



(51) International Patent Classification:
H04L 5/00 (2006.01) H04L 1/18 (2006.01)

(21) International Application Number:
PCT/EP2012/069193

(22) International Filing Date:
28 September 2012 (28.09.2012)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: NOKIA SIEMENS NETWORKS OY
[FI/FI]; Karaportti 3, FIN-02610 Espoo (FI).

(72) Inventors: ZHANG, Li; Beiyuanjiayuan Xiujvuyuan 6-
2003, Chaoyang District, Beijing 100012 (CN). LUNT-
TILA, Timo Erkki; Tontunmäentie 34 F, FIN-02200 Es-
poo (FI). TIROLA, Esa Tapani; Porttikellonkuja 12,
FIN-90450 Kempele (FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PUCCH RESOURCE ALLOCATION FOR E-PDCCH IN COMMUNICATIONS SYSTEM

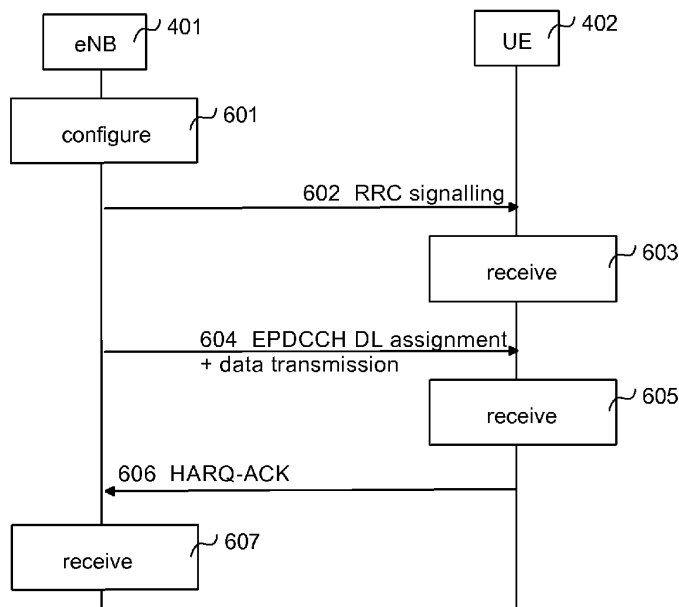


Fig. 6

(57) Abstract: An exemplary embodiment discloses a multi-subframe physical uplink control channel PUCCH resource arrangement for PUCCH format 1 a/1 b resource allocation for enhanced physical downlink control channel EPDCCH in time division duplex TDD transmission. A definition of a semi-static offset for each EPDCCH set is extended by considering multiple downlink subframes, and a dynamic offset mechanism is enhanced to avoid resource collision between multiple DL subframes.

WO 2014/048487 A1



Published:

— *with international search report (Art. 21(3))*

DESCRIPTION

TITLE

**PUCCH RESOURCE ALLOCATION FOR E-PDCCH IN COMMUNICATIONS
5 SYSTEM**

FIELD OF THE INVENTION

The exemplary and non-limiting embodiments of this invention relate generally to wireless communications networks, and more particularly to resource allocation.

10 BACKGROUND ART

The following description of background art may include insights, discoveries, understandings or disclosures, or associations together with disclosures not known to the relevant art prior to the present invention but provided by the invention. Some such contributions of the invention may be specifically pointed out below,
15 whereas other such contributions of the invention will be apparent from their context.

PUCCH (physical uplink control channel) carries uplink control information, and supports multiple formats, such as 1, 1a, 1b, 2, 2a, 2b, and 3. If PUCCH is enabled, there is at least one resource block in a frequency domain reserved for PUCCH. In a time domain, each slot has a PUCCH resource block in an FDD mode,
20 and each uplink slot has a PUCCH RB in a TDD mode. PUCCH format 1/1a/1b resources are identified by a resource index.

SUMMARY

The following presents a simplified summary of the invention in order to provide a basic understanding of some aspects of the invention. This summary is not
25 an extensive overview of the invention. It is not intended to identify key/critical elements of the invention or to delineate the scope of the invention. Its sole purpose is to present some concepts of the invention in a simplified form as a prelude to the more detailed description that is presented later.

Various aspects of the invention comprise a method, apparatuses, a computer program product, and a computer-readable storage medium as defined in the independent claims. Further embodiments of the invention are disclosed in the dependent claims.
30

An aspect of the invention relates to a method for resource allocation in a communications system, the method comprising determining, in a network apparatus,

PUCCH format 1a/1b resources for HARQ-ACK for time division duplex signalling based on an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe, the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and one or more configured parameters.

5 A further aspect of the invention relates to an apparatus comprising at least one processor; and at least one memory including a computer program code, wherein the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to determine PUCCH format
10 1a/1b resources for HARQ-ACK for time division duplex signalling based on an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe, the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and one or more configured parameters.

15 A still further aspect of the invention relates to a user terminal comprising at least one processor; and at least one memory including a computer program code, wherein the at least one memory and the computer program code are configured to, with the at least one processor, cause the user terminal to apply PUCCH format 1a/1b resource mapping for EPDCCH scheduled PDSCH for time division duplex signalling
20 based on an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe, the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and one or more configured parameters.

25 A still further aspect of the invention relates to a computer program product comprising program code means configured to perform any of the method steps when the program is run on a computer.

A still further aspect of the invention relates to a computer-readable storage medium comprising program code means configured to perform any of the method steps when executed on a computer.

30 BRIEF DESCRIPTION OF THE DRAWINGS

In the following the invention will be described in greater detail by means of preferred embodiments with reference to the attached drawings, in which

Figure 1 illustrates a multi-SF PUCCH resource arrangement by following Rel-8/9/10;

35 Figure 2 illustrates an exemplary multi-SF PUCCH resource arrangement

with a fully orthogonal PUCCH region;

Figure 3 illustrates another exemplary multi-SF PUCCH resource arrangement with a fully orthogonal PUCCH region;

Figure 4 shows a simplified block diagram illustrating exemplary system architecture;

Figure 5 shows a simplified block diagram illustrating exemplary apparatuses;

Figure 6 shows a signalling diagram illustrating an exemplary messaging event according to an embodiment of the invention;

Figure 7 shows a schematic diagram of a flow chart according to an exemplary embodiment of the invention;

Figure 8 shows a schematic diagram of a flow chart according to an exemplary embodiment of the invention.

DETAILED DESCRIPTION OF SOME EMBODIMENTS

PUCCH format 1a/1b resource allocation for HARQ-ACKs corresponding to PDSCH transport block scheduled via EPDCCH was discussed in the 3GPP RAN1#70 meeting. It was agreed that: the lowest eCCE index of the corresponding EPDCCH is a component of PUCCH resource determination; UE is configured with a semi-static PUCCH resource starting offset for each EPDCCH set (eCCE is indexed per EPDCCH set); for further study until RAN1#70bis between:

- option A) not to use dynamically signalled PUCCH resource offset by EPDCCH,
- option B) dynamically signalled PUCCH resource offset by EPDCCH,
- whichever of options A and B is chosen, RRC signalling is not introduced;

FFS until RAN1#70bis for localized EPDCCH among:

- option X) not to use antenna port index,
 - option Y) to use antenna port index of EPDCCH,
 - option Z) to use antenna port index of PDSCH;
- TDD aspects are FFS – if solutions are needed, aim for solutions without RRC impact.

The lowest eCCE index of the EPDCCH DL assignment scheduling the PDSCH data is used as a resource index in implicit PUCCH resource allocation. Additionally, a semi-static resource starting offset is configurable for each EPDCCH set (configuration of an EPDCCH set is UE specific), which may be used e.g. to avoid

PUCCH resource collision between EPDCCH and PDCCH as well as different EPDCCH sets.

Considering the efficiency of PUCCH resource utilization (or total PUCCH overhead in UL), the resource region for HARQ-ACK corresponding to PDSCH scheduled via PDCCH and/or different EPDCCH sets may be configured to be overlapped. To avoid collisions, a dynamic resource offset that is signalled in DL DCIs via EPDCCH (i.e. the same DCI the schedules the PDSCH) might additionally be adopted. It should be noted that this dynamic offset may be viewed as a selection among multiple resources, and each resource should be linked to the implicitly derived resource (instead of explicitly configured resource, like format 1a/1b resource for SCell in CA).

Considering the possibility of MU-MIMO on EPDCCH, an antenna port (AP) index might be included in the implicit resource mapping for localized EPDCCH.

The above discussions are mainly considering FDD, not whether additional specification support is needed for TDD. An exemplary embodiment is handling PUCCH resource allocation for HARQ-ACKs corresponding to PDSCH scheduled via EPDCCH in the case of TDD operation.

An issue in PUCCH format 1a/1b resource allocation for TDD is that more than one DL subframe may be associated with a single UL subframe. As shown in Table 1, HARQ-ACKs corresponding to M (may be 1, 2, 3, 4 (only up to four subframes need to be supported with A/N multiplexing in combination with channel selection; UL-DL configuration #5 is considered as a special case as it only supports A/N bundling)) DL subframes are reported in one UL subframe. That means that if nothing is specified beyond RAN1#70 agreements, PUCCH resources corresponding to M DL subframes collide.

Table 1. Downlink association set index K : $K: \{k_0, k_1, \dots, k_{M-1}\}$ for TDD

UL-DL Configuration	Subframe n									
	0	1	2	3	4	5	6	7	8	9
0	-	-	6	-	4	-	-	6	-	4
1	-	-	7, 6	4	-	-	-	7, 6	4	-
2	-	-	8, 7, 4, 6	-	-	-	-	8, 7, 4, 6	-	-
3	-	-	7, 6, 11	6, 5	5, 4	-	-	-	-	-
4	-	-	12, 8, 7, 11	6, 5, 4, 7	-	-	-	-	-	-
5	-	-	13, 12, 9, 8, 7, 5, 4, 11, 6	-	-	-	-	-	-	-
6	-	-	7	7	5	-	-	7	7	-

The dynamic resource offset may be used to avoid such a collision, but it has not been decided whether it is to be adopted; and even if so, it may not be sufficient to further handle the resource collision between multiple DL subframes (on top of the collisions between PUCCH format 1a/b resources corresponding to PDCCH and different EPDCCH sets corresponding to different UEs).

To summarize, the arrangement of PUCCH resources corresponding to multiple DL subframes (multi-SF PUCCH resource arrangement) involves a problem. Specifically, if a separate PUCCH resource region is reserved for HARQ-ACKs corresponding to each DL subframe, a question is, how to define the semi-static resource starting offset for each EPDCCH set, and, if resources regions for different DL subframes may be overlapped, how to further solve the PUCCH resource collision between HARQ-ACKs corresponding to multiple DL subframes.

In existing solutions, for PDCCH in Rel-8/9/10 TDD operation, PUCCH resources corresponding to multiple DL subframes are concatenated and interleaved in the associated UL subframe (e.g. with 40 CCEs per DL subframe and $M=2$, 80 PUCCH resources are reserved), so that there is no resource collision between different subframes. To be specific, the PDCCH resources corresponding to PDCCH OFDM symbols [s1, s2, s3, ...] and subframes [SF1, SF2, SF3, ...] are mapped to PUCCH in the following order:

- SF1-s1
- SF2-s1
- SF3-s1
- ...
- SF1-s2
- SF2-s2
- SF3-s2
- ...

The downside of this arrangement is that the UL overhead is also maximized as the PUCCH regions corresponding to different DL subframes and PDCCH OFDM-symbols are fully non-overlapping.

However, directly re-using of Rel-8/9/10 principle is not a favourable solution because the PDCCH and corresponding PUCCH resource region is common to each UE in the cell, but the EPDCCH set and corresponding PUCCH region is UE-specific. Hence, concatenation of PUCCH resource regions corresponding to different DL subframes is not able to guarantee a collision free operation. Alternatively, if the offset parameter for Set 2 is configured to be large enough to avoid collisions when

M>1, there would be excessive PUCCH resource overhead due to resource fragmentation.

Figure 1 illustrates a N_{UE}-PUCCH configuration assuming M=1, and directly re-using of Rel-8/9/10 principle, wherein two EPDCCH sets (Set 1 and Set 2) are configured. Figure 1 is an illustration of multi-SF PUCCH resource arrangement by simply following Rel-8/9/10. The PUCCH resources for two EPDCCH sets overlap/collide in case the HARQ-ACKs from multiple subframes map into a single UL subframe. Figure 1 may be considered to correspond to TDD UL-DL configuration 1 (see Table 1), wherein from a HARQ-ACK signalling point of view, some of the UL subframes (#3 & #8) are associated with a single DL subframe (as in the upper part of Figure 1), whereas some other UL subframes (#2, #7) are associated with two DL subframes (the lower part of Figure 1). The semi-static offsets for Set 1 and Set 2 are N_{UE-PUCCH_1}, and N_{UE-PUCCH_2}, respectively. With the configuration as in the Figure 1, this leads to having completely separate PUCCH regions for Set 1 and Set 2 in the upper part of Figure 1. With simply placing resource for SF2 after resource for SF1 for each EPDCCH set, there is a collision between {set1, SF2}, {set2, SF1} and {set2, SF2} as in the lower part of Figure 1. This means that collision avoidance by semi-static offset is only valid for the first DL subframe. It is also noted that even with dynamic offset, it is difficult for a practical scheduler to handle collisions in case overlapping resources relate to different subframes (for example, Figure 1).

In the case of FDD, the PUCCH format 1a/1b HARQ-ACK resource in response to EPDCCH scheduled PDSCH may be described with the following formula (RAN1#70 agreement):

$$n_{PUCCH}^{(l)} = n_{eCCE} + N_{UE-PUCCH}^{(l)} + k,$$

where $n_{PUCCH}^{(l)}$ is the PUCCH format 1a/b resource for the HARQ-ACK, n_{eCCE} is the index of the lowest eCCE of the detected EPDCCH carrying the DL assignment, $N_{UE-PUCCH}^{(l)}$ is UE- and EPDCCH-set-specific PUCCH resources offset configured by higher layers (via a protocol layer higher than the physical layer), and k is a dynamic offset modifier such as an antenna port-specific offset associated with antenna port p , where p is the antenna port allocated to the first CCE of corresponding EPDCCH or other explicitly signalled or implicitly derived parameter. It should be noted that according to the decisions in RAN1#70, it has not yet been confirmed whether k is needed or not.

An exemplary embodiment relates to PUCCH format 1a/1b resource allo-

cation for EPDCCH in TDD. An exemplary embodiment is handling the multi-SF PUCCH resource arrangement format 1a/1b resource allocation for EPDCCH in TDD. The definition of semi-static offset for each EPDCCH set is extended by considering multiple DL subframes, and dynamic offset mechanism is enhanced to solve the resource collision between multiple DL subframes.

In an exemplary embodiment, regarding extended definition of semi-static resource starting offset for each EPDCCH set, resource collisions may be avoided by providing a mechanism to adjust the implicit resource allocation so that it adapts to the number of DL subframes mapping to a single UL subframe. EPDCCH scheduling restrictions may be minimized by allowing for a possibility of having fully orthogonal PUCCH format 1a/b resources for a given UE and/or EPDCCH set.

In an exemplary embodiment, a single semi-static UE-specific resource starting offset $N_{\text{UE-PUCCH}}^{(1)}$ may be configured for each EPDCCH set assuming $M=1$. Additionally, for the case of TDD, another parameter, $N_{\text{UE-PUCCH-TDD}}^{(1)}$ may be introduced impacting the resource allocation formula when $M>1$, i.e. when PUCCH HARQ-ACK resources for multiple DL subframes map into a single UL subframe.

In an exemplary embodiment, when $M>1$, the offset applied in each DL subframe is dependent on $N_{\text{UE-PUCCH}}^{(1)}$, $N_{\text{UE-PUCCH-TDD}}^{(1)}$ and m , where m ($0 \dots M-1$) is the relative index of the DL subframe. Compared with the prior art FDD formula, this means that an additional TDD-specific adjustment based on $N_{\text{UE-PUCCH-TDD}}^{(1)}$ is applied. This allows for avoiding the problem depicted in Figure 1, by fully separating the PUCCH resources related to EPDCCH Set1 and Set2, as in Figure 2, Figure 2 being an illustration of a multi-SF PUCCH resource arrangement with a fully orthogonal PUCCH region.

In an exemplary embodiment, regarding enhancement of dynamic offset mechanism to solve multi-SF resource collision, besides the semi-static offset, it is proposed to apply an alternative/complementary dynamic offset modifier k for TDD on top of semi-static (+ subframe specific) offset parameters. A starting point is to apply dynamic offset modifier which does not depend on the parameter m . In other words, dynamic offset modifier (if available) is derived from the content downlink control information which EPDCCH is carrying.

In an exemplary embodiment, it may also be possible to define an enhanced version of dynamic offset which depends on the subframe index m . In that case multiple (typically M) sets of dynamic offset modifiers may be specified or configured, and the subframe index m may be used as one factor to determine the value of the dynamic offset modifier k (Res_i, m), where Res_i is the resource index sig-

nalled in DL DCI via EPDCCH.

An exemplary embodiment of dynamic offset is where $k(\text{Res_i}, m)$ is defined to be $C(m)$ with $m \geq 1$. For example, when a predefined condition such as when $m=1$, the index of the A/N resource corresponding to the 2nd subframe is derived from the resource index of the first subframe $X_{m=0}$ as $(X_{m=0})+C$, where C is a predefined number (e.g. 1 or 3). In more generic terms, there may be a matrix $\mathbf{C}$ with $(M-1)$ columns and n rows (n corresponds to number of options behind the dynamic switching). The matrix $\mathbf{C}$ may be configured via higher layers (via a protocol layer higher than the physical layer).

In an exemplary embodiment, the resource allocation formula for TDD may be described using the notation from a 3GPP specification as:

$$n_{PUCCH}^{(1)} = N_{UE-PUCCH-TDD}^{(1)} * m + n_{eCCE} + N_{UE-PUCCH}^{(1)} + k ,$$

where $N_{UE-PUCCH-TDD}^{(1)}$ is a parameter specific for a TDD operation. $N_{UE-PUCCH-TDD}^{(1)}$ may be configured semi-statically and signalled via RRC signalling, or it may be e.g. equal to or a multiple of the number eCCEs in the given EPDCCH set. A resulting PUCCH resource arrangement is shown in Figure 2. n_{eCCE} is the number of the first eCCE used for transmission of the corresponding EPDCCH in subframe $n - k_m$. UE selects the corresponding m , where $m(0 \dots M-1)$ is the relative index of the DL subframe of PDSCH scheduled by EPDCCH derived from Table 1. k is a dynamic offset modifier such as an antenna port-specific offset associated with antenna port p , where p is the antenna port allocated to the first eCCE of a corresponding EPDCCH or other explicitly signalled or implicitly derived parameter.

Regarding the values for the parameters, in order to achieve the PUCCH resource arrangement in Figure 2, the parameter $N_{UE-PUCCH-TDD}^{(1)}$ may be set as (number of PUCCH resources corresponding to EPDCCH Set 1 + number of PUCCH resources corresponding to EPDCCH Set 2), or equivalently as (# of eCCEs in EPDCCH Set 1 + # of eCCEs in EPDCCH Set 2). It should be noted that eNB may configure another value for $N_{UE-PUCCH-TDD}^{(1)}$ to flexibly control the multi-SF PUCCH resource arrangement.

It should also be noted that $N_{UE-PUCCH-TDD}^{(1)} * m$ may be considered as a specific form of the additional TDD-specific adjustment based on $N_{UE-PUCCH-TDD}^{(1)}$. An example may be $N_{UE-PUCCH-TDD}^{(1)} * (M-1) + m * L$ which leads to a PUCCH resource arrangement shown in Figure 3, Figure 3 being an illustration of another multi-SF

PUCCH resource arrangement with fully orthogonal PUCCH region, where L is the number of PUCCH resources in the corresponding EPDCCH set. Another possibility is that multiple (typically M) $N_{\text{UE-PUCCH-TDD}}^{(1)}$ parameters may be configured for an EPDCCH set, one for each DL subframe.

5 Interleaving among resources corresponding to multiple DL subframes may also be possible.

In an exemplary embodiment, an extended definition of semi-static resource starting offset for each EPDCCH set enables a full PUCCH resource separation between different DL subframes; in particular, the subframe-specific configuration
10 enables providing a very flexible support.

An exemplary embodiment enables maximizing the similarity between FDD and TDD modes. If $M=1$ ($N_{\text{UE-PUCCH-TDD}}^{(1)}$ is not in use), then the resource allocation corresponds to that of an FDD solution.

An exemplary embodiment allows to trade-off the scheduler flexibility and
15 PUCCH resource consumption. With a minimum overhead, PUCCH resources corresponding to different subframes may be made fully overlapping ($N_{\text{UE-PUCCH-TDD}}^{(1)} = 0$). With maximum overhead, PUCCH resources corresponding to different subframes may be made fully orthogonal.

An exemplary embodiment allows making subframe alignment for the
20 PUCCH resources corresponding to different EPDCCH sets. This simplifies the scheduler implementation, since there are no collisions among different subframes.

Enhancement of dynamic offset mechanism enables providing additional flexibility to solve a multi-SF resource collision in cases where PUCCH resource regions corresponding to different DL subframes are overlapped.

25 Exemplary embodiments will now be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, the invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable
30 legal requirements. Although the specification may refer to "an", "one", or "some" embodiment(s) in several locations, this does not necessarily mean that each such reference is to the same embodiment(s), or that the feature only applies to a single embodiment. Single features of different embodiments may also be combined to provide other embodiments. Like reference numerals refer to like elements throughout.

35 The present invention is applicable to any user terminal, network node, server, corresponding component, and/or to any communication system or any com-

5 combination of different communication systems that support PUCCH resource allocation for HARQ-ACK corresponding to PDSCH scheduled via EPDCCH. Other use cases related to EPDCCH may be considered as well, e.g. signalling related to semi-persistent scheduling. The communication system may be a fixed communication system or a wireless communication system or a communication system utilizing both fixed networks and wireless networks. The protocols used, the specifications of communication systems, servers and user terminals, especially in wireless communication, develop rapidly. Such development may require extra changes to an embodiment. Therefore, all words and expressions should be interpreted broadly and they are intended to illustrate, not to restrict, the embodiment.

10 In the following, different embodiments will be described using, as an example of a system architecture where the embodiments may be applied, an architecture based on LTE (or LTE-A) (long term evolution (advanced long term evolution)) network elements, without restricting the embodiment to such an architecture, however. The embodiments described in these examples are not limited to the LTE radio systems but can also be implemented in other radio systems, such as UMTS (universal mobile telecommunications system), GSM, EDGE, WCDMA, bluetooth network, WLAN or other fixed, mobile or wireless network. In an embodiment, the presented solution may be applied between elements belonging to different but compatible systems such as LTE and UMTS.

15 A general architecture of a communication system is illustrated in Figure 4. Figure 4 is a simplified system architecture only showing some elements and functional entities, all being logical units whose implementation may differ from what is shown. The connections shown in Figure 4 are logical connections; the actual physical connections may be different. It is apparent to a person skilled in the art that the systems also comprise other functions and structures. It should be appreciated that the functions, structures, elements and the protocols used in or for PUCCH resource allocation, are irrelevant to the actual invention. Therefore, they need not to be discussed in more detail here.

20 A general architecture of a communication system is illustrated in Figure 4. Figure 4 is a simplified system architecture only showing some elements and functional entities, all being logical units whose implementation may differ from what is shown. The connections shown in Figure 4 are logical connections; the actual physical connections may be different. It is apparent to a person skilled in the art that the systems also comprise other functions and structures. It should be appreciated that the functions, structures, elements and the protocols used in or for PUCCH resource allocation, are irrelevant to the actual invention. Therefore, they need not to be discussed in more detail here.

25 The exemplary radio system of Figure 4 comprises a network node 401 of a network operator. The network node 401 may include e.g. an LTE base station (eNB), radio network controller (RNC), or any other network element, or a combination of network elements. The network node 401 may be connected to one or more core network (CN) elements (not shown in Figure 4) such as a mobile switching centre (MSC), MSC server (MSS), mobility management entity (MME), gateway GPRS support node (GGSN), serving GPRS support node (SGSN), home location register

(HLR), home subscriber server (HSS), visitor location register (VLR). In Figure 4, the radio network node 401 that may also be called eNB (enhanced node-B, evolved node-B) or network apparatus of the radio system, hosts the functions for radio resource management in a public land mobile network. Figure 4 shows one or more
5 user equipment 402 located in the service area of the radio network node 401. The user equipment refers to a portable computing device, and it may also be referred to as a user terminal. Such computing devices include wireless mobile communication devices operating with or without a subscriber identification module (SIM) in hardware or in software, including, but not limited to, the following types of devices: mobile
10 phone, smart-phone, personal digital assistant (PDA), handset, laptop computer. In the example situation of Figure 4, the user equipment 402 is capable of connecting to the radio network node 401 via a connection 403.

Figure 5 is a block diagram of an apparatus according to an embodiment of the invention. Figure 5 shows a user equipment 402 located in the area of a radio
15 network node 401. The user equipment 402 is configured to be in connection with the radio network node 401. The user equipment or UE 402 comprises a controller 501 operationally connected to a memory 502 and a transceiver 503. The controller 501 controls the operation of the user equipment 402. The memory 502 is configured to store software and data. The transceiver 503 is configured to set up and maintain a
20 wireless connection 403 to the radio network node 401. The transceiver 503 is operationally connected to a set of antenna ports 504 connected to an antenna arrangement 505. The antenna arrangement 505 may comprise a set of antennas. The number of antennas may be one to four, for example. The number of antennas is not limited to any particular number. The user equipment 402 may also comprise various
25 other components, such as a user interface, camera, and media player. They are not displayed in the figure due to simplicity. The radio network node 401, such as an LTE base station (eNode-B, eNB) comprises a controller 506 operationally connected to a memory 507, and a transceiver 508. The controller 506 controls the operation of the radio network node 401. The memory 507 is configured to store software and data.
30 The transceiver 508 is configured to set up and maintain a wireless connection to the user equipment 402 within the service area of the radio network node 401. The transceiver 508 is operationally connected to an antenna arrangement 509. The antenna arrangement 509 may comprise a set of antennas. The number of antennas may be two to four, for example. The number of antennas is not limited to any particular number.
35 The radio network node 401 may be operationally connected (directly or indirectly) to another network element (not shown in Figure 6) of the communication sys-

tem, such as a radio network controller (RNC), a mobility management entity (MME), an MSC server (MSS), a mobile switching centre (MSC), a radio resource management (RRM) node, a gateway GPRS support node, an operations, administrations and maintenance (OAM) node, a home location register (HLR), a visitor location register (VLR), a serving GPRS support node, a gateway, and/or a server, via an interface. The embodiments are not, however, restricted to the network given above as an example, but a person skilled in the art may apply the solution to other communication networks provided with the necessary properties. For example, the connections between different network elements may be realized with internet protocol (IP) connections.

Although the apparatus 401, 402 has been depicted as one entity, different modules and memory may be implemented in one or more physical or logical entities. The apparatus may also be a user terminal which is a piece of equipment or a device that associates, or is arranged to associate, the user terminal and its user with a subscription and allows a user to interact with a communications system. The user terminal presents information to the user and allows the user to input information. In other words, the user terminal may be any terminal capable of receiving information from and/or transmitting information to the network, connectable to the network wirelessly or via a fixed connection. Examples of the user terminals include a personal computer, a game console, a laptop (a notebook), a personal digital assistant, a mobile station (mobile phone), a smart phone, and a line telephone.

The apparatus 401, 402 may generally include a processor, controller, control unit or the like connected to a memory and to various interfaces of the apparatus. Generally the processor is a central processing unit, but the processor may be an additional operation processor. The processor may comprise a computer processor, application-specific integrated circuit (ASIC), field-programmable gate array (FPGA), and/or other hardware components that have been programmed in such a way to carry out one or more functions of an embodiment.

The memory 502, 507 may include volatile and/or non-volatile memory and typically stores content, data, or the like. For example, the memory 502, 507 may store computer program code such as software applications (for example for the detector unit and/or for the adjuster unit) or operating systems, information, data, content, or the like for a processor to perform steps associated with operation of the apparatus in accordance with embodiments. The memory may be, for example, random access memory (RAM), a hard drive, or other fixed data memory or storage device. Further, the memory, or part of it, may be removable memory detachably connected

to the apparatus.

The techniques described herein may be implemented by various means so that an apparatus implementing one or more functions of a corresponding mobile entity described with an embodiment comprises not only prior art means, but also means for implementing the one or more functions of a corresponding apparatus described with an embodiment and it may comprise separate means for each separate function, or means may be configured to perform two or more functions. For example, these techniques may be implemented in hardware (one or more apparatuses), firmware (one or more apparatuses), software (one or more modules), or combinations thereof. For a firmware or software, implementation can be through modules (e.g., procedures, functions, and so on) that perform the functions described herein. The software codes may be stored in any suitable, processor/computer-readable data storage medium(s) or memory unit(s) or article(s) of manufacture and executed by one or more processors/computers. The data storage medium or the memory unit may be implemented within the processor/computer or external to the processor/computer, in which case it can be communicatively coupled to the processor/computer via various means as is known in the art.

The signalling chart of Figure 6 illustrates the required signalling. In the example of Figure 6, a network node 401 (which may comprise e.g. a LTE-capable base station (eNode-B, eNB)) may transmit a configuration signal 602 to a user terminal 402 (UE), for configuring UE 402 to transmit a HARQ-ACK signal 606 by utilizing a PUCCH format 1a/b resource for EPDCCH signalling in TDD. This signalling 602 may be e.g. dedicated higher layer (i.e. higher than L1) signalling (e.g. RRC signalling). Before transmitting the signalling 602, eNB 401 may configure the resources in item 601. In item 603, UE 402 may receive the configuration signal 602. In item 604, a EPDCCH DL assignment and data is transmitted from eNB 401 to UE 402. In item 605, UE 402 receives the EPDCCH DL assignment which schedules DL data, wherein UE 402 detects EPDCCH eCCE and uses the index of the first eCCE in determining the HARQ-ACK resource. In step 605, UE 402 applies the resource allocation formula based on the configured parameters and the eCCE index. The formula gives as an output an UL (PUCCH) resource by which the HARQ-ACK 606 is transmitted from UE 402 to eNB 401. In item 606, UE 402 may transmit the HARQ-ACK signal 606 by utilizing the determined PUCCH format 1a/b resource for EPDCCH signalling in TDD. In item 607, eNB 401 may receive the HARQ-ACK signalling 606 from UE 402.

Figure 7 is a flow chart illustrating an exemplary embodiment. The apparatus 402, which may comprise e.g. a network element (network node, e.g. a user ter-

minal, UE) receives, in item 701, from a network apparatus 401 (which may comprise e.g. a LTE base station eNB 401) a configuration signal for configuring UE 402 to transmit a HARQ-ACK signal by utilizing a PUCCH format 1a/b resource for EPDCCH signalling in TDD. The received configuration signalling may be e.g. dedicated higher layer signalling, e.g. RRC signalling. In item 702, UE 402 transmits a HARQ-ACK signal to eNB 401 by utilizing the configured PUCCH format 1a/b resource for EPDCCH signalling in TDD.

Figure 8 is a flow chart illustrating an exemplary embodiment. The apparatus 401, which may comprise e.g. a network element (network node 401, e.g. a LTE base station, eNB) transmits, in item 802, to another network element (network node 402, e.g. a user terminal, UE) a configuration signal for configuring UE 402 to transmit a HARQ-ACK signal by utilizing a PUCCH format 1a/b resource for EPDCCH signalling in TDD. The configuration signalling transmitted in item 802 may be e.g. dedicated higher layer signalling. Before transmitting the signalling in item 802, eNB 401 may configure the resources in item 801. In item 803, eNB 401 may receive the HARQ-ACK signalling transmitted from UE 401 by utilizing the configured PUCCH format 1a/b resource for EPDCCH signalling in TDD.

The steps/points, signalling messages and related functions described above in Figures 1 to 8 are in no absolute chronological order, and some of the steps/points may be performed simultaneously or in an order differing from the given one. Other functions can also be executed between the steps/points or within the steps/points and other signalling messages sent between the illustrated messages. Some of the steps/points or part of the steps/points can also be left out or replaced by a corresponding step/point or part of the step/point. The apparatus operations illustrate a procedure that may be implemented in one or more physical or logical entities. The signalling messages are only exemplary and may even comprise several separate messages for transmitting the same information. In addition, the messages may also contain other information.

Thus, according to an exemplary embodiment, there is provided a method for resource allocation in a communications system, comprising determining, in a network apparatus, PUCCH format 1a/1b resources for HARQ-ACK for time division duplex signalling based on an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe, the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and one or more configured parameters.

According to another exemplary embodiment, the one or more configured

parameters comprising one or more of a first semi-static user terminal-specific resource starting offset defined for an EPDCCH set, a second user terminal-specific resource offset defined for each EPDCCH set, a dynamic offset modifier.

- According to yet another exemplary embodiment, a multi-subframe
 5 PUCCH format 1a/1b resource allocation is carried out for HARQ-ACK corresponding to PDSCH scheduled via EPDCCH.

According to yet another exemplary embodiment, when $M=1$, the resource determination is independent of the second user terminal-specific resource offset.

- According to yet another exemplary embodiment, for time division duplex
 10 signalling when $M>1$, the second user terminal-specific resource offset impacts resource allocation when PUCCH HARQ-ACK resources for multiple downlink subframes map into a single uplink subframe.

- According to yet another exemplary embodiment, the offset for each
 EPDCCH set applied in each downlink subframe is dependent on the first semi-static
 15 user terminal-specific resource starting offset, the second user terminal-specific resource offset, and m , where $m(0 \dots M-1)$ is a relative index of the downlink subframe, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback.

- According to yet another exemplary embodiment, the dynamic offset modifier
 20 fier is dependent on an antenna port or a power control command.

According to yet another exemplary embodiment, the dynamic offset modifier is applied such that it is independent on a subframe index m , wherein the dynamic offset modifier is derived based on downlink control information DCI that EPDCCH is carrying.

- According to yet another exemplary embodiment, the dynamic offset modifier
 25 fier is applied such that the dynamic offset modifier depends on a subframe index m , wherein multiple sets of dynamic offset modifiers are defined to be a matrix C with $(M-1)$ columns and N rows, N corresponding to the number of options to perform dynamic switching, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback, and the subframe index m is used as one factor to
 30 determine the value of the dynamic offset modifier $k(n, m)$, where n is an index of dynamic switching option signalled as downlink control information DCI via EPDCCH.

- According to yet another exemplary embodiment, the resource index of the ACK/NACK resource corresponding to the m -th subframe X_m is derived from the
 35 resource index of the first subframe X_0 as $X_0 + C(m)$, where $C(m)$ is a predefined constant number.

According to yet another exemplary embodiment, the matrix C is configured via a protocol layer higher than the physical layer.

According to yet another exemplary embodiment, the dynamic offset modifier k is an antenna port-specific offset associated with antenna port p , where p is the antenna port allocated to the first control channel element CCE of corresponding EPDCCH or other explicitly signalled or implicitly derived parameter.

According to yet another exemplary embodiment, the method comprises scheduling the PUCCH format 1a/1b resources for EPDCCH for time division duplex signalling based on formula I:

10

$$(I) \quad n_{PUCCH}^{(1)} = N_{UE-PUCCH-TDD}^{(1)} * m + n_{eCCE} + N_{UE-PUCCH}^{(1)} + k,$$

where $n_{PUCCH}^{(1)}$ is a PUCCH format 1a/1b resource to be allocated for a HARQ-ACK signal; $N_{UE-PUCCH}^{(1)}$ is the first semi-static user terminal-specific resource starting offset defined for an EPDCCH set; $N_{UE-PUCCH-TDD}^{(1)}$ is the second user terminal-specific resource offset defined for EPDCCH sets when $M > 1$, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback, m being a relative index of a downlink subframe, wherein $0 \leq m \leq M-1$; n_{eCCE} is an index of the first enhanced control channel element eCCE used for transmission of a corresponding EPDCCH downlink assignment in a downlink subframe $n-k_m$, where m is the relative index of the downlink subframes and $0 \leq m \leq M-1$; k is the dynamic offset modifier.

According to yet another exemplary embodiment, there is provided an apparatus comprising at least one processor; and at least one memory including a computer program code, wherein the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to determine PUCCH format 1a/1b resources for HARQ-ACK for time division duplex signalling based on an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe, the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and one or more configured parameters.

According to yet another exemplary embodiment, the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to carry out a multi-subframe PUCCH format 1a/1b resource allocation for HARQ-ACK corresponding to PDSCH scheduled via EPDCCH.

According to yet another exemplary embodiment, the at least one memory

and the computer program code are configured to, with the at least one processor, cause the apparatus to apply the dynamic offset modifier k dependent on an antenna port or a power control command.

According to yet another exemplary embodiment, the at least one memory
 5 and the computer program code are configured to, with the at least one processor, cause the apparatus to apply the dynamic offset modifier such that it is independent on a subframe index m , wherein the dynamic offset modifier is derived based on downlink control information DCI that EPDCCH is carrying.

According to yet another exemplary embodiment, the at least one memory
 10 and the computer program code are configured to, with the at least one processor, cause the apparatus to apply the dynamic offset modifier such that the dynamic offset modifier depends on a subframe index m , wherein multiple sets of dynamic offset modifiers are defined to be a matrix C with $(M-1)$ columns and N rows, N corresponding to the number of options to perform dynamic switching, M being the number of
 15 downlink subframes associated with an uplink subframe for HARQ-ACK feedback, and the subframe index m is used as one factor to determine the value of the dynamic offset modifier $k(n, m)$, where n is an index of dynamic switching option.

According to yet another exemplary embodiment, the at least one memory
 and the computer program code are configured to, with the at least one processor,
 20 cause the apparatus to define the matrix C via a protocol layer higher than the physical layer.

According to yet another exemplary embodiment, the at least one memory
 and the computer program code are configured to, with the at least one processor, cause the apparatus to set the second user terminal-specific resource offset as the
 25 number of PUCCH resources corresponding to a first EPDCCH set + the number of PUCCH resources corresponding to a second EPDCCH set; or the number of eCCEs in the first EPDCCH set + the number of eCCEs in the second EPDCCH set.

According to yet another exemplary embodiment, the at least one memory
 and the computer program code are configured to, with the at least one processor,
 30 cause the apparatus to schedule the PUCCH format 1a/1b resources for EPDCCH for time division duplex signalling based on formula I:

$$(II) \quad n_{PUCCH}^{(i)} = N_{UE-PUCCH-TDD}^{(1)} * m + n_{eCCE} + N_{UE-PUCCH}^{(1)} + k,$$

35 where
 $n_{PUCCH}^{(i)}$ is a PUCCH format 1a/1b resource to be allocated for a HARQ-

ACK signal; $N_{\text{UE-PUCCH}}^{(1)}$ is the first semi-static user terminal-specific resource starting offset defined for an EPDCCH set; $N_{\text{UE-PUCCH-TDD}}^{(1)}$ is the second user terminal-specific resource offset defined for EPDCCH sets when $M > 1$, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback, m being a relative index of a downlink subframe, wherein $0 \leq m \leq M-1$; n_{eCCE} is an index of the first enhanced control channel element eCCE used for transmission of a corresponding EPDCCH downlink assignment in a downlink subframe $n - k_m$, where m is the relative index of the downlink subframes and $0 \leq m \leq M-1$; k is a dynamic offset modifier.

According to yet another exemplary embodiment, there is provided a user terminal comprising at least one processor; and at least one memory including a computer program code, wherein the at least one memory and the computer program code are configured to, with the at least one processor, cause the user terminal to apply PUCCH format 1a/1b resource mapping for EPDCCH scheduled PDSCH for time division duplex signalling based on an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe, the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and one or more configured parameters.

According to yet another exemplary embodiment, there is provided a computer program product comprising program code means configured to perform any of the method steps when the program is run on a computer.

According to yet another exemplary embodiment, there is provided a computer-readable storage medium comprising program code means configured to perform any of the method steps when executed on a computer.

25

List of abbreviations

	A/N	acknowledgement (ACK)/negative ACK
	EPDCCH	enhanced physical downlink control channel
5	PUCCH	physical uplink control channel
	PDCCH	physical downlink control channel
	AP	antenna port
	DCI	downlink control information
	SF	subframe
10	eCCE	enhanced control channel element
	TDD	time division duplex
	HARQ	hybrid automatic repeat request
	PDSCH	physical downlink shared channel
	3GPP	3 rd generation partnership project
15	RAN	radio access network
	RRC	radio resource control
	DL	downlink
	UL	uplink
	MU-MIMO	multi user multiple input multiple output
20	CA	carrier aggregation
	FDD	frequency division duplex
	UE	user equipment
	OFDM	orthogonal frequency division multiplexing
	Rel	release
25	CCE	control channel element

CLAIMS

1. A method for resource allocation in a communications system, **characterized** by
 - determining, in a network apparatus, PUCCH format 1a/1b resources for HARQ-ACK for time division duplex signalling based on
 - an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe,
 - the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and
 - one or more configured parameters.
2. A method as claimed in claim 1, **characterized** by the one or more configured parameters comprising one or more of:
 - a first semi-static user terminal-specific resource starting offset defined for an EPDCCH set,
 - a second user terminal-specific resource offset defined for each EPDCCH set,
 - a dynamic offset modifier.
3. A method as claimed in claim 1 or 2, **characterized** in that a multi-subframe PUCCH format 1a/1b resource allocation is carried out for HARQ-ACK corresponding to PDSCH scheduled via EPDCCH.
4. A method as claimed in any of claims 1 to 3, **characterized** in that when $M=1$, the resource determination is independent of the second user terminal-specific resource offset.
5. A method as claimed in any of claims 1 to 4, **characterized** in that for time division duplex signalling when $M>1$, the second user terminal-specific resource offset impacts resource allocation when PUCCH HARQ-ACK resources for multiple downlink subframes map into a single uplink subframe.
6. A method as claimed in any of claims 1 to 5, **characterized** in that the offset for each EPDCCH set applied in each downlink subframe is dependent on the first semi-static user terminal-specific resource starting offset, second user terminal-specific resource offset, and m , where $m(0..M-1)$ is a relative index of the downlink subframe, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback.
7. A method as claimed in any of claims 1 to 6, **characterized** in that the dynamic offset modifier k is dependent on an antenna port or a power control

command.

8. A method as claimed in any of claims 1 to 7, **characterized** in that the dynamic offset modifier is applied such that it is independent on a subframe index m , wherein the dynamic offset modifier is derived based on downlink control information DCI that EPDCCH is carrying.

9. A method as claimed in any of claims 1 to 8, **characterized** in that a dynamic offset modifier is applied such that the dynamic offset modifier depends on a subframe index m , wherein multiple sets of dynamic offset modifiers are defined to be a matrix C with $(M-1)$ columns and N rows, N corresponding to the number of options to perform dynamic switching, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback, and the subframe index m is used as one factor to determine the value of the dynamic offset modifier $k(n, m)$, where n is an index of dynamic switching option signalled as downlink control information DCI via EPDCCH.

10. A method as claimed in claim 9, **characterized** in that the resource index of the ACK/NACK resource corresponding to the m -th subframe X_m is derived from the resource index of the first subframe X_0 as $X_0 + C(m)$, where $C(m)$ is a predefined constant number.

11. A method as claimed in claim 10, **characterized** in that the matrix C is configured via a protocol layer higher than the physical layer.

12. A method as claimed in any of claims 1 to 11, **characterized** in that the dynamic offset modifier k is an antenna port-specific offset associated with antenna port p , where p is the antenna port allocated to the first control channel element CCE of corresponding EPDCCH or other explicitly signalled or implicitly derived parameter.

13. A method as claimed in any of claims 1 to 12, **characterized** by scheduling the PUCCH format 1a/1b resources for EPDCCH for time division duplex signalling based on formula I:

$$(III) \quad n_{PUCCH}^{(1)} = N_{UE-PUCCH-TDD}^{(1)} * m + n_{eCCE} + N_{UE-PUCCH}^{(1)} + k,$$

where

$n_{PUCCH}^{(1)}$ is a PUCCH format 1a/1b resource to be allocated for a HARQ-ACK signal;

$N_{UE-PUCCH}^{(1)}$ is the first semi-static user terminal-specific resource starting offset defined for an EPDCCH set;

$N_{\text{UE-PUCCH-TDD}}^{(1)}$ is the second user terminal-specific resource offset defined for EPDCCH sets when $M > 1$, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback, m being a relative index of a downlink subframe, wherein $0 \leq m \leq M-1$;

5 n_{eCCE} is an index of the first enhanced control channel element eCCE used for transmission of a corresponding EPDCCH downlink assignment in a downlink subframe $n - k_m$, where m is the relative index of the downlink subframes and $0 \leq m \leq M-1$;

k is a dynamic offset modifier.

10 14. An apparatus comprising at least one processor; and at least one memory including a computer program code, **characterized** in that the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to

15 determine PUCCH format 1a/1b resources for HARQ-ACK for time division duplex signalling based on

an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe,

the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and

20 one or more configured parameters.

15. An apparatus as claimed in claim 14, **characterized** in that the one or more configured parameters comprise one or more of:

- a first semi-static user terminal-specific resource starting offset defined for an EPDCCH set,
- 25 - a second user terminal-specific resource offset defined for each EPDCCH set,
- a dynamic offset modifier.

16. An apparatus as claimed in claim 14 or 15, **characterized** in that the at least one memory and the computer program code are configured to, with
30 the at least one processor, cause the apparatus to carry out a multi-subframe PUCCH format 1a/1b resource allocation for HARQ-ACK corresponding to PDSCH scheduled via EPDCCH.

17. An apparatus as claimed in any of claims 14 to 16, **characterized** in that when $M=1$, the resource determination is independent of the second
35 user terminal-specific resource offset.

18. An apparatus as claimed in any of claims 14 to 17, **characterized**

ized in that for time division duplex signalling when $M > 1$, the second user terminal-specific resource offset impacts resource allocation when PUCCH HARQ-ACK resources for multiple downlink subframes map into a single uplink subframe.

19. An apparatus as claimed in any of claims 14 to 18, **character-**
 5 **ized** in that the offset for each EPDCCH set applied in each downlink subframe is dependent on the first semi-static user terminal-specific resource starting offset, second user terminal-specific resource offset, and m , where $m(0 \dots M-1)$ is a relative index of the downlink subframe, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback.

20. An apparatus as claimed in any of claims 14 to 19, **character-**
 10 **ized** in that the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to apply the dynamic offset modifier k dependent on an antenna port or a power control command.

21. An apparatus as claimed in any of claims 14 to 20, **character-**
 15 **ized** in that the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to apply the dynamic offset modifier such that it is independent on a subframe index m , wherein the dynamic offset modifier is derived based on downlink control information DCI that EPDCCH is carrying.

22. An apparatus as claimed in any of claims 14 to 21, **character-**
 20 **ized** in that the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to apply the dynamic offset modifier such that the dynamic offset modifier depends on a subframe index m , wherein multiple sets of dynamic offset modifiers are defined to be a matrix C with $(M-1)$ columns and N rows, N corresponding to the number of options to perform dynamic switching, M being the number of downlink subframes associated with an uplink subframe for HARQ-ACK feedback, and the subframe index m is used as one factor to determine the value of the dynamic offset modifier $k(n, m)$, where n is an index of dynamic switching option.

23. An apparatus as claimed in claim 22, **characterized** in that the resource index of the ACK/NACK resource corresponding to the m -th subframe X_m is derived from the resource index of the first subframe X_0 as $X_0 + C(m)$, where $C(m)$ is a predefined constant number.

24. An apparatus as claimed in claim 23, **characterized** in that the
 35 at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to define the matrix C via a protocol layer

higher than the physical layer.

25. An apparatus as claimed in any of claims 14 to 24, **characterized** in that the dynamic offset modifier k is an antenna port-specific offset associated with antenna port p , where p is the antenna port allocated to the first control
5 channel element CCE of corresponding EPDCCH or other explicitly signaled or implicitly derived parameter.

26. An apparatus as claimed in any of claims 14 to 25, **characterized** in that the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to set the parameter
10 $N_{\text{UE-PUCCH-TDD}}^{(1)}$ as

the number of PUCCH resources corresponding to a first EPDCCH set +
the number of PUCCH resources corresponding to a second EPDCCH set; or
the number of eCCEs in the first EPDCCH set + the number of eCCEs in
the second EPDCCH set.

27. An apparatus as claimed in any of claims 14 to 26, **characterized** in that the at least one memory and the computer program code are configured to, with the at least one processor, cause the apparatus to schedule the PUCCH
15 format 1a/1b resources for EPDCCH for time division duplex signalling based on formula I:

20

$$(IV) \quad n_{\text{PUCCH}}^{(1)} = N_{\text{UE-PUCCH-TDD}}^{(1)} * m + n_{\text{eCCE}} + N_{\text{UE-PUCCH}}^{(1)} + k,$$

where

$n_{\text{PUCCH}}^{(1)}$ is a PUCCH format 1a/1b resource to be allocated for a HARQ-
25 ACK signal;

$N_{\text{UE-PUCCH}}^{(1)}$ is the first semi-static user terminal-specific resource starting
offset defined for an EPDCCH set;

$N_{\text{UE-PUCCH-TDD}}^{(1)}$ is the second user terminal-specific resource offset defined
for EPDCCH sets when $M > 1$, M being the number of downlink subframes associated
30 with an uplink subframe for HARQ-ACK feedback, m being a relative index of a
downlink subframe, wherein $0 \leq m \leq M-1$;

n_{eCCE} is an index of the first enhanced control channel element eCCE
used for transmission of a corresponding EPDCCH downlink assignment in a
downlink subframe $n - k_m$, where m is the relative index of the downlink subframes
35 and $0 \leq m \leq M-1$;

k is a dynamic offset modifier.

28. A user terminal comprising at least one processor; and at least one memory including a computer program code, **characterized** in that the at least one memory and the computer program code are configured to, with the at least one processor, cause the user terminal to
- 5 apply PUCCH format 1a/1b resource mapping for EPDCCH scheduled PDSCH for time division duplex signalling based on
- an index of the first enhanced control channel element used for transmission of a corresponding EPDCCH downlink assignment in an uplink subframe,
- 10 the index of the downlink subframe in which the EPDCCH downlink assignment is transmitted, and
- one or more configured parameters.

29. A user terminal as claimed in claim 28, **characterized** by the one or more configured parameters comprising one or more of:

- 15 - a first semi-static user terminal-specific resource starting offset defined for an EPDCCH set,
- a second user terminal-specific resource offset defined for each EPDCCH set,
- a dynamic offset modifier.

- 20 30. A computer program product, **characterized** by comprising program code means configured to perform any of method steps of claims 1 to 13 when the program is run on a computer.

31. A computer-readable storage medium, **characterized** by comprising program code means configured to perform any of method steps of claims
- 25 1 to 13 when executed on a computer.

1/5

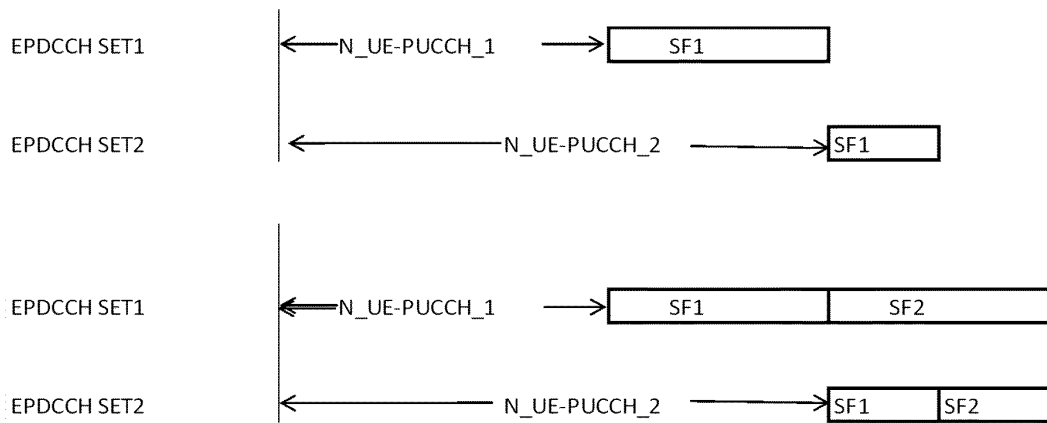


Fig. 1

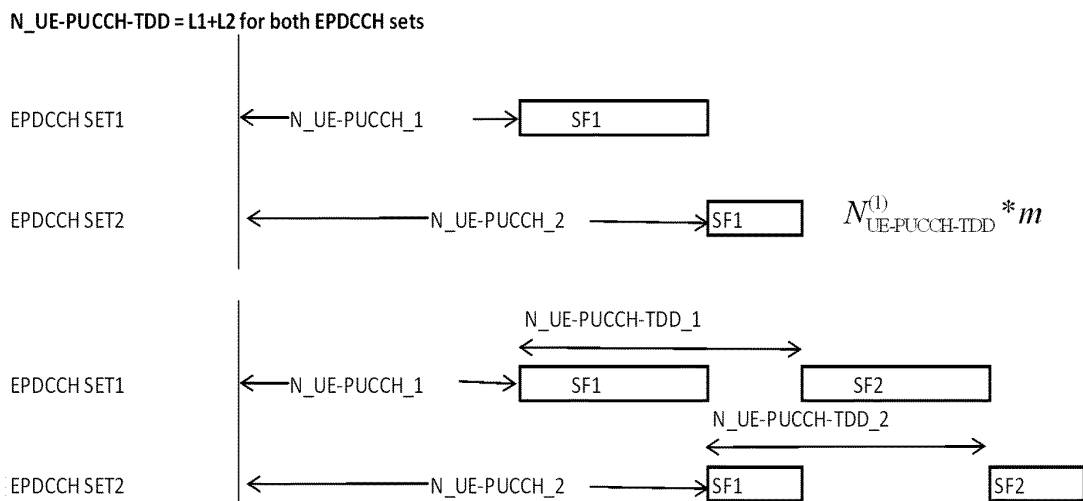


Fig. 2

2/5

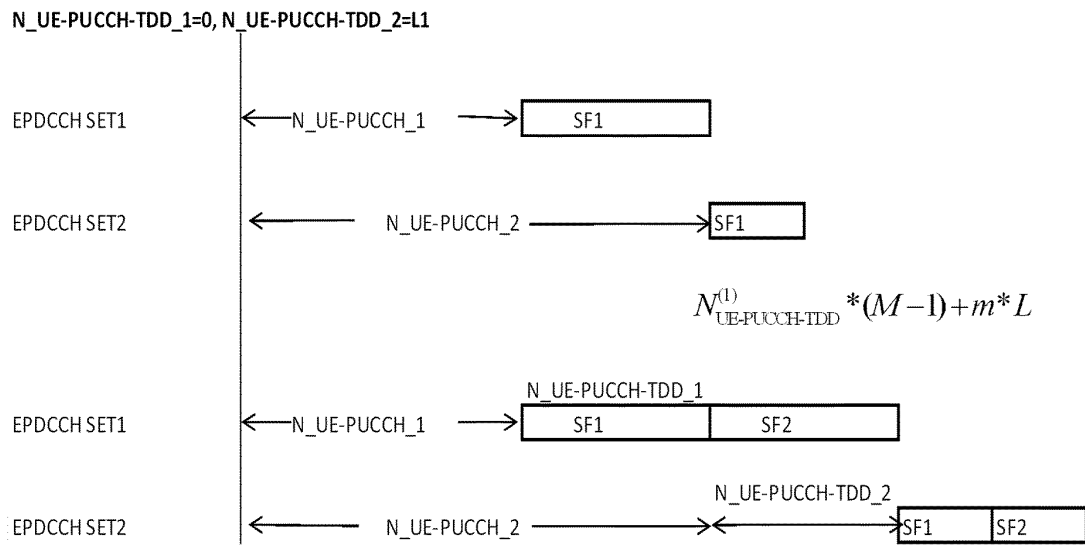


Fig. 3

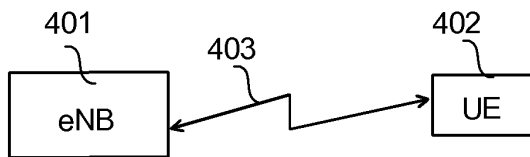


Fig. 4

n

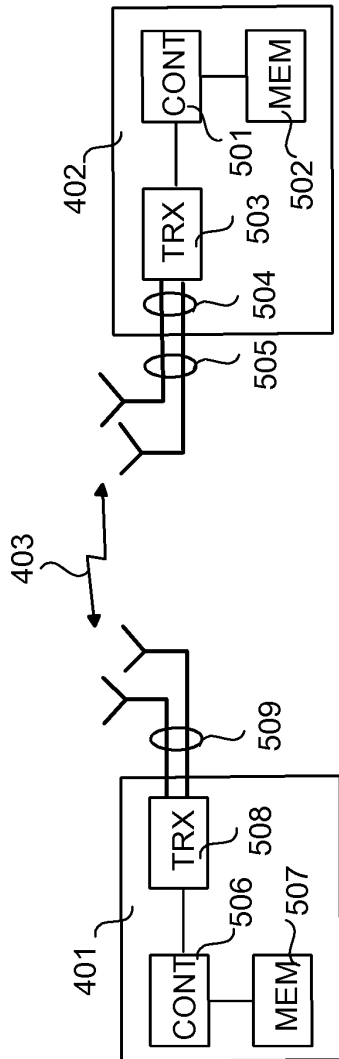
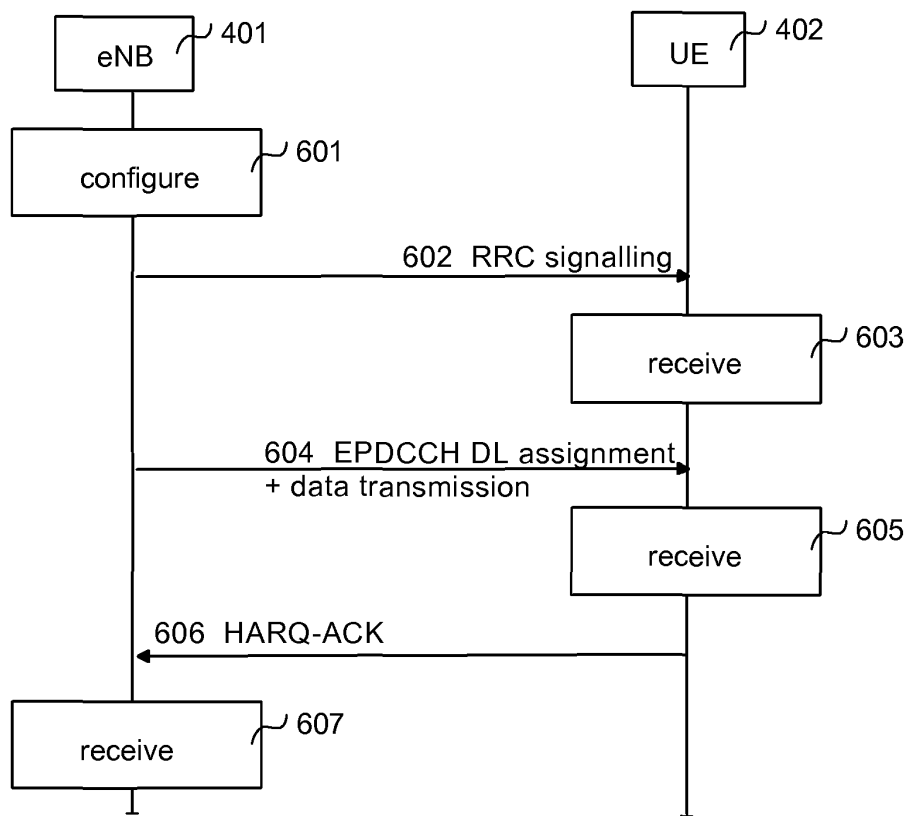


Fig. 5

4/5

*Fig. 6*

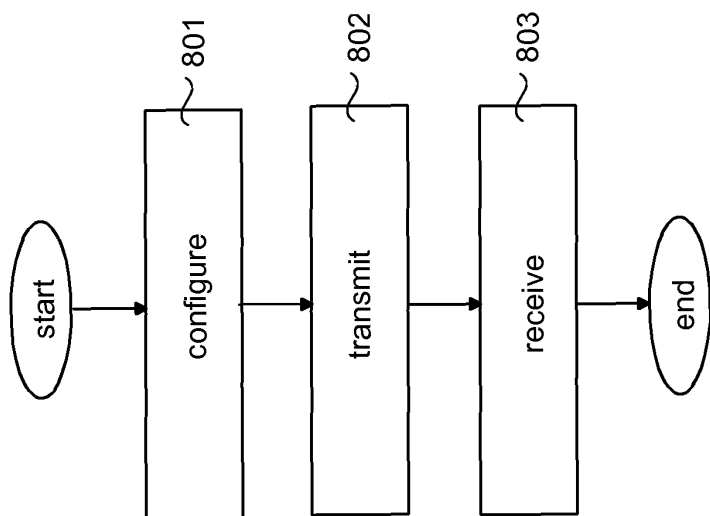


Fig. 8

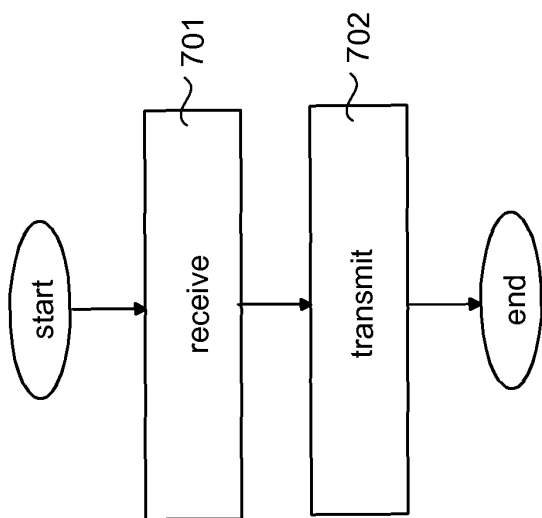


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/069193

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04L5/00 H04L1/18

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CATT: "PUCCH resource for E-PDCCH", 3GPP DRAFT; R1-123227, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , 5 August 2012 (2012-08-05), XP050661119, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL 1/TSGR1_70/Docs/ [retrieved on 2012-08-05]	1-8, 12-21, 25-31
A	the whole document ----- -/--	9-11, 22-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 June 2013

Date of mailing of the international search report

24/06/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gavin Alarcon, Oscar

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/069193

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	INTEL CORPORATION: "PUCCH resource allocation for ePDCCH", 3GPP DRAFT; R1-123167 INTEL_PUCCH_RA_EPDCCH, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Qingdao, China; 20120813 - 20120817 5 August 2012 (2012-08-05), XP050661059, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL1/TSGR1_70/Docs/ [retrieved on 2012-08-05] the whole document	1,14,20, 28,31
X	----- RESEARCH IN MOTION ET AL: "PUCCH Resource Efficiency for E-PDCCH", 3GPP DRAFT; R1-123623 RIM PUCCH RESOURCE EFFICIENCY FOR EPDCCH, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Qingdao; 20120813 - 20120817 5 August 2012 (2012-08-05), XP050661499, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL1/TSGR1_70/Docs/ [retrieved on 2012-08-05] the whole document	1,14,20, 28,31
A	----- PANASONIC (OFFLINE MODERATOR): "Outcome of the discussion for PUCCH resource of format 1a/1b for EPDCCH", 3GPP DRAFT; R1-123984 PUCCH OFFLINE NOTE, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG2, no. Qingdao, China; 20120813 - 20120817 17 August 2012 (2012-08-17), XP050661829, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL1/TSGR1_70/Docs/ [retrieved on 2012-08-17] the whole document ----- -/--	1-31

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/069193

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	"3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures (Release 11)", 3GPP STANDARD; 3GPP TS 36.213, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. V11.0.0, 18 September 2012 (2012-09-18), pages 1-143, XP050649202, [retrieved on 2012-09-18] Section 10.1.3 and 10.1.3.1 -----	1-31