

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number
WO 2005/089293 A2

(51) International Patent Classification: **Not classified**

(21) International Application Number:
PCT/US2005/008489

(22) International Filing Date: 15 March 2005 (15.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/553,318 15 March 2004 (15.03.2004) US
60/553,111 15 March 2004 (15.03.2004) US
60/558,400 31 March 2004 (31.03.2004) US
60/558,449 31 March 2004 (31.03.2004) US
60/586,939 8 July 2004 (08.07.2004) US
60/588,090 15 July 2004 (15.07.2004) US
60/608,847 10 September 2004 (10.09.2004) US

(71) Applicant (for all designated States except US): **COLOR KINETICS INCORPORATED** [US/US]; 10 Milk Street, Suite 1100, Boston, MA 02108 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **LYS, Ihor, A.**

[US/US]; 1221 Canton Avenue, Milton, MA 02186 (US). **MUELLER, George, G.** [US/US]; 234 Hanover Street #3, Boston, MA 02113 (US). **MORGAN, Frederick, M.** [US/US]; 157 Butler Road, Quincy, MA 02169 (US). **DOWLING, Kevin, J.** [US/US]; 23 Village View Road, Westford, MA 01886 (US). **NORTRUP, Edward** [US/US]; 73 Robin Hood Road, Stoneham, MA 02180 (US). **CELLA, Charles, H.** [US/US]; 34 Old West Elm Street, Pembroke, MA 02359 (US). **CHEMEL, Brian** [US/US]; 24 Thompson Road, Marblehead, MA 01945 (US). **PIEPGRAS, Colin** [US/US]; 998 Humphrey Road, Swampscott, MA 01907 (US). **MCCORMICK, Kevin** [US/US]; 1525 Cambridge Street, Cambridge, MA 02139 (US). **ROBERGE, Brian** [US/US]; 4 Tam Shanter Road, Franklin, MA 02038 (US). **BLACKWELL, Michael, K.** [US/US]; 357 Blue Hills Parkway, Milton, MA 02186 (US). **GRUESZ, Carl** [US/US]; 37 Sewall Street, Somerville, MA 02145 (US). **RAFFERTY, Chris** [US/US]; 175 W. Emerson Street, Melrose, MA 02176 (US).

(74) Agent: **TEJA, Joseph, Jr.**; Lowrie, Lando & Anastasi, LLP, One Main Street, Cambridge, MA 02142 (US).

[Continued on next page]

(54) Title: METHODS AND SYSTEMS FOR PROVIDING LIGHTING SYSTEMS

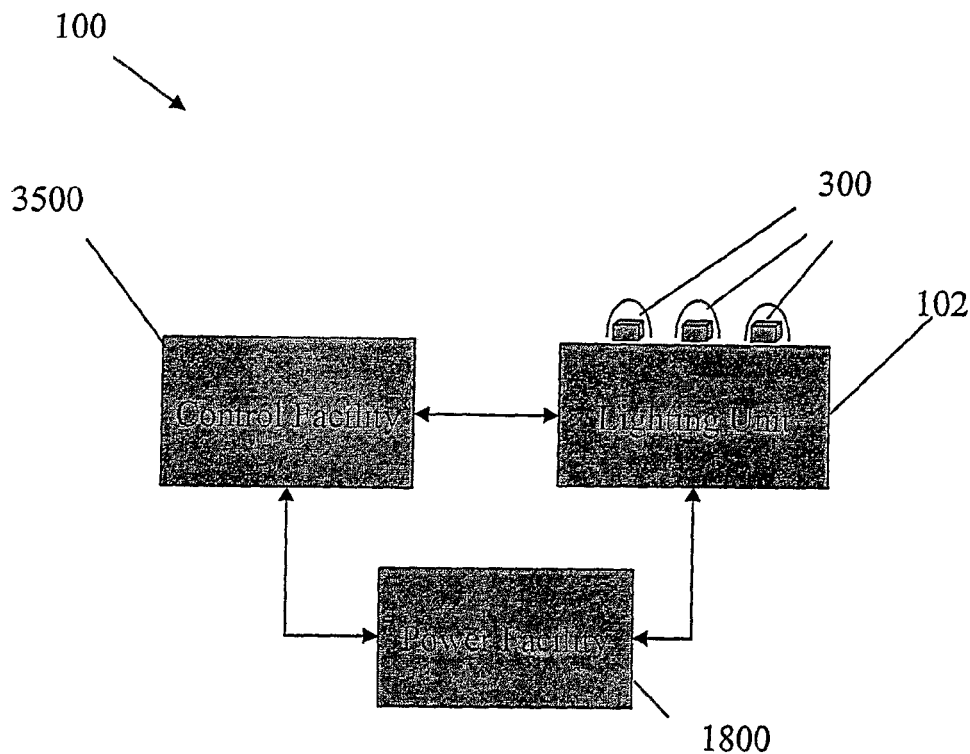

(57) Abstract: Methods and systems are provided for lighting systems, including high output linear lighting systems for various environments. The linear lighting systems may include power systems for driving light sources in high-voltage environments.



(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHODS AND SYSTEMS FOR PROVIDING LIGHTING SYSTEMS

Background

LED lighting systems are known that provide illumination and direct view effects. A need exists for improved components for such lighting systems and for improved methods and systems for powering, making, addressing, cooling, and controlling such lighting systems. A need also exists for improved systems that take advantage of LED lighting systems.

Summary

The methods disclosed herein include a method of determining an identifier of a networked lighting device among a group of networked lighting devices, the method including providing a plurality of lighting devices with multiple bit binary identifiers, the plurality of lighting devices arranged in a network, delivering a plurality of signals to the lighting devices, observing a condition of the network in response to each one of the plurality of signals, and inferring an identifier of at least one of the plurality of lighting devices based on the condition of the network.

The method may include mapping the identifier to the at least one of the plurality of lighting devices. The condition may include an indication of power drawn by the plurality of lighting devices in the network. The condition may include an exceptional condition of the network. The exceptional condition may include a short in a data communication path to at least one of the plurality of lighting devices. The exceptional condition may include a short in a data communication path to a lighting unit associated with at least one of the plurality of lighting devices. The condition may include a lighting condition of at least one of the plurality of lighting devices in the network. The condition may include a time required for a networked lighting device to respond to a signal on the network.

In the method, the plurality of signals may be delivered according to a binary tree search algorithm. The plurality of lighting devices may include at least one string of lighting units. A determination algorithm may be used to determine a location of the at least one string of lighting units. A determination algorithm may be used to determine a

-2-

number of nodes on the at least one string of lighting units. A determination algorithm may vary power to the at least one string of lighting units and monitor responsive behavior of the at least one string of lighting units. A determination algorithm may include a binary search tree algorithm.

5

In another aspect, a system disclosed herein may include a plurality of lighting devices with multiple bit binary identifiers, the plurality of lighting devices arranged in a network; and a controller adapted to determine an identifier for at least one of the plurality of lighting devices by delivering a plurality of signals to the plurality of lighting
10 devices, observing a condition of the network in response to each one of the plurality of signals, and inferring the identifier of the at least one of the plurality of lighting devices based on the condition of the network.

In the system, the identifier may be mapped to the at least one of the plurality of
15 lighting devices. The condition may include an indication of power drawn by the plurality of lighting devices in the network. The condition may include an exceptional condition of the network. The exceptional condition may include a short in a data communication path to at least one of the plurality of lighting devices. The exceptional condition may include a short in a data communication path to a lighting unit associated
20 with at least one of the plurality of lighting devices. The condition may include a lighting condition of at least one of the plurality of lighting devices in the network. The condition may include a time required for a networked lighting device to respond to a signal on the network.

25 In the system, the plurality of signals may be delivered according to a binary tree search algorithm. The plurality of lighting devices may include at least one string of lighting units. A determination algorithm may be used to determine a location of the at least one string of lighting units. A determination algorithm may be used to determine a number of nodes on the at least one string of lighting units. A determination algorithm
30 may vary power to the at least one string of lighting units and monitor responsive

-3-

behavior of the at least one string of lighting units. A determination algorithm may include a binary search tree algorithm.

5 In another aspect, a method disclosed herein includes providing a housing, the housing being substantially linear and including a first end, a second end, and a slot for receiving an array of a plurality of LED light sources; disposing the array of LED light sources on a circuit board within the slot; running an interior power/data feed from the first end to the second end; disposing at least one connector within at least one of the first end and the second end, the at least one connector adapted to connect the lighting unit to
10 a similar lighting unit while allowing the two lighting units to be placed end to end without spacing therebetween; and providing a thermal facility for removing heat from a proximity of one or more of the plurality of LED light sources.

In the method, the lens may include an optical facility for operating on the light
15 from the plurality of LED light sources. The optical facility may include a phosphor for shifting a wavelength of light emitted from one or more of the plurality of LEDs. The thermal facility may include an interior cavity of the lighting unit for moving air within the housing. The thermal facility may include a vent for releasing air from an interior of the housing to an exterior of the housing, at least one fin for radiating heat from the
20 housing, a heat-conducting mass integral to the housing, a potting facility for receiving heat from the circuit board, a metal plate, or other thermal facility. The plurality of LEDs may include high-brightness LEDs.

In the method, a lens may be provided in a slot above the plurality of LED light
25 sources wherein a profile of the lens may be co-planar with a top of the housing. The lens may be sealed to prevent a user from accessing the plurality of LEDs. The lens may be sealed to prevent a user from accessing a drive circuit on the circuit board. A power facility may be provided for the plurality of LED light sources. The power facility may include a high-voltage power facility, a power-factor-corrected power facility, an on-
30 board power facility, an inductively controlled power facility, a feed-forward power facility, a power/data power facility, or other power facility. The lighting unit may be a

-4-

networked lighting unit. The lighting unit may be addressed using a serial addressing protocol. The lighting unit may be an addressable lighting unit. The lighting unit may be addressed using a determination algorithm.

5 In another aspect, a system disclosed herein includes a housing, the housing being substantially linear and including a slot for receiving an array of a plurality of LED light sources, the array disposed on a circuit board within the housing; an interior power/data feed from a first end of the housing to a second end of the housing; at least one connector within at least one of the first end and the second end adapted to connect
10 the lighting unit to a similar lighting unit while allowing the two lighting units to be placed end to end without spacing therebetween; and a thermal facility for removing heat from a proximity of the plurality of LED light sources.

 In the system, the lens may include an optical facility for operating on the light
15 from the plurality of LED light sources. The optical facility may include a phosphor for shifting a wavelength of light emitted from one or more of the plurality of LEDs. The thermal facility may include an interior cavity of the lighting unit for moving air within the housing. The thermal facility may include a vent for releasing air from an interior of the housing to an exterior of the housing, at least one fin for radiating heat from the
20 housing, a heat-conducting mass integral to the housing, a potting facility for receiving heat from the circuit board, a metal plate, or other thermal facility. The plurality of LEDs may include high-brightness LEDs.

 In the system, a lens may be provided in a slot above the plurality of LED light
25 sources wherein a profile of the lens may be co-planar with a top of the housing. The lens may be sealed to prevent a user from accessing the plurality of LEDs. The lens may be sealed to prevent a user from accessing a drive circuit on the circuit board. A power facility may be provided for the plurality of LED light sources. The power facility may include a high-voltage power facility, a power-factor-corrected power facility, an on-
30 board power facility, an inductively controlled power facility, a feed-forward power facility, a power/data power facility, or other power facility. The lighting unit may be a

-5-

networked lighting unit. The lighting unit may be addressed using a serial addressing protocol. The lighting unit may be an addressable lighting unit. The lighting unit may be addressed using a determination algorithm.

5 In another aspect, a method or system disclosed herein includes providing an LED-based lighting unit, providing a housing configured in the shape of an MR-type halogen lamp; providing an MR-type connector for connecting the housing to a power source; disposing a plurality of LEDs in the housing; and providing a thermal facility for removing heat from a proximity of one or more of the plurality of LEDs, and/or systems
10 for performing related steps.

 In the system or method, the housing may be constructed from two cast halves or may be a single cast unit. The thermal facility may include a heat-conducting mass that is integral to the housing. The thermal facility may include a vent for allowing air to
15 circulate from the housing, an internal power and data connection for the plurality of LEDs, a heat shield that protects one or more of the plurality of LEDs from heat generated by power/data circuitry within the housing, a potting facility for trapping heat away from one or more of the plurality of LEDs, a metal core board for accepting heat from one or more of the plurality of LEDs, or other thermal facility. The metal core
20 board may be a printed circuit board. The plurality of LEDs may include at least one heat resistant LED.

 In the system or method, a lens associated with the system or method may include an optical facility in a position to operate on light emitted from one or more of
25 the plurality of LEDs. The lens may include a screw-type cap wherein a gap may separate the lens from the one or more of the plurality of LEDs. The lens may include a coating to prevent reflection of radiation back to the plurality of LEDs. The coating may reduce heat within the housing. The lens may protect one or more of the plurality of LEDs. The lens may prevent a user from touching one or more of the plurality of LEDs.
30 The lens may prevent a user from touching one or more electronic components within the housing.

-6-

In another aspect, a method disclosed herein includes providing a housing, the housing being substantially linear and including a slot for receiving an array of a plurality of LED light sources, wherein the plurality of LED light sources are capable of
5 producing substantially white light; disposing the array on a circuit board within the housing; running an interior power/data feed from a first end of the housing to a second end of the housing; disposing at least one connector within at least of the first end and the second end, the at least one connector adapted to connect the lighting unit to a similar lighting unit while allowing the two lighting units to be placed end to end without
10 spacing therebetween; and providing a thermal facility for removing heat from a proximity of the plurality of LED light sources.

In the method, the plurality of LED light sources may include one or more red LEDs, one or more green LEDs, one or more blue LEDs, and one or more white LEDs.
15 The plurality of LED light sources may include at least two white LEDs that emit different color temperatures of white light. The plurality of LED light sources may include one or more blue LEDs that include a phosphor. The plurality of LED light sources may include at least one white LED and at least one amber LED. The plurality of LED light sources may include one or more ultraviolet LEDs and one or more
20 phosphors. The lens may include an optical facility for operating on light emitted from the plurality of LED light sources. The optical facility may include a phosphor for shifting a wavelength of light from one or more of the plurality of LEDs. The thermal facility may include an interior cavity of the housing for moving air within the housing, a vent for releasing air from an interior of the housing to an exterior of the housing, one or
25 more fins for radiating heat from the housing, a heat-conducting mass integral to the housing, a potting facility for receiving heat from the circuit board, a metal plate or other thermal facility. The plurality of LEDs may include at least one high-brightness LED.

In the method, a lens may be disposed in a slot above the array wherein a profile
30 of the lens may be co-planar with a top of the housing. The lens may be sealed to prevent a user from accessing the plurality of LEDs. A power facility may provide

-7-

power to the plurality of LEDs. The power facility includes a high-voltage power facility, a power-factor-corrected power facility, an on-board power facility, an inductively controlled power facility, a feed-forward power facility, a power/data power facility, or other power facility. The lighting unit may be a networked lighting unit. The lighting unit may be addressed using a serial addressing protocol. The lighting unit may be an addressable lighting unit. The lighting unit may be addressed using a determination algorithm.

In another aspect, a system disclosed herein includes providing a housing, the housing being substantially linear and the housing including a slot for receiving an array of a plurality of LED light sources, the plurality of LED light sources capable of producing substantially white light, and the array disposed on a circuit board within the housing; an interior power/data feed from a first end of the housing to a second end of the housing; at least one connector within at least one of the first end and the second end adapted to connect the lighting unit to a similar lighting unit while allowing the two lighting units to be placed end to end without spacing therebetween; and a thermal facility for removing heat from a proximity of the plurality of LED light sources.

In the system, the plurality of LED light sources may include one or more red LEDs, one or more green LEDs, one or more blue LEDs, and one or more white LEDs. The plurality of LED light sources may include at least two white LEDs that emit different color temperatures of white light. The plurality of LED light sources may include one or more blue LEDs that include a phosphor. The plurality of LED light sources may include at least one white LED and at least one amber LED. The plurality of LED light sources may include one or more ultraviolet LEDs and one or more phosphors. The lens may include an optical facility for operating on light emitted from the plurality of LED light sources. The optical facility may include a phosphor for shifting a wavelength of light from one or more of the plurality of LEDs. The thermal facility may include an interior cavity of the housing for moving air within the housing, a vent for releasing air from an interior of the housing to an exterior of the housing, one or more fins for radiating heat from the housing, a heat-conducting mass integral to the

-8-

housing, a potting facility for receiving heat from the circuit board, a metal plate or other thermal facility. The plurality of LEDs may include at least one high-brightness LED.

5 In the system, a lens may be disposed in a slot above the array wherein a profile of the lens may be co-planar with a top of the housing. The lens may be sealed to prevent a user from accessing the plurality of LEDs. A power facility may provide power to the plurality of LEDs. The power facility includes a high-voltage power facility, a power-factor-corrected power facility, an on-board power facility, an inductively controlled power facility, a feed-forward power facility, a power/data power
10 facility, or other power facility. The lighting unit may be a networked lighting unit. The lighting unit may be addressed using a serial addressing protocol. The lighting unit may be an addressable lighting unit. The lighting unit may be addressed using a determination algorithm.

15 In one aspect, a method disclosed herein includes providing a circuit board; disposing a plurality of LEDs on the circuit board; and disposing a plurality of control facilities on the circuit board and connecting the plurality of control facilities in a series, each one of the control facilities controlling at least one of the plurality of LEDs, and each one of the control facilities being an addressable control facility that responds to
20 data according to a serial addressing protocol.

In this method, one of the control facilities in the series may respond to a first unmodified byte in a data stream, modifies the first unmodified byte to provide a modified data stream, and sends the modified data stream to a next control facility in the
25 series. Each one of the plurality of control facilities may be an application specific integrated circuit. Each one of the plurality of control facilities may control three LEDs. The three LEDs may be LEDs of three different colors. The three colors may be red, green and blue. The plurality of LEDs may substantially serve to illuminate a surrounding space or may be viewed directly.

30

-9-

In the method, the plurality of control facilities may be disposed in a rectangular array wherein the rectangular array may be a three-by-three array. The three-by-three array may have dimensions of about six inches by about six inches. The three-by-three array may have dimensions of about one foot by about one foot. The array may be a
5 four-by-four array, a five-by-five array, a six-by-six array, or other array. The six-by-six array may have dimensions of about six inches by about six inches. The six-by-six array may have dimensions of about one foot by about one foot. A plurality of substantially rectangular circuit boards may contain substantially rectangular arrays of control facilities in an array of such rectangular circuit boards. The array of such rectangular
10 circuit boards may be roughly spherical, roughly cylindrical, roughly semicylindrical, or other appropriate shape. A plurality of substantially triangular circuit boards may contain substantially triangular arrays of control facilities in an array of such triangular circuit boards. A protective lens may be for the circuit board. A lens may be fitted on the circuit board serving to shape the light coming from the LEDs. A diffuser may be
15 fitted on the circuit serving to diffuse the light coming from the LEDs.

In another aspect, a device disclosed herein includes providing a plurality of LEDs disposed on the circuit board; and a plurality of control facilities disposed on the circuit board and connected in a series, each one of the plurality of control facilities
20 being an addressable control facility adapted to control at least one of the plurality of LEDs and to respond to data according to a serial addressing protocol.

In this device, one of the control facilities in the series may respond to a first unmodified byte in a data stream, modifies the first unmodified byte to provide a
25 modified data stream, and sends the modified data stream to a next control facility in the series. Each one of the plurality of control facilities may be an application specific integrated circuit. Each one of the plurality of control facilities may control three LEDs. The three LEDs may be LEDs of three different colors. The three colors may be red, green and blue. The plurality of LEDs may substantially serve to illuminate a
30 surrounding space or may be viewed directly.

-10-

In this device, the plurality of control facilities may be disposed in a rectangular array wherein the rectangular array may be a three-by-three array. The three-by-three array may have dimensions of about six inches by about six inches. The three-by-three array may have dimensions of about one foot by about one foot. The array may be a
5 four-by-four array, a five-by-five array, a six-by-six array, or other array. The six-by-six array may have dimensions of about six inches by about six inches. The six-by-six array may have dimensions of about one foot by about one foot. A plurality of substantially rectangular circuit boards may contain substantially rectangular arrays of control facilities in an array of such rectangular circuit boards. The array of such rectangular
10 circuit boards may be roughly spherical, roughly cylindrical, roughly semicylindrical, or other appropriate shape. A plurality of substantially triangular circuit boards may contain substantially triangular arrays of control facilities in an array of such triangular circuit boards. A protective lens may be for the circuit board. A lens may be fitted on the circuit board serving to shape the light coming from the LEDs. A diffuser may be
15 fitted on the circuit serving to diffuse the light coming from the LEDs.

In one aspect, there is disclosed herein a circuit board for a lighting system, as well as methods for providing such a circuit board, on which may be disposed a plurality of LEDs and a series of addressable control facilities, each of which may control at least
20 one LED, wherein the control facility may respond to data according to an addressing protocol, which may be a serial protocol. A control facility in the series may respond to a first unmodified byte in a data stream; may modify that byte; and may send the modified data stream to the next control facility in the series. The control facility may be an application specific integrated circuit, which may control three LEDs. The control
25 facilities may be individually addressable.

The three LEDs may be of three different colors which may, without limitation, be red, green, and blue. The LEDs may substantially serve to illuminate a surrounding space. Or, they may substantially service to be viewed directly.

30

-11-

The circuit board may be supplied with an interface for providing a physical connection and a data connection to another circuit board. The physical connection may be without limitation an interlocking tab configuration; a magnet; or a connector such as a jack. The physical connection may provide for the circuit board to interlocked with
5 other such circuit boards to form an array. This interlocking may enable accurate and precise positioning of the LEDs, for example and without limitation by facilitating the production of a physical shape comprising a plurality of circuit boards. By individually addressing the addressable control facilities, it may be possible to create an appearance that differs from varying points of view.

10

In some embodiments, the circuit board may be triangular. Triangular circuit boards may be interlocked in such a manner as to create a substantially spherical configuration. This configuration may serve as a luminaire and may comprise without limitation narrow-angle LEDs; medium-angle LEDs; narrow- and medium-angle LEDs;
15 or linear-emitting LEDs. The LEDs may point radially outward from the center of the spherical configuration.

15

Triangular circuit boards may be interlocked in a substantially cylindrical configuration. This configuration may serve as a luminaire and may comprise linear-emitting LEDs wherein the LEDs may point radially outward. Triangular circuit boards
20 may be interlocked in a substantially a substantially semicylindrical configuration. This configuration may serve as a luminaire and may comprise linear-emitting LEDs wherein the LEDs may point inward, with the beams emitted by the LEDs crossing as they exit the half cylinder. Triangular circuit boards may be interlocked in an appreciably planar configuration. An edge of such an interlocking of triangular circuit boards may be
25 connected to another configuration of circuit boards. Generally, triangular circuit boards may be interlocked to create a geometrical configuration that is planar such as a tessellation, that is three-dimensional and open such as a parabolic dish, or that is three-dimensional and volume-enclosing such as a sphere. The configuration may be
30 connected on its surface or face to another such configuration.

25

30

-12-

In other embodiments, the circuit board may be rectangular. The control facilities may be disposed on a rectangular circuit board in a substantially rectangular array, which may without limitation be a three-by-three array; a four-by-four array; a five-by-five array; or a six-by-six array. In one embodiment, the array may have dimensions of about
5 six inches by six inches. In another embodiment, the array may have dimensions of about one foot by one foot. Still other embodiments may become apparent from the following detailed description. In any case, a plurality of such rectangular circuit boards may themselves be disposed in an array. This array may be roughly spherical, roughly cylindrical, roughly semicylindrical, and so forth.

10

Generally, the circuit board may comprise a feature that may allow for like circuit boards to be connected. This connection may be in the same plane, or different planes. The different planes may intersect at any angle, including but not limited to a right angle. The feature that may allow for like circuit boards to be connected may comprise a
15 magnetic facility, which may be disposed along the side of the circuit board; may provide a magnetic connection; may provide a power interface between the circuit board and another such circuit board; may provide a data interface between the circuit board and another such circuit board. The feature that may allow for like circuit boards to be connected may, alternately or additionally, comprise a fastening facility for allowing
20 circuit boards to be connected, which may without limitation comprise a ball and socket combination; an adhesive; a tape; an interlocking shape; an interlocking edge; a tab; or a solderable finger joint. The circuit board may comprise a dedicated input pad and a dedicated output pad.

25

The circuit board may further comprise a protective cover, which may include a space providing a viewer with direct viewing of one of the LEDs without having light pass through the cover. The cover may be a sealed cover that may provide for underwater operation of the circuit board. The sealed cover may comprise a sealed housing, which may be oil-filled with an oil that may be clear, may serve as a thermal facility, may serve
30 as an optical facility, may serve as both a thermal and optical facility, or may contain a

-13-

non-conductive particulate, which may service to diffuse the light coming from the LEDs.

5 The circuit board may still further comprise a lens fitted on the printed circuit board serving to shape the light coming from the LEDs. The lens may be interchangeable, such as a snap-in lense. Likewise, the circuit board may comprise a diffuser fitted on the circuit board serving to diffuse the light coming from the LEDs. The diffuser may be interchangeable, such as a snap-in diffuser

10 The circuit board may still yet further comprise a jack for taking in power and data from a source, such as and without limitation a central controller or another such circuit board. The circuit board may also comprise a jack for sending power and data out to a destination, such as and without limitation another such circuit board. The circuit board may still further comprise a Dipline-style mounting panel, which may allow the
15 circuit board to be placed anywhere on a surface. The circuit board may comprise an integrated hash mark or laser level for aligning the circuit board during installation and/or to facilitate accurate installation. A modular attached pin connector may providing contact between the circuit board and a selected conductive layer within a layered surface of conductors, such as a Dipline-style surface.

20

The circuit board may further comprise a sensor that is operatively coupled to the circuit board. The sensor may be disposed on the circuit board, coupled via a wire to the circuit board, or coupled via a wireless facility to the circuit board. The sensor may be without limitation a yaw sensor; a pitch sensor; a roll sensor; a two-axis sensor, wherein
25 the two axes may be selected from the group of yaw, pitch, roll; a three-axis sensor, such as a roll, pitch, yaw sensor; a global positioning system; an inclinometer; a gyroscope; a sensor thaqt functions as though it is a gyroscope; an inertial navigation sensor; a dead reckoning device; or a sensor that detects motion.

30 The circuit board may be operatively coupled to a plurality of other such circuit boards, thus forming an array of circuit boards. The array of circuit boards may be

-14-

attached to a wall with a mounting cleat, which may be disposed in proximity to a power supply; be disposed in proximity to a data supply; have an integrated electrical connection as well as power; comprise small ridges, which may provide electrical connection for both power and data, which may be shaped horizontally, or which may be shaped vertically.

The circuit board may further comprise an attachment to an electrical junction box, a thermally conductive gap pad to hold heat away from the LEDs, and/or an electrical rail. The electric rail may be a power rail or a data rail. A plurality of such rails may be provided in a grid format. The rail may serve as a track and the circuit board may snap into the track. The circuit board may further comprise providing live feedback during installation, such as and without limitation a blinking light or the emission of a particular color of light. The feedback may, without limitation be in relation to reaching a maximum number of units per power supply, the position of the circuit board with respect to another such circuit boards, or based upon a geometric orientation of the board. A sensor may measure the geometric orientation of the board.

A method disclosed herein includes providing a substantially flexible substrate; disposing a plurality of LEDs on the substrate; and providing a control facility on the substrate for controlling the plurality of LEDs.

In the method, the substrate may include a flexible band. A power facility may be provided for the plurality of LEDs. The power facility may include a high-voltage power facility, a power-factor-corrected power facility, an on-board power facility, an inductively controlled power facility, a feed-forward power facility, a power/data power facility, or other power facility. A thermal facility may be provided for the circuit board. The thermal facility may include a potting compound. The thermal facility may include an epoxy.

In another aspect, a method disclosed herein includes providing a plurality of circuit boards, each circuit board having disposed thereon a plurality of LEDs and a

-15-

control facility for controlling the plurality of LEDs; and providing a flexible connection between the circuit boards. The flexible connection may include an interlocking tab, a power/data connection, a data cable, a wire, or other connection type.

5 In another aspect, a lighting system disclosed herein includes a substantially flexible substrate; a plurality of LEDs on the substrate; and a control facility on the substrate for controlling the plurality of LEDs.

10 In the system, the substrate may include a flexible band. A power facility may be provided for the plurality of LEDs. The power facility may include a high-voltage power facility, a power-factor-corrected power facility, an on-board power facility, an inductively controlled power facility, a feed-forward power facility, a power/data power facility, or other power facility. A thermal facility may be provided for the circuit board. The thermal facility may include a potting compound. The thermal facility may include
15 an epoxy.

In another aspect, a flexible lighting system disclosed herein includes a plurality of circuit boards, each circuit board having disposed thereon a plurality of LEDs and a control facility for the plurality of LEDs; and a flexible connection between the circuit
20 boards. The flexible connection may include an interlocking tab, a power/data connection, a data cable, a wire, or other connection type.

In another aspect, a method disclosed herein includes providing a circuit board, disposing a plurality of LEDs on the circuit board, and attaching an optical facility to the
25 circuit board, the optical facility being an attachable optical facility.

In the method, the optical facility may include a lens. The lens may operate on light emitted from the plurality of LEDs. The optical facility may include a phosphor for shifting at least one wavelength of light emitted from the plurality of LEDs. The circuit
30 board may be rectangular and the plurality of LEDs may be arranged in an array. The array may be a three-by-three array. The array may have dimensions of about six inches

-16-

by about six inches. The array may have dimensions of about one foot by about one foot. The array may be a four-by-four array, a five-by-five array, a six-by-six array, or other array. The array may have dimensions of about six inches by about six inches. The array may have dimensions of about one foot by about one foot. The optical facility
5 may include a diffuser. The optical facility may be transparent. The optical facility may include a hinge for attaching to the circuit board.

In another aspect, a system for providing an optical facility for a lighting unit may include a circuit board; a plurality of LEDs disposed on the circuit board; and an
10 attachable optical facility for the circuit board.

In the system, the optical facility may include a lens. The lens may operate on light emitted from the plurality of LEDs. The optical facility may include a phosphor for shifting at least one wavelength of light emitted from the plurality of LEDs. The circuit
15 board may be rectangular and the plurality of LEDs are arranged in an array. The array may be a three-by-three array. The array may have dimensions of about six inches by about six inches. The array may have dimensions of about one foot by about one foot. The array may be a four-by-four array, a five-by-five array, a six-by-six array, or other array. The array may have dimensions of about six inches by about six inches. The
20 array may have dimensions of about one foot by about one foot. The optical facility may include a diffuser. The optical facility may be transparent. The optical facility may include a hinge for attaching to the circuit board.

In another aspect, a method disclosed herein includes providing a circuit board;
25 disposing a plurality of LEDs on the circuit board; configuring the circuit board to be disposed in proximity to other similarly configured circuit boards; and providing a magnetic connector for connecting the circuit board to an item.

In the method, the item may be a second circuit board. The circuit board and the
30 second circuit board may be magnetically connected and reside in substantially the same plane. The circuit board and the second circuit board may be magnetically connected

-17-

and may bend relative to each other in different planes while remaining in physical connection. A data interface may be provided for allowing the circuit board to connect in a communicating relationship to another circuit board. The data interface may include the magnetic connector. The data interface may transceive data, carry power, include a ball and socket combination, include an adhesive, include a tape, include one or more interlocking shapes, include a tab, and/or include a solderable finger joint. An electrical path may provide identification to the circuit board. The identification may be transmitted to a controller on the circuit board. The identification may be transmitted through input and output pins of the circuit board.

In another aspect, a system disclosed herein includes a circuit board, the circuit board adapted to be disposed in proximity to other similarly configured circuit boards and to form a communicating relationship therewith; a plurality of LEDs disposed on the circuit board; and a magnetic connector for connecting the circuit board to an item.

In the system, the item may be a second circuit board. The circuit board and the second circuit board may be magnetically connected and may reside in substantially the same plane. The circuit board and the second circuit board may be magnetically connected and may bend relative to each other in different planes while remaining in physical connection. The system may include a data interface for allowing the circuit board to connect in a communicating relationship to another circuit board. The data interface may include the magnetic connector. The data interface may transceive data, carry power, include a ball and socket combination, include an adhesive, include a tape, include one or more interlocking shapes, include a tab, and/or include a solderable finger joint. An electrical path may provide identification to the circuit board. The identification may be transmitted to a controller on the circuit board. The identification may be transmitted through input and output pins of the circuit board.

In methods and systems disclosed herein, a lighting unit is provided that is shaped to fit to a fluorescent lighting fixture, wherein a plurality of LEDs are disposed on the structure, the LEDs being configured to receive power from a power facility. A

-18-

fastening facility may be provided for connecting the structure to the fluorescent lighting fixture. The fastening facility may be without limitation a screw hole or a clip. The lighting unit may without limitation provide a thermal connection between the structure and the fluorescent lighting unit, may provide a data facility for delivering data to the
5 LEDs, and may associate a control facility with each of the LEDs.

In these methods and systems, the LEDs may be light sources, which may be configured to produce substantially white light and may include without limitation red, green, blue and white LEDs. The white LEDs may emit at different color temperatures of
10 white light, may include blue LEDs that include a phosphor, may include at least one white LED and at least one amber LED, and/or may include a UV LED and a phosphor. The structure may be configured to fit over a fluorescent lamp, and may be a bridge-type structure with a substantially rectangular plane supported by two substantially rectangular legs, which may include two substantially rectangular planes connected at
15 about a ninety-degree angle. In this configuration, the structure may be configured to fit between the ballasts that receive a fluorescent lamp, wherein the power facility may be configured to receive power from the ballasts that power the fluorescent lamp. In an alternate configuration, the structure may comprise three substantially rectangular sides, two of which may be substantially parallel to each other, the third of which may be
20 perpendicular to the first two and connects the first two. The lighting unit may comprise a power facility for the lighting unit, which may without limitation be a high-voltage power facility, a power-factor-corrected power facility, an on-board power facility, an inductively controlled power facility, a feed-forward power facility, or a power/data power facility. The lighting unit may be a networked lighting unit. The lighting unit
25 may further comprise a thermal facility for the lighting unit, wherein the thermal facility may without limitation be an interior cavity of the lighting unit for moving air within the housing, a vent for releasing air from the interior of the housing to the exterior of the housing, a fin for radiating heat from the housing, a heat-conducting mass that is part of the housing, a potting facility for receiving heat from the board, and/or a metal plate.

30

-19-

In certain embodiments, a method of providing a lighting unit disclosed herein includes providing a structure that is shaped to fit into an incandescent lighting fixture; and disposing a plurality of LEDs on the structure, the LEDs configured to receive power from a power facility.

5

The method may further include providing a fastening facility for connecting the structure to the incandescent lighting fixture. The fastening facility may include a screw hole. The fastening facility may include a clip. The method may further include providing a thermal connection. The method may further include providing a data

10 facility for delivering data to the plurality of LEDs. The method may further include associating a control facility with each one of the plurality of LEDs. The plurality of LEDs may be configured to produce substantially white light. The plurality of LEDs may include at least one red LED, at least one green LED, and least one blue LED, and at least one white LED. The plurality of LEDs may include at least two white LEDs that

15 emit light at different color temperatures of white light. The plurality of LEDs may include at least one blue LED that further includes a phosphor. The plurality of LEDs may include at least one white LED and at least one amber LED. The plurality of LEDs may include at least one ultraviolet LED, the ultraviolet LED including a phosphor.

20 The structure may be configured to fit over an incandescent light bulb. The structure may be a bridge-type structure with a substantially rectangular plane supported by two substantially rectangular legs. The structure may include two substantially rectangular planes connected at about a ninety degree angle. The structure may be a substantially cylindrical structure with a substantially circular top. The structure may

25 have three substantially rectangular sides, two of which are substantially parallel to each other, the third of which is perpendicular to the first two and connects the first two.

The power facility may include a high-voltage power facility, a power-factor-corrected power facility, an on-board power facility, an inductively controlled power

30 facility, a feed-forward power facility, and/or a power/data power facility. The lighting unit may be a networked lighting unit. The method may further include providing a

-20-

thermal facility for the lighting unit. The thermal facility may include a heat-conducting path for connecting the structure that supports the plurality of LEDs to the housing of the incandescent lighting fixture. The heat-conducting path may connect to a socket for an incandescent bulb. The heat-conducting path may include a flare shape that touches a housing of an incandescent lighting unit. The thermal facility may include an interior cavity of the structure for moving air within the structure, a vent for releasing air from an interior of the structure to an exterior of the structure, at least one fin for radiating heat from the structure, a heat-conducting mass integral to the structure, a potting facility for receiving heat from a circuit board associated with one or more of the plurality of LEDs, and/or a metal plate.

In another aspect, a lighting unit disclosed herein includes a structure shaped to fit to an incandescent lighting fixture; and a plurality of LEDs on the structure, the LEDs being adapted to receive power from a power facility.

The lighting unit may further include a fastening facility for connecting the structure to the incandescent lighting fixture. The fastening facility may include a screw hole. The fastening facility may include a clip. The lighting unit may further include a thermal connection. The lighting unit may further include a data facility for delivering data to the plurality of LEDs. The lighting unit may further include a control facility associated with each one of the plurality of LEDs. The plurality of LEDs may be configured to produce substantially white light. The plurality of LEDs may include at least one red LED, at least one green LED, and at least one blue LED, and at least one white LED. The plurality of LEDs may include at least two white LEDs that emit light at different color temperatures of white light. The plurality of LEDs may include at least one blue LED that further includes a phosphor. The plurality of LEDs may include at least one white LED and at least one amber LED. The plurality of LEDs may include at least one ultraviolet LED, the ultraviolet LED including a phosphor.

The structure may be configured to fit over an incandescent light bulb. The structure may be a bridge-type structure with a substantially rectangular plane supported

-21-

by two substantially rectangular legs. The structure may include two substantially rectangular planes connected at about a ninety degree angle. The structure may be a substantially cylindrical structure with a substantially circular top. The structure may have three substantially rectangular sides, two of which are substantially parallel to each other, the third of which is perpendicular to the first two and connects the first two.

The power facility may include a high-voltage power facility, a power-factor-corrected power facility, an on-board power facility, an inductively controlled power facility, a feed-forward power facility, and/or a power/data power facility. The lighting unit may be a networked lighting unit. The lighting unit may further include a thermal facility for the lighting unit. The thermal facility may include a heat-conducting path for connecting the structure that supports the plurality of LEDs to the housing of the incandescent lighting fixture. The heat-conducting path may connect to a socket for an incandescent bulb. The heat-conducting path may include a flare shape that touches a housing of an incandescent lighting unit. The thermal facility may include an interior cavity of the structure for moving air within the structure, a vent for releasing air from an interior of the structure to an exterior of the structure, at least one fin for radiating heat from the structure, a heat-conducting mass integral to the structure, a potting facility for receiving heat from a circuit board associated with one or more of the plurality of LEDs, and/or a metal plate.

In one aspect, a device disclosed herein includes a housing configured to fit a lighting fixture, the lighting fixture being a conventional lighting fixture, and the housing shaped to cover a space where a conventional bulb would be located in the lighting fixture; a plurality of light sources associated with the housing, the plurality of light sources generating heat in response to activation; a thermal facility that dissipates heat from the plurality of light sources; and a fastener adapted to attach the housing to the lighting fixture.

The fastener may include at least one of a screw hole, a clip, or a tab. The fastener may provide a heat conduction path for the thermal facility. The device may

-22-

include a circuit board associated with one or more of the plurality of light sources. The thermal facility may include a heat-conducting plate associated with the circuit board. The housing may be cylindrical. The device may include a processor to control operation of the plurality of light sources. The plurality of light sources may include at least one LED. The plurality of light sources may be disposed on top of the housing. The light fixture may include at least one ballast. The light fixture may include a diffuser that diffuses light emitted from the plurality of light sources. The light sources may be arranged in one or more lines. The fixture may include a socket for at least one of an incandescent lamp or a halogen lamp. The device may include an optical facility. The optical facility may include a protective cover for at least one of the plurality of light sources and one or more electrical components associated with the plurality of light sources.

In another aspect, a method disclosed herein includes providing a housing configured to fit a lighting fixture, the lighting fixture being a conventional lighting fixture, and the housing shaped to cover a space where a conventional bulb would be located in the lighting fixture; associating a plurality of light sources with the housing, the plurality of light sources generating heat in response to activation; placing a thermal facility in thermally conductive association with the plurality of light sources to dissipate heat from the plurality of light sources when the plurality of light sources are activated; and providing a fastener adapted to attach the housing to the lighting fixture.

The fastener may include at least one of a screw hole, a clip, or a tab. The fastener may provide a heat conduction path for the thermal facility. The method may include mounting the plurality of light sources on a circuit board. The thermal facility may include a heat-conducting plate associated with the circuit board. The housing may be cylindrical. The method may include controlling operation of the plurality of light sources with a processor. The plurality of light sources may include at least one LED. The plurality of light sources may be disposed on top of the housing. The light fixture may include at least one ballast. The method may include diffusing light emitted from the plurality of light sources. The method may include arranging the light sources in one

-23-

or more lines. The fixture may include a socket for at least one of an incandescent lamp or a halogen lamp. The method may include associating an optical facility with the light sources. The optical facility may include a protective cover for at least one of the plurality of light sources and one or more electrical components associated with the plurality of light sources.

In another aspect, a method of providing a lighting structure as disclosed herein includes providing a structural element for bearing a plurality of LEDs; and providing a control facility for controlling the LEDs, wherein the structural element is configured to fit with other structural elements into the lighting structure.

In the method, the structural element may be designed to allow tessellation of multiple structural elements. The structural element may be designed to allow tiling of structural elements filling a portion of a two-dimensional plane. The structural element may be a triangle. The structural element may be an icosahedron. The structural element may be a six-sided element. The structural element may be designed to facilitate construction of a spherical lighting structure. The structural element may be designed to facilitate construction of a two-dimensional lighting structure. The structural element may include a power facility. The power facility may be a high-voltage power facility. The power facility may be a power-factor-corrected power facility. The power facility may be an on-board power facility. The power facility may be an inductively controlled power facility. The power facility may be a feed-forward power facility. The power facility may be a power/data power facility. The structural element may be a networked lighting unit. The structural element may be addressed using a serial addressing protocol. The structural element may be designed to facilitate construction of a rectangular solid lighting structure.

In another aspect, a system for a lighting structure as disclosed herein may include: a structural element for bearing a plurality of LEDs; and a control facility for controlling the LEDs, wherein the structural element is configured to fit with other structural elements into the lighting structure.

-24-

In the system, the structural element may be designed to allow tessellation of multiple structural elements. The structural element may be designed to allow tiling of structural elements filling a portion of a two-dimensional plane. The structural element
5 may be a triangle. The structural element may be an icosahedron. The structural element may be a six-sided element. The structural element may be designed to facilitate construction of a spherical lighting structure. The structural element may be designed to facilitate construction of a two-dimensional lighting structure. The structural element may include a power facility. The power facility may be a high-voltage power facility.
10 The power facility may be a power-factor-corrected power facility. The power facility may be an on-board power facility. The power facility may be an inductively controlled power facility. The power facility may be a feed-forward power facility. The power facility may be a power/data power facility. The structural element may be a networked lighting unit. The structural element may be addressed using a serial addressing
15 protocol. The structural element may be designed to facilitate construction of a rectangular solid lighting structure.

A method of providing an effect on a lighting system disclosed herein may include: distributing a plurality of lighting units in a geometric configuration, each of the
20 lighting units being an addressable lighting unit; mapping a plurality of addresses corresponding to the plurality of lighting units; providing a control facility for controlling the plurality of lighting units using the plurality of addresses; providing an authoring facility for authoring an effect; and using the authoring facility to generate a scrolling effect on the lighting system, the scrolling effect using the plurality of
25 addresses to map control signals to the locations of selected ones of the plurality of lighting units in the geometric configuration.

In the method, the scrolling effect may be a text effect. The scrolling effect may be an animation effect. The lighting units may be individually addressable. The lighting
30 units may be addressable strings of lighting units. The strings may be flexible. The strings may be disposed as a curtain. The strings may be woven into a fabric. The

-25-

strings may be disposed on an exterior of a building. The strings may be disposed on a wall of an interior of a building. The lighting units may be disposed in a non-rectangular configuration.

5 In another aspect, a system disclosed herein may include a plurality of lighting units in a geometric configuration, each one of the plurality of lighting units having an address and a predetermined location within the geometric configuration; an address mapping of each address of one of the plurality of lighting units to the predetermined location of that one of the plurality of lighting units; a control facility for controlling the
10 lighting units, the control facility configured to access each one of the plurality of lighting units by address; and an authoring facility for authoring an effect including a scrolling effect by applying the address mapping to map actions in a user interface to lighting control signals for selected ones of the plurality of lighting units in the geometric configuration.

15 In the system, the scrolling effect may be a text effect. The scrolling effect may be an animation effect. The lighting units may be individually addressable. The lighting units may be addressable strings of lighting units. The strings may be flexible. The strings may be disposed as a curtain. The strings may be woven into a fabric. The
20 strings may be disposed on an exterior of a building. The strings may be disposed on a wall of an interior of a building. The lighting units may be disposed in a non-rectangular configuration.

 In one aspect, a method of providing a lighting system as disclosed herein
25 includes providing a plurality of LEDs; providing a control facility for the LEDs; and disposing the LEDs and the control facility in a housing, the housing configured to hold an on-board power facility.

 In the method, the power facility may include a high-voltage power facility. The
30 power facility may include a power-factor-corrected power facility. The power facility may include an inductively controlled power facility. The power facility may include a

-26-

feed-forward power facility. The power facility may include a power/data power facility. The lighting system may include an architectural lighting fixture. The lighting system may include a theatrical lighting system. The lighting system may include a lighting system for a transportation environment. The lighting system may include a general illumination lighting system for a venue. The venue may include an entertainment venue. The venue may include a restaurant. The venue may include a nightclub. The venue may include an office. The venue may include an outdoor lighting system for an exterior of a building. The lighting system may include a lighting system for a large-scale display. The lighting system may include an alcove lighting system. The lighting system may include a wall washing lighting system.

In another aspect, a lighting system disclosed herein may include a housing configured to hold an on-board power facility; a plurality of LEDs disposed in the housing; and a control facility disposed in the housing, the control facility configured to control operation of the plurality of LEDs.

In the system, the power facility may include a high-voltage power facility. The power facility may include a power-factor-corrected power facility. The power facility may include an inductively controlled power facility. The power facility may include a feed-forward power facility. The power facility may include a power/data power facility. The lighting system may include an architectural lighting fixture. The lighting system may include a theatrical lighting system. The lighting system may include a lighting system for a transportation environment. The lighting system may include a general illumination lighting system for a venue. The venue may include an entertainment venue. The venue may include a restaurant. The venue may include a nightclub. The venue may include an office. The venue may include an outdoor lighting system for an exterior of a building. The lighting system may include a lighting system for a large-scale display. The lighting system may include an alcove lighting system. The lighting system may include a wall washing lighting system.

30

-27-

It should be appreciated that all combinations of the foregoing concepts and additional concepts discussed in greater detail below are contemplated as being part of the inventive subject matter disclosed herein. In particular, all combinations of claimed subject matter appearing at the end of this disclosure are contemplated as being part of the inventive subject matter disclosed herein.

Brief Description of the Drawings

Fig. 1 depicts a configuration for a controlled lighting system.

Fig. 2 is a schematic diagram with elements for a lighting system.

10 Fig. 3 depicts configurations of light sources that can be used in a lighting system.

Fig. 4 depicts an optical facility for a lighting system.

Fig. 5 depicts diffusers that can serve as optical facilities.

Fig. 6 depicts optical facilities.

15 Fig. 7 depicts optical facilities for lighting systems.

Fig. 8 depicts a tile light housing for a lighting system.

Fig. 9 depicts housings for architectural lighting systems.

Fig. 10 depicts specialized housings for lighting systems.

Fig. 11 depicts housings for lighting systems.

20 Fig. 12 depicts a signage housing for a lighting system.

Fig. 13 depicts a housing for a retrofit lighting unit.

Figs. 14a-d depict housings for a linear fixture.

Fig. 15 depicts a power circuit for a lighting system with power factor correction.

Fig. 16 depicts another embodiment of a power factor correction power system.

25 Fig. 17 depicts another embodiment of a power system for a lighting system that includes power factor correction.

Fig. 18 depicts drive hardware for a lighting system.

Fig. 19 depicts thermal facilities for a lighting system.

Fig. 20 depicts mechanical interfaces for lighting systems.

30 Fig. 21 depicts additional mechanical interfaces for lighting systems.

Figs. 22a-d depict additional mechanical interfaces for a lighting system.

-28-

Fig. 23 depicts a mechanical interface for connecting two linear lighting units.

Fig. 24 depicts drive hardware for a lighting system.

Fig. 25 depicts methods for driving lighting systems.

Fig. 26 depicts a chromaticity diagram for a lighting system.

5 Fig. 27 depicts a configuration for a light system manager.

Fig. 28 depicts a configuration for a networked lighting system.

Fig. 29 depicts an XML parser environment for a lighting system.

Fig. 30 depicts a network with a central control facility for a lighting system.

Fig. 31 depicts network topologies for lighting systems.

10 Fig. 32 depicts a physical data interface for a lighting system with a communication port.

Fig. 33 depicts physical data interfaces for lighting systems.

Fig. 34 depicts user interfaces for lighting systems.

Fig. 35 depicts additional user interfaces for lighting systems.

15 Fig. 36 depicts a keypad user interface.

Fig. 37 depicts a configuration file for mapping locations of lighting systems.

Fig. 38 depicts a binary tree for a method of addressing lighting units.

Fig. 39 depicts a flow diagram for mapping locations of lighting units.

Fig. 40 depicts steps for mapping lighting units.

20 Fig. 41 depicts a method for mapping and grouping lighting systems for purposes of authoring shows.

Fig. 42 depicts a graphical user interface for authoring lighting shows.

Fig. 43 depicts a user interface screen for an authoring facility.

Fig. 44 depicts effects and meta effects for a lighting show.

25 Fig. 45 depicts steps for converting an animation into a set of lighting control signals.

Fig. 46 depicts steps for associating lighting control signals with other object-oriented programs.

Fig. 47 depicts parameters for effects.

30 Fig. 48 depicts effects that can be created using lighting systems.

Fig. 49 depicts additional effects.

-29-

Fig. 50 depicts additional effects.

Fig. 51 depicts environments for lighting systems.

Fig. 52 depicts additional environments for lighting systems.

Fig. 53 depicts additional environments for lighting systems.

5 Fig. 54 depicts additional environments for lighting systems.

Fig. 55 depicts additional environments for lighting systems.

Fig. 56 depicts a retrofit housing for a linear fixture.

Fig. 57 depicts an embodiment of a retrofit housing for a linear fixture.

Fig. 58 depicts an embodiment of a retrofit housing for a cylindrical fixture.

10 Fig. 59 depicts a retrofit housing for a linear fixture.

Fig. 60 depicts a bottom view of a retrofit housing for a linear fixture.

Fig. 61 depicts a retrofit unit disposed over a ballast for a fluorescent fixture.

Fig. 62 depicts a retrofit unit disposed over a ballast for a fluorescent fixture.

Fig. 63 depicts a retrofit unit for a hanging light fixture.

15 Fig. 64 depicts a retrofit unit for a down light fixture.

Fig. 65 depicts a board designed to fit on a substantially rectangular fixture.

Fig. 66 depicts a retrofit unit for a traditional lighting fixture.

Fig. 67 depicts a lighting unit with two perpendicular planes.

20 Fig. 68 depicts a lighting unit with power and data supplied to both ends of the unit.

Fig. 69 depicts a lighting unit with power and data supplied to one end of the unit.

Fig. 70 depicts a flared thermal facility for a lighting unit.

Fig. 71 depicts a cylindrical lighting unit with a thermal facility.

25 Fig. 72 depicts a lighting unit with three sides.

Fig. 73 depicts a cover for an array of LEDs on a board, where the cover includes optical elements.

Fig. 74 depicts boards with magnetic interconnections.

Figs. 75 and 76 depict boards with interlocking connectors.

30 Fig. 77 depicts a board with a motion sensor.

Fig. 78 depicts a board with an attachable optical lens element.

-30-

Fig. 79 depicts a lighting unit formed as a modular block.

Fig. 80 depicts a lighting unit formed on flexible circuit board material.

Fig. 81 depicts a cleat-type mounting for an array-type lighting unit.

5

Detailed Description

Referring to Fig. 1, in a lighting system 100 a lighting unit 102 is controlled by a control facility 3500. In embodiments, the control facility 3500 controls the intensity, color, saturation, color temperature, on-off state, brightness, or other feature of light that is produced by the lighting unit 102. The lighting unit 102 can draw power from a power facility 1800. The lighting unit 102 can include a light source 300, which in
10 embodiments is a solid-state light source, such as a semiconductor-based light source, such as light emitting diode, or LED.

Referring to Fig. 2, the system 100 can be a solid-state lighting system and can
15 include the lighting unit 102 as well as a wide variety of optional control facilities 3500.

In embodiments, the system 100 may include an electrical facility 202 for powering and controlling electrical input to the light sources 300, which may include drive hardware 3802, such as circuits and similar elements, and the power facility 1800.
20

In embodiments the system can include a mechanical interface 3200 that allows the lighting unit 102 to mechanically connect to other portions of the system 100, or to external components, products, lighting units, housings, systems, hardware, or other items.
25

The lighting unit 102 may have a primary optical facility 1700, such as a lens, mirror, or other optical facility for shaping beams of light that exit the light source, such as photons exiting the semiconductor in an LED package
30

The system 100 may include an optional secondary optical facility 400, which may diffuse, spread, focus, filter, diffract, reflect, guide or otherwise affect light coming

-31-

from a light source 300. The secondary optical facility 400 may include one or many elements.

In embodiments, the light sources 300 may be disposed on a support structure, such as a board 204. The board 204 may be a circuit board or similar facility suitable for holding light sources 300 as well as electrical components, such as components used in the electrical facility 202.

In embodiments the system 100 may include a thermal facility 2500, such as a heat-conductive plate, metal plate, gap pad, liquid heat-conducting material, potting facility, fan, vent, or other facility for removing heat from the light sources 300.

The system 100 may optionally include a housing 800, which in embodiments may hold the board 204, the electrical facility 202, the mechanical interface 3200, and the thermal facility 2500. In some embodiments, no housing 800 is present.

In embodiments the system 100 is a standalone system with an on-board control facility 3500. The system 100 can include a processor 3600 for processing data to accept control instructions and to control the drive hardware 3802.

In embodiments the system 100 can respond to control of a user interface 4908, which may provide control directly to the lighting unit 102, such as through a switch, dial, button, dipswitch, slide mechanism, or similar facility or may provide control through another facility, such as a network interface 4902, a light system manager 5000, or other facility.

The system 100 can include a data storage facility 3700, such as memory. In a standalone embodiment the data storage facility 3700 may be memory, such as random access memory. In other embodiments the data storage facility 3700 may include any other facility for storing and retrieving data.

-32-

The system 100 can produce effects 9200, such as illumination effects 9300 that illuminate a subject 9900 and direct view effects 9400 where the viewer is intended to view the light sources 300 or the secondary optical facility 400 directly, in contrast to viewing the illumination produced by the light sources 300, as in illumination effects 9300. Effects can be static and dynamic, including changes in color, color-temperature, intensity, hue, saturation and other features of the light produced by the light sources 300. Effects from lighting units 102 can be coordinated with effects from other systems, including other lighting units 102.

10 The system 100 can be disposed in a wide variety of environments 9600, where effects 9200 interact with aspects of the environments 9600, such as subjects 9900, objects, features, materials, systems, colors or other characteristics of the environments. Environments 9600 can include interior and exterior environments, architectural and entertainment environments, underwater environments, commercial environment, 15 industrial environments, recreational environments, home environments, transportation environments and many others.

Subjects 9900 can include a wide range of subjects 9900, ranging from objects such as walls, floors and ceilings to alcoves, pools, spas, fountains, curtains, people, 20 signs, logos, buildings, rooms, objects of art and photographic subjects, among many others.

While embodiments of a control facility 3500 may be as simple as a single processor 3600, data storage facility 3700 and drive hardware 3802, in other 25 embodiments more complex control facilities 3500 are provided. Control facilities may include more complex drive facilities 3800, including various forms of drive hardware 3802, such as switches, current sinks, voltage regulators, and complex circuits, as well as various methods of driving 4300, including modulation techniques such as pulse-width-modulation, pulse-amplitude-modulation, combined modulation techniques, table-based 30 modulation techniques, analog modulation techniques, and constant current techniques.

-33-

In embodiments a control facility 3500 may include a combined power/data protocol 4800 for controlling light sources 300 in response to data delivered over power lines.

A control facility 3500 may include a control interface 4900, which may include
5 a physical interface 4904 for delivering data to the lighting unit 102. The control interface 4900 may also include a computer facility, such as a light system manager 5000 for managing the delivery of control signals, such as for complex shows and effects 9200 to lighting units 102, including large numbers of lighting units 102 deployed in complex geometric configurations over large distances.

10

The control interface 4900 may include a network interface 4902, such as for handling network signals according to any desired network protocol, such as DMX, Ethernet, TCP/IP, DALI, 802.11 and other wireless protocols, and linear addressing protocols, among many others. In embodiments the network interface 4902 may support
15 multiple protocols for the same lighting unit 102.

In embodiments involving complex control, the physical data interface 4904 may include suitable hardware for handling data transmissions, such as USB ports, serial ports, Ethernet facilities, wires, routers, switches, hubs, access points, buses, multi-
20 function ports, intelligent sockets, intelligent cables, flash and USB memory devices, file players, and other facilities for handling data transfers.

In embodiments the control facility 3500 may include an addressing facility 6600, such as for providing an identifier or address to one or more lighting units 102.
25 Many kinds of addressing facility 6600 may be used, including facilities for providing network addresses, dipswitches, bar codes, sensors, cameras, and many others.

In embodiments the control facility 3500 may include an authoring facility 7400 for authoring effects 9200, including complex shows, static and dynamic effects. The
30 authoring facility 7400 may be associated with the light system manager 5000, such as to facilitate delivery of control signals for complex shows and effects over a network

-34-

interface 4900 to one or more lighting units 102. The authoring facility 7400 may include a geometric authoring facility, an interface for designing light shows, an object-oriented authoring facility, an animation facility, or any of a variety of other facilities for authoring shows and effects.

5

In embodiments the control facility 3500 may take input from a signal sources 8400, such as a sensor 8402, an information source, a light system manager 5000, a user interface 4908, a network interface 4900, a physical data interface 4904, an external system 8800, or any other source capable of producing a signal.

10

In embodiments the control facility 3500 may respond to an external system 8800. The external system 8800 may be a computer system, an automation system, a security system, an entertainment system, an audio system, a video system, a personal computer, a laptop computer, a handheld computer, or any of a wide variety of other systems that are capable of generating control signals.

15

Referring to Fig. 3, the lighting unit 102 may be any kind of lighting unit 102 that is capable of responding to control, but in embodiments the lighting unit 102 includes a light source 300 that is a solid-state light source, such as a semiconductor-based light source, such as a light emitting diode, or LED. Lighting units 102 can include LEDs that produce a single color or wavelength of light, or LEDs that produce different colors or wavelengths, including red, green, blue, white, orange, amber, ultraviolet, infrared, purple or any other wavelength of light. Lighting units 102 can include other light sources, such as organic LEDs, or OLEDs, light emitting polymers, crystallo-

luminescent lighting units, lighting units that employ phosphors, luminescent polymers and other sources. In other embodiments, lighting units 102 may include incandescent sources, halogen sources, metal halide sources, fluorescent sources, compact fluorescent sources and others.

20

25

30

Referring still to Fig. 3, the sources 300 can be point sources or can be arranged in many different configurations 302, such as a linear configuration 306, a circular

-35-

configuration 308, an oval configuration 304, a curvilinear configuration, or any other geometric configuration, including two-dimensional and three-dimensional configurations. The sources 300 can also be mixed, including sources 300 of varying wavelength, intensity, power, quality, light output, efficiency, efficacy or other characteristics. In embodiments sources 300 for different lighting units 102 are consistently mixed to provide consistent light output for different lighting units 102. In embodiments the sources are mixed 300 to allow light of different colors or color temperatures, including color temperatures of white. Various mixtures of sources 300 can produce substantially white light, such as mixtures of red, green and blue LEDs, single white sources 300, two white sources of varying characteristics, three white sources of varying characteristics, or four or more white sources of varying characteristics. One or more white source can be mixed with, for example, an amber or red source to provide a warm white light or with a blue source to produce a cool white light.

Sources 300 may be constructed and arranged to produce a wide range of variable color radiation. For example, the source 300 may be particularly arranged such that the processor-controlled variable intensity light generated by two or more of the light sources combines to produce a mixed colored light (including essentially white light having a variety of color temperatures). In particular, the color (or color temperature) of the mixed colored light may be varied by varying one or more of the respective intensities of the light sources or the apparent intensities, such as using a duty cycle in a pulse width modulation technique. Combinations of LEDs with other mechanisms that affect light characteristics, such as phosphors, are also encompassed herein.

Any combination of LED colors can produce a gamut of colors, whether the LEDs are red, green, blue, amber, white, orange, UV, or other colors. The various embodiments described throughout this specification encompass all possible combinations of LEDs in lighting units 102, so that light of varying color, intensity, saturation and color temperature can be produced on demand under control of a control facility 3500.

-36-

Although mixtures of red, green and blue have been proposed for light due to their ability to create a wide gamut of additively mixed colors, the general color quality or color rendering capability of such systems are not ideal for all applications. This is primarily due to the narrow bandwidth of current red, green and blue emitters. However, wider band sources do make possible good color rendering, as measured, for example, by the standard CRI index. In some cases this may require LED spectral outputs that are not currently available. However, it is known that wider-band sources of light will become available, and such wider-band sources are encompassed as sources for lighting units 102 described herein..

Additionally, the addition of white LEDs (typically produced through a blue or UV LED plus a phosphor mechanism) does give a 'better' white, but it still can be limiting in the color temperature that is controllable or selectable from such sources.

The addition of white to a red, green and blue mixture may not increase the gamut of available colors, but it can add a broader-band source to the mixture. The addition of an amber source to this mixture can improve the color still further by 'filling in' the gamut as well.

Combinations of light sources 300 can help fill in the visible spectrum to faithfully reproduce desirable spectrums of lights. These include broad daylight equivalents or more discrete waveforms corresponding to other light sources or desirable light properties. Desirable properties include the ability to remove pieces of the spectrum for reasons that may include environments where certain wavelengths are absorbed or attenuated. Water, for example tends to absorb and attenuate most non-blue and non-green colors of light, so underwater applications may benefit from lights that combine blue and green sources 300.

Amber and white light sources can offer a color temperature selectable white source, wherein the color temperature of generated light can be selected along the black

-37-

body curve by a line joining the chromaticity coordinates of the two sources. The color temperature selection is useful for specifying particular color temperature values for the lighting source.

Orange is another color whose spectral properties in combination with a white LED-based light source can be used to provide a controllable color temperature light from a lighting unit 102.

As used herein for purposes of the present disclosure, the term "LED" should be understood to include any light emitting diode or other type of carrier injection / junction-based system that is capable of generating radiation in response to an electric signal. Thus, the term LED includes, but is not limited to, various semiconductor-based structures that emit light in response to current, light emitting polymers, light-emitting strips, electro-luminescent strips, and the like.

In particular, the term LED refers to light emitting diodes of all types (including semi-conductor and organic light emitting diodes) that may be configured to generate radiation in one or more of the infrared spectrum, ultraviolet spectrum, and various portions of the visible spectrum (generally including radiation wavelengths from approximately 400 nanometers to approximately 700 nanometers). Some examples of LEDs include, but are not limited to, various types of infrared LEDs, ultraviolet LEDs, red LEDs, blue LEDs, green LEDs, yellow LEDs, amber LEDs, orange LEDs, and white LEDs (discussed further below). It also should be appreciated that LEDs may be configured to generate radiation having various bandwidths for a given spectrum (e.g., narrow bandwidth, broad bandwidth).

For example, one implementation of an LED configured to generate essentially white light (e.g., a white LED) may include a number of dies which respectively emit different spectrums of luminescence that, in combination, mix to form essentially white light. In another implementation, a white light LED may be associated with a phosphor material that converts luminescence having a first spectrum to a different second spectrum. In one example of this implementation, luminescence having a relatively short

-38-

wavelength and narrow bandwidth spectrum “pumps” the phosphor material, which in turn radiates longer wavelength radiation having a somewhat broader spectrum.

It should also be understood that the term LED does not limit the physical and/or electrical package type of an LED. For example, as discussed above, an LED may refer to a single light emitting device having multiple dies that are configured to respectively emit different spectrums of radiation (e.g., that may or may not be individually controllable). Also, an LED may be associated with a phosphor that is considered as an integral part of the LED (e.g., some types of white LEDs). In general, the term LED may refer to packaged LEDs, non-packaged LEDs, surface mount LEDs, chip-on-board LEDs, radial package LEDs, power package LEDs, LEDs including some type of encasement and/or optical element (e.g., a diffusing lens), etc.

The term “light source” should be understood to refer to any one or more of a variety of radiation sources, including, but not limited to, LED-based sources as defined above, incandescent sources (e.g., filament lamps, halogen lamps), fluorescent sources, phosphorescent sources, high-intensity discharge sources (e.g., sodium vapor, mercury vapor, and metal halide lamps), lasers, other types of luminescent sources, electro-luminescent sources, pyro-luminescent sources (e.g., flames), candle-luminescent sources (e.g., gas mantles, carbon arc radiation sources), photo-luminescent sources (e.g., gaseous discharge sources), cathode luminescent sources using electronic saturation, galvano-luminescent sources, crystallo-luminescent sources, kine-luminescent sources, thermo-luminescent sources, triboluminescent sources, sonoluminescent sources, radioluminescent sources, and luminescent polymers.

25

A given light source may be configured to generate electromagnetic radiation within the visible spectrum, outside the visible spectrum, or a combination of both. Hence, the terms “light” and “radiation” are used interchangeably herein. Additionally, a light source may include as an integral component one or more filters (e.g., color filters), lenses, or other optical components. Also, it should be understood that light sources may be configured for a variety of applications, including, but not limited to, indication

30

-39-

and/or illumination. An “illumination source” is a light source that is particularly configured to generate radiation having a sufficient intensity to effectively illuminate an interior or exterior space.

5 The term “spectrum” should be understood to refer to any one or more frequencies (or wavelengths) of radiation produced by one or more light sources. Accordingly, the term “spectrum” refers to frequencies (or wavelengths) not only in the visible range, but also frequencies (or wavelengths) in the infrared, ultraviolet, and other areas of the overall electromagnetic spectrum. Also, a given spectrum may have a
10 relatively narrow bandwidth (essentially few frequency or wavelength components) or a relatively wide bandwidth (several frequency or wavelength components having various relative strengths). It should also be appreciated that a given spectrum may be the result of a mixing of two or more other spectrums (e.g., mixing radiation respectively emitted from multiple light sources).

15 For purposes of this disclosure, the term “color” is used interchangeably with the term “spectrum.” However, the term “color” generally is used to refer primarily to a property of radiation that is perceivable by an observer (although this usage is not intended to limit the scope of this term). Accordingly, the terms “different colors”
20 implicitly refer to different spectrums having different wavelength components and/or bandwidths. It also should be appreciated that the term “color” may be used in connection with both white and non-white light.

 The term “color temperature” generally is used herein in connection with white
25 light, although this usage is not intended to limit the scope of this term. Color temperature essentially refers to a particular color content or shade (e.g., reddish, bluish) of white light. The color temperature of a given radiation sample conventionally is characterized according to the temperature in degrees Kelvin (K) of a black body radiator that radiates essentially the same spectrum as the radiation sample in question. The color
30 temperature of white light generally falls within a range of from approximately 700

-40-

degrees K (generally considered the first visible to the human eye) to over 10,000 degrees K.

Lower color temperatures generally indicate white light having a more significant red component or a “warmer feel,” while higher color temperatures generally indicate white light having a more significant blue component or a “cooler feel.” By way of example, a wood burning fire has a color temperature of approximately 1,800 degrees K, a conventional incandescent bulb has a color temperature of approximately 2848 degrees K, early morning daylight has a color temperature of approximately 3,000 degrees K, and overcast midday skies have a color temperature of approximately 10,000 degrees K. A color image viewed under white light having a color temperature of approximately 3,000 degree K has a relatively reddish tone, whereas the same color image viewed under white light having a color temperature of approximately 10,000 degrees K has a relatively bluish tone.

Illuminators may be selected so as to produce a desired level of output, such as a desired total number of lumens of output, such as to make a lighting unit 102 consistent with or comparable to another lighting unit 102, which might be a semiconductor illuminator or might be another type of lighting unit, such as an incandescent, fluorescent, halogen or other light source, such as if a designer or architect wishes to fit semiconductor-based lighting units 102 into installations that use such traditional units.

The number and type of semiconductor illuminators can be selected to produce the desired lumens of output, such as by selecting some number of one-watt, five-watt, power package or other LEDs. In embodiments two or three LEDs are chosen. In other embodiments any number of LEDs, such as six, nine, twenty, thirty, fifty, one hundred, three hundred or more LEDs can be chosen.

Referring to Fig. 4, a system 100 can include a secondary optical facility 400 to optically process the radiation generated by the light sources 300, such as to change one or both of a spatial distribution and a propagation direction of the generated radiation. In

-41-

particular, one or more optical facilities may be configured to change a diffusion angle of the generated radiation. One or more optical facilities 400 may be particularly configured to variably change one or both of a spatial distribution and a propagation direction of the generated radiation (e.g., in response to some electrical and/or mechanical stimulus). An actuator 404, such as under control of a control facility 3500, can control an optical facility 400 to produce different optical effects.

Referring to Fig. 5, an optical facility 400 may be a diffuser 502. A diffuser may absorb and scatter light from a source 300, such as to produce a glowing effect in the diffuser. As seen in Fig. 5, diffusers 502 can take many different shapes, such as tubes, cylinders, spheres, pyramids, cubes, tiles, panels, screens, doughnut shapes, V-shapes, T-shapes, U-shapes, junctions, connectors, linear shapes, curves, circles, squares, rectangles, geometric solids, irregular shapes, shapes that resemble objects found in nature, and any other shape. Diffusers may be made of plastics, polymers, hydrocarbons, coated materials, glass materials, crystals, micro-lens arrays, fiber optics, or a wide range of other materials. Diffusers 502 can scatter light to provide more diffuse illumination of other objects, such as walls or alcoves. Diffusers 502 can also produce a glowing effect when viewed directly by a viewer. In embodiments, it may be desirable to deliver light evenly to the interior surface of a diffuser 502. For example, a reflector 600 may be disposed under a diffuser 502 to reflect light to the interior surface of the diffuser 502 to provide even illumination.

Diffusing material can be a substantially light-transmissive material, such as a fluid, gel, polymer, gas, liquid, vapor, solid, crystal, fiber optic material, or other material. In embodiments the material may be a flexible material, so that the diffuser may be made flexible. The diffuser may be made of a flexible material or a rigid material, such as a plastic, rubber, a crystal, PVC, glass, a polymer, a metal, an alloy or other material.

Referring to Fig. 6, an optical facility 400 may include a reflector 600 for reflecting light from a light source 300. Embodiments include a parabolic reflector 612

-42-

for reflecting light from many angles onto an object, such as an object to be viewed in a machine vision system. Other reflectors 600 include mirrors, spinning mirrors 614, reflective lenses, and the like. In some cases, the optical facility 400 may operate under control of a processor 3600. Optical facilities 500 can also include lenses 402, including microlens arrays that can be disposed on a flexible material.

Other examples of optical facilities 400 include, but are not limited to, reflectors, lenses, reflective materials, refractive materials, translucent materials, filters, mirrors, spinning mirrors, dielectric mirrors, Bragg cells, MEMs, acousto-optic modulators, crystals, gratings and fiber optics. The optical facility 400 also may include a phosphorescent material, luminescent material, or other material capable of responding to or interacting with the generated radiation.

Variable optics can provide discrete or continuous adjustment of beam spread or angle or simply the profile of the light beam emitted from a fixture. Properties can include, but are not limited to, adjusting the profile for surfaces that vary in distance from the fixture, such as wall washing fixtures. In various embodiments, the variable nature of the optic can be manually adjusted, adjusted by motion control or automatically be controlled dynamically.

Referring to Fig. 7, actuation of variable optics can be through any kind of actuator, such as an electric motor, piezoelectric device, thermal actuator, motor, gyro, servo, lever, gear, gear system, screw drive, drive mechanism, flywheel, wheel, or one of many well-known techniques for motion control. Manual control can be through an adjustment mechanism that varies the relative geometry of lens, diffusion materials, reflecting surfaces or refracting elements. The adjustment mechanism may use a sliding element, a lever, screws, or other simple mechanical devices or combinations of simple mechanical devices. A manual adjustment or motion control adjustment may allow the flexing of optical surfaces to bend and shape the light passed through the system or reflected or refracted by the optical system.

-43-

Actuation can also be through an electromagnetic motor or one of many actuation materials and devices. Optical facilities 400 can also include other actuators, such as piezo-electric devices, MEMS devices, thermal actuators, processors, and many other forms of actuators.

5 A wide range of optical facilities 400 can be used to control light. Such devices as Bragg cells or holographic films can be used as optical facilities 400 to vary the output of a fixture. A Bragg cell or acoustic-optic modulator can provide for the movement of light with no other moving mechanisms. The combination of controlling the color (hue, saturation and value) as well as the form of the light beam brings a tremendous amount
10 of operative control to a light source. The use of polarizing films can be used to reduce glare and allow the illumination and viewing of objects that present specular surfaces, which typically are difficult to view. Moving lenses and shaped non-imaging surfaces can provide optical paths to guide and shape light.

 In other embodiments, fluid-filled surfaces 428 and shapes can be manipulated to
15 provide an optical path. In combination with lighting units, such shapes can provide varying optical properties across the surface and volume of the fluid-filled material. The fluid-filled material can also provide a thermal dissipation mechanism for the light-emitting elements. The fluid can be water, polymers, silicone or other transparent or translucent liquid or a gas of any type and mixture with desirable optical or thermal
20 properties.

 In other embodiments, gelled, filled shapes can be used in conjunction with light sources to evenly illuminate said shapes. Light propagation and diffusion is accomplished through the scattering of light through the shape.

 In other embodiments, spinning mirror systems such as those used in laser optics
25 for scanning (E.g. bar code scanners or 3D terrain scanners) can be used to direct and move a beam of light. That combined with the ability to rapidly turn on and off a lighting unit 102 can allow a beam of light to be spread across a larger area and change colors to 'draw' shapes of varying patterns. Other optical facilities 400 for deflecting and changing light patterns are known and described in the literature. They include

-44-

methods for beam steering, such as mechanical mirrors, driven by stepper or galvanometer motors and more complex robotic mechanisms for producing sophisticated temporal effects or static control of both color (HS&V) and intensity. Optical facilities 400 also include acousto-optic modulators that use sound waves generated via piezoelectrics to control and steer a light beam. They also include digital mirror devices and digital light processors, such as available from Texas Instruments. They also include grating light valve technology (GLV), as well as inorganic digital light deflection. They also include dielectric mirrors, such as developed at Massachusetts Institute of Technology.

Control of form and texture of the light can include not only control of the shape of the beam but also control of the way in which the light is patterned across its beam. An example of a use of this technology may be in visual merchandising, where product 'spotlights' could be created while other media is playing in a coordinated manner. Voice-overs or music-overs or even video can be played during the point at which a product is highlighted during a presentation. Lights that move and 'dance' can be used in combination with A/V sources for visual merchandising purposes.

Optical facilities 400 can be light pipes, lenses, light guides and fibers and any other light transmitting materials.

In other embodiments, non-imaging optics are used as an optical facility. Non-imaging optics do not require traditional lenses. They use shaped surfaces to diffuse and direct light. A fundamental issue with fixtures using discrete light sources is mixing the light to reduce or eliminate color shadows and to produce uniform and homogenous light output. Part of the issue is the use of high efficiency surfaces that do not absorb light but bounce and reflect the light in a desired direction or manner. Optical facilities can be used to direct light to create optical forms of illumination from lighting units 102.

The actuator 404 can be any type of actuator for providing linear movement, such as an electromechanical element, a screw drive mechanism (such as used in computer printers), a screw drive, or other element for linear movement known to those of ordinary skill in the art.

-45-

In embodiments the optical facility is a fluid filled lens, which contains a compressible fluid, such as a gas or liquid. The actuator includes a valve for delivering fluid to the interior chamber of the lens.

5

In embodiments a digital mirror 408 serves as an optical facility 400. The digital mirror is optionally under control of a processor 3600, which governs the reflective properties of the digital mirror.

10

In embodiments a spinning mirror system 614 serves as an optical facility 400. As in other embodiments, the spinning mirror system is responsive to the control of a processor, which may be integrated with it or separate.

15

In embodiments a grating light valve (GLV) 418 serves as an optical facility 400. The grating light valve can receive light from a lighting unit under control of a processor. GLV uses micro-electromechanical systems (MEMS) technology and optical physics to vary how light is reflected from each of multiple ribbon-like structures that represent a particular "image point" or pixel. The ribbons can move a tiny distance, such as between an initial state and a depressed state. When the ribbons move, they change the wavelength of reflected light. Grayscale tones can also be achieved by varying the speed at which given pixels are switched on and off. The resulting image can be projected in a wide variety of environments, such as a large arena with a bright light source or on a small device using low power light sources. In the GLV, picture elements (pixels) are formed on the surface of a silicon chip and become the source for projection.

20
25

In embodiments an acousto-optical modulator serves as an optical facility 400. Also known as a tunable filter and as a Bragg cell, the acousto-optical modulator consists of a crystal that is designed to receive acoustic waves generated, for example, by a transducer, such as a piezoelectric transducer. The acoustic standing waves produce index of refraction changes in the crystal, essentially due to a Doppler shift, so that the crystal serves as a tunable diffraction grating. Incident light, such as from a lighting unit

30

-46-

102, is reflected in the crystal by varying degrees, depending on the wavelength of the acoustic standing waves induced by the transducer. The transducer can be responsive to a processor, such as to convert a signal of any type into an acoustic signal that is sent through the crystal.

5

Referring again to Fig. 6, in embodiments the optical facility 400 is a reflector 612, such as a reflective dome for providing illumination from a wide variety of beam angles, rather than from one or a small number of beam angles. Providing many beam angles reduces harsh reflections and provides a smoother view of an object. A reflective surface is provided for reflecting light from a lighting unit 102 to the object. The reflective surface is substantially parabolic, so that light from the lighting unit 102 is reflected substantially to the object, regardless of the angle at which it hits the reflective surface from the lighting unit 102. The surface could be treated to a mirror surface, or to a matte Lambertian surface that reflects light substantially equally in all directions. As a result, the object is lit from many different angles, making it visible without harsh reflections. The object may optionally be viewed by a camera, which may optionally be part of or in operative connection with a vision system. The camera may view the object through a space in the reflective surface, such as located along an axis of viewing from above the object. The object may rest on a platform, which may be a moving platform. The platform, light system 100, vision system and camera may each be under control of a processor, so that the viewing of the object and the illumination of the object may be coordinated, such as to view the object under different colors of illumination.

10

15

20

25

30

Referring to Fig. 7, optical facilities include a light pipe 420 that reflects light to produce a particular pattern of light at the output end. A different shape of light pipe produces a different pattern. In general, such secondary optics, whether imaging or non-imaging, and made of plastic, glass, mirrors or other materials, can be added to a lighting unit 102 to shape and form the light emission. Such an optical facility 400 can be used to spread, narrow, diffuse, diffract, refract or reflect the light in order that a different output property of the light is created. These can be fixed or variable. Examples can be light

-47-

pipes, lenses, light guides and fibers and any other light transmitting materials, or a combination of any of these.

In embodiments the light pipe 420 serves as an optical facility, delivering light from one or more lighting systems 102 to an illuminated material. The lighting systems 100 are optionally controlled by a control facility 3500, which controls the lighting systems 102 to send light of selected colors, color temperatures, intensities and the like into the interior of the light pipe. In other embodiments a central controller is not required, such as in embodiments where the lighting systems 102 include their own processor. In embodiments one or more lighting systems 102 may be equipped with a communications facility, such as a data port, receiver, transmitter, or the like. Such lighting systems 102 may receive and transmit data, such as to and from other lighting systems 100. Thus, a chain of lighting systems 100 in a light pipe may transmit not only light, but also data along the pipe, including data that sends control signals for the lighting systems disposed in the pipe.

The optical facility may be a color mixing system 422 for mixing color from a lighting unit 102. The color mixing system may consist of two opposing truncated conical sections, which meet at a boundary. Light from a lighting unit 102 is delivered into the color mixing system and reflected from the interior surfaces of the two sections. The reflections mix the light and produce a mixed light from the distal end of the color mixing system. US Patent 2,686,866 to Williams, incorporated by reference herein, shows a color mixing lighting apparatus utilizing two inverted cones to reflect and mix the light from multiple sources. By combining a color mixing system such as this with color changes from the lighting unit 102, a user can produce a wide variety of lighting effects.

Other color mixing systems can work well in conjunction with color changing lighting systems 102. For example, US Patent 2, 673, 923 to Williams, also incorporated by reference herein, uses a series of lens plates for color mixing.

-48-

In embodiments an optical facility is depicted consisting of a plurality of cylindrical lens elements. These cylindrical elements diffract light from a lighting unit 102, producing a variety of patterns of different colors, based on the light from the lighting unit 102. The cylinders may be of a wide variety of sizes, ranging from
5 microlens materials to conventional lenses.

In embodiments the optical facility 400 is a microlens array 424. The microlens array consists of a plurality of microscopic hexagonal lenses, aligned in a honeycomb configuration. Microlenses are optionally either refractive or diffractive, and can be as
10 small as a few microns in diameter. Microlens arrays can be made using standard materials such as fused silica and silicon and newer materials such as Gallium Phosphide, making possible a very wide variety of lenses. Microlenses can be made on one side of a material or with lenses on both sides of a substrate aligned to within as little as one micron. Surface roughness values of 20 to 80 angstroms RMS are typical, and the
15 addition of various coatings can produce optics with very high transmission rates. The microlens array can refract or diffract light from a lighting unit 102 to produce a variety of effects.

In embodiments a microlens array optical facility 400 can consist of a plurality of
20 substantially circular lens elements. The array can be constructed of conventional materials such as silica, with lens diameters on the range of a few microns. The array can operate on light from a lighting unit 102 to produce a variety of colors and optical effects.

25 In embodiments a microlens array is disposed in a flexible material, so that the optical facility 400 can be configured by bending and shaping the material that includes the array.

In embodiments a flexible microlens array is rolled to form a cylindrical shape
30 for receiving light from a lighting unit 102. The configuration could be used, for example, as a light-transmissive lamp shade with a unique appearance.

-49-

In embodiments a system can be provided to roll a microlens array about an axis. A drive mechanism can roll or unroll the flexible array under control of a controller. The controller can also control a lighting unit 102, so that the array is disposed in front of the
5 lighting unit 102 or rolled away from it, as selected by the user.

The terms “lighting unit,” “luminaire” and “lighting fixture” are used herein to refer to an apparatus including one or more light sources 300. A given lighting unit 102 may have any one of a variety of mounting arrangements for the light source(s) in a
10 variety of housings 800. Housings 800 may include enclosures, platforms, boards, mountings, and many other form factors, including forms designed for other purposes. Housings 800 may be made of any material, such as metals, alloys, plastics, polymers, and many others.

15 Referring to Fig. 8, housings 800 may include panels 804 that consist of a support platform on which light sources 300 are disposed in an array. Equipped with a diffuser 502, a panel 804 can form a light tile 802. The diffuser 502 for a light tile 802 can take many forms, as depicted in Fig. 8. The light tile 802 can be of any shape, such as square, rectangular, triangular, circular or irregular. The light tile 802 can be used on or as a part
20 of a wall, door, window, ceiling, floor, or other architectural features, or as a work of art, or as a toy, novelty item, or item for entertainment, among other uses. Housings 800 may be configured as tiles or panels, such as for wall-hangings, walls, ceiling tiles, or floor tiles.

25 Referring to Fig. 9, housings 800 may include a housing for an architectural lighting fixture 810, such as a wall-washing fixture. Housings 800 may be square, rectangular 810, circular, cylindrical 812, or linear 814. A linear housing 814 may be equipped with a diffuser 502 to simulate a neon light of various shapes, or it may be provided without a diffuser, such as to light an alcove or similar location. A housing 800
30 may be provided with a watertight seal, to provide an underwater lighting system 818.

-50-

Housings 800 may be configured to resemble retrofit bulbs, fluorescent bulbs, incandescent bulbs, halogen lamps, high-intensity discharge lamps, or other kinds of bulbs and lamps. Housings 800 may be configured to resemble neon lights, such as for signs, logos, or decorative purposes. Housings 800 may be configured to highlight architectural features, such as lines of a building, room or architectural feature. Housings 800 may be configured for various industrial applications, such as medical lighting, surgical lighting, automotive lighting, under-car lighting, machine vision lighting, photographic lighting, lighting for building interiors or exteriors, lighting for transportation facilities, lighting for pools, spas, fountains and baths, and many other kinds of lighting.

Additionally, one or more lighting units similar to that described in connection with Fig. 2 may be implemented in a variety of products including, but not limited to, various forms of light modules or bulbs having various shapes and electrical/mechanical coupling arrangements (including replacement or “retrofit” modules or bulbs adapted for use in conventional sockets or fixtures), as well as a variety of consumer and/or household products (e.g., night lights, toys, games or game components, entertainment components or systems, utensils, appliances, kitchen aids, cleaning products, etc.).

Lighting units 102 encompassed herein include lighting units 102 configured to resemble all conventional light bulb types, so that lighting units 102 can be conveniently retrofitted into fixtures, lamps and environments suitable for such environments. Such retrofitting lighting units 102 can be designed, as disclosed above and in the applications incorporated herein by reference, to use conventional sockets of all types, as well as conventional lighting switches, dimmers, and other controls suitable for turning on and off or otherwise controlling conventional light bulbs. Retrofit lighting units 102 encompassed herein include incandescent lamps, such as A15 Med, A19 Med, A21 Med, A21 3C Med, A23 Med, B10 Blunt Tip, B10 Crystal, B10 Candle, F15, GT, C7 Candle C7 DC Bay, C15, CA10, CA8, G16/1/2 Cand, G16-1/2 Med, G25 Med, G30 Med, G40 Med, S6 Cand, S6 DC Bay, S11 Cand, S11 DC Bay, S11 Inter, S11 Med, S14 Med, S19 Med, LINESTRA 2-base, T6 Cand, T7 Cand, T7 DC Bay, T7 Inter, T8 Cand, T8 DC

-51-

Bay, T8 Inter, T10 Med, T6-1/2 Inter, T6-1/2 DC Bay, R16 Med, ER30 Med, ER40 Med, BR30 Med, BR40 Med, R14 Inter, R14 Med, K19, R20 Med, R30 Med, R40 Med, R40 Med Skrt, R40 Mog, R52 Mog, P25 Med, PS25 3C, PS25 Med, PS30 Med, PS35 Mog, PS52 Mog, PAR38 Med Skrt, PAR38 Med Sid Pr, PAR46 Scrw Trm, PAR46 Mog End Pr, PAR 46 Med Sid Pr, PAR56 Scrw Trm, PAR56 Mog End Pr, PAR 64 Scrw Trm, and PAR64 Ex Mog End Pr. Also, retrofit lighting units 102 include conventional tungsten/halogen lamps, such as BT4, T3, T4 BI-PIN, T4 G9, MR16, MR11, PAR14, PAR16, PAR16 GU10, PAR20, PAR30, PAR30LN, PAR36, PAR38 Medium Skt., PAR38 Medium Side Prong, AR70, AR111, PAR56 Mog End Pr, PAR64 Mog End Pr, T4 DC Bayonet, T3, T4 Mini Can, T3, T4 RSC Double End, T10, and MB19. Lighting units 102 can also include retrofit lamps configured to resemble high intensity discharge lamps, such as E17, ET18, ET23.5, E25, BT37, BT56, PAR20, PAR30, PAR38, R40, T RSC base, T Fc2 base, T G12 base, T G8.5 base, T Mogul base, and TBY22d base lamps. Lighting units 102 can also be configured to resemble fluorescent lamps, such as T2 Axial Base, T5 Miniature Bipin, T8 Medium Bipin, T8 Medium Bipin, T12 Medium Bipin, U-shaped t-12, OCTRON T-8 U-shaped, OCTRON T8 Recessed Double Contact, T12 Recessed Double Contact, T14-1/2 Recessed Double Contact, T6 Single Pin, T8 Single Pin, T12 Single Pin, ICETRON, Circline 4-Pin T-19, PENTRON CIRCLINE 4-pin T5, DULUX S, DULUX S/E, DULUX D, DULUX D/E, DULUX T, DULUX T/E, DULUX T/E/IN, DULUX L, DULUX F, DULUX EL Triple, DULUX EL TWIST DULUX EL CLASSIC, DULUX EL BULLET, DULUX EL Low Profile GLOBE, DULUX EL GLOBE, DULUE EL REFLECTOR, and DULUX EL Circline. Lighting units 102 can also include specialty lamps, such as for medical, machine vision, or other industrial or commercial applications, such as airfield/aircraft lamps, audio visual maps, special purpose heat lamps, studio, theatre, TV and video lamps, projector lamps, discharge lamps, marine lamps, aquatic lamps, and photo-optic discharge lamps, such as HBO, HMD, HMI, HMP, HSD, HSR, HTI, LINEX, PLANON, VIP, XBO and XERADEX lamps. Other lamps types can be found in product catalog for lighting manufacturers, such as the Sylvania Lamp and Ballast Product Catalog 2002, from Sylvania Corporation or similar catalogs offered by General Electric and Philips Corporation.

-52-

In embodiments the lighting system may have a housing configured to resemble a fluorescent or neon light. The housing may be linear, curved, bent, branched, or in a "T" or "V" shape, among other shapes.

5

Housings 800 can take various shapes, such as one that resembles a point source, such as a circle or oval. Such a point source can be located in a conventional lighting fixture, such as lamp or a cylindrical fixture. Lighting units 102 can be configured in substantially linear arrangements, either by positioning point sources in a line, or by
10 disposing light sources substantially in a line on a board located in a substantially linear housing, such as a cylindrical housing. A linear lighting unit can be placed end-to-end with other linear elements or elements of other shapes to produce longer linear lighting systems comprised of multiple lighting units 102 in various shapes. A housing can be curved to form a curvilinear lighting unit. Similarly, junctions can be created with
15 branches, "Ts," or "Ys" to created a branched lighting unit. A bent lighting unit can include one or more "V" elements. Combinations of various configurations of point source, linear, curvilinear, branched and bent lighting units 102 can be used to create any shape of lighting system, such as one shaped to resemble a letter, number, symbol, logo, object, structure, or the like.

20

Housings 800 can include or be combined to produce three-dimensional configurations, such as made from a plurality of lighting units 102. Linear lighting units 102 can be used to create three-dimensional structures and objects, or to outline existing structures and objects when disposed along the lines of such structures and objects.
25 Many different displays, objects, structures, and works of art can be created using linear lighting units as a medium. Examples include pyramid configurations, building outlines and two-dimensional arrays. Linear units in two-dimensional arrays can be controlled to act as pixels in a lighting show.

30

In embodiments the housing 800 may be a housing for an architectural, theatrical, or entertainment lighting fixture, luminaire, lamp, system or other product. The housing

-53-

800 may be made of a metal, a plastic, a polymer, a ceramic material, glass, an alloy or another suitable material. The housing 800 may be cylindrical, hemispherical, rectangular, square, or another suitable shape. The size of the housing may range from very small to large diameters, depending on the nature of the lighting application. The housing 800 may be configured to resemble a conventional architectural lighting fixture, such as to facilitate installation in proximity to other fixtures, including those that use traditional lighting technologies such as incandescent, fluorescent, halogen, or the like. The housing 800 may be configured to resemble a lamp. The housing 800 may be configured as a spot light, a down light, an up light, a cove light, an alcove light, a sconce, a border light, a wall-washing fixture, an alcove light, an area light, a desk lamp, a chandelier, a ceiling fan light, a marker light, a theatrical light, a moving-head light, a pathway light, a cove light, a recessed light, a track light, a wall fixture, a ceiling fixture, a floor fixture, a circular fixture, a spherical fixture, a square fixture, a rectangular fixture, an accent light, a pendant, a parabolic fixture, a strip light, a soffit light, a valence light, a floodlight, an indirect lighting fixture, a direct lighting fixture, a flood light, a cable light, a swag light, a picture light, a portable luminaire, an island light, a torchiere, a boundary light, a flush or any other kind architectural or theatrical lighting fixture or luminaire.

Housings may also take appropriate shapes for various specialized, industrial, commercial or high performance lighting applications. For example, in an embodiment a miniature system, such as might be suitable for medical or surgical applications or other applications demanding very small light systems 100, can include a substantially flat light shape, such as round, square, triangular or rectangular shapes, as well as non-symmetric shapes such as tapered shapes. In many such embodiments, housing 800 could be generally described as a planar shape with some small amount of depth for components. The housing 800 can be small and round, such as about ten millimeters in diameter (and can be designed with the same or similar configuration at many different scales.) The housing 800 may include a power facility, a mounting facility and an optical facility. The housing 800 and optical facility can be made of metals or plastic materials suitable for medical use.

-54-

Referring to Fig. 10, a housing 800 for a lighting unit 100 may serve as a housing for another object as well, such as a compact 1002, a flashlight 1004, a ball 1008, a mirror 1012, an overhead light 1014, a wand 1010, a traffic light 1020, a mirror 1018, a sign 1022, a toothbrush 1024, a cube 1028 (such as a Lucite cube), a display 1030, a handheld computer 1032, a phone 1034, or a block 1038. Almost any object can be integrated with a lighting unit 102 to provide a controlled lighting feature.

Fig. 11 shows additional housings 800 for lighting units 102, such as blocks 1104, balls 1108, pucks 1110, spheres 1112, and lamps 1114.

Referring to Fig. 11, housings 800 may also take the form of a flexible band 1102, tape or ribbon to allow the user to conform the housing to particular shapes or cavities. Similarly, housings 800 can take the form of a flexible string 1104. Such a band 1102 or string 1104 can be made in various lengths, widths and thicknesses to suit specific demands of applications that benefit from flexible housings 800, such as for shaping to fit body parts or cavities for surgical lighting applications, shaping to fit objects, shaping to fit unusual spaces, or the like. In flexible embodiments it may be advantageous to use thin-form batteries, such as polymer or "paper" batteries for small bands 1102 or strings 1104.

Referring to Fig. 12, lighting units 102 can be disposed in a sign 1204, such as to provide lighting. Combined with diffusers 502, the lighting units 102 can produce an effect similar to neon lights. Signs 1204 can take many different forms, with lighting units 102, housings 800 and diffusers 502 shaped to resemble logos, characters, numbers, symbols, and other signage elements. In embodiments the sign 1204 can be made of light-transmissive materials. Thus, a sign 1204 can glow with light from the lighting units 102, similar to the way a neon light glows. The sign 1204 can be configured in letters, symbols, numbers, or other configurations, either by constructing it that way, or by providing sub-elements that are fit together to form the desired configuration. The light from the lighting units 102 can be white light, other colors of light, or light of

-55-

varying color temperatures. In an embodiment the sign 1204 can be made from a kit that includes various sub-elements, such as curved elements, straight elements, "T" junctions, "V-" and "U-" shaped elements, and the like.

5 In embodiments a housing 800 may be configured as a sphere or ball, so as to produce light in substantially all directions. The ball housing 800 can be made of plastic or glass material that could be transparent for maximum light projection or diffuse to provide softer light output that is less subject to reflections. The ball housing 800 could be very small, such as the size of a marble or a golf ball, so that it is easily managed in
10 environments that require miniature light systems 100, or it could be very large, such as in art, architectural, and entertainment applications. Multiple balls can be used simultaneously to provide additional light. If it is desired to have directional light from a ball lighting system 100, then part of the ball can be made dark.

15 Housings 800 can incorporate lighting units 102 into conventional objects, such as tools, utensils, or other objects. For example, a housing 800 may be shaped into a surgical tool, such as tweezers, forceps, retractors, knives, scalpels, suction tubes, clamps or the like. A lighting unit 102 can be collocated at the end of a tool and provide illumination to the working area of the tool. One of many advantages of this type of tool
20 is the ability to directly illuminate the working area, avoiding the tendency of tools or the hands that use them to obscure the working area. Tools can have onboard batteries or include other power facilities as described herein.

Housings 800 can also be configured as conventional tools with integrated
25 lighting units 102, such as hammers, screw drivers, wrenches (monkey wrenches, socket wrenches and the like), pliers, vise-grips, awls, knives, forks, spoons, wedges, drills, drill bits, saws (circular saws, jigsaws, mitre saws and the like), sledge hammers, shovels, digging tools, plumbing tools, trowels, rakes, axes, hatchets and other tools. As with surgical tools, including the lighting unit 102 as part of the tool itself allows lighting a
30 work area or work piece without the light being obscured by the tool or the user.

-56-

Referring to Fig. 13, a housing may be configured to resemble a conventional MR-type halogen fixture 1300. A rectangular opening 1302 in the housing 800 allows the positioning of a connector that serves as an interface 4904 between a socket into which the housing 800 is positioned and a board 204 that bears the light sources 300, which include a plurality of LEDs. The interface 4904 provides a mechanical, electrical and data connection between the board 204 and the socket into which the housing 800 is placed. In embodiments the fixture 1300 is made of a heat-conducting material, such as metal. The housing 800 may be cast as a single unit or cast in separate halves. In embodiments an additional heat shield 1304 may shield the LEDs from heat that may come from the power/data circuitry. In embodiments a metal mesh may exist between the light sources 300 and the lens 1308. The lens 1308 may be attached by a screw-type cap 1308 with a central space for allowing light to shine from the fixture 1302. In embodiments a side of the lens 1308 may be coated to prevent reflection of radiation back to the light sources 300 to reduce heat in the environment of the light sources 300. The lens 1308 may protect the light sources 300 and electronic components located on the board 204 from damage and prevent a user from touching the electronic components, which could result in electric shock. In embodiments the light sources 300 may be heat-resistant LEDs. The board 204 may be a metal core board for accepting heat from the light sources 300 and trapping the heat away from the light sources 300. The interior of the unit 1300 may be filled with a potting facility for trapping heat away from the light sources 300. The board 204 may be a printed circuit board. In embodiments the housing 800 may include a thermally conductive material, such as a potting material or an adhesive. In embodiments a power/data supply may be on board the fixture 1302.

Referring to Figs. 14a and 14b, a housing 800 may be a linear housing 1402. Referring to Fig. 14a, the housing may include connectors 1404 located at the ends of the linear housing 1402, so that separate modular units of the housing 1402 can be connected end-to-end at a junction 1412 with little spacing in between. The connectors 1404 of Fig. 14b extend from the housing 800. The connectors 1404 can be designed to transmit power and data from one lighting unit 102 to another lighting unit 102 having a similar linear housing 1402. The power and data may be fed through the interior of the lighting

-57-

unit 1402. The top of the housing can include a slot 1408 into which light sources 300 are disposed. The light sources 300 may be high-brightness LEDs. The housing 800 can be fit with a lens 1412 for protecting the light sources 300 or shaping light coming from the light sources 300. The lens 1412 can be provided with a very tight seal, such as to
5 prevent a user from touching the light sources 300 or any of the drive circuitry. In embodiments the housing 1402 may house drive circuitry for a high-voltage embodiment, as described in more detail below and in applications incorporated herein by reference. In embodiments the housing 1402 may include a cover 1414 for covering the connector 1404 if the connector is not in use. The linear housing 1402 can be
10 deployed to produce many different effects in many different environments, as described in connection with other linear embodiments described herein. In one preferred embodiment, lighting units 102 with linear housings 1402 are strung end-to-end in an alcove to light the alcove. In another preferred embodiments, such lighting units 102 with linear housings 1402 are connected end-to-end across the base of a wall or other
15 architectural feature to wash the wall or other feature with light of varying colors.

Referring to Fig. 14c, a cut-through view of the housing 1402 is depicted, showing the lens 1412, circuit board 204, light sources 300 and other elements. An element 1418 can be used to hold down the lens 1412. Fasteners 1424 attach the top part
20 of the housing 1402 to the bottom part of the housing 1402. Lines 1420, 1422 for power and data run through the housing 1402. In embodiments a metal plate 1428 conducts heat away from the board 204 and the light sources 300. In embodiments the interior space 1430 may be filled with potting material to trap heat away from the light sources 300. Gaskets 1432 can connect the inner part of the housing 1402 to the outer part. The
25 housing 1402 may include substantial heat-conducting mass, to trap heat away from the light sources 300. The housing 1402 may include a board 1434 with a power facility, such as a power-on-board power facility. Cooling fins 1438 may provide additional cooling for the housing 1402.

30 Fig. 14d shows a side cut view of the housing 1402. The board 204 with the light sources 300 is disposed in the housing 1402. The power-on-board power facility 1434 is

-58-

disposed in the housing 1402. A power bus 1440 carries power to the power-on-board power facility 1434.

In embodiments a light source 300 may be equipped with a primary optical facility 1700, such as a lens, diode package, or phosphor for shaping, spreading or otherwise optically operating on photons that exit the semiconductor in an LED. For example, a phosphor may be used to convert UV or blue radiation coming out of a light source 300 into broader band illumination, such as white illumination. Primary optical facilities may include packages such as those used for one-watt, three-watt, five-watt and power packages offered by manufacturers such as LumiLeds, Nichia, Cree and Osram-Opto.

In one embodiment, the lighting unit 102 or a light source 300 of Figs. 1 and 2 may include and/or be coupled to a power facility 1800. In various aspects, examples of power facilities 1800 include, but are not limited to, AC power sources, DC power sources, batteries, solar-based power sources, thermoelectric or mechanical-based power sources and the like. Additionally, in one aspect, the power facility 1800 may include or be associated with one or more power conversion devices that convert power received by an external power source to a form suitable for operation of the lighting unit 102.

Light sources 300 have varying power requirements. Accordingly, lighting units 102 may be provided with dedicated power supplies that take power from power lines and convert it to power suitable for running a lighting unit 102. Power supplies may be separate from lighting units 102 or may be incorporated on-board the lighting units 102 in power-on-board configurations. Power supplies may power multiple lighting units 102 or a single lighting unit 102. In embodiments power supplies may provide low-voltage output or high-voltage output. Power supplies may take line voltage or may take power input that is interrupted or modified by other devices, such as user interfaces 4908, such as switches, dials, sliders, dimmers, and the like.

-59-

In embodiments a line voltage power supply is integrated into a lighting system 100 and a power line carrier (PLC) serves as a power facility 1800 and as a control facility 3500 for delivering data to the lighting units 102 in the lighting system 100 over the power line. In other cases a lighting system 100 ties into existing power systems (120 or 220VAC), and the data is separately wired or provided through wireless.

A power facility 1800 may include a battery, such as a watch-style battery, such as Lithium, Alkaline, Silver-Zinc, Nickel-Cadmium, Nickel metal hydride, Lithium ion and others. The power facility 1800 may include a thin-form polymer battery that has the advantage of being very low profile and flexible, which can be useful for lighting unit configurations in flexible forms such as ribbons and tape. A power facility 1800 may also comprise a fuel cell, photovoltaic cell, solar cell or similar energy-producing facility. A power facility 1800 may be a supercapacitor, a large-value capacitor that can store much more energy than a conventional capacitor. Charging can be accomplished externally through electrical contacts and the lighting device can be reused. A power facility 1800 can include an inductive charging facility. An inductive charging surface can be brought in proximity to a lighting unit 102 to charge an onboard power source, allowing, for example, a housing 800 to be sealed to keep out moisture and contaminants.

Battery technologies typically generate power at specific voltage levels such as 1.2 or 1.5V DC. LED light sources 300, however, typically require forward voltages ranging from around 2VDC to 3.2VDC. As a result batteries may be put in series to achieve the required voltage, or a boost converter may be used to raise the voltage.

It is also possible to use natural energy sources as a power facility 1800, such as solar power, the body's own heat, mechanical power generation, the body's electrical field, wind power, water power, or the like.

Referring to Fig. 15, in embodiments it is desirable to supply power factor correction (PFC) to power for a lighting unit 102. In a power-factor-corrected lighting system 102, a line interference filter and rectifier 1802 may be used to remove

-60-

interference from the incoming line power and to rectify the power. The rectified power can be delivered to a power factor corrector 1804 that operates under control of a control circuit 1810 to provide power factor correction, which is in turn used to provide a high voltage direct current output 1808 to the lighting unit 102. Many embodiments of power factor correction systems can be used as alternatives to the embodiment of Fig. 15.

Fig. 16a shows an embodiment of a lighting system 100 with a power factor correction facility 1804. The line filter and rectifier 1802 takes power from the line, filters and rectifies the power, and supplies it to the power factor correction facility 1804.

The embodiment of Fig. 16a includes a DC to DC converter 1812 that converts the output of the power factor correction facility 1804 to, for example, twenty-four volt power for delivery via a bus. The bus also carries data from a data converter 1904, which carries a control signal for the lighting units 102 that are attached to the bus that carries both the power and the data. In the embodiment of Fig. 16b, the DC to DC converter 1812 is disposed locally at each lighting unit 102, rather than in a central power supply as in Fig. 16a.

Fig. 17 shows an embodiment where the power factor correction facility 1804 and DC to DC converter 1812 are integrated into a single stage power factor correction/DC to DC converter facility 1908 that is integrated with the lighting unit 102, rather than being contained in a separate power supply. The alternating current line power is delivered to a high-voltage three wire power/data bus 1910 that also carries input from a data converter 1904 that carries control signals for the lighting unit 102. Power factor correction and conversion to DC output voltages suitable for light sources 300 such as LEDs occurs at the lighting units 102. Unlike conventional power supplies where power factor correction is absent or present only in a separate power supply, the local power factor correction/DC to DC converter 1908 can take line voltage and correct it to an appropriate input for a LED light source 300 even if the line voltage has degraded substantially after a long run of wire. The configuration of Fig. 17 and other alternative embodiments that supply power factor correction and voltage conversion on board allow lighting units 102 to be configured in long strings over very large geometries, without the

-61-

need to install separate power supplies for each lighting unit 102. Accordingly, it is one preferred embodiment of a power supply for disposing lighting units 102 on building exteriors and other large environments where it is inconvenient to install or maintain many separate power supplies.

5

In embodiments it is desirable to provide power and data over the same line. Referring to Fig. 18, a multiplexer 1850 takes a data input and a direct current power input and combines them to provide a combined power and data signal. 1852.

10 Semiconductor devices like LED light sources 300 can be damaged by heat; accordingly, a system 100 may include a thermal facility 2500 for removing heat from a lighting unit 102. Referring to Fig. 19, the thermal facility 2500 may be any facility for managing the flow of heat, such as a convection facility 2700, such as a fan 2702 or similar mechanism for providing air flow to the lighting unit 102, a pump or similar
15 facility for providing flow of a heat-conducting fluid, a vent 2704 for allowing flow of air, or any other kind of convection facility 2700. A fan 2702 or other convection facility 2700 can be under control of a processor 3600 and a temperature sensor such as a thermostat to provide cooling when necessary and to remain off when not necessary.

20 The thermal facility 2500 can also be a conduction facility 2600, such as a conducting plate or pad of metal, alloy, or other heat-conducting material, a gap pad 2602 between a board 204 bearing light sources 300 and another facility, a thermal conduction path between heat-producing elements such as light sources 300 and circuit elements, or a thermal potting facility, such as a polymer for coating heat-producing
25 elements to receive and trap heat away from the light sources 300. The thermal facility 2500 may be a radiation facility 2800 for allowing heat to radiate away from a lighting unit 102. A fluid thermal facility 2900 can permit flow of a liquid or gas to carry heat away from a lighting unit 102. The fluid may be water, a chlorofluorocarbon, a coolant, or the like. In a preferred embodiment a conductive plate is aluminum or copper. In
30 embodiments a thermal conduction path 2720 conducts heat from a circuit board 204

-62-

bearing light sources 300 to a housing 800, so that the housing 800 radiates heat away from the lighting unit 102.

Referring to Fig. 20, a mechanical interface 3200 may be provided for connecting
5 a lighting unit 102 or light source 300 mechanically to a platform, housing 800,
mounting, board, other lighting unit 102, or other product or system. In embodiments
the mechanical interface 3200 may be a modular interface for removeably and
replaceably connecting a lighting unit 102 to another lighting unit 102 or to a board 204.
A board 204 may include a lighting unit 102, or it may include a power facility for a
10 lighting unit 102.

In embodiments the modular interface 3202 comprises a board 204 with a light
source 300 on one side and drive circuit elements on the other side, or two boards 204
with the respective elements on opposites sides and the boards 204 coupled together.
15 The modular interface 3202 may be designed to allow removal or replacement of a
lighting unit 102, either in the user environment of the lighting unit 102 or at the factory.
In embodiments a lighting unit 102 has a mechanical retrofit interface 3300 for allowing
it to fit the housing of a traditional lighting source, such as a halogen bulb 3302. In
embodiments the modular interface 3200 is designed to allow multiple lighting units 102
20 to fit together, such as a modular block 3204 with teeth, slots, and other connectors that
allow lighting units 102 to serve as building blocks for larger systems of lighting units
102.

In embodiments the retrofit interface 3300 allows the lighting unit 102 to retrofit
25 into the mechanical structure of a traditional lighting source, such as screw for an
Edison-mount socket, pins for a Halogen socket, ballasts for a fluorescent fixture, or the
like.

In embodiments the mechanical interface is a socket interface 3400, such as to
30 allow the lighting unit 102 to fit into any conventional type of socket, which in
embodiments may be a socket equipped with a control facility 3500, i.e., a smart socket.

-63-

In embodiments the mechanical interface 3200 is a circuit board 204 on which a plurality of light sources 300 are disposed. The board 204 can be configured to fit into a particular type of housing 800, such as any of the housings 800 described above. In
5 embodiments the board 204 may be moveably positioned relative to the position of the housing 800. A control facility may adjust the position of the board 204.

A kit may be provided for producing an illumination system, which may include light sources 300, components for a control facility 3500, and instructions for using the
10 control facility components to control the light sources 300 to produce an illumination effect.

In embodiments a control facility 3500 for a light source 300 may be disposed on a second board 204, so that the control facility 3500 can be moveably positioned relative
15 to the board 204 on which the light sources 300 are disposed. In embodiments the board for the control facility 3500 and the board 204 for the light sources 300 are configured to mechanically connect in a modular way, permitting removal and replacement of one board 204 relative to the other, whether during manufacturing or in the field.

A developer's kit may be provided including light sources 300, a circuit board 204 and instructions for integrating the board 204 into a housing 800. A board 204 with light sources 300 may be provided as a component for a manufacturer of a lighting
20 system 100. The component may further include a chip, firmware, and instructions or specifications for configuring the system into a lighting system 100.

25

In embodiments a board 204 carrying LEDs may be configured to fit into an architectural lighting fixture housing 800 or other housing 800 as described above.

In embodiments, a light source 300 can be configured with an off-axis mounting
30 facility or a light shade that selectively allows light to shine through in certain areas and not in others. These techniques can be used to reduce glare and light shining directly into

-64-

the eyes of a user of the lighting unit 102. Snap-on lenses can be used atop the light-emitting portion to allow for a much wider selection of light patterns and optical needs. In embodiments a disk-shaped light source 300 emits light in one off-axis direction. The light can then be rotated about the center axis to direct the light in a desired direction.

- 5 The device may be simply picked up, rotated, and placed back down using the fastening means such as magnetic or clamp (see below for more fastening options) or may simply incorporate a rotational mechanism.

Referring to Fig. 21, in embodiments the mechanical interface 3200 may connect
10 light sources 300 to fiber bundles 2102 to create flexible lighting units 102. A lighting unit 102 can be configured to be incorporated directly in a tool 2104, so that the fiber transports the light to another part of the tool 2104. This would allow the light source 300 to be separated from the 'working' end of the tool 2104 but still provide the lighting unit 102 without external cabling and with only a short efficient length of fiber. An
15 electro-luminescent panel can be used wherein the power is supplied via onboard power in the form of a battery or a cable or wire to an off board source.

A mechanical interface 3200 may include facilities for fastening lighting units 102 or light sources 300, such as to platforms, tools, housing or the like. Embodiments
20 include a magnetic fastening facility. In embodiments a lighting unit 102 is clamped or screwed into a tool or instrument. For example, a screw-type clamp 2108 can be used to attach a lighting unit 102 to another surface. A toggle-type clamp can be used, such as De-Sta-Co style clamps as used in the surgical field. A clip or snap-on facility can be used to attach a lighting unit 102 and allow flexing elements. A flexible clip 2110 can be
25 added to the back of a lighting device 102 to make it easy to attach to another surface. A spring-clip, similar to a binder clip, can be attached to the back of a lighting unit 102. A flexing element can provide friction when placed on another surface. Fasteners can include a spring-hinge mechanism, string, wire, Ty-wraps, hook and loop fastener 2114, adhesives or the like. Fastening materials include bone wax 2112; a beeswax compound
30 (sometimes mixed with Vaseline), which can be hand, molded, and can also be used for holding the lighting device 102. The exterior of the lighting device 102 can be textured

-65-

to provide grip and holding power to facilitate the fastening. Tapes, such as surgical DuoPlas tape from Sterion, are another example of materials that can be used to fasten the light to tools, instruments, and drapes or directly to the patient.

5 Mechanical interfaces 3200 configured as boards 204 on which light sources 300 are disposed can take many shapes, including shapes that allow the boards 204 to be used as elements, such as tiles, to make up larger structures. Thus, a board 204 can be a triangle 2118, square 2120, hexagon, or other element that can serve as a subunit of a larger pattern, such as a two-dimensional planar pattern or a three-dimensional object,
10 such as a regular polyhedron or irregular object.

Referring to Fig. 22a, boards 204 can provide a mechanical and electrical connection 2202, such as with matching tabs and spaces that fit into each other to hold the boards 204 together. Such boards can build large structures. For example, a large
15 number of triangular boards 2118 can be arranged together to form a substantially spherical configuration 2204 that resembles a large ball, with individual lighting units 102 distributed about the entire perimeter to shine light in substantially all directions from the ball sphere 2204.

20 In embodiments, the boards 204 may be used as interlocking, substantially similar, repeated subassemblies whose interlocking mechanism can provide both mechanical strength and electrical connectivity. In embodiments the geometry of interlocking repeated subassemblies enable accurate and precise positioning of light sources 300. The interlocking assemblies product displays of various physical shapes,
25 and lighting units 100 can be individually addressed and controlled to achieve appearances that differ from varying points of view.

When considering the question of how to subdivide the volume of a space into a collection of illuminated areas, it is immediately evident that many of the desired
30 subdivision schemes will have a significant degree of regularity and symmetry. For example, a relatively small, roughly spherical luminaire in a large room would naturally

-66-

lend itself to being constructed from a set of narrow- to medium-angle light emitters that point radially outward from the center of the sphere. Similarly, a roughly cylindrical luminaire might consist of a set of linear emitters pointing radially outward, or a half-cylinder might consist of a set of linear emitters pointing inward, whose beams cross as they exit the fixture.

In any case, for reasons of both manufacturability and simplicity of design, it is desirable to utilize a light source 300 with a specific shape, size and feature set that can be repeated many times throughout the lighting unit 100. Such a lighting unit 100 might be appreciably planar, so that it could touch other such lighting units 100 edge to edge, or a lighting unit 100 might occupy a certain volume, so that it could touch other such lighting units 100 surface to surface or face to face. This lighting unit 100 could be considered a "tile," and a number of these units in proximity to each other, touching edge to edge or face to face, would constitute a tessellation. The tessellation need not be regular and need not repeat, and the tiles need not all be identical.

In embodiments boards 204 formed into tiles can be assembled into a tessellation. Since edges or faces of the boards 204 or tiles will be in contact with one another, and since the geometric possibilities for the set of interfaces between tiles is strictly limited by the parameters of the tiles, it becomes evident that these points of contact are eminently suited for both the mechanical fastening required to hold the tessellation together and for the electrical connections required to power the light source in each tile. Thus, a properly designed tile will incorporate a fastening scheme such that one tile's edge can be securely attached to another tile's edge, and/or such that one tile's face can be securely attached to another tile's face. Also, a properly designed tile would incorporate an electrical interconnection mechanism on an edge and/or face such that one tile's edge or face can provide electrical signals to, or obtain electrical signals from, a mating tile. It should be noted that, geometrically speaking, sets of interconnected units such as has been described here generally obtain very high strength via the distribution of loads and stresses throughout the structure as a whole. As a consequence, properly

-67-

designed tiles, assembled with each other, may obviate the need for any auxiliary framework, superstructure or backbone to support the structure as a whole. Likewise, the tile-to-tile electrical connections may obviate the need for any auxiliary wiring. The shape and functionality of a lighting unit 100 constructed of these tiles can therefore be
5 an emergent property of the design of the tiles themselves.

Furthermore, as a geometric consequence of the tessellation of tiles with specific geometric properties, the absolute position and orientation of each tile in three-dimensional space can be represented mathematically as a function of the tile's shape;
10 therefore it is equally possible to choose a desired mathematical representation for the geometry of the lighting unit 100 and work in the other direction to search for tile shapes from which that structure can be made.

The present invention exploits this property that simple tiles with simple
15 geometry can be assembled into complex structures with complex geometry. By way of example: An icosahedron can be constructed from twenty edge-connected triangles, each with sides measuring exactly one inch. The number one is a rational number, and one inch is easy to measure and fabricate, but when interconnected the vertices of these triangles have irrational coordinates in three-space and tiles' faces meet at edges whose
20 fastening angle is an irrational number. Were one to fabricate an icosahedron from a block of metal, one would have to invest substantial effort to cut all the faces with the desired degree of precision, but were one to construct an icosahedron from twenty identical triangles, very high precision would be obtained with the trivial step of measuring an equilateral triangle. In relation to a luminaire, one therefore is able to
25 position and orient each tile's light source with high precision and accuracy, simply by ensuring that one particular kind of tile can be reliably, repeatably manufactured and reliably interconnected to its neighbors.

-68-

Thus far, given examples have related to the use of light sources 300 that are intended to project light from the lighting unit 100 for the purposes of illuminating the surrounding space. But the present invention is equally relevant to the use of light sources that are intended to be viewed directly. A tile could have one or many light sources 300 on it, arranged in some pattern or design, so that when interconnected with other tiles a larger pattern emerges. Rectangular, planar matrix displays consisting of orthogonal rows and columns of pixels are commonplace, but displays with non-orthogonal sets of pixels and, in particular, three-dimensional displays are rare. Again, the emergent pattern may have a degree of complexity and precision that is substantially in excess of the complexity and precision inherent in a single tile.

Finally, if a display is three-dimensional, its appearance will vary depending on where a viewer is standing. A roughly spherical display would appear spherical-shaped from any viewpoint, but the pixels on one section of the sphere need not behave the same way as pixels elsewhere on the sphere. Hence, two viewers looking at the same sphere from different angles will see different patterns on the display.

Referring to Fig. 22b, in embodiments the board 204 may consist of a rectangular board 204, with an array 2208 of light sources 300. In the embodiment depicted in Fig. 22b, the array is a six-by-six array on a square board 204 with six-inch sides. The array 2208 can have any number of light sources 300 and take on any other dimensions. The light sources may consist of miniature groups of LEDs, such as red, green, blue, white or other colors of LEDs. In embodiments each light source 300 is comprised of a triad of red, green and blue surface mount LEDs. The square array makes it very convenient for the array 2208 to be placed side by side with other boards 204 containing similar arrays 2208, so that effects can be generated across multiple arrays 2208, such as an extended system covering a wall or the outside of a building. That is, the arrays 2208 can serve as modular components of larger lighting systems. To facilitate rapid installation, the board 204 may have a plurality of pre-fabricated screw holes 2210 that make it very convenient to attach the board 204 to a wall or other mounting area. In embodiments the board 204

-69-

is provided with a protective cover 2212, such as a plastic cover to protect the board from damage and to prevent a user from touching electrical connections on the board 204. The cover 2212 may include spaces 2214, so that a viewer can see the light sources 300 directly without having light diffused through the cover 2212. In other embodiments the cover 2212 may be a light transmitting cover or a light diffusing cover.

Referring to Fig. 22c, in another embodiment the array 2208 of light sources 300 may be a three-by-three array, less dense than the six-by-six array of Fig. 22b, but including similar elements, such as the board 204 (again a six-inch by six-inch board 204), the cover 2212, the screw holes 2210 and the spaces 2214 through which the viewer can directly see the light sources 300. Again the light sources 300 may consist of various colors of LED, such as a trio of red, green and blue surface mount LEDs.

Fig. 22d shows the back of a board 204 such as the rectangular array 2208 boards 204 described in connection with Figs. 22b and 22c. The board 204 includes a jack 2218 for taking in power and data from a source and a jack 2220 for sending power and data out. In embodiments the jacks 2218, 2220 allow the board 204 to be aligned in series with other boards 204, where data from a central controller is passed from board-to-board by the jacks 2218, 2220. In embodiments each group of light sources 300 in the array 2208 may be provided with a processor 3600, such as an ASIC, for handling lighting control signals for the light sources 300. In embodiments the ASICs 3600 are disposed in series and are controlled by a serial control facility such as described herein, where each ASIC takes a data stream, responds to the first unmodified byte, modifies the byte to which it responds, and sends the modified data stream to the next ASIC. The ASICs 3600 on the back of the board 204 may be strung in an array, such as the six-by-six array 2208 or the three-by-three array 2208. In embodiments each of the ASICs 3600 is disposed along with a resistor and a capacitor on the back of the board 204. The board 204 may also contain an additional ASIC 2230, such as to allow a central controller to identify the particular type of board 204 on which the ASICs are disposed, such as to identify the board 204 as a six-by-six or three-by-three array. The board 204 may also include extrusions 2228 from the screw holes 2210 of the board. The extrusions 2228

-70-

guide the screws that attached the board 204 to a surface, and they also provide an offset between the back of the board 204 and the surface, so that the ASICs 3600 or other components are not crushed when the board 204 is attached to the surface. Corner extrusions 2224 provide an offset at the corners of the board 204 as well.

5

In embodiments the cover 2212 may be fitted with lenses, diffusers or other optical facilities 400 that shape the light coming from the light sources 300 that make up the arrays 2208, such as to increase the viewing angle of light sources 300.

10

In embodiments the lighting units 100 may include a dipline style mounting panel that allows units to be placed anywhere on a surface. The boards 204 may include integrated hash marks for aligning units 100 during installation. In embodiments boards 204 may have an integrated laser level to facilitate accurate installation. In this embodiment a layered surface of conductors such as Dipline-style (Dipline is a

15 trademarked layered conductive mounting material) surface material is used to allow units to be placed anywhere on surface by inserting of modular attached pin connectors to be pushed through the surface of the materials to make contact with selected conductive layers within the surface.

20

Fig. 14 showed a mechanical interface 3200 for connecting two linear lighting units 102 end-to-end. Another mechanical interface 3200 is seen in Fig. 23, where cables 2322 exit a portal 2324 in the housing 800 and enter a similar portal 2324 in the housing 800 of the next linear unit 102, so that the two units 102 can be placed end-to-end. A protective cover 2320 can cover the cables 2322 between the units 102. The

25 cables 2322 can carry power and data between the units 102.

In embodiments, mechanical interfaces 3200 can include thermal facilities 2500 such as those described above as well as facilities for delivering power and data.

30

A control facility 3500 may produce a signal for instructing a light system 100 lighting unit 102 to produce a desired light output, such as a mixture of light from

-71-

different light sources 300. Control facilities can be local to a lighting unit 102 or remote from the lighting unit 102. Multiple lighting units 102 can be linked to central control facilities 3500 or can have local control facilities 3500. Control facilities can use a wide range of data protocols, ranging from simple switches for “on” and “off” capabilities to
5 complex data protocols such as Ethernet and DMX.

Referring to Fig. 24a, a control facility 3500 may include drive hardware 3800 for delivering controlled current to one or more light sources 300. Referring to Figs. 24a and 24b, control signals from a control facility 3500, such as a central data source, are
10 used by a processor 3600 that controls the drive hardware 3800, causing current to be delivered to the light sources 300 in the desired intensities and durations, often in very rapid pulses of current, such as in pulse width modulation or pulse amplitude modulation, or combinations of them, as described below. Two examples of drive hardware 3800 circuits are shown in Fig. 24, but many alternative embodiments are
15 possible, including those described in the patent incorporated by reference herein. Referring to Fig. 24c in embodiments power from a power facility 1800 and data from a control facility 3500 are delivered together as an input 2402. A dipswitch 2408 can be used to provide a processor 3600 with a unique address, so that the lighting unit 102 responds to control signals intended for that particular lighting unit 102. The processor
20 3600 reads the power/data input and drives the drive hardware 3800 to provide current to the light sources 300.

In embodiments the control facility 3500 includes the processor 3600. “Processor” or “controller” describes various apparatus relating to the operation of one
25 or more light sources. A processor or controller can be implemented in numerous ways, such as with dedicated hardware, using one or more microprocessors that are programmed using software (e.g., microcode or firmware) to perform the various functions discussed herein, or as a combination of dedicated hardware to perform some functions and programmed microprocessors and associated circuitry to perform other
30 functions. The terms “program” or “computer program” are used herein in a generic sense to refer to any type of computer code (e.g., software or microcode) that can be

-72-

employed to program one or more processors or controllers, including by retrieval of stored sequences of instructions.

In particular, in a networked lighting system environment, as discussed in greater
5 detail further below (e.g., in connection with Fig. 2), as data is communicated via the
network, the processor 3600 of each lighting unit coupled to the network may be
configured to be responsive to particular data (e.g., lighting control commands) that
pertain to it (e.g., in some cases, as dictated by the respective identifiers of the networked
lighting units). Once a given processor identifies particular data intended for it, it may
10 read the data and, for example, change the lighting conditions produced by its light
sources according to the received data (e.g., by generating appropriate control signals to
the light sources). In one aspect, a data facility 3700 of each lighting unit 102 coupled to
the network may be loaded, for example, with a table of lighting control signals that
correspond with data the processor 3600 receives. Once the processor 3600 receives data
15 from the network, the processor may consult the table to select the control signals that
correspond to the received data, and control the light sources of the lighting unit
accordingly.

In one aspect of this embodiment, the processor 3600 of a given lighting unit,
20 whether or not coupled to a network, may be configured to interpret lighting
instructions/data that are received in a DMX protocol (as discussed, for example, in U.S.
Patents 6,016,038 and 6,211,626), which is a lighting command protocol conventionally
employed in the lighting industry for some programmable lighting applications.
However, it should be appreciated that lighting units suitable for purposes of the present
25 invention are not limited in this respect, as lighting units according to various
embodiments may be configured to be responsive to other types of communication
protocols so as to control their respective light sources.

In other embodiments the processor 3600 may be an application specific
30 integrated circuit, such as one configured to respond to instructions according to a
protocol, such as the DMX protocol, Ethernet protocols, or serial addressing protocols

-73-

where each ASIC responds to control instructions directed to it, based on the position of the ASIC in a string of similar ASICs.

In various implementations, a processor or controller may be associated with a data facility 3700, which can comprise one or more storage media (generically referred to herein as “memory,” e.g., volatile and non-volatile computer memory such as RAM, PROM, EPROM, and EEPROM, floppy disks, compact disks, optical disks, magnetic tape, etc.). In some implementations, the storage media may be encoded with one or more programs that, when executed on one or more processors and/or controllers, perform at least some of the functions discussed herein. Various storage media may be fixed within a processor or controller or may be transportable, such that the one or more programs stored thereon can be loaded into a processor or controller so as to implement various aspects of the present invention discussed herein.

In embodiments the data storage facility 3700 stores information relating to control of a lighting unit 102. For example, the data storage facility may be memory employed to store one or more lighting programs for execution by the processor 3600 (e.g., to generate one or more control signals for the light sources), as well as various types of data useful for generating variable color radiation (e.g., calibration information, information relating to techniques for driving light sources 300, information relating to addresses for lighting units 102, information relating to effects run on lighting units 102, and may other purposes as discussed further herein). The memory also may store one or more particular identifiers (e.g., a serial number, an address, etc.) that may be used either locally or on a system level to identify the lighting unit 102. In various embodiments, such identifiers may be pre-programmed by a manufacturer or alterable by the manufacturer, for example, and may be either alterable or non-alterable thereafter (e.g., via some type of user interface located on the lighting unit, via one or more data or control signals received by the lighting unit, etc.). Alternatively, such identifiers may be determined at the time of initial use of the lighting unit in the field, and again may be alterable or non-alterable thereafter. The data storage facility 3700 may also be a disk, diskette, compact disk, random access memory, read only memory, SRAM, DRAM,

-74-

database, data mart, data repository, cache, queue, or other facility for storing data, such as control instructions for a control facility 3500 for a lighting unit 102. Data storage may occur locally with the lighting unit, in a socket or housing 800, or remotely, such as on a server or in a remote database. In embodiments the data storage facility 3700
5 comprises a player that stores shows that can be triggered through a simple interface.

The drive facility 3800 may include drive hardware 3802 for driving one or more light sources 300. In embodiments the drive hardware 3802 comprises a current sink, such as a switch 3900, such as for turning on the current to a light source 300. In
10 embodiments the switch 3900 is under control of the processor 3600, so that the switch 3900 can turn on or off in response to control signals. In embodiments the switch turns on and off in rapid pulses, such as in pulse width modulation of the current to the LEDs, which results in changes in the apparent intensity of the LED, based on the percentage of the duty cycle of the pulse width modulation technique during which the switch is turned
15 on.

The drive hardware 3802 may include a voltage regulator 4000 for controlling voltage to a light source, such as to vary the intensity of the light coming from the light source 300.
20

The drive hardware 3802 may include a feed-forward drive circuit 4100 such as described in the patent applications incorporated herein by reference.

The drive hardware 3802 may include an inductive loop drive circuit 4200 such
25 as in the patent applications incorporated herein by reference.

Various embodiments of the present invention are directed generally to methods and apparatus for providing and controlling power to at least some types of loads, wherein overall power efficiency typically is improved and functional redundancy of
30 components is significantly reduced as compared to conventional arrangements. In different aspects, implementations of methods and apparatus according to various

-75-

embodiments of the invention generally involve significantly streamlined circuits having fewer components, higher overall power efficiencies, and smaller space requirements.

In some embodiments, a controlled predetermined power is provided to a load without requiring any feedback information from the load (i.e., without monitoring load voltage and/or current). Furthermore, in one aspect of these embodiments, no regulation of load voltage and/or load current is required. In another aspect of such embodiments in which feedback is not required, isolation components typically employed between a DC output voltage of a DC-DC converter (e.g., the load supply voltage) and a source of power derived from an AC line voltage (e.g., a high DC voltage input to the DC-DC converter) in some cases may be eliminated, thereby reducing the number of required circuit components. In yet another aspect, eliminating the need for a feedback loop generally increases circuit speed and avoids potentially challenging issues relating to feedback circuit stability.

Based on the foregoing concepts, one embodiment of the present invention is directed to a “feed-forward” driver for an LED-based light source. Such a feed-forward driver combines the functionality of a DC-DC converter and a light source controller, and is configured to control the intensity of light generated by the light source based on modulating the average power delivered to the light source in a given time period, without monitoring or regulating the voltage or current provided to the light source. In one aspect of this embodiment, the feed-forward driver is configured to store energy to and release energy from an energy transfer device using a “discontinuous mode” switching operation. This type of switching operation facilitates the transfer of a predictable quantum of energy per switching cycle, and hence a predictable controlled power delivery to the light source.

In embodiments the drive hardware 3802 includes at least one energy transfer element to store input energy based on an applied input voltage and to provide output energy to a load at an output voltage. The drive hardware 3802 may include at least one switch coupled to the at least one energy transfer element to control at least the input

-76-

energy stored to the at least one energy transfer element and at least one switch controller configured to control the at least one switch, wherein the at least one switch controller does not receive any feedback information relating to the load to control the at least one switch.

5

As shown in Fig. 1, the lighting unit 102 also may include the processor 3600 that is configured to output one or more control signals to drive the light sources 300 so as to generate various apparent intensities of light from the light sources. For example, in one implementation, the processor 3600 may be configured to output at least one control
10 signal for each light source so as to independently control the intensity of light generated by each light source. Some examples of control signals that may be generated by the processor to control the light sources include, but are not limited to, pulse modulated signals, pulse width modulated signals (PWM), pulse amplitude modulated signals (PAM), pulse displacement modulated signals, analog control signals (e.g., current
15 control signals, voltage control signals), combinations and/or modulations of the foregoing signals, or other control signals. In one aspect, the processor 3600 may control other dedicated circuitry that in turn controls the light sources so as to vary their respective intensities.

20 Lighting systems in accordance with this specification can operate light sources 300 such as LEDs in an efficient manner. Typical LED performance characteristics depend on the amount of current drawn by the LED. The optimal efficacy may be obtained at a lower current than the level where maximum brightness occurs. LEDs are typically driven well above their most efficient operating current to increase the
25 brightness delivered by the LED while maintaining a reasonable life expectancy. As a result, increased efficacy can be provided when the maximum current value of the PWM signal may be variable. For example, if the desired light output is less than the maximum required output the current maximum and/or the PWM signal width may be reduced. This may result in pulse amplitude modulation (PAM), for example; however,
30 the width and amplitude of the current used to drive the LED may be varied to optimize the LED performance. In an embodiment, a lighting system may also be adapted to

-77-

provide only amplitude control of the current through the LED. While many of the embodiments provided herein describe the use of PWM and PAM to drive the LEDs, one skilled in the art would appreciate that there are many techniques to accomplish the LED control described herein and, as such, the scope of the present invention is not limited by any one control technique. In embodiments, it is possible to use other techniques, such as pulse frequency modulation (PFM), or pulse displacement modulation (PDM), such as in combination with either or both of PWM and PAM.

Pulse width modulation (PWM) involves supplying a substantially constant current to the LEDs for particular periods of time. The shorter the time, or pulse-width, the less brightness an observer will observe in the resulting light. The human eye integrates the light it receives over a period of time and, even though the current through the LED may generate the same light level regardless of pulse duration, the eye will perceive short pulses as “dimmer” than longer pulses. The PWM technique is considered one of the preferred techniques for driving LEDs, although the present invention is not limited to such control techniques. When two or more colored LEDs are provided in a lighting system, the colors may be mixed and many variations of colors can be generated by changing the intensity, or perceived intensity, of the LEDs. In an embodiment, three colors of LEDs are presented (e.g., red, green and blue) and each of the colors is driven with PWM to vary its apparent intensity. This system allows for the generation of millions of colors (e.g., 16.7 million colors when 8-bit control is used on each of the PWM channels).

In an embodiment the LEDs are modulated with PWM as well as modulating the amplitude of the current driving the LEDs (Pulse Amplitude Modulation, or PAM). LED efficiency as a function of the input current increases to a maximum followed by decreasing efficiency. Typically, LEDs are driven at a current level beyond maximum efficiency to attain greater brightness while maintaining acceptable life expectancy. The objective is typically to maximize the light output from the LED while maintaining an acceptable lifetime. In an embodiment, the LEDs may be driven with a lower current maximum when lower intensities are desired. PWM may still be used, but the maximum

-78-

current intensity may also be varied depending on the desired light output. For example, to decrease the intensity of the light output from a maximum operational point, the amplitude of the current may be decreased until the maximum efficiency is achieved. If further reductions in the LED brightness are desired the PWM activation may be reduced to reduce the apparent brightness.

One issue that may arise in connection with controlling multiple light sources in the lighting unit 102, and controlling multiple lighting units 102 in a lighting system relates to potentially perceptible differences in light output between substantially similar light sources. For example, given two virtually identical light sources being driven by respective identical control signals, the actual intensity of light output by each light source may be perceptibly different. Such a difference in light output may be attributed to various factors including, for example, slight manufacturing differences between the light sources, normal wear and tear over time of the light sources that may differently alter the respective spectrums of the generated radiation, etc. For purposes of the present discussion, light sources for which a particular relationship between a control signal and resulting intensity are not known are referred to as "uncalibrated" light sources.

The use of one or more uncalibrated light sources in the lighting unit 102 may result in generation of light having an unpredictable, or "uncalibrated," color or color temperature. For example, consider a first lighting unit including a first uncalibrated red light source and a first uncalibrated blue light source, each controlled by a corresponding control signal having an adjustable parameter in a range of from zero to 255 (0-255). For purposes of this example, if the red control signal is set to zero, blue light is generated, whereas if the blue control signal is set to zero, red light is generated. However, if both control signals are varied from non-zero values, a variety of perceptibly different colors may be produced (e.g., in this example, at very least, many different shades of purple are possible). In particular, perhaps a particular desired color (e.g., lavender) is given by a red control signal having a value of 125 and a blue control signal having a value of 200.

30

-79-

Now consider a second lighting unit including a second uncalibrated red light source substantially similar to the first uncalibrated red light source of the first lighting unit, and a second uncalibrated blue light source substantially similar to the first uncalibrated blue light source of the first lighting unit. As discussed above, even if both of the uncalibrated red light sources are driven by respective identical control signals, the actual intensity of light output by each red light source may be perceptibly different. Similarly, even if both of the uncalibrated blue light sources are driven by respective identical control signals, the actual intensity of light output by each blue light source may be perceptibly different.

With the foregoing in mind, it should be appreciated that if multiple uncalibrated light sources are used in combination in lighting units to produce a mixed colored light as discussed above, the observed color (or color temperature) of light produced by different lighting units under identical control conditions may be perceivably different.

Specifically, consider again the “lavender” example above; the “first lavender” produced by the first lighting unit with a red control signal of 125 and a blue control signal of 200 indeed may be perceptibly different than a “second lavender” produced by the second lighting unit with a red control signal of 125 and a blue control signal of 200. More generally, the first and second lighting units generate uncalibrated colors by virtue of their uncalibrated light sources.

In view of the foregoing, in one embodiment of the present invention, the lighting unit 102 includes a calibration facility to facilitate the generation of light having a calibrated (e.g., predictable, reproducible) color at any given time. In one aspect, the calibration facility is configured to adjust the light output of at least some light sources of the lighting unit so as to compensate for perceptible differences between similar light sources used in different lighting units.

For example, in one embodiment, the processor 3600 of the lighting unit 102 is configured to control one or more of the light sources 300 so as to output radiation at a calibrated intensity that substantially corresponds in a predetermined manner to a control

-80-

signal for the light source(s). As a result of mixing radiation having different spectra and respective calibrated intensities, a calibrated color is produced. In one aspect of this embodiment, at least one calibration value for each light source is stored in the data facility 3700, and the processor 3600 is programmed to apply the respective calibration values to the control signals for the corresponding light sources so as to generate the calibrated intensities.

In one aspect of this embodiment, one or more calibration values may be determined once (e.g., during a lighting unit manufacturing/testing phase) and stored in memory 3700 for use by the processor 3600. In another aspect, the processor 3600 may be configured to derive one or more calibration values dynamically (e.g. from time to
5 time) with the aid of one or more photosensors, for example. In various embodiments, the photosensor(s) may be one or more external components coupled to the lighting unit, or alternatively may be integrated as part of the lighting unit itself. A photosensor is one example of a signal source that may be integrated or otherwise associated with the lighting unit 102, and monitored by the processor 3600 in connection with the operation
10 of the lighting unit. Other examples of such signal sources are discussed further below, in connection with the signal source 8400.

One exemplary method that may be implemented by the processor 3600 to derive one or more calibration values includes applying a reference control signal to a light source, and measuring (e.g., via one or more photosensors) an intensity of radiation thus generated by the light source. The processor may be programmed to then make a comparison of the measured intensity and at least one reference value (e.g., representing an intensity that nominally would be expected in response to the reference control signal). Based on such a comparison, the processor may determine one or more calibration values for the light source. In particular, the processor may derive a calibration value such that, when applied to the reference control signal, the light source outputs radiation having an intensity that corresponds to the reference value (i.e., the “expected” intensity).

-81-

In various aspects, one calibration value may be derived for an entire range of control signal/output intensities for a given light source. Alternatively, multiple calibration values may be derived for a given light source (i.e., a number of calibration value "samples" may be obtained) that are respectively applied over different control signal/output intensity ranges, to approximate a nonlinear calibration function in a piecewise linear manner.

Referring to Fig. 25c, typically an LED produces a narrow emission spectrum centered on a particular wavelength; i.e. a fixed color. Through the use of multiple LEDs and additive color mixing a variety of apparent colors can be produced, as described elsewhere herein.

In conventional LED-based light systems, constant current control is often preferred because of lifetime issues. Too much current can destroy an LED or curtail useful life. Too little current produces little light and is an inefficient or ineffective use of the LED.

The light output from a semiconductor illuminator may shift in wavelength as a result in changes in current. In general, the shift in output has been thought to be undesirable for most applications, since a stable light color is often preferred to an unstable one. Recent developments in LED light sources with higher power ratings (>100mA) have made it possible to operate LED systems effectively without supplying maximum current. Such operational ranges make it possible to provide LED-based lighting units 102 that have varying wavelength outputs as a function of current. Thus, different wavelengths of light can be provided by changing the current supplied to the LEDs to produce broader bandwidth colors (potentially covering an area, rather than just a point, in the chromaticity diagram of Fig. 26), and to produce improved quality white light. This calibration technique not only changes the apparent intensity of the LEDs (reflecting the portion of the duty cycle of a pulse width modulation signal during which the LED is on as compared to the portion during which it is off), but also shifting the output wavelength or color. Current change can also broaden the narrow emission of the

-82-

source, shifting the saturation of the light source towards a broader spectrum source. Thus, current control of LEDs allows controlled shift of wavelength for both control and calibration purposes.

5 In the visible spectrum, roughly 400 to 700nm, the sensitivity of the eye varies according to wavelength. The sensitivity of the eye is least at the edges of that range and peaks at around 555nm in the middle of the green.

Referring to Fig. 25b, a schematic diagram shows pulse shapes for a PWM signal. By rapidly changing the current and simultaneously adjusting the intensity via PWM, a broader spectrum light source can be produced. Fig. 25b shows two PWM
10 signals. The two PWM signals vary both in current level and width. The top one has a narrower pulse-width, but a higher current level than the bottom one. The result is that the narrower pulse offsets the increased current level in the top signal. As a result, depending on the adjustment of the two factors (on-time and current level) both light outputs could appear to be of similar brightness. The control is a balance between current
15 level and the on time. Fig. 25a shows an embodiment of a drive facility 3800 for simultaneous current control and on-off control under the control of a processor 3600.

Controlled spectral shifting can also be used to adjust for differences between light sources 300, such as differences between individual light sources 300 from the same vendor, or different lots, or "bins," of light sources 300 from different vendors,
20 such as to produce lighting units 102 that produce consistent color and intensity from unit to unit, notwithstanding the use of different kinds of light sources 300 in the respective lighting units 102.

Fig. 25c shows the effect of changing both the current and adjusting the PWM for the purposes of creating a better quality white by shifting current and pulse-widths
25 simultaneously and then mixing multiple sources, such as RG & B, to produce a high quality white. The spectrum is built up by rapidly controlling the current and on-times to produce multiple shifted spectra. Thus, the original spectrum is shifted to a broader-spectrum by current shifts, while coordinated control of intensity is augmented by changes in PWM.

-83-

Current control can be provided with various embodiments, including feedback loops, such as using a light sensor as a signal source 8400, or a lookup table or similar facility that stores light wavelength and intensity output as a function of various combinations of pulse-width modulation and pulse amplitude modulation.

5 In embodiments, a lighting system can produce saturated colors for one purpose (entertainment, mood, effects), while for another purpose it can produce a good quality variable white light whose color temperature can be varied along with the spectral properties. Thus a single fixture can have narrow bandwidth light sources for multicolor light applications and then can change to a current and PWM control mode to get broad
10 spectra to make good white light or non-white light with broader spectrum color characteristics. In addition, the control mode can be combined with various optical facilities 400 described above to further control the light output from the system. In embodiments, the methods and systems can include a control loop and fast current sources to allow an operator to sweep about a broad spectrum. This could be done in a
15 feed-forward system or with feedback to insure proper operation over a variety of conditions.

The control facility 3500 can switch between a current-control mode 2502 (which itself could be controlled by a PWM stream) and a separate PWM mode 2504. Such a system can include simultaneous current control via PWM for wavelength and PWM
20 control balanced to produce desired output intensity and color. Fig. 25a shows a schematic diagram with one possible embodiment for creating the two control signals from a controller, such as a microprocessor to control one or more LEDs in a string. Multiple such strings can be used to create a light fixture that can vary in color (HSB) and spectrum based on the current and on-off control. The PWM signal can also be a
25 PWM Digital-to-analog converter (DAC) such as those from Maxim and others. Note that the functions that correspond to particular values of output can be calibrated ahead of time by determining nominal values for the PWM signals and the resultant variations in the LED output. These can be stored in lookup tables or a function created that allows the mapping of desired values from LED control signals.

-84-

It may even be desirable to overdrive the LEDs. Although the currents would be above nominal operating parameters as described by the LED manufacturers, this can provide more light than normally feasible. The power source will also be drained faster, but the result can be a much brighter light source.

5

Modulation of lighting units 102 can include a data facility 3700, such as a look-up table, that determines the current delivered to light sources 300 based on predetermined values stored in the data facility 3700 based on inputs, which may include inputs from signal sources 8400, sensors, or the like.

10

It is also possible to drive light sources 300 with constant current, such as to produce a single color of light.

15

The methods and systems disclosed herein also include a variety of methods and systems for light control, including central control facilities 3500 as well as control facilities that are local to lighting units 102. One grouping of control facilities 3500 includes dimmer controls, including both wired and wireless dimmer control. Traditional dimmers can be used with lighting units 102, not just in the traditional way using voltage control or resistive load, but rather by using a processor to scale and control output by interpreting the levels of voltage. In combination with a style and interface that is familiar to most people because of the ubiquity of dimmer switches, one aspect of the present specification allows the position of a dimmer switch (linear or rotary) to indicate color temperature or intensity through a power cycle control. That is, the mode can change with each on or off cycle. A special switch can allow multiple modes without having to turn off the lights. An example of a product that uses this technique is the Color Dial, available from Color Kinetics.

20
25

30

Referring to Fig. 26, a chromaticity diagram shows a range of colors that can be viewed by the human eye. The gamut 2614 defines the range of colors that it is possible to produce by additively mixing colors from multiple sources, such as three LEDs. Green LEDs produce light in a green region 2612, red LEDs produce light in a red region

-85-

2618 and blue LEDs produce light in a blue region 2620. Mixing these colors produces mixed light output, such as in the overlapping areas between the regions, including those for orange, purple and other mixed light colors. Mixing all three sources produces white light, such as along a black body curve 1310. Different mixtures produce different color temperatures of white light along or near the black body curve 2610. Typically an LED produces a narrow emission spectrum centered on a particular wavelength; i.e. a fixed color and a single point on the chromaticity diagram. Through the use of multiple LEDs and additive color mixing a variety of apparent colors can be produced. In embodiments the gamut 2614 may be determined by a program stored on the data storage facility 3700, rather than by the light output capacities of light sources 300. For example, a more limited gamut 2614 may be defined to ensure that the colors within the gamut 2614 can be consistently produced by all light sources 300 across a wide range of lighting units 102, even accounting for lower quality light sources 300. Thus, such a program can improve consistency of lighting units 102 from unit to unit.

The photopic response of the human eye varies across different colors for a given intensity of light radiation. For example, the human eye may tend to respond more effectively to green light than to blue light of the same intensity. As a result, a lighting unit 102 may seem dimmer if turned on blue than the same lighting unit 102 seems when turned on green. However, in installations of multiple lighting units 102, users may desire that different lighting units 102 have similar intensities when turned on, rather than having some lighting units 102 appear dim while others appear bright. A program can be stored on a data storage facility 3700 for use by the processor 3600 to adjust the pulses of current delivered to the light sources 300 (and in turn the apparent intensity of the light sources) based on the predicted photopic response of the human eye to the color of light that is called for by the processor 3600 at any given time. A lookup table or similar facility can associate each color with a particular intensity scale, so that each color can be scaled relative to all others in apparent intensity. The result is that lighting units 102 can be caused to deliver light output along isoluminance curves (similar to topographic lines on a map) throughout the gamut 2614, where each curve represents a common level of apparent light output of the lighting unit 102. The program can account

-86-

for the particular spectral output characteristics of the types of light sources 300 that make up a particular type of lighting unit 102 and can account for differences in the light sources 300 between different lighting units 102, so that lighting units 102 using different light sources 300, such as from different vendors, can nevertheless provide light
5 output of consistent intensity at any given color.

A control interface 4900 may be provided for a lighting unit 102. The interface can vary in complexity, ranging from having minimal control, such as “on-off” control and dimming, to much more extensive control, such as producing elaborate shows and
10 effects using a graphical user interface for authoring them and using network systems to deliver the shows and effects to lighting units 102 deployed in complex geometries.

Referring to Fig. 27a, it is desirable to provide a light system manager 5000 to manage a plurality of lighting units 102 or light systems 100.
15

Referring to Fig. 27b, the light system manager 5000 is provided, which may consist of a combination of hardware and software components. Included is a mapping facility 5002 for mapping the locations of a plurality of light systems. The mapping facility may use various techniques for discovering and mapping lights, such as
20 described herein or as known to those of skill in the art. Also provided is a light system composer 5004 for composing one or more lighting shows that can be displayed on a light system. The authoring of the shows may be based on geometry and an object-oriented programming approach, such as the geometry of the light systems that are discovered and mapped using the mapping facility, according to various methods and
25 systems disclosed herein or known in the art. Also provided is a light system engine, for playing lighting shows by executing code for lighting shows and delivering lighting control signals, such as to one or more lighting systems, or to related systems, such as power/data systems, that govern lighting systems. Further details of the light system manager 5000, mapping facility 5002, light system composer 5004 and light system
30 engine 5008 are provided herein.

-87-

The light system manager 5000, mapping facility 5002, light system composer 5004 and light system engine 5008 may be provided through a combination of computer hardware, telecommunications hardware and computer software components. The different components may be provided on a single computer system or distributed among
5 separate computer systems.

Referring to Fig. 28, in an embodiment, the mapping facility 5002 and the light system composer 5004 are provided on an authoring computer 5010. The authoring computer 5010 may be a conventional computer, such as a personal computer. In
10 embodiments the authoring computer 5010 includes conventional personal computer components, such as a graphical user interface, keyboard, operating system, memory, and communications capability. In embodiments the authoring computer 5010 operates with a development environment with a graphical user interface, such as a Windows environment. The authoring computer 5010 may be connected to a network, such as by
15 any conventional communications connection, such as a wire, data connection, wireless connection, network card, bus, Ethernet connection, Firewire, 802.11 facility, Bluetooth, or other connection. In embodiments, such as in Fig. 28, the authoring computer 5010 is provided with an Ethernet connection, such as via an Ethernet switch 5102, so that it can communicate with other Ethernet-based devices, optionally including the light system
20 engine 5008, a light system itself (enabled for receiving instructions from the authoring computer 5010), or a power/data supply (PDS) 1758 that supplies power and/or data to a light system 100 comprised of one or more lighting units 102. The mapping facility 5002 and the light system composer 5004 may comprise software applications running on the authoring computer 5010.

Referring still to Fig. 28, in an architecture for delivering control systems for complex shows to one or more light systems, shows that are composed using the authoring computer 5010 are delivered via an Ethernet connection through one or more Ethernet switches to the light system engine 5008. The light system engine 5008
30 downloads the shows composed by the light system composer 5004 and plays them, generating lighting control signals for light systems. In embodiments, the lighting

-88-

control signals are relayed by an Ethernet switch to one or more power/data supplies and are in turn relayed to light systems that are equipped to execute the instructions, such as by turning LEDs on or off, controlling their color or color temperature, changing their hue, intensity, or saturation, or the like. In embodiments the power/data supply may be
5 programmed to receive lighting shows directly from the light system composer 5004. In embodiments a bridge may be programmed to convert signals from the format of the light system engine 5008 to a conventional format, such as DMX or DALI signals used for entertainment lighting.

10 Referring to Fig. 29, in embodiments the lighting shows composed using the light system composer 5004 are compiled into simple scripts that are embodied as XML documents. The XML documents can be transmitted rapidly over Ethernet connections. In embodiments, the XML documents are read by an XML parser of the light system engine 5008. Using XML documents to transmit lighting shows allows the combination
15 of lighting shows with other types of programming instructions. For example, an XML document type definition may include not only XML instructions for a lighting show to be executed through the light system engine 5008, but also XML with instructions for another computer system, such as a sound system, and entertainment system, a multimedia system, a video system, an audio system, a sound-effect system, a smoke
20 effect system, a vapor effect system, a dry-ice effect system, another lighting system, a security system, an information system, a sensor-feedback system, a sensor system, a browser, a network, a server, a wireless computer system, a building information technology system, or a communication system.

25 Thus, methods and systems provided herein include providing a light system engine for relaying control signals to a plurality of light systems, wherein the light system engine plays back shows. The light system engine 5008 may include a processor, a data facility, an operating system and a communication facility. The light system engine 5008 may be configured to communicate with a DALI or DMX lighting control
30 facility. In embodiments, the light system engine communicates with a lighting control

-89-

facility that operates with a serial communication protocol. In embodiments the lighting control facility is a power/data supply for a lighting unit 102.

In embodiments, the light system engine 5008 executes lighting shows
5 downloaded from the light system composer 5004. In embodiments the shows are delivered as XML files from the light system composer 5004 to the light system engine 5008. In embodiment the shows are delivered to the light system engine over a network. In embodiments the shows are delivered over an Ethernet facility. In embodiments the shows are delivered over a wireless facility. In embodiments the shows are delivered
10 over a Firewire facility. In embodiments shows are delivered over the Internet.

In embodiments lighting shows composed by the light system composer 5004 can be combined with other files from another computer system, such as one that includes an XML parser that parses an XML document output by the light system composer 5004
15 along with XML elements relevant to the other computer. In embodiments lighting shows are combined by adding additional elements to an XML file that contains a lighting show. In embodiments the other computer system comprises a browser and the user of the browser can edit the XML file using the browser to edit the lighting show generated by the lighting show composer. In embodiments the light system engine 5008
20 includes a server, wherein the server is capable of receiving data over the Internet. In embodiments the light system engine 5008 is capable of handling multiple zones of light systems, wherein each zone of light systems has a distinct mapping. In embodiments the multiple zones are synchronized using the internal clock of the light system engine 5008.

25 The methods and systems included herein include methods and systems for providing a mapping facility 5002 of the light system manager 5000 for mapping locations of a plurality of light systems. In embodiments, the mapping system discovers lighting systems in an environment, using techniques described above. In embodiments, the mapping facility then maps light systems in a two-dimensional space, such as using a
30 graphical user interface.

-90-

In embodiments of the invention, the light system engine 5008 comprises a personal computer with a Linux operating system. In embodiments the light system engine is associated with a bridge to a DMX or DALI system.

5 A light system 100 may include a network interface 4902 for delivering data from a control facility 3500 to one or more light systems 100, which may include one or more lighting units 102. The term “network” as used herein refers to any interconnection of two or more devices (including controllers or processors) that facilitates the transport of information (e.g. for device control, data storage, data exchange, etc.) between any two
10 or more devices and/or among multiple devices coupled to the network. As should be readily appreciated, various implementations of networks suitable for interconnecting multiple devices may include any of a variety of network topologies and employ any of a variety of communication protocols. Additionally, in various networks according to the present invention, any one connection between two devices may represent a dedicated
15 connection between the two systems, or alternatively a non-dedicated connection. In addition to carrying information intended for the two devices, such a non-dedicated connection may carry information not necessarily intended for either of the two devices (e.g., an open network connection). Furthermore, it should be readily appreciated that various networks of devices as discussed herein may employ one or more wireless,
20 wire/cable, and/or fiber optic links to facilitate information transport throughout the network.

Fig. 28 illustrates one of many possible examples of a networked lighting system 100 in which a number of lighting units 102 are coupled together to form the networked
25 lighting system. Fig. 30 depicts another networked configuration for a lighting system 100.

The networked lighting system 100 may be configured flexibly to include one or more user interfaces 4908, as well as one or more signal sources 8400 such as
30 sensors/transducers 8402. For example, one or more user interfaces and/or one or more signal sources such as sensors/transducers 8402 (as discussed above in connection with

-91-

Fig. 2) may be associated with any one or more of the lighting units 102 of the networked lighting system 100. Alternatively (or in addition to the foregoing), one or more user interfaces 4908 and/or one or more signal sources 8400 may be implemented as “stand alone” components in the networked lighting system 100. Whether stand alone
5 components or particularly associated with one or more lighting units 102, these devices may be “shared” by the lighting units of the networked lighting system 100. Stated differently, one or more user interfaces 4908 and/or one or more signal sources 8400 such as sensors/transducers 8402 may constitute “shared resources” in the networked lighting system 100 that may be used in connection with controlling any one or more of
10 the lighting units 102 of the system 100.

The lighting system 100 may include one or more lighting unit controllers (LUCs) 3500a, 3500b, 3500c, 3500d for lighting units 102, wherein each LUC is responsible for communicating with and generally controlling one or more lighting units
15 102 coupled to it. Different numbers of lighting units 102 may be coupled to a given LUC in a variety of different configurations using a variety of different communication media and protocols.

Each LUC in turn may be coupled to a central control facility 3500 that is
20 configured to communicate with one or more LUCs. Although Fig. 2 shows four LUCs coupled to the central controller 3500 via a switching or coupling device 3004, it should be appreciated that according to various embodiments, different numbers of LUCs may be coupled to the central controller 3500. Additionally, according to various
25 embodiments of the present invention, the LUCs and the central controller 3500 may be coupled together in a variety of configurations using a variety of different communication media and protocols to form the networked lighting system 100. Moreover, it should be appreciated that the interconnection of LUCs 3500a, 3500b, 3500c, 3500d and the central controller 3500, and the interconnection of lighting units 102 to respective LUCs, may be accomplished in different manners (e.g., using different
30 configurations, communication media, and protocols).

-92-

For example, according to one embodiment of the present invention, the central controller 3500 shown in Fig. 30 may be configured to implement Ethernet-based communications with the LUCs, and in turn the LUCs may be configured to implement DMX-based communications with the lighting units 102. In particular, in one aspect of this embodiment, each LUC may be configured as an addressable Ethernet-based controller and accordingly may be identifiable to the central controller 3500 via a particular unique address (or a unique group of addresses) using an Ethernet-based protocol. In this manner, the central controller 3500 may be configured to support Ethernet communications throughout the network of coupled LUCs, and each LUC may respond to those communications intended for it. In turn, each LUC may communicate lighting control information to one or more lighting units coupled to it, for example, via a DMX protocol, based on the Ethernet communications with the central controller 3500.

More specifically, according to one embodiment, the LUCs 3500a, 3500b, 3500c and 3500d shown in Fig. 30 may be configured to be "intelligent" in that the central controller 3500 may be configured to communicate higher level commands to the LUCs that need to be interpreted by the LUCs before lighting control information can be forwarded to the lighting units 102. For example, a lighting system operator may want to generate a color changing effect that varies colors from lighting unit to lighting unit in such a way as to generate the appearance of a propagating rainbow of colors ("rainbow chase"), given a particular placement of lighting units with respect to one another. In this example, the operator may provide a simple instruction to the central controller 3500 to accomplish this, and in turn the central controller may communicate to one or more LUCs using an Ethernet-based protocol high-level command to generate a "rainbow chase." The command may contain timing, intensity, hue, saturation or other relevant information, for example. When a given LUC receives such a command, it may then interpret the command so as to generate the appropriate lighting control signals which it then communicates using a DMX protocol via any of a variety of signaling techniques (e.g., PWM) to one or more lighting units that it controls.

30

-93-

It should again be appreciated that the foregoing example of using multiple different communication implementations (e.g., Ethernet/DMX) in a lighting system according to one embodiment of the present invention is for purposes of illustration only, and that the invention is not limited to this particular example.

5

In embodiments the central controller 3500 may be a network controller that controls other functions, such as a home network, business enterprise network, building network, or other network.

10 In embodiments a switch, such as a wall switch, can include a processor 3600, memory 3700 and a communications port for receiving data. The switch can be linked to a network, such as an office network, Internet, or home network. Each switch can be an intelligent device that responds to communication signals via the communications port to provide control of any lighting units 102 from any location where another switch or intelligent device may be located. Such a switch can be integrated through smart
15 interfaces and networks to trigger shows (such as using a lighting control player, such as iPlayer 2 available from Color Kinetics) as with a lighting controller such as a ColorDial from Color Kinetics. Thus, the switch can be programmed with light shows to create various aesthetic, utilitarian or entertainment effects, of white or non-white colors. In embodiments, an operator of a system can process, create or download shows, including
20 from an external source such as the Internet. Shows can be sent to the switch over a communication facility of any kind. Various switches can be programmed to play back and control any given lighting unit 102. In embodiments, settings can be controlled through a network or other interface, such as a web interface.

25 A switch with a processor 3600 and memory 3700 can be used to enable upgradeable lighting units 102. Thus, lighting units 102 with different capabilities, shows, or features can be supplied, allowing users to upgrade to different capabilities, as with different versions of commercial software programs. Upgrade possibilities include firmware to add features, fix bugs, improve performance, change protocols, add capability and provide compatibility, among others.

-94-

In embodiments a control facility 3500 may be based on stored modes and a power cycle event. The operator can store modes for lighting control, such as on a memory 3700. The system can then look for a power event, such as turning the power on or off. When there is a power event the system changes mode. The mode can be a resting mode, with no signal to the lighting unit 102, or it can be any of a variety of different modes, such as a steady color change, a flashing mode, a fixed color mode, or modes of different intensity. Modes can include white and non-white illumination modes. The modes can be configured in a cycle, so that upon a mode change, the next stored mode is retrieved from memory 3700 and signals for that mode are delivered to the lighting unit 102, such as using a switch, slide, dial, or dimmer. The system can take an input signal, such as from the switch. Depending on the current mode, the input signal from the switch can be used to generate a different control signal. For example, if the mode is a steady color change, the input from the dimmer could accelerate or decelerate the rate of change. If the mode were a single color, then the dimmer signal could change the mode by increasing or decreasing the intensity of light. Of course, system could take multiple inputs from multiple switches, dials, dimmers, sliders or the like, to provide more modulation of the different modes. Finally, the modulated signal can be sent to the lighting unit 102.

In embodiments a system with stored modes can take input, such as from a signal source 8400, such as a sensor, a computer, or other signal source. The system can determine the mode, such as based on a cycle of modes, or by recalling modes from memory, including based on the nature of the signal from the signal source 8400. Then system can generate a control signal for a lighting unit, based on the mode.

Referring to Fig. 31a, the methods and systems disclosed herein may further comprise disposing a plurality of lighting units 102 in a serial configuration and controlling all of them by a stream of data to respective processors 3600, such as ASICs, of each of them, wherein each lighting unit 102 responds to the first unmodified bit of data in the stream, modifies that bit of data, and transmits the stream to the next ASIC. Using such a serial addressing protocol, data can be addressed to lighting units 102 based

-95-

on their location in a series of lighting units 102, rather than requiring knowledge of the exact physical location of each lighting unit 102.

Methods and system provided herein also include providing a self-healing
5 lighting system, which may include providing a plurality of lighting units in a system, each having a plurality of light sources; providing at least one processor associated with at least some of the lighting units for controlling the lighting units; providing a network facility for addressing data to each of the lighting units; providing a diagnostic facility for identifying a problem with a lighting unit; and providing a healing facility for
10 modifying the actions of at least one processor to automatically correct the problem identified by the diagnostic facility.

A lighting unit controller according to the present invention may include a unique address such that the 208 can be identified and communicated with. The LUC may also
15 include a universe address such that the lighting unit controller can be grouped with other controllers or systems and addressed information can be communicated to the group of systems. The lighting unit controller may also have a broadcast address, or otherwise listen to general commands provided to many or all associated systems.

Referring to Fig. 31b, the network interface 4900 may include a network
20 topology with a control facility 3500 and multiple lighting units 102 disposed on the network in a hub-router configuration. Referring to Fig. 31c, the lighting units 102 can be disposed along a high-speed serial bus for receiving control signals from a data facility 3500.

25

A lighting unit 102 may include a physical data interface 4904 for receiving data, such as from another lighting unit 102, from a signal source 8400, from a user interface 4902, or from a control facility 3500. Referring to Fig. 32, the lighting unit 102 may include one or more communication ports 4904 to facilitate coupling of the lighting unit 102 to any of a variety of other devices. For example, one or more communication ports 4904 may facilitate coupling multiple lighting units together as a networked lighting

-96-

system, in which at least some of the lighting units are addressable (e.g., have particular identifiers or addresses) and are responsive to particular data transported across the network.

In embodiments the communication port 4904 can receive a data cable, such as a standard CAT 5 cable type used for networking. Thus, the lighting unit 102 can receive data, such as from a network. By allowing connection of the lighting unit 102 to a communications port 4904, the system allows a lighting designer or installer to send data
5 to a plurality of lighting units 102 to put them in common modes of control and illumination, providing more consistency to the lighting of the overall environment.

Fig. 33 shows various embodiments of physical data interfaces 4902. Fig. 33a shows an embodiment arranged in a wireless network arrangement, using a wireless data
10 interface as the physical data interface, such as a radio frequency interface, infrared interface, Bluetooth interface, 802.11 interface, or other wireless interface. In embodiments the wireless arrangement is a peer-to-peer arrangement. In embodiments such as Fig. 33b, the arrangement is a master-slave arrangement, where one lighting unit 102 controls other lighting units 102 in close proximity. Fig. 33c a retrofit lighting unit
15 102 with a communication port 4904. Fig. 33e shows a socket 3302 or fixture for receiving a lighting unit 102. In this case the socket 3302 includes a processor 3600, such as to providing control signals to the lighting unit 102. The socket 3600 can be connected to a control interface 4900, such as a network, so that it can receive signals, such as from a control facility 3500. Thus, the socket 3302 can serve as a lighting unit
20 controller. By placing control in the socket 3302, it is possible for a lighting designer or installer to provide control signals to a known location, regardless of what bulbs are removed or replaced into the socket 3302. Thus, an environmental lighting system can be arranged by the sockets 3302, then any different lighting units 102 can be installed, responsive to control signals sent to the respective sockets 3302. Sockets 3302 can be
25 configured to receive any kind of light bulb, including incandescent, fluorescent, halogen, metal halide, LED-based lights, or the like. Thus, intelligence can be provided by the processor 3600 to a conventional socket. In embodiments, data can be provided over power lines, thus avoiding the need to rewire the environment, using power line

-97-

carrier techniques as known in the art, the X10 system being one such example, and the HomeTouch system being another.

In the preceding embodiments, a fixture or network can give a lighting unit 102 a command to set to a particular look including, color, color temperature, intensity, saturation, and spectral properties. Thus, when the designer sets the original design he or she may specify a set of particular light bulb parameters so that when a lighting unit 102 is replaced the fixture or network can perform a startup routine that initializes that lighting unit 102 to a particular set of values which are then controlled. In embodiments, the lighting unit 102 identifies itself to the network when the power is turned on. The lighting unit 102 or fixture or socket 3302 can be assigned an address by the central control facility 3500, via a network interface 4900. Thus, there is an address associated with the fixture or socket 3302, and the lighting unit 102 control corresponds to that address. The lighting unit 102 parameters can be set in memory 3700, residing in either the lighting unit 102, socket 3302 or fixture, cable termination 3304 or in a central control facility 3500. The lighting unit 102 can now be set to those parameters. From then on, when the lighting unit 102 is powered up it receives a simple command value already set within the set of parameters chosen by the designer.

As used herein, the terms “wired” transmission and or communication should be understood to encompass wire, cable, optical, or any other type of communication where the devices are physically connected. As used herein, the terms “wireless” transmission and or communication should be understood to encompass acoustical, RF, microwave, IR, and all other communication and or transmission systems where the devices are not physically connected.

Referring to Fig. 33e, the physical data interface 4904 can include a processor included in an end of a cable 3304, so that the cable itself is a lighting unit controller, such as to ensure that as lighting units 102 are replaced, any lighting unit attached to that cable 3304 will respond to signals intended to be addressed to locations of that cable. 3304. This is helpful in environments like airline cabins, where maintenance staff may

-98-

not have time to enter address information for replacement lighting units 102 when earlier units fail.

A lighting unit 102 can respond to input from a user interface 4908. The term
5 “user interface” as used herein refers to an interface between a human user or operator
and one or more devices that enables communication between the user and the device(s).
Examples of user interfaces that may be employed in various implementations of the
present invention include, but are not limited to, switches, human-machine interfaces,
operator interfaces, potentiometers, buttons, dials, sliders, a mouse, keyboard, keypad,
10 various types of game controllers (e.g., joysticks), track balls, display screens, various
types of graphical user interfaces (GUIs), touch screens, microphones and other types of
sensors that may receive some form of human-generated stimulus and generate a signal
in response thereto.

In another aspect, as also shown in Fig. 2, the lighting unit 102 optionally may
include one or more user interfaces 4908 that are provided to facilitate any of a number
of user-selectable settings or functions (e.g., generally controlling the light output of the
lighting unit 102, changing and/or selecting various pre-programmed lighting effects to
be generated by the lighting unit, changing and/or selecting various parameters of
selected lighting effects, setting particular identifiers such as addresses or serial numbers
for the lighting unit, etc.). In various embodiments, the communication between the user
interface 4908 and the lighting unit may be accomplished through wire or cable, or
wireless transmission.

15 In one implementation, the processor 3600 of the lighting unit monitors the user
interface 4908 and controls one or more of the light sources 300 based at least in part on
a user's operation of the interface. For example, the processor 3600 may be configured
to respond to operation of the user interface by originating one or more control signals
for controlling one or more of the light sources. Alternatively, the processor 3600 may
20 be configured to respond by selecting one or more pre-programmed control signals
stored in memory, modifying control signals generated by executing a lighting program,

-99-

selecting and executing a new lighting program from memory, or otherwise affecting the radiation generated by one or more of the light sources.

In particular, in one implementation, the user interface 4908 may constitute one
5 or more switches (e.g., a standard wall switch) that interrupt power to the processor 3600. In one aspect of this implementation, the processor 3600 is configured to monitor the power as controlled by the user interface, and in turn control one or more of the light sources 300 based at least in part on a duration of a power interruption caused by operation of the user interface. As discussed above, the processor may be particularly
10 configured to respond to a predetermined duration of a power interruption by, for example, selecting one or more pre-programmed control signals stored in memory, modifying control signals generated by executing a lighting program, selecting and executing a new lighting program from memory, or otherwise affecting the radiation generated by one or more of the light sources.

15 Referring to Fig. 34 simple user interfaces can be used to trigger control signals. Fig. 34a shows a push button 3402 that triggers stored modes when pressed. Fig. 34b and Fig. 34c show user interfaces 4908 involving slides 3404 that can change the intensity or color, depending on the mode. A dual slide is shown in Fig. 34c, where one
20 slide 3404 can adjust color and the other can adjust intensity, or the like. Fig. 34d and Fig. 34e show dials 3408. The dial can trigger stored modes or adjust color or intensity of light. The dual-dial embodiment of Fig. 34e can include one dial for color and another for intensity. Fig. 34f shows a dial 3408 that includes a processor 3600 and memory 3700, so that the user interface can provide basic instructions, such as for stored
25 modes, but the user interface 4908 also reacts to instructions from a central control facility 3500. Fig. 34g shows a dipswitch 3410, which can be used to set simple modes of a lighting unit 102. Fig. 34h shows a microphone 3412, such as for a voice recognition facility interface to a lighting unit 102, such as to trigger lighting by voice interaction. In embodiments such as fig. 34a, the slide can provide voltage input to a
30 lighting unit 102, and the switch can allow the user to switch between modes of

-100-

operation, such as by selecting a color wash, a specific color or color temperature, a flashing series of colors, or the like.

In various embodiments the slides, switches, dials, dipswitches and the like can be used to control a wide range of variables, such as color, color temperature, intensity,
5 hue, and triggering of lighting shows of varying attributes.

In other embodiments of the present invention it may be desirable to limit user control. Lighting designers, interior decorators and architects often prefer to create a certain look to their environment and wish to have it remain that way over time. Unfortunately, over time, the maintenance of an environment, which includes light bulb
10 replacement, often means that a lighting unit, such as a bulb, is selected whose properties differ from the original design. This may include differing wattages, color temperatures, spectral properties, or other characteristics. It is desirable to have facilities for improving the designer's control over future lighting of an environment.

Referring to Fig. 34i, in embodiments a dial allows a user to select one or more
15 colors or color temperatures from a scale 3414. For example, the scale 3414 can include different color temperatures of white light. The lighting designer can specify use of a particular color temperature of light, which the installer can select by setting the right position on the scale 3414 with the dial. A slide mechanism can be used like the dial to set a particular color temperature of white light, or to select a particular color of
20 non-white light, in either case on a scale. Again, the designer can specify a particular setting, and the installer can set it according to the design plan. Providing adjustable lighting units 102 offers designers and installers much greater control over the correct maintenance of the lighting of the environment.

25 In embodiments, the fixture, socket 3302 or lighting unit 102 can command color setting at installation, either a new setting or a fine adjustment to provide precise color control. In embodiments, the lighting unit 102 allows color temperature control as described elsewhere. The lighting unit 102 is settable, but the fixture itself stores an instruction or value for the setting of a particular color temperature or color. Since the

-101-

fixture is set, the designer or architect can insure that all settable lighting units 102 will be set correctly when they are installed or replaced. An addressable fixture can be accomplished through a cable connection where the distal end of the cable, at the fixture, has a value programmed or set. The value is set through storage in memory 3700 or over
5 the power lines. A physical connection can be made with a small handheld device, such as a Zapi available from Color Kinetics, to create and set the set of parameters for that fixture and others. If the environment changes over time, as for example during a remodeling, then those values can be updated and changed to reflect a new look for the environment. A person could either go from fixture to fixture to reset those values or
10 change those parameters remotely to set an entire installation quickly. Once the area is remodeled or repainted, as in the lobby of a hotel for example, the color temperature or color can be reset and, for example, have all lighting units 102 in the lobby set to white light of 3500K. Then, in the future, if any lighting unit 102 is replaced or upgraded, any bulb plugged in can be set to that new value. Changes to the installation parameters can
15 be done in various ways, such as by network commands, or wireless communication, such as RF or IR communication.

In various embodiments, the setting can occur in the fixture or socket 3302, in the distal end of a cable 3304, in the proximal end of the cable 3304, or in a central control facility 3500. The setting can be a piece of memory 3700 embedded in any of those
20 elements with a facility for reading out the data upon startup of the lighting unit 102.

In other embodiments it may be desirable to prevent or deter user adjustment. A lighting unit 102 can be programmed to allow adjustment and changes to parameters by a lighting designer or installer, but not by other users. Such systems can incorporate a lockout facility to prevent others from easily changing the settings. This can take the
25 form of memory 3700 to store the current state but allow only a password-enabled user to make changes. One embodiment is a lighting unit 102 that is connected to a network or to a device that allows access to the lighting unit 102 or network. The device can be an authorized device whose initial communication establishes trust between two devices or between the device and network. This device can, once having established the
30 connection, allow for the selection or modification of pattern, color, effect or relationship

-102-

between other devices such as ambient sensors or external devices. The system can store modes, such as in memory 3700. The system can detect a user event, such as an attempt by the user to change modes, such as sending an instruction over a network or wireless device. The system queries whether the user is authorized to change the mode of the lighting unit 102, such as by asking for a password, searching for a stored password, or checking a device identifier for the device through which the user is seeking to change the mode of the lighting unit 102. If the user is not authorized, then the system maintains the previous mode and optionally notifies the lighting designer, installer, or other individual of the unauthorized attempt to change the mode. If the user is authorized, then the user is allowed to change the mode. Facilities for allowing only authorized users to trigger events are widely known in the arts of computer programming, and any such facilities can be used with a processor 3600 and memory 3700 used with a lighting unit 102.

In other embodiments, the lighting designer can specify changes in color over time or based on time of day or season of year. It is beneficial for a lighting unit 102 to measure the amount of time that it has been on and store information in a compact form as to its lighting history. This provides a useful history of the use of the light and can be correlated to use lifetime and power draw, among other measurements. An intelligent networked lighting unit 102 can store a wide variety of useful information about its own state over time and the environmental state of its surroundings. A lighting unit can store a histogram, a chart representing value and time of lighting over time. The histogram can be stored in memory 3700. A histogram can chart on time versus off time for a lighting unit 102. A histogram can be correlated to other data, such as room habitation, to develop models of patterns of use, which can then be tied into a central control facility 3500, such as integrated with a building control system.

In embodiments a user interface 4908 instructs a lighting system 100 to produce a desired mixed light output. The user interface can be a remote control, a network interface, a dipswitch, a computer, such as a laptop computer, a personal computer, a network computer, or a personal digital assistant, an interface for programming an on-board memory of the illumination system, a wireless interface, a digital facility, a remote

-103-

control, a receiver, a transceiver, a network interface, a personal computer, a handheld computer, a push button, a dial, a toggle/membrane switch, an actuator that actuates when one part of a housing is rotated relative to another, a motion sensor, an insulating strip that is removed to allow power to a unit, an electrical charge to turn a unit on, or a
5 magnetic interface such as a small reed-relay or Hall-effect sensor that can be incorporated so when a magnetic material is brought within the proximity of the device it completes a power circuit.

Referring to Fig. 35a, a user interface 4908 may include a browser 3550 running
10 on a computer. The browser 3550 may be used to trigger shows, such as ones stored locally at a power data supply 1758 connected to a network, such as through an Ethernet switch. In general a computer may supply a graphical user interface for authoring and triggering shows, as described in more detail below. Fig. 35b shows a graphical user interface 3502 for a playback controller that can control the playback of shows, such as
15 ones stored in memory 3700 of a lighting system 100.

In embodiments a keypad 3650 may be used to store control signals for lighting shows. Buttons 3652 on the keypad 3650 may be used to trigger stored shows, such as to be delivered directly to lighting units 102 or to deliver them across a network, such as in
20 the Ethernet configuration of Fig. 36.

In embodiments it may be important to provide an addressing facility 6600 for providing an address to a lighting unit 102 or light system 100. An address permits a particular lighting unit 102 to be identified among a group of lighting units 102 or a
25 group of lighting units 102 to be identified among a larger group, or a group of other devices deployed on a common network. An address in turn permits use of the mapping facility 5002 for mapping locations of lighting units 102 according to their unique identifiers or addresses. Once locations are mapped, it is possible to deliver control signals to the lighting units 102 in desired sequences to create complex effects, such as
30 color-chasing rainbows, or the like, based on their correct locations in the world.

-104-

The term “addressable” is used herein to include a device (e.g., a light source in general, a lighting unit or fixture, a controller or processor associated with one or more light sources or lighting units, other non-lighting related devices, etc.) that is configured to receive information (e.g., data) intended for multiple devices, including itself, and to
5 selectively respond to particular information intended for it. The term “addressable” often is used in connection with a networked environment (or a “network,” discussed further below), in which multiple devices are coupled together via some communications medium or media.

10 In one implementation, one or more devices coupled to a network may serve as a controller for one or more other devices coupled to the network (e.g., in a master / slave relationship). In another implementation, a networked environment may include one or more dedicated controllers that are configured to control one or more of the devices coupled to the network. Generally, multiple devices coupled to the network each may
15 have access to data that is present on the communications medium or media; however, a given device may be “addressable” in that it is configured to selectively exchange data with (i.e., receive data from and/or transmit data to) the network, based, for example, on one or more particular identifiers (e.g., “addresses”) assigned to it.

20 More specifically, one embodiment of the present invention is directed to a system of multiple controllable lighting units coupled together in any of a variety of configurations to form a networked lighting system. In one aspect of this embodiment, each lighting unit has one or more unique identifiers (e.g., a serial number, a network address, etc.) that may be pre-programmed at the time of manufacture and/or installation
25 of the lighting unit, wherein the identifiers facilitate the communication of information between respective lighting units and one or more lighting system controllers. In another aspect of this embodiment, each lighting unit 102 may be flexibly deployed in a variety of physical configurations with respect to other lighting units of the system, depending on the needs of a given installation.

30

-105-

One issue that may arise in such a system of multiple controllable lighting units 102 is that upon deployment of the lighting units 102 for a given installation, it is in some cases challenging to configure one or more system controllers *a priori* with some type of mapping information that provides a relationship between the identifier for each lighting unit 102 and its physical location relative to other lighting units 102 in the system. In particular, a lighting system designer/installer may desire to purchase a number of individual lighting units each pre-programmed with a unique identifier (e.g., serial number), and then flexibly deploy and interconnect the lighting units in any of a variety of configurations to implement a networked lighting system. At some point before operation, however, the system needs to know the identifiers of the controllable lighting units deployed, and preferably their physical location relative to other units in the system, so that each unit may be appropriately controlled to realize system-wide lighting effects.

Referring to Fig. 37, one way to accomplish mapping is to have one or more system operators and/or programmers manually create one or more custom system configuration files 3700 containing the individual identifiers 3702 for each lighting unit 102 and corresponding mapping information that provides some means of identifying the relative physical locations 3708 of lighting units 102 in the system. Configuration files 3700 can include other attributes, such as the positions lit by a lighting unit 102, as well as the positions of the lighting units 102 themselves. As the number of lighting units 192 deployed in a given system increases and the physical geometry of the system becomes more complex, however, and the process of creating manual configuration files can quickly become unwieldy. Rather than manually entering configuration data, it is desirable to have other methods of detecting addresses and mapping addresses of lighting units 102 to physical locations.

Typically, in a two-way communication system the devices on a network can be queried and they respond through the two-way communications network. In this way a list of the devices on the network can be created and stored in the configuration file. However, because data signals and data generators must be robust against faults, noise,

-106-

breaks and the like, a non-trivial amount of circuitry is required to drive a network in a robust manner for two-way communications. For networked lighting units 100, cost is an important factor, so it may not be desirable to have a more expensive two-way communications network. Thus, lighting units 100 or other devices on a network may not contain driver circuitry to provide a two-way communication path, thus keeping them simple and low cost. However, if there is a one-way communication path on a network then devices on a network do not respond, and the identities of these devices are unknown unless discovered or entered *a priori*. Methods and systems described below allow a system to identify lighting units 100 and other network devices without a two-way communication path.

In view of the foregoing, one embodiment of the invention is directed to methods and systems that facilitate a determination of the respective identifiers of controllable lighting units or other network devices coupled together to form a networked system, such as a lighting system. In one aspect of this embodiment, each lighting unit of the system has a pre-programmed multiple-bit binary identifier, and a determination algorithm is implemented to iteratively determine (i.e., "learn") the identifiers of all lighting units that make up the system. In various aspects, such determination/learning algorithms may employ a variety of detection schemes during the identifier determination process, including, but not limited to, monitoring a power drawn by lighting units at particular points of the process, monitoring an illumination state of one or more lighting units at particular points of the determination process, or monitoring exceptional conditions such as shorts in the data communication path to one or more lighting units.

Once the collection of identifiers for all lighting units of the system is determined (or manually entered), another embodiment of the present invention is directed to facilitating the compilation of mapping information that relates the identified lighting units 102 to their relative physical locations in the installation. In various aspects of this embodiment, the mapping information compilation process may be facilitated by one or

-107-

more graphical user interfaces that enable a system operator and/or programmer to conveniently configure the system based on either learned and/or manually entered identifiers of the lighting units, as well as one or more graphic representations of the physical layout of the lighting units relative to one another.

5

In an embodiment, identifiers for lighting units 102 can be determined by a series of steps. First, a set of lighting units 102 having unique identifiers stored in memory 3700 are provided. Next, address identification information is provided to the lighting units. Next, the lighting unit 102 is caused to read the address identification information, compare the address identification information to at least a portion of the identifier, and cause the lighting unit 102 to respond to the address identification information by either energizing or de-energizing one or more light sources of the lighting unit 102. Finally, the system monitors the power consumed by the lighting unit to provide an indication of the comparison between the identifier and the address identification information..

10

15

In embodiments each lighting unit controller includes a power sensing module that provides one or more indications to the LUC when power is being drawn by one or more lighting units coupled to the LUC (i.e., when one or more light sources of one or more of the lighting units is energized). The power-sensing module also may provide one or more output signals to the processor 3600, and the processor 3600 in turn may communicate to the central control facility 3500 information relating to power sensing.

20

The power sensing module, together with the processor 3600, may be adapted to determine merely when any power is being consumed by any of the lighting units coupled to the LUC, without necessarily determining the actual power being drawn or the actual number of units drawing power. As discussed further below, such a “binary” determination of power either being consumed or not consumed by the collection of lighting units 102 coupled to the LUC facilitates an identifier determination/learning algorithm (e.g., that may be performed by the LUC processor 3600 or the central control facility 3500) according to one embodiment of the invention. In other aspects, the power

25

30

-108-

sensing module and the processor 3600 may be adapted to determine, at least approximately, and actual power drawn by the lighting units at any given time. If the average power consumed by a single lighting unit is known *a priori*, the number of units consuming power at any given time can then be derived from such an actual power measurement. Such a determination is useful in other embodiments of the invention, as discussed further below.

As discussed above, according to one embodiment of the invention, the LUC processor 3600 may monitor the output signal from the power sensing module to determine if any power is being drawn by the group of lighting units, and use this indication in an identifier determination/learning algorithm to determine the collection of identifiers of the group of lighting units coupled to the LUC. For purposes of illustrating the various concepts related to such an algorithm, the following discussion assumes an example of a unique four bit binary identifier for each of the lighting units coupled to a given LUC. It should be appreciated, however, that lighting unit identifiers according to the present invention are not limited to four bits, and that the following example is provided primarily for purposes of illustration.

Fig. 38 illustrates a binary search tree 3800 based on four bit identifiers for lighting units, according to one embodiment of the invention. In Fig. 38, it is assumed that three lighting unit 102 are coupled to a generic LUC, and that the first lighting unit has a first binary identifier 3802A of one, one, zero, one (1101), the second lighting unit has a second binary identifier 3802B of one, one, zero, zero (1100), and the third lighting unit has a third binary identifier 3802C of one, zero, one, one (1011). Referring to Fig. 39, exemplary identifiers are used below to illustrate an example of an identifier determination / learning algorithm depicted in Fig. 39.

In embodiments, the collection of identifiers corresponding to the respective units and the number of units are determined. However, it should be appreciated that no particular determination is made of which lighting unit has which identifier. Stated

-109-

differently, the algorithm does not determine a one-to-one correspondence between identifiers and lighting units, but rather merely determines the collection of identifiers of all of the lighting units coupled to the LUC. According to one embodiment of the invention, such a determination is sufficient for purposes of subsequently compiling mapping information regarding the physical locations of the lighting units relative to one another.

One or both of a given LUC processor 3600 or the central control facility 3500 may be configured to execute the algorithm, and that either the processor 3600 or the central control facility 3500 may include memory 3700 to store a flag for each bit of the identifier, which flag may be set and reset at various points during the execution of the algorithm, as discussed further below. Furthermore, for purposes of explaining the algorithm, it is to be understood that the "first bit" of an identifier refers to the highest order binary bit of the identifier. In particular, with reference to the example of Fig. 38, the four identifier bits are consecutively indicated as a first bit 3804, a second bit 3808, a third bit 3810, and a fourth bit 3812.

Referring again to the exemplary identifiers and binary tree illustrated in Fig. 38, the mapping algorithm implements a complete search of the binary tree to determine the identifiers of all lighting units coupled to a given LUC. The algorithm begins by selecting a first state (either a 1 or a 0) for the highest order bit 3804 of the identifier, and then sends a global command to all of the lighting units coupled to the LUC to energize one or more of their light sources if their respective identifiers have a highest order bit corresponding to the selected state. Again for purposes of illustration, it is assumed here that the algorithm initially selects the state "1" (indicated with the reference character 3814 in Fig. 38). In response to this command, all of the lighting units energize their light sources and, hence, power is drawn from the LUC. It should be appreciated, however, that the algorithm may initially select the state "0" (indicated with the reference character 3818 in Fig. 38); in the present case, since no lighting unit has an identifier with a "0" in the highest order bit 3804, no power would be drawn from the LUC and the

-110-

algorithm would respond by setting a flag for this bit, changing the state of this bit, and by default assume that all of the lighting units coupled to the LUC necessarily have a "1" in the highest order bit (as is indeed the case for this example).

5 As a result of a "1" in the highest order bit having been identified, the algorithm adds another bit 3808 with the same state (i.e., "1"), and then sends a global command to all of the lighting units to energize their light sources if their respective identifiers begin with "11" (i.e., 11XX). As a result of this query, the first and second lighting units energize their light sources and draw power, but the third lighting unit does not energize.
10 In any event, some power is drawn, so the algorithm then queries if there are any more bits in the identifier. In the present example there are more bits, so the algorithm returns to adding another bit 3810 with the same state as the previous bit and then sends a global command to all lighting units to energize their light sources if their respective identifiers begin with "111" (i.e., 111X).

15 At this point in the example, no identifiers correspond to this query, and hence no power is drawn from the LUC. Accordingly, the algorithm sets a flag for this third bit 3810, changes the state of the bit (now to a "0"), and again queries if there are any more bits in the identifier. In the present example there are more bits, so the algorithm returns
20 to adding another bit 3812 with the same state as the previous bit (i.e., another "0") and then sends a global command to all lighting units to energize their light sources if they have the identifier "1100."

 In response to this query, the second lighting unit energizes its light sources and
25 hence power is drawn from the LUC. Since there are no more bits in the identifiers, the algorithm has thus learned a first of the three identifiers, namely, the second identifier 3802B of "1100." At this point, the algorithm checks to see if a flag for the fourth bit 3812 has been set. Since no flag yet has been set for this bit, the algorithm changes the bit state (now to a "1"), and sends a global command to all lighting units to energize their
30 light sources if they have the identifier "1101." In the present example, the first lighting

-111-

unit energizes its light sources and draws power, indicating that yet another identifier has been learned by the algorithm, namely, the first identifier 3802A of "1101."

At this point, the algorithm goes back one bit in the identifier (in the present example, this is the third bit 3810) and checks to see if a flag was set for this bit. As pointed out above, indeed the flag for the third bit was set (i.e., no identifiers corresponded to "111X"). The algorithm then checks to see if it has arrived back at the first (highest order) bit 3804 again, and if not, goes back yet another bit (to the second bit 3808). Since no flag has yet been set for this bit (it is currently a "1"), the algorithm changes the state of the second bit (i.e., to a "0" in the present example), and sends a global command to all lighting units to energize their light sources if their respective identifiers begin with "10" (i.e., 10XX). In the current example, the third lighting unit energizes its light sources, and hence power is drawn. Accordingly, the algorithm then sets the flag for this second bit, clears any lower order flags that may have been previously set (e.g., for the third or fourth bits 3810 and 3812), and returns to adding another bit 3810 with the same state as the previous bit. From this point, the algorithm executes as described above until ultimately it learns the identifier 1402C of the third lighting unit (i.e., 1011), and determines that no other lighting units are coupled to the LUC.

Again, it should be appreciated that although an example of four bit identifiers was used for purposes of illustration, the algorithm may be applied similarly to determine identifiers having an arbitrary number of bits. Furthermore, it should be appreciated that this is merely one example of an identifier determination / learning algorithm, and that other methods for determining/learning identifiers may be implemented according to other embodiments of the invention.

In this method, the central controller, 3500, determines either that (i) no devices respond or (ii) at least one device on the network responds.

-112-

The algorithmic sequence is a mask and value sequence that with algorithmic methods can rapidly determine the identifiers of all of the network devices. The queries continue to guide and refine the search, and the queries themselves become more complex as the tree of possibilities is traversed. As an example the query might be expressed in English as “Do you have a 1 in the first position, a 0 in the second position and a 1 in the third position?”

If no device satisfies the query, then all identifiers further down the search tree are pruned from the search. If one or more devices satisfy the query then the search moves on to other bits to determine the unique identifier. This is an efficient binary search technique. After a rapid sequence of steps, the complete set of identifiers for all of the networked devices can be established. However, it should be appreciated that other methods of search can be employed including the exhaustive, sequential or breadth first or depth first search techniques.

Once the identification of the network devices is complete, the unique identifiers can be used to communicate directly with those devices or a separate address can be established that is more befitting the networking protocol. For example, in one embodiment the unique identifier may be represented by 32 bits but the address, such as that for DMX protocol, may be only 8 bits. Thus once the unique identifiers are determined, another communication sequence can be established to create or change the address of the network device.

In another aspect to the invention, the backchannel technique can be used to read data stored in the memory of the network device. This may include parameters for calibration, testing, temperature and other values that can be stored on the device. In one aspect of the invention the data can be read out of EEPROM.

In another embodiment of this system, this system can be integrated into a load center or circuit breaker box. Using the power draw technique for bit indication, then devices on the power network can indicate their unique identifier. This assumes one-way

-113-

communication to the device, which can be over the power lines or by RF or optical or electromagnetic means.

Once the identification of the individual devices on the network is completed,
5 another technique can be used to identify topology of the network, namely, timing. In
this embodiment a single remote networked device is commanded to drive the data line
to HIGH or LOW. This provides a shorted path for electrical testing and timing. In this
embodiment an electrical signal is sent over the line and timed for a return to the central
controller. Using this technique and accurate timing, the position on the network, and
10 importantly, the relative position on the network can be determined. This knowledge of
relative positions of the individual devices assists with the mapping of the various
devices on the network and their relative positions for later control purposes. It should be
appreciated that there are a variety of means to establish the distance of a short along a
wire and that this particular technique in no way limits the type of technique used.

15 In networks where the nodes on a serial network have no unique identifier but
can be individually controlled, another technique is used to determine the number of
nodes on a string. In this system, the addresses are implicit from the position on the
string. In this invention the number of nodes in the system can be determined by
20 monitoring power draw. It is assumed that there are a maximum number of nodes on a
string such as 256 nodes. Each node is individually addressable but we do not know how
many nodes are on the string. The combination of binary search and power monitoring is
used to determine the number of nodes on the string. At each step a single node is tested
and the outcome determines whether to check above or below that node. In one
25 embodiment a binary search provides the answer.

A command to one node whose number equals half of the maximum number of
devices is sent to the node network. If power is consumed then the last node number
must be above that node number and a value half-way between the old value and the max
30 value is tested. If no power is consumed then it must be a lower number and then next
node number chosen is one-half of the previous value. This binary sequence continues

-114-

and the number of nodes on the string can be precisely determine in N steps where 2^N is the number of nodes.

For example if there are 256 maximum possible nodes but a given string has only 83 then the test, in one scenario, can be constructed as:

Test node 128. No power. Check lower.

Test node 64. Power consumed. Check higher.

Test node $(128-64/2 = 96)$ No power. Check lower.

Test node 80. Power consumed. Check higher

Test node 88. No power consumed. Check lower

Test node 84, No power consumed. Check lower

Test node 82. Power consumed. Check higher

Test node 83 Power consumed. Check higher.

83 is the number of nodes since 84 was tested without power consumption. In this example eight total steps allows determination of the exact number of nodes.

Another embodiment of the invention is to monitor power increments and count up the string until there is no more increase in power draw.

In another embodiment of the invention, rather than using a power-sensing module, a central controller can act by forcing the data on the line to either extreme to 'low' or to 'high'. For example, a controller can drive the base of a transistor and thus bring the data line to ground. In another embodiment, the central device determines that the data line has been forced high or low, through a voltage divider and thus the sequence of command and response provides one bit of information: a 'yes' or 'no' indication that, for example, there is a device on the network that has or hasn't a 1 in that position. In this embodiment, this becomes a binary search, identical to that described above for the power-sensing module. In one embodiment the data line is pulled low by

-115-

using a signal from the controller in the network device connected to the base of a transistor that connects the data line to ground.

In embodiments the binary search trees described herein may vary based on the types of lighting units for which positions are sought. As described above, with linear strings of lighting units, a binary search is done, turning on specific lights and measuring the current draw of the string to determine if there is a real, illuminated light at the chosen address. The search is narrowed down in a binary divide-and-conquer manner until it is evident what the address of the last light on the string is. A string, though, is always linear. With other embodiments, such as the arrays 2208 described in connection with Fig. 22, there can be two or more boards 204 with arrays 2208 chained together on the same power/data supply output. It is desirable to detect not just how many nodes are attached to the power/data supply, but also how many boards 204 and how many nodes or lighting units 100 per board 204. In embodiments a board 204 can have an extra node on the board 204, one that draws current but has no LED attached. The nodes responds to, but does not interfere with, the data that is sent to the last node on a board 204. The power/data supply linearly searches the attached nodes and can detect when no more nodes are attached by noting that no current is drawn at the address in question, while it can also detect when it has lit up the last node on a board when the current drawn is twice what would ordinarily be expected (from both the real and the extra node responding at the address in question).

These methods create a communication backchannel that is highly asymmetric to the forward channel. Unlike DMX, when using a linear addressing protocol there is not one transmitter and many listeners. Instead, there is one transmitter (the power/data supply) and one listener (the first processor 3600 in the string). This first processor 3600 is then the transmitter on a different electrical connection to the second processor 3600, which is a receiver, and so on. In embodiments it is not possible to transmit in the reverse direction down the chain. So, the communications backchannel, as used for the binary tree search methods described herein, is implemented through the power wires, by measuring the presence or absence of load, or the difference between two loads; or the

-116-

magnitude of any of the above. In embodiments just one single bit of information (is this or is this not the last node?) is conveyed, but there is no limit to what kinds of information may be transmitted through this unconventional backchannel.

5 Referring to Fig. 40, in another embodiment, the lighting unit controller may not include a power monitoring system but the methodology of identifying lighting unit addresses according to the principles of the present invention may still be achieved. For example, rather than monitoring the power consumed by one or more lighting units, a visible interpretation of the individual lighting units may be recorded, either by human
10 intervention or another image capture system such as a camera or video recorder. In this case, the images of the light emitted by the individual lighting units may be recorded for each bit identification and it may not be necessary to go up and down the binary task tree as identified above.

15 The method may involve the controlling of light from a plurality of lighting units that are capable of being supplied with addresses (identifiers). The method may comprise the steps of equipping each of the lighting units with a processing facility for reading data and providing instructions to the lighting units to control at least one of the color and the intensity of the lighting units, each processing facility capable of being
20 supplied with an address. For example, the lighting units may include a lighting unit 102 where the processor 3600 is capable of receiving network data. The processor may receive network data and operate the LED(s) 300 in a manner consistent with the received data. The processor may read data that is explicitly or implicitly addressed to it or it may respond to all of the data supplied to it. The network commands may be
25 specifically targeting a particular lighting unit with an address or group of lighting units with similar addresses or the network data may be communicated to all network devices. A communication to all network devices may not be addressed but may be a universe or world style command.

-117-

The method may further comprise the step of supplying each processor with an identifier, the identifier being formed of a plurality of bits of data. For example, each lighting unit 102 may be associated with memory 3700 (e.g. EPROM) and the memory 3700 may contain a serial number that is unique to the light or processor. Of course, the setting of the serial number or other identifier may be set through mechanical switches or other devices and the present invention is not limited by a particular method of setting the identifier. The serial number may be a 32-bit number in EPROM for example.

The method may also comprise sending to a plurality of such processors an instruction, the instruction being associated with a selected and numbered bit of the plurality of bits of the identifier, the instruction causing the processor to select between an "on" state of illumination and an "off" state of illumination for light sources controlled by that processor, the selection being determined by the comparison between the instruction and the bit of the identifier corresponding to the number of the numbered bit of the instruction. For example, a network command may be sent to one or more lighting units in the network of lighting units. The command may be a global command such that all lighting units that receive the command respond. The network command may instruct the processors 102 to read the first bit of data associated with its serial number. The processor 3600 may then compare the first bit to the instructions in the network instruction or assess if the bit is a one or a zero. If the bit is a one, the processor may turn the lighting unit on or to a particular color or intensity. This provides a visual representation of the first bit of the serial number. A person or apparatus viewing the light would understand that the first bit in the serial number is either a one (e.g. light is on) or a zero (e.g. light is off). The next instruction sent to the light may be to read and indicate the setting of the second bit of the address. This process can be followed for each bit of the address allowing a person or apparatus to decipher the address by watching the light sources of the lighting unit turn on and/or off following each command.

-118-

After reducing ambient light at a step 4002, a camera may capture at a step 4006 a representation of which lights are turned on at a step 4004. The method may further comprise capturing a representation of which lighting units are illuminated and which lighting units are not illuminated for that instruction. For example, a camera, video or
5 other image capture system may be used to capture the image of the lighting unit(s) following each such network command. Repeating the preceding two steps for all numbered bits of the identifier allows for the reconstruction of the serial number of each lighting unit in the network at an analysis step 4008. At a step 4012 the analysis is used to generate a table of mapping data for lighting units 102.

10

The method may further comprise assembling the identifier for each of the lighting units, based on the “on” or “off” state of each bit of the identifier as captured in the representation. For example, a person could view the lighting unit’s states and record them to decipher the lighting unit’s serial number or software can be written to
15 allow the automatic reading of the images and the reassembly of the serial numbers from the images. The software may be used to compare the state of the lighting unit with the instruction to calculate the bit state of the address and then proceed to the next image to calculate the next bit state. The software may be adapted to calculate a plurality or all of the bit states of the associated lighting units in the image and then proceed to the next
20 image to calculate the next bit state. This process could be used to calculate all of the serial numbers of the lighting units in the image.

The method may also comprise assembling a correspondence between the known identifiers (e.g. serial numbers) and the physical locations of the lighting units having the
25 identifiers. For example, the captured image not only contains lighting unit state information but it also contains lighting unit position information. The positioning may be relative or absolute. For example, the lighting units may be mounted on the outside of a building and the image may show a particular lighting unit is below the third window from the right on the seventy second floor. This lighting unit’s position may also be
30 referenced to other lighting unit positions such that a map can be constructed which

-119-

identifies all of the identifiers (e.g. serial numbers) with a lighting unit and its position. Once these positions and/or lighting units are identified, network commands can be directed to the particular lighting units by addressing the commands with the identifier and having the lighting unit respond to data that is addressed to its identifier. The method may further comprise controlling the illumination from the lighting units by sending instructions to the desired lighting units at desired physical locations. Another embodiment may involve sending the now identified lighting units address information such that the lighting units store the address information as its address and will respond to data sent to the address. This method may be useful when it is desired to address the lighting units in some sequential scheme in relation to the physical layout of the lighting units. For example, the user may want to have the addresses sequentially increase as the lighting fixtures go from left to right across the face of a building. This may make authoring of lighting sequences easier because the addresses are associated with position or progression.

Another aspect of the present invention relates to communicating with lighting units and altering their address information. In an embodiment, a lighting unit controller LUC may be associated with several lighting units and the controller may know the address information/identifiers for the lighting units associated with the controller. A user may want to know the relative position of one lighting unit as compared to another and may communicate with the controller to energize a lighting unit such that the user can identify its position within an installation. For example, the user may use a computer with a display to show representations of the controller and the lighting units associated with the controller. The user may select the controller, using the representation on the display, and cause all of the associated lighting units to energize allowing the user to identify their relative or absolute positions. A user may also elect to select a lighting unit address or representation associated with the controller to identify its particular position with the array of other lighting units. The user may repeat this process for all the associated lighting unit addresses to find their relative positions. Then, the user may rearrange the lighting unit representations on the display in an order that is more convenient (e.g. in order of the lighting units actual relative positions such as left to

-120-

right). Information relating to the rearrangement may then be used to facilitate future communications with the lighting units. For example, the information may be communicated to the controller and the lighting units to generate new 'working' addresses for the lighting units that correspond with the re-arrangement. In another
5 embodiment, the information may be stored in a configuration file to facilitate the proper communication to the lighting units.

In embodiments a method of determining/compiling mapping information relating to the physical locations of lighting units is provided that includes steps of
10 providing a display system; providing a representation of a first and second lighting unit wherein the representations are associated with a first address; providing a user interface wherein a user can select a lighting unit and cause the selected lighting units to energize; selecting a lighting unit to identify its position and repeating this step for the other
15 lighting unit; re-arranging the representations of the first lighting unit and the second lighting unit on the display using a user interface; and communicating information to the lighting units relating to the rearrangement to set new system addresses. The method may include other steps such as storing information relating to the re-arrangement of the representations on a storage medium. The storage medium may be any electronic storage medium such as a hard drive; CD; DVD; portable memory system or other memory
20 device. The method may also include the step of storing the address information in a lighting unit as the lighting unit working address.

In various embodiments, once the lighting units have been identified, the lighting unit controller may transmit the address information to a computer system. The
25 computer system may include a display (e.g., a graphics user interface) where a representation of the lighting unit controller is displayed as an object. The display may also provide representations of the lighting unit 102 as an object. In an embodiment, the computer, possibly through a user interface, may be used to re-arrange the order of the lighting unit representations. For example, a user may click on the lighting unit
30 representation and all of the lighting units associated with the lighting unit controller

-121-

may energize to provide the user with a physical interpretation of the placement of the lighting unit (e.g. they are located on above the window on the 72nd floor of the building). Then, the user may click on individual lighting unit representations to identify the physical location of the lighting unit within the array of lighting units. As the user identifies the lighting unit locations, the user may rearrange the lighting unit representations on the computer screen such that they represent the ordering in the physical layout. In an embodiment, this information may be stored to a storage medium. The information may also be used in a configuration file such that future communications with the lighting units are directed per the configuration file. In an embodiment, information relating to the rearrangement may be transmitted to the lighting unit controller and new 'working' addresses may be assigned to the individual lighting units. This may be useful in providing a known configuration of lighting unit addresses to make the authoring of lighting shows and effects easier.

Another aspect of the present invention relates to systems and methods of communicating to large-scale networks of lighting units. In an embodiment, the communication to the lighting units originates from a central controller where information is communicated in high level commands to lighting unit controllers. The high level commands are then interpreted by the lighting unit controllers, and the lighting unit controllers generate lighting unit commands. In an embodiment, the lighting unit controller may include its own address such that commands can be directed to the associated lighting units through controller-addressed information. For example, the central controller may communicate light controller addressed information that contains instructions for a particular lighting effect. The lighting unit controller may monitor a network for its own address and once heard, read the associated information. The information may direct the lighting unit controller to generate a dynamic lighting effect (e.g. a moving rainbow of colors) and then communicate control signals to its associated lighting units to effectuate the lighting effect. In an embodiment, the lighting unit controller may also include group address information. For example, it may include a universe address that associates the controller with other controllers or systems to create

-122-

a universe of controllers that can be addressed as a group; or it may include a broadcast address such that broadcast commands can be sent to all controllers on the network.

Referring to Fig. 41, a flow diagram 3900 includes steps for a mapping facility 5002. A mapping facility 5002 can first discover what interfaces are located on an associated network, such as Ethernet switches or power-data systems. The mapping facility can then discover what lights are present. The mapping facility then creates a map layout, using the addresses and locations identified for lights as described above. The mapping can be a two-dimensional representation of the lighting units 102

associated with the mapping facility 5002. The mapping facility 5002 allows the user to group lights within the mapping, until a mapping is complete.

The light system manager 5000 may operate in part on the authoring computer 5010, which may include a mapping facility 5002. The mapping facility 5002 may include a graphical user interface 4212, or management tool, which may assist a user in mapping lighting units to locations. The management tool may include various panes, graphs or tables, each displayed in a window of the management tool. A lights/interfaces pane lists lighting units or lighting unit interfaces that are capable of being managed by the management tool. Interfaces may include power/data supplies (PDS) 1758 for one or more lighting systems, DMX interfaces, DALI interfaces, interfaces for individual lighting units, interfaces for a tile lighting unit, or other suitable interfaces. The interface also includes a groups pane, which lists groups of lighting units that are associated with the management tool, including groups that can be associated with the interfaces selected in the lights/interfaces pane. As described in more detail below, the user can group lighting units into a wide variety of different types of groups, and each group formed by the user can be stored and listed in the groups pane. The interface also includes the layout pane, which includes a layout of individual lighting units for a light system or interface that is selected in the lights/interfaces pane. The layout pane shows a representative geometry of the lighting units associated with the selected interface, such as a rectangular array if the interface is an interface for a rectangular tile light. The layout can be any other configuration, as described in connection with the other figures

-123-

above. Using the interface 4212, a user can discover lighting systems or interfaces for lighting systems, map the layout of lighting units associated with the lighting system, and create groups of lighting units within the mapping, to facilitate authoring of shows or effects across groups of lights, rather than just individual lights. The grouping of lighting units dramatically simplifies the authoring of complex shows for certain configurations of lighting units.

Referring to Fig. 42, the graphical user interface 4212 of the mapping facility 5002 of the authoring computer 5010 can display a map, or it may represent a two- or three- dimensional space in another way, such as with a coordinate system, such as Cartesian, polar or spherical coordinates. In embodiments, lights in an array, such as a rectangular array, can be represented as elements in a matrix, such as with the lower left corner being represented as the origin (0, 0) and each other light being represented as a coordinate pair (x, y), with x being the number of positions away from the origin in the horizontal direction and y being the number of positions away from the origin in the vertical direction. Thus, the coordinate (3, 4) can indicate a light system three positions away from the origin in the horizontal direction and four positions away from the origin in the vertical direction. Using such a coordinate mapping, it is possible to map addresses of real world lighting systems into a virtual environment, where control signals can be generated and associated geometrically with the lighting systems. With conventional addressable lighting systems, a Cartesian coordinate system may allow for mapping of light system locations to authoring systems for light shows. In other embodiments, three-dimensional representations can be provided to simulate three-dimensional locations of lights in the real world, and object-oriented techniques allow manipulation of the representations in the graphical user interface 4212 to be converted to lighting control signals that reflect what is occurring in the graphical user interface 4212.

It may be convenient to map lighting systems in various ways. For example, a rectangular array can be formed by suitably arranging a curvilinear string of lighting units. The string of lighting units may use a serial addressing protocol, such as described

-124-

in the applications incorporated by reference herein, wherein each lighting unit in the string reads, for example, the last unaltered byte of data in a data stream and alters that byte so that the next lighting unit will read the next byte of data. If the number of lighting units N in a rectangular array of lighting units is known, along with the number of rows in which the lighting units are disposed, then, using a table or similar facility, a conversion can be made from a serial arrangement of lighting units 1 to N to another coordinate system, such as a Cartesian coordinate system. Thus, control signals can be mapped from one system to the other system. Similarly, effects and shows generated for particular configurations can be mapped to new configurations, such as any configurations that can be created by arranging a string of lighting units, whether the shape is rectangular, square, circular, triangular, or has some other geometry. In embodiments, once a coordinate transformation is known for setting out a particular geometry of lights, such as building a two-dimensional geometry with a curvilinear string of lighting units, the transformation can be stored as a table or similar facility in connection with the light management system 5002, so that shows authored using one authoring facility can be converted into shows suitable for that particular geometric arrangement of lighting units using the light management system 5002. The light system composer 5004 can store pre-arranged effects that are suitable for known geometries, such as a color chasing rainbow moving across a tile light with sixteen lighting units in a four-by-four array, a burst effect moving outward from the center of an eight-by-eight array of lighting units, or many others.

Various other geometrical configurations of lighting units are so widely used as to benefit from the storing of pre-authored coordinate transformations, shows and effects. For example, a rectangular configuration is widely employed in architectural lighting environments, such as to light the perimeter of a rectangular item, such as a space, a room, a hallway, a stage, a table, an elevator, an aisle, a ceiling, a wall, an exterior wall, a sign, a billboard, a machine, a vending machine, a gaming machine, a display, a video screen, a swimming pool, a spa, a walkway, a sidewalk, a track, a roadway, a door, a tile, an item of furniture, a box, a housing, a fence, a railing, a deck, or any other rectangular item. Similarly, a triangular configuration can be created, using a curvilinear string of

-125-

lighting units, or by placing individual addressable lighting units in the configuration. Again, once the locations of lighting units and the dimensions of the triangle are known, a transformation can be made from one coordinate system to another, and pre-arranged effects and shows can be stored for triangular configurations of any selected number of lighting units. Triangular configurations can be used in many environments, such as for lighting triangular faces or items, such as architectural features, alcoves, tiles, ceilings, floors, doors, appliances, boxes, works of art, or any other triangular items.

Lighting units 102 can be placed in the form of a character, number, symbol, logo, design mark, trademark, icon, or other configuration designed to convey information or meaning. The lighting units can be strung in a curvilinear string to achieve any configuration in any dimension. Again, once the locations of the lighting units are known, a conversion can be made between Cartesian (x, y) coordinates and the positions of the lighting units in the string, so that an effect generated using a one coordinate system can be transformed into an effect for the other. Characters such as those mentioned above can be used in signs, on vending machines, on gaming machines, on billboards, on transportation platforms, on buses, on airplanes, on ships, on boats, on automobiles, in theatres, in restaurants, or in any other environment where a user wishes to convey information.

Lighting units can be configured in any arbitrary geometry, not limited to two-dimensional configurations. For example, a string of lighting units can cover two sides of a building. The three-dimensional coordinates (x, y, z) can be converted based on the positions of the individual lighting units in the string. Once a conversion is known between the (x, y, z) coordinates and the string positions of the lighting units, shows authored in Cartesian coordinates, such as for individually addressable lighting units, can be converted to shows for a string of lighting units, or vice versa. Pre-stored shows and effects can be authored for any geometry, whether it is a string or a two- or three-dimensional shape. These include rectangles, squares, triangles, geometric solids, spheres, pyramids, tetrahedrons, polyhedrons, cylinders, boxes and many others, including shapes found in nature, such as those of trees, bushes, hills, or other features.

-126-

Referring to Fig. 41, a flow diagram 3900 shows various steps that are optionally accomplished using the mapping facility 5002, such as the interface 4212, to map lighting units and interfaces for an environment into maps and layouts on the authoring computer 5010. At a step 3902, the mapping facility 1652 can discover interfaces for lighting systems, such as power/data supplies 1758, tile light interfaces, DMX or DALI interfaces, or other lighting system interfaces, such as those connected by an Ethernet switch. At a step 3904 a user determines whether to add more interfaces, returning to the step 3902 until all interfaces are discovered. At a step 3908 the user can discover a lighting unit, such as one connected by Ethernet, or one connected to an interface discovered at the step 3902. The lights can be added to the map of lighting units associated with each mapped interface, such as in the lights/interfaces pane of the interface 4212. At a step 3910 the user can determine whether to add more lights, returning to the step 3908 until all lights are discovered. When all interfaces and lights are discovered, the user can map the interfaces and lights, such as using the layout pane of the interface 4212. Standard maps can appear for tiles, strings, arrays, or similar configurations. Once all lights are mapped to locations in the layout pane, a user can create groups of lights at a step 3918, returning from the decision point 3920 to the step 3918 until the user has created all desired groups. The groups appear in the groups pane as they are created. The order of the steps in the flow diagram 3900 can be changed; that is, interfaces and lights can be discovered, maps created, or groups formed, in various orders. Once all interfaces and lights are discovered, maps created and groups formed, the mapping is complete at a step 3922. Many embodiments of a graphical user interface for mapping lights in a software program may be envisioned by one of skill in the art in accordance with this invention.

Using a mapping facility, light systems can optionally be mapped into separate zones, such as DMX zones. The zones can be separate DMX zones, including zones located in different rooms of a building. The zones can be located in the same location within an environment. In embodiments the environment can be a stage lighting environment.

-127-

Thus, in various embodiments, the mapping facility allows a user to provide a grouping facility for grouping light systems, wherein grouped light systems respond as a group to control signals. In embodiments the grouping facility comprises a directed
5 graph. In embodiments, the grouping facility comprises a drag and drop user interface. In embodiments, the grouping facility comprises a dragging line interface. The grouping facility can permit grouping of any selected geometry, such as a two-dimensional representation of a three-dimensional space. In embodiments, the grouping facility can permit grouping as a two-dimensional representation that is mapped to light systems in a
10 three-dimensional space. In embodiments, the grouping facility groups lights into groups of a predetermined conventional configuration, such as a rectangular, two-dimensional array, a square, a curvilinear configuration, a line, an oval, an oval-shaped array, a circle, a circular array, a square, a triangle, a triangular array, a serial configuration, a helix, or a double helix.

Referring to Fig. 42, a light system composer 5004 can be provided, running on the authoring computer 5010, for authoring lighting shows comprised of various lighting effects. The lighting shows can be downloaded to the light system engine 5008, to be executed on lighting units 102. The light system composer 5004 is preferably provided
20 with a graphical user interface 4212, with which a lighting show developer interacts to develop a lighting show for a plurality of lighting units 102 that are mapped to locations through the mapping facility 5002. The user interface 4212 supports the convenient generation of lighting effects, embodying the object-oriented programming approaches described above.

Referring to Fig. 43, the user interface 4212 allows a user to develop shows and effects for associated lighting units 102. The user can select an existing effect by initiating a tab 4052 to highlight that effect. In embodiments, certain standard attributes are associated with all or most effects. Each of those attributes can be represented by a
30 field in the user interface 4050. For example, a name field 4054 can hold the name of the effect, which can be selected by the user. A type field 4058 allows the user to enter a

-128-

type of effect, which may be a custom type of effect programmed by the user, or may be selected from a set of preprogrammed effect types, such as by clicking on a pull-down menu to choose among effects. For example, in Fig. 43, the type field 4058 for the second listed effect indicates that the selected effect is a color-chasing rainbow. A group field 4060 indicates the group to which a given effect is assigned, such as a group created through the light system manager interface 2550 described above. For example, the group might be the first row of a tile light, or it might be a string of lights disposed in an environment. A priority field 4062 indicate the priority of the effect, so that different effects can be ranked in their priority. For example, an effect can be given a lower priority, so that if there are conflicting effects for a given group during a given show, the a higher priority effect takes precedence. A start field 4064 allows the user to indicate the starting time for an effect, such as in relation to the starting point of a lighting show. An end field 4068 allows the user to indicate the ending time for the effect, either in relation to the timing of the lighting show or in relation to the timing of the start of the effect. A fade in field 4070 allows the user to create a period during which an effect fades in, rather than changes abruptly. A fade out field 4072 allows the user to fade the effect out, rather than ending it abruptly. For a given selected type of effect, the parameters of the effect can be set in an effects pane 4074. The effects pane 4074 automatically changes, prompting the user to enter data that sets the appropriate parameters for the particular type of effect. A timing pane 4078 allows the user to set timing of an effect, such as relative to the start of a show or relative to the start or end of another effect. Parameters can exist for all or most effects. These include the name 4152, the type 4154, the group 4158, the priority 4160, the start time 4162, the end time 4164, the fade in parameter 4168 and the fade out parameter 4170.

Referring to Fig. 44, a set of effects can be linked temporally, rather than being set at fixed times relative to the beginning of a show. For example, a second effect can be linked to the ending of a first effect at a point 4452. Similarly, a third effect might be set to begin at a time that is offset by a fixed amount relative to the beginning of the second effect. With linked timing of effects, a particular effect can be changed, without requiring extensive editing of all of the related effects in a lighting show. Once a series

-129-

of effects is created, each of them can be linked, and the group can be saved together as a meta effect, which can be executed across one or more groups of lights. Once a user has created meta effects, the user can link them, such as by linking a first meta effect and a second meta effect in time relative to each other. Linking effects and meta effects, a user
5 can script entire shows, or portions of shows. The creation of reusable meta effects can greatly simplify the coding of shows across groups.

In embodiments a user can select an animation effect, in which a user can generate an effect using software used to generate a dynamic image, such as Flash 5
10 computer software offered by Macromedia, Incorporated. Flash 5 is a widely used computer program to generate graphics, images and animations. Other useful products used to generate images include, for example, Adobe Illustrator, Adobe Photoshop, and Adobe LiveMotion.

Referring to Fig. 45, a flow diagram 4500 shows steps for converting computer animation data to lighting control signals. In a light management facility 5000, a map file 4504 is created. A graphics facility 4508 is used to create an animation, which is a sequence 4510 of graphics files. A conversion module 4512 converts the map file and the animation facility, based on linking pixels in the animation facility to lights in the
15 mapping facility. The playback tool 4514 delivers data to light systems 4518, so that the light systems 100 play lighting shows that correspond to the animation effects generated by the animation facility.

Various effects can be created, such as a fractal effect, a random color effect, a
25 sparkle effect, streak effect, sweep effect, white fade effect, XY burst effect, XY spiral effect, and text effect.

As seen in connection with the various embodiments of the user interface 4212 and related figures, methods and systems are included herein for providing a light system
30 composer 5004 for allowing a user to author a lighting show using a graphical user interface 4212. The light system composer 5004 includes an effect authoring system for

-130-

allowing a user to generate a graphical representation of a lighting effect. In embodiments the user can set parameters for a plurality of predefined types of lighting effects, create user-defined effects, link effects to other effects, set timing parameters for effects, generate meta effects, and generate shows comprised of more than one meta effect, including shows that link meta effects.

In embodiments, a user may assign an effect to a group of light systems. Many effects can be generated, such as a color chasing rainbow, a cross fade effect, a custom rainbow, a fixed color effect, an animation effect, a fractal effect, a random color effect, a sparkle effect, a streak effect, an X burst effect, an XY spiral effect, and a sweep effect. In embodiments the light system composer 500-4 allows the user to generate a scrolling effect, such as one that moves across a regular or irregular array of light sources 300, such as a group of boards 204 with arrays 2208 such as described in connection with Figs. 22a-d. The scrolling effect may be a graphic, a logo, an animation effect, a scrolling text effect, an alphanumeric effect, or other scrolling effect.

In embodiments an effect can be an animation effect. In embodiments the animation effect corresponds to an animation generated by an animation facility. In embodiments the effect is loaded from an animation file. The animation facility can be a flash facility, a multimedia facility, a graphics generator, or a three-dimensional animation facility.

In embodiments the lighting show composer facilitates the creation of meta effects that comprise a plurality of linked effects. In embodiments the lighting show composer generates an XML file containing a lighting show according to a document type definition for an XML parser for a light engine. In embodiments the lighting show composer includes stored effects that are designed to run on a predetermined configuration of lighting systems. In embodiments the user can apply a stored effect to a configuration of lighting systems. In embodiments the light system composer includes a graphical simulation of a lighting effect on a lighting configuration. In embodiments the simulation reflects a parameter set by a user for an effect. In embodiments the light

-131-

show composer allows synchronization of effects between different groups of lighting systems that are grouped using the grouping facility. In embodiments the lighting show composer includes a wizard for adding a predetermined configuration of light systems to a group and for generating effects that are suitable for the predetermined configuration.

5 In embodiments the configuration is a rectangular array, a string, or another predetermined configuration.

Once a show is downloaded to the light system engine 5008, the light system engine 5008 can execute one or more shows in response to a wide variety of user input.

10 For example, a stored show can be triggered for a lighting unit 102 that is mapped to a particular PDS 1758 associated with a light system engine 5008. There can be a user interface for triggering shows downloaded on the light system engine 5008. For example, the user interface may be a keypad, with one or more buttons for triggering shows. Each button might trigger a different show, or a given sequence of buttons might
15 trigger a particular show, so that a simple push-button interface can trigger many different shows, depending on the sequence. In embodiments, the light system engine 5008 might be associated with a stage lighting system, so that a lighting operator can trigger pre-scripted lighting shows during a concert or other performance by pushing the button at a predetermined point in the performance.

20

In embodiments, other user interfaces can trigger shows stored on a light system engine 5008, such as a knob, a dial, a button, a touch screen, a serial keypad, a slide mechanism, a switch, a sliding switch, a switch/slide combination, a sensor, a decibel meter, an inclinometer, a thermometer, a anemometer, a barometer, or any other input
25 capable of providing a signal to the light system engine 5008. In embodiments the user interface is the serial keypad, wherein initiating a button on the keypad initiates a show in at least one zone of a lighting system governed by a light system engine connected to the keypad.

30 Referring to Fig. 46, a flow diagram 4600 indicates steps for object-oriented authoring of lighting shows as associated with other computer programs, such as

-132-

computer games, three-dimensional simulations, entertainment programs and the like. First, at a step 4602 it is possible to code an object in an application. At a step 4604 it is possible to create instances for the objects. At a step 4608 light a system can add light as an instance to the object in the program. At the step 4610 the system can add a thread to the code of the object-oriented program. At a step 4612 the system can draw an input signal from the thread of the object-oriented program for delivering control signals to a light system 100. By adding light as an instance, lighting control signals can go hand-in-hand with other objects, instances and events that take place in other object-oriented computer programs.

Referring to Fig. 47, a light system composer 5004 can be used to generate an effect that has various parameters. The parameters include the name 4752, type 4754, group 4758, priority 4760, start time 4762, end time 4764, fade in 4768 and fade out 4770, as well as other parameters for particular effects.

Fig. 2 also illustrates that the lighting unit 102 may be configured to receive one or more signals 122 from one or more other signal sources 8400. In one implementation, the processor 3600 of the lighting unit may use the signal(s), either alone or in combination with other control signals (e.g., signals generated by executing a lighting program, one or more outputs from a user interface, etc.), so as to control one or more of the light sources 300 in a manner similar to that discussed above in connection with the user interface 4908.

Examples of the signal(s) that may be received and processed by the processor 3600 include, but are not limited to, one or more audio signals, video signals, power signals, various types of data signals, signals representing information obtained from a network (e.g., the Internet), signals representing some detectable/sensed condition, signals from lighting units, signals consisting of modulated light, etc. In various implementations, the signal source(s) 8400 may be located remotely from the lighting unit 102, or included as a component of the lighting unit. For example, in one

-133-

embodiment, a signal from one lighting unit 102 could be sent over a network to another lighting unit 102.

Some examples of a signal source 8400 that may be employed in, or used in connection with, the lighting unit 102 of Fig. 2 include any of a variety of sensors 8402 or transducers that generate one or more signals in response to some stimulus. Examples of such sensors include, but are not limited to, various types of environmental condition sensors, such as thermally sensitive (e.g., temperature, infrared) sensors, humidity sensors, motion sensors, inclinometers, GPS devices, dead-reckoning devices, gyros, photosensors/light sensors (e.g., sensors that are sensitive to one or more particular spectra of electromagnetic radiation), sound or vibration sensors or other pressure/force transducers (e.g., microphones, piezoelectric devices), and the like.

Additional examples of a signal source 8400 include various metering/detection devices that monitor electrical signals or characteristics (e.g., voltage, current, power, resistance, capacitance, inductance, etc.) or chemical/biological characteristics (e.g., acidity, a presence of one or more particular chemical or biological agents, bacteria, etc.) and provide one or more signals based on measured values of the signals or characteristics. Yet other examples of a signal source 8400 include various types of scanners, image recognition systems, voice or other sound recognition systems, artificial intelligence and robotics systems, and the like.

A signal source 8400 could also be a lighting unit 102, a processor 3600, or any one of many available signal generating devices, such as media players, MP3 players, computers, DVD players, CD players, television signal sources, camera signal sources, microphones, speakers, telephones, cellular phones, instant messenger devices, SMS devices, wireless devices, personal organizer devices, and many others.

Many types of signal source 8400 can be used, for sensing any condition or sending any kind of signal, such as temperature, force, electricity, heat flux, voltage, current, magnetic field, pitch, roll, yaw, acceleration, rotational forces, wind, turbulence,

-134-

flow, pressure, volume, fluid level, optical properties, luminosity, electromagnetic radiation, radio frequency radiation, sound, acoustic levels, decibels, particulate density, smoke, pollutant density, positron emissions, light levels, color, color temperature, color saturation, infrared radiation, x-ray radiation, ultraviolet radiation, visible spectrum
5 radiation, states, logical states, bits, bytes, words, data, symbols, and many others described herein, described in the documents incorporated by reference herein, and known to those of ordinary skill in the arts.

10 In embodiments the lighting unit 102 can include a timing feature based on an astronomical clock, which stores not simply time of day, but also solar time (sunrise, sunset) and can be used to provide other time measurements such as lunar cycles, tidal patterns and other relative time events (harvest season, holidays, hunting season, fiddler crab season, etc.) In embodiments, using a timing facility, a controller 202 can store data relating to such time-based events and make adjustments to control signals based on
15 them. For example, a lighting unit 102 can allow 'cool' color temperature in the summer and warm color temperatures in the winter.

In embodiments the sensor 8402 can be a light sensor, and the sensor can provide control of a lighting signal based on a feedback loop, in which an algorithm modifies the lighting control signal based on the lighting conditions measured by the sensor. In
20 embodiments, a closed-loop feedback system can read spectral properties and adjust color rendering index, color temperature, color, intensity, or other lighting characteristics based on user inputs or feedback based on additional ambient light sources to correct or change light output.

A feedback system, whether closed loop or open loop, can be of particular use in
25 rendering white light. Some LEDs, such as those containing amber, can have significant variation in wavelength and intensity over operating regimes. Some LEDs also deteriorate quickly over time. To compensate for the temperature change, a feedback system can use a sensor to measure the forward voltage of the LEDs, which gives a good indication of the temperature at which the LEDs are running. In embodiments the
30 system could measure forward voltage over a string of LEDs rather than the whole

-135-

fixture and assume an average value. This could be used to predict running temperature of the LED to within a few percent. Lifetime variation would be taken care of through a predictive curve based on experimental data on performance of the lights. Degradation can be addressed through an LED that produces amber or red through another mechanism such as phosphor conversion and does this through a more stable material, die or process. Consequently, CRI could also improve dramatically. That LED plus a bluish white or Red LED then enables a color temperature variable white source with good CRI.

In embodiments a lighting system may coordinate with an external system 8800, such as to trigger lighting shows or effects in response to events of the external system, to coordinate the lighting system with the other system, or the like. External systems 8800 can include other lighting systems 100, entertainment systems, security systems, control systems, information technology systems, servers, computers, personal digital assistants, transportation systems, and many other computer-based systems, including control signals for specific commercial or industrial applications, such as machine vision systems, photographic systems, medical systems, pool systems, spa systems, automotive systems, and many others.

A lighting system 100 can be used to produce various effects 9200, including static effects, dynamic effects, meta effects, geometric effects, object-oriented shows and the like. Effects can include illumination effects 9300, where light from a lighting unit 102 illuminates another object, such as a wall, a diffuser, or other object. Illumination effects 9300 include generating white lighting with color-temperature control. Effects can also include direct view effects 9400, where light sources 300 are viewed directly or through another material. Direct view effects includes displays, works of art, information effects, and others. Effects can include pixel-like effects, effects that occur along series or strings of lighting units 102, effects that take place on arrays of lighting units 102, and three-dimensional effects.

In various embodiments of the present invention, the lighting unit 102 shown in Fig. 2 may be used alone or together with other similar lighting units in a system of

-136-

lighting units (e.g., as discussed further below in connection with Fig. 2). Used alone or in combination with other lighting units, the lighting unit 102 may be employed in a variety of applications including, but not limited to, interior or exterior space illumination in general, direct or indirect illumination of objects or spaces, theatrical or other entertainment-based / special effects illumination, decorative illumination, safety-oriented illumination, vehicular illumination, illumination of displays and/or merchandise (e.g. for advertising and/or in retail/consumer environments), combined illumination and communication systems, etc., as well as for various indication and informational purposes.

10

Referring to Fig. 48, an effect 9200 can include a symbolic effect, such as a sign 1204 disposed on the exterior of a building 4800 or on an interior wall or other object. Such a sign 1204 can be displayed many other places, such as inside a building, on a floor, wall, or ceiling, in a corridor, underwater, submerged in a liquid other than water, or in many other environments. A sign 1204 can consist of a backlit display portion and a configuration, such as of letters, numbers, logos, pictures, or the like. The lighting of the backlit portion and the configuration can be coordinated to provide contrasting colors and various aesthetic effects.

15

20

Referring to Fig. 48, an object 4850 is lit by a lighting system 4850. In this case the object 4850 is a three-dimensional object. The object 4850 can also be lit internally, to provide its own illumination. Thus, the object 4850 can include color and color temperature of light as a medium, which can interact with changes in color and color temperature from the lighting system 4850. Fig. 48 depicts a foreground object 4850 and a background 4852, both with lighting units 102. Thus, both the foreground object 4850 and the background 4852 can be illuminated in various colors, intensities or color temperatures. In an embodiment, the illumination of the foreground object 4850 and the background 4852 can be coordinated by a processor 3600, such as to produce complementary illumination. For example, the colors of the two can be coordinated so that the color of the background 4852 is a complementary color to the color of the foreground object 4850, so when the background 4852 is red, the foreground object 4850

25

30

-137-

is green, etc. Any object 4850 in any environment can serve as a foreground object 4850. For example, it might be an item of goods in a retail environment, an art object in a display environment, an emergency object in a safety environment, a tool in a working environment, or the like. For example, if a processor 3600 is part of a safety system, the
5 object 4850 could be a fire extinguisher, and the background 4852 could be the case that holds the extinguisher, so that the extinguisher is illuminated upon a fire alert to make it maximally noticeable to a user. Similarly, by managing the contrast between the background 4852 and the object 4850, an operator of a retail environment can call attention to the object 4850 to encourage purchasing.

10

In embodiments linear strings or series of lights can embody time-based effects 4854, such as to light a lighting unit 102 in a series when a timed-pulse crosses the location of that lighting unit 102.

15

Effects can be designed to play on arrays 4860, such as created by strings of lighting units 102 that are arranged in such arrays. Effects can be designed in accordance with target areas 4862 that are lit by lighting units 102, rather than in accordance with the lighting units 102 themselves.

20

Referring to Fig. 49, effects can be tied to a sensor 8402 that detects motion in proximity to a lighting unit 102. Waving a hand or other object in proximity to the sensor 8402 can trigger shows or effects. Effects can also play out over arrays, such as triangular configurations 9258 and rectangular arrays 9260. Effects can cause shows to play out over such arrays in a wide range of effects, such as a bounce effect 9260. In
25 embodiments a lighting system 9250 illuminates an object 9252. Depending on the color of the object, it may either be highlighted or not based on the color of the illumination. For example, red illumination will highlight a red object, but blue illumination will make the red object appear dark. Systems can produce motion effects 9262 by illuminating in different colors over time, so that different items appear highlighted at different times,
30 such as the wings 9262 of different colors in Fig. 49.

-138-

Referring to Fig. 50, in embodiments of the methods and systems provided herein, the lighting systems further include disposing at least one such lighting unit on a building 5050. In embodiments the lighting units are disposed in an array on a building. In embodiments the array is configured to facilitate displaying at least one of a number, a word, a letter, a logo, a brand, and a symbol. In embodiments the array is configured to display a light show with time-based effects. In other embodiments lighting units may be disposed on interior walls 5052 to produce such effects.

Lighting systems 100 can be found in a wide range of environments 9600.

Referring to Fig. 51, environments 9600 include airline environments 5102 and other transportation environments, home exterior environments 5108, such as decks, patios and walkways, seating environments 5104 such as in airline cabins, buses, boats, theatres, movies, auditoriums and other seating environments, building environments 5110, such as to light a profile of a building, pool and spa environments 5112, cylindrical lighting environments 5114, domed lighting environments 5118 and many others. Referring to Fig. 52, environments 9600 can include airline cabins 5202, bus environments 5204, medical and surgical environments 5208, dressing room environments 5210, retail display environments 5212, cabinet environments 5214, beauty environments 5218, work environments 5220, and under-cabinet environments 5222. Referring to Fig. 53, additional environments 9600 include home entertainment environments 5302, motion picture and other camera environments 5304, recreational environments 5308, such as boating, interior environments 5310, seating environments 5312, railings 5318, stairs 5320 and alcoves 5314. Referring to Fig. 54, environments 9600 can include automobiles 5402, appliances 5404, trees and plants 5408, houses 5410, playing fields and courts 5412, display environments 5414, signage environments 5418, ceiling tiles 5420, signaling environments 5422, marine signaling environments 5424, theatrical environments 5428 and bowling environments 5430. Referring to Fig. 55, other environments 9600 include swimming environments 5502, military and aircraft environments 5504, industrial environments 5508, such as hangars and warehouses, house environments 5520, train environments 5512, automotive environments 5514,

-139-

such as undercar lightings, fireplace environments 5518 and landscape environments 5520.

The various concepts discussed herein may be suitably implemented in a variety of environments involving LED-based light sources, other types of light sources not including LEDs, environments that involve both LEDs and other types of light sources in combination, and environments that involve non-lighting-related devices alone or in combination with various types of light sources.

The combination of white light with light of other colors as light sources for lighting units 102 can offer multi-purpose lights for many commercial and home applications, such as in pools, spas, automobiles, building interiors (commercial and residential), indirect lighting applications, such as alcove lighting, commercial point of purchase lighting, merchandising, toys, beauty, signage, aviation, marine, medical, submarine, space, military, consumer, under cabinet lighting, office furniture, landscape, residential including kitchen, home theater, bathroom, faucets, dining rooms, decks, garage, home office, household products, family rooms, tomb lighting, museums, photography, art applications, and many others.

One environment 9600 is a retail environment. An object might be an item of goods to be sold, such as apparel, accessories, electronics, toys, food, or any other retail item. The lighting units 102 can be controlled to light the object with a desired form of lighting. For example, the right color temperature of white light can render the item in a true color, such as the color that it will appear in daylight. This may be desirable for food items or for apparel items, where color is very significant. In other cases, the lighting units 102 can light the item with a particular color, to draw attention to the items, such as by flashing, by washing the item with a chasing rainbow, or by lighting the item with a distinctive color. In other cases the lighting can indicate data, such as rendering items that are on sale in a particular color, such as green. The lighting can be controlled by a central controller, so that different items are lit in different colors and

-140-

color temperatures along any timeline selected by the user. Lighting systems can also interact with other computer systems, such as cards or handheld devices of a user. For example, a light can react to a signal from a user's handheld device, to indicate that the particular user is entitled to a discount on the object that is lit in a particular color when the user is in proximity. The lighting units 102 can be combined with various sensors that produce a signal source 8400. For example, an object may be lit differently if the system detects proximity of a shopper.

Subjects to be displayed under controlled lighting conditions also appear in other environment, such as entertainment environments, museums, galleries, libraries, homes, workplaces, and the like.

In a workplace environment lighting units 102 can be used to light the environment 9600, such as a desk, cubicle, office, workbench, laboratory bench, or similar workplace environment. The lighting systems can provide white and non-white color illumination of various colors, color temperatures, and intensities, so that the systems can be used for conventional illumination as well as for aesthetic, entertainment, or utilitarian effects, such as illuminating workplace objects with preferred illumination conditions, such as for analysis or inspection, presenting light shows or other entertainment effects, or indicating data or status. For example, coupled with a signal source 8400, such as a sensor, the workplace lighting systems could illuminate in a given color or intensity to indicate a data condition, such as speed of a factory line, size of a stock portfolio, outside temperature, presence of a person in an office, whether someone is available to meet, or the like.

In embodiments, lighting systems can include an architectural lighting system, an entertainment lighting system, a restaurant lighting system, a stage lighting system, a theatrical lighting system, a concert lighting system, an arena lighting system, a signage system, a building exterior lighting system, a landscape lighting system, a pool lighting system, a spa lighting system, a transportation lighting system, a marine lighting system, a military lighting system, a stadium lighting system, a motion picture lighting system,

-141-

photography lighting system, a medical lighting system, a residential lighting system, a studio lighting system, and a television lighting system.

In embodiments of the methods and systems provided herein, the lighting systems can be disposed on a vehicle, an automobile, a boat, a mast, a sail, an airplane, a wing, a fountain, a waterfall or similar item. In other embodiments, lighting units can be disposed on a deck, a stairway, a door, a window, a roofline, a gazebo, a jungle gym, a swing set, a slide, a tree house, a club house, a garage, a shed, a pool, a spa, furniture, an umbrella, a counter, a cabinet, a pond, a walkway, a tree, a fence, a light pole, a statue or other object.

Referring to Fig. 56, in embodiments a housing 800 for a lighting unit 100 may include a retrofit housing 5602. The retrofit housing 5602 may be configured to fit a conventional lighting fixture, such as a fluorescent lighting fixture. The retrofit housing 5602 is shaped to fit over the space where a conventional fluorescent bulb is located, with the light sources 300 disposed on the top of the retrofit housing to replace the fluorescent bulb as the light source for the fluorescent lighting fixture. A screw hole 5604 or clip can be used to help fasten the unit 100 to a platform, such as a lighting fixture or a flat surface.

Referring to Fig. 57, another retrofit unit 5702 is designed to fit over the part of a fluorescent lighting fixture where the bulbs are located, so that the light sources 300 replace the fluorescent bulb. Screw holes 5702 or clips can be used to fasten the unit 5702 to a surface, such as the surface of a fixture.

Referring to Fig. 58, a housing 800 forms a cylindrical retrofit unit 5802, with a board 204 and light sources 300 disposed on the board 204. The housing 5802 is designed to fit over a conventional circular or cylindrical fixture. A metal tab 5804 serves as a mechanical connector for the housing 5802 and serves as a thermal facility 2500, providing a heat conduction path from the board 204 and light sources 300 the

-142-

lighting fixture to which the housing 5802 can be attached. A screw hole 5808 or clip of the tab 5804 can be used to attach the unit 5802 to a surface.

Fig. 59 shows a retrofit unit 5902 with two rows of light sources 300 to provide light. The retrofit unit 5902 is designed to fit over the space where a fluorescent bulb would otherwise fit. The unit 5902 also provides a thermal conduction path as a thermal facility 2500 to transmit heat from the light sources 300 to the fixture to which the retrofit unit 5902 is attached. The unit 5902 includes tabs 5908 with screw holes 5904 or clips to attach the unit 5902 to a surface, such as a fluorescent lighting fixture.

Fig. 60 shows a retrofit housing 5702 viewed from below. The light sources 300 may be connected to one or more processors 3600, which may provide control to the light sources 300 that are disposed on the top of the retrofit housing 5702.

Referring to Fig. 61, a retrofit housing 5602 can fit over a ballast 6108 of a fluorescent fixture. A cable 6102 can be strung through a hole 6104 in the fluorescent fixture to provide power and data to the light sources 300 of the housing 5602.

Referring to Fig. 62, a retrofit housing 5702 with light sources 300 is configured to fit over the ballast 6208 of a fluorescent fixture. A cable 6202 can be strung through a hole 6204 to deliver power and data to the light sources 300.

Referring to Fig. 63, a hanging lighting fixture 6308 includes a substantially linear channel 6310, into which fluorescent tubes are normally placed. The fixture includes a diffuser 6304 that diffuses light from the light sources 300 that are disposed on retrofit boards 6302 that are disposed in the linear channel 6310.

Referring to Fig. 64, a down light unit 6402 includes light sources 300 as a replacement for a conventional linear bulb, such as a fluorescent or compact fluorescent bulb. The light sources 300 can be positioned on boards 204 both at the top 6404 and underneath the unit 6402, so that the light sources 300 shine both up toward, for

-143-

example, a ceiling and down, such as toward the diffuser 6408. The unit 6404 can be designed to retrofit onto any of a wide range of lighting fixtures, such as to replace fluorescent tubes that are used to light such fixtures.

5 Referring to Fig. 65, a flat fixture 6502 includes lines of light sources 300, as well as an on-board power/data supply 6304 for delivering power and data to the light sources 300. Cables 6508 can run through a space 6510 on the platform 6512, such as to allow wiring of the fixture 6502 onto a surface.

10 Referring to Fig. 66, a retrofit fixture 6602 is designed to fit over a conventional lighting socket, such as a socket for an incandescent or halogen lamp. The retrofit fixture 6602 includes a substantially circular board 204 onto which the light sources 300 are disposed. The fixture 6602 includes sides 6604 that extend downward around the socket 6612. Flared tabs 6610 include screw holes 6608 to allow the user to screw the
15 fixture 6602 over the socket 6612. The sides 6604 may be made of a thermally conductive material to serve as a thermal facility 2500, such as to conduct heat away from the light sources 300 to the fixture to which the retrofit fixture 6602 is attached.

Fig. 67 depicts a fixture 6702 in which light sources 300 are disposed
20 substantially in lines along two planes that are substantially perpendicular to each other. The fixture 6702 can fit over any surface that includes a corner, such as a corner of a wall, a ceiling, a floor, a rectangular fixture, or the like.

Fig. 68 shows a linear lighting fixture 6808 with pins 6814 for supplying power
25 and data to the light sources 300. Power/data supplies 6802, 6804 and cables 6810, 6812 provide power and data to the ends of the fixture 6808. The power/data supplies 6802, 6804 can be disposed with the board 204, or on a lighting fixture to which the unit 6802 is attached. The power/data supplies 6802, 6804 can power one or more light sources 300. In embodiments the power/data supplies 6802, 6804 may be designed to
30 accommodate power from a power line or from a power supply for a traditional lighting fixture, such as a ballast for a fluorescent fixture.

-144-

Fig. 69 shows a linear lighting unit 6902 where an on-board power/data supply 6904 supplies power and data to one end of the lighting fixture 6902. The power/data supply 6904 can be disposed with the board 204, or on a lighting fixture to which the unit 6902 is attached. The power/data supply 6902 can power one or more light sources 300. In embodiments the power/data supply 6902 may be designed to accommodate power from a power line or from a power supply for a traditional lighting fixture, such as a ballast for a fluorescent fixture.

Fig. 70 shows a lighting unit 100 with light sources 300 disposed on a board 204. The board may be a printed circuit board or similar circuit board 204. The board may be positioned on top of a heat-conducting plate 7004, such as a metal plate, that acts as a thermal facility 2500 for conducting heat away from the light sources 300. The heat conducting plate 7004 can conduct heat from the light sources 300 to a flared, heat conductive structure 7002 that serves as a further thermal facility 2500, conducting heat from the board 204 and metal plate 7004 to the fixture housing 800, such as when the board 204 is pressed downward so that the sides of the board 204 contact the flared structure 7002. The unit 100 may include a power/data supply 7008, such as an on-board power/data supply 7008 for supplying power and data for one or more light sources 300. In embodiments the power/data supply 7008 may be attached to the fixture or may be a remote power/data supply.

Fig. 71 shows a lighting unit 100 with a cylindrical optical facility 400, such as a transparent lens 7102 that includes a board 204 with light sources 300. The lens 7102 serves as a protective cover for the light sources 300, prevents a person from touching the light sources 300 and electronics elements (which in embodiments may be high-voltage circuit elements), protects the electronics elements from environmental conditions, and shields the light sources 300 from heat coming from the environment of the lighting unit 100. A conductive plate 7104 serves as a heat sink thermal facility 2500 for conducting heat away from the board 204 and light sources 300. The heat sinking

-145-

plate 7104 can cool radiantly in the air, or it can connect, for example, to a housing for a lighting fixture into which the unit is disposed.

Fig. 72 shows a lighting unit 100 formed into a retrofit housing 7302 with three
5 sides. Two opposite sides 7204, 7208 are substantially parallel, and both are attached to a top side 7210 that is perpendicular to both. A processor 3600, such as an ASIC, can be positioned on the back each of the sides 7204, 7208, 7210 and associated with each
grouping of light sources 300. The housing 7302 can be designed to fit over a traditional
lighting unit, such as a linear lighting fixture, such as a fluorescent fixture, to replace the
10 fluorescent bulb as the light source in the fixture.

Referring to Fig. 73, an array 2208 of light sources 300 may be covered with a
cover 7302 that includes optical facilities 400, such as lenses for shaping beams of light
15 coming from the light sources 300. The cover 7302 may be attached by fasteners 7304, such as screws.

Referring to Fig. 74, in embodiments the boards 204 that hold the arrays 2208
may be fitted with magnetic facilities 7402 along the sides for fastening one board 204 to
20 another. The magnetic facilities 7402 may provide a magnetic connection, as well as providing a power and/or data interface between the boards. The boards 204 may be fitted with other fastening facilities for connecting one board 204 to another, such as ball/socket combinations, adhesives, tapes, interlocking shapes, tabs, or the like. In one
embodiment are disclosed solderable finger joints. Such features, in one embodiment,
25 allow for tile mapping or discovery means during assembly by choice of solder pad for interconnection. The choice of an electrical path provides an indication of an identifying means to provide different inputs to onboard controllers through input and output pins within the modules.

30 In embodiments the arrays 2208 may be irregular arrays of nodes of light sources 300, as can the boards 204 that hold the arrays 2208.

-146-

Referring to Fig. 75, in embodiments the arrays 2208 may be disposed on boards 204 that have interlocking edge joints 7502, 7504, so that one board 204 fits into another board 204. The boards 204 can have dedicated in/out pads 7502, 7504 for data that
5 allow for mapping during assembly by selecting a pad to which a solder will be performed. The interlocking boards can be in different planes, such as to form a right angle. In embodiments interlocking boards 204 can be combined to create geometric shapes, such as the tessellated shapes described elsewhere herein. Such shapes, in combination with narrow beam angle light sources 300 allow a lighting unit 100 to
10 project an image onto multiple surfaces simultaneously.

Fig. 76 shows another embodiment of interlocking boards 204, with tab 7604 designed to fit into space 7602 to form a physical connection, and in embodiments allowing a data and/or power connection.

Referring to Fig. 77, in embodiments the boards 204 that hold the arrays 2208 can include sensors, such as for sensing yaw, pitch, and roll relative to a mapping or geometric position, to assist in mapping the direction of light from the light sources 300. In embodiments the cover 2212 may provide a sealed cover, such as to allow underwater
20 use. Sensors may include GPS, inclinometers, gyros, inertial navigation sensors, dead reckoning devices and other motion sensors.

Referring to Fig. 78, the arrays 2208 can be provided with snap-in interchangeable lenses 7802, such as to change the light coming from the light sources
25 300.

Referring to Fig. 79, a lighting unit 100 may be disposed in or on a block 7902, such as a block of glass, plastic, or the like. The block 7902 can be used as a structure material, such as to build larger light systems.

-147-

Referring to Fig. 80, a lighting unit 100 with light sources 300 may be constructed using a flexible circuit board material 8050 on which a processor 3600 is also disposed to provide control for the light sources 300.

5 Referring to Fig. 81, an array 2208 can be attached to a wall with a mounting cleat 8102, which may be disposed in proximity to a power/data supply 8104 for supplying power and data to the lighting unit 100. The cleat-style mounting can have an integrated electrical connection as well as power. The small ridges, shown in profile in Figure 81, provide electrical connection for both power and data. In another
10 embodiment a feature is provided for attachment to an electrical junction box. In one embodiment the ridges are be shaped horizontally. In another embodiment the ridges are be horizontal features.

In embodiments the boards 204 may include a thermally conductive gap pad or
15 similar thermal facility 2500 to hold heat away from the light sources 300. In embodiments the cover 2212 may provide a sealed housing. The housing may then be an oil-filled housing with clear oil to serve as a thermal facility 2500 and an optical facility 400. A non-conductive particulate could make the light more diffuse. In embodiments the board 204 may include a snap-on secondary optical facility 400 to guide light coming
20 from the light sources 300.

In embodiments the boards 204 may include integrated power/data rails for rapid installation. The rails can be provided in a grid format so that boards 204 can snap into the grid for rapid assembly. In embodiments the rails may serve as tracks, providing a
25 system similar to track lighting where boards 204 snap into a track.

In embodiments a board 204 or other lighting unit 100 may be caused to provide live feedback during installation. The lighting unit 100 can blink or display a specific color in relation to reaching a maximum number of unit per power supply for power or
30 data. The lighting units 100 can display all units in a particular map reason. The lighting

-148-

units 100 can display particular colors based on geometric orientation, such as measured by a sensor.

Having thus described several illustrative embodiments, it is to be appreciated
5 that various alterations, modifications, and improvements will readily occur to those
skilled in the art. Such alterations, modifications, and improvements are intended to be
part of this disclosure, and are intended to be within the spirit and scope of this
disclosure. While some examples presented herein involve specific combinations of
functions or structural elements, it should be understood that those functions and
10 elements may be combined in other ways according to the present invention to
accomplish the same or different objectives. In particular, acts, elements, and features
discussed in connection with one embodiment are not intended to be excluded from
similar or other roles in other embodiments. Accordingly, the foregoing description and
attached drawings are by way of example only, and are not intended to be limiting.

15

-149-

CLAIMS

1. A method of determining an identifier of a networked lighting device among a
5 group of networked lighting devices, comprising:
 providing a plurality of lighting devices with multiple bit binary identifiers, the
plurality of lighting devices arranged in a network;
 delivering a plurality of signals to the lighting devices;
 observing a condition of the network in response to each one of the plurality of
10 signals; and
 inferring an identifier of at least one of the plurality of lighting devices based on
the condition of the network.
2. The method of claim 1 further comprising mapping the identifier to the at least
15 one of the plurality of lighting devices.
3. The method of claim 1 wherein the condition includes an indication of power
drawn by the plurality of lighting devices in the network.
- 20 4. The method of claim 1 wherein the condition includes an exceptional condition
of the network.
5. The method of claim 4 wherein the exceptional condition includes a short in a
data communication path to at least one of the plurality of lighting devices.
25
6. The method of claim 4 wherein the exceptional condition includes a short in a
data communication path to a lighting unit associated with at least one of the plurality of
lighting devices.
- 30 7. The method of claim 1 wherein the condition includes a lighting condition of at
least one of the plurality of lighting devices in the network.

-150-

8. The method of claim 1 wherein the condition includes a time required for a networked lighting device to respond to a signal on the network.

5 9. The method of claim 1 wherein the plurality of signals are delivered according to a binary tree search algorithm.

10. The method of claim 1 wherein the plurality of lighting devices includes at least one string of lighting units.

10

11. The method of claim 10 wherein a determination algorithm is used to determine a location of the at least one string of lighting units.

12. The method of claim 10 wherein a determination algorithm is used to determine a number of nodes on the at least one string of lighting units.

15

13. The method of claim 10 wherein a determination algorithm varies power to the at least one string of lighting units and monitors responsive behavior of the at least one string of lighting units.

20

14. The method of claim 10 wherein a determination algorithm includes a binary search tree algorithm.

15. A system comprising:

25 a plurality of lighting devices with multiple bit binary identifiers, the plurality of lighting devices arranged in a network; and

a controller adapted to determine an identifier for at least one of the plurality of lighting devices by delivering a plurality of signals to the plurality of lighting devices, observing a condition of the network in response to each one of the plurality of signals,

30 and inferring the identifier of the at least one of the plurality of lighting devices based on the condition of the network.

-151-

16. The system of claim 15 further wherein the identifier is mapped to the at least one of the plurality of lighting devices.

5 17. The system of claim 15 wherein the condition includes an indication of power drawn by the plurality of lighting devices in the network.

18. The system of claim 15 wherein the condition includes an exceptional condition of the network.

10

19. The system of claim 18 wherein the exceptional condition includes a short in a data communication path to at least one of the plurality of lighting devices.

15

20. The system of claim 18 wherein the exceptional condition includes a short in a data communication path to a lighting unit associated with at least one of the plurality of lighting devices.

21. The system of claim 15 wherein the condition includes a lighting condition of at least one of the plurality of lighting devices in the network.

20

22. The system of claim 15 wherein the condition includes a time required for a networked lighting device to respond to a signal on the network.

25

23. The system of claim 15 wherein the plurality of signals are delivered according to a binary tree search algorithm.

24. The system of claim 15 wherein the plurality of lighting devices includes at least one string of lighting units.

30

25. The system of claim 24 wherein a determination algorithm is used to determine a location of the at least one string of lighting units.

-152-

26. The system of claim 24 wherein a determination algorithm is used to determine a number of nodes on the at least one string of lighting units.

5 27. The system of claim 24 wherein a determination algorithm varies power to the at least one string of lighting units and monitors responsive behavior of the at least one string of lighting units.

28. The system of claim 24 wherein a determination algorithm includes a binary
10 search tree algorithm.

29. A method of providing a lighting unit, comprising:
providing a housing, the housing being substantially linear and including a first
end, a second end, and a slot for receiving an array of a plurality of LED light sources;
15 disposing the array of LED light sources on a circuit board within the slot;
running an interior power/data feed from the first end to the second end;
disposing at least one connector within at least one of the first end and the second
end, the at least one connector adapted to connect the lighting unit to a similar lighting
unit while allowing the two lighting units to be placed end to end without spacing
20 therebetween; and
providing a thermal facility for removing heat from a proximity of one or more of
the plurality of LED light sources.

30. The method of claim 29 further comprising providing a lens, the lens including
25 an optical facility for operating on the light from the plurality of LED light sources.

31. The method of claim 30 wherein the optical facility includes a phosphor for
shifting a wavelength of light emitted from one or more of the plurality of LEDs.

30 32. The method of claim 29 wherein the thermal facility includes an interior cavity of
the lighting unit for moving air within the housing.

-153-

33. The method of claim 29 wherein the thermal facility includes a vent for releasing air from an interior of the housing to an exterior of the housing.

5 34. The method of claim 29 wherein the thermal facility includes at least one fin for radiating heat from the housing.

35. The method of claim 29 wherein the thermal facility includes a heat-conducting mass integral to the housing.

10

36. The method of claim 29 wherein the thermal facility includes a potting facility for receiving heat from the circuit board.

37. The method of claim 29 wherein the thermal facility includes a metal plate.

15

38. The method of claim 29 wherein the plurality of LEDs include high-brightness LEDs.

39. The method of claim 29 further comprising disposing a lens in a slot above the plurality of LED light sources.

20

40. The method of claim 39 wherein a profile of the lens is co-planar with a top of the housing.

25 41. The method of claim 39 wherein the lens is sealed to prevent a user from accessing the plurality of LEDs.

42. The method of claim 39 wherein the lens is sealed to prevent a user from accessing a drive circuit on the circuit board.

30

-154-

43. The method of claim 29 further comprising providing a power facility for the plurality of LED light sources.

44. The method of claim 43 wherein the power facility includes a high-voltage power facility.

45. The method of claim 43 wherein the power facility includes a power-factor-corrected power facility.

46. The method of claim 43 wherein the power facility includes an on-board power facility.

47. The method of claim 43 wherein the power facility includes an inductively controlled power facility.

48. The method of claim 43 wherein the power facility includes a feed-forward power facility.

49. The method of claim 43 wherein the power facility includes a power/data power facility.

50. The method of claim 29 wherein the lighting unit is a networked lighting unit.

51. The method of claim 50 wherein the lighting unit is addressed using a serial addressing protocol.

52. The method of claim 29 wherein the lighting unit is an addressable lighting unit.

53. The method of claim 52 wherein the lighting unit is addressed using a determination algorithm.

-155-

54. A lighting unit system, comprising:

a housing, the housing being substantially linear and including a slot for receiving an array of a plurality of LED light sources, the array disposed on a circuit board within the housing;

5 an interior power/data feed from a first end of the housing to a second end of the housing;

at least one connector within at least one of the first end and the second end adapted to connect the lighting unit to a similar lighting unit while allowing the two lighting units to be placed end to end without spacing therebetween; and

10 a thermal facility for removing heat from a proximity of the plurality of LED light sources.

55. The system of claim 54 further comprising a lens, the lens including an optical facility for operating on the light from the plurality of LED light sources.

15

56. The system of claim 54 wherein the optical facility includes a phosphor for shifting a wavelength of light emitted from one or more of the plurality of LEDs.

57. The system of claim 54 wherein the thermal facility includes an interior cavity of the lighting unit for moving air within the housing.

20

58. The system of claim 54 wherein the thermal facility includes a vent for releasing air from an interior of the housing to an exterior of the housing.

59. The system of claim 54 wherein the thermal facility includes at least one fin for radiating heat from the housing.

25

60. The system of claim 54 wherein the thermal facility includes a heat-conducting mass integral to the housing.

30

-156-

61. The system of claim 54 wherein the thermal facility includes a potting facility for receiving heat from the circuit board.

62. The system of claim 54 wherein the thermal facility includes a metal plate.

63. The system of claim 54 wherein the plurality of LEDs include high-brightness LEDs.

64. The system of claim 54 further comprising a lens in a slot above the plurality of LED light sources.

65. The system of claim 64 wherein a profile of the lens is co-planar with a top of the housing.

66. The system of claim 64 wherein the lens is sealed to prevent a user from accessing the plurality of LEDs.

67. The system of claim 64 wherein the lens is sealed to prevent a user from accessing a drive circuit on the circuit board.

68. The system of claim 54 further comprising a power facility for the plurality of LED light sources.

69. The system of claim 68 wherein the power facility includes a high-voltage power facility.

70. The system of claim 68 wherein the power facility includes a power-factor-corrected power facility.

71. The system of claim 68 wherein the power facility includes an on-board power facility.

-157-

72. The system of claim 68 wherein the power facility includes an inductively controlled power facility.

5 73. The system of claim 68 wherein the power facility includes a feed-forward power facility.

74. The system of claim 68 wherein the power facility includes a power/data power facility.

10

75. The system of claim 54 wherein the lighting unit is a networked lighting unit.

76. The system of claim 75 wherein the lighting unit is addressed using a serial addressing protocol.

15

77. The system of claim 54 wherein the lighting unit is an addressable lighting unit.

78. The system of claim 77 wherein the lighting unit is addressed using a determination algorithm.

20

79. A method of providing an LED-based lighting unit, comprising:
providing a housing configured in the shape of an MR-type halogen lamp;
providing an MR-type connector for connecting the housing to a power source;
disposing a plurality of LEDs in the housing; and
25 providing a thermal facility for removing heat from a proximity of one or more of the plurality of LEDs.

80. The method of claim 79 wherein the housing is constructed from two cast halves.

30 81. The method of claim 79 wherein the housing is a single cast unit.

-158-

82. The method of claim 79 wherein the thermal facility includes a heat-conducting mass that is integral to the housing.

83. The method of claim 79 wherein the thermal facility includes a vent for allowing
5 air to circulate from the housing.

84. The method of claim 79 wherein the connector provides an internal power and data connection for the plurality of LEDs.

10 85. The method of claim 79 wherein a heat shield protects one or more of the plurality of LEDs from heat generated by power/data circuitry within the housing.

86. The method of claim 85 wherein the heat shield includes a potting facility for trapping heat away from one or more of the plurality of LEDs.

15

87. The method of claim 85 wherein the heat shield includes a metal core board for accepting heat from one or more of the plurality of LEDs.

88. The method of claim 87 wherein the metal core board is a printed circuit board.

20

89. The method of claim 79 wherein one or more of the plurality of LEDs includes at least one heat resistant LED.

90. The method of claim 79 further comprising disposing a lens including an optical
25 facility in a position to operate on light emitted from one or more of the plurality of LEDs.

91. The method of claim 90 wherein the lens includes a screw-type cap.

30 92. The method of claim 90 wherein a gap separates the lens from the one or more of the plurality of LEDs.

-159-

93. The method of claim 90 wherein the lens includes a coating to prevent reflection of radiation back to the plurality of LEDs.

5 94. The method of claim 93 wherein the coating reduces heat within the housing.

95. The method of claim 90 wherein the lens protects one or more of the plurality of LEDs.

10 96. The method of claim 95 wherein lens prevents a user from touching one or more of the plurality of LEDs.

97. The method of claim 95 wherein lens prevents a user from touching one or more electronic components within the housing.

15

98. An LED-based lighting unit system, comprising:
a housing configured in the shape of an MR-type halogen lamp;
an MR-type connector for connecting the housing to a power source;
a plurality of LEDs in the housing; and
20 a thermal facility for removing heat from a proximity of one or more of the plurality of LEDs.

99. The system of claim 98 wherein the housing is constructed from two cast halves.

25 100. The system of claim 98 wherein the housing is a single cast unit.

101. The system of claim 98 wherein the thermal facility includes a heat-conducting mass that is integral to the housing.

30 102. The system of claim 98 wherein the thermal facility includes a vent for allowing air to circulate from the housing.

-160-

103. The system of claim 98 wherein the connector provides an internal power and data connection for the plurality of LEDs.

5 104. The system of claim 98 wherein a heat shield protects one or more of the plurality of LEDs from heat generated by power/data circuitry within the housing.

105. The system of claim 104 wherein the heat shield includes a potting facility for trapping heat away from one or more of the plurality of LEDs.

10

106. The system of claim 104 wherein the heat shield includes a metal core board for accepting heat from one or more of the plurality of LEDs.

107. The system of claim 106 wherein the metal core board is a printed circuit board.

15

108. The system of claim 98 wherein one or more of the plurality of LEDs includes at least one heat resistant LED.

109. The system of claim 98 further comprising a lens, the lens including an optical facility, and the lens positioned to operate on light emitted from one or more of the plurality of LEDs.

20

110. The system of claim 109 wherein the lens includes a screw-type cap.

25 111. The system of claim 109 wherein a gap separates the lens from the one or more of the plurality of LEDs.

112. The system of claim 109 wherein the lens includes a coating to prevent reflection of radiation back to the plurality of LEDs.

30

113. The system of claim 112 wherein the coating reduces heat within the housing.

-161-

114. The system of claim 109 wherein the lens protects one or more of the plurality of LEDs.

5 115. The system of claim 114 wherein lens prevents a user from touching one or more of the plurality of LEDs.

116. The system of claim 114 wherein lens prevents a user from touching one or more electronic components within the housing.

10

117. A method of providing a lighting unit, comprising:

providing a housing, the housing being substantially linear and including a slot for receiving an array of a plurality of LED light sources, wherein the plurality of LED light sources are capable of producing substantially white light;

15

disposing the array on a circuit board within the housing;

running an interior power/data feed from a first end of the housing to a second end of the housing;

disposing at least one connector within at least of the first end and the second end, the at least one connector adapted to connect the lighting unit to a similar lighting unit while allowing the two lighting units to be placed end to end without spacing therebetween; and

20

providing a thermal facility for removing heat from a proximity of the plurality of LED light sources.

25 118. The method of claim 117 wherein the plurality of LED light sources includes one or more red LEDs, one or more green LEDs, one or more blue LEDs, and one or more white LEDs.

119. The method of claim 117 wherein the plurality of LED light sources includes at least two white LEDs that emit different color temperatures of white light.

30

-162-

120. The method of claim 117 wherein the plurality of LED light sources includes one or more blue LEDs that include a phosphor.

121. The method of claim 117 wherein the plurality of LED light sources includes at
5 least one white LED and at least one amber LED.

122. The method of claim 117 wherein the plurality of LED light sources includes one or more ultraviolet LEDs and one or more phosphors.

10 123. The method of claim 117 further comprising providing a lens, the lens including an optical facility for operating on light emitted from the plurality of LED light sources.

124. The method of claim 123 wherein the optical facility includes a phosphor for shifting a wavelength of light from one or more of the plurality of LEDs.

15

125. The method of claim 117 wherein the thermal facility includes an interior cavity of the housing for moving air within the housing.

126. The method of claim 117 wherein the thermal facility includes a vent for
20 releasing air from an interior of the housing to an exterior of the housing.

127. The method of claim 117 wherein the thermal facility includes one or more fins for radiating heat from the housing.

25 128. The method of claim 117 wherein the thermal facility includes a heat-conducting mass integral to the housing.

129. The method of claim 117 wherein the thermal facility includes a potting facility for receiving heat from the circuit board.

30

130. The method of claim 117 wherein the thermal facility includes a metal plate.

-163-

131. The method of claim 117 wherein the plurality of LEDs includes at least one high-brightness LED.

5 132. The method of claim 117 further comprising a lens disposed in a slot above the array.

133. The method of claim 132 wherein a profile of the lens is co-planar with a top of the housing.

10

134. The method of claim 132 wherein the lens is sealed to prevent a user from accessing the plurality of LEDs.

15

135. The method of claim 132 further comprising a power facility that provides power to the plurality of LEDs.

136. The method of claim 135 wherein the power facility includes a high-voltage power facility.

20

137. The method of claim 135 wherein the power facility includes a power-factor-corrected power facility.

138. The method of claim 135 wherein the power facility includes an on-board power facility.

25

139. The method of claim 135 wherein the power facility includes an inductively controlled power facility.

30

140. The method of claim 135 wherein the power facility includes a feed-forward power facility.

-164-

141. The method of claim 135 wherein the power facility includes a power/data power facility.

142. The method of claim 117 wherein the lighting unit is a networked lighting unit.

143. The method of claim 142 wherein the lighting unit is addressed using a serial addressing protocol.

144. The method of claim 117 wherein the lighting unit is an addressable lighting unit.

145. The method of claim 144 wherein the lighting unit is addressed using a determination algorithm.

146. A lighting unit system, comprising:

a housing, the housing being substantially linear and the housing including a slot for receiving an array of a plurality of LED light sources, the plurality of LED light sources capable of producing substantially white light, and the array disposed on a circuit board within the housing;

an interior power/data feed from a first end of the housing to a second end of the housing;

at least one connector within at least one of the first end and the second end adapted to connect the lighting unit to a similar lighting unit while allowing the two lighting units to be placed end to end without spacing therebetween; and

a thermal facility for removing heat from a proximity of the plurality of LED light sources.

147. The system of claim 146 wherein the plurality of LED light sources includes one or more red LEDs, one or more green LEDs, one or more blue LEDs, and one or more white LEDs.

-165-

148. The system of claim 146 wherein the plurality of LED light sources includes at least two white LEDs that emit different color temperatures of white light.

149. The system of claim 146 wherein the plurality of LED light sources includes one
5 or more blue LEDs that include a phosphor.

150. The system of claim 146 wherein the plurality of LED light sources includes at least one white LED and at least one amber LED.

10 151. The system of claim 146 wherein the plurality of LED light sources includes one or more ultraviolet LEDs and one or more phosphors.

152. The system of claim 146 further comprising a lens, the lens including an optical facility for operating on light emitted from the plurality of LED light sources.
15

153. The system of claim 152 wherein the optical facility includes a phosphor for shifting a wavelength of light from one or more of the plurality of LEDs.

154. The system of claim 146 wherein the thermal facility includes an interior cavity
20 of the housing for moving air within the housing.

155. The system of claim 146 wherein the thermal facility includes a vent for releasing air from an interior of the housing to an exterior of the housing.

25 156. The system of claim 146 wherein the thermal facility includes one or more fins for radiating heat from the housing.

157. The system of claim 146 wherein the thermal facility includes a heat-conducting mass integral to the housing.
30

-166-

158. The system of claim 146 wherein the thermal facility includes a potting facility for receiving heat from the circuit board.

159. The system of claim 146 wherein the thermal facility includes a metal plate.

5

160. The system of claim 146 wherein the plurality of LEDs includes at least one high-brightness LED.

10

161. The system of claim 146 further comprising a lens disposed in a slot above the array.

162. The system of claim 161 wherein a profile of the lens is co-planar with a top of the housing.

15

163. The system of claim 161 wherein the lens is sealed to prevent a user from accessing the plurality of LEDs.

20

164. The system of claim 146 further comprising a power facility that provides power to the plurality of LEDs.

165. The system of claim 164 wherein the power facility includes a high-voltage power facility.

25

166. The system of claim 164 wherein the power facility includes a power-factor-corrected power facility.

167. The system of claim 164 wherein the power facility includes an on-board power facility.

30

168. The system of claim 164 wherein the power facility includes an inductively controlled power facility.

-167-

169. The system of claim 164 wherein the power facility includes a feed-forward power facility.

5 170. The system of claim 164 wherein the power facility includes a power/data power facility.

171. The system of claim 146 wherein the lighting unit is a networked lighting unit.

10 172. The system of claim 171 wherein the lighting unit is addressed using a serial addressing protocol.

173. The system of claim 146 wherein the lighting unit is an addressable lighting unit.

15 174. The system of claim 173 wherein the lighting unit is addressed using a determination algorithm.

175. A method of providing a circuit board for a lighting system, comprising:
providing a circuit board;
20 disposing a plurality of LEDs on the circuit board; and
disposing a plurality of control facilities on the circuit board and connecting the plurality of control facilities in a series, each one of the control facilities controlling at least one of the plurality of LEDs, and each one of the control facilities being an addressable control facility that responds to data according to a serial addressing
25 protocol.

176. A method according to claim 175, wherein one of the control facilities in the series responds to a first unmodified byte in a data stream, modifies the first unmodified byte to provide a modified data stream, and sends the modified data stream to a next
30 control facility in the series.

-168-

177. A method according to claim 175, wherein each one of the plurality of control facilities is an application specific integrated circuit.

178. A method according to claim 175, wherein each one of the plurality of control
5 facilities controls three LEDs.

179. A method according to claim 178, wherein the three LEDs are LEDs of three different colors.

10 180. A method according to claim 179, wherein the three colors are red, green and blue.

181. A method according to claim 175, wherein the plurality of LEDs substantially serve to illuminate a surrounding space.

15

182. A method according to claim 175, wherein the plurality of LEDs substantially serve to be viewed directly.

183. A method according to claim 175, wherein the plurality of control facilities is
20 disposed in a rectangular array.

184. A method according to claim 183, wherein the rectangular array is a three-by-three array.

25 185. A method according to claim 184, wherein the three-by-three array has dimensions of about six inches by about six inches.

186. A method according to claim 184, wherein the three-by-three array has dimensions of about one foot by about one foot.

30

187. A method according to claim 184, wherein the array is a four-by-four array.

-169-

188. A method according to claim 184, wherein the array is a five-by-five array.

189. A method according to claim 184, wherein the array is a six-by-six array.

5

190. A method according to claim 189, wherein the six-by-six array has dimensions of about six inches by about six inches.

10

191. A method according to claim 189, wherein the six-by-six array has dimensions of about one foot by about one foot.

15

192. A method according to claim 175, further comprising disposing a plurality of substantially rectangular circuit boards that contain substantially rectangular arrays of control facilities in an array of such rectangular circuit boards.

193. A method according to claim 192, wherein the array of such rectangular circuit boards is roughly spherical.

20

194. A method according to claim 193, wherein the array of such rectangular circuit boards is roughly cylindrical.

195. A method according to claim 193, wherein the array of such rectangular circuit boards is roughly semicylindrical.

25

196. A method according to claim 175, further comprising disposing a plurality of substantially triangular circuit boards that contain substantially triangular arrays of control facilities in an array of such triangular circuit boards.

30

197. A method according to claim 175, further comprising providing a protective lens for the circuit board.

-170-

198. A method according to claim 175, further comprising providing a lens fitted on the circuit board serving to shape the light coming from the LEDs.

199. A method according to claim 175, further comprising providing a diffuser fitted on the circuit serving to diffuse the light coming from the LEDs.

200. A device comprising:

a circuit board for a lighting system;

a plurality of LEDs disposed on the circuit board; and

a plurality of control facilities disposed on the circuit board and connected in a series, each one of the plurality of control facilities being an addressable control facility adapted to control at least one of the plurality of LEDs and to respond to data according to a serial addressing protocol.

201. A device according to claim 200, wherein one of the control facilities in the series responds to a first unmodified byte in a data stream, modifies the first unmodified byte to provide a modified data stream, and sends the modified data stream to a next control facility in the series.

202. A device according to claim 200, wherein each one of the plurality of control facilities is an application specific integrated circuit.

203. A device according to claim 200, wherein each one of the plurality of control facilities controls three LEDs.

204. A device according to claim 203, wherein the three LEDs are LEDs of three different colors.

205. A device according to claim 204, wherein the three colors are red, green and blue.

-171-

206. A device according to claim 200, wherein the plurality of LEDs substantially serve to illuminate a surrounding space.

207. A device according to claim 200, wherein the plurality of LEDs substantially
5 serve to be viewed directly.

208. A device according to claim 200, wherein the plurality of control facilities is disposed in a rectangular array.

10 209. A device according to claim 208, wherein the rectangular array is a three-by-three array.

210. A device according to claim 209, wherein the three-by-three array has dimensions of about six inches by about six inches.

15 211. A device according to claim 209, wherein the three-by-three array has dimensions of about one foot by about one foot.

212. A device according to claim 208, wherein the array is a four-by-four array.

20 213. A device according to claim 208, wherein the array is a five-by-five array.

214. A device according to claim 208, wherein the array is a six-by-six array.

25 215. A device according to claim 214, wherein the six-by-six array has dimensions of about six inches by about six inches.

216. A device according to claim 214, wherein the six-by-six array has dimensions of about one foot by about one foot.

30

-172-

217. A device according to claim 200, further comprising a plurality of substantially rectangular circuit boards that contain substantially rectangular arrays of control facilities disposed in in an array of such rectangular circuit boards.

5 218. A device according to claim 217, wherein the array of such rectangular circuit boards is roughly spherical.

219. A device according to claim 217, wherein the array of such rectangular circuit boards is roughly cylindrical.

10

220. A device according to claim 217, wherein the array of such rectangular circuit boards is roughly semicylindrical.

15

221. A device according to claim 200, further comprising a plurality of substantially triangular circuit boards that contain substantially triangular arrays of control facilities disposed in an array of such triangular circuit boards.

222. A device according to claim 200, further comprising a protective lens for the circuit board.

20

223. A device according to claim 200, further comprising a lens fitted on the circuit board serving to shape light emitted from the LEDs.

25

224. A device according to claim 200, further comprising a diffuser fitted on the circuit board serving to diffuse light emitted from the LEDs.

225. A method of providing a circuit board for a lighting system, comprising:
providing a circuit board;
disposing a plurality of LEDs on the circuit board;
30 disposing a plurality of control facilities on the circuit board;

-173-

connecting each one of the plurality of control facilities to at least one of the plurality of LEDs to control operation thereof; and

connecting the plurality of control facilities to one another in a series, wherein each one of the plurality of control facilities responds to data according to a serial
5 addressing protocol.

226. A method according to 225, wherein one of the plurality of control facilities responds to a first unmodified byte in a data stream, modifies the first unmodified byte to provide a modified data stream, and transmits the modified data stream to a next one of
10 the plurality of control facilities in the series.

227. A method according to 225, wherein at least one of the plurality of control facilities is an application specific integrated circuit.

15 228. A method according to 225, wherein at least one of the plurality of control facilities controls three LEDs.

229. A method according to 228, wherein the three LEDs are LEDs of three different colors.
20

230. A method according to 229, wherein the three different colors are red, green and blue.

231. A method according to 225, wherein the plurality of LEDs substantially serve to
25 illuminate a surrounding space.

232. A method according to 225, wherein the plurality of LEDs substantially serve to be viewed directly.

-174-

233. A method according to 225, wherein the circuit board is supplied with an interface for providing both a physical connection and a data connection to another circuit board.

5 234. A method according to 233, wherein the physical connection includes an interlocking tab configuration.

235. A method according to 233, wherein the physical connection includes a magnet.

10 236. A method according to 233, wherein the physical connection includes a connector.

237. A method according to 236, wherein the connector includes a jack.

15 238. A method according to 225, wherein a plurality of circuit boards are interlocked to form an array.

239. A method according to 238, wherein the array provides accurate and precise positioning of the LEDs on the plurality of circuit boards relative to one another.

20

240. A method according to 238, wherein the interlocking enables the production of a physical shape.

241. A method according to 225, wherein the addressable control facilities are
25 individually addressable.

242. A method according to 241, wherein individually addressing the addressable control facilities enables an appearance that differs from varying points of view.

30 243. A method according to 225, wherein the circuit board is triangular.

-175-

244. A method according to 243, further comprising connecting a plurality of triangular circuit boards to create a substantially spherical configuration.

245. A method according to 244, wherein the configuration serves as a luminaire.

5

246. A method according to 244, wherein the plurality of LEDs include narrow-angle light emitters.

247. A method according to 244, wherein the plurality of LEDs include medium-angle
10 light emitters.

248. A method according to 244, wherein the plurality of LEDs include narrow-angle emitters and medium-angle light emitters.

15 249. A method according to 244, wherein the plurality of LEDs include linear emitters.

250. A method according to 244, wherein the LEDs point radially outward from the center of the spherical configuration.

20

251. A method according to 243, further comprising connecting a plurality of triangular circuit boards to create a substantially cylindrical configuration.

252. A method according to 251, wherein the configuration serves as a luminaire.

25

253. A method according to 251, wherein the LEDs are linear emitters.

254. A method according to 251, wherein the LEDs point radially outward.

30 255. A method according to 243, further comprising connecting a plurality of triangular circuit boards to create a substantially half-cylinder.

-176-

256. A method according to 255, wherein the configuration serves as a luminaire.

257. A method according to 255, wherein the LEDs are linear emitters.

5

258. A method according to 255, wherein the LEDs point inward.

259. A method according to 258, wherein beams emitted by the LEDs cross as they exit the half-cylinder.

10

260. A method according to 243, further comprising connecting a plurality of triangular circuit boards to create an appreciably planar configuration.

261. A method according to 260, wherein the configuration is, on an edge of the configuration, connected to another configuration.

15

262. A method according to 243, further comprising connecting a plurality of triangular circuit boards to create a configuration that occupies a certain volume.

263. A method according to 262, wherein the configuration is, on a surface of the configuration, connected to another configuration.

20

264. A method according to 262, wherein the configuration is, on a face of the configuration, connected to another configuration.

25

265. A method according to 243, further comprising connecting a plurality of triangular circuit boards to create a tessellation.

266. A method according to 225, wherein the circuit board is rectangular.

30

-177-

267. A method according to 266, wherein the control facilities are disposed in a rectangular array.

268. A method according to 267, wherein the array is a three-by-three array.

5

269. A method according to 268, wherein the three-by-three array has dimensions of about six inches by about six inches.

270. A method according to 268, wherein the three-by-three array has dimensions of about one foot by about one foot.

10

271. A method according to 267, wherein the array is a four-by-four array.

272. A method according to 267, wherein the array is a five-by-five array.

15

273. A method according to 267, wherein the array is a six-by-six array.

274. A method according to 273, wherein the six-by-six array has dimensions of about six inches by about six inches.

20

275. A method according to 273, wherein the array has dimensions of about one foot by about one foot.

276. A method according to 225, further comprising disposing a plurality of substantially rectangular circuit boards that contain substantially rectangular arrays of control facilities in an array of such rectangular circuit boards.

25

277. A method according to 276, wherein the array of such rectangular circuit boards is roughly spherical.

30

-178-

278. A method according to 276, wherein the array of such rectangular circuit boards is roughly cylindrical.

5 279. A method according to 276, wherein the array of such rectangular circuit boards is roughly semicylindrical.

280. A method according to 225, further comprising supplying the circuit board with a plurality of tabs for allowing circuit boards to be connected.

10 281. A method according to 280, wherein the tabs permit the circuit boards to be connected in the same plane.

282. A method according to 281, wherein the tabs also permit connection of circuit boards that are in different planes.

15

283. A method according to 280, wherein the tabs permit the connection of circuit boards that are in different planes.

284. A method according to 282, wherein the planes vary by ninety degrees.

20

285. A method according to 282, wherein the planes vary by an amount different than ninety degrees.

286. A method according to 283, wherein the planes vary by ninety degrees.

25

287. A method according to 283, wherein the planes vary by an amount different than ninety degrees.

30 288. A method according to 225, further comprising supplying the circuit board with a magnetic facility for allowing circuit boards to be connected.

-179-

289. A method according to 288, wherein the magnetic facility is disposed along the side of the circuit board.

290. A method according to 288, wherein the magnetic facility provides a magnetic
5 connection.

291. A method according to 288, wherein the magnetic facility provides a power interface between the circuit board and another such circuit board.

10 292. A method according to 288, wherein the magnetic facility provides a data interface between the circuit board and another such circuit board.

293. A method according to 288, wherein the magnetic facility permits the circuit boards to be connected in the same plane.

15

294. A method according to 293, wherein the magnetic facility also permits connection of circuit boards that are in different planes.

295. A method according to 288, wherein the magnetic facility permits connection of
20 circuit boards that are in different planes.

296. A method according to 294, wherein the planes vary by ninety degrees.

297. A method according to 294, wherein the planes vary by an amount different than
25 ninety degrees.

298. A method according to 295, wherein the planes vary by ninety degrees.

299. A method according to 295, wherein the planes vary by an amount different than
30 ninety degrees.

-180-

300. A method according to 225, further comprising supplying the circuit board with a fastening facility for allowing circuit boards to be connected.

5 301. A method according to 300, wherein the fastening facility is a ball and socket combination.

302. A method according to 300, wherein the fastening facility is an adhesive.

10 303. A method according to 300, wherein the fastening facility is a tape.

304. A method according to 300, wherein the fastening facility is an interlocking shape.

15 305. A method according to 300, wherein the fastening facility is an interlocking edge.

306. A method according to 300, wherein the fastening facility is a tab.

20 307. A method according to 300, wherein the fastening facility is a solderable finger joint.

308. A method according to 300, wherein the fastening facility permits the circuit boards to be connected in the same plane.

25 309. A method according to 308, wherein the fastening facility also permits connection of circuit boards that are in different planes.

310. A method according to 300, wherein the fastening facility permits connection of circuit boards that are in different planes.

30 311. A method according to 309, wherein the planes vary by ninety degrees.

-181-

312. A method according to 309, wherein the planes vary by an amount different than ninety degrees.

313. A method according to 310, wherein the planes vary by ninety degrees.

5

314. A method according to 310, wherein the planes vary by an amount different than ninety degrees.

315. A method according to 225, further comprising supplying the circuit board with a
10 dedicated input pad and a dedicated output pad.

316. A method according to 225, further comprising providing a protective cover for the printed circuit board.

15 317. A method according to 316, wherein the cover includes a space providing a viewer with direct viewing of one of the LEDs without having light pass through the cover.

318. A method according to 316, wherein the cover is a sealed cover.

20

319. A method according to 318, wherein the sealed cover provides for underwater operation of the circuit board.

320. A method according to 318, wherein the sealed cover provides a sealed housing.

25

321. A method according to 320, wherein the sealed housing is oil-filled.

322. A method according to 321, wherein the oil is clear.

30 323. A method according to 321, where the oil serves as a thermal facility.

-182-

324. A method according to 321, wherein the oil serves as an optical facility.

325. A method according to 321, wherein the oil serves as a thermal facility and an optical facility.

5

326. A method according to 321, wherein the oil contains a non-conductive particulate.

10 327. A method according to 326, wherein the non-conductive particulate serves to diffuse the light coming from the LEDs.

328. A method according to 225, further comprising supplying a lens fitted on the printed circuit board serving to shape the light coming from the LEDs.

15 329. A method according to 328, wherein the lens is an interchangeable lens.

330. A method according to 329, wherein the interchangeable lens is a snap-in lens.

20 331. A method according to 225, further comprising supplying a diffuser fitted on the printer circuit serving to diffuse the light coming from the LEDs.

332. A method according to 331, wherein the diffuser is an interchangeable diffuser.

25 333. A method according to 332, wherein the interchangeable diffuser is a snap-in diffuser.

334. A method according to 225, further comprising supplying a jack for taking in power and data from a source.

30 335. A method according to 334, wherein the source is a central controller.

-183-

336. A method according to 334, wherein the source is another such circuit board.

337. A method according to 225, further comprising supplying a jack for sending power and data out to a destination.

5

338. A method according to 337, wherein the destination is another such circuit board.

339. A method according to 225, further comprising supplying a Dipline-style mounting panel.

10

340. A method according to 339, wherein the mounting panel allows the circuit board to be placed anywhere on a surface.

341. A method according to 225, further comprising supplying an integrated hash mark for aligning the circuit board during installation.

15

342. A method according to 225, further comprising supplying an integrated laser level to facilitate accurate installation.

343. A method according to 225, further comprising supplying a modular attached pin connector providing contact with a selected conductive layer within a layered surface of conductors.

20

344. A method according to 343, wherein the layered surface of conductors is a Dipline-style surface material.

25

345. A method according to 225, further comprising supplying a sensor that is operatively coupled to the circuit board.

346. A method according to 345, wherein the sensor is disposed on the circuit board.

30

-184-

347. A method according to 345, wherein the sensor is coupled via a wire to the circuit board.

5 348. A method according to 345, wherein the sensor is coupled via a wireless facility to the circuit board.

349. A method according to 345, wherein the sensor is a yaw sensor.

10 350. A method according to 345, wherein the sensor is a pitch sensor.

351. A method according to 345, wherein the sensor is a roll sensor.

15 352. A method according to 345, wherein the sensor is a two-axis sensor, the two axes being selected from the group of yaw, pitch, and roll.

353. A method according to 345, wherein the sensor is a three-axis sensor.

354. A method according to 353, wherein the three axes are roll, pitch, and yaw.

20 355. A method according to 345, wherein the sensor is a global positioning system.

356. A method according to 345, wherein the sensor is a inclinometer.

25 357. A method according to 345, wherein the sensor is a gyroscope.

358. A method according to 345, wherein the sensor functions as though it is a gyroscope.

30 359. A method according to 345, wherein the sensor is an inertial navigation sensor.

360. A method according to 345, wherein the sensor is a dead reckoning device.

-185-

361. A method according to 345, wherein the sensor detects motion.

362. A method according to 225, wherein the circuit board is operatively coupled to a
5 plurality of other such circuit boards, thus forming an array of circuit boards.

363. A method according to 362, wherein the array of circuit boards is attached to a
wall with a mounting cleat.

10 364. A method according to 363, wherein the mounting cleat is disposed in proximity
to a power supply.

365. A method according to 363, wherein the mounting cleat is disposed in proximity
to a data supply.

15

366. A method according to 363, wherein the mounting cleat has an integrated
electrical connection as well as power.

367. A method according to 363, wherein the mounting cleat comprises small ridges.

20

368. A method according to 367, wherein the small ridges provide electrical
connection for both power and data.

369. A method according to 368, wherein the small ridges are shaped horizontally.

25

370. A method according to 368, wherein the small ridges are shaped vertically.

371. A method according to 225, further comprising supplying an attachment to an
electrical junction box.

30

-186-

372. A method according to 225, further comprising providing a thermally conductive gap pad to hold heat away from the LEDs.

373. A method according to 225, further comprising providing an electrical rail.

5

374. A method according to 373, wherein the electrical rail is a power rail.

375. A method according to 374, wherein the electrical rail is a data rail.

10 376. A method according to 373, wherein a plurality of electrical rails are provided in a grid format.

377. A method according to 373, wherein the electrical rail serves as a track.

15 378. A method according to 377, wherein the circuit board snaps into the track.

379. A method according to 225, further comprising providing live feedback during installation.

20 380. A method according to 379, wherein the feedback is a blinking light.

381. A method according to 379, wherein the feedback is the emission of a particular color of light.

25 382. A method according to 379, wherein the feedback is in relation to reaching a maximum number of units per power supply.

383. A method according to 379, wherein the feedback is based upon position within a respect to another such circuit boards.

30

-187-

384. A method according to 379, wherein the feedback is based upon a geometric orientation of the circuit board.

5 385. A method according to 384, wherein the geometric orientation of the circuit board is measured by a sensor.

386. A circuit board for a lighting system, comprising:
a circuit board;
a plurality of LEDs disposed on the circuit board; and
10 a plurality of control facilities connected in a series, each one of the plurality of control facilities adapted to control at least one of the plurality of LEDs, and each one of the plurality of control facilities being an addressable control facility adapted to respond to data according to a serial addressing protocol.

15 387. A device according to claim 386, wherein a control facility in the series is adapted to respond to the first unmodified byte in a data stream, modify that byte, and send the modified data stream to the next control facility in the series.

20 388. A device according to claim 386, wherein each control facility is an application specific integrated circuit.

389. A device according to claim 386, wherein each control facility is adapted to control three LEDs.

25 390. A device according to claim 389, wherein the LEDs are LEDs of three different colors.

391. A device according to claim 390, wherein the three colors are red, green and blue.

30 392. A device according to claim 386, wherein the LEDs are adapted to illuminate a surrounding space.

-188-

393. A device according to claim 386, wherein the LEDs are adapted to be viewed directly.

5 394. A device according to claim 386, wherein the circuit board comprises an interface for providing both a physical connection and a data connection to another circuit board.

395. A device according to claim 394, wherein the physical connection is an interlocking tab configuration.

10

396. A device according to claim 394, wherein the physical connection includes a magnet.

15

397. A device according to claim 394, wherein the physical connection includes a connector.

398. A device according to claim 397, wherein the connector is a jack.

20

399. A device according to claim 386, wherein a plurality of circuit boards are interlocked to form an array.

400. A device according to claim 399, wherein the interlocking is adapted to provide accurate and precise positioning of the LEDs.

25

401. A device according to claim 399, wherein the interlocking is adapted to provide the production of a physical shape.

402. A device according to claim 386, wherein the addressable control facilities are adapted to be individually addressable.

30

-189-

403. A device according to claim 402, wherein the individual addressing the addressable control facilities provides an appearance that differs from varying points of view.

5 404. A device according to claim 386, wherein the circuit board is triangular.

405. A device according to claim 404, further comprising a plurality of triangular circuit boards connected in a substantially spherical configuration.

10 406. A device according to claim 405, wherein the configuration is adapted to serve as a luminaire.

407. A device according to claim 405, wherein the LEDs are narrow-angle light emitters.

15

408. A device according to claim 405, wherein the LEDs are medium-angle light emitters.

20 409. A device according to claim 405, wherein the LEDs are a mix of narrow-angle and medium-angle light emitters.

410. A device according to claim 405, wherein the LEDs are linear emitters.

25 411. A device according to claim 405, wherein the LEDs point radially outward from the center of the spherical configuration.

412. A device according to claim 404, further comprising a plurality of triangular circuit boards connected in a substantially cylindrical configuration.

30 413. A device according to claim 412, wherein the configuration is adapted to serve as a luminaire.

-190-

414. A device according to claim 412, wherein the LEDs are linear emitters.

415. A device according to claim 412, wherein the LEDs point radially outward.

5

416. A device according to claim 404, further comprising a plurality of triangular circuit boards connected in a substantially half-cylinder configuration.

417. A device according to claim 416, wherein the configuration is adapted to serve as a luminaire.

10

418. A device according to claim 416, wherein the LEDs are linear emitters.

419. A device according to claim 416, wherein the LEDs point inward.

15

420. A device according to claim 419, wherein beams emitted by the LEDs cross as they exit the half-cylinder.

421. A device according to claim 404, further comprising a plurality of triangular circuit boards connected in an appreciably planar configuration.

20

422. A device according to claim 421, wherein the configuration is, on an edge of the configuration, connected to another configuration.

423. A device according to claim 404, further comprising connecting a plurality of triangular circuit boards to occupies a certain volume.

25

424. A device according to claim 423, wherein the configuration is, on a surface of the configuration, connected to another configuration.

30

-191-

425. A device according to claim 423, wherein the configuration is, on a face of the configuration, connected to another configuration.

5 426. A device according to claim 404, further comprising a plurality of triangular circuit boards connected in a tessellated configuration.

427. A device according to claim 386, wherein the circuit board is rectangular.

10 428. A device according to claim 427, wherein the control facilities are disposed in a rectangular array.

429. A device according to claim 428, wherein the array is a three-by-three array.

15 430. A device according to claim 429, wherein the three-by-three array has dimensions of about six inches by about six inches.

431. A device according to claim 429, wherein the three-by-three array has dimensions of about one foot by about one foot.

20 432. A device according to claim 428, wherein the array is a four-by-four array.

433. A device according to claim 428, wherein the array is a five-by-five array.

25 434. A device according to claim 428, wherein the array is a six-by-six array.

435. A device according to claim 434, wherein the six-by-six array has dimensions of about six inches by about six inches.

30 436. A device according to claim 434, wherein the array has dimensions of about one foot by about one foot.

-192-

437. A device according to claim 386, further comprising a plurality of substantially rectangular circuit boards that contain substantially rectangular arrays of control facilities, wherein said plurality of substantially rectangular circuit boards are disposed in an array of such rectangular circuit boards.

5

438. A device according to claim 437, wherein the array of such rectangular circuit boards is roughly spherical.

439. A device according to claim 437, wherein the array of such rectangular circuit
10 boards is roughly cylindrical.

440. A device according to claim 437, wherein the array of such rectangular circuit boards is roughly semicylindrical.

15 441. A device according to claim 386, further comprising supplying a plurality of tabs, associated with the circuit board, for allowing circuit boards to be connected.

442. A device according to claim 441, wherein the tabs are adapted to permit the circuit boards to be connected in the same plane.

20

443. A device according to claim 442, wherein the tabs are also adapted to permit connection of circuit boards that are in different planes.

444. A device according to claim 441, wherein the tabs are adapted to permit the
25 connection of circuit boards that are in different planes.

445. A device according to claim 443, wherein the planes vary by ninety degrees.

446. A device according to claim 443, wherein the planes vary by an amount different
30 than ninety degrees.

-193-

447. A device according to claim 444, wherein the planes vary by ninety degrees.

448. A device according to claim 444, wherein the planes vary by an amount different than ninety degrees.

5

449. A device according to claim 386, further comprising a magnetic facility, associated with the circuit board, for allowing circuit boards to be connected.

450. A device according to claim 449, wherein the magnetic facility is disposed along
10 the side of the circuit board.

451. A device according to claim 449, wherein the magnetic facility is adapted to provide a magnetic connection.

15 452. A device according to claim 449, wherein the magnetic facility is adapted to provide a power interface between the circuit board and another such circuit board.

453. A device according to claim 449, wherein the magnetic facility is adapted to provide a data interface between the circuit board and another such circuit board.

20

454. A device according to claim 449, wherein the magnetic facility is adapted to permit the circuit boards to be connected in the same plane.

455. A device according to claim 454, wherein the magnetic facility is also adapted to
25 permit connection of circuit boards that are in different planes.

456. A device according to claim 449, wherein the magnetic facility is adapted to permit connection of circuit boards that are in different planes.

30 457. A device according to claim 455, wherein the planes vary by ninety degrees.

-194-

458. A device according to claim 455, wherein the planes vary by an amount different than ninety degrees.

459. A device according to claim 456, wherein the planes vary by ninety degrees.

5

460. A device according to claim 456, wherein the planes vary by an amount different than ninety degrees.

461. A device according to claim 386, further comprising a fastening facility,
10 associated with the circuit board, for allowing circuit boards to be connected.

462. A device according to claim 461, wherein the fastening facility is a ball and socket combination.

15 463. A device according to claim 461, wherein the fastening facility is an adhesive.

464. A device according to claim 461, wherein the fastening facility is a tape.

465. A device according to claim 461, wherein the fastening facility is an interlocking
20 shape.

466. A device according to claim 461, wherein the fastening facility is an interlocking edge.

25 467. A device according to claim 461, wherein the fastening facility is a tab.

468. A device according to claim 461, wherein the fastening facility is a solderable finger joint.

30 469. A device according to claim 461, wherein the fastening facility is adapted to permit the circuit boards to be connected in the same plane.

-195-

470. A device according to claim 469, wherein the fastening facility is adapted to permit connection of circuit boards that are in different planes.

5 471. A device according to claim 461, wherein the fastening facility is adapted to permit the connection of circuit boards that are in different planes.

472. A device according to claim 471, wherein the planes vary by ninety degrees.

10 473. A device according to claim 471, wherein the planes vary by an amount different than ninety degrees.

474. A device according to claim 386, further comprising a dedicated input pad and a dedicated output pad, both of which are associated with the circuit board.

15

475. A device according to claim 386, further comprising a protective cover for the printed circuit board.

476. A device according to claim 475, wherein the cover includes a space adapted to provide a viewer with direct viewing of one of the LEDs without having light pass through the cover.

20

477. A device according to claim 475, wherein the cover is a sealed cover

25 478. A device according to claim 477, wherein the sealed cover is adapted to provide for underwater operation of the circuit board

479. A device according to claim 477, wherein the sealed cover is adapted to provide a sealed housing

30

480. A device according to claim 479, wherein the sealed housing is oil-filled

-196-

481. A device according to claim 480, wherein the oil is clear

482. A device according to claim 480, where the oil serves as one or more of a thermal
5 facility and an optical facility.

483. A device according to claim 480, wherein the oil contains a non-conductive
particulate.

10 484. A device according to claim 483, wherein the non-conductive particulate is
adapted to diffuse the light coming from the LEDs.

485. A device according to claim 386, further comprising a lens fitted on the printed
circuit board, said lens adapted to shape the light coming from the LEDs.

15 486. A device according to claim 485, wherein the lens is an interchangeable lens.

487. A device according to claim 486, wherein the interchangeable lens is a snap-in
lens.

20 488. A device according to claim 386, further comprising a diffuser fitted on the
printer circuit, wherein the diffuser is adapted to diffuse the light coming from the LEDs.

489. A device according to claim 488, wherein the diffuser is an interchangeable
25 diffuser.

490. A device according to claim 489, wherein the interchangeable diffuser is a snap-
in diffuser.

30 491. A device according to claim 386, further comprising a jack adapted for taking in
power and data from a source.

-197-

492. A device according to claim 395, wherein the source includes one or more of an other circuit board or a central controller.

5 493. A device according to claim 386, further comprising supplying a jack adapted for sending power and data out to a destination.

494. A device according to claim 493, wherein the destination is another such circuit board.

10

495. A device according to claim 386, further comprising a Dipline-style mounting panel.

15

496. A device according to claim 495, wherein the mounting panel is adapted to allow the circuit board to be placed anywhere on a surface.

497. A device according to claim 386, further comprising an integrated hash mark adapted for aligning the circuit board during installation.

20

498. A device according to claim 386, further comprising an integrated laser level adapted to facilitate accurate installation.

25

499. A device according to claim 386, further comprising a modular attached pin connector adapted for providing contact with a selected conductive layer within a layered surface of conductors.

500. A device according to claim 499, wherein the layered surface of conductors is a Dipline-style surface material.

30

501. A device according to claim 386, further comprising a sensor that is operatively coupled to the circuit board.

-198-

502. A device according to claim 501, wherein the sensor is disposed on the circuit board.

5 503. A device according to claim 501, wherein the sensor is coupled via a wire to the circuit board.

504. A device according to claim 501, wherein the sensor is coupled via a wireless facility to the circuit board.

10

505. A device according to claim 501, wherein the sensor includes at least one of a yaw sensor, a pitch sensor, and a roll sensor.

15 506. A device according to claim 501, wherein the sensor is a two-axis sensor, the two axes being selected from the group of yaw, pitch, roll.

507. A device according to claim 501, wherein the sensor is a three-axis sensor.

20 508. A device according to claim 507, wherein the three axes are roll, pitch, and yaw.

509. A device according to claim 501, wherein the sensor includes at least one of a global positioning system, an inclinometer, and a gyroscope.

25 510. A device according to claim 501, wherein the sensor functions as though it is a gyroscope.

511. A device according to claim 501, wherein the sensor includes at least one of an inertial navigation sensor, and a dead reckoning device.

30 512. A device according to claim 501, wherein the sensor detects motion.

-199-

513. A device according to claim 386, wherein the circuit board is operatively coupled to a plurality of other such circuit boards, thus forming an array of circuit boards.

514. A device according to claim 513, wherein the array of circuit boards is attached
5 to a wall with a mounting cleat.

515. A device according to claim 514, wherein the mounting cleat is disposed in proximity to at least one of a power supply and a data supply.

10 516. A device according to claim 514, wherein the mounting cleat has an integrated electrical connection as well as power.

517. A device according to claim 514, wherein the mounting cleat comprises small
ridges.

15

518. A device according to claim 517, wherein the small ridges provide electrical connection for both power and data, the small ridges being oriented at least one of horizontally and vertically.

20 519. A device according to claim 386, further comprising an attachment to an electrical junction box.

520. A device according to claim 386, further comprising a thermally conductive gap pad to hold heat away from the LEDs.

25

521. A device according to claim 386, further comprising an electrical rail, the electric rail including at least one of a power rail and a data rail.

522. A device according to claim 521, wherein a plurality of electrical rails are
30 provided in a grid format.

-200-

523. A device according to claim 521, wherein the electrical rail serves as a track.

524. A device according to claim 523, wherein the circuit board snaps into the track.

5 525. A device according to claim 386, further comprising a mechanism for providing live feedback during installation.

526. A device according to claim 525, wherein the feedback is one or more of a
blinking light, an emission of a particular color of light, or an indication of reaching a
10 maximum number of units per power supply.

527. A device according to claim 525, wherein the feedback is based upon at least one
of a position with respect to another such circuit board or a geometric orientation of the
circuit board.

15 528. A device according to claim 527, wherein a sensor, associated with the circuit board, is adapted to detect the geometric orientation of the board.

529. A method of providing a circuit board for a lighting system, comprising:
20 providing a substantially flexible substrate;
disposing a plurality of LEDs on the substrate; and
providing a control facility on the substrate for controlling the plurality of LEDs.

530. The method of claim 529, wherein the substrate includes a flexible band.

25 531. The method of claim 529, further comprising providing a power facility for the plurality of LEDs.

532. The method of claim 531, wherein the power facility includes a high-voltage
30 power facility.

-201-

533. The method of claim 532, wherein the power facility includes a power-factor-corrected power facility.

5 534. The method of claim 532, wherein the power facility includes an on-board power facility.

535. The method of claim 532, wherein the power facility includes an inductively controlled power facility.

10 536. The method of claim 532, wherein the power facility includes a feed-forward power facility.

15 537. The method of claim 532, wherein the power facility includes a power/data power facility.

538. The method of claim 531, further comprising providing a thermal facility for the circuit board.

20 539. The method of claim 538, wherein the thermal facility includes a potting compound.

540. The method of claim 538, wherein the thermal facility includes an epoxy.

25 541. A method of providing a flexible lighting system, comprising:
providing a plurality of circuit boards, each circuit board having disposed thereon a plurality of LEDs and a control facility for controlling the plurality of LEDs; and
providing a flexible connection between the circuit boards.

30 542. The method of claim 541, wherein the flexible connection includes an interlocking tab.

-202-

543. The method of claim 541, wherein the flexible connection includes a power/data connection.

544. The method of claim 541, wherein the flexible connection includes a data cable.

5

545. The method of claim 541, wherein the flexible connection includes a wire.

546. A circuit board system for a lighting system, comprising:

a substantially flexible substrate;

10 a plurality of LEDs on the substrate; and

a control facility on the substrate for controlling the plurality of LEDs.

547. The system of claim 546, wherein the substrate includes a flexible band.

15 548. The system of claim 546, further comprising providing a power facility for the plurality of LEDs.

549. The system of claim 548, wherein the power facility includes a high-voltage power facility.

20

550. The system of claim 549, wherein the power facility includes a power-factor-corrected power facility.

25 551. The system of claim 549, wherein the power facility includes an on-board power facility.

552. The system of claim 549, wherein the power facility includes an inductively controlled power facility.

30 553. The system of claim 549, wherein the power facility includes a feed-forward power facility.

-203-

554. The system of claim 549, wherein the power facility includes a power/data power facility.

5 555. The system of claim 548, further comprising a thermal facility for the circuit board.

556. The system of claim 555, wherein the thermal facility includes a potting compound.

10

557. The system of claim 555, wherein the thermal facility includes an epoxy.

558. A flexible lighting system, comprising:
a plurality of circuit boards, each circuit board having disposed thereon a
15 plurality of LEDs and a control facility for the plurality of LEDs; and
a flexible connection between the circuit boards.

559. The system of claim 558, wherein the flexible connection includes an interlocking tab.

20

560. The system of claim 558, wherein the flexible connection includes a power/data connection.

561. The system of claim 558, wherein the flexible connection includes a data cable.

25

562. The system of claim 558, wherein the flexible connection includes a wire.

563. A method of providing an optical facility for a lighting unit, comprising:
providing a circuit board;

30

disposing a plurality of LEDs on the circuit board; and

-204-

attaching an optical facility to the circuit board, the optical facility being an attachable optical facility.

564. The method of claim 563, wherein the optical facility includes a lens.

5

565. The method of claim 564, wherein the lens operates on light emitted from the plurality of LEDs.

10

566. The method of claim 565, wherein the optical facility includes a phosphor for shifting at least one wavelength of light emitted from the plurality of LEDs.

567. The method of claim 563, wherein the circuit board is rectangular and the plurality of LEDs are arranged in an array.

15

568. The method of claim 567, wherein the array is a three-by-three array.

569. The method of claim 568, wherein the array has dimensions of about six inches by about six inches.

20

570. The method of claim 568, wherein the array has dimensions of about one foot by about one foot.

571. The method of claim 567, wherein the array is a four-by-four array.

25

572. The method of claim 567, wherein the array is a five-by-five array.

573. The method of claim 567, wherein the array is a six-by-six array.

30

574. The method of claim 573, wherein the array has dimensions of about six inches by about six inches.

-205-

575. The method of claim 573, wherein the array has dimensions of about one foot by about one foot.

576. The method of claim 563, wherein the optical facility includes a diffuser.

5

577. The method of claim 563, wherein the optical facility is transparent.

578. The method of claim 563, wherein the optical facility includes a hinge for attaching to the circuit board.

10

579. A system for an optical facility for a lighting unit, comprising:
a circuit board;
a plurality of LEDs disposed on the circuit board; and
an attachable optical facility for the circuit board.

15

580. The system of claim 579, wherein the optical facility includes a lens.

581. The system of claim 580, wherein the lens operates on light emitted from the plurality of LEDs.

20

582. The system of claim 581, wherein the optical facility includes a phosphor for shifting at least one wavelength of light emitted from the plurality of LEDs.

583. The system of claim 579, wherein the circuit board is rectangular and the plurality of LEDs are arranged in an array.

25

584. The system of claim 583, wherein the array is a three-by-three array.

585. The system of claim 584, wherein the array has dimensions of about six inches by about six inches.

30

-206-

586. The system of claim 584, wherein the array has dimensions of about one foot by about one foot.

587. The system of claim 583, wherein the array is a four-by-four array.

5

588. The system of claim 583, wherein the array is a five-by-five array.

589. The system of claim 583, wherein the array is a six-by-six array.

10 590. The system of claim 589, wherein the array has dimensions of about six inches by about six inches.

591. The system of claim 589, wherein the array has dimensions of about one foot by about one foot.

15

592. The system of claim 579, wherein the attachable optical facility includes a diffuser.

593. The system of claim 579, wherein the attachable optical facility is transparent.

20

594. The system of claim 579, wherein the attachable optical facility includes a hinge for attaching to the circuit board.

25 595. A method of providing a circuit board for a lighting system, comprising:
providing a circuit board;
disposing a plurality of LEDs on the circuit board;
configuring the circuit board to be disposed in proximity to other similarly
configured circuit boards; and

30 providing a magnetic connector for connecting the circuit board to an item.

-207-

596. The method of claim 595, wherein the item is a second circuit board.

597. The method of claim 596, wherein the circuit board and the second circuit board are magnetically connected and reside in substantially the same plane.

5

598. The method of claim 596, wherein the circuit board and the second circuit board are magnetically connected and can bend relative to each other in different planes while remaining in physical connection.

10 599. The method of claim 595, further comprising providing a data interface for allowing the circuit board to connect in a communicating relationship to another circuit board.

15 600. The method of claim 599, wherein the data interface includes the magnetic connector.

601. The method of claim 600, wherein the data interface transceives data.

20 602. The method of claim 600, wherein the data interface carries power.

603. The method of claim 599, wherein the data interface includes a ball and socket combination.

25 604. The method of claim 599, wherein the data interface includes an adhesive.

605. The method of claim 599, wherein the data interface includes a tape.

30 606. The method of claim 599, wherein the data interface includes one or more interlocking shapes.

607. The method of claim 599, wherein the data interface includes a tab.

-208-

608. The method of claim 599, wherein the data interface includes a solderable finger joint.

5 609. The method of claim 599, wherein an electrical path provides identification to the circuit board.

610. The method of claim 609, wherein the identification is transmitted to a controller on the circuit board.

10

611. The method of claim 610, wherein the identification is transmitted through input and output pins of the circuit board.

612. A circuit board for a lighting system, comprising:

15

a circuit board, the circuit board adapted to be disposed in proximity to other similarly configured circuit boards and to form a communicating relationship therewith; a plurality of LEDs disposed on the circuit board; and a magnetic connector for connecting the circuit board to an item.

20

613. The circuit board of claim 612, wherein the item is a second circuit board.

614. The circuit board of claim 613, wherein the circuit board and the second circuit board are magnetically connected and reside in substantially the same plane.

25

615. The circuit board of claim 613, wherein the circuit board and the second circuit board are magnetically connected and can bend relative to each other in different planes while remaining in physical connection.

30

616. The circuit board of claim 612, further comprising providing a data interface for allowing the circuit board to connect in a communicating relationship to another circuit board.

-209-

617. The circuit board of claim 616, wherein the data interface includes the magnetic connector.

5 618. The circuit board of claim 617, wherein the data interface transceives data.

619. The circuit board of claim 617, wherein the data interface carries power.

10 620. The circuit board of claim 616, wherein the data interface includes a ball and socket combination.

621. The circuit board of claim 616, wherein the data interface includes an adhesive.

15 622. The circuit board of claim 616, wherein the data interface includes a tape.

623. The circuit board of claim 616, wherein the data interface includes one or more interlocking shapes.

20 624. The circuit board of claim 616, wherein the data interface includes a tab.

625. The circuit board of claim 616, wherein the data interface includes a solderable finger joint.

25 626. The circuit board of claim 617, wherein an electrical path provides identification to the circuit board.

627. The circuit board of claim 626, wherein the identification is transmitted to a controller on the circuit board.

30 628. The circuit board of claim 626, wherein the identification is transmitted through input and output pins of the circuit board.

-210-

629. A method of providing a lighting unit, comprising:
providing a structure that is shaped to fit into a fluorescent lighting fixture; and
disposing a plurality of LEDs on the structure, the LEDs configured to receive
5 power from a power facility.

630. A method according to claim 629, further comprising providing a fastening
facility for connecting the structure to the fluorescent lighting fixture.

10 631. A method according to claim 630, wherein the fastening facility includes a screw
hole.

632. A method according to claim 630, wherein the fastening facility includes a clip.

15 633. A method according to claim 629, further comprising providing a thermal
connection between the structure and the fluorescent lighting fixture.

634. A method according to claim 629, further comprising providing a data facility for
delivering data to the plurality of LEDs.

20

635. A method according to claim 629, further comprising associating a control
facility with each one of the plurality of LEDs.

25 636. A method according to claim 635, wherein the plurality of LEDs are configured
to produce substantially white light.

637. A method according to claim 635, wherein the plurality of LEDs include at least
one red LED, at least one green LED, at least one blue LED, and at least one white LED.

30 638. A method according to claim 635, wherein the plurality of LEDs include at least
two white LEDs that emit light at different color temperatures of white light.

-211-

639. A method according to claim 635, wherein the plurality of LEDs include at least one blue LED, the at least one blue LED including a phosphor.

5 640. A method according to claim 635, wherein the plurality of LEDs include at least one white LED and at least one amber LED.

641. A method according to claim 635, wherein the plurality of LEDs include at least one ultraviolet LED and a phosphor.

10

642. A method according to claim 629, wherein the structure is configured to fit over a fluorescent lamp.

643. A method according to claim 629, wherein the structure is a bridge-type structure
15 with a substantially rectangular plane supported by two substantially rectangular legs.

644. A method according to claim 643, wherein the structure includes two substantially rectangular planes connected at about a ninety-degree angle.

20 645. A method according to claim 644, wherein the structure is configured to fit one or more fluorescent lamp ballasts.

646. A method according to claim 643, wherein the structure has three substantially rectangular sides, two of which are substantially parallel to each other, the third of which
25 is perpendicular to the first two and connects the first two.

647. A method according to claim 629, further comprising providing a power facility for powering the plurality of LEDs.

30 648. A method according to claim 647, wherein the power facility is configured to receive power from one or more fluorescent lamp ballasts.

-212-

649. A method according to claim 647, wherein the power facility includes a high-voltage power facility.

5 650. A method according to claim 647, wherein the power facility includes a power-factor-corrected power facility.

651. A method according to claim 647, wherein the power facility includes an on-board power facility.

10

652. A method according to claim 647, wherein the power facility includes an inductively controlled power facility.

15

653. A method according to claim 647, wherein the power facility includes a feed-forward power facility.

654. A method according to claim 647, wherein the power facility includes a power/data power facility.

20

655. A method according to claim 629, wherein the lighting unit is a networked lighting unit.

656. A method according to claim 629, further comprising providing a thermal facility.

25

657. A method according to claim 656, wherein the thermal facility includes an interior cavity of the lighting unit for moving air within the structure.

30

658. A method according to claim 656, wherein the thermal facility includes a vent for releasing air from an interior space of the structure to an exterior space of the structure.

-213-

659. A method according to claim 656, wherein the thermal facility includes at least one fin for radiating heat from the plurality of LEDs.

5 660. A method according to claim 656, wherein the thermal facility includes a heat-conducting mass integral to the structure.

661. A method according to claim 656, wherein the thermal facility includes a potting facility for receiving heat from at least one circuit board associated with the plurality of LEDs.

10

662. A method according to claim 656, wherein the thermal facility includes a metal plate.

663. A lighting unit, comprising:
15 a structure shaped to fit into a fluorescent lighting fixture; and
a plurality of LEDs disposed on the structure, the LEDs configured to receive power from a power facility.

664. A lighting unit according to claim 663, further comprising a fastening facility for
20 connecting the structure to the fluorescent lighting fixture.

665. A lighting unit according to claim 664, wherein the fastening facility includes a screw hole.

25 666. A lighting unit according to claim 664, wherein the fastening facility includes a clip.

667. A lighting unit according to claim 663, further comprising a thermal connection between the structure and the fluorescent lighting fixture.

30

-214-

668. A lighting unit according to claim 663, further comprising a data facility for delivering data to the plurality of LEDs.

5 669. A lighting unit according to claim 663, further comprising a control facility associated with the plurality of LEDs.

670. A lighting unit according to claim 669, wherein the plurality of LEDs are configured to produce substantially white light.

10 671. A lighting unit according to claim 669, wherein the plurality of LEDs include at least one red LED, at least one green LED, at least one blue LED, and at least one white LED.

15 672. A lighting unit according to claim 669, wherein the plurality of LEDs include at least two white LEDs that emit light at different color temperatures of white light.

673. A lighting unit according to claim 669, wherein the plurality of LEDs include at least one blue LED, the at least one blue LED including a phosphor.

20 674. A lighting unit according to claim 669, wherein the plurality of LEDs include at least one white LED and at least one amber LED.

25 675. A lighting unit according to claim 669, wherein the plurality of LEDs include at least one ultraviolet LED and a phosphor.

676. A lighting unit according to claim 663, wherein the structure is configured to fit over a fluorescent lamp.

30 677. A lighting unit according to claim 663, wherein the structure is a bridge-type structure with a substantially rectangular plane supported by two substantially rectangular legs.

-215-

678. A lighting unit according to claim 677, wherein the structure includes two substantially rectangular planes connected at about a ninety-degree angle.

5 678. A lighting unit according to claim 678, wherein the structure is configured to fit one or more fluorescent lamp ballasts.

679. A lighting unit according to claim 677, wherein the structure has three substantially rectangular sides, two of which are substantially parallel to each other, the
10 third of which is perpendicular to the first two and connects the first two.

680. A lighting unit according to claim 663, further comprising a power facility for powering the plurality of LEDs.

15 681. A lighting unit according to claim 680, wherein the power facility is configured to receive power from one or more fluorescent lamp ballasts.

682. A lighting unit according to claim 680, wherein the power facility includes a high-voltage power facility.
20

683. A lighting unit according to claim 680, wherein the power facility includes a power-factor-corrected power facility.

684. A lighting unit according to claim 680, wherein the power facility includes an on-
25 board power facility.

685. A lighting unit according to claim 680, wherein the power facility includes an inductively controlled power facility.

30 686. A lighting unit according to claim 680, wherein the power facility includes a feed-forward power facility.

-216-

687. A lighting unit according to claim 680, wherein the power facility includes a power/data power facility.

5 688. A lighting unit according to claim 663, wherein the lighting unit is a networked lighting unit.

689. A lighting unit according to claim 663, further comprising a thermal facility.

10 690. A lighting unit according to claim 689, wherein the thermal facility includes an interior cavity of the lighting unit for moving air within the structure.

691. A lighting unit according to claim 689, wherein the thermal facility includes a vent for releasing air from an interior space of the structure to an exterior space of the
15 structure.

692. A lighting unit according to claim 689, wherein the thermal facility includes at least one fin for radiating heat from the plurality of LEDs.

20 693. A lighting unit according to claim 689, wherein the thermal facility includes a heat-conducting mass integral to the structure.

694. A lighting unit according to claim 689, wherein the thermal facility includes a potting facility for receiving heat from at least one circuit board associated with the
25 plurality of LEDs.

695. A lighting unit according to claim 689, wherein the thermal facility includes a metal plate.697. A method of providing a lighting unit, comprising:

providing a structure that is shaped to fit into an incandescent lighting fixture;

30 and

-217-

disposing a plurality of LEDs on the structure, the LEDs configured to receive power from a power facility.

5 698. A method according to claim 697, further comprising providing a fastening facility for connecting the structure to the incandescent lighting fixture.

699. A method according to claim 698, wherein the fastening facility includes a screw hole.

10 700. A method according to claim 698, wherein the fastening facility includes a clip.

701. A method according to claim 697, further comprising providing a thermal connection between the structure and the incandescent lighting fixture.

15 702. A method according to claim 697, further comprising providing a data facility for delivering data to the plurality of LEDs.

703. A method according to claim 697, further comprising associating a control facility with each one of the plurality of LEDs.

20

704. A method according to claim 697, wherein the plurality of LEDs are configured to produce substantially white light.

25 705. A method according to claim 704 wherein the plurality of LEDs include at least one red LED, at least one green LED, and least one blue LED, and at least one white LED.

706. A method according to claim 697, wherein the plurality of LEDs include at least two white LEDs that emit light at different color temperatures of white light.

30

-218-

707. A method according to claim 697, wherein the plurality of LEDs include at least one blue LED that further includes a phosphor.

708. A method according to claim 697, wherein the plurality of LEDs include at least one white LED and at least one amber LED.

709. A method according to claim 697, wherein the plurality of LEDs include at least one ultraviolet LED, the ultraviolet LED including a phosphor.

710. A method according to claim 697, wherein the structure is configured to fit over an incandescent light bulb.

711. A method according to claim 710, wherein the structure is a bridge-type structure with a substantially rectangular plane supported by two substantially rectangular legs.

712. A method according to claim 710, wherein the structure includes two substantially rectangular planes connected at about a ninety degree angle.

713. A method according to claim 710, wherein the structure is a substantially cylindrical structure with a substantially circular top.

714. A method according to claim 710, wherein the structure has three substantially rectangular sides, two of which are substantially parallel to each other, the third of which is perpendicular to the first two and connects the first two.

715. A method according to claim 697, wherein the power facility is a high-voltage power facility.

716. A method according to claim 697, wherein the power facility includes a power-factor-corrected power facility.

-219-

717. A method according to claim 697, wherein the power facility includes an on-board power facility.

5 718. A method according to claim 697, wherein the power facility includes an inductively controlled power facility.

719. A method according to claim 697, wherein the power facility includes a feed-forward power facility.

10 720. A method according to claim 697, wherein the power facility includes a power/data power facility.

721. A method according to claim 697, wherein the lighting unit is a networked lighting unit.

15 722. A method according to claim 697, further comprising providing a thermal facility for the lighting unit.

20 723. A method according to claim 722, wherein the thermal facility includes a heat-conducting path for connecting the structure that supports the plurality of LEDs to the housing of the incandescent lighting fixture.

724. A method according to claim 723, wherein the heat-conducting path connects to a socket for an incandescent bulb.

25 725. A method according to claim 723, wherein the heat-conducting path includes a flare shape that touches a housing of an incandescent lighting unit.

30 726. A method according to claim 723, wherein the thermal facility includes an interior cavity of the structure for moving air within the structure.

-220-

727. A method according to claim 723, wherein the thermal facility includes a vent for releasing air from an interior of the structure to an exterior of the structure.

728. A method according to claim 723, wherein the thermal facility includes at least
5 one fin for radiating heat from the structure.

729. A method according to claim 723, wherein the thermal facility includes a heat-conducting mass integral to the structure.

10 730. A method according to claim 723, wherein the thermal facility includes a potting facility for receiving heat from a circuit board associated with one or more of the plurality of LEDs.

15 731. A method according to claim 723, wherein the thermal facility includes a metal plate.

732. A lighting unit, comprising:
a structure shaped to fit to an incandescent lighting fixture; and
a plurality of LEDs on the structure, the LEDs being adapted to receive power
20 from a power facility.

733. A lighting unit according to claim 732, further comprising a fastening facility for connecting the structure to the incandescent lighting fixture.

25 734. A lighting unit according to claim 733, wherein the fastening facility includes a screw hole.

735. A lighting unit according to claim 733, wherein the fastening facility includes a clip.
30

-221-

736. A lighting unit according to claim 732, further comprising a thermal connection between the structure and the incandescent lighting fixture.

737. A lighting unit according to claim 732, further comprising providing a data
5 facility for delivering data to the plurality of LEDs.

738. A lighting unit according to claim 732, further comprising a control facility associated with each one of the plurality of LEDs.

10 739. A lighting unit according to claim 732, wherein the plurality of LEDs are configured to produce substantially white light.

740. A lighting unit according to claim 739 wherein the plurality of LEDs include at least one red LED, at least one green LED, and least one blue LED, and at least one
15 white LED.

741. A lighting unit according to claim 732, wherein the plurality of LEDs include at least two white LEDs that emit light at different color temperatures of white light.

20 742. A lighting unit according to claim 732, wherein the plurality of LEDs include at least one blue LED that further includes a phosphor.

743. A lighting unit according to claim 732, wherein the plurality of LEDs include at least one white LED and at least one amber LED.

25 744. A lighting unit according to claim 732, wherein the plurality of LEDs include at least one ultraviolet LED, the ultraviolet LED including a phosphor.

745. A lighting unit according to claim 732, wherein the structure is configured to fit
30 over an incandescent light bulb.

-222-

746. A lighting unit according to claim 745, wherein the structure is a bridge-type structure with a substantially rectangular plane supported by two substantially rectangular legs.

5 747. A lighting unit according to claim 745, wherein the structure includes two substantially rectangular planes connected at about a ninety degree angle.

748. A lighting unit according to claim 745, wherein the structure is a substantially cylindrical structure with a substantially circular top.

10

749. A lighting unit according to claim 745, wherein the structure has three substantially rectangular sides, two of which are substantially parallel to each other, the third of which is perpendicular to the first two and connects the first two.

15 750. A lighting unit according to claim 732, wherein the power facility is a high-voltage power facility.

751. A lighting unit according to claim 732, wherein the power facility includes a power-factor-corrected power facility.

20

752. A lighting unit according to claim 732, wherein the power facility includes an on-board power facility.

25 753. A lighting unit according to claim 732, wherein the power facility includes an inductively controlled power facility.

754. A lighting unit according to claim 732, wherein the power facility includes a feed-forward power facility.

30 755. A lighting unit according to claim 732, wherein the power facility includes a power/data power facility.

-223-

756. A lighting unit according to claim 732, wherein the lighting unit is a networked lighting unit.

5 757. A lighting unit according to claim 732, further comprising a thermal facility for the lighting unit.

758. A lighting unit according to claim 757, wherein the thermal facility includes a heat-conducting path for connecting the structure that supports the plurality of LEDs to
10 the housing of the incandescent lighting fixture.

759. A lighting unit according to claim 758, wherein the heat-conducting path connects to a socket for an incandescent bulb.

15 760. A lighting unit according to claim 758, wherein the heat-conducting path includes a flare shape that touches a housing of an incandescent lighting unit.

761. A lighting unit according to claim 757, wherein the thermal facility includes an interior cavity of the structure for moving air within the structure.
20

762. A lighting unit according to claim 757, wherein the thermal facility includes a vent for releasing air from an interior of the structure to an exterior of the structure.

763. A lighting unit according to claim 757, wherein the thermal facility includes at
25 least one fin for radiating heat from the structure.

764. A lighting unit according to claim 757, wherein the thermal facility includes a heat-conducting mass integral to the structure.

-224-

765. A lighting unit according to claim 757, wherein the thermal facility includes a potting facility for receiving heat from a circuit board associated with one or more of the plurality of LEDs.

5 766. A lighting unit according to claim 757, wherein the thermal facility includes a metal plate.

767. A device comprising:

10 a housing configured to fit a lighting fixture, the lighting fixture being a conventional lighting fixture, and the housing shaped to cover a space where a conventional bulb would be located in the lighting fixture;
a plurality of light sources associated with the housing, the plurality of light sources generating heat in response to activation;
a thermal facility that dissipates heat from the plurality of light sources; and
15 a fastener adapted to attach the housing to the lighting fixture.

768. The device of claim 767 wherein the fastener includes at least one of a screw hole, a clip, or a tab.

20 769. The device of claim 767 wherein the fastener provides a heat conduction path for the thermal facility.

770. The device of claim 767 further comprising a circuit board associated with one or more of the plurality of light sources.

25

771. The device of claim 767 wherein the thermal facility includes a heat-conducting plate associated with the circuit board.

772. The device of claim 767 wherein the housing is cylindrical.

30

-225-

773. The device of claim 767 further comprising a processor to control operation of the plurality of light sources.

774. The device of claim 767 wherein the plurality of light sources includes at least one LED.

775. The device of claim 767 wherein the plurality of light sources are disposed on top of the housing.

776. The device of claim 767 wherein the light fixture includes at least one ballast.

777. The device of claim 767 wherein the light fixture includes a diffuser that diffuses light emitted from the plurality of light sources.

778. The device of claim 767 wherein the light sources are arranged in one or more lines.

779. The device of claim 767 wherein the fixture includes a socket for at least one of an incandescent lamp or a halogen lamp.

780. The device of claim 767 further comprising an optical facility.

781. The device of claim 779 wherein the optical facility includes a protective cover for at least one of the plurality of light sources and one or more electrical components associated with the plurality of light sources.

782. A method comprising:

providing a housing configured to fit a lighting fixture, the lighting fixture being a conventional lighting fixture, and the housing shaped to cover a space where a conventional bulb would be located in the lighting fixture;

-226-

associating a plurality of light sources with the housing, the plurality of light sources generating heat in response to activation;

placing a thermal facility in thermally conductive association with the plurality of light sources to dissipate heat from the plurality of light sources when the plurality of

5 light sources are activated; and

providing a fastener adapted to attach the housing to the lighting fixture.

783. The method of claim 782 wherein the fastener includes at least one of a screw hole, a clip, or a tab.

10

784. The method of claim 782 wherein the fastener provides a heat conduction path for the thermal facility.

785. The method of claim 782 further comprising mounting the plurality of light sources on a circuit board.

15

786. The method of claim 782 wherein the thermal facility includes a heat-conducting plate associated with the circuit board.

20

787. The method of claim 782 wherein the housing is cylindrical.

788. The method of claim 782 further comprising controlling operation of the plurality of light sources with a processor.

25

789. The method of claim 782 wherein the plurality of light sources includes at least one LED.

790. The method of claim 782 wherein the plurality of light sources are disposed on top of the housing.

30

791. The method of claim 782 wherein the light fixture includes at least one ballast.

-227-

792. The method of claim 782 further comprising diffusing light emitted from the plurality of light sources.

5 793. The method of claim 782 further comprising arranging the light sources in one or more lines.

794. The method of claim 782 wherein the fixture includes a socket for at least one of an incandescent lamp or a halogen lamp.

10

795. The method of claim 782 further comprising associating an optical facility with the light sources.

15

796. The method of claim 795 wherein the optical facility includes a protective cover for at least one of the plurality of light sources and one or more electrical components associated with the plurality of light sources.

20

797. A method of providing a lighting structure, comprising:
providing a structural element for bearing a plurality of LEDs; and
providing a control facility for controlling the LEDs, wherein the structural element is configured to fit with other structural elements into the lighting structure.

25

798. The method of claim 797, wherein the structural element is designed to allow tessellation of multiple structural elements.

799. The method of claim 797, wherein the structural element is designed to allow tiling of structural elements filling a portion of a two-dimensional plane.

30

800. The method of claim 797, wherein the structural element is a triangle.

801. The method of claim 797, wherein the structural element is an icosahedron.

-228-

802. The method of claim 797, where~~e~~in the structural element is a six-sided element.

803. The method of claim 797, where~~e~~in the structural element is designed to facilitate
5 construction of a spherical lighting structure.

804. The method of claim 797, where~~e~~in the structural element is designed to facilitate
construction of a two-dimensional light~~i~~ng structure.

10 805. The method of claim 797, where~~e~~in the structural element includes a power
facility.

806. The method of claim 805, where~~e~~in the power facility is a high-voltage power
facility.

15 807. The method of claim 805, where~~e~~in the power facility is a power-factor-corrected
power facility.

808. The method of claim 805, where~~e~~in the power facility is an on-board power
20 facility.

809. The method of claim 805, where~~e~~in the power facility is an inductively controlled
power facility.

25 810. The method of claim 805, where~~e~~in the power facility is a feed-forward power
facility.

811. The method of claim 805, where~~e~~in the power facility is a power/data power
facility.

30

-229-

812. The method of claim 797, wherein the structural element is a networked lighting unit.

813. The method of claim 812, wherein the structural element is addressed using a
5 serial addressing protocol.

814. The method of claim 797, wherein the structural element is designed to facilitate construction of a rectangular solid lighting structure.

10 815. A system for a lighting structure, comprising:
a structural element for bearing a plurality of LEDs; and
a control facility for controlling the LEDs, wherein the structural element is configured to fit with other structural elements into the lighting structure.

15 816. The system of claim 815, wherein the structural element is designed to allow tessellation of multiple structural elements.

817. The system of claim 815, wherein the structural element is designed to allow tiling of structural elements filling a portion of a two-dimensional plane.

20

818. The system of claim 815, wherein the structural element is a triangle.

819. The system of claim 815, wherein the structural element is an isocahedron.

25 820. The system of claim 815, wherein the structural element is a six-sided element.

821. The system of claim 815, wherein the structural element is designed to facilitate construction of a spherical lighting structure.

30 822. The system of claim 815, wherein the structural element is designed to facilitate construction of a two-dimensional lighting structure.

-230-

823. The system of claim 815, wherein the structural element includes a power facility.

5 824. The system of claim 823, wherein the power facility is a high-voltage power facility.

825. The system of claim 823, wherein the power facility is a power-factor-corrected power facility.

10

826. The system of claim 823, wherein the power facility is an on-board power facility.

15

827. The system of claim 823, wherein the power facility is an inductively controlled power facility.

828. The system of claim 823, wherein the power facility is a feed-forward power facility.

20

829. The system of claim 823, wherein the power facility is a power/data power facility.

830. The system of claim 815, wherein the structural element is a networked lighting unit.

25

831. The system of claim 830, wherein the structural element is addressed using a serial addressing protocol.

30

832. The system of claim 815, wherein the structural element is designed to facilitate construction of a rectangular solid lighting structure.

-231-

833. A method of providing an effect on a lighting system, comprising:
distributing a plurality of lighting units in a geometric configuration, each of the
lighting units being an addressable lighting unit;

5 mapping a plurality of addresses corresponding to the plurality of lighting units;
providing a control facility for controlling the plurality of lighting units using the
plurality of addresses;

providing an authoring facility for authoring an effect; and
using the authoring facility to generate a scrolling effect on the lighting system,
10 the scrolling effect using the plurality of addresses to map control signals to the locations
of selected ones of the plurality of lighting units in the geometric configuration.

834. The method of claim 833, wherein the scrolling effect is a text effect.

15 835. The method of claim 1, wherein the scrolling effect is an animation effects.

836. The method of claim 1, wherein the lighting units are individually addressable.

837. The method of claim 1, wherein the lighting units are addressable strings of
20 lighting units.

838. The method of claim 837, wherein the strings are flexible.

839. The method of claim 837, wherein the strings are disposed as a curtain.
25

840. The method of claim 837, wherein the strings are woven into a fabric.

841. The method of claim 837, wherein the strings are disposed on an exterior of a
building.
30

-232-

842. The method of claim 837, wherein the strings are disposed on a wall of an interior of a building.

843. The method of claim 837, wherein the lighting units are disposed in a non-
5 rectangular configuration.

844. A system for generating a scrolling effect on a lighting system, comprising:
a plurality of lighting units in a geometric configuration, each one of the plurality
of lighting units having an address and a predetermined location within the geometric
10 configuration;
an address mapping of each address of one of the plurality of lighting units to the
predetermined location of that one of the plurality of lighting units;
a control facility for controlling the lighting units, the control facility configured
to access each one of the plurality of lighting units by address; and
15 an authoring facility for authoring an effect including a scrolling effect by
applying the address mapping to map actions in a user interface to lighting control
signals for selected ones of the plurality of lighting units in the geometric configuration.

845. The system of claim 844, wherein the scrolling effect is a text effect.
20

846. The system of claim 844, wherein the scrolling effect is an animation effects.

847. The system of claim 844, wherein the lighting units are individually addressable.

25 848. The system of claim 844, wherein the lighting units include addressable strings of
lighting units.

849. The system of claim 848, wherein the strings are flexible.

30 850. The system of claim 848, wherein the strings are disposed as a curtain.

-233-

851. The system of claim 848, wherein the strings are woven into a fabric.

852. The system of claim 848, wherein the strings are disposed on an exterior of a building.

5

853. The system of claim 848, wherein the strings are disposed on a wall of an interior of a building.

10

854. The system of claim 844, wherein the lighting units are disposed in a non-rectangular configuration.

15

855. A method of providing a lighting system, comprising:
providing a plurality of LEDs;
providing a control facility for the LEDs; and
disposing the LEDs and the control facility in a housing, the housing configured to hold an on-board power facility.

20

856. The method of claim 855, wherein the power facility includes a high-voltage power facility.

857. The method of claim 855, wherein the power facility includes a power-factor-corrected power facility.

25

858. The method of claim 855, wherein the power facility includes an inductively controlled power facility.

859. The method of claim 855, wherein the power facility includes a feed-forward power facility.

30

860. The method of claim 855, wherein the power facility includes a power/data power facility.

-234-

861. The method of claim 855, wherein the lighting system includes an architectural lighting fixture.

5 862. The method of claim 855, wherein the lighting system includes a theatrical lighting system.

863. The method of claim 855, wherein the lighting system includes a lighting system for a transportation environment.

10

864. The method of claim 855, wherein the lighting system includes a general illumination lighting system for a venue.

865. The method of claim 864, wherein the venue includes an entertainment venue.

15

866. The method of claim 864, wherein the venue includes a restaurant.

867. The method of claim 864, wherein the venue includes a nightclub.

20 868. The method of claim 864, wherein the venue includes an office.

869. The method of claim 855, wherein the lighting system includes an outdoor lighting system for an exterior of a building.

25 870. The method of claim 855, wherein the lighting system includes a lighting system for a large-scale display.

871. The method of claim 855, wherein the lighting system includes an alcove lighting system.

30

-235-

872. The method of claim 855, wherein the lighting system includes a wall washing lighting system.

873. A lighting system, comprising:

- 5 a housing configured to hold an on-board power facility;
 a plurality of LEDs disposed in the housing; and
 a control facility disposed in the housing, the control facility configured to control operation of the plurality of LEDs.

10 874. The system of claim 873, wherein the power facility includes a high-voltage power facility.

875. The system of claim 873, wherein the power facility includes a power-factor-corrected power facility.

15

876. The system of claim 873, wherein the power facility includes an inductively controlled power facility.

20 877. The system of claim 873, wherein the power facility includes a feed-forward power facility.

878. The system of claim 873, wherein the power facility includes a power/data power facility.

25 879. The system of claim 873, wherein the lighting system includes an architectural lighting fixture.

880. The system of claim 873, wherein the lighting system includes a theatrical lighting system.

30

-236-

881. The system of claim 873, wherein the lighting system includes a lighting system for a transportation environment.

5 882. The system of claim 873, wherein the lighting system includes a general illumination lighting system for a venue.

883. The system of claim 882, wherein the venue includes an entertainment venue.

10 884. The system of claim 882, wherein the venue includes a restaurant.

885. The system of claim 882, wherein the venue includes a nightclub.

886. The system of claim 873, wherein the venue includes an office.

15 887. The system of claim 873, wherein the lighting system includes an outdoor lighting system for the exterior of a building.

20 888. The system of claim 873, wherein the lighting system includes a lighting system for a large-scale display.

889. The system of claim 873, wherein the lighting system includes an alcove lighting system.

25 890. The system of claim 873, wherein the lighting system includes a wall washing lighting system.

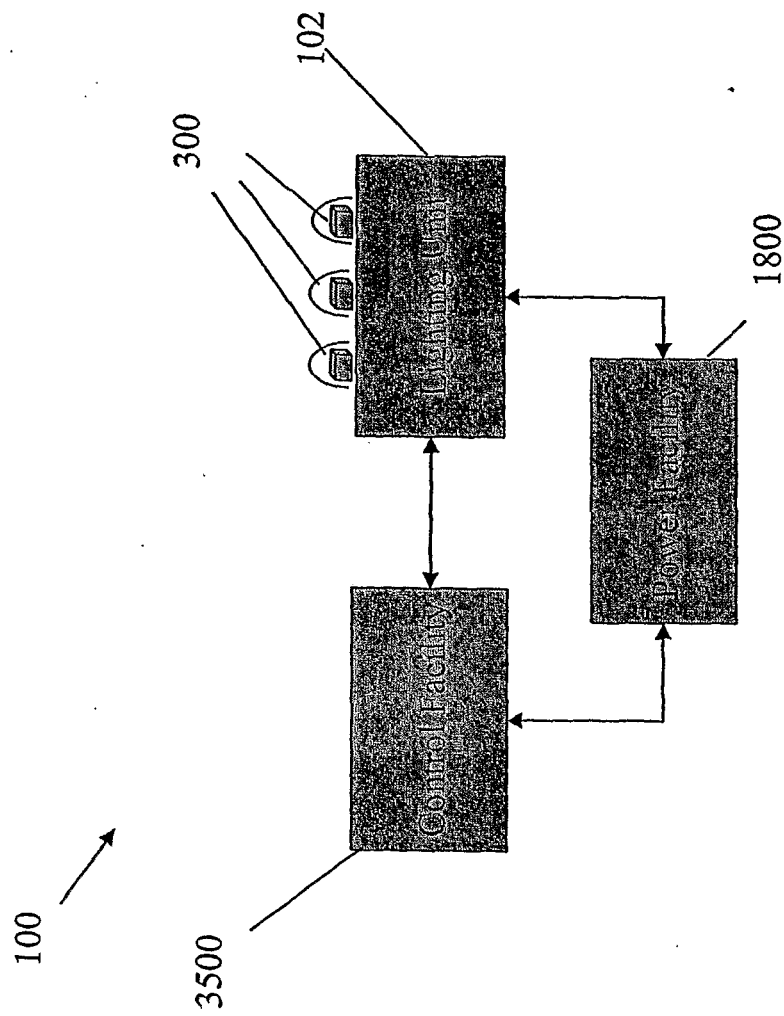


Fig. 1

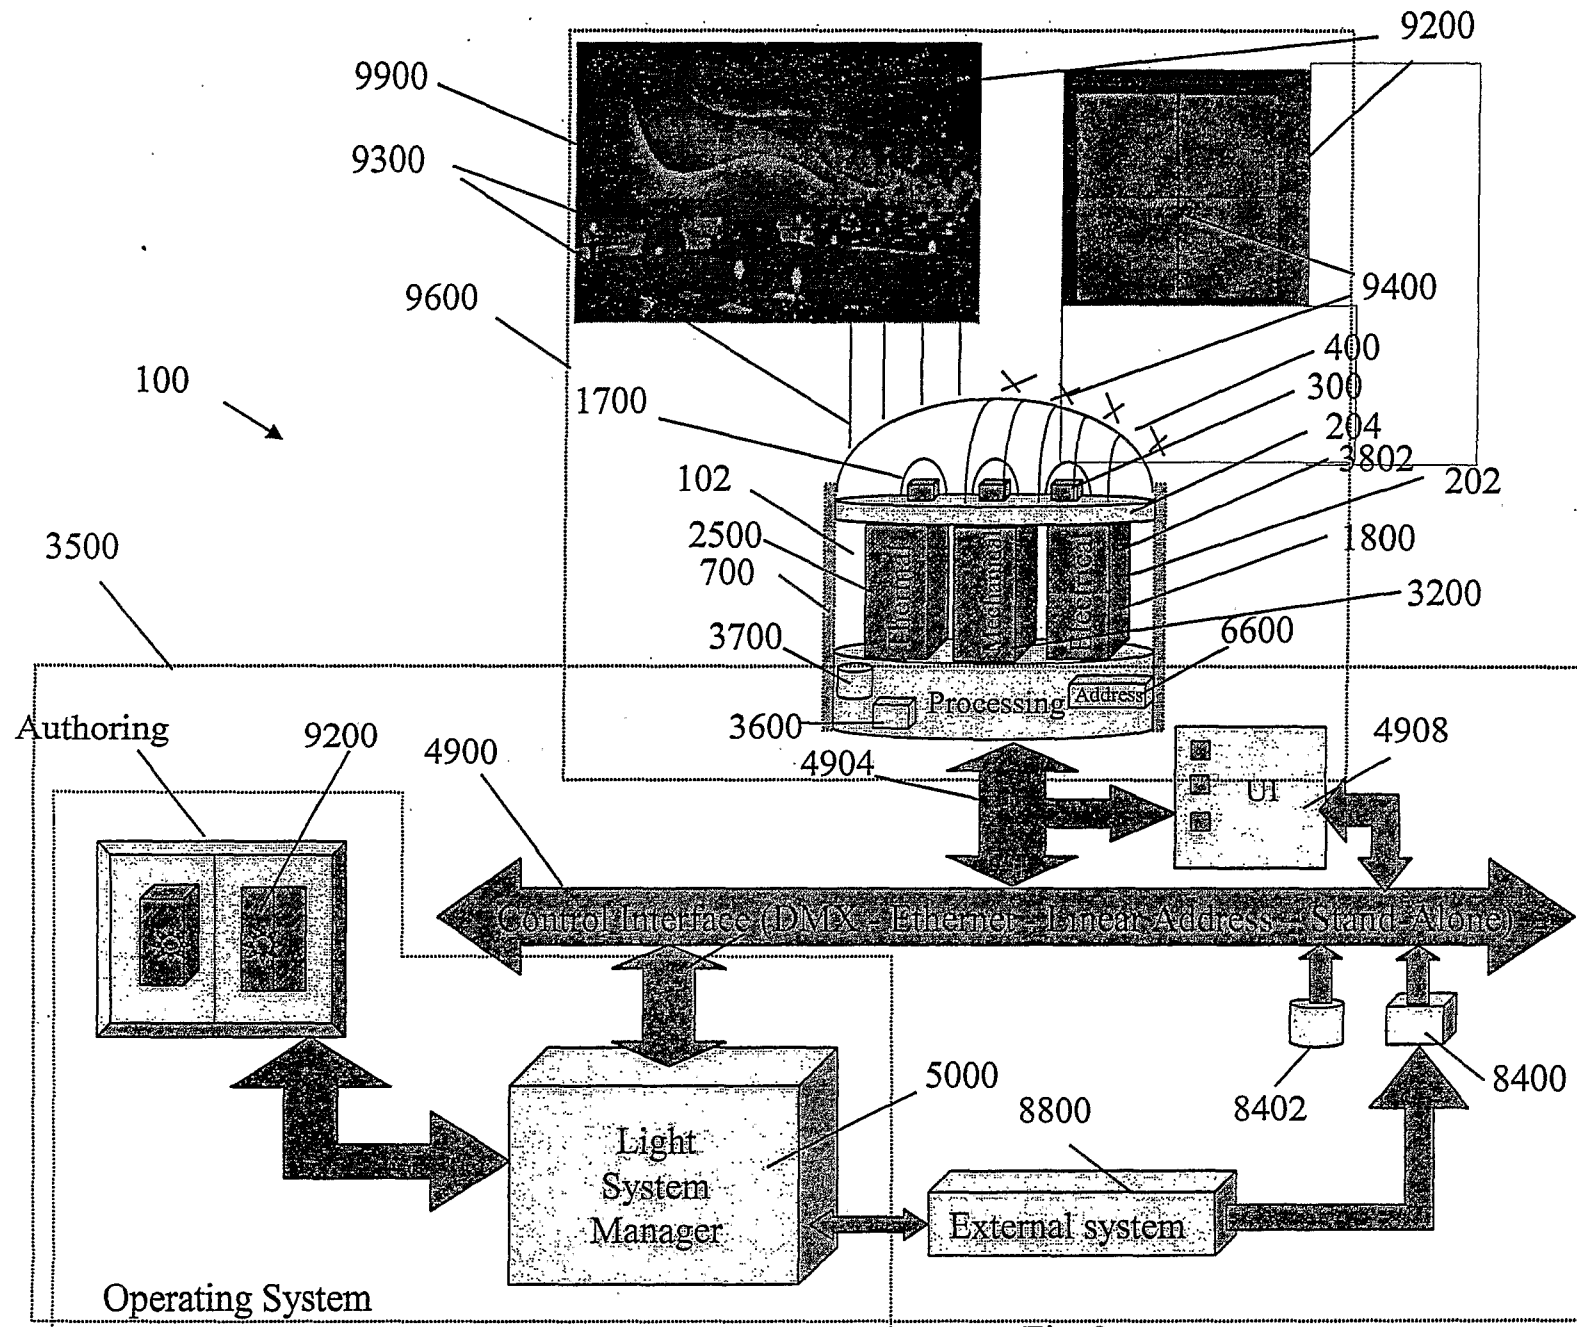


Fig. 2

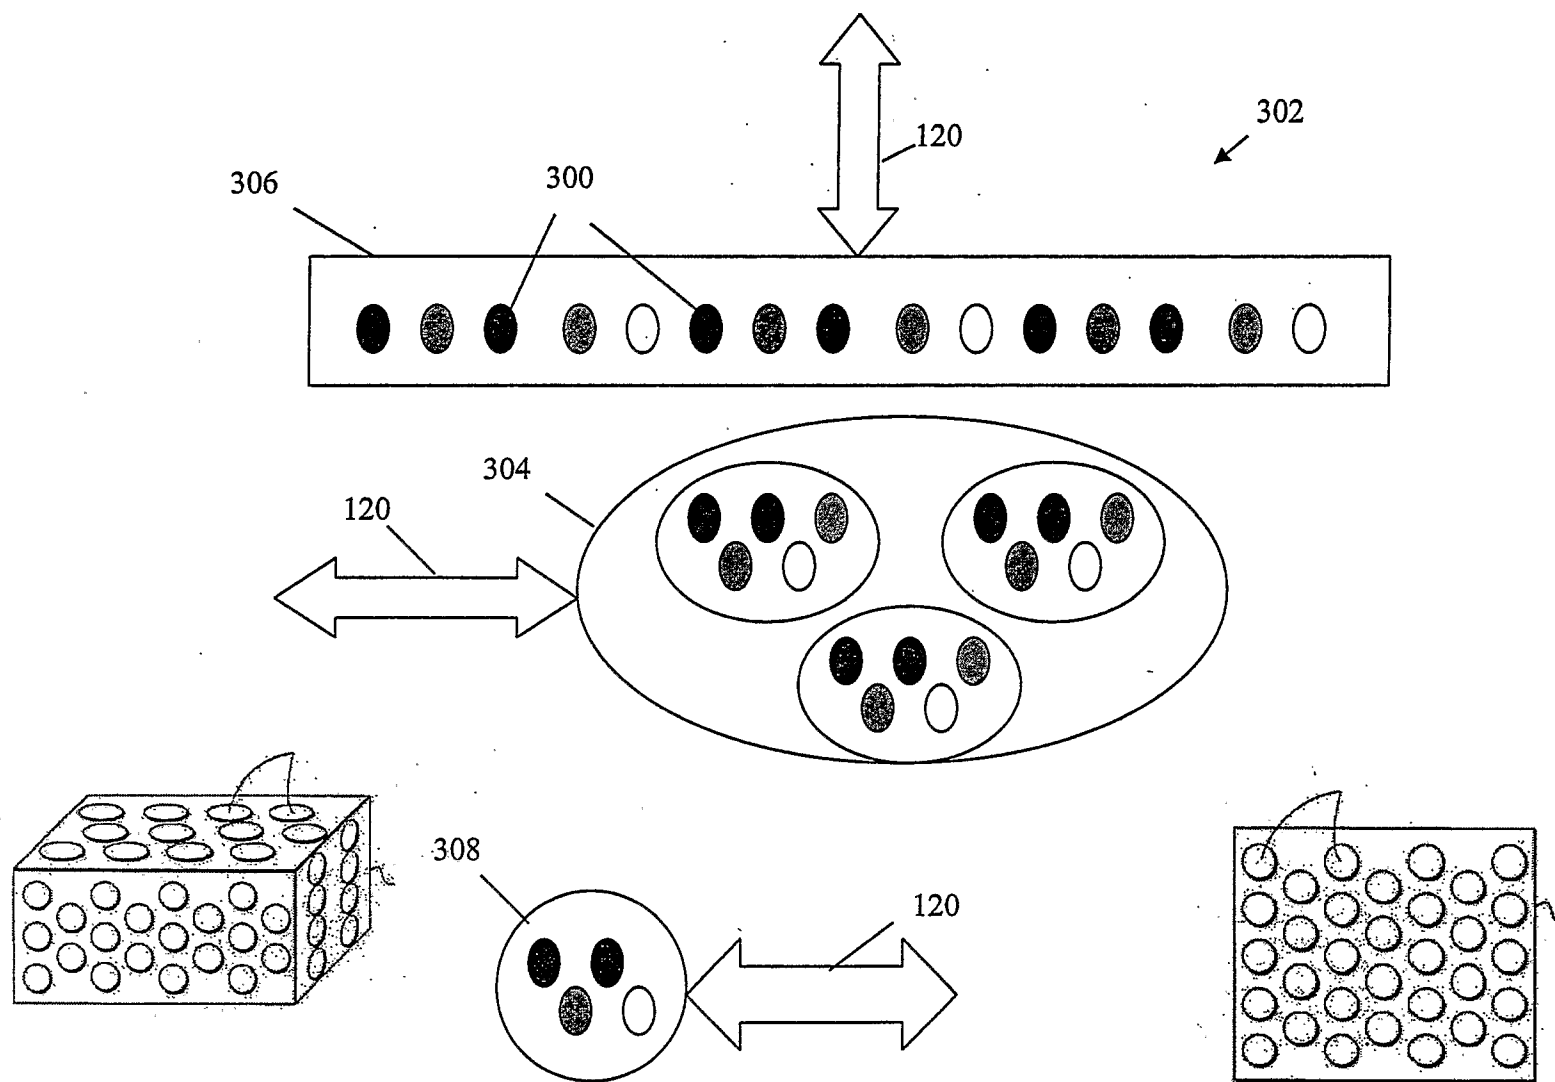


Fig. 3

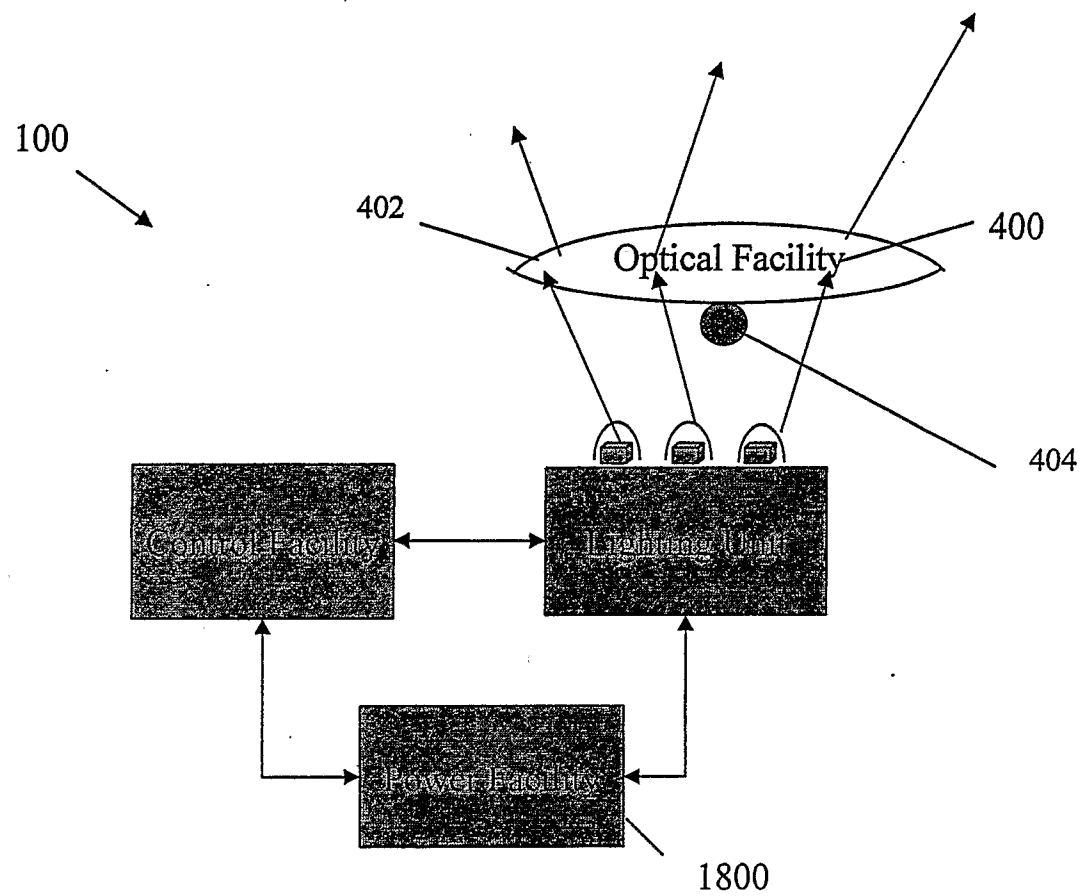


Fig. 4

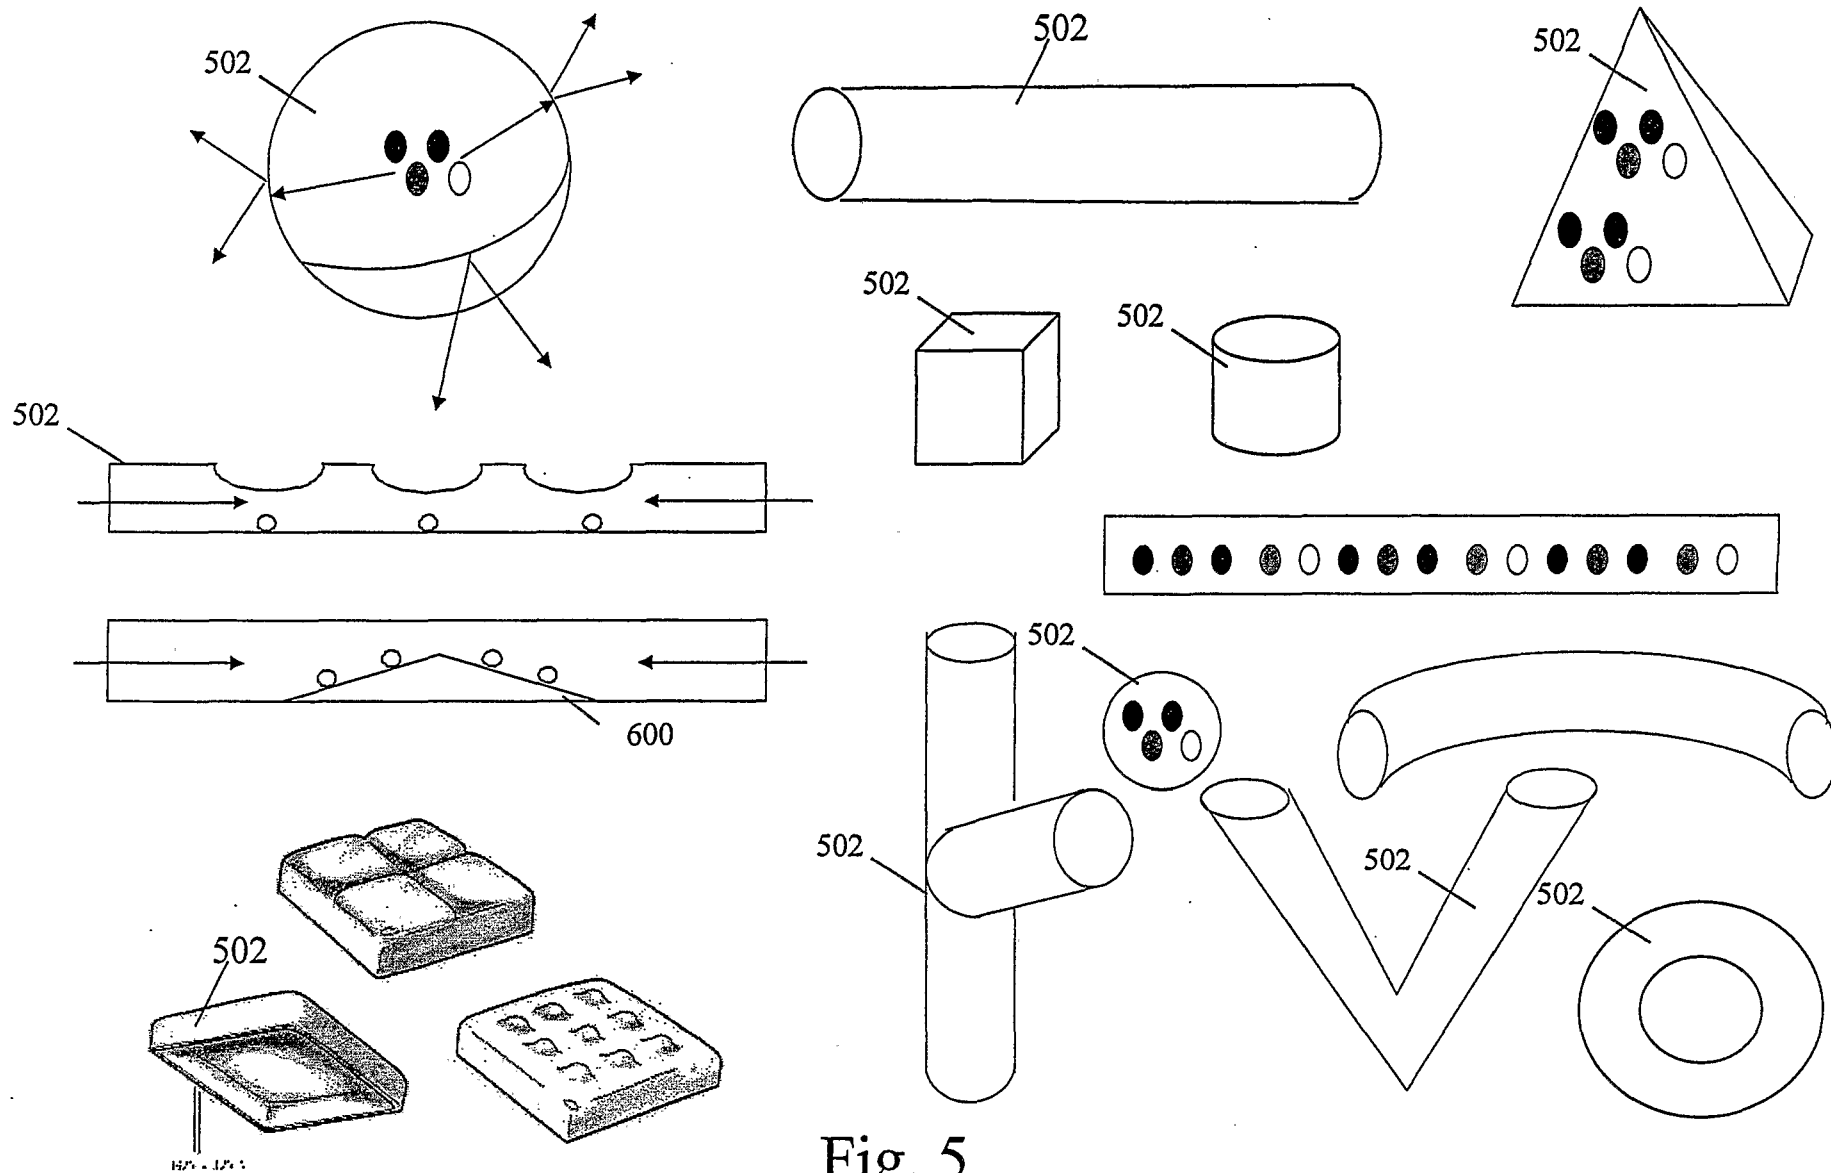
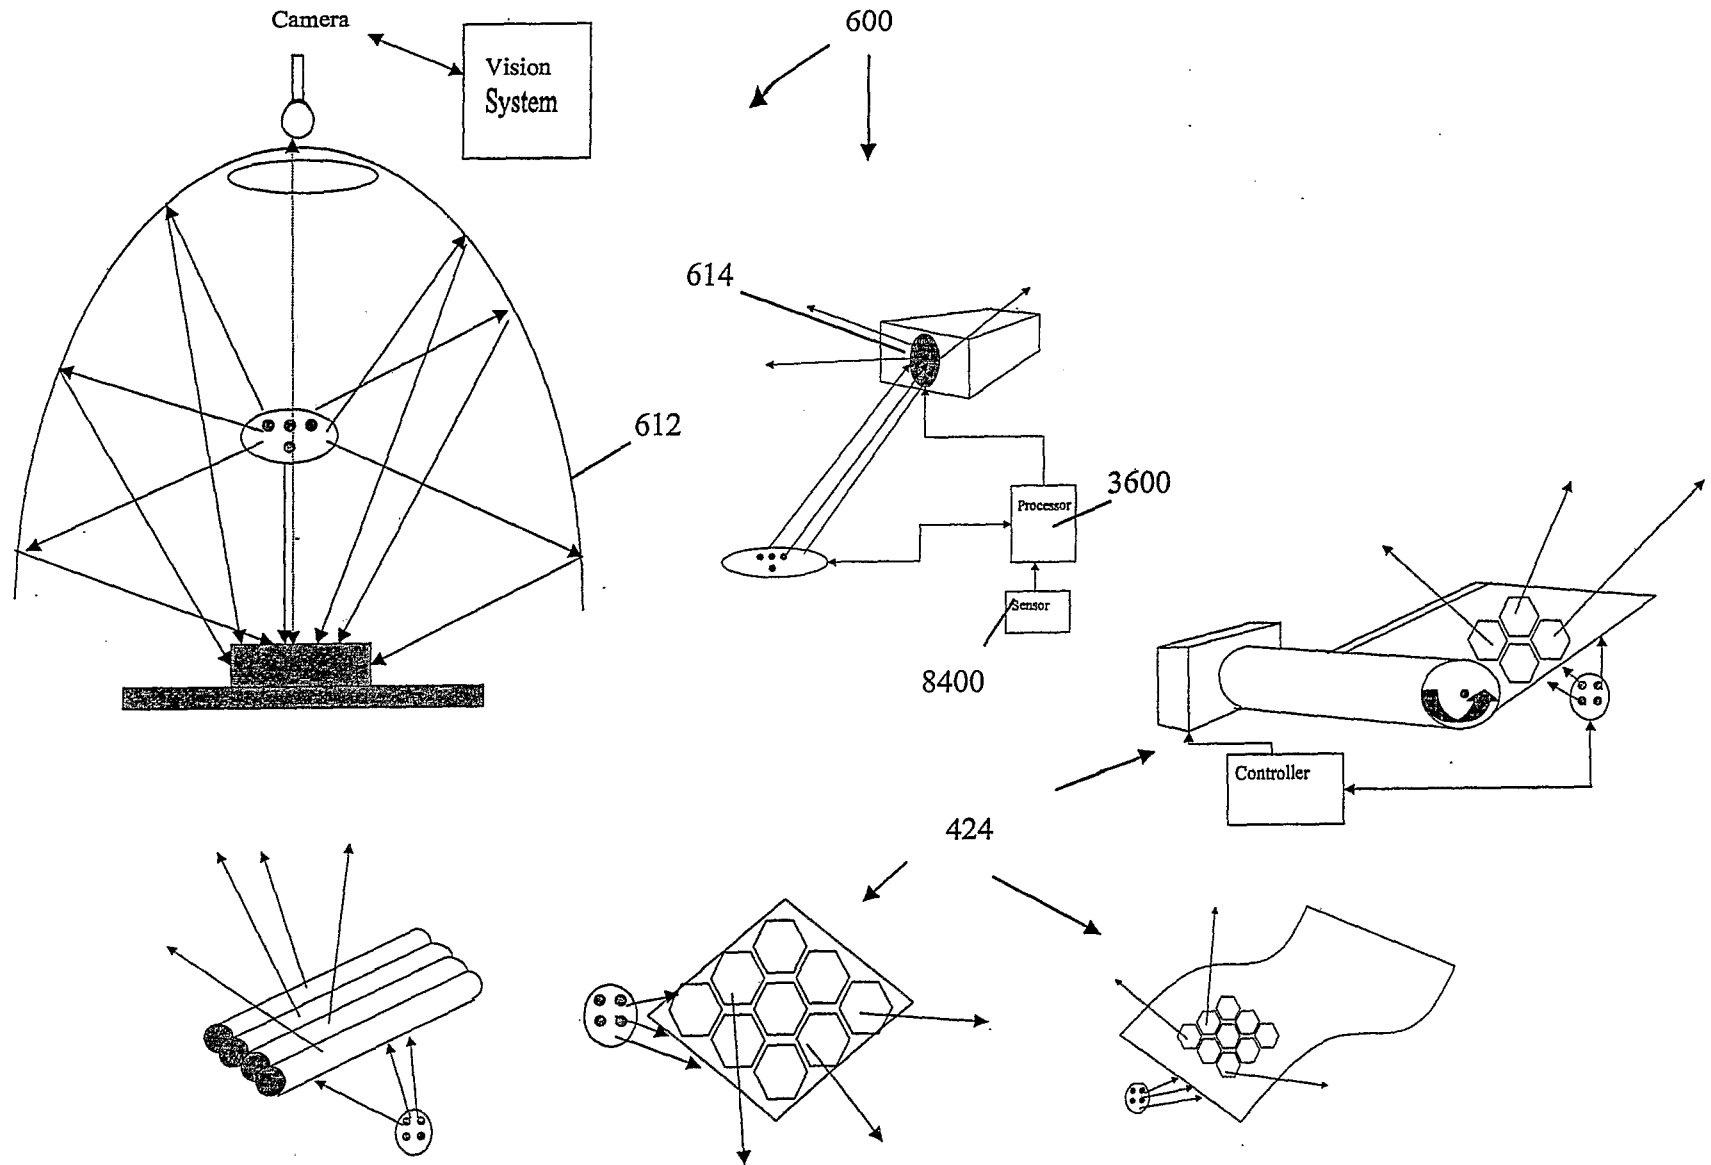


Fig. 5



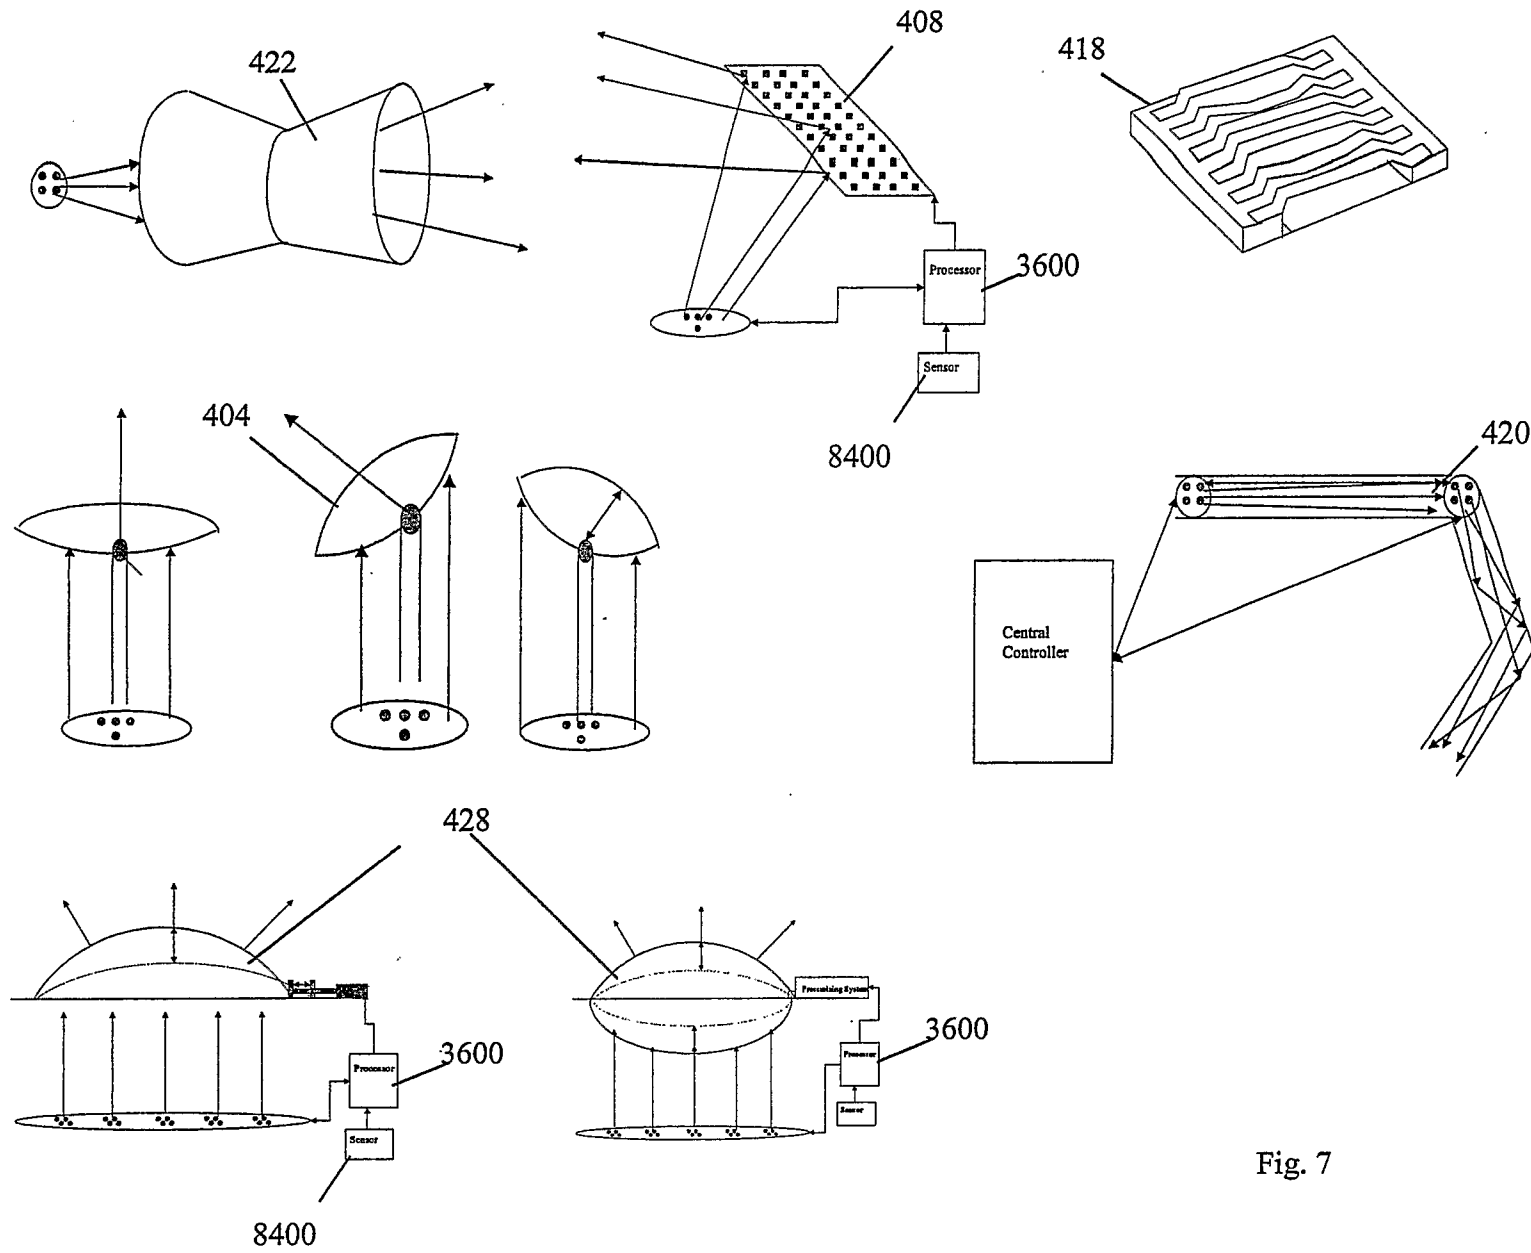


Fig. 7

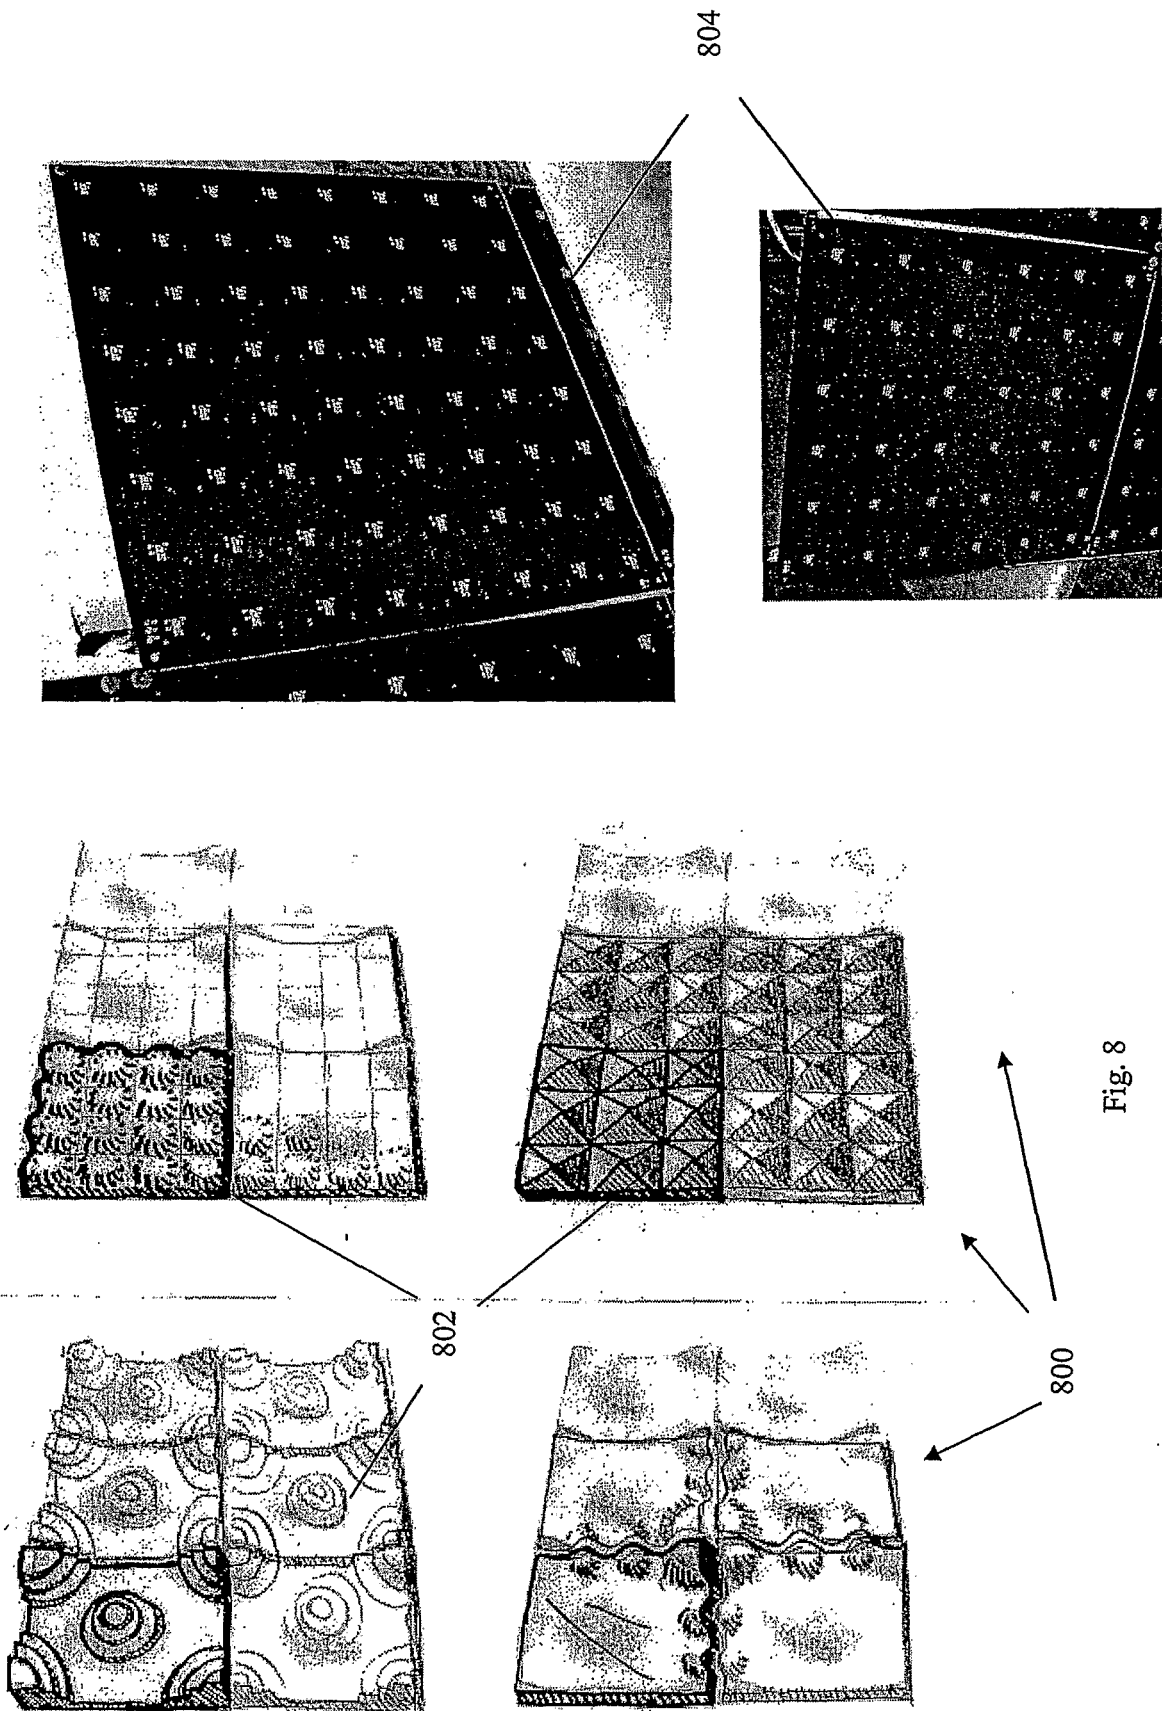


Fig. 8

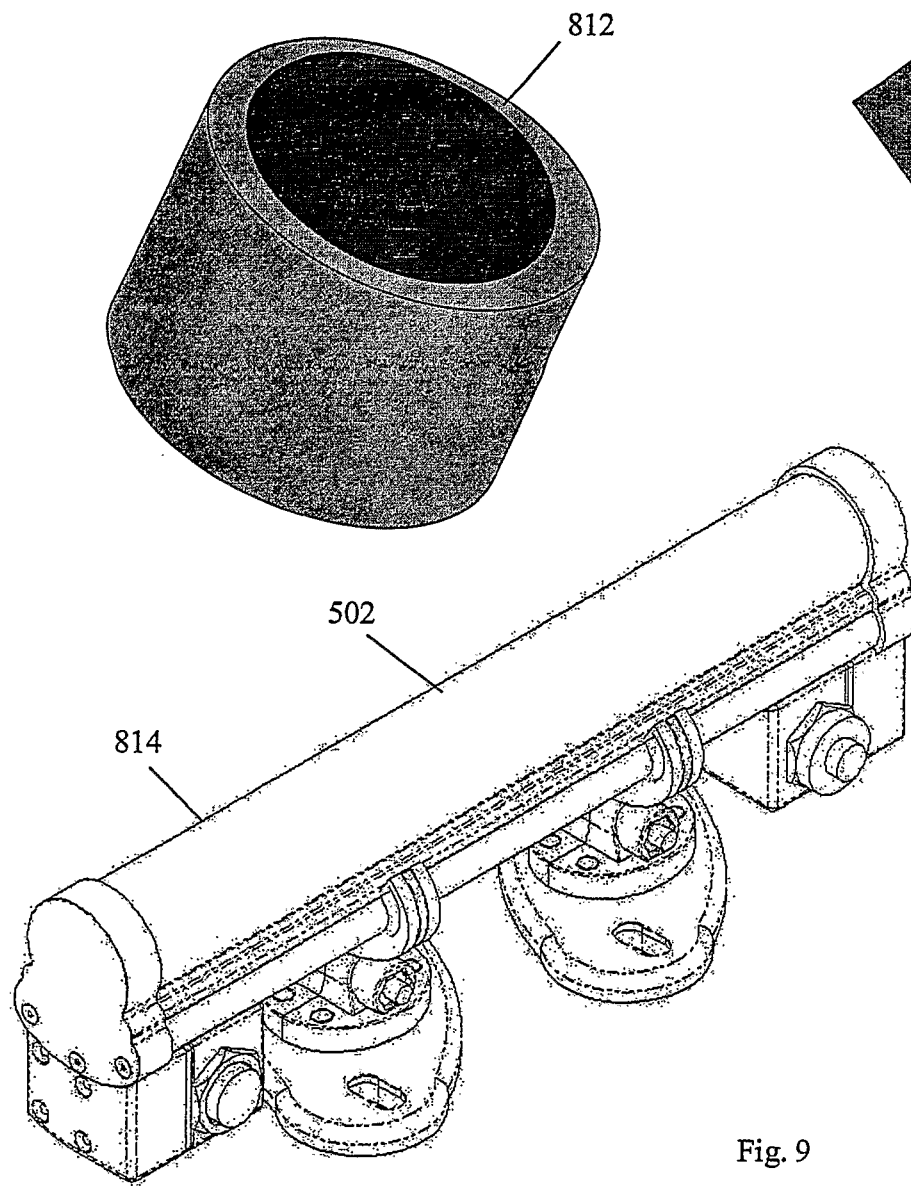
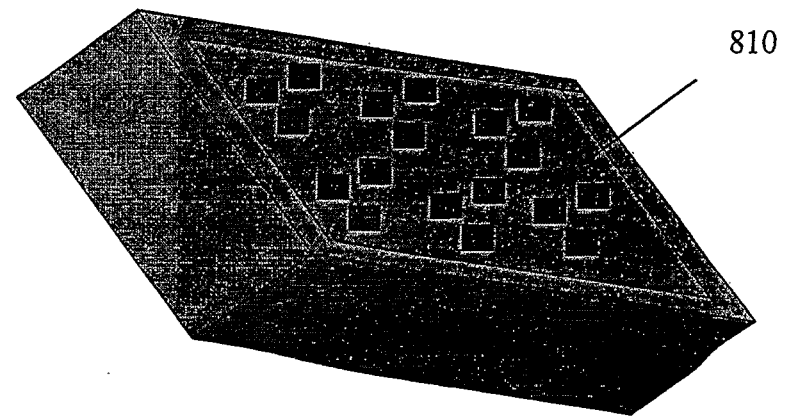
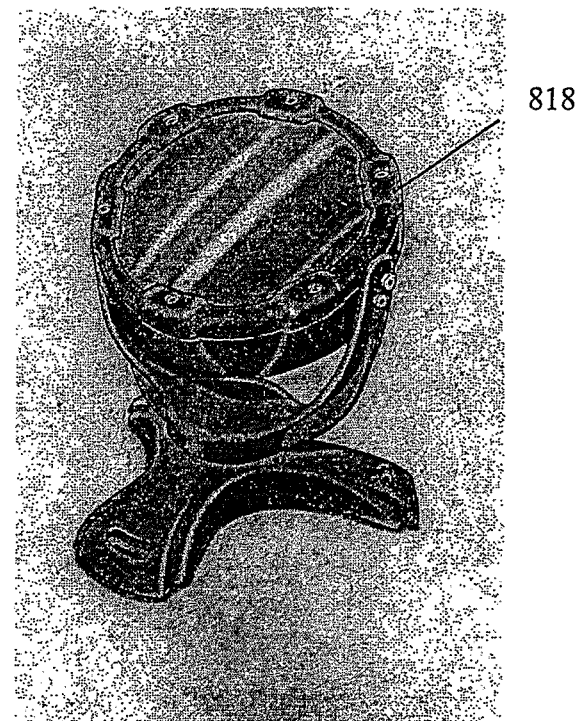


Fig. 9



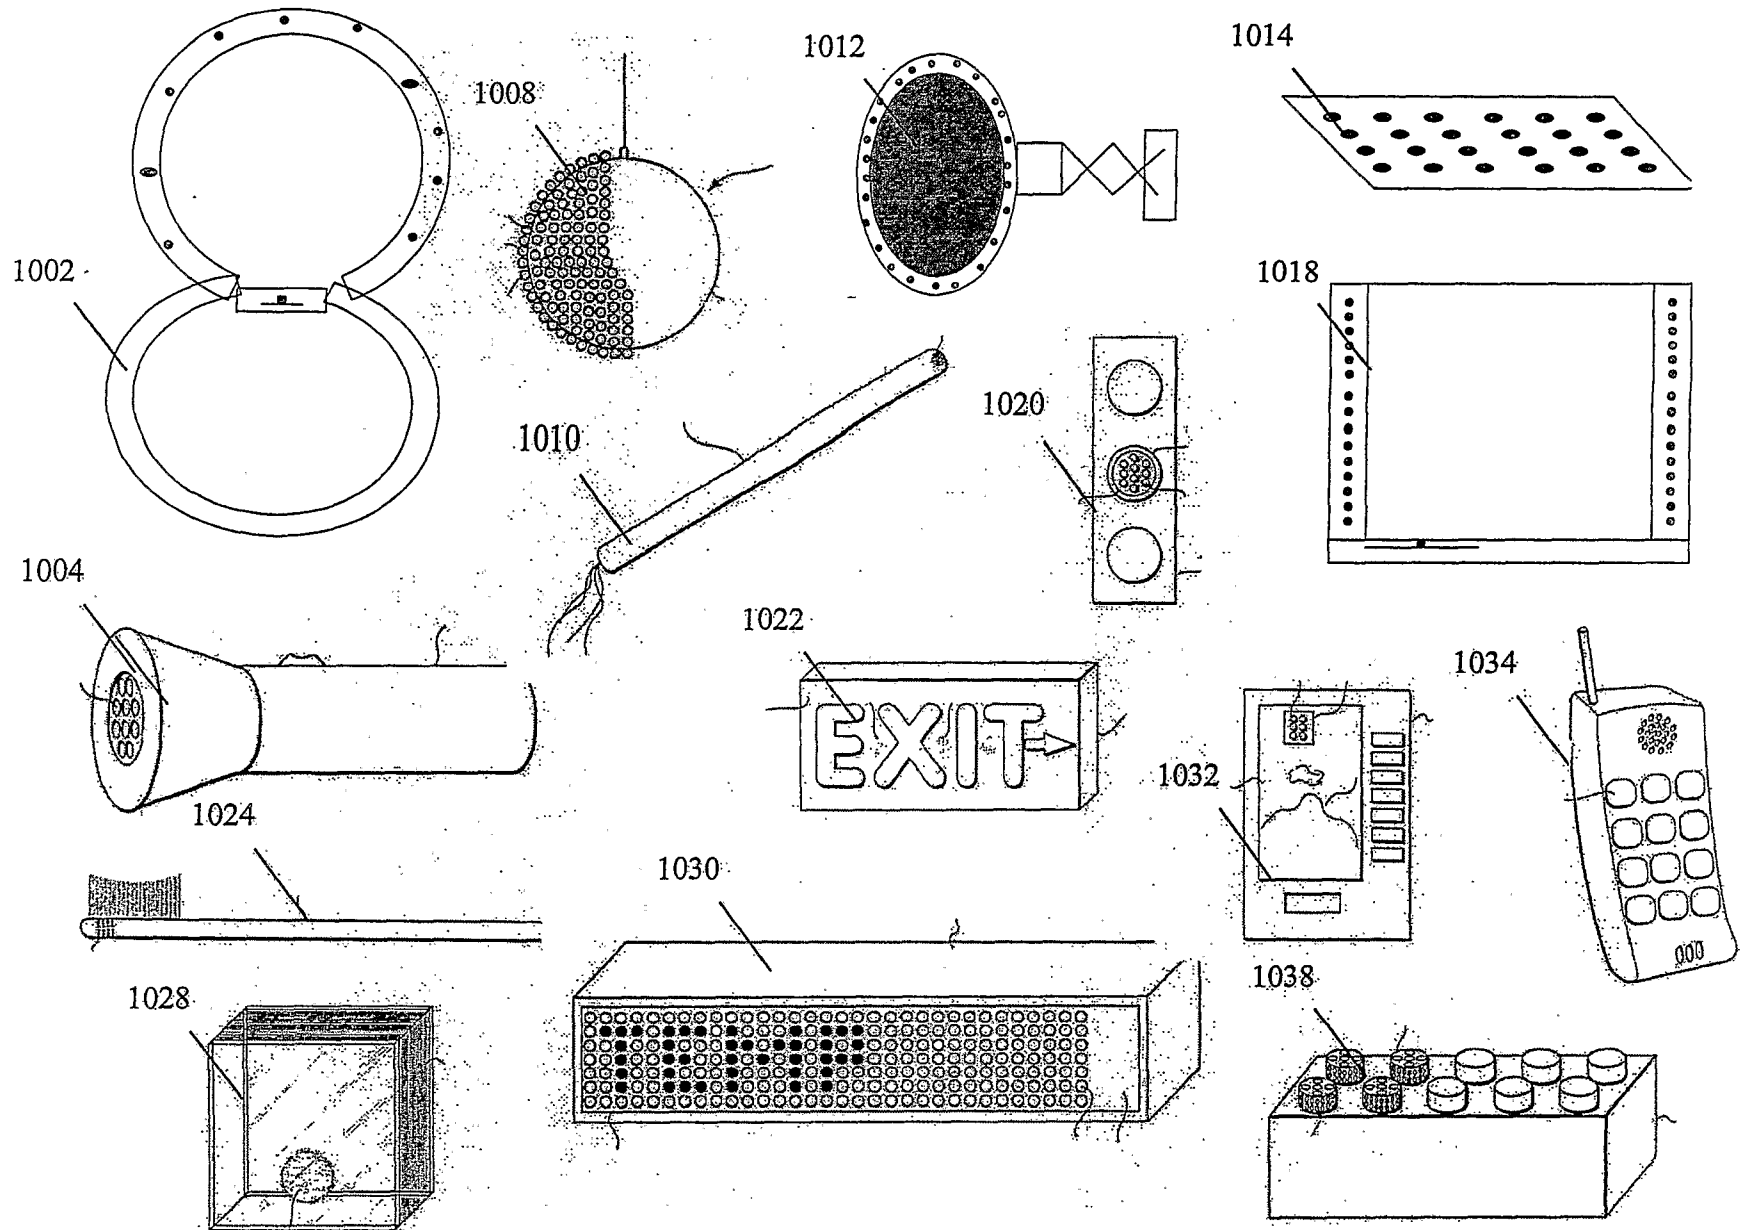


Fig. 10

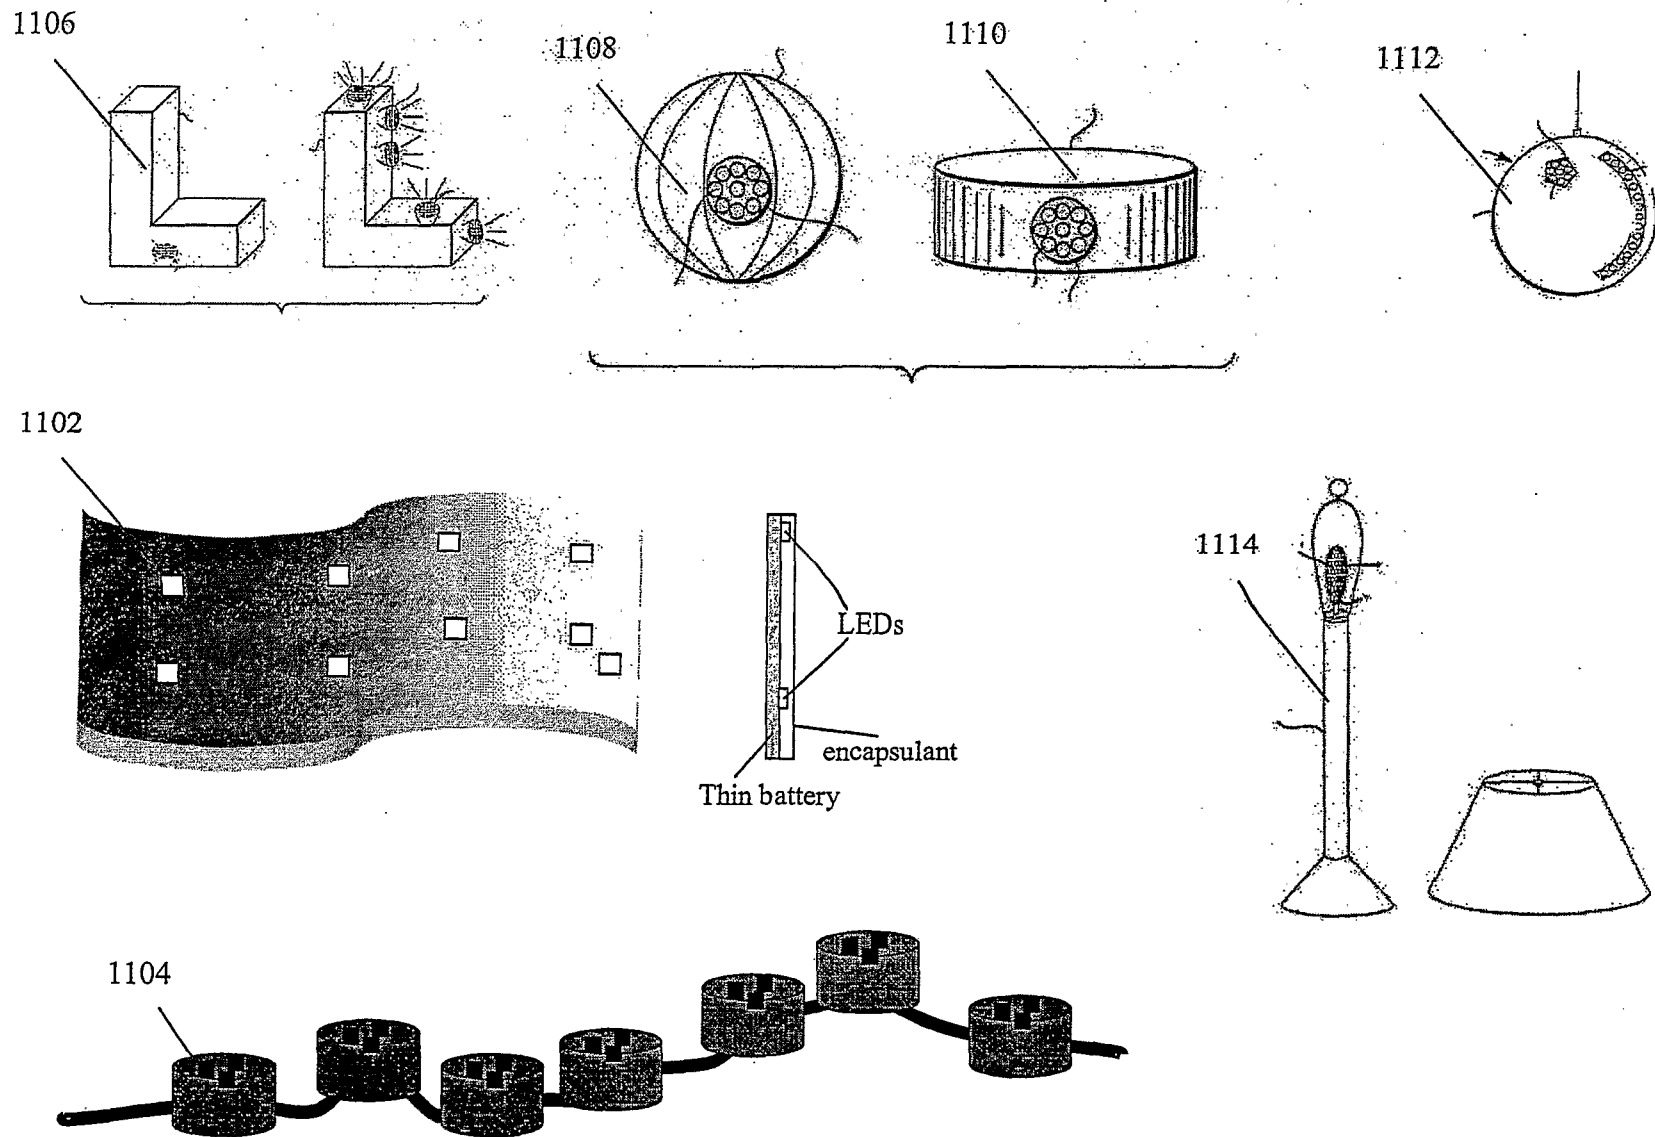


Fig. 11

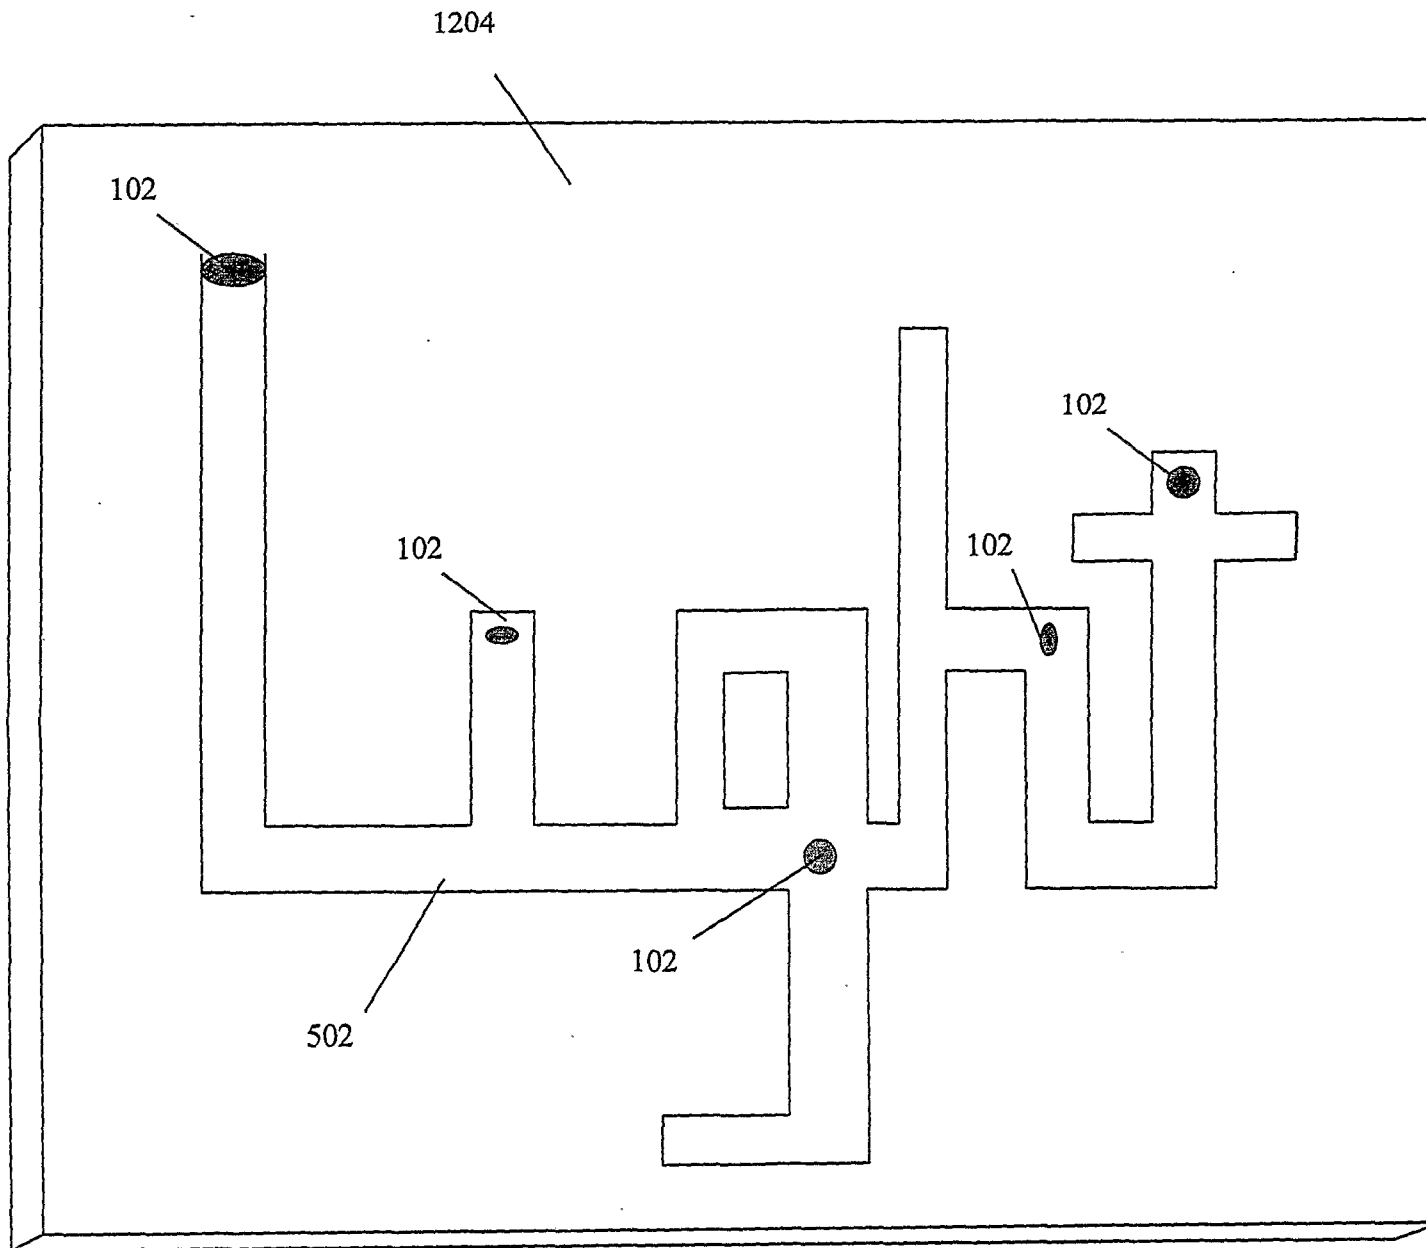


Fig. 12

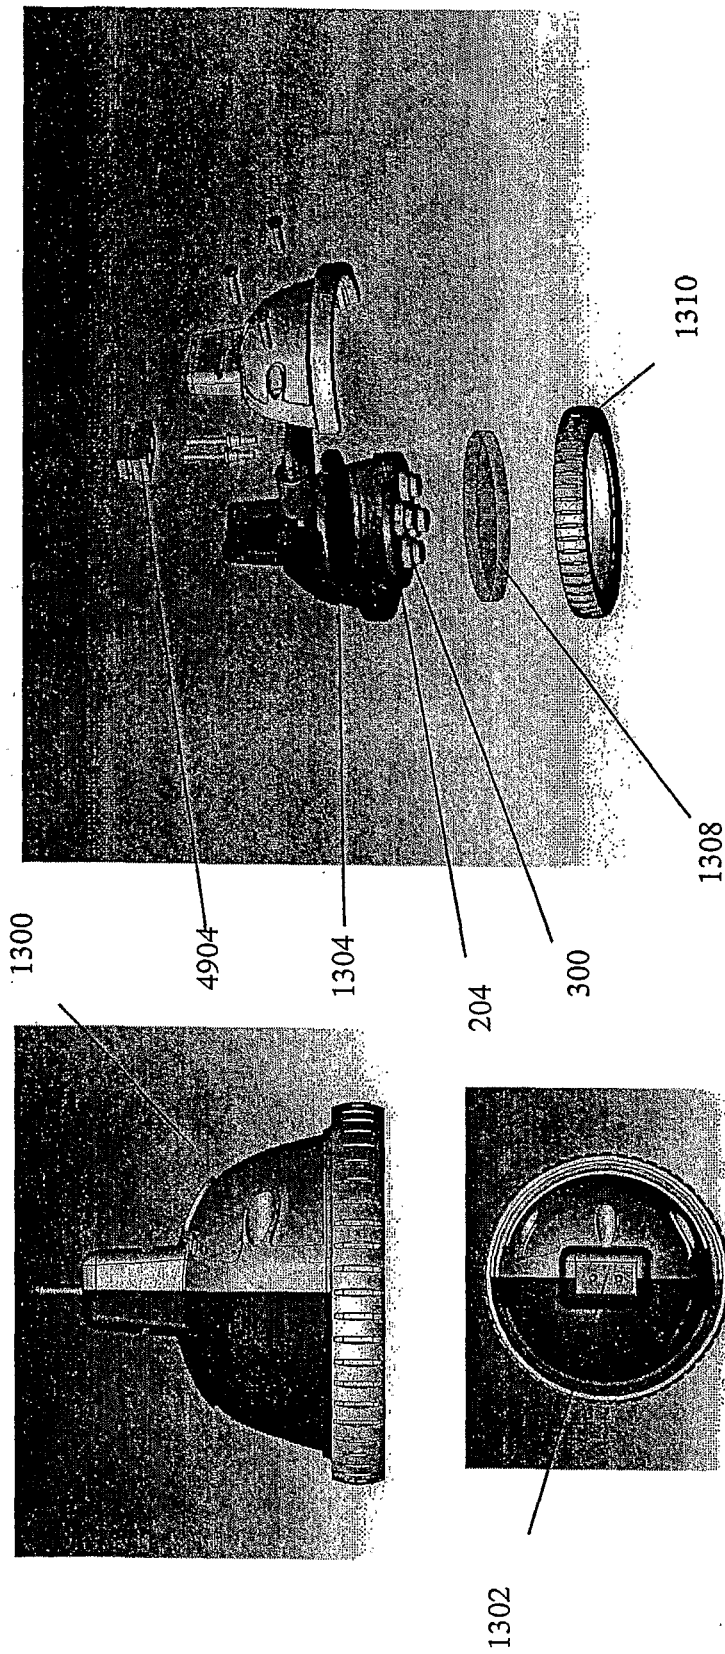
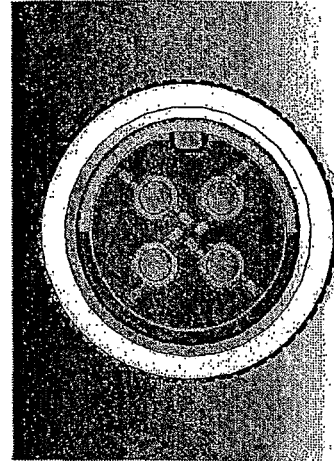
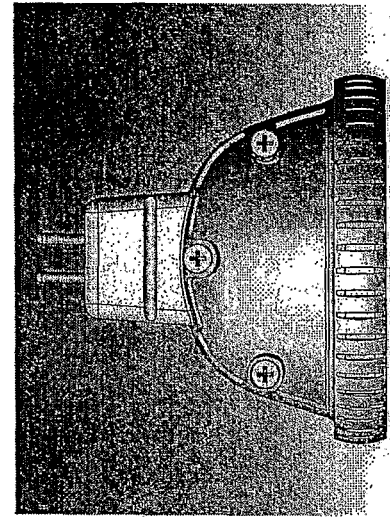
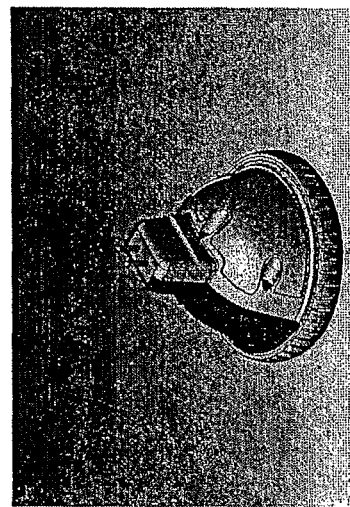


Fig. 13

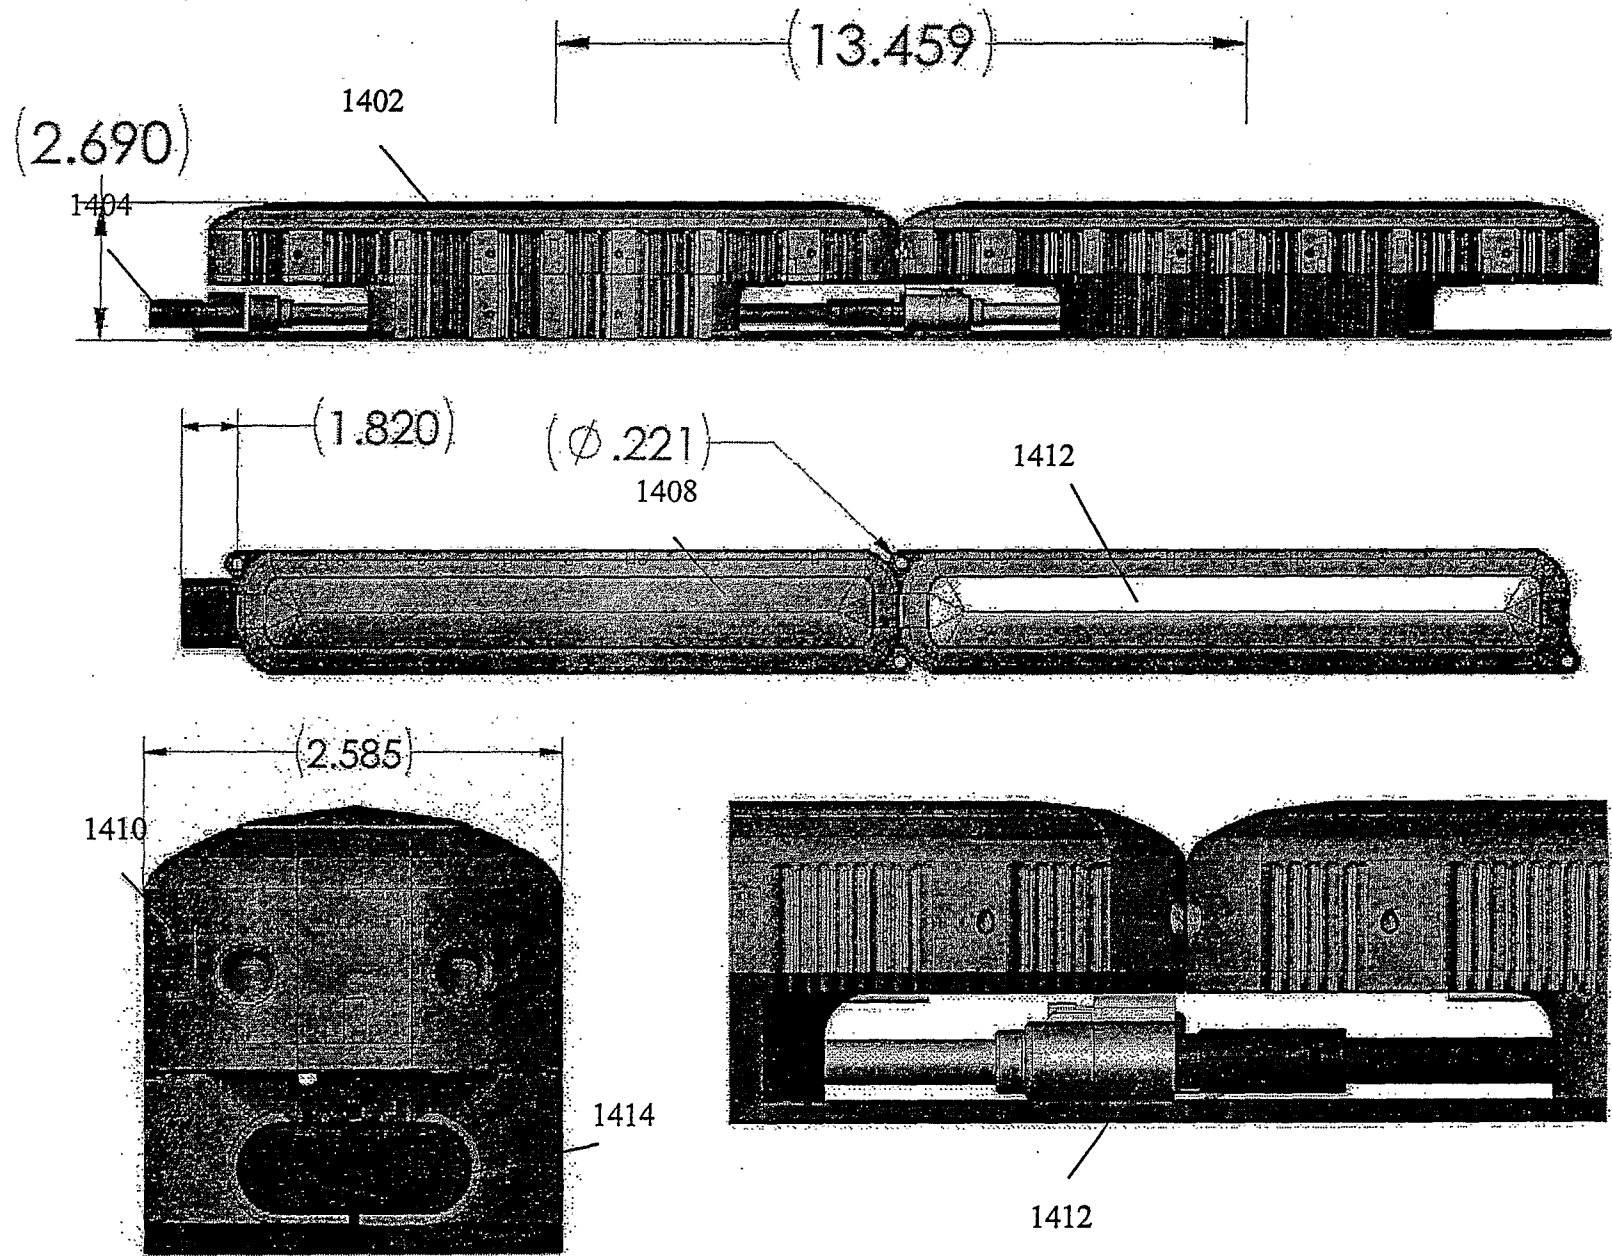


Fig. 14a

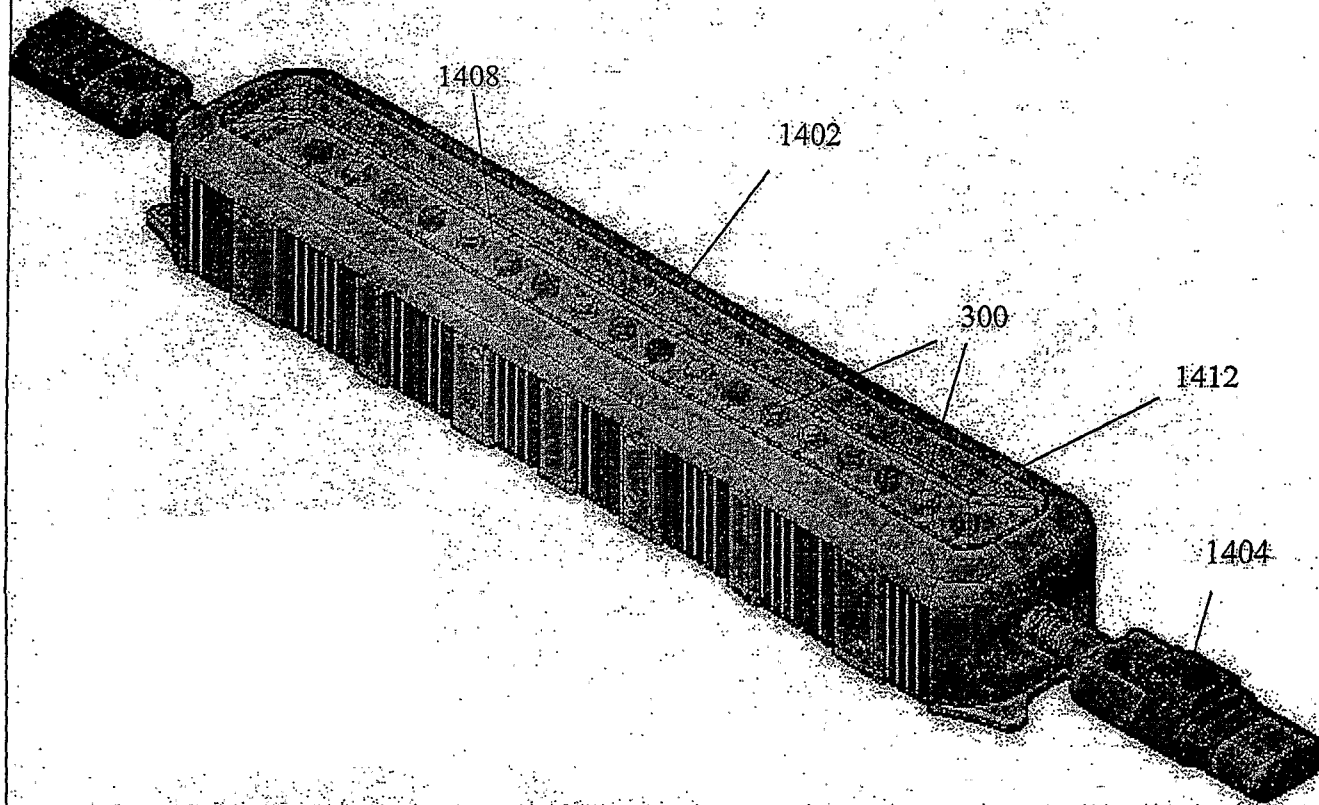


Fig. 14b

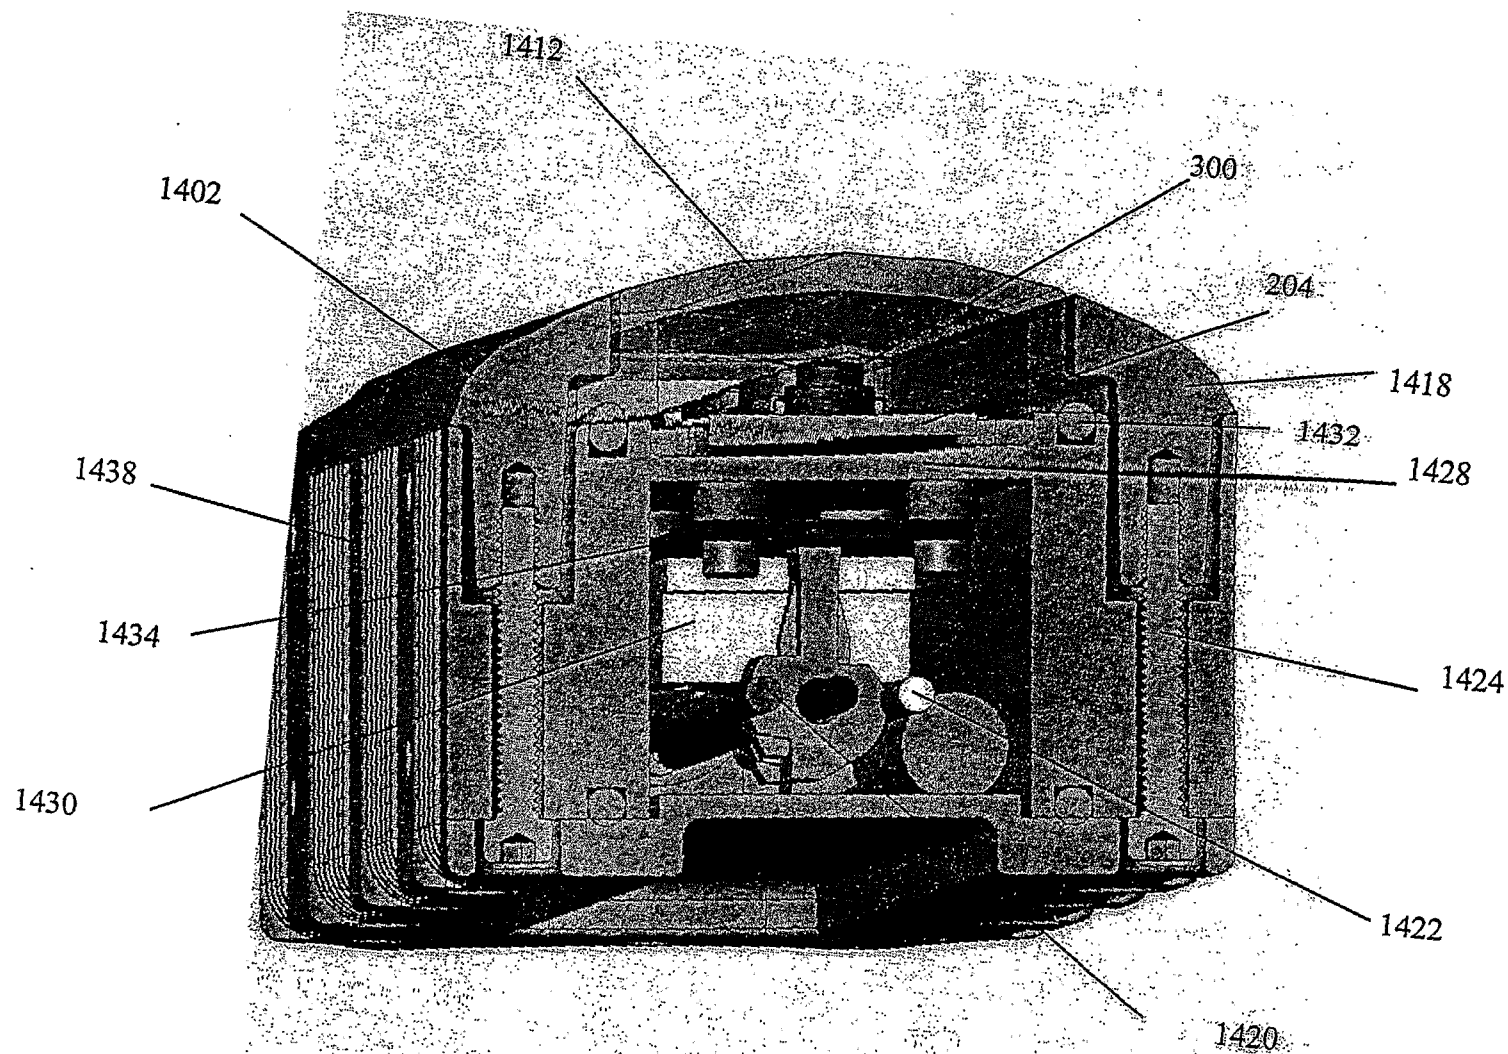


Fig. 14c

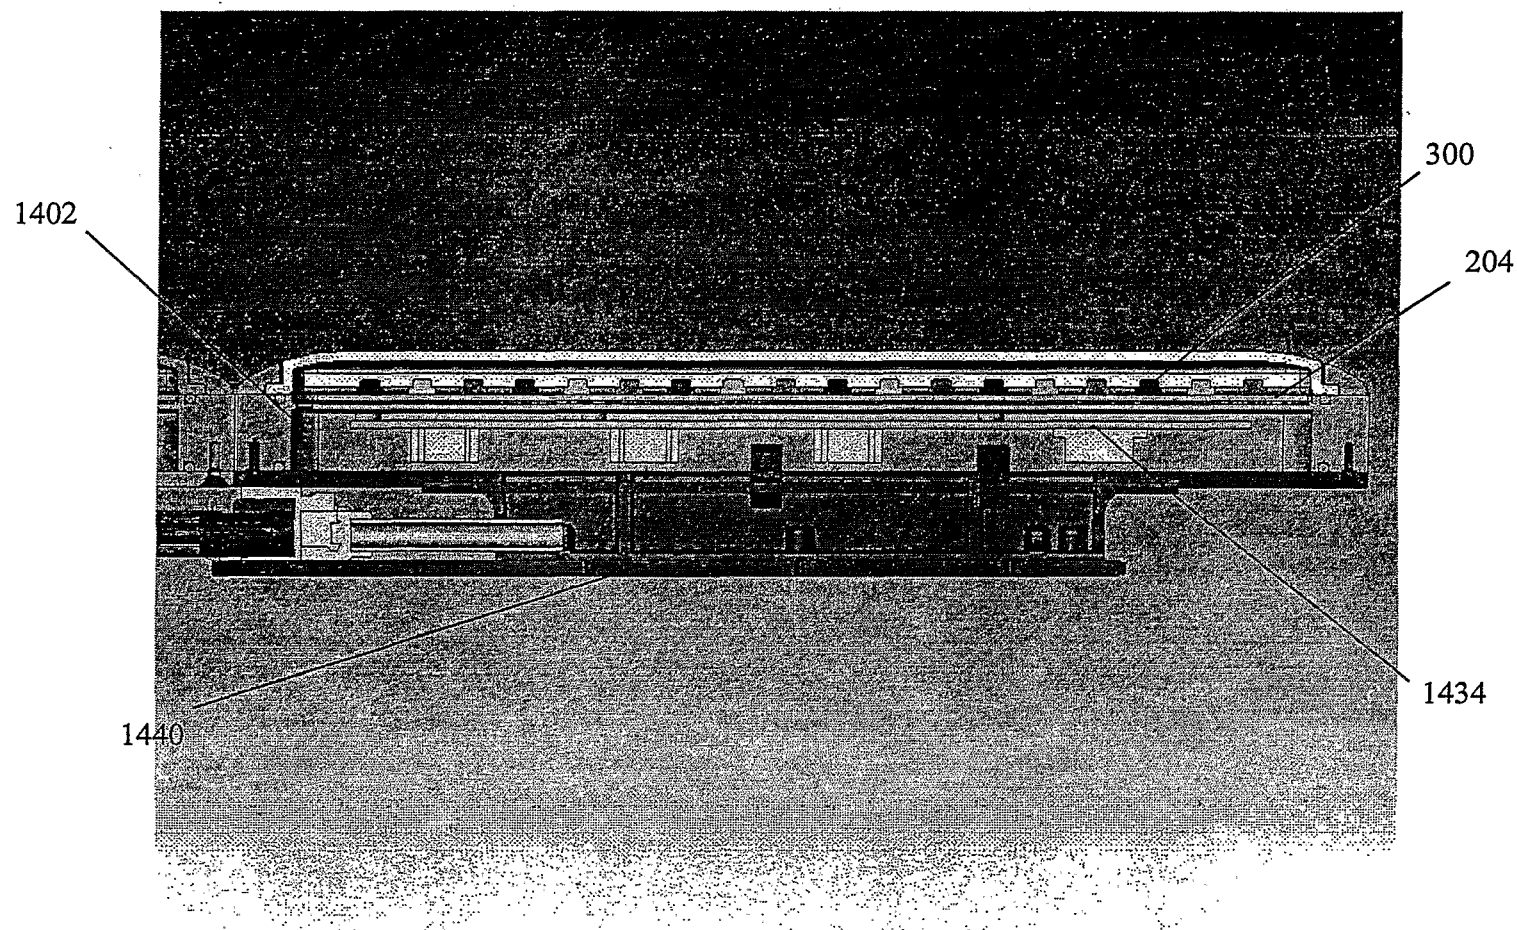


Fig. 14d

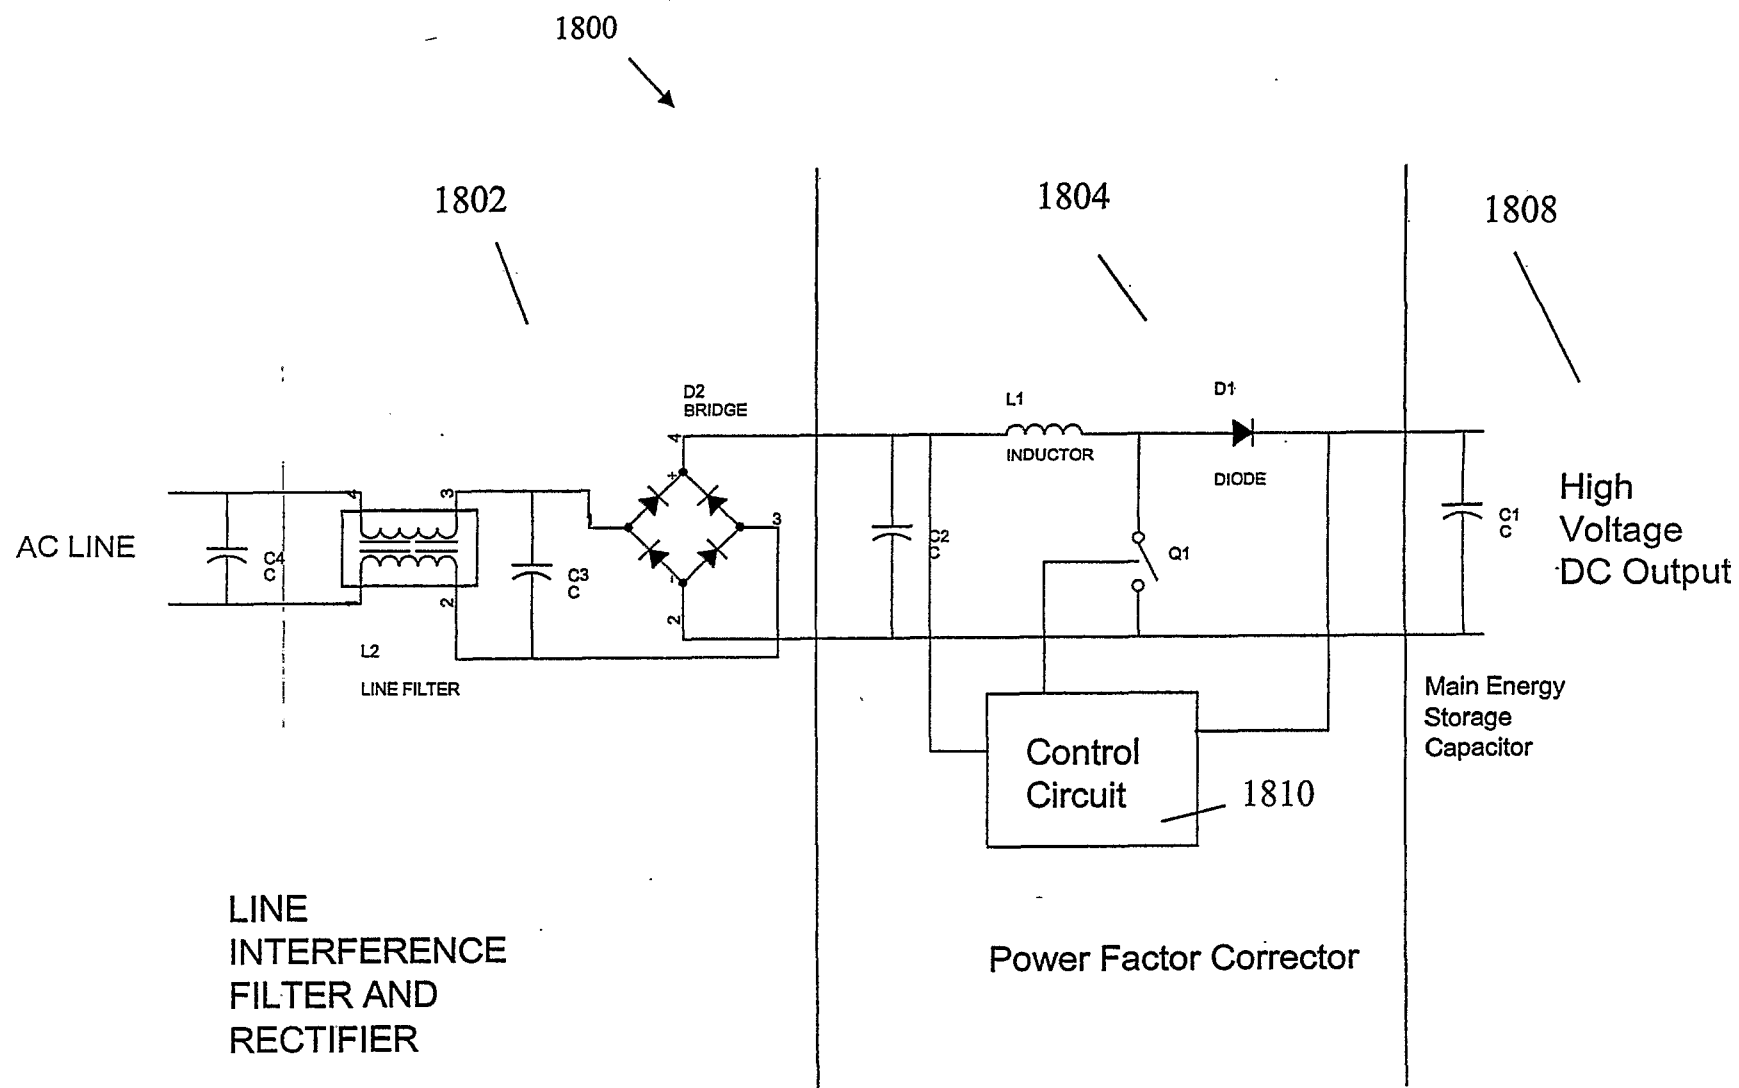


Fig. 15

Fig. 16a

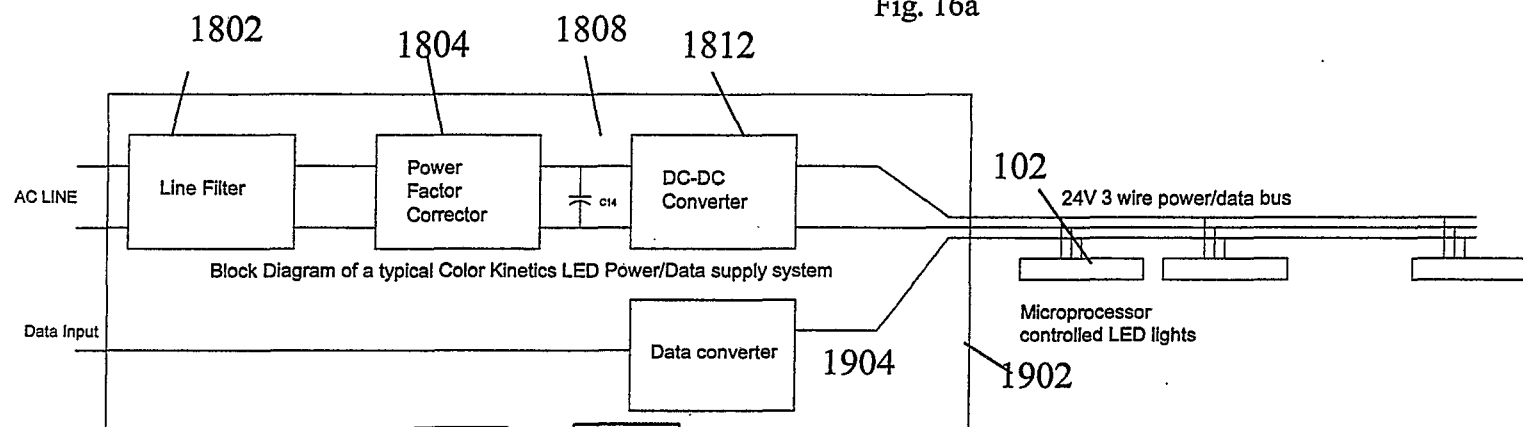
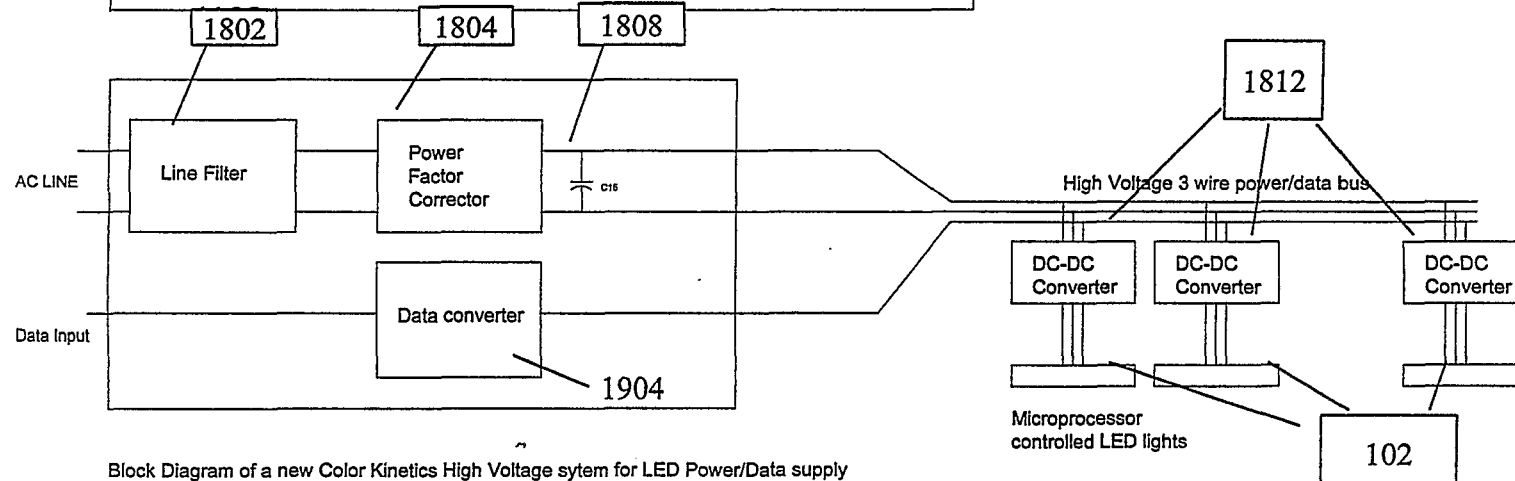


Fig. 16b

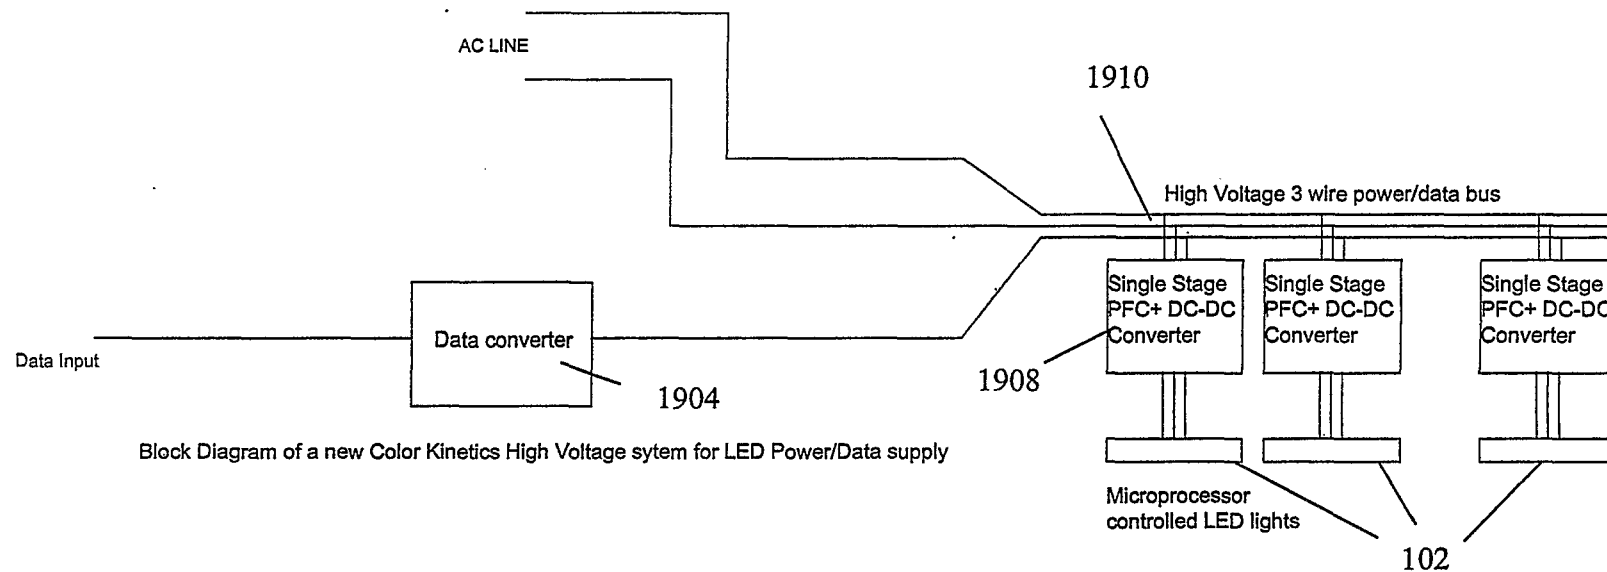


Fig. 17

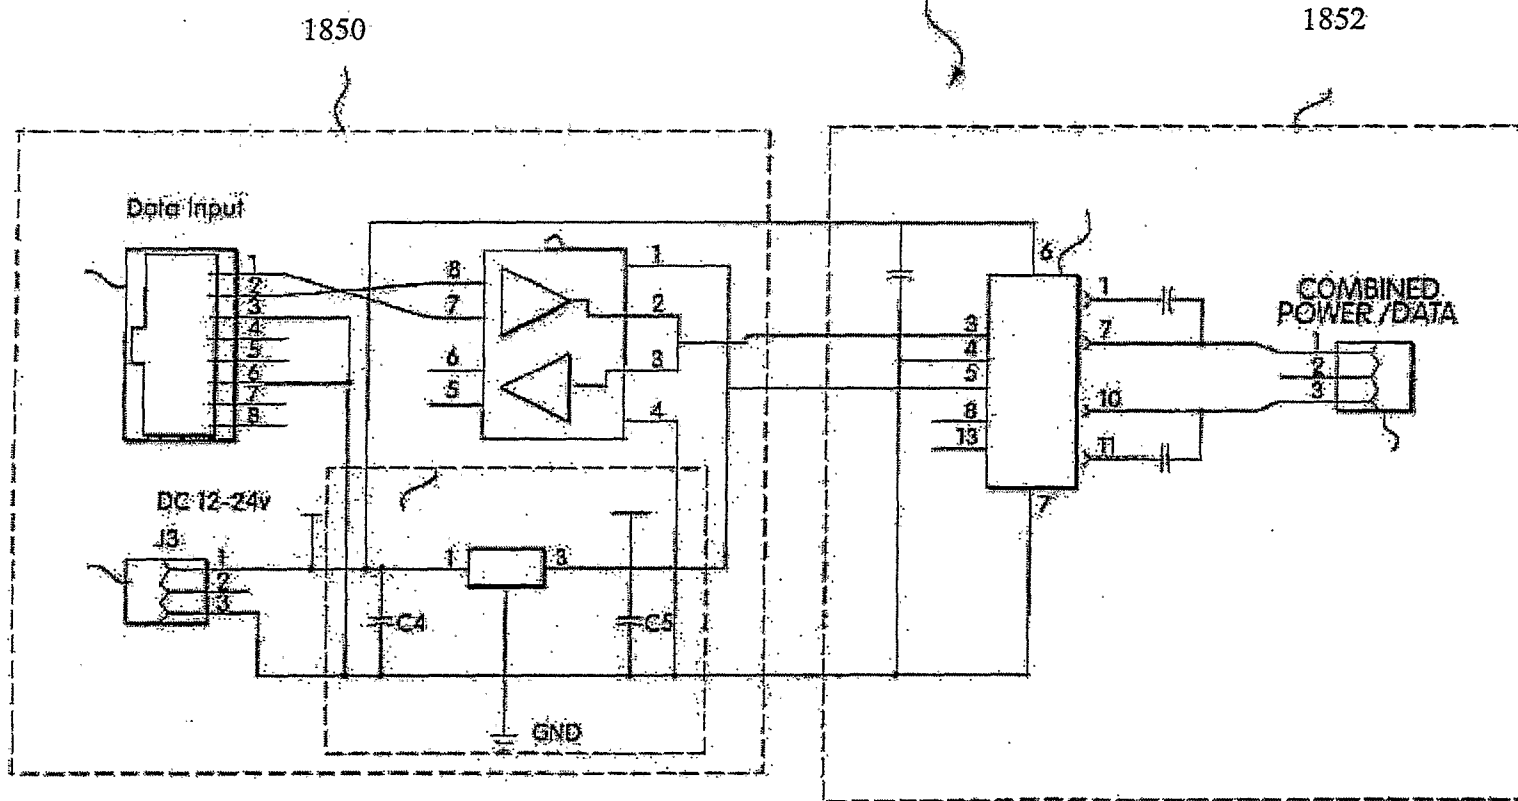


Fig. 18

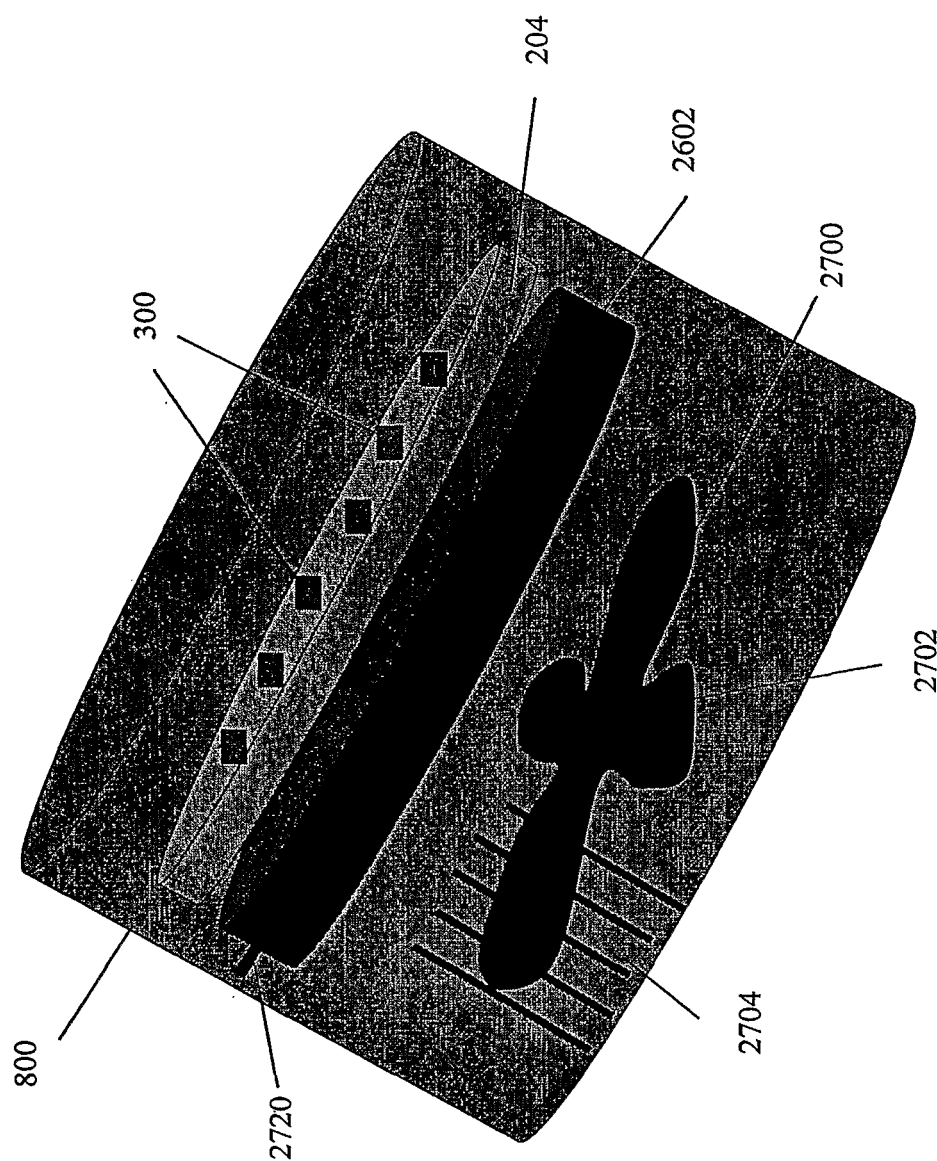


Fig. 19

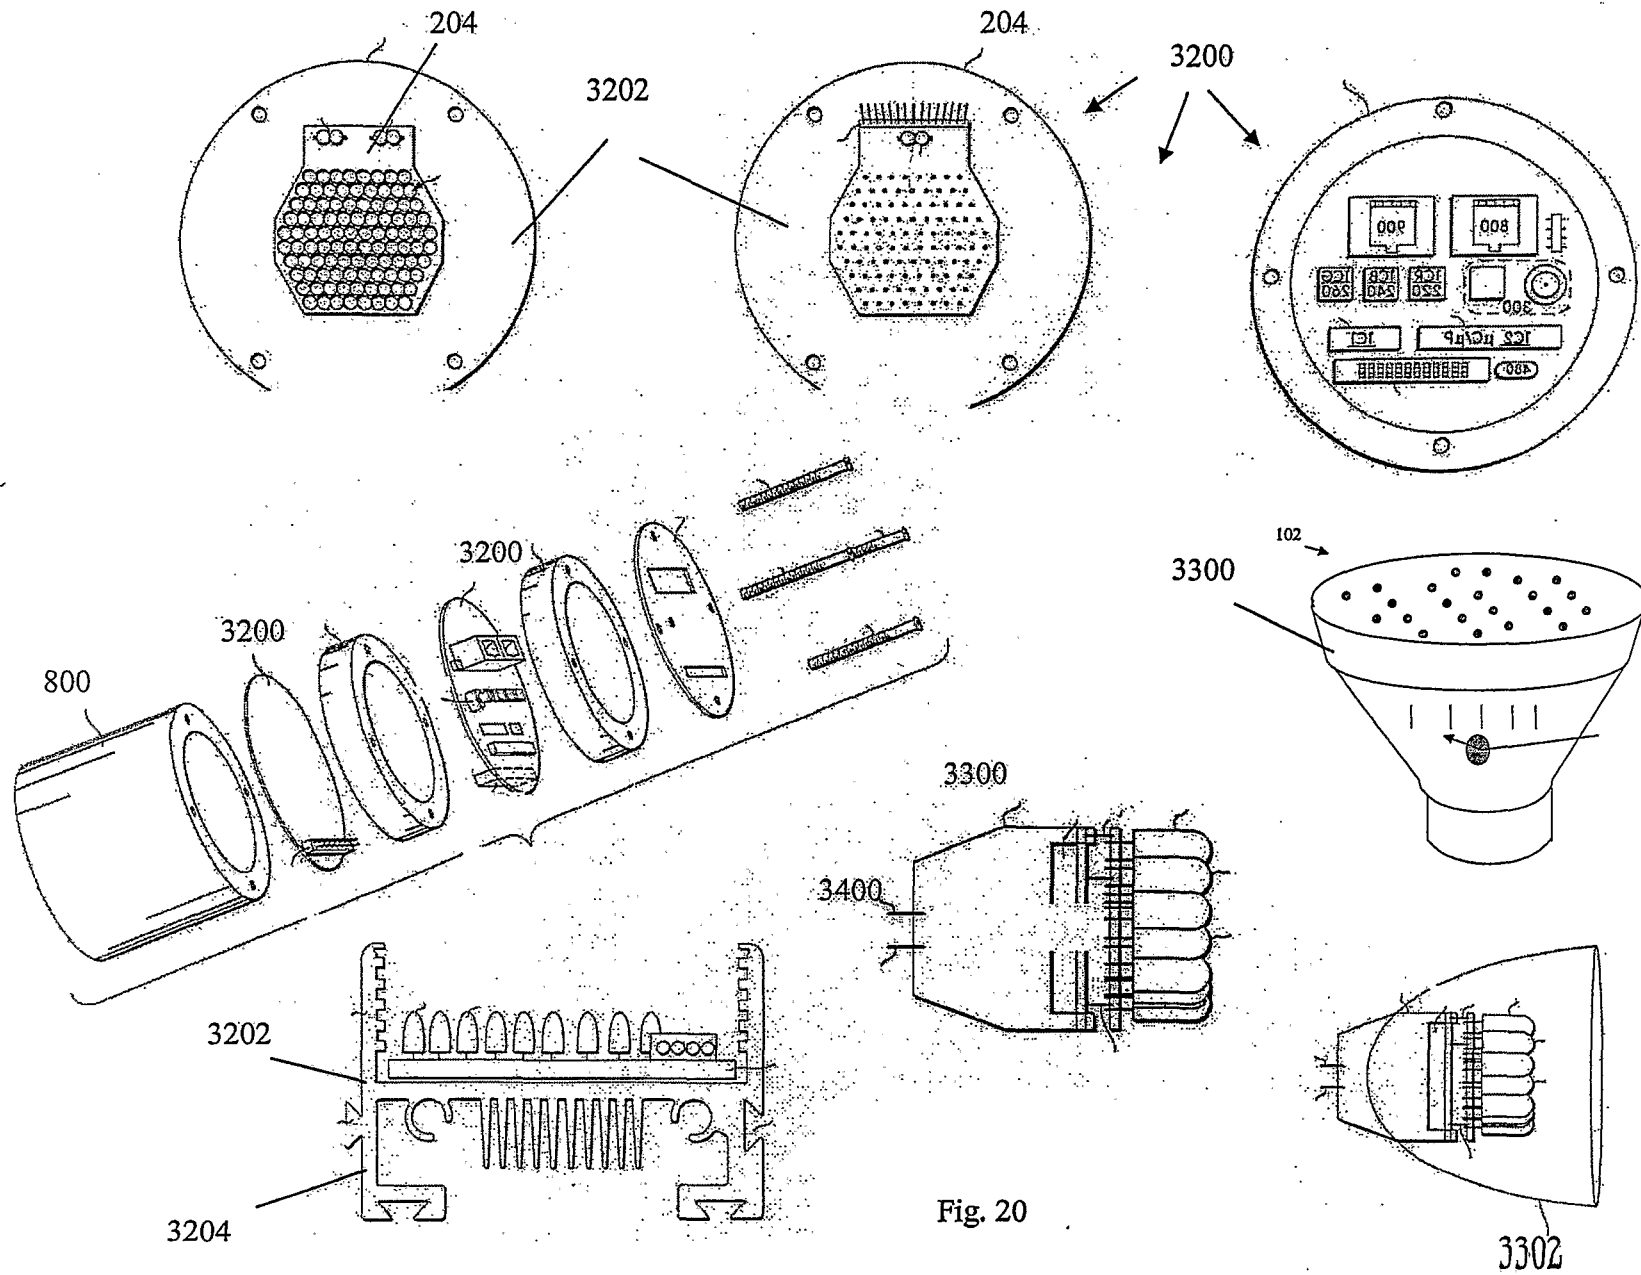


Fig. 20



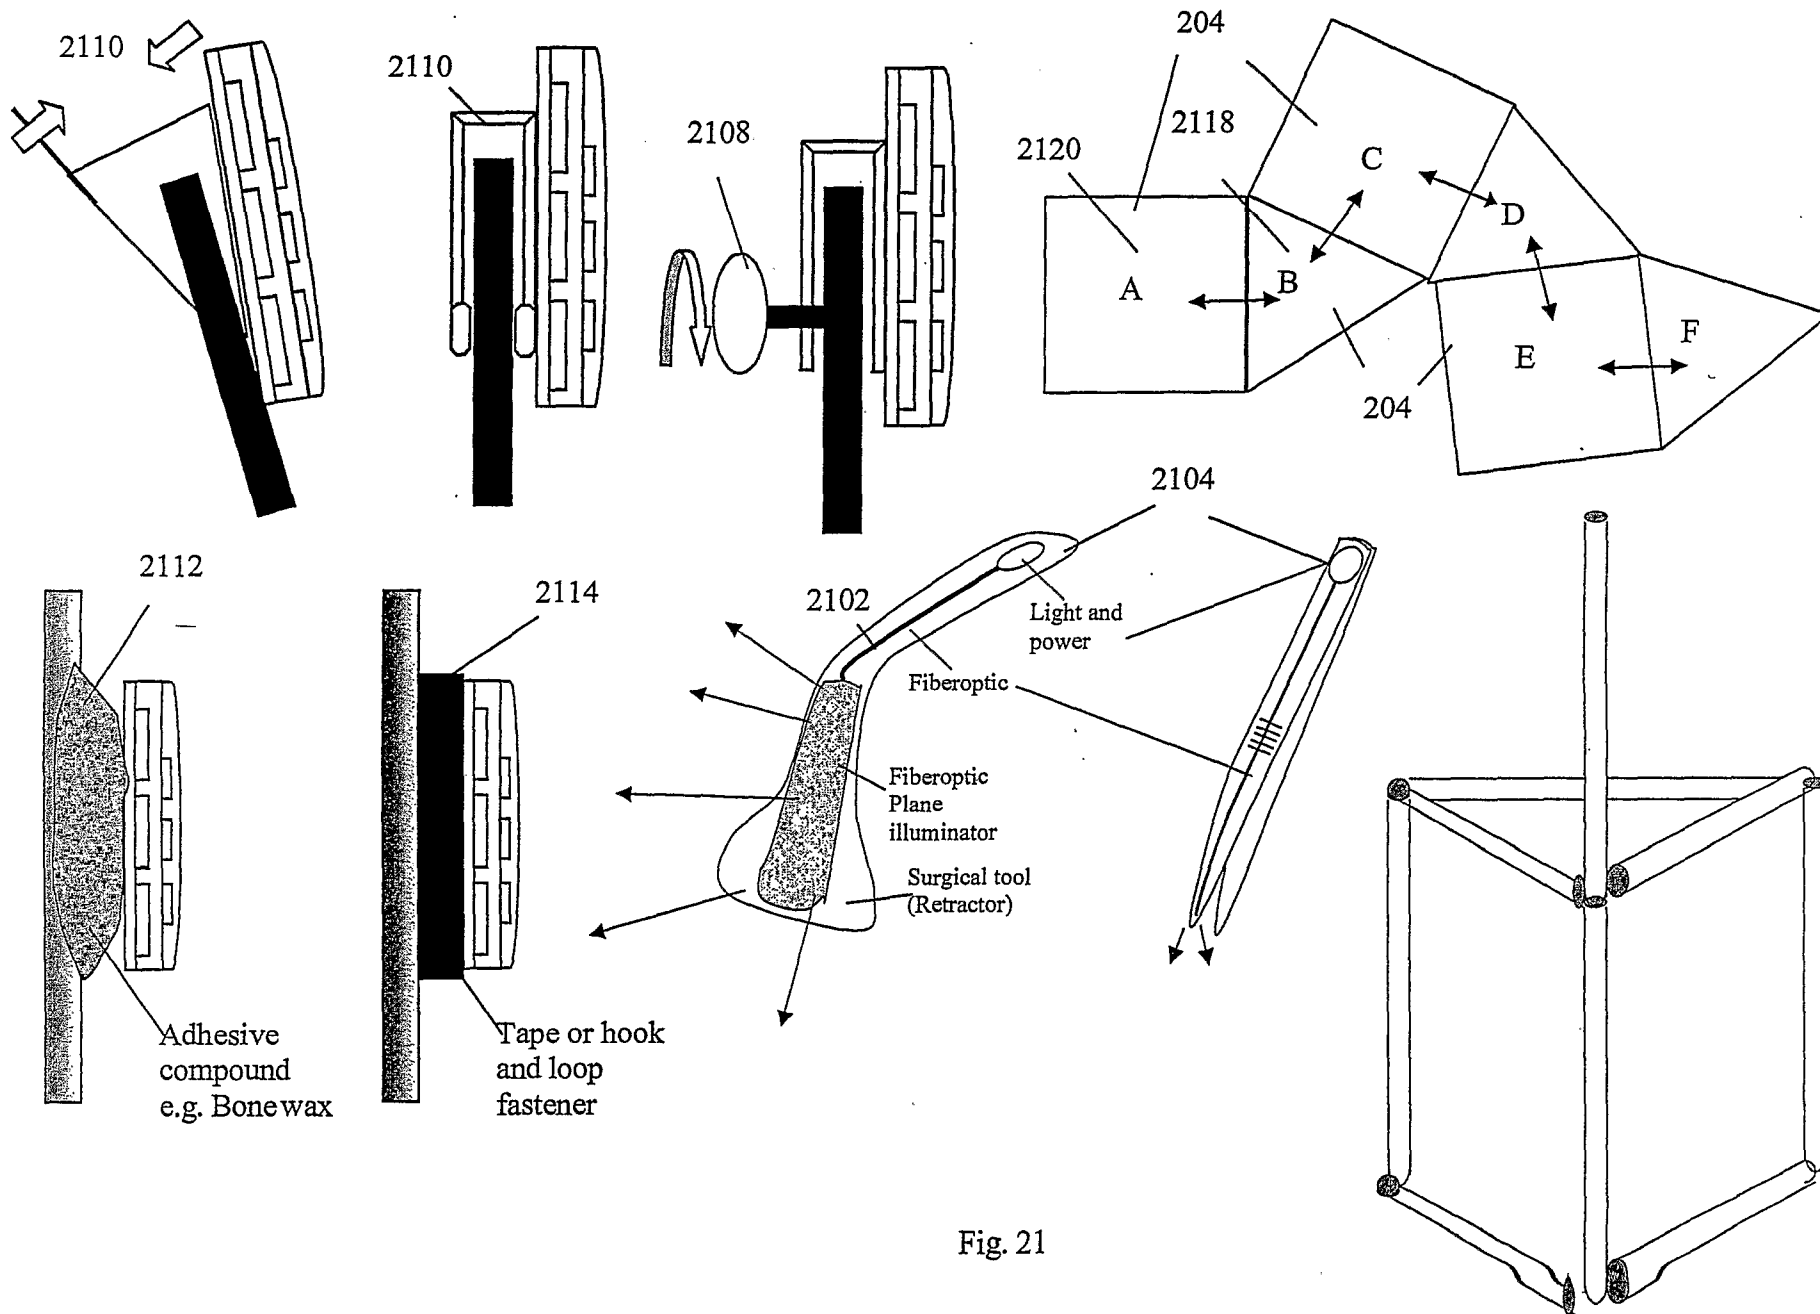



Fig. 21

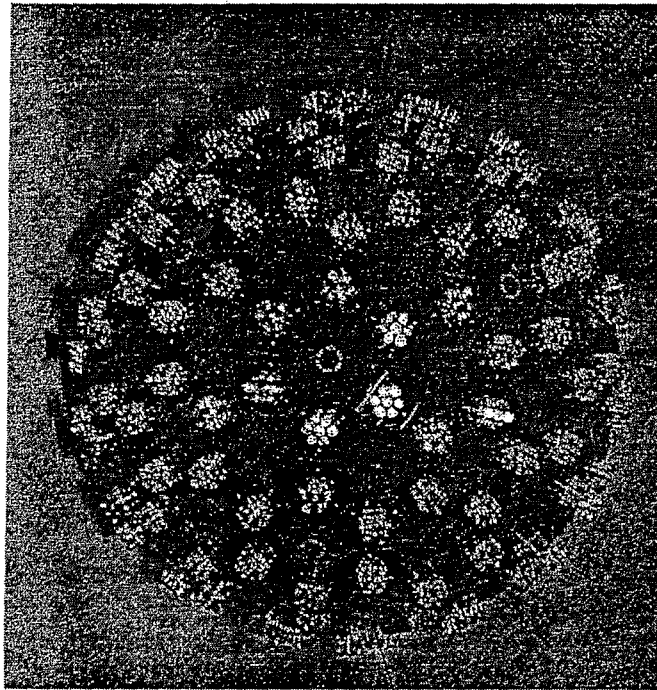

2204

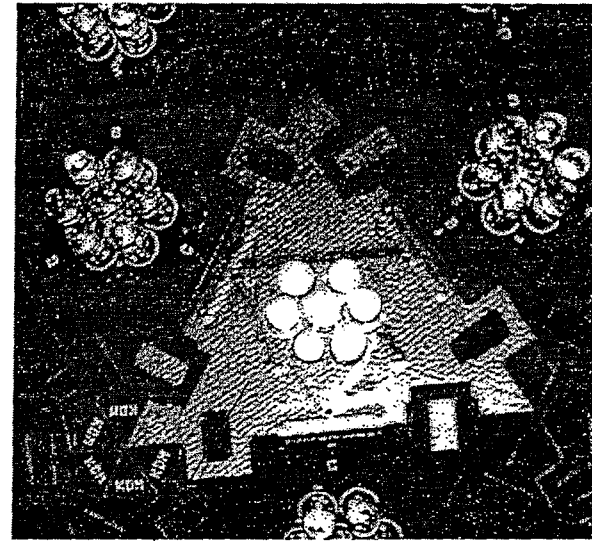

2118

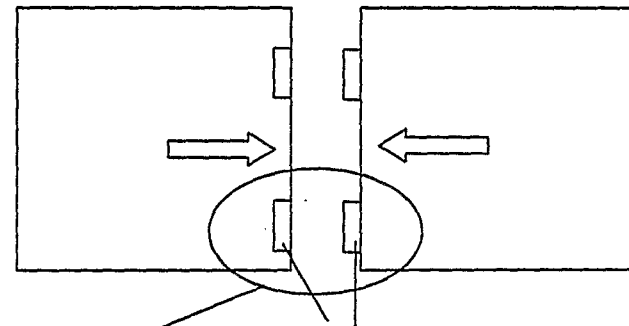

Mechanical and Electrical 2202
connection

Fig. 22a

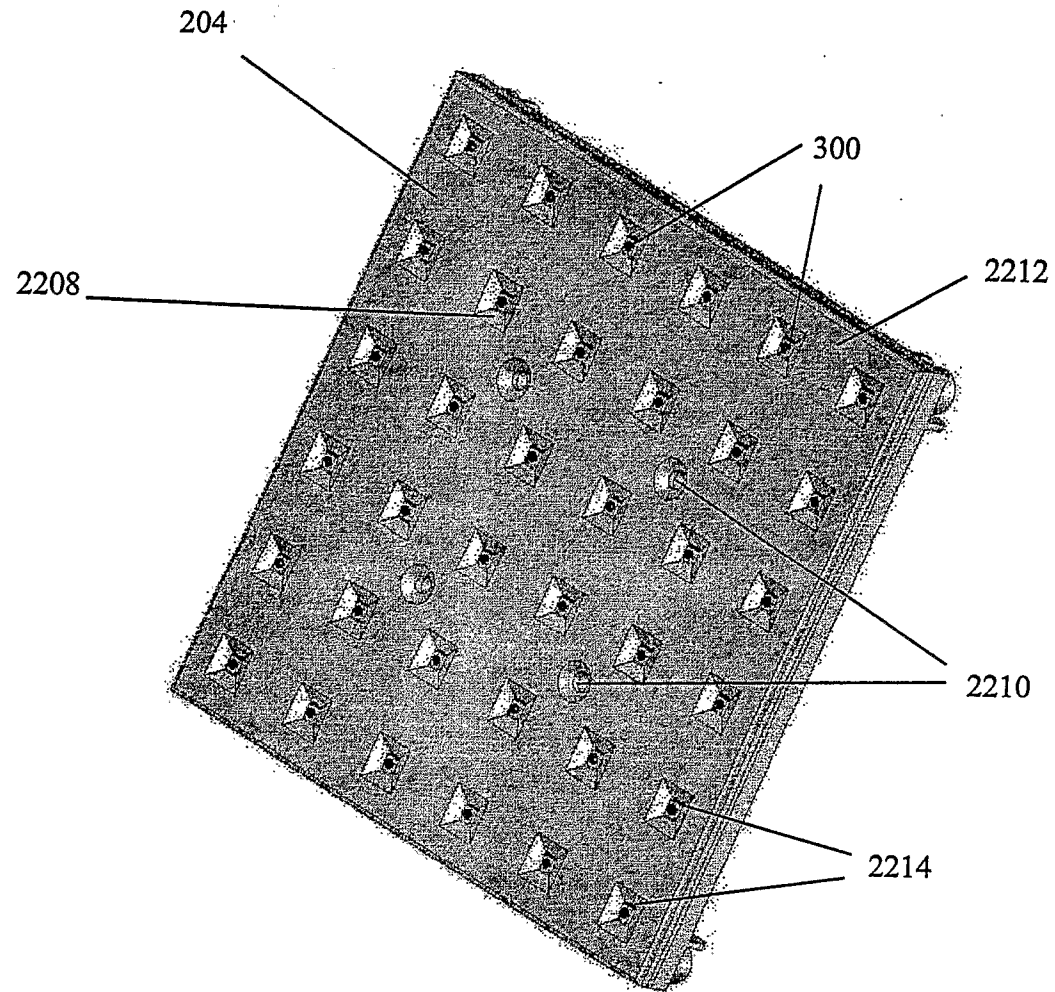


Fig. 22b

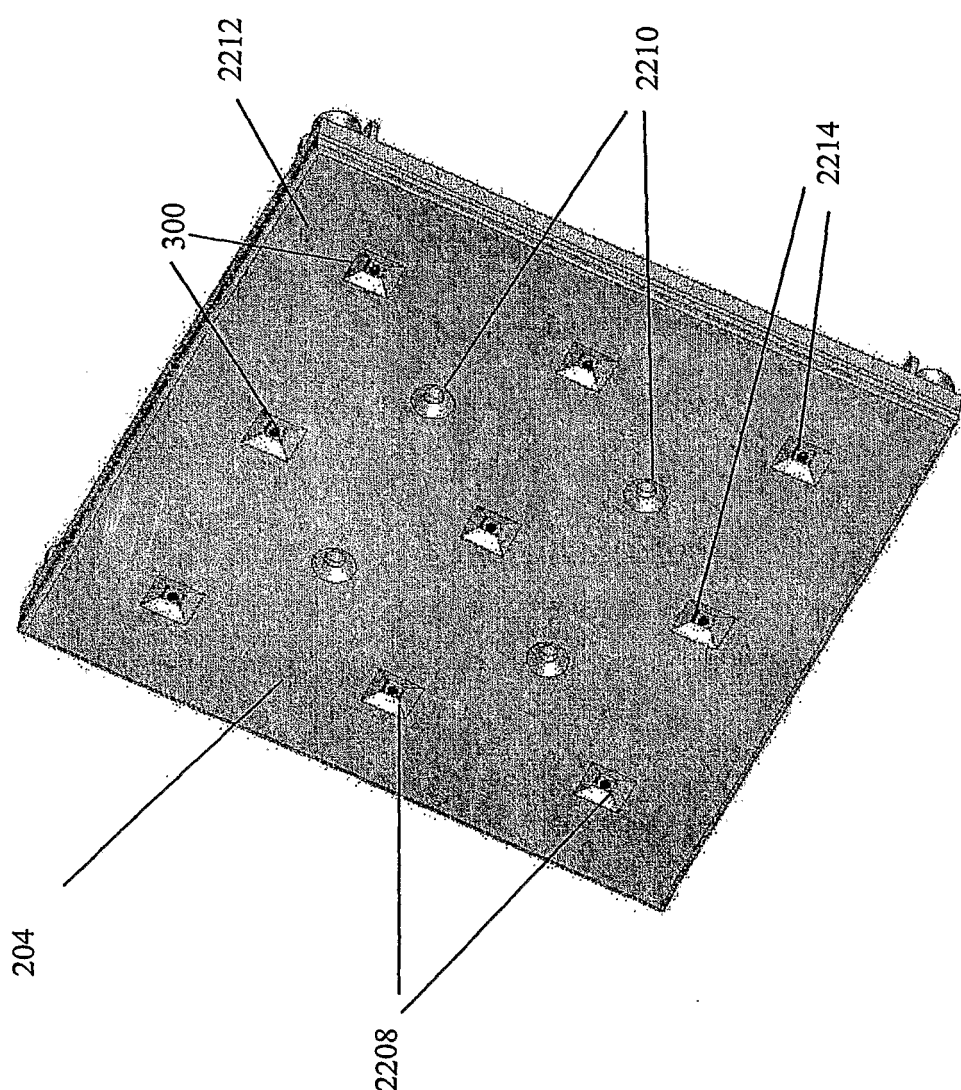


Fig. 22c

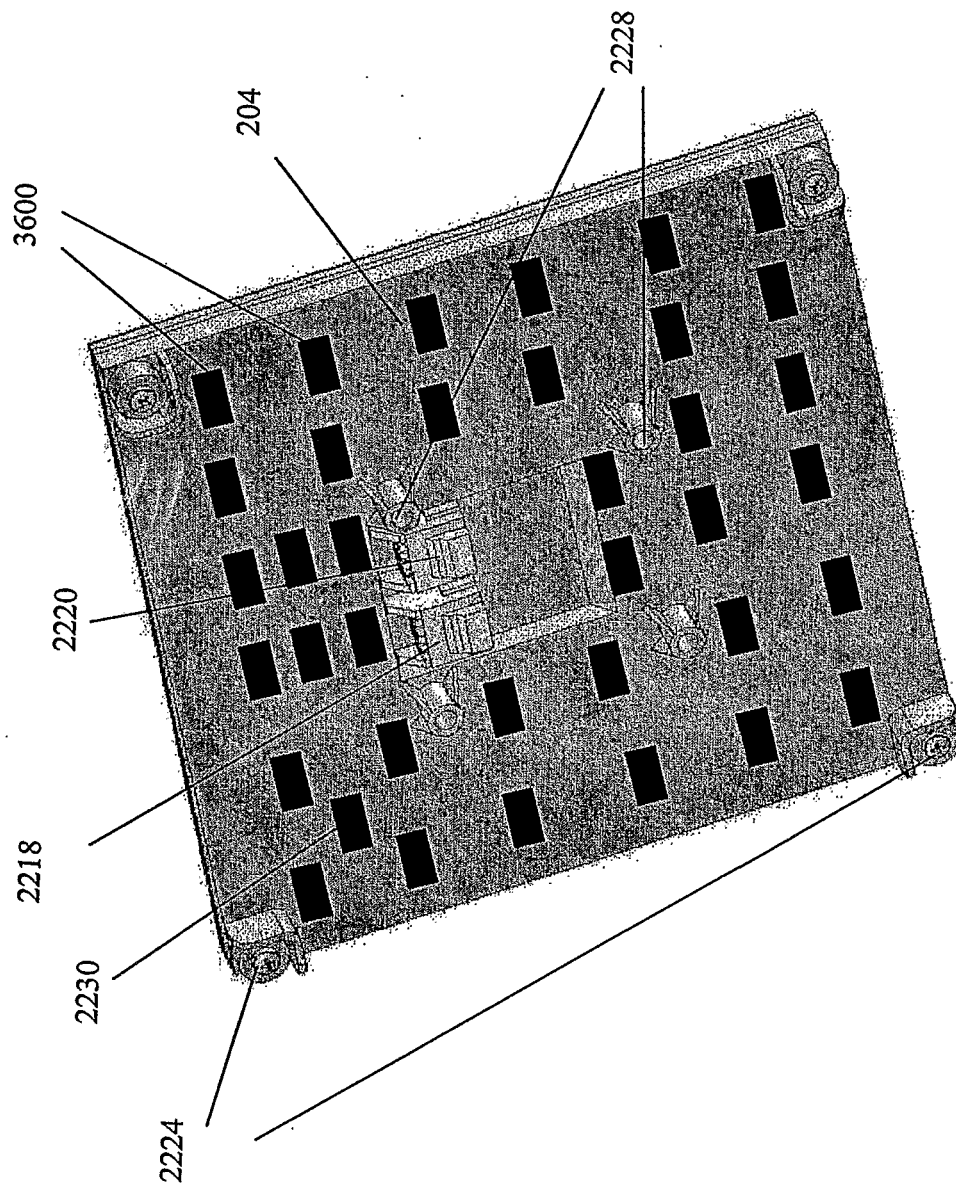


Fig. 22d

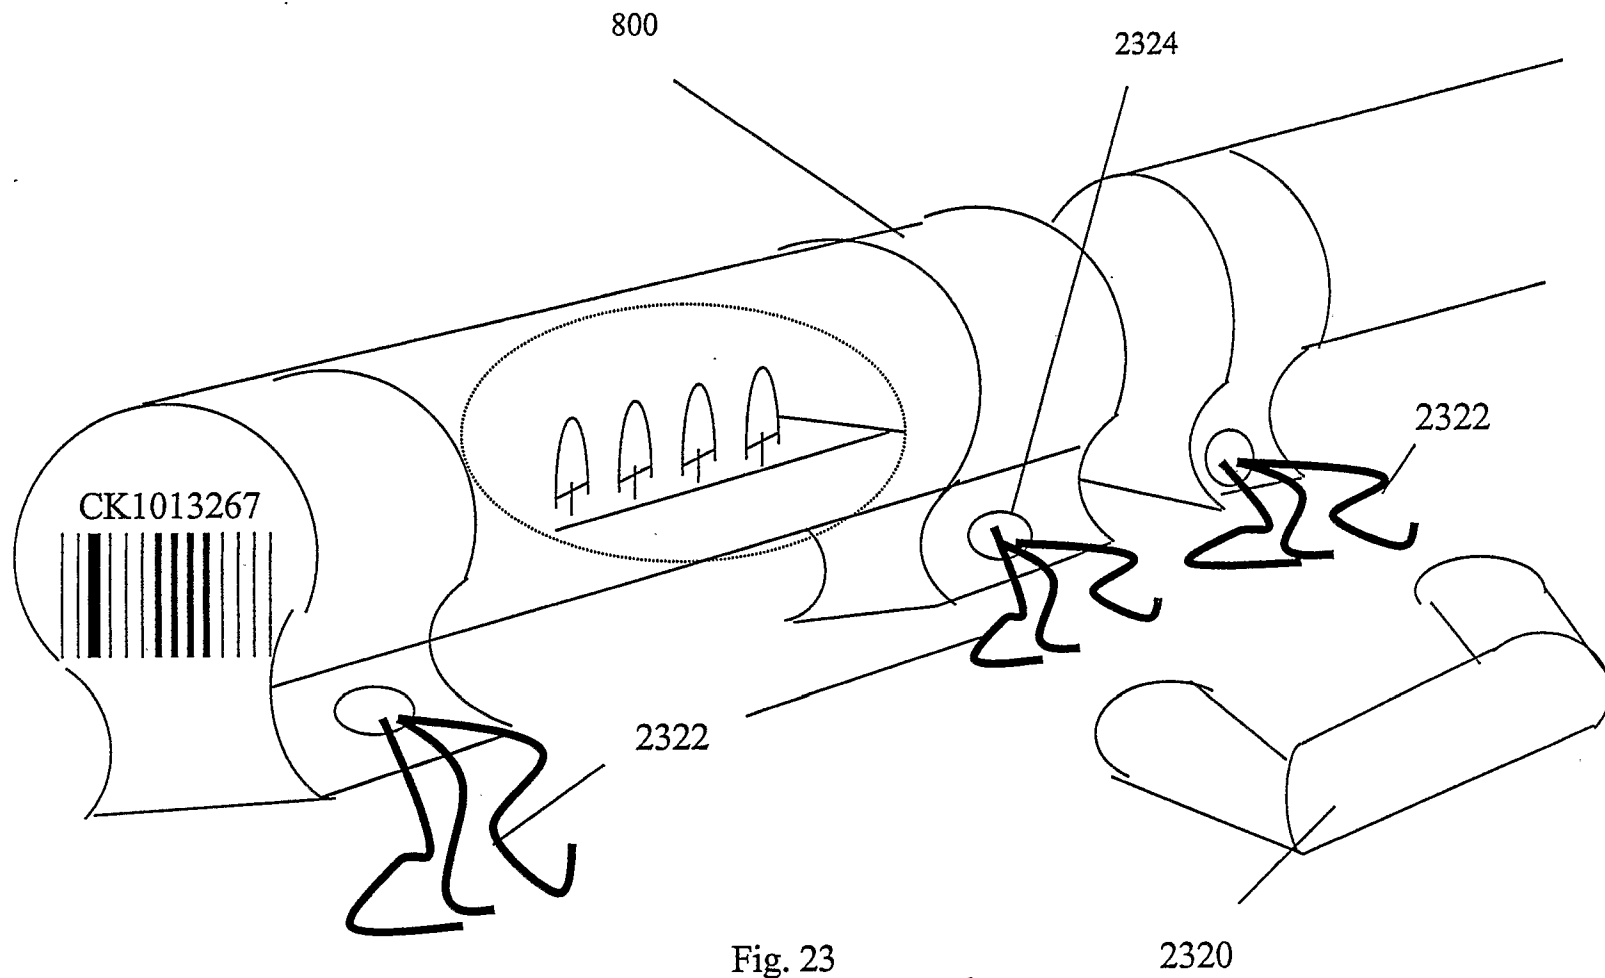


Fig. 23

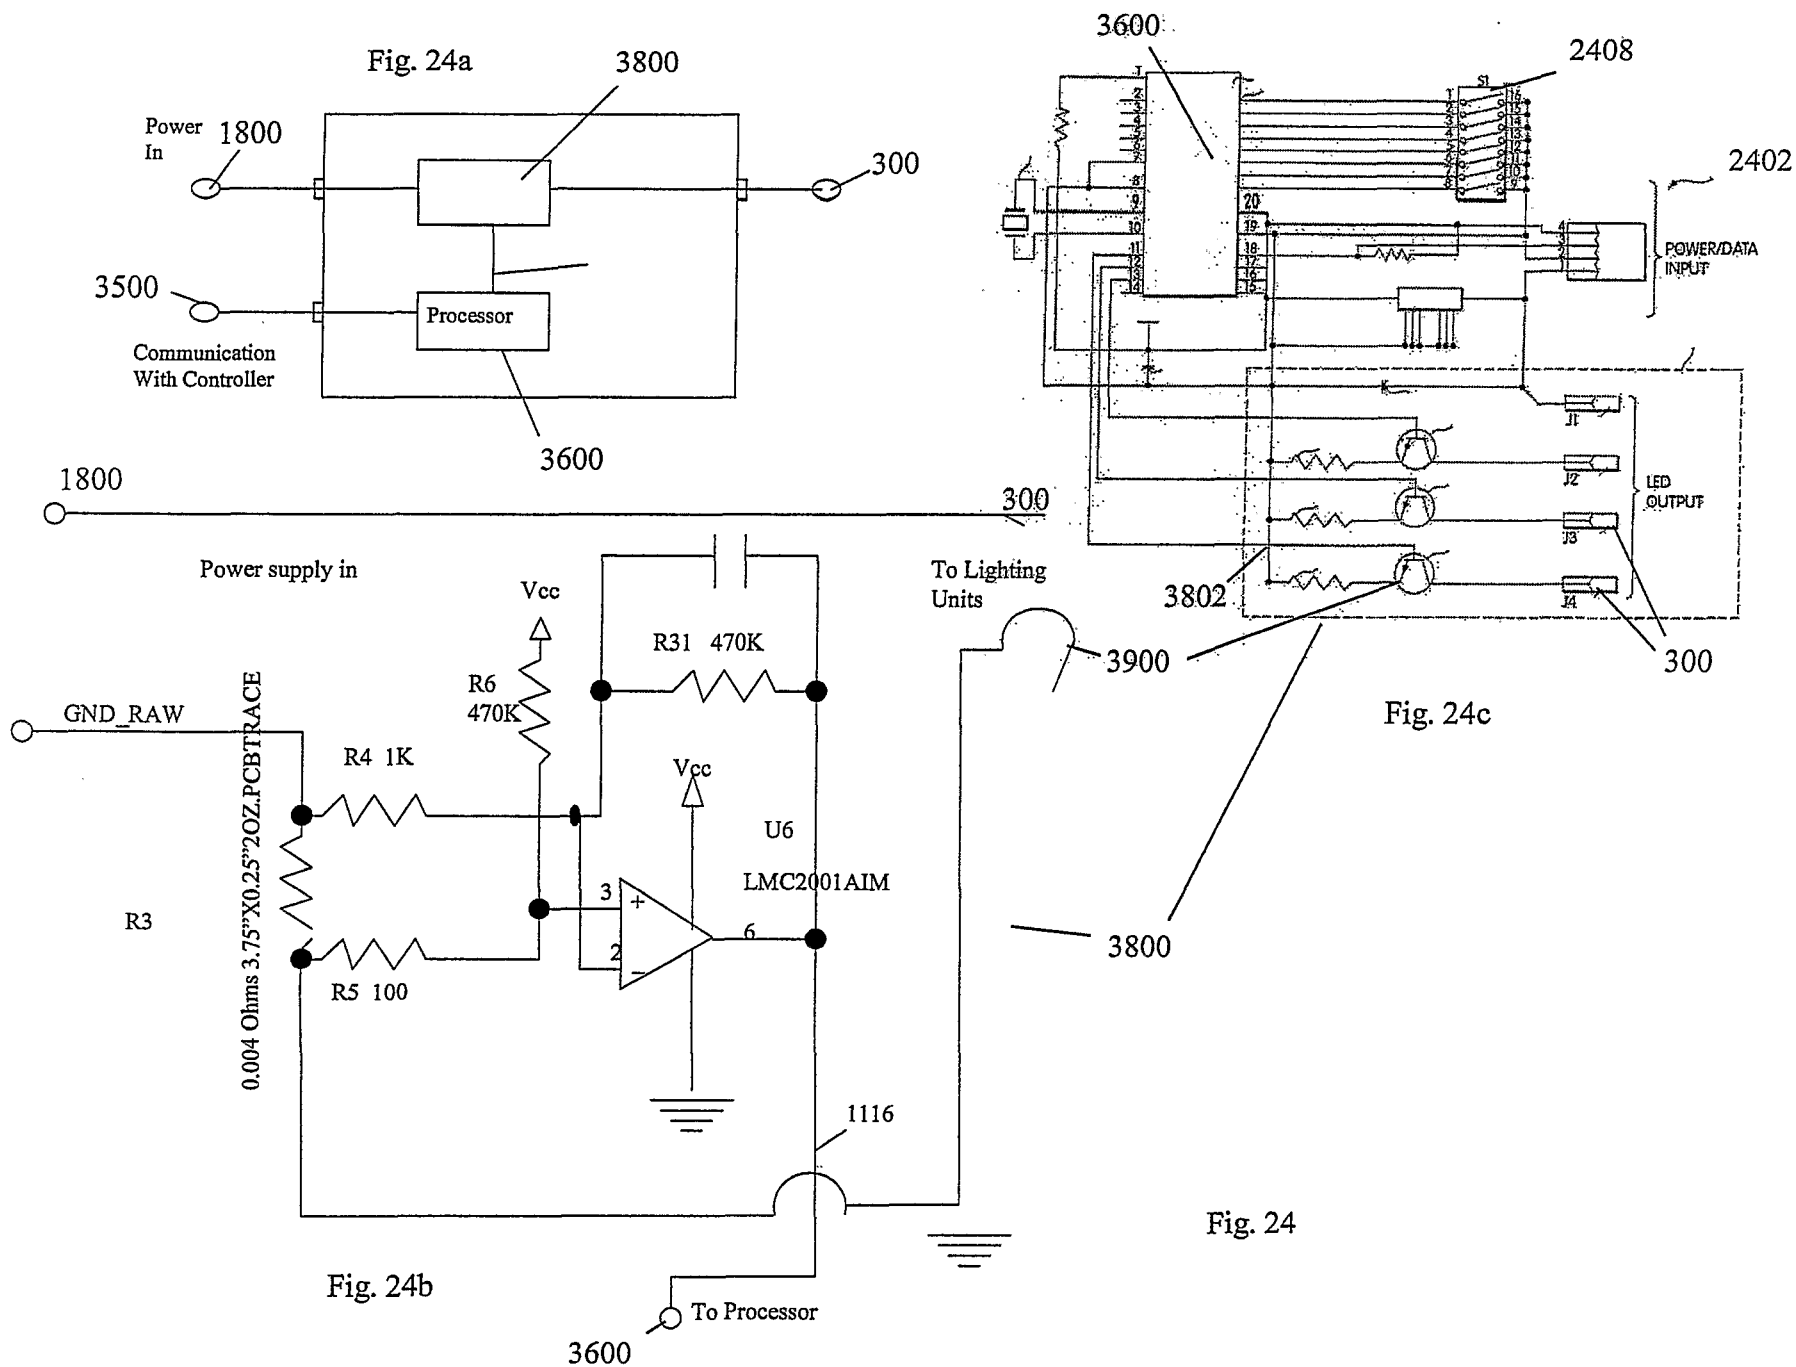
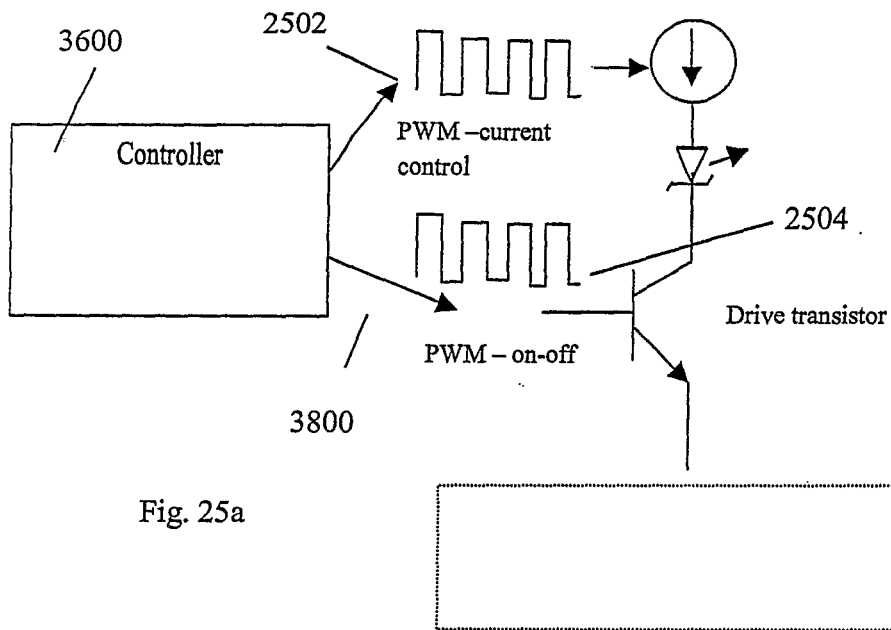
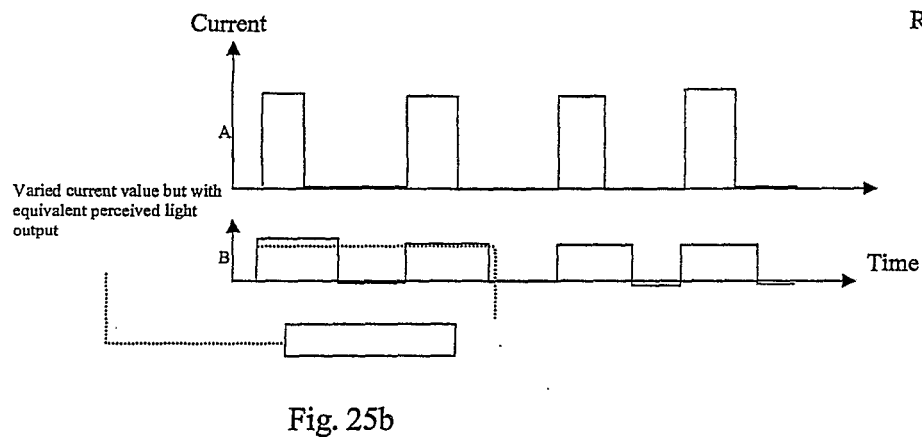
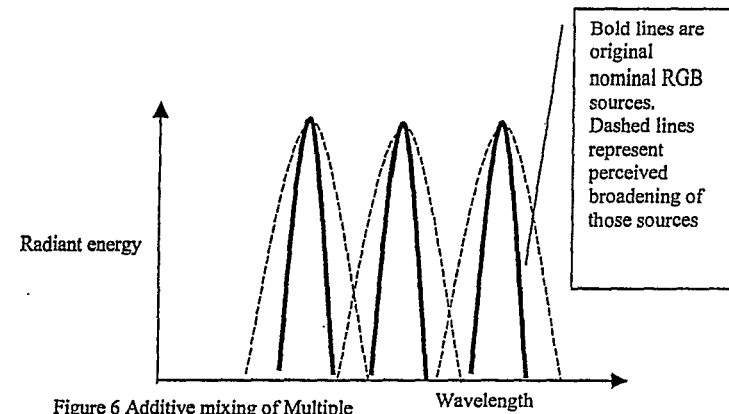
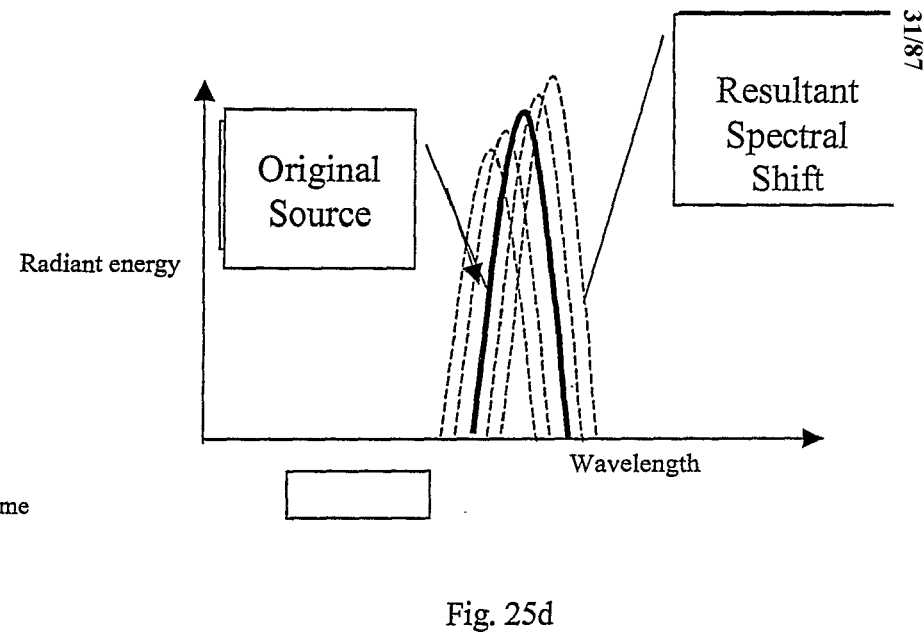


Fig. 24



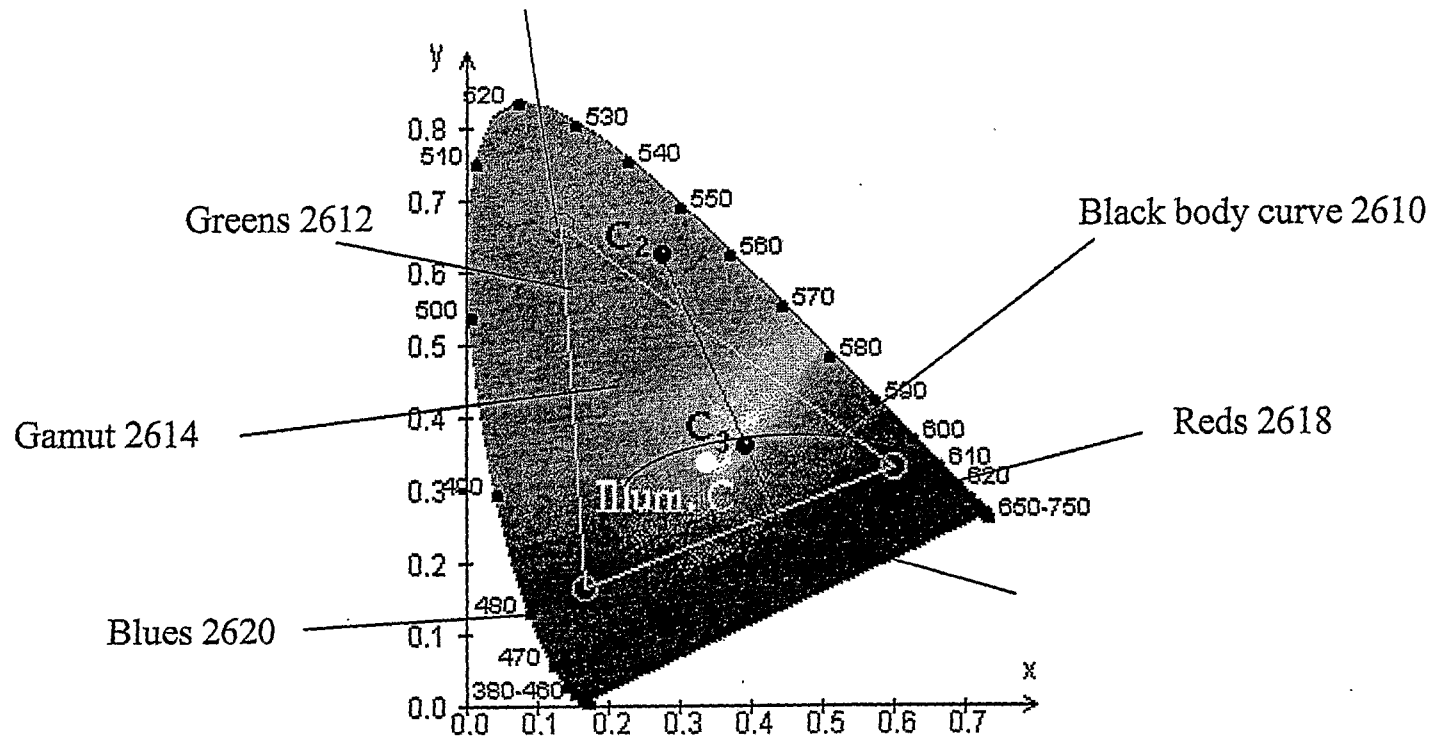
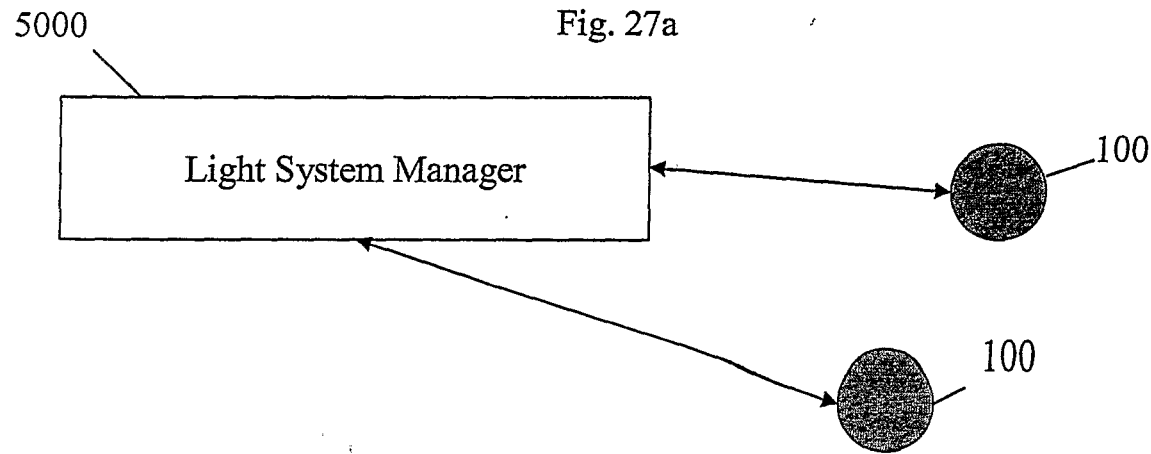
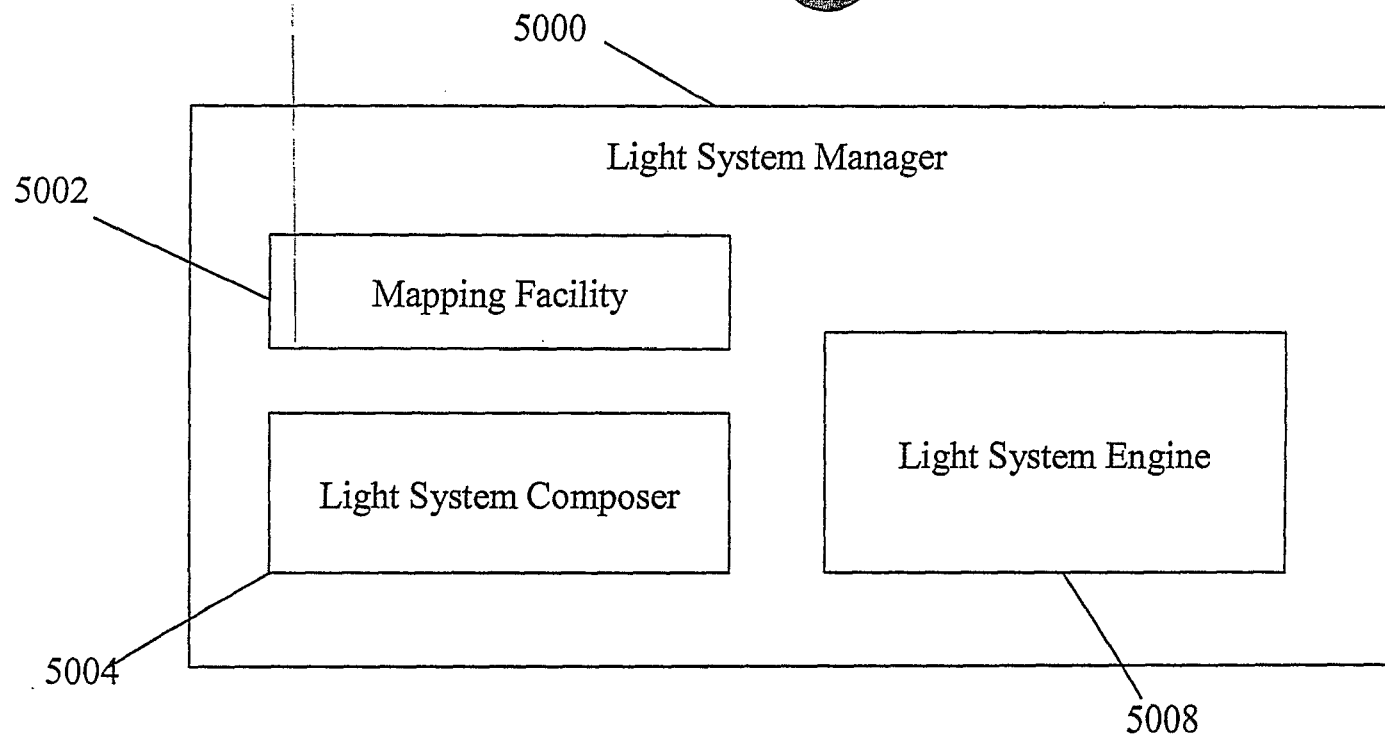


Fig. 26



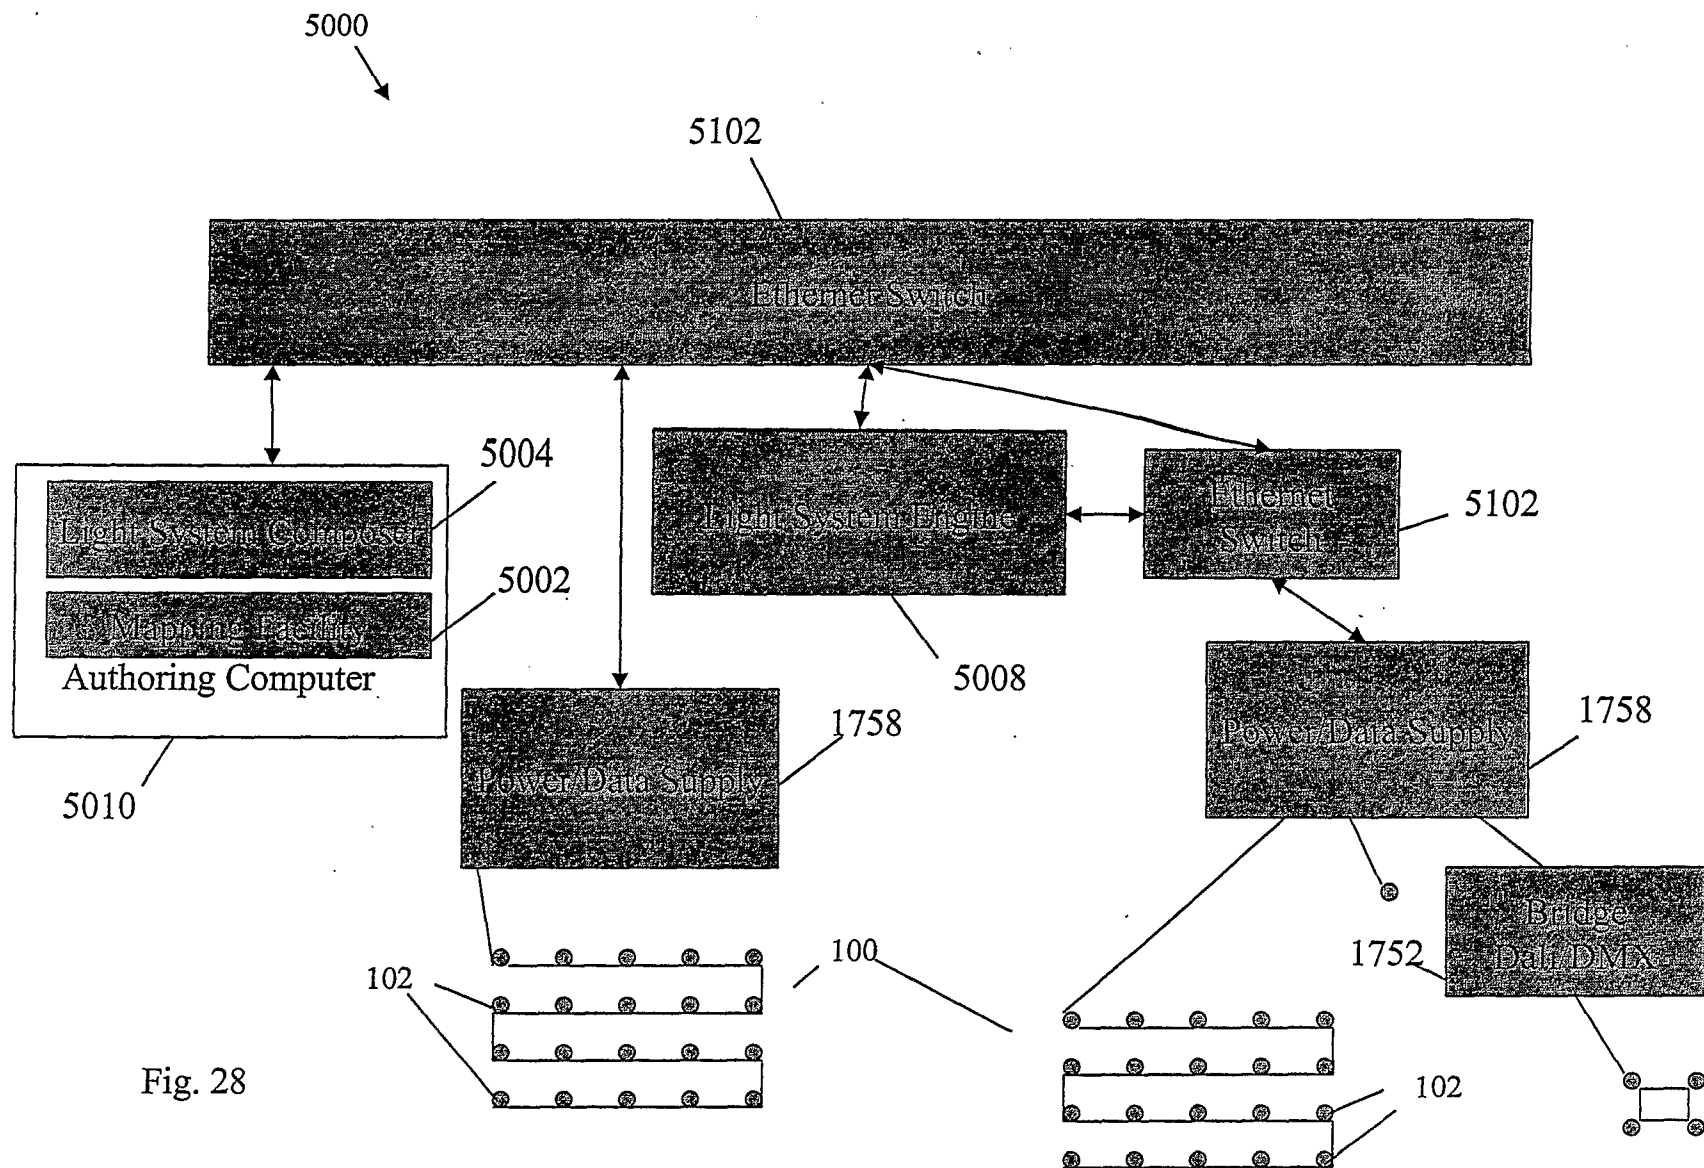


Fig. 28

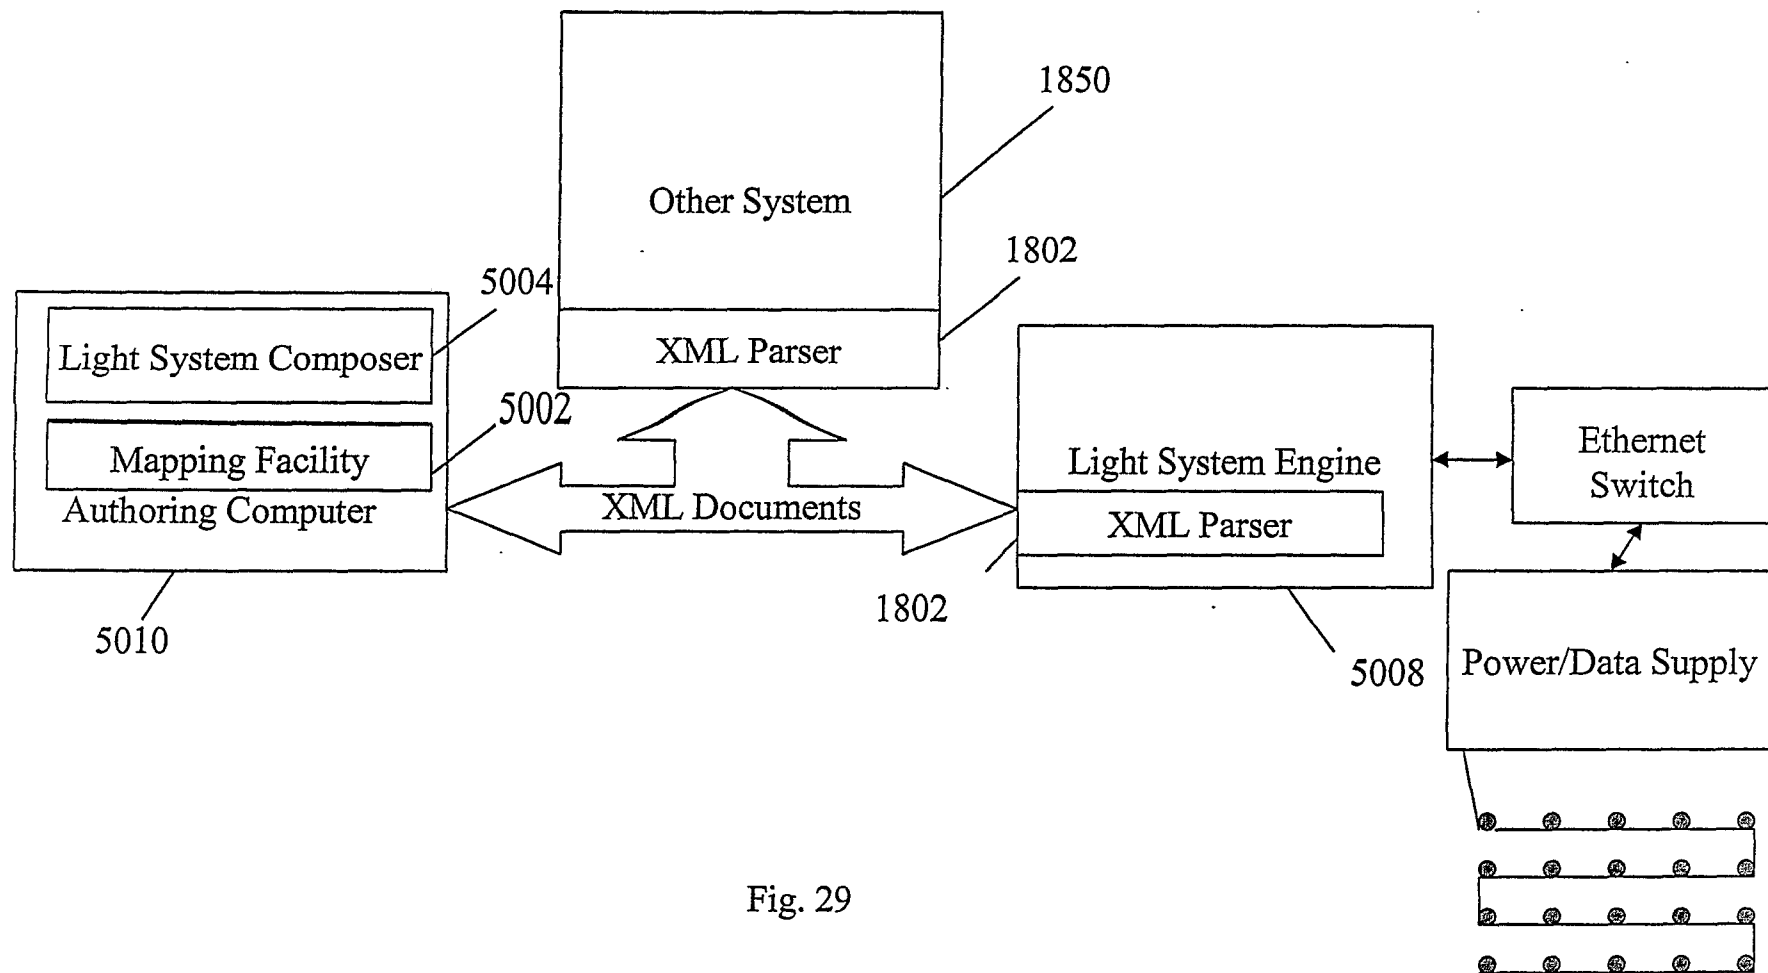


Fig. 29

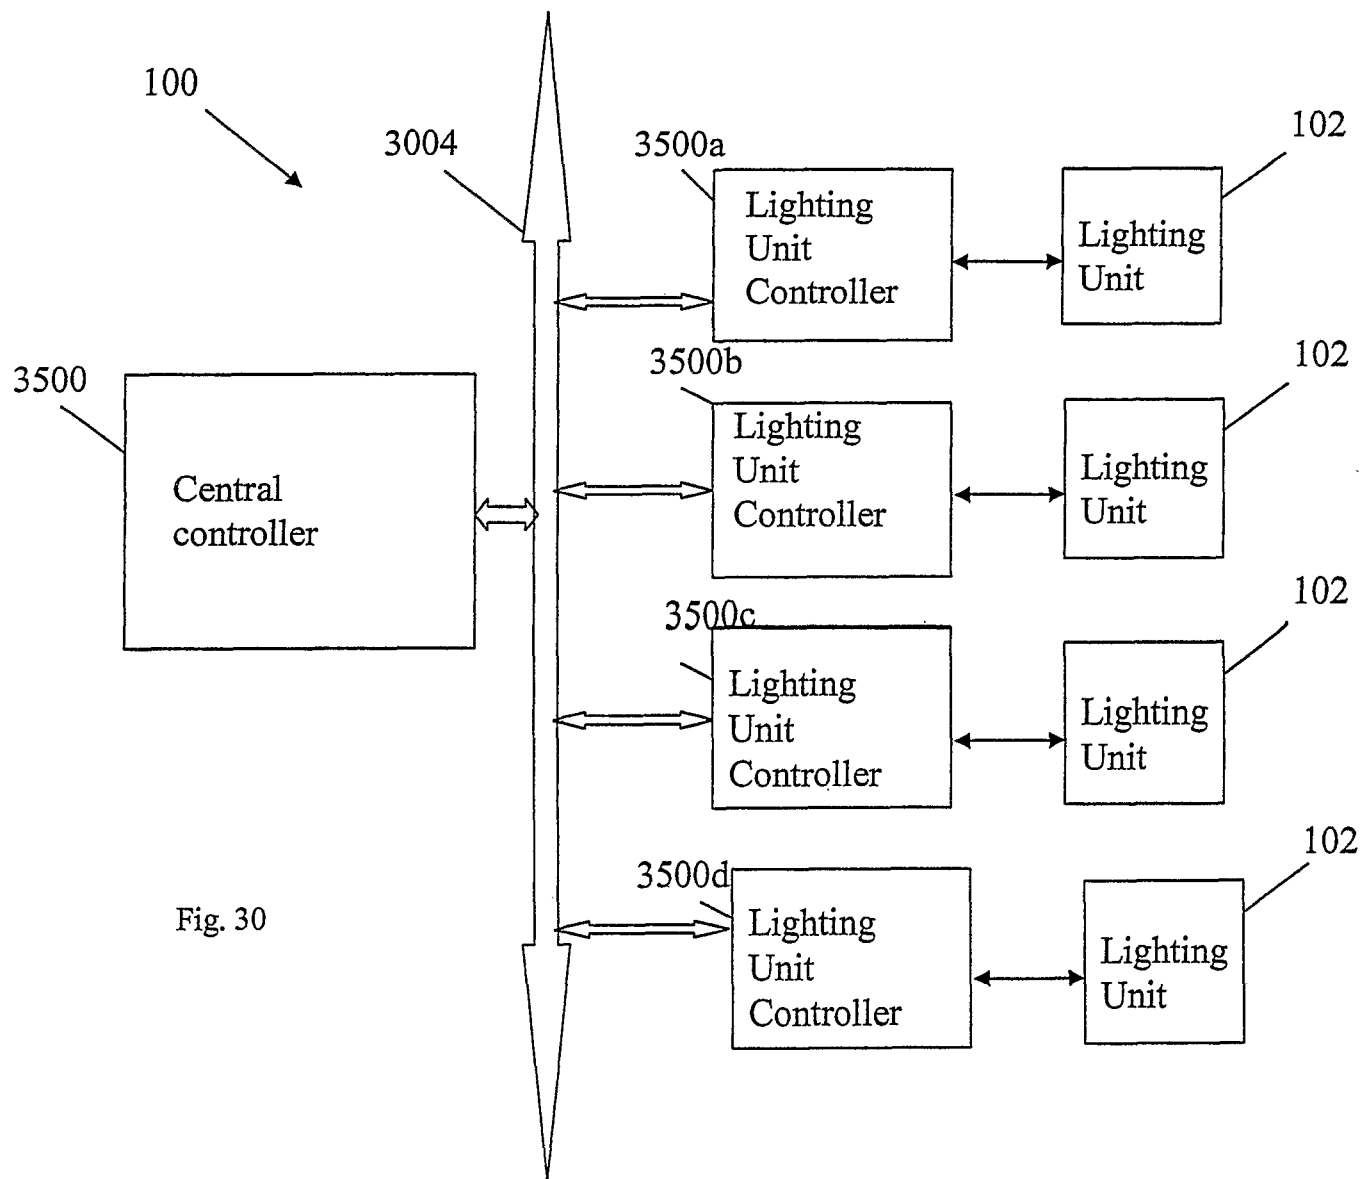
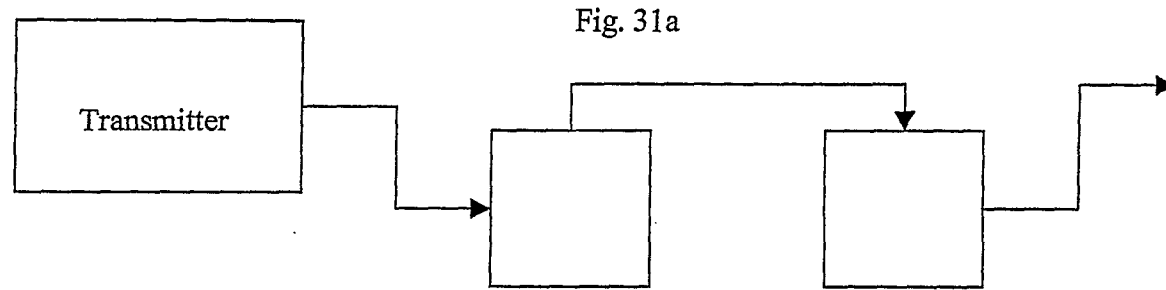
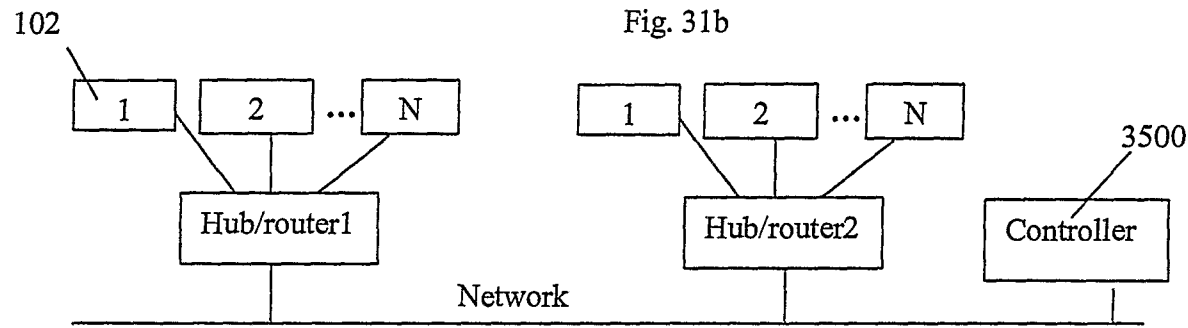
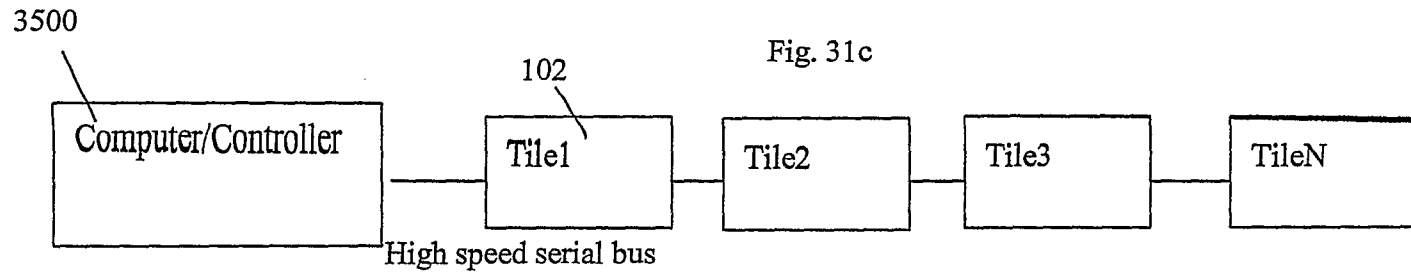


Fig. 30



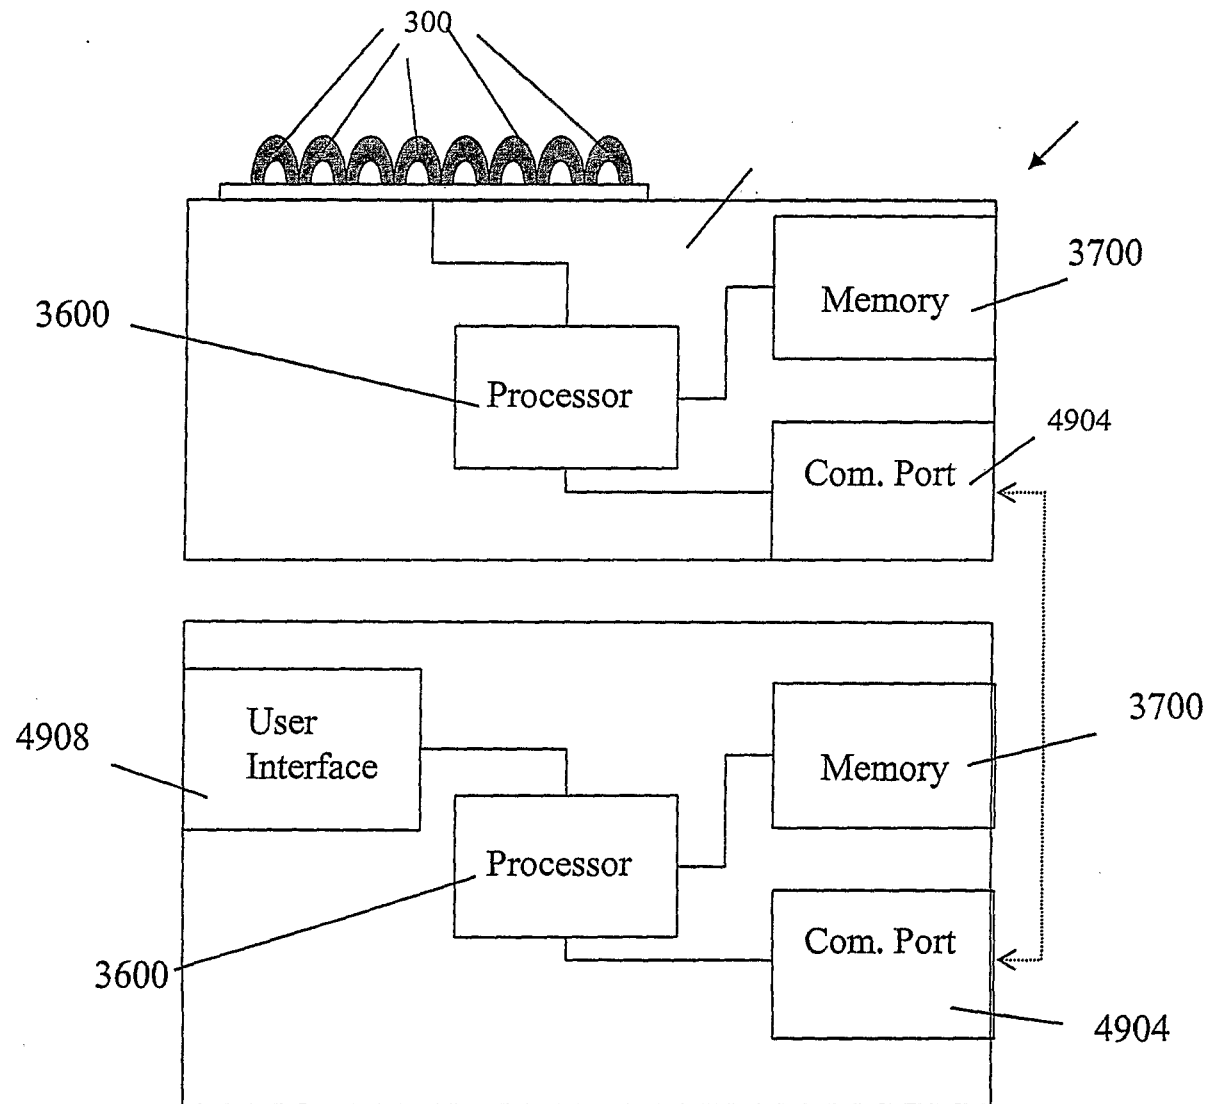


Fig. 32

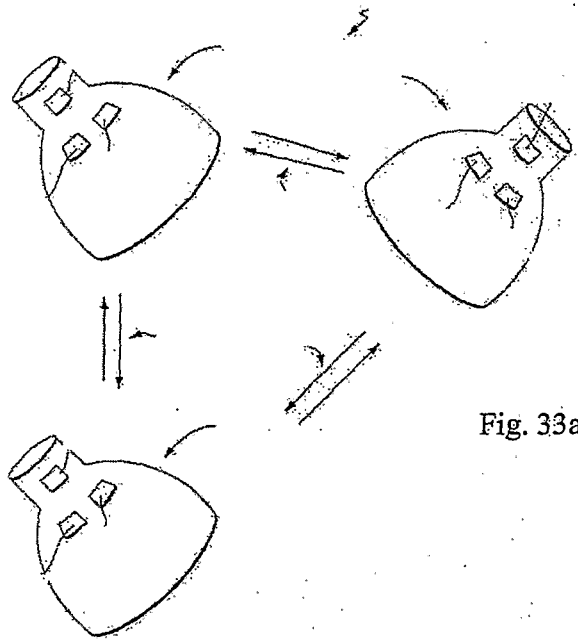


Fig. 33a

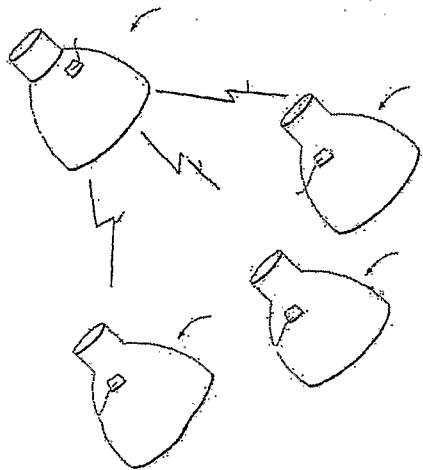


Fig. 33b

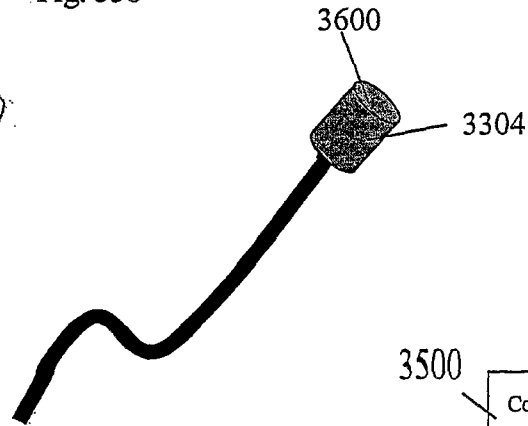


Fig. 33d

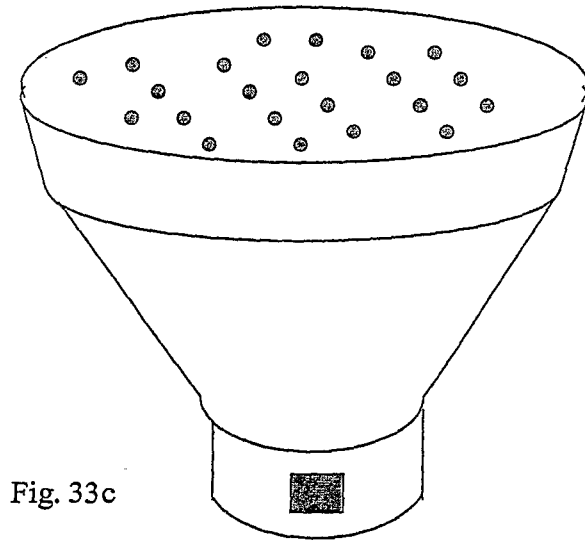


Fig. 33c

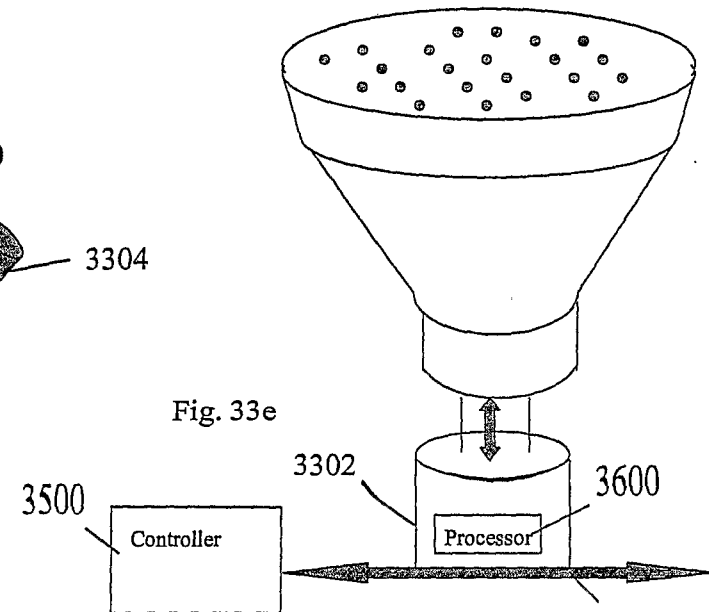
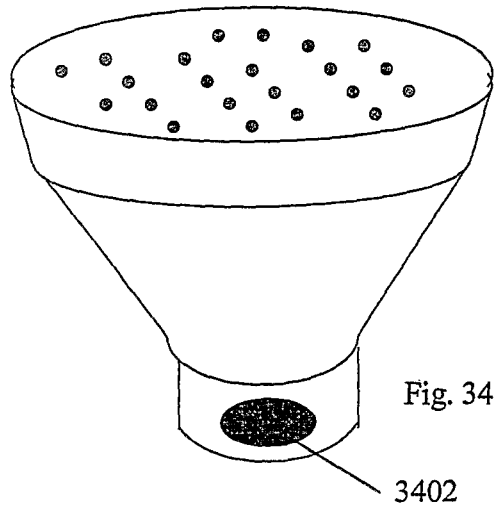
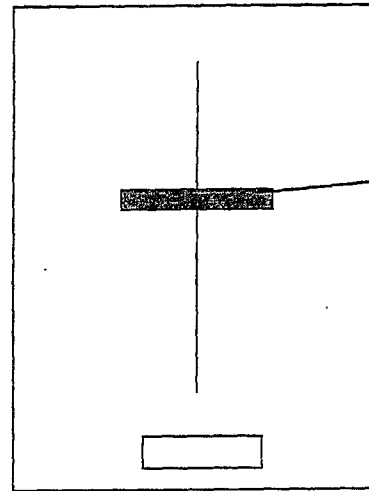
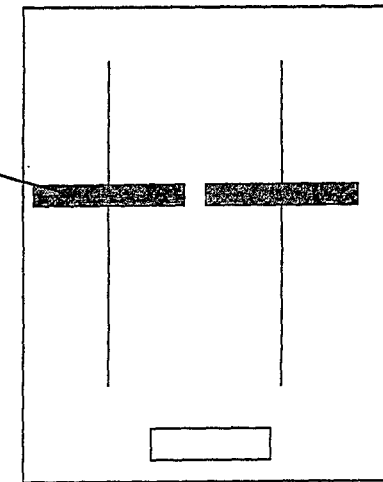
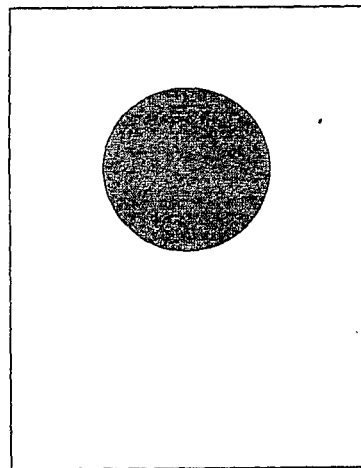
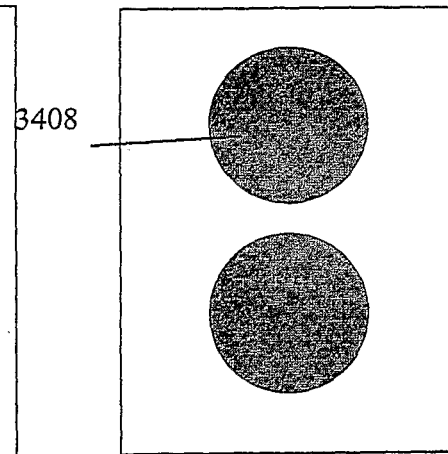
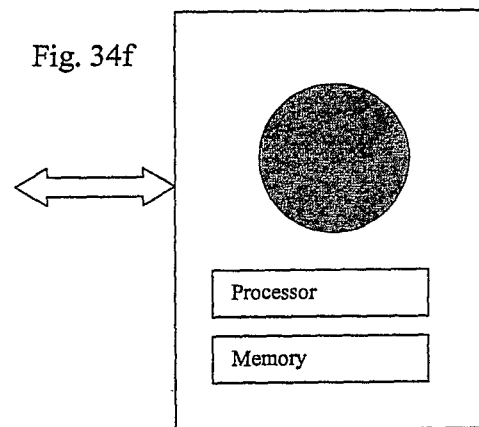

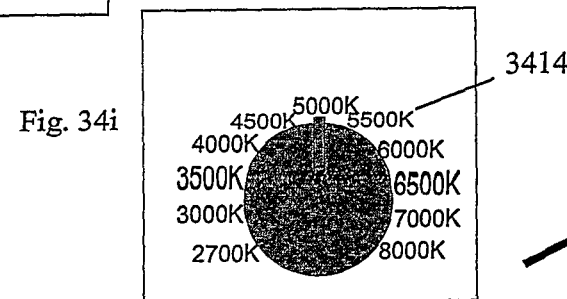
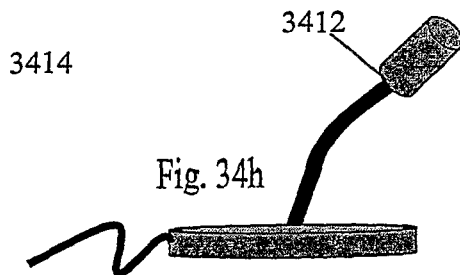
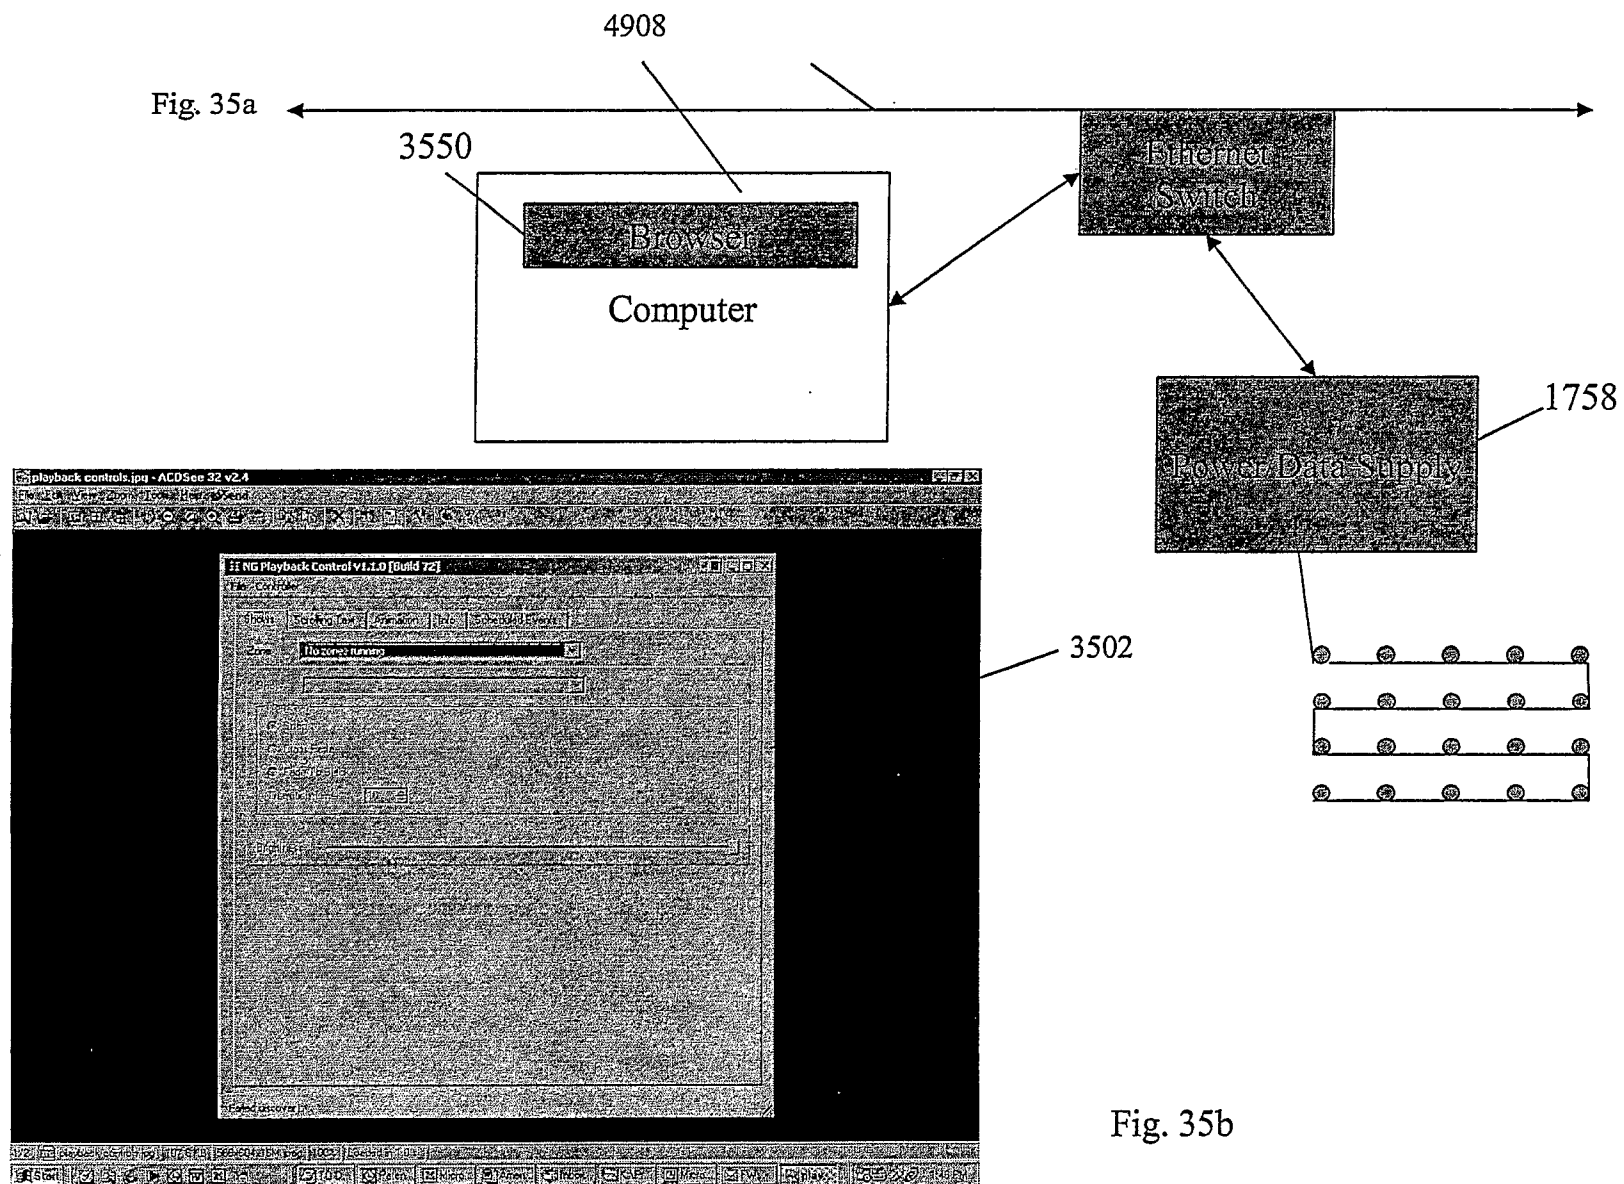


Fig. 33e





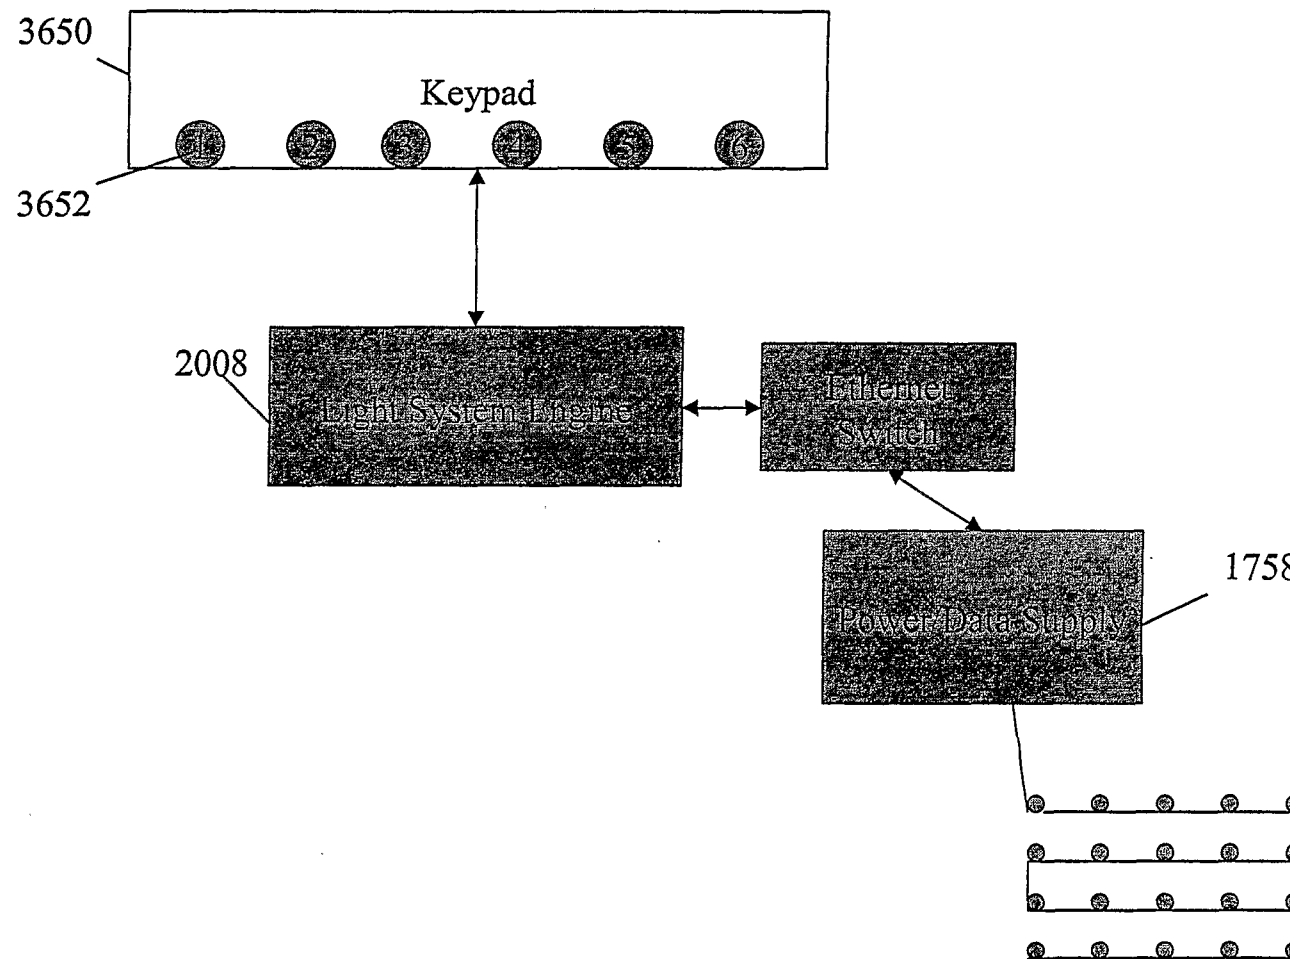


Fig. 36

3702 Light System	3704 Time	3708 Position	3710 Lit Position	3700 Color Range	3714 Intensity	3718 Other Sys.	3720 Position
LS001	T1	(1, 3, 7)	Poly001	0-16000	0-100		
LS001	T2	(1, 3, 7)	Poly001	0-16000			
LS001	T3	(1, 3, 7)	Poly 002	0-16000			
LS002	T1	(0,0,0)	Poly 003	0-16000			
LS002	T2	(0,0,0)	Poly004	0-16000			
LS002	T3	(0,0,0)	Poly 005	0-16000			
LS00N	TN						

Fig. 37

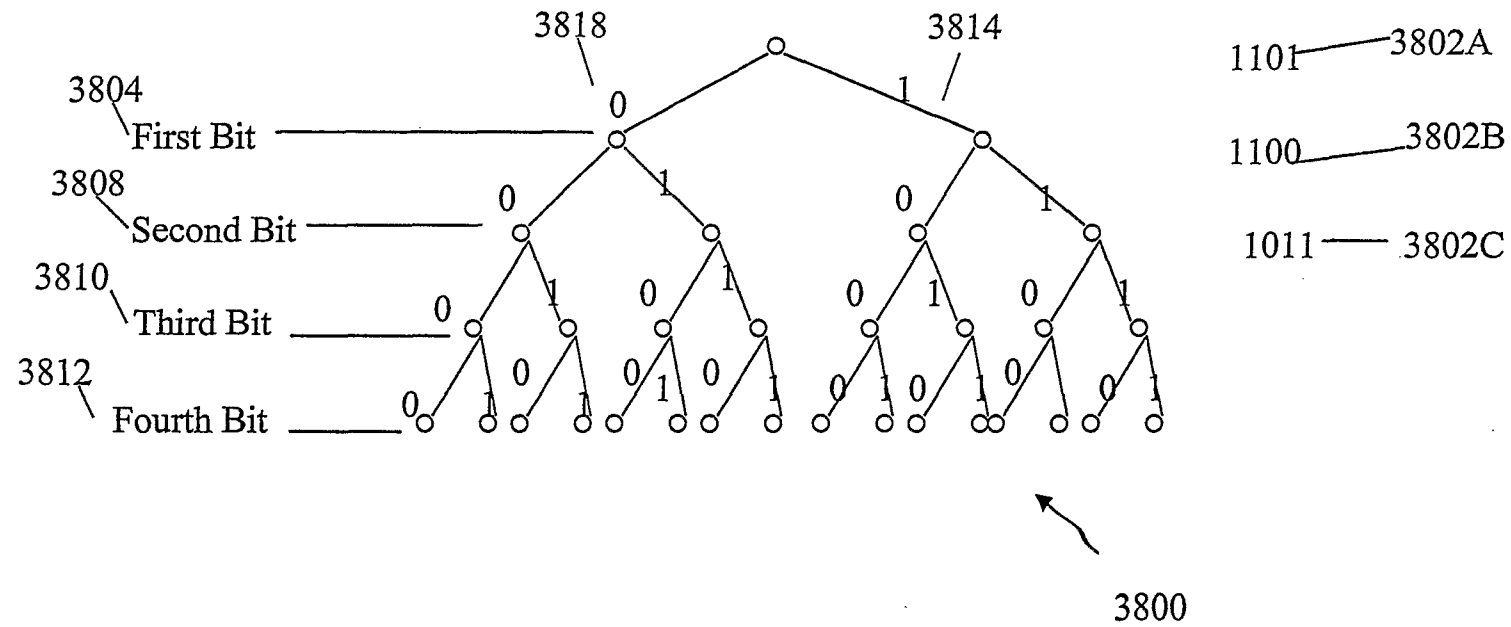


Fig. 38

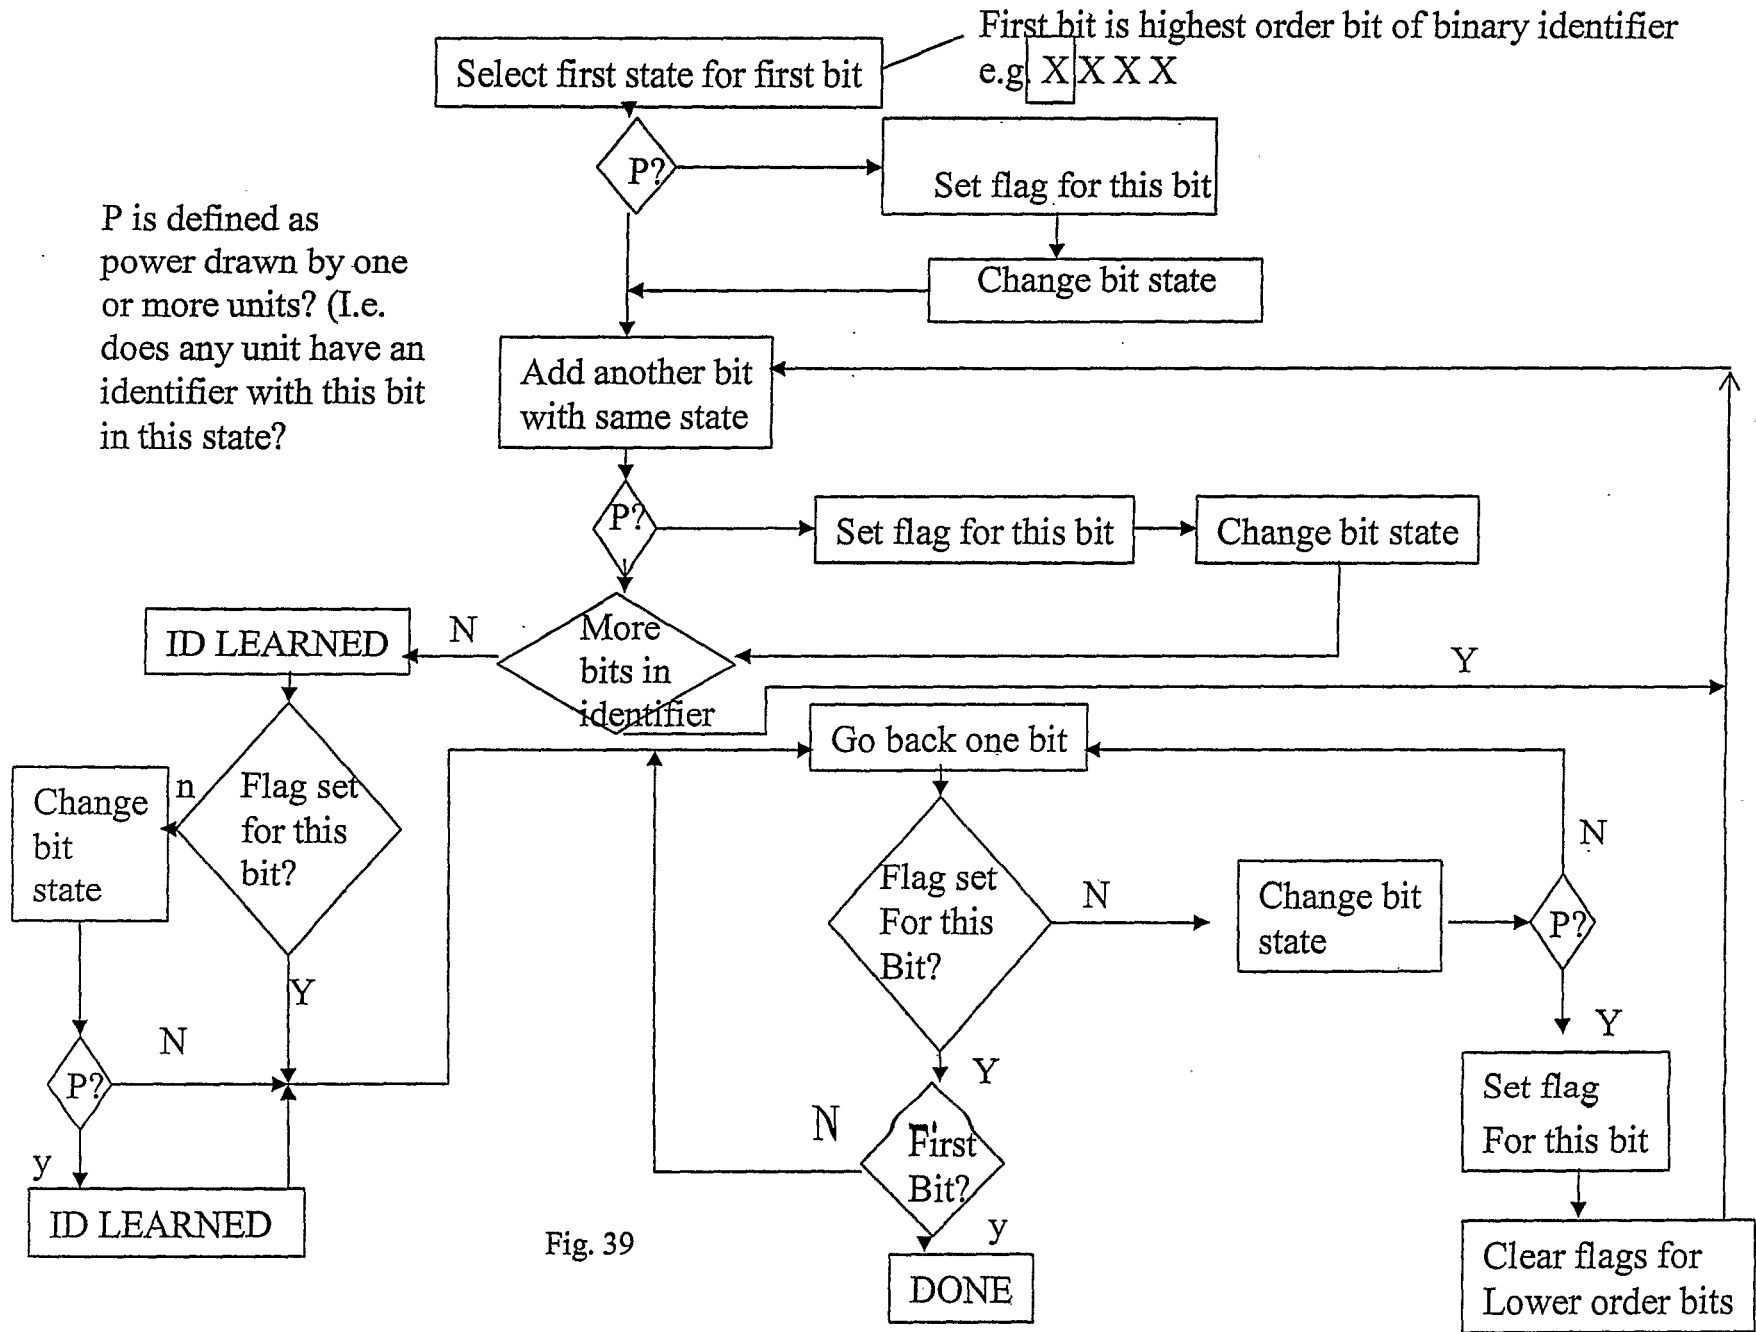


Fig. 39

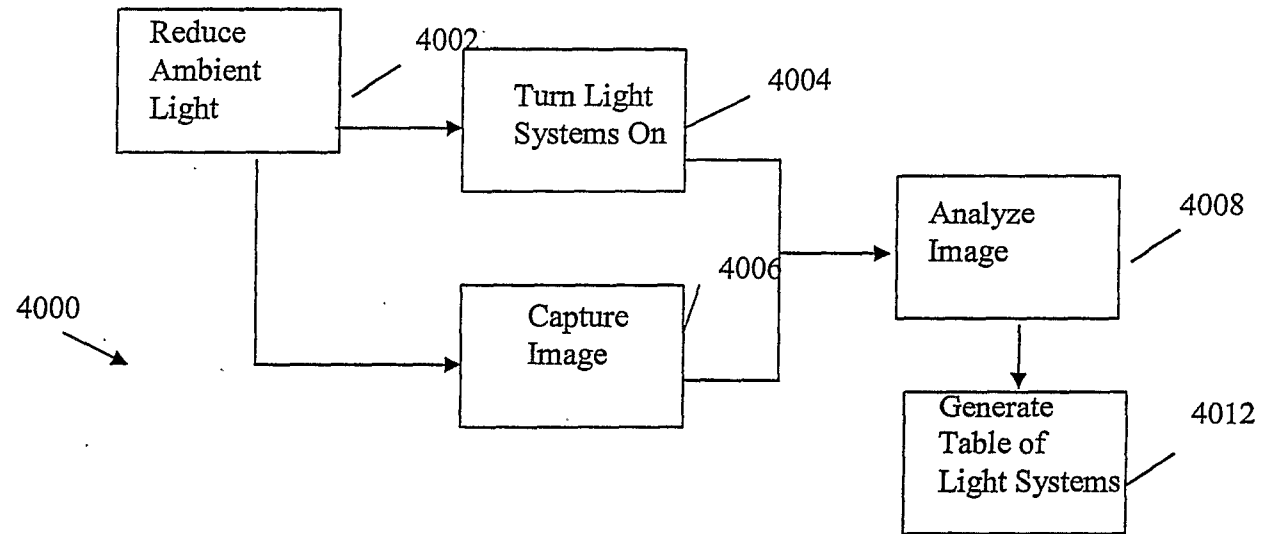


Fig. 40

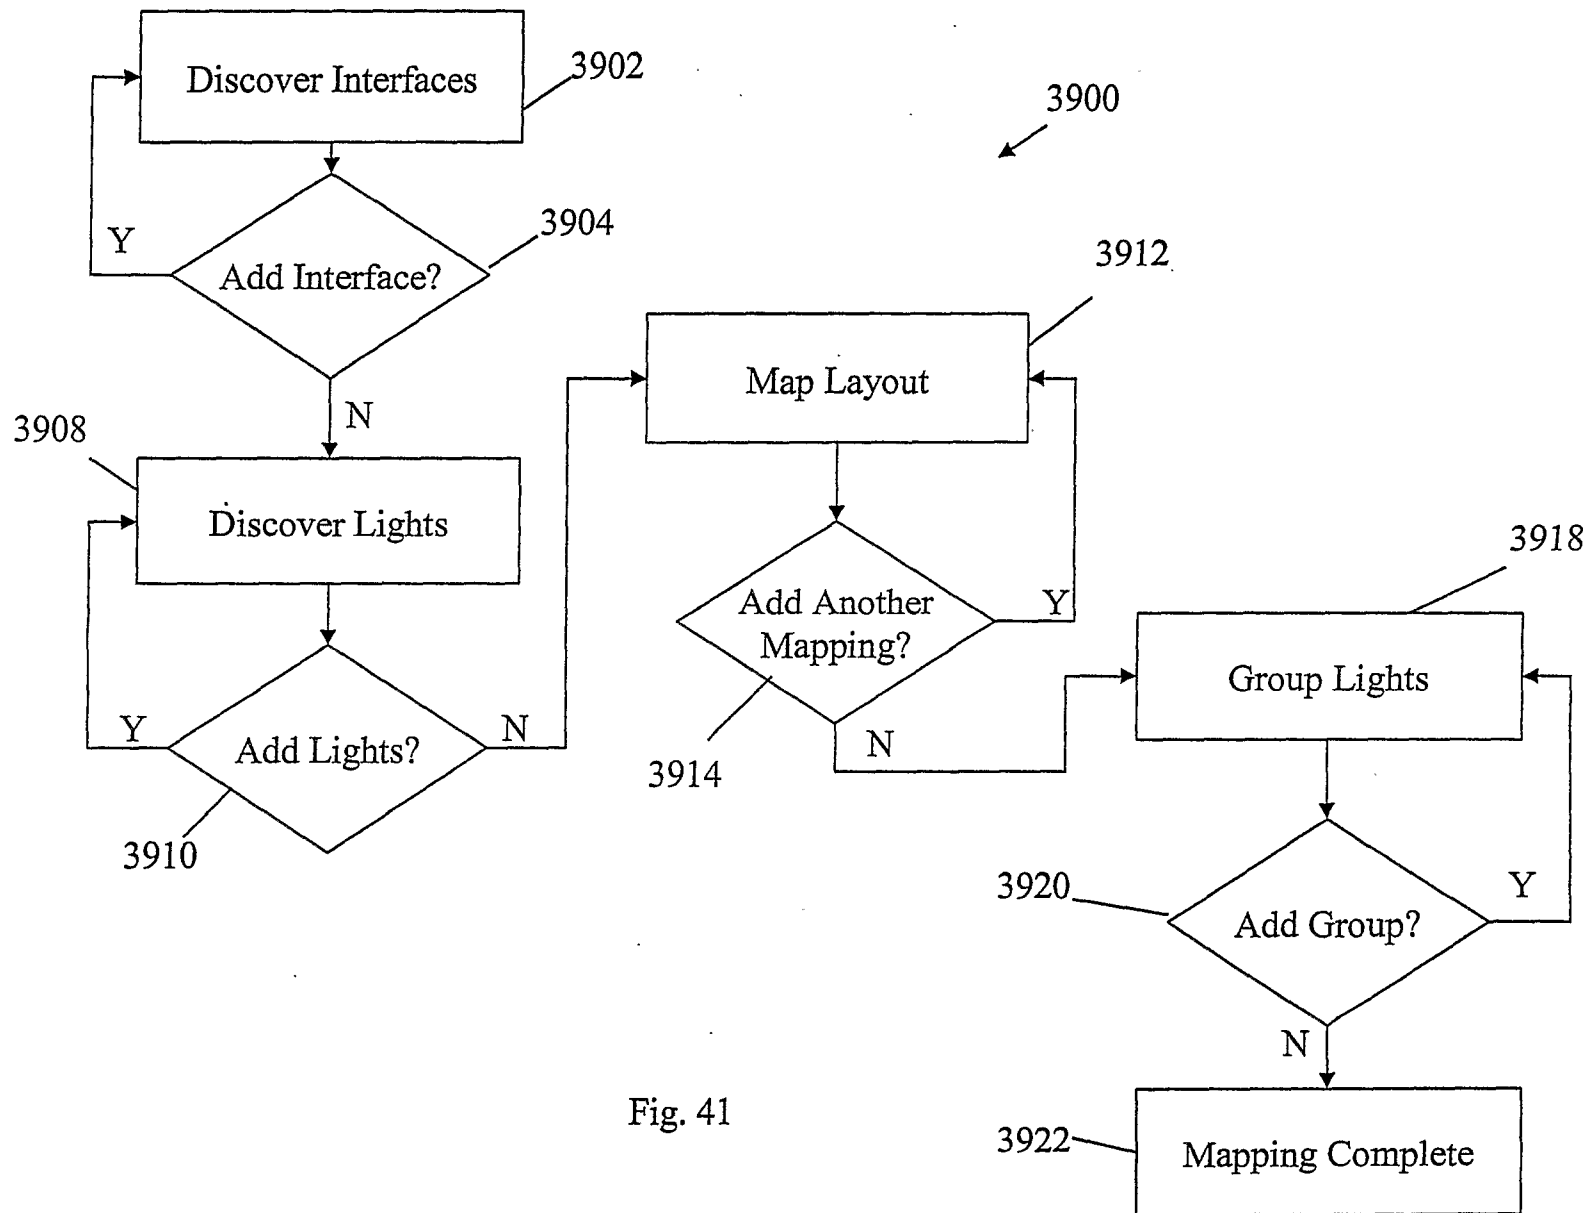
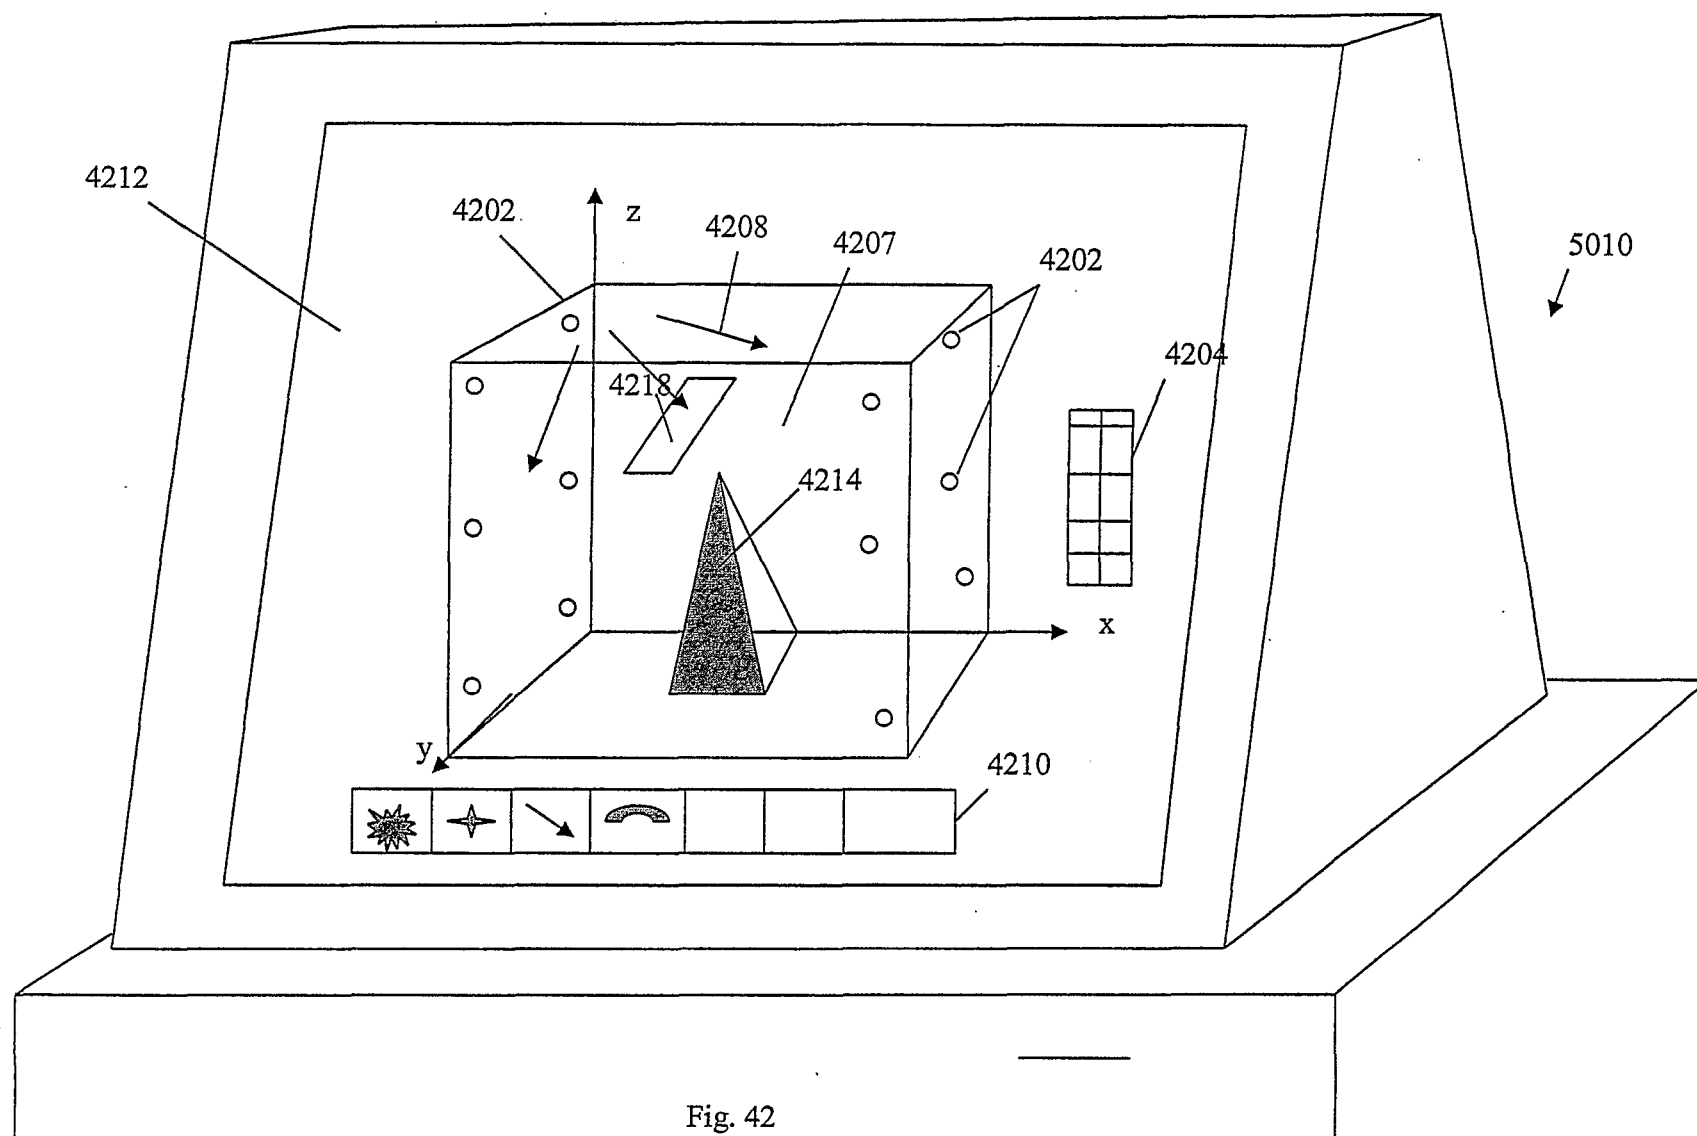


Fig. 41



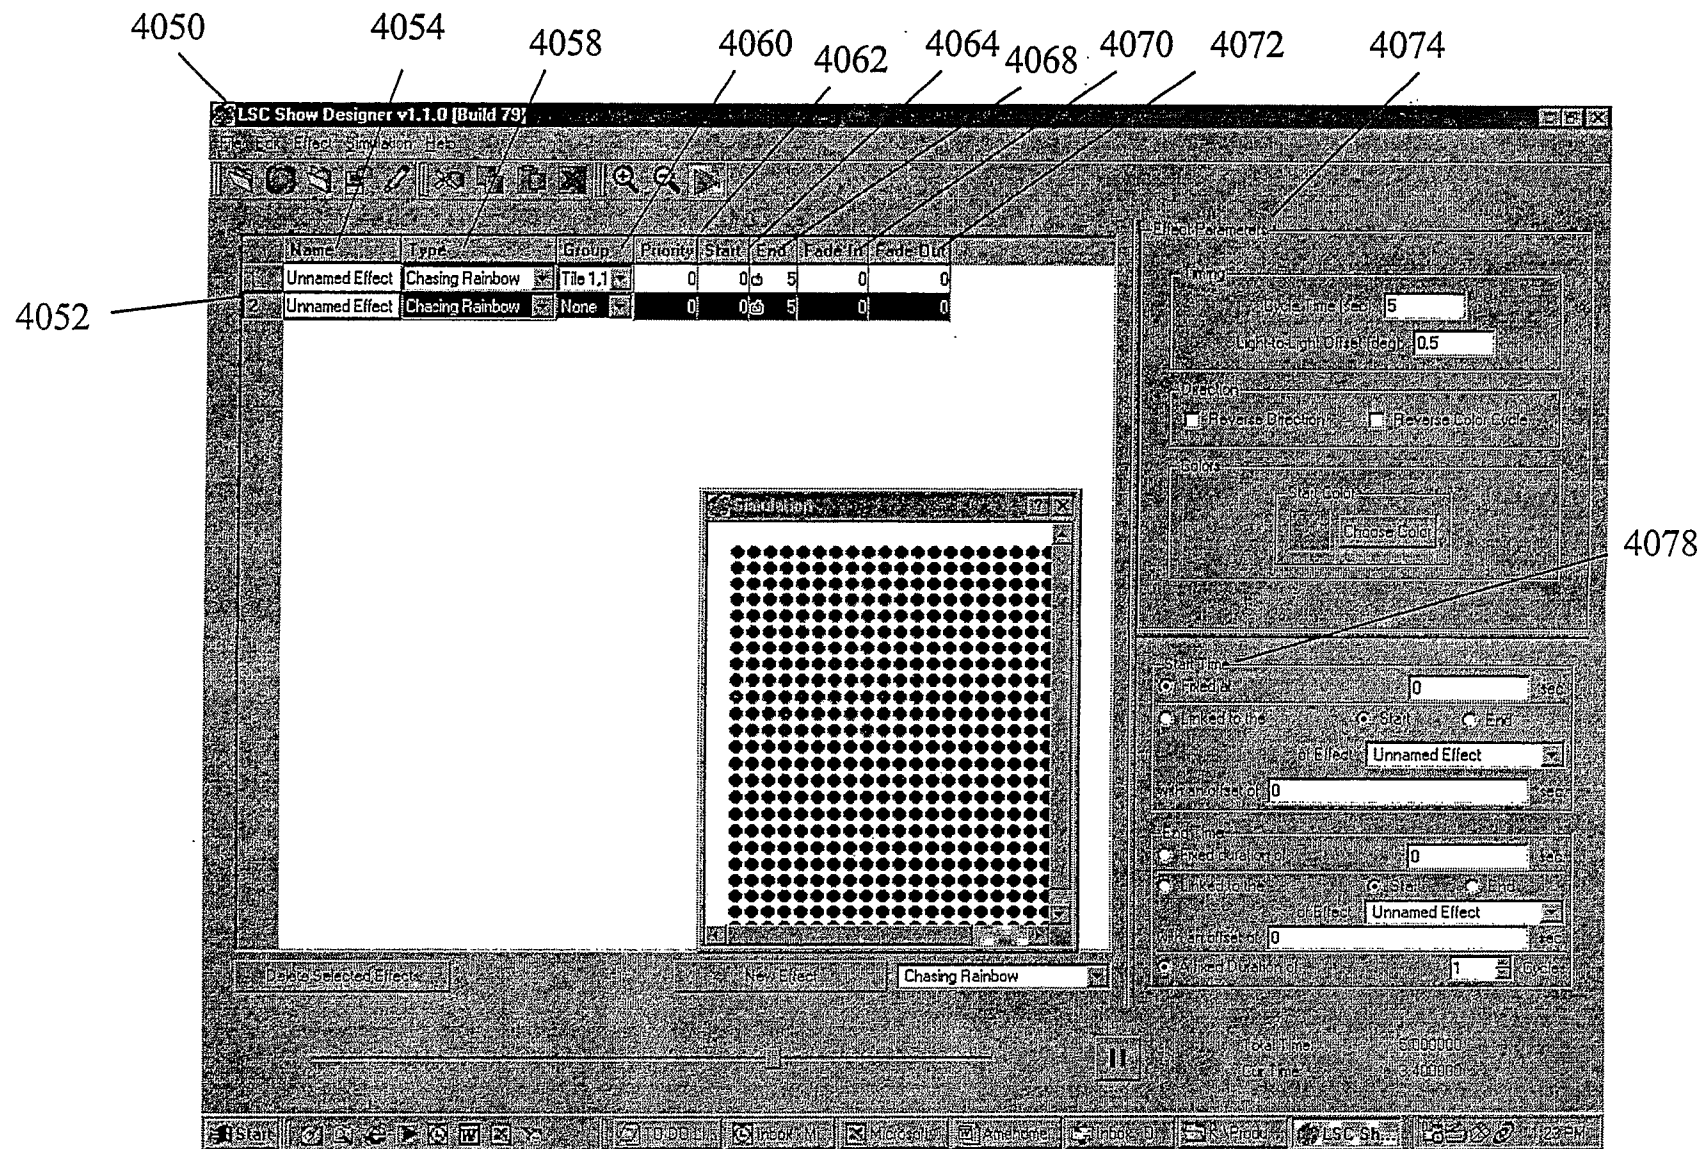


Fig. 43

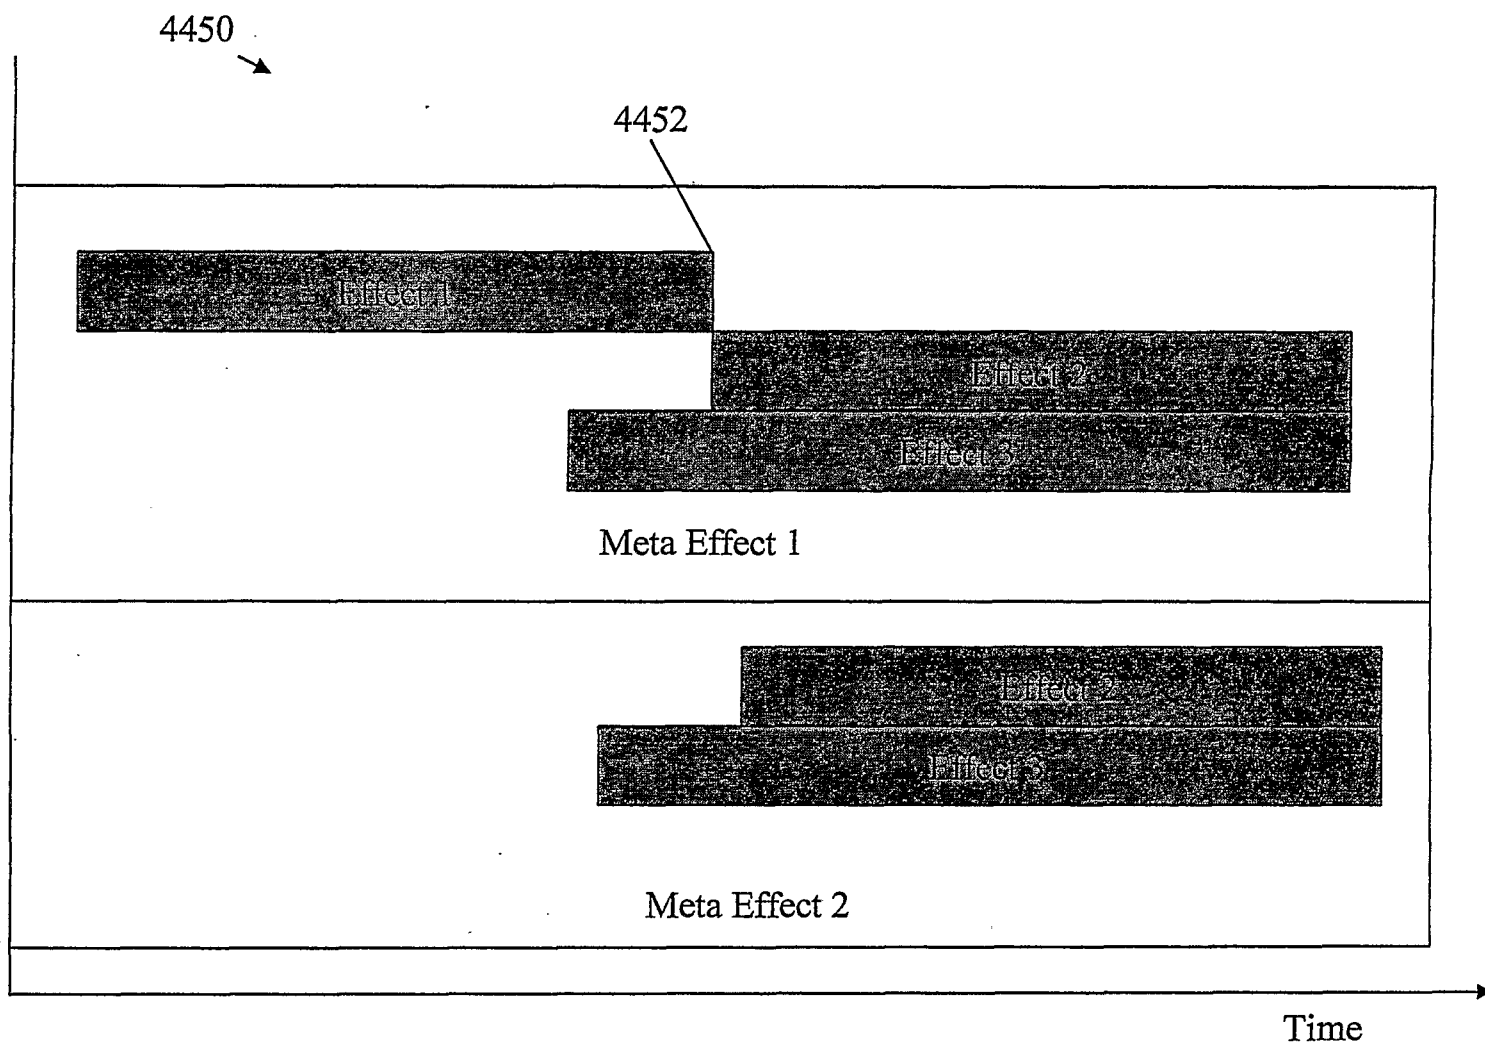


Fig. 44

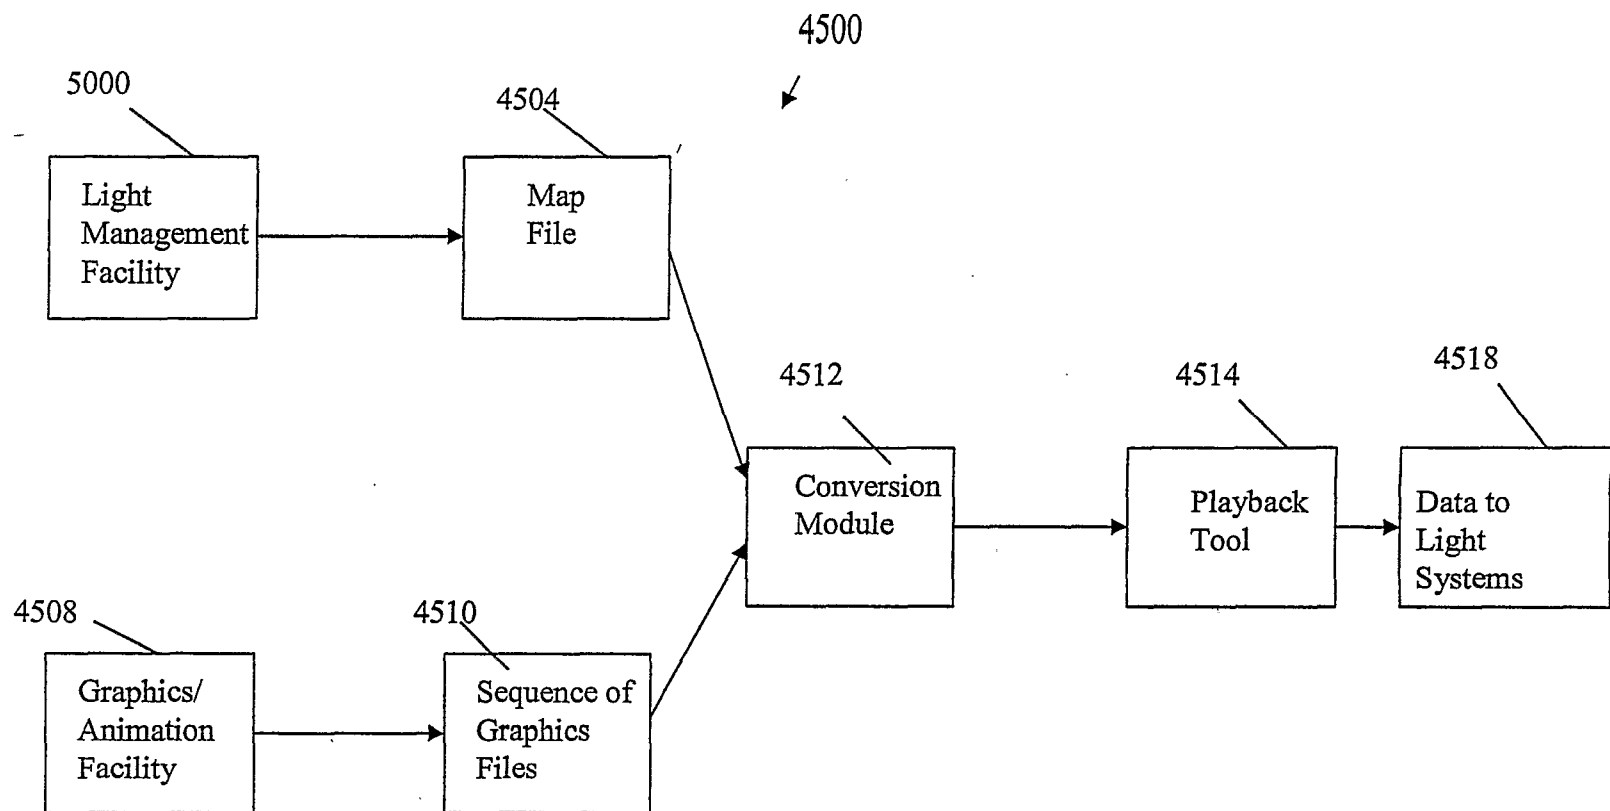


Fig. 45

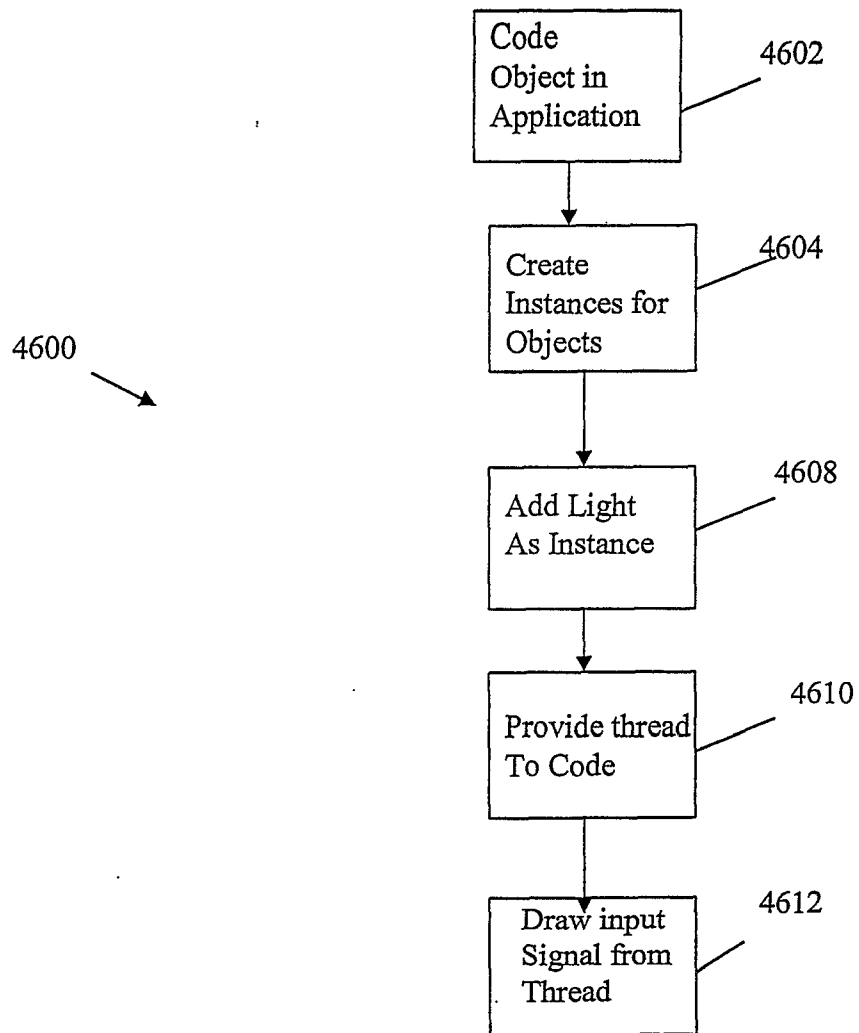


Fig. 46



Fig. 47

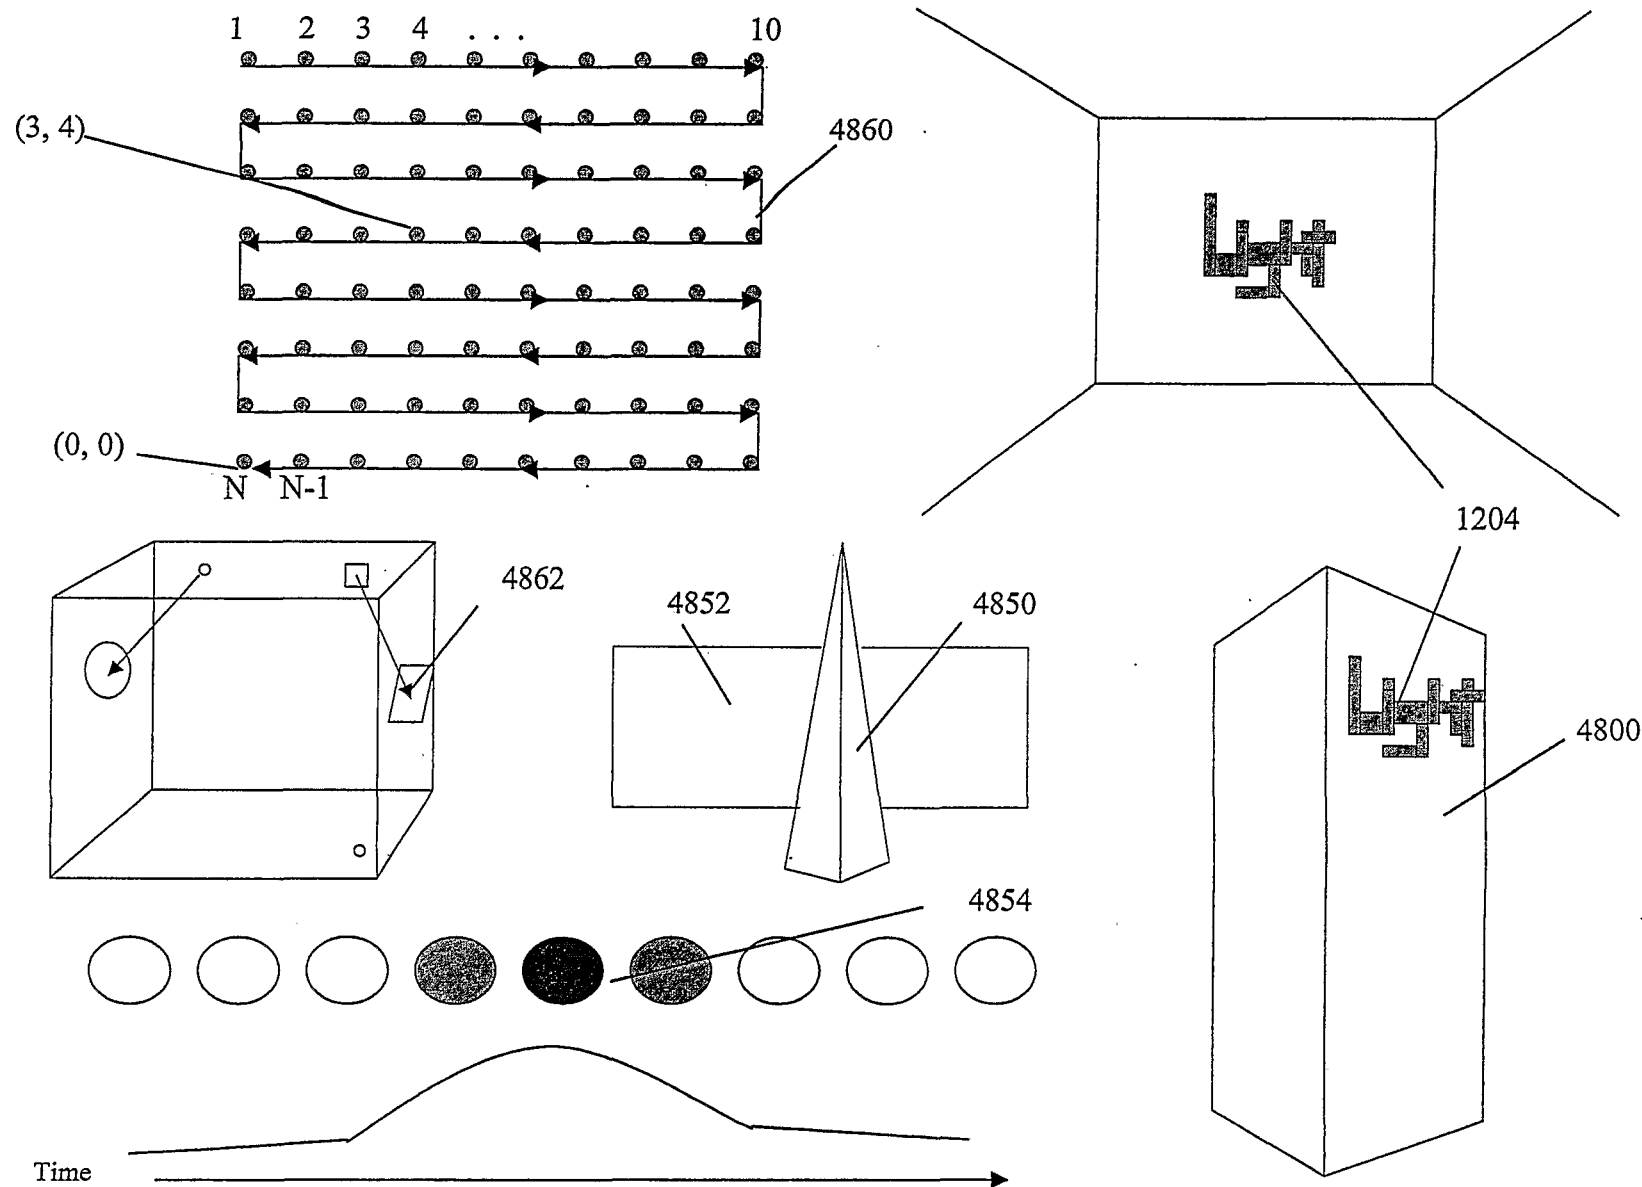


Fig.48

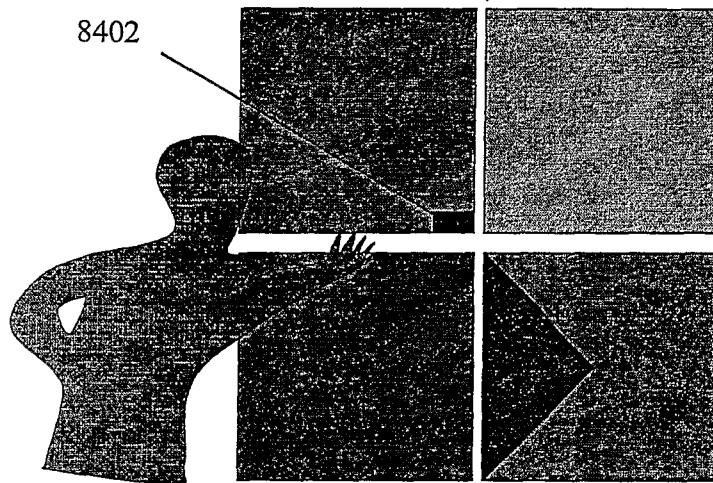
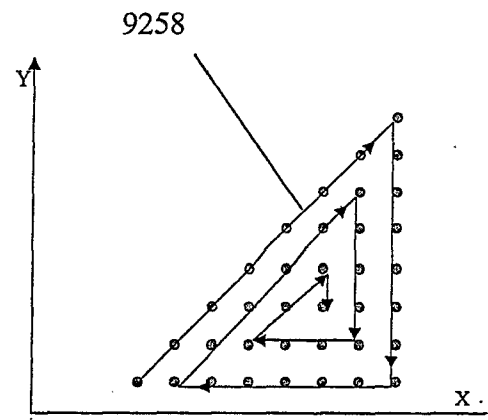
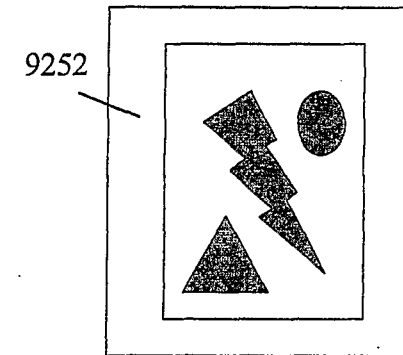
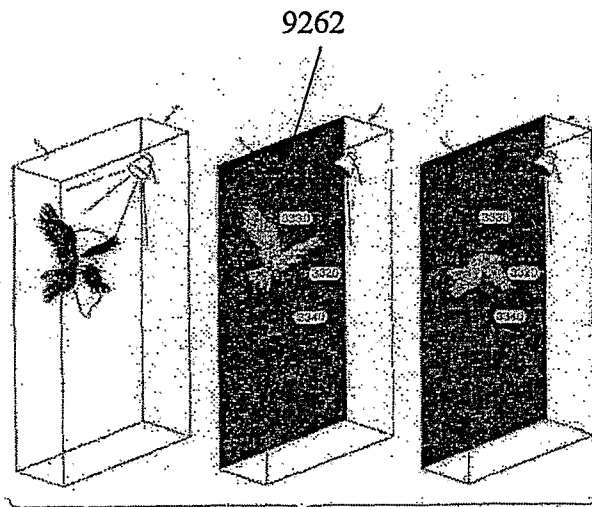
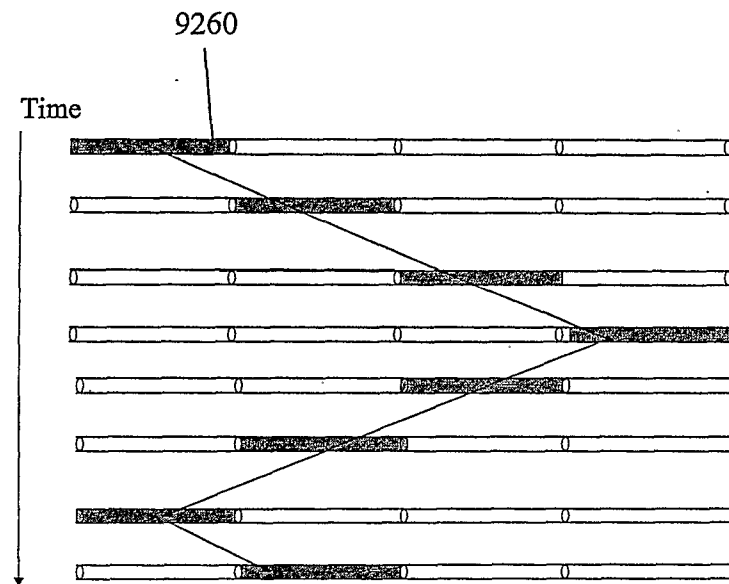


Fig. 49



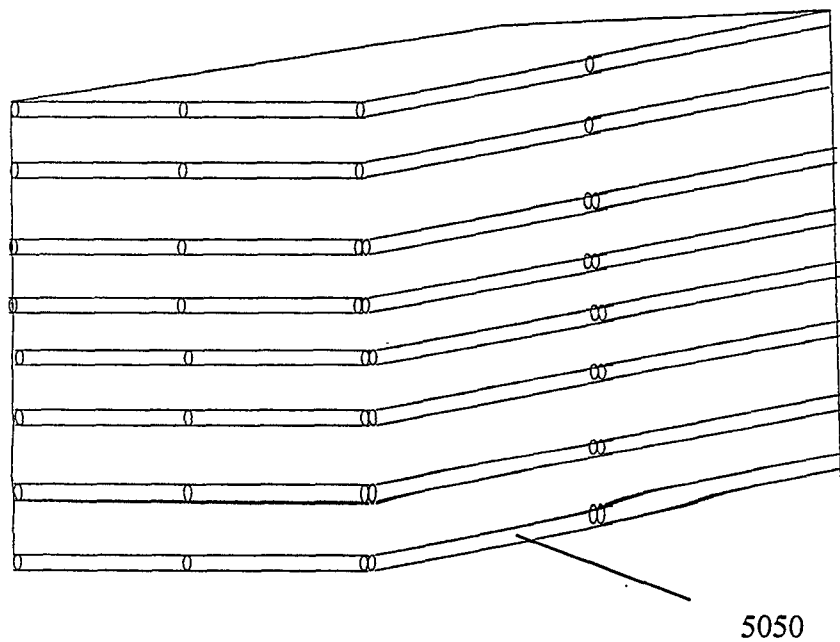
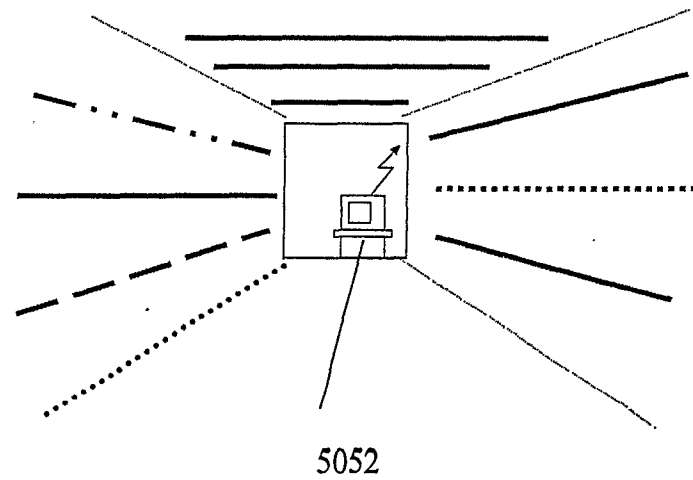


Fig. 50



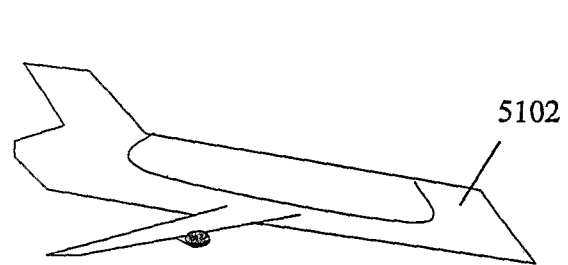
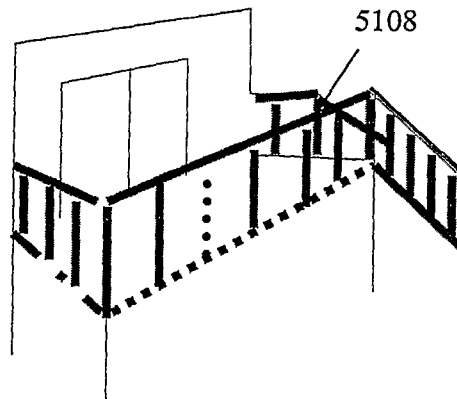
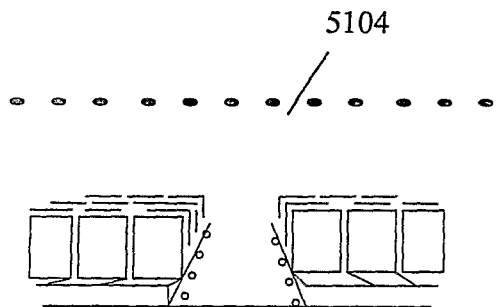
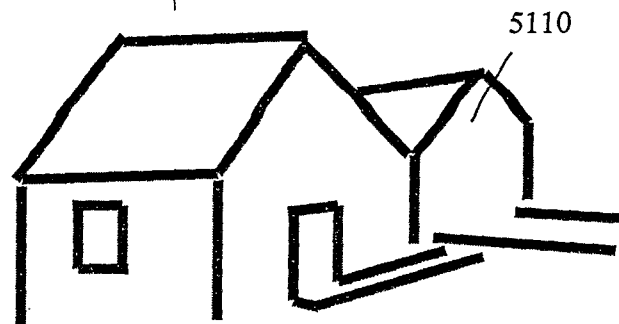
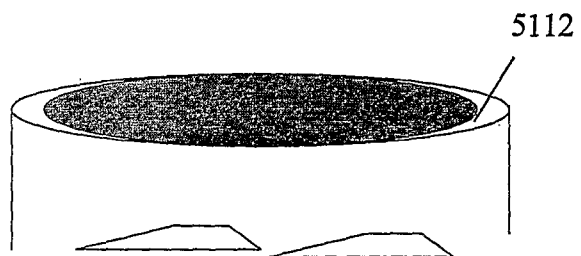
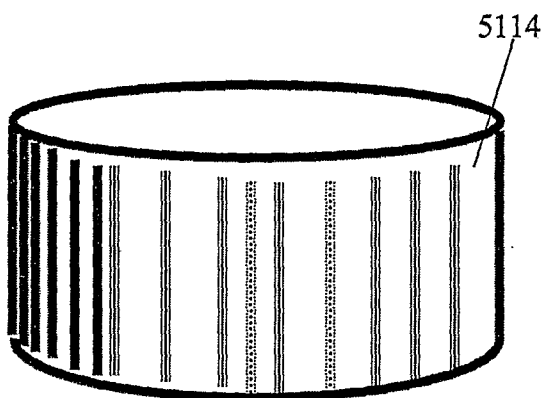
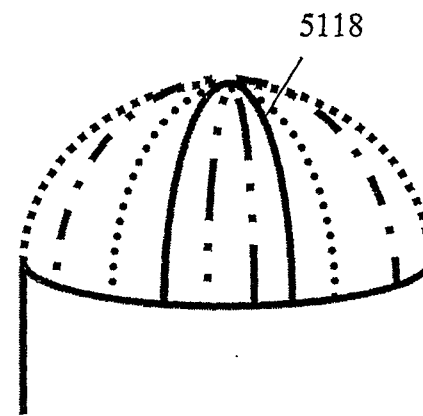


Fig. 51

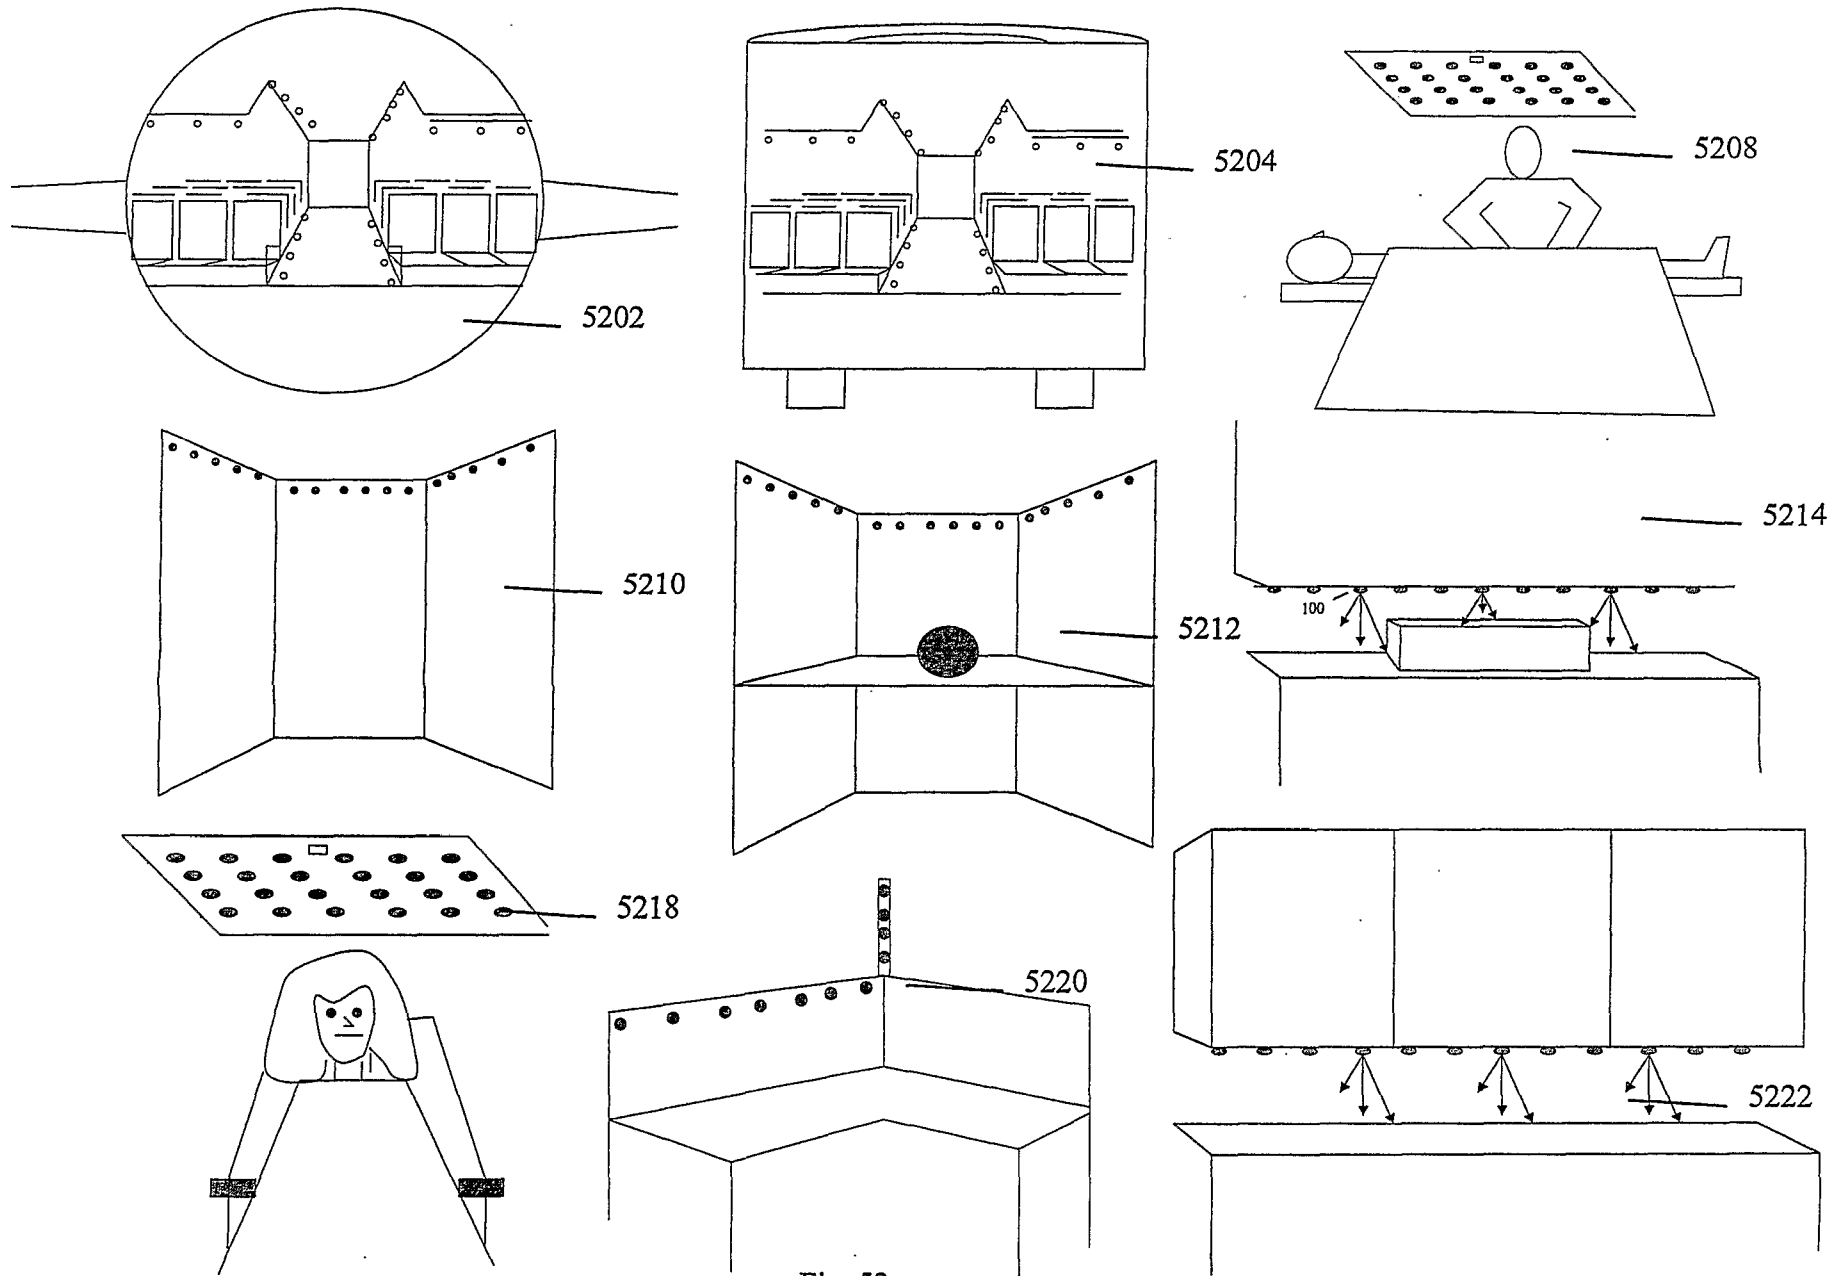


Fig. 52

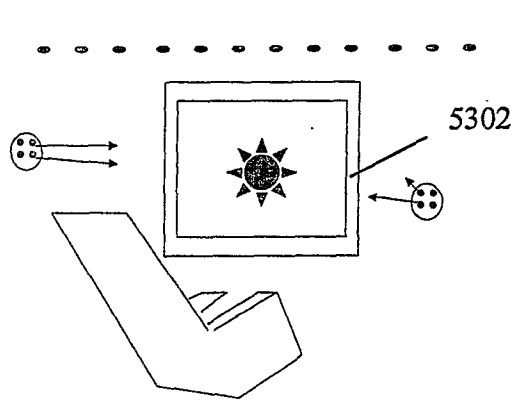
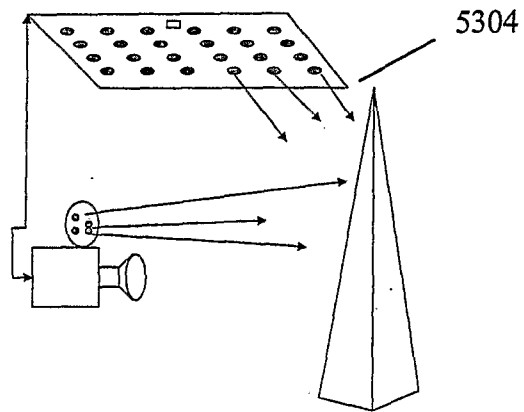
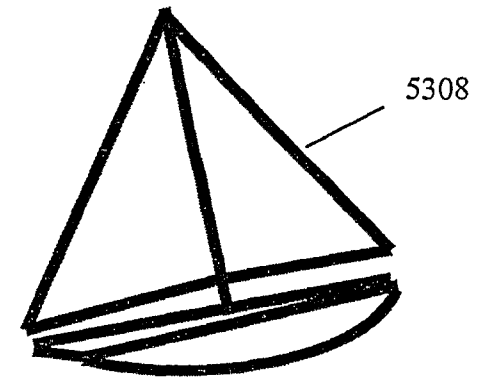
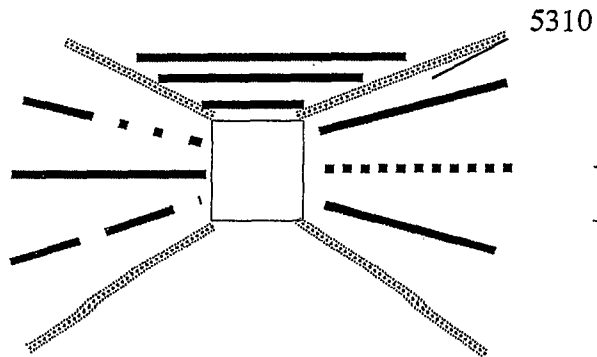
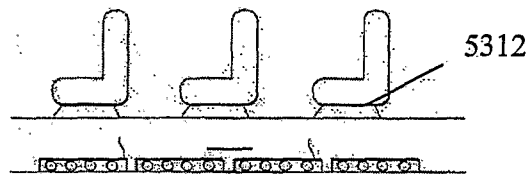
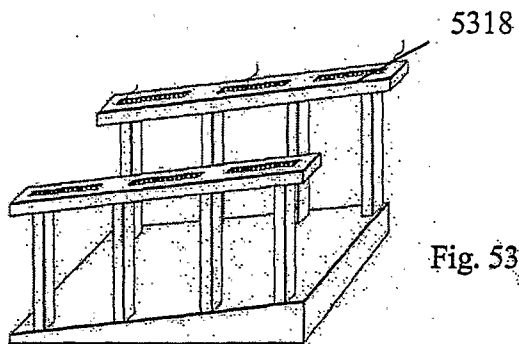
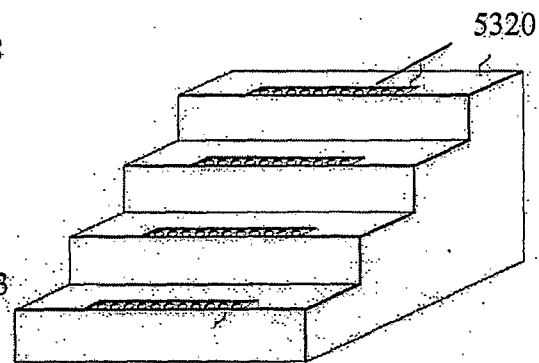
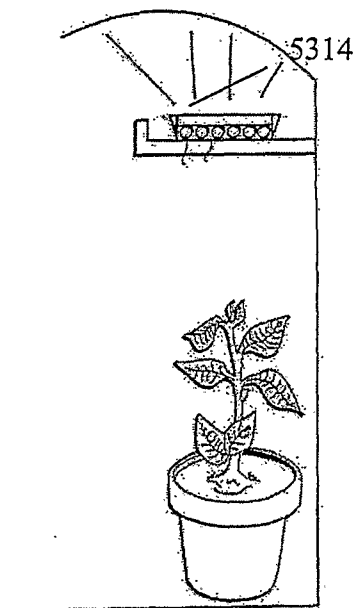


Fig. 53

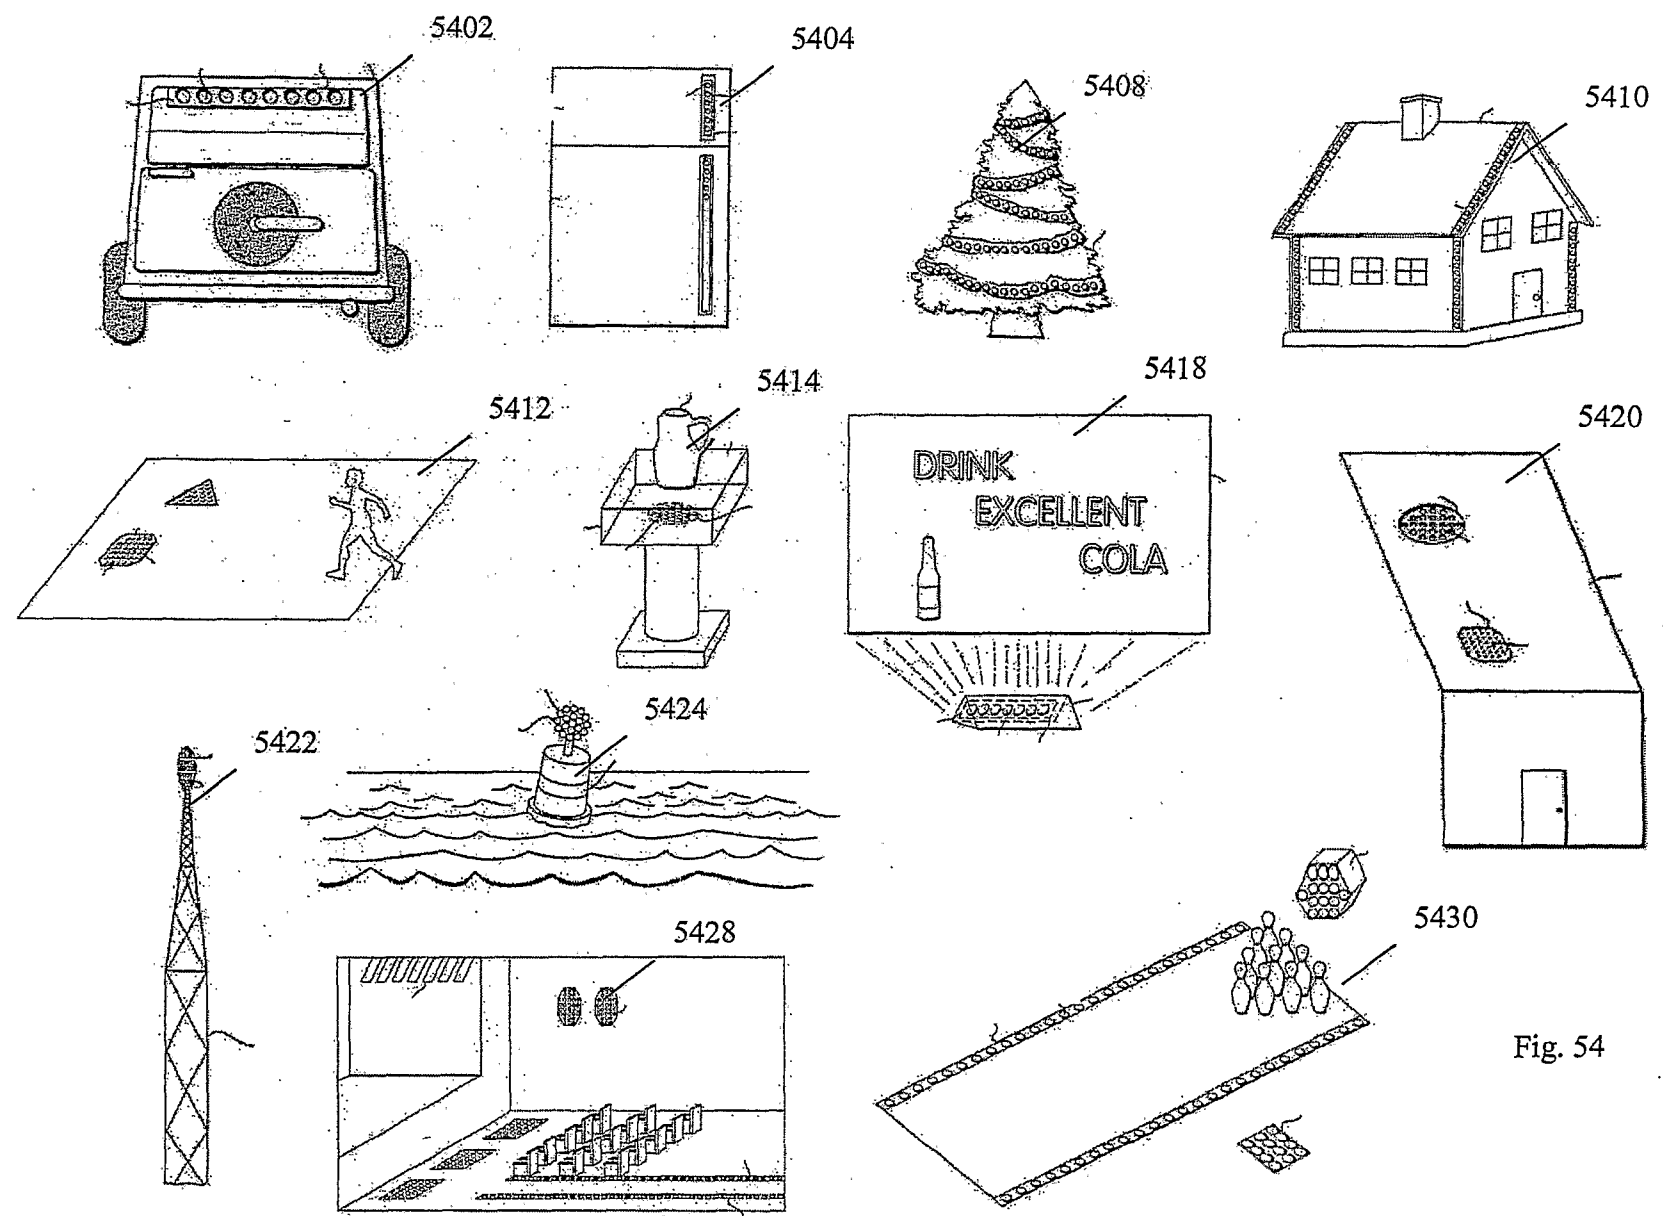
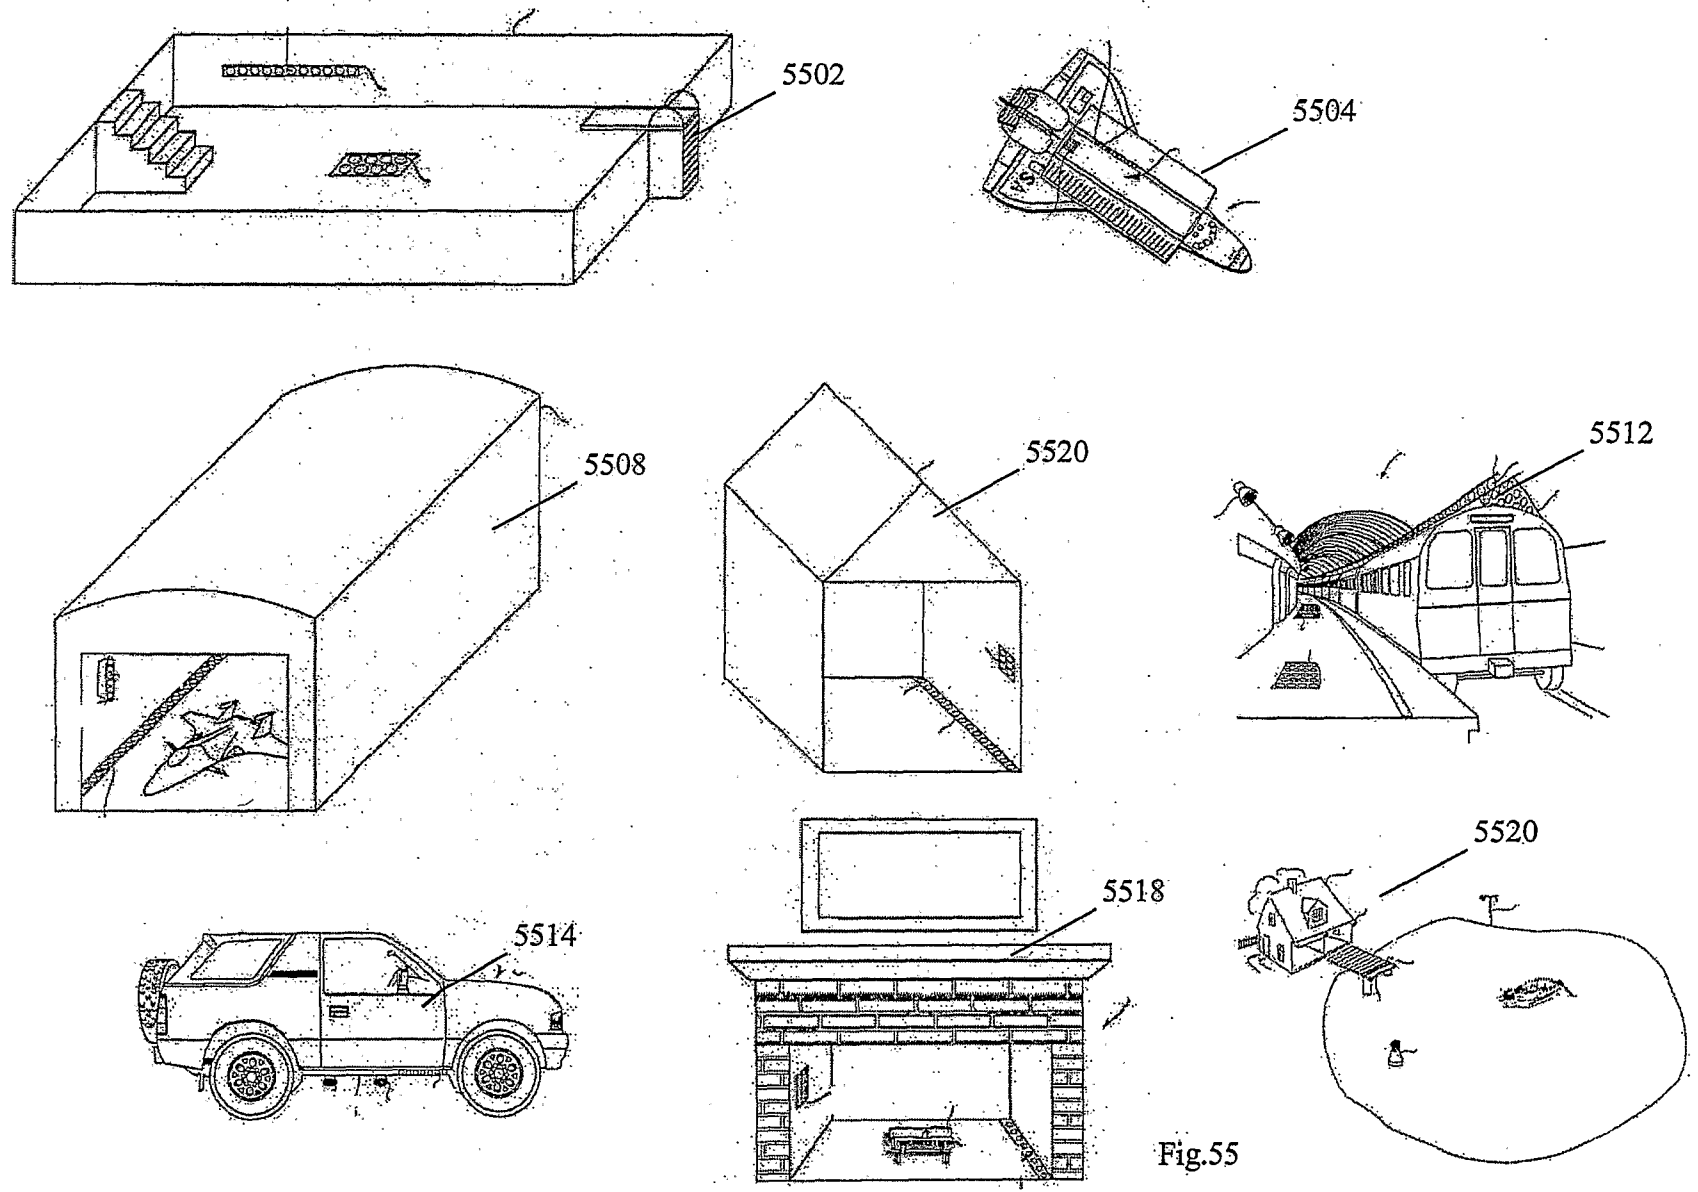


Fig. 54



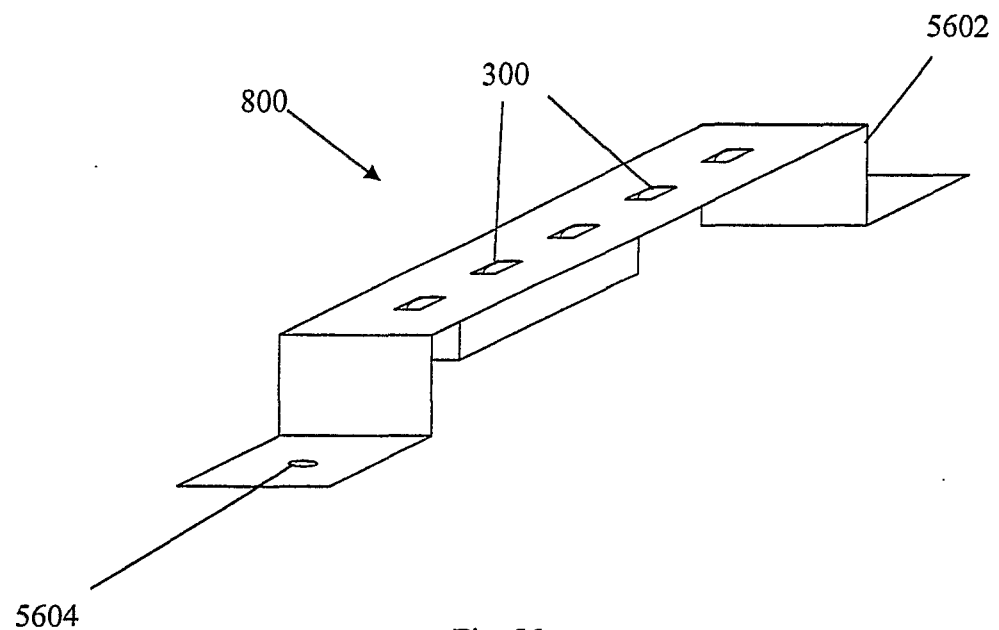


Fig. 56

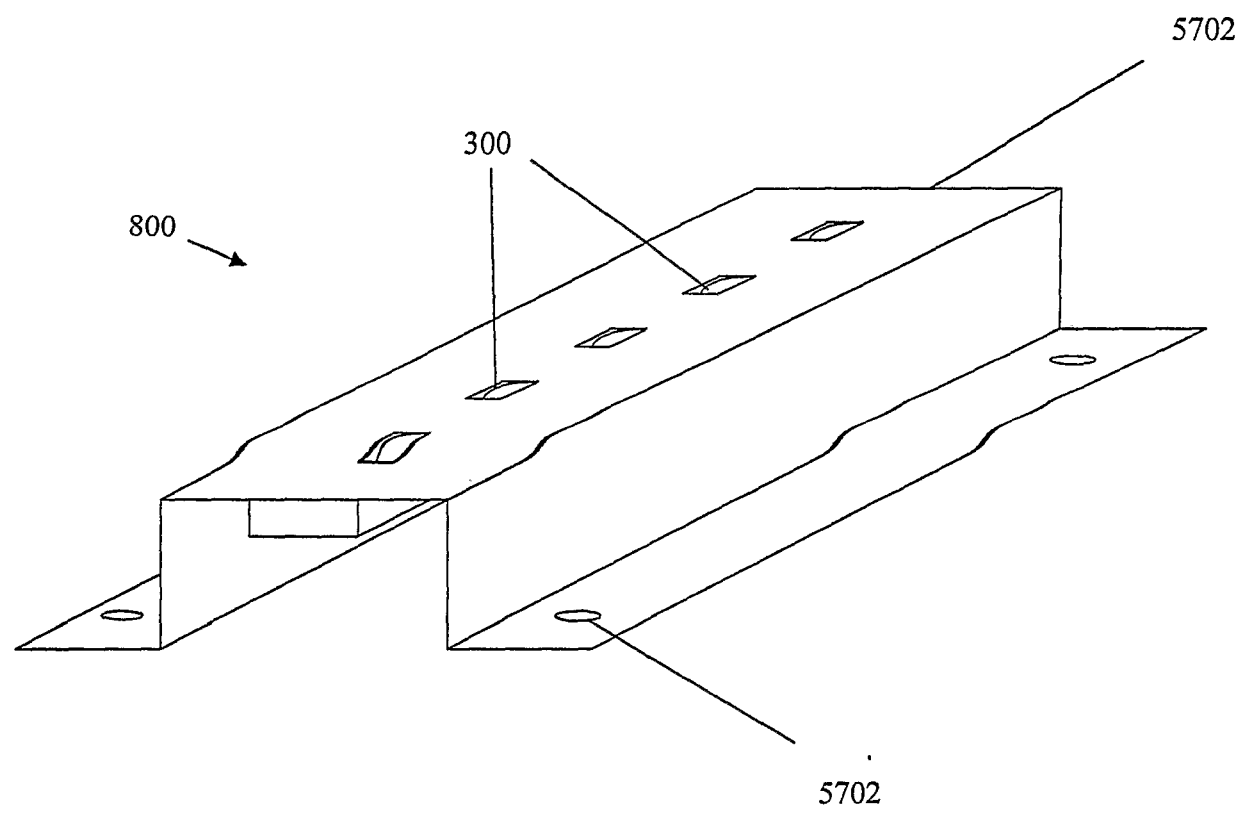
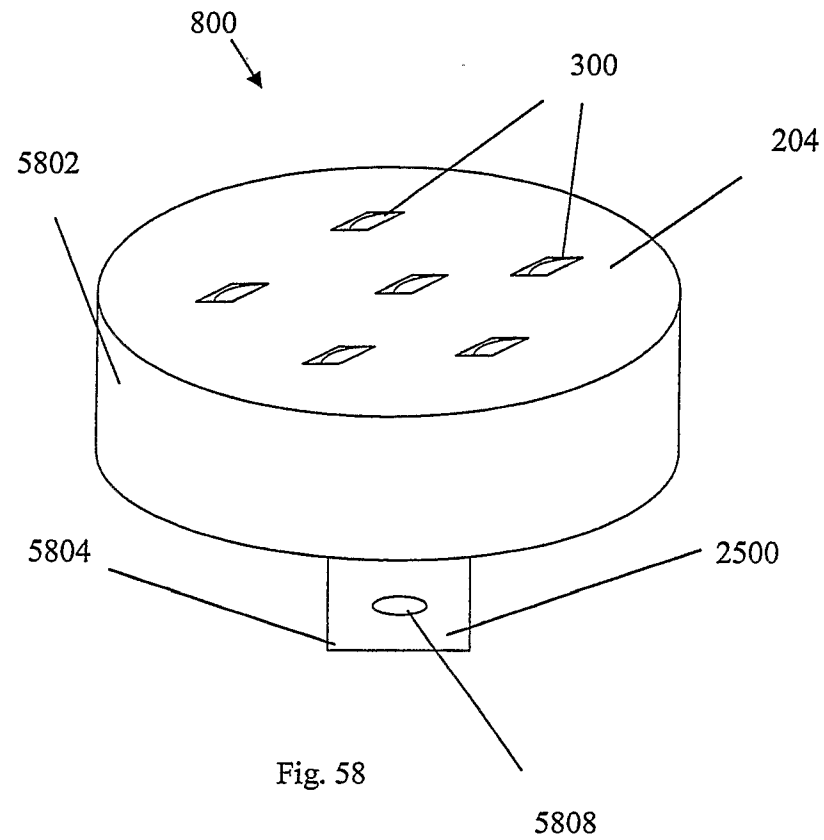


Fig. 57



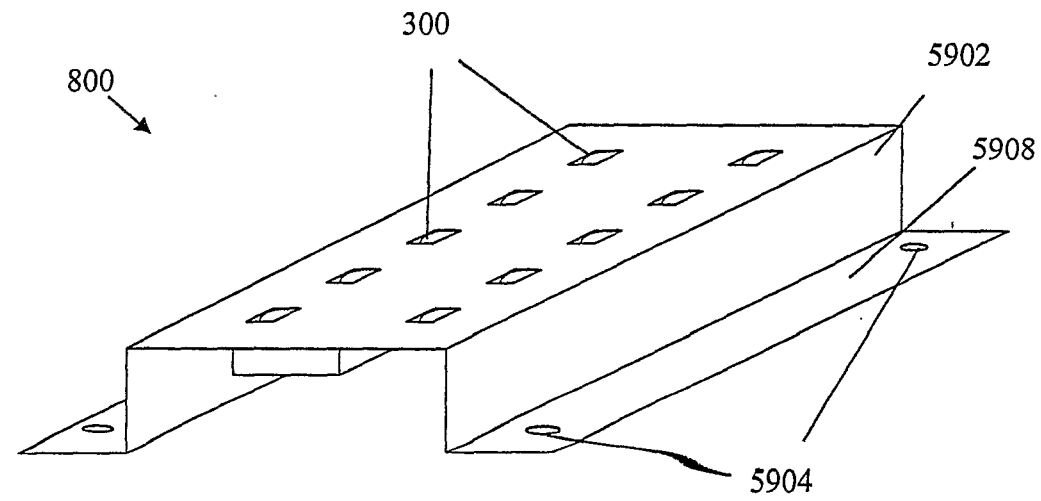


Fig. 59

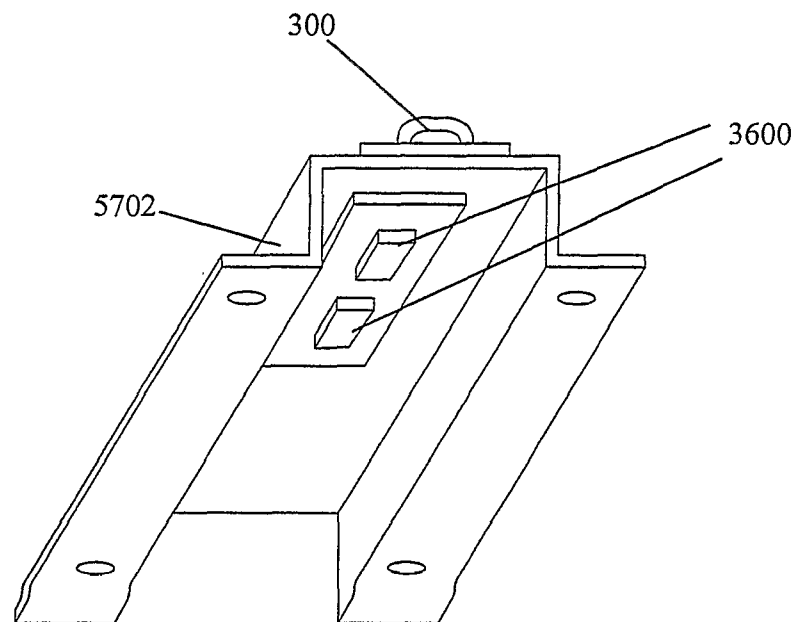


Fig. 60

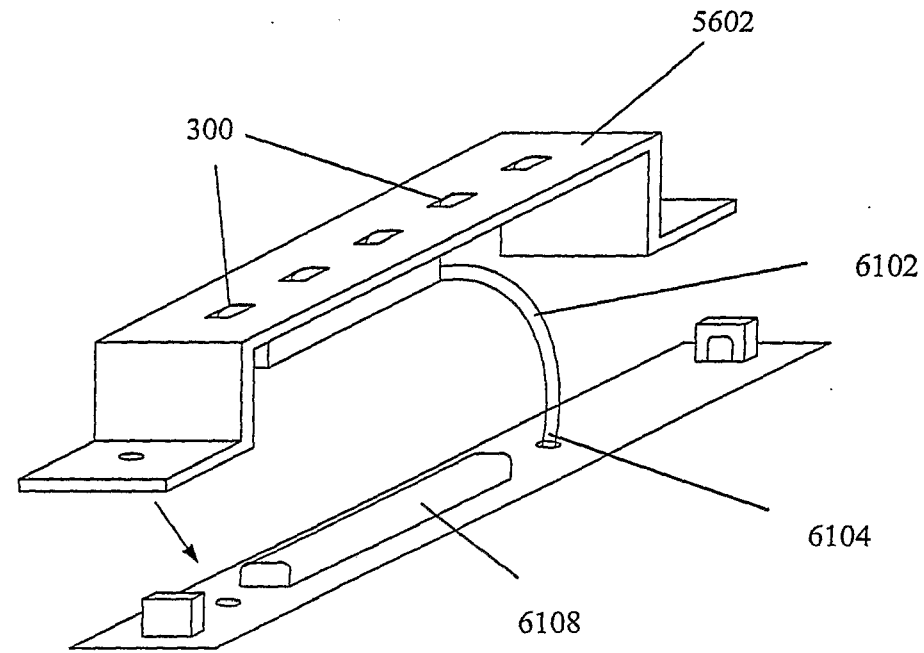


Fig. 61

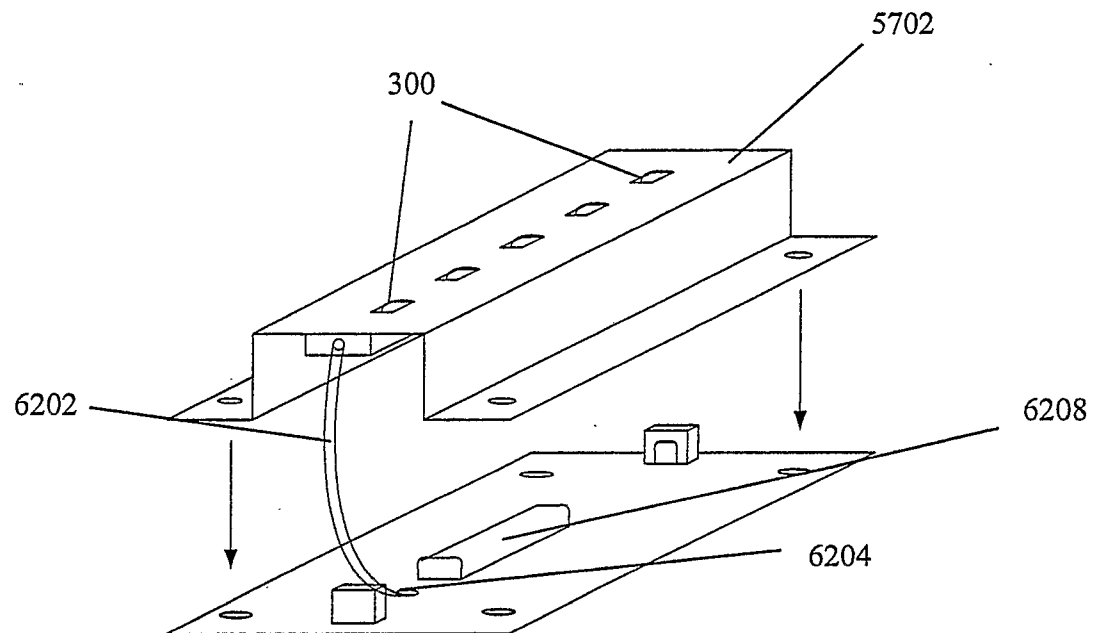


Fig. 62

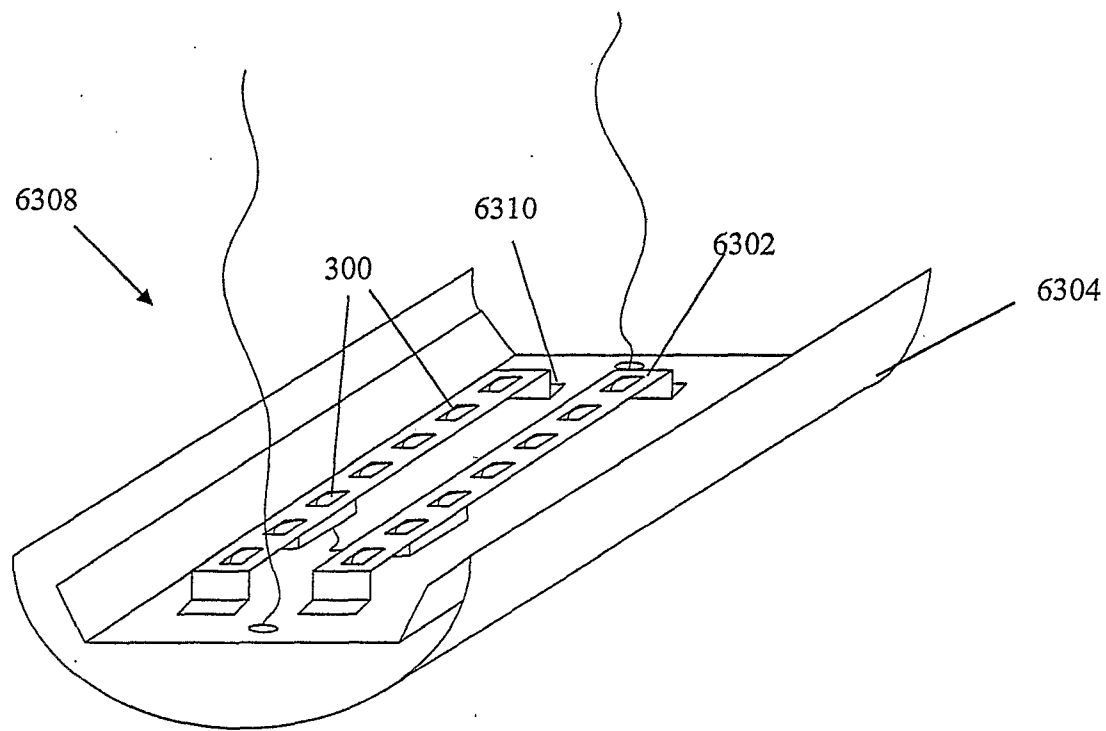


Fig. 63

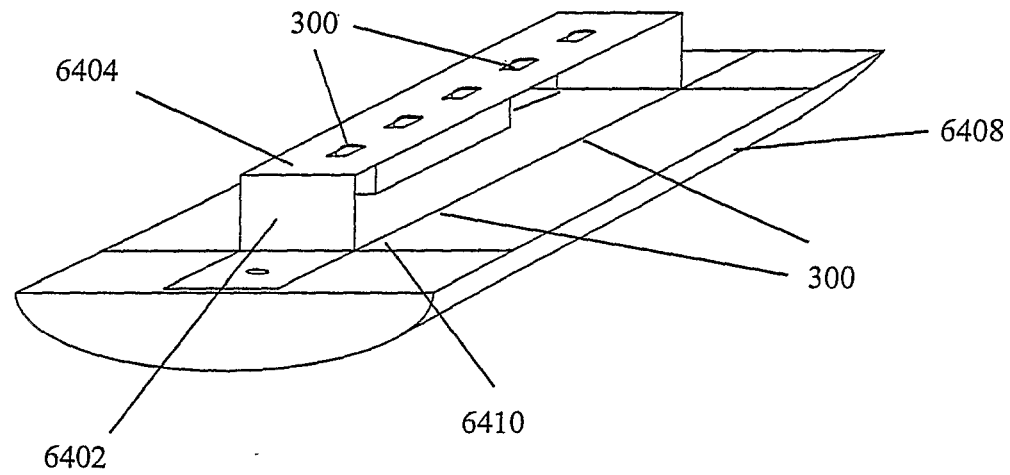


Fig. 64

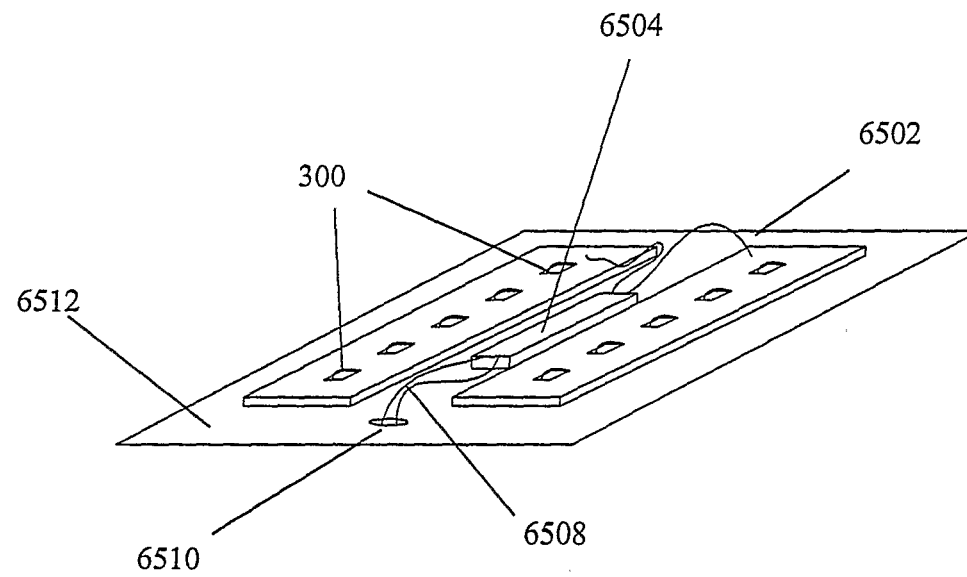


Fig. 65

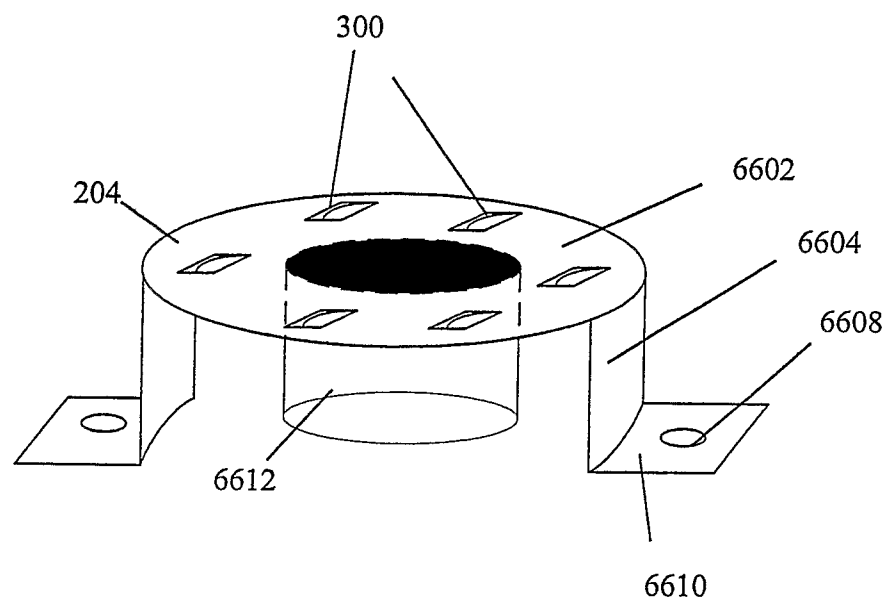


Fig. 66

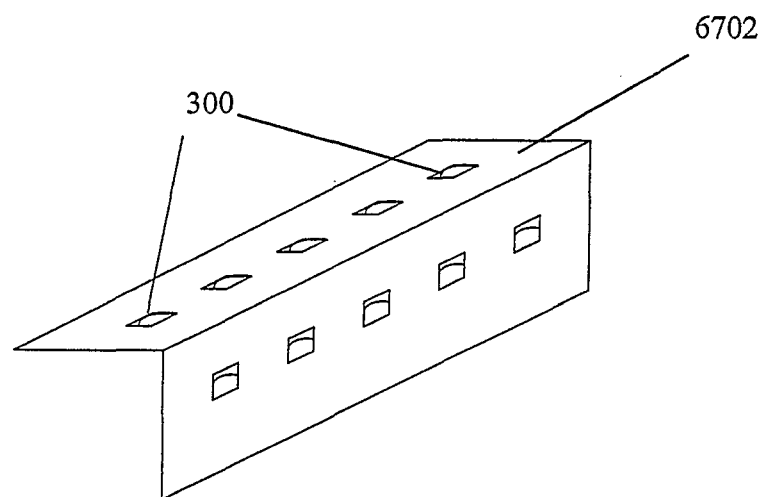


Fig. 67

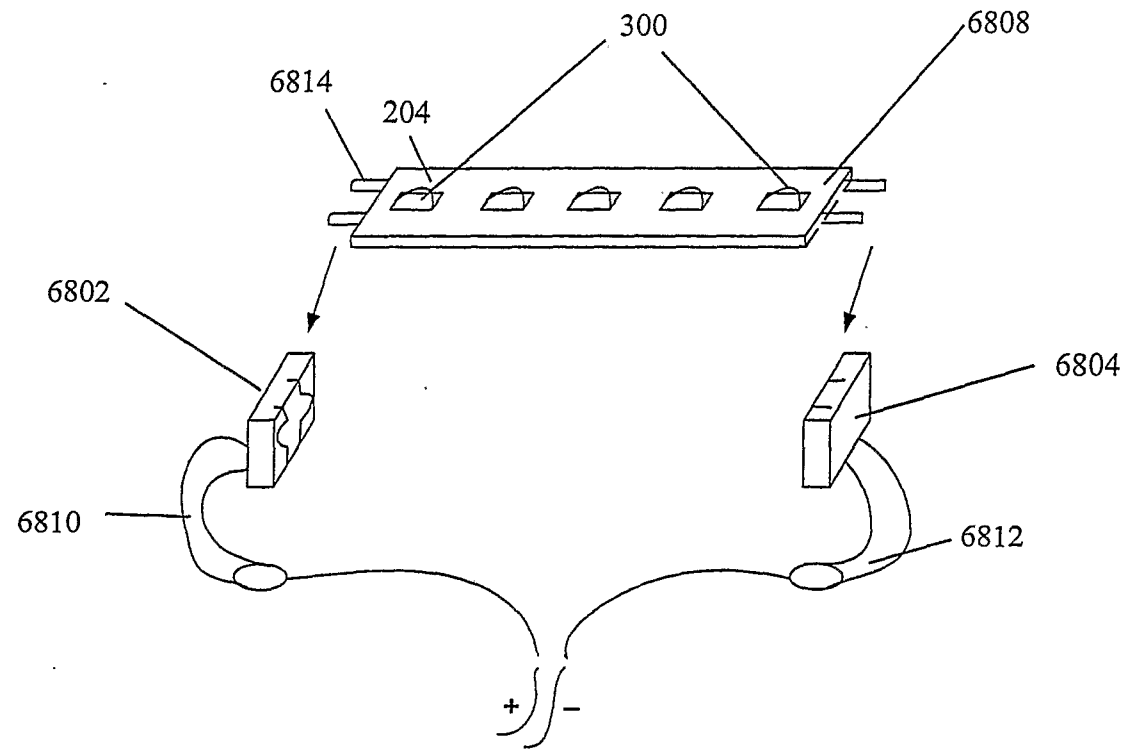


Fig. 68

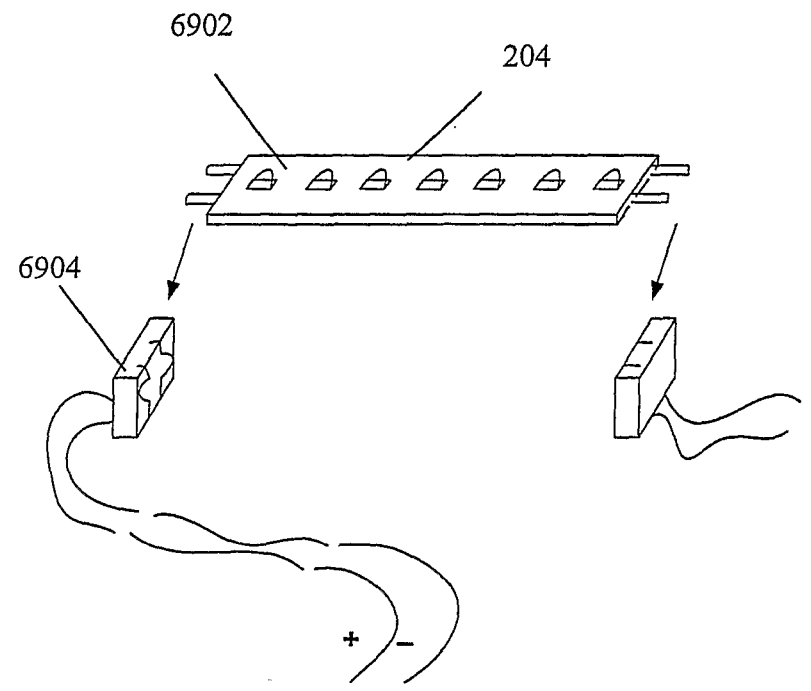


Fig. 69

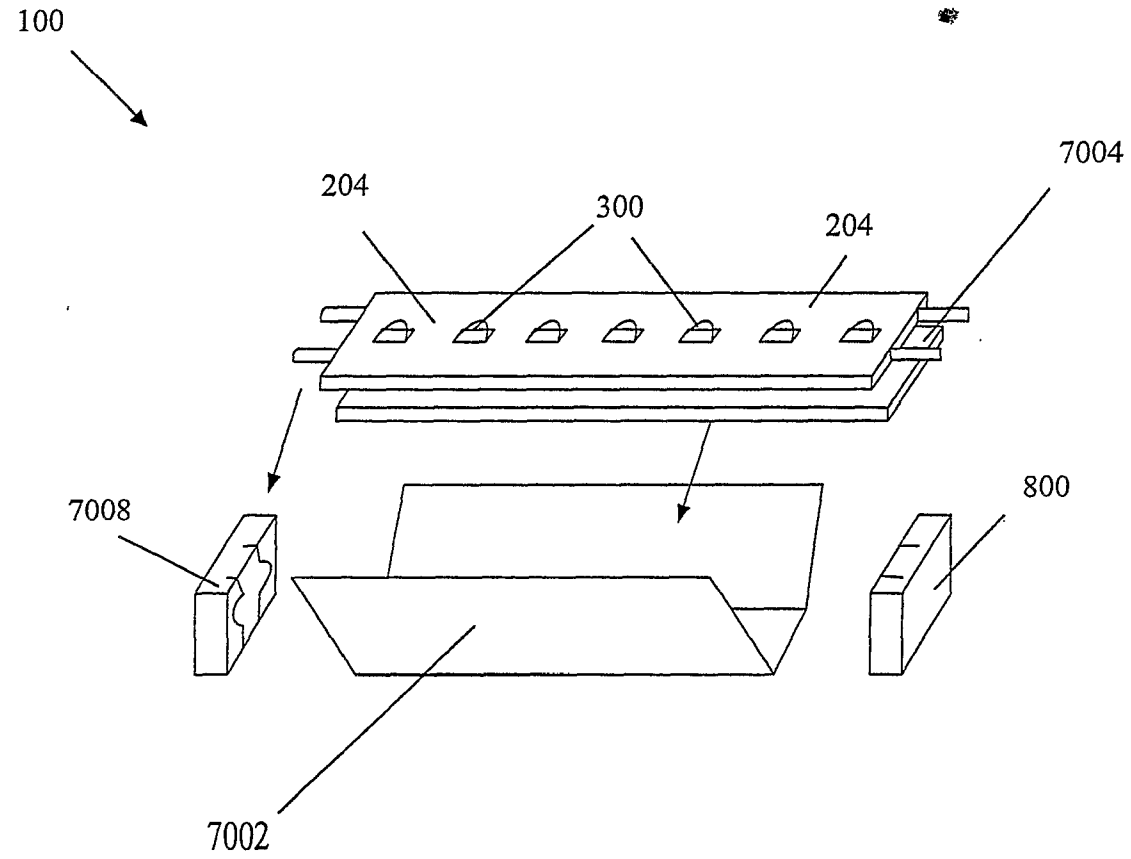


Fig. 70

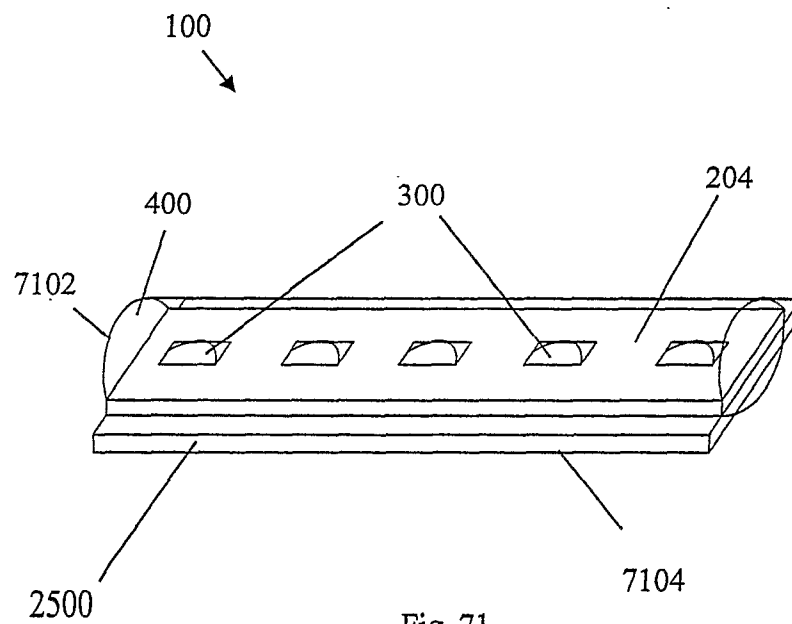


Fig. 71

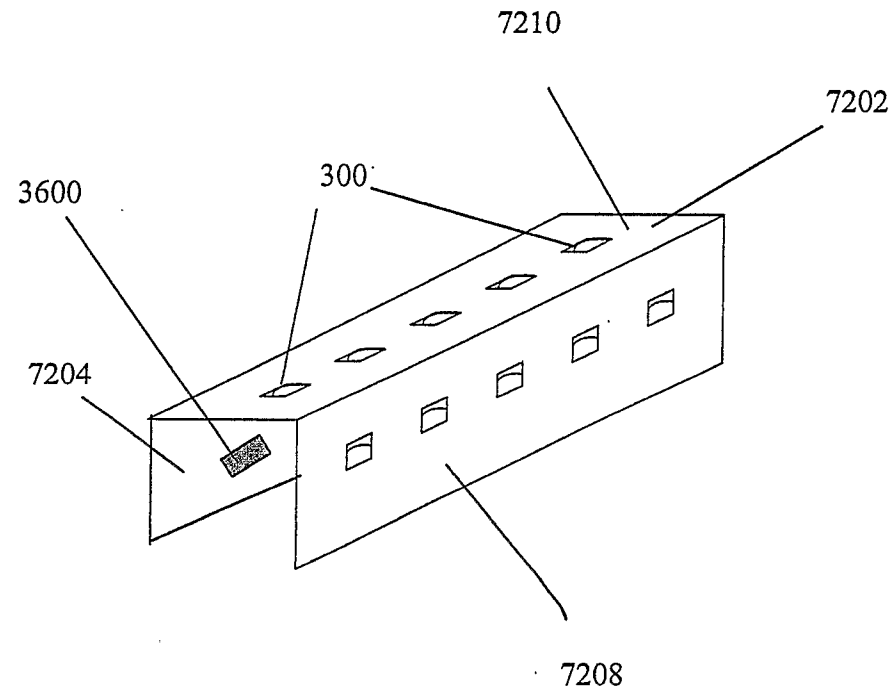


Fig. 72

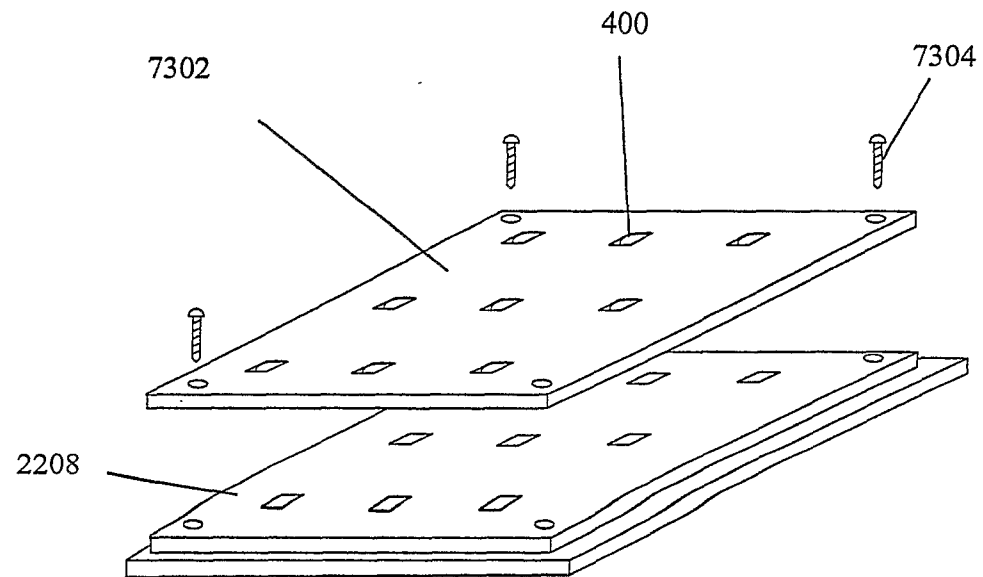


Fig. 73

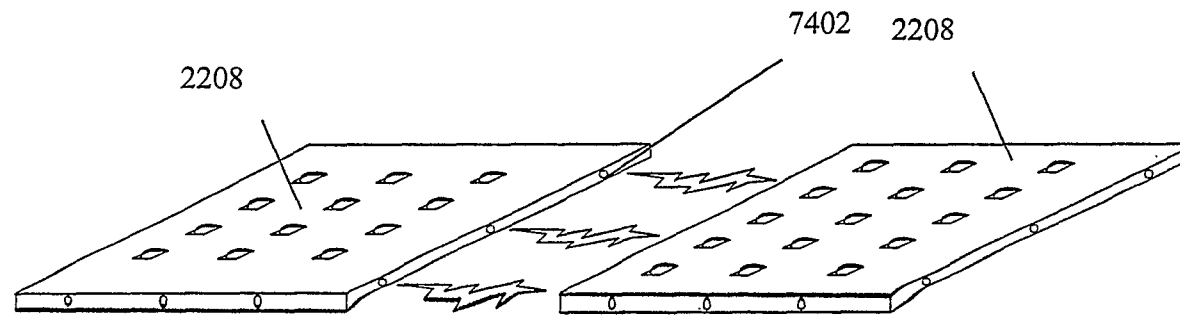


Fig. 74

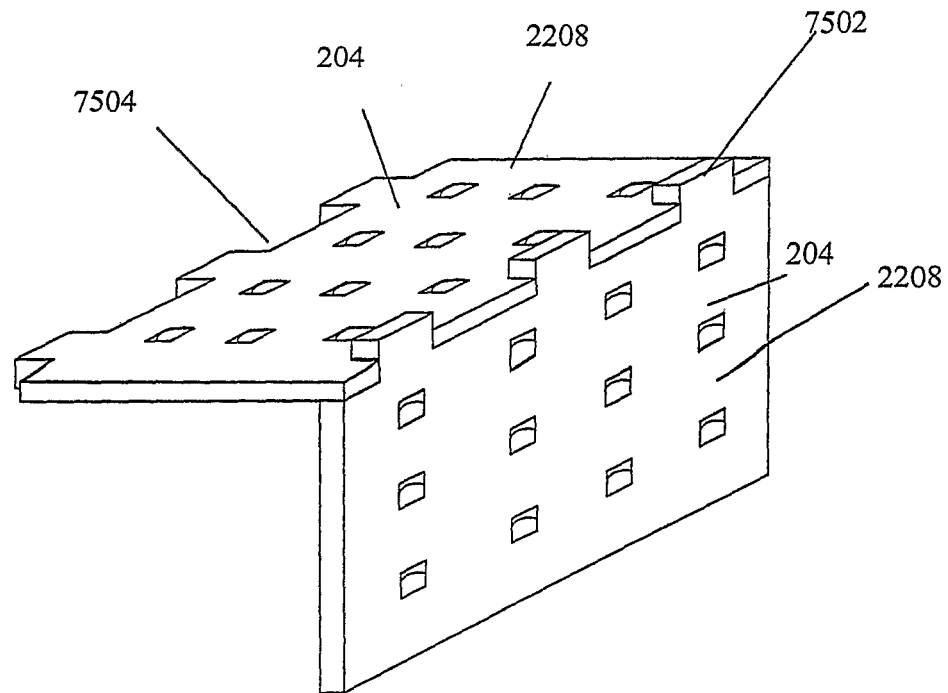


Fig. 75

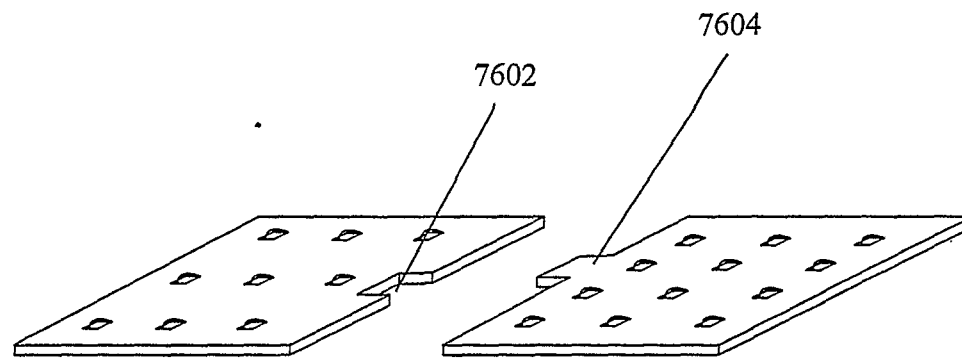


Fig. 76

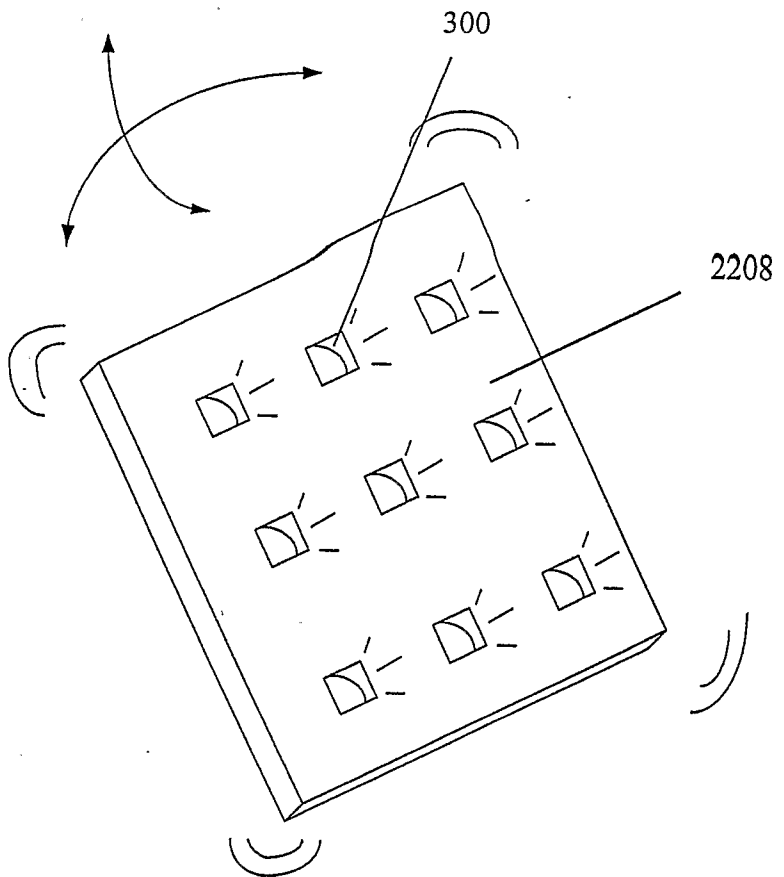


Fig. 77

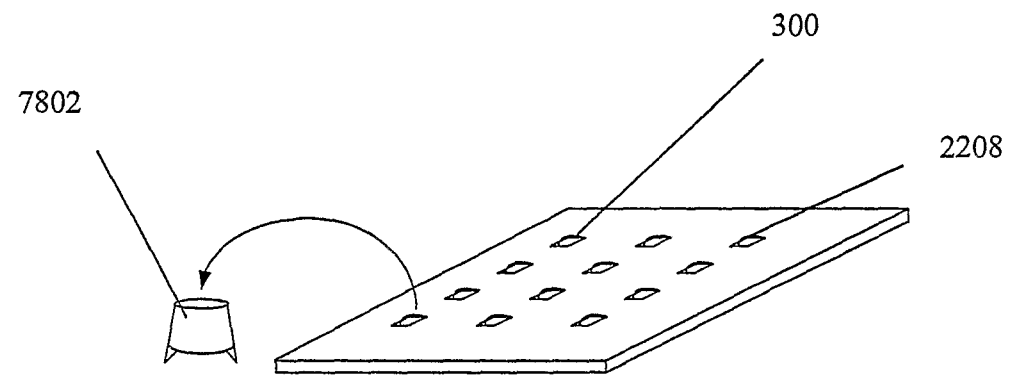


Fig. 78

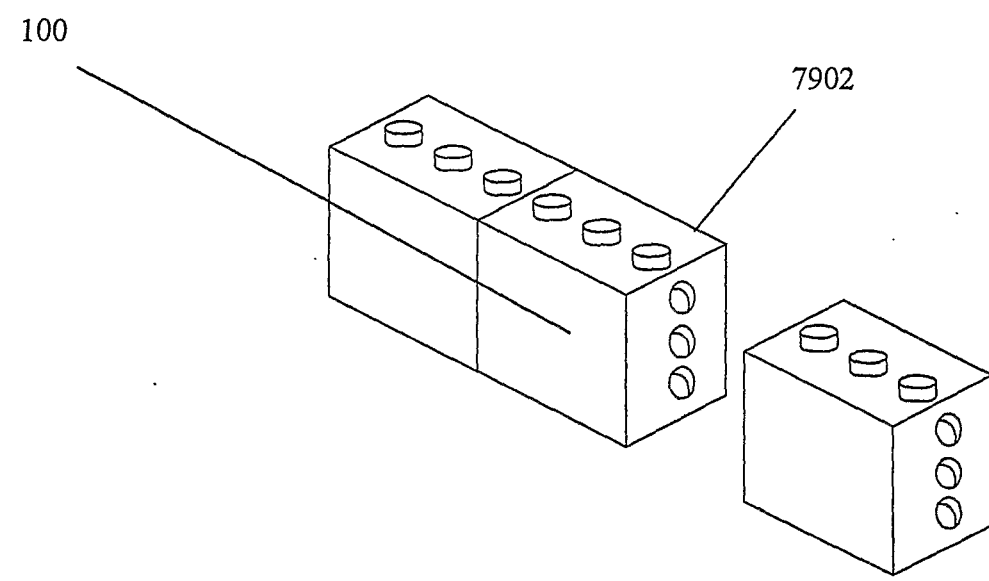


Fig. 79

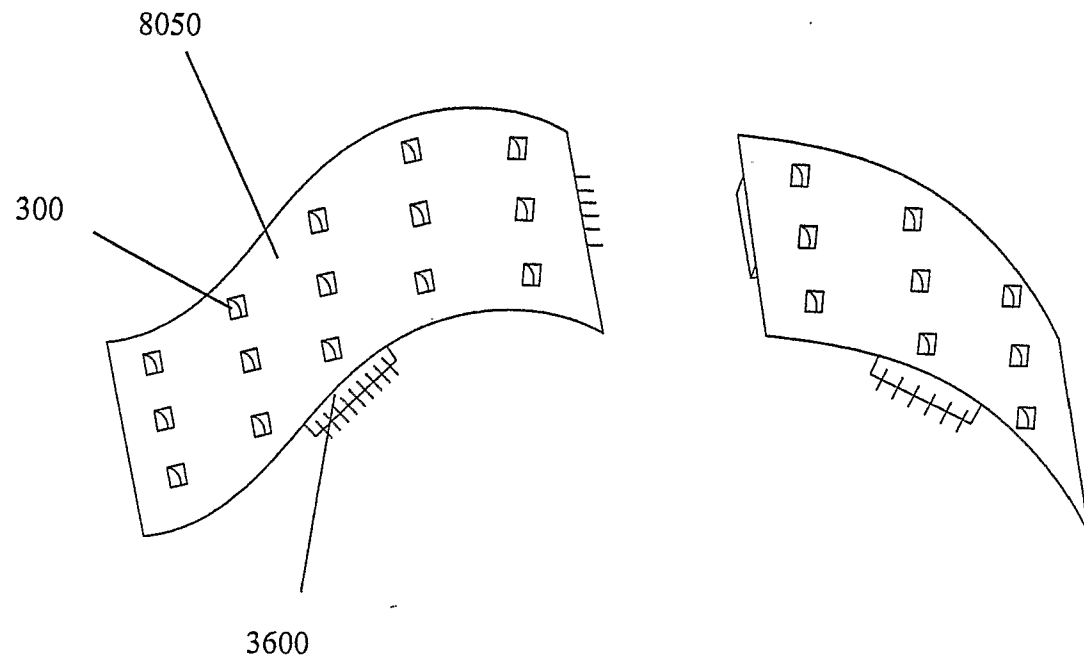


Fig. 80

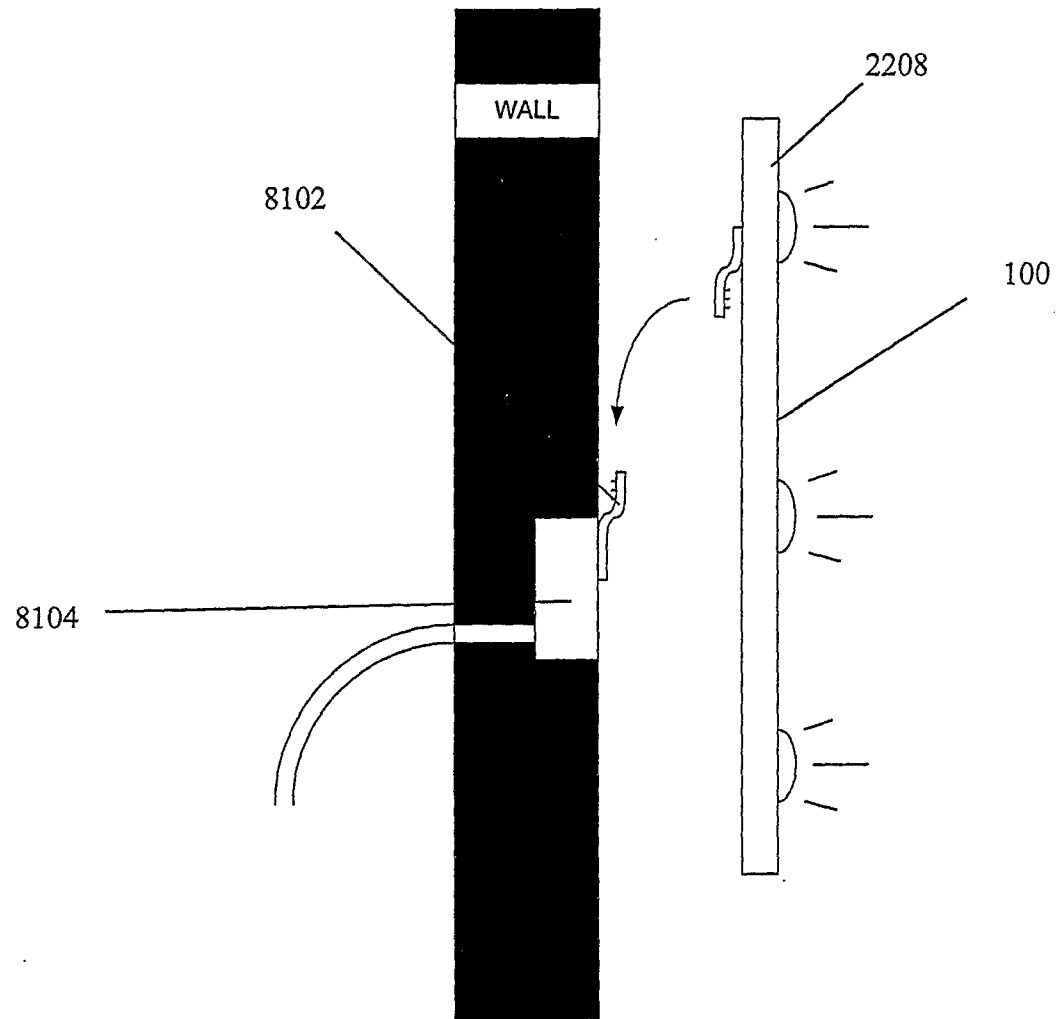


Fig. 81