10.3.7.35 Intra-frequency measured results list

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Intra-frequency measurement results	OP	1 to <maxCellMeas>		
>Cell measured results	MP		Cell measured results 10.3.7.3	Only cells for which all reporting quantities are available should be included.

10.3.7.36 Intra-frequency measurement

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Intra-frequency measurement objects list	OP		Intra-frequency cell info list 10.3.7.33	
Intra-frequency measurement quantity	OP		Intra-frequency measurement quantity 10.3.7.38	
Intra-frequency reporting quantity	OP		Intra-frequency reporting quantity 10.3.7.41	
Reporting cell status	CV-*reporting*		Reporting cell status 10.3.7.61	
Measurement validity	OP		Measurement validity 10.3.7.51	
CHOICE *report criteria*	OP			
>Intra-frequency measurement reporting criteria			Intra-frequency measurement reporting criteria 10.3.7.39	
>Periodical reporting criteria			Periodical reporting criteria 10.3.7.53	
>No reporting				(no data) Chosen when this measurement only is used as additional measurement to another measurement

Condition	Explanation
reporting	This IE is optional if the CHOICE "*report criteria*" is equal to "periodical reporting criteria" or "No reporting", otherwise the IE is not needed

10.3.7.37 Intra-frequency measurement event results

This IE contains the measurement event results that are reported to UTRAN for intra-frequency measurements.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Intra-frequency event identity	MP		Intra-frequency event identity 10.3.7.34	
Cell measurement event results	MP		Cell measurement event results 10.3.7.4	

10.3.7.38 Intra-frequency measurement quantity

The quantity the UE shall measure in case of intra-frequency measurement. It also includes the filtering of the measurements.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Filter coefficient	MP		Filter coefficient 10.3.7.9	
CHOICE *mode*	MP			
>FDD				
>>Measurement quantity	MP		Enumerated(CPICH Ec/N0, CPICH RSCP, Pathloss)	
>TDD				
>>Measurement quantity list	MP	1 to 4		
>>>Measurement quantity	MP		Enumerated(Primary CCPCH RSCP, Pathloss, Timeslot ISCP)	

10.3.7.39 Intra-frequency measurement reporting criteria

The triggering of the event-triggered reporting for an intra-frequency measurement. All events concerning intra-frequency measurements are labelled 1x where x is a, b, c….

Event 1a: A Primary CPICH enters the Reporting Range (FDD only).

Event 1b: A Primary CPICH leaves the Reporting Range (FDD only).

Event 1c: A Non-active Primary CPICH becomes better than an active Primary CPICH (FDD only).

Event 1d: Change of best cell (FDD only).

Event 1e: A Primary CPICH becomes better than an absolute threshold (FDD only).

Event 1f: A Primary CPICH becomes worse than an absolute threshold (FDD only).

Event 1g: Change of best cell in TDD.

Event 1h: Timeslot ISCP below a certain threshold (TDD only).

Event 1i: Timeslot ISCP above a certain threshold (TDD only).

Event 1j: A Non-active E-DCH but active DCH Primary CPICH becomes better than an active E-DCH Primary CPICH (FDD only).

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Parameters required for each event	OP	1 to <maxMeasEvent>			
>Intra-frequency event identity	MP		Intra-frequency event identity 10.3.7.34		
>Triggering condition 1	CV–*clause 0*		Enumerated(Active set cells, Monitored set cells, Active set cells and monitored set cells)	Indicates which cells can trigger the event	
>Triggering condition 2	CV–*clause 6*		Enumerated(Active set cells, Monitored set cells, Active set cells and monitored set cells, Detected set cells, Detected set cells and monitored set cells)	Indicates which cells can trigger the event	
	CV-clause 10				REL-5
>Reporting Range Constant	CV–*clause 2*		Real(0..14.5 by step of 0.5)	In dB. In event 1a,1b.	
>Cells forbidden to affect Reporting range	CV–*clause 1*	1 to <maxCellMeas>		In event 1a,1b	
>>CHOICE *mode*	MP				
>>>FDD					
>>>>Primary CPICH info	MP		Primary CPICH info 10.3.6.60		
>>>TDD					
>>>>Primary CCPCH info	MP		Primary CCPCH info 10.3.6.57		
>W	CV–*clause 2*		Real(0.0..2.0 by step of 0.1)		
>Hysteresis	MP		Real(0..7.5 by step of 0.5)	In dB.	

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>Threshold used frequency	CV-*clause 3*		Integer (-115..165)	Range used depend on measurement quantity. CPICH RSCP -115..-25 dBm CPICH Ec/No -24..0 dB Pathloss 30..165dB ISCP -115..-25 dBm	
			Integer (-120..165)	Range used depend on measurement quantity. CPICH RSCP -120..-25 dBm CPICH Ec/No -24..0 dB Pathloss 30..165dB ISCP -120..-25 dBm	REL-6
>$Delta_{Threshold\ used\ frequency}$	CV-*clause 8*		Integer(-5..-1)	If present, the actual value of Threshold used frequency = Threshold used frequency + $Delta_{Threshold\ used\ frequency}$	REL-5
				Not used in Release 6 and later	REL-6
>Reporting deactivation threshold	CV–*clause 4*		Integer(0, 1, 2, 3, 4, 5, 6, 7)	In event 1a Indicates the maximum number of cells allowed in the active set in order for event 1a to occur. 0 means not applicable .	
>Replacement activation threshold	CV-*clause 5*		Integer(0, 1, 2, 3, 4, 5, 6, 7)	In event 1c Indicates the minimum number of cells allowed in the active set in order for event 1c to occur. 0 means not applicable	
				In event 1j Indicates the minimum number of cells allowed in the E-DCH active set in order for event 1j to occur. For event 1j values 5, 6 and 7 are not applicable. 0 means not applicable	REL-6
>Time to trigger	MP		Time to trigger 10.3.7.64	Indicates the period of time during which the event condition has to be satisfied, before sending a Measurement Report. Time in ms	
>Amount of reporting	CV–*clause 7*		Integer(1, 2, 4, 8, 16, 32, 64, Infinity)	In case the IE "Intra-frequency reporting criteria" is included in the IE "Inter-frequency measurement", this IE is not needed.	

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>Reporting interval	CV–*clause 7*		Integer(0, 250, 500, 1000, 2000, 4000, 8000, 16000)	Indicates the interval of periodical reporting when such reporting is triggered by an event. Interval in milliseconds. 0 means no periodical reporting. In case the IE "Intra-frequency reporting criteria" is included in the IE "Inter-frequency measurement", this IE is not needed.	
>Reporting cell status	OP		Reporting cell status 10.3.7.61		
>Periodical reporting information-1b	CV–*clause 9*		Periodical reporting info-1b 10.3.7.53 aa	In case the IE "Intra-frequency reporting criteria" is included in the IE "Inter-frequency measurement", this IE is not needed.	REL-5
>Use CIO	CV-*clause 10*		Boolean	TRUE indicates that the cell individual offset shall be used for event evaluation	REL-5

Condition	Explanation
Clause 0	The IE is mandatory present if the IE "Intra-frequency event identity" is set to "1b" or "1f", otherwise the IE is not needed.
Clause 1	The IE is optional if the IE "Intra-frequency event identity" is set to "1a" or "1b", otherwise the IE is not needed.
Clause 2	The IE is mandatory present if the IE "Intra-frequency event identity" is set to "1a" or "1b", otherwise the IE is not needed.
Clause 3	The IE is mandatory present if the IE "Intra-frequency event identity" is set to , "1e", "1f", "1h" or "1i", otherwise the IE is not needed.
Clause 4	The IE is mandatory present if the IE "Intra-frequency event identity" is set to "1a", otherwise the IE is not needed.
Clause 5	The IE is mandatory present if the IE "Intra-frequency event identity" is set to "1c" or 1j , otherwise the IE is not needed.
Clause 6	The IE is mandatory present if the IE "Intra-frequency event identity" is set to "1a" or "1e", otherwise the IE is not needed.
Clause 7	The IE is mandatory present if the IE "Intra-frequency event identity" is set to "1a", "1c" or 1j, otherwise the IE is not needed.
Clause 8	The IE is optional if the IE "Intra-frequency event identity" is set to "1e", "1f", "1h" or "1i". Otherwise the IE is not needed.
Clause 9	The IE is optional if the IE "Intra-frequency event identity" is set to "1b", otherwise the IE is not needed.
Clause 10	The IE is optional if the IE "Intra-frequency event identity" is set to "1d", otherwise the IE is not needed.

IPR2025-00221 Exhibit 2007 Page 1205 of 2358

10.3.7.40 Intra-frequency measurement system information

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Intra-frequency measurement identity	MD		Measurement identity 10.3.7.48	The intra-frequency measurement identity has default value 1.
Intra-frequency cell info list	OP		Intra-frequency cell info list 10.3.7.33	
Intra-frequency measurement quantity	OP		Intra-frequency measurement quantity 10.3.7.38	
Intra-frequency reporting quantity for RACH Reporting	OP		Intra-frequency reporting quantity for RACH Reporting 10.3.7.42	
Maximum number of reported cells on RACH	OP		Maximum number of reported cells on RACH 10.3.7.43	
Reporting information for state CELL_DCH	OP		Reporting information for state CELL_DCH 10.3.7.62	Note 1

NOTE 1: The reporting of intra-frequency measurements is activated when state CELL_DCH is entered.

10.3.7.41 Intra-frequency reporting quantity

Contains the reporting quantity information for an intra-frequency measurement.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Reporting quantities for active set cells	MP		Cell reporting quantities 10.3.7.5	
Reporting quantities for monitored set cells	MP		Cell reporting quantities 10.3.7.5	
Reporting quantities for detected set cells	OP		Cell reporting quantities 10.3.7.5	

10.3.7.42 Intra-frequency reporting quantity for RACH reporting

Contains the reporting quantity information for an intra-frequency measurement report, which is sent on the RACH.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SFN-SFN observed time difference reporting indicator	MP		Enumerated(No report,	

Information Element/Group name	Need	Multi	Type and reference	Semantics description
			type 1, type 2)	
CHOICE *mode*	MP			
>FDD				
>>Reporting quantity	MP		Enumerated(CPICH Ec/N0, CPICH RSCP, Pathloss, No report)	
>TDD				
>>Reporting quantity list	MP	1 to 2		
>>>Reporting quantity	MP		Enumerated(Timeslot ISCP, Primary CCPCH RSCP, No report)	

10.3.7.43 Maximum number of reported cells on RACH

Contains the maximum number of intra-frequency cells to be reported on RACH.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Maximum number of reported cells	MP		Enumerated (no report, current cell, current cell + best neighbour, current cell+2 best neighbours, …, current cell+6 best neighbours)	

10.3.7.43a MBMS preferred frequency information

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS preferred frequency list	MP	1 to < maxMBMS-Freq>			REL-6
>MBMS preferred frequency	OP		Integer(1 .. <maxMBMS-Freq>)	Absence of this information element means the currently used frequency. Value n corresponds with the nth frequency included in the IE New inter-frequency cells that is specified within SIB 11	REL-6
>CHOICE *Layer convergence information*	MP				REL-6
>>No HCS					REL-6
>>>Qoffmbms	MP		Enumerated (4, 8, 12, 16, 20, 30, 40, infinity)	The offset in decibel [dB] added to cells on this MBMS preferred frequency	REL-6
>>HCS					REL-6
>>>HCS_OFF_{mbms}	MP		Integer (0..7)	Offset added to the normal HCS priority level of cells on this MBMS preferred frequency	REL-6
>MBMS PL Service Restriction Information	OP		Enumerated (TRUE)	Included if some service restrictions apply for this preferred frequency e.g. congestion	REL-6

10.3.7.44 Measured results

Contains the measured results of the quantity indicated optionally by Reporting Quantity in Measurement Control. "Measured results" can be used for both event trigger mode and periodical reporting mode. For intra-frequency and inter-frequency measurements the list shall be in the order of the value of the measurement quantity (the first cell shall be the best cell). The "best" FDD cell has the largest value when the measurement quantity is "Ec/No" or "RSCP". On the other hand, the "best" cell has the smallest value when the measurement quantity is "Pathloss". The "best" TDD cell has the largest value when measurement quantity is "Primary CCPCH RSCP". For intra-frequency measurements, the ordering shall be applied to all cells included in the IE "Measured results". For inter-frequency measurements, the ordering shall be applied to all cells on the same frequency included in the IE "Measured results". For other measurements, the order of reported measurement objects is not specified.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
CHOICE *Measurement*	MP			One spare value is needed.
>Intra-frequency measured results list			Intra-frequency measured results list 10.3.7.35	
>Inter-frequency measured results list			Inter-frequency measured results list 10.3.7.15	
>Inter-RAT measured results list			Inter-RAT measured results list 10.3.7.26	
>Traffic volume measured			Traffic	

Information Element/Group name	Need	Multi	Type and reference	Semantics description
results list			volume measured results list 10.3.7.67	
>Quality measured results list			Quality measured results list 10.3.7.55	
>UE Internal measured results			UE Internal measured results 10.3.7.76	
>UE positioning measured results			UE positioning measured results 10.3.7.99	

10.3.7.45 Measured results on RACH

For measurements on used frequency, this IE contains the measured results on RACH of the quantity indicated by Reporting quantity in the IE "Intra-frequency reporting quantity for RACH Reporting" in system information broadcast on BCH. The list, measurement results for monitored cells (not including the current cell) shall be in the order of the value of the measurement quantity as indicated by Reporting Quantity in the IE "Intra-frequency reporting quantity for RACH Reporting" (the first cell shall be the best cell).

For measurements on non-used frequencies, this IE includes the best cell on each non- used frequency, in order of decreasing quality and up to a maximum number as specified by the IE "Maximum number of inter-frequency RACH reporting cells".

The "best" FDD cell has the largest value when the measurement quantity is "Ec/No" or "RSCP". On the other hand, the "best" cell has the smallest value when the measurement quantity is "Pathloss". The "best" TDD cell has the largest value when measurement quantity is "Primary CCPCH RSCP".

Information Element/group name	Need	Multi	Type and reference	Semantics description	Version

Information Element/group name	Need	Multi	Type and reference	Semantics description	Version
Measurement result for current cell	MP				
>CHOICE *mode*	MP				
>>FDD					
>>>CHOICE *measurement quantity*	MP			One spare value is needed.	
>>>>CPICH Ec/N0			Integer(0..49)	In dB. According to CPICH_Ec/No in [19]. Fourteen spare values are needed.	
>>>>CPICH RSCP			Integer(0..91)	In dBm. According to CPICH_RSCP_LEV in [19]. Thirty-six spare values are needed.	
>>>>Pathloss			Integer(46..158)	In dB. Fifteen spare values are needed.	
>>TDD					
>>>CHOICE *TDD option*	MP				REL-4
>>>>3.84 Mcps TDD					REL-4
>>>>>Timeslot List	OP	1 to 14			
>>>>>>Timeslot ISCP	MP		Timeslot ISCP info 10.3.7.65	The UE shall report the Timeslot ISCP in the same order as indicated in the cell info	
>>>7.68 Mcps TDD					REL-7
>>>>Timeslot List	OP	1 to 14			REL-7
>>>>>Timeslot ISCP	MP		Timeslot ISCP info 10.3.7.65	The UE shall report the Timeslot ISCP in the same order as indicated in the cell info	REL-7
>>>>1.28 Mcps TDD					REL-4
>>>>>Timeslot List	OP	1 to 6			REL-4
>>>>>>Timeslot ISCP	MP		Timeslot ISCP info 10.3.7.65	The UE shall report the Timeslot ISCP in the same order as indicated in the cell info	REL-4
>>>Primary CCPCH RSCP	OP		Primary CCPCH RSCP info 10.3.7.54		
Measurement results for monitored cells on used frequency	OP	1 to 8			
>SFN-SFN observed time difference	OP		SFN-SFN observed time difference 10.3.7.63		
>CHOICE *mode*	MP				
>>FDD					
>>>Primary CPICH info	MP		Primary CPICH info		

Information Element/group name	Need	Multi	Type and reference	Semantics description	Version
			10.3.6.60		
>>>CHOICE *measurement quantity*	OP			One spare value is needed.	
>>>>CPICH Ec/N0			Integer(0..49)	In dB. According to CPICH_Ec/No in [19]. Fourteen spare values are needed.	
>>>>CPICH RSCP			Integer(0..91)	In dBm. According to CPICH_RSCP_LEV in [19]. Thirty-six spare values are needed.	
>>>>Pathloss			Integer(46..158)	In dB. Fifteen spare values are needed.	
>>TDD					
>>>Cell parameters Id	MP		Cell parameters Id 10.3.6.9		
>>>Primary CCPCH RSCP	MP		Primary CCPCH RSCP info 10.3.7.54		
Measurement results for monitored cells on non-used frequencies	OP				REL-6
>Inter-frequency cell indication-SIB11	MP		Integer (0..1)		REL-6
>Inter-frequency cell indication-SIB12	MP		Integer (0..1)		REL-6
>Inter-frequency cell list	MP	1 to <maxFreq>			REL-6
>>Inter-frequency cell id	MP		Integer(0 .. <maxCellMeas>-1)		REL-6

NOTE: Monitored cells consist of neighbouring cells.

10.3.7.46 Measurement Command

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Measurement command	MP		Enumerated(Setup, Modify, Release)	

10.3.7.47 Measurement control system information

Information element/Group name	Need	Multi	Type and reference	Semantics description
Use of HCS	MP		Enumerated (Not used, used)	Indicates if the serving cell belongs to a HCS structure
Cell selection and reselection quality measure	MP		Enumerated (CPICH Ec/N0, CPICH RSCP)	Choice of measurement (CPICH Ec/N0 or CPICH RSCP) to use as quality measure Q. NOTE: For TDD,each choice of this parameter represents PCCPCH RSCP.
Intra-frequency measurement system information	OP		Intra-frequency measurement system information 10.3.7.40	
Inter-frequency measurement system information	OP		Inter-frequency measurement system information 10.3.7.20	
Inter-RAT measurement system information	OP		Inter-RAT measurement system information 10.3.7.31	
Traffic volume measurement system information	OP		Traffic volume measurement system information 10.3.7.73	

10.3.7.47a Measurement control system information extension

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
Intra-frequency cell info list	OP				REL-6
>New intra-frequency cells	MP	1 to <maxCellMeas>			REL-6
>>Intra-frequency cell id	OP		Integer(0 .. <maxCellMeas> - 1)		REL-6
>>Cell info	MP		Cell info 10.3.7.2		REL-6
Inter-frequency cell info list	OP				REL-6
>New inter-frequency cells	MP	1 to <maxCellMeas>			REL-6
>>Frequency Info	MD		Frequency info 10.3.6.36	Default value is the value of the previous "frequency info" in the list. NOTE: The first occurrence is then MP.	REL-6
>>Inter-frequency cell id	OP		Integer(0 .. <maxCellMeas> - 1)		REL-6
>>Cell info	MP		Cell info 10.3.7.2		REL-6
Inter-RAT cell info list	OP				REL-6
>>New inter-RAT cells	MP	1 to <maxCellMeas>			REL-6
>>Inter-RAT cell id	OP		Integer(0 .. <maxCellMeas> - 1)		REL-6
>>CHOICE *Radio Access Technology*	MP				REL-6
>>>GSM					REL-6
>>>>Cell individual offset	MP		Integer (-50..50)	In dB Used to offset measured quantity value	REL-6
>>>>Cell selection and re-selection info	OP		Cell selection and re-selection info for SIB11/12 10.3.2.4	See subclause 8.6.7.3	REL-6
>>>>BSIC	MP		BSIC 10.3.8.2		REL-6
>>>>Band indicator	MP		Enumerated (DCS 1800 band used, PCS 1900 band used)	Indicates how to interpret the BCCH ARFCN	REL-6
>>>>BCCH ARFCN	MP		Integer (0..1023)	[45]	REL-6
>>>IS-2000					REL-6
>>>>System specific measurement info	MP		enumerated (frequency, timeslot, colour code, output power, PN offset)	For IS-2000, use fields from TIA/EIA/IS-2000.5, subclause 3.7.3.3.2.27, *Candidate*	REL-6

				Frequency Neighbour List Message	
>>>None			(no data)	This value has been introduced to handle the case when IE "New inter-RAT cells" is not required	REL-6

10.3.7.48 Measurement Identity

A reference number that is used by the UTRAN at modification and release of the measurement, and by the UE in the measurement report.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Measurement identity	MP		Integer(1..16)	

10.3.7.49 Measurement reporting mode

Contains the type of Measurement Report transfer mode and the indication of periodical/event trigger.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Measurement Report Transfer Mode	MP		enumerated (Acknowledged mode RLC, Unacknowledged mode RLC)	
Periodical Reporting / Event Trigger Reporting Mode	MP		Enumerated (Periodical reporting, Event trigger)	

10.3.7.50 Measurement Type

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Measurement Type	MP		Enumerated(Intra-frequency, Inter-frequency, Inter-RAT, Traffic volume, Quality, UE internal, UE positioning)	

10.3.7.51 Measurement validity

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE state	MP		Enumerated(CELL_DCH, all states except CELL_DCH, all states)	

10.3.7.52 Void

10.3.7.53 Periodical reporting criteria

Contains the periodical reporting criteria information. It is necessary only in the periodical reporting mode.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Amount of reporting	MD		Integer(1, 2, 4, 8, 16, 32, 64, Infinity)	The default value is infinity.
Reporting interval	MP		Integer(250, 500, 1000, 2000, 3000, 4000, 6000, 8000, 12000, 16000, 20000, 24000, 28000, 32000, 64000)	Indicates the interval of periodical report. Interval in milliseconds

10.3.7.53aa Periodical reporting info-1b

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Amount of reporting	MP		Integer(1, 2, 4, 8, 16, 32, 64, Infinity)		REL-5
Reporting interval	MP		Integer(0, 250, 500, 1000, 2000, 4000, 8000, 16000)	Indicates the interval of periodical reporting when such reporting is triggered by an event. Interval in milliseconds. 0 means no periodical reporting.	REL-5

10.3.7.53a PLMN identities of neighbour cells

This IE contains the PLMN identities of neighbour cells.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
PLMNs of intra-frequency cells list	OP	1 to <maxCellMeas>		

Information Element/Group name	Need	Multi	Type and reference	Semantics description
>PLMN identity	OP		PLMN identity 10.3.1.11	Action when not present is specified in subclause 8.1.1.6.18.
PLMNs of inter-frequency cells list	OP	1 to <maxCellMeas>		
>PLMN identity	OP		PLMN identity 10.3.1.11	Action when not present is specified in subclause 8.1.1.6.18.
PLMNs of inter-RAT cells list	OP	1 to <maxCellMeas>		
>PLMN identity	OP		PLMN identity 10.3.1.11	Action when not present is specified in subclause 8.1.1.6.18.

10.3.7.54 Primary CCPCH RSCP info

NOTE: Only for TDD

Information Element/Group name	Need	Multi	IE type and reference	Semantics description	Version
Primary CCPCH RSCP	MP		Integer(0..91)	According to P-CCPCH_RSCP_LEV in [19] and [20]. Thirty-six spare values are needed.	
$Delta_{Primary\ CCPCH\ RSCP}$	CV-*Rel5*		Integer(-5..-1)	If present, the actual value of Primary CCPCH RSCP = Primary CCPCH RSCP+ $Delta_{Primary\ CCPCH\ RSCP}$	REL-5

Condition	Explanation
Rel5	This IE is mandatory if the value of Primary CCPCH RSCP is below 0. Othewise the IE is not needed.

10.3.7.54a Qhcs

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
Qhcs	MP		Integer(0..99)	Qhcs, mapped from CPICH Ec/No (FDD), see [4] [dB] 0: -24 1: -23.5 2: -23 3: -22.5 ... 45: -1.5 46: -1 47: -0.5 48: 0 49: (spare) ... 98: (spare) 99: (spare)	
				Qhcs, mapped from CPICH RSCP (FDD), see [4] [dBm] 0: -115 1: -114 2: -113 : 88: -27 89: -26 90: -(spare) 91: -(spare) : 98: -(spare) 99: -(spare)	
				Qhcs, mapped from PCCPCH RSCP (TDD), see [4] [dBm] 0: -115 1: -114 2: -113 : 88: -27 89: -26 90: -(spare) 91: -(spare) : 98: -(spare) 99: -(spare)	

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
				Qhcs level, mapped from Averaged received signal level RSSI (GSM), see [4] [dBm] 0: -110 1: -109 2: -108 : 61: -49 62: -48 63: -47 64: -46 65: -45 66: -44 67: -43 68: -42 69: -41 70: -40 71: -39 72: -38 73: -37 74: -(spare) : 98: -(spare) 99: -(spare)	
$Delta_{Qhcs-RSCP}$	CV-*RSCP*		Integer(-5..-1)	If present, the actual value of Qhcs = Qhcs + $Delta_{Qhcs-RSCP}$	REL-5

Condition	Explanation
RSCP	This IE is optional if Qhcs is mapped from CPICH RSCP or PCCPCH RSCP, and if the value of the RSCP is below 0 (-115dBm). It is not needed otherwise.

10.3.7.55 Quality measured results list

Information Element/Group name	Need	Multi	Type and reference	Semantics description
BLER measurement results	OP	1 to <maxTrCH>		
>DL Transport channel identity	MP		Transport channel identity 10.3.5.18	transport channel type = DCH
>DL Transport Channel BLER	OP		Integer (0..63)	According to BLER_LOG in [19] and [20]
CHOICE *mode*	MP			
>FDD				No data
>TDD				
>>SIR measurement results	OP	1 to <MaxCCTrCH>		SIR measurements for DL CCTrCH
>>>TFCS ID	MP		Integer(1...8)	
>>>Timeslot list	MP	1 to <maxTS>		for all timeslot on which the CCTrCH is mapped on
>>>>SIR	MP		Integer(0..63)	According to UE_SIR in [20]

10.3.7.56 Quality measurement

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Quality reporting quantity	OP		Quality reporting quantity 10.3.7.59	
CHOICE *report criteria*	MP			
>Quality measurement reporting criteria			Quality measurement reporting criteria 10.3.7.58	Note Given this choice, the IE "DL Transport Channel BLER" shall be set to "False" (see subclause 10.3.7.59)
>Periodical reporting criteria			Periodical reporting criteria 10.3.7.53	Note
>No reporting				Note (no data) Chosen when this measurement only is used as additional measurement to another measurement

NOTE: In this version of the specification, BLER as additional measurement is not supported.

10.3.7.57 Quality measurement event results

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Transport channels causing the event	OP	1 to <maxTrCH>		
>DL Transport channel identity	MP		Transport channel identity 10.3.5.18	transport channel type = DCH

10.3.7.58 Quality measurement reporting criteria

Event 5a: Number of bad CRCs on a certain transport channel exceeds a threshold.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Parameters sent for each transport channel	MP	1 to <maxTrCH>		
>DL Transport channel identity	MP		Transport channel identity 10.3.5.18	transport channel type = DCH
>Total CRC	MP		Integer(1..512)	Number of CRCs
>Bad CRC	MP		Integer(1..512)	Number of CRCs
>Pending after trigger	MP		Integer(1..512)	Number of CRCs

10.3.7.59 Quality reporting quantity

Information Element/Group name	Need	Multi	Type and reference	Semantics description
DL Transport Channel BLER	MP		Boolean	TRUE means report requested
Transport channels for BLER reporting	CV-*BLER reporting*	1 to <maxTrCH>		The default, if no transport channel identities are present, is that the BLER is reported for all downlink transport channels
>DL Transport channel identity	MP		Transport channel identity 10.3.5.18	transport channel type = DCH
CHOICE *mode*	MP			
>FDD				No data
>TDD				
>>SIR measurement list	OP	1 to <maxCCTrCH>		SIR measurements shall be reported for all listed TFCS IDs
>>>TFCS ID	MP		Integer(1...8)	

Condition	Explanation
BLER reporting	This IE is not needed if the IE "DL Transport Channel BLER" is "False" and optional if the IE "DL Transport Channel BLER" is "True"

10.3.7.60 Reference time difference to cell

In the System Information message, the reference time difference to cell indicates the timing difference between the primary CCPCH of the current cell and the primary CCPCH of a neighbouring cell..

In the Measurement Control message, the reference time difference to cell indicates the timing difference between UE uplink transmission timing and the primary CCPCH of a neighbouring cell.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
CHOICE *accuracy*	MP			
>40 chips				
>>Reference time difference	MP		Integer(0..3840 0 by step of 40)	In chips
>256 chips				
>>Reference time difference	MP		Integer(0.. 38400 by step of 256)	In chips
>2560 chips				
>>Reference time difference	MP		Integer(0.. 38400 by step of 2560)	In chips

10.3.7.61 Reporting Cell Status

Indicates maximum allowed number of cells to report and whether active set cells and/or virtual active set cells and/or monitored set cells on and/or detected set cells used frequency and/or monitored set cells on non used frequency should/should not be included in the IE "Measured results".

Information Element/Group name	Need	Multi	Type and reference	Semantics description
CHOICE *reported cell*	MP			
>Report cells within active set				This choice is not valid for inter-RAT measurements. For inter-frequency measurements

Information Element/Group name	Need	Multi	Type and reference	Semantics description
				it is only valid for reporting events 2D and 2F. See NOTE 1.
>>Maximum number of reported cells	MP		Integer(1..6)	
>Report cells within monitored set cells on used frequency				This choice is not valid for inter-RAT or inter-frequency measurements
>>Maximum number of reported cells	MP		Integer(1..6)	
>Report cells within active set and/or monitored set cells on used frequency				This choice is not valid for inter-RAT or inter-frequency measurements
>>Maximum number of reported cells	MP		Integer(1..6)	
>Report cells within detected set on used frequency				This choice is not valid for inter-RAT or inter-frequency measurements
>>Maximum number of reported cells	MP		Integer(1..6)	
>Report cells within monitored set and/or detected set on used frequency				This choice is not valid for inter-RAT or inter-frequency measurements
>>Maximum number of reported cells	MP		Integer(1..6)	
>Report all active set cells + cells within monitored set on used frequency				This choice is not valid for inter-RAT or inter-frequency measurements
>>Maximum number of reported cells	MP		Enumerated (virtual/active set cells+1, virtual/active set cells+2, …., virtual/active set cells+6)	
>Report all active set cells + cells within detected set on used frequency				This choice is not valid for inter-RAT or inter-frequency measurements
>>Maximum number of reported cells	MP		Enumerated (virtual/active set cells+1, virtual/active set cells+2, …., virtual/active set cells+6)	
>Report all active set cells + cells within monitored set and/or detected set on used frequency				This choice is not valid for inter-RAT or inter-frequency measurements
>>Maximum number of reported cells	MP		Enumerated (virtual/active set cells+1, virtual/active set cells+2, …., virtual/active set cells+6)	
>Report cells within virtual active set				This choice is not valid for intra-frequency or inter-RAT measurements
>>Maximum number of reported cells per reported non-used frequency	MP		Integer(1..6)	
>Report cells within monitored set on non-used frequency				This choice is not valid for intra-frequency or inter-RAT

Information Element/Group name	Need	Multi	Type and reference	Semantics description
				measurements
>>Maximum number of reported cells per reported non-used frequency	MP		Integer(1..6)	
>Report cells within monitored and/or virtual active set on non-used frequency				This choice is not valid for intra-frequency or inter-RAT measurements
>>Maximum number of reported cells per reported non-used frequency	MP		Integer(1..6)	
>Report all virtual active set cells + cells within monitored set on non-used frequency				This choice is not valid for intra-frequency or inter-RAT measurements
>>Maximum number of reported cells per reported non-used frequency	MP		Enumerated (virtual/active set cells+1, virtual/active set cells+2, …., virtual/active set cells+6)	
>Report cells within active set or within virtual active set or of the other RAT				If this choice is selected for inter-RAT measurements, the UE shall report only cells of the other RAT. If this choice is selected for intra-frequency measurements, the UE shall report cells within the active set. If this choice is selected for inter-frequency measurements, the UE shall report cells within the virtual active set.
>>Maximum number of reported cells	MP		Integer (1..12)	
>Report cells within active and/or monitored set on used frequency or within virtual active and/or monitored set on non-used frequency				This choice is not valid for inter-RAT measurements. If this choice is selected for intra-frequency measurements, the UE shall report cells within the active and/or monitored set. If this choice is selected for inter-frequency measurements, the UE shall report cells within the virtual active set and/or monitored set on non-used frequency.
>>Maximum number of reported cells	MP		Integer(1..12)	

NOTE 1: For Inter-frequency reporting events 2D and 2F, only CHOICE "Report cells within active set" is valid.

10.3.7.62 Reporting information for state CELL_DCH

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Intra-frequency reporting quantity	MP		Intra-frequency reporting quantity 10.3.7.41	
Measurement Reporting Mode	MP		Measurement Reporting Mode 10.3.7.49	
CHOICE *report criteria*	MP			
>Intra-frequency measurement reporting criteria			Intra-frequency measurement reporting criteria 10.3.7.39	
>Periodical reporting criteria			Periodical reporting criteria 10.3.7.53	

10.3.7.63 SFN-SFN observed time difference

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE *type*	MP				
>Type 1			Integer(0..9830399)	According to T1_SFN-SFN_TIME in [19] and [20]. For FDD and 3.84 Mcps TDD and 7.68 Mcps TDD: 6946816 spare values are needed.	
			Integer(0..3276799)	For 1.28 Mcps TDD: 13500416 spare values are needed.	Rel-4
>Type 2			Integer(0..40961)	According to T2_SFN-SFN_TIME in [19] and [20]. 24574 spare values are needed.	
			Integer(0..27649)	For 1.28 Mcps TDD: 37886 spare values are needed.	Rel-4

10.3.7.64 Time to trigger

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Time to trigger	MP		Integer(0, 10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640, 1280, 2560, 5000)	Time in ms

10.3.7.65 Timeslot ISCP info

NOTE: Only for TDD

IPR2025-00221 Exhibit 2007

Information Element/Group name	Need	Multi	IE type and reference	Semantics description
Timeslot ISCP	MP		Integer (0..91)	According to UE_TS_ISCP_LEV in [20]. Thirty-six spare values are needed.

10.3.7.66 Traffic volume event identity

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Traffic volume event identity	MP		Enumerated(4a, 4b)	

10.3.7.67 Traffic volume measured results list

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Traffic volume measurement results	OP	1 to <maxRB>		
>RB Identity	MP		RB Identity 10.3.4.16	
>RLC Buffers Payload	OP		Enumerated(0, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2K, 4K, 8K, 16K, 32K, 64K, 128K, 256K, 512K, 1024K)	In bytes And N Kbytes = N*1024 bytes. Twelve spare values are needed.
>Average of RLC Buffer Payload	OP		Enumerated(0, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2K, 4K, 8K, 16K, 32K, 64K, 128K, 256K, 512K, 1024K)	In bytes And N Kbytes = N*1024 bytes. Twelve spare values are needed.
>Variance of RLC Buffer Payload	OP		Enumerated(0, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2K, 4K, 8K, 16K)	In bytes And N Kbytes = N*1024 bytes. Two spare values are needed.

10.3.7.68 Traffic volume measurement

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Traffic volume measurement Object	OP		Traffic volume measurement Object 10.3.7.70	
Traffic volume measurement quantity	OP		Traffic volume measurement quantity 10.3.7.71	
Traffic volume reporting quantity	OP		Traffic volume reporting quantity 10.3.7.74	
Measurement validity	OP		Measurement validity 10.3.7.51	
CHOICE *report criteria*	MP			
>Traffic volume measurement reporting criteria			Traffic volume measurement reporting criteria 10.3.7.72	
>Periodical reporting criteria			Periodical reporting criteria 10.3.7.53	
>No reporting				(no data) Chosen when this measurement only is used as additional measurement to another measurement

10.3.7.69 Traffic volume measurement event results

Contains the event result for a traffic volume measurement.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Uplink transport channel type causing the event	MP		Enumerated(DCH,RACH, USCH)	USCH is TDD only. RACH is the currently configured default in the uplink.
UL Transport Channel identity	CV-*UL-DCH/USCH*		Transport channel identity 10.3.5.18	
Traffic volume event identity	MP		Traffic volume event identity 10.3.7.66	

Condition	Explanation
UL-DCH/USCH	If IE "Uplink transport channel type" is equal to "DCH" or "USCH" (TDD only) this IE is mandatory present. Otherwise the IE is not needed.

10.3.7.70 Traffic volume measurement object

Contains the measurement object information for a traffic volume measurement.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Traffic volume measurement objects	MP	1 to <maxTrCH>		
>Uplink transport channel type	MP		Enumerated(DCH,RACH, USCH)	USCH is TDD only. RACH is the currently configured default in the uplink.
>UL Target Transport Channel ID	CV-*UL-DCH/USCH*		Transport channel identity 10.3.5.18	

Condition	Explanation
UL-DCH/USCH	If IE "Uplink transport channel type" is equal to "DCH" or "USCH" (TDD only) this IE is mandatory present. Otherwise the IE is not needed.

10.3.7.71 Traffic volume measurement quantity

Contains the measurement quantity information for a traffic volume measurement.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Measurement quantity	MP		Enumerated(RLC buffer payload, Average RLC buffer payload, Variance of RLC buffer payload)	This parameter should be ignored.
Time Interval to take an average or a variance	CV-*A/V*		Integer(20, 40, ..260, by steps of 20)	In ms

Condition	Explanation
A/V	This IE is mandatory present when "Average RLC buffer" or "Variance of RLC buffer payload" is chosen and not needed otherwise.

10.3.7.72 Traffic volume measurement reporting criteria

Contains the measurement reporting criteria information for a traffic volume measurement.

Event 4a: Transport Channel Traffic Volume [15] exceeds an absolute threshold.

Event 4b: Transport Channel Traffic Volume [15] becomes smaller than an absolute threshold.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Parameters sent for each transport channel	OP	1 to <maxTrCH>		This IE is always required, need is OP to align with ASN.1
>Uplink transport channel type	OP		Enumerated(DCH,RACH, USCH)	USCH is TDD only. RACH is the currently configured default in the uplink.
>UL Transport Channel ID	CV-*UL-DCH/USCH*		Transport channel identity 10.3.5.18	
>Parameters required for each Event	OP	1 to <maxMeasparEvent>		
>>Traffic volume event identity	MP		Traffic volume event identity 10.3.7.66	
>>Reporting Threshold	MP		Enumerated(8,16,32,64,128,256,512,1024,2K,3K,4K,6K,8K,12K,16K,24K,32K,48K,64K,96K,128K,192K,256K,384K,512K,768K)	Threshold in bytes And N Kbytes = N*1024 bytes
>>Time to trigger	OP		Time to trigger 10.3.7.64	Indicates the period of time during which the event condition has to be satisfied, before sending a Measurement Report. Time in ms
>>Pending time after trigger	OP		Integer(250, 500, 1000, 2000, 4000, 8000, 16000)	Indicates the period of time during which it is forbidden to send any new measurement reports with the same Traffic volume event identity even if the triggering condition is fulfilled. Time in milliseconds
>>Tx interruption after trigger	OP		Integer (250, 500, 1000, 2000, 4000, 8000, 16000)	Time in milliseconds. Indicates how long the UE shall block DTCH transmissions on the RACH after a measurement report is triggered.

Condition	Explanation
UL-DCH/USCH	If IE "Uplink transport channel type" is equal to "DCH" or "USCH" (TDD only) this IE is optional. Otherwise the IE is not needed.

10.3.7.73 Traffic volume measurement system information

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Traffic volume measurement identity	MD		Measurement identity 10.3.7.48	The traffic volume measurement identity has default value 4.
Traffic volume measurement object	OP		Traffic volume measurement object 10.3.7.70	
Traffic volume measurement quantity	OP		Traffic volume measurement quantity 10.3.7.71	
Traffic volume reporting quantity	OP		Traffic volume reporting quantity 10.3.7.74	
Measurement validity	OP		Measurement validity 10.3.7.51	
Measurement Reporting Mode	MP		Measurement Reporting Mode 10.3.7.49	
CHOICE *reporting criteria*	MP			
>Traffic volume measurement reporting criteria			Traffic volume measurement reporting criteria 10.3.7.72	
>Periodical reporting criteria			Periodical reporting criteria 10.3.7.53	

10.3.7.74 Traffic volume reporting quantity

Contains the reporting quantity information for a traffic volume measurement.

For all boolean types TRUE means inclusion in the report is requested.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
RLC Buffer Payload for each RB	MP		Boolean	
Average of RLC Buffer Payload for each RB	MP		Boolean	
Variance of RLC Buffer Payload for each RB	MP		Boolean	

10.3.7.75 UE internal event identity

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE internal event identity	MP		Enumerated(6a,6b,6c,6d, 6e, 6f, 6g)	

10.3.7.76 UE internal measured results

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE *mode*	MP				
>FDD					
>>UE Transmitted Power	OP		UE Transmitted Power info 10.3.7.85		
>>UE Rx-Tx report entries	OP	1 to <maxRL>			
>>>Primary CPICH info	MP		Primary CPICH info 10.3.6.60	Primary CPICH info for each cell included in the active set	
>>>UE Rx-Tx time difference type 1	MP		UE Rx-Tx time difference type 1 10.3.7.83	UE Rx-Tx time difference in chip for each RL included in the active set	
>TDD					
>>UE Transmitted Power list	OP	1 to <maxTS>		UE Transmitted Power for each used uplink timeslot in ascending timeslot number order	
>>>UE Transmitted Power	MP		UE Transmitted Power info 10.3.7.85		
>>CHOICE *TDD option*	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Applied TA	OP		Uplink Timing Advance 10.3.6.95	Uplink timing advance applied by the UE	
>>>>Extended Applied TA	OP		Extended Uplink Timing Advance 10.3.6.95a	Uplink timing advance applied by the UE	REL-7
>>>7.68 Mcps TDD					REL-7
>>>>Extended Applied TA	OP		Extended Uplink Timing Advance 10.3.6.95a	Uplink timing advance applied by the UE	REL-7
>>>1.28 Mcps TDD					REL-4
>>>>T_{ADV}	OP		T_{ADV} info 10.3.7.112		REL-4

10.3.7.77 UE internal measurement

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE internal measurement quantity	OP		UE internal measurement quantity 10.3.7.79	
UE internal reporting quantity	OP		UE internal reporting quantity 10.3.7.82	
CHOICE *report criteria*	MP			
>UE internal measurement reporting criteria			UE internal measurement reporting criteria 10.3.7.80	
>Periodical reporting criteria			Periodical reporting criteria 10.3.7.53	
>No reporting				(no data) Chosen when this measurement only is used as additional measurement to another measurement

CHOICE *report criteria*	Condition under which the given *report criteria* is chosen
UE internal measurement reporting criteria	Chosen when UE internal measurement event triggering is required
Periodical reporting criteria	Chosen when periodical reporting is required
No reporting	Chosen when this measurement only is used as additional measurement to another measurement

10.3.7.78 UE internal measurement event results

This IE contains the measurement event results that are reported to UTRAN for UE internal measurements.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE internal event identity	MP		UE internal event identity 10.3.7.75	
CHOICE *mode*	MP			
>FDD				
>Primary CPICH info	CV-*clause 1*		Primary CPICH info 10.3.6.60	
>TDD				(no data)

Condition	Explanation
Clause 1	This IE is mandatory present if the IE "UE internal event identity" is set to "6f" or "6g", otherwise the IE is not needed.

10.3.7.79 UE internal measurement quantity

The quantity the UE shall measure in case of UE internal measurement.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE *mode*	MP				
>FDD					
>>Measurement quantity	MP		Enumerated(UE Transmitted Power, UTRA Carrier RSSI, UE Rx-Tx time difference)		
>TDD					
>>Measurement quantity	MP		Enumerated(UE Transmitted Power, UTRA Carrier RSSI,		
			T_{ADV})	Measurement on Timing Advance is for 1.28 Mcps TDD	REL-4
Filter coefficient	OP		Filter coefficient 10.3.7.9	If the IE "Measurement quantity" is set to "Rx-Tx time difference" and this IE is present, the UE behaviour is unspecified.	

10.3.7.80 UE internal measurement reporting criteria

The triggering of the event-triggered reporting for a UE internal measurement. All events concerning UE internal measurements are labelled 6x where x is a, b, c…. In TDD, the events 6a - 6d are measured and reported on timeslot basis.

Event 6a: The UE Transmitted Power becomes larger than an absolute threshold

Event 6b: The UE Transmitted Power becomes less than an absolute threshold

Event 6c: The UE Transmitted Power reaches its minimum value

Event 6d: The UE Transmitted Power reaches its maximum value

Event 6e: The UE RSSI reaches the UEs dynamic receiver range

Event 6f (FDD): The UE Rx-Tx time difference for a RL included in the active set becomes larger than an absolute threshold

Event 6f (1.28 Mcps TDD): The time difference indicated by T_{ADV} becomes larger than an absolute threshold

Event 6g: The UE Rx-Tx time difference for a RL included in the active set becomes less than an absolute threshold

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Parameters sent for each UE internal measurement event	OP	1 to <maxMeasEvent>			
>UE internal event identity	MP		UE internal event identity 10.3.7.75		

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>Time-to-trigger	MP		Integer(0, 10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640, 1280, 2560, 5000)	Time in ms. Indicates the period of time between the timing of event detection and the timing of sending Measurement Report.	
>UE Transmitted Power Tx power threshold	CV-*clause 1*		Integer(-50..33)	Power in dBm. In event 6a, 6b.	
>UE Rx-Tx time difference threshold	CV-*clause 2*		Integer(768..1280)	Time difference in chip. In event 6f, 6g.	
>T_{ADV} threshold	CV-*clause 3*		Real (0..63 step 0.125)	Time difference in chip. In event 6f	REL-4

Condition	Explanation
Clause 1	The IE is mandatory present if the IE "UE internal event identity" is set to "6a" or "6b", otherwise the IE is not needed.
Clause 2	In FDD, the IE is mandatory present if the IE "UE internal event identity" is set to "6f" or "6g", otherwise the IE is not needed.
Clause 3	In 1.28 Mcps TDD the IE is mandatory present if the IE "UE internal event identity" is set to "6f", otherwise the IE is not needed.

10.3.7.81 Void

10.3.7.82 UE Internal reporting quantity

For all boolean types TRUE means inclusion in the report is requested.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
UE Transmitted Power	MP		Boolean		
CHOICE *mode*	MP				
>FDD					
>>UE Rx-Tx time difference	MP		Boolean		
>TDD					
>>CHOICE *TDD option*					REL-4
>>>3.84 Mcps TDD				(no data)	REL-4
>>>7.68 Mcps TDD				(no data)	REL-7
>>Applied TA	MP		Boolean		
>>>1.28 Mcps TDD					REL-4
>>>>T_{ADV} info	MP		Boolean		REL-4

10.3.7.83 UE Rx-Tx time difference type 1

The difference in time between the UE uplink DPCCH/DPDCH frame transmission and the first detected path (in time), of the downlink DPCH or F-DPCH frame from the measured radio link, as defined in [7]. This measurement is for FDD only.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE Rx-Tx time difference type 1	MP		Integer(768..1280)	In chips. 511 spare values are needed.

10.3.7.84 UE Rx-Tx time difference type 2

The difference in time between the UE uplink DPCCH/DPDCH frame transmission and the first detected path (in time), of the downlink DPCH or F-DPCH frame from the measured radio link, as defined in [7].

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE Rx-Tx time difference type 2	MP		Integer (0..8191)	According to [19].

10.3.7.85 UE Transmitted Power info

Information Element/Group name	Need	Multi	IE type and reference	Semantics description
UE Transmitted Power	MP		Integer (0..104)	According to UE_TX_POWER in [19] and [20]

10.3.7.86 UE positioning Ciphering info

This IE contains information for the ciphering of UE positioning assistance data broadcast in System Information.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Ciphering Key Flag	MP		Bit string(1)	
Ciphering Serial Number	MP		Integer(0..65535)	The serial number used in the DES ciphering algorithm

10.3.7.87 UE positioning Error

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Error reason	MP		Enumerated(Not Enough OTDOA Cells, Not Enough GPS Satellites, Assistance Data Missing, Not Accomplished GPS Timing Of Cell Frames, Undefined Error, Request Denied By User, Not Processed And Timeout, Reference Cell Not Serving Cell)	Note 1
GPS Additional Assistance Data Request	CV-*GPSdataMissing*		UE positioning GPS Additional Assistance Data Request 10.3.7.88a	

NOTE 1: The following table describes each value of the IE "Error reason".

Value	Indication
Not Enough OTDOA Cells	There were not enough cells to be received.
Not Enough GPS Satellites	There were not enough GPS satellites to be received.
Assistance Data Missing	UE positioning GPS assistance data missing.
Not Accomplished GPS Timing Of Cell Frames	UE was not able to accomplish the GPS timing of cell frames measurement.
Undefined Error	Undefined error.
Request Denied By User	UE positioning request denied by upper layers.
Not Processed And Timeout	UE positioning request not processed by upper layers and timeout.
Reference Cell Not Serving Cell	UE was not able to read the SFN of the reference cell.

Condition	Explanation
GPSdataMissing	The IE is optional if the IE "Error reason" is " Assistance Data Missing " and not needed otherwise.

10.3.7.88 UE positioning GPS acquisition assistance

This IE contains parameters that enable fast acquisition of the GPS signals in UE-assisted GPS positioning.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
GPS TOW msec	MP		Integer(0..6.	GPS Time of Week in

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
			048*10^{8}-1)	milliseconds rounded down to the nearest millisecond unit. It is also the time when satellite information is valid.
UTRAN GPS reference time	OP			
>UTRAN GPS timing of cell frames	MP		Integer(0 ... 2322431999 999)	GPS timing of cell frames in steps of 1 chip.
>CHOICE *mode*	OP			
>>FDD				
>>>Primary CPICH Info	MP		Primary CPICH Info 10.3.6.60	Identifies the reference cell for the GPS TOW-SFN relationship
>>TDD				
>>>cell parameters id	MP		Cell parameters id 10.3.6.9	Identifies the reference cell for the GPS TOW-SFN relationship
>SFN	MP		Integer(0..4095)	The SFN which the UTRAN GPS timing of cell frames time stamps.
Satellite information	MP	1 to <maxSat>		
>SatID	MP		Integer (0..63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
>Doppler (0th order term)	MP		Real(-5120..5117.5 by step of 2.5)	Hz
>Extra Doppler	OP			
>>Doppler (1st order term)	MP		Real (-0.966..0.483 by step of 0.023)	Hz/s
>>Doppler Uncertainty	MP		Enumerated (12.5,25,50, 100,200)	Hz. Three spare values are needed. The Doppler experienced by a stationary UE is in the range "Doppler – Doppler Uncertainty" to "Doppler + Doppler Uncertainty".
>Code Phase	MP		Integer(0..1022)	GPS chips. Increasing binary values of the field signify increasing predicted pseudoranges.
>Integer Code Phase	MP		Integer(0..19)	Number of code periods that have elapsed since the latest GPS bit boundary, in units of C/A code period.
>GPS Bit number	MP		Integer(0..3)	Specifies GPS bit number modulo 4
>Code Phase Search Window	MP		Integer(1023,1,2,3,4,6,8,12,16,24,32,48,64,96,128, 192)	Expected code-phase is in the range "Code Phase – Code Phase Search Window" to "Code Phase + Code Phase Search Window".
>Azimuth and Elevation	OP			
>>Azimuth	MP		Real(0..348.75 by step of 11.25)	Degrees An angle of x degrees means the satellite azimuth a is in the range x ≤ a < x+11.25 degrees.
>>Elevation	MP		Real(0..78.75 by step of	Degrees An angle of y degrees means

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
			11.25)	the satellite elevation e is in the range y ≤ e < y+11.25 degrees except for y=78.75 where the range is extended to include 90 degrees.

10.3.7.88a UE positioning GPS Additional Assistance Data Request

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Almanac	MP		Boolean	TRUE means requested
UTC Model	MP		Boolean	TRUE means requested
Ionospheric model	MP		Boolean	TRUE means requested
Navigation Model	MP		Boolean	TRUE means requested
DGPS Corrections	MP		Boolean	TRUE means requested
Reference Location	MP		Boolean	TRUE means requested
Reference Time	MP		Boolean	TRUE means requested
Acquisition Assistance	MP		Boolean	TRUE means requested
Real-Time Integrity	MP		Boolean	TRUE means requested
Navigation Model Additional data	CV-*Navigation Model*			this IE is present only if "Navigation Model" is set to TRUE otherwise it is absent
>GPS Week	MP		Integer (0..1023)	
>GPS_Toe	MP		Integer (0..167)	GPS time of ephemeris in hours of the latest ephemeris set contained by the UE. Eighty-eight spare values needed.
>T-Toe limit	MP		Integer (0..10)	ephemeris age tolerance of the UE to UTRAN in hours. Five spare values needed.
>Satellites list related data	MP	0 to <maxSat>		
>>SatID	MP		Integer (0..63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
>>IODE	MP		Integer (0..255)	Issue of Data Ephemeris for SatID

10.3.7.89 UE positioning GPS almanac

This IE contains a reduced-precision subset of the ephemeris and clock correction parameters.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
WN_a	MP		Bit string(8)	Almanac Reference Week [12]
Satellite information	MP	1 to <maxSat>		
>DataID	MP		Integer(0..3)	See [12]
>SatID	MP		Enumerated(0..63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
>e	MP		Bit string(16)	Eccentricity [12]
>t_{oa}	MP		Bit string(8)	Reference Time of Almanac [12]
>δi	MP		Bit string(16)	
>OMEGADOT	MP		Bit string(16)	Longitude of Ascending Node of Orbit Plane at Weekly Epoch (semi-circles/sec) [12]
>SV Health	MP		Bit string(8)	
>$A^{1/2}$	MP		Bit string(24)	Semi-Major Axis (meters)$^{1/2}$ [12]
>$OMEGA_0$	MP		Bit string(24)	Longitude of Ascending Node of Orbit Plane at Weekly Epoch (semi-circles) [12]
>M_0	MP		Bit string(24)	Mean Anomaly at Reference Time (semi-circles) [12]
>ω	MP		Bit string(24)	Argument of Perigee (semi-circles) [12]
>af_0	MP		Bit string(11)	apparent clock correction [12]
>af_1	MP		Bit string(11)	apparent clock correction [12]
SV Global Health	OP		Bit string(364)	This enables GPS time recovery and possibly extended GPS correlation intervals. It is specified in page 25 of subframes 4 and 5 [12]

10.3.7.90 UE positioning GPS assistance data

This IE contains GPS assistance data.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
UE positioning GPS reference time	OP		UE positioning GPS reference time 10.3.7.96	
UE positioning GPS reference UE position	OP		Ellipsoid point with altitude and uncertainty ellipsoid 10.3.8.4c	A priori knowledge of UE 3-D position.
UE positioning GPS DGPS corrections	OP		UE positioning GPS DGPS corrections 10.3.7.91	

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
UE positioning GPS navigation model	OP		UE positioning GPS navigation model 10.3.7.94	
UE positioning GPS ionospheric model	OP		UE positioning GPS ionospheric model 10.3.7.92	
UE positioning GPS UTC model	OP		UE positioning GPS UTC model 10.3.7.97	
UE positioning GPS almanac	OP		UE positioning GPS almanac 10.3.7.89	
UE positioning GPS acquisition assistance	OP		UE positioning GPS acquisition assistance 10.3.7.88	
UE positioning GPS real-time integrity	OP		UE positioning GPS real-time integrity 10.3.7.95	

10.3.7.90a Void

10.3.7.91 UE positioning GPS DGPS corrections

This IE contains DGPS corrections to be used by the UE.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
GPS TOW sec	MP		Integer(0..604799)	seconds GPS time-of-week when the DGPS corrections were calculated
Status/Health	MP		Enumerated(UDRE scale 1.0, UDRE scale 0.75, UDRE scale 0.5, UDRE scale 0.3, UDRE scale 0.2, UDRE scale 0.1, no data, invalid data)	
DGPS information	CV-*Status/Health*	1 to <maxSat>		If the Cipher information is included these fields are ciphered.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
>SatID	MP		Enumerated (0…63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
>IODE	MP		Integer(0..255)	
>UDRE	MP		Enumerated(UDRE ≤ 1.0 m, 1.0m < UDRE ≤ 4.0m, 4.0m < UDRE ≤ 8.0m, 8.0m < UDRE)	The value in this field shall be multiplied by the UDRE Scale Factor in the IE Status/Health to determine the final UDRE estimate for the particular satellite.
>PRC	MP		Real(-655.04..655.04 by step of 0.32)	meters (different from [13])
>RRC	MP		Real(-4.064..4.064 by step of 0.032)	meters/sec (different from [13])
>Delta PRC2	MP		Integer(-127..127)	In this version of the protocol this IE should be set to zero and the UE shall ignore it
>Delta RRC2	MP		Real(-0.224..0.224 by step of 0.032)	In this version of the protocol this IE should be set to zero and the UE shall ignore it
>Delta PRC3	OP		Integer(-127..127)	This IE should not be included in this version of the protocol and if received the UE shall ignore it
>Delta RRC3	OP		Real(-0.224..0.224 by step of 0.032)	This IE should not be included in this version of the protocol and if received the UE shall ignore it

Condition	Explanation
Status/Health	This IE is mandatory present if "status" is not equal to "no data" or "invalid data", otherwise the IE is not needed.

10.3.7.91a UE positioning GPS Ephemeris and Clock Correction parameters

This IE contains information for GPS ephemeris and clock correction.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
C/A or P on L2	MP		Bit string(2)	Code(s) on L2 Channel [12]
URA Index	MP		Bit string(4)	User Range Accuracy [12]
SV Health	MP		Bit string(6)	[12]
IODC	MP		Bit string(10)	Issue of Data, Clock [12]
L2 P Data Flag	MP		Bit string(1)	[12]
SF 1 Reserved	MP		Bit string(87)	[12]
T_{GD}	MP		Bit string(8)	Estimated group delay differential [12]
t_{oc}	MP		Bit string(16)	apparent clock correction [12]
af_2	MP		Bit string(8)	apparent clock correction [12]

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
af_1	MP		Bit string(16)	apparent clock correction [12]
af_0	MP		Bit string(22)	apparent clock correction [12]
C_{rs}	MP		Bit string(16)	Amplitude of the Sine Harmonic Correction Term to the Orbit Radius (meters) [12]
Δn	MP		Bit string(16)	Mean Motion Difference From Computed Value (semi-circles/sec) [12]
M_0	MP		Bit string(32)	Mean Anomaly at Reference Time (semi-circles) [12]
C_{uc}	MP		Bit string(16)	Amplitude of the Cosine Harmonic Correction Term To The Argument Of Latitude (radians) [12]
e	MP		Bit string(32)	c
C_{us}	MP		Bit string(16)	Amplitude of the Sine Harmonic Correction Term To The Argument Of Latitude (radians) [12]
$(A)^{1/2}$	MP		Bit string(32)	Semi-Major Axis (meters)$^{1/2}$ [12]
t_{oe}	MP		Bit string(16)	Reference Time Ephemeris [12]
Fit Interval Flag	MP		Bit string(1)	[12]
AODO	MP		Bit string(5)	Age Of Data Offset [12]
C_{ic}	MP		Bit string(16)	Amplitude of the Cosine Harmonic Correction Term To The Angle Of Inclination (radians) [12]
$OMEGA_0$	MP		Bit string(32)	Longitude of Ascending Node of Orbit Plane at Weekly Epoch (semi-circles) [12]
C_{is}	MP		Bit string(16)	Amplitude of the Sine Harmonic Correction Term To The Angle Of Inclination (radians) [12]
i_0	MP		Bit string(32)	Inclination Angle at Reference Time (semi-circles) [12]
C_{rc}	MP		Bit string(16)	Amplitude of the Cosine Harmonic Correction Term to the Orbit Radius (meters) [12]
ω	MP		Bit string(32)	Argument of Perigee (semi-circles) [12]
OMEGAdot	MP		Bit string(24)	Longitude of Ascending Node of Orbit Plane at Weekly Epoch (semi-circles/sec) [12]
Idot	MP		Bit string(14)	Rate of Inclination Angle (semi-circles/sec) [12]

10.3.7.92 UE positioning GPS ionospheric model

The IE contains fields needed to model the propagation delays of the GPS signals through the ionosphere.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
α_0	MP		Bit string(8)	Note 1
α_1	MP		Bit string(8)	Note 1
α_2	MP		Bit string(8)	Note 1
α_3	MP		Bit string(8)	Note 1
β_0	MP		Bit string(8)	Note 2
β_1	MP		Bit string(8)	Note 2
β_2	MP		Bit string(8)	Note 2
β_3	MP		Bit string(8)	Note 2

NOTE 1: The parameters αn are the coefficients of a cubic equation representing the amplitude of the vertical delay [12].

NOTE 2: The parameters βn are the coefficients of a cubic equation representing the period of the ionospheric model [12].

10.3.7.93 UE positioning GPS measured results

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
CHOICE *Reference Time*	MP			
>UTRAN reference time				
>>UE GPS timing of cell frames	MP		Integer(0..3715891199 9999	GPS Time of Week in units of 1/16th UMTS chips according to [19]. 33209832177664 spare values are needed.
>>CHOICE *mode*	MP			
>>>FDD				
>>>>Primary CPICH Info	MP		Primary CPICH Info 10.3.6.60	Identifies the reference cell for the GPS TOW-SFN relationship.
>>>TDD				
>>>>cell parameters id	MP		Cell parameters id 10.3.6.9	Identifies the reference cell for the GPS TOW-SFN relationship.
>>Reference SFN	MP		Integer(0..4095)	The SFN for which the location is valid. This IE indicates the SFN at which the UE timing of cell frames is captured.
>GPS reference time only				
>>GPS TOW msec	MP		Integer(0..6.048*10^8-1)	GPS Time of Week in milliseconds (rounded down to the nearest millisecond unit).
Measurement Parameters	MP	1 to <maxSat>		
>Satellite ID	MP		Enumerated(0..63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
>C/N$_o$	MP		Integer(0..63)	the estimate of the carrier-to-noise ratio of the received signal from the particular satellite used in the measurement. It is given in units of dB-Hz (typical levels will be in the range of 20 – 50 dB-Hz).

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
>Doppler	MP		Integer(-32768..32768)	Hz, scale factor 0.2.
>Whole GPS Chips	MP		Integer(0..1022)	Unit in GPS chips. Whole value of the UE GPS code-phase measurement, where increasing binary values of the field signify increasing measured pseudoranges.The UE GPS code-phase measurement is divided into the fields "Whole GPS Chips" and "Fractional GPS Chips".
>Fractional GPS Chips	MP		Integer(0..(2^{10}-1))	Scale factor 2^{-10} Fractional value of the UE GPS code-phase measurement.
>Multipath Indicator	MP		Enumerated(NM, low, medium, high)	Note 1.
>Pseudorange RMS Error	MP		Enumerated(range index 0..range index 63)	Note 2.

NOTE 1: The following table gives the mapping of the multipath indicator field.

Value	Multipath Indication
NM	Not measured
Low	MP error < 5m
Medium	5m < MP error < 43m
High	MP error > 43m

NOTE 2: The following table gives the bitmapping of the Pseudorange RMS Error field.

Range Index	Mantissa	Exponent	Floating-Point value, x_i	Pseudorange value, P
0	000	000	0.5	P < 0.5
1	001	000	0.5625	0.5 <= P < 0.5625
I	X	Y	$0.5 * (1 + x/8) * 2^y$	x_{i-1} <= P < x_i
62	110	111	112	104 <= P < 112
63	111	111	--	112 <= P

10.3.7.94 UE positioning GPS navigation model

This IE contain information required to manage the transfer of precise navigation data to the GPS-capable UE.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Satellite information	MP	1 to <maxSat>		
>SatID	MP		Enumerated(0..63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
>Satellite Status	MP		Enumerated(NS_NN,	NOTE

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
			ES_SN, ES_NN, REVD)	
>GPS Ephemeris and Clock Correction parameters	CV-*Satellite status*		UE positioning GPS Ephemeris and Clock Correction parameters 10.3.7.91a	

NOTE: The UE shall interpret enumerated symbols as follows.

Value	Indication
NS_NN	New satellite, new Navigation Model
ES_SN	Existing satellite, same Navigation Model
ES_NN	Existing satellite, new Navigation Model
REVD	Reserved

Condition	Explanation
Satellite status	The IE is not needed if the IE "Satellite status" is ES_SN and mandatory present otherwise.

10.3.7.95 UE positioning GPS real-time integrity

This IE contains parameters that describe the real-time status of the GPS constellation.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Satellite information	MP	1 to <maxSat>		
>BadSatID	MP		Enumerated(0..63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].

10.3.7.95a Void

10.3.7.96 UE positioning GPS reference time

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
GPS Week	MP		Integer(0..1023)	
GPS TOW msec	MP		Integer(0..6.048*10^8-1)	GPS Time of Week in milliseconds (rounded down to the nearest millisecond unit).
UTRAN GPS reference time	OP			
>UTRAN GPS timing of cell frames	MP		Integer(0..2322431999999)	UTRAN GPS timing of cell frames in steps of 1 chip
>CHOICE *mode*	OP			
>>FDD				
>>>Primary CPICH Info	MP		Primary CPICH Info 10.3.6.60	Identifies the reference cell for the GPS TOW-SFN relationship
>>TDD				

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
>>>cell parameters id	MP		Cell parameters id 10.3.6.9	Identifies the reference cell for the GPS TOW-SFN relationship
>SFN	MP		Integer(0..4095)	The SFN which the UTRAN GPS timing of cell frames time stamps.
SFN-TOW Uncertainty	OP		Enumerated (lessThan10, moreThan10)	This field indicates the uncertainty of the relation GPS TOW/SFN. lessThan10 means the relation is accurate to at least 10 ms.
$T_{UTRAN-GPS}$ drift rate	OP		Integer (0, 1, 2, 5, 10, 15, 25, 50, -1, -2, -5, -10, -15, -25, -50)	in 1/256 chips per sec.
GPS TOW Assist	OP	1 to <maxSat>		
>SatID	MP		Enumerated(0..63)	Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
>TLM Message	MP		Bit string(14)	
>TLM Reserved	MP		Bit string(2)	
>Alert	MP		Boolean	
>Anti-Spoof	MP		Boolean	

10.3.7.97 UE positioning GPS UTC model

The UTC Model field contains a set of parameters needed to relate GPS time to Universal Time Coordinate (UTC).

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
A_1	MP		Bit string(24)	sec/sec [12]
A_0	MP		Bit string(32)	seconds [12]
t_{ot}	MP		Bit string(8)	seconds [12]
WN_t	MP		Bit string(8)	weeks [12]
Δt_{LS}	MP		Bit string(8)	seconds [12]
WN_{LSF}	MP		Bit string(8)	weeks [12]
DN	MP		Bit string(8)	days [12]
Δt_{LSF}	MP		Bit string(8)	seconds [12]

10.3.7.98 UE positioning IPDL parameters

This IE contains parameters for the IPDL mode. The use of this parameters is described in [29].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
CHOICE *mode*					REL-4
>FDD					REL-4
>>IP spacing	MP		Integer(5,7,10,15,20,30,40,50)	See [29]	
>>IP length	MP		Integer(5,10)	See [29]	
>>IP offset	MP		Integer(0..9)	See [29]	
>>Seed	MP		Integer(0..63)	See [29]	
>TDD					REL-4
>>IP spacing	MP		Integer(30,40,50,70,100)	See [33]	REL-4
>>IP_Start	MP		Integer(0..40	See [33]	REL-4

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
			95)		
>>IP_Slot	MP		Integer(0..14)	See [33]	REL-4
>>IP_PCCPCH	CV-*channel*		Boolean	See [33]	REL-4
Burst mode parameters	OP				
>Burst Start	MP		Integer(0..15)	See [29] and [33]	
>Burst Length	MP		Integer(10..25)	See [29] and [33]	
>Burst freq	MP		Integer(1..16)	See [29] and [33]	

Condition	Explanation
channel	This IE is present only if the idle slot carries the PCCPCH

10.3.7.99 UE positioning measured results

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE positioning OTDOA measured results	OP		UE positioning OTDOA measured results 10.3.7.105	
UE positioning Position estimate info	OP		UE positioning Position estimate info 10.3.7.109	
UE positioning GPS measured results	OP		UE positioning GPS measured results 10.3.7.93	
UE positioning error	OP		UE positioning error 10.3.7.87	Included if UE positioning error occurred

10.3.7.100 UE positioning measurement

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UE positioning reporting quantity	MP		UE positioning reporting quantity 10.3.7.111	
Measurement validity	OP		Measurement validity 10.3.7.51	
CHOICE *reporting criteria*	MP			
>UE positioning reporting criteria			UE positioning reporting criteria 10.3.7.110	

Information Element/Group name	Need	Multi	Type and reference	Semantics description
>Periodical reporting criteria			Periodical reporting criteria 10.3.7.53	
>No reporting				(no data)
UE positioning OTDOA assistance data for UE-assisted	OP		UE positioning OTDOA assistance data for UE-assisted 10.3.7.103	
UE positioning OTDOA assistance data for UE-based	OP		UE positioning OTDOA assistance data for UE-based 10.3.7.103a	
UE positioning GPS assistance data	OP		UE positioning GPS assistance data 10.3.7.90	

10.3.7.101 UE positioning measurement event results

This IE contains the measurement event results that are reported to UTRAN for UE positioning measurements.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
CHOICE *Event ID*	MP			One spare value is needed.
>7a				
>>UE positioning Position estimate info	MP		UE positioning Position estimate info 10.3.7.109	
>7b				
>>UE positioning OTDOA measured results	MP		UE positioning OTDOA measured results 10.3.7.105	
>7c				
>>UE positioning GPS measurement	MP		UE positioning GPS measured results 10.3.7.93	

10.3.7.102 Void

10.3.7.103 UE positioning OTDOA assistance data for UE-assisted

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
UE positioning OTDOA reference cell info for UE-assisted	OP		UE positioning OTDOA reference cell info 10.3.7.108	
UE positioning OTDOA neighbour cell list for UE-assisted	OP	1 to <maxCellMeas>		
>UE positioning OTDOA neighbour cell info for UE-assisted	MP		UE positioning OTDOA neighbour cell info 10.3.7.106	

10.3.7.103a UE positioning OTDOA assistance data for UE-based

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
UE positioning OTDOA reference cell info for UE-based	OP		UE positioning OTDOA reference cell info for UE-based 10.3.7.108a	
UE positioning OTDOA neighbour cell list for UE-based	OP	1 to <maxCellMeas>		
>UE positioning OTDOA neighbour cell info for UE-based	MP		UE positioning OTDOA neighbour cell info for UE-based 10.3.7.106a	

10.3.7.104 Void

10.3.7.105 UE positioning OTDOA measured results

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
SFN	MP		Integer(0..4095)	SFN during which the last measurement was performed
CHOICE *mode*				
>FDD				
>>Reference cell id	MP		Primary CPICH info 10.3.6.60	
>>UE Rx-Tx time difference type 2 info	MP			
>>>UE Rx-Tx time difference type 2	MP		UE Rx-Tx time difference	

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
			type 2 10.3.7.84	
>>>UE positioning OTDOA quality	MP		UE positioning OTDOA quality 10.3.7.107	Quality of the UE Rx-Tx time difference type 2 measurement from the reference cell.
>TDD				(no data)
>>Reference cell id	MP		Cell parameters ID 10.3.6.9	
Neighbours	MP	0 to <maxCellMeas>		
>CHOICE *mode*	MP			
>>FDD				
>>>Neighbour Identity	MD		Primary CPICH info 10.3.6.60	Default value is the same as in the first set of multiple sets.
>>>Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information
>>>UE Rx-Tx time difference type 2 info	OP			Included for cell in the active set excluding the reference cell.
>>>>UE Rx-Tx time difference type 2	MP		UE Rx-Tx time difference type 2 10.3.7.84	
>>>>UE positioning OTDOA quality	MP		UE positioning OTDOA quality 10.3.7.107	Quality of the UE Rx-Tx time difference type 2 measurement from the neighbour cell.
>>TDD				
>>>Cell and Channel ID	MD		Cell and Channel Identity info 10.3.6.8a	Default value is the same as in the first set of multiple sets.
>UE positioning OTDOA quality	MP		UE positioning OTDOA quality 10.3.7.107	Quality of the SFN-SFN observed time difference type 2 measurement from the neighbour cell.
>SFN-SFN observed time difference type 2	MP		SFN-SFN observed time difference 10.3.7.63	Gives the timing relative to the reference cell. Only type 2 is allowed.

10.3.7.106 UE positioning OTDOA neighbour cell info

This IE gives approximate cell timing in order to decrease the search window.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
CHOICE *mode*	MP			
>FDD				
>>Primary CPICH info	MP		Primary CPICH info 10.3.6.60	
>TDD				

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
>>cell and channel ID	MP		Cell and Channel Identity info 10.3.6.8a	Identifies the channel to be measured on.
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information
IPDL parameters	CV-*IPDLs*		UE positioning IPDL parameters 10.3.7.98	
SFN offset	MP		Integer (0 .. 4095)	Although this IE is not always required, need is MP to align with ASN.1. Define Tref as the time of beginning of system frame number SFNref of the reference cell. Define Tnc as the beginning of a frame from the neighbour cell occurring immediately after the time Tref. Let the corresponding system frame number be SFNnc. Then SFNnc = SFNref-SFN offset modulo 4096.
SFN offset validity	MD		Enumerated (false)	Absence of this element means SFN offset is valid. False means SFN offset is not valid.
SFN-SFN relative time difference	MP		Integer(0.. 38399)	Gives the relative timing compared to the reference cell. Equal to $\lfloor$ (Tnc-Tref)*(3.84*10^6) $\rfloor$ where $\lfloor()\rfloor$ denotes rounding to the nearest lower integer. In chips, Tnc = the time of beginning of a system frame from the neighbour cell, Tref = the time of beginning of a system frame from the reference cell.
SFN-SFN drift	OP		Integer (0, -1, -2, -3, -4, -5, -8, -10, -15, -25, -35, -50, -65, -80, -100, 1, 2, 3, 4, 5, 8, 10, 15, 25, 35, 50, 65, 80, 100)	in 1/256 chips per second
Search Window Size	MP		Integer(20, 40, 80, 160, 320, 640, 1280, infinity)	In chips. If the value is X then the expected SFN-SFN observed time difference is in the range [RTD-X, RTD+X] where RTD is the value of the field SFN-SFN relative time difference. Infinity means that the uncertainty is larger than 1280 chips.
CHOICE *PositioningMode*	MP			
>UE based				(no data)

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
>UE assisted				(no data)

Condition	Explanation
IPDLs	This IE is mandatory present if IPDLs are applied and not needed otherwise.

10.3.7.106a UE positioning OTDOA neighbour cell info for UE-based

This IE gives approximate cell timing in order to decrease the search window, as well as the cell locations and fine cell timing for UE based OTDOA.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
UE positioning OTDOA neighbour cell info	MP		UE positioning OTDOA neighbour cell info 10.3.7.106		
Cell Position	MD			Default is the same as previous cell	
>Relative North	OP		Integer(-20000..20000)	Seconds of angle, scale factor 0.03. Relative position compared to reference cell.	
>Relative East	OP		Integer(-20000..20000)	Seconds of angle, scale factor 0.03. Relative position compared to reference cell.	
>Relative Altitude	OP		Integer(-4000..4000)	Relative altitude in meters compared to ref. cell.	
Fine SFN-SFN	MP		Real(0..0.9375 in steps of 0.0625)	Gives finer resolution	
UE positioning Relative Time Difference Quality	MP		UE positioning OTDOA quality 10.3.7.109a	Quality of the relative time difference between neighbour and reference cell.	
Round Trip Time	OP		Real (876.00 .. 2923.875 in steps of 0.0625)	In chips. Included if cell is in active set.	
Round Trip Time Extension	CV-*FDD*		Real (0 .. 4392.125 in steps of 0.0625)	In chips. Included if cell is in active set. Default = 0. NOTE.	REL-7
NOTE: Total Round Trip Time = IE "Round Trip Time" + IE "Round Trip Time Extension".					

Condition	Explanation
FDD	The IE is optionally present in FDD, otherwise it is not needed.

10.3.7.107 UE positioning OTDOA quality

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Std Resolution	MP		Bit string(2)	Std Resolution field includes the resolution used in Std of OTDOA Measurements field. Encoding on two bits as

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
				follows: '00' 10 meters '01' 20 meters '10' 30 meters '11' Reserved
Number of OTDOA Measurements	MP		Bit string(3)	The 'Number of OTDOA measurements' field indicates how many OTDOA measurements have been used in the UE to determine the sample standard deviation of the measurements. Following 3 bit encoding is used: '001' 5-9 '010' 10-14 '011' 15-24 '100' 25-34 '101' 35-44 '110' 45-54 '111' 55 or more Special case: '000':In this case the field 'Std of OTDOA measurements' contains the std of the reported SFN-SFN otd value = $\sqrt{E[(x-\mu)^2]}$, where x is the reported value and $\mu = E[x]$ is the expectation value (i.e. the true value) of x. This std can be used irrespective of the number of measurements and reporting of the number of measurements is not needed. Also other measurements such as Ec/No or Rx levels can be utilised in this case to evaluate the 'Std of OTDOA measurements' reported in this IE.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Std of OTDOA Measurements	MP		Bit string(5)	Std of OTDOA Measurements field includes sample standard deviation of OTDOA measurements (when number of measurements is reported in 'Number of OTDOA measurements field') or standard deviation of the reported SFN-SFN otd value = $\sqrt{E[(x-\mu)^2]}$, where x is the reported value and $\mu = E[x]$ is the expectation value (i.e. the true value) of x (when '000' is given in 'Number of OTDOA measurements' field). Following linear 5 bit encoding is used: '00000' 0 - (R*1-1) meters '00001' R*1 – (R*2-1) meters '00010' R*2 – (R*3-1) meters … '11111' R*31 meters or more where R is the resolution defined by Std Resolution field. E.g. R=20 m corresponds to 0-19 m, 20-39 m,…,620+ m.

10.3.7.108 UE positioning OTDOA reference cell info

This IE defines the cell used for time references in all OTDOA measurements.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
SFN	OP		Integer (0..4095)	Time stamp (SFN of Reference Cell) of the SFN-SFN relative time differences and SFN-SFN drift rates. Included if any SFN-SFN drift value is included in IE UE positioning OTDOA neighbour cell info.
CHOICE *mode*	MP			
>FDD				
>>Primary CPICH info	MP		Primary CPICH info 10.3.6.60	
>TDD				
>>cell and channel ID	MP		Cell and Channel Identity info 10.3.6.8a	Identifies the channel to be measured on.
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information. This IE shall always be set to default value
CHOICE *PositioningMode*	MP			
>UE based				
>UE assisted				(no data)
IPDL parameters	OP		UE positioning IPDL parameters 10.3.7.98	If this element is not included there are no idle periods present

10.3.7.108a UE positioning OTDOA reference cell info for UE-based

This IE defines the cell used for time references in all OTDOA measurements for UE-based methods.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
UE positioning OTDOA reference cell info	MP		UE positioning OTDOA reference cell info 10.3.7.108		
CHOICE *Cell Position*	OP			The position of the antenna that defines the cell. Used for the UE based method.	
>Ellipsoid					
>>Ellipsoid point	MP		Ellipsoid point 10.3.8.4a		
>Ellipsoid with altitude					
>>Ellipsoid point with altitude	MP		Ellipsoid point with altitude 10.3.8.4b		
Round Trip Time	OP		Real (876.00 .. 2923.875 in steps of 0.0625)	In chips.	
Round Trip Time Extension	CV-*FDD*		Real (0 .. 4392.125 in steps of 0.0625)	In chips. Default = 0. NOTE.	REL-7
NOTE: Total Round Trip Time = IE "Round Trip Time" + IE "Round Trip Time Extension".					

Condition	Explanation
FDD	The IE is optionally present in FDD, otherwise it is not needed.

10.3.7.109 UE positioning position estimate info

The purpose of this IE is to provide the position estimate from the UE to the network, if the UE is capable of determining its own position.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
CHOICE *Reference Time*	MP				
>UTRAN GPS reference time					
>>UE GPS timing of cell frames	MP		Integer(0.. 3715891199 9999)	GPS Time of Week in units of 1/16th UMTS chips according to [19]. 33209832177664 spare values are needed.	
>>CHOICE *mode*	MP				
>>>FDD					
>>>>Primary CPICH Info	MP		Primary CPICH Info 10.3.6.60	Identifies the reference cell for the GPS TOW-SFN relationship	
>>>TDD					
>>cell parameters id	MP		Cell parameters id 10.3.6.9	Identifies the reference cell for the GPS TOW-SFN relationship.	
>>Reference SFN	MP		Integer(0..4095)	The SFN for which the location is valid. This IE indicates the SFN at which the UE timing of cell frame is captured.	
>GPS reference time only					

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
>>GPS TOW msec	MP		Integer(0..6.048*10^8-1)	GPS Time of Week in milliseconds (rounded down to the nearest millisecond unit).	
>Cell timing					
>>SFN	MP		Integer(0..4095)	SFN during which the position was calculated.	
>>CHOICE *mode*	MP				
>>>FDD					
>>>>Primary CPICH Info	MP		Primary CPICH Info 10.3.6.60	Identifies the reference cell for SFN	
>>>TDD					
>>cell parameters id	MP		Cell parameters id 10.3.6.9	Identifies reference cell for SFN	
CHOICE *Position estimate*	MP				
>Ellipsoid Point			Ellipsoid Point; 10.3.8.4a		
>Ellipsoid point with uncertainty circle			Ellipsoid point with uncertainty circle 10.3.8.4d		
>Ellipsoid point with uncertainty ellipse			Ellipsoid point with uncertainty ellipse 10.3.8.4e		
>Ellipsoid point with altitude			Ellipsoid point with altitude 10.3.8.4b		
>Ellipsoid point with altitude and uncertainty ellipsoid			Ellipsoid point with altitude and uncertainty ellipsoid 10.3.8.4c		
CHOICE *Velocity estimate*	OP				REL-7
>Horizontal Velocity			Horizontal Velocity 10.3.8.4h		REL-7
>Horizontal with Vertical Velocity			Horizontal with Vertical Velocity 10.3.8.4i		REL-7
>Horizontal Velocity with Uncertainty			Horizontal Velocity with Uncertainty 10.3.8.4j		REL-7
>Horizontal with Vertical Velocity and Uncertainty			Horizontal with Vertical Velocity and Uncertainty 10.3.8.4k		REL-7

10.3.7.109a UE positioning Relative Time Difference quality

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Relative Time Difference Std Resolution	MP		Bit string(2)	Std Resolution field includes the resolution used in Std of Relative Time Difference field. Encoding on two bits as follows: '00' 10 meters '01' 20 meters '10' 30 meters '11' Reserved
Std of Relative Time Difference	MP		Bit string(5)	Std of Relative Time difference field includes standard deviation of (SFN-SFN relative time difference + Fine SFN-SFN). Following linear 5 bit encoding is used: '00000' 0 - (R*1-1) meters '00001' R*1 – (R*2-1) meters '00010' R*2 – (R*3-1) meters … '11111' R*31 meters or more where R is the resolution defined by Std Resolution field. E.g. R=20 m corresponds to 0-19 m, 20-39 m,…,620+ m.

10.3.7.110 UE positioning reporting criteria

The triggering of the event-triggered reporting for a UE positioning measurement.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Parameters required for each event	OP	1 to <maxMeasEvent>		
>Amount of reporting	MP		Integer(1, 2, 4, 8, 16, 32, 64,infinite)	
>Report first fix	MP		Boolean	If true the UE reports the position once the measurement control is received, and then each time an event is triggered.
>Measurement interval	MP		Integer(5,15, 60,300,900,1800,3600,7200)	Indicates how often the UE should make the measurement In seconds
>CHOICE *Event ID*	MP			
>>7a				
>>>Threshold Position Change	MP		Integer(10,20,30,40,50,100,200,300,500,1000,2000,5000,10000,20000,50000,100000)	Meters. Indicated how much the position should change compared to last reported position fix in order to trigger the event.
>>7b				
>>>Threshold SFN-SFN change	MP		Real(0.25,0.5,1,2,3,4,5,10,20,50,100, 200,500,1000,2000,5000)	Chips. Indicates how much the SFN-SFN measurement of ANY measured cell is allowed to change before the event is triggered.
>>7c				
>>>Threshold SFN-GPS TOW	MP		Integer(1,2,3,5,10,20,50,100)	Time in ms. When the GPS TOW and SFN timer has drifted apart more than the specified value the event is triggered.

10.3.7.111 UE positioning reporting quantity

The purpose of the element is to express the allowed/required location method(s), and to provide information desired QoS.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
Method Type	MP		Enumerated(UE assisted, UE based, UE based is preferred but UE assisted is allowed, UE assisted is preferred but UE based is allowed)		
Positioning Methods	MP		Enumerated(OTDOA, GPS, OTDOA or GPS, Cell ID)		
Response Time	MP		Integer(1,2,4	This IE shall be ignored.	

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
			, 8, 16, 32, 64, 128)		
Horizontal Accuracy	CV-*MethodType*		Bit string(7)	The uncertainty is derived from the "uncertainty code" k by $r = 10*(1.1^k-1)$ in meters.	
Vertical Accuracy	CV-*MethodType*		Bit string(7)	The uncertainty is derived from the "uncertainty code" k by $r = 45*(1.025^k-1)$ in meters.	
GPS timing of Cell wanted	MP		Boolean	If true the SRNC wants the UE to report the SFN-GPS timing of the reference cell. This is however optional in the UE.	
Multiple Sets	MP		Boolean	This IE shall be ignored.	
Additional Assistance Data Request	MP		Boolean	TRUE indicates that the UE is requested to send the IE "Additional assistance Data Request" when the IE "UE positioning Error" is present in the UE positioning measured results. FALSE indicates that the UE shall use the assistance data available.	
Environment Characterisation	OP		Enumerated(possibly heavy multipath and NLOS conditions, no or light multipath and usually LOS conditions, not defined or mixed environment)	One spare value is needed.	
Velocity Requested	OP		Enumerated(requested)	If this element is present the UE is requested to send a velocity estimate	REL-7

Condition	Explanation
Method Type	The IE is optional if the IE "Method Type" is "UE assisted"; otherwise it is mandatory present.

10.3.7.112 T_{ADV} info

NOTE: Only for 1.28 Mcps TDD.

T_{ADV} indicates the difference between the Rx timing and Tx timing of a UE.

Information Element/group name	Need	Multi	Type and reference	Semantics description	Version
T_{ADV}	MP		Integer (0..2047)	As defined in [20].	REL-4
SFN	MP		Integer(0..4095)	SFN during which the T_{ADV} measurement was performed.	REL-4

IPR2025-00221 Exhibit 2007

10.3.8 Other Information elements

10.3.8.1 BCCH modification info

Indicates modification of the System Information on BCCH.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
MIB Value tag	MP		MIB Value tag 10.3.8.9	
BCCH modification time	OP		Integer (0.. 4088 in step of 8)	All SFN values in which MIB may be mapped are allowed.

10.3.8.2 BSIC

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Base transceiver Station Identity Code (BSIC)	MP			[11]
>Network Colour Code (NCC)	MP		bit string(3)	The first/leftmost bit of the bit string contains the most significant bit of the NCC.
>Base Station Colour Code (BCC)	MP		bit string(3)	The first/leftmost bit of the bit string contains the most significant bit of the BCC.

10.3.8.3 CBS DRX Level 1 information

This information element contains the CBS discontinuous reception information to be broadcast for CBS DRX Level 1 calculations in the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Period of CTCH allocation (N)	MP		Integer (1..256)	$M_{TTI} \leq N \leq 256$, N multiple of M_{TTI}	
CBS frame offset (K)	MP		Integer (0..255)	$0 \leq K \leq N-1$, K multiple of M_{TTI}	
Period of BMC scheduling messages (P)	CV-*SIB5*		Integer (8, 16, 32, 64, 128, 256)		REL-6

Condition	Explanation
SIB5	The IE is optional when the IE "CBS DRX Level 1 information" in SIB5, otherwise the IE is not needed

10.3.8.4 Cell Value tag

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Cell Value tag	MP		Integer (1..4)	

10.3.8.4a Ellipsoid point

This IE contains the description of an ellipsoid point as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Latitude sign	MP		Enumerated (North, South)	
Degrees Of Latitude	MP		Integer ($0...2^{23}-1$)	The IE value (N) is derived by this formula: $N \leq 2^{23} X/90 < N+1$ X being the latitude in degree (0°.. 90°)
Degrees Of Longitude	MP		Integer ($-2^{23}...2^{23}-1$)	The IE value (N) is derived by this formula: $N \leq 2^{24} X/360 < N+1$ X being the longitude in degree (-180°..+180°)

10.3.8.4b Ellipsoid point with Altitude

This IE contains the description of an ellipsoid point with altitude as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Latitude sign	MP		Enumerated (North, South)	
Degrees Of Latitude	MP		Integer ($0...2^{23}-1$)	The IE value (N) is derived by this formula: $N \leq 2^{23} X/90 < N+1$ X being the latitude in degree (0°.. 90°)
Degrees Of Longitude	MP		Integer ($-2^{23}...2^{23}-1$)	The IE value (N) is derived by this formula: $N \leq 2^{24} X/360 < N+1$ X being the longitude in degree (-180°..+180°)
Altitude Direction	MP		Enumerated (Height, Depth)	
Altitude	MP		Integer ($0..2^{15}-1$)	The IE value (N) is derived by this formula: $N \leq a < N+1$ a being the altitude in metres

10.3.8.4c Ellipsoid point with Altitude and uncertainty ellipsoid

This IE contains the description of an ellipsoid point with altitude and uncertainty ellipsoid as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Latitude sign	MP		Enumerated (North, South)	
Degrees Of Latitude	MP		Integer ($0...2^{23}-1$)	The IE value (N) is derived by this formula: $N \leq 2^{23} X/90 < N+1$ X being the latitude in degree (0°.. 90°)

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Degrees Of Longitude	MP		Integer (-2^{23}...2^{23}-1)	The IE value (*N*) is derived by this formula: $N \leq 2^{24} X/360 < N+1$ *X* being the longitude in degree (-180°..+180°)
Altitude Direction	MP		Enumerated (Height, Depth)	
Altitude	MP		Integer (0..2^{15}-1)	The IE value (*N*) is derived by this formula: $N \leq a < N+1$ *a* being the altitude in metres
Uncertainty semi-major	MP		Integer (0...127)	The uncertainty *r* is derived from the "uncertainty code" *k* by $r = 10x(1.1^k-1)$
Uncertainty semi-minor	MP		Integer (0...127)	The uncertainty *r* is derived from the "uncertainty code" *k* by $r = 10x(1.1^k-1)$
Orientation of major axis	MP		Integer (0..89)	The IE value (*N*) is derived by this formula: $2N \leq a < 2(N+1)$ *a* being the orientation in degree (0°.. 179°)
Uncertainty Altitude	MP		Integer(0..127)	The uncertainty in altitude, h, expressed in metres is mapped from the IE value (*K*), with the following formula: $h = C\left((1+x)^K - 1\right)$ with $C = 45$ and $x = 0.025$.
Confidence	MP		Integer (0..100)	in percentage

10.3.8.4d Ellipsoid point with uncertainty Circle

This IE contains the description of an ellipsoid point with an uncertainty circle as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Latitude sign	MP		Enumerated (North, South)	
Degrees Of Latitude	MP		Integer (0...2^{23}-1)	The IE value (N) is derived by this formula: $N \leq 2^{23} X/90 < N+1$ *X* being the latitude in degree (0°.. 90°)
Degrees Of Longitude	MP		Integer (-2^{23}...2^{23}-1)	The IE value (*N*) is derived by this formula: $N \leq 2^{24} X/360 < N+1$ *X* being the longitude in degree (-180°..+180°)
Uncertainty Code	MP		Integer (0...127)	The uncertainty *r* is derived from the "uncertainty code" *k* by $r = 10x(1.1^k-1)$

10.3.8.4e Ellipsoid point with uncertainty Ellipse

This IE contains the description of an ellipsoid point with an uncertainty ellipse as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Latitude sign	MP		Enumerated (North, South)	
Degrees Of Latitude	MP		Integer $(0...2^{23}-1)$	The IE value (N) is derived by this formula: $N \leq 2^{23} X/90 < N+1$ X being the latitude in degree (0°.. 90°)
Degrees Of Longitude	MP		Integer $(-2^{23}...2^{23}-1)$	The IE value (N) is derived by this formula: $N \leq 2^{24} X/360 < N+1$ X being the longitude in degree (-180°..+180°)
Uncertainty semi-major	MP		Integer (0...127)	The uncertainty r is derived from the "uncertainty code" k by $r = 10x(1.1^k-1)$
Uncertainty semi-minor	MP		Integer (0...127)	The uncertainty r is derived from the "uncertainty code" k by $r = 10x(1.1^k-1)$
Orientation of major axis	MP		Integer (0..89)	The IE value (N) is derived by this formula: $2N \leq a < 2(N+1)$ a being the orientation in degree (0°.. 179°)
Confidence	MP		Integer (0..100)	in percentage

10.3.8.4f GERAN system information

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>>> GERAN System Info	MP	1 to <maxGERAN SI>			REL-5
>>>> GERAN system info block	MP		Octet string(1..23)	The first octet contains octet 1 of the GERAN system information block, the second octet contains octet 2 of the GERAN system information block and so on.	REL-5

10.3.8.4g GSM Target Cell Info

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
GSM Target Cell Info List	MP	1 to <maxGSMTargetCells>			REL-6
>BCCH ARFCN	MP		Integer (0..1023)	[45]	REL-6
>Band indicator	MP		Enumerated	Indicates how to	REL-6

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			(DCS 1800 band used, PCS 1900 band used)	interpret the BCCH ARFCN	
>BSIC	OP		BSIC 10.3.8.2		REL-6

10.3.8.4h Horizontal Velocity

This IE contains the description of a horizontal velocity as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Bearing	MP		Integer (0...359)	The direction of movement is given in degrees where '0' represents North, '90' represents East, etc.
Horizontal Speed	MP		Integer ($0...2^{11}-1$)	The relationship between (N) and the horizontal speed (h) in kilometers per hour it describes is: $N \le h < N + 0.5$, for (N=0) $N-0.5 \le h < N + 0.5$, for ($0<N<2^{11}-1$) $N - 0.5 \le h$, for ($N = 2^{11}-1$)

10.3.8.4i Horizontal with Vertical Velocity

This IE contains the description of horizontal with vertical velocity as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Vertical Speed direction	MP		ENUMERATED (upward, downward)	
Bearing	MP		Integer (0...359)	The direction of movement is given in degrees where '0' represents North, '90' represents East, etc.
Horizontal Speed	MP		Integer ($0...2^{11}-1$)	The relationship between (N) and the horizontal speed (h) in kilometers per hour it describes is: $N \le h < N + 0.5$, for (N=0) $N-0.5 \le h < N + 0.5$, for ($0<N<2^{11}-1$) $N - 0.5 \le h$, for ($N = 2^{11}-1$)
Vertical Speed	MP		Integer (0..255)	The relationship between (N) and the vertical speed (v) in kilometres per hour it describes is given by the formula: $N \le v < N + 0.5$, for (N=0) $N-0.5 \le v < N + 0.5$, for ($0<N<2^{8}-1$) $N - 0.5 \le v$, for ($N = 2^{8}-1$)

10.3.8.4j Horizontal Velocity with Uncertainty

This IE contains the description of horizontal velocity with uncertainty as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Bearing	MP		Integer (0...359)	The direction of movement is given in degrees where '0' represents North, '90' represents East, etc.
Horizontal Speed	MP		Integer ($0...2^{11}-1$)	The relationship between (N) and the horizontal speed (h) in kilometers per hour it describes is: $N \le h < N + 0.5$, for (N=0) $N-0.5 \le h < N + 0.5$, for ($0<N<2^{11}-1$) $N - 0.5 \le h$, for ($N = 2^{11}-1$)
Horizontal Uncertainty Speed	MP		Integer (0..255)	The IE value is encoded in increments of 1 kilometer per hour. The value of N give the uncertainty speed except for N=255 which indicates that the uncertainty is not specified

10.3.8.4k Horizontal with Vertical Velocity and Uncertainty

This IE contains the description of horizontal with vertical velocity and uncertainty as in [24].

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Vertical Speed direction	MP		ENUMERATED (upward, downward)	
Bearing	MP		Integer (0...359)	The direction of movement is given in degrees where '0' represents North, '90' represents East, etc.
Horizontal Speed	MP		Integer ($0...2^{11}-1$)	The relationship between (N) and the horizontal speed (h) in kilometers per hour it describes is: $N \le h < N + 0.5$, for (N=0) $N-0.5 \le h < N + 0.5$, for ($0<N<2^{11}-1$) $N - 0.5 \le h$, for ($N = 2^{11}-1$)
Vertical Speed	MP		Integer (0..255)	The relationship between (N) and the vertical speed (v) in kilometres per hour it describes is given by the formula: $N \le v < N + 0.5$, for (N=0) $N-0.5 \le v < N + 0.5$, for ($0<N<2^{8}-1$) $N - 0.5 \le v$, for ($N = 2^{8}-1$)
Horizontal Uncertainty Speed	MP		Integer (0..255)	The IE value is encoded in increments of 1 kilometer per hour. The value of N give the uncertainty speed except for N=255 which indicates that the uncertainty is not specified

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
Vertical Uncertainty Speed	MP		Integer (0..255)	The IE value is encoded in increments of 1 kilometer per hour. The value of N give the uncertainty speed except for N=255 which indicates that the uncertainty is not specified

10.3.8.5 Inter-RAT change failure

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Inter-RAT change failure cause	MP		Enumerated(Configuration unacceptable, physical channel failure, protocol error, unspecified)	Four spare values are needed.
Protocol error information	CV-*ProtErr*		Protocol error information 10.3.8.12	

Condition	Explanation
ProtErr	The IE is mandatory present if the IE "Inter-RAT change failure cause" has the value "Protocol error" and not needed otherwise.

10.3.8.6 Inter-RAT handover failure

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Inter-RAT handover failure cause	MD		Enumerated(Configuration unacceptable, physical channel failure, protocol error, inter-RAT protocol error, unspecified)	Default value is "unspecified". Eleven spare values are needed.
Protocol error information	CV-*ProtErr*		Protocol error information 10.3.8.12	

Condition	Explanation
ProtErr	The IE is mandatory present if the IE "Inter-RAT handover failure cause" has the value "Protocol error" and not needed otherwise.

10.3.8.7 Inter-RAT UE radio access capability

This Information Element contains the inter-RAT UE radio access capability that is structured and coded according to the specification used for the corresponding system type.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE *system*	MP				
>GSM					
>>Mobile Station Classmark 2	MP		Octet string (5)	This IE is formatted as 'TLV' and is coded in the same way as the *Mobile Station Classmark 2* information element in [5]. The first octet is the *Mobile station classmark 2 IEI* and its value shall be set to 33H. The second octet is the *Length of mobile station classmark 2* and its value shall be set to 3. The octet 3 contains the first octet of the value part of the *Mobile Station Classmark 2* information element, the octet 4 contains the second octet of the value part of the *Mobile Station Classmark 2* information element and so on. For each of these octets, the first/ leftmost/ most significant bit of the octet contains b8 of the corresponding octet of the *Mobile Station Classmark 2*. In this version of the protocol the first two octets of the Mobile Station Classmark 2 IE containing the *Mobile station classmark 2 IEI* and the *Length of mobile station classmark 2 contents* should be ignored by the receiver.	
>>Mobile Station Classmark 3	MP		Octet string (1..32)	This IE is formatted as 'V' and is coded in the same way as the value part in the *Mobile station classmark 3* information element in [5]. The first octet contains octet 1 of the value part of *Mobile station classmark 3*, the second octet contains octet 2 of the value part of *Mobile station classmark 3* and so on.	

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
				See NOTE 1.	
>>MS Radio Access Capability	OP		Octet string (1..64)	This IE is formatted as 'V' and is coded in the same way as the value part in the *MS Radio Access Capability* information element in [5].	REL-6
>GERAN Iu					REL-5
>>MS GERAN Iu mode Radio Access Capability	MP		Bit string (1..170)	Formatted and coded according to [53]. The first/leftmost/most significant bit of the bit string contains bit 8 of the first octet of the IE.	REL-5
>cdma2000					
>>cdma2000Message	MP	1.to.<maxInterSysMessages>			
>>>MSG_TYPE(s)	MP		Bit string (8)	Formatted and coded according to cdma2000 specifications. The first/leftmost/most significant bit of the bit string contains bit 7 of the MSG_TYPE.	
>>>cdma2000Messagepayload(s)	MP		Bit string (1..512)	Formatted and coded according to cdma2000 specifications. The first/leftmost/most significant bit of the bit string contains bit 7 of the first octet of the cdma2000 message.	

NOTE 1: The value part is specified by means of CSN.1, which encoding results in a bit string, to which final padding may be appended upto the next octet boundary [5]. The first/ leftmost bit of the CSN.1 bit string is placed in the first/ leftmost/ most significant bit of the first octet. This continues until the last bit of the CSN.1 bit string, which is placed in the last/ rightmost/ least significant bit of the last octet.

10.3.8.8 Void

10.3.8.8a Inter-RAT UE security capability

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE *system*	MP				
>GSM					
>>GSM security capability	MP			The value TRUE means that the indicated ciphering algorithm is supported.	
>>>A5/7 supported	MP		Boolean		
>>>A5/6 supported	MP		Boolean		
>>>A5/5 supported	MP		Boolean		
>>>A5/4 supported	MP		Boolean		
>>>A5/3 supported	MP		Boolean		
>>>A5/2 supported	MP		Boolean		
>>>A5/1 supported	MP		Boolean		

10.3.8.9 MIB Value tag

Information Element/Group name	Need	Multi	Type and reference	Semantics description
MIB Value tag	MP		Integer (1..8)	

10.3.8.10 PLMN Value tag

Information Element/Group name	Need	Multi	Type and reference	Semantics description
PLMN Value tag	MP		Integer (1..256)	

10.3.8.10a PNBSCH allocation

UTRAN may use this IE to provide silent periods in the cell that may be used for cell synchronisation purposes.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Number of repetitions per SFN period	MP		Integer(2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16, 18, 20, 24, 28, 32, 36, 40, 48, 56, 64, 72, 80)		REL-4

10.3.8.11 Predefined configuration identity and value tag

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Predefined configuration identity	MP		Predefined configuration identity 10.3.4.5	
Predefined configuration value tag	MP		Predefined configuration value tag 10.3.4.6	

10.3.8.12 Protocol error information

This information element contains diagnostics information returned by the receiver of a message that was not completely understood.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
CHOICE *diagnostics type*	MP			One spare value is needed.
>Protocol error cause			Protocol error cause 10.3.3.26	

10.3.8.13 References to other system information blocks

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
References to other system information blocks	MP	1 to <maxSIB>		System information blocks for which multiple occurrences are used, may appear more than once in this list	
>Scheduling information	MP		Scheduling information, 10.3.8.16		
>SIB type SIBs only	MP		SIB Type SIBs only, 10.3.8.22		
References to other extension system information blocks	OP	1 to <maxSIB>			REL-6
>Scheduling information	MP		Scheduling information, 10.3.8.16		REL-6
>Extension SIB type	MP		SIB type extension 10.3.8.18b		REL-6

10.3.8.14 References to other system information blocks and scheduling blocks

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
References to other system information blocks	MP	1 to <maxSIB>		System information blocks for which multiple occurrences are used, may appear more than once in this list	
>Scheduling information	MP		Scheduling information, 10.3.8.16		
>SIB and SB type	MP		SIB and SB Type, 10.3.8.18a		
References to other extension system information blocks	OP	1 to <maxSIB>			REL-6
>Scheduling information	MP		Scheduling information, 10.3.8.16		REL-6
>Extension SIB type	MP		SIB type extension 10.3.8.18b		REL-6

10.3.8.15 Rplmn information

Contains information to provide faster RPLMN selection in the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
GSM BA Range	OP	1 to maxNumGSMFreqRanges		GSM BA Range	
>GSM Lower Range (UARFCN)	MP		Integer(0..16383)	Lower bound for range of GSM BA freqs	
>GSM Upper Range (UARFCN)	MP		Integer(0..16383)	Upper bound for range of GSM BA freqs	
FDD UMTS Frequency list	OP	1 to maxNumFDDFreqs			
>UARFCN (Nlow)	MP		Integer(0..16383)	[21]	
>UARFCN (Nupper)	OP		Integer(0..16383)	[21] This IE is only needed when the FDD frequency list is specifying a range.	
3.84 Mcps TDD UMTS Frequency list	OP	1 to maxNumTDDFreqs			
>UARFCN	MP		Integer(0..16383)	[22]	
7.68 Mcps TDD UMTS Frequency list	OP	1 to maxNumTDDFreqs			REL-7
>UARFCN	MP		Integer(0..16383)	[22]	REL-7
1.28 Mcps TDD UMTS Frequency list	OP	1 to maxNumTDDFreqs			REL-4
>UARFCN	MP		Integer(0..16383)	[22]	REL-4
CDMA2000 UMTS Frequency list	OP	1 to maxNumCDMA200Freqs			
>BAND_CLASS	MP		Bit string(5 bits)	TIA/EIA/IS-2000 When mapping the BAND_CLASS to the bit string, the first/leftmost bit of the bit string contains the most significant bit..	
>CDMA_FREQ	MP		Bit string (11 bits)	TIA/EIA/IS-2000 When mapping the CDMA_FREQ to the bit string, the first/leftmost bit of the bit string contains the most significant bit..	

10.3.8.16 Scheduling information

Information Element/Group name	Need	Multi	Type and reference	Semantics description
CHOICE *Value tag*	OP			
>PLMN Value tag			PLMN Value tag 10.3.8.10	This IE is included if the following conditions are fulfilled: the SIB type equals system information block type 1
>Predefined configuration identity and value tag			Predefined configuration identity and value tag 10.3.8.11	This IE is included if the following conditions are fulfilled: the SIB type equals system information block type 16
>Cell Value tag			Cell Value tag 10.3.8.4	This IE is included if the following conditions are fulfilled: the area scope for the system information block is set to "cell" in table 8.1.1. a value tag is used to indicate changes in the system information block.
>SIB occurrence identity and value tag			SIB occurrence identity and value tag 10.3.8.20b	This IE is included if the following conditions are fulfilled: the SIB type equals system information block types 15.2 and 15.3
Scheduling	MP			
>SEG_COUNT	MD		SEG COUNT 10.3.8.17	Default value is 1
>SIB_REP	MP		Integer (4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096)	Repetition period for the SIB in frames
>SIB_POS	MP		Integer (0 ..Rep-2 by step of 2)	Position of the first segment Rep is the value of the SIB_REP IE
>SIB_POS offset info	MD	1..15		see below for default value
>>SIB_OFF	MP		Integer(2..32 by step of 2)	Offset of subsequent segments

Field	Default value
SIB_POS offset info	The default value is that all segments are consecutive, i.e., that the SIB_OFF = 2 for all segments except when MIB segment/complete MIB is scheduled to be transmitted in between segments from same SIB. In that case, SIB_OFF=4 in between segments which are scheduled to be transmitted at SFNprime = 8 *n-2 and 8*n + 2, and SIB_OFF=2 for the rest of the segments.

10.3.8.17 SEG COUNT

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SEG_COUNT	MP		Integer (1..16)	Number of segments in the system information block

10.3.8.18 Segment index

Each system information segment has an individual segment index.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Segment index	MP		Integer (1..15)	Segments of a system information block are numbered starting with 0 for the first segment and 1 for the next segment, which can be the first subsequent segment or a last segment.

10.3.8.18a SIB and SB type

The SIB type identifies a specific system information block.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB and SB type	MP		Enumerated, see below	Two spare values are needed

List of enumerated values	Version
System Information Type 1, System Information Type 2, System Information Type 3, System Information Type 4, System Information Type 5, System Information Type 6, System Information Type 7, System Information Type 11, System Information Type 12, System Information Type 13, System Information Type 13.1, System Information Type 13.2, System Information Type 13.3, System Information Type 13.4, System Information Type 14, System Information Type 15, System Information Type 15.1, System Information Type 15.2, System Information Type 15.3, System Information Type 15.4, System Information Type 15.5, System Information Type 16, System Information Type 17, System Information Type 18, Scheduling Block 1, Scheduling Block 2,	
System Information Type 5bis	REL-6

10.3.8.18b SIB type extension

The SIB type identifies a specific extension system information block.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB type extension	MP		Enumerated, see below	Seven spare values are needed

List of enumerated values	Version
System Information Type 11bis	REL-6

10.3.8.19 SIB data fixed

Contains the result of a master information block or a system information block after encoding and segmentation. The IE is used for segments with fixed length (segments filling an entire transport block).

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB data fixed	MP		Bit string (222)	The first bit contains the first bit of the segment.

10.3.8.20 SIB data variable

Contains either a complete system information block or a segment of a system information block. Contains the result of a master information block or a system information block after encoding and segmentation. The IE is used for segments with variable length. The system information blocks are defined in clauses10.2.48.8.1 to10.2.48.8.18.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB data variable	MP		Bit string (1..214)	The first bit contains the first bit of the segment.

10.3.8.20a SIB occurrence identity

This information element identifies a SIB occurrence for System Information Block types 15.2 and 15.3. For System Information Block type 15.2, this identity is assigned to the visible satellite only. Unused identities are claimed by newly rising satellites.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB occurrence identity	MP		Integer (0..15)	

10.3.8.20b SIB occurrence identity and value tag

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB occurrence identity	MP		SIB occurrence identity 10.3.8.20a	
SIB occurrence value tag	MP		SIB occurrence value tag 10.3.8.20c	

10.3.8.20c SIB occurrence value tag

This information element is used to identify different versions of SIB occurrence for System Information Block types 15.2 and 15.3.

Information Element/Group name	Need	Multi	Type and Reference	Semantics description
SIB occurrence value tag	MP		Integer(0..15)	

10.3.8.21 SIB type

The SIB type identifies a specific system information block.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB type	MP		Enumerated, see below	No spare value is needed

List of enumerated values	Version
Master information block, System Information Type 1, System Information Type 2, System Information Type 3, System Information Type 4, System Information Type 5, System Information Type 6, System Information Type 7, System Information Type 11, System Information Type 12, System Information Type 13, System Information Type 13.1, System Information Type 13.2, System Information Type 13.3, System Information Type 13.4, System Information Type 14, System Information Type 15, System Information Type 15.1, System Information Type 15.2, System Information Type 15.3, System Information Type 15.4, System Information Type 15.5, System Information Type 16, System Information Type 17, System Information Type 18, Scheduling Block 1, Scheduling Block 2,	
System Information Type 5bis, Extension Type	REL-6

10.3.8.22 SIB type SIBs only

The SIB type identifies a specific system information block.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SIB type SIBs only	MP		Enumerated, see below	Four spare values are needed

List of enumerated values	Version
System Information Type 1, System Information Type 2, System Information Type 3, System Information Type 4, System Information Type 5, System Information Type 6, System Information Type 7, System Information Type 11, System Information Type 12, System Information Type 13, System Information Type 13.1, System Information Type 13.2, System Information Type 13.3, System Information Type 13.4, System Information Type 14, System Information Type 15, System Information Type 15.1, System Information Type 15.2, System Information Type 15.3, System Information Type 15.4, System Information Type 15.5, System Information Type 16, System Information Type 17, System Information Type 18,	
System Information Type 5bis	REL-6

10.3.9 ANSI-41 Information elements

10.3.9.1 ANSI-41 Core Network Information

Information element/Group name	Need	Multi	Type and reference	Semantics description
P_REV	MP		P_REV 10.3.9.10	
MIN_P_REV	MP		MIN_P_REV 10.3.9.8	
SID	MP		SID 10.3.9.11	
NID	MP		NID 10.3.9.9	

10.3.9.2 ANSI-41 Global Service Redirection information

This Information Element contains ANSI-41 Global Service Redirection information.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
ANSI-41 Global Service Redirection information	MP		ANSI-41 NAS parameter, 10.3.9.3	Formatted and coded according to the 3GPP2 document "G3G CDMA DS on ANSI-41"

10.3.9.3 ANSI-41 NAS parameter

This Information Element contains ANSI-41 User Zone Identification information.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
ANSI-41 NAS parameter	MP		Bit string (size (1..2048))	The first bit contains the first bit of the ANSI-41 information.

10.3.9.4 ANSI-41 NAS system information

This Information Element contains ANSI-41 system information.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
NAS (ANSI-41) system information	MP		ANSI-41 NAS parameter, 10.3.9.3	Formatted and coded according to the 3GPP2 document "G3G CDMA DS on ANSI-41"

10.3.9.5 ANSI-41 Private Neighbour List information

This Information Element contains ANSI-41 Private Neighbour List information.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
ANSI-41 Private Neighbour List information	MP		ANSI-41 NAS parameter, 10.3.9.3	Formatted and coded according to the 3GPP2 document "G3G CDMA DS on ANSI-41"

10.3.9.6 ANSI-41 RAND information

This Information Element contains ANSI-41 RAND information.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
ANSI-41 RAND information	MP		ANSI-41 NAS parameter, 10.3.9.3	Formatted and coded according to the 3GPP2 document "G3G CDMA DS on ANSI-41"

10.3.9.7 ANSI-41 User Zone Identification information

This Information Element contains ANSI-41 User Zone Identification information.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
ANSI-41 User Zone Identification information	MP		ANSI-41 NAS parameter, 10.3.9.3	Formatted and coded according to the 3GPP2 document "G3G CDMA DS on ANSI-41"

10.3.9.8 MIN_P_REV

This Information Element contains minimum protocol revision level.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
MIN_P_REV	MP		Bit string (8)	Minimum protocol revision level. The first/leftmost bit of the bit string contains the most significant bit of the MIN_P_REV.

10.3.9.9 NID

This Information Element contains Network identification.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
NID	MP		Bit string (16)	Network identification. The first/leftmost bit of the bit string contains the most significant bit of the NID.

10.3.9.10 P_REV

This Information Element contains protocol revision level.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
P_REV	MP		Bit string (8)	Protocol revision level. The first/leftmost bit of the bit string contains the most significant bit of the P_REV.

10.3.9.11 SID

This Information Element contains System identification.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SID	MP		Bit string (15)	System identification. The first/leftmost bit of the bit string contains the most significant bit of the SID.

10.3.9a MBMS Information elements

10.3.9a.1 MBMS Common CCTrCH identity

Identifies a Coded Composite Transport channel configuration included within the MBMS COMMON P-T-M RB INFORMATION message.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Common CCTrCh identity	MP		Integer (1..32)		REL-6

10.3.9a.2 MBMS Common PhyCh identity

Identifies a physical channel configuration included within the MBMS COMMON P-T-M RB INFORMATION message.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Common PhyCh identity	MP		Integer (1..32)		REL-6

10.3.9a.3 MBMS Common RB identity

Identifies a radio bearer channel configuration included within the MBMS COMMON P-T-M RB INFORMATION message.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Common RB identity	MP		Integer (1..32)		REL-6

10.3.9a.4 MBMS Common TrCh identity

Identifies a transport channel configuration included within the MBMS COMMON P-T-M RB INFORMATION message.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Common TrCh identity	MP		Integer (1..32)		REL-6

10.3.9a.5 MBMS Current cell S-CCPCH identity

Identifies one of the current cell's Secondary CCPCH's.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Current cell S-CCPCH identity	MP		Integer (1..maxSCCPCH)		REL-6

10.3.9a.6 Void

10.3.9a.7 MBMS L1 combining schedule

Includes information about the MBMS L1 combining schedule.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS L1 combining cycle length	MP		Enumerated (32, 64, 128, 256, 512, 1024)	In number of radio frames	REL-6
MBMS L1 combining cycle offset	MD		Integer (0.. MBMS L1 combining cycle length - 4) by step of 4	Start of the L1 combining cycle (relative to the timing of the current cell) in number of radio frames. Default value is no offset	REL-6
MTCH L1- combining period list	MP	1 to < maxMBMS-L1CP>		One or more periods in which L1 combining is performed	REL-6
>Start	MP		Integer (0.. MBMS L1 combining cycle length - 4) by step of 4	Number of frames from the end of the previous combining period or the start of the cycle (for the first period)	REL-6
>Duration	MP		Integer (4.. MBMS L1 combining cycle length) by step of 4	Number of frames (see note)	REL-6

NOTE: The MTCH L1- combining period should indicate one or more complete TTIs.

10.3.9a.7o MBMS p-t-m activation time

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS p-t-m activation time	MP		Integer (0..2047)	The 11 LSB of the SFN. Note 1 and 2.	REL-6
Note 1: The "MBMS p-t-m activation time" indicates the start of the 10 ms frame corresponding to the indicated SFN value and of the primary CCPCH of the cell where this IE is transmitted.					
Note 2: The range of the "MBMS p-t-m activation time" is from 10 ms after the beginning of the MCCH modification period wherein it is transmitted and to the end of next following MCCH modification period. The UE shall consider a value out of this range as expired.					

10.3.9a.7a MBMS p-t-m RB information

Includes information about an MBMS p-t-m radio bearers mapped on a TrCH.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
RB information	CV-*Curr*		MBMS Common RB identity 10.3.9a.3		REL-6
MBMS short transmission ID	MP		MBMS Short transmission identity 10.3.9a.10		REL-6
MBMS logical channel identity	MP		Integer (1..15)	This identifier is used to distinguish different MTCH mapped on to a TrCh ("MBMS-Id" within the MAC header[15])	REL-6
L1 combining status	CV-*Neigh*		Boolean	The IE is only applicable in case of partial L1 comining, in which case value TRUE means that L1 combining is used for this radio bearer	REL-6

Condition	Explanation
Curr	The IE is mandatory present if the IE "MBMS p-t-m RB information list" is included in the MBMS CURRENT CELL P-T-M RB INFORMATION message and not needed otherwise
Neigh	The IE is mandatory present if the IE "MBMS p-t-m RB information list" is included in the MBMS NEIGHBOURING CELL P-T-M RB INFORMATION message and not needed otherwise

10.3.9a.7b MBMS Selected Service Info

This IE indicates whether the UE has any MBMS Selected Services, and if it does it includes the list of MBMS Selected Services.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE *Status*					
>None				(no data)	
>Some	MP		MBMS Selected Services Full 10.3.9a.7c		REL-6

10.3.9a.7c MBMS Selected Services Full

This IE provides the MBMS Selected Services by means of the full identity.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Selected Services	MP	1 to < maxMBMSservSelect>			REL-6
>MBMS Selected Service ID	MP		MBMS service identity 10.3.9a.8		REL-6

10.3.9a.7d MBMS Selected Services Short

This IE indicates the MBMS Selected Services by means of a short identity to identify the MBMS transmission by referencing the services included in the MBMS MODIFIED SERVICES INFORMATION and the MBMS UNMODIFIED SERVICES INFORMATION messages.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Selected Services	MP	1 to < maxMBMSservSelect>			REL-6
>MBMS Selected Service ID	MP		MBMS Short transmission identity 10.3.9a.10		REL-6
Modification period identity	MP		Integer (0..1)	Indicates the modification period the MBMS short transmission identities refer to	REL-6

10.3.9a.18 MBMS Selected Services Full

This IE provides the MBMS Selected Services by means of the full identity.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Selected Services	MP		1 to < maxMBMSservSelect >		REL-6
>MBMS Selected Service ID	MP		MBMS service identity 10.3.9a.8		REL-6

10.3.9a.8 MBMS Service identity

Includes information about the identity of an MBMS service.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Service ID	MP		MBMS Service ID 10.3.9a.8a		REL-6
CHOICE *PLMN identity*	MP				REL-6
>*SameAs-MIB*				(No data) The PLMN identity is the same as indicated by the IE "PLMN identity" in MIB	REL-6
>*SameAsMIB-MultiPLMN-Id*					REL-6
>>Multi PLMN id	MP		Integer (1..5)	The PLMN identity is one of the PLMN identities (1 to 5) in the IE "Multiple PLMN List" in MIB	REL-6
>*ExplicitPLMN-Id*					REL-6
>>PLMN identity	MP		PLMN identity 10.3.1.11		REL-6

10.3.9a.8a MBMS Service ID

Uniquely identifies an MBMS bearer service within a PLMN.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Service ID	MP		Octet string (3)	The content of the MBMS Service ID field is coded as octets 3 to 5 of the IE *Temporary Mobile Group Identity* [5]	REL-6

10.3.9a.9 MBMS Session identity

Includes information about the the identity of a session of an MBMS service.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Session ID	MP		Octet string (1)		REL-6

10.3.9a.10 MBMS Short transmission identity

Includes a short identity of the MBMS transmission identity, which concerns a session of a specific service.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS short transmission identity	MP		Integer (1..maxMBMSservUnmodif)	Reference/ index to a transmission listed in the MBMS MODIFIED SERVICES INFORMATION or MBMS UNMODIFIED SERVICES INFORMATION	REL-6

10.3.9a.10a MBMS Soft Combining Timing Offset

Indicates the timing offset applied in the CFN calculation in sub-clause 8.5.15.5 for a secondary CCPCH carrying only MBMS logical channels. It is used for FDD only.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>MBMS Soft Combining Timing Offset	MP		Integer (0, 10, 20, 40)	Timing offset applied in the CFN calculation in sub-clause 8.5.15.5, in ms.	REL-6

10.3.9a.11 MBMS specific timers and counters

Includes MBMS specific timers and counters.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
T318	MD		Integer(250... 2000 by step of 250, 3000, 4000, 6000, 8000, 10000, 12000, 16000)	Value in milliseconds. Default value is 1000.	REL-6

10.3.9a.12 MBMS Transmission identity

Includes information about the MBMS transmission identity, which concerns a session of a specific service.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS Service ID	MP		MBMS Service identity 10.3.9a.8		REL-6
MBMS Session ID	OP		MBMS Session identity 10.3.9a.9		REL-6

10.3.9a.13 MCCH configuration information

Includes information about the MCCH configuration.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
Access Info Period coefficient	MP		Integer (0..3)	Represents *a*, the access information coefficient. The number of repetitions per modification period equals 2^a while the actual access information period, in number of frames, equals MP DIV 2^a	REL-6
Repetition Period coefficient	MP		Integer (0..3)	Represents *r*, the repetition period coefficient. The number of repetitions per modification period equals 2^r while the actual repetition period, in number of frames, equals MP DIV 2^r	REL-6

Modification period coefficient	MP		Integer (7..10)	Represents *m*, the modification period coefficient. The actual modification period (MP), in number of frames, equals 2^m	REL-6
RLC info	MP		RLC info MBMS 10.3.4.23a		REL-6
TCTF presence	CV-*MBMS*		Enumerated (false)	By default the TCTF is present even though the FACH only carries one logical channel (type). When this IE is included, the TCTF is absent	REL-6

Condition	Explanation
MBMS	This IE is not needed if the IE is contained within the IE "Secondary CCPCH system information", otherwise the IE is optional.

10.3.9a.14 MICH configuration information

Includes information about the MICH configuration.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MICH Power offset	MP		MICH Power offset 10.3.9a.15		REL-6
CHOICE *mode*	MP				REL-6
>FDD					REL-6
>>Channelisation code	MP		Integer (0.255)		REL-6
>>Number of NI per frame	MP		Integer (18, 36, 72, 144)		REL-6
>>STTD indicator	MP		STTD Indicator 10.3.6.78		REL-6
>TDD					REL-6
>>Timeslot number	MP		Timeslot number 10.3.6.84		REL-6
>>Midamble shift and burst type	MP		Midamble shift and burst type 10.3.6.41		REL-6
>>CHOICE *TDD option*	MP				REL-6
>>>3.84 Mcps TDD					REL-6
>>>>Channelisation code	MP		Enumerated ((16/1)…(16/16))		REL-6
>>>7.68 Mcps TDD					REL-7
>>>>Channelisation code	MP		Enumerated ((32/1)…(32/32))		REL-7
>>>1.28 Mcps TDD					REL-6
>>>>Codes list	MP	1 to 2			REL-6
>>>>>Channelisation code	MP		Enumerated ((16/1)…(16/16))		REL-6
>>Repetition period/length	MD		Enumerated((4/2),(8/2), (8/4),(16/2), (16/4), (32/2),(32/4),(64/2),(64/4))	Default value is "(64/2)".	REL-6
>>Offset	MP		Integer (0…Repetition period - 1)	SFN mod Repetitionperiod = Offset.	REL-6
>>MBMS Notification indicator length	MD		Integer (4, 8, 16)	Indicates the length of one MBMS Notification indicator in bits. Default value is 4.	REL-6

10.3.9a.15 MICH Power offset

This is the power transmitted on the MICH minus power of the Primary CPICH in FDD and Primary CCPCH Tx Power in TDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
MICH Power offset	MP		Integer(-10 .. +5)	Offset in dB	REL-6

10.3.9a.16 MSCH configuration information

Includes information about the MSCH configuration.

Information element/Group name	Need	Multi	Type and reference	Semantics description	Version
MSCH Scheduling information	MP			For FDD, scheduling information is provided starting at (SFN – (SCTO div 10ms)) mod MSCH_REP = MSCH_OFF For TDD, scheduling information is provided starting at SFN mod MSCH_REP = MSCH_OFF	REL-6
>Scheduling period	MD		Enumerated (32, 64, 128, 256, 512, 1024)	The period, in number of frames, between MBMS scheduling messages (MSCH_REP) Default value is the value included in the MBMS GENERAL INFORMATION message	REL-6
>Scheduling offset	MD		Integer (0..(MSCH_REP-1))	The position of MBMS scheduling messages relative to timing of the corresponding cell (MSCH_OFF) Default value is the value included in the MBMS GENERAL INFORMATION message	REL-6
>RLC info	MD		RLC info MBMS 10.3.4.23a	Default value is the one included in the MBMS GENERAL INFORMATION message	REL-6
TCTF presence	OP		Enumerated (false)	By default the TCTF is present even though the FACH only carries one logical channel (type). When this IE is included, the TCTF is absent	REL-6

10.3.10 Multiplicity values and type constraint values

The following table includes constants that are either used as multi bounds (name starting with "max") or as high or low value in a type specification (name starting with "lo" or "hi"). Constants are specified only for values appearing more than once in the RRC specification. In case a constant is related to one or more other constants, an expression is included in the "value" column instead of the actual value.

Constant	Explanation	Value	Version
CN information			
maxCNdomains	Maximum number of CN domains	4	
UTRAN mobility information			
maxRAT	Maximum number or Radio Access Technologies	maxOtherRAT + 1	
maxOtherRAT	Maximum number or other Radio Access Technologies	15	
maxURA	Maximum number of URAs in a cell	8	
maxInterSysMessages	Maximum number of Inter System Messages	4	
maxRABsetup	Maximum number of RABs to be established	16	
UE information			
maxtransactions	Maximum number of parallel RRC transactions in downlink	25	
maxPDCPalgoType	Maximum number of PDCP algorithm types	8	
maxFreqBandsFDD	Maximum number of frequency bands supported by the UE as defined in [21]	8	
maxFreqBandsFDD-ext	Maximum number of frequency bands as defined in [21] and treated by RRC	22	REL-6
maxFreqBandsTDD	Maximum number of frequency bands supported by the UE as defined in [22]	4	
maxFreqBandsGSM	Maximum number of frequency bands supported by the UE as defined in [45]	16	
maxPage1	Number of UEs paged in the Paging Type 1 message	8	
maxSystemCapability	Maximum number of system specific capabilities that can be requested in one message.	16	
MaxURNTIgroup	Maximum number of U-RNTI groups in one message	8	REL-5
RB information			
maxPredefConfig	Maximum number of predefined configurations	16	
maxRB	Maximum number of RBs	32	
maxSRBsetup	Maximum number of signalling RBs to be established	8	
maxRBperRAB	Maximum number of RBs per RAB	8	
maxRBallRABs	Maximum number of non signalling RBs	27	
maxRBperTrCh	Maximum number of RB per TrCh	16	REL-6
maxRBMuxOptions	Maximum number of RB multiplexing options	8	
maxLoCHperRLC	Maximum number of logical channels per RLC entity	2	
maxRLCPDUsizePerLogChan	Maximum number of RLC PDU sizes per logical channel mapped on E-DCH	32	REL-6
MaxROHC-PacketSizes	Maximum number of packet sizes that are allowed to be produced by ROHC.	16	
MaxROHC-Profiles	Maximum number of profiles supported by ROHC on a given RB.	8	
maxRFC 3095-CID	Maximum number of available CID values per radio bearer	16384	REL-5
TrCH information			
maxE-DCHMACdFlow	Maximum number of E-DCH MAC-d flows	8	REL-6
MaxHProcesses	Maximum number of H-ARQ processes	8	REL-5
MaxHSDSCH_TB_index	Maximum number of TB set size configurations for the HS-DSCH.	64 (FDD and 1.28 MCPS TDD); 512 (3.84 Mcps TDD); 1024 (7.68 Mcps TDD)	REL-5

Constant	Explanation	Value	Version
maxMACdPDUSizes	Maximum number of MAC-d PDU sizes per queue permitted for MAC-hs	8	REL-5
maxTrCH	Maximum number of transport channels used in one direction (UL or DL)	32	
maxTrCHpreconf	Maximum number of preconfigured Transport channels, per direction	16	
maxCCTrCH	Maximum number of CCTrCHs	8	
maxQueueID	Maximum number of Mac-hs queues	8	REL-5
MaxTF	Maximum number of different transport formats that can be included in the Transport format set for one transport channel	32	
maxTFC	Maximum number of Transport Format Combinations	1024	
maxTFCsub	Maximum number of Transport Format Combinations Subset	1024	
maxSIBperMsg	Maximum number of complete system information blocks per SYSTEM INFORMATION message	16	
maxSIB	Maximum number of references to other system information blocks.	32	
maxSIB-FACH	Maximum number of references to system information blocks on the FACH	8	
PhyCH information			
maxHSSCCHs	Maximum number of HSSCCH codes that can be assigned to a UE	4	REL-5
maxAC	Maximum number of access classes	16	
maxASC	Maximum number of access service classes	8	
maxASCmap	Maximum number of access class to access service classes mappings	7	
maxASCpersist	Maximum number of access service classes for which persistence scaling factors are specified	6	
maxPRACH	Maximum number of PRACHs in a cell	16	
MaxPRACH_FPACH	Maximum number of PRACH / FPACH pairs in a cell (1.28 Mcps TDD)	8	REL-4
maxFACHPCH	Maximum number of FACHs and PCHs mapped onto one secondary CCPCHs	8	
maxRL	Maximum number of radio links	8	
maxEDCHRL	Maximum number of E-DCH radio links	4	REL-6
maxSCCPCH	Maximum number of secondary CCPCHs per cell	16	
maxDPDCH-UL	Maximum number of DPDCHs per cell	6	
maxDPCH-DLchan	Maximum number of channelisation codes used for DL DPCH	8	
maxPUSCH	Maximum number of PUSCHs	(8)	
maxPDSCH	Maximum number of PDSCHs	8	
maxTS	Maximum number of timeslots used in one direction (UL or DL)	14 (3.84 Mcps TDD and 7.68 Mcps TDD)	
		6 (1.28 Mcps TDD)	REL-4
hiPUSCHidentities	Maximum number of PUSCH Identities	64	
hiPDSCHidentities	Maximum number of PDSCH Identities	64	
maxNumE-AGCH	Maximum number of E-AGCHs (3.84/7.68 Mcps TDD)	16	REL-7
Measurement information			
maxTGPS	Maximum number of transmission gap pattern sequences	6	
maxAdditionalMeas	Maximum number of additional measurements for a given measurement identity	4	
maxMeasEvent	Maximum number of events that can be listed in measurement reporting criteria	8	
maxMeasParEvent	Maximum number of measurement parameters (e.g. thresholds) per event	2	
maxMeasIntervals	Maximum number of intervals that define the mapping function between the measurements for the cell quality Q of a cell and the representing	1	

Constant	Explanation	Value	Version
	quality value		
maxCellMeas	Maximum number of cells to measure	32	
maxReportedGSMCells	Maximum number of GSM cells to be reported	8	
maxFreq	Maximum number of frequencies to measure	8	
maxSat	Maximum number of satellites to measure	16	
maxSatAlmanacStorage	Maximum number of satellites for which to store GPS Almanac information	32	
HiRM	Maximum number that could be set as rate matching attribute for a transport channel	256	
Frequency information			
MaxFDDFreqList	Maximum number of FDD carrier frequencies to be stored in USIM	4	
MaxTDDFreqList	Maximum number of TDD carrier frequencies to be stored in USIM	4	
MaxFDDFreqCellList	Maximum number of neighbouring FDD cells to be stored in USIM	32	
MaxTDDFreqCellList	Maximum number of neighbouring TDD cells to be stored in USIM	32	
MaxGSMCellList	Maximum number of GSM cells to be stored in USIM	32	
Other information			
MaxGERANSI	Maximum number of GERAN SI blocks that can be provided as part of NACC information	8	REL-5
maxNumGSMFreqRanges	Maximum number of GSM Frequency Ranges to store	32	
MaxNumFDDFreqs	Maximum number of FDD centre frequencies to store	8	
MaxNumTDDFreqs	Maximum number of TDD centre frequencies to store	8	
maxNumCDMA200Freqs	Maximum number of CDMA2000 centre frequencies to store	8	
maxGSMTargetCells	Maximum number of GSM target cells	32	REL-6
MBMS information			
maxMBMS-CommonCCTrCh	Maximum number of CCTrCh configurations included in the MBMS COMMON P-T-M RB INFORMATION message	32	REL-6
maxMBMS-CommonPhyCh	Maximum number of PhyCh configurations included in the MBMS COMMON P-T-M RB INFORMATION message	32	REL-6
maxMBMS-CommonRB	Maximum number of RB configurations included in the MBMS COMMON P-T-M RB INFORMATION message	32	REL-6
maxMBMS-CommonTrCh	Maximum number of TrCh configurations included in the MBMS COMMON P-T-M RB INFORMATION message	32	REL-6
maxMBMS-Freq	Maximum number of MBMS preferred frequencies	4	REL-6
maxMBMS-L1CP	Maximum number of periods in which layer 1 combining applies	4	REL-6
maxMBMSservCount	Maximum number of MBMS services in a Access Info message	8	REL-6
maxMBMSservModif	Maximum number of MBMS services in a MBMS MODIFIED SERVICES INFORMATION message	32	REL-6
maxMBMSservSched	Maximum number of MBMS services in a MBMS SCHEDULING INFORMATION message	16	REL-6
maxMBMSservSelect	Maximum number of MBMS Selected Services in a CELL UPDATE or RRC CONNECTION REQUEST message	8	REL-6
maxMBMSservUnmodif	Maximum number of MBMS services in a MBMS UNMODIFIED SERVICES INFORMATION message	64	REL-6
maxMBMSTransmis	Maximum number of transmissions for which scheduling information is provided within a scheduling period	4	REL-6

11 Message and Information element abstract syntax (with ASN.1)

This clause contains definitions for RRC PDUs and IEs using a subset of ASN.1 as specified in [14]. PDU and IE definitions are grouped into separate ASN.1 modules.

11.0 General

Some messages and/or IEs may include one or more IEs with name "dummy" that are included only in the ASN.1. The UE should avoid sending information elements that are named "dummy" to UTRAN. Likewise, UTRAN should avoid sending IEs with name "dummy" to the UE. If the UE anyhow receives an information element named "dummy", it shall ignore the IE and process the rest of the message as if the IE was not included.

NOTE: An IE with name "dummy" concerns an information element that was (erroneously) included in a previous version of the specification and has been removed by replacing it with a dummy with same type.

The UE shall only include the "variable length extension container" when it sends a non critical extension that according to this specification shall be transferred within this container.

If the abstract syntax of an IE is defined using the ASN.1 type "BIT STRING", and this IE corresponds to a functional IE definition in tabular format, in which the significance of bits is semantically defined, the following general rule shall be applied:

The bits in the ASN.1 bit string shall represent the semantics of the functional IE definition in decreasing order of bit significance;

- with the first (or leftmost) bit in the bit string representing the most significant bit; and
- with the last (or rightmost) bit in the bit string representing the least significant bit.

11.1 General message structure

```
Class-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS

    ActiveSetUpdate,
    ActiveSetUpdateComplete,
    ActiveSetUpdateFailure,
    AssistanceDataDelivery,
    CellChangeOrderFromUTRAN,
    CellChangeOrderFromUTRANFailure,
    CellUpdate,
    CellUpdateConfirm-CCCH,
    CellUpdateConfirm,
    CounterCheck,
    CounterCheckResponse,
    DownlinkDirectTransfer,
    HandoverToUTRANComplete,
    InitialDirectTransfer,
    HandoverFromUTRANCommand-GERANIu,
    HandoverFromUTRANCommand-GSM,
    HandoverFromUTRANCommand-CDMA2000,
    HandoverFromUTRANFailure,
    MBMSAccessInformation,
    MBMSCommonPTMRBInformation,
    MBMSCurrentCellPTMRBInformation,
    MBMSGeneralInformation,
    MBMSModificationRequest,
    MBMSModifiedServicesInformation,
    MBMSNeighbouringCellPTMRBInformation,
    MBMSSchedulingInformation,
    MBMSUnmodifiedServicesInformation,
    MeasurementControl,
    MeasurementControlFailure,
```

```
    MeasurementReport,
    PagingType1,
    PagingType2,
    PhysicalChannelReconfiguration,
    PhysicalChannelReconfigurationComplete,
    PhysicalChannelReconfigurationFailure,
    PhysicalSharedChannelAllocation,
    PUSCHCapacityRequest,
    RadioBearerReconfiguration,
    RadioBearerReconfigurationComplete,
    RadioBearerReconfigurationFailure,
    RadioBearerRelease,
    RadioBearerReleaseComplete,
    RadioBearerReleaseFailure,
    RadioBearerSetup,
    RadioBearerSetupComplete,
    RadioBearerSetupFailure,
    RRCConnectionReject,
    RRCConnectionRelease,
    RRCConnectionRelease-CCCH,
    RRCConnectionReleaseComplete,
    RRCConnectionRequest,
    RRCConnectionSetup,
    RRCConnectionSetupComplete,
    RRCStatus,
    SecurityModeCommand,
    SecurityModeComplete,
    SecurityModeFailure,
    SignallingConnectionRelease,
    SignallingConnectionReleaseIndication,
    SystemInformation-BCH,
    SystemInformation-FACH,
    SystemInformationChangeIndication,
    TransportChannelReconfiguration,
    TransportChannelReconfigurationComplete,
    TransportChannelReconfigurationFailure,
    TransportFormatCombinationControl,
    TransportFormatCombinationControlFailure,
    UECapabilityEnquiry,
    UECapabilityInformation,
    UECapabilityInformationConfirm,
    UplinkDirectTransfer,
    UplinkPhysicalChannelControl,
    URAUpdate,
    URAUpdateConfirm,
    URAUpdateConfirm-CCCH,
    UTRANMobilityInformation,
    UTRANMobilityInformationConfirm,
    UTRANMobilityInformationFailure
FROM PDU-definitions

-- User Equipment IEs :
    IntegrityCheckInfo
FROM InformationElements;

--********************************************************
--
-- Downlink DCCH messages
--
--********************************************************

DL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                 DL-DCCH-MessageType
}

DL-DCCH-MessageType ::= CHOICE {
    activeSetUpdate                     ActiveSetUpdate,
    assistanceDataDelivery              AssistanceDataDelivery,
    cellChangeOrderFromUTRAN            CellChangeOrderFromUTRAN,
    cellUpdateConfirm                   CellUpdateConfirm,
    counterCheck                        CounterCheck,
    downlinkDirectTransfer              DownlinkDirectTransfer,
    handoverFromUTRANCommand-GSM        HandoverFromUTRANCommand-GSM,
    handoverFromUTRANCommand-CDMA2000   HandoverFromUTRANCommand-CDMA2000,
    measurementControl                  MeasurementControl,
    pagingType2                         PagingType2,
    physicalChannelReconfiguration      PhysicalChannelReconfiguration,
```

```
    physicalSharedChannelAllocation     PhysicalSharedChannelAllocation,
    radioBearerReconfiguration          RadioBearerReconfiguration,
    radioBearerRelease                  RadioBearerRelease,
    radioBearerSetup                    RadioBearerSetup,
    rrcConnectionRelease                RRCConnectionRelease,
    securityModeCommand                 SecurityModeCommand,
    signallingConnectionRelease         SignallingConnectionRelease,
    transportChannelReconfiguration     TransportChannelReconfiguration,
    transportFormatCombinationControl   TransportFormatCombinationControl,
    ueCapabilityEnquiry                 UECapabilityEnquiry,
    ueCapabilityInformationConfirm      UECapabilityInformationConfirm,
    uplinkPhysicalChannelControl        UplinkPhysicalChannelControl,
    uraUpdateConfirm                    URAUpdateConfirm,
    utranMobilityInformation            UTRANMobilityInformation,
    handoverFromUTRANCommand-GERANIu    HandoverFromUTRANCommand-GERANIu,
    mbmsModifiedServicesInformation     MBMSModifiedServicesInformation,
    spare5                              NULL,
    spare4                              NULL,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}

--************************************************************
--
-- Uplink DCCH messages
--
--************************************************************

UL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                 UL-DCCH-MessageType
}

UL-DCCH-MessageType ::= CHOICE {
    activeSetUpdateComplete             ActiveSetUpdateComplete,
    activeSetUpdateFailure              ActiveSetUpdateFailure,
    cellChangeOrderFromUTRANFailure     CellChangeOrderFromUTRANFailure,
    counterCheckResponse                CounterCheckResponse,
    handoverToUTRANComplete             HandoverToUTRANComplete,
    initialDirectTransfer               InitialDirectTransfer,
    handoverFromUTRANFailure            HandoverFromUTRANFailure,
    measurementControlFailure           MeasurementControlFailure,
    measurementReport                   MeasurementReport,
    physicalChannelReconfigurationComplete
                                        PhysicalChannelReconfigurationComplete,
    physicalChannelReconfigurationFailure
                                        PhysicalChannelReconfigurationFailure,
    radioBearerReconfigurationComplete  RadioBearerReconfigurationComplete,
    radioBearerReconfigurationFailure   RadioBearerReconfigurationFailure,
    radioBearerReleaseComplete          RadioBearerReleaseComplete,
    radioBearerReleaseFailure           RadioBearerReleaseFailure,
    radioBearerSetupComplete            RadioBearerSetupComplete,
    radioBearerSetupFailure             RadioBearerSetupFailure,
    rrcConnectionReleaseComplete        RRCConnectionReleaseComplete,
    rrcConnectionSetupComplete          RRCConnectionSetupComplete,
    rrcStatus                           RRCStatus,
    securityModeComplete                SecurityModeComplete,
    securityModeFailure                 SecurityModeFailure,
    signallingConnectionReleaseIndication
                                        SignallingConnectionReleaseIndication,
    transportChannelReconfigurationComplete
                                        TransportChannelReconfigurationComplete,
    transportChannelReconfigurationFailure
                                        TransportChannelReconfigurationFailure,
    transportFormatCombinationControlFailure
                                        TransportFormatCombinationControlFailure,
    ueCapabilityInformation             UECapabilityInformation,
    uplinkDirectTransfer                UplinkDirectTransfer,
    utranMobilityInformationConfirm     UTRANMobilityInformationConfirm,
    utranMobilityInformationFailure     UTRANMobilityInformationFailure,
    mbmsModificationRequest             MBMSModificationRequest,
    spare1                              NULL
}

--************************************************************
--
-- Downlink CCCH messages
```

```
--
--**************************************************************

DL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                 DL-CCCH-MessageType
}

DL-CCCH-MessageType ::= CHOICE {
    cellUpdateConfirm                   CellUpdateConfirm-CCCH,
    rrcConnectionReject                 RRCConnectionReject,
    rrcConnectionRelease                RRCConnectionRelease-CCCH,
    rrcConnectionSetup                  RRCConnectionSetup,
    uraUpdateConfirm                    URAUpdateConfirm-CCCH,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}

--**************************************************************
--
-- Uplink CCCH messages
--
--**************************************************************

UL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                 UL-CCCH-MessageType
}

UL-CCCH-MessageType ::= CHOICE {
    cellUpdate                          CellUpdate,
    rrcConnectionRequest                RRCConnectionRequest,
    uraUpdate                           URAUpdate,
    spare                               NULL
}

--**************************************************************
--
-- PCCH messages
--
--**************************************************************

PCCH-Message ::= SEQUENCE {
    message             PCCH-MessageType
}

PCCH-MessageType ::= CHOICE {
    pagingType1                         PagingType1,
    spare                               NULL
}

--**************************************************************
--
-- Downlink SHCCH messages
--
--**************************************************************

DL-SHCCH-Message ::= SEQUENCE {
    message                 DL-SHCCH-MessageType
}

DL-SHCCH-MessageType ::= CHOICE {
    physicalSharedChannelAllocation     PhysicalSharedChannelAllocation,
    spare                               NULL
}

--**************************************************************
--
-- Uplink SHCCH messages
--
--**************************************************************

UL-SHCCH-Message ::= SEQUENCE {
    message                 UL-SHCCH-MessageType
}

UL-SHCCH-MessageType ::= CHOICE {
```

```
    puschCapacityRequest                PUSCHCapacityRequest,
    spare                               NULL
}


--**************************************************************
--
-- BCCH messages sent on FACH
--
--**************************************************************

BCCH-FACH-Message ::= SEQUENCE {
    message             BCCH-FACH-MessageType
}

BCCH-FACH-MessageType ::= CHOICE {
    systemInformation                   SystemInformation-FACH,
    systemInformationChangeIndication   SystemInformationChangeIndication,
    spare2                              NULL,
    spare1                              NULL
}

--**************************************************************
--
-- BCCH messages sent on BCH
--
--**************************************************************

BCCH-BCH-Message ::= SEQUENCE {
    message             SystemInformation-BCH
}

--**************************************************************
--
-- MCCH messages
--
--**************************************************************

MCCH-Message ::= SEQUENCE {
    message             MCCH-MessageType
}

MCCH-MessageType ::= CHOICE {
    mbmsAccessInformation               MBMSAccessInformation,
    mbmsCommonPTMRBInformation          MBMSCommonPTMRBInformation,
    mbmsCurrentCellPTMRBInformation     MBMSCurrentCellPTMRBInformation,
    mbmsGeneralInformation              MBMSGeneralInformation,
    mbmsModifiedServicesInformation     MBMSModifiedServicesInformation,
    mbmsNeighbouringCellPTMRBInformation
                                        MBMSNeighbouringCellPTMRBInformation,
    mbmsUnmodifiedServicesInformation   MBMSUnmodifiedServicesInformation,
    spare9                              NULL,
    spare8                              NULL,
    spare7                              NULL,
    spare6                              NULL,
    spare5                              NULL,
    spare4                              NULL,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}

--**************************************************************
--
-- MSCH messages
--
--**************************************************************

MSCH-Message ::= SEQUENCE {
    message             MSCH-MessageType
}

MSCH-MessageType ::= CHOICE {
    mbmsSchedulingInformation           MBMSSchedulingInformation,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}
```

```
END
```

11.2 PDU definitions

```
--**************************************************************
--
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--
--**************************************************************

PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--**************************************************************
--
-- IE parameter types from other modules
--
--**************************************************************

IMPORTS

-- Core Network IEs :
    CN-DomainIdentity,
    CN-InformationInfo,
    CN-InformationInfo-r6,
    CN-InformationInfoFull,
    NAS-Message,
    PagingRecordTypeID,
    PLMN-Identity,
-- UTRAN Mobility IEs :
    CellIdentity,
    CellIdentity-PerRL-List,
    URA-Identity,
-- User Equipment IEs :
    UE-RadioAccessCapabilityComp-r7,
    UE-RadioAccessCapability-v7xyext,
    UE-RadioAccessCapabBandFDDList2,
    UE-RadioAccessCapabBandFDDList-ext,
    AccessStratumReleaseIndicator,
    ActivationTime,
    C-RNTI,
    CapabilityUpdateRequirement,
    CapabilityUpdateRequirement-r4,
    CapabilityUpdateRequirement-r4-ext,
    CapabilityUpdateRequirement-r5,
    CapabilityUpdateRequirement-r7-ext,
    CellUpdateCause,
    CellUpdateCause-ext,
    CipheringAlgorithm,
    CipheringAlgorithm-r7,
    CipheringModeInfo,
    CipheringModeInfo-r7,
    DelayRestrictionFlag,
    DSCH-RNTI,
    E-RNTI,
    EstablishmentCause,
    FailureCauseWithProtErr,
    FailureCauseWithProtErrTrId,
    GroupReleaseInformation,
    H-RNTI,
    High-MobilityDetected,
    UESpecificBehaviourInformation1idle,
    UESpecificBehaviourInformation1interRAT,
    InitialUE-Identity,
    IntegrityProtActivationInfo,
    IntegrityProtectionModeInfo,
    IntegrityProtectionModeInfo-r7,
    N-308,
    PagingCause,
    PagingRecordList,
    PagingRecord2List-r5,
    ProtocolErrorIndicator,
```

```
    ProtocolErrorIndicatorWithMoreInfo,
    RadioFrequencyBandTDDList,
    Rb-timer-indicator,
    RedirectionInfo,
    RedirectionInfo-r6,
    RejectionCause,
    ReleaseCause,
    RF-CapabilityComp,
    RRC-StateIndicator,
    RRC-TransactionIdentifier,
    SecurityCapability,
    START-Value,
    STARTList,
    SystemSpecificCapUpdateReq-v590ext,
    U-RNTI,
    U-RNTI-Short,
    UE-CapabilityContainer-IEs,
    UE-HSPA-Identities-r6,
    UE-RadioAccessCapability,
    UE-RadioAccessCapability-v370ext,
    UE-RadioAccessCapability-v380ext,
    UE-RadioAccessCapability-v3a0ext,
    UE-RadioAccessCapability-v3g0ext,
    UE-RadioAccessCapability-v4b0ext,
    UE-RadioAccessCapability-v590ext,
    UE-RadioAccessCapability-v5c0ext,
    UE-RadioAccessCapability-v650ext,
    UE-RadioAccessCapability-v680ext,
    UE-RadioAccessCapabilityComp,
    UE-RadioAccessCapabilityComp-ext,
    UE-RadioAccessCapabilityComp2,
    DL-PhysChCapabilityFDD-v380ext,
    UE-ConnTimersAndConstants,
    UE-ConnTimersAndConstants-v3a0ext,
    UE-ConnTimersAndConstants-r5,
    UE-SecurityInformation,
    UE-SecurityInformation2,
    URA-UpdateCause,
    UTRAN-DRX-CycleLengthCoefficient,
    WaitTime,
-- Radio Bearer IEs :
    DefaultConfigIdentity,
    DefaultConfigIdentity-r4,
    DefaultConfigIdentity-r5,
    DefaultConfigIdentity-r6,
    DefaultConfigMode,
    DL-CounterSynchronisationInfo,
    DL-CounterSynchronisationInfo-r5,
    PDCP-ROHC-TargetMode,
    PredefinedConfigIdentity,
    PredefinedConfigStatusList,
    PredefinedConfigStatusListComp,
    PredefinedConfigSetWithDifferentValueTag,
    RAB-Info,
    RAB-Info-r6,
    RAB-Info-r7,
    RAB-Info-Post,
    RAB-InformationList,
    RAB-InformationList-r6,
    RAB-InformationReconfigList,
    RAB-InformationSetupList,
    RAB-InformationSetupList-r4,
    RAB-InformationSetupList-r5,
    RAB-InformationSetupList-r6-ext,
    RAB-InformationSetupList-r6,
    RAB-InformationSetupList-v6b0ext,
    RAB-InformationSetupList-r7,
    RB-ActivationTimeInfoList,
    RB-COUNT-C-InformationList,
    RB-COUNT-C-MSB-InformationList,
    RB-IdentityList,
    RB-InformationAffectedList,
    RB-InformationAffectedList-r5,
    RB-InformationAffectedList-r6,
    RB-InformationChangedList-r6,
    RB-InformationReconfigList,
    RB-InformationReconfigList-r4,
    RB-InformationReconfigList-r5,
```

```
    RB-InformationReconfigList-r6,
    RB-InformationReleaseList,
    RB-PDCPContextRelocationList,
    SRB-InformationSetupList,
    SRB-InformationSetupList-r5,
    SRB-InformationSetupList-r6,
    SRB-InformationSetupList2,
    SRB-InformationSetupList2-r6,
    UL-CounterSynchronisationInfo,
-- Transport Channel IEs:
    CPCH-SetID,
    DL-AddReconfTransChInfo2List,
    DL-AddReconfTransChInfoList,
    DL-AddReconfTransChInfoList-r4,
    DL-AddReconfTransChInfoList-r5,
    DL-CommonTransChInfo,
    DL-CommonTransChInfo-r4,
    DL-DeletedTransChInfoList,
    DL-DeletedTransChInfoList-r5,
    DRAC-StaticInformationList,
    PowerOffsetInfoShort,
    TFC-Subset,
    TFCS-Identity,
    UL-AddReconfTransChInfoList,
    UL-AddReconfTransChInfoList-r6,
    UL-AddReconfTransChInfoList-r7,
    UL-CommonTransChInfo,
    UL-CommonTransChInfo-r4,
    UL-DeletedTransChInfoList,
    UL-DeletedTransChInfoList-r6,
-- Physical Channel IEs :
    Alpha,
    BEACON-PL-Est,
    CCTrCH-PowerControlInfo,
    CCTrCH-PowerControlInfo-r4,
    CCTrCH-PowerControlInfo-r5,
    CCTrCH-PowerControlInfo-r7,
    ConstantValue,
    ConstantValueTdd,
    CPCH-SetInfo,
    DHS-Sync,
    DL-CommonInformation,
    DL-CommonInformation-r4,
    DL-CommonInformation-r5,
    DL-CommonInformation-r6,
    DL-CommonInformation-r7,
    DL-CommonInformationPost,
    DL-HSPDSCH-Information,
    DL-HSPDSCH-Information-r6,
    DL-HSPDSCH-Information-r7,
    DL-InformationPerRL-List,
    DL-InformationPerRL-List-r4,
    DL-InformationPerRL-List-r5,
    DL-InformationPerRL-List-r5bis,
    DL-InformationPerRL-List-r6,
    DL-InformationPerRL-List-r7,
    DL-InformationPerRL-List-v6b0ext,
    DL-InformationPerRL-ListPostFDD,
    DL-InformationPerRL-PostTDD,
    DL-InformationPerRL-PostTDD-LCR-r4,
    DL-PDSCH-Information,
    DL-TPC-PowerOffsetPerRL-List,
    DPC-Mode,
    DPCH-CompressedModeStatusInfo,
    DynamicPersistenceLevel,
    E-DCH-ReconfigurationInfo,
    EXT-UL-TimingAdvance,
    FrequencyInfo,
    FrequencyInfoFDD,
    FrequencyInfoTDD,
    HARQ-Preamble-Mode,
    HS-SICH-Power-Control-Info-TDD384,
    HS-SICH-Power-Control-Info-TDD768,
    MaxAllowedUL-TX-Power,
    OpenLoopPowerControl-IPDL-TDD-r4,
    PDSCH-CapacityAllocationInfo,
    PDSCH-CapacityAllocationInfo-r4,
    PDSCH-CapacityAllocationInfo-r7,
```

```
    PDSCH-Identity,
    PrimaryCPICH-Info,
    PrimaryCCPCH-TX-Power,
    PUSCH-CapacityAllocationInfo,
    PUSCH-CapacityAllocationInfo-r4,
    PUSCH-CapacityAllocationInfo-r7,
    PUSCH-Identity,
    PUSCH-SysInfoList-HCR-r5,
    PDSCH-SysInfoList-HCR-r5,
    RL-AdditionInformationList,
    RL-AdditionInformationList-r6,
    RL-AdditionInformation-list-v6b0ext,
    RL-RemovalInformationList,
    Serving-HSDSCH-CellInformation,
    SpecialBurstScheduling,
    SSDT-Information,
    SSDT-Information-r4,
    TFC-ControlDuration,
    SSDT-UL,
    TimingMaintainedSynchInd,
    TimeslotList,
    TimeslotList-r4,
    TX-DiversityMode,
    UL-ChannelRequirement,
    UL-ChannelRequirement-r4,
    UL-ChannelRequirement-r5,
    UL-ChannelRequirementWithCPCH-SetID,
    UL-ChannelRequirementWithCPCH-SetID-r4,
    UL-ChannelRequirementWithCPCH-SetID-r5,
    UL-DPCH-Info,
    UL-DPCH-Info-r4,
    UL-DPCH-Info-r5,
    UL-DPCH-Info-r6,
    UL-DPCH-Info-r7,
    UL-DPCH-InfoPostFDD,
    UL-DPCH-InfoPostTDD,
    UL-DPCH-InfoPostTDD-LCR-r4,
    UL-EDCH-Information-r6,
    UL-EDCH-Information-r7,
    UL-SynchronisationParameters-r4,
    UL-TimingAdvance,
    UL-TimingAdvanceControl,
    UL-TimingAdvanceControl-r4,
    UL-TimingAdvanceControl-r7,
-- Measurement IEs :
    AdditionalMeasurementID-List,
    DeltaRSCP,
    Frequency-Band,
    EventResults,
    Inter-FreqEventCriteriaList-v590ext,
    Intra-FreqEventCriteriaList-v590ext,
    IntraFreqReportingCriteria-1b-r5,
    IntraFreqEvent-1d-r5,
    IntraFreqCellID,
    InterFreqEventResults-LCR-r4-ext,
    InterRATCellInfoIndication,
    InterRAT-TargetCellDescription,
    MeasuredResults,
    MeasuredResults-v390ext,
    MeasuredResults-v590ext,
    MeasuredResultsList,
    MeasuredResultsList-LCR-r4-ext,
    MeasuredResultsOnRACH,
    MeasuredResultsOnRACHinterFreq,
    MeasurementCommand,
    MeasurementCommand-r4,
    MeasurementCommand-r6,
    MeasurementIdentity,
    MeasurementReportingMode,
    PrimaryCCPCH-RSCP,
    SFN-Offset-Validity,
    TimeslotListWithISCP,
    TrafficVolumeMeasuredResultsList,
    UE-Positioning-GPS-AssistanceData,
    UE-Positioning-Measurement-v390ext,
    UE-Positioning-Measurement-v7xyext,
    UE-Positioning-OTDOA-AssistanceData,
    UE-Positioning-OTDOA-AssistanceData-r4ext,
    UE-Positioning-OTDOA-AssistanceData-UEB,
```

```
    UE-Positioning-OTDOA-AssistanceData-UEB-ext,
    VelocityEstimate,
    UE-InternalMeasuredResults-r7,
-- Other IEs :
    BCCH-ModificationInfo,
    CDMA2000-MessageList,
    GSM-TargetCellInfoList,
    GERANIu-MessageList,
    GERAN-SystemInformation,
    GSM-MessageList,
    InterRAT-ChangeFailureCause,
    InterRAT-HO-FailureCause,
    InterRAT-UE-RadioAccessCapabilityList,
    InterRAT-UE-RadioAccessCapability-v590ext,
    InterRAT-UE-SecurityCapList,
    IntraDomainNasNodeSelector,
    ProtocolErrorMoreInformation,
    Rplmn-Information,
    Rplmn-Information-r4,
    SegCount,
    SegmentIndex,
    SFN-Prime,
    SIB-Data-fixed,
    SIB-Data-variable,
    SIB-Type,
-- MBMS IEs:
    MBMS-CellGroupIdentity-r6,
    MBMS-CommonRBInformationList-r6,
    MBMS-CurrentCell-SCCPCHList-r6,
    MBMS-JoinedInformation-r6,
    MBMS-MICHConfigurationInfo-r6,
    MBMS-MICHConfigurationInfo-r7,
    MBMS-ModifedServiceList-r6,
    MBMS-MSCH-ConfigurationInfo-r6,
    MBMS-NeighbouringCellSCCPCHList-r6,
    MBMS-NumberOfNeighbourCells-r6,
    MBMS-PhyChInformationList-r6,
    MBMS-PL-ServiceRestrictInfo-r6,
    MBMS-PreferredFreqRequest-r6,
    MBMS-PreferredFrequencyList-r6,
    MBMS-PTMActivationTime-r6,
    MBMS-SelectedServiceInfo,
    MBMS-SelectedServicesShort,
    MBMS-ServiceAccessInfoList-r6,
    MBMS-ServiceIdentity-r6,
    MBMS-ServiceSchedulingInfoList-r6,
    MBMS-SIBType5-SCCPCHList-r6,
    MBMS-TimersAndCounters-r6,
    MBMS-TranspChInfoForEachCCTrCh-r6,
    MBMS-TranspChInfoForEachTrCh-r6,
    MBMS-UnmodifiedServiceList-r6
FROM InformationElements

    maxSIBperMsg,
    maxURNTI-Group
FROM Constant-definitions;

-- **************************************************
--
-- ACTIVE SET UPDATE (FDD only)
--
-- **************************************************

ActiveSetUpdate ::= CHOICE {
    r3                              SEQUENCE {
        activeSetUpdate-r3              ActiveSetUpdate-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            activeSetUpdate-r3-add-ext      BIT STRING      OPTIONAL,
            v4b0NonCriticalExtensions       SEQUENCE {
                activeSetUpdate-v4b0ext     ActiveSetUpdate-v4b0ext-IEs,
                v590NonCriticalExtensions       SEQUENCE {
                    activeSetUpdate-v590ext         ActiveSetUpdate-v590ext-IEs,
                    v690NonCriticalExtensions       SEQUENCE {
                        activeSetUpdate-v690ext         ActiveSetUpdate-v690ext-IEs,
                        nonCriticalExtensions           SEQUENCE {} OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            } OPTIONAL
```

```
        } OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r6                              SEQUENCE {
                activeSetUpdate-r6              ActiveSetUpdate-r6-IEs,
                activeSetUpdate-r6-add-ext      BIT STRING      OPTIONAL,
                v6b0NonCriticalExtensions       SEQUENCE {
                    activeSetUpdate-v6b0ext         ActiveSetUpdate-v6b0ext-IEs,
                    nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              SEQUENCE {}
        }
    }
}

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        -- dummy and dummy2 are not used in this version of the specification, they should
        -- not be sent and if received they should be ignored.
        dummy                       IntegrityProtectionModeInfo         OPTIONAL,
        dummy2                      CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        newU-RNTI                       U-RNTI                              OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- Radio bearer IEs
        -- dummy3 is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy3                      DL-CounterSynchronisationInfo       OPTIONAL,
    -- Physical channel IEs
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        rl-AdditionInformationList      RL-AdditionInformationList          OPTIONAL,
        rl-RemovalInformationList       RL-RemovalInformationList           OPTIONAL,
        tx-DiversityMode                TX-DiversityMode                    OPTIONAL,
        -- dummy4 is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy4                          SSDT-Information                    OPTIONAL
}

ActiveSetUpdate-v4b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           SSDT-UL                             OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE RL-AdditionInformationList included in this message
        cell-id-PerRL-List              CellIdentity-PerRL-List             OPTIONAL
}

ActiveSetUpdate-v590ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dpc-Mode                        DPC-Mode,
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List            OPTIONAL
}

ActiveSetUpdate-v690ext-IEs ::= SEQUENCE {
    -- Core network IEs
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL
}

ActiveSetUpdate-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        activationTime                  ActivationTime                      OPTIONAL,
        newU-RNTI                       U-RNTI                              OPTIONAL,
        newH-RNTI                       H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- Physical channel IEs
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        rl-AdditionInformationList      RL-AdditionInformationList-r6       OPTIONAL,
        rl-RemovalInformationList       RL-RemovalInformationList           OPTIONAL,
        tx-DiversityMode                TX-DiversityMode                    OPTIONAL,
```

```
        dpc-Mode                            DPC-Mode                            OPTIONAL,
        serving-HSDSCH-CellInformation      Serving-HSDSCH-CellInformation      OPTIONAL,
        e-dch-ReconfigurationInfo           E-DCH-ReconfigurationInfo           OPTIONAL
}

ActiveSetUpdate-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        rl-AdditionInformation-list-v6b0ext     RL-AdditionInformation-list-v6b0ext OPTIONAL
}

-- **************************************************
--
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- **************************************************

ActiveSetUpdateComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                       IntegrityProtActivationInfo         OPTIONAL,
    -- Radio bearer IEs
        -- dummy2 and dummy3 are not used in this version of the specification, they should
        -- not be sent and if received they should be ignored.
        dummy2                      RB-ActivationTimeInfoList           OPTIONAL,
        dummy3                      UL-CounterSynchronisationInfo       OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            activeSetUpdateComplete-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {} OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- ACTIVE SET UPDATE FAILURE (FDD only)
--
-- **************************************************

ActiveSetUpdateFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            activeSetUpdateFailure-r3-add-ext       BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {} OPTIONAL
    }   OPTIONAL
}

-- **************************************************
--
-- Assistance Data Delivery
--
-- **************************************************

AssistanceDataDelivery ::= CHOICE {
    r3                              SEQUENCE {
        assistanceDataDelivery-r3       AssistanceDataDelivery-r3-IEs,
        v3a0NonCriticalExtensions       SEQUENCE {
            assistanceDataDelivery-v3a0ext  AssistanceDataDelivery-v3a0ext,
            laterNonCriticalExtensions      SEQUENCE {
                -- Container for additional R99 extensions
                assistanceDataDelivery-r3-add-ext       BIT STRING      OPTIONAL,
                v4b0NonCriticalExtensions       SEQUENCE {
                    assistanceDataDelivery-v4b0ext  AssistanceDataDelivery-v4b0ext-IEs,
                    v7xyNonCriticalExtension        SEQUENCE {
                        assistanceDataDelivery-v7xyext  AssistanceDataDelivery-v7xyext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
```

```
    }
}

AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Measurement Information Elements
    ue-positioning-GPS-AssistanceData           UE-Positioning-GPS-AssistanceData
    OPTIONAL,
    ue-positioning-OTDOA-AssistanceData-UEB     UE-Positioning-OTDOA-AssistanceData-UEB
    OPTIONAL
}

AssistanceDataDelivery-v3a0ext ::= SEQUENCE {
    sfn-Offset-Validity                 SFN-Offset-Validity     OPTIONAL
}

AssistanceDataDelivery-v4b0ext-IEs ::= SEQUENCE {
    ue-Positioning-OTDOA-AssistanceData-r4ext   UE-Positioning-OTDOA-AssistanceData-r4ext   OPTIONAL
}

AssistanceDataDelivery-v7xyext-IEs ::= SEQUENCE {
    ue-Positioning-OTDOA-AssistanceData-UEB-ext
                                        UE-Positioning-OTDOA-AssistanceData-UEB-ext     OPTIONAL
}

 -- ************************************************
--
-- CELL CHANGE ORDER FROM UTRAN
--
-- ************************************************

CellChangeOrderFromUTRAN ::= CHOICE {
    r3                              SEQUENCE {
        cellChangeOrderFromUTRAN-IEs        CellChangeOrderFromUTRAN-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            cellChangeOrderFromUTRAN-r3-add-ext     BIT STRING      OPTIONAL,
            v590NonCriticalExtensions           SEQUENCE {
                cellChangeOrderFromUTRAN-v590ext    CellChangeOrderFromUTRAN-v590ext-IEs,
                nonCriticalExtensions           SEQUENCE {} OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           IntegrityProtectionModeInfo         OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        -- the IE rab-InformationList is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored. The IE may be used in a later
        -- version of the protocol and hence it is not changed into a dummy
        rab-InformationList             RAB-InformationList                 OPTIONAL,
        interRAT-TargetCellDescription  InterRAT-TargetCellDescription
}

CellChangeOrderFromUTRAN-v590ext-IEs ::= SEQUENCE {
        geran-SystemInfoType                CHOICE  {
            sI                                  GERAN-SystemInformation,
            pSI                                 GERAN-SystemInformation
        }       OPTIONAL
}

-- ************************************************
--
-- CELL CHANGE ORDER FROM UTRAN FAILURE
--
-- ************************************************

CellChangeOrderFromUTRANFailure ::= CHOICE {
```

```
    r3                              SEQUENCE {
        cellChangeOrderFromUTRANFailure-r3
                                        CellChangeOrderFromUTRANFailure-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            cellChangeOrderFromUTRANFailure-r3-add-ext      BIT STRING  OPTIONAL,
            nonCriticalExtensions           SEQUENCE {} OPTIONAL
        }   OPTIONAL
    },
    -- dummy is not used in this version of the specification and it
    -- should be ignored.
    dummy                           SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

CellChangeOrderFromUTRANFailure-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           IntegrityProtectionModeInfo         OPTIONAL,
        interRAT-ChangeFailureCause     InterRAT-ChangeFailureCause
}

-- **************************************************
--
-- CELL UPDATE
--
-- **************************************************

CellUpdate ::= SEQUENCE {
    -- User equipment IEs
        u-RNTI                          U-RNTI,
        startList       STARTList,
        am-RLC-ErrorIndicationRb2-3or4      BOOLEAN,
        am-RLC-ErrorIndicationRb5orAbove    BOOLEAN,
        cellUpdateCause                 CellUpdateCause,
        -- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
        failureCause                    FailureCauseWithProtErrTrId         OPTIONAL,
        rb-timer-indicator              Rb-timer-indicator,
    -- Measurement IEs
        measuredResultsOnRACH           MeasuredResultsOnRACH               OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            cellUpdate-r3-add-ext           BIT STRING  OPTIONAL,
            v590NonCriticalExtensions   SEQUENCE {
                cellUpdate-v590ext  CellUpdate-v590ext,
                v690NonCriticalExtensions       SEQUENCE {
                    cellUpdate-v690ext              CellUpdate-v690ext-IEs,
                    v6b0NonCriticalExtensions       SEQUENCE {
                        cellUpdate-v6b0ext              CellUpdate-v6b0ext-IEs,
                        v7xyNonCriticalExtensions       SEQUENCE {
                            cellUpdate-v7xyext              CellUpdate-v7xyext-IEs,
                            nonCriticalExtensions           SEQUENCE {} OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }   OPTIONAL
}

CellUpdate-v590ext ::= SEQUENCE {
    establishmentCause              EstablishmentCause  OPTIONAL
}

CellUpdate-v690ext-IEs ::=          SEQUENCE {
    -- User equipment IEs
        cellUpdateCause-ext             CellUpdateCause-ext                 OPTIONAL,
        trafficVolumeIndicator          ENUMERATED { true }                 OPTIONAL,
    -- Measurement IEs
        measuredResultsOnRACHinterFreq  MeasuredResultsOnRACHinterFreq      OPTIONAL,
        reconfigurationStatusIndicator  ENUMERATED { true }                 OPTIONAL
}

CellUpdate-v6b0ext-IEs ::=          SEQUENCE {
    -- MBMS IEs
```

```
        mbmsSelectedServices            MBMS-SelectedServicesShort          OPTIONAL
}

CellUpdate-v7xyext-IEs ::=          SEQUENCE {
    -- User equipment IEs
        csCallType                      ENUMERATED { speech, video, other, spare }  OPTIONAL,
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL
}

-- **************************************************
--
-- CELL UPDATE CONFIRM
--
-- **************************************************

CellUpdateConfirm ::= CHOICE {
    r3                              SEQUENCE {
        cellUpdateConfirm-r3            CellUpdateConfirm-r3-IEs,
        v3a0NonCriticalExtensions       SEQUENCE {
            cellUpdateConfirm-v3a0ext       CellUpdateConfirm-v3a0ext,
            laterNonCriticalExtensions      SEQUENCE {
                -- Container for additional R99 extensions
                cellUpdateConfirm-r3-add-ext    BIT STRING  OPTIONAL,
                v4b0NonCriticalExtensions       SEQUENCE {
                    cellUpdateConfirm-v4b0ext       CellUpdateConfirm-v4b0ext-IEs,
                    v590NonCriticalExtenstions      SEQUENCE {
                        cellUpdateConfirm-v590ext       CellUpdateConfirm-v590ext-IEs,
                        v5d0NonCriticalExtenstions      SEQUENCE {
                            cellUpdateConfirm-v5d0ext       CellUpdateConfirm-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                cellUpdateConfirm-v690ext       CellUpdateConfirm-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {} OPTIONAL
                            }       OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                cellUpdateConfirm-r4            CellUpdateConfirm-r4-IEs,
                v4d0NonCriticalExtensions       SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    cellUpdateConfirm-r4-add-ext    BIT STRING      OPTIONAL,
                    v590NonCriticalExtenstions      SEQUENCE {
                        cellUpdateConfirm-v590ext       CellUpdateConfirm-v590ext-IEs,
                        v5d0NonCriticalExtenstions      SEQUENCE {
                            cellUpdateConfirm-v5d0ext       CellUpdateConfirm-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                cellUpdateConfirm-v690ext       CellUpdateConfirm-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r5                              SEQUENCE {
                    cellUpdateConfirm-r5            CellUpdateConfirm-r5-IEs,
                    -- Container for adding non critical extensions after freezing REL-6
                    cellUpdateConfirm-r5-add-ext    BIT STRING      OPTIONAL,
                    v5d0NonCriticalExtenstions      SEQUENCE {
                        cellUpdateConfirm-v5d0ext       CellUpdateConfirm-v5d0ext-IEs,
                        v690NonCriticalExtensions       SEQUENCE {
                            cellUpdateConfirm-v690ext       CellUpdateConfirm-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r6                              SEQUENCE {
                        cellUpdateConfirm-r6            CellUpdateConfirm-r6-IEs,
                        -- Container for adding non critical extensions after freezing REL-7
                        cellUpdateConfirm-r6-add-ext    BIT STRING      OPTIONAL,
                        v6b0NonCriticalExtensions       SEQUENCE {
```

```
                        cellUpdateConfirm-v6b0ext       CellUpdateConfirm-v6b0ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r7                              SEQUENCE {
                        cellUpdateConfirm-r7            CellUpdateConfirm-r7-IEs,
                        -- Container for adding non critical extensions after freezing REL-8
                        cellUpdateConfirm-r7-add-ext    BIT STRING      OPTIONAL,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    },
                    criticalExtensions              SEQUENCE {}
                }
            }
        }
    }
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
        rlc-Re-establishIndicatorRb2-3or4       BOOLEAN,
        rlc-Re-establishIndicatorRb5orAbove     BOOLEAN,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rb-InformationReleaseList       RB-InformationReleaseList           OPTIONAL,
        rb-InformationReconfigList      RB-InformationReconfigList          OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList          OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo                OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        modeSpecificTransChInfo         CHOICE {
            fdd                             SEQUENCE {
                -- dummy and dummy2 are not used in this version of the specification, they should
                -- not be sent and if received they should be ignored.
                dummy                           CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonTransChInfo            DL-CommonTransChInfo                OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList           OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList         OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement               OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation                OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List            OPTIONAL
}

CellUpdateConfirm-v3a0ext ::= SEQUENCE {
    -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received the UE behaviour
    -- is unspecified
    new-DSCH-RNTI               DSCH-RNTI                               OPTIONAL
}
```

```
CellUpdateConfirm-v4b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           SSDT-UL                         OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE DL-InformationPerRL-List included in this message
        cell-id-PerRL-List              CellIdentity-PerRL-List         OPTIONAL
}

CellUpdateConfirm-v590ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List    OPTIONAL
}

CellUpdateConfirm-v5d0ext-IEs ::=   SEQUENCE {
    --Radio Bearer IEs
        pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode            OPTIONAL
}
CellUpdateConfirm-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo     OPTIONAL,
        cipheringModeInfo               CipheringModeInfo               OPTIONAL,
        activationTime                  ActivationTime                  OPTIONAL,
        new-U-RNTI                      U-RNTI                          OPTIONAL,
        new-C-RNTI                      C-RNTI                          OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                       OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
        rlc-Re-establishIndicatorRb2-3or4       BOOLEAN,
        rlc-Re-establishIndicatorRb5orAbove BOOLEAN,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfo              OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                    OPTIONAL,
    -- Radio bearer IEs
        rb-InformationReleaseList       RB-InformationReleaseList       OPTIONAL,
        rb-InformationReconfigList      RB-InformationReconfigList-r4   OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList      OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo   OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4         OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList       OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList     OPTIONAL,
        modeSpecificTransChInfo         CHOICE {
            fdd                             SEQUENCE {
                -- dummy and dummy2 are not used in this version of the specification, they should
                -- not be sent and if received they should be ignored.
                dummy                           CPCH-SetID              OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4         OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList       OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4  OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                   OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power           OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r4        OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information    OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation-r4         OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r4     OPTIONAL
}

CellUpdateConfirm-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo     OPTIONAL,
        cipheringModeInfo               CipheringModeInfo               OPTIONAL,
```

```
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
        rlc-Re-establishIndicatorRb2-3or4       BOOLEAN,
        rlc-Re-establishIndicatorRb5orAbove BOOLEAN,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rb-InformationReleaseList       RB-InformationReleaseList           OPTIONAL,
        rb-InformationReconfigList      RB-InformationReconfigList-r5       OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList-r5       OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        modeSpecificTransChInfo         CHOICE {
            fdd                             SEQUENCE {
                -- dummy and dummy2 are not used in this version of the specification, they should
                -- not be sent and if received they should be ignored.
                dummy                           CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r5            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-HSPDSCH-Information          DL-HSPDSCH-Information              OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r5             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r5         OPTIONAL
}

CellUpdateConfirm-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
        rlc-Re-establishIndicatorRb2-3or4       BOOLEAN,
        rlc-Re-establishIndicatorRb5orAbove     BOOLEAN,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rb-InformationReleaseList       RB-InformationReleaseList           OPTIONAL,
        rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
```

```
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
        pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r6      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r6                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r6              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r6           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r6             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r6         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

CellUpdateConfirm-v690ext-IEs ::=   SEQUENCE {
    -- Core network IEs
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- Physical channel IEs
        -- The IE harq-Preamble-Mode should not be used in the r3 and r4 versions of the message
        -- If included in the r3 or r4 version of the message, the UE should ignore the IE
        harq-Preamble-Mode              HARQ-Preamble-Mode                  OPTIONAL,
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL,
        postVerificationPeriod          ENUMERATED { true }                 OPTIONAL,
        dhs-sync                        DHS-Sync                            OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

CellUpdateConfirm-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-InformationPerRL-List-v6b0ext    DL-InformationPerRL-List-v6b0ext    OPTIONAL
}

CellUpdateConfirm-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
        rlc-Re-establishIndicatorRb2-3or4       BOOLEAN,
        rlc-Re-establishIndicatorRb5orAbove     BOOLEAN,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rb-InformationReleaseList       RB-InformationReleaseList           OPTIONAL,
        rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
        pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r7      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r7                     OPTIONAL,
```

```
        ul-EDCH-Information              UL-EDCH-Information-r7              OPTIONAL,
        dl-HSPDSCH-Information           DL-HSPDSCH-Information-r7           OPTIONAL,
        dl-CommonInformation             DL-CommonInformation-r7             OPTIONAL,
        dl-InformationPerRL-List         DL-InformationPerRL-List-r7         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo      MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

-- **************************************************
--
-- CELL UPDATE CONFIRM for CCCH
--
-- **************************************************

CellUpdateConfirm-CCCH ::= CHOICE {
    r3                              SEQUENCE {
        -- User equipment IEs
            u-RNTI                      U-RNTI,
        -- The rest of the message is identical to the one sent on DCCH.
            cellUpdateConfirm-r3                CellUpdateConfirm-r3-IEs,
            laterNonCriticalExtensions      SEQUENCE {
                -- Container for additional R99 extensions
                cellUpdateConfirm-CCCH-r3-add-ext           BIT STRING  OPTIONAL,
                v4b0NonCriticalExtensions       SEQUENCE {
                    cellUpdateConfirm-v4b0ext       CellUpdateConfirm-v4b0ext-IEs,
                    v590NonCriticalExtensions       SEQUENCE {
                        cellUpdateConfirm-v590ext       CellUpdateConfirm-v590ext-IEs,
                        v5d0NonCriticalExtenstions      SEQUENCE {
                            cellUpdateConfirm-v5d0ext       CellUpdateConfirm-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                cellUpdateConfirm-v690ext       CellUpdateConfirm-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {} OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        u-RNTI                          U-RNTI,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                -- The rest of the message is identical to the one sent on DCCH.
                cellUpdateConfirm-r4            CellUpdateConfirm-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    cellUpdateConfirm-CCCH-r4-add-ext       BIT STRING      OPTIONAL,
                    v590NonCriticalExtensions       SEQUENCE {
                        cellUpdateConfirm-v590ext       CellUpdateConfirm-v590ext-IEs,
                        v5d0NonCriticalExtenstions      SEQUENCE {
                            cellUpdateConfirm-v5d0ext       CellUpdateConfirm-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                cellUpdateConfirm-v690ext       CellUpdateConfirm-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r5                              SEQUENCE {
                    cellUpdateConfirm-r5            CellUpdateConfirm-r5-IEs,
                    cellUpdateConfirm-CCCH-r5-add-ext       BIT STRING      OPTIONAL,
                    v5d0NonCriticalExtenstions      SEQUENCE {
                        cellUpdateConfirm-v5d0ext       CellUpdateConfirm-v5d0ext-IEs,
                        v690NonCriticalExtensions       SEQUENCE {
                            cellUpdateConfirm-v690ext       CellUpdateConfirm-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r6                              SEQUENCE {
                        cellUpdateConfirm-r6            CellUpdateConfirm-r6-IEs,
                        cellUpdateConfirm-r6-add-ext    BIT STRING      OPTIONAL,
                        v6b0NonCriticalExtensions       SEQUENCE {
                            cellUpdateConfirm-v6b0ext       CellUpdateConfirm-v6b0ext-IEs,
```

```
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r7                              SEQUENCE {
                        cellUpdateConfirm-r7            CellUpdateConfirm-r7-IEs,
                        cellUpdateConfirm-r7-add-ext    BIT STRING      OPTIONAL,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    },
                    criticalExtensions              SEQUENCE {}
                }
            }
        }
    }
}

-- **************************************************
--
-- COUNTER CHECK
--
-- **************************************************

CounterCheck ::= CHOICE {
    r3                              SEQUENCE {
        counterCheck-r3                 CounterCheck-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            counterCheck-r3-add-ext     BIT STRING  OPTIONAL,
            nonCriticalExtensions       SEQUENCE {} OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

CounterCheck-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Radio bearer IEs
        rb-COUNT-C-MSB-InformationList  RB-COUNT-C-MSB-InformationList
}

-- **************************************************
--
-- COUNTER CHECK RESPONSE
--
-- **************************************************

CounterCheckResponse ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Radio bearer IEs
        rb-COUNT-C-InformationList      RB-COUNT-C-InformationList          OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            counterCheckResponse-r3-add-ext     BIT STRING  OPTIONAL,
            nonCriticalExtensions               SEQUENCE {} OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- DOWNLINK DIRECT TRANSFER
--
-- **************************************************

DownlinkDirectTransfer ::= CHOICE {
    r3                              SEQUENCE {
        downlinkDirectTransfer-r3       DownlinkDirectTransfer-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            downlinkDirectTransfer-r3-add-ext       BIT STRING  OPTIONAL,
            nonCriticalExtensions           SEQUENCE {} OPTIONAL
        }   OPTIONAL
    },
```

```
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity,
        nas-Message                     NAS-Message
}

-- **************************************************
--
-- HANDOVER TO UTRAN COMMAND
--
-- **************************************************


HandoverToUTRANCommand ::= CHOICE {
    r3                              SEQUENCE {
        handoverToUTRANCommand-r3       HandoverToUTRANCommand-r3-IEs,
        nonCriticalExtensions           SEQUENCE {} OPTIONAL
    },
    criticalExtensions              CHOICE {
        r4                              SEQUENCE {
            handoverToUTRANCommand-r4       HandoverToUTRANCommand-r4-IEs,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        },
        criticalExtensions              CHOICE {
            r5                              SEQUENCE {
                handoverToUTRANCommand-r5       HandoverToUTRANCommand-r5-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            },
            criticalExtensions              CHOICE {
                r6                              SEQUENCE {
                    handoverToUTRANCommand-r6       HandoverToUTRANCommand-r6-IEs,
                    v6b0NonCriticalExtensions       SEQUENCE {
                        handoverToUTRANCommand-v6b0ext  HandoverToUTRANCommand-v6b0ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              SEQUENCE {}
            }
        }
    }
}

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        new-U-RNTI                      U-RNTI-Short,
        -- dummy is not used in this version of specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           ActivationTime                      OPTIONAL,
        cipheringAlgorithm              CipheringAlgorithm                  OPTIONAL,
    -- Radio bearer IEs
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
                srb-InformationSetupList        SRB-InformationSetupList,
                rab-InformationSetupList        RAB-InformationSetupList            OPTIONAL,
                ul-CommonTransChInfo            UL-CommonTransChInfo,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList,
                dl-CommonTransChInfo            DL-CommonTransChInfo,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList,
                ul-DPCH-Info                    UL-DPCH-Info,
                modeSpecificInfo                CHOICE {
                    fdd                             SEQUENCE {
                        -- dummy and dummy2 are not used in this version of specification,
                        -- they should not be sent and if received they should be ignored.
                        dummy                           DL-PDSCH-Information OPTIONAL,
                        dummy2                          CPCH-SetInfo        OPTIONAL
                    },
                    tdd                             NULL
                },
                dl-CommonInformation            DL-CommonInformation,
```

```
                dl-InformationPerRL-List        DL-InformationPerRL-List,
                frequencyInfo                   FrequencyInfo
            },
            preconfiguration                SEQUENCE {
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity
                    }
                },
                rab-Info                        RAB-Info-Post       OPTIONAL,
                modeSpecificInfo                CHOICE {
                    fdd                             SEQUENCE {
                        ul-DPCH-Info                    UL-DPCH-InfoPostFDD,
                        dl-CommonInformationPost        DL-CommonInformationPost,
                        dl-InformationPerRL-List        DL-InformationPerRL-ListPostFDD,
                        frequencyInfo                   FrequencyInfoFDD
                    },
                    tdd                             SEQUENCE {
                        ul-DPCH-Info                    UL-DPCH-InfoPostTDD,
                        dl-CommonInformationPost        DL-CommonInformationPost,
                        dl-InformationPerRL             DL-InformationPerRL-PostTDD,
                        frequencyInfo                   FrequencyInfoTDD,
                        primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                    }
                }
            }
        },
    -- Physical channel IEs
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power
}

HandoverToUTRANCommand-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        new-U-RNTI                      U-RNTI-Short,
        cipheringAlgorithm              CipheringAlgorithm                  OPTIONAL,
    -- Radio bearer IEs
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
                srb-InformationSetupList        SRB-InformationSetupList,
                rab-InformationSetupList        RAB-InformationSetupList-r4         OPTIONAL,
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4,
                ul-DPCH-Info                    UL-DPCH-Info-r4,
                modeSpecificInfo                CHOICE {
                    fdd                             SEQUENCE {
                        -- dummy and dummy2 are not used in this version of specification,
                        -- they should not be sent and if received they should be ignored.
                        dummy                           DL-PDSCH-Information OPTIONAL,
                        dummy2                          CPCH-SetInfo        OPTIONAL
                    },
                    tdd                             NULL
                },
                dl-CommonInformation            DL-CommonInformation-r4,
                dl-InformationPerRL-List        DL-InformationPerRL-List-r4,
                frequencyInfo                   FrequencyInfo
            },
            preconfiguration                SEQUENCE {
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r4
                    }
                },
                rab-Info                        RAB-Info-Post       OPTIONAL,
                modeSpecificInfo                CHOICE {
                    fdd                             SEQUENCE {
```

```
                        ul-DPCH-Info                    UL-DPCH-InfoPostFDD,
                        dl-CommonInformationPost        DL-CommonInformationPost,
                        dl-InformationPerRL-List        DL-InformationPerRL-ListPostFDD,
                        frequencyInfo                   FrequencyInfoFDD
                    },
                    tdd                             CHOICE {
                        tdd384                          SEQUENCE {
                            ul-DPCH-Info                    UL-DPCH-InfoPostTDD,
                            dl-InformationPerRL             DL-InformationPerRL-PostTDD,
                            frequencyInfo                   FrequencyInfoTDD,
                            primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                        },
                        tdd128                          SEQUENCE {
                            ul-DPCH-Info                    UL-DPCH-InfoPostTDD-LCR-r4,
                            dl-InformationPerRL             DL-InformationPerRL-PostTDD-LCR-r4,
                            frequencyInfo                   FrequencyInfoTDD,
                            primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                        }
                    }
                }
            }
        },
    -- Physical channel IEs
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power
}

HandoverToUTRANCommand-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        new-U-RNTI                      U-RNTI-Short,
        cipheringAlgorithm              CipheringAlgorithm                  OPTIONAL,
    -- Radio bearer IEs
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
                srb-InformationSetupList        SRB-InformationSetupList-r5,
                rab-InformationSetupList        RAB-InformationSetupList-r5         OPTIONAL,
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5,
                ul-DPCH-Info                    UL-DPCH-Info-r5,
                modeSpecificInfo                CHOICE {
                    fdd                             SEQUENCE {
                        -- dummy and dummy2 are not used in this version of specification,
                        -- they should not be sent and if received they should be ignored.
                        dummy                           DL-PDSCH-Information OPTIONAL,
                        dummy2                          CPCH-SetInfo        OPTIONAL
                    },
                    tdd                             NULL
                },
                dl-CommonInformation            DL-CommonInformation-r4,
                dl-InformationPerRL-List        DL-InformationPerRL-List-r5,
                frequencyInfo                   FrequencyInfo
            },
            preconfiguration                SEQUENCE {
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r5
                    }
                },
                rab-Info                        RAB-Info-Post       OPTIONAL,
                modeSpecificInfo                CHOICE {
                    fdd                             SEQUENCE {
                        ul-DPCH-Info                    UL-DPCH-InfoPostFDD,
                        dl-CommonInformationPost        DL-CommonInformationPost,
                        dl-InformationPerRL-List        DL-InformationPerRL-ListPostFDD,
                        frequencyInfo                   FrequencyInfoFDD
                    },
                    tdd                             CHOICE {
                        tdd384                          SEQUENCE {
                            ul-DPCH-Info                    UL-DPCH-InfoPostTDD,
                            dl-InformationPerRL             DL-InformationPerRL-PostTDD,
                            frequencyInfo                   FrequencyInfoTDD,
```

```
                        primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                    },
                    tdd128                          SEQUENCE {
                        ul-DPCH-Info                    UL-DPCH-InfoPostTDD-LCR-r4,
                        dl-InformationPerRL             DL-InformationPerRL-PostTDD-LCR-r4,
                        frequencyInfo                   FrequencyInfoTDD,
                        primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                    }
                }
            }
        }
    },
    -- Physical channel IEs
    maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power
}

HandoverToUTRANCommand-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
    new-U-RNTI                      U-RNTI-Short,
    cipheringAlgorithm              CipheringAlgorithm                  OPTIONAL,
    -- Radio bearer IEs
    -- Specification mode information
    specificationMode               CHOICE {
        complete                        SEQUENCE {
            srb-InformationSetupList        SRB-InformationSetupList-r6,
            rab-InformationSetupList        RAB-InformationSetupList-r6     OPTIONAL,
            ul-CommonTransChInfo            UL-CommonTransChInfo-r4,
            ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r6,
            dl-CommonTransChInfo            DL-CommonTransChInfo-r4,
            dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5,
            ul-DPCH-Info                    UL-DPCH-Info-r6,
            ul-EDCH-Information             UL-EDCH-Information-r6          OPTIONAL,
            dl-HSPDSCH-Information          DL-HSPDSCH-Information-r6       OPTIONAL,
            dl-CommonInformation            DL-CommonInformation-r6,
            dl-InformationPerRL-List        DL-InformationPerRL-List-r6,
            frequencyInfo                   FrequencyInfo
        },
        preconfiguration                SEQUENCE {
            -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
            -- one for the FDD only elements and one for the TDD only elements, so that one
            -- FDD/TDD choice in this level is sufficient.
            preConfigMode                   CHOICE {
                predefinedConfigIdentity        PredefinedConfigIdentity,
                defaultConfig                   SEQUENCE {
                    defaultConfigMode               DefaultConfigMode,
                    defaultConfigIdentity           DefaultConfigIdentity-r6
                }
            },
            rab-Info                        RAB-Info-Post       OPTIONAL,
            modeSpecificInfo                CHOICE {
                fdd                             SEQUENCE {
                    ul-DPCH-Info                    UL-DPCH-InfoPostFDD,
                    dl-CommonInformationPost        DL-CommonInformationPost,
                    dl-InformationPerRL-List        DL-InformationPerRL-ListPostFDD,
                    frequencyInfo                   FrequencyInfoFDD
                },
                tdd                             CHOICE {
                    tdd384                          SEQUENCE {
                        ul-DPCH-Info                    UL-DPCH-InfoPostTDD,
                        dl-InformationPerRL             DL-InformationPerRL-PostTDD,
                        frequencyInfo                   FrequencyInfoTDD,
                        primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                    },
                    tdd128                          SEQUENCE {
                        ul-DPCH-Info                    UL-DPCH-InfoPostTDD-LCR-r4,
                        dl-InformationPerRL             DL-InformationPerRL-PostTDD-LCR-r4,
                        frequencyInfo                   FrequencyInfoTDD,
                        primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                    }
                }
            }
        }
    },
    -- Physical channel IEs
    maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power
}

HandoverToUTRANCommand-v6b0ext-IEs ::= SEQUENCE {
```

```
    ue-hspa-identities                      UE-HSPA-Identities-r6   OPTIONAL
}

HandoverToUTRANCommand-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        new-U-RNTI                      U-RNTI-Short,
        cipheringAlgorithm              CipheringAlgorithm-r7                   OPTIONAL,
    -- Radio bearer IEs
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
                srb-InformationSetupList        SRB-InformationSetupList-r6,
                rab-InformationSetupList        RAB-InformationSetupList-r6     OPTIONAL,
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r7,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5,
                ul-DPCH-Info                    UL-DPCH-Info-r7,
                ul-EDCH-Information-r7          UL-EDCH-Information-r7          OPTIONAL,
                dl-CommonInformation            DL-CommonInformation-r4,
                dl-InformationPerRL-List        DL-InformationPerRL-List-r7,
                frequencyInfo                   FrequencyInfo
            },
            preconfiguration                SEQUENCE {
                -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
                -- one for the FDD only elements and one for the TDD only elements, so that one
                -- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r6
                    }
                },
                rab-Info                        RAB-Info-Post       OPTIONAL,
                modeSpecificInfo                CHOICE {
                    fdd                             SEQUENCE {
                        ul-DPCH-Info                    UL-DPCH-InfoPostFDD,
                        dl-CommonInformationPost        DL-CommonInformationPost,
                        dl-InformationPerRL-List        DL-InformationPerRL-ListPostFDD,
                        frequencyInfo                   FrequencyInfoFDD
                    },
                    tdd                             CHOICE {
                        tdd384                          SEQUENCE {
                            ul-DPCH-Info                    UL-DPCH-InfoPostTDD,
                            dl-InformationPerRL             DL-InformationPerRL-PostTDD,
                            frequencyInfo                   FrequencyInfoTDD,
                            primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                        },
                        tdd128                          SEQUENCE {
                            ul-DPCH-Info                    UL-DPCH-Info-r7,
                            dl-InformationPerRL             DL-InformationPerRL-PostTDD-LCR-r4,
                            frequencyInfo                   FrequencyInfoTDD,
                            primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                        },
                        tdd768                          SEQUENCE {
                            ul-DPCH-Info                    UL-DPCH-Info-r7,
                            dl-InformationPerRL             DL-InformationPerRL-List-r7,
                            frequencyInfo                   FrequencyInfoTDD,
                            primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power
                        }
                    }
                }
            }
        },
    -- Physical channel IEs
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power
}

-- **************************************************
--
-- HANDOVER TO UTRAN COMPLETE
--
-- **************************************************

HandoverToUTRANComplete ::= SEQUENCE {
    --TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
```

```
    -- TABULAR: startList is conditional on history.
        startList                       STARTList                           OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                      OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            handoverToUTRANComplete-r3-add-ext      BIT STRING  OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- INITIAL DIRECT TRANSFER
--
-- **************************************************

InitialDirectTransfer ::= SEQUENCE {
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity,
        intraDomainNasNodeSelector      IntraDomainNasNodeSelector,
        nas-Message                     NAS-Message,
    -- Measurement IEs
        measuredResultsOnRACH           MeasuredResultsOnRACH               OPTIONAL,
        v3a0NonCriticalExtensions       SEQUENCE {
        initialDirectTransfer-v3a0ext   InitialDirectTransfer-v3a0ext,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            initialDirectTransfer-r3-add-ext        BIT STRING  OPTIONAL,
                v590NonCriticalExtensions       SEQUENCE {
                    initialDirectTransfer-v590ext   InitialDirectTransfer-v590ext,
                    v690NonCriticalExtensions       SEQUENCE {
                        initialDirectTransfer-v690ext   InitialDirectTransfer-v690ext-IEs,
                        v7xyNonCriticalExtensions       SEQUENCE {
                            initialDirectTransfer-v7xyext   InitialDirectTransfer-v7xyext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }   OPTIONAL
}

InitialDirectTransfer-v3a0ext ::= SEQUENCE {
    -- start-value shall always be included in this version of the protocol
    start-Value                     START-Value                         OPTIONAL
}
InitialDirectTransfer-v590ext ::= SEQUENCE {
    establishmentCause      EstablishmentCause  OPTIONAL
}

InitialDirectTransfer-v690ext-IEs ::= SEQUENCE {
    -- Core network IEs
        plmn-Identity                   PLMN-Identity                       OPTIONAL,
    -- Measurement IEs
        measuredResultsOnRACHinterFreq  MeasuredResultsOnRACHinterFreq      OPTIONAL,
    -- MBMS IEs
        mbms-JoinedInformation          MBMS-JoinedInformation-r6           OPTIONAL
}

InitialDirectTransfer-v7xyext-IEs ::= SEQUENCE {
        csCallType                      ENUMERATED { speech, video, other, spare }  OPTIONAL
}

-- **************************************************
--
-- HANDOVER FROM UTRAN COMMAND
--
-- **************************************************

HandoverFromUTRANCommand-GSM ::= CHOICE {
    r3                              SEQUENCE {
        handoverFromUTRANCommand-GSM-r3
                                    HandoverFromUTRANCommand-GSM-r3-IEs,
        -- UTRAN should not include the IE laterNonCriticalExtensions when it sets the IE
        -- gsm-message included in handoverFromUTRANCommand-GSM-r3 to single-GSM-Message. The UE
        -- behaviour upon receiving a message with this combination of IE values is unspecified.
        laterNonCriticalExtensions      SEQUENCE {
```

```
            -- Container for additional R99 extensions
            handoverFromUTRANCommand-GSM-r3-add-ext     BIT STRING  OPTIONAL,
            -- UTRAN may apply the r3 version of the message to perform PS handover
            -- for a single RAB only
            v690NonCriticalExtensions       SEQUENCE {
                handoverFromUTRANCommand-GSM-v690ext    HandoverFromUTRANCommand-GSM-v690ext-IEs,
                nonCriticalExtensions           SEQUENCE {} OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r6                              SEQUENCE {
                handoverFromUTRANCommand-GSM-r6     HandoverFromUTRANCommand-GSM-r6-IEs,
                handoverFromUTRANCommand-GSM-r6-add-ext     BIT STRING  OPTIONAL,
                nonCriticalExtensions           SEQUENCE {} OPTIONAL
            },
            criticalExtensions              SEQUENCE {}
        }
    }
}

HandoverFromUTRANCommand-GSM-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        activationTime                  ActivationTime                      OPTIONAL,
    -- Radio bearer IEs
        toHandoverRAB-Info              RAB-Info                            OPTIONAL,
    -- Measurement IEs
        frequency-band                  Frequency-Band,
    -- Other IEs
        gsm-message                     CHOICE {
            -- In the single-GSM-Message case the following rules apply:
            -- 1> the GSM message directly follows the basic production; the final padding that
            --    results when PER encoding the abstract syntax value is removed prior to appending
            --    the GSM message.
            -- 2> the RRC message excluding the GSM part, does not contain a length determinant;
            --    there is no explicit parameter indicating the size of the included GSM message.
            -- 3> depending on need, final padding (all "0"s) is added to ensure the final result
            --    comprises a full number of octets
            single-GSM-Message              SEQUENCE {},
            gsm-MessageList                 SEQUENCE {
                gsm-Messages                    GSM-MessageList
            }
        }
}

HandoverFromUTRANCommand-GSM-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        activationTime                  ActivationTime                      OPTIONAL,
    -- Radio bearer IEs
        toHandoverRAB-Info              RAB-InformationList-r6              OPTIONAL,
    -- Measurement IEs
        frequency-band                  Frequency-Band,
    -- Other IEs
        gsm-message                     CHOICE {
            -- In the single-GSM-Message case the following rules apply:
            -- 1> the GSM message directly follows the basic production; the final padding that
            --    results when PER encoding the abstract syntax value is removed prior to appending
            --    the GSM message.
            -- 2> the RRC message excluding the GSM part, does not contain a length determinant;
            --    there is no explicit parameter indicating the size of the included GSM message.
            -- 3> depending on need, final padding (all "0"s) is added to ensure the final result
            --    comprises a full number of octets
            single-GSM-Message              SEQUENCE {},
            gsm-MessageList                 SEQUENCE {
                gsm-Messages                    GSM-MessageList
            }
        },
        geran-SystemInfoType                CHOICE  {
            sI                                  GERAN-SystemInformation,
            pSI                                 GERAN-SystemInformation
        }       OPTIONAL
}

HandoverFromUTRANCommand-GSM-v690ext-IEs ::= SEQUENCE {
        geran-SystemInfoType                CHOICE  {
```

```
            sI                                  GERAN-SystemInformation,
            pSI                                 GERAN-SystemInformation
        }       OPTIONAL
}

HandoverFromUTRANCommand-GERANIu ::= SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    handoverFromUTRANCommand-GERANIu    CHOICE {
        r5                                  SEQUENCE {
            handoverFromUTRANCommand-GERANIu-r5
                                            HandoverFromUTRANCommand-GERANIu-r5-IEs,
            -- UTRAN should not include the IE nonCriticalExtensions when it sets
            -- the IE geranIu-message included in handoverFromUTRANCommand-GERANIu-r5 to
            -- single-GERANIu-Message
            -- The UE behaviour upon receiving a message including this combination of IE values is
            -- not specified
            nonCriticalExtensions           SEQUENCE {} OPTIONAL
        },
        later-than-r5                   SEQUENCE {
            criticalExtensions              SEQUENCE {}
        }
    }
}

HandoverFromUTRANCommand-GERANIu-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        activationTime                  ActivationTime                      OPTIONAL,
    -- Measurement IEs
        frequency-Band                  Frequency-Band,
    -- Other IEs
        geranIu-Message                     CHOICE {
            -- In the single-GERANIu-Message case the following rules apply:
            -- 1> the GERAN Iu message directly follows the basic production; the final padding that
            --    results when PER encoding the abstract syntax value is removed prior to appending
            --    the GERAN Iu message.
            -- 2> the RRC message excluding the GERAN Iu part does not contain a length determinant;
--    there is no explicit parameter indicating the size of the included GERAN Iu
--    message.
            -- 3> depending on need, final padding (all "0"s) is added to ensure the final result
            --    comprises a full number of octets.
            single-GERANIu-Message          SEQUENCE {},
            geranIu-MessageList             SEQUENCE {
                geranIu-Messages                GERANIu-MessageList
            }
        }
}

HandoverFromUTRANCommand-CDMA2000 ::= CHOICE {
    r3                              SEQUENCE {
        handoverFromUTRANCommand-CDMA2000-r3
                                        HandoverFromUTRANCommand-CDMA2000-r3-IEs,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            handoverFromUTRANCommand-CDMA2000-r3-add-ext
                                                BIT STRING      OPTIONAL,
            nonCriticalExtensions               SEQUENCE {}     OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        activationTime                  ActivationTime                      OPTIONAL,
    -- Radio bearer IEs
        toHandoverRAB-Info              RAB-Info                            OPTIONAL,
    -- Other IEs
        cdma2000-MessageList            CDMA2000-MessageList
}

-- **************************************************
--
-- HANDOVER FROM UTRAN FAILURE
--
```

```
-- **************************************************

HandoverFromUTRANFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Other IEs
        interRAT-HO-FailureCause        InterRAT-HO-FailureCause            OPTIONAL,
        -- In case the interRATMessage to be transferred is for GERAN Iu mode, the
        -- message should be placed in the HandoverFromUtranFailure-v590ext-IEs
        -- non-critical extension container.
        interRATMessage                 CHOICE {
            gsm                             SEQUENCE {
                gsm-MessageList                     GSM-MessageList
            },
            cdma2000                            SEQUENCE {
                cdma2000-MessageList                CDMA2000-MessageList
            }
        }               OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            handoverFromUTRANFailure-r3-add-ext     BIT STRING  OPTIONAL,
            v590NonCriticalExtensions       SEQUENCE {
                handoverFromUTRANFailure-v590ext    HandoverFromUtranFailure-v590ext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

HandoverFromUtranFailure-v590ext-IEs ::= SEQUENCE {
    geranIu-MessageList                     GERANIu-MessageList         OPTIONAL
}

-- **************************************************
--
-- INTER RAT HANDOVER INFO
--
-- **************************************************

InterRATHandoverInfo ::= SEQUENCE {
    -- This structure is defined for historical reasons, backward compatibility with 44.018
    predefinedConfigStatusList      CHOICE {
        absent                          NULL,
        present                         PredefinedConfigStatusList
    },
    uE-SecurityInformation          CHOICE {
        absent                          NULL,
        present                         UE-SecurityInformation
    },
    ue-CapabilityContainer          CHOICE {
        absent                          NULL,
        -- present is an octet aligned string containing IE UE-RadioAccessCapabilityInfo
        present                         OCTET STRING (SIZE (0..63))
    },
    -- Non critical extensions
    v390NonCriticalExtensions       CHOICE {
        absent                          NULL,
        present                         SEQUENCE {
            interRATHandoverInfo-v390ext    InterRATHandoverInfo-v390ext-IEs,
            v3a0NonCriticalExtensions       SEQUENCE  {
                interRATHandoverInfo-v3a0ext    InterRATHandoverInfo-v3a0ext-IEs,
                laterNonCriticalExtensions      SEQUENCE {
                    interRATHandoverInfo-v3d0ext    InterRATHandoverInfo-v3d0ext-IEs,
                    -- Container for additional R99 extensions
                    interRATHandoverInfo-r3-add-ext     BIT STRING
                                (CONTAINING InterRATHandoverInfo-r3-add-ext-IEs)    OPTIONAL,
                    v3g0NonCriticalExtensions           SEQUENCE {
                        interRATHandoverInfo-v3g0ext    InterRATHandoverInfo-v3g0ext-IEs,
                        v4b0NonCriticalExtensions       SEQUENCE {
                            interRATHandoverInfo-v4b0ext    InterRATHandoverInfo-v4b0ext-IEs,
                            v4d0NonCriticalExtensions       SEQUENCE {
                                interRATHandoverInfo-v4d0ext    InterRATHandoverInfo-v4d0ext-IEs,
                                -- Reserved for future non critical extension
                                v590NonCriticalExtensions       SEQUENCE {
                                    interRATHandoverInfo-v590ext
                                                                    InterRATHandoverInfo-v590ext-IEs,
                                    v690NonCriticalExtensions       SEQUENCE {
                                        interRATHandoverInfo-v690ext
                                                                    InterRATHandoverInfo-v690ext-IEs,
```

```
                                        v6b0NonCriticalExtensions       SEQUENCE {
                                            interRATHandoverInfo-v6b0ext
                                                                InterRATHandoverInfo-v6b0ext-IEs,
                                            nonCriticalExtensions           SEQUENCE {} OPTIONAL
                                        }   OPTIONAL
                                    }   OPTIONAL
                                }   OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }
        }
}

InterRATHandoverInfo-v390ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v380ext    UE-RadioAccessCapability-v380ext        OPTIONAL,
        dl-PhysChCapabilityFDD-v380ext      DL-PhysChCapabilityFDD-v380ext
}

InterRATHandoverInfo-v3a0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v3a0ext    UE-RadioAccessCapability-v3a0ext        OPTIONAL
}

InterRATHandoverInfo-v3d0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        uESpecificBehaviourInformation1interRAT     UESpecificBehaviourInformation1interRAT
    OPTIONAL
}

InterRATHandoverInfo-v3g0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v3g0ext    UE-RadioAccessCapability-v3g0ext        OPTIONAL
}

InterRATHandoverInfo-r3-add-ext-IEs ::= SEQUENCE {
        interRATHandoverInfo-v690ext1       InterRATHandoverInfo-v690ext1-IEs,
        nonCriticalExtensions               SEQUENCE {}     OPTIONAL
}

InterRATHandoverInfo-v4b0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        accessStratumReleaseIndicator       AccessStratumReleaseIndicator
}

InterRATHandoverInfo-v4d0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
    tdd128-RF-Capability                RadioFrequencyBandTDDList       OPTIONAL
}

InterRATHandoverInfo-v590ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        predefinedConfigStatusListComp      PredefinedConfigStatusListComp          OPTIONAL,
        ue-RadioAccessCapabilityComp        UE-RadioAccessCapabilityComp            OPTIONAL
}

InterRATHandoverInfo-v690ext1-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v650ext        UE-RadioAccessCapability-v650ext    OPTIONAL
}

InterRATHandoverInfo-v690ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-SecurityInformation2             UE-SecurityInformation2                 OPTIONAL,
        ue-RadioAccessCapabilityComp        UE-RadioAccessCapabilityComp-ext        OPTIONAL,
        ue-RadioAccessCapabilityComp2       UE-RadioAccessCapabilityComp2
}

InterRATHandoverInfo-v6b0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        supportForSIB11bis                  ENUMERATED { true }         OPTIONAL
}

InterRATHandoverInfo-v7xyext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v7xyext    UE-RadioAccessCapability-v7xyext        OPTIONAL,
```

```
        ue-RadioAccessCapabilityComp        UE-RadioAccessCapabilityComp-r7         OPTIONAL
}

-- **************************************************
--
-- MEASUREMENT CONTROL
--
-- **************************************************

MeasurementControl ::= CHOICE {
    -- The Rel-4 functionality of UE Positioning OTDOA AssistanceData TDD is only available
    -- in the later-than-r3 branch of this message (i.e. through the use of the IE
    -- ue-Positioning-OTDOA-AssistanceData-r4)
    r3                              SEQUENCE {
        measurementControl-r3           MeasurementControl-r3-IEs,
        v390nonCriticalExtensions       SEQUENCE {
            measurementControl-v390ext      MeasurementControl-v390ext,
            v3a0NonCriticalExtensions           SEQUENCE {
                measurementControl-v3a0ext          MeasurementControl-v3a0ext,
                laterNonCriticalExtensions      SEQUENCE {
                    -- Container for additional R99 extensions
                    measurementControl-r3-add-ext       BIT STRING  OPTIONAL,
                    v4b0NonCriticalExtensions           SEQUENCE{
                        -- The content of the v4b0 non-critical extension has been removed. If sent
                        -- to a UE of AS release 4, the UE behaviour is unspecified. A UE of AS
                        -- release 5 onward shall comply with the v4b0 and later extensions in this
                        -- branch of the message.
                        v590NonCriticalExtensions       SEQUENCE {
                            measurementControl-v590ext      MeasurementControl-v590ext-IEs,
                            v5b0NonCriticalExtensions       SEQUENCE {
                                measurementControl-v5b0ext      MeasurementControl-v5b0ext-IEs,
                                v7xyNonCriticalExtensions       SEQUENCE {
                                    measurementControl-v7xyext      MeasurementControl-v7xyext-IEs,
                                    nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                                }                                   OPTIONAL
                            }                                   OPTIONAL
                        }                                   OPTIONAL
                    }                                   OPTIONAL
                }                                   OPTIONAL
            }                                   OPTIONAL
        }                                   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                measurementControl-r4           MeasurementControl-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    measurementControl-r4-add-ext       BIT STRING      OPTIONAL,
                    v590NonCriticalExtensions       SEQUENCE{
                        measurementControl-v590ext      MeasurementControl-v590ext-IEs,
                        v5b0NonCriticalExtensions       SEQUENCE {
                            measurementControl-v5b0ext      MeasurementControl-v5b0ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
                                measurementControl-v7xyext      MeasurementControl-v7xyext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            later-than-r4                   SEQUENCE {
                -- Most significant part of "RRC transaction identifier" (MSP),
                -- "RRC transaction identifier" = rrc-TransactionIdentifier-MSP * 4 +
                -- rrc-TransactionIdentifier
                rrc-TransactionIdentifier-MSP       RRC-TransactionIdentifier,
                criticalExtensions              CHOICE {
                    r6                              SEQUENCE {
                        measurementControl-r6           MeasurementControl-r6-IEs,
                        v6a0NonCriticalExtensions       SEQUENCE {
                            measurementControl-v6a0ext      MeasurementControl-v6a0ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
                                measurementControl-v7xyext      MeasurementControl-v7xyext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    },
```

```
                    criticalExtensions              SEQUENCE {}
                }
            }
        }
    }
}

MeasurementControl-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Measurement IEs
        measurementIdentity     MeasurementIdentity,
        -- TABULAR: The measurement type is included in MeasurementCommand.
        measurementCommand              MeasurementCommand,
        measurementReportingMode        MeasurementReportingMode            OPTIONAL,
        additionalMeasurementList       AdditionalMeasurementID-List        OPTIONAL,
    -- Physical channel IEs
        dpch-CompressedModeStatusInfo   DPCH-CompressedModeStatusInfo       OPTIONAL
}

MeasurementControl-v390ext ::= SEQUENCE {
        ue-Positioning-Measurement-v390ext      UE-Positioning-Measurement-v390ext  OPTIONAL
}

MeasurementControl-v3a0ext ::= SEQUENCE {
    sfn-Offset-Validity             SFN-Offset-Validity     OPTIONAL
}

MeasurementControl-r4-IEs ::= SEQUENCE {
    -- Measurement IEs
        measurementIdentity     MeasurementIdentity,
        -- TABULAR: The measurement type is included in measurementCommand.
        measurementCommand              MeasurementCommand-r4,
        measurementReportingMode        MeasurementReportingMode            OPTIONAL,
        additionalMeasurementList       AdditionalMeasurementID-List        OPTIONAL,
    -- Physical channel IEs
        dpch-CompressedModeStatusInfo   DPCH-CompressedModeStatusInfo       OPTIONAL
}

MeasurementControl-v590ext-IEs ::= SEQUENCE {
    measurementCommand-v590ext          CHOICE {
        -- the choice "intra-frequency" shall be used for the case of intra-frequency measurement,
        -- as well as when intra-frequency events are configured for inter-frequency measurement
        intra-frequency                     Intra-FreqEventCriteriaList-v590ext,
        inter-frequency                     Inter-FreqEventCriteriaList-v590ext
    }       OPTIONAL,
    intraFreqReportingCriteria-1b-r5        IntraFreqReportingCriteria-1b-r5    OPTIONAL,
    intraFreqEvent-1d-r5                    IntraFreqEvent-1d-r5                OPTIONAL,
    -- most significant part of "RRC transaction identifier" (MSP),
    -- "RRC transaction identifier" = rrc-TransactionIdentifier-MSP-v590ext * 4 +
    -- rrc-TransactionIdentifier
    rrc-TransactionIdentifier-MSP-v590ext   RRC-TransactionIdentifier
}

MeasurementControl-v5b0ext-IEs ::=  SEQUENCE {
    interRATCellInfoIndication          InterRATCellInfoIndication          OPTIONAL
}

MeasurementControl-r6-IEs ::= SEQUENCE {
    -- Measurement IEs
        measurementIdentity     MeasurementIdentity,
        -- TABULAR: The measurement type is included in measurementCommand.
        measurementCommand              MeasurementCommand-r6,
        measurementReportingMode        MeasurementReportingMode            OPTIONAL,
        additionalMeasurementList       AdditionalMeasurementID-List        OPTIONAL,
    -- Physical channel IEs
        dpch-CompressedModeStatusInfo   DPCH-CompressedModeStatusInfo       OPTIONAL
}

MeasurementControl-v6a0ext-IEs ::= SEQUENCE {
    intraFreqReportingCriteria-1b-r5        IntraFreqReportingCriteria-1b-r5    OPTIONAL
}

MeasurementControl-v7xyext-IEs ::=  SEQUENCE {
    ue-Positioning-Measurement-v7xyext      UE-Positioning-Measurement-v7xyext,
    ue-Positioning-OTDOA-AssistanceData-UEB-ext
                                        UE-Positioning-OTDOA-AssistanceData-UEB-ext     OPTIONAL
}
```

```
-- **************************************************
--
-- MEASUREMENT CONTROL FAILURE
--
-- **************************************************

MeasurementControlFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            measurementControlFailure-r3-add-ext        BIT STRING      OPTIONAL,
            v590NonCriticalExtensions       SEQUENCE {
                measurementControlFailure-v590ext       MeasurementControlFailure-v590ext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

MeasurementControlFailure-v590ext-IEs ::= SEQUENCE {
    -- most significant part of "RRC transaction identifier" (MSP),
    -- "RRC transaction identifier" = rrc-TransactionIdentifier-MSP-v590ext * 4 +
    -- rrc-TransactionIdentifier
    -- If the rrc-TransactionIdentifier-MSP-v590ext was not received in the MEASUREMENT CONTROL
    -- message, then the rrc-TransactionIdentifier-MSP-v590ext shall be set to zero
    rrc-TransactionIdentifier-MSP-v590ext   RRC-TransactionIdentifier
}

-- **************************************************
--
-- MEASUREMENT REPORT
--
-- **************************************************

MeasurementReport ::= SEQUENCE {
    -- Measurement IEs
        measurementIdentity     MeasurementIdentity,
        measuredResults                 MeasuredResults                     OPTIONAL,
        measuredResultsOnRACH           MeasuredResultsOnRACH               OPTIONAL,
        additionalMeasuredResults       MeasuredResultsList                 OPTIONAL,
        eventResults                    EventResults                        OPTIONAL,
    -- Non-critical extensions
        v390nonCriticalExtensions           SEQUENCE {
            measurementReport-v390ext       MeasurementReport-v390ext,
            laterNonCriticalExtensions      SEQUENCE {
                -- Container for additional R99 extensions
                measurementReport-r3-add-ext        BIT STRING      OPTIONAL,
                v4b0NonCriticalExtensions       SEQUENCE {
                    measurementReport-v4b0ext       MeasurementReport-v4b0ext-IEs,
                    -- Extension mechanism for non-Rel4 information
                    v590NonCriticalExtensions   SEQUENCE {
                        measurementReport-v590ext       MeasurementReport-v590ext-IEs,
                        v5b0NonCriticalExtensions       SEQUENCE {
                            measurementReport-v5b0ext       MeasurementReport-v5b0ext-IEs,
                            v690NonCriticalExtensions           SEQUENCE {
                                measurementReport-v690ext       MeasurementReport-v690ext-IEs,

                                v7xyNonCriticalExtensions       SEQUENCE {
                                    measurementReport-v7xyext       MeasurementReport-v7xyext-IEs,
                                    nonCriticalExtensions           SEQUENCE {}             OPTIONAL
                                }       OPTIONAL
                            }       OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
}

MeasurementReport-v390ext ::= SEQUENCE {
        measuredResults-v390ext         MeasuredResults-v390ext             OPTIONAL
}

MeasurementReport-v4b0ext-IEs ::= SEQUENCE {
    interFreqEventResults-LCR       InterFreqEventResults-LCR-r4-ext        OPTIONAL,
```

```
    -- additionalMeasuredResults-LCR shall contain measurement results and additional measurement
    -- results list.
    additionalMeasuredResults-LCR   MeasuredResultsList-LCR-r4-ext          OPTIONAL,
    -- dummy is not used in this version of the specification. It should not be sent and
    -- if received it should be ignored.
    dummy                           PrimaryCPICH-Info                       OPTIONAL
}

MeasurementReport-v590ext-IEs ::= SEQUENCE {
    measuredResults-v590ext             MeasuredResults-v590ext             OPTIONAL
}

MeasurementReport-v5b0ext-IEs ::=   SEQUENCE {
    interRATCellInfoIndication          InterRATCellInfoIndication          OPTIONAL
}

MeasurementReport-v690ext-IEs ::= SEQUENCE {
    measuredResultsOnRACHinterFreq      MeasuredResultsOnRACHinterFreq      OPTIONAL
}

MeasurementReport-v7xyext-IEs ::= SEQUENCE {
    velocityEstimate                    VelocityEstimate                    OPTIONAL,
    ue-InternalMeasuredResults          UE-InternalMeasuredResults-r7       OPTIONAL
}

-- **************************************************
--
-- PAGING TYPE 1
--
-- **************************************************

PagingType1 ::= SEQUENCE {
    -- User equipment IEs
        pagingRecordList                PagingRecordList                    OPTIONAL,
    -- Other IEs
        bcch-ModificationInfo           BCCH-ModificationInfo               OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            pagingType1-r3-add-ext          BIT STRING      OPTIONAL,
            v590NonCriticalExtensions       SEQUENCE {
                pagingType1-v590ext             PagingType1-v590ext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

PagingType1-v590ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        pagingRecord2List               PagingRecord2List-r5                OPTIONAL
}

-- **************************************************
--
-- PAGING TYPE 2
--
-- **************************************************

PagingType2 ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        pagingCause                     PagingCause,
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity,
        pagingRecordTypeID              PagingRecordTypeID,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            pagingType2-r3-add-ext          BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- PHYSICAL CHANNEL RECONFIGURATION
--
-- **************************************************

PhysicalChannelReconfiguration ::= CHOICE {
```

```
r3                              SEQUENCE {
    physicalChannelReconfiguration-r3
                                    PhysicalChannelReconfiguration-r3-IEs,
    v3a0NonCriticalExtensions           SEQUENCE {
        physicalChannelReconfiguration-v3a0ext      PhysicalChannelReconfiguration-v3a0ext,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            physicalChannelReconfiguration-r3-add-ext           BIT STRING      OPTIONAL,
            v4b0NonCriticalExtenstions          SEQUENCE {
                physicalChannelReconfiguration-v4b0ext
                                        PhysicalChannelReconfiguration-v4b0ext-IEs,
                v590NonCriticalExtenstions          SEQUENCE {
                    physicalChannelReconfiguration-v590ext
                                        PhysicalChannelReconfiguration-v590ext-IEs,
                    v690NonCriticalExtensions       SEQUENCE {
                        physicalChannelReconfiguration-v690ext
                                        PhysicalChannelReconfiguration-v690ext-IEs,
                        nonCriticalExtensions                   SEQUENCE {} OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    }   OPTIONAL
},
later-than-r3                   SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
        r4                              SEQUENCE {
            physicalChannelReconfiguration-r4
                                        PhysicalChannelReconfiguration-r4-IEs,
            v4d0NonCriticalExtensions           SEQUENCE {
                -- Container for adding non critical extensions after freezing REL-5
                physicalChannelReconfiguration-r4-add-ext       BIT STRING      OPTIONAL,
                v590NonCriticalExtenstions          SEQUENCE {
                    physicalChannelReconfiguration-v590ext
                                        PhysicalChannelReconfiguration-v590ext-IEs,
                    v690NonCriticalExtensions       SEQUENCE {
                        physicalChannelReconfiguration-v690ext
                                        PhysicalChannelReconfiguration-v690ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        },
        criticalExtensions              CHOICE {
            r5                              SEQUENCE {
                physicalChannelReconfiguration-r5
                                        PhysicalChannelReconfiguration-r5-IEs,
                -- Container for adding non critical extensions after freezing REL-6
                physicalChannelReconfiguration-r5-add-ext       BIT STRING      OPTIONAL,
                v690NonCriticalExtensions       SEQUENCE {
                    physicalChannelReconfiguration-v690ext
                                        PhysicalChannelReconfiguration-v690ext-IEs,
                    nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r6                              SEQUENCE {
                    physicalChannelReconfiguration-r6
                                        PhysicalChannelReconfiguration-r6-IEs,
                    -- Container for adding non critical extensions after freezing REL-7
                    physicalChannelReconfiguration-r6-add-ext       BIT STRING      OPTIONAL,
                    v6b0NonCriticalExtensions       SEQUENCE {
                        physicalChannelReconfiguration-v6b0ext
                                        PhysicalChannelReconfiguration-v6b0ext-IEs,
                        v7xyNonCriticalExtensions       SEQUENCE {
                            physicalChannelReconfiguration-v7xyext
                                        PhysicalChannelReconfiguration-v7xyext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r7                              SEQUENCE {
                        physicalChannelReconfiguration-r7
                                        PhysicalChannelReconfiguration-r7-IEs,
                        -- Container for adding non critical extensions after freezing REL-8
                        physicalChannelReconfiguration-r7-add-ext   BIT STRING  OPTIONAL,
```

```
                            nonCriticalExtensions                       SEQUENCE {}     OPTIONAL
                        },
                        criticalExtensions              SEQUENCE {}
                    }
                }
            }
        }
    }
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        -- Note: the reference to CPCH in the element name below is incorrect. The name is not
        -- changed to keep it aligned with R99.
        ul-ChannelRequirement           UL-ChannelRequirementWithCPCH-SetID     OPTIONAL,
        modeSpecificInfo                CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation                OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List            OPTIONAL
}

PhysicalChannelReconfiguration-v3a0ext ::= SEQUENCE {
    -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received the UE behaviour
    -- is unspecified
    new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL
}

PhysicalChannelReconfiguration-v4b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           SSDT-UL                             OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE DL-InformationPerRL-List included in this message
        cell-id-PerRL-List              CellIdentity-PerRL-List             OPTIONAL
}

PhysicalChannelReconfiguration-v590ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List        OPTIONAL
}

PhysicalChannelReconfiguration-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
```

```
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        -- Note: the reference to CPCH in the element name below is incorrect. The name is not
        -- changed to keep it aligned with R99.
        ul-ChannelRequirement           UL-ChannelRequirementWithCPCH-SetID-r4  OPTIONAL,
        modeSpecificInfo                CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation-r4             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r4         OPTIONAL
}

PhysicalChannelReconfiguration-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        -- Note: the reference to CPCH in the element name below is incorrect. The name is not
        -- changed to keep it aligned with R99.
        ul-ChannelRequirement           UL-ChannelRequirementWithCPCH-SetID-r5  OPTIONAL,
        modeSpecificInfo                CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-HSPDSCH-Information          DL-HSPDSCH-Information              OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r5             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r5         OPTIONAL
}

PhysicalChannelReconfiguration-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
```

```
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r6                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r6              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r6           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r6             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r6         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

PhysicalChannelReconfiguration-v690ext-IEs ::= SEQUENCE {
    -- User Equipment IEs
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
    -- Core network IEs
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- Physical channel IEs
        -- The IE harq-Preamble-Mode should not be used in the r3 and r4 versions of the message
        -- If included in the r3 or r4 version of the message, the UE should ignore the IE
        harq-Preamble-Mode              HARQ-Preamble-Mode                  OPTIONAL,
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL,
        postVerificationPeriod          ENUMERATED { true }                 OPTIONAL,
        dhs-sync                        DHS-Sync                            OPTIONAL,
        timingMaintainedSynchInd        TimingMaintainedSynchInd            OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

PhysicalChannelReconfiguration-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-InformationPerRL-List-v6b0ext    DL-InformationPerRL-List-v6b0ext    OPTIONAL
}

PhysicalChannelReconfiguration-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r7                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r7              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r7           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r7             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r7         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

PhysicalChannelReconfiguration-v7xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL
}
```

```
-- **************************************************
--
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
--
-- **************************************************

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        ul-IntegProtActivationInfo      IntegrityProtActivationInfo         OPTIONAL,
        -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
        ul-TimingAdvance                UL-TimingAdvance                    OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                      OPTIONAL,
        -- dummy is not used in this version of the specification and
        -- it should be ignored by the receiver.
        dummy                           RB-ActivationTimeInfoList           OPTIONAL,
        ul-CounterSynchronisationInfo   UL-CounterSynchronisationInfo       OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            physicalChannelReconfigurationComplete-r3-add-ext       BIT STRING      OPTIONAL,
            v7xyNonCriticalExtensions       SEQUENCE {
                physicalChannelReconfigurationComplete-v7xyext
                                    PhysicalChannelReconfigurationComplete-v7xyext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

PhysicalChannelReconfigurationComplete-v7xyext-IEs ::=  SEQUENCE {
        ext-ul-TimingAdvance            EXT-UL-TimingAdvance                OPTIONAL
}

-- **************************************************
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- **************************************************

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier           OPTIONAL,
        failureCause                    FailureCauseWithProtErr,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            physicalChannelReconfigurationFailure-r3-add-ext        BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
--
-- **************************************************

PhysicalSharedChannelAllocation ::= CHOICE {
    r3                              SEQUENCE {
        physicalSharedChannelAllocation-r3
                                        PhysicalSharedChannelAllocation-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            physicalSharedChannelAllocation-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {} OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        dsch-RNTI                       DSCH-RNTI                           OPTIONAL,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                physicalSharedChannelAllocation-r4
                                                PhysicalSharedChannelAllocation-r4-IEs,
                v4d0NonCriticalExtensions       SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    physicalSharedChannelAllocation-r4-add-ext      BIT STRING      OPTIONAL,
```

```
                    v690NonCriticalExtensions       SEQUENCE {
                        physicalSharedChannelAllocation-v690ext
                                                        PhysicalSharedChannelAllocation-v690ext-IEs,
                        v7xyNonCriticalExtensions       SEQUENCE {
                            physicalSharedChannelAllocation-v7xyext
                                                        PhysicalSharedChannelAllocation-v7xyext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            },
            criticalExtensions              SEQUENCE {}
        }
    }
}

PhysicalSharedChannelAllocation-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
        dsch-RNTI                       DSCH-RNTI                           OPTIONAL,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Physical channel IEs
        ul-TimingAdvance                UL-TimingAdvanceControl             OPTIONAL,
        pusch-CapacityAllocationInfo    PUSCH-CapacityAllocationInfo        OPTIONAL,
        pdsch-CapacityAllocationInfo    PDSCH-CapacityAllocationInfo        OPTIONAL,
        -- TABULAR: If confirmRequest is not present, the default value "No Confirm"
        -- shall be used as specified in 10.2.25.
        confirmRequest                  ENUMERATED {
                                            confirmPDSCH, confirmPUSCH }    OPTIONAL,
        trafficVolumeReportRequest      INTEGER (0..255)                    OPTIONAL,
        iscpTimeslotList                    TimeslotList                        OPTIONAL,
        requestPCCPCHRSCP                   BOOLEAN
}

PhysicalSharedChannelAllocation-r4-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- Physical channel IEs
        ul-TimingAdvance                UL-TimingAdvanceControl-r4          OPTIONAL,
        pusch-CapacityAllocationInfo    PUSCH-CapacityAllocationInfo-r4     OPTIONAL,
        pdsch-CapacityAllocationInfo    PDSCH-CapacityAllocationInfo-r4     OPTIONAL,
        -- TABULAR: If confirmRequest is not present, the default value "No Confirm"
        -- shall be used as specified in 10.2.25.
        confirmRequest                  ENUMERATED {
                                            confirmPDSCH, confirmPUSCH }    OPTIONAL,
        trafficVolumeReportRequest      INTEGER (0..255)                    OPTIONAL,
        iscpTimeslotList                TimeslotList-r4                     OPTIONAL,
        requestPCCPCHRSCP               BOOLEAN
}

PhysicalSharedChannelAllocation-v690ext-IEs ::= SEQUENCE {
    -- Physical Channel IEs
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL
}

PhysicalSharedChannelAllocation-v7xyext-IEs ::= SEQUENCE {
        ul-TimingAdvance                UL-TimingAdvanceControl-r7          OPTIONAL,
        pusch-CapacityAllocationInfo    PUSCH-CapacityAllocationInfo-r7     OPTIONAL,
        pdsch-CapacityAllocationInfo    PDSCH-CapacityAllocationInfo-r7     OPTIONAL
}

-- **************************************************
--
-- PUSCH CAPACITY REQUEST (TDD only)
--
-- **************************************************

PUSCHCapacityRequest ::= SEQUENCE {
    -- User equipment IEs
        dsch-RNTI                       DSCH-RNTI                           OPTIONAL,
    -- Measurement IEs
        trafficVolume                   TrafficVolumeMeasuredResultsList    OPTIONAL,
        timeslotListWithISCP            TimeslotListWithISCP                OPTIONAL,
        primaryCCPCH-RSCP               PrimaryCCPCH-RSCP                   OPTIONAL,
        allocationConfirmation          CHOICE {
            pdschConfirmation               PDSCH-Identity,
            puschConfirmation               PUSCH-Identity
        }                                                                   OPTIONAL,
        protocolErrorIndicator          ProtocolErrorIndicatorWithMoreInfo,
```

```
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            puschCapacityRequest-r3-add-ext     BIT STRING      OPTIONAL,
            v590NonCriticalExtensions       SEQUENCE {
                puschCapacityRequest-v590ext    PUSCHCapacityRequest-v590ext,
                nonCriticalExtensions           SEQUENCE {} OPTIONAL
            }       OPTIONAL
        }   OPTIONAL
}

PUSCHCapacityRequest-v590ext ::= SEQUENCE {
    primaryCCPCH-RSCP-delta             DeltaRSCP           OPTIONAL
}
-- **************************************************
--
-- RADIO BEARER RECONFIGURATION
--
-- **************************************************

RadioBearerReconfiguration ::= CHOICE {
    r3                          SEQUENCE {
        radioBearerReconfiguration-r3   RadioBearerReconfiguration-r3-IEs,
        -- Prefix "v3ao" is used (in one instance) to keep alignment with R99
        v3aoNonCriticalExtensions       SEQUENCE {
            radioBearerReconfiguration-v3a0ext  RadioBearerReconfiguration-v3a0ext,
            laterNonCriticalExtensions      SEQUENCE {
                -- Container for additional R99 extensions
                radioBearerReconfiguration-r3-add-ext       BIT STRING      OPTIONAL,
                v4b0NonCriticalExtensions           SEQUENCE {
                    radioBearerReconfiguration-v4b0ext
                                                    RadioBearerReconfiguration-v4b0ext-IEs,
                    v590NonCriticalExtensions           SEQUENCE {
                        radioBearerReconfiguration-v590ext
                                                        RadioBearerReconfiguration-v590ext-IEs,
                        v5d0NonCriticalExtenstions          SEQUENCE {
                            radioBearerReconfiguration-v5d0ext
                                                            RadioBearerReconfiguration-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                radioBearerReconfiguration-v690ext
                                                            RadioBearerReconfiguration-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {} OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                radioBearerReconfiguration-r4   RadioBearerReconfiguration-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    radioBearerReconfiguration-r4-add-ext       BIT STRING      OPTIONAL,
                    v590NonCriticalExtensions           SEQUENCE {
                        radioBearerReconfiguration-v590ext
                                                        RadioBearerReconfiguration-v590ext-IEs,
                        v5d0NonCriticalExtenstions          SEQUENCE {
                            radioBearerReconfiguration-v5d0ext
                                                            RadioBearerReconfiguration-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                radioBearerReconfiguration-v690ext
                                                            RadioBearerReconfiguration-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r5                              SEQUENCE {
                    radioBearerReconfiguration-r5       RadioBearerReconfiguration-r5-IEs,
                    -- Container for adding non critical extensions after freezing REL-6
                    radioBearerReconfiguration-r5-add-ext       BIT STRING      OPTIONAL,
                    v5d0NonCriticalExtenstions          SEQUENCE {
                        radioBearerReconfiguration-v5d0ext  RadioBearerReconfiguration-v5d0ext-IEs,
```

```
                        v690NonCriticalExtensions           SEQUENCE {
                            radioBearerReconfiguration-v690ext
                                                            RadioBearerReconfiguration-v690ext-IEs,
                            nonCriticalExtensions               SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r6                                  SEQUENCE {
                        radioBearerReconfiguration-r6       RadioBearerReconfiguration-r6-IEs,
                        -- Container for adding non critical extensions after freezing REL-7
                        radioBearerReconfiguration-r6-add-ext       BIT STRING      OPTIONAL,
                        v6b0NonCriticalExtensions           SEQUENCE {
                            radioBearerReconfiguration-v6b0ext
                                                            RadioBearerReconfiguration-v6b0ext-IEs,
                            v7xyNonCriticalExtensions           SEQUENCE {
                                radioBearerReconfiguration-v7xyext
                                                            RadioBearerReconfiguration-v7xyext-IEs,
                                nonCriticalExtensions               SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    },
                    criticalExtensions              CHOICE {
                        r7                                  SEQUENCE {
                            radioBearerReconfiguration-r7       RadioBearerReconfiguration-r7-IEs,
                            -- Container for adding non critical extensions after freezing REL-8
                            radioBearerReconfiguration-r7-add-ext       BIT STRING      OPTIONAL,
                            nonCriticalExtensions               SEQUENCE {}     OPTIONAL
                        },
                        criticalExtensions              SEQUENCE {}
                    }
                }
            }
        }
    }
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
        -- NOTE: IE rb-InformationReconfigList should be optional in later versions
        -- of this message
        rb-InformationReconfigList      RB-InformationReconfigList,
        rb-InformationAffectedList      RB-InformationAffectedList          OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo                OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo                OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList           OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfo2List        OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement               OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
```

```
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation                OPTIONAL,
        -- NOTE: IE dl-InformationPerRL-List is optional in later versions
        -- of this message
        dl-InformationPerRL-List        DL-InformationPerRL-List
}

RadioBearerReconfiguration-v3a0ext ::= SEQUENCE {
    -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received the UE behaviour
    -- is unspecified
    new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL
}

RadioBearerReconfiguration-v4b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           SSDT-UL                                 OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE DL-InformationPerRL-List included in this message
        cell-id-PerRL-List              CellIdentity-PerRL-List             OPTIONAL
}

RadioBearerReconfiguration-v590ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List        OPTIONAL
}

RadioBearerReconfiguration-v5d0ext-IEs ::= SEQUENCE {
    --Radio Bearer IEs
        pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL
}

RadioBearerReconfiguration-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
        rb-InformationReconfigList      RB-InformationReconfigList-r4       OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList          OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList           OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
```

```
        ul-ChannelRequirement           UL-ChannelRequirement-r4            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation-r4             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r4         OPTIONAL
}

RadioBearerReconfiguration-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
            -- Radio bearer IEs
                rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
                rb-InformationReconfigList      RB-InformationReconfigList-r5       OPTIONAL,
                rb-InformationAffectedList      RB-InformationAffectedList-r5       OPTIONAL,
                rb-PDCPContextRelocationList    RB-PDCPContextRelocationList        OPTIONAL,
            -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
                -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the
                -- specification, they should not be sent and if received they should be ignored.
                dummy                           CHOICE {
                    fdd                             SEQUENCE {
                        dummy1                          CPCH-SetID                  OPTIONAL,
                        dummy2                          DRAC-StaticInformationList  OPTIONAL
                    },
                    tdd                             NULL
                }                                                                   OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL
            },
            preconfiguration                SEQUENCE {
            -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
            -- one for the FDD only elements and one for the TDD only elements, so that one
            -- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r5
                    }
                }
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r5            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
```

```
            tdd                             NULL
        },
        dl-HSPDSCH-Information          DL-HSPDSCH-Information              OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r5             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r5         OPTIONAL
}

RadioBearerReconfiguration-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
            -- Radio bearer IEs
                rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
                rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
                rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
                rb-PDCPContextRelocationList    RB-PDCPContextRelocationList        OPTIONAL,
                pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL,
            -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r6      OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL
            },
            preconfiguration                SEQUENCE {
            -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
            -- one for the FDD only elements and one for the TDD only elements, so that one
            -- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r6
                    }
                }
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r6                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r6              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r6           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r6             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r6         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

RadioBearerReconfiguration-v690ext-IEs ::= SEQUENCE {
    -- User Equipment IEs
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
    -- Core network IEs
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- Physical channel IEs
        -- The IE harq-Preamble-Mode should not be used in the r3 and r4 versions of the message
        -- If included in the r3 or r4 version of the message, the UE should ignore the IE
        harq-Preamble-Mode              HARQ-Preamble-Mode                  OPTIONAL,
```

```
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL,
        postVerificationPeriod          ENUMERATED { true }                 OPTIONAL,
        dhs-sync                        DHS-Sync                            OPTIONAL,
        timingMaintainedSynchInd        TimingMaintainedSynchInd            OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

RadioBearerReconfiguration-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-InformationPerRL-List-v6b0ext    DL-InformationPerRL-List-v6b0ext    OPTIONAL
}

RadioBearerReconfiguration-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
            -- Radio bearer IEs
                rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
                rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
                rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
                rb-PDCPContextRelocationList    RB-PDCPContextRelocationList        OPTIONAL,
                pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL,
            -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r7      OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL
            },
            preconfiguration                SEQUENCE {
            -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
            -- one for the FDD only elements and one for the TDD only elements, so that one
            -- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r6
                    }
                }
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r7                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r7              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r7           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r7             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r7         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

RadioBearerReconfiguration-v7xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
```

```
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER RECONFIGURATION COMPLETE
--
-- **************************************************

RadioBearerReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        ul-IntegProtActivationInfo      IntegrityProtActivationInfo         OPTIONAL,
        -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
        ul-TimingAdvance                UL-TimingAdvance                    OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                      OPTIONAL,
        -- dummy is not used in this version of the specification and
        -- it should be ignored by the receiver.
        dummy                           RB-ActivationTimeInfoList           OPTIONAL,
        ul-CounterSynchronisationInfo   UL-CounterSynchronisationInfo       OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            radioBearerReconfigurationComplete-r3-add-ext       BIT STRING      OPTIONAL,
            v7xyNonCriticalExtensions       SEQUENCE {
                radioBearerReconfigurationComplete-v7xyext
                                            RadioBearerReconfigurationComplete-v7xyext-IEs,
                nonCriticalExtensions           SEQUENCE {} OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

RadioBearerReconfigurationComplete-v7xyext-IEs ::= SEQUENCE {
        ext-ul-TimingAdvance            EXT-UL-TimingAdvance                OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER RECONFIGURATION FAILURE
--
-- **************************************************

RadioBearerReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
    -- Radio bearer IEs
        potentiallySuccesfulBearerList  RB-IdentityList                     OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            radioBearerReconfigurationFailure-r3-add-ext        BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {} OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER RELEASE
--
-- **************************************************

RadioBearerRelease ::= CHOICE {
    r3                              SEQUENCE {
        radioBearerRelease-r3           RadioBearerRelease-r3-IEs,
        v3a0NonCriticalExtensions       SEQUENCE {
            radioBearerRelease-v3a0ext      RadioBearerRelease-v3a0ext,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            radioBearerRelease-r3-add-ext       BIT STRING      OPTIONAL,
                v4b0NonCriticalExtensions       SEQUENCE {
                    radioBearerRelease-v4b0ext      RadioBearerRelease-v4b0ext-IEs,
                    v590NonCriticalExtensions       SEQUENCE {
                        radioBearerRelease-v590ext      RadioBearerRelease-v590ext-IEs,
                        v690NonCriticalExtensions       SEQUENCE {
                            radioBearerRelease-v690ext      RadioBearerRelease-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {} OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
```

```
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                radioBearerRelease-r4           RadioBearerRelease-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    radioBearerRelease-r4-add-ext       BIT STRING      OPTIONAL,
                    v590NonCriticalExtensions       SEQUENCE {
                        radioBearerRelease-v590ext      RadioBearerRelease-v590ext-IEs,
                        v690NonCriticalExtensions       SEQUENCE {
                            radioBearerRelease-v690ext      RadioBearerRelease-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r5                              SEQUENCE {
                    radioBearerRelease-r5           RadioBearerRelease-r5-IEs,
                    -- Container for adding non critical extensions after freezing REL-6
                    radioBearerRelease-r5-add-ext   BIT STRING      OPTIONAL,
                    v690NonCriticalExtensions       SEQUENCE {
                        radioBearerRelease-v690ext      RadioBearerRelease-v690ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r6                              SEQUENCE {
                        radioBearerRelease-r6           RadioBearerRelease-r6-IEs,
                        -- Container for adding non critical extensions after freezing REL-7
                        radioBearerRelease-r6-add-ext   BIT STRING      OPTIONAL,
                        v6b0NonCriticalExtensions       SEQUENCE {
                            radioBearerRelease-v6b0ext      RadioBearerRelease-v6b0ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
                                radioBearerRelease-v7xyext      RadioBearerRelease-v7xyext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    },
                    criticalExtensions              CHOICE {
                        r7                              SEQUENCE {
                            radioBearerRelease-r7           RadioBearerRelease-r7-IEs,
                            -- Container for adding non critical extensions after freezing REL-8
                            radioBearerRelease-r7-add-ext   BIT STRING      OPTIONAL,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        },
                        criticalExtensions              SEQUENCE {}
                    }
                }
            }
        }
    }
}

RadioBearerRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
        signallingConnectionRelIndication   CN-DomainIdentity               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
        rb-InformationReleaseList       RB-InformationReleaseList,
        rb-InformationAffectedList      RB-InformationAffectedList          OPTIONAL,
```

```
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo               OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList          OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList        OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                 OPTIONAL,
                dummy2                          DRAC-StaticInformationList OPTIONAL
            },
            tdd                             NULL
        }                                                                  OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo               OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList          OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfo2List       OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                      OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power              OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement              OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information       OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation               OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List           OPTIONAL
}

RadioBearerRelease-v3a0ext ::= SEQUENCE {
    -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received the UE behaviour
    -- is unspecified
    new-DSCH-RNTI                   DSCH-RNTI                          OPTIONAL
}

RadioBearerRelease-v4b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           SSDT-UL                                OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        --  in IE DL-InformationPerRL-List included in this message
        cell-id-PerRL-List              CellIdentity-PerRL-List                OPTIONAL
}

RadioBearerRelease-v590ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List       OPTIONAL
}

RadioBearerRelease-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo        OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                  OPTIONAL,
        activationTime                  ActivationTime                     OPTIONAL,
        new-U-RNTI                      U-RNTI                             OPTIONAL,
        new-C-RNTI                      C-RNTI                             OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                          OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient   OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                 OPTIONAL,
        signallingConnectionRelIndication   CN-DomainIdentity              OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                       OPTIONAL,
    -- Radio bearer IEs
        rab-InformationReconfigList     RAB-InformationReconfigList        OPTIONAL,
        rb-InformationReleaseList       RB-InformationReleaseList,
        rb-InformationAffectedList      RB-InformationAffectedList         OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo      OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4            OPTIONAL,
```

```
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList           OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r4            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation-r4             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r4         OPTIONAL
}

RadioBearerRelease-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
        signallingConnectionRelIndication   CN-DomainIdentity               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
        rb-InformationReleaseList       RB-InformationReleaseList,
        rb-InformationAffectedList      RB-InformationAffectedList-r5       OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r5            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
```

```
            },
            tdd                         NULL
        },
        dl-HSPDSCH-Information          DL-HSPDSCH-Information              OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r5             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r5         OPTIONAL
}

RadioBearerRelease-v690ext-IEs ::= SEQUENCE {
    -- Core network IEs
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- Physical channel IEs
        -- The IE harq-Preamble-Mode should not be used in the r3 and r4 versions of the message
        -- If included in the r3 or r4 version of the message, the UE should ignore the IE
        harq-Preamble-Mode              HARQ-Preamble-Mode                  OPTIONAL,
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL,
        postVerificationPeriod          ENUMERATED { true }                 OPTIONAL,
        dhs-sync                        DHS-Sync                            OPTIONAL,
        timingMaintainedSynchInd        TimingMaintainedSynchInd            OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL,
        mbms-RB-ListReleasedToChangeTransferMode
                                        RB-InformationReleaseList           OPTIONAL
}

RadioBearerRelease-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
        signallingConnectionRelIndication   CN-DomainIdentity               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
        rb-InformationReleaseList       RB-InformationReleaseList,
        rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r6      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r6                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r6              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r6           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r6             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r6         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL,
        mbms-RB-ListReleasedToChangeTransferMode
                                        RB-InformationReleaseList           OPTIONAL
}

RadioBearerRelease-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-InformationPerRL-List-v6b0ext    DL-InformationPerRL-List-v6b0ext    OPTIONAL
}

RadioBearerRelease-r7-IEs ::= SEQUENCE {
```

```
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
        signallingConnectionRelIndication   CN-DomainIdentity               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
        rb-InformationReleaseList       RB-InformationReleaseList,
        rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r7      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r7                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r7              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r7           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r7             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r7         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL,
        mbms-RB-ListReleasedToChangeTransferMode
                                        RB-InformationReleaseList           OPTIONAL
}

RadioBearerRelease-v7xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER RELEASE COMPLETE
--
-- **************************************************

RadioBearerReleaseComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        ul-IntegProtActivationInfo      IntegrityProtActivationInfo         OPTIONAL,
        -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
        ul-TimingAdvance                UL-TimingAdvance                    OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                      OPTIONAL,
        -- dummy is not used in this version of the specification and
        -- it should be ignored by the receiver.
        dummy                           RB-ActivationTimeInfoList           OPTIONAL,
        ul-CounterSynchronisationInfo   UL-CounterSynchronisationInfo       OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            radioBearerReleaseComplete-r3-add-ext       BIT STRING      OPTIONAL,
            v7xyNonCriticalExtensions       SEQUENCE {
                radioBearerReleaseComplete-v7xyext
                                            RadioBearerReleaseComplete-v7xyext-IEs,
                nonCriticalExtensions       SEQUENCE {}     OPTIONAL
            }   OPTIONAL
```

```
        }   OPTIONAL
}

RadioBearerReleaseComplete-v7xyext-IEs ::= SEQUENCE {
        ext-ul-TimingAdvance            EXT-UL-TimingAdvance                OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER RELEASE FAILURE
--
-- **************************************************

RadioBearerReleaseFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
    -- Radio bearer IEs
        potentiallySuccesfulBearerList  RB-IdentityList                     OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            radioBearerReleaseFailure-r3-add-ext        BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER SETUP
--
-- **************************************************

RadioBearerSetup ::= CHOICE {
    r3                              SEQUENCE {
        radioBearerSetup-r3             RadioBearerSetup-r3-IEs,
        v3a0NonCriticalExtensions       SEQUENCE {
            radioBearerSetup-v3a0ext        RadioBearerSetup-v3a0ext,
            laterNonCriticalExtensions      SEQUENCE {
                -- Container for additional R99 extensions
                radioBearerSetup-r3-add-ext     BIT STRING      OPTIONAL,
                v4b0NonCriticalExtensions       SEQUENCE {
                    radioBearerSetup-v4b0ext        RadioBearerSetup-v4b0ext-IEs,
                    v590NonCriticalExtensions       SEQUENCE {
                        radioBearerSetup-v590ext        RadioBearerSetup-v590ext-IEs,
                        v5d0NonCriticalExtenstions      SEQUENCE {
                            radioBearerSetup-v5d0ext        RadioBearerSetup-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                radioBearerSetup-v690ext        RadioBearerSetup-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {} OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                radioBearerSetup-r4             RadioBearerSetup-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    radioBearerSetup-r4-add-ext     BIT STRING      OPTIONAL,
                    v590NonCriticalExtensions       SEQUENCE {
                        radioBearerSetup-v590ext        RadioBearerSetup-v590ext-IEs,
                        v5d0NonCriticalExtenstions      SEQUENCE {
                            radioBearerSetup-v5d0ext        RadioBearerSetup-v5d0ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                radioBearerSetup-v690ext        RadioBearerSetup-v690ext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r5                              SEQUENCE {
```

```
                    radioBearerSetup-r5             RadioBearerSetup-r5-IEs,
                    -- Container for adding non critical extensions after freezing REL-6
                    radioBearerSetup-r5-add-ext     BIT STRING      OPTIONAL,
                    v5d0NonCriticalExtenstions      SEQUENCE {
                        radioBearerSetup-v5d0ext        RadioBearerSetup-v5d0ext-IEs,
                        v690NonCriticalExtensions       SEQUENCE {
                            radioBearerSetup-v690ext        RadioBearerSetup-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r6                              SEQUENCE {
                        radioBearerSetup-r6             RadioBearerSetup-r6-IEs,
                        -- Container for adding non critical extensions after freezing REL-7
                        radioBearerSetup-r6-add-ext     BIT STRING      OPTIONAL,
                        v6b0NonCriticalExtensions       SEQUENCE {
                            radioBearerSetup-v6b0ext        RadioBearerSetup-v6b0ext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    },
                    criticalExtensions              CHOICE {
                        r7                              SEQUENCE {
                            radioBearerSetup-r7             RadioBearerSetup-r7-IEs,
                            -- Container for adding non critical extensions after freezing REL-8
                            radioBearerSetup-r7-add-ext     BIT STRING      OPTIONAL,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        },
                        criticalExtensions              SEQUENCE {}
                    }
                }
            }
        }
    }
}

RadioBearerSetup-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- Radio bearer IEs
        srb-InformationSetupList        SRB-InformationSetupList            OPTIONAL,
        rab-InformationSetupList        RAB-InformationSetupList            OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList          OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo                OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo                OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList           OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList         OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement               OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
```

```
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation                OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List            OPTIONAL
}

RadioBearerSetup-v3a0ext ::= SEQUENCE {
    -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received the UE behaviour
    -- is unspecified
    new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL
}

RadioBearerSetup-v4b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                               SSDT-UL                             OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE DL-InformationPerRL-List included in this message
        cell-id-PerRL-List                  CellIdentity-PerRL-List             OPTIONAL
}

RadioBearerSetup-v590ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List        OPTIONAL
}

RadioBearerSetup-v5d0ext-IEs ::=    SEQUENCE {
    --Radio Bearer IEs
        pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL
}

RadioBearerSetup-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- Radio bearer IEs
        srb-InformationSetupList        SRB-InformationSetupList            OPTIONAL,
        rab-InformationSetupList        RAB-InformationSetupList-r4         OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList          OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList           OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r4            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
```

```
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation-r4             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r4         OPTIONAL
}

RadioBearerSetup-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- Radio bearer IEs
        srb-InformationSetupList        SRB-InformationSetupList-r5         OPTIONAL,
        rab-InformationSetupList        RAB-InformationSetupList-r5         OPTIONAL,
        rb-InformationAffectedList      RB-InformationAffectedList-r5       OPTIONAL,
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-deletedTransChInfoList       UL-DeletedTransChInfoList           OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r5            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-HSPDSCH-Information          DL-HSPDSCH-Information              OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r5             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r5         OPTIONAL
}

RadioBearerSetup-v690ext-IEs ::= SEQUENCE {
    -- Core network IEs
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- Physical channel IEs
        -- The IE harq-Preamble-Mode should not be used in the r3 and r4 versions of the message
        -- If included in the r3 or r4 version of the message, the UE should ignore the IE
        harq-Preamble-Mode              HARQ-Preamble-Mode                  OPTIONAL,
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL,
        postVerificationPeriod          ENUMERATED { true }                 OPTIONAL,
        dhs-sync                        DHS-Sync                            OPTIONAL,
        timingMaintainedSynchInd        TimingMaintainedSynchInd            OPTIONAL,
    -- Radio bearer IEs
        rab-InformationSetupList        RAB-InformationSetupList-r6-ext     OPTIONAL,
```

```
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

RadioBearerSetup-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
        specificationMode               CHOICE {
            complete                        SEQUENCE {
            -- Radio bearer IEs
                srb-InformationSetupList        SRB-InformationSetupList-r6         OPTIONAL,
                rab-InformationSetupList        RAB-InformationSetupList-r6         OPTIONAL,
                rab-InformationReconfigList     RAB-InformationReconfigList         OPTIONAL,
                rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
                rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
                dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
                pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL,
            -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r6      OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL
            },
            preconfiguration                SEQUENCE {
                rab-Info                        RAB-Info-r6,
                defaultConfigMode               DefaultConfigMode,
                defaultConfigIdentity           DefaultConfigIdentity-r6,
                rb-InformationChangedList       RB-InformationChangedList-r6        OPTIONAL,
                powerOffsetInfoShort            PowerOffsetInfoShort
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r6                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r6              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r6           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r6             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r6         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

RadioBearerSetup-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-InformationPerRL-List-v6b0ext    DL-InformationPerRL-List-v6b0ext    OPTIONAL,
    -- MBMS IEs
        -- The order of the RABs in IE rab-InformationSetupListExt is the same as
        -- in IE rab-InformationSetupList that is included in this message
        rab-InformationSetupListExt     RAB-InformationSetupList-v6b0ext    OPTIONAL
}

RadioBearerSetup-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
```

```
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
        specificationMode               CHOICE {
            complete                        SEQUENCE {
            -- Radio bearer IEs
                srb-InformationSetupList        SRB-InformationSetupList-r6         OPTIONAL,
                rab-InformationSetupList        RAB-InformationSetupList-r7         OPTIONAL,
                rb-InformationReconfigList      RB-InformationReconfigList-r6       OPTIONAL,
                rb-InformationAffectedList      RB-InformationAffectedList-r6       OPTIONAL,
                dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
                pdcp-ROHC-TargetMode            PDCP-ROHC-TargetMode                OPTIONAL,
            -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-deletedTransChInfoList       UL-DeletedTransChInfoList-r6        OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r7      OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-DeletedTransChInfoList       DL-DeletedTransChInfoList-r5        OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL
            },
            preconfiguration                SEQUENCE {
                rab-Info                        RAB-Info-r7,
                defaultConfigMode               DefaultConfigMode,
                defaultConfigIdentity           DefaultConfigIdentity-r6,
                rb-InformationChangedList       RB-InformationChangedList-r6        OPTIONAL,
                powerOffsetInfoShort            PowerOffsetInfoShort
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r7                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r7              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r7           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r7             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r7         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER SETUP COMPLETE
--
-- **************************************************

RadioBearerSetupComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        ul-IntegProtActivationInfo      IntegrityProtActivationInfo         OPTIONAL,
        -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
        ul-TimingAdvance                UL-TimingAdvance                    OPTIONAL,
        start-Value             START-Value                                 OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                      OPTIONAL,
        -- dummy is not used in this version of the specification and
        -- it should be ignored by the receiver.
        dummy                           RB-ActivationTimeInfoList           OPTIONAL,
        ul-CounterSynchronisationInfo   UL-CounterSynchronisationInfo       OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            radioBearerSetupComplete-r3-add-ext     BIT STRING      OPTIONAL,
            v7xyNonCriticalExtensions       SEQUENCE {
                radioBearerSetupComplete-v7xyext
                                                RadioBearerSetupComplete-v7xyext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}
```

```
RadioBearerSetupComplete-v7xyext-IEs ::= SEQUENCE {
        ext-ul-TimingAdvance            EXT-UL-TimingAdvance                OPTIONAL
}

-- **************************************************
--
-- RADIO BEARER SETUP FAILURE
--
-- **************************************************

RadioBearerSetupFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
    -- Radio bearer IEs
        potentiallySuccesfulBearerList  RB-IdentityList                     OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            radioBearerSetupFailure-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- RRC CONNECTION REJECT
--
-- **************************************************

RRCConnectionReject ::= CHOICE {
    r3                              SEQUENCE {
        rrcConnectionReject-r3          RRCConnectionReject-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            rrcConnectionReject-r3-add-ext      BIT STRING      OPTIONAL,
            v690NonCriticalExtensions           SEQUENCE {
                rrcConnectionReject-v690ext     RRCConnectionReject-v690ext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        initialUE-Identity              InitialUE-Identity,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

RRCConnectionReject-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
        initialUE-Identity              InitialUE-Identity,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        rejectionCause                  RejectionCause,
        waitTime                        WaitTime,
        redirectionInfo                 RedirectionInfo                     OPTIONAL
}

RRCConnectionReject-v690ext-IEs ::= SEQUENCE {
    redirectionInfo-v690ext             GSM-TargetCellInfoList          OPTIONAL
}

-- **************************************************
--
-- RRC CONNECTION RELEASE
--
-- **************************************************

RRCConnectionRelease ::= CHOICE {
    r3                              SEQUENCE {
        rrcConnectionRelease-r3         RRCConnectionRelease-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            rrcConnectionRelease-r3-add-ext     BIT STRING      OPTIONAL,
            v690NonCriticalExtensions           SEQUENCE {
                rrcConnectionRelease-v690ext    RRCConnectionRelease-v690ext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
```

```
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                rrcConnectionRelease-r4         RRCConnectionRelease-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-6
                    rrcConnectionRelease-r4-add-ext     BIT STRING      OPTIONAL,
                    v690NonCriticalExtensions           SEQUENCE {
                        rrcConnectionRelease-v690ext        RRCConnectionRelease-v690ext-IEs,
                        v7xyNonCriticalExtensions           SEQUENCE {
                            rrcConnectionRelease-v7xyext        RRCConnectionRelease-v7xyext-IEs,
                            nonCriticalExtensions               SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              SEQUENCE {}
        }
    }
}

RRCConnectionRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        -- n-308 is conditional on the UE state
        n-308                           N-308                                   OPTIONAL,
        releaseCause                    ReleaseCause,
        rplmn-information               Rplmn-Information                       OPTIONAL
}

RRCConnectionRelease-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        -- n-308 is conditional on the UE state.
        n-308                           N-308                                   OPTIONAL,
        releaseCause                    ReleaseCause,
        rplmn-information               Rplmn-Information-r4                    OPTIONAL
}

RRCConnectionRelease-v690ext-IEs ::= SEQUENCE {
        redirectionInfo-v690ext         RedirectionInfo-r6                      OPTIONAL
}

RRCConnectionRelease-v7xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ueMobilityStateIndicator        High-MobilityDetected                   OPTIONAL
}


-- **************************************************
--
-- RRC CONNECTION RELEASE for CCCH
--
-- **************************************************

RRCConnectionRelease-CCCH ::= CHOICE {
    r3                              SEQUENCE {
        rrcConnectionRelease-CCCH-r3    RRCConnectionRelease-CCCH-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            rrcConnectionRelease-CCCH-r3-add-ext        BIT STRING      OPTIONAL,
            v690NonCriticalExtensions       SEQUENCE {
                rrcConnectionRelease-v690ext    RRCConnectionRelease-CCCH-v690ext-IEs,
                nonCriticalExtensions           SEQUENCE {} OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        u-RNTI                          U-RNTI,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                rrcConnectionRelease-CCCH-r4    RRCConnectionRelease-CCCH-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    rrcConnectionRelease-CCCH-r4-add-ext        BIT STRING      OPTIONAL,
```

```
                    v690NonCriticalExtensions       SEQUENCE {
                        rrcConnectionRelease-v690ext    RRCConnectionRelease-CCCH-v690ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                }       OPTIONAL
            },
            criticalExtensions              SEQUENCE {
                -- TABULAR: CHOICE IdentityType (U-RNTI, GroupIdentity) is replaced with the
                -- optional element groupIdentity, since the U-RNTI is mandatory in ASN.1.
                -- In case CHOICE IdentityType is equal to GroupIdentity the value of the U-RNTI
                -- shall be ignored by a UE complying with this version of the message.
                groupIdentity       SEQUENCE ( SIZE (1 .. maxURNTI-Group) ) OF
                                        GroupReleaseInformation     OPTIONAL,
                criticalExtensions              CHOICE {
                    r5                              SEQUENCE {
                        rrcConnectionRelease-CCCH-r5    RRCConnectionRelease-CCCH-r5-IEs,
                        -- Container for adding non critical extensions after freezing REL-6
                        rrcConnectionRelease-CCCH-r5-add-ext        BIT STRING      OPTIONAL,
                        v690NonCriticalExtensions       SEQUENCE {
                            rrcConnectionRelease-v690ext    RRCConnectionRelease-CCCH-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {} OPTIONAL
                        }   OPTIONAL
                    },
                    criticalExtensions              SEQUENCE {}
                }
            }
        }
    }
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        u-RNTI                          U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
        rrcConnectionRelease            RRCConnectionRelease-r3-IEs
}

RRCConnectionRelease-CCCH-r4-IEs ::= SEQUENCE {
    -- The rest of the message is identical to the one sent on DCCH.
        rrcConnectionRelease            RRCConnectionRelease-r4-IEs
}

-- The R5 and R4 sequence of IEs are identical in this message
RRCConnectionRelease-CCCH-r5-IEs ::= RRCConnectionRelease-CCCH-r4-IEs

-- The R6 non-critical extension is identical to the one sent on DCCH.
RRCConnectionRelease-CCCH-v690ext-IEs ::= RRCConnectionRelease-v690ext-IEs

-- ************************************************
--
-- RRC CONNECTION RELEASE COMPLETE
--
-- ************************************************

RRCConnectionReleaseComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        errorIndication                 FailureCauseWithProtErr             OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            rrcConnectionReleaseComplete-r3-add-ext     BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- ************************************************
--
-- RRC CONNECTION REQUEST
--
-- ************************************************

RRCConnectionRequest ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
        initialUE-Identity              InitialUE-Identity,
        establishmentCause              EstablishmentCause,
        -- protocolErrorIndicator is MD, but for compactness reasons no default value
        -- has been assigned to it.
```

```
        protocolErrorIndicator          ProtocolErrorIndicator,
    -- Measurement IEs
        measuredResultsOnRACH           MeasuredResultsOnRACH               OPTIONAL,
    --  Non critical Extensions
        v3d0NonCriticalExtensions           SEQUENCE {
            rRCConnectionRequest-v3d0ext    RRCConnectionRequest-v3d0ext-IEs,
        -- Reserved for future non critical extension
            v4b0NonCriticalExtensions           SEQUENCE {
                rrcConnectionRequest-v4b0ext        RRCConnectionRequest-v4b0ext-IEs,
                v590NonCriticalExtensions           SEQUENCE {
                    rrcConnectionRequest-v590ext        RRCConnectionRequest-v590ext-IEs,
                    v690NonCriticalExtensions           SEQUENCE {
                        rrcConnectionRequest-v690ext    RRCConnectionRequest-v690ext-IEs,
                        -- Reserved for future non critical extension
                        v6b0NonCriticalExtensions       SEQUENCE {
                            rrcConnectionRequest-v6b0ext    RRCConnectionRequest-v6b0ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
                                rrcConnectionRequest-v7xyext    RRCConnectionRequest-v7xyext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

RRCConnectionRequest-v3d0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        uESpecificBehaviourInformation1idle     UESpecificBehaviourInformation1idle     OPTIONAL
}

RRCConnectionRequest-v4b0ext-IEs ::=    SEQUENCE {
    -- User equipment IEs
        accessStratumReleaseIndicator           AccessStratumReleaseIndicator
}

RRCConnectionRequest-v590ext-IEs ::=    SEQUENCE {
    -- User equipment IEs
        predefinedConfigStatusInfo          BOOLEAN
}

RRCConnectionRequest-v690ext-IEs ::=    SEQUENCE {
    -- User equipment IEs
        ueCapabilityIndication              ENUMERATED { hsdch, hsdch-edch }    OPTIONAL,
    -- Measurement IEs
        measuredResultsOnRACHinterFreq      MeasuredResultsOnRACHinterFreq          OPTIONAL,
        domainIndicator                     CHOICE {
            cs-domain                           SEQUENCE {
                csCallType                          ENUMERATED {speech, video, other, spare }
            },
            ps-domain                           NULL
        }
}

RRCConnectionRequest-v6b0ext-IEs ::=    SEQUENCE {
    -- MBMS IEs
        mbmsSelectedServices                MBMS-SelectedServicesShort          OPTIONAL
}

RRCConnectionRequest-v7xyext-IEs ::=    SEQUENCE {
    -- User equipment IEs
        ueMobilityStateIndicator            High-MobilityDetected               OPTIONAL
}

-- **************************************************
--
-- RRC CONNECTION SETUP
--
-- **************************************************

RRCConnectionSetup ::= CHOICE {
    r3                              SEQUENCE {
        rrcConnectionSetup-r3           RRCConnectionSetup-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            rrcConnectionSetup-r3-add-ext   BIT STRING      OPTIONAL,
            v4b0NonCriticalExtensions       SEQUENCE {
```

```
                rrcConnectionSetup-v4b0ext      RRCConnectionSetup-v4b0ext-IEs,
                v590NonCriticalExtensions       SEQUENCE {
                    rrcConnectionSetup-v590ext      RRCConnectionSetup-v590ext-IEs,
                    v690NonCriticalExtensions       SEQUENCE {
                        rrcConnectionSetup-v690ext      RRCConnectionSetup-v690ext-IEs,
                        v7xyNonCriticalExtensions       SEQUENCE {
                            rrcConnectionSetup-v7xyext      RRCConnectionSetup-v7xyext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        },
        later-than-r3                   SEQUENCE {
            initialUE-Identity              InitialUE-Identity,
            rrc-TransactionIdentifier       RRC-TransactionIdentifier,
            criticalExtensions              CHOICE {
                r4                              SEQUENCE {
                    rrcConnectionSetup-r4           RRCConnectionSetup-r4-IEs,
                    v4d0NonCriticalExtensions           SEQUENCE {
                        -- Container for adding non critical extensions after freezing REL-5
                        rrcConnectionSetup-r4-add-ext   BIT STRING      OPTIONAL,
                        v590NonCriticalExtensions       SEQUENCE {
                            rrcConnectionSetup-v590ext      RRCConnectionSetup-v590ext-IEs,
                            v690NonCriticalExtensions       SEQUENCE {
                                rrcConnectionSetup-v690ext      RRCConnectionSetup-v690ext-IEs,
                                v7xyNonCriticalExtensions       SEQUENCE {
                                    rrcConnectionSetup-v7xyext      RRCConnectionSetup-v7xyext-IEs,
                                    nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                                }   OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r5                              SEQUENCE {
                        rrcConnectionSetup-r5           RRCConnectionSetup-r5-IEs,
                        -- Container for adding non critical extensions after freezing REL-6
                        rrcConnectionSetup-r5-add-ext   BIT STRING      OPTIONAL,
                        v690NonCriticalExtensions       SEQUENCE {
                            rrcConnectionSetup-v690ext      RRCConnectionSetup-v690ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
                                rrcConnectionSetup-v7xyext      RRCConnectionSetup-v7xyext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    },
                    criticalExtensions              CHOICE {
                        r6                              SEQUENCE {
                            rrcConnectionSetup-r6           RRCConnectionSetup-r6-IEs,
                            -- Container for adding non critical extensions after freezing REL-7
                            rrcConnectionSetup-r6-add-ext   BIT STRING                  OPTIONAL,
                            v6b0NonCriticalExtensions       SEQUENCE {
                                rrcConnectionSetup-v6b0ext      RRCConnectionSetup-v6b0ext-IEs,
                                v7xyNonCriticalExtensions       SEQUENCE {
                                    rrcConnectionSetup-v7xyext      RRCConnectionSetup-v7xyext-IEs,
                                    nonCriticalExtensions           SEQUENCE {}             OPTIONAL
                                }   OPTIONAL
                            }   OPTIONAL
                        },
                        criticalExtensions              CHOICE {
                            r7                              SEQUENCE {
                                rrcConnectionSetup-r7           RRCConnectionSetup-r7-IEs,
                                -- Container for adding non critical extensions after freezing REL-8
                                rrcConnectionSetup-r7-add-ext   BIT STRING                  OPTIONAL,
                                nonCriticalExtensions           SEQUENCE {}                 OPTIONAL
                            },
                            criticalExtensions              SEQUENCE {}
                        }
                    }
                }
            }
        }
    }
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
```

```
    -- User equipment IEs
        initialUE-Identity              InitialUE-Identity,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI,
        new-c-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient,
        -- TABULAR: If capabilityUpdateRequirement is not present, the default value
        -- defined in 10.3.3.2 shall be used.
        capabilityUpdateRequirement     CapabilityUpdateRequirement         OPTIONAL,
    -- Radio bearer IEs
        srb-InformationSetupList        SRB-InformationSetupList2,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo                OPTIONAL,
        -- NOTE: ul-AddReconfTransChInfoList should be optional in later versions of
        -- this message
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList,
        dl-CommonTransChInfo            DL-CommonTransChInfo                OPTIONAL,
        -- NOTE: dl-AddReconfTransChInfoList should be optional in later versions
        -- of this message
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement               OPTIONAL,
        dl-CommonInformation            DL-CommonInformation                OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List            OPTIONAL
}

RRCConnectionSetup-v4b0ext-IEs ::= SEQUENCE {
        capabilityUpdateRequirement-r4-ext  CapabilityUpdateRequirement-r4-ext  OPTIONAL,
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           SSDT-UL                             OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE DL-InformationPerRL-List included in this message
        cell-id-PerRL-List              CellIdentity-PerRL-List             OPTIONAL
}

RRCConnectionSetup-v590ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        systemSpecificCapUpdateReq      SystemSpecificCapUpdateReq-v590ext      OPTIONAL,
    -- Physical channel IEs
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List        OPTIONAL
}

RRCConnectionSetup-r4-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI,
        new-c-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient,
        -- TABULAR: If capabilityUpdateRequirement is not present, the default value
        -- defined in 10.3.3.2 shall be used.
        capabilityUpdateRequirement     CapabilityUpdateRequirement-r4      OPTIONAL,
    -- Radio bearer IEs
        srb-InformationSetupList        SRB-InformationSetupList2,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r4            OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r4             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r4         OPTIONAL
}

RRCConnectionSetup-r5-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI,
        new-c-RNTI                      C-RNTI                              OPTIONAL,
```

```
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient,
        -- TABULAR: If capabilityUpdateRequirement is not present, the default value
        -- defined in 10.3.3.2 shall be used.
        capabilityUpdateRequirement     CapabilityUpdateRequirement-r5      OPTIONAL,
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
                -- Radio bearer IEs
                srb-InformationSetupList        SRB-InformationSetupList2,
                -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4      OPTIONAL
            },
            preconfiguration                SEQUENCE {
                -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
                -- one for the FDD only elements and one for the TDD only elements, so that one
                -- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r5
                    }
                }
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r4            OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r4             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r5bis      OPTIONAL
}

RRCConnectionSetup-v690ext-IEs ::= SEQUENCE {
    -- Physical Channel IEs
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL,
        postVerificationPeriod          ENUMERATED { true }                 OPTIONAL
}

RRCConnectionSetup-r6-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI,
        new-c-RNTI                      C-RNTI                              OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient,
        -- TABULAR: If capabilityUpdateRequirement is not present, the default value
        -- defined in 10.3.3.2 shall be used.
        capabilityUpdateRequirement     CapabilityUpdateRequirement-r5      OPTIONAL,
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
                -- Radio bearer IEs
                srb-InformationSetupList        SRB-InformationSetupList2-r6,
                -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r6      OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL
            },
            preconfiguration                SEQUENCE {
                -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
                -- one for the FDD only elements and one for the TDD only elements, so that one
                -- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r6
                    }
                }
```

```
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r6                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r6              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r6           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r6             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r6         OPTIONAL
}

RRCConnectionSetup-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-InformationPerRL-List-v6b0ext    DL-InformationPerRL-List-v6b0ext    OPTIONAL
}

RRCConnectionSetup-r7-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI,
        new-c-RNTI                      C-RNTI                              OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient,
        -- TABULAR: If capabilityUpdateRequirement is not present, the default value
        -- defined in 10.3.3.2 shall be used.
        capabilityUpdateRequirement     CapabilityUpdateRequirement-r5      OPTIONAL,
    -- Specification mode information
        specificationMode               CHOICE {
            complete                        SEQUENCE {
                -- Radio bearer IEs
                srb-InformationSetupList        SRB-InformationSetupList2-r6,
                -- Transport channel IEs
                ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
                ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r7      OPTIONAL,
                dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
                dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL
            },
            preconfiguration                SEQUENCE {
                -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
                -- one for the FDD only elements and one for the TDD only elements, so that one
                -- FDD/TDD choice in this level is sufficient.
                preConfigMode                   CHOICE {
                    predefinedConfigIdentity        PredefinedConfigIdentity,
                    defaultConfig                   SEQUENCE {
                        defaultConfigMode               DefaultConfigMode,
                        defaultConfigIdentity           DefaultConfigIdentity-r6
                    }
                }
            }
        },
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r7                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r7              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r7           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r7             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r7         OPTIONAL
}

RRCConnectionSetup-v7xyext-IEs ::= SEQUENCE {
        capabilityUpdateRequirement-r7-ext  CapabilityUpdateRequirement-r7-ext      OPTIONAL
}

-- **************************************************
--
-- RRC CONNECTION SETUP COMPLETE
--
-- **************************************************

RRCConnectionSetupComplete ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
```

```
        startList                       STARTList,
        ue-RadioAccessCapability        UE-RadioAccessCapability            OPTIONAL,
    --  Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList   OPTIONAL,
    -- Non critical extensions
        v370NonCriticalExtensions           SEQUENCE {
            rrcConnectionSetupComplete-v370ext  RRCConnectionSetupComplete-v370ext,
            v380NonCriticalExtensions           SEQUENCE {
                rrcConnectionSetupComplete-v380ext  RRCConnectionSetupComplete-v380ext-IEs,
                -- Reserved for future non critical extension
                v3a0NonCriticalExtensions           SEQUENCE {
                    rrcConnectionSetupComplete-v3a0ext  RRCConnectionSetupComplete-v3a0ext-IEs,
                    laterNonCriticalExtensions          SEQUENCE {
                        -- Container for additional R99 extensions
                        rrcConnectionSetupComplete-r3-add-ext       BIT STRING
                              (CONTAINING RRCConnectionSetupComplete-r3-add-ext-IEs)  OPTIONAL,
                        v3g0NonCriticalExtensions           SEQUENCE {
                            rrcConnectionSetupComplete-v3g0ext  RRCConnectionSetupComplete-v3g0ext-IEs,
                            v4b0NonCriticalExtensions           SEQUENCE {
                                rrcConnectionSetupComplete-v4b0ext
                                                                RRCConnectionSetupComplete-v4b0ext-IEs,
                                v590NonCriticalExtensions           SEQUENCE {
                                    rrcConnectionSetupComplete-v590ext
                                                                RRCConnectionSetupComplete-v590ext-IEs,
                                    v5c0NonCriticalExtensions           SEQUENCE {
                                        rrcConnectionSetupComplete-v5c0ext
                                                                RRCConnectionSetupComplete-v5c0ext-IEs,
                                        v690NonCriticalExtensions           SEQUENCE {
                                            rrcConnectionSetupComplete-v690ext
                                                                RRCConnectionSetupComplete-v690ext-IEs,
                                            v7xyNonCriticalExtensions       SEQUENCE {
                                                rrcConectionSetupComplete-v7xyext
                                                                RRCConnectionSetupComplete-v7xyext-IEs,
                                            nonCriticalExtensions       SEQUENCE {}     OPTIONAL
                                        }       OPTIONAL
                                    }       OPTIONAL
                                }       OPTIONAL
                            }       OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
}

RRCConnectionSetupComplete-v370ext ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v370ext    UE-RadioAccessCapability-v370ext    OPTIONAL
}

RRCConnectionSetupComplete-v380ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v380ext    UE-RadioAccessCapability-v380ext        OPTIONAL,
        dl-PhysChCapabilityFDD-v380ext      DL-PhysChCapabilityFDD-v380ext
}

RRCConnectionSetupComplete-v3a0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v3a0ext    UE-RadioAccessCapability-v3a0ext    OPTIONAL
}

RRCConnectionSetupComplete-v3g0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v3g0ext    UE-RadioAccessCapability-v3g0ext    OPTIONAL
}

RRCConnectionSetupComplete-r3-add-ext-IEs ::= SEQUENCE {
        rrcConnectionSetupComplete-v650ext      RRCConnectionSetupComplete-v650ext-IEs  OPTIONAL,
        v680NonCriticalExtensions               SEQUENCE {
            rrcConnectionSetupComplete-v680ext      RRCConnectionSetupComplete-v680ext-IEs,
            nonCriticalExtensions                   SEQUENCE {}     OPTIONAL
        }       OPTIONAL
}

RRCConnectionSetupComplete-v4b0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v4b0ext        UE-RadioAccessCapability-v4b0ext        OPTIONAL
```

```
}

RRCConnectionSetupComplete-v590ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v590ext        UE-RadioAccessCapability-v590ext        OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability-v590ext        InterRAT-UE-RadioAccessCapability-v590ext   OPTIONAL
}

RRCConnectionSetupComplete-v5c0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v5c0ext        UE-RadioAccessCapability-v5c0ext        OPTIONAL
}

RRCConnectionSetupComplete-v650ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v650ext        UE-RadioAccessCapability-v650ext
}

RRCConnectionSetupComplete-v680ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v680ext        UE-RadioAccessCapability-v680ext
}

RRCConnectionSetupComplete-v690ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ueCapabilityContainer               BIT STRING
                                                (CONTAINING UE-CapabilityContainer-IEs) OPTIONAL
}

RRCConnectionSetupComplete-v7xyext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v7xyext    UE-RadioAccessCapability-v7xyext        OPTIONAL
}

-- **************************************************
--
-- RRC FAILURE INFO
--
-- **************************************************

RRC-FailureInfo ::= CHOICE {
    r3                                      SEQUENCE {
        rRC-FailureInfo-r3                      RRC-FailureInfo-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            rrc-FailureInfo-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions                       SEQUENCE {} OPTIONAL
        }   OPTIONAL
    },
    criticalExtensions                      SEQUENCE {}
}

RRC-FailureInfo-r3-IEs ::=      SEQUENCE {
    -- Non-RRC IEs
        failureCauseWithProtErr                     FailureCauseWithProtErr
}

-- **************************************************
--
-- RRC STATUS
--
-- **************************************************

RRCStatus ::= SEQUENCE {
    -- Other IEs
        -- TABULAR: Identification of received message is nested in
        -- ProtocolErrorMoreInformation
        protocolErrorInformation        ProtocolErrorMoreInformation,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            rrcStatus-r3-add-ext        BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- SECURITY MODE COMMAND
```

```
--
-- **************************************************

SecurityModeCommand ::= CHOICE {
    r3                              SEQUENCE {
        securityModeCommand-r3          SecurityModeCommand-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            securityModeCommand-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r7                              SEQUENCE{
                securityModeCommand-r7          SecurityModeCommand-r7-IEs,
                -- Container for adding non critical extensions after freezing REL-8
                securityModeCommand-r7-add-ext  BIT STRING      OPTIONAL,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            },
            criticalExtensions              SEQUENCE {}
        }
    }
}

SecurityModeCommand-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        securityCapability              SecurityCapability,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity,
    -- Other IEs
        ue-SystemSpecificSecurityCap    InterRAT-UE-SecurityCapList         OPTIONAL
}

SecurityModeCommand-r7-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
    -- User equipment IEs
        securityCapability              SecurityCapability,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity,
    -- Other IEs
        ue-SystemSpecificSecurityCap    InterRAT-UE-SecurityCapList         OPTIONAL
}

-- **************************************************
--
-- SECURITY MODE COMPLETE
--
-- **************************************************

SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.

    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        ul-IntegProtActivationInfo      IntegrityProtActivationInfo         OPTIONAL,
    -- Radio bearer IEs
        rb-UL-CiphActivationTimeInfo    RB-ActivationTimeInfoList           OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            securityModeComplete-r3-add-ext     BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- SECURITY MODE FAILURE
--
-- **************************************************
```

```
SecurityModeFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            securityModeFailure-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- SIGNALLING CONNECTION RELEASE
--
-- **************************************************

SignallingConnectionRelease ::= CHOICE {
    r3                              SEQUENCE {
        signallingConnectionRelease-r3  SignallingConnectionRelease-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            signallingConnectionRelease-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity
}

-- **************************************************
--
-- SIGNALLING CONNECTION RELEASE INDICATION
--
-- **************************************************

SignallingConnectionReleaseIndication ::= SEQUENCE {
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            signallingConnectionReleaseIndication-r3-add-ext        BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- SYSTEM INFORMATION for BCH
--
-- **************************************************

SystemInformation-BCH ::= SEQUENCE {
    -- Other information elements
        sfn-Prime                       SFN-Prime,
        payload                         CHOICE {
            noSegment                       NULL,
            firstSegment                    FirstSegment,
            subsequentSegment               SubsequentSegment,
            lastSegmentShort                        LastSegmentShort,
            lastAndFirst                    SEQUENCE {
                lastSegmentShort                LastSegmentShort,
                firstSegment                    FirstSegmentShort
            },
            lastAndComplete                 SEQUENCE {
                lastSegmentShort                LastSegmentShort,
                completeSIB-List                CompleteSIB-List
            },
            lastAndCompleteAndFirst         SEQUENCE {
```

```
                lastSegmentShort                LastSegmentShort,
                completeSIB-List                CompleteSIB-List,
                firstSegment                    FirstSegmentShort
            },
            completeSIB-List                CompleteSIB-List,
            completeAndFirst                SEQUENCE {
                completeSIB-List                CompleteSIB-List,
                firstSegment                    FirstSegmentShort
            },
            completeSIB                     CompleteSIB,
            lastSegment                     LastSegment,
            spare5                          NULL,
            spare4                          NULL,
            spare3                          NULL,
            spare2                          NULL,
            spare1                          NULL
        }
}

-- **************************************************
--
-- SYSTEM INFORMATION for FACH
--
-- **************************************************

SystemInformation-FACH ::= SEQUENCE {
    -- Other information elements
        payload                         CHOICE {
            noSegment                       NULL,
            firstSegment                    FirstSegment,
            subsequentSegment               SubsequentSegment,
            lastSegmentShort                LastSegmentShort,
            lastAndFirst                    SEQUENCE {
                lastSegmentShort                LastSegmentShort,
                firstSegment                    FirstSegmentShort
            },
            lastAndComplete                 SEQUENCE {
                lastSegmentShort                LastSegmentShort,
                completeSIB-List                CompleteSIB-List
            },
            lastAndCompleteAndFirst         SEQUENCE {
                lastSegmentShort                LastSegmentShort,
                completeSIB-List                CompleteSIB-List,
                firstSegment                    FirstSegmentShort
            },
            completeSIB-List                CompleteSIB-List,
            completeAndFirst                SEQUENCE {
                completeSIB-List                CompleteSIB-List,
                firstSegment                    FirstSegmentShort
            },
            completeSIB                     CompleteSIB,
            lastSegment                     LastSegment,
            spare5                          NULL,
            spare4                          NULL,
            spare3                          NULL,
            spare2                          NULL,
            spare1                          NULL
        }
}

-- **************************************************
--
-- First segment
--
-- **************************************************

FirstSegment ::=                    SEQUENCE {
    -- Other information elements
        sib-Type                        SIB-Type,
        seg-Count                       SegCount,
        sib-Data-fixed                  SIB-Data-fixed
}

-- **************************************************
--
-- First segment (short)
--
-- **************************************************
```

```
FirstSegmentShort ::=               SEQUENCE {
    -- Other information elements
        sib-Type                        SIB-Type,
        seg-Count                       SegCount,
        sib-Data-variable               SIB-Data-variable
}

-- ************************************************
--
-- Subsequent segment
--
-- ************************************************

SubsequentSegment ::=               SEQUENCE {
    -- Other information elements
        sib-Type                        SIB-Type,
        segmentIndex                    SegmentIndex,
        sib-Data-fixed                  SIB-Data-fixed
}

-- ************************************************
--
-- Last segment
--
-- ************************************************

LastSegment ::=                     SEQUENCE {
    -- Other information elements
        sib-Type                        SIB-Type,
        segmentIndex                    SegmentIndex,
        -- For sib-Data-fixed, in case the SIB data is less than 222 bits, padding
        -- shall be used. The same padding bits shall be used as defined in clause 12.1
        sib-Data-fixed                  SIB-Data-fixed
}

LastSegmentShort ::=                        SEQUENCE {
    -- Other information elements
        sib-Type                        SIB-Type,
        segmentIndex                    SegmentIndex,
        sib-Data-variable               SIB-Data-variable
}

-- ************************************************
--
-- Complete SIB
--
-- ************************************************

CompleteSIB-List ::=                SEQUENCE (SIZE (1..maxSIBperMsg)) OF
                                        CompleteSIBshort

CompleteSIB ::=                     SEQUENCE {
    -- Other information elements
        sib-Type                        SIB-Type,
        -- For sib-Data-fixed, in case the SIB data is less than 226 bits, padding
        -- shall be used. The same padding bits shall be used as defined in clause 12.1
        sib-Data-fixed                  BIT STRING (SIZE (226))
}

CompleteSIBshort ::=                        SEQUENCE {
    -- Other information elements
        sib-Type                        SIB-Type,
        sib-Data-variable               SIB-Data-variable
}

-- ************************************************
--
-- SYSTEM INFORMATION CHANGE INDICATION
--
-- ************************************************

SystemInformationChangeIndication ::=   SEQUENCE {
    -- Other IEs
        bcch-ModificationInfo               BCCH-ModificationInfo,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            systemInformationChangeIndication-r3-add-ext        BIT STRING      OPTIONAL,
```

```
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- TRANSPORT CHANNEL RECONFIGURATION
--
-- **************************************************

TransportChannelReconfiguration ::= CHOICE {
    r3                              SEQUENCE {
        transportChannelReconfiguration-r3
                                        TransportChannelReconfiguration-r3-IEs,
        v3a0NonCriticalExtensions       SEQUENCE {
            transportChannelReconfiguration-v3a0ext
                                            TransportChannelReconfiguration-v3a0ext,
            laterNonCriticalExtensions          SEQUENCE {
                -- Container for additional R99 extensions
                transportChannelReconfiguration-r3-add-ext      BIT STRING      OPTIONAL,
                v4b0NonCriticalExtensions       SEQUENCE {
                    transportChannelReconfiguration-v4b0ext
                                                    TransportChannelReconfiguration-v4b0ext-IEs,
                    v590NonCriticalExtensions       SEQUENCE {
                        transportChannelReconfiguration-v590ext
                                                        TransportChannelReconfiguration-v590ext-IEs,
                        v690NonCriticalExtensions       SEQUENCE {
                            transportChannelReconfiguration-v690ext
                                                        TransportChannelReconfiguration-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                transportChannelReconfiguration-r4
                                                TransportChannelReconfiguration-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    transportChannelReconfiguration-r4-add-ext      BIT STRING      OPTIONAL,
                    v590NonCriticalExtensions       SEQUENCE {
                        transportChannelReconfiguration-v590ext
                                                        TransportChannelReconfiguration-v590ext-IEs,
                        v690NonCriticalExtensions       SEQUENCE {
                            transportChannelReconfiguration-v690ext
                                                        TransportChannelReconfiguration-v690ext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r5                              SEQUENCE {
                    transportChannelReconfiguration-r5
                                                    TransportChannelReconfiguration-r5-IEs,
                    -- Container for adding non critical extensions after freezing REL-6
                    transportChannelReconfiguration-r5-add-ext      BIT STRING      OPTIONAL,
                    v690NonCriticalExtensions       SEQUENCE {
                        transportChannelReconfiguration-v690ext
                                                        TransportChannelReconfiguration-v690ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r6                              SEQUENCE {
                        transportChannelReconfiguration-r6
                                                        TransportChannelReconfiguration-r6-IEs,
                        -- Container for adding non critical extensions after freezing REL-7
                        transportChannelReconfiguration-r6-add-ext      BIT STRING      OPTIONAL,
                        v6b0NonCriticalExtensions       SEQUENCE {
                            transportChannelReconfiguration-v6b0ext
                                                        TransportChannelReconfiguration-v6b0ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
```

```
                            transportChannelReconfiguration-v7xyext
                                                TransportChannelReconfiguration-v7xyext-IEs,
                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r7                              SEQUENCE {
                        transportChannelReconfiguration-r7
                                                TransportChannelReconfiguration-r7-IEs,
                        -- Container for adding non critical extensions after freezing REL-8
                        transportChannelReconfiguration-r7-add-ext      BIT STRING  OPTIONAL,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    },
                    criticalExtensions              SEQUENCE {}
                }
            }
        }
    }
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo                OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo                OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList         OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement               OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                         NULL
        },
        dl-CommonInformation            DL-CommonInformation                OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List            OPTIONAL
}

TransportChannelReconfiguration-v3a0ext ::= SEQUENCE {
    -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
    -- the UE behaviour is unspecified
    new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL
}

TransportChannelReconfiguration-v4b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
```

```
        dummy                               SSDT-UL                                 OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE DL-InformationPerRL-List included in this message
        cell-id-PerRL-List                  CellIdentity-PerRL-List                 OPTIONAL
}

TransportChannelReconfiguration-v590ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-TPC-PowerOffsetPerRL-List    DL-TPC-PowerOffsetPerRL-List        OPTIONAL
}

TransportChannelReconfiguration-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r4      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r4            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonInformation            DL-CommonInformation-r4             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r4         OPTIONAL
}

TransportChannelReconfiguration-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode, and if received
        -- the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
```

```
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-ChannelRequirement           UL-ChannelRequirement-r5            OPTIONAL,
        modeSpecificPhysChInfo          CHOICE {
            fdd                             SEQUENCE {
                -- dummy is not used in this version of specification, it should
                -- not be sent and if received it should be ignored.
                dummy                           DL-PDSCH-Information        OPTIONAL
            },
            tdd                         NULL
        },
        dl-HSPDSCH-Information          DL-HSPDSCH-Information              OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r5             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r5         OPTIONAL
}

TransportChannelReconfiguration-v690ext-IEs ::= SEQUENCE {
    -- User Equipment IEs
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
    -- Core network IEs
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- Physical channel IEs
        -- The IE harq-Preamble-Mode should not be used in the r3 and r4 versions of the message
        -- If included in the r3 or r4 version of the message, the UE should ignore the IE
        harq-Preamble-Mode              HARQ-Preamble-Mode                  OPTIONAL,
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL,
        postVerificationPeriod          ENUMERATED { true }                 OPTIONAL,
        dhs-sync                        DHS-Sync                            OPTIONAL,
        timingMaintainedSynchInd        TimingMaintainedSynchInd            OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

TransportChannelReconfiguration-r6-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r6      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
```

```
        ul-DPCH-Info                    UL-DPCH-Info-r6                     OPTIONAL,
        ul-EDCH-Information              UL-EDCH-Information-r6              OPTIONAL,
        dl-HSPDSCH-Information           DL-HSPDSCH-Information-r6           OPTIONAL,
        dl-CommonInformation             DL-CommonInformation-r6             OPTIONAL,
        dl-InformationPerRL-List         DL-InformationPerRL-List-r6         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo      MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

TransportChannelReconfiguration-v6b0ext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        dl-InformationPerRL-List-v6b0ext    DL-InformationPerRL-List-v6b0ext    OPTIONAL
}

TransportChannelReconfiguration-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        activationTime                  ActivationTime                      OPTIONAL,
        delayRestrictionFlag            DelayRestrictionFlag                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        -- The IE "new-DSCH-RNTI" should not be included in FDD mode,
        -- and if received the UE behaviour is unspecified
        new-DSCH-RNTI                   DSCH-RNTI                           OPTIONAL,
        new-H-RNTI                      H-RNTI                              OPTIONAL,
        newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
        newSecondary-E-RNTI             E-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
        cn-InformationInfo              CN-InformationInfo-r6               OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList-r7      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- Physical channel IEs
        frequencyInfo                   FrequencyInfo                       OPTIONAL,
        maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
        ul-DPCH-Info                    UL-DPCH-Info-r7                     OPTIONAL,
        ul-EDCH-Information             UL-EDCH-Information-r7              OPTIONAL,
        dl-HSPDSCH-Information          DL-HSPDSCH-Information-r7           OPTIONAL,
        dl-CommonInformation            DL-CommonInformation-r7             OPTIONAL,
        dl-InformationPerRL-List        DL-InformationPerRL-List-r7         OPTIONAL,
    -- MBMS IEs
        mbms-PL-ServiceRestrictInfo     MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

TransportChannelReconfiguration-v7xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ueMobilityStateIndicator        High-MobilityDetected               OPTIONAL
}

-- **************************************************
--
-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
--
-- **************************************************

TransportChannelReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        ul-IntegProtActivationInfo      IntegrityProtActivationInfo         OPTIONAL,
        -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
        ul-TimingAdvance                UL-TimingAdvance                    OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                      OPTIONAL,
        -- dummy is not used in this version of the specification and
        -- it should be ignored by the receiver.
        dummy                           RB-ActivationTimeInfoList           OPTIONAL,
        ul-CounterSynchronisationInfo   UL-CounterSynchronisationInfo       OPTIONAL,
        laterNonCriticalExtensions      SEQUENCE {
```

```
            -- Container for additional R99 extensions
            transportChannelReconfigurationComplete-r3-add-ext      BIT STRING      OPTIONAL,
            v7xyNonCriticalExtensions       SEQUENCE {
                transportChannelReconfigurationComplete-v7xyext
                                    TransportChannelReconfigurationComplete-v7xyext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

TransportChannelReconfigurationComplete-v7xyext-IEs ::= SEQUENCE {
        ext-ul-TimingAdvance            EXT-UL-TimingAdvance                OPTIONAL
}

-- **************************************************
--
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
--
-- **************************************************

TransportChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            transportChannelReconfigurationFailure-r3-add-ext       BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- TRANSPORT FORMAT COMBINATION CONTROL in AM or UM RLC mode
--
-- **************************************************

TransportFormatCombinationControl ::= SEQUENCE {
        -- rrc-TransactionIdentifier is always included in this version of the specification
        rrc-TransactionIdentifier       RRC-TransactionIdentifier           OPTIONAL,
        modeSpecificInfo                    CHOICE {
            fdd                                 NULL,
            tdd                                 SEQUENCE {
                tfcs-ID                             TFCS-Identity   OPTIONAL
            }
        },
        dpch-TFCS-InUplink                  TFC-Subset,
        activationTimeForTFCSubset          ActivationTime                      OPTIONAL,
        tfc-ControlDuration                 TFC-ControlDuration                 OPTIONAL,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            transportFormatCombinationControl-r3-add-ext        BIT STRING      OPTIONAL,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
--
-- **************************************************

TransportFormatCombinationControlFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            transportFormatCombinationControlFailure-r3-add-ext     BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- UE CAPABILITY ENQUIRY
--
-- **************************************************
```

```
UECapabilityEnquiry ::= CHOICE {
    r3                              SEQUENCE {
        ueCapabilityEnquiry-r3          UECapabilityEnquiry-r3-IEs,
        laterNonCriticalExtensions      SEQUENCE {
            -- Container for additional R99 extensions
            ueCapabilityEnquiry-r3-add-ext      BIT STRING      OPTIONAL,
            v4b0NonCriticalExtensions       SEQUENCE {
                ueCapabilityEnquiry-v4b0ext     UECapabilityEnquiry-v4b0ext-IEs,
                v590NonCriticalExtensions       SEQUENCE {
                    ueCapabilityEnquiry-v590ext     UECapabilityEnquiry-v590ext-IEs,
                    v7xyNonCriticalExtensions       SEQUENCE {
                        ueCapabilityEnquiry-v7xyext     UECapabilityEnquiry-v7xyext-IEs,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        capabilityUpdateRequirement     CapabilityUpdateRequirement
}

UECapabilityEnquiry-v4b0ext-IEs ::= SEQUENCE {
        capabilityUpdateRequirement-r4-ext  CapabilityUpdateRequirement-r4-ext
}

UECapabilityEnquiry-v590ext-IEs ::= SEQUENCE {
        systemSpecificCapUpdateReq      SystemSpecificCapUpdateReq-v590ext
}

UECapabilityEnquiry-v7xyext-IEs ::= SEQUENCE {
        capabilityUpdateRequirement-r7-ext      CapabilityUpdateRequirement-r7-ext      OPTIONAL
}

-- **************************************************
--
-- UE CAPABILITY INFORMATION
--
-- **************************************************

UECapabilityInformation ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier           OPTIONAL,
        ue-RadioAccessCapability        UE-RadioAccessCapability            OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList       OPTIONAL,
        v370NonCriticalExtensions           SEQUENCE {
            ueCapabilityInformation-v370ext UECapabilityInformation-v370ext,
            v380NonCriticalExtensions           SEQUENCE {
                ueCapabilityInformation-v380ext     UECapabilityInformation-v380ext-IEs,
                v3a0NonCriticalExtensions           SEQUENCE {
                    ueCapabilityInformation-v3a0ext     UECapabilityInformation-v3a0ext-IEs,
                    laterNonCriticalExtensions          SEQUENCE {
                        -- Container for additional R99 extensions
                        ueCapabilityInformation-r3-add-ext      BIT STRING
                                    (CONTAINING UECapabilityInformation-r3-add-ext-IEs) OPTIONAL,
                        -- Reserved for future non critical extension
                        v4b0NonCriticalExtensions           SEQUENCE {
                            ueCapabilityInformation-v4b0ext     UECapabilityInformation-v4b0ext,
                            v590NonCriticalExtensions           SEQUENCE {
                                ueCapabilityInformation-v590ext     UECapabilityInformation-v590ext,
                                v5c0NonCriticalExtensions           SEQUENCE {
                                    ueCapabilityInformation-v5c0ext
                                                                        UECapabilityInformation-v5c0ext,
                                    v690NonCriticalExtensions           SEQUENCE {
                                        ueCapabilityInformation-v690ext
                                                                    UECapabilityInformation-v690ext-IEs,
                                        v7xyNonCriticalExtensions           SEQUENCE {
                                            ueCapabilityInformation-v7xyext
```

```
                                                        UECapabilityInformation-v7xyext-IEs,
                                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                                    }       OPTIONAL
                                }       OPTIONAL
                            }       OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
}

UECapabilityInformation-v370ext ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v370ext        UE-RadioAccessCapability-v370ext        OPTIONAL
}

UECapabilityInformation-v380ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v380ext        UE-RadioAccessCapability-v380ext        OPTIONAL,
        dl-PhysChCapabilityFDD-v380ext          DL-PhysChCapabilityFDD-v380ext
}

UECapabilityInformation-v3a0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v3a0ext        UE-RadioAccessCapability-v3a0ext        OPTIONAL
}

UECapabilityInformation-r3-add-ext-IEs ::= SEQUENCE {
        ueCapabilityInformation-v650ext     UECapabilityInformation-v650ext-IEs     OPTIONAL,
        v680NonCriticalExtensions           SEQUENCE {
            ueCapabilityInformation-v680ext     UECapabilityInformation-v680ext-IEs,
            nonCriticalExtensions               SEQUENCE {}     OPTIONAL
        }       OPTIONAL
}

UECapabilityInformation-v4b0ext ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v4b0ext        UE-RadioAccessCapability-v4b0ext        OPTIONAL
}

UECapabilityInformation-v590ext ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v3g0ext        UE-RadioAccessCapability-v3g0ext        OPTIONAL,
        ue-RadioAccessCapability-v590ext        UE-RadioAccessCapability-v590ext        OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability-v590ext    InterRAT-UE-RadioAccessCapability-v590ext   OPTIONAL
}

UECapabilityInformation-v5c0ext ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v5c0ext        UE-RadioAccessCapability-v5c0ext        OPTIONAL
}

UECapabilityInformation-v650ext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v650ext        UE-RadioAccessCapability-v650ext
}

UECapabilityInformation-v680ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ue-RadioAccessCapability-v680ext        UE-RadioAccessCapability-v680ext
}

UECapabilityInformation-v690ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        ueCapabilityContainer               BIT STRING
                                                (CONTAINING UE-CapabilityContainer-IEs) OPTIONAL
}

UECapabilityInformation-v7xyext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v7xyext    UE-RadioAccessCapability-v7xyext        OPTIONAL
}

-- ************************************************
--
-- UE CAPABILITY INFORMATION CONFIRM
--
```

```
-- **************************************************

UECapabilityInformationConfirm ::= CHOICE {
    r3                              SEQUENCE {
        ueCapabilityInformationConfirm-r3
                                        UECapabilityInformationConfirm-r3-IEs,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            ueCapabilityInformationConfirm-r3-add-ext       BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

UECapabilityInformationConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier
}

-- **************************************************
--
-- UPLINK DIRECT TRANSFER
--
-- **************************************************

UplinkDirectTransfer ::= SEQUENCE {
    -- Core network IEs
        cn-DomainIdentity               CN-DomainIdentity,
        nas-Message                     NAS-Message,
    -- Measurement IEs
        measuredResultsOnRACH           MeasuredResultsOnRACH               OPTIONAL,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            uplinkDirectTransfer-r3-add-ext     BIT STRING      OPTIONAL,
            v690NonCriticalExtensions           SEQUENCE {
                uplinkDirectTransfer-v690ext        UplinkDirectTransfer-v690ext-IEs,
                nonCriticalExtensions               SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

UplinkDirectTransfer-v690ext-IEs ::= SEQUENCE {
    -- Measurement IEs
    measuredResultsOnRACHinterFreq      MeasuredResultsOnRACHinterFreq              OPTIONAL
}

-- **************************************************
--
-- UPLINK PHYSICAL CHANNEL CONTROL
--
-- **************************************************

UplinkPhysicalChannelControl ::= CHOICE {
    r3                              SEQUENCE {
        uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            uplinkPhysicalChannelControl-r3-add-ext     BIT STRING      OPTIONAL,
            v4b0NonCriticalExtensions       SEQUENCE {
                uplinkPysicalChannelControl-v4b0ext     UplinkPhysicalChannelControl-v4b0ext-IEs,
                -- Extension mechanism for non-release 4 information
                noncriticalExtensions           SEQUENCE {}                     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r4                              SEQUENCE {
                uplinkPhysicalChannelControl-r4 UplinkPhysicalChannelControl-r4-IEs,
                v4d0NonCriticalExtensions           SEQUENCE {
                    -- Container for adding non critical extensions after freezing REL-5
                    uplinkPhysicalChannelControl-r4-add-ext     BIT STRING      OPTIONAL,
                    v690NonCriticalExtensions       SEQUENCE {
```

```
                        uplinkPhysicalChannelControl-v690ext    UplinkPhysicalChannelControl-v690ext-IEs,
                        nonCriticalExtensions           SEQUENCE {} OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions          CHOICE {
                r5                          SEQUENCE {
                    uplinkPhysicalChannelControl-r5 UplinkPhysicalChannelControl-r5-IEs,
                    -- Container for adding non critical extensions after freezing REL-6
                    uplinkPhysicalChannelControl-r5-add-ext     BIT STRING      OPTIONAL,
                    v690NonCriticalExtensions       SEQUENCE {
                        uplinkPhysicalChannelControl-v690ext    UplinkPhysicalChannelControl-v690ext-IEs,
                        v6a0NonCriticalExtensions       SEQUENCE{
                            uplinkPhysicalChannelControl-v6a0ext
                                                            UplinkPhysicalChannelControl-v6a0ext-IEs,
                            nonCriticalExtensions           SEQUENCE {} OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r7                              SEQUENCE {
                        uplinkPhysicalChannelControl-r7 UplinkPhysicalChannelControl-r7-IEs,
                        -- Container for adding non critical extensions after freezing REL-8
                        uplinkPhysicalChannelControl-r7-add-ext     BIT STRING      OPTIONAL,
                        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                    },
                    criticalExtensions              SEQUENCE {}
                }
            }
        }
    }
}

UplinkPhysicalChannelControl-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    -- Physical channel IEs
        ccTrCH-PowerControlInfo         CCTrCH-PowerControlInfo             OPTIONAL,
        timingAdvance                   UL-TimingAdvanceControl             OPTIONAL,
        alpha                           Alpha                               OPTIONAL,
        specialBurstScheduling          SpecialBurstScheduling              OPTIONAL,
        prach-ConstantValue             ConstantValueTdd                    OPTIONAL,
        pusch-ConstantValue             ConstantValueTdd                    OPTIONAL
}

UplinkPhysicalChannelControl-v4b0ext-IEs ::= SEQUENCE {
    -- In case of TDD, openLoopPowerControl-IPDL-TDD is included instead of IE
    -- up-IPDL-Parameters in up-OTDOA-AssistanceData
    openLoopPowerControl-IPDL-TDD   OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL
}

UplinkPhysicalChannelControl-r4-IEs ::= SEQUENCE {
    -- Physical channel IEs
        ccTrCH-PowerControlInfo         CCTrCH-PowerControlInfo-r4          OPTIONAL,
        specialBurstScheduling          SpecialBurstScheduling              OPTIONAL,
        tddOption                       CHOICE {
            tdd384                          SEQUENCE {
                timingAdvance                   UL-TimingAdvanceControl-r4  OPTIONAL,
                alpha                           Alpha                       OPTIONAL,
                prach-ConstantValue             ConstantValueTdd            OPTIONAL,
                pusch-ConstantValue             ConstantValueTdd            OPTIONAL,
                openLoopPowerControl-IPDL-TDD   OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL
            },
            tdd128                          SEQUENCE {
                ul-SynchronisationParameters    UL-SynchronisationParameters-r4 OPTIONAL
            }
        }
}

UplinkPhysicalChannelControl-r5-IEs ::= SEQUENCE {
    -- Physical channel IEs
        ccTrCH-PowerControlInfo         CCTrCH-PowerControlInfo-r5          OPTIONAL,
        specialBurstScheduling          SpecialBurstScheduling              OPTIONAL,
        tddOption                       CHOICE {
            tdd384                          SEQUENCE {
                timingAdvance                   UL-TimingAdvanceControl-r4  OPTIONAL,
                alpha                           Alpha                       OPTIONAL,
                prach-ConstantValue             ConstantValueTdd            OPTIONAL,
```

```
                pusch-ConstantValue             ConstantValueTdd            OPTIONAL,
                openLoopPowerControl-IPDL-TDD   OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL,
                hs-SICH-PowerControl            HS-SICH-Power-Control-Info-TDD384   OPTIONAL
            },
            tdd128                          SEQUENCE {
                ul-SynchronisationParameters    UL-SynchronisationParameters-r4 OPTIONAL
            }
        }
}

UplinkPhysicalChannelControl-v690ext-IEs ::= SEQUENCE {
    -- Physical Channel IEs
        beaconPLEst                     BEACON-PL-Est                       OPTIONAL
}

UplinkPhysicalChannelControl-v6a0ext-IEs ::= SEQUENCE {
    -- Physical Channel IEs
        desired-HS-SICH-PowerLevel      INTEGER (-120..-58)                 OPTIONAL,
        tpc-Step-Size                   ENUMERATED { s1, s2, s3 , spare1 }  OPTIONAL
}

UplinkPhysicalChannelControl-r7-IEs ::= SEQUENCE {
    -- Physical channel IEs
        ccTrCH-PowerControlInfo         CCTrCH-PowerControlInfo-r7          OPTIONAL,
        specialBurstScheduling          SpecialBurstScheduling              OPTIONAL,
        tddOption                       CHOICE {
            tdd384                          SEQUENCE {
                timingAdvance                   UL-TimingAdvanceControl-r4  OPTIONAL,
                alpha                           Alpha                       OPTIONAL,
                prach-ConstantValue             ConstantValueTdd            OPTIONAL,
                pusch-ConstantValue             ConstantValueTdd            OPTIONAL,
                openLoopPowerControl-IPDL-TDD   OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL,
                hs-SICH-PowerControl            HS-SICH-Power-Control-Info-TDD384   OPTIONAL
            },
            tdd768                          SEQUENCE {
                timingAdvance                   UL-TimingAdvanceControl-r7  OPTIONAL,
                alpha                           Alpha                       OPTIONAL,
                prach-ConstantValue             ConstantValueTdd            OPTIONAL,
                pusch-ConstantValue             ConstantValueTdd            OPTIONAL,
                openLoopPowerControl-IPDL-TDD   OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL,
                hs-SICH-PowerControl            HS-SICH-Power-Control-Info-TDD768   OPTIONAL
            },
            tdd128                          SEQUENCE {
                ul-SynchronisationParameters    UL-SynchronisationParameters-r4 OPTIONAL,
                desired-HS-SICH-PowerLevel      INTEGER (-120..-58)             OPTIONAL,
                tpc-Step-Size                   ENUMERATED { s1, s2, s3 , spare1 }  OPTIONAL
            }
        }
}

-- **************************************************
--
-- URA UPDATE
--
-- **************************************************

URAUpdate ::= SEQUENCE {
    -- User equipment IEs
        u-RNTI                          U-RNTI,
        ura-UpdateCause                 URA-UpdateCause,
        protocolErrorIndicator          ProtocolErrorIndicatorWithMoreInfo,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            uraUpdate-r3-add-ext        BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- URA UPDATE CONFIRM
--
-- **************************************************

URAUpdateConfirm ::= CHOICE {
    r3                              SEQUENCE {
        uraUpdateConfirm-r3             URAUpdateConfirm-r3-IEs,
        laterNonCriticalExtensions          SEQUENCE {
```

```
            -- Container for additional R99 extensions
            uraUpdateConfirm-r3-add-ext     BIT STRING      OPTIONAL,
            v690NonCriticalExtensions       SEQUENCE {
                uraUpdateConfirm-v690ext            URAUpdateConfirm-v690ext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r5                              SEQUENCE {
                uraUpdateConfirm-r5             URAUpdateConfirm-r5-IEs,
                v690NonCriticalExtensions       SEQUENCE {
                    uraUpdateConfirm-v690ext            URAUpdateConfirm-v690ext-IEs,
                    nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r7                              SEQUENCE {
                uraUpdateConfirm-r7                 URAUpdateConfirm-r7-IEs,
                -- Container for adding non critical extensions after freezing REL-8
                uraUpdateConfirm-r7-add-ext         BIT STRING      OPTIONAL,
                nonCriticalExtensions               SEQUENCE {}     OPTIONAL
                },
                criticalExtensions              SEQUENCE {}
            }
        }
    }
}

URAUpdateConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL
}

URAUpdateConfirm-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL
}

URAUpdateConfirm-v690ext-IEs ::= SEQUENCE {
    -- Core network IEs
        primary-plmn-Identity               PLMN-Identity                   OPTIONAL
}

URAUpdateConfirm-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        rrc-StateIndicator              RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- CN information elements
```

```
        cn-InformationInfo              CN-InformationInfo                  OPTIONAL,
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL
}

-- **************************************************
--
-- URA UPDATE CONFIRM for CCCH
--
-- **************************************************

URAUpdateConfirm-CCCH ::= CHOICE {
    r3                              SEQUENCE {
        uraUpdateConfirm-CCCH-r3        URAUpdateConfirm-CCCH-r3-IEs,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            uraUpdateConfirm-CCCH-r3-add-ext        BIT STRING      OPTIONAL,
            v690NonCriticalExtensions       SEQUENCE {
                uraUpdateConfirm-v690ext            URAUpdateConfirm-v690ext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        u-RNTI                          U-RNTI,
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              SEQUENCE {}
    }
}

URAUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        u-RNTI                          U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
        uraUpdateConfirm                URAUpdateConfirm-r3-IEs
}

-- **************************************************
--
-- UTRAN MOBILITY INFORMATION
--
-- **************************************************

UTRANMobilityInformation ::= CHOICE {
    r3                              SEQUENCE {
        utranMobilityInformation-r3     UTRANMobilityInformation-r3-IEs,
        v3a0NonCriticalExtensions       SEQUENCE {
            utranMobilityInformation-v3a0ext    UTRANMobilityInformation-v3a0ext-IEs,
            laterNonCriticalExtensions          SEQUENCE {
                -- Container for additional R99 extensions
                utranMobilityInformation-r3-add-ext     BIT STRING      OPTIONAL,
                v690NonCriticalExtensions           SEQUENCE {
                    utranMobilityInformation-v690ext    UtranMobilityInformation-v690ext-IEs,
                    nonCriticalExtensions               SEQUENCE {}     OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        criticalExtensions              CHOICE {
            r5                              SEQUENCE {
                utranMobilityInformation-r5     UTRANMobilityInformation-r5-IEs,
                v690NonCriticalExtensions       SEQUENCE {
                    utranMobilityInformation-v690ext    UtranMobilityInformation-v690ext-IEs,
                    nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions                  CHOICE {
                r7                                  SEQUENCE{
                    utranMobilityInformation-r7         UTRANMobilityInformation-r7-IEs,
                    -- Container for adding non critical extensions after freezing REL-8
                    utranMobilityInformation-r7-add-ext BIT STRING      OPTIONAL,
                    nonCriticalExtensions               SEQUENCE {}     OPTIONAL
                },
```

```
                criticalExtensions              SEQUENCE {}
            }
        }
    }
}

UTRANMobilityInformation-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        ue-ConnTimersAndConstants       UE-ConnTimersAndConstants           OPTIONAL,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfoFull              OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo       OPTIONAL,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

UTRANMobilityInformation-v3a0ext-IEs ::= SEQUENCE {
    ue-ConnTimersAndConstants-v3a0ext       UE-ConnTimersAndConstants-v3a0ext
}

UTRANMobilityInformation-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo         OPTIONAL,
        cipheringModeInfo               CipheringModeInfo                   OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        ue-ConnTimersAndConstants       UE-ConnTimersAndConstants-r5        OPTIONAL,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfoFull              OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL
}

UtranMobilityInformation-v690ext-IEs ::= SEQUENCE {
    -- Core network IEs
        primary-plmn-Identity               PLMN-Identity                       OPTIONAL
}

UTRANMobilityInformation-r7-IEs ::= SEQUENCE {
    -- User equipment IEs
        integrityProtectionModeInfo     IntegrityProtectionModeInfo-r7      OPTIONAL,
        cipheringModeInfo               CipheringModeInfo-r7                OPTIONAL,
        new-U-RNTI                      U-RNTI                              OPTIONAL,
        new-C-RNTI                      C-RNTI                              OPTIONAL,
        ue-ConnTimersAndConstants       UE-ConnTimersAndConstants-r5        OPTIONAL,
    -- CN information elements
        cn-InformationInfo              CN-InformationInfoFull              OPTIONAL,
        primary-plmn-Identity           PLMN-Identity                       OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
        dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5    OPTIONAL
}

-- **************************************************
--
-- UTRAN MOBILITY INFORMATION CONFIRM
--
-- **************************************************

UTRANMobilityInformationConfirm ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        ul-IntegProtActivationInfo      IntegrityProtActivationInfo         OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                      OPTIONAL,
        -- dummy is not used in this version of the specification and
        -- it should be ignored by the receiver.
```

```
        dummy                           RB-ActivationTimeInfoList           OPTIONAL,
        ul-CounterSynchronisationInfo   UL-CounterSynchronisationInfo       OPTIONAL,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            utranMobilityInformationConfirm-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- UTRAN MOBILITY INFORMATION FAILURE
--
-- **************************************************

UTRANMobilityInformationFailure ::= SEQUENCE {
    -- UE information elements
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr,
        laterNonCriticalExtensions          SEQUENCE {
            -- Container for additional R99 extensions
            utranMobilityInformationFailure-r3-add-ext      BIT STRING      OPTIONAL,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

-- **************************************************
--
-- MBMS ACCESS INFORMATION
--
-- **************************************************

MBMSAccessInformation ::= SEQUENCE {
    -- Access Information IEs
        mbms-ServiceAccessInfoList      MBMS-ServiceAccessInfoList-r6,
    -- Non critical extensions
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

-- **************************************************
--
-- MBMS COMMON PTM RB INFORMATION
--
-- **************************************************

MBMSCommonPTMRBInformation ::= SEQUENCE {
    -- Common PTM RB Information IEs
        mbms-CommonRBInformationList    MBMS-CommonRBInformationList-r6,
        mbms-TranspChInfoForEachTrCh    MBMS-TranspChInfoForEachTrCh-r6,
        mbms-TranspChInfoForEachCCTrCh  MBMS-TranspChInfoForEachCCTrCh-r6   OPTIONAL,
        mbms-PhyChInformationList       MBMS-PhyChInformationList-r6,
    -- Non critical extensions
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

-- **************************************************
--
-- MBMS CURRENT CELL PTM RB INFORMATION
--
-- **************************************************

MBMSCurrentCellPTMRBInformation ::= SEQUENCE {
    -- Current Cell PTM RB Information IEs
        mbms-CurrentCell-SCCPCHList     MBMS-CurrentCell-SCCPCHList-r6      OPTIONAL,
        mbms-SIBType5-SCCPCHList        MBMS-SIBType5-SCCPCHList-r6         OPTIONAL,
    -- Non critical extensions
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

-- **************************************************
--
-- MBMS GENERAL INFORMATION
--
-- **************************************************

MBMSGeneralInformation ::= SEQUENCE {
    -- MBMS General Information IEs
        mbms-PreferredFrequencyInfo     MBMS-PreferredFrequencyList-r6      OPTIONAL,
```

```
        mbms-TimersAndCounters          MBMS-TimersAndCounters-r6,
        michConfigurationInfo           MBMS-MICHConfigurationInfo-r6,
        cellGroupIdentity               MBMS-CellGroupIdentity-r6,
        mschDefaultConfigurationInfo    MBMS-MSCH-ConfigurationInfo-r6      OPTIONAL,
    -- Non critical extensions
        v6b0NonCriticalExtensions       SEQUENCE {
            mbmsGeneralInformation-v6b0ext  MBMSGeneralInformation-v6b0ext-IEs,
            v7xyNonCriticalExtensions       SEQUENCE {
                mbmsGenerAlInformation-v7xyext  MBMSGeneralInformation-v7xyext-IEs,
                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
}

MBMSGeneralInformation-v6b0ext-IEs ::= SEQUENCE {
        indicateChangeInSelectedServices    BOOLEAN
}

MBMSGeneralInformation-v7xyext-IEs ::= SEQUENCE {
        mbmsMICHConfiguration-v7xyext   MBMS-MICHConfigurationInfo-r7       OPTIONAL
}

-- ************************************************
--
-- MBMS MODIFICATION REQUEST
--
-- ************************************************

MBMSModificationRequest ::= SEQUENCE {
    -- MBMS Modification Request IEs
        mbms-PreferredFreqRequest       MBMS-ServiceIdentity-r6             OPTIONAL,
        rb-InformationReleaseList       RB-InformationReleaseList           OPTIONAL,
    -- Non critical extensions
        v6b0NonCriticalExtensions       SEQUENCE {
            mbmsModificationRequest-v6b0ext MBMSModificationRequest-v6b0ext-IEs,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }       OPTIONAL
}

MBMSModificationRequest-v6b0ext-IEs ::= SEQUENCE {
        mbmsSelectedServiceInfo         MBMS-SelectedServiceInfo
}

-- ************************************************
--
-- MBMS MODIFIED SERVICES INFORMATION
--
-- ************************************************

MBMSModifiedServicesInformation ::= SEQUENCE {
    -- MBMS Modified Services Information IEs
        modifedServiceList              MBMS-ModifedServiceList-r6          OPTIONAL,
        mbms-ReacquireMCCH              ENUMERATED { true }                 OPTIONAL,
        mbms-DynamicPersistenceLevel    DynamicPersistenceLevel             OPTIONAL,
        endOfModifiedMCCHInformation    INTEGER (1..16)                     OPTIONAL,
        mbmsNumberOfNeighbourCells      MBMS-NumberOfNeighbourCells-r6,
        mbms-AllUnmodifiedPTMServices   ENUMERATED { true }                 OPTIONAL,
        mbms-PTMActivationTime          MBMS-PTMActivationTime-r6           OPTIONAL,
    -- Non critical extensions
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

-- ************************************************
--
-- MBMS NEIGHBOURING CELL PTM RB INFORMATION
--
-- ************************************************

MBMSNeighbouringCellPTMRBInformation ::= SEQUENCE {
    -- MBMS Neighbouring Cell PTM RB Information IEs
        neighbouringCellIdentity        IntraFreqCellID,
        neighbouringCellSCCPCHList      MBMS-NeighbouringCellSCCPCHList-r6,
    -- Non critical extensions
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

-- ************************************************
--
```

```
-- MBMS SCHEDULING INFORMATION
--
-- ************************************************

MBMSSchedulingInformation ::= SEQUENCE {
    -- MBMS Scheduling Information IEs
        serviceSchedulingInfoList       MBMS-ServiceSchedulingInfoList-r6,
    -- Non critical extensions
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

-- ************************************************
--
-- MBMS UNMODIFIED SERVICES INFORMATION
--
-- ************************************************

MBMSUnmodifiedServicesInformation ::= SEQUENCE {
    -- MBMS Unmodified Services Information IEs
        unmodifiedServiceList           MBMS-UnmodifiedServiceList-r6       OPTIONAL,
    -- Non critical extensions
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

END
```

11.3 Information element definitions

```
InformationElements DEFINITIONS AUTOMATIC TAGS ::=

-- ************************************************
--
--     CORE NETWORK INFORMATION ELEMENTS (10.3.1)
--
-- ************************************************

BEGIN

IMPORTS

    hiPDSCHidentities,
    hiPUSCHidentities,
    hiRM,
    maxAC,
    maxAdditionalMeas,
    maxASC,
    maxASCmap,
    maxASCpersist,
    maxCCTrCH,
    maxCellMeas,
    maxCellMeas-1,
    maxCNdomains,
    maxCPCHsets,
    maxDPCH-DLchan,
    maxDPDCH-UL,
    maxDRACclasses,
    maxE-DCHMACdFlow,
    maxE-DCHMACdFlow-1,
    maxFACHPCH,
    maxFreq,
    maxFreqBandsFDD,
    maxFreqBandsFDD-ext,
    maxFreqBandsTDD,
    maxFreqBandsGSM,
    maxGERAN-SI,
    maxHProcesses,
    maxHSDSCHTBIndex,
    maxHSDSCHTBIndex-tdd384,
    maxHSSCCHs,
    maxInterSysMessages,
    maxLoCHperRLC,
    maxMAC-d-PDUsizes,
    maxMBMS-CommonCCTrCh,
    maxMBMS-CommonPhyCh,
    maxMBMS-CommonRB,
    maxMBMS-CommonTrCh,
    maxMBMS-Freq,
```

```
    maxMBMS-L1CP,
    maxMBMSservCount,
    maxMBMSservModif,
    maxMBMSservSched,
    maxMBMSservSelect,
    maxMBMSservUnmodif,
    maxMBMSTransmis,
    maxMeasEvent,
    maxMeasIntervals,
    maxMeasParEvent,
    maxNumCDMA2000Freqs,
    maxNumE-AGCH,
    maxNumFDDFreqs,
    maxNumGSMFreqRanges,
    maxGSMTargetCells,
    maxNumTDDFreqs,
    maxOtherRAT,
    maxOtherRAT-16,
    maxPage1,
    maxPCPCH-APsig,
    maxPCPCH-APsubCh,
    maxPCPCH-CDsig,
    maxPCPCH-CDsubCh,
    maxPCPCH-SF,
    maxPCPCHs,
    maxPDCPAlgoType,
    maxPDSCH,
    maxPDSCH-TFCIgroups,
    maxPRACH,
    maxPRACH-FPACH,
    maxPredefConfig,
    maxPUSCH,
    maxQueueIDs,
    maxRABsetup,
    maxRAT,
    maxRB,
    maxRBallRABs,
    maxRBperTrCh,
    maxRBMuxOptions,
    maxRBperRAB,
    maxReportedGSMCells,
    maxRLCPDUsizePerLogChan,
    maxSRBsetup,
    maxRL,
    maxRL-1,
    maxEDCHRL,
    maxROHC-PacketSizes-r4,
    maxROHC-Profile-r4,
    maxSCCPCH,
    maxSat,
    maxSIB,
    maxSIB-FACH,
    maxSystemCapability,
    maxTF,
    maxTF-CPCH,
    maxTFC,
    maxTFCsub,
    maxTFCI-2-Combs,
    maxTGPS,
    maxTrCH,
    maxTrCHpreconf,
    maxTS,
    maxTS-1,
    maxTS-2,
    maxTS-LCR,
    maxTS-LCR-1,
    maxURA,
    maxURNTI-Group
FROM Constant-definitions;

Ansi-41-IDNNS ::=                       BIT STRING (SIZE (14))

CN-DomainIdentity ::=               ENUMERATED {
                                        cs-domain,
                                        ps-domain }

CN-DomainInformation ::=            SEQUENCE {
    cn-DomainIdentity                   CN-DomainIdentity,
    cn-DomainSpecificNAS-Info           NAS-SystemInformationGSM-MAP
```

```
}

CN-DomainInformationFull ::=        SEQUENCE {
    cn-DomainIdentity                   CN-DomainIdentity,
    cn-DomainSpecificNAS-Info           NAS-SystemInformationGSM-MAP,
    cn-DRX-CycleLengthCoeff             CN-DRX-CycleLengthCoefficient
}

CN-DomainInformationList ::=        SEQUENCE (SIZE (1..maxCNdomains)) OF
                                        CN-DomainInformation

CN-DomainInformationListFull ::=    SEQUENCE (SIZE (1..maxCNdomains)) OF
                                        CN-DomainInformationFull

CN-DomainSysInfo ::=                SEQUENCE {
    cn-DomainIdentity                   CN-DomainIdentity,
    cn-Type                             CHOICE {
        gsm-MAP                             NAS-SystemInformationGSM-MAP,
        ansi-41                             NAS-SystemInformationANSI-41
    },
    cn-DRX-CycleLengthCoeff             CN-DRX-CycleLengthCoefficient
}

CN-DomainSysInfoList ::=            SEQUENCE (SIZE (1..maxCNdomains)) OF
                                        CN-DomainSysInfo

CN-InformationInfo ::=              SEQUENCE {
    plmn-Identity                       PLMN-Identity                       OPTIONAL,
    cn-CommonGSM-MAP-NAS-SysInfo        NAS-SystemInformationGSM-MAP        OPTIONAL,
    cn-DomainInformationList            CN-DomainInformationList            OPTIONAL
}

CN-InformationInfo-r6 ::=           SEQUENCE {
    plmn-Identity                       PLMN-Identity                       OPTIONAL,
    cn-CommonGSM-MAP-NAS-SysInfo        NAS-SystemInformationGSM-MAP        OPTIONAL,
    cn-DomainInformationList            CN-DomainInformationList            OPTIONAL,
    primary-plmn-Identity               PLMN-Identity                       OPTIONAL
}

CN-InformationInfoFull ::=          SEQUENCE {
    plmn-Identity                       PLMN-Identity                       OPTIONAL,
    cn-CommonGSM-MAP-NAS-SysInfo        NAS-SystemInformationGSM-MAP        OPTIONAL,
    cn-DomainInformationListFull        CN-DomainInformationListFull        OPTIONAL
}

Digit ::=                           INTEGER (0..9)

Gsm-map-IDNNS ::=                           SEQUENCE {
    routingbasis                                    CHOICE {
        localPTMSI                                      SEQUENCE {
            routingparameter                                RoutingParameter
        },
        tMSIofsamePLMN                                  SEQUENCE {
            routingparameter                                RoutingParameter
        },
        tMSIofdifferentPLMN                             SEQUENCE {
            routingparameter                                RoutingParameter
        },
        iMSIresponsetopaging                            SEQUENCE {
            routingparameter                                RoutingParameter
        },
        iMSIcauseUEinitiatedEvent                       SEQUENCE {
            routingparameter                                RoutingParameter
        },
        iMEI                                            SEQUENCE {
            routingparameter                                RoutingParameter
        },
        spare2                                          SEQUENCE {
            routingparameter                                RoutingParameter
        },
        spare1                                          SEQUENCE {
            routingparameter                                RoutingParameter
        }
    },
    -- dummy is not used in this version of the specification and
    -- it should be ignored by the receiver.
    dummy                                   BOOLEAN
}
```

```
IMEI ::=                                SEQUENCE (SIZE (15)) OF
                                            IMEI-Digit

IMEI-Digit ::=                          INTEGER (0..15)

IMSI-GSM-MAP ::=                        SEQUENCE (SIZE (6..21)) OF
                                            Digit

IntraDomainNasNodeSelector ::=                      SEQUENCE {
    version                                             CHOICE {
        release99                                           SEQUENCE {
            cn-Type                                             CHOICE {
                gsm-Map-IDNNS                                       Gsm-map-IDNNS,
                ansi-41-IDNNS                                       Ansi-41-IDNNS
            }
        },
        later                                               SEQUENCE {
            futurecoding                                        BIT STRING (SIZE (15))
        }
    }
}

LAI ::=                                 SEQUENCE {
    plmn-Identity                           PLMN-Identity,
    lac                                     BIT STRING (SIZE (16))
}

MCC ::=                                 SEQUENCE (SIZE (3)) OF
                                            Digit

MNC ::=                                 SEQUENCE (SIZE (2..3)) OF
                                            Digit


MultiplePLMN-List-r6 ::=                SEQUENCE {
    mibPLMN-Identity                        BOOLEAN,
    multiplePLMNs                           SEQUENCE (SIZE (1..5)) OF
                                                PLMN-IdentityWithOptionalMCC-r6
}

NAS-Message ::=                         OCTET STRING (SIZE (1..4095))

NAS-Synchronisation-Indicator ::=       BIT STRING(SIZE(4))

NAS-SystemInformationGSM-MAP ::=        OCTET STRING (SIZE (1..8))

P-TMSI-GSM-MAP ::=                      BIT STRING (SIZE (32))

PagingRecordTypeID ::=                  ENUMERATED {
                                            imsi-GSM-MAP,
                                            tmsi-GSM-MAP-P-TMSI,
                                            imsi-DS-41,
                                            tmsi-DS-41 }


PLMN-Identity ::=                       SEQUENCE {
    mcc                                     MCC,
    mnc                                     MNC
}

PLMN-IdentityWithOptionalMCC-r6 ::= SEQUENCE {
    mcc                                     MCC                     OPTIONAL,
    mnc                                     MNC
}

PLMN-Type ::=                           CHOICE {
    gsm-MAP                                 SEQUENCE {
        plmn-Identity                           PLMN-Identity
    },
    ansi-41                             SEQUENCE {
        p-REV                               P-REV,
        min-P-REV                           Min-P-REV,
        sid                                 SID,
        nid                                 NID
    },
    gsm-MAP-and-ANSI-41                 SEQUENCE {
        plmn-Identity                       PLMN-Identity,
        p-REV                               P-REV,
        min-P-REV                           Min-P-REV,
```

```
        sid                             SID,
        nid                             NID
    },
    spare                           NULL
}

RAB-Identity ::=                    CHOICE {
    gsm-MAP-RAB-Identity                BIT STRING (SIZE (8)),
    ansi-41-RAB-Identity                BIT STRING (SIZE (8))
}

RAI ::=                             SEQUENCE {
    lai                                 LAI,
    rac                                 RoutingAreaCode
}

RoutingAreaCode ::=                 BIT STRING (SIZE (8))

RoutingParameter ::=                            BIT STRING (SIZE (10))

TMSI-GSM-MAP ::=                    BIT STRING (SIZE (32))

-- ************************************************
--
--     UTRAN MOBILITY INFORMATION ELEMENTS (10.3.2)
--
-- ************************************************

AccessClassBarred ::=               ENUMERATED {
                                        barred, notBarred }

AccessClassBarredList ::=           SEQUENCE (SIZE (maxAC)) OF
                                        AccessClassBarred

AllowedIndicator ::=                ENUMERATED {
                                        allowed, notAllowed }

CellAccessRestriction ::=           SEQUENCE {
    cellBarred                          CellBarred,
    cellReservedForOperatorUse          ReservedIndicator,
    cellReservationExtension            ReservedIndicator,
    -- NOTE: IE accessClassBarredList should not be included if the IE CellAccessRestriction
    -- is included in the IE SysInfoType4
    accessClassBarredList               AccessClassBarredList               OPTIONAL
}

CellBarred ::=                      CHOICE {
    barred                              SEQUENCE {
        intraFreqCellReselectionInd         AllowedIndicator,
        t-Barred                            T-Barred
    },
    notBarred                           NULL
}

CellIdentity ::=                    BIT STRING (SIZE (28))

CellIdentity-PerRL-List ::=         SEQUENCE (SIZE (1..maxRL)) OF CellIdentity

CellSelectReselectInfoSIB-3-4 ::=   SEQUENCE {
    mappingInfo                         MappingInfo                         OPTIONAL,
    cellSelectQualityMeasure            CHOICE {
        cpich-Ec-N0                         SEQUENCE {
            -- Default value for q-HYST-2-S is q-HYST-1-S
            q-HYST-2-S                          Q-Hyst-S                    OPTIONAL
            -- Default value for q-HYST-2-S is q-HYST-1-S
        },
        cpich-RSCP                          NULL
    },
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            s-Intrasearch                       S-SearchQual                OPTIONAL,
            s-Intersearch                       S-SearchQual                OPTIONAL,
            s-SearchHCS                         S-SearchRXLEV               OPTIONAL,
            rat-List                            RAT-FDD-InfoList            OPTIONAL,
            q-QualMin                           Q-QualMin,
            q-RxlevMin                          Q-RxlevMin
        },
        tdd                                 SEQUENCE {
```

```
            s-Intrasearch                       S-SearchRXLEV               OPTIONAL,
            s-Intersearch                       S-SearchRXLEV               OPTIONAL,
            s-SearchHCS                         S-SearchRXLEV               OPTIONAL,
            rat-List                            RAT-TDD-InfoList            OPTIONAL,
            q-RxlevMin                          Q-RxlevMin
        }
    },
    q-Hyst-l-S                          Q-Hyst-S,
    t-Reselection-S                     T-Reselection-S,
    hcs-ServingCellInformation          HCS-ServingCellInformation          OPTIONAL,
    maxAllowedUL-TX-Power               MaxAllowedUL-TX-Power
}

DomainSpecificAccessRestrictionForSharedNetwork-v670ext ::= CHOICE {
        domainSpecificAccessRestictionList                  DomainSpecificAccessRestrictionList-
v670ext,
        domainSpecificAccessRestictionParametersForAll      DomainSpecificAccessRestrictionParam-
v670ext
}

DomainSpecificAccessRestrictionList-v670ext ::= SEQUENCE {
        domainSpecificAccessRestrictionParametersForOperator1
                                    DomainSpecificAccessRestrictionParam-v670ext    OPTIONAL,
        domainSpecificAccessRestrictionParametersForOperator2
                                    DomainSpecificAccessRestrictionParam-v670ext    OPTIONAL,
        domainSpecificAccessRestrictionParametersForOperator3
                                    DomainSpecificAccessRestrictionParam-v670ext    OPTIONAL,
        domainSpecificAccessRestrictionParametersForOperator4
                                    DomainSpecificAccessRestrictionParam-v670ext    OPTIONAL,
        domainSpecificAccessRestrictionParametersForOperator5
                                    DomainSpecificAccessRestrictionParam-v670ext    OPTIONAL
}

DomainSpecificAccessRestrictionParam-v670ext ::= SEQUENCE {
        cSDomainSpecificAccessRestriction       DomainSpecificAccessRestriction-v670ext,
        pSDomainSpecificAccessRestriction       DomainSpecificAccessRestriction-v670ext
}

DomainSpecificAccessRestriction-v670ext ::= CHOICE {
        noRestriction       NULL,
        restriction         SEQUENCE {
            domainSpecficAccessClassBarredList      AccessClassBarredList   OPTIONAL
        }
}

MapParameter ::=                    INTEGER (0..99)

Mapping ::=                         SEQUENCE {
    rat                                 RAT,
    mappingFunctionParameterList        MappingFunctionParameterList
}

Mapping-LCR-r4 ::=                  SEQUENCE {
    mappingFunctionParameterList        MappingFunctionParameterList
}

MappingFunctionParameter ::=        SEQUENCE {
    functionType                        MappingFunctionType,
    mapParameter1                       MapParameter                        OPTIONAL,
    mapParameter2                       MapParameter,
    -- The presence of upperLimit is conditional on the number of repetition
    upperLimit                          UpperLimit                          OPTIONAL
}

MappingFunctionParameterList ::=    SEQUENCE (SIZE (1..maxMeasIntervals)) OF
                                        MappingFunctionParameter

MappingFunctionType ::=             ENUMERATED {
                                        linear,
                                        functionType2,
                                        functionType3,
                                        functionType4 }

-- In MappingInfo list, mapping for FDD and 3.84Mcps TDD is defined.
-- For 1.28Mcps TDD, Mapping-LCR-r4 is used instead.
MappingInfo ::=                     SEQUENCE (SIZE (1..maxRAT)) OF
                                        Mapping
```

```
-- Actual value Q-Hyst-S = IE value * 2
Q-Hyst-S ::=                        INTEGER (0..20)

Q-Hyst-S-Fine ::= INTEGER (0..40)

RAT ::=                             ENUMERATED {
                                        utra-FDD,
                                        utra-TDD,
                                        gsm,
                                        cdma2000 }

RAT-FDD-Info ::=                    SEQUENCE {
    rat-Identifier                      RAT-Identifier,
    s-SearchRAT                         S-SearchQual,
    s-HCS-RAT                           S-SearchRXLEV                           OPTIONAL,
    s-Limit-SearchRAT                   S-SearchQual
}

RAT-FDD-InfoList ::=                SEQUENCE (SIZE (1..maxOtherRAT)) OF
                                        RAT-FDD-Info

RAT-Identifier ::=                  ENUMERATED {
                                        gsm, cdma2000 }

RAT-TDD-Info ::=                    SEQUENCE {
    rat-Identifier                      RAT-Identifier,
    s-SearchRAT                         S-SearchRXLEV,
    s-HCS-RAT                           S-SearchRXLEV                       OPTIONAL,
    s-Limit-SearchRAT                   S-SearchRXLEV
}

RAT-TDD-InfoList ::=                SEQUENCE (SIZE (1..maxOtherRAT)) OF
                                        RAT-TDD-Info

ReservedIndicator ::=               ENUMERATED {
                                        reserved,
                                        notReserved }

-- Actual value S-SearchQual = IE value * 2
S-SearchQual ::=                        INTEGER (-16..10)

-- Actual value S-SearchRXLEV = (IE value * 2) + 1
S-SearchRXLEV ::=                       INTEGER (-53..45)

-- Actual value ScalingFactor = IE value * 0.1
SpeedDependentScalingFactor ::=     INTEGER (0..10)

T-Barred ::=                        ENUMERATED {
                                        s10, s20, s40, s80,
                                        s160, s320, s640, s1280 }

T-Reselection-S ::=                 INTEGER (0..31)

-- Actual value T-Reselection-S-Fine = IE value * 0.2
T-Reselection-S-Fine ::=            INTEGER (0..31)

-- Actual value ScalingFactor = IE value * 0.25
TreselectionScalingFactor ::=       INTEGER (4..19)

-- For UpperLimit, the used range depends on the RAT used.
UpperLimit ::=                      INTEGER (1..91)

URA-Identity ::=                    BIT STRING (SIZE (16))

URA-IdentityList ::=                SEQUENCE (SIZE (1..maxURA)) OF
                                        URA-Identity

-- ************************************************
--
--     USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
--
-- ************************************************

AccessStratumReleaseIndicator ::=   ENUMERATED {
                                        rel-4, rel-5, rel-6, rel-7,
                                        spare12, spare11, spare10, spare9, spare8,
                                        spare7, spare6, spare5, spare4, spare3,
                                        spare2, spare1 }
```

```
-- TABULAR : for ActivationTime, value 'now' always appear as default, and is encoded
-- by absence of the field
ActivationTime ::=                  INTEGER (0..255)

BackoffControlParams ::=            SEQUENCE {
    n-AP-RetransMax                     N-AP-RetransMax,
    n-AccessFails                       N-AccessFails,
    nf-BO-NoAICH                        NF-BO-NoAICH,
    ns-BO-Busy                          NS-BO-Busy,
    nf-BO-AllBusy                       NF-BO-AllBusy,
    nf-BO-Mismatch                      NF-BO-Mismatch,
    t-CPCH                              T-CPCH
}

C-RNTI ::=                          BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::=     SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement  BOOLEAN,
    -- ue-RadioCapabilityTDDUpdateRequirement is for 3.84Mcps TDD update requirement
    ue-RadioCapabilityTDDUpdateRequirement  BOOLEAN,
    systemSpecificCapUpdateReqList      SystemSpecificCapUpdateReqList      OPTIONAL
}

CapabilityUpdateRequirement-r4-ext ::= SEQUENCE {
    ue-RadioCapabilityUpdateRequirement-TDD128  BOOLEAN
}

CapabilityUpdateRequirement-r4 ::=  SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD  BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD384   BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD128   BOOLEAN,
    systemSpecificCapUpdateReqList      SystemSpecificCapUpdateReqList      OPTIONAL
}

CapabilityUpdateRequirement-r7-ext ::= SEQUENCE {
    ue-RadioCapabilityUpdateRequirement-TDD768  BOOLEAN
}

-- If the IE CellUpdateCause has the value 'cellUpdateCause-ext', the actual value is
-- defined in the IE CellUpdateCause-ext.
CellUpdateCause ::=                 ENUMERATED {
                                        cellReselection,
                                        periodicalCellUpdate,
                                        uplinkDataTransmission,
                                        utran-pagingResponse,
                                        re-enteredServiceArea,
                                        radiolinkFailure,
                                        rlc-unrecoverableError,
                                        cellUpdateCause-ext }

-- The IE CellUpdateCause-ext shall be present, if the IE CellUpdateCause has the
-- value 'cellUpdateCause-ext'.
-- dummy is not used in this version of the specification, it should not be sent
-- and if received it should be ignored by the receiver.
CellUpdateCause-ext ::=             ENUMERATED {
                                        mbms-Reception,
                                        mbms-PTP-RB-Request,
                                        dummy,
                                        spare1 }


ChipRateCapability ::=              ENUMERATED {
                                        mcps3-84, mcps1-28 }

ChipRateCapability-r7 ::=               ENUMERATED {
                                        mcps3-84, mcps7-68, mcps1-28 }

CipheringAlgorithm ::=              ENUMERATED {
                                        uea0, uea1 }

CipheringAlgorithm-r7 ::=           ENUMERATED {
                                        uea0, uea1, uea2 }

CipheringModeCommand ::=            CHOICE {
    startRestart                        CipheringAlgorithm,
    dummy                       NULL
}
```

```
CipheringModeCommand-r7 ::=         CHOICE {
    startRestart                        CipheringAlgorithm-r7
}

CipheringModeInfo ::=               SEQUENCE {
    -- TABULAR: The ciphering algorithm is included in the CipheringModeCommand.
    cipheringModeCommand                CipheringModeCommand,
    activationTimeForDPCH               ActivationTime                      OPTIONAL,
    rb-DL-CiphActivationTimeInfo        RB-ActivationTimeInfoList           OPTIONAL
}

CipheringModeInfo-r7 ::=            SEQUENCE {
    -- TABULAR: The ciphering algorithm is included in the CipheringModeCommand.
    cipheringModeCommand                CipheringModeCommand-r7,
    activationTimeForDPCH               ActivationTime                      OPTIONAL,
    rb-DL-CiphActivationTimeInfo        RB-ActivationTimeInfoList           OPTIONAL
}

CN-DRX-CycleLengthCoefficient ::=   INTEGER (6..9)

CN-PagedUE-Identity ::=             CHOICE {
    imsi-GSM-MAP                        IMSI-GSM-MAP,
    tmsi-GSM-MAP                        TMSI-GSM-MAP,
    p-TMSI-GSM-MAP                      P-TMSI-GSM-MAP,
    imsi-DS-41                          IMSI-DS-41,
    tmsi-DS-41                          TMSI-DS-41,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}

CompressedModeMeasCapability ::=    SEQUENCE {
    fdd-Measurements                    BOOLEAN,
    -- TABULAR: The IEs tdd-Measurements, gsm-Measurements and multiCarrierMeasurements
    -- are made optional since they are conditional based on another information element.
    -- Their absence corresponds to the case where the condition is not true.
    tdd-Measurements                    BOOLEAN                             OPTIONAL,
    gsm-Measurements                    GSM-Measurements                    OPTIONAL,
    multiCarrierMeasurements            BOOLEAN                             OPTIONAL
}

CompressedModeMeasCapability-LCR-r4 ::= SEQUENCE {
    tdd128-Measurements                     BOOLEAN                         OPTIONAL
}

CompressedModeMeasCapabFDDList ::=  SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                        CompressedModeMeasCapabFDD

CompressedModeMeasCapabFDDList2 ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                        CompressedModeMeasCapabFDD2

CompressedModeMeasCapabFDDList-ext ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                            CompressedModeMeasCapabFDD-ext

CompressedModeMeasCapabFDD ::=      SEQUENCE {
    radioFrequencyBandFDD               RadioFrequencyBandFDD   OPTIONAL,
    dl-MeasurementsFDD                  BOOLEAN,
    ul-MeasurementsFDD                  BOOLEAN
}

CompressedModeMeasCapabFDD2 ::=     SEQUENCE {
    -- UE may omit both IEs if this IE indicates the compressed mode capability within the same
    -- frequency band. Otherwise, the UE shall include either one of the following OPTIONAL IEs.
    radioFrequencyBandFDD               RadioFrequencyBandFDD   OPTIONAL,
    radioFrequencyBandFDD2              RadioFrequencyBandFDD2  OPTIONAL,
    dl-MeasurementsFDD                  BOOLEAN,
    ul-MeasurementsFDD                  BOOLEAN
}

CompressedModeMeasCapabFDD-ext ::=      SEQUENCE {
    radioFrequencyBandFDD2              RadioFrequencyBandFDD2,
    dl-MeasurementsFDD                  BOOLEAN,
    ul-MeasurementsFDD                  BOOLEAN
}

CompressedModeMeasCapabTDDList ::=  SEQUENCE (SIZE (1..maxFreqBandsTDD)) OF
                                        CompressedModeMeasCapabTDD
```

```
CompressedModeMeasCapabTDD ::=      SEQUENCE {
    radioFrequencyBandTDD               RadioFrequencyBandTDD,
    dl-MeasurementsTDD                  BOOLEAN,
    ul-MeasurementsTDD                  BOOLEAN
}

CompressedModeMeasCapabGSMList ::=  SEQUENCE (SIZE (1..maxFreqBandsGSM)) OF
                                        CompressedModeMeasCapabGSM

CompressedModeMeasCapabGSM ::=      SEQUENCE {
    radioFrequencyBandGSM               RadioFrequencyBandGSM,
    dl-MeasurementsGSM                  BOOLEAN,
    ul-MeasurementsGSM                  BOOLEAN
}

CompressedModeMeasCapabMC ::=       SEQUENCE {
    dl-MeasurementsMC                   BOOLEAN,
    ul-MeasurementsMC                   BOOLEAN
}

CPCH-Parameters ::=                 SEQUENCE {
    initialPriorityDelayList            InitialPriorityDelayList            OPTIONAL,
    backoffControlParams                BackoffControlParams,
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    powerControlAlgorithm               PowerControlAlgorithm,
    dl-DPCCH-BER                        DL-DPCCH-BER
}

DL-CapabilityWithSimultaneousHS-DSCHConfig ::=  ENUMERATED{kbps32, kbps64, kbps128, kbps384}

DL-DPCCH-BER ::=                    INTEGER (0..63)

DL-PhysChCapabilityFDD ::=          SEQUENCE {
    -- The IE "maxNoDPCH-PDSCH-Codes" only gives information on the maximum number of DPCH Codes.
    maxNoDPCH-PDSCH-Codes               INTEGER (1..8),
    maxNoPhysChBitsReceived             MaxNoPhysChBitsReceived,
    supportForSF-512                    BOOLEAN,
    -- dummy and dummy2 are not used in this version of the specification
    -- and if received they should be ignored.
    dummy                               BOOLEAN,
    dummy2                              SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityFDD-v380ext ::=          SEQUENCE {
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                                   SupportOfDedicatedPilotsForChEstimation     OPTIONAL
}

SupportOfDedicatedPilotsForChEstimation ::=         ENUMERATED { true }

DL-PhysChCapabilityTDD ::=          SEQUENCE {
    maxTS-PerFrame                      MaxTS-PerFrame,
    maxPhysChPerFrame                   MaxPhysChPerFrame,
    minimumSF                           MinimumSF-DL,
    supportOfPDSCH                      BOOLEAN,
    maxPhysChPerTS                      MaxPhysChPerTS
}

DL-PhysChCapabilityTDD-LCR-r4 ::=   SEQUENCE {
    maxTS-PerSubFrame                   MaxTS-PerSubFrame-r4,
    maxPhysChPerFrame                   MaxPhysChPerSubFrame-r4,
    minimumSF                           MinimumSF-DL,
    supportOfPDSCH                      BOOLEAN,
    maxPhysChPerTS                      MaxPhysChPerTS,
    supportOf8PSK                       BOOLEAN
}

DL-PhysChCapabilityTDD-768 ::=      SEQUENCE {
    maxTS-PerFrame                      MaxTS-PerFrame,
    maxPhysChPerFrame                   MaxPhysChPerFrame-768,
    minimumSF                           MinimumSF-DL-768,
    supportOfPDSCH                      BOOLEAN,
    maxPhysChPerTS                      MaxPhysChPerTS-768
}

DL-TransChCapability ::=            SEQUENCE {
```

```
    maxNoBitsReceived                   MaxNoBits,
    maxConvCodeBitsReceived             MaxNoBits,
    turboDecodingSupport                TurboSupport,
    maxSimultaneousTransChs             MaxSimultaneousTransChsDL,
    maxSimultaneousCCTrCH-Count         MaxSimultaneousCCTrCH-Count,
    maxReceivedTransportBlocks          MaxTransportBlocksDL,
    maxNumberOfTFC                      MaxNumberOfTFC-DL,
    maxNumberOfTF                       MaxNumberOfTF
}

DRAC-SysInfo ::=                    SEQUENCE {
    transmissionProbability             TransmissionProbability,
    maximumBitRate                      MaximumBitRate
}

DRAC-SysInfoList ::=                SEQUENCE (SIZE (1..maxDRACclasses)) OF
                                        DRAC-SysInfo

DSCH-RNTI ::=                       BIT STRING (SIZE (16))

DelayRestrictionFlag ::=            ENUMERATED { true }

E-RNTI ::=                          BIT STRING (SIZE (16))

ESN-DS-41 ::=                       BIT STRING (SIZE (32))

EstablishmentCause ::=              ENUMERATED {
                                        originatingConversationalCall,
                                        originatingStreamingCall,
                                        originatingInteractiveCall,
                                        originatingBackgroundCall,
                                        originatingSubscribedTrafficCall,
                                        terminatingConversationalCall,
                                        terminatingStreamingCall,
                                        terminatingInteractiveCall,
                                        terminatingBackgroundCall,
                                        emergencyCall,
                                        interRAT-CellReselection,
                                        interRAT-CellChangeOrder,
                                        registration,
                                        detach,
                                        originatingHighPrioritySignalling,
                                        originatingLowPrioritySignalling,
                                        callRe-establishment,
                                        terminatingHighPrioritySignalling,
                                        terminatingLowPrioritySignalling,
                                        terminatingCauseUnknown,
                                        mbms-Reception,
                                        mbms-PTP-RB-Request,
                                        spare10,
                                        spare9,
                                        spare8,
                                        spare7,
                                        spare6,
                                        spare5,
                                        spare4,
                                        spare3,
                                        spare2,
                                        spare1 }

FailureCauseWithProtErr ::=         CHOICE {
    configurationUnsupported            NULL,
    physicalChannelFailure              NULL,
    incompatibleSimultaneousReconfiguration
                                        NULL,
    compressedModeRuntimeError          TGPSI,
    protocolError                       ProtocolErrorInformation,
    cellUpdateOccurred                  NULL,
    invalidConfiguration                NULL,
    configurationIncomplete             NULL,
    unsupportedMeasurement              NULL,
    mbmsSessionAlreadyReceivedCorrectly NULL,
    lowerPriorityMBMSService            NULL,
    spare5                              NULL,
    spare4                              NULL,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
```

```
}

FailureCauseWithProtErrTrId ::=     SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        failureCause                    FailureCauseWithProtErr
}

GroupIdentityWithReleaseInformation ::=     SEQUENCE {
        rrc-ConnectionReleaseInformation        RRC-ConnectionReleaseInformation,
        groupReleaseInformation                 GroupReleaseInformation
    }

GroupReleaseInformation ::=         SEQUENCE {
    uRNTI-Group                         U-RNTI-Group
}

GSM-Measurements ::=                SEQUENCE {
    gsm900                              BOOLEAN,
    dcs1800                             BOOLEAN,
    gsm1900                             BOOLEAN
}

H-RNTI ::=                          BIT STRING (SIZE (16))

High-MobilityDetected ::=           ENUMERATED { high-MobilityDetected }

HSDSCH-physical-layer-category ::=      INTEGER (1..64)

UESpecificBehaviourInformation1idle ::= BIT STRING (SIZE (4))

UESpecificBehaviourInformation1interRAT ::= BIT STRING (SIZE (8))


IMSI-and-ESN-DS-41 ::=              SEQUENCE {
    imsi-DS-41                          IMSI-DS-41,
    esn-DS-41                           ESN-DS-41
}

IMSI-DS-41 ::=                      OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::=        SEQUENCE (SIZE (1..maxASC)) OF
                                        NS-IP

InitialUE-Identity ::=              CHOICE {
    imsi                                IMSI-GSM-MAP,
    tmsi-and-LAI                        TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI                      P-TMSI-and-RAI-GSM-MAP,
    imei                                IMEI,
    esn-DS-41                           ESN-DS-41,
    imsi-DS-41                          IMSI-DS-41,
    imsi-and-ESN-DS-41                  IMSI-and-ESN-DS-41,
    tmsi-DS-41                          TMSI-DS-41
}

IntegrityCheckInfo ::=              SEQUENCE {
    messageAuthenticationCode           MessageAuthenticationCode,
    rrc-MessageSequenceNumber           RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::=     SEQUENCE {
    rrc-MessageSequenceNumberList       RRC-MessageSequenceNumberList
}

IntegrityProtectionAlgorithm ::=    ENUMERATED {
                                        uia1 }

IntegrityProtectionAlgorithm-r7 ::= ENUMERATED {
                                        uia1, uia2 }

IntegrityProtectionModeCommand ::=  CHOICE {
    startIntegrityProtection            SEQUENCE {
        integrityProtInitNumber             IntegrityProtInitNumber
    },
    modify                              SEQUENCE {
        dl-IntegrityProtActivationInfo      IntegrityProtActivationInfo
    }
}
```

```
IntegrityProtectionModeInfo ::=     SEQUENCE {
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionModeCommand      IntegrityProtectionModeCommand,
    integrityProtectionAlgorithm        IntegrityProtectionAlgorithm        OPTIONAL
}

IntegrityProtectionModeInfo-r7 ::=  SEQUENCE {
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionModeCommand      IntegrityProtectionModeCommand,
    integrityProtectionAlgorithm        IntegrityProtectionAlgorithm-r7     OPTIONAL
}

IntegrityProtInitNumber ::=         BIT STRING (SIZE (32))

-- dummy is not used in this version of the specification, it should
-- not be sent and if received it should be ignored.
MaxHcContextSpace ::=                   ENUMERATED  {
                                            dummy, by1024, by2048, by4096,
                                            by8192 }

MaxHcContextSpace-r5-ext ::=            ENUMERATED  {
                                            by16384, by32768, by65536, by131072 }


MaxROHC-ContextSessions-r4 ::=      ENUMERATED  {
                                            s2, s4, s8, s12, s16, s24, s32, s48,
                                            s64, s128, s256, s512, s1024, s16384 }

MaximumAM-EntityNumberRLC-Cap ::=   ENUMERATED {
                                        dummy, am4, am5, am6,
                                        am8, am16, am30 }

-- Actual value MaximumBitRate = IE value * 16
MaximumBitRate ::=                  INTEGER (0..32)

MaximumRLC-WindowSize ::=           ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::=      ENUMERATED {
                                        b600, b1200, b2400, b4800,
                                        b9600, b19200, b28800, b38400,
                                        b48000, b57600 }

MaxNoBits ::=                       ENUMERATED {
                                        b640, b1280, b2560, b3840, b5120,
                                        b6400, b7680, b8960, b10240,
                                        b20480, b40960, b81920, b163840 }

MaxNoPhysChBitsReceived ::=         ENUMERATED {
                                        dummy, b1200, b2400, b3600,
                                        b4800, b7200, b9600, b14400,
                                        b19200, b28800, b38400, b48000,
                                        b57600, b67200, b76800 }

MaxNoSCCPCH-RL ::=                  ENUMERATED {
                                        rl1 }

MaxNumberOfTF ::=                   ENUMERATED {
                                        tf32, tf64, tf128, tf256,
                                        tf512, tf1024 }

MaxNumberOfTFC-DL ::=               ENUMERATED {
                                        tfc16, tfc32, tfc48, tfc64, tfc96,
                                        tfc128, tfc256, tfc512, tfc1024 }

MaxNumberOfTFC-UL ::=               ENUMERATED {
                                        dummy1, dummy2, tfc16, tfc32, tfc48, tfc64,
                                        tfc96, tfc128, tfc256, tfc512, tfc1024 }

-- the values 1 …4 for MaxPhysChPerFrame are not used in this version of the protocol
MaxPhysChPerFrame ::=               INTEGER (1..224)

MaxPhysChPerFrame-768 ::=           INTEGER (1..448)

MaxPhysChPerSubFrame-r4 ::=         INTEGER (1..96)
```

```
MaxPhysChPerTimeslot ::=            ENUMERATED {
                                        ts1, ts2 }

-- the values 1 …4 for MaxPhysChPerTS are not used in this version of the protocol
MaxPhysChPerTS ::=                  INTEGER (1..16)

MaxPhysChPerTS-768 ::=              INTEGER (1..32)

MaxSimultaneousCCTrCH-Count ::=     INTEGER (1..8)

MaxSimultaneousTransChsDL ::=       ENUMERATED {
                                        e4, e8, e16, e32 }

MaxSimultaneousTransChsUL ::=       ENUMERATED {
                                        dummy, e4, e8, e16, e32 }

MaxTransportBlocksDL ::=            ENUMERATED {
                                        tb4, tb8, tb16, tb32, tb48,
                                        tb64, tb96, tb128, tb256, tb512 }

MaxTransportBlocksUL ::=            ENUMERATED {
                                        dummy, tb4, tb8, tb16, tb32, tb48,
                                        tb64, tb96, tb128, tb256, tb512 }

MaxTS-PerFrame ::=                  INTEGER (1..14)

MaxTS-PerSubFrame-r4 ::=            INTEGER (1..6)

-- TABULAR: MeasurementCapability contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.
MeasurementCapability ::=           SEQUENCE {
    downlinkCompressedMode              CompressedModeMeasCapability,
    uplinkCompressedMode                CompressedModeMeasCapability
}

MeasurementCapabilityExt ::=        SEQUENCE{
    compressedModeMeasCapabFDDList      CompressedModeMeasCapabFDDList,
    compressedModeMeasCapabTDDList      CompressedModeMeasCapabTDDList  OPTIONAL,
    compressedModeMeasCapabGSMList      CompressedModeMeasCapabGSMList  OPTIONAL,
    compressedModeMeasCapabMC           CompressedModeMeasCapabMC       OPTIONAL
}

MeasurementCapabilityExt2 ::=       SEQUENCE{
    compressedModeMeasCapabFDDList      CompressedModeMeasCapabFDDList2,
    compressedModeMeasCapabTDDList      CompressedModeMeasCapabTDDList  OPTIONAL,
    compressedModeMeasCapabGSMList      CompressedModeMeasCapabGSMList  OPTIONAL,
    compressedModeMeasCapabMC           CompressedModeMeasCapabMC       OPTIONAL
}


MeasurementCapability-r4-ext ::=    SEQUENCE {
    downlinkCompressedMode-LCR          CompressedModeMeasCapability-LCR-r4,
    uplinkCompressedMode-LCR            CompressedModeMeasCapability-LCR-r4
}

MessageAuthenticationCode ::=       BIT STRING (SIZE (32))

MinimumSF-DL ::=                    ENUMERATED {
                                        sf1, sf16 }

MinimumSF-DL-768 ::=                ENUMERATED {
                                        sf1, sf32 }

MinimumSF-UL ::=                    ENUMERATED {
                                        sf1, sf2, sf4, sf8, dummy }

MultiModeCapability ::=             ENUMERATED {
                                        tdd, fdd, fdd-tdd }

MultiRAT-Capability ::=             SEQUENCE {
    supportOfGSM                        BOOLEAN,
    supportOfMulticarrier               BOOLEAN
}

MultiModeRAT-Capability-v590ext ::= SEQUENCE {
    supportOfUTRAN-ToGERAN-NACC         BOOLEAN
}
```

```
MultiModeRAT-Capability-v680ext ::= SEQUENCE {
    supportOfHandoverToGAN              ENUMERATED { doesSupportHandoverToGAN }     OPTIONAL
}

N-300 ::=                           INTEGER (0..7)

N-301 ::=                           INTEGER (0..7)

N-302 ::=                           INTEGER (0..7)

N-304 ::=                           INTEGER (0..7)

N-308 ::=                           INTEGER (1..8)

N-310 ::=                           INTEGER (0..7)

N-312 ::=                           ENUMERATED {
                                        s1, s50, s100, s200, s400,
                                        s600, s800, s1000 }

N-312ext ::=                        ENUMERATED {
                                        s2, s4, s10, s20 }

N-312-r5 ::=                            ENUMERATED {
                                        s1, s2, s4, s10, s20,
                                        s50, s100, s200, s400,
                                        s600, s800, s1000 }

N-313 ::=                           ENUMERATED {
                                        s1, s2, s4, s10, s20,
                                         s50, s100, s200 }

N-315 ::=                           ENUMERATED {
                                        s1, s50, s100, s200, s400,
                                        s600, s800, s1000 }

N-315ext ::=                        ENUMERATED {
                                        s2, s4, s10, s20 }

N-315-r5 ::=                            ENUMERATED {
                                        s1, s2, s4, s10, s20,
                                        s50, s100, s200, s400,
                                        s600, s800, s1000 }


N-AccessFails ::=                   INTEGER (1..64)

N-AP-RetransMax ::=                 INTEGER (1..64)

NetworkAssistedGPS-Supported ::=    ENUMERATED {
                                        networkBased,
                                        ue-Based,
                                        bothNetworkAndUE-Based,
                                        noNetworkAssistedGPS }

NF-BO-AllBusy ::=                   INTEGER (0..31)

NF-BO-NoAICH ::=                    INTEGER (0..31)

NF-BO-Mismatch ::=                  INTEGER (0..127)

NS-BO-Busy ::=                      INTEGER (0..63)

NS-IP ::=                           INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::=          SEQUENCE {
    p-TMSI                              P-TMSI-GSM-MAP,
    rai                                 RAI
}

PagingCause ::=                     ENUMERATED {
                                        terminatingConversationalCall,
                                        terminatingStreamingCall,
                                        terminatingInteractiveCall,
                                        terminatingBackgroundCall,
                                        terminatingHighPrioritySignalling,
                                        terminatingLowPrioritySignalling,
```

```
                                    terminatingCauseUnknown,
                                    spare
 }

PagingRecord ::=                    CHOICE {
    cn-Identity                         SEQUENCE {
        pagingCause                         PagingCause,
        cn-DomainIdentity                   CN-DomainIdentity,
        cn-pagedUE-Identity                 CN-PagedUE-Identity
    },
    utran-Identity                      SEQUENCE {
        u-RNTI                              U-RNTI,
        cn-OriginatedPage-connectedMode-UE  SEQUENCE {
            pagingCause                         PagingCause,
            cn-DomainIdentity                   CN-DomainIdentity,
            pagingRecordTypeID                  PagingRecordTypeID
        }                                                               OPTIONAL
    }
}

PagingRecord2-r5 ::=                CHOICE {
    utran-SingleUE-Identity             SEQUENCE {
        u-RNTI                              U-RNTI,
        cn-OriginatedPage-connectedMode-UE  SEQUENCE {
            pagingCause                         PagingCause,
            cn-DomainIdentity                   CN-DomainIdentity,
            pagingRecordTypeID                  PagingRecordTypeID
        }                                                               OPTIONAL,
        rrc-ConnectionReleaseInformation    RRC-ConnectionReleaseInformation
    },
    utran-GroupIdentity                 SEQUENCE ( SIZE (1 .. maxURNTI-Group) ) OF
                                            GroupIdentityWithReleaseInformation
}

PagingRecordList ::=                SEQUENCE (SIZE (1..maxPage1)) OF
                                        PagingRecord

PagingRecord2List-r5 ::=            SEQUENCE (SIZE (1..maxPage1)) OF
                                        PagingRecord2-r5

PDCP-Capability ::=                 SEQUENCE {
    losslessSRNS-RelocationSupport      BOOLEAN,
    -- If present, the "maxHcContextSpace" in the IE "PDCP-Capability-r5-ext" overrides the
    -- "supported" value in this IE. The value in this IE may be used by a pre-REL-5 UTRAN.
    supportForRfc2507                   CHOICE {
        notSupported                        NULL,
        supported                           MaxHcContextSpace
    }
}

PDCP-Capability-r4-ext ::=          SEQUENCE {
    supportForRfc3095               CHOICE {
        notSupported                        NULL,
        supported                           SEQUENCE {
            maxROHC-ContextSessions             MaxROHC-ContextSessions-r4  DEFAULT s16,
            reverseCompressionDepth             INTEGER (0..65535)          DEFAULT 0
        }
    }
}

PDCP-Capability-r5-ext ::=          SEQUENCE {
    supportForRfc3095ContextRelocation      BOOLEAN,
    maxHcContextSpace                       MaxHcContextSpace-r5-ext    OPTIONAL
}

PDCP-Capability-r5-ext2 ::=         SEQUENCE {
    losslessDLRLC-PDUSizeChange         ENUMERATED { true }                 OPTIONAL
}

PhysicalChannelCapability ::=       SEQUENCE {
        fddPhysChCapability                 SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityFDD,
            uplinkPhysChCapability              UL-PhysChCapabilityFDD
        }                                           OPTIONAL,
        -- tddPhysChCapability describes the 3.84Mcps TDD physical channel capability
        tddPhysChCapability                 SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityTDD,
            uplinkPhysChCapability              UL-PhysChCapabilityTDD
```

```
        }                                           OPTIONAL
}

PhysicalChannelCapability-r7 ::=        SEQUENCE {
        fddPhysChCapability                 SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityFDD,
            uplinkPhysChCapability              UL-PhysChCapabilityFDD
        }                                           OPTIONAL,
        -- tddPhysChCapability describes the 3.84Mcps TDD physical channel capability
        tddPhysChCapability                 SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityTDD,
            uplinkPhysChCapability              UL-PhysChCapabilityTDD
        }                                           OPTIONAL,
        -- tddPhysicalChaCapability-768 describes the 7.68 TDD physical channel capability
        tddPhysChCapability-768             SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityTDD-768,
            uplinkPhysChCapability              UL-PhysChCapabilityTDD
        }
}

-- PhysicalChannelCapability-LCR-r4 describes the 1.28Mcps TDD physical channel capability
PhysicalChannelCapability-LCR-r4 ::=        SEQUENCE {
        tdd128-PhysChCapability             SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityTDD-LCR-r4,
            uplinkPhysChCapability              UL-PhysChCapabilityTDD-LCR-r4
        }                                           OPTIONAL
}

-- PhysicalChannelCapability-hspdsch-r5 describes the HS-PDSCH physical channel capability
PhysicalChannelCapability-hspdsch-r5 ::=        SEQUENCE {
    fdd-hspdsch                                 CHOICE {
        supported                                   SEQUENCE {
            hsdsch-physical-layer-category              HSDSCH-physical-layer-category,
            -- dummy and dummy2 are not used in this version of the specification
            -- and if received they should be ignored.
            dummy                                       BOOLEAN,
            dummy2                                      BOOLEAN
        },
        unsupported                                 NULL
    },
    tdd384-hspdsch                              CHOICE {
        supported                                   HSDSCH-physical-layer-category,
        unsupported                                 NULL
    },
    tdd128-hspdsch                              CHOICE {
        supported                                   HSDSCH-physical-layer-category,
        unsupported                                 NULL
    }
}

PNBSCH-Allocation-r4 ::=                SEQUENCE {
        numberOfRepetitionsPerSFNPeriod ENUMERATED {
                                            c2, c3, c4, c5, c6, c7, c8, c9, c10,
                                            c12, c14, c16, c18, c20, c24, c28, c32,
                                            c36, c40, c48, c56, c64, c72, c80  }
}

ProtocolErrorCause ::=              ENUMERATED {
                                        asn1-ViolationOrEncodingError,
                                        messageTypeNonexistent,
                                        messageNotCompatibleWithReceiverState,
                                        ie-ValueNotComprehended,
                                        informationElementMissing,
                                        messageExtensionNotComprehended,
                                        spare2, sparel }

ProtocolErrorIndicator ::=          ENUMERATED {
                                        noError, errorOccurred }

ProtocolErrorIndicatorWithMoreInfo ::=
                                    CHOICE {
    noError                             NULL,
    errorOccurred                       SEQUENCE {
        rrc-TransactionIdentifier           RRC-TransactionIdentifier,
        protocolErrorInformation            ProtocolErrorInformation
    }
}
```

```
ProtocolErrorMoreInformation ::=    SEQUENCE {
    diagnosticsType                     CHOICE {
        type1                               CHOICE {
            asn1-ViolationOrEncodingError       NULL,
            messageTypeNonexistent              NULL,
            messageNotCompatibleWithReceiverState
                                                IdentificationOfReceivedMessage,
            ie-ValueNotComprehended             IdentificationOfReceivedMessage,
            conditionalInformationElementError  IdentificationOfReceivedMessage,
            messageExtensionNotComprehended     IdentificationOfReceivedMessage,
            spare1                              NULL,
            spare2                              NULL
        },
        spare                               NULL
    }
}

RadioFrequencyBandFDD ::=           ENUMERATED {
    -- fdd2100, fdd1900, fdd1800 correspond to Band I, Band II and Band III respectively
                                        fdd2100,
                                        fdd1900,
                                        fdd1800,
                                        bandVI,
                                        bandIV,
                                        bandV,
                                        bandVII,
                                        extension-indicator }

RadioFrequencyBandFDD2 ::=          ENUMERATED {
                                        bandVIII,
                                        bandIX,
                                        bandX,
                                        bandXI,
                                        bandXII,
                                        bandXIII,
                                        bandXIV,
                                        bandXV,
                                        bandXVI,
                                        bandXVII,
                                        bandXVIII,
                                        bandXIX,
                                        bandXX,
                                        bandXXI,
                                        bandXXII,
                                        extension-indicator }

RadioFrequencyBandTDDList ::=       ENUMERATED {
                                        a, b, c, ab, ac, bc, abc, spare }

RadioFrequencyBandTDDList-r7 ::=    ENUMERATED {
                                        a, b, c, d, ab, ac, ad, bc, bd, cd, abc, abd, acd, bcd,
                                        abcd, spare }

RadioFrequencyBandTDD ::=           ENUMERATED {
                                        a, b, c, d }

RadioFrequencyBandGSM ::=           ENUMERATED {
                                        gsm450,
                                        gsm480,
                                        gsm850,
                                        gsm900P,
                                        gsm900E,
                                        gsm1800,
                                        gsm1900,
                                        spare9, spare8, spare7, spare6, spare5,
                                        spare4, spare3, spare2, spare1}

Rb-timer-indicator ::=              SEQUENCE {
    t314-expired                        BOOLEAN,
    t315-expired                        BOOLEAN }

Re-EstablishmentTimer ::=           ENUMERATED {
                                        useT314, useT315
}

RedirectionInfo ::=                 CHOICE {
    frequencyInfo                       FrequencyInfo,
    interRATInfo                        InterRATInfo
```

```
}

RedirectionInfo-r6 ::=              CHOICE {
    frequencyInfo                       FrequencyInfo,
    interRATInfo                        InterRATInfo-r6
}

RejectionCause ::=                  ENUMERATED {
                                        congestion,
                                        unspecified }

ReleaseCause ::=                    ENUMERATED {
                                        normalEvent,
                                        unspecified,
                                        pre-emptiveRelease,
                                        congestion,
                                        re-establishmentReject,
                                        directedsignallingconnectionre-establishment,
                                        userInactivity,
                                        spare }

RF-Capability ::=                   SEQUENCE {
        fddRF-Capability                SEQUENCE {
            ue-PowerClass                   UE-PowerClass,
            txRxFrequencySeparation         TxRxFrequencySeparation
        }                                   OPTIONAL,
        tddRF-Capability                            SEQUENCE {
            ue-PowerClass               UE-PowerClass,
            radioFrequencyTDDBandList   RadioFrequencyBandTDDList,
            chipRateCapability          ChipRateCapability
        }                                   OPTIONAL
}

RF-Capability-r4-ext ::=            SEQUENCE {
        tddRF-Capability                            SEQUENCE {
            ue-PowerClass               UE-PowerClass,
            radioFrequencyBandTDDList   RadioFrequencyBandTDDList,
            chipRateCapability          ChipRateCapability
        }                                   OPTIONAL
}

RF-Capability-r7 ::=                SEQUENCE {
        fddRF-Capability                SEQUENCE {
            ue-PowerClass                   UE-PowerClass,
            txRxFrequencySeparation         TxRxFrequencySeparation
        }                                   OPTIONAL,
        tddRF-Capability                SEQUENCE {
            ue-PowerClass                   UE-PowerClass,
            radioFrequencyTDDBandList       RadioFrequencyBandTDDList-r7,
            chipRateCapability              ChipRateCapability-r7
        }   OPTIONAL
}

RLC-Capability ::=                  SEQUENCE {
    -- If present, the "totalRLC-AM-BufferSize" in the IE "RLC-Capability-r5-ext" overrides the
    -- corresponding value in this IE. The value in this IE may be used by a pre-REL-5 UTRAN.
    totalRLC-AM-BufferSize              TotalRLC-AM-BufferSize,
    maximumRLC-WindowSize               MaximumRLC-WindowSize,
    maximumAM-EntityNumber              MaximumAM-EntityNumberRLC-Cap
}

RLC-Capability-r5-ext ::=               SEQUENCE {
    totalRLC-AM-BufferSize              TotalRLC-AM-BufferSize-r5-ext       OPTIONAL
}

RRC-ConnectionReleaseInformation ::=    CHOICE {
    noRelease                           NULL,
    release                             SEQUENCE {
        releaseCause                        ReleaseCause
    }
}

RRC-MessageSequenceNumber ::=       INTEGER (0..15)


RRC-MessageSequenceNumberList ::=   SEQUENCE (SIZE (4..5)) OF
                                        RRC-MessageSequenceNumber
```

```
RRC-StateIndicator ::=              ENUMERATED {
                                        cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::=       INTEGER (0..3)

S-RNTI ::=                          BIT STRING (SIZE (20))

S-RNTI-2 ::=                        BIT STRING (SIZE (10))

SecurityCapability ::=              SEQUENCE {
    cipheringAlgorithmCap               BIT STRING {
                                        -- For each bit value "0" means false/ not supported
                                            spare15(0),
                                            spare14(1),
                                            spare13(2),
                                            spare12(3),
                                            spare11(4),
                                            spare10(5),
                                            spare9(6),
                                            spare8(7),
                                            spare7(8),
                                            spare6(9),
                                            spare5(10),
                                            spare4(11),
                                            spare3(12),
                                            uea2(13),
                                            uea1(14),
                                            uea0(15)
                                            }   (SIZE (16)),
    integrityProtectionAlgorithmCap     BIT STRING {
                                        -- For each bit value "0" means false/ not supported
                                            spare15(0),
                                            spare14(1),
                                            spare13(2),
                                            spare12(3),
                                            spare11(4),
                                            spare10(5),
                                            spare9(6),
                                            spare8(7),
                                            spare7(8),
                                            spare6(9),
                                            spare5(10),
                                            spare4(11),
                                            spare3(12),
                                            uia2(13),
                                            uia1(14),
                                            spare0(15)
                                            }    (SIZE (16))
}

Serving-HSDSCH-CellInformation ::=      SEQUENCE {
    deltaACK                        DeltaACK                    OPTIONAL,
    deltaNACK                       DeltaNACK                   OPTIONAL,
    harq-Preamble-Mode              HARQ-Preamble-Mode,
    primaryCPICH-Info               PrimaryCPICH-Info           OPTIONAL,
    dl-hspdsch-Information          DL-HSPDSCH-Information      OPTIONAL,
    harqInfo                        HARQ-Info                   OPTIONAL,
    mac-hsResetIndicator            ENUMERATED { true }         OPTIONAL
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported                        NULL,
    supported                           SEQUENCE {
        maxNoSCCPCH-RL                      MaxNoSCCPCH-RL,
        -- simultaneousSCCPCH-DPCH-DPDCH-Reception is applicable only if
        -- the IE Support of PDSCH = TRUE
        -- Note: the reference to DPDCH in the element name below is incorrect (see tabular). The
        -- name is not changed, to keep it aligned with R99.
        simultaneousSCCPCH-DPCH-DPDCH-Reception     BOOLEAN
    }
}

SRNC-Identity ::=                   BIT STRING (SIZE (12))


START-Value ::=                     BIT STRING (SIZE (20))

STARTList ::=                       SEQUENCE (SIZE (1..maxCNdomains)) OF
```

```
                                    STARTSingle

STARTSingle ::=                     SEQUENCE {
    cn-DomainIdentity                   CN-DomainIdentity,
    start-Value                         START-Value
}

CapabilityUpdateRequirement-r5 ::=  SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD  BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD384   BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD128   BOOLEAN,
    systemSpecificCapUpdateReqList      SystemSpecificCapUpdateReqList-r5       OPTIONAL
}

SystemSpecificCapUpdateReq ::=      ENUMERATED {
                                    gsm }

SystemSpecificCapUpdateReq-v590ext ::=      ENUMERATED {
                                    geranIu }

SystemSpecificCapUpdateReq-r5 ::=       ENUMERATED {
                                    gsm, geranIu }

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
                                    SystemSpecificCapUpdateReq

SystemSpecificCapUpdateReqList-r5 ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
                                    SystemSpecificCapUpdateReq-r5

T-300 ::=                           ENUMERATED {
                                    ms100, ms200, ms400, ms600, ms800,
                                    ms1000, ms1200, ms1400, ms1600,
                                    ms1800, ms2000, ms3000, ms4000,
                                    ms6000, ms8000 }

T-301 ::=                           ENUMERATED {
                                    ms100, ms200, ms400, ms600, ms800,
                                    ms1000, ms1200, ms1400, ms1600,
                                    ms1800, ms2000, ms3000, ms4000,
                                    ms6000, ms8000, spare }

T-302 ::=                           ENUMERATED {
                                    ms100, ms200, ms400, ms600, ms800,
                                    ms1000, ms1200, ms1400, ms1600,
                                    ms1800, ms2000, ms3000, ms4000,
                                    ms6000, ms8000, spare }

T-304 ::=                           ENUMERATED {
                                    ms100, ms200, ms400,
                                    ms1000, ms2000, spare3, spare2, spare1 }

T-305 ::=                           ENUMERATED {
                                    noUpdate, m5, m10, m30,
                                    m60, m120, m360, m720 }

T-307 ::=                           ENUMERATED {
                                    s5, s10, s15, s20,
                                    s30, s40, s50, spare }

T-308 ::=                           ENUMERATED {
                                    ms40, ms80, ms160, ms320 }

T-309 ::=                           INTEGER (1..8)

T-310 ::=                           ENUMERATED {
                                    ms40, ms80, ms120, ms160,
                                    ms200, ms240, ms280, ms320 }

T-311 ::=                           ENUMERATED {
                                    ms250, ms500, ms750, ms1000,
                                    ms1250, ms1500, ms1750, ms2000 }

-- The value 0 for T-312 is not used in this version of the specification
T-312 ::=                           INTEGER (0..15)

T-313 ::=                           INTEGER (0..15)

T-314 ::=                           ENUMERATED {
```

```
                                    s0, s2, s4, s6, s8,
                                    s12, s16, s20 }

T-315 ::=                           ENUMERATED {
                                    s0, s10, s30, s60, s180,
                                    s600, s1200, s1800 }

T-316 ::=                           ENUMERATED {
                                    s0, s10, s20, s30, s40,
                                    s50, s-inf, spare }

-- All the values are changed to "infinity" in Rel-5
T-317 ::=                           ENUMERATED {
                                    infinity0,  infinity1,  infinity2, infinity3, infinity4,
                                    infinity5, infinity6, infinity7}

T-318 ::=                           ENUMERATED {
                                    ms250, ms500, ms750, ms1000, ms1250, ms1500,
                                    ms1750, ms2000, ms3000, ms4000, ms6000, ms8000,
                                    ms10000, ms12000, ms16000 }

T-CPCH ::=                          ENUMERATED {
                                    ct0, ct1 }

TMSI-and-LAI-GSM-MAP ::=            SEQUENCE {
    tmsi                            TMSI-GSM-MAP,
    lai                             LAI
}

TMSI-DS-41 ::=                      OCTET STRING (SIZE (2..17))

TotalRLC-AM-BufferSize ::=          ENUMERATED {
                                    dummy, kb10, kb50, kb100,
                                    kb150, kb500, kb1000, spare }

TotalRLC-AM-BufferSize-r5-ext ::=   ENUMERATED {
                                    kb200, kb300, kb400, kb750 }

-- Actual value TransmissionProbability = IE value * 0.125
TransmissionProbability ::=         INTEGER (1..8)

TransportChannelCapability ::=      SEQUENCE {
    dl-TransChCapability            DL-TransChCapability,
    ul-TransChCapability            UL-TransChCapability
}

TurboSupport ::=                    CHOICE {
    notSupported                    NULL,
    supported                       MaxNoBits
}

-- Values defined as spare shall not be sent in this version of the protocol. If a spare value is
-- received, it should be interpreted as 'default-RxTX-sparation'.
TxRxFrequencySeparation ::=         ENUMERATED {
                                    default-TxRx-separation, spare2, spare1 }

U-RNTI ::=                          SEQUENCE {
    srnc-Identity                   SRNC-Identity,
    s-RNTI                          S-RNTI
}

U-RNTI-Group ::=                    CHOICE {
-- TABULAR: not following the tabular strictly, but this will most likely save bits
    all                             NULL,
    u-RNTI-BitMaskIndex-b1          BIT STRING (SIZE (31)),
    u-RNTI-BitMaskIndex-b2          BIT STRING (SIZE (30)),
    u-RNTI-BitMaskIndex-b3          BIT STRING (SIZE (29)),
    u-RNTI-BitMaskIndex-b4          BIT STRING (SIZE (28)),
    u-RNTI-BitMaskIndex-b5          BIT STRING (SIZE (27)),
    u-RNTI-BitMaskIndex-b6          BIT STRING (SIZE (26)),
    u-RNTI-BitMaskIndex-b7          BIT STRING (SIZE (25)),
    u-RNTI-BitMaskIndex-b8          BIT STRING (SIZE (24)),
    u-RNTI-BitMaskIndex-b9          BIT STRING (SIZE (23)),
    u-RNTI-BitMaskIndex-b10         BIT STRING (SIZE (22)),
    u-RNTI-BitMaskIndex-b11         BIT STRING (SIZE (21)),
    u-RNTI-BitMaskIndex-b12         BIT STRING (SIZE (20)),
    u-RNTI-BitMaskIndex-b13         BIT STRING (SIZE (19)),
    u-RNTI-BitMaskIndex-b14         BIT STRING (SIZE (18)),
```

```
    u-RNTI-BitMaskIndex-b15             BIT STRING (SIZE (17)),
    u-RNTI-BitMaskIndex-b16             BIT STRING (SIZE (16)),
    u-RNTI-BitMaskIndex-b17             BIT STRING (SIZE (15)),
    u-RNTI-BitMaskIndex-b18             BIT STRING (SIZE (14)),
    u-RNTI-BitMaskIndex-b19             BIT STRING (SIZE (13)),
    u-RNTI-BitMaskIndex-b20             BIT STRING (SIZE (12)),
    u-RNTI-BitMaskIndex-b21             BIT STRING (SIZE (11)),
    u-RNTI-BitMaskIndex-b22             BIT STRING (SIZE (10)),
    u-RNTI-BitMaskIndex-b23             BIT STRING (SIZE (9)),
    u-RNTI-BitMaskIndex-b24             BIT STRING (SIZE (8)),
    u-RNTI-BitMaskIndex-b25             BIT STRING (SIZE (7)),
    u-RNTI-BitMaskIndex-b26             BIT STRING (SIZE (6)),
    u-RNTI-BitMaskIndex-b27             BIT STRING (SIZE (5)),
    u-RNTI-BitMaskIndex-b28             BIT STRING (SIZE (4)),
    u-RNTI-BitMaskIndex-b29             BIT STRING (SIZE (3)),
    u-RNTI-BitMaskIndex-b30             BIT STRING (SIZE (2)),
    u-RNTI-BitMaskIndex-b31             BIT STRING (SIZE (1))
}

U-RNTI-Short ::=                    SEQUENCE {
    srnc-Identity                       SRNC-Identity,
    s-RNTI-2                            S-RNTI-2
}

UE-CapabilityContainer-IEs ::=          SEQUENCE {
-- Container for transparent transfer of capability information not related to
-- features for which early implementation is desired
        ue-RadioAccessCapability-v690ext    UE-RadioAccessCapability-v690ext,
        ue-RATSpecificCapability-v690ext    InterRAT-UE-RadioAccessCapability-v690ext   OPTIONAL,
        v6b0NonCriticalExtensions           SEQUENCE {
            ue-RadioAccessCapability-v6b0ext    UE-RadioAccessCapability-v6b0ext-IEs,
            nonCriticalExtensions               SEQUENCE {}     OPTIONAL
        }       OPTIONAL
}

UE-RadioAccessCapability-v6b0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        supportForSIB11bis                  ENUMERATED { true }         OPTIONAL
}

UE-ConnTimersAndConstants ::=       SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
-- t-301 and n-301 should not be used by the UE in this version of the specification
    t-301                               T-301                                   DEFAULT ms2000,
    n-301                               N-301                                   DEFAULT 2,
    t-302                               T-302                                   DEFAULT ms4000,
    n-302                               N-302                                   DEFAULT 3,
    t-304                               T-304                                   DEFAULT ms2000,
    n-304                               N-304                                   DEFAULT 2,
    t-305                               T-305                                   DEFAULT m30,
    t-307                               T-307                                   DEFAULT s30,
    t-308                               T-308                                   DEFAULT ms160,
    t-309                               T-309                                   DEFAULT 5,
    t-310                               T-310                                   DEFAULT ms160,
    n-310                               N-310                                   DEFAULT 4,
    t-311                               T-311                                   DEFAULT ms2000,
    t-312                               T-312                                   DEFAULT 1,
    -- n-312 shall be ignored if n-312 in UE-ConnTimersAndConstants-v3a0ext is present, and the
    -- value of that element shall be used instead.
    n-312                               N-312                                   DEFAULT s1,
    t-313                               T-313                                   DEFAULT 3,
    n-313                               N-313                                   DEFAULT s20,
    t-314                               T-314                                   DEFAULT s12,
    t-315                               T-315                                   DEFAULT s180,
    -- n-315 shall be ignored if n-315 in UE-ConnTimersAndConstants-v3a0ext is present, and the
    -- value of that element shall be used instead.
    n-315                               N-315                                   DEFAULT s1,
    t-316                               T-316                                   DEFAULT s30,
    t-317                               T-317                                   DEFAULT infinity4
}

UE-ConnTimersAndConstants-v3a0ext ::=       SEQUENCE {
    n-312                               N-312ext                                    OPTIONAL,
    n-315                               N-315ext                                    OPTIONAL
}

UE-ConnTimersAndConstants-r5 ::=        SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
```

```
-- t-301 and n-301 should not be used by the UE in this version of the specification
    t-301                               T-301                               DEFAULT ms2000,
    n-301                               N-301                               DEFAULT 2,
    t-302                               T-302                               DEFAULT ms4000,
    n-302                               N-302                               DEFAULT 3,
    t-304                               T-304                               DEFAULT ms2000,
    n-304                               N-304                               DEFAULT 2,
    t-305                               T-305                               DEFAULT m30,
    t-307                               T-307                               DEFAULT s30,
    t-308                               T-308                               DEFAULT ms160,
    t-309                               T-309                               DEFAULT 5,
    t-310                               T-310                               DEFAULT ms160,
    n-310                               N-310                               DEFAULT 4,
    t-311                               T-311                               DEFAULT ms2000,
    t-312                               T-312                               DEFAULT 1,
    n-312                               N-312-r5                            DEFAULT s1,
    t-313                               T-313                               DEFAULT 3,
    n-313                               N-313                               DEFAULT s20,
    t-314                               T-314                               DEFAULT s12,
    t-315                               T-315                               DEFAULT s180,
    n-315                               N-315-r5                            DEFAULT s1,
    t-316                               T-316                               DEFAULT s30,
    t-317                               T-317                               DEFAULT infinity4
}

UE-IdleTimersAndConstants ::=       SEQUENCE {
    t-300                               T-300,
    n-300                               N-300,
    t-312                               T-312,
    -- n-312 shall be ignored if n-312 in UE-IdleTimersAndConstants-v3a0ext is present, and the
    -- value of that element shall be used instead.
    n-312                               N-312
}

UE-HSPA-Identities-r6 ::= SEQUENCE {
    new-H-RNTI                      H-RNTI                              OPTIONAL,
    newPrimary-E-RNTI               E-RNTI                              OPTIONAL,
    newSecondary-E-RNTI             E-RNTI                              OPTIONAL
}

UE-IdleTimersAndConstants-v3a0ext ::=       SEQUENCE {
    n-312                               N-312ext                                OPTIONAL
}

UE-MultiModeRAT-Capability ::=      SEQUENCE {
    multiRAT-CapabilityList             MultiRAT-Capability,
    multiModeCapability                 MultiModeCapability
}

UE-PowerClass ::=                   INTEGER (1..4)

UE-PowerClassExt ::=                ENUMERATED {class1, class2, class3, class4,
                                         spare4, spare3, spare2, spare1 }

UE-RadioAccessCapability ::=        SEQUENCE {
    -- UE-RadioAccessCapability is compatible with R99, although accessStratumReleaseIndicator
    -- is removed from this IE, since its encoding did not does in bits. The
    -- accessStratumReleaseIndicator is provided in the relevant REL-4 extension IEs.
    pdcp-Capability                     PDCP-Capability,
    rlc-Capability                      RLC-Capability,
    transportChannelCapability          TransportChannelCapability,
    rf-Capability                       RF-Capability,
    physicalChannelCapability           PhysicalChannelCapability,
    ue-MultiModeRAT-Capability          UE-MultiModeRAT-Capability,
    securityCapability                  SecurityCapability,
    ue-positioning-Capability           UE-Positioning-Capability,
    measurementCapability               MeasurementCapability       OPTIONAL
}

UE-RadioAccessCapabilityInfo ::=        SEQUENCE {
    ue-RadioAccessCapability            UE-RadioAccessCapability,
    ue-RadioAccessCapability-v370ext    UE-RadioAccessCapability-v370ext
}

UE-RadioAccessCapability-v370ext ::=    SEQUENCE {
    ue-RadioAccessCapabBandFDDList      UE-RadioAccessCapabBandFDDList
}
```

```
UE-RadioAccessCapability-v380ext ::=    SEQUENCE {
    ue-PositioningCapabilityExt-v380        UE-PositioningCapabilityExt-v380
}

UE-RadioAccessCapability-v3a0ext ::=    SEQUENCE {
    ue-PositioningCapabilityExt-v3a0        UE-PositioningCapabilityExt-v3a0
}

UE-RadioAccessCapability-v3g0ext ::=    SEQUENCE {
    ue-PositioningCapabilityExt-v3g0        UE-PositioningCapabilityExt-v3g0
}

UE-RadioAccessCapability-v650ext ::=    SEQUENCE {
    ue-RadioAccessCapabBandFDDList2     UE-RadioAccessCapabBandFDDList2,
    -- This IE shall be included if the UE also supports Band I-VII
    ue-RadioAccessCapabBandFDDList-ext  UE-RadioAccessCapabBandFDDList-ext  OPTIONAL
}

UE-RadioAccessCapability-v690ext ::= SEQUENCE {
        physicalchannelcapability-edch  PhysicalChannelCapability-edch-r6,
        -- TABULAR: deviceType is MD in tabular description
        -- Default value is 'doesBenefitFromBatteryConsumptionOptimisation'
        deviceType      ENUMERATED { doesNotBenefitFromBatteryConsumptionOptimisation } OPTIONAL
}

UE-RadioAccessCapability-v7xyext ::=        SEQUENCE {
    rf-Capability                               RF-Capability-r7                OPTIONAL,
    physicalChannelCapability-r7                PhysicalChannelCapability-r7    OPTIONAL,
    physicalchannelcapability-tddedch           PhysicalChannelCapability-tddedch-r7    OPTIONAL
}

UE-RadioAccessCapabBandFDDList2 ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                        UE-RadioAccessCapabBandFDD2

UE-RadioAccessCapabBandFDD2 ::= SEQUENCE {
    radioFrequencyBandFDD2              RadioFrequencyBandFDD2,
    fddRF-Capability                    SEQUENCE {
        ue-PowerClass                       UE-PowerClassExt,
        txRxFrequencySeparation             TxRxFrequencySeparation
    }       OPTIONAL,
    measurementCapability2              MeasurementCapabilityExt2
}


UE-PositioningCapabilityExt-v380 ::=    SEQUENCE {
    rx-tx-TimeDifferenceType2Capable        BOOLEAN
}

UE-PositioningCapabilityExt-v3a0 ::=    SEQUENCE {
    validity-CellPCH-UraPCH                 ENUMERATED { true }
}

UE-PositioningCapabilityExt-v3g0 ::=    SEQUENCE {
    sfn-sfnType2Capability              ENUMERATED { true }
}

UE-RadioAccessCapabBandFDDList ::=  SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                        UE-RadioAccessCapabBandFDD

UE-RadioAccessCapabBandFDDList-ext ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                        UE-RadioAccessCapabBandFDD-ext

UE-RadioAccessCapabBandFDD ::=  SEQUENCE{
    radioFrequencyBandFDD               RadioFrequencyBandFDD,
    fddRF-Capability                    SEQUENCE {
        ue-PowerClass                       UE-PowerClassExt,
        txRxFrequencySeparation             TxRxFrequencySeparation
    }                                                           OPTIONAL,
    measurementCapability               MeasurementCapabilityExt
}

UE-RadioAccessCapabBandFDD-ext ::= SEQUENCE {
    radioFrequencyBandFDD               RadioFrequencyBandFDD,
    compressedModeMeasCapabFDDList-ext  CompressedModeMeasCapabFDDList-ext
}

UE-RadioAccessCapability-v4b0ext ::=    SEQUENCE {
    pdcp-Capability-r4-ext              PDCP-Capability-r4-ext,
```

```
    tdd-CapabilityExt                   SEQUENCE {
        rf-Capability                       RF-Capability-r4-ext,
        physicalChannelCapability-LCR       PhysicalChannelCapability-LCR-r4,
        measurementCapability-r4-ext        MeasurementCapability-r4-ext
    }                                           OPTIONAL,
    -- IE " AccessStratumReleaseIndicator" is not needed in RRC CONNECTION SETUP COMPLETE
    accessStratumReleaseIndicator               AccessStratumReleaseIndicator   OPTIONAL
}

UE-RadioAccessCapabilityComp ::= SEQUENCE {
    totalAM-RLCMemoryExceeds10kB            BOOLEAN,
    rf-CapabilityComp                       RF-CapabilityComp
}

UE-RadioAccessCapabilityComp-ext ::= SEQUENCE {
    rf-CapabilityFDDComp                RF-CapabBandListFDDComp-ext
}

UE-RadioAccessCapabilityComp-r7 ::= SEQUENCE {
    totalAM-RLCMemoryExceeds10kB            BOOLEAN,
    rf-CapabilityComp                       RF-CapabilityComp-r7
}

UE-RadioAccessCapabilityComp2 ::=       SEQUENCE {
    fddPhysicalChannelCapab-hspdsch-edch    SEQUENCE {
        dl-CapabilityWithSimultaneousHS-DSCHConfig
                                                DL-CapabilityWithSimultaneousHS-DSCHConfig
    OPTIONAL,
        physicalChannelCapabComp-hspdsch-r6     HSDSCH-physical-layer-category,
        physicalChannelCapability-edch-r6       PhysicalChannelCapability-edch-r6
    }       OPTIONAL
}

RF-CapabilityComp ::= SEQUENCE {
    fdd                     CHOICE {
        notSupported                    NULL,
        supported                       RF-CapabBandListFDDComp
    },
    tdd384-RF-Capability    CHOICE {
        notSupported                    NULL,
        supported                       RadioFrequencyBandTDDList
    },
    tdd128-RF-Capability    CHOICE {
        notSupported                    NULL,
        supported                       RadioFrequencyBandTDDList
    }
}

RF-CapabilityComp-r7 ::= SEQUENCE {
    fdd                     CHOICE {
        notSupported                    NULL,
        supported                       RF-CapabBandListFDDComp
    },
    tdd384-RF-Capability    CHOICE {
        notSupported                    NULL,
        supported                       RadioFrequencyBandTDDList-r7
    },
    tdd768-RF-Capability    CHOICE  {
        notSupported                    NULL,
        supported                       RadioFrequencyBandTDDList-r7
    },
    tdd128-RF-Capability    CHOICE {
        notSupported                    NULL,
        supported                       RadioFrequencyBandTDDList-r7
    }
}

-- NOTE: This IE defines the supported TX/RX frequency separation for the respective supported
-- frequency band. Values defined as spare shall not be sent in this version of the protocol.
-- If a spare value is received, it should be interpreted as 'default-RxTX-sparation'.
RF-CapabBandFDDComp ::=             ENUMERATED { notSupported,
                                        default-TxRx-separation, spare2, spare1 }

RF-CapabBandListFDDComp ::=         SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
    -- The first entry corresponds with the first value of IE RadioFrequencyBandFDD,
    -- fdd2100, and so on. No more than seven entries should be included in this IE. The
    -- 8'th entry, if present, shall be ignored.
    -- An extension of this IE may be provided using the IE 'RF-CapabBandListFDDComp-ext'.
```

```
    RF-CapabBandFDDComp

RF-CapabBandListFDDComp-ext ::=     SEQUENCE (SIZE (1..maxFreqBandsFDD-ext)) OF
    -- The first entry corresponds with the first value of IE RadioFrequencyBandFDD2,
    -- bandVIII, and so on.
    RF-CapabBandFDDComp

UE-RadioAccessCapability-v590ext ::=    SEQUENCE {
    dl-CapabilityWithSimultaneousHS-DSCHConfig  DL-CapabilityWithSimultaneousHS-DSCHConfig
    OPTIONAL,
    pdcp-Capability-r5-ext              PDCP-Capability-r5-ext,
    rlc-Capability-r5-ext               RLC-Capability-r5-ext,
    physicalChannelCapability           PhysicalChannelCapability-hspdsch-r5,
    multiModeRAT-Capability-v590ext     MultiModeRAT-Capability-v590ext
}

UE-RadioAccessCapability-v5c0ext ::= SEQUENCE {
    pdcp-Capability-r5-ext2             PDCP-Capability-r5-ext2
}

UE-RadioAccessCapability-v680ext ::= SEQUENCE {
    multiModeRAT-Capability-v680ext     MultiModeRAT-Capability-v680ext
}

UL-PhysChCapabilityFDD ::=          SEQUENCE {
    maxNoDPDCH-BitsTransmitted          MaxNoDPDCH-BitsTransmitted,
    -- dummy is not used in this version of the specification and
    -- it should be ignored by the receiver.
    dummy                               BOOLEAN
}

UL-PhysChCapabilityFDD-r6 ::=           SEQUENCE {
    maxNoDPDCH-BitsTransmitted              MaxNoDPDCH-BitsTransmitted,
    physicalchannelcapability-edch          PhysicalChannelCapability-edch-r6
}

UL-PhysChCapabilityTDD ::=          SEQUENCE {
    maxTS-PerFrame                      MaxTS-PerFrame,
    maxPhysChPerTimeslot                MaxPhysChPerTimeslot,
    minimumSF                           MinimumSF-UL,
    supportOfPUSCH                      BOOLEAN
}

UL-PhysChCapabilityTDD-LCR-r4 ::=   SEQUENCE {
    maxTS-PerSubFrame                   MaxTS-PerSubFrame-r4,
    maxPhysChPerTimeslot                MaxPhysChPerTimeslot,
    minimumSF                           MinimumSF-UL,
    supportOfPUSCH                      BOOLEAN,
    supportOf8PSK                       BOOLEAN
}

PhysicalChannelCapability-edch-r6 ::=   SEQUENCE {
    fdd-edch                                CHOICE {
        supported                               SEQUENCE {
            edch-PhysicalLayerCategory              INTEGER (1..16)
        },
        unsupported                             NULL
    }
}


PhysicalChannelCapability-tddedch-r7 ::=    SEQUENCE {
    tdd-edch                                CHOICE {
        supported                               SEQUENCE {
            tdd-edch-PhysicalLayerCategory          INTEGER (1..16)
        },
        unsupported                             NULL
    }
}

UL-TransChCapability ::=            SEQUENCE {
    maxNoBitsTransmitted                MaxNoBits,
    maxConvCodeBitsTransmitted          MaxNoBits,
    turboEncodingSupport                TurboSupport,
    maxSimultaneousTransChs             MaxSimultaneousTransChsUL,
    modeSpecificInfo                    CHOICE {
        fdd                                 NULL,
        tdd                                 SEQUENCE {
```

```
            maxSimultaneousCCTrCH-Count         MaxSimultaneousCCTrCH-Count
        }
    },
    maxTransmittedBlocks                MaxTransportBlocksUL,
    maxNumberOfTFC                      MaxNumberOfTFC-UL,
    maxNumberOfTF                       MaxNumberOfTF
}

UE-Positioning-Capability ::=       SEQUENCE {
    standaloneLocMethodsSupported           BOOLEAN,
    ue-BasedOTDOA-Supported                 BOOLEAN,
    networkAssistedGPS-Supported            NetworkAssistedGPS-Supported,
    supportForUE-GPS-TimingOfCellFrames     BOOLEAN,
    supportForIPDL                          BOOLEAN
}

UE-SecurityInformation ::=          SEQUENCE {
    start-CS                            START-Value
}

UE-SecurityInformation2 ::=         SEQUENCE {
    start-PS                            START-Value
}

URA-UpdateCause ::=                 ENUMERATED {
                                        changeOfURA,
                                        periodicURAUpdate,
                                        dummy,
                                        spare1 }

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::=                        INTEGER (0..15)

-- **************************************************
--
--     RADIO BEARER INFORMATION ELEMENTS (10.3.4)
--
-- **************************************************

AlgorithmSpecificInfo ::=           CHOICE {
    rfc2507-Info                        RFC2507-Info
}

AlgorithmSpecificInfo-r4 ::=        CHOICE {
    rfc2507-Info                        RFC2507-Info,
    rfc3095-Info                        RFC3095-Info-r4
}

CID-InclusionInfo-r4 ::=            ENUMERATED {
                                        pdcp-Header,
                                        rfc3095-PacketFormat }

-- Upper limit of COUNT-C is 2^32 - 1
COUNT-C ::=                         INTEGER (0..4294967295)

-- Upper limit of COUNT-C-MSB is 2^25 - 1
COUNT-C-MSB ::=                     INTEGER (0..33554431)

DefaultConfigIdentity ::=           INTEGER (0..10)

DefaultConfigIdentity-r4 ::=        INTEGER (0..12)

DefaultConfigIdentity-r5 ::=        INTEGER (0..13)

-- DefaultConfigIdentity-r6 values 23..31 are spare and shall not be used in this version of
-- the protocol
DefaultConfigIdentity-r6 ::=        INTEGER (0..31)

DefaultConfigMode ::=               ENUMERATED {
                                        fdd,
                                        tdd }

DDI ::=                             INTEGER (0..62)

DL-AM-RLC-Mode ::=                  SEQUENCE {
    inSequenceDelivery                  BOOLEAN,
    receivingWindowSize                 ReceivingWindowSize,
```

```
    dl-RLC-StatusInfo                   DL-RLC-StatusInfo
}

DL-AM-RLC-Mode-r5 ::=                   SEQUENCE {
    dl-RLC-PDU-size                     OctetModeRLC-SizeInfoType1,
    inSequenceDelivery                  BOOLEAN,
    receivingWindowSize                 ReceivingWindowSize,
    dl-RLC-StatusInfo                   DL-RLC-StatusInfo
}

DL-CounterSynchronisationInfo ::=       SEQUENCE {
    rB-WithPDCP-InfoList                    RB-WithPDCP-InfoList    OPTIONAL
}

DL-CounterSynchronisationInfo-r5 ::=    SEQUENCE {
    rb-WithPDCP-InfoList                    RB-WithPDCP-InfoList            OPTIONAL,
    rb-PDCPContextRelocationList            RB-PDCPContextRelocationList    OPTIONAL
}

DL-LogicalChannelMapping ::=        SEQUENCE {
    -- TABULAR: DL-TransportChannelType contains TransportChannelIdentity as well.
    dl-TransportChannelType             DL-TransportChannelType,
    logicalChannelIdentity              LogicalChannelIdentity              OPTIONAL
}

DL-LogicalChannelMapping-r5 ::=     SEQUENCE {
    -- TABULAR: DL-TransportChannelType contains TransportChannelIdentity as well.
    dl-TransportChannelType             DL-TransportChannelType-r5,
    logicalChannelIdentity              LogicalChannelIdentity              OPTIONAL
}

DL-LogicalChannelMappingList ::=    SEQUENCE (SIZE (1..maxLoCHperRLC)) OF
                                        DL-LogicalChannelMapping

DL-LogicalChannelMappingList-r5 ::= SEQUENCE (SIZE (1..maxLoCHperRLC)) OF
                                        DL-LogicalChannelMapping-r5

DL-Reception-Window-Size-r6 ::=     ENUMERATED { size32, size48, size64, size80, size96, size112 }

DL-RFC3095-r4 ::=                   SEQUENCE {
    -- dummy is not used in this version of the specification and shall be ignored by the receiver.
    dummy                               CID-InclusionInfo-r4,
    max-CID                             INTEGER (1..16383)                  DEFAULT 15,
    reverseDecompressionDepth           INTEGER (0..65535)                  DEFAULT 0
}

DL-RLC-Mode ::=                     CHOICE {
    dl-AM-RLC-Mode                      DL-AM-RLC-Mode,
    dl-UM-RLC-Mode                      NULL,
    dl-TM-RLC-Mode                      DL-TM-RLC-Mode
}

DL-RLC-Mode-r5 ::=                  CHOICE {
    dl-AM-RLC-Mode                      DL-AM-RLC-Mode-r5,
    dl-UM-RLC-Mode                      DL-UM-RLC-Mode-r5,
    dl-TM-RLC-Mode                      DL-TM-RLC-Mode
}

DL-RLC-Mode-r6 ::=                  CHOICE {
    dl-AM-RLC-Mode                      DL-AM-RLC-Mode-r5,
    dl-UM-RLC-Mode                      DL-UM-RLC-Mode-r6,
    dl-TM-RLC-Mode                      DL-TM-RLC-Mode
}

DL-RLC-StatusInfo ::=               SEQUENCE {
    timerStatusProhibit                 TimerStatusProhibit                 OPTIONAL,
    -- dummy is not used in this version of the specification, it should not be sent
    -- and if received they should be ignored.
    dummy                           TimerEPC                            OPTIONAL,
    missingPDU-Indicator                BOOLEAN,
    timerStatusPeriodic                 TimerStatusPeriodic                 OPTIONAL
}

DL-TM-RLC-Mode ::=                  SEQUENCE {
    segmentationIndication              BOOLEAN
}

DL-TransportChannelType ::=         CHOICE {
```

```
    dch                                 TransportChannelIdentity,
    fach                                NULL,
    -- The choice "dsch" should not be used in FDD mode, and if received
    -- the UE behaviour is unspecified.
    dsch                                TransportChannelIdentity,
    -- The choice "dch-and-dsch" should not be used in FDD mode, and if received the UE
    -- behaviour is unspecified
    dch-and-dsch                        TransportChannelIdentityDCHandDSCH
}

DL-TransportChannelType-r5 ::=          CHOICE {
    dch                                 TransportChannelIdentity,
    fach                                NULL,
    -- The choice "dsch" should not be used in FDD mode, and if received
    -- the UE behaviour is unspecified.
    dsch                                TransportChannelIdentity,
    -- The choice "dch-and-dsch" should not be used in FDD mode, and if received the UE
    -- behaviour is unspecified
    dch-and-dsch                        TransportChannelIdentityDCHandDSCH,
    hsdsch                              MAC-d-FlowIdentity,
    dch-and-hsdsch                      MAC-d-FlowIdentityDCHandHSDSCH
}

DL-UM-RLC-LI-size ::=                   ENUMERATED {
                                        size7, size15 }

DL-UM-RLC-Mode-r5 ::=                   SEQUENCE {
    dl-UM-RLC-LI-size                   DL-UM-RLC-LI-size
}

DL-UM-RLC-Mode-r6 ::=               SEQUENCE {
    dl-UM-RLC-LI-size                   DL-UM-RLC-LI-size,
    dl-Reception-Window-Size            DL-Reception-Window-Size-r6         OPTIONAL
}

ExpectReordering ::=                ENUMERATED {
                                        reorderingNotExpected,
                                        reorderingExpected }

ExplicitDiscard ::=                 SEQUENCE {
    timerMRW                            TimerMRW,
    timerDiscard                        TimerDiscard,
    maxMRW                              MaxMRW
}

HeaderCompressionInfo ::=           SEQUENCE {
    algorithmSpecificInfo               AlgorithmSpecificInfo
}

HeaderCompressionInfoList ::=       SEQUENCE (SIZE (1..maxPDCPAlgoType)) OF
                                        HeaderCompressionInfo

HeaderCompressionInfo-r4 ::=        SEQUENCE {
    algorithmSpecificInfo               AlgorithmSpecificInfo-r4
}

HeaderCompressionInfoList-r4 ::=    SEQUENCE (SIZE (1..maxPDCPAlgoType)) OF
                                        HeaderCompressionInfo-r4

LogicalChannelIdentity ::=          INTEGER (1..15)

LosslessSRNS-RelocSupport ::=       CHOICE {
    supported                           MaxPDCP-SN-WindowSize,
    notSupported                        NULL
}

MAC-d-HFN-initial-value ::=         BIT STRING (SIZE (24))

MAC-LogicalChannelPriority ::=      INTEGER (1..8)

MaxDAT ::=                          ENUMERATED {
                                        dat1, dat2, dat3, dat4, dat5, dat6,
                                        dat7, dat8, dat9, dat10, dat15, dat20,
                                        dat25, dat30, dat35, dat40 }

MaxDAT-Retransmissions ::=          SEQUENCE {
    maxDAT                              MaxDAT,
    timerMRW                            TimerMRW,
```

```
    maxMRW                              MaxMRW
}

MaxMRW ::=                          ENUMERATED {
                                        mm1, mm4, mm6, mm8, mm12, mm16,
                                        mm24, mm32 }

MaxPDCP-SN-WindowSize ::=           ENUMERATED {
                                        sn255, sn65535 }

MaxRST ::=                          ENUMERATED {
                                        rst1, rst4, rst6, rst8, rst12,
                                        rst16, rst24, rst32 }

NoExplicitDiscard ::=               ENUMERATED {
                                        dt10, dt20, dt30, dt40, dt50,
                                        dt60, dt70, dt80, dt90, dt100 }

PDCP-Info ::=                       SEQUENCE {
    losslessSRNS-RelocSupport           LosslessSRNS-RelocSupport           OPTIONAL,
    -- TABULAR: pdcp-PDU-Header is MD in the tabular format and it can be encoded
    -- in one bit, so the OPTIONAL is removed for compactness.
    pdcp-PDU-Header                     PDCP-PDU-Header,
    headerCompressionInfoList           HeaderCompressionInfoList           OPTIONAL
}

PDCP-Info-r4 ::=                    SEQUENCE {
    losslessSRNS-RelocSupport           LosslessSRNS-RelocSupport           OPTIONAL,
    -- TABULAR: pdcp-PDU-Header is MD in the tabular format and it can be encoded
    -- in one bit, so the OPTIONAL is removed for compactness.
    pdcp-PDU-Header                     PDCP-PDU-Header,
    headerCompressionInfoList           HeaderCompressionInfoList-r4        OPTIONAL
}

PDCP-InfoReconfig ::=               SEQUENCE {
    pdcp-Info                           PDCP-Info,
    -- dummy is not used in this version of the specification and
    -- it should be ignored.
    dummy                               INTEGER (0..65535)
}

PDCP-InfoReconfig-r4 ::=            SEQUENCE {
    pdcp-Info                           PDCP-Info-r4
}

PDCP-PDU-Header ::=                 ENUMERATED {
                                        present, absent }

PDCP-ROHC-TargetMode ::=            ENUMERATED { o-Mode, r-Mode }

PDCP-SN-Info ::=                    INTEGER (0..65535)

Poll-PDU ::=                        ENUMERATED {
                                        pdu1, pdu2, pdu4, pdu8, pdu16,
                                        pdu32, pdu64, pdu128 }

Poll-SDU ::=                        ENUMERATED {
                                        sdu1, sdu4, sdu16, sdu64 }

PollingInfo ::=                     SEQUENCE {
    timerPollProhibit                   TimerPollProhibit                   OPTIONAL,
    timerPoll                           TimerPoll                           OPTIONAL,
    poll-PDU                            Poll-PDU                            OPTIONAL,
    poll-SDU                            Poll-SDU                            OPTIONAL,
    lastTransmissionPDU-Poll            BOOLEAN,
    lastRetransmissionPDU-Poll          BOOLEAN,
    pollWindow                          PollWindow                          OPTIONAL,
    timerPollPeriodic                   TimerPollPeriodic                   OPTIONAL
}

PollWindow ::=                      ENUMERATED {
                                        pw50, pw60, pw70, pw80, pw85,
                                        pw90, pw95, pw99 }

PredefinedConfigIdentity ::=        INTEGER (0..15)

PredefinedConfigValueTag ::=        INTEGER (0..15)
```

```
PredefinedRB-Configuration ::=      SEQUENCE {
    re-EstablishmentTimer               Re-EstablishmentTimer,
    srb-InformationList                 SRB-InformationSetupList,
    rb-InformationList                  RB-InformationSetupList
}

PreDefRadioConfiguration ::=        SEQUENCE {
    -- Radio bearer IEs
        predefinedRB-Configuration          PredefinedRB-Configuration,
    -- Transport channel IEs
        preDefTransChConfiguration          PreDefTransChConfiguration,
    -- Physical channel IEs
        preDefPhyChConfiguration            PreDefPhyChConfiguration
}

PredefinedConfigStatusList ::=              SEQUENCE (SIZE (maxPredefConfig)) OF
                                            PredefinedConfigStatusInfo

PredefinedConfigStatusInfo ::=      CHOICE {
    storedWithValueTagSameAsPrevius     NULL,
    other                               CHOICE {
        notStored                           NULL,
        storedWithDifferentValueTag         PredefinedConfigValueTag
    }
}

PredefinedConfigStatusListComp ::= SEQUENCE {
    setsWithDifferentValueTag           PredefinedConfigSetsWithDifferentValueTag,
    otherEntries                        PredefinedConfigStatusListVarSz             OPTIONAL
}

PredefinedConfigSetsWithDifferentValueTag ::= SEQUENCE (SIZE (1..2)) OF
                                            PredefinedConfigSetWithDifferentValueTag

PredefinedConfigSetWithDifferentValueTag ::= SEQUENCE {
    startPosition                           INTEGER (0..10)     DEFAULT 0,
    -- numberOfEntries                      INTEGER (6..16),
    -- numberOfEntries is covered by the size of the list in IE PredefinedConfigValueTagList
    valueTagList                            PredefinedConfigValueTagList
}


PredefinedConfigValueTagList ::=        SEQUENCE (SIZE (1..maxPredefConfig)) OF
                                            PredefinedConfigValueTag

PredefinedConfigStatusListVarSz ::=     SEQUENCE (SIZE (1..maxPredefConfig)) OF
                                            PredefinedConfigStatusInfo


RAB-Info ::=                        SEQUENCE {
    rab-Identity                        RAB-Identity,
    cn-DomainIdentity                   CN-DomainIdentity,
    nas-Synchronisation-Indicator       NAS-Synchronisation-Indicator   OPTIONAL,
    re-EstablishmentTimer               Re-EstablishmentTimer
}

RAB-Info-r6-ext ::=                 SEQUENCE {
    mbms-SessionIdentity                MBMS-SessionIdentity                OPTIONAL
}

RAB-Info-v6b0ext ::=                SEQUENCE {
    mbms-ServiceIdentity                OCTET STRING (SIZE (3))
}

RAB-Info-r6 ::=                     SEQUENCE {
    rab-Identity                        RAB-Identity,
    mbms-SessionIdentity                MBMS-SessionIdentity                OPTIONAL,
    cn-DomainIdentity                   CN-DomainIdentity,
    nas-Synchronisation-Indicator       NAS-Synchronisation-Indicator       OPTIONAL,
    re-EstablishmentTimer               Re-EstablishmentTimer
}

RAB-Info-r7 ::=                     SEQUENCE {
    rab-Identity                        RAB-Identity,
    mbms-SessionIdentity                MBMS-SessionIdentity                OPTIONAL,
    mbms-ServiceIdentity                OCTET STRING (SIZE (3))             OPTIONAL,
    cn-DomainIdentity                   CN-DomainIdentity,
    nas-Synchronisation-Indicator       NAS-Synchronisation-Indicator       OPTIONAL,
    re-EstablishmentTimer               Re-EstablishmentTimer
```

```
}

RAB-InformationList ::=             SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-Info

RAB-InformationList-r6 ::=          SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-Info-r6

RAB-InformationReconfigList ::=     SEQUENCE (SIZE (1.. maxRABsetup)) OF
                                        RAB-InformationReconfig

RAB-InformationReconfig ::=         SEQUENCE {
    rab-Identity                        RAB-Identity,
    cn-DomainIdentity                   CN-DomainIdentity,
    nas-Synchronisation-Indicator       NAS-Synchronisation-Indicator
}

RAB-Info-Post ::=                       SEQUENCE {
    rab-Identity                        RAB-Identity,
    cn-DomainIdentity                   CN-DomainIdentity,
    nas-Synchronisation-Indicator       NAS-Synchronisation-Indicator   OPTIONAL
}

RAB-InformationSetup ::=            SEQUENCE {
    rab-Info                            RAB-Info,
    rb-InformationSetupList             RB-InformationSetupList
}

RAB-InformationSetup-r4 ::=         SEQUENCE {
    rab-Info                            RAB-Info,
    rb-InformationSetupList             RB-InformationSetupList-r4
}

RAB-InformationSetup-r5 ::=         SEQUENCE {
    rab-Info                            RAB-Info,
    rb-InformationSetupList             RB-InformationSetupList-r5
}

RAB-InformationSetup-r6-ext ::=     SEQUENCE {
    rab-Info-r6-ext                     RAB-Info-r6-ext
}

RAB-InformationSetup-r6 ::=         SEQUENCE {
    rab-Info                            RAB-Info-r6,
    rb-InformationSetupList             RB-InformationSetupList-r6
}

RAB-InformationSetup-v6b0ext ::=    SEQUENCE {
    rab-Info-v6b0ext                    RAB-Info-v6b0ext            OPTIONAL
}

RAB-InformationSetup-r7 ::=         SEQUENCE {
    rab-Info                            RAB-Info-r7,
    rb-InformationSetupList             RB-InformationSetupList-r6
}

RAB-InformationSetupList ::=        SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-InformationSetup

RAB-InformationSetupList-r4 ::=     SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-InformationSetup-r4

RAB-InformationSetupList-r5 ::=     SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-InformationSetup-r5

RAB-InformationSetupList-r6 ::=     SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-InformationSetup-r6

-- The IE 'RAB-InformationSetupList-r6-ext' provides elements of extension information, which
-- are added to the corresponding elements of the IE 'RAB-InformationSetupList/-r4/-r5'.
RAB-InformationSetupList-r6-ext ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-InformationSetup-r6-ext

RAB-InformationSetupList-v6b0ext ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-InformationSetup-v6b0ext

RAB-InformationSetupList-r7 ::=     SEQUENCE (SIZE (1..maxRABsetup)) OF
                                        RAB-InformationSetup-r7
```

```
RB-ActivationTimeInfo ::=           SEQUENCE {
    rb-Identity                         RB-Identity,
    rlc-SequenceNumber                  RLC-SequenceNumber
}

RB-ActivationTimeInfoList ::=       SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-ActivationTimeInfo

RB-COUNT-C-Information ::=          SEQUENCE {
    rb-Identity                         RB-Identity,
    count-C-UL                          COUNT-C,
    count-C-DL                          COUNT-C
}

RB-COUNT-C-InformationList ::=      SEQUENCE (SIZE (1..maxRBallRABs)) OF
                                        RB-COUNT-C-Information

RB-COUNT-C-MSB-Information ::=      SEQUENCE {
    rb-Identity                         RB-Identity,
    count-C-MSB-UL                      COUNT-C-MSB,
    count-C-MSB-DL                      COUNT-C-MSB
}

RB-COUNT-C-MSB-InformationList ::=  SEQUENCE (SIZE (1..maxRBallRABs)) OF
                                        RB-COUNT-C-MSB-Information

RB-Identity ::=                     INTEGER (1..32)

RB-IdentityList ::=                 SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-Identity

RB-InformationAffected ::=          SEQUENCE {
    rb-Identity                         RB-Identity,
    rb-MappingInfo                      RB-MappingInfo
}

RB-InformationAffected-r5 ::=       SEQUENCE {
    rb-Identity                         RB-Identity,
    rb-MappingInfo                      RB-MappingInfo-r5
}

RB-InformationAffected-r6 ::=       SEQUENCE {
    rb-Identity                         RB-Identity,
    rb-MappingInfo                      RB-MappingInfo-r6
}

RB-InformationAffectedList ::=      SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-InformationAffected

RB-InformationAffectedList-r5 ::=   SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-InformationAffected-r5

RB-InformationAffectedList-r6 ::=   SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-InformationAffected-r6

RB-InformationChanged-r6 ::=        SEQUENCE {
    rb-Identity                         RB-Identity,
    rb-Change                           CHOICE {
        release                             NULL,
        re-mapToDefaultRb                   RB-Identity
    }
}

RB-InformationChangedList-r6 ::=        SEQUENCE (SIZE (1..maxRB)) OF
                                            RB-InformationChanged-r6

RB-InformationReconfig ::=          SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-Info                           PDCP-InfoReconfig                   OPTIONAL,
    pdcp-SN-Info                        PDCP-SN-Info                        OPTIONAL,
    rlc-Info                            RLC-Info                            OPTIONAL,
    rb-MappingInfo                      RB-MappingInfo                      OPTIONAL,
    rb-StopContinue                     RB-StopContinue                     OPTIONAL
}

RB-InformationReconfig-r4 ::=       SEQUENCE {
    rb-Identity                         RB-Identity,
```

```
    pdcp-Info                           PDCP-InfoReconfig-r4                OPTIONAL,
    pdcp-SN-Info                        PDCP-SN-Info                        OPTIONAL,
    rlc-Info                            RLC-Info                            OPTIONAL,
    rb-MappingInfo                      RB-MappingInfo                      OPTIONAL,
    rb-StopContinue                     RB-StopContinue                     OPTIONAL
}

RB-InformationReconfig-r5 ::=       SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-Info                           PDCP-InfoReconfig-r4                OPTIONAL,
    pdcp-SN-Info                        PDCP-SN-Info                        OPTIONAL,
    rlc-Info                            RLC-Info-r5                         OPTIONAL,
    rb-MappingInfo                      RB-MappingInfo-r5                   OPTIONAL,
    rb-StopContinue                     RB-StopContinue                     OPTIONAL
}

RB-InformationReconfig-r6 ::=       SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-Info                           PDCP-InfoReconfig-r4                OPTIONAL,
    pdcp-SN-Info                        PDCP-SN-Info                        OPTIONAL,
    rlc-Info                            RLC-Info-r6                         OPTIONAL,
    rb-MappingInfo                      RB-MappingInfo-r6                   OPTIONAL,
    rb-StopContinue                     RB-StopContinue                     OPTIONAL
}

RB-InformationReconfigList ::=      SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-InformationReconfig

RB-InformationReconfigList-r4 ::=   SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-InformationReconfig-r4

RB-InformationReconfigList-r5 ::=   SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-InformationReconfig-r5

RB-InformationReconfigList-r6 ::=   SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-InformationReconfig-r6

RB-InformationReleaseList ::=       SEQUENCE (SIZE (1..maxRB)) OF
                                        RB-Identity

RB-InformationSetup ::=             SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-Info                           PDCP-Info                           OPTIONAL,
    rlc-InfoChoice                      RLC-InfoChoice,
    rb-MappingInfo                      RB-MappingInfo
}

RB-InformationSetup-r4 ::=          SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-Info                           PDCP-Info-r4                        OPTIONAL,
    rlc-InfoChoice                      RLC-InfoChoice,
    rb-MappingInfo                      RB-MappingInfo
}

RB-InformationSetup-r5 ::=          SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-Info                           PDCP-Info-r4                        OPTIONAL,
    rlc-InfoChoice                      RLC-InfoChoice-r5,
    rb-MappingInfo                      RB-MappingInfo-r5
}

RB-InformationSetup-r6 ::=          SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-Info                           PDCP-Info-r4                        OPTIONAL,
    rlc-InfoChoice                      RLC-InfoChoice-r6,
    rb-MappingInfo                      RB-MappingInfo-r6
}

RB-InformationSetupList ::=         SEQUENCE (SIZE (1..maxRBperRAB)) OF
                                        RB-InformationSetup

RB-InformationSetupList-r4 ::=      SEQUENCE (SIZE (1..maxRBperRAB)) OF
                                        RB-InformationSetup-r4

RB-InformationSetupList-r5 ::=      SEQUENCE (SIZE (1..maxRBperRAB)) OF
                                        RB-InformationSetup-r5

RB-InformationSetupList-r6 ::=      SEQUENCE (SIZE (1..maxRBperRAB)) OF
```

```
                                    RB-InformationSetup-r6

RB-MappingInfo ::=                  SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
                                    RB-MappingOption

RB-MappingInfo-r5 ::=               SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
                                    RB-MappingOption-r5

RB-MappingInfo-r6 ::=               SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
                                    RB-MappingOption-r6

RB-MappingOption ::=                SEQUENCE {
    ul-LogicalChannelMappings           UL-LogicalChannelMappings           OPTIONAL,
    dl-LogicalChannelMappingList        DL-LogicalChannelMappingList        OPTIONAL
}

RB-MappingOption-r5 ::=             SEQUENCE {
    ul-LogicalChannelMappings           UL-LogicalChannelMappings           OPTIONAL,
    dl-LogicalChannelMappingList        DL-LogicalChannelMappingList-r5     OPTIONAL
}

RB-MappingOption-r6 ::=             SEQUENCE {
    ul-LogicalChannelMappings           UL-LogicalChannelMappings-r6        OPTIONAL,
    dl-LogicalChannelMappingList        DL-LogicalChannelMappingList-r5     OPTIONAL
}

RB-PDCPContextRelocation ::=            SEQUENCE {
    rb-Identity                             RB-Identity,
    dl-RFC3095-Context-Relocation           BOOLEAN,
    ul-RFC3095-Context-Relocation           BOOLEAN
}

RB-PDCPContextRelocationList ::=            SEQUENCE (SIZE (1..maxRBallRABs)) OF
                                            RB-PDCPContextRelocation

RB-StopContinue ::=                 ENUMERATED {
                                        stopRB, continueRB }

RB-WithPDCP-Info ::=                SEQUENCE {
    rb-Identity                         RB-Identity,
    pdcp-SN-Info                        PDCP-SN-Info
}

RB-WithPDCP-InfoList ::=            SEQUENCE (SIZE (1..maxRBallRABs)) OF
                                        RB-WithPDCP-Info

ReceivingWindowSize ::=             ENUMERATED {
                                        rw1, rw8, rw16, rw32, rw64, rw128, rw256,
                                        rw512, rw768, rw1024, rw1536, rw2047,
                                        rw2560, rw3072, rw3584, rw4095 }

RFC2507-Info ::=                    SEQUENCE {
    f-MAX-PERIOD                        INTEGER (1..65535)                  DEFAULT 256,
    f-MAX-TIME                          INTEGER (1..255)                    DEFAULT 5,
    max-HEADER                          INTEGER (60..65535)                 DEFAULT 168,
    tcp-SPACE                           INTEGER (3..255)                    DEFAULT 15,
    non-TCP-SPACE                       INTEGER (3..65535)                  DEFAULT 15,
    -- TABULAR: expectReordering has only two possible values, so using Optional or Default
    -- would be wasteful
    expectReordering                    ExpectReordering
}

RFC3095-Info-r4 ::=             SEQUENCE {
    rohcProfileList                     ROHC-ProfileList-r4,
    ul-RFC3095                          UL-RFC3095-r4                       OPTIONAL,
    dl-RFC3095                          DL-RFC3095-r4                       OPTIONAL
}

RLC-Info ::=                        SEQUENCE {
    ul-RLC-Mode                         UL-RLC-Mode                         OPTIONAL,
    dl-RLC-Mode                         DL-RLC-Mode                         OPTIONAL
}

RLC-Info-r5 ::=                     SEQUENCE {
    ul-RLC-Mode                         UL-RLC-Mode                         OPTIONAL,
    dl-RLC-Mode                         DL-RLC-Mode-r5                      OPTIONAL,
    rlc-OneSidedReEst                   BOOLEAN
}
```

```
RLC-Info-r6 ::=                     SEQUENCE {
    ul-RLC-Mode                         UL-RLC-Mode                         OPTIONAL,
    dl-RLC-Mode                         DL-RLC-Mode-r6                      OPTIONAL,
    rlc-OneSidedReEst                   BOOLEAN,
    altE-bitInterpretation              ENUMERATED { true }                 OPTIONAL
}

RLC-Info-MCCH-r6 ::=                SEQUENCE {
    dl-UM-RLC-LI-size                   DL-UM-RLC-LI-size,
    dl-UM-RLC-OutOSeqDelivery-Info      UM-RLC-OutOSeqDelivery-Info-r6      OPTIONAL
}

RLC-Info-MSCH-r6 ::=                SEQUENCE {
    dl-UM-RLC-LI-size                   DL-UM-RLC-LI-size
}

RLC-Info-MTCH-r6 ::=                SEQUENCE {
    dl-UM-RLC-LI-size                   DL-UM-RLC-LI-size,
    dl-UM-RLC-DuplAvoid-Reord-Info      UM-RLC-DuplAvoid-Reord-Info-r6      OPTIONAL
}

RLC-InfoChoice ::=                  CHOICE {
    rlc-Info                            RLC-Info,
    same-as-RB                          RB-Identity
}

RLC-InfoChoice-r5 ::=               CHOICE {
    rlc-Info                            RLC-Info-r5,
    same-as-RB                          RB-Identity
}

RLC-InfoChoice-r6 ::=               CHOICE {
    rlc-Info                            RLC-Info-r6,
    same-as-RB                          RB-Identity
}

RLC-PDU-Size ::=                    OctetModeRLC-SizeInfoType1

RLC-PDU-SizeList ::=                SEQUENCE (SIZE (1..maxRLCPDUsizePerLogChan)) OF
                                        RLC-PDU-Size

RLC-SequenceNumber ::=              INTEGER (0..4095)

RLC-SizeInfo ::=                    SEQUENCE {
    rlc-SizeIndex                       INTEGER (1..maxTF)
}

RLC-SizeExplicitList ::=            SEQUENCE (SIZE  (1..maxTF)) OF
                                        RLC-SizeInfo

ROHC-Profile-r4 ::=                 INTEGER (1..3)

ROHC-ProfileList-r4 ::=             SEQUENCE (SIZE  (1..maxROHC-Profile-r4))    OF
                                        ROHC-Profile-r4

ROHC-PacketSize-r4 ::=              INTEGER (2..1500)

ROHC-PacketSizeList-r4 ::=          SEQUENCE (SIZE  (1..maxROHC-PacketSizes-r4))    OF
                                        ROHC-PacketSize-r4

SRB-InformationSetup ::=            SEQUENCE {
    -- The default value for rb-Identity is the smallest value not used yet.
    rb-Identity                         RB-Identity                         OPTIONAL,
    rlc-InfoChoice                      RLC-InfoChoice,
    rb-MappingInfo                      RB-MappingInfo
}

SRB-InformationSetup-r5 ::=         SEQUENCE {
    -- The default value for rb-Identity is the smallest value not used yet.
    rb-Identity                         RB-Identity                         OPTIONAL,
    rlc-InfoChoice                      RLC-InfoChoice-r5,
    rb-MappingInfo                      RB-MappingInfo-r5
}

SRB-InformationSetup-r6 ::=         SEQUENCE {
    -- The default value for rb-Identity is the smallest value not used yet.
    rb-Identity                         RB-Identity                         OPTIONAL,
```

```
    rlc-InfoChoice                      RLC-InfoChoice-r6,
    rb-MappingInfo                      RB-MappingInfo-r6
}

SRB-InformationSetupList ::=        SEQUENCE (SIZE (1..maxSRBsetup)) OF
                                        SRB-InformationSetup

SRB-InformationSetupList-r5 ::=     SEQUENCE (SIZE (1..maxSRBsetup)) OF
                                        SRB-InformationSetup-r5

SRB-InformationSetupList-r6 ::=     SEQUENCE (SIZE (1..maxSRBsetup)) OF
                                        SRB-InformationSetup-r6

SRB-InformationSetupList2 ::=       SEQUENCE (SIZE (3..4)) OF
                                        SRB-InformationSetup

SRB-InformationSetupList2-r6 ::=    SEQUENCE (SIZE (3..4)) OF
                                        SRB-InformationSetup-r6

TimerDAR-r6 ::=                     ENUMERATED {
                                        ms40, ms80, ms120, ms160, ms240, ms320, ms480, ms640,
                                        ms960, ms1280, ms1920, ms2560, ms3840, ms5120 }

TimerDiscard ::=                    ENUMERATED {
                                        td0-1, td0-25, td0-5, td0-75,
                                        td1, td1-25, td1-5, td1-75,
                                        td2, td2-5, td3, td3-5, td4,
                                        td4-5, td5, td7-5 }

TimerEPC ::=                        ENUMERATED {
                                        te50, te60, te70, te80, te90,
                                        te100, te120, te140, te160, te180,
                                        te200, te300, te400, te500, te700,
                                        te900 }

TimerMRW ::=                        ENUMERATED {
                                        te50, te60, te70, te80, te90, te100,
                                        te120, te140, te160, te180, te200,
                                        te300, te400, te500, te700, te900 }

TimerOSD-r6 ::=                     ENUMERATED {
                                        ms40, ms80, ms120, ms160, ms240, ms320, ms480, ms640,
                                        ms960, ms1280, ms1920, ms2560, ms3840, ms5120 }

TimerPoll ::=                       ENUMERATED {
                                        tp10, tp20, tp30, tp40, tp50,
                                        tp60, tp70, tp80, tp90, tp100,
                                        tp110, tp120, tp130, tp140, tp150,
                                        tp160, tp170, tp180, tp190, tp200,
                                        tp210, tp220, tp230, tp240, tp250,
                                        tp260, tp270, tp280, tp290, tp300,
                                        tp310, tp320, tp330, tp340, tp350,
                                        tp360, tp370, tp380, tp390, tp400,
                                        tp410, tp420, tp430, tp440, tp450,
                                        tp460, tp470, tp480, tp490, tp500,
                                        tp510, tp520, tp530, tp540, tp550,
                                        tp600, tp650, tp700, tp750, tp800,
                                        tp850, tp900, tp950, tp1000 }

TimerPollPeriodic ::=               ENUMERATED {
                                        tper100, tper200, tper300, tper400,
                                        tper500, tper750, tper1000, tper2000 }

TimerPollProhibit ::=               ENUMERATED {
                                        tpp10, tpp20, tpp30, tpp40, tpp50,
                                        tpp60, tpp70, tpp80, tpp90, tpp100,
                                        tpp110, tpp120, tpp130, tpp140, tpp150,
                                        tpp160, tpp170, tpp180, tpp190, tpp200,
                                        tpp210, tpp220, tpp230, tpp240, tpp250,
                                        tpp260, tpp270, tpp280, tpp290, tpp300,
                                        tpp310, tpp320, tpp330, tpp340, tpp350,
                                        tpp360, tpp370, tpp380, tpp390, tpp400,
                                        tpp410, tpp420, tpp430, tpp440, tpp450,
                                        tpp460, tpp470, tpp480, tpp490, tpp500,
                                        tpp510, tpp520, tpp530, tpp540, tpp550,
                                        tpp600, tpp650, tpp700, tpp750, tpp800,
                                        tpp850, tpp900, tpp950, tpp1000 }
```

```
TimerRST ::=                        ENUMERATED {
                                        tr50, tr100, tr150, tr200, tr250, tr300,
                                        tr350, tr400, tr450, tr500, tr550,
                                        tr600, tr700, tr800, tr900, tr1000 }

TimerStatusPeriodic ::=             ENUMERATED {
                                        tsp100, tsp200, tsp300, tsp400, tsp500,
                                        tsp750, tsp1000, tsp2000 }

TimerStatusProhibit ::=             ENUMERATED {
                                        tsp10,tsp20,tsp30,tsp40,tsp50,
                                        tsp60,tsp70,tsp80,tsp90,tsp100,
                                        tsp110,tsp120,tsp130,tsp140,tsp150,
                                        tsp160,tsp170,tsp180,tsp190,tsp200,
                                        tsp210,tsp220,tsp230,tsp240,tsp250,
                                        tsp260,tsp270,tsp280,tsp290,tsp300,
                                        tsp310,tsp320,tsp330,tsp340,tsp350,
                                        tsp360,tsp370,tsp380,tsp390,tsp400,
                                        tsp410,tsp420,tsp430,tsp440,tsp450,
                                        tsp460,tsp470,tsp480,tsp490,tsp500,
                                        tsp510,tsp520,tsp530,tsp540,tsp550,
                                        tsp600,tsp650,tsp700,tsp750,tsp800,
                                        tsp850,tsp900,tsp950,tsp1000 }

TransmissionRLC-Discard ::=         CHOICE {
    timerBasedExplicit                  ExplicitDiscard,
    timerBasedNoExplicit                NoExplicitDiscard,
    maxDAT-Retransmissions              MaxDAT-Retransmissions,
    noDiscard                           MaxDAT
}

TransmissionWindowSize ::=          ENUMERATED {
                                        tw1, tw8, tw16, tw32, tw64, tw128, tw256,
                                        tw512, tw768, tw1024, tw1536, tw2047,
                                        tw2560, tw3072, tw3584, tw4095 }

UL-AM-RLC-Mode ::=                  SEQUENCE {
    transmissionRLC-Discard             TransmissionRLC-Discard,
    transmissionWindowSize              TransmissionWindowSize,
    timerRST                            TimerRST,
    max-RST                             MaxRST,
    pollingInfo                         PollingInfo                         OPTIONAL
}

UL-CounterSynchronisationInfo ::=       SEQUENCE {
    rB-WithPDCP-InfoList                    RB-WithPDCP-InfoList    OPTIONAL,
    startList                               STARTList
}

UL-LogicalChannelMapping ::=        SEQUENCE {
    -- TABULAR: UL-TransportChannelType contains TransportChannelIdentity as well.
    ul-TransportChannelType             UL-TransportChannelType,
    logicalChannelIdentity              LogicalChannelIdentity              OPTIONAL,
    rlc-SizeList                        CHOICE {
        allSizes                            NULL,
        configured                          NULL,
        explicitList                        RLC-SizeExplicitList
    },
    mac-LogicalChannelPriority          MAC-LogicalChannelPriority
}

UL-LogicalChannelMapping-r6 ::=     SEQUENCE {
    ul-TrCH-Type                        CHOICE {
        dch-rach-usch                       SEQUENCE {
            -- TABULAR: UL-TransportChannelType contains TransportChannelIdentity as well.
            ul-TransportChannelType             UL-TransportChannelType,
            logicalChannelIdentity              LogicalChannelIdentity              OPTIONAL,
            rlc-SizeList                        CHOICE {
                allSizes                            NULL,
                configured                          NULL,
                explicitList                        RLC-SizeExplicitList
            }
        },
        e-dch                               SEQUENCE {
            logicalChannelIdentity              LogicalChannelIdentity,
            e-DCH-MAC-d-FlowIdentity            E-DCH-MAC-d-FlowIdentity,
            ddi                                 DDI,
            rlc-PDU-SizeList                    RLC-PDU-SizeList,
```

```
            includeInSchedulingInfo             BOOLEAN
        }
    },
    mac-LogicalChannelPriority          MAC-LogicalChannelPriority
}

UL-LogicalChannelMappingList ::=    SEQUENCE {
    -- rlc-LogicalChannelMappingIndicator shall be set to TRUE in this version
    -- of the specification
    rlc-LogicalChannelMappingIndicator  BOOLEAN,
    ul-LogicalChannelMapping            SEQUENCE (SIZE (maxLoCHperRLC)) OF
                                        UL-LogicalChannelMapping
}

UL-LogicalChannelMappingList-r6 ::= SEQUENCE {
    -- rlc-LogicalChannelMappingIndicator shall be set to TRUE in this version
    -- of the specification
    rlc-LogicalChannelMappingIndicator  BOOLEAN,
    ul-LogicalChannelMapping            SEQUENCE (SIZE (maxLoCHperRLC)) OF
                                            UL-LogicalChannelMapping-r6
}

UL-LogicalChannelMappings ::=       CHOICE {
    oneLogicalChannel                   UL-LogicalChannelMapping,
    twoLogicalChannels                  UL-LogicalChannelMappingList
}

UL-LogicalChannelMappings-r6 ::=    CHOICE {
    oneLogicalChannel                   UL-LogicalChannelMapping-r6,
    twoLogicalChannels                  UL-LogicalChannelMappingList-r6
}

UL-RFC3095-r4 ::=                   SEQUENCE {
    -- dummy1 is not used in this version of the specification and shall be ignored by the receiver.
    dummy1                              CID-InclusionInfo-r4,
    max-CID                             INTEGER (1..16383)                  DEFAULT 15,
    -- dummy is not used in this version of the specification and
    -- it should be ignored by the receiver.
    dummy                               ROHC-PacketSizeList-r4
}

UL-RLC-Mode ::=                     CHOICE {
    ul-AM-RLC-Mode                      UL-AM-RLC-Mode,
    ul-UM-RLC-Mode                      UL-UM-RLC-Mode,
    ul-TM-RLC-Mode                      UL-TM-RLC-Mode,
    spare                               NULL
}

UL-TM-RLC-Mode ::=                  SEQUENCE {
    transmissionRLC-Discard             TransmissionRLC-Discard             OPTIONAL,
    segmentationIndication              BOOLEAN
}

UL-UM-RLC-Mode ::=                  SEQUENCE {
    transmissionRLC-Discard             TransmissionRLC-Discard             OPTIONAL
}

UL-TransportChannelType ::=         CHOICE {
    dch                                 TransportChannelIdentity,
    rach                                NULL,
    -- dummy is not used in this version of the specification and
    -- if received the UE behaviour is not specified.
    dummy                               NULL,
    usch                                TransportChannelIdentity
}

UM-RLC-DuplAvoid-Reord-Info-r6 ::=  SEQUENCE {
    timer-DAR                           TimerDAR-r6,
    widowSize-DAR                       WindowSizeDAR-r6
}

UM-RLC-OutOSeqDelivery-Info-r6 ::=  SEQUENCE {
    timer-OSD                           TimerOSD-r6                         OPTIONAL,
    windowSize-OSD                      WindowSizeOSD-r6
}

WindowSizeDAR-r6 ::=                ENUMERATED {
                                        ws4, ws8, ws16, ws32, ws40, ws48,
```

```
                                    ws56, ws64 }

WindowSizeOSD-r6 ::=                ENUMERATED {
                                    ws8, ws16, ws32, ws40, ws48,
                                    ws56, ws64 }

-- **************************************************
--
--     TRANSPORT CHANNEL INFORMATION ELEMENTS (10.3.5)
--
-- **************************************************

AddOrReconfMAC-dFlow ::=            SEQUENCE {
    mac-hs-AddReconfQueue-List                  MAC-hs-AddReconfQueue-List  OPTIONAL,
    mac-hs-DelQueue-List                        MAC-hs-DelQueue-List    OPTIONAL
}

AllowedTFC-List ::=                 SEQUENCE (SIZE (1..maxTFC)) OF
                                    TFC-Value

AllowedTFI-List ::=                 SEQUENCE (SIZE (1..maxTF)) OF
                                    INTEGER (0..31)

BitModeRLC-SizeInfo ::=             CHOICE {
    sizeType1                       INTEGER (0..127),
    -- Actual value sizeType2 = (part1 * 8) + 128 + part2
    sizeType2                       SEQUENCE {
        part1                           INTEGER (0..15),
        part2                           INTEGER (1..7)                  OPTIONAL
    },
    -- Actual value sizeType3 = (part1 * 16) + 256 + part2
    sizeType3                       SEQUENCE {
        part1                           INTEGER (0..47),
        part2                           INTEGER (1..15)                 OPTIONAL
    },
    -- Actual value sizeType4 = (part1 * 64) + 1024 + part2
    sizeType4                       SEQUENCE {
        part1                           INTEGER (0..62),
        part2                           INTEGER (1..63)                 OPTIONAL
    }
}

-- Actual value BLER-QualityValue = IE value * 0.1
BLER-QualityValue ::=               INTEGER (-63..0)

ChannelCodingType ::=               CHOICE {
    -- noCoding is only used for TDD in this version of the specification,
    -- otherwise it should be ignored
    noCoding                        NULL,
    convolutional                   CodingRate,
    turbo                           NULL
}

CodingRate ::=                      ENUMERATED {
                                    half,
                                    third }

CommonDynamicTF-Info ::=            SEQUENCE {
    rlc-Size                        CHOICE {
        fdd                             SEQUENCE {
            octetModeRLC-SizeInfoType2          OctetModeRLC-SizeInfoType2
        },
        tdd                             SEQUENCE {
            commonTDD-Choice                CHOICE {
                bitModeRLC-SizeInfo             BitModeRLC-SizeInfo,
                octetModeRLC-SizeInfoType1      OctetModeRLC-SizeInfoType1
            }
        }
    },
    numberOfTbSizeList              SEQUENCE (SIZE (1..maxTF)) OF
                                            NumberOfTransportBlocks,
    logicalChannelList              LogicalChannelList
}

CommonDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    commonTDD-Choice                CHOICE {
        bitModeRLC-SizeInfo             BitModeRLC-SizeInfo,
        octetModeRLC-SizeInfoType1      OctetModeRLC-SizeInfoType1
```

```
    },
    numberOfTbSizeAndTTIList            NumberOfTbSizeAndTTIList,
    logicalChannelList                  LogicalChannelList
}

CommonDynamicTF-InfoList ::=        SEQUENCE (SIZE (1..maxTF)) OF
                                        CommonDynamicTF-Info

CommonDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
                                        CommonDynamicTF-Info-DynamicTTI

CommonTransChTFS ::=                SEQUENCE {
    tti                                 CHOICE {
        tti10                               CommonDynamicTF-InfoList,
        tti20                               CommonDynamicTF-InfoList,
        tti40                               CommonDynamicTF-InfoList,
        tti80                               CommonDynamicTF-InfoList,
        dynamic                             CommonDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information            SemistaticTF-Information
}

CommonTransChTFS-LCR ::=                SEQUENCE {
    tti                                 CHOICE {
        tti5                                CommonDynamicTF-InfoList,
        tti10                               CommonDynamicTF-InfoList,
        tti20                               CommonDynamicTF-InfoList,
        tti40                               CommonDynamicTF-InfoList,
        tti80                               CommonDynamicTF-InfoList,
        dynamic                             CommonDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information            SemistaticTF-Information
}

CPCH-SetID ::=                      INTEGER (1..maxCPCHsets)

CRC-Size ::=                        ENUMERATED {
                                        crc0, crc8, crc12, crc16, crc24 }

DedicatedDynamicTF-Info ::=         SEQUENCE {
    rlc-Size                            CHOICE {
        bitMode                             BitModeRLC-SizeInfo,
        octetModeType1                      OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeList              SEQUENCE (SIZE (1..maxTF)) OF
    NumberOfTransportBlocks,
    logicalChannelList              LogicalChannelList
}

DedicatedDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    rlc-Size                            CHOICE {
        bitMode                             BitModeRLC-SizeInfo,
        octetModeType1                      OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeAndTTIList            NumberOfTbSizeAndTTIList,
    logicalChannelList              LogicalChannelList
}

DedicatedDynamicTF-InfoList ::=     SEQUENCE (SIZE (1..maxTF)) OF
                                        DedicatedDynamicTF-Info

DedicatedDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
                                        DedicatedDynamicTF-Info-DynamicTTI

DedicatedTransChTFS ::=             SEQUENCE {
    tti                                 CHOICE {
        tti10                               DedicatedDynamicTF-InfoList,
        tti20                               DedicatedDynamicTF-InfoList,
        tti40                               DedicatedDynamicTF-InfoList,
        tti80                               DedicatedDynamicTF-InfoList,
        dynamic                             DedicatedDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information            SemistaticTF-Information
}

-- The maximum allowed size of DL-AddReconfTransChInfo2List sequence is 16
DL-AddReconfTransChInfo2List ::=    SEQUENCE (SIZE (1..maxTrCHpreconf)) OF
                                        DL-AddReconfTransChInformation2
```

```
-- The maximum allowed size of DL-AddReconfTransChInfoList sequence is 16
DL-AddReconfTransChInfoList ::=     SEQUENCE (SIZE (1..maxTrCHpreconf)) OF
                                        DL-AddReconfTransChInformation

-- The maximum allowed size of DL-AddReconfTransChInfoList-r4 sequence is 16
DL-AddReconfTransChInfoList-r4 ::=  SEQUENCE (SIZE (1..maxTrCHpreconf)) OF
                                        DL-AddReconfTransChInformation-r4

-- The maximum allowed size of DL-AddReconfTransChInfoList-r5 sequence is 16
DL-AddReconfTransChInfoList-r5 ::=  SEQUENCE (SIZE (1..maxTrCHpreconf)) OF
                                        DL-AddReconfTransChInformation-r5

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of messages other than: Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation ::=  SEQUENCE {
    dl-TransportChannelType             DL-TrCH-Type,
    dl-transportChannelIdentity         TransportChannelIdentity,
    tfs-SignallingMode                  CHOICE {
        explicit-config                     TransportFormatSet,
        sameAsULTrCH                        UL-TransportChannelIdentity
    },
    dch-QualityTarget                   QualityTarget                       OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                               TM-SignallingInfo                   OPTIONAL
}

DL-AddReconfTransChInformation-r4 ::=   SEQUENCE {
    dl-TransportChannelType             DL-TrCH-Type,
    dl-transportChannelIdentity         TransportChannelIdentity,
    tfs-SignallingMode                  CHOICE {
        explicit-config                     TransportFormatSet,
        sameAsULTrCH                        UL-TransportChannelIdentity
    },
    dch-QualityTarget                   QualityTarget                       OPTIONAL
}

DL-AddReconfTransChInformation-r5 ::=   SEQUENCE {
    dl-TransportChannelType             DL-TrCH-TypeId1-r5,
    tfs-SignallingMode                  CHOICE {
        explicit-config                     TransportFormatSet,
        sameAsULTrCH                        UL-TransportChannelIdentity,
        hsdsch                              HSDSCH-Info
    },
    dch-QualityTarget                   QualityTarget                       OPTIONAL
}

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation2 ::= SEQUENCE {
    dl-TransportChannelType             DL-TrCH-Type,
    transportChannelIdentity            TransportChannelIdentity,
    tfs-SignallingMode                  CHOICE {
        explicit-config                     TransportFormatSet,
        sameAsULTrCH                        UL-TransportChannelIdentity
    },
    qualityTarget                       QualityTarget                       OPTIONAL
}

DL-CommonTransChInfo ::=            SEQUENCE {
    sccpch-TFCS                         TFCS                                OPTIONAL,
    -- modeSpecificInfo should be optional. A new version of this IE should be defined
    -- to be used in later versions of messages using this IE
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            dl-Parameters                       CHOICE {
                dl-DCH-TFCS                         TFCS,
                sameAsUL                            NULL
            }                                                               OPTIONAL
        },
        tdd                                 SEQUENCE {
            individualDL-CCTrCH-InfoList        IndividualDL-CCTrCH-InfoList
                                                                            OPTIONAL
        }
    }
```

```
}

DL-CommonTransChInfo-r4 ::=         SEQUENCE {
    sccpch-TFCS                         TFCS                                    OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            dl-Parameters                       CHOICE {
                dl-DCH-TFCS                         SEQUENCE {
                    tfcs                                TFCS                    OPTIONAL
                },
                sameAsUL                            NULL
            }                                                                   OPTIONAL
        },
        tdd                                 SEQUENCE {
            individualDL-CCTrCH-InfoList        IndividualDL-CCTrCH-InfoList
                                                                                OPTIONAL
        }
    }   OPTIONAL
}

DL-DeletedTransChInfoList ::=       SEQUENCE (SIZE (1..maxTrCH)) OF
                                        DL-TransportChannelIdentity

DL-DeletedTransChInfoList-r5 ::=    SEQUENCE (SIZE (1..maxTrCH)) OF
                                        DL-TransportChannelIdentity-r5

DL-TransportChannelIdentity ::=         SEQUENCE {
    dl-TransportChannelType             DL-TrCH-Type,
    dl-TransportChannelIdentity         TransportChannelIdentity
}

DL-TransportChannelIdentity-r5 ::=      SEQUENCE {
    dl-TransportChannelType             DL-TrCH-TypeId2-r5
}

-- The choice "dsch" should not be used in FDD mode, and if received the UE behaviour is unspecified
DL-TrCH-Type ::=                    ENUMERATED {dch, dsch}

DL-TrCH-TypeId1-r5 ::=              CHOICE {
    dch                                 TransportChannelIdentity,
    -- The choice "dsch" should not be used in FDD mode, and if received
    -- the UE behaviour is unspecified.
    dsch                                TransportChannelIdentity,
    hsdsch                              NULL
}

DL-TrCH-TypeId2-r5 ::=              CHOICE {
    dch                                 TransportChannelIdentity,
    -- The choice "dsch" should not be used in FDD mode, and if received
    -- the UE behaviour is unspecified.
    dsch                                TransportChannelIdentity,
    hsdsch                              MAC-d-FlowIdentity
}

DRAC-ClassIdentity ::=              INTEGER (1..maxDRACclasses)

DRAC-StaticInformation ::=          SEQUENCE {
    transmissionTimeValidity            TransmissionTimeValidity,
    timeDurationBeforeRetry             TimeDurationBeforeRetry,
    drac-ClassIdentity                  DRAC-ClassIdentity
}

DRAC-StaticInformationList ::=      SEQUENCE (SIZE (1..maxTrCH)) OF
                                        DRAC-StaticInformation


E-DCH-AddReconf-MAC-d-Flow ::=      SEQUENCE {
    mac-d-FlowIdentity                  E-DCH-MAC-d-FlowIdentity,
    mac-d-FlowPowerOffset               E-DCH-MAC-d-FlowPowerOffset         OPTIONAL,
    mac-d-FlowMaxRetrans                E-DCH-MAC-d-FlowMaxRetrans          OPTIONAL,
    mac-d-FlowMultiplexingList          E-DCH-MAC-d-FlowMultiplexingList    OPTIONAL,
    transmissionGrantType               CHOICE {
        non-ScheduledTransGrantInfo         SEQUENCE {
            maxMAC-e-PDUContents                INTEGER (1..19982),
            ms2-NonSchedTransmGrantHARQAlloc    BIT STRING (SIZE (8))       OPTIONAL
        },
        scheduledTransmissionGrantInfo      NULL
    }   OPTIONAL
}
```

```
E-DCH-AddReconf-MAC-d-Flow-r7 ::=   SEQUENCE {
    mac-d-FlowIdentity                  E-DCH-MAC-d-FlowIdentity,
    mac-d-FlowPowerOffset               E-DCH-MAC-d-FlowPowerOffset         OPTIONAL,
    mac-d-FlowMaxRetrans                E-DCH-MAC-d-FlowMaxRetrans          OPTIONAL,
    mac-d-FlowMultiplexingList          E-DCH-MAC-d-FlowMultiplexingList    OPTIONAL,
    transmissionGrantType               CHOICE {
        non-ScheduledTransGrantInfo         SEQUENCE {
            modeSpecificInfo                    CHOICE {
                fdd                                 SEQUENCE {
                    maxMAC-e-PDUContents                INTEGER (1..19982),
                    ms2-NonSchedTransmGrantHARQAlloc    BIT STRING (SIZE (8))       OPTIONAL
                },
                tdd                                 SEQUENCE {
                    tddOption                           CHOICE {
                        tdd384-768                          SEQUENCE {
                            timeslotResourceRelatedInfo         BIT STRING (SIZE (13)),
                            powerResourceRelatedInfo            INTEGER (1..16),
                            activationTime                      ActivationTime,
                            repetitionPeriod                    ENUMERATED { rp1, rp2, rp4, rp8,
                                                                    rp16, rp32, rp64}   OPTIONAL,
                            repetitionLength                    INTEGER (0..64),
                            codeResourceInfo                    UL-TS-ChannelisationCode
                        },
                        tdd128                              NULL
                    }
                }
            }
        },
        scheduledTransmissionGrantInfo      NULL
    }   OPTIONAL
}

E-DCH-AddReconf-MAC-d-FlowList ::=  SEQUENCE (SIZE (1..maxE-DCHMACdFlow)) OF
                            E-DCH-AddReconf-MAC-d-Flow

E-DCH-AddReconf-MAC-d-FlowList-r7 ::= SEQUENCE (SIZE (1..maxE-DCHMACdFlow)) OF
                                E-DCH-AddReconf-MAC-d-Flow-r7

E-DCH-MAC-d-FlowIdentity ::=        INTEGER (0..maxE-DCHMACdFlow-1)

E-DCH-MAC-d-FlowMaxRetrans ::=      INTEGER (0..15)

E-DCH-MAC-d-FlowMultiplexingList ::= BIT STRING (SIZE (maxE-DCHMACdFlow))

E-DCH-MAC-d-FlowPowerOffset ::=     INTEGER (0..6)

E-DCH-TTI ::=                       ENUMERATED { tti2, tti10 }

ExplicitTFCS-Configuration ::=      CHOICE {
    complete                            TFCS-ReconfAdd,
    addition                            TFCS-ReconfAdd,
    removal                             TFCS-RemovalList,
    replacement                         SEQUENCE {
        tfcsRemoval                         TFCS-RemovalList,
        tfcsAdd                             TFCS-ReconfAdd
    }
}

GainFactor ::=                      INTEGER (0..15)

GainFactorInformation ::=           CHOICE {
    signalledGainFactors                SignalledGainFactors,
    computedGainFactors                 ReferenceTFC-ID
}

HSDSCH-Info ::=                     SEQUENCE {
    harqInfo                            HARQ-Info               OPTIONAL,
    addOrReconfMAC-dFlow                AddOrReconfMAC-dFlow    OPTIONAL
}

HARQ-Info ::=                       SEQUENCE {
    numberOfProcesses                   INTEGER (1..8),
    memoryPartitioning                  CHOICE {
        implicit                            NULL,
        explicit                            SEQUENCE (SIZE (1..maxHProcesses)) OF
                                                HARQMemorySize
    }
```

```
}

HARQMemorySize ::=                  ENUMERATED {
                                        hms800, hms1600, hms2400, hms3200, hms4000,
                                        hms4800, hms5600, hms6400, hms7200, hms8000,
                                        hms8800, hms9600, hms10400, hms11200, hms12000,
                                        hms12800, hms13600, hms14400, hms15200, hms16000,
                                        hms17600, hms19200, hms20800, hms22400, hms24000,
                                        hms25600, hms27200, hms28800, hms30400, hms32000,
                                        hms36000, hms40000, hms44000, hms48000, hms52000,
                                        hms56000, hms60000, hms64000, hms68000, hms72000,
                                        hms76000, hms80000, hms88000, hms96000, hms104000,
                                        hms112000, hms120000, hms128000, hms136000, hms144000,
                                        hms152000, hms160000, hms176000, hms192000, hms208000,
                                        hms224000, hms240000, hms256000, hms272000, hms288000,
                                        hms304000 }

IndividualDL-CCTrCH-Info ::=        SEQUENCE {
    dl-TFCS-Identity                    TFCS-Identity,
    tfcs-SignallingMode                 CHOICE {
        explicit-config                     TFCS,
        sameAsUL                            TFCS-Identity
    }
}

IndividualDL-CCTrCH-InfoList ::=    SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        IndividualDL-CCTrCH-Info

IndividualUL-CCTrCH-Info ::=        SEQUENCE {
    ul-TFCS-Identity                    TFCS-Identity,
    ul-TFCS                             TFCS ,
    tfc-Subset                          TFC-Subset
}

IndividualUL-CCTrCH-InfoList ::=    SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        IndividualUL-CCTrCH-Info

LogicalChannelByRB ::=              SEQUENCE {
    rb-Identity                         RB-Identity,
    logChOfRb                           INTEGER (0..1)                      OPTIONAL
}

LogicalChannelList ::=              CHOICE {
        allSizes                            NULL,
        configured                          NULL,
        explicitList                        SEQUENCE (SIZE (1..15)) OF
                                                LogicalChannelByRB
}

MAC-d-FlowIdentityDCHandHSDSCH ::=  SEQUENCE {
    dch-transport-ch-id             TransportChannelIdentity,
    hsdsch-mac-d-flow-id            MAC-d-FlowIdentity
}

MAC-d-FlowIdentity ::=              INTEGER (0..7)

MAC-d-PDU-SizeInfo-List ::=         SEQUENCE (SIZE(1.. maxMAC-d-PDUsizes)) OF
                                        MAC-d-PDUsizeInfo

--MAC-d-Pdu sizes need to be defined
MAC-d-PDUsizeInfo ::=               SEQUENCE{
    mac-d-PDU-Size                      INTEGER (1..5000),
    mac-d-PDU-Index                     INTEGER(0..7)
}

MAC-hs-AddReconfQueue-List ::=              SEQUENCE (SIZE(1..maxQueueIDs)) OF
                                        MAC-hs-AddReconfQueue

MAC-hs-AddReconfQueue ::=           SEQUENCE {
    mac-hsQueueId                       INTEGER(0..7),
    mac-dFlowId                         MAC-d-FlowIdentity,
    reorderingReleaseTimer              T1-ReleaseTimer,
    mac-hsWindowSize                    MAC-hs-WindowSize,
    mac-d-PDU-SizeInfo-List             MAC-d-PDU-SizeInfo-List             OPTIONAL
}

MAC-hs-DelQueue-List ::=                SEQUENCE (SIZE(1..maxQueueIDs)) OF
                                        MAC-hs-DelQueue
```

```
MAC-hs-DelQueue ::=                 SEQUENCE {
    mac-hsQueueId                       INTEGER(0..7)
}

MAC-hs-WindowSize ::=               ENUMERATED {
                                        mws4, mws6, mws8, mws12, mws16, mws24, mws32 }

NumberOfTbSizeAndTTIList ::=        SEQUENCE (SIZE (1..maxTF)) OF SEQUENCE {
        numberOfTransportBlocks             NumberOfTransportBlocks,
        transmissionTimeInterval            TransmissionTimeInterval
}

MessType ::=                        ENUMERATED {
                                        transportFormatCombinationControl }

Non-allowedTFC-List ::=             SEQUENCE (SIZE (1..maxTFC)) OF
                                        TFC-Value

NumberOfTransportBlocks ::=         CHOICE {
    zero                                NULL,
    one                                 NULL,
    small                               INTEGER (2..17),
    large                               INTEGER (18..512)
}

OctetModeRLC-SizeInfoType1 ::=      CHOICE {
    -- Actual size = (8 * sizeType1) + 16
    sizeType1                           INTEGER (0..31),
    sizeType2                           SEQUENCE {
        -- Actual size = (32 * part1) + 272 + (part2 * 8)
        part1                               INTEGER (0..23),
        part2                               INTEGER (1..3)                  OPTIONAL
    },
    sizeType3                           SEQUENCE {
        -- Actual size = (64 * part1) + 1040 + (part2 * 8)
        part1                               INTEGER (0..61),
        part2                               INTEGER (1..7)                  OPTIONAL
    }
}

OctetModeRLC-SizeInfoType2 ::=      CHOICE {
    -- Actual size = (sizeType1 * 8) + 48
    sizeType1                           INTEGER (0..31),
    -- Actual size = (sizeType2 * 16) + 312
    sizeType2                           INTEGER (0..63),
    -- Actual size = (sizeType3 *64) + 1384
    sizeType3                           INTEGER (0..56)
}

PowerOffsetInfoShort ::=            SEQUENCE {
    referenceTFC                        TFC-Value,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            gainFactorBetaC                     GainFactor
        },
        tdd                                 NULL
    },
    gainFactorBetaD                     GainFactor
}

PowerOffsetInformation ::=          SEQUENCE {
    gainFactorInformation               GainFactorInformation,
    -- PowerOffsetPp-m is always absent in TDD
    powerOffsetPp-m                     PowerOffsetPp-m                 OPTIONAL
}

PowerOffsetPp-m ::=                 INTEGER (-5..10)

PreDefTransChConfiguration ::=      SEQUENCE {
    ul-CommonTransChInfo                UL-CommonTransChInfo,
    ul-AddReconfTrChInfoList            UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo                DL-CommonTransChInfo,
    dl-TrChInfoList                     DL-AddReconfTransChInfoList
}

QualityTarget ::=                   SEQUENCE {
    bler-QualityValue                   BLER-QualityValue
```

```
}

RateMatchingAttribute ::=           INTEGER (1..hiRM)


ReferenceTFC-ID ::=                 INTEGER (0..3)

RestrictedTrChInfo ::=              SEQUENCE {
    ul-TransportChannelType             UL-TrCH-Type,
    restrictedTrChIdentity              TransportChannelIdentity,
    allowedTFI-List                     AllowedTFI-List                     OPTIONAL
}

RestrictedTrChInfoList ::=          SEQUENCE (SIZE (1..maxTrCH)) OF
                                        RestrictedTrChInfo

SemistaticTF-Information ::=        SEQUENCE {
    -- TABULAR: Transmission time interval has been included in the IE CommonTransChTFS.
    channelCodingType                   ChannelCodingType,
    rateMatchingAttribute               RateMatchingAttribute,
    crc-Size                            CRC-Size
}

SignalledGainFactors ::=            SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            gainFactorBetaC                     GainFactor
        },
        tdd                                 NULL
    },
    gainFactorBetaD                     GainFactor,
    referenceTFC-ID                     ReferenceTFC-ID                     OPTIONAL
}

SplitTFCI-Signalling ::=            SEQUENCE {
    splitType                           SplitType                       OPTIONAL,
    tfci-Field2-Length                  INTEGER (1..10)                 OPTIONAL,
    tfci-Field1-Information             ExplicitTFCS-Configuration      OPTIONAL,
    tfci-Field2-Information             TFCI-Field2-Information         OPTIONAL
}

SplitType ::=                       ENUMERATED {
                                        hardSplit, logicalSplit }

T1-ReleaseTimer ::=                 ENUMERATED {
                                        rt10, rt20, rt30, rt40, rt50,
                                        rt60, rt70, rt80, rt90, rt100,
                                        rt120, rt140, rt160, rt200, rt300,
                                        rt400 }

TFC-Subset ::=                      CHOICE {
    minimumAllowedTFC-Number            TFC-Value,
    allowedTFC-List                     AllowedTFC-List,
    non-allowedTFC-List                 Non-allowedTFC-List,
    restrictedTrChInfoList              RestrictedTrChInfoList,
    fullTFCS                            NULL
}

TFC-SubsetList ::=                  SEQUENCE (SIZE (1.. maxTFCsub)) OF SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 NULL,
        tdd                                 SEQUENCE {
            tfcs-ID                             TFCS-Identity               OPTIONAL
        }
    },
    tfc-Subset                          TFC-Subset
}

TFC-Value ::=                       INTEGER (0..1023)

TFCI-Field2-Information ::=         CHOICE {
    tfci-Range                          TFCI-RangeList,
    explicit-config                     ExplicitTFCS-Configuration
}

TFCI-Range ::=                      SEQUENCE {
    maxTFCIField2Value                  INTEGER (1..1023),
    tfcs-InfoForDSCH                    TFCS-InfoForDSCH
```

```
}

TFCI-RangeList ::=                  SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
                                        TFCI-Range

TFCS ::=                            CHOICE {
    normalTFCI-Signalling               ExplicitTFCS-Configuration,
    -- dummy is not used in this version of specification, it should
    -- not be sent and if received the UE behaviour is not specified.
    dummy                               SplitTFCI-Signalling
}

TFCS-Identity ::=                   SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    sharedChannelIndicator              BOOLEAN
}

TFCS-IdentityPlain ::=              INTEGER (1..8)

TFCS-InfoForDSCH ::=                CHOICE {
    ctfc2bit                            INTEGER (0..3),
    ctfc4bit                            INTEGER (0..15),
    ctfc6bit                            INTEGER (0..63),
    ctfc8bit                            INTEGER (0..255),
    ctfc12bit                           INTEGER (0..4095),
    ctfc16bit                           INTEGER (0..65535),
    ctfc24bit                           INTEGER (0..16777215)
}

TFCS-ReconfAdd ::=                  SEQUENCE{
    ctfcSize                            CHOICE{
        ctfc2Bit                            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc2                               INTEGER (0..3),
            powerOffsetInformation              PowerOffsetInformation          OPTIONAL
        },
        ctfc4Bit                            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc4                               INTEGER (0..15),
            powerOffsetInformation              PowerOffsetInformation          OPTIONAL
        },
        ctfc6Bit                            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc6                               INTEGER (0..63),
            powerOffsetInformation              PowerOffsetInformation          OPTIONAL
        },
        ctfc8Bit                            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc8                               INTEGER (0..255),
            powerOffsetInformation              PowerOffsetInformation          OPTIONAL
        },
        ctfc12Bit                           SEQUENCE (SIZE(1..maxTFC)) OF SEQUENCE {
            ctfc12                              INTEGER (0..4095),
            powerOffsetInformation              PowerOffsetInformation          OPTIONAL
        },
        ctfc16Bit                           SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc16                              INTEGER(0..65535),
            powerOffsetInformation              PowerOffsetInformation          OPTIONAL
        },
        ctfc24Bit                           SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc24                              INTEGER(0..16777215),
            powerOffsetInformation              PowerOffsetInformation          OPTIONAL
        }
    }
}

TFCS-Removal ::=                    SEQUENCE {
    tfci                                INTEGER (0..1023)
}

TFCS-RemovalList ::=                SEQUENCE (SIZE (1..maxTFC)) OF
                                        TFCS-Removal

TimeDurationBeforeRetry ::=         INTEGER (1..256)

TM-SignallingInfo ::=               SEQUENCE {
    messType                            MessType,
    tm-SignallingMode                   CHOICE {
        mode1                               NULL,
        mode2                               SEQUENCE {
            -- in ul-controlledTrChList, TrCH-Type is always DCH
            ul-controlledTrChList               UL-ControlledTrChList
```

```
        }
    }
}

TransmissionTimeInterval ::=        ENUMERATED {
                                        tti10, tti20, tti40, tti80 }

TransmissionTimeValidity ::=        INTEGER (1..256)

TransportChannelIdentity ::=        INTEGER (1..32)

TransportChannelIdentityDCHandDSCH ::=  SEQUENCE {
    dch-transport-ch-id             TransportChannelIdentity,
    dsch-transport-ch-id            TransportChannelIdentity
}


TransportFormatSet ::=              CHOICE {
    dedicatedTransChTFS                 DedicatedTransChTFS,
    commonTransChTFS                    CommonTransChTFS
}

TransportFormatSet-LCR ::=              CHOICE {
    dedicatedTransChTFS                 DedicatedTransChTFS,
    commonTransChTFS-LCR                CommonTransChTFS-LCR
}

-- The maximum allowed size of UL-AddReconfTransChInfoList sequence is 16
UL-AddReconfTransChInfoList ::=     SEQUENCE (SIZE (1..maxTrCHpreconf)) OF
                                        UL-AddReconfTransChInformation

-- The maximum allowed size of UL-AddReconfTransChInfoList-r6 sequence is 32
UL-AddReconfTransChInfoList-r6 ::=  SEQUENCE (SIZE (1..maxTrCH)) OF
                                        UL-AddReconfTransChInformation-r6

-- The maximum allowed size of UL-AddReconfTransChInfoList-r7 sequence is 32
UL-AddReconfTransChInfoList-r7 ::=  SEQUENCE (SIZE (1..maxTrCH)) OF
                                        UL-AddReconfTransChInformation-r7

UL-AddReconfTransChInformation ::= SEQUENCE {
    ul-TransportChannelType             UL-TrCH-Type,
    transportChannelIdentity            TransportChannelIdentity,
    transportFormatSet                  TransportFormatSet
}

UL-AddReconfTransChInformation-r6 ::= CHOICE {
    dch-usch                            SEQUENCE {
        ul-TransportChannelType             UL-TrCH-Type,
        transportChannelIdentity            TransportChannelIdentity,
        transportFormatSet                  TransportFormatSet
    },
    e-dch                               SEQUENCE {
        tti                                 E-DCH-TTI,
        harq-Info                           ENUMERATED { rv0, rvtable },
        addReconf-MAC-d-FlowList            E-DCH-AddReconf-MAC-d-FlowList  OPTIONAL
    }
}

UL-AddReconfTransChInformation-r7 ::= CHOICE {
    dch-usch                            SEQUENCE {
        ul-TransportChannelType             UL-TrCH-Type,
        transportChannelIdentity            TransportChannelIdentity,
        transportFormatSet                  TransportFormatSet
    },
    e-dch                               SEQUENCE {
        modeSpecific                        CHOICE {
            fdd                                 SEQUENCE {
                tti                                 E-DCH-TTI
            },
            tdd                                 NULL
        },
        harq-Info                           ENUMERATED { rv0, rvtable },
        addReconf-MAC-d-FlowList            E-DCH-AddReconf-MAC-d-FlowList-r7   OPTIONAL
    }
}

UL-CommonTransChInfo ::=            SEQUENCE {
    -- TABULAR: tfc-subset is applicable to FDD only, TDD specifies tfc-subset in individual
```

```
    -- CCTrCH Info.
    tfc-Subset                          TFC-Subset                          OPTIONAL,
    prach-TFCS                          TFCS                                OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            ul-TFCS                         TFCS
        },
        tdd                                 SEQUENCE {

            individualUL-CCTrCH-InfoList        IndividualUL-CCTrCH-InfoList
                                                                        OPTIONAL
        }
    }                                                                   OPTIONAL
}

UL-CommonTransChInfo-r4 ::=         SEQUENCE {
    -- TABULAR: tfc-subset is applicable to FDD only, TDD specifies tfc-subset in individual
    -- CCTrCH Info.
    tfc-Subset                          TFC-Subset                          OPTIONAL,
    prach-TFCS                          TFCS                                OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            ul-TFCS                             TFCS
        },
        tdd                                 SEQUENCE {
            individualUL-CCTrCH-InfoList        IndividualUL-CCTrCH-InfoList        OPTIONAL
        }
    }                                                                   OPTIONAL,
    tfc-SubsetList                      TFC-SubsetList                      OPTIONAL
}

-- In UL-ControlledTrChList, TrCH-Type is always DCH
UL-ControlledTrChList ::=           SEQUENCE (SIZE (1..maxTrCH)) OF
                                        TransportChannelIdentity

UL-DeletedTransChInfoList ::=       SEQUENCE (SIZE (1..maxTrCH)) OF
                                        UL-TransportChannelIdentity

UL-DeletedTransChInfoList-r6 ::=    SEQUENCE (SIZE (1..maxTrCH)) OF
                                        UL-TransportChannelIdentity-r6

UL-TransportChannelIdentity ::=     SEQUENCE {
    ul-TransportChannelType             UL-TrCH-Type,
    ul-TransportChannelIdentity         TransportChannelIdentity
}

UL-TransportChannelIdentity-r6 ::=  CHOICE {
    dch-usch                            SEQUENCE {
        ul-TransportChannelType             UL-TrCH-Type,
        ul-TransportChannelIdentity         TransportChannelIdentity
    },
    e-dch                               E-DCH-MAC-d-FlowIdentity
}

UL-TrCH-Type ::=                    ENUMERATED {dch, usch}

USCH-TransportChannelsInfo ::=      SEQUENCE (SIZE (1..maxTrCH)) OF
                                        SEQUENCE {
    usch-TransportChannelIdentity           TransportChannelIdentity,
    usch-TFS                                TransportFormatSet
}
-- **************************************************
--
--     PHYSICAL CHANNEL INFORMATION ELEMENTS (10.3.6)
--
-- **************************************************

ACK-NACK-repetitionFactor ::=       INTEGER(1..4)

AC-To-ASC-Mapping ::=               INTEGER (0..7)

AC-To-ASC-MappingTable ::=          SEQUENCE (SIZE (maxASCmap)) OF
                                        AC-To-ASC-Mapping

AccessServiceClass-FDD ::=          SEQUENCE {
    availableSignatureStartIndex        INTEGER (0..15),
    availableSignatureEndIndex          INTEGER (0..15),
```

```
    assignedSubChannelNumber            BIT STRING {
                                            b3(0),
                                            b2(1),
                                            b1(2),
                                            b0(3)
                                            }    (SIZE(4))
}

AccessServiceClass-TDD ::=          SEQUENCE {
    channelisationCodeIndices           BIT STRING  {
                                            chCodeIndex7(0),
                                            chCodeIndex6(1),
                                            chCodeIndex5(2),
                                            chCodeIndex4(3),
                                            chCodeIndex3(4),
                                            chCodeIndex2(5),
                                            chCodeIndex1(6),
                                            chCodeIndex0(7)
                                            } (SIZE(8))             OPTIONAL,
    subchannelSize                      CHOICE {
        size1                               NULL,
        size2                               SEQUENCE {
            -- subch0 means bitstring '01' in the tabular, subch1 means bitsring '10'
            subchannels                         ENUMERATED  { subch0, subch1 }  OPTIONAL
        },
        size4                               SEQUENCE {
            subchannels                         BIT STRING  {
                                                    subCh3(0),
                                                    subCh2(1),
                                                    subCh1(2),
                                                    subCh0(3)
                                                    } (SIZE(4))     OPTIONAL
        },
        size8                               SEQUENCE {
            subchannels                         BIT STRING  {
                                                    subCh7(0),
                                                    subCh6(1),
                                                    subCh5(2),
                                                    subCh4(3),
                                                    subCh3(4),
                                                    subCh2(5),
                                                    subCh1(6),
                                                    subCh0(7)
                                                    } (SIZE(8))     OPTIONAL
        }
    }
}

AccessServiceClass-TDD-r7 ::=           SEQUENCE {
    channelisationCodeIndices           BIT STRING  {
                                            chCodeIndex15(0),
                                            chCodeIndex14(1),
                                            chCodeIndex13(2),
                                            chCodeIndex12(3),
                                            chCodeIndex11(4),
                                            chCodeIndex10(5),
                                            chCodeIndex9(6),
                                            chCodeIndex8(7),
                                            chCodeIndex7(8),
                                            chCodeIndex6(9),
                                            chCodeIndex5(10),
                                            chCodeIndex4(11),
                                            chCodeIndex3(12),
                                            chCodeIndex2(13),
                                            chCodeIndex1(14),
                                            chCodeIndex0(15)
                                            } (SIZE(16))                OPTIONAL,
    subchannelSize                      CHOICE {
        size1                               NULL,
        size2                               SEQUENCE {
            -- subch0 means bitstring '01' in the tabular, subch1 means bitsring '10'
            subchannels                         ENUMERATED  { subch0, subch1 }  OPTIONAL
        },
        size4                               SEQUENCE {
            subchannels                         BIT STRING  {
                                                    subCh3(0),
                                                    subCh2(1),
                                                    subCh1(2),
```

```
                                                subCh0(3)
                                                } (SIZE(4))     OPTIONAL
        },
        size8                               SEQUENCE {
            subchannels                         BIT STRING  {
                                                    subCh7(0),
                                                    subCh6(1),
                                                    subCh5(2),
                                                    subCh4(3),
                                                    subCh3(4),
                                                    subCh2(5),
                                                    subCh1(6),
                                                    subCh0(7)
                                                    } (SIZE(8))     OPTIONAL
        },
        size16                              SEQUENCE {
            subchannels                         BIT STRING  {
                                                    subCh15(0),
                                                    subCh14(1),
                                                    subCh13(2),
                                                    subCh12(3),
                                                    subCh11(4),
                                                    subCh10(5),
                                                    subCh9(6),
                                                    subCh8(7),
                                                    subCh7(8),
                                                    subCh6(9),
                                                    subCh5(10),
                                                    subCh4(11),
                                                    subCh3(12),
                                                    subCh2(13),
                                                    subCh1(14),
                                                    subCh0(15)
                                                    } (SIZE(16))        OPTIONAL
        }
    }
}

AccessServiceClass-TDD-LCR-r4 ::=   SEQUENCE {
    availableSYNC-UlCodesIndics         BIT STRING {
                                            sulCodeIndex7(0),
                                            sulCodeIndex6(1),
                                            sulCodeIndex5(2),
                                            sulCodeIndex4(3),
                                            sulCodeIndex3(4),
                                            sulCodeIndex2(5),
                                            sulCodeIndex1(6),
                                            sulCodeIndex0(7)
                                            } (SIZE(8))               OPTIONAL,
    subchannelSize                      CHOICE {
        size1                               NULL,
        size2                               SEQUENCE {
            -- subch0 means bitstring '01' in the tabular, subch1 means bitsring '10'.
            subchannels                         ENUMERATED  { subch0, subch1 }  OPTIONAL
        },
        size4                               SEQUENCE {
            subchannels                         BIT STRING  {
                                                    subCh3(0),
                                                    subCh2(1),
                                                    subCh1(2),
                                                    subCh0(3)
                                                    } (SIZE(4))         OPTIONAL
        },
        size8                               SEQUENCE {
            subchannels                         BIT STRING  {
                                                    subCh7(0),
                                                    subCh6(1),
                                                    subCh5(2),
                                                    subCh4(3),
                                                    subCh3(4),
                                                    subCh2(5),
                                                    subCh1(6),
                                                    subCh0(7)
                                                    } (SIZE(8))         OPTIONAL
        }
    }

}
```

```
AdditionalPRACH-TF-and-TFCS-CCCH-IEs ::= SEQUENCE {
    powerOffsetInformation              PowerOffsetInformation,
    dynamicTFInformationCCCH            DynamicTFInformationCCCH
}

AdditionalPRACH-TF-and-TFCS-CCCH ::=    SEQUENCE {
    additionalPRACH-TF-and-TFCS-CCCH-IEs    AdditionalPRACH-TF-and-TFCS-CCCH-IEs    OPTIONAL
}

-- The order is the same as in the PRACH-SystemInformationList
AdditionalPRACH-TF-and-TFCS-CCCH-List ::=   SEQUENCE (SIZE (1..maxPRACH)) OF
                                        AdditionalPRACH-TF-and-TFCS-CCCH

AICH-Info ::=                       SEQUENCE {
    channelisationCode256               ChannelisationCode256,
    sttd-Indicator                      BOOLEAN,
    aich-TransmissionTiming             AICH-TransmissionTiming
}

AICH-PowerOffset ::=                INTEGER (-22..5)

AICH-TransmissionTiming ::=         ENUMERATED {
                                        e0, e1 }

AllocationPeriodInfo ::=            SEQUENCE {
    allocationActivationTime            INTEGER (0..255),
    allocationDuration                  INTEGER (1..256)
}

-- Actual value Alpha = IE value * 0.125
Alpha ::=                           INTEGER (0..8)

AP-AICH-ChannelisationCode ::=      INTEGER (0..255)

AP-PreambleScramblingCode ::=       INTEGER (0..79)

AP-Signature ::=                    INTEGER (0..15)

AP-Signature-VCAM ::=               SEQUENCE {
    ap-Signature                        AP-Signature,
    availableAP-SubchannelList          AvailableAP-SubchannelList OPTIONAL
}

AP-Subchannel ::=                   INTEGER (0..11)

ASCSetting-FDD ::=                      SEQUENCE {
    -- TABULAR: accessServiceClass-FDD is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available signature and sub-channels
    accessServiceClass-FDD                  AccessServiceClass-FDD  OPTIONAL
}

ASCSetting-TDD ::=                      SEQUENCE {
    -- TABULAR: accessServiceClass-TDD is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available channelisation codes and
    -- all available sub-channels with subchannelSize=size1.
    accessServiceClass-TDD                  AccessServiceClass-TDD  OPTIONAL
}

ASCSetting-TDD-r7 ::=                       SEQUENCE {
    -- TABULAR: accessServiceClass-TDD is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available channelisation codes and
    -- all available sub-channels with subchannelSize=size1.
    accessServiceClass-TDD                      AccessServiceClass-TDD-r7   OPTIONAL
}

ASCSetting-TDD-LCR-r4 ::=                       SEQUENCE {
    -- TABULAR: accessServiceClass-TDD-LCR is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available SYNC_UL codes and
    -- all available sub-channels with subchannelSize=size1.
    accessServiceClass-TDD-LCR                  AccessServiceClass-TDD-LCR-r4   OPTIONAL
}

AvailableAP-Signature-VCAMList ::=  SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
```

```
                                    AP-Signature-VCAM

AvailableAP-SignatureList ::=       SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
                                    AP-Signature

AvailableAP-SubchannelList ::=      SEQUENCE (SIZE (1..maxPCPCH-APsubCh)) OF
                                    AP-Subchannel

AvailableMinimumSF-ListVCAM ::=     SEQUENCE (SIZE (1..maxPCPCH-SF)) OF
                                    AvailableMinimumSF-VCAM

AvailableMinimumSF-VCAM ::=         SEQUENCE {
    minimumSpreadingFactor              MinimumSpreadingFactor,
    nf-Max                              NF-Max,
    maxAvailablePCPCH-Number            MaxAvailablePCPCH-Number,
    availableAP-Signature-VCAMList      AvailableAP-Signature-VCAMList
}

AvailableSignatures ::=         BIT STRING {
                                    signature15(0),
                                    signature14(1),
                                    signature13(2),
                                    signature12(3),
                                    signature11(4),
                                    signature10(5),
                                    signature9(6),
                                    signature8(7),
                                    signature7(8),
                                    signature6(9),
                                    signature5(10),
                                    signature4(11),
                                    signature3(12),
                                    signature2(13),
                                    signature1(14),
                                    signature0(15)
                                    }    (SIZE(16))

AvailableSubChannelNumbers ::=      BIT STRING {
                                    subCh11(0),
                                    subCh10(1),
                                    subCh9(2),
                                    subCh8(3),
                                    subCh7(4),
                                    subCh6(5),
                                    subCh5(6),
                                    subCh4(7),
                                    subCh3(8),
                                    subCh2(9),
                                    subCh1(10),
                                    subCh0(11)
                                    }    (SIZE(12))

BEACON-PL-Est ::=                   ENUMERATED { true }

BurstType ::=                       ENUMERATED {
                                    type1, type2 }

-- Actual value Bler-Target = IE value * 0.05
Bler-Target ::=                     INTEGER (-63..0)

CCTrCH-PowerControlInfo ::=         SEQUENCE {
    tfcs-Identity                       TFCS-Identity                       OPTIONAL,
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo
}

CCTrCH-PowerControlInfo-r4 ::=      SEQUENCE {
    tfcs-Identity                       TFCS-Identity                       OPTIONAL,
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo-r4
}

CCTrCH-PowerControlInfo-r5 ::=      SEQUENCE {
    tfcs-Identity                       TFCS-Identity                       OPTIONAL,
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo-r5
}

CCTrCH-PowerControlInfo-r7 ::=      SEQUENCE {
    tfcs-Identity                       TFCS-Identity                       OPTIONAL,
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo-r7
```

```
}

CD-AccessSlotSubchannel ::=         INTEGER (0..11)

CD-AccessSlotSubchannelList ::=     SEQUENCE (SIZE (1..maxPCPCH-CDsubCh)) OF
                                        CD-AccessSlotSubchannel

CD-CA-ICH-ChannelisationCode ::=    INTEGER (0..255)

CD-PreambleScramblingCode ::=       INTEGER (0..79)

CD-SignatureCode ::=                INTEGER (0..15)

CD-SignatureCodeList ::=            SEQUENCE (SIZE (1..maxPCPCH-CDsig)) OF
                                        CD-SignatureCode

CellAndChannelIdentity ::=          SEQUENCE {
    -- burstType may be set to either value and should be ignored by the receiver for 1.28 Mcps TDD.
    burstType                           BurstType,
    midambleShift                       MidambleShiftLong,
    timeslot                            TimeslotNumber,
    cellParametersID                    CellParametersID
    }

CellParametersID ::=                INTEGER (0..127)

Cfntargetsfnframeoffset ::=             INTEGER(0..255)

ChannelAssignmentActive ::=         CHOICE {
    notActive                           NULL,
    isActive                            AvailableMinimumSF-ListVCAM
}

ChannelisationCode256 ::=           INTEGER (0..255)

ChannelReqParamsForUCSM ::=         SEQUENCE {
    availableAP-SignatureList           AvailableAP-SignatureList,
    availableAP-SubchannelList          AvailableAP-SubchannelList          OPTIONAL
}

ClosedLoopTimingAdjMode ::=         ENUMERATED {
                                        slot1, slot2 }

CodeNumberDSCH ::=                  INTEGER (0..255)

CodeRange ::=                       SEQUENCE {
    pdsch-CodeMapList                   PDSCH-CodeMapList
}

CodeWordSet ::=                     ENUMERATED {
                                        longCWS,
                                        mediumCWS,
                                        shortCWS,
                                        ssdtOff }

CommonTimeslotInfo ::=              SEQUENCE {
    -- TABULAR: secondInterleavingMode is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode              SecondInterleavingMode,
    tfci-Coding                         TFCI-Coding                         OPTIONAL,
    puncturingLimit                     PuncturingLimit,
    repetitionPeriodAndLength           RepetitionPeriodAndLength           OPTIONAL
}

CommonTimeslotInfoMBMS ::=          SEQUENCE {
    -- TABULAR: secondInterleavingMode is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode              SecondInterleavingMode,
    tfci-Coding                         TFCI-Coding                         OPTIONAL,
    puncturingLimit                     PuncturingLimit
}

CommonTimeslotInfoSCCPCH ::=        SEQUENCE {
    -- TABULAR: secondInterleavingMode is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode              SecondInterleavingMode,
    tfci-Coding                         TFCI-Coding                         OPTIONAL,
    puncturingLimit                     PuncturingLimit,
```

```
    repetitionPeriodLengthAndOffset     RepetitionPeriodLengthAndOffset     OPTIONAL
}

ConstantValue ::=                   INTEGER (-35..-10)

ConstantValueTdd ::=                INTEGER (-35..10)

CPCH-PersistenceLevels ::=          SEQUENCE {
    cpch-SetID                          CPCH-SetID,
    dynamicPersistenceLevelTF-List      DynamicPersistenceLevelTF-List
}

CPCH-PersistenceLevelsList ::=      SEQUENCE (SIZE (1..maxCPCHsets)) OF
                                        CPCH-PersistenceLevels

CPCH-SetInfo ::=                    SEQUENCE {
    cpch-SetID                          CPCH-SetID,
    transportFormatSet                  TransportFormatSet,
    tfcs                                TFCS,
    ap-PreambleScramblingCode           AP-PreambleScramblingCode,
    ap-AICH-ChannelisationCode          AP-AICH-ChannelisationCode,
    cd-PreambleScramblingCode           CD-PreambleScramblingCode,
    cd-CA-ICH-ChannelisationCode        CD-CA-ICH-ChannelisationCode,
    cd-AccessSlotSubchannelList         CD-AccessSlotSubchannelList         OPTIONAL,
    cd-SignatureCodeList                CD-SignatureCodeList                OPTIONAL,
    deltaPp-m                           DeltaPp-m,
    ul-DPCCH-SlotFormat                 UL-DPCCH-SlotFormat,
    n-StartMessage                      N-StartMessage,
    n-EOT                               N-EOT,
    -- TABULAR: VCAM info has been nested inside ChannelAssignmentActive,
    -- which in turn is mandatory since it's only a binary choice.
    channelAssignmentActive             ChannelAssignmentActive,
    cpch-StatusIndicationMode           CPCH-StatusIndicationMode,
    pcpch-ChannelInfoList               PCPCH-ChannelInfoList
}

CPCH-SetInfoList ::=                SEQUENCE (SIZE (1..maxCPCHsets)) OF
                                        CPCH-SetInfo

CPCH-StatusIndicationMode ::=       ENUMERATED {
                                        pa-mode,
                                        pamsf-mode }

CQI-RepetitionFactor ::=            INTEGER(1..4)

CSICH-PowerOffset ::=               INTEGER (-10..5)

-- DefaultDPCH-OffsetValueFDD and DefaultDPCH-OffsetValueTDD corresponds to
-- IE "Default DPCH Offset Value" depending on the mode.
-- Actual value DefaultDPCH-OffsetValueFDD = IE value * 512
DefaultDPCH-OffsetValueFDD ::=      INTEGER (0..599)

DefaultDPCH-OffsetValueTDD ::=      INTEGER (0..7)

DeltaPp-m ::=                       INTEGER (-10..10)

DeltaCQI ::=                        INTEGER (0..8)

DeltaNACK ::=                       INTEGER (0..8)

DeltaACK ::=                        INTEGER (0..8)

-- Actual value DeltaSIR = IE value * 0.1
DeltaSIR ::=                        INTEGER (0..30)

DHS-Sync ::=                        INTEGER (-20..10)

DL-CCTrCh ::=                       SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    timeInfo                            TimeInfo,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    dl-CCTrCH-TimeslotsCodes            DownlinkTimeslotsCodes              OPTIONAL,
    ul-CCTrChTPCList                    UL-CCTrChTPCList                    OPTIONAL
}

DL-CCTrCh-r4 ::=                    SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    timeInfo                            TimeInfo,
```

```
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    tddOption                           CHOICE {
        tdd384                              SEQUENCE {
            dl-CCTrCH-TimeslotsCodes            DownlinkTimeslotsCodes  OPTIONAL
        },
        tdd128                              SEQUENCE {
            dl-CCTrCH-TimeslotsCodes            DownlinkTimeslotsCodes-LCR-r4   OPTIONAL
        }
    },
    ul-CCTrChTPCList                    UL-CCTrChTPCList        OPTIONAL
}

DL-CCTrCh-r7 ::=                    SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    timeInfo                            TimeInfo,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    tddOption                           CHOICE {
        tdd384                              SEQUENCE {
            dl-CCTrCH-TimeslotsCodes            DownlinkTimeslotsCodes  OPTIONAL
        },
        tdd768                              SEQUENCE {
            dl-CCTrCH-TimeslotsCodes            DownlinkTimeslotsCodes-VHCR     OPTIONAL
        },
        tdd128                              SEQUENCE {
            dl-CCTrCH-TimeslotsCodes            DownlinkTimeslotsCodes-LCR-r4   OPTIONAL
        }
    },
    ul-CCTrChTPCList                    UL-CCTrChTPCList        OPTIONAL
}

DL-CCTrChList ::=                   SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        DL-CCTrCh

DL-CCTrChList-r7 ::=                SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        DL-CCTrCh-r7

DL-CCTrChList-r4 ::=                SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        DL-CCTrCh-r4

DL-CCTrChListToRemove ::=           SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        TFCS-IdentityPlain

DL-CCTrChTPCList ::=                SEQUENCE (SIZE (0..maxCCTrCH)) OF
                                            TFCS-Identity

DL-ChannelisationCode ::=           SEQUENCE {
    secondaryScramblingCode             SecondaryScramblingCode             OPTIONAL,
    sf-AndCodeNumber                    SF512-AndCodeNumber,
    scramblingCodeChange                ScramblingCodeChange                OPTIONAL
}

DL-ChannelisationCodeList ::=       SEQUENCE (SIZE (1..maxDPCH-DLchan)) OF
                                        DL-ChannelisationCode

DL-CommonInformation ::=            SEQUENCE {
    dl-DPCH-InfoCommon                  DL-DPCH-InfoCommon          OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueFDD  OPTIONAL,
            dpch-CompressedModeInfo             DPCH-CompressedModeInfo     OPTIONAL,
            tx-DiversityMode                    TX-DiversityMode            OPTIONAL,
            -- dummy is not used in this version of the specification, it should
            -- not be sent and if received it should be ignored.
            dummy                               SSDT-Information            OPTIONAL
        },
        tdd                                 SEQUENCE {
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueTDD  OPTIONAL
        }
    }
}

DL-CommonInformation-r4 ::=         SEQUENCE {
    dl-DPCH-InfoCommon                  DL-DPCH-InfoCommon-r4       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueFDD  OPTIONAL,
            dpch-CompressedModeInfo             DPCH-CompressedModeInfo     OPTIONAL,
            tx-DiversityMode                    TX-DiversityMode            OPTIONAL,
```

```
            -- dummy is not used in this version of the specification, it should
            -- not be sent and if received it should be ignored.
            dummy                               SSDT-Information-r4         OPTIONAL
        },
        tdd                                 SEQUENCE {
            tddOption                           CHOICE {
                tdd384                              NULL,
                tdd128                              SEQUENCE {
                    tstd-Indicator                      BOOLEAN
                }
            },
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueTDD  OPTIONAL
        }
    }
}


DL-CommonInformation-r5 ::=         SEQUENCE {
    dl-DPCH-InfoCommon                  DL-DPCH-InfoCommon-r4           OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueFDD  OPTIONAL,
            dpch-CompressedModeInfo             DPCH-CompressedModeInfo     OPTIONAL,
            tx-DiversityMode                    TX-DiversityMode            OPTIONAL,
            -- dummy is not used in this version of the specification, it should
            -- not be sent and if received it should be ignored.
            dummy                               SSDT-Information-r4         OPTIONAL
        },
        tdd                                 SEQUENCE {
            tddOption                           CHOICE {
                tdd384                              NULL,
                tdd128                              SEQUENCE {
                    tstd-Indicator                      BOOLEAN
                }
            },
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueTDD  OPTIONAL
        }
    },
    mac-hsResetIndicator                ENUMERATED { true }         OPTIONAL
}

DL-CommonInformation-r6 ::=         SEQUENCE {
    dl-dpchInfoCommon                   CHOICE {
        dl-DPCH-InfoCommon                  DL-DPCH-InfoCommon-r6,
        dl-FDPCH-InfoCommon                 DL-FDPCH-InfoCommon-r6
    }                                                                       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueFDD  OPTIONAL,
            dpch-CompressedModeInfo             DPCH-CompressedModeInfo     OPTIONAL,
            tx-DiversityMode                    TX-DiversityMode            OPTIONAL
        },
        tdd                                 SEQUENCE {
            tddOption                           CHOICE {
                tdd384                              NULL,
                tdd128                              SEQUENCE {
                    tstd-Indicator                      BOOLEAN
                }
            },
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueTDD  OPTIONAL
        }
    },
    mac-hsResetIndicator                ENUMERATED { true }         OPTIONAL,
    postVerificationPeriod              ENUMERATED { true }         OPTIONAL
}

DL-CommonInformation-r7 ::=         SEQUENCE {
    dl-dpchInfoCommon                   CHOICE {
        dl-DPCH-InfoCommon                  DL-DPCH-InfoCommon-r6,
        dl-FDPCH-InfoCommon                 DL-FDPCH-InfoCommon-r6
    }                                                                       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueFDD  OPTIONAL,
            dpch-CompressedModeInfo             DPCH-CompressedModeInfo     OPTIONAL,
            tx-DiversityMode                    TX-DiversityMode            OPTIONAL
        },
        tdd                                 SEQUENCE {
```

```
            tddOption                           CHOICE {
                tdd384                              NULL,
                tdd768                              NULL,
                tdd128                              SEQUENCE {
                    tstd-Indicator                      BOOLEAN
                }
            },
            defaultDPCH-OffsetValue             DefaultDPCH-OffsetValueTDD  OPTIONAL
        }
    },
    mac-hsResetIndicator                ENUMERATED { true }         OPTIONAL,
    postVerificationPeriod              ENUMERATED { true }         OPTIONAL
}

DL-CommonInformationPost ::=        SEQUENCE {
    dl-DPCH-InfoCommon                  DL-DPCH-InfoCommonPost
}

DL-CommonInformationPredef ::=      SEQUENCE {
    dl-DPCH-InfoCommon                  DL-DPCH-InfoCommonPredef    OPTIONAL
}

DL-CompressedModeMethod ::=         ENUMERATED {
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received the UE behaviour is not specified.
                                        dummy, sf-2,
                                        higherLayerScheduling }

DL-DPCH-InfoCommon ::=              SEQUENCE {
    cfnHandling                         CHOICE {
        maintain                            NULL,
        initialise                          SEQUENCE {
            -- IE dummy is not used in this version of the specification
            -- The IE should not be sent and if received it should be ignored
            dummy                               Cfntargetsfnframeoffset             OPTIONAL
        }
    },
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            dl-DPCH-PowerControlInfo            DL-DPCH-PowerControlInfo            OPTIONAL,
            powerOffsetPilot-pdpdch             PowerOffsetPilot-pdpdch,
            dl-rate-matching-restriction        Dl-rate-matching-restriction        OPTIONAL,
            -- TABULAR: The number of pilot bits is nested inside the spreading factor.
            spreadingFactorAndPilot             SF512-AndPilot,
            positionFixedOrFlexible             PositionFixedOrFlexible,
            tfci-Existence                      BOOLEAN
        },
        tdd                                 SEQUENCE {
            dl-DPCH-PowerControlInfo            DL-DPCH-PowerControlInfo            OPTIONAL
        }
    }
}

DL-DPCH-InfoCommon-r4 ::=           SEQUENCE {
    cfnHandling                         CHOICE {
        maintain                            NULL,
        initialise                          SEQUENCE {
            -- IE dummy is not used in this version of the specification
            -- The IE should not be sent and if received it should be ignored
            dummy                               Cfntargetsfnframeoffset             OPTIONAL
        }
    },
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            dl-DPCH-PowerControlInfo            DL-DPCH-PowerControlInfo            OPTIONAL,
            powerOffsetPilot-pdpdch             PowerOffsetPilot-pdpdch,
            dl-rate-matching-restriction        Dl-rate-matching-restriction        OPTIONAL,
            -- TABULAR: The number of pilot bits is nested inside the spreading factor.
            spreadingFactorAndPilot             SF512-AndPilot,
            positionFixedOrFlexible             PositionFixedOrFlexible,
            tfci-Existence                      BOOLEAN
        },
        tdd                                 SEQUENCE {
            dl-DPCH-PowerControlInfo            DL-DPCH-PowerControlInfo            OPTIONAL
        }
    },
-- The IE mac-d-HFN-initial-value should be absent in the RRCConnectionSetup-r4-IEs or
-- RRCConnectionSetup-r5-IEs or HandoverToUTRANCommand-r4-IEs or HandoverToUTRANCommand-r5-IEs and
```

```
-- if the IE is included, the general error handling for conditional IEs applies.
    mac-d-HFN-initial-value             MAC-d-HFN-initial-value             OPTIONAL

}

DL-DPCH-InfoCommon-r6 ::=               SEQUENCE {
    cfnHandling                             CHOICE {
        maintain                                SEQUENCE {
            timingmaintainedsynchind                TimingMaintainedSynchInd            OPTIONAL
        },
        initialise                              NULL
    },
    modeSpecificInfo                        CHOICE {
        fdd                                     SEQUENCE {
            dl-DPCH-PowerControlInfo                DL-DPCH-PowerControlInfo            OPTIONAL,
            powerOffsetPilot-pdpdch                 PowerOffsetPilot-pdpdch,
            dl-rate-matching-restriction            Dl-rate-matching-restriction        OPTIONAL,
            -- TABULAR: The number of pilot bits is nested inside the spreading factor.
            spreadingFactorAndPilot                 SF512-AndPilot,
            positionFixedOrFlexible                 PositionFixedOrFlexible,
            tfci-Existence                          BOOLEAN
        },
        tdd                                     SEQUENCE {
            dl-DPCH-PowerControlInfo            DL-DPCH-PowerControlInfo            OPTIONAL
        }
    },
    -- The IE mac-d-HFN-initial-value should be absent in the RRCConnectionSetup and the
    -- HandoverToUTRANCommand messages. If the IE is included, the general error handling
    -- for conditional IEs applies.
    mac-d-HFN-initial-value             MAC-d-HFN-initial-value             OPTIONAL
}

DL-DPCH-InfoCommonPost ::=          SEQUENCE {
    dl-DPCH-PowerControlInfo            DL-DPCH-PowerControlInfo                OPTIONAL
}

DL-DPCH-InfoCommonPredef ::=        SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            -- TABULAR: The number of pilot bits is nested inside the spreading factor.
            spreadingFactorAndPilot             SF512-AndPilot,
            positionFixedOrFlexible             PositionFixedOrFlexible,
            tfci-Existence                      BOOLEAN
        },
        tdd                                 SEQUENCE {
            commonTimeslotInfo                  CommonTimeslotInfo
        }
    }
}

DL-DPCH-InfoPerRL ::=               CHOICE {
    fdd                                 SEQUENCE {
        pCPICH-UsageForChannelEst           PCPICH-UsageForChannelEst,
        dpch-FrameOffset                    DPCH-FrameOffset,
        secondaryCPICH-Info                 SecondaryCPICH-Info             OPTIONAL,
        dl-ChannelisationCodeList           DL-ChannelisationCodeList,
        tpc-CombinationIndex                TPC-CombinationIndex,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                               SSDT-CellIdentity               OPTIONAL,
        closedLoopTimingAdjMode             ClosedLoopTimingAdjMode         OPTIONAL
    },
    tdd                                 SEQUENCE {
        dl-CCTrChListToEstablish            DL-CCTrChList                   OPTIONAL,
        dl-CCTrChListToRemove               DL-CCTrChListToRemove           OPTIONAL
    }
}

DL-DPCH-InfoPerRL-r4 ::=            CHOICE {
    fdd                                 SEQUENCE {
        pCPICH-UsageForChannelEst           PCPICH-UsageForChannelEst,
        dpch-FrameOffset                    DPCH-FrameOffset,
        secondaryCPICH-Info                 SecondaryCPICH-Info             OPTIONAL,
        dl-ChannelisationCodeList           DL-ChannelisationCodeList,
        tpc-CombinationIndex                TPC-CombinationIndex,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                               SSDT-CellIdentity               OPTIONAL,
```

```
        closedLoopTimingAdjMode             ClosedLoopTimingAdjMode         OPTIONAL
    },
    tdd                                 SEQUENCE {
        dl-CCTrChListToEstablish            DL-CCTrChList-r4                OPTIONAL,
        dl-CCTrChListToRemove               DL-CCTrChListToRemove           OPTIONAL
    }
}

DL-DPCH-InfoPerRL-r5 ::=            CHOICE {
    fdd                                 SEQUENCE {
        pCPICH-UsageForChannelEst           PCPICH-UsageForChannelEst,
        dpch-FrameOffset                    DPCH-FrameOffset,
        secondaryCPICH-Info                 SecondaryCPICH-Info             OPTIONAL,
        dl-ChannelisationCodeList           DL-ChannelisationCodeList,
        tpc-CombinationIndex                TPC-CombinationIndex,
        powerOffsetTPC-pdpdch               PowerOffsetTPC-pdpdch           OPTIONAL,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                               SSDT-CellIdentity               OPTIONAL,
        closedLoopTimingAdjMode             ClosedLoopTimingAdjMode         OPTIONAL
    },
    tdd                                 SEQUENCE {
        dl-CCTrChListToEstablish            DL-CCTrChList-r4                OPTIONAL,
        dl-CCTrChListToRemove               DL-CCTrChListToRemove           OPTIONAL
    }
}

DL-DPCH-InfoPerRL-r6 ::=            CHOICE {
    fdd                                 SEQUENCE {
        pCPICH-UsageForChannelEst           PCPICH-UsageForChannelEst,
        dpch-FrameOffset                    DPCH-FrameOffset,
        secondaryCPICH-Info                 SecondaryCPICH-Info             OPTIONAL,
        dl-ChannelisationCodeList           DL-ChannelisationCodeList,
        tpc-CombinationIndex                TPC-CombinationIndex,
        powerOffsetTPC-pdpdch               PowerOffsetTPC-pdpdch           OPTIONAL,
        closedLoopTimingAdjMode             ClosedLoopTimingAdjMode         OPTIONAL
    },
    tdd                                 SEQUENCE {
        dl-CCTrChListToEstablish            DL-CCTrChList-r4                OPTIONAL,
        dl-CCTrChListToRemove               DL-CCTrChListToRemove           OPTIONAL
    }
}

DL-DPCH-InfoPerRL-r7 ::=            CHOICE {
    fdd                                 SEQUENCE {
        pCPICH-UsageForChannelEst           PCPICH-UsageForChannelEst,
        dpch-FrameOffset                    DPCH-FrameOffset,
        secondaryCPICH-Info                 SecondaryCPICH-Info             OPTIONAL,
        dl-ChannelisationCodeList           DL-ChannelisationCodeList,
        tpc-CombinationIndex                TPC-CombinationIndex,
        sttdIndication                      STTDIndication                  OPTIONAL,
        powerOffsetTPC-pdpdch               PowerOffsetTPC-pdpdch           OPTIONAL,
        closedLoopTimingAdjMode             ClosedLoopTimingAdjMode         OPTIONAL
    },
    tdd                                 SEQUENCE {
        dl-CCTrChListToEstablish            DL-CCTrChList-r7                OPTIONAL,
        dl-CCTrChListToRemove               DL-CCTrChListToRemove           OPTIONAL
    }
}

DL-FDPCH-InfoPerRL-r6 ::=           SEQUENCE {
    pCPICH-UsageForChannelEst           PCPICH-UsageForChannelEst,
    fdpch-FrameOffset                   DPCH-FrameOffset,
    secondaryCPICH-Info                 SecondaryCPICH-Info             OPTIONAL,
    secondaryScramblingCode             SecondaryScramblingCode         OPTIONAL,
    dl-ChannelisationCode               INTEGER (0..255),
    tpc-CombinationIndex                TPC-CombinationIndex
}

DL-DPCH-InfoPerRL-PostFDD ::=                           SEQUENCE {
        pCPICH-UsageForChannelEst               PCPICH-UsageForChannelEst,
        dl-ChannelisationCode                   DL-ChannelisationCode,
        tpc-CombinationIndex                    TPC-CombinationIndex
}

DL-DPCH-InfoPerRL-PostTDD ::=               SEQUENCE {
    dl-DPCH-TimeslotsCodes                      DownlinkTimeslotsCodes
}
```

```
DL-DPCH-InfoPerRL-PostTDD-LCR-r4 ::=        SEQUENCE {
    dl-CCTrCH-TimeslotsCodes                    DownlinkTimeslotsCodes-LCR-r4
}

DL-DPCH-PowerControlInfo ::=            SEQUENCE {
    modeSpecificInfo                        CHOICE {
        fdd                                     SEQUENCE {
            dpc-Mode                                DPC-Mode
        },
        tdd                                     SEQUENCE {
            tpc-StepSizeTDD                         TPC-StepSizeTDD         OPTIONAL
        }
    }
}

DL-FDPCH-InfoCommon-r6 ::=          SEQUENCE {
    cfnHandling                         CHOICE {
        maintain                            SEQUENCE {
            timingmaintainedsynchind            TimingMaintainedSynchInd            OPTIONAL
        },
        initialise                          NULL
    },
    dl-FDPCH-PowerControlInfo           DL-DPCH-PowerControlInfo            OPTIONAL,
-- Actual value dl-FDPCH-TPCcommandErrorRate = IE value * 0.01
-- dl-FDPCH-TPCcommandErrorRate values 11..16 are spare and shall not be used in this version of
-- the protocol
    dl-FDPCH-TPCcommandErrorRate        INTEGER (1..16)     OPTIONAL
}

DL-FrameType ::=                    ENUMERATED {
                                        dl-FrameTypeA, dl-FrameTypeB }

DL-HSPDSCH-Information ::=          SEQUENCE {
    hs-scch-Info                    HS-SCCH-Info    OPTIONAL,
    measurement-feedback-Info       Measurement-Feedback-Info   OPTIONAL,
    modeSpecificInfo                CHOICE {
    tdd                             CHOICE{
            tdd384                          SEQUENCE {
                dl-HSPDSCH-TS-Configuration DL-HSPDSCH-TS-Configuration     OPTIONAL
            },
            tdd128                          SEQUENCE {
                hs-PDSCH-Midamble-Configuration-tdd128
                        HS-PDSCH-Midamble-Configuration-TDD128              OPTIONAL
            }
        },
        fdd                         NULL
    }
}

DL-HSPDSCH-Information-r6 ::=   SEQUENCE {
    hs-scch-Info                        HS-SCCH-Info-r6                         OPTIONAL,
    measurement-feedback-Info           Measurement-Feedback-Info               OPTIONAL,
    modeSpecificInfo                    CHOICE {
        tdd                                 CHOICE {
            tdd384                              SEQUENCE {
                dl-HSPDSCH-TS-Configuration     DL-HSPDSCH-TS-Configuration OPTIONAL
            },
            tdd128                              SEQUENCE {
                hs-PDSCH-Midamble-Configuration-tdd128
                        HS-PDSCH-Midamble-Configuration-TDD128              OPTIONAL
            }
        },
        fdd                             NULL
    }
}

DL-HSPDSCH-Information-r7 ::=   SEQUENCE {
    hs-scch-Info                        HS-SCCH-Info-r7                         OPTIONAL,
    measurement-feedback-Info           Measurement-Feedback-Info               OPTIONAL,
    modeSpecificInfo                    CHOICE {
        tdd                                 CHOICE {
            tdd384                              SEQUENCE {
                dl-HSPDSCH-TS-Configuration     DL-HSPDSCH-TS-Configuration OPTIONAL
            },
            tdd768                              SEQUENCE {
                dl-HSPDSCH-TS-Configuration     DL-HSPDSCH-TS-Configuration-VHCR    OPTIONAL
            },
```

```
            tdd128                          SEQUENCE {
                hs-PDSCH-Midamble-Configuration-tdd128
                        HS-PDSCH-Midamble-Configuration-TDD128                      OPTIONAL
            }
        },
        fdd                         NULL
    }
}

-- The IE 'DL-HSPDSCH-TS-Configuration' applies to tdd-384 REL-5 onward
DL-HSPDSCH-TS-Configuration ::=     SEQUENCE (SIZE (1..maxTS-1)) OF
                                        SEQUENCE {
    timeslot                            TimeslotNumber,
    midambleShiftAndBurstType           MidambleShiftAndBurstType-DL
}

-- The IE 'DL-HSPDSCH-TS-Configuration-VHCR' applies to tdd-768 REL-7 onward
DL-HSPDSCH-TS-Configuration-VHCR ::= SEQUENCE (SIZE (1..maxTS-1)) OF
                                        SEQUENCE {
    timeslot                            TimeslotNumber,
    midambleShiftAndBurstType           MidambleShiftAndBurstType-DL-VHCR
}

DL-InformationPerRL ::=             SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            -- dummy1 and dummy 2 are not used in this version of specification, they should
            -- not be sent and if received they should be ignored.
            dummy1                              PDSCH-SHO-DCH-Info          OPTIONAL,
            dummy2                              PDSCH-CodeMapping           OPTIONAL
        },
        tdd                                 PrimaryCCPCH-Info
    },
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL                   OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                               SCCPCH-InfoForFACH                  OPTIONAL
}

DL-InformationPerRL-r4 ::=          SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            -- dummy1 and dummy 2 are not used in this version of specification, they should
            -- not be sent and if received they should be ignored.
            dummy1                              PDSCH-SHO-DCH-Info          OPTIONAL,
            dummy2                              PDSCH-CodeMapping           OPTIONAL
        },
        tdd                                 PrimaryCCPCH-Info-r4
    },
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-r4                OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                               SCCPCH-InfoForFACH-r4               OPTIONAL,
    cell-id                             CellIdentity                        OPTIONAL
}

DL-InformationPerRL-r5 ::=          SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            -- dummy1 and dummy 2 are not used in this version of specification, they should
            -- not be sent and if received they should be ignored.
            dummy1                              PDSCH-SHO-DCH-Info          OPTIONAL,
            dummy2                              PDSCH-CodeMapping           OPTIONAL,
            servingHSDSCH-RL-indicator          BOOLEAN
        },
        tdd                                 PrimaryCCPCH-Info-r4
    },
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-r5                OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                               SCCPCH-InfoForFACH-r4               OPTIONAL,
    cell-id                             CellIdentity                        OPTIONAL
}

DL-InformationPerRL-r5bis ::=       SEQUENCE {
```

```
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            -- dummy1 and dummy 2 are not used in this version of specification, they should
            -- not be sent and if received they should be ignored.
            dummy1                              PDSCH-SHO-DCH-Info          OPTIONAL,
            dummy2                              PDSCH-CodeMapping           OPTIONAL
        },
        tdd                                 PrimaryCCPCH-Info-r4
    },
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-r5                OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                               SCCPCH-InfoForFACH-r4               OPTIONAL,
    cell-id                             CellIdentity                        OPTIONAL
}

DL-InformationPerRL-r6 ::=          SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            servingHSDSCH-RL-indicator          BOOLEAN,
            servingEDCH-RL-indicator            BOOLEAN
        },
        tdd                                 PrimaryCCPCH-Info-r4
    },
    dl-dpchInfo                         CHOICE {
        dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-r6,
        dl-FDPCH-InfoPerRL                  DL-FDPCH-InfoPerRL-r6
    }                                                               OPTIONAL,
    e-AGCH-Information                  E-AGCH-Information          OPTIONAL,
    e-HICH-Info                         CHOICE  {
        e-HICH-Information                  E-HICH-Information,
        releaseIndicator                    NULL
    }   OPTIONAL,
    e-RGCH-Info                         CHOICE  {
        e-RGCH-Information                  E-RGCH-Information,
        releaseIndicator                    NULL
    }   OPTIONAL,
    cell-id                             CellIdentity                OPTIONAL
}

DL-InformationPerRL-v6b0ext ::=     SEQUENCE {
        sttdIndication                  STTDIndication              OPTIONAL
}

DL-InformationPerRL-r7 ::=          SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            servingHSDSCH-RL-indicator          BOOLEAN,
            servingEDCH-RL-indicator            BOOLEAN
        },
        tdd                                 PrimaryCCPCH-Info-r7
    },
    dl-dpchInfo                         CHOICE {
        dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-r7,
        dl-FDPCH-InfoPerRL                  DL-FDPCH-InfoPerRL-r6
    }                                                               OPTIONAL,
    e-AGCH-Information                  E-AGCH-Information-r7       OPTIONAL,
    modeSpecificInfo2                   CHOICE {
        fdd                                 SEQUENCE {
            e-HICH-Info                         CHOICE {
                e-HICH-Information                  E-HICH-Information,
                releaseIndicator                    NULL
            }   OPTIONAL,
            e-RGCH-Info                         CHOICE {
                e-RGCH-Information                  E-RGCH-Information,
                releaseIndicator                    NULL
            }   OPTIONAL
        },
        tdd                                 CHOICE {
            tdd384-tdd768                       SEQUENCE {
                e-HICH-Info                         E-HICH-Information-TDD384-768
                },
            tdd128                              NULL
        }
    },
```

```
    cell-id                             CellIdentity                        OPTIONAL
}

DL-InformationPerRL-List ::=        SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-InformationPerRL

DL-InformationPerRL-List-r4 ::=     SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-InformationPerRL-r4

DL-InformationPerRL-List-r5 ::=     SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-InformationPerRL-r5

DL-InformationPerRL-List-r6 ::=     SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-InformationPerRL-r6

DL-InformationPerRL-List-v6b0ext ::= SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-InformationPerRL-v6b0ext

DL-InformationPerRL-List-r5bis ::=      SEQUENCE (SIZE (1..maxRL)) OF
                                            DL-InformationPerRL-r5bis

DL-InformationPerRL-List-r7 ::=     SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-InformationPerRL-r7

DL-InformationPerRL-ListPostFDD ::= SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-InformationPerRL-PostFDD

DL-InformationPerRL-PostFDD ::=     SEQUENCE {
           primaryCPICH-Info                    PrimaryCPICH-Info,
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-PostFDD
}

DL-InformationPerRL-PostTDD ::=     SEQUENCE {
    primaryCCPCH-Info                   PrimaryCCPCH-InfoPost,
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-PostTDD
}

DL-InformationPerRL-PostTDD-LCR-r4 ::=  SEQUENCE {
    primaryCCPCH-Info                   PrimaryCCPCH-InfoPostTDD-LCR-r4,
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-PostTDD-LCR-r4
}

DL-PDSCH-Information ::=            SEQUENCE {
    -- dummy1 and dummy 2 are not used in this version of specification, it should
    -- not be sent and if received it should be ignored.
    dummy1                              PDSCH-SHO-DCH-Info                  OPTIONAL,
    dummy2                              PDSCH-CodeMapping                   OPTIONAL
}

Dl-rate-matching-restriction ::=    SEQUENCE {
    restrictedTrCH-InfoList             RestrictedTrCH-InfoList             OPTIONAL
}

DL-TPC-PowerOffsetPerRL ::=     SEQUENCE {
        powerOffsetTPC-pdpdch               PowerOffsetTPC-pdpdch           OPTIONAL
}

-- NOTE: The radio links in the following list have a one-to-one mapping with the
-- radio links in the message.
DL-TPC-PowerOffsetPerRL-List ::=    SEQUENCE (SIZE (1..maxRL)) OF
                                        DL-TPC-PowerOffsetPerRL

DL-TS-ChannelisationCode ::=        ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16 }

DL-TS-ChannelisationCode-VHCR ::=   ENUMERATED {
                                        cc32-1, cc32-2, cc32-3, cc32-4,
                                        cc132-5, cc32-6, cc32-7, cc32-8,
                                        cc32-9, cc32-10, cc32-11, cc32-12,
                                        cc32-13, cc32-14, cc32-15, cc32-16,
                                        cc32-17, cc32-18, cc32-19, cc32-20,
                                        cc32-21, cc32-22, cc32-23, cc32-24,
                                        cc32-25, cc32-26, cc32-27, cc32-28,
                                        cc32-29, cc32-30, cc32-31, cc32-32 }
```

```
DL-TS-ChannelisationCodesShort ::=  SEQUENCE {
    codesRepresentation                 CHOICE {
        consecutive                         SEQUENCE {
            firstChannelisationCode             DL-TS-ChannelisationCode,
            lastChannelisationCode              DL-TS-ChannelisationCode
        },
        bitmap                              BIT STRING {
                                                chCode16-SF16(0),
                                                chCode15-SF16(1),
                                                chCode14-SF16(2),
                                                chCode13-SF16(3),
                                                chCode12-SF16(4),
                                                chCode11-SF16(5),
                                                chCode10-SF16(6),
                                                chCode9-SF16(7),
                                                chCode8-SF16(8),
                                                chCode7-SF16(9),
                                                chCode6-SF16(10),
                                                chCode5-SF16(11),
                                                chCode4-SF16(12),
                                                chCode3-SF16(13),
                                                chCode2-SF16(14),
                                                chCode1-SF16(15)
                                                }   (SIZE (16))
    }
}

DL-TS-ChannelisationCodesShort-VHCR ::= SEQUENCE {
    codesRepresentation                 CHOICE {
        consecutive                         SEQUENCE {
            firstChannelisationCode             DL-TS-ChannelisationCode-VHCR,
            lastChannelisationCode              DL-TS-ChannelisationCode-VHCR
        },
        bitmap                              BIT STRING {
                                                chCode32-SF32(0),
                                                chCode31-SF32(1),
                                                chCode30-SF32(2),
                                                chCode29-SF32(3),
                                                chCode28-SF32(4),
                                                chCode27-SF32(5),
                                                chCode26-SF32(6),
                                                chCode25-SF32(7),
                                                chCode24-SF32(8),
                                                chCode23-SF32(9),
                                                chCode22-SF32(10),
                                                chCode21-SF32(11),
                                                chCode20-SF32(12),
                                                chCode19-SF32(13),
                                                chCode18-SF32(14),
                                                chCode17-SF32(15),
                                                chCode16-SF32(16),
                                                chCode15-SF32(17),
                                                chCode14-SF32(18),
                                                chCode13-SF32(19),
                                                chCode12-SF32(20),
                                                chCode11-SF32(21),
                                                chCode10-SF32(22),
                                                chCode9-SF32(23),
                                                chCode8-SF32(24),
                                                chCode7-SF32(25),
                                                chCode6-SF32(26),
                                                chCode5-SF32(27),
                                                chCode4-SF32(28),
                                                chCode3-SF32(29),
                                                chCode2-SF32(30),
                                                chCode1-SF32(31)
                                                }   (SIZE (32))
    }
}

DownlinkAdditionalTimeslots ::=     SEQUENCE {
    parameters                          CHOICE {
        sameAsLast                          SEQUENCE {
            timeslotNumber                      TimeslotNumber
        },
        newParameters                       SEQUENCE {
            individualTimeslotInfo              IndividualTimeslotInfo,
            dl-TS-ChannelisationCodesShort      DL-TS-ChannelisationCodesShort
```

```
        }
    }
}

DownlinkAdditionalTimeslots-VHCR ::= SEQUENCE {
    parameters                          CHOICE {
        sameAsLast                          SEQUENCE {
            timeslotNumber                      TimeslotNumber
        },
        newParameters                       SEQUENCE {
            individualTimeslotInfo              IndividualTimeslotInfo-VHCR,
            dl-TS-ChannelisationCodesShort      DL-TS-ChannelisationCodesShort-VHCR
        }
    }
}

DownlinkAdditionalTimeslots-LCR-r4 ::=  SEQUENCE {
    parameters                          CHOICE {
        sameAsLast                          SEQUENCE {
            timeslotNumber                      TimeslotNumber-LCR-r4
        },
        newParameters                       SEQUENCE {
            individualTimeslotInfo              IndividualTimeslotInfo-LCR-r4,
            dl-TS-ChannelisationCodesShort      DL-TS-ChannelisationCodesShort
        }
    }
}

DownlinkTimeslotsCodes ::=      SEQUENCE {
    firstIndividualTimeslotInfo         IndividualTimeslotInfo,
    dl-TS-ChannelisationCodesShort      DL-TS-ChannelisationCodesShort,
    moreTimeslots                       CHOICE {
        noMore                              NULL,
        additionalTimeslots                 CHOICE {
            consecutive                         INTEGER (1..maxTS-1),
            timeslotList                        SEQUENCE (SIZE (1..maxTS-1)) OF
                                                    DownlinkAdditionalTimeslots
        }
    }
}

DownlinkTimeslotsCodes-VHCR ::=     SEQUENCE {
    firstIndividualTimeslotInfo         IndividualTimeslotInfo-VHCR,
    dl-TS-ChannelisationCodesShort      DL-TS-ChannelisationCodesShort,
    moreTimeslots                       CHOICE {
        noMore                              NULL,
        additionalTimeslots                 CHOICE {
            consecutive                         INTEGER (1..maxTS-1),
            timeslotList                        SEQUENCE (SIZE (1..maxTS-1)) OF
                                                    DownlinkAdditionalTimeslots-VHCR
        }
    }
}

DownlinkTimeslotsCodes-LCR-r4 ::=   SEQUENCE {
    firstIndividualTimeslotInfo         IndividualTimeslotInfo-LCR-r4,
    dl-TS-ChannelisationCodesShort      DL-TS-ChannelisationCodesShort,
    moreTimeslots                       CHOICE {
        noMore                              NULL,
        additionalTimeslots                 CHOICE {
            consecutive                         INTEGER (1..maxTS-LCR-1),
            timeslotList                        SEQUENCE (SIZE (1..maxTS-LCR-1)) OF
                                                    DownlinkAdditionalTimeslots-LCR-r4
        }
    }
}

DPC-Mode ::=                        ENUMERATED {
                                        singleTPC,
                                        tpcTripletInSoft }

-- Actual value DPCCH-PowerOffset = IE value * 2
DPCCH-PowerOffset ::=               INTEGER (-82..-3)

-- Actual value DPCCH-PowerOffset2 = 2 + (IE value * 4)
DPCCH-PowerOffset2 ::=              INTEGER (-28..-13)

DPCH-CompressedModeInfo ::=         SEQUENCE {
```

```
    tgp-SequenceList                    TGP-SequenceList
}

DPCH-CompressedModeStatusInfo ::=   SEQUENCE {
    tgps-Reconfiguration-CFN            TGPS-Reconfiguration-CFN,
    tgp-SequenceShortList                   SEQUENCE (SIZE (1..maxTGPS)) OF
                                            TGP-SequenceShort
}

-- Actual value DPCH-FrameOffset = IE value * 256
DPCH-FrameOffset::=                 INTEGER (0..149)

DSCH-Mapping ::=                    SEQUENCE {
    maxTFCI-Field2Value                 MaxTFCI-Field2Value,
    spreadingFactor                     SF-PDSCH,
    codeNumber                          CodeNumberDSCH,
    multiCodeInfo                       MultiCodeInfo
}

DSCH-MappingList ::=                SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
                                        DSCH-Mapping

DSCH-RadioLinkIdentifier ::=        INTEGER (0..511)

DSCH-TransportChannelsInfo ::=      SEQUENCE (SIZE (1..maxTrCH)) OF
                                        SEQUENCE {
    dsch-transport-channel-identity         TransportChannelIdentity,
    dsch-TFS                                TransportFormatSet
}
DurationTimeInfo ::=                INTEGER (1..4096)

DynamicPersistenceLevel ::=         INTEGER (1..8)

DynamicPersistenceLevelList ::=     SEQUENCE (SIZE (1..maxPRACH)) OF
                                        DynamicPersistenceLevel

DynamicPersistenceLevelTF-List ::= SEQUENCE (SIZE (1..maxTF-CPCH)) OF
                                        DynamicPersistenceLevel

DynamicTFInformationCCCH ::=        SEQUENCE {
    octetModeRLC-SizeInfoType2          OctetModeRLC-SizeInfoType2
}

E-AGCH-ChannelisationCode ::=       INTEGER (0..255)

E-AGCH-Individual ::=               SEQUENCE {
    tS-number                           INTEGER (0..14),
    channelisation-code                 DL-TS-ChannelisationCode,
    midambleShiftAndBurstType           MidambleShiftAndBurstType
}

E-AGCH-Information ::=              SEQUENCE {
    e-AGCH-ChannelisationCode           E-AGCH-ChannelisationCode
}

E-AGCH-Information-r7 ::=           SEQUENCE {
    modeSpecific                        CHOICE {
        fdd                                 SEQUENCE {
            e-AGCH-ChannelisationCode           E-AGCH-ChannelisationCode
            },
        tdd                                 CHOICE {
            tdd384-tdd768                       SEQUENCE {
                long-Term-Grant-Indicator           BOOLEAN     OPTIONAL,
                length-of-TTRI-field                INTEGER (1..12),
                e-AGCH-Set-Config                   E-AGCH-Set-Config,
                e-AGCH-BLER-Target                  Bler-Target
            },
            tdd128                              NULL
        }
    }
}

E-AGCH-Set-Config ::=               SEQUENCE (SIZE (1..maxNumE-AGCH)) OF
                                        E-AGCH-Individual

E-DCH-MinimumSet-E-TFCI ::=         INTEGER (0..127)

E-DCH-ReconfigurationInfo ::=   SEQUENCE {
```

```
    e-DCH-RL-InfoNewServingCell         E-DCH-RL-InfoNewServingCell             OPTIONAL,
    e-DCH-RL-InfoOtherCellList          SEQUENCE (SIZE (1..maxEDCHRL)) OF
                                            E-DCH-RL-InfoOtherCell              OPTIONAL
}

E-DCH-RL-InfoNewServingCell ::=     SEQUENCE {
    primaryCPICH-Info                   PrimaryCPICH-Info,
    e-AGCH-Information                  E-AGCH-Information,
    servingGrant                        SEQUENCE {
        value                               INTEGER (0..38)                     OPTIONAL,
        primary-Secondary-GrantSelector     ENUMERATED { primary, secondary }
    }   OPTIONAL,
    e-DPCCH-DPCCH-PowerOffset           E-DPCCH-DPCCH-PowerOffset               OPTIONAL,
    reference-E-TFCIs                   E-DPDCH-Reference-E-TFCIList            OPTIONAL,
    powerOffsetForSchedInfo             INTEGER (0..6)                          OPTIONAL,
    threeIndexStepThreshold             INTEGER (0..37)                         OPTIONAL,
    twoIndexStepThreshold               INTEGER (0..37)                         OPTIONAL,
    e-HICH-Information                  E-HICH-Information      OPTIONAL,
    e-RGCH-Info                         CHOICE  {
        e-RGCH-Information                  E-RGCH-Information,
        releaseIndicator                    NULL
    }   OPTIONAL
}

E-DCH-RL-InfoOtherCell ::=          SEQUENCE {
    primaryCPICH-Info                   PrimaryCPICH-Info,
    e-HICH-Info                         CHOICE {
        e-HICH-Information                  E-HICH-Information,
        releaseIndicator                    NULL
    }   OPTIONAL,
    e-RGCH-Info                         CHOICE {
        e-RGCH-Information                  E-RGCH-Information,
        releaseIndicator                    NULL
    }   OPTIONAL
}

E-DPCCH-Info ::=                    SEQUENCE {
    e-DPCCH-DPCCH-PowerOffset           E-DPCCH-DPCCH-PowerOffset,
    happyBit-DelayCondition             HappyBit-DelayCondition
}

E-DPCCH-DPCCH-PowerOffset ::=       INTEGER (0..8)

E-DPDCH-Info ::=                    SEQUENCE {
    e-TFCI-TableIndex                   E-TFCI-TableIndex,
    e-DCH-MinimumSet-E-TFCI             E-DCH-MinimumSet-E-TFCI             OPTIONAL,
    reference-E-TFCIs                   E-DPDCH-Reference-E-TFCIList,
    maxChannelisationCodes              E-DPDCH-MaxChannelisationCodes,
    pl-NonMax                           E-DPDCH-PL-NonMax,
    schedulingInfoConfiguration         E-DPDCH-SchedulingInfoConfiguration,
    threeIndexStepThreshold             INTEGER (0..37)                     OPTIONAL,
    twoIndexStepThreshold               INTEGER (0..37)                     OPTIONAL
}

E-DPDCH-PeriodicyOfSchedInfo ::=    ENUMERATED {
                                        everyEDCHTTI, ms4, ms10, ms20, ms50, ms100, ms200, ms500,
                                        ms1000 }

-- The actual value of E-DPDCH-PL-NonMax is: IE value * 0.04
E-DPDCH-PL-NonMax ::=               INTEGER (11..25)

E-DPDCH-Reference-E-TFCI ::=        SEQUENCE {
    reference-E-TFCI                    INTEGER (0..127),
    reference-E-TFCI-PO                 INTEGER (0..29)
}

E-DPDCH-Reference-E-TFCIList ::=    SEQUENCE (SIZE (1..8)) OF E-DPDCH-Reference-E-TFCI

E-DPDCH-SchedulingInfoConfiguration ::= SEQUENCE {
    periodicityOfSchedInfo-NoGrant      E-DPDCH-PeriodicyOfSchedInfo       OPTIONAL,
    periodicityOfSchedInfo-Grant        E-DPDCH-PeriodicyOfSchedInfo       OPTIONAL,
    powerOffsetForSchedInfo             INTEGER (0..6)
}

E-DPDCH-SchedulingTransmConfiguration ::= SEQUENCE {
    ms2-SchedTransmGrantHARQAlloc       BIT STRING (SIZE (8))              OPTIONAL,
    servingGrant                        SEQUENCE {
        value                               INTEGER (0..38),
```

```
        primary-Secondary-GrantSelector     ENUMERATED { primary, secondary }
    }       OPTIONAL
}

E-DPDCH-MaxChannelisationCodes ::=  ENUMERATED {
                                        sf256, sf128, sf64, sf32, sf16, sf8, sf4, sf4x2, sf2x2,
sf4x2-and-sf2x2 }

E-HICH-ChannelisationCode ::=       INTEGER (0..127)

E-HICH-Information ::=              SEQUENCE {
    channelisationCode                  E-HICH-ChannelisationCode,
    signatureSequence                   E-HICH-RGCH-SignatureSequence
}

E-HICH-Information-TDD384-768 ::=   SEQUENCE {
    n-E-HICH                            INTEGER (4..44),
    tS-Number                           INTEGER (0..14),
    modeSpecificInfo                        CHOICE  {
        tdd384                                  DL-TS-ChannelisationCode,
        tdd768                                  DL-TS-ChannelisationCode-VHCR
    },
    burst-Type                          ENUMERATED { type1, type2 },
    midamble-Allocation-Mode            ENUMERATED { default, common }
}

E-HICH-RGCH-SignatureSequence ::=   INTEGER (0..39)

E-PUCH-Info ::=                     SEQUENCE {
    e-TFCS-Info                         E-TFCS-Info,
    noSlotsForTFCIandTPC                INTEGER (1..12),
    e-PUCH-ContantValue                 INTEGER (-35..10),
    e-PUCH-TS-ConfigurationList         SEQUENCE (SIZE (1..maxTS-2)) OF E-PUCH-TS-Slots,
    e-PUCH-CodeHopping                  BOOLEAN,
    e-PUCH-TPC-Step-Size                INTEGER (1..3),
    minimum-Allowed-Code-Rate           INTEGER (0..63),
    maximum-Allowed-Code-Rate           INTEGER (0..63)
}

E-PUCH-TS-Slots ::=                 SEQUENCE {
    tS-Numnber                          INTEGER (0..14),
    midambleShiftAndBurstType           MidambleShiftAndBurstType
}

E-RGCH-CombinationIndex ::=         INTEGER (0..5)

E-RGCH-Information ::=              SEQUENCE {
    signatureSequence                   E-HICH-RGCH-SignatureSequence,
    rg-CombinationIndex                 E-RGCH-CombinationIndex
}

E-RUCCH-Info ::=                    SEQUENCE {
    e-RUCCH-ConstantValue               INTEGER (-35..10),
    e-RUCCH-PersistenceScalingFactor    PersistenceScalingFactor,
    t-RUCCH                             ENUMERATED {ms40, ms80, ms120, ms160, ms200,
                                            ms240, ms280, ms320}                    OPTIONAL,
    e-RUCCH-TS-Number                   INTEGER (0..14) OPTIONAL,
    e-RUCCH-Midamble                    ENUMERATED {direct, direct-Inverted}        OPTIONAL,
    modeSpecificInfo                    CHOICE {
        tdd384                              CHOICE {
            sF16                                SEQUENCE (SIZE (1..8)) OF SF16Codes,
            sF8                                 SEQUENCE (SIZE (1..8)) OF SF8Codes
            },
        tdd768                          CHOICE {
            sF32                                SEQUENCE (SIZE (1..16)) OF SF32Codes,
            sF816                               SEQUENCE (SIZE (1..16)) OF SF16Codes2
        }
    }
}

E-TFCI-TableIndex ::=               INTEGER (0..1)

E-TFCS-Info ::=                     SEQUENCE {
    reference-Beta-QPSK-List            SEQUENCE (SIZE (1..8)) OF Reference-Beta-QPSK,
    reference-Beta-16QAM-List           SEQUENCE (SIZE (1..8)) OF Reference-Beta-16QAM
}

EXT-UL-TimingAdvance ::=            SEQUENCE {
```

```
    modeSpecificInfo                CHOICE {
        tdd384                          SEQUENCE {
            ex-ul-TimingAdvance         INTEGER (0..255)
        },
        tdd768                          SEQUENCE {
            ex-ul-TimingAdvance         INTEGER (0..511)
        }
    }
}

FACH-PCH-Information ::=             SEQUENCE {
    transportFormatSet                  TransportFormatSet,
    transportChannelIdentity            TransportChannelIdentity,
    ctch-Indicator                      BOOLEAN
}

FACH-PCH-InformationList ::=         SEQUENCE (SIZE (1..maxFACHPCH)) OF
                                        FACH-PCH-Information

Feedback-cycle ::=                   ENUMERATED {
                                        fc0, fc2, fc4, fc8, fc10, fc20, fc40, fc80, fc160}

FPACH-Info-r4 ::=                       SEQUENCE {
    timeslot                            TimeslotNumber-LCR-r4,
    channelisationCode                  TDD-FPACH-CCode16-r4,
    midambleShiftAndBurstType           MidambleShiftAndBurstType-LCR-r4,
    wi                                  Wi-LCR
}

FrequencyInfo ::=                    SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 FrequencyInfoFDD,
        tdd                                 FrequencyInfoTDD    }
}

FrequencyInfoFDD ::=                 SEQUENCE {
    uarfcn-UL                           UARFCN              OPTIONAL,
    uarfcn-DL                           UARFCN
}

FrequencyInfoTDD ::=                 SEQUENCE {
    uarfcn-Nt                           UARFCN
}

HappyBit-DelayCondition ::=          ENUMERATED {
                                        ms2, ms10, ms20, ms50, ms100, ms200, ms500, ms1000 }

HARQ-Preamble-Mode ::=               INTEGER (0..1)

HS-ChannelisationCode-LCR ::=        ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16 }

HS-PDSCH-Midamble-Configuration-TDD128 ::=  SEQUENCE {
    midambleAllocationMode              CHOICE{
        defaultMidamble                     NULL,
        commonMidamble                      NULL,
        ueSpecificMidamble                  INTEGER (0..15)
    },
    -- Actual value midambleConfiguration = IE value * 2
    midambleConfiguration               INTEGER (1..8)
}

HS-SCCH-Info ::=                     SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            hS-SCCHChannelisationCodeInfo       SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                    HS-SCCH-Codes,
            dl-ScramblingCode                   SecondaryScramblingCode     OPTIONAL
        },
        tdd                                 CHOICE {
            tdd384                              SEQUENCE {
                nack-ack-power-offset               INTEGER (-7..8),
                hs-SICH-PowerControl-Info           HS-SICH-Power-Control-Info-TDD384,
                hS-SCCH-SetConfiguration            SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                        HS-SCCH-TDD384
```

```
            },
            tdd128                              SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                    HS-SCCH-TDD128
        }
    }
}

HS-SCCH-Info-r6 ::=                 SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            hS-SCCHChannelisationCodeInfo       SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                    HS-SCCH-Codes,
            dl-ScramblingCode                   SecondaryScramblingCode         OPTIONAL
        },
        tdd                                 CHOICE {
            tdd384                              SEQUENCE {
                nack-ack-power-offset               INTEGER (-7..8),
                hs-SICH-PowerControl-Info           HS-SICH-Power-Control-Info-TDD384,
                dhs-sync                            DHS-Sync                    OPTIONAL,
                bler-target                         Bler-Target,
                hS-SCCH-SetConfiguration            SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                        HS-SCCH-TDD384-r6
                },
            tdd128                              SEQUENCE {
                nack-ack-power-offset               INTEGER (-7..8),
                power-level-HSSICH                  INTEGER (-120..-58),
                tpc-step-size                       ENUMERATED { s1, s2, s3 , spare1 },
                bler-target                         Bler-Target,
                hS-SCCH-SetConfiguration            SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                        HS-SCCH-TDD128-r6
            }
        }
    }
}

HS-SCCH-Info-r7 ::=                 SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            hS-SCCHChannelisationCodeInfo       SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                    HS-SCCH-Codes,
            dl-ScramblingCode                   SecondaryScramblingCode         OPTIONAL
        },
        tdd                                 CHOICE {
            tdd384                              SEQUENCE {
                nack-ack-power-offset               INTEGER (-7..8),
                hs-SICH-PowerControl-Info           HS-SICH-Power-Control-Info-TDD384,
                dhs-sync                            DHS-Sync                    OPTIONAL,
                hS-SCCH-SetConfiguration            SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                        HS-SCCH-TDD384-r6
                },
            tdd768                              SEQUENCE {
                nack-ack-power-offset               INTEGER (-7..8),
                hs-SICH-PowerControl-Info           HS-SICH-Power-Control-Info-TDD768,
                dhs-sync                            DHS-Sync                    OPTIONAL,
                bler-target                         Bler-Target,
                hS-SCCH-SetConfiguration            SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                        HS-SCCH-TDD768
                },
            tdd128                              SEQUENCE {
                nack-ack-power-offset               INTEGER (-7..8),
                power-level-HSSICH                  INTEGER (-120..-58),
                tpc-step-size                       ENUMERATED { s1, s2, s3 , spare1 },
                bler-target                         Bler-Target,
                hS-SCCH-SetConfiguration            SEQUENCE (SIZE (1..maxHSSCCHs)) OF
                                                        HS-SCCH-TDD128-r6
            }
        }
    }
}

HS-SCCH-Codes ::=                   INTEGER (0..127)

HS-SCCH-TDD128 ::=              SEQUENCE {
    timeslotNumber                      TimeslotNumber-LCR-r4,
    firstChannelisationCode             HS-ChannelisationCode-LCR,
    secondChannelisationCode            HS-ChannelisationCode-LCR,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
```

```
        commonMidamble                      NULL,
        ueSpecificMidamble                  INTEGER(0..15)
    },
    -- Actual value midambleConfiguration = IE value * 2
    midambleConfiguration               INTEGER (1..8),
    bler-target                         Bler-Target,
    hs-sich-configuration               HS-SICH-Configuration-TDD128
}

HS-SCCH-TDD128-r6 ::=               SEQUENCE {
    timeslotNumber                      TimeslotNumber-LCR-r4,
    firstChannelisationCode             HS-ChannelisationCode-LCR,
    secondChannelisationCode            HS-ChannelisationCode-LCR,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        commonMidamble                      NULL,
        ueSpecificMidamble                  INTEGER(0..15)
    },
    -- Actual value midambleConfiguration = IE value * 2
    midambleConfiguration               INTEGER (1..8),
    hs-sich-configuration               HS-SICH-Configuration-TDD128-r6
}

HS-SICH-Configuration-TDD128 ::=    SEQUENCE {
    timeslotNumber                      TimeslotNumber-LCR-r4,
    channelisationCode                  HS-ChannelisationCode-LCR,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       MidambleShiftLong
        }
    },
    -- Actual value midambleConfiguration = IE value * 2
    midambleConfiguration               INTEGER (1..8),
    nack-ack-power-offset               INTEGER (-7..8),
    power-level-HSSICH                  INTEGER (-120..-58),
    tpc-step-size                       ENUMERATED { s1, s2, s3 , spare1}
}

HS-SICH-Configuration-TDD128-r6 ::= SEQUENCE {
    timeslotNumber                      TimeslotNumber-LCR-r4,
    channelisationCode                  HS-ChannelisationCode-LCR,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       MidambleShiftLong
        }
    },
    -- Actual value midambleConfiguration = IE value * 2
    midambleConfiguration               INTEGER (1..8)
}

HS-SCCH-TDD384 ::=              SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    channelisationCode                  DL-TS-ChannelisationCode,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        commonMidamble                      NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       MidambleShiftLong
        }
    },
    midambleconfiguration               MidambleConfigurationBurstType1and3,
    bler-target                         Bler-Target,
    hs-sich-configuration               HS-SICH-Configuration-TDD384
}

HS-SCCH-TDD384-r6 ::=               SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    channelisationCode                  DL-TS-ChannelisationCode,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        commonMidamble                      NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       MidambleShiftLong
        }
    },
    midambleconfiguration               MidambleConfigurationBurstType1and3,
```

```
    hs-sich-configuration               HS-SICH-Configuration-TDD384
}

HS-SCCH-TDD768 ::=              SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    channelisationCode                  DL-TS-ChannelisationCode-VHCR,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        commonMidamble                      NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       MidambleShiftLong
        }
    },
    midambleconfiguration               MidambleConfigurationBurstType1and3,
    hs-sich-configuration               HS-SICH-Configuration-TDD768
}

HS-SICH-Configuration-TDD384 ::=    SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    channelisationCode                  DL-TS-ChannelisationCode,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       MidambleShiftLong
        }
    },
    midambleconfiguration               MidambleConfigurationBurstType1and3
}

HS-SICH-Configuration-TDD768 ::=    SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    channelisationCode                  DL-TS-ChannelisationCode-VHCR,
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       MidambleShiftLong
        }
    },
    midambleconfiguration               MidambleConfigurationBurstType1and3
}

HS-SICH-Power-Control-Info-TDD384 ::= SEQUENCE {
    -- Actual value ul-target-SIR = IE value * 0.5
    ul-target-SIR                       INTEGER (-22..40),
    hs-sich-ConstantValue               ConstantValue
}

HS-SICH-Power-Control-Info-TDD768 ::= SEQUENCE {
    -- Actual value ul-target-SIR = IE value * 0.5
    ul-target-SIR                       INTEGER (-22..40),
    hs-sich-ConstantValue               ConstantValue
}

IndividualTimeslotInfo ::=          SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    tfci-Existence                      BOOLEAN,
    midambleShiftAndBurstType           MidambleShiftAndBurstType
}

IndividualTimeslotInfo-VHCR ::=         SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    tfci-Existence                      BOOLEAN,
    midambleShiftAndBurstType-VHCR      MidambleShiftAndBurstType-VHCR
}

IndividualTimeslotInfo-LCR-r4 ::=   SEQUENCE {
    timeslotNumber                      TimeslotNumber-LCR-r4,
    tfci-Existence                      BOOLEAN,
    midambleShiftAndBurstType           MidambleShiftAndBurstType-LCR-r4,
    modulation                          ENUMERATED { mod-QPSK, mod-8PSK },
    ss-TPC-Symbols                      ENUMERATED { zero, one, sixteenOverSF },
    additionalSS-TPC-Symbols            INTEGER(1..15)      OPTIONAL
}

IndividualTimeslotInfo-LCR-r4-ext ::=       SEQUENCE {
-- timeslotNumber and tfci-Existence is taken from IndividualTimeslotInfo.
-- midambleShiftAndBurstType in IndividualTimeslotInfo shall be ignored.
    midambleShiftAndBurstType           MidambleShiftAndBurstType-LCR-r4,
```

```
    modulation                          ENUMERATED { mod-QPSK, mod-8PSK },
    ss-TPC-Symbols                      ENUMERATED { zero, one, sixteenOverSF }
}

IndividualTS-Interference ::=       SEQUENCE {
    timeslot                            TimeslotNumber,
    ul-TimeslotInterference             TDD-UL-Interference
}

IndividualTS-InterferenceList ::=   SEQUENCE (SIZE (1..maxTS)) OF
                                        IndividualTS-Interference

ITP ::=                             ENUMERATED {
                                        mode0, mode1 }

NidentifyAbort ::=  INTEGER (1..128)

MaxAllowedUL-TX-Power ::=           INTEGER (-50..33)

MaxAvailablePCPCH-Number ::=        INTEGER (1..64)
MaxPowerIncrease-r4 ::=             INTEGER (0..3)

MaxTFCI-Field2Value ::=             INTEGER (1..1023)

Measurement-Feedback-Info ::=       SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            measurementPowerOffset          MeasurementPowerOffset,
            feedback-cycle                  Feedback-cycle,
            cqi-RepetitionFactor            CQI-RepetitionFactor,
            deltaCQI                        DeltaCQI
        },
        tdd                             NULL
    }
}


MidambleConfigurationBurstTypeland3 ::= ENUMERATED {ms4, ms8, ms16}

MidambleConfigurationBurstType2 ::=     ENUMERATED {ms3, ms6}

MidambleConfigurationBurstType2-VHCR ::=        ENUMERATED {ms4, ms8}

MidambleShiftAndBurstType ::=       SEQUENCE {
    burstType                           CHOICE {
        type1                               SEQUENCE {
            midambleConfigurationBurstTypeland3 MidambleConfigurationBurstTypeland3,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftLong
                }
            }
        },
        type2                               SEQUENCE {
            midambleConfigurationBurstType2     MidambleConfigurationBurstType2,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftShort
                }
            }
        },
        type3                               SEQUENCE {
            midambleConfigurationBurstTypeland3 MidambleConfigurationBurstTypeland3,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftLong
                }
            }
        }
    }
}

MidambleShiftAndBurstType-VHCR ::=  SEQUENCE {
```

```
    burstType                           CHOICE {
        type1                               SEQUENCE {
            midambleConfigurationBurstType1and3 MidambleConfigurationBurstType1and3,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftLong
                }
            }
        },
        type2                               SEQUENCE {
            midambleConfigurationBurstType2     MidambleConfigurationBurstType2-VHCR,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftShort-VHCR
                }
            }
        },
        type3                               SEQUENCE {
            midambleConfigurationBurstType1and3 MidambleConfigurationBurstType1and3,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftLong
                }
            }
        }
    }
}

MidambleShiftAndBurstType-DL ::=        SEQUENCE {
    burstType                           CHOICE {
        type1                               SEQUENCE {
            midambleConfigurationBurstType1and3 MidambleConfigurationBurstType1and3,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftLong
                }
            }
        },
        type2                               SEQUENCE {
            midambleConfigurationBurstType2     MidambleConfigurationBurstType2,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftShort
                }
            }
        }
    }
}

MidambleShiftAndBurstType-DL-VHCR ::= SEQUENCE {
    burstType                           CHOICE {
        type1                               SEQUENCE {
            midambleConfigurationBurstType1and3 MidambleConfigurationBurstType1and3,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftLong
                }
            }
        },
        type2                               SEQUENCE {
            midambleConfigurationBurstType2     MidambleConfigurationBurstType2-VHCR,
            midambleAllocationMode          CHOICE {
                defaultMidamble                 NULL,
                commonMidamble                  NULL,
                ueSpecificMidamble              SEQUENCE {
                    midambleShift                   MidambleShiftShort-VHCR
                }
```

```
            }
        }
    }
}

MidambleShiftAndBurstType-LCR-r4 ::=    SEQUENCE {
    midambleAllocationMode              CHOICE {
        defaultMidamble                     NULL,
        commonMidamble                      NULL,
        ueSpecificMidamble                  SEQUENCE {
            midambleShift                       INTEGER (0..15)
        }
    },
    -- Actual value midambleConfiguration = IE value * 2
    midambleConfiguration               INTEGER (1..8)
}

MidambleShiftLong ::=               INTEGER (0..15)


MidambleShiftShort ::=              INTEGER (0..5)

MidambleShiftShort-VHCR ::=         INTEGER (0..7)

MinimumSpreadingFactor ::=          ENUMERATED {
                                        sf4, sf8, sf16, sf32,
                                        sf64, sf128, sf256 }

MultiCodeInfo ::=                   INTEGER (1..16)


N-EOT ::=                           INTEGER (0..7)

N-GAP ::=                           ENUMERATED {
                                        f2, f4, f8 }

N-PCH ::=                           INTEGER (1..8)

N-StartMessage ::=                  INTEGER (1..8)

NB01 ::=                            INTEGER (0..50)

NF-Max ::=                          INTEGER (1..64)

NumberOfDPDCH ::=                   INTEGER (1..maxDPDCH-UL)

NumberOfFBI-Bits ::=                INTEGER (1..2)

OpenLoopPowerControl-TDD ::=        SEQUENCE {
    primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power,
    -- alpha, prach-ConstantValue, dpch-ConstantValue and pusch-ConstantValue
    -- shall be ignored in 1.28Mcps TDD mode.
    alpha                               Alpha                       OPTIONAL,
    prach-ConstantValue                 ConstantValueTdd,
    dpch-ConstantValue                  ConstantValueTdd,
    pusch-ConstantValue                 ConstantValueTdd            OPTIONAL
}

OpenLoopPowerControl-IPDL-TDD-r4 ::=    SEQUENCE {
    ipdl-alpha                          Alpha,
    maxPowerIncrease                    MaxPowerIncrease-r4
}

PagingIndicatorLength ::=           ENUMERATED {
                                        pi4, pi8, pi16 }

PC-Preamble ::=                     INTEGER (0..7)

PCP-Length ::=                      ENUMERATED {
                                        as0, as8 }

PCPCH-ChannelInfo ::=               SEQUENCE {
    pcpch-UL-ScramblingCode             INTEGER (0..79),
    pcpch-DL-ChannelisationCode         INTEGER (0..511),
    pcpch-DL-ScramblingCode             SecondaryScramblingCode             OPTIONAL,
    pcp-Length                          PCP-Length,
    ucsm-Info                           UCSM-Info                           OPTIONAL
}
```

```
PCPCH-ChannelInfoList ::=           SEQUENCE (SIZE (1..maxPCPCHs)) OF
                                        PCPCH-ChannelInfo

PCPICH-UsageForChannelEst ::=       ENUMERATED {
                                        mayBeUsed,
                                        shallNotBeUsed }

PDSCH-CapacityAllocationInfo ::=    SEQUENCE {
    -- pdsch-PowerControlInfo is conditional on new-configuration branch below, if this
    -- selected the IE is OPTIONAL otherwise it should not be sent
    pdsch-PowerControlInfo              PDSCH-PowerControlInfo              OPTIONAL,
    pdsch-AllocationPeriodInfo          AllocationPeriodInfo,
    configuration                       CHOICE {
        old-Configuration                   SEQUENCE {
            tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
            pdsch-Identity                      PDSCH-Identity
        },
        new-Configuration                   SEQUENCE {
            pdsch-Info                          PDSCH-Info,
            pdsch-Identity                      PDSCH-Identity              OPTIONAL
        }
    }
}

PDSCH-CapacityAllocationInfo-r4 ::= SEQUENCE {
    pdsch-AllocationPeriodInfo          AllocationPeriodInfo,
    configuration                       CHOICE {
        old-Configuration                   SEQUENCE {
            tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
            pdsch-Identity                      PDSCH-Identity
        },
        new-Configuration                   SEQUENCE {
            pdsch-Info                          PDSCH-Info-r4,
            pdsch-Identity                      PDSCH-Identity              OPTIONAL,
            pdsch-PowerControlInfo              PDSCH-PowerControlInfo      OPTIONAL
        }
    }
}

PDSCH-CapacityAllocationInfo-r7 ::= SEQUENCE {
    pdsch-AllocationPeriodInfo          AllocationPeriodInfo,
    configuration                       CHOICE {
        old-Configuration                   SEQUENCE {
            tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
            pdsch-Identity                      PDSCH-Identity
        },
        new-Configuration                   SEQUENCE {
            pdsch-Info                          PDSCH-Info-r7,
            pdsch-Identity                      PDSCH-Identity              OPTIONAL,
            pdsch-PowerControlInfo              PDSCH-PowerControlInfo      OPTIONAL
        }
    }
}

PDSCH-CodeInfo ::=                  SEQUENCE {
    spreadingFactor                     SF-PDSCH,
    codeNumber                          CodeNumberDSCH,
    multiCodeInfo                       MultiCodeInfo
}

PDSCH-CodeInfoList ::=              SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
                                        PDSCH-CodeInfo

PDSCH-CodeMap ::=                   SEQUENCE {
    spreadingFactor                     SF-PDSCH,
    multiCodeInfo                       MultiCodeInfo,
    codeNumberStart                     CodeNumberDSCH,
    codeNumberStop                      CodeNumberDSCH
}

PDSCH-CodeMapList ::=               SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
                                        PDSCH-CodeMap

PDSCH-CodeMapping ::=               SEQUENCE {
    dl-ScramblingCode                   SecondaryScramblingCode             OPTIONAL,
    signallingMethod                    CHOICE {
        codeRange                           CodeRange,
```

```
        tfci-Range                      DSCH-MappingList,
        explicit-config                 PDSCH-CodeInfoList,
        replace                         ReplacedPDSCH-CodeInfoList
    }
}

PDSCH-Identity ::=                  INTEGER (1..hiPDSCHidentities)


PDSCH-Info ::=                      SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    pdsch-TimeslotsCodes                DownlinkTimeslotsCodes              OPTIONAL
}

PDSCH-Info-r4 ::=                       SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    tddOption                           CHOICE {
        tdd384                              SEQUENCE {
            pdsch-TimeslotsCodes                DownlinkTimeslotsCodes      OPTIONAL
        },
        tdd128                              SEQUENCE {
            pdsch-TimeslotsCodes                DownlinkTimeslotsCodes-LCR-r4   OPTIONAL
        }
    }
}

PDSCH-Info-r7 ::=                       SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    tddOption                           CHOICE {
        tdd384                              SEQUENCE {
            pdsch-TimeslotsCodes                DownlinkTimeslotsCodes      OPTIONAL
        },
        tdd768                              SEQUENCE {
            pdsch-TimeslotsCodes                DownlinkTimeslotsCodes-VHCR     OPTIONAL
        },
        tdd128                              SEQUENCE {
            pdsch-TimeslotsCodes                DownlinkTimeslotsCodes-LCR-r4   OPTIONAL
        }
    }
}

PDSCH-Info-LCR-r4 ::=               SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    pdsch-TimeslotsCodes                DownlinkTimeslotsCodes-LCR-r4       OPTIONAL
}

PDSCH-PowerControlInfo ::=          SEQUENCE {
    tpc-StepSizeTDD                     TPC-StepSizeTDD                     OPTIONAL,
    ul-CCTrChTPCList                    UL-CCTrChTPCList                    OPTIONAL
}

PDSCH-SHO-DCH-Info ::=              SEQUENCE {
    dsch-RadioLinkIdentifier            DSCH-RadioLinkIdentifier,
    rl-IdentifierList                   RL-IdentifierList                   OPTIONAL
}

PDSCH-SysInfo ::=                   SEQUENCE {
    pdsch-Identity                      PDSCH-Identity,
    pdsch-Info                          PDSCH-Info,
    dsch-TFS                            TransportFormatSet                  OPTIONAL,
    dsch-TFCS                           TFCS                                OPTIONAL
}

PDSCH-SysInfo-r7 ::=                SEQUENCE {
    pdsch-Identity                      PDSCH-Identity,
    pdsch-Info                          PDSCH-Info-r7,
    dsch-TransportChannelsInfo          DSCH-TransportChannelsInfo          OPTIONAL,
    dsch-TFCS                           TFCS                                OPTIONAL
}

PDSCH-SysInfo-HCR-r5 ::=                SEQUENCE {
    pdsch-Identity                      PDSCH-Identity,
    pdsch-Info                          PDSCH-Info,
    dsch-TransportChannelsInfo          DSCH-TransportChannelsInfo          OPTIONAL,
```

```
    dsch-TFCS                           TFCS                                OPTIONAL
}

PDSCH-SysInfo-LCR-r4 ::=            SEQUENCE {
    pdsch-Identity                      PDSCH-Identity,
    pdsch-Info                          PDSCH-Info-LCR-r4,
    dsch-TFS                            TransportFormatSet                  OPTIONAL,
    dsch-TFCS                           TFCS                                OPTIONAL
}

PDSCH-SysInfoList ::=               SEQUENCE (SIZE (1..maxPDSCH)) OF
                                        PDSCH-SysInfo

PDSCH-SysInfoList-r7 ::=            SEQUENCE (SIZE (1..maxPDSCH)) OF PDSCH-SysInfo-r7

PDSCH-SysInfoList-HCR-r5 ::=            SEQUENCE (SIZE (1..maxPDSCH)) OF PDSCH-SysInfo-HCR-r5

PDSCH-SysInfoList-LCR-r4 ::=        SEQUENCE (SIZE (1..maxPDSCH)) OF
                                        PDSCH-SysInfo-LCR-r4

PDSCH-SysInfoList-SFN ::=           SEQUENCE (SIZE (1..maxPDSCH)) OF
                                        SEQUENCE {
    pdsch-SysInfo                           PDSCH-SysInfo,
    sfn-TimeInfo                            SFN-TimeInfo                    OPTIONAL
}

PDSCH-SysInfoList-SFN-HCR-r5 ::=            SEQUENCE (SIZE (1..maxPDSCH)) OF
                                        SEQUENCE {
    pdsch-SysInfo                           PDSCH-SysInfo-HCR-r5,
    sfn-TimeInfo                            SFN-TimeInfo                    OPTIONAL
}

PDSCH-SysInfoList-SFN-LCR-r4 ::=    SEQUENCE (SIZE (1..maxPDSCH)) OF
                                        SEQUENCE {
    pdsch-SysInfo                           PDSCH-SysInfo-LCR-r4,
    sfn-TimeInfo                            SFN-TimeInfo                    OPTIONAL
}

PersistenceScalingFactor ::=        ENUMERATED {
                                        psf0-9, psf0-8, psf0-7, psf0-6,
                                        psf0-5, psf0-4, psf0-3, psf0-2 }

PersistenceScalingFactorList ::=    SEQUENCE (SIZE (1..maxASCpersist)) OF
                                        PersistenceScalingFactor

PI-CountPerFrame ::=                ENUMERATED {
                                        e18, e36, e72, e144 }

PichChannelisationCodeList-LCR-r4 ::=   SEQUENCE (SIZE (1..2)) OF
                                        DL-TS-ChannelisationCode

PICH-Info ::=                       CHOICE {
    fdd                                 SEQUENCE {
        channelisationCode256               ChannelisationCode256,
        pi-CountPerFrame                    PI-CountPerFrame,
        sttd-Indicator                      BOOLEAN
    },
    tdd                                 SEQUENCE {
        channelisationCode                  TDD-PICH-CCode                  OPTIONAL,
        timeslot                            TimeslotNumber                  OPTIONAL,
        midambleShiftAndBurstType           MidambleShiftAndBurstType,
        repetitionPeriodLengthOffset        RepPerLengthOffset-PICH         OPTIONAL,
        pagingIndicatorLength               PagingIndicatorLength           DEFAULT pi4,
        n-GAP                               N-GAP                           DEFAULT f4,
        n-PCH                               N-PCH                           DEFAULT 2
    }
}

PICH-Info-r7 ::=                    CHOICE {
    fdd                                 SEQUENCE {
        channelisationCode256               ChannelisationCode256,
        pi-CountPerFrame                    PI-CountPerFrame,
        sttd-Indicator                      BOOLEAN
    },
    tdd384                              SEQUENCE {
        channelisationCode                  TDD-PICH-CCode                  OPTIONAL,
        timeslot                            TimeslotNumber                  OPTIONAL,
        midambleShiftAndBurstType           MidambleShiftAndBurstType,
```

```
        repetitionPeriodLengthOffset        RepPerLengthOffset-PICH         OPTIONAL,
        pagingIndicatorLength               PagingIndicatorLength           DEFAULT pi4,
        n-GAP                               N-GAP                           DEFAULT f4,
        n-PCH                               N-PCH                           DEFAULT 2
    },
    tdd768                                  SEQUENCE {
        channelisationCode                  TDD768-PICH-CCode               OPTIONAL,
        timeslot                            TimeslotNumber                  OPTIONAL,
        midambleShiftAndBurstType           MidambleShiftAndBurstType,
        repetitionPeriodLengthOffset        RepPerLengthOffset-PICH         OPTIONAL,
        pagingIndicatorLength               PagingIndicatorLength           DEFAULT pi4,
        n-GAP                               N-GAP                           DEFAULT f4,
        n-PCH                               N-PCH                           DEFAULT 2
    }
}

PICH-Info-LCR-r4 ::=                SEQUENCE {
    timeslot                            TimeslotNumber-LCR-r4               OPTIONAL,
    pichChannelisationCodeList-LCR-r4   PichChannelisationCodeList-LCR-r4,
    midambleShiftAndBurstType           MidambleShiftAndBurstType-LCR-r4,
    repetitionPeriodLengthOffset        RepPerLengthOffset-PICH             OPTIONAL,
    pagingIndicatorLength               PagingIndicatorLength           DEFAULT pi4,
    n-GAP                               N-GAP                           DEFAULT f4,
    n-PCH                               N-PCH                           DEFAULT 2
}

PICH-PowerOffset ::=                INTEGER (-10..5)

PilotBits128 ::=                    ENUMERATED {
                                        pb4, pb8 }

PilotBits256 ::=                    ENUMERATED {
                                        pb2, pb4, pb8 }

    -- Actual measurement power offset value = IE value * 0.5
MeasurementPowerOffset ::=          INTEGER (-12..26)

PLCCH-Info      ::=                 SEQUENCE {
    plcchSequenceNumber             INTEGER(1..14),
    timeslotNumber                  TimeslotNumber-LCR-r4,
    channelisationCode              DL-TS-ChannelisationCode,
    tpcCommandTargetRate            TPC-CommandTargetRate
}

PositionFixedOrFlexible ::=         ENUMERATED {
                                        fixed,
                                        flexible }

PowerControlAlgorithm ::=           CHOICE {
    algorithm1                          TPC-StepSizeFDD,
    algorithm2                          NULL
}

PowerOffsetPilot-pdpdch ::=         INTEGER (0..24)

PowerOffsetTPC-pdpdch ::=           INTEGER (0..24)

PowerRampStep ::=                   INTEGER (1..8)

PRACH-ChanCodes-LCR-r4 ::=          SEQUENCE (SIZE (1..4)) OF
                                        TDD-PRACH-CCode-LCR-r4

PRACH-Definition-LCR-r4 ::=         SEQUENCE {
    timeslot                            TimeslotNumber-PRACH-LCR-r4,
    prach-ChanCodes-LCR                 PRACH-ChanCodes-LCR-r4,
    midambleShiftAndBurstType           MidambleShiftAndBurstType-LCR-r4,
    fpach-Info                          FPACH-Info-r4
}

PRACH-Midamble ::=                  ENUMERATED {
                                        direct,
                                        direct-Inverted }

PRACH-Partitioning ::=              CHOICE {
    fdd                                 SEQUENCE (SIZE (1..maxASC)) OF
    -- TABULAR: If only "NumASC+1" (with, NumASC+1 < maxASC) ASCSetting-FDD are listed,
    -- the remaining (NumASC+2 through maxASC) ASCs are unspecified.
                                            ASCSetting-FDD,
```

```
    tdd                                 SEQUENCE (SIZE (1..maxASC)) OF
    -- TABULAR: If only "NumASC+1" (with, NumASC+1 < maxASC) ASCSetting-TDD are listed,
    -- the remaining (NumASC+2 through maxASC) ASCs are unspecified.
                                        ASCSetting-TDD
}

PRACH-Partitioning-r7 ::=           CHOICE {
    fdd                                 SEQUENCE (SIZE (1..maxASC)) OF
    -- TABULAR: If only "NumASC+1" (with, NumASC+1 < maxASC) ASCSetting-FDD are listed,
    -- the remaining (NumASC+2 through maxASC) ASCs are unspecified.
                                        ASCSetting-FDD,
    tdd                                 SEQUENCE (SIZE (1..maxASC)) OF
    -- TABULAR: If only "NumASC+1" (with, NumASC+1 < maxASC) ASCSetting-TDD are listed,
    -- the remaining (NumASC+2 through maxASC) ASCs are unspecified.
                                        ASCSetting-TDD-r7
}

PRACH-Partitioning-LCR-r4 ::=       SEQUENCE (SIZE (1..maxASC)) OF
    -- TABULAR: If only "NumASC+1" (with, NumASC+1 < maxASC) ASCSetting-TDD-LCR-r4 are listed,
    -- the remaining (NumASC+2 through maxASC) ASCs are unspecified.
                                        ASCSetting-TDD-LCR-r4

PRACH-PowerOffset ::=               SEQUENCE {
    powerRampStep                       PowerRampStep,
    preambleRetransMax                  PreambleRetransMax
}

PRACH-RACH-Info ::=                 SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            availableSignatures                 AvailableSignatures,
            availableSF                         SF-PRACH,
            preambleScramblingCodeWordNumber    PreambleScramblingCodeWordNumber,
            puncturingLimit                     PuncturingLimit,
            availableSubChannelNumbers          AvailableSubChannelNumbers
        },
        tdd                                 SEQUENCE {
            timeslot                            TimeslotNumber,
            channelisationCodeList              TDD-PRACH-CCodeList,
            prach-Midamble                      PRACH-Midamble
        }
    }
}

PRACH-RACH-Info-r7 ::=              SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            availableSignatures                 AvailableSignatures,
            availableSF                         SF-PRACH,
            preambleScramblingCodeWordNumber    PreambleScramblingCodeWordNumber,
            puncturingLimit                     PuncturingLimit,
            availableSubChannelNumbers          AvailableSubChannelNumbers
        },
        tdd384                                  SEQUENCE {
            timeslot                            TimeslotNumber,
            channelisationCodeList              TDD-PRACH-CCodeList,
            prach-Midamble                      PRACH-Midamble
        },
        tdd768                                  SEQUENCE {
            timeslot                            TimeslotNumber,
            channelisationCodeList              TDD768-PRACH-CCodeList,
            prach-Midamble                      PRACH-Midamble
        }
    }
}

PRACH-RACH-Info-LCR-r4 ::=          SEQUENCE {
    sync-UL-Info                        SYNC-UL-Info-r4,
    prach-DefinitionList                SEQUENCE (SIZE (1..maxPRACH-FPACH)) OF
                                            PRACH-Definition-LCR-r4
}

PRACH-SystemInformation ::=         SEQUENCE {
    prach-RACH-Info                     PRACH-RACH-Info,
    transportChannelIdentity            TransportChannelIdentity,
    rach-TransportFormatSet             TransportFormatSet                  OPTIONAL,
    rach-TFCS                           TFCS                                OPTIONAL,
    prach-Partitioning                  PRACH-Partitioning                  OPTIONAL,
```

```
    persistenceScalingFactorList        PersistenceScalingFactorList        OPTIONAL,
    ac-To-ASC-MappingTable              AC-To-ASC-MappingTable              OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            constantValue                       ConstantValue               OPTIONAL,
            prach-PowerOffset                   PRACH-PowerOffset           OPTIONAL,
            rach-TransmissionParameters         RACH-TransmissionParameters OPTIONAL,
            aich-Info                           AICH-Info                   OPTIONAL
        },
        tdd                                 NULL
    }
}

PRACH-SystemInformation-r7 ::=      SEQUENCE {
    prach-RACH-Info                     PRACH-RACH-Info-r7,
    transportChannelIdentity            TransportChannelIdentity,
    rach-TransportFormatSet             TransportFormatSet                  OPTIONAL,
    rach-TFCS                           TFCS                                OPTIONAL,
    prach-Partitioning                  PRACH-Partitioning-r7               OPTIONAL,
    persistenceScalingFactorList        PersistenceScalingFactorList        OPTIONAL,
    ac-To-ASC-MappingTable              AC-To-ASC-MappingTable              OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            constantValue                       ConstantValue               OPTIONAL,
            prach-PowerOffset                   PRACH-PowerOffset           OPTIONAL,
            rach-TransmissionParameters         RACH-TransmissionParameters OPTIONAL,
            aich-Info                           AICH-Info                   OPTIONAL
        },
        tdd                                 NULL
    }
}

PRACH-SystemInformation-LCR-r4 ::=  SEQUENCE {
    prach-RACH-Info-LCR                 PRACH-RACH-Info-LCR-r4,
    rach-TransportFormatSet-LCR         TransportFormatSet-LCR          OPTIONAL,
    prach-Partitioning-LCR              PRACH-Partitioning-LCR-r4       OPTIONAL
}

PRACH-SystemInformationList ::=     SEQUENCE (SIZE (1..maxPRACH)) OF
                                        PRACH-SystemInformation

PRACH-SystemInformationList-r7 ::=  SEQUENCE (SIZE (1..maxPRACH)) OF
                                        PRACH-SystemInformation-r7

PRACH-SystemInformationList-LCR-r4 ::=  SEQUENCE (SIZE (1..maxPRACH)) OF
                                            PRACH-SystemInformation-LCR-r4

PreambleRetransMax ::=              INTEGER (1..64)

PreambleScramblingCodeWordNumber ::=    INTEGER (0..15)

PreDefPhyChConfiguration ::=        SEQUENCE {
    ul-DPCH-InfoPredef                  UL-DPCH-InfoPredef,
    dl-CommonInformationPredef          DL-CommonInformationPredef  OPTIONAL
}

PrimaryCCPCH-Info ::=               CHOICE {
    fdd                                 SEQUENCE {
        tx-DiversityIndicator               BOOLEAN
    },
    tdd                                 SEQUENCE {
        -- syncCase should be ignored for 1.28Mcps TDD mode
        syncCase                            CHOICE {
            syncCase1                           SEQUENCE {
                timeslot                            TimeslotNumber
            },
            syncCase2                           SEQUENCE {
                timeslotSync2                       TimeslotSync2
            }
        }                                                               OPTIONAL,
        cellParametersID                CellParametersID                OPTIONAL,
        sctd-Indicator                  BOOLEAN
    }
}

PrimaryCCPCH-Info-r4 ::=            CHOICE {
```

```
    fdd                                 SEQUENCE {
        tx-DiversityIndicator               BOOLEAN
    },
    tdd                                 SEQUENCE {
        tddOption                           CHOICE {
            tdd384                              SEQUENCE {
                syncCase                            CHOICE {
                    syncCase1                           SEQUENCE {
                        timeslot                            TimeslotNumber
                    },
                    syncCase2                           SEQUENCE {
                        timeslotSync2                       TimeslotSync2
                    }
                }                                                           OPTIONAL
            },
            tdd128                              SEQUENCE {
                tstd-Indicator                      BOOLEAN
            }
        },
        cellParametersID                    CellParametersID                OPTIONAL,
        sctd-Indicator                      BOOLEAN
    }
}

PrimaryCCPCH-Info-r7 ::=            CHOICE {
    fdd                                 SEQUENCE {
        tx-DiversityIndicator               BOOLEAN
    },
    tdd                                 SEQUENCE {
        tddOption                           CHOICE {
            tdd384                              SEQUENCE {
                syncCase                            CHOICE {
                    syncCase1                           SEQUENCE {
                        timeslot                            TimeslotNumber
                    },
                    syncCase2                           SEQUENCE {
                        timeslotSync2                       TimeslotSync2
                    }
                }                                                           OPTIONAL
            },
            tdd768                          SEQUENCE {
                syncCase                            CHOICE {
                    syncCase1                           SEQUENCE {
                        timeslot                            TimeslotNumber
                    },
                    syncCase2                           SEQUENCE {
                        timeslotSync2                       TimeslotSync2
                    }
                }                                                           OPTIONAL
            },
            tdd128                              SEQUENCE {
                tstd-Indicator                      BOOLEAN
            }
        },
        cellParametersID                    CellParametersID                OPTIONAL,
        sctd-Indicator                      BOOLEAN
    }
}

PrimaryCCPCH-Info-LCR-r4 ::=        SEQUENCE {
    tstd-Indicator                      BOOLEAN,
    cellParametersID                    CellParametersID                OPTIONAL,
    sctd-Indicator                      BOOLEAN
}

-- For 1.28Mcps TDD, the following IE includes elements for the PCCPCH Info additional to those
-- in PrimaryCCPCH-Info
PrimaryCCPCH-Info-LCR-r4-ext ::=    SEQUENCE {
    tstd-Indicator                      BOOLEAN
}

PrimaryCCPCH-InfoPost ::=           SEQUENCE {
    syncCase                            CHOICE {
        syncCase1                           SEQUENCE {
            timeslot                            TimeslotNumber
        },
        syncCase2                           SEQUENCE {
            timeslotSync2                       TimeslotSync2
```

```
        }
    },
    cellParametersID                    CellParametersID,
    sctd-Indicator                      BOOLEAN
}

PrimaryCCPCH-InfoPostTDD-LCR-r4 ::= SEQUENCE {
    tstd-Indicator                      BOOLEAN,
    cellParametersID                    CellParametersID,
    sctd-Indicator                      BOOLEAN
}

PrimaryCCPCH-TX-Power ::=           INTEGER (6..43)

PrimaryCPICH-Info ::=               SEQUENCE {
    primaryScramblingCode               PrimaryScramblingCode
}

PrimaryCPICH-TX-Power ::=           INTEGER (-10..50)

PrimaryScramblingCode ::=           INTEGER (0..511)

PuncturingLimit ::=                 ENUMERATED {
                                        pl0-40, pl0-44, pl0-48, pl0-52, pl0-56,
                                        pl0-60, pl0-64, pl0-68, pl0-72, pl0-76,
                                        pl0-80, pl0-84, pl0-88, pl0-92, pl0-96, pl1 }

PUSCH-CapacityAllocationInfo ::=    SEQUENCE {
    pusch-Allocation                    CHOICE {
        pusch-AllocationPending             NULL,
        pusch-AllocationAssignment          SEQUENCE {
            pusch-AllocationPeriodInfo          AllocationPeriodInfo,
            pusch-PowerControlInfo              UL-TargetSIR                OPTIONAL,
            configuration                       CHOICE {
                old-Configuration                   SEQUENCE {
                    tfcs-ID                             TFCS-IdentityPlain          DEFAULT 1,
                    pusch-Identity                      PUSCH-Identity
                },
                new-Configuration                   SEQUENCE {
                    pusch-Info                          PUSCH-Info,
                    pusch-Identity                      PUSCH-Identity      OPTIONAL
                }
            }
        }
    }
}

PUSCH-CapacityAllocationInfo-r4 ::= SEQUENCE {
    pusch-Allocation                    CHOICE {
        pusch-AllocationPending             NULL,
        pusch-AllocationAssignment          SEQUENCE {
            pusch-AllocationPeriodInfo          AllocationPeriodInfo,
            pusch-PowerControlInfo              PUSCH-PowerControlInfo-r4   OPTIONAL,
            configuration                       CHOICE {
                old-Configuration                   SEQUENCE {
                    tfcs-ID                             TFCS-IdentityPlain          DEFAULT 1,
                    pusch-Identity                      PUSCH-Identity
                },
                new-Configuration                   SEQUENCE {
                    pusch-Info                          PUSCH-Info-r4,
                    pusch-Identity                      PUSCH-Identity      OPTIONAL
                }
            }
        }
    }
}

PUSCH-CapacityAllocationInfo-r7 ::= SEQUENCE {
    pusch-Allocation                    CHOICE {
        pusch-AllocationPending             NULL,
        pusch-AllocationAssignment          SEQUENCE {
            pusch-AllocationPeriodInfo          AllocationPeriodInfo,
            pusch-PowerControlInfo              PUSCH-PowerControlInfo-r7   OPTIONAL,
            configuration                       CHOICE {
                old-Configuration                   SEQUENCE {
                    tfcs-ID                             TFCS-IdentityPlain          DEFAULT 1,
                    pusch-Identity                      PUSCH-Identity
                },
```

```
                new-Configuration                   SEQUENCE {
                    pusch-Info                          PUSCH-Info-VHCR,
                    pusch-Identity                      PUSCH-Identity      OPTIONAL
                }
            }
        }
    }
}

PUSCH-Identity ::=                  INTEGER (1..hiPUSCHidentities)

PUSCH-Info ::=                      SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    pusch-TimeslotsCodes                UplinkTimeslotsCodes                OPTIONAL
}

PUSCH-Info-r4 ::=                   SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    tddOption                           CHOICE {
        tdd384                              SEQUENCE {
            pusch-TimeslotsCodes                UplinkTimeslotsCodes        OPTIONAL
        },
        tdd128                              SEQUENCE {
            pusch-TimeslotsCodes                UplinkTimeslotsCodes-LCR-r4 OPTIONAL
        }
    }
}

PUSCH-Info-VHCR ::=                 SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    pusch-TimeslotsCodes-VHCR           UplinkTimeslotsCodes-VHCR           OPTIONAL
}

PUSCH-Info-LCR-r4 ::=               SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,

    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    pusch-TimeslotsCodes                UplinkTimeslotsCodes-LCR-r4         OPTIONAL
}

PUSCH-PowerControlInfo-r4 ::=       SEQUENCE {
    -- The IE ul-TargetSIR corresponds to PRX-PUSCHdes for 1.28Mcps TDD
    -- Actual value PRX-PUSCHdes = (value of IE "ul-TargetSIR" - 120)
    ul-TargetSIR                        UL-TargetSIR,
    tddOption                           CHOICE {
        tdd384                              NULL,
        tdd128                              SEQUENCE {
            tpc-StepSize                        TPC-StepSizeTDD             OPTIONAL
        }
    }
}

PUSCH-PowerControlInfo-r7 ::=       SEQUENCE {
    -- The IE ul-TargetSIR corresponds to PRX-PUSCHdes for 1.28Mcps TDD
    -- Actual value PRX-PUSCHdes = (value of IE "ul-TargetSIR" - 120)
    ul-TargetSIR                        UL-TargetSIR,
    tddOption                           CHOICE {
        tdd384                              NULL,
        tdd768                              NULL,
        tdd128                              SEQUENCE {
            tpc-StepSize                        TPC-StepSizeTDD             OPTIONAL
        }
    }
}

PUSCH-SysInfo ::=                   SEQUENCE {
    pusch-Identity                      PUSCH-Identity,
    pusch-Info                          PUSCH-Info,
    usch-TFS                            TransportFormatSet                  OPTIONAL,
    usch-TFCS                           TFCS                                OPTIONAL
}

PUSCH-SysInfo-VHCR ::=                  SEQUENCE {
    pusch-Identity                      PUSCH-Identity,
    pusch-Info-VHCR                     PUSCH-Info-VHCR,
```

```
    usch-TransportChannelsInfo          USCH-TransportChannelsInfo          OPTIONAL,
    usch-TFCS                           TFCS                                OPTIONAL
}

PUSCH-SysInfo-HCR-r5 ::=                    SEQUENCE {
    pusch-Identity                      PUSCH-Identity,
    pusch-Info                          PUSCH-Info,
    usch-TransportChannelsInfo          USCH-TransportChannelsInfo          OPTIONAL,
    usch-TFCS                           TFCS                                OPTIONAL
}

PUSCH-SysInfo-LCR-r4 ::=            SEQUENCE {
    pusch-Identity                      PUSCH-Identity,
    pusch-Info                          PUSCH-Info-LCR-r4,
    usch-TFS                            TransportFormatSet                  OPTIONAL,
    usch-TFCS                           TFCS                                OPTIONAL
}

PUSCH-SysInfoList ::=               SEQUENCE (SIZE (1..maxPUSCH)) OF
                                        PUSCH-SysInfo

PUSCH-SysInfoList-HCR-r5 ::=            SEQUENCE (SIZE (1..maxPUSCH)) OF PUSCH-SysInfo-HCR-r5

PUSCH-SysInfoList-LCR-r4 ::=        SEQUENCE (SIZE (1..maxPUSCH)) OF
                                        PUSCH-SysInfo-LCR-r4

PUSCH-SysInfoList-SFN ::=           SEQUENCE (SIZE (1..maxPUSCH)) OF
                                        SEQUENCE {
    pusch-SysInfo                           PUSCH-SysInfo,
    sfn-TimeInfo                            SFN-TimeInfo                    OPTIONAL
}

PUSCH-SysInfoList-SFN-HCR-r5 ::=            SEQUENCE (SIZE (1..maxPUSCH)) OF
                                        SEQUENCE {
    pusch-SysInfo                           PUSCH-SysInfo-HCR-r5,
    sfn-TimeInfo                            SFN-TimeInfo                    OPTIONAL
}

PUSCH-SysInfoList-SFN-LCR-r4 ::=        SEQUENCE (SIZE (1..maxPUSCH)) OF
                                        SEQUENCE {
    pusch-SysInfo                           PUSCH-SysInfo-LCR-r4,
    sfn-TimeInfo                            SFN-TimeInfo                    OPTIONAL
}

PUSCH-SysInfoList-SFN-VHCR ::=      SEQUENCE (SIZE (1..maxPUSCH)) OF
                                        SEQUENCE {
    pusch-SysInfo-VHCR                      PUSCH-SysInfo-VHCR,
    sfn-TimeInfo                            SFN-TimeInfo                    OPTIONAL
}

RACH-TransmissionParameters ::=     SEQUENCE {
    mmax                                INTEGER (1..32),
    nb01Min                             NB01,
    nb01Max                             NB01
}

ReducedScramblingCodeNumber ::=     INTEGER (0..8191)

Reference-Beta-QPSK ::=             SEQUENCE {
    reference-Code-Rate                 INTEGER (0..10),
    reference-Beta                      INTEGER (-15..16)
}

Reference-Beta-16QAM ::=            SEQUENCE {
    reference-Code-Rate                 INTEGER (0..10),
    reference-Beta                      INTEGER (-15..16)
}

RepetitionPeriodAndLength ::=       CHOICE {
    repetitionPeriod1                   NULL,
    -- repetitionPeriod2 could just as well be NULL also.
    repetitionPeriod2                   INTEGER (1..1),
    repetitionPeriod4                   INTEGER (1..3),
    repetitionPeriod8                   INTEGER (1..7),
    repetitionPeriod16                  INTEGER (1..15),
    repetitionPeriod32                  INTEGER (1..31),
    repetitionPeriod64                  INTEGER (1..63)
}
```

```
RepetitionPeriodLengthAndOffset ::= CHOICE {
    repetitionPeriod1                   NULL,
    repetitionPeriod2                   SEQUENCE {
        length                              NULL,
        offset                              INTEGER (0..1)
    },
    repetitionPeriod4                   SEQUENCE {
        length                              INTEGER (1..3),
        offset                              INTEGER (0..3)
    },
    repetitionPeriod8                   SEQUENCE {
        length                              INTEGER (1..7),
        offset                              INTEGER (0..7)
    },
    repetitionPeriod16                  SEQUENCE {
        length                              INTEGER (1..15),
        offset                              INTEGER (0..15)
    },
    repetitionPeriod32                  SEQUENCE {
        length                              INTEGER (1..31),
        offset                              INTEGER (0..31)
    },
    repetitionPeriod64                  SEQUENCE {
        length                              INTEGER (1..63),
        offset                              INTEGER (0..63)
    }
}

ReplacedPDSCH-CodeInfo ::=          SEQUENCE {
    tfci-Field2                         MaxTFCI-Field2Value,
    spreadingFactor                     SF-PDSCH,
    codeNumber                          CodeNumberDSCH,
    multiCodeInfo                       MultiCodeInfo
}

ReplacedPDSCH-CodeInfoList ::=      SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
                                        ReplacedPDSCH-CodeInfo

RepPerLengthOffset-PICH ::=         CHOICE {
    rpp4-2                              INTEGER (0..3),
    rpp8-2                              INTEGER (0..7),
    rpp8-4                              INTEGER (0..7),
    rpp16-2                             INTEGER (0..15),
    rpp16-4                             INTEGER (0..15),
    rpp32-2                             INTEGER (0..31),
    rpp32-4                             INTEGER (0..31),
    rpp64-2                             INTEGER (0..63),
    rpp64-4                             INTEGER (0..63)
}

RepPerLengthOffset-MICH ::=         CHOICE {
    rpp4-2                              INTEGER (0..3),
    rpp8-2                              INTEGER (0..7),
    rpp8-4                              INTEGER (0..7),
    rpp16-2                             INTEGER (0..15),
    rpp16-4                             INTEGER (0..15),
    rpp32-2                             INTEGER (0..31),
    rpp32-4                             INTEGER (0..31),
    rpp64-2                             INTEGER (0..63),
    rpp64-4                             INTEGER (0..63)
}

RestrictedTrCH ::=                  SEQUENCE {
    dl-restrictedTrCh-Type              DL-TrCH-Type,
    restrictedDL-TrCH-Identity          TransportChannelIdentity,
    allowedTFIList                      AllowedTFI-List
}

RestrictedTrCH-InfoList ::=         SEQUENCE (SIZE(1..maxTrCH)) OF
                                        RestrictedTrCH

RL-AdditionInformation ::=          SEQUENCE {
    primaryCPICH-Info                   PrimaryCPICH-Info,
    dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL,
    -- dummy and dummy2 are not used in this version of specification
    -- and the IEs should be ignored.
    dummy                               BOOLEAN,
```

```
    dummy2                              SCCPCH-InfoForFACH                  OPTIONAL
}

RL-AdditionInformation-r6 ::=       SEQUENCE {
    primaryCPICH-Info                   PrimaryCPICH-Info,
    cell-Id                             CellIdentity                        OPTIONAL,
    dl-dpchInfo                         CHOICE {
        dl-DPCH-InfoPerRL                   DL-DPCH-InfoPerRL-r5,
        dl-FDPCH-InfoPerRL                  DL-FDPCH-InfoPerRL-r6
    },
    e-HICH-Information                  E-HICH-Information                  OPTIONAL,
    e-RGCH-Information                  E-RGCH-Information                  OPTIONAL
}

RL-AdditionInformation-v6b0ext ::=  SEQUENCE {
        sttdIndication                  STTDIndication                      OPTIONAL
}

RL-AdditionInformationList ::=      SEQUENCE (SIZE (1..maxRL-1)) OF
                                        RL-AdditionInformation

RL-AdditionInformationList-r6 ::=   SEQUENCE (SIZE (1..maxRL-1)) OF
                                        RL-AdditionInformation-r6


RL-AdditionInformation-list-v6b0ext ::= SEQUENCE (SIZE (1..maxRL)) OF
                                        RL-AdditionInformation-v6b0ext

RL-IdentifierList ::=               SEQUENCE (SIZE (1..maxRL)) OF
                                        PrimaryCPICH-Info

RL-RemovalInformationList ::=       SEQUENCE (SIZE (1..maxRL)) OF
                                        PrimaryCPICH-Info

RPP ::=                             ENUMERATED {
                                        mode0, mode1 }

S-Field ::=                         ENUMERATED {
                                        e1bit, e2bits }

SCCPCH-ChannelisationCode ::=       ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16 }

SCCPCH-ChannelisationCode-VHCR ::=  ENUMERATED {
                                        cc32-1, cc32-2, cc32-3, cc32-4,
                                        cc32-5, cc32-6, cc32-7, cc32-8,
                                        cc32-9, cc32-10, cc32-11, cc32-12,
                                        cc32-13, cc32-14, cc32-15, cc32-16,
                                        cc32-17, cc32-18, cc32-19, cc32-20,
                                        cc32-21, cc32-22, cc32-23, cc32-24,
                                        cc32-25, cc32-26, cc32-27, cc32-28,
                                        cc32-29, cc32-30, cc32-31, cc32-32 }

SCCPCH-ChannelisationCodeList ::=   SEQUENCE (SIZE (1..16)) OF
                                        SCCPCH-ChannelisationCode

SCCPCH-ChannelisationCodeList-VHCR ::= SEQUENCE (SIZE (1..32)) OF
                                        SCCPCH-ChannelisationCode-VHCR

SCCPCH-InfoForFACH ::=              SEQUENCE {
    secondaryCCPCH-Info                 SecondaryCCPCH-Info,
    tfcs                                TFCS,
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            fach-PCH-InformationList            FACH-PCH-InformationList,
            sib-ReferenceListFACH               SIB-ReferenceListFACH
        },
        tdd                             SEQUENCE {
            fach-PCH-InformationList            FACH-PCH-InformationList
        }
    }
}

SCCPCH-InfoForFACH-r4 ::=           SEQUENCE {
    secondaryCCPCH-Info             SecondaryCCPCH-Info-r4,
```

```
    tfcs                                TFCS,
    fach-PCH-InformationList            FACH-PCH-InformationList,
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            sib-ReferenceListFACH           SIB-ReferenceListFACH
        },
        tdd                             NULL
    }
}

SCCPCH-SystemInformation ::=        SEQUENCE {
    secondaryCCPCH-Info                 SecondaryCCPCH-Info,
    tfcs                                TFCS                                OPTIONAL,
    fach-PCH-InformationList            FACH-PCH-InformationList            OPTIONAL,
    pich-Info                           PICH-Info                           OPTIONAL
}

SCCPCH-SystemInformation-LCR-r4-ext ::= SEQUENCE {
    secondaryCCPCH-LCR-Extensions   SecondaryCCPCH-Info-LCR-r4-ext,
    -- pich-Info in the SCCPCH-SystemInformation IE shall be absent,
    -- and instead the following used.
    pich-Info                       PICH-Info-LCR-r4                        OPTIONAL
}

SCCPCH-SystemInformation-r7 ::=     SEQUENCE {
    secondaryCCPCH-Info                 SecondaryCCPCH-Info-r7,
    tfcs                                TFCS                                OPTIONAL,
    fach-PCH-InformationList            FACH-PCH-InformationList            OPTIONAL,
    pich-Info                           PICH-Info-r7                        OPTIONAL
}

SCCPCH-SystemInformationList ::=    SEQUENCE (SIZE (1..maxSCCPCH)) OF
                                        SCCPCH-SystemInformation

SCCPCH-SystemInformationList-r7 ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
                                        SCCPCH-SystemInformation-r7

-- SCCPCH-SystemInformationList-LCR-r4-ext includes elements additional to those in
-- SCCPCH-SystemInformationList for the 1.28Mcps TDD. The order of the IEs
-- indicates which SCCPCH-SystemInformation-LCR-r4-ext IE extends which
-- SCCPCH-SystemInformation IE.
SCCPCH-SystemInformationList-LCR-r4-ext ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
                                                SCCPCH-SystemInformation-LCR-r4-ext

-- The SCCPCH-SystemInformation-MBMS-r6 is used for an S-CCPCH dedicated for MBMS purposes.
SCCPCH-SystemInformation-MBMS-r6 ::= SEQUENCE {
    secondaryCCPCHInfo-MBMS             SecondaryCCPCHInfo-MBMS-r6,
    transportFormatCombinationSet       TFCS,
    fachCarryingMCCH                    SEQUENCE {
        mcch-transportFormatSet             TransportFormatSet,
        mcch-ConfigurationInfo              MBMS-MCCH-ConfigurationInfo-r6
    },
    fachCarryingMTCH-List               MBMS-FACHCarryingMTCH-List          OPTIONAL,
    -- If schedulingInformation is provided
    fachCarryingMSCH                    SEQUENCE {
        msch-transportFormatSet             TransportFormatSet,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                               MBMS-MSCH-ConfigurationInfo-r6
    }       OPTIONAL
}

-- The SCCPCH-SystemInformation-MBMS-r7 is used for an S-CCPCH dedicated for MBMS purposes.
SCCPCH-SystemInformation-MBMS-r7 ::= SEQUENCE {
    secondaryCCPCHInfo-MBMS             SecondaryCCPCHInfo-MBMS-r7,
    transportFormatCombinationSet       TFCS,
    fachCarryingMCCH                    SEQUENCE {
        mcch-transportFormatSet             TransportFormatSet,
        mcch-ConfigurationInfo              MBMS-MCCH-ConfigurationInfo-r6
    },
    fachCarryingMTCH-List               MBMS-FACHCarryingMTCH-List          OPTIONAL,
    -- If schedulingInformation is provided
    fachCarryingMSCH                    SEQUENCE {
        msch-transportFormatSet             TransportFormatSet,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                               MBMS-MSCH-ConfigurationInfo-r6
    }       OPTIONAL
```

```
}

ScramblingCodeChange ::=            ENUMERATED {
                                        codeChange, noCodeChange }

ScramblingCodeType ::=              ENUMERATED {
                                        shortSC,
                                        longSC }

SecondaryCCPCH-Info ::=             SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            -- dummy1 is not used in this version of the specification and should be ignored.
            dummy1                          PCPICH-UsageForChannelEst,
            -- dummy2 is not used in this version of the specification.  It should not
            -- be sent and if received it should be ignored.
            dummy2                          SecondaryCPICH-Info             OPTIONAL,
            secondaryScramblingCode         SecondaryScramblingCode         OPTIONAL,
            sttd-Indicator                  BOOLEAN,
            sf-AndCodeNumber                SF256-AndCodeNumber,
            pilotSymbolExistence            BOOLEAN,
            tfci-Existence                  BOOLEAN,
            positionFixedOrFlexible         PositionFixedOrFlexible,
            timingOffset                    TimingOffset                    DEFAULT 0
        },
        tdd                             SEQUENCE {
            -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
            commonTimeslotInfo              CommonTimeslotInfoSCCPCH,
            individualTimeslotInfo          IndividualTimeslotInfo,
            channelisationCode              SCCPCH-ChannelisationCodeList
        }
    }
}

SecondaryCCPCH-Info-r4 ::=      SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            secondaryScramblingCode         SecondaryScramblingCode         OPTIONAL,
            sttd-Indicator                  BOOLEAN,
            sf-AndCodeNumber                SF256-AndCodeNumber,
            pilotSymbolExistence            BOOLEAN,
            tfci-Existence                  BOOLEAN,
            positionFixedOrFlexible         PositionFixedOrFlexible,
            timingOffset                    TimingOffset                    DEFAULT 0
        },
        tdd                             SEQUENCE {
            -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
            commonTimeslotInfo              CommonTimeslotInfoSCCPCH,
            tddOption                       CHOICE {
                tdd384                          SEQUENCE {
                    individualTimeslotInfo          IndividualTimeslotInfo
                },
                tdd128                          SEQUENCE {
                    individualTimeslotInfo          IndividualTimeslotInfo-LCR-r4
                }
            },
            channelisationCode              SCCPCH-ChannelisationCodeList
        }
    }
}

SecondaryCCPCH-Info-r7 ::=      SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            secondaryScramblingCode         SecondaryScramblingCode         OPTIONAL,
            sttd-Indicator                  BOOLEAN,
            sf-AndCodeNumber                SF256-AndCodeNumber,
            pilotSymbolExistence            BOOLEAN,
            tfci-Existence                  BOOLEAN,
            positionFixedOrFlexible         PositionFixedOrFlexible,
            timingOffset                    TimingOffset                    DEFAULT 0
        },
        tdd                             SEQUENCE {
            -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
            commonTimeslotInfo              CommonTimeslotInfoSCCPCH,
            tddOption                       CHOICE {
                tdd384                          SEQUENCE {
                    individualTimeslotInfo          IndividualTimeslotInfo,
```

```
                    channelisationCode              SCCPCH-ChannelisationCodeList
                },
                tdd768                          SEQUENCE {
                    individualTimeslotInfo          IndividualTimeslotInfo-VHCR,
                    channelisationCode              SCCPCH-ChannelisationCodeList-VHCR
                },
                tdd128                          SEQUENCE {
                    individualTimeslotInfo          IndividualTimeslotInfo-LCR-r4,
                    channelisationCode              SCCPCH-ChannelisationCodeList
                }
            }
        }
    }
}

SecondaryCCPCH-Info-LCR-r4-ext ::=  SEQUENCE {
    individualTimeslotLCR-Ext           IndividualTimeslotInfo-LCR-r4-ext
}

SecondaryCCPCHInfo-MBMS-r6 ::=      SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            secondaryScramblingCode         SecondaryScramblingCode         OPTIONAL,
            sttd-Indicator                  BOOLEAN,
            sf-AndCodeNumber                SF256-AndCodeNumber,
            timingOffset                    TimingOffset                    DEFAULT 0
        },
        tdd384                          SEQUENCE {
            commonTimeslotInfoMBMS          CommonTimeslotInfoMBMS,
            downlinkTimeslotsCodes          DownlinkTimeslotsCodes
        },
        tdd128                          SEQUENCE {
            commonTimeslotInfoMBMS          CommonTimeslotInfoMBMS,
            downlinkTimeslotsCodes          DownlinkTimeslotsCodes-LCR-r4
        }
    }
}

SecondaryCCPCHInfo-MBMS-r7 ::=      SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            secondaryScramblingCode         SecondaryScramblingCode         OPTIONAL,
            sttd-Indicator                  BOOLEAN,
            sf-AndCodeNumber                SF256-AndCodeNumber,
            timingOffset                    TimingOffset                    DEFAULT 0
        },
        tdd384                          SEQUENCE {
            commonTimeslotInfoMBMS          CommonTimeslotInfoMBMS,
            downlinkTimeslotsCodes          DownlinkTimeslotsCodes
        },
        tdd768                          SEQUENCE {
            commonTimeslotInfoMBMS          CommonTimeslotInfoMBMS,
            downlinkTimeslotsCodes          DownlinkTimeslotsCodes-VHCR
        },
        tdd128                          SEQUENCE {
            commonTimeslotInfoMBMS          CommonTimeslotInfoMBMS,
            downlinkTimeslotsCodes          DownlinkTimeslotsCodes-LCR-r4
        }
    }
}

SecondaryCPICH-Info ::=             SEQUENCE {
    secondaryDL-ScramblingCode          SecondaryScramblingCode             OPTIONAL,
    channelisationCode                  ChannelisationCode256
}

SecondaryScramblingCode ::=         INTEGER (1..15)

SecondInterleavingMode ::=          ENUMERATED {
                                        frameRelated, timeslotRelated }

SF8Codes ::=                        ENUMERATED {
                                        cc8-1, cc8-2, cc8-3, cc8-4, cc8-5, cc8-6,  cc8-7, cc8-8}

SF16Codes ::=                       ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4, cc16-5, cc16-6, cc16-7,
                                        cc16-8}
```

```
SF16Codes2 ::=                      ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4, cc16-5, cc16-6, cc16-7,
                                        cc16-8, cc16-9, cc16-10, cc16-11, cc16-12, cc16-13, cc16-14,
                                        cc16-15, cc16-16}

SF32Codes ::=                       ENUMERATED {
                                        cc32-1, cc32-2, cc32-3, cc32-4, cc32-5, cc32-6, cc32-7,
                                        cc32-8, cc32-9, cc32-10, cc32-11, cc32-12, cc32-13, cc32-14,
                                        cc32-15, cc32-16}

-- SF256-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF256-AndCodeNumber ::=             CHOICE {
    sf4                                 INTEGER (0..3),
    sf8                                 INTEGER (0..7),
    sf16                                INTEGER (0..15),
    sf32                                INTEGER (0..31),
    sf64                                INTEGER (0..63),
    sf128                               INTEGER (0..127),
    sf256                               INTEGER (0..255)
}

-- SF512-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF512-AndCodeNumber ::=             CHOICE {
    sf4                                 INTEGER (0..3),
    sf8                                 INTEGER (0..7),
    sf16                                INTEGER (0..15),
    sf32                                INTEGER (0..31),
    sf64                                INTEGER (0..63),
    sf128                               INTEGER (0..127),
    sf256                               INTEGER (0..255),
    sf512                               INTEGER (0..511)
}

-- SF512-AndPilot encodes both "Spreading factor" and "Number of bits for Pilot bits"
SF512-AndPilot ::=                  CHOICE {
    sfd4                                NULL,
    sfd8                                NULL,
    sfd16                               NULL,
    sfd32                               NULL,
    sfd64                               NULL,
    sfd128                              PilotBits128,
    sfd256                              PilotBits256,
    sfd512                              NULL
}
SF-PDSCH ::=                        ENUMERATED {
                                        sfp4, sfp8, sfp16, sfp32,
                                        sfp64, sfp128, sfp256 }

SF-PRACH ::=                        ENUMERATED {
                                        sfpr32, sfpr64, sfpr128, sfpr256 }

SFN-TimeInfo ::=                    SEQUENCE {
    activationTimeSFN                   INTEGER (0..4095),
    physChDuration                  DurationTimeInfo
}

-- actual scheduling value = 2^(signalled value +1) and is the periodicity of sending special burst frames
SpecialBurstScheduling ::=              INTEGER (0..7)

SpreadingFactor ::=                 ENUMERATED {
                                        sf4, sf8, sf16, sf32,
                                        sf64, sf128, sf256 }

SRB-delay ::=                       INTEGER (0..7)

SSDT-CellIdentity ::=               ENUMERATED {
                                        ssdt-id-a, ssdt-id-b, ssdt-id-c,
                                        ssdt-id-d, ssdt-id-e, ssdt-id-f,
                                        ssdt-id-g, ssdt-id-h }

SSDT-Information ::=                SEQUENCE {
    s-Field                             S-Field,
    codeWordSet                         CodeWordSet
}

SSDT-Information-r4 ::=             SEQUENCE {
    s-Field                             S-Field,
    codeWordSet                         CodeWordSet,
```

```
    ssdt-UL-r4                          SSDT-UL                                 OPTIONAL
}

SSDT-UL ::=                             ENUMERATED {
                                        ul, ul-AndDL }

STTDIndication ::=                      ENUMERATED { true }

SynchronisationParameters-r4 ::=        SEQUENCE {
    sync-UL-CodesBitmap                     BIT STRING {
                                            code7(0),
                                            code6(1),
                                            code5(2),
                                            code4(3),
                                            code3(4),
                                            code2(5),
                                            code1(6),
                                            code0(7)
                                            } (SIZE (8)),
    fpach-Info                          FPACH-Info-r4,
    -- Actual value prxUpPCHdes = IE value - 120
    prxUpPCHdes                         INTEGER (0..62),
    sync-UL-Procedure                   SYNC-UL-Procedure-r4                    OPTIONAL
}

SYNC-UL-Procedure-r4 ::=                SEQUENCE {
    max-SYNC-UL-Transmissions           ENUMERATED { tr1, tr2, tr4, tr8 },
    powerRampStep                       INTEGER (0..3)
}

SYNC-UL-Info-r4 ::=                     SEQUENCE {
    sync-UL-Codes-Bitmap                BIT STRING {
                                            code7(0),
                                            code6(1),
                                            code5(2),
                                            code4(3),
                                            code3(4),
                                            code2(5),
                                            code1(6),
                                            code0(7)
                                            } ( SIZE (8)),
    -- Actual value prxUpPCHdes = IE value - 120
    prxUpPCHdes                         INTEGER (0..62),
    powerRampStep                       INTEGER (0..3),
    max-SYNC-UL-Transmissions           ENUMERATED { tr1, tr2, tr4, tr8 } ,
    mmax                                INTEGER(1..32)
}

TDD-FPACH-CCode16-r4 ::=                ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-UL-Interference ::=                 INTEGER (-110..-52)

TDD-PICH-CCode ::=                      ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16 }

TDD768-PICH-CCode ::=                   ENUMERATED {
                                        cc32-1, cc32-2, cc32-3, cc32-4,
                                        cc32-5, cc32-6, cc32-7, cc32-8,
                                        cc32-9, cc32-10, cc32-11, cc32-12,
                                        cc32-13, cc32-14, cc32-15, cc32-16,
                                        cc32-17, cc32-18, cc32-19, cc32-20,
                                        cc32-21, cc32-22, cc32-23, cc32-24,
                                        cc32-25, cc32-26, cc32-27, cc32-28,
                                        cc32-29, cc32-30, cc32-31, cc32-32 }

TDD-PRACH-CCode8 ::=                    ENUMERATED {
                                        cc8-1, cc8-2, cc8-3, cc8-4,
                                        cc8-5, cc8-6, cc8-7, cc8-8 }

TDD-PRACH-CCode16 ::=                   ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4,
```

```
                                    cc16-5, cc16-6, cc16-7, cc16-8,
                                    cc16-9, cc16-10, cc16-11, cc16-12,
                                    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCode-LCR-r4 ::=          ENUMERATED {
                                    cc4-1, cc4-2, cc4-3, cc4-4,
                                    cc8-1, cc8-2, cc8-3, cc8-4,
                                    cc8-5, cc8-6, cc8-7, cc8-8,
                                    cc16-1, cc16-2, cc16-3, cc16-4,
                                    cc16-5, cc16-6, cc16-7, cc16-8,
                                    cc16-9, cc16-10, cc16-11, cc16-12,
                                    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCodeList ::=             CHOICE {
    sf8                                 SEQUENCE (SIZE (1..8)) OF
                                            TDD-PRACH-CCode8,
-- Channelisation codes cc16-9, cc16-10, cc16-11, cc16-12, cc16-13, cc16-14,
-- cc16-15 and cc16-16 shall not be used
    sf16                                SEQUENCE (SIZE (1..8)) OF
                                            TDD-PRACH-CCode16
}

TDD768-PRACH-CCode16 ::=                ENUMERATED {
                                    cc16-1, cc16-2, cc16-3, cc16-4,
                                    cc16-5, cc16-6, cc16-7, cc16-8,
                                    cc16-9, cc16-10, cc16-11, cc16-12,
                                    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD768-PRACH-CCode32 ::=                ENUMERATED {
                                    cc32-1, cc32-2, cc32-3, cc32-4,
                                    cc32-5, cc32-6, cc32-7, cc32-8,
                                    cc32-9, cc32-10, cc32-11, cc32-12,
                                    cc32-13, cc32-14, cc32-15, cc32-16 }

TDD768-PRACH-CCodeList ::=          CHOICE {
    sf32                                SEQUENCE (SIZE (1..16)) OF
                                            TDD768-PRACH-CCode32,
-- Channelisation codes cc32-17, cc32-18, cc32-19, cc32-20, cc32-21, cc32-22,
-- cc32-23, cc32-24, cc32-25, cc32-26, cc32-27, cc32-28, cc32-29, cc32-30, cc32-31
-- and cc32-32 shall not be used
    sf16                                SEQUENCE (SIZE (1..16)) OF
                                            TDD768-PRACH-CCode16
}

TFC-ControlDuration ::=             ENUMERATED {
                                    tfc-cd1, tfc-cd2, tfc-cd4, tfc-cd8,
                                    tfc-cd16, tfc-cd24, tfc-cd32,
                                    tfc-cd48, tfc-cd64, tfc-cd128,
                                    tfc-cd192, tfc-cd256, tfc-cd512 }

TFCI-Coding ::=                     ENUMERATED {
                                    tfci-bits-4, tfci-bits-8,
                                    tfci-bits-16, tfci-bits-32 }

TGCFN ::=                           INTEGER (0..255)

-- In TGD, value 270 represents "undefined" in the tabular description.
TGD ::=                             INTEGER (15..270)

TGL ::=                             INTEGER (1..14)

TGMP ::=                            ENUMERATED {
                                    tdd-Measurement, fdd-Measurement,
                                    gsm-CarrierRSSIMeasurement,
                                    gsm-initialBSICIdentification, gsmBSICReconfirmation,
                                    multi-carrier }

TGP-Sequence ::=                    SEQUENCE {
    tgpsi                           TGPSI,
    tgps-Status                     CHOICE {
        activate                        SEQUENCE {
            tgcfn                           TGCFN
        },
        deactivate                      NULL
    },
    tgps-ConfigurationParams        TGPS-ConfigurationParams         OPTIONAL
}
```

```
TGPS-Reconfiguration-CFN ::=        INTEGER (0..255)

TGP-SequenceList ::=                SEQUENCE (SIZE (1..maxTGPS)) OF
                                        TGP-Sequence

TGP-SequenceShort ::=               SEQUENCE {
    tgpsi                               TGPSI,
    tgps-Status                         CHOICE {
        activate                            SEQUENCE {
            tgcfn                               TGCFN
        },
        deactivate                          NULL
    }
}

TGPL ::=                            INTEGER (1..144)

-- TABULAR: In TGPRC, value 0 represents "infinity" in the tabular description.
TGPRC ::=                           INTEGER (0..511)

TGPS-ConfigurationParams ::=        SEQUENCE {
    tgmp                                TGMP,
    tgprc                               TGPRC,
    tgsn                                TGSN,
    tgl1                                TGL,
    tgl2                                TGL                                 OPTIONAL,
    tgd                                 TGD,
    tgpl1                               TGPL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it shall be ignored.
    dummy                           TGPL                                OPTIONAL,
    rpp                                 RPP,
    itp                                 ITP,
    -- TABULAR: Compressed mode method is nested inside UL-DL-Mode
    ul-DL-Mode                          UL-DL-Mode,
    dl-FrameType                        DL-FrameType,
    deltaSIR1                           DeltaSIR,
    deltaSIRAfter1                      DeltaSIR,
    deltaSIR2                           DeltaSIR                            OPTIONAL,
    deltaSIRAfter2                      DeltaSIR                            OPTIONAL,
    nidentifyAbort                      NidentifyAbort                      OPTIONAL,
    treconfirmAbort                     TreconfirmAbort                     OPTIONAL
}

TGPSI ::=                           INTEGER (1..maxTGPS)

TGSN ::=                            INTEGER (0..14)

TimeInfo ::=                        SEQUENCE {
    activationTime                      ActivationTime                      OPTIONAL,
    durationTimeInfo                    DurationTimeInfo                    OPTIONAL
}

TimeslotList ::=                    SEQUENCE (SIZE (1..maxTS)) OF
                                        TimeslotNumber

TimeslotList-r4 ::=                 CHOICE {
-- the choice for 7.68 Mcps TDD is as for 3.84 Mcps TDD  --
    tdd384                              SEQUENCE (SIZE (1..maxTS)) OF
                                            TimeslotNumber,
    tdd128                              SEQUENCE (SIZE (1..maxTS-LCR)) OF
                                            TimeslotNumber-LCR-r4
}

-- If TimeslotNumber is included for a 1.28Mcps TDD description, it shall take values from 0..6
TimeslotNumber ::=                  INTEGER (0..14)

TimeslotNumber-LCR-r4 ::=           INTEGER (0..6)

TimeslotNumber-PRACH-LCR-r4 ::=     INTEGER (1..6)

TimeslotSync2 ::=               INTEGER (0..6)

-- Actual value TimingOffset = IE value * 256
TimingOffset ::=                    INTEGER (0..149)

TimingMaintainedSynchInd ::=        ENUMERATED { false }
```

```
TPC-CombinationIndex ::=            INTEGER (0..5)

TPC-CommandTargetRate ::=           INTEGER (0..10)

-- Actual value TPC-StepSizeFDD = IE value + 1
TPC-StepSizeFDD ::=                 INTEGER (0..1)

TPC-StepSizeTDD ::=                 INTEGER (1..3)

-- Actual value TreconfirmAbort = IE value * 0.5 seconds
TreconfirmAbort ::= INTEGER (1..20)

TX-DiversityMode ::=                ENUMERATED {
                                        noDiversity,
                                        sttd,
                                        closedLoopMode1,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
                                        dummy }

UARFCN ::=                      INTEGER (0..16383)

UCSM-Info ::=                       SEQUENCE {
    minimumSpreadingFactor              MinimumSpreadingFactor,
    nf-Max                              NF-Max,
    channelReqParamsForUCSM             ChannelReqParamsForUCSM
}

UL-CCTrCH ::=                       SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    ul-TargetSIR                        UL-TargetSIR,
    timeInfo                            TimeInfo,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes                OPTIONAL
}

UL-CCTrCH-r4 ::=                    SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    -- The IE ul-TargetSIR corresponds to PRX-DPCHdes for 1.28Mcps TDD
    -- Actual value PRX-DPCHdes = (value of IE "ul-TargetSIR" - 120)
    ul-TargetSIR                        UL-TargetSIR,
    timeInfo                            TimeInfo,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    tddOption                           CHOICE {
        tdd384                              SEQUENCE {
            ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes        OPTIONAL
        },
        tdd128                              SEQUENCE {
            ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes-LCR-r4 OPTIONAL
        }
    }
}

UL-CCTrCH-r7 ::=                    SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain                  DEFAULT 1,
    -- The IE ul-TargetSIR corresponds to PRX-DPCHdes for 1.28Mcps TDD
    -- Actual value PRX-DPCHdes = (value of IE "ul-TargetSIR" - 120)
    ul-TargetSIR                        UL-TargetSIR,
    timeInfo                            TimeInfo,
    commonTimeslotInfo                  CommonTimeslotInfo                  OPTIONAL,
    tddOption                           CHOICE {
        tdd384                              SEQUENCE {
            ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes        OPTIONAL
        },
        tdd768                              SEQUENCE {
            ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes-VHCR   OPTIONAL
        },
        tdd128                              SEQUENCE {
            ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes-LCR-r7 OPTIONAL
        }
    }
}

UL-CCTrCHList ::=                   SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        UL-CCTrCH

UL-CCTrCHList-r4 ::=                SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        UL-CCTrCH-r4
```

```
UL-CCTrCHList-r7 ::=                SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        UL-CCTrCH-r7

UL-CCTrCHListToRemove ::=           SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        TFCS-IdentityPlain

UL-CCTrChTPCList ::=                SEQUENCE (SIZE (0..maxCCTrCH)) OF
                                            TFCS-Identity

UL-ChannelRequirement ::=           CHOICE {
    ul-DPCH-Info                        UL-DPCH-Info,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received the UE behaviour is not specified.
    dummy                               CPCH-SetInfo
}

UL-ChannelRequirement-r4 ::=        CHOICE {
    ul-DPCH-Info                        UL-DPCH-Info-r4,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received the UE behaviour is not specified.
    dummy                               CPCH-SetInfo
}

UL-ChannelRequirement-r5 ::=        CHOICE {
    ul-DPCH-Info                        UL-DPCH-Info-r5,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received the UE behaviour is not specified.
    dummy                               CPCH-SetInfo
}

-- Note: the reference to CPCH in the element name below is incorrect. The name is not
-- changed to keep it aligned with R99.
UL-ChannelRequirementWithCPCH-SetID ::= CHOICE {
    ul-DPCH-Info                        UL-DPCH-Info,
    -- dummy1 and dummy 2 are not used in this version of the specification, they should
    -- not be sent and if received the UE behaviour is not specified.
    dummy1                              CPCH-SetInfo,
    dummy2                              CPCH-SetID
}

-- Note: the reference to CPCH in the element name below is incorrect. The name is not
-- changed to keep it aligned with R99.
UL-ChannelRequirementWithCPCH-SetID-r4 ::=  CHOICE {
    ul-DPCH-Info                        UL-DPCH-Info-r4,
    -- dummy1 and dummy2 are not used in this version of the specification, they
    -- should not be sent and if received the UE behaviour is not specified.
    dummy1                              CPCH-SetInfo,
    dummy2                              CPCH-SetID
}

-- Note: the reference to CPCH in the element name below is incorrect. The name is not
-- changed to keep it aligned with R99.
UL-ChannelRequirementWithCPCH-SetID-r5 ::=  CHOICE {
    ul-DPCH-Info                        UL-DPCH-Info-r5,
    -- dummy1 and dummy2 are not used in this version of the specification, they should
    -- not be sent and if received the UE behaviour is not specified.
    dummy1                              CPCH-SetInfo,
    dummy2                              CPCH-SetID
}

UL-CompressedModeMethod ::=         ENUMERATED {
                                        sf-2,
                                        higherLayerScheduling }

UL-DL-Mode ::=                      CHOICE {
    ul                                  UL-CompressedModeMethod,
    dl                                  DL-CompressedModeMethod,
    ul-and-dl                               SEQUENCE {
        ul                                  UL-CompressedModeMethod,
        dl                                  DL-CompressedModeMethod
    }}

UL-DPCCH-SlotFormat ::=             ENUMERATED {
                                        slf0, slf1, slf2 }

UL-DPCH-Info ::=                    SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo            OPTIONAL,
```

```
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            scramblingCodeType                  ScramblingCodeType,
            scramblingCode                      UL-ScramblingCode,
            numberOfDPDCH                       NumberOfDPDCH               DEFAULT 1,
            spreadingFactor                     SpreadingFactor,
            tfci-Existence                      BOOLEAN,
            -- numberOfFBI-Bits is conditional based on history
            numberOfFBI-Bits                    NumberOfFBI-Bits            OPTIONAL,
            puncturingLimit                     PuncturingLimit
        },
        tdd                                 SEQUENCE {
            ul-TimingAdvance                    UL-TimingAdvanceControl     OPTIONAL,
            ul-CCTrCHList                       UL-CCTrCHList               OPTIONAL,
            ul-CCTrCHListToRemove               UL-CCTrCHListToRemove       OPTIONAL
        }
    }
}

UL-DPCH-Info-r4 ::=                 SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo-r4         OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            scramblingCodeType                  ScramblingCodeType,
            scramblingCode                      UL-ScramblingCode,
            numberOfDPDCH                       NumberOfDPDCH               DEFAULT 1,
            spreadingFactor                     SpreadingFactor,
            tfci-Existence                      BOOLEAN,
            -- numberOfFBI-Bits is conditional based on history
            numberOfFBI-Bits                    NumberOfFBI-Bits            OPTIONAL,
            puncturingLimit                     PuncturingLimit
        },
        tdd                                 SEQUENCE {
            ul-TimingAdvance                    UL-TimingAdvanceControl-r4  OPTIONAL,
            ul-CCTrCHList                       UL-CCTrCHList-r4            OPTIONAL,
            ul-CCTrCHListToRemove               UL-CCTrCHListToRemove       OPTIONAL
        }
    }
}

UL-DPCH-Info-r5 ::=                 SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo-r5         OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            scramblingCodeType                  ScramblingCodeType,
            scramblingCode                      UL-ScramblingCode,
            numberOfDPDCH                       NumberOfDPDCH               DEFAULT 1,
            spreadingFactor                     SpreadingFactor,
            tfci-Existence                      BOOLEAN,
            -- numberOfFBI-Bits is conditional based on history
            numberOfFBI-Bits                    NumberOfFBI-Bits            OPTIONAL,
            puncturingLimit                     PuncturingLimit
        },
        tdd                                 SEQUENCE {
            ul-TimingAdvance                    UL-TimingAdvanceControl-r4  OPTIONAL,
            ul-CCTrCHList                       UL-CCTrCHList-r4            OPTIONAL,
            ul-CCTrCHListToRemove               UL-CCTrCHListToRemove       OPTIONAL
        }
    }
}

UL-DPCH-Info-r6 ::=                 SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo-r6         OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            scramblingCodeType                  ScramblingCodeType,
            scramblingCode                      UL-ScramblingCode,
            dpdchPresence                       CHOICE {
                present                             SEQUENCE {
                    numberOfDPDCH                       NumberOfDPDCH               DEFAULT 1,
                    spreadingFactor                     SpreadingFactor,
                    tfci-Existence                      BOOLEAN,
                    -- numberOfFBI-Bits is conditional based on history
                    numberOfFBI-Bits                    NumberOfFBI-Bits            OPTIONAL,
                    puncturingLimit                     PuncturingLimit
                },
                notPresent                          SEQUENCE {
                    tfci-Existence                      BOOLEAN,
```

```
                    -- numberOfFBI-Bits is conditional based on history
                    numberOfFBI-Bits                    NumberOfFBI-Bits            OPTIONAL
                }
            }
        },
        tdd                                 SEQUENCE {
            ul-TimingAdvance                    UL-TimingAdvanceControl-r4  OPTIONAL,
            ul-CCTrCHList                       UL-CCTrCHList-r4            OPTIONAL,
            ul-CCTrCHListToRemove               UL-CCTrCHListToRemove       OPTIONAL
        }
    }
}

UL-DPCH-Info-r7 ::=                 SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo-r6         OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            scramblingCodeType                  ScramblingCodeType,
            scramblingCode                      UL-ScramblingCode,
            dpdchPresence                       CHOICE {
                present                             SEQUENCE {
                    numberOfDPDCH                       NumberOfDPDCH               DEFAULT 1,
                    spreadingFactor                     SpreadingFactor,
                    tfci-Existence                      BOOLEAN,
                    -- numberOfFBI-Bits is conditional based on history
                    numberOfFBI-Bits                    NumberOfFBI-Bits            OPTIONAL,
                    puncturingLimit                     PuncturingLimit
                        },
                notPresent                          SEQUENCE {
                    tfci-Existence                      BOOLEAN,
                    -- numberOfFBI-Bits is conditional based on history
                    numberOfFBI-Bits                    NumberOfFBI-Bits            OPTIONAL
                }
            }
        },
        tdd                                 SEQUENCE {
            ul-TimingAdvance                    UL-TimingAdvanceControl-r7  OPTIONAL,
            ul-CCTrCHList                       UL-CCTrCHList-r7            OPTIONAL,
            ul-CCTrCHListToRemove               UL-CCTrCHListToRemove       OPTIONAL
        }
    }
}

UL-DPCH-InfoPostFDD ::=             SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfoPostFDD,
            scramblingCodeType                  ScramblingCodeType,
            reducedScramblingCodeNumber         ReducedScramblingCodeNumber,
            spreadingFactor                     SpreadingFactor

}

UL-DPCH-InfoPostTDD ::=             SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfoPostTDD,
    ul-TimingAdvance                    UL-TimingAdvanceControl                 OPTIONAL,
    ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes
}

UL-DPCH-InfoPostTDD-LCR-r4 ::=      SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfoPostTDD-LCR-r4,
    ul-TimingAdvance                    UL-TimingAdvanceControl-LCR-r4              OPTIONAL,
    ul-CCTrCH-TimeslotsCodes            UplinkTimeslotsCodes-LCR-r4
}

UL-DPCH-InfoPredef ::=              SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfoPredef,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            tfci-Existence                      BOOLEAN,
            puncturingLimit                     PuncturingLimit
        },
        tdd                                 SEQUENCE {
            commonTimeslotInfo                  CommonTimeslotInfo
        }
    }
}

UL-DPCH-PowerControlInfo ::=        CHOICE {
    fdd                                 SEQUENCE {
```

```
        dpcch-PowerOffset                   DPCCH-PowerOffset,
        pc-Preamble                         PC-Preamble,
        sRB-delay                           SRB-delay,
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
        powerControlAlgorithm               PowerControlAlgorithm
    },
    tdd                                 SEQUENCE {
        ul-TargetSIR                        UL-TargetSIR                OPTIONAL,
        ul-OL-PC-Signalling                 CHOICE {
            broadcast-UL-OL-PC-info             NULL,
            individuallySignalled               SEQUENCE {
                individualTS-InterferenceList       IndividualTS-InterferenceList,
                dpch-ConstantValue                  ConstantValueTdd,
                primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power
            }
        }                                                               OPTIONAL
    }
}

UL-DPCH-PowerControlInfo-r4 ::=     CHOICE {
    fdd                                 SEQUENCE {
        dpcch-PowerOffset                   DPCCH-PowerOffset,
        pc-Preamble                         PC-Preamble,
        sRB-delay                           SRB-delay,
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
        powerControlAlgorithm               PowerControlAlgorithm
    },
    tdd                                 SEQUENCE {
        -- The IE ul-TargetSIR corresponds to PRX-DPCHdes for 1.28Mcps TDD
        -- Actual value PRX-DPCHdes = (value of IE "ul-TargetSIR" - 120)
        ul-TargetSIR                        UL-TargetSIR                OPTIONAL,
        ul-OL-PC-Signalling                 CHOICE {
            broadcast-UL-OL-PC-info             NULL,
            individuallySignalled               SEQUENCE {
                tddOption                           CHOICE {
                    tdd384                              SEQUENCE {
                        individualTS-InterferenceList       IndividualTS-InterferenceList,
                        dpch-ConstantValue                  ConstantValue
                    },
                    tdd128                              SEQUENCE {
                        tpc-StepSize                        TPC-StepSizeTDD
                    }
                },
                primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power
            }
        }
    }
}

UL-DPCH-PowerControlInfo-r5 ::=     CHOICE {
    fdd                                 SEQUENCE {
        dpcch-PowerOffset                   DPCCH-PowerOffset,
        pc-Preamble                         PC-Preamble,
        sRB-delay                           SRB-delay,
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
        powerControlAlgorithm               PowerControlAlgorithm,
        deltaACK                            DeltaACK    OPTIONAL,
        deltaNACK                           DeltaNACK   OPTIONAL,
        ack-NACK-repetition-factor          ACK-NACK-repetitionFactor   OPTIONAL
    },
    tdd                                 SEQUENCE {
        -- The IE ul-TargetSIR corresponds to PRX-DPCHdes for 1.28Mcps TDD
        -- Actual value PRX-DPCHdes = (value of IE "ul-TargetSIR" - 120)
        ul-TargetSIR                        UL-TargetSIR                OPTIONAL,
        ul-OL-PC-Signalling                 CHOICE {
            broadcast-UL-OL-PC-info             NULL,
            individuallySignalled               SEQUENCE {
                tddOption                           CHOICE {
                    tdd384                              SEQUENCE {
                        individualTS-InterferenceList       IndividualTS-InterferenceList,
                        dpch-ConstantValue                  ConstantValue
                    },
                    tdd128                              SEQUENCE {
                        tpc-StepSize                        TPC-StepSizeTDD
                    }
                },
                primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power
            }
```

```
        }
    }
}

UL-DPCH-PowerControlInfo-r6 ::=     CHOICE {
    fdd                                 SEQUENCE {
        dpcch-PowerOffset                   DPCCH-PowerOffset,
        pc-Preamble                         PC-Preamble,
        sRB-delay                           SRB-delay,
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
        powerControlAlgorithm               PowerControlAlgorithm,
        deltaACK                            DeltaACK    OPTIONAL,
        deltaNACK                           DeltaNACK   OPTIONAL,
        ack-NACK-repetition-factor          ACK-NACK-repetitionFactor   OPTIONAL,
        harq-Preamble-Mode                  HARQ-Preamble-Mode
    },
    tdd                                 SEQUENCE {
        -- The IE ul-TargetSIR corresponds to PRX-DPCHdes for 1.28Mcps TDD
        -- Actual value PRX-DPCHdes = (value of IE "ul-TargetSIR" - 120)
        ul-TargetSIR                        UL-TargetSIR                OPTIONAL,
        ul-OL-PC-Signalling                 CHOICE {
            broadcast-UL-OL-PC-info             NULL,
            individuallySignalled               SEQUENCE {
                tddOption                           CHOICE {
                    tdd384                              SEQUENCE {
                        individualTS-InterferenceList       IndividualTS-InterferenceList,
                        dpch-ConstantValue                  ConstantValue
                    },
                    tdd128                              SEQUENCE {
                        beaconPLEst                         BEACON-PL-Est       OPTIONAL,
                        tpc-StepSize                        TPC-StepSizeTDD
                    }
                },
                primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power
            }
        }
    }
}

UL-DPCH-PowerControlInfo-r7 ::=     CHOICE {
    fdd                                 SEQUENCE {
        dpcch-PowerOffset                   DPCCH-PowerOffset,
        pc-Preamble                         PC-Preamble,
        sRB-delay                           SRB-delay,
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
        powerControlAlgorithm               PowerControlAlgorithm,
        deltaACK                            DeltaACK    OPTIONAL,
        deltaNACK                           DeltaNACK   OPTIONAL,
        ack-NACK-repetition-factor          ACK-NACK-repetitionFactor   OPTIONAL,
        harq-Preamble-Mode                  HARQ-Preamble-Mode
    },
    tdd                                 SEQUENCE {
        -- The IE ul-TargetSIR corresponds to PRX-DPCHdes for 1.28Mcps TDD
        -- Actual value PRX-DPCHdes = (value of IE "ul-TargetSIR" - 120)
        ul-TargetSIR                        UL-TargetSIR                OPTIONAL,
        ul-OL-PC-Signalling                 CHOICE {
            broadcast-UL-OL-PC-info             NULL,
            individuallySignalled               SEQUENCE {
                tddOption                           CHOICE {
                    tdd384                              SEQUENCE {
                        individualTS-InterferenceList       IndividualTS-InterferenceList,
                        dpch-ConstantValue                  ConstantValue
                    },
                    tdd768                              SEQUENCE {
                        individualTS-InterferenceList       IndividualTS-InterferenceList,
                        dpch-ConstantValue                  ConstantValue
                    },
                    tdd128                              SEQUENCE {
                        beaconPLEst                         BEACON-PL-Est       OPTIONAL,
                        tpc-StepSize                        TPC-StepSizeTDD
                    }
                },
                primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power
            }
        }
    }
}
```

```
UL-DPCH-PowerControlInfoPostFDD ::= SEQUENCE {
    -- DPCCH-PowerOffset2 has a smaller range to save bits
    dpcch-PowerOffset                   DPCCH-PowerOffset2,
    pc-Preamble                         PC-Preamble,
    sRB-delay                           SRB-delay
}

UL-DPCH-PowerControlInfoPostTDD ::= SEQUENCE {
    ul-TargetSIR                        UL-TargetSIR,
    ul-TimeslotInterference             TDD-UL-Interference
}

UL-DPCH-PowerControlInfoPostTDD-LCR-r4 ::=  SEQUENCE {
    -- The IE ul-TargetSIR corresponds to PRX-DPCHdes for 1.28Mcps TDD
    -- Actual value PRX-DPCHdes = (value of IE "ul-TargetSIR" - 120)
    ul-TargetSIR                        UL-TargetSIR
}

UL-DPCH-PowerControlInfoPredef ::=      CHOICE {
    fdd                                 SEQUENCE {
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
        powerControlAlgorithm               PowerControlAlgorithm
    },
    tdd                                 SEQUENCE {
        -- dpch-ConstantValue shall be ignored if in 1.28Mcps TDD mode.
        dpch-ConstantValue                  ConstantValueTdd
    }
}

UL-EDCH-Information-r6 ::=          SEQUENCE {
    mac-es-e-resetIndicator             ENUMERATED { true }                     OPTIONAL,
    e-DPCCH-Info                        E-DPCCH-Info                            OPTIONAL,
    e-DPDCH-Info                        E-DPDCH-Info                            OPTIONAL,
    schedulingTransmConfiguration       E-DPDCH-SchedulingTransmConfiguration   OPTIONAL
}

UL-EDCH-Information-r7 ::=          SEQUENCE {
    mac-es-e-resetIndicator             ENUMERATED { true }                     OPTIONAL,
    modeSpecific                        CHOICE {
        fdd                                 SEQUENCE {
            e-DPCCH-Info                        E-DPCCH-Info                            OPTIONAL,
            e-DPDCH-Info                        E-DPDCH-Info                            OPTIONAL,
            schedulingTransmConfiguration       E-DPDCH-SchedulingTransmConfiguration   OPTIONAL
        },
        tdd                                 CHOICE {
            tdd384-tdd768                       SEQUENCE {
                e-RUCCH-Info                        E-RUCCH-Info                    OPTIONAL,
                e-PUCH-Info                         E-PUCH-Info                     OPTIONAL
            },
            tdd128                              NULL
        }
    }
}

UL-Interference ::=                 INTEGER (-110..-70)

UL-ScramblingCode ::=               INTEGER (0..16777215)


UL-SynchronisationParameters-r4 ::= SEQUENCE {
    stepSize                            INTEGER (1..8),
    frequency                           INTEGER (1..8)
}

-- Actual value UL-TargetSIR = (IE value * 0.5) - 11
UL-TargetSIR ::=                    INTEGER (0..62)

UL-TimingAdvance ::=                INTEGER (0..63)

UL-TimingAdvanceControl ::=         CHOICE {
    disabled                            NULL,
    enabled                             SEQUENCE {
        ul-TimingAdvance                    UL-TimingAdvance                OPTIONAL,
        activationTime                      ActivationTime                  OPTIONAL
    }
}

UL-TimingAdvanceControl-r4 ::=      CHOICE {
```

```
    disabled                            NULL,
    enabled                             SEQUENCE {
        tddOption                           CHOICE {
            tdd384                              SEQUENCE {
                ul-TimingAdvance                    UL-TimingAdvance                OPTIONAL,
                activationTime                      ActivationTime                  OPTIONAL
            },
            tdd128                              SEQUENCE {
                ul-SynchronisationParameters        UL-SynchronisationParameters-r4 OPTIONAL,
                synchronisationParameters           SynchronisationParameters-r4    OPTIONAL
            }
        }
    }
}

UL-TimingAdvanceControl-r7 ::=      CHOICE {
    disabled                            NULL,
    enabled                             SEQUENCE {
        tddOption                           CHOICE {
            tdd384                              SEQUENCE {
                ul-TimingAdvance                    UL-TimingAdvance                OPTIONAL,
                ext-ul-TimingAdvance                EXT-UL-TimingAdvance            OPTIONAL,
                activationTime                      ActivationTime                  OPTIONAL
            },
            tdd768                              SEQUENCE {
                ext-ul-TimingAdvance                EXT-UL-TimingAdvance            OPTIONAL,
                activationTime                      ActivationTime                  OPTIONAL
            },
            tdd128                              SEQUENCE {
                ul-SynchronisationParameters        UL-SynchronisationParameters-r4 OPTIONAL,
                synchronisationParameters           SynchronisationParameters-r4    OPTIONAL
            }
        }
    }
}

UL-TimingAdvanceControl-LCR-r4 ::=  CHOICE {
    disabled                            NULL,
    enabled                             SEQUENCE {
        ul-SynchronisationParameters        UL-SynchronisationParameters-r4 OPTIONAL,
        synchronisationParameters           SynchronisationParameters-r4    OPTIONAL
    }
}

UL-TS-ChannelisationCode ::=        ENUMERATED {
                                        cc1-1, cc2-1, cc2-2,
                                        cc4-1, cc4-2, cc4-3, cc4-4,
                                        cc8-1, cc8-2, cc8-3, cc8-4,
                                        cc8-5, cc8-6, cc8-7, cc8-8,
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16 }

UL-TS-ChannelisationCodeList ::=    SEQUENCE (SIZE (1..2)) OF
                                        UL-TS-ChannelisationCode

UL-TS-ChannelisationCodeList-r7 ::=     SEQUENCE (SIZE (1..2)) OF
                                            SEQUENCE {
        ul-TS-Channelisation-Code               UL-TS-ChannelisationCode,
        plcch-info                              PLCCH-Info      OPTIONAL
}

UL-TS-ChannelisationCode-VHCR ::=       ENUMERATED {
                                        cc1-1, cc2-1, cc2-2,
                                        cc4-1, cc4-2, cc4-3, cc4-4,
                                        cc8-1, cc8-2, cc8-3, cc8-4,
                                        cc8-5, cc8-6, cc8-7, cc8-8,
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16,
                                        cc32-1, cc32-2, cc32-3, cc32-4,
                                        cc32-5, cc32-6, cc32-7, cc32-8,
                                        cc32-9, cc32-10, cc32-11, cc32-12,
                                        cc32-13, cc32-14, cc32-15, cc32-16,
                                        cc32-17, cc32-18, cc32-19, cc32-20,
                                        cc32-21, cc32-22, cc32-23, cc32-24,
```

```
                                    cc32-25, cc32-26, cc32-27, cc32-28,
                                    cc32-29, cc32-30, cc32-31, cc32-32 }

UL-TS-ChannelisationCodeList-VHCR ::=   SEQUENCE (SIZE (1..2)) OF
                                        UL-TS-ChannelisationCode-VHCR

UplinkAdditionalTimeslots ::=       SEQUENCE {
    parameters                          CHOICE {
        sameAsLast                          SEQUENCE {
            timeslotNumber                      TimeslotNumber
        },
        newParameters                       SEQUENCE {
            individualTimeslotInfo                      IndividualTimeslotInfo,
            ul-TS-ChannelisationCodeList                UL-TS-ChannelisationCodeList
        }
    }
}

UplinkAdditionalTimeslots-LCR-r4 ::=    SEQUENCE {
    parameters                          CHOICE {
        sameAsLast                          SEQUENCE {
            timeslotNumber                      TimeslotNumber
        },
        newParameters                       SEQUENCE {
            individualTimeslotInfo                      IndividualTimeslotInfo-LCR-r4,
            ul-TS-ChannelisationCodeList                UL-TS-ChannelisationCodeList
        }
    }
}

UplinkAdditionalTimeslots-LCR-r7 ::=    SEQUENCE {
    parameters                          CHOICE {
        sameAsLast                          SEQUENCE {
            timeslotNumber                      TimeslotNumber
            -- plcch-info assigned as previously defined slot
        },
        newParameters                       SEQUENCE {
            individualTimeslotInfo              IndividualTimeslotInfo-LCR-r4,
            ul-TS-ChannelisationCodeList        UL-TS-ChannelisationCodeList-r7
        }
    }
}

UplinkTimeslotsCodes ::=            SEQUENCE {
    dynamicSFusage                      BOOLEAN,
    firstIndividualTimeslotInfo         IndividualTimeslotInfo,
    ul-TS-ChannelisationCodeList        UL-TS-ChannelisationCodeList,
    moreTimeslots                       CHOICE {
        noMore                              NULL,
        additionalTimeslots                 CHOICE {
            consecutive                         SEQUENCE {
                numAdditionalTimeslots              INTEGER (1..maxTS-1)
            },
            timeslotList                        SEQUENCE (SIZE (1..maxTS-1)) OF
                                                    UplinkAdditionalTimeslots
        }
    }
}

UplinkTimeslotsCodes-VHCR ::=       SEQUENCE {
    dynamicSFusage                      BOOLEAN,
    firstIndividualTimeslotInfo         IndividualTimeslotInfo-VHCR,
    ul-TS-ChannelisationCodeList        UL-TS-ChannelisationCodeList-VHCR,
    moreTimeslots                       CHOICE {
        noMore                              NULL,
        additionalTimeslots                 CHOICE {
            consecutive                         SEQUENCE {
                numAdditionalTimeslots              INTEGER (1..maxTS-1)
            },
            timeslotList                        SEQUENCE (SIZE (1..maxTS-1)) OF
                                                    UplinkAdditionalTimeslots
        }
    }
}

UplinkTimeslotsCodes-LCR-r4 ::=     SEQUENCE {
    dynamicSFusage                      BOOLEAN,
    firstIndividualTimeslotInfo         IndividualTimeslotInfo-LCR-r4,
```

```
    ul-TS-ChannelisationCodeList        UL-TS-ChannelisationCodeList,
    moreTimeslots                       CHOICE {
        noMore                              NULL,
        additionalTimeslots                 CHOICE {
            consecutive                         SEQUENCE {
                numAdditionalTimeslots              INTEGER (1..maxTS-LCR-1)
            },
            timeslotList                        SEQUENCE (SIZE (1..maxTS-LCR-1)) OF
                                                    UplinkAdditionalTimeslots-LCR-r4
        }
    }
}

UplinkTimeslotsCodes-LCR-r7 ::=     SEQUENCE {
    dynamicSFusage                      BOOLEAN,
    firstIndividualTimeslotInfo         IndividualTimeslotInfo-LCR-r4,
    ul-TS-ChannelisationCodeList        UL-TS-ChannelisationCodeList-r7,
    moreTimeslots                       CHOICE {
        noMore                              NULL,
        additionalTimeslots                 CHOICE {
            consecutive                         SEQUENCE {
            -- the choice of 'consecutive' is not needed because there is only 1 option.
                numAdditionalTimeslots              INTEGER (1..maxTS-LCR-1)
            },
            timeslotList                        SEQUENCE (SIZE (1..maxTS-LCR-1)) OF
                                                    UplinkAdditionalTimeslots-LCR-r7
        }
    }
}

Wi-LCR ::=                                                          INTEGER(1..4)

-- **************************************************
--
--     MEASUREMENT INFORMATION ELEMENTS (10.3.7)
--
-- **************************************************

AcquisitionSatInfo ::=              SEQUENCE {
    satID                               SatID,
    -- Actual value dopplerOthOrder = IE value * 2.5
    doppler0thOrder                     INTEGER (-2048..2047),
    extraDopplerInfo                    ExtraDopplerInfo                    OPTIONAL,
    codePhase                           INTEGER (0..1022),
    integerCodePhase                    INTEGER (0..19),
    gps-BitNumber                       INTEGER (0..3),
    codePhaseSearchWindow               CodePhaseSearchWindow,
    azimuthAndElevation                 AzimuthAndElevation                 OPTIONAL
}

AcquisitionSatInfoList ::=          SEQUENCE (SIZE (1..maxSat)) OF
                                        AcquisitionSatInfo


AdditionalMeasurementID-List ::=    SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
                                        MeasurementIdentity

AlmanacSatInfo ::=                  SEQUENCE {
    dataID                              INTEGER (0..3),
    satID                               SatID,
    e                                   BIT STRING (SIZE (16)),
    t-oa                                BIT STRING (SIZE (8)),
    deltaI                              BIT STRING (SIZE (16)),
    omegaDot                            BIT STRING (SIZE (16)),
    satHealth                           BIT STRING (SIZE (8)),
    a-Sqrt                              BIT STRING (SIZE (24)),
    omega0                              BIT STRING (SIZE (24)),
    m0                                  BIT STRING (SIZE (24)),
    omega                               BIT STRING (SIZE (24)),
    af0                                 BIT STRING (SIZE (11)),
    af1                                 BIT STRING (SIZE (11))
}

AlmanacSatInfoList ::=              SEQUENCE (SIZE (1..maxSat)) OF
                                        AlmanacSatInfo

AverageRLC-BufferPayload ::=        ENUMERATED {
                                        pla0, pla4, pla8, pla16, pla32,
```

```
                                    pla64, pla128, pla256, pla512,
                                    pla1024, pla2k, pla4k, pla8k, pla16k,
                                    pla32k, pla64k, pla128k, pla256k,
                                    pla512k, pla1024k, spare12, spare11,
                                    spare10, spare9, spare8, spare7, spare6,
                                    spare5, spare4, spare3, spare2, spare1 }

AzimuthAndElevation ::=             SEQUENCE {
    -- Actual value azimuth = IE value * 11.25
    azimuth                         INTEGER (0..31),
    -- Actual value elevation = IE value * 11.25
    elevation                       INTEGER (0..7)
}

BadSatList ::=                      SEQUENCE (SIZE (1..maxSat)) OF
                                        INTEGER (0..63)

Frequency-Band ::=                  ENUMERATED {
                                        dcs1800BandUsed, pcs1900BandUsed }

BCCH-ARFCN ::=                      INTEGER (0..1023)

BLER-MeasurementResults ::=         SEQUENCE {
    transportChannelIdentity            TransportChannelIdentity,
    dl-TransportChannelBLER             DL-TransportChannelBLER             OPTIONAL
}

BLER-MeasurementResultsList ::=     SEQUENCE (SIZE (1..maxTrCH)) OF
                                        BLER-MeasurementResults

BLER-TransChIdList ::=              SEQUENCE (SIZE (1..maxTrCH)) OF
                                        TransportChannelIdentity

BSIC-VerificationRequired ::=       ENUMERATED {
                                        required, notRequired }

BSICReported ::=                    CHOICE {
    -- Value maxCellMeas is not allowed for verifiedBSIC
    verifiedBSIC                        INTEGER (0..maxCellMeas),
    nonVerifiedBSIC                     BCCH-ARFCN
}

BurstModeParameters ::=             SEQUENCE {
    burstStart                          INTEGER (0..15),
    burstLength                         INTEGER (10..25),
    burstFreq                           INTEGER (1..16)
}

CellDCH-ReportCriteria ::=          CHOICE {
    intraFreqReportingCriteria          IntraFreqReportingCriteria,
    periodicalReportingCriteria         PeriodicalReportingCriteria
}

CellDCH-ReportCriteria-LCR-r4 ::=   CHOICE {
    intraFreqReportingCriteria          IntraFreqReportingCriteria-LCR-r4,
    periodicalReportingCriteria         PeriodicalReportingCriteria
}

-- Actual value CellIndividualOffset = IE value * 0.5
CellIndividualOffset ::=            INTEGER (-20..20)


CellInfo ::=                        SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info           OPTIONAL,
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            readSFN-Indicator                   BOOLEAN,
            tx-DiversityIndicator               BOOLEAN
        },
        tdd                                 SEQUENCE {
            primaryCCPCH-Info                   PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power       OPTIONAL,
            timeslotInfoList                    TimeslotInfoList            OPTIONAL,
            readSFN-Indicator                   BOOLEAN
        }
```

```
    }
}

CellInfo-r4 ::=                     SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info           OPTIONAL,
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            readSFN-Indicator                   BOOLEAN,
            tx-DiversityIndicator               BOOLEAN
        },
        tdd                                 SEQUENCE {
            primaryCCPCH-Info                   PrimaryCCPCH-Info-r4,
            primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power       OPTIONAL,
            timeslotInfoList                    TimeslotInfoList-r4         OPTIONAL,
            readSFN-Indicator                   BOOLEAN

        }
    }
}

CellInfoSI-RSCP ::=                 SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info           OPTIONAL,
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            readSFN-Indicator                   BOOLEAN,
            tx-DiversityIndicator               BOOLEAN
        },
        tdd                                 SEQUENCE {
            primaryCCPCH-Info                   PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power       OPTIONAL,
            timeslotInfoList                    TimeslotInfoList            OPTIONAL,
            readSFN-Indicator                   BOOLEAN
        }
    },
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-RSCP        OPTIONAL
}

CellInfoSI-RSCP-LCR-r4 ::=          SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    primaryCCPCH-Info                   PrimaryCCPCH-Info-LCR-r4,
    primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power               OPTIONAL,
    timeslotInfoList                    TimeslotInfoList-LCR-r4             OPTIONAL,
    readSFN-Indicator                   BOOLEAN,
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-RSCP        OPTIONAL
}

CellInfoSI-ECN0 ::=                 SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info           OPTIONAL,
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            readSFN-Indicator                   BOOLEAN,
            tx-DiversityIndicator               BOOLEAN
        },
        tdd                                 SEQUENCE {
            primaryCCPCH-Info                   PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power       OPTIONAL,
            timeslotInfoList                    TimeslotInfoList            OPTIONAL,
            readSFN-Indicator                   BOOLEAN
        }
    },
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-ECN0    OPTIONAL
}

CellInfoSI-ECN0-LCR-r4 ::=          SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    primaryCCPCH-Info                   PrimaryCCPCH-Info-LCR-r4,
    primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power               OPTIONAL,
```

```
    timeslotInfoList                    TimeslotInfoList-LCR-r4             OPTIONAL,
    readSFN-Indicator                   BOOLEAN,
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-ECN0    OPTIONAL
}

CellInfoSI-HCS-RSCP ::=             SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info           OPTIONAL,
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            readSFN-Indicator                   BOOLEAN,
            tx-DiversityIndicator               BOOLEAN
        },
        tdd                                 SEQUENCE {
            primaryCCPCH-Info                   PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power       OPTIONAL,
            timeslotInfoList                    TimeslotInfoList            OPTIONAL,
            readSFN-Indicator                   BOOLEAN
        }
    },
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-HCS-RSCP    OPTIONAL
}

CellInfoSI-HCS-RSCP-LCR-r4 ::=      SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    primaryCCPCH-Info                   PrimaryCCPCH-Info-LCR-r4,
    primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power               OPTIONAL,
    timeslotInfoList                    TimeslotInfoList-LCR-r4             OPTIONAL,
    readSFN-Indicator                   BOOLEAN,
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-HCS-RSCP    OPTIONAL
}

CellInfoSI-HCS-ECN0 ::=             SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info           OPTIONAL,
            primaryCPICH-TX-Power               PrimaryCPICH-TX-Power       OPTIONAL,
            readSFN-Indicator                   BOOLEAN,
            tx-DiversityIndicator               BOOLEAN
        },
        tdd                                 SEQUENCE {
            primaryCCPCH-Info                   PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power       OPTIONAL,
            timeslotInfoList                    TimeslotInfoList            OPTIONAL,
            readSFN-Indicator                   BOOLEAN
        }
    },
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-HCS-ECN0    OPTIONAL
}

CellInfoSI-HCS-ECN0-LCR-r4 ::=      SEQUENCE {
    cellIndividualOffset                CellIndividualOffset                DEFAULT 0,
    referenceTimeDifferenceToCell       ReferenceTimeDifferenceToCell       OPTIONAL,
    primaryCCPCH-Info                   PrimaryCCPCH-Info-LCR-r4,
    primaryCCPCH-TX-Power               PrimaryCCPCH-TX-Power               OPTIONAL,
    timeslotInfoList                    TimeslotInfoList-LCR-r4             OPTIONAL,
    readSFN-Indicator                   BOOLEAN,
    cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12-HCS-ECN0    OPTIONAL
}

CellMeasuredResults ::=             SEQUENCE {
    cellIdentity                        CellIdentity                        OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy           SFN-SFN-ObsTimeDifference           OPTIONAL,
    cellSynchronisationInfo         CellSynchronisationInfo         OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            cpich-Ec-N0                         CPICH-Ec-N0                 OPTIONAL,
            cpich-RSCP                          CPICH-RSCP                  OPTIONAL,
            pathloss                            Pathloss                    OPTIONAL
        },
```

```
        tdd                                 SEQUENCE {
            cellParametersID                    CellParametersID,
            proposedTGSN                        TGSN                        OPTIONAL,
            primaryCCPCH-RSCP                   PrimaryCCPCH-RSCP           OPTIONAL,
            pathloss                            Pathloss                    OPTIONAL,
            timeslotISCP-List                   TimeslotISCP-List           OPTIONAL
        }
    }
}

CellMeasurementEventResults ::=     CHOICE {
    fdd                                 SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            PrimaryCPICH-Info,
    tdd                                 SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            PrimaryCCPCH-Info
}

CellMeasurementEventResults-LCR-r4 ::=  SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            PrimaryCCPCH-Info-LCR-r4

CellReportingQuantities ::=         SEQUENCE {
    -- dummy is not used in this version of the specification
    -- and if received it should be ignored.
    dummy                   SFN-SFN-OTD-Type,
    cellIdentity-reportingIndicator                     BOOLEAN,
    cellSynchronisationInfoReportingIndicator           BOOLEAN,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            cpich-Ec-N0-reportingIndicator                          BOOLEAN,
            cpich-RSCP-reportingIndicator                           BOOLEAN,
            pathloss-reportingIndicator                         BOOLEAN
        },
        tdd                                 SEQUENCE {
            timeslotISCP-reportingIndicator                     BOOLEAN,
            proposedTGSN-ReportingRequired                      BOOLEAN,
            primaryCCPCH-RSCP-reportingIndicator                    BOOLEAN,
            pathloss-reportingIndicator                         BOOLEAN
        }
    }
}

CellSelectReselectInfoSIB-11-12 ::= SEQUENCE {
    q-Offset1S-N                        Q-OffsetS-N                         DEFAULT 0,
    q-Offset2S-N                        Q-OffsetS-N                         OPTIONAL,
    maxAllowedUL-TX-Power               MaxAllowedUL-TX-Power               OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP        HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            q-QualMin                           Q-QualMin                   OPTIONAL,
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        tdd                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        gsm                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-RSCP ::=    SEQUENCE {
    q-OffsetS-N                     Q-OffsetS-N                     DEFAULT 0,
    maxAllowedUL-TX-Power               MaxAllowedUL-TX-Power               OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            q-QualMin                           Q-QualMin                   OPTIONAL,
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        tdd                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        gsm                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        }
    }
}
```

```
CellSelectReselectInfoSIB-11-12-ECN0 ::=    SEQUENCE {
    q-Offset1S-N                        Q-OffsetS-N                     DEFAULT 0,
    q-Offset2S-N                        Q-OffsetS-N                     DEFAULT 0,
    maxAllowedUL-TX-Power               MaxAllowedUL-TX-Power               OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            q-QualMin                           Q-QualMin                   OPTIONAL,
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        tdd                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        gsm                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-RSCP ::=    SEQUENCE {
    q-OffsetS-N                     Q-OffsetS-N                     DEFAULT 0,
    maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power               OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP        HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            q-QualMin                       Q-QualMin                   OPTIONAL,
            q-RxlevMin                      Q-RxlevMin                  OPTIONAL
        },
        tdd                             SEQUENCE {
            q-RxlevMin                      Q-RxlevMin                  OPTIONAL
        },
        gsm                             SEQUENCE {
            q-RxlevMin                      Q-RxlevMin                  OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-ECN0 ::=    SEQUENCE {
    q-Offset1S-N                        Q-OffsetS-N                     DEFAULT 0,
    q-Offset2S-N                        Q-OffsetS-N                     DEFAULT 0,
    maxAllowedUL-TX-Power               MaxAllowedUL-TX-Power               OPTIONAL,
    hcs-NeighbouringCellInformation-ECN0        HCS-NeighbouringCellInformation-ECN0
    OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            q-QualMin                           Q-QualMin                   OPTIONAL,
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        tdd                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        },
        gsm                                 SEQUENCE {
            q-RxlevMin                          Q-RxlevMin                  OPTIONAL
        }
    }
}

CellSelectReselectInfo-v590ext ::= SEQUENCE {
    deltaQrxlevmin                  DeltaQrxlevmin                  OPTIONAL,
    deltaQhcs                       DeltaRSCP                       OPTIONAL
}

CellSelectReselectInfoPCHFACH-v5b0ext ::= SEQUENCE {
    q-Hyst-l-S-PCH              Q-Hyst-S-Fine                       OPTIONAL,
    q-Hyst-l-S-FACH             Q-Hyst-S-Fine                       OPTIONAL,
    q-Hyst-2-S-PCH              Q-Hyst-S-Fine                       OPTIONAL,
    q-Hyst-2-S-FACH             Q-Hyst-S-Fine                       OPTIONAL,
    t-Reselection-S-PCH         T-Reselection-S                     OPTIONAL,
    t-Reselection-S-FACH        T-Reselection-S-Fine                OPTIONAL
}

CellSelectReselectInfoTreselectionScaling-v5c0ext ::= SEQUENCE {
    -- For speed detection, the same HCS parameters are utilised
    non-HCS-t-CR-Max                        T-CRMax                                 OPTIONAL,
    speedDependentScalingFactor             SpeedDependentScalingFactor             OPTIONAL,
    interFrequencyTreselectionScalingFactor     TreselectionScalingFactor           OPTIONAL,
    interRATTreselectionScalingFactor           TreselectionScalingFactor           OPTIONAL
}
```

```
CellsForInterFreqMeasList ::=       SEQUENCE (SIZE  (1..maxCellMeas)) OF
                                        InterFreqCellID
CellsForInterRATMeasList ::=            SEQUENCE (SIZE  (1..maxCellMeas)) OF
                                        InterRATCellID
CellsForIntraFreqMeasList ::=       SEQUENCE (SIZE  (1..maxCellMeas)) OF
                                        IntraFreqCellID

CellSynchronisationInfo ::=         SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            countC-SFN-Frame-difference         CountC-SFN-Frame-difference     OPTIONAL,
            tm                                  INTEGER(0..38399)
        },
        tdd                                 SEQUENCE {
            countC-SFN-Frame-difference         CountC-SFN-Frame-difference     OPTIONAL
        }
    }
}

CellToReport ::=                    SEQUENCE {
    bsicReported                        BSICReported
}

CellToReportList ::=                SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        CellToReport

CodePhaseSearchWindow ::=           ENUMERATED {
                                        w1023, w1, w2, w3, w4, w6, w8,
                                        w12, w16, w24, w32, w48, w64,
                                        w96, w128, w192 }

CountC-SFN-Frame-difference ::= SEQUENCE {
    -- Actual value countC-SFN-High = IE value * 256
    countC-SFN-High                 INTEGER(0..15),
    off                             INTEGER(0..255)
}

-- SPARE: CPICH-Ec-No, Max = 49
-- Values above Max are spare
CPICH-Ec-N0 ::=                     INTEGER (0..63)

-- SPARE: CPICH- RSCP, Max = 91
-- Values above Max are spare
CPICH-RSCP ::=                      INTEGER (0..127)


DeltaPRC ::=                        INTEGER (-127..127)

--Actual value DeltaQrxlevmin = IE value * 2
DeltaQrxlevmin ::= INTEGER (-2..-1)

DeltaRSCP ::= INTEGER (-5..-1)

DeltaRSCPPerCell ::= SEQUENCE {
    deltaRSCP                       DeltaRSCP   OPTIONAL
}

-- Actual value DeltaRRC = IE value * 0.032
DeltaRRC ::=                        INTEGER (-7..7)

DGPS-CorrectionSatInfo ::=          SEQUENCE {
    satID                               SatID,
    iode                                IODE,
    udre                                UDRE,
    prc                                 PRC,
    rrc                                 RRC,
-- dummy1 and dummy2 are not used in this version of the specification and should be ignored.
    dummy1                          DeltaPRC,
    dummy2                          DeltaRRC,
    -- dummy3 and dummy4 are not used in this version of the specification. They should not
    -- be sent and if received they should be ignored.
    dummy3                          DeltaPRC            OPTIONAL,
    dummy4                          DeltaRRC            OPTIONAL
}

DGPS-CorrectionSatInfoList ::=      SEQUENCE (SIZE (1..maxSat)) OF
                                        DGPS-CorrectionSatInfo
```

```
DiffCorrectionStatus ::=            ENUMERATED {
                                        udre-1-0, udre-0-75, udre-0-5, udre-0-3,
                                        udre-0-2, udre-0-1, noData, invalidData }

DL-TransportChannelBLER ::=         INTEGER (0..63)

DopplerUncertainty ::=              ENUMERATED {
                                        hz12-5, hz25, hz50, hz100, hz200,
                                        spare3, spare2, spare1 }

EllipsoidPoint ::=                  SEQUENCE {
    latitudeSign        ENUMERATED { north, south },
    latitude            INTEGER (0..8388607),
    longitude           INTEGER (-8388608..8388607)
}


EllipsoidPointAltitude ::=          SEQUENCE {
    latitudeSign        ENUMERATED { north, south },
    latitude            INTEGER (0..8388607),
    longitude           INTEGER (-8388608..8388607),
    altitudeDirection   ENUMERATED {height, depth},
    altitude            INTEGER (0..32767)
}


EllipsoidPointAltitudeEllipsoide ::=    SEQUENCE {
    latitudeSign            ENUMERATED { north, south },
    latitude                INTEGER (0..8388607),
    longitude               INTEGER (-8388608..8388607),
    altitudeDirection       ENUMERATED {height, depth},
    altitude                INTEGER (0..32767),
    uncertaintySemiMajor    INTEGER (0..127),
    uncertaintySemiMinor    INTEGER (0..127),
    -- Actual value orientationMajorAxis = IE value * 2
    orientationMajorAxis    INTEGER (0..89),
    uncertaintyAltitude     INTEGER (0..127),
    confidence              INTEGER (0..100)
}


EllipsoidPointUncertCircle ::=      SEQUENCE {
    latitudeSign            ENUMERATED { north, south },
    latitude                INTEGER (0..8388607),
    longitude               INTEGER (-8388608..8388607),
    uncertaintyCode         INTEGER (0..127)
}


EllipsoidPointUncertEllipse ::=     SEQUENCE {
    latitudeSign            ENUMERATED { north, south },
    latitude                INTEGER (0..8388607),
    longitude               INTEGER (-8388608..8388607),
    uncertaintySemiMajor    INTEGER (0..127),
    uncertaintySemiMinor    INTEGER (0..127),
    -- Actual value orientationMajorAxis = IE value * 2
    orientationMajorAxis    INTEGER (0..89),
    confidence              INTEGER (0..100)
}


EnvironmentCharacterisation ::=     ENUMERATED {
                                        possibleHeavyMultipathNLOS,
                                        lightMultipathLOS,
                                        notDefined,
                                        spare }

Event1a ::=                         SEQUENCE {
    triggeringCondition                 TriggeringCondition2,
    reportingRange                      ReportingRange,
    forbiddenAffectCellList             ForbiddenAffectCellList             OPTIONAL,
    w                                   W,
    reportDeactivationThreshold         ReportDeactivationThreshold,
    reportingAmount                     ReportingAmount,
    reportingInterval                   ReportingInterval
}
```

```
Event1a-r4 ::=                      SEQUENCE {
    triggeringCondition                 TriggeringCondition2,
    reportingRange                      ReportingRange,
    forbiddenAffectCellList             ForbiddenAffectCellList-r4          OPTIONAL,
    w                                   W,
    reportDeactivationThreshold         ReportDeactivationThreshold,
    reportingAmount                     ReportingAmount,
    reportingInterval                   ReportingInterval
}

Event1a-LCR-r4 ::=                  SEQUENCE {
    triggeringCondition                 TriggeringCondition2,
    reportingRange                      ReportingRange,
    forbiddenAffectCellList             ForbiddenAffectCellList-LCR-r4          OPTIONAL,
    w                                   W,
    reportDeactivationThreshold         ReportDeactivationThreshold,
    reportingAmount                     ReportingAmount,
    reportingInterval                   ReportingInterval
}

Event1b ::=                         SEQUENCE {
    triggeringCondition                 TriggeringCondition1,
    reportingRange                      ReportingRange,
    forbiddenAffectCellList             ForbiddenAffectCellList             OPTIONAL,
    w                                   W
}

Event1b-r4 ::=                      SEQUENCE {
    triggeringCondition                 TriggeringCondition1,
    reportingRange                      ReportingRange,
    forbiddenAffectCellList             ForbiddenAffectCellList-r4          OPTIONAL,
    w                                   W
}

Event1b-LCR-r4 ::=                  SEQUENCE {
    triggeringCondition                 TriggeringCondition1,
    reportingRange                      ReportingRange,
    forbiddenAffectCellList             ForbiddenAffectCellList-LCR-r4          OPTIONAL,
    w                                   W
}

Event1c ::=                         SEQUENCE {
    replacementActivationThreshold      ReplacementActivationThreshold,
    reportingAmount                     ReportingAmount,
    reportingInterval                   ReportingInterval
}

Event1d ::=                         SEQUENCE {
    triggeringCondition                 TriggeringCondition2    OPTIONAL,
    useCIO                              BOOLEAN                 OPTIONAL
}

Event1e ::=                     SEQUENCE {
    triggeringCondition             TriggeringCondition2,
    thresholdUsedFrequency          ThresholdUsedFrequency
}

Event1e-r6 ::=                  SEQUENCE {
    triggeringCondition             TriggeringCondition2,
    thresholdUsedFrequency          ThresholdUsedFrequency-r6
}

Event1f ::=                     SEQUENCE {
    triggeringCondition             TriggeringCondition1,
    thresholdUsedFrequency          ThresholdUsedFrequency
}

Event1f-r6 ::=                  SEQUENCE {
    triggeringCondition             TriggeringCondition1,
    thresholdUsedFrequency          ThresholdUsedFrequency-r6
}

Event1j-r6 ::=                  SEQUENCE {
    replacementActivationThreshold      ReplacementActivationThreshold,
    reportingAmount                     ReportingAmount,
    reportingInterval                   ReportingInterval
}
```

```
Event2a ::=                         SEQUENCE {
    -- dummy is not used in this version of the specification and should be ignored
    dummy                               Threshold,
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqParameterList            OPTIONAL
}

Event2a-r6 ::=                      SEQUENCE {
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqWList-r6                 OPTIONAL
}

Event2b ::=                         SEQUENCE {
    usedFreqThreshold                   Threshold,
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqParameterList            OPTIONAL
}

Event2b-r6 ::=                      SEQUENCE {
    usedFreqThreshold                   Threshold-r6,
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqParameterList-r6         OPTIONAL
}

Event2c ::=                         SEQUENCE {
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqParameterList            OPTIONAL
}

Event2c-r6 ::=                      SEQUENCE {
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqParameterList-r6         OPTIONAL
}

Event2d ::=                         SEQUENCE {
    usedFreqThreshold                   Threshold,
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

Event2d-r6 ::=                      SEQUENCE {
    usedFreqThreshold                   Threshold-r6,
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

Event2e ::=                         SEQUENCE {
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqParameterList            OPTIONAL
}

Event2e-r6 ::=                      SEQUENCE {
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL,
    nonUsedFreqParameterList            NonUsedFreqParameterList-r6         OPTIONAL
```

```
}

Event2f ::=                         SEQUENCE {
    usedFreqThreshold                   Threshold,
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus             OPTIONAL
}

Event2f-r6 ::=                      SEQUENCE {
    usedFreqThreshold                   Threshold-r6,
    usedFreqW                           W,
    hysteresis                          HysteresisInterFreq,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus             OPTIONAL
}

Event3a ::=                         SEQUENCE {
    thresholdOwnSystem                  Threshold,
    w                                   W,
    thresholdOtherSystem                Threshold,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus             OPTIONAL
}

Event3b ::=                         SEQUENCE {
    thresholdOtherSystem                Threshold,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus             OPTIONAL

}

Event3c ::=                         SEQUENCE {
    thresholdOtherSystem                Threshold,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus             OPTIONAL
}

Event3d ::=                         SEQUENCE {
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus             OPTIONAL
}

EventIDInterFreq ::=                ENUMERATED {
                                        e2a, e2b, e2c, e2d, e2e, e2f, spare2, spare1 }

EventIDInterRAT ::=                 ENUMERATED {
                                        e3a, e3b, e3c, e3d }

EventIDIntraFreq ::=                ENUMERATED {
                                        e1a, e1b, e1c, e1d, e1e,
                                        e1f, e1g, e1h, e1i, e1j,
                                        spare6, spare5, spare4, spare3, spare2,
                                        spare1 }

EventResults ::=                    CHOICE {
    intraFreqEventResults               IntraFreqEventResults,
    interFreqEventResults               InterFreqEventResults,
    interRATEventResults                InterRATEventResults,
    trafficVolumeEventResults           TrafficVolumeEventResults,
    qualityEventResults                 QualityEventResults,
    ue-InternalEventResults             UE-InternalEventResults,
    ue-positioning-MeasurementEventResults          UE-Positioning-MeasurementEventResults,
    spare                               NULL
}

ExtraDopplerInfo ::=                SEQUENCE {
    -- Actual value doppler1stOrder = IE value * 0.023
    doppler1stOrder                     INTEGER (-42..21),
    dopplerUncertainty                  DopplerUncertainty
}

FACH-MeasurementOccasionInfo ::=    SEQUENCE {
```

```
    fACH-meas-occasion-coeff            INTEGER (1..12)                     OPTIONAL,
    inter-freq-FDD-meas-ind             BOOLEAN,
    -- inter-freq-TDD-meas-ind is for 3.84Mcps TDD and 7.68 Mcps TDD. For 1.28Mcps TDD, the IE in
    -- FACH-MeasurementOccasionInfo-LCR-r4-ext is used.
    inter-freq-TDD-meas-ind             BOOLEAN,
    inter-RAT-meas-ind                  SEQUENCE (SIZE (1..maxOtherRAT)) OF
                                            RAT-Type                        OPTIONAL
}

FACH-MeasurementOccasionInfo-LCR-r4-ext ::= SEQUENCE {
    inter-freq-TDD128-meas-ind                  BOOLEAN
}

FilterCoefficient ::=               ENUMERATED {
                                        fc0, fc1, fc2, fc3, fc4, fc5,
                                        fc6, fc7, fc8, fc9, fc11, fc13,
                                        fc15, fc17, fc19, spare1 }

-- Actual value FineSFN-SFN = IE value * 0.0625
FineSFN-SFN ::=                     INTEGER (0..15)

ForbiddenAffectCell ::=             CHOICE {
    fdd                                 PrimaryCPICH-Info,
    tdd                                 PrimaryCCPCH-Info
}

ForbiddenAffectCell-r4 ::=          CHOICE {
    fdd                                 PrimaryCPICH-Info,
    tdd                                 PrimaryCCPCH-Info-r4
}

ForbiddenAffectCell-LCR-r4 ::=      SEQUENCE {
    tdd                                 PrimaryCCPCH-Info-LCR-r4
}

ForbiddenAffectCellList ::=         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        ForbiddenAffectCell

ForbiddenAffectCellList-r4 ::=          SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        ForbiddenAffectCell-r4

ForbiddenAffectCellList-LCR-r4 ::=  SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        ForbiddenAffectCell-LCR-r4

FreqQualityEstimateQuantity-FDD ::= ENUMERATED {
                                        cpich-Ec-N0,
                                        cpich-RSCP }

FreqQualityEstimateQuantity-TDD ::= ENUMERATED {
                                        primaryCCPCH-RSCP }

GPS-MeasurementParam ::=            SEQUENCE {
    satelliteID                         INTEGER (0..63),
    c-N0                                INTEGER (0..63),
    doppler                             INTEGER (-32768..32768),
    wholeGPS-Chips                      INTEGER (0..1022),
    fractionalGPS-Chips                 INTEGER (0..1023),
    multipathIndicator                  MultipathIndicator,
    pseudorangeRMS-Error                INTEGER (0..63)
}

GPS-MeasurementParamList ::=        SEQUENCE (SIZE (1..maxSat)) OF
                                        GPS-MeasurementParam

GSM-CarrierRSSI ::=                 BIT STRING (SIZE (6))


GSM-MeasuredResults ::=             SEQUENCE {
    gsm-CarrierRSSI                     GSM-CarrierRSSI                     OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                               INTEGER (46..173)                   OPTIONAL,
    bsicReported                        BSICReported,
    -- dummy2 is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy2                              ObservedTimeDifferenceToGSM         OPTIONAL
}
```

```
GSM-MeasuredResultsList ::=         SEQUENCE (SIZE (1..maxReportedGSMCells)) OF
                                        GSM-MeasuredResults

GPS-TOW-1msec ::=                   INTEGER (0..604799999)

GPS-TOW-Assist ::=                  SEQUENCE {
    satID                               SatID,
    tlm-Message                         BIT STRING (SIZE (14)),
    tlm-Reserved                        BIT STRING (SIZE (2)),
    alert                               BOOLEAN,
    antiSpoof                           BOOLEAN
}

GPS-TOW-AssistList ::=              SEQUENCE (SIZE (1..maxSat)) OF
                                        GPS-TOW-Assist

HCS-CellReselectInformation-RSCP ::=        SEQUENCE {
    -- TABULAR: The default value for penaltyTime is "notUsed"
    -- Temporary offset is nested inside PenaltyTime-RSCP
    penaltyTime                             PenaltyTime-RSCP
}

HCS-CellReselectInformation-ECN0 ::=        SEQUENCE {
    -- TABULAR: The default value for penaltyTime is "notUsed"
    -- Temporary offset is nested inside PenaltyTime-ECN0
    penaltyTime                         PenaltyTime-ECN0
}

HCS-NeighbouringCellInformation-RSCP ::= SEQUENCE {
    hcs-PRIO                            HCS-PRIO                            DEFAULT 0,
    q-HCS                               Q-HCS                               DEFAULT 0,
    hcs-CellReselectInformation         HCS-CellReselectInformation-RSCP
}

HCS-NeighbouringCellInformation-ECN0 ::= SEQUENCE {
    hcs-PRIO                            HCS-PRIO                            DEFAULT 0,
    q-HCS                               Q-HCS                               DEFAULT 0,
    hcs-CellReselectInformation         HCS-CellReselectInformation-ECN0
}

HCS-PRIO ::=                        INTEGER (0..7)

HCS-ServingCellInformation ::=      SEQUENCE {
    hcs-PRIO                            HCS-PRIO                            DEFAULT 0,
    q-HCS                               Q-HCS                               DEFAULT 0,
    t-CR-Max                            T-CRMax                             OPTIONAL
}

HorizontalVelocity ::=              SEQUENCE {
    bearing                             INTEGER (0..359),
    horizontalSpeed                     INTEGER (0..2047)
    }

HorizontalWithVerticalVelocity ::=  SEQUENCE {
    verticalSpeedDirection              ENUMERATED { upward, downward },
    bearing                             INTEGER (0..359),
    horizontalSpeed                     INTEGER (0..2047),
    verticalSpeed                       INTEGER (0..255)
}

HorizontalVelocityWithUncertainty ::=   SEQUENCE {
    bearing                             INTEGER (0..359),
    horizontalSpeed                     INTEGER (0..2047),
    horizontalSpeedUncertainty          INTEGER (0..255)
}

HorizontalWithVerticalVelocityAndUncertainty ::=    SEQUENCE {
    verticalSpeedDirection              ENUMERATED { upward, downward },
    bearing                             INTEGER (0..359),
    horizontalSpeed                     INTEGER (0..2047),
    verticalSpeed                       INTEGER (0..255),
    horizontalSpeedUncertainty          INTEGER (0..255)
}

-- Actual value Hysteresis = IE value * 0.5
Hysteresis ::=                      INTEGER (0..15)

-- Actual value HysteresisInterFreq = IE value * 0.5
```

```
HysteresisInterFreq ::=             INTEGER (0..29)

InterFreqCell ::=                   SEQUENCE {
    frequencyInfo                       FrequencyInfo,
    nonFreqRelatedEventResults          CellMeasurementEventResults
}

InterFreqCell-LCR-r4 ::=            SEQUENCE {
    frequencyInfo                       FrequencyInfo,
    nonFreqRelatedEventResults          CellMeasurementEventResults-LCR-r4
}

InterFreqCellID ::=                 INTEGER (0..maxCellMeas-1)

InterFreqCellInfoList ::=           SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellList                OPTIONAL,
    cellsForInterFreqMeasList           CellsForInterFreqMeasList           OPTIONAL
}

InterFreqCellInfoList-r4 ::=        SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellList-r4             OPTIONAL,
    cellsForInterFreqMeasList           CellsForInterFreqMeasList           OPTIONAL
}

InterFreqCellInfoSI-List-RSCP ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-RSCP        OPTIONAL
}

InterFreqCellInfoSI-List-ECN0 ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-ECN0        OPTIONAL
}

InterFreqCellInfoSI-List-HCS-RSCP ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-HCS-RSCP    OPTIONAL
}
InterFreqCellInfoSI-List-HCS-ECN0 ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-HCS-ECN0    OPTIONAL
}

InterFreqCellInfoSI-List-RSCP-LCR ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-RSCP-LCR-r4     OPTIONAL
}

InterFreqCellInfoSI-List-ECN0-LCR ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-ECN0-LCR-r4     OPTIONAL
}

InterFreqCellInfoSI-List-HCS-RSCP-LCR ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-HCS-RSCP-LCR-r4 OPTIONAL
}
InterFreqCellInfoSI-List-HCS-ECN0-LCR ::=       SEQUENCE {
    removedInterFreqCellList            RemovedInterFreqCellList            OPTIONAL,
    newInterFreqCellList                NewInterFreqCellSI-List-HCS-ECN0-LCR-r4 OPTIONAL
}

InterFreqCellList ::=               SEQUENCE (SIZE (1..maxFreq)) OF
                                        InterFreqCell

InterFreqCellList-LCR-r4-ext ::=    SEQUENCE (SIZE (1..maxFreq)) OF
                                        InterFreqCell-LCR-r4

InterFreqCellMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        CellMeasuredResults

InterFreqEvent ::=                  CHOICE {
    event2a                             Event2a,
    event2b                             Event2b,
    event2c                             Event2c,
    event2d                             Event2d,
```

```
    event2e                             Event2e,
    event2f                             Event2f
}

InterFreqEvent-r6 ::=               CHOICE {
    event2a                             Event2a-r6,
    event2b                             Event2b-r6,
    event2c                             Event2c-r6,
    event2d                             Event2d-r6,
    event2e                             Event2e-r6,
    event2f                             Event2f-r6
}

InterFreqEventList ::=              SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        InterFreqEvent

InterFreqEventList-r6 ::=           SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        InterFreqEvent-r6

--Following IE shall be used regardless of CPICH RSCP(FDD) or Primary CCPCH RSCP(TDD)
--The order of the list corresponds to the order of the cells in InterFrequencyMeasuredResultsList
--The IE is only used for measured results and not for additional measured results.
InterFrequencyMeasuredResultsList-v590ext ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            DeltaRSCPPerCell

Inter-FreqEventCriteria-v590ext ::= SEQUENCE {
    threholdUsedFrequency-delta             DeltaRSCP,
    threholdNonUsedFrequency-deltaList      ThreholdNonUsedFrequency-deltaList      OPTIONAL
}

--The order of the list corresponds to the order of the events in Inter-FreqEventList
Inter-FreqEventCriteriaList-v590ext ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                            Inter-FreqEventCriteria-v590ext

--The order of the list corresponds to the order of relevant events in Intra-FreqEventCriteriaList
--i.e. the first element of the list corresponds to the first occurance of event 1e, 1f, 1h, 1i,
--the second element of the list corresponds to the second occurance of event 1e, 1f, 1h, 1i
Intra-FreqEventCriteriaList-v590ext ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                            DeltaRSCP

--Following IE shall be used regardless of CPICH RSCP(FDD) or Primary CCPCH RSCP(TDD)
--The order of the list corresponds to the order of the cells in IntraFrequencyMeasuredResultsList
--The IE is only used for measured results and not for additional measured results.
IntraFrequencyMeasuredResultsList-v590ext ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            DeltaRSCPPerCell

IntraFreqReportingCriteria-1b-r5 ::= SEQUENCE {
    periodicReportingInfo-1b            PeriodicReportingInfo-1b
}

PeriodicReportingInfo-1b ::= SEQUENCE {
    reportingAmount                     ReportingAmount,
    reportingInterval                   ReportingInterval
}

InterFreqEventResults ::=           SEQUENCE {
    eventID                             EventIDInterFreq,
    interFreqCellList                   InterFreqCellList                   OPTIONAL
}

InterFreqEventResults-LCR-r4-ext ::=    SEQUENCE {
    eventID                             EventIDInterFreq,
    interFreqCellList                   InterFreqCellList-LCR-r4-ext        OPTIONAL
}

InterFreqMeasQuantity ::=           SEQUENCE {
    reportingCriteria                   CHOICE {
        intraFreqReportingCriteria          SEQUENCE {
            intraFreqMeasQuantity               IntraFreqMeasQuantity
        },
        interFreqReportingCriteria          SEQUENCE {
            filterCoefficient                   FilterCoefficient           DEFAULT fc0,
            modeSpecificInfo                    CHOICE {
                fdd                                 SEQUENCE {
                    freqQualityEstimateQuantity-FDD     FreqQualityEstimateQuantity-FDD
                },
                tdd                                 SEQUENCE {
                    freqQualityEstimateQuantity-TDD     FreqQualityEstimateQuantity-TDD
```

```
                }
            }
        }
    }
}

InterFreqMeasuredResults ::=        SEQUENCE {
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    utra-CarrierRSSI                    UTRA-CarrierRSSI                    OPTIONAL,
    interFreqCellMeasuredResultsList    InterFreqCellMeasuredResultsList    OPTIONAL
}

InterFreqMeasuredResultsList ::=    SEQUENCE (SIZE (1..maxFreq)) OF
                                        InterFreqMeasuredResults


InterFreqMeasurementSysInfo-RSCP ::=    SEQUENCE {
    interFreqCellInfoSI-List                InterFreqCellInfoSI-List-RSCP       OPTIONAL
}

InterFreqMeasurementSysInfo-ECN0 ::=        SEQUENCE {
    interFreqCellInfoSI-List            InterFreqCellInfoSI-List-ECN0       OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP ::=        SEQUENCE {
    interFreqCellInfoSI-List            InterFreqCellInfoSI-List-HCS-RSCP   OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECN0 ::=        SEQUENCE {
    interFreqCellInfoSI-List            InterFreqCellInfoSI-List-HCS-ECN0   OPTIONAL
}

InterFreqMeasurementSysInfo-RSCP-LCR-r4 ::= SEQUENCE {
    interFreqCellInfoSI-List                InterFreqCellInfoSI-List-RSCP-LCR       OPTIONAL
}

InterFreqMeasurementSysInfo-ECN0-LCR-r4 ::=     SEQUENCE {
    interFreqCellInfoSI-List            InterFreqCellInfoSI-List-ECN0-LCR       OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP-LCR-r4 ::=     SEQUENCE {
    interFreqCellInfoSI-List            InterFreqCellInfoSI-List-HCS-RSCP-LCR   OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECN0-LCR-r4 ::=     SEQUENCE {
    interFreqCellInfoSI-List            InterFreqCellInfoSI-List-HCS-ECN0-LCR   OPTIONAL
}

InterFreqRACHRepCellsList ::=           SEQUENCE (SIZE (1..maxFreq)) OF
InterFreqCellID

Dummy-InterFreqRACHReportingInfo ::= SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            interFreqRepQuantityRACH-FDD        InterFreqRepQuantityRACH-FDD
        },
        tdd                                 SEQUENCE {
            interFreqRepQuantityRACH-TDDList    InterFreqRepQuantityRACH-TDDList
        },
    interFreqRACHReportingThreshold     Threshold,
    maxReportedCellsOnRACHinterFreq     MaxReportedCellsOnRACHinterFreq
    }
}

InterFreqRACHReportingInfo ::= SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            interFreqRepQuantityRACH-FDD        InterFreqRepQuantityRACH-FDD
        },
        tdd                                 SEQUENCE {
            interFreqRepQuantityRACH-TDDList    InterFreqRepQuantityRACH-TDDList
        }
    },
    interFreqRACHReportingThreshold     Threshold,
    maxReportedCellsOnRACHinterFreq     MaxReportedCellsOnRACHinterFreq
}

InterFreqReportCriteria ::=         CHOICE {
```

```
    intraFreqReportingCriteria          IntraFreqReportingCriteria,
    interFreqReportingCriteria          InterFreqReportingCriteria,
    periodicalReportingCriteria         PeriodicalWithReportingCellStatus,
    noReporting                         ReportingCellStatusOpt
}

InterFreqReportCriteria-r4 ::=      CHOICE {
    intraFreqReportingCriteria          IntraFreqReportingCriteria-r4,
    interFreqReportingCriteria          InterFreqReportingCriteria,
    periodicalReportingCriteria         PeriodicalWithReportingCellStatus,
    noReporting                         ReportingCellStatusOpt
}

InterFreqReportCriteria-r6 ::=      CHOICE {
    intraFreqReportingCriteria          IntraFreqReportingCriteria-r6,
    interFreqReportingCriteria          InterFreqReportingCriteria-r6,
    periodicalReportingCriteria         PeriodicalWithReportingCellStatus,
    noReporting                         ReportingCellStatusOpt
}

InterFreqReportingCriteria ::=      SEQUENCE {
    interFreqEventList                  InterFreqEventList                  OPTIONAL
}

InterFreqReportingCriteria-r6 ::=   SEQUENCE {
    interFreqEventList                  InterFreqEventList-r6               OPTIONAL
}

InterFreqReportingQuantity ::=      SEQUENCE {
    utra-Carrier-RSSI                   BOOLEAN,
    frequencyQualityEstimate            BOOLEAN,
    nonFreqRelatedQuantities            CellReportingQuantities
}

InterFreqRepQuantityRACH-FDD ::=    ENUMERATED {
                                        cpich-EcN0, cpich-RSCP }

InterFreqRepQuantityRACH-TDD ::=    ENUMERATED {
                                        timeslotISCP,
                                        primaryCCPCH-RSCP }

InterFreqRepQuantityRACH-TDDList ::= SEQUENCE (SIZE (1..2)) OF
                                        InterFreqRepQuantityRACH-TDD

InterFrequencyMeasurement ::=       SEQUENCE {
    interFreqCellInfoList               InterFreqCellInfoList,
    interFreqMeasQuantity               InterFreqMeasQuantity               OPTIONAL,
    interFreqReportingQuantity          InterFreqReportingQuantity          OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    interFreqSetUpdate                  UE-AutonomousUpdateMode             OPTIONAL,
    reportCriteria                      InterFreqReportCriteria
}

InterFrequencyMeasurement-r4 ::=    SEQUENCE {
    interFreqCellInfoList               InterFreqCellInfoList-r4,
    interFreqMeasQuantity               InterFreqMeasQuantity               OPTIONAL,
    interFreqReportingQuantity          InterFreqReportingQuantity          OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    interFreqSetUpdate                  UE-AutonomousUpdateMode             OPTIONAL,
    reportCriteria                      InterFreqReportCriteria-r4
}

InterFrequencyMeasurement-r6 ::=    SEQUENCE {
    interFreqCellInfoList               InterFreqCellInfoList-r4,
    interFreqMeasQuantity               InterFreqMeasQuantity               OPTIONAL,
    interFreqReportingQuantity          InterFreqReportingQuantity          OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    interFreqSetUpdate                  UE-AutonomousUpdateMode             OPTIONAL,
    reportCriteria                      InterFreqReportCriteria-r6
}

InterRAT-TargetCellDescription ::=  SEQUENCE {
    technologySpecificInfo              CHOICE {
        gsm                                 SEQUENCE {
            bsic                                BSIC,
            frequency-band                      Frequency-Band,
            bcch-ARFCN                          BCCH-ARFCN,
            ncMode                              NC-Mode             OPTIONAL
```

```
        },
        is-2000                         NULL,
        spare2                          NULL,
        spare1                          NULL
    }
}

InterRATCellID ::=              INTEGER (0..maxCellMeas-1)

InterRATCellInfoIndication ::=      INTEGER (0..3)

InterRATCellInfoList ::=            SEQUENCE {
    removedInterRATCellList         RemovedInterRATCellList,
    -- NOTE: Future revisions of dedicated messages including IE newInterRATCellList
    -- should use a corrected version of this IE
    newInterRATCellList             NewInterRATCellList,
    cellsForInterRATMeasList            CellsForInterRATMeasList            OPTIONAL
}

InterRATCellInfoList-B ::=          SEQUENCE {
    removedInterRATCellList         RemovedInterRATCellList,
    -- NOTE: IE newInterRATCellList should be optional.  However, system information
    -- does not support message versions.  Hence, this can not be corrected
    newInterRATCellList             NewInterRATCellList-B
}

InterRATCellInfoList-r4 ::=         SEQUENCE {
    removedInterRATCellList             RemovedInterRATCellList,
    newInterRATCellList                 NewInterRATCellList                 OPTIONAL,
    cellsForInterRATMeasList            CellsForInterRATMeasList            OPTIONAL
}

InterRATCellInfoList-r6 ::=         SEQUENCE {
    removedInterRATCellList             RemovedInterRATCellList,
    newInterRATCellList                 NewInterRATCellList                 OPTIONAL,
    cellsForInterRATMeasList            CellsForInterRATMeasList            OPTIONAL,
    interRATCellInfoIndication-r6       InterRATCellInfoIndication          OPTIONAL
}

InterRATCellIndividualOffset ::=            INTEGER (-50..50)

InterRATEvent ::=               CHOICE {
    event3a                         Event3a,
    event3b                         Event3b,
    event3c                         Event3c,
    event3d                         Event3d
}

InterRATEventList ::=           SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                    InterRATEvent

InterRATEventResults ::=            SEQUENCE {
    eventID                         EventIDInterRAT,
    cellToReportList                CellToReportList
}

InterRATInfo ::=                    ENUMERATED {
                                    gsm }

InterRATInfo-r6 ::=                 SEQUENCE {
    rat                             InterRATInfo,
    gsm-TargetCellInfoList          GSM-TargetCellInfoList          OPTIONAL
}

InterRATMeasQuantity ::=                SEQUENCE {
    measQuantityUTRAN-QualityEstimate       IntraFreqMeasQuantity           OPTIONAL,
    ratSpecificInfo                 CHOICE {
        gsm                             SEQUENCE {
            measurementQuantity             MeasurementQuantityGSM,
            filterCoefficient               FilterCoefficient       DEFAULT fc0,
            bsic-VerificationRequired       BSIC-VerificationRequired
        },
        is-2000                         SEQUENCE {
            tadd-EcIo                       INTEGER (0..63),
            tcomp-EcIo                      INTEGER (0..15),
            softSlope                       INTEGER (0..63)         OPTIONAL,
            addIntercept                    INTEGER (0..63)         OPTIONAL
        }
```

```
    }
}

InterRATMeasuredResults ::=     CHOICE {
    gsm                             GSM-MeasuredResultsList,
    spare                           NULL
}

InterRATMeasuredResultsList ::= SEQUENCE (SIZE (1..maxOtherRAT-16)) OF
                                InterRATMeasuredResults

InterRATMeasurement ::=         SEQUENCE {
    interRATCellInfoList            InterRATCellInfoList            OPTIONAL,
    interRATMeasQuantity            InterRATMeasQuantity            OPTIONAL,
    interRATReportingQuantity       InterRATReportingQuantity   OPTIONAL,
    reportCriteria                  InterRATReportCriteria
}

InterRATMeasurement-r4 ::=          SEQUENCE {
    interRATCellInfoList            InterRATCellInfoList-r4         OPTIONAL,
    interRATMeasQuantity            InterRATMeasQuantity            OPTIONAL,
    interRATReportingQuantity       InterRATReportingQuantity   OPTIONAL,
    reportCriteria                  InterRATReportCriteria
}

InterRATMeasurement-r6 ::=          SEQUENCE {
    interRATCellInfoList            InterRATCellInfoList-r6         OPTIONAL,
    interRATMeasQuantity            InterRATMeasQuantity            OPTIONAL,
    interRATReportingQuantity       InterRATReportingQuantity   OPTIONAL,
    reportCriteria                  InterRATReportCriteria
}

InterRATMeasurementSysInfo ::=  SEQUENCE {
    interRATCellInfoList            InterRATCellInfoList            OPTIONAL
}

InterRATMeasurementSysInfo-B ::=    SEQUENCE {
    interRATCellInfoList            InterRATCellInfoList-B      OPTIONAL
}

InterRATReportCriteria ::=      CHOICE {
    interRATReportingCriteria       InterRATReportingCriteria,
    periodicalReportingCriteria     PeriodicalWithReportingCellStatus,
    noReporting                     ReportingCellStatusOpt
}

InterRATReportingCriteria ::=   SEQUENCE {
    interRATEventList           InterRATEventList           OPTIONAL
}

InterRATReportingQuantity ::=   SEQUENCE {
    utran-EstimatedQuality          BOOLEAN,
    ratSpecificInfo             CHOICE {
        gsm                             SEQUENCE {
            -- dummy and dummy2 are not used in this version of the specification
            -- and when received they should be ignored.
            dummy                           BOOLEAN,
            dummy2                          BOOLEAN,
            gsm-Carrier-RSSI                BOOLEAN
        }
    }
}

IntraFreqCellID ::=             INTEGER (0..maxCellMeas-1)

IntraFreqCellInfoList ::=       SEQUENCE {
    removedIntraFreqCellList        RemovedIntraFreqCellList        OPTIONAL,
    newIntraFreqCellList            NewIntraFreqCellList            OPTIONAL,
    cellsForIntraFreqMeasList       CellsForIntraFreqMeasList       OPTIONAL
}

IntraFreqCellInfoList-r4 ::=    SEQUENCE {
    removedIntraFreqCellList        RemovedIntraFreqCellList        OPTIONAL,
    newIntraFreqCellList            NewIntraFreqCellList-r4         OPTIONAL,
    cellsForIntraFreqMeasList       CellsForIntraFreqMeasList       OPTIONAL
}

IntraFreqCellInfoSI-List-RSCP ::=   SEQUENCE {
```

```
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-RSCP
}

IntraFreqCellInfoSI-List-ECN0 ::=       SEQUENCE {
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-ECN0
}

IntraFreqCellInfoSI-List-HCS-RSCP ::=       SEQUENCE {
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-HCS-RSCP
}

IntraFreqCellInfoSI-List-HCS-ECN0 ::=       SEQUENCE {
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-HCS-ECN0
}

IntraFreqCellInfoSI-List-RSCP-LCR-r4 ::=    SEQUENCE {
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-RSCP-LCR-r4
}

IntraFreqCellInfoSI-List-ECN0-LCR-r4 ::=        SEQUENCE {
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-ECN0-LCR-r4
}

IntraFreqCellInfoSI-List-HCS-RSCP-LCR-r4 ::=        SEQUENCE {
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-HCS-RSCP-LCR-r4
}

IntraFreqCellInfoSI-List-HCS-ECN0-LCR-r4 ::=        SEQUENCE {
    removedIntraFreqCellList            RemovedIntraFreqCellList            OPTIONAL,
    newIntraFreqCellList                NewIntraFreqCellSI-List-HCS-ECN0-LCR-r4
}

IntraFreqEvent ::=                  CHOICE {
    e1a                                 Event1a,
    e1b                                 Event1b,
    e1c                                 Event1c,
    e1d                                 NULL,
    e1e                                 Event1e,
    e1f                                 Event1f,
    e1g                                 NULL,
    e1h                                 ThresholdUsedFrequency,
    e1i                                 ThresholdUsedFrequency
}

IntraFreqEvent-r4 ::=               CHOICE {
    e1a                                 Event1a-r4,
    e1b                                 Event1b-r4,
    e1c                                 Event1c,
    e1d                                 NULL,
    e1e                                 Event1e,
    e1f                                 Event1f,
    e1g                                 NULL,
    e1h                                 ThresholdUsedFrequency,
    e1i                                 ThresholdUsedFrequency
}

IntraFreqEvent-LCR-r4 ::=           CHOICE {
    e1a                                 Event1a-LCR-r4,
    e1b                                 Event1b-LCR-r4,
    e1c                                 Event1c,
    e1d                                 NULL,
    e1e                                 Event1e,
    e1f                                 Event1f,
    e1g                                 NULL,
    e1h                                 ThresholdUsedFrequency,
    e1i                                 ThresholdUsedFrequency
}

IntraFreqEvent-r6 ::=               CHOICE {
    e1a                                 Event1a-r4,
    e1b                                 Event1b-r4,
```

```
    e1c                                 Event1c,
    e1d                                 Event1d,
    e1e                                 Event1e-r6,
    e1f                                 Event1f-r6,
    e1g                                 NULL,
    e1h                                 ThresholdUsedFrequency-r6,
    e1i                                 ThresholdUsedFrequency-r6,
    e1j                                 Event1j-r6
}

IntraFreqEvent-1d-r5 ::=        SEQUENCE {
    triggeringCondition                 TriggeringCondition2    OPTIONAL,
    useCIO                              BOOLEAN                 OPTIONAL
}

IntraFreqEventCriteria ::=          SEQUENCE {
    event                               IntraFreqEvent,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

IntraFreqEventCriteria-r4 ::=       SEQUENCE {
    event                               IntraFreqEvent-r4,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

IntraFreqEventCriteria-LCR-r4 ::=   SEQUENCE {
    event                               IntraFreqEvent-LCR-r4,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

IntraFreqEventCriteria-r6 ::=   SEQUENCE {
    event                               IntraFreqEvent-r6,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

IntraFreqEventCriteriaList ::=      SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        IntraFreqEventCriteria

IntraFreqEventCriteriaList-r4 ::=   SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        IntraFreqEventCriteria-r4

IntraFreqEventCriteriaList-LCR-r4 ::=   SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        IntraFreqEventCriteria-LCR-r4

IntraFreqEventCriteriaList-r6 ::=       SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        IntraFreqEventCriteria-r6

IntraFreqEventResults ::=           SEQUENCE {
    eventID                             EventIDIntraFreq,
    cellMeasurementEventResults         CellMeasurementEventResults
}

IntraFreqMeasQuantity ::=           SEQUENCE {
    filterCoefficient                   FilterCoefficient                   DEFAULT fc0,
    modeSpecificInfo                    CHOICE {
        fdd                             SEQUENCE {
            intraFreqMeasQuantity-FDD       IntraFreqMeasQuantity-FDD
        },
        tdd                             SEQUENCE {
            intraFreqMeasQuantity-TDDList   IntraFreqMeasQuantity-TDDList
        }
    }
}

-- If IntraFreqMeasQuantity-FDD is used in InterRATMeasQuantity, then only
-- cpich-Ec-N0 and cpich-RSCP are allowed.
-- dummy is not used in this version of the specification, it should
-- not be sent and if received the UE behaviour is not specified.
IntraFreqMeasQuantity-FDD ::=       ENUMERATED {
                                        cpich-Ec-N0,
```

```
                                    cpich-RSCP,
                                    pathloss,
                                    dummy }

-- dummy is not used in this version of the specification, it should
-- not be sent and if received the UE behaviour is not specified.
IntraFreqMeasQuantity-TDD ::=       ENUMERATED {
                                    primaryCCPCH-RSCP,
                                    pathloss,
                                    timeslotISCP,
                                    dummy }

IntraFreqMeasQuantity-TDDList ::=   SEQUENCE (SIZE (1..4)) OF
                                    IntraFreqMeasQuantity-TDD

IntraFreqMeasuredResultsList ::=    SEQUENCE (SIZE (1..maxCellMeas)) OF
                                    CellMeasuredResults

IntraFreqMeasurementSysInfo-RSCP ::=    SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-RSCP       OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
    reportingInfoForCellDCH             ReportingInfoForCellDCH             OPTIONAL
}

IntraFreqMeasurementSysInfo-ECN0 ::=        SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-ECN0       OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
    reportingInfoForCellDCH             ReportingInfoForCellDCH             OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP ::=    SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-HCS-RSCP   OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
    reportingInfoForCellDCH             ReportingInfoForCellDCH             OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECN0 ::=    SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-HCS-ECN0   OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
    reportingInfoForCellDCH             ReportingInfoForCellDCH             OPTIONAL
}

IntraFreqMeasurementSysInfo-RSCP-LCR-r4 ::= SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-RSCP-LCR-r4    OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
    reportingInfoForCellDCH             ReportingInfoForCellDCH-LCR-r4      OPTIONAL
}

IntraFreqMeasurementSysInfo-ECN0-LCR-r4 ::=     SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-ECN0-LCR-r4    OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
    reportingInfoForCellDCH             ReportingInfoForCellDCH-LCR-r4      OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP-LCR-r4 ::= SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-HCS-RSCP-LCR-r4    OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
```

```
    reportingInfoForCellDCH             ReportingInfoForCellDCH-LCR-r4      OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECN0-LCR-r4 ::= SEQUENCE {
    intraFreqMeasurementID              MeasurementIdentity         DEFAULT 1,
    intraFreqCellInfoSI-List            IntraFreqCellInfoSI-List-HCS-ECN0-LCR-r4    OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantityForRACH   IntraFreqReportingQuantityForRACH   OPTIONAL,
    maxReportedCellsOnRACH              MaxReportedCellsOnRACH              OPTIONAL,
    reportingInfoForCellDCH             ReportingInfoForCellDCH-LCR-r4      OPTIONAL
}

IntraFreqReportCriteria ::=         CHOICE {
    intraFreqReportingCriteria          IntraFreqReportingCriteria,
    periodicalReportingCriteria         PeriodicalWithReportingCellStatus,
    noReporting                         ReportingCellStatusOpt
}

IntraFreqReportCriteria-r4 ::=      CHOICE {
    intraFreqReportingCriteria          IntraFreqReportingCriteria-r4,
    periodicalReportingCriteria         PeriodicalWithReportingCellStatus,
    noReporting                         ReportingCellStatusOpt
}

IntraFreqReportCriteria-r6 ::=      CHOICE {
    intraFreqReportingCriteria          IntraFreqReportingCriteria-r6,
    periodicalReportingCriteria         PeriodicalWithReportingCellStatus,
    noReporting                         ReportingCellStatusOpt
}

IntraFreqReportingCriteria ::=      SEQUENCE {
    eventCriteriaList                   IntraFreqEventCriteriaList      OPTIONAL
}

IntraFreqReportingCriteria-r4 ::=   SEQUENCE {
    eventCriteriaList                   IntraFreqEventCriteriaList-r4   OPTIONAL
}

IntraFreqReportingCriteria-LCR-r4 ::=   SEQUENCE {
    eventCriteriaList                   IntraFreqEventCriteriaList-LCR-r4   OPTIONAL
}

IntraFreqReportingCriteria-r6 ::= SEQUENCE {
    eventCriteriaList                   IntraFreqEventCriteriaList-r6   OPTIONAL
}

IntraFreqReportingQuantity ::=      SEQUENCE {
    activeSetReportingQuantities        CellReportingQuantities,
    monitoredSetReportingQuantities     CellReportingQuantities,
    detectedSetReportingQuantities      CellReportingQuantities             OPTIONAL
}

IntraFreqReportingQuantityForRACH ::= SEQUENCE {
    sfn-SFN-OTD-Type                    SFN-SFN-OTD-Type,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            intraFreqRepQuantityRACH-FDD        IntraFreqRepQuantityRACH-FDD
        },
        tdd                                 SEQUENCE {
            intraFreqRepQuantityRACH-TDDList    IntraFreqRepQuantityRACH-TDDList
        }
    }
}

IntraFreqRepQuantityRACH-FDD ::=    ENUMERATED {
                                    cpich-EcN0, cpich-RSCP,
                                    pathloss, noReport }

IntraFreqRepQuantityRACH-TDD ::=    ENUMERATED {
                                    timeslotISCP,
                                    primaryCCPCH-RSCP,
                                    noReport }

IntraFreqRepQuantityRACH-TDDList ::= SEQUENCE (SIZE (1..2)) OF
                                    IntraFreqRepQuantityRACH-TDD

IntraFrequencyMeasurement ::=       SEQUENCE {
    intraFreqCellInfoList               IntraFreqCellInfoList               OPTIONAL,
```

```
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantity          IntraFreqReportingQuantity          OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    reportCriteria                      IntraFreqReportCriteria             OPTIONAL
}

IntraFrequencyMeasurement-r4 ::=    SEQUENCE {
    intraFreqCellInfoList               IntraFreqCellInfoList-r4            OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantity          IntraFreqReportingQuantity          OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    reportCriteria                      IntraFreqReportCriteria-r4          OPTIONAL
}

IntraFrequencyMeasurement-r6 ::=        SEQUENCE {
    intraFreqCellInfoList               IntraFreqCellInfoList-r4            OPTIONAL,
    intraFreqMeasQuantity               IntraFreqMeasQuantity               OPTIONAL,
    intraFreqReportingQuantity          IntraFreqReportingQuantity          OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    reportCriteria                      IntraFreqReportCriteria-r6
}

IODE ::=                            INTEGER (0..255)

IP-Length ::=                       ENUMERATED {
                                        ipl5, ipl10 }

IP-PCCPCH-r4 ::=                    BOOLEAN

IP-Spacing ::=                      ENUMERATED {
                                        e5, e7, e10, e15, e20,
                                        e30, e40, e50 }

IP-Spacing-TDD ::=                      ENUMERATED {
                                        e30, e40, e50, e70, e100}

IS-2000SpecificMeasInfo ::=         ENUMERATED {
                                        frequency, timeslot, colourcode,
                                        outputpower, pn-Offset }

MaxNumberOfReportingCellsType1 ::=  ENUMERATED {
                                        e1, e2, e3, e4, e5, e6}

MaxNumberOfReportingCellsType2 ::=  ENUMERATED {
                                        e1, e2, e3, e4, e5, e6, e7, e8, e9, e10, e11, e12}

MaxNumberOfReportingCellsType3 ::=  ENUMERATED {
                                        viactCellsPlus1,
                                        viactCellsPlus2,
                                        viactCellsPlus3,
                                        viactCellsPlus4,
                                        viactCellsPlus5,
                                        viactCellsPlus6 }

MaxReportedCellsOnRACH ::=          ENUMERATED {
                                        noReport,
                                        currentCell,
                                        currentAnd-1-BestNeighbour,
                                        currentAnd-2-BestNeighbour,
                                        currentAnd-3-BestNeighbour,
                                        currentAnd-4-BestNeighbour,
                                        currentAnd-5-BestNeighbour,
                                        currentAnd-6-BestNeighbour }

MaxReportedCellsOnRACHinterFreq ::=     INTEGER (1..8)

MeasuredResults ::=                 CHOICE {
    intraFreqMeasuredResultsList        IntraFreqMeasuredResultsList,
    interFreqMeasuredResultsList        InterFreqMeasuredResultsList,
    interRATMeasuredResultsList     InterRATMeasuredResultsList,
    trafficVolumeMeasuredResultsList    TrafficVolumeMeasuredResultsList,
    qualityMeasuredResults              QualityMeasuredResults,
    ue-InternalMeasuredResults          UE-InternalMeasuredResults,
    ue-positioning-MeasuredResults      UE-Positioning-MeasuredResults,
    spare                               NULL
}

MeasuredResults-v390ext ::=                 SEQUENCE {
```

```
    ue-positioning-MeasuredResults-v390ext                UE-Positioning-MeasuredResults-v390ext
}


MeasuredResults-v590ext ::= CHOICE {
    intraFrequencyMeasuredResultsList       IntraFrequencyMeasuredResultsList-v590ext,
    interFrequencyMeasuredResultsList       InterFrequencyMeasuredResultsList-v590ext
}

MeasuredResults-v7xyext ::= CHOICE {
    ueInternalMeasuredResults       UE-InternalMeasuredResults-r7
}

MeasuredResults-LCR-r4 ::=          CHOICE {
    intraFreqMeasuredResultsList        IntraFreqMeasuredResultsList,
    interFreqMeasuredResultsList        InterFreqMeasuredResultsList,
    interRATMeasuredResultsList     InterRATMeasuredResultsList,
    trafficVolumeMeasuredResultsList    TrafficVolumeMeasuredResultsList,
    qualityMeasuredResults              QualityMeasuredResults,
    ue-InternalMeasuredResults          UE-InternalMeasuredResults-LCR-r4,
    ue-positioniing-MeasuredResults     UE-Positioning-MeasuredResults,
    spare                               NULL
}

MeasuredResultsList ::=             SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
                                        MeasuredResults

MeasuredResultsList-LCR-r4-ext ::=  SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
                                        MeasuredResults-LCR-r4

MeasuredResultsOnRACH ::=           SEQUENCE {
    currentCell                         SEQUENCE {
        modeSpecificInfo                    CHOICE {
            fdd                                 SEQUENCE {
                measurementQuantity                 CHOICE {
                    cpich-Ec-N0                         CPICH-Ec-N0,
                    cpich-RSCP                          CPICH-RSCP,
                    pathloss                            Pathloss,
                    spare                               NULL
                }
            },
            tdd                                 SEQUENCE {
                -- For 3.84 Mcps and 7.68 Mcps TDD   --
                timeslotISCP                        TimeslotISCP-List       OPTIONAL,
                primaryCCPCH-RSCP                   PrimaryCCPCH-RSCP       OPTIONAL
            }
        }
    },
    monitoredCells                      MonitoredCellRACH-List              OPTIONAL
}

MeasuredResultsOnRACHinterFreq ::=      SEQUENCE {
    interFreqCellIndication-SIB11           INTEGER (0..1),
    interFreqCellIndication-SIB12           INTEGER (0..1),
    interFreqRACHRepCellsList               InterFreqRACHRepCellsList
}

MeasurementCommand ::=              CHOICE {
    setup                               MeasurementType,
    modify                              SEQUENCE {
        measurementType                     MeasurementType                 OPTIONAL
    },
    release                             NULL
}

MeasurementCommand-r4 ::=           CHOICE {
    setup                               MeasurementType-r4,
    modify                              SEQUENCE {
        measurementType                     MeasurementType-r4              OPTIONAL
    },
    release                             NULL
}

MeasurementCommand-r6 ::=           CHOICE {
    setup                               MeasurementType-r6,
    modify                              SEQUENCE {
        measurementType                     MeasurementType-r6              OPTIONAL
    },
```

```
    release                             NULL
}

MeasurementControlSysInfo ::=       SEQUENCE {
    -- CHOICE cellSelectQualityMeasure represents PCCPCH-RSCP in TDD mode.
    use-of-HCS                      CHOICE  {
        hcs-not-used                SEQUENCE    {
            cellSelectQualityMeasure    CHOICE  {
                cpich-RSCP              SEQUENCE    {
                    intraFreqMeasurementSysInfo         IntraFreqMeasurementSysInfo-RSCP
    OPTIONAL,
                    interFreqMeasurementSysInfo         InterFreqMeasurementSysInfo-RSCP    OPTIONAL
                },
                cpich-Ec-N0             SEQUENCE    {
                    intraFreqMeasurementSysInfo         IntraFreqMeasurementSysInfo-ECN0
    OPTIONAL,
                    interFreqMeasurementSysInfo         InterFreqMeasurementSysInfo-ECN0    OPTIONAL
                }
            },
            interRATMeasurementSysInfo      InterRATMeasurementSysInfo-B        OPTIONAL
        },
        hcs-used                    SEQUENCE    {
            cellSelectQualityMeasure    CHOICE  {
                cpich-RSCP              SEQUENCE    {
                    intraFreqMeasurementSysInfo         IntraFreqMeasurementSysInfo-HCS-RSCP
    OPTIONAL,
                    interFreqMeasurementSysInfo         InterFreqMeasurementSysInfo-HCS-RSCP
    OPTIONAL
                },
                cpich-Ec-N0             SEQUENCE    {
                    intraFreqMeasurementSysInfo         IntraFreqMeasurementSysInfo-HCS-ECN0
    OPTIONAL,
                    interFreqMeasurementSysInfo         InterFreqMeasurementSysInfo-HCS-ECN0
    OPTIONAL            }
            },
            interRATMeasurementSysInfo      InterRATMeasurementSysInfo      OPTIONAL
        }
    },

    trafficVolumeMeasSysInfo            TrafficVolumeMeasSysInfo            OPTIONAL,
    -- dummy is not used in this version of specification and it shall be ignored by the UE.
    dummy       UE-InternalMeasurementSysInfo       OPTIONAL
}

MeasurementControlSysInfoExtension ::= SEQUENCE {
    -- CHOICE cellSelectQualityMeasure represents PCCPCH-RSCP in TDD mode.
    use-of-HCS                      CHOICE {
        hcs-not-used                SEQUENCE {
            cellSelectQualityMeasure        CHOICE {
                cpich-RSCP                      SEQUENCE {
                    newIntraFreqCellList            NewIntraFreqCellSI-List-RSCP    OPTIONAL,
                    newInterFreqCellList            NewInterFreqCellSI-List-RSCP    OPTIONAL
                },
                cpich-Ec-N0                     SEQUENCE {
                    newIntraFreqCellList            NewIntraFreqCellSI-List-ECN0    OPTIONAL,
                    newInterFreqCellList            NewInterFreqCellSI-List-ECN0    OPTIONAL
                }
            },
            newInterRATCellList             NewInterRATCellList             OPTIONAL
        },
        hcs-used                    SEQUENCE {
            cellSelectQualityMeasure        CHOICE {
                cpich-RSCP                      SEQUENCE {
                    newIntraFreqCellList            NewIntraFreqCellSI-List-HCS-RSCP    OPTIONAL,
                    newInterFreqCellList            NewInterFreqCellSI-List-HCS-RSCP    OPTIONAL
                },
                cpich-Ec-N0                     SEQUENCE {
                    newIntraFreqCellList            NewIntraFreqCellSI-List-HCS-ECN0    OPTIONAL,
                    newInterFreqCellList            NewInterFreqCellSI-List-HCS-ECN0    OPTIONAL
                }
            },
            newInterRATCellList             NewInterRATCellList             OPTIONAL
        }
    }
}

MeasurementControlSysInfoExtensionAddon-r5 ::= SEQUENCE {
    --The order of the list corresponds to the order of cell in newIntraFrequencyCellInfoList
```

```
    newIntraFrequencyCellInfoListAddon-r5   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    --The order of the list corresponds to the order of cell in newInterFrequencyCellInfoList
    newInterFrequencyCellInfoListAddon-r5   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    --The order of the list corresponds to the order of cell in newInterRATCellInfoList
    newInterRATCellInfoListAddon-r5         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL
}

MeasurementControlSysInfoExtension-LCR-r4 ::= SEQUENCE {
    -- CHOICE cellSelectQualityMeasure represents PCCPCH-RSCP in TDD mode.
    use-of-HCS                  CHOICE {
        hcs-not-used                SEQUENCE {
            cellSelectQualityMeasure    CHOICE {
                cpich-RSCP                  SEQUENCE {
                    newIntraFreqCellList        NewIntraFreqCellSI-List-RSCP-LCR-r4 OPTIONAL,
                    newInterFreqCellList        NewInterFreqCellSI-List-RSCP-LCR-r4 OPTIONAL
                },
                cpich-Ec-N0                 SEQUENCE {
                    newIntraFreqCellList        NewIntraFreqCellSI-List-ECN0-LCR-r4 OPTIONAL,
                    newInterFreqCellList        NewInterFreqCellSI-List-ECN0-LCR-r4 OPTIONAL
                }
            },
            newInterRATCellList         NewInterRATCellList                 OPTIONAL
        },
        hcs-used                    SEQUENCE {
            cellSelectQualityMeasure    CHOICE {
                cpich-RSCP                  SEQUENCE {
                    newIntraFreqCellList        NewIntraFreqCellSI-List-HCS-RSCP-LCR-r4 OPTIONAL,
                    newInterFreqCellList        NewInterFreqCellSI-List-HCS-RSCP-LCR-r4 OPTIONAL
                },
                cpich-Ec-N0                 SEQUENCE {
                    newIntraFreqCellList        NewIntraFreqCellSI-List-HCS-ECN0-LCR-r4 OPTIONAL,
                    newInterFreqCellList        NewInterFreqCellSI-List-HCS-ECN0-LCR-r4 OPTIONAL
                }
            },
            newInterRATCellList         NewInterRATCellList                 OPTIONAL
        }
    }
}

MeasurementControlSysInfo-LCR-r4-ext ::=    SEQUENCE {
    -- CHOICE use-of-HCS shall have the same value as the use-of-HCS
    -- in MeasurementControlSysInfo
    -- CHOICE cellSelectQualityMeasure represents PCCPCH-RSCP in TDD mode.
    use-of-HCS                      CHOICE  {
        hcs-not-used                SEQUENCE    {
            -- CHOICE cellSelectQualityMeasure shall have the same value as the
            -- cellSelectQualityMeasure in MeasurementControlSysInfo
            cellSelectQualityMeasure    CHOICE  {
                cpich-RSCP              SEQUENCE    {
                    intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-RSCP-LCR-r4 OPTIONAL,
                    interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-RSCP-LCR-r4 OPTIONAL
                },
                cpich-Ec-N0             SEQUENCE    {
                    intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-ECN0-LCR-r4 OPTIONAL,
                    interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-ECN0-LCR-r4 OPTIONAL
                }
            }
        },
        hcs-used                    SEQUENCE    {
            -- CHOICE cellSelectQualityMeasure shall have the same value as the
            -- cellSelectQualityMeasure in MeasurementControlSysInfo
            cellSelectQualityMeasure    CHOICE  {
                cpich-RSCP              SEQUENCE    {
                    intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-RSCP-LCR-r4
    OPTIONAL,
                    interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-RSCP-LCR-r4 OPTIONAL
                },
                cpich-Ec-N0             SEQUENCE    {
                    intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-ECN0-LCR-r4
    OPTIONAL,
                    interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-ECN0-LCR-r4 OPTIONAL
                }
            }
        }
    }
```

```
}

MeasurementIdentity ::=     INTEGER (1..16)

MeasurementQuantityGSM ::=          ENUMERATED {
                                        gsm-CarrierRSSI,
                                        dummy }

MeasurementReportingMode ::=        SEQUENCE {
    measurementReportTransferMode       TransferMode,
    periodicalOrEventTrigger            PeriodicalOrEventTrigger
}

MeasurementType ::=                 CHOICE {
    intraFrequencyMeasurement           IntraFrequencyMeasurement,
    interFrequencyMeasurement           InterFrequencyMeasurement,
    interRATMeasurement                 InterRATMeasurement,
    ue-positioning-Measurement          UE-Positioning-Measurement,
    trafficVolumeMeasurement            TrafficVolumeMeasurement,
    qualityMeasurement                  QualityMeasurement,
    ue-InternalMeasurement              UE-InternalMeasurement
}

MeasurementType-r4 ::=              CHOICE {
    intraFrequencyMeasurement           IntraFrequencyMeasurement-r4,
    interFrequencyMeasurement           InterFrequencyMeasurement-r4,
    interRATMeasurement                 InterRATMeasurement-r4,
    up-Measurement                      UE-Positioning-Measurement-r4,
    trafficVolumeMeasurement            TrafficVolumeMeasurement,
    qualityMeasurement                  QualityMeasurement,
    ue-InternalMeasurement              UE-InternalMeasurement-r4
}

MeasurementType-r6 ::=              CHOICE {
    intraFrequencyMeasurement           IntraFrequencyMeasurement-r6,
    interFrequencyMeasurement           InterFrequencyMeasurement-r6,
    interRATMeasurement                 InterRATMeasurement-r6,
    up-Measurement                      UE-Positioning-Measurement-r4,
    trafficVolumeMeasurement            TrafficVolumeMeasurement,
    qualityMeasurement                  QualityMeasurement,
    ue-InternalMeasurement              UE-InternalMeasurement-r4
}

MeasurementValidity ::=             SEQUENCE {
    ue-State                            ENUMERATED {
                                            cell-DCH, all-But-Cell-DCH, all-States }
}

MonitoredCellRACH-List ::=          SEQUENCE (SIZE (1..8)) OF
                                        MonitoredCellRACH-Result

MonitoredCellRACH-Result ::=        SEQUENCE {
    sfn-SFN-ObsTimeDifference           SFN-SFN-ObsTimeDifference           OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info,
            measurementQuantity                 CHOICE {
                cpich-Ec-N0                         CPICH-Ec-N0,
                cpich-RSCP                          CPICH-RSCP,
                pathloss                            Pathloss,
                spare                               NULL
            }                                                               OPTIONAL
        },
        tdd                                 SEQUENCE {
            cellParametersID                    CellParametersID,
            primaryCCPCH-RSCP                   PrimaryCCPCH-RSCP
        }
    }
}

MultipathIndicator ::=              ENUMERATED {
                                        nm,
                                        low,
                                        medium,
                                        high }

N-CR-T-CRMaxHyst ::=                SEQUENCE {
    n-CR                                INTEGER (1..16)                     DEFAULT 8,
```

```
    t-CRMaxHyst                         T-CRMaxHyst
}

NavigationModelSatInfo ::=          SEQUENCE {
    satID                               SatID,
    satelliteStatus                     SatelliteStatus,
    ephemerisParameter                  EphemerisParameter      OPTIONAL
}

NavigationModelSatInfoList ::=      SEQUENCE (SIZE (1..maxSat)) OF
                                        NavigationModelSatInfo

EphemerisParameter ::=                      SEQUENCE {
    codeOnL2                            BIT STRING (SIZE (2)),
    uraIndex                            BIT STRING (SIZE (4)),
    satHealth                           BIT STRING (SIZE (6)),
    iodc                                BIT STRING (SIZE (10)),
    l2Pflag                             BIT STRING (SIZE (1)),
    sf1Revd                             SubFrame1Reserved,
    t-GD                                BIT STRING (SIZE (8)),
    t-oc                                BIT STRING (SIZE (16)),
    af2                                 BIT STRING (SIZE (8)),
    af1                                 BIT STRING (SIZE (16)),
    af0                                 BIT STRING (SIZE (22)),
    c-rs                                BIT STRING (SIZE (16)),
    delta-n                             BIT STRING (SIZE (16)),
    m0                                  BIT STRING (SIZE (32)),
    c-uc                                BIT STRING (SIZE (16)),
    e                                   BIT STRING (SIZE (32)),
    c-us                                BIT STRING (SIZE (16)),
    a-Sqrt                              BIT STRING (SIZE (32)),
    t-oe                                BIT STRING (SIZE (16)),
    fitInterval                         BIT STRING (SIZE (1)),
    aodo                                BIT STRING (SIZE (5)),
    c-ic                                BIT STRING (SIZE (16)),
    omega0                              BIT STRING (SIZE (32)),
    c-is                                BIT STRING (SIZE (16)),
    i0                                  BIT STRING (SIZE (32)),
    c-rc                                BIT STRING (SIZE (16)),
    omega                               BIT STRING (SIZE (32)),
    omegaDot                            BIT STRING (SIZE (24)),
    iDot                                BIT STRING (SIZE (14))
}
NC-Mode ::=                         BIT STRING (SIZE (3))

Neighbour ::=                       SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            neighbourIdentity                   PrimaryCPICH-Info                   OPTIONAL,
            uE-RX-TX-TimeDifferenceType2Info    UE-RX-TX-TimeDifferenceType2Info    OPTIONAL
        },
        tdd                             SEQUENCE {
            neighbourAndChannelIdentity     CellAndChannelIdentity                  OPTIONAL
        }
    },
    neighbourQuality                    NeighbourQuality,
    sfn-SFN-ObsTimeDifference2          SFN-SFN-ObsTimeDifference2}

Neighbour-v390ext ::=                       SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            frequencyInfo                       FrequencyInfo
        },
        tdd                             NULL
    }
}

NeighbourList ::=                   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        Neighbour

-- The order of the cells in IE NeighbourList-v390ext shall be the
-- same as the order in IE NeighbourList
NeighbourList-v390ext ::=                   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        Neighbour-v390ext

NeighbourQuality ::=                SEQUENCE {
    ue-Positioning-OTDOA-Quality        UE-Positioning-OTDOA-Quality
}
```

```
NewInterFreqCell ::=                SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfo
}

NewInterFreqCell-r4 ::=             SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfo-r4
}

NewInterFreqCellList ::=            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCell

NewInterFreqCellList-r4 ::=         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCell-r4

NewInterFreqCellSI-RSCP ::=             SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-RSCP
}

NewInterFreqCellSI-ECN0 ::=             SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-ECN0
}

NewInterFreqCellSI-HCS-RSCP ::=             SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-HCS-RSCP
}

NewInterFreqCellSI-HCS-ECN0 ::=             SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-HCS-ECN0
}

NewInterFreqCellSI-RSCP-LCR-r4 ::=          SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-RSCP-LCR-r4
}

NewInterFreqCellSI-ECN0-LCR-r4 ::=          SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-ECN0-LCR-r4
}

NewInterFreqCellSI-HCS-RSCP-LCR-r4 ::=      SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-HCS-RSCP-LCR-r4
}

NewInterFreqCellSI-HCS-ECN0-LCR-r4 ::=      SEQUENCE {
    interFreqCellID                     InterFreqCellID                     OPTIONAL,
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellInfo                            CellInfoSI-HCS-ECN0-LCR-r4
}

NewInterFreqCellSI-List-ECN0 ::=            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-ECN0

NewInterFreqCellSI-List-HCS-RSCP ::=            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-HCS-RSCP

NewInterFreqCellSI-List-HCS-ECN0 ::=            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-HCS-ECN0

NewInterFreqCellSI-List-RSCP ::=        SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-RSCP
```

```
NewInterFreqCellSI-List-ECN0-LCR-r4 ::=     SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-ECN0-LCR-r4

NewInterFreqCellSI-List-HCS-RSCP-LCR-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-HCS-RSCP-LCR-r4

NewInterFreqCellSI-List-HCS-ECN0-LCR-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-HCS-ECN0-LCR-r4

NewInterFreqCellSI-List-RSCP-LCR-r4 ::=     SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterFreqCellSI-RSCP-LCR-r4

NewInterRATCell ::=             SEQUENCE {
    interRATCellID                      InterRATCellID          OPTIONAL,
    technologySpecificInfo              CHOICE {
        gsm                                 SEQUENCE {
            cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12     OPTIONAL,
            interRATCellIndividualOffset        InterRATCellIndividualOffset,
            bsic                                BSIC,
            frequency-band                      Frequency-Band,
            bcch-ARFCN                          BCCH-ARFCN,
            -- dummy is not used in this version of the specification, it should
            -- not be sent and if received it should be ignored.
            dummy                               NULL                OPTIONAL
        },
        is-2000                             SEQUENCE {
            is-2000SpecificMeasInfo             IS-2000SpecificMeasInfo
        },
        -- ASN.1 inconsistency: NewInterRATCellList should be optional within
        -- InterRATCellInfoList. The UE shall consider IE NewInterRATCell with
        -- technologySpecificInfo set to "absent" as valid and handle the
        -- message as if the IE NewInterRATCell was absent
        absent                              NULL,
        spare1                              NULL
    }
}

NewInterRATCell-B ::=               SEQUENCE {
    interRATCellID                      InterRATCellID              OPTIONAL,
    technologySpecificInfo              CHOICE {
        gsm                                 SEQUENCE {
            cellSelectionReselectionInfo        CellSelectReselectInfoSIB-11-12     OPTIONAL,
            interRATCellIndividualOffset        InterRATCellIndividualOffset,
            bsic                                BSIC,
            frequency-band                      Frequency-Band,
            bcch-ARFCN                          BCCH-ARFCN,
            -- dummy is not used in this version of the specification, it should
            -- not be sent and if received it should be ignored.
            dummy                               NULL                OPTIONAL
        },
        is-2000                             SEQUENCE {
            is-2000SpecificMeasInfo             IS-2000SpecificMeasInfo
        },
        -- ASN.1 inconsistency: NewInterRATCellList-B should be optional within
        -- InterRATCellInfoList-B. The UE shall consider IE NewInterRATCell-B with
        -- technologySpecificInfo set to "absent" as valid and handle the
        -- message as if the IE NewInterRATCell-B was absent
        absent                              NULL,
        spare1                              NULL
    }
}

NewInterRATCellList ::=         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterRATCell

NewInterRATCellList-B ::=           SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewInterRATCell-B

NewIntraFreqCell ::=                SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfo
}

NewIntraFreqCell-r4 ::=             SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfo-r4
}
```

```
NewIntraFreqCellList ::=            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCell

NewIntraFreqCellList-r4 ::=         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCell-r4

NewIntraFreqCellSI-RSCP ::=             SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-RSCP
}

NewIntraFreqCellSI-ECN0 ::=         SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-ECN0
}
NewIntraFreqCellSI-HCS-RSCP ::=     SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-HCS-RSCP
}

NewIntraFreqCellSI-HCS-ECN0 ::=     SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-HCS-ECN0
}

NewIntraFreqCellSI-RSCP-LCR-r4 ::=      SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-RSCP-LCR-r4
}

NewIntraFreqCellSI-ECN0-LCR-r4 ::=      SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-ECN0-LCR-r4
}
NewIntraFreqCellSI-HCS-RSCP-LCR-r4 ::=  SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-HCS-RSCP-LCR-r4
}

NewIntraFreqCellSI-HCS-ECN0-LCR-r4 ::=  SEQUENCE {
    intraFreqCellID                     IntraFreqCellID                     OPTIONAL,
    cellInfo                            CellInfoSI-HCS-ECN0-LCR-r4
}

NewIntraFreqCellSI-List-RSCP ::=        SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            NewIntraFreqCellSI-RSCP

NewIntraFreqCellSI-List-ECN0 ::=        SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCellSI-ECN0

NewIntraFreqCellSI-List-HCS-RSCP ::=    SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCellSI-HCS-RSCP

NewIntraFreqCellSI-List-HCS-ECN0 ::=    SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCellSI-HCS-ECN0

NewIntraFreqCellSI-List-RSCP-LCR-r4 ::=     SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            NewIntraFreqCellSI-RSCP-LCR-r4

NewIntraFreqCellSI-List-ECN0-LCR-r4 ::=     SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCellSI-ECN0-LCR-r4

NewIntraFreqCellSI-List-HCS-RSCP-LCR-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCellSI-HCS-RSCP-LCR-r4

NewIntraFreqCellSI-List-HCS-ECN0-LCR-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        NewIntraFreqCellSI-HCS-ECN0-LCR-r4

    -- IE "nonUsedFreqThreshold" is not needed in case of event 2a
    -- In case of event 2a UTRAN should include value 0 within IE "nonUsedFreqThreshold"
    -- In case of event 2a, the UE shall be ignore IE "nonUsedFreqThreshold"
    -- In later versions of the message including this IE, a special version of
    -- IE "NonUsedFreqParameterList" may be defined for event 2a, namely a
    -- version not including IE "nonUsedFreqThreshold"
NonUsedFreqParameter ::=            SEQUENCE {
    nonUsedFreqThreshold                Threshold,
    nonUsedFreqW                        W
```

```
}

NonUsedFreqParameter-r6 ::=         SEQUENCE {
    nonUsedFreqThreshold                Threshold-r6,
    nonUsedFreqW                        W
}

NonUsedFreqParameterList ::=        SEQUENCE (SIZE (1..maxFreq)) OF
                                        NonUsedFreqParameter

NonUsedFreqParameterList-r6 ::=     SEQUENCE (SIZE (1..maxFreq)) OF
                                        NonUsedFreqParameter-r6

NonUsedFreqWList-r6 ::=     SEQUENCE (SIZE (1..maxFreq)) OF W

ObservedTimeDifferenceToGSM ::=     INTEGER (0..4095)

OTDOA-SearchWindowSize ::=          ENUMERATED {
                                        c20, c40, c80, c160, c320,
                                        c640, c1280, moreThan1280 }

-- SPARE: Pathloss, Max = 158
-- Values above Max are spare
Pathloss ::=                        INTEGER (46..173)

PenaltyTime-RSCP ::=                CHOICE {
    notUsed                             NULL,
    pt10                                TemporaryOffset1,
    pt20                                TemporaryOffset1,
    pt30                                TemporaryOffset1,
    pt40                                TemporaryOffset1,
    pt50                                TemporaryOffset1,
    pt60                                TemporaryOffset1
}

PenaltyTime-ECN0 ::=                CHOICE {
    notUsed                             NULL,
    pt10                                TemporaryOffsetList,
    pt20                                TemporaryOffsetList,
    pt30                                TemporaryOffsetList,
    pt40                                TemporaryOffsetList,
    pt50                                TemporaryOffsetList,
    pt60                                TemporaryOffsetList
}

PendingTimeAfterTrigger ::=         ENUMERATED {
                                        ptat0-25, ptat0-5, ptat1,
                                        ptat2, ptat4, ptat8, ptat16 }

PeriodicalOrEventTrigger ::=        ENUMERATED {
                                        periodical,
                                        eventTrigger }

PeriodicalReportingCriteria ::=     SEQUENCE {
    reportingAmount                     ReportingAmount                 DEFAULT ra-Infinity,
    reportingInterval                   ReportingIntervalLong
}

PeriodicalWithReportingCellStatus ::= SEQUENCE {
    periodicalReportingCriteria         PeriodicalReportingCriteria,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

PLMNIdentitiesOfNeighbourCells ::=  SEQUENCE {
        plmnsOfIntraFreqCellsList       PLMNsOfIntraFreqCellsList           OPTIONAL,
        plmnsOfInterFreqCellsList       PLMNsOfInterFreqCellsList           OPTIONAL,
        plmnsOfInterRATCellsList        PLMNsOfInterRATCellsList            OPTIONAL
}

PLMNsOfInterFreqCellsList ::=           SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            SEQUENCE {
    plmn-Identity                               PLMN-Identity               OPTIONAL
}

PLMNsOfIntraFreqCellsList ::=           SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            SEQUENCE {
    plmn-Identity                               PLMN-Identity               OPTIONAL
}
```

```
PLMNsOfInterRATCellsList ::=            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            SEQUENCE {
    plmn-Identity                               PLMN-Identity               OPTIONAL
}

PositionEstimate ::=                CHOICE {
    ellipsoidPoint                      EllipsoidPoint,
    ellipsoidPointUncertCircle          EllipsoidPointUncertCircle,
    ellipsoidPointUncertEllipse         EllipsoidPointUncertEllipse,
    ellipsoidPointAltitude              EllipsoidPointAltitude,
    ellipsoidPointAltitudeEllipse       EllipsoidPointAltitudeEllipsoide
}

PositioningMethod ::=               ENUMERATED {
                                        otdoa,
                                        gps,
                                        otdoaOrGPS, cellID }

-- Actual value PRC = IE value * 0.32
PRC ::=                             INTEGER (-2047..2047)

-- SPARE: PrimaryCCPCH-RSCP, Max = 91
-- Values above Max are spare
PrimaryCCPCH-RSCP ::=               INTEGER (0..127)

Q-HCS ::=                           INTEGER (0..99)

Q-OffsetS-N ::=                     INTEGER (-50..50)

Q-QualMin ::=                       INTEGER (-24..0)

-- Actual value Q-RxlevMin = (IE value * 2) + 1
Q-RxlevMin ::=                      INTEGER (-58..-13)

QualityEventResults ::=             SEQUENCE (SIZE (1..maxTrCH)) OF
                                        TransportChannelIdentity

QualityMeasuredResults ::=          SEQUENCE {
    blerMeasurementResultsList          BLER-MeasurementResultsList         OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 NULL,
        tdd                                 SEQUENCE {
            sir-MeasurementResults              SIR-MeasurementList         OPTIONAL
        }
    }
}

QualityMeasurement ::=              SEQUENCE {
    qualityReportingQuantity            QualityReportingQuantity            OPTIONAL,
    reportCriteria                      QualityReportCriteria
}

QualityReportCriteria ::=           CHOICE {
    qualityReportingCriteria            QualityReportingCriteria,
    periodicalReportingCriteria         PeriodicalReportingCriteria,
    noReporting                         NULL
}

QualityReportingCriteria ::=        SEQUENCE (SIZE (1..maxTrCH)) OF
                                        QualityReportingCriteriaSingle

QualityReportingCriteriaSingle ::=  SEQUENCE {
    transportChannelIdentity            TransportChannelIdentity,
    totalCRC                            INTEGER (1..512),
    badCRC                              INTEGER (1..512),
    pendingAfterTrigger                 INTEGER (1..512)
}

QualityReportingQuantity ::=        SEQUENCE {
    dl-TransChBLER                      BOOLEAN,
    bler-dl-TransChIdList               BLER-TransChIdList                  OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                                 NULL,
        tdd                                 SEQUENCE {
            sir-TFCS-List                       SIR-TFCS-List               OPTIONAL
        }
    }
```

```
}

RAT-Type ::=                        ENUMERATED {
                                        gsm, is2000 }

ReferenceCellPosition ::=           CHOICE {
    ellipsoidPoint                      EllipsoidPoint,
    ellipsoidPointWithAltitude          EllipsoidPointAltitude
}

-- ReferenceLocation, as defined in 23.032
ReferenceLocation ::=           SEQUENCE {
    ellipsoidPointAltitudeEllipsoide        EllipsoidPointAltitudeEllipsoide
}

ReferenceTimeDifferenceToCell ::=   CHOICE {
    -- Actual value accuracy40 = IE value * 40
    accuracy40                          INTEGER (0..960),
    -- Actual value accuracy256 = IE value * 256
    accuracy256                         INTEGER (0..150),
    -- Actual value accuracy2560 = IE value * 2560
    accuracy2560                        INTEGER (0..15)
}

RemovedInterFreqCellList ::=        CHOICE {
    removeAllInterFreqCells             NULL,
    removeSomeInterFreqCells            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            InterFreqCellID,
    removeNoInterFreqCells              NULL
}

RemovedInterRATCellList ::=     CHOICE {
    removeAllInterRATCells          NULL,
    removeSomeInterRATCells         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            InterRATCellID,
    removeNoInterRATCells           NULL
}

RemovedIntraFreqCellList ::=        CHOICE {
    removeAllIntraFreqCells             NULL,
    removeSomeIntraFreqCells            SEQUENCE (SIZE (1..maxCellMeas)) OF
                                            IntraFreqCellID,
    removeNoIntraFreqCells              NULL
}

ReplacementActivationThreshold ::=  ENUMERATED {
                                        notApplicable, t1, t2,
                                        t3, t4, t5, t6, t7 }

ReportDeactivationThreshold ::=     ENUMERATED {
                                        notApplicable, t1, t2,
                                        t3, t4, t5, t6, t7 }

ReportingAmount ::=                 ENUMERATED {
                                        ra1, ra2, ra4, ra8, ra16, ra32,
                                        ra64, ra-Infinity }

ReportingCellStatus ::=             CHOICE{
    withinActiveSet                     MaxNumberOfReportingCellsType1,
    withinMonitoredSetUsedFreq          MaxNumberOfReportingCellsType1,
    withinActiveAndOrMonitoredUsedFreq  MaxNumberOfReportingCellsType1,
    withinDetectedSetUsedFreq           MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrDetectedUsedFreq
                                        MaxNumberOfReportingCellsType1,
    allActiveplusMonitoredSet           MaxNumberOfReportingCellsType3,
    allActivePlusDetectedSet            MaxNumberOfReportingCellsType3,
    allActivePlusMonitoredAndOrDetectedSet
                                        MaxNumberOfReportingCellsType3,
    withinVirtualActSet             MaxNumberOfReportingCellsType1,
    withinMonitoredSetNonUsedFreq       MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrVirtualActiveSetNonUsedFreq
                                        MaxNumberOfReportingCellsType1,
    allVirtualActSetplusMonitoredSetNonUsedFreq
                                        MaxNumberOfReportingCellsType3,
    withinActSetOrVirtualActSet-InterRATcells
                                        MaxNumberOfReportingCellsType2,
    withinActSetAndOrMonitoredUsedFreqOrVirtualActSetAndOrMonitoredNonUsedFreq
                                        MaxNumberOfReportingCellsType2
```

```
}

ReportingCellStatusOpt ::=          SEQUENCE {
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}


ReportingInfoForCellDCH ::=         SEQUENCE {
    intraFreqReportingQuantity          IntraFreqReportingQuantity,
    measurementReportingMode            MeasurementReportingMode,
    reportCriteria                      CellDCH-ReportCriteria
}

ReportingInfoForCellDCH-LCR-r4 ::=  SEQUENCE {
    intraFreqReportingQuantity          IntraFreqReportingQuantity,
    measurementReportingMode            MeasurementReportingMode,
    reportCriteria                      CellDCH-ReportCriteria-LCR-r4
}

ReportingInterval ::=               ENUMERATED {
                                        noPeriodicalreporting, ri0-25,
                                        ri0-5, ri1, ri2, ri4, ri8, ri16 }

ReportingIntervalLong ::=           ENUMERATED {
                                        ril0, ril0-25, ril0-5, ril1,
                                        ril2, ril3, ril4, ril6, ril8,
                                        ril12, ril16, ril20, ril24,
                                        ril28, ril32, ril64 }
                                    -- When the value "ril0" is used, the UE behaviour is not
                                    -- defined.

-- Actual value ReportingRange = IE value * 0.5
ReportingRange ::=                  INTEGER (0..29)

RL-AdditionInfoList ::=             SEQUENCE (SIZE (1..maxRL)) OF
                                        PrimaryCPICH-Info

RL-InformationLists ::=             SEQUENCE {
    rl-AdditionInfoList                 RL-AdditionInfoList                 OPTIONAL,
    rL-RemovalInformationList           RL-RemovalInformationList           OPTIONAL
}

RLC-BuffersPayload ::=              ENUMERATED {
                                        pl0, pl4, pl8, pl16, pl32,
                                        pl64, pl128, pl256, pl512, pl1024,
                                        pl2k, pl4k, pl8k, pl16k, pl32k,
                                        pl64k, pl128k, pl256k, pl512k, pl1024k,
                                        spare12, spare11, spare10, spare9, spare8,
                                        spare7, spare6, spare5, spare4, spare3,
                                        spare2, spare1 }

-- Actual value RRC = IE value * 0.032
RRC ::=                             INTEGER (-127..127)

SatData ::=                         SEQUENCE{
    satID                               SatID,
    iode                                IODE
}

SatDataList ::=                     SEQUENCE (SIZE (0..maxSat)) OF
                                        SatData

SatelliteStatus ::=                 ENUMERATED {
                                        ns-NN-U,
                                        es-SN,
                                        es-NN-U,
                                        rev2,
                                        rev }

-- Identifies the satellite and is equal to (SV ID No - 1) where SV ID No is defined in [12].
SatID ::=                           INTEGER (0..63)

SFN-Offset-Validity ::=         ENUMERATED { false }

SFN-SFN-Drift ::=                   ENUMERATED {
                                        sfnsfndrift0, sfnsfndrift1, sfnsfndrift2,
                                        sfnsfndrift3, sfnsfndrift4, sfnsfndrift5,
                                        sfnsfndrift8, sfnsfndrift10, sfnsfndrift15,
```

```
                                    sfnsfndrift25, sfnsfndrift35, sfnsfndrift50,
                                    sfnsfndrift65, sfnsfndrift80, sfnsfndrift100,
                                    sfnsfndrift-1, sfnsfndrift-2, sfnsfndrift-3,
                                    sfnsfndrift-4, sfnsfndrift-5, sfnsfndrift-8,
                                    sfnsfndrift-10, sfnsfndrift-15, sfnsfndrift-25,
                                    sfnsfndrift-35, sfnsfndrift-50, sfnsfndrift-65,
                                    sfnsfndrift-80, sfnsfndrift-100}

SFN-SFN-ObsTimeDifference ::=       CHOICE {
    type1                               SFN-SFN-ObsTimeDifference1,
    type2                               SFN-SFN-ObsTimeDifference2
}

-- SPARE: SFN-SFN-ObsTimeDifference1, Max = 9830399
-- For 1.28Mcps TDD, Max value of SFN-SFN-ObsTimeDifference1 is 3276799.
-- Values above Max are spare
SFN-SFN-ObsTimeDifference1 ::=      INTEGER (0..16777215)

-- SPARE: SFN-SFN-ObsTimeDifference2, Max = 40961
-- For 1.28Mcps TDD, Max value of SFN-SFN-ObsTimeDifference2 is 27649.
-- Values above Max are spare
SFN-SFN-ObsTimeDifference2 ::=      INTEGER (0..65535)

SFN-SFN-OTD-Type ::=                ENUMERATED {
                                        noReport,
                                        type1,
                                        type2 }

SFN-SFN-RelTimeDifference1 ::=      SEQUENCE {
    sfn-Offset                          INTEGER (0 .. 4095),
    sfn-sfn-Reltimedifference           INTEGER (0.. 38399)
}

SFN-TOW-Uncertainty ::=             ENUMERATED {
                                        lessThan10,
                                        moreThan10 }


SIR ::=                             INTEGER (0..63)


SIR-MeasurementList ::=             SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        SIR-MeasurementResults


SIR-MeasurementResults ::=          SEQUENCE {
    tfcs-ID                             TFCS-IdentityPlain,
    sir-TimeslotList                    SIR-TimeslotList
}

SIR-TFCS ::=                        TFCS-IdentityPlain


SIR-TFCS-List ::=                   SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        SIR-TFCS

SIR-TimeslotList ::=                SEQUENCE (SIZE (1..maxTS)) OF
                                        SIR

-- SubFrame1Reserved, reserved bits in subframe 1 of the GPS navigation message
SubFrame1Reserved ::=               SEQUENCE {
    reserved1                           BIT STRING (SIZE (23)),
    reserved2                           BIT STRING (SIZE (24)),
    reserved3                           BIT STRING (SIZE (24)),
    reserved4                           BIT STRING (SIZE (16))
}

T-ADVinfo ::=                       SEQUENCE {
                t-ADV                   INTEGER(0..2047),
                sfn                     INTEGER(0..4095)
}

T-CRMax ::=                         CHOICE {
    notUsed                             NULL,
    t30                                 N-CR-T-CRMaxHyst,
    t60                                 N-CR-T-CRMaxHyst,
    t120                                N-CR-T-CRMaxHyst,
    t180                                N-CR-T-CRMaxHyst,
```

```
    t240                                N-CR-T-CRMaxHyst
}

T-CRMaxHyst ::=                     ENUMERATED {
                                        notUsed, t10, t20, t30,
                                        t40, t50, t60, t70 }

TemporaryOffset1 ::=                ENUMERATED {
                                        to3, to6, to9, to12, to15,
                                        to18, to21, infinite }

TemporaryOffset2 ::=                ENUMERATED {
                                        to2, to3, to4, to6, to8,
                                        to10, to12, infinite }

TemporaryOffsetList ::=             SEQUENCE    {
        temporaryOffset1                TemporaryOffset1,
        temporaryOffset2                TemporaryOffset2
}

Threshold ::=                       INTEGER (-115..0)

Threshold-r6 ::=                            INTEGER (-120..0)

-- The order of the list corresponds to the order of frequency defined in Inter-FreqEventCriteria
ThreholdNonUsedFrequency-deltaList ::= SEQUENCE (SIZE (1..maxFreq)) OF
                                        DeltaRSCPPerCell

ThresholdPositionChange ::=         ENUMERATED {
                                        pc10, pc20, pc30, pc40, pc50,
                                        pc100, pc200, pc300, pc500,
                                        pc1000, pc2000, pc5000, pc10000,
                                        pc20000, pc50000, pc100000 }

ThresholdSFN-GPS-TOW ::=            ENUMERATED {
                                        ms1, ms2, ms3, ms5, ms10,
                                        ms20, ms50, ms100 }

ThresholdSFN-SFN-Change ::=         ENUMERATED {
                                        c0-25, c0-5, c1, c2, c3, c4, c5,
                                        c10, c20, c50, c100, c200, c500,
                                        c1000, c2000, c5000 }

ThresholdUsedFrequency ::=          INTEGER (-115..165)

ThresholdUsedFrequency-r6 ::=       INTEGER (-120..165)

-- Actual value TimeInterval = IE value * 20.
TimeInterval ::=                    INTEGER (1..13)


TimeslotInfo ::=                    SEQUENCE {
    timeslotNumber                      TimeslotNumber,
    burstType                           BurstType
}

TimeslotInfo-LCR-r4 ::=             SEQUENCE {
    timeslotNumber                      TimeslotNumber-LCR-r4
}

TimeslotInfoList ::=                SEQUENCE (SIZE (1..maxTS)) OF
                                        TimeslotInfo

TimeslotInfoList-LCR-r4 ::=         SEQUENCE (SIZE (1..maxTS-LCR)) OF
                                        TimeslotInfo-LCR-r4

TimeslotInfoList-r4 ::=             CHOICE {
    -- the choice for 7.68 Mcps TDD is the same as for 3.84 Mcps TDD --
    tdd384                              SEQUENCE (SIZE (1..maxTS)) OF
                                            TimeslotInfo,
    tdd128                              SEQUENCE (SIZE (1..maxTS-LCR)) OF
                                            TimeslotInfo-LCR-r4
}

-- SPARE: TimeslotISCP, Max = 91
-- Values above Max are spare
TimeslotISCP ::=                    INTEGER (0..127)
```

```
-- TimeslotISCP-List shall not include more than 6 elements in 1.28Mcps TDD mode.
TimeslotISCP-List ::=               SEQUENCE (SIZE (1..maxTS)) OF
                                        TimeslotISCP

TimeslotListWithISCP ::=            SEQUENCE (SIZE (1..maxTS)) OF
                                        TimeslotWithISCP

TimeslotWithISCP ::=                SEQUENCE {
    timeslot                            TimeslotNumber,
    timeslotISCP                        TimeslotISCP
}

TimeToTrigger ::=                   ENUMERATED {
                                        ttt0, ttt10, ttt20, ttt40, ttt60,
                                        ttt80, ttt100, ttt120, ttt160,
                                        ttt200, ttt240, tt320, ttt640,
                                        ttt1280, ttt2560, ttt5000 }

TrafficVolumeEventParam ::=         SEQUENCE {
    eventID                             TrafficVolumeEventType,
    reportingThreshold                  TrafficVolumeThreshold,
    timeToTrigger                       TimeToTrigger                       OPTIONAL,
    pendingTimeAfterTrigger             PendingTimeAfterTrigger             OPTIONAL,
    tx-InterruptionAfterTrigger         TX-InterruptionAfterTrigger         OPTIONAL
}

TrafficVolumeEventResults ::=       SEQUENCE {
    ul-transportChannelCausingEvent     UL-TrCH-Identity,
    trafficVolumeEventIdentity          TrafficVolumeEventType
}

TrafficVolumeEventType ::=          ENUMERATED {
                                        e4a,
                                        e4b }

TrafficVolumeMeasQuantity ::=       CHOICE {
    rlc-BufferPayload                   NULL,
    averageRLC-BufferPayload            TimeInterval,
    varianceOfRLC-BufferPayload         TimeInterval
}

TrafficVolumeMeasSysInfo ::=        SEQUENCE {
    trafficVolumeMeasurementID          MeasurementIdentity         DEFAULT 4,
    trafficVolumeMeasurementObjectList  TrafficVolumeMeasurementObjectList  OPTIONAL,
    trafficVolumeMeasQuantity           TrafficVolumeMeasQuantity           OPTIONAL,
    trafficVolumeReportingQuantity      TrafficVolumeReportingQuantity      OPTIONAL,
    -- dummy is not used in this version of specification, it should
    -- not be sent and if received it should be ignored.
    dummy                               TrafficVolumeReportingCriteria      OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    measurementReportingMode            MeasurementReportingMode,
    reportCriteriaSysInf                TrafficVolumeReportCriteriaSysInfo

}

TrafficVolumeMeasuredResults ::=    SEQUENCE {
    rb-Identity                         RB-Identity,
    rlc-BuffersPayload                  RLC-BuffersPayload                  OPTIONAL,
    averageRLC-BufferPayload            AverageRLC-BufferPayload            OPTIONAL,
    varianceOfRLC-BufferPayload         VarianceOfRLC-BufferPayload         OPTIONAL
}

TrafficVolumeMeasuredResultsList ::= SEQUENCE (SIZE (1..maxRB)) OF
                                        TrafficVolumeMeasuredResults

TrafficVolumeMeasurement ::=        SEQUENCE {
    trafficVolumeMeasurementObjectList  TrafficVolumeMeasurementObjectList  OPTIONAL,
    trafficVolumeMeasQuantity           TrafficVolumeMeasQuantity           OPTIONAL,
    trafficVolumeReportingQuantity      TrafficVolumeReportingQuantity      OPTIONAL,
    measurementValidity                 MeasurementValidity                 OPTIONAL,
    reportCriteria                      TrafficVolumeReportCriteria
}

TrafficVolumeMeasurementObjectList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
                                            UL-TrCH-Identity

TrafficVolumeReportCriteria ::=     CHOICE {
```

```
    trafficVolumeReportingCriteria      TrafficVolumeReportingCriteria,
    periodicalReportingCriteria         PeriodicalReportingCriteria,
    noReporting                         NULL
}

TrafficVolumeReportCriteriaSysInfo ::=  CHOICE {
    trafficVolumeReportingCriteria      TrafficVolumeReportingCriteria,
    periodicalReportingCriteria         PeriodicalReportingCriteria
}

TrafficVolumeReportingCriteria ::= SEQUENCE {
    -- NOTE: transChCriteriaList should be mandatory in later versions of this message
    transChCriteriaList                 TransChCriteriaList                 OPTIONAL
}

TrafficVolumeReportingQuantity ::= SEQUENCE {
    rlc-RB-BufferPayload                BOOLEAN,
    rlc-RB-BufferPayloadAverage         BOOLEAN,
    rlc-RB-BufferPayloadVariance        BOOLEAN
}

TrafficVolumeThreshold ::=          ENUMERATED {
                                        th8, th16, th32, th64, th128,
                                        th256, th512, th1024, th2k, th3k,
                                        th4k, th6k, th8k, th12k, th16k,
                                        th24k, th32k, th48k, th64k, th96k,
                                        th128k, th192k, th256k, th384k,
                                        th512k, th768k }

TransChCriteria ::=                 SEQUENCE {
    ul-transportChannelID               UL-TrCH-Identity                    OPTIONAL,
    eventSpecificParameters             SEQUENCE (SIZE (1..maxMeasParEvent)) OF
                                            TrafficVolumeEventParam         OPTIONAL
}

TransChCriteriaList ::=         SEQUENCE (SIZE (1..maxTrCH)) OF
                                        TransChCriteria

TransferMode ::=                    ENUMERATED {
                                        acknowledgedModeRLC,
                                        unacknowledgedModeRLC }

TransmittedPowerThreshold ::=       INTEGER (-50..33)

TriggeringCondition1 ::=            ENUMERATED {
                                        activeSetCellsOnly,
                                        monitoredSetCellsOnly,
                                        activeSetAndMonitoredSetCells }

TriggeringCondition2 ::=            ENUMERATED {
                                        activeSetCellsOnly,
                                        monitoredSetCellsOnly,
                                        activeSetAndMonitoredSetCells,
                                        detectedSetCellsOnly,
                                        detectedSetAndMonitoredSetCells }

TX-InterruptionAfterTrigger ::=     ENUMERATED {
                                        txiat0-25, txiat0-5, txiat1,
                                        txiat2, txiat4, txiat8, txiat16 }

UDRE ::=                            ENUMERATED {
                                        lessThan1,
                                        between1-and-4,
                                        between4-and-8,
                                        over8 }

UE-6AB-Event ::=                    SEQUENCE {
    timeToTrigger                       TimeToTrigger,
    transmittedPowerThreshold           TransmittedPowerThreshold
}

UE-6FG-Event ::=                    SEQUENCE {
    timeToTrigger                       TimeToTrigger,
    -- in 1.28 Mcps TDD ue-RX-TX-TimeDifferenceThreshold corresponds to T_ADV Threshold
    ue-RX-TX-TimeDifferenceThreshold    UE-RX-TX-TimeDifferenceThreshold
}

-- dummy and dummy2 are not used in this version of the specification, they should
```

```
-- not be sent and if received the UE behaviour is not specified.
UE-AutonomousUpdateMode ::=         CHOICE {
    dummy                               NULL,
    onWithNoReporting                   NULL,
    dummy2                              RL-InformationLists
}

UE-InternalEventParam ::=           CHOICE {
    event6a                             UE-6AB-Event,
    event6b                             UE-6AB-Event,
    event6c                             TimeToTrigger,
    event6d                             TimeToTrigger,
    event6e                             TimeToTrigger,
    event6f                             UE-6FG-Event,
    event6g                             UE-6FG-Event
}

UE-InternalEventParamList ::=       SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        UE-InternalEventParam

UE-InternalEventResults ::=         CHOICE {
    event6a                             NULL,
    event6b                             NULL,
    event6c                             NULL,
    event6d                             NULL,
    event6e                             NULL,
    event6f                             PrimaryCPICH-Info,
    event6g                             PrimaryCPICH-Info,
    spare                               NULL
}

UE-InternalMeasQuantity ::=         SEQUENCE {
    measurementQuantity                 UE-MeasurementQuantity,
    filterCoefficient                   FilterCoefficient                   DEFAULT fc0
}

UE-InternalMeasuredResults ::=      SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            ue-TransmittedPowerFDD              UE-TransmittedPower         OPTIONAL,
            ue-RX-TX-ReportEntryList            UE-RX-TX-ReportEntryList    OPTIONAL
        },
        tdd                                 SEQUENCE {
            ue-TransmittedPowerTDD-List         UE-TransmittedPowerTDD-List OPTIONAL,
            appliedTA                           UL-TimingAdvance            OPTIONAL
        }
    }
}

UE-InternalMeasuredResults-r7 ::=       SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            ue-TransmittedPowerFDD              UE-TransmittedPower         OPTIONAL,
            ue-RX-TX-ReportEntryList            UE-RX-TX-ReportEntryList    OPTIONAL
        },
        tdd                                 SEQUENCE {
            ue-TransmittedPowerTDD-List         UE-TransmittedPowerTDD-List OPTIONAL,
            appliedTA                           EXT-UL-TimingAdvance        OPTIONAL
        }
    }
}

UE-InternalMeasuredResults-LCR-r4 ::=   SEQUENCE {
        ue-TransmittedPowerTDD-List         UE-TransmittedPowerTDD-List     OPTIONAL,
        t-ADVinfo                           T-ADVinfo                       OPTIONAL
}

UE-InternalMeasurement ::=          SEQUENCE {
    ue-InternalMeasQuantity             UE-InternalMeasQuantity             OPTIONAL,
    ue-InternalReportingQuantity        UE-InternalReportingQuantity        OPTIONAL,
    reportCriteria                      UE-InternalReportCriteria
}

UE-InternalMeasurement-r4 ::=       SEQUENCE {
    ue-InternalMeasQuantity             UE-InternalMeasQuantity             OPTIONAL,
    ue-InternalReportingQuantity        UE-InternalReportingQuantity-r4     OPTIONAL,
    reportCriteria                      UE-InternalReportCriteria
}
```

```
UE-InternalMeasurementSysInfo ::=   SEQUENCE {
    ue-InternalMeasurementID            MeasurementIdentity         DEFAULT 5,
    ue-InternalMeasQuantity             UE-InternalMeasQuantity
}

UE-InternalReportCriteria ::=       CHOICE {
    ue-InternalReportingCriteria        UE-InternalReportingCriteria,
    periodicalReportingCriteria         PeriodicalReportingCriteria,
    noReporting                         NULL
}

UE-InternalReportingCriteria ::=    SEQUENCE {
    ue-InternalEventParamList           UE-InternalEventParamList           OPTIONAL
}

UE-InternalReportingQuantity ::=    SEQUENCE {
    ue-TransmittedPower                 BOOLEAN,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            ue-RX-TX-TimeDifference             BOOLEAN
        },
        tdd                                 SEQUENCE {
            appliedTA                           BOOLEAN
        }
    }
}

UE-InternalReportingQuantity-r4 ::= SEQUENCE {
    ue-TransmittedPower                 BOOLEAN,
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            ue-RX-TX-TimeDifference             BOOLEAN
        },
        tdd                                 SEQUENCE {
            tddOption                           CHOICE {
            -- appliedTA applies to both 3.84 Mcps TDD and to 7.68 Mcps TDD.
            -- Therefore, no additional choice of TDD mode is necessary
                tdd384                              SEQUENCE {
                    appliedTA                           BOOLEAN
                },
                tdd128                              SEQUENCE {
                    t-ADVinfo                           BOOLEAN
                }
            }
        }
    }
}

-- TABULAR: UE-MeasurementQuantity, for 3.84 Mcps TDD only the first two values
-- ue-TransmittedPower and utra-Carrier-RSSI are used.
-- For 1.28 Mcps TDD ue-RX-TX-TimeDifference corresponds to T-ADV in the tabular
UE-MeasurementQuantity ::=          ENUMERATED {
                                        ue-TransmittedPower,
                                        utra-Carrier-RSSI,
                                        ue-RX-TX-TimeDifference }

UE-RX-TX-ReportEntry ::=            SEQUENCE {
    primaryCPICH-Info                   PrimaryCPICH-Info,
    ue-RX-TX-TimeDifferenceType1        UE-RX-TX-TimeDifferenceType1
}

UE-RX-TX-ReportEntryList ::=        SEQUENCE (SIZE (1..maxRL)) OF
                                        UE-RX-TX-ReportEntry

-- SPARE: UE-RX-TX-TimeDifferenceType1, Max = 1280
-- Values above Max are spare
UE-RX-TX-TimeDifferenceType1 ::=            INTEGER (768..1791)


UE-RX-TX-TimeDifferenceType2 ::=    INTEGER (0..8191)

UE-RX-TX-TimeDifferenceType2Info ::=    SEQUENCE {
    ue-RX-TX-TimeDifferenceType2            UE-RX-TX-TimeDifferenceType2,
    neighbourQuality                        NeighbourQuality
}

-- In 1.28 Mcps TDD, actual value for
```

```
-- T-ADV Threshold = (UE-RX-TX-TimeDifferenceThreshold - 768) * 0.125
UE-RX-TX-TimeDifferenceThreshold ::= INTEGER (768..1280)

UE-TransmittedPower ::=             INTEGER (0..104)

UE-TransmittedPowerTDD-List ::=     SEQUENCE (SIZE (1..maxTS)) OF
                                        UE-TransmittedPower

UL-TrCH-Identity ::=                    CHOICE{
    dch                                 TransportChannelIdentity,
    -- Note: the reference to CPCH in the element name below is incorrect. The name is not changed
    -- to keep it aligned with R99.
    rachorcpch                          NULL,
    usch                                TransportChannelIdentity
}

UE-Positioning-Accuracy ::=                 BIT STRING (SIZE (7))


UE-Positioning-CipherParameters ::=         SEQUENCE {
    cipheringKeyFlag                    BIT STRING (SIZE (1)),
    cipheringSerialNumber               INTEGER (0..65535)
}

UE-Positioning-Error ::=                        SEQUENCE {
    errorReason                         UE-Positioning-ErrorCause,
    ue-positioning-GPS-additionalAssistanceDataRequest          UE-Positioning-GPS-
AdditionalAssistanceDataRequest OPTIONAL
}

UE-Positioning-ErrorCause ::=                   ENUMERATED {
                                        notEnoughOTDOA-Cells,
                                        notEnoughGPS-Satellites,
                                        assistanceDataMissing,
                                        notAccomplishedGPS-TimingOfCellFrames,
                                        undefinedError,
                                        requestDeniedByUser,
                                        notProcessedAndTimeout,
                                        referenceCellNotServingCell }

UE-Positioning-EventParam ::=               SEQUENCE {
    reportingAmount                     ReportingAmount,
    reportFirstFix                      BOOLEAN,
    measurementInterval                 UE-Positioning-MeasurementInterval,
    eventSpecificInfo                   UE-Positioning-EventSpecificInfo
}

UE-Positioning-EventParamList ::=           SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                        UE-Positioning-EventParam

UE-Positioning-EventSpecificInfo ::=        CHOICE {
    e7a                                 ThresholdPositionChange,
    e7b                                 ThresholdSFN-SFN-Change,
    e7c                                 ThresholdSFN-GPS-TOW
}

UE-Positioning-GPS-AcquisitionAssistance ::=    SEQUENCE {
    gps-ReferenceTime                   INTEGER (0..604799999),
    utran-GPSReferenceTime              UTRAN-GPSReferenceTime          OPTIONAL,
    satelliteInformationList            AcquisitionSatInfoList
}

UE-Positioning-GPS-AdditionalAssistanceDataRequest ::=      SEQUENCE {
    almanacRequest                      BOOLEAN,
    utcModelRequest                     BOOLEAN,
    ionosphericModelRequest             BOOLEAN,
    navigationModelRequest              BOOLEAN,
    dgpsCorrectionsRequest              BOOLEAN,
    referenceLocationRequest            BOOLEAN,
    referenceTimeRequest                BOOLEAN,
    aquisitionAssistanceRequest         BOOLEAN,
    realTimeIntegrityRequest            BOOLEAN,
    navModelAddDataRequest              UE-Positioning-GPS-NavModelAddDataReq       OPTIONAL
}

UE-Positioning-GPS-Almanac ::=              SEQUENCE {
    wn-a                                BIT STRING (SIZE (8)),
    almanacSatInfoList                  AlmanacSatInfoList,
```

```
    sv-GlobalHealth                     BIT STRING (SIZE (364))             OPTIONAL
}

UE-Positioning-GPS-AssistanceData ::=           SEQUENCE {
    ue-positioning-GPS-ReferenceTime                UE-Positioning-GPS-ReferenceTime
    OPTIONAL,
    ue-positioning-GPS-ReferenceLocation            ReferenceLocation               OPTIONAL,
    ue-positioning-GPS-DGPS-Corrections             UE-Positioning-GPS-DGPS-Corrections
    OPTIONAL,
    ue-positioning-GPS-NavigationModel              UE-Positioning-GPS-NavigationModel
    OPTIONAL,
    ue-positioning-GPS-IonosphericModel             UE-Positioning-GPS-IonosphericModel
    OPTIONAL,
    ue-positioning-GPS-UTC-Model                    UE-Positioning-GPS-UTC-Model
    OPTIONAL,
    ue-positioning-GPS-Almanac                      UE-Positioning-GPS-Almanac
    OPTIONAL,
    ue-positioning-GPS-AcquisitionAssistance        UE-Positioning-GPS-AcquisitionAssistance
    OPTIONAL,
    ue-positioning-GPS-Real-timeIntegrity           BadSatList                              OPTIONAL,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy           UE-Positioning-GPS-ReferenceCellInfo        OPTIONAL
}

UE-Positioning-GPS-DGPS-Corrections ::=     SEQUENCE {
    gps-TOW                             INTEGER (0..604799),
    statusHealth                        DiffCorrectionStatus,
    dgps-CorrectionSatInfoList          DGPS-CorrectionSatInfoList
}

UE-Positioning-GPS-IonosphericModel ::=     SEQUENCE {
    alfa0                               BIT STRING (SIZE (8)),
    alfa1                               BIT STRING (SIZE (8)),
    alfa2                               BIT STRING (SIZE (8)),
    alfa3                               BIT STRING (SIZE (8)),
    beta0                               BIT STRING (SIZE (8)),
    beta1                               BIT STRING (SIZE (8)),
    beta2                               BIT STRING (SIZE (8)),
    beta3                               BIT STRING (SIZE (8))
}

UE-Positioning-GPS-MeasurementResults ::=       SEQUENCE {
    referenceTime                       CHOICE {
        utran-GPSReferenceTimeResult        UTRAN-GPSReferenceTimeResult,
        gps-ReferenceTimeOnly               INTEGER (0..604799999)
    },
    gps-MeasurementParamList            GPS-MeasurementParamList
}

UE-Positioning-GPS-NavigationModel ::=          SEQUENCE {
    navigationModelSatInfoList          NavigationModelSatInfoList
}

UE-Positioning-GPS-NavModelAddDataReq ::=       SEQUENCE {
    gps-Week                            INTEGER (0..1023),
    -- SPARE: gps-Toe, Max = 167
    -- Values above Max are spare
    gps-Toe                             INTEGER (0..255),
    -- SPARE: tToeLimit, Max = 10
    -- Values above Max are spare
    tToeLimit                           INTEGER (0..15),
    satDataList                         SatDataList
}

UE-Positioning-GPS-ReferenceCellInfo ::=        SEQUENCE{
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            referenceIdentity               PrimaryCPICH-Info
        },
        tdd                             SEQUENCE {
            referenceIdentity               CellParametersID
        }
    }
}

UE-Positioning-GPS-ReferenceTime ::=            SEQUENCE {
    gps-Week                            INTEGER (0..1023),
```

```
    gps-tow-1msec                       GPS-TOW-1msec,  utran-GPSReferenceTime              UTRAN-
GPSReferenceTime                OPTIONAL,
    sfn-tow-Uncertainty                 SFN-TOW-Uncertainty                 OPTIONAL,
    utran-GPS-DriftRate                 UTRAN-GPS-DriftRate                 OPTIONAL,
    gps-TOW-AssistList                  GPS-TOW-AssistList                  OPTIONAL
}

UE-Positioning-GPS-UTC-Model ::=                SEQUENCE {
    a1                                  BIT STRING (SIZE (24)),
    a0                                  BIT STRING (SIZE (32)),
    t-ot                                BIT STRING (SIZE (8)),
    wn-t                                BIT STRING (SIZE (8)),
    delta-t-LS                          BIT STRING (SIZE (8)),
    wn-lsf                              BIT STRING (SIZE (8)),
    dn                                  BIT STRING (SIZE (8)),
    delta-t-LSF                         BIT STRING (SIZE (8))
}

UE-Positioning-IPDL-Parameters ::=              SEQUENCE {
    ip-Spacing                          IP-Spacing,
    ip-Length                           IP-Length,
    ip-Offset                           INTEGER (0..9),
    seed                                INTEGER (0..63),
    burstModeParameters                 BurstModeParameters         OPTIONAL
}

UE-Positioning-IPDL-Parameters-r4 ::=           SEQUENCE {
    modeSpecificInfo                    CHOICE {
        fdd                                 SEQUENCE {
            ip-Spacing                          IP-Spacing,
            ip-Length                           IP-Length,
            ip-Offset                           INTEGER (0..9),
            seed                                INTEGER (0..63)
        },
        tdd                                 SEQUENCE {
            ip-Spacing-TDD                      IP-Spacing-TDD,
            ip-slot                             INTEGER (0..14),
            ip-Start                            INTEGER (0..4095),
            ip-PCCPCG                           IP-PCCPCH-r4            OPTIONAL
        }
    },
    burstModeParameters                 BurstModeParameters             OPTIONAL
}

UE-Positioning-IPDL-Parameters-TDD-r4-ext ::=   SEQUENCE {
    ip-Spacing                          IP-Spacing-TDD,
    ip-slot                             INTEGER (0..14),
    ip-Start                            INTEGER (0..4095),
    ip-PCCPCG                           IP-PCCPCH-r4                    OPTIONAL,
    burstModeParameters                 BurstModeParameters
}

UE-Positioning-MeasuredResults ::=              SEQUENCE {
    ue-positioning-OTDOA-Measurement                UE-Positioning-OTDOA-Measurement
    OPTIONAL,
    ue-positioning-PositionEstimateInfo             UE-Positioning-PositionEstimateInfo
        OPTIONAL,
    ue-positioning-GPS-Measurement                  UE-Positioning-GPS-MeasurementResults
        OPTIONAL,
    ue-positioning-Error                            UE-Positioning-Error
    OPTIONAL
}

UE-Positioning-MeasuredResults-v390ext ::=      SEQUENCE {
    ue-Positioning-OTDOA-Measurement-v390ext        UE-Positioning-OTDOA-Measurement-v390ext
}

UE-Positioning-Measurement ::=                  SEQUENCE {
    ue-positioning-ReportingQuantity                UE-Positioning-ReportingQuantity,
    reportCriteria                      UE-Positioning-ReportCriteria,
    ue-positioning-OTDOA-AssistanceData         UE-Positioning-OTDOA-AssistanceData
    OPTIONAL,
    ue-positioning-GPS-AssistanceData               UE-Positioning-GPS-AssistanceData
    OPTIONAL
}

UE-Positioning-Measurement-v390ext ::=          SEQUENCE {
```

```
    ue-positioning-ReportingQuantity-v390ext        UE-Positioning-ReportingQuantity-v390ext
    OPTIONAL,
    measurementValidity                MeasurementValidity                OPTIONAL,
    ue-positioning-OTDOA-AssistanceData-UEB         UE-Positioning-OTDOA-AssistanceData-UEB
    OPTIONAL
}

UE-Positioning-Measurement-r4 ::=               SEQUENCE {
    ue-positioning-ReportingQuantity                UE-Positioning-ReportingQuantity-r4,
    measurementValidity                             MeasurementValidity
    OPTIONAL,
    reportCriteria                                  UE-Positioning-ReportCriteria,
    ue-positioning-OTDOA-AssistanceData             UE-Positioning-OTDOA-AssistanceData-r4
    OPTIONAL,
    ue-positioning-GPS-AssistanceData               UE-Positioning-GPS-AssistanceData
    OPTIONAL
}

UE-Positioning-Measurement-v7xyext ::=          SEQUENCE {
    ue-positioning-ReportingQuantity                UE-Positioning-ReportingQuantity-v7xyext
}

UE-Positioning-MeasurementEventResults ::=      CHOICE {
    event7a                                 UE-Positioning-PositionEstimateInfo,
    event7b                                 UE-Positioning-OTDOA-Measurement,
    event7c                                 UE-Positioning-GPS-MeasurementResults,
    spare                                   NULL
}

UE-Positioning-MeasurementInterval ::=          ENUMERATED {
                                        e5, e15, e60, e300,
                                        e900, e1800, e3600, e7200 }

UE-Positioning-MethodType ::=                   ENUMERATED {
                                        ue-Assisted,
                                        ue-Based,
                                        ue-BasedPreferred,
                                        ue-AssistedPreferred }

UE-Positioning-OTDOA-AssistanceData ::=     SEQUENCE {
    ue-positioning-OTDOA-ReferenceCellInfo          UE-Positioning-OTDOA-ReferenceCellInfo
    OPTIONAL,
    ue-positioning-OTDOA-NeighbourCellList              UE-Positioning-OTDOA-NeighbourCellList
        OPTIONAL
}

UE-Positioning-OTDOA-AssistanceData-r4 ::=  SEQUENCE {
    ue-positioning-OTDOA-ReferenceCellInfo          UE-Positioning-OTDOA-ReferenceCellInfo-r4
        OPTIONAL,
    ue-positioning-OTDOA-NeighbourCellList          UE-Positioning-OTDOA-NeighbourCellList-r4
        OPTIONAL
}

UE-Positioning-OTDOA-AssistanceData-r4ext ::= SEQUENCE {
    -- In case of TDD these IPDL parameters shall be used for the reference cell instead of
    -- IPDL Parameters in IE UE-Positioning-OTDOA-ReferenceCellInfo
    ue-Positioning-IPDL-Parameters-TDD-r4-ext        UE-Positioning-IPDL-Parameters-TDD-r4-ext
    OPTIONAL,
    -- These IPDL parameters shall be used for the neighbour cells in case of TDD instead of
    -- IPDL Parameters in IE UE-Positioning-OTDOA-NeighbourCellInfoList. The cells shall be
    -- listed in the same order as in IE UE-Positioning-OTDOA-NeighbourCellInfoList
    ue-Positioning-IPDL-Parameters-TDDList-r4-ext   UE-Positioning-IPDL-Parameters-TDDList-r4-ext
    OPTIONAL
}

UE-Positioning-OTDOA-AssistanceData-UEB ::=     SEQUENCE {
    ue-positioning-OTDOA-ReferenceCellInfo-UEB
                                        UE-Positioning-OTDOA-ReferenceCellInfo-UEB      OPTIONAL,
    ue-positioning-OTDOA-NeighbourCellList-UEB
                                        UE-Positioning-OTDOA-NeighbourCellList-UEB      OPTIONAL
}

UE-Positioning-OTDOA-AssistanceData-UEB-ext ::= SEQUENCE {
    ue-positioning-OTDOA-ReferenceCellInfo-UEB-ext
                                        UE-Positioning-OTDOA-ReferenceCellInfo-UEB-ext  OPTIONAL,
    ue-positioning-OTDOA-NeighbourCellList-UEB-ext
                                        UE-Positioning-OTDOA-NeighbourCellList-UEB-ext  OPTIONAL
}
```

```
UE-Positioning-IPDL-Parameters-TDDList-r4-ext ::=   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        UE-Positioning-IPDL-Parameters-TDD-r4-ext

UE-Positioning-OTDOA-Measurement ::=            SEQUENCE {
    sfn                                 INTEGER (0..4095),
    modeSpecificInfo                CHOICE {
        fdd                                 SEQUENCE {
            referenceCellIDentity               PrimaryCPICH-Info,
            ue-RX-TX-TimeDifferenceType2Info    UE-RX-TX-TimeDifferenceType2Info
        },
        tdd                                 SEQUENCE {
            referenceCellIdentity           CellParametersID
        }
    },
    neighbourList                       NeighbourList                       OPTIONAL
}

UE-Positioning-OTDOA-Measurement-v390ext ::=            SEQUENCE {
    neighbourList-v390ext                       NeighbourList-v390ext
}

UE-Positioning-OTDOA-NeighbourCellInfo ::= SEQUENCE {
    modeSpecificInfo    CHOICE  {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info
        },
        tdd                                 SEQUENCE{
            cellAndChannelIdentity              CellAndChannelIdentity
        }
    },
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    ue-positioning-IPDL-Paremeters                  UE-Positioning-IPDL-Parameters
    OPTIONAL,
    sfn-SFN-RelTimeDifference           SFN-SFN-RelTimeDifference1,
    sfn-SFN-Drift                       SFN-SFN-Drift                       OPTIONAL,
    searchWindowSize                    OTDOA-SearchWindowSize,
    positioningMode     CHOICE{
        ueBased                             SEQUENCE {},
        ueAssisted                          SEQUENCE {}
    }
}

UE-Positioning-OTDOA-NeighbourCellInfo-r4 ::= SEQUENCE {
    modeSpecificInfo    CHOICE  {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info
        },
        tdd                                 SEQUENCE{
            cellAndChannelIdentity              CellAndChannelIdentity
        }
    },
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    ue-positioning-IPDL-Paremeters      UE-Positioning-IPDL-Parameters-r4   OPTIONAL,
    sfn-SFN-RelTimeDifference           SFN-SFN-RelTimeDifference1,
    sfn-Offset-Validity                 SFN-Offset-Validity                 OPTIONAL,
    sfn-SFN-Drift                       SFN-SFN-Drift                       OPTIONAL,
    searchWindowSize                    OTDOA-SearchWindowSize,
    positioningMode     CHOICE {
        ueBased                             SEQUENCE {
            relativeNorth                       INTEGER (-20000..20000)             OPTIONAL,
            relativeEast                        INTEGER (-20000..20000)             OPTIONAL,
            relativeAltitude                    INTEGER (-4000..4000)               OPTIONAL,
            fineSFN-SFN                         FineSFN-SFN                         OPTIONAL,
            -- actual value roundTripTime = (IE value * 0.0625) + 876
            roundTripTime                       INTEGER (0.. 32766)                 OPTIONAL
        },
        ueAssisted                          SEQUENCE {}
    }
}

UE-Positioning-OTDOA-NeighbourCellInfo-UEB ::= SEQUENCE {
    modeSpecificInfo    CHOICE  {
        fdd                                 SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info
        },
        tdd                                 SEQUENCE{
            cellAndChannelIdentity              CellAndChannelIdentity
```

```
        }
    },
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    ue-positioning-IPDL-Paremeters      UE-Positioning-IPDL-Parameters      OPTIONAL,
    sfn-SFN-RelTimeDifference           SFN-SFN-RelTimeDifference1,
    sfn-SFN-Drift                       SFN-SFN-Drift                       OPTIONAL,
    searchWindowSize                    OTDOA-SearchWindowSize,
    relativeNorth                       INTEGER (-20000..20000)             OPTIONAL,
    relativeEast                        INTEGER (-20000..20000)             OPTIONAL,
    relativeAltitude                    INTEGER (-4000..4000)               OPTIONAL,
    fineSFN-SFN                         FineSFN-SFN,
    -- actual value roundTripTime = (IE value * 0.0625) + 876
    roundTripTime                       INTEGER (0..32766)                  OPTIONAL
}

UE-Positioning-OTDOA-NeighbourCellInfo-UEB-ext ::= SEQUENCE {
    -- actual value roundTripTimeExtension = (IE value * 0.0625)
    roundTripTimeExtension              INTEGER (0..70274)                  OPTIONAL
}

UE-Positioning-OTDOA-NeighbourCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                           UE-Positioning-OTDOA-NeighbourCellInfo

UE-Positioning-OTDOA-NeighbourCellList-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                UE-Positioning-OTDOA-NeighbourCellInfo-r4

UE-Positioning-OTDOA-NeighbourCellList-UEB ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                           UE-Positioning-OTDOA-NeighbourCellInfo-UEB

-- The order of the list corresponds to the order of UE-Positioning-OTDOA-NeighbourCellInfo-UEB
-- in UE-Positioning-OTDOA-NeighbourCellList-UEB
UE-Positioning-OTDOA-NeighbourCellList-UEB-ext ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                    UE-Positioning-OTDOA-NeighbourCellInfo-UEB-ext


UE-Positioning-OTDOA-Quality ::=            SEQUENCE {
    stdResolution                       BIT STRING (SIZE (2)),
    numberOfOTDOA-Measurements          BIT STRING (SIZE (3)),
    stdOfOTDOA-Measurements             BIT STRING (SIZE (5))
}

UE-Positioning-OTDOA-ReferenceCellInfo ::=          SEQUENCE {
    sfn                                 INTEGER (0..4095)
    OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd                                     SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info
        },
        tdd                                     SEQUENCE{
            cellAndChannelIdentity              CellAndChannelIdentity
        }
    },
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    positioningMode CHOICE {
        ueBased                                 SEQUENCE {},
        ueAssisted                              SEQUENCE {}
    },
    ue-positioning-IPDL-Paremeters              UE-Positioning-IPDL-Parameters  OPTIONAL
}

UE-Positioning-OTDOA-ReferenceCellInfo-r4 ::=   SEQUENCE {
    sfn                                 INTEGER (0..4095)
    OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd                                     SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info
        },
        tdd                                     SEQUENCE{
            cellAndChannelIdentity              CellAndChannelIdentity
        }
    },
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    positioningMode CHOICE {
        ueBased                                 SEQUENCE {
            cellPosition                                ReferenceCellPosition   OPTIONAL,
            -- actual value roundTripTime = (IE value * 0.0625) + 876
            roundTripTime                       INTEGER (0..32766)              OPTIONAL
        },
```

```
        ueAssisted                              SEQUENCE {}
    },
    ue-positioning-IPDL-Paremeters              UE-Positioning-IPDL-Parameters-r4   OPTIONAL
}

UE-Positioning-OTDOA-ReferenceCellInfo-UEB ::=          SEQUENCE {
    sfn                                 INTEGER (0..4095)                   OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd                                     SEQUENCE {
            primaryCPICH-Info                   PrimaryCPICH-Info
        },
        tdd                                     SEQUENCE{
            cellAndChannelIdentity              CellAndChannelIdentity
        }
    },
    frequencyInfo                       FrequencyInfo                       OPTIONAL,
    cellPosition                        ReferenceCellPosition               OPTIONAL,
    -- actual value roundTripTime = (IE value * 0.0625) + 876
    roundTripTime                       INTEGER (0..32766)                  OPTIONAL,
    ue-positioning-IPDL-Paremeters      UE-Positioning-IPDL-Parameters      OPTIONAL
}

UE-Positioning-OTDOA-ReferenceCellInfo-UEB-ext ::= SEQUENCE {
    -- actual value roundTripTimeExtension = (IE value * 0.0625)
    roundTripTimeExtension              INTEGER (0..70274)                  OPTIONAL
}

UE-Positioning-PositionEstimateInfo ::=                 SEQUENCE {
    referenceTime                   CHOICE {
        utran-GPSReferenceTimeResult        UTRAN-GPSReferenceTimeResult,
        gps-ReferenceTimeOnly               INTEGER (0..604799999),
        cell-Timing                         SEQUENCE {
            sfn                                     INTEGER (0..4095),
            modeSpecificInfo                CHOICE {
                fdd                                     SEQUENCE {
                    primaryCPICH-Info                       PrimaryCPICH-Info
                },
                tdd                                     SEQUENCE{
                    cellAndChannelIdentity                  CellAndChannelIdentity
                }
            }
        }
    },
    positionEstimate                    PositionEstimate
}

UE-Positioning-ReportCriteria ::=               CHOICE {
    ue-positioning-ReportingCriteria                UE-Positioning-EventParamList,
    periodicalReportingCriteria         PeriodicalReportingCriteria,
    noReporting                         NULL
}

UE-Positioning-ReportingQuantity ::=            SEQUENCE {
    methodType                          UE-Positioning-MethodType,
    positioningMethod                   PositioningMethod,
    -- dummy1 is not used in this version of specification and it should
    -- be ignored.
    dummy1                              UE-Positioning-ResponseTime,
    horizontal-Accuracy                 UE-Positioning-Accuracy             OPTIONAL,
    gps-TimingOfCellWanted              BOOLEAN,
    -- dummy2 is not used in this version of specification and it should
    -- be ignored.
    dummy2                              BOOLEAN,
    additionalAssistanceDataRequest     BOOLEAN,
    environmentCharacterisation         EnvironmentCharacterisation         OPTIONAL
}

UE-Positioning-ReportingQuantity-v390ext ::=        SEQUENCE {
    vertical-Accuracy                           UE-Positioning-Accuracy
}

UE-Positioning-ReportingQuantity-r4 ::=         SEQUENCE {
    methodType                          UE-Positioning-MethodType,
    positioningMethod                   PositioningMethod,
    horizontalAccuracy                  UE-Positioning-Accuracy             OPTIONAL,
    verticalAccuracy                    UE-Positioning-Accuracy             OPTIONAL,
    gps-TimingOfCellWanted              BOOLEAN,
    additionalAssistanceDataReq         BOOLEAN,
```

```
    environmentCharacterisation         EnvironmentCharacterisation         OPTIONAL
}

UE-Positioning-ReportingQuantity-v7xyext ::=    SEQUENCE {
    velocityRequested                   ENUMERATED { true }                 OPTIONAL
}

UE-Positioning-ResponseTime ::=             ENUMERATED {
                                        s1, s2, s4, s8, s16,
                                        s32, s64, s128 }

-- SPARE: UTRA-CarrierRSSI, Max = 76
-- Values above Max are spare
UTRA-CarrierRSSI ::=                INTEGER (0..127)

UTRAN-GPS-DriftRate ::=             ENUMERATED {
                                    utran-GPSDrift0, utran-GPSDrift1, utran-GPSDrift2,
                                    utran-GPSDrift5, utran-GPSDrift10, utran-GPSDrift15,
                                    utran-GPSDrift25, utran-GPSDrift50, utran-GPSDrift-1,
                                    utran-GPSDrift-2, utran-GPSDrift-5, utran-GPSDrift-10,
                                    utran-GPSDrift-15, utran-GPSDrift-25, utran-GPSDrift-50}

UTRAN-GPSReferenceTime ::=              SEQUENCE {
    -- For utran-GPSTimingOfCell values above 2322431999999 are not
    -- used in this version of the specification
    -- Actual value utran-GPSTimingOfCell = (ms-part * 4294967296) + ls-part
    utran-GPSTimingOfCell           SEQUENCE {
        ms-part                         INTEGER (0..1023),
        ls-part                         INTEGER (0..4294967295)
    },
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            referenceIdentity               PrimaryCPICH-Info
        },
        tdd                             SEQUENCE {
            referenceIdentity               CellParametersID
        }
    }               OPTIONAL,
    sfn                                 INTEGER (0..4095)
}

UTRAN-GPSReferenceTimeResult ::=                SEQUENCE {
    -- For ue-GPSTimingOfCell values above 37158911999999 are not
    -- used in this version of the specification
    -- Actual value ue-GPSTimingOfCell = (ms-part * 4294967296) + ls-part
    ue-GPSTimingOfCell          SEQUENCE {
        ms-part                         INTEGER (0.. 16383),
        ls-part                         INTEGER (0..4294967295)
    },
    modeSpecificInfo                CHOICE {
        fdd                             SEQUENCE {
            referenceIdentity               PrimaryCPICH-Info
        },
        tdd                             SEQUENCE {
            referenceIdentity               CellParametersID
        }
    },
    sfn                                 INTEGER (0..4095)
}

VarianceOfRLC-BufferPayload ::=     ENUMERATED {
                                        plv0, plv4, plv8, plv16, plv32, plv64,
                                        plv128, plv256, plv512, plv1024,
                                        plv2k, plv4k, plv8k, plv16k, spare2, spare1 }

VelocityEstimate    ::=             CHOICE {
    horizontalVelocity                              HorizontalVelocity,
    horizontalWithVerticalVelocity                  HorizontalWithVerticalVelocity,
    horizontalVelocityWithUncertainty               HorizontalVelocityWithUncertainty,
    horizontalWithVerticalVelocityAndUncertainty    HorizontalWithVerticalVelocityAndUncertainty
}

-- Actual value W = IE value * 0.1
W ::=                               INTEGER (0..20)

-- ************************************************
--
--     OTHER INFORMATION ELEMENTS (10.3.8)
```

```
--
-- **************************************************

BCC ::=                             INTEGER (0..7)

BCCH-ModificationInfo ::=           SEQUENCE {
    mib-ValueTag                        MIB-ValueTag,
    bcch-ModificationTime               BCCH-ModificationTime               OPTIONAL
}

-- Actual value BCCH-ModificationTime = IE value * 8
BCCH-ModificationTime ::=           INTEGER (0..511)

BSIC ::=                            SEQUENCE {
    ncc                                 NCC,
    bcc                                 BCC
}

CBS-DRX-Level1Information ::=       SEQUENCE {
    ctch-AllocationPeriod               INTEGER (1..256),
    cbs-FrameOffset                     INTEGER (0..255)
}

CBS-DRX-Level1Information-extension-r6 ::=  ENUMERATED {p8, p16, p32, p64, p128, p256}

CDMA2000-Message ::=                SEQUENCE {
    msg-Type                            BIT STRING (SIZE (8)),
    payload                             BIT STRING (SIZE (1..512))
}

CDMA2000-MessageList ::=                SEQUENCE (SIZE (1..maxInterSysMessages)) OF
                                            CDMA2000-Message

CDMA2000-UMTS-Frequency-List ::=        SEQUENCE (SIZE (1..maxNumCDMA2000Freqs)) OF
                                            FrequencyInfoCDMA2000

CellValueTag ::=                        INTEGER (1..4)

--Actual value = 2^(IE value)
ExpirationTimeFactor ::=                INTEGER (1..8)

-- For each extended SIB type the value tag information is added at the end
ExtSIBTypeInfoSchedulingInfo-List ::=   SEQUENCE (SIZE (1..maxSIB)) OF
                                            ExtSIBTypeInfoSchedulingInfo

ExtSIBTypeInfoSchedulingInfo ::=    SEQUENCE {
    extensionSIB-Type                   SIB-TypeExt,
    schedulingInfo                      SchedulingInformation,
    valueTagInfo                        ValueTagInfo
}

FDD-UMTS-Frequency-List ::=             SEQUENCE (SIZE (1..maxNumFDDFreqs)) OF
                                            FrequencyInfoFDD

FrequencyInfoCDMA2000 ::=               SEQUENCE {
                                            band-Class      BIT STRING (SIZE (5)),
                                            cdma-Freq       BIT STRING (SIZE(11))
}

GERAN-SystemInfoBlock ::=               OCTET STRING (SIZE (1..23))

GERAN-SystemInformation ::=             SEQUENCE (SIZE (1..maxGERAN-SI)) OF GERAN-SystemInfoBlock

GSM-BA-Range ::=                        SEQUENCE {
                                            gsmLowRangeUARFCN       UARFCN,
                                            gsmUpRangeUARFCN        UARFCN
}

GSM-BA-Range-List ::=                   SEQUENCE (SIZE (1..maxNumGSMFreqRanges)) OF
                                            GSM-BA-Range


-- This IE is formatted as 'TLV' and is coded in the same way as the Mobile Station Classmark 2
-- information element in [5]. The first octet is the Mobile station classmark 2 IEI and its value
-- shall be set to 33H. The second octet is the Length of mobile station classmark 2 and its value
-- shall be set to 3. The octet 3 contains the first octet of the value part of the Mobile Station
-- Classmark 2 information element, the octet 4 contains the second octet of the value part of the
-- Mobile Station Classmark 2 information element and so on. For each of these octets, the first/
```

```
-- leftmost/ most significant bit of the octet contains b8 of the corresponding octet of the Mobile
-- Station Classmark 2.
GSM-Classmark2 ::=                  OCTET STRING (SIZE (5))

-- This IE is formatted as 'V' and is coded in the same way as the value part in the Mobile station
-- classmark 3 information element in [5]
-- The value part is specified by means of CSN.1, which encoding results in a bit string, to which
-- final padding may be appended upto the next octet boundary [5]. The first/ leftmost bit of the
-- CSN.1 bit string is placed in the first/ leftmost/ most significant bit of the first
-- octet. This continues until the last bit of the CSN.1 bit string, which is placed in the last/
-- rightmost/ least significant bit of the last octet.
GSM-Classmark3 ::=                  OCTET STRING (SIZE (1..32))

GSM-MessageList ::=                 SEQUENCE (SIZE (1..maxInterSysMessages)) OF
                                        BIT STRING (SIZE (1..512))

GSM-MS-RadioAccessCapability ::=    OCTET STRING (SIZE (1..64))

GsmSecurityCapability ::=           BIT STRING {
                                        -- For each bit value "0" means false/ not supported
                                        a5-7(0),
                                        a5-6(1),
                                        a5-5(2),
                                        a5-4(3),
                                        a5-3(4),
                                        a5-2(5),
                                        a5-1(6)
                                        }   (SIZE (7))

GSM-TargetCellInfoList ::=      SEQUENCE (SIZE (1..maxGSMTargetCells)) OF
                                            GSM-TargetCellInfo


GSM-TargetCellInfo ::=              SEQUENCE {
    bcch-ARFCN                          BCCH-ARFCN,
    frequency-band                      Frequency-Band,
    bsic                                BSIC            OPTIONAL
}

IdentificationOfReceivedMessage ::= SEQUENCE {
        rrc-TransactionIdentifier       RRC-TransactionIdentifier,
        receivedMessageType             ReceivedMessageType
}

InterRAT-ChangeFailureCause ::=     CHOICE {
    configurationUnacceptable           NULL,
    physicalChannelFailure              NULL,
    protocolError                       ProtocolErrorInformation,
    unspecified                         NULL,
    spare4                              NULL,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}

GERANIu-MessageList ::=             SEQUENCE (SIZE (1..maxInterSysMessages)) OF
                                        BIT STRING (SIZE (1..32768))

GERANIu-RadioAccessCapability ::=   BIT STRING (SIZE (1..170))

InterRAT-UE-RadioAccessCapability ::= CHOICE {
    gsm                                 SEQUENCE {
        gsm-Classmark2                      GSM-Classmark2,
        gsm-Classmark3                      GSM-Classmark3
    },
    cdma2000                            SEQUENCE {
        cdma2000-MessageList                CDMA2000-MessageList
    }
}

InterRAT-UE-RadioAccessCapabilityList ::=   SEQUENCE (SIZE(1..maxInterSysMessages)) OF
                                            InterRAT-UE-RadioAccessCapability

InterRAT-UE-RadioAccessCapability-v590ext ::= SEQUENCE {
    geranIu-RadioAccessCapability       GERANIu-RadioAccessCapability
}

InterRAT-UE-RadioAccessCapability-v690ext ::= SEQUENCE {
```

```
    supportOfInter-RAT-PS-Handover      ENUMERATED { doesSupporInter-RAT-PS-Handover }  OPTIONAL,
    gsm-MS-RadioAccessCapability        GSM-MS-RadioAccessCapability
}

InterRAT-UE-SecurityCapability ::= CHOICE {
    gsm                                 SEQUENCE {
        gsmSecurityCapability           GsmSecurityCapability
    }
}

InterRAT-UE-SecurityCapList ::=     SEQUENCE (SIZE(1..maxInterSysMessages)) OF
                                        InterRAT-UE-SecurityCapability

InterRAT-HO-FailureCause ::=        CHOICE {
    configurationUnacceptable           NULL,
    physicalChannelFailure              NULL,
    protocolError                       ProtocolErrorInformation,
    interRAT-ProtocolError              NULL,
    unspecified                         NULL,
    spare11                             NULL,
    spare10                             NULL,
    spare9                              NULL,
    spare8                              NULL,
    spare7                              NULL,
    spare6                              NULL,
    spare5                              NULL,
    spare4                              NULL,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}

MasterInformationBlock ::=          SEQUENCE {
        mib-ValueTag                    MIB-ValueTag,
        -- TABULAR: The PLMN identity and ANSI-41 core network information
        -- are included in PLMN-Type.
        plmn-Type                       PLMN-Type,
        sibSb-ReferenceList             SIBSb-ReferenceList,
    -- Extension mechanism for non- release99 information
        v690NonCriticalExtensions           SEQUENCE {
            masterInformationBlock-v690ext      MasterInformationBlock-v690ext,
            v6b0NonCriticalExtensions           SEQUENCE {
                masterInformationBlock-v6b0ext      MasterInformationBlock-v6b0ext-IEs,
                nonCriticalExtensions               SEQUENCE {}                         OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

MasterInformationBlock-v690ext ::=  SEQUENCE {
    multiplePLMN-List                   MultiplePLMN-List-r6            OPTIONAL
}

MasterInformationBlock-v6b0ext-IEs ::= SEQUENCE {
    extSIBTypeInfoSchedulingInfo-List   ExtSIBTypeInfoSchedulingInfo-List   OPTIONAL
}

MIB-ValueTag ::=                    INTEGER (1..8)

NCC ::=                             INTEGER (0..7)

PLMN-ValueTag ::=                   INTEGER (1..256)


PredefinedConfigIdentityAndValueTag ::= SEQUENCE {
    predefinedConfigIdentity                PredefinedConfigIdentity,
    predefinedConfigValueTag                PredefinedConfigValueTag
}

ProtocolErrorInformation ::=        SEQUENCE {
    diagnosticsType                     CHOICE {
        type1                               SEQUENCE {
            protocolErrorCause                  ProtocolErrorCause
        },
        spare                               NULL
    }
}

ReceivedMessageType ::=             ENUMERATED {
```

```
                                    activeSetUpdate,
                                    cellChangeOrderFromUTRAN,
                                    cellUpdateConfirm,
                                    counterCheck,
                                    downlinkDirectTransfer,
                                    interRATHandoverCommand,
                                    measurementControl,
                                    pagingType2,
                                    physicalChannelReconfiguration,
                                    physicalSharedChannelAllocation,
                                    radioBearerReconfiguration,
                                    radioBearerRelease,
                                    radioBearerSetup,
                                    rrcConnectionRelease,
                                    rrcConnectionReject,
                                    rrcConnectionSetup,
                                    securityModeCommand,
                                    signallingConnectionRelease,
                                    transportChannelReconfiguration,
                                    transportFormatCombinationControl,
                                    ueCapabilityEnquiry,
                                    ueCapabilityInformationConfirm,
                                    uplinkPhysicalChannelControl,
                                    uraUpdateConfirm,
                                    utranMobilityInformation,
                                    assistanceDataDelivery,
                                    spare6, spare5, spare4, spare3, spare2,
                                    spare1
}

Rplmn-Information ::=               SEQUENCE {
                                        gsm-BA-Range-List       GSM-BA-Range-List   OPTIONAL,
                                        fdd-UMTS-Frequency-List FDD-UMTS-Frequency-List
    OPTIONAL,
                                        tdd-UMTS-Frequency-List TDD-UMTS-Frequency-List
    OPTIONAL,
                                        cdma2000-UMTS-Frequency-List    CDMA2000-UMTS-Frequency-
List    OPTIONAL
}

Rplmn-Information-r4 ::=        SEQUENCE {
    gsm-BA-Range-List               GSM-BA-Range-List                       OPTIONAL,
    fdd-UMTS-Frequency-List         FDD-UMTS-Frequency-List                 OPTIONAL,
    -- the option is the same for 7.68 Mcps TDD as for 3.84 Mcps TDD
    -- i.e. TDD-UMTS-Frequency-List applies
    tdd384-UMTS-Frequency-List      TDD-UMTS-Frequency-List                 OPTIONAL,
    tdd128-UMTS-Frequency-List      TDD-UMTS-Frequency-List                 OPTIONAL,
    cdma2000-UMTS-Frequency-List    CDMA2000-UMTS-Frequency-List            OPTIONAL
}

SchedulingInformation ::=           SEQUENCE {
    scheduling                          SEQUENCE {
        segCount                            SegCount                         DEFAULT 1,
        sib-Pos                             CHOICE {
            -- The element name indicates the repetition period and the value
            -- (multiplied by two) indicates the position of the first segment.
            rep4                                INTEGER (0..1),
            rep8                                INTEGER (0..3),
            rep16                               INTEGER (0..7),
            rep32                               INTEGER (0..15),
            rep64                               INTEGER (0..31),
            rep128                              INTEGER (0..63),
            rep256                              INTEGER (0..127),
            rep512                              INTEGER (0..255),
            rep1024                             INTEGER (0..511),
            rep2048                             INTEGER (0..1023),
            rep4096                             INTEGER (0..2047)
        },
        sib-PosOffsetInfo                   SibOFF-List                     OPTIONAL
    }
}

SchedulingInformationSIB ::=        SEQUENCE {
    sib-Type                        SIB-TypeAndTag,
    scheduling                      SchedulingInformation
}

SchedulingInformationSIBSb ::=      SEQUENCE {
```

```
    sibSb-Type                          SIBSb-TypeAndTag,
    scheduling                          SchedulingInformation
}

SegCount ::=                        INTEGER (1..16)

SegmentIndex ::=                    INTEGER (1..15)

-- Actual value SFN-Prime = 2 * IE value
SFN-Prime ::=                       INTEGER (0..2047)


SIB-Data-fixed ::=                  BIT STRING (SIZE (222))


SIB-Data-variable ::=               BIT STRING (SIZE (1..214))

SIBOccurIdentity ::=            INTEGER (0..15)

SIBOccurrenceIdentityAndValueTag ::=    SEQUENCE {
    sibOccurIdentity                SIBOccurIdentity,
    sibOccurValueTag                SIBOccurValueTag
}

SIBOccurValueTag ::=            INTEGER (0..15)

SIB-ReferenceList ::=               SEQUENCE (SIZE (1..maxSIB)) OF
                                        SchedulingInformationSIB

SIBSb-ReferenceList ::=             SEQUENCE (SIZE (1..maxSIB)) OF
                                        SchedulingInformationSIBSb

SIB-ReferenceListFACH ::=           SEQUENCE (SIZE (1..maxSIB-FACH)) OF
                                        SchedulingInformationSIB

SIB-Type ::=                        ENUMERATED {
                                        masterInformationBlock,
                                        systemInformationBlockType1,
                                        systemInformationBlockType2,
                                        systemInformationBlockType3,
                                        systemInformationBlockType4,
                                        systemInformationBlockType5,
                                        systemInformationBlockType6,
                                        systemInformationBlockType7,
        -- dummy, dummy2 and dummy3 are not used in this version of the specification,
        -- they should not be sent. If they are received they should be ignored
                                        dummy,
                                        dummy2,
                                        dummy3,
                                        systemInformationBlockType11,
                                        systemInformationBlockType12,
                                        systemInformationBlockType13,
                                        systemInformationBlockType13-1,
                                        systemInformationBlockType13-2,
                                        systemInformationBlockType13-3,
                                        systemInformationBlockType13-4,
                                        systemInformationBlockType14,
                                        systemInformationBlockType15,
                                        systemInformationBlockType15-1,
                                        systemInformationBlockType15-2,
                                        systemInformationBlockType15-3,
                                        systemInformationBlockType16,
                                        systemInformationBlockType17,
                                        systemInformationBlockType15-4,
                                        systemInformationBlockType18,
                                        schedulingBlock1,
                                        schedulingBlock2,
                                        systemInformationBlockType15-5,
                                        systemInformationBlockType5bis,
                                        extensionType }

SIB-TypeAndTag ::=                  CHOICE {
    sysInfoType1                        PLMN-ValueTag,
    sysInfoType2                        CellValueTag,
    sysInfoType3                        CellValueTag,
    sysInfoType4                        CellValueTag,
    sysInfoType5                        CellValueTag,
    sysInfoType6                        CellValueTag,
```

```
    sysInfoType7                        NULL,
    -- dummy, dummy2 and dummy3 are not used in this version of the specification,
    -- they should not be sent. If they are received the UE behaviour is not specified.
    dummy                               CellValueTag,
    dummy2                              NULL,
    dummy3                              NULL,
    sysInfoType11                       CellValueTag,
    sysInfoType12                       CellValueTag,
    sysInfoType13                       CellValueTag,
    sysInfoType13-1                     CellValueTag,
    sysInfoType13-2                     CellValueTag,
    sysInfoType13-3                     CellValueTag,
    sysInfoType13-4                     CellValueTag,
    sysInfoType14                       NULL,
    sysInfoType15                       CellValueTag,
    sysInfoType16                       PredefinedConfigIdentityAndValueTag,
    sysInfoType17                       NULL,
    sysInfoType15-1                     CellValueTag,
    sysInfoType15-2                     SIBOccurrenceIdentityAndValueTag,
    sysInfoType15-3                     SIBOccurrenceIdentityAndValueTag,
    sysInfoType15-4                     CellValueTag,
    sysInfoType18                       CellValueTag,
    sysInfoType15-5                     CellValueTag,
    sysInfoType5bis                     CellValueTag,
    spare4                              NULL,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}

SIBSb-TypeAndTag ::=                    CHOICE {
    sysInfoType1                        PLMN-ValueTag,
    sysInfoType2                        CellValueTag,
    sysInfoType3                        CellValueTag,
    sysInfoType4                        CellValueTag,
    sysInfoType5                        CellValueTag,
    sysInfoType6                        CellValueTag,
    sysInfoType7                        NULL,
    -- dummy, dummy2 and dummy3 are not used in this version of the specification,
    -- they should not be sent. If they are received the UE behaviour is not specified.
    dummy                               CellValueTag,
    dummy2                              NULL,
    dummy3                              NULL,
    sysInfoType11                       CellValueTag,
    sysInfoType12                       CellValueTag,
    sysInfoType13                       CellValueTag,
    sysInfoType13-1                     CellValueTag,
    sysInfoType13-2                     CellValueTag,
    sysInfoType13-3                     CellValueTag,
    sysInfoType13-4                     CellValueTag,
    sysInfoType14                       NULL,
    sysInfoType15                       CellValueTag,
    sysInfoType16                       PredefinedConfigIdentityAndValueTag,
    sysInfoType17                       NULL,
    sysInfoTypeSB1                      CellValueTag,
    sysInfoTypeSB2                      CellValueTag,
    sysInfoType15-1                     CellValueTag,
    sysInfoType15-2                     SIBOccurrenceIdentityAndValueTag,
    sysInfoType15-3                     SIBOccurrenceIdentityAndValueTag,
    sysInfoType15-4                     CellValueTag,
    sysInfoType18                       CellValueTag,
    sysInfoType15-5                     CellValueTag,
    sysInfoType5bis                     CellValueTag,
    spare2                              NULL,
    spare1                              NULL
}

SIB-TypeExt ::=                     CHOICE {
    systemInformationBlockType11bis     NULL,
    spare7                              NULL,
    spare6                              NULL,
    spare5                              NULL,
    spare4                              NULL,
    spare3                              NULL,
    spare2                              NULL,
    spare1                              NULL
}
```

```
SibOFF ::=                          ENUMERATED {
                                        so2, so4, so6, so8, so10,
                                        so12, so14, so16, so18,
                                        so20, so22, so24, so26,
                                        so28, so30, so32 }

SibOFF-List ::=                     SEQUENCE (SIZE (1..15)) OF
                                        SibOFF

SysInfoType1 ::=                    SEQUENCE {
    -- Core network IEs
        cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
        cn-DomainSysInfoList            CN-DomainSysInfoList,
    -- User equipment IEs
        ue-ConnTimersAndConstants       UE-ConnTimersAndConstants           OPTIONAL,
        ue-IdleTimersAndConstants       UE-IdleTimersAndConstants           OPTIONAL,
    -- Extension mechanism for non- release99 information
        v3a0NonCriticalExtensions       SEQUENCE {
            sysInfoType1-v3a0ext        SysInfoType1-v3a0ext-IEs,
            nonCriticalExtensions       SEQUENCE {} OPTIONAL
        }                               OPTIONAL
}

SysInfoType1-v3a0ext-IEs ::= SEQUENCE {
    ue-ConnTimersAndConstants-v3a0ext       UE-ConnTimersAndConstants-v3a0ext,
    ue-IdleTimersAndConstants-v3a0ext       UE-IdleTimersAndConstants-v3a0ext
}

SysInfoType2 ::=                    SEQUENCE {
    -- UTRAN mobility IEs
        ura-IdentityList                URA-IdentityList,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

SysInfoType3 ::=                    SEQUENCE {
        sib4indicator                   BOOLEAN,
    -- UTRAN mobility IEs
        cellIdentity                    CellIdentity,
        cellSelectReselectInfo          CellSelectReselectInfoSIB-3-4,
        cellAccessRestriction           CellAccessRestriction,
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions       SEQUENCE {
            sysInfoType3-v4b0ext            SysInfoType3-v4b0ext-IEs,
            v590NonCriticalExtension        SEQUENCE {
                sysInfoType3-v590ext            SysInfoType3-v590ext,
                v5c0NoncriticalExtension        SEQUENCE {
                    sysInfoType3-v5c0ext            SysInfoType3-v5c0ext-IEs,
                    v670NonCriticalExtension            SEQUENCE {
                        sysInfoType3-v670ext                SysInfoType3-v670ext,
                        nonCriticalExtensions               SEQUENCE {}                 OPTIONAL
                    }                                   OPTIONAL
                }                               OPTIONAL
            }                               OPTIONAL
        }                               OPTIONAL
}

SysInfoType3-v4b0ext-IEs ::= SEQUENCE {
    mapping-LCR                     Mapping-LCR-r4                          OPTIONAL
}

SysInfoType3-v590ext ::= SEQUENCE {
    cellSelectReselectInfo-v590ext      CellSelectReselectInfo-v590ext      OPTIONAL
}

SysInfoType3-v5c0ext-IEs ::= SEQUENCE {
    cellSelectReselectInfoTreselectionScaling-v5c0ext
                                        CellSelectReselectInfoTreselectionScaling-v5c0ext   OPTIONAL
}

SysInfoType3-v670ext ::= SEQUENCE {
        domainSpecificAccessRestrictionParametersForPLMNOfMIB
                                    DomainSpecificAccessRestrictionParam-v670ext    OPTIONAL,
        domainSpecificAccessRestictionForSharedNetwork
                                    DomainSpecificAccessRestrictionForSharedNetwork-v670ext OPTIONAL
}

SysInfoType4 ::=                    SEQUENCE {
```

```
    -- UTRAN mobility IEs
        cellIdentity                    CellIdentity,
        cellSelectReselectInfo          CellSelectReselectInfoSIB-3-4,
        cellAccessRestriction           CellAccessRestriction,
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions       SEQUENCE {
            sysInfoType4-v4b0ext            SysInfoType4-v4b0ext-IEs,
            v590NonCriticalExtension        SEQUENCE {
                sysInfoType4-v590ext            SysInfoType4-v590ext,
                v5b0NonCriticalExtension        SEQUENCE {
                    sysInfoType4-v5b0ext            SysInfoType4-v5b0ext-IEs,
                    v5c0NonCriticalExtension            SEQUENCE {
                        sysInfoType4-v5c0ext                SysInfoType4-v5c0ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}                     OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

SysInfoType4-v4b0ext-IEs ::= SEQUENCE {
    mapping-LCR                     Mapping-LCR-r4                          OPTIONAL
}


SysInfoType4-v590ext ::= SEQUENCE {
    cellSelectReselectInfo-v590ext      CellSelectReselectInfo-v590ext      OPTIONAL
}

SysInfoType4-v5b0ext-IEs ::= SEQUENCE {
    cellSelectReselectInfoPCHFACH-v5b0ext   CellSelectReselectInfoPCHFACH-v5b0ext       OPTIONAL
}

SysInfoType4-v5c0ext-IEs ::= SEQUENCE {
    cellSelectReselectInfoTreselectionScaling-v5c0ext
                                        CellSelectReselectInfoTreselectionScaling-v5c0ext   OPTIONAL
}

SysInfoType5 ::=                    SEQUENCE {
        sib6indicator                   BOOLEAN,
    -- Physical channel IEs
        pich-PowerOffset                PICH-PowerOffset,
        modeSpecificInfo                CHOICE {
            fdd                             SEQUENCE {
                aich-PowerOffset                AICH-PowerOffset
            },
            tdd                             SEQUENCE {
    -- If PDSCH/PUSCH is configured for 1.28Mcps TDD, the following IEs should be absent
    --   and the info included in the tdd128SpecificInfo instead.
    -- If PDSCH/PUSCH is configured for 3.84Mcps TDD in R5, HCR-r5-SpecificInfo should also be
    -- included.
                pusch-SysInfoList-SFN           PUSCH-SysInfoList-SFN       OPTIONAL,
                pdsch-SysInfoList-SFN           PDSCH-SysInfoList-SFN       OPTIONAL,
                openLoopPowerControl-TDD        OpenLoopPowerControl-TDD
            }
        },
        primaryCCPCH-Info               PrimaryCCPCH-Info                   OPTIONAL,
        prach-SystemInformationList     PRACH-SystemInformationList,
        sCCPCH-SystemInformationList    SCCPCH-SystemInformationList,
        -- cbs-DRX-LevelInformation is conditional on any of the CTCH indicator IEs in
        -- sCCPCH-SystemInformationList
        cbs-DRX-LevelInformation        CBS-DRX-LevelInformation            OPTIONAL,
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions       SEQUENCE {
            sysInfoType5-v4b0ext            SysInfoType5-v4b0ext-IEs        OPTIONAL,
        -- Extension mechanism for non- rel-4 information
            v590NonCriticalExtensions       SEQUENCE {
                sysInfoType5-v590ext            SysInfoType5-v590ext-IEs        OPTIONAL,
                v650NonCriticalExtensions       SEQUENCE {
                    sysInfoType5-v650ext            SysInfoType5-v650ext-IEs        OPTIONAL,
                    v680NonCriticalExtensions       SEQUENCE {
                        sysInfoType5-v680ext            SysInfoType5-v680ext-IEs        OPTIONAL,
                        v690NonCriticalExtensions       SEQUENCE {
                            sysInfoType5-v690ext            SysInfoType5-v690ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
                                sysInfoType5-v7xyext            SysInfoType5-v7xyext-IEs,
                                nonCriticalExtensions           SEQUENCE {}             OPTIONAL
                            }       OPTIONAL
```

```
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
}

SysInfoType5-v4b0ext-IEs ::= SEQUENCE {
    --The following IE PNBSCH-Allocation-r4 shall be used for 3.84Mcps TDD only.
    pNBSCH-Allocation-r4            PNBSCH-Allocation-r4            OPTIONAL,
    -- In case of TDD, the following IE is included instead of the
    -- IE up-IPDL-Parameter in up-OTDOA-AssistanceData.
    openLoopPowerControl-IPDL-TDD   OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL,
-- If SysInfoType5 is sent to describe a 1.28Mcps TDD cell, the IE PRACH-RACH-Info included in
-- PRACH-SystemInformationList shall be ignored, the IE PRACH-Partitioning and the
-- IE rach-TransportFormatSet shall be absent and the corresponding IE in the following
-- PRACH-SystemInformationList-LCR-r4 shall be used
    prach-SystemInformationList-LCR-r4  PRACH-SystemInformationList-LCR-r4  OPTIONAL,
    tdd128SpecificInfo              SEQUENCE {
        pusch-SysInfoList-SFN           PUSCH-SysInfoList-SFN-LCR-r4    OPTIONAL,
        pdsch-SysInfoList-SFN           PDSCH-SysInfoList-SFN-LCR-r4    OPTIONAL,
        pCCPCH-LCR-Extensions           PrimaryCCPCH-Info-LCR-r4-ext    OPTIONAL,
        sCCPCH-LCR-ExtensionsList       SCCPCH-SystemInformationList-LCR-r4-ext
    }                                                               OPTIONAL,
    frequencyBandIndicator          RadioFrequencyBandFDD           OPTIONAL
}

SysInfoType5-v590ext-IEs ::= SEQUENCE {
    hcr-r5-SpecificInfo             SEQUENCE {
        pusch-SysInfoList-SFN           PUSCH-SysInfoList-SFN-HCR-r5    OPTIONAL,
        pdsch-SysInfoList-SFN           PDSCH-SysInfoList-SFN-HCR-r5    OPTIONAL
    }                                                               OPTIONAL
}

SysInfoType5-v650ext-IEs ::= SEQUENCE {
    frequencyBandIndicator2         RadioFrequencyBandFDD2
}

SysInfoType5-v680ext-IEs ::= SEQUENCE {
    -- TABULAR: HSDPA Cell Indicator is MD in tabular description
    -- Default value is 'HSDPA Capability not indicated'
    hsdpa-CellIndicator     ENUMERATED { hsdpa-CapableCell }            OPTIONAL
}

SysInfoType5-v690ext-IEs ::=        SEQUENCE {
    -- TABULAR: E-DCH Cell Indicator is MD in tabular description
    -- Default value is 'E-DCH Capability not indicated'
    edch-CellIndicator              ENUMERATED { edch-CapableCell }     OPTIONAL,
    sccpch-SystemInformation-MBMS       CHOICE {
        mcchOnSCCPCHusedForNonMBMS          MBMS-MCCH-ConfigurationInfo-r6,
        mcchOnSCCPCHusedOnlyForMBMS         SCCPCH-SystemInformation-MBMS-r6
    }       OPTIONAL,
    additionalPRACH-TF-and-TFCS-CCCH-List   AdditionalPRACH-TF-and-TFCS-CCCH-List   OPTIONAL,
    cBS-DRX-Level1Information-extension     CBS-DRX-Level1Information-extension-r6  OPTIONAL
}

SysInfoType5-v7xyext-IEs ::=        SEQUENCE {
    pusch-SysInfoList-SFN-VHCR          PUSCH-SysInfoList-SFN-VHCR      OPTIONAL,
    prach-SystemInformationList-r7      PRACH-SystemInformationList-r7  OPTIONAL,
    pdsch-SysInfoList-SFN-r7            PDSCH-SysInfoList-r7            OPTIONAL,
    sccpch-SystemInformation-MBMS       CHOICE {
        mcchOnSCCPCHusedForNonMBMS          MBMS-MCCH-ConfigurationInfo-r6,
        mcchOnSCCPCHusedOnlyForMBMS         SCCPCH-SystemInformation-MBMS-r7
    }       OPTIONAL,
    sCCPCH-SystemInformationList-r7     SCCPCH-SystemInformationList-r7 OPTIONAL
}


-- SysInfoType5bis uses the same structure as SysInfoType5
SysInfoType5bis ::= SysInfoType5

SysInfoType6 ::=                    SEQUENCE {
    -- Physical channel IEs
        pich-PowerOffset                PICH-PowerOffset,
        modeSpecificInfo                CHOICE {
            fdd                             SEQUENCE {
                aich-PowerOffset                AICH-PowerOffset,
                -- dummy is not used in this version of specification, it should
```

```
                -- not be sent and if received it should be ignored.
                dummy                           CSICH-PowerOffset           OPTIONAL
            },
            tdd                             SEQUENCE {
                -- If PDSCH/PUSCH is configured for 1.28Mcps TDD, pusch-SysInfoList-SFN,
                -- pdsch-SysInfoList-SFN and openLoopPowerControl-TDD should be absent
                -- and the info included in the tdd128SpecificInfo instead.
                -- If PDSCH/PUSCH is configured for 3.84Mcps TDD in R5, HCR-r5-SpecificInfo should
                -- also be included.
                pusch-SysInfoList-SFN           PUSCH-SysInfoList-SFN       OPTIONAL,
                pdsch-SysInfoList-SFN           PDSCH-SysInfoList-SFN       OPTIONAL,
                openLoopPowerControl-TDD        OpenLoopPowerControl-TDD
            }
        },
        primaryCCPCH-Info               PrimaryCCPCH-Info                   OPTIONAL,
        prach-SystemInformationList     PRACH-SystemInformationList         OPTIONAL,
        sCCPCH-SystemInformationList    SCCPCH-SystemInformationList        OPTIONAL,
        cbs-DRX-Level1Information       CBS-DRX-Level1Information           OPTIONAL,
        -- Conditional on any of the CTCH indicator IEs in
        -- sCCPCH-SystemInformationList
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions       SEQUENCE {
            sysInfoType6-v4b0ext            SysInfoType6-v4b0ext-IEs        OPTIONAL,
        -- Extension mechanism for non- rel-4 information
            v590NonCriticalExtensions   SEQUENCE {
                sysInfoType6-v590ext            SysInfoType6-v590ext-IEs        OPTIONAL,
                v650nonCriticalExtensions       SEQUENCE {
                    sysInfoType6-v650ext            SysInfoType6-v650ext-IEs        OPTIONAL,
                    v690nonCriticalExtensions       SEQUENCE {
                        sysInfoType6-v690ext            SysInfoType6-v690ext-IEs,
                        v7xyNonCriticalExtensions       SEQUENCE {
                            sysInfoType6-v7xyext            SysInfoType6-v7xyext-IEs,
                            nonCriticalExtensions           SEQUENCE {}                 OPTIONAL
                        }   OPTIONAL
                    }                           OPTIONAL
                }                               OPTIONAL
            }                               OPTIONAL
        }                           OPTIONAL
}

SysInfoType6-v4b0ext-IEs ::= SEQUENCE {
    -- openLoopPowerControl-IPDL-TDD is present only if IPDLs are applied for TDD
    openLoopPowerControl-IPDL-TDD   OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL,
    -- If SysInfoType6 is sent to describe a 1.28Mcps TDD cell, the IE PRACH-RACH-Info included
    -- in PRACH-SystemInformationList shall be ignored, the IE PRACH-Partitioning and the
    -- IE rach-TransportFormatSet shall be absent and the corresponding IEs in the following
    -- PRACH-SystemInformationList-LCR-r4 shall be used
    prach-SystemInformationList-LCR-r4  PRACH-SystemInformationList-LCR-r4  OPTIONAL,
    tdd128SpecificInfo              SEQUENCE {
        pusch-SysInfoList-SFN           PUSCH-SysInfoList-SFN-LCR-r4    OPTIONAL,
        pdsch-SysInfoList-SFN           PDSCH-SysInfoList-SFN-LCR-r4    OPTIONAL,
        pCCPCH-LCR-Extensions           PrimaryCCPCH-Info-LCR-r4-ext    OPTIONAL,
        sCCPCH-LCR-ExtensionsList       SCCPCH-SystemInformationList-LCR-r4-ext OPTIONAL
    }                                                                   OPTIONAL,
    frequencyBandIndicator          RadioFrequencyBandFDD           OPTIONAL
}

SysInfoType6-v590ext-IEs ::= SEQUENCE {
    hcr-r5-SpecificInfo             SEQUENCE {
        pusch-SysInfoList-SFN           PUSCH-SysInfoList-SFN-HCR-r5    OPTIONAL,
        pdsch-SysInfoList-SFN           PDSCH-SysInfoList-SFN-HCR-r5    OPTIONAL
    }                                                                   OPTIONAL
}

SysInfoType6-v650ext-IEs ::= SEQUENCE {
    frequencyBandIndicator2         RadioFrequencyBandFDD2
}

SysInfoType6-v690ext-IEs ::= SEQUENCE {
    additionalPRACH-TF-and-TFCS-CCCH-List   AdditionalPRACH-TF-and-TFCS-CCCH-List   OPTIONAL
}

SysInfoType6-v7xyext-IEs ::=        SEQUENCE {
    pusch-SysInfoList-SFN-VHCR          PUSCH-SysInfoList-SFN-VHCR      OPTIONAL,
    pdsch-SysInfoList-SFN-r7            PDSCH-SysInfoList-r7            OPTIONAL,
    prach-SystemInformationList-r7      PRACH-SystemInformationList-r7  OPTIONAL,
    sCCPCH-SystemInformationList-r7     SCCPCH-SystemInformationList-r7 OPTIONAL
}
```

```
SysInfoType7 ::=                    SEQUENCE {
    -- Physical channel IEs
        modeSpecificInfo                CHOICE {
            fdd                             SEQUENCE {
                ul-Interference                 UL-Interference
            },
            tdd                             NULL
        },
        prach-Information-SIB5-List     DynamicPersistenceLevelList,
        prach-Information-SIB6-List     DynamicPersistenceLevelList         OPTIONAL,
        expirationTimeFactor            ExpirationTimeFactor                OPTIONAL,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

-- This IE is not used in this version of the specification.
-- It was kept only for backwards compatibility reasons
SysInfoType8 ::=                    SEQUENCE {
    -- User equipment IEs
        -- dummy1, dummy2, dummy3 are not used in this version of the specification and
        -- they should be ignored by the receiver.
        dummy1                          CPCH-Parameters,
    -- Physical channel IEs
        dummy2                          CPCH-SetInfoList,
        dummy3                          CSICH-PowerOffset,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

-- This IE is not used in this version of the specification.
-- It was kept only for backwards compatibility reasons
SysInfoType9 ::=                    SEQUENCE {
    -- Physical channel IEs
        -- dummy is not used in this version of the specification and
        -- it should be ignored by the receiver.
        dummy                           CPCH-PersistenceLevelsList,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

-- This IE is not used in this version of the specification.
-- It was kept only for backwards compatibility reasons
SysInfoType10 ::=                   SEQUENCE {
    -- User equipment IEs
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                           DRAC-SysInfoList,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

SysInfoType11 ::=                   SEQUENCE {
        sib12indicator                  BOOLEAN,
    -- Measurement IEs
        fach-MeasurementOccasionInfo    FACH-MeasurementOccasionInfo        OPTIONAL,
        measurementControlSysInfo       MeasurementControlSysInfo,
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions       SEQUENCE {
            sysInfoType11-v4b0ext           SysInfoType11-v4b0ext-IEs       OPTIONAL,
            v590NonCriticalExtension        SEQUENCE {
                sysInfoType11-v590ext           SysInfoType11-v590ext-IEs,
                v690NonCriticalExtensions       SEQUENCE {
                    sysInfoType11-v690ext           SysInfoType11-v690ext-IEs,
                    v6b0NonCriticalExtensions       SEQUENCE {
                        sysInfoType11-v6b0ext           SysInfoType11-v6b0ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}                     OPTIONAL
                    }                               OPTIONAL
                }                               OPTIONAL
            }                               OPTIONAL
        }                               OPTIONAL
}

SysInfoType11-v4b0ext-IEs ::= SEQUENCE {
    fach-MeasurementOccasionInfo-LCR-Ext    FACH-MeasurementOccasionInfo-LCR-r4-ext OPTIONAL,
    measurementControlSysInfo-LCR           MeasurementControlSysInfo-LCR-r4-ext
}
```

```
SysInfoType11-v590ext-IEs ::= SEQUENCE {
    --The order of the list corresponds to the order of cell in newIntraFrequencyCellInfoList
    newIntraFrequencyCellInfoList-v590ext   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    --The order of the list corresponds to the order of cell in newInterFrequencyCellInfoList
    newInterFrequencyCellInfoList-v590ext   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    --The order of the list corresponds to the order of cell in newInterRATCellInfoList
    newInterRATCellInfoList-v590ext         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    intraFreqEventCriteriaList-v590ext      Intra-FreqEventCriteriaList-v590ext     OPTIONAL,
    intraFreqReportingCriteria-1b-r5        IntraFreqReportingCriteria-1b-r5    OPTIONAL,
    intraFreqEvent-1d-r5                    IntraFreqEvent-1d-r5                OPTIONAL
}

SysInfoType11-v690ext-IEs ::= SEQUENCE {
    -- dummy is not used in this version of the specification. If received, the UE behaviour
    -- is not specified.
    dummy                               Dummy-InterFreqRACHReportingInfo    OPTIONAL
}

SysInfoType11-v6b0ext-IEs ::= SEQUENCE {
    -- Measurement IEs
    interFreqRACHReportingInfo          InterFreqRACHReportingInfo          OPTIONAL
}

SysInfoType11bis ::=                SEQUENCE {
    -- Measurement IEs
        measurementControlSysInfo       MeasurementControlSysInfoExtension          OPTIONAL,
        measurementControlSysInfo-LCR   MeasurementControlSysInfoExtension-LCR-r4   OPTIONAL,
        measurementControlSysInfoExtensionAddon-r5
                                        MeasurementControlSysInfoExtensionAddon-r5  OPTIONAL,
    -- Extension mechanism for non-release99 information
        nonCriticalExtensions           SEQUENCE {}     OPTIONAL
}

SysInfoType12 ::=                   SEQUENCE {
    -- Measurement IEs
        fach-MeasurementOccasionInfo    FACH-MeasurementOccasionInfo        OPTIONAL,
        measurementControlSysInfo       MeasurementControlSysInfo,
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions       SEQUENCE {
            sysInfoType12-v4b0ext           SysInfoType12-v4b0ext-IEs       OPTIONAL,
            v590NonCriticalExtension        SEQUENCE {
                sysInfoType12-v590ext           SysInfoType12-v590ext-IEs,
                v690NonCriticalExtensions       SEQUENCE {
                    sysInfoType12-v690ext           SysInfoType12-v690ext-IEs,
                    v6b0NonCriticalExtensions       SEQUENCE {
                        sysInfoType12-v6b0ext           SysInfoType12-v6b0ext-IEs,
                        nonCriticalExtensions           SEQUENCE {}                     OPTIONAL
                    }                               OPTIONAL
                }                               OPTIONAL
            }                               OPTIONAL
        }                               OPTIONAL
}

SysInfoType12-v4b0ext-IEs ::= SEQUENCE {
    fach-MeasurementOccasionInfo-LCR-Ext    FACH-MeasurementOccasionInfo-LCR-r4-ext OPTIONAL,
    measurementControlSysInfo-LCR           MeasurementControlSysInfo-LCR-r4-ext
}

SysInfoType12-v590ext-IEs ::= SEQUENCE {
    --The order of the list corresponds to the order of cell in newIntraFrequencyCellInfoList
    newIntraFrequencyCellInfoList-v590ext   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    --The order of the list corresponds to the order of cell in newInterFrequencyCellInfoList
    newInterFrequencyCellInfoList-v590ext   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    --The order of the list corresponds to the order of cell in newInterRATCellInfoList
    newInterRATCellInfoList-v590ext         SEQUENCE (SIZE (1..maxCellMeas)) OF
                                                CellSelectReselectInfo-v590ext  OPTIONAL,
    intraFreqEventCriteriaList-v590ext      Intra-FreqEventCriteriaList-v590ext     OPTIONAL,
    intraFreqReportingCriteria-1b-r5        IntraFreqReportingCriteria-1b-r5    OPTIONAL,
    intraFreqEvent-1d-r5                    IntraFreqEvent-1d-r5                OPTIONAL
}

SysInfoType12-v690ext-IEs ::= SEQUENCE {
    -- dummy is not used in this version of the specification. If received, the UE behaviour
```

```
    -- is not specified.
    dummy                               Dummy-InterFreqRACHReportingInfo    OPTIONAL
}

SysInfoType12-v6b0ext-IEs ::= SEQUENCE {
    -- Measurement IEs
    interFreqRACHReportingInfo          InterFreqRACHReportingInfo          OPTIONAL
}

SysInfoType13 ::=                   SEQUENCE {
    -- Core network IEs
        cn-DomainSysInfoList            CN-DomainSysInfoList,
    -- User equipment IEs
        ue-IdleTimersAndConstants       UE-IdleTimersAndConstants           OPTIONAL,
        capabilityUpdateRequirement     CapabilityUpdateRequirement         OPTIONAL,
    -- Extension mechanism for non- release99 information
        v3a0NonCriticalExtensions           SEQUENCE {
            sysInfoType13-v3a0ext           SysInfoType13-v3a0ext-IEs,
            v4b0NonCriticalExtensions       SEQUENCE {
                sysInfoType13-v4b0ext           SysInfoType13-v4b0ext-IEs,
            -- Extension mechanism for non- release99 information
                v7xyNonCriticalExtensions       SEQUENCE {
                    sysInfoType13-v7xyext           SysInfoType13-v7xyext-IEs,
                    nonCriticalExtensions           SEQUENCE {}                     OPTIONAL
                }                               OPTIONAL
            }                           OPTIONAL
        }                           OPTIONAL
}

SysInfoType13-v3a0ext-IEs ::= SEQUENCE {
    ue-IdleTimersAndConstants-v3a0ext       UE-IdleTimersAndConstants-v3a0ext
}

SysInfoType13-v4b0ext-IEs ::= SEQUENCE {
    capabilityUpdateRequirement-r4Ext   CapabilityUpdateRequirement-r4-ext  OPTIONAL
}

SysInfoType13-v7xyext-IEs ::= SEQUENCE {
    capabilityUpdateRequirement-r7Ext   CapabilityUpdateRequirement-r7-ext  OPTIONAL
}

SysInfoType13-1 ::=                 SEQUENCE {
    -- ANSI-41 IEs
        ansi-41-RAND-Information        ANSI-41-RAND-Information,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

SysInfoType13-2 ::=                 SEQUENCE {
    -- ANSI-41 IEs
        ansi-41-UserZoneID-Information  ANSI-41-UserZoneID-Information,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

SysInfoType13-3 ::=                 SEQUENCE {
    -- ANSI-41 IEs
        ansi-41-PrivateNeighbourListInfo ANSI-41-PrivateNeighbourListInfo,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

SysInfoType13-4 ::=                 SEQUENCE {
    -- ANSI-41 IEs
        ansi-41-GlobalServiceRedirectInfo
                                        ANSI-41-GlobalServiceRedirectInfo,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

SysInfoType14 ::=                   SEQUENCE {
    -- Physical channel IEs
        individualTS-InterferenceList   IndividualTS-InterferenceList,
        expirationTimeFactor            ExpirationTimeFactor                OPTIONAL,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}
```

```
SysInfoType15 ::=                   SEQUENCE {
    -- Measurement IEs

        ue-positioning-GPS-CipherParameters     UE-Positioning-CipherParameters     OPTIONAL,
        ue-positioning-GPS-ReferenceLocation    ReferenceLocation,
        ue-positioning-GPS-ReferenceTime        UE-Positioning-GPS-ReferenceTime,

        ue-positioning-GPS-Real-timeIntegrity       BadSatList                          OPTIONAL,
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions           SEQUENCE {
            sysInfoType15-v4b0ext               SysInfoType15-v4b0ext-IEs,
        -- Extension mechanism for non- release4 information
            nonCriticalExtensions               SEQUENCE {}             OPTIONAL
        }   OPTIONAL
}

SysInfoType15-v4b0ext-IEs ::= SEQUENCE {
    up-Ipdl-Parameters-TDD          UE-Positioning-IPDL-Parameters-TDD-r4-ext   OPTIONAL
}

SysInfoType15-1 ::=                 SEQUENCE {
    -- DGPS corrections
        ue-positioning-GPS-DGPS-Corrections         UE-Positioning-GPS-DGPS-Corrections,

    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}             OPTIONAL
}

SysInfoType15-2 ::=                 SEQUENCE {
    -- Ephemeris and clock corrections
        transmissionTOW                 INTEGER (0..604799),
        satID                           SatID,
        ephemerisParameter              EphemerisParameter,

    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}         OPTIONAL
}

SysInfoType15-3 ::=                 SEQUENCE {
    -- Almanac and other data
        transmissionTOW                 INTEGER (0.. 604799),
        ue-positioning-GPS-Almanac                  UE-Positioning-GPS-Almanac
    OPTIONAL,
        ue-positioning-GPS-IonosphericModel         UE-Positioning-GPS-IonosphericModel
    OPTIONAL,
        ue-positioning-GPS-UTC-Model                UE-Positioning-GPS-UTC-Model
    OPTIONAL,
        satMask                         BIT STRING (SIZE (1..32))   OPTIONAL,
        lsbTOW                          BIT STRING (SIZE (8))       OPTIONAL,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                 OPTIONAL
}

SysInfoType15-4 ::=                 SEQUENCE {
    -- Measurement IEs
        ue-positioning-OTDOA-CipherParameters   UE-Positioning-CipherParameters         OPTIONAL,
        ue-positioning-OTDOA-AssistanceData     UE-Positioning-OTDOA-AssistanceData,
        v3a0NonCriticalExtensions           SEQUENCE {
            sysInfoType15-4-v3a0ext             SysInfoType15-4-v3a0ext,
        -- Extension mechanism for non- release99 information
            v4b0NonCriticalExtensions           SEQUENCE {
                sysInfoType15-4-v4b0ext             SysInfoType15-4-v4b0ext,
                nonCriticalExtensions               SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

SysInfoType15-4-v3a0ext ::= SEQUENCE {
    sfn-Offset-Validity             SFN-Offset-Validity     OPTIONAL
}

SysInfoType15-4-v4b0ext ::= SEQUENCE {
    ue-Positioning-OTDOA-AssistanceData-r4ext   UE-Positioning-OTDOA-AssistanceData-r4ext   OPTIONAL
}

SysInfoType15-5 ::=                 SEQUENCE {
    -- Measurement IEs
        ue-positioning-OTDOA-AssistanceData-UEB     UE-Positioning-OTDOA-AssistanceData-UEB,
```

```
        v3a0NonCriticalExtensions           SEQUENCE {
            sysInfoType15-5-v3a0ext             SysInfoType15-5-v3a0ext,
            -- Extension mechanism for non- release99 information
            v7xyNonCriticalExtensions           SEQUENCE {
                sysInfoType15-5-v7xyext             SysInfoType15-5-v7xyext-IEs,
                nonCriticalExtensions               SEQUENCE {}     OPTIONAL
            }   OPTIONAL
        }   OPTIONAL
}

SysInfoType15-5-v3a0ext ::= SEQUENCE {
    sfn-Offset-Validity         SFN-Offset-Validity     OPTIONAL
}

SysInfoType15-5-v7xyext-IEs ::=     SEQUENCE {
    ue-Positioning-OTDOA-AssistanceData-UEB-ext
                                        UE-Positioning-OTDOA-AssistanceData-UEB-ext     OPTIONAL
}

SysInfoType16 ::=                   SEQUENCE {
    -- Radio bearer IEs
        preDefinedRadioConfiguration    PreDefRadioConfiguration,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

SysInfoType17 ::=                   SEQUENCE {
    -- Physical channel IEs
        -- If PDSCH/PUSCH is configured for 1.28Mcps TDD, pusch-SysInfoList and
        -- pdsch-SysInfoList should be absent and the info included in the
        -- tdd128SpecificInfo instead.
        -- If PDSCH/PUSCH is configured for 3.84Mcps TDD in R5, HCR-r5-SpecificInfo should also be
        -- included.
        pusch-SysInfoList               PUSCH-SysInfoList               OPTIONAL,
        pdsch-SysInfoList               PDSCH-SysInfoList               OPTIONAL,
    -- Extension mechanism for non- release99 information
        v4b0NonCriticalExtensions       SEQUENCE {
            sysInfoType17-v4b0ext           SysInfoType17-v4b0ext-IEs,
            v590NonCriticalExtensions   SEQUENCE {
                sysInfoType17-v590ext           SysInfoType17-v590ext-IEs       OPTIONAL,
                v7xyNonCriticalExtensions       SEQUENCE {
                    sysInfoType17-v7xyext           SysInfoType17-v7xyext-IEs,
                    nonCriticalExtensions           SEQUENCE {}             OPTIONAL
                }                           OPTIONAL
            }                           OPTIONAL
        }                           OPTIONAL
}

SysInfoType17-v4b0ext-IEs ::= SEQUENCE {
    tdd128SpecificInfo              SEQUENCE {
        pusch-SysInfoList               PUSCH-SysInfoList-LCR-r4        OPTIONAL,
        pdsch-SysInfoList               PDSCH-SysInfoList-LCR-r4        OPTIONAL
    }                                                                   OPTIONAL
}

SysInfoType17-v590ext-IEs ::= SEQUENCE {
    hcr-r5-SpecificInfo             SEQUENCE {
        pusch-SysInfoList           PUSCH-SysInfoList-HCR-r5    OPTIONAL,
        pdsch-SysInfoList           PDSCH-SysInfoList-HCR-r5    OPTIONAL
    }                                                           OPTIONAL
}

SysInfoType17-v7xyext-IEs ::=       SEQUENCE {
    pusch-SysInfoList-SFN-VHCR          PUSCH-SysInfoList-SFN-VHCR      OPTIONAL,
    pdsch-SysInfoList-r7                PDSCH-SysInfoList-r7            OPTIONAL
}

SysInfoType18 ::=                       SEQUENCE {
        idleModePLMNIdentities          PLMNIdentitiesOfNeighbourCells      OPTIONAL,
        connectedModePLMNIdentities PLMNIdentitiesOfNeighbourCells      OPTIONAL,
    -- Extension mechanism for non- release99 information
        v6b0NonCriticalExtensions       SEQUENCE {
            sysInfoType18-v6b0ext           SysInfoType18-v6b0ext,
            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
        }   OPTIONAL
}

SysInfoType18-v6b0ext ::=               SEQUENCE {
```

```
        idleModePLMNIdentitiesSIB11bis      PLMNIdentitiesOfNeighbourCells      OPTIONAL,
        connectedModePLMNIdentitiesSIB11bis PLMNIdentitiesOfNeighbourCells      OPTIONAL
}

SysInfoTypeSB1 ::=                  SEQUENCE {
    -- Other IEs
        sib-ReferenceList               SIB-ReferenceList,
    -- Extension mechanism for non- release99 information
        v6b0NonCriticalExtensions       SEQUENCE {
            sysInfoTypeSB1-v6b0ext          SysInfoTypeSB1-v6b0ext,
            nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
        }   OPTIONAL
}

SysInfoTypeSB1-v6b0ext ::=          SEQUENCE {
    extSIBTypeInfoSchedulingInfo-List   ExtSIBTypeInfoSchedulingInfo-List       OPTIONAL
}

SysInfoTypeSB2 ::=                  SEQUENCE {
    -- Other IEs
        sib-ReferenceList               SIB-ReferenceList,
    -- Extension mechanism for non- release99 information
        v6b0NonCriticalExtensions       SEQUENCE {
            sysInfoTypeSB2-v6b0ext          SysInfoTypeSB2-v6b0ext,
            nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
        }   OPTIONAL
}

SysInfoTypeSB2-v6b0ext ::=          SEQUENCE {
    extSIBTypeInfoSchedulingInfo-List   ExtSIBTypeInfoSchedulingInfo-List       OPTIONAL
}

TDD-UMTS-Frequency-List ::=             SEQUENCE (SIZE (1..maxNumTDDFreqs)) OF
                                            FrequencyInfoTDD

-- For systemInformationBlockType11bis the Value Tag Info "CellValueTag" is used
ValueTagInfo ::= CHOICE {
    none                                NULL,
    cellValueTag                        CellValueTag,
    plmn-ValueTag                       PLMN-ValueTag,
    sIBOccurrenceIdentityAndValueTag    SIBOccurrenceIdentityAndValueTag
}

-- ************************************************
--
--     ANSI-41 INFORMATION ELEMENTS (10.3.9)
--
-- ************************************************

ANSI-41-GlobalServiceRedirectInfo ::=   ANSI-41-NAS-Parameter
ANSI-41-PrivateNeighbourListInfo ::=    ANSI-41-NAS-Parameter
ANSI-41-RAND-Information ::=            ANSI-41-NAS-Parameter
ANSI-41-UserZoneID-Information ::=      ANSI-41-NAS-Parameter
ANSI-41-NAS-Parameter ::=               BIT STRING (SIZE (1..2048))

Min-P-REV ::=                           BIT STRING (SIZE (8))

NAS-SystemInformationANSI-41 ::=        ANSI-41-NAS-Parameter
NID ::=                                 BIT STRING (SIZE (16))

P-REV ::=                               BIT STRING (SIZE (8))

SID ::=                                 BIT STRING (SIZE (15))

-- ************************************************
--
--     MBMS INFORMATION ELEMENTS (10.3.9a)
--
-- ************************************************

MBMS-AccessProbabilityFactor ::=    ENUMERATED {
                                        apf0, apf32, apf64, apf96, apf128, apf160, apf192,
                                        apf224, apf256, apf288, apf320, apf352, apf384, apf416,
                                        apf448, apf480, apf512, apf544, apf576, apf608, apf640,
                                        apf672, apf704, apf736, apf768, apf800, apf832, apf864,
                                        apf896, apf928, apf960, apf1000 }

MBMS-CellGroupIdentity-r6 ::=       BIT STRING (SIZE (12))
```

```
MBMS-CommonCCTrChIdentity ::=       INTEGER (1..32)

MBMS-CommonPhyChIdentity ::=        INTEGER (1..32)

MBMS-CommonRBIdentity ::=           INTEGER (1..32)

MBMS-CommonRBInformation-r6 ::=     SEQUENCE {
    commonRBIdentity                    MBMS-CommonRBIdentity,
    pdcp-Info                           PDCP-Info-r4,
    rlc-Info                            RLC-Info-MTCH-r6
}

MBMS-CommonRBInformationList-r6 ::= SEQUENCE (SIZE (1..maxMBMS-CommonRB)) OF
                                    MBMS-CommonRBInformation-r6

MBMS-CommonTrChIdentity ::=         INTEGER (1..32)

MBMS-ConnectedModeCountingScope ::= SEQUENCE {
    countingForUraPCH                           BOOLEAN,
    countingForCellPCH                          BOOLEAN,
    countingForCellFACH                         BOOLEAN
}

MBMS-CurrentCell-SCCPCH-r6 ::=      SEQUENCE {
    sccpchIdentity                      MBMS-SCCPCHIdentity                 OPTIONAL,
    secondaryCCPCH-Info                 MBMS-CommonPhyChIdentity,
    softComb-TimingOffset               MBMS-SoftComb-TimingOffset          OPTIONAL,
    -- If the IE transpCh-InfoCommonForAllTrCh is absent, the default TFCS as specified
    -- in 14.10.1 applies
    transpCh-InfoCommonForAllTrCh       MBMS-CommonCCTrChIdentity           OPTIONAL,
    transpCHInformation                 MBMS-TrCHInformation-CurrList
}

MBMS-CurrentCell-SCCPCHList-r6 ::=  SEQUENCE (SIZE (1..maxSCCPCH)) OF
                                    MBMS-CurrentCell-SCCPCH-r6

MBMS-FACHCarryingMTCH-List ::=      SEQUENCE (SIZE (1..maxFACHPCH)) OF
                                        TransportFormatSet

MBMS-JoinedInformation-r6 ::=       SEQUENCE {
    p-TMSI                              P-TMSI-GSM-MAP                      OPTIONAL
}

MBMS-L1CombiningSchedule-32 ::=     SEQUENCE {
    -- Actual L1 combining schedule values (offset, start, duration) = IE value * 4
    cycleOffset                         INTEGER (0..7)                      OPTIONAL,
    mtch-L1CombiningPeriodList          SEQUENCE (SIZE (1..maxMBMS-L1CP)) OF SEQUENCE {
        periodStart                         INTEGER (0..7),
        periodDuration                      INTEGER (1..8)
    }
}

MBMS-L1CombiningSchedule-64 ::=     SEQUENCE {
    -- Actual L1 combining schedule values (offset, start, duration) = IE value * 4
    cycleOffset                         INTEGER (0..15)                     OPTIONAL,
    mtch-L1CombiningPeriodList          SEQUENCE (SIZE (1..maxMBMS-L1CP)) OF SEQUENCE {
        periodStart                         INTEGER (0..15),
        periodDuration                      INTEGER (1..16)
    }
}

MBMS-L1CombiningSchedule-128 ::=    SEQUENCE {
    -- Actual L1 combining schedule values (offset, start, duration) = IE value * 4
    cycleOffset                         INTEGER (0..31)                     OPTIONAL,
    mtch-L1CombiningPeriodList          SEQUENCE (SIZE (1..maxMBMS-L1CP)) OF SEQUENCE {
        periodStart                         INTEGER (0..31),
        periodDuration                      INTEGER (1..32)
    }
}

MBMS-L1CombiningSchedule-256 ::=    SEQUENCE {
    -- Actual L1 combining schedule values (offset, start, duration) = IE value * 4
    cycleOffset                         INTEGER (0..63)                     OPTIONAL,
    mtch-L1CombiningPeriodList          SEQUENCE (SIZE (1..maxMBMS-L1CP)) OF SEQUENCE {
        periodStart                         INTEGER (0..63),
        periodDuration                      INTEGER (1..64)
    }
```

```
}

MBMS-L1CombiningSchedule-512 ::=    SEQUENCE {
    -- Actual L1 combining schedule values (offset, start, duration) = IE value * 4
    cycleOffset                         INTEGER (0..127)                        OPTIONAL,
    mtch-L1CombiningPeriodList          SEQUENCE (SIZE (1..maxMBMS-L1CP)) OF SEQUENCE {
        periodStart                         INTEGER (0..127),
        periodDuration                      INTEGER (1..128)
    }
}

MBMS-L1CombiningSchedule-1024 ::=   SEQUENCE {
    -- Actual L1 combining schedule values (offset, start, duration) = IE value * 4
    cycleOffset                         INTEGER (0..255)                        OPTIONAL,
    mtch-L1CombiningPeriodList          SEQUENCE (SIZE (1..maxMBMS-L1CP)) OF SEQUENCE {
        periodStart                         INTEGER (0..255),
        periodDuration                      INTEGER (1..256)
    }
}

MBMS-L1CombiningSchedule ::=        CHOICE {
    cycleLength-32                      MBMS-L1CombiningSchedule-32,
    cycleLength-64                      MBMS-L1CombiningSchedule-64,
    cycleLength-128                     MBMS-L1CombiningSchedule-128,
    cycleLength-256                     MBMS-L1CombiningSchedule-256,
    cycleLength-512                     MBMS-L1CombiningSchedule-512,
    cycleLength-1024                    MBMS-L1CombiningSchedule-1024
}

MBMS-L1CombiningTransmTimeDiff ::=  INTEGER (0..3)

MBMS-L23Configuration ::=           CHOICE {
    sameAsCurrent                       SEQUENCE {
        currentCell-SCCPCH                  MBMS-SCCPCHIdentity,
        msch-ConfigurationInfo              MBMS-MSCH-ConfigurationInfo-r6      OPTIONAL
    },
    different                           SEQUENCE {
        -- If the IE transpCh-InfoCommonForAllTrCh is absent, the default TFCS as specified
        -- in 14.10.1 applies
        transpCh-InfoCommonForAllTrCh       MBMS-CommonCCTrChIdentity           OPTIONAL,
        transpCHInformation                 MBMS-TrCHInformation-NeighbList
    }
}

MBMS-LogicalChIdentity ::=          INTEGER (1..15)

MBMS-MCCH-ConfigurationInfo-r6 ::=  SEQUENCE {
    accessInfoPeriodCoefficient         INTEGER (0..3),
    repetitionPeriodCoefficient         INTEGER (0..3),
    modificationPeriodCoefficient       INTEGER (7..10),
    rlc-Info                            RLC-Info-MCCH-r6,
    tctf-Presence                       MBMS-TCTF-Presence                  OPTIONAL
}

MBMS-MICHConfigurationInfo-r6 ::=   SEQUENCE {
    michPowerOffset                     MBMS-MICHPowerOffset,
    mode                                CHOICE {
        fdd                                 SEQUENCE {
            channelisationCode256               ChannelisationCode256,
            ni-CountPerFrame                    MBMS-NI-CountPerFrame,
            sttd-Indicator                      BOOLEAN
        },
        tdd384                              SEQUENCE {
            timeslot                            TimeslotNumber,
            midambleShiftAndBurstType           MidambleShiftAndBurstType,
            channelisationCode                  DL-TS-ChannelisationCode,
            repetitionPeriodLengthOffset        RepPerLengthOffset-MICH     OPTIONAL,
            mbmsNotificationIndLength           MBMS-MICHNotificationIndLength  DEFAULT mn4
        },
        tdd128                              SEQUENCE {
            timeslot                            TimeslotNumber-LCR-r4,
            midambleShiftAndBurstType           MidambleShiftAndBurstType-LCR-r4,
            channelisationCodeList              SEQUENCE (SIZE (1..2)) OF
                                                    DL-TS-ChannelisationCode,
            repetitionPeriodLengthOffset        RepPerLengthOffset-MICH     OPTIONAL,
            mbmsNotificationIndLength           MBMS-MICHNotificationIndLength  DEFAULT mn4
        }
    }
```

```
}

MBMS-MICHConfigurationInfo-r7 ::=   SEQUENCE {
    michPowerOffset                     MBMS-MICHPowerOffset,
    mode                                CHOICE {
        fdd                                 SEQUENCE {
            channelisationCode256               ChannelisationCode256,
            ni-CountPerFrame                    MBMS-NI-CountPerFrame,
            sttd-Indicator                      BOOLEAN
        },
        tdd384                              SEQUENCE {
            timeslot                            TimeslotNumber,
            midambleShiftAndBurstType           MidambleShiftAndBurstType,
            channelisationCode                  DL-TS-ChannelisationCode,
            repetitionPeriodLengthOffset        RepPerLengthOffset-MICH     OPTIONAL,
            mbmsNotificationIndLength           MBMS-MICHNotificationIndLength  DEFAULT mn4
        },
        tdd768                              SEQUENCE {
            timeslot                            TimeslotNumber,
            midambleShiftAndBurstType           MidambleShiftAndBurstType-VHCR,
            channelisationCode                  DL-TS-ChannelisationCode,
            repetitionPeriodLengthOffset        RepPerLengthOffset-MICH     OPTIONAL,
            mbmsNotificationIndLength           MBMS-MICHNotificationIndLength  DEFAULT mn4
        },
        tdd128                              SEQUENCE {
            timeslot                            TimeslotNumber-LCR-r4,
            midambleShiftAndBurstType           MidambleShiftAndBurstType-LCR-r4,
            channelisationCodeList              SEQUENCE (SIZE (1..2)) OF
                                                    DL-TS-ChannelisationCode,
            repetitionPeriodLengthOffset        RepPerLengthOffset-MICH     OPTIONAL,
            mbmsNotificationIndLength           MBMS-MICHNotificationIndLength  DEFAULT mn4
        }
    }
}

MBMS-MICHNotificationIndLength ::=  ENUMERATED { mn4, mn8, mn16 }

MBMS-MICHPowerOffset ::=            INTEGER (-10..5)

MBMS-ModifedService-r6 ::=          SEQUENCE {
    mbms-TransmissionIdentity           MBMS-TransmissionIdentity,
    mbms-RequiredUEAction               MBMS-RequiredUEAction-Mod,
    mbms-PreferredFrequency             CHOICE {
        mcch                                MBMS-PFLIndex,
        dcch                                MBMS-PFLInfo
    }       OPTIONAL,
    mbms-DispersionIndicator            ENUMERATED { true }                 OPTIONAL,
    continueMCCHReading                 BOOLEAN
}

MBMS-ModifedServiceList-r6 ::=      SEQUENCE (SIZE (1..maxMBMSservModif)) OF
                                        MBMS-ModifedService-r6

MBMS-MSCH-ConfigurationInfo-r6 ::=  SEQUENCE {
    mschShedulingInfo                   MBMS-MSCHSchedulingInfo             OPTIONAL,
    rlc-Info                            RLC-Info-MSCH-r6                    OPTIONAL,
    tctf-Presence                       MBMS-TCTF-Presence                  OPTIONAL
}

MBMS-MSCHSchedulingInfo ::=         CHOICE {
    schedulingPeriod-32-Offset          INTEGER (0..31),
    schedulingPeriod-64-Offset          INTEGER (0..63),
    schedulingPeriod-128-Offset         INTEGER (0..127),
    schedulingPeriod-256-Offset         INTEGER (0..255),
    schedulingPeriod-512-Offset         INTEGER (0..511),
    schedulingPeriod-1024-Offset        INTEGER (0..1023)
}

MBMS-NeighbouringCellSCCPCH-r6 ::=  SEQUENCE {
    secondaryCCPCH-Info                 MBMS-CommonPhyChIdentity,
    secondaryCCPCHPwrOffsetDiff         MBMS-SCCPCHPwrOffsetDiff            OPTIONAL,
    layer1Combining                     CHOICE {
        fdd                                 SEQUENCE {
            softComb-TimingOffset               MBMS-SoftComb-TimingOffset,
            mbms-L1CombiningTransmTimeDiff      MBMS-L1CombiningTransmTimeDiff,
            mbms-L1CombiningSchedule            MBMS-L1CombiningSchedule    OPTIONAL
        },
        tdd                                 NULL
```

```
    }       OPTIONAL,
    mbms-L23Configuration               MBMS-L23Configuration
}

MBMS-NeighbouringCellSCCPCHList-r6 ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
                                    MBMS-NeighbouringCellSCCPCH-r6

MBMS-NI-CountPerFrame ::=           ENUMERATED { ni18, ni36, ni72, ni144 }

MBMS-NumberOfNeighbourCells-r6 ::=      INTEGER (0..32)

MBMS-PFLIndex ::=                   INTEGER (1..maxMBMS-Freq)

MBMS-PFLInfo ::=                    FrequencyInfo

MBMS-PhyChInformation-r6 ::=        SEQUENCE {
    mbms-CommonPhyChIdentity            MBMS-CommonPhyChIdentity,
    secondaryCCPCHInfo-MBMS             SecondaryCCPCHInfo-MBMS-r6
}

MBMS-PhyChInformationList-r6 ::=    SEQUENCE (SIZE (1..maxMBMS-CommonPhyCh)) OF
                                    MBMS-PhyChInformation-r6

MBMS-PL-ServiceRestrictInfo-r6 ::=  ENUMERATED { true }

MBMS-PreferredFreqRequest-r6 ::=    SEQUENCE {
    preferredFreqRequest                FrequencyInfo
}

MBMS-PreferredFrequencyInfo-r6 ::=  SEQUENCE {
    mbmsPreferredFrequency              INTEGER (1..maxMBMS-Freq)           OPTIONAL,
    layerConvergenceInformation         CHOICE {
        mbms-Qoffset                        MBMS-Qoffset,
        mbms-HCSoffset                      INTEGER (0..7)
    },
    mbms-PL-ServiceRestrictInfo         MBMS-PL-ServiceRestrictInfo-r6      OPTIONAL
}

MBMS-PreferredFrequencyList-r6 ::=  SEQUENCE (SIZE (1..maxMBMS-Freq)) OF
                                    MBMS-PreferredFrequencyInfo-r6

MBMS-PTMActivationTime-r6 ::=       INTEGER (0..2047)

MBMS-PTM-RBInformation-C ::=        SEQUENCE {
    rbInformation                       MBMS-CommonRBIdentity,
    shortTransmissionID                 MBMS-ShortTransmissionID,
    logicalChIdentity                   MBMS-LogicalChIdentity
}

MBMS-PTM-RBInformation-CList ::=    SEQUENCE (SIZE (1..maxRBperTrCh)) OF
                                    MBMS-PTM-RBInformation-C

MBMS-PTM-RBInformation-N ::=        SEQUENCE {
    shortTransmissionID                 MBMS-ShortTransmissionID,
    logicalChIdentity                   MBMS-LogicalChIdentity,
    layer1-CombiningStatus              BOOLEAN}

MBMS-PTM-RBInformation-NList ::=    SEQUENCE (SIZE (1..maxRBperTrCh)) OF
                                    MBMS-PTM-RBInformation-N

MBMS-Qoffset ::=                    ENUMERATED { q4, q8, q12, q16, q20, q30, q40, qInfinity }

MBMS-RequiredUEAction-Mod ::=       ENUMERATED {
                                        none,
                                        acquireCountingInfo,
                                        acquireCountingInfoPTM-RBsUnmodified,
                                        acquirePTM-RBInfo,
                                        requestPTPRB,
                                        releasePTM-RB }

MBMS-RequiredUEAction-UMod ::=      ENUMERATED {
                                        none,
                                        acquirePTM-RBInfo,
                                        requestPTPRB }

MBMS-SCCPCHIdentity ::=             INTEGER (1..maxSCCPCH)

MBMS-SCCPCHPwrOffsetDiff ::=        ENUMERATED { mcpo-minus6, mcpo-minus3, mcpo-plus3, mcpo-plus6 }
```

```
MBMS-SelectedServiceInfo ::=        SEQUENCE {
    status                              CHOICE {
        none                                NULL,
        some                                MBMS-SelectedServicesListFull
    }
}

MBMS-SelectedServicesListFull ::=   SEQUENCE (SIZE (1..maxMBMSservSelect)) OF
                                        MBMS-ServiceIdentity-r6

MBMS-SelectedServicesListShort ::=  SEQUENCE (SIZE (1..maxMBMSservSelect)) OF
                                        MBMS-ShortTransmissionID

MBMS-SelectedServicesShort ::=      SEQUENCE {
    mbms-SelectedServicesList           MBMS-SelectedServicesListShort,
    modificationPeriodIdentity          INTEGER (0..1)
}

MBMS-ServiceAccessInfo-r6 ::=       SEQUENCE {
    shortTransmissionID                 MBMS-ShortTransmissionID,
    accessprobabilityFactor-Idle        MBMS-AccessProbabilityFactor,
    accessprobabilityFactor-Connected   MBMS-AccessProbabilityFactor        OPTIONAL,
    mbms-ConnectedModeCountingScope     MBMS-ConnectedModeCountingScope
}

MBMS-ServiceAccessInfoList-r6 ::=   SEQUENCE (SIZE (1..maxMBMSservCount)) OF
                                        MBMS-ServiceAccessInfo-r6

MBMS-ServiceIdentity-r6 ::=         SEQUENCE {
    serviceIdentity                     OCTET STRING (SIZE (3)),
    plmn-Identity                       CHOICE {
        -- The 'sameAsMIB-PLMN-Id' choice refers to the 'PLMN Identity' (R99) in MIB.
        sameAsMIB-PLMN-Id                   NULL,
        other                               CHOICE {
            -- The 'sameAsMIB-MultiPLMN-Id' choice refers to one of the (1..5) PLMN Identities
            -- provided in the 'Multiple PLMN List' (REL-6) in MIB.
            sameAsMIB-MultiPLMN-Id              INTEGER (1..5),
            explicitPLMN-Id                     PLMN-Identity
        }
    }
}

MBMS-ServiceSchedulingInfo-r6 ::=   SEQUENCE {
    mbms-TransmissionIdentity           MBMS-TransmissionIdentity,
    mbms-ServiceTransmInfoList          MBMS-ServiceTransmInfoList          OPTIONAL,
    nextSchedulingperiod                INTEGER (0..31)
}

MBMS-ServiceSchedulingInfoList-r6 ::= SEQUENCE (SIZE (1..maxMBMSservSched)) OF
                                        MBMS-ServiceSchedulingInfo-r6

MBMS-ServiceTransmInfo ::=          SEQUENCE {
    -- Actual values (start, duration) = IE values * 4
    start                               INTEGER (0..255),
    duration                            INTEGER (1..256)
}

MBMS-ServiceTransmInfoList ::=      SEQUENCE (SIZE (1..maxMBMSTransmis)) OF
                                        MBMS-ServiceTransmInfo

MBMS-SessionIdentity ::=            OCTET STRING (SIZE (1))

MBMS-ShortTransmissionID ::=        INTEGER (1..maxMBMSservUnmodif)

MBMS-SIBType5-SCCPCH-r6 ::=         SEQUENCE {
    sccpchIdentity                      MBMS-SCCPCHIdentity,
    transpCHInformation                 MBMS-TrCHInformation-SIB5List
}

MBMS-SIBType5-SCCPCHList-r6 ::=     SEQUENCE (SIZE (1..maxSCCPCH)) OF
                                        MBMS-SIBType5-SCCPCH-r6

MBMS-SoftComb-TimingOffset ::=      ENUMERATED { ms0, ms10, ms20, ms40 }

MBMS-TCTF-Presence ::=              ENUMERATED { false }

MBMS-TimersAndCounters-r6 ::=       SEQUENCE {
```

```
    t-318                               T-318                               DEFAULT ms1000
}

MBMS-TransmissionIdentity ::=       SEQUENCE {
    mbms-ServiceIdentity                MBMS-ServiceIdentity-r6,
    mbms-SessionIdentity                MBMS-SessionIdentity                OPTIONAL
}

MBMS-TranspChInfoForCCTrCh-r6 ::=   SEQUENCE {
    commonCCTrChIdentity                MBMS-CommonCCTrChIdentity,
    transportFormatCombinationSet       TFCS
}


MBMS-TranspChInfoForEachCCTrCh-r6 ::= SEQUENCE (SIZE (1..maxMBMS-CommonCCTrCh)) OF
                                    MBMS-TranspChInfoForCCTrCh-r6

MBMS-TranspChInfoForEachTrCh-r6 ::= SEQUENCE (SIZE (1..maxMBMS-CommonTrCh)) OF
                                    MBMS-TranspChInfoForTrCh-r6

MBMS-TranspChInfoForTrCh-r6 ::=     SEQUENCE {
    commonTrChIdentity                  MBMS-CommonTrChIdentity,
    transportFormatSet                  TransportFormatSet
}

MBMS-TrCHInformation-Curr ::=       SEQUENCE {
    transpCh-Info                       MBMS-CommonTrChIdentity,
    rbInformation                       MBMS-PTM-RBInformation-CList        OPTIONAL,
    msch-ConfigurationInfo              MBMS-MSCH-ConfigurationInfo-r6      OPTIONAL
}

MBMS-TrCHInformation-CurrList ::=   SEQUENCE (SIZE (1..maxFACHPCH)) OF
                                    MBMS-TrCHInformation-Curr

MBMS-TrCHInformation-Neighb ::=     SEQUENCE {
    transpCh-Info                       MBMS-CommonTrChIdentity,
    transpCh-CombiningStatus            BOOLEAN,
    rbInformation                       MBMS-PTM-RBInformation-NList        OPTIONAL,
    msch-ConfigurationInfo              MBMS-MSCH-ConfigurationInfo-r6      OPTIONAL
}

MBMS-TrCHInformation-NeighbList ::= SEQUENCE (SIZE (1..maxFACHPCH)) OF
                                    MBMS-TrCHInformation-Neighb

MBMS-TrCHInformation-SIB5 ::=       SEQUENCE {
    transpCh-Identity                   INTEGER (1..maxFACHPCH),
    rbInformation                       MBMS-PTM-RBInformation-CList        OPTIONAL,
    msch-ConfigurationInfo              MBMS-MSCH-ConfigurationInfo-r6      OPTIONAL
}

MBMS-TrCHInformation-SIB5List ::=   SEQUENCE (SIZE (1..maxFACHPCH)) OF
                                    MBMS-TrCHInformation-SIB5

MBMS-UnmodifiedService-r6 ::=       SEQUENCE {
    mbms-TransmissionIdentity           MBMS-TransmissionIdentity,
    mbms-RequiredUEAction               MBMS-RequiredUEAction-UMod,
    mbms-PreferredFrequency             MBMS-PFLIndex                       OPTIONAL
}

MBMS-UnmodifiedServiceList-r6 ::=   SEQUENCE (SIZE (1..maxMBMSservUnmodif)) OF
                                    MBMS-UnmodifiedService-r6

END
```

11.4 Constant definitions

```
Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

hiPDSCHidentities           INTEGER ::= 64
hiPUSCHidentities           INTEGER ::= 64
hiRM                        INTEGER ::= 256
maxAC                       INTEGER ::= 16
maxAdditionalMeas           INTEGER ::= 4
maxASC                      INTEGER ::= 8
maxASCmap                   INTEGER ::= 7
```

```
maxASCpersist               INTEGER ::= 6
maxCCTrCH                   INTEGER ::= 8
maxCellMeas                 INTEGER ::= 32
maxCellMeas-1               INTEGER ::= 31
maxCNdomains                INTEGER ::= 4
maxCPCHsets                 INTEGER ::= 16
maxDPCH-DLchan              INTEGER ::= 8
maxDPDCH-UL                 INTEGER ::= 6
maxDRACclasses              INTEGER ::= 8
maxE-DCHMACdFlow            INTEGER ::= 8
maxE-DCHMACdFlow-1          INTEGER ::= 7
maxEDCHRL                   INTEGER ::= 4
maxFACHPCH                  INTEGER ::= 8
maxFreq                     INTEGER ::= 8
maxFreqBandsFDD             INTEGER ::= 8
maxFreqBandsFDD-ext         INTEGER ::= 15  -- maxFreqBandsFDD-ext ::= 22 - (maxFreqBandsFDD - 1)
maxFreqBandsTDD             INTEGER ::= 4
maxFreqBandsGSM             INTEGER ::= 16
maxGERAN-SI                 INTEGER ::= 8
maxGSMTargetCells           INTEGER ::= 32
maxHProcesses               INTEGER ::= 8
maxHSDSCHTBIndex            INTEGER ::= 64
maxHSDSCHTBIndex-tdd384     INTEGER ::= 512
maxHSSCCHs                  INTEGER ::= 4
maxInterSysMessages         INTEGER ::= 4
maxLoCHperRLC               INTEGER ::= 2
maxMAC-d-PDUsizes           INTEGER ::= 8
maxMBMS-CommonCCTrCh        INTEGER ::= 32
maxMBMS-CommonPhyCh         INTEGER ::= 32
maxMBMS-CommonRB            INTEGER ::= 32
maxMBMS-CommonTrCh          INTEGER ::= 32
maxMBMS-Freq                INTEGER ::= 4
maxMBMS-L1CP                INTEGER ::= 4
maxMBMSservCount            INTEGER ::= 8
maxMBMSservModif            INTEGER ::= 32
maxMBMSservSched            INTEGER ::= 16
maxMBMSservSelect           INTEGER ::= 8
maxMBMSservUnmodif          INTEGER ::= 64
maxMBMSTransmis             INTEGER ::= 4
maxMeasEvent                INTEGER ::= 8
maxMeasIntervals            INTEGER ::= 3
maxMeasParEvent             INTEGER ::= 2
maxNumCDMA2000Freqs         INTEGER ::=  8
maxNumE-AGCH                INTEGER ::= 8
maxNumGSMFreqRanges         INTEGER ::= 32
maxNumFDDFreqs              INTEGER ::=  8
maxNumTDDFreqs              INTEGER ::=  8
maxNoOfMeas                 INTEGER ::= 16
maxOtherRAT                 INTEGER ::= 15
maxOtherRAT-16              INTEGER ::= 16
maxPage1                    INTEGER ::= 8
maxPCPCH-APsig              INTEGER ::= 16
maxPCPCH-APsubCh            INTEGER ::= 12
maxPCPCH-CDsig              INTEGER ::= 16
maxPCPCH-CDsubCh            INTEGER ::= 12
maxPCPCH-SF                 INTEGER ::= 7
maxPCPCHs                   INTEGER ::= 64
maxPDCPAlgoType             INTEGER ::= 8
maxPDSCH                    INTEGER ::= 8
maxPDSCH-TFCIgroups         INTEGER ::= 256
maxPRACH                    INTEGER ::= 16
maxPRACH-FPACH              INTEGER ::= 8
maxPredefConfig             INTEGER ::= 16
maxPUSCH                    INTEGER ::= 8
maxQueueIDs                 INTEGER ::= 8
maxRABsetup                 INTEGER ::= 16
maxRAT                      INTEGER ::= 16
maxRB                       INTEGER ::= 32
maxRBallRABs                INTEGER ::= 27
maxRBMuxOptions             INTEGER ::= 8
maxRBperRAB                 INTEGER ::= 8
maxRBperTrCh                INTEGER ::= 16
maxReportedGSMCells         INTEGER ::= 8
maxRL                       INTEGER ::= 8
maxRL-1                     INTEGER ::= 7
maxRLCPDUsizePerLogChan     INTEGER ::= 32
maxRFC3095-CID              INTEGER ::= 16384
maxROHC-PacketSizes-r4      INTEGER ::= 16
```

```
maxROHC-Profile-r4          INTEGER ::= 8
maxSat                      INTEGER ::= 16
maxSCCPCH                   INTEGER ::= 16
maxSIB                      INTEGER ::= 32
maxSIB-FACH                 INTEGER ::= 8
maxSIBperMsg                INTEGER ::= 16
maxSRBsetup                 INTEGER ::= 8
maxSystemCapability         INTEGER ::= 16
maxTF                       INTEGER ::= 32
maxTF-CPCH                  INTEGER ::= 16
maxTFC                      INTEGER ::= 1024
maxTFCsub                   INTEGER ::= 1024
maxTFCI-2-Combs             INTEGER ::= 512
maxTGPS                     INTEGER ::= 6
maxTrCH                     INTEGER ::= 32
-- maxTrCHpreconf should be 16 but has been set to 32 for compatibility
maxTrCHpreconf              INTEGER ::= 32
maxTS                       INTEGER ::= 14
maxTS-1                     INTEGER ::= 13
maxTS-2                     INTEGER ::= 12
maxTS-LCR                   INTEGER ::= 6
maxTS-LCR-1                 INTEGER ::= 5
maxURA                      INTEGER ::= 8
maxURNTI-Group              INTEGER ::= 8

END
```

11.5 RRC information between network nodes

```
Internode-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS

    HandoverToUTRANCommand,
    MeasurementReport,
    PhysicalChannelReconfiguration,
    RadioBearerReconfiguration,
    RadioBearerRelease,
    RadioBearerSetup,
    RRCConnectionSetupComplete-r3-add-ext-IEs,
    RRC-FailureInfo,
    TransportChannelReconfiguration,
    UECapabilityInformation-r3-add-ext-IEs
FROM PDU-definitions

-- Core Network IEs :
    CN-DomainIdentity,
    CN-DomainInformationList,
    CN-DomainInformationListFull,
    CN-DRX-CycleLengthCoefficient,
    NAS-SystemInformationGSM-MAP,
-- UTRAN Mobility IEs :
    CellIdentity,
    URA-Identity,
-- User Equipment IEs :
    AccessStratumReleaseIndicator,
    C-RNTI,
    ChipRateCapability,
    DL-CapabilityWithSimultaneousHS-DSCHConfig,
    DL-PhysChCapabilityFDD-v380ext,
    DL-PhysChCapabilityTDD,
    DL-PhysChCapabilityTDD-LCR-r4,
    GSM-Measurements,
    HSDSCH-physical-layer-category,
    FailureCauseWithProtErr,
    MaxHcContextSpace,
    MaximumAM-EntityNumberRLC-Cap,
    MaximumRLC-WindowSize,
    MaxNoPhysChBitsReceived,
    MaxNoDPDCH-BitsTransmitted,
    MaxPhysChPerFrame,
    MaxPhysChPerSubFrame-r4,
    MaxPhysChPerTS,
    MaxROHC-ContextSessions-r4,
    MaxTS-PerFrame,
```

```
    MaxTS-PerSubFrame-r4,
    MinimumSF-DL,
    MultiModeCapability,
    MultiRAT-Capability,
    NetworkAssistedGPS-Supported,
    PhysicalChannelCapability-edch-r6,
    PhysicalChannelCapability-r7,
    RadioFrequencyBandTDDList,
    RF-Capability-r7,
    RLC-Capability,
    RRC-MessageSequenceNumber,
    SecurityCapability,
    SimultaneousSCCPCH-DPCH-Reception,
    STARTList,
    STARTSingle,
    START-Value,
    SupportOfDedicatedPilotsForChEstimation,
    TransportChannelCapability,
    TxRxFrequencySeparation,
    U-RNTI,
    UE-CapabilityContainer-IEs,
    UE-MultiModeRAT-Capability,
    UE-PowerClassExt,
    UE-RadioAccessCapabBandFDDList,
    UE-RadioAccessCapabBandFDDList2,
    UE-RadioAccessCapabBandFDDList-ext,
    UE-RadioAccessCapability,
    UE-RadioAccessCapability-v370ext,
    UE-RadioAccessCapability-v380ext,
    UE-RadioAccessCapability-v3a0ext,
    UE-RadioAccessCapability-v3g0ext,
    UE-RadioAccessCapability-v4b0ext,
    UE-RadioAccessCapability-v590ext,
    UE-RadioAccessCapability-v5c0ext,
    UE-RadioAccessCapability-v7xyext,
    UL-PhysChCapabilityFDD,
    UL-PhysChCapabilityFDD-r6,
    UL-PhysChCapabilityTDD,
    UL-PhysChCapabilityTDD-LCR-r4,
-- Radio Bearer IEs :
    PredefinedConfigStatusList,
    PredefinedConfigValueTag,
    RAB-InformationSetupList,
    RAB-InformationSetupList-r4,
    RAB-InformationSetupList-r5,
    RAB-InformationSetupList-r6-ext,
    RAB-InformationSetupList-r6,
    RAB-InformationSetupList-v6b0ext,
    RAB-InformationSetupList-r7,
    RB-Identity,
    SRB-InformationSetupList,
    SRB-InformationSetupList-r5,
    SRB-InformationSetupList-r6,
-- Transport Channel IEs :
    CPCH-SetID,
    DL-CommonTransChInfo,
    DL-CommonTransChInfo-r4,
    DL-AddReconfTransChInfoList,
    DL-AddReconfTransChInfoList-r4,
    DL-AddReconfTransChInfoList-r5,
    DRAC-StaticInformationList,
    UL-CommonTransChInfo,
    UL-CommonTransChInfo-r4,
    UL-AddReconfTransChInfoList,
    UL-AddReconfTransChInfoList-r6,
    UL-AddReconfTransChInfoList-r7,
-- Physical Channel IEs :
    PrimaryCPICH-Info,
    TPC-CombinationIndex,
    ScramblingCodeChange,
    TGCFN,
    TGPSI,
    TGPS-ConfigurationParams,
-- Measurement IEs :
    Event1j-r6,
    Hysteresis,
    Inter-FreqEventCriteriaList-v590ext,
    Intra-FreqEventCriteriaList-v590ext,
```

```
    IntraFreqEvent-1d-r5,
    IntraFreqReportingCriteria-1b-r5,
    InterRATCellInfoIndication,
    MeasuredResultsOnRACHinterFreq,
    MeasurementIdentity,
    MeasurementReportingMode,
    MeasurementType,
    MeasurementType-r4,
    MeasurementType-r6,
    AdditionalMeasurementID-List,
    PositionEstimate,
    ReportingCellStatus,
    TimeToTrigger,
-- MBMS IEs :
    MBMS-JoinedInformation-r6,
    MBMS-SelectedServiceInfo,
-- Other IEs :
    GERANIu-RadioAccessCapability,
    GSM-MS-RadioAccessCapability,
    InterRAT-UE-RadioAccessCapabilityList,
    InterRAT-UE-RadioAccessCapability-v590ext,
    InterRAT-UE-RadioAccessCapability-v690ext,
    UESpecificBehaviourInformationlidle,
    UESpecificBehaviourInformationlinterRAT

FROM InformationElements

    maxCNdomains,
    maxNoOfMeas,

    maxRB,
    maxRBallRABs,
    maxRFC3095-CID,
    maxSRBsetup,
    maxRL,
    maxTGPS
FROM Constant-definitions
;

-- Part 1: Class definitions similar to what has been defined in 11.1 for RRC messages
-- Information that is tranferred in the same direction and across the same path is grouped

-- ************************************************
--
-- RRC information, to target RNC
--
-- ************************************************
-- RRC Information to target RNC sent either from source RNC or from another RAT

ToTargetRNC-Container ::= CHOICE {
    interRATHandoverInfo                InterRATHandoverInfoWithInterRATCapabilities-r3,
    srncRelocation                      SRNC-RelocationInfo-r3,
    rfc3095-ContextInfo                 RFC3095-ContextInfo-r5,
    extension                           NULL
}

-- ************************************************
--
-- RRC information, target RNC to source RNC
--
-- ************************************************


TargetRNC-ToSourceRNC-Container ::= CHOICE {
    radioBearerSetup                    RadioBearerSetup,
    radioBearerReconfiguration          RadioBearerReconfiguration,
    radioBearerRelease                  RadioBearerRelease,
    transportChannelReconfiguration     TransportChannelReconfiguration,
    physicalChannelReconfiguration      PhysicalChannelReconfiguration,
    rrc-FailureInfo                     RRC-FailureInfo,
    -- IE dl-DCCHmessage consists of an octet string that includes the IE DL-DCCH-Message
    dL-DCCHmessage                      OCTET STRING,
    extension                           NULL
}

-- Part 2: Container definitions, similar to the PDU definitions in 11.2 for RRC messages
-- In alphabetical order
```

```
-- **************************************************
--
-- Handover to UTRAN information
--
-- **************************************************

InterRATHandoverInfoWithInterRATCapabilities-r3 ::= CHOICE {
    r3                              SEQUENCE {
        -- IE InterRATHandoverInfoWithInterRATCapabilities-r3-IEs also
        -- includes non critical extensions
        interRATHandoverInfo-r3         InterRATHandoverInfoWithInterRATCapabilities-r3-IEs,
        v390NonCriticalExtensions       SEQUENCE {
            interRATHandoverInfoWithInterRATCapabilities-v390ext
                                        InterRATHandoverInfoWithInterRATCapabilities-v390ext-IEs,
            -- Reserved for future non critical extension
            v690NonCriticalExtensions       SEQUENCE {
                interRATHandoverInfoWithInterRATCapabilities-v690ext
                                        InterRATHandoverInfoWithInterRATCapabilities-v690ext-IEs,
                nonCriticalExtensions           SEQUENCE {} OPTIONAL
            }       OPTIONAL
        }       OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

InterRATHandoverInfoWithInterRATCapabilities-r3-IEs ::=     SEQUENCE {
        -- The order of the IEs may not reflect the tabular format
        --  but has been chosen to simplify the handling of the information in the BSC
    --  Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList   OPTIONAL,
        -- interRATHandoverInfo, Octet string is used to obtain 8 bit length field prior to
        -- actual information.  This makes it possible for BSS to transparently handle information
        -- received via GSM air interface even when it includes non critical extensions.
        -- The octet string shall include the InterRATHandoverInfo information
        -- The BSS can re-use the 44.018 length field received from the MS
        interRATHandoverInfo            OCTET STRING (SIZE (0..255))
}

InterRATHandoverInfoWithInterRATCapabilities-v390ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        failureCauseWithProtErr             FailureCauseWithProtErr                 OPTIONAL
}

InterRATHandoverInfoWithInterRATCapabilities-v690ext-IEs ::= SEQUENCE {
    -- Other IEs
        ue-RATSpecificCapability-v690ext    InterRAT-UE-RadioAccessCapability-v690ext   OPTIONAL
}

-- **************************************************
--
-- RFC3095 context, source RNC to target RNC
--
-- **************************************************

RFC3095-ContextInfo-r5 ::= CHOICE {
    r5                              SEQUENCE {
        rFC3095-ContextInfoList-r5      RFC3095-ContextInfoList-r5,
        -- Reserved for future non critical extension
        nonCriticalExtensions           SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

RFC3095-ContextInfoList-r5 ::=      SEQUENCE (SIZE (1..maxRBallRABs)) OF
                                        RFC3095-ContextInfo


-- **************************************************
--
-- SRNC Relocation information
--
-- **************************************************

SRNC-RelocationInfo-r3 ::= CHOICE {
    r3                              SEQUENCE {
        sRNC-RelocationInfo-r3          SRNC-RelocationInfo-r3-IEs,
        v380NonCriticalExtensions           SEQUENCE {
```

```
            sRNC-RelocationInfo-v380ext SRNC-RelocationInfo-v380ext-IEs,
            -- Reserved for future non critical extension
            v390NonCriticalExtensions           SEQUENCE {
                sRNC-RelocationInfo-v390ext         SRNC-RelocationInfo-v390ext-IEs,
                v3a0NonCriticalExtensions           SEQUENCE {
                    sRNC-RelocationInfo-v3a0ext         SRNC-RelocationInfo-v3a0ext-IEs,
                    v3b0NonCriticalExtensions           SEQUENCE {
                        sRNC-RelocationInfo-v3b0ext         SRNC-RelocationInfo-v3b0ext-IEs,
                        v3c0NonCriticalExtensions           SEQUENCE {
                            sRNC-RelocationInfo-v3c0ext         SRNC-RelocationInfo-v3c0ext-IEs,
                            laterNonCriticalExtensions          SEQUENCE {
                                sRNC-RelocationInfo-v3d0ext         SRNC-RelocationInfo-v3d0ext-IEs,
                                -- Container for additional R99 extensions
                                sRNC-RelocationInfo-r3-add-ext      BIT STRING
                                                    (CONTAINING SRNC-RelocationInfo-v3h0ext-IEs)      OPTIONAL,
                                v3g0NonCriticalExtensions           SEQUENCE {
                                    sRNC-RelocationInfo-v3g0ext         SRNC-RelocationInfo-v3g0ext-IEs,
                                    v4b0NonCriticalExtensions           SEQUENCE {
                                        sRNC-RelocationInfo-v4b0ext         SRNC-RelocationInfo-v4b0ext-IEs,
                                        v590NonCriticalExtensions           SEQUENCE {
                                            sRNC-RelocationInfo-v590ext
                                                                                SRNC-RelocationInfo-v590ext-IEs,
                                            v5a0NonCriticalExtensions           SEQUENCE {
                                                sRNC-RelocationInfo-v5a0ext
                                                                                SRNC-RelocationInfo-v5a0ext-IEs,
                                                v5b0NonCriticalExtensions           SEQUENCE {
                                                    sRNC-RelocationInfo-v5b0ext
                                                                                SRNC-RelocationInfo-v5b0ext-IEs,
                                                    v5c0NonCriticalExtensions           SEQUENCE {
                                                        sRNC-RelocationInfo-v5c0ext
                                                                                SRNC-RelocationInfo-v5c0ext-IEs,
                                                        v690NonCriticalExtensions       SEQUENCE {
                                                            sRNC-RelocationInfo-v690ext
                                                                                SRNC-RelocationInfo-v690ext-IEs,
                                                            v6b0NonCriticalExtensions       SEQUENCE {
                                                                sRNC-RelocationInfo-v6b0ext
                                                                                SRNC-RelocationInfo-v6b0ext-IEs,
                                                                v7xyNonCriticalExtensions   SEQUENCE {
                                                                    sRNC-RelocationInfo-v7xyext
                                                                                SRNC-RelocationInfo-v7xyext-IEs,
                                                                    -- Reserved for future non critical
                                                                    -- extension
                                                                    nonCriticalExtensions
                                                                                SEQUENCE {}  OPTIONAL
                                                                }       OPTIONAL
                                                            }       OPTIONAL
                                                        }       OPTIONAL
                                                    }       OPTIONAL
                                                }       OPTIONAL
                                            }       OPTIONAL
                                        }       OPTIONAL
                                    }       OPTIONAL
                                }       OPTIONAL
                            }       OPTIONAL
                        }       OPTIONAL
                    }       OPTIONAL
                }       OPTIONAL
            }       OPTIONAL
        },
        later-than-r3                   CHOICE {
            r4                              SEQUENCE {
                sRNC-RelocationInfo-r4          SRNC-RelocationInfo-r4-IEs,
                v4d0NonCriticalExtensions       SEQUENCE {
                    sRNC-RelocationInfo-v4d0ext     SRNC-RelocationInfo-v4d0ext-IEs,
                    -- Container for adding non critical extensions after freezing REL-5
                    sRNC-RelocationInfo-r4-add-ext      BIT STRING      OPTIONAL,
                    v590NonCriticalExtensions           SEQUENCE {
                        sRNC-RelocationInfo-v590ext         SRNC-RelocationInfo-v590ext-IEs,
                        v5a0NonCriticalExtensions           SEQUENCE {
                            sRNC-RelocationInfo-v5a0ext         SRNC-RelocationInfo-v5a0ext-IEs,
                            v5b0NonCriticalExtensions           SEQUENCE {
                                sRNC-RelocationInfo-v5b0ext         SRNC-RelocationInfo-v5b0ext-IEs,
                                v5c0NonCriticalExtensions           SEQUENCE {
                                    sRNC-RelocationInfo-v5c0ext         SRNC-RelocationInfo-v5c0ext-IEs,
                                    v690NonCriticalExtensions           SEQUENCE {
                                        sRNC-RelocationInfo-v690ext     SRNC-RelocationInfo-v690ext-IEs,
                                        v6b0NonCriticalExtensions           SEQUENCE {
```

```
                                        sRNC-RelocationInfo-v6b0ext
                                                                SRNC-RelocationInfo-v6b0ext-IEs,
                                        v7xyNonCriticalExtensions           SEQUENCE {
                                            sRNC-RelocationInfo-v7xyext
                                                                SRNC-RelocationInfo-v7xyext-IEs,
                                                nonCriticalExtensions           SEQUENCE {} OPTIONAL
                                        }   OPTIONAL
                                    }   OPTIONAL
                                }   OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                }   OPTIONAL
            },
            criticalExtensions              CHOICE {
                r5                              SEQUENCE {
                    sRNC-RelocationInfo-r5          SRNC-RelocationInfo-r5-IEs,
                    sRNC-RelocationInfo-r5-add-ext  BIT STRING      OPTIONAL,
                    v5a0NonCriticalExtensions       SEQUENCE {
                        sRNC-RelocationInfo-v5a0ext     SRNC-RelocationInfo-v5a0ext-IEs,
                        v5b0NonCriticalExtensions       SEQUENCE {
                            sRNC-RelocationInfo-v5b0ext     SRNC-RelocationInfo-v5b0ext-IEs,
                            v5c0NonCriticalExtensions           SEQUENCE {
                                sRNC-RelocationInfo-v5c0ext         SRNC-RelocationInfo-v5c0ext-IEs,
                                v690NonCriticalExtensions           SEQUENCE {
                                    sRNC-RelocationInfo-v690ext         SRNC-RelocationInfo-v690ext-IEs,
                                    v6b0NonCriticalExtensions           SEQUENCE {
                                        sRNC-RelocationInfo-v6b0ext     SRNC-RelocationInfo-v6b0ext-IEs,
                                        v7xyNonCriticalExtensions       SEQUENCE {
                                            sRNC-RelocationInfo-v7xyext
                                                                SRNC-RelocationInfo-v7xyext-IEs,
                                            nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                                        }   OPTIONAL
                                    }   OPTIONAL
                                }   OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    }   OPTIONAL
                },
                criticalExtensions              CHOICE {
                    r6                              SEQUENCE {
                        sRNC-RelocationInfo-r6          SRNC-RelocationInfo-r6-IEs,
                        sRNC-RelocationInfo-r6-add-ext  BIT STRING      OPTIONAL,
                        v6b0NonCriticalExtensions       SEQUENCE {
                            sRNC-RelocationInfo-v6b0ext     SRNC-RelocationInfo-v6b0ext-IEs,
                            v7xyNonCriticalExtensions       SEQUENCE {
                                sRNC-RelocationInfo-v7xyext     SRNC-RelocationInfo-v7xyext-IEs,
                                nonCriticalExtensions           SEQUENCE {}     OPTIONAL
                            }   OPTIONAL
                        }   OPTIONAL
                    },
                    criticalExtensions              CHOICE {
                        r7                              SEQUENCE {
                            sRNC-RelocationInfo-r7          SRNC-RelocationInfo-r7-IEs,
                            sRNC-RelocationInfo-r7-add-ext  BIT STRING      OPTIONAL,
                            nonCriticalExtensions           SEQUENCE {} OPTIONAL
                        },
                        criticalExtensions              SEQUENCE {}
                    }
                }
            }
        }
    }
}

SRNC-RelocationInfo-r3-IEs ::=      SEQUENCE {
    -- Non-RRC IEs
        stateOfRRC                      StateOfRRC,
        stateOfRRC-Procedure            StateOfRRC-Procedure,
    -- Ciphering related information IEs
    -- If the extension v380 is included use the extension for the ciphering status per CN domain
        cipheringStatus                 CipheringStatus,
        -- If ciphering status is started and the IE latestConfiguredCN-Domain should be included,
        -- the IE cn-DomainIdentity (in SRNC-RelocationInfo-v380ext-IEs) shall be used instead.
        calculationTimeForCiphering     CalculationTimeForCiphering         OPTIONAL,
        -- The order of occurrence in the IE cipheringInfoPerRB-List is the
        -- same as the RBs in SRB-InformationSetupList in RAB-InformationSetupList.
        -- The signalling RBs are supposed to be listed
```

```
        -- first. Only UM and AM RBs that are ciphered are listed here
        cipheringInfoPerRB-List         CipheringInfoPerRB-List             OPTIONAL,
        count-C-List                    COUNT-C-List                        OPTIONAL,
        integrityProtectionStatus       IntegrityProtectionStatus,
        -- In the IE srb-SpecificIntegrityProtInfo, the first information listed corresponds to
      -- signalling radio bearer RB0 and after the order of occurrence is the same as the SRBs in
     -- SRB-InformationSetupList
        -- The target RNC may ignore the IE srb-SpecificIntegrityProtInfo if the
        -- IE integrityProtectionStatus has the value "not started".
        srb-SpecificIntegrityProtInfo   SRB-SpecificIntegrityProtInfoList,
        implementationSpecificParams    ImplementationSpecificParams        OPTIONAL,
    -- User equipment IEs
        u-RNTI                          U-RNTI,
        c-RNTI                          C-RNTI                              OPTIONAL,
        ue-RadioAccessCapability        UE-RadioAccessCapability,
        ue-Positioning-LastKnownPos     UE-Positioning-LastKnownPos         OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList   OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
        cn-DomainInformationList        CN-DomainInformationList            OPTIONAL,
    -- Measurement IEs
        ongoingMeasRepList              OngoingMeasRepList                  OPTIONAL,
    -- Radio bearer IEs
        predefinedConfigStatusList      PredefinedConfigStatusList,
        srb-InformationList             SRB-InformationSetupList,
        rab-InformationList             RAB-InformationSetupList            OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo                OPTIONAL,
        ul-TransChInfoList              UL-AddReconfTransChInfoList         OPTIONAL,
        modeSpecificInfo                CHOICE {
            fdd                             SEQUENCE {
                -- dummy and dummy2 are not used in this version of the specification, they should
                -- not be sent and if received they should be ignored.
                dummy                           CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        },
        dl-CommonTransChInfo            DL-CommonTransChInfo                OPTIONAL,
        dl-TransChInfoList              DL-AddReconfTransChInfoList         OPTIONAL,
    -- Measurement report
        measurementReport               MeasurementReport                   OPTIONAL
}

SRNC-RelocationInfo-v380ext-IEs ::= SEQUENCE {
    -- Ciphering related information IEs
        -- In the SRNC-RelocationInfo-r3-IEs, the IE 'cn-DomainIdentity' is used to represent the
        -- IE 'Latest configured CN domain' in the tabular.
        cn-DomainIdentity               CN-DomainIdentity,
        cipheringStatusList             CipheringStatusList
}

SRNC-RelocationInfo-v390ext-IEs ::= SEQUENCE {
        cn-DomainInformationList-v390ext    CN-DomainInformationList-v390ext        OPTIONAL,
        ue-RadioAccessCapability-v370ext    UE-RadioAccessCapability-v370ext        OPTIONAL,
        ue-RadioAccessCapability-v380ext    UE-RadioAccessCapability-v380ext        OPTIONAL,
        dl-PhysChCapabilityFDD-v380ext      DL-PhysChCapabilityFDD-v380ext,
        failureCauseWithProtErr             FailureCauseWithProtErr                 OPTIONAL
}

SRNC-RelocationInfo-v3a0ext-IEs ::= SEQUENCE {
        cipheringInfoForSRB1-v3a0ext        CipheringInfoPerRB-List-v3a0ext,
        ue-RadioAccessCapability-v3a0ext    UE-RadioAccessCapability-v3a0ext        OPTIONAL,
        -- cn-domain identity for IE startValueForCiphering-v3a0ext is specified
        -- in subsequent extension (SRNC-RelocationInfo-v3b0ext-IEs)
        startValueForCiphering-v3a0ext      START-Value
}

SRNC-RelocationInfo-v3b0ext-IEs ::= SEQUENCE {
        -- cn-domain identity for IE startValueForCiphering-v3a0ext included in previous extension
        cn-DomainIdentity               CN-DomainIdentity,
        -- the IE startValueForCiphering-v3b0ext contains the start values for each CN Domain. The
        -- value of start indicated by the IE startValueForCiphering-v3a0ext should be set to the
        -- same value as the start-Value for the corresponding cn-DomainIdentity in the IE
        -- startValueForCiphering-v3b0ext
```

```
        startValueForCiphering-v3b0ext      STARTList2                                  OPTIONAL
}

SRNC-RelocationInfo-v3c0ext-IEs ::= SEQUENCE {
        -- IE rb-IdentityForHOMessage includes the identity of the RB used by the source SRNC
        -- to send the message contained in the IE "TargetRNC-ToSourceRNC-Container".
        -- Only included if type is "UE involved"
        rb-IdentityForHOMessage             RB-Identity         OPTIONAL
}

SRNC-RelocationInfo-v3d0ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        uESpecificBehaviourInformationIidle     UESpecificBehaviourInformationIidle     OPTIONAL,
        uESpecificBehaviourInformationInterRAT      UESpecificBehaviourInformationInterRAT
    OPTIONAL
}

SRNC-RelocationInfo-v3g0ext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v3g0ext    UE-RadioAccessCapability-v3g0ext        OPTIONAL
}

SRNC-RelocationInfo-v3h0ext-IEs ::= SEQUENCE {
        tpc-CombinationInfoList         TPC-CombinationInfoList     OPTIONAL,
        nonCriticalExtension                SEQUENCE {}             OPTIONAL
}

SRNC-RelocationInfo-v4d0ext-IEs ::= SEQUENCE {
        tpc-CombinationInfoList     TPC-CombinationInfoList     OPTIONAL
}

TPC-CombinationInfoList ::= SEQUENCE (SIZE (1..maxRL)) OF
        TPC-Combination-Info

STARTList2 ::=                      SEQUENCE (SIZE (2..maxCNdomains)) OF
                                        STARTSingle

SRNC-RelocationInfo-v4b0ext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v4b0ext    UE-RadioAccessCapability-v4b0ext        OPTIONAL
}

SRNC-RelocationInfo-v590ext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v590ext    UE-RadioAccessCapability-v590ext        OPTIONAL,
        ue-RATSpecificCapability-v590ext    InterRAT-UE-RadioAccessCapability-v590ext   OPTIONAL
}

SRNC-RelocationInfo-v5a0ext-IEs ::= SEQUENCE {
        storedCompressedModeInfo        StoredCompressedModeInfo    OPTIONAL
}

SRNC-RelocationInfo-v5b0ext-IEs ::= SEQUENCE {
    interRATCellInfoIndication          InterRATCellInfoIndication          OPTIONAL
}

SRNC-RelocationInfo-v5c0ext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v5c0ext    UE-RadioAccessCapability-v5c0ext        OPTIONAL
}

SRNC-RelocationInfo-v7xyext-IEs ::= SEQUENCE {
        ue-RadioAccessCapability-v7xyext    UE-RadioAccessCapability-v7xyext        OPTIONAL
}

CipheringInfoPerRB-List-v3a0ext ::= SEQUENCE {
        dl-UM-SN                        BIT STRING (SIZE (7))
}

CipheringStatusList ::=         SEQUENCE (SIZE (1..maxCNdomains)) OF
                                        CipheringStatusCNdomain

CipheringStatusCNdomain ::=             SEQUENCE {
        cn-DomainIdentity               CN-DomainIdentity,
        cipheringStatus                 CipheringStatus
}

CodeChangeStatusList ::= SEQUENCE (SIZE (1..maxRL)) OF
        CodeChangeStatus

CodeChangeStatus ::= SEQUENCE {
        primaryCPICH-Info                   PrimaryCPICH-Info,
```

```
        scramblingCodeChange                ScramblingCodeChange
}

StoredCompressedModeInfo ::= SEQUENCE {
        storedTGP-SequenceList      StoredTGP-SequenceList,
        codeChangeStatusList        CodeChangeStatusList    OPTIONAL
}

StoredTGP-SequenceList ::=          SEQUENCE (SIZE (1..maxTGPS)) OF
                                        StoredTGP-Sequence

StoredTGP-Sequence ::=              SEQUENCE {
    tgpsi                               TGPSI,
    current-tgps-Status                 CHOICE {
        active                              SEQUENCE {
            tgcfn                               TGCFN
        },
        inactive                            NULL
    },
    tgps-ConfigurationParams            TGPS-ConfigurationParams            OPTIONAL
}

SRNC-RelocationInfo-r4-IEs ::=          SEQUENCE {
    -- Non-RRC IEs
        -- IE rb-IdentityForHOMessage includes the identity of the RB used by the source SRNC
        -- to send the message contained in the IE "TargetRNC-ToSourceRNC-Container".
        -- Only included if type is "UE involved"
        rb-IdentityForHOMessage         RB-Identity                         OPTIONAL,
        stateOfRRC                      StateOfRRC,
        stateOfRRC-Procedure            StateOfRRC-Procedure,
    -- Ciphering related information IEs
        cipheringStatusList             CipheringStatusList-r4,
        latestConfiguredCN-Domain       CN-DomainIdentity,
        calculationTimeForCiphering     CalculationTimeForCiphering         OPTIONAL,
        count-C-List                    COUNT-C-List                        OPTIONAL,
        cipheringInfoPerRB-List         CipheringInfoPerRB-List-r4          OPTIONAL,
    -- Integrity protection related information IEs
        integrityProtectionStatus       IntegrityProtectionStatus,
        -- The target RNC may ignore the IE srb-SpecificIntegrityProtInfo if the
        -- IE integrityProtectionStatus has the value "not started".
        srb-SpecificIntegrityProtInfo   SRB-SpecificIntegrityProtInfoList,
        implementationSpecificParams    ImplementationSpecificParams        OPTIONAL,
    -- User equipment IEs
        u-RNTI                          U-RNTI,
        c-RNTI                          C-RNTI                              OPTIONAL,
        ue-RadioAccessCapability        UE-RadioAccessCapability-r4,
        ue-RadioAccessCapability-ext    UE-RadioAccessCapabBandFDDList      OPTIONAL,
        ue-Positioning-LastKnownPos     UE-Positioning-LastKnownPos         OPTIONAL,
        uESpecificBehaviourInformation1idle     UESpecificBehaviourInformation1idle     OPTIONAL,
        uESpecificBehaviourInformation1interRAT     UESpecificBehaviourInformation1interRAT
    OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList   OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
        cn-DomainInformationList        CN-DomainInformationListFull        OPTIONAL,
    -- Measurement IEs
        ongoingMeasRepList              OngoingMeasRepList-r4               OPTIONAL,
    -- Radio bearer IEs
        predefinedConfigStatusList      PredefinedConfigStatusList,
        srb-InformationList             SRB-InformationSetupList,
        rab-InformationList             RAB-InformationSetupList-r4         OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-TransChInfoList              UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-TransChInfoList              DL-AddReconfTransChInfoList-r4      OPTIONAL,
```

```
    -- Measurement report
        measurementReport               MeasurementReport                   OPTIONAL,
        failureCause                    FailureCauseWithProtErr             OPTIONAL
}

SRNC-RelocationInfo-r5-IEs ::=          SEQUENCE {
    -- Non-RRC IEs
        -- IE rb-IdentityForHOMessage includes the identity of the RB used by the source SRNC
        -- to send the message contained in the IE "TargetRNC-ToSourceRNC-Container".
        -- Only included if type is "UE involved"
        rb-IdentityForHOMessage         RB-Identity                         OPTIONAL,
        stateOfRRC                      StateOfRRC,
        stateOfRRC-Procedure            StateOfRRC-Procedure,
    -- Ciphering related information IEs
        cipheringStatusList             CipheringStatusList-r4,
        latestConfiguredCN-Domain       CN-DomainIdentity,
        calculationTimeForCiphering     CalculationTimeForCiphering         OPTIONAL,
        count-C-List                    COUNT-C-List                        OPTIONAL,
        cipheringInfoPerRB-List         CipheringInfoPerRB-List-r4          OPTIONAL,
    -- Integrity protection related information IEs
        integrityProtectionStatus       IntegrityProtectionStatus,
        srb-SpecificIntegrityProtInfo   SRB-SpecificIntegrityProtInfoList   OPTIONAL,
        implementationSpecificParams    ImplementationSpecificParams        OPTIONAL,
    -- User equipment IEs
        u-RNTI                          U-RNTI,
        c-RNTI                          C-RNTI                              OPTIONAL,
        ue-RadioAccessCapability        UE-RadioAccessCapability-r5,
        ue-RadioAccessCapability-ext    UE-RadioAccessCapabBandFDDList      OPTIONAL,
        ue-Positioning-LastKnownPos     UE-Positioning-LastKnownPos         OPTIONAL,
        uESpecificBehaviourInformation1idle
                                        UESpecificBehaviourInformation1idle     OPTIONAL,
        uESpecificBehaviourInformation1interRAT
                                        UESpecificBehaviourInformation1interRAT     OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList-r5    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
        cn-DomainInformationList        CN-DomainInformationListFull        OPTIONAL,
    -- Measurement IEs
        ongoingMeasRepList              OngoingMeasRepList-r5               OPTIONAL,
    -- Radio bearer IEs
        predefinedConfigStatusList      PredefinedConfigStatusList,
        srb-InformationList             SRB-InformationSetupList-r5,
        rab-InformationList             RAB-InformationSetupList-r5         OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-TransChInfoList              UL-AddReconfTransChInfoList         OPTIONAL,
        -- 'dummy', 'dummy1' and 'dummy2' are not used in this version of the specification,
        -- they should not be sent and if received they should be ignored.
        dummy                           CHOICE {
            fdd                             SEQUENCE {
                dummy1                          CPCH-SetID                  OPTIONAL,
                dummy2                          DRAC-StaticInformationList  OPTIONAL
            },
            tdd                             NULL
        }                                                                   OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-TransChInfoList              DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- PhyCH IEs
        tpc-CombinationInfoList         TPC-CombinationInfoList             OPTIONAL,
    -- Measurement report
        measurementReport               MeasurementReport                   OPTIONAL,
    -- Other IEs
        failureCause                    FailureCauseWithProtErr             OPTIONAL
}

SRNC-RelocationInfo-v690ext-IEs ::= SEQUENCE {
    -- User equipment IEs
        -- IE ueCapabilityContainer is used for the transparent transfer of capability information
        -- received from the UE
        ueCapabilityContainer           BIT STRING
                                            (CONTAINING UE-CapabilityContainer-IEs) OPTIONAL,
        -- IE ueCapabilityContainer-RSC and IE ueCapabilityContainer-UCI are used for the
        -- transparent transfer of capability information received from the UE that was introduced
        -- in a release independent manner, i.e., transferred within a VLEC. These UE capabilities
        -- are included both in the RRC CONNECTION SETUP COMPLETE and the UE CAPABILITY INFORMATION
```

```
        -- messages. Only the VLEC of one message needs to be included i.e. the one from these
        -- messages that was last received.
        -- Case 1: If the last received message was a RRC CONNECTION SETUP COMPLETE (RSC)
        ueCapabilityContainer-RSC       BIT STRING
                                (CONTAINING RRCConnectionSetupComplete-r3-add-ext-IEs)  OPTIONAL,
        -- Case 2: If the last received message was a UE CAPABILITY INFORMATION (UCI)
        ueCapabilityContainer-UCI       BIT STRING
                                (CONTAINING UECapabilityInformation-r3-add-ext-IEs)     OPTIONAL,
    -- Radio bearer IEs
        rab-InformationSetupList        RAB-InformationSetupList-r6-ext     OPTIONAL,
    -- Measurement report
        measuredResultsOnRACHinterFreq  MeasuredResultsOnRACHinterFreq      OPTIONAL,
    -- MBMS IEs
        mbms-JoinedInformation          MBMS-JoinedInformation-r6           OPTIONAL,
    -- Measurement IEs
        intraFreqReportingCriteria      IntraFreqReportingCriteria-r6-ext       OPTIONAL
}

SRNC-RelocationInfo-r6-IEs ::=          SEQUENCE {
    -- Non-RRC IEs
        -- IE rb-IdentityForHOMessage includes the identity of the RB used by the source SRNC
        -- to send the message contained in the IE "TargetRNC-ToSourceRNC-Container".
        -- Only included if type is "UE involved"
        rb-IdentityForHOMessage         RB-Identity                         OPTIONAL,
        stateOfRRC                      StateOfRRC,
        stateOfRRC-Procedure            StateOfRRC-Procedure,
    -- Ciphering related information IEs
        cipheringStatusList             CipheringStatusList-r4,
        latestConfiguredCN-Domain       CN-DomainIdentity,
        calculationTimeForCiphering     CalculationTimeForCiphering         OPTIONAL,
        count-C-List                    COUNT-C-List                        OPTIONAL,
        cipheringInfoPerRB-List         CipheringInfoPerRB-List-r4          OPTIONAL,
    -- Integrity protection related information IEs
        integrityProtectionStatus       IntegrityProtectionStatus,
        srb-SpecificIntegrityProtInfo   SRB-SpecificIntegrityProtInfoList   OPTIONAL,
        implementationSpecificParams    ImplementationSpecificParams        OPTIONAL,
    -- User equipment IEs
        u-RNTI                          U-RNTI,
        c-RNTI                          C-RNTI                              OPTIONAL,
        ue-RadioAccessCapability        UE-RadioAccessCapability-r6,
        ue-RadioAccessCapability-ext    UE-RadioAccessCapabBandFDDList      OPTIONAL,
        ue-Positioning-LastKnownPos     UE-Positioning-LastKnownPos         OPTIONAL,
        uESpecificBehaviourInformation1idle
                                        UESpecificBehaviourInformation1idle     OPTIONAL,
        uESpecificBehaviourInformation1interRAT
                                        UESpecificBehaviourInformation1interRAT     OPTIONAL,
        -- IE ueCapabilityContainer is used for the transparent transfer of capability information
        -- received from the UE
        ueCapabilityContainer           BIT STRING
                                            (CONTAINING UE-CapabilityContainer-IEs) OPTIONAL,
        -- IE ueCapabilityContainer-RSC and IE ueCapabilityContainer-UCI are used for the
        -- transparent transfer of capability information received from the UE that was introduced
        -- in a release independent manner, i.e., transferred within a VLEC. These UE capabilities
        -- are included both in the RRC CONNECTION SETUP COMPLETE and the UE CAPABILITY INFORMATION
        -- messages. Only the VLEC of one message needs to be included i.e. the one from these
        -- messages that was last received.
        -- Case 1: If the last received message was a RRC CONNECTION SETUP COMPLETE (RSC)
        ueCapabilityContainer-RSC       BIT STRING
                                (CONTAINING RRCConnectionSetupComplete-r3-add-ext-IEs)  OPTIONAL,
        -- Case 2: If the last received message was a UE CAPABILITY INFORMATION (UCI)
        ueCapabilityContainer-UCI       BIT STRING
                                (CONTAINING UECapabilityInformation-r3-add-ext-IEs)     OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList-r5    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
        cn-DomainInformationList        CN-DomainInformationListFull        OPTIONAL,
    -- Measurement IEs
        ongoingMeasRepList              OngoingMeasRepList-r6               OPTIONAL,
        interRATCellInfoIndication      InterRATCellInfoIndication          OPTIONAL,
    -- Radio bearer IEs
        predefinedConfigStatusList      PredefinedConfigStatusList,
        srb-InformationList             SRB-InformationSetupList-r6,
        rab-InformationList             RAB-InformationSetupList-r6         OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
```

```
        ul-TransChInfoList              UL-AddReconfTransChInfoList-r6      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-TransChInfoList              DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- PhyCH IEs
        tpc-CombinationInfoList         TPC-CombinationInfoList             OPTIONAL,
        storedCompressedModeInfo        StoredCompressedModeInfo            OPTIONAL,
    -- Measurement report
        measurementReport               BIT STRING
                            (CONTAINING MeasurementReport)                  OPTIONAL,
    -- Other IEs
        failureCause                    FailureCauseWithProtErr             OPTIONAL,
    -- MBMS IEs
        mbms-JoinedInformation          MBMS-JoinedInformation-r6           OPTIONAL
}

SRNC-RelocationInfo-v6b0ext-IEs ::= SEQUENCE {
        -- The order of the RABs in IE rab-InformationSetupListExt is the same as
        -- in IE rab-InformationSetupList that is included in this message
        rab-InformationSetupListExt     RAB-InformationSetupList-v6b0ext    OPTIONAL,
        mbmsSelectedServiceInfo         MBMS-SelectedServiceInfo
}

SRNC-RelocationInfo-r7-IEs ::=          SEQUENCE {
    -- Non-RRC IEs
        -- IE rb-IdentityForHOMessage includes the identity of the RB used by the source SRNC
        -- to send the message contained in the IE "TargetRNC-ToSourceRNC-Container".
        -- Only included if type is "UE involved"
        rb-IdentityForHOMessage         RB-Identity                         OPTIONAL,
        stateOfRRC                      StateOfRRC,
        stateOfRRC-Procedure            StateOfRRC-Procedure,
    -- Ciphering related information IEs
        cipheringStatusList             CipheringStatusList-r4,
        latestConfiguredCN-Domain       CN-DomainIdentity,
        calculationTimeForCiphering     CalculationTimeForCiphering         OPTIONAL,
        count-C-List                    COUNT-C-List                        OPTIONAL,
        cipheringInfoPerRB-List         CipheringInfoPerRB-List-r4          OPTIONAL,
    -- Integrity protection related information IEs
        integrityProtectionStatus       IntegrityProtectionStatus,
        srb-SpecificIntegrityProtInfo   SRB-SpecificIntegrityProtInfoList   OPTIONAL,
        implementationSpecificParams    ImplementationSpecificParams        OPTIONAL,
    -- User equipment IEs
        u-RNTI                          U-RNTI,
        c-RNTI                          C-RNTI                              OPTIONAL,
        ue-RadioAccessCapability        UE-RadioAccessCapability-r6,
        ue-RadioAccessCapability-ext    UE-RadioAccessCapabBandFDDList      OPTIONAL,
        ue-Positioning-LastKnownPos     UE-Positioning-LastKnownPos         OPTIONAL,
        uESpecificBehaviourInformation1idle
                                        UESpecificBehaviourInformation1idle     OPTIONAL,
        uESpecificBehaviourInformation1interRAT
                                        UESpecificBehaviourInformation1interRAT     OPTIONAL,
        -- IE ueCapabilityContainer is used for the transparent transfer of capability information
        -- received from the UE
        ueCapabilityContainer           BIT STRING
                                            (CONTAINING UE-CapabilityContainer-IEs) OPTIONAL,
        -- IE ueCapabilityContainer-RSC and IE ueCapabilityContainer-UCI are used for the
        -- transparent transfer of capability information received from the UE that was introduced
        -- in a release independent manner, i.e., transferred within a VLEC. These UE capabilities
        -- are included both in the RRC CONNECTION SETUP COMPLETE and the UE CAPABILITY INFORMATION
        -- messages. Only the VLEC of one message needs to be included i.e. the one from these
        -- messages that was last received.
        -- Case 1: If the last received message was a RRC CONNECTION SETUP COMPLETE (RSC)
        ueCapabilityContainer-RSC       BIT STRING
                            (CONTAINING RRCConnectionSetupComplete-r3-add-ext-IEs)  OPTIONAL,
        -- Case 2: If the last received message was a UE CAPABILITY INFORMATION (UCI)
        ueCapabilityContainer-UCI       BIT STRING
                            (CONTAINING UECapabilityInformation-r3-add-ext-IEs)     OPTIONAL,
    -- Other IEs
        ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList-r5    OPTIONAL,
    -- UTRAN mobility IEs
        ura-Identity                    URA-Identity                        OPTIONAL,
    -- Core network IEs
        cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
        cn-DomainInformationList        CN-DomainInformationListFull        OPTIONAL,
    -- Measurement IEs
        ongoingMeasRepList              OngoingMeasRepList-r6               OPTIONAL,
        interRATCellInfoIndication      InterRATCellInfoIndication          OPTIONAL,
    -- Radio bearer IEs
        predefinedConfigStatusList      PredefinedConfigStatusList,
```

```
        srb-InformationList             SRB-InformationSetupList-r6,
        rab-InformationList             RAB-InformationSetupList-r6         OPTIONAL,
    -- Transport channel IEs
        ul-CommonTransChInfo            UL-CommonTransChInfo-r4             OPTIONAL,
        ul-TransChInfoList              UL-AddReconfTransChInfoList-r7      OPTIONAL,
        dl-CommonTransChInfo            DL-CommonTransChInfo-r4             OPTIONAL,
        dl-TransChInfoList              DL-AddReconfTransChInfoList-r5      OPTIONAL,
    -- PhyCH IEs
        tpc-CombinationInfoList         TPC-CombinationInfoList             OPTIONAL,
        storedCompressedModeInfo        StoredCompressedModeInfo            OPTIONAL,
    -- Measurement report
        measurementReport               MeasurementReport                   OPTIONAL,
    -- Other IEs
        failureCause                    FailureCauseWithProtErr             OPTIONAL,
    -- MBMS IEs
        mbms-JoinedInformation          MBMS-JoinedInformation-r6           OPTIONAL
}

-- IE definitions

CalculationTimeForCiphering ::=     SEQUENCE {
    cell-Id                             CellIdentity,
    sfn                                 INTEGER (0..4095)
}

CipheringInfoPerRB ::=              SEQUENCE {
    dl-HFN                              BIT STRING (SIZE (20..25)),
    ul-HFN                              BIT STRING (SIZE (20..25))
}

CipheringInfoPerRB-r4 ::=           SEQUENCE {
    rb-Identity                         RB-Identity,
    dl-HFN                              BIT STRING (SIZE (20..25)),
    dl-UM-SN                            BIT STRING (SIZE (7))               OPTIONAL,
    ul-HFN                              BIT STRING (SIZE (20..25))
}

-- TABULAR: CipheringInfoPerRB-List, multiplicity value numberOfRadioBearers
-- has been replaced with maxRB.
CipheringInfoPerRB-List ::=         SEQUENCE (SIZE (1..maxRB)) OF
                                        CipheringInfoPerRB

CipheringInfoPerRB-List-r4 ::=      SEQUENCE (SIZE (1..maxRB)) OF
                                        CipheringInfoPerRB-r4


CipheringStatus ::=                 ENUMERATED {
                                        started, notStarted }

CipheringStatusList-r4 ::=          SEQUENCE (SIZE (1..maxCNdomains)) OF
                                        CipheringStatusCNdomain-r4

CipheringStatusCNdomain-r4 ::=      SEQUENCE {
        cn-DomainIdentity               CN-DomainIdentity,
        cipheringStatus                 CipheringStatus,
        start-Value                     START-Value
}

CN-DomainInformation-v390ext ::=        SEQUENCE {
    cn-DRX-CycleLengthCoeff             CN-DRX-CycleLengthCoefficient
}

CN-DomainInformationList-v390ext ::=    SEQUENCE (SIZE (1..maxCNdomains)) OF
                                        CN-DomainInformation-v390ext

CompressedModeMeasCapability-r4 ::= SEQUENCE {
    fdd-Measurements                    BOOLEAN,
    -- TABULAR: The IEs tdd-Measurements, gsm-Measurements and multiCarrierMeasurements
    -- are made optional since they are conditional based on another information element.
    -- Their absence corresponds to the case where the condition is not true.
    tdd384-Measurements                 BOOLEAN                             OPTIONAL,
    tdd128-Measurements                 BOOLEAN                             OPTIONAL,
    gsm-Measurements                    GSM-Measurements                    OPTIONAL,
    multiCarrierMeasurements            BOOLEAN                             OPTIONAL
}

COUNT-C-List ::=                        SEQUENCE (SIZE (1..maxCNdomains)) OF
                                        COUNT-CSingle
```

```
COUNT-CSingle ::=                       SEQUENCE {
    cn-DomainIdentity                   CN-DomainIdentity,
    count-C                             BIT STRING (SIZE (32))
}

DL-PhysChCapabilityFDD-r4 ::=       SEQUENCE {
    -- The IE "maxNoDPCH-PDSCH-Codes" only gives information on the maximum number of DPCH Codes.
    maxNoDPCH-PDSCH-Codes               INTEGER (1..8),
    maxNoPhysChBitsReceived             MaxNoPhysChBitsReceived,
    supportForSF-512                    BOOLEAN,
    -- dummy, dummy2 and dummy3 are not used in this version of the specification
    -- and if received they should be ignored.
    dummy                               BOOLEAN,
    dummy2                              SimultaneousSCCPCH-DPCH-Reception,
    dummy3                              SupportOfDedicatedPilotsForChEstimation     OPTIONAL
}

DL-PhysChCapabilityFDD-r5 ::=       SEQUENCE {
    -- The IE "maxNoDPCH-PDSCH-Codes" only gives information on the maximum number of DPCH Codes.
    maxNoDPCH-PDSCH-Codes               INTEGER (1..8),
    maxNoPhysChBitsReceived             MaxNoPhysChBitsReceived,
    supportForSF-512                    BOOLEAN,
    -- dummy, dumy2 and dummy3 are not used in this version of the specification
    -- and if received they should be ignored.
    dummy                               BOOLEAN,
    dummy2                              SimultaneousSCCPCH-DPCH-Reception,
    dummy3                              SupportOfDedicatedPilotsForChEstimation     OPTIONAL,
    fdd-hspdsch                         CHOICE {
        supported                           SEQUENCE {
            hsdsch-physical-layer-category      HSDSCH-physical-layer-category,
            -- dummy and dummy2 are not used in this version of the specification
            -- and if received they should be ignored.
            dummy                               BOOLEAN,
            dummy2                              BOOLEAN
        },
        unsupported                         NULL
    }
}

DL-PhysChCapabilityTDD-r5 ::=       SEQUENCE {
    maxTS-PerFrame                      MaxTS-PerFrame,
    maxPhysChPerFrame                   MaxPhysChPerFrame,
    minimumSF                           MinimumSF-DL,
    supportOfPDSCH                      BOOLEAN,
    maxPhysChPerTS                      MaxPhysChPerTS,
    tdd384-hspdsch                      CHOICE {
        supported                           HSDSCH-physical-layer-category,
        unsupported                         NULL
    }
}

DL-PhysChCapabilityTDD-LCR-r5 ::=   SEQUENCE {
    maxTS-PerSubFrame                   MaxTS-PerSubFrame-r4,
    maxPhysChPerFrame                   MaxPhysChPerSubFrame-r4,
    minimumSF                           MinimumSF-DL,
    supportOfPDSCH                      BOOLEAN,
    maxPhysChPerTS                      MaxPhysChPerTS,
    supportOf8PSK                       BOOLEAN,
    tdd128-hspdsch                      CHOICE {
        supported                           HSDSCH-physical-layer-category,
        unsupported                         NULL
    }
}

DL-RFC3095-Context ::=              SEQUENCE {
    rfc3095-Context-Identity            INTEGER (0..16383),
    dl-mode                             ENUMERATED {u, o, r},
    dl-ref-ir                           OCTET STRING ( SIZE (1..3000)),
    dl-ref-time                         INTEGER (0..4294967295)     OPTIONAL,
    dl-curr-time                        INTEGER (0..4294967295)     OPTIONAL,
    dl-syn-offset-id                    INTEGER (0..65535)          OPTIONAL,
    dl-syn-slope-ts                     INTEGER (0..4294967295)     OPTIONAL,
    dl-dyn-changed                      BOOLEAN
}

ImplementationSpecificParams ::=    BIT STRING (SIZE (1..512))
```

```
IntegrityProtectionStatus ::=       ENUMERATED {
                                        started, notStarted }

InterRAT-UE-RadioAccessCapabilityList-r5 ::=    SEQUENCE {
    interRAT-UE-RadioAccessCapability   InterRAT-UE-RadioAccessCapabilityList,
    geranIu-RadioAccessCapability       GERANIu-RadioAccessCapability               OPTIONAL
}

IntraFreqReportingCriteria-r6-ext ::= SEQUENCE {
    -- The content of the v690 non-critical extension should be
    -- considered as an extension of IE IntraFreqEventCriteriaList
    event                               Event1j-r6,
    hysteresis                          Hysteresis,
    timeToTrigger                       TimeToTrigger,
    reportingCellStatus                 ReportingCellStatus                 OPTIONAL
}

-- dummy is not used in this version of the specification, it should
-- not be sent and if received it should be ignored.
MaxHcContextSpace-r5 ::=                ENUMERATED {
                                            dummy, by1024, by2048, by4096, by8192,
                                            by16384, by32768, by65536, by131072 }

MeasurementCapability-r4 ::=        SEQUENCE {
    downlinkCompressedMode              CompressedModeMeasCapability-r4,
    uplinkCompressedMode                CompressedModeMeasCapability-r4
}

MeasurementCommandWithType ::=      CHOICE {
    setup                               MeasurementType,
    modify                              NULL,
    release                             NULL
}

MeasurementCommandWithType-r4 ::=   CHOICE {
    setup                               MeasurementType-r4,
    modify                              NULL,
    release                             NULL
}

MeasurementCommandWithType-r6 ::=   CHOICE {
    setup                               MeasurementType-r6,
    modify                              NULL,
    release                             NULL
}

OngoingMeasRep ::=                  SEQUENCE {
    measurementIdentity                 MeasurementIdentity,
    -- TABULAR: The CHOICE Measurement in the tabular description is included
    -- in MeasurementCommandWithType
    measurementCommandWithType          MeasurementCommandWithType,
    measurementReportingMode            MeasurementReportingMode            OPTIONAL,
    additionalMeasurementID-List        AdditionalMeasurementID-List        OPTIONAL
}

OngoingMeasRep-r4 ::=               SEQUENCE {
    measurementIdentity                 MeasurementIdentity,
    -- TABULAR: The CHOICE Measurement in the tabular description is included
    -- in MeasurementCommandWithType-r4.
    measurementCommandWithType          MeasurementCommandWithType-r4,
    measurementReportingMode            MeasurementReportingMode            OPTIONAL,
    additionalMeasurementID-List        AdditionalMeasurementID-List        OPTIONAL
}

OngoingMeasRep-r5 ::=               SEQUENCE {
    measurementIdentity                 MeasurementIdentity,
    -- TABULAR: The CHOICE Measurement in the tabular description is included
    -- in MeasurementCommandWithType-r4.
    measurementCommandWithType          MeasurementCommandWithType-r4,
    measurementReportingMode            MeasurementReportingMode            OPTIONAL,
    additionalMeasurementID-List        AdditionalMeasurementID-List        OPTIONAL,
    measurementCommand-v590ext          CHOICE {
        -- the choice "intra-frequency" shall be used for the case of intra-frequency measurement,
        -- as well as when intra-frequency events are configured for inter-frequency measurement
        intra-frequency                     Intra-FreqEventCriteriaList-v590ext,
        inter-frequency                     Inter-FreqEventCriteriaList-v590ext
    }       OPTIONAL,
```

```
    intraFreqReportingCriteria-1b-r5        IntraFreqReportingCriteria-1b-r5    OPTIONAL,
    intraFreqEvent-1d-r5                    IntraFreqEvent-1d-r5                OPTIONAL
}

OngoingMeasRep-r6 ::=               SEQUENCE {
    measurementIdentity                 MeasurementIdentity,
    measurementCommandWithType          MeasurementCommandWithType-r6,
    measurementReportingMode            MeasurementReportingMode            OPTIONAL,
    additionalMeasurementID-List        AdditionalMeasurementID-List        OPTIONAL
}

OngoingMeasRepList ::=              SEQUENCE (SIZE (1..maxNoOfMeas)) OF
                                        OngoingMeasRep

OngoingMeasRepList-r4 ::=           SEQUENCE (SIZE (1..maxNoOfMeas)) OF
                                        OngoingMeasRep-r4

OngoingMeasRepList-r5 ::=           SEQUENCE (SIZE (1..maxNoOfMeas)) OF
                                        OngoingMeasRep-r5

OngoingMeasRepList-r6 ::=           SEQUENCE (SIZE (1..maxNoOfMeas)) OF
                                        OngoingMeasRep-r6

PDCP-Capability-r4 ::=              SEQUENCE {
    losslessSRNS-RelocationSupport      BOOLEAN,
    supportForRfc2507                   CHOICE {
        notSupported                        NULL,
        supported                           MaxHcContextSpace
    },
    supportForRfc3095                   CHOICE {
        notSupported                        NULL,
        supported                           SEQUENCE {
            maxROHC-ContextSessions             MaxROHC-ContextSessions-r4  DEFAULT s16,
            reverseCompressionDepth             INTEGER (0..65535)          DEFAULT 0
        }
    }
}

PDCP-Capability-r5 ::=              SEQUENCE {
    losslessSRNS-RelocationSupport      BOOLEAN,
    supportForRfc2507                   CHOICE {
        notSupported                        NULL,
        supported                           MaxHcContextSpace-r5
    },
    supportForRfc3095                   CHOICE {
        notSupported                        NULL,
        supported                           SEQUENCE {
            maxROHC-ContextSessions             MaxROHC-ContextSessions-r4  DEFAULT s16,
            reverseCompressionDepth             INTEGER (0..65535)          DEFAULT 0,
            supportForRfc3095ContextRelocation  BOOLEAN
        }
    }
}

PDCP-Capability-r6 ::=              SEQUENCE {
    losslessSRNS-RelocationSupport      BOOLEAN,
    losslessDLRLC-PDUSizeChange         ENUMERATED { true }                 OPTIONAL,
    supportForRfc2507                   CHOICE {
        notSupported                        NULL,
        supported                           MaxHcContextSpace-r5
    },
    supportForRfc3095                   CHOICE {
        notSupported                        NULL,
        supported                           SEQUENCE {
            maxROHC-ContextSessions             MaxROHC-ContextSessions-r4  DEFAULT s16,
            reverseCompressionDepth             INTEGER (0..65535)          DEFAULT 0,
            supportForRfc3095ContextRelocation  BOOLEAN
        }
    }
}

PhysicalChannelCapability-r4 ::=    SEQUENCE {
        fddPhysChCapability             SEQUENCE {
            downlinkPhysChCapability        DL-PhysChCapabilityFDD-r4,
            uplinkPhysChCapability          UL-PhysChCapabilityFDD
        }                                       OPTIONAL,
        tdd384-PhysChCapability         SEQUENCE {
            downlinkPhysChCapability        DL-PhysChCapabilityTDD,
```

```
            uplinkPhysChCapability              UL-PhysChCapabilityTDD
        }                                           OPTIONAL,
        tdd128-PhysChCapability             SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityTDD-LCR-r4,
            uplinkPhysChCapability              UL-PhysChCapabilityTDD-LCR-r4
        }                                           OPTIONAL
}

PhysicalChannelCapability-r5 ::=        SEQUENCE {
        fddPhysChCapability                 SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityFDD-r5,
            uplinkPhysChCapability              UL-PhysChCapabilityFDD
        }                                           OPTIONAL,
        tdd384-PhysChCapability             SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityTDD-r5,
            uplinkPhysChCapability              UL-PhysChCapabilityTDD
        }                                           OPTIONAL,
        tdd128-PhysChCapability             SEQUENCE {
            downlinkPhysChCapability            DL-PhysChCapabilityTDD-LCR-r5,
            uplinkPhysChCapability              UL-PhysChCapabilityTDD-LCR-r4
        }                                           OPTIONAL
}

RF-Capability-r4 ::=                SEQUENCE {
        fddRF-Capability                    SEQUENCE {
            ue-PowerClass                       UE-PowerClassExt,
            txRxFrequencySeparation             TxRxFrequencySeparation
        }                                                               OPTIONAL,
        tdd384-RF-Capability                SEQUENCE {
            ue-PowerClass                       UE-PowerClassExt,
            radioFrequencyBandTDDList           RadioFrequencyBandTDDList,
            chipRateCapability                  ChipRateCapability
        }                                                               OPTIONAL,
        tdd128-RF-Capability                SEQUENCE {
            ue-PowerClass                       UE-PowerClassExt,
            radioFrequencyBandTDDList           RadioFrequencyBandTDDList,
            chipRateCapability                  ChipRateCapability
        }                                                               OPTIONAL
}

RFC3095-ContextInfo ::=             SEQUENCE {
    rb-Identity                         RB-Identity,
    rfc3095-Context-List                RFC3095-Context-List
}

RFC3095-Context-List ::=            SEQUENCE (SIZE (1..maxRFC3095-CID)) OF SEQUENCE {
    dl-RFC3095-Context                  DL-RFC3095-Context      OPTIONAL,
    ul-RFC3095-Context                  UL-RFC3095-Context      OPTIONAL
}

RLC-Capability-r5 ::=               SEQUENCE {
    totalRLC-AM-BufferSize              TotalRLC-AM-BufferSize-r5,
    maximumRLC-WindowSize               MaximumRLC-WindowSize,
    maximumAM-EntityNumber              MaximumAM-EntityNumberRLC-Cap
}


SRB-SpecificIntegrityProtInfo ::=   SEQUENCE {
    ul-RRC-HFN                          BIT STRING (SIZE (28)),
    dl-RRC-HFN                          BIT STRING (SIZE (28)),
    ul-RRC-SequenceNumber               RRC-MessageSequenceNumber,
    dl-RRC-SequenceNumber               RRC-MessageSequenceNumber
}

SRB-SpecificIntegrityProtInfoList ::= SEQUENCE (SIZE (4..maxSRBsetup)) OF
                                        SRB-SpecificIntegrityProtInfo

StateOfRRC ::=                      ENUMERATED {
                                        cell-DCH, cell-FACH,
                                        cell-PCH, ura-PCH }

StateOfRRC-Procedure ::=            ENUMERATED {
                                        awaitNoRRC-Message,
                                        awaitRB-ReleaseComplete,
                                        awaitRB-SetupComplete,
                                        awaitRB-ReconfigurationComplete,
                                        awaitTransportCH-ReconfigurationComplete,
                                        awaitPhysicalCH-ReconfigurationComplete,
```

```
                                    awaitActiveSetUpdateComplete,
                                    awaitHandoverComplete,
                                    sendCellUpdateConfirm,
                                    sendUraUpdateConfirm,
                                    -- dummy is not used in this version of specification
                                    -- It should not be sent
                                    dummy,
                                    otherStates
}

TotalRLC-AM-BufferSize-r5 ::=       ENUMERATED {
                                    kb10, kb50, kb100, kb150, kb200,
                                    kb300, kb400, kb500, kb750, kb1000 }

TPC-Combination-Info ::= SEQUENCE {
        primaryCPICH-Info               PrimaryCPICH-Info,
        tpc-CombinationIndex            TPC-CombinationIndex
}

UE-MultiModeRAT-Capability-r5 ::=   SEQUENCE {
    multiRAT-CapabilityList             MultiRAT-Capability,
    multiModeCapability                 MultiModeCapability,
    supportOfUTRAN-ToGERAN-NACC         BOOLEAN
}

UE-Positioning-Capability-r4 ::=    SEQUENCE {
    standaloneLocMethodsSupported           BOOLEAN,
    ue-BasedOTDOA-Supported                 BOOLEAN,
    networkAssistedGPS-Supported            NetworkAssistedGPS-Supported,
    supportForUE-GPS-TimingOfCellFrames     BOOLEAN,
    supportForIPDL                          BOOLEAN,
    rx-tx-TimeDifferenceType2Capable        BOOLEAN,
    validity-CellPCH-UraPCH                 ENUMERATED { true }     OPTIONAL,
    sfn-sfnType2Capability                  ENUMERATED { true }         OPTIONAL
}

UE-Positioning-LastKnownPos ::=     SEQUENCE {
        sfn                             INTEGER (0..4095),
        cell-id                         CellIdentity,
        positionEstimate                PositionEstimate
}

UE-RadioAccessCapability-r4 ::=     SEQUENCE {
    accessStratumReleaseIndicator       AccessStratumReleaseIndicator,
    pdcp-Capability                     PDCP-Capability-r4,
    rlc-Capability                      RLC-Capability,
    transportChannelCapability          TransportChannelCapability,
    rf-Capability                       RF-Capability-r4,
    physicalChannelCapability           PhysicalChannelCapability-r4,
    ue-MultiModeRAT-Capability          UE-MultiModeRAT-Capability,
    securityCapability                  SecurityCapability,
    ue-positioning-Capability           UE-Positioning-Capability-r4,
    measurementCapability               MeasurementCapability-r4        OPTIONAL
}

UE-RadioAccessCapability-r5 ::=     SEQUENCE {
    accessStratumReleaseIndicator       AccessStratumReleaseIndicator,
    dl-CapabilityWithSimultaneousHS-DSCHConfig
                                        DL-CapabilityWithSimultaneousHS-DSCHConfig  OPTIONAL,
    pdcp-Capability                     PDCP-Capability-r5,
    rlc-Capability                      RLC-Capability-r5,
    transportChannelCapability          TransportChannelCapability,
    rf-Capability                       RF-Capability-r4,
    physicalChannelCapability           PhysicalChannelCapability-r5,
    ue-MultiModeRAT-Capability          UE-MultiModeRAT-Capability-r5,
    securityCapability                  SecurityCapability,
    ue-positioning-Capability           UE-Positioning-Capability-r4,
    measurementCapability               MeasurementCapability-r4        OPTIONAL
}

UE-RadioAccessCapability-r6 ::=     SEQUENCE {
    accessStratumReleaseIndicator       AccessStratumReleaseIndicator,
    dl-CapabilityWithSimultaneousHS-DSCHConfig
                                        DL-CapabilityWithSimultaneousHS-DSCHConfig  OPTIONAL,
    pdcp-Capability                     PDCP-Capability-r6,
    rlc-Capability                      RLC-Capability-r5,
    transportChannelCapability          TransportChannelCapability,
    rf-Capability                       RF-Capability-r4,
```

```
    physicalChannelCapability           PhysicalChannelCapability-r5,
    ue-MultiModeRAT-Capability          UE-MultiModeRAT-Capability-r5,
    securityCapability                  SecurityCapability,
    ue-positioning-Capability           UE-Positioning-Capability-r4,
    measurementCapability               MeasurementCapability-r4        OPTIONAL
}

UE-RadioAccessCapability-r7 ::=     SEQUENCE {
    accessStratumReleaseIndicator       AccessStratumReleaseIndicator,
    dl-CapabilityWithSimultaneousHS-DSCHConfig
                                        DL-CapabilityWithSimultaneousHS-DSCHConfig  OPTIONAL,
    pdcp-Capability                     PDCP-Capability-r6,
    rlc-Capability                      RLC-Capability-r5,
    transportChannelCapability          TransportChannelCapability,
    rf-Capability                       RF-Capability-r7,
    physicalChannelCapability           PhysicalChannelCapability-r7,
    ue-MultiModeRAT-Capability          UE-MultiModeRAT-Capability-r5,
    securityCapability                  SecurityCapability,
    ue-positioning-Capability           UE-Positioning-Capability-r4,
    measurementCapability               MeasurementCapability-r4        OPTIONAL
}

UL-RFC3095-Context ::=              SEQUENCE {
    rfc3095-Context-Identity            INTEGER (0..16383),
    ul-mode                             ENUMERATED {u, o, r},
    ul-ref-ir                           OCTET STRING ( SIZE (1..3000)),
    ul-ref-time                         INTEGER (0..4294967295)     OPTIONAL,
    ul-curr-time                        INTEGER (0..4294967295)     OPTIONAL,
    ul-syn-offset-id                    INTEGER (0..65535)          OPTIONAL,
    ul-syn-slope-ts                     INTEGER (0..4294967295)     OPTIONAL,
    ul-ref-sn-1                         INTEGER (0..65535)          OPTIONAL
}

END
```

12 Message transfer syntax

Transfer syntax for RRC PDUs is derived from their ASN.1 definitions by use of Packed Encoding Rules, unaligned as specified in X.691 [49], and with adapted final padding. If special encoding is used, it is indicated in the ECN module defined for each ASN.1 module. The use of special encoding is defined in [14].

The following encoding rules apply in addition to what has been specified in X.691 [49]:

- When a bit string value is placed in a bit-field as specified in 15.6 to 15.11 in [11], the leading bit of the bit string value shall be placed in the leading bit of the bit-field, and the trailing bit of the bit string value shall be placed in the trailing bit of the bit-field.

NOTE: The terms "leading bit" and "trailing bit" are defined in ITU-T Rec. X.680 | ISO/IEC 8824-1. When using the "bstring" notation, the leading bit of the bit string value is on the left, and the trailing bit of the bit string value is on the right.

12.1 Structure of encoded RRC messages

An RRC PDU, which is the bit string that is exchanged between peer entities/ across the radio interface, is the concatenation of a basic production, an extension and padding, in that order.

RRC PDUs shall be mapped to and from RLC SDUs upon transmission and reception as follows:

- when delivering an RRC PDU as an RLC SDU to the RLC layer for transmission, the first bit of the RRC PDU shall be represented as the first bit in the RLC SDU and onwards; and

- upon reception of an RLC SDU from the RLC layer, the first bit of the RLC SDU shall represent the first bit of the RRC PDU and onwards.

12.1.1 Basic production

The 'basic production' is obtained by applying UNALIGNED PER to the abstract syntax value (the ASN.1 description) as specified in X.691, except for the 0 to 7 bits added at the end to produce a multiple of 8 bits. The basic production can have any positive number of bits, not necessarily a multiple of 8 bits.

12.1.2 Extension

Emitters compliant with this version of the specification of the protocol shall, unless indicated otherwise on a PDU type basis, set the extension part empty. Emitters compliant with a later version might send non-empty extensions.

12.1.3 Padding

Emitters compliant with this version of the specification of the protocol shall, unless indicated otherwise on a PDU type basis, pad the basic production with the smallest number of bits required to meet the size constraints of the lower layers. Padding bits shall be set to 0.

Receivers compliant with this version of the specification have no need to distinguish the extension and padding parts, and shall, unless indicated otherwise on a PDU type basis, accept RRC PDUs with any bit string in the extension and padding parts.

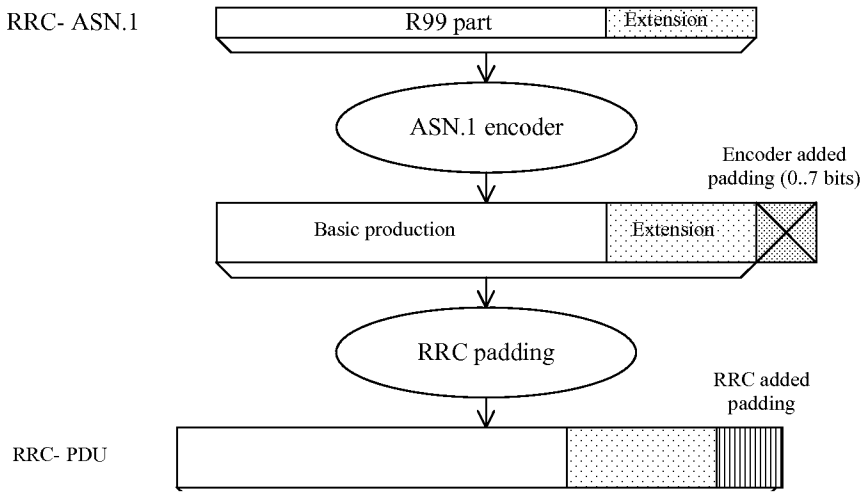


Figure 12.1.3-1: Padding

When using AM or UM mode, RLC requires that the RRC PDU length is a multiple of 8 bits.

When using Tr mode, RLC does neither impose size requirements nor perform padding. This implies that RRC has to take into account the transport format set defined for the transport channel across which the message is to be sent. RRC shall add the lowest number of padding bits required to fit the size specified for the selected transport format.

For system information blocks, building the PDU involves two steps. The first step is the building of the System Information Blocks, in which step padding is not applied (the rules for extension apply). The second step is the building of the RRC PDUs, involving segmentation and concatenation of System Information Blocks, and then padding as described above for Tr mode. The procedure is shown by means of an example as described in Figure 12.1.3-2. The example includes two System Information Blocks, SIBn and SIBn+1, of which only SIBn includes a protocol extension. The two System Information Blocks used in the example do not require segmentation and are concatenated into one SYSTEM INFORMATION message.

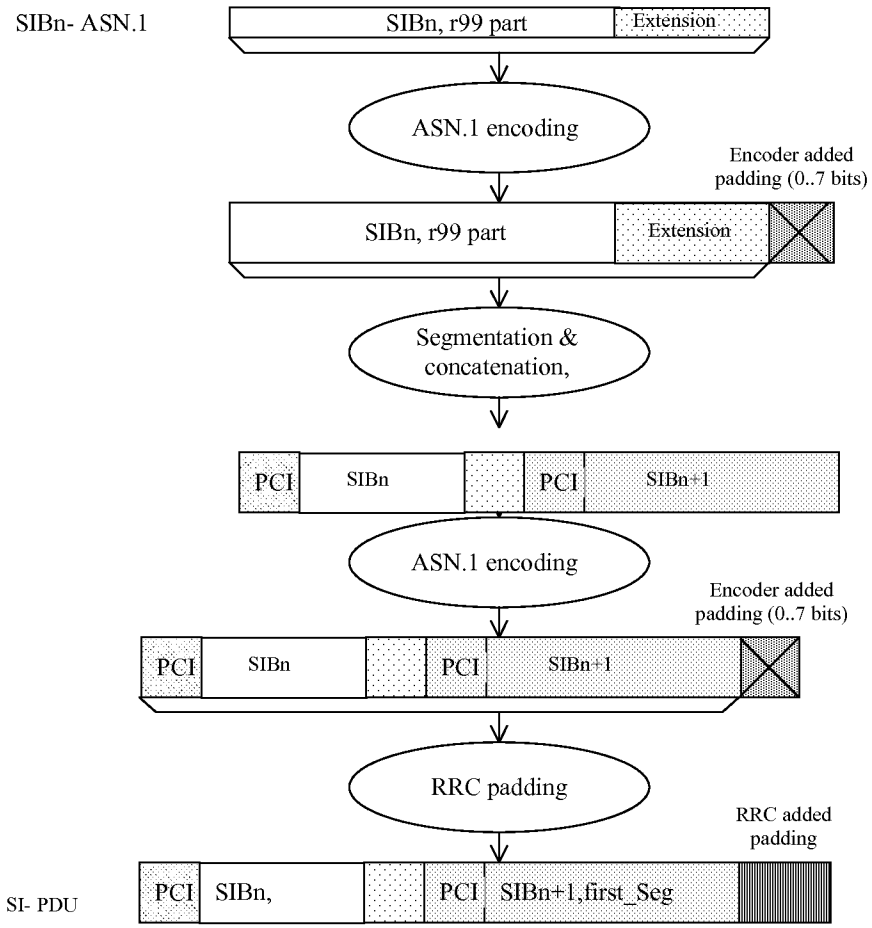


Figure 12.1.3-2: Padding for System Information

PCI: Protocol control information at SYSTEM INFORMATION message level

SI: SYSTEM INFORMATION message

For system information blocks, RRC may also add padding information at the end of IE "SIB data fixed", used both within IE "Last segment" and IE "Complete SIB". The IE "SIB data fixed" has a fixed length i.e. no length denominator used. In case the remaining amount of "SIB data" information is insufficient to fill the IE completely, RRC includes padding bits.

Since no length denominator is included, the receiving RRC cannot remove the padding added by the sender. However, since the padding used is the same as the padding added by the PER encoder to achieve octet alignment, the receiver can handle it.

NOTE 1 The mechanism described above implies that the PDU provided to the ASN.1 decoder may have more than 7 padding bits included. For a complete System Information Block of length 215 bits, 11 padding bits are added by RRC. Since the decoder requires an octet aligned input, 6 additional bits need to be added. In this (worst) case, a total of 17 padding bits is included.

NOTE 2 For the above cases, use of padding bits is possible and more efficient than including a length denominator.

When using the RRC padding described above, the segment has a fixed length, which completely fills the transport block. Therefore, in this case no RRC padding is added within the SYSTEM INFORMATION message. This is illustrated by means of the following figure.

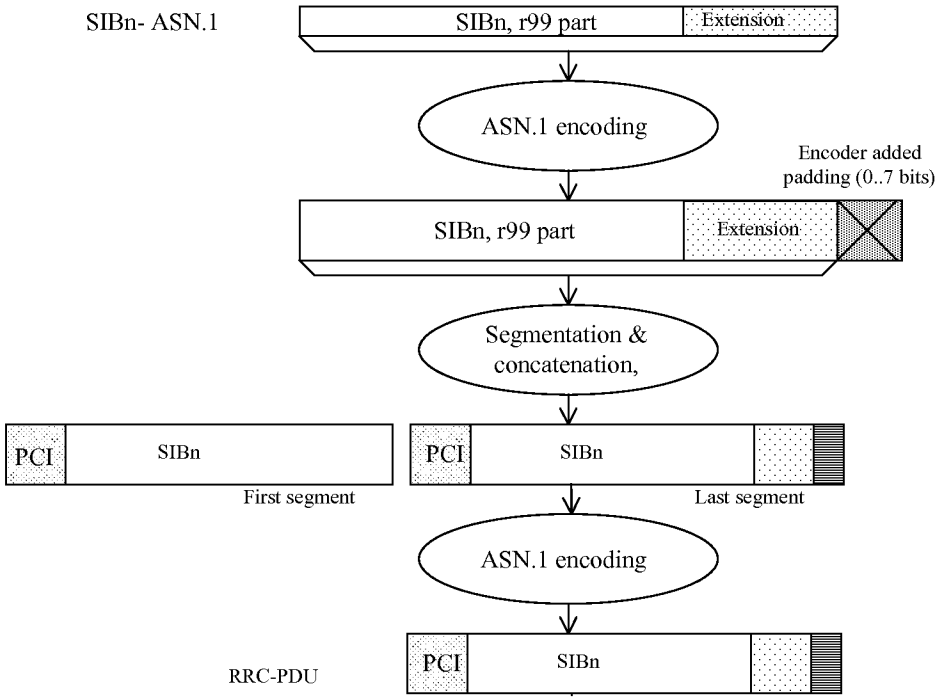


Figure 12.1.3-3: No RRC padding for System Information

12.2 ECN link module for RRC

```
RRC-ECN-Link-Module LINK-DEFINITIONS ::=
BEGIN

IMPORTS
    RRC-encodings               -- Encoding objects for RRC messages
FROM RRC-Encoding-Definitions;

ENCODE Class-definitions
    WITH RRC-encodings
    COMPLETED BY PER-BASIC-UNALIGNED

ENCODE PDU-definitions
    WITH RRC-encodings
    COMPLETED BY PER-BASIC-UNALIGNED

ENCODE InformationElements
    WITH RRC-encodings
    COMPLETED BY PER-BASIC-UNALIGNED

ENCODE Internode-definitions
    WITH RRC-encodings
    COMPLETED BY PER-BASIC-UNALIGNED

END
```


IPR2025-00221 Exhibit 2007

12.3 ECN modules for RRC

The encoding definition module "RRC-Encoding-Definitions" contains definition of the encoding object set "RRC-encodings". The encoding object set contains all the specialized encoding for RRC.

```
RRC-Encoding-Definitions ENCODING-DEFINITIONS ::=

BEGIN

EXPORTS
    RRC-encodings;

RRC-encodings #ENCODINGS ::= {
    -- Trailing bits
    outer-encoding
}

--************************************************************
--
-- The trailing bits in all RRC messages shall be ignored
-- (including unknown message contents & unknown extensions).
-- This overrides the default PER behaviour which pads the last
-- octet with zero bits.
--
--************************************************************

outer-encoding #OUTER ::= {
    ENCODER-DECODER {
    }
    DECODE AS IF {
        POST-PADDING    encoder-option
    }
}

END

Class-definitions-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END

PDU-definitions-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END

InformationElements-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END


Internode-definitions-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

12.4 RRC messages encoded otherwise

NOTE: The messages included in this section are not specified by means of ASN.1.

12.4.1 Messages using tabular encoding specification

The encoding of the message is specified by means of a table listing the information elements known in the message and their order of their appearance in the message.

When a field extends over more than one octet, the order of bit values progressively decreases as the octet number increases. The least significant bit of the field is represented by the lowest numbered bit of the highest numbered octet of the field.

12.4.1.1 TRANSPORT FORMAT COMBINATION CONTROL using transparent DCCH

12.4.1.1.1 TRANSPORT FORMAT COMBINATION CONTROL, 3 bit format

The 3 bit format is as follows:

3	**2**	**1**	Transport Format Combination Set Identity value
0	0	0	0
0	0	1	1
0	1	0	2
1	1	1	7

12.4.1.1.2 Void

12.4.1.1.3 Void

13 Protocol timers, counters, other parameters and default configurations

The information provided in subclauses 13.1 and 13.2 shall be treated as informative. The normative text is specified in the relevant subclauses in clause 8 and clause 8 shall prevail.

13.1 Timers for UE

Timer	Start	Stop	At expiry
T300	Transmission of RRC CONNECTION REQUEST in case of connection establishment for reasons other than MBMS reception	Reception of RRC CONNECTION SETUP	Retransmit RRC CONNECTION REQUEST if V300 =< N300, else go to Idle mode
T302	Transmission of CELL UPDATE/URA UPDATE	Reception of CELL UPDATE CONFIRM/URA UPDATE CONFIRM	Retransmit CELL UPDATE/URA UPDATE if V302 =< N302, else, go to Idle mode
T304	Transmission of UE CAPABILITY INFORMATION	Reception of UE CAPABILITY INFORMATION CONFIRM	Retransmit UE CAPABILITY INFORMATION if V304 =< N304, else initiate a cell update procedure
T305	Entering CELL_FACH or URA_PCH or CELL_PCH state. Reception of CELL UDPATE CONFIRM/URA UPDATE CONFIRM.	Entering another state.	Transmit CELL UPDATE if T307 is not activated and the UE detects "in service area". Otherwise, if T307 is not active, start T307.
T307	When the timer T305 has expired and the UE detects "out of service area".	When the UE detects "in service area".	Transit to idle mode
T308	Transmission of RRC CONNECTION RELEASE COMPLETE	Not stopped	Transmit RRC CONNECTION RELEASE COMPLETE if V308 <=N308, else go to idle mode.
T309	Upon reception of CELL CHANGE ORDER FROM UTRAN message	Successful response to a connection establishment request in the new cell.	Resume the connection to UTRAN
T310	Transmission of PUSCH CAPACITY REQUEST	Reception of PHYSICAL SHARED CHANNEL ALLOCATION	Transmit PUSCH CAPACITY REQUEST if V310 =< N310, else procedure stops.
T311	Reception of PHYSICAL SHARED CHANNEL ALLOCATION message with the CHOICE "*PUSCH allocation*" set to "PUSCH allocation pending".	Reception of PHYSICAL SHARED CHANNEL ALLOCATION message with CHOICE "*PUSCH allocation*" set to "PUSCH allocation assignment".	UE may initiate a PUSCH capacity request procedure.
T312	When the UE starts to establish dedicated CH	When the UE detects N312 "in sync" indication from L1.	The criteria for physical channel establishment failure is fulfilled
T313	When the UE detects consecutive N313 "out of sync" indication from L1.	When the UE detects consecutive N315 "in sync" indication from L1.	The criteria for Radio Link failure is fulfilled.
T314	When the criteria for radio link failure are fulfilled. The timer is started if radio bearer(s) that are associated with T314 exist or if only RRC connection exists only to the CS domain.	When the Cell Update procedure has been completed.	See subclause 8.3.1.13.

Timer	Start	Stop	At expiry
T315	When the criteria for radio link failure are fulfilled. The timer is started only if radio bearer(s) that are associated with T315 exist or if RRC connection exists to PS domain.	When the Cell Update procedure has been completed.	See subclause 8.3.1.14.
T316	When the UE detects "out of service area" in URA_PCH or CELL_PCH state	When the UE detects "in service area".	Initiate cell update procedure if in service area is detected. Otherwise start timer T317, transit to CELL_FACH state and initiate cell update procedure when the UE detects "in service area".
T317	When the T316 expires or when in CELL_FACH state, the UE detects "out of service area".	When the UE detects "in service area".	T317 never expires.
T318	Transmission of RRC CONNECTION REQUEST in case of connection establishment for MBMS reception	Reception of RRC CONNECTION SETUP	Enter idle mode

13.2 Counters for UE

Counter	Reset	Incremented	When reaching max value
V300	When initiating the procedure RRC connection establishment	Upon expiry of T300.	When V300 > N300, the UE enters idle mode.
V302	When initiating the procedure Cell update or URA update	Upon expiry of T302	When V302 > N302 the UE enters idle mode.
V304	When sending the first UE CAPABILITY INFORMATION message.	Upon expiry of T304	When V304 > N304 the UE initiates the Cell update procedure
V308	When sending the first RRC CONNECTION RELEASE COMPLETE message in a RRC connection release procedure.	Upon expiry of T308	When V308 > N308 the UE stops re-transmitting the RRC CONNECTION RELEASE COMPLETE message.
V310	When sending the first PUSCH CAPACITY REQUEST message in a PUSCH capacity request procedure	Upon expiry of T310	When V310 > N310 the UE stops re-transmitting the PUSCH CAPACITY REQUEST message.

13.3 UE constants and parameters

Constant	Usage
N300	Maximum number of retransmissions of the RRC CONNECTION REQUEST message
N302	Maximum number of retransmissions of the CELL UPDATE / URA UPDATE message
N304	Maximum number of retransmissions of the UE CAPABILITY INFORMATION message
N308	Maximum number of retransmissions of the RRC CONNECTION RELEASE COMPLETE message
N310	Maximum number of retransmission of the PUSCH CAPACITY REQUEST message
N312	Maximum number of "in sync" received from L1.
N313	Maximum number of successive "out of sync" received from L1.
N315	Maximum number of successive "in sync" received from L1 during T313 is activated.

13.4 UE variables

13.4.ob AM_RLC_ERROR_PENDING_RB234

This variable indicates whether an AM RLC unrecoverable error has been detected during the current cell update procedure on RB 2, 3, or 4.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
AM RLC error pending	MP		Boolean	TRUE means an unrecoverable error was detected on AM RLC during the current cell update procedure.. Set to FALSE when the cell update procedure is completed.

13.4.oc AM_RLC_ERROR_PENDING_RB5_AND_UP

This variable indicates whether an AM RLC unrecoverable error has been detected during the current cell update procedure on RB 5 or above.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
AM RLC error pending	MP		Boolean	TRUE means an unrecoverable error was detected on AM RLC during the current cell update procedure.. Set to FALSE when the cell update procedure is completed.

13.4.0 CELL_INFO_LIST

This variable contains cell information on intra-frequency, inter-frequency and inter-RAT cells, as received in messages System Information Block Type 11, System Information Block Type 12, and MEASUREMENT CONTROL.

The first position in Intra-frequency cell info list corresponds to Intra-frequency cell id 0, the second to Intra-frequency cell id 1, etc.

The first position in Inter-frequency cell info list corresponds to Inter-frequency cell id 0, the second to Inter-frequency cell id 1, etc.

The first position in Inter-RAT cell info list corresponds to Intra-frequency cell id 0, the second to Inter-RAT cell id 1, etc.

This variable shall be cleared at cell re-selection, when leaving UTRA RRC connected mode, when switched off as well as at selection of a new PLMN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Intra-frequency cell info	OP	1..<maxCellMeas>			
>CHOICE *position status*	MP				
>>Occupied					
>>>Cell info	MP		Cell info 10.3.7.2		
>>Vacant				No data	
Inter-frequency cell info	OP	1..<maxCellMeas>			
>CHOICE *position status*	MP				
>>Occupied					
>>>Frequency info	MP		Frequency info 10.3.6.36		
>>>Cell info	MP		Cell info 10.3.7.2		
>>Vacant				No data	
Inter-RAT cell info list	OP				REL-5
>Inter-RAT cell info	OP	1..<maxCellMeas>			
>>CHOICE *position status*	MP				
>>>Occupied					
>>>>CHOICE *Radio Access Technology*					
>>>>>GSM					
>>>>>>Cell selection and re-selection info	MP		Cell selection and re-selection info for SIB11/12 10.3.2.4		
>>>>>>BSIC	MP		BSIC 10.3.8.2		
>>>>>>BCCH ARFCN	MP		Integer (0..1023)	[43]	
>>>>>IS-2000					
>>>>>>System specific measurement info			enumerated (frequency, timeslot, colour code, output power, PN offset)	For IS-2000, use fields from TIA/EIA/IS-2000.5, subclause 3. 7.3.3.2.27, *Candidate Frequency Neighbour List Message*	
>>>Vacant				No data	
>CHOICE *indication status*	MP				REL-5
>>*Present*					REL-5
>>>Inter-RAT cell info indication	OP		Integer (0..3)		REL-5
>>*Not present*				No data	REL-5

13.4.00 Void

13.4.0a CELL_UPDATE_STARTED

This variable indicates whether a cell update or URA update procedure is in progress.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Cell update started	MP		Boolean	TRUE means a cell or URA update procedure is in progress. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.1 CIPHERING_STATUS

This variable contains information about the current status of ciphering in the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Status for each CN domain	MP	<1 to maxCNDomains>		
>CN domain identity	MP		CN domain identity 10.3.1.1	
>Status	MP		Enumerated(Not started, Started)	Set to "Not started" when entering UTRA RRC connected mode. Set to "Not started" when leaving UTRA RRC connected mode.
Reconfiguration	MP		Boolean	TRUE means an RRC procedure performing reconfiguration of ciphering is ongoing. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.2 Void

13.4.2a CONFIGURATION_INCOMPLETE

This variable indicates whether a received measurement control message contains invalid an incomplete measurement configuration.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Configuration incomplete	MP		Boolean	TRUE: An incomplete configuration has been detected. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.3 C_RNTI

This variable stores the assigned C-RNTI for this UE when in CELL_FACH state.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
C-RNTI	OP		C-RNTI 10.3.3.8	Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.

13.4.3o DSAC_PARAM

This variable contains Domain Specific Access Restriction Parameters during the connected mode.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CS Domain Specific Access Restriction	MP		Domain Access Restriction 10.3.1.3b	This IE contains CS Domain Specific Access Restriction Parameters	REL-6
PS Domain Specific Access Restriction	MP		Domain Access Restriction 10.3.1.3b	This IE contains PS Domain Specific Access Restriction Parameters	REL-6

13.4.3a DSCH_RNTI

In TDD this variable stores the assigned DSCH-RNTI for this UE when in CELL_DCH state.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
DSCH-RNTI	OP		DSCH-RNTI 10.3.3.9a	Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.

13.4.4 Void

13.4.4o E_DCH_TRANSMISSION

This variable indicates whether E-DPDCH and E-DPCCH transmission procedures are ongoing. See subclause 8.5.28 for actions related to the setting of this variable.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
E-DCH transmission	MP		Boolean	TRUE: E-DCH transmission is ongoing. Set to FALSE when entering UTRA RRC connected mode when not otherwise stated in the procedure. Set to FALSE when leaving UTRA RRC connected mode.	REL-6

13.4.4a E_RNTI

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Primary E-RNTI	OP		E-RNTI 10.3.3.10a	Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.	REL-6
Secondary E-RNTI	OP		E-RNTI 10.3.3.10a	Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.	REL-6

13.4.5 ESTABLISHED_RABS

This variable is used to store information about the established radio access bearers and signalling radio bearers in the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
RAB information	OP	1 to <maxRABsetup>		For each RAB established. Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.
>RAB info	MP		RAB info 10.3.4.8	
>RB information	MP	1 to <maxRBper RAB>		For each RB belonging to the RAB
>>RB identity	MP		RB identity 10.3.4.16	
>>Subflow	MP		Integer(0..<	Reference to the RAB subflow

Information Element/Group name	Need	Multi	Type and reference	Semantics description
			maxSubflow count>)	implemented by this RB
>>RB started	MD		Enumerated(stopped, started)	Default value is started
Signalling radio bearer information	OP	1 to < maxSRBsetup>		In the order of RB0 and upwards. Cleared when leaving UTRA RRC connected mode.
>RB started	MD		Enumerated(stopped, started)	Default value is started

13.4.5a ESTABLISHED_SIGNALLING_CONNECTIONS

This variable is used to store information about established signalling connections.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Signalling connection list	OP	1 to <maxCNdomains>		For each established signalling connection. Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.
>Signalling connection identity	MP		CN domain identity 10.3.1.1	

13.4.6 ESTABLISHMENT_CAUSE

This variable is used to store the cause for establishment of a signalling connection received by upper layers, to be used at RRC connection establishment or Initial Direct Transfer.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Establishment cause	OP		Establishment cause 10.3.3.11	Cleared when leaving UTRA RRC connected mode.

13.4.7 FAILURE_CAUSE

This variable contains the cause for failure of a UE initiated procedure, to be reported in a retransmitted message.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Failure cause	OP		Failure cause 10.3.3.13	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.

13.4.8 FAILURE_INDICATOR

This variable indicates whether the procedure has failed for a UE initiated procedure.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Failure indicator	MP		Boolean	TRUE: Procedure has failed. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.8o H_RNTI

This variable stores the assigned H-RNTI for this UE when in CELL-DCH state and a HS-DSCH transport channel has been allocated.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
H-RNTI	OP		H-RNTI 10.3.3.14a	Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.	REL-5

13.4.8oo HS_DSCH_RECEPTION

This variable indicates whether HS-SCCH and HS-DSCH reception procedures are ongoing. See subclause 8.5.25 for actions related to the setting of this variable.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
HS-DSCH reception	MP		Boolean	TRUE: HS-DSCH reception is ongoing. Set to FALSE when entering UTRA RRC connected mode when not otherwise stated in the procedure. Set to FALSE when leaving UTRA RRC connected mode.	REL-5

13.4.8a INCOMPATIBLE_SECURITY_RECONFIGURATION

This variable indicates whether an incompatible simultaneous reconfiguration of a security function has been received.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Incompatible security reconfiguration	MP		Boolean	TRUE: An incompatible simultaneous security reconfiguration has been detected. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.9 INITIAL_UE_IDENTITY

In this variable the identity used by the UE when establishing an RRC connection is stored.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Initial UE identity	OP		Initial UE identity 10.3.3.15	Cleared when leaving UTRA RRC connected mode.

13.4.9a INTEGRITY_PROTECTION_ACTIVATION_INFO

This variable contains information to be sent to UTRAN about when a new integrity protection configuration shall be activated in the uplink for signalling radio bearers in case of modification of integrity protection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Uplink Integrity protection activation info	OP		Integrity protection activation info 10.3.3.17	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.

13.4.10 INTEGRITY_PROTECTION_INFO

This variable contains information about the current status of the integrity protection in the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Status	MP		Enumerated(Not started, Started)	Set to "Not started" when entering UTRA RRC connected mode. Set to "Not started" when leaving UTRA RRC connected mode.
Reconfiguration	MP		Boolean	TRUE means a reconfiguration of integrity protection is ongoing. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.
Signalling radio bearer specific integrity protection information	OP	1 to <maxSRBsetup>		When integrity protection is started, status information for RB0- RB4 in that order. Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.
>Uplink RRC HFN	MP		Bit string (28)	

Information Element/Group name	Need	Multi	Type and reference	Semantics description
>Downlink RRC HFN	MP		Bit string (28)	
>Uplink RRC Message sequence number	MP		Integer (0.. 15)	
>Downlink RRC Message sequence number	OP		Integer (0.. 15)	

13.4.10a INTER_RAT_HANDOVER_INFO_TRANSFERRED

This variable stores information about the inter RAT handover info that has been transferred to another RAT.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Predefined configuration status information	OP		Predefined configuration status information 10.3.4.5a	Cleared upon entering connected mode in another RAT	
Predefined configuration status information compressed	OP		Predefined configuration status information compressed 10.3.4.5b	Cleared upon entering connected mode in another RAT	REL-5
UE security information	OP		UE security information 10.3.3.42b	Cleared upon entering connected mode in another RAT	
UE security information2	OP		UE security information2 10.3.3.42c	Cleared upon entering connected mode in another RAT	REL-6
UE radio access capability	OP		UE radio access capability 10.3.3.42	Cleared upon entering connected mode in another RAT	
UE radio access capability extension	OP		UE radio access capability extension 10.3.3.42a	Cleared upon entering connected mode in another RAT	
UE radio access capability compressed	OP		UE radio access capability compressed 10.3.3.42o		REL-5
UE system specific capability	OP	1 to <maxSystemCapability>	Inter-RAT UE radio access capability 10.3.8.7	Cleared upon entering connected mode in another RAT	
>Inter-RAT UE radio access capability	MP		Inter-RAT UE radio		

			access capability 10.3.8.7		

13.4.11 INVALID_CONFIGURATION

This variable indicates whether a received message contained an invalid configuration, by means of invalid values or invalid combinations of information elements.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Invalid configuration	MP		Boolean	TRUE: An invalid configuration has been detected. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.11a LATEST_CONFIGURED_CN_DOMAIN

This variable stores the CN-domain that was most recently configured to be used for ciphering and integrity protection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Latest configured CN domain	OP		CN domain identity 10.3.1.1	Cleared when entering UTRA RRC connected mode when not stated otherwise in the procedure. Cleared when leaving UTRA RRC connected mode.

13.4.11b LATEST_CONFIGURED_SRB_DELAY_AND_PC_PREAMBLE

This variable stores the SRB delay and PC preamble to be used for establishing the DPCH after failure of hard handover, inter-RAT handover from UTRAN, or cell change order from UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SRB delay	OP		Integer (0..7)	Cleared when entering UTRA RRC connected mode when not stated otherwise in the procedure.
PC preamble	OP		Integer (0..7)	Cleared when entering UTRA RRC connected mode when not stated otherwise in the procedure.

13.4.11c MBMS_ACTIVATED_SERVICES

This variable stores the MBMS multicast services the UE has joined as well as the MBMS broadcast services the UE is interested to receive. Whenever the list of joined multicast services and/ or interested broadcast services changes, upper layers provide an indication upon which the UE shall update the variable accordingly. In case upper layers de-select an MBMS Selected Services, the UE shall remove the concerned service from the variable. Likewise, when upper layers select an MBMS Selected Services, the UE shall add the concerned service to the variable.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Activated service list	OP	1 to <maxMBMS-Services>		
>Service Identity	MP		MBMS Service identity 10.3.9a.8	
>Service type	MP		Enumerated (Multicast, Broadcast)	
>MBMS Selected Services Indicator	CV-*Broadcast*		Boolean	TRUE means that the service is currently a MBMS Selected Service

Condition	Explanation
Broadcast	This IE is mandatory present if the IE "Service type" is set to 'Broadcast' and not needed otherwise.

13.4.11d MBMS_PREV_FREQUENCY_INFO

This variable stores the frequency information of the cell the UE is camped on, upon moving to the MBMS preferred layer indicated MBMS FLC preferred frequency information.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
PREV Frequency Information					
CHOICE *mode*					
>FDD cell					
>>UARFCN downlink (Nd)	MP		Integer(0 .. 16383)	[21]	
>3.84 Mcps TDD cell					
>>UARFCN (Nt)	MP		Integer(0 .. 16383)	[22]	
>1.28 Mcps TDD cell list					
>>UARFCN (Nt)	MP		Integer(0 .. 16383)	[22]	

13.4.11e MBMS_PL_SERVICE_RESTRICTION_INFO_DEDICATED

This variable stores the value of the IE "MBMS PL Service Restriction Information" restriction applicable to preferred frequency received in the latest Radio Bearer Control or Cell Update Confirm message.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
MBMS_PL_SERVICE_RESTRICTION_INFO_DEDICATED	MP		Enumerated(TRUE, FALSE)	Set to FALSE when entering UTRA connected mode.	REL-6

13.4.12 MEASUREMENT_IDENTITY

This variable stores the measurements configured in the UE. For each configured measurement, the information below shall be stored.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
MEASUREMENT CONTROL	OP		MEASUREMENT CONTROL 10.2.17, System Information Block type 11 10.2.48.8.12, System Information Block type 12 10.2.48.8.13	Information as contained in these messages. Cleared when entering UTRA RRC connected mode when not stated otherwise in the procedure (8.4.1.8-8.4.1.9). Cleared when leaving UTRA RRC connected mode when not stated otherwise in the procedure (8.4.1.9a).

13.4.13 Void

13.4.14 ORDERED_RECONFIGURATION

This variable stores information about an ongoing Reconfiguration procedure.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Ordered reconfiguration	MP		Boolean	TRUE means that a Reconfiguration procedure is ongoing. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.14a PDCP_ROHC_TARGET_MODE

This variable contains the ROHC target mode.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Target Mode	OP		Enumerated (O-mode, R-mode)	The UE shall only transit to the signalled mode for operation of ROHC as decribed in [36].	REL-5

13.4.15 PDCP_SN_INFO

This variable contains PDCP receive sequence numbers for one or several radio bearers to be included in a response message to UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
RB with PDCP information list	OP	1 to <maxRBallRABs>		Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.
>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	

13.4.15a PHYSICAL_SHARED_CHANNEL_CONFIGURATION

This variable is used only for TDD to store information about the physical shared channel configuration in the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
PUSCH configuration	OP			Cleared when entering and leaving UTRA RRC connected mode.
>PUSCH info	MP		PUSCH info 10.3.6.63	
>PUSCH Identity	OP		Integer(1..hiPUSCHidentities)	
>PUSCH power control info	OP		PUSCH power control info 10.3.6.65	
PDSCH configuration	OP			Cleared when entering and leaving UTRA RRC connected mode.
>PDSCH Info	MP		PDSCH Info 10.3.6.44	
>PDSCH Identity	OP		Integer(1..hiPDSCHidentities)	
>PDSCH power control info	OP		PDSCH power control info 10.3.6.45	
ISCP Timeslot list	OP	1 to maxTS		Cleared when entering and leaving UTRA RRC connected mode.
>Timeslot number	MP		Timeslot number 10.3.6.84	Timeslot numbers, for which the UE shall report the timeslot ISCP in PUSCH CAPACITY REQUEST message

13.4.16 PROTOCOL_ERROR_INDICATOR

This variable indicates whether there exist a protocol error that is to be reported to UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Protocol error indicator	MP		Protocol error indicator 10.3.3.27	Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.17 PROTOCOL_ERROR_INFORMATION

This variable contains diagnostics to be reported to UTRAN for a message that was not completely understood.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Protocol error information	OP		Protocol error information 10.3.8.12	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.

13.4.18 PROTOCOL_ERROR_REJECT

This variable indicates whether there has occurred a severe protocol error causing the ongoing procedure to fail.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Protocol error reject	MP		Boolean	TRUE: a severe protocol error has occurred. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.19 RB_TIMER_INDICATOR

This variable contains information to be sent to UTRAN if any of the timers T314 or T315 has expired when the UE sends a cell update with cause RL failure.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
RB timer indicator	OP		RB timer indicator 10.3.3.28	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.

13.4.20 RB_UPLINK_CIPHERING_ACTIVATION_TIME_INFO

This variable contains information to be sent to UTRAN about when a new ciphering configuration shall be activated in the uplink for radio bearers using RLC-AM or RLC-UM.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
RB uplink ciphering activation time info	OP		RB activation time info 10.3.4.13	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.

13.4.20a SECURITY_MODIFICATION

This variable contains information on which CN domain is affected by the ongoing security reconfiguration.

Information Element/Group name	Need	Multi	Type and reference	Semantics description

Status for each CN domain	MP	<1 to maxCNDomains>		
>CN domain identity	MP		CN domain identity 10.3.1.1	
>Status	MP		Enumerated(Affected, Not Affected)	

13.4.21 Void

13.4.22 START_THRESHOLD

This variable contains information about the maximum allowed value of the START for a CN domain.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
THRESHOLD	OP		Integer (0..1048576)	20 bits. Cleared when entering UTRA RRC connected mode when not stated otherwise in the procedure. Cleared when leaving UTRA RRC connected mode.

13.4.23 START_VALUE_TO_TRANSMIT

This variable contains the value of START for new radio bearer(s) to be transmitted in a response message.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
START	OP		START 10.3.3.38	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.

13.4.24 TFC_SUBSET

This variable contains information about the TFC subset(s) applicable to the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE *mode*	MP				
>FDD					
>>Current TFC subset	MP		Transport Format Combination Subset 10.3.5.22	Set to "Full transport format set" when entering UTRA RRC connected mode when not stated otherwise in the procedure.	
>>Duration	OP		TFC Control duration 10.3.6.80	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.	
>>Default TFC subset	OP		Transport Format Combinati	The TFC subset to go back to when any temporary limitation is	

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			on Subset 10.3.5.22	released. Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.	
>>TFC subset list	MP	1 to <maxTFCsub>			REL-4
>>>TFC subset	MP		Transport Format Combination Subset 10.3.5.22		REL-4
>TDD					
>>TFCS list	MP	1 to < maxCCTrCH >		One TFCS is created when entering UTRA RRC connected mode when not stated otherwise in the procedure.	
>>>TFCS identity	MP		Transport Format Combination Set Identity 10.3.5.21	"TFCS ID" is set to 1 when entering UTRA RRC connected mode when not stated otherwise in the procedure. "Shared channel indicator" is set to FALSE when entering UTRA RRC connected mode when not stated otherwise in the procedure.	
>>>Current TFC subset	MP		Transport Format Combination Subset 10.3.5.22	Set to "Full transport format set" when entering UTRA RRC connected mode when not stated otherwise in the procedure.	
>>>>Duration	OP		TFC Control duration 10.3.6.80	Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.	
>>>>Default TFC subset	OP		Transport Format Combination Subset 10.3.5.22	The TFC subset to go back to when any temporary limitation is released. Cleared when entering UTRA RRC connected mode. Cleared when leaving UTRA RRC connected mode.	