

(19) **United States**(12) **Patent Application Publication**
Liu(10) **Pub. No.: US 2006/0188031 A1**(43) **Pub. Date: Aug. 24, 2006**(54) **INTELLIGENT DEMODULATION SYSTEMS
AND METHODS IN AN OFDMA MULTICELL
NETWORK****Publication Classification**(51) **Int. Cl.****H04K 1/10** (2006.01)**H04L 27/22** (2006.01)(52) **U.S. Cl.** **375/260; 375/316**


(57)

ABSTRACT

An OFDMA communication system includes a plurality of terminals, with at least one of the terminals including at least one type of multi-user decoder adapted to decode a signal intended for the at least one terminal received on a subchannel of the system and adapted to decode at least a portion of an interfering signal received on the subchannel. The system also includes a plurality of base stations. Each of the base stations may be in communication with others of the base stations for exchanging information about data throughput for particular terminals in cells of the system using particular subchannels in the cells. Each of the base stations assigns the subchannels to terminals in the cell of the base station so as to maximize data throughput in the entire system.

(75) Inventor: **Hui Liu**, Sammamish, WA (US)

Correspondence Address:

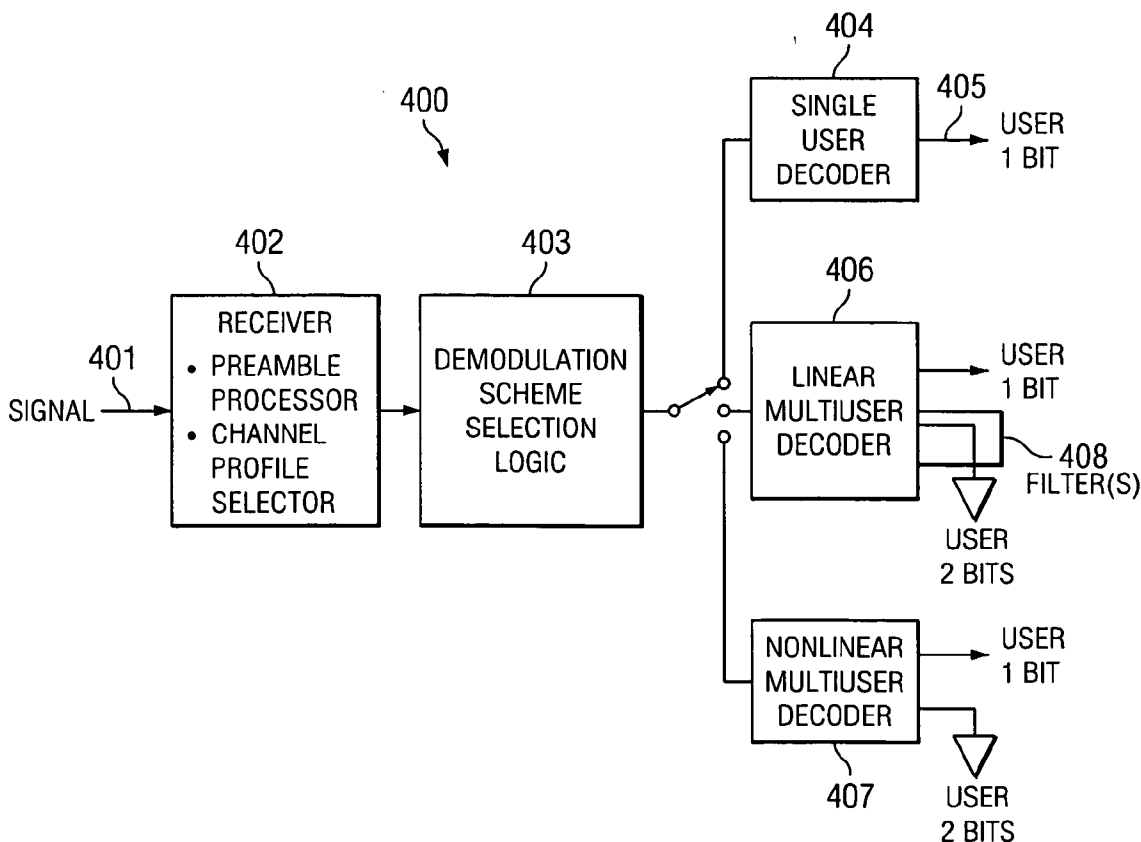**DALLAS OFFICE OF FULBRIGHT &
JAWORSKI L.L.P.****2200 ROSS AVENUE****SUITE 2800****DALLAS, TX 75201-2784 (US)**(73) Assignee: **Adaptix, Inc.**, Seattle, WA(21) Appl. No.: **11/062,890**(22) Filed: **Feb. 22, 2005**

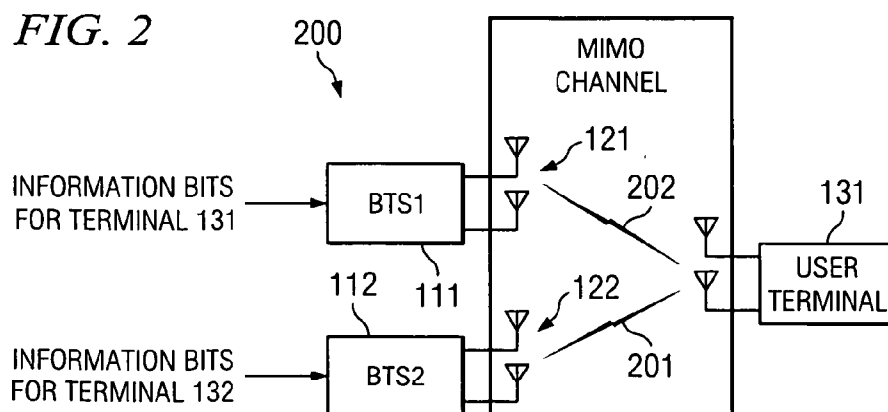
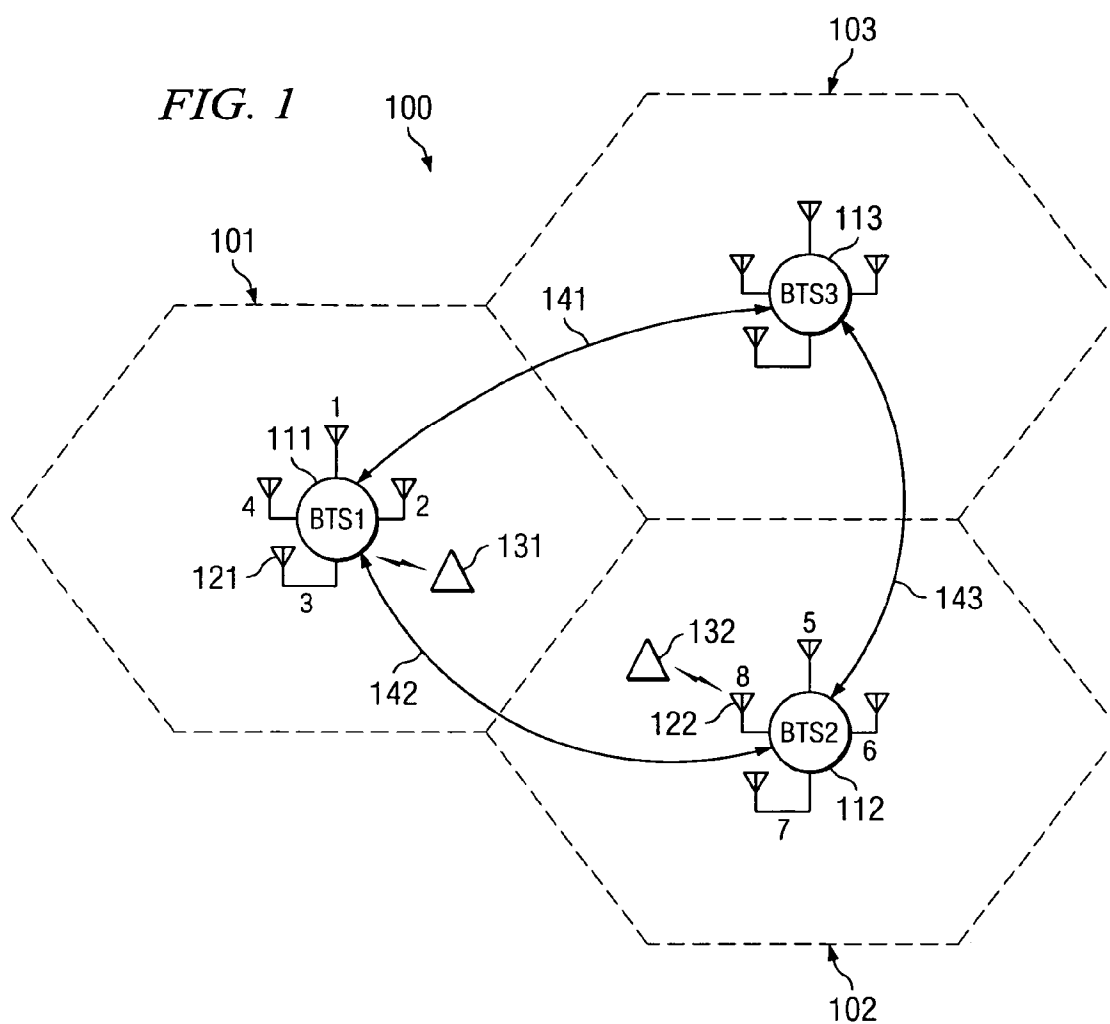


FIG. 3

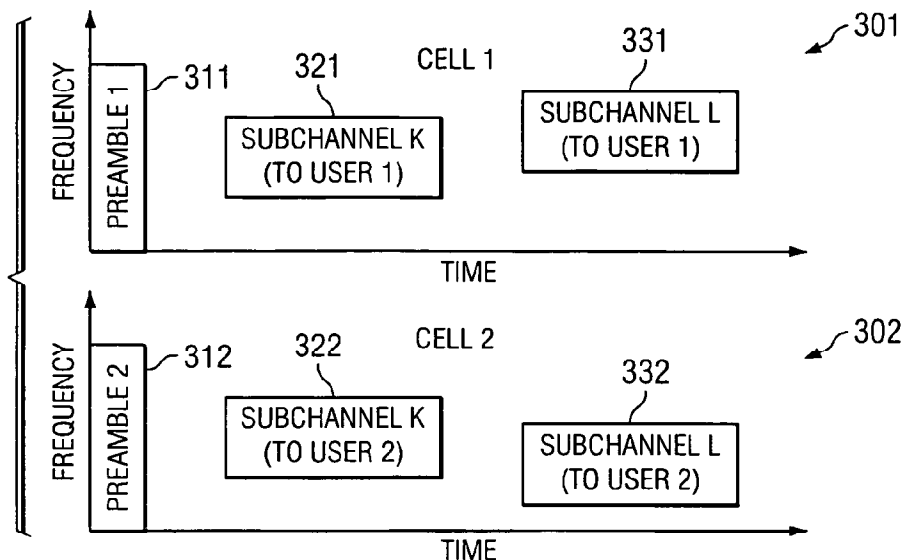
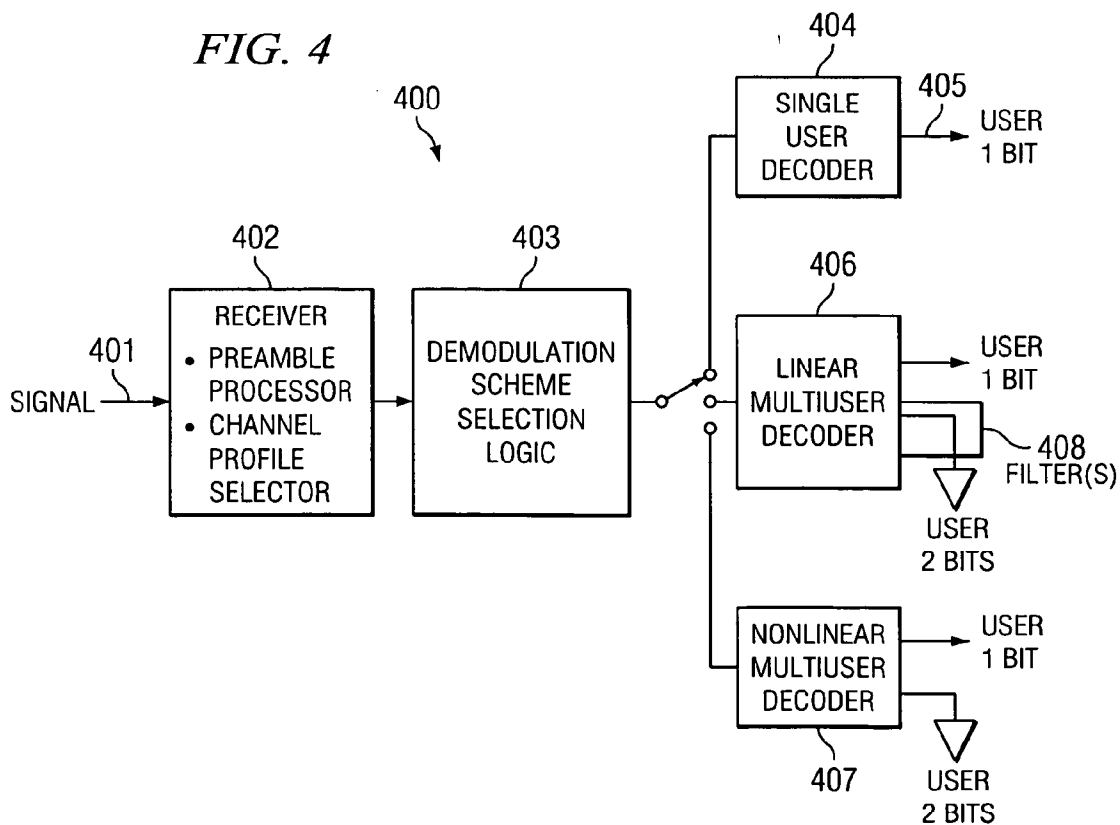


FIG. 4



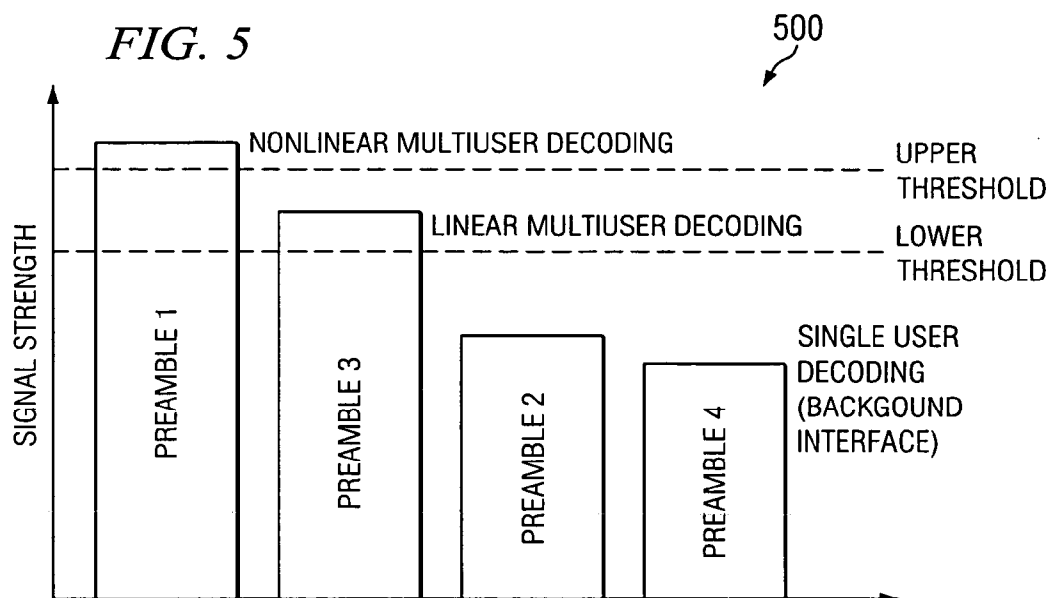


FIG. 6

ACHIEVABLE DATA RATE [BITS/S/HZ]	SINGLE USER DECODING	MULTIUSER DECODING
TERMINAL A	2	3
TERMINAL B	1	5
TERMINAL C	3	3
◦ ◦ ◦ ◦	◦ ◦ ◦ ◦	◦ ◦ ◦ ◦

FIG. 7

CELL 1				CELL 2			CELL N		
ACHIEVABLE DATA RATE [BITS/S/HZ]	SINGLE USER DECODING	MULTIUSER DECODING	ACHIEVABLE DATA RATE [BITS/S/HZ]	SINGLE USER DECODING	MULTIUSER DECODING	ACHIEVABLE DATA RATE [BITS/S/HZ]	SINGLE USER DECODING	MULTIUSER DECODING	
TERMINAL (1,A)	2	3	TERMINAL (2,A)	0	2	TERMINAL (N,A)	4	4	
TERMINAL (1,B)	1	5	TERMINAL (2,B)	2	3	TERMINAL (N,B)	2		2
TERMINAL (1,C)	3	3	TERMINAL (2,C)	2	3	TERMINAL (N,C)	1	3	
o o o	o o o	o o o	o o o	o o o	o o o	o o o	o o o	o o o	

INTELLIGENT DEMODULATION SYSTEMS AND METHODS IN AN OFDMA MULTICELL NETWORK

TECHNICAL FIELD

[0001] The present invention is broadly related to wireless communication systems, and specifically to systems and methods for intelligent terminal side demodulation in an Orthogonal Frequency Division Multiple Access (OFDMA) network.

BACKGROUND OF THE INVENTION

[0002] Most current multi-cell wireless communication systems are Time Division Multiple Access (TDMA) or Code Division Multiple Access (CDMA) based. In such wireless communication systems, particularly CDMA based systems where terminals are employing differing codes, the terminals often experience and hear intracell interference, as well as other interference from neighboring cells. Herein, interference received from other cells will be referred to as intercell interference or a leakage signal. Intracell interference may be created by a terminal itself and/or by transmissions to or from other terminals in a cell.

[0003] OFDMA is a highly flexible multiple-access scheme based on Orthogonal Frequency Division Multiplexing (OFDM) technology. OFDMA is the predominant multiple-access scheme of choice for beyond 3G (B3G) generation broadband wireless systems. The major benefits of OFDMA include simplicity, high scalability, fine granularity, and capacity-achieving performance. In OFDMA, the multiple-access is not only accommodated in the time domain, but also in the frequency domain. OFDMA is similar to conventional Frequency-Division Multiplexing (FDM) in that different terminals occupy different subchannels. The difference lies in the manner in which spectrum is allocated and in how signals are modulated and demodulated. In OFDMA priority is given to minimizing the interference, or crosstalk, among the channels and symbols comprising the data stream. Typically, less importance is placed on perfecting individual channels. OFDMA employs a very broad bandwidth, such as 5 MHz. Each terminal within a cell will use a certain portion of the bandwidth, such as by way of example 10 kHz. An OFDMA band employs numerous narrow frequency bands, referred to as sub-carriers, using Fast Fourier Transform (FFT) techniques. Typical OFDMA systems group a number of the sub-carriers into a subchannel. For example, 64 sub-carriers may be grouped into a subchannel. Within a cell, every terminal will occupy a different set of orthogonal subchannels in a non-overlapping fashion, relative to other terminals in the cell. As a result there is little or no intracell interference in OFDMA. This is a great advantage of OFDMA. Terminals have a clean channel and can transmit, using adaptive modulations, as fast as possible based on the terminal's subchannel's Received Signal Strength Indication (RSSI) and/or the like.

[0004] However, while there is no intracell interference in multi-cell systems employing OFDMA, a terminal will hear interference from other cells using the same subchannel as the terminal. As note above such interference may be referred to as intercell interference or a leakage signal. Typically, existing systems have used one of two categories

of solutions in an attempt to address this problem. One is to use sectorization, as in a Global System for Mobile Communications (GSM) system, OFDMA based systems may try to reduce or at least suppress intercell interference by orienting the different antenna patterns and/or by using different frequencies, for sectors from two cells pointing to each other. However, this interference mitigation technique reduces overall system capacity, in that the subchannels that can be used in particular areas of a cell at any particular time is typically reduced.

[0005] The second approach for mitigating intracell interference in typical OFDMA systems has been to employ subchannel patterns which "hop" over time. This subchannel may hop across the sub-carriers of the 5 Mhz bandwidth of the OFDMA band, with hopping patterns in different cells of a system being different. In this way a certain degree of so-called interference averaging is achieved. In effect, occasionally a "direct hit," for terminals from different cells using a same sub-carrier, may be encountered. However, in a next time slot, because the different cells use a different hopping pattern, a direct hit is avoided. The randomized, "smoothed" interference pattern resulting may be treated like other background interference. However, a best case situation, where there are no hits at all, will not typically result. Therefore, a problem exists with the latter prior intercell interference mitigation technique for multi-cell OFDMA systems in that by eliminating the worst case scenario of sequential direct hits, the best case scenario of no hits is not available. Some OFDMA systems using an interference averaging approach to deal with the intercell interference manage the interference by sometimes combining interference together, and sometimes separating the interference. Generally, interference averaging improves the worst-case performance of the system at the expense of lower network capacity.

SUMMARY

[0006] The present invention is directed to systems and methods which employ intelligent demodulation in an OFDMA multicell network, at the terminal, to mitigate intercell interference. The present systems and methods seek to the avoid network capacity loss associated with interference averaging by exploiting the structure information of the inference at the terminal. In contrast to existing OFDMA systems and methods, embodiments of the present invention overlaps, preferably fully overlaps, subchannels used by adjacent cells such that terminals of the present systems and methods receive both intended signals and interfering signals in a multiple input, multiple output (MIMO) fashion. Embodiments of terminals of the present systems and methods employ a multi-user decoding approach to eliminate the interference by using powerful decoding schemes. By overlapping the interferences, embodiments of the present invention, based on the channel and the interference information, enables cells to assign subchannels in such a manner as to maximize data throughput. This subchannel assignment may be made in a coordinated fashion, such as may be facilitated by intercommunication between base stations of a system employing the present invention.

[0007] Embodiments of an OFDMA terminal of the present invention may include a preamble processor that receives a preamble signal broadcast by the terminal's home base-station plus preamble signals broadcast by neighboring

base-stations, a receiver that receives signal intended for the terminal and at least one interfering signal on a subchannel of the OFDMA wireless communication system, a single user decoder that is preferably adapted to decode only the intended signal, and one or more multi-user decoders, adapted to decode the intended signal and at least a portion of the interfering signal. The multi-user decoders may include a linear multi-user decoder and/or a non-linear multi-user decoder. The terminal also preferably includes demodulation scheme selection logic that selects between the single user decoder, the linear multi-user decoder and the non-linear multi-user decoder for demodulating/decoding the intended signal. This selection may be based, at least in part, on a strength of the interfering signal, relative to a strength of the intended signal. The aforementioned decoders may also be referred to as “detectors” or “demodulators.”

[0008] The preamble processor may be used to derive a preamble of the intended signal and a preamble of the interfering signal, if possible. The selection between the single user decoder, the linear multi-user decoder and the non-linear multi-user decoder for demodulating the intended signal may also or alternatively, be based on information from the preamble derived from the interfering signal, such as. For example, the information from the preambles derived from the interfering signal may be used to determine if the linear multi-user decoding can satisfactorily decode the intended signal. In accordance with embodiments of the present invention, in addition to preambles, previously demodulated signal(s) may be used (together with the preamble signals) to select between signal and multi-user decoders.

[0009] The linear multi-user decoder may include a filter used to filter out the decoded interfering signal. This filter may include a filter set based on a data structure of the interfering signal. Additionally or alternatively, the terminal may use beam forming to form an antenna pattern for the terminal with a null directed toward a base station or terminal transmitting the interfering signal. The source transmitting the interfering signal may be identified from the derived preamble of the interfering signal. The non-linear multi-user decoder of at least one embodiment is adapted to decode all of the interfering signal and then discard the decoded interfering signal when it is selected by the demodulation scheme selection logic to decode the intended signal.

[0010] Embodiments of base stations of the present invention preferably overlap subchannels used by a first cell of an OFDMA wireless communication system with subchannels used by at least one other cell of the OFDMA system in such a manner as to present any interfering signal appearing in said at least one other cell as a signal that overlaps a signal intended for use by a terminal of the first cell. The terminals may employ the aforementioned multi-user decoding to decode both a signal intended for the terminal and at least a portion of any interfering signal(s) on the same subchannel as the intended signal, and use the decoded interfering signal to improve decoding of the intended signal, such as by canceling the interfering signal.

[0011] An embodiment of an OFDMA communication system of the present invention may employ at least one of the aforementioned terminals and a plurality of the aforementioned base stations. Preferably, each of the base stations

in communication with others of the base stations for exchanging information about data throughput for particular terminals in cells of the system using particular subchannels in the cells. Preferably, each of the base stations assigns the subchannels to terminals in the cell of the base station so as to maximize data throughput in the system. Each of the base stations may assign use of the subchannels to terminals in their cells which have the highest data throughput for the subchannel. However, other considerations may influence assignment, or nonassignment, of subchannels by a particular base station. For example, at least one of the base stations might not assign a particular subchannel for use in its cell because use of the subchannel by the base station would interfere with one or more terminals using the subchannel in a neighboring cell or because use of the subchannel by the at least one base station would prevent use of the subchannel in one or more neighboring cells. In accordance with embodiments of the present invention, centralized subchannel assignment among base stations can be used to maximize the total network throughput.

[0012] The foregoing has outlined rather broadly the features and technical advantages of the present invention in order that the detailed description of the invention that follows may be better understood. Additional features and advantages of the invention will be described hereinafter which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and specific embodiment disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims. The novel features which are believed to be characteristic of the invention, both as to its organization and method of operation, together with further objects and advantages will be better understood from the following description when considered in connection with the accompanying figures. It is to be expressly understood, however, that each of the figures is provided for the purpose of illustration and description only and is not intended as a definition of the limits of the present invention.

BRIEF DESCRIPTION OF THE DRAWING

[0013] For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawing, in which:

[0014] **FIG. 1** is a diagrammatic view of an OFDMA based wireless communication system adapted in accordance with the present invention;

[0015] **FIG. 2** is block diagram illustrating how a terminal receives intercell interference in **FIG. 1**;

[0016] **FIG. 3** is a diagram illustrating how channels may be overlapped in an OFDMA wireless communication system;

[0017] **FIG. 4** is a logic flow diagram illustrating an embodiment of demodulation logic used in the present invention;

[0018] **FIG. 5** is a diagram illustrating thresholding in terminal joint decoding in accordance with embodiments of the present invention;

[0019] **FIG. 6** shows subchannel assignment by a single base station in accordance with embodiments of the present invention; and

[0020] **FIG. 7** shows subchannel assignment in a multi-cell system in accordance with embodiments of the present invention.

DETAILED DESCRIPTION

[0021] **FIG. 1** is a diagrammatic view of at least a portion of multi-cell OFDMA based wireless communication system 100 employing the present systems and methods. Each cell, 101, 102 and 103, has a corresponding base station, 111, 112 and 113, respectively. Each cell may have multiple sectors, with each sector serviced by one or more antennas or antenna arrays of a base station, such as antenna 121 of base station 111 and antenna 122 of base station 112. Multiple antennas or antenna arrays may be used by base stations 111, 112 and 113 to provide beam forming, diversity transmission and reception, and the like. Base station 111 is shown in communication with terminal 131. For purposes of illustrating the present systems and methods, subchannel K of system 100 is being used to communicate with terminal 131. However, base station 112 is in communication with terminal 132 and again for purposes of illustrating the present invention, is using the same subchannel K. As one of ordinary skill in the art would readily appreciate, it is highly probable that at least a portion of the RF signal from base station 111 on subchannel K will leak into cell 102 and at least a portion of the RF signal from base station 112 on subchannel K will leak into cell 101 and thus be received by terminal 131 as interference with its communication with base station 111. In accordance with the present invention base stations 111, 112 and 113 may be adapted to overlap subchannels as described in greater detail below and to assign subchannels to users in such a manner as to enhance overall system data throughput, as also discussed in greater detail below. Base stations 111, 112 and 113 may communicate via links 141, 142 and 143 to facilitate this channel assignment. Additionally, at least one terminal of embodiments of system 100 is adapted to receive and decode both signals intended for the terminal and at least a portion of interfering leakage signal(s) received on a same sub channel, and use information from the decoded interfering signal to improve decoding of the intended signal, as also described in greater detail below.

[0022] **FIG. 2** is block diagram of portion 200 of system 100 of **FIG. 1**, illustrating how a terminal, such as terminal 131, receives intercell interfering signal 201 in a multi-cell OFDMA wireless system. Without correction, the leakage of the RF signal from cell 102 using the same subchannel as data signal 202, intended for terminal 131, will be received as interference or background noise by terminal 131. Interfering signal 201 typically has a low signal to noise strength, relative to data signal 202. Interfering signal 201 typically affects terminal 131's data rate. Existing systems typically do not take advantage of knowledge of the neighboring cell. Signals originating from neighboring cells are typically considered part of the background noise and treated the same as other interference, using typical filtering, the aforementioned averaging techniques, or similar mitigation techniques. However, terminal 131 may be capable of actually receiving interfering signal 201, in addition to received data signal 202, transmitted from base station 112 and intended

for terminal 132 of **FIG. 1**. This results in a MIMO channel configuration, which combines all useful information. In this case multiple input means that multiple sources of information, such as both the intended signal 202 and the interfering leakage signal 201, are being received, such as by terminal 131; and multiple output means that a receiving terminal, such as terminal 131 may employ the received signals, both the intended signal 202 and the interfering leakage signal 201, as output data, at least internally. For example, in accordance with the present invention information contained in interfering signal 201 may be treated as information rather than just as interference, such as by using a multi-user decoder scheme or joint decoding scheme, as discussed in greater detail below, to decode the information from both the intended signal 202 and interfering leakage signal 201. Therefore, in accordance with embodiments of the present invention the second signal, interfering leakage signal 201, is not treated as interference, as is typically done in existing OFDMA systems. Rather, interfering signal 201 is treated as part of a received signal, which is comprised of intended signal 202 and interfering signal 201, and which is decoded using joint decoding considering all received signals of a similar nature, such as transmitted on subchannel K using OFDMA, as useful information.

[0023] **FIG. 3** is a time to frequency diagram illustrating how channels may be overlapped in an OFDMA wireless communication system. In **FIG. 3** time frequency representation 301 a first cell is shown for comparison with time frequency representation 302 of a second cell. In a cell, at the beginning of a time slot, preambles 311 and 312 are broadcast for the respective cells. The preamble carries a beacon signal or the like for the associated base station. Each base station has its own preamble beacon signal. Following transmission of the preamble, the various data subchannels occupy the available bandwidth in time and frequency. For the sake of illustration in **FIG. 3**, the rectangles are intended to represent a collection of time and frequency as an RF "resource" designated to certain terminals. However, the resources used by a subchannel may not be uniformly distributed over time and/or frequency. In block 321 of cell 1 and block 322 of cell 2, the resource or subchannels are identical, subchannel K. Therefore, resources 321 and 322 are overlapped in time and frequency, directly interfering with respect to each other. Subchannel L resource 331 of cell 1 and subchannel L resource 332 of cell 2 only partially overlap in frequency, but are shown as synchronized in time. Therefore, resources 331 and 332 only partially interfere with each other. Furthermore, resources may partially overlap in both frequency and time, also resulting in mutual interference.

[0024] **FIG. 4** is a logic flow diagram illustrating embodiment 400 of terminal demodulation logic, such as may be used in the present invention to enable higher overall system capacity in a system terminal, such as terminal 131. A terminal of the present invention receives signal 401, which may comprise both a signal intended for receipt by the terminal and interfering one or more interfering signals using a same subchannel. For example signal 401 may include both the signal intended for the terminal, such as signal 202 of **FIG. 2** from base station 111 intended for terminal 131, as well as the portion of signal 401 that is not intended for the terminal, such as may include interfering signal 201 from base station 112 intended for terminal 132. The present invention will usually receive more than just

two signals, a signal intended for the terminal and an interfering leakage signal. For example additional interfering leakage signals, might also be received, such as from base station 113 of FIG. 1 or from outside the OFDMA wireless system in which the terminal is operating. Preamble processor 402 will receive and process a preamble signal broadcast by the terminal's home base-station plus preamble signals broadcast by neighboring base-stations.

[0025] Channel profile selection may also be carried out in parallel with processing of the preamble. This channel profile selection may comprise comparing signal strength from a first source, such as a base station or other terminal, transmitting a signal intended to be received by the terminal, and at the same time monitoring signals from neighboring base stations. If the neighboring interference is very low, so as to be considered trivial, such as below a lower threshold or of insufficient strength to provide code information to the terminal, terminal demodulation scheme selection logic 403 may select to use single user decoder 404 to decode the signal intended for the user terminal. Single user decoder 404 preferably, ignores the interfering signal as a low strength background noise and/or treats the interfering signal in a manner such as other interference is treated. This results in an output of signal 405, the signal intended for the terminal, only. In accordance with the present invention terminals may also make use of multiple antennas for beam forming, diversity transmission and reception, and the like. For example, when using single user decoding, a terminal may "null out" a base station, in a manner known to those of skill in the art, to provide filtering.

[0026] On the other hand, if the interference from the preamble estimation of the interference signal strength provided by channel profile selector 402 is significant or strong, such as strong enough to provide code information, multi-user decoder 405 or 406 is preferably selected by demodulation scheme selection logic 403. Numerous multi-user decoders are known in the art. Two types of multi-user decoders are discussed herein and illustrated in FIG. 4, linear multi-user decoder 406, and a more powerful, non-linear multi-user decoder 407.

[0027] If the interference is above the aforementioned lower threshold, but not above an upper threshold, linear multi-user decoder 406 may be selected by demodulation scheme selection logic 403. One often-used scheme of linear multi-user decoding is commonly referred to as Minimum Mean Squared Error Multi-user Decoding (MMSE multi-user decoding). An MMSE multi-user decoder takes advantage of the data structure of the interfering signal, the interfering signal's algebraic structure. This data structure may be reflected in the signal's spatial structure, its coding structure, and/or the like. The MMSE multi-user decoder forms linear filter set 408, such as by forming coefficients, to filter out the interfering signal. Additionally, a terminal using linear multi-user decoding may null out a base station once it identifies the base station as the source of an interfering signal. Therefore, in accordance with embodiments of the present invention, when employing linear multi-user decoding the terminal need only decode the interfering signal long enough to derive filters 408, or long enough to identify the base station transmitting the intercell interference and thus the direction of intercell interference.

[0028] If the interference is above the aforementioned upper threshold demodulation scheme selection logic 403

preferably chooses to employ non-linear multi-user decoder 407. A typical example of a non-linear multi-user decoder is the so-called "maximum likelihood multi-user decoder." However, as will be appreciated by one of ordinary skill in the art, any number of multi-user decoders may be used in accordance with the present invention. Non-linear multi-user decoder 407 jointly decodes both data streams, the data intended for the terminal and the interfering leakage signal. Non-linear multi-user decoder 407 preferably discards the decoded interfering leakage signal data. However, by decoding both streams jointly, decoding of the data stream intended for the terminal may be significantly improved. The decoding of the intended signal is improved because, rather than treating the interfering signal as noise, which will result in the interfering signal imparting significant interference, the interfering signal is decoded and discarded, eliminating it as a source of interference, relative to the intended signal.

[0029] Whereas non-linear multi-user decoder 407 is more computationally intensive, it may drain more battery power of a terminal, generate more heat and/or the like, if the linear multi-user decoder or the single user decoder will suffice one of these may be employed. Therefore, demodulation scheme selection 403 may compare not only the strengths of the signal intended for the terminal and an interfering signal, but also evaluate the knowledge of the two signals it can derive. As a result, demodulation scheme selection 403 preferably makes a prediction as to whether linear multi-user decoder 406 can satisfactorily decode the intended signal. By way of example, if linear multi-user decoder 406 demodulation can provide a certain Signal-to Noise Ratio (SNR) strength threshold and/or meet other threshold factors, the simpler linear multi-user decoder 406 will be used. However, if linear multi-user decoder 406 cannot satisfactorily decode the intended signal, such as failing to provide a threshold SNR strength and/or other threshold factors, resulting in an unacceptable error rate or other performance, non-linear multi-user decoder 407 is preferably used for decoding. [0030] FIG. 5 is a diagram illustrating signal strength thresholding 500 in terminal demodulation scheme selection in accordance with embodiments of the present invention, such as at 403 in FIG. 4. Thresholding 500 looks to signal strengths of signals 1 through 4, preferably the signal strengths of the preambles of signals 1 through 4. These signal strengths may be used as a first level of evaluation of the interference from four interfering base stations and/or terminals. Preamble 1 is shown as having sufficient signal strength, above an upper signal strength threshold, to warrant, at least in a first approximation, nonlinear multi-user decoding. Meanwhile preamble 3 is shown as having only sufficient strength, above the lower signal strength threshold, but below the upper signal strength threshold, to warrant linear multi-user decoding. Whereas signal strength from preambles 2 and 4 are below the lower signal strength threshold, Preambles 2 and 4 may be treated as background interference and ignored or filtered out in a conventional manner during single user decoding. Additionally or alternatively, embodiments of the present invention may employ previously demodulated signal(s), in addition to, or instead of, preamble signals, to assist in selecting between signal and multi-user decoders.

[0030] However, embodiments of the present invention might treat all interfering signals alike, and once one signal breaches a signal strength threshold, all of the received signals are afforded the same type of demodulation/decod-

ing. Under such an embodiment, the signals in **FIG. 5** would all be subjected to nonlinear multi-user decoding since preamble 1 breaches the upper signal strength threshold.

[0031] Alternatively, all signals for which the preambles breach at least the lower signal strength threshold may be decoded using the scheme appropriate for the highest signal strength, while signals for which the preamble did not breach the lower signal strength threshold may be treated as background noise and ignored or filtered out in a conventional manner. In this latter embodiment, signals 1 and 3 of **FIG. 5** would be subjected to nonlinear multi-user decoding since the preamble of signal 1 breaches the upper signal strength threshold and the preamble of signal 3 breaches the lower signal strength threshold, even though it does not breach the upper signal strength threshold. Meanwhile, signals 2 and 4 would be treated as background noise and ignored or filtered out in a conventional manner, as the preambles of signals 2 and 4 fail to reach the lower signal strength threshold.

[0032] Attention is now directed to **FIGS. 6 and 7**, which tabulate subchannel assignment in accordance with embodiments of the present invention. In a multi-cell OFDMA system such as system 100 of **FIG. 1** the base stations have the responsibility of assigning the subchannels. A traditional OFDMA system assigns subchannels more or less randomly, as a traditional OFDMA system sees the subchannels as more or less fungible. However, knowing whether a terminal has multi-user decoders in accordance with the present invention, or not, a difference arises in assigning the subchannels. **FIG. 6** tabulates a comparison of possible data rates of a number of terminals for a single OFDMA base station. If the terminals are only capable of single user decoding then the terminal which can make the best use of the subchannel, that provides the highest usage of the spectrum associated with the subchannel, is assigned the subchannel, terminal c in **FIG. 6**. However, in accordance with embodiments of the present invention, if some of the user terminals also have multi-user decoders, then they can achieve higher data rates because they can eliminate interference. Therefore, in **FIG. 6**, since terminal b can achieve the highest data rate and since terminals a and c, possibly due to their locations, cannot achieve as high a data rate as terminal b, the subchannel is assigned to terminal b. In this manner a single OFDMA wireless communication base station employing the present invention employs intelligent channel assignment in consideration of whether the terminals have a multi-user decoder or a single user decoder and the data rates these terminals are capable of using.

[0033] **FIG. 7** tabulates subchannel assignment in a multi-cell system in accordance with embodiments of the present invention. In a multi-cell OFDMA system, all the cells may use a subchannel simultaneously. The example of **FIG. 7** shows a determination of how three such cells may assign a subchannel in accordance with the present invention. With a goal of maximizing throughput for the entire system, in light of other factors such as obligations to provide a minimum data rate to certain terminals. In accordance with the present invention both terminals with or without multi-user decoding performance are considered. Also, a consideration as to whether a particular subchannel should be used by certain cells may be appropriate. For example, a benefit, such as lowered interference for that subchannel in a neighboring cell, that benefits the overall performance of the system may

be considered in subchannel assignment in accordance with the present invention. Given the achievable data rates of the terminals of **FIG. 7**, terminal 1b of cell 1, terminal 2c of cell 2, and terminal Na of cell N provides the maximum total throughput for the system of **FIG. 7**.

[0034] However, autonomous decision by each cell to assign a subchannel to its terminal that provides the highest throughput would not necessarily result in providing the highest throughput for the entire multi-cell system. Forcing the maximum throughput in one cell may affect other cells and lower the overall throughput of the system. For example, usage of a subchannel in a particular cell may destroy the potential usage of that subchannel in a plurality of other cells. Therefore, in accordance with the present invention the cells of a system may coordinate, such as via communication links 141-143 of **FIG. 1**, in order to enhance overall system throughput. For example, in **FIG. 7**, if assigning the subject subchannel to terminal 1b would detrimentally effect the use of that subchannel in a plurality of other cells, then the subject subchannel may be assigned to another terminal or not assigned at all in cell 1, even though assigning the subject subchannel to terminal 1b would provide a very high data rate for terminal 1b. Conversely, if nonassignment of the subject subchannel to terminal 1b would not enable more throughput in other cells, greater than the throughput afforded by assigning the subject subchannel to terminal 1b, the subject subchannel should be assigned to terminal 1b, unless it would have an impact on other factors, such as making any coverage at all unavailable to terminals in other cells. In the end, the goal of the present systems and methods is to maximize the total throughput across cells while satisfying fairness and other constraints. In accordance with embodiments of the present invention, centralized subchannel assignment among base stations can be used to maximize the total network throughput. However, the present invention may not employ centralized control, but rather distributed decision making process. For example, each cell's base station may share information with other cells, such as via communication links 141-143 of **FIG. 1**, particularly neighboring cells to provide distributed optimization. In this manner, each cell may assure it will not be adversely effecting other cells, particularly neighboring cells, by its subchannel assignments.

[0035] For example, base stations may cooperate or coordinate to overlap subchannel assignments in frequency and time so that terminals may more effectively use linear or non linear multi-user decoding to handle interfering leakage signals. With attention directed back to **FIGS. 3 and 4**, if the assignment of subchannels is fully overlapped in both frequency and time, the assignment of subchannel K is fully overlapped, relative to cells 1 and 2 in **FIG. 3**, then during demodulation, in accordance with the present invention (**FIG. 4**), linear or non linear multi-user decoding may be effectively used. However, if the subchannels are not fully overlapped, such as is shown for partially overlapped subchannel L in **FIG. 3**, the interference between the cells may be randomized. As a result, linear or non linear multi-user decoding might not be as effective, or even possible, and single user decoding and filtering might need to be used, typically resulting in a lower throughput for the subject terminal(s) and thus possibly for the overall system.

[0036] Although the present invention and its advantages have been described in detail, it should be understood that

various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

What is claimed is:

1. A method comprising:
 - receiving a signal intended for a terminal of an Orthogonal Frequency Division Multiplexing Access (OFDMA) wireless communication system on a sub-channel of said OFDMA system;
 - receiving, by said terminal, an interfering signal on said subchannel;
 - decoding at least a portion of said interfering signal; and
 - using the decoded portion of said interfering signal to decode said intended signal.
2. The method of claim 1 wherein said decoding at least a portion of said interfering signal is selective and said method further comprises:
 - selecting between a single user decoder and a multi-user decoder to decode the intended signal, wherein said single user decoder decodes only said intended signal if selected and said multi-user decoder decodes at least a portion of said interfering signal if selected.
3. The method of claim 2 wherein said selecting is based, at least in part, on a strength of said interfering signal relative to said intended signal
4. The method of claim 2 wherein said selecting further comprises selecting between a linear multi-user decoder and a non-linear multi-user decoder.
5. The method of claims 4 wherein said selecting between a linear multi-user decoder and a non-linear multi-user decoder is based at least in part on previously demodulated signals.
6. The method of claim 4 further comprising:
 - processing a preamble for said intended signal; and
 - processing a preamble for said interfering signal.
7. The method of claims 6 wherein said selecting between a linear multi-user decoder and a non-linear multi-user decoder is based at least in part on information from the preambles.
8. The method of claim 7 wherein said information from the preambles is used to determine if said linear multi-user decoding can satisfactorily decode said intended signal.
9. The method of claims 8 wherein said selecting between a linear multi-user decoder and a non-linear multi-user decoder is based at least in part on previously demodulated signals.

10. The method of claim 4 wherein said linear multi-user decoder, if selected, filters out the decoded interfering signal.

11. The method of claim 10 wherein said filtering out comprises forming a filter set based on a data structure of said interfering signal.

12. The method of claim 10 wherein said filtering out comprises forming an antenna pattern for said terminal with a null directed toward a source transmitting said interfering signal.

13. The method of claim 12 wherein said a source transmitting said interfering signal is identified from said interfering signal.

14. The method of claim 4 wherein said non-linear multi-user decoder, if selected decodes all of said interfering signal and then discards the decoded interfering signal

15. The method of claim 1 further comprising:

filtering out the decoded interfering signal.

16. The method of claim 15 wherein said filtering out comprises discarding said decoded interfering signal.

17. The method of claim 15 wherein said filtering out comprises forming a filter set based on a data structure of said interfering signal.

18. The method of claim 15 wherein said filtering out comprises forming an antenna pattern for said terminal with a null directed toward a source transmitting said interfering signal.

19. The method of claim 18 wherein said a source transmitting said interfering signal is identified from a derived preamble of said interfering signal.

20. An OFDMA terminal comprising:

means for receiving a signal intended for said terminal and at least one interfering signal on a subchannel of an OFDMA wireless communication system; and

at least one multi-user decoder adapted to decode said intended signal and at least a portion of said interfering signal.

21. The terminal of claim 20 further comprising:

a single user decoder that is adapted to decodes only said intended signal; and

demodulation scheme selection logic selecting between said single user decoder and one of said at least one multi-user decoders for demodulating said intended signal.

22. The terminal of claim 21 wherein the selection between said single user decoder and one of said at least one multi-user decoder is based at least in part on a strength of said interfering signal, relative to a strength of said intended signal.

23. The terminal of claim 22 wherein said at least one multi-user decoder comprises a linear multi-user decoder and a non-linear multi-user decoder.

24. The terminal of claim 23 wherein said demodulation scheme selection logic selects between said single user decoder, said linear multi-user decoder and said non-linear multi-user decoder for demodulating said intended signal.

25. The terminal of claims 24 wherein said selecting between a linear multi-user decoder and a non-linear multi-user decoder is based at least in part on previously demodulated signals.

26. The terminal of claim 24 further comprising:
a preamble processor deriving a preamble of the intended signal and deriving a preamble of the interfering signal, if possible.
27. The terminal of claim 26 wherein the selection between said single user decoder, said linear multi-user decoder and said non-linear multi-user decoder for demodulating said intended signal is based at least in part on information from the preambles.
28. The terminal of claim 27 wherein said information from the preambles is used to determine if said linear multi-user decoding can satisfactorily decode said intended signal.
29. The terminal of claims 27 wherein said selecting between a linear multi-user decoder and a non-linear multi-user decoder is based at least in part on previously demodulated signals.
30. The terminal of claim 23 wherein said linear multi-user decoder comprises a filter used to filter out the decoded interfering signal when said linear multi-user decoder is selected by said demodulation scheme selection logic to decode said intended signal.
31. The terminal of claim 30 wherein said filter comprises forming a filter set based on a data structure of said interfering signal.
32. The terminal of claim 30 wherein said filter comprises means for forming an antenna pattern for said terminal with a null directed toward a source transmitting said interfering signal.
33. The terminal of claim 32 wherein said a source transmitting said interfering signal is identified from the derived preamble for said interfering signal.
34. The terminal of claim 23 wherein said non-linear multi-user decoder is adapted to decode all of said interfering signal and then discard the decoded interfering signal when said linear multi-user decoder is selected by said demodulation scheme selection logic to decode said intended signal.
35. A method comprising:
overlapping use of a subchannel used by a cell of an OFDMA wireless communications system with use of said subchannel by at least one other cell of said OFDMA system so as to cause interfering signals using the same subchannel in one of said cells to overlap with a signal intended to be received by at least one terminal using said subchannel in the one cell.
36. The method of claim 35 wherein at least one terminal of said OFDMA system selectively employs a multi-user decoder to decode a signal intended for said at least one terminal received on an assigned subchannel and at least a portion of an interfering signal received on said assigned subchannel.
37. The method of claim 36 wherein said multi-user decoder decodes only a portion of the interfering signal and filters out the decoded interfering signal.
38. The method of claim 37 wherein the filtering out comprises forming a filter set based on a data structure of said interfering-signal.
39. The method of claim 37 wherein the filtering out comprises forming an antenna pattern for said terminal with a null directed toward a source transmitting said interfering signal.

40. The method of claim 37 wherein the multi-user decoder decodes all of the interfering signal and discards the decoded interfering signal.
41. The method of claim 35 further comprising:
assigning said subchannel to a terminal if assigning said subchannel to said terminal will maximize overall data throughput to terminals of said system.
42. The method of claim 41 wherein a base station of each of said cells of said OFDMA system assign use of said subchannel to a terminal which has the highest data throughput for said subchannel.
43. The method of claim 41 wherein said assigning further comprises coordinating between base stations of said OFDMA system assignment of subchannels by each of said base stations.
44. The method of claim 43 wherein said coordinating comprises at least one of said base stations not assigning a particular subchannel for use by a cell terminal.
45. The method of claim 44 wherein said subchannel is not assigned because use of said subchannel by said at least base station would interfere with one or more terminals using said subchannel in a neighboring cell.
46. The method of claim 44 wherein said subchannel is not assigned because use of said subchannel by said at least base station would prevent use of said subchannel in one or more neighboring cells.
47. The method of claim 43 wherein said coordinating between base stations comprises sharing information between said base stations.
48. The method of claim 47 wherein said information comprises information about data throughput for terminals in said base stations' cells using subchannels of said OFDMA system.
49. The method of claim 43 wherein said coordinating between base stations of said OFDMA system is centralized.
50. The method of claim 43 wherein said coordinating between base stations of said OFDMA system is decentralized.
51. An OFDMA communication system comprising:
a plurality of base stations overlapping use of a subchannel used by a cell of an OFDMA wireless communications system with use of said subchannel by at least one other cell of said OFDMA system, such that interfering signals using a same subchannel in one of said cells overlaps with a signal intended to be received by at least one terminal using said subchannel in the one cell.
52. The system of claim 51 further comprising:
a plurality of terminals, at least one of said terminals comprising at least one multi-user decoder adapted to decode a signal intended for said at least one terminal received on a subchannel of said system and adapted to decode at least a portion of an interfering signal received on said subchannel.
53. The system of claim 52 wherein said plurality of terminals includes at least one terminal comprising a single user decoder.
54. The system of claim 52 wherein said at least one terminal also comprises a single user decoder.
55. The system of claim 54 wherein said single user decoder decodes only said intended signal.
56. The system of claim 52 wherein said multi-user decoder comprises a linear multi-user decoder, which

decodes only a portion of the interfering signal and filters out the decoded interfering signal.

57. The system of claim 56 wherein the filtering out comprises forming a filter set based on a data structure of said interfering signal.

58. The system of claim 56 wherein the filtering out comprises forming an antenna pattern for said terminal with a null directed toward a source transmitting said interfering signal.

59. The system of claim 52 wherein the multi-user decoder comprises a non-linear multi-user decoder, which decodes all of the interfering signal and discards the decoded interfering signal.

60. The system of claim 51 wherein each of said base stations is in communication with others of said base stations for exchanging information about data throughput for particular terminals in cells of said system using particular subchannels in said cells, each of said base stations assigning said subchannels to terminals in the cell of the base station so as to maximize data throughput in said multicell system.

61. The system of claim 60 wherein said assigning is carried out in a centralized manner.

62. The system of claim 60 wherein said assigning is carried out in a decentralized manner.

63. The system of claim 60 wherein each of said base stations assign use of said subchannels to terminals which has the highest data throughput for said subchannel.

64. The system of claim 60 wherein at least one of said base stations does not assign a particular subchannel for use.

65. The system of claim 64 wherein said subchannel is not assigned because use of said subchannel by said at least one base station would interfere with one or more terminals using said subchannel in a neighboring cell.

66. The system of claim 64 wherein said subchannel is not assigned because use of said subchannel by said at least one base station would prevent use of said subchannel in one or more neighboring cells.

* * * * *