



US 20080266859A1


(19) **United States**(12) **Patent Application Publication**
Palmisano(10) **Pub. No.: US 2008/0266859 A1**(43) **Pub. Date: Oct. 30, 2008**(54) **EASY-GLIDE OFFSHORE READY LIGHT
TOWER SYSTEM****Related U.S. Application Data**


(60) Provisional application No. 60/914,289, filed on Apr. 26, 2007.

(76) Inventor: **Lester J. Palmisano**, Belle Chasse,
LA (US)**Publication Classification**(51) **Int. Cl.**
F21V 21/22 (2006.01)(52) **U.S. Cl.** **362/250**(57) **ABSTRACT**

An easy-glide portable light tower system having a transport enclosure for fully recessing and confining the system therein. The system includes a telescopic mast that is constructed to be stowed in a vertically upright position. The telescoping sections of the mast include frictionless pads to create frictionless surfaces between two adjacent and concentric telescoping sections or the mast base. The transport enclosure also includes stabilizing channels to stabilize arms supporting the lights.

Correspondence Address:

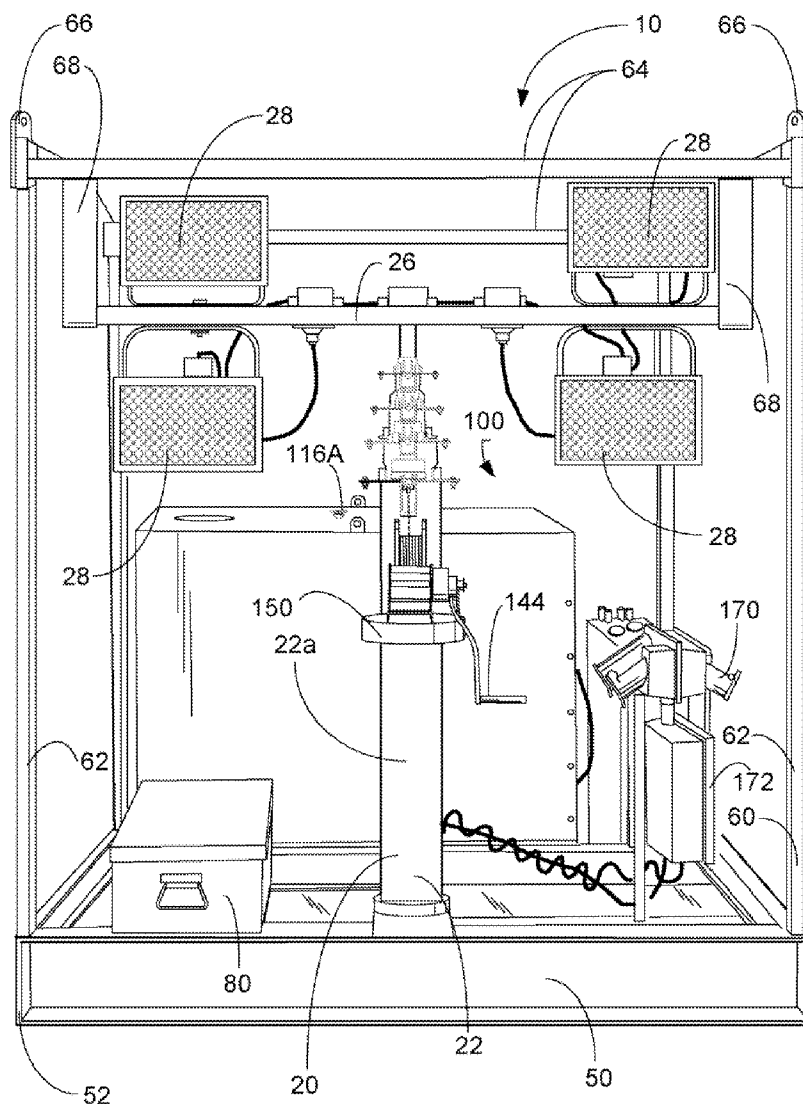**CARVER, DARDEN, DORETZKY, TESSIER,
FINN,
BLOSSMAN & AREAUX, LLC
1100 POYDRAS STREET, SUITE 3100
NEW ORLEANS, LA 70163 (US)**(21) Appl. No.: **12/110,984**(22) Filed: **Apr. 28, 2008**

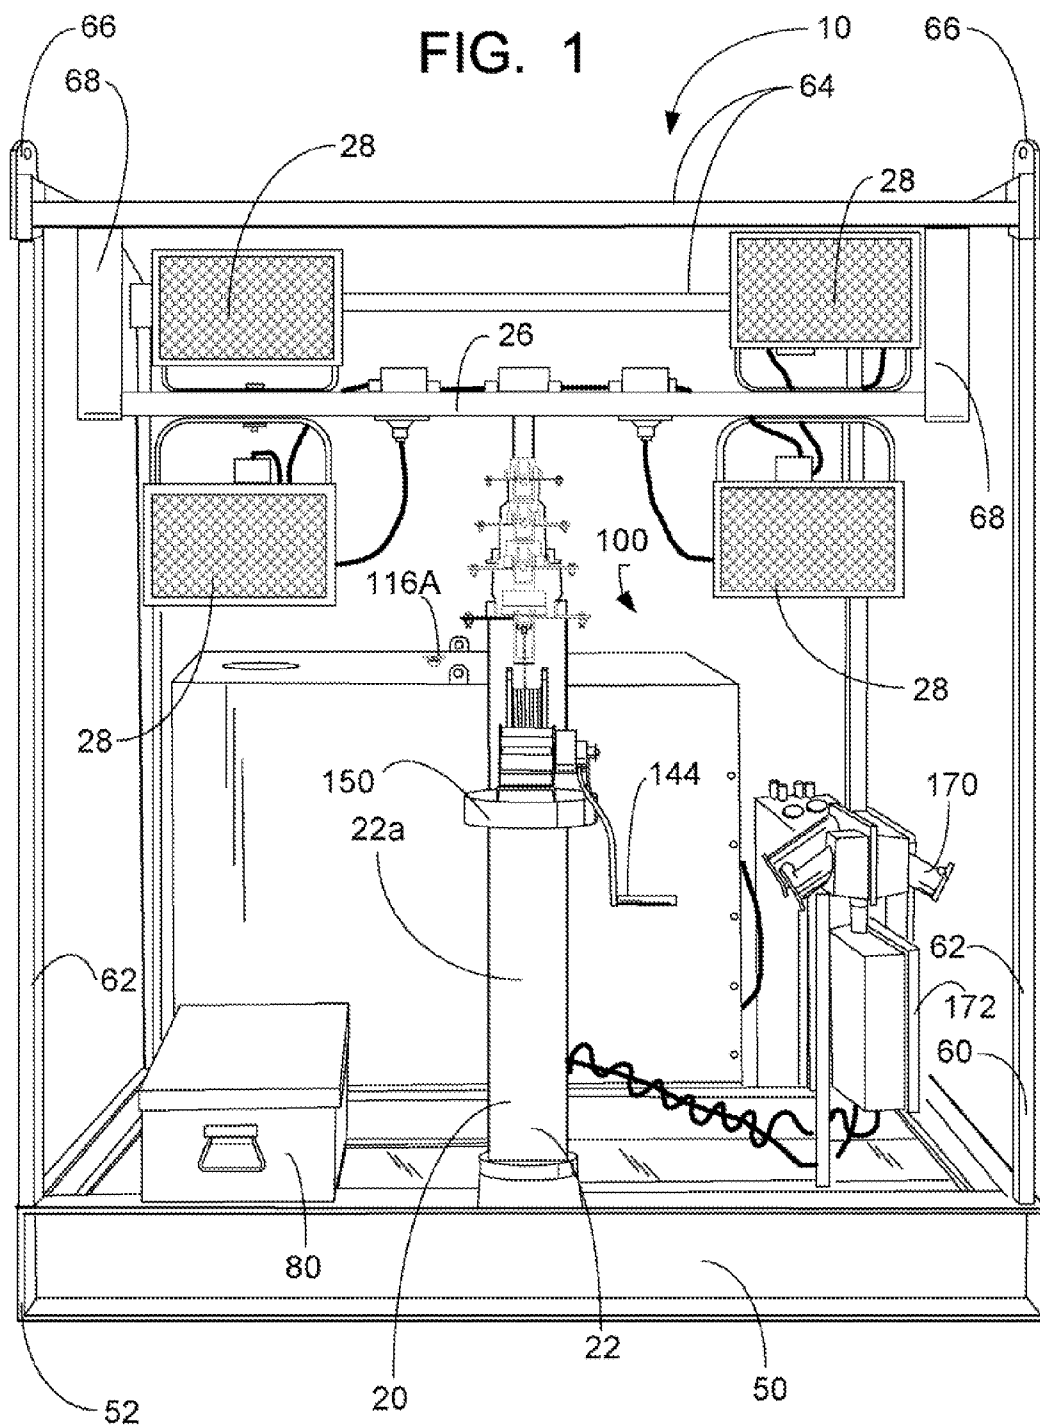

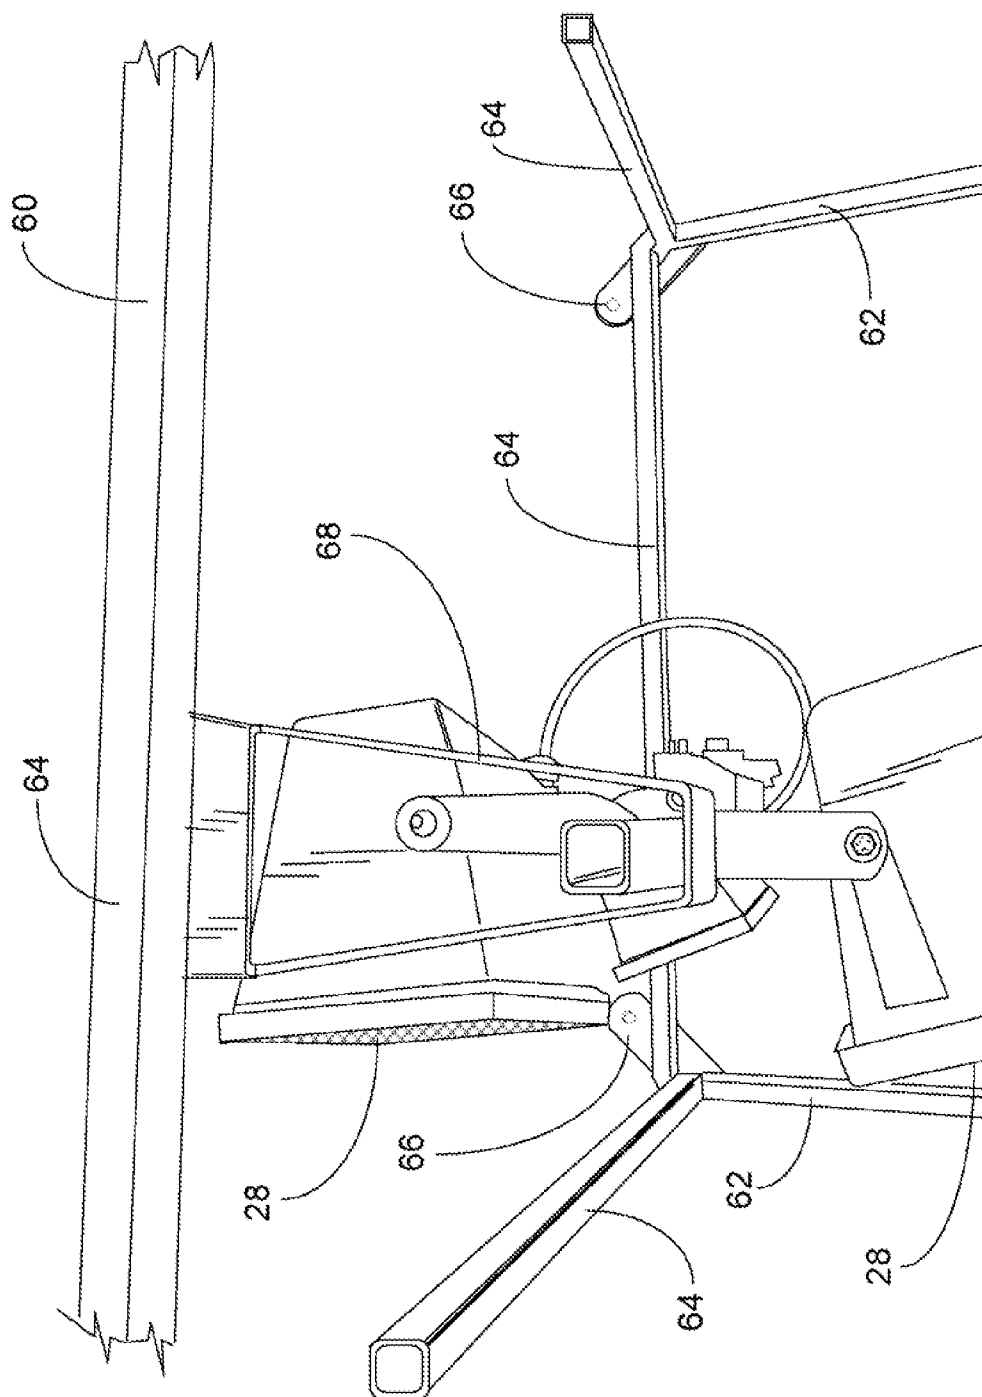


FIG. 3

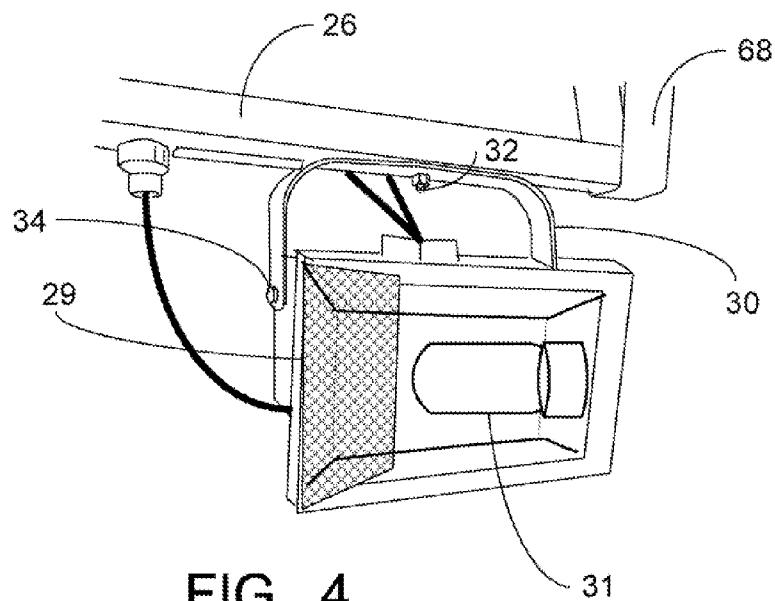


FIG. 4

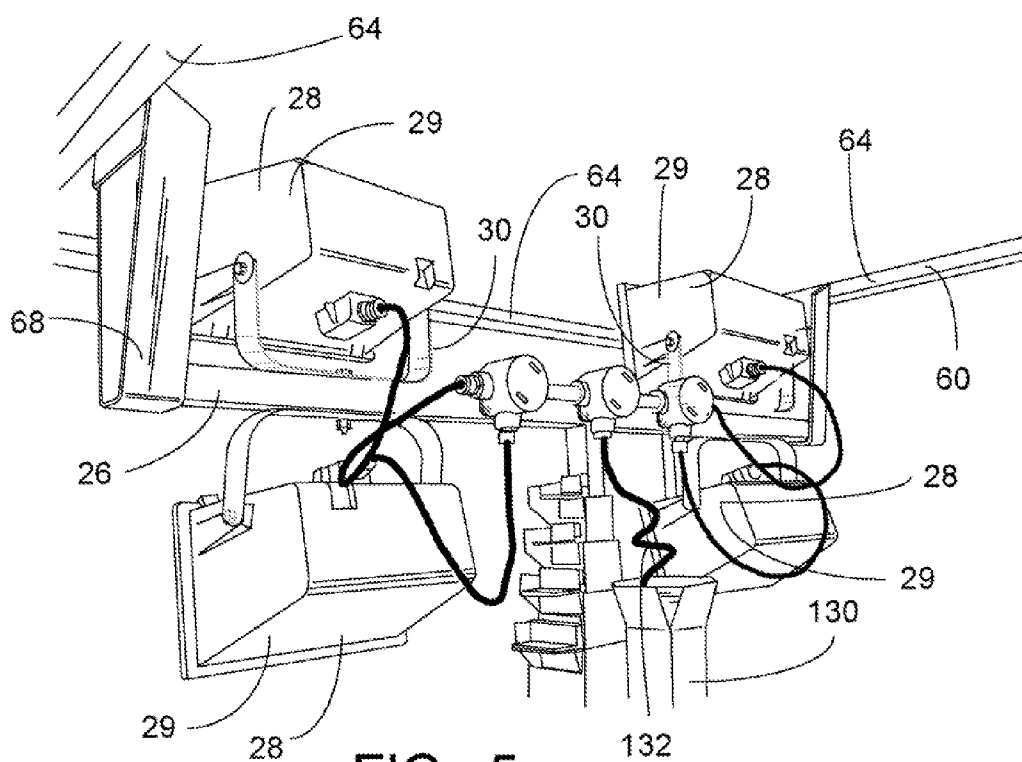
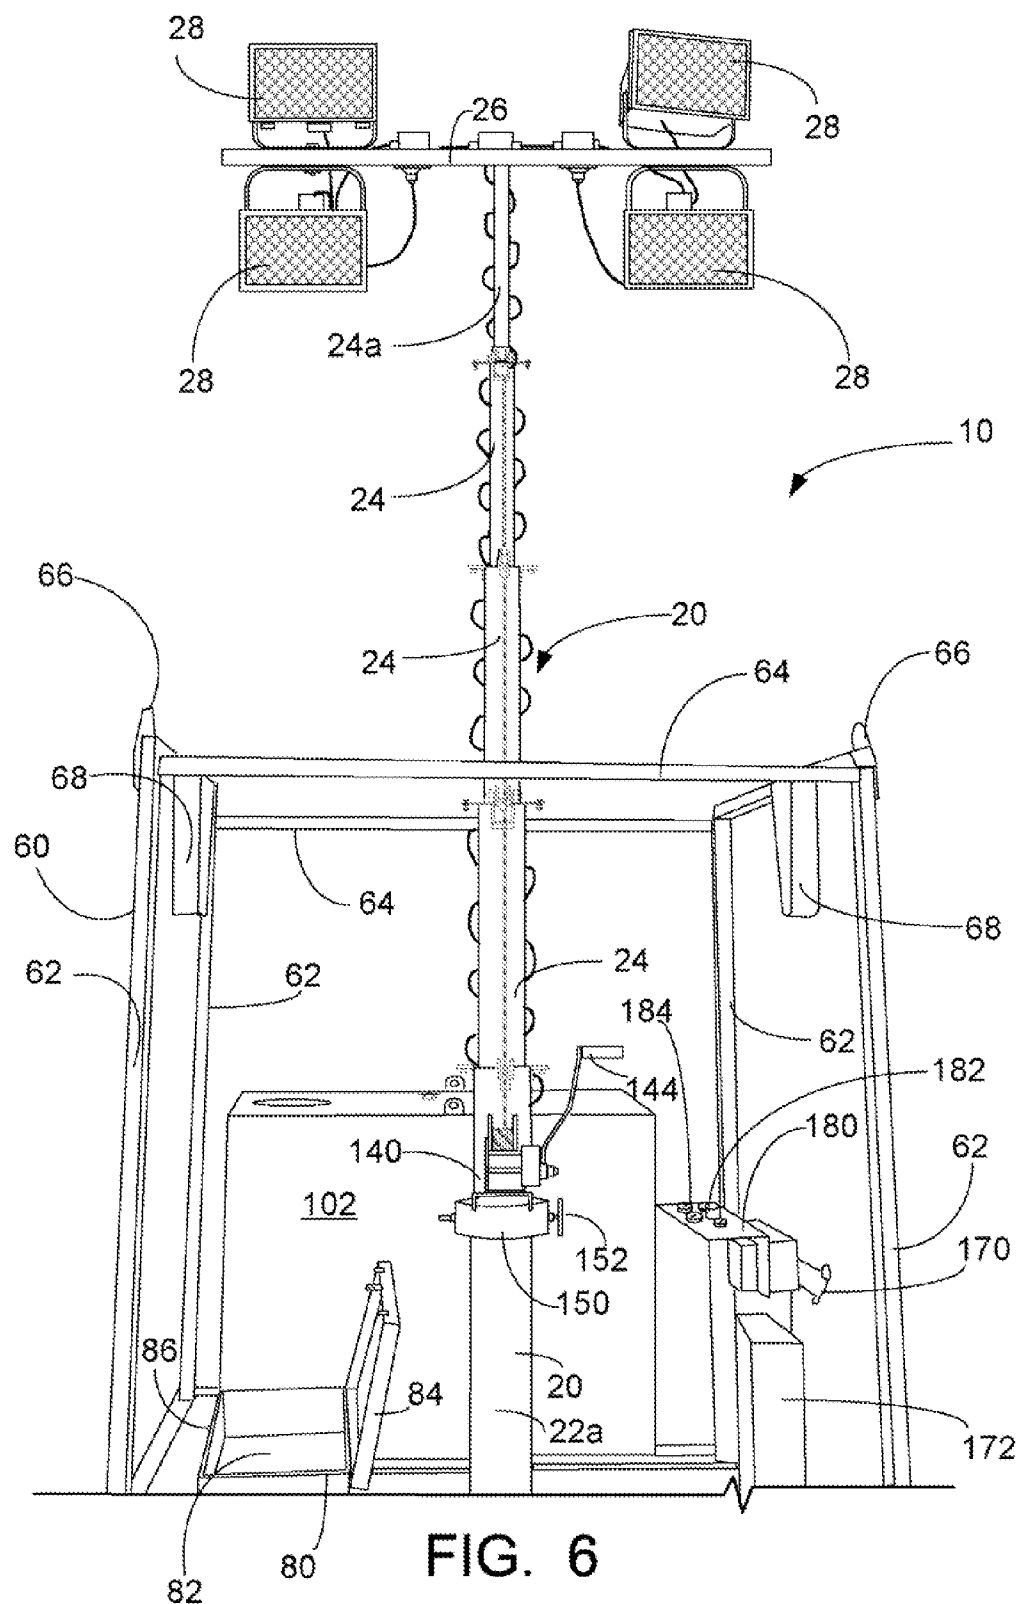
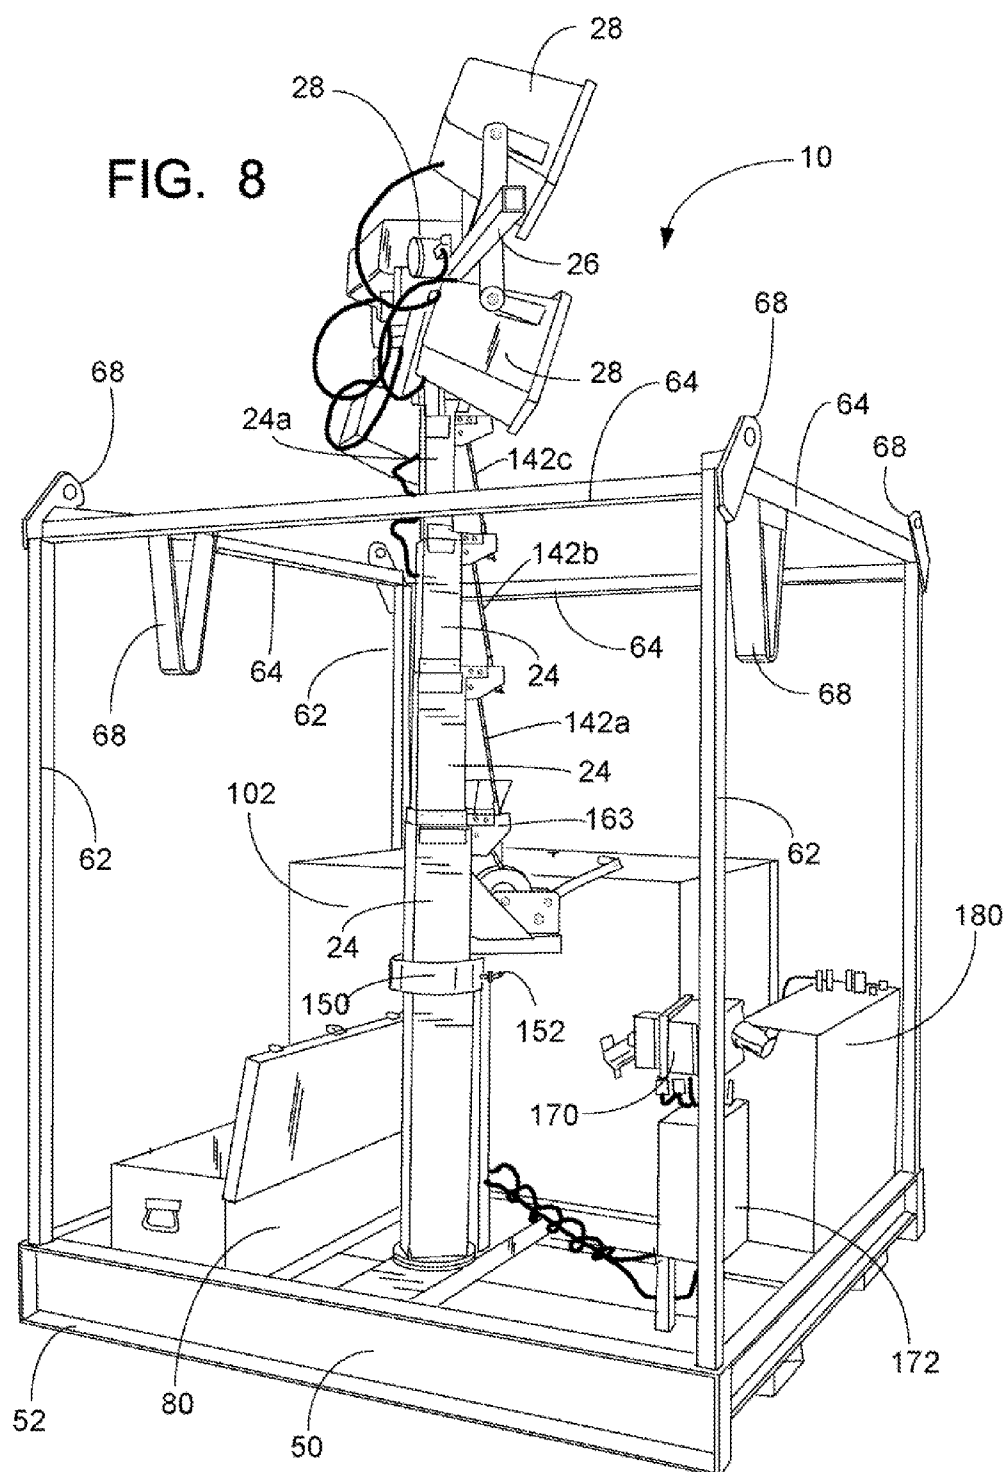


FIG. 5





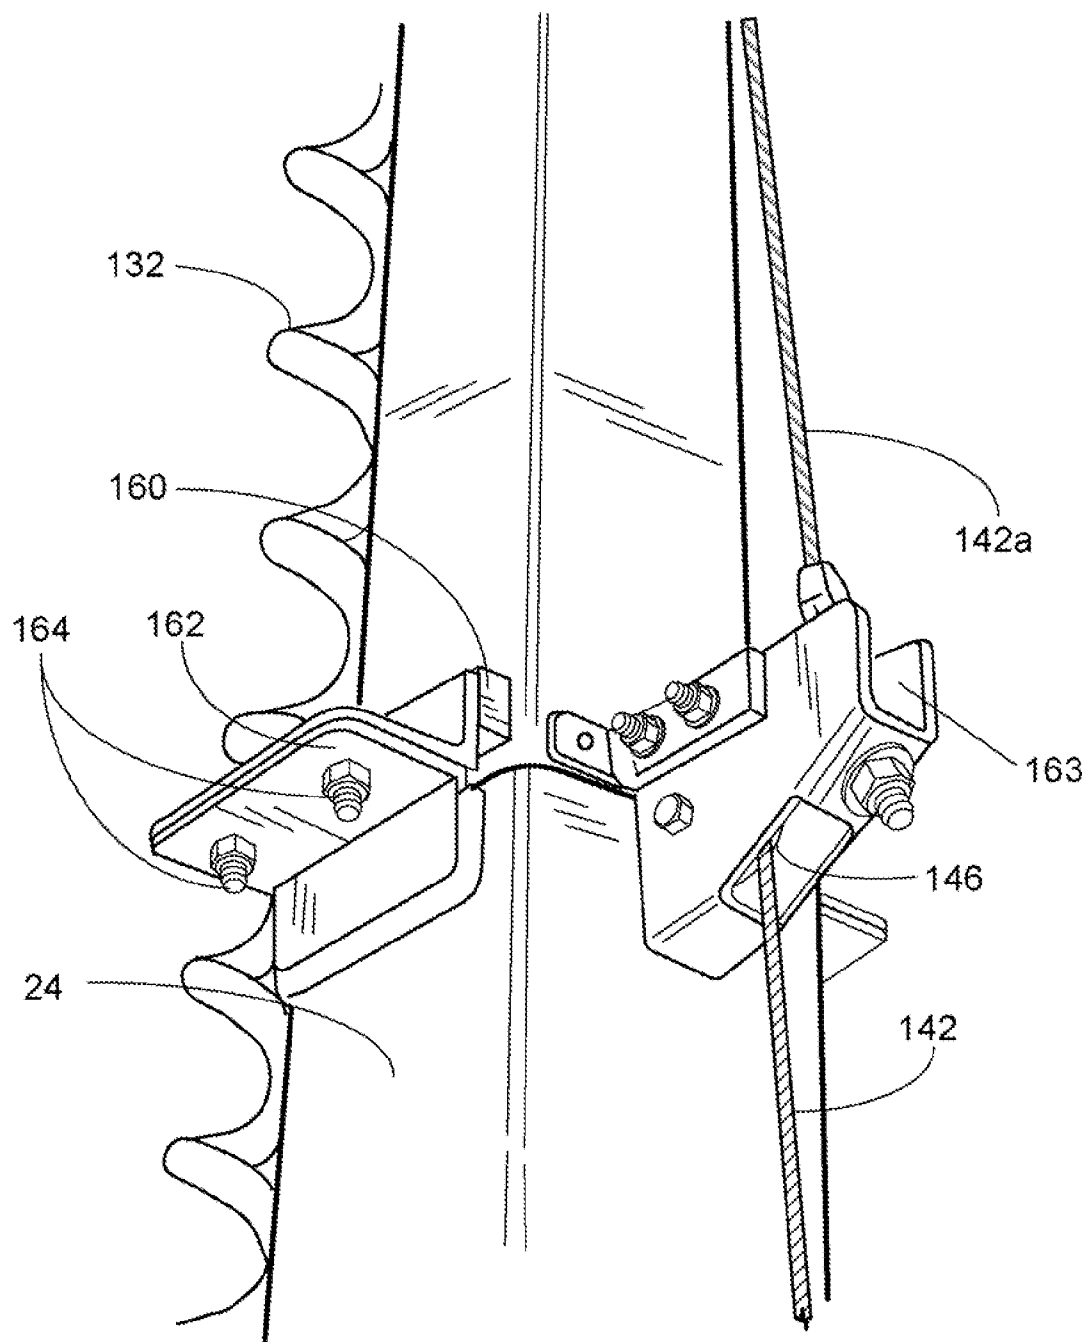


FIG. 9

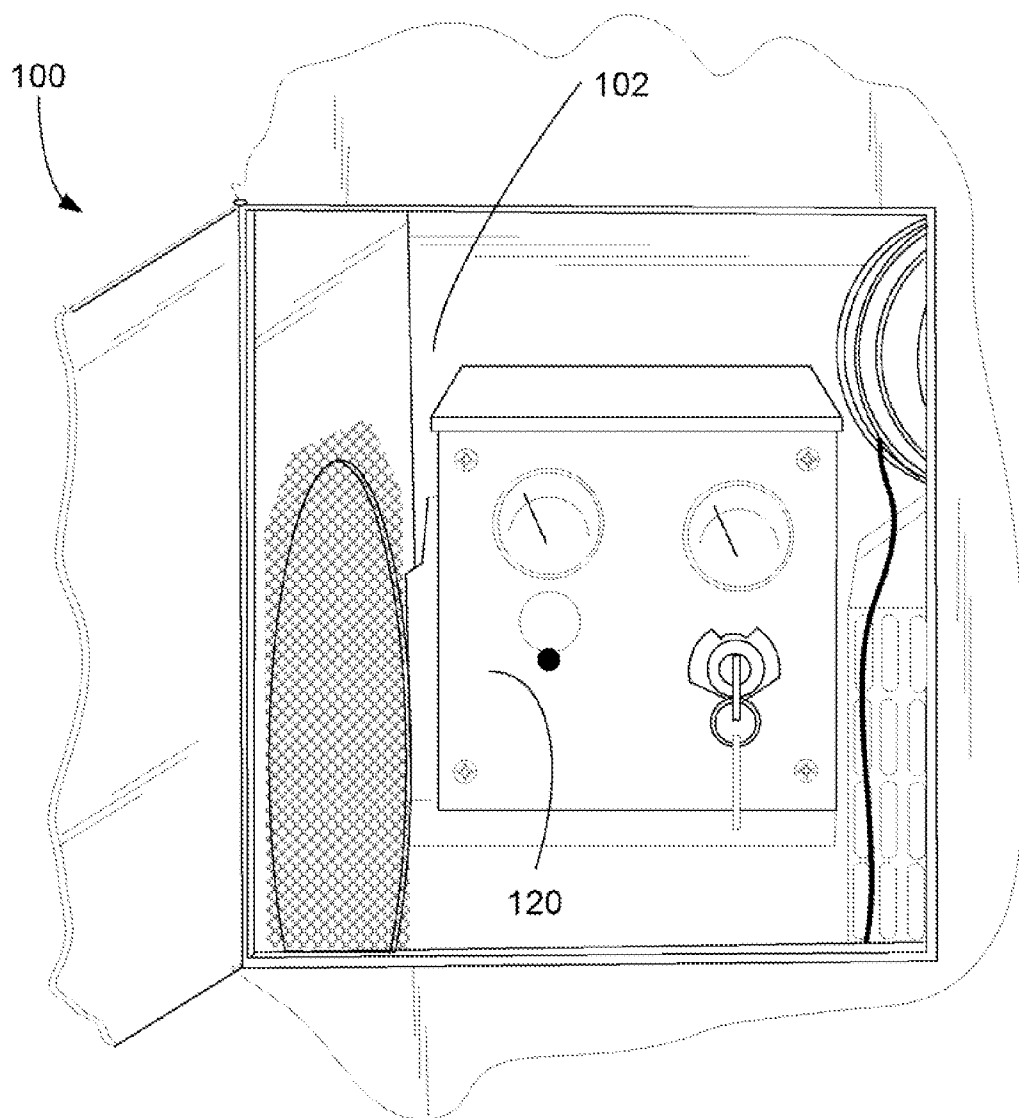


FIG. 10

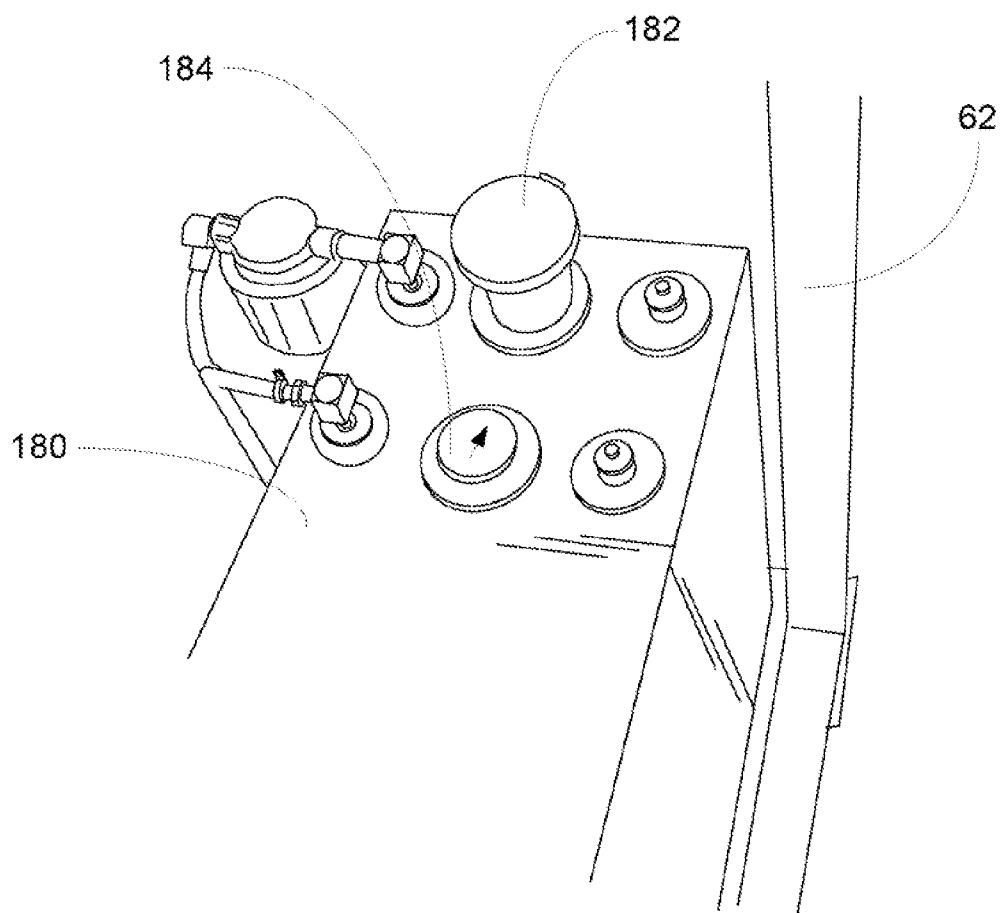


FIG. 11

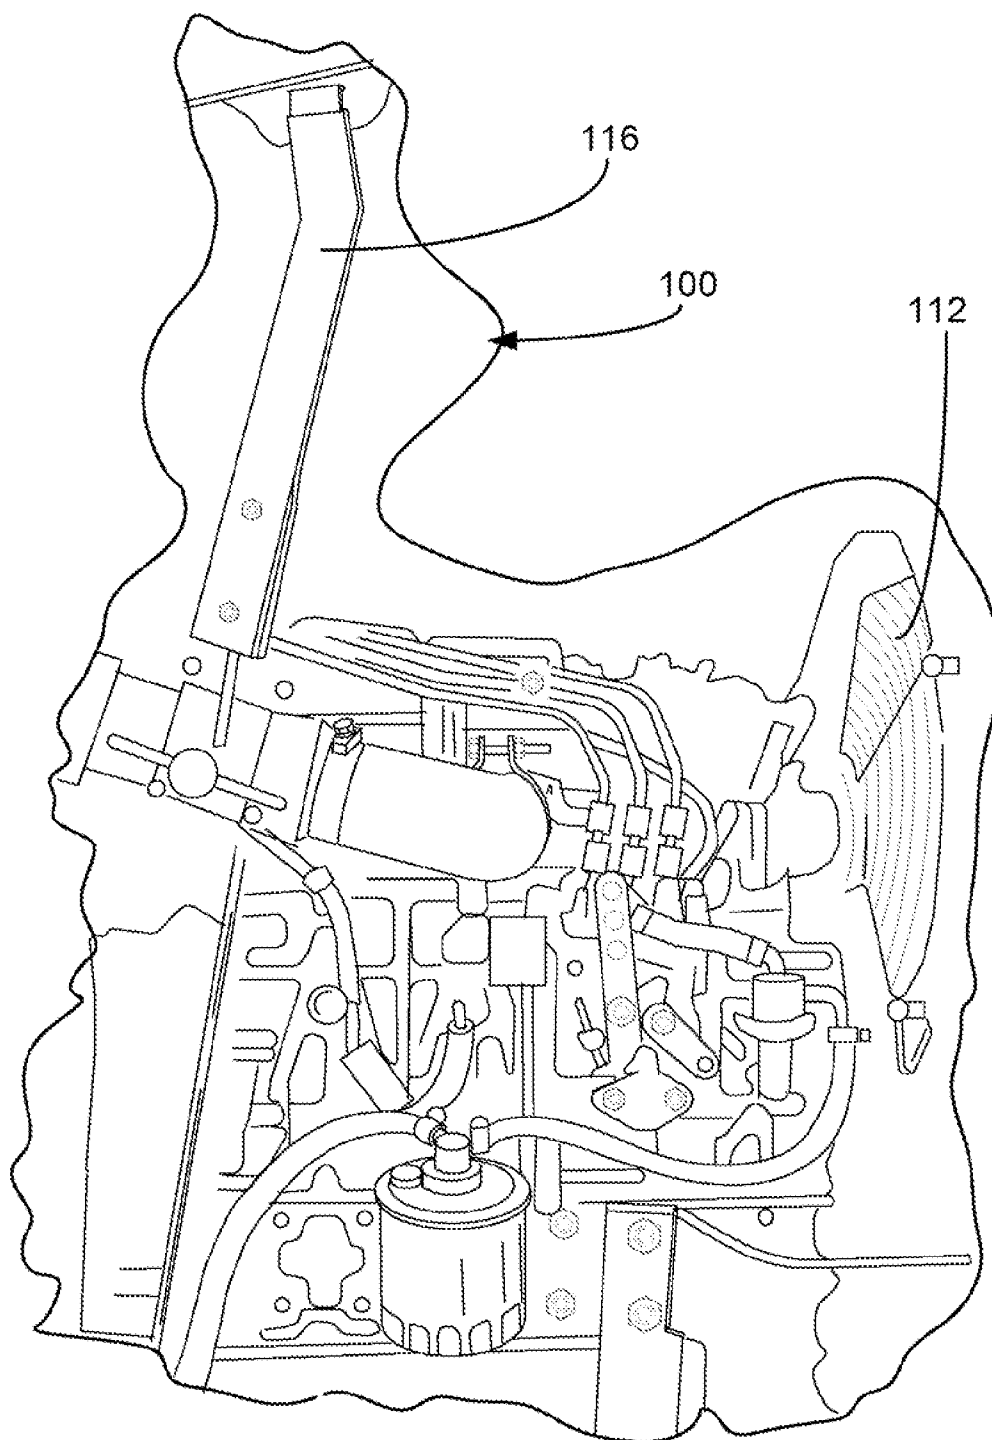


FIG. 12

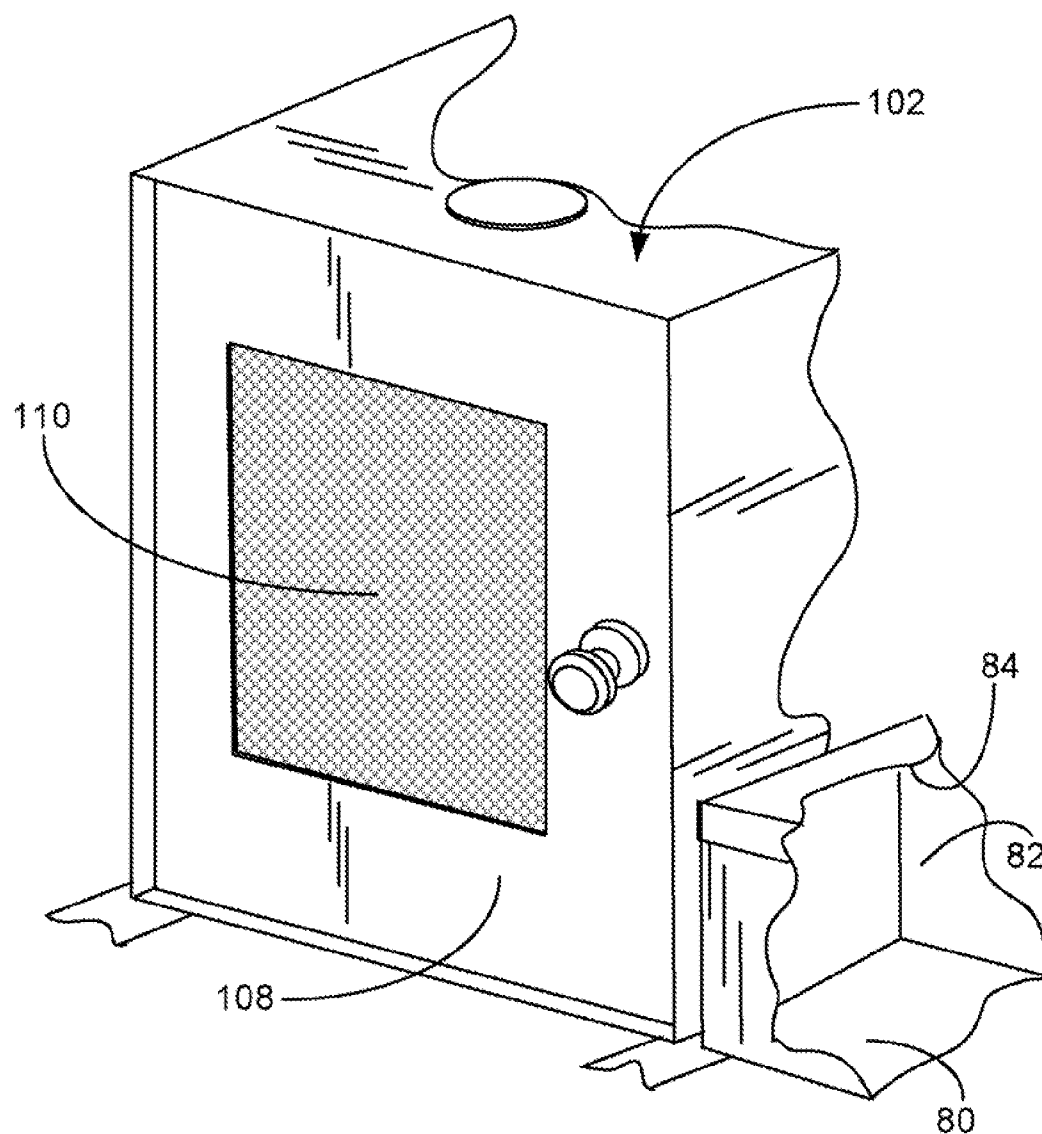
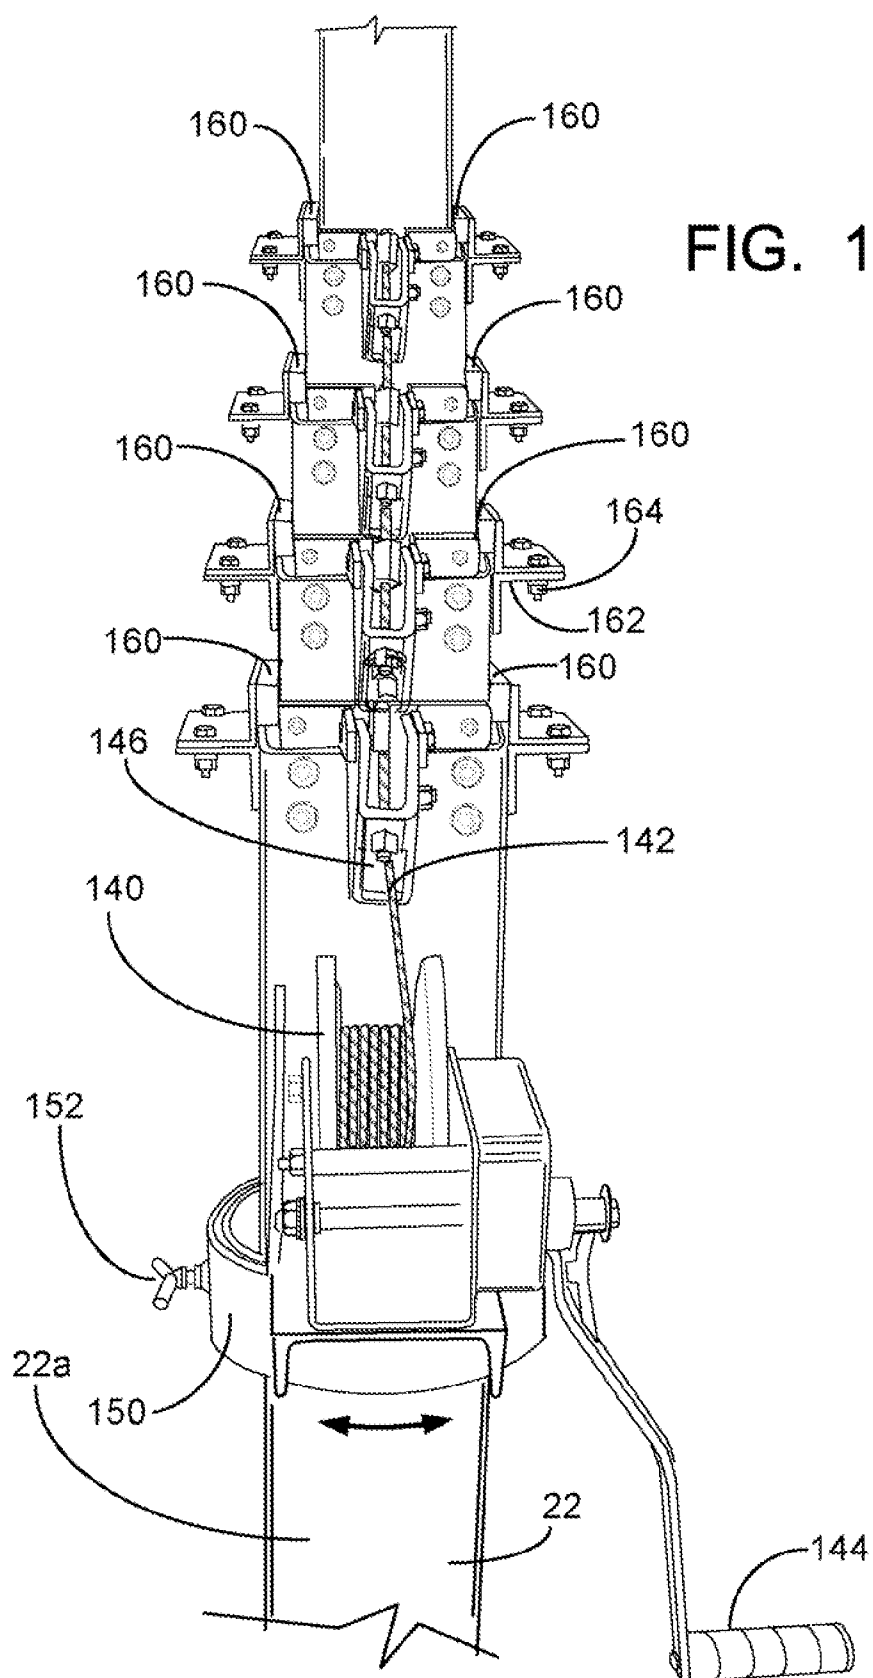
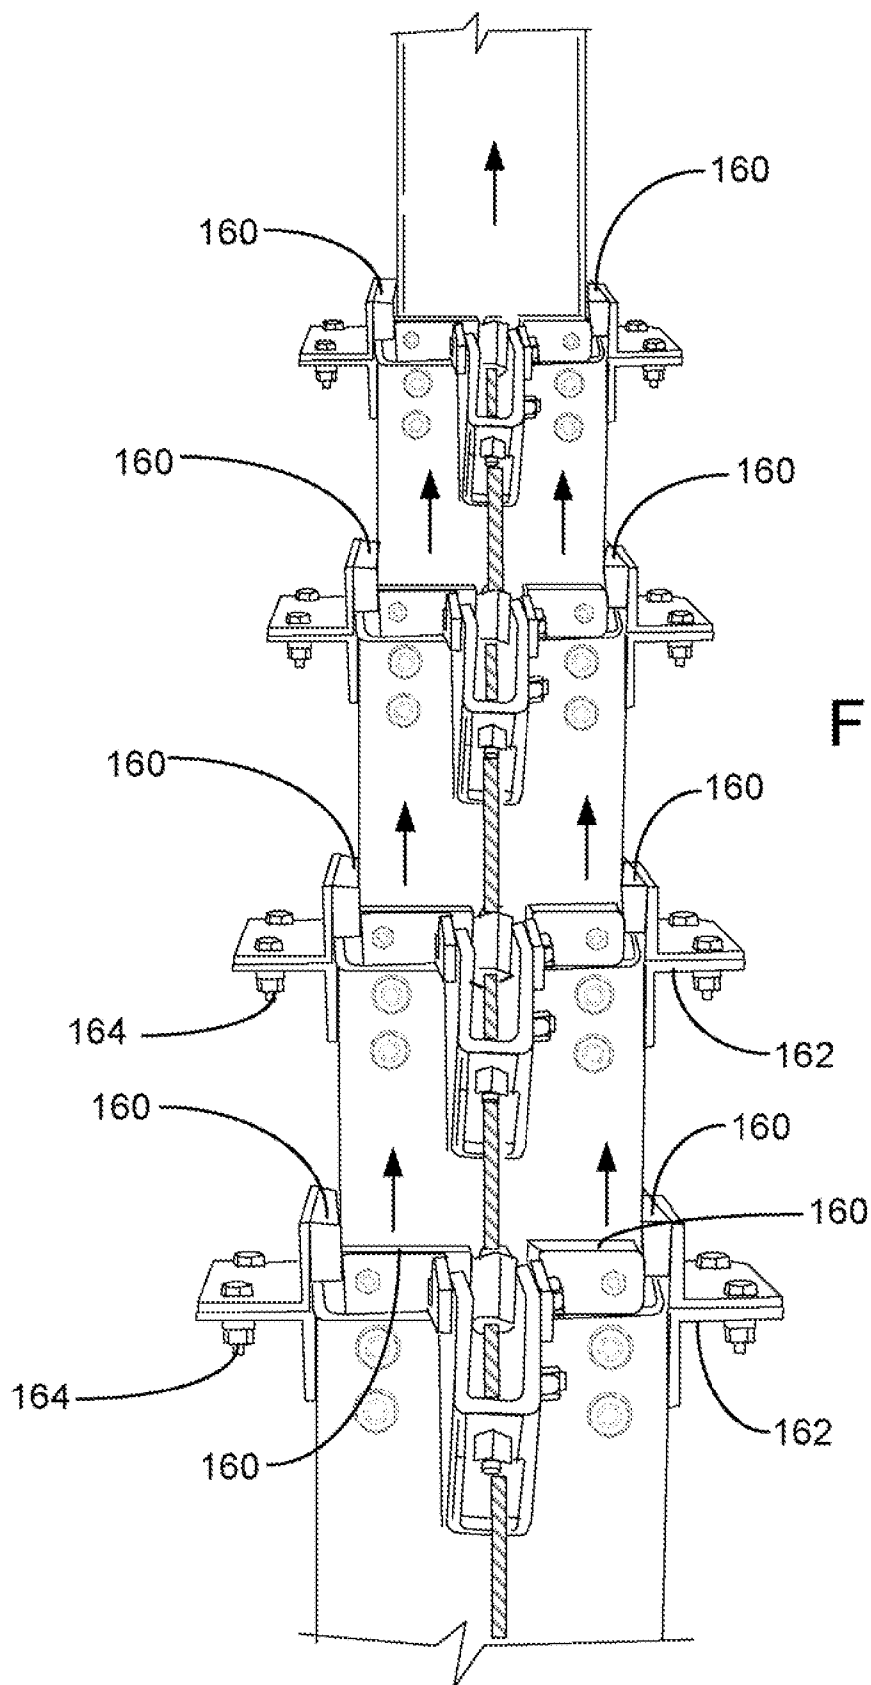


FIG. 13





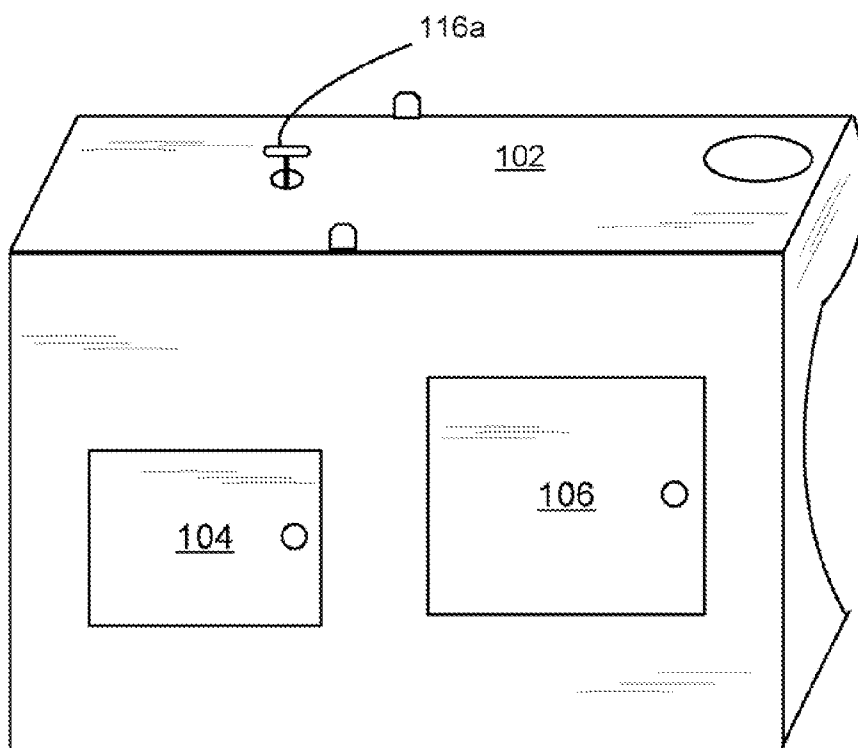


FIG. 16

EASY-GLIDE OFFSHORE READY LIGHT TOWER SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority from U.S. Provisional Application No. 60/914,289, filed Apr. 26, 2007, which is incorporated herein by reference as if set forth in full below.

BACKGROUND OF THE INVENTION

[0002] 1. Field

[0003] The present invention relates to offshore light towers and, more particularly, to an easy-guide portable light tower system having a telescopic light assembly adapted to be fully recessed into a transport enclosure when stowed.

[0004] 2. Background

[0005] Portable light towers are currently manufactured for on-shore use. These portable light towers include a generator with a pair of wheels. These land based portable light towers are not built for the off-shore environment and require extensive retrofitting.

[0006] Furthermore, when transported the portable light towers are not fully recessed in or confined in a transport enclosure. Instead, parts of the lights and other components are often unprotected and are damaged upon arrival to the off-shore site. This may lead to long delays in an environment where lost time is very costly.

[0007] The portable light tower systems are also stowed in a horizontal position. For operation, the mast of the system is rotated from a horizontal position to a vertical position. Thereafter, the mast can be telescoped. This increases the mechanical parts that can fail on the job site.

[0008] Thus, there is a need for a portable light system that can be fully protected during transport and eliminates the rotation of the mast to and from a horizontal position to a vertical position.

SUMMARY OF THE INVENTION

[0009] An aspect of the invention includes a system comprising: a transport enclosure constructed and arranged for an off-shore environment and having a horizontal perimeter boundary and a vertical perimeter boundary. The system also includes a telescopic light assembly mounted to the transport enclosure and operable to telescope vertically to extend beyond the vertical perimeter boundary and which, when stowed, is fully recessed and confined in the transport enclosure within the vertical and horizontal perimeter boundaries.

[0010] A further aspect of the present invention is to provide the transport enclosure with stabilizing channels supported from two parallel horizontal support members in proximity to receive free ends of the left and right arms when the mast is essentially at zero degrees.

[0011] A further aspect of the present invention is to provide a telescopic mast which comprises a plurality of concentric telescoping sections, wherein a top end of each telescoping section has a plurality of pads to create a frictionless surface between two adjacent telescoping sections.

[0012] A still further aspect of the present invention is to provide Teflon pads as frictionless surfaces so that as the telescopic mast is telescoped upward or downward in an easy-glide manner without the need for oils or other lubricants.

[0013] A still further aspect of the present invention is to provide a telescopic light assembly that is directly mounted to the transport enclosure to a vertically upright position and is stowed in the vertically upright position.

[0014] A still further aspect of the present invention is to provide an electric cable chamber positioned immediately adjacent the telescopic mast of the telescopic light assembly. The electric cable chamber stores a coiled electric cable which delivers power to lights of the telescopic light assembly. The electric cable chamber is arranged to automatically dispense therefrom as the telescopic mast is raised and receive therein the coiled electric cable as the telescopic mast is lowered.

[0015] Additional aspects will become more readily apparent from the detailed description, particularly when taken together with the appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] For a further understanding of the nature and objects of the present invention, reference should be had to the following description taken in conjunction with the accompanying drawings in which like parts are given like reference numerals.

[0017] FIG. 1 shows a front view of an easy-guide portable light tower system of the present invention with the telescopic light assembly in a stowed position.

[0018] FIG. 2 shows a side view of the easy-guide portable light tower system of FIG. 1.

[0019] FIG. 3 shows a view of a stabilizing channel for the telescopic light assembly in the stowed position.

[0020] FIG. 4 shows a front view of a light of the telescopic light assembly.

[0021] FIG. 5 shows a rear view of the light array of the telescopic light assembly.

[0022] FIG. 6 shows a front view of the easy-guide portable light tower system of the present invention with the telescopic light assembly in a fully telescoped position.

[0023] FIG. 7 shows a rear view of the easy-guide portable light tower system of the present invention with the telescopic light assembly in a fully telescoped position.

[0024] FIG. 8 shows a front view of the easy-guide portable light tower system of the present invention with the telescopic light assembly in an intermediary telescoped position and rotated counter-clock wise.

[0025] FIG. 9 shows a partial perspective view of the telescopic mast.

[0026] FIG. 10 shows a control panel inside an engine/generator housing.

[0027] FIG. 11 shows a top of a fuel tank with a gauge.

[0028] FIG. 12 shows an engine/generator system and radiator.

[0029] FIG. 13 shows a partial side view of the engine/generator housing and storage box.

[0030] FIG. 14 shows a partial front view of the telescopic mast.

[0031] FIG. 15 shows a partial front view of the plurality of telescoping sections.

[0032] FIG. 16 shows a partial rear view of the engine/generator housing

DETAILED DESCRIPTION OF THE INVENTION

[0033] Referring now to the drawings, and more particularly to FIGS. 1-2 the easy-guide portable light tower system

is shown. The easy-guide portable light tower system is generally designated at reference numeral 10 and is shown with the telescopic light assembly in a stowed position.

[0034] Referring specifically to FIG. 1, the easy-guide portable light tower system 10 includes a telescopic light assembly 20 swivelly mounted to a skid 50. The telescopic light assembly 20 is mounted to swivel in a Y-plane clock-wise and counter-clock wise as be seen in FIGS. 8 and 14. The swivel connection of the telescopic light assembly 20 is adapted to be rotated up to 360°. The telescopic light assembly 20 is constructed and arranged to telescope from a stowed position (FIG. 1) at zero degrees (0°) to a fully telescoped position (FIGS. 6 and 7). The telescopic light assembly 20 is not constructed to be rotated to and/or from a horizontal plane to a vertical plane.

[0035] The telescopic light assembly 20 includes a telescopic mast 22 having a mast base 22a from which a plurality of telescoping sections 24 are telescoped. The top telescoping section (herein after referred to as "top telescoping section 24a") has mounted perpendicularly thereto a crossbar member 26 so as to form a T-shaped telescopic support for a plurality of lights 28. The crossbar member 26 essentially creates two arms to hang or support the plurality of lights 28.

[0036] In the exemplary embodiment, the telescopic mast 22 is made of galvanized structural steel. The telescopic mast 22 is capable of telescoping 16 ft. and is a single stage boom.

[0037] Referring also to FIG. 14, the telescopic light assembly 20 includes a hand winch 140 with a locking break and operating handle 144. The hand winch 140 has wound a galvanized cable 142 coupled to a stainless steel pulley 146 which is mounted on bracket 163 (FIGS. 8 and 9).

[0038] Referring to FIGS. 8 and 9, a bracket 163 is attached at a top of each telescoping section 24 (excluding topmost section 24a). A stainless steel pulley 146 is mounted to each bracket 163. A separate galvanized cable 146a, 146b and 146c is terminated on one end at each bracket 163. Said cables 146a-146c are coupled to the pulley 146 attached to the telescoping section adjacent to and above the telescoping section to which each cable is terminally attached.

[0039] In the exemplary embodiment, the plurality of lights 28 are arranged in pairs. One pair of lights 28 is on a left arm of the crossbar member 26 while the other pair is supported from the right arm of the crossbar member 26. Each light 28 is adjustably mounted, to the left arm or the right arm, via a bracket 30. In the views, there are four lights 28. Nevertheless, more or less lights may be included.

[0040] Each of lights 28 may include a metal Halon (Class 1 Div 2) 400 Watt Light with fixture (FIG. 4). The lights 28 further include a retractable cord (not shown) and a circuit breaker protected weatherproof enclosure 29.

[0041] The bracket 30 is generally U-shaped and can be adjustably rotated essentially 360° about the arm in the Y-plane and fastened via fastener 32. As the bracket is rotated, the light enclosure 29 is rotated accordingly. The fasteners 34 to fasten the light enclosure 29 to the bracket 30 allows the light enclosure 29 to be adjusted in a 360° rotation about the X-axis while the bracket 30 is stationary or fastened via fastener 32. As can be readily seen, the bracket 30 provides multiple degrees of variability for orienting the lights 28.

[0042] The skid 50 has fixedly coupled thereto a top-mounted cage 60. Together the skid 50 and cage 60 form a transport enclosure to protect and carry the telescopic light assembly 20. The skid 50 has a generally box shaped foot print which may be rectangular or square. The skid 50

includes a four-sided perimeter frame structure 52. Each corner of the four-sided perimeter frame structure 52 has fixed mounted thereto a bottom-end of vertical support members 62. The top-end of the vertical support members 62 are strapped or secured together by horizontal support members 64. Free-ends of a horizontal support member 64 are fixedly coupled to two adjacent vertical support members 62.

[0043] The skid 50 is made of structural steel all welded and galvanized. The skid 50 includes a beveled Drip Pan with a bottom drain, forklift pockets 53 (FIG. 2), and vibration isolators under the engine/generator sub-assembly 100.

[0044] The cage 60 is essentially defined by the vertical support members 62 and the horizontal support members 64. The cage 60 further includes eye pads 66 mounted to or in close proximity to the top-end of the vertical support members 62. The cage 60 of the transport enclosure further includes a pair of stabilizing channels 68, as best seen in FIG. 3, for the telescopic light assembly 20 in the stowed position.

[0045] Referring now to FIGS. 3 and 5, the stabilizing channel 68 is depicted mounted to a right side of the cage 60. The stabilizing channel 68 by way of example is supported from a right one of the horizontal support member 64. The other stabilizing channel 68 is supported from a left one of the horizontal support members 64. The stabilizing channel 68 provides a guide or channel 68 to store a free end of the crossbar 26 of the telescopic light assembly 20 in the stowed position. The telescopic mast 22 should also be at zero degrees (0°). In the exemplary embodiment, the telescopic light assembly 20 when stowed or being lowered into the transport enclosure, should be at zero degrees (0°) so as not to contact the cage 60. Nevertheless, if the cage 60 was sufficiently larger than the width of the crossbar 26 the telescopic light assembly 20 could be lowered when rotated to a degree other than 0°. However, in such a case, the transport enclosure would be larger.

[0046] The stabilizing channel 68 is generally V-shaped. Nevertheless, other shapes may be used. In this embodiment, the width of the lowest end of the stabilizing channel 68 is narrower than the upper end of the stabilizing channel 68. The width of the lowest end of the stabilizing channel 68 limits the movement forward and backward of the free end of the crossbar member 26 or arm thereof.

[0047] As can be appreciated, the width and height of the transport enclosure is constructed to fully recess or confine the telescopic light assembly 20 when in the stowed position, as best seen in FIG. 1. In the exemplary embodiment, the width and height of the transport enclosure define the horizontal and vertical perimeter boundaries of the transport enclosure. The horizontal and vertical perimeter boundaries of the transport enclosure closely track (with minimum clearance) the height and width of the telescopic light assembly 20 when in the stowed position such that the telescopic light assembly 20 is fully lowered.

[0048] In other words, the transport enclosure is minimized in size so that its size does not take up unnecessary real estate on an oil-field platform or other off-shore structure while also fully enclosing the telescopic light assembly 20.

[0049] As can be appreciated during transport, loading and unloading, or when on an off-shore platform or drilling rig, the telescopic light assembly 20 could move as the result of strong impact forces. The stabilizing channels 68 stabilize the left and right light supporting arms defined by the crossbar member 26 when the telescopic light assembly 20 is in a

stowed position. Thus, the impact forces articulated to the plurality of lights **28** may be reduced to minimize breakage of the light bulbs **31** (FIG. 4).

[0050] Referring again to FIGS. 1 and 6, the left side of the easy-guide portable light tower system **10** includes a storage box **80** having an enclosure **82** closed via lid **84**. The storage box **80** is mounted on the skid **50**. One side of the storage box **80** is hingedly coupled to the enclosure **82**. The other side of the lid **84** is adapted to be held closed via at least one latching or locking member **86**. In general, the storage box **80** is similar to a tool box. The storage box **80** is made of a non-corrosive metal such as without limitation aluminum.

[0051] With specific reference to FIGS. 10, 12, 13 and 16, the engine/generator assembly **100** is housed in an engine/generator housing **102**. The rear of the housing **102** has a plurality of access panels **104** and **106**. The left side of the housing **102** includes a door **108** having a vent **110** formed therein. In the housing **102** adjacent the door **108** is a radiator **112**. FIGS. 12 and 13 illustrate the engine/generator sub-assembly **100** and various components thereof.

[0052] In the exemplary embodiment, the engine is a Kubota Diesel Engine which is three-cylinder liquid cooled (14 hp @ 1800 rpm). The engine has a mounted radiator **112**, a coolant recovery tank, an air cleaner, a manual air intake shutdown **116** (FIG. 12), and a muffler. As best seen in FIG. 1, the top of housing **102** has an emergency shutdown handle **116a** to shutdown the air intake. Furthermore, the engine includes a spark arrestor, a 12 volt electric start, a secondary fuel filter, an electric fuel pump with a primary Racor fuel filter, F.W. Murphy Engine Controls, Hi Temp/Low Oil Shutdown, Hour Meter, and an EZ oil drain valve.

[0053] The generator of the exemplary embodiment is manufactured by Newage. The generator produces 8 KW. The generator includes a dedicated single phase, 4-Pole, Single Bearing system. The generator operates at 1800 rpm, 120/240V. The generator is AC Brushless and is epoxy coated. The generator has an automatic voltage regulator, self excited, dynamically balanced rotor, and is fan cooled. The engine and generator above are just examples of suitable engines and generators and may be substituted with similar devices of other manufacturers.

[0054] FIG. 10 shows a control panel **120** accessed through the access panel **104**. FIG. 11 illustrates a top view of the fuel tank **180**. The fuel tank **180** stores the fuel for operating the engine/generator sub-assembly **100**. The top of the fuel tank **180** includes a removable cap **182** for refilling the fuel tank **180**. The fuel tank **180** also includes a fuel gauge **184**. By way of example, the fuel tank **180** holds 30 Gallons and is a C.G. (Coast Guard) Approved Fuel Tank with a bottom drain.

[0055] FIG. 2 shows a (right) side view of the easy-guide portable light tower system **10** of FIG. 1. FIGS. 3 and 5 show views of the telescopic light assembly **20** in the stowed position. With reference to FIGS. 5 and 7, the easy-guide portable light tower system **10** further includes an electric cable feed chamber **130** parallel and behind the telescopic mast **22** of the telescopic light assembly **20**. The electrical cable feed chamber **130** houses (stores) and protects the electric cable **132** therein. The electric cable **132** provides power to the plurality of lights **28**. The electrical cable **132** is shown having a coiled or spiraling profile. Under gravity, the electric cable **132** is automatically stowed in and dispensed from the electric cable feed chamber **130**.

[0056] Gravity and/or the coiled properties of the electric cable **132** allow the cable **132** to automatically fall or re-coil

in the electric cable feed chamber **130**. This feature eliminates loose cable wires from just hanging around on the skid **50** or on other structures. Thus, the electric cable **132** has less chances of being tangled when the telescopic mast **22** is raised. This also eliminates other entanglement of the electric cable **132** since it is neatly stowed in the electric cable feed chamber **130**.

[0057] FIG. 7 shows a rear view of the easy-guide portable light tower system **10** of the present invention with the telescopic light assembly **20** in a fully telescoped position. The coiled electric cable **132** is pulled from the electric cable feed chamber **130** as the telescopic mast **22** is raised or telescoped. As the telescopic light assembly **20** is lowered, the coiled electric cable **132** is automatically filled or recoiled in the electric cable feed chamber **130**.

[0058] FIG. 6 shows a front view of the easy-guide portable light tower system **10** of the present invention with the telescopic light assembly **20** in a fully telescoped position. FIG. 8 shows a front view of the easy-guide portable light tower system **10** of the present invention with the telescopic light assembly **20** in an intermediary telescoped position and rotated counter-clock wise.

[0059] With specific reference to FIGS. 8 and 14, the telescopic mast **22** includes a band **150** with a locking pin **152**. The locking pin **152** locks the telescopic mast **22** to a particular degree of rotation in the Y-plane. In FIG. 1, the degree of rotation is 0°. FIG. 8 illustrates other degrees of rotation at which the telescopic mast **22** can be locked.

[0060] In operation, the telescopic mast **22** is telescoped or raised by rotating the winch handle **144**. As handle **144** is rotated, each mast section **24** is raised an equivalent amount, the cables **142a-142c** being held in tension as the sections are raised. (FIGS. 8 and 9). Thus, various heights can be achieved. In the exemplary embodiment, the maximum height is 16 feet. However, other heights can be achieved with different lengths of the telescoping sections **24**.

[0061] Referring now to FIGS. 9, 14 and 15, the top of the mast base **22a** and the top of the intermediate telescoping sections **24** each have a plurality of pads **160** to create a frictionless surface between two adjacent and concentric telescoping sections **24** or mast base **22a**. Each pad **160** is removably coupled to a bracket **162** via fasteners **164**. The brackets **162** are secured to the top end of the mast base **22a** and the intermediate telescoping sections **24**. At least three sides of the sections **24** have a bracket associated therewith. Each bracket has a pad **160**.

[0062] In the exemplary embodiment, the plurality of frictionless surfaces or pads **160** are made of Teflon, Graphite or the like. Thus, a frictionless surface is created without the need for oil or other lubricants.

[0063] In FIGS. 1 and 2, a switch panel **172** is positioned below the power outlets **170** to turn on and off the outlets **170**. The switch panel **172** is shown behind the partially removed door. (FIG. 2). The bank of outlets **170** includes at least one emergency shutoff switch **174**. In the exemplary embodiment, two emergency shutoff switches **174** are provided. The outlets **170** are split between the two switches **174**. Nevertheless, other configurations may be used. In the exemplary embodiment, all of the outlets **170** are 110V. However, other voltages may be used.

[0064] The power outlets **170** include 110V Explosion Proof Receptacles (Class 1 & 2), circuit breaker protected.

[0065] In the exemplary embodiment, the dimensions of the transport enclosure is approximately L 72"xW 72"xH 85"

with a dry weight of approximately 2200 lbs. The telescopic light assembly **20** is mounted to the transport enclosure and is operable to telescope vertically to extend beyond the vertical perimeter boundary or height. Moreover, the telescopic light assembly **20**, when stowed, is fully recessed and confined in the transport enclosure within the vertical and horizontal perimeter boundaries defined by the height H and width W.

[0066] The system **10** is preferably made of the highest quality components available. It is designed in form and function to meet offshore duty requirements. The skid design insures protection to all components. The engine/generator sub-assembly **100** is rated for continuous duty operation. The mast and transport enclosure are preferably made of galvanized steel. Nevertheless other non-corrosive metals such as without limitation aluminum may be used. The mast is made of $\frac{3}{16}$ " square tubes.

[0067] The housing **102** and fuel tank **180** are also made of non-corrosive metals.

[0068] The previous description of the disclosure is provided to enable any person skilled in the art to make or use the disclosure. Various modifications to the disclosure will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other variations without departing from the spirit or scope of the disclosure. Thus, the disclosure is not intended to be limited to the examples described herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

1. A system comprising:
 - a transport enclosure constructed and arranged for an off-shore environment and having a horizontal perimeter boundary and a vertical perimeter boundary; and
 - a telescopic light assembly mounted to the transport enclosure and operable to telescope vertically to extend beyond the vertical perimeter boundary and which when stowed is fully recessed and confined in the transport enclosure within the vertical and horizontal perimeter boundaries.
2. The system of claim 1, wherein the telescopic light assembly comprises:
 - a telescopic mast;
 - a crossbar perpendicularly coupled about a center thereof to a top end of the telescopic mast forming left and right arms; and
 - a plurality of lights coupled to the left and right arms.
3. The system of claim 2, wherein the transport enclosure comprises:
 - a skid; and
 - a cage with vertical support members and horizontal support members, wherein lower ends of the vertical support members are coupled to corners of the skid and the horizontal support members are coupled to the top ends of the vertical support members; and
 - stabilizing channels supported from two parallel horizontal support members in proximity to receive free ends of the left and right arms when the mast is essentially at zero degrees.
4. The system of claim 2, wherein the telescopic mast is adapted to be rotated in a Y-plane.
5. The system of claim 2, wherein the telescopic mast comprises a plurality of concentric telescoping sections,

wherein a top of each telescoping section has a plurality of pads to create a frictionless surface between two adjacent telescoping sections.

6. The system of claim 2, wherein the telescopic mast comprises a plurality of concentric telescoping sections, wherein a top of each telescoping section has a plurality of frictionless surfaces between two adjacent telescoping sections.

7. The system of claim 6, wherein the plurality of frictionless surfaces includes Teflon.

8. The system of claim 6, wherein the plurality of frictionless surfaces are oil or lubricant free.

9. The system of claim 6, wherein the plurality of frictionless surfaces includes at least one of Teflon and Graphite.

10. The system of claim 6, wherein the plurality of frictionless surfaces include removable pads made of at least one of Teflon and Graphite.

11. The system of claim 1, wherein the telescopic light assembly is directly mounted to the transport enclosure in a vertically upright position and is stowed in the vertically upright position.

12. The system of claim 1, wherein the telescopic light assembly is directly mounted, swivelly, to a skid of the transport enclosure.

13. The system of claim 1, further comprising a bank of receptacles constructed for the off-shore environment mounted to the transport enclosure.

14. The system of claim 1, further comprising:

- an engine/generator; and
- a housing mounted within the transport enclosure to house the engine/generator.

15. The system of claim 14, further comprising a fuel tank mounted within the transport enclosure.

16. The system of claim 15, wherein the fuel tank is mounted immediately adjacent to the housing of the engine/generator.

17. The system of claim 1, wherein the transport enclosure includes an electric cable chamber which stores a coiled electric cable which delivers power to lights of the telescopic light assembly, the electric cable chamber is arranged to automatically dispense therefrom and receive therein the electric cable.

18. The system of claim 1, wherein the telescopic mast comprises a plurality of concentric telescoping sections, wherein a top of each telescoping section has a plurality of frictionless surfaces between two adjacent telescoping sections; and further comprising:

- a hand winch and operating handle coupled to the telescopic mast and a galvanized cable with stainless steel pulleys, wherein the galvanized cable and stainless steel pulleys are coupled to the plurality of concentric telescoping sections to raise or lower the plurality of concentric telescoping sections as the hand winch is rotated to wind or unwind the galvanized cable.

19. A system comprising:

- means for illuminating;
- means for telescoping vertically the illuminating means;
- means coupled to the telescoping means for easy gliding vertical extension of the telescoping means;
- means for transporting and enclosing the telescoping means fully within a horizontal perimeter boundary and a vertical perimeter boundary thereof.

20. The system of claim 19, further comprising a means for supporting the illuminating means to a left and right of a top and center of the telescoping means.

21. The system of claim 19, wherein the transporting and enclosing means comprises:

means for caging the telescoping means and the illuminating means; and

means, coupled to the caging means, for stabilizing the illuminating means on the left and right.

22. The system of claim 20, wherein the telescoping means includes means for rotating the telescoping means in a Y-plane.

23. The system of claim 20, wherein the telescoping means comprises a plurality of concentric telescoping sections, wherein a top of each telescoping section has a plurality of pads to create a frictionless surface between two adjacent telescoping sections.

24. The system of claim 20, wherein the telescoping means comprises a plurality of concentric telescoping sections, wherein a top of each telescoping section has a plurality of frictionless surfaces between two adjacent telescoping sections.

25. The system of claim 24, wherein the plurality of frictionless surfaces includes Teflon.

26. The system of claim 24, wherein the plurality of frictionless surfaces are oil or lubricant free.

27. The system of claim 24, wherein the plurality of frictionless surfaces includes at least one of Teflon and Graphite.

28. The system of claim 24, wherein the plurality of frictionless surfaces include removable pads made of at least one of Teflon and Graphite.

29. The system of claim 19, further comprising means for directly mounting and stowing the telescoping means to the transporting and enclosing means in a vertically upright position.

30. The system of claim 19, wherein the mounting means includes means for swiveling the telescoping means clockwise or counter-clockwise relative to the transporting and enclosing means.

31. The system of claim 19, further comprising a bank of receptacles constructed for an off-shore environment mounted to the transporting and enclosing means.

32. The system of claim 19, further comprising:

means for generating power; and

means, coupled to the transporting and enclosing means, for housing the power generating means.

33. The system of claim 32, further comprising means, coupled to the transporting and enclosing means, for storing fuel.

34. The system of claim 19, further comprising means for automatically storing and dispensing an electrical cable, the electrical cable delivering power to the illuminating means.

35. A telescopic light assembly comprising:

a telescopic mast mounted to a base in a vertically upright orientation wherein said mast can only be oriented in said vertically upright orientation;

a crossbar perpendicularly coupled to a top end and center of the telescopic mast forming left and right arms; and a plurality of lights coupled to the left and right arms.

36. The assembly of claim 35, wherein the telescopic mast is adapted to be rotated in a Y-plane.

37. The assembly of claim 35, wherein the telescopic mast comprises a plurality of concentric telescoping sections, wherein the top of each telescoping section has a plurality of pads to create a frictionless surface between two adjacent telescoping sections.

38. The assembly of claim 35, wherein the telescopic mast comprises a plurality of concentric telescoping sections, wherein a top of each telescoping section has a plurality of frictionless surfaces between two adjacent telescoping sections.

39. The assembly of claim 38, wherein the plurality of frictionless surfaces includes Teflon.

40. The assembly of claim 38, wherein the plurality of frictionless surfaces are oil or lubricant free.

41. The assembly of claim 38, wherein the plurality of frictionless surfaces includes at least one of Teflon and Graphite.

42. The assembly of claim 38, wherein the plurality of frictionless surfaces include removable pads made of at least one of Teflon and Graphite.

43. The assembly of claim 38, wherein the telescopic mast is directly mounted, swivelly, to the base.

44. The assembly of claim 38, further comprising a hand winch and operating handle coupled to the telescopic mast and a galvanized cable with stainless steel pulleys, wherein the galvanized cable and stainless steel pulleys are coupled to the plurality of concentric telescoping sections to raise or lower the plurality of concentric telescoping sections as the hand winch is rotated to wind or unwind the galvanized cable.

* * * * *