

(12) **United States Patent**
Garcia et al.

(10) **Patent No.:** **US 9,237,225 B2**
(45) **Date of Patent:** **Jan. 12, 2016**

(54) **APPARATUS WITH DYNAMIC AUDIO SIGNAL PRE-CONDITIONING AND METHODS THEREFOR**

(71) Applicant: **Google Technology Holdings LLC**,
Mountain View, CA (US)

(72) Inventors: **Juan C Garcia**, Grayslake, IL (US); **Joel A Clark**, Woodridge, IL (US); **Tenkasi V Ramabadran**, Oswego, IL (US)

(73) Assignee: **Google Technology Holdings LLC**,
Mountain View, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/955,198**

(22) Filed: **Jul. 31, 2013**

(65) **Prior Publication Data**
US 2014/0270150 A1 Sep. 18, 2014

Related U.S. Application Data

(60) Provisional application No. 61/844,989, filed on Jul. 11, 2013, provisional application No. 61/776,793, filed on Mar. 12, 2013, provisional application No. 61/798,097, filed on Mar. 15, 2013.

(51) **Int. Cl.**
G10L 21/14 (2013.01)
G10L 21/0208 (2013.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04M 3/002** (2013.01); **G10L 21/02** (2013.01); **H04M 9/082** (2013.01); **G10L 21/0208** (2013.01); **G10L 25/48** (2013.01); **G10L 2021/02082** (2013.01); **H04B 3/234** (2013.01)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS

6,778,959 B1 8/2004 Wu et al.
6,839,670 B1 1/2005 Stammer et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 101517550 8/2009
EP 1404147 3/2004
(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion for International Application No. PCT/US2011/029407, mailed Jun. 7, 2011, 10 pages.


(Continued)

Primary Examiner — Fan Tsang
Assistant Examiner — Jeffrey Lytle
(74) *Attorney, Agent, or Firm* — Fish & Richardson P.C.

(57) **ABSTRACT**

An apparatus includes an echo canceller having an audio signal input and an audio signal output and dynamic pre-conditioning logic. The dynamic pre-conditioning logic is operatively coupled to the echo canceller audio signal output as a feedback signal and has a dynamic pre-conditioning logic output operatively coupled to the echo canceller audio signal input. The dynamic pre-conditioning logic is also operative to receive an audio signal input from at least one microphone. The dynamic pre-conditioning logic is operative to analyze the feedback signal to obtain at least one characteristic, and pre-condition the audio signal input, based on the at least one characteristic of the feedback signal, and provide a pre-conditioned audio signal at the echo canceller audio signal input. The echo canceller audio signal output is then provided to a noise suppressor for the send path of a full duplex communication channel.

20 Claims, 5 Drawing Sheets

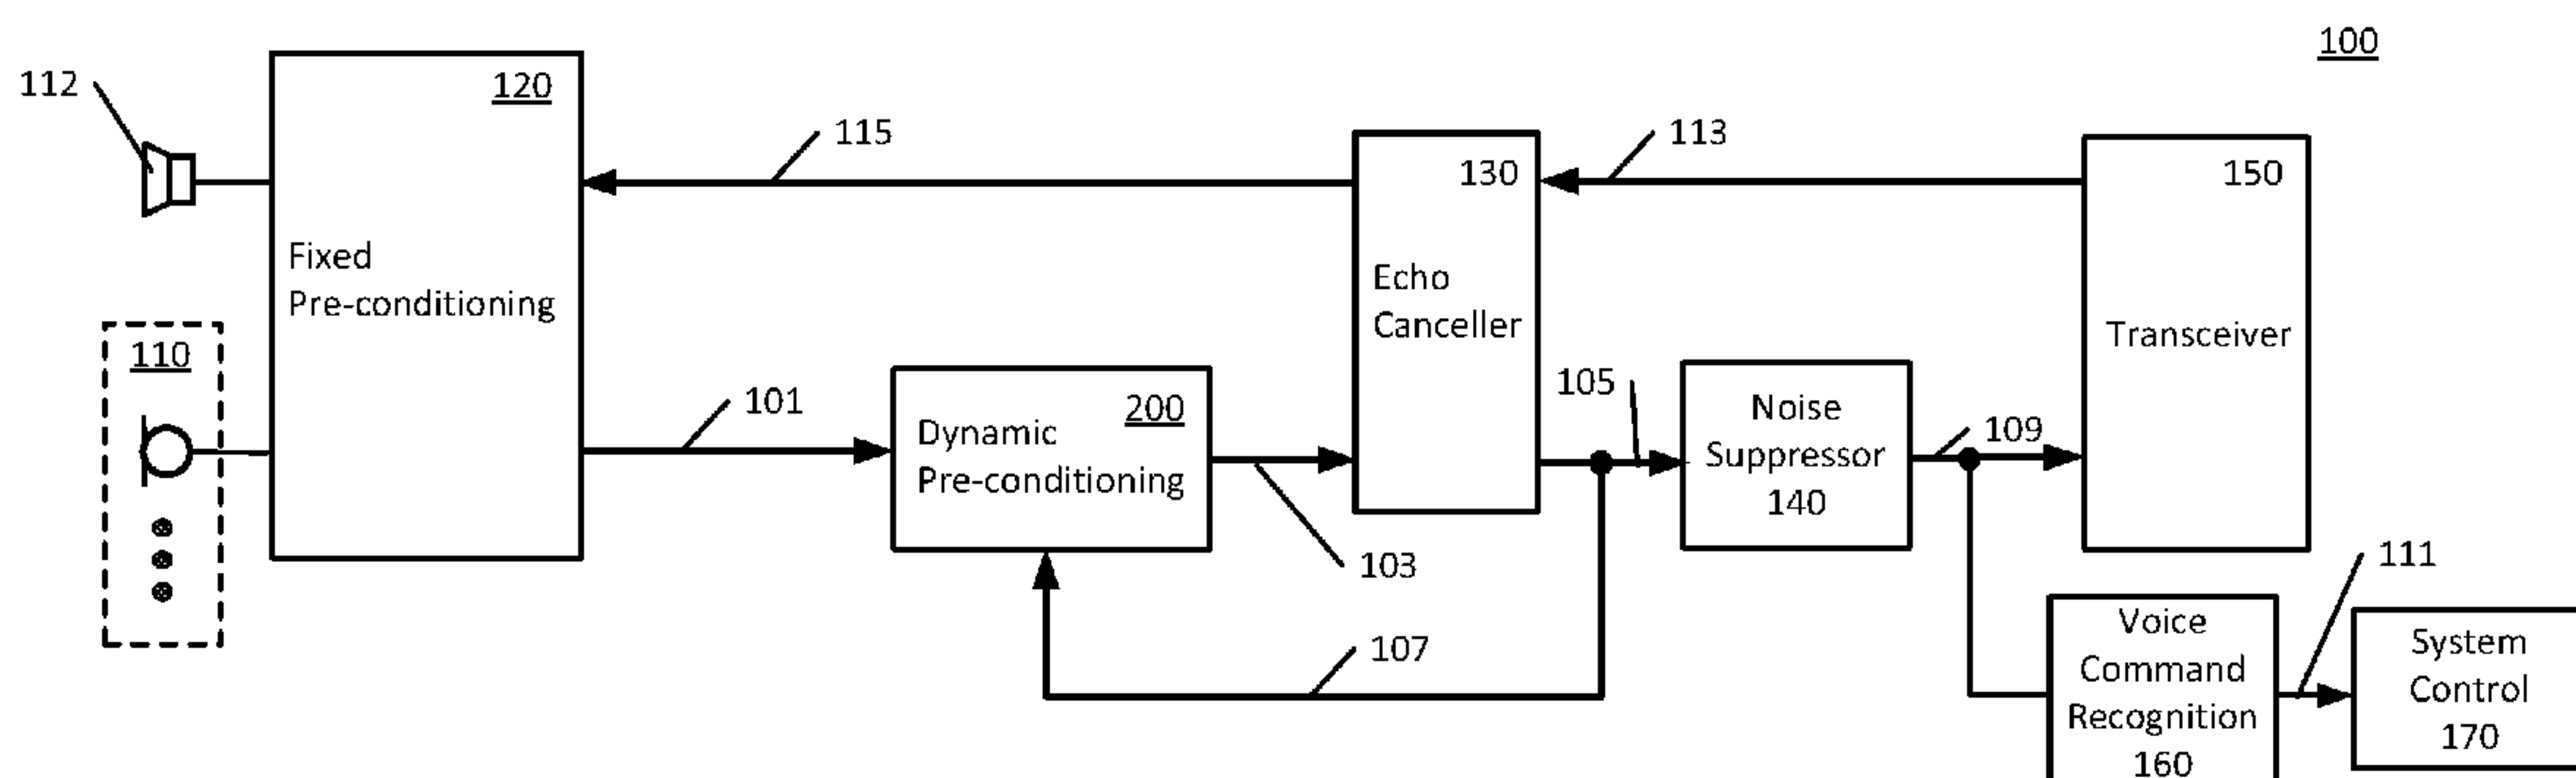

(51)	Int. Cl.		2010/0081487	A1	4/2010	Chen et al.
	<i>H04M 3/00</i>	(2006.01)	2010/0223054	A1	9/2010	Nemer et al.
	<i>G10L 21/02</i>	(2013.01)	2011/0137653	A1	6/2011	Ljolje et al.
	<i>H04M 9/08</i>	(2006.01)				
	<i>G10L 25/48</i>	(2013.01)				
	<i>H04B 3/23</i>	(2006.01)				

FOREIGN PATENT DOCUMENTS

WO	2011/149837	12/2011
WO	2012091643	A1 7/2012

(56) **References Cited**



OTHER PUBLICATIONS

U.S. PATENT DOCUMENTS

6,876,966	B1	4/2005	Deng et al.	
6,950,796	B2	9/2005	Ma et al.	
6,959,276	B2	10/2005	Droppo et al.	
7,257,532	B2	8/2007	Toyama	
7,392,188	B2	6/2008	Junkawitsch et al.	
7,424,426	B2	9/2008	Furui et al.	
7,451,085	B2	11/2008	Rose et al.	
7,941,189	B2	5/2011	Miyauchi	
7,996,220	B2	8/2011	Rose et al.	
8,175,872	B2	5/2012	Kristjansson et al.	
8,219,384	B2	7/2012	Lloyd et al.	
8,265,928	B2	9/2012	Kristjansson et al.	
8,428,940	B2	4/2013	Kristjansson et al.	
8,682,659	B2	3/2014	Kristjansson et al.	
2003/0236099	A1	12/2003	Deisher	
2004/0138882	A1	7/2004	Miyazawa	
2004/0230420	A1	11/2004	Kadambe et al.	
2005/0187763	A1	8/2005	Arun	
2005/0216273	A1	9/2005	Reding et al.	
2005/0243994	A1 *	11/2005	Rayala	379/406.01
2007/0255560	A1 *	11/2007	Rahbar	704/226
2008/0027723	A1	1/2008	Reding et al.	
2008/0091435	A1	4/2008	Strope et al.	
2008/0091443	A1	4/2008	Strope et al.	
2008/0188271	A1	8/2008	Miyauchi	
2008/0221887	A1	9/2008	Rose et al.	
2009/0030687	A1	1/2009	Cerra	
2009/0271188	A1	10/2009	Agapi et al.	
2009/0299742	A1 *	12/2009	Toman et al.	704/233

Bocchieri et al., "Use of geographical meta-data in ASR language and acoustic models", Acoustics Speech and Signal Processing (ICASSP), 2010 IEEE International Conference on IEEE, Mar. 14, 2010, pp. 5118-5121.
International Search Report from related PCT Application No. PCT/US2011/037558, dated Jul. 29, 2011.
International Preliminary Report and Written Opinion from related PCT Application No. PCT/US2011/029407, dated Oct. 26, 2012, 6 pages.
Australian Office Action in Application No. 2011241065, date of issue Dec. 17, 2013, 3 pages.
Chinese Office Action in Application No. 201180019038.8, dated Dec. 19, 2013, 7 pages (English translation).
Mossi et al., "Robust and low-cost cascaded non-linear acoustic echo cancellation," Acoustics, Speech and Signal Processing (ICASSP), 2011 IEEE International Conference on, May 22, 2011, pp. 89-92.
Mossi et al., "Dual amplifier and loudspeaker compensation using fast convergent and cascaded approaches to non-linear acoustic echo cancellation," 2012 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP 2012), Mar. 25, 2012, pp. 41-44.
International Search Report and Written Opinion for International Application No. PCT/US2014/016356, mailed May 2, 2014, 9 pages.
International Preliminary Report on Patentability for International Application No. PCT/US2014/016356, mailed Sep. 24, 2015, 7 pages.

* cited by examiner

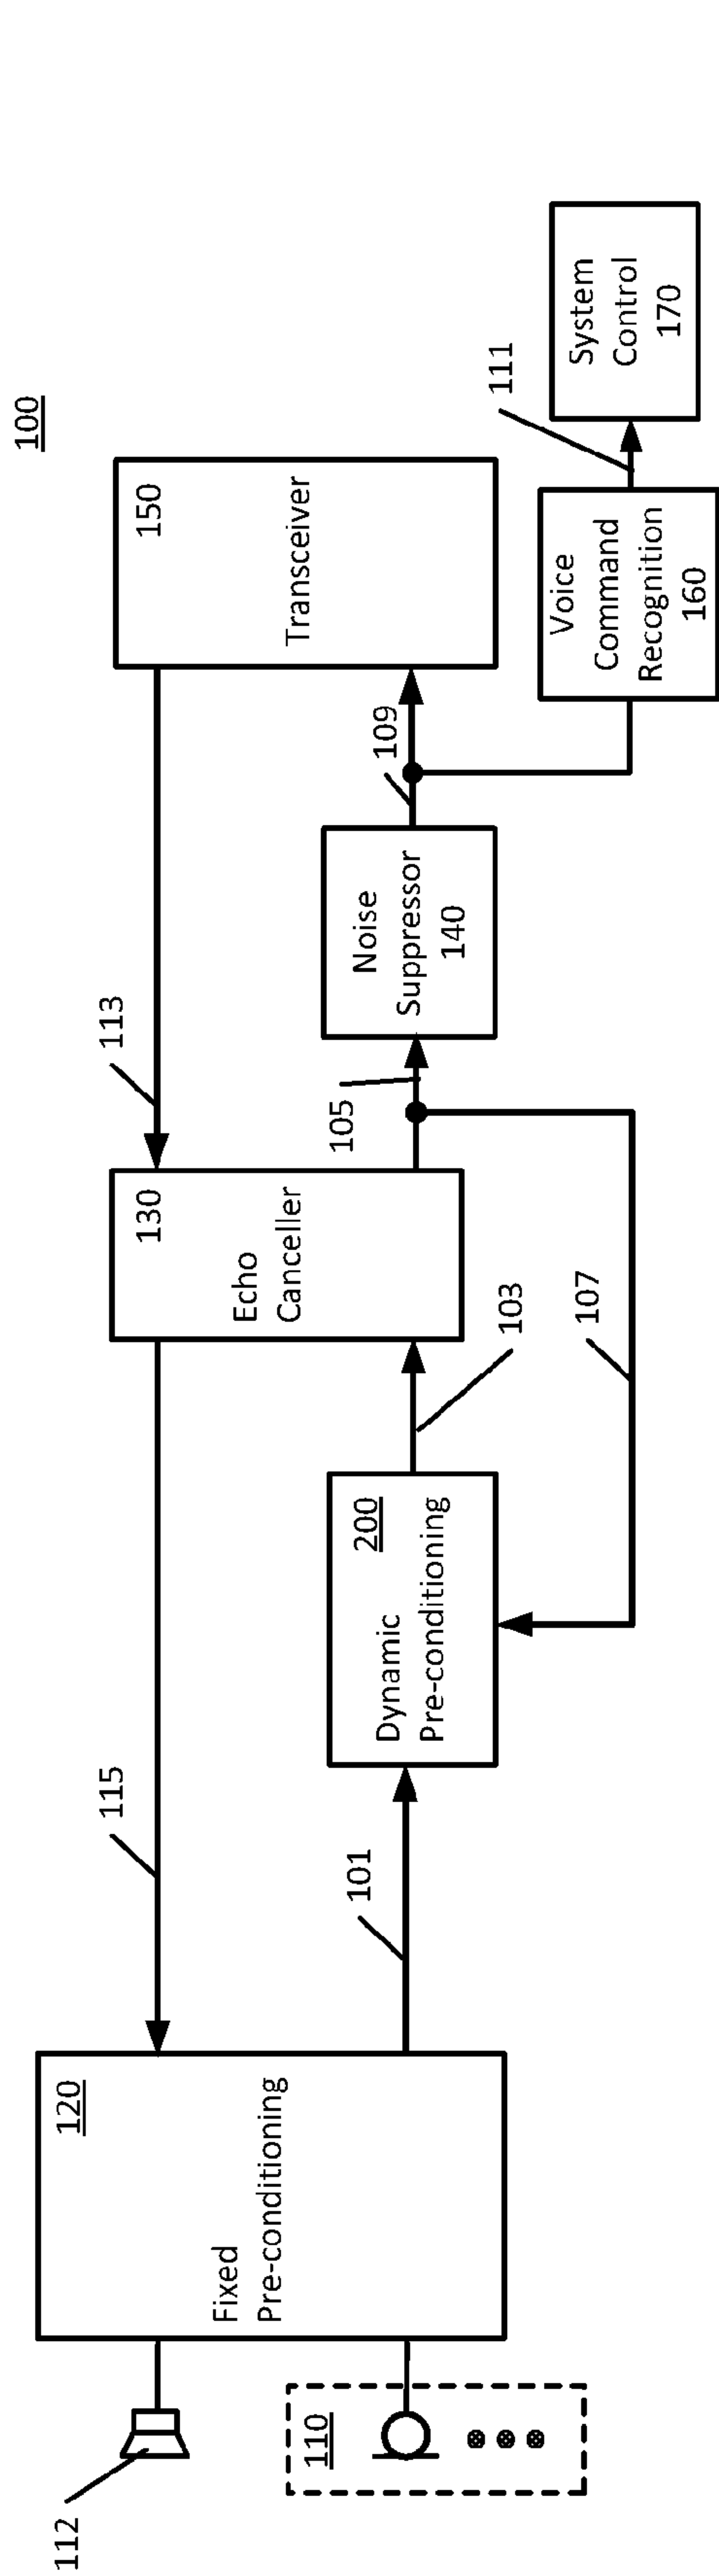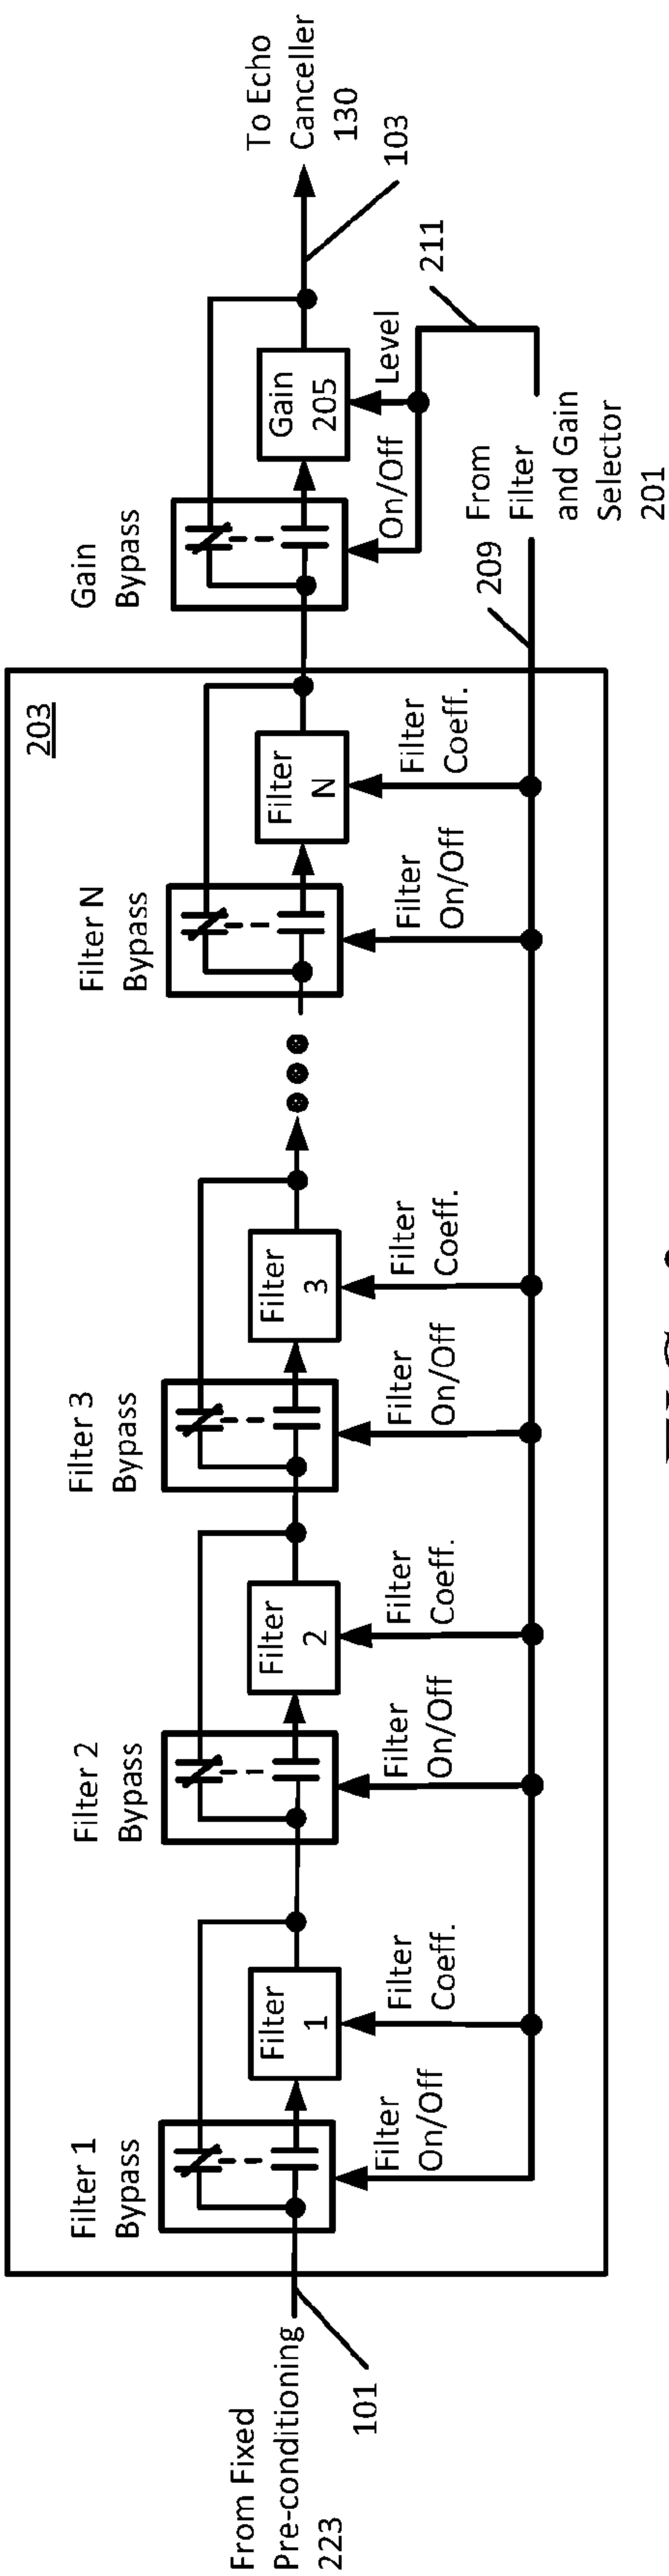



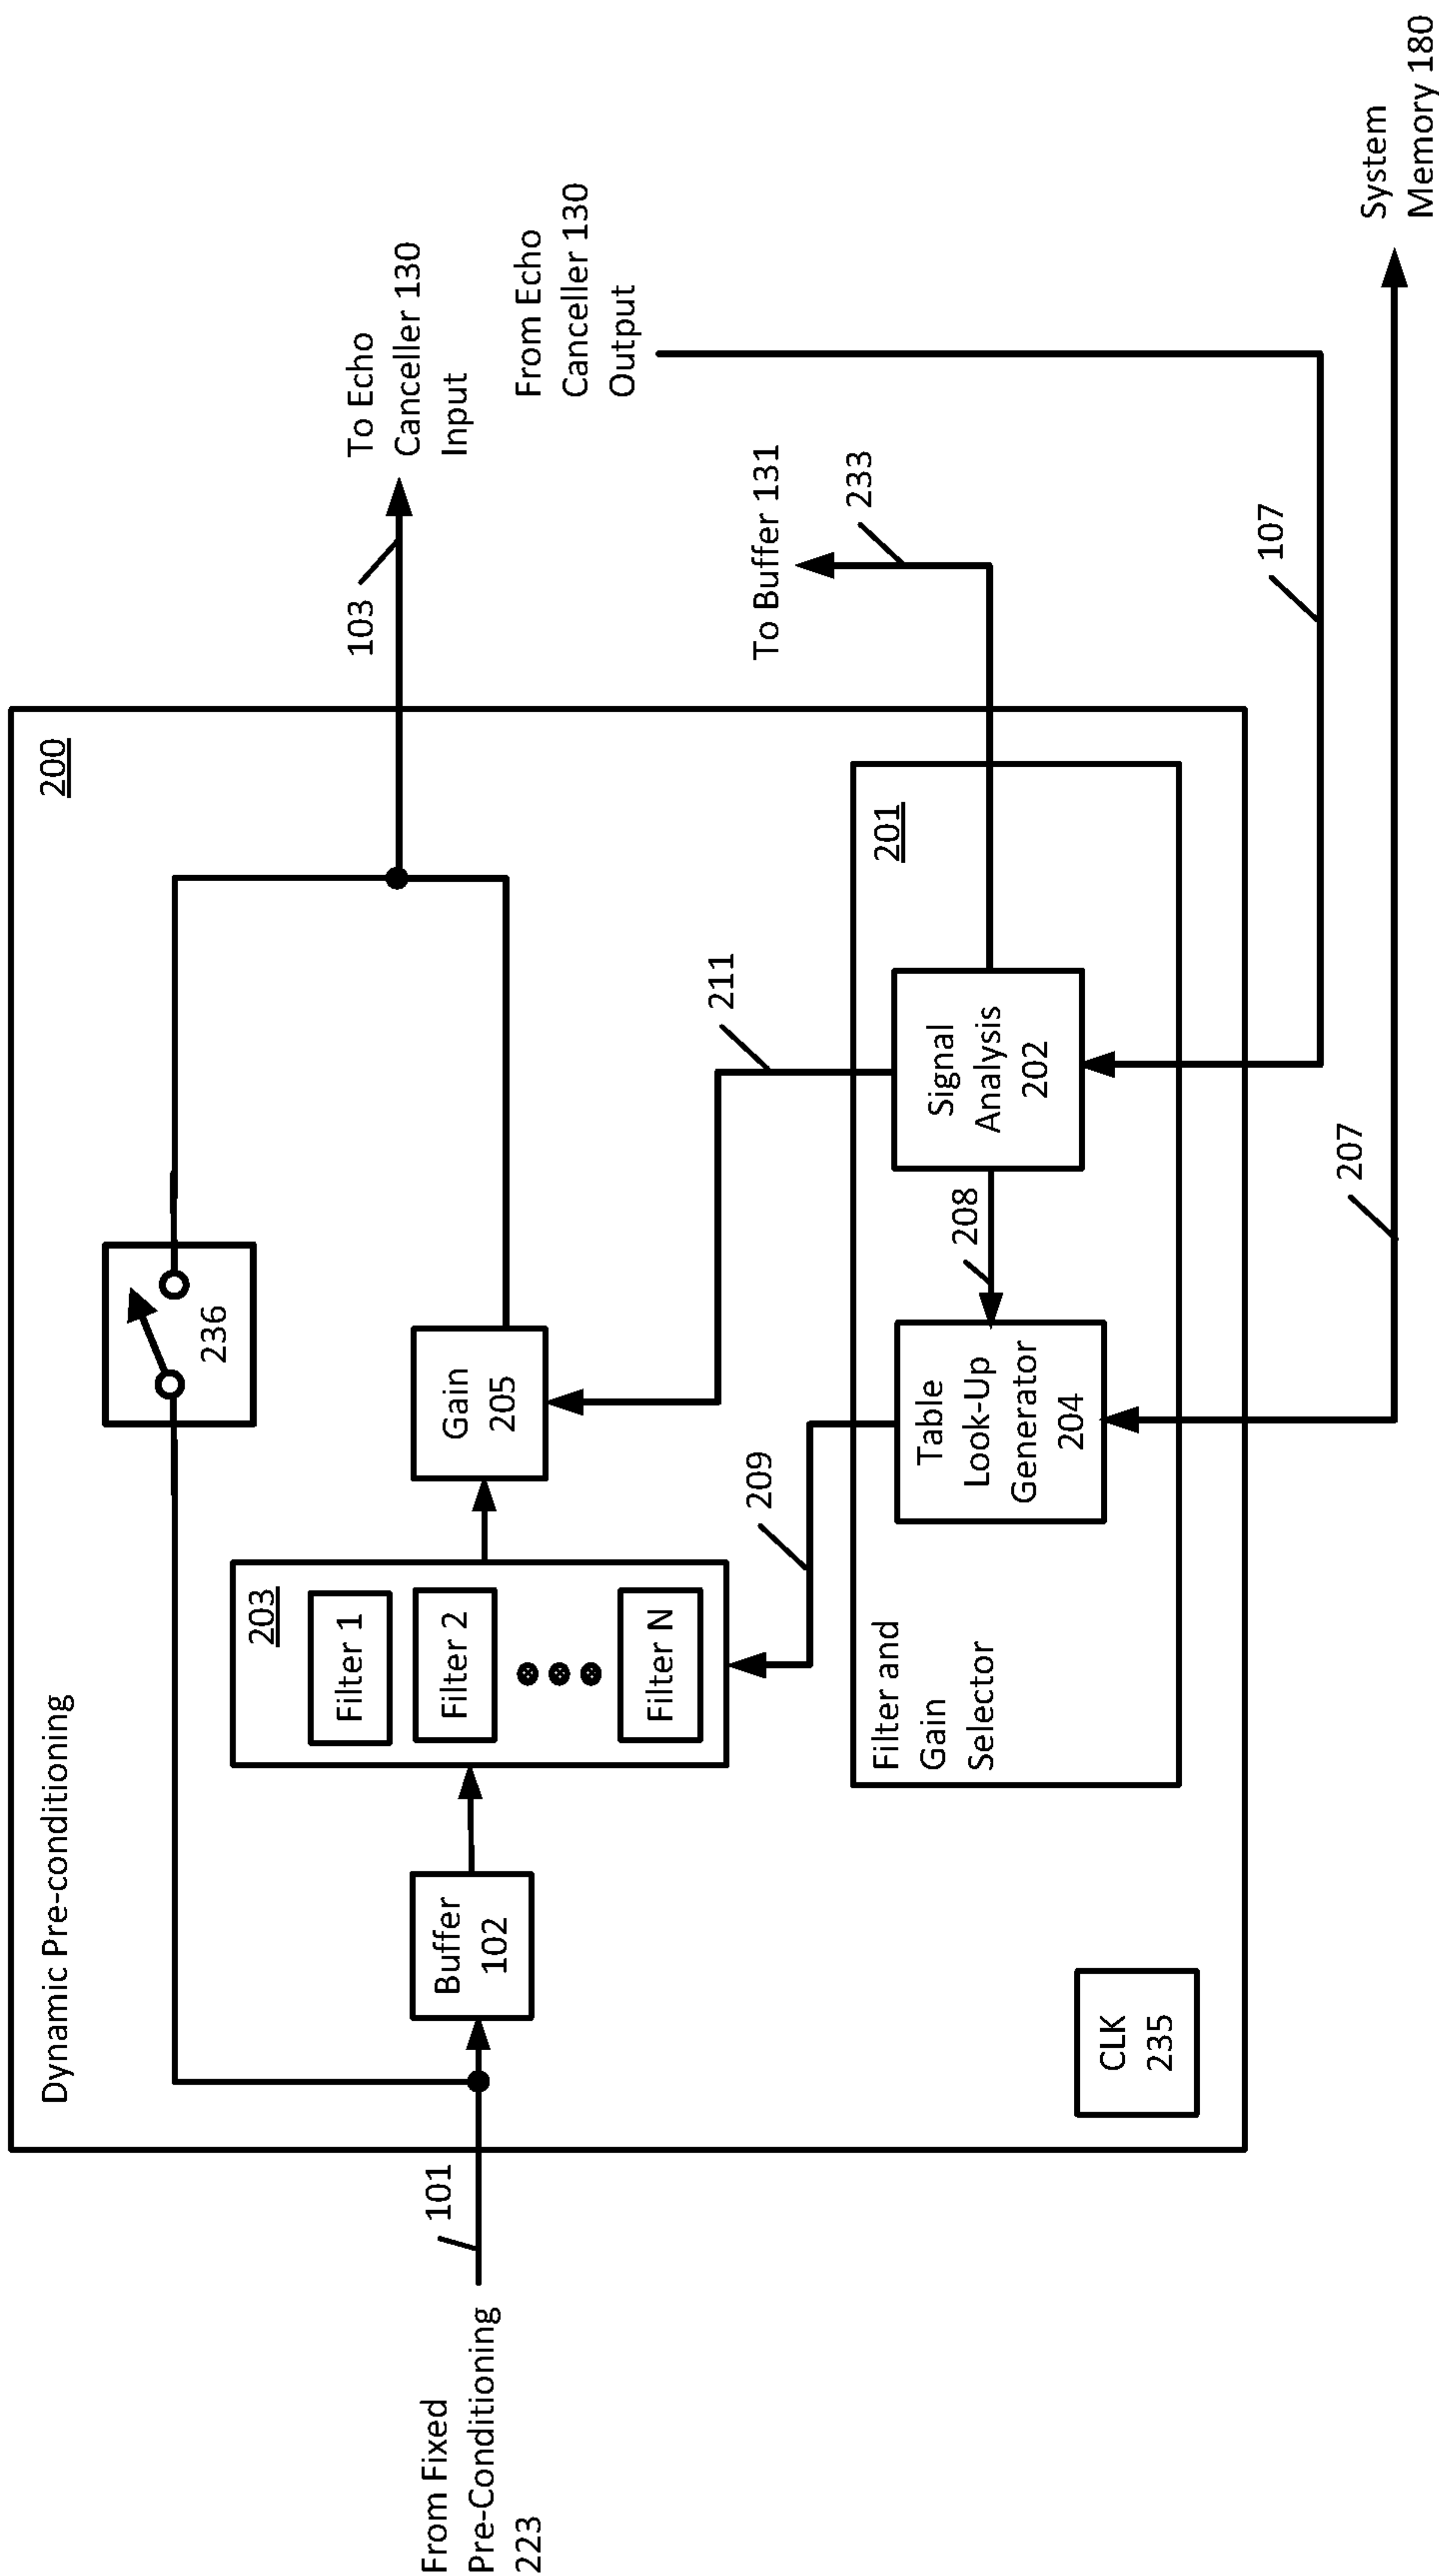


FIG. 4

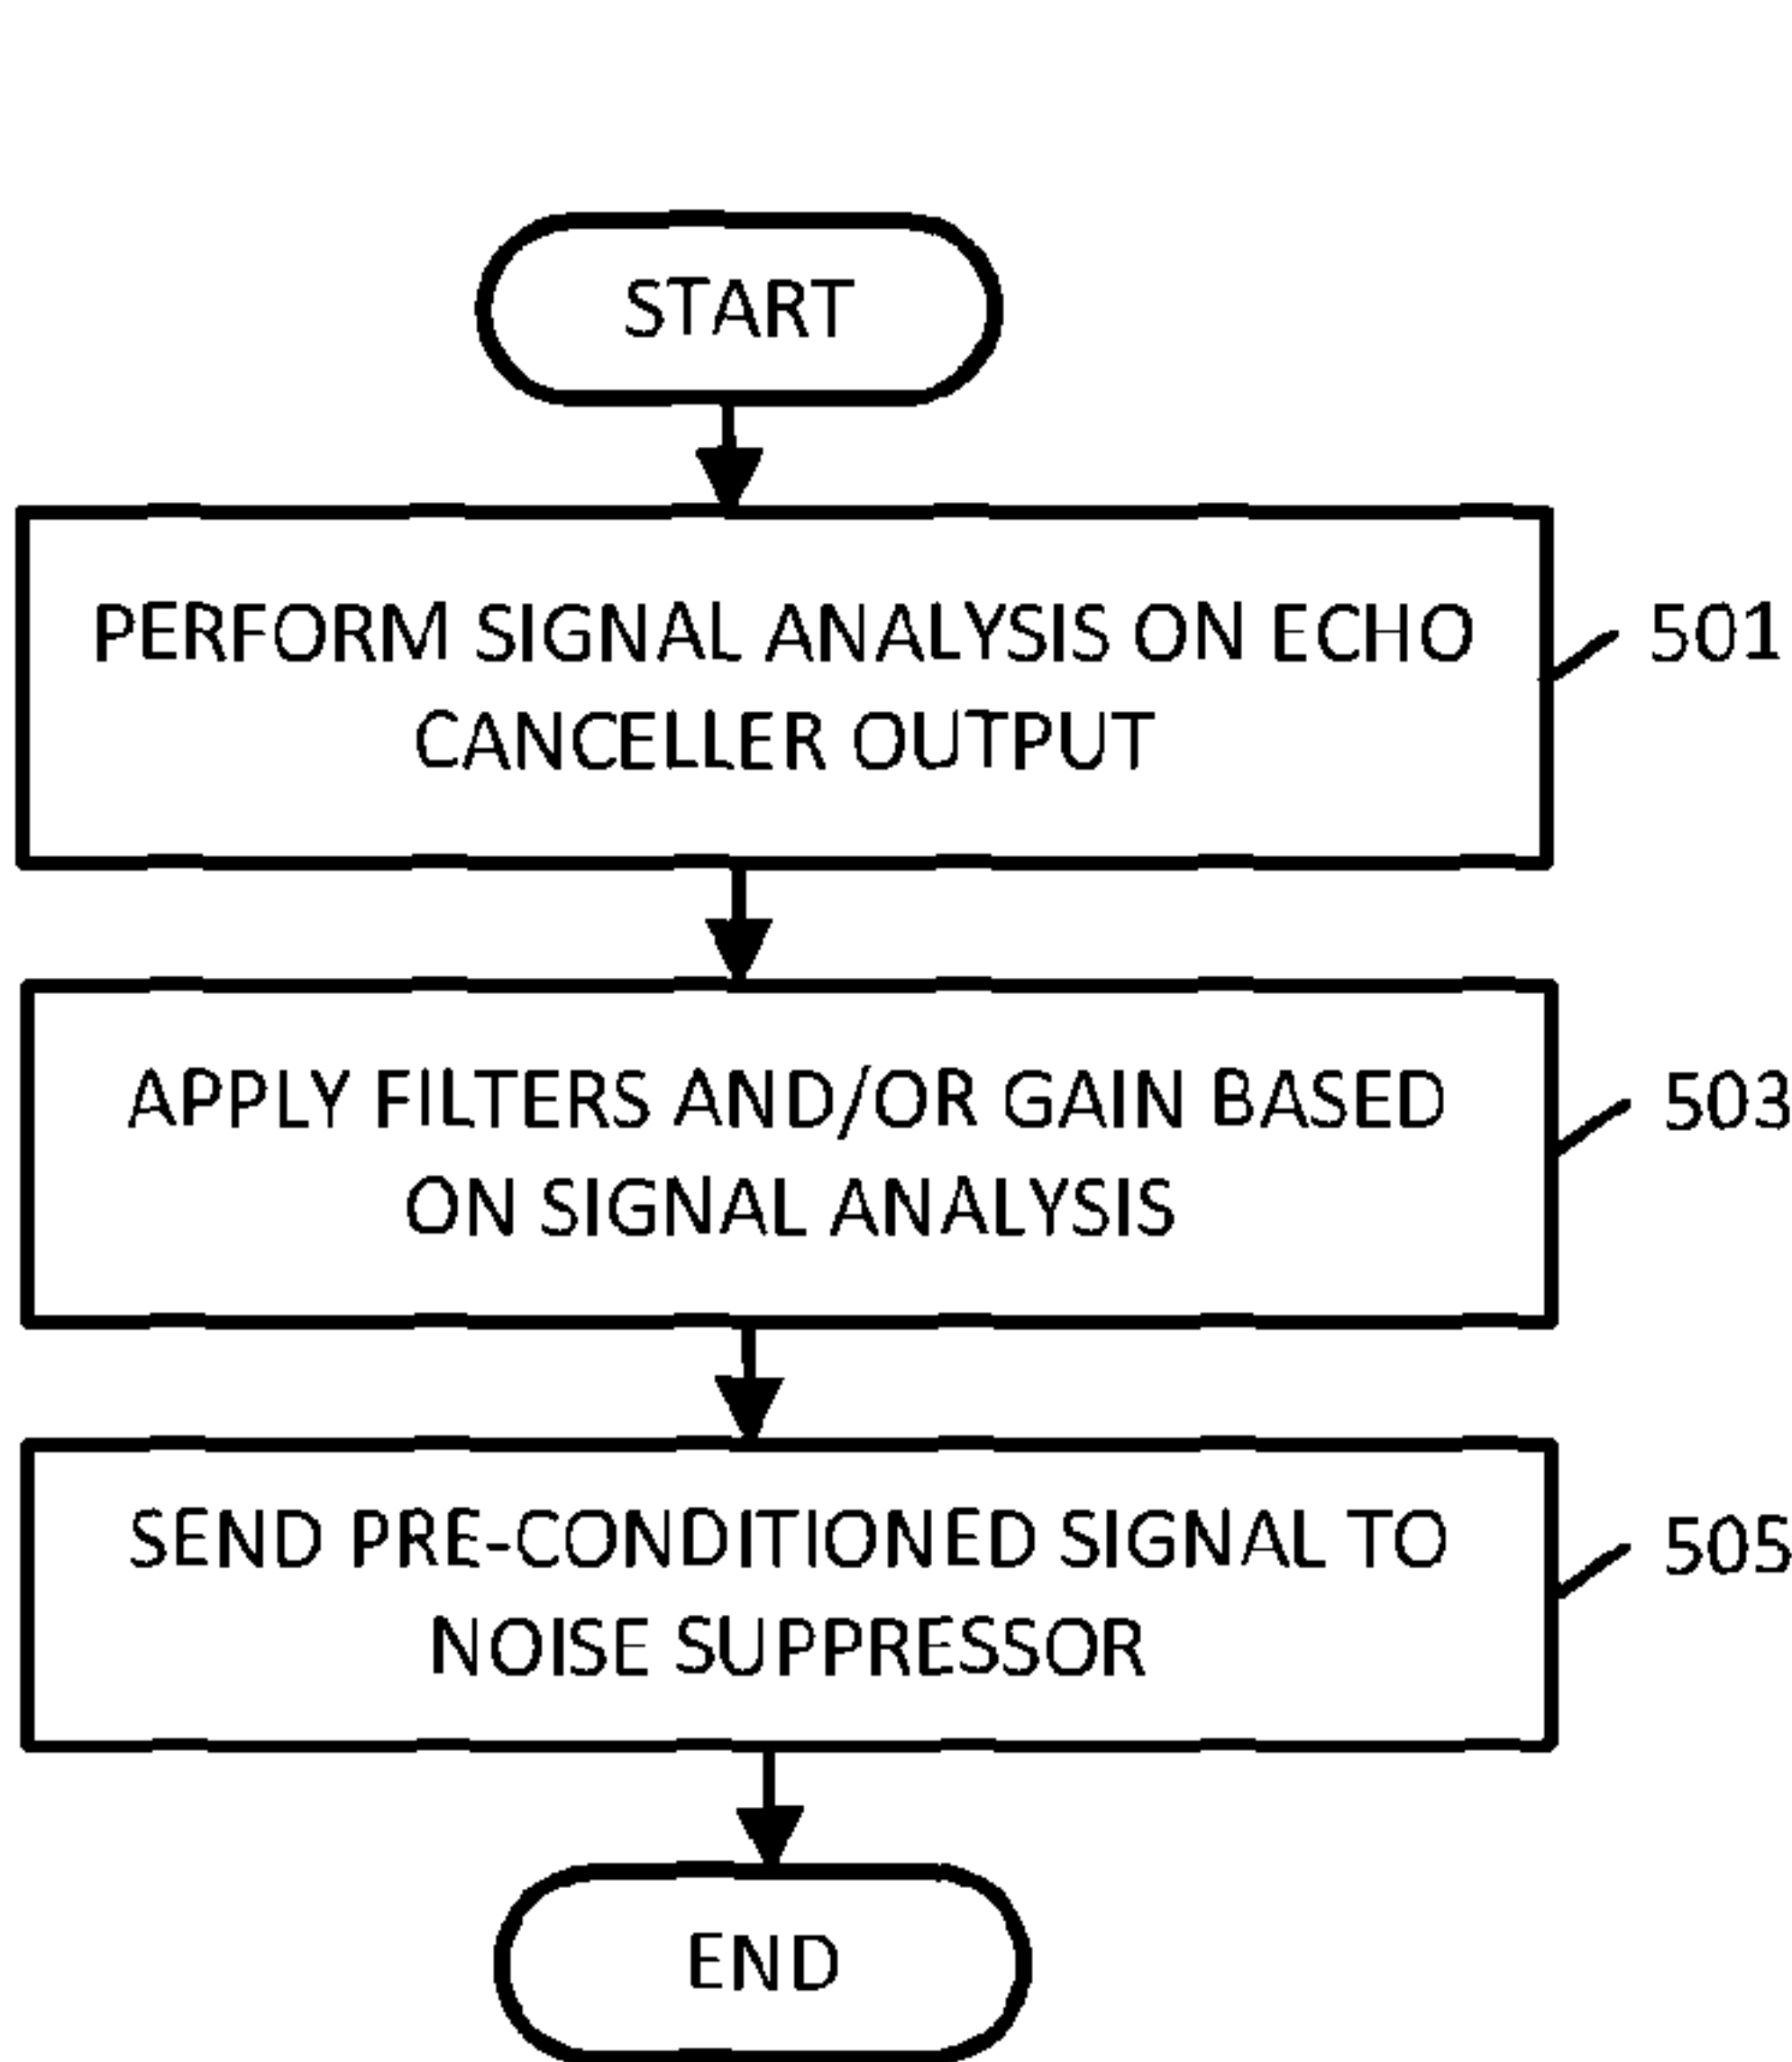


FIG. 5

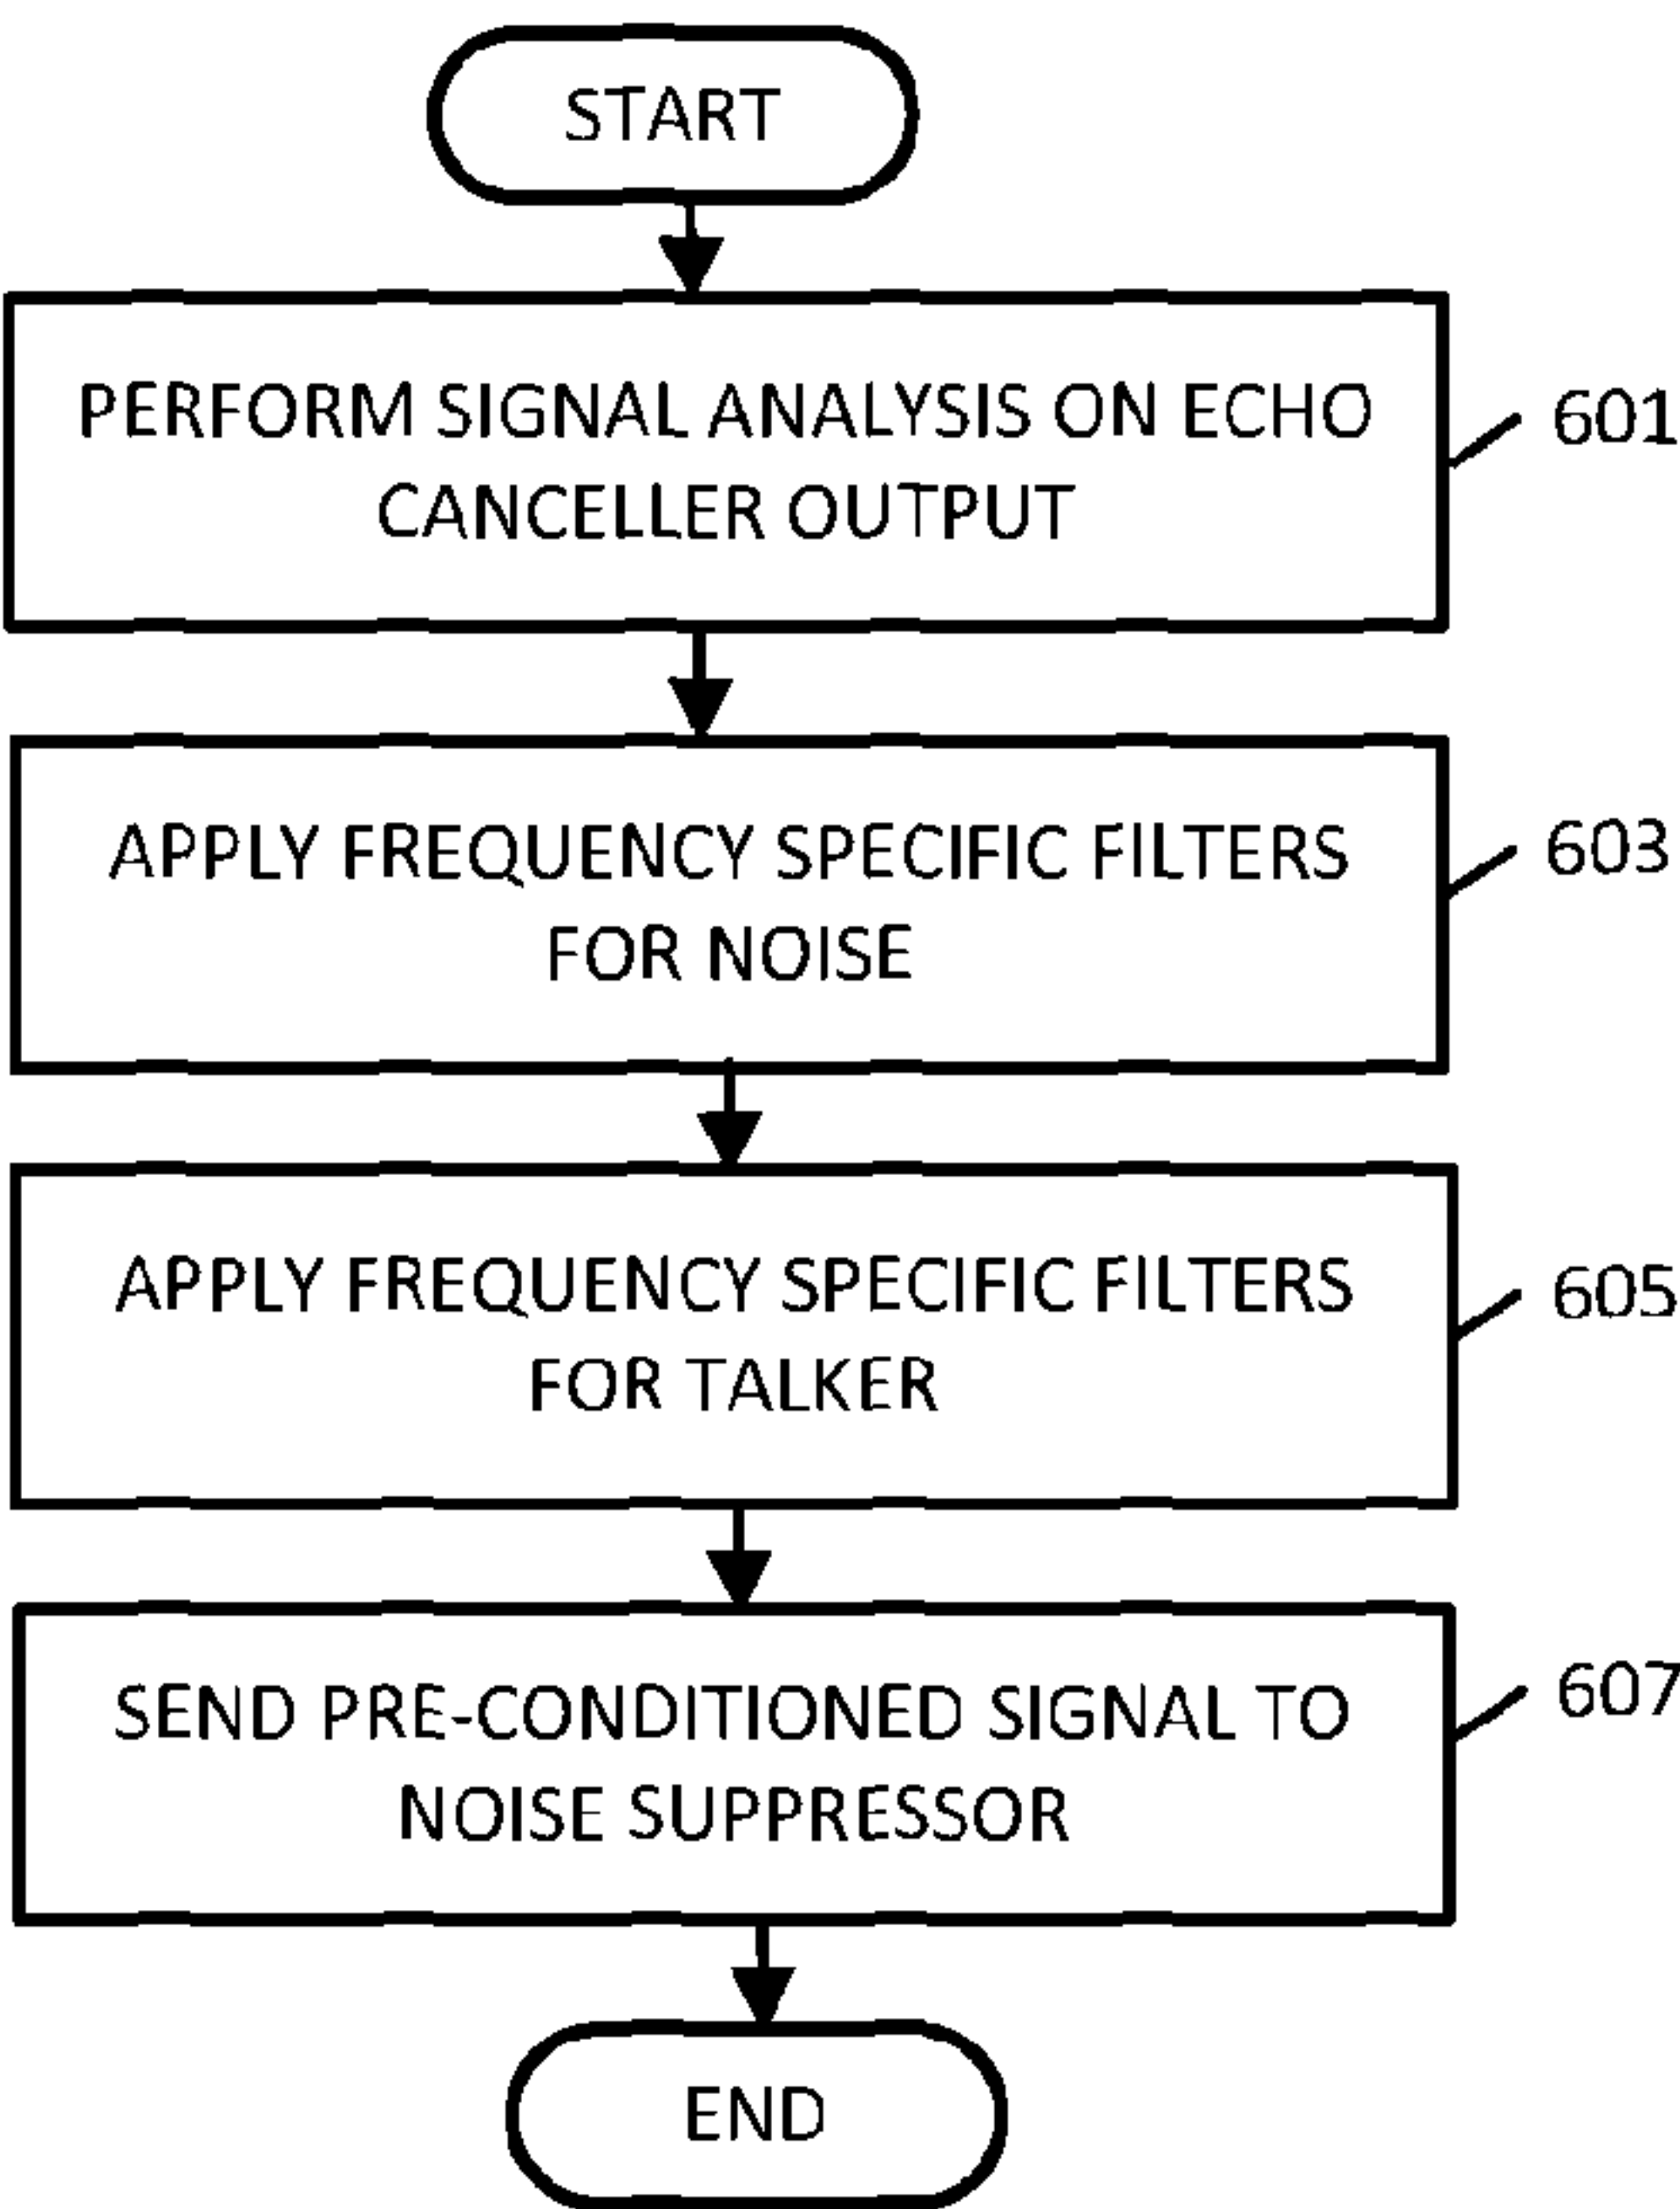


FIG. 6

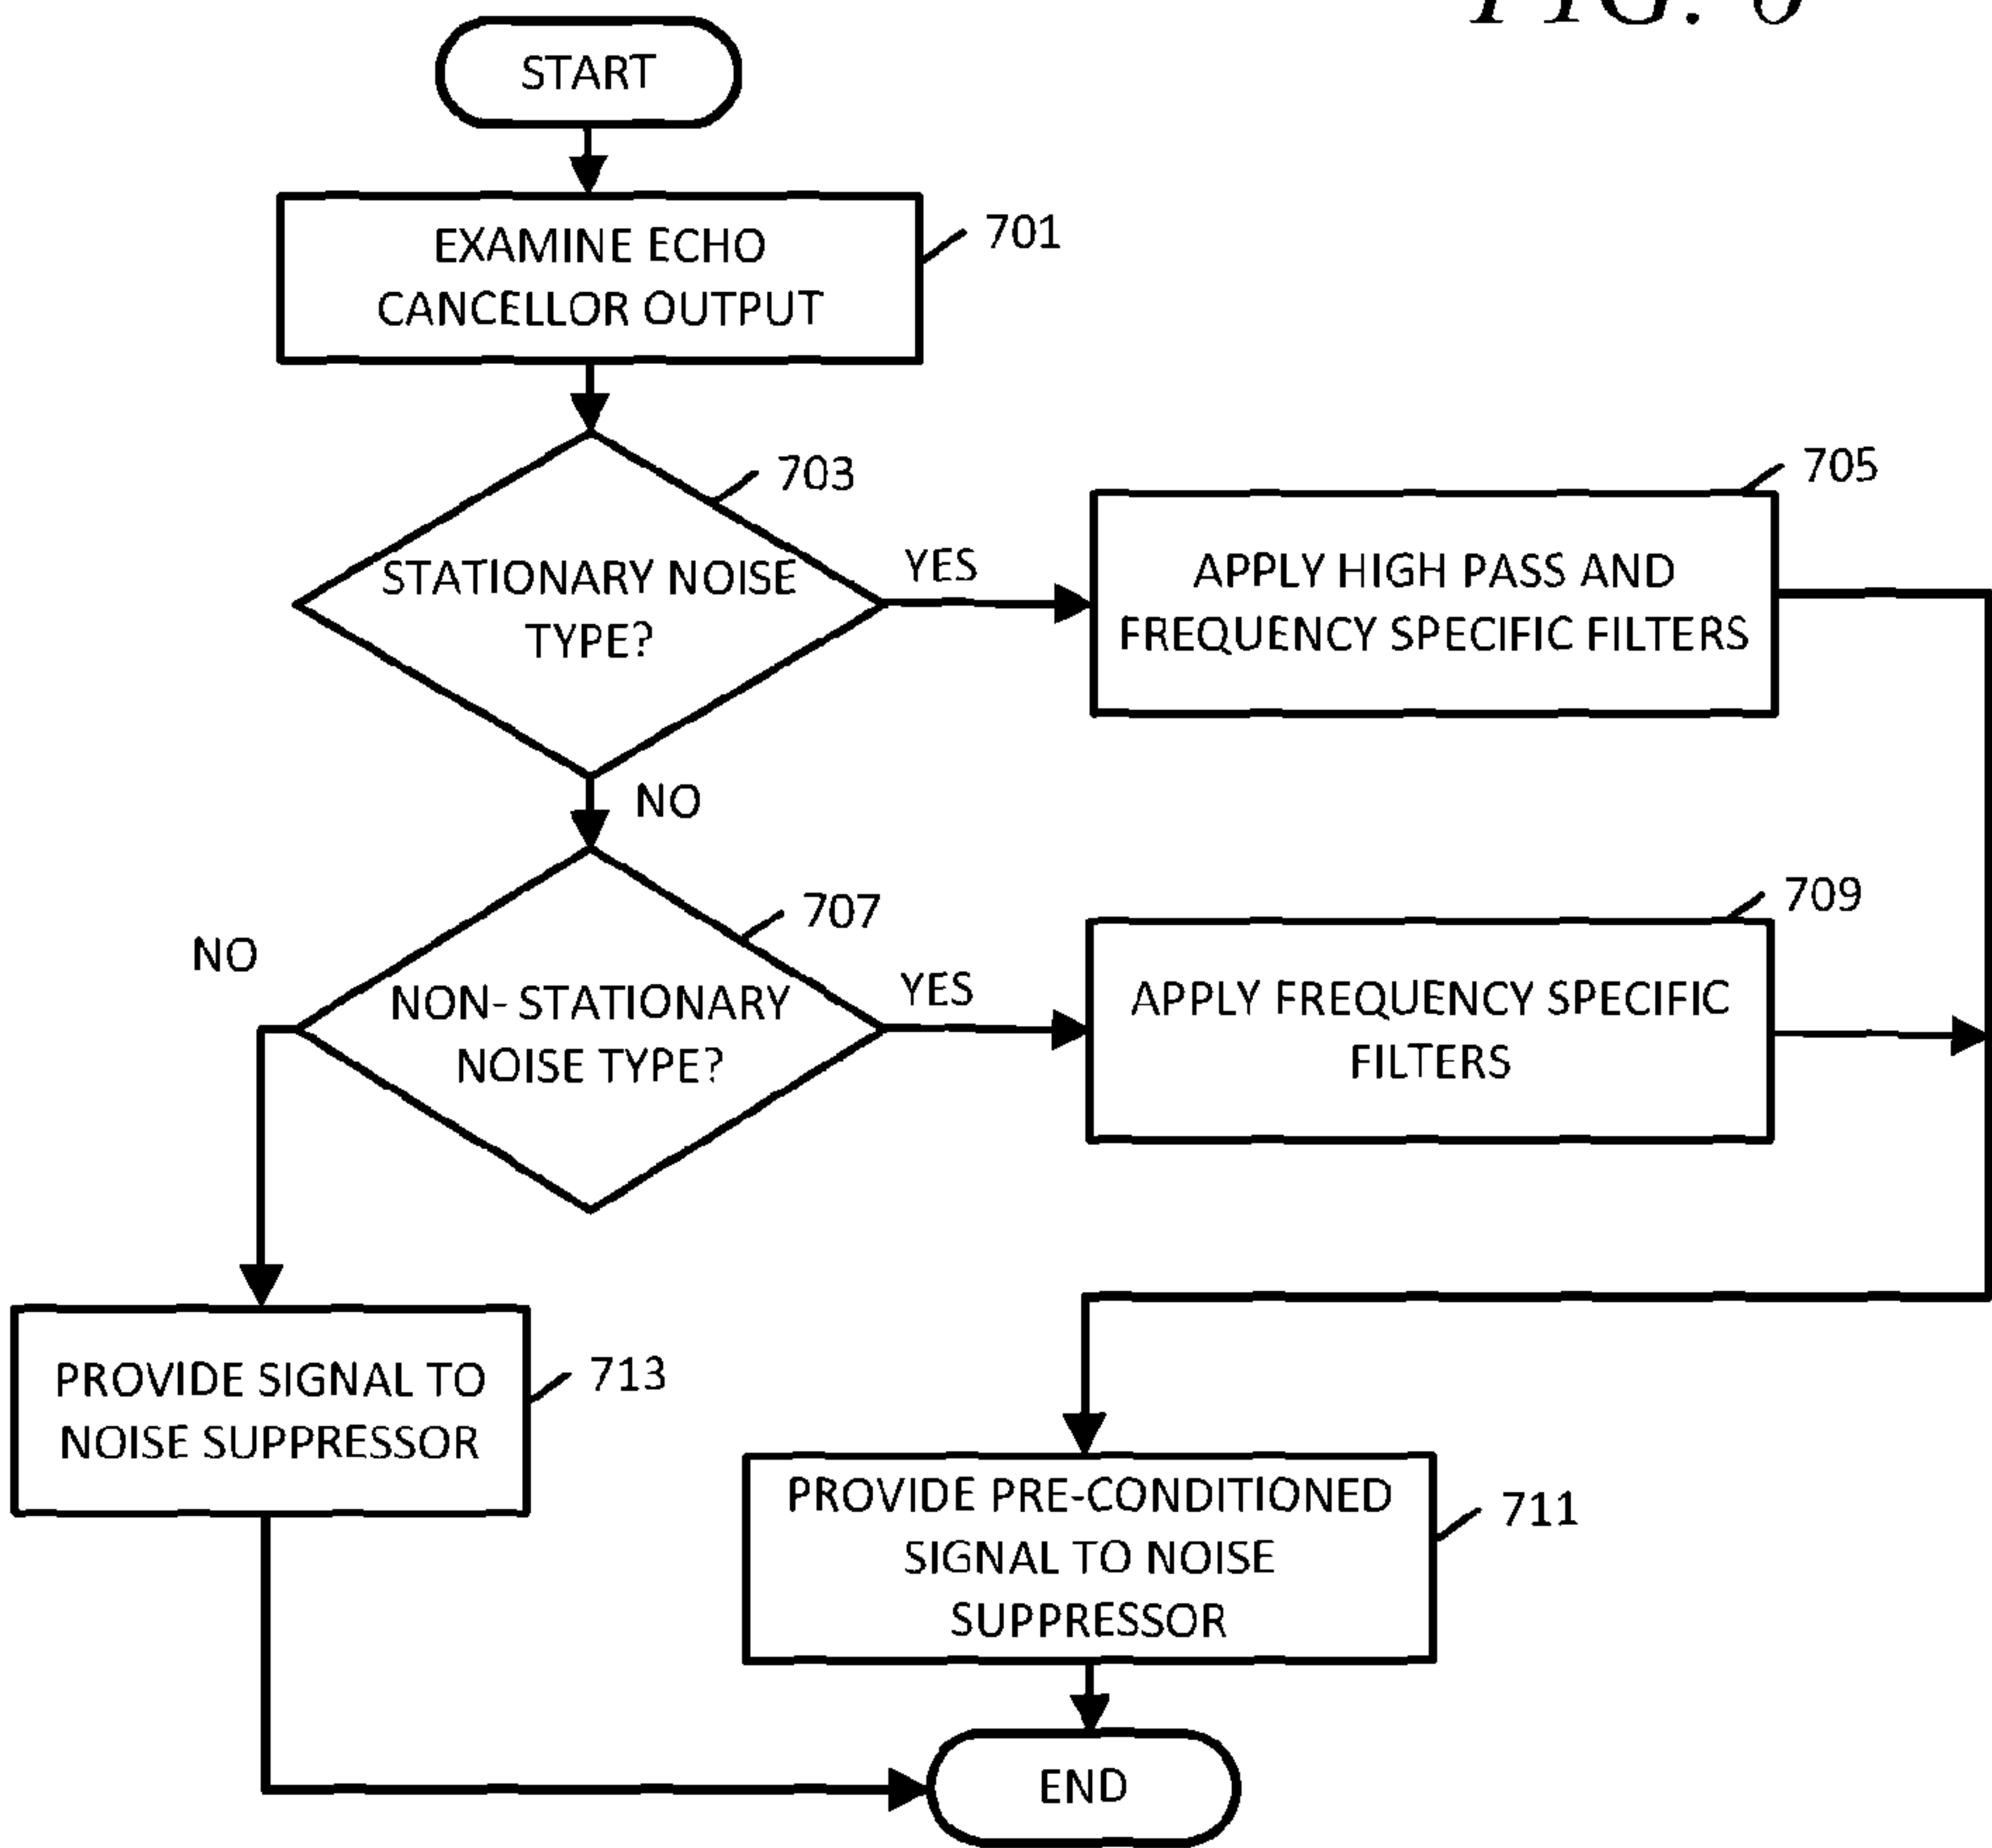


FIG. 7

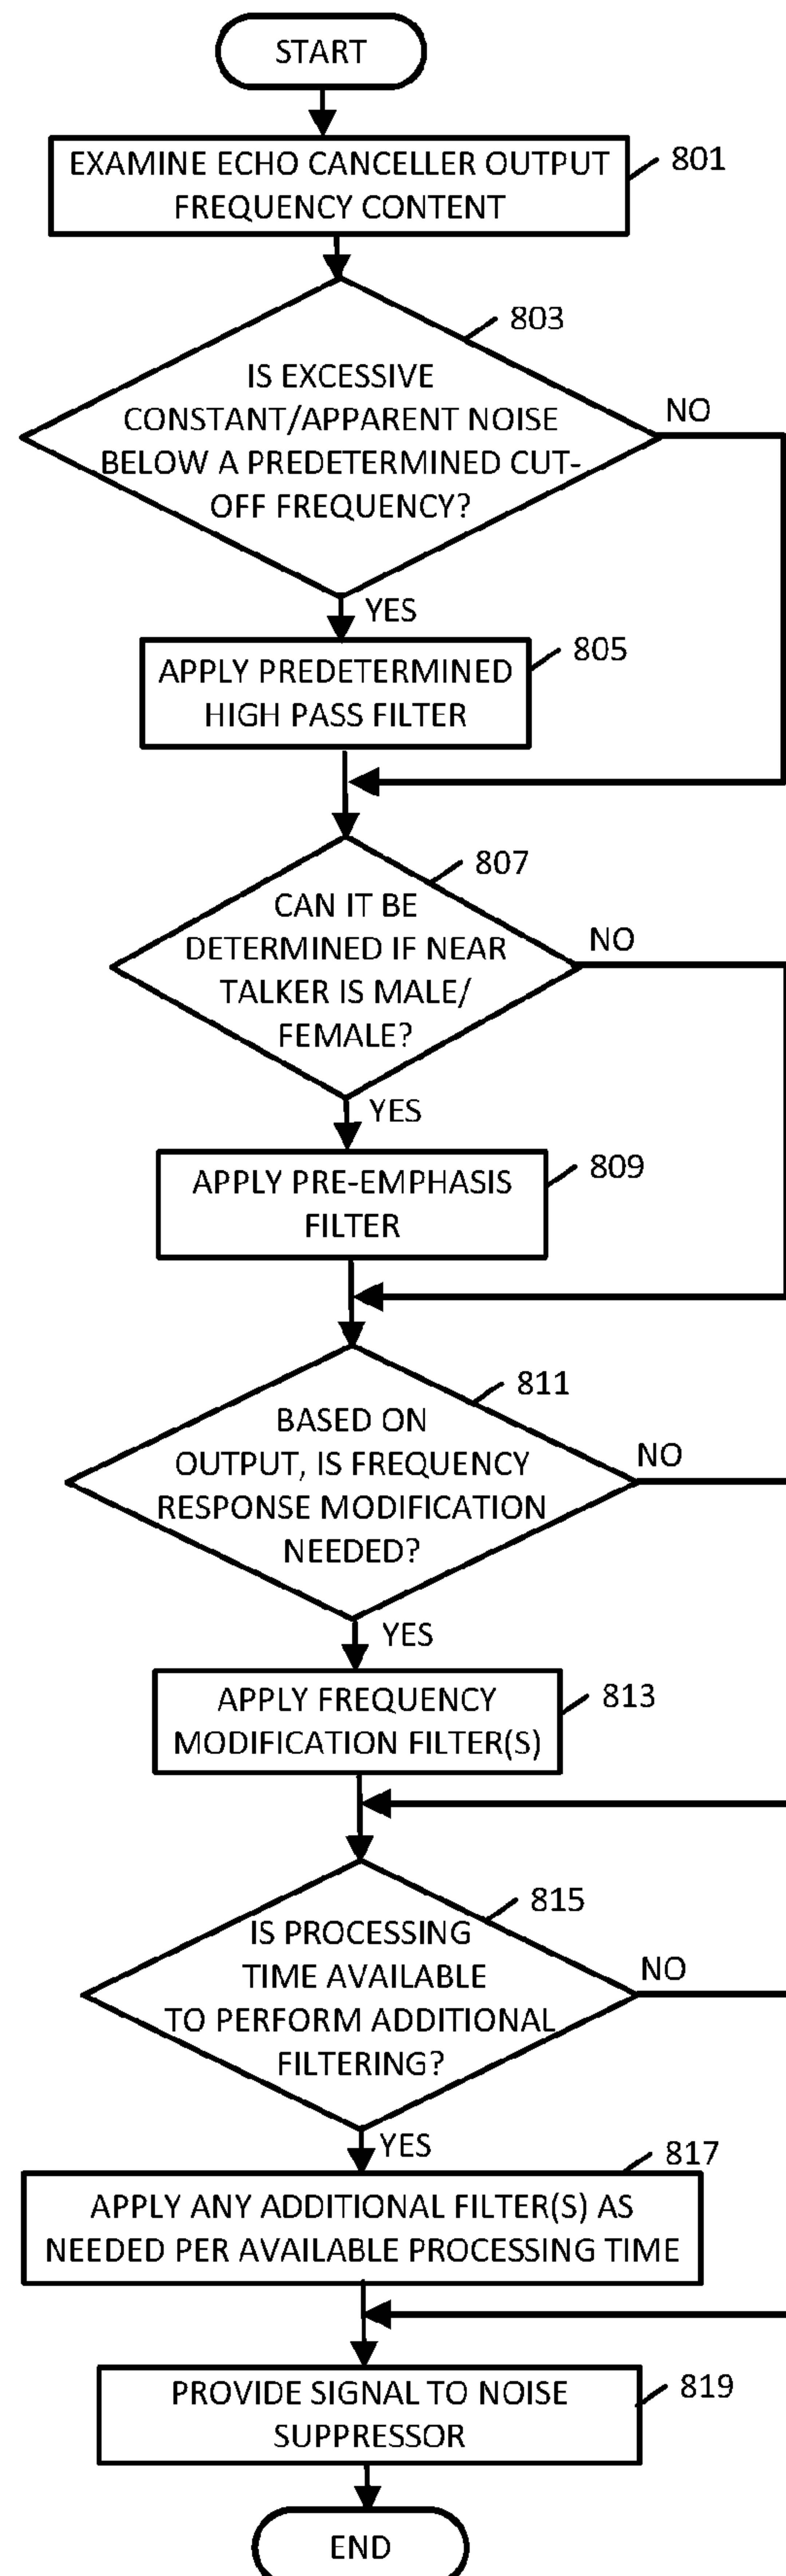


FIG. 8

1

APPARATUS WITH DYNAMIC AUDIO SIGNAL PRE-CONDITIONING AND METHODS THEREFOR

CROSS-REFERENCE TO RELATED APPLICATIONS

The present patent application claims priority to U.S. Provisional Patent Application No. 61/844,989, filed Jul. 11, 2013, entitled "APPARATUS WITH DYNAMIC AUDIO SIGNAL PRE-CONDITIONING AND METHODS THEREFOR," and further claims priority to U.S. Provisional Patent Application No. 61/798,097, filed Mar. 15, 2013, entitled "VOICE RECOGNITION FOR A MOBILE DEVICE," and further claims priority to U.S. Provisional Pat. App. No. 61/776,793, filed Mar. 12, 2013, entitled "VOICE RECOGNITION FOR A MOBILE DEVICE," all of which are assigned to the same assignee as the present patent application, and all of which are hereby incorporated by reference herein in their entirety.

FIELD OF THE DISCLOSURE

The present disclosure relates generally to audio processing and more particularly to methods and apparatuses for audio filtering and noise suppression in audio processing systems.

BACKGROUND

Communication devices such as, but not limited to, stationary telephones, cordless telephones, mobile phones, smart phones, tablets, laptops, etc., include, or may include, audio processing for voice communications, or to drive voice recognition systems to provide hands free voice control of the devices. Such communication devices employ mechanisms to cancel or reduce near field ambient noise in order to sustain a level of clarity during two-way voice (i.e. full duplex) communications. Most systems employ noise suppressors as one mechanism to stop, minimize or subtract unintended audio signals from contaminating desired speech signals during voice communications.

Most of such systems also utilize pre-conditioning processing which is applied prior to the application of more sophisticated noise suppression. For example, high pass filtering may help block or reduce wind noise or road noise. More generally, the pre-conditioning processing may include various filters or amplifiers that may be applied to one or more microphone signal outputs prior to noise suppression. This pre-conditioning however is fixed and treats all signals in the same manner. However, because input signal characteristics are dynamic and change with external conditions, including orientation of the device, the fixed pre-conditioning may not be appropriate for the given signal characteristics. Therefore, in some situations, the pre-conditioning may adversely impact subsequent noise suppression if the audio signal input to the noise suppression is inappropriately filtered or amplified.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic block diagram of an apparatus with dynamic audio signal pre-conditioning logic in accordance with the embodiments.

FIG. 2 is a schematic block diagram showing further details of an apparatus with dynamic audio signal pre-conditioning logic in accordance with the embodiments.

2

FIG. 3 is a schematic block diagram of filter logic that may be implemented in conjunction with the dynamic pre-conditioning logic shown in FIG. 2 in accordance with some embodiments.

FIG. 4 is a schematic block diagram showing further details of dynamic audio signal processing logic and a filter and gain selector in accordance with some embodiments.

FIG. 5 is a flow chart showing a method of operation of dynamic audio signal pre-conditioning in accordance with various embodiments.

FIG. 6 is a flow chart showing a method of operation of dynamic audio signal pre-conditioning in accordance with various embodiments.

FIG. 7 is a flow chart showing a method of operation of a dynamic audio signal pre-conditioning in accordance with various embodiments.

FIG. 8 is a flow chart showing a method of operation of dynamic audio signal pre-conditioning in accordance with various embodiments.

DETAILED DESCRIPTION

The disclosed embodiments provide a method that includes receiving an echo canceller audio signal output as a feedback signal, analyzing the feedback signal to obtain at least one characteristic, and pre-conditioning an audio signal, based on the at least one characteristic of the feedback signal, and providing a pre-conditioned audio signal as an echo canceller audio signal input. The method may include providing a pre-conditioned echo canceller audio signal output, based on the pre-conditioning audio signal, as a noise suppressor input, and performing noise suppression on the noise suppressor input. In some embodiments obtaining at least one characteristic includes obtaining at least one of a frequency characteristic or an amplitude characteristic of the feedback signal. In one embodiment, analyzing the feedback signal includes performing a Fast Fourier Transform (FFT) on the feedback signal.

In some embodiments, the method may include providing a noise suppressor output on a "send" path of a full duplex communication channel to a transceiver for transmission on the full duplex communication channel. The method may also include disabling fixed pre-conditioner filtering, prior to pre-conditioning the audio signal.

In some embodiments, the method may include determining if noise contained in the feedback signal is below a cutoff frequency as the at least one characteristic of the feedback signal and pre-conditioning the audio signal by applying a high pass filter. The method may also include determining if a near talker's voice contained in the feedback signal is within a given frequency range as the at least one characteristic of the feedback signal, and pre-conditioning the audio signal by applying a pre-emphasis filter to emphasize the given frequency range. For example, a male or female voice may have a frequency within a given frequency range which, if determined by the method, can be emphasized with an appropriate pre-determined filter.

The method may also include determining if frequency response modification is needed based on the feedback signal as the at least one characteristic of the feedback signal, and pre-conditioning the audio signal by applying a frequency modification filter. In some embodiments the method may include determining processing time available to perform filtering of the audio signal, and selecting audio signal filters based on the processing time available.

The present disclosure also provides an apparatus that is operative to perform the various disclosed methods. In one

3

embodiment, an apparatus includes an echo canceller having an audio signal input and an audio signal output, and dynamic pre-conditioning logic, operatively coupled to the echo canceller audio signal output as a feedback signal and having a dynamic pre-conditioning logic output operatively coupled to the echo canceller audio signal input. The dynamic pre-conditioning logic is also operative to receive an audio signal input from at least one microphone.

The dynamic pre-conditioning logic is operative to analyze the feedback signal to obtain at least one characteristic, and pre-condition the audio signal input, based on the at least one characteristic of the feedback signal, and provide a pre-conditioned audio signal at the echo canceller audio signal input. The apparatus may further include a noise suppressor, having a noise suppressor input operatively coupled to the echo canceller audio signal output and having a noise suppressor output.

In some embodiments, the dynamic pre-conditioning logic may include configurable filter logic, at least one amplifier, and a filter and gain selector, operatively coupled to the configurable filter logic and to the at least one amplifier. The filter and gain selector is also operatively coupled to the echo canceller audio signal output to receive the feedback signal, and is operative to obtain at least one characteristic by obtaining at least one of a frequency characteristic or an amplitude characteristic of the feedback signal.

In some embodiments, the filter and gain selector may be operative to analyze the feedback signal by performing frequency domain analysis on the feedback signal such as, but not limited to, an FFT. In some embodiments, the configurable filter logic may be configurable to provide at least one of a high pass filter, a band pass filter or a pre-emphasis filter to emphasize the given frequency range.

In some embodiments, the apparatus may include a fixed pre-conditioner including fixed filter logic, operatively coupled to at least one microphone, and operatively coupled to the dynamic pre-conditioning logic to provide the audio signal input from the at least one microphone. The fixed pre-conditioner may have an enable and disable input to enable or disable the fixed filter logic.

Another disclosed method of operation includes receiving an echo canceller audio signal output as a feedback signal, analyzing the feedback signal to obtain at least one characteristic, selecting at least one filter from a plurality of selectable filters, based on the at least one characteristic, applying the at least one filter to filter an audio signal and obtain a filtered audio signal and providing the filtered audio signal as an echo canceller audio signal input.

In some embodiments, the method may include performing a table lookup to obtain filter coefficients for the at least one filter where the table lookup is based on the at least one characteristic. The method may then include applying the at least one filter using the filter coefficients to filter the audio signal and obtain the filtered audio signal. The method may analyze the feedback signal to obtain at least one characteristic by performing frequency domain analysis on the feedback signal.

Turning now to the drawings, FIG. 1 is a schematic block diagram of an apparatus 100 with dynamic pre-conditioning logic 200 in accordance with the embodiments. In accordance with the embodiments, the apparatus 100 may be any of various communication devices such as, but not limited to, a stationary telephone, cordless telephone, mobile phone, smart phone, tablet, laptop, etc., that may include, audio processing for voice communications, or to drive voice recognition systems to provide hands free voice control of the device. For example, the apparatus 100 may include voice

4

command recognition logic 160 which provides a control signal 111 to a system control 170. The system control 170 may be any suitable system control and may control features or functions of the apparatus 100 or may control features or functions of one or more software or firmware applications that run on the apparatus 100, etc.

The apparatus 100 includes fixed pre-conditioning logic 120, which is operatively coupled to one or more microphones 110 and to a speaker 112. The fixed preconditioning logic 120 may include analog-to-digital converters (ADC), digital-to-analog converters (DAC), fixed predetermined audio filters and fixed predetermined amplifiers having predetermined gain levels based on assumptions made about the audio signals received by the one or more microphones 110. The fixed pre-conditioning logic 120 is operatively coupled along a send path of a full duplex communication channel, to provide at least one audio output signal 101 to the dynamic pre-conditioning logic 200. The dynamic pre-conditioning logic 200 is operatively coupled to an echo canceller 130 to provide a pre-conditioned audio signal as an echo canceller audio signal input 103. The dynamic pre-conditioning logic 200 is also operatively coupled to the echo canceller 130 to receive the echo canceller audio signal output 105 as a feedback signal 107. The echo canceller 130 is operatively coupled to a noise suppressor 140 and provides the echo canceller audio signal output 105 as a noise suppressor input. The noise suppressor 140, in turn, is operatively coupled to a transceiver 150 to provide a noise suppressor audio signal output 109 as a transceiver 150 for the full duplex communication channel send path. It is to be understood that other intervening post processing logic components may exist between the noise suppressor 140 and the transceiver 150 such as gain, more filtering, etc., however such components are not shown for the purpose of clarity. The transceiver 150 may be a wireline transceiver or may be a wireless transceiver in accordance with the various embodiments. The transceiver 150 may also operate in a Voice Over Internet Protocol (VoIP) system in some embodiments and may provide IP packet voice over a wireline or wireless VoIP connection.

The noise suppressor 140 may also be operatively coupled to the voice command recognition logic 160. As mentioned above, the voice command recognition logic 160 is operatively coupled to the system control 170, and provides a control signal 111 to control various functions or features of the apparatus 100 or to control functions and features of applications running on the apparatus 100 as appropriate. The full duplex communication channel also includes a receive path which begins with received voice, which is provided to the echo canceller 130 from the transceiver 150 as received audio signal 113. It is to be understood that some signal processing logic components may also be present between the transceiver 150 and the echo canceller 130, however such components are now shown for the purpose of clarity. The echo canceller 130 monitors the received voice and makes adjustments prior to sending an echo canceller audio output signal 115 to the fixed pre-conditioning logic 120. The fixed preconditioning logic 120 further provides an audio signal through a DAC to the speaker 112.

The apparatus 100 send path of the full duplex communication channel includes the audio signal 101 from the fixed pre-conditioning logic 120 which is processed by the dynamic pre-conditioning logic 200 to provide the pre-conditioned audio signal to the echo canceller 130. The send path continues with the echo canceller audio signal output 105 which is provided to the noise suppressor 140, and the noise suppressor output audio signal 109 which is provided to the transceiver 150 for transmission on the full duplex commu-

5

nication channel. The apparatus **100** receive path of the full duplex communication channel includes the received voice, which is provided to the echo canceller **130** from transceiver **150** as received audio signal **113**, and includes the echo canceller audio output signal **115** which is provided to the fixed preconditioning logic **120** for provision of audio to the speaker **112**.

Therefore, in the example of FIG. **1**, the apparatus **100** is operative to implement a full duplex communication channel for two-way voice communication. One or more microphones **110** receive audio, such as the user's voice, for transmission on the "send" path of the full duplex communication channel, and the speaker **112** provides sound received on the "receive" path of the full duplex communication channel for two-way telephonic voice communications. Because sound emanating from the speaker **112** may be received by the one or more microphones **110** and create interference and echoes between the send and receive paths, an echo canceller **130** is employed. The echo canceller **130** operates to monitor audio on the send path, determine if any part of the send path audio shows up on the receive path, and reduce or block undesirable audio from the send path accordingly. Noise suppression is also applied to the echo canceller audio signal output **105** by the noise suppressor **140** to further reduce effects caused by stationary or non-stationary noise sources that may contaminate the voice signal. The noise suppressor **140** provides noise suppressor audio output **109** to the transceiver **150** for transmission of full duplex communication channel.

Any of the predetermined filtering or predetermined gain imposed by corresponding filters and amplifiers within the fixed pre-conditioning logic **120** is based on assumptions made about characteristics of the voice signal received by the one or more microphones **110**. In other words, the fixed pre-conditioning logic **120** treats all audio signals in the same way. Because of these assumptions, inappropriate filtering or gain may be applied for certain types of audio signals having certain types of noise characteristics that deviate from the assumed characteristics. Further, because of possible inappropriate filtering or application of inappropriate gain, the echo canceller **130** and the noise suppressor **140** may not operate under optimum conditions due to an erroneous input signal received from the fixed pre-conditioning logic **120**.

Therefore in accordance with the embodiments, the dynamic pre-conditioning logic **200** monitors the audio signal **101** received from the one or more microphones **110** and, based on signal analysis, makes decisions regarding appropriate pre-conditioning filtering or pre-conditioning amplification gain for the specific audio signal accordingly. This dynamic pre-conditioning results in better noise suppression by the noise suppressor **140**. That is, the echo canceller audio signal output **105**, which is provided as an input to noise suppressor **140**, will be more realistic because it is pre-conditioned based on at least one characteristic of the audio signal **101** detected by the dynamic pre-conditioning logic **200**. The dynamic pre-conditioning logic **200** monitors the echo canceller audio signal output **105** as feedback signal **107** and analyzes it to obtain at least one characteristic of the feedback signal **107**. Based on this analysis, and on the at least one characteristic, the dynamic pre-conditioning logic **200** makes decisions regarding application of filtering or gain.

In some embodiments, the fixed preconditioning **120** can be disabled such that any pre-conditioning on the send path is only performed by the dynamic pre-conditioning logic **200**. The dynamic pre-conditioning logic **200** is "dynamic" because it monitors the audio signal **101** and adjusts the audio signal **101** as environmental or other noise causing conditions (such as, but not limited to, apparatus **100** orientation etc.)

6

create changes in the audio signal **101**. Put another way, the dynamic pre-conditioning logic **200** applies appropriate filtering and/or gain to accommodate such changing audio environment conditions.

FIG. **2** is a schematic block diagram of an example apparatus **300** and shows further details of dynamic pre-conditioning logic **200** in accordance with the embodiments. Similar to the apparatus **100** illustrated in FIG. **1**, the apparatus **300** may be any of various communication devices such as, but not limited to, a stationary telephone, cordless telephone, mobile phone, smart phone, tablet, laptop, etc., that may include, audio processing for voice communications, or to drive voice recognition systems to provide hands free voice control of the device.

In the example apparatus **300** shown in FIG. **2**, a fixed pre-conditioning unit **220** includes fixed pre-conditioning logic along with microphone configuration logic **225**. The fixed preconditioning unit **220** may be a commercially available hardware codec and/or may be implemented as a programmable processor, an ASIC, a DSP, an FPGA, or in some other suitable manner, etc. The microphone configuration logic **225** is operatively coupled to the group of microphones **210** to receive audio signal inputs and is operatively coupled to send path fixed pre-conditioning logic **223**. The microphone configuration logic **225** includes a microphone on-off control input that may receive a control signal **229** to turn one or more of the microphones on or off under certain conditions. For example, an application processor **227** may be operatively coupled to the fixed pre-conditioning unit **220** and may be operative to run various applications **185** from system memory **180**. Any of the various applications **185** may be operative to send the control signal **229** to the microphone configuration logic **225** and configure the group of microphones **210** as needed by the application such as, for example, for speakerphone operation, handheld operation, etc., or for some other purpose. Likewise the application processor **227** may send the control signal **231** to the enable/disable input of the fixed preconditioning logic to enable or disable it under certain conditions. Alternatively, in the various embodiments, the fixed pre-conditioning logic may be disabled such that the dynamic pre-conditioning logic **200** may replace it completely. The dynamic pre-conditioning logic **200** may include filter and gain selector **201** which may also be operative to send control signal **229** and/or control signal **231** to the fixed pre-conditioning unit **220**.

In accordance with the embodiments, fixed pre-conditioning logic **223** for the send path is operatively coupled to the dynamic pre-conditioning logic **200** and provides an audio signal **101**. The dynamic pre-conditioning logic **200** is operatively coupled to the echo canceller **130** to provide a pre-conditioned audio signal as echo canceller audio signal input **103**, and to receive an echo canceller audio signal output **105** as a feedback signal **107**. The echo canceller **130** is operatively coupled to a buffer **131** to provide an echo canceller audio signal output **105** to the buffer **131**. The echo canceller **130** is also operatively coupled to the transceiver **150** to obtain a received audio signal **113**, and is operatively coupled to fixed pre-conditioning logic **221** for the receive path to provide an echo canceller audio signal output signal **115**. The fixed pre-conditioning logic **221** for the receive path is operatively coupled to the speaker **212** to provide the output audio signal. The transceiver **150** may be a wireline transceiver or may be a wireless transceiver, or a VoIP component, in accordance with the various embodiments as mentioned previously above.

The apparatus **300** also includes a noise suppressor **140** which is operatively coupled to the buffer **131** to receive the

buffer audio output signal **106** and to provide a noise suppressor audio signal output **109** to the transceiver **150** for transmission on the full-duplex communication channel. The noise suppressor audio signal output **109** may also be provided to voice command recognition logic **160**. The voice command recognition logic **160** is operatively coupled to the system control **170** to provide the control signal **161**.

In accordance with some embodiments, the dynamic pre-conditioning logic **200**, echo canceller **130**, buffer **131** and noise suppressor **140** may be implemented in an integrated manner, for example, in a single signal processing unit **230**. The signal processing unit **230** may be implemented on a programmable processor, ASIC, DSP, FPGA or in some other appropriate manner. The signal processing unit **230** may also be considered to be a type of apparatus in accordance with some embodiments in that the signal processing unit **230** may be included in various other apparatuses, such as apparatus **300**, to provide the advantages, features and functions described herein.

The apparatus **300** may also include a system memory **180** which is a non-volatile, non-transitory memory. The system memory **180** may store a lookup table **181**, a table of noise suppression algorithms **183**, one or more applications **185** and a table of echo canceller algorithms **187**. The application processor **227** is operatively coupled to the system memory **180** by read/write interface **228** and may access and execute any of the various one or more applications **185**. The system memory **180** is also operatively coupled to the noise suppressor **140** and the echo canceller **130**. In some embodiments, the echo canceller **130** may access the system memory **180** over read/write interface **189** to access the echo canceller algorithms **187**. Similarly the noise suppressor **140** may access the system memory over read/write interface **141** to access and execute noise suppression algorithms **183**. In some embodiments, the signal processing unit **230** may have its own integrated memory, in addition to system memory **180**, and may store the lookup table **181**, noise suppression algorithms **183** or the echo canceller algorithms **187** independently and independent from the system memory **180**.

In some embodiments, the dynamic pre-conditioning logic **200** includes configurable filter logic **203**, amplifier or gain **205** and a filter and gain selector **201**. The filter and gain selector **201** is operatively coupled to the configurable filter logic **203** and to the adjustable gain **205** and provides respective control signal **209** and control signal **211**. The filter and gain selector **201** is also operatively coupled to the echo canceller **130** and receives the feedback signal **107**. The filter and gain selector **201** is also operatively coupled to system memory **180** and is operative to access a lookup table **181** which contains sets of filter coefficients that may be used to configure one or more filters of the configurable filter logic **203**. The audio signal **101** which is received by the dynamic pre-conditioning logic **200** is initially passed through to the echo canceller **130** as audio signal **103** which is processed by the echo canceller **130**. The feedback signal **107** is then provided to the filter and gain selector **201** which performs analysis of the feedback signal **107**.

The filter and gain selector **201** is operatively coupled to a buffer **131** and sends a control signal **233** to control the buffer **131** to begin buffering the echo canceller audio signal output **105**. The purpose of the buffer **131** is to delay the audio signal (i.e. buffer audio output signal **106**) provided to the noise suppressor **140** in order to provide time for the dynamic pre-conditioning logic **200** to make adjustments. The buffer **131** buffers the echo canceller audio signal output **105** in response to the control signal **233** from the filter and gain selector **201**. That is, the filter and gain selector **201** controls

the buffer **131** to buffer the echo canceller audio signal output **105** to provide a time delay such that the filter and gain selector **201** may dynamically adjust the echo canceller audio signal output **105** using configurable filter logic **203** and adjustable gain **205** prior to applying the noise suppressor **140**. Therefore, under some audio environment conditions, if the filter gain and selector logic **201** determines that no filtering or gain adjustment to the audio signal is required, the buffer **131** may proceed to send the buffer audio output signal **106** to the noise suppressor **140**.

However, if audio filtering is required, the filter and gain selector **201** may send control signal **233** to the buffer **131** to clear the buffer and to pass through (without buffering) the echo canceller audio signal output **105** (after application of pre-conditioning filters or gain) to the noise suppressor **140**. Put another way, the buffer **131** is operative to either buffer the echo canceller audio signal output **105** or may pass through the signal with no buffering (i.e. with no added buffering delay) after pre-conditioning has been applied.

The pre-conditioning applied is based on analysis of the feedback signal **107**. That is, the filter and gain selector **201** analyzes the feedback signal **107** and determines at least one characteristic of the feedback signal **107**. Based on the characteristic, the filter and gain selector **201** accesses the lookup table **181** over read/write interface **207** and selects a set of filter coefficients for one or more filters corresponding to the characteristics observed in the feedback signal **107**. The observed characteristics may include voice or noise information obtained from the echo canceller **130** output as the feedback signal **107** such as, but not limited to energy, spectral content, phonetic content, frequency range, noise type, noise level, amplitude, etc. that may be used in the decision making process. The filter and gain selector **201** also determines what if any filters of the configurable filter logic **203** will be applied to the audio signal **101** based on the observed characteristic.

Turning to FIG. 3, details of one example of the configurable filter logic **203** are provided. The configurable filter logic **203** receives the audio signal **101** from the fixed pre-conditioning logic **223** for the send path. Based on the control signal **209** received from the filter and gain selector **201**, one or more of the various filters (filter 1 through filter “N”) will be turned on by controlling appropriate filter bypass switch logic (filter 1 bypass through filter “N” bypass). The filter bypass switch logic may be implemented in any appropriate manners including, but not limited to, using tri-state logic, or some other appropriate logic or software or firmware, etc. By selecting appropriate filter bypass switch logic a sequential series of filters may be configured. Each filter of filter 1 through filter N is a predetermined filter that has predetermined characteristics such as, but not limited to, a high pass filter characteristic, a bandpass filter characteristic, frequency pre-emphasis, or some other predetermined filter characteristic that may be selected and applied to the audio signal **101** as deemed necessary. Some filters may be adjusted by control signal **209** by changing filter coefficients where the filter coefficients are selected from the lookup table **181** stored in system memory **180**.

Therefore the configurable filter logic **203** may consist of a plurality of filters such as filter 1 through filter N which are selectable to configure a series of filters. Further, the individual filters are configurable by adjusting the filter’s coefficients. The configurable filter logic **203** is operatively coupled to the adjustable gain **205** (i.e. amplification). The adjustable gain **205** also has gain bypass switch logic that is controllable by control signal **211** to bypass the gain **205**. The pre-conditioned audio signal is thus provided as an echo canceller audio signal input **103** as shown. The control signal **211** also con-

trols the gain level of adjustable gain **205**. The control signal **209** from the filter and gain selector **201** therefore can switch any of the filters on or off by controlling the appropriate filter bypass switch logic. In one example, filter 1 and filter 3 may be configured to operate in series while filter 2 and filter 4 through filter “N” are turned off (i.e. bypassed) in accordance with the control signal **209**. If the adjustable gain **205** is switched on (i.e. not bypassed), then the control signal **211** may control the gain **205** to provide the appropriate level of gain.

In one example, an FFT may be performed and the results may have one or more characteristics that match known characteristics in the lookup table **181** that indicate the presence of stationary noise. In this situation, the configurable filter logic **203** may be configured to provide high pass and frequency specific filters. If the FFT results have one or more characteristics that match known characteristics in the lookup table **181** that indicate the presence of non-stationary noise, then frequency specific filters may be applied. For example, filters that emphasize the frequency spectrum in the 1 KHz to 2 KHz range may be applied. In some embodiments, the filter and gain selector **201** may also determine the type of echo cancellation that is being applied and make adjustments based on the specific type of echo cancellation.

Returning to FIG. 2, the filter and gain selector **201** is therefore operative to send a control signal **209** to the configurable filter logic **203** to configure a series of filters as appropriate for the audio signal **101**, based on analysis of the feedback signal **107**. The filter and gain selector **201** is also operative to send the control signal **211** to the adjustable gain **205** to provide an appropriate level of gain adjustment. The dynamic pre-conditioning logic **200** then provides the pre-conditioned audio signal as an echo canceller audio signal input **103** to the echo canceller **130**. At that point, the buffer **131** may provide the buffer audio output signal **106** to the noise suppressor **140**.

The noise suppressor **140** may access the system memory **180** over read/write interface **141** and select an appropriate noise suppression algorithm from the noise suppression algorithms **183**. The noise suppressor audio signal output **109** is provided to the transceiver **150** for transmission on the full-duplex communication channel.

In some embodiments, the filter and gain selector **201** is operative to send the control signal **231** to enable or disable the send path fixed pre-conditioning logic **223** and may also be operative to send control signal **229** to the microphone configuration logic **225** to turn microphones on or off. In other embodiments, the send path fixed pre-conditioning logic **223** may continue to operate in conjunction with the dynamic pre-conditioning logic **200**. In this scenario, the dynamic pre-conditioning logic **200** may operate together with the fixed pre-conditioning logic **223** or may be operative to disable all, or portions, of the fixed pre-conditioning logic as needed.

On a receive path of the apparatus **300**, the transceiver **150** provides received voice as received audio signal **113** to the echo canceller **130**, which in turn provides the echo canceller audio output signal **115** to the receive path fixed pre-conditioning logic **221** for further provision to the speaker **212**.

FIG. 4 provides further example details of the dynamic pre-conditioning logic **200** and the filter and gain selector **201**. As shown in FIG. 4, the filter and gain selector **201** may include a signal analysis logic **202** which is operatively coupled to a table lookup generator **204**. The signal analysis logic **202** receives the feedback signal **107** from the echo canceller **130** and performs signal analysis such as, but not limited to, frequency domain analysis and level analysis. In

one example embodiment, the signal analysis logic **202** includes an FFT block with x number of points and operating at 8 KHz or 16 KHz and that performs frequency domain analysis on the feedback signal **107**. The signal analysis logic **202** obtains at least one characteristic observed from the feedback signal **107** such as an observed frequency range, signal amplitude (level), and may also use an observed frequency spectral characteristic to discern noise contained in the signal. For example, the signal analysis **202** may determine that stationary or non-stationary type noise is contaminating the audio signal. Based on the analysis and at least one characteristic of the feedback signal **107** obtained from the analysis, the signal analysis logic **202** sends control signal **208** to the table lookup generator **204**. In response to receiving the control signal **208**, which includes information regarding at least one characteristic of the feedback signal **107**, the table lookup generator **204** accesses the system memory **180**, over the read/write interface **207**, and accesses the lookup table **181** to determine appropriate filter coefficients. The table lookup generator then provides the control signal **209** to the configurable filter logic **203** to select and configure one or more filters.

The signal analysis logic **202** therefore, in some embodiments, may include an FFT (or another frequency domain analysis or some other analysis logic) and level analysis logic which determines whether filtering and/or gain needs to be applied. Based on level analysis the signal analysis logic **202** may provide the control signal **211** to the adjustable gain **205** to adjust the gain/amplification level accordingly. The signal analysis logic **202** also provides the control signal **233** to the buffer **131** to control the buffer **131** to begin buffering the echo canceller audio signal output **105** so that, if no pre-conditioning is required, the buffer audio output signal **106** may be provided to the noise suppressor **140**.

The operation of the dynamic pre-conditioning logic **200** may be driven by a clock **235** which may receive input from a system clock (not shown) of the apparatus **300** in some embodiments. All components of the dynamic pre-conditioning logic **200** are operatively coupled to the clock **235** however these inputs are not shown for clarity. The dynamic pre-conditioning logic **200** includes buffer **102** which buffers audio frames according to a clock signal from clock **235**. The audio frames are received as the audio signal **101** which is provided by one or more ADCs of the fixed pre-conditioning unit **220**. For each audio frame, switch logic **236** is closed, in accordance with the clock signal from clock **235**, for a length of time long enough to pass the audio frame to the echo canceller **130** so that the echo canceller may initially process the audio frame. Buffer **131** shown in FIG. 2 will buffer the echo canceller audio signal output **105** for a period of time long enough for the dynamic pre-conditioning logic **200** to either determine that no pre-conditioning is needed, or to determine that pre-conditioning is needed and apply filtering and/or gain accordingly. The buffer **102** delays the audio frame for a period of time long enough for the echo canceller **130** to process the audio frame, and provide the feedback signal to the signal analysis logic **202**. The buffer **102** also provides time for the signal analysis logic **202** to perform frequency domain (such as FFT) and level analysis, and for the table look-up generator **204** to obtain filter coefficients from lookup table **181** and configure the configurable filter logic **203**. The buffer **102** then passes the audio frame to the filter logic **203** and subsequent adjustable gain **205** which is applied if needed. The pre-conditioned audio signal is then provided as echo canceller audio signal input **103** to the echo canceller **130**. The signal analysis logic **202** may also send control signal **233** to buffer **131** to clear the buffer **131** and to

11

control the buffer 131 to pass through the adjusted audio frame from the echo canceller 130 to the noise suppressor 140. In other words, an optimized audio signal is provided to the noise suppressor 140.

Because the allowable processing time on the send path determines the number of filter stages that may be applied to the audio signal, in some embodiments, the filter and gain selector 201 determines the allowable number of filters, from the configurable filter logic 203, that can be applied while still maintaining an allotted processing time. That is, if the processing time is not sufficient for all filtering that would be useful to apply to the audio frame, the filter and gain selector 201 will prioritize the applied filters and apply only those that have the most impact on audio signal improvement. For example, noise filtering may be prioritized over emphasis filters or vice versa. Also, the filter and gain selector 201 may apply additional filters to “fill-up” any available processing time if such additional filters would further improve the audio signal.

The flowchart of FIG. 5 illustrates one method of operation in accordance with the embodiments. In operation block 501, an apparatus performs signal analysis on an echo canceller output. In operation block 503 the apparatus applies filters and/or gain based on the signal analysis. In operation block 505, the apparatus sends the pre-conditioned audio signal to a noise suppressor. The method of operation then ends.

The flowchart of FIG. 6 illustrates another method of operation. The method of operation begins in operation block 601, and the dynamic pre-conditioning logic 200 performs signal analysis on the echo canceller 130 output. In operation block 603, the dynamic pre-conditioning logic 200 applies frequency specific filters for noise as determined by the filter and gain selector 201. In operation block 605, the dynamic pre-conditioning logic 200 applies frequency specific filters to filter a talker’s voice and, in operation block 607, the dynamic pre-conditioning logic 200 sends a preconditioned audio signal to the noise suppressor 140. The method of operation then ends.

FIG. 7 illustrates another method of operation of the dynamic preconditioning logic 200 which may include the signal analysis logic 202 and the table lookup generator 204. The method of operation begins and in operation block 701, the signal analysis logic 202 examines the echo canceller output and performs signal analysis. Based on the signal analysis such, as but not limited to, frequency domain analysis, the signal analysis logic 202 may determine in decision block 703 whether stationary noise is present in the audio signal. If, in decision block 703, the signal analysis logic 202 determines that a stationary noise type is present, then the table lookup generator 204 will send an appropriate control signal 209 to the configurable filter logic 203 to apply a high pass filter, and possibly other frequency specific filters, as shown in operation block 705. If a stationary noise type is not determined to be present in decision block 703, then the signal analysis logic 202 will look for non-stationary noise types as shown in decision block 707. If, in decision block 707, a non-stationary noise type is determined to be present in the audio signal, then the table lookup generator 204 will send an appropriate control signal 209 to the configurable filter logic 203 to apply frequency specific filters as shown in operation block 709. Subsequent to either of operation blocks 705 or 709, the method of operation proceeds to operation block 711 in which the pre-conditioned audio signal is provided to the noise suppressor. The method of operation then ends. However, if a non-stationary noise type is not determined to be present in decision block 707, then the audio signal without any pre-conditioning may be provided to the

12

noise suppressor as shown in operation block 713 and the method of operation then ends.

The flowchart of FIG. 8 provides details of a method of operation of the filter and gain selector 201 and the configurable filter logic 203. The method of operation begins and, in operation block 801, the filter and gain selector 201 examines the echo canceller output for its frequency content. For example, the signal analysis logic 202 of the filter and gain selector 201 may perform an FFT or some other frequency domain analysis on the echo canceller output (i.e. feedback signal 107) to determine the frequency content. In decision block 803, the signal analysis logic 202 determines if excessive constant/apparent noise is below a predetermined cutoff frequency. If yes, then the signal analysis logic 202 sends the control signal 208 to the table lookup generator 204. The table lookup generator 204 sends the control signal 209 to the configurable filter logic 203 to apply a predetermined high pass filter as shown in operation block 805. If no, in decision block 803, then the method of operation proceeds to decision block 807. The signal analysis logic 202 may determine if a near talker (i.e. a talker near to one or more of the microphones 210) is male or female in some embodiments, by determining whether the talker’s voice is within a given known frequency range. If not, then the method of operation proceeds to decision block 811. If the near talker’s voice is determined to be within a given known frequency range in decision block 807, then the appropriate control signal 209 is sent to the configurable filter logic 203 to apply appropriate pre-emphasis filters as shown in operation block 809.

In decision block 811, the signal analysis logic 202 determines, based on the feedback signal 107, if frequency response modification is needed. If not, then the method of operation proceeds to decision block 815. If yes, then the appropriate control signal is sent to the configurable filter logic 203 to apply a frequency modification filter or filters as needed as shown in operation block 813. In decision block 815, the signal analysis logic 202 may also determine the processing time available to perform additional filtering or to perform the filtering described in the FIG. 8 flowchart above. In other words, the echo canceller audio signal output 105 that is buffered by the buffer 131 may only delay the audio frame by a certain period of time. That is, the full-duplex communication channel must process and send out audio frames on a schedule for apparatus 300 such that the user experience of a real-time conversation is maintained. Therefore, based on the processing time available as determined in decision block 815, the signal analysis logic 202 may determine that additional filtering may be applied as needed as shown in operation block 817. Otherwise operation block 817 is bypassed and the buffer audio output signal 106 is provided as a pass through to the noise suppressor 140, as shown in operation block 819, and the method of operation ends.

Therefore among other advantages of the various embodiments, the noise suppression applied by noise suppressor 140 is improved because the audio signal input to the noise suppressor 140 is enhanced by the dynamic pre-conditioning logic 200 prior to applying noise suppression algorithms. The fixed pre-conditioning which would otherwise be applied by the send path fixed pre-conditioning logic 223 may be disabled

However, as mentioned above, the fixed pre-conditioning logic 223 may still be used in some embodiments depending on the granularity of its controllability. For example, if predetermined filters of the fixed preconditioning logic 223 may be individually enabled and disabled, or if amplifier gains may be individually adjusted, then the filter and gain selector 201 may directly control enabling and disabling of such fixed

13

pre-conditioning filters and/or gain via the control signal 231. However in other embodiments the fixed preconditioning logic 223 is globally disabled such that no features operate while the dynamic preconditioning logic 200 is operational (other than necessary ADCs, DACs, etc. that may be included in the fixed pre-conditioning unit 220).

It is to be understood that the various schematic block diagrams provided in FIG. 1 through FIG. 4 are limited to showing only those components useful to describe the features and advantages of the various embodiments, and to describe how to make and use the various embodiments to those of ordinary skill. It is therefore to be understood that various other components, circuitry, and devices etc. may be present in order to implement a an apparatus and that those various other components, circuitry, devices, etc., are understood to be present by those of ordinary skill. For example, one of ordinary skill will understand that a power source, such as a battery, will be present in the various apparatuses. In another example, one of ordinary skill will understand that the transceiver 150 may provide various processing such as, but not limited to, interleaving, channelization, control, etc.

The various components, circuitry, devices etc. described with respect to the figures including, but not limited to, those described using the term “logic” such as, but not limited to the dynamic pre-conditioning logic 200, echo canceller 130, noise suppressor 140, buffers, switch logic, etc., and/or the fixed pre-conditioning unit 220 or signal processing unit 230, etc., may be implemented in various ways such as by software and/or firmware executing on one or more programmable processors such as a central processing unit (CPU) or the like, or by ASICs, DSPs, FPGAs, hardwired circuitry (logic circuitry), or the like, or by any combinations thereof. In one example, the signal processing unit 230 may be implemented as an ASIC, a DSP, and FPGA or a programmable processor executing executable instructions that implement the methods of operation herein described. In another example, the dynamic pre-conditioning logic 200 may be implemented using an FPGA that interfaces with another FPGA that includes the echo canceller, noise suppressor, etc. Other examples that may occur to those of ordinary skill are contemplated by the examples and disclosure provided herein.

The terminology “operatively coupled” as used herein refers to coupling that enables operational and/or functional communication and relationships between the various components, circuitry, devices etc. described as being operatively coupled and may include any intervening items (i.e. buses, connectors, other components, circuitry, devices etc.) that may be present to enable such communication such as, for example, data communication buses or any other intervening items that one of ordinary skill would understand to be present. Also, it is to be understood that other intervening items may be present between “operatively coupled” items even though such other intervening items are not necessary to the functional communication facilitated by the operative coupling. For example, a data communication bus may be present in various embodiments and may provide data to several items along a pathway along which two or more items are operatively coupled, etc. Such operative coupling is shown generally in FIG. 1 through FIG. 4 described herein.

It is to be understood that the various “control signals” described herein with respect to various components such as, but not limited to, the dynamic pre-conditioning logic 200, filter and gain selector 201, various switch logic, fixed pre-conditioning unit 220, etc., may be implemented in various ways such as using application programming interfaces (APIs) between the various components. Additionally, operations involving the lookup table 181 may be implemented

14

using pointers where the components access the lookup table 181 as directed by the filter and gain selector 201 in some embodiments. In other words, control signal 209 and control signal 211 may be implemented such that the configurable filter logic 203 and adjustable gain 205 obtain control information such as, but not limited to, filter coefficients, gain values, etc., from the lookup table 181 stored in system memory 180 and that such implementations are contemplated embodiments and are in accordance with the various embodiments and examples described herein.

While various embodiments have been illustrated and described, it is to be understood that the invention is not so limited. Numerous modifications, changes, variations, substitutions and equivalents will occur to those skilled in the art without departing from the scope of the present invention as defined by the appended claims.

What is claimed is:

1. A computer-implemented method comprising:

receiving, by a dynamic pre-conditioning module that is communicatively coupled between a fixed pre-conditioning module and an echo cancelling module in a send path of a mobile communications device, an input audio signal from the fixed pre-conditioning module;

preconditioning, by the dynamic pre-conditioning module, the initial input audio based on one or more initial pre-conditioning parameters;

providing, by the dynamic pre-conditioning module, the preconditioned, initial input audio signal to the echo cancelling module;

receiving, by the dynamic pre-conditioning module, a subsequent input audio signal from the fixed pre-conditioning module;

receiving, by the dynamic pre-conditioning module, a feedback signal from the echo cancelling module to which the pre-conditioned, initial audio signal was provided;

determining, by the dynamic pre-conditioning module, one or more characteristics of the feedback signal from the echo cancelling module to which the preconditioned, initial audio signal was provided;

selecting, by the dynamic pre-conditioning module, one or more adjusted pre-conditioning parameters based on the one or more characteristics of the feedback signal;

pre-conditioning, by the dynamic pre-conditioning module, the subsequent input audio signal based on the one or more adjusted preconditioning parameters; and

providing, by the dynamic pre-conditioning module, the pre-conditioned, subsequent input audio signal to the echo cancelling module.

2. The method of claim 1, comprising:

providing a pre-conditioned echo cancelling audio signal output, based on the pre-conditioned, subsequent input audio signal, as a noise suppressor input; and performing noise suppression on the noise suppressor input.

3. The method of claim 1, wherein determining one or more characteristics of the feedback signal comprises:

determining one or more frequency or amplitude characteristics of the feedback signal.

4. The method of claim 1, wherein determining one or more characteristics of the feedback signal comprises:

performing a Fast Fourier Transform (FFT) on the feedback signal.

5. The method of claim 4, wherein determining one or more characteristics of the feedback signal comprises:

determining whether noise contained in the feedback signal is below a cutoff frequency; or

15

determining whether a near talker's voice contained in the feedback signal is within a given frequency range.

6. The method of claim 4, comprising:

determining processing time available to perform filtering of the audio signal; and

selecting audio signal filters based on the processing time available.

7. The method of claim 1, comprising:

disabling fixed pre-conditioner filtering, prior to pre-conditioning the subsequent input audio signal.

8. A system comprising:

one or more computers and one or more storage devices storing instructions that are operable, when executed by the one or more computers, to cause the one or more computers to perform operations comprising:

receiving, by a dynamic pre-conditioning module that is communicatively coupled between a fixed pre-conditioning module and an echo cancelling module in a send path of a mobile communications device, an input audio signal from the fixed pre-conditioning module;

preconditioning, by the dynamic pre-conditioning module, the initial input audio signal based on one or more initial pre-conditioning parameters;

providing, by the dynamic pre-conditioning module, the preconditioned, initial input audio signal to the echo cancelling module;

receiving, by the dynamic pre-conditioning module, a subsequent input audio signal from the fixed pre-conditioning module;

receiving, by the dynamic pre-conditioning module, a feedback signal from the echo cancelling module to which the pre-conditioned, initial audio signal was provided;

determining, by the dynamic pre-conditioning module, one or more characteristics of the feedback signal from the echo cancelling module to which the pre-conditioned, initial audio signal was provided;

selecting, by the dynamic pre-conditioning module, one or more adjusted pre-conditioning parameters based on the one or more characteristics of the feedback signal;

pre-conditioning, by the dynamic pre-conditioning module, the subsequent input audio signal based on the one or more adjusted preconditioning parameters; and

providing, by the dynamic pre-conditioning module, the pre-conditioned, subsequent input audio signal to the echo cancelling module.

9. The system of claim 8, wherein the operations further comprise:

providing a pre-conditioned echo cancelling audio signal output, based on the pre-conditioned, subsequent input audio signal, as a noise suppressor input; and

performing noise suppression on the noise suppressor input.

10. The system of claim 8, wherein determining one or more characteristics of the feedback signal comprises:

determining one or more frequency or amplitude characteristics of the feedback signal.

11. The system of claim 8, wherein determining one or more characteristics of the feedback signal comprises:

performing a Fast Fourier Transform (FFT) on the feedback signal.

12. The system of claim 11, wherein determining one or more characteristics of the feedback signal comprises:

16

determining whether noise contained in the feedback signal is below a cutoff frequency; or

determining whether a near talker's voice contained in the feedback signal is within a given frequency range.

13. The system of claim 11, wherein the operations further comprise:

determining processing time available to perform filtering of the audio signal; and

selecting audio signal filters based on the processing time available.

14. The system of claim 8, wherein the operations further comprise:

disabling fixed pre-conditioner filtering, prior to pre-conditioning the subsequent input audio signal.

15. A non-transitory computer-readable medium storing software comprising instructions executable by one or more computers which, upon such execution, cause the one or more computers to perform operations comprising:

receiving, by a dynamic pre-conditioning module that is communicatively coupled between a fixed pre-conditioning module and an echo cancelling module in a send path of a mobile communications device, an input audio signal from the fixed pre-conditioning module;

preconditioning, by the dynamic pre-conditioning module, the initial input audio signal based on one or more initial pre-conditioning parameters;

providing, by the dynamic pre-conditioning module, the preconditioned, initial input audio signal to the echo cancelling module;

receiving, by the dynamic pre-conditioning module, a subsequent input audio signal from the fixed pre-conditioning module;

receiving, by the dynamic pre-conditioning module, a feedback signal from the echo cancelling module to which the pre-conditioned, initial audio signal was provided;

determining, by the dynamic pre-conditioning module, one or more characteristics of the feedback signal from the echo cancelling module to which the preconditioned, initial audio signal was provided;

selecting, by the dynamic pre-conditioning module, one or more adjusted pre-conditioning parameters based on the one or more characteristics of the feedback signal;

pre-conditioning, by the dynamic pre-conditioning module, the subsequent input audio signal based on the one or more adjusted preconditioning parameters; and

providing, by the dynamic pre-conditioning module, the pre-conditioned, subsequent input audio signal to the echo cancelling module.

16. The medium of claim 15, wherein the operations further comprise:

providing a pre-conditioned echo cancelling audio signal output, based on the pre-conditioned, subsequent input audio signal, as a noise suppressor input; and

performing noise suppression on the noise suppressor input.

17. The medium of claim 15, wherein determining one or more characteristics of the feedback signal comprises:

determining one or more frequency or amplitude characteristics of the feedback signal.

18. The medium of claim 15, wherein determining one or more characteristics of the feedback signal comprises:

performing a Fast Fourier Transform (FFT) on the feedback signal.

19. The medium of claim 18, wherein determining one or more characteristics of the feedback signal comprises:

17

determining whether noise contained in the feedback signal is below a cutoff frequency; or
determining whether a near talker's voice contained in the feedback signal is within a given frequency range.
20. The system of claim **15**, wherein the operations further
comprise:
disabling fixed pre-conditioner filtering, prior to pre-conditioning the subsequent input audio signal.

* * * * *

18