DECLARATION OF JUNE ANN MUNFORD

1. My name is June Ann Munford. I am over the age of 18, have personal knowledge of the facts set forth herein, and am competent to testify to the same.

2. I earned a Master of Library and Information Science (MLIS) from the University of Wisconsin-Milwaukee in 2009. I have over ten years of experience in the library/information science field. Beginning in 2004, I have served in various positions in the public library sector including Assistant Librarian, Youth Services Librarian and Library Director. I have attached my Curriculum Vitae as Appendix CV.

3. During my career in the library profession, I have been responsible for materials acquisition for multiple libraries. In that position, I have cataloged, purchased and processed incoming library works. That includes purchasing materials directly from vendors, recording publishing data from the material in question, creating detailed material records for library catalogs and physically preparing that material for circulation. In addition to my experience in acquisitions, I was also responsible for analyzing large collections of library materials, tailoring library records for optimal catalog

search performance and creating lending agreements between libraries during my time as a Library Director.

4. I am fully familiar with the catalog record creation process in the library sector. In preparing a material for public availability, a library catalog record describing that material would be created. These records are typically written in Machine Readable Catalog (herein referred to as "MARC") code and contain information such as a physical description of the material, metadata from the material's publisher, and date of library acquisition. In particular, the 008 field of the MARC record is reserved for denoting the date of creation of the library record itself. As this typically occurs during the process of preparing materials for public access, it is my experience that an item's MARC record indicates the date of an item's public availability.

5. Typically, in creating a MARC record, a librarian would gather various bits of metadata such as book title, publisher and subject headings among others and assign each value to a relevant numerical field. For example, a book's physical description is tracked in field 300 while title/attribution is tracked in field 245. The 008 field of the MARC record is reserved for denoting the creation of the library record itself. As this is the only date reflecting the inclusion of said materials within the library's collection, it is my experience

that an item's 008 field accurately indicates the date of an item's public availability.

6. I am familiar with the Internet Archive, a digital library accessible to the general public. Among other services that the Internet Archive makes available to the general public is the Wayback Machine, an online archive of the web. The Internet Archive's Wayback Machine service archives webpages as of a certain capture date to track changes in the web over time. The Internet Archive has been in operation as a nonprofit library since 1996 and has hosted the Wayback Machine service since its inception in 2001. During my time as a librarian, I frequently used the Internet Archive's Wayback Machine for research and instruction purposes. This includes teaching instructional classes on using the Wayback Machine to library patrons and using the Wayback Machine to research reference inquiries that require hard-to-find online resources. I consider the Internet Archive's recordskeeping to be as rigorous and detailed as other formal library recordskeeping practices such as MARC records, OCLC records and Dublin Core.

7. I have reviewed Exhibit 1016, ISO/IEC Standard 14443: Identification Cards - Contactless Integrated Circuit(s) Cards by ISO.

8. Attached hereto as Appendix ISO01 is a true and correct copy of the MARC record for ISO/IEC Standard 14443: Identification Cards - Contactless Integrated Circuit(s) Cards as held by Penn State University Libraries. I secured this record myself from the library's public catalog. The MARC record contained within Appendix ISO01 accurately describes the title, author, publisher, and ISBN number of ISO/IEC Standard 14443: Identification Cards - Contactless Integrated Circuit(s) Cards.

9. Attached hereto as Appendix ISO02 is a true and correct copy of ISO/IEC Standard 14443: Identification Cards - Contactless Integrated Circuit(s) Cards as held by Penn State University Libraries. These scans were secured from the library's collection. In comparing Exhibit 1016 to Appendix ISO02, it is my determination that Exhibit 1016 is a true and correct copy of ISO/IEC Standard 14443: Identification Cards - Contactless Integrated Circuit(s) Cards by ISO. Appendix ISO02 contains all four volumes of the ISO-14443 standard as shown by the MARC 300, 490 and 830 fields in Appendix ISO01.

10. The 008 field of the MARC record in Appendix ISO01 indicates the date of record creation. The 008 field of Appendix ISO01 indicates Penn State

University Libraries first acquired ISO/IEC Standard 14443: Identification Cards - Contactless Integrated Circuit(s) Cards as of July 18, 2002. Considering this information, it is my determination that ISO/IEC Standard 14443: Identification Cards - Contactless Integrated Circuit(s) Cards was made available to the public shortly after its initial acquisition as of July 18, 2002.

11. The MARC record included in Appendix ISO01 indicates this standard was acquired and made available to the public as of July 18, 2002, prior to the publication of several amendments to this standard. The scans included in Appendix ISO02 indicates these amendments were appended to this initial copy of the standard and later bound in a hardcover volume in 2008, after the publication of the final amendment. In my experience, compiling regularly updated resources such as standards into a bound volume is a common archival practice for libraries and would not necessitate the creation of a new MARC record to describe the bound volume.

12. I have been retained on behalf of the Petitioner to provide assistance in the above-illustrated matter in establishing the authenticity and public availability of the documents discussed in this declaration. I am being compensated for my services in this matter at the rate of $200.00 per hour

plus reasonable expenses. My statements are objective, and my compensation does not depend on the outcome of this matter.

13. I declare under penalty of perjury that the foregoing is true and correct. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code.

Dated: 7/1/2025



June Ann Munford

APPENDIX CV

June A. Munford
Curriculum Vitae

Education

University of Wisconsin-Milwaukee - MS, Library & Information Science, 2009
Milwaukee, WI

- Coursework included cataloging, metadata, data analysis, library systems, management strategies and collection development.
- Specialized in library advocacy, cataloging and public administration.

Grand Valley State University - BA, English Language & Literature, 2008
Allendale, MI

- Coursework included linguistics, documentation and literary analysis.
- Minor in political science with a focus in local-level economics and government.

Professional Experience

Researcher / Expert Witness, October 2017 – present
Freelance ● Pittsburgh, Pennsylvania & Grand Rapids, Michigan

- Material authentication and public accessibility determination. Declarations of authenticity and/or public accessibility provided upon research completion. Experienced with appeals and deposition process.

- Research provided on topics of public library operations, material publication history, digital database services and legacy web resources.

- Past clients include Alston & Bird, Arnold & Porter, Baker Botts, Fish & Richardson, Erise IP, Irell & Manella, O'Melveny & Myers, Perkins-Coie, Pillsbury Winthrop Shaw Pittman and Slayden Grubert Beard.

Library Director, February 2013 - March 2015
Dowagiac District Library ● Dowagiac, Michigan

- Executive administrator of the Dowagiac District Library. Located in Southwest Michigan, this library has a service area of 13,000, an annual operating budget of over $400,000 and total assets of approximately $1,300,000.

● Developed careful budgeting guidelines to produce a 15% surplus during the 2013-2014 & 2014-2015 fiscal years while being audited.

● Using this budget surplus, oversaw significant library investments including the purchase of property for a future building site, demolition of existing buildings and building renovation projects on the current facility.

● Led the organization and digitization of the library's archival records.

● Served as the public representative for the library, developing business relationships with local school, museum and tribal government entities.

● Developed an objective-based analysis system for measuring library services - including a full collection analysis of the library's 50,000+ circulating items and their records.

November 2010 - January 2013
Librarian & Branch Manager, Anchorage Public Library ● Anchorage, Alaska

● Headed the 2013 Anchorage Reads community reading campaign including event planning, staging public performances and creating marketing materials for mass distribution.

● Co-led the social media department of the library's marketing team, drafting social media guidelines, creating original content and instituting long-term planning via content calendars.

● Developed business relationships with The Boys & Girls Club, Anchorage School District and the US Army to establish summer reading programs for children.

June 2004 - September 2005, September 2006 - October 2013
Library Assistant, Hart Area Public Library
Hart, MI

● Responsible for verifying imported MARC records and original MARC cataloging for the local-level collection as well as the Michigan Electronic Library.

● Handled OCLC Worldcat interlibrary loan requests & fulfillment via ongoing communication with lending libraries.

Professional Involvement

Alaska Library Association - Anchorage Chapter

- Treasurer, 2012

Library Of Michigan
- Level VII Certification, 2008
- Level II Certification, 2013

Michigan Library Association Annual Conference 2014
- New Directors Conference Panel Member

Southwest Michigan Library Cooperative
- Represented the Dowagiac District Library, 2013-2015

Professional Development

Library Of Michigan Beginning Workshop, May 2008
Petoskey, MI
- Received training in cataloging, local history, collection management, children's literacy and reference service.

Public Library Association Intensive Library Management Training, October 2011
Nashville, TN
- Attended a five-day workshop focused on strategic planning, staff management, statistical analysis, collections and cataloging theory.

Alaska Library Association Annual Conference 2012 - Fairbanks, February 2012
Fairbanks, AK
- Attended seminars on EBSCO advanced search methods, budgeting, cataloging, database usage and marketing.

Depositions

2019 ● Fish & Richardson

Apple v. Qualcomm (Case No. IPR2018-001281, 39521-00421IP, IPR2018-01282 and 39521-00421IP2)

2019 ● Erise IP

Implicit, LLC v. Netscout Systems, Inc (Case No. 2:18-cv-53-JRG)

2019 ● Perkins-Coie

Adobe Inc. v. RAH Color Technologies LLC (Case No. IPR2019-00627, IPR2019-00628, IPR2019-00629 and IPR2019-00646)

2020 ● O'Melveny & Myers

Maxell, Ltd. v. Apple Inc. (Case No. 5:19-cv-00036-RWS)

2021 ● Pillsbury Winthrop Shaw Pittman LLP

Intel v. SRC (Case No. IPR2020-1449)

2022 ● Perkins-Coie

Realtek v. Future Link (Case No. IPR2021-01182)

2023 ● Fish & Richardson

Neuroderm Ltd. v. Abbvie, Inc (Case No. PGR2022-00040)

2023 ● Fish & Richardson

Nearmap US Inc. v. Pictometry International Corp. (Case No. IPR2022-00735)

2023 ● Fish & Richardson

Samsung Electronics v. MemoryWeb LLC (Case No. 39843-0136PS1)

2023 ● Pillsbury Winthrop Shaw Whitman LLP

Gravel Rating Systems v. Costco Wholesale Corp. (Case No. 4:21-cv-149-ALM)

2024 ● Willkie-Farr

Netflix, Inc. v. VideoLabs. Inc. (Case No. IPR2023-00628)

2024 ● Quinn Emanuel Urquhart & Sullivan

Purdue University v. Wolfspeed (Case No. 1:21-CV-840)

2024 ● Fish & Richardson

Dish Network v. Entropic Communications (Case No. IPR2024-00393)

2025 ● Perkins Coie

Amazon.com, Inc. v. Nokia Technologies Oy (Case No. IPR2024-00572)

2025 ● Fish & Richardson

Dish Network v. Entropic Communications (Case No. IPR2024-00373)

Limited Case and Clientele History

Alston & Bird

- Ericsson

  v. Collision Communications (Case No. IPR2022-01233)

- Nokia

  v. Neptune Subsea, Xtera (Case No. 1:17-cv-01876)

- Universal Electronics Inc

  v. Roku Inc (Case No. IPR2022-00818)

Alavi & Anaipakos PLLC

- Stingray Group Inc. and Stingray Music USA, Inc.

  v. Edwin A. Hernandez-Mondragon and Egla Corp. (Case No. 1:24-cv-21226-RAR)

Arnold & Porter

- Ivantis

  v. Glaukos (Case No. 8:18-cv-00620)

- Samsung

  v. Jawbone (Case No. 2:21-cv-00186)

Benesch Friedlander Coplan & Aronoff

- Voyis

  v. Cathx (Case No. 5:21-cv-00077-RWS)

Buchanan, Ingersoll & Rooney PC

- Google LLC, AT&T Service Inc., T Mobile USA Inc., Cellco Partnership, Ericsson Inc. & Nokia of America Corp.

  v. KT Corp & Pegasus Wireless Innovation LLC (Case No. IPR2025-00293)

Deschert LLP

- Smaxtec Animal Care

  v. ST Reproductive Technologies, LLC (Case No. IPR2024-00885)

Duane Morris

- Kangxi Communication Technologies

  v. Skyworks Solutions Inc. (Case No. IPR2025-00373)

- Microsoft

  v. Edge Networking Systems LLC (Case No. 1:24-cv-00215)

Erise I.P.

- Apple

  v. Ericsson Inc. (Case No. IPR2022-00715)

  v. Future Link Systems (Case No. IPRs 6317804, 6622108, 6807505, and 7917680)

  v. INVT (Case No. 20-1881)

  v. Navblazer LLC (Case No. IPR2020-01253)

  v. Qualcomm (Case No. IPR2018-001281, 39521-00421IP, IPR2018-01282, 39521-00421IP2)

v. Quest Nettech Corp (Case No. 2:19-cv-00118-JRG)

v. Telefonaktiebolaget LM Ericsson (Case No. IPR2022-00275)

v. Theta IP, LLC (Case No. IPR2024-00818)

v. THL Holding Company LLC (Case No. 1:23-cv-00548)

- Fanduel

v. CGT (Case No. 19-1393)

- Garmin

v. Phillips North America LLC (Case No. 2:19-cv-6301-AB-KS)

- Netscout

v. Longhorn HD LLC (Case No. 2:20-cv-00349)

v. Implicit, LLC (Case No. 2:18-cv-53-JRG)

- Sony Interactive Entertainment LLC

v. Bot M8 LLC (Case No. IPR2020-01288)

v. Infernal Technology LLC (Case No. 2:19-CV-00248-JRG)

- Tesla

v. Charge Fusion Technologies LLC (Case No. IPR2025-00032)

- Unified Patents

v. GE Video Compression (Case No. 2:19-cv-248)

Fish & Richardson

- Apple

v. AliveCor (Case No. 3:21-cv-03958)

v. LBS Innovations (Case No. 2:19-cv-00119-JRG-RSP)

v. Koss Corporation (Case No. IPR2021-00305)

v. Masimo (Case No. IPR 50095-0012IP1, 50095-0012IP2, 50095-0013IP1, 50095-0013IP2, 50095-0006IP1, 50095-0135IP1)

v. Neonode (Case No. 21-cv-08872-EMC)

v. Qualcomm (Case No. IPR2018-001281, 39521-00421IP, IPR2018-01282, 39521-00421IP2)

v. Resonant Sys. (Case No. 7:23-cv-00077-ADA)

- AsusTek Computer Inc.
  v. Videolabs, Inc. (Case No. 22-CV-00720-ADA)

- Dell
  v. Neo Wireless (Case No. IPR2022-00616)

- Dish Network

  v. Entropic Communications, LLC (Case No. 2:2023-CV-01043)

  v. Entropic Communications LLC (Case No. IPR2024-00393)

  v. Realtime Adaptive Streaming (Case No. 1:17-CV-02097-RBJ)

  v. TQ Delta LLC (Case No. 18-1798)

- Evapco Dry Cooling

  v. SPG Dry Cooling (Case No. IPR2021-00688)

- Genetec

  v. Sensormatic Electronics (Case No. 1:20-CV-00760)

- Huawei

  v. Bell Northern Research LLC (Case No. IPR2019-01174)

- Kianxis

  v. Blue Yonder (Case No. 3:20-cv-03636)

- LG Electronics

  v. Bell Northern Research LLC (Case No. 3:18-cv-2864-CAB-BLM)

- MediaTek

  v. MOSAID (Case No. IPR2024-00718)

- Metaswitch

  v. Sonus Networks (Case No. IPR2018-01719)

- Microsoft

  v. Throughputer Inc (Case No. IPR2022-00757)

- Mom Enterprises

  v. Ddrops Company (Case No. 1:22-cv-00332)

- MLC Intellectual Property

  v. MicronTech (Case No. 3:14-cv-03657-SI)

- Nearmap Inc

  v. EagleView Technologies (Case No. IPR2022-01009)

- Neuroderm Ltd.

  v. Abbvie, Inc (Case No. PGR2022-00040)

- Posco Co Ltd.

  v. Pascal Drillet et al. (Case No. IPR2025-00370)

- Realtek Semiconductor

  v. Future Link (Case No. IPR2021-01182)

- Quectel
  - v. Koninklijke Philips (Case No. 1:20-cv-01710)

- Samsung
  - v. Aire Technology (Case No. IPR2022-00877)
  - v. Bell Northern Research (Case No. 2:19-cv-00286-JRG)
  - v. Communication Technologies Inc (Case No. IPR2022-01221)
  - v. Jawbone Innovations (Case No. IPR2022-00865)
  - v. MemoryWeb LLC (Case No. IPR2022-00885)
  - v. Dodots Licensing Solutions (Case No. IPR2023-00701)
  - v. Telefonaktiebolaget LM Ericsson (Case No. IPR2021-00615)

- Texas Instruments
  - v. Vantage Micro LLC (Case No. IPR2020-01261)

- Xilinx
  - v. Sentient Sensors LCC (Case No. 1:22-cv-00173)

Goodwin Proctor

- Intel
  - v. Proxense, LLC (Case No. 6:24-cv-00283)

- Samsung Electronics
  - v. Mobile Data Technologies (Case No. 2:24-cv-00435)

- Taiwan Semiconductor Manufacturing Company Ltd.
  - v. Advanced Integrated Circuit Process LLC (Case No. 2:24-cv-00623)

Groombridge Wu

- Nearmap

  v. Eagle View Technologies Inc. and Pictometry International Corp. (Case No. 2:21-cv-00283-TS-DAO)

Irell & Manella

- Curium

Latham & Watkins LLP

- Apple

  v. Advanced Coding Research LLC

Leydig, Voit & Mayer, Ltd.

- Public Availability Consultancy

O'Melveny & Myers

- Apple

  v. Maxell (Case No. 5:19-cv-00036-RWS)

- Disney Media & Entertainment Distribution LLC

  v. Digital Media Technology Holdings, LLC (Case No. 2:22-cv-01642)

- Micron Technology Inc.

  v. Besang Inc (Case No. IPR2023-00900)

- Samsung

  v. Daedalus Prime LLC (1335 Investigation)

Perkins-Coie

- Amazon
  - v. Nokia (Case No. IPR2024-00847 and IPR2024-00848)
  - v. Nokia Technologies Oy (Case No. IPR2024-00572)
- Heru Industries
  - v. The UAB Research Foundation (Case No. IPR2022-01148)
- Intel Corporation
  - v. BeSang Inc. (Case No. IPR2023-00991)
  - v. BitMICRO (Case No. 5:23-cv-00625)
  - v. Telefonaktiebolaget L M Ericsson (Case No. IPR2024-00610)
- Realtek Semiconductor
  - v. Future Link (Case No. IPR2021-01182)
- r-pac
  - v. Adasa, Inc. (Case No. 1:2024cv06102)
- Twitter Inc
  - v. VOIP-Pal.com (Case No. 3:20-cv-02397-JD)
- TCL Industries
  - v. Koninklijke Philips NV (Case No. IPR2021-00495, IPR2021-00496 and IPR2021-00497)
- VusionGroup
  - v. Hanshow (Case No. IPR2024-00857)

Pillsbury Winthrop Shaw Pittman

- Intel

  v. FG SRC LLC (Case No. 6:20-cv-00315)

- Gravel Rating Systems

  v. Costco (Case No. 4:21-cv-149)
  v. Lowe's Home Centers (Case No. 4:21-cv-150)
  v. T-Mobile USA (Case No. 4:21-cv-152)
  v. Kohl's Inc. (Case No. 4:21-cv-258)
  v. Under Armor (Case No. 4:21-cv-356)

Quinn Emanuel

- Exact Sciences Corporation

  v. Geneoscopy, Inc. (Case No. IPR2024-00459 and IPR2024-1330)

- ServiceNow, Inc.

  v. InQuisient, Inc. (Case No. 22-900-CJB)

- Wolfspeed

  v. The Trustees of Purdue University (Case No. 1:2021-cv-00840)

Sheppard, Mullin, Richter & Hampton LLP

- Advanced Micro Devices, Inc and Pensando Systems, Inc.

  v. Concurrent Ventures LLC and Xtreamedge, Inc. (Case No. IPR2025-00478)

- Cadence Design Systems Inc.

  v. Semiconductor Design Technologies (Case No. 3:23-cv-01001)

Shook, Hardy & Bacon LLP

- HP Inc.

  v. Universal Connectivity Technologies (Case No. 1:23-cv-01177)

Stern, Kessler, Goldstein & Fox

- Preliminary Research

Wilmer, Cutler, Pickering, Hale and Dorr

- Apple

  v. Shunock (Case No. 1:23-cv-08598)

- Quest Diagnostics Inc., Haystack Oncology Inc. and Haystack Oncology GmbH

  v. Natera, Inc. (Case No. 1:23-cv-08598)

- Roche Diabetes, Inc.

  v. Trividia Health, Inc. (Case No. 1:24-cv-00668)

Willkie, Farr & Gallagher LLP

- Lenovo, Dell, HP

  v. Universal Connectivity Technologies Inc. (Case No. 2:2023cv00449)

- Neurent

  v. The Foundry, LLC (Case No. IPR2024-00669)

- Netflix, Inc.

  v. VideoLabs, Inc. (Case No. IPR2023-00628)

APPENDIX ISO01

MARC View

LEADER 01812cam a2200361Ia 4500				
001 4444116				
003 SIRSI				
005 20151215083058.0				
008 020718m20002001sw a i000 0 eng d				
019			a| MARS	
035			a| (OCoLC)50191608	
040			a| TRL c| TRL d| UtOrBLW	
245	0	0	a| Identification cards--Contactless integrated circuit(s) cards : b| proximity cards = Cartes d'identification--Cartes à circuit(s) intégré(s) sans contacts : cartes de proximité.	
246	3	1	a| Cartes d'identification--Cartes à circuit(s) intégré(s) sans contacts : b| cartes de proximité.	
250			a| 1st ed.	
264		1	a| Geneva, Switzerland : b| International Organization for Standardization, c| 2000-2001.	
300			a| 4 volumes : b| illustrations ; c| 28 cm.	
336			a| text b| txt 2| rdacontent	
337			a| unmediated b| n 2| rdamedia	
338			a| volume b| nc 2| rdacarrier	
490	1		a| International standard ; v| ISO/IEC 14443-1, ISO/IEC 14443-2, ISO/IEC 14443-3, ISO/IEC 14443-4	
500			a| Updated by amendments and corrigenda.	
505	0		a| Part 1. Physical characteristics -- Part 2. Radio frequency power and signal interface -- Part 3. Initialization and anticollision -- Part 4. Transmission protocol.	
650		0	a| Smart cards.	
710	2		a| International Organization for Standardization.	
710	2		a| International Electrotechnical Commission.	
740	0	2	a| Physical characteristics	
740	0	2	a| Radio frequency power and signal interface	
740	0	2	a| Initialization and anticollision	
740	0	2	a| Transmission protocol.	
830		0	a| International standard ; v| ISO/IEC 14443-1, ISO/IEC 14443-2, ISO/IEC 14443-3, ISO/IEC 14443-4.	
590			a| Engineering copy bound in one volume.	
949			a| TK7895.S62I344 2000 w| LC c| 1 i| 000063608663 d| 3/6/2024 e| 4/24/2013 l| PATERNO-3 m| UP-PAT n| 3 q| 1 r| Y s| Y t| BOOK u| 5/12/2008	

ASK A LIBRARIAN

PennState

Copyright @2019 The Pennsylvania State University. All rights reserved. Except where otherwise noted, this work is subject to a Creative Commons Attribution 4.0 license. Details and exceptions.

Legal Statements | PSU Hotlines

PENN STATE UNIVERSITY LIBRARIES

Libraries Home (814) 865-6368
Libraries Intranet (Staff Only)
Accessibility Help
Website Feedback
Policies and Guidelines
Staff Directory

CONNECT WITH PENN STATE UNIVERSITY LIBRARIES

Facebook
Twitter
Instagram

Identification cards--Contactless integrated circuit(s) cards : proximity cards = Cartes d'identification--Cartes à circuit(s) intégré(s) sans contacts : cartes de proximité

Additional Titles	Cartes d'identification--Cartes à circuit(s) intégré(s) sans contacts : cartes de proximité
Published	Geneva, Switzerland : International Organization for Standardization, 2000-2001.
Edition	1st ed.
Physical Description	4 volumes : illustrations ; 28 cm.
Additional Creators	International Organization for Standardization and International Electrotechnical Commission

ASK A LIBRARIAN

Availability

Browse Nearby on Shelf I Want It

Pattee Library and Paterno Library Stacks (1 item)

Call number	Material	Location
TK7895.S62I344 2000	Book	Being transferred between libraries

Series

International standard ; ISO/IEC 14443-1, ISO/IEC 14443-2, ISO/IEC 14443-3, ISO/IEC 14443-4.

Contents

Part 1. Physical characteristics -- Part 2. Radio frequency power and signal interface -- Part 3. Initialization and anticollision -- Part 4. Transmission protocol.

Subject(s)

Smart cards

Related Titles

Physical characteristics
Radio frequency power and signal interface
Initialization and anticollision
Transmission protocol

Note

Updated by amendments and corrigenda.
Engineering copy bound in one volume.

View MARC record | catkey: 4444116

PennState

Copyright @2019 The Pennsylvania State University. All rights reserved. Except where otherwise noted, this work is subject to a Creative Commons Attribution 4.0 license. Details and exceptions.

Legal Statements | PSU Hotlines

PENN STATE UNIVERSITY LIBRARIES
Libraries Home (814) 865-6368
Libraries Intranet (Staff Only)
Accessibility Help
Website Feedback
Policies and Guidelines
Staff Directory

CONNECT WITH PENN STATE UNIVERSITY LIBRARIES
Facebook
Twitter
Instagram

APPENDIX ISO02

IPR2025-01234
Apple EX1033 Page 27

IDENTIFICATION CARDS--CONTACTLESS INTEGRATED CIRCUIT(S) CARDS

ENGIN TK7895 .S62 I344 2000

IPR2025-01234
Apple EX1033 Page 28

PENN STATE UNIVERSITY LIBRARIES
A00006360866 3

IPR2025-01234
Apple EX1033 Page 29

ENGINEERING LIBRARY

IPR2025-01234
Apple EX1033 Page 30

Identification cards – Contactless integrated circuit(s) cards – Proximity cards –

This volume contains:

ISO/IEC 14443-1
ISO/IEC 14443-2
ISO/IEC 14443-2 Amendment 1
ISO/IEC 14443-2 Technical Corrigendum 1
ISO/IEC 14443-3
ISO/IEC 14443-3 Amendment 1
ISO/IEC 14443-3 Amendment 3
ISO/IEC 14443-3 Technical Corrigendum 1
ISO/IEC 14443-4
ISO/IEC 14443-4 Amendment 1

IPR2025-01234
Apple EX1033 Page 31

INTERNATIONAL STANDARD

ISO/IEC 14443-1

First edition
2000-04-15

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 1: Physical characteristics

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contacts — Cartes de proximité —

Partie 1: Caractéristiques physiques

Reference number
ISO/IEC 14443-1:2000(E)

© ISO/IEC 2000

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 32

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 734 10 79
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2000 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTerse with ISO

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 14443 may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 14443-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Identification cards and related devices.*

ISO/IEC 14443 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit(s) cards — Proximity cards*:

— *Part 1: Physical characteristics*

— *Part 2: Radio frequency interface power and signal interface*

— *Part 3: Initialization and anticollision*

— *Part 4: Transmission protocol*

Annexes A and B of this part of ISO/IEC 14443 are for information only.

© ISO/IEC 2000 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS Under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 34

Introduction

ISO/IEC 14443 is one of a series of International Standards describing the parameters for identification cards as defined in ISO/IEC 7810 and the use of such cards for international interchange.

This part of ISO/IEC 14443 describes the physical characteristics of proximity cards.

This part of ISO/IEC 14443 does not preclude the incorporation of other standard technologies on the card, such as those referenced in the informative annex A.

Contactless card Standards cover a variety of types as embodied in ISO/IEC 10536 (Close-coupled cards), ISO/IEC 14443 (Proximity cards), ISO/IEC 15693 (Vicinity cards). These are intended for operation when very near, nearby and at a longer distance from associated coupling devices respectively.

ISO/IEC 14443 is intended to allow operation of Proximity cards in the presence of other contactless cards conforming to ISO/IEC 10536 and ISO/IEC 15693 standards.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2000 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTense with ISO

Identification cards — Contactless integrated circuit(s) cards — Proximity cards — Part 1: Physical characteristics

1 Scope

This part of ISO/IEC 14443 specifies the physical characteristics of proximity cards (PICC). It applies to identification cards of the card type ID-1 operating in proximity of a coupling device.

This part of ISO/IEC 14443 shall be used in conjunction with later parts of ISO/IEC 14443.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 14443. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO/IEC 14443 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 7810, *Identification cards - Physical characteristics.*

ISO/IEC 10373, *Identification cards - Test methods.*

IEC 61000-4-2, *Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test.*

3 Terms and definitions

For the purposes of this part of ISO/IEC 14443, the following definitions apply.

3.1
integrated circuit(s) (IC)
Electronic component(s) designed to perform processing and/or memory functions.

3.2
contactless
Pertaining to the achievement of signal exchange with and supplying power to the card without the use of galvanic elements (i.e., the absence of an ohmic path from the external interfacing equipment to the integrated circuit(s) contained within the card).

3.3
contactless integrated circuit(s) card
A card of the card type ID-1 (as specified in ISO/IEC 7810) into which integrated circuit(s) have been placed and in which communication to such integrated circuit(s) is done in a contactless manner.

© ISO/IEC 2000 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 0169985
Not for Resale,2008/5/7 17:48:9 GMT
ense with ISO

IPR2025-01234
Apple EX1033 Page 36

3.4
proximity card (PICC)
A card of the card type ID-1 into which integrated circuit(s) and coupling means have been placed and in which communication to such integrated circuit(s) is done by inductive coupling in proximity of a coupling device.

3.5
proximity coupling device (PCD)
The reader/writer device that uses inductive coupling to provide power to the PICC and also to control the data exchange with the PICC.

4 Physical characteristics

4.1 General

The PICC shall have physical characteristics according to the requirements for the card type ID-1 specified in ISO/IEC 7810.

4.2 Dimensions

The nominal dimensions of the PICC shall be as for the card type ID-1 specified in ISO/IEC 7810.

4.3 Additional characteristics

4.3.1 Ultra-violet light

This part of the ISO/IEC 14443 excludes requirements for protection of the PICC against the effects of ultra-violet light levels greater than those in ordinary daylight at sea-level. Where greater protection is needed it shall be the responsibility of the card manufacturer to provide it and to state the tolerable level of ultra-violet light.

4.3.2 X-rays

The PICC shall continue to operate as intended after exposure of either face to medium-energy X-radiation, with energy in the range of 70 keV to 140 keV, of a cumulative dose of 0,1 Gy per year.

NOTE This corresponds to approximately twice the maximum acceptable dose to which humans may be exposed annually.

4.3.3 Dynamic bending stress

The PICC shall continue to operate as intended after testing in accordance with the test methods described in ISO/IEC 10373 where the maximum deflections about the short and long cards axes are h_A = 20 mm and h_B = 10 mm.

4.3.4 Dynamic torsional stress

The PICC shall continue to operate as intended after testing in accordance with the test methods described in ISO/IEC 10373 where the maximum angle of rotation is $\alpha = 15°$.

4.3.5 Alternating magnetic fields

The PICC shall continue to operate as intended after exposure, in any orientation, to a magnetic field with an average level given in the Table 1. The averaging time is 6 minutes and the maximum rms level of the magnetic field is limited to 33 times the average level.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2000 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:46:9 GMT+ense with ISO

IPR2025-01234
Apple EX1033 Page 37

Table 1 — Magnetic Field Strength vs Frequency

Frequency Range (MHz)	Average Magnetic Field Strength (A/m rms)
0,3 - 3,0	1,63
3,0 - 30	4,89/*f*
30 - 300	0,163

f : frequency in MHz

Additionally, the PICC shall continue to operate as intended after continuous exposure to a magnetic field of an average level of 10 A/m rms at 13,56 MHz. The averaging time is 30 seconds and the maximum level of the magnetic field is limited to 12 A/m rms.

4.3.6 Alternating electric field

The PICC shall continue to operate as intended after exposure, in any orientation, to an electric field with an average level given in the Table 2. The averaging time is 6 minutes and the maximum rms level of the electric field is limited to 33 times the average level.

Table 2 — Electric Field Strength vs Frequency

Frequency Range (MHz)	Average Electric Field Strength (V/m rms)
0,3 - 3,0	614
3,0 - 30	1842/*f*
30 - 300	61,4

f: frequency in MHz

4.3.7 Static electricity

The PICC shall continue to operate as intended after testing in accordance with the test methods described in ISO/IEC 10373 (referring to IEC 61000-4-2:1995), where the test voltage is 6 kV.

4.3.8 Static magnetic field

The PICC shall continue to operate as intended after exposure to a static 640 kA/m magnetic field.

WARNING — The data content of a magnetic stripe might be erased by such a field.

4.3.9 Operating temperature

The PICC shall operate as intended over an ambient temperature range of 0 °C to 50 °C.

© ISO/IEC 2000 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 38

Annex A
(informative)

Standards compatibility

This part of ISO/IEC 14443 does not preclude the addition of other existing card standards on the PICC, such as those listed as follows:

ISO/IEC 7811, *Identification cards - Recording technique.*

ISO/IEC 7812, *Identification cards - Identification of issuers.*

ISO/IEC 7813, *Identification cards - Financial transaction cards.*

ISO/IEC 7816, *Identification cards - Integrated circuit(s) cards with contacts.*

ISO/IEC 10536, *Identification cards - Contactless integrated circuit(s) cards - Close-coupled cards.*

ISO/IEC 15693, *Identification cards - Contactless integrated circuit(s) cards - Vicinity cards.*

WARNING — Restrictions may apply to embossing of the PICC.

A
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2000 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTense with ISO

Annex B
(informative)

Surface quality for printing

Where there is a requirement to customise the PICC after the manufacturing process by overprinting, care should be taken to ensure the areas used for printing are of sufficient quality appropriate to the printing technique or printer used.

Copyright International Organization for Standardization © ISO/IEC 2000 – All rights reserved
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 40

ICS 35.240.15

Price based on 5 pages

© ISO/IEC 2000 – All rights reserved

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:9 GMTense with ISO

INTERNATIONAL STANDARD

ISO/IEC 14443-2

First edition
2001-07-01

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 2: Radio frequency power and signal interface

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 2: Puissance de la fréquence radio et interface du signal

Reference number
ISO/IEC 14443-2:2001(E)

© ISO/IEC 2001

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTerse with ISO

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 43

Contents

Page

Foreword iv
Introduction v
1 Scope 1
2 Normative references 1
3 Terms and definitions 1
4 Symbols and abbreviated terms 2
5 Initial dialogue for proximity cards 3
6 Power transfer 3
6.1 Frequency 3
6.2 Operating field 3
7 Signal interface 3
8 Communication signal interface Type A 4
8.1 Communication PCD to PICC 4
8.1.1 Bit rate 4
8.1.2 Modulation 4
8.1.3 Bit representation and coding 6
8.2 Communication PICC to PCD 7
8.2.1 Bit rate 7
8.2.2 Load modulation 7
8.2.3 Subcarrier 7
8.2.4 Subcarrier modulation 7
8.2.5 Bit representation and coding 7
9 Communication signal interface Type B 8
9.1 Communication PCD to PICC 8
9.1.1 Bit rate 8
9.1.2 Modulation 8
9.1.3 Bit representation and coding 8
9.2 Communication PICC to PCD 9
9.2.1 Bit rate 9
9.2.2 Load modulation 9
9.2.3 Subcarrier 9
9.2.4 Subcarrier modulation 9
9.2.5 Bit representation and coding 9
10 PICC minimal coupling zone 10
Annex A (informative) Compatibility with other card standards 11

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 44

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 14443-2 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Identification cards and related devices*.

ISO/IEC 14443 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit(s) cards — Proximity cards*.

— *Part 1: Physical characteristics*

— *Part 2: Radio frequency power and signal interface*

— *Part 3: Initialization and anticollision*

— *Part 4: Transmission protocol*

Annex A of this part of ISO/IEC 14443 is for information only.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTense with ISO

Introduction

ISO/IEC 14443 is one of a series of International Standards describing the parameters for identification cards as defined in ISO/IEC 7810 and the use of such cards for international interchange.

This part of ISO/IEC 14443 describes the electrical characteristics of two types of contactless interface between a proximity card and a proximity coupling device. The interface includes both power and bi-directional communication.

This part of ISO/IEC 14443 does not preclude the incorporation of other standard technologies on the card, such as those referenced in Annex A.

Contactless card standards cover a variety of types as embodied in ISO/IEC 10536 (close-coupled cards), ISO/IEC 14443 (proximity cards), ISO/IEC 15693 (vicinity cards). These are intended for operation when very near, nearby and at a longer distance from associated coupling devices respectively.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this part of ISO/IEC 14443 may involve the use of patents.

ISO and IEC take no position concerning the evidence, validity and scope of this patent right.

The holders of these patent rights have assured ISO and IEC that they are willing to negotiate licences under reasonable and non discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of patent rights are registered with ISO and IEC. Information may be obtained from:

US Patent US5359323

FRANCE TELECOM
Centre National d'Etudes des
Télécommunications
38-40 rue de Général Leclerc
92794 Issy-les-Molineaux
Cedex 9
France

WO 98/26370
Clause 9.1.2 (Type B) Modulation
WO 98/26370 A1 (pending)
US Patent US 5613159 (Type B)
Europe 0 901 670
French Patent App 96.15163
Int Pat App
PCT/FR97/02229
Innovatron Electronique / RATP
sub clause 9.1.2 and 9.1.3.

INNOVOTRON
Director of International Operations
Innovotrol
1 Rue Danton
75006 Paris
France

MOTOROLA
Motorola ESG
207 route de Ferney
P O Box 15
1218 Grand-Saconnex
Geneva
Switzerland

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 46

	OMRON Intellectual Property Department Law & Intellectual Property H.Q. 20, Igadera Shimokaiinji Nagaokakyo City Kyoto 617-8510 Japan
Patent EP 0 492 569 B1 A system and method for the non-contact transmission of data.	ON-TRACK INNOVATIONS Z.H.R. Industrial Zone P O Box 32 Rosh-Pina 12000 Israel
PHO 90.508 EP-PS 047 35 69 (CH,DE,FR,GB,NL) JP-A 91-211035 US-PS 5 345 231 AT-PS 395 224 Relates to "radio interference interface" as specified in ISO/IEC 14443-2	PHILIPS Director Koninklijke Philips Electronics N.V. P. O. Box 220 5600 AE Eindhoven The Netherlands
Japan patent: 2705076 Japan Utility: 2137036 Europe patent: 324564 Europe patent: 435137 Describing the methods of returning signals from PICC, and related to the load switching technology. Both Type A and Type B are using this technology	SONY CORPORATION Intellectual Property Department Communiactions Systems Solutions Network Co. 6-7-37 Kitashinagawa Shinagawa-ku Tokyo, 141-0001 Japan

The following companies may hold patents relating to this part of ISO/IEC 14443 but have not provided details of the patents or agreed to provide licences.

US 4 650 981	WAYNE S FOLETTA CA 95129, USA 4760 Castlewood Drive San Jose, California CA 9512 USA
US Patent No. 4, 661,691	JOHN W HALPERN C/O Vincent M DeLuca Rothwell, Figg, Ernst & Kurz, p.c. 555 Thirteenth Street, N.W. Suite 701 East Tower Washington, D.C. 20004
WO 89 05549 A	MAGELLAN CORPORATION 8717 Research Drive Irvine CA 92618 USA

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 14443 may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTense with ISO

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 2:
Radio frequency power and signal interface

1 Scope

This part of ISO/IEC 14443 specifies the characteristics of the fields to be provided for power and bi-directional communication between proximity coupling devices (PCDs) and proximity cards (PICCs).

This part of ISO/IEC 14443 is intended to be used in conjunction with other parts of ISO/IEC 14443.

This part of ISO/IEC 14443 does not specify the means of generating coupling fields, nor the means of compliance with electromagnetic radiation and human exposure regulations which can vary according to country.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 14443. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO/IEC 14443 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to apply. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 7816-2, *Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 2: Dimensions and location of the contacts*

ISO/IEC 10373-6, *Identification cards – Test methods – Proximity cards*

ISO/IEC 14443-1, *Identification cards – Contactless integrated circuit(s) cards – Proximity cards – Part 1: Physical characteristics*

ISO/IEC 14443-3, *Identification cards – Contactless integrated circuit(s) cards – Proximity cards – Part 3: Initialization and anticollision*

3 Terms and definitions

For the purposes of this part of ISO/IEC 14443, the following terms and definitions apply.

3.1
bit duration
time during which a logic level is defined, at the end of which a new bit starts

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697685
Not for Resale 2008/5/7 17:48:7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 48

3.2
binary phase shift keying
phase shift keying where the phase shift is 180°, resulting in two phase state possibilities

3.3
modulation index
defined as [*a-b*]/[*a+b*] where *a* and *b* are the peak and minimum signal amplitude respectively. The value of the index may be expressed as a percentage

3.4
NRZ-L
method of bit coding whereby a logic level during a bit duration is represented by one of two defined physical states of a communication medium

3.5
subcarrier
signal of frequency *fs* used to modulate a carrier of frequency *fc*

3.6
Manchester
method of bit coding whereby a logic level during a bit duration is represented by a sequence of two defined physical states of a communication medium. The order of the physical states within the sequence defines the logical state

3.7
TR0
guard time between the end of a PCD transmission and the start of the PICC subcarrier generation

3.8
TR1
synchronization time between the start of the PICC subcarrier generation and the start of the PICC subcarrier modulation

4 Symbols and abbreviated terms

ASK	Amplitude Shift Keying
BPSK	Binary Phase Shift Keying
fc	Frequency of operating field (carrier frequency)
fs	Frequency of subcarrier modulation
NRZ-L	Non-Return to Zero (L for level)
OOK	On/Off Keying
PCD	Proximity Coupling Device
PICC	Proximity Card
RF	Radio Frequency

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 49

5 Initial dialogue for proximity cards

The initial dialogue between the PCD and the PICC shall be conducted through the following consecutive operations:

— activation of the PICC by the RF operating field of the PCD;

— the PICC shall wait silently for a command from the PCD;

— transmission of a command by the PCD;

— transmission of a response by the PICC.

These operations shall use the RF power and signal interface specified in the following clauses.

6 Power transfer

The PCD shall produce an energizing RF field which couples to the PICC to transfer power and which shall be modulated for communication.

6.1 Frequency

The frequency *fc* of the RF operating field shall be 13,56 MHz ±7 kHz.

6.2 Operating field

The minimum unmodulated operating field shall be *H*min and has a value of 1,5 A/m rms.

The maximum unmodulated operating field shall be *H*max and has a value of 7,5 A/m rms.

A PICC shall operate as intended continuously between *H*min and *H*max.

A PCD shall generate a field of at least *H*min and not exceeding *H*max at manufacturer specified positions (operating volume).

In addition the PCD shall be capable of powering any single reference PICC (defined in ISO/IEC 10373-6) at manufacturer specified positions (operating volume).

The PCD shall not generate a field higher than the value specified in ISO/IEC 14443-1 (alternating magnetic field) in any possible PICC position.

Test methods for the PCD operating field are defined in ISO/IEC 10373-6.

7 Signal interface

Two communication signal interfaces, Type A and Type B, are described in the following clauses.

The PCD shall alternate between modulation methods when idling before detecting the presence of a PICC of Type A or Type B.

Only one communication signal interface may be active during a communication session until deactivation by the PCD or removal of the PICC. Subsequent session(s) may then proceed with either modulation method.

Figure 1 is an illustration of the concepts described in the following clauses.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTonse with ISO

IPR2025-01234
Apple EX1033 Page 50

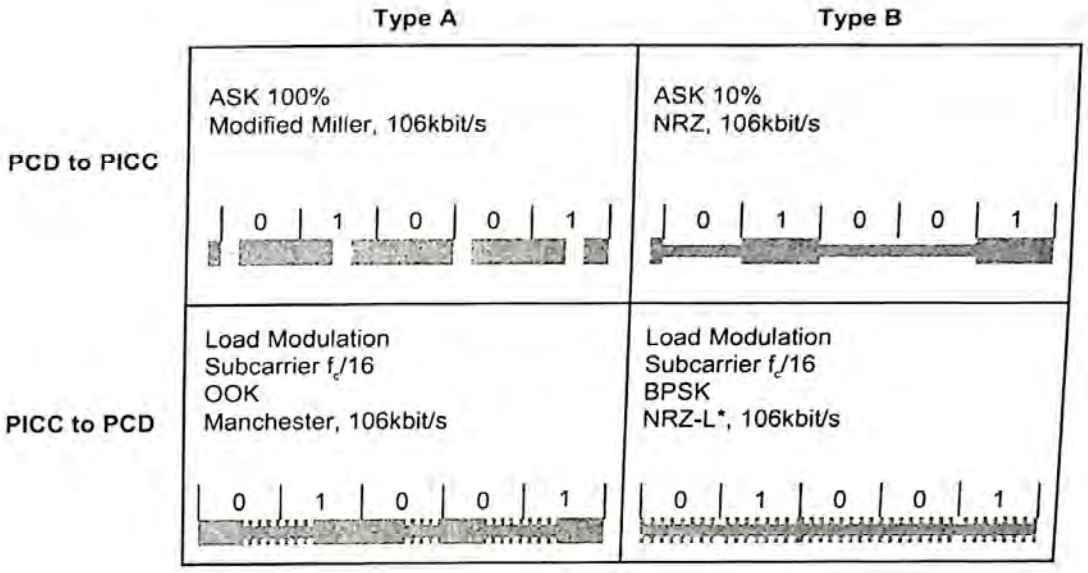


Figure 1 — Example communication signals for Type A and Type B interfaces

8 Communication signal interface Type A

8.1 Communication PCD to PICC

8.1.1 Bit rate

The bit rate for the transmission during initialization and anticollision shall be *fc*/128 (~106 kbit/s).


8.1.2 Modulation

Communication from PCD to PICC for a bit rate of *fc*/128 shall use the modulation principle of ASK 100% of the RF operating field to create a "Pause" as shown in figure 2.

The envelope of the PCD field shall decrease monotonically to less than 5% of its initial value $H_{INITIAL}$ and remain less than 5% for more than t2. This envelope shall comply to figure 2.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:7 GMTense with ISO

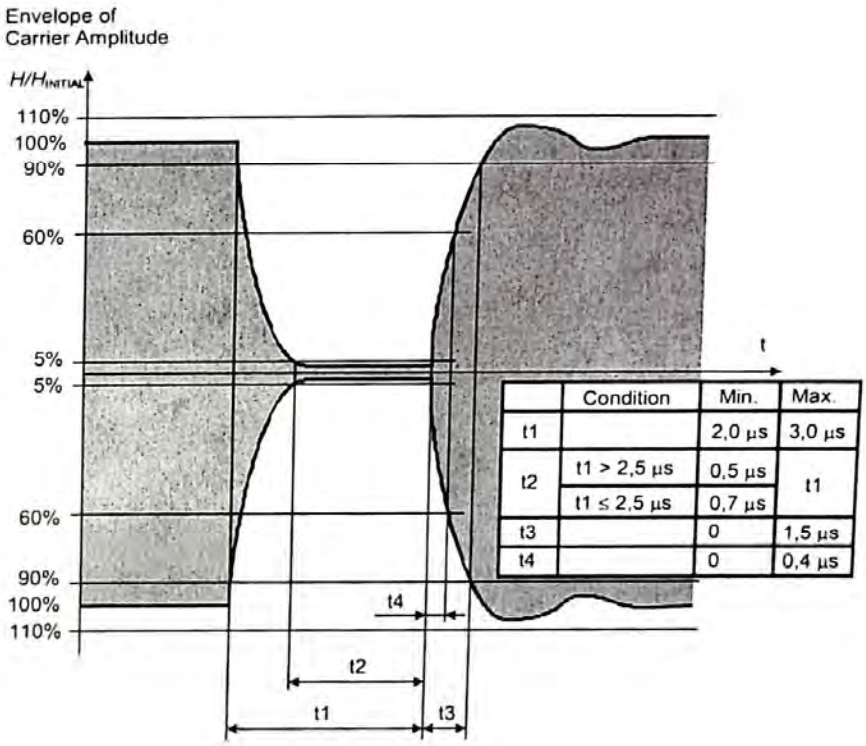

	Condition	Min.	Max.
t1		2,0 µs	3,0 µs
t2	t1 > 2,5 µs	0,5 µs	t1
	t1 ≤ 2,5 µs	0,7 µs	
t3		0	1,5 µs
t4		0	0,4 µs

Figure 2 — Pause


If the envelope of the PCD field does not decrease monotonically, the time between a local maximum and the time of passing the same value before the local maximum shall not exceed 0,5 µs. This shall only apply if the local maximum is greater than 5% of $H_{INITIAL}$.

Overshoots shall remain within 90% and 110% of $H_{INITIAL}$.

The PICC shall detect the "End of Pause" after the field exceeds 5% of $H_{INITIAL}$ and before it exceeds 60% of $H_{INITIAL}$. Figure 3 shows the definition of the "End of Pause". This definition applies to all modulation envelope timings.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48 7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 52

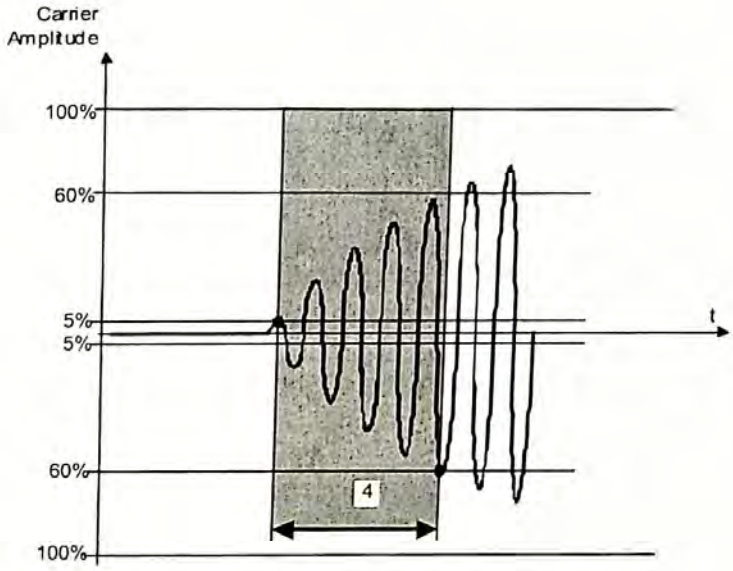

NOTE In systems designed to handle only one card at a time, t4 need not be respected.

Figure 3 — Definition of "End of Pause"

8.1.3 Bit representation and coding

The following sequences are defined:

— sequence X: after a time of half the bit duration a "Pause" shall occur.

— sequence Y: for the full bit duration no modulation shall occur.

— sequence Z: at the beginning of the bit duration a "Pause" shall occur.

The above sequences shall be used to code the following information:

— logic "1": sequence X.

— logic "0": sequence Y with the following two exceptions:

i) If there are two or more contiguous "0"s, sequence Z shall be used from the second "0" on.

ii) If the first bit after a "start of frame" is "0", sequence Z shall be used to represent this and any "0"s which follow directly thereafter.


— start of communication: sequence Z.

— end of communication: logic "0" followed by sequence Y.

— no information: at least two sequences Y.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:7 GMTense with ISO

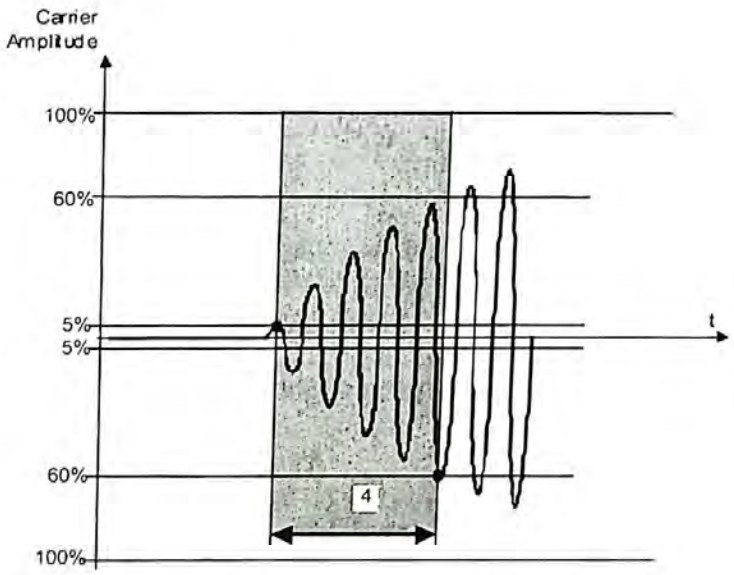

NOTE In systems designed to handle only one card at a time, t4 need not be respected.

Figure 3 — Definition of "End of Pause"

8.1.3 Bit representation and coding

The following sequences are defined:

— sequence X: after a time of half the bit duration a "Pause" shall occur.

— sequence Y: for the full bit duration no modulation shall occur.

— sequence Z: at the beginning of the bit duration a "Pause" shall occur.

The above sequences shall be used to code the following information:

— logic "1": sequence X.

— logic "0": sequence Y with the following two exceptions:

i) If there are two or more contiguous "0"s, sequence Z shall be used from the second "0" on.

ii) If the first bit after a "start of frame" is "0", sequence Z shall be used to represent this and any "0"s which follow directly thereafter.

— start of communication: sequence Z.

— end of communication: logic "0" followed by sequence Y.

— no information: at least two sequences Y.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 54

8.2 Communication PICC to PCD

8.2.1 Bit rate

The bit rate for the transmission during initialization and anticollision shall be *fc*/128 (~106 kbit/s).

8.2.2 Load modulation

The PICC shall be capable of communication to the PCD via an inductive coupling area where the carrier frequency is loaded to generate a subcarrier with frequency *fs*. The subcarrier shall be generated by switching a load in the PICC.

The load modulation amplitude shall be at least $30/H^{1,2}$ (mVpeak) when measured as described in ISO/IEC 10373-6, where *H* is the (rms) value of magnetic field strength in A/m.

8.2.3 Subcarrier

The frequency *fs* of the subcarrier shall be *fc*/16 (~847 kHz). Consequently, during initialization and anticollision, one bit duration is equivalent to 8 periods of the subcarrier.

8.2.4 Subcarrier modulation

Every bit period shall start with a defined phase relation to the subcarrier. The bit period shall start with the loaded state of the subcarrier.

The subcarrier is modulated using OOK with the sequences defined in 8.2.5.

8.2.5 Bit representation and coding

The following sequences are defined :

— sequence D: the carrier shall be modulated with the subcarrier for the first half (50%) of the bit duration.

— sequence E: the carrier shall be modulated with the subcarrier for the second half (50%) of the bit duration.

— sequence F: the carrier is not modulated with the subcarrier for one bit duration.

Bit coding shall be Manchester with the following definitions:

— logic "1": sequence D

— logic "0": sequence E

— start of communication: sequence D

— end of communication: sequence F

— no information: no subcarrier

Copyright International Organization for Standardization reserved
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2005/5/7 17:48:7 GMTerse with ISO

IPR2025-01234
Apple EX1033 Page 55

9 Communication signal interface Type B

9.1 Communication PCD to PICC

9.1.1 Bit rate

The bit rate for the transmission during initialization and anticollision shall be nominally *fc*/128 (~106 kbit/s). Tolerance and bit boundaries are defined in ISO/IEC 14443-3.

9.1.2 Modulation

Communication from PCD to PICC shall use the modulation principle of ASK 10% of the RF operating field.

The modulation index shall be between 8% and 14%.

The modulation waveform shall comply to figure 4. The rising and falling edges of the modulation shall be monotonic.

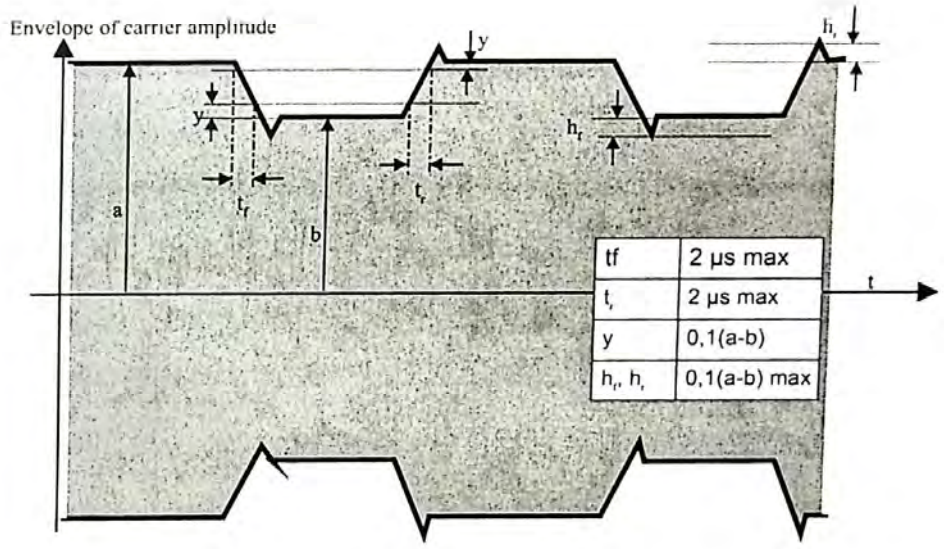


Figure 4 — Type B modulation waveform

9.1.3 Bit representation and coding

Bit coding format shall be NRZ-L with logic levels defined as follows:

— logic "1": carrier high field amplitude (no modulation applied).

— logic "0": carrier low field amplitude.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTense with ISO

9.2 Communication PICC to PCD

9.2.1 Bit rate

The bit rate for the transmission during initialization and anticollision shall be nominally *fc*/128 (~106 kbit/s).

9.2.2 Load modulation

The PICC shall be capable of communication to the PCD via an inductive coupling area where the carrier frequency is loaded to generate a subcarrier with frequency *fs*. The subcarrier shall be generated by switching a load in the PICC.

The load modulation amplitude shall be at least $30/H^{1,2}$ (mVpeak) when measured as described in ISO/IEC 10373-6, where *H* is the (rms) value of magnetic field strength in A/m.

9.2.3 Subcarrier

The frequency *fs* of the subcarrier shall be *fs*/16 (~847 kHz). Consequently, during initialization and anticollision, one bit period is equivalent to 8 periods of the subcarrier.

The PICC shall generate a subcarrier only when data is to be transmitted.

9.2.4 Subcarrier modulation

The subcarrier shall be BPSK modulated, see example in figure 5. Phase shifts shall only occur at nominal positions of rising or falling edges of the subcarrier.

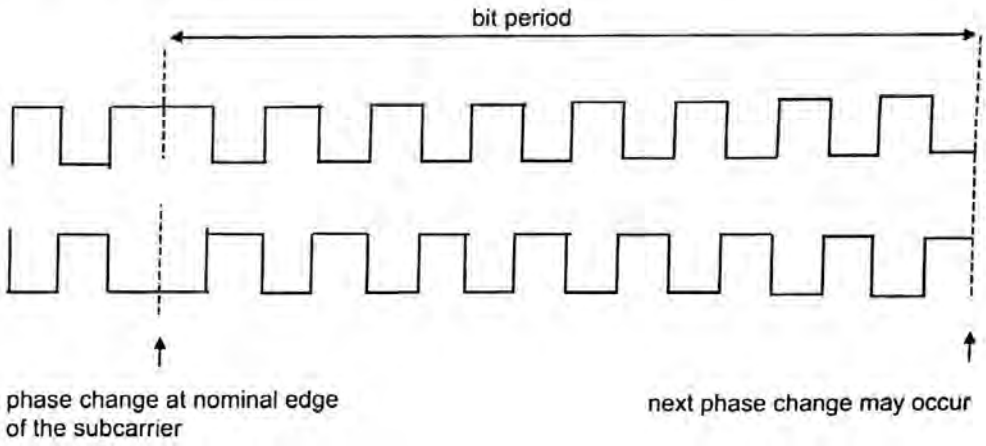


Figure 5 — Allowed phase shifts (PICC internal subcarrier load switching)

9.2.5 Bit representation and coding

Bit coding shall be NRZ-L where a change of logic level shall be denoted by a phase shift (180°) of the subcarrier.

The initial logic level for NRZ-L at the start of a PICC frame shall be established by the following sequence:

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697685
Not for Resale,2008/5/7 17:48:7 GMTonse with ISO

IPR2025-01234
Apple EX1033 Page 57

— After any command from the PCD a guard time TR0 shall apply in which the PICC shall not generate a subcarrier. TR0 shall be greater than 64/*fs*.

— The PICC shall then generate a subcarrier with no phase transition for a synchronization time TR1. This establishes a subcarrier phase reference Ø0. TR1 shall be greater than 80/*fs*.

— This initial phase state Ø0 of the subcarrier shall be defined as logic "1" so that the first phase transition represents a change from logic "1" to logic "0".


— Subsequently the logic level is defined according to the subcarrier phase reference:

Ø0: represents logic "1"

Ø0 + 180°: represents logic "0".

10 PICC minimal coupling zone

The PICC coupling antenna may have any form and location but shall encircle the zone shown in figure 6.

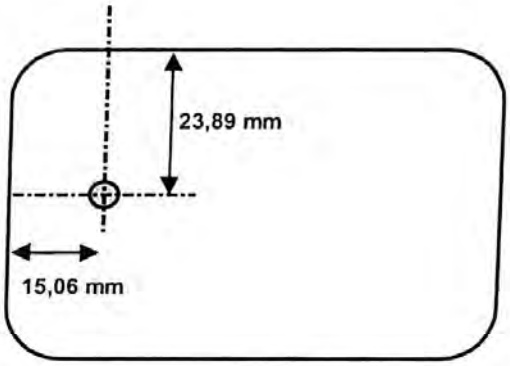

Upper and left edges are defined in ISO/IEC 7816-2. The shaded area is the zone of diameter 5,0 mm.

Figure 6 — PICC minimal coupling zone

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 58

Annex A
(informative)

Compatibility with other card standards

This part of ISO/IEC 14443 does not preclude the addition of other existing card standards on the PICC, such as those listed as follows:

ISO/IEC 7811 (all parts), *Identification cards – Recording technique*

ISO/IEC 7812 (all parts), *Identification cards – Identification of issuers*

ISO/IEC 7813, *Identification cards – Financial transaction cards*

ISO/IEC 7816 (all parts), *Identification cards – Integrated circuit(s) cards with contacts*

ISO/IEC 10536 (all parts), *Identification cards – Contactless integrated circuit(s) cards – Close-coupled cards*

ISO/IEC 15693 (all parts), *Identification cards – Contactless integrated circuit(s) cards – Vicinity cards*

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:7 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 59

ICS 35.240.15
Price based on 11 pages

© ISO/IEC 2001 – All rights reserved

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:7 GMTense with ISO

INTERNATIONAL STANDARD

ISO/IEC 14443-2

First edition
2001-06-28

AMENDMENT 1
2005-06-01

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 2: Radio frequency power and signal interface

AMENDMENT 1: Bit rates of *fc*/64, *fc*/32 and *fc*/16

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 2: Interface radio fréquence et des signaux de communication

AMENDEMENT 1: Débits binaires de fc/64, fc/32 et fc/16

Reference number
ISO/IEC 14443-2:2001/Amd.1:2005(E)

© ISO/IEC 2005

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:6 GMTense with ISO

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2005

All rights reserved Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2005 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 0169785
Not for Resale 2006/3/7 17:48:6 GMTense with ISO

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO/IEC 14443-2:2001 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification.*

© ISO/IEC 2005 All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:6 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 63

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:6 GMTense with ISO

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 2:
Radio frequency power and signal interface

AMENDMENT 1: Bit rates of *fc*/64, *fc*/32 and *fc*/16

Page 3, clause 7

Replace last sentence with the following.

"Figures 1 and Amd.1-1 illustrate the concepts described in the following clauses."

Page 4, clause 7

Replace figure 1 with the following:

"

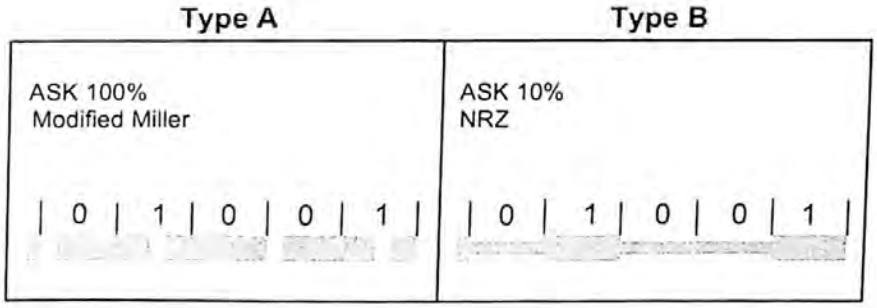


Figure 1 — Example PCD to PICC communication signals for Type A and Type B interfaces

"

Copyright International Organization for Standardization © ISO/IEC 2005 All rights reserved
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697685
Not for Resale 2008/5/7 17:48:6 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 65

Page 4, clause 7

Add the following new figure after figure 1:

"

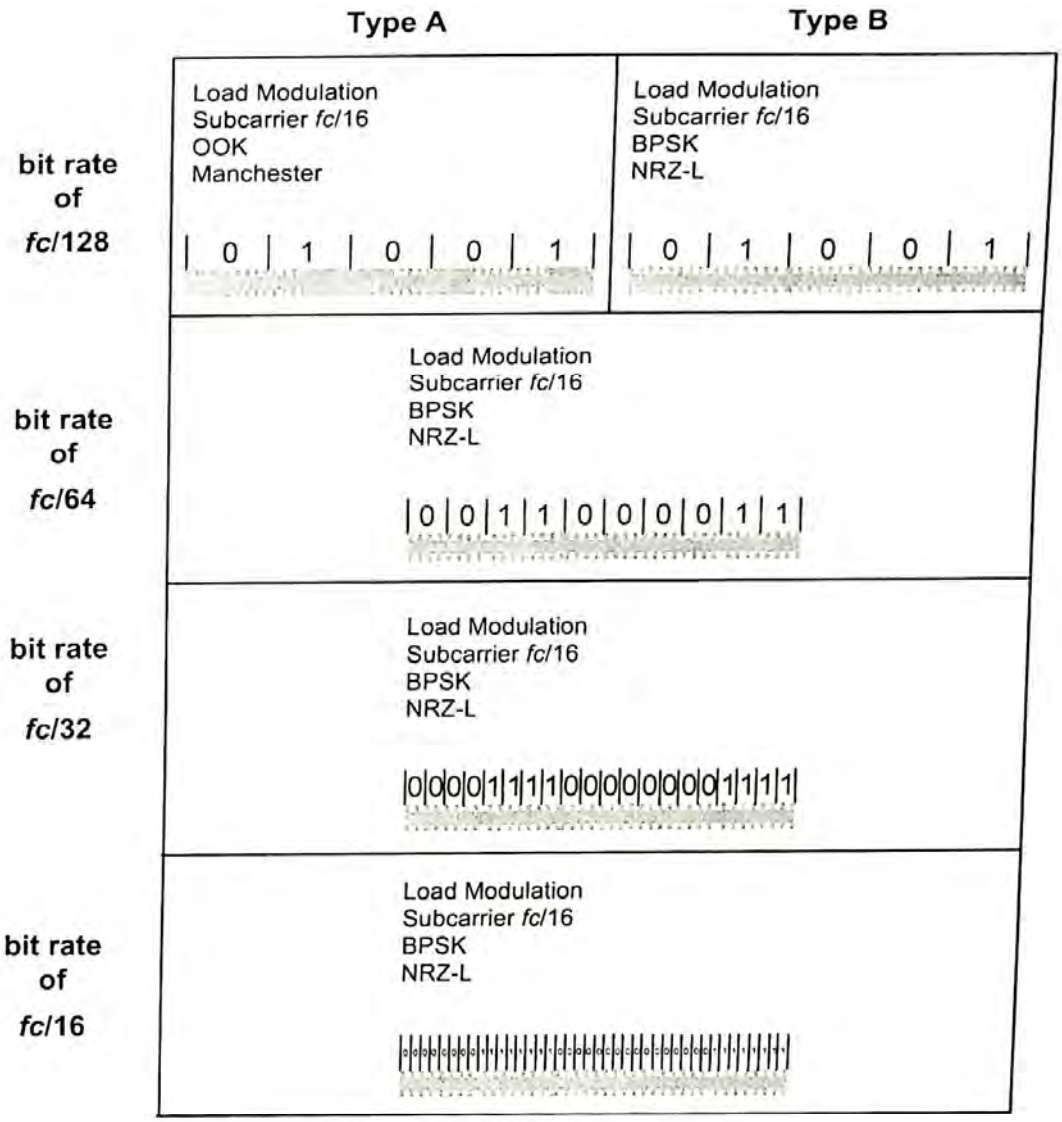


Figure Amd.1-1 — Example PICC to PCD communication signals for Type A and Type B interfaces

"

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2005 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:6 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 66

Page 4, subclause 8.1.1

Add the following text at the end of the subclause:

"The bit rate for the transmission after initialization and anticollision shall be one of the following:

— *fc*/128 (~106 kbit/s),

— *fc*/64 (~212 kbit/s),

— *fc*/32 (~424 kbit/s),

— *fc*/16 (~847 kbit/s)."

Page 4, subclause 8.1.2

Insert new subclause 8.1.2.1 with the following title and move all existing text and figures of subclause 8.1.2 into this new subclause 8.1.2.1:

"**8.1.2.1 Modulation for a bit rate of *fc*/128**"

Page 5, subclause 8.1.2 that has been renumbered to 8.1.2.1

Replace the title of figure 2 with the following: "**Pause for a bit rate of *fc*/128**"

Page 6, subclause 8.1.2 that has been renumbered to 8.1.2.1

Delete the NOTE in figure 3 and replace the title of figure 3 with the following: "**Definition of "End of Pause" for a bit rate of *fc*/128**"

Page 6, subclause 8.1.2

Insert the following new subclause 8.1.2.2 after subclause 8.1.2.1:

"**8.1.2.2 Modulation for bit rates of *fc*/64, *fc*/32 and *fc*/16**

Communication from PCD to PICC for bit rates of *fc*/64 (~212 kbit/s), *fc*/32 (~424 kbit/s) and *fc*/16 (~847 kbit/s) shall use the modulation principle of ASK of the RF operating field to create a pause as shown in figure Amd.1-2.

The envelope of the PCD field shall decrease monotonically to less than 60% of its initial value. This envelope shall comply with figure Amd.1-2.

Copyright International Organization for Standardization © ISO/IEC 2005 All rights reserved
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697585
Not for Resale,2008/5/7 17:48:6 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 67

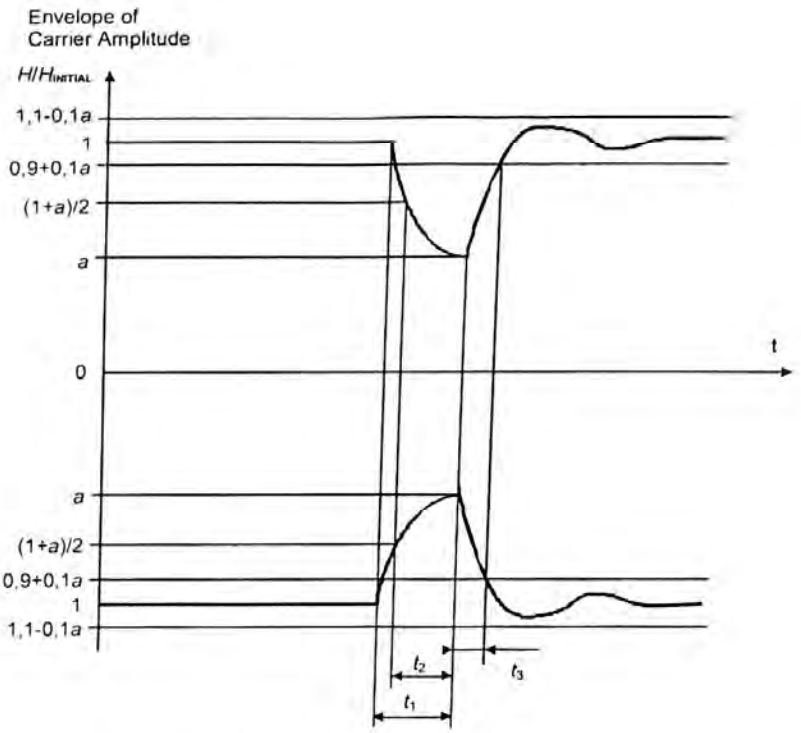


Figure Amd.1-2 — Pause for bit rates of *fc*/64, *fc*/32 and *fc*/16

Overshoots shall remain within ± 0,1 x (1-*a*) of $H_{INITIAL}$.

The parameter *a* in figure Amd.1-2 shall be between 0 and 0,6 for bit rates of *fc*/64, *fc*/32 and *fc*/16.

The parameters t_1, t_2 and t_3 are specified in table1.

Table 1 — Modulation timing

Timing parameter	Bit rate					
	fc/64		*fc*/32		*fc*/16	
	Min	Max	Min	Max	Min	Max
t_1	15/fc	20/fc	8/fc	10/fc	4/fc	5/fc
t_2	8/fc	t_1	4/fc	t_1	2/fc	t_1
t_3	0	12/fc	0	10/fc	0	8/fc

"

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2005 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01627985
Not for Resale,2006/5/7 17:48:6 GMTense with ISO

Page 6, subclause 8.1.3

Add the following text, figure and table after definition of sequence Z (after fourth line):

"Figure Amd.1-3, together with the timing parameters in table 2, illustrates sequences X, Y and Z.

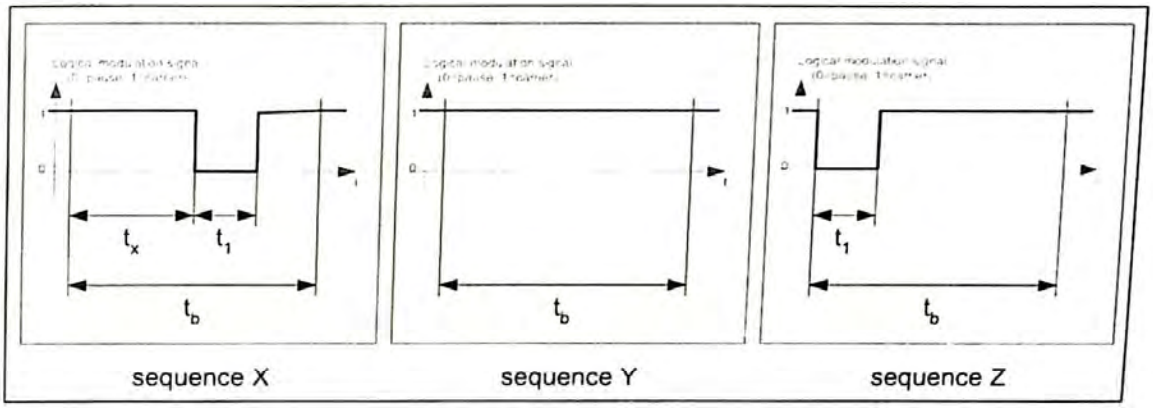


Figure Amd.1-3 — Signal shapes for sequences

Table 2 — Parameters for sequences

Parameter	Bit rate			
	fc/128	*fc*/64	*fc*/32	*fc*/16
t_b	128/*fc*	64/*fc*	32/*fc*	16/*fc*
t_x	64/*fc*	32/*fc*	16/*fc*	8/*fc*
t_1	see t_1 of figure 2	see t_1 of figure Amd.1-2		

"

Page 7, subclause 8.2.1

Add the following text at the end of the subclause:

"The bit rate for the transmission after initialization and anticollision shall be one of the following:

— *fc*/128 (~106 kbit/s),

— *fc*/64 (~212 kbit/s),

— *fc*/32 (~424 kbit/s),

— *fc*/16 (~847 kbit/s)."

Page 7, subclause 8.2.4

Replace the last sentence of the subclause with the following:

"At the bit rate of *fc*/128 the subcarrier is modulated using OOK with the sequences defined in 8.2.5.1. At bit rates of *fc*/64, *fc*/32 and *fc*/16 the subcarrier is modulated using BPSK with the sequences defined in 8.2.5.2."

Copyright International Organization for Standardization © ISO/IEC 2005 All rights reserved
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008-5-7 17:48:6 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 69

Page 7, subclause 8.2.5

Insert new subclause 8.2.5.1 with the following title and move all existing text of subclause 8.2.5 into this new subclause 8.2.5.1:

"8.2.5.1 Bit representation and coding for a bit rate of *fc*/128"

Page 7, subclause 8.2.5

Insert the following new subclause 8.2.5.2 after subclause 8.2.5.1:

"8.2.5.2 Bit representation and coding for bit rates of *fc*/64, *fc*/32 and *fc*/16

Bit coding shall be NRZ-L with the following definitions:

— logic "1": the carrier shall be modulated with the subcarrier for one bit duration,

— logic "0": the carrier shall be modulated with the inverted subcarrier for one bit duration,

— start of communication: burst of 32 subcarrier cycles (phase as logic "1") followed by inverted subcarrier for one bit duration (phase as logic "0"),

— end of communication: the carrier is not modulated with the subcarrier for one bit duration,

— no information: the carrier is not modulated with the subcarrier."

Page 8, subclause 9.1.1

Add the following text between the first and second sentences of the subclause:

"The bit rate for the transmission after initialization and anticollision shall be one of the following:

— *fc*/128 (~106 kbit/s),

— *fc*/64 (~212 kbit/s),

— *fc*/32 (~424 kbit/s),

— *fc*/16 (~847 kbit/s)."

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2005 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:6 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 70

Page 8, subclause 9.1.2

Replace the table in figure 4 with the following table:

"

Table 3 — Parameters for Type B modulation waveform

Parameter	Bit rate			
	fc/128	*fc*/64	*fc*/32	*fc*/16
bit duration	~9,44 µs	~4,72 µs	~2,36 µs	~1,18 µs
$t_{f,\,max}$	2 µs	2 µs	1 µs	0,8 µs
$t_{r,\,max}$	2 µs	2 µs	1 µs	0,8 µs
y	0,1(*a*-*b*)	0,1(*a*-*b*)	0,1(*a*-*b*)	0,1(*a*-*b*)
$h_{f,\,max}$, $h_{r,\,max}$	0,1(*a*-*b*)	0,1(*a*-*b*)	0,1(*a*-*b*)	0,1(*a*-*b*)

"

Page 9, subclause 9.2.1

Add the following text at the end of the subclause:

"The bit rate for the transmission after initialization and anticollision shall be one of the following:

— *fc*/128 (~106 kbit/s),

— *fc*/64 (~212 kbit/s),

— *fc*/32 (~424 kbit/s),

— *fc*/16 (~847 kbit/s)."

Page 9, subclause 9.2.3

Replace the first paragraph of the subclause with the following:

"The frequency *fs* of the subcarrier shall be *fc*/16 (~847 kHz). Consequently, during initialization and anticollision, one bit period is equivalent to 8 periods of the subcarrier. After initialization and anticollision, the number of subcarrier periods is determined by the bit rate."

Page 9, subclause 9.2.4

Delete figure 5 and replace the text with the following:

"The subcarrier shall be BPSK modulated. Phase shifts shall only occur at nominal positions of rising or falling edges of the subcarrier."

Page 10, Clause 10

In the first sentence, replace "figure 6" with "figure 5"

In the figure title, replace "**Figure 6**" with "**Figure 5**".

© ISO/IEC 2005 All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:6 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 71

ICS 35.240.15

Price based on 7 pages

© ISO/IEC 2005 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to:PENN STATE UNIVERSITY (DA), 01697585
Not for Resale,2008/5/7 17:48:6 GMTense with ISO

INTERNATIONAL STANDARD ISO/IEC 14443-2:2001/Amd.1:2005
TECHNICAL CORRIGENDUM 1

Published 2007-11-01

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 2:
Radio frequency power and signal interface

AMENDMENT 1: Bit rates of fc/64, fc/32 and fc/16

TECHNICAL CORRIGENDUM 1

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 2: Interface radiofréquence et des signaux de communication

AMENDEMENT 1: Débit binaires de fc/64, fc/32 et fc/16

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to ISO/IEC 14443-2:2001/Amd.1:2005 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

ICS 35.240.15 **Ref. No. ISO/IEC 14443-2:2001/Amd.1:2005/Cor.1:2007(E)**

© ISO/IEC 2007 – All rights reserved

Copyright International Organization for Standardization Provided by IHS under license with ISO No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985 Not for Resale 2008/5/7 17:48:4 GMTense with ISO

Page 4, Subclause 8.1.2.2

Replace the sentence:

"The parameter *a* in figure Amd. 1-2 shall be between 0 and 0,6 for bit rates of *fc*/64, *fc*/32 and *fc*/16."

with the following:

"The parameter *a* in figure Amd. 1-2 is specified in table C1 for bit rates of *fc*/64, *fc*/32 and *fc*/16.

Table C1 — Parameter a

Parameter	Bit rate					
	fc/64		*fc*/32		*fc*/16	
	Min	Max	Min	Max	Min	Max
a	0	0,2	0	0,35	0	0,6

"

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2007 – All rights reserved
Sold to PENN STATE UNIVERSITY (DAL 01697985
Not for Resale,2008/5/7 17:48:4 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 74

INTERNATIONAL STANDARD

ISO/IEC 14443-3

First edition
2001-02-01

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 3: Initialization and anticollision

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 3: Initialisation et anticollision

Reference number
ISO/IEC 14443-3:2001(E)

© ISO/IEC 2001

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:2 GMT-5 with ISO

© ISO/IEC 2001 – All rights reserved

Contents

Page

Foreword v

Introduction vi

1 Scope 1

2 Normative references 1

3 Terms and definitions 2

4 Symbols and abbreviated terms 3

5 Polling 5

6 Type A – Initialization and anticollision 5
6.1 Frame format and timing 5
6.1.1 Frame delay time 6
6.1.2 Frame delay time PCD to PICC 6
6.1.3 Frame delay time PICC to PCD 6
6.1.4 Request Guard Time 7
6.1.5 Frame formats 7
6.1.6 CRC_A 9
6.2 PICC states 9
6.2.1 POWER-OFF State 10
6.2.2 IDLE State 11
6.2.3 READY State 11
6.2.4 ACTIVE State 11
6.2.5 HALT State 11
6.2.6 READY* State 11
6.2.7 ACTIVE* State 12
6.3 Command set 12
6.3.1 REQA and WUPA Commands 12
6.3.2 ANTICOLLISION and SELECT Commands 13
6.3.3 HLTA Command 13
6.4 Select sequence 13
6.4.1 Select sequence flowchart 14
6.4.2 ATQA - Answer To Request 14
6.4.3 Anticollision and Select 16
6.4.4 UID contents and cascade levels 19

7 Type B – Initialization and anticollision 20
7.1 Character, frame format and timing 20
7.1.1 Character transmission format 20
7.1.2 Character separation 21
7.1.3 Frame format 21
7.1.4 SOF 21
7.1.5 EOF 22
7.1.6 Timing before the PICC SOF 22
7.1.7 Timing before the PCD SOF 22
7.2 CRC_B 23
7.3 Anticollision sequence 23
7.4 PICC states description 24
7.4.1 State transition diagram 25
7.4.2 General statement for state description and transitions 26
7.4.3 POWER-OFF State 26
7.4.4 IDLE State 26

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 77

7.4.5 READY-REQUESTED sub-state 26
7.4.6 READY-DECLARED sub-state 27
7.4.7 ACTIVE State 27
7.4.8 HALT State 27
7.5 Command set 28
7.6 Anticollision response rules 28
7.7 REQB/WUPB Command 28
7.7.1 REQB/WUPB Command format 28
7.7.2 Coding of Anticollision Prefix byte APf 29
7.7.3 Coding of AFI 29
7.7.4 Coding of PARAM 29
7.8 Slot-MARKER Command 30
7.8.1 Slot-MARKER Command format 30
7.8.2 Coding of Anticollision Prefix byte APn 30
7.9 ATQB Response 31
7.9.1 ATQB Response format 31
7.9.2 PUPI (Pseudo-Unique PICC Identifier) 31
7.9.3 Application Data 31
7.9.4 Protocol Info 32
7.10 ATTRIB Command 33
7.10.1 ATTRIB Command format 33
7.10.2 Identifier 34
7.10.3 Coding of Param 1 34
7.10.4 Coding of Param 2 35
7.10.5 Coding of Param 3 35
7.10.6 Coding of Param 4 36
7.10.7 Higher layer INF 36
7.11 Answer to ATTRIB Command 36
7.12 HLTB Command and Answer 37

Annex A (informative) Communication example Type A 38

Annex B (informative) CRC_A and CRC_B encoding 40

Annex C (informative) Type A timeslot – Initialization and anticollision 44

Annex D (informative) Type B - Example of Anticollision Sequence 47

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMTense with ISO

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 14443-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Identification cards and related devices*.

ISO/IEC 14443 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit(s) cards — Proximity cards*:

— *Part 1: Physical characteristics*

— *Part 2: Radio frequency power and signal interface*

— *Part 3: Initialization and anticollision*

— *Part 4: Transmission protocol*

Annexes A, B, C and D of this part of ISO/IEC 14443 are for information only.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 79

Introduction

ISO/IEC 14443 is one of a series of International Standards describing the parameters for identification cards as defined in ISO/IEC 7810, and the use of such cards for international interchange.

This part of ISO/IEC 14443 describes polling for proximity cards entering the field of a proximity coupling device, the byte format and framing, the initial Request and Answer to Request command content, methods to detect and communicate with one proximity card among several proximity cards (anticollision) and other parameters required to initialize communications between a proximity card and a proximity coupling device. Protocols and commands used by higher layers and by applications and which are used after the initial phase are described in ISO/IEC 14443-4.

ISO/IEC 14443 is intended to allow operation of proximity cards in the presence of other contactless cards conforming to ISO/IEC 10536 and ISO/IEC 15693.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this part of ISO/IEC 14443 may involve the use of patents.

ISO and IEC take no position concerning the evidence, validity and scope of this patent right.

The holders of these patent rights have assured ISO and IEC that they are willing to negotiate licences under reasonable and non discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of patent rights are registered with the ISO and IEC. Information may be obtained from:

Patent holder	Details
CASIO General Manager Intellectuall property Centre Casio Computer Co. Ltd Hamura R & D Center 2-1 Sakae-cho 3Chome Hamura-Shi Tokyo 205-8555 Japan	US Patent 4,810,862 and JP 2564480 "System for judging propriety of use of an integrated circuit card with a card terminal", issued on March 07, 1989 Japan Patent No. 2564480 US Patent No. 4810862 British Patent No. 209092 German Patent No. P 3689089.8 French Patent No. 209092 Swiss Patent No. 209092 Canadian Patent No. 1301891 Netherlands Patent No. 209092 Italian Patent No. 209092 Austrian Patent No. 209092 Australian Patent No. 568457 Belgian Patent No. 209092 Swedish Patent 86109530.5 EPO Patent No. 209092
FRANCE TELECOM Branch Développement Centre National d'Etudes des Télécommunications 38-40 rue de Général Leclerc 92794 Issy-les-Molineaux Cedex 9 France	US Patent US5359323

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008-5-7 17:48:2 GMT+ese with ISO

INNOVOTRON Philippe le Clech Director of International Operations Innovotrol 1 Rue Danton 75006 Paris France	WO 9936877A1 Europe 0 901 670 French Patent App 97.02501 Int Pat App PCT/FR98/00132 Innovatron Electronique / RATP sub clause 7.3, 7.6 and 7.7 French Patent App 98.00383 Int Pat App PCT/FR99/00079 Innovatron Electronique / RATP sub clause 7.3, 7.4.5, 7.6, 7.7, 7.8
MOTOROLA Motorola ESG 207 route de Ferney P O Box 15 1218 Grand-Saconnex Geneva Switzerland	Details not available.
ON-TRACK INNOVATIONS Z.H.R. Industrial Zone P O Box 32 Rosh-Pina 12000 Israel	Patent EP 0 492 569 B1 A system and method for the non-contact transmission of data.
PHILIPS Director Philips Corporate Intellectual Property Koninklijke Philips Electronics N.V. P. O. Box 220 5600 AE Eindhoven The Netherlands	PHO 94.520 EP-PS 066 9591 (BE,CH,DE,DK,ES,FR,GB,IT,NL,SE) AT-PS 401 127 Related to "anticollision" as specified in ISO/IEC 14443-3

The following companies may hold patents relating to this part of ISO/IEC 14443 but have not provided details of the patents or agreed to provide licences.

Patent holder	Details
WAYNE S FOLETTA 4760 Castlewood Drive San Jose, California CA 9512 USA	US 4 650 981
JOHN W HALPERN C/O Vincent M DeLuca Rothwell, Figg, Ernst & Kurz, p.c. 555 Thirteenth Street, N.W. Suite 701 East Tower Washington, D.C. 20004	US Patent No. 4, 661,691
MAGELLAN CORPORATION 8717 Research Drive Irvine CA 92618 USA	WO 89 05549 A

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 14443 may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 81

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 3: Initialization and anticollision

1 Scope

This part of ISO/IEC 14443 describes:

— polling for proximity cards (PICCs) entering the field of a proximity coupling device (PCD);

— the byte format, the frames and timing used during the initial phase of communication between PCDs and PICCs;

— the initial Request and Answer to Request command content;

— methods to detect and communicate with one PICC among several PICCs (anticollision);

— other parameters required to initialize communications between a PICC and PCD;

— optional means to ease and speed up the selection of one PICC among several PICCs based on application criteria.

Protocol and commands used by higher layers and by applications and which are used after the initial phase are described in ISO/IEC 14443-4.

This part of ISO/IEC 14443 is applicable to PICCs of Type A and of Type B (as described in ISO/IEC 14443-2).

NOTE Part of the timing of data communication is defined in ISO/IEC 14443-2.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 14443. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO/IEC 14443 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 7816-3:1997, *Information technology — Identification cards — Integrated circuit(s) cards with contacts — Part 3: Electronic signals and transmission protocols.*

ISO/IEC 7816-5, *Identification cards — Integrated circuit(s) cards with contacts — Part 5: Numbering system and registration procedure for application identifiers.*

ISO/IEC 7816-6:1996/Amd.1:2000, *Identification cards — Integrated circuit(s) cards with contacts — Part 6: Interindustry data elements — Amendment 1: IC manufacturer registration.*

© ISO/IEC 2001 — All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 83

ISO/IEC 13239, *Information technology — Telecommunications and information exchange between systems — High-level data link control (HDLC) procedures.*

ISO/IEC 14443-2, *Identification cards — Contactless integrated circuit(s) cards — Proximity cards — Part 2: Radio frequency power and signal interface.*

ISO/IEC 14443-4, *Identification cards — Contactless integrated circuit(s) cards — Proximity cards — Part 4: Transmission protocol.*

ITU-T X.25, *Interface between Data Terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in the packet mode and connected to public data networks by dedicated circuit.*

ITU-T V.41, *Code-independent error-control system.*

ITU-T V.42, *Error-correcting procedures for DCEs using asynchronous-to-synchronous conversion.*

3 Terms and definitions

For the purposes of this part of ISO/IEC 14443, the terms and definitions given in ISO/IEC 14443-2, ISO/IEC 7816-3 and the following apply.

3.1
anticollision loop
algorithm used to prepare for dialogue between PCD and one or more PICCs out of the total number of PICCs responding to a request command

3.2
bit collision detection protocol
anticollision method for PICCs of Type A, employing collision detection at bit level within a frame

3.3
byte
8 bits of data designated b8 to b1, from the most significant bit (MSB, b8) to the least significant bit (LSB, b1)

3.4
collision
transmission by two PICCs in the same PCD energizing field and during the same time period, such that the PCD is unable to distinguish from which PICC the data originated

3.5
elementary time unit
etu
for this part of ISO/IEC 14443, one etu is defined as 1 etu = 128/*fc* (i.e. 9,4 µs nominal)

3.6
frame
sequence of data bits and optional error detection bits, with frame delimiters at start and end

3.7
higher layer protocol
protocol layer (not described in this part of ISO/IEC 14443) that makes use of the protocol layer defined in this part of ISO/IEC 14443 to transfer information belonging to the application or higher layers of protocol that is not described in this part of ISO/IEC 14443

3.8
timeslot protocol
method whereby a PCD establishes logical channels with one or more PICCs of Type B, which makes use of timeslot allocation for PICC response

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697965
Not for Resale 2008/5/7 17:48:2 GMT+one with ISO

IPR2025-01234
Apple EX1033 Page 84

3.9
request command
command requesting PICC of the appropriate type to respond if they are available for initialization

4 Symbols and abbreviated terms

For the purposes of this part of ISO/IEC 14443, the following abbreviations are used:

ADC	Application Data Coding, Type B
AFI	Application Family Identifier. Card preselection criteria by application, Type B
APf	Anticollision Prefix f, used in REQB/WUPB, Type B
APn	Anticollision Prefix n, used in Slot-MARKER Command, Type B
ATQA	Answer To Request, Type A
ATQB	Answer To Request, Type B
ATTRIB	PICC selection command, Type B
BCC	UID CLn check byte, calculated as exclusive-or over the 4 previous bytes, Type A
CID	Card IDentifier
CLn	Cascade Level n, Type A
CT	Cascade Tag, Type A
CRC_A	Cyclic Redundancy Check error detection code A
CRC_B	Cyclic Redundancy Check error detection code B
E	End of communication, Type A
EGT	Extra Guard Time, Type B
EOF	End Of Frame, Type B
etu	Elementary time unit.
FDT	Frame Delay Time, Type A
fc	Carrier frequency
FO	Frame Option
fs	Subcarrier frequency
FWI	Frame Waiting time Integer
FWT	Frame Waiting Time
HLTA	Halt Command, Type A
HLTB	Halt Command, Type B

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697885
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 85

ID	IDentification number, Type A
INF	INFormation field belonging to higher layer, Type B
LSB	Least Significant Bit
MBL	Maximum Buffer Length, Type B
MBLI	Maximum Buffer Length Index, Type B
MSB	Most Significant Bit
N	Number of anticollision slots or PICC response probability in each slot, Type B
n	Variable integer value as defined in the specific clause
NAD	Node ADdress
NVB	Number of Valid Bits, Type A
P	Odd Parity bit, Type A
PCD	Proximity Coupling Device
PICC	Proximity Card
PUPI	Pseudo-Unique PICC Identifier, Type B
R	Slot number chosen by the PICC during the anticollision sequence, Type B
REQA	Request Command, Type A
REQB	Request Command, Type B
RFU	Reserved for Future ISO/IEC Use
S	Start of communication, Type A
SAK	Select AcKnowledge, Type A
SEL	SELect code, Type A
SELECT	Select Command, Type A
SOF	Start Of Frame, Type B
TR0	Guard Time as defined in ISO/IEC 14443-2, Type B
TR1	Synchronization Time as defined in ISO/IEC 14443-2, Type B
UID	Unique Identifier, Type A
uid*n*	Byte number *n* of Unique IDentifier, $n \geq 0$
WUPA	Wake-UP Command, Type A
WUPB	Wake-UP Command, Type B

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

For the purposes of this part of ISO/IEC 14443, the following notation applies:

— (xxxxx)b Data bit representation;

— 'XY' Hexadecimal notation, equal to XY to the base 16.

5 Polling

In order to detect PICCs which are in the operating field, a PCD shall send repeated Request commands. The PCD shall send REQA and REQB described herein in any sequence and in addition may send other commands as described in Annex C.

When a PICC is exposed to an unmodulated operating field (see ISO/IEC 14443-2) it shall be able to accept a request within 5 ms.

EXAMPLE 1 When a PICC Type A receives any Type B command it shall be able to accept a REQA within 5 ms of unmodulated operating field.

EXAMPLE 2 When a PICC Type B receives any Type A command it shall be able to accept a REQB within 5 ms of unmodulated operating field.

6 Type A – Initialization and anticollision

This section describes the initialization and collision detection protocol applicable for PICCs of Type A.

The PCD shall be designed to detect a collision that occurs when at least two PICCs simultaneously transmit bit patterns with one or more bit positions in which at least two PICCs transmit complementary values. In this case the bit patterns merge and the carrier is modulated with the subcarrier for the whole (100%) bit duration (see ISO/IEC 14443-2).

6.1 Frame format and timing

This section defines the frame format and timing used during communication initialization and anticollision. For bit representation and coding refer to ISO/IEC 14443-2.

Frames shall be transferred in pairs, PCD to PICC followed by PICC to PCD, using the sequence:

— PCD frame:

  — PCD start of communication

  — information and, where required, error detection bits sent by the PCD

  — PCD end of communication

— Frame delay time PCD to PICC

— PICC frame:

  — PICC start of communication

  — information and, where required, error detection bits sent by the PICC

  — PICC end of communication

— Frame delay time PICC to PCD

The frame delay time (FDT) from PCD to PICC overlaps the PCD end of communication.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 87

6.1.1 Frame delay time

The frame delay time FDT is defined as the time between two frames transmitted in opposite directions.

6.1.2 Frame delay time PCD to PICC

This is the time between the end of the last pause transmitted by the PCD and the first modulation edge within the start bit transmitted by the PICC and shall respect the timing defined in Figure 1, where *n* is an integer value.

Table 1 defines values for *n* and FDT depending on the command type and the logic state of the last transmitted data bit in this command.

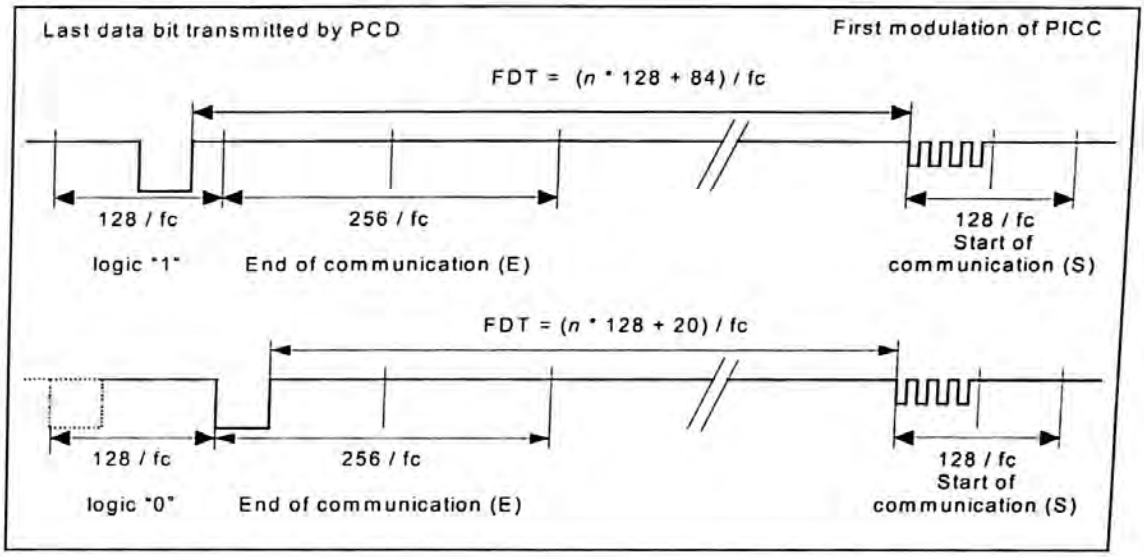


Figure 1 — Frame delay time PCD to PICC

Table 1 — Frame delay time PCD to PICC

Command type	*n* (integer value)	FDT	
		last bit = (1)b	last bit = (0)b
REQA Command WUPA Command ANTICOLLISION Command SELECT Command	9	1236 / *fc*	1172 / *fc*
All other commands	≥ 9	(*n* * 128 + 84) / *fc*	(*n* * 128 + 20) / *fc*

The value *n* = 9 means that all PICCs in the field shall respond in a synchronous way which is needed for anticollision.

For all other commands the PICC shall ensure that the first modulation edge within the start bit is aligned to the bit-grid defined in Figure 1.

6.1.3 Frame delay time PICC to PCD

This is the time between the last modulation transmitted by the PICC and the first pause transmitted by the PCD and shall be at least 1172 / *fc*.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTerse with ISO
© ISO/IEC 2001 – All rights reserved
IPR2025-01234
Apple EX1033 Page 88

6.1.4 Request Guard Time

The Request Guard Time is defined as the minimum time between the start bits of two consecutive REQA commands. It has the value 7000 / *fc*.

6.1.5 Frame formats

The following frame types are defined:

— short frames for commands defined in Table 2;

— standard frames for regular commands;

— bit oriented anticollision frame for anticollision command.

6.1.5.1 Short frame

A short frame is used to initiate communication and consists of, in the following order:

— start of communication;

— 7 data bits transmitted LSB first (for coding see Table 2);

— end of communication.

No parity bit is added.

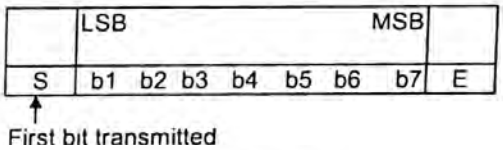


Figure 2 — Short frame

6.1.5.2 Standard frame

Standard frames are used for data exchange and consist of:

— start of communication;

— n * (8 data bits + odd parity bit), with n ≥ 1. The LSB of each byte is transmitted first. Each byte is followed by an odd parity bit. The parity bit P is set such that the number of 1s is odd in (b1 to b8, P);

— end of communication.

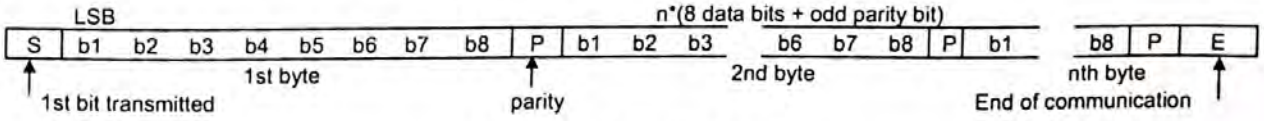


Figure 3 — Standard Frame

6.1.5.3 Bit oriented anticollision frame

A collision is detected when at least two PICCs transmit different bit patterns to the PCD. In this case the carrier is modulated with the subcarrier for the whole bit duration for at least one bit.

Copyright International Organization for Standardization © ISO/IEC 2001 — All rights reserved
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTerse with ISO

IPR2025-01234
Apple EX1033 Page 89

Bit oriented anticollision frames shall only be used during bit frame anticollision loops and are standard frames with a length of 7 bytes, split into two parts:

— part 1 for transmission from PCD to PICC;

— part 2 for transmission from PICC to PCD.

For the length of part 1 and part 2, the following rules shall apply:

— rule 1: The sum of data bits shall be 56;

— rule 2: The minimum length of part 1 shall be 16 data bits;

— rule 3: The maximum length of part 1 shall be 55 data bits.

Consequently, the minimum length of part 2 shall be 1 data bit and the maximum length shall be 40 data bits.

Since the split can occur at any bit position within a byte, two cases are defined:

— case FULL BYTE: Split after a complete byte. A parity bit is added after the last data bit of part 1;

— case SPLIT BYTE: Split within a byte. No parity bit is added after the last data bit of part 1.

The following examples for case FULL BYTE and case SPLIT BYTE define the bit organization and order of bit transmission.

NOTE These examples include proper values for NVB and BCC.

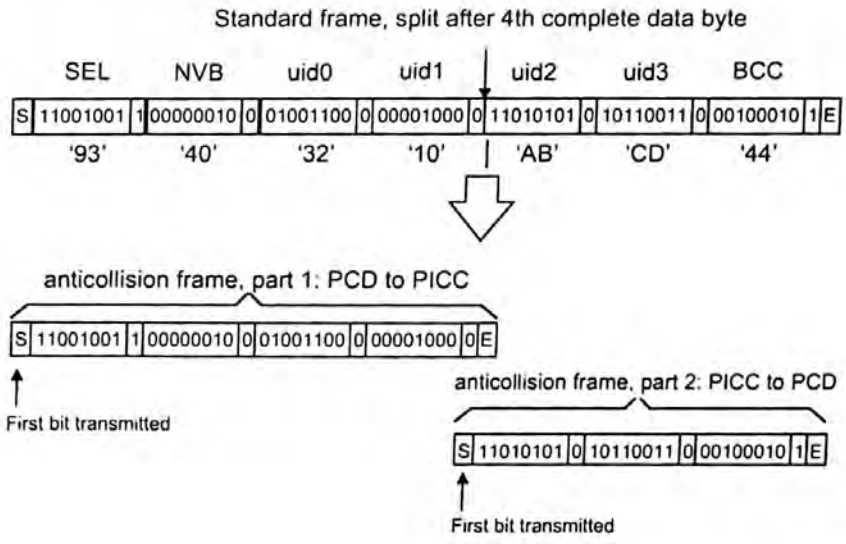


Figure 4 — Bit organization and transmission of bit oriented anticollision frame, case FULL BYTE

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMT+se with ISO

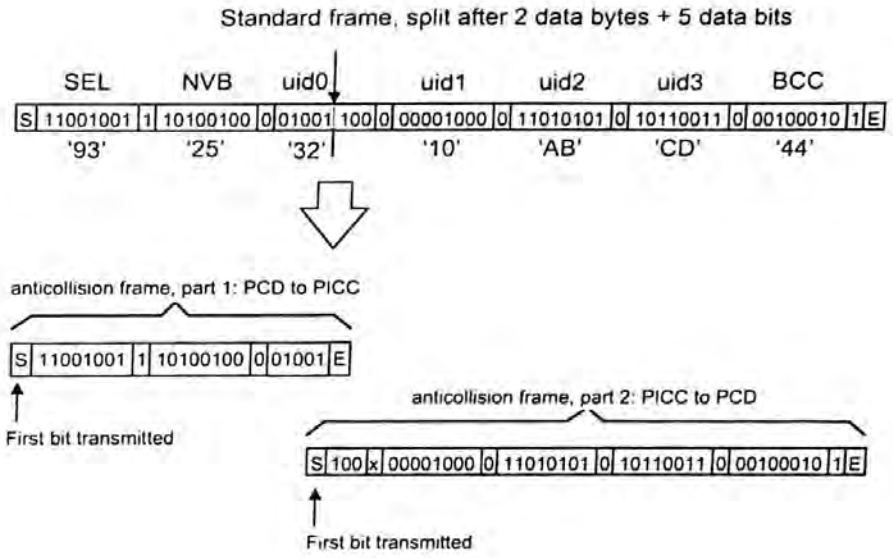


Figure 5 — Bit organization and transmission of bit oriented anticollision frame, case SPLIT BYTE

For a SPLIT BYTE, the first parity bit of part 2 shall be ignored by the PCD.

6.1.6 CRC_A

The frame CRC_A is a function of k data bits, which consist of all the data bits in the frame, excluding parity bits, S and E, and the CRC_A itself. Since data is encoded in bytes, the number of bits k is a multiple of 8. For error checking, the two CRC_A bytes are sent in the standard frame, after the bytes and before the E. The CRC_A is as defined in ISO/IEC 13239, but the initial register content shall be '6363' and the register content shall not be inverted after calculation.

For an example refer to annex B.

6.2 PICC states

The following sections provide descriptions of the states for a PICC of Type A specific to the bit collision detection protocol.

The following state diagram takes all possible state transitions caused by commands of this part of ISO/IEC 14443 into account.

PICCs react to valid received frames only. No response is sent when transmission errors are detected.

The following symbols apply for the state diagram shown in Figure 6 below.

AC	ANTICOLLISION Command (matched UID)
nAC	ANTICOLLISION Command (not matched UID)
SELECT	SELECT Command (matched UID)
nSELECT	SELECT Command (not matched UID)

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 91

DESELECT	DESELECT Command, defined in ISO/IEC 14443-4
Error	transmission error detected

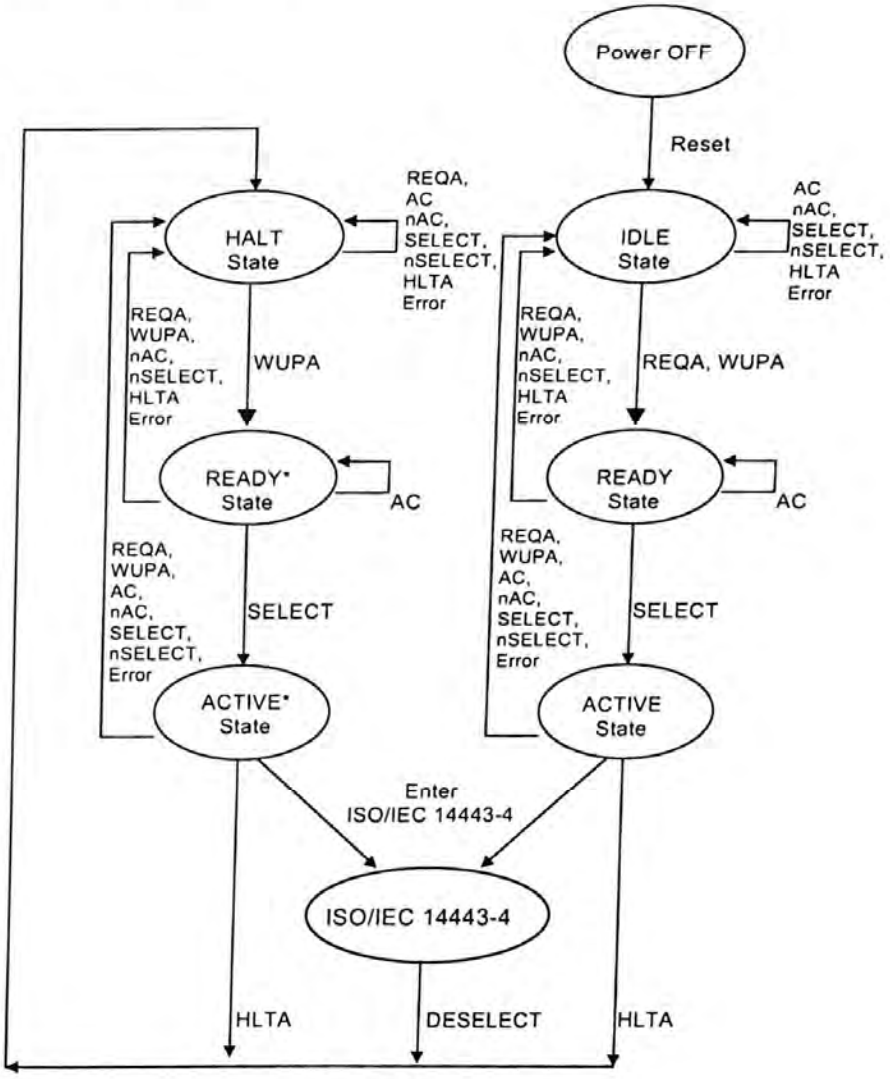


Figure 6 — PICC Type A state diagram

PICCs being compliant with ISO/IEC 14443-3 but not using ISO/IEC 14443-4 may leave the ACTIVE or ACTIVE* State by proprietary commands.

6.2.1 POWER-OFF State

Description:

In the POWER-OFF State, the PICC is not powered due to a lack of carrier energy.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 92

State exit conditions and transitions:

If the PICC is in an energizing magnetic field greater than H_{min} (see ISO/IEC 14443-2), it shall enter its IDLE State within a delay not greater than defined in clause 5.

6.2.2 IDLE State

Description:

In the IDLE State, the PICC is powered. It listens for commands and shall recognize REQA and WUPA Commands.

State exit conditions and transitions:

The PICC enters the READY State after it has received a valid REQA or WUPA Command and transmitted its ATQA.

6.2.3 READY State

Description:

In the READY State, either the bit frame anticollision or a proprietary anticollision method can be applied. Cascade levels are handled inside this state to get the complete UID.

State exit conditions and transitions:

The PICC enters the ACTIVE State when it is selected with its complete UID.

6.2.4 ACTIVE State

Description:

In the ACTIVE State, the PICC listens to any higher layer message.

State exit conditions and transitions:

The PICC enters the HALT State when a valid HLTA Command is received.

NOTE In the higher layer protocol, specific commands may be defined to return the PICC to its HALT State.

6.2.5 HALT State

Description:

In the HALT State, the PICC shall respond only to a WUPA Command.

State exit conditions and transitions:

The PICC enters the READY* State after it has received a valid WUPA Command and transmitted its ATQA.

6.2.6 READY* State

Description:

The READY* State is similar to the READY State, either the bit frame anticollision or a proprietary anticollision method can be applied. Cascade levels are handled inside this state to get complete UID.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 93

State exit conditions and transitions:

The PICC enters the ACTIVE* State when it is selected with its complete UID.

6.2.7 ACTIVE* State

Description:

The ACTIVE* State is similar to the ACTIVE State, the PICC is selected and listens to any higher layer message.

State exit conditions and transitions:

The PICC enters the HALT State when a valid HLTA Command is received.

6.3 Command set

The commands used by the PCD to manage communication with several PICCs are:

— REQA;

— WUPA;

— ANTICOLLISION;

— SELECT;

— HLTA.

The commands use the byte and frame formats described above.

6.3.1 REQA and WUPA Commands

The REQA and WUPA Commands are sent by the PCD to probe the field for PICCs of Type A. They are transmitted within a short frame.

See Figure 6 to check in which cases PICC actually have to answer to these respective commands.

Particularly the WUPA Command is sent by the PCD to put PICCs which have entered the HALT State back into the READY* State. They shall then participate in further anticollision and selection procedures.

Table 2 shows the coding of REQA and WUPA Commands which use the Short frame format.

Table 2 — Coding of Short Frame

b7	b6	b5	b4	b3	b2	b1	Meaning
0	1	0	0	1	1	0	'26' = REQA
1	0	1	0	0	1	0	'52' = WUPA
0	1	1	0	1	0	1	'35' = Optional timeslot method, see Annex C
1	0	0	x	x	x	x	'40' to '4F' = Proprietary
1	1	1	1	x	x	x	'78' to '7F' = Proprietary
all other values							RFU

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 94

6.3.2 ANTICOLLISION and SELECT Commands

These commands are used during an anticollision loop (see Figure 4 and 5). The ANTICOLLISION and SELECT Commands consist of:

— select code SEL (1 byte);

— number of valid bits NVB (1 byte, for coding see Table 7);

— 0 to 40 data bits of UID CLn according to the value of NVB.

SEL specifies the cascade level CL*n*.

The ANTICOLLISION Command is transmitted within bit oriented anticollision frame.

The SELECT Command is transmitted within standard frame

As long as NVB does not specify 40 valid bits, the command is called ANTICOLLISION Command, where the PICC remains in READY or READY* State.

If NVB specifies 40 data bits of UID CLn (NVB='70'), a CRC_A shall be appended. This command is called SELECT Command.

If the PICC has transmitted the complete UID, it transits from READY State to ACTIVE State or from READY* State to ACTIVE* State and indicates in its SAK response that UID is complete.

Otherwise, the PICC remains in READY or READY* State and the PCD shall initiate a new anticollision loop with increased cascade level.

6.3.3 HLTA Command

The HLTA Command consists of two bytes followed by CRC_A and shall be transmitted within Standard Frame.

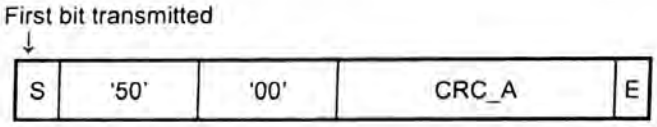


Figure 7 — Standard frame containing HLTA Command

If the PICC responds with any modulation during a period of 1 ms after the end of the frame containing the HLTA Command, this response shall be interpreted as 'not acknowledge'.

6.4 Select sequence

The purpose of the select sequence is to get the UID from one PICC and to select this PICC for further communication.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 95

6.4.1 Select sequence flowchart

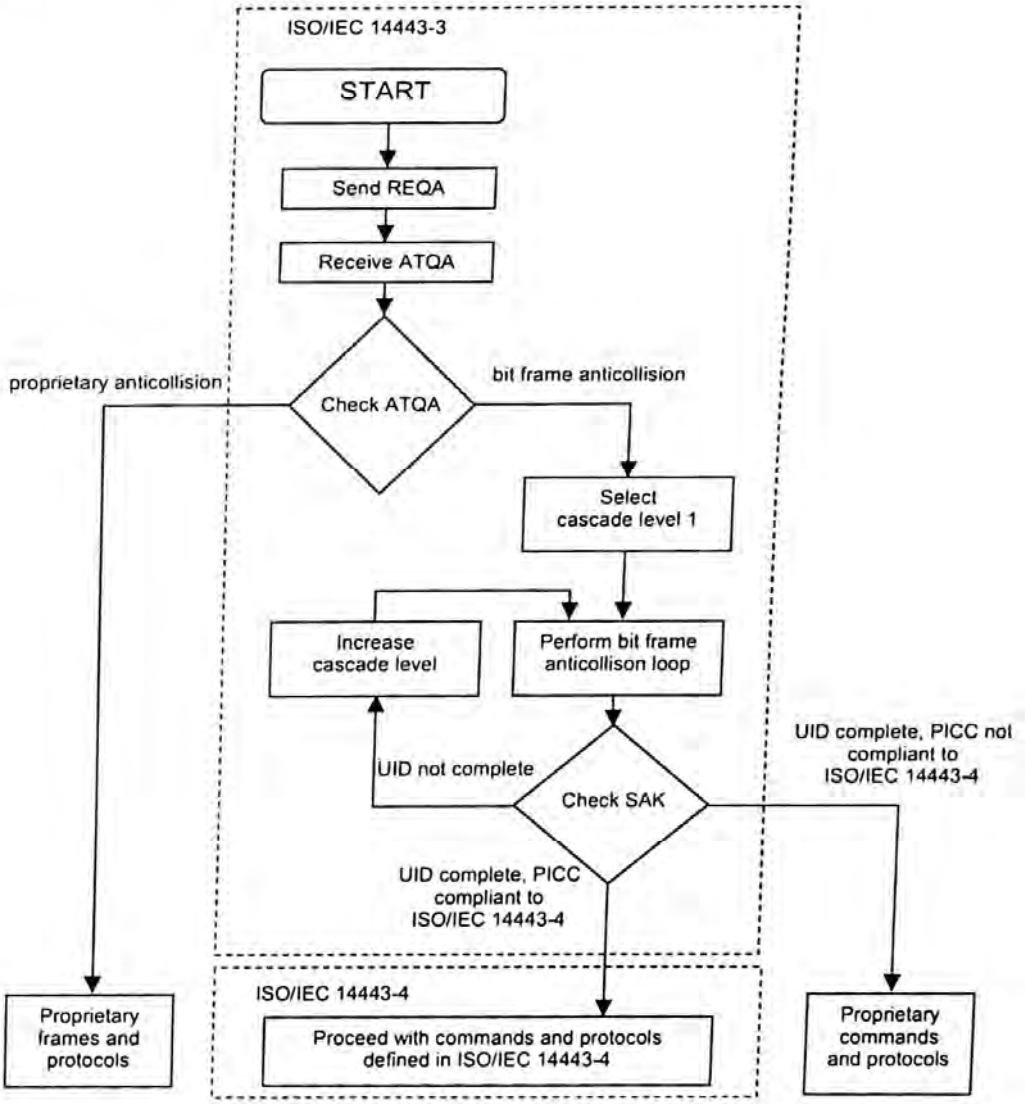


Figure 8 — Initialization and anticollision flowchart for PCD

6.4.2 ATQA - Answer To Request

After a REQA Command is transmitted by the PCD, all PICCs in the IDLE State shall respond synchronously with ATQA.

After a WUPA Command is transmitted by the PCD, all PICCs in the IDLE or HALT State shall respond synchronously with ATQA.

The PCD shall detect any collision that may occur when multiple PICCs respond.

An example is given in annex A.

44
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697685
Not for Resale,2008/5/7 17:48:2 GMTense with ISO
IPR2025-01234
Apple EX1033 Page 96

6.4.2.1 Coding of ATQA

Table 3 — Coding of ATQA

MSB LSB

b16	b15	b14	b13	b12	b11	b10	b9	b8	b7	b6	b5	b4	b3	b2	b1
RFU				Proprietary coding				UID size bit frame		RFU	Bit frame anticollision				

All RFU bits shall be set to 0.

6.4.2.2 Coding rules for bit frame anticollision

— Rule 1: Bits b7 and b8 code the UID size (single, double or triple, see Table 4).

— Rule 2: One out of the five bits b1, b2, b3, b4 or b5 shall be set to (1)b to indicate bit frame anticollision (see Table 5)

NOTE Bit 9 to bit 12 indicate additional and proprietary methods

Table 4 — Coding of b7, b8 for bit frame anticollision

b8	b7	Meaning
0	0	UID size: single
0	1	UID size: double
1	0	UID size: triple
1	1	RFU

Table 5 — Coding of b1 - b5 for bit frame anticollision

b5	b4	b3	b2	b1	Meaning
1	0	0	0	0	bit frame anticollision
0	1	0	0	0	bit frame anticollision
0	0	1	0	0	bit frame anticollision
0	0	0	1	0	bit frame anticollision
0	0	0	0	1	bit frame anticollision

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01897985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 97

6.4.3 Anticollision and Select

6.4.3.1 Anticollision loop within each cascade level

The following algorithm shall apply to the anticollision loop:

Step 1	The PCD shall assign SEL with the code for the selected anticollision type and cascade level.
Step 2	The PCD shall assign NVB with the value of '20'. NOTE This value defines that the PCD will transmit no part of UID CLn. Consequently this command forces all PICCs in the field to respond with their complete UID CLn.
Step 3	The PCD shall transmit SEL and NVB.
Step 4	All PICCs in the field shall respond with their complete UID CLn.
Step 5	Assuming the PICCs in the field have unique serial numbers, then if more than one PICC responds, a collision occurs. If no collision occurs, steps 6 to 10 shall be skipped.
Step 6	The PCD shall recognize the position of the first collision.
Step 7	The PCD shall assign NVB with a value that specifies the number of valid bits of UID CLn. The valid bits shall be part of the UID CLn that was received before a collision occurred followed by a (0)b or (1)b, decided by the PCD. A typical implementation adds a (1)b.
Step 8	The PCD shall transmit SEL and NVB, followed by the valid bits.
Step 9	Only PICCs of which the part of UID CLn is equal to the valid bits transmitted by the PCD shall transmit their remaining bits of the UID CLn.
Step 10	If further collisions occur, steps 6 to 9 shall be repeated. The maximum number of loops will be 32.
Step 11	If no further collision occurs, the PCD shall assign NVB with the value of '70'. NOTE This value defines that the PCD will transmit the complete UID CLn.
Step 12	The PCD shall transmit SEL and NVB, followed by all 40 bits of UID CLn, followed by CRC_A checksum.
Step 13	The PICC which UID CLn matches the 40 bits shall respond with its SAK.
Step 14	If the UID is complete, the PICC shall transmit SAK with cleared cascade bit and shall transit from READY State to ACTIVE State or from READY* State to ACTIVE* State.
Step 15	The PCD shall check if the cascade bit of SAK is set to decide whether further anticollision loops with increased cascade level shall follow.

If the UID of a PICC is complete and known by the PCD, the PCD may skip step 2 - step 10 to select this PICC without performing the anticollision loop.

NOTE Figure 9 explains steps 1 to 13.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMT+se with ISO

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 98

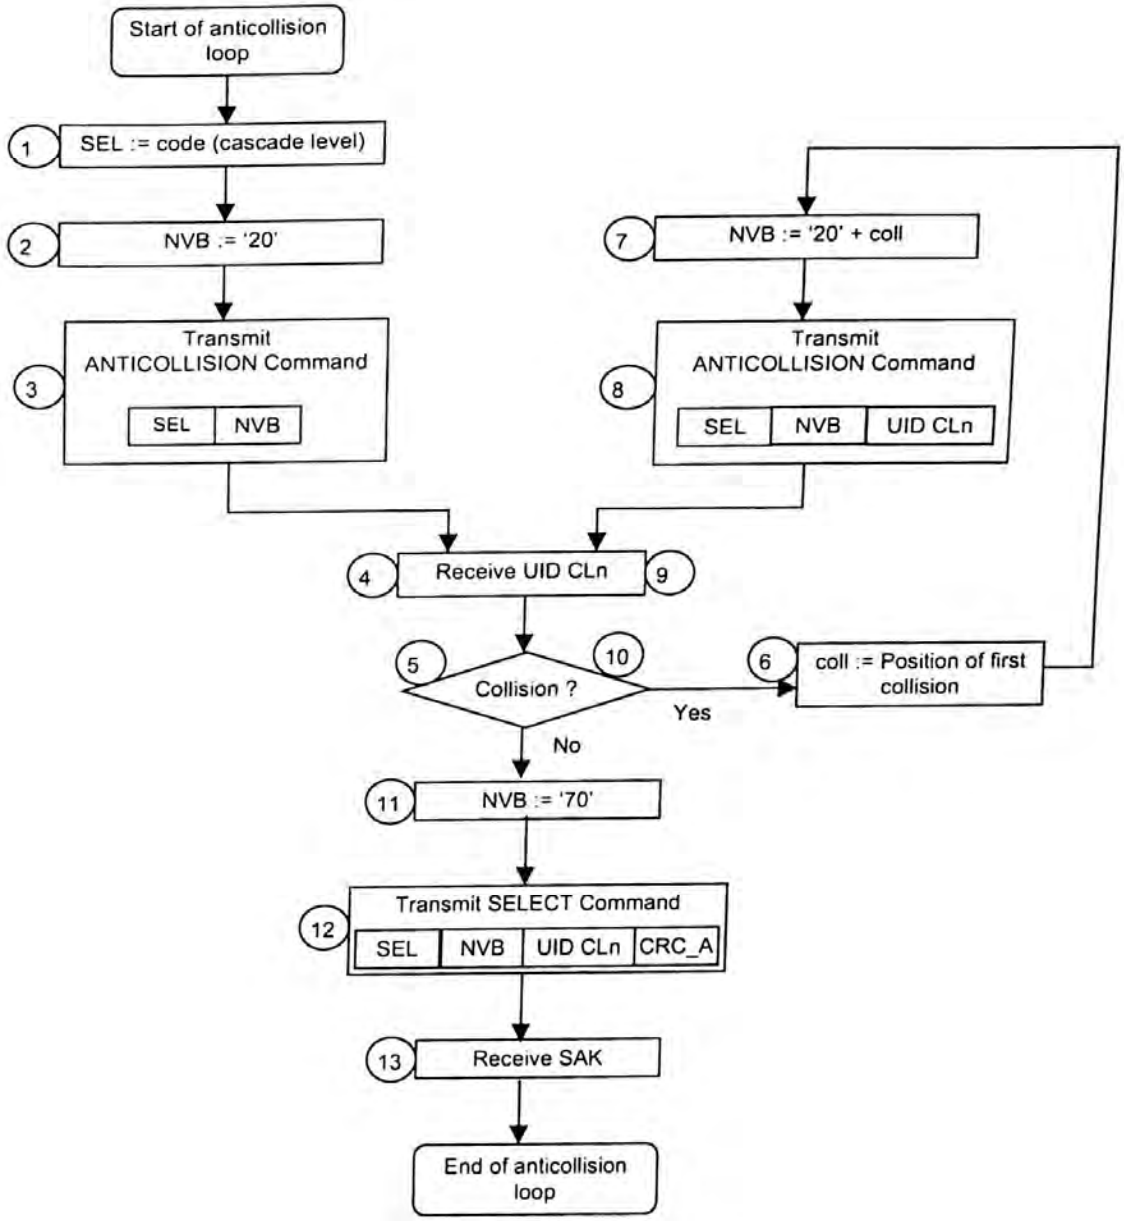


Figure 9 — Anticollision loop, flowchart for PCD

NOTE The circled numbers correspond to the steps of the algorithm.

6.4.3.2 Coding of SEL (Select code)

Length: 1 byte
Possible values: '93', '95', '97'

© ISO/IEC 2001 — All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 99

Table 6 — Coding of SEL

b8	b7	b6	b5	b4	b3	b2	b1	Meaning
1	0	0	1	0	0	1	1	'93': Select cascade level 1
1	0	0	1	0	1	0	1	'95': Select cascade level 2
1	0	0	1	0	1	1	1	'97': Select cascade level 3
1	0	0	1	other values except those here above				RFU

6.4.3.3 Coding of NVB (Number of Valid Bits)

Length: 1 byte

The upper 4 bits are called "Byte count" and specify the integer part of the number of all valid data bits transmitted by the PCD (including SEL and NVB) divided by 8. Consequently, the minimum value of "Byte count" is 2 and the maximum value is 7.

The lower 4 bits are called "bit count" and specify the number of all valid data bits transmitted by the PCD (including SEL and NVB) modulo 8.

Table 7 — Coding of NVB

b8	b7	b6	b5	Meaning
0	0	1	0	Byte count = 2
0	0	1	1	Byte count = 3
0	1	0	0	Byte count = 4
0	1	0	1	Byte count = 5
0	1	1	0	Byte count = 6
0	1	1	1	Byte count = 7

b4	b3	b2	b1	Meaning
0	0	0	0	bit count = 0
0	0	0	1	bit count = 1
0	0	1	0	bit count = 2
0	0	1	1	bit count = 3
0	1	0	0	bit count = 4
0	1	0	1	bit count = 5
0	1	1	0	bit count = 6
0	1	1	1	bit count = 7

6.4.3.4 Coding of SAK (Select acknowledge)

SAK is transmitted by the PICC when NVB has specified 40 valid data bits and when all these data bits match with UID CLn.

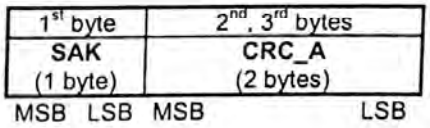


Figure 10 — Select acknowledge (SAK)

The coding of bits b3 (cascade bit) and b6 is given in Table 8.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMT+se with ISO
© ISO/IEC 2001 – All rights reserved
IPR2025-01234
Apple EX1033 Page 100

Table 8 — Coding of SAK

b8	b7	b6	b5	b4	b3	b2	b1	Meaning
x	x	x	x	x	1	x	x	Cascade bit set: UID not complete
x	x	1	x	x	0	x	x	UID complete, PICC compliant with ISO/IEC 14443-4
x	x	0	x	x	0	x	x	UID complete, PICC not compliant with ISO/IEC 14443-4

6.4.4 UID contents and cascade levels

The UID consists of 4, 7 or 10 UID bytes. Consequently, the PICC shall handle up to 3 cascade levels to get all UID bytes. Within each cascade level, a part of UID shall be transmitted to the PCD. According to the cascade level, three types of UID size are defined. This UID size shall be consistent with Table 4.

Table 9 — UID size

Cascade level	UID size	Number of UID bytes
1	single	4
2	double	7
3	triple	10

The UID is a fixed unique number or a random number which is dynamically generated by the PICC. The first byte (uid0) of the UID assigns the content of the following bytes of the UID.

Table 10 — Single size UIDs

uid0	Description
'08'	uid1 to uid3 is a random number which is dynamically generated
'x0' - 'x7'	proprietary fixed number
'x9' - 'xE'	
'18' - 'F8'	RFU
'xF'	

The value '88' of the cascade tag CT shall not be used for uid0 in single size UID.

Table 11 — Double and triple size UIDs

uid0	Description
Manufacturer ID according to ISO/IEC 7816-6/AM1*	Each manufacturer is responsible for the uniqueness of the value of the other bytes of the unique number.
* The values '81' to 'FE', which are marked for 'Private use' in ISO/IEC 7816-6/AM1 shall not be allowed in this context.	

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01597985
Not for Resale,2008/5/7 17:48:2 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 101

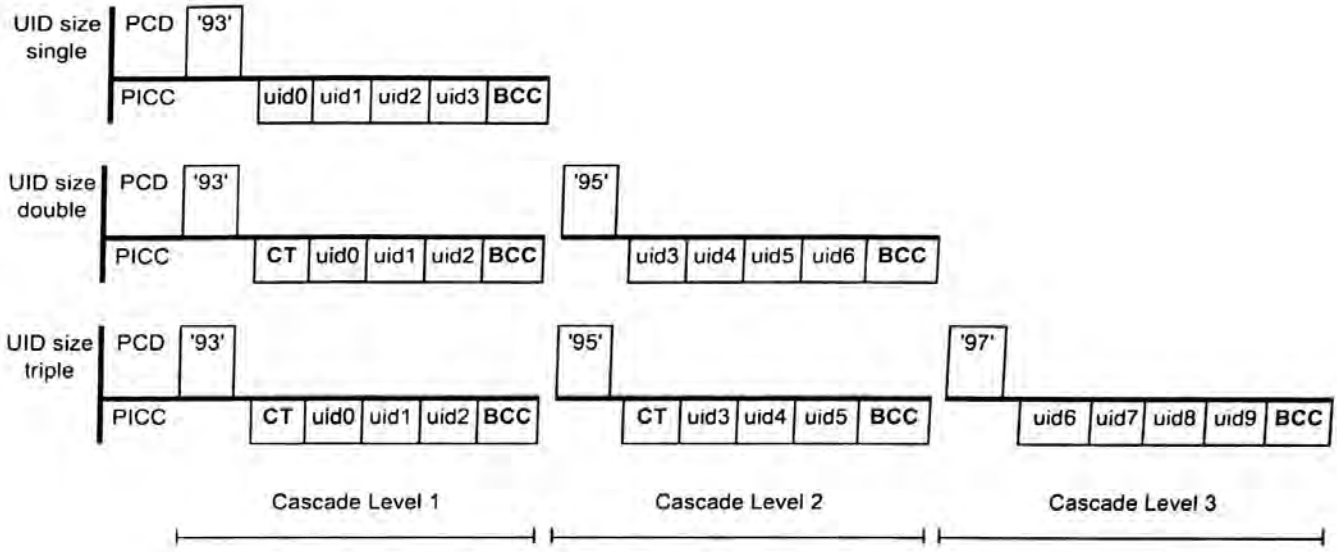


Figure 11 — Usage of cascade levels

NOTE The purpose of the cascade tag is to force a collision with PICCs that have a smaller UID size.

The following algorithm shall apply to the PCD to get the complete UID:

Step 1	The PCD selects cascade level 1
Step 2	The anticollision loop shall be performed
Step 3	The PCD shall check the cascade bit of SAK
Step 4	If the cascade bit is set, the PCD shall increase the cascade level and initiate a new anticollision loop

7 Type B – Initialization and anticollision

This section describes the initialization and collision detection protocol applicable for PICCs of Type B.

7.1 Character, frame format and timing

This section defines the character, frame format and timing used during communication initialization and anticollision for PICCs of Type B. For bit representation and coding refer to ISO/IEC 14443-2.

7.1.1 Character transmission format

Bytes are transmitted and received between PICCs and a PCD by characters, the format of which during the Anti-collision sequence is as follows:

— 1 start bit at logic "0";

— 8 data bits transmitted, LSB first;

— 1 stop bit at logic "1".

The transmission of one byte is performed with a character requiring 10 etu as illustrated below.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 102

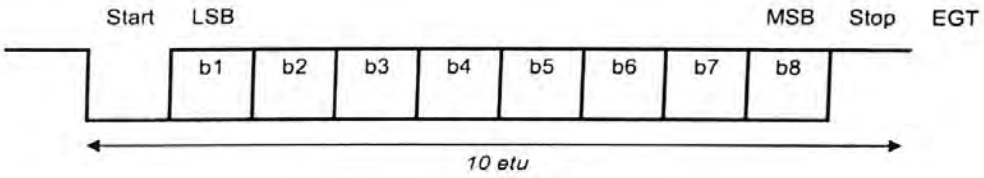


Figure 12 — Character format

Bit boundaries within a character shall occur between (n - 0,125) etu and (n + 0,125) etu where n is the number of bit boundaries after the start bit falling edge ($1 \leq n \leq 9$).

7.1.2 Character separation

A character is separated from the next one by the extra guard time EGT.

The EGT between 2 consecutive characters sent by the PCD to the PICC shall be between 0 and 57 µs.

The EGT between 2 consecutive characters sent by the PICC to the PCD shall be between 0 and 19 µs.

7.1.3 Frame format

PCDs and PICCs shall send characters as frames. The frame is normally delimited by SOF and by EOF. See 7.10.3 for exceptions.




Figure 13 — Frame Format

7.1.4 SOF

SOF is composed of:

— one falling edge;

— followed by 10 etu with a logic "0";

— followed by one single rising edge located anywhere within the following etu;

— followed by at least 2 etu (but no more than 3 etu) with a logic "1".

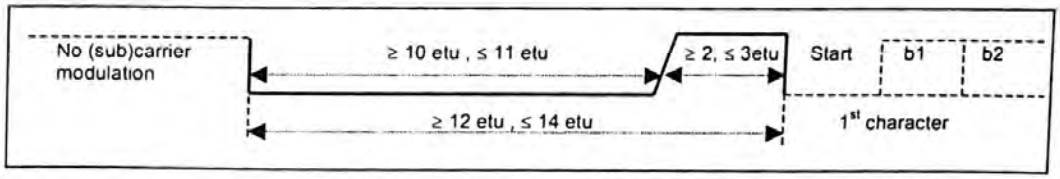


Figure 14 — SOF

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 103

7.1.5 EOF

EOF is composed of:

— one falling edge,

— followed by 10 etu with a logic "0";

— followed by one single rising edge located anywhere within the following etu.

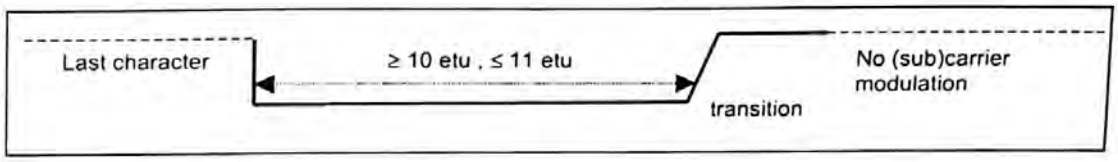


Figure 15 — EOF

NOTE The probability of receiving a false EOF is low and corresponds to the transmission of a '00' character with a wrong reception of the stop bit.

7.1.6 Timing before the PICC SOF

PICC start of communication after a PCD data transmission shall respect the timing defined in Figure 16.

The default minimum values of TR0 and TR1 are defined in ISO/IEC 14443-2 and may be reduced by the PCD, see 7.10.3.

The maximum value of TR0 is 256/*fs* for ATQB only and $(256/fs)*2^{FWI}$ for all other frames (see 7.9.4.3).

The maximum value of TR1 is 200/*fs*.

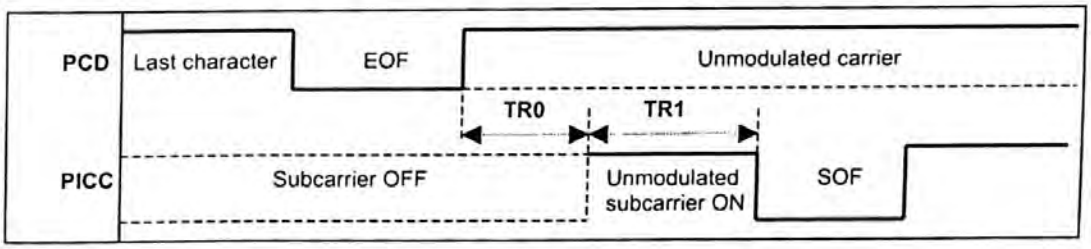


Figure 16 — PICC subcarrier SOF

A PICC may turn on the subcarrier only if it intends to begin transmitting information.

7.1.7 Timing before the PCD SOF

PCD start of communication after a PICC data transmission and EOF shall respect the timing in Figure 17.

The PICC shall turn off its subcarrier after the transmission of the EOF. The subcarrier signal shall:

— not be stopped before the end of the EOF;

— be stopped no later than 2 etu after the end of the EOF.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 104

The minimum delay between the PICC EOF start (falling edge) and the PCD SOF start (falling edge) is 10 etu + 32 /*fs*.

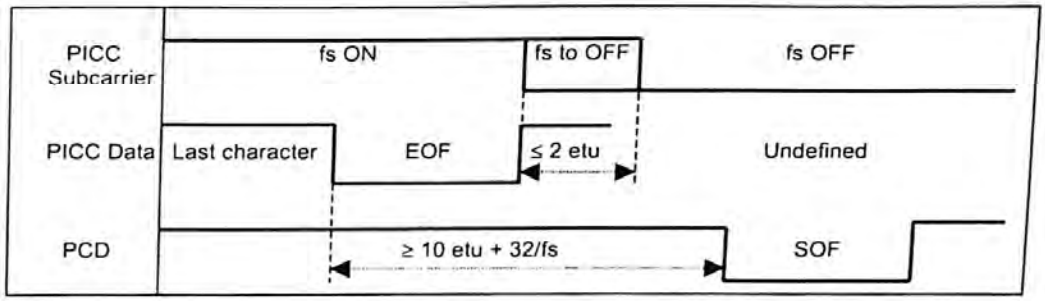


Figure 17 — PICC to PCD EOF

7.2 CRC_B

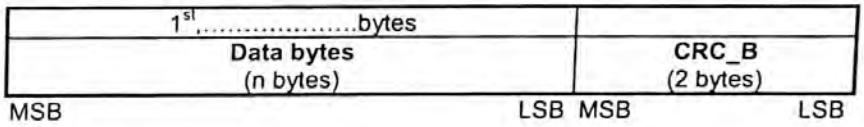


Figure 18 — Position of a CRC_B within a frame

A frame shall only be considered correct if it is received with a valid CRC_B value.

The frame CRC_B is a function of k data bits, which consist of all the data bits in the frame, excluding start bits, stop bits, delays between bytes, SOF and EOF, and the CRC_B itself. Since data is encoded in bytes, the number of bits k is a multiple of 8.

For error checking, the two CRC_B bytes are included in the frame, after the data bits and before the EOF. The CRC_B is as defined in ISO/IEC 13239. The initial register content shall be all ones: 'FFFF'.

For example refer to annex B.

7.3 Anticollision sequence

An anticollision sequence is managed by the PCD through a set of commands detailed in this section.

The PCD is the master of the communication with one or more PICCs. It initiates PICC communication activity by issuing a REQB Command to prompt for PICCs to respond.

During the anticollision sequence it may happen that two or more PICCs respond simultaneously: this is a collision. The command set allows the PCD to handle sequences to separate PICC transmissions in time. The PCD may repeat its anticollision procedure until it finds all PICCs in the operating volume.

Having completed the anticollision sequence, PICC communication will be under control of the PCD, allowing only one PICC to talk at a time.

The anticollision scheme is based on definition of timeslots in which PICCs are invited to answer with minimum identification data. The number of slots is parameterized in the REQB/WUPB and can vary from one to some integer number. PICC response probability in each timeslot is also controllable. PICCs are allowed to answer only once in the anticollision sequence.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008-5-7 17:48:2 GMTerse with ISO

IPR2025-01234
Apple EX1033 Page 105

Consequently, even in case of multiple PICCs present in the PCD field, there will probably be a slot in which only one PICC answers and where the PCD is able to capture the identification data. Based on the identification data the PCD is able to establish a communication channel with the identified PICC.

An anticollision sequence allows selection of one or more PICCs for further communication at any time.

The set of commands allows implementation of different anticollision management strategies at the PCD level. This strategy is under the control of the application designer and can include:

— probabilistic (repetitive single slot prompt with response probability less than or equal to 1);

— pseudo-deterministic (multiple slots with scanning of them during the anticollision sequence to have the maximum probability that all present PICCs answer);

— any combination of these methods that can be conducted dynamically.

7.4 PICC states description

Different states and transition conditions between states describe the PICC detailed behaviour during the anticollision sequence.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697585
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 106

7.4.1 State transition diagram

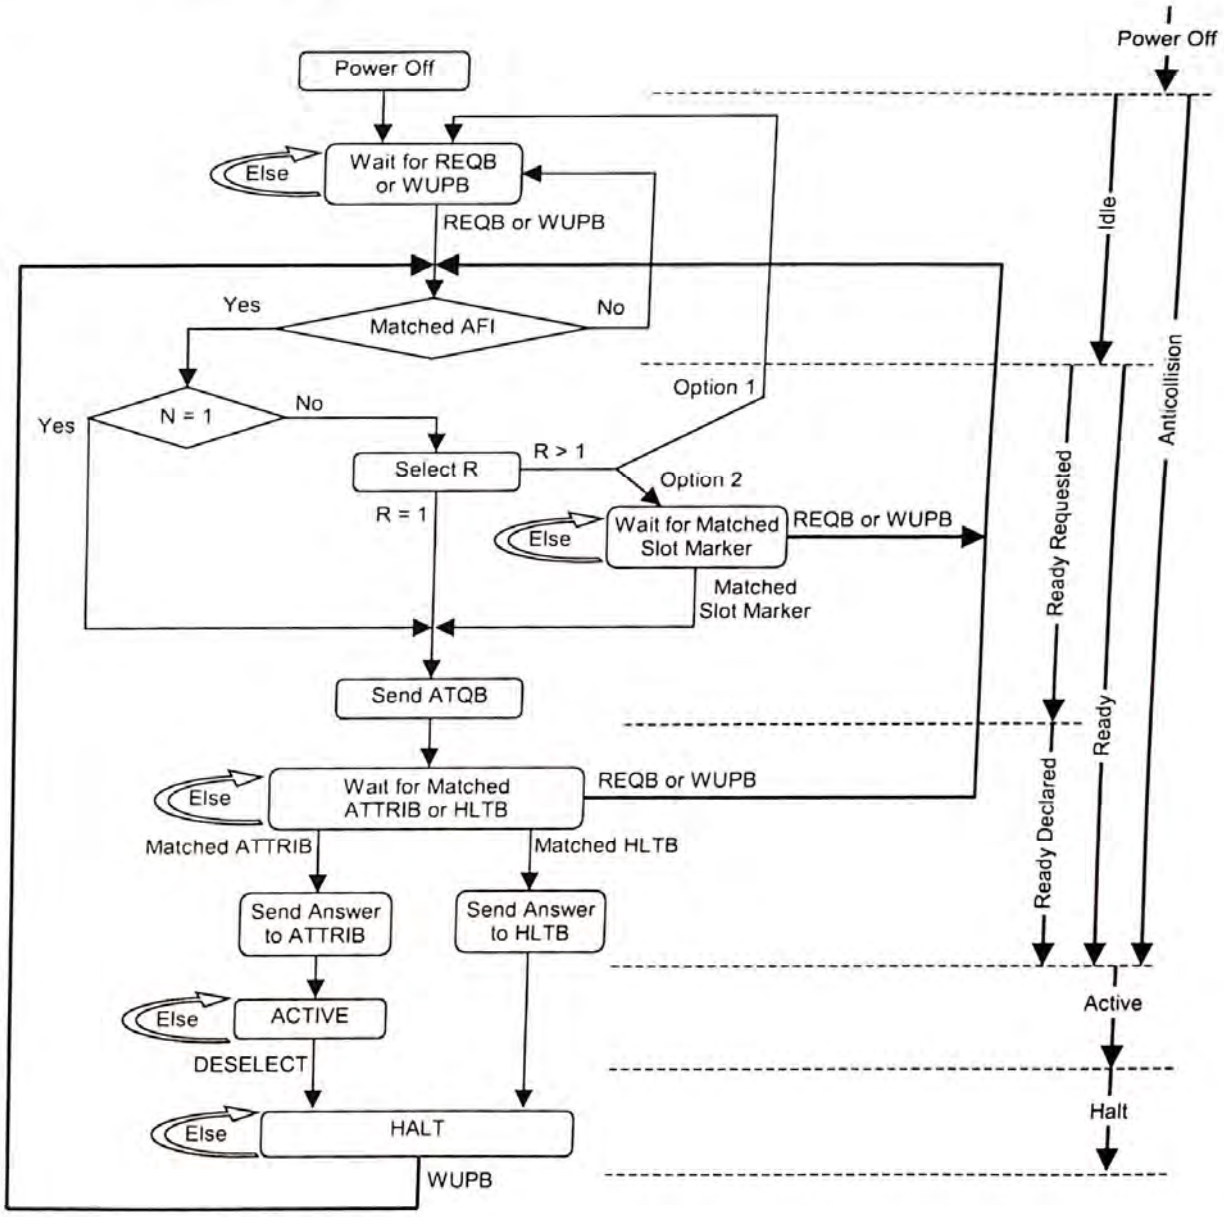


Figure 19 — PICC state transition flowchart example

NOTE 1 R is a random number chosen by the PICC in the range from 1 to N (for coding of N see 7.7.4).

NOTE 2 Option 1 – For PICCs not supporting Slot-MARKER Command (Probabilistic approach).

Option 2 – For PICCs supporting Slot-MARKER Command (Timeslot approach).

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMT+one with ISO

IPR2025-01234
Apple EX1033 Page 107

7.4.2 General statement for state description and transitions

To any state the following shall apply:

— the PICC shall return to POWER_OFF State if the RF field disappears.

To any state specific to the anticollision sequence (except ACTIVE State) the following shall apply:

— default communication parameters as defined in ISO/IEC 14443-2 and in the previous sections shall be used;

— the PICC shall not emit subcarrier except to transmit response frames as specified in the previous sections;

— if a frame from the PCD is valid (correct CRC_B), the PICC shall perform the required action and/or response depending on its state;

— as in anticollision commands the first 3 bits of the data in a frame are (101)b (3 first bits of anticollision Prefix byte) the PICC shall not answer to any command frame not starting with (101)b;

— the PICC shall only react to valid frames received (no response sent when transmission errors are detected).

7.4.3 POWER-OFF State

Description:

In the POWER-OFF State, the PICC is not powered due to a lack of carrier energy.

State exit conditions and transitions:

If the PICC is in an energizing magnetic field greater than Hmin (see ISO/IEC 14443-2), it shall enter its IDLE State within a delay not greater than defined in clause 5.

7.4.4 IDLE State

Description:

In the IDLE State, the PICC is powered. It listens for frames and shall recognize REQB and WUPB messages.

State exit conditions and transitions:

On reception of a valid REQB or WUPB Command frames the PICC moves onto the READY REQUESTED sub-state. (Valid REQB/WUPB means valid frame with REQB/WUPB Command and matched AFI. See REQB/WUPB Command specification for more details).

7.4.5 READY-REQUESTED sub-state

Description:

In the READY-REQUESTED sub-state, the PICC is powered and has received a valid REQB or WUPB Commands with a control parameter N. The PICC calculate a random number R which is used to control its subsequent operation as described in 7.6.

State exit conditions and transitions:

See 7.6 for details.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 108

7.4.6 READY-DECLARED sub-state

Description:

In the READY-DECLARED sub-state, the PICC is powered and has sent its ATQB corresponding to the last valid REQB/WUPB message received.

It listens to frames and shall recognize REQB/WUPB, ATTRIB and HLTB commands.

State exit conditions and transitions:

On reception of a valid ATTRIB Command the PICC shall enter the ACTIVE State if the PUPI in the ATTRIB Command matches the PICC PUPI.

If the PUPI in the ATTRIB Command does not match the PICC PUPI the PICC remains in the READY-DECLARED sub-state.

On reception of a valid REQB/WUPB Command frame the same conditions and transitions apply as on reception of a valid REQB/WUPB Command frame in the IDLE State.

On reception of a matched HLTB Command the PICC shall enter the HALT State.

7.4.7 ACTIVE State

Description:

The PICC is powered and has entered a higher layer mode since a Card Identifier (CID) has been assigned to this PICC through the ATTRIB Command.

The PICC listens to any higher layer message properly formatted (proper CID and valid CRC_B).

The PICC shall not emit subcarrier following any frame with invalid CRC_B or with another CID than the one assigned.

State exit conditions and transitions:

The PICC enters the HALT State when a valid DESELECT Command frame is received (DESELECT Command is defined in ISO/IEC 14443-4).

Specific remarks:

Valid REQB/WUPB or Slot-MARKER frames shall not be answered.

A valid frame with an ATTRIB Command shall not be answered.

In the higher layer protocol, specific commands may be defined to return the PICC to other states (IDLE or HALT). The PICC may return to these states only following reception of such commands.

7.4.8 HALT State

Description:

The PICC shall respond only to a WUPB Command which brings it back to the IDLE State.

State exit conditions and transitions:

The PICC returns to the POWER_OFF State if the RF field disappears.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 109

7.5 Command set

Four primitive commands are used to manage multi-node communication channels:

— REQB/WUPB;

— Slot-MARKER;

— ATTRIB;

— HLTB.

All four commands use the character, frame format and timing detailed in 7.1.

The commands and the responses of the PICC to these commands are described in the following sections.

Any frame received with a wrong format (wrong frame identifiers or invalid CRC_B) shall be ignored.

7.6 Anticollision response rules

A PICC which is in the READY-REQUESTED sub-state, after receiving a valid REQB/WUPB Command (Requested AFI=0 or AFI matched with an internal application), shall respond according to the following rules, where the parameter N has been given in the REQB/WUPB Command:

If N = 1 the PICC shall send an ATQB and shall move to the READY-DECLARED sub-state

If N > 1 the PICC shall internally generate a random number R which shall be evenly distributed between 1 to N

If R = 1 the PICC shall send an ATQB and shall move to the READY-DECLARED sub-state.

If R > 1:

— PICCs employing the probabilistic approach (informative option 1) shall return to IDLE State;

— PICCs employing the slot marker approach (informative option 2) shall wait until they have received a Slot-MARKER Command with a matched slot number (slot number = R) before sending the ATQB and moving to the READY-DECLARED sub-state.

7.7 REQB/WUPB Command

The REQB and WUPB Commands sent by the PCD are used to probe the field for PICCs of Type B.

In addition WUPB is particularly used to also wake up PICCs which are in HALT State.

The number of slots N is included in the command as a parameter to optimize the anti-collision algorithm for a given application. See Figure 19 for detailed description of when the PICC shall respond to these respective commands.

7.7.1 REQB/WUPB Command format

REQB/WUPB Command has the following format:

1st byte	2nd byte	3rd byte	4th, 5th bytes
APf (1 byte)	**AFI** (1 byte)	**PARAM** (1 byte).	**CRC_B** (2 bytes)
MSB LSB	MSB LSB	MSB LSB	MSB LSB

Figure 20 — REQB/WUPB Command format

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:2 GMTense with ISO
IPR2025-01234
Apple EX1033 Page 110

7.7.2 Coding of Anticollision Prefix byte APf

The Anticollision Prefix byte is APf = '05' = (0000 0101)b.

7.7.3 Coding of AFI

AFI (Application Family Identifier) represents the type of application targeted by the PCD and is used to preselect PICCs before the ATQB. Only PICCs with applications of the type indicated by the AFI may answer to a REQB/WUPB Command with AFI different to '00'.

When AFI equals '00', all PICCs shall process the REQB/WUPB.

The most significant half byte of AFI is used to code one specific or all application families, as defined in Table 12.

The least significant half byte of AFI is used to code one specific or all application sub-families. Sub-family codes different from 0 are proprietary.

Table 12 — AFI coding

AFI Most Significant half byte	AFI Least Significant half byte	Meaning – PICCs respond from	Examples / Note
'0'	'0'	All families and sub-families	No application preselection
X	'0'	All sub-families of family X	Wide application preselection
X	Y	Only the Yth sub-family of family X	
'0'	Y	Proprietary sub-family Y only	
'1'	'0', Y	Transport	Mass transit, Bus, Airline,...
'2'	'0', Y	Financial	IEP, Banking, Retail,...
'3'	'0', Y	Identification	Access Control,...
'4'	'0', Y	Telecommunication	Public Telephony, GSM,...
'5'	'0', Y	Medical	
'6'	'0', Y	Multimedia	Internet services....
'7'	'0', Y	Gaming	
'8'	'0', Y	Data Storage	Portable Files, ...
'9'-'F'	'0', Y	RFU	

NOTE X = '1' to 'F', Y = '1' to 'F'

7.7.4 Coding of PARAM

b8	b7	b6	b5	b4	b3	b2	b1
RFU				REQB / WUPB	N (Number of slots)		

All RFU bits shall be set to 0

Figure 21 — Coding of PARAM

b4 = 0 defines REQB: PICCs in IDLE State or READY State shall process this command
b4 = 1 defines WUPB: PICCs in IDLE State or READY State or HALT State shall process this command
b1, b2 and b3 are used to code the number of slots N according to Table 13.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale, 2006/5/7 17:48:2 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 111

Table 13 — Coding of N

b3	b2	b1	N
0	0	0	$1 = 2^0$
0	0	1	$2 = 2^1$
0	1	0	$4 = 2^2$
0	1	1	$8 = 2^3$
1	0	0	$16 = 2^4$
1	0	1	RFU
1	1	x	RFU

NOTE For each PICC, the probability of response (ATQB) in the first slot is 1/N. Thus, if the probabilistic approach is used in the PCD, N is not used to adjust the number of slots but the probability for the PICC to return its ATQB in this unique slot.

7.8 Slot-MARKER Command

After a REQB/WUPB Command, the PCD may send up to (N-1) Slot-MARKER Commands to define the start of each timeslot.

Slot-MARKER Commands can be sent:

— after the end of an ATQB message received by the PCD to mark the start of the next slot;

— or earlier if no ATQB is received (no need to wait until the end of a slot, if this slot is known to be empty).

It is not mandatory for a PICC to support this command. In this case, the PICC shall ignore any Slot-MARKER Command. The PICC may only send its ATQB after REQB (in the first slot) in a probabilistic approach.

7.8.1 Slot-MARKER Command format

Slot-MARKER Command has the following format:

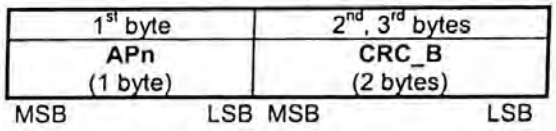


Figure 22 — Slot-MARKER Command format

7.8.2 Coding of Anticollision Prefix byte APn

APn = (nnnn 0101)b where nnnn codes the slot number as defined in the Table 14.

Table 14 — Coding of slot number

nnnn	Slot number
0001	2
0010	3
0011	4
.....	....
1110	15
1111	16

NOTE It is not mandatory that the Slot-MARKER Commands are sent sequentially with incremental slot numbers.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
© ISO/IEC 2001 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO
IPR2025-01234
Apple EX1033 Page 112

7.9 ATQB Response

The response to both REQB/WUPB and Slot-MARKER Commands is named ATQB.

7.9.1 ATQB Response format

ATQB Response has the following format:

1st byte	2nd, 3rd, 4th, 5th bytes	6th, 7th, 8th, 9th, bytes	10th, 11th, 12th, bytes	13th, 14th bytes
'50' (1 byte)	PUPI (4 bytes)	Application Data (4 bytes)	Protocol Info (3 bytes)	CRC_B (2 bytes)
MSB LSB	MSB LSB	MSB LSB	MSB LSB	MSB LSB

Figure 23 — ATQB Response format

7.9.2 PUPI (Pseudo-Unique PICC Identifier)

A Pseudo-Unique PICC Identifier (PUPI) is used to differentiate PICCs during anticollision. This 4-byte number may be either a number dynamically generated by the PICC or a diversified fixed number. The PUPI may only change in the IDLE State.

7.9.3 Application Data

The Application data field is used to inform the PCD which applications are currently installed in the PICC. This information allows the PCD to select the desired PICC in the presence of more than one PICC.

The application data is defined dependent upon the ADC (Application Data Coding) field in the Protocol Info (see 7.9.4.), which defines if either the CRC_B compressing method described below or proprietary coding is used.

When the CRC_B compressing coding is used, Application Data field contains the following:

1st byte	2nd, 3rd bytes	4th byte
AFI (1 byte)	CRC_B(AID) (2 bytes)	Numbers of Applications (1 byte)
MSB LSB	MSB LSB	MSB LSB

Figure 24 — Application Data format

7.9.3.1 AFI

For mono application PICCs AFI gives the family of the application (see AFI coding in Table 12).

For multi application PICCs AFI gives the family of the application described in CRC_B(AID).

7.9.3.2 CRC_B(AID)

CRC_B(AID) is the result of calculation of CRC_B of the AID (as defined in ISO/IEC 7816-5) of an application in the PICC matching the AFI given in the REQB/WUPB Command.

7.9.3.3 Numbers of Applications

Indicates on presence of other applications in the PICC.

The most significant half byte value gives the number of applications corresponding to the AFI given in Application Data with '0' meaning no application and 'F' meaning 15 applications or more.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 113

The least significant half byte value gives the total number of applications in the PICC with '0' meaning no application and 'F' meaning 15 applications or more.

7.9.4 Protocol Info

The Protocol Info field indicates the parameters supported by the PICC. It is formatted as detailed below.

1st byte		2nd byte		3rd byte		
Bit_Rate_capability (8 bits)		**Max_Frame_Size** (4 bits)	**Protocol_Type** (4 bits)	**FWI** (4 bits)	**ADC** (2 bits)	**FO** (2 bit)
MSB	LSB	MSB	LSB	MSB		LSB

Figure 25 — Protocol Info format

7.9.4.1 FO

Table 15 — Frame Option supported by the PICC

b2	b1	Meaning
1	x	NAD supported by the PICC
x	1	CID supported by the PICC

7.9.4.2 ADC

Table 16 — Application Data Coding supported by the PICC

b4	b3	Meaning
0	0	Application is proprietary
0	1	Application is coded as described in 7.9.3.
Other values are RFU		

7.9.4.3 FWI

Frame Waiting time Integer (4 bits):

FWI codes an integer value used to define the FWT.

The FWT defines the maximum time for a PICC to start its response after the end of a PCD frame.

FWT is calculated by the formula:

$$FWT = (256 \times 16/fc) \times 2^{FWI}$$

where the value of FWI has the range from 0 to 14 and the value of 15 is RFU.

For FWI = 0, FWT is minimal (~ 302 µs);

For FWI = 14, FWT is maximal (~ 4949 ms).

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMT+se with ISO

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 114

7.9.4.4 Protocol_Type

Table 17 — Protocol Types supported by the PICC

b4	b3	b2	b1	Meaning
0	0	0	1	PICC compliant with ISO/IEC 14443-4
0	0	0	0	PICC not compliant with ISO/IEC 14443-4
Other values are RFU.				

7.9.4.5 Max_Frame_Size

Table 18 — Maximum frame size

Maximum Frame Size Code in ATQB	0	1	2	3	4	5	6	7	8	9-F
Maximum Frame Size (bytes)	16	24	32	40	48	64	96	128	256	RFU > 256

7.9.4.6 Bit_Rate_capability

Table 19 — Bit rates supported by the PICC

b8	b7	b6	b5	b4	b3	b2	b1	Meaning
0	0	0	0	0	0	0	0	PICC supports only 106 kbit/s in both directions
1	x	x	x	0	x	x	x	Same bit rate from PCD to PICC and from PICC to PCD compulsory
x	x	x	1	0	x	x	x	PICC to PCD, 1etu = 64 / *fc*, bit rate supported is 212 kbit/s
x	x	1	x	0	x	x	x	PICC to PCD, 1etu = 32 / *fc*, bit rate supported is 424 kbit/s
x	1	x	x	0	x	x	x	PICC to PCD, 1etu = 16 / *fc*, bit rate supported is 847 kbit/s
x	x	x	x	0	x	x	1	PCD to PICC, 1etu = 64 / *fc*, bit rate supported is 212 kbit/s
x	x	x	x	0	x	1	x	PCD to PICC, 1etu = 32 / *fc*, bit rate supported is 424 kbit/s
x	x	x	x	0	1	x	x	PCD to PICC, 1etu = 16 / *fc*, bit rate supported is 847 kbit/s
Other values (with b4 = 1) are RFU.								

7.10 ATTRIB Command

The ATTRIB Command sent by the PCD shall include information required to select a single PICC.

A PICC receiving an ATTRIB Command with its identifier becomes selected and assigned to a dedicated channel. After being selected, this PICC only responds to commands defined in ISO/IEC 14443-4 which include its unique CID.

7.10.1 ATTRIB Command format

ATTRIB Command has the following format:

1st byte	2nd, 3rd, 4th, 5th bytes	6th byte	7th byte	8th byte	9th byte	10th,.....bytes	
'1D' (1 byte)	Identifier (4 bytes)	Param 1 (1 byte)	Param 2 (1 byte)	Param 3 (1 byte)	Param 4 (1 byte)	Higher layer - INF (optional – 0 or more bytes)	CRC_B (2 bytes)
MSB LSB	MSB LSB MSB LSB	MSB LSB	MSB LSB	MSB LSB	MSB LSB	MSB LSB	MSB LSB

Figure 26 — ATTRIB Command format

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale, 2008/5/7 17:48:2 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 115

7.10.2 Identifier

This identifier is the value of the PUPI sent by the PICC in the ATQB.

7.10.3 Coding of Param 1

b8	b7	b6	b5	b4	b3	b2	b1
Minimum TR0		Minimum TR1		EOF	SOF	RFU	

All RFU bits shall be set to 0 if not otherwise specified

Figure 27 — Coding of Param 1

7.10.3.1 Minimum TR0

Minimum TR0 indicates to the PICC the minimum delay before responding after the end of a command sent by a PCD. The default value has been defined in ISO/IEC 14443-2, 9.2.5.

Table 20 — Minimum TR0 coding

b8	b7	Minimum TR0
0	0	default value
0	1	48/*fs*
1	0	16/*fs*
1	1	RFU

NOTE Minimum TR0 is required by the PCD when switching from transmit to receive and its value depends on the PCD performance.

7.10.3.2 Minimum TR1

Minimum TR1 indicates to the PICC the minimum delay between subcarrier modulation start and beginning of data transmission. The default value has been defined in ISO/IEC 14443-2, 9.2.5.

Table 21 — Minimum TR1 coding

b6	b5	Minimum TR1
0	0	default value
0	1	64/*fs*
1	0	16/*fs*
1	1	RFU

NOTE Minimum TR1 is required by the PCD for synchronization with the PICC and its value depends on the PCD performance.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to:PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMT+se with ISO

IPR2025-01234
Apple EX1033 Page 116

7.10.3.3 EOF/SOF

b3 and b4 indicate the PCD capability to support suppression of the EOF and/or SOF from PICC to PCD, which may reduce communication overhead. The suppression of EOF and/or SOF is optional for the PICC. The coding of b3 and b4 is as follows.

Table 22 — SOF handling

b3	SOF required
0	Yes
1	No

Table 23 — EOF handling

b4	EOF required
0	Yes
1	No

7.10.4 Coding of Param 2

The least significant half byte (b4 to b1) is used to code the maximum frame size that can be received by the PCD as specified in Table 24.

Table 24 — Coding of b4 to b1 of Param 2

Maximum Frame Size Code in ATTRIB	0	1	2	3	4	5	6	7	8	9-F
Maximum Frame Size (bytes)	16	24	32	40	48	64	96	128	256	RFU > 256

The most significant half byte (b8 to b5) is used for bit rate selection, as specified in Tables 25 and 26.

Table 25 — Coding of b6 & b5 of Param 2

b6	b5	Meaning
0	0	PCD to PICC, 1etu = 128 / *fc*, bit rate is 106 kbit/s
0	1	PCD to PICC, 1etu = 64 / *fc*, bit rate is 212 kbit/s
1	0	PCD to PICC, 1etu = 32 / *fc*, bit rate is 424 kbit/s
1	1	PCD to PICC, 1etu = 16 / *fc*, bit rate is 847 kbit/s

Table 26 — Coding of b8 & b7 of Param 2

b8	b7	Meaning
0	0	PICC to PCD, 1etu = 128 / *fc*, bit rate is 106 kbit/s
0	1	PICC to PCD, 1etu = 64 / *fc*, bit rate is 212 kbit/s
1	0	PICC to PCD, 1etu = 32 / *fc*, bit rate is 424 kbit/s
1	1	PICC to PCD, 1etu = 16 / *fc*, bit rate is 847 kbit/s

7.10.5 Coding of Param 3

The least significant half byte (b4 to b1) is used for confirmation of the protocol type as specified in Table 17.

The most significant half byte (b8 to b5) is set to (0000)b, all other values are RFU.

©ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA): 0169/985
Not for Resale 2008-5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 117

7.10.6 Coding of Param 4

The Param 4 byte consists of two parts:

— the least significant half byte (b4 to b1) is named Card Identifier (CID) and defines the logical number of the addressed PICC in the range from 0 to 14. The value 15 is RFU. The CID is specified by the PCD and shall be unique for each active PICC. If the PICC does not support CID, code value (0000)b shall be used;

— the most significant half byte (b8 to b5) is set to (0000)b, all other values are RFU.

7.10.7 Higher layer INF

Any higher layer command transferable as the INF field of ISO/IEC 14443-4 may be included.

It is not mandatory for the PICC to process successfully any command in this context.

The PICC shall however process successfully such message if no application command is included.

7.11 Answer to ATTRIB Command

The PICC shall answer to any valid ATTRIB Command (correct PUPI and valid CRC_B) with the format described below.

1st byte		2nd .....bytes	
MBLI	**CID**	**Higher layer Response**	**CRC_B**
(1 byte)		(optional 0 or more bytes)	(2 bytes)
MSB LSB		MSB LSB	MSB LSB

Figure 28 — Format of the Answer to an ATTRIB Command

The first byte consists of two parts:

— the least significant half byte (b4 to b1) contains the returned CID. If the PICC does not support CID, code value (0000)b is returned;

— the most significant half byte (b8 to b5) is called the Maximum Buffer Length Index (MBLI). It is used by the PICC to let the PCD know the limit of its internal buffer to received chained frames. The coding of MBLI is as follows:

  — MBLI = 0 means that the PICC provides no information on its internal input buffer size;

  — MBLI > 0 is used to calculate the actual internal maximum buffer length (MBL) according to the following formula: MBL = (PICC Maximum Frame Size)* $2^{(MBLI-1)}$ where the PICC maximum frame size is returned by the PICC in its ATQB. When it send chained frames to a PICC, the PCD shall ensure that the accumulated length is never greater than MBL.

Remaining bytes are optional and used for higher layer response.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTensa with ISO

IPR2025-01234
Apple EX1033 Page 118

As illustrated below, a PICC shall answer the empty (no higher layer INF field) ATTRIB Command with an empty higher layer response.

1st byte		2nd, 3rd bytes
MBLI	**CID**	**CRC_B**
(1 byte)		(2 bytes)
MSB LSB		MSB LSB

Figure 29 — PICC Answer to ATTRIB format without higher layer response

NOTE 1 A valid Answer (same CID and valid CRC_B) to an ATTRIB Command (as defined in Figure 28 or 29) is the means for a PCD to verify that PICC selection has been successful.

NOTE 2 Higher layer response indicating that the higher layer command is not supported by the PICC within this context is allowed as long as the PICC response meets the format described above.

7.12 HLTB Command and Answer

The HLTB Command is used to set a PICC in HALT State and stop responding to a REQB.

After answering to this command the PICC shall ignore any commands except the WUPB Command (see 7.7)

HLTB Command has the following format:

1st byte	2nd, 3rd, 4th, 5th bytes	6th, 7th bytes
'50' (1 byte)	**Identifier** (4 bytes)	**CRC_B** (2 bytes)
MSB LSB	MSB LSB	MSB LSB

Figure 30 — Format of the HLTB Command

The 4 bytes identifier is the value of the PUPI sent by the PICC in the ATQB.

The format of Answer to a HLTB Command from the PICC is as follows:

1st byte	2nd, 3rd bytes
'00' (1 byte)	**CRC_B** (2 bytes)
MSB LSB	MSB LSB

Figure 31 — Format of PICC Answer to HLTB Command

© ISO/IEC 2001 — All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 119

Annex A
(informative)

Communication example Type A

This example shows the select sequence with 2 PICCs in the field on the assumption of:

— PICC #1 with UID size: single, value of uid0 is '10';

— PICC #2 with UID size: double.

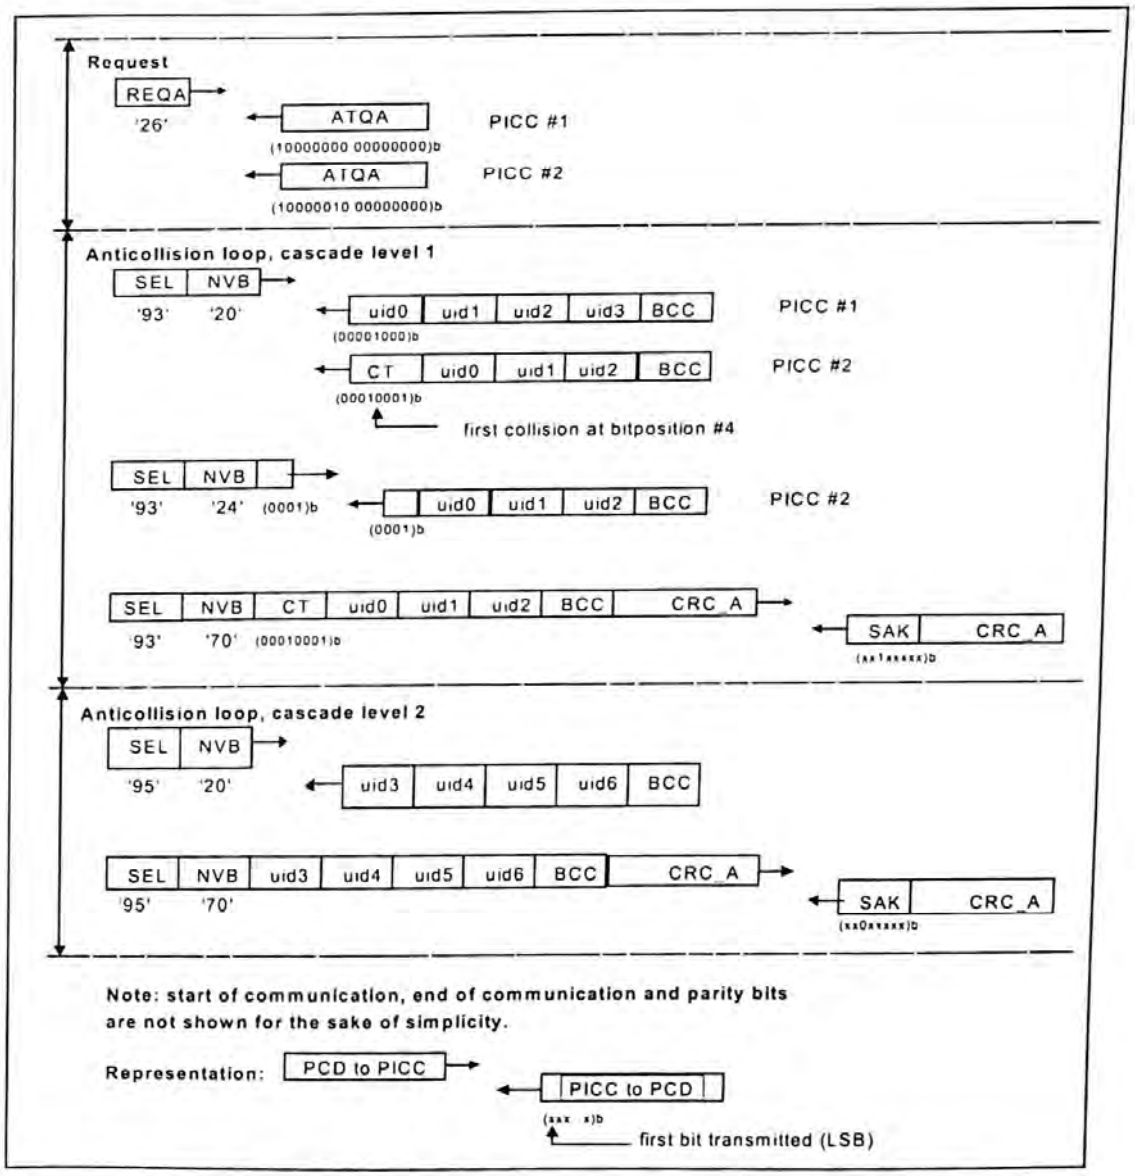


Figure A.1 — Select sequence with bit frame anticollision

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/3/7 17:45:2 GMTense with ISO
© ISO/IEC 2001 – All rights reserved
IPR2025-01234
Apple EX1033 Page 120

Explanations to Figure A.1:

Request	— PCD transmits the REQA Command — All PICCs respond with their ATQA: — PICC #1 indicates bit frame anticollision and UID size: single; — PICC #2 indicates bit frame anticollision and UID size: double.
Anticollision loop, cascade level 1	— PCD transmits an ANTICOLLISION Command: — SEL specifies bit frame anticollision and cascade level 1; — the value '20' of NVB specifies that the PCD will transmit no part of UID CL1; — consequently all PICCs in the field respond with their complete UID CL1; — due to the value '88' of the cascade tag, the first collision occurs at bit position #4; — PCD transmits another ANTICOLLISION Command that includes the first 3 bits of UID CL1 that were received before the collision occurs, followed by a (1)b. Consequently the PCD assigns NVB with the value '24'; — these 4 bits correspond to the first bits of UID CL1 of PICC #2; — PICC #2 responds with its 36 remaining bits of UID CL1. Since PICC #1 does not respond, no collision occurs; — since the PCD "knows" all bits of UID CL1 of PICC #2, it transmits a SELECT Command for PICC #2; — PICC #2 responds with SAK, indicating that UID is not complete; — consequently, the PCD increases the cascade level.
Anticollision loop, cascade level 2	— PCD transmits another ANTICOLLISION Command: — SEL specifies bit frame anticollision and cascade level 2; — NVB is reset to '20' to force PICC #2 to respond with its complete UID CL2; — PICC #2 responds with all 40 bits of its UID CL2; — PCD transmits the SELECT Command for PICC #2, cascade level 2; — PICC #2 responds with SAK, indicating that UID is complete, and transits from READY State to ACTIVE State.

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 121

Annex B
(informative)

CRC_A and CRC_B encoding

CRC_A encoding

This annex is provided for explanatory purposes and indicates the bit patterns that will exist in the physical layer. It is included for the purpose of checking an ISO/IEC 14443-3 Type A implementation of CRC_A encoding.

The process of encoding and decoding may be conveniently carried out by a 16-stage cyclic shift register with appropriate feedback gates. According to ITU-T Recommendation V.41, ANNEX I, figures I-1/V.41 and I-2/V.41 the flip-flops of the register shall be numbered from FF0 to FF15. FF0 shall be the leftmost flip-flop where data is shifted in, FF15 shall be the rightmost flip-flop where data is shifted out.

Table B.1 defines the initial content of the register.

Table B.1 — Initial content of 16-stage shift register according to value '6363'

FF0	FF1	FF2	FF3	FF4	FF5	FF6	FF7	FF8	FF9	FF10	FF11	FF12	FF13	FF14	FF15
0	1	1	0	0	0	1	1	0	1	1	0	0	0	1	1

Consequently, FF0 corresponds to the MSB and FF15 to the LSB.

Examples of bit patterns that will be transmitted via standard frames

EXAMPLE 1 Transmission of data, first byte = '00', second byte = '00', CRC_A appended.

Calculated CRC_A = '1EA0'

First bit transmitted

↓

S	0000 0000	1	0000 0000	1	0000 0101	1	0111 1000	1	E
	'00'	P	'00'	P	'A0'	P	'1E'	P	

Figure B.1 — Example 1 for CRC_A encoding

Table B.2 — Content of 16-stage shift register according to value '1EA0'

FF0	FF1	FF2	FF3	FF4	FF5	FF6	FF7	FF8	FF9	FF10	FF11	FF12	FF13	FF14	FF15
0	0	0	1	1	1	1	0	1	0	1	0	0	0	0	0

EXAMPLE 2 Transmission of data block, first byte = '12', second byte = '34', CRC_A appended.

Calculated CRC_A = 'CF26'

First bit transmitted

↓

S	0100 1000	1	0010 1100	0	0110 0100	0	1111 0011	1	E
	'12'	P	'34'	P	'26'	P	'CF'	P	

Figure B.2 — Example 2 for CRC_A encoding

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to:PENN STATE UNIVERSITY (DAL 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 122

Table B.3 — Content of 16-stage shift register according to value 'CF26'

FF0	FF1	FF2	FF3	FF4	FF5	FF6	FF7	FF8	FF9	FF10	FF11	FF12	FF13	FF14	FF15
1	1	0	0	1	1	1	1	0	0	1	0	0	1	1	0

CRC_B encoding

This annex is provided for explanatory purposes and indicates the bit patterns that will exist in the physical layer. It is included for the purpose of checking an ISO/IEC 14443-3 Type B implementation of CRC_B encoding. Refer to ISO/IEC 13239 and CCITT X.25 #2.2.7 and V.42 #8.1.1.6.1 for further details.

Initial Value = 'FFFF'

Examples of bit patterns that will be transmitted via standard frames

EXAMPLE 1 Transmission of first byte = '00', second byte = '00', third byte = '00', CRC_B appended.

Calculated CRC_B = 'C6CC'

		1st byte	2nd byte	3rd byte	CRC_B		
Frame =	SOF	'00'	'00'	'00'	'CC'	'C6'	EOF

Figure B.3 — Example 1 for CRC_B encoding

EXAMPLE 2 Transmission of first byte = '0F', second byte = 'AA', third byte = 'FF', CRC_B appended.

Calculated CRC_B = 'D1FC'

		1st byte	2nd byte	3rd byte	CRC_B		
Frame =	SOF	'0F'	'AA'	'FF'	'FC'	'D1'	EOF

Figure B.4 — Example 2 for CRC_B encoding

EXAMPLE 3 Transmission of first byte = '0A', second byte = '12', third byte = '34', fourth byte = '56', CRC_B appended.

Calculated CRC_B = 'F62C'

		1st byte	2nd byte	3rd byte	4th byte	CRC_B		
Frame =	SOF	'0A'	'12'	'34'	'56'	'2C'	'F6'	EOF

Figure B.5 — Example 3 for CRC_B encoding

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 123

Code sample written in C language for CRC calculation

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>

#define CRC_A 1
#define CRC_B 2
#define BYTE unsigned char

unsigned short UpdateCrc(unsigned char ch, unsigned short *lpwCrc)
{
  ch = (ch^(unsigned char)((*lpwCrc) & 0x00FF));

  ch = (ch^(ch<<4));

  *lpwCrc = (*lpwCrc >> 8)^((unsigned short)ch << 8)^((unsigned short)ch<<3)^((unsigned short)ch>>4);

  return(*lpwCrc);
}

void ComputeCrc(int CRCType, char *Data, int Length,
  BYTE *TransmitFirst, BYTE *TransmitSecond)
{
  unsigned char chBlock;
  unsigned short wCrc;

  switch(CRCType) {
    case CRC_A:
      wCrc = 0x6363;  /* ITU-V.41 */
      break;
    case CRC_B:
      wCrc = 0xFFFF,  /* ISO/IEC 13239 (formerly ISO/IEC 3309) */
      break;
    default:
      return;
  }

  do {
    chBlock = *Data++;
    UpdateCrc(chBlock, &wCrc);
  } while (--Length);
  if (CRCType == CRC_B)
    wCrc = ~wCrc; /* ISO/IEC 13239 (formerly ISO/IEC 3309) */

  *TransmitFirst = (BYTE) (wCrc & 0xFF);
  *TransmitSecond = (BYTE) ((wCrc >> 8) & 0xFF);

  return;
}

BYTE BuffCRC_A[10] = {0x12, 0x34};
BYTE BuffCRC_B[10] = {0x0A, 0x12, 0x34, 0x56};
unsigned short Crc;
BYTE First, Second;
FILE *OutFd;
int i;
```


Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 124

```
int main(void)
{
  printf("CRC-16 reference results ISO/IEC 14443-3\n");
  printf("Crc-16 G(x) = x^16 + x^12 + x^5 + 1\n\n");
  printf("CRC_A of [ ");
  for(i=0; i<2; i++) printf("%02X ",BuffCRC_A[i]);
  ComputeCrc(CRC_A, BuffCRC_A, 2, &First, &Second);
  printf("] Transmitted: %02X then %02X.\n", First, Second);
  printf("CRC_B of [ ");
  for(i=0; i<4; i++) printf("%02X ",BuffCRC_B[i]);
  ComputeCrc(CRC_B, BuffCRC_B, 4, &First, &Second);
  printf("] Transmitted: %02X then %02X.\n", First, Second);

  return(0);
}
```

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 125

Annex C
(informative)

Type A timeslot – Initialization and anticollision

This annex describes the timeslot detection protocol applicable for PICCs of Type A. A PCD supporting Polling for both of Type A and Type B is not required to support this detection protocol as a mandatory anticollision protocol as described in clause 5.

C.1 Terms and abbreviations

The following are specific to this section of ISO/IEC 14443-3.

ATQA_t	Answer To reQuest of Type A_ timeslot
ATQ-ID	Answer To REQ-ID
CID_t	Card IDentifier of Type A_timeslot
HLTA_t	HALT Command of Type A_timeslot
REQA_t	REQuest Command of Type A_timeslot
REQ-ID	REQuest-ID Command
SAK_t	Select AKnowledge of Type A_timeslot
SEL_t	SELect Command of Type A_timeslot

C.2 Timing and frame format

C.2.1 Timing definitions

Polling reset time
Polling reset times of Type A_timeslot are equal to those of Type A in clause 5.

Time interval from REQA_t to ATQA_t
PICC returns ATQA_t after waiting for 32+/-2 etu upon receiving REQA_t. The PCD may not recognize the coding of the ATQA_t.

Request Guard Time
The Request Guard Time is defined as the minimum time between the start of bits of two consecutive Request commands. Its value shall be 0,5 ms.

Frame Guard Time
The Frame Guard Time is defined as the minimum time between the rising edge of the last bit and the falling edge of the start bit of two consecutive frames in opposite direction. Its value shall be 10 etu.

Timeslot length
The first timeslot starts in 32 etu after REQ-ID. Each timeslot length is 104 etu consisting of 94 etu for ATQ-ID reception and 10 etu frame guard time succeeding.

C.2.2 Frame formats

REQA_t frame
See 6.1.5.1 and table 2. The data content is '35' for a REQA_t.

Standard frame
The LSB of each byte is transmitted first. Each byte has no parity. CRC_B is defined in 7.2.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:2 GMT+se with ISO

S	data: n *(8 data bits +no parity)				CRC_B 2 bytes	E
	1byte command or response	(0 or 1byte) (parameter 1)	(0 or 1 byte) (parameter 2)	(0 or 8 bytes) (UID)		

C.3 PICC states

The following clauses provide the states for a PICC, Type A_timeslot.

POWER-OFF State
In the POWER-OFF State, the PICC is not energized due to lack of carrier and shall not emit subcarrier.

IDLE State
This state is entered after the field has been active within a 5 ms delay. The PICC recognizes REQA_t.

READY State
This state is entered by REQA_t. The PICC recognizes REQA_t, REQ-ID and SEL_t.

ACTIVE State
This state has two substates. The first sub-state is entered by SEL_t with its complete UID and CID_t. In this sub-state, the PICC recognizes HLTA_t and proprietary higher layer commands. The second sub-state is in ISO/IEC 14443-4 and entered from the first sub-state by a command defined in ISO/IEC 14443-4.

HALT State
This state is entered by HLTA_t from ACTIVE State. In this state, the PICC is mute.

C.4 Command/response set

Four sets of command and response are used.

Type	Name	Coding (b8-b1)	Meaning
command	REQA_t	(b7-b1) (0110101)b (='35')	Request PICC Type A timeslot to answer ATQA_t.
Response	ATQA_t	any one-byte content of '00' to 'FF'	Answer to REQA_t. PCD can recognize the existence of Type A timeslot PICC. However, the PCD is not required to recognize the coding of the ATQA_t
command	REQ-ID	(00001000)b (= '08')	Request the PICC to answer its UID to one of timeslots. REQ-ID is followed by two parameters
Response	ATQ-ID	(00000110)b (= '06')	Answer 8-byte UID to one of 4 timeslots. ATQ-ID is followed by its 8-byte UID
command	SEL_t	(01000NNN)b, (NNN=CID_t No.(0-7)) (01100NNN)b, (NNN+8=CID_t No.(8-15))	Select the PICC with its UID and set the CID_t SEL_t is followed by 8-byte UID
Response	SAK_t	b8-b5 (1000)b: Additional information available in protocols b8-b5 (1100)b: Default mode in protocols b4-b1(0000)b: Other than ISO/IEC 14443-4 b4-b1(0001)b. PICC supports ISO/IEC 14443-4	Acknowledge SEL_t
command	HLTA_t	(00011NNN)b, (NNN=CID_t No.(0-7)) (00111NNN)b, (NNN+8=CID_t No.(8-15))	Halt the PICC with its CID_t
Response	Answer to HLTA_t	(00000110)b (= '06')	Acknowledge HLTA_t

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 127

Parameters of REQ-ID Command

Parameters		Meaning
P1	b8-b7	Timeslot length, b7=1: for 8-byte UID, b8=0
	b6-b1	Number of timeslots, b3=1:for 4 timeslots, Others=0
P2		'00'

C.5 Timeslot anticollision sequence

The flow chart of PICC anticollision sequence is shown as below in Figure C.1.

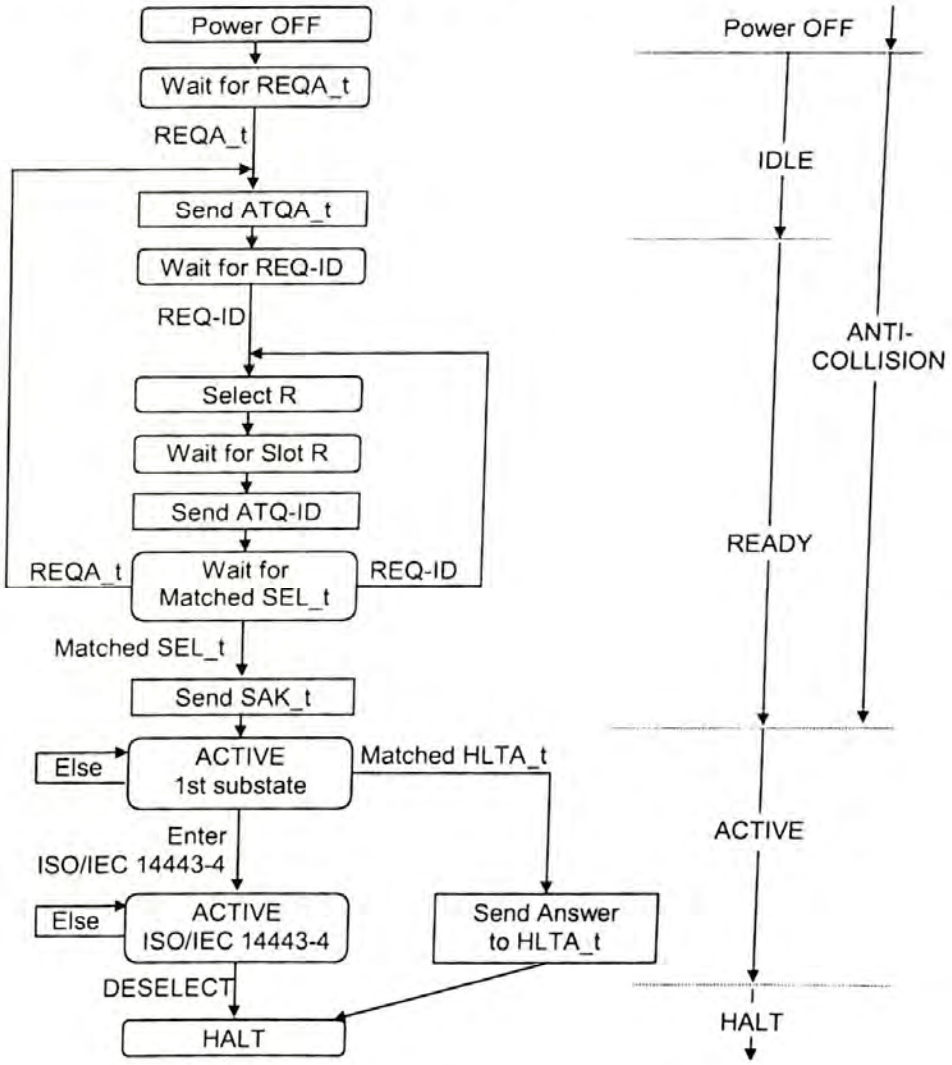



Figure C.1 — Flow chart of PICC anticollision sequence

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO
IPR2025-01234
Apple EX1032 Page 120

Annex D
(informative)

Type B - Example of Anticollision Sequence


NOTE Type B anticollision is a flexible set of commands to allow the anticollision strategy to be developed for the application.

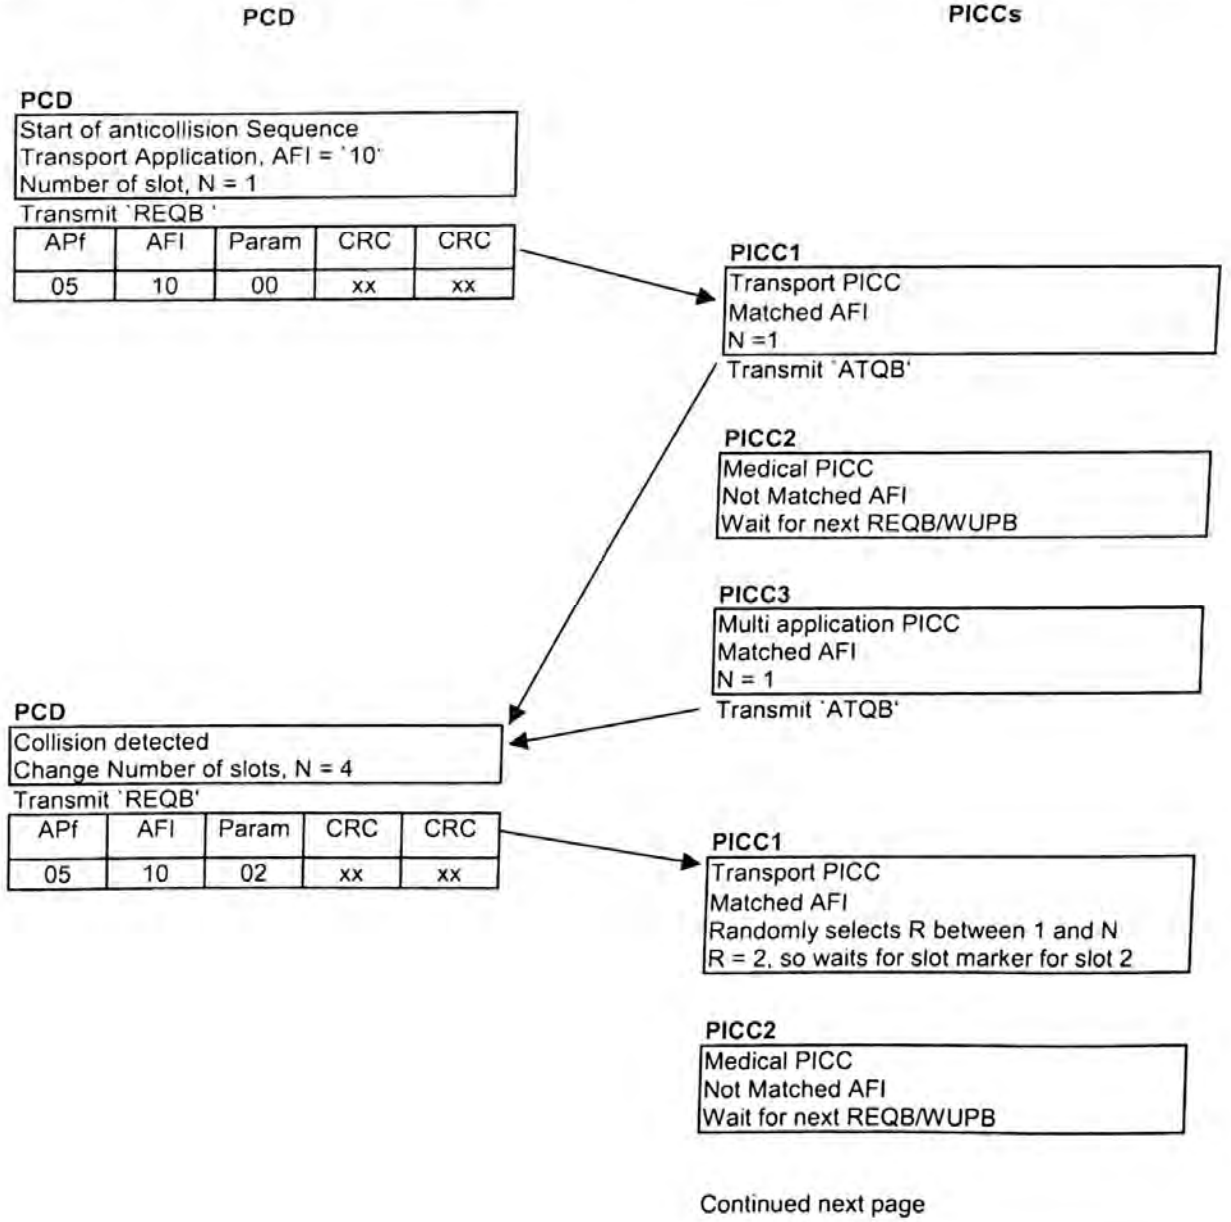

Continued next page

© ISO/IEC 2001 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMTense with ISO

IPR2025-01234
Apple EX1033 Page 129

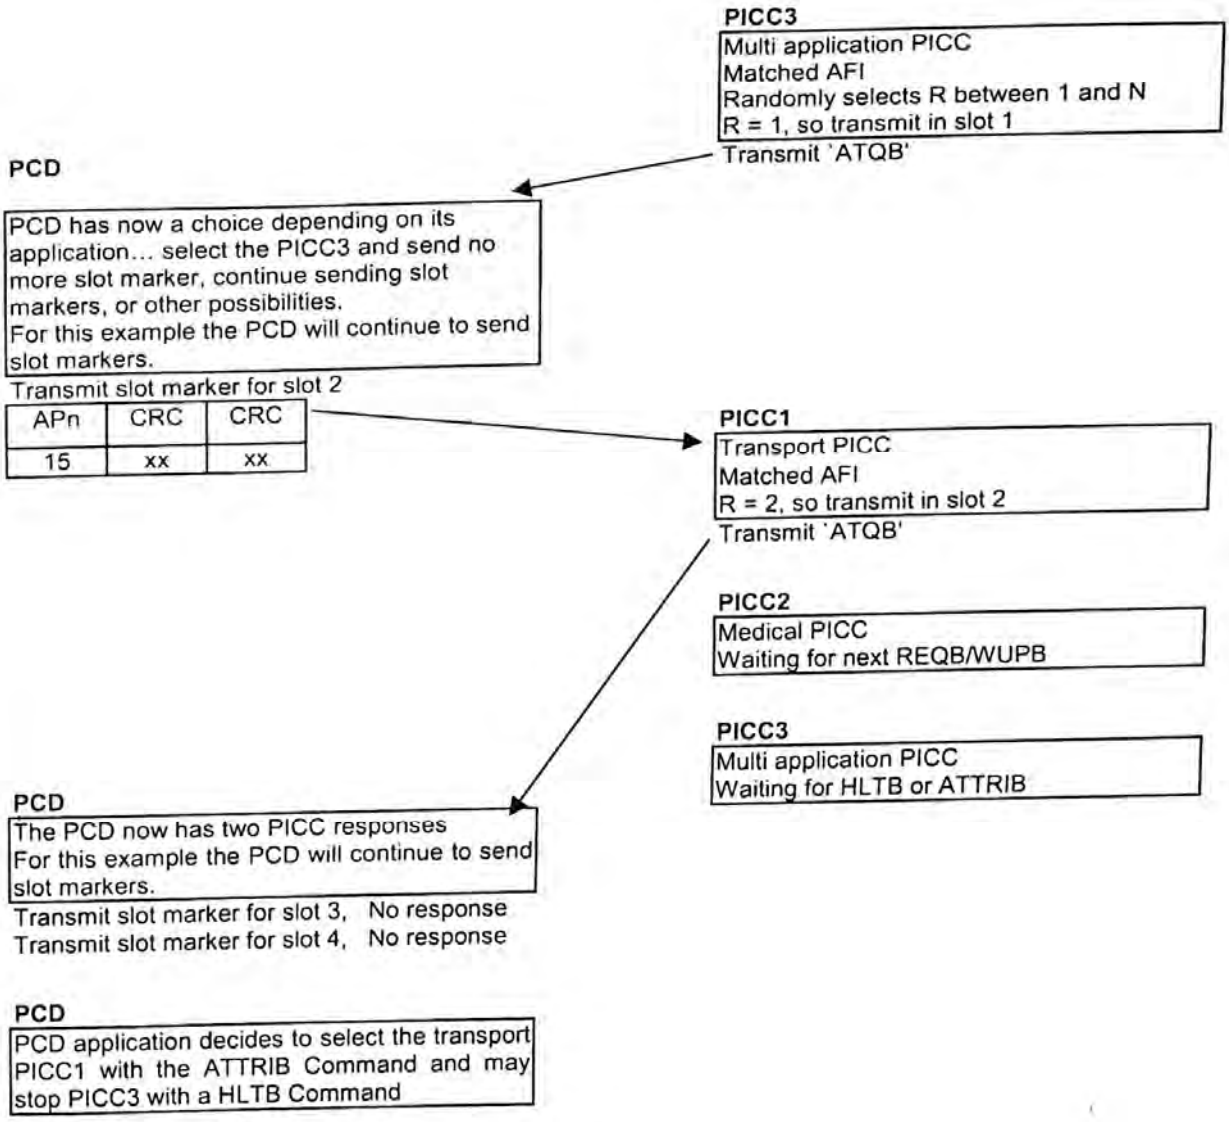

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
© ISO/IEC 2001 – All rights reserved
Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2006/5/7 17:48:2 GMTense with ISO
IPR2025-01234
Apple EX1033 Page 130

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale,2008/5/7 17:48:2 GMTense with ISO

ICS 35.240.15

Price based on 48 pages

© ISO/IEC 2001 – All rights reserved

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Sold to PENN STATE UNIVERSITY (DA), 01697985
Not for Resale 2008/5/7 17:48:2 GMT+se with ISO

INTERNATIONAL STANDARD

ISO/IEC 14443-3

First edition
2001-02-01

AMENDMENT 1
2005-06-01

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 3: Initialization and anticollision —

AMENDMENT 1: Bit rates of *fc*/64, *fc*/32 and *fc*/16

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 3: Initialisation et anticollision

AMENDEMENT 1: Débits binaires de fc/64, fc/32 et fc/16

Reference number
ISO/IEC 14443-3:2001/Amd.1:2005(E)

© ISO/IEC 2005

IPR2025-01234
Apple EX1033 Page 133

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 134

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO/IEC 14443-3:2001 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 135

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 3: Initialization and anticollision

AMENDMENT 1: Bit rates of *fc*/64, *fc*/32 and *fc*/16

Page 2, term number 3.5

Replace the existing definition with the following:

"**elementary time unit**
etu
time unit calculated by the following formula:

1 etu = 128 / (D x *fc*)

where

D ∈ {1,2,4,8}

fc is the carrier frequency as defined in ISO/IEC 14443-2.

The initial value of the divisor D is 1, giving the initial etu as follows: 1 etu = 128 / *fc*.

Page 3, Clause 4

Add the following new abbreviations:

"D Divisor

TR2 Frame delay Time PICC to PCD, Type B"

Page 5, Clause 5

Replace the existing Clause 5 title with the following:

"

5 Alternating between Type A and Type B commands,

5.1 Polling

"

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 136

Add the following at the end of the new subclause 5.1:

"EXAMPLE 3 When a PICC Type A is exposed to field activation it shall be able to accept a REQA within 5 ms of unmodulated operating field.

EXAMPLE 4 When a PICC Type B is exposed to field activation it shall be able to accept a REQB within 5 ms of unmodulated operating field.

5.2 Influence of Type A commands on PICC Type B operation

A PICC Type B should either go to IDLE state (be able to accept a REQB) or be able to continue a transaction in progress after receiving any Type A command.

5.3 Influence of Type B commands on PICC Type A operation

A PICC Type A should either go to IDLE state (be able to accept a REQA) or be able to continue a transaction in progress after receiving any Type B command.

5.4 Transition to Power OFF state

The PICC shall be in the Power OFF state no later than 5 ms after the operating field is switched off."

Page 5, Clause 6

Insert the following new subclause before the existing subclause 6.1 and renumber all subsequent subclauses.

"**6.1 Bit rates**

Communication between PCD and PICC can be achieved with four different bit rates (see Table Amd.1-1).

Bit rates of *fc*/64, *fc*/32 and *fc*/16 are optional and may be independently supported by PCD and PICC.

Table Amd.1-1 — Bit rates

Divisor D	etu	Bit rate
1	128/*fc* (~9,4 µs)	*fc*/128 (~106 kbit/s)
2 (optional)	128/(2*fc*) (~4,7 µs)	*fc*/64 (~212 kbit/s)
4 (optional)	128/(4*fc*) (~2,4 µs)	*fc*/32 (~424 kbit/s)
8 (optional)	128/(8*fc*) (~1,2 µs)	*fc*/16 (~847 kbit/s)

NOTE The initial bit rate is fc/128. This applies for the whole initialization and anticollision sequence."

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 137

Page 6, subclause 6.1.2 (renumbered to 6.2.2)

Replace Figure 1 with the following:

"

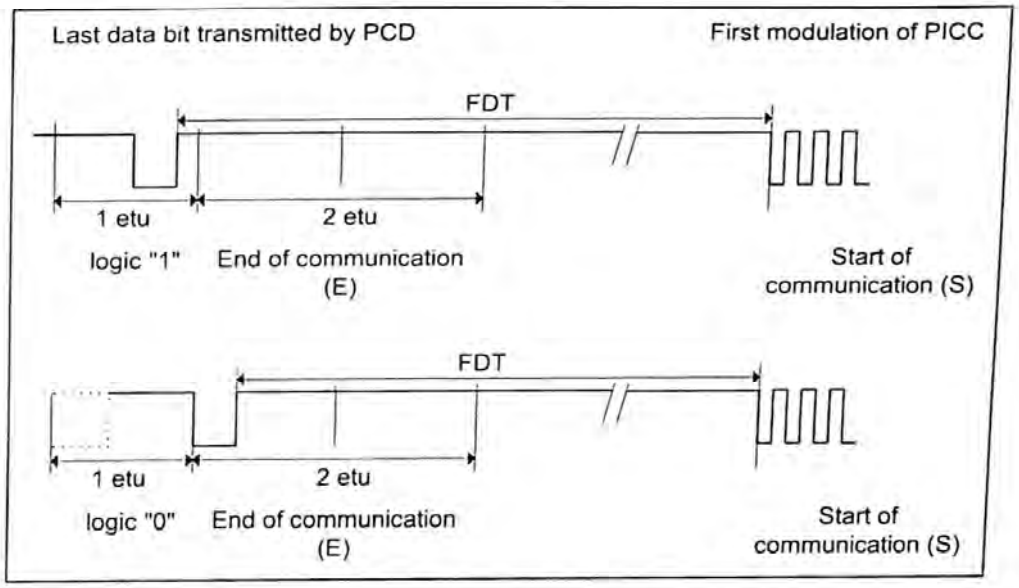


Figure 1 — Frame delay time PCD to PICC"

Replace Table 1 and the last two sentences of subclause 6.1.2 (renumbered to 6.2.2) with the following:

"Table 1 — Frame delay time PCD to PICC

Command type		n (integer value)	FDT	
			last bit = (1)b	last bit = (0)b
REQA Command WUPA Command ANTICOLLISION Command SELECT Command		9	(*n**128+84)/*fc* [= 1236/*fc*]	(*n**128+20)/*fc* [= 1172/*fc*]
All other commands at bit rates				
PCD to PICC	PICC to PCD			
fc/128	*fc*/128	≥ 9	(*n**128+84)/*fc*	(*n**128+20)/*fc*
fc/64		≥ 8	(*n**128+148)/*fc*	(*n**128+116)/*fc*
fc/32		≥ 8	(*n**128+116)/*fc*	(*n**128+100)/*fc*
fc/16		≥ 8	(*n**128+100)/*fc*	(*n**128+92)/*fc*
fc/128 or *fc*/64 or *fc*/32 or *fc*/16	*fc*/64 or *fc*/32 or *fc*/16	Not applicable	≥ 1116/*fc*	≥ 1116/*fc*
All PICCs in the field shall respond in a synchronous way to the commands REQA, WUPA, ANTICOLLISION and SELECT. This is needed for anticollision.				

The FDT tolerance is in the range of -0 to +0,4 µs (derived from t4 defined in ISO/IEC 14443-2:2001, Figure 3)."

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 138

Page 7, subclause 6.1.5.2 (renumbered to 6.2.5.2)

Add the following text and figure after Figure 3:

"

As an exception the last parity bit of a PICC standard frame shall be inverted if this frame is transmitted with bit rate of *fc*/64, *fc*/32 or *fc*/16 (see Figure Amd.1-1).

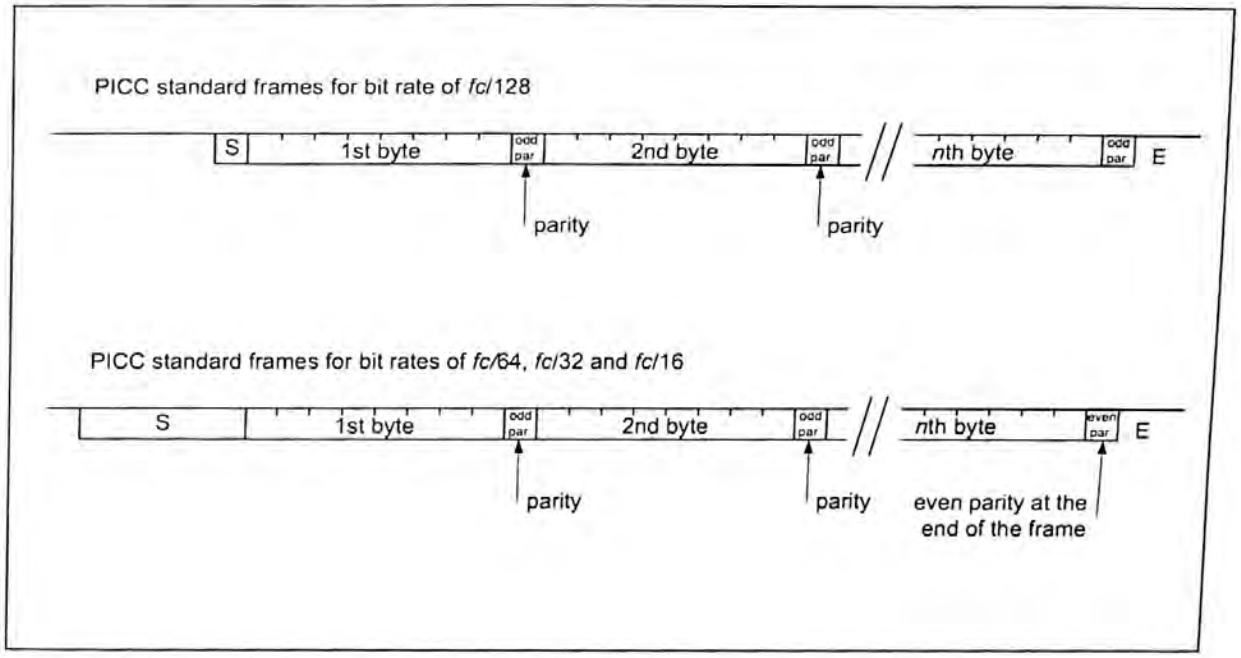


Figure Amd.1-1 — PICC standard frames"

Page 10, subclause 6.2 (renumbered to 6.3)

Add the following text between the lines beginning DESELECT and Error:

"RATS RATS Command defined in ISO/IEC 14443-4"

Page 10, Figure 6

Replace the text "ISO/IEC 14443-4" in the state bubble with "PROTOCOL state" and replace the text "Enter ISO/IEC 14443-4" between the arrows with "RATS".

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 139

Page 14, Clause 6.4.1 (renumbered to 6.5.1)

Replace Figure 8 with the following figure:

"

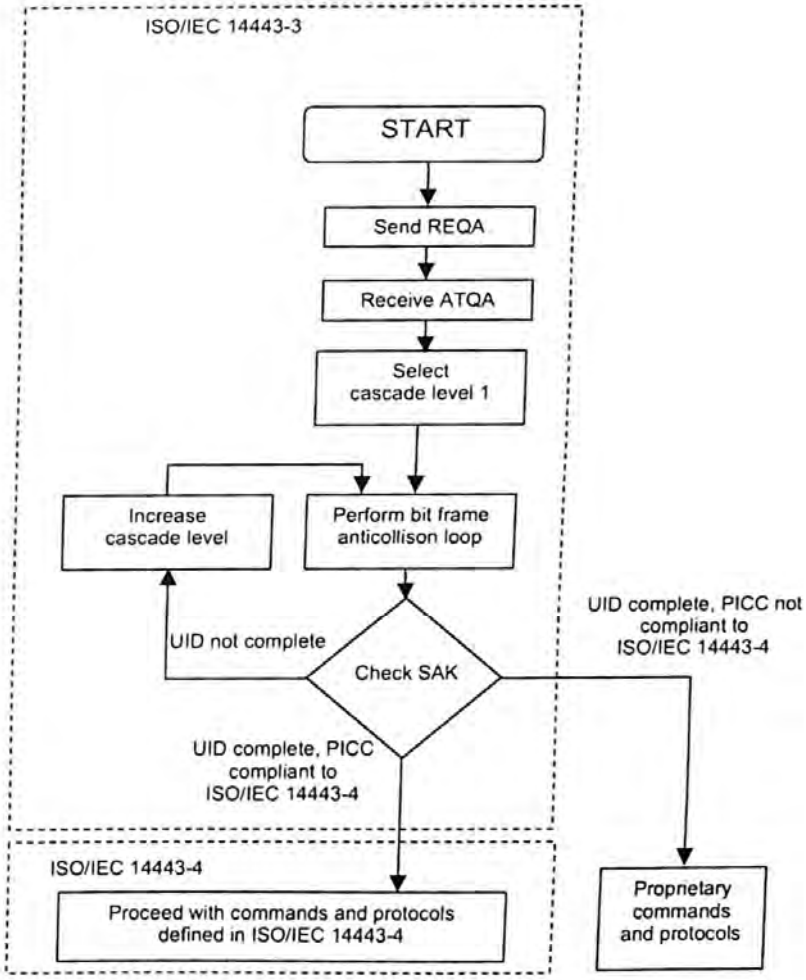


Figure 8 — Initialization and anticollision flowchart for PCD"

Page 14, subclause 6.4.1 (renumbered 6.5.1)

Add the following note and text after modified Figure 8:

"NOTE PICCs may use ATQA bit combinations of b9 to b12 for indication of proprietary methods.

PICCs that do not support the mandatory bit frame anticollision are not compliant with this standard."

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 140

Page 15, subclause 6.4.2.2 (renumbered 6.5.2.2)

Delete "NOTE Bit 9 to bit 12 indicate additional and proprietary methods"

Page 18, subclause 6.4.3.4 (renumbered 6.5.3.4)

Add the following note after Table 8:

"NOTE x represents a proprietary value"

Page 19, subclause 6.4.4 (renumbered 6.5.4)

Replace Table 10 with the following:

"Table 10 — Single size UIDs

uid0	Description
'08'	uid1 to uid3 is a random number which is dynamically generated
'x0' - 'x7'	Proprietary number
'x9' - 'xE'	Proprietary number
'18', '28', '38', '48', '58', '68', '78', '98', 'A8', 'B8', 'C8', 'D8', 'E8', 'F8'	RFU
'xF'	RFU

"

Add the following sentence after Table 11:

"The value '88'of the cascade tag CT shall not be used for uid3 in double size UID."

Page 21, subclause 7.1.1

Replace the last sentence by the following text and table.

"From PCD to PICC, bit boundaries within a character shall occur between (n - 0,125) etu and (n + 0,125) etu where n is the number of bit boundaries after the start bit falling edge ($1 \leq n \leq 9$).

From PICC to PCD, bit boundaries within a character shall only occur at nominal positions of rising or falling edges of the subcarrier as specified in ISO/IEC 14443-2:

Table Amd.1-2 — Bit boundaries from PICC to PCD

	PICC to PCD bit rate			
	***fc*/128** (1 etu = 8/*fs*)	***fc*/64** (1 etu = 4/*fs*)	***fc*/32** (1 etu = 2/*fs*)	***fc*/16** (1 etu = 1/*fs*)
Bit boundaries from PICC to PCD	n etu $\pm$ 1/*fs*	n etu $\pm$ 1/(2*fs*)	n etu	n etu

"

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 141

Page 21, subclause 7.1.2

Replace the existing text by the following:

"A character is separated from the next one by the extra guard time EGT.

The EGT between 2 consecutive characters sent by the PCD to the PICC shall be between 0 and 6 etu (not necessarily an integer number of etu).

The EGT between 2 consecutive characters sent by the PICC to the PCD shall be between 0 and 2 etu (not necessarily an integer number of etu)."

Page 22, subclause 7.1.6

Replace the third paragraph with the following:

"The maximum value of TR0 is 256/*fs* for ATQB only and $(256/fs)*2^{FWI}$ – TR1 for all other frames (see 7.9.4.3)."

Page 22, subclause 7.1.6

Insert the following warning notice after the new third paragraph for consistency with ISO/IEC 14443-4:2001, 7.2, Frame waiting time:

"WARNING — The value of TR0 is changed from ISO/IEC 14443-3:2001. TR0 is reduced by TR1 in the new definition of TR0. PCDs waiting no more than this new value of TR0 may not communicate properly with Type B PICCs based on ISO/IEC 14443-3:2001."

Page 23, subclause 7.1.7

Replace the last sentence with the following:

"The minimum value of TR2 is coded in ATQB by Protocol_type in "Protocol Info" field (see 7.9.4.4)."

Replace Figure 17 with the following: "

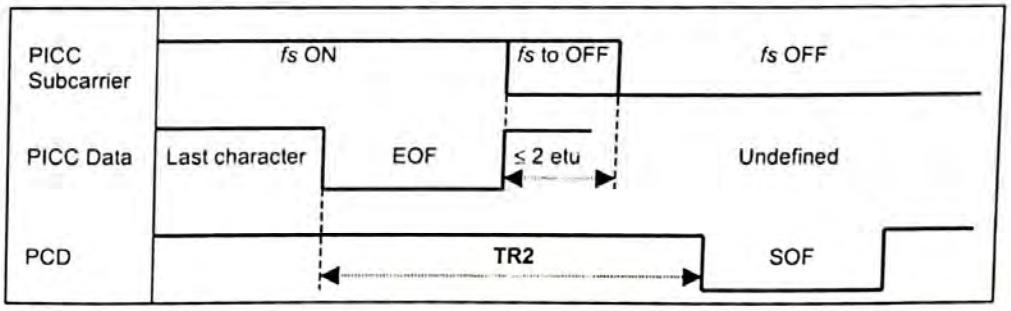


Figure 17 — PICC to PCD EOF"

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 142

Page 33, subclause 7.9.4.4

Replace 7.9.4.4 with the following.

"**7.9.4.4 Protocol_Type**

Table Amd.1-3 — Compliance with ISO/IEC 14443-4

b1	Meaning
1	PICC compliant with ISO/IEC 14443-4
0	PICC not compliant with ISO/IEC 14443-4

The minimum value of TR2 (delay between PICC EOF start and PCD SOF start) is defined by Protocol_Type bits (b3,b2) as specified in Table Amd.1-4.

Table Amd.1-4 — Minimum TR2 coding

b3	b2	Minimum TR2 for PICC to PCD bit rate of			
		fc/128 (1 etu = 8/*fs*)	*fc*/64 (1 etu = 4/*fs*)	*fc*/32 (1 etu = 2/*fs*)	*fc*/16 (1 etu = 1/*fs*)
0	0	10 etu + 32/*fs*	10 etu + 32/*fs*	10 etu + 32/*fs*	10 etu + 32/*fs*
0	1	10 etu + 32/*fs*	10 etu + 32/*fs*	10 etu+ 32/*fs*	26 etu
1	0	10 etu + 32/*fs*	10 etu+ 32/*fs*	18 etu	18 etu
1	1	10 etu + 32/*fs*	14 etu	14 etu	14 etu

The bit b4 is RFU and shall be set to 0."

Page 33, subclause 7.10

Add the following sentence before 7.10.1:

"The parameters selected in the ATTRIB command shall apply after the Answer to ATTRIB."

Page 34, subclause 7.10.3.1

Replace Table 20 with the following:

"Table 20 — Minimum TR0 coding

b8	b7	Minimum TR0 for PCD to PICC bit rate of			
		fc/128	*fc*/64	*fc*/32	*fc*/16
0	0	64/*fs*	64/*fs*	64/*fs*	64/*fs*
0	1	48/*fs*	32/*fs*	16/*fs*	16/*fs*
1	0	16/*fs*	8/*fs*	4/*fs*	4/*fs*
1	1	RFU	RFU	RFU	RFU

"

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 143

Page 34, subclause 7.10.3.2

Replace Table 21 with the following:

"**Table 21 — Minimum TR1 coding**

b6	b5	Minimum TR1 for PCD to PICC bit rate of			
		***fc*/128**	***fc*/64**	***fc*/32**	***fc*/16**
0	0	80/*fs*	80/*fs*	80/*fs*	80/*fs*
0	1	64/*fs*	32/*fs*	32/*fs*	32/*fs*
1	0	16/*fs*	8/*fs*	8/*fs*	8/*fs*
1	1	RFU	RFU	RFU	RFU

"

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 144

ICS 35.240.15

Price based on 9 pages

© ISO/IEC 2005 – All rights reserved

IPR2025-01234
Apple EX1033 Page 145

INTERNATIONAL STANDARD

ISO/IEC 14443-3

First edition
2001-02-01

AMENDMENT 3
2006-03-15

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 3: Initialization and anticollision

AMENDMENT 3: Handling of reserved fields and values

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 3: Initialisation et anticollision

AMENDEMENT 3: Maniement de champs et valeurs réservés

Reference number
ISO/IEC 14443-3:2001/Amd.3:2006(E)

© ISO/IEC 2006

IPR2025-01234
Apple EX1033 Page 146

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 147

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 3 to ISO/IEC 14443-3:2001 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

As part of maintaining ISO/IEC 14443-3:2001, a need was raised to better clarify the handling of fields and values reserved by ISO/IEC for future use. This Amendment addresses the required document enhancements.

ISO/IEC 14443-3:2001 defines certain fields and values as Reserved for Future Use (RFU) by new ISO/IEC rules that may be added in later versions. This Amendment includes clarification that products that comply to ISO/IEC 14443-3:2001 shall not improperly use RFU fields and values, plus documentation of product behaviour, that when followed by PICC and PCD designs commenced after publication of ISO/IEC 14443-3:2001, should assist with backward compatibility and interoperability for future definition by ISO of RFU fields and values. Consequently, many of the references to "should" may be changed into a definitive "shall" in the second edition; thus, it is recommended to implement them at this time.

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 148

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 3: Initialization and anticollision

AMENDMENT 3: Handling of reserved fields and values

Page 4, Clause 4 "Symbols and abbreviated terms"

Add the following abbreviations after the SELECT line:

"SFGI Start-up Frame Guard time Integer

SFGT Start-up Frame Guard Time"

Page 11, Subclause 6.2.3 (renumbered to 6.3.3) "READY State"

Replace the first sentence with the following:

"In the READY State, the bit frame anticollision method shall be applied."

Page 11, Subclause 6.2.6 (renumbered to 6.3.6) "READY State"*

Replace the first sentence with the following:

"The READY* State is similar to the READY State. The bit frame anticollision method shall be applied."

Page 12, Subclause 6.3.1 (renumbered to 6.4.1) "REQA and WUPA commands"

Add the following paragraphs below Table 2 "Coding of Short Frame", as the last paragraphs in the subclause:

"A PCD sending an RFU value is not compliant with this standard.

A PICC receiving an RFU value should consider the short frame as an error (see Figure 6) and should not send a response."

Page 15, Subclause 6.4.2.1 (renumbered to 6.5.2.1) "Coding of ATQA"

Add the following as the last paragraphs in the subclause:

"A PICC sending an ATQA with (b8,b7) = (11)b or (b16 to b13) <> (0000)b or b6 <> (0)b is not compliant with this standard.

A PCD detecting a collision in any bit of (b16 to b1) shall commence with the first step of the anticollision loop (see Subclause 6.5.3.1).

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 149

The PCD shall commence with the first step of the anticollision loop regardless of any value in the proprietary field b12 to b9.

A PCD receiving (b8,b7) = (11)b or (b16 to b13) <> (0000)b or b6 <> (0)b should ignore the values and should commence with the first step of the anticollision loop (see Subclause 6.5.3.1)."

Page 18, Subclause 6.4.3.3 (renumbered to 6.5.3.3) "Coding of NVB (Number of Valid Bits)"

Add the following paragraphs below Table 7 "Coding of NVB", as the last paragraphs in the subclause:

"The PCD shall set NVB only to values defined in Table 7 except that for byte counts 6 and 7 only bit count of 0 is allowed. A PCD setting NVB to any forbidden value is not compliant with this standard.

A PCD setting the byte count (b8 to b5) to any value outside the range 2 to 7 is not compliant with this standard.

A PCD setting the bit count (b4 to b1) > 7 for byte count equal 2 to 5 or setting the bit count (b4 to b1) to any value other than 0 for byte count equal 6 or 7 is not compliant with this standard."

Page 19, Subclause 6.4.3.4 (renumbered to 6.5.3.4) "Coding of SAK (Select acknowledge)"

Add the following below Table 8 "Coding of SAK", as the last paragraphs in the subclause:

"NOTE 'x' in this table means 'a don't care value'.

For b3 = (1)b the PCD shall ignore any other bit of SAK. For b3 = (0)b the PCD shall interpret b6 and shall ignore any of the remaining bits of SAK. A PCD behaving differently is not compliant with this standard."

Page 20, Subclause 6.4.4 (renumbered to 6.5.4) "UID contents and cascade levels"

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC sending uid0 with an RFU value is not compliant with this standard. A PICC sending a proprietary number shall fulfil all other requirements of the anticollision sequence including CT, otherwise such a PICC is not compliant with this standard.

During the anticollision, the PCD shall regard uid0 with RFU or proprietary values as a regular uid0."

Page 21, Subclause 7.1.3 "Frame format"

Remove the last sentence "See 7.10.3 for exceptions."

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 150

Page 29, Subclause 7.7.3 "Coding of AFI"

Replace the last row in Table 12 "AFI coding" with the following:

"

'9'-'D'	'0',Y	RFU	
'E'	'0',Y	Machine Readable Travel Documents (MRTDs)	Y=1 Passport Y=2 Visa Other Y values RFU
'F'	'0',Y	RFU	

"

Add the following paragraph as the last paragraph in the subclause:

"A PCD sending a REQB/WUPB command with an AFI field set to an RFU value is not compliant with this standard.

The PICC shall not respond when the AFI field is set to a value which is RFU."

Page 29, Subclause 7.7.4 "Coding of PARAM"

Replace Figure 21 with the following figure:

"

b8	b7	b6	b5	b4	b3	b2	b1
RFU			Extended ATQB supported	REQB / WUPB	N (Number of slots)		

All RFU bits shall be set to 0.

Figure 21 — Coding of PARAM

"

Replace definition before Table 13 with the following:

"b4 = 0 defines REQB: PICCs in IDLE state or READY state shall process this command.
b4 = 1 defines WUPB: PICCs in IDLE state or READY state or HALT state shall process this command.
b1, b2 and b3 are used to code the number of slots N according to Table 13.
b5 indicates the PCD capability to support extended ATQB response from the PICC. The use of extended ATQB is optional for the PICC. The coding of b5 is as follows:

— b5 = 0 defines: extended ATQB defined in subclause 7.9.4.7 is not supported by the PCD.

— b5 = 1 defines: extended ATQB defined in subclause 7.9.4.7 is supported by the PCD."

Add the following paragraphs as the last paragraphs in the subclause before Table 13:

"A PCD sending a REQB/WUPB command with (b8 to b6) <> (000)b is not compliant with this standard.

The PICC should ignore (b8 to b6) and its interpretation of any other field of the whole frame shall not change."

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 151

Page 30, Subclause 7.7.4 "Coding of PARAM"

Add the following paragraphs after Table 13 "Coding of N":

"A PCD sending (b3 to b1) = (101)b or (11x)b is not compliant with this standard.

Until the RFU values (101)b or (11x)b are assigned by ISO, a PICC receiving (b3 to b1) = (101)b or (11x)b should interpret it as (b3 to b1) = (100)b (16 slots)."

Page 32, Subclause 7.9.4 "Protocol Info"

Replace figure 25 with the following figure:

"

1st byte	2nd byte		3rd byte			4th byte (optional) Extended ATQB	
Bit_Rate_capability (8 bits)	Max_Frame_Size (4 bits)	Protocol_Type (4 bits)	FWI (4 bits)	ADC (2 bits)	FO (2 bits)	SFGI (4 bits)	RFU (4 bits)
MSB LSB	MSB	LSB	MSB		LSB	MSB	LSB

All RFU bits shall be set to 0.

Figure 25 — Protocol Info format

"

Page 32, Subclause 7.9.4.2 "ADC"

Add the following paragraph as the last paragraph in the subclause:

"A PICC setting (b4,b3) any value other than (00)b or (01)b is not compliant with this standard."

Page 32, Subclause 7.9.4.3 "FWI"

Add the following paragraphs after the FWI definitions:

"In case of extended ATQB supported by the PICC and the PCD,

— FWT applies after the Answer to ATTRIB command,

— the waiting time for the Answer to ATTRIB command is a fixed value given by the formula

Answer to ATTRIB waiting time = $(256 \times 16/fc) \times 2^4$ (~ 4,8 ms).

It is strongly recommended to use a FWT as low as possible to protect communications speed when retry occurs."

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC setting FWI = 15 is not compliant with this standard.

Until the RFU value 15 is assigned by ISO, a PCD receiving FWI = 15 should interpret it as FWI = 4.

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 152

NOTE This clause is added for PCD's compatibility with future PICCs when ISO defines the behaviour for an RFU value of 15."

Page 33, Subclause 7.9.4.4 "Protocol_Type"

Add the following paragraph as the last paragraph in the subclause:

"The PCD should not continue communicating with a PICC that sets b4 to (1)b."

Page 33, Subclause 7.9.4.5 "Max_Frame_Size"

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC setting Maximum Frame Size Code = '9'-'F' is not compliant with this standard.

Until the RFU values '9'-'F' are assigned by ISO, a PCD receiving Maximum_Frame_Size Code = '9'-'F' should interpret it as Maximum Frame Size Code = '8' (256 bytes).

NOTE This clause is added for PCD's compatibility with future PICCs when ISO defines the behaviour for a RFU values of '9'-'F'."

Page 33, Subclause 7.9.4.6 "Bit_Rate_capability"

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC setting b4 = 1 is not compliant with this standard.

Until the RFU values with b4 = 1 are assigned by ISO, a PCD receiving Bit_Rate_capability with b4 = 1 should interpret the Bit_Rate_capability byte as if b8 to b1 = 0 (only ~106 kbit/s in both directions)."

Page 33, Add the following subclause before Subclause 7.10:

"**7.9.4.7 Extended ATQB (optional)**

The optional Extended ATQB byte (optional 4th byte of protocol info field) consists of two parts:

— the least significant half byte (b4 to b1) is RFU and shall be set to (0000)b;

— the most significant half byte (b8 to b5) defines the Start-up Frame Guard time Integer (SFGI).

The SFGI codes an integer value used to define the Start-up Frame Guard Time (SFGT).

The SFGT defines a specific guard time needed by the PICC before it is ready to receive the next frame after it has sent the Answer to ATTRIB command. SFGI is coded in the range from 0 to 14. The value of 15 is RFU. The values in the range from 0 to 14 are used to calculate the SFGT with the formula given below. The default value of SFGI is 0.

$$SFGT = (256 \times 16/fc) \times 2^{SFGI}$$

For SFGI = 0, SFGT is minimal (~ 302 µs).

For SFGI = 14, SFGT is maximal (~ 4949 ms).

A PICC setting SFGI = 15 is not compliant with this standard.

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 153

Until the RFU value 15 is assigned by ISO, a PCD receiving SFGI = 15 shall interpret it as SFGI = 0.

A PICC sending an ATQB response with (b4 to b1) <> (0000)b is not compliant with this standard.

The PCD shall ignore (b4 to b1) and its interpretation of any other field of the whole frame shall not change. A PCD changing its interpretation of any other field of the whole frame when (b4 to b1) <> (0000)b is not compliant with this standard.

When answering a REQB/WUPB command with bit b5 set to 0 (no extended ATQB supported), the PICC shall not send the optional 4th byte in its ATQB response."

Page 34, Subclause 7.10.3 "Coding of Param 1"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting (b2,b1) <> (00)b is not compliant with this standard.

The PICC should ignore any value (b2,b1) and its interpretation of any other field of the whole frame shall not change."

Page 34, Subclause 7.10.3.1 "Minimum TR0"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting (b8,b7) = (11)b is not compliant with this standard.

Until the RFU value (11)b is assigned by ISO, a PICC receiving (b8,b7) = (11)b should interpret it as (b8,b7) = (00)b, the default value."

Page 34, Subclause 7.10.3.2 "Minimum TR1"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting (b6,b5) = (11)b is not compliant with this standard.

Until the RFU value (11)b is assigned by ISO, a PICC receiving (b6,b5) = (11)b should interpret it as (b6,b5) = (00)b, the default value."

Page 35, Subclause 7.10.3.3 "EOF/SOF"

Add the following paragraph as the last paragraph in the subclause after Table 23:

"SOF/EOF suppression applies only for communications at *fc*/128 (~106 kbit/s). For bit rates higher than fc/128 (~106 kbit/s) the PICC shall always provide SOF and EOF."

Page 35, Subclause 7.10.4 "Coding of Param 2"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting Maximum Frame Size Code = '9'-'F' is not compliant with this standard.

Until the RFU values '9'-'F' are assigned by ISO, a PICC receiving Maximum Frame Size Code = '9'-'F' should interpret it as Maximum_Frame_Size Code = '8' (256 bytes)."

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 154

Page 35, Subclause 7.10.5 "Coding of Param 3"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting (b8 to b5) <> (0000)b is not compliant with this standard.

The PICC should ignore and not answer the ATTRIB command when (b8 to b5) <> (0000)b."

Page 36, Subclause 7.10.6 "Coding of Param 4"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting CID = 15 is not compliant with this standard.

The PICC should ignore and not answer the ATTRIB command when received value of CID = 15, as any action in the PICC for CID = 15 may be decided in the future by ISO.

A PCD setting (b8 to b5) <> (0000)b is not compliant with this standard.

The PICC should ignore (b8 to b5) and its interpretation of any other field of the whole frame shall not change."

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 155

ICS 35.240.15
Price based on 7 pages

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 156

INTERNATIONAL STANDARD ISO/IEC 14443-3:2001/Amd.1:2005
TECHNICAL CORRIGENDUM 1

Published 2006-09-01

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 3: Initialization and anticollision

AMENDMENT 1: Bit rates of *fc*/64, *fc*/32 and *fc*/16

TECHNICAL CORRIGENDUM 1

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 3: Initialisation and anticollision

AMENDEMENT 1: Débit binaires de fc/64, fc/32 et fc/16

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to ISO/IEC 14443-3:2001/Amd.1:2005 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

ICS 35.240.15 **Ref. No. ISO/IEC 14443-3:2001/Amd.1:2005/Cor.1:2006(E)**

© ISO/IEC 2006 – All rights reserved

Published in Switzerland

IPR2025-01234
Apple EX1033 Page 157

Page 8, new Subclause 7.9.4.4

Replace Table Amd.1-4 with the following:

Table Amd.1-4 — Minimum TR2 coding

b3	b2	Minimum TR2 for PICC to PCD bit rate of			
		fc/128 (1 etu = 8/*fs*)	*fc*/64 (1 etu = 4/*fs*)	*fc*/32 (1 etu = 2/*fs*)	*fc*/16 (1 etu = 1/*fs*)
0	0	10 etu + 32/*fs*	10 etu + 32/*fs*	10 etu + 32/*fs*	10 etu + 32/*fs*
0	1	10 etu + 128/*fs*	10 etu + 128/*fs*	10 etu + 128/*fs*	10 etu + 128/*fs*
1	0	10 etu + 256/*fs*	10 etu + 256/*fs*	10 etu + 256/*fs*	10 etu + 256/*fs*
1	1	10 etu + 512/*fs*	10 etu + 512/*fs*	10 etu + 512/*fs*	10 etu + 512/*fs*

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 158

INTERNATIONAL STANDARD

ISO/IEC 14443-4

First edition
2001-02-01

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 4: Transmission protocol

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 4: Protocole de transmission

Reference number
ISO/IEC 14443-4:2001(E)

© ISO/IEC 2001

IPR2025-01234
Apple EX1033 Page 159

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 160

Contents

1 Scope 1
2 Normative references 1
3 Terms and definitions 1
4 Symbols and abbreviated terms 2
5 Protocol activation of PICC Type A 4
5.1 Request for answer to select 6
5.2 Answer to select 6
5.2.1 Structure of the bytes 7
5.2.2 Length byte 7
5.2.3 Format byte 7
5.2.4 Interface byte TA(1) 8
5.2.5 Interface byte TB(1) 8
5.2.6 Interface byte TC(1) 9
5.2.7 Historical bytes 9
5.3 Protocol and parameter selection request 10
5.3.1 Start byte 10
5.3.2 Parameter 0 11
5.3.3 Parameter 1 11
5.4 Protocol and parameter selection response 12
5.5 Activation frame waiting time 12
5.6 Error detection and recovery 12
5.6.1 Handling of RATS and ATS 12
5.6.2 Handling of PPS request and PPS response 13
5.6.3 Handling of the CID during activation 13
6 Protocol activation of PICC Type B 14
7 Half-duplex block transmission protocol 14
7.1 Block format 15
7.1.1 Prologue field 15
7.1.2 Information field 17
7.1.3 Epilogue field 18
7.2 Frame waiting time 18
7.3 Frame waiting time extension 18
7.4 Power level indication 19
7.5 Protocol operation 20
7.5.1 Multi-Activation 20
7.5.2 Chaining 20
7.5.3 Block numbering rules 21
7.5.4 Block handling rules 21
7.5.5 Error detection and recovery 22
8 Protocol deactivation of PICC Type A and Type B 23
8.1 Deactivation frame waiting time 23
8.2 Error detection and recovery 23
Annex A (informative) Multi-Activation example 24
Annex B (informative) Protocol scenarios 25
B.1 Notation 25
B.2 Error-free operation 25
B.2.1 Exchange of I-blocks 25
B.2.2 Request for waiting time extension 26

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 161

B.2.3 DESELECT 26
B.2.4 Chaining 26
B.3 Error handling 27
B.3.1 Exchange of I-blocks 27
B.3.2 Request for waiting time extension 28
B.3.3 DESELECT 30
B.3.4 Chaining 30

Annex C (informative) Block and frame coding overview 33

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 162

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 14443-4 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Identification cards and related devices*.

ISO/IEC 14443 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit(s) cards — Proximity cards*:

— *Part 1: Physical characteristics*

— *Part 2: Radio frequency power and signal interface*

— *Part 3: Initialization and anticollision*

— *Part 4: Transmission protocol*

Annexes A, B and C of this part of ISO/IEC 14443 are for information only.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 163

Introduction

ISO/IEC 14443 is one of a series of International Standards describing the parameters for identification cards as defined in ISO/IEC 7810, and the use of such cards for international interchange.

The protocol as defined in this part of ISO/IEC 14443 is capable of transferring the application protocol data units as defined in ISO/IEC 7816-4. Thus application protocol data units may be mapped as defined in ISO/IEC 7816-4 and application selection may be used as defined ISO/IEC 7816-5.

ISO/IEC 14443 is intended to allow operation of proximity cards in the presence of other contactless cards conforming to ISO/IEC 10536 and ISO/IEC 15693.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this part of ISO/IEC 14443 may involve the use of patents.

ISO and IEC take no position concerning the evidence, validity and scope of this patent right.

The holders of these patent rights have assured ISO and IEC that they are willing to negotiate licences under reasonable and non discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of patent rights are registered with ISO and IEC. Information may be obtained from:

US Patent US5359323	FRANCE TELECOM Centre National d'Etudes des Télécommunications 38-40 rue de Général Leclerc 92794 Issy-les-Molineaux Cedex 9 France MOTOROLA Motorola ESG 207 route de Ferney P O Box 15 1218 Grand-Saconnex Geneva Switzerland
JP 2129209, JP 2561051, JP 2981517 Contactless Responding Unit	OMRON Intellectual Property Department Law & Intellectual Property H.Q. 20, Igadera Shimokaiinji Nagaokakyo City Kyoto 617-8510 Japan
Patent EP 0 492 569 B1 A system and method for the non-contact transmission of data.	ON-TRACK INNOVATIONS Z.H.R. Industrial Zone P O Box 32 Rosh-Pina 12000 Israel

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 164

The following companies may hold patents relating to this part of ISO/IEC 14443 but have not provided details of the patents or agreed to provide licences.

US 4 650 981	WAYNE S FOLETTA CA 95129, USA 4760 Castlewood Drive San Jose, California CA 9512 USA
US Patent No. 4, 661,691	JOHN W HALPERN C/O Vincent M DeLuca Rothwell, Figg, Ernst & Kurz, p.c. 555 Thirteenth Street, N.W. Suite 701 East Tower Washington, D.C. 20004
WO 89 05549 A	MAGELLAN CORPORATION 8717 Research Drive Irvine CA 92618 USA

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 14443 may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 165

Identification cards — Contactless integrated circuit(s) cards — Proximity cards — Part 4: Transmission protocol

1 Scope

This part of ISO/IEC 14443 specifies a half-duplex block transmission protocol featuring the special needs of a contactless environment and defines the activation and deactivation sequence of the protocol.

This part of ISO/IEC 14443 is intended to be used in conjunction with other parts of ISO/IEC 14443 and is applicable to proximity cards of Type A and Type B.

2 Normative references

The following normative documents contain provisions, which, through reference in this text, constitute provisions of this part of ISO/IEC 14443. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO/IEC 14443 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards

ISO/IEC 7816-3, *Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 3: Electronic signals and transmission protocols.*

ISO/IEC 7816-4, *Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 4: Interindustry commands for interchange.*

ISO/IEC 7816-5, *Identification cards – Integrated circuit(s) cards with contacts – Part 5: Numbering system and registration procedure for application identifiers.*

ISO/IEC 14443-2, *Identification cards – Contactless integrated circuit(s) cards – Proximity cards – Part 2: Radio frequency power and signal interface.*

ISO/IEC 14443-3, *Identification cards – Contactless integrated circuit(s) cards – Proximity cards – Part 3: Initialization and anticollision.*

3 Terms and definitions

For the purposes of this part of ISO/IEC 14443, the following terms and definitions apply.

3.1
bit duration
one elementary time unit (etu), calculated by the following formula:

$$1 \text{ etu} = 128 / (D \times fc)$$

The initial value of the divisor D is 1, giving the initial etu as follows:

$$1 \text{ etu} = 128 / fc$$

Where *fc* is the carrier frequency as defined in ISO/IEC 14443-2.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 166

3.2
block
special type of frame, which contains a valid protocol data format

NOTE A valid protocol data format includes I-blocks, R-blocks or S-blocks.

3.3
invalid block
type of frame, which contains an invalid protocol format

NOTE A time-out, when no frame has been received, is not interpreted as an invalid block.

3.4
frame
sequence of bits as defined in ISO/IEC 14443-3

NOTE The PICC Type A uses the standard frame defined for Type A and the PICC Type B uses the frame defined for Type B.

4 Symbols and abbreviated terms

ACK	positive ACKnowledgement
ATS	Answer To Select
ATQA	Answer To reQuest, Type A
ATQB	Answer To reQuest, Type B
CID	Card IDentifier
CRC	Cyclic Redundancy Check, as defined for each PICC Type in ISO/IEC 14443-3
D	Divisor
DR	Divisor Receive (PCD to PICC)
DRI	Divisor Receive Integer (PCD to PICC)
DS	Divisor Send (PICC to PCD)
DSI	Divisor Send Integer (PICC to PCD)
EDC	Error Detection Code
etu	elementary time unit
fc	carrier frequency
FSC	Frame Size for proximity Card
FSCI	Frame Size for proximity Card Integer
FSD	Frame Size for proximity coupling Device
FSDI	Frame Size for proximity coupling Device Integer
FWI	Frame Waiting time Integer

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 167

FWT	Frame Waiting Time
FWT_{TEMP}	temporary Frame Waiting Time
HLTA	HALT Command, Type A
I-block	Information block
INF	INformation Field
MAX	Index to define a maximum value
MIN	Index to define a minimum value
NAD	Node ADdress
NAK	Negative AcKnowledgement
OSI	Open Systems Interconnection
PCB	Protocol Control Byte
PCD	Proximity Coupling Device
PICC	Proximity Card
PPS	Protocol and Parameter Selection
PPSS	Protocol and Parameter Selection Start
PPS0	Protocol and Parameter Selection parameter 0
PPS1	Protocol and Parameter Selection parameter 1
R-block	Receive ready block
R(ACK)	R-block containing a positive acknowledge
R(NAK)	R-block containing a negative acknowledge
RATS	Request for Answer To Select
REQA	REQuest Command, Type A
RFU	Reserved for Future Use
S-block	Supervisory block
SAK	Select AcKnowledge
SFGI	Start-up Frame Guard time Integer
SFGT	Start-up Frame Guard Time
WUPA	Wake-Up Command, Type A
WTX	Waiting Time eXtension
WTXM	Waiting Time eXtension Multiplier

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 168

5 Protocol activation of PICC Type A

The following activation sequence shall be applied:

— PICC activation sequence as defined in ISO/IEC 14443-3 (request, anticollision loop and select).

— At the beginning the SAK byte shall be checked for availability of an ATS. The SAK is defined in ISO/IEC 14443-3.

— The PICC may be set to HALT state, using the HLTA Command as defined in ISO/IEC 14443-3, if no ATS is available.

— The RATS may be sent by the PCD as next command after receiving the SAK if an ATS is available.

— The PICC shall send its ATS as answer to the RATS. The PICC shall only answer to the RATS if the RATS is received directly after the selection.

— If the PICC supports any changeable parameters in the ATS, a PPS request may be used by the PCD as the next command after receiving the ATS to change parameters.

— The PICC shall send a PPS Response as answer to the PPS request.

A PICC does not need to implement the PPS, if it does not support any changeable parameters in the ATS.

The PCD activation sequence for a PICC Type A is shown in Figure 1.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 169

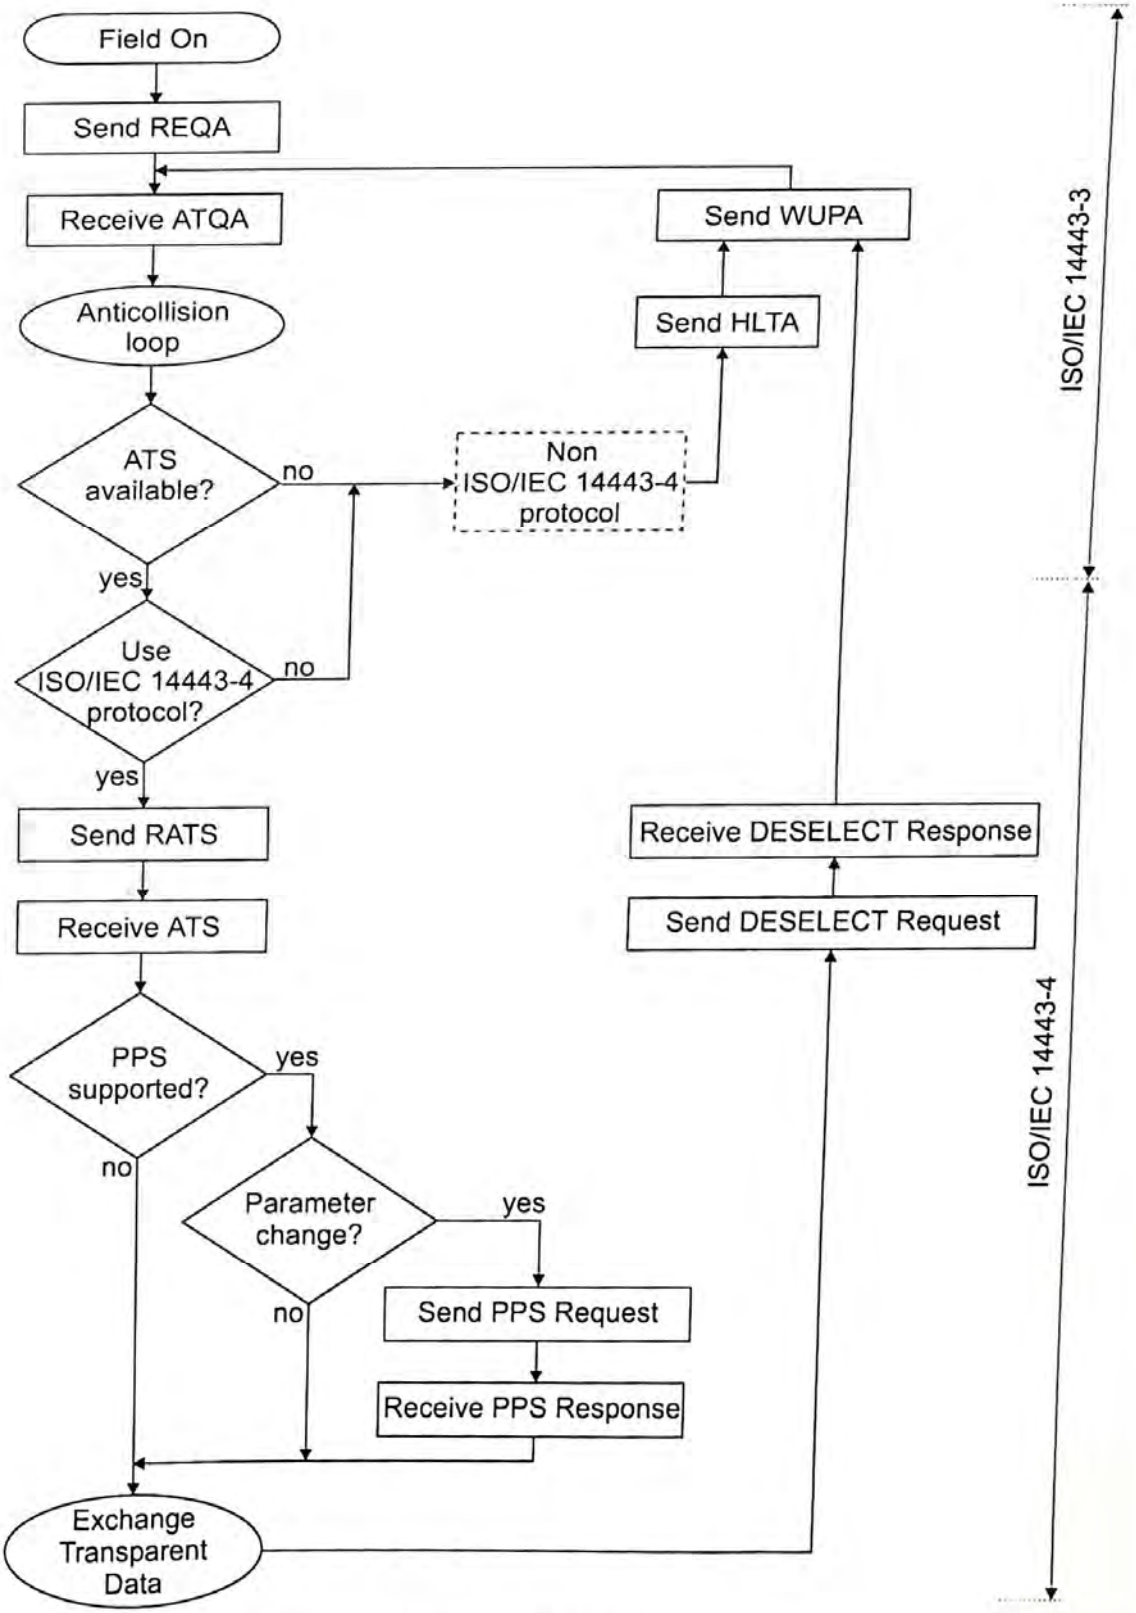


Figure 1 — Activation of a PICC Type A by a PCD

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 170

5.1 Request for answer to select

This clause defines the RATS with all its fields (see Figure 2).

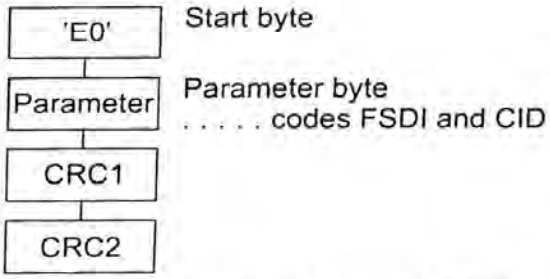


Figure 2 — Request for answer to select

The parameter byte consists of two parts (see Figure 3):

- The most significant half-byte b8 to b5 is called FSDI and codes FSD. The FSD defines the maximum size of a frame the PCD is able to receive. The coding of FSD is given in Table 1.
- The least significant half byte b4 to b1 is named CID and it defines the logical number of the addressed PICC in the range from 0 to 14. The value 15 is RFU. The CID is specified by the PCD and shall be unique for all PICCs, which are in the ACTIVE state at the same time. The CID is fixed for the time the PICC is active and the PICC shall use the CID as its logical identifier, which is contained in the first error-free RATS received.

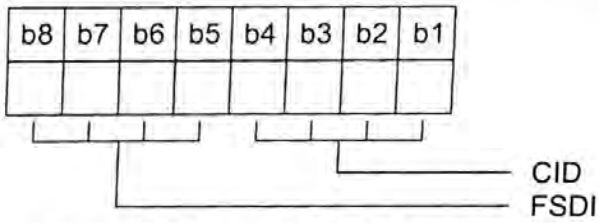


Figure 3 — Coding of RATS parameter byte

Table 1 — FSDI to FSD conversion

FSDI	'0'	'1'	'2'	'3'	'4'	'5'	'6'	'7'	'8'	'9'-'F'
FSD (bytes)	16	24	32	40	48	64	96	128	256	RFU >256

5.2 Answer to select

This clause defines the ATS with all its available fields (see Figure 4).

In the case that one of the defined fields is not present in an ATS sent by a PICC the default values for that field shall apply.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 171

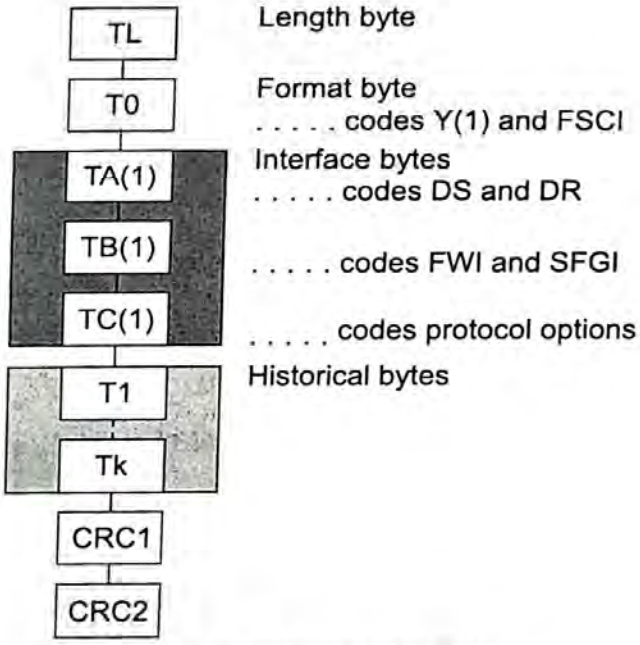


Figure 4 — Structure of the ATS

5.2.1 Structure of the bytes

The length byte TL is followed by a variable number of optional subsequent bytes in the following order:

— format byte T0,

— interface bytes TA(1), TB(1), TC(1) and

— historical bytes T1 to Tk.

5.2.2 Length byte

The length byte TL is mandatory and specifies the length of the transmitted ATS including itself. The two CRC bytes are not included in TL. The maximum size of the ATS shall not exceed the indicated FSD. Therefore the maximum value of TL shall not exceed FSD-2.

5.2.3 Format byte

The format byte T0 is optional and is present as soon as the length is greater than 1. The ATS can only contain the following optional bytes when this format byte is present.

T0 consists of three parts (see Figure 5):

— The most significant bit b8 shall be set to 0. The value 1 is RFU.

— The bits b7 to b5 contain Y(1) indicating the presence of subsequent interface bytes TC(1), TB(1) and TA(1).

— The least significant half byte b4 to b1 is called FSCI and codes FSC. The FSC defines the maximum size of a frame accepted by the PICC. The default value of FSCI is 2 and leads to a FSC of 32 bytes. The coding of FSC is equal to the coding of FSD (see Table 1).

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 172

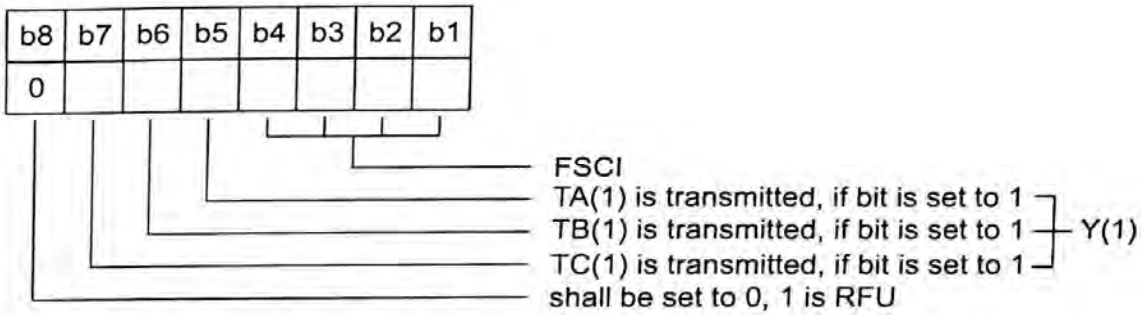


Figure 5 — Coding of format byte

5.2.4 Interface byte TA(1)

The interface byte TA(1) consists of four parts (see Figure 6):

— The most significant bit b8 codes the possibility to handle different divisors for each direction. When this bit is set to 1 the PICC is unable to handle different divisors for each direction.

— The bits b7 to b5 code the bit rate capability of the PICC for the direction from PICC to PCD, called DS. The default value shall be (000)b.

— The bit b4 shall be set to (0)b and the other value is RFU.

— The bits b3 to b1 code the bit rate capability of the PICC for the direction from PCD to PICC, called DR. The default value shall be (000)b.

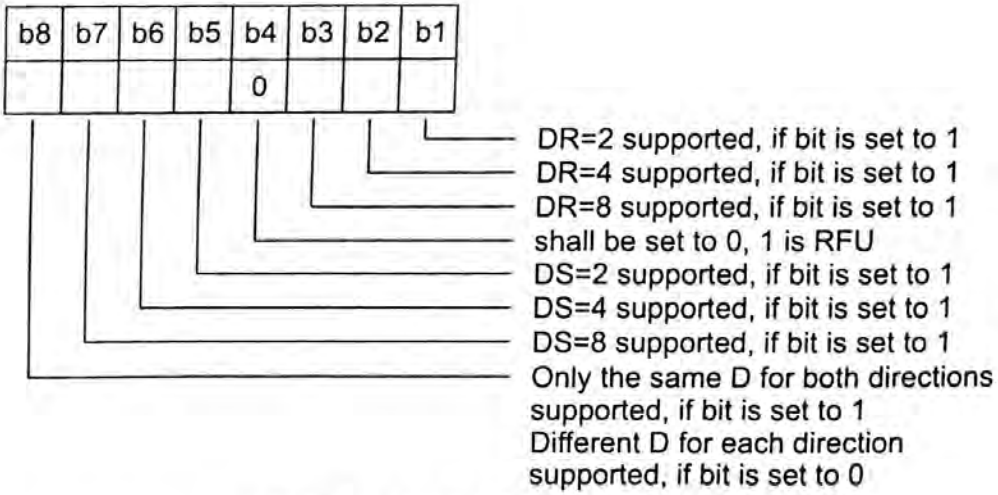


Figure 6 — Coding of interface byte TA(1)

The selection of a specific divisor D for each direction may be done by the PCD using a PPS.

5.2.5 Interface byte TB(1)

The interface byte TB(1) conveys information to define the frame waiting time and the start-up frame guard time.

The interface byte TB(1) consists of two parts (see Figure 7):

— The most significant half-byte b8 to b5 is called FWI and codes FWT (see 7.2).

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 173

— The least significant half byte b4 to b1 is called SFGI and codes a multiplier value used to define the SFGT. The SFGT defines a specific guard time needed by the PICC before it is ready to receive the next frame after it has sent the ATS. SFGI is coded in the range from 0 to 14. The value of 15 is RFU. The value of 0 indicates no SFGT needed and the values in the range from 1 to 14 are used to calculate the SFGT with the formula given below. The default value of SFGI is 0.

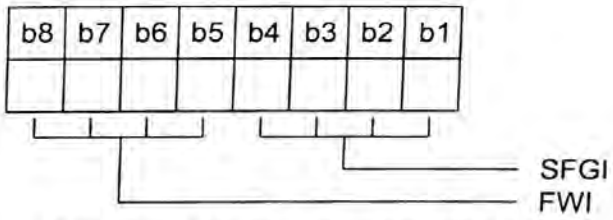


Figure 7 — Coding of interface byte TB(1)

SFGT is calculated by the following formula:

$SFGT = (256 \times 16 / fc) \times 2^{SFGI}$

$SFGT_{MIN}$ = minimum value of the frame delay time as defined in ISO/IEC 14443-3

$SFGT_{DEFAULT}$ = minimum value of the frame delay time as defined in ISO/IEC 14443-3

$SFGT_{MAX}$ = ~4949 ms

5.2.6 Interface byte TC(1)

The interface byte TC(1) specifies a parameter of the protocol.

The specific interface byte TC(1) consists of two parts (see Figure 8):

— The most significant bits b8 to b3 shall be (000000)b and all other values are RFU.

— The bits b2 and b1 define which optional fields in the prologue field a PICC does support. The PCD is allowed to skip fields, which are supported by the PICC, but a field not supported by the PICC shall never be transmitted by the PCD. The default value shall be (10)b indicating CID supported and NAD not supported.

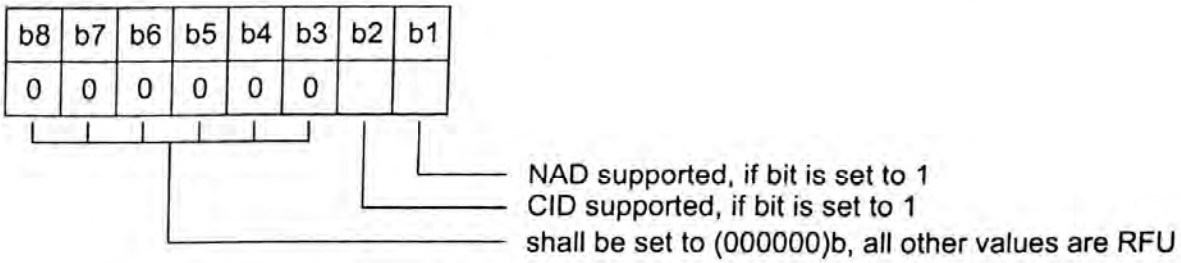


Figure 8 — Coding of interface byte TC(1)

5.2.7 Historical bytes

The historical bytes T1 to Tk are optional and designate general information. The maximum length of the ATS gives the maximum possible number of historical bytes. ISO/IEC 7816-4 specifies the content of the historical bytes.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 174

5.3 Protocol and parameter selection request

PPS request contains the start byte that is followed by two parameter bytes (see Figure 9).

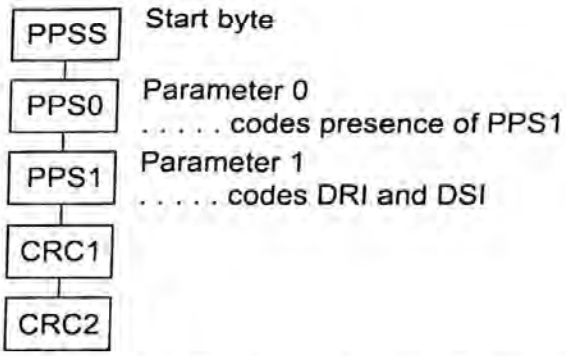


Figure 9 — Protocol and parameter selection request

5.3.1 Start byte

PPSS consists of two parts (see Figure 10):

— The most significant half byte b8 to b5 shall be set to 'D' and identifies the PPS.

— The least significant half byte b4 to b1 is named CID and it defines the logical number of the addressed PICC.

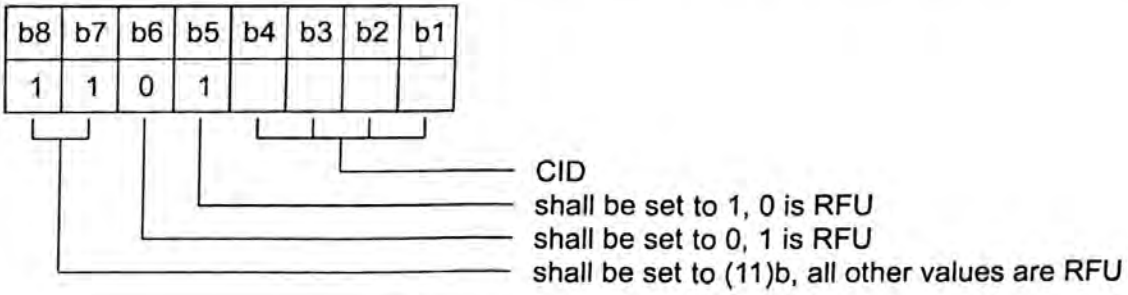


Figure 10 — Coding of PPSS

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 175

5.3.2 Parameter 0

PPS0 indicates the presence of the optional byte PPS1 (see Figure 11).

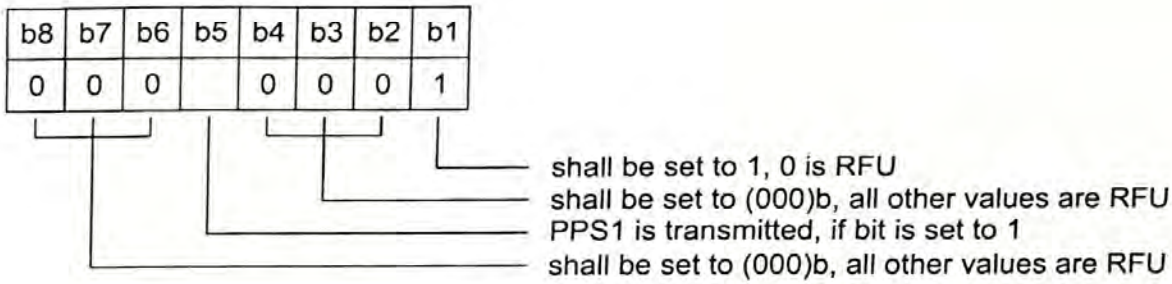


Figure 11 — Coding of PPS0

5.3.3 Parameter 1

PPS1 consists of three parts (see Figure 12):

— The most significant half byte b8 to b5 shall be (0000)b and all other values are RFU.

— The bits b4 and b3 are called DSI and code the selected divisor integer from PICC to PCD.

— The bits b2 and b1 are called DRI and code the selected divisor integer from PCD to PICC.

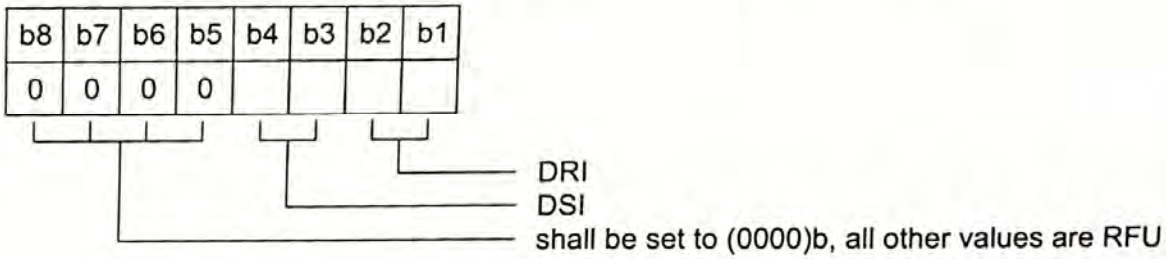


Figure 12 — Coding of PPS1

For the definition of DS and DR, see 5.2.4.

The coding of D is given in Table 2.

Table 2 — DRI, DSI to D conversion

DRI, DSI	(00)b	(01)b	(10)b	(11)b
D	1	2	4	8

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 176

5.4 Protocol and parameter selection response

The PPS response acknowledges the received PPS request (see Figure 13) and it contains only the start byte (see 5.3.1).




Figure 13 — Protocol and parameter selection response

5.5 Activation frame waiting time

The activation frame waiting time defines the maximum time for a PICC to start sending its response frame after the end of a frame received from the PCD and has a value of 65536/*fc* (~4833 µs).

NOTE The minimum time between frames in any direction is defined in ISO/IEC 14443-3.

5.6 Error detection and recovery

5.6.1 Handling of RATS and ATS

5.6.1.1 PCD rules

When the PCD has sent the RATS and receives a valid ATS the PCD shall continue operation.

In any other case the PCD may retransmit the RATS before it shall use the deactivation sequence as defined in clause 8. In case of failure of this deactivation sequence it may use the HLTA Command as defined in ISO/IEC 14443-3.

5.6.1.2 PICC rules

When the PICC has been selected with the last command and

a) receives a valid RATS, the PICC

   — shall send back its ATS and

   — shall disable the RATS (stop responding to received RATS).

b) receives any other block valid or invalid, except a HLTA Command, the PICC

   — shall ignore the block and

   — shall remain in receive mode.

© ISO/IEC 2001 – All rights reserved
IPR2025-01234
Apple EX1033 Page 177

5.6.2 Handling of PPS request and PPS response

5.6.2.1 PCD rules

When the PCD has sent a PPS request and received a valid PPS response the PCD shall activate the selected parameters and continue operation.

In any other case the PCD may retransmit a PPS request and continue operation.

5.6.2.2 PICC rules

When the PICC has received a RATS, sent its ATS and

a) received a valid PPS request, the PICC

- shall send the PPS response,
- shall disable the PPS request (stop responding to received PPS requests) and
- shall activate the received parameter.

b) received an invalid block, the PICC

- shall disable the PPS request (stop responding to received PPS requests) and
- shall remain in receive mode.

c) received a valid block, except a PPS request, the PICC

- shall disable the PPS request (stop responding to received PPS requests) and
- shall continue operation.

5.6.3 Handling of the CID during activation

When the PCD has sent a RATS containing a CID=*n* not equal to 0 and

a) received an ATS indicating CID is supported, the PCD

- shall send blocks containing CID=*n* to this PICC and
- shall not use the CID=*n* for further RATS while this PICC is in ACTIVE state.

b) received an ATS indicating CID is not supported, the PCD

- shall send blocks containing no CID to this PICC and
- shall not activate any other PICC while this PICC is in ACTIVE state.

When the PCD has sent a RATS containing a CID equal to 0 and

a) received an ATS indicating CID is supported, the PCD

- may send blocks containing CID equal to 0 to this PICC and
- shall not activate any other PICC while this PICC is in ACTIVE state.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 178

b) received an ATS indicating CID is not supported, the PCD shall

— send blocks containing no CID to this PICC and

— not activate any other PICC while this PICC is in ACTIVE state.

6 Protocol activation of PICC Type B

The activation sequence for a PICC Type B is described in ISO/IEC 14443-3.

7 Half-duplex block transmission protocol

The half-duplex block transmission protocol addresses the special needs of contactless card environments and uses the frame format as defined in ISO/IEC 14443-3.

Other relevant elements of the frame format are:

— block format,

— maximum frame waiting time,

— power indication and

— protocol operation.

This protocol is designed according to the principle layering of the OSI reference model, with particular attention to the minimization of interactions across boundaries. Four layers are defined:

— Physical layer exchanges bytes according to ISO/IEC 14443-3.

— Data link layer exchanges blocks as defined in this clause.

— Session layer combined with the data link layer for a minimum overhead.

— Application layer processing commands, which involve the exchange of at least one block or chain of blocks in either direction.


NOTE Application selection may be used as defined in ISO/IEC 7816-5. Implicit application selection is not recommended to be used with multi-application PICCs.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 179

7.1 Block format

The block format (see Figure 14) consists of a prologue field (mandatory), an information field (optional) and an epilogue field (mandatory).

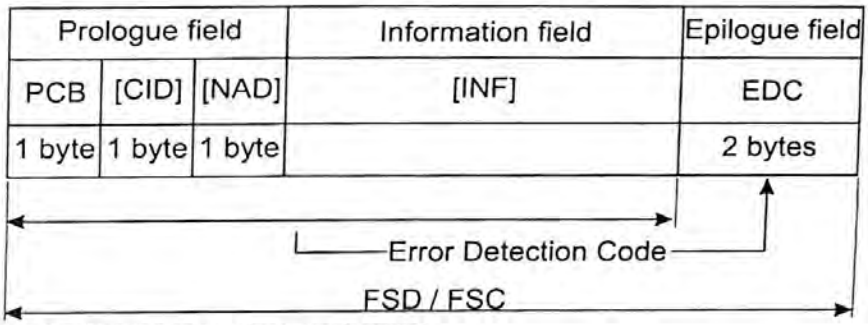

NOTE The items in brackets indicate optional requirements.

Figure 14 — Block format

7.1.1 Prologue field

The prologue field is mandatory and consists of up to three bytes:

— Protocol Control Byte (mandatory),

— Card IDentifier (optional),

— Node ADdress (optional).

7.1.1.1 Protocol control byte field

The PCB is used to convey the information required to control the data transmission.

The protocol defines three fundamental types of blocks:

— I-block used to convey information for use by the application layer.

— R-block used to convey positive or negative acknowledgements. An R-block never contains an INF field. The acknowledgement relates to the last received block.

— S-block used to exchange control information between the PCD and the PICC. Two different types of S-blocks are defined:

1) Waiting time extension containing a 1 byte long INF field and

2) DESELECT containing no INF field.

The coding of the PCB depends on its type and is defined by the following figures. PCB coding not defined here are either used in other clauses of ISO/IEC 14443 or are RFU. The coding of I-blocks, R-blocks and S-blocks are shown in Figure 15, Figure 16 and Figure 17.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 180

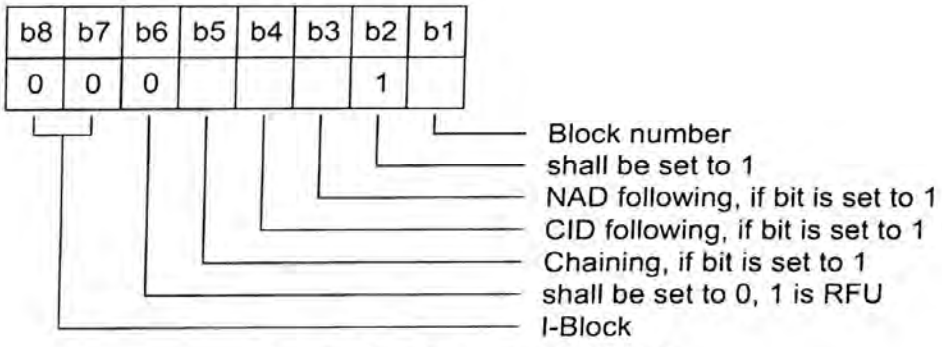


Figure 15 — Coding of I-block PCB

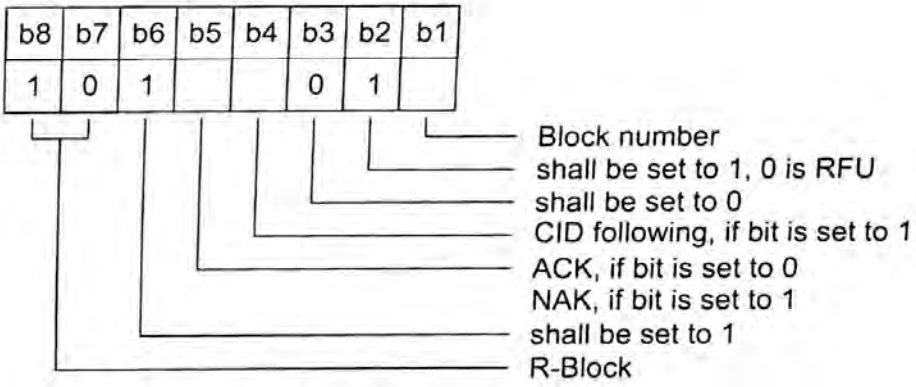


Figure 16 — Coding of R-block PCB

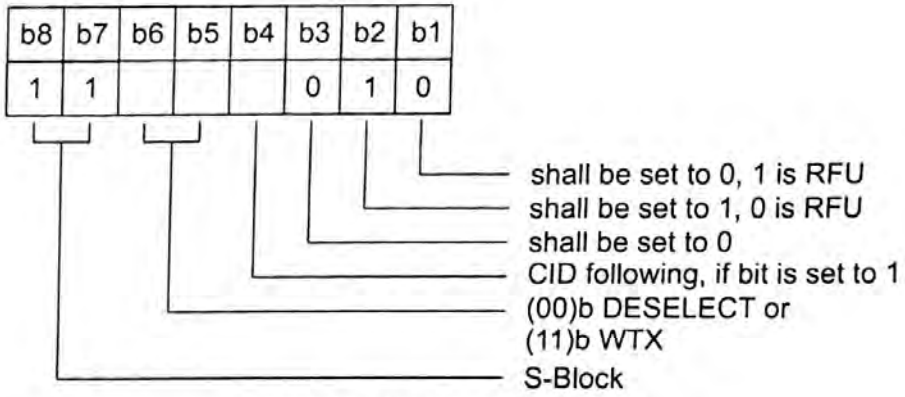


Figure 17 — Coding of S-block PCB

7.1.1.2 Card identifier field

The CID field is used to identify a specific PICC and consists of three parts (see Figure 18):

— The two most significant bits b8 and b7 are used to indicate the power level indication received by a PICC from a PCD. These two bits shall be set to (00)b for PCD to PICC communication. For a definition of power level indication, see 7.4.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 181

— The bits b6 and b5 are used to convey additional information, which are not defined and shall be set to (00)b and all other values are RFU.

— The bits b4 to b1 code the CID.

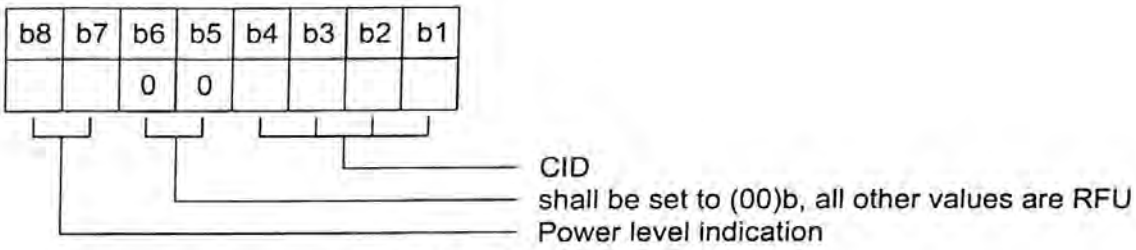


Figure 18 — Coding of card identifier

The coding of CID is given in 5.1 for Type A and ISO/IEC 14443-3 for Type B.

The handling of the CID by a PICC is described below:

A PICC, which does not support a CID

— shall ignore any block containing a CID.

A PICC, which does support a CID

— shall respond to blocks containing its CID by using its CID,

— shall ignore blocks containing other CIDs and

— shall, in case its CID is 0, respond also to blocks containing no CID by using no CID.

7.1.1.3 Node address field

The NAD in the prologue field is reserved to build up and address different logical connections. The usage of the NAD shall be compliant with the definition from ISO/IEC 7816-3, when the bits b8 and b4 are both set to 0. All other values are RFU.

The following definitions shall apply for the usage of the NAD:

a) The NAD field shall only be used for I-blocks.

b) When the PCD uses the NAD, the PICC shall also use the NAD.

c) During chaining the NAD shall only be transmitted in the first block of chain.

d) The PCD shall never use the NAD to address different PICCs (The CID shall be used to address different PICCs).

e) When the PICC does not support the NAD, it shall ignore any block containing the NAD.

7.1.2 Information field

The INF field is optional. When present, the INF field conveys either application data in I-blocks or non-application data and status information in S-blocks. The length of the information field is calculated by counting the number of bytes of the whole block minus length of prologue and epilogue field.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 182

7.1.3 Epilogue field

The epilogue field contains the EDC of the transmitted block, which is the CRC defined in ISO/IEC 14443-3.

7.2 Frame waiting time

The FWT defines the time within which a PICC shall start its response frame after the end of a PCD frame (see Figure 19).

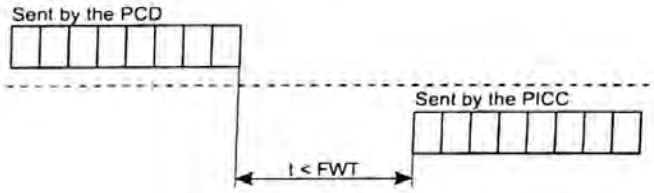


Figure 19 — Frame waiting time

NOTE The minimum time between frames in any direction is defined in ISO/IEC 14443-3.

FWT is calculated by the following formula:

$$FWT = (256 \times 16 / fc) \times 2^{FWI}$$

where the value of FWI has the range from 0 to 14 and the value of 15 is RFU. For Type A, if TB(1) is omitted, the default value of FWI is 4, which gives a FWT value of ~ 4,8 ms.

For FWI = 0, FWT = FWT_{MIN} (~302 µs)

For FWI = 14, FWT = FWT_{MAX} (~4949 ms)

The FWT value shall be used by the PCD to detect a protocol error or an unresponsive PICC. The PCD obtains the right to re-transmit if the start of a response from the PICC is not received within FWT.

The FWI field for Type B is located in ATQB as defined in ISO/IEC 14443-3. The FWI field for Type A is located in the ATS (see 5.2.5).

7.3 Frame waiting time extension

When the PICC needs more time than the defined FWT to process the received block it shall use an S(WTX) request for a waiting time extension. An S(WTX) request contains a 1 byte long INF field that consists of two parts (see Figure 20):

— The two most significant bits b8 and b7 code the power level indication (see 7.4).

— The least significant bits b6 to b1 code the WTXM. The WTXM is coded in the range from 1 to 59. The values 0 and 60 to 63 are RFU.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 183

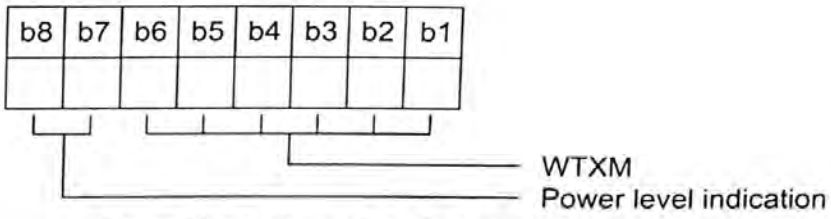


Figure 20 — Coding of INF field of an S(WTX) request

The PCD shall acknowledge by sending an S(WTX) response containing also a 1 byte long INF field that consists of two parts (see Figure 21) and contains the same WTXM as received in the request:

— The most significant bits b8 and b7 shall be (00)b and all other values are RFU.

— The least significant bits b6 to b1 codes the acknowledged WTXM value used to define a temporary FWT.

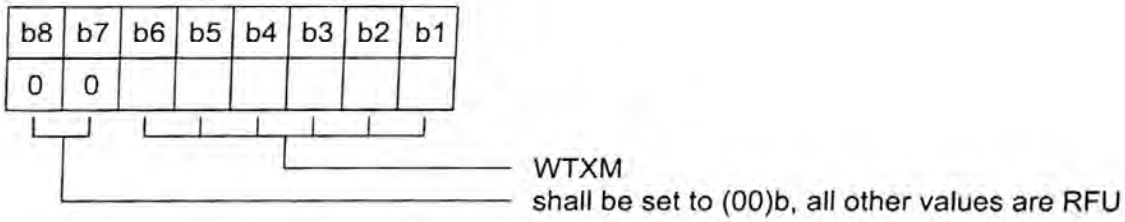


Figure 21 — Coding of INF field of an S(WTX) response

The corresponding temporary value of FWT is calculated by the following formula:

$FWT_{TEMP} = FWT \times WTXM$.

The time FWT_{TEMP} requested by the PICC, starts after the PCD has sent the S(WTX) response.

FWT_{MAX} shall be used, when the formula results in a value higher than FWT_{MAX}.

The temporary FWT applies only until the next block has been received by the PCD.

7.4 Power level indication

The power level indication is coded as shown in Table 3 using two bits embedded in the CID field (when present) and in the S-block sent by the PICC (see 7.1.1.2 and 7.3).

Table 3 — Coding of power level indication

(00)b	PICC does not support the power level indication
(01)b	Insufficient power for full functionality
(10)b	Sufficient power for full functionality
(11)b	More than sufficient power for full functionality

NOTE Interpretation of the power level indication by the PCD is optional.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 184

7.5 Protocol operation

After the activation sequence the PICC shall wait for a block as only the PCD has the right to send. After sending a block, the PCD shall switch to receive mode and wait for a block before switching back to transmit mode. The PICC may transmit blocks only in response to received blocks (it is insensitive to time delays). After responding, the PICC shall return to the receive mode.

The PCD shall not initiate a new pair of command / response until the current pair of command / response has been completed or if the frame waiting time is exceeded with no response.

7.5.1 Multi-Activation

The Multi-Activation feature allows the PCD to hold several PICCs in the ACTIVE state simultaneously. It allows switching directly between several PICCs without needing additional time for deactivation of a PICC and activation of another PICC.

For an example of Multi-Activation, see Annex A.

NOTE The PCD needs to handle a separate block number for each activated PICC.

7.5.2 Chaining

The chaining feature allows the PCD or PICC to transmit information that does not fit in a single block as defined by FSC or FSD respectively, by dividing the information into several blocks. Each of those blocks shall have a length less than or equal to FSC or FSD respectively.

The chaining bit in the PCB of an I-block controls the chaining of blocks. Each I-block with the chaining bit set shall be acknowledged by an R-block.

The chaining feature is shown in Figure 22 using a 16 bytes long string transmitted in three blocks.

Notation:


$I(1)_x$ I-block with chaining bit set and block number x

$I(0)_x$ I-block with chaining bit not set (last block of chain) and block number x

$R(ACK)_x$ R-block that indicates a positive acknowledge.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 185

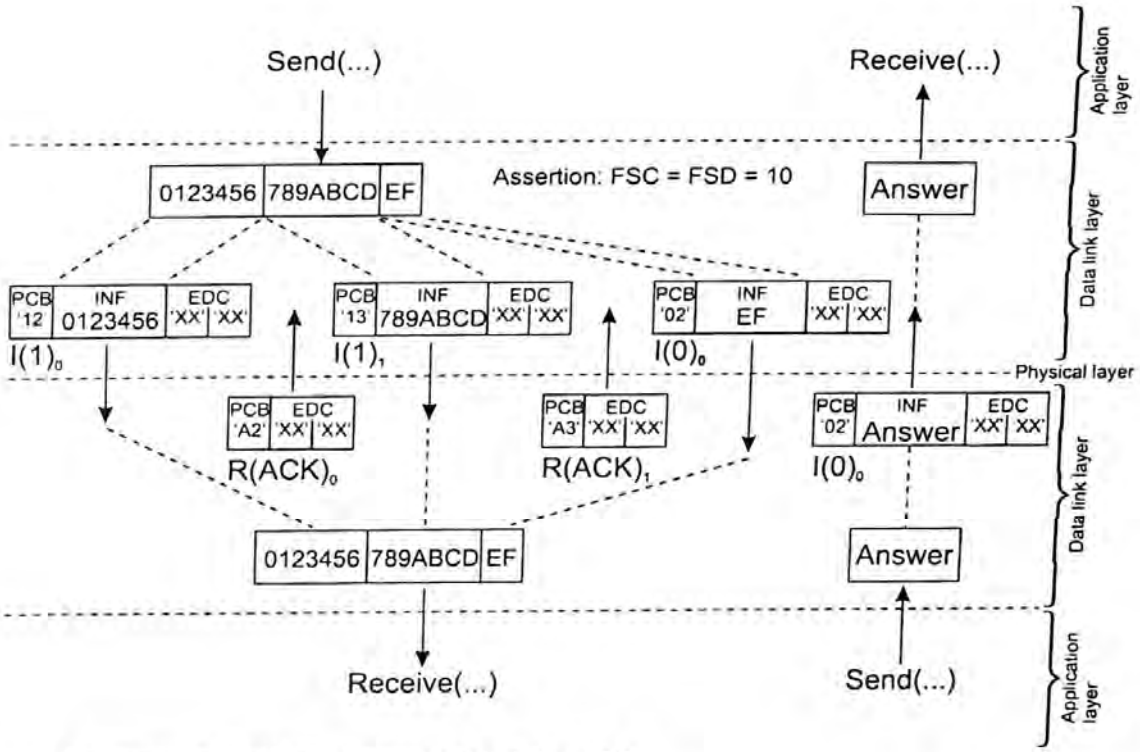

NOTE This example does not use the optional fields NAD and CID.

Figure 22 — Chaining

7.5.3 Block numbering rules

7.5.3.1 PCD rules

Rule A. The PCD block number shall be initialized to 0 for each activated PICC.

Rule B. When an I-block or an R(ACK) block with a block number equal to the current block number is received, the PCD shall toggle the current block number for that PICC before optionally sending a block.

7.5.3.2 PICC rules

Rule C. The PICC block number shall be initialized to 1 at activation.

Rule D. When an I-block is received (independent of its block number), the PICC shall toggle its block number before sending a block.

Rule E. When an R(ACK) block with a block number not equal to the current PICC's block number is received, the PICC shall toggle its block number before sending a block.

7.5.4 Block handling rules

7.5.4.1 General rules

Rule 1. The first block shall be sent by the PCD.

Rule 2. When an I-block indicating chaining is received, the block shall be acknowledged by an R(ACK) block.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 186

Rule 3. S-blocks are only used in pairs. An S(...) request block shall always be followed by an S(...) response block (see 7.3 and 8).

7.5.4.2 PCD rules

Rule 4. When an invalid block is received or a FWT time-out occurs, an R(NAK) block shall be sent (except in the case of PICC chaining or S(DESELECT)).

Rule 5. In the case of PICC chaining, when an invalid block is received or a FWT time-out occurs, an R(ACK) block shall be sent.

Rule 6. When an R(ACK) block is received, if its block number is not equal to the PCD's current block number, the last I-block shall be re-transmitted.

Rule 7. When an R(ACK) block is received, if its block number is equal to the PCD's current block number, chaining shall be continued.

Rule 8. If the S(DESELECT) request is not answered by an error-free S(DESELECT) response the S(DESELECT) request may be re-transmitted or the PICC may be ignored.

7.5.4.3 PICC rules

Rule 9. The PICC is allowed to send an S(WTX) block instead of an I-block or an R(ACK) block.

Rule 10. When an I-block not indicating chaining is received, the block shall be acknowledged by an I-block.

Rule 11. When an R(ACK) or an R(NAK) block is received, if its block number is equal to the PICC's current block number, the last block shall be re-transmitted.

Rule 12. When an R(NAK) block is received, if its block number is not equal to the PICC's current block number, an R(ACK) block shall be sent.

Rule 13. When an R(ACK) block is received, if its block number is not equal to the PICC's current block number, and the PICC is in chaining, chaining shall be continued.

7.5.5 Error detection and recovery

When errors are detected the following recovery rules shall be attempted. The definitions made in this clause overrule the block handling rules (see 7.5.3).

The following errors shall be detected by the PCD:

a) Transmission error (Frame error or EDC error) or FWT time-out

The PCD shall attempt error recovery by the following techniques in the order shown:

— Application of PCD rules (see 7.5.4.2),

— Use of S(DESELECT) request,

— Ignore the PICC.

b) Protocol error (infringement of PCB coding or infringement of protocol rules)

The PCD shall attempt error recovery by the following techniques in the order shown:

— Use of S(DESELECT) request,

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 187

— Ignore the PICC.

The following errors shall be detected by the PICC:

a) Transmission error (Frame error or EDC error),

b) Protocol error (infringement of the protocol rules).

The PICC shall attempt no error recovery. The PICC shall always return to receive mode, when a transmission error or a protocol error occurs and it shall accept an S(DESELECT) request at any time.

NOTE An R(NAK) block is never sent by the PICC.

8 Protocol deactivation of PICC Type A and Type B

The PICC shall be set to the HALT state, after the transactions between PCD and PICC have been completed.

The deactivation of a PICC is done by using a DESELECT Command.

The DESELECT Command is coded as an S-block of the protocol and consists of an S(DESELECT) request block sent by the PCD and an S(DESELECT) response sent as acknowledge by the PICC.

8.1 Deactivation frame waiting time

The deactivation frame waiting time defines the maximum time for a PICC to start sending its S(DESELECT) response frame after the end of the S(DESELECT) request frame received from the PCD and has a value of 65536/*fc* (~4,8 ms).

NOTE The minimum time between frames in any direction is defined in ISO/IEC 14443-3.

8.2 Error detection and recovery

When the PCD has sent an S(DESELECT) request and has received an S(DESELECT) response, the PICC has been set successfully to the HALT state and the CID assigned to it is released.

When the PCD fails to receive an S(DESELECT) response the PCD may retry the deactivation sequence.

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 188

Annex A
(informative)

Multi-Activation example

The following table describes an example of the usage of Multi-Activation for three PICCs.

Table A.1 — Multi-Activation

PCD Action	Status PICC 1	Status PICC 2	Status PICC 3
Power On field			
Three PICC enter the field.	IDLE	IDLE	IDLE
Activate PICC with CID=1	ACTIVE(1)	IDLE	IDLE
Any data transmission with CID=1	ACTIVE(1)	IDLE	IDLE
...			
Activate PICC with CID=2	ACTIVE(1)	ACTIVE(2)	IDLE
Any data transmission with CID=1,2	ACTIVE(1)	ACTIVE(2)	IDLE
...			
Activate PICC with CID=3	ACTIVE(1)	ACTIVE(2)	ACTIVE(3)
Any data transmission with CID=1,2,3	ACTIVE(1)	ACTIVE(2)	ACTIVE(3)
...			
S(DESELECT) Command with CID=3	ACTIVE(1)	ACTIVE(2)	HALT
S(DESELECT) Command with CID=2	ACTIVE(1)	HALT	HALT
S(DESELECT) Command with CID=1	HALT	HALT	HALT
...			

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 189

Annex B
(informative)

Protocol scenarios

This annex gives some scenarios for an error-free operation as well as for error handling. These scenarios may be used to build test cases for compliance tests.

B.1 Notation

Any block	===>	correctly received
Any block	=/=>	erroneously received
Any block	= =>	nothing received (FWT time-out)
Separator line	____	end of the smallest protocol operation

$I(1)_x$	I-block with chaining bit set and block number x
$I(0)_x$	I-block with chaining bit not set (last block of chain) and block number x
$R(ACK)_x$	R-block indicating a positive acknowledge
$R(NAK)_x$	R-block indicating a negative acknowledge
S(...)	S-block

The block numbering in a scenario always starts with the PCD's current block number for the destination PICC. For ease of presentation, scenarios start after the PICC activation sequence and hence the current block numbers start with 0 for the PCD and with 1 for the PICC.

B.2 Error-free operation

B.2.1 Exchange of I-blocks

Scenario 1 Exchange of I-blocks

Comment		Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	===>		0	rule D
2.	rule B	1		<===	$I(0)_0$		rule 10
3.			$I(0)_1$	===>		1	rule D
4.	rule B	0		<===	$I(0)_1$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 190

B.2.2 Request for waiting time extension

Scenario 2 Waiting time extension

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	⟹		0	rule D
2.				⟸	S(WTX) request		rule 9
3.	rule 3		S(WTX) response	⟹			
4.	rule B	1		⟸	$I(0)_0$		rule 10
5.			$I(0)_1$	⟹		1	rule D
6.	rule B	0		⟸	$I(0)_1$		rule 10

B.2.3 DESELECT

Scenario 3 DESELECT

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	⟹		0	rule D
2.	rule B	1		⟸	$I(0)_0$		rule 10
3.			S(DESELECT) request	⟹			
4.				⟸	S(DESELECT) response		rule 3

B.2.4 Chaining

Scenario 4 PCD uses chaining

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(1)_0$	⟹		0	rule D
2.	rule B	1		⟸	$R(ACK)_0$		rule 2
3.	rule 7		$I(0)_1$	⟹		1	rule D
4.	rule B	0		⟸	$I(0)_1$		rule 10
5.			$I(0)_0$	⟹		0	rule D
6.	rule B	1		⟸	$I(0)_0$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 191

Scenario 5 PICC uses chaining

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.	rule B	1		<==	$I(1)_0$		rule 10
3.	rule 2		$R(ACK)_1$	==>		1	rule E
4.	rule B	0		<==	$I(0)_1$		rule 13
5.			$I(0)_0$	==>		0	rule D
6.	rule B	1		<==	$I(0)_0$		rule 10

B.3 Error handling

B.3.1 Exchange of I-blocks

Scenario 6 Start of protocol

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	=/=>			
2.	time-out			<= =	-		
3.	rule 4		$R(NAK)_0$	==>			
4.		no change		<==	$R(ACK)_1$		rule 12
5.	rule 6		$I(0)_0$	==>		0	rule D
6.	rule B	1		<==	$I(0)_0$		rule 10
7.			$I(0)_1$	==>		1	rule D
8.	rule B	0		<==	$I(0)_1$		rule 10

Scenario 7 Exchange of I-blocks

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.	rule B	1		<==	$I(0)_0$		rule 10
3.			$I(0)_1$	=/=>			
4.	time-out			<= =	-		
5.	rule 4		$R(NAK)_1$	==>			
6.		no change		<==	$R(ACK)_0$		rule 12
7.	rule 6		$I(0)_1$	==>		1	rule D
8.	rule B	0		<==	$I(0)_1$		rule 10
9.			$I(0)_0$	==>		0	rule D
10.	rule B	1		<==	$I(0)_0$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 192

Scenario 8 Exchange of I-blocks

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.				<=≠=	$I(0)_0$		rule 10
3	rule 4		$R(NAK)_0$	==>			
4.	rule B	1		<==	$I(0)_0$		rule 11
5.			$I(0)_1$	==>		1	rule D
6.	rule B	0		<==	$I(0)_1$		rule 10

Scenario 9 Exchange of I-blocks

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.				<=≠=	$I(0)_0$		rule 10
3.	rule 4		$R(NAK)_0$	=≠=>			
4.	time-out			<= =	-		
5.	rule 4		$R(NAK)_0$	==>			
6.	rule B	1		<==	$I(0)_0$		rule 11
7.			$I(0)_1$	==>		1	rule D
8.	rule B	0		<==	$I(0)_1$		rule 10

B.3.2 Request for waiting time extension

Scenario 10 Request for waiting time extension

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.				<=≠=	S(WTX) request		rule 9
3.	rule 4		$R(NAK)_0$	==>			
4.				<==	S(WTX) request		rule 11
5.	rule 3		S(WTX) response	==>			
6.	rule B	1		<==	$I(0)_0$		rule 10
7.			$I(0)_1$	==>		1	rule D
8.	rule B	0		<==	$I(0)_1$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 193

Scenario 11 Request for waiting time extension

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.				<=/=	S(WTX) request		rule 9
3.	rule 4		$R(NAK)_0$	=/=>			
4.	time-out			<= =	-		
5.	rule 4		$R(NAK)_0$	==>			
6.				<==	S(WTX) request		rule 11
7.	rule 3		S(WTX) response	==>			
8.	rule B	1		<==	$I(0)_0$		rule 10
9.			$I(0)_1$	==>		1	rule D
10.	rule B	0		<==	$I(0)_1$		rule 10

Scenario 12 Request for waiting time extension

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.				<==	S(WTX) request		rule 9
3.	rule 3		S(WTX) response	=/=>			
4.	time-out			<= =	-		
5.	rule 4		$R(NAK)_0$	==>			
6.				<==	S(WTX) request		rule 11
7.	rule 3		S(WTX) response	==>			
8.	rule B	1		<==	$I(0)_0$		rule 10
9.			$I(0)_1$	==>		1	rule D
10.	rule B	0		<==	$I(0)_1$		rule 10

Scenario 13 Request for waiting time extension

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.				<==	S(WTX) request		rule 9
3.	rule 3		S(WTX) response	==>			
4.				<=/=	$I(0)_0$		rule 10
5.	rule 4		$R(NAK)_0$	==>			
6.	rule B	1		<==	$I(0)_0$		rule 11
7.			$I(0)_1$	==>		1	rule D
8.	rule B	0		<==	$I(0)_1$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 194

Scenario 14 Request for waiting time extension

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.				<==	S(WTX) request		rule 9
3.	rule 3		S(WTX) response	==>			
4.				<=/=	$I(0)_0$		rule 10
5.	rule 4		$R(NAK)_0$	=/=>			
6.	time-out			<= =	-		
7.	rule 4		$R(NAK)_0$	==>			
8.	rule B	1		<==	$I(0)_0$		rule 11
9.			$I(0)_1$	==>		1	rule D
10.	rule B	0		<==	$I(0)_1$		rule 10

B.3.3 DESELECT

Scenario 15 DESELECT

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.	rule B			<==	$I(0)_0$		rule 10
3.			S(DESELECT) request	=/=>			
4.	time-out			<= =	-		
5.	rule 8		S(DESELECT) request	==>			
6.				<==	S(DESELECT) response		rule 3

B.3.4 Chaining

Scenario 16 PCD uses chaining

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(1)_0$	==>		0	rule D
2.				<=/=	$R(ACK)_0$		rule 2
3.	rule 4		$R(NAK)_0$	==>			
4.	rule B	1		<==	$R(ACK)_0$		rule 11
5.	rule 7		$I(1)_1$	==>		1	rule D
6.	rule B	0		<==	$R(ACK)_1$		rule 2
7.	rule 7		$I(0)_0$	==>		0	rule D
8.	rule B	1		<==	$I(0)_0$		rule 10
9.			$I(0)_1$	==>		1	rule D
10.	rule B	0		<==	$I(0)_1$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 195

Scenario 17 PCD uses chaining

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(1)_0$	==>		0	rule D
2.	rule B	1		<==	$R(ACK)_0$		rule 2
3.	rule 7		$I(1)_1$	=/=>			
4.	time-out			<= =	-		
5.	rule 4		$R(NAK)_1$	==>			
6.		no change		<==	$R(ACK)_0$		rule 12
7.	rule 6		$I(1)_1$	==>		1	rule D
8.	rule B	0		<==	$R(ACK)_1$		rule 2
9.	rule 7		$I(0)_0$	==>		0	rule D
10.	rule B	1		<==	$I(0)_0$		rule 10
11.			$I(0)_1$	==>		1	rule D
12.	rule B	0		<==	$I(0)_1$		rule 10

Scenario 18 PCD uses chaining

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(1)_0$	==>		0	rule D
2.				<=/=	$R(ACK)_0$		rule 2
3.	rule 4		$R(NAK)_0$	=/=>			
4.	time-out			<= =	-		
5.	rule 4		$R(NAK)_0$	==>			
6.	rule B	1		<==	$R(ACK)_0$		rule 11
7.	rule 7		$I(1)_1$	==>		1	rule D
8.	rule B	0		<==	$R(ACK)_1$		rule 2
9.	rule 7		$I(0)_0$	==>		0	rule D
10.	rule B	1		<==	$I(0)_0$		rule 10
11.			$I(0)_1$	==>		1	rule D
12.	rule B	0		<==	$I(0)_1$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 196

Scenario 19 PICC uses chaining

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.	rule B	1		<==	$I(1)_0$		rule 10
3.	rule 2		$R(ACK)_1$	=/=>			
4.	time-out			<= =	-		
5.	rule 5		$R(ACK)_1$	==>		1	rule E
6.	rule B	0		<==	$I(1)_1$		rule 13
7.	rule 2		$R(ACK)_0$	==>		0	rule E
8.	rule B	1		<==	$I(0)_0$		rule 13
9.			$I(0)_1$	==>		1	rule D
10.	rule B	0		<==	$I(0)_1$		rule 10

Scenario 20 PICC uses chaining

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	==>		0	rule D
2.	rule B	1		<==	$I(1)_0$		rule 10
3.	rule 2		$R(ACK)_1$	==>		1	rule E
4.				<=/=	$I(1)_1$		rule 13
5.	rule 5		$R(ACK)_1$	==>		no change	
6.	rule B	0		<==	$I(1)_1$		rule 11
7.	rule 2		$R(ACK)_0$	==>		0	rule E
8.	rule B	1		<==	$I(0)_0$		rule 13
9.			$I(0)_1$	==>		1	rule D
10.	rule B	0		<==	$I(0)_1$		rule 10

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 197

Annex C
(informative)

Block and frame coding overview

This clause gives an overview of the different block and frame coding sent by the PCD. The type of a block respectively frame is indicated by the first byte.

Definitions made in ISO/IEC 14443-3:

REQA	(0100110)b (7 bit)
WUPA	(1010010)b (7 bit)
REQB / WUPB	(00000101)b
Slot-MARKER (Type B only)	(xxxx0101)b
SELECT (Type A only)	(1001xxxx)b
ATTRIB (Type B only)	(00011101)b
HLTA	(01010000)b
HLTB	(01010000)b

Definitions made in this part of ISO/IEC 14443:

RATS	(11100000)b
PPS	(1101xxxx)b
I-block	(00xxxxxx)b (not (00xxx101)b)
R-block	(10xxxxxx)b (not (1001xxxx)b)
S-block	(11xxxxxx)b (not (1110xxxx)b and not (1101xxxx)b)

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 198

The following table describes the first byte of the defined block and frame coding.

Table C.1 — Block and frame coding

Bit	I-block PCB	R-block PCB	S-block PCB		REQB / WUPB	Slot-MARKER	SELECT	ATTRIB	HLTA	HLTB	RATS	PPS
			DESELECT	WTX								
b8	0	1	1		0	X	1	0	0	0	1	1
b7	0	0	1		0	X	0	0	1	1	1	1
b6	0 (RFU)	1	0	1	X	X	0	0	0	0	1	0
b5	Chaining	ACK/NAK	0	1	X	X	1	1	1	1	0	1
b4	CID	CID	CID		0	0	X	1	0	0	0	X
b3	NAD	0 (no NAD)	0 (no NAD)		1	1	X	1	0	0	0	X
b2	1	1 (RFU)	1 (RFU)		0	0	X	0	0	0	0	X
b1	block number	block number	0 (RFU)		1	1	X	1	0	0	0	X

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 199

ICS 35.240.15
Price based on 34 pages

© ISO/IEC 2001 – All rights reserved

IPR2025-01234
Apple EX1033 Page 200

INTERNATIONAL STANDARD

ISO/IEC 14443-4

First edition
2001-02-01

AMENDMENT 1
2006-03-15

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 4: Transmission protocol

AMENDMENT 1: Handling of reserved fields and values

Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact — Cartes de proximité —

Partie 4: Protocole de transmission

AMENDEMENT 1: Maniement de champs et valeurs réservés

Reference number
ISO/IEC 14443-4:2001/Amd.1:2006(E)

© ISO/IEC 2006

IPR2025-01234
Apple EX1033 Page 201

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 202

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO/IEC 14443-4:2001 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

As part of maintaining ISO/IEC 14443-4:2001, a need was raised to better clarify the handling of fields and values reserved by ISO/IEC for future use. This Amendment addresses the required document enhancements.

ISO/IEC 14443-4:2001 defines certain fields and values as Reserved for Future Use (RFU) by new ISO/IEC rules that may be added in later versions. This Amendment includes clarification that products in conformity with ISO/IEC 14443-4:2001 shall not improperly use RFU fields and values, plus documentation of product behaviour that, when followed by PICC and PCD designs commenced after publication of ISO/IEC 14443-4:2001, should assist with backward compatibility and interoperability for future definition by ISO of RFU fields and values. Consequently, many of the references to "should" may be changed into a definitive "shall" in the second edition of ISO/IEC 14443-4:2001; thus, it is recommended to implement them at this time.

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 203

Identification cards — Contactless integrated circuit(s) cards — Proximity cards —

Part 4: Transmission protocol

AMENDMENT 1: Handling of reserved fields and values

Page 3, Clause 4 "Symbols and abbreviated terms"

Replace the definition of RFU with the following: "Reserved for Future Use by ISO/IEC".

Page 6, Subclause 5.1 "Request for answer to select"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting FSDI = '9'-'F' is not compliant with this standard.

A received value of FSDI = '9'-'F' should be interpreted by the PICC as FSDI = '8' (FSD = 256 bytes).

A PCD setting CID = 15 is not compliant with this standard.

For PICC behaviour see 5.6.1.2 (c)."

Page 7, Subclause 5.2.3 "Format byte"

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC setting FSCI = '9'-'F' is not compliant with this standard.

A received value of FSCI = '9'-'F' should be interpreted by the PCD as FSCI = '8' (FSC = 256 bytes).

A PICC not setting b8 to 0 is not compliant with this standard.

The PCD should ignore b8 and its interpretation of any other field of the whole frame shall not change."

Page 8, Subclause 5.2.4 "Interface byte TA(1)"

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC setting b4 = 1 is not compliant with this standard.

A received value of TA(1) with b4 = 1 should be interpreted by the PCD as (b8 to b1) = (00000000)b (only ~106 kbit/s in both directions)."

Page 9, Subclause 5.2.5 "Interface byte TB(1)"

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 204

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC setting SFGI = 15 is not compliant with this standard.

Until the RFU value 15 is assigned by ISO, a PCD receiving SFGI = 15 should interpret it as SFGI = 0.

A PICC setting FWI = 15 is not compliant with this standard.

Until the RFU value 15 is assigned by ISO, a PCD receiving FWI = 15 should interpret it as FWI = 4."

Page 9, Subclause 5.2.6 "Interface byte TC(1)"

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC setting (b8 to b3) <> (000000)b is not compliant with this standard.

The PCD should ignore (b8 to b3) and its interpretation of (b2,b1) or of any other field of the whole frame shall not change."

Page 10, Subclause 5.3.1 "Start byte"


Replace the first list item with the following:

"

— The most significant half byte b8 to b5 shall be set to (1101)b and identifies the PPS.

"

In Figure 10, remove the arrows and RFU and link up bits b8 to b5 in one arrow marked as (1101)b as follows:

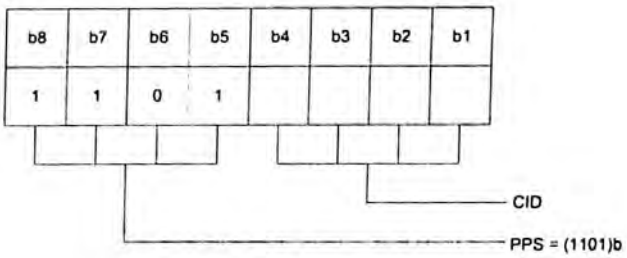

Page 11, Subclause 5.3.2 "Parameter 0"

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting (b4 to b1) <> (0001)b and/or setting (b8 to b6) <> (000)b is not compliant with this standard.

A PICC receiving (b4 to b1) <> (0001)b and/or receiving (b8 to b6) <> (000)b shall apply 5.6.2.2 (b)."

Page 11, Subclause 5.3.3 "Parameter 1"

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 205

Add the following paragraphs as the last paragraphs in the subclause:

"A PCD setting (b8 to b5) <> (0000)b is not compliant with this standard.

A PICC receiving (b8 to b5) <> (0000)b shall apply 5.6.2.2 (b)."

Page 12, Subclause 5.4 "Protocol and parameter selection response"

Add the following paragraph as the last paragraph in the subclause:

"The new bit rates shall become effective in the PICC immediately after it has sent the PPS response. A PCD that changes the bit rate when the PPS response is missing or invalid or when the PPSS returned by the PICC is not identical with the PPSS sent by the PCD is not compliant with this standard."

Page 12, Subclause 5.6.1.2 "PICC rules" item b)

Replace item b) with a new b) and c):

"

b) receives a valid block (HLTA):

— shall process the command and shall enter HALT state

c) receives an invalid block or RATS with RFU value:

— shall not respond and shall enter IDLE state or HALT state as specified in Figure 6 "PICC Type A State Diagram" of ISO/IEC 14443-3.

"

Page 15, Subclause 7.1.1.1 "Protocol control byte field"

Add the following paragraphs as the last paragraphs in the subclause:

"A PICC or PCD setting b6 <> 0 of an I-block is not compliant with this standard.

A PICC or PCD setting b2 <> 1 of an R-block is not compliant with this standard.

A PICC or PCD setting (b2,b1) <> (10)b of an S-block is not compliant with this standard."

Page 17, Subclause 7.1.1.2 "Card identifier field"

Add the following paragraphs as the last paragraphs in the second list item starting "The bits b6 and b5 ...":

"A PICC or PCD setting (b6,b5) <> (00)b is not compliant with this standard.

(b6,b5) <> (00)b shall be treated as a protocol error."

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 206

Page 17, Subclause 7.1.1.3 "Node address field"

Add the following paragraphs after the first paragraph starting "The NAD in the prologue ...":

"A PICC or PCD setting b8 <> 0 and/or b4 <> 0 is not compliant with this standard.

b8 <> 0 and/or b4 <> 0 shall be treated as a protocol error."

Page 18, Subclause 7.2 "Frame waiting time"

Add the following paragraphs as the last paragraphs in the subclause:

"The PICC shall not set FWI to the RFU value of 15.

Until the RFU value 15 is assigned by ISO, a PCD receiving FWI = 15 should interpret it as FWI = 4.

NOTE This clause is added for PCD's compatibility with future PICCs when ISO defines the RFU value 15."

Page 19, Subclause 7.3 "Frame waiting time extension"

Add the following paragraphs as the last paragraphs in the first list item starting with "The most significant bits b8 and b7 ...":

"A PCD not setting (b8,b7) = (00)b is not compliant with this standard.

The PICC shall treat (b8,b7) <> (00)b as protocol error."

Page 19, Subclause 7.3 "Frame waiting time extension"

Add the following paragraphs as the last paragraphs in the second list item starting with "The least significant bits b6 to b1 ...":

"A PICC setting WTXM = 0 or WTXM = 60-63 is not compliant with this standard.

When receiving WTXM = 0 or WTXM = 60-63 the PCD shall treat it as a protocol error."

Page 21, Subclause 7.5.3.2 "PICC rules"

Add a note after rule D:

"NOTE In accordance with 7.5.5, the PICC neither toggles its internal block number nor sends a response block, when an error is detected."

Page 21, Subclause 7.5.3.2 "PICC rules"

Add a note after rule E:

"NOTE There is no block number toggling when an R(NAK) block is received."

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 207

Page 22, Subclause 7.5.4.2 "PCD rules"

Add a note after rule 5:

"NOTE An R(ACK) block may be sent by the PCD only in case of PICC chaining, as the PICC response when receiving an R(ACK) block in other cases is not defined."

Page 22, Subclause 7.5.4.2 "PCD rules"

Add a note after rule 6:

"NOTE The last I-block re-transmission is not required out of PCD chaining. The PCD may determine the presence of a PICC by sending R(NAK) blocks at any time out of chaining (including before sending any I-block) and receiving R(ACK) from the PICC if present."

Page 22, Subclause 7.5.4.3 "PICC rules"

Add a note after rule 10:

"NOTE If the I-block received is empty then the mandatory I-block sent may either be empty or contain any applicative information (e.g. error code)."

Page 22, before Subclause 7.5.5 "Error detection and recovery"

Add a new subclause:

"

7.5.5 PICC presence check

The following methods may be used to check the presence of a PICC at any time out of chaining (including before any I-block exchange).

7.5.5.1 Method 1

The PCD may send an empty I-block and expect to receive an I-block from the PICC.

7.5.5.2 Method 2

Before the first I-block exchange, the PCD may send an R(NAK) block (with block number 0) and expect to receive an R(ACK) block from the PICC (rule 12).

After the first I-block exchange, the PCD may either

a) send an R(NAK) block (with current block number) and expect to receive an R(ACK) block from the PICC (rule 12), in which case the PCD should not retransmit its last I-block as mentioned in the note in rule 6; or

b) toggle its block number then send an R(NAK) block and expect to receive the last I-block from the PICC (rule 11).

"

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 208

Page 22, Subclause 7.5.5 "Error detection and recovery"

Renumber the clause to 7.5.6.

Add the following subclause title above the line "The following errors shall be detected by the PCD:":

"**7.5.6.1 Errors detected by the PCD**"

Change item a) text as follows:

"

a) Transmission error (Frame error or EDC error) or FWT time-out

The PCD shall attempt error recovery by the following techniques in the order shown:

— Application of PCD rules (see 7.5.4.2),

— Optionally apply PCD rules (see 7.5.4.2) once more,

— Use of S(DESELECT) request,

— Optionally use of S(DESELECT) request once more (as specified in Clause 8.2),

— Ignore the PICC.

"

Page 23, Subclause 7.5.5 "Error detection and recovery"

Add the following subclause title above the line "The following errors shall be detected by the PICC:":

"**7.5.6.2 Errors detected by the PICC**"

Page 27, Just before Clause B.3

Add a new subclause:

"

B.2.5 PICC Presence check

PICC presence check, method 1

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1, method 1		$I(0)_0$	===>		0	rule D
2.	rule B	1		<===	$I(0)_0$		rule 10 note

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 209

PICC presence check, method 2-a (before first I-block exchange)

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1, method 2-a		$R(NACK)_0$	===>			rule E note
2.				<===	$R(ACK)_1$		rule 12
3.	rule 6 note, method 2-a		$R(NACK)_0$	===>			rule E note
4.	rule 6 note			<===	$R(ACK)_1$		rule 12
5.			$I(0)_0$	===>		0	rule D
6.	rule B	1		<===	$I(0)_0$		rule 10

PICC presence check, method 2-a

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	===>		0	rule D
2.	rule B	1		<===	$I(0)_0$		rule 10
3.	method 2-a		$R(NACK)_1$	===>			rule E note
4.	rule 6 note			<===	$R(ACK)_0$		rule 12
5.			$I(0)_1$	===>		1	rule D
6.		0		<===	$I(0)_1$		rule 10

PICC presence check, method 2-b

	Comment	Block No. (0)	PCD		PICC	Block No. (1)	Comment
1.	rule 1		$I(0)_0$	===>		0	rule D
2.	rule B	1		<===	$I(0)_0$		rule 10
3.	method 2-b	0	$R(NACK)_0$	===>			
4.	rule B	1		<===	$I(0)_0$		rule 11
5.			$I(0)_1$	===>		1	rule D
6.	rule B	0		<===	$I(0)_1$		rule 10

"

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 210

ICS 35.240.15
Price based on 7 pages

© ISO/IEC 2006 – All rights reserved

IPR2025-01234
Apple EX1033 Page 211

RECEIVED
JUN 23 2008
ENGINEERING LIBRARY

IPR2025-01234
Apple EX1035 Page 212

Wert
Bookbinding
Grantville, PA
JAN-JUNE 2008
"We're Quality Bound"