

(12) **United States Patent**
Yang et al.

(10) **Patent No.:** **US 10,683,165 B2**
(45) **Date of Patent:** **Jun. 16, 2020**

(54) **TRASH CAN ASSEMBLY**

(71) Applicant: **simplehuman, LLC**, Torrance, CA (US)

(72) Inventors: **Frank Yang**, Rancho Palos Verdes, CA (US); **David Wolbert**, Redondo Beach, CA (US); **Joseph Sandor**, Newport Beach, CA (US); **Kenneth Yen**, Torrance, CA (US); **Orlando Cardenas**, Laguna Niguel, CA (US); **Michael James Basha**, Brisbane, CA (US); **Christopher B. Fruhauf**, San Anselmo, CA (US)

(73) Assignee: **simplehuman, LLC**, Torrance, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 223 days.

(21) Appl. No.: **15/783,370**

(22) Filed: **Oct. 13, 2017**

(65) **Prior Publication Data**
US 2018/0093827 A1 Apr. 5, 2018

Related U.S. Application Data

(63) Continuation of application No. 13/787,638, filed on Mar. 6, 2013, now Pat. No. 9,790,025.
(Continued)

(51) **Int. Cl.**
B65F 1/16 (2006.01)
B65F 1/04 (2006.01)
B65F 1/06 (2006.01)


(52) **U.S. Cl.**
CPC **B65F 1/1638** (2013.01); **B65F 1/04** (2013.01); **B65F 1/06** (2013.01); **B65F 1/068** (2013.01); **B65F 1/1646** (2013.01)

(58) **Field of Classification Search**
CPC B65F 1/1638
(Continued)

(56) **References Cited**
U.S. PATENT DOCUMENTS
830,182 A 9/1906 Skov
1,426,211 A 8/1922 Pausin
(Continued)
FOREIGN PATENT DOCUMENTS
AU 622536 4/1992
AU 365296 11/2015
(Continued)
OTHER PUBLICATIONS
U.S. Appl. No. 29/484,903, filed Mar. 13, 2014, Yang et al.
(Continued)
Primary Examiner — David Luo
(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson & Bear, LLP

(57) **ABSTRACT**
Various embodiments of a trash can assembly (e.g., a receptacle configured to receive refuse, recyclable materials, or otherwise), and related methods, are provided. Some embodiments of the trash can assembly include a body component and a lid configured to move between an open position and a closed position. In some variants, the lid can be moved between the open and closed positions by a power operated driving mechanism, such as a motor and/or other drivetrain components. In certain embodiments, the trash can assembly includes a clutch mechanism to facilitate manual operation of the lid while inhibiting or preventing damage to the motor and/or other drivetrain components.

23 Claims, 13 Drawing Sheets

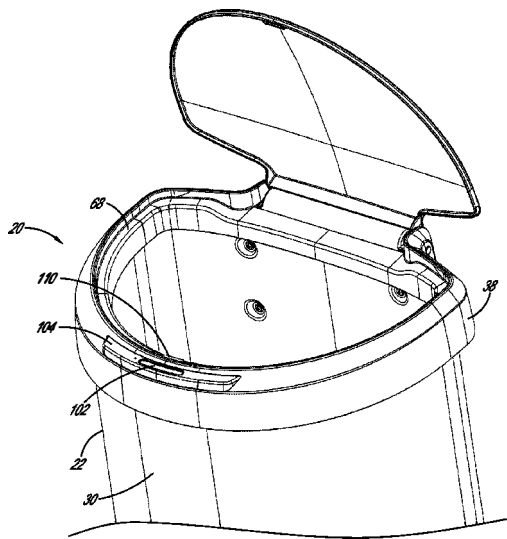

- Related U.S. Application Data**
- (60) Provisional application No. 61/609,233, filed on Mar. 9, 2012.
- (58) **Field of Classification Search**
USPC 318/3, 34
See application file for complete search history.

- (56) **References Cited**
U.S. PATENT DOCUMENTS

1,461,253 A	7/1923	Owen	4,892,223 A	1/1990	DeMent
1,754,802 A	4/1930	Raster	4,892,224 A	1/1990	Graham
1,820,555 A	8/1931	Buschman	D307,344 S	4/1990	Massonnet
1,891,651 A	12/1932	Padelford et al.	4,913,308 A	4/1990	Culbertson
1,922,729 A	8/1933	Geibel	4,915,347 A	4/1990	Iqbal et al.
1,980,938 A	11/1934	Geibel	4,918,568 A	4/1990	Stone et al.
2,308,326 A	1/1943	Calcagno	D308,272 S	5/1990	Koepsell
D148,825 S	2/1948	Snider	4,923,087 A	5/1990	Burrows
2,457,274 A	12/1948	Rifken	4,944,419 A	7/1990	Chandler
2,759,625 A	8/1956	Ritter	4,948,004 A	8/1990	Chich
2,796,309 A	6/1957	Taylor	4,964,523 A	10/1990	Bieltvedt et al.
2,888,307 A	5/1959	Graves et al.	4,972,966 A	11/1990	Craft, Jr.
2,946,474 A	7/1960	Knapp	4,996,467 A	2/1991	Day
3,008,604 A	11/1961	Garner	5,031,793 A	7/1991	Chen et al.
3,023,922 A	3/1962	Arrington et al.	5,048,903 A	9/1991	Loblein
3,137,408 A	6/1964	Taylor	5,054,724 A	10/1991	Hutcheson
3,300,082 A	1/1967	Patterson	5,065,272 A	11/1991	Owen et al.
3,392,825 A	7/1968	Gale et al.	5,065,891 A	11/1991	Casey
3,451,453 A	6/1969	Heck	5,076,462 A	12/1991	Perrone
3,654,534 A	4/1972	Fischer	D323,573 S	1/1992	Schneider
3,800,503 A	4/1974	Maki	5,090,585 A	2/1992	Power
3,820,200 A	6/1974	Myers	5,090,785 A	2/1992	Stamp
3,825,150 A	7/1974	Taylor	5,100,087 A	3/1992	Ashby
3,825,215 A	7/1974	Borglum	5,111,958 A	5/1992	Witthoeft
3,886,425 A	5/1975	Weiss	D327,760 S	7/1992	Donnelly
3,888,406 A	6/1975	Nippes	D329,929 S	9/1992	Knoedler et al.
3,891,115 A	6/1975	Ono	5,147,055 A	9/1992	Samson et al.
4,014,457 A	3/1977	Hodge	5,156,290 A	10/1992	Rodrigues
4,027,774 A	6/1977	Cote	D331,097 S	11/1992	Sieren
4,081,105 A	3/1978	Dagonnet et al.	5,170,904 A	12/1992	Neuhaus
4,189,808 A	2/1980	Brown	5,174,462 A	12/1992	Hames
4,200,197 A	4/1980	Meyer et al.	D332,852 S	1/1993	Delmerico
4,217,616 A	8/1980	Jessup	D335,562 S	5/1993	Evans
4,303,174 A	12/1981	Anderson	5,213,272 A	5/1993	Gallagher et al.
4,320,851 A	3/1982	Montoya	5,222,704 A	6/1993	Light
4,349,123 A	9/1982	Yang	D337,181 S	7/1993	Warman
4,357,740 A	11/1982	Brown	5,226,558 A	7/1993	Whitney et al.
4,416,197 A	11/1983	Kehl	5,230,525 A	7/1993	Delmerico et al.
4,417,669 A	11/1983	Knowles et al.	5,242,074 A	9/1993	Conaway et al.
4,457,483 A	7/1984	Gagne	D340,333 S	10/1993	Duran et al.
4,535,911 A	8/1985	Goulter	5,249,693 A	10/1993	Gillispie et al.
4,570,304 A	2/1986	Montreuil et al.	5,261,553 A	11/1993	Mueller et al.
4,576,310 A	3/1986	Isgar et al.	5,265,511 A	11/1993	Itzov
D284,320 S	6/1986	Kubic et al.	5,295,607 A	3/1994	Chang
4,609,117 A	9/1986	Pamment	5,305,916 A	4/1994	Suzuki et al.
4,630,332 A	12/1986	Bisbing	5,314,151 A	5/1994	Carter-Mann
4,630,752 A	12/1986	DeMars	5,322,179 A	6/1994	Ting
4,664,347 A	5/1987	Brown et al.	5,329,212 A	7/1994	Feigleson
4,697,312 A	10/1987	Freyer	5,348,222 A	9/1994	Patey
4,711,161 A	12/1987	Swin et al.	5,353,950 A	10/1994	Taylor et al.
4,729,490 A	3/1988	Ziegenbein	5,372,272 A	12/1994	Jennings
4,753,367 A	6/1988	Miller et al.	5,381,588 A	1/1995	Nelson
4,763,808 A	8/1988	Guhl et al.	5,385,258 A	1/1995	Sutherlin
4,765,548 A	8/1988	Sing	5,390,818 A	2/1995	LaBuda
4,765,579 A	8/1988	Robbins, III et al.	5,404,621 A	4/1995	Heinke
4,785,964 A	11/1988	Miller et al.	5,407,089 A	4/1995	Bird et al.
4,792,039 A	12/1988	Dayton	5,419,452 A	5/1995	Mueller et al.
4,794,973 A	1/1989	Perisic	5,471,708 A	12/1995	Lynch
4,813,592 A	3/1989	Stolzman	5,474,201 A	12/1995	Liu
4,823,979 A	4/1989	Clark, Jr.	5,501,358 A	3/1996	Hobday
4,834,260 A	5/1989	Auten	5,520,067 A	5/1996	Gaba
4,863,053 A	9/1989	Oberg	5,520,303 A	5/1996	Bernstein et al.
4,867,339 A	9/1989	Hahn	5,531,348 A	7/1996	Baker et al.
4,869,391 A	9/1989	Farrington	5,535,913 A	7/1996	Asbach et al.
4,884,717 A	12/1989	Bussard et al.	5,558,254 A	9/1996	Anderson et al.
4,888,532 A	12/1989	Josson	5,560,283 A	10/1996	Hannig
			5,584,412 A	12/1996	Wang
			D377,554 S	1/1997	Adriaansen
			5,611,507 A	3/1997	Smith
			5,628,424 A	5/1997	Gola
			5,632,401 A	5/1997	Hurd
			5,636,416 A	6/1997	Anderson
			5,636,761 A	6/1997	Diamond et al.
			5,644,111 A	7/1997	Cerny et al.
			5,645,186 A	7/1997	Powers et al.
			5,650,680 A	7/1997	Chula
			D383,277 S	9/1997	Peters
			5,662,235 A	9/1997	Nieto
			5,671,847 A	9/1997	Pedersen et al.

US 10,683,165 B2

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

5,690,247 A 11/1997 Boover
5,695,088 A 12/1997 Kasbohm
5,699,929 A 12/1997 Ouno
D388,922 S 1/1998 Peters
D389,631 S 1/1998 Peters
5,704,511 A 1/1998 Kellams
5,724,837 A 3/1998 Shin
5,730,312 A 3/1998 Hung
5,732,845 A 3/1998 Armaly, Jr.
5,735,495 A 4/1998 Kubota
5,738,239 A 4/1998 Triglia
5,770,935 A 6/1998 Smith et al.
5,799,909 A 9/1998 Ziegler
5,816,431 A 10/1998 Giannopoulos
5,816,640 A 10/1998 Nishimura
D401,383 S 11/1998 Gish
D401,719 S 11/1998 Van Leeuwen et al.
5,873,643 A 2/1999 Burgess, Jr. et al.
5,881,896 A 3/1999 Presnell et al.
5,881,901 A 3/1999 Hampton
5,884,237 A 3/1999 Kanki et al.
5,887,748 A 3/1999 Nguyen
D412,552 S 8/1999 Burrows
5,961,105 A 10/1999 Ehrnsberger et al.
5,967,392 A 10/1999 Niemi et al.
5,987,708 A 11/1999 Newton
6,000,569 A 12/1999 Liu
6,010,024 A 1/2000 Wang
6,024,238 A 2/2000 Jaros
6,036,050 A 3/2000 Ruane
6,102,239 A 8/2000 Wien
6,105,859 A 8/2000 Stafford
6,123,215 A 9/2000 Windle
D431,700 S 10/2000 Roudebush
6,126,031 A 10/2000 Reason
6,129,233 A 10/2000 Schiller
6,131,861 A 10/2000 Fortier, Jr. et al.
D435,951 S 1/2001 Yang et al.
6,209,744 B1 4/2001 Gill
6,211,637 B1 4/2001 Studer
6,234,339 B1 5/2001 Thomas
6,250,492 B1 6/2001 Verbeek
D445,980 S 7/2001 Tjugum
6,286,706 B1 9/2001 Tucker
6,328,320 B1 12/2001 Walski et al.
6,345,725 B1 2/2002 Lin
6,364,147 B1 4/2002 Meinzingner et al.
6,386,386 B1 5/2002 George
6,390,321 B1 5/2002 Wang
6,401,958 B1 6/2002 Foss et al.
6,519,130 B1 2/2003 Breslow
6,557,716 B1 5/2003 Chan
D476,456 S 6/2003 Englert et al.
6,596,983 B2 7/2003 Brent
6,612,099 B2 9/2003 Stravitz
6,626,316 B2 9/2003 Yang
6,626,317 B2 9/2003 Pfeifer et al.
6,632,064 B1 10/2003 Walker et al.
D481,846 S 11/2003 Lin
D482,169 S 11/2003 Lin
6,659,407 B2 12/2003 Asaro
6,681,950 B2 1/2004 Miller, Jr. et al.
D488,604 S 4/2004 Yang et al.
D488,903 S 4/2004 Yang et al.
D489,503 S 5/2004 Lin
D489,857 S 5/2004 Yang et al.
D490,583 S 5/2004 Yang et al.
D490,954 S 6/2004 Brand
D491,706 S 6/2004 Yang et al.
6,758,366 B2 7/2004 Bourgund et al.
D493,930 S 8/2004 Wang
D494,723 S 8/2004 Lin
6,774,586 B1 * 8/2004 Shih

B65F 1/06
100/43

6,785,912 B1 9/2004 Julio

6,812,655 B1 11/2004 Wang et al.
6,814,249 B2 11/2004 Lin
D499,450 S 12/2004 Goodman et al.
6,837,393 B1 1/2005 Kuo
6,857,538 B2 2/2005 Lin
6,859,005 B2 2/2005 Boliver
D503,021 S 3/2005 Yang et al.
6,866,826 B2 3/2005 Moore et al.
6,883,676 B2 4/2005 Lin
D507,090 S 7/2005 Yang et al.
6,920,994 B2 7/2005 Lin
6,974,948 B1 12/2005 Brent
D513,445 S 1/2006 Lin
6,981,606 B2 1/2006 Yang et al.
D517,764 S 3/2006 Wang
D517,767 S 3/2006 Yang et al.
D518,266 S 3/2006 Yang et al.
7,017,773 B2 3/2006 Gruber et al.
7,044,323 B2 5/2006 Yang
D525,756 S 7/2006 Yang et al.
7,073,677 B2 7/2006 Richardson et al.
7,077,283 B2 7/2006 Yang et al.
7,080,750 B2 7/2006 Wein et al.
7,086,550 B2 8/2006 Yang et al.
D528,726 S 9/2006 Lin
7,121,421 B2 10/2006 Yang et al.
D531,499 S 11/2006 Zaidman
D535,799 S 1/2007 Epps
D535,800 S 1/2007 Yang et al.
7,163,591 B2 1/2007 Kim et al.
7,168,591 B1 1/2007 Miller
D537,223 S 2/2007 Lin
D537,599 S 2/2007 Lin
D537,601 S 2/2007 Lin
D537,999 S 3/2007 Lin
D538,995 S 3/2007 Lin
D539,498 S 3/2007 Yang et al.
D540,001 S 4/2007 Zimmerman
D542,001 S 5/2007 Yang et al.
D542,995 S 5/2007 Lin
D543,673 S 5/2007 Yang et al.
D544,170 S 6/2007 Lin
D544,171 S 6/2007 Lin
D544,671 S 6/2007 Saunders et al.
D545,024 S 6/2007 Liao
7,225,943 B2 6/2007 Yang et al.
D547,020 S 7/2007 Chen
7,243,811 B1 7/2007 Ramsey
D550,918 S 9/2007 Wang et al.
D552,319 S 10/2007 Gusdorf
D552,321 S 10/2007 Yang et al.
D552,823 S 10/2007 Yang et al.
D552,824 S 10/2007 Zimmerman
D552,825 S 10/2007 Yang et al.
D555,320 S 11/2007 Yang et al.
D559,494 S 1/2008 Yang et al.
D559,495 S 1/2008 Yang et al.
D562,522 S 2/2008 Daams
7,328,842 B2 2/2008 Wagner et al.
D564,169 S 3/2008 Wang
D564,723 S 3/2008 Yang et al.
D566,367 S 4/2008 Lin
D566,369 S 4/2008 Shek
D566,923 S 4/2008 Lin
D567,468 S 4/2008 Yang et al.
D568,572 S 5/2008 Yang et al.
D569,720 S 5/2008 Lablaine
7,374,060 B2 5/2008 Yang et al.
D571,520 S 6/2008 Lin
7,395,990 B1 7/2008 Stevens
7,398,913 B2 7/2008 McClure
7,404,499 B1 7/2008 Ramsey
D574,569 S 8/2008 Yang et al.
D576,371 S 9/2008 Zimmerman
D578,265 S 10/2008 Presnell
D578,266 S 10/2008 Yang et al.
D578,268 S 10/2008 Yang et al.
D578,722 S 10/2008 Yang et al.
7,438,199 B1 10/2008 Tidrick

VOLUME DISTRIBUTEORS, Ex. 1001

VOLUME DISTRIBUTORS, INC. v. SIMPLEHUMAN LLC, IPR2024-00050

(56)

References Cited

U.S. PATENT DOCUMENTS

D580,120 S	11/2008	Lin	8,686,676 B2	4/2014	Yang et al.
D580,613 S	11/2008	Yang et al.	D704,406 S	5/2014	Kern
D580,615 S	11/2008	Yang et al.	8,716,969 B2	5/2014	Yang et al.
D581,622 S	11/2008	Presnell et al.	8,720,728 B2	5/2014	Yang et al.
D584,470 S	1/2009	Bizzell et al.	D709,662 S	7/2014	Yang et al.
D585,171 S	1/2009	Bizzell et al.	8,766,582 B2	7/2014	Yang et al.
D585,618 S	1/2009	Yang et al.	8,807,378 B2	8/2014	Kaberna
D586,070 S	2/2009	Lin	8,807,379 B1	8/2014	Hammond
7,494,021 B2	2/2009	Yang et al.	D714,510 S	9/2014	Yang et al.
D587,874 S	3/2009	Lin	D715,575 S	10/2014	Williams et al.
D593,271 S	5/2009	Yang et al.	D716,015 S	10/2014	van de Leest
7,530,578 B2	5/2009	Niemeyer et al.	8,851,316 B2	10/2014	Barrett et al.
7,540,396 B2	6/2009	Yang et al.	8,872,459 B2	10/2014	Yang et al.
7,543,716 B2	6/2009	Lin	D725,860 S	3/2015	Spivey et al.
7,559,433 B2	7/2009	Yang et al.	D725,861 S	3/2015	Yang et al.
D599,074 S	8/2009	Bizzell et al.	D730,008 S	5/2015	Yang et al.
D603,119 S	10/2009	Yang et al.	9,051,093 B2	6/2015	Yang et al.
7,607,552 B2	10/2009	Efstathiou	D755,461 S	5/2016	Wall
D604,472 S	11/2009	Blanks et al.	D758,686 S	6/2016	Beumer
7,614,519 B2	11/2009	Krauth et al.	D759,934 S	6/2016	Yang et al.
7,621,420 B2	11/2009	Bandoh et al.	D762,037 S	7/2016	Chen
7,656,109 B2	2/2010	Yang et al.	D765,937 S	9/2016	Chen
D611,216 S	3/2010	Yang et al.	D766,998 S	9/2016	Kao et al.
D611,217 S	3/2010	Bizzell et al.	9,434,538 B2	9/2016	Yang et al.
D611,671 S	3/2010	Yang et al.	D770,121 S	10/2016	Chen
7,694,838 B2	4/2010	Yang et al.	D771,344 S	11/2016	Yang et al.
7,703,622 B1	4/2010	Bynoe	D773,145 S	11/2016	Yang et al.
D615,270 S	5/2010	Yang et al.	9,481,515 B2	11/2016	Yang et al.
D615,722 S	5/2010	Yang et al.	D773,769 S	12/2016	Chen
7,712,285 B2	5/2010	Stravitz et al.	9,573,759 B2	2/2017	Yang et al.
7,741,801 B2	6/2010	Fukuizumi	9,586,755 B1	3/2017	Yang et al.
7,748,556 B2	7/2010	Yang et al.	D787,828 S	5/2017	Thoma et al.
7,781,995 B2	8/2010	Yang et al.	D790,145 S	6/2017	Chen
D623,817 S	9/2010	Yang et al.	D793,642 S	8/2017	Yang et al.
D625,068 S	10/2010	Shannon	D798,016 S	9/2017	Yang et al.
7,806,285 B2	10/2010	Yang et al.	D804,133 S	9/2017	Yang et al.
D627,533 S	11/2010	Yang et al.	9,751,692 B2	9/2017	Yang et al.
D627,944 S	11/2010	Wang et al.	9,790,025 B2	10/2017	Yang et al.
D629,172 S	12/2010	Liao	9,856,080 B2	1/2018	Yang et al.
D630,404 S	1/2011	Yang et al.	D820,544 S	6/2018	Joseph
D631,221 S	1/2011	Yang et al.	D825,876 S	8/2018	Chen
D632,039 S	2/2011	Yang et al.	D830,029 S	10/2018	Greenspoon et al.
D632,864 S	2/2011	Yang et al.	D858,024 S	8/2019	Yang et al.
D634,911 S	3/2011	Yang et al.	D858,923 S	9/2019	Yang et al.
D635,319 S	3/2011	Meyerhoffer	10,472,170 B2	11/2019	Yang et al.
7,896,187 B2	3/2011	Haibel	10,494,175 B2	12/2019	Yang et al.
7,922,024 B2	4/2011	Yang et al.	2001/0002690 A1	6/2001	Rosky
7,950,543 B2	5/2011	Yang et al.	2001/0020619 A1	9/2001	Pfeifer et al.
D644,390 S	8/2011	Smeets et al.	2001/0045512 A1	11/2001	Brent
7,992,742 B1	8/2011	Kim	2002/0066736 A1	6/2002	Pyles
8,006,857 B2	8/2011	Lin	2002/0092853 A1	7/2002	Wang
D644,806 S	9/2011	Yang et al.	2002/0096523 A1	7/2002	Pyles
D644,807 S	9/2011	Yang et al.	2002/0096524 A1	7/2002	Hardesty
D649,728 S	11/2011	Campbell	2002/0100758 A1	8/2002	Pyles
8,074,833 B2	12/2011	Yang et al.	2002/0104266 A1	8/2002	Ranaudo
8,096,445 B2	1/2012	Yang et al.	2002/0116924 A1	8/2002	Winkelmann et al.
D655,061 S	2/2012	Scaturro	2003/0089719 A1	5/2003	Berger
8,136,688 B2	3/2012	Lee et al.	2003/0102316 A1	6/2003	Forest
D657,108 S	4/2012	Yang et al.	2003/0201265 A1	10/2003	Lin
D657,109 S	4/2012	Liao	2003/0205979 A1	11/2003	Papari et al.
8,297,470 B2	10/2012	Yang et al.	2003/0230576 A1	12/2003	Lin
8,317,055 B2	11/2012	Zawrotny et al.	2004/0016756 A1	1/2004	Lin
D672,520 S	12/2012	Yang et al.	2004/0028572 A1	2/2004	Sham et al.
D673,750 S	1/2013	Quan	2004/0134924 A1	7/2004	Hansen et al.
D675,802 S	2/2013	Yang et al.	2004/0140782 A1	7/2004	Okabe et al.
D675,803 S	2/2013	Yang et al.	2004/0164077 A1	8/2004	Kuo
8,393,489 B1	3/2013	Stravitz	2004/0174268 A1	9/2004	Scott et al.
8,418,869 B2	4/2013	Yang et al.	2004/0175303 A1	9/2004	Lin
D689,255 S	9/2013	Sun Ting Kung et al.	2004/0199401 A1	10/2004	Wagner
8,567,630 B2	10/2013	Yang et al.	2004/0200938 A1	10/2004	Forlivio
8,569,980 B2	10/2013	Yang et al.	2004/0206758 A1	10/2004	Lin
8,575,537 B2	11/2013	Yao et al.	2004/0206760 A1	10/2004	Gagnebin
8,672,171 B2	3/2014	Wynn et al.	2004/0250711 A1	12/2004	Ernst
8,678,219 B1*	3/2014	Wang	2004/0251746 A1	12/2004	Ichimaru et al.
			2005/0017006 A1	1/2005	Kuo
			2005/0017010 A1	1/2005	Siegel et al.
			2005/0029281 A1	2/2005	Westermann et al.
			2005/0129803 A1	6/2005	Umeda et al.
			2005/0258177 A1	11/2005	Woodson

(56)

References Cited

U.S. PATENT DOCUMENTS

2005/0258794 A1 11/2005 Fukuizumi
 2006/0027579 A1 2/2006 Yang et al.
 2006/0103086 A1 5/2006 Niemeyer et al.
 2006/0138149 A1 6/2006 Tracy
 2006/0163257 A1 7/2006 Golbert
 2006/0175336 A1 8/2006 Wang
 2006/0186121 A1 8/2006 Yang et al.
 2006/0196874 A1 9/2006 Yang
 2006/0237641 A1 10/2006 Moeller et al.
 2006/0249510 A1 11/2006 Lin
 2006/0278643 A1 12/2006 Chiou
 2007/0012699 A1 1/2007 Yang et al.
 2007/0034334 A1 2/2007 Ramsey et al.
 2007/0045326 A1 3/2007 Tramontina et al.
 2007/0090112 A1 4/2007 Kalman et al.
 2007/0114847 A1 5/2007 Ichimaru et al.
 2007/0181579 A1 8/2007 Kuo et al.
 2007/0209846 A1 9/2007 Wilson
 2007/0215622 A1 9/2007 Perez
 2007/0241109 A1 10/2007 Lin
 2007/0266637 A1 11/2007 McGowan
 2007/0272691 A1 11/2007 Wang et al.
 2007/0289972 A1 12/2007 Wynn et al.
 2008/0011754 A1 1/2008 Ramsey
 2008/0011910 A1 1/2008 Ramsey
 2008/0041863 A1 2/2008 Forest
 2008/0083756 A1 4/2008 Daniels
 2008/0083757 A1 4/2008 Parker et al.
 2008/0099274 A1 5/2008 Seel
 2008/0128428 A1 6/2008 Beckerman
 2008/0164257 A1 7/2008 Boll et al.
 2008/0236275 A1 10/2008 Breed et al.
 2008/0257889 A1 10/2008 Kovacevich et al.
 2008/0257890 A1 10/2008 Kovacevich et al.
 2008/0257891 A1 10/2008 Kovacevich et al.
 2008/0264948 A1 10/2008 Kovacevich et al.
 2008/0264950 A1 10/2008 Kovacevich et al.
 2008/0272119 A1 11/2008 Efstathiou
 2008/0272127 A1 11/2008 Kovacevich et al.
 2009/0071959 A1 3/2009 Cheung
 2009/0084788 A1 4/2009 Yang et al.
 2009/0136341 A1 5/2009 Kenyon
 2009/0230131 A1 9/2009 McDuffie et al.
 2009/0261105 A1 10/2009 Cunningham et al.
 2009/0266836 A1 10/2009 Mobley
 2010/0006572 A1 1/2010 Chiou
 2010/0084235 A1 4/2010 Lu
 2010/0096894 A1 4/2010 Fukai
 2010/0122985 A1 5/2010 Peters et al.
 2010/0147865 A1 6/2010 Yang et al.
 2010/0170904 A1 7/2010 Kalman et al.
 2010/0178105 A1 7/2010 Monneret
 2010/0193518 A1 8/2010 Tontarelli
 2010/0237074 A1 9/2010 Yang et al.
 2010/0252557 A1 10/2010 Clements
 2010/0294769 A1 11/2010 Lee et al.
 2011/0017735 A1 1/2011 Wang et al.
 2011/0049149 A1 3/2011 Shih
 2011/0056952 A1 3/2011 Borowski et al.
 2011/0139781 A1 6/2011 Jin et al.
 2011/0272409 A1 11/2011 Kasbohm
 2012/0145932 A1 6/2012 Yao et al.
 2012/0234849 A1 9/2012 Hughes et al.
 2012/0261423 A1 10/2012 Zawrotny et al.
 2013/0048641 A1 2/2013 Romano
 2013/0097809 A1 4/2013 Weber et al.
 2013/0098913 A1 4/2013 Yang et al.
 2013/0105487 A1 5/2013 Baik
 2013/0240592 A1 9/2013 Woodruff
 2013/0248535 A1 9/2013 Wolfe et al.
 2013/0300119 A1 11/2013 Anzalon et al.
 2014/0183193 A1 7/2014 Hammond et al.
 2014/0238989 A1 8/2014 Wang et al.
 2014/0305946 A1 10/2014 Han
 2014/0345453 A1 11/2014 Oh et al.

2015/0251849 A1 9/2015 Yang et al.
 2015/0259139 A1 9/2015 Yang et al.
 2015/0321841 A1 11/2015 Salas et al.
 2016/0200508 A1 7/2016 Thoma et al.
 2017/0050404 A1 2/2017 Henken et al.
 2017/0127669 A1 5/2017 Yang et al.
 2017/0166167 A1 6/2017 Heller et al.
 2017/0253429 A1 9/2017 Yang et al.
 2019/0077595 A1 3/2019 Wang et al.
 2019/0185263 A1 6/2019 Yang et al.
 2019/0276232 A1 9/2019 Yang et al.

FOREIGN PATENT DOCUMENTS

CA 2182840 9/1997
 CA 2519295 3/2007
 CA 132181 6/2010
 CA 2695086 9/2010
 CA 136938 5/2011
 CA 141819 4/2012
 CA 146601 2/2013
 CA 152797 4/2014
 CA 158595 4/2015
 CA 158685 4/2015
 CA 164264 10/2016
 CA 164265 10/2016
 CA 167073 10/2016
 CN 2075182 U 4/1991
 CN 101177946 A 5/2008
 CN 201105898 Y 8/2008
 CN 201372076 Y 12/2009
 CN 201447201 U 5/2010
 CN 201512253 U 6/2010
 CN 201597962 U 10/2010
 CN 301947175 S 6/2012
 CN 103207416 A 7/2013
 CN 103300590 A 9/2013
 CN 103303618 A 9/2013
 CN 302771721 S 3/2014
 CN 104016030 A 9/2014
 CN 303188855 S 4/2015
 CN 303206241 S 5/2015
 CN 303611394 S 3/2016
 CN 303622098 S 3/2016
 CN 205169479 U 4/2016
 CN 303967208 S 12/2016
 CN 304018339 S 1/2017
 CN 304018340 S 1/2017
 DE 1610087 7/1950
 DE 822376 11/1951
 DE 1283741 7/1966
 DE 8436939 3/1985
 DE 9108341 10/1991
 DE 4225936 2/1994
 DE 19525885 3/1997
 DE 19617823 11/1997
 DE 19809331 5/1999
 DE 29918687 3/2000
 DE 19933180 1/2001
 DE 10148997 4/2003
 DE 20217561 3/2004
 DE 10337806 A1 3/2005
 EP 0582240 7/1993
 EP 0903305 A1 3/1999
 EP 0906876 A2 4/1999
 EP 1094017 A1 4/2001
 EP 1361176 A1 11/2003
 EP 1136393 B1 4/2004
 EP 1447342 A2 8/2004
 EP 1600373 A2 11/2005
 EP 1647503 A1 4/2006
 EP 1686073 A1 8/2006
 EP 1918223 A1 5/2008
 EP 1700799 B1 8/2009
 EP 001164826-0001 9/2009
 EP 001232904-0001 10/2010
 EP 2343250 A1 7/2011
 EP 001908575-0001 8/2011
 EP 001317416-0001 4/2012

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	001317416-0002	4/2012
EP	001335285-0001	7/2012
EP	001335293-0001	7/2012
EP	001381636-001	8/2013
EP	001381792-0001	8/2013
EP	2636611 A1	9/2013
EP	3144251 A1	3/2014
EP	001420590-0001	9/2014
EP	2772454 A2	9/2014
EP	2636613 B1	3/2015
EP	2915763 A1	9/2015
EP	2918518 A2	9/2015
EP	002766782-0001	11/2015
EP	002766782-0002	11/2015
EP	002766881-0001	11/2015
EP	2364932 B1	4/2016
EP	3042864 A1	7/2016
EP	003177500-0001	9/2016
EP	003177500-0002	9/2016
EP	003362235-0001	10/2016
EP	003362052-0001	11/2016
EP	3214019 A1	9/2017
FR	2887152	12/2006
GB	191004921	6/1910
GB	2384418	7/2003
JP	02-152670	6/1990
JP	H06-56011	8/1994
JP	06-272888	9/1994
JP	2004-106713	4/2004
JP	2004-231237	8/2004
JP	D1300450	5/2007
JP	D1300451	5/2007
JP	D1322056	2/2008
JP	D1398668	10/2010
JP	D1550907	4/2016
JP	D1551184	4/2016
KR	3003841370000	6/2005
KR	3004095430000	3/2006
KR	3004095430001	7/2006
NL	6908550	12/1970
TW	183920	5/1992
TW	230977	9/1994
TW	395392	6/2000
TW	D112733	9/2006
TW	D129485	7/2009
TW	D133382	2/2010
TW	D133678	3/2010
TW	145989	3/2012
TW	D147147	5/2012
TW	D154797	7/2013
TW	D158187	1/2014

TW	D161587	7/2014
TW	D162495	8/2014
TW	D168957	7/2015
TW	D170334	9/2015
TW	201538406	10/2015
TW	D176312	6/2016
TW	D176313	6/2016
TW	D183552	6/2017
TW	D184449	7/2017
WO	WO 92/02430 A1	2/1992
WO	WO 96/33671	10/1996
WO	WO 2005/080232 A1	9/2005
WO	WO 2006/079263 A1	8/2006
WO	WO 2007/139570	12/2007
WO	WO 2009/114495 A1	9/2009
WO	WO 2015/134902 A1	9/2015
WO	WO 2015/138625 A1	9/2015
WO	WO 2016/054109 A1	4/2016

OTHER PUBLICATIONS

U.S. Appl. No. 29/584,385, filed Nov. 14, 2016, Yang et al.
 U.S. Appl. No. 15/476,285, filed Mar. 31, 2017, Yang et al.
 U.S. Appl. No. 29/583,627, filed Jun. 22, 2017, Yang et al.
 U.S. Appl. No. 29/608,587, filed Jun. 22, 2017, Yang et al.
 U.S. Appl. No. 29/610,345, filed Jul. 11, 2017, Yang et al.
 U.S. Appl. No. 15/809,218, filed Nov. 10, 2017, Yang et al.
 Simplehuman Liner Rim Dual Bucket Rectangular Recycler with Liner Pocket, Stainless Steel, 58 Liter / 15 Gallon, Item No. CW2025, www.Amazon.com, site visited Dec. 29, 2015.
 Trento Corner 23 Trash Can, Hailo product webpage, May 2008, http://www.hailo.de/html/default.asp?site=12_71_107&lang=en.
 Office Action for Chinese Application No. 201310076306.0, dated Dec. 23, 2015, in 14 pages.
 Office Action for Chinese Application No. 201310076306.0, dated Aug. 30, 2016, in 17 pages.
 Office Action for Chinese Application No. 201310076306.0, dated Jan. 25, 2017, in 18 pages.
 Extended European Search Report for European Application No. 13158229.8, dated Jul. 2, 2013, in 8 pages.
 Search Report for Taiwanese Design Application No. 102302061, dated Jun. 20, 2013, in 1 page.
 Web page showing picture of Hero Bullet trash can, archived Nov. 17, 2004, downloaded from http://web.archive.org/web/20041117003115/http://www.simplehuman.com/images/hero_bullet.jpg.
 Office Action for European Application No. 13158229.8, dated Jul. 12, 2018, in 5 pages.
 Office Action for European Application No. 13158229.8, dated Jun. 27, 2019, in 5 pages.

* cited by examiner

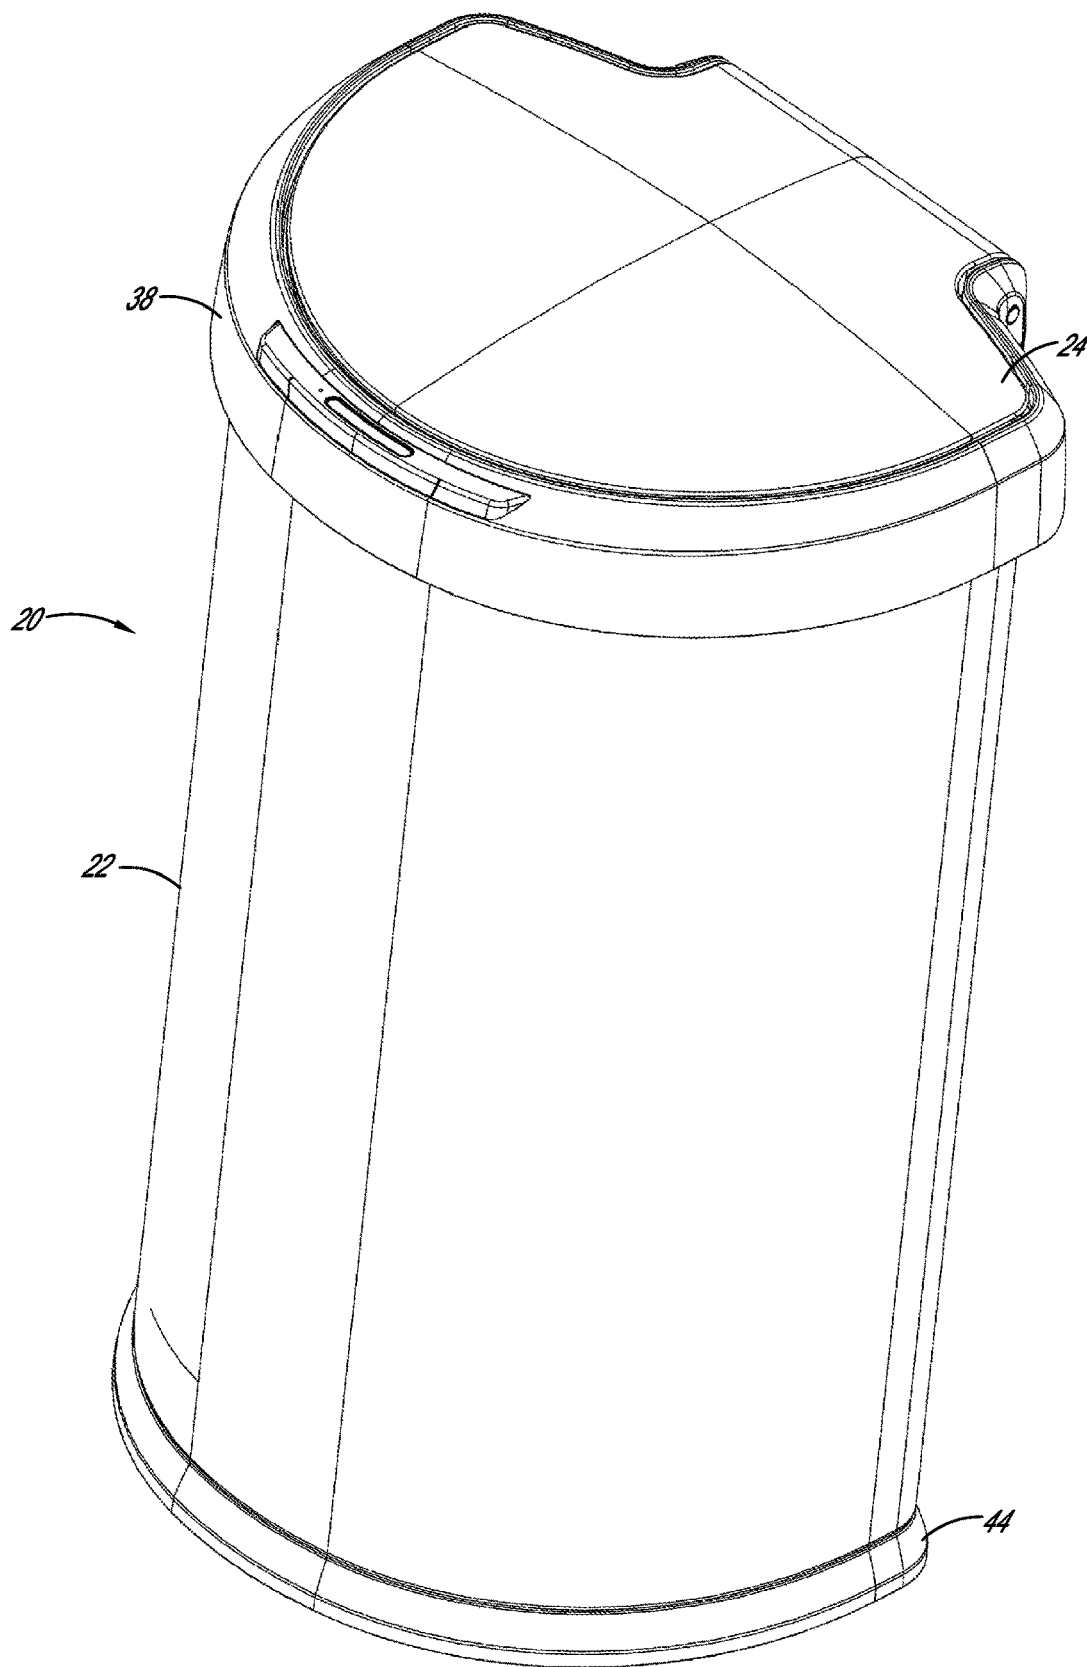
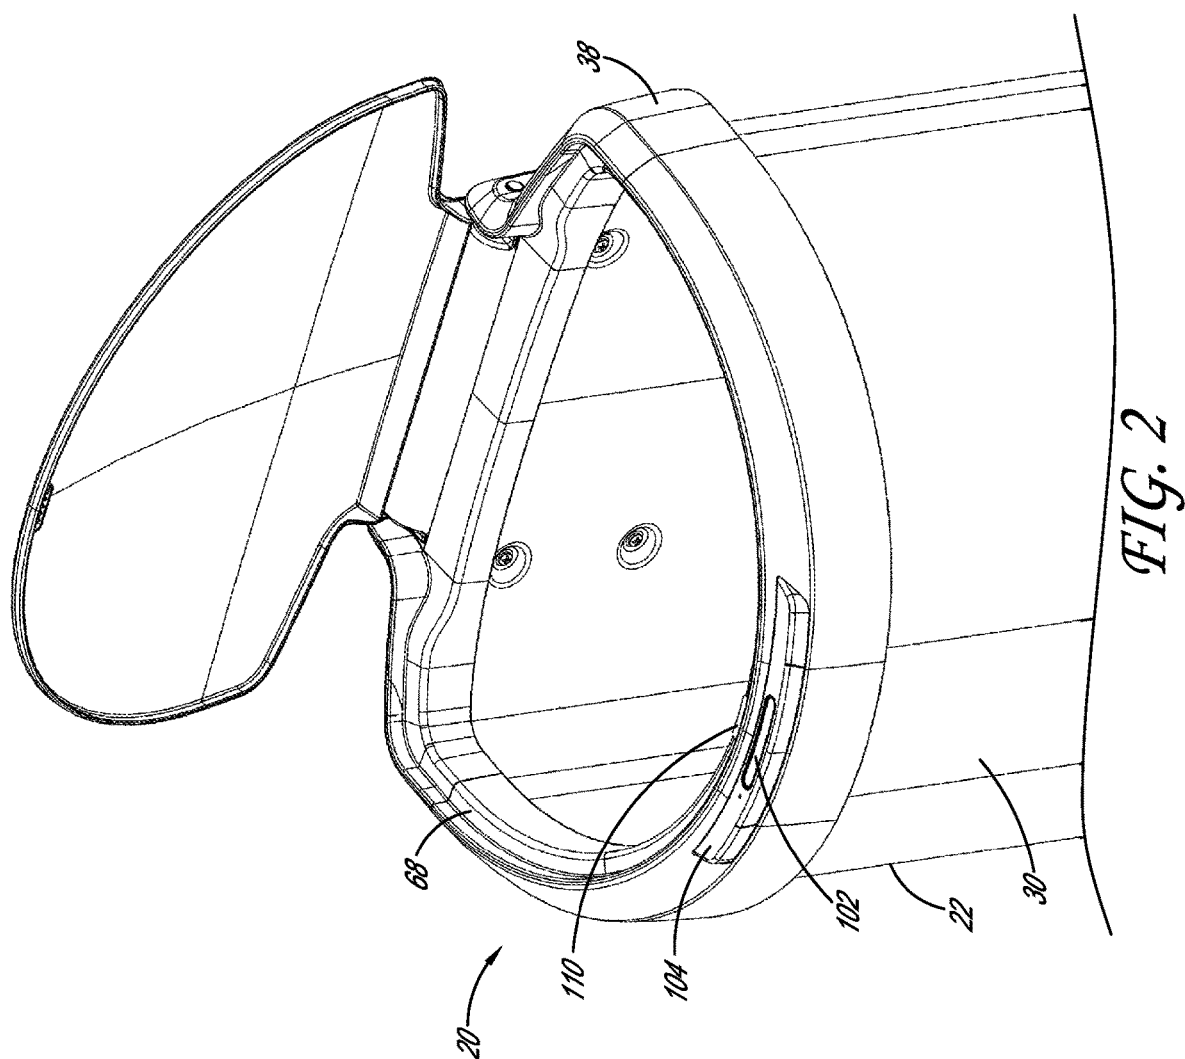


FIG. 1



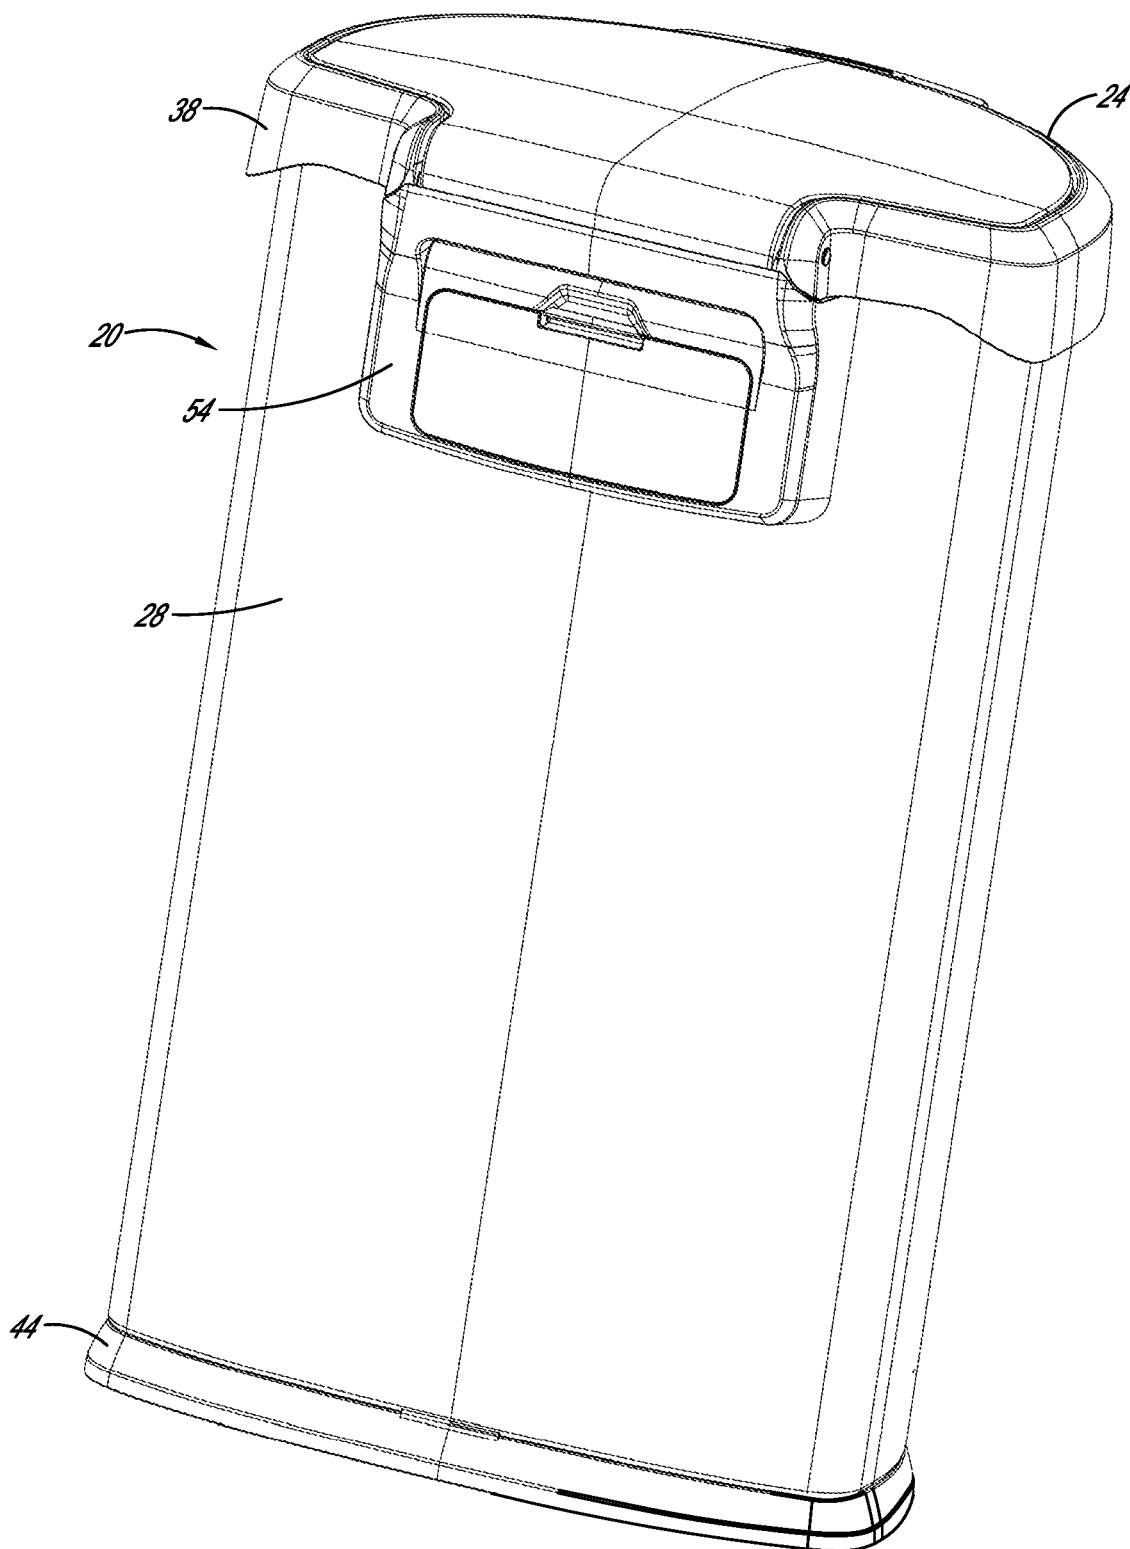


FIG. 3

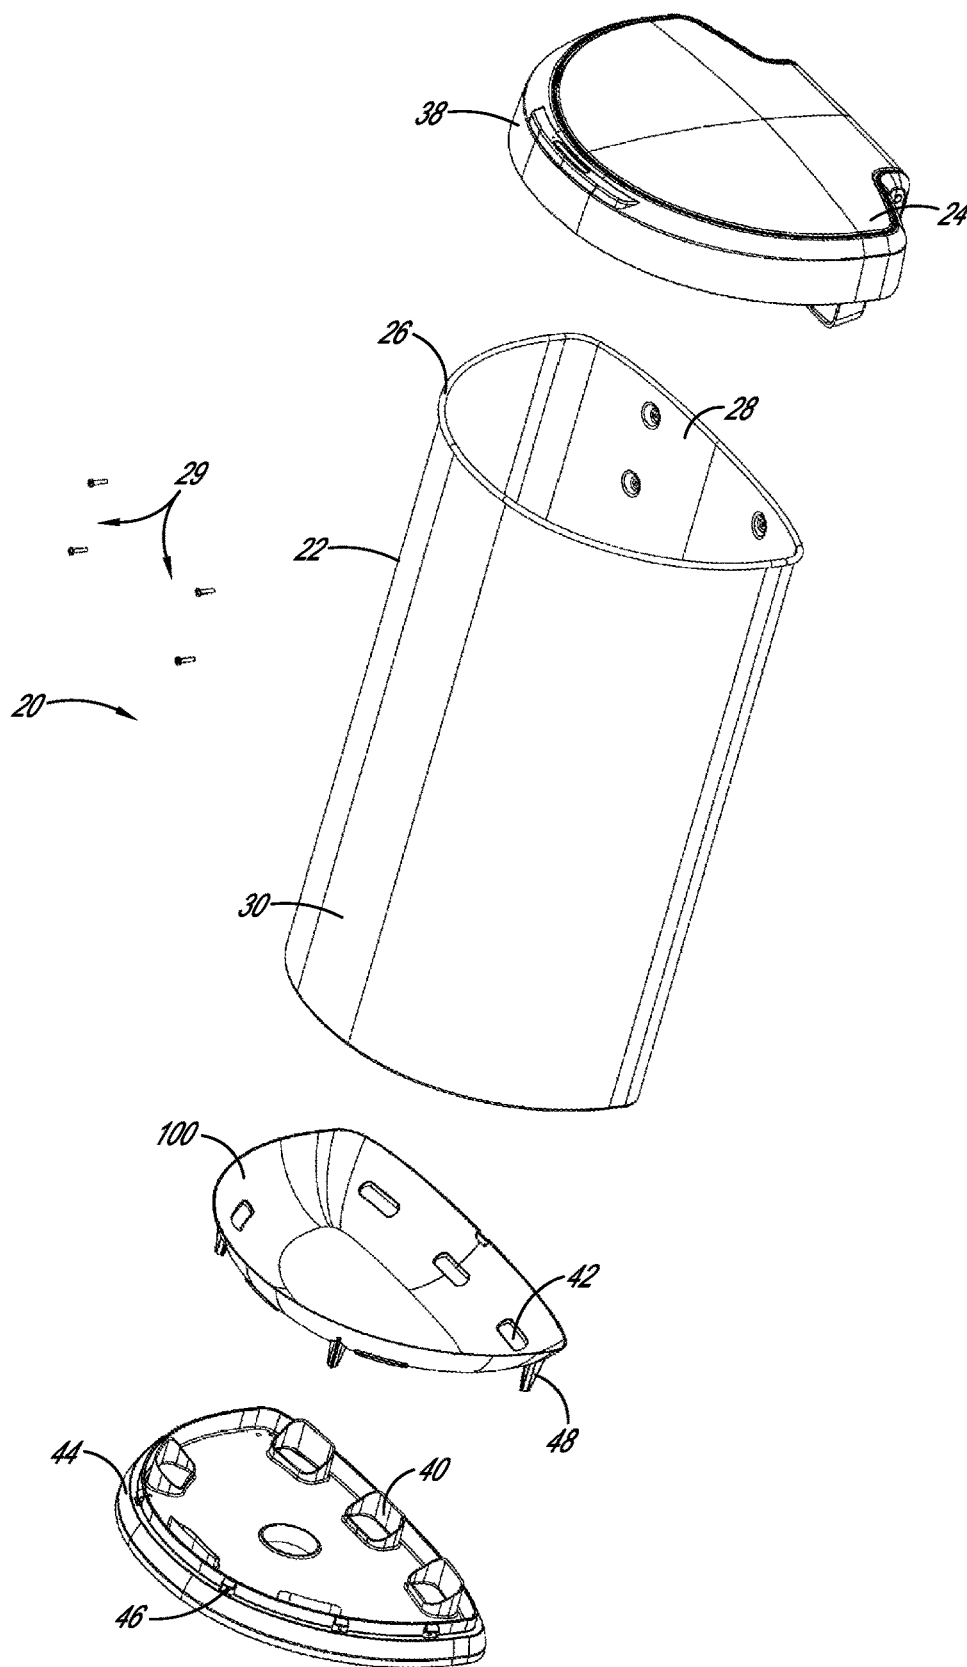


FIG. 4

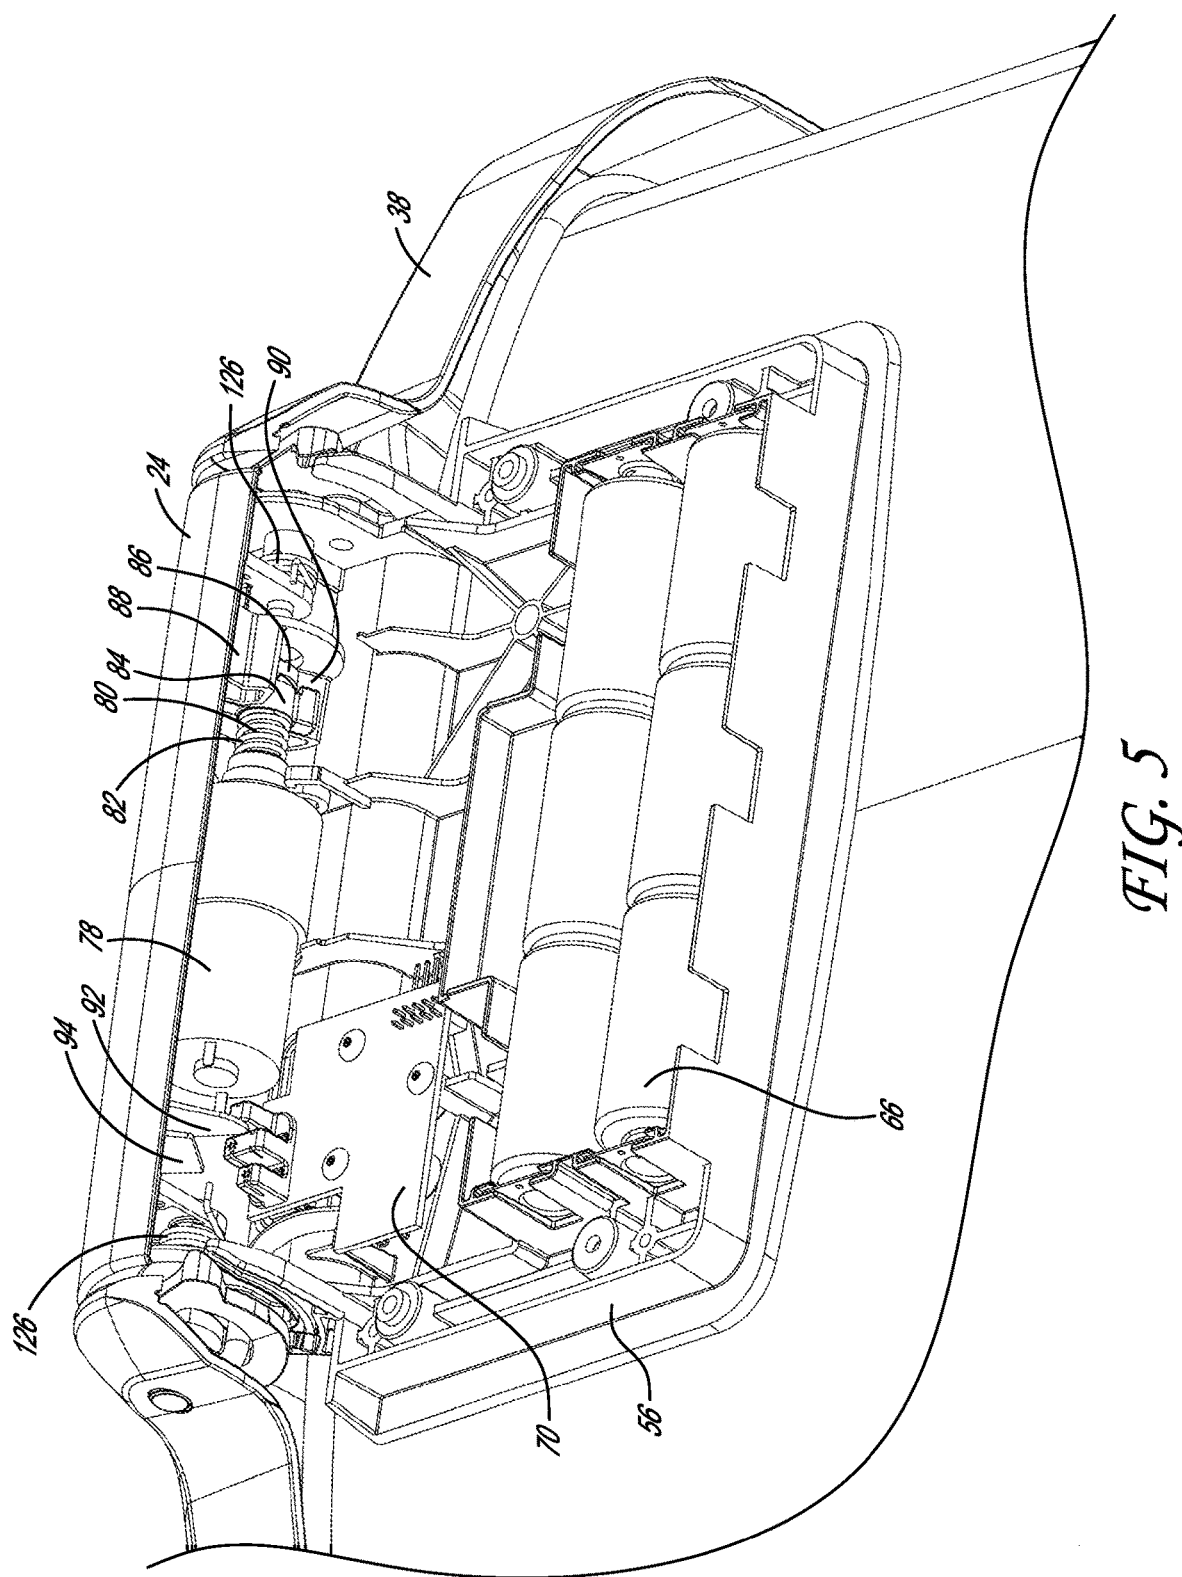
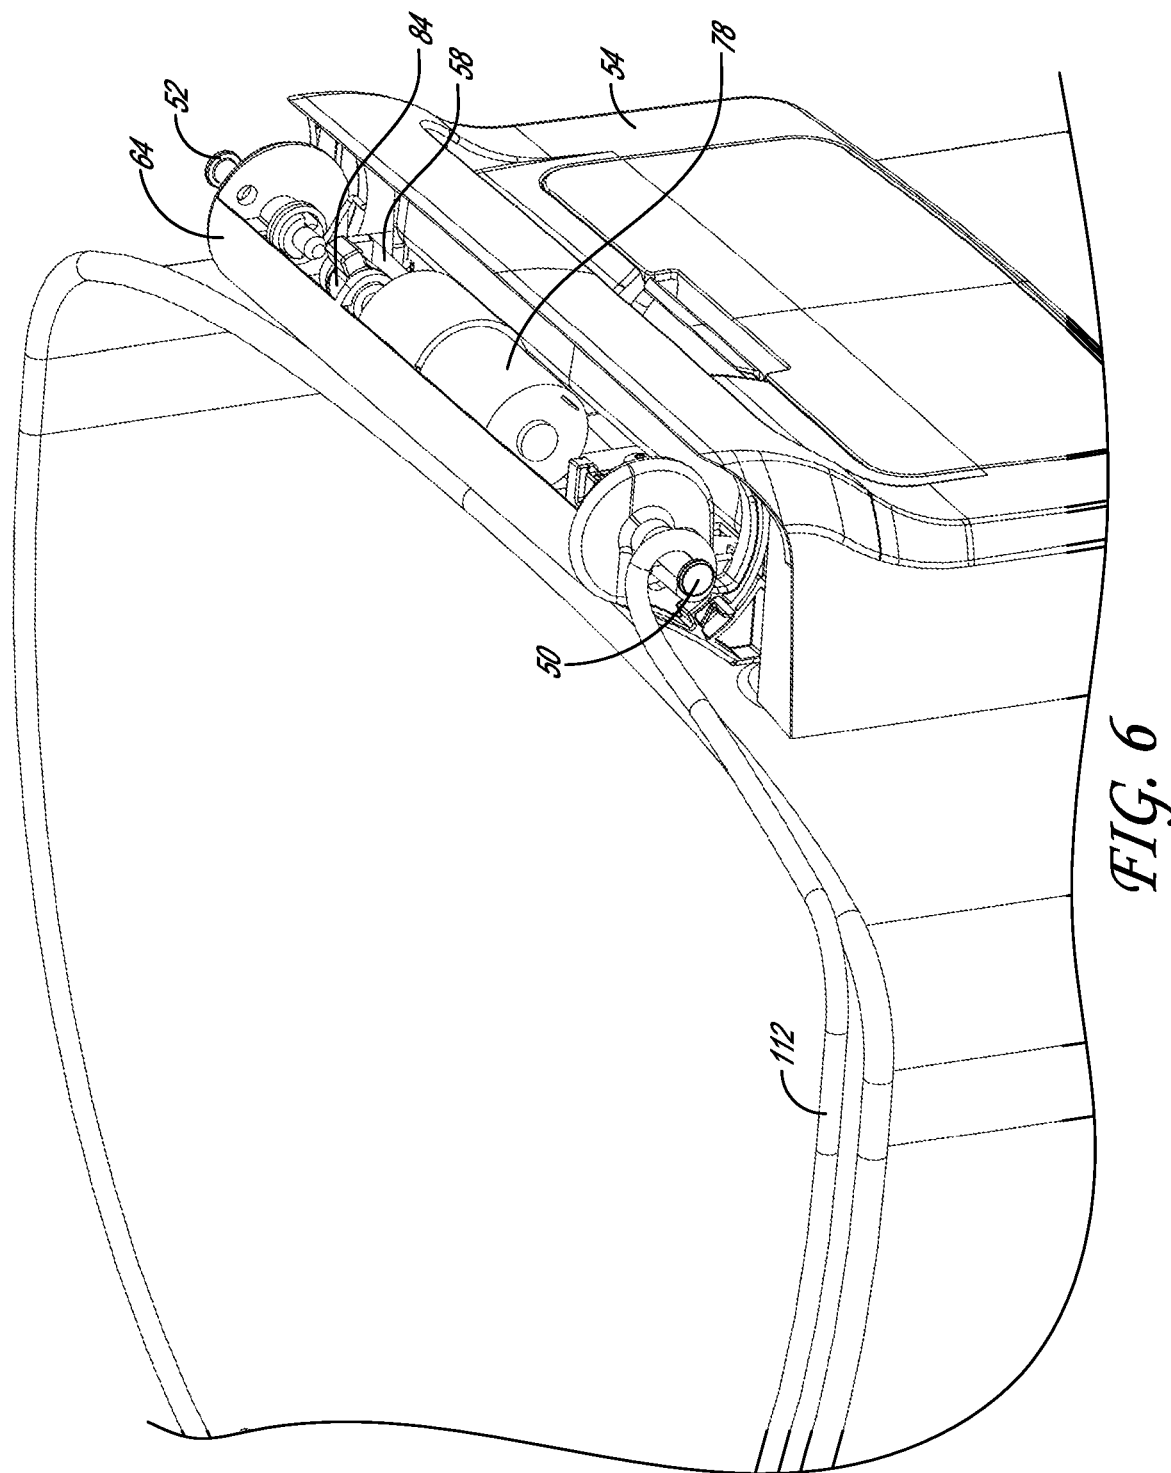


FIG. 5



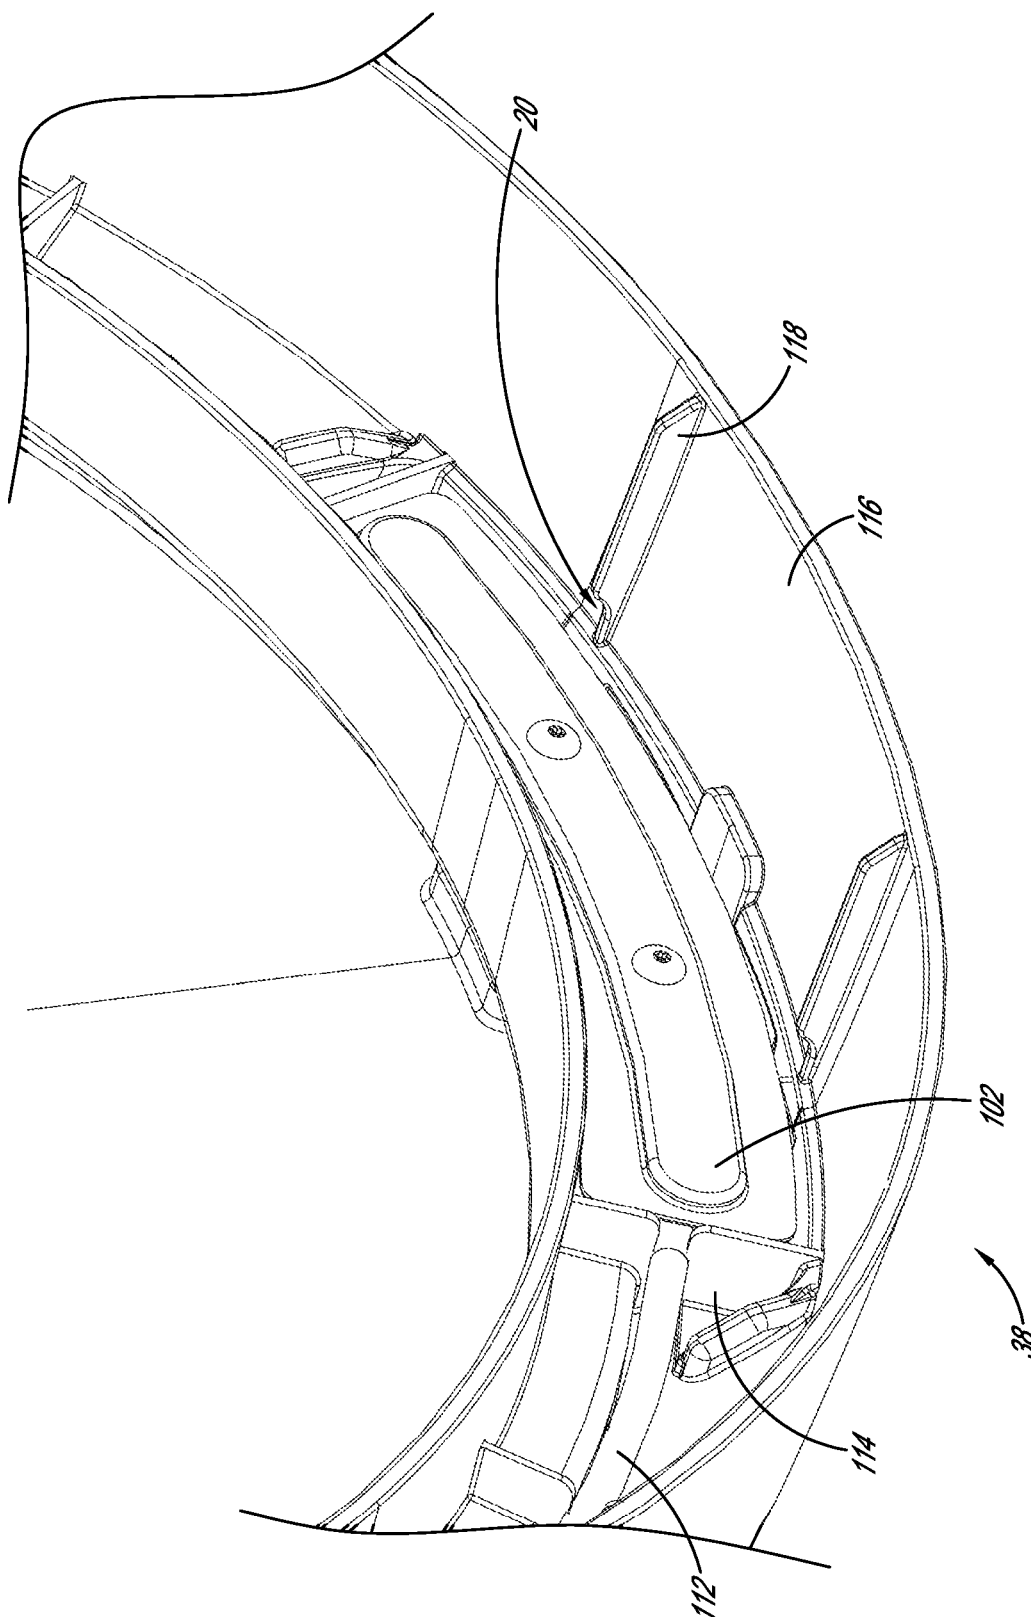


FIG. 7

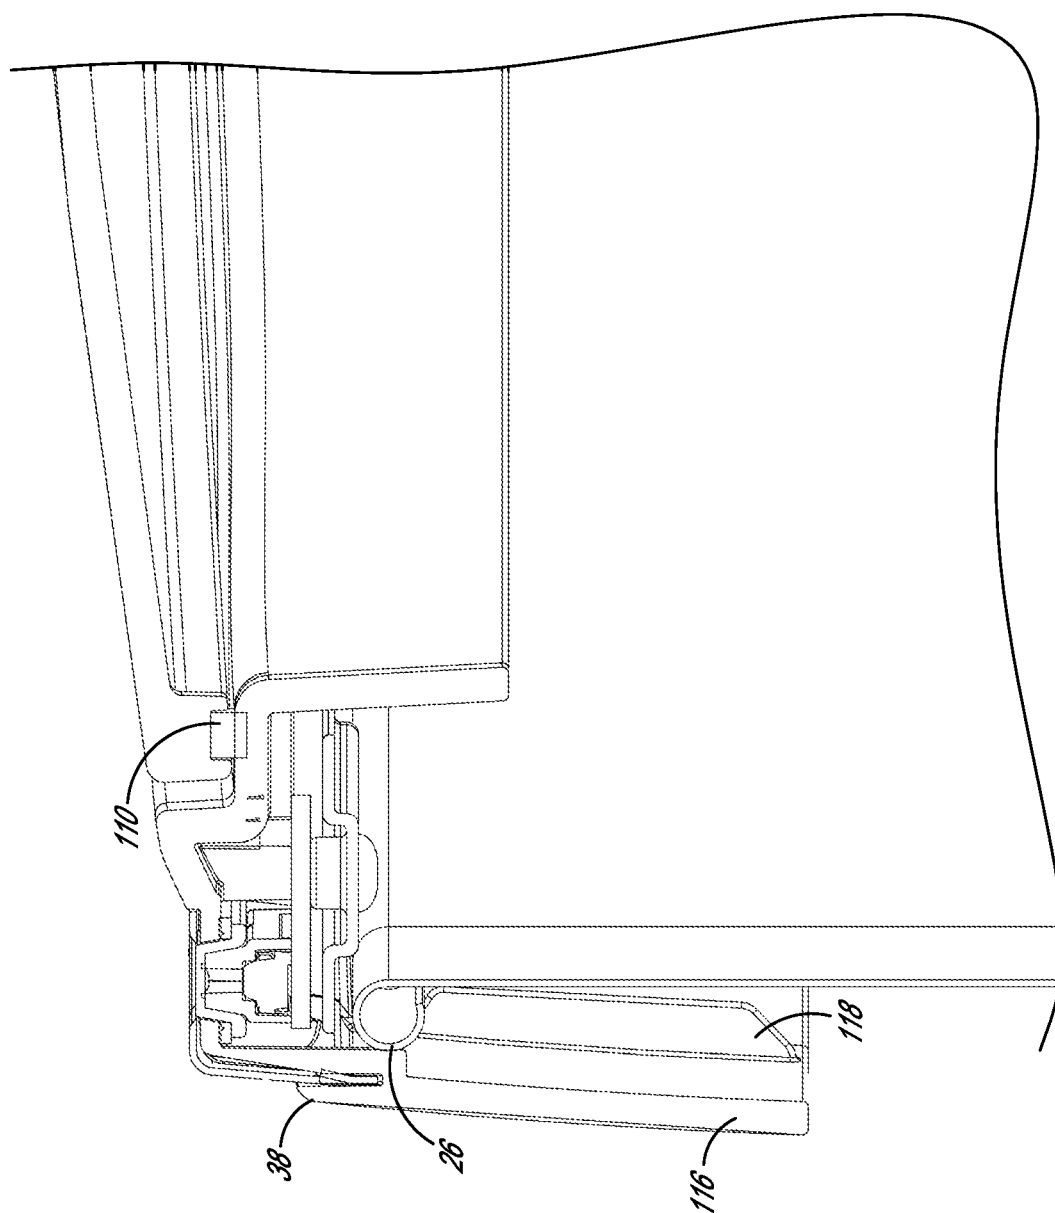


FIG. 8

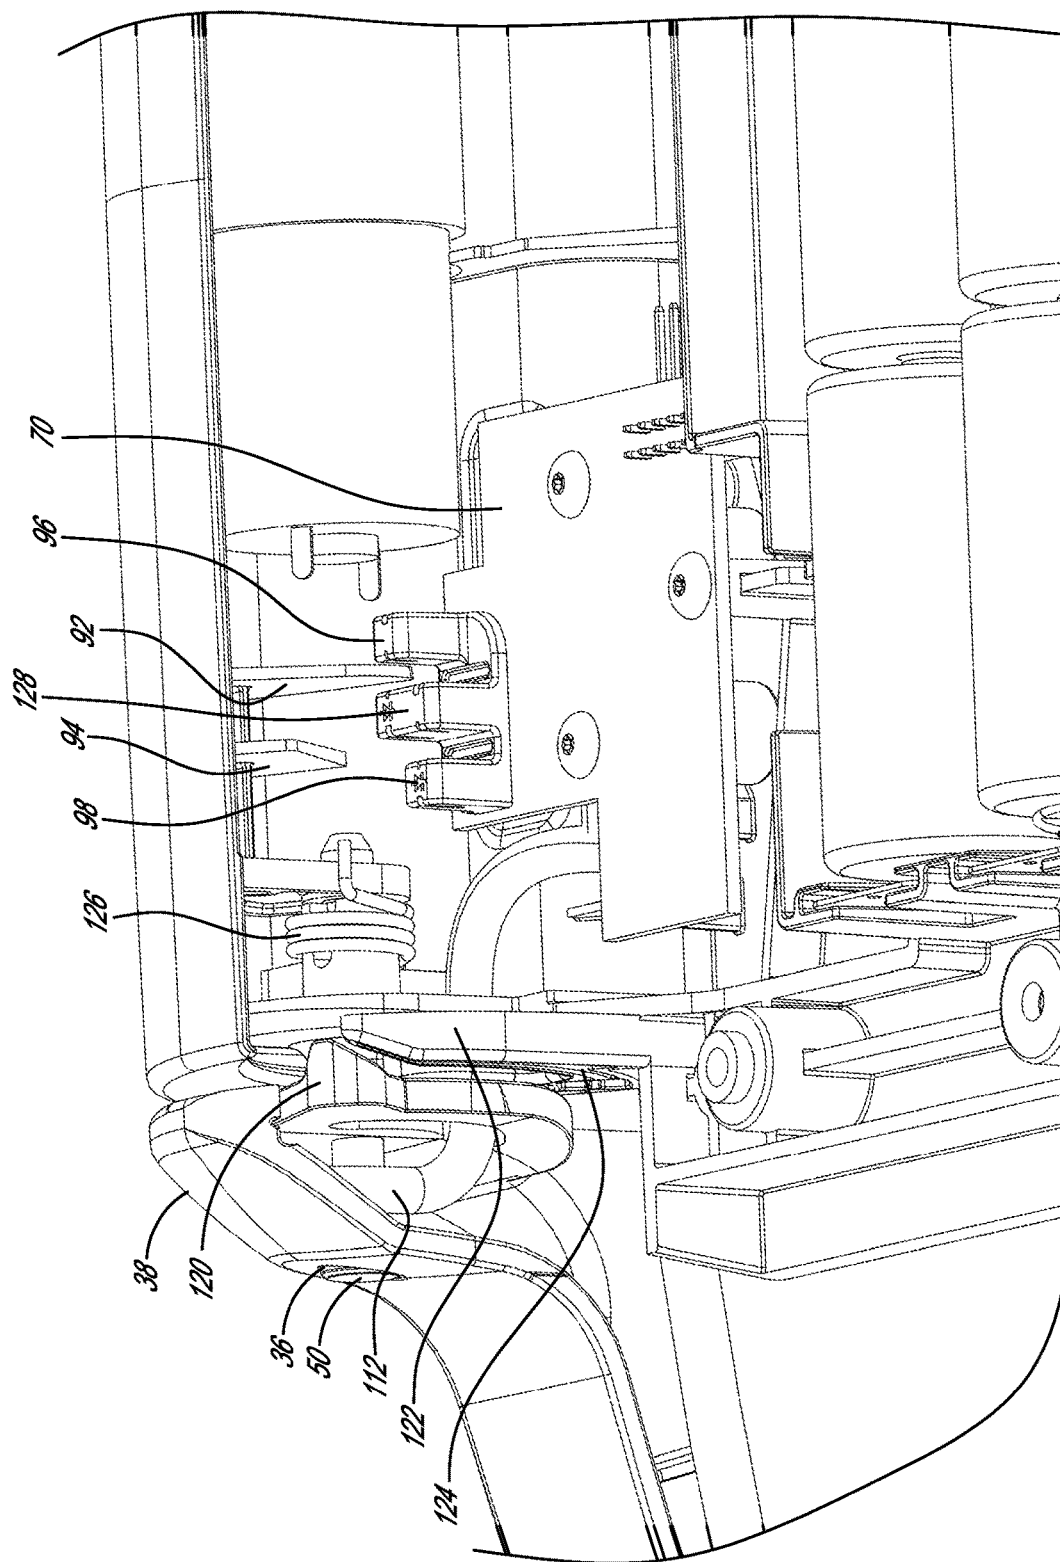
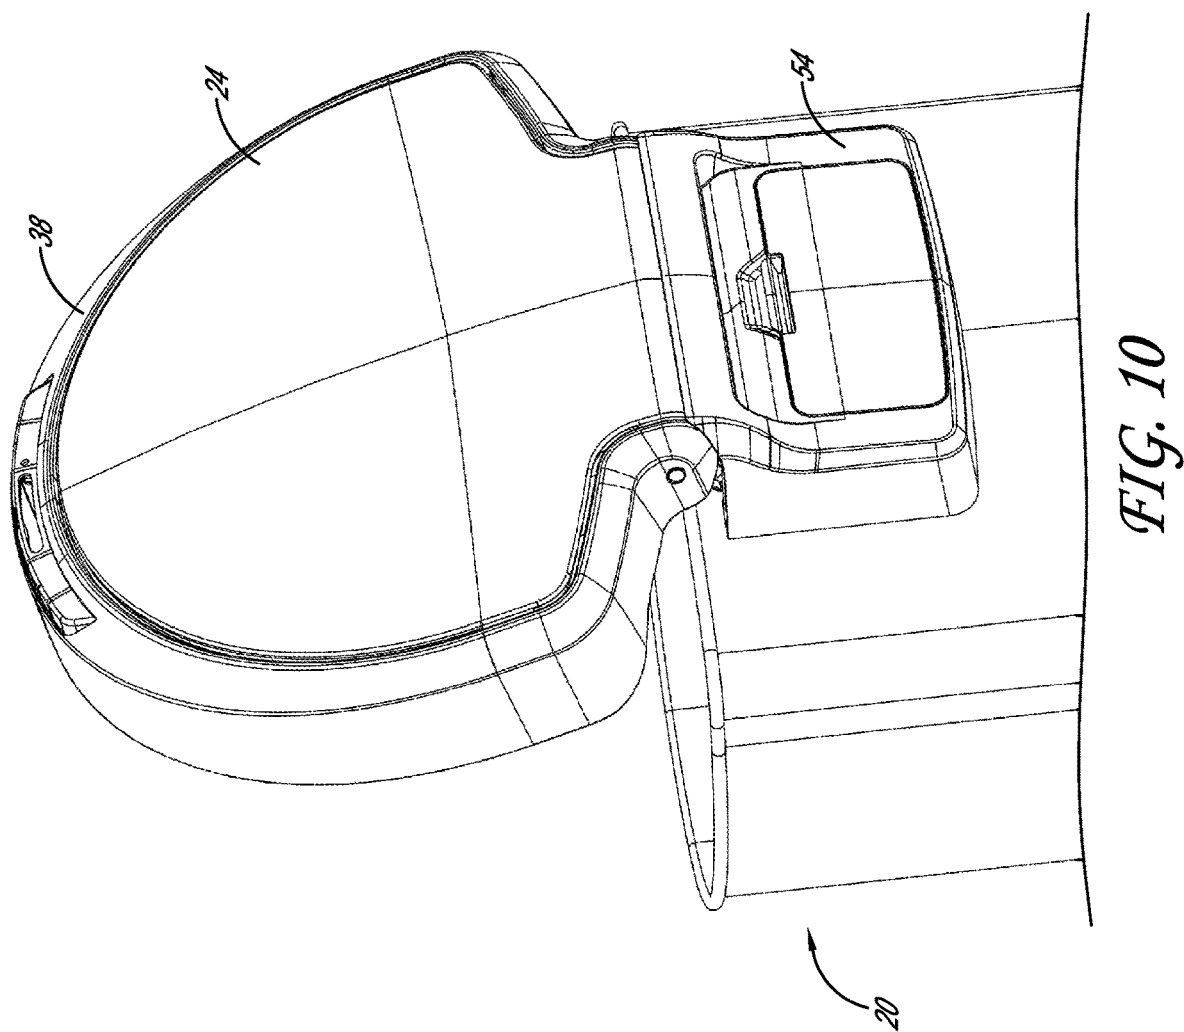


FIG. 9



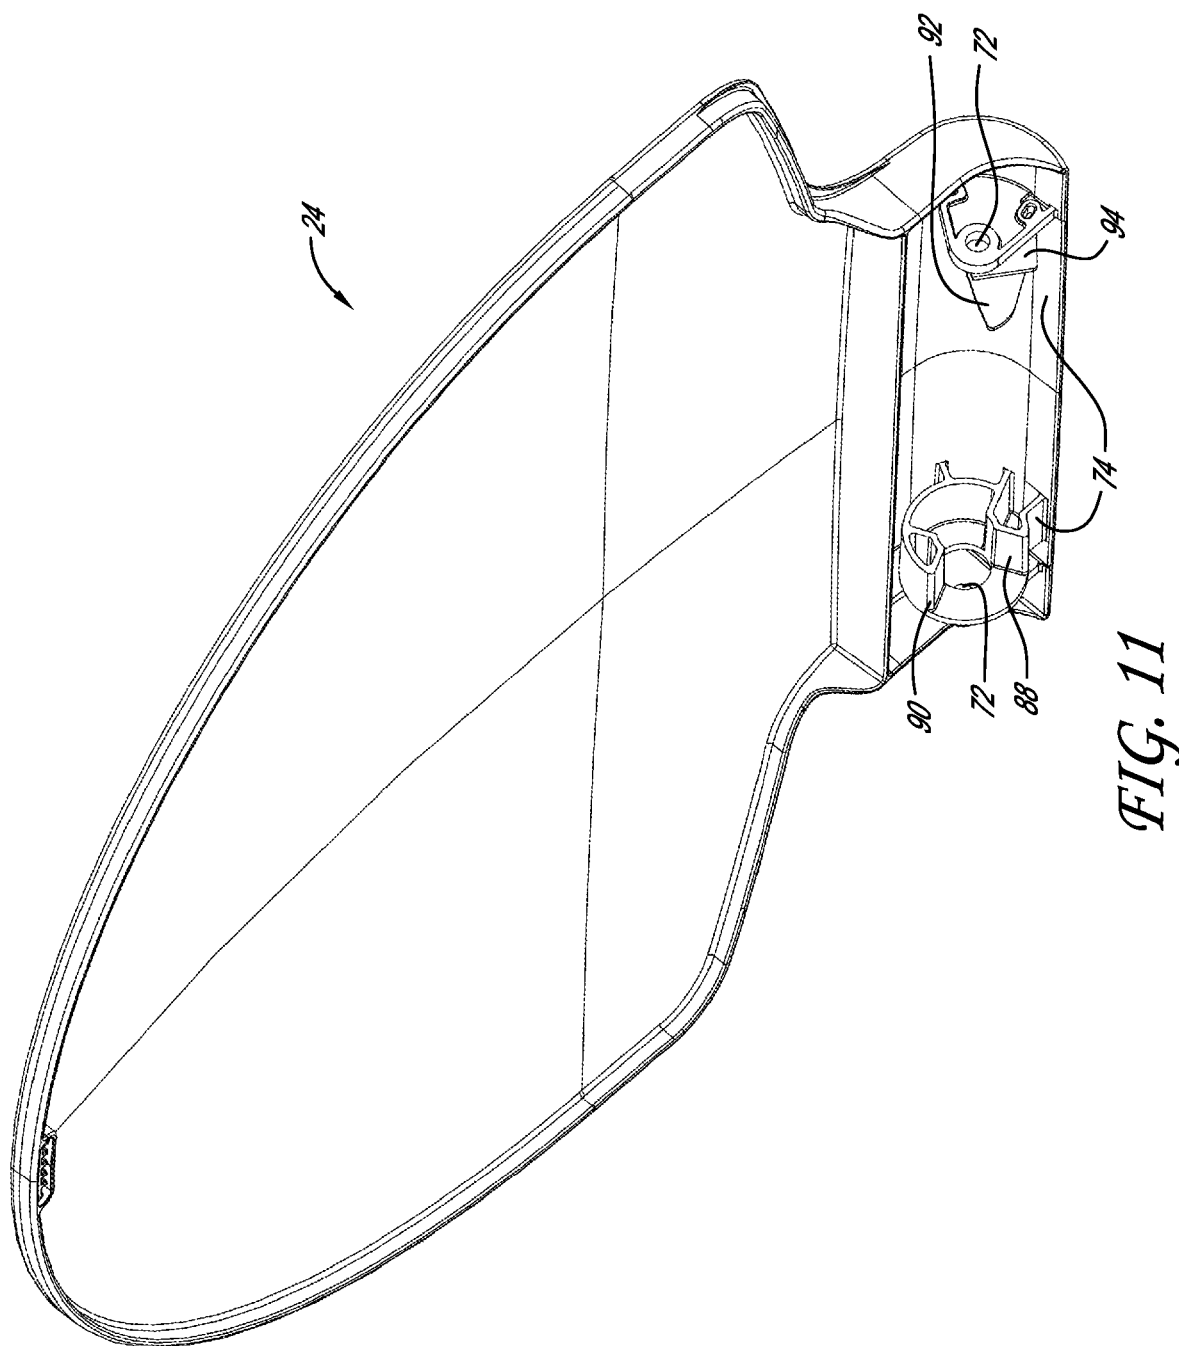


FIG. 11

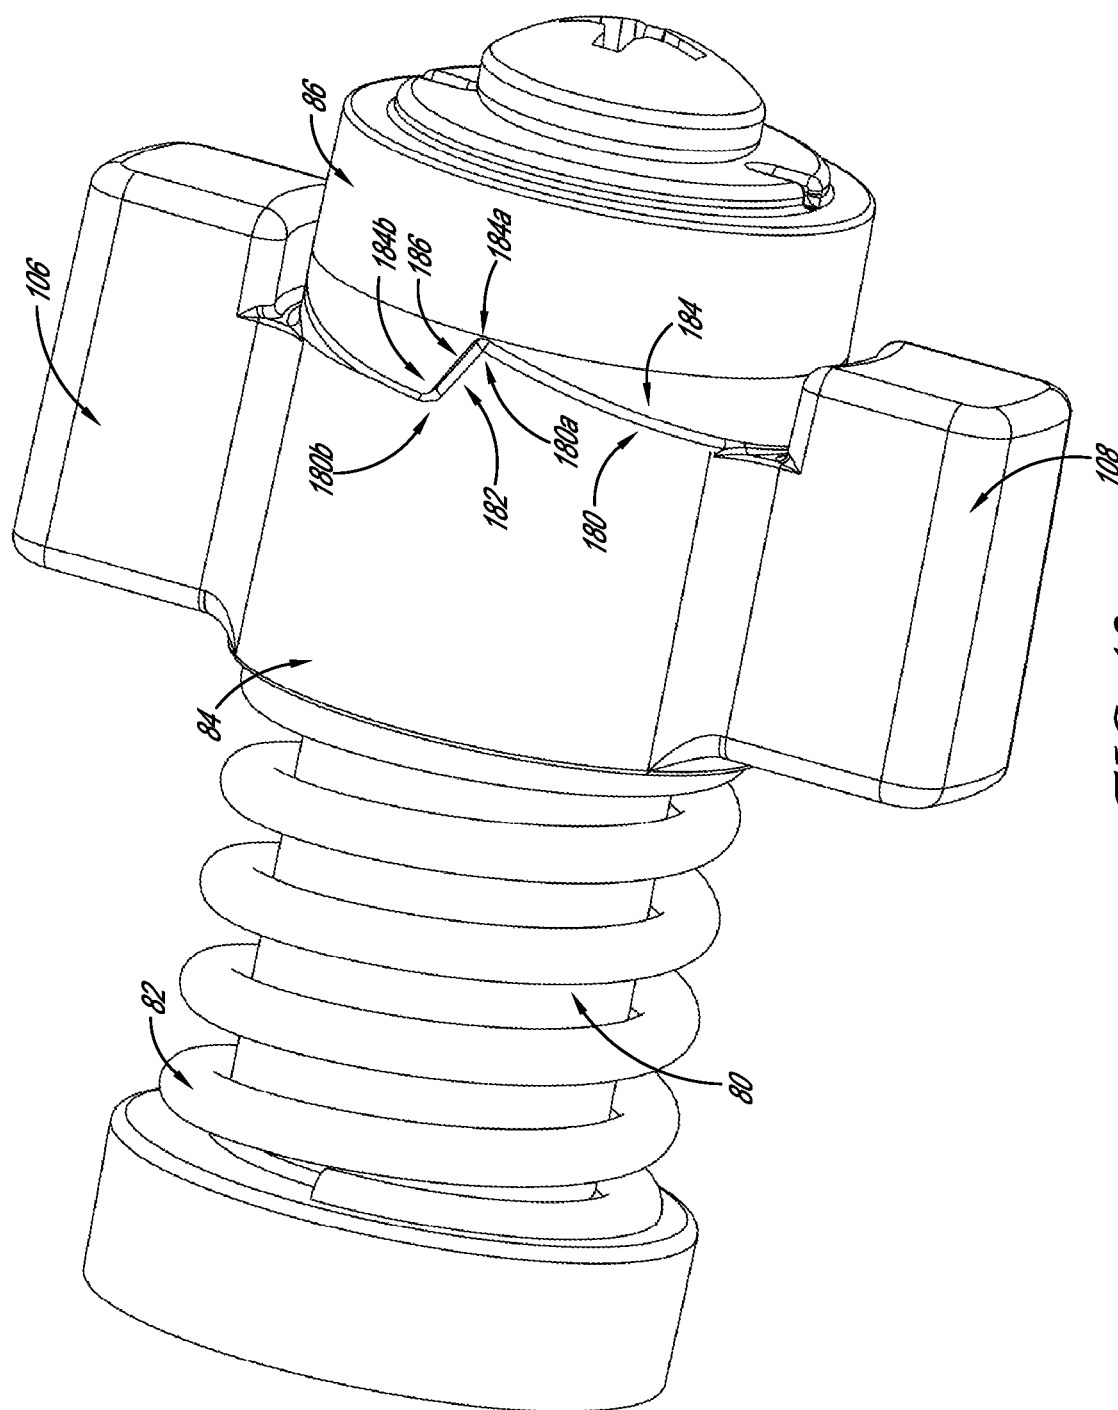


FIG. 12

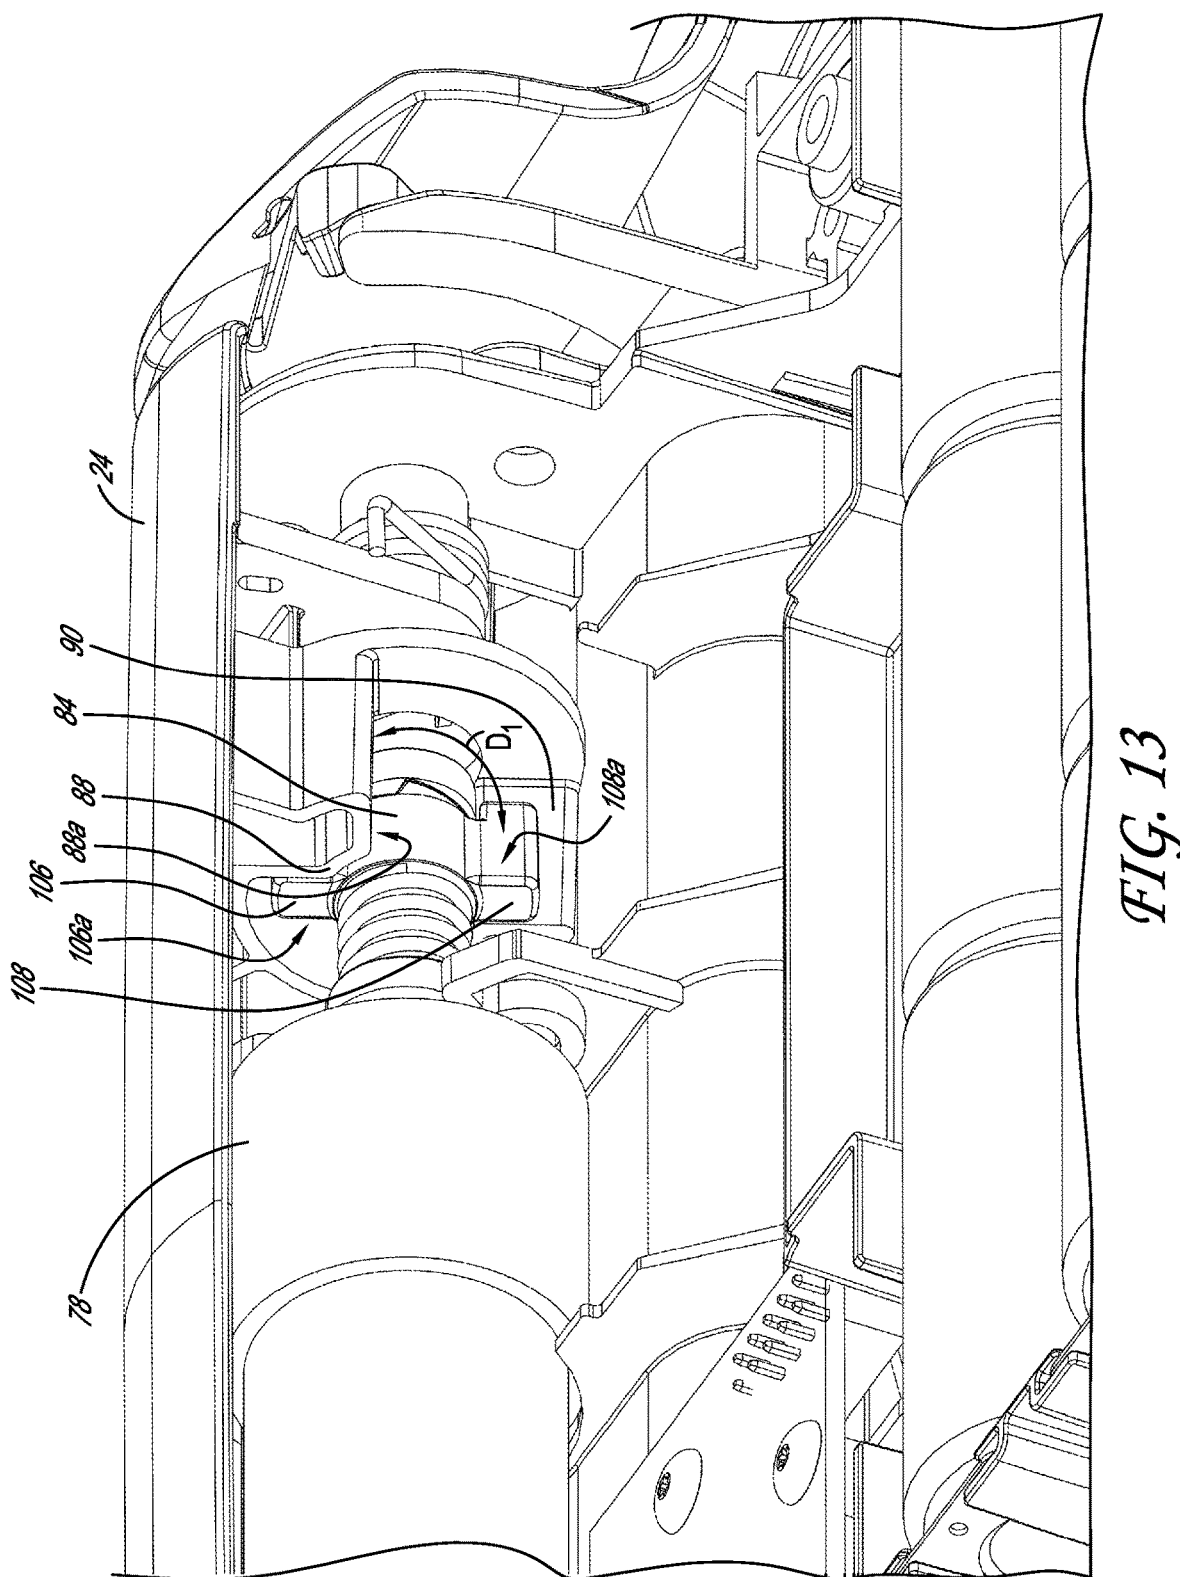


FIG. 13

1

TRASH CAN ASSEMBLY

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 13/787,638, filed Mar. 6, 2013, which claims the priority benefit under 35 U.S.C. § 119(e) of U.S. Provisional Patent Application No. 61/609,233, filed Mar. 9, 2012. The entirety of each of the aforementioned applications is incorporated herein by reference.

BACKGROUND

Field

Some embodiments relate to power transfer devices, such as mechanisms for operating lids or doors for receptacles.

Description of the Related Art

Receptacles and other devices with mechanisms for transferring power to a subcomponent, such as a lid or a door, are used in a variety of different settings. For example, in both residential and commercial settings, trash cans and other devices often have lids for protecting or preventing the escape of the contents of the receptacle. Some trash cans include lids or doors to prevent odors from escaping and to hide the trash within the receptacle from view. Additionally, the lid of a trash can help prevent contamination from escaping from the receptacle.

Some commercially available trash cans have powered or manually operated lids. Such cans generally include a motor that drives a gear assembly, which in turn drives the lid open and closed. Such trash cans can include a sensor positioned on or near the lid. Such a sensor can be configured to detect movement, such as a user's hand being waived near the sensor, as a signal for opening the lid. When such a sensor is activated, a motor within the trash receptacle opens the lid or door and thus allows a user to place items into the receptacle. Afterwards, the lid can be automatically closed.

However, certain conventional power or manually operated lids present some difficulties. For example, users of current trash cans with power operated lids can experience problems if the trash within the receptacle or can is piled higher than the level of the lid itself. If the trash or other material within the can is higher than the level of the lid itself, the lid will be unable to completely close. This can cause the motor or batteries to wear down, continue running, and/or ultimately fail. It can also force the user to reset the controller, remove trash, or manually compress the trash until the lid can be closed.

A number of other problems are associated with the deployment, use, and removal of receptacle liners, such as trash bags. A common problem is associated with maintaining the trash bag suspended at the top of the trash open with the mouth of the trash bag opened. For example, a user typically needs to fold the top edge of the trash bag over the top edge of the trash can or its internal liner to maintain the mouth of the trash bag opened at the top of the trash can or an internal liner. However, the weight of the waste materials deposited into the trash bag may cause the trash bag to slip from the mouth of the trash can and fall into the interior of the trash can. This can result in the undesirable spillage of the waste material inside the trash bag and/or the inconvenience of having to reach into the interior of the trash can to retrieve and reposition the bag onto the trash can.

2

Further, problems can exist when a user manually opens and closes the lid or door of a trash receptacle configured to transfer power to the lid or door. Whether intentional or accidental, the act of directly manually opening or closing the lid (e.g., not opened and/or closed by the motor or another power transmission device, such as a foot pedal) may, for example, wear down, strip or lead to the failure of the components and parts of the power operated trash receptacle, such as the motor or gears. For instance, when the lid is manually operated, certain of the gears in connection with the lid are encouraged to move (e.g., rotate and/or translate). However, because the motor may be relatively difficult to rotate when not being operated, the motor may inhibit one or more of the gears from moving. Thus, when the lid is manually operated, a stress can result between the gears that the lid is urging to move and the gears that the motor is inhibiting from moving. Such a stress can result in damage to the gears, motor, lid, or other components of the receptacle. For instance, such stress can strip one or more teeth of the gears. Damage to the gears can, for example, result in reduced control over the motion of the lid, cause noise, and even inhibit or prevent the motor from operating the lid.

SUMMARY

Various embodiments of a trash can assembly (e.g., a receptacle configured to receive refuse, recyclable materials, or otherwise), and related methods, are provided. In some embodiments, the trash can assembly includes a body component, such as a shell or housing. In some embodiments, the body component is made of a metal, such as stainless steel. The body component can be configured to receive a portion of a removable liner, such as a trash bag, bin bag, bin liner, or otherwise.

Various embodiments of the trash can assembly include a trim member, such as a plastic or metal edge, border region, or otherwise. The trim member can be pivotally coupled (e.g., rotatably, hingedly, or otherwise) with the body. The trim member can be configured to move between a closed position and an open position. When the trim member is in the closed position and an upper portion (e.g., edge, ridge, rim, or otherwise) of the removable liner is positioned over an upper edge (e.g., lip, rim, or otherwise) of the body component, the trim member can be configured to engage the upper edge of the body component to secure (e.g., pinch, grasp, or otherwise) the upper portion of the removable liner between the trim member and the upper edge of the body component.

In some embodiments, the trash can assembly includes a lid, such as a cover, top, closure member, or otherwise. The lid can be pivotally coupled with the body component and configured to move between a first position (e.g., closed or shut) and a second position (e.g., open). In some implementations, a periphery (e.g., an edge and/or radially outer portion) of the lid can be generally received in the trim when the trim is in the closed position and the lid is in the first position, the periphery of the lid being positioned generally outside of the trim when the trim is in the closed position and the lid is in the second position. In some embodiments, the lid is made of the same material as the body. In some embodiments, the lid is made of the same material as the trim member.

In some embodiments, the trim member includes a wall extending generally downwardly (e.g., generally transverse direction to a top surface of the trim member, generally toward a base of the trash can assembly, or otherwise) from

a top surface of the trim member. In certain variants, the trim member includes a liner retention feature (e.g., one or more hooks, wings, detents, snaps, magnets, or otherwise) positioned on an inside surface of the wall. In some embodiments, the liner retention feature includes an inwardly (e.g., radially inwardly, in a direction generally toward the body, or otherwise) extending flap positioned on an inner surface of the wall. The inwardly extending flap can be configured to receive a portion of the upper edge of the body component. For example, in some embodiments, the upper edge of the body component includes an annular lip and the inwardly extending flap includes an engagement element (e.g., recess, aperture, channel, protrusion, or otherwise) configured to secure a portion of the removable liner between the flap and the annular lip.

In some embodiments, the trim member includes a retaining mechanism, such as a latch, detent, or other securing and/or holding device. The retaining mechanism can be configured to maintain the trim member in the open position, thereby allowing a user to mount the removable liner in the trash can assembly. In some embodiments, the retaining mechanism includes a first cam structure (e.g., arm, wheel, shaft, cylinder, gear, etc.) and a second cam structure. The first cam structure can be configured to be received in a holding feature (e.g., a recess, channel, or otherwise) of the second cam structure as the trim member moves (e.g., rotates, slides, translates, or otherwise) toward the open position.

In some embodiments, the trash can assembly includes a power operated driving mechanism, such as a motor and shaft. The power operated driving mechanism can be configured (e.g., with a linkage or gearing) to move the lid between the first and second positions. In some implementations, the power operated driving mechanism is activated by a sensor, such as an infrared sensor, proximity sensor, ultrasonic sensor, or otherwise. For example, a signal from the sensor can be provided to a controller, which can be configured to regulate the operation of the power operated driving mechanism to move the lid between the first and second positions based on the signal. In certain variants, the sensor is configured to sense (e.g., detect, monitor, measure, or otherwise) the presence and/or lack thereof of an object or user in a vicinity of the trash can assembly. For example, the sensor can sense the presence of a user generally in front and/or above the trash can assembly, and thus signal for the lid to be opened. Some implementations of the sensor are configured to sense the presence and/or lack thereof of an object or user in a volume of space relative to the trash can assembly, such as within a generally conical volume of space above the trash can assembly. In some embodiments, at least one of the power operated driving mechanism and the sensor is deactivated (e.g., generally depowered, turned off, or otherwise) when the trim member is in the open position. Certain such implementations can, for example, reduce the likelihood of false positive readings and/or can conserve energy.

In accordance with some implementations, a trash can assembly includes a body component. The trash can assembly can have a lid mounted relative to the body component. The lid can be configured to move between open and closed positions. In some variants, the lid has a lid driving mechanism. Certain embodiments of the trash can assembly include a power operated driving mechanism that includes a motor coupled (e.g., directly or indirectly) with a shaft. In various embodiments, the motor is powered (e.g., by alternating current, direct current, or otherwise). In some implementations, the motor is configured to receive electrical

power from one or more batteries. In some implementations, solar panels provide power to at least some components of the trash can, such as the motor.

Certain implementations of the trash can assembly include a clutch mechanism, such as a selectively engageable power and/or torque transfer member. In some variants, the clutch mechanism can be engageable with (e.g., abutted against, securable with, connectable to, or otherwise) the lid driving mechanism. The clutch mechanism can be configured to receive torque from the motor, such as via the shaft, and to transmit the torque to the lid driving mechanism to move the lid between the open and closed positions. The lid driving mechanism and the clutch member can be configured to allow a user to manually move (e.g., push, pull, rotate, translate, lift, etc.) the lid between the open and closed positions substantially without applying a force (e.g., torque) to at least one of: the motor, the shaft, and the clutch mechanism. In some embodiments, the lid driving mechanism and the clutch member can be configured to allow a user to manually move the lid between the open and closed positions substantially without applying a force (e.g., torque) to at least two of: the motor, the shaft, and the clutch mechanism (e.g., the motor and the shaft, the shaft and the clutch, and/or the motor and the clutch). In certain implementations, the lid driving mechanism and the clutch member can be configured to allow a user to manually move the lid between the open and closed positions substantially without applying a force (e.g., torque) to the motor, the shaft, and the clutch mechanism.

In some embodiments, the lid driving mechanism is attached to a bottom surface of the lid, such as an underside, back, and/or surface generally directed toward the base of the trash can assembly. The lid driving mechanism can be configured to directly or indirectly abut (e.g., contact, touch, or otherwise) with the clutch mechanism. In some embodiments, when the clutch mechanism is operated (e.g., rotated by the shaft and/or the motor), such abutment can result in the lid driving mechanism being moved (e.g., rotated), thereby moving the lid between the open and closed positions.

According to some implementations, the lid driving mechanism includes first and second flanges, such as flaps, wings, protrusions, or otherwise. The flanges can be configured to abut with first and second torque transmission members (e.g., arms, shafts, etc.) of the clutch mechanism, respectively. In certain variants, at least one of the first and second flanges extend radially inwardly (e.g., generally toward the body, generally toward a radial center of the trash can assembly, or otherwise). According to certain variants, rotation of the clutch mechanism results in rotation of the first and second flanges, which in turn results in movement (e.g., rotation) of the lid between the open and closed positions. In some embodiments, the first and second flanges are positioned on the lid. For example, the first and second flanges can be molded or otherwise formed with the lid, or joined (e.g., by welding or adhesive) with the lid.

Some implementations include at least one circumferential space (e.g., a gap or recess) between the first and second flanges. In certain embodiments, at least one of the first and second torque transmission members is configured to be positioned within the at least one circumferential space. Certain embodiments include first and second circumferential spaces between the first and second flanges, with the first torque transmission member being positioned in the first circumferential space and the second torque transmission member being positioned in the second circumferential space.

In some embodiments, the first and second torque transmission members have at least one arm extending from a central body of the clutch mechanism. For example, some embodiments include first and second arms extending radially outward from the central body. In some variants, at least one of the arms has a first surface and second surface. The first surface can be configured to abut with the first flange and the second surface can be configured to abut with the second flange. In certain implementations, when the first surface is abutted with the first flange, a first circumferential distance is defined between the second surface (e.g., non-abutted surface) and the second flange. In some embodiments, the first circumferential distance is greater than or equal to the amount of rotation of the lid between the closed and open positions. For example, in certain variants, the rotation of the lid between the closed and open positions can be at least about 80° and the circumferential distance can be greater than or equal to about 80°. In some embodiments, the circumferential distance being greater than or equal to the amount of rotation of the lid between the closed and open positions facilitates a user being able to manually (e.g., without operating the driving mechanism, etc.) open and/or close the lid without applying a force to the arms.

In some embodiments, the trash can assembly includes one or more lid position sensing elements, such as flagging members, proximity sensors, interrupt-type sensors, potentiometers, or otherwise. In certain implementations, the lid position sensing elements are communicatively (e.g., electrically connected, etc.) connected with a controller, such as a processor or other electrical circuit configured to execute one or more algorithms. The controller can be configured to determine whether the lid is in the open or closed position, such as based on a signal from the lid position sensing elements.

In accordance with some embodiments, a trash can assembly includes a body component and a lid that is mounted relative to the body component and is configured to move between open and closed positions. The trash can assembly can include a driving mechanism operable to move the lid between the open and closed positions. Some embodiments of the driving mechanism can include a motor, a shaft, and an end member. The motor can be configured to rotate the shaft, and the shaft can be configured to rotate the end member. In some embodiments, the end member is generally rigidly coupled (e.g., fixed or secured) with the shaft such that the end member is generally prevented from rotating relative to the shaft.

In some variants, the driving mechanism includes a clutch mechanism. The clutch mechanism can be rotatably engageable (e.g., able to be engaged and disengaged) with the lid. The driving mechanism can be adapted to receive torque from the end member, so as to move the lid between the open and closed positions. The clutch mechanism can be configured to move (e.g., rotate, translate, slide, etc.) relative to the end member when the lid is moved between the opened and closed positions generally without operation of the driving mechanism (e.g., generally without rotational movement of the motor and/or the shaft relative to the body).

In some embodiments the driving mechanism includes a biasing member, such as a spring, elastic member or otherwise. The biasing member can be configured to bias (e.g., to apply a force to) the clutch mechanism into engagement (e.g., contact, abutment, securement, or otherwise) with the end member. In certain implementations, the bias of the biasing member can facilitate torque from the motor being transmitted to the clutch mechanism via the engagement between the end member and the clutch mechanism.

In some embodiments, the clutch mechanism is configured to move (e.g., translate and/or rotate) relative to the end member and/or the shaft. For example, in some embodiments, the clutch mechanism can move relative to the end member and/or the shaft when the lid is moved between the opened and closed positions generally without operation of the driving mechanism, such as when the lid is opened or closed manually (e.g., by hand). In some embodiments, when the clutch mechanism moves relative to the end member and/or the shaft, the clutch mechanism translates toward the motor along a portion of a longitudinal length of the shaft and/or rotates relative to the end member. In some embodiments, when movement of the clutch mechanism relative to the end member and/or the shaft ceases, the biasing member is configured to move (e.g., to translate and/or rotate) the clutch mechanism towards and/or into engagement with the end member.

In some embodiments, the clutch mechanism and the end member include corresponding cam surfaces. In certain implementations, the corresponding cam surfaces are configured to allow the clutch mechanism to translate and rotate relative to the end member. In some embodiments, the clutch mechanism includes a first inclined cam surface and the end member includes a second inclined cam surface. The first and second inclined cam surfaces can be configured to allow mating engagement between the clutch mechanism and the end member. In some embodiments, when the lid is moved between the opened and closed positions generally without operation of the driving mechanism, the first and second inclined cam surfaces slide (e.g., translate and/or rotate) relative to each other.

BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other features of the trash cans disclosed herein are described below with reference to the drawings of certain embodiments. The illustrated embodiments are intended to illustrate, but not to limit the disclosure. The drawings contain the following Figures:

FIG. 1 is a top, front, and left side perspective view of an embodiment of an enclosed receptacle, with a lid and a trim member in a closed position.

FIG. 2 is an enlarged top, front, and left side perspective view of the receptacle illustrated in FIG. 1, with the lid in an open position and the trim member is the closed position.

FIG. 3 is a top, rear, and right side perspective view of the receptacle shown in FIG. 1.

FIG. 4 is an exploded top, front, and left side perspective view of an embodiment of an enclosed receptacle with the lid closed.

FIG. 5 is an enlarged rear perspective view of the receptacle shown in FIG. 1, with a back cover removed.

FIG. 6 is an enlarged top, rear, and left side perspective view of the receptacle illustrated in FIG. 1, with the lid and trim member removed to show a lifting mechanism.

FIG. 7 is an enlarged bottom view of a portion of the trim member of FIG. 1.

FIG. 8 is an enlarged partial cross sectional view of the receptacle of FIG. 1.

FIG. 9 is an enlarged partial rear perspective view of the receptacle illustrated in FIG. 1, with the back cover removed.

FIG. 10 is an enlarged top, rear, and left side perspective view of the receptacle illustrated in FIG. 1, with the lid and trim member in the open position.

FIG. 11 is an enlarged front, bottom, and left side perspective view of the lid of FIG. 1.

FIG. 12 is an enlarged perspective view of the motor and gear drive mechanism of the lifting mechanism illustrated in FIG. 6.

FIG. 13 is an enlarged partial rear perspective view of the receptacle illustrated in FIG. 1, with the back cover removed.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

The various embodiments of a system for transmitting power for opening and closing a lid or door of a receptacle, such as a trash can, or other device is disclosed in the context of a trash can. The present disclosure describes certain embodiments in the context of a trash can due to particular utility in this context. However, the subject matter of the present disclosure can be used in many other contexts as well, including, for example, commercial trash cans, doors, windows, security gates, and other larger doors or lids, as well as doors or lids for smaller devices such as high precision scales, computer drives, etc. The embodiments and/or components thereof can be implemented in powered or manually operated systems.

With reference to FIGS. 1-3, a trash can assembly 20 can include a body or shell component 22 and lid 24 and other modular pieces or components. The trash can assembly 20 is generally easy to assemble and maintain. It can have minimal parts and have a compact design. Lid 24 can include door components, such as an air filter (not shown). The trash can assembly 20 can be configured to rest on a floor, and can be of varying heights and widths depending on, among other things, consumer need, cost, and ease of manufacture. Additional details and examples of trash can assemblies that can be used with, or instead of, components discussed herein are provided in U.S. Patent Application Publication No. 2011/0220647, filed Mar. 4, 2011, and U.S. Patent Application Publication No. 2009/0194532, filed Feb. 1, 2008, the entirety of each of which is incorporated herein by reference.

The trash can assembly 20 can include the body component 22. In some embodiments, the trash can assembly can be configured to receive a liner or trash bag (not shown), which can be retained at least partly within the body component 22. For example, an upper peripheral edge of the body component 22 can be configured to support an upper peripheral edge of the liner such that the liner is suspended and/or restrained by its upper peripheral edge within the body component 22. In some embodiments, the trash can assembly 20 can include a liner support member (not shown) supported by the body component 22 and configured to support the liner at least partly within the interior of the body component 22. In some embodiments, the body component 22 is configured such that the liner can be seated on a lower portion of the body component 22.

With reference to FIG. 4, in some embodiments, the body component 22 includes an upper edge 26. As illustrated, the upper edge 26 of the body component 22 can be rolled, include an annular lip, or otherwise include features that extend outwardly from a generally vertical wall of the body component 22. In some embodiments, the upper edge 26 has a generally rounded cross-section. Other designs can also be used.

The body component 22 can assume many configurations. The non-limiting embodiments of FIGS. 1-3 illustrate the body component 22 having a generally semi-circular configuration with a rear wall 28 and a curved, front wall 30. However, other configurations can also be used, for example, rectangular. The liner or trash bag (not shown) can

have the same general configuration, or a different configuration from the body component 22. The body component 22 can be made from plastic, steel, stainless steel, aluminum or any other material.

As illustrated in FIG. 4, the trash can assembly 20 can include a base portion 44. The base portion 44 can have a generally annular and curved skirt upper portion and a generally flat lower portion for resting on a surface, such as a kitchen floor. The base portion 44 of the trash can assembly 20 can be made integrally, monolithically, or separate from the body component 22. In some implementations, the base portion 44 comprises plastic, metal (e.g., steel, stainless steel, aluminum, etc.) or any other material. In some embodiments, such as those in which the body component 22 is metal (e.g., stainless steel), the base portion 44 can be a plastic material. In some embodiments, the base portion 44 includes projections 40 that are open or vented to the ambient environment (e.g., thorough the generally flat lower portion of the base portion 44), as will be discussed in further detail below. As illustrated, certain embodiments of the base portion 44 include a generally centrally located passage thorough the generally flat lower portion of the base portion 44.

In some embodiments, the base portion 44 can be connected with or attached to the body component 22 by connection components 46, such as hooks and/or fasteners (e.g., screws). For example, in some embodiments, the base portion 44 includes hooked tabs that are configured to connect with a lower edge (e.g., a rolled edge) of the body component 22. In some embodiments, the hooked tabs engage the lower edge of the body component 22, such as by a snap-fit connection. In some embodiments, the base portion 44 and the body component 22 are joined with adhesive, welding, hooks and similar attachment mechanisms.

In some embodiments, a liner insert 100 is connected with, or attached to, the base portion 44. In some embodiments, the liner insert 100 can have support members, such as legs 48, which can support and/or elevate the liner insert 100 above an interior bottom of the base portion 44. In some embodiments, the legs 48 are joined with the base portion 44 (e.g., with fasteners, welding, etc.).

In some embodiments, the liner insert 100 is configured to generally support and/or cradle a lower portion of a trash bag disposed in the trash can assembly 20. For example, as illustrated, the liner insert 100 can be generally concave or bowl-shaped. In some embodiments, the liner insert 100 is configured to protect a trash bag from rupture or damage and retain spills. For instance, the liner insert 100 can have a generally smooth surface to reduce the likelihood of the trash bag being torn or punctured by contact with the liner insert 100. Several embodiments of the liner insert 100 thus can reduce the chance of damage to the trash bag even in embodiments of the trash can assembly 20 that do not utilize a generally rigid liner that extends along some or all of the height of the body component 22.

In certain implementations, the liner insert 100 forms a seal (e.g., generally liquid resistant) with a lower portion of the body component 22. In some embodiments, the liner insert 100 can include openings 42 that are configured to correspond to, or mate with, the projections 40 located on the interior bottom surface of the base portion 44, thereby placing the openings 42 and the projections 40 in fluid communication. By aligning the openings 42 of the liner insert 100 and the projections 40 of the base portion 44, the openings 42 can allow ambient air to pass into and out of the interior of the trash can assembly, which can inhibit or prevent the occurrence of a negative pressure region (e.g., in

comparison to ambient) inside the trash can assembly 20 when a user removes a trash bag from the trash can assembly 20. Further, in certain variants, when a user inserts refuse or other materials into the trash bag in the trash can assembly 20, air within the trash can assembly 20 can exit via the openings 42 and the projections 40, thereby inhibiting the occurrence of a positive pressure region (e.g., in comparison to ambient) inside the trash can assembly 20 and allowing the trash bag to freely expand.

As described above, the trash can assembly 20 can include the rear wall 28. Along the rear wall 28, the trash can 20 can include a back cover 54. The back cover 54 can enclose and/or protect a back side enclosure 56, as illustrated in FIG. 5. In some embodiments, the back side enclosure 56 can house the power source 66 for the trash can 20. For example, in some embodiments, the back side enclosure 56 can be configured to receive and retain at least one battery. The back side enclosure 56 can have a generally low profile configuration. For example, the back side enclosure 56 can extend rearwardly from the rear wall 28 a distance of less than or equal to about 1 inch, or less than or equal to about 1/5th of the distance between the outside surfaces of the rear wall 28 and the front-most portion of the front wall 30.

With reference to FIG. 6, in some embodiments, a housing 64 for a power operated driving mechanism 58 can be positioned on or near the rear wall 28, such as above or on top of the back side enclosure 56. In the illustrated embodiment, the housing 64 is a generally cylindrical structure or shell. In other embodiments, the housing 64 can be of other various designs and shapes. In some embodiments, the shape and location of the housing 64, the compactness of the driving mechanism 58 within the housing 64, and/or the generally low-profile of the back side enclosure 56 can allow the trash can assembly 20 to be positioned flush or substantially flush with a wall (not shown) or other generally flat vertical structure of a building or home. Thus, the trash can assembly 20 can have a smaller footprint and/or take up less floor space. In some embodiments, the back side enclosure 56 and/or the driving mechanism housing 64 extend rearwardly from the rear wall 28 less than or equal to about 1.5 inches.

Certain embodiments of the trash can assembly 20 include a trim member 38. As illustrated in FIG. 4, in some embodiments, the trim member 38 is connected with the back side enclosure 56 and/or body components, such as by fasteners 29 (e.g., screws). Some embodiments of the trim member 38 are configured to rotate with respect to the body component 22 and/or the lid 24. The trim member 38 can be made of various materials, such as plastic or metal. The trim member 38 and the body component 22 can be made from the same or different materials. For example, the trim member 38 and the body component 22 can comprise a plastic material. Some embodiments of the trim member 38 can engage and/or overlap the upper edge 26 of the trash can assembly 20.

As illustrated in FIG. 7, which shows a bottom portion of the trim member 38, certain embodiments of the trim member 38 are configured to support and/or mask electrical components, such as a sensor assembly 102 and/or wire 112 that connects the sensor assembly 102 to the power source 66 or a controller. One or several guide members 114 can be positioned underneath a top surface of the trim member 38 to generally inhibit movement of the wire 112 within the trim member 38, thereby generally hiding the wire from view and reducing the chance of rubbing or other damage to the wire 112.

With reference to FIGS. 7-8, in some embodiments, the trim member 38 is configured to secure or retain an upper portion of the trash bag between the trim member 38 and the upper edge 26 of the body component 22. The trim member 38 can include a wall 116 that extends generally downwardly (e.g., in a generally transverse direction to the top surface of the trim member 38). In certain configurations of the trim member 38, the wall 116 extends downwardly beyond the upper edge 26 and along the body component 22. In some embodiments, bag retention features, such as radially inwardly extending flaps 118, are positioned on the inside of the wall 116. The flaps 118 can include an edge engagement element, such as a recess 119. In some embodiments, the recess 119 is positioned at one end of the flap 118 and/or near the top surface of the trim member 38. The flaps 118 can be configured to receive, nest with, and/or removably lock onto the upper edge 26, such as by a friction fit. In some embodiments, when a trash bag is placed in the body component 22 and the upper portion of the trash bag is positioned over the rolled edge or annular lip of the upper edge 26, the trim member 38 can be positioned (e.g., rotated into position) such that the trash bag is disposed between the trim member 38 and the body component 22. Further, the flaps 118 can be configured to receive the rolled edge or annular lip of the upper edge 26, thereby generally securing a portion of the trash bag between the flaps 118 and the upper edge 26 and inhibiting the trash bag from falling into the body component 22.

In some embodiments as illustrated in FIGS. 9-10, the trim member 38 can be positioned and/or maintained in an open position (e.g., against the force of gravity and/or without requiring a person to hold or otherwise keep the trim member 38 in the open position). The open position can, for example, allow a user to mount a trash bag in the trash can assembly 20 and/or do extended chores, such as cleaning the inside of the trash can assembly 20. As illustrated, in some embodiments, the trim member 38 rotates with respect to the body component to reach the open position. In some embodiments, the trim member 38 includes a retaining mechanism. For example, as shown in FIG. 9, the trim member 38 can include a first cam structure 120, such as a tooth, which can be located at the rear of the trim member 38 and on an adjacent side of the housing 64. The first cam structure 120 can be configured to engage a second cam structure, such as a ramp 122. In some embodiments, the second cam structure includes a recess 124 that is configured to receive some or all of the first cam structure 120. The recess 124 can be located at or near an end of the ramp 122 and may be positioned near the rear of the trash can assembly 20. In some embodiments, as the trim member 38 rotates (e.g., toward the open position), the first cam structures 120 rotate (e.g., clockwise) into abutment with the ramp 122. The first cam structure 120 can engage (e.g., slide and/or ride up) the ramp 122 and into the recess 124, which can retain the first cam structure. Thus, the trim member 38 can remain in the open position while the user switches bags or completes one or more chores. When such tasks are complete, the trim member 38 can be rotated in the generally opposite direction (e.g., counter-clockwise) to a closed position, in which the flaps 118 can be engaged with the upper edge 26 of the body component, as discussed above.

The lid 24 and trim member 38 can be pivotally attached to the trash can assembly 20 by any manner. In the illustrated embodiments, the lid 24 and trim member 38 are pivotally coupled to the trash can assembly 20 generally along the same pivot axis. The pivotal connection can be any type of connection allowing for pivotal movement, such as, hinge

11

elements, pins, or rods. For example, with reference to FIGS. 6 and 9, first pivot features, such as pins 50, 52, extend laterally through the housing 64 of the driving mechanism 28 that opens and closes the lid 24, and can be adapted to be received in corresponding second pivot features, such as through-holes 36, provided at the rear of the trim member 38. The pins 50, 52 can extend through the through-holes 36 to pivotably connect the trim member 38 to the housing 64 of the trash can assembly 20 along a pivot axis. With reference to FIG. 2, in some embodiments, a portion of or the entire lid 24 can be positioned, located, or received in a recess 68 in the interior of the trim member 38. In some embodiments, a damper 110 (e.g., foam, springs, rubber pads, or any other generally pliable, resilient, and/or damping structure) can be positioned between the lid 24 and trim member 38, such as to provide noise reduction when the lid 24 closes onto the trim 38.

In some embodiments, a rear portion of lid 24 can be pivotably coupled to the trash can assembly 20 along the same pivot axis as the trim member 38. For example, the rear portion of lid 24 can be pivotably coupled to the trash can assembly 20 along the same pivot axis as the trim member 38 via the pins 50, 52, which can also connect the trim member 38 to the driving mechanism housing 64 of the trash can assembly 20.

In some embodiments, the pins 50, 52 can extend through the trim member 38 and the housing 64 and are adapted to be received in corresponding through-holes 72 of additional structures secured to the inside of the rear of the lid 24 located adjacent to the driving mechanism components 74. In some embodiments, the pins 50, 52 can pivotably couple the lid 24 and trim member 38 to the trash can assembly 20 along the same pivot axis. In some embodiments, as illustrated in FIG. 5, bias members 126, such as one or more torsion springs, can be positioned on the pins 50, 52. The biasing members 126 can provide a biasing force to assist in opening and/or closing the lid 24, which can reduce the amount of power consumed by the motor 78 when moving the lid 24 between the open and closed positions and/or can allow for the use a smaller motor (e.g., in dimensional size and/or in power output).

With reference to FIG. 11, the lid can include lid driving mechanism components 74. In certain variants, the lid driving mechanism components 74 are configured to abut, mate, contact, receive and/or be received in the drive mechanism 58 in the housing 64 to facilitate opening and closing the lid 24. In some variants, the lid driving mechanism components 74 include a generally C-shaped portion. In certain implementations, the lid driving mechanism components 74 can include rotation support members, such as flanges 88, 90, and lid position sensing elements, such as flagging members 92, 94. As illustrated, the flanges 88, 90 and/or the flagging members 92, 94 can extend radially inwardly and can be attached at or near the rear underside of the lid 24. As described in further detail below, the controller 70 can communicate with a sensing system to determine various functions and parameters of the trash can assembly, such as when to drive the motor 78 so as to open or close the lid 24. As illustrated, in some embodiments, a portion of or the entire lid driving mechanism components 74 can be secured to the inside of the rear of the lid 24.

With reference to FIGS. 5-6 and 11-12, the driving mechanism 58 can include a controller or circuit board 70. In some embodiments, the driving mechanism components in the housing 64 can include a drive motor 78 and shaft or axle 80. Some embodiments include a bias member, such as a spring 82. Certain embodiments include a clutch mecha-

12

nism 84 and/or a torque transmission member, such as an end member 86. At least some of the driving mechanism components can be removable from the other components. For example, the drive motor 78, or other component, can be removable such so as to facilitate repair, replacement, etc.

With reference to FIG. 9, the driving mechanism 58 can include a first position sensor 96 (e.g., a closed position sensor) and a second position sensor 98 (e.g., an open position sensor). The position sensors 96, 98 can comprise paired optical proximity detectors, such as light emitters, that cooperate with an intermediate sensor 128, such as a light receiver. However, other types of sensors can also be used. As illustrated, the position sensors 96, 98 can be located together in one housing, which can facilitate manufacturability and repair and can reduce the overall space occupied by the position sensors 96, 98. As described in more detail below, in some embodiments, the position sensors 96, 98 can be configured to facilitate detection of the position of the lid 24 as it moves between the open and closed positions. The motor 78 and the position sensors 96, 98 can be configured to communicate with the controller 70 so as to facilitate control of the movement of the lid 24.

In some embodiments, the lid 24 includes the flagging members 92, 94, which can be oriented or otherwise configured as to indicate, in cooperation with the position sensors 96, 98, a position of the lid 24. As shown in FIG. 9, when the lid 24 is in its home or fully closed position, the flagging member 92 is located between the position sensor 96 and the intermediate sensor 128 and the flagging member 94 is not located between the position sensor 98 and the intermediate sensor 128. In some configurations, the flagging member 92 being between the position sensor 96 and the receiver 128 blocks an emission (e.g., a signal) between the position sensor 96 to intermediate sensor 128. In some embodiments, such emission blocking can be interpreted (e.g., by the controller implementing an algorithm) to discern a position of the lid 24. For example, the controller 70 can be configured to determine that the lid 24 is in its home or closed position when flagging member 92 is located in position sensor 96 to block emissions to the intermediate sensor 128.

In some embodiments, as the lid 24 rotates into the fully open position, the flagging member 92 rotates such that it is no longer between the position sensor 96 and the intermediate sensor 128. However, in certain embodiments, as the lid 24 rotates into the fully open position, the flagging member 94 rotates such that it is between the position sensor 98 and the intermediate sensor 128, thereby blocking emissions (e.g., a signal) between the sensor 98 to intermediate sensor 128.

In some embodiments, when the flagging member 94 is located between the position sensor 98 and the intermediate sensor 128, and the flagging member 92 is not located between the position sensor 96 and the intermediate sensor 128, the controller 70 can be configured to determine that the lid 24 is in a fully open position. In certain embodiments, the controller 70 can be configured to determine that the lid 24 is in a fully open position when the opposite orientation occurs. In some embodiments, the intermediate sensor 128 is configured to receive emissions from one or both of the position sensors 96, 98. In some embodiments, the one or both of the position sensors 96, 98 are configured to receive emissions from the intermediate sensor 128.

Any combination of flagging members and position sensors can be used to detect various positions of the lid 24. For example, additional positions (e.g., an about half-way opened position) can be detected with additional sensors and

13

flagging members in a manner similar or different than that described above. Some embodiments have flagging members located in the housing 64 and position sensors on the lid 24.

With reference to FIG. 2, the trash can assembly 20 can also include a sensor assembly 102 disposed on a generally outer portion of the trash can assembly 20. In the illustrated embodiment, the sensor assembly 102 is disposed near the front of the trim member 38, in an upper generally central portion. In some embodiments, the sensor assembly 102 can include an outer covering 104 which can include a transparent or translucent structure that permits transmission and/or receipt of light signals. For example, the outer covering 104 can be made of glass or plastics, such as Polycarbonate, Makrolon®, etc. In some embodiments, the outer covering 104 can be substantially flush with a top surface of the trim member 38. In some embodiments, the sensor assembly 102 can sense a user's movements to direct the lid 24 to open or close. For example, the sensor assembly 102 can sense a reflected or emitted signal or characteristic (e.g., light, thermal, conductivity, magnetism, or otherwise) from a user (e.g., a body part). In some embodiments, the sensor assembly 102 is configured as is described in U.S. Patent Application Publication No. 2011/0220647, filed Mar. 4, 2011, the entirety of which is hereby incorporated by reference.

In some embodiments, the lid 24 can be configured to permit manual operation of the lid 24 generally without damage (e.g., stripping or wearing down) to components of the trash can assembly 20, such as the motor 78, shaft 80, or otherwise. As previously noted, and as illustrated in FIG. 11, the lid 24 can include flanges 88, 90, which can be positioned on the rear underside of the lid 24. As illustrated, generally open circumferential spaces exist between the flanges 88, 90.

The flanges 88, 90 can be configured to engage a clutch mechanism 84, which can enable the lid 24 to rotate without, or without substantial, rotation of the motor 78, shaft 80, or certain other components of the trash can assembly 20, as discussed in more detail below. As illustrated in FIG. 12, the clutch mechanism 84 includes one or more torque transmission members, such as arms 106, 108, that can extend radially outward from a body of the clutch mechanism 84. In some embodiments, the arms 106, 108 are spaced apart from each other, such as by about 180 degrees. Various other angles are contemplated, such as at least: about 30°, about 45°, about 60°, about 90°, about 120°, values in between, or otherwise.

The arms can be positioned in the circumferential spaces between the flanges 88, 90. For example, the arms 106, 108 can abut or contact a surface of the flanges 88, 90, as illustrated in FIG. 13. In certain such configurations, when the arm 106 is abutted with flange 90 and the arm 108 is abutted with flange 90, a circumferential distance D1 exists between a non-abutted surface 108a of the arm 108 and a non-abutted surface 88a of the flange 88. In some embodiments, a generally equal circumferential distance D2 (not shown) exists between a non-abutted surface 106a of the arm 106 and a non-abutted surface 90a (not shown) of the flange 90. In certain configurations, the circumferential distance D1 and/or D2 is greater than or equal to the amount of rotation of the lid from the open to the closed position. For example, the circumferential distance D1 and/or D2 can be at least about 60° and/or less than or equal to about 125°. In certain variants, the circumferential distance D1 and/or D2 is greater than or equal to about 80°. As discussed below, such

14

a configuration can allow the lid 24 to be manually moved between the open and closed positions.

In some embodiments, the clutch mechanism 84 is positioned on the motor shaft 80 between a biasing member, such as a spring 82, and an end member 86. In some embodiments, the end member 86 is fixed to the motor shaft 80, thus torque from the motor 78 can be transmitted through the shaft 80 and into the end member 86. In some embodiments, the bias on the clutch mechanism 84 against the end member 86 can result in a frictional interface between the clutch 84 and end member 86. The frictional interface between the clutch 84 and end member 86 can result in the clutch 84 rotating when the shaft 80 rotates. For example, torque from the motor 78 can be transmitted through the shaft 80, through the end member 86, and into the clutch mechanism 84. In some variants, certain components (e.g., the spring 82, clutch mechanism 84, and end member 86) are positioned in general coaxial alignment along a portion of the longitudinal length of the shaft 80.

During operation of some embodiments, the motor 78 can turn the shaft 80, which can turn the end member 86, which can turn the clutch mechanism 84 (e.g., by the frictional interface between the end member 86 and clutch mechanism 84). Rotation of the clutch mechanism 84 can result in rotation of the arms 106, 108. Because, in some embodiments, the arms 106, 108 generally abut or contact the flanges 88, 90 of the lid 24, rotation of the arms 106, 108 can result in rotation of the flanges 88, 90, and thus the lid 24 (e.g., from the closed to the open position).

As illustrated in FIG. 13, due to the circumferential distances D1, D2 between the non-abutted surfaces 88a, 90a of the flanges 88, 90 and the non-abutted surfaces 106a, 108a of the arms 106, 108, the lid 24 can be manually opened without turning the motor 78. As an example, manual operation of the lid as illustrated in FIG. 13 will now be discussed. As illustrated in FIG. 13, the lid 24 is in the home or closed position. If a user, were to manually operate the lid 24 toward the open position (e.g., rotate the lid clockwise in the illustrated embodiment), the flange 88 would rotate generally clockwise in an arc path and the flange 90 would rotate about an equivalent distance in generally the same direction (e.g., clockwise). No force would be applied to the arms 106, 108 of the clutch mechanism 84, which, as discussed above, is connected with motor shaft 80 via the end member 86. Similarly, a user could then close the lid 24 and the flanges 88, 90 would rotate in generally the opposite direction (e.g., counter-clockwise) as when the lid was opened, back to their original positions when the lid 24 was in the home position, without applying any force to the arms 106, 108 of the clutch mechanism 84. Thus, in certain embodiments, no force is required to be applied to the arms 106, 108 to turn the clutch mechanism 84 and motor shaft 80.

As noted above, in some embodiments, the power operated driving mechanism 58 can be used to open or close the lid 24. For instance, the motor 78 can rotate the shaft 80, which can rotate the end member 86, which can transmit the torque to the clutch mechanism 84, which can rotate the flanges 88, 90 and the lid 24. In some embodiments, a coupling device can be positioned between the motor 78 and the shaft 80 to reduce vibrations from being transferred from the motor 78 to other mechanism being driven, such as the lid 24. In certain instances, after or during operation of the driving mechanism 58 (e.g., after or as the lid 24 is being moved between the open and closed positions), a user may accidentally or intentionally try to manually close or open the lid 24. In certain such situations, the flanges 88, 90

generally remain in contact with the arms **106**, **108** rather than rotating relative to the arms **106**, **108** as discussed above. In some embodiments, this is because the rotational force produced by the motor **78** (via the shaft **80**, end member **86**, and/or clutch mechanism **84**) encourages rotation of the arms **106**, **108** against the flanges **88**, **90** (e.g., the arms **106**, **108** apply a pushing force to the surfaces of the flanges **88**, **90** to rotate the lid **24**). Thus, in some embodiments, a user who manually closes the lid **24** when the motor has opened, or is in the process of opening the lid **24**, acts against the operation of the motor **78**.

For example, when the motor **78** of FIG. **13** is opening the lid **24**, the motor **78** encourages the arms **106**, **108** to abut against and turn the flanges **88**, **90** to turn in a clockwise direction (viewed from the perspective of FIG. **13**). Yet when a user manually attempts to close the lid **24**, the lid and the flanges **88**, **90** are encouraged in a counter-clockwise direction (viewed from the perspective of FIG. **13**). Thus, in certain configurations, the arms **106**, **108** are being encouraged to rotate in opposite directions concurrently. Such a scenario can result in damage to the arms **106**, **108** of the clutch mechanism **84**, the shaft **80**, the motor **78**, or otherwise. In some embodiments, to generally avoid such damage, the clutch mechanism **84** or other structure can be configured to rotate with respect to the end member **86** or other components.

In some embodiments, the clutch mechanism **84** includes a first cam surface **180** and a first return surface **182**. As shown in FIG. **12**, the first cam surface **180** can be inclined from a first level to a second level, in relation to a plane extending generally transverse to the longitudinal axis of the clutch mechanism **84**. The first return surface **182** can intersect the first cam surface **180** and can be disposed between the first and second levels.

In some embodiments, the end member **86** includes a second cam surface **184** and a second return surface **186**. The second cam surface **184** can be inclined from a first level to a second level, in relation to a plane extending generally transverse to the longitudinal axis of the end member **86** and the shaft **80**. The second return surface **186** can intersect the first cam surface **180** and can be disposed between the first and second levels.

The second cam surface **184** and the second return surface **186** of the end member **86** can be shaped to correspond with the first cam surface **180** and the first return surface **182** of the clutch mechanism **84**, thereby allowing mating engagement of the end member **86** and the clutch mechanism **84**. For example, summits **180a** of the first cam surface **180** can be nested in the valleys **184b** of the second cam surface **184**, and summits **184a** of the second cam surface **184** can be nested in the valleys **180b** of the first cam surface **180**.

As previously discussed, in some embodiments, torque from the motor **112** can be transmitted through the shaft **80** to the end member **86**. In some embodiments, the end member **86** is generally rigidly connected with the shaft **80**, such as by a fastener (e.g., a screw). Thus, in certain variants, the end member **86** is inhibited or prevented from rotating relative to the shaft **80**. In certain implementations, the end member **86** is configured to transmit torque from the motor **112** to the clutch mechanism **84**, such as by friction between the first and second cam surfaces **180**, **184** and/or between the first and second return surfaces **182**, **186**.

In some embodiments, the clutch mechanism **84** can translate along a portion of the longitudinal length of the shaft **80**. As shown, the biasing member **82** can bias the clutch mechanism **84** into engagement with the end member **86**. In some embodiments, translation of the clutch mechanism

84 (e.g., in a direction generally toward the motor **112**) along a portion of the drive shaft **80** is generally against the bias of the biasing member **82**.

In some embodiments, when the lid **24** is manually operated, the clutch mechanism **84** and the end member **86** rotate relative to each other. For example, in some embodiments, when the lid **24** is manually operated the first and second inclined cam surfaces **180**, **184** move relative to each other. In certain configurations, the inclined cam surfaces **180**, **184** slide relative to each other, which results in the inclined cam surfaces climbing each other. For example, as the inclined cam surfaces **180**, **184** slide relative to each other, the summits **180a**, **184a** of the inclined cam surfaces **180**, **184** circumferentially approach each other.

In certain embodiments, the relative movement between the first and second inclined cam surfaces **180**, **184** (e.g., by the interaction of the inclines) urges the clutch mechanism **84** and the end member **86** apart. For example, the clutch mechanism **84** and the end member **86** can be urged in generally opposite directions along the longitudinal axis of the shaft **80**. In some embodiments, the end member **86** is generally restrained from moving longitudinally (e.g., by the fastener). However, certain embodiments of the clutch mechanism **84** are able to move away from end member **86** by translating along the shaft **80** (e.g., against the bias of the biasing member **82**). Thus, in certain implementations, relative rotation of the inclined cam surfaces **180**, **184** results in the clutch mechanism **84** translating along a portion of the longitudinal length of the shaft **80** (e.g., in a direction generally toward from the motor **78**), against the bias of the biasing member **82**. Certain embodiments can facilitate relative rotation of the clutch mechanism **84** and the end member **86** without imposing undue stress on, or damage to, the clutch mechanism **84**, end member **86**, shaft **80**, and/or motor **78**. Accordingly, manual operation of the lid **24** can be performed without imposing undue stress on, or damage to, components of the trash can assembly **20**.

In some implementations, when manual operation of the lid **24** ceases, the bias of the biasing member **82** can return the clutch mechanism **84** into generally full engagement with the end member **86**. For example, after manual operation of the lid **24** ceases, the bias of the biasing member **82** can facilitate re-engagement of the inclined cam surfaces **180**, **184**. In some embodiments, re-engaging the clutch mechanism **84** and the end member **86** allows the transmission of torque from the motor **78** to the clutch mechanism **84**, which can provide powered operation of the lid. Thus, some embodiments provide automatic and/or passive engagement and/or disengagement of the motor **78** and/or drive shaft **80** from the clutch mechanism **84** and/or the lid **24**.

Although the trash cans have been disclosed in the context of certain embodiments and examples, it will be understood by those skilled in the art that the present disclosure extends beyond the specifically disclosed embodiments to other alternative embodiments and/or uses of the trash cans and obvious modifications and equivalents thereof. In addition, while several variations of the trash cans have been shown and described in detail, other modifications, which are within the scope of the present disclosure, will be readily apparent to those of skill in the art. For example, a gear assembly and/or alternate torque transmission components can be included. For instance, in some embodiments, the trash can assembly **20** includes a gear assembly. Some embodiment of the gear assembly include a gear reduction (e.g., greater than or equal to about 1:5, 1:10, 1:50, values in between, or any other gear reduction that would provide the

17

desired characteristics), which can modify the rotational speed applied to the shaft **80**, clutch mechanism **84**, and/or other components.

It is also contemplated that various combinations or sub-combinations of the specific features and aspects of the embodiments can be made and still fall within the scope of the present disclosure. It should be understood that various features and aspects of the disclosed embodiments can be combined with or substituted for one another in order to form varying modes of the trashcans. Thus, it is intended that the scope of the present disclosure should not be limited by the particular disclosed embodiments described above.

The following is claimed:

1. A trash can assembly comprising:
 - a body component comprising a lower base, an upper opening, and a front upper edge; and
 - a lid assembly configured to couple with the body component, the lid assembly comprising:
 - a lid configured to rotate, relative to the body, between a lower position and an upper position; and
 - a trim member configured to rotate between a closed position and an open position, wherein:
 - in the closed position, a front of the trim member is adjacent the front upper edge of the body component; and
 - in the open position, the front of the trim member is spaced apart from and vertically higher than the front upper edge of the body component; and
 - a power transmission device configured to drive the lid between the lower position and the upper position; and
 - a retaining mechanism configured to maintain the trim member in the open position against the force of gravity.
2. The trash can assembly of claim 1, wherein the retaining mechanism comprises a detent.
3. The trash can assembly of claim 1, wherein, in the open position, the trim member is at an acute angle with respect to a longitudinal axis of the body component.
4. The trash can assembly of claim 1, wherein the retaining mechanism comprises a cam structure and a recess, the cam structure configured to be received in the recess when the trim member is in the open position.
5. The trash can assembly of claim 4, wherein:
 - the retaining mechanism further comprises a ramp; and
 - the trash can assembly is configured such that, as the trim member rotates from the closed position to the open position, the cam structure slides along the ramp and engages into the recess.
6. The trash can assembly of claim 5, wherein:
 - the cam structure is positioned on the trim ring; and
 - the ramp is positioned on a backside enclosure that is positioned on an exterior surface of a rear wall of the trash can assembly.
7. The trash can assembly of claim 1, wherein:
 - a majority of the periphery of the lid is received in the trim member when the trim member is in the closed position and the lid is in the lower position; and
 - a majority of the periphery of the lid is positioned outside of the trim member when the trim member is in the closed position and the lid is in the upper position.
8. The trash can assembly of claim 1, wherein, when the lid is in the lower position and the trim ring is in the closed position, the entire periphery of the lid is received in the trim ring.
9. The trash can assembly of claim 1, wherein the trim member and the lid are configured to rotate about the same axis.

18

10. The trash can assembly of claim 1, wherein the trim member further comprises an exterior wall that extends: generally parallel with a longitudinal axis of the trash can; downward beyond an upper lip of the body component; and radially outward from the upper lip of the body component.

11. The trash can assembly of claim 1, wherein the body component has a rectangular shape.

12. The trash can assembly of claim 1, wherein at least a front half of the body portion has a generally cylindrical shape.

13. The trash can assembly of claim 1, wherein the power transmission device comprises a motor.

14. The trash can assembly of claim 13, wherein the lid assembly further comprises an electronic sensor, wherein the motor is configured to be activated in response to a signal from the electronic sensor, and wherein the trash can assembly is configured such that the electronic sensor is disabled when the trim member is in the open position.

15. The trash can assembly of claim 1, wherein the power transmission device comprises a footpedal.

16. The trash can assembly of claim 1, wherein the body component further comprises an internal liner configured to support a trash bag.

17. A method of mounting a trash bag, the method comprising:

- obtaining a trash can assembly comprising a body component, lid, and trim ring, the lid and trim ring each configured to rotate relative to the body component;
- rotating the trim ring from a closed position to an open position;
- engaging the trim ring with a retaining mechanism;
- maintaining the trim ring in the open position against the force of gravity with the retaining mechanism, the trim ring being held in the open position at an acute angle with respect to a longitudinal axis of the body component;
- inserting a trash bag into the trash can assembly;
- positioning an upper portion of the trash bag over an upper edge of the body component;
- disengaging the trim ring from the retaining mechanism; and
- rotating the trim ring from the open position to the closed position.

18. The method of claim 17, further comprising visually obscuring, with the trim ring, the upper portion of the trash bag and the upper edge of the body component.

19. The method of claim 17, further comprising rotating the lid from a lower position to an upper position, rotating the lid from the upper position to the lower position, and receiving the entire periphery of the lid in the trim ring.

20. The method of claim 17, wherein rotating the trim ring from the closed position to the open position further comprises rotating the trim ring about the same axis as the lid.

21. The method of claim 17, wherein engaging the trim ring with the retaining mechanism comprises engaging the trim ring with a detent.

22. The method of claim 17, wherein engaging the trim ring with the retaining mechanism comprises sliding a cam structure along a ramp in a first direction, and receiving the cam structure in a recess.

23. The method of claim 22, wherein disengaging the trim ring with the retaining mechanism comprises removing the

19

cam structure from the recess, and sliding the cam structure along the ramp in a second direction that is generally opposite the first direction.

* * * * *

20