US 20110026232A1

(19) **United States**

(12) **Patent Application Publication**

Lin et al.

(10) **Pub. No.: US 2011/0026232 A1**

(43) **Pub. Date: Feb. 3, 2011**

(54) **SYSTEM-IN PACKAGES**

(75) Inventors: **Mou-Shiung Lin**, Hsin-Chu (TW); **Jin-Yuan Lee**, Hsin-Chu (TW)

Correspondence Address:
McDermott Will & Emery LLP
600 13th Street, NW
Washington, DC 20005-3096 (US)

(73) Assignee: **Megica Corporation**, Hsin-Chu (TW)

(21) Appl. No.: **12/841,981**

(22) Filed: **Jul. 22, 2010**

Related U.S. Application Data

(60) Provisional application No. 61/229,756, filed on Jul. 30, 2009.

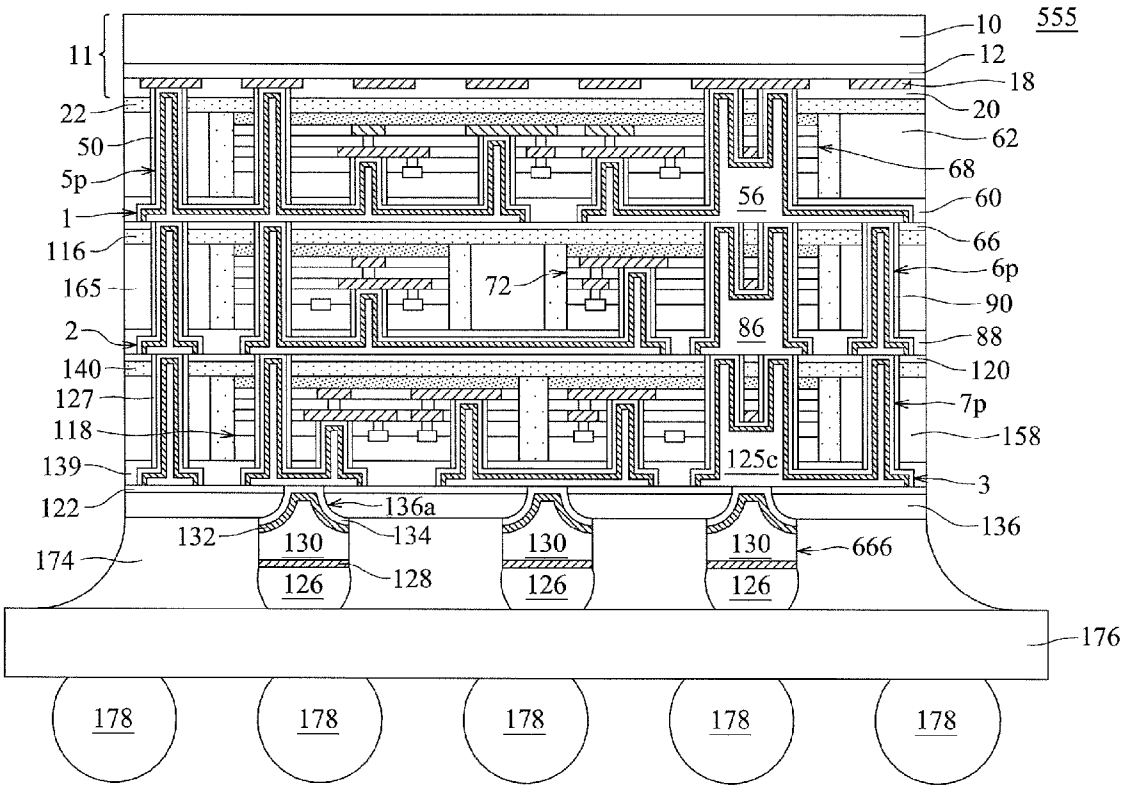
Publication Classification

(51) **Int. Cl.**
H05K 7/02 (2006.01)

(52) **U.S. Cl.** **361/760**

(57) **ABSTRACT**

System-in packages, or multichip modules, are described which can include multi-layer chips and multi-layer dummy substrates over a carrier, multiple through vias blindly or completely through the multi-layer chips and completely through the multi-layer dummy substrates, multiple metal plugs in the through vias, and multiple metal interconnects, connected to the metal plugs, between the multi-layer chips. The multi-layer chips can be connected to each other or to an external circuit or structure, such as mother board, ball grid array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the metal plugs and the metal interconnects.



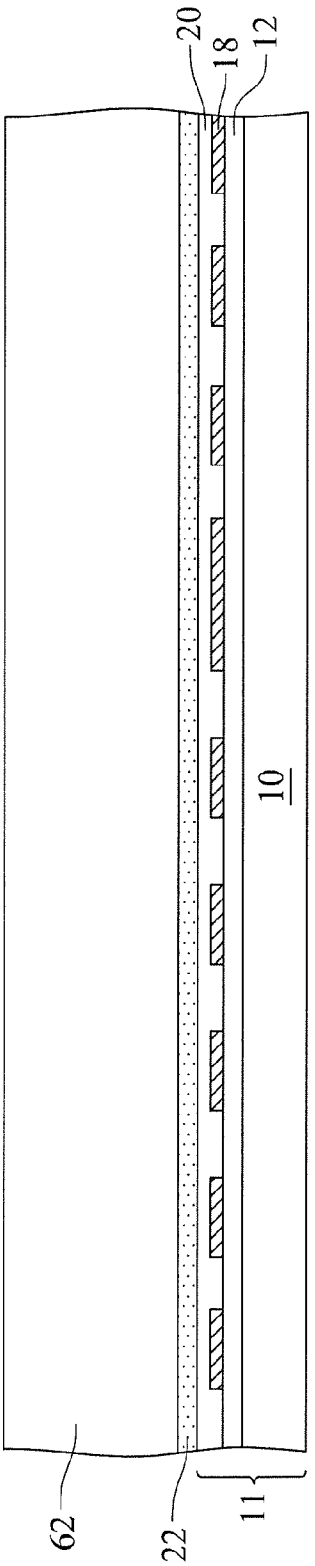


Fig. 1

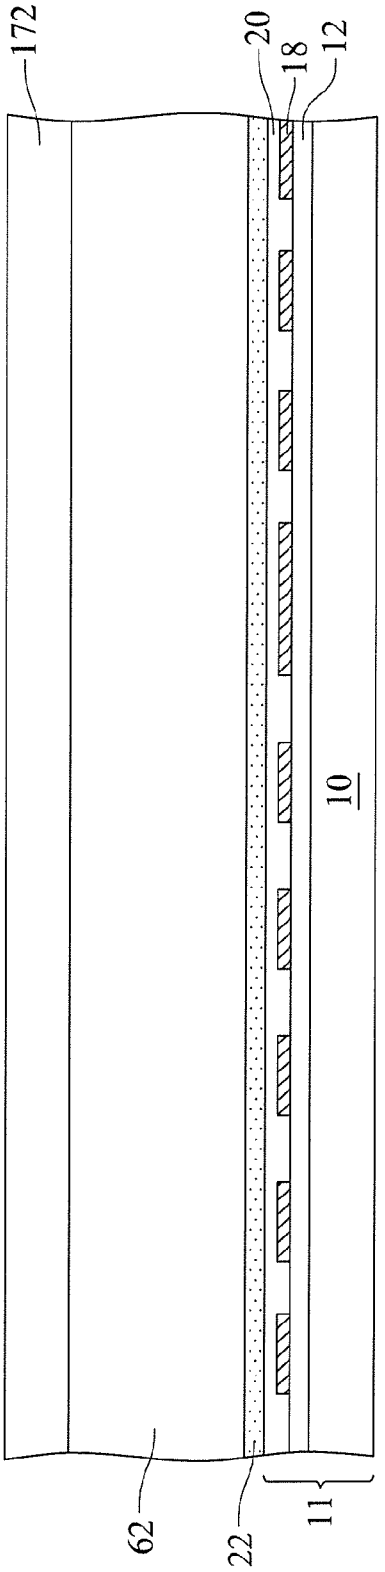


Fig. 2

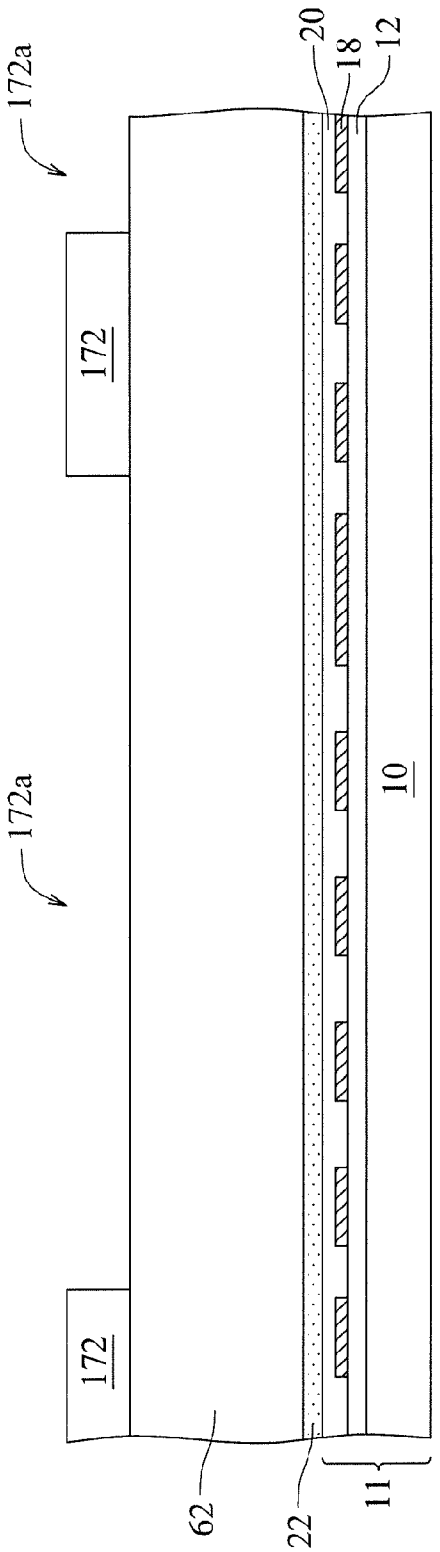


Fig. 3

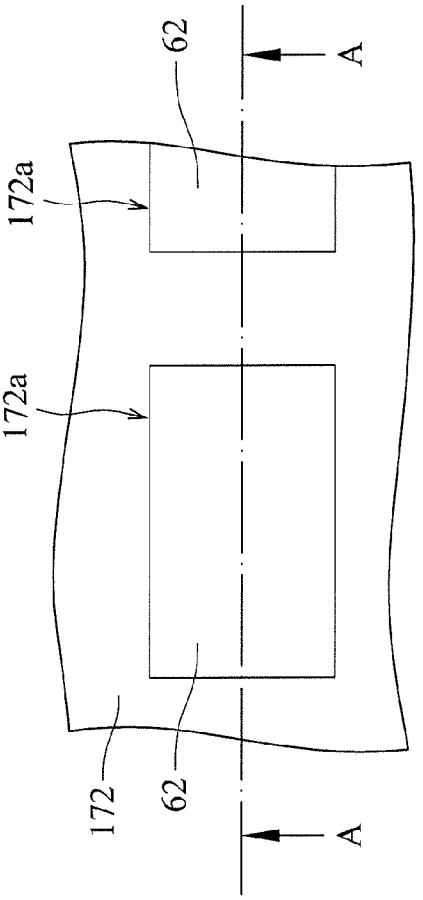


Fig. 4

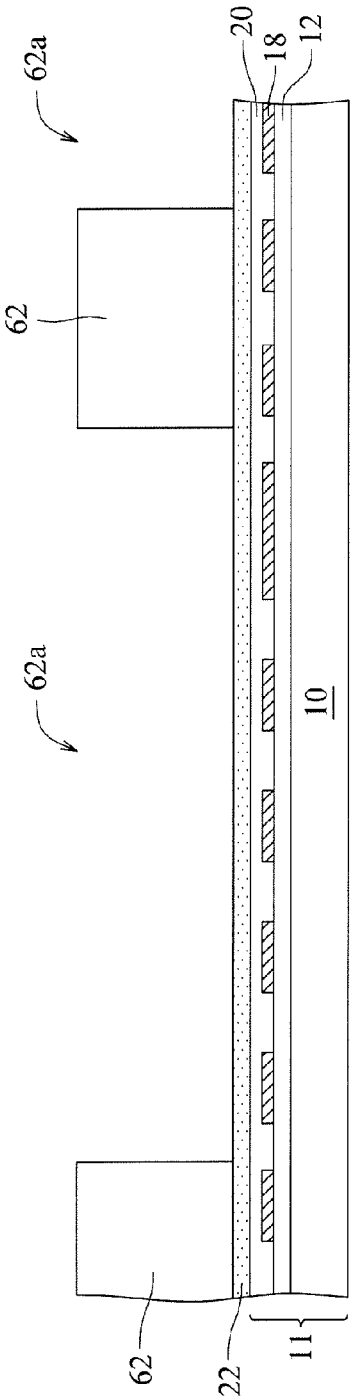


Fig. 5

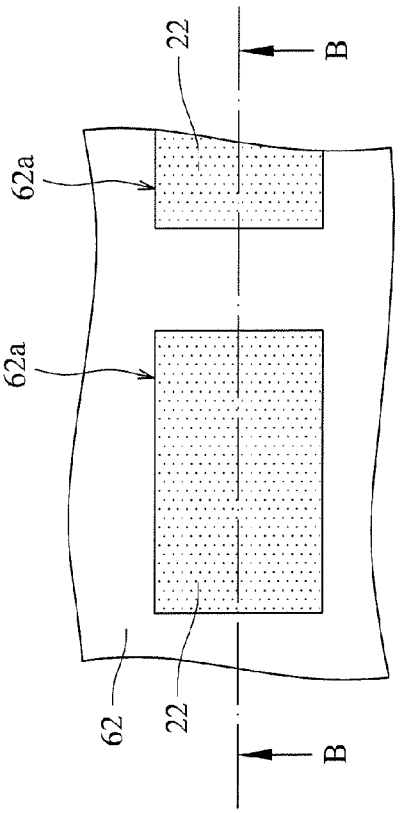


Fig. 6

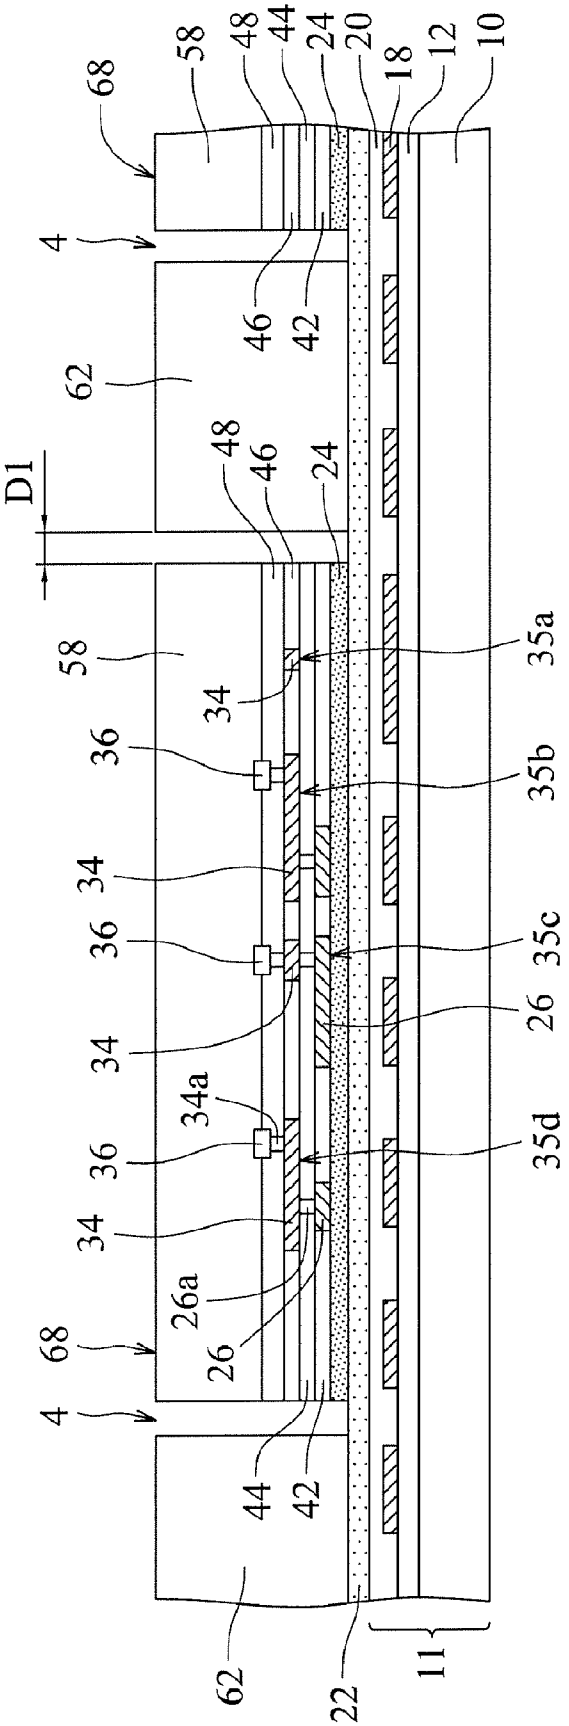

68
58
48
44
24
20
18
12
10
4
46
42
62
D1
48
46
24
58
35a
34
36
35b
34
36
35c
26
34
34a
36
35d
34
26a
26
68
4
44
42
62
22
11

Fig. 7

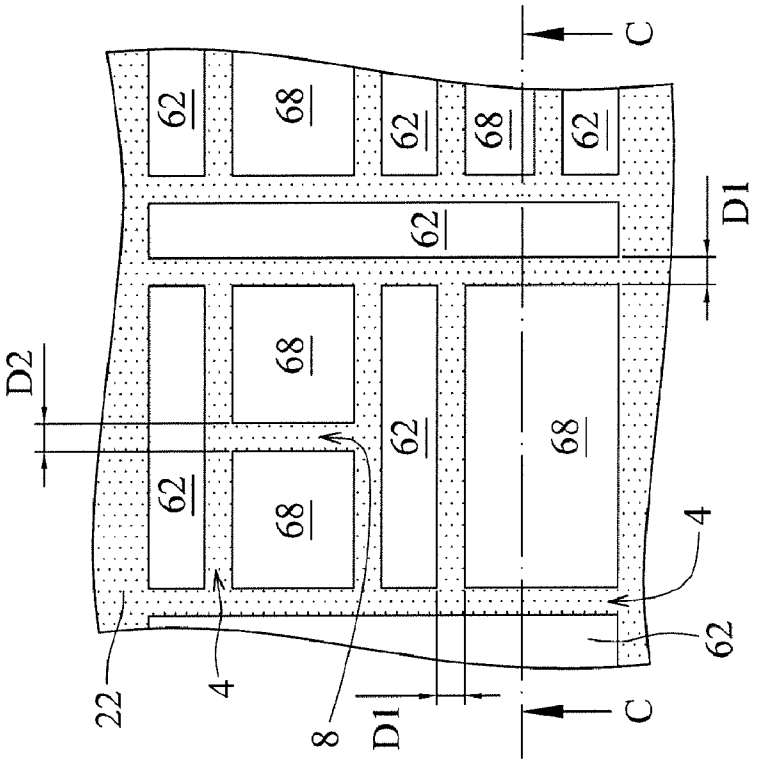

C
62
68
62
68
62
D1
62
D2
68
62
68
62
68
4
62
22
4
8
D1
C

Fig. 9

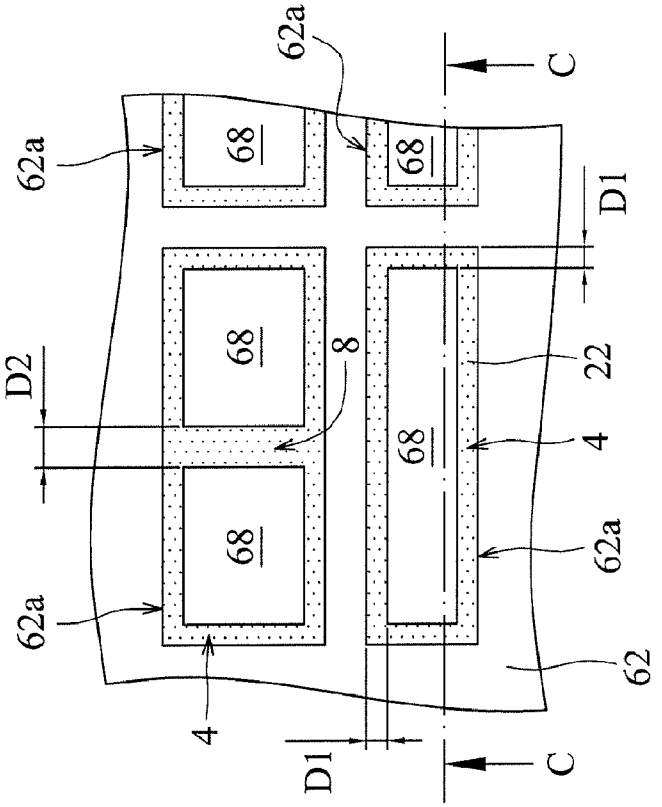

62a
C
62a
68
68
D1
D2
68
8
22
68
4
68
62a
62a
4
62
D1
C

Fig. 8

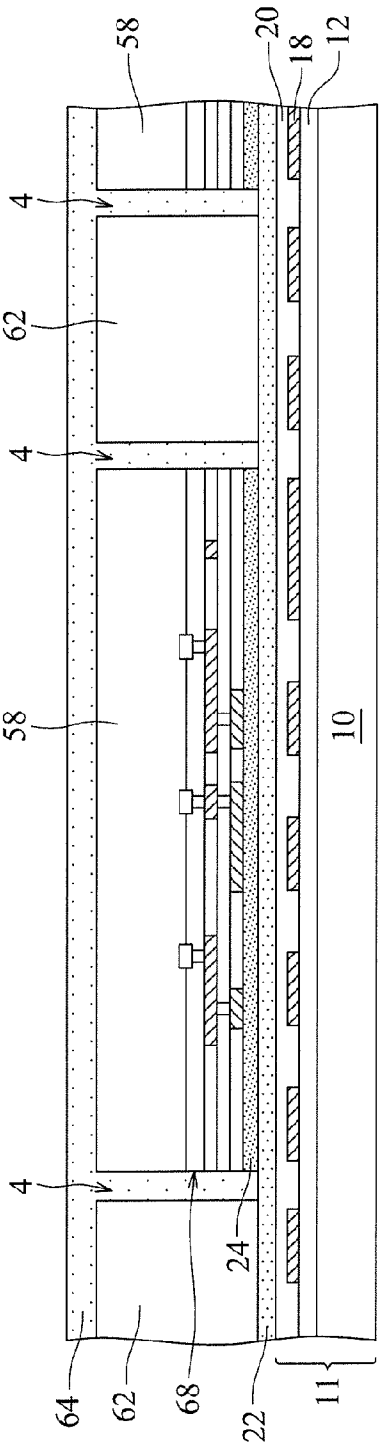

58
20
18
12
4
62
4
58
4
64
62
68
24
22
11
10

Fig. 10

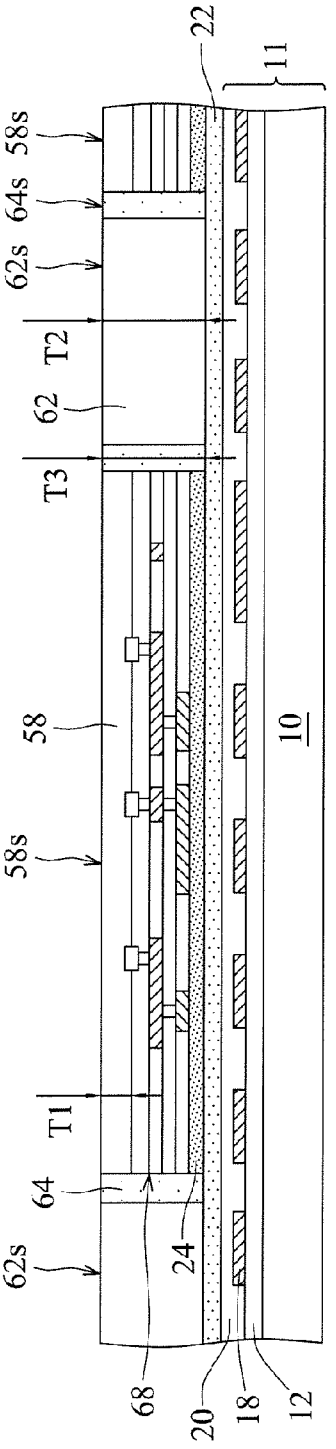

22
11
58s
64s
62s
T2
62
T3
58
58s
T1
64
62s
24
68
20
18
12
10

Fig. 11

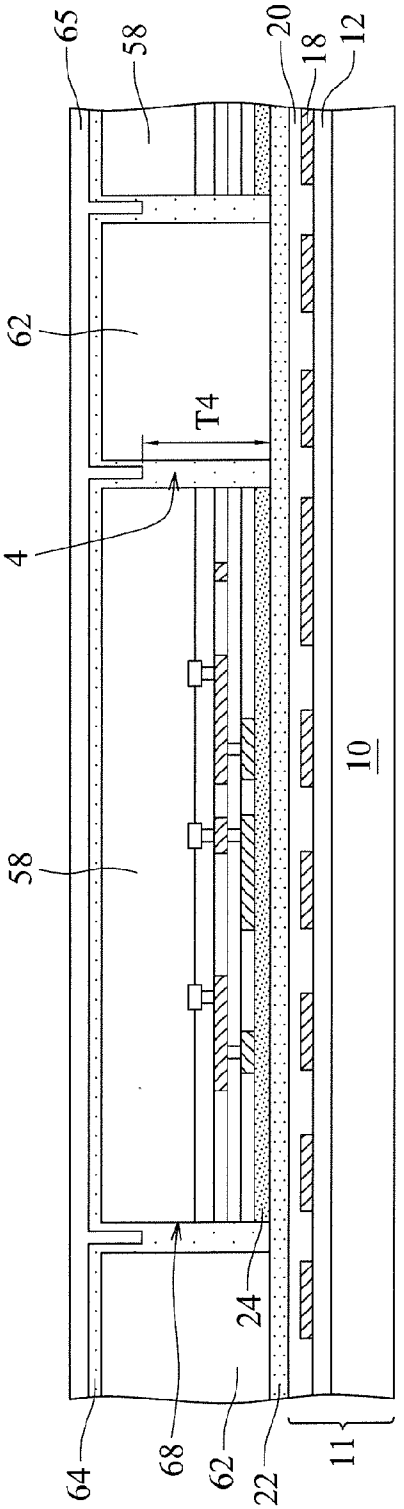

65
58
20
18
12
62
T4
4
58
10
64
68
62
22
24
11

Fig. 12

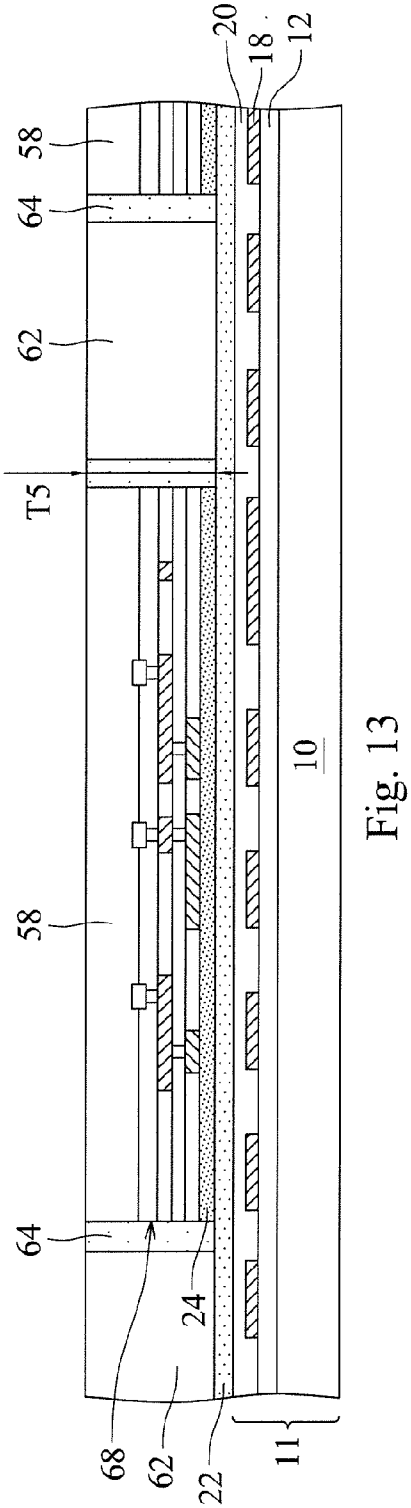

20
18
12
58
64
62
T5
58
10
64
68
62
22
24
11

Fig. 13

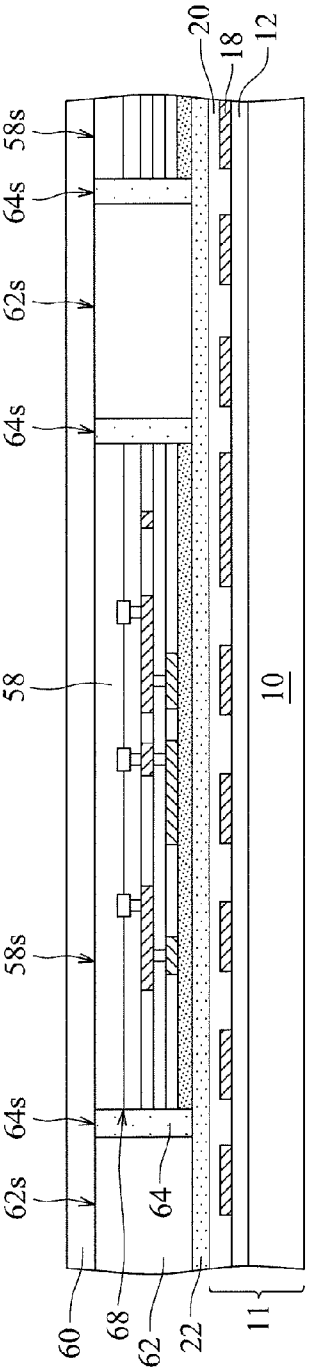

20
18
12
58s
64s
62s
64s
58
10
58s
64s
62s
64
60
68
62
22
11

Fig. 14

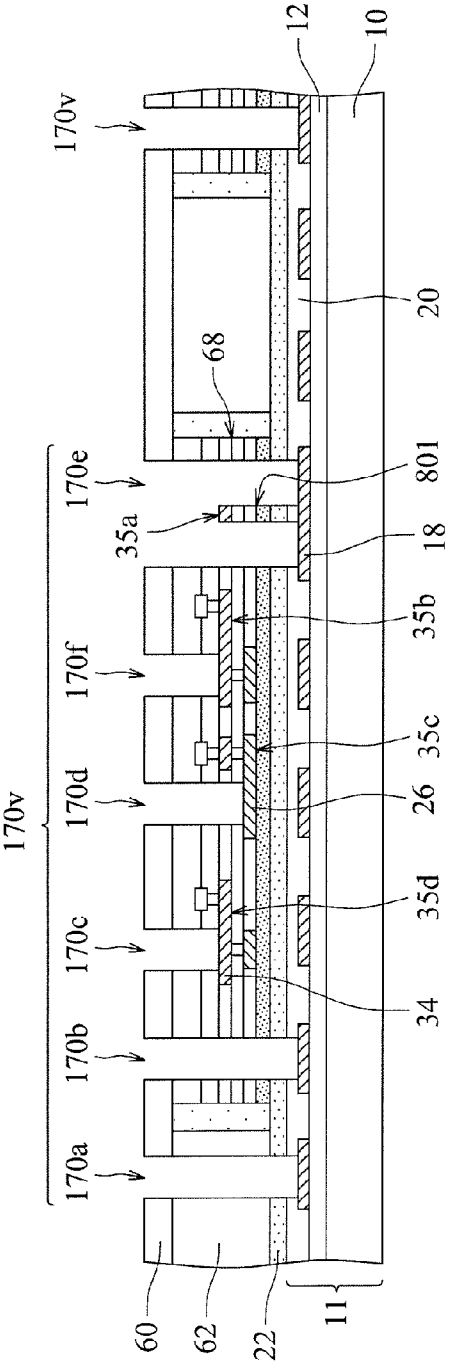

12
10
170v
20
68
801
170e
35a
18
35b
170f
35c
170d
26
35d
170c
34
170b
170a
60
62
22
11

Fig. 15

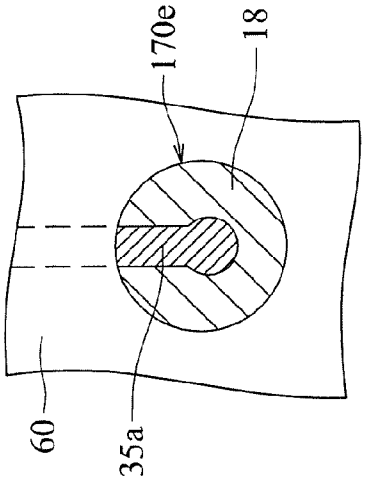


Fig. 18

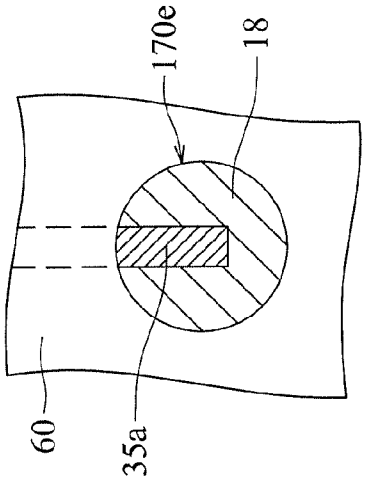


Fig. 17

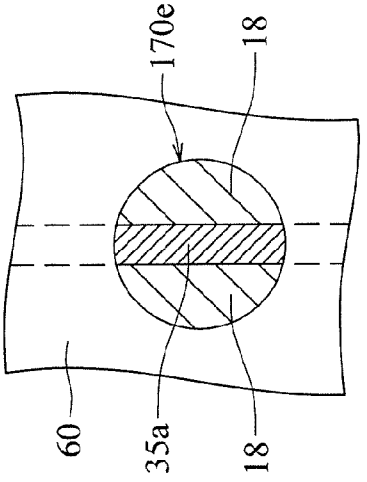


Fig. 16

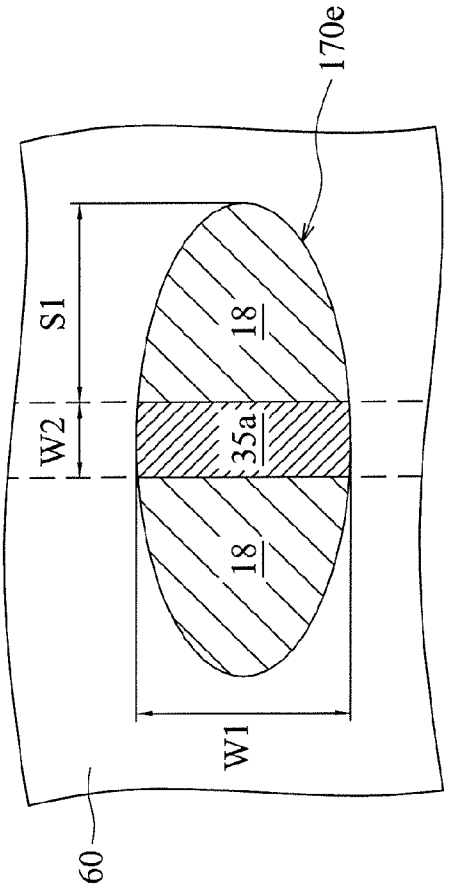


Fig. 16A

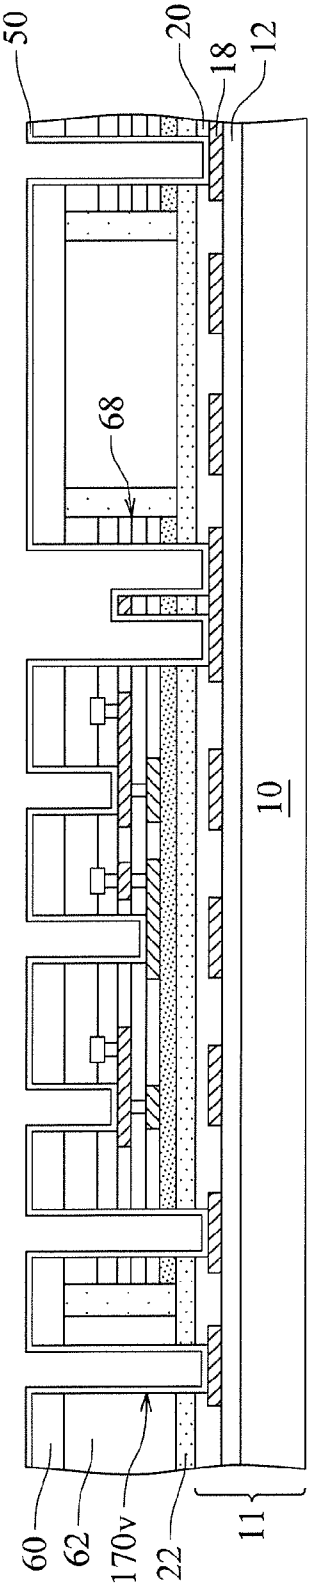

50
20
18
12
68
10
60
62
170v
22
11

Fig. 19

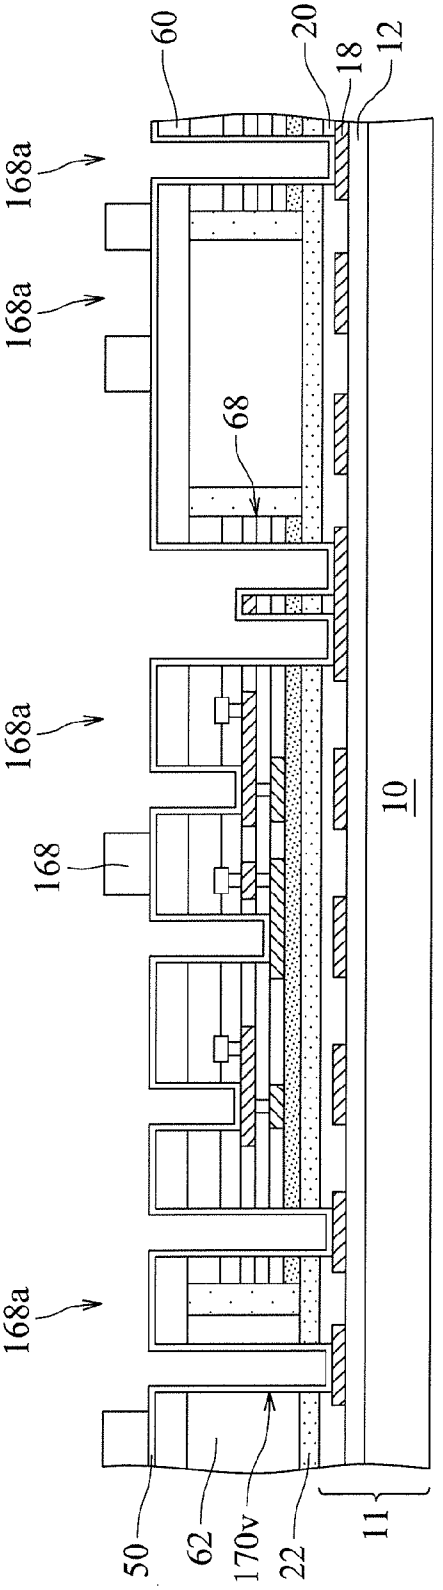

60
20
18
12
168a
168a
68
168a
168
10
168a
50
62
170v
22
11

Fig. 20

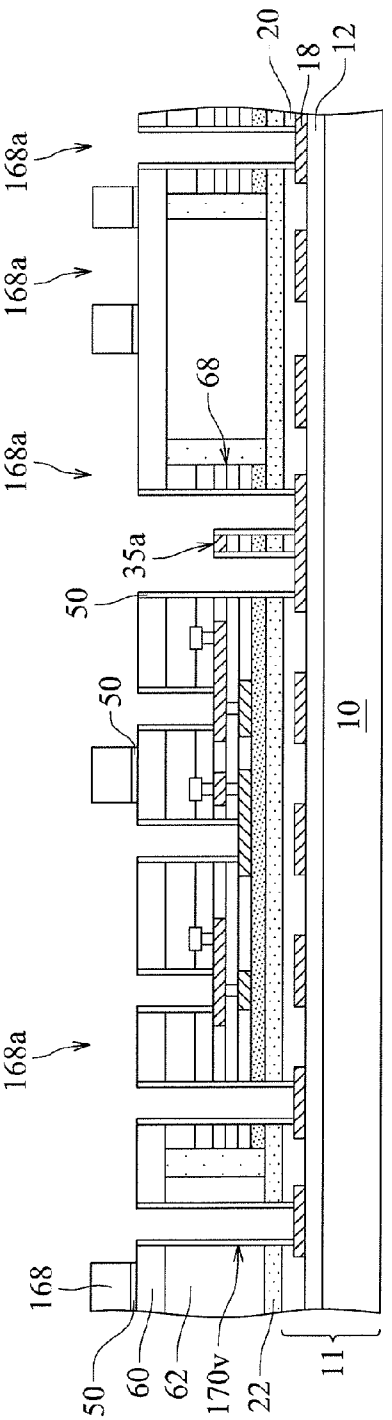

20
18
12
168a
168a
168a
68
35a
50
50
168a
168
50
60
62
170v
22
11
10

Fig. 21

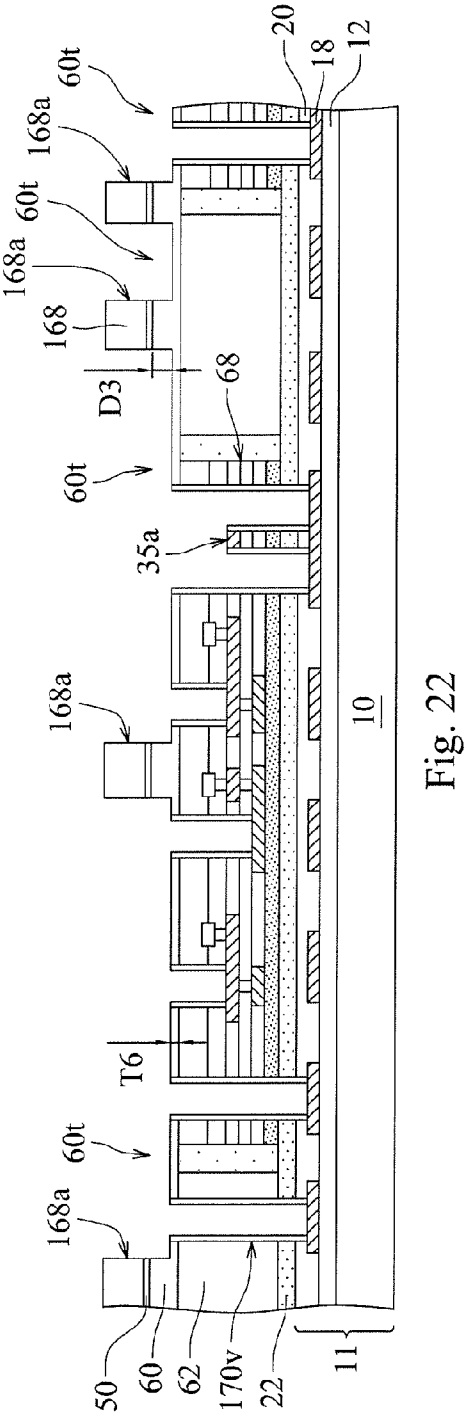

20
18
12
60t
168a
60t
168a
168
D3
68
60t
35a
168a
T6
60t
168a
50
60
62
170v
22
11
10

Fig. 22

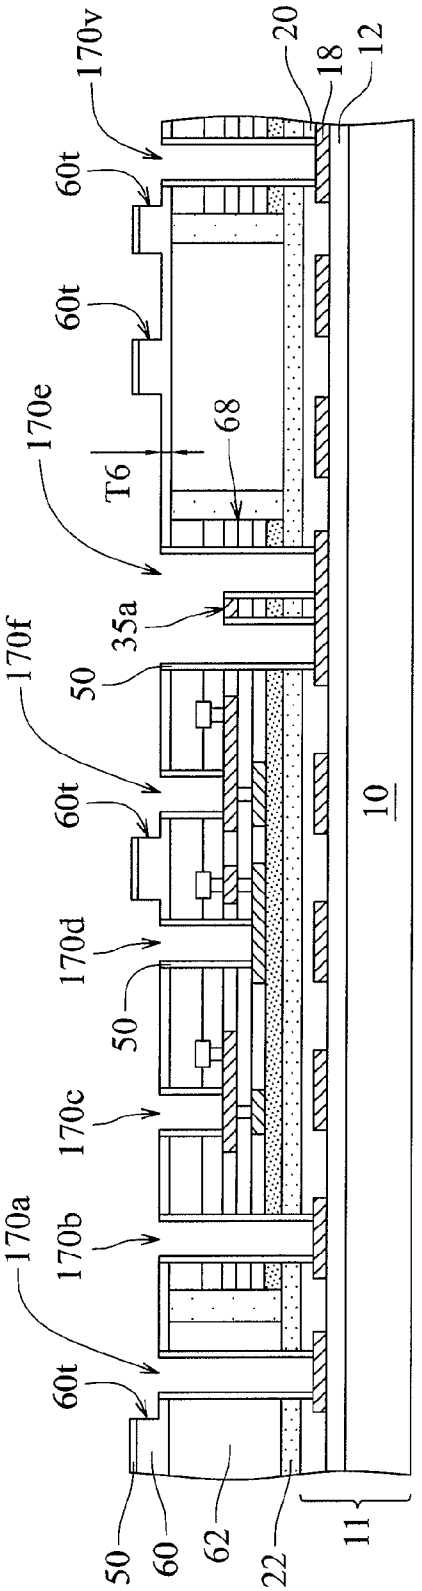

170v
20
18
12
60t
60t
170e
T6
68
35a
170f
50
60t
170d
50
170c
170a
170b
60t
50
60
62
22
11
10

Fig. 23

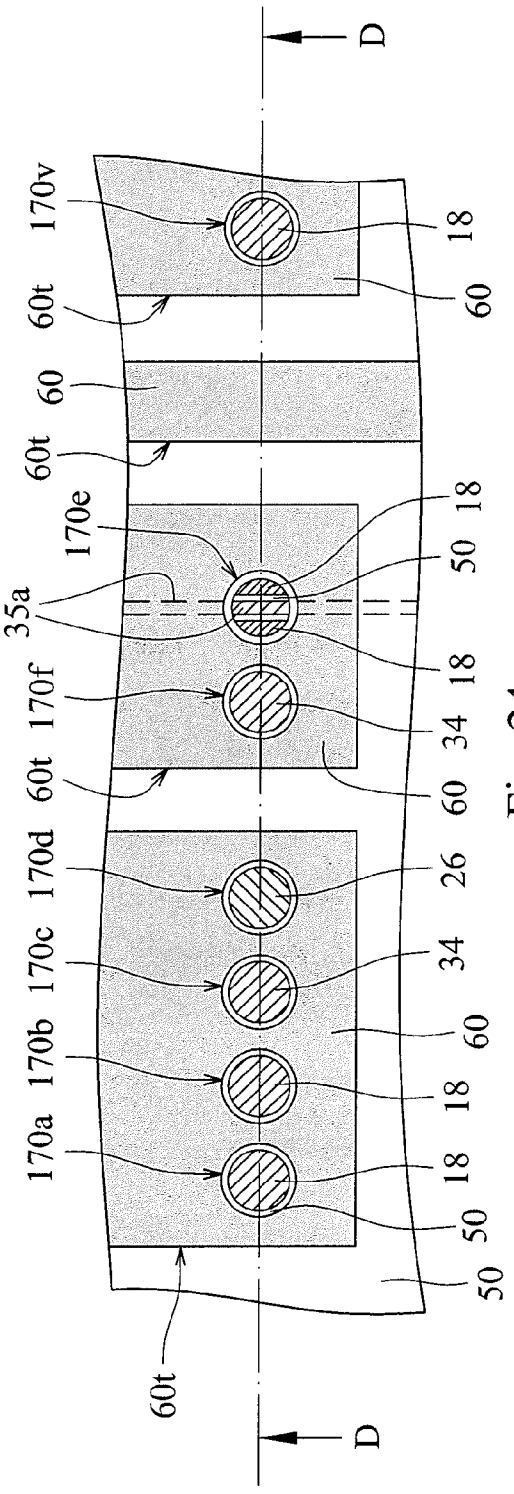

D
170v
18
60t
60
60t
170e
35a
50
18
18
170f
34
60t
60
170d
26
170c
34
170b
60
18
170a
18
50
50
60t
D

Fig. 24

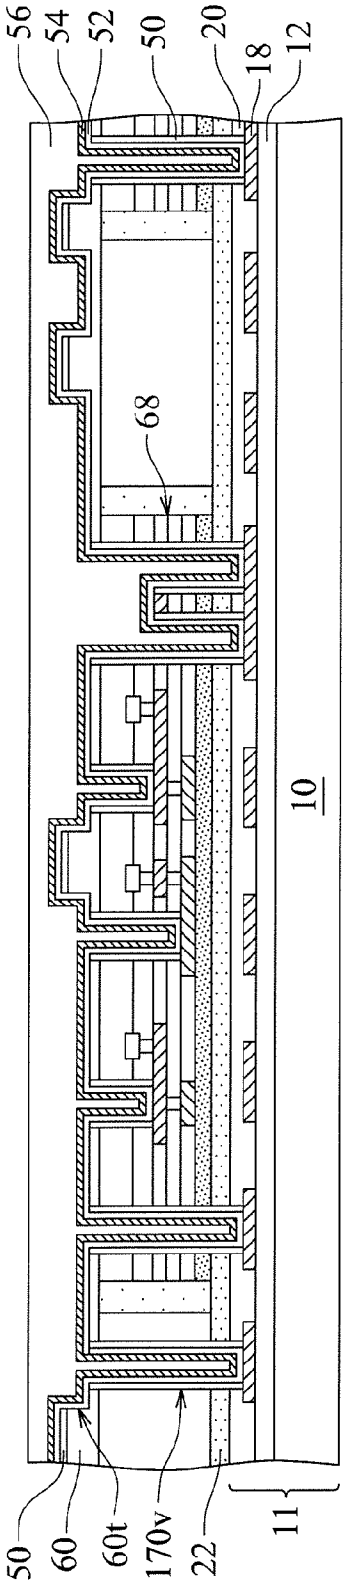

56
54
52
50
20
18
12
68
10
50
60
60t
170v
22
11

Fig. 25

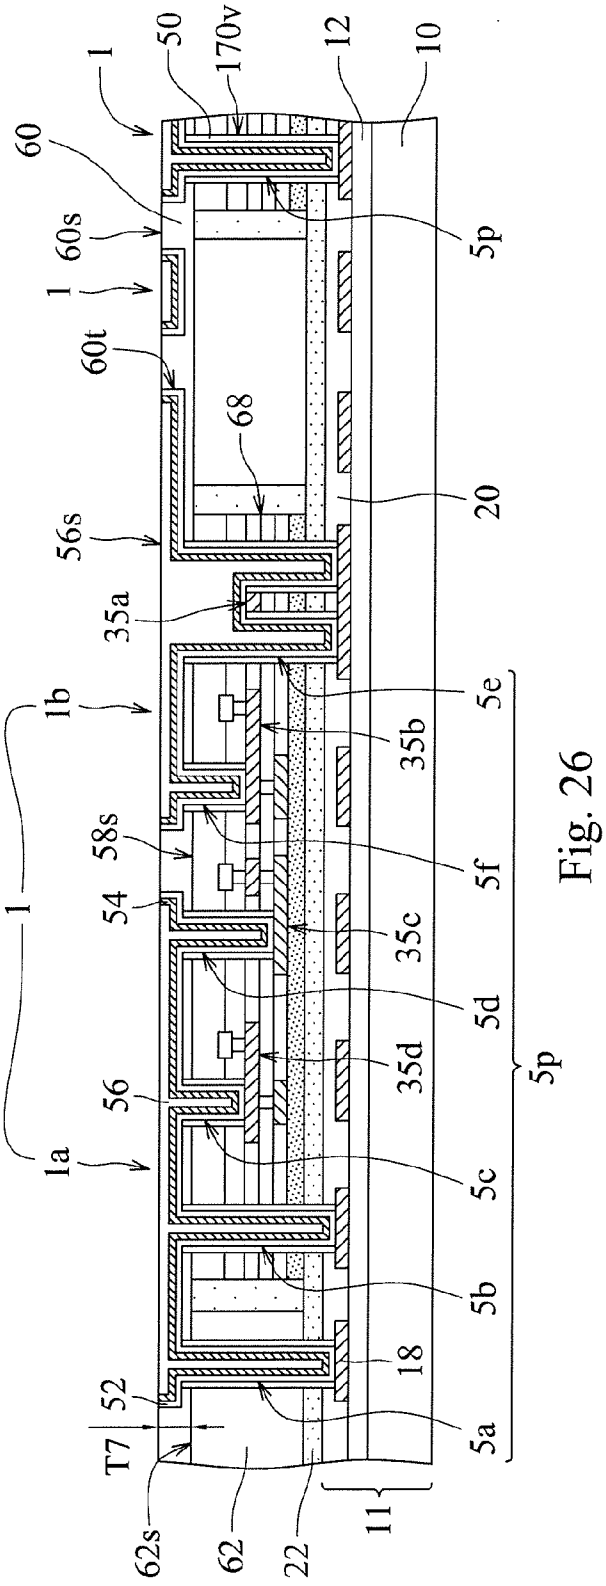

1
50
170v
12
10
60
60s
1
60t
68
5p
20
56s
35a
1b
5e
35b
58s
5f
1
54
35c
5d
35d
5p
56
1a
5c
5b
18
52
5a
T7
62s
62
22
11

Fig. 26

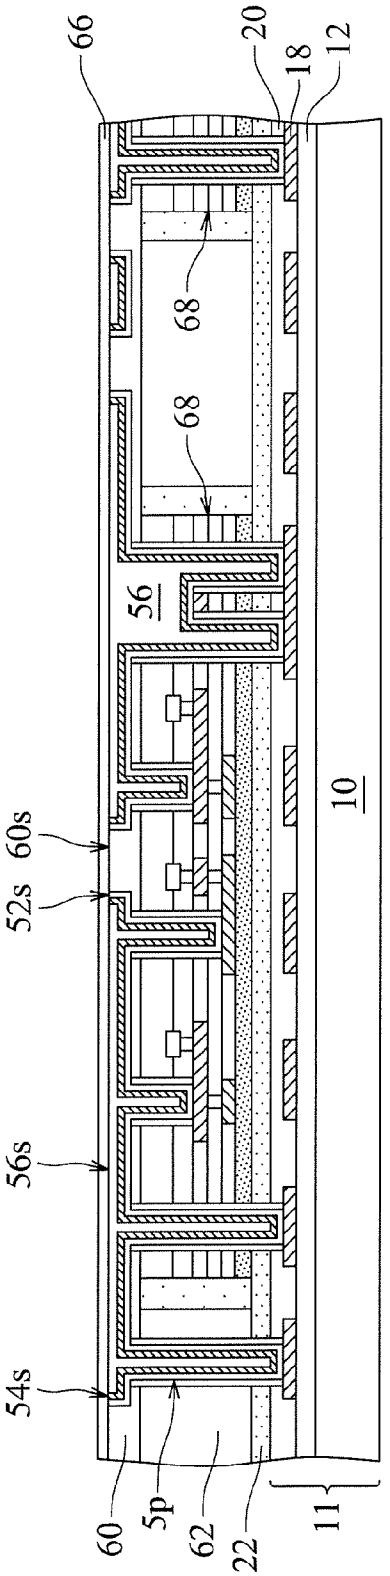

66
20
18
12
68
68
56
10
60s
52s
56s
54s
60
5p
62
22
11

Fig. 27

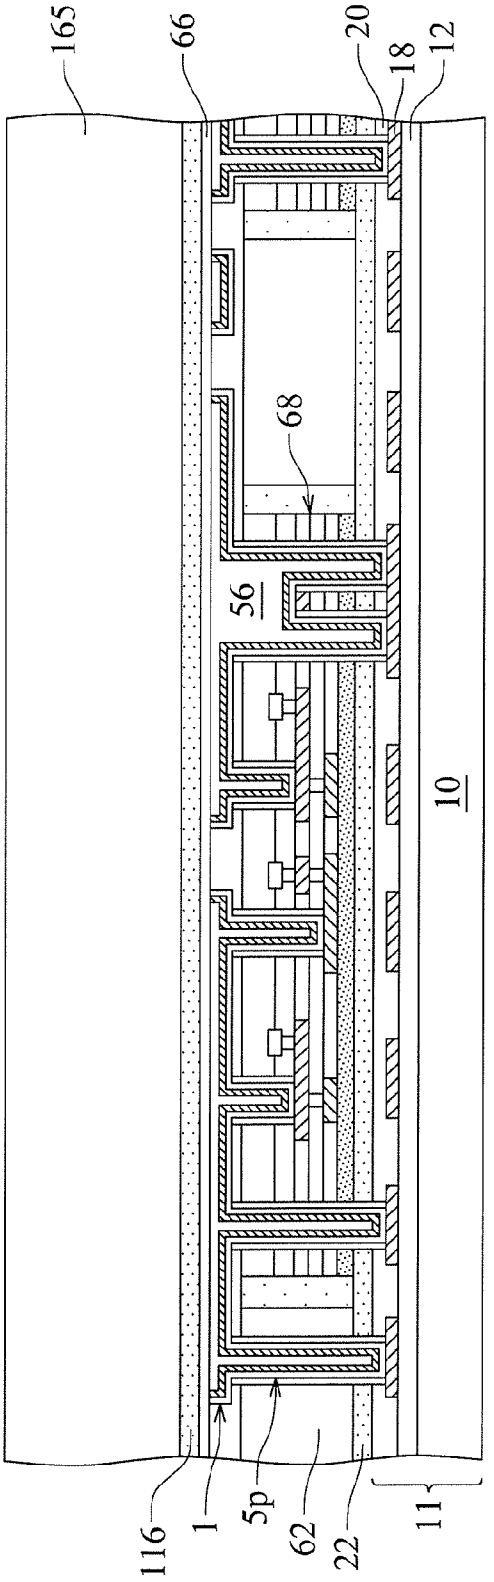

165
66
20
18
12
68
56
10
116
1
5p
62
22
11

Fig. 28

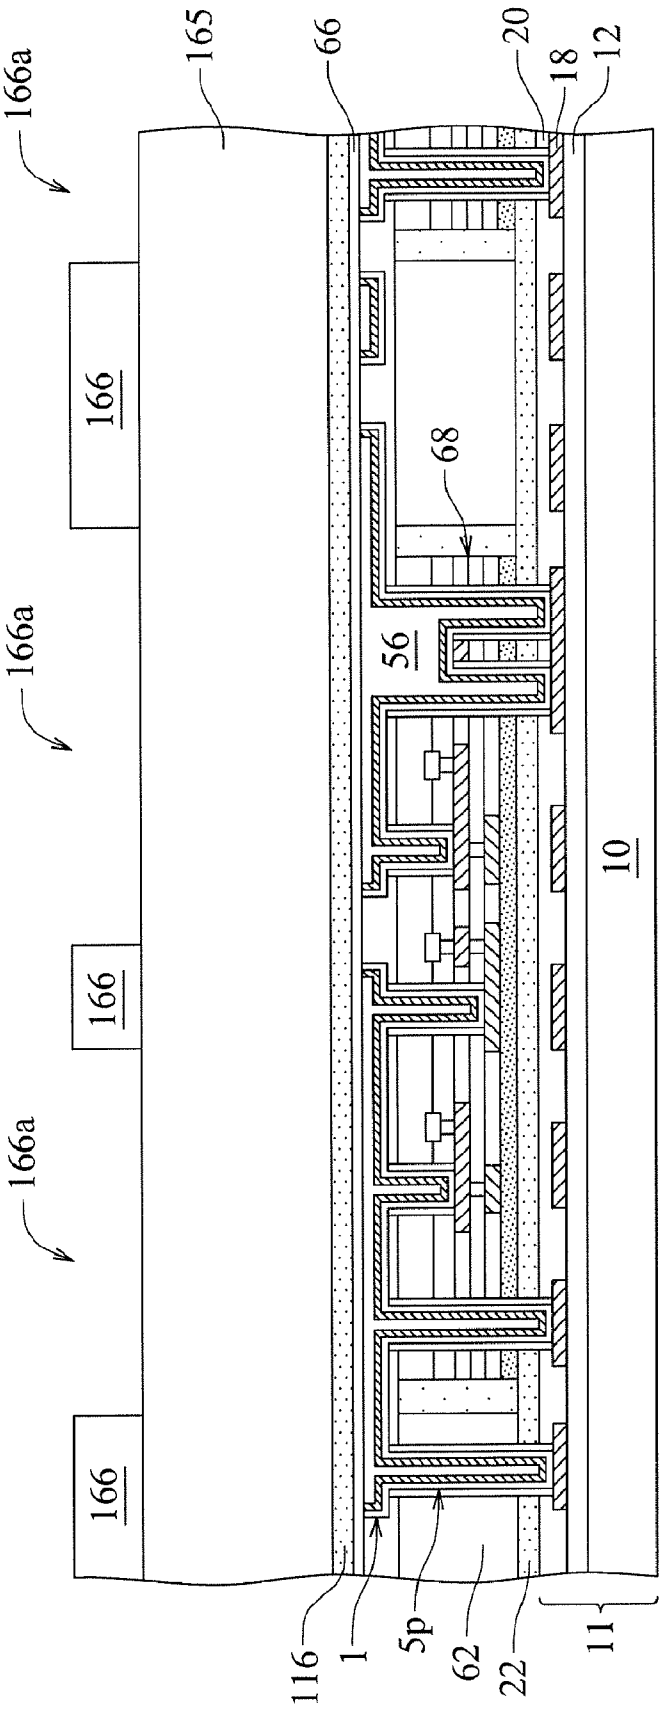

166a
165
66
20
18
12
166
68
166a
56
10
166
166a
166
116
1
5p
62
22
11

Fig. 29

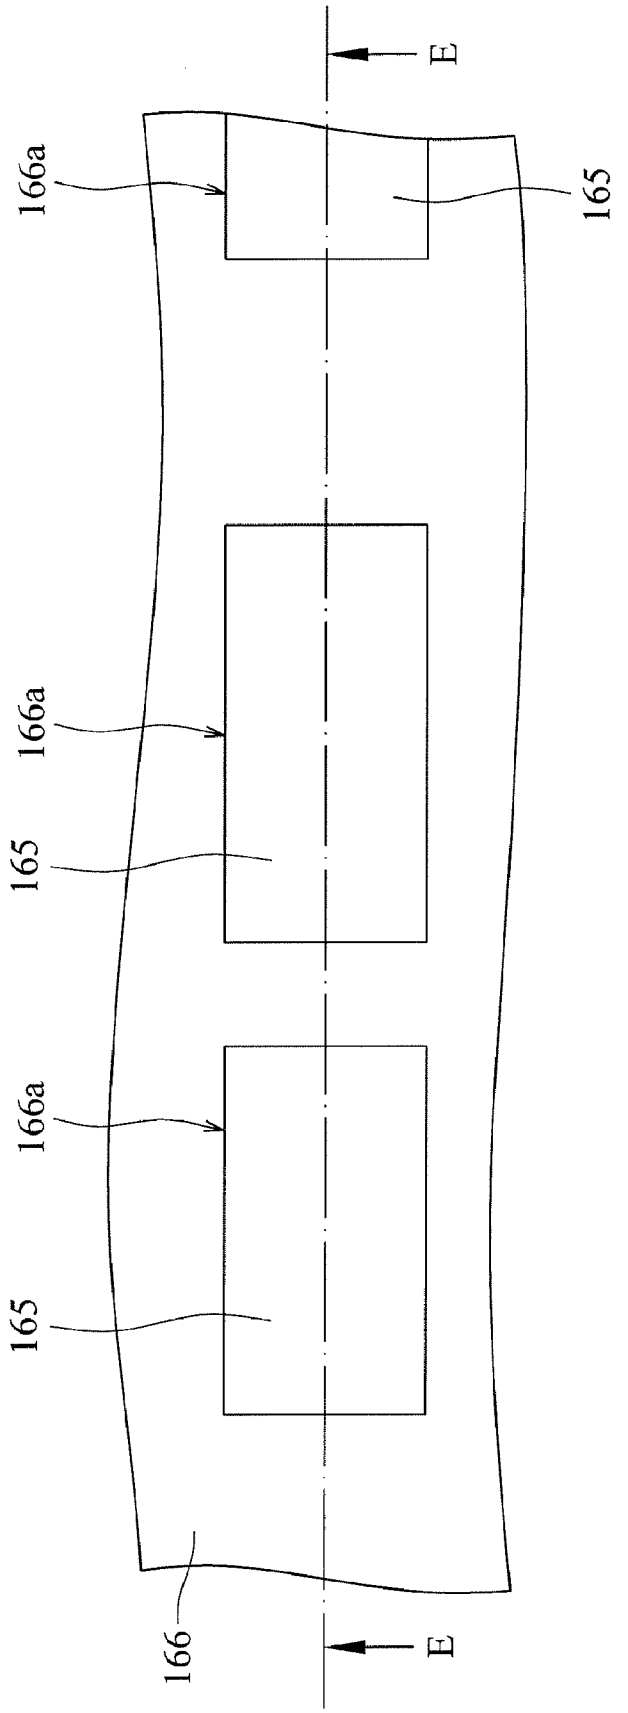


Fig. 30

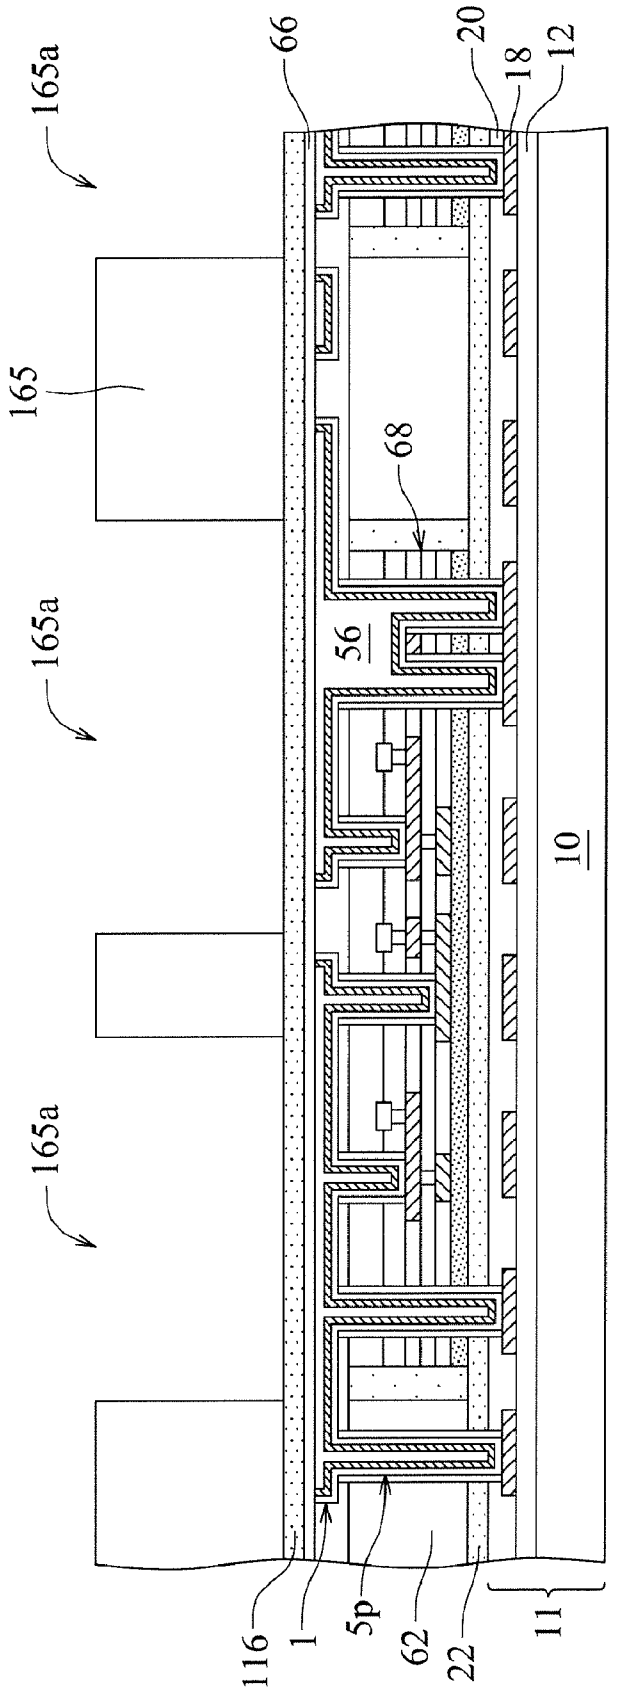


Fig. 31

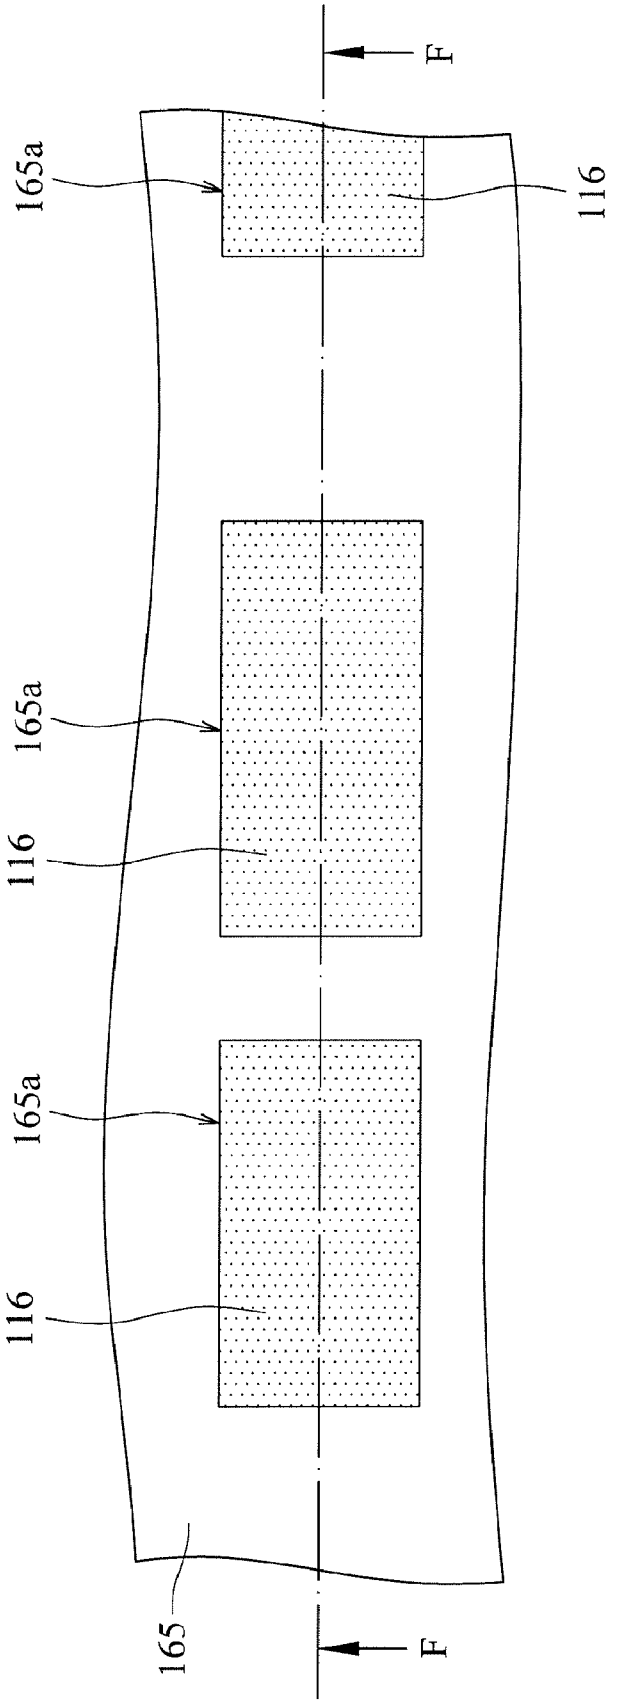


Fig. 32

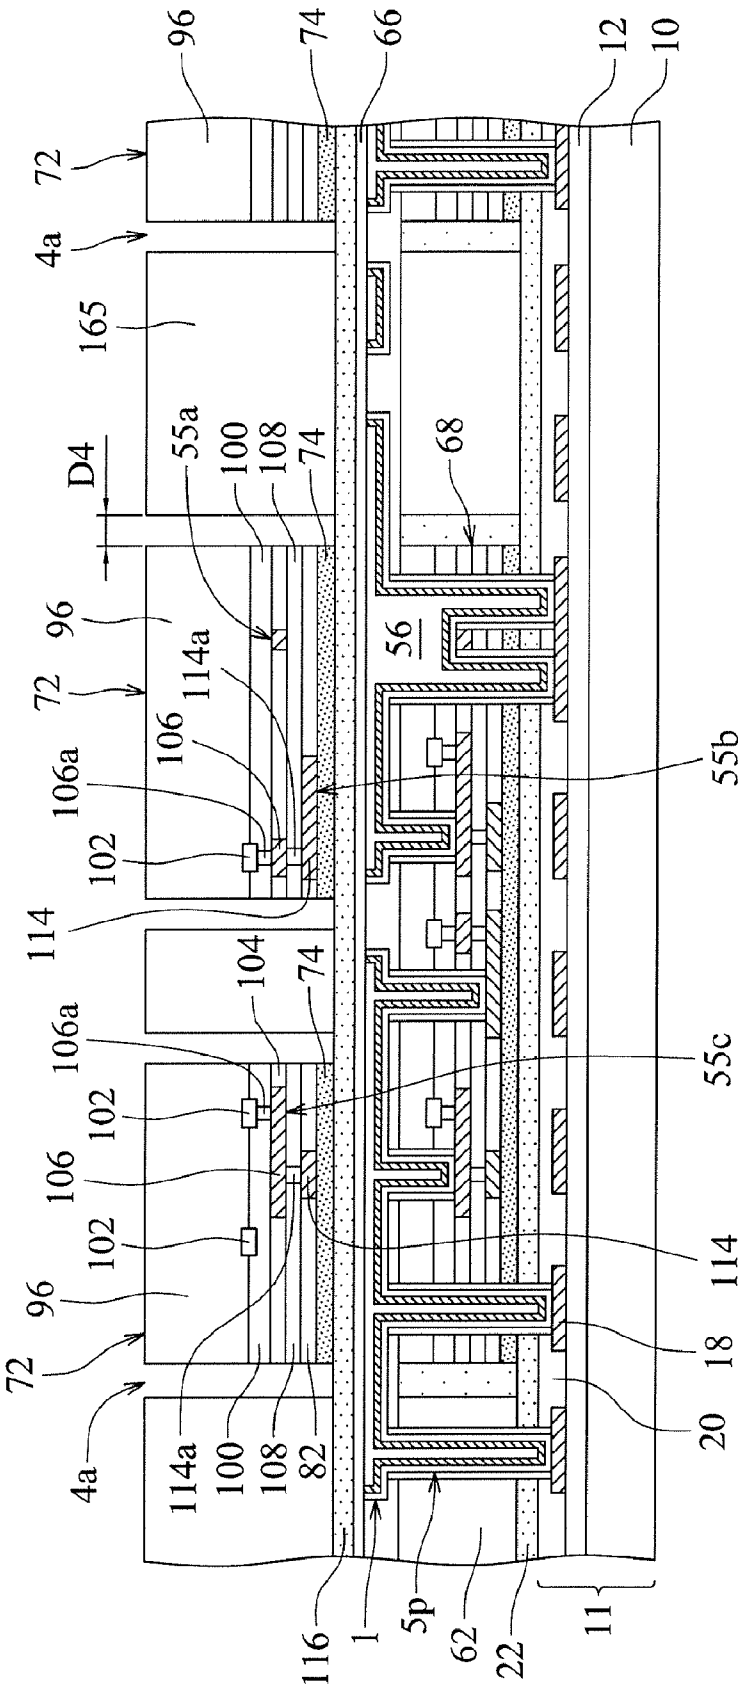

96
74
66
12
10
72
4a
165
D4
55a
100
108
74
68
96
72
114a
56
106
106a
102
55b
114
104
74
106a
55c
102
106
102
114
96
72
18
20
4a
114a
100
108
82
116
1
5p
62
22
11

Fig. 33

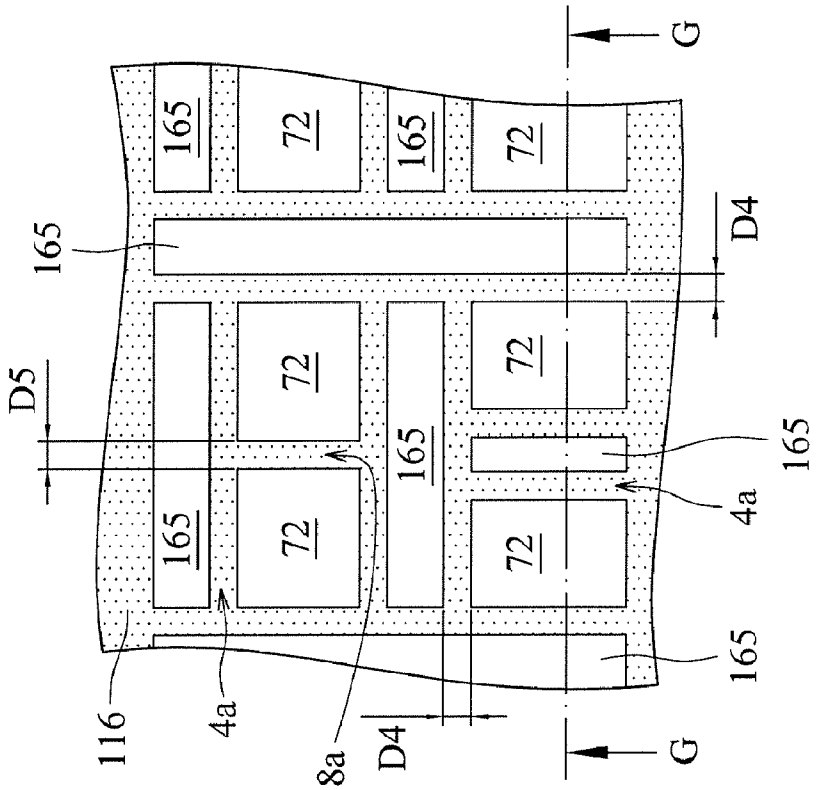

G
165
72
165
72
D4
165
D5
72
72
165
165
4a
165
165
72
72
116
4a
8a
D4
G

Fig. 35

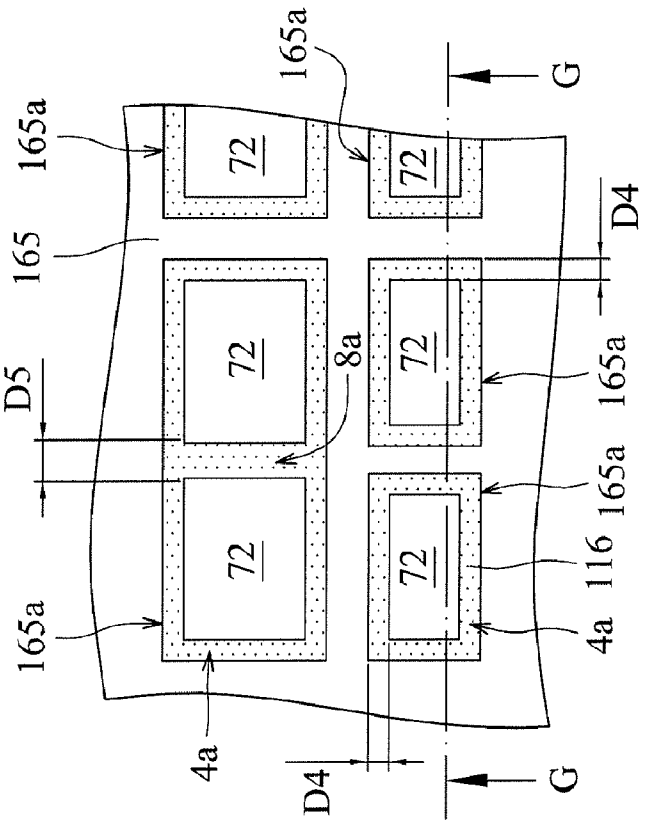

165a
G
165a
72
72
D4
165
72
72
D5
8a
165a
165a
72
72
116
165a
4a
4a
D4
G

Fig. 34

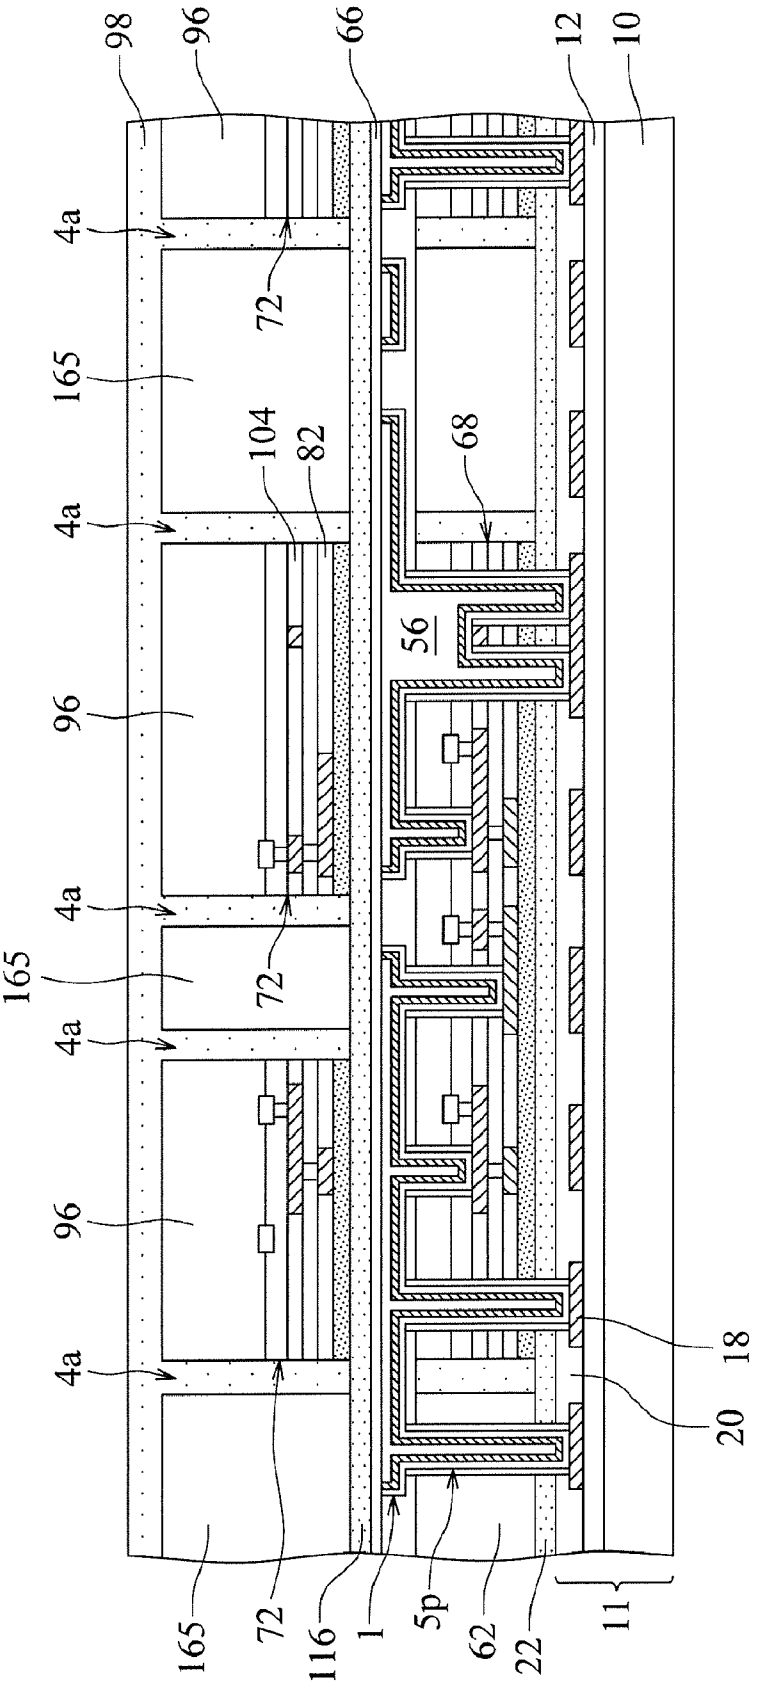

98
96
66
12
10
4a
72
165
104
82
68
4a
56
96
4a
72
165
4a
96
4a
18
20
165
72
116
1
5p
62
22
11

Fig. 36

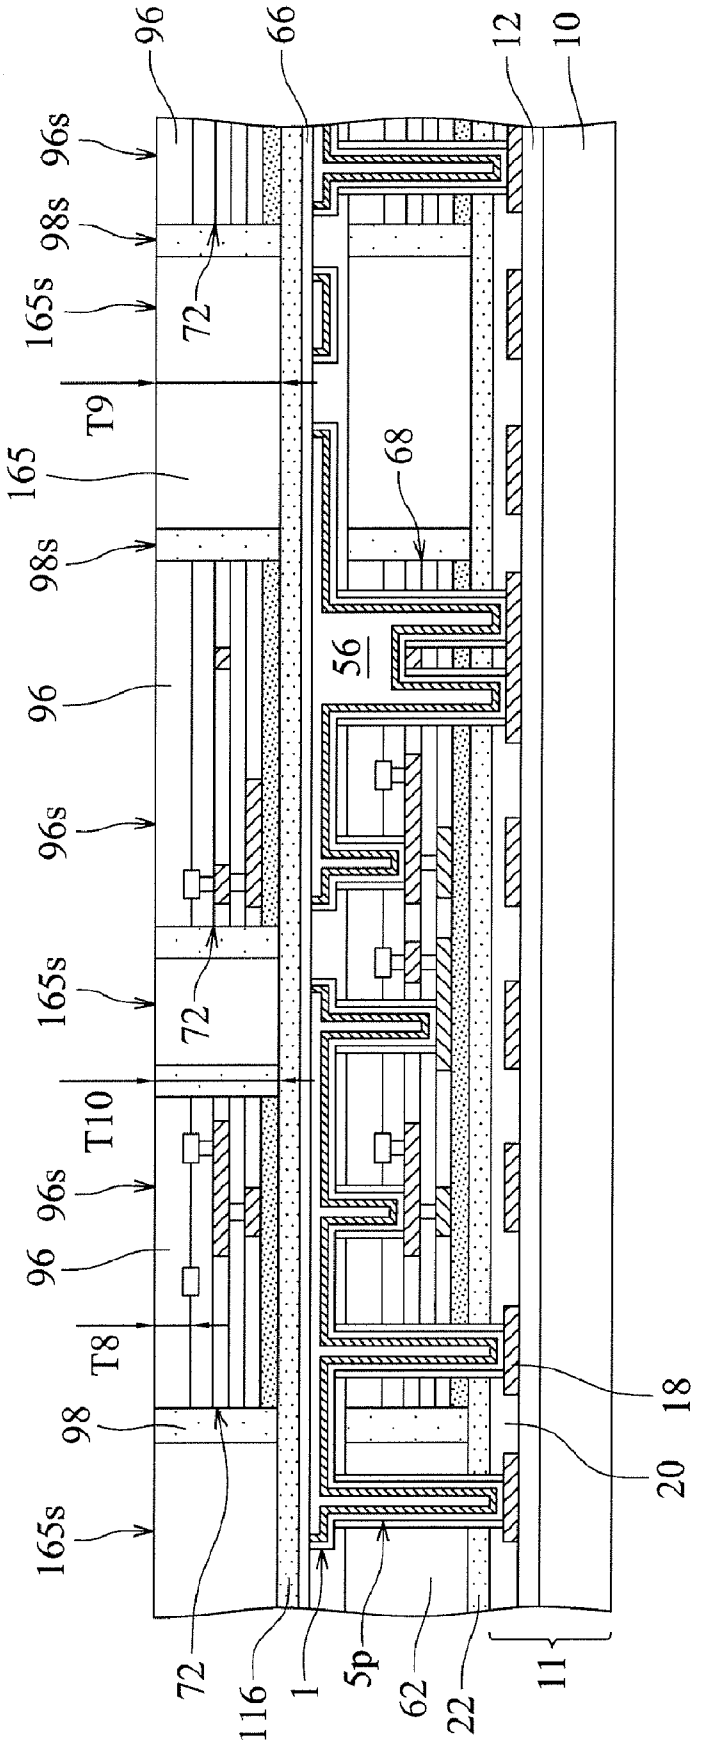

96
66
12
10
96s
98s
165s
72
T9
165
68
98s
56
96
96s
165s
72
T10
96s
96
T8
98
165s
18
20
72
116
1
5p
62
22
11

Fig. 37

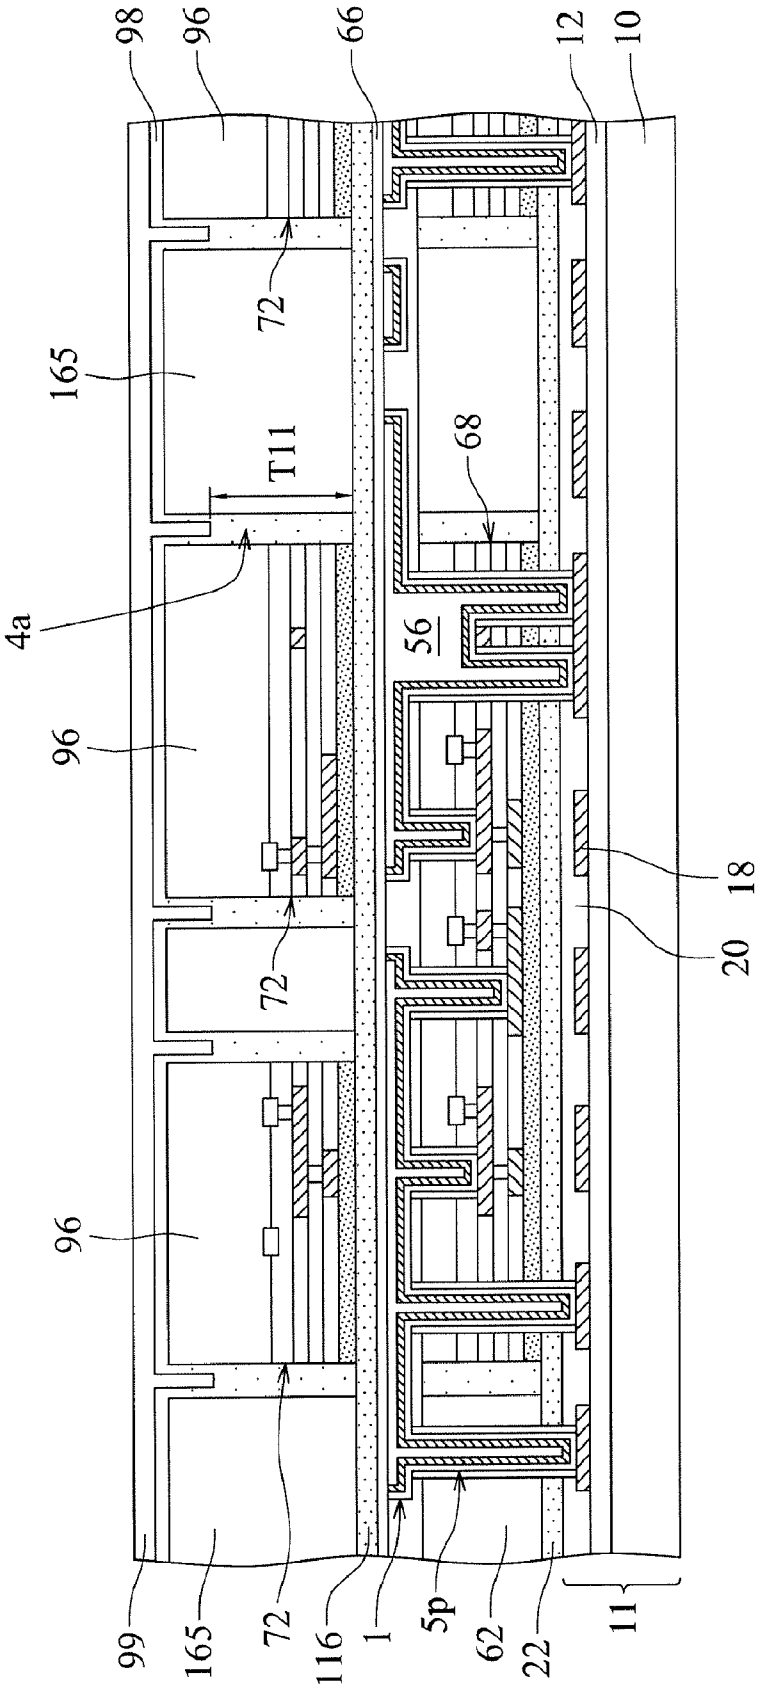

98
96
66
12
10
72
165
T11
68
4a
56
96
72
18
20
96
99
165
72
116
1
5p
62
22
11

Fig. 38

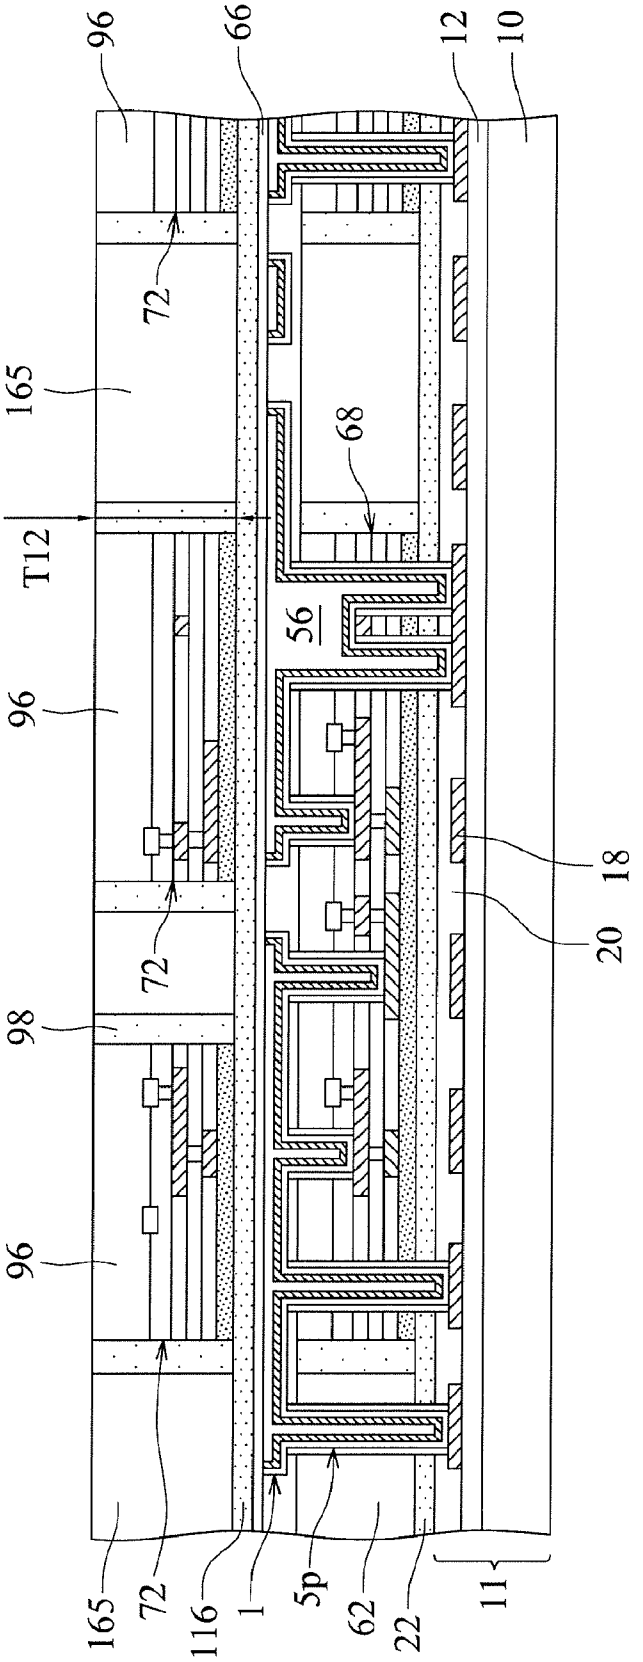


Fig. 39

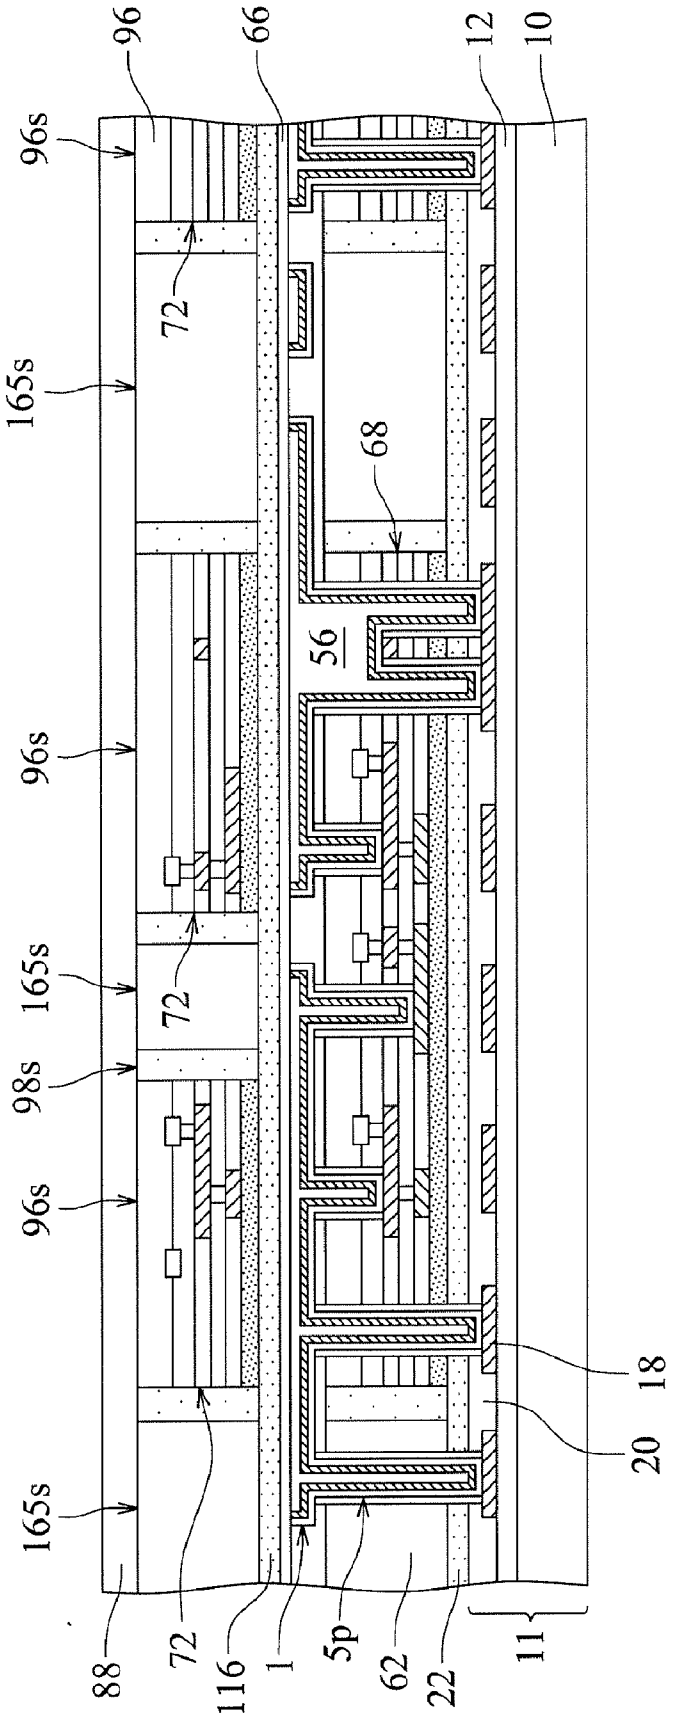

96
66
12
10
96s
72
165s
68
56
96s
165s
72
98s
96s
165s
18
20
88
72
116
1
5p
62
22
11

Fig. 40

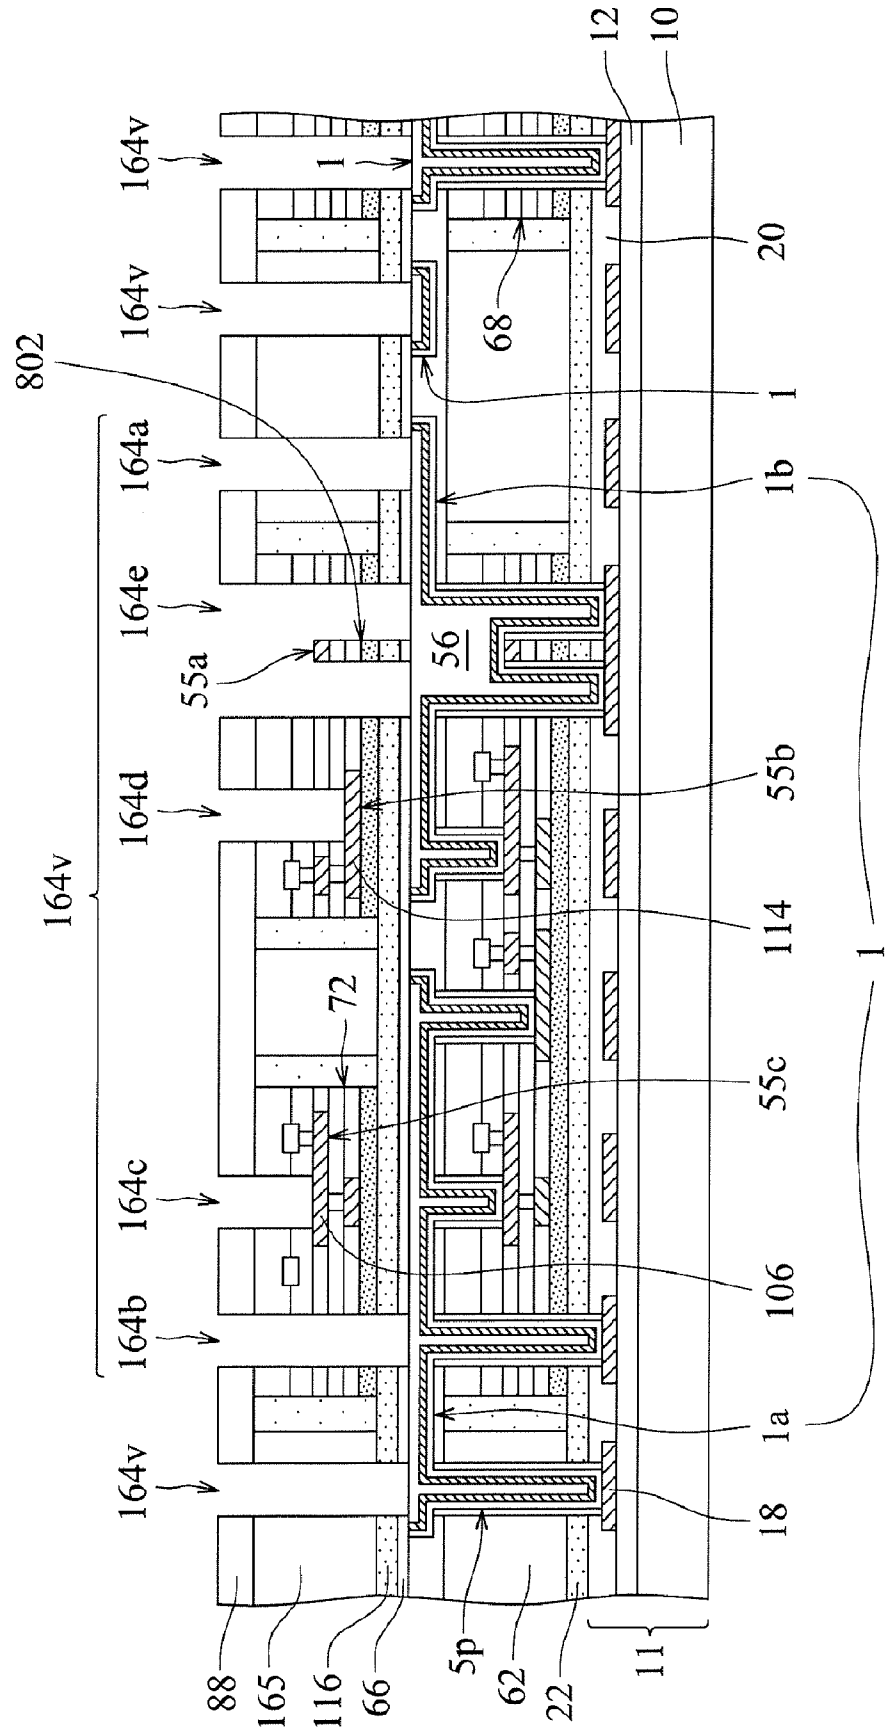

12
10
164v
1
20
68
802
1
164a
1b
164e
55a
56
164d
55b
164v
114
1
72
55c
164c
106
164b
1a
164v
18
88
165
116
66
5p
62
22
11

Fig. 41

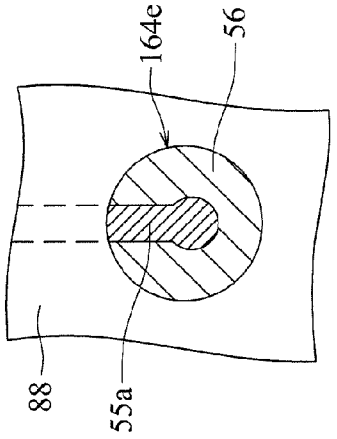


Fig. 44

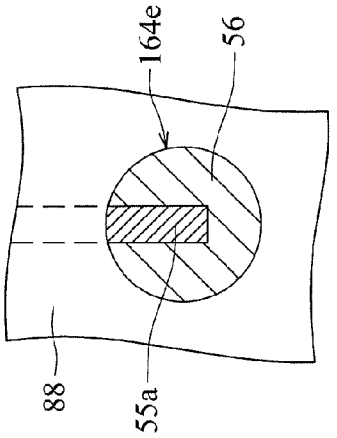


Fig. 43

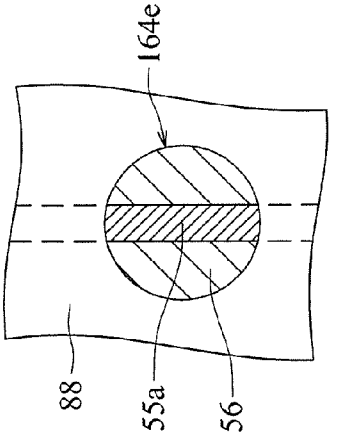


Fig. 42

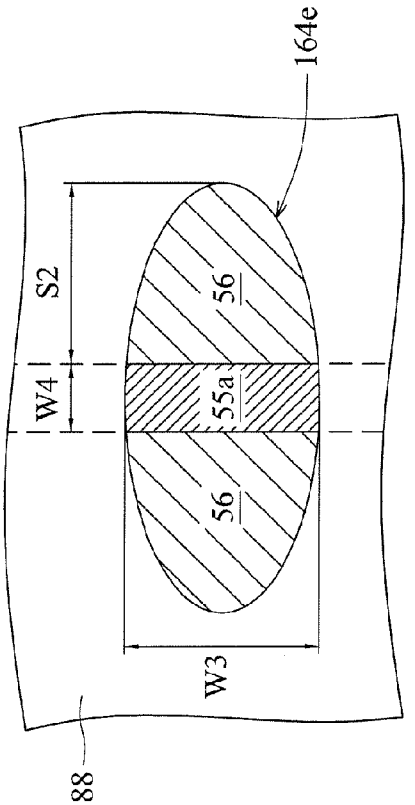


Fig. 42A

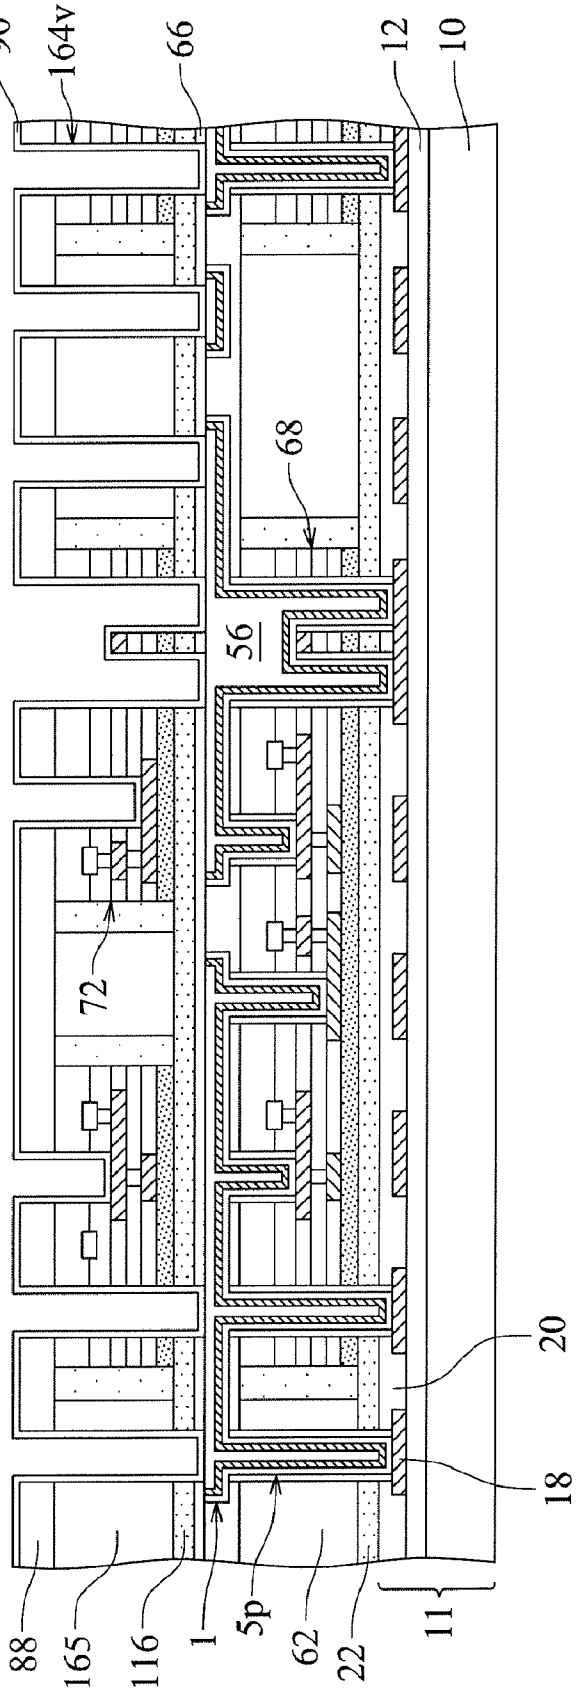


Fig. 45

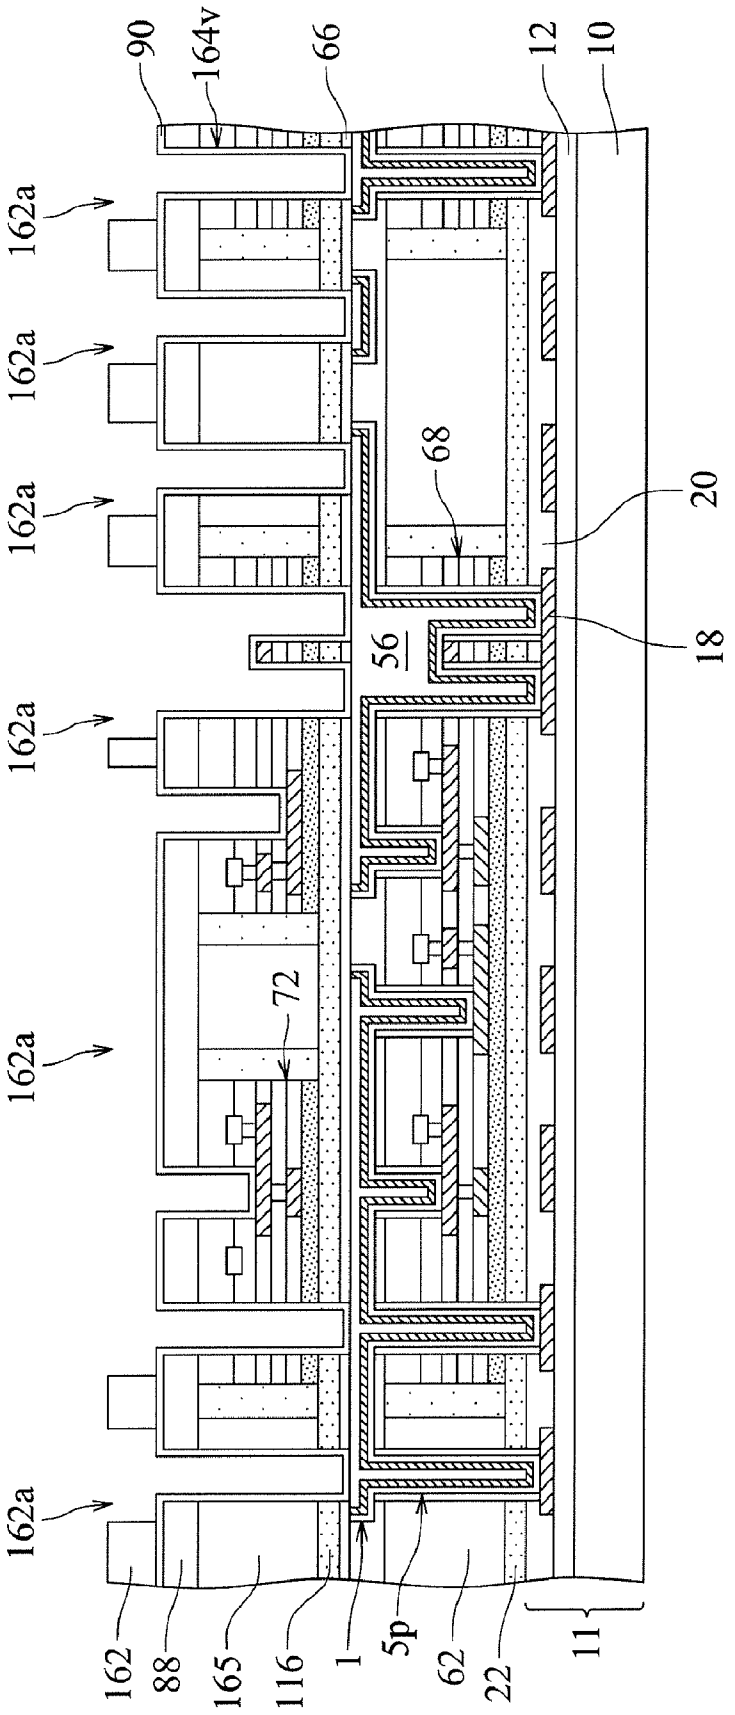

90
164v
66
12
10
162a
162a
162a
68
20
18
56
162a
72
162a
162a
162
88
165
116
1
5p
62
22
11

Fig. 46

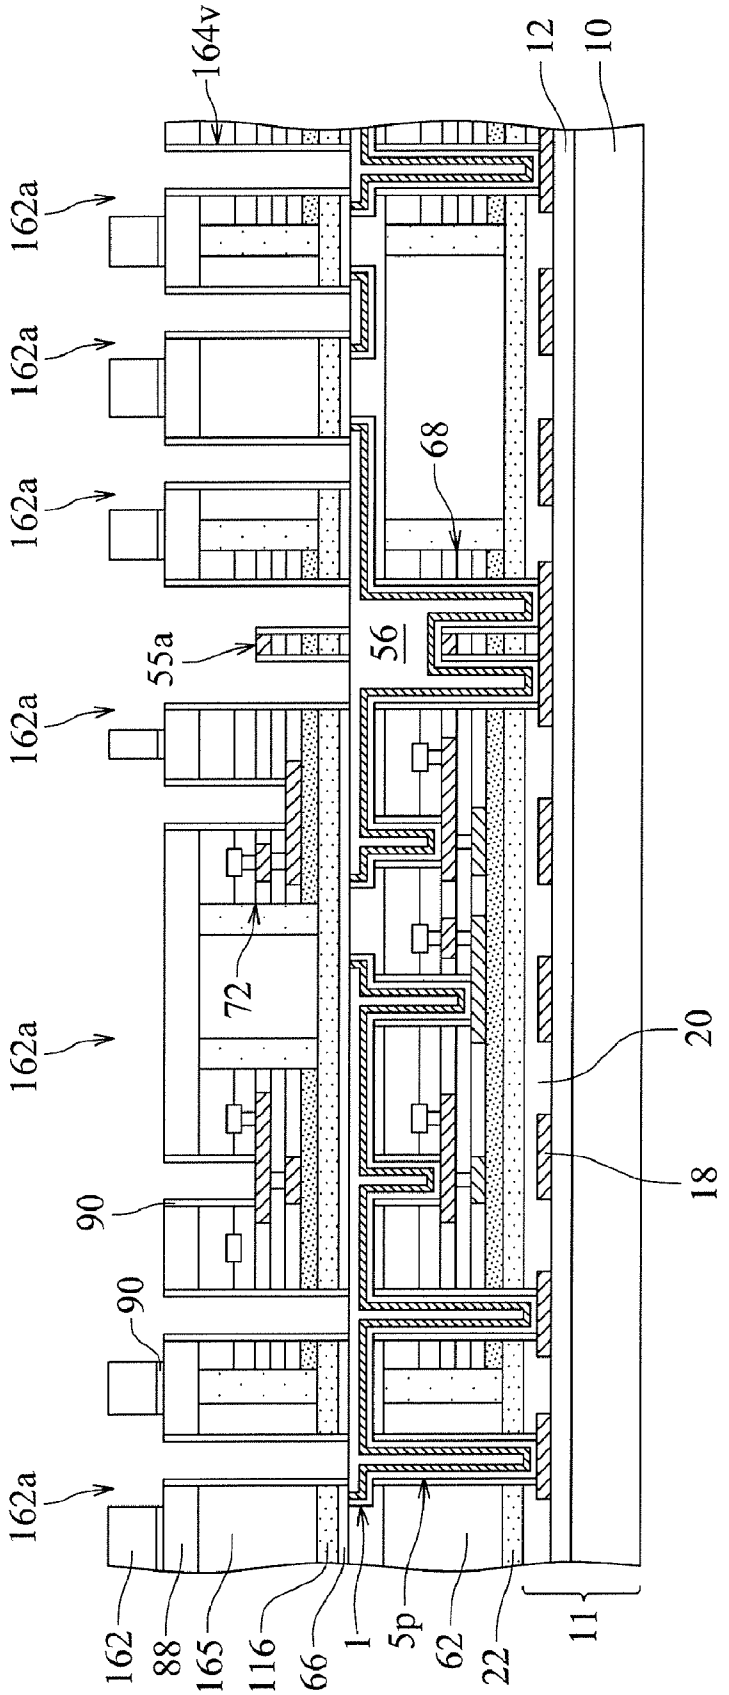

164v
12
10
162a
162a
162a
68
55a
56
162a
72
162a
20
18
90
90
162a
162
88
165
116
66
1
5p
62
22
11

Fig. 47

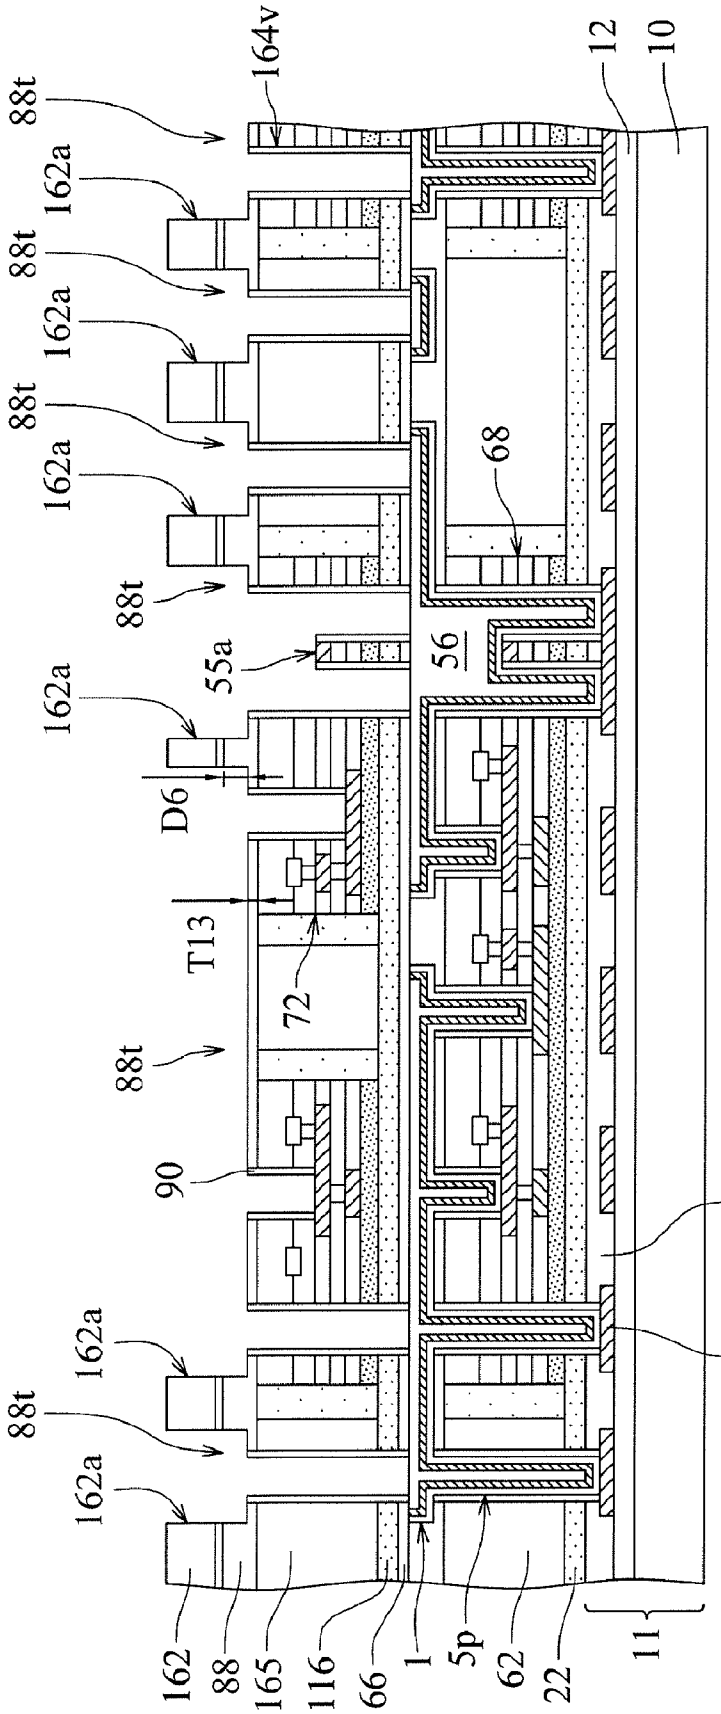

164v
12
10
88t
162a
88t
162a
88t
162a
88t
162a
88t
68
56
55a
162a
D6
T13
72
88t
90
20
18
162a
88t
162a
162
88
165
116
66
1
5p
62
22
11

Fig. 48

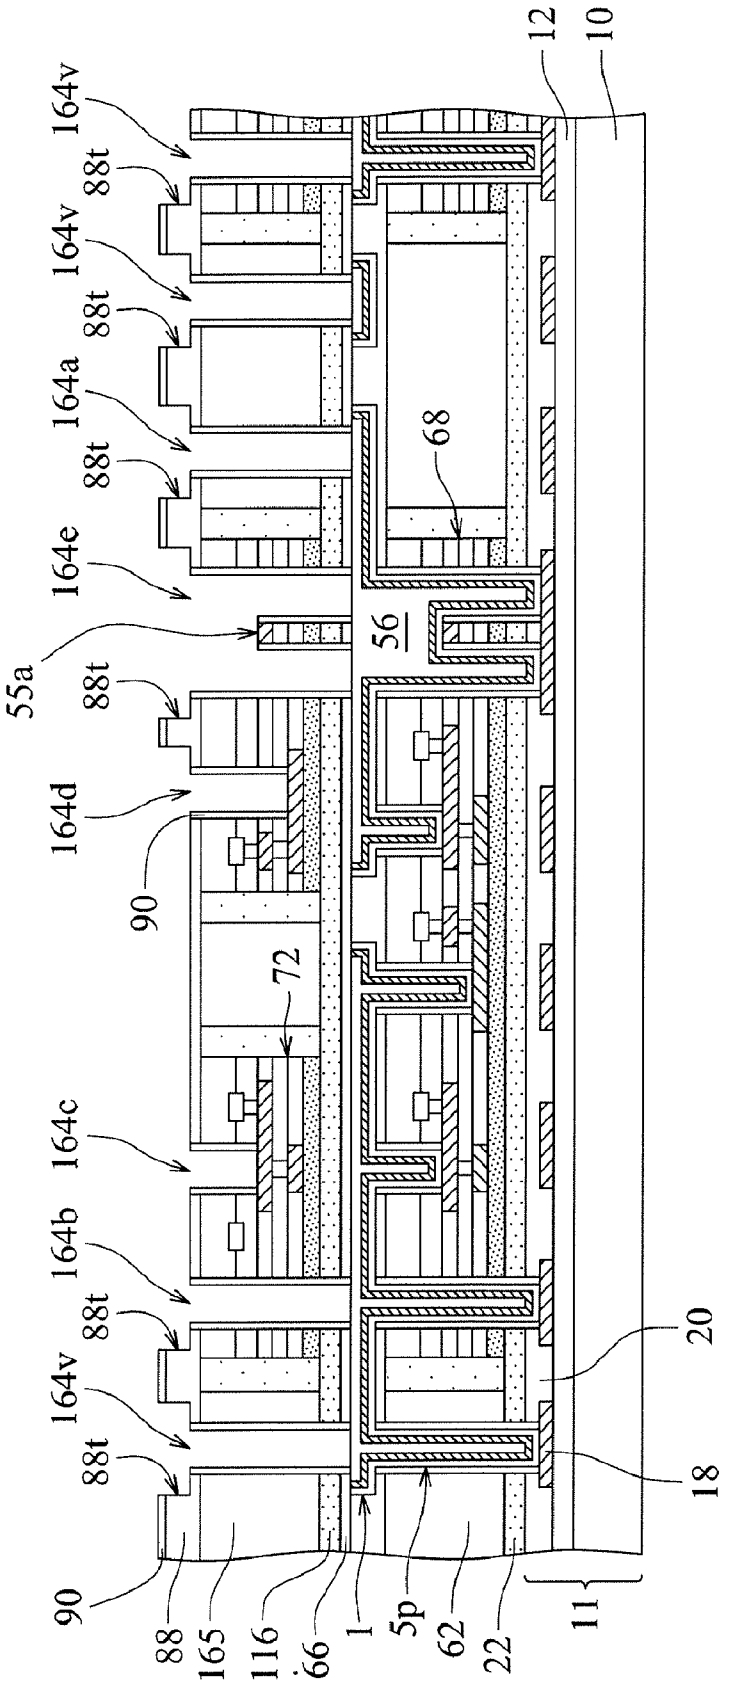

12
10
164v
88t
164v
88t
164a
88t
164e
68
56
55a
88t
164d
90
72
164c
164b
88t
164v
88t
90
88
165
116
66
1
5p
62
22
11
18
20

Fig. 49

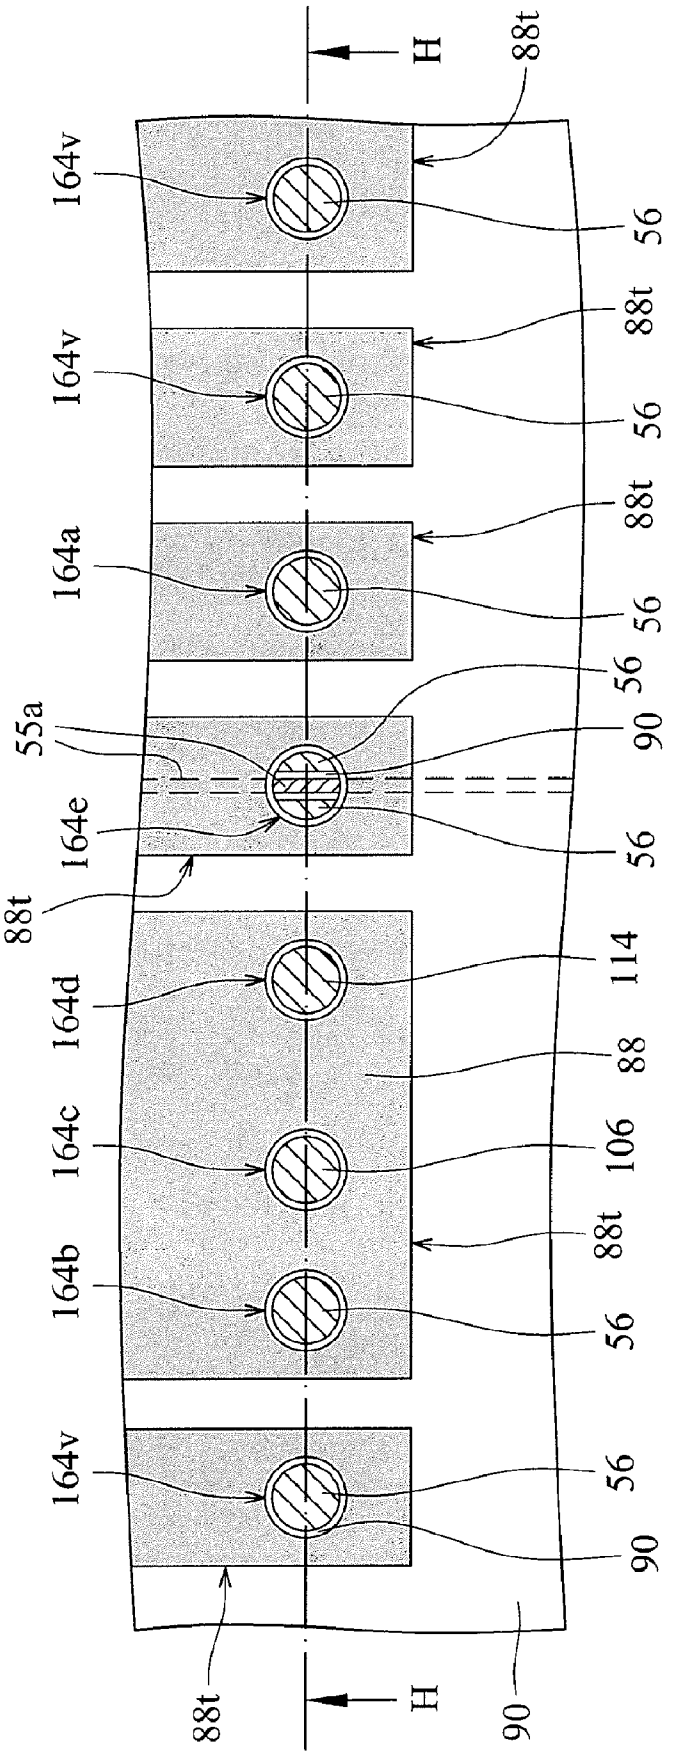

H
88t
164v
56
164v
88t
56
164a
88t
56
55a
56
90
164e
56
88t
164d
114
88
164c
106
164b
88t
56
164v
56
90
88t
H
90

Fig. 50

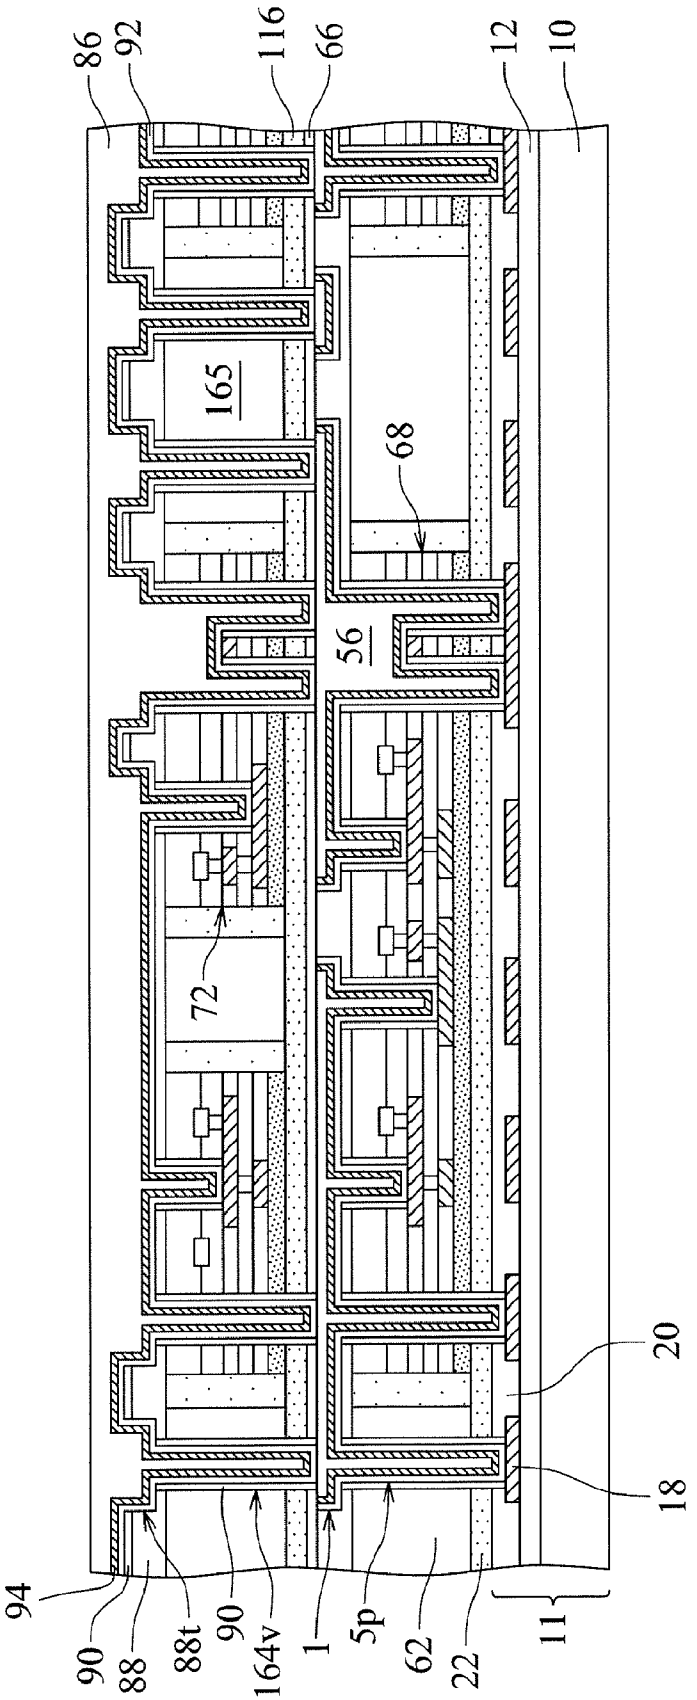

86
92
116
66
12
10
165
68
56
72
20
18
94
90
88
88t
90
164v
1
5p
62
22
11

Fig. 51

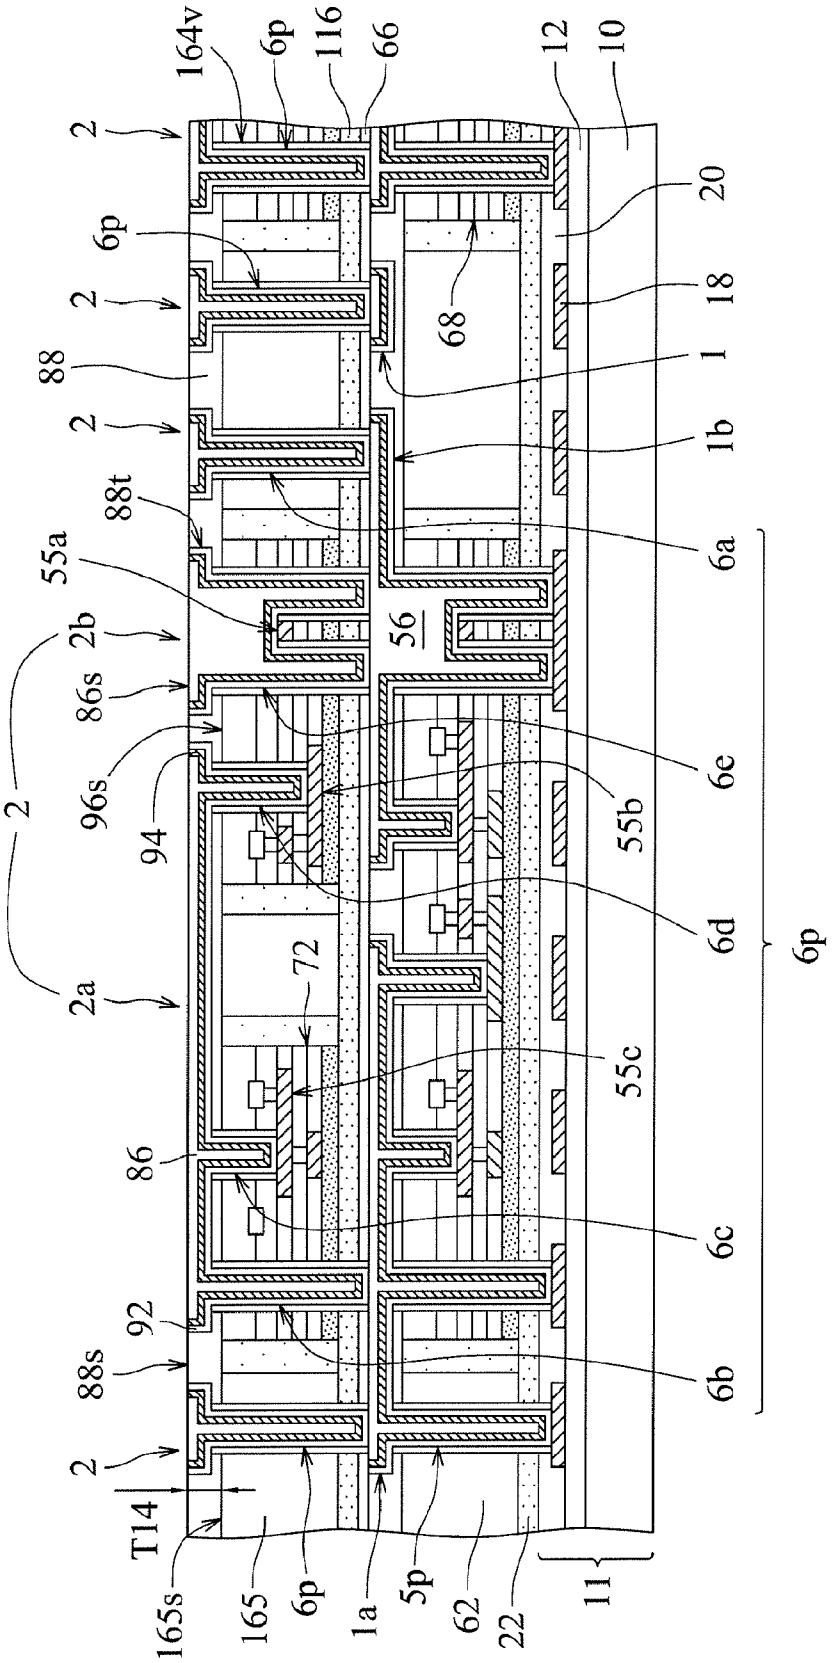

164v
6p
116
66
12
10
2
20
68
18
88
1
1b
88t
6a
55a
56
2b
86s
96s
94
6e
55b
6d
6p
2
2a
72
55c
86
6c
92
88s
6b
T14
165s
165
6p
1a
5p
62
22
11

Fig. 52

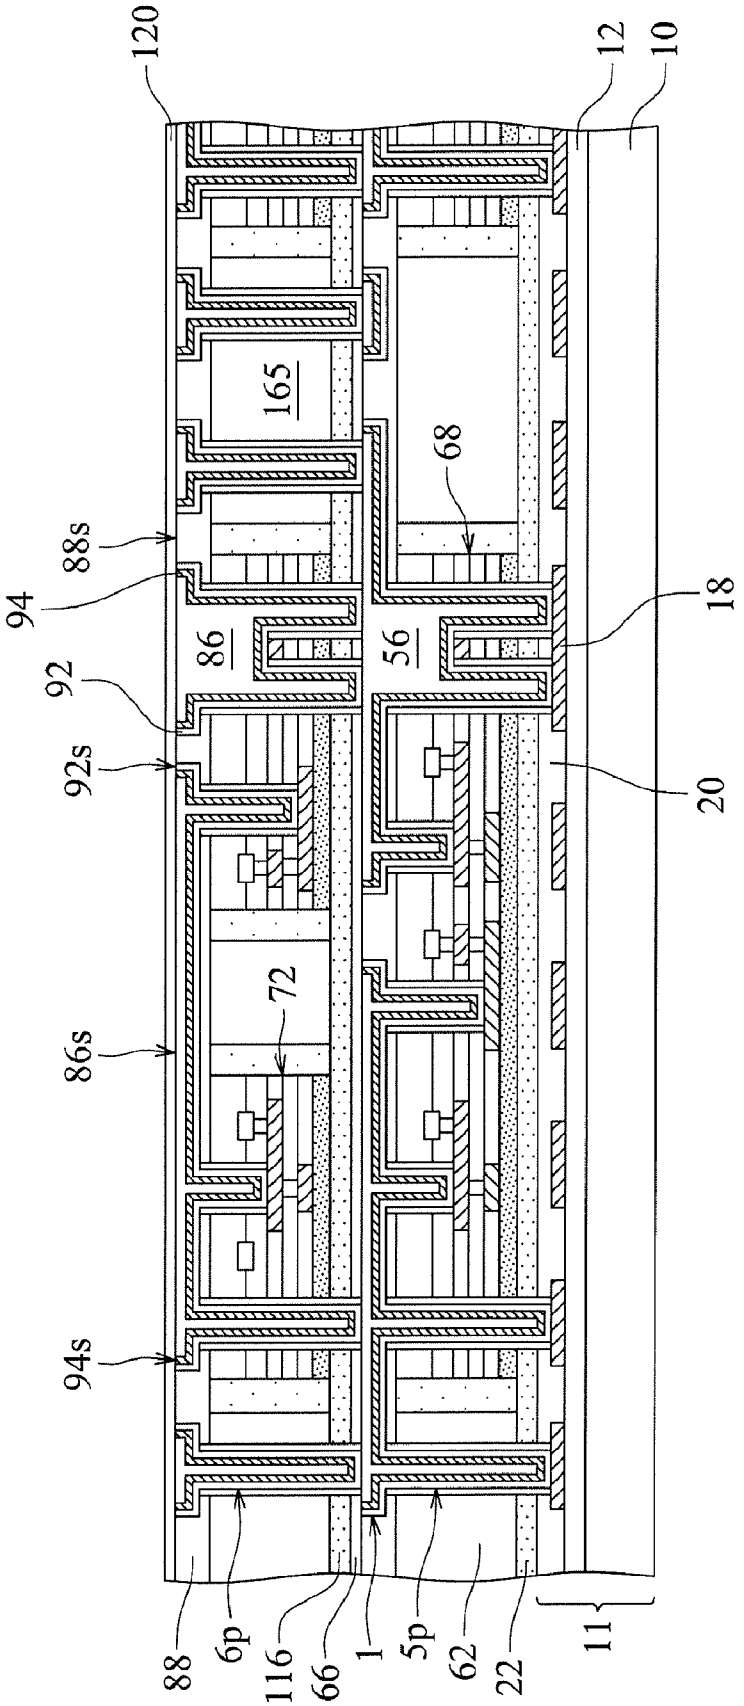

120
12
10
165
68
88s
94
86
56
18
92
92s
20
72
86s
94s
88
6p
116
66
1
5p
62
22
11

Fig. 53

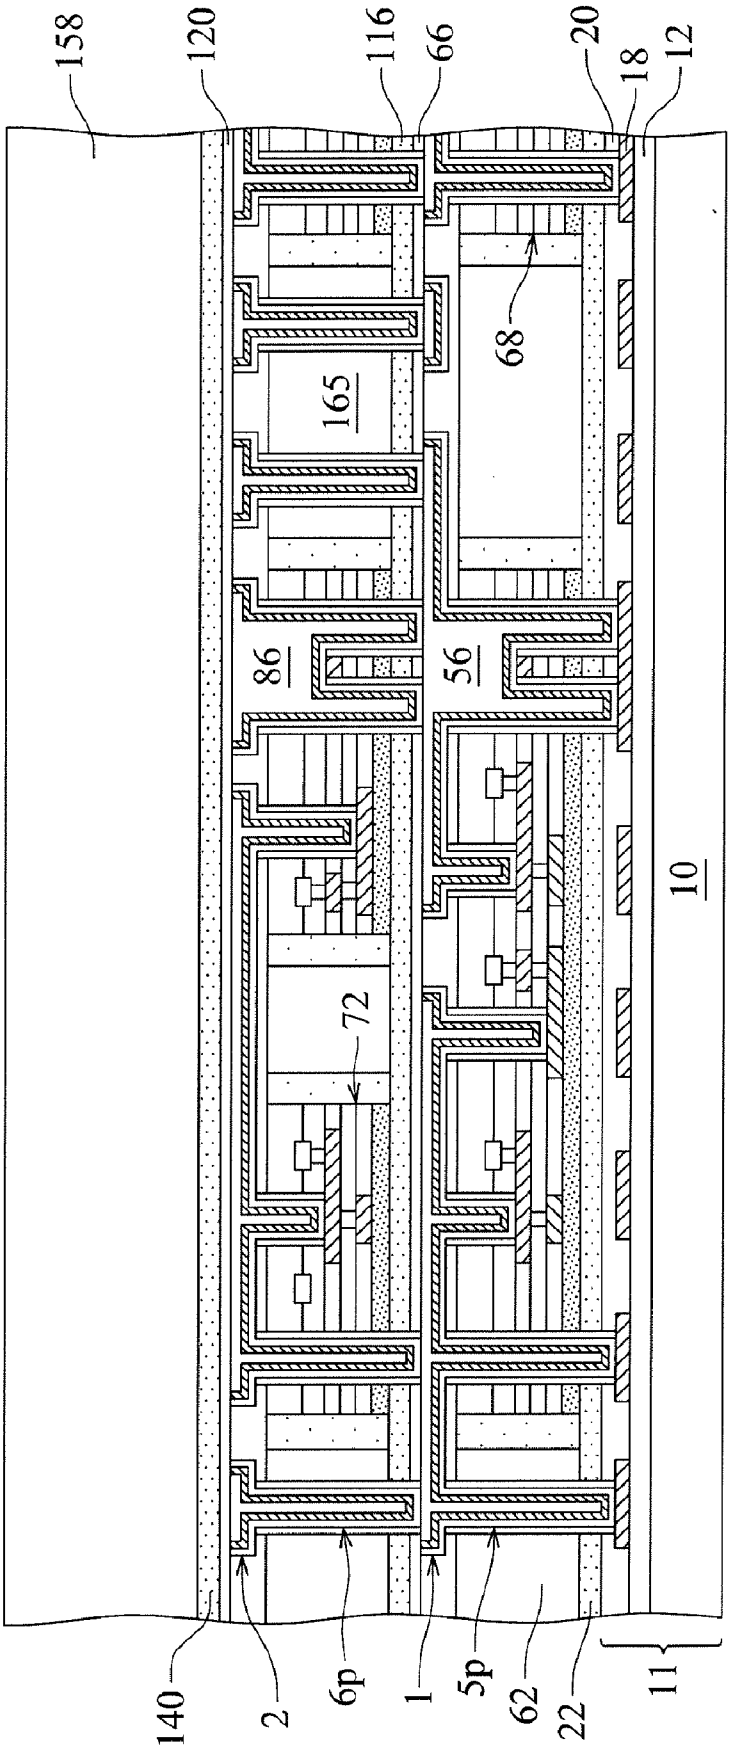


Fig. 54

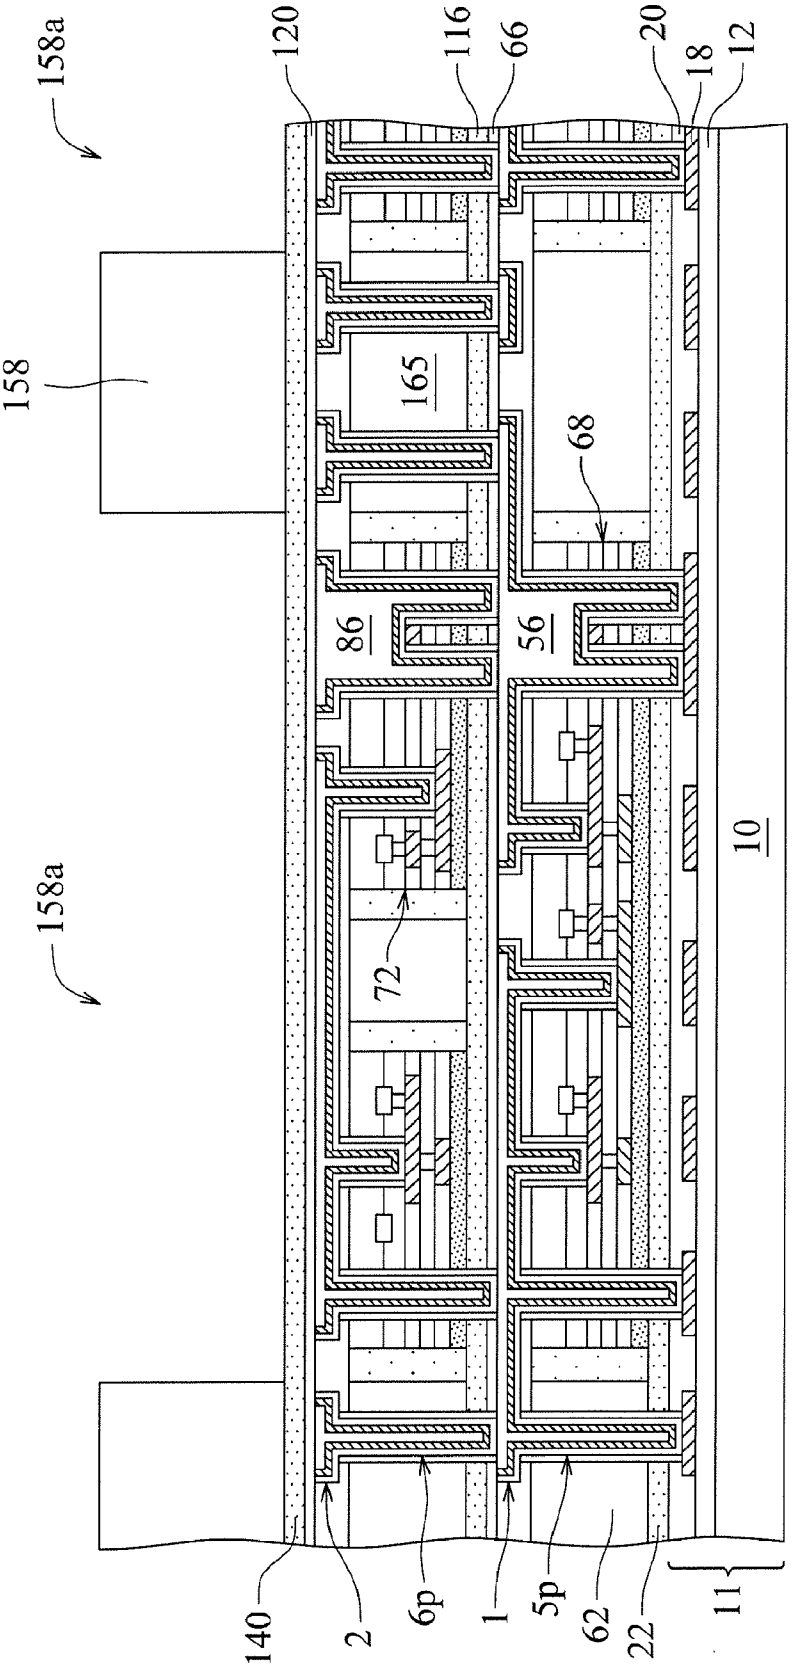

158a
120
116
66
20
18
12
158
165
68
86
56
158a
72
10
140
2
6p
1
5p
62
22
11

Fig. 55

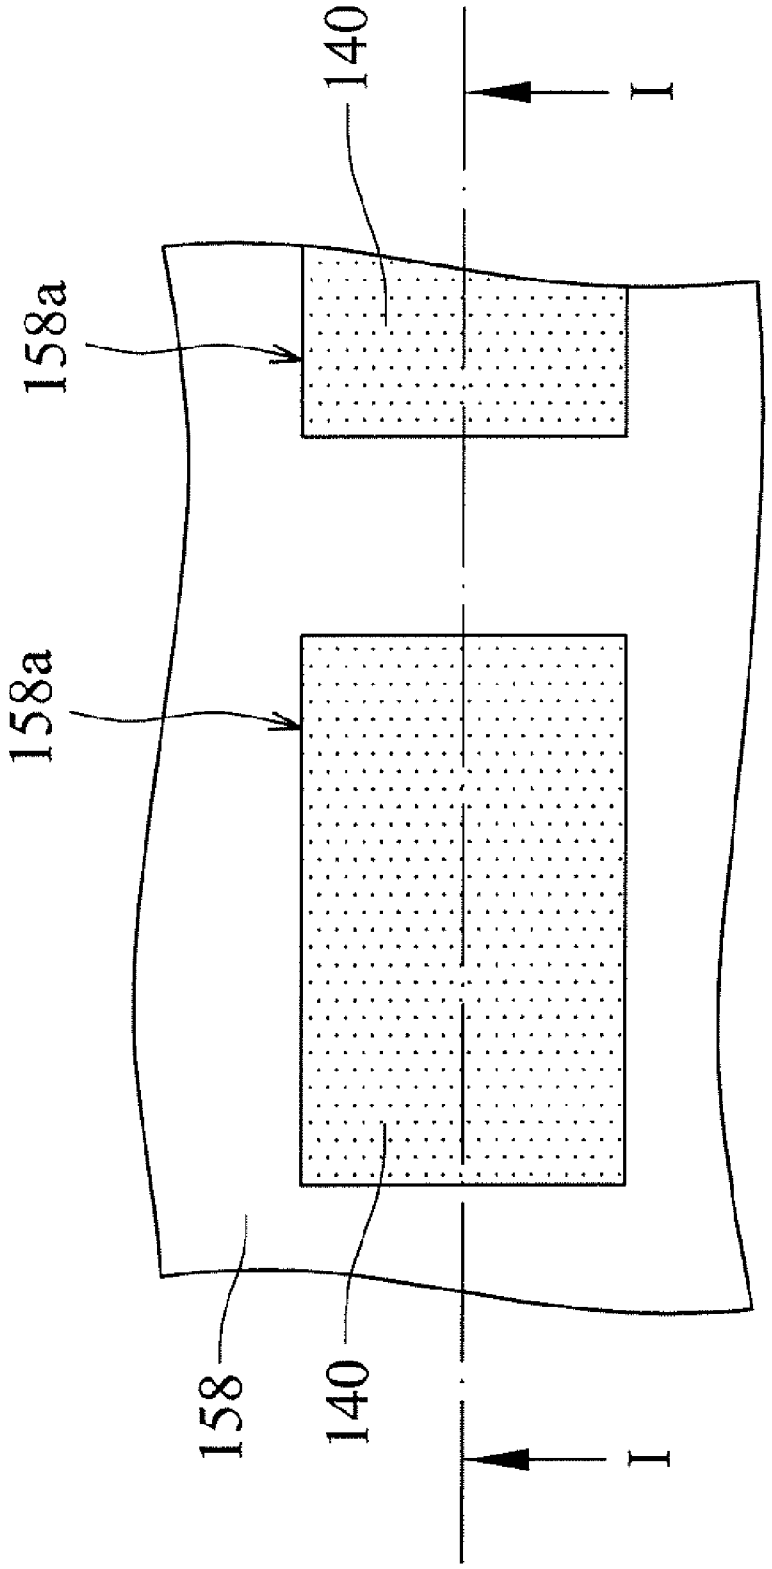


Fig. 56

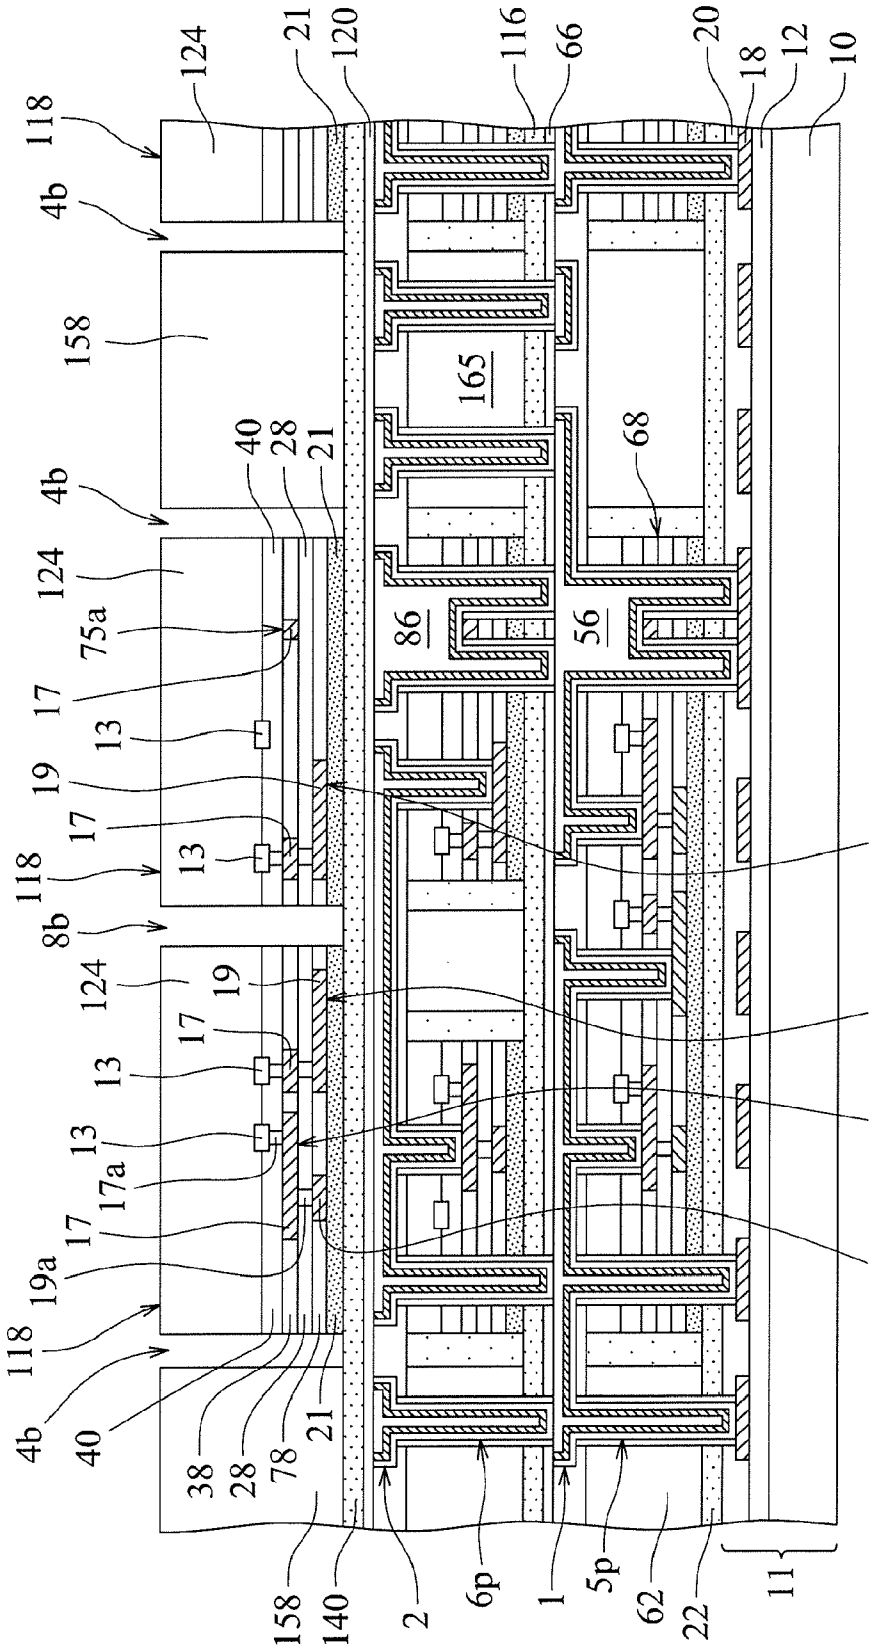

124
21
120
116
66
20
18
12
10
118
4b
158
165
40
28
21
68
124
75a
86
56
17
13
19
75b
118
8b
124
19
17
75c
13
13
17a
75d
17
19a
19
118
4b
40
38
28
78
21
158
140
2
6p
1
5p
62
22
11

Fig. 57

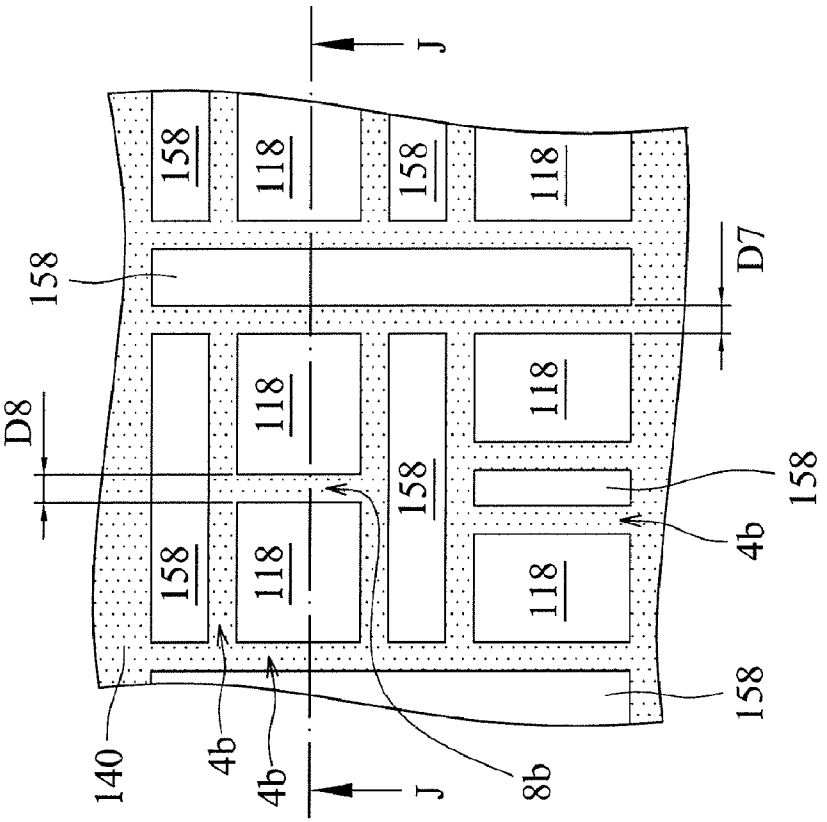

J
158
118
158
118
D7
158
D8
118
158
118
158
4b
158
118
158
140
4b
4b
J
8b

Fig. 59

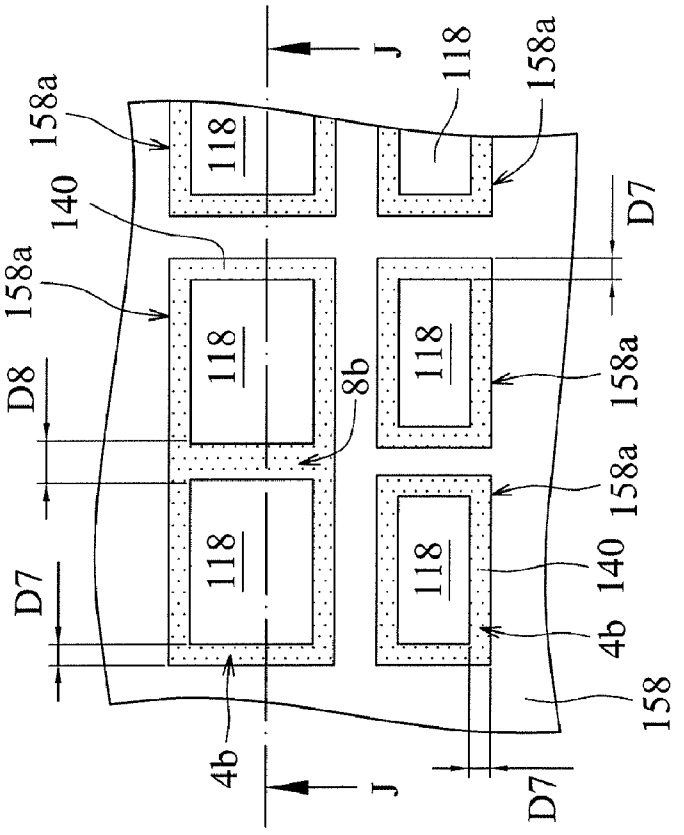

J
158a
118
158a
140
D7
158a
118
118
D8
8b
158a
158a
118
118
140
D7
4b
158
4b
J
D7

Fig. 58

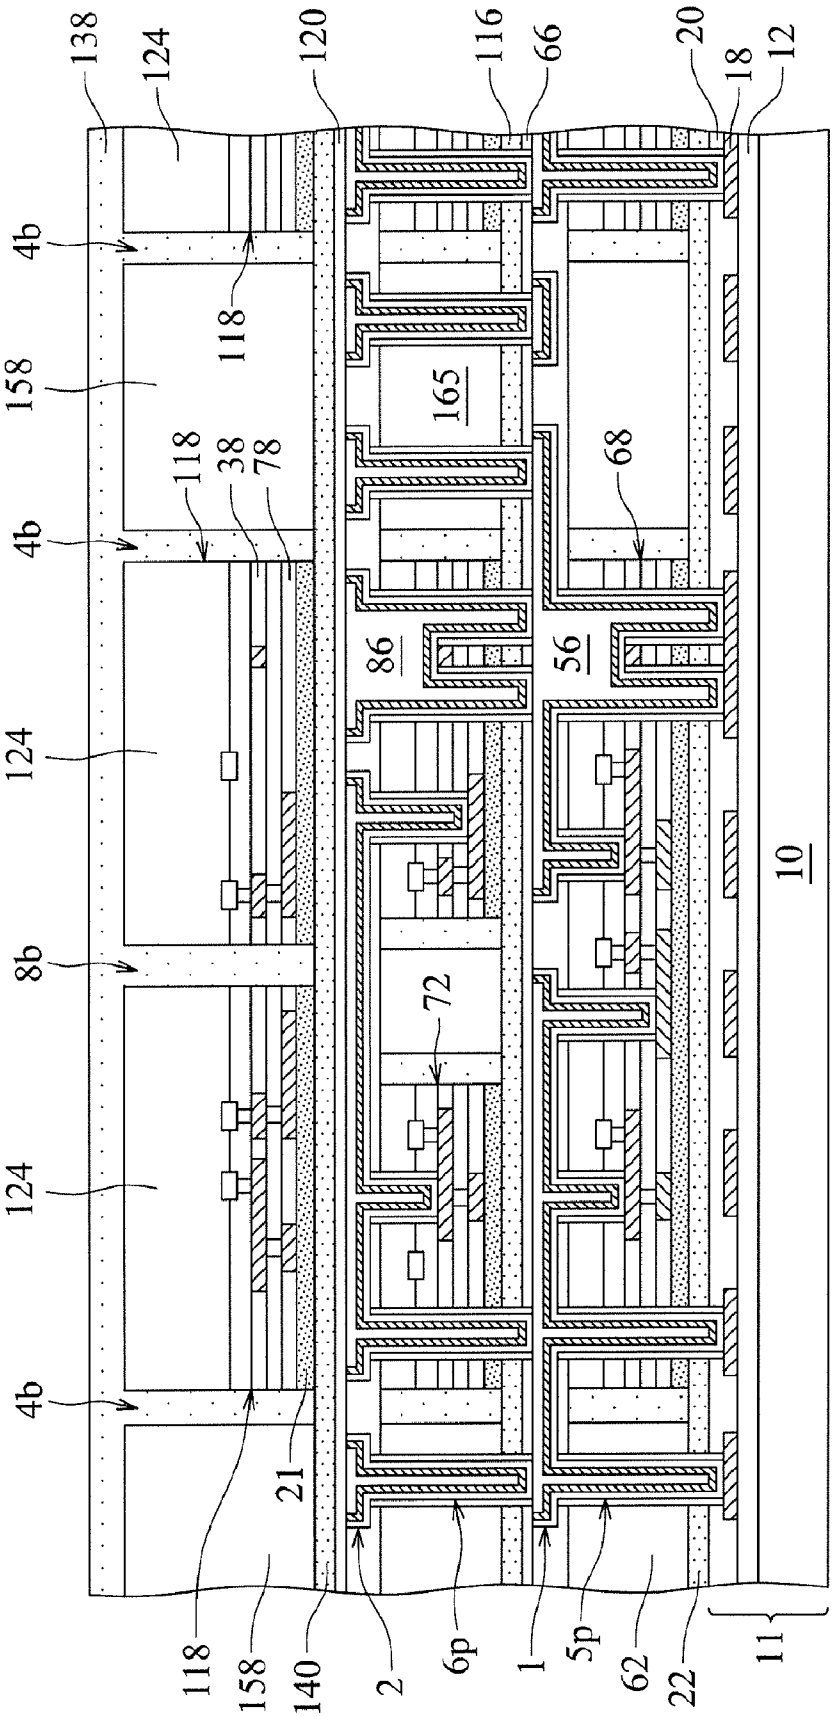

138
124
120
116
66
20
18
12
4b
118
158
165
118
38
78
68
4b
86
56
124
10
8b
72
124
4b
21
118
158
140
2
6p
1
5p
62
22
11

Fig. 60

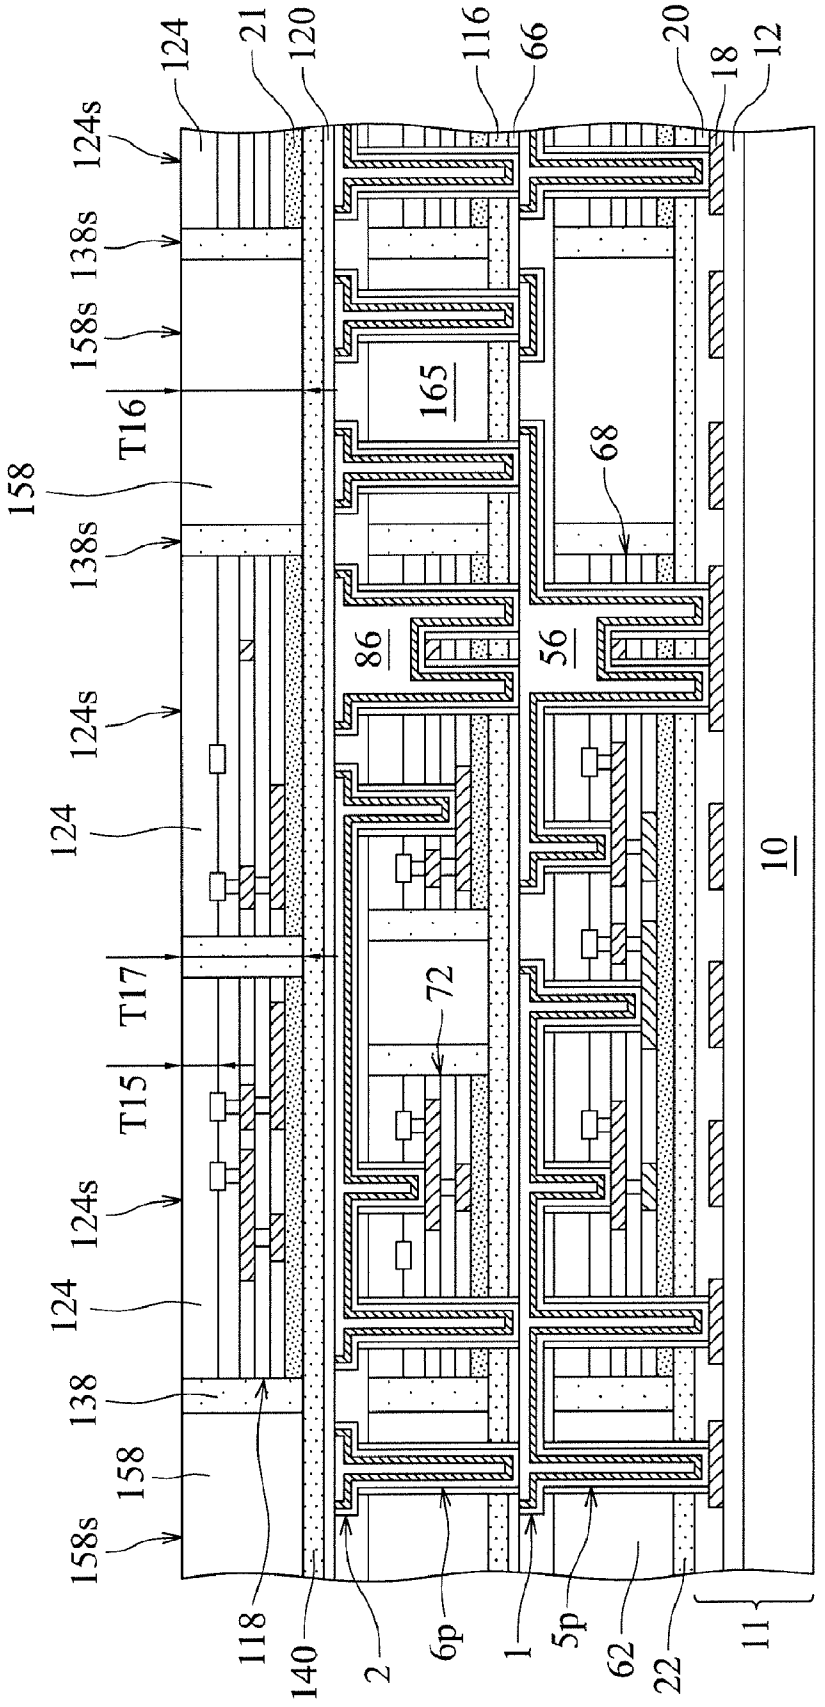

124
21
120
116
66
20
18
12
124s
138s
158s
T16
158
165
68
86
56
10
T17
72
T15
138
118
140
2
6p
1
5p
62
22
11

Fig. 61

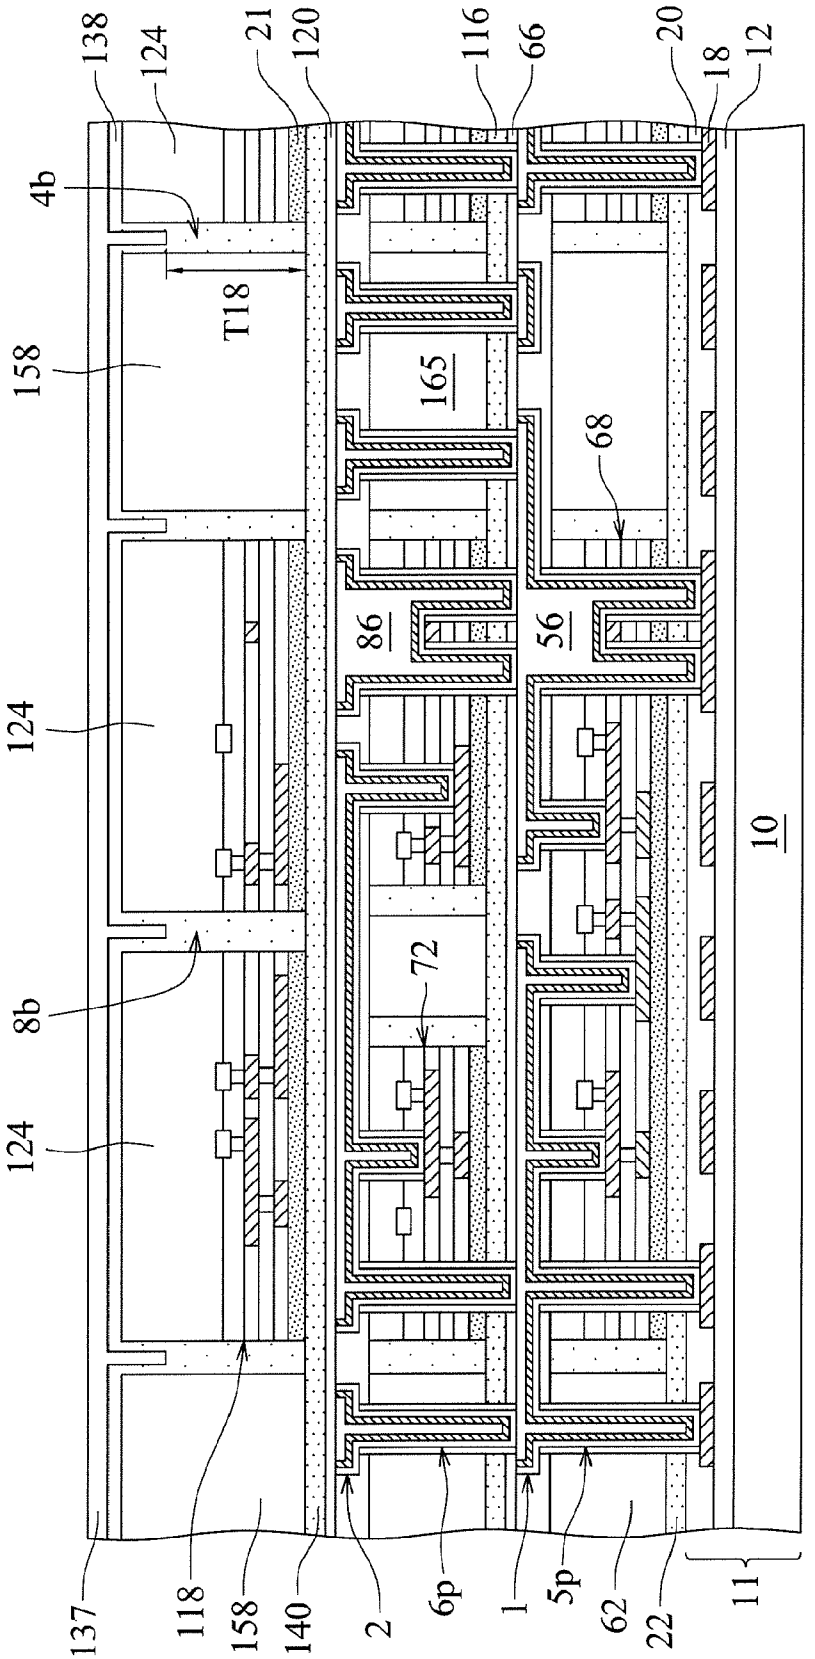

138
124
21
120
116
66
20
18
12
4b
T18
158
165
68
86
56
124
10
72
8b
124
137
118
158
140
2
6p
1
5p
62
22
11

Fig. 62

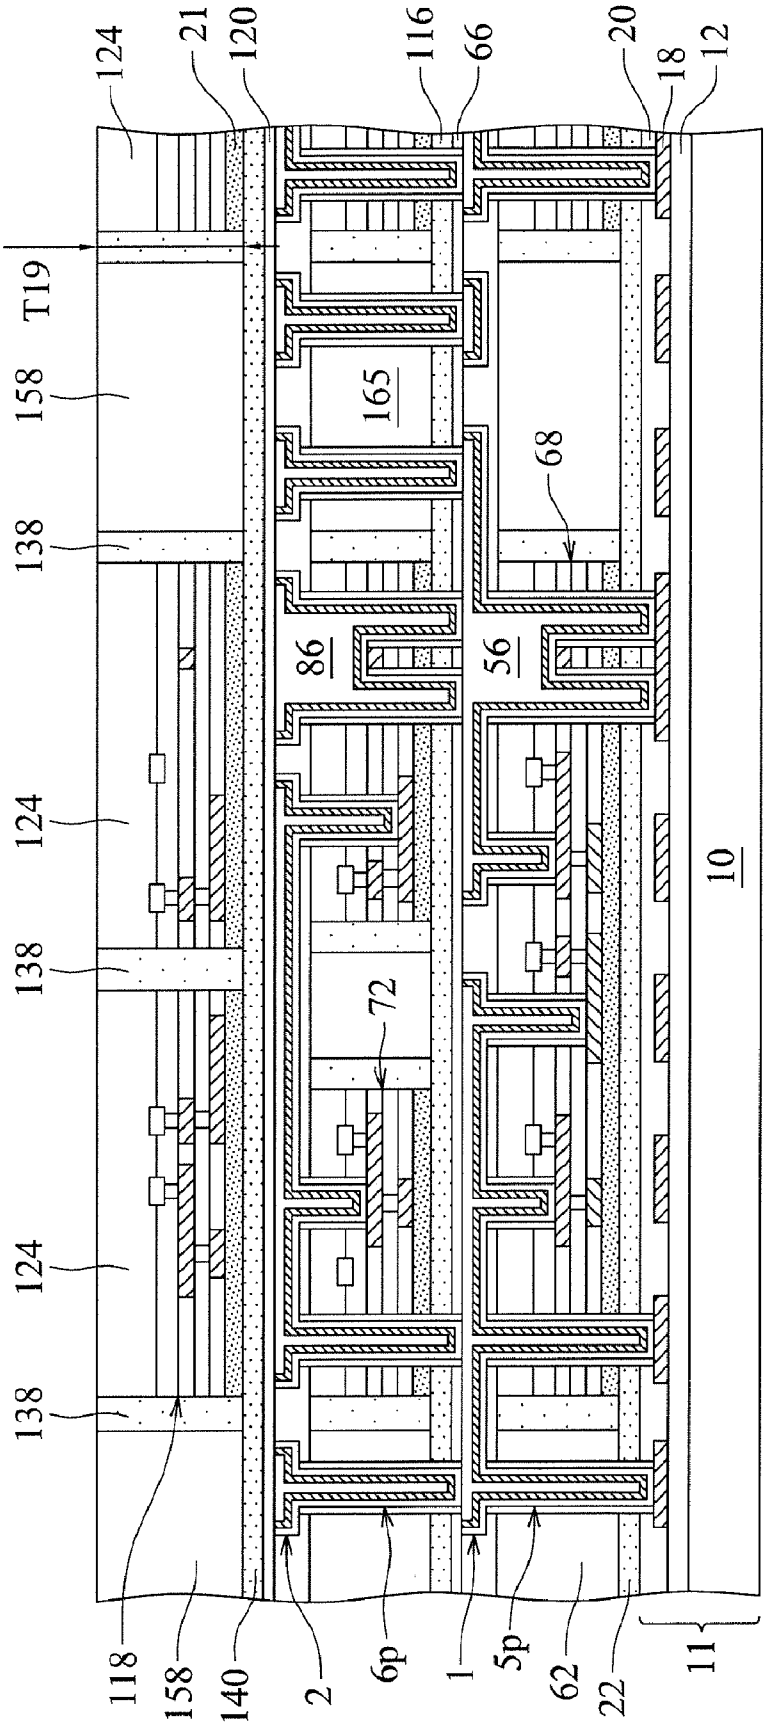

124
21
120
116
66
20
18
12
T19
158
165
68
138
86
56
124
10
138
72
124
138
118
158
140
2
6p
1
5p
62
22
11

Fig. 63

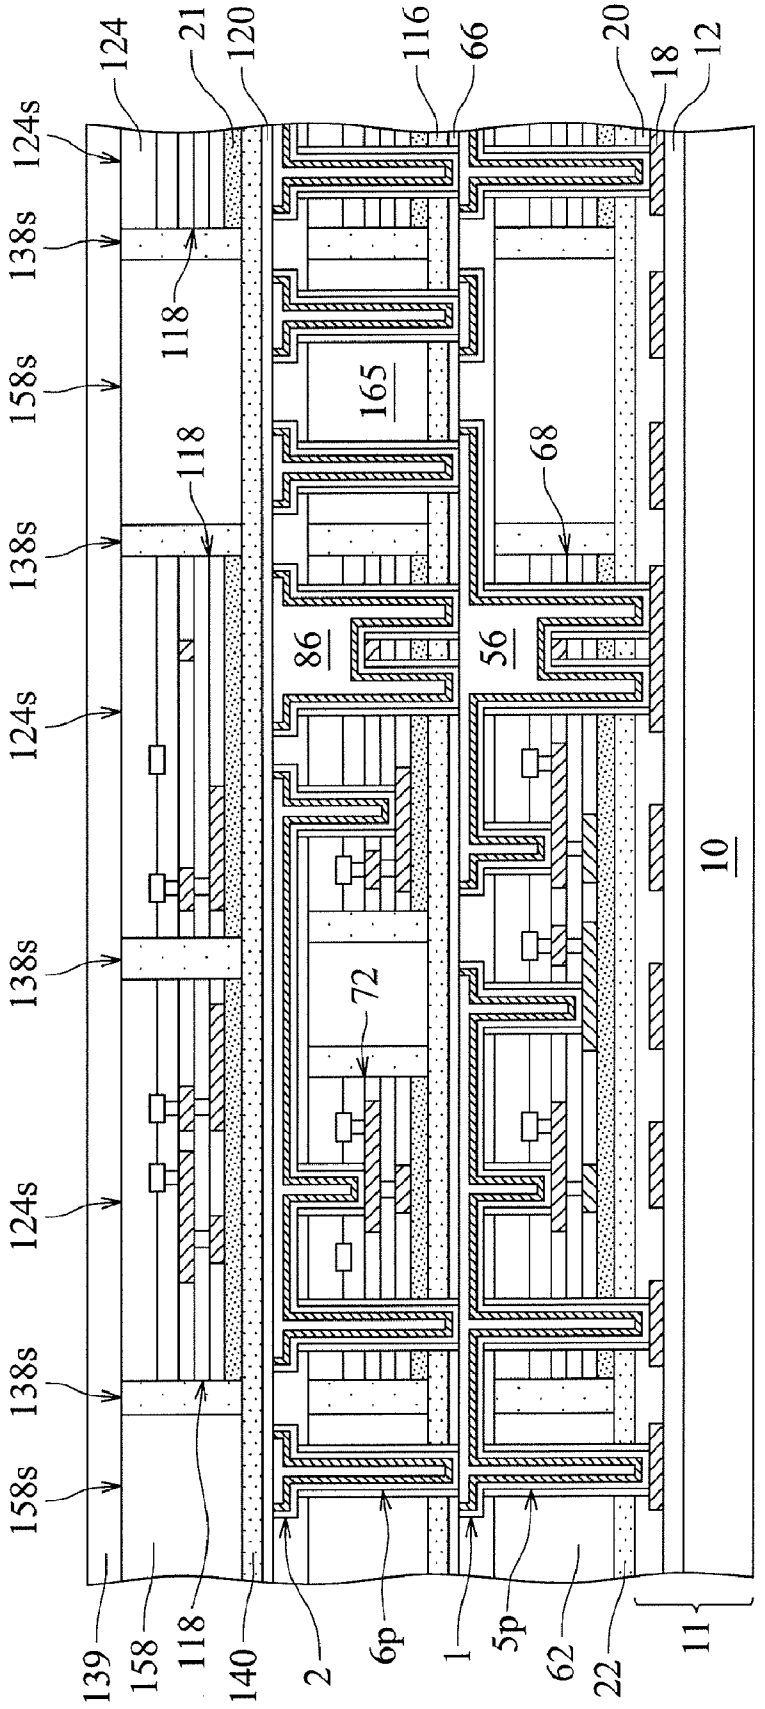

124
21
120
116
66
20
18
12
124s
138s
118
158s
165
68
86
56
10
72
139
158
140
2
6p
1
5p
62
22
11

Fig. 64

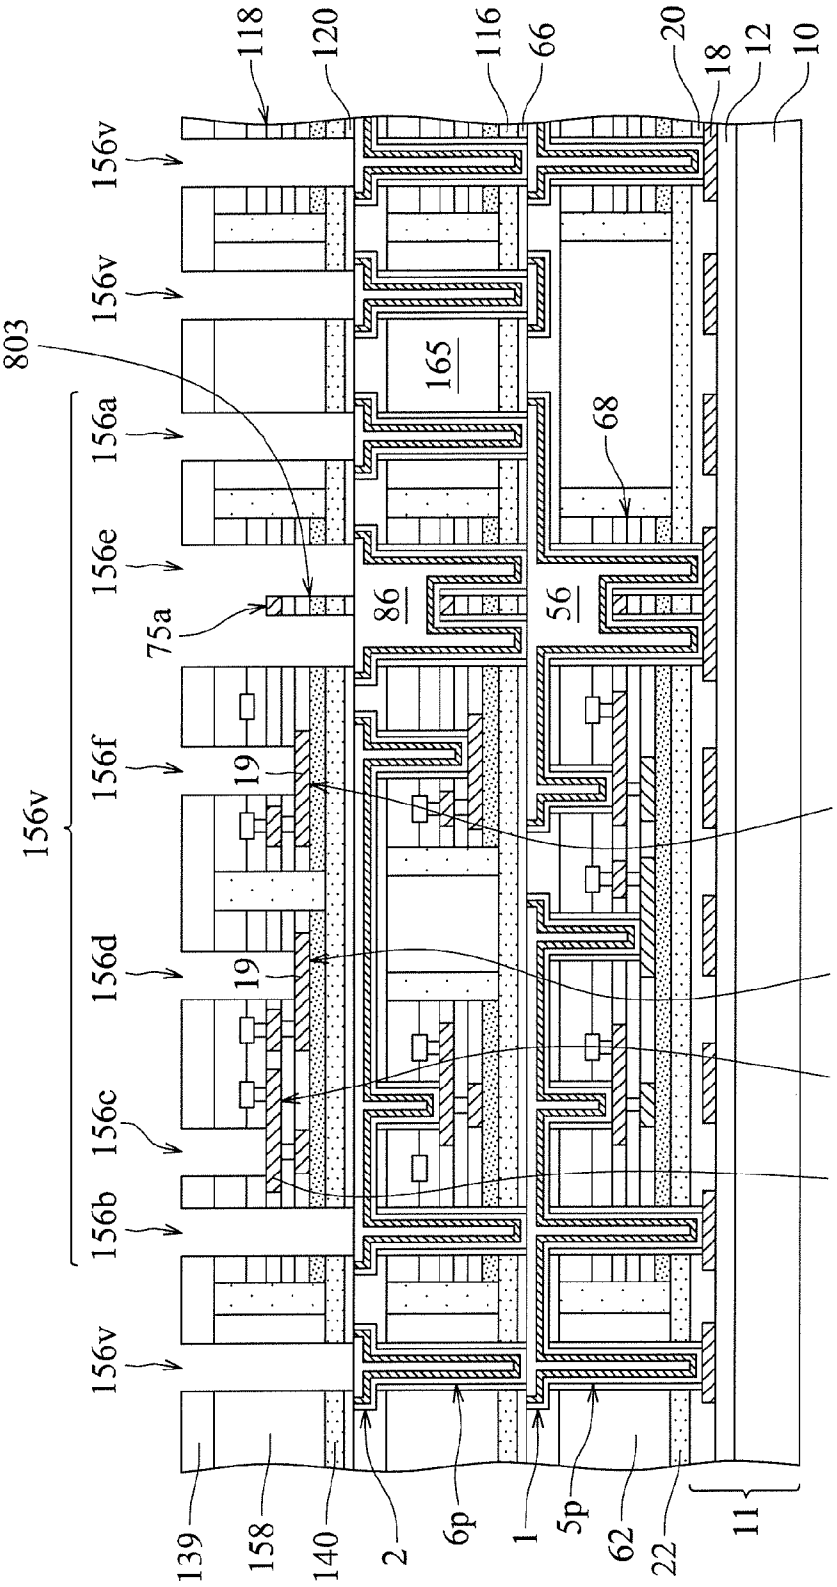

118
120
116
66
20
18
12
10
156v
156v
803
156a
165
68
156e
75a
86
56
156f
19
156v
75b
156d
19
75c
75d
156c
17
156b
156v
139
158
140
2
6p
1
5p
62
22
11

Fig. 65

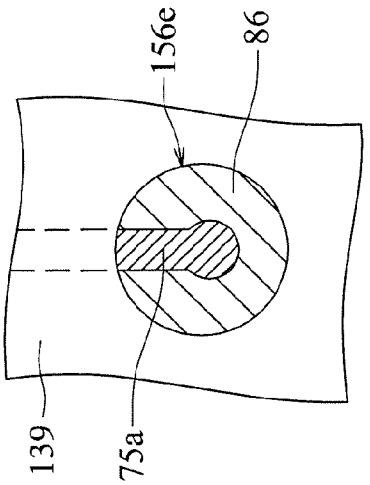


Fig. 68

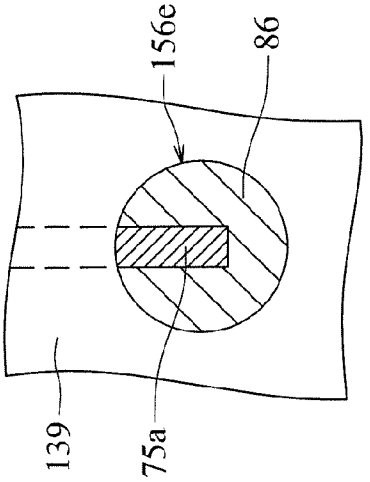


Fig. 67

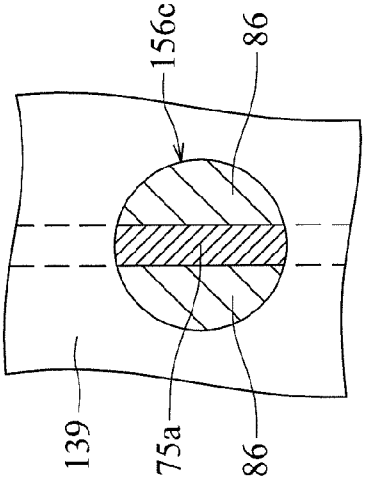


Fig. 66

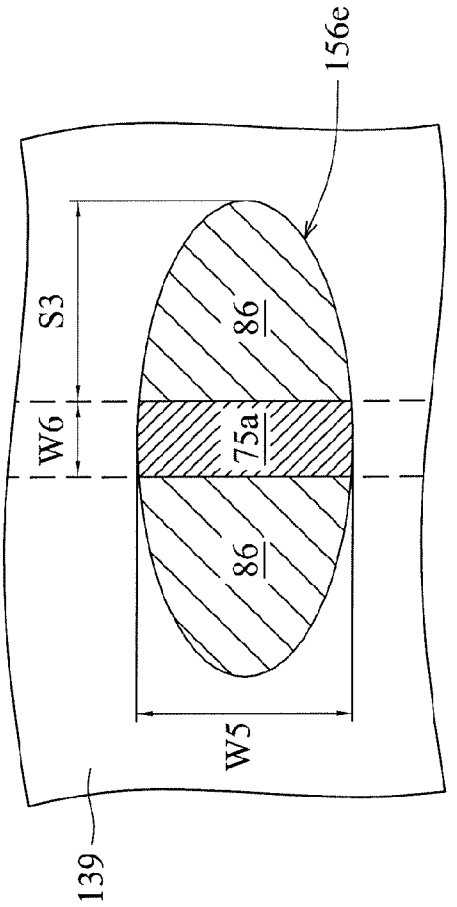


Fig. 66A

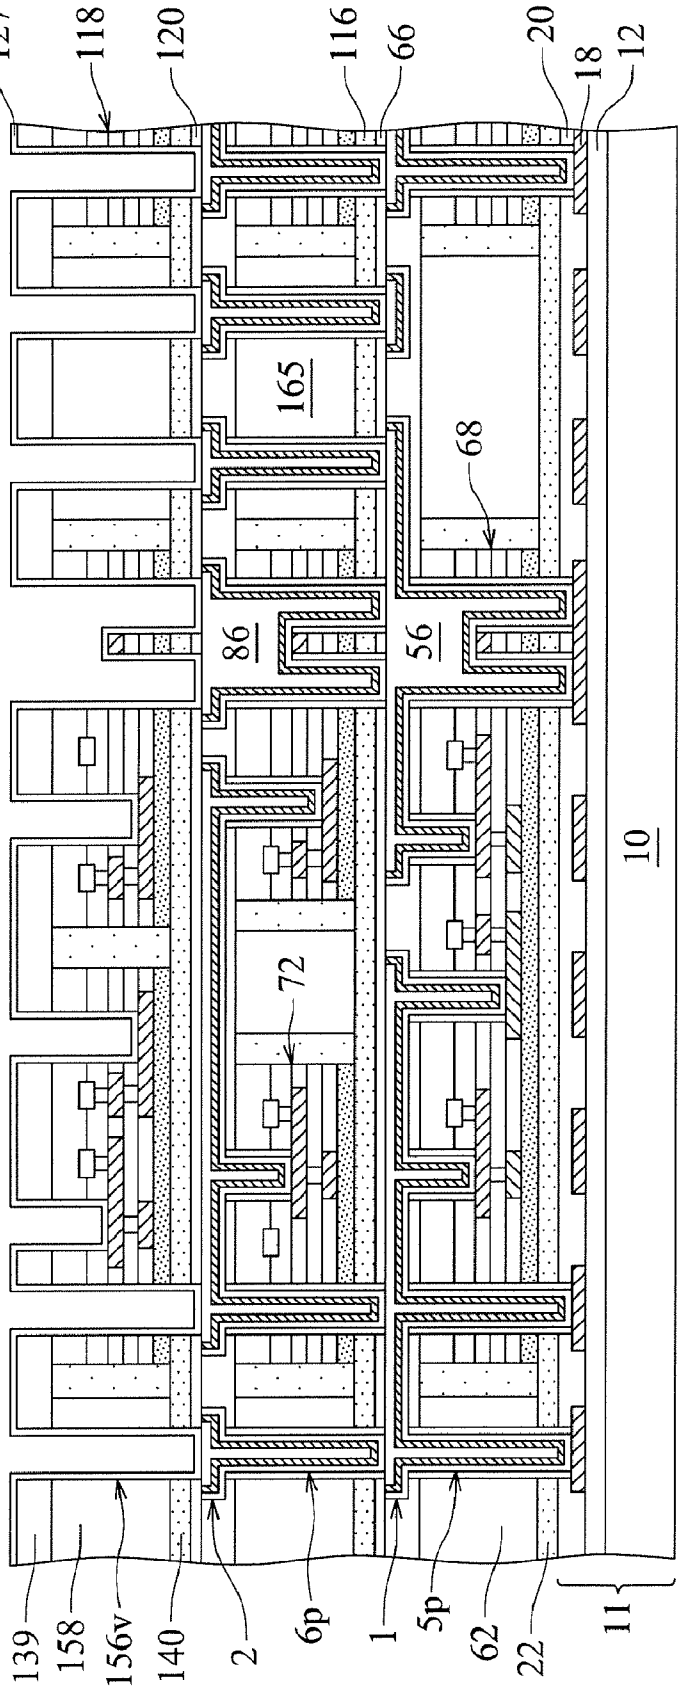

127
118
120
116
66
20
18
12
165
68
86
56
72
10
139
158
156v
140
2
6p
1
5p
62
22
11

Fig. 69

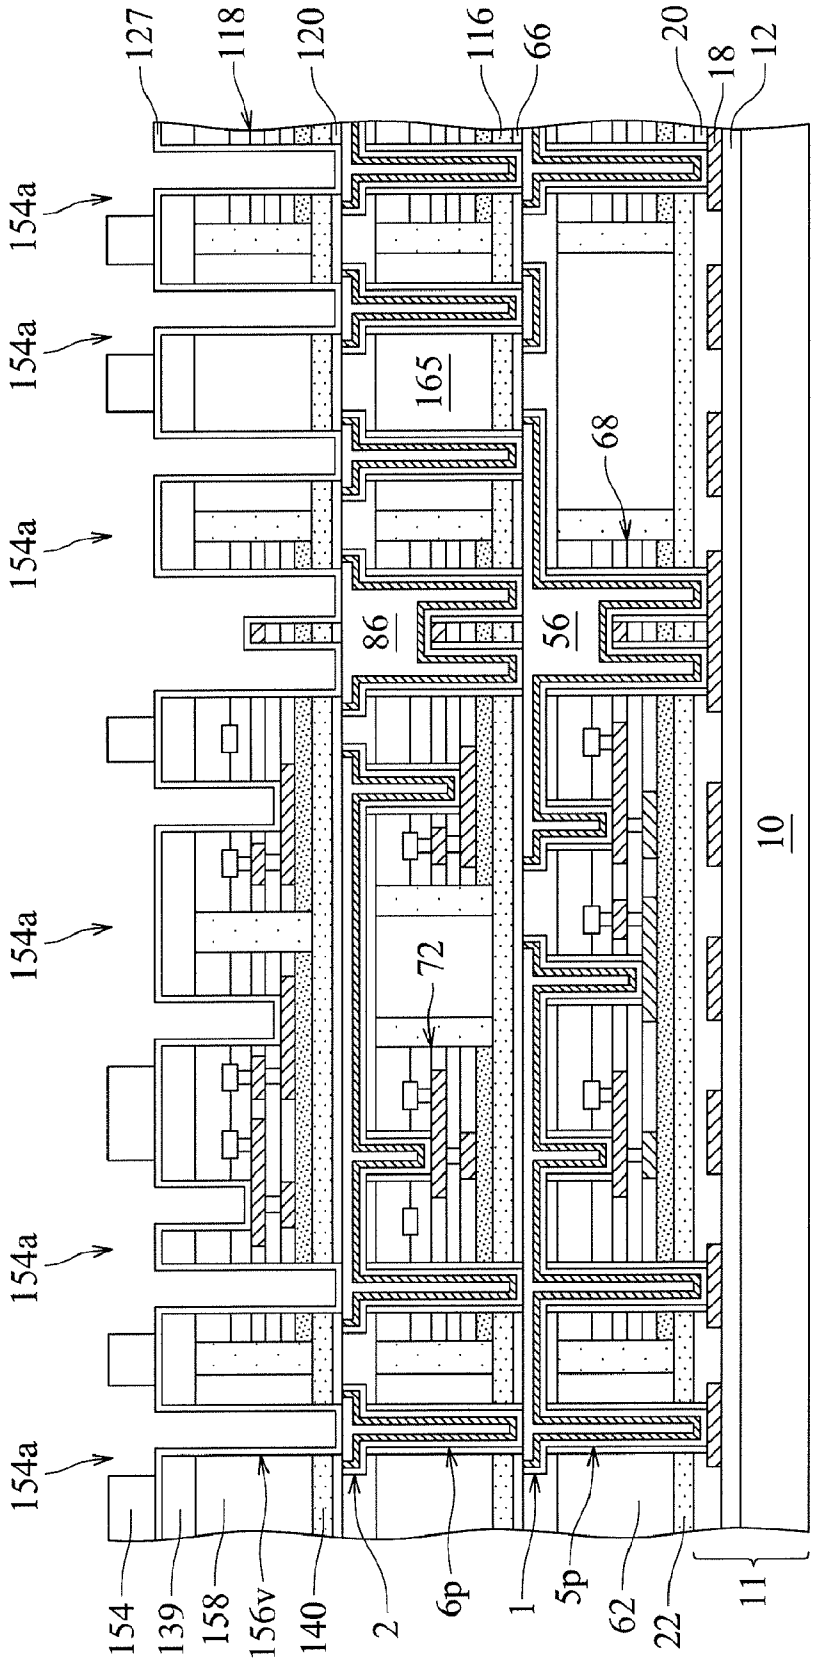

127
118
120
116
66
20
18
12
154a
154a
154a
154a
154a
154a
165
68
86
56
72
10
154
139
158
156v
140
2
6p
1
5p
62
22
11

Fig. 70

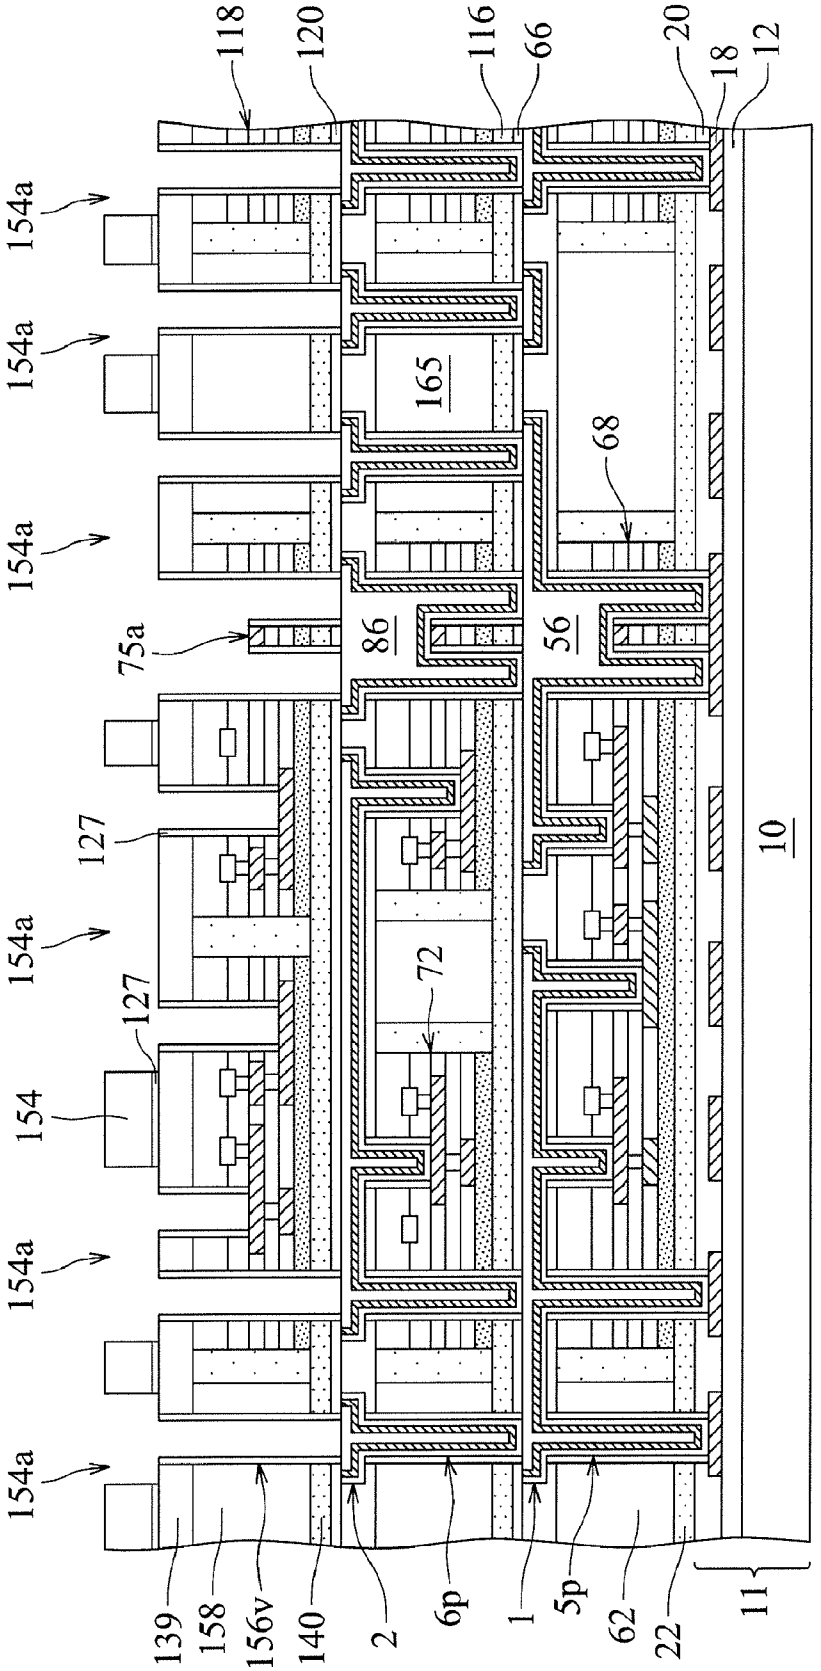

118
120
116
66
20
18
12
154a
154a
154a
165
68
75a
86
56
127
154a
72
127
154
154a
154a
139
158
156v
140
2
6p
1
5p
62
22
11
10

Fig. 71

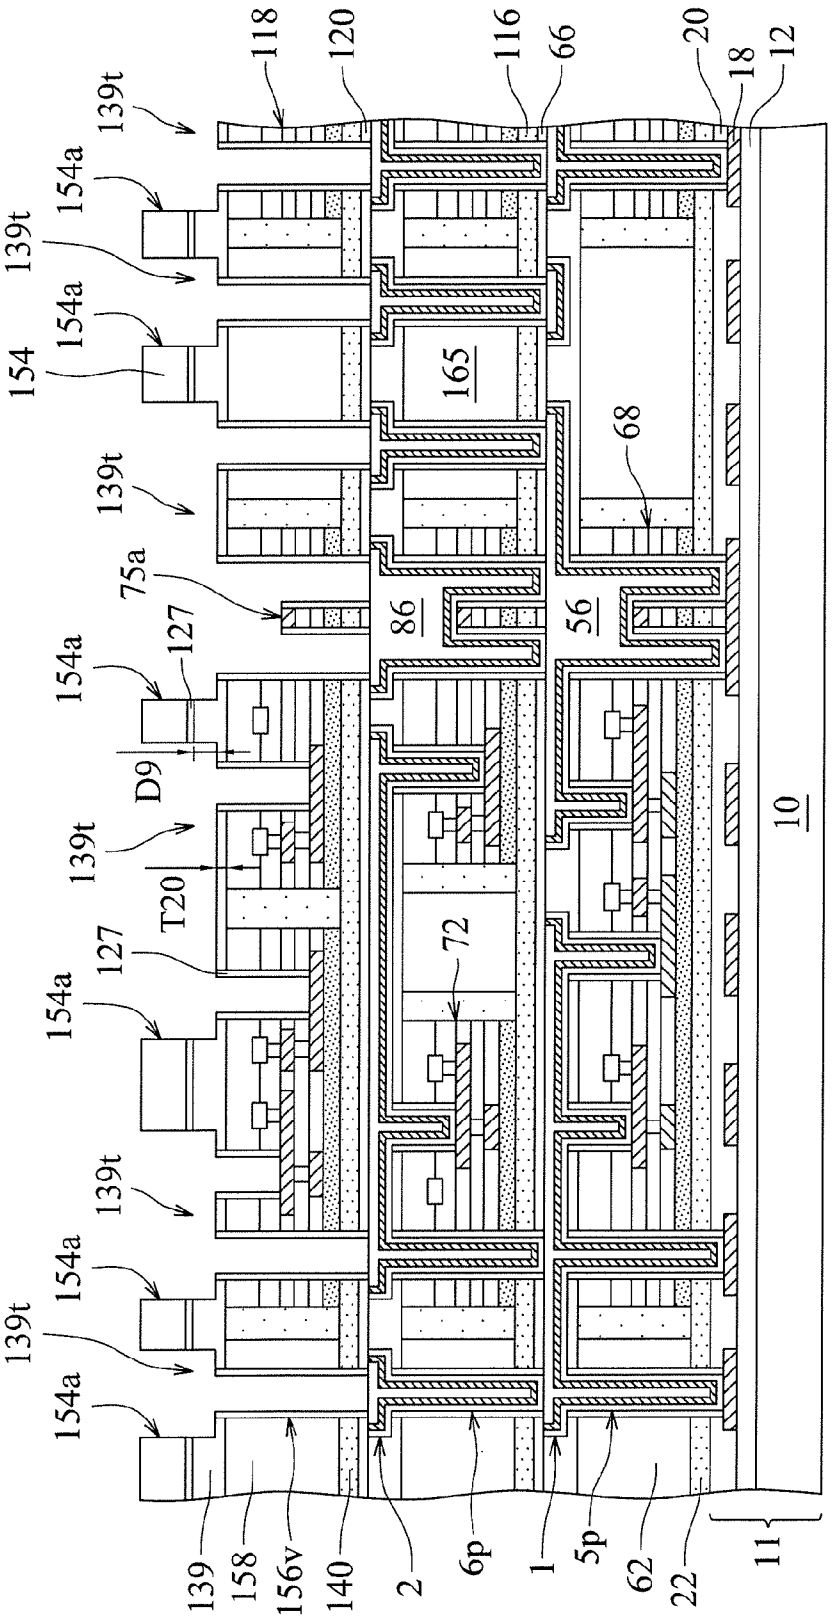

118
120
116
66
20
18
12
139t
154a
139t
154a
154
154a
165
68
139t
75a
127
154a
86
56
D9
139t
T20
127
72
154a
139t
154a
139t
154a
10
139
158
156v
140
2
6p
1
5p
62
22
11

Fig. 72

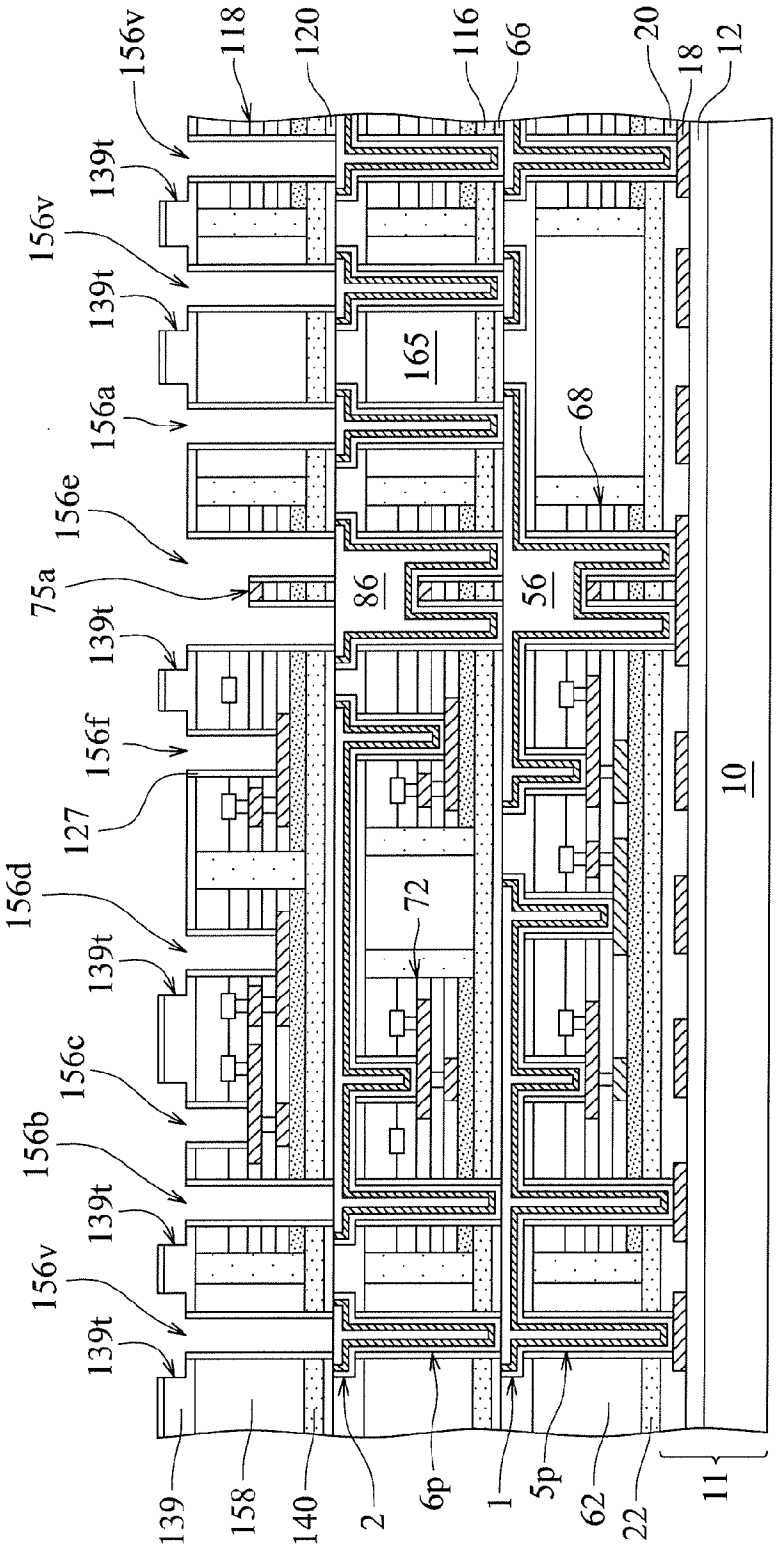

156v
118
120
116
66
20
18
12
139t
156v
139t
165
156a
68
156e
75a
86
56
139t
156f
127
10
156d
72
139t
156c
156b
139t
156v
139t
139
158
140
2
6p
1
5p
62
22
11

Fig. 73

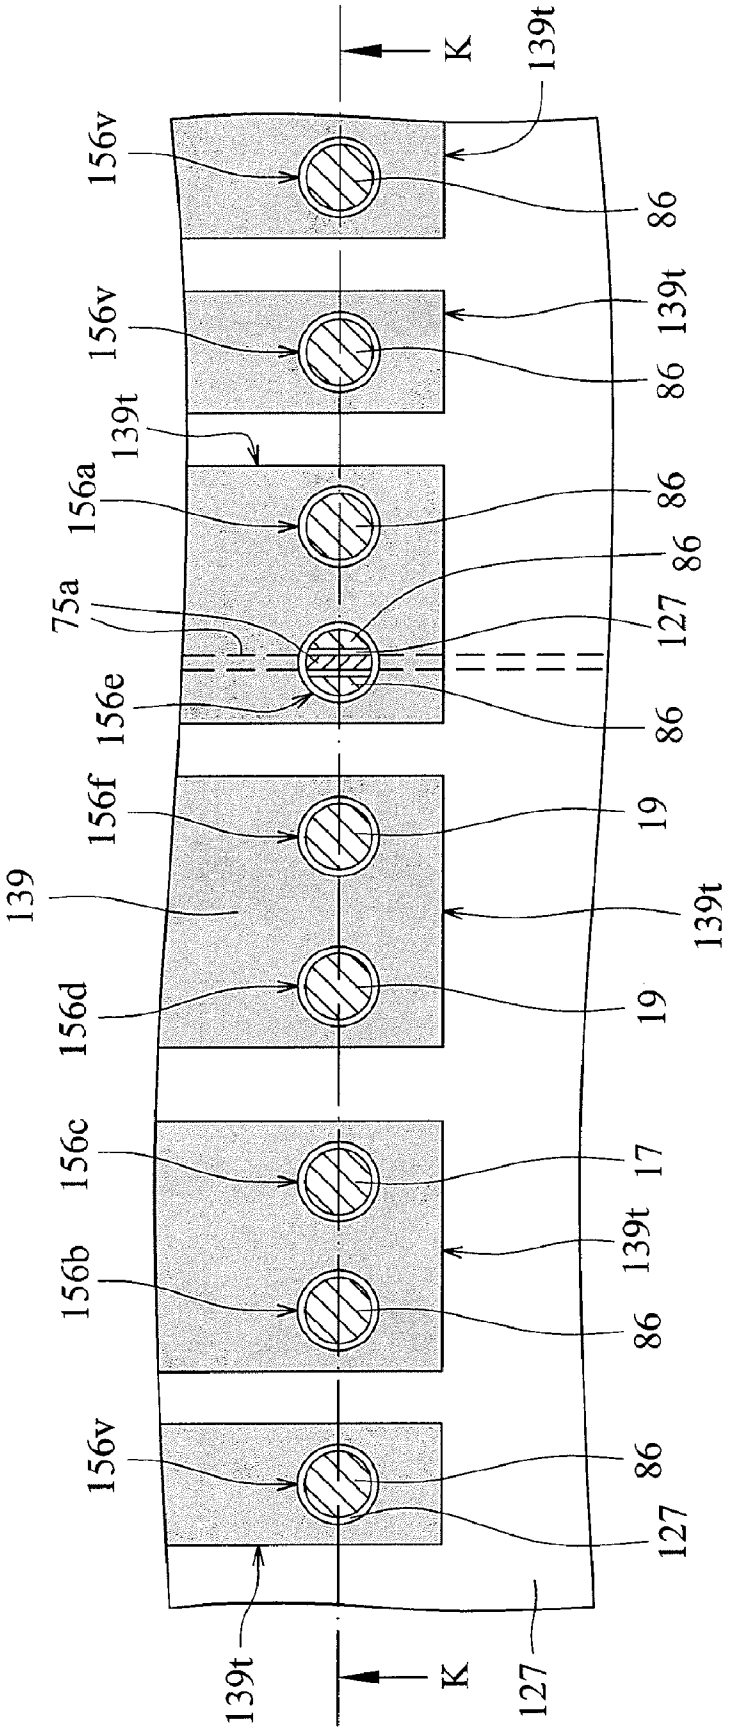

K
139t
156v
86
156v
139t
86
139t
156a
86
86
75a
127
156e
86
156f
19
139
139t
156d
19
156c
17
139t
156b
86
156v
86
127
139t
K
127

Fig. 74

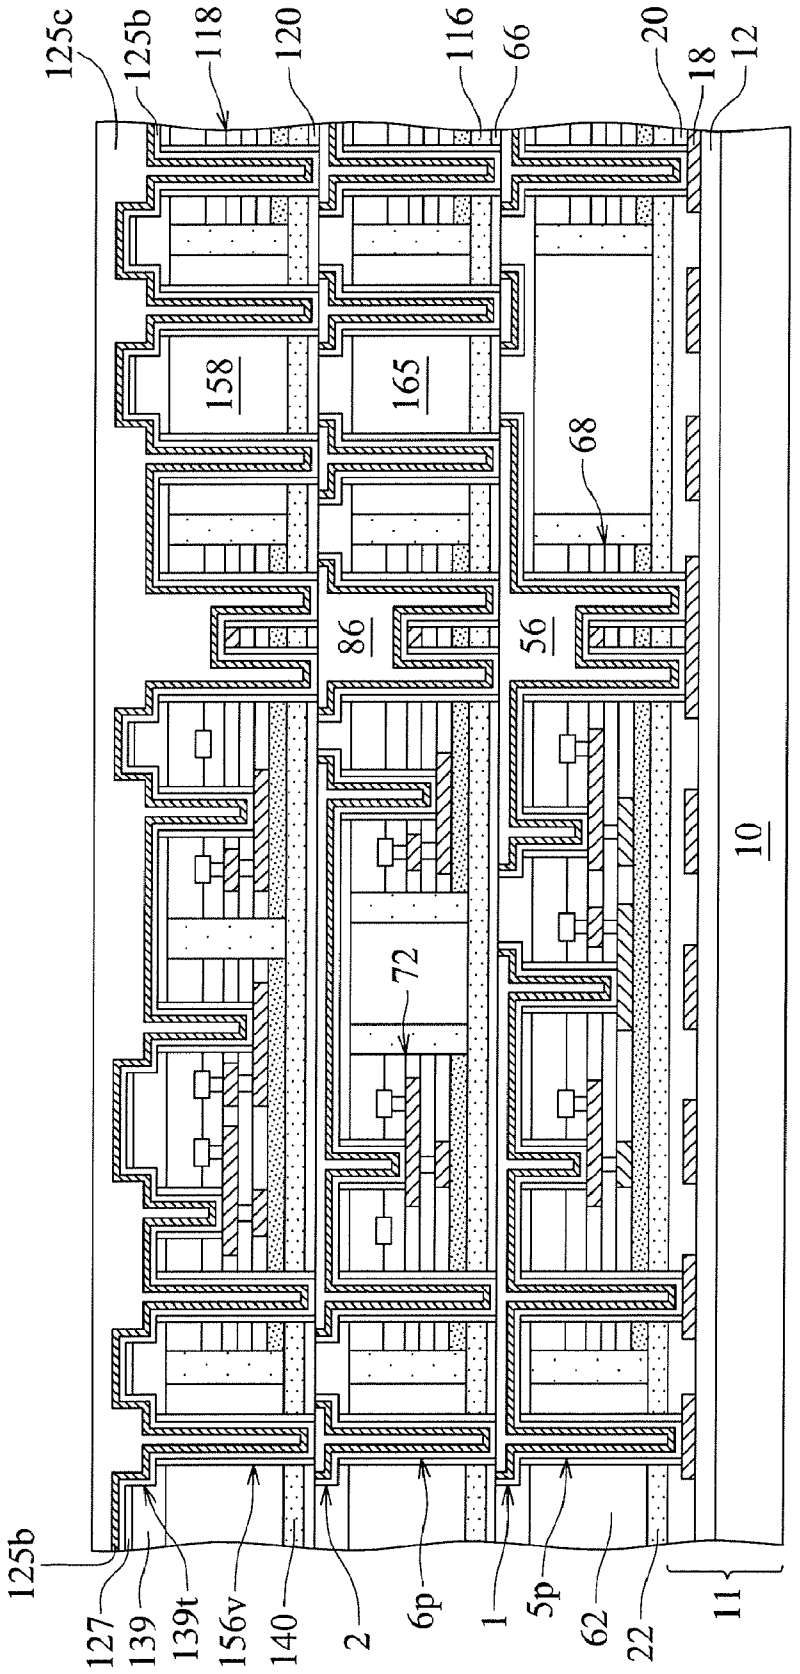

125c
125b
118
120
116
66
20
18
12
158
165
68
86
56
10
72
125b
127
139
139t
156v
140
2
6p
1
5p
62
22
11

Fig. 75

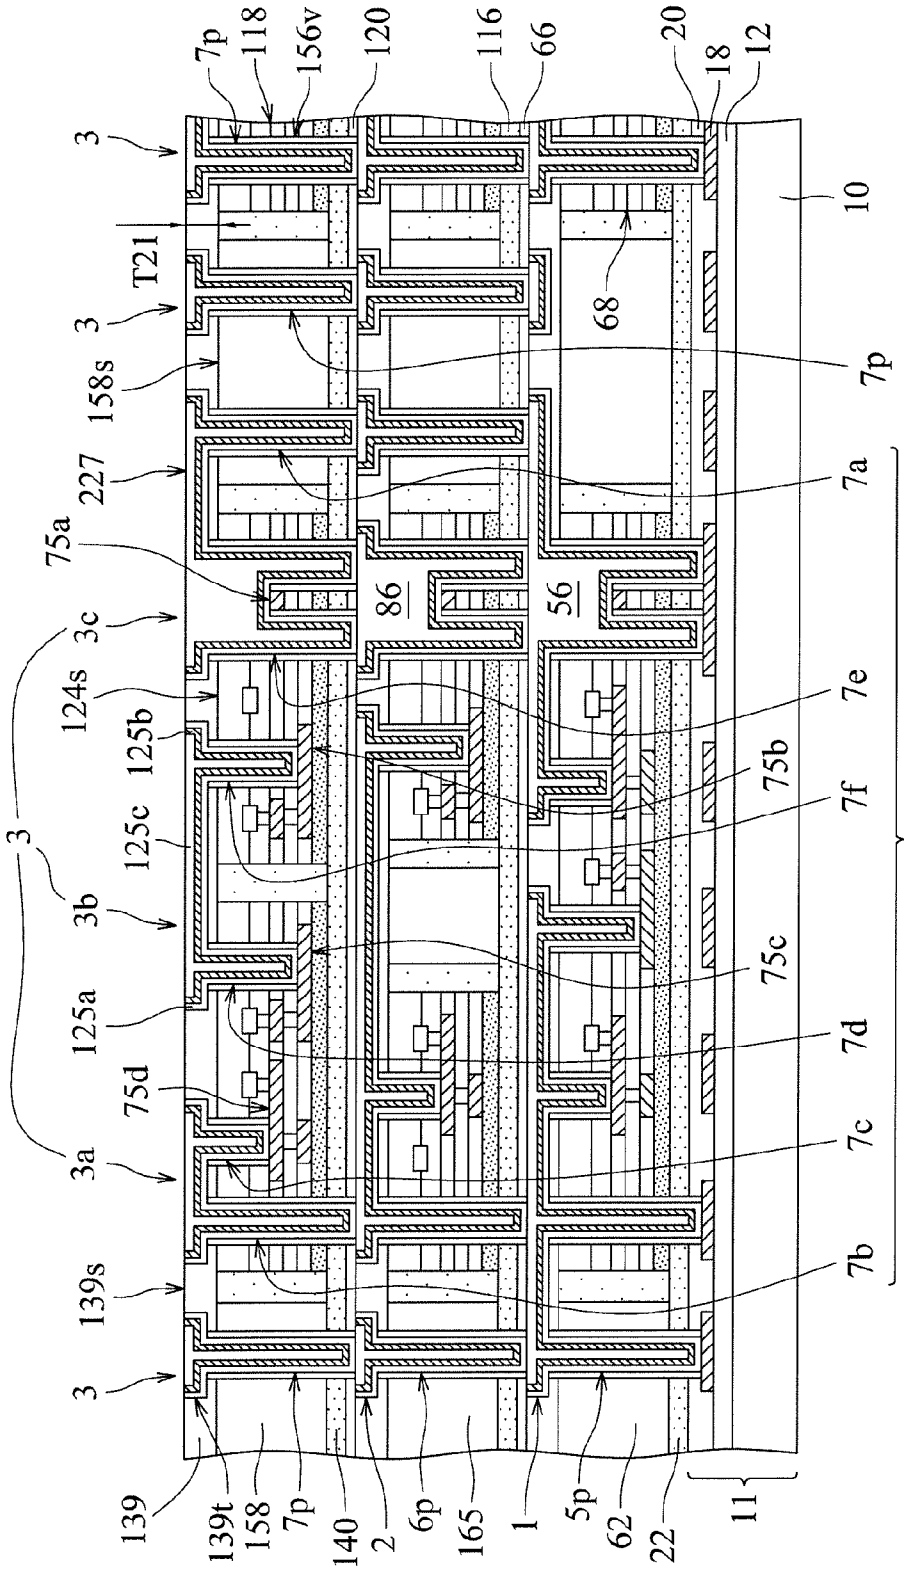

7p
118
156v
120
116
66
20
18
12
3
10
T21
3
68
158s
7p
227
7a
75a
86
56
3c
124s
7e
125b
75b
125c
7f
3
3b
125a
75c
7d
75d
3a
7c
139s
7b
3
139
139t
158
7p
140
2
6p
165
1
5p
62
22
11
7p

Fig. 76

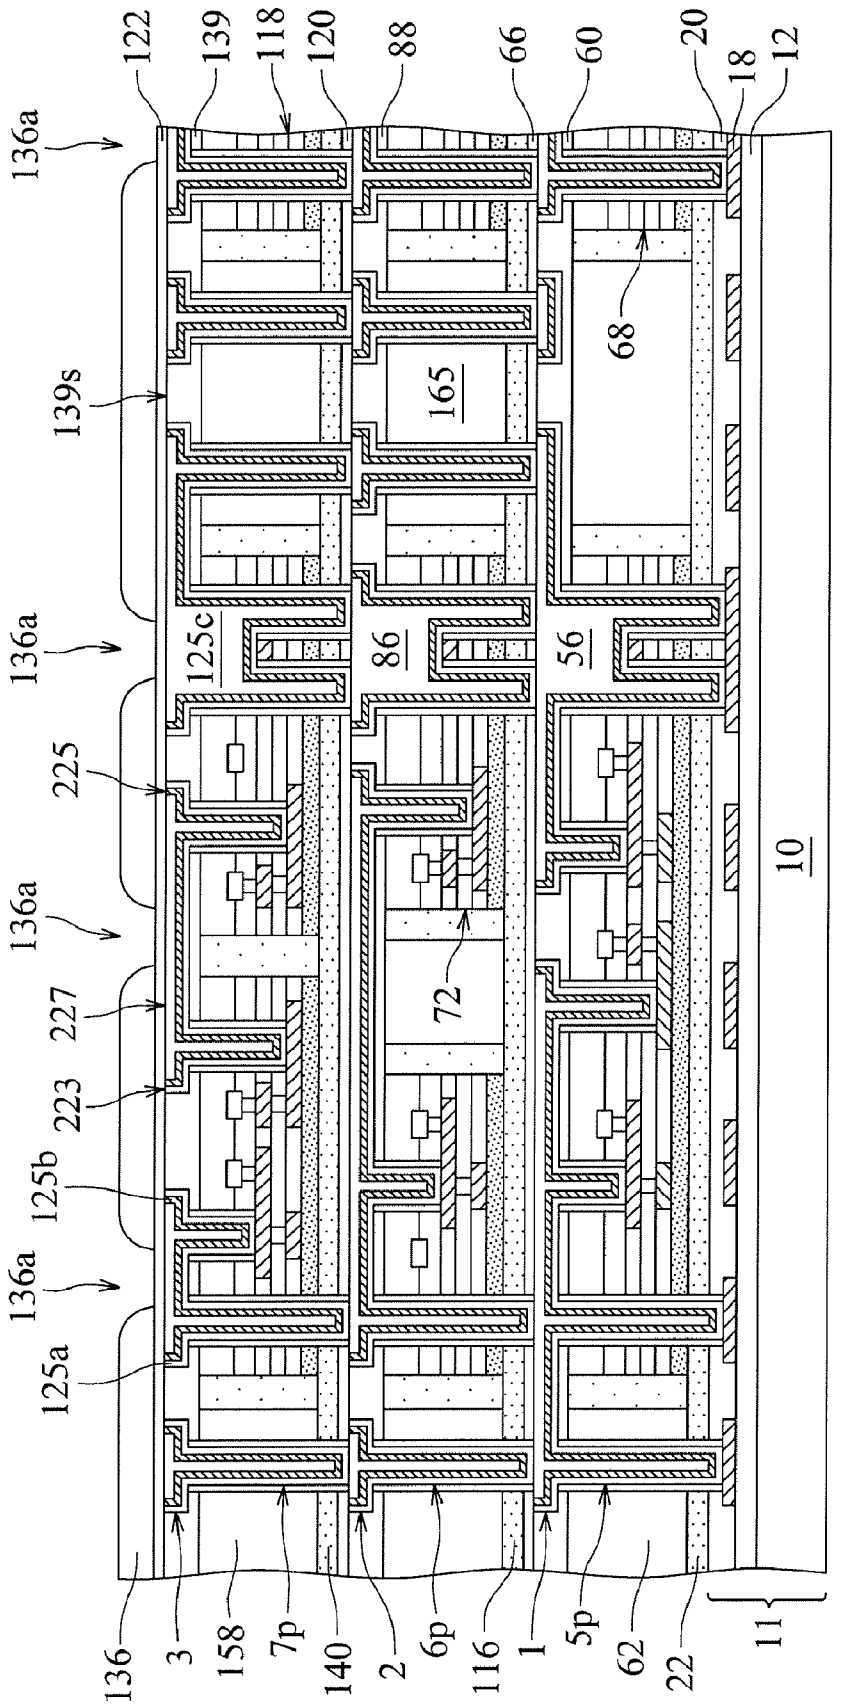

122
139
118
120
88
66
60
20
18
12
136a
139s
165
68
136a
125c
86
56
225
136a
72
227
223
125b
136a
125a
10
136
3
158
7p
140
2
6p
116
1
5p
62
22
11

Fig. 77

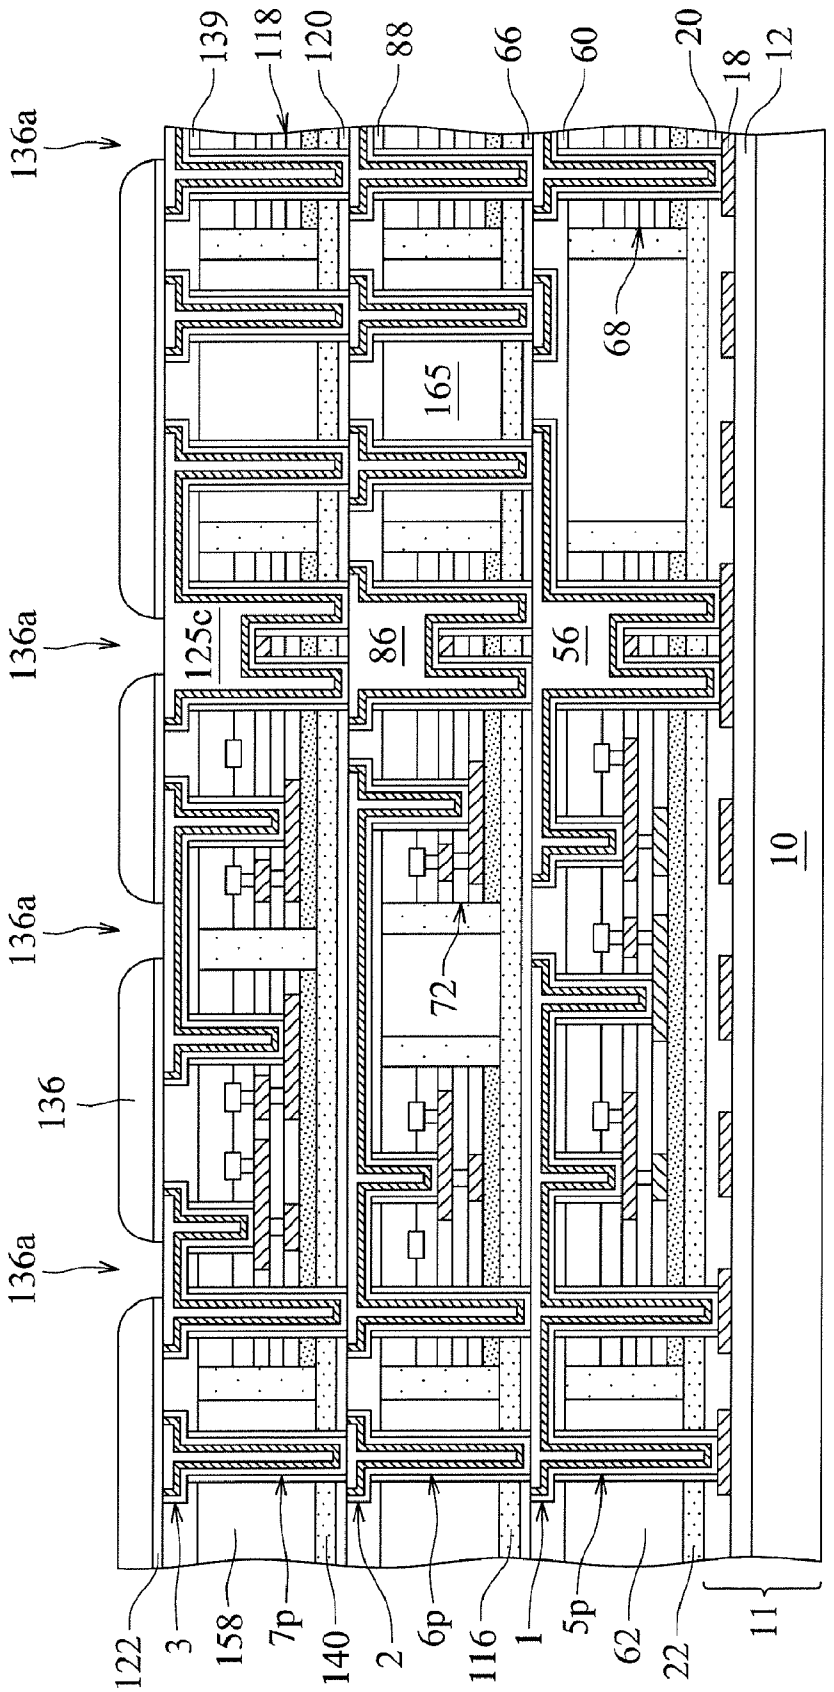

139
118
120
88
66
60
20
18
12
136a
136a
136a
136a
136
125c
165
86
56
68
72
10
122
3
158
7p
140
2
6p
116
1
5p
62
22
11

Fig. 78

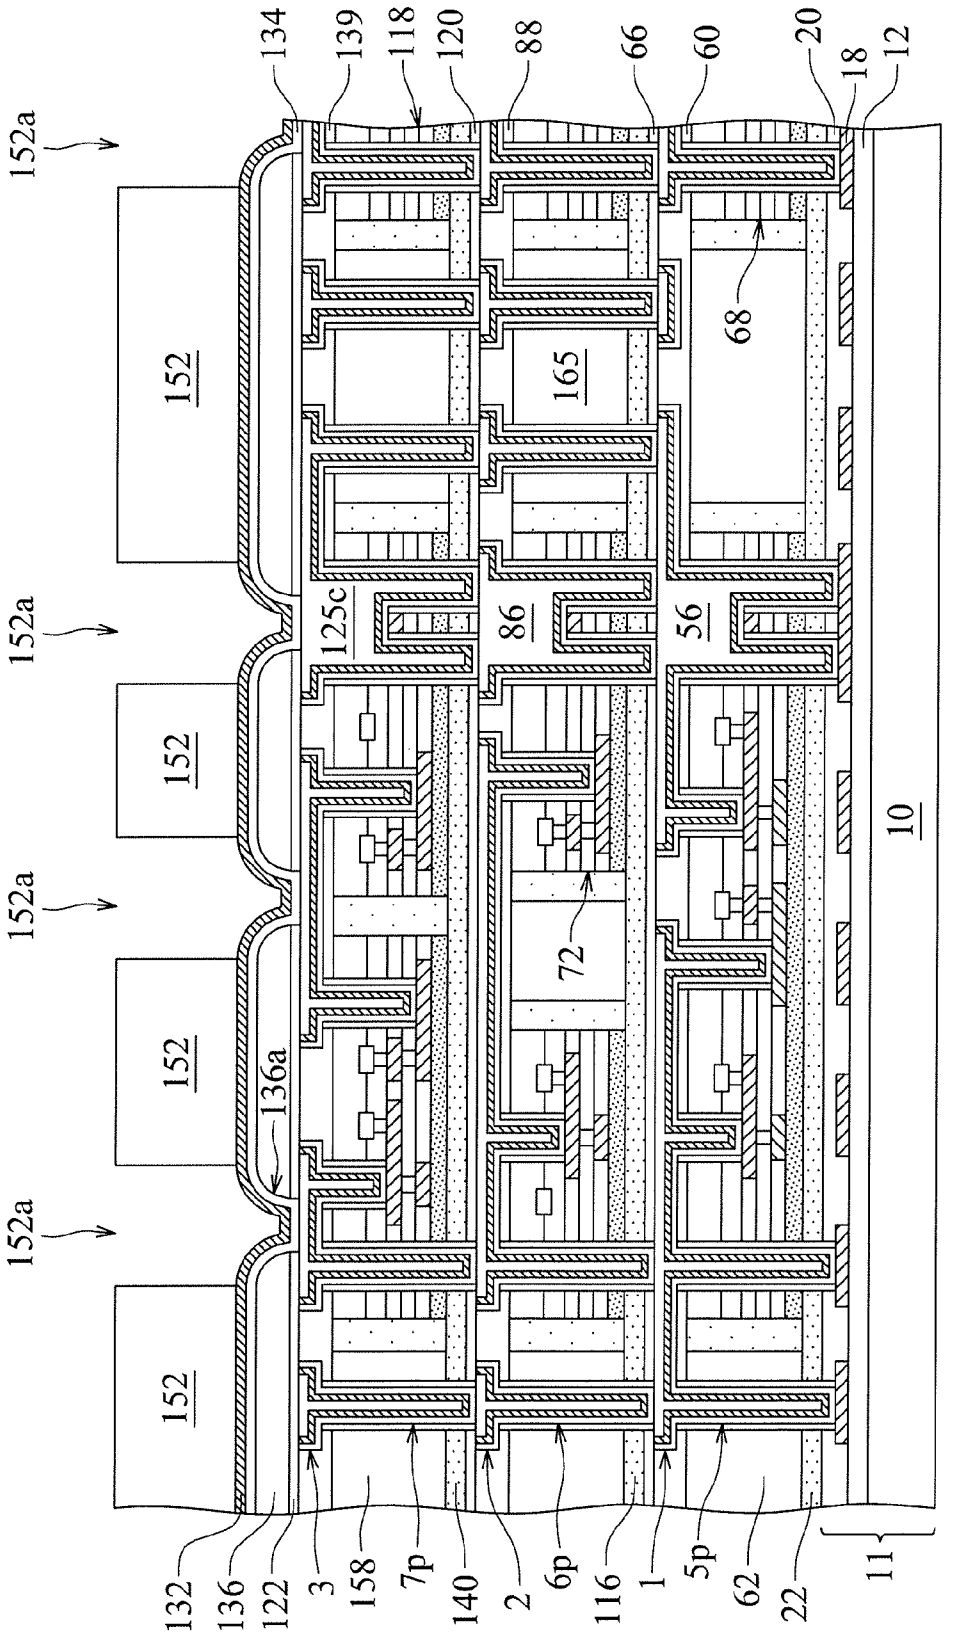

152a
152
134
139
118
120
88
66
60
20
18
12
68
165
125c
86
56
72
136a
10
132
136
122
3
158
7p
140
2
6p
116
1
5p
62
22
11

Fig. 79

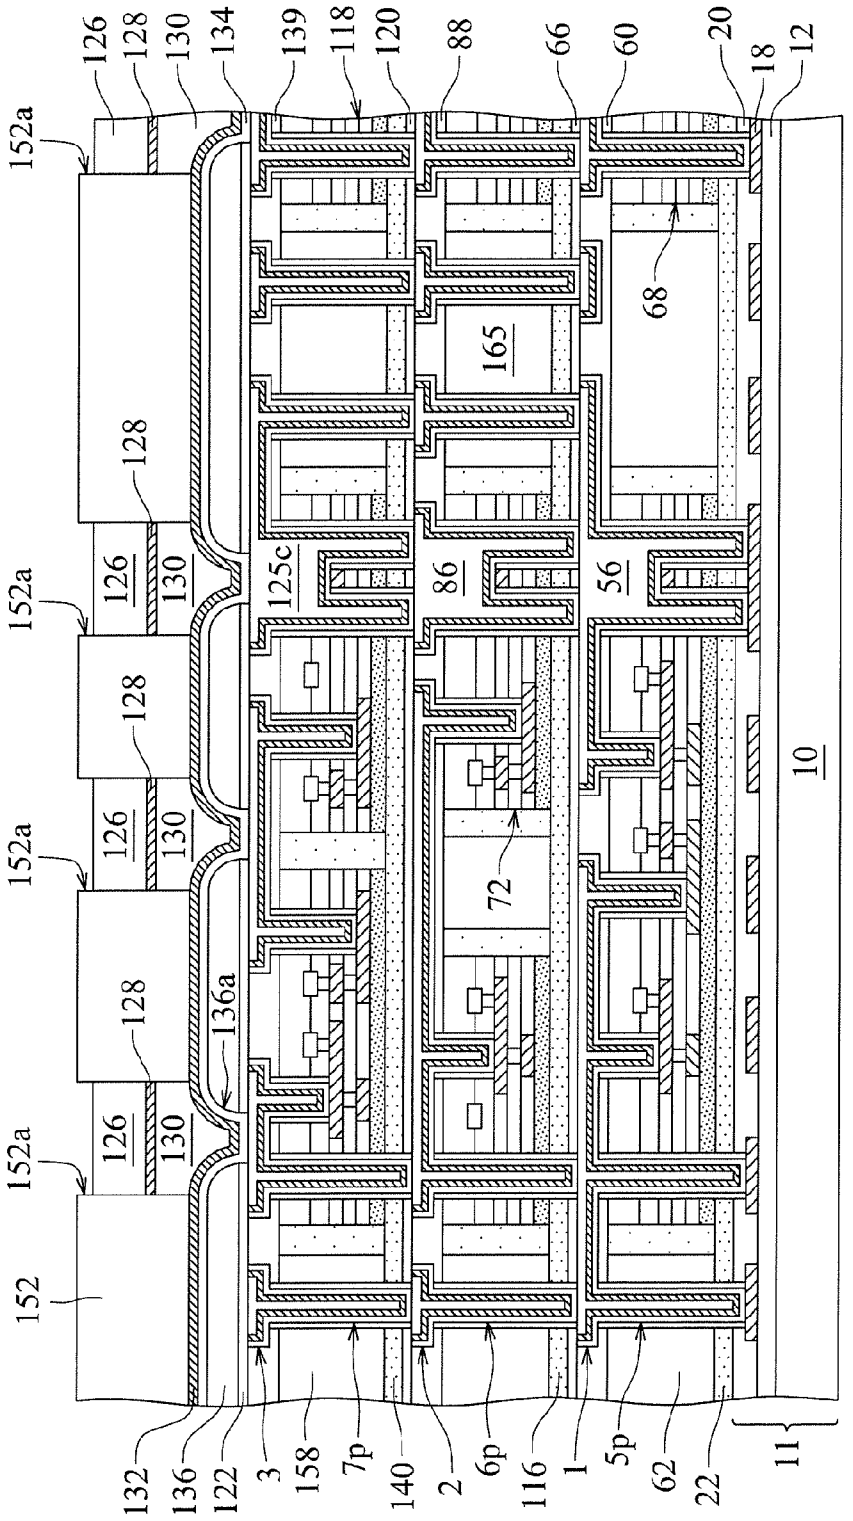

126
128
130
134
139
118
120
88
66
60
20
18
12
152a
68
165
125c
86
56
72
10
136a
152
132
136
122
3
158
7p
140
2
6p
116
1
5p
62
22
11

Fig. 80

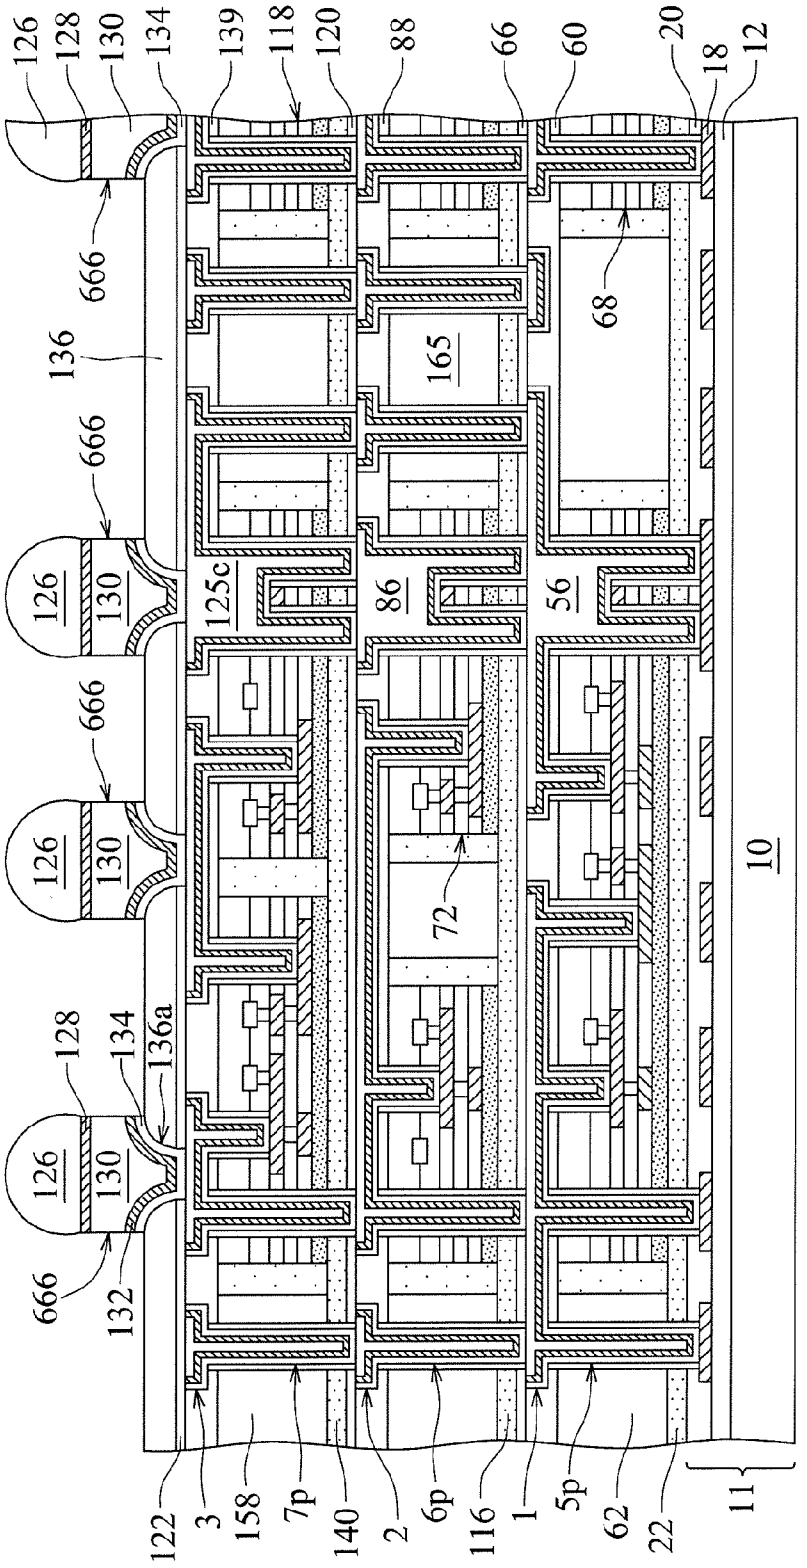

126
128
130
134
139
118
120
88
66
60
20
18
12
666
136
165
68
125c
86
56
72
10
136a
132
122
3
158
7p
140
2
6p
116
1
5p
62
22
11

Fig. 81

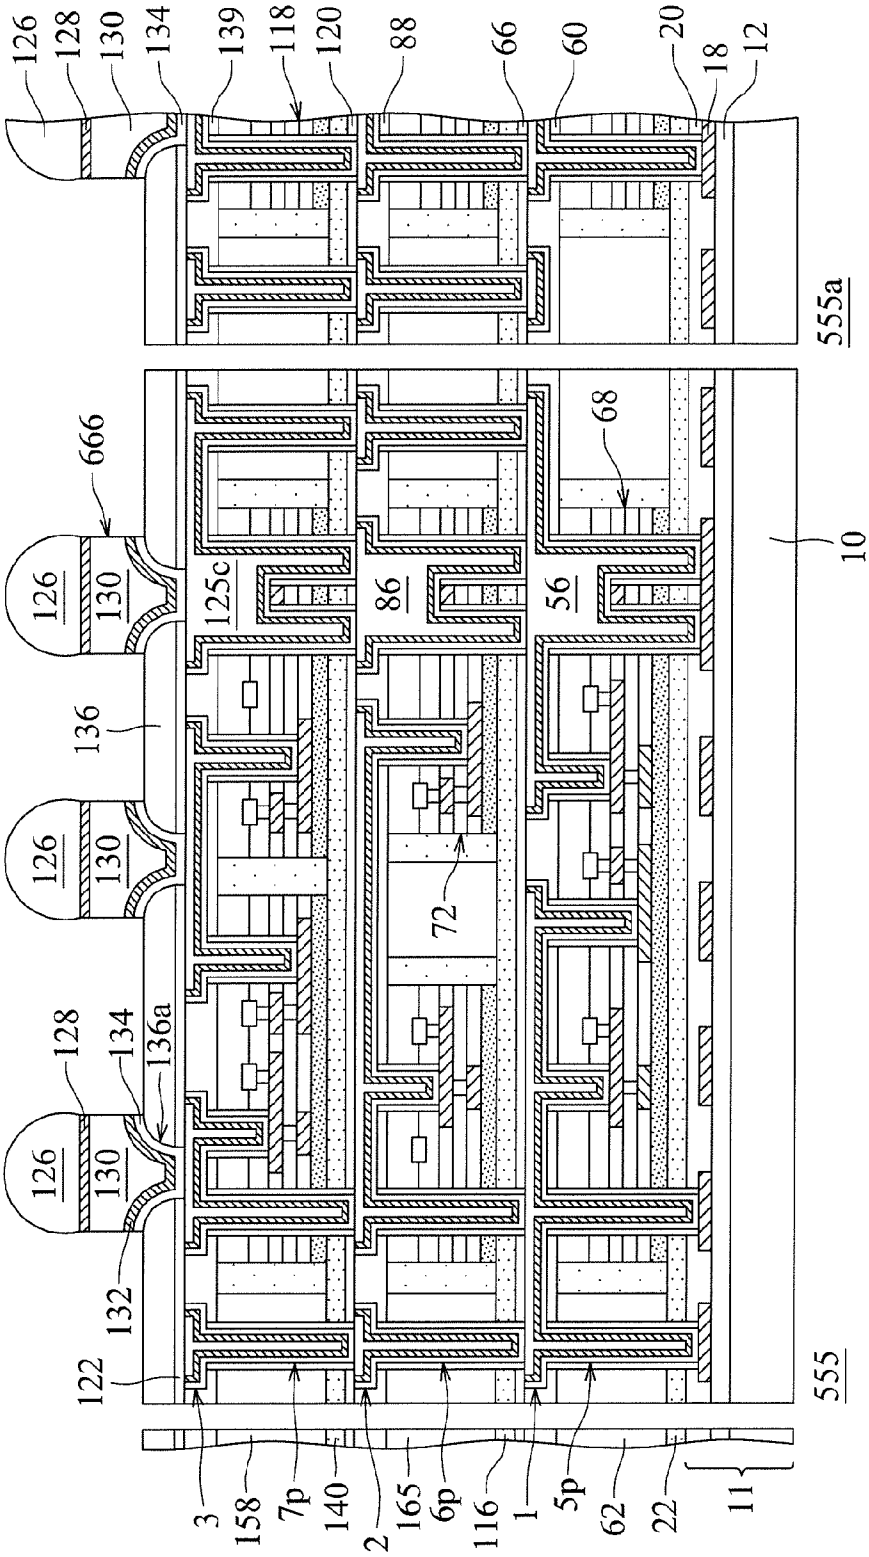

126
128
130
134
139
118
120
88
66
60
20
18
12
555a
666
68
10
126
130
125c
86
56
136
126
130
72
128
134
136a
126
130
132
122
555
3
158
7p
140
2
165
6p
116
1
5p
62
22
11

Fig. 82

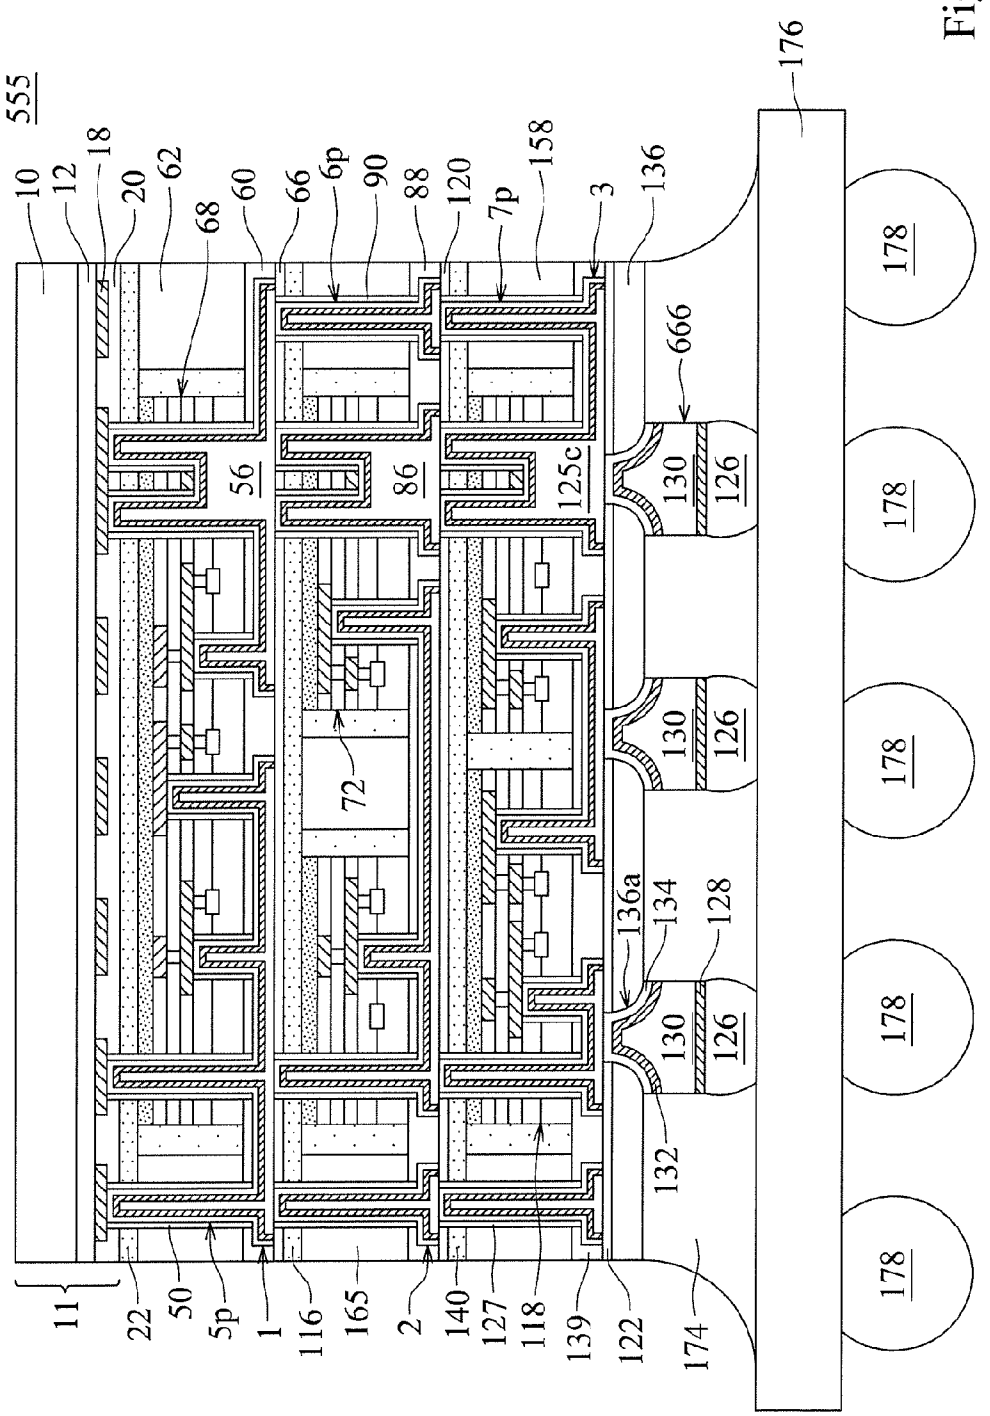

555
10
12
18
20
62
68
60
66
6p
90
88
120
7p
158
3
136
176
178
666
130
126
56
86
125c
72
136a
134
128
132
11
22
50
5p
1
116
165
2
140
127
118
139
122
174

Fig. 83

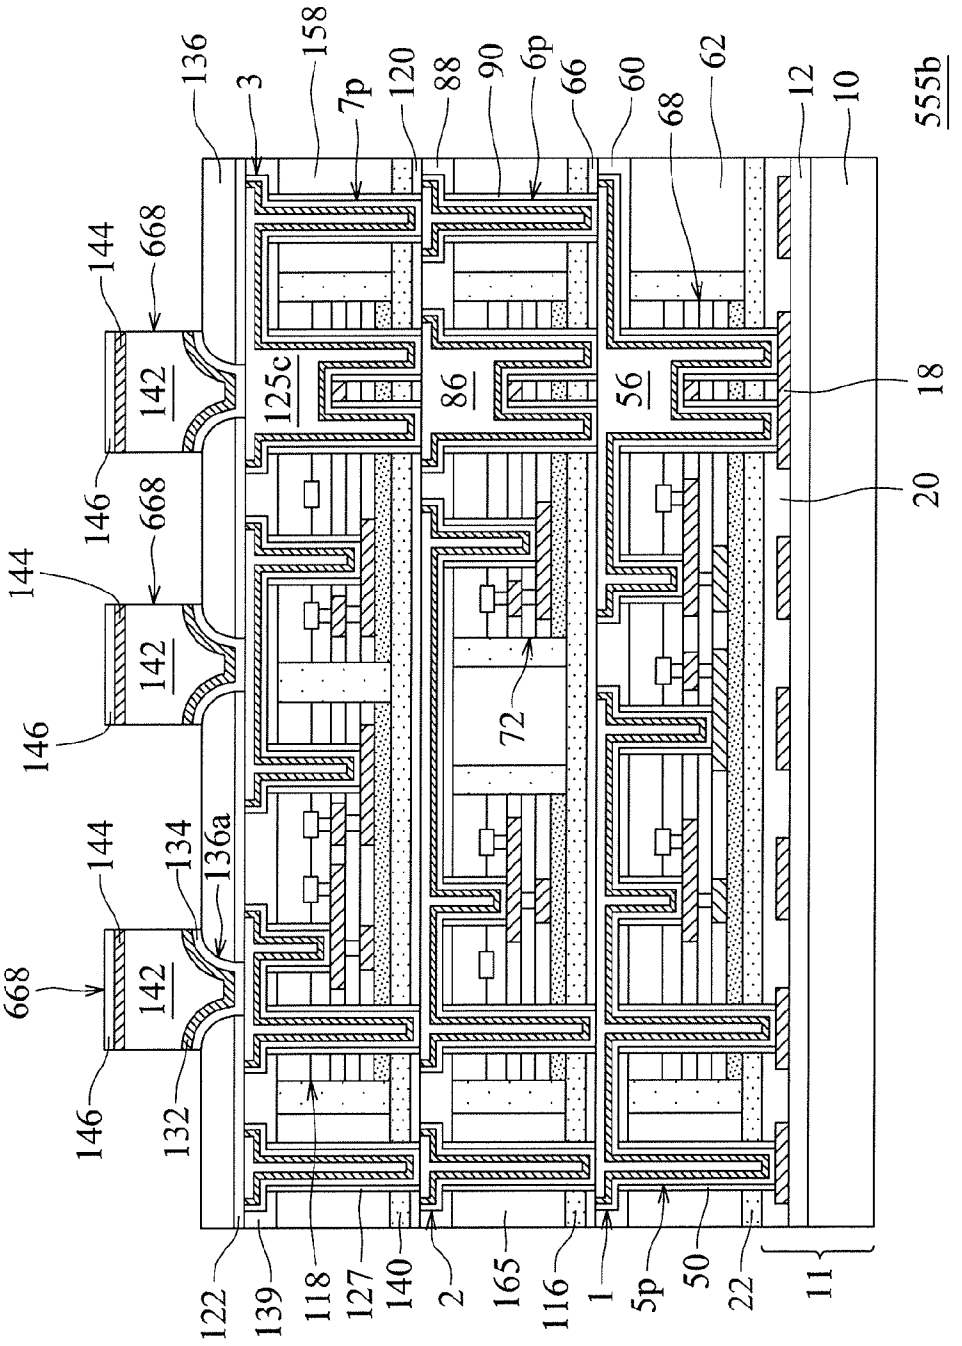

136
3
158
7p
120
88
90
6p
66
60
68
62
12
10
555b
144
668
142
146
125c
86
56
18
20
72
134
136a
132
122
139
118
127
140
2
165
116
1
5p
50
22
11

Fig. 84

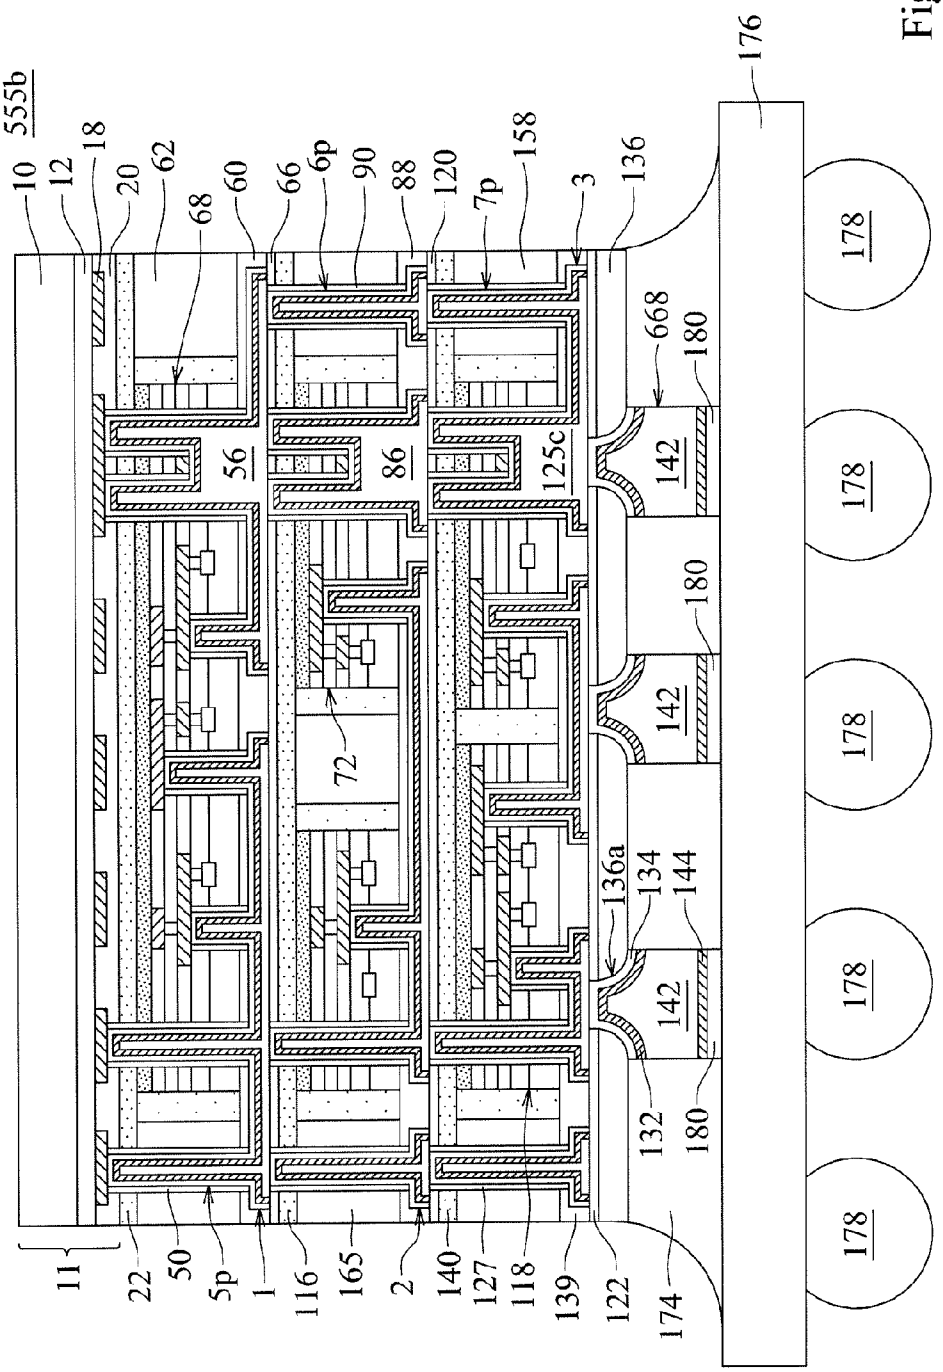

555b
10
12
18
20
62
68
60
66
6p
90
88
120
7p
158
3
136
176
668
180
142
178
56
86
125c
72
136a
134
144
132
11
22
50
5p
1
116
165
2
140
127
118
139
122
174

Fig. 85

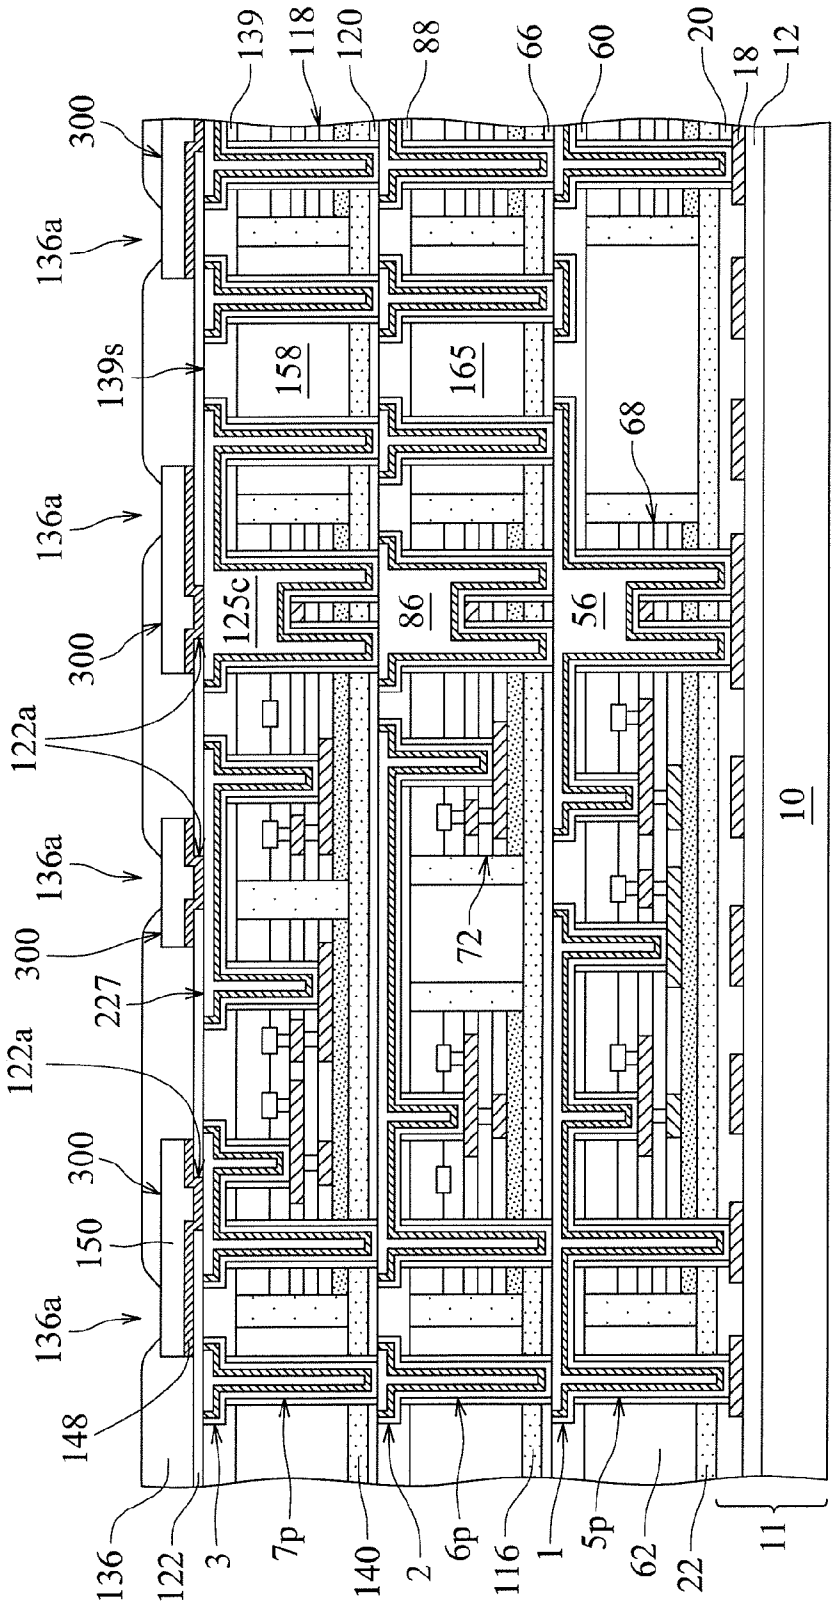

139
118
120
88
66
60
20
18
12
300
136a
139s
158
165
68
125c
86
56
122a
72
227
150
148
136
122
3
7p
140
2
6p
116
1
5p
62
22
11
10

Fig. 86

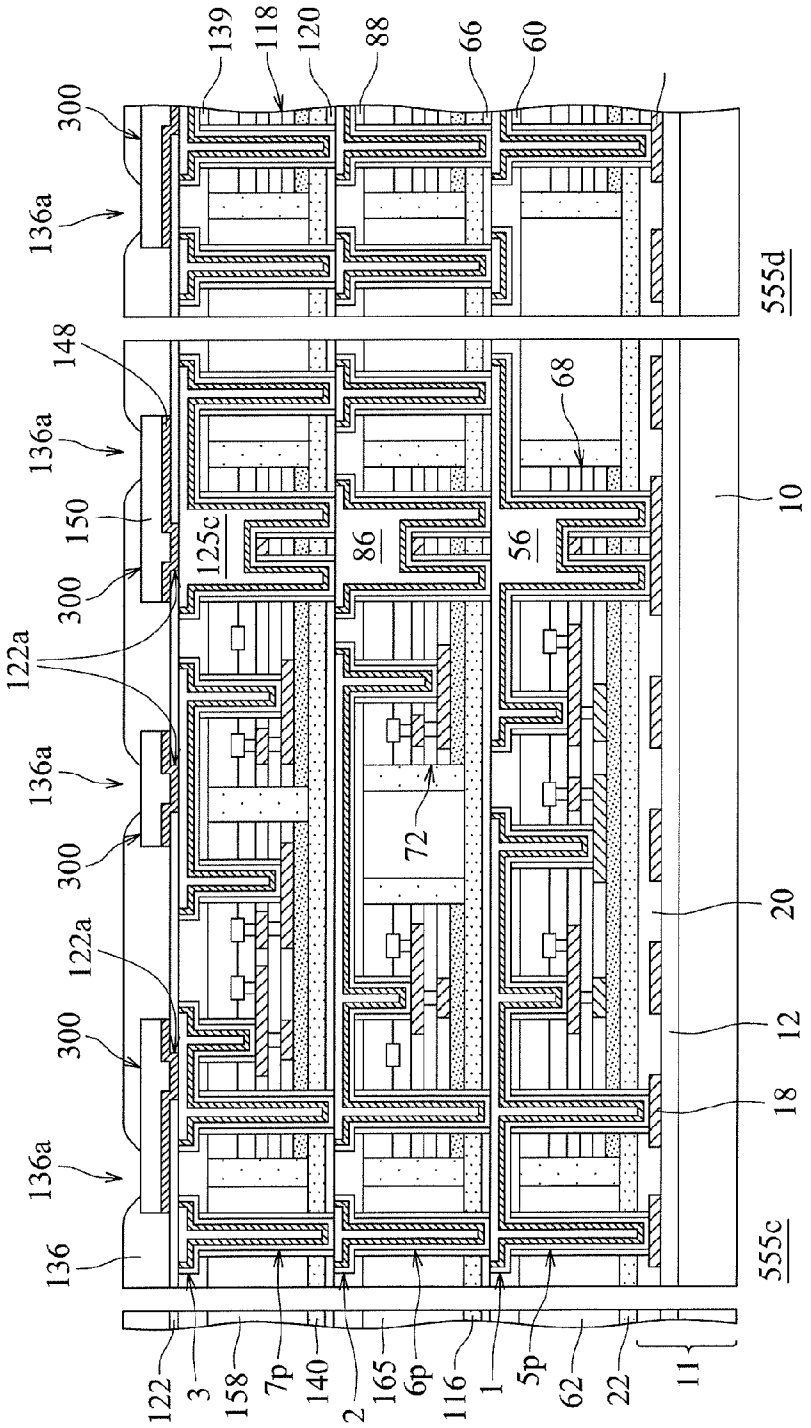

139
118
120
88
66
60
300
136a
555d
148
68
136a
150
125c
86
56
10
300
122a
136a
72
300
20
122a
300
12
136a
18
136
555c
122
3
158
7p
140
2
165
6p
116
1
5p
62
22
11

Fig. 87

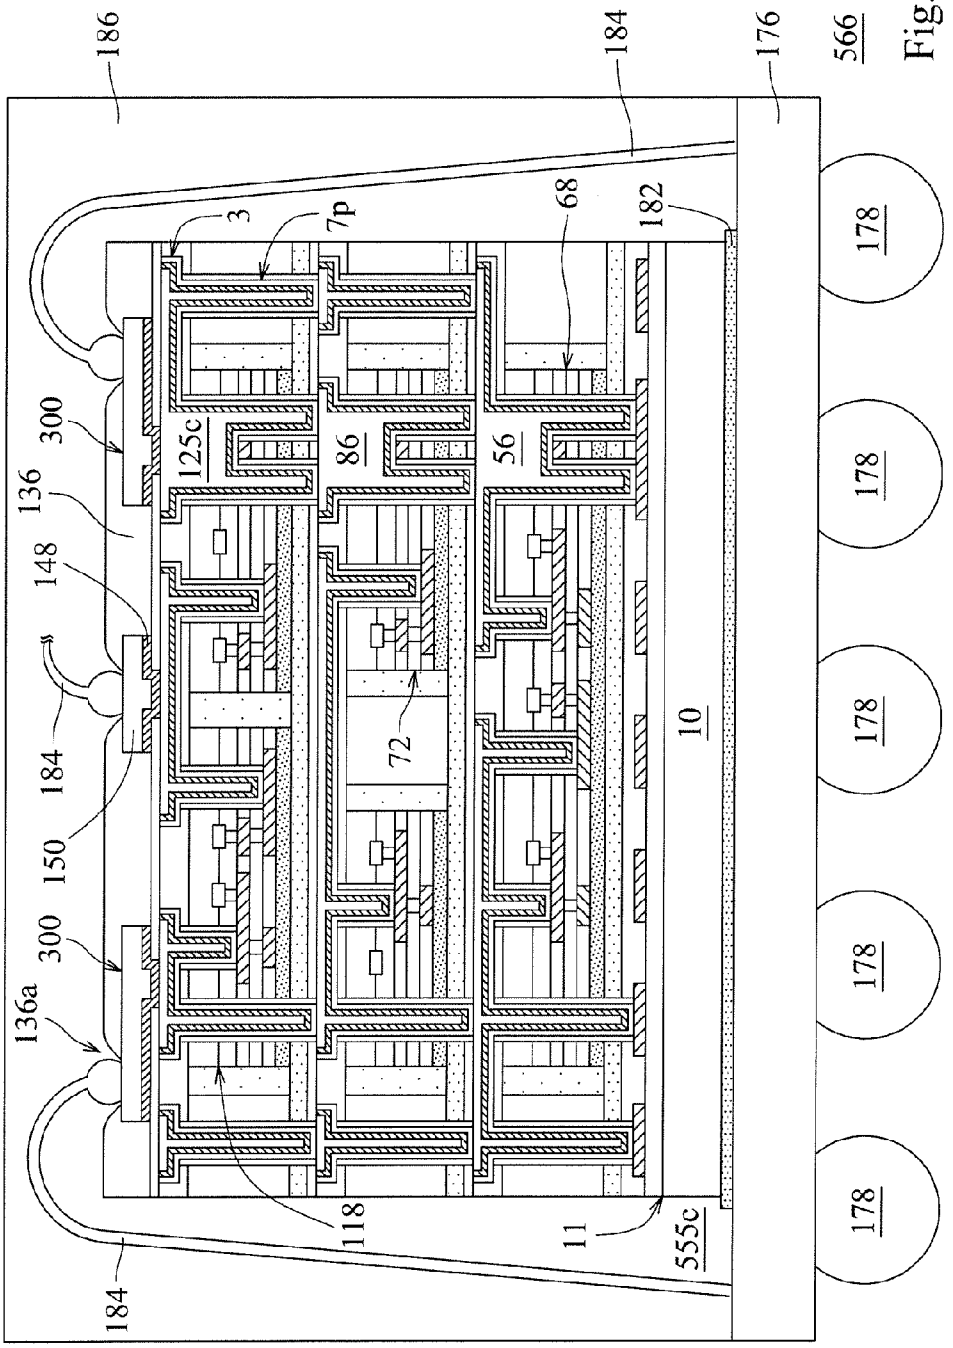

186
184
176
566
178
3
7p
68
182
300
125c
86
56
136
148
72
10
184
150
300
136a
118
11
555c
184

Fig. 88

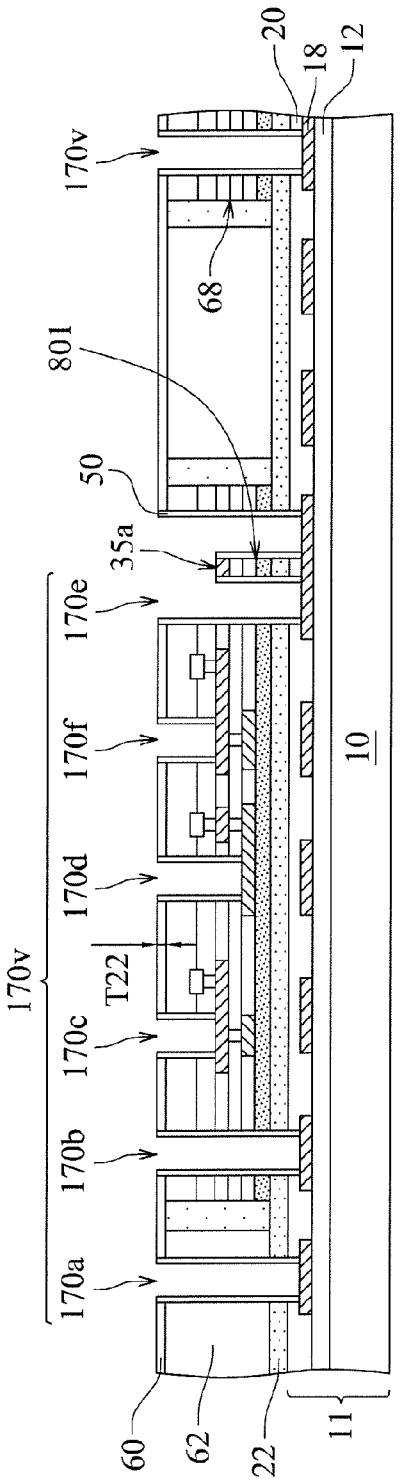

20
18
12
170v
68
801
50
35a
170e
170f
170d
T22
170c
170b
170a
170v
10
60
62
22
11

Fig. 89

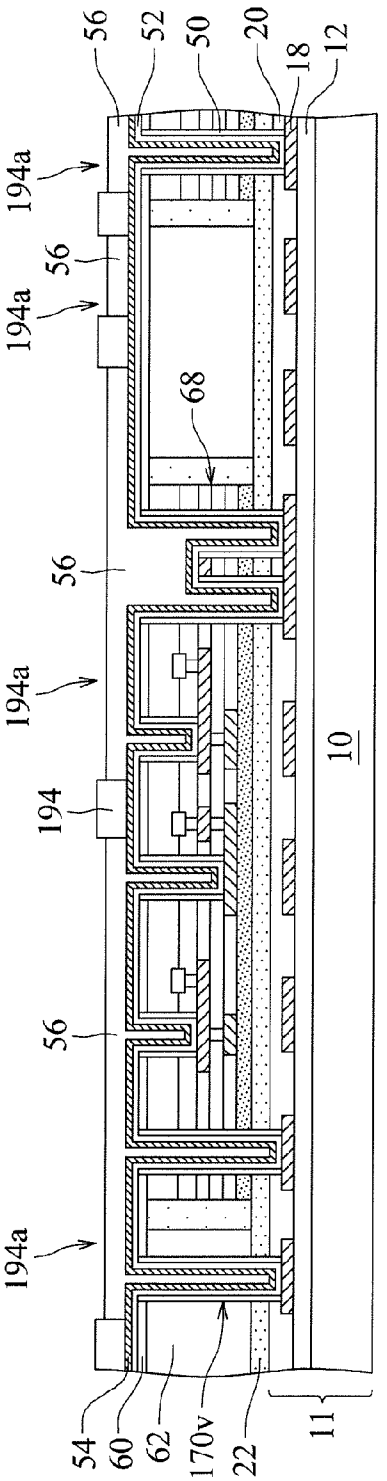

56
52
50
20
18
12
194a
56
194a
68
56
194a
194
56
194a
10
54
60
62
170v
22
11

Fig. 90

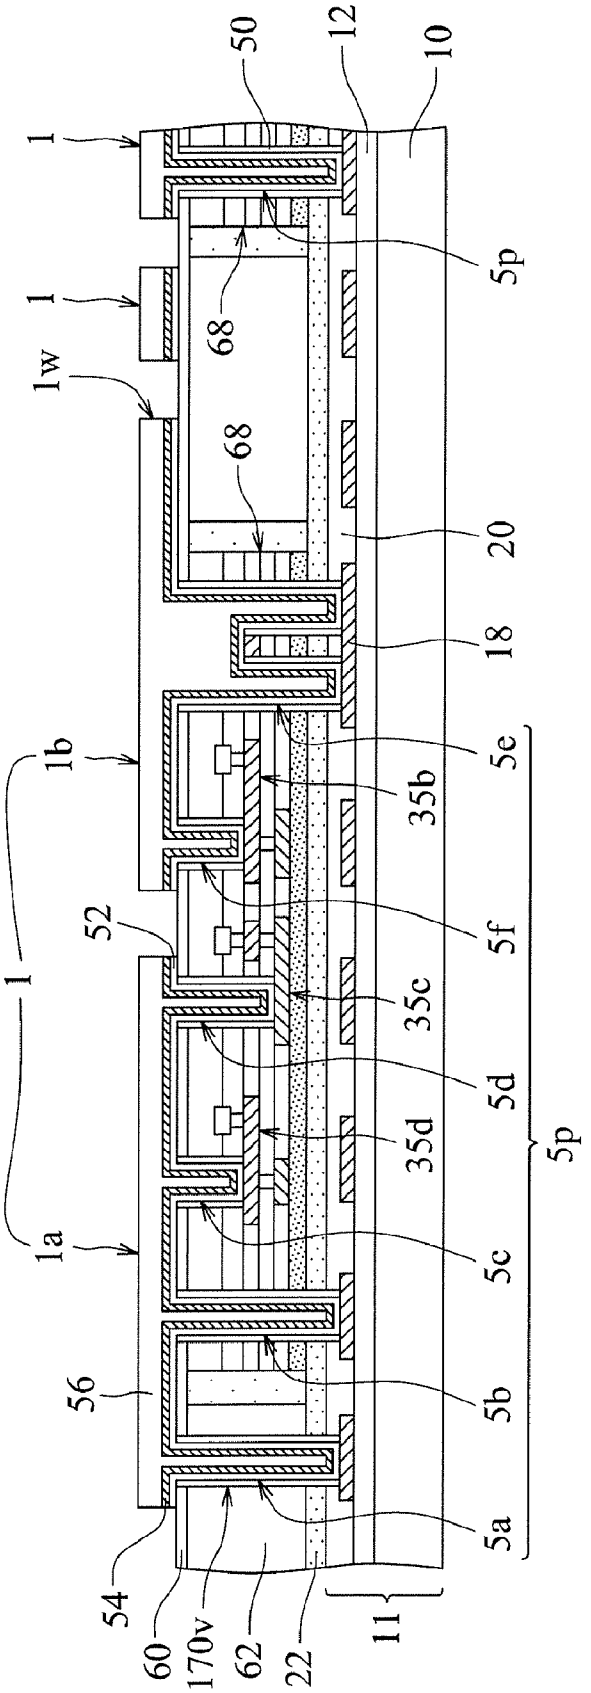

50
12
10
1
5p
1
68
1w
68
20
18
5e
1b
35b
52
5f
1
35c
5d
35d
5p
1a
5c
56
5b
5a
54
60
170v
62
22
11

Fig. 91

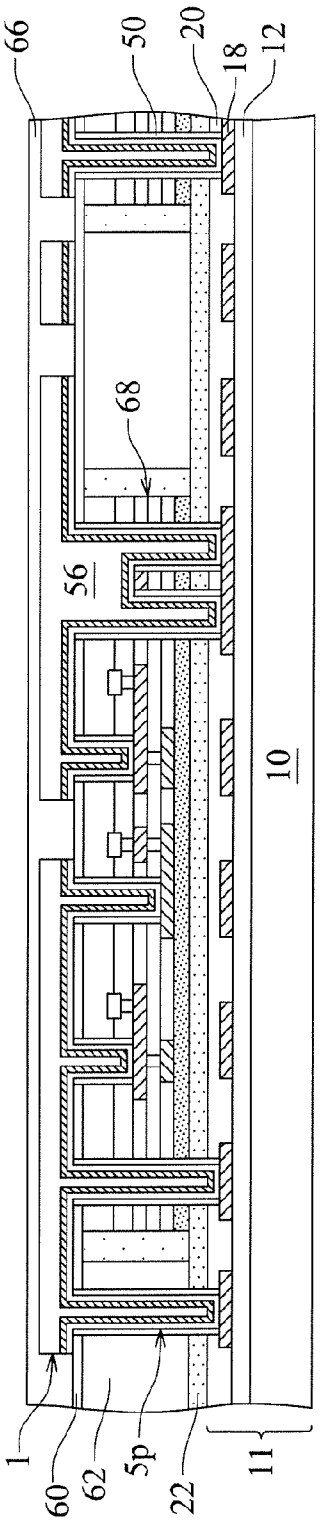

66
50
20
18
12
68
56
10
1
60
62
5p
22
11

Fig. 92

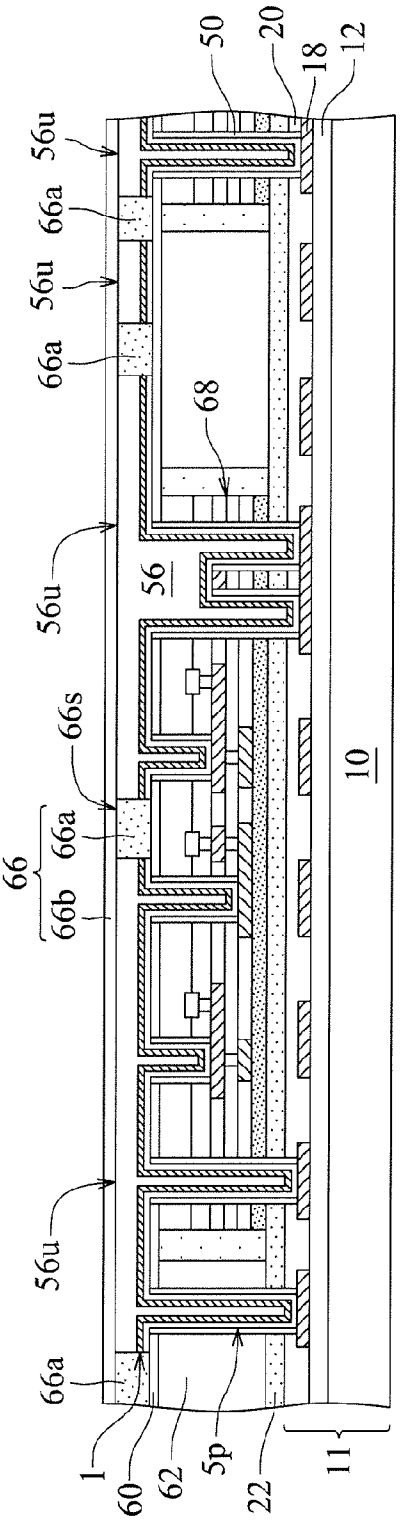

50
20
18
12
56u
66a
56u
66a
68
56u
56
66s
66
66a
66b
10
56u
66a
1
60
62
5p
22
11

Fig. 93

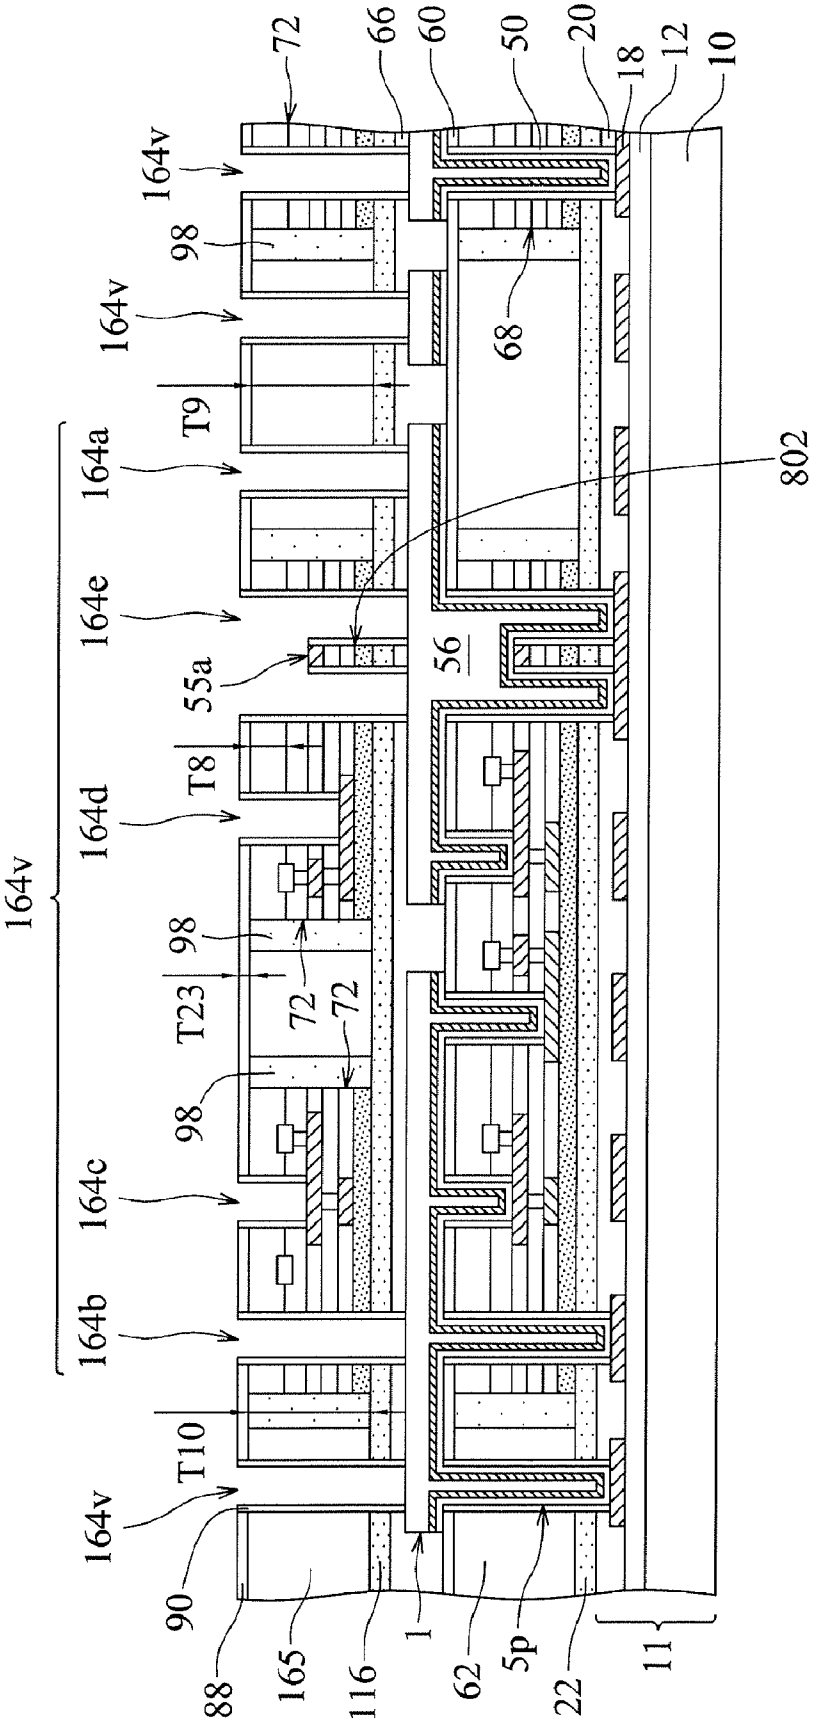

72
66
60
50
20
18
12
10
164v
98
68
164v
T9
164a
802
164e
55a
56
T8
164d
164v
98
T23
72
72
98
164c
164b
T10
164v
90
88
165
116
1
62
5p
22
11

Fig. 94

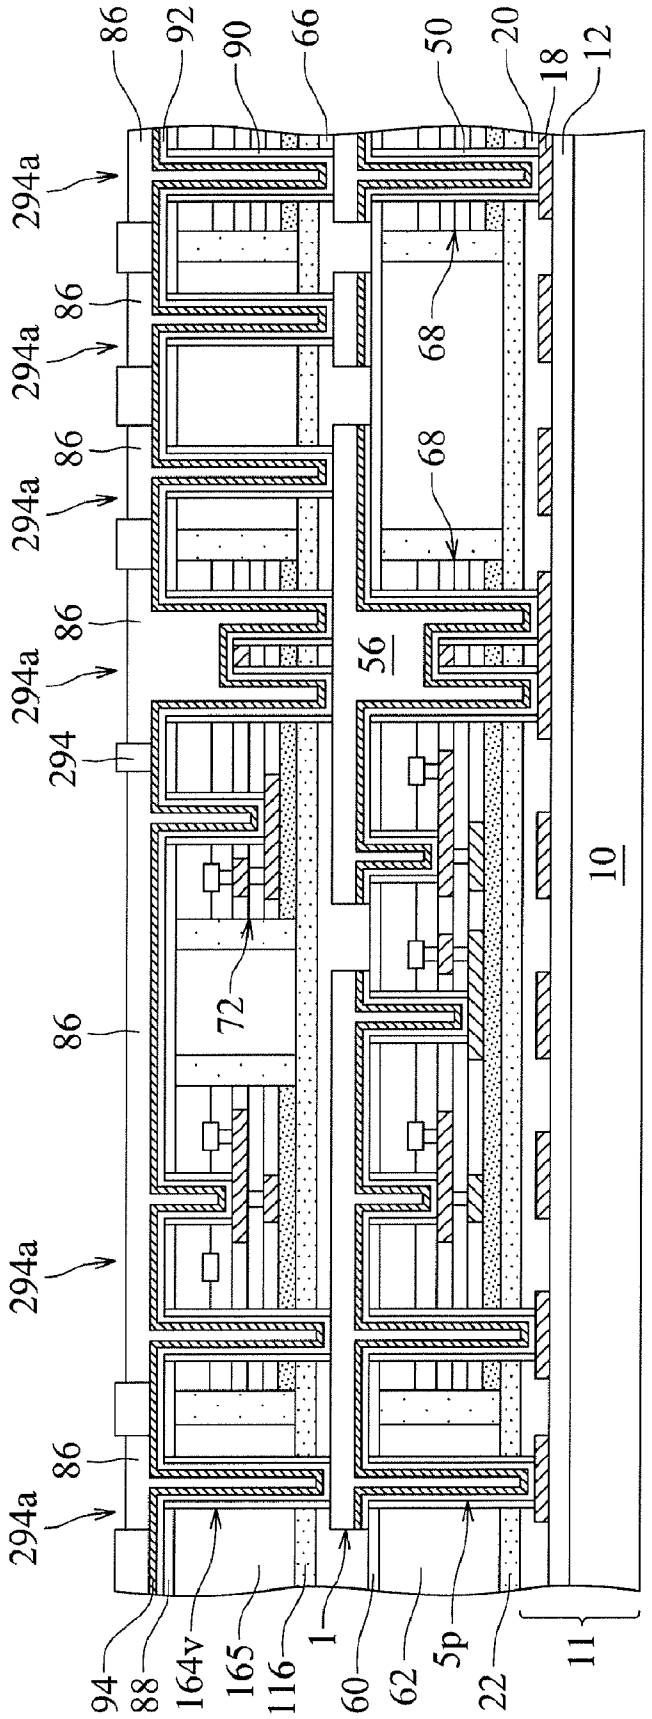

86
92
90
66
50
20
18
12
294a
86
294a
86
294a
86
294a
294
68
68
56
72
10
94
88
164v
165
116
1
60
62
5p
22
11

Fig. 95

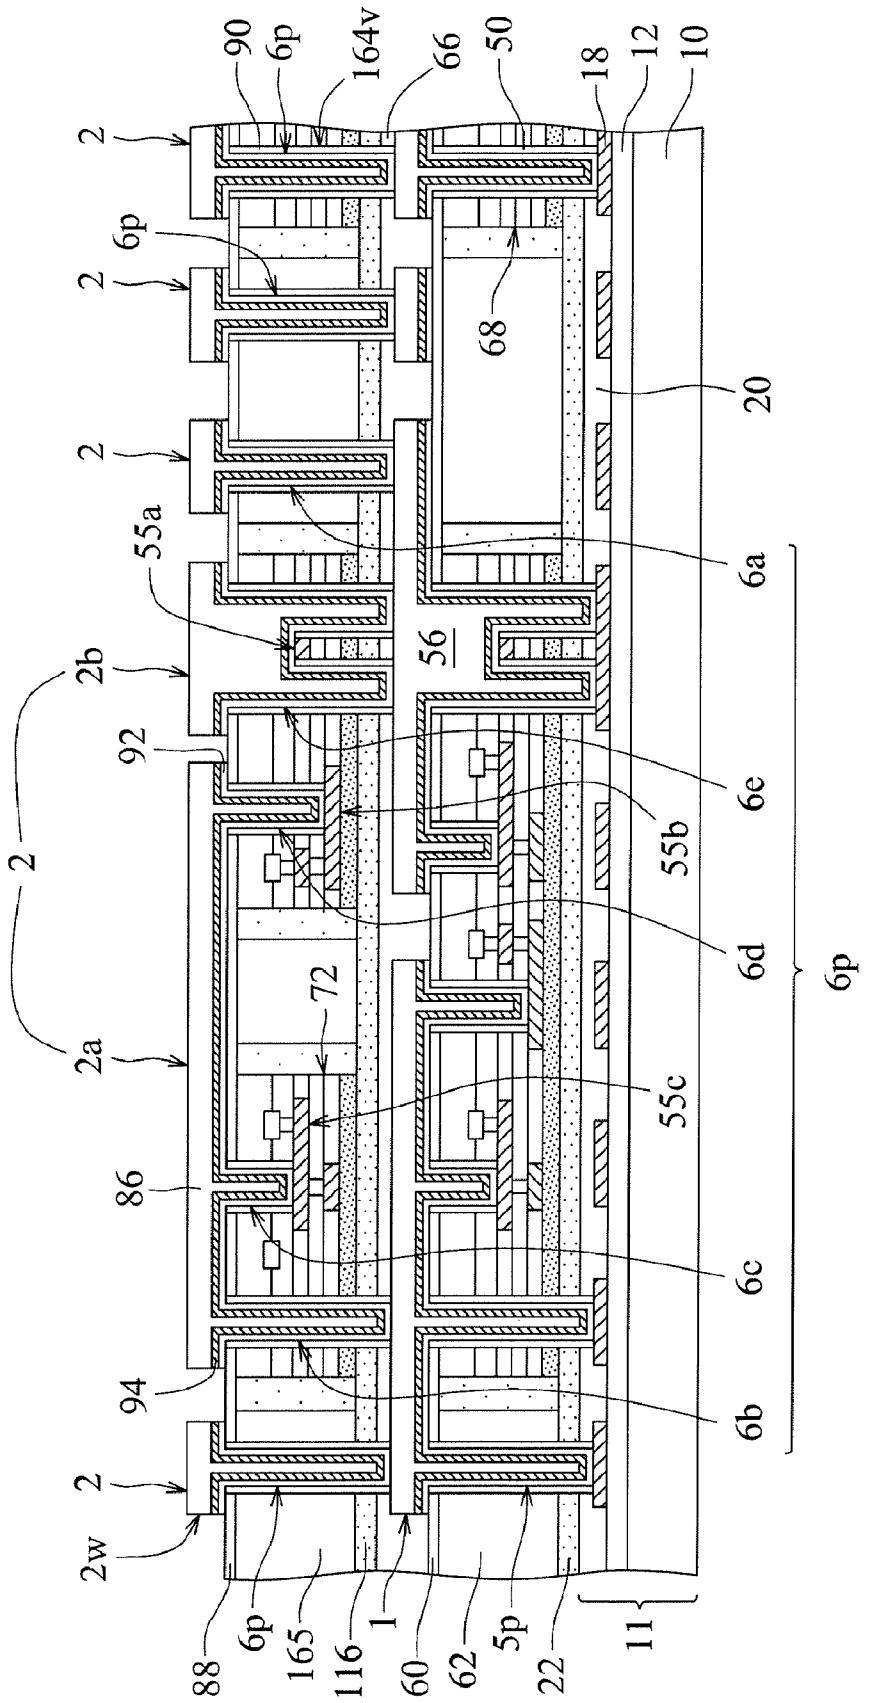

90
6p
164v
66
50
18
12
10
2
6p
2
68
20
2
55a
6a
56
2b
92
6e
55b
2
6d
6p
72
2a
55c
86
6c
94
6b
2
2w
88
6p
165
116
1
60
62
5p
22
11

Fig. 96

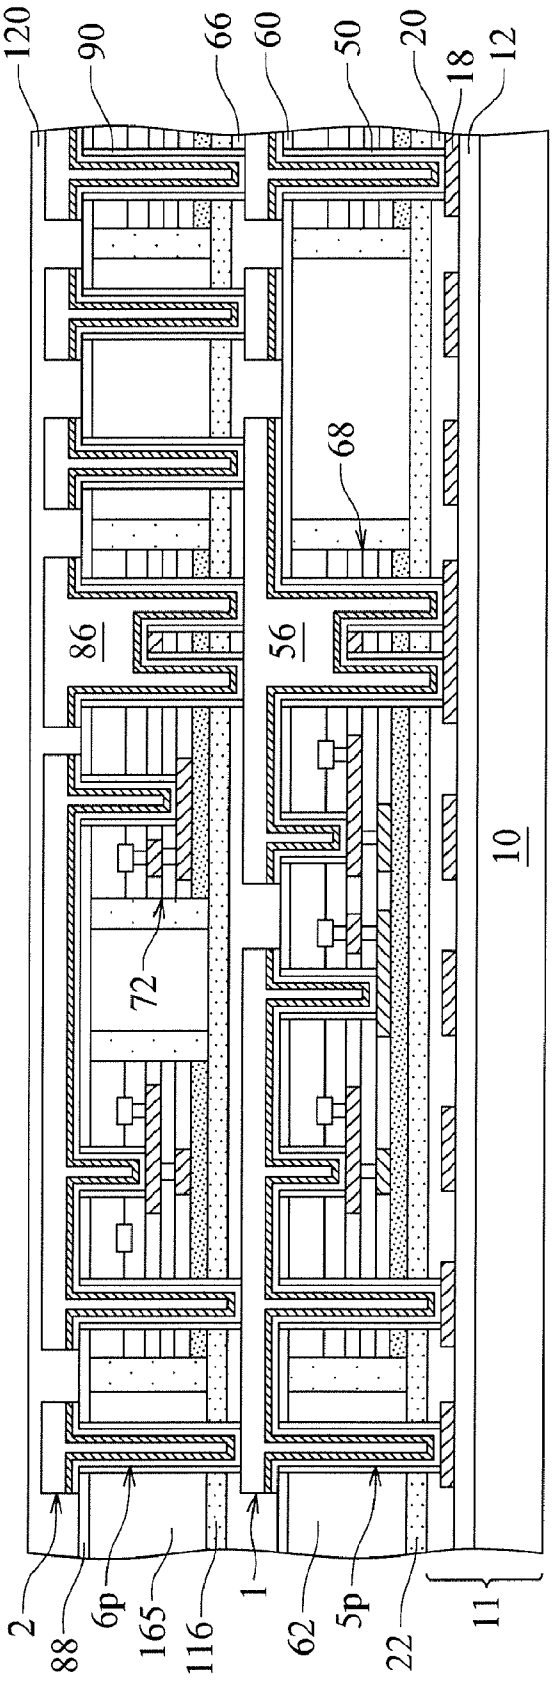


Fig. 97

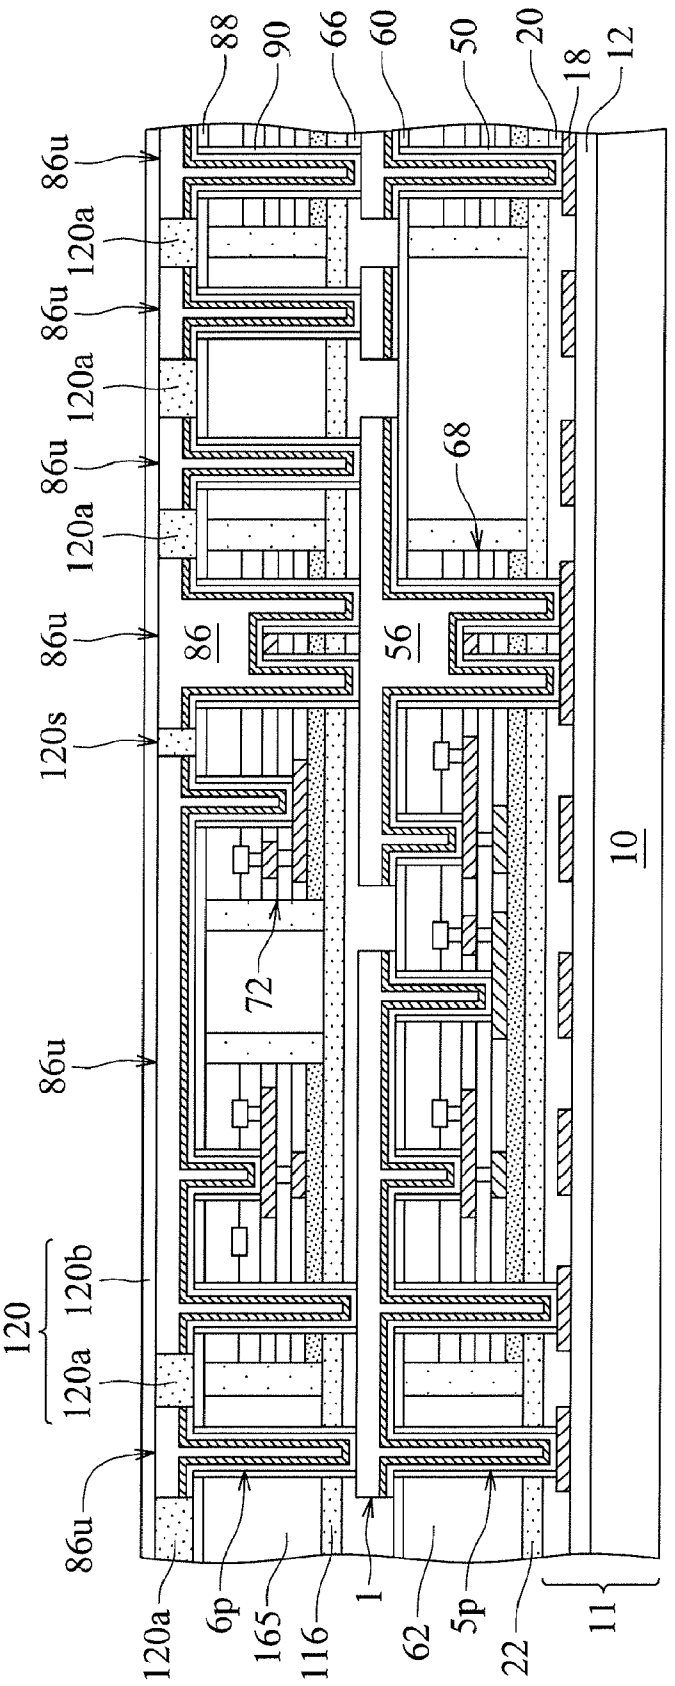

88
90
66
60
50
20
18
12
86u
120a
86u
120a
86u
120a
86u
120a
86u
120s
86u
120
120b
120a
86u
120a
6p
165
116
1
62
5p
22
11
10
72
68
86
56

Fig. 98

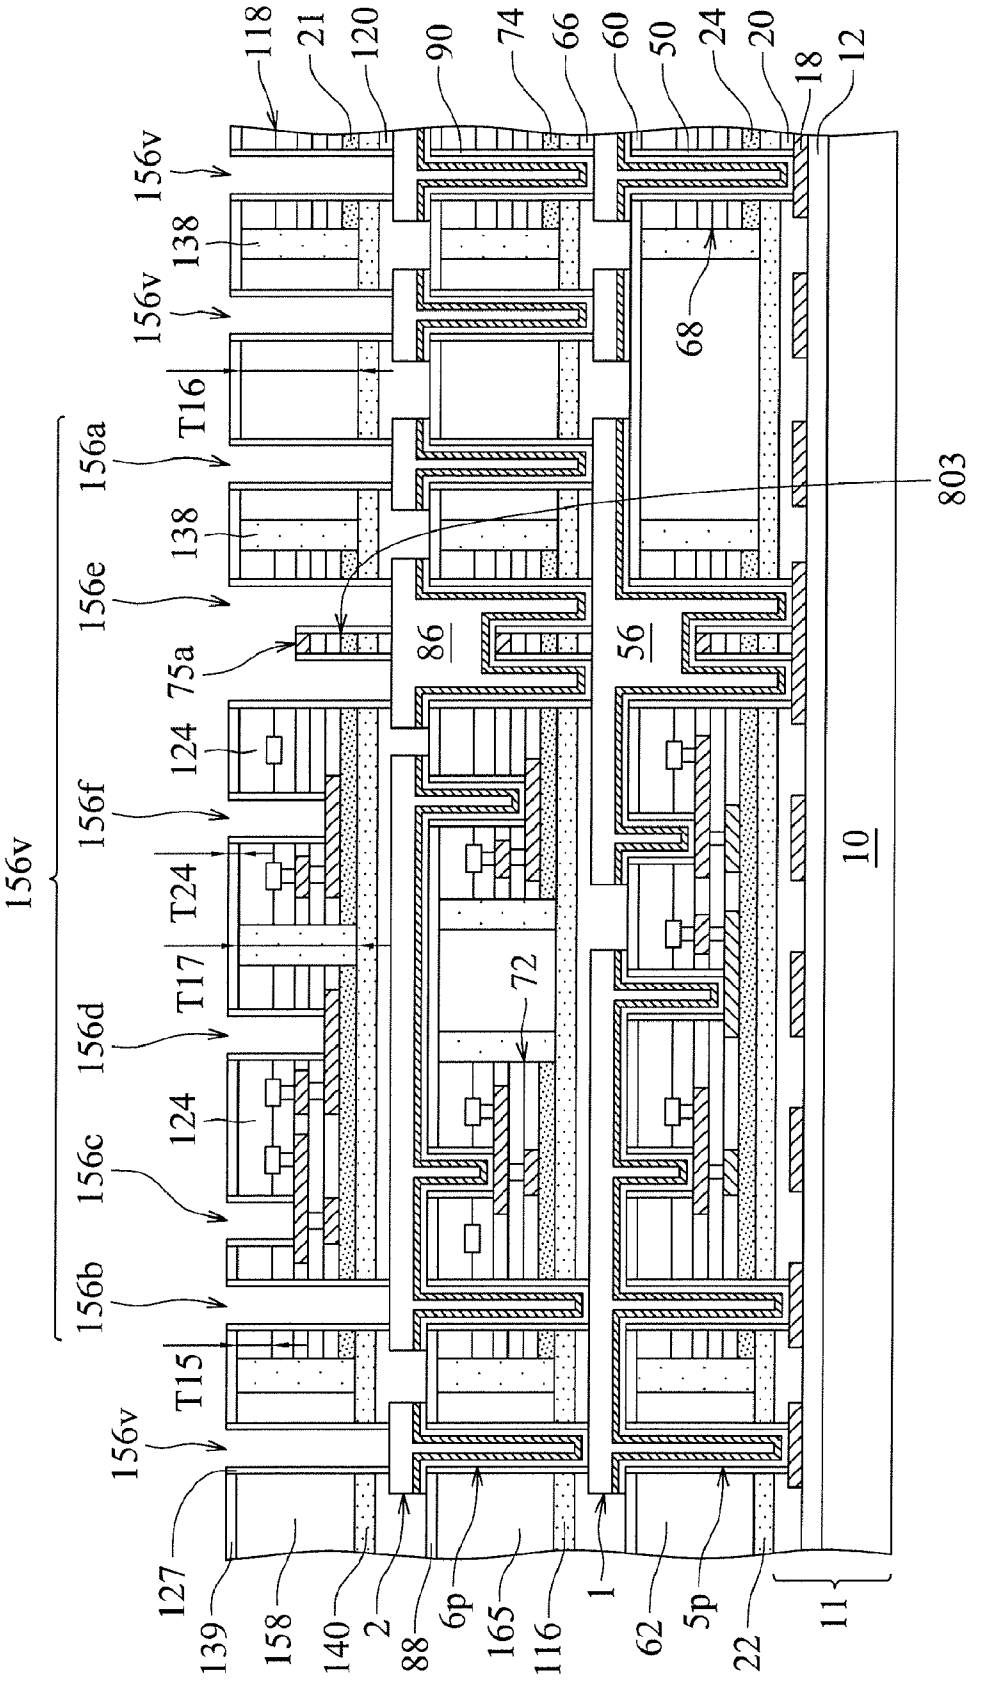

118
21
120
90
74
66
60
50
24
20
18
12
156v
138
156v
T16
156a
138
156e
75a
124
156f
T24
T17
156d
124
156c
156b
T15
156v
127
139
158
140
2
88
6p
165
116
1
62
5p
22
11
10
56
86
72
68
803

Fig. 99

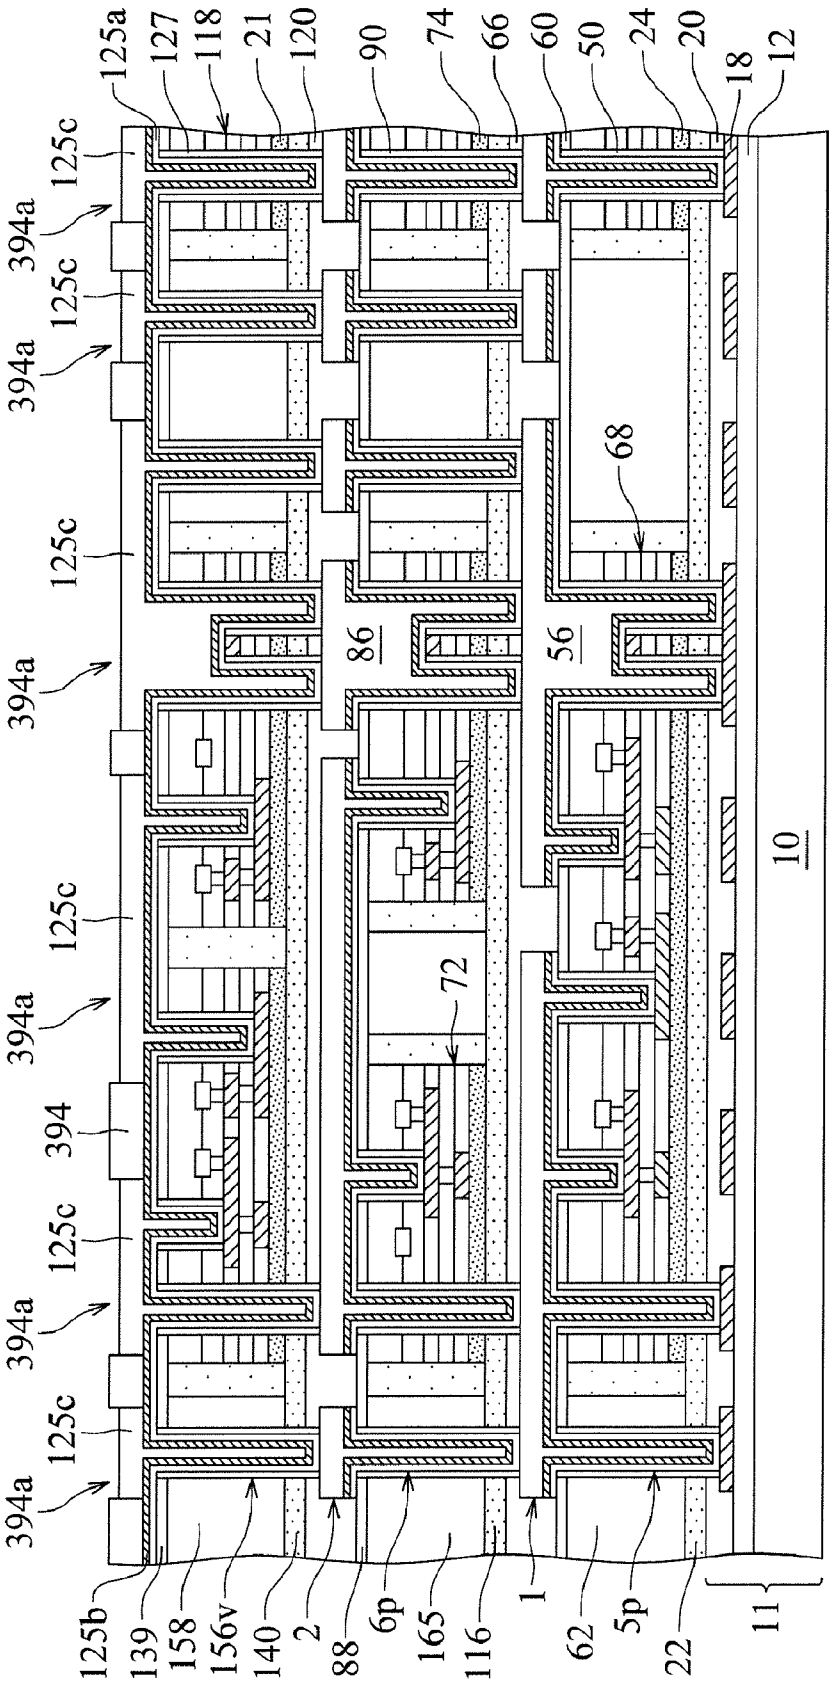

125a
127
118
21
120
90
74
66
60
50
24
20
18
12
125c
394a
125c
394a
125c
68
394a
125c
86
56
394a
125c
72
394a
394
125c
394a
125c
394a
10
125b
139
158
156v
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 100

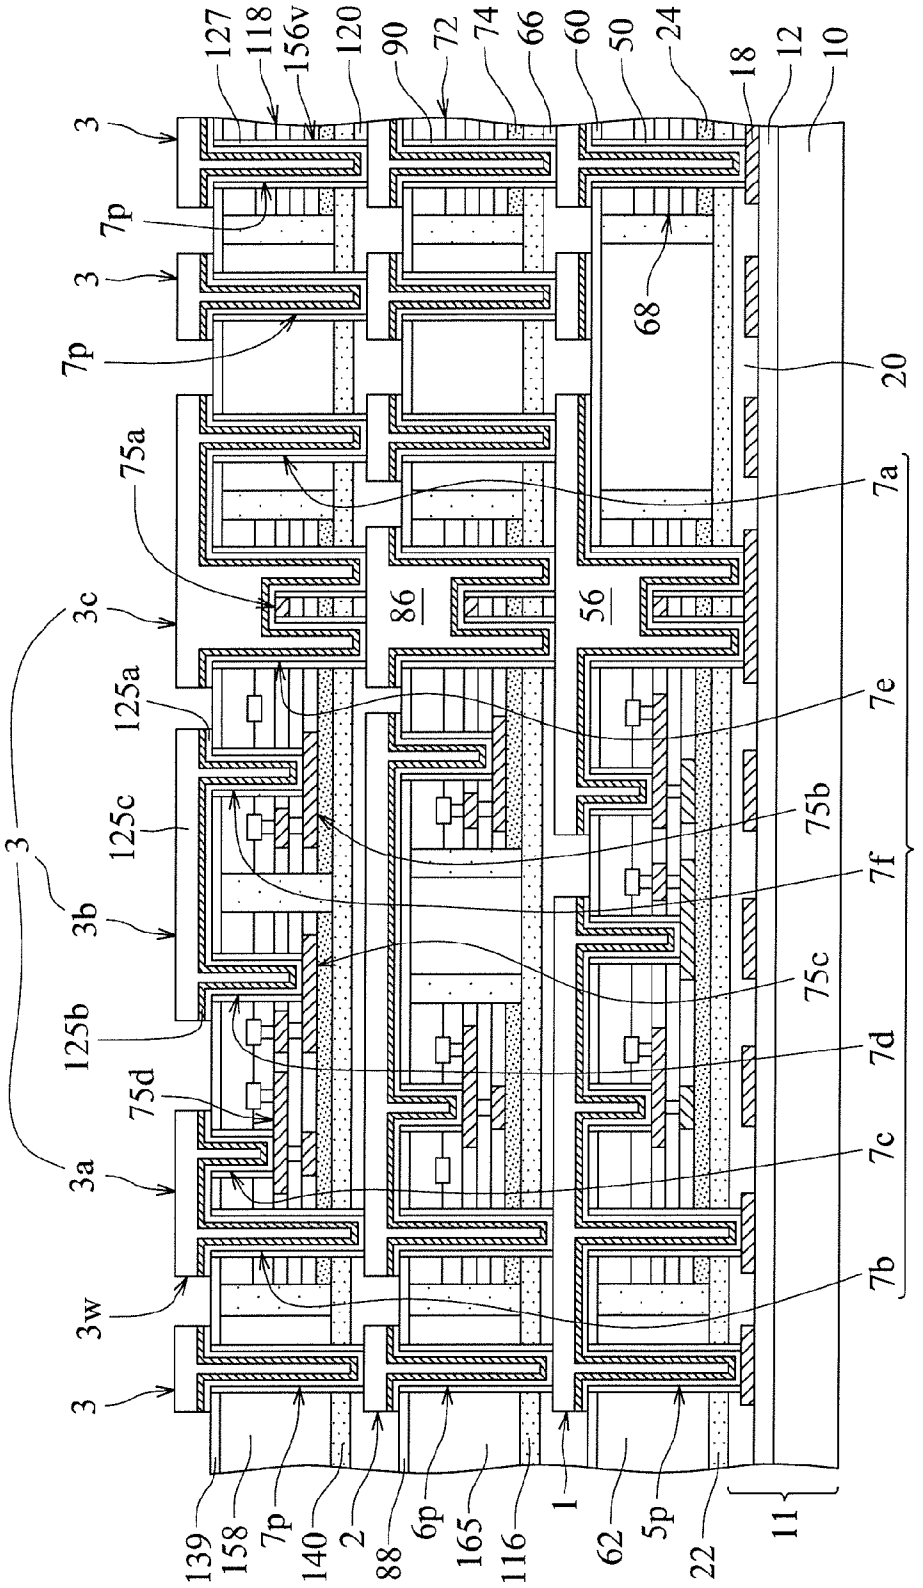

127
118
156v
120
90
72
74
66
60
50
24
18
12
10
3
7p
3
7p
68
20
75a
7a
3c
86
56
125a
7e
125c
75b
3
3b
7f
7p
75c
125b
7d
75d
3a
7c
3w
7b
3
139
158
7p
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 101

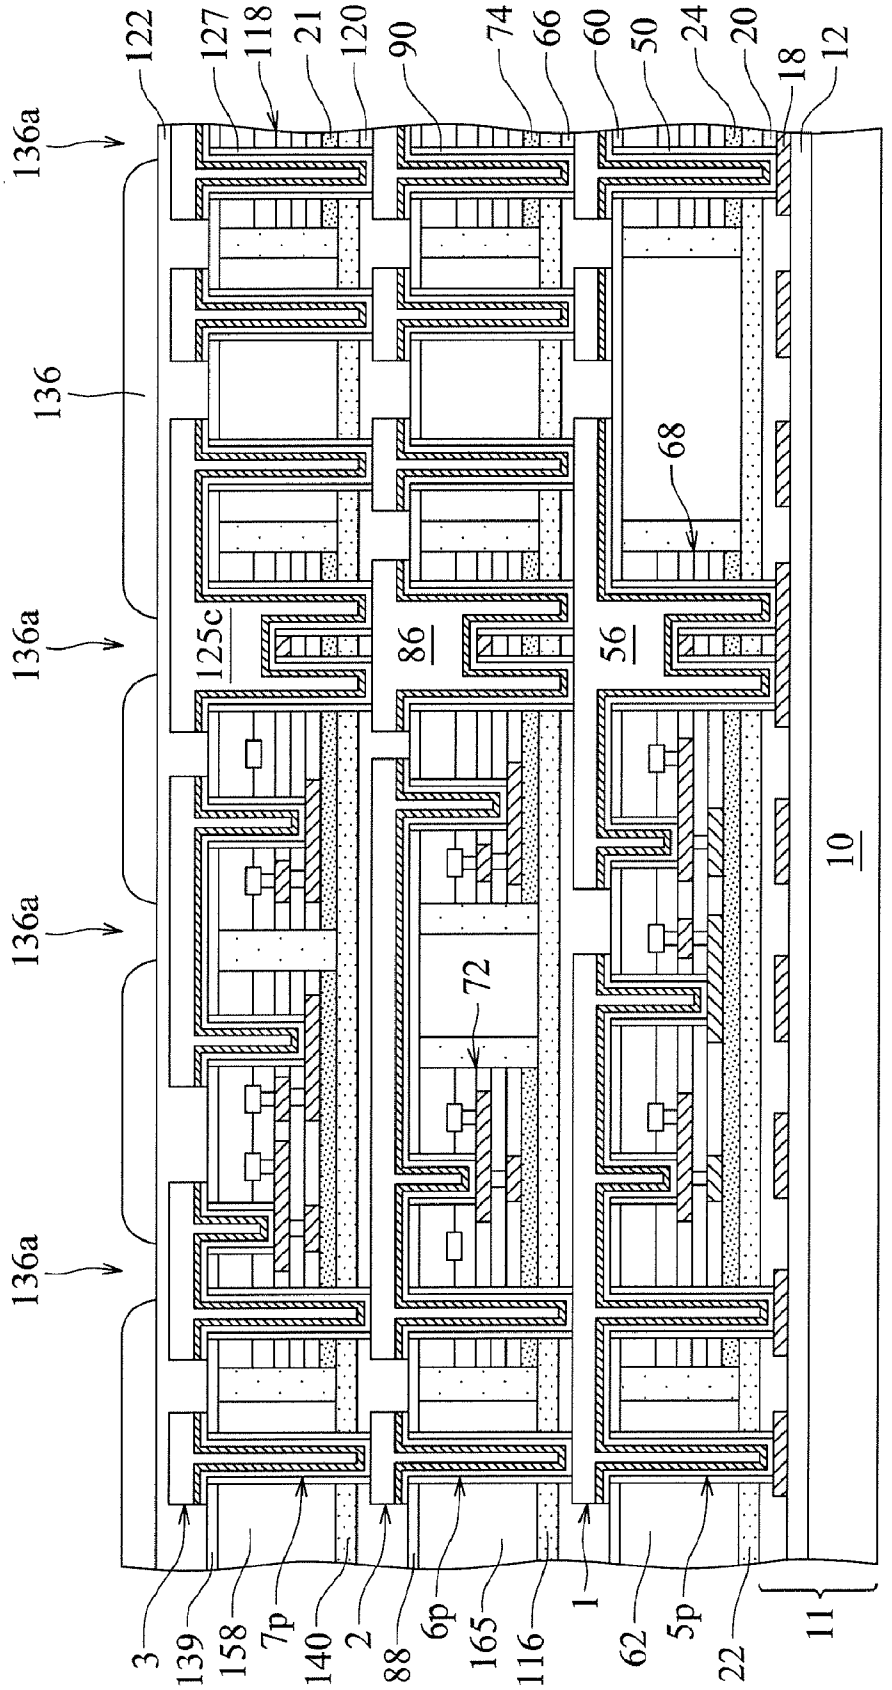

122
127
118
21
120
90
74
66
60
50
24
20
18
12
136a
136
136a
136a
136a
68
125c
86
56
72
10
3
139
158
7p
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 102

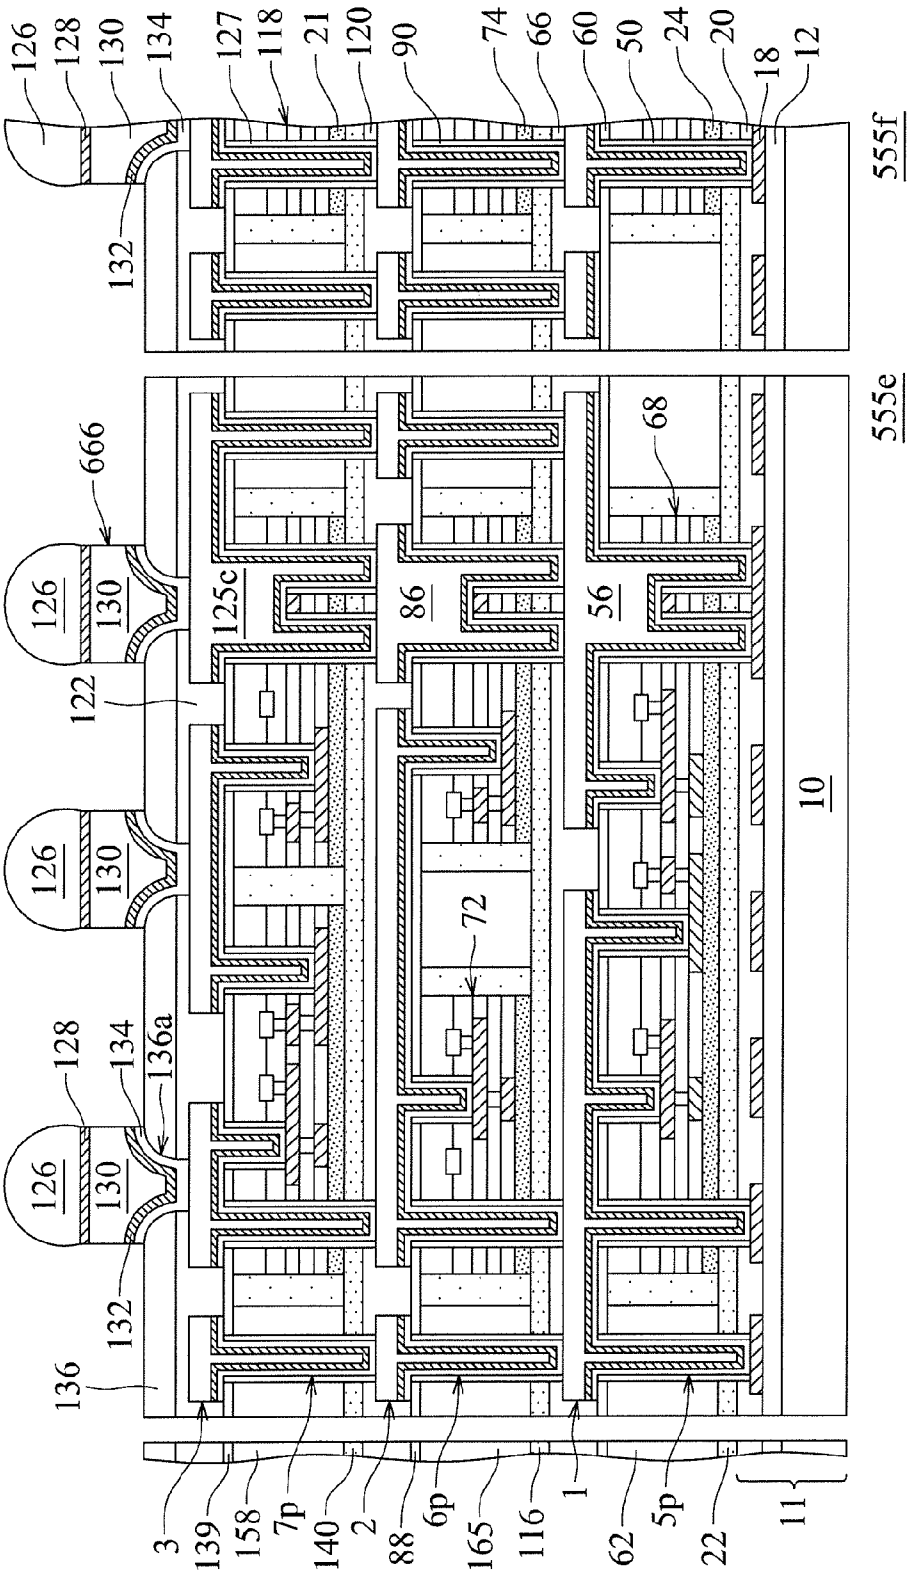

126
128
130
134
127
118
21
120
90
74
66
60
50
24
20
18
12
555f
132
555e
666
68
126
130
125c
86
56
122
10
72
136a
136
3
139
158
7p
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 103

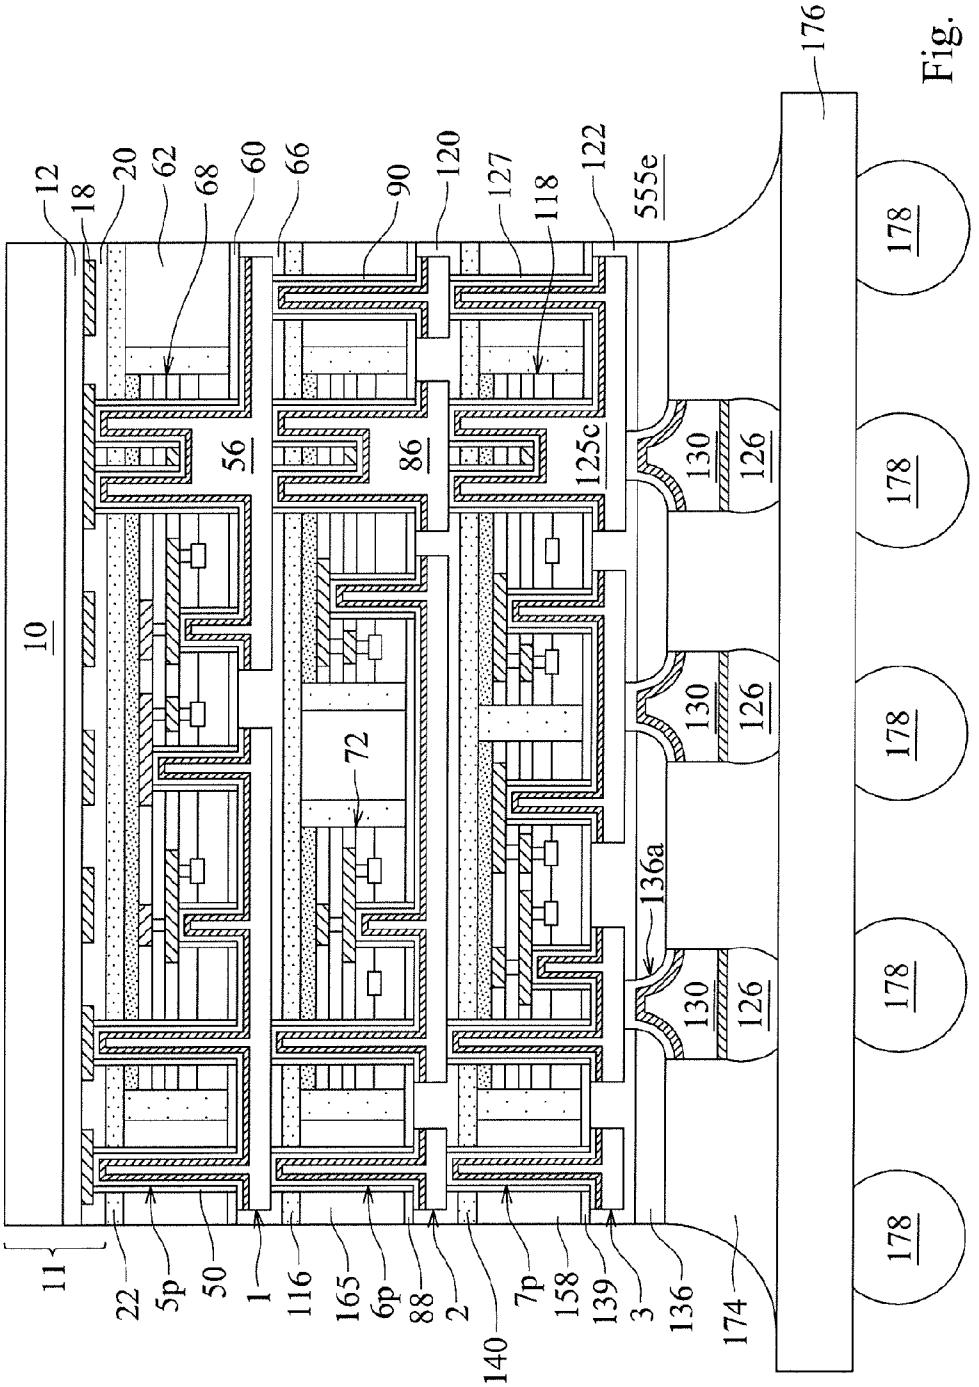

12
18
20
62
68
60
66
90
120
127
118
122
555e
176
178
56
86
125c
130
126
72
136a
10
11
22
5p
50
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 104

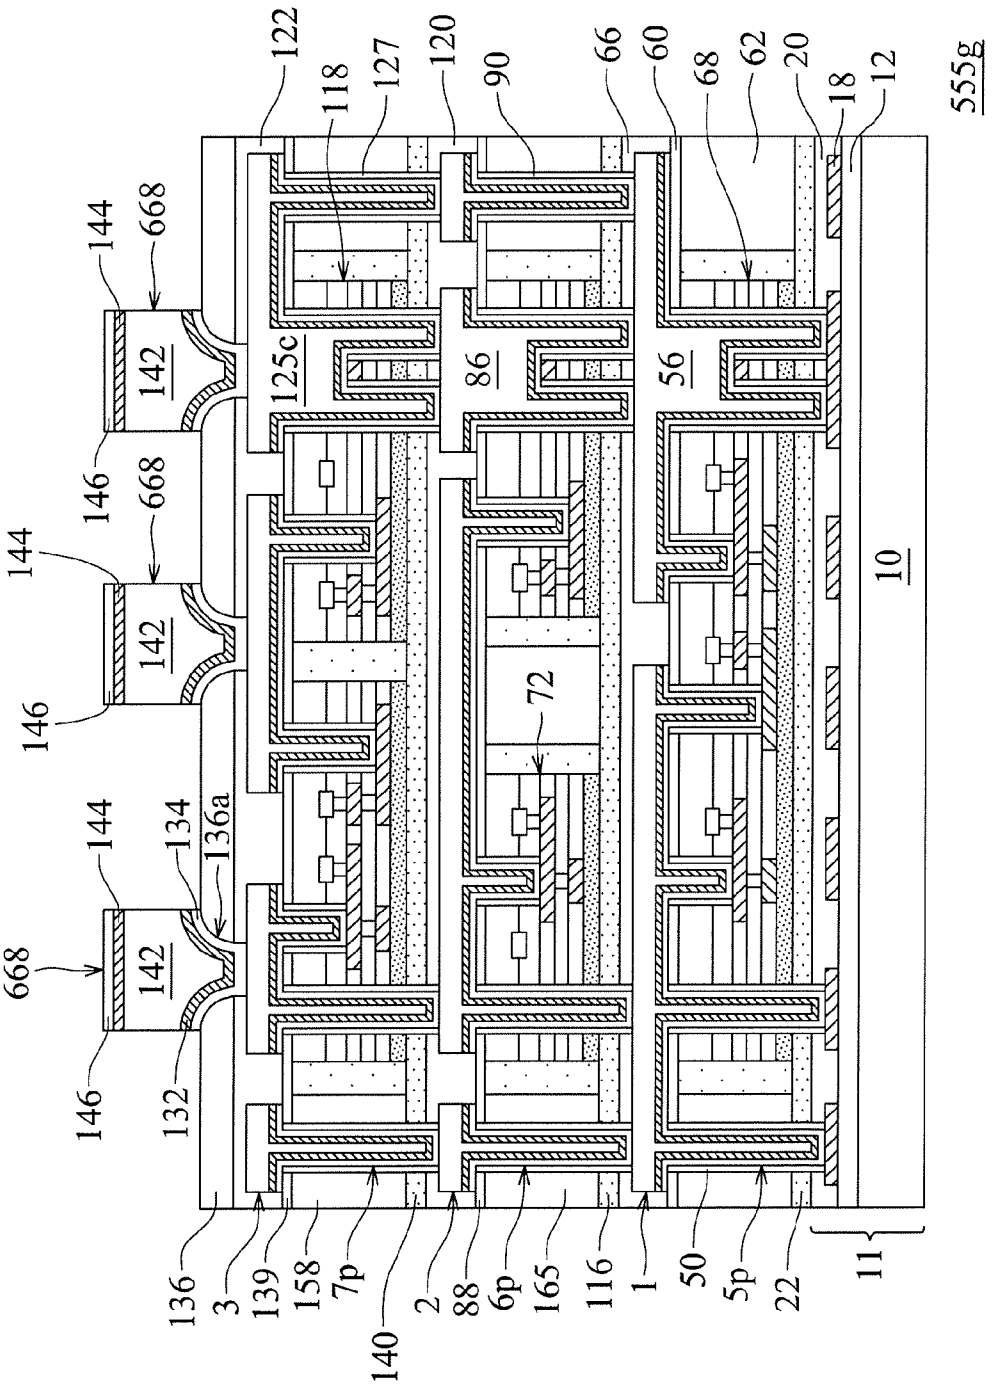

555g
122
118
127
120
90
66
60
68
62
20
18
12
144
668
142
146
125c
86
56
72
10
134
136a
132
136
3
139
158
7p
140
2
88
6p
165
116
1
50
5p
22
11

Fig. 105

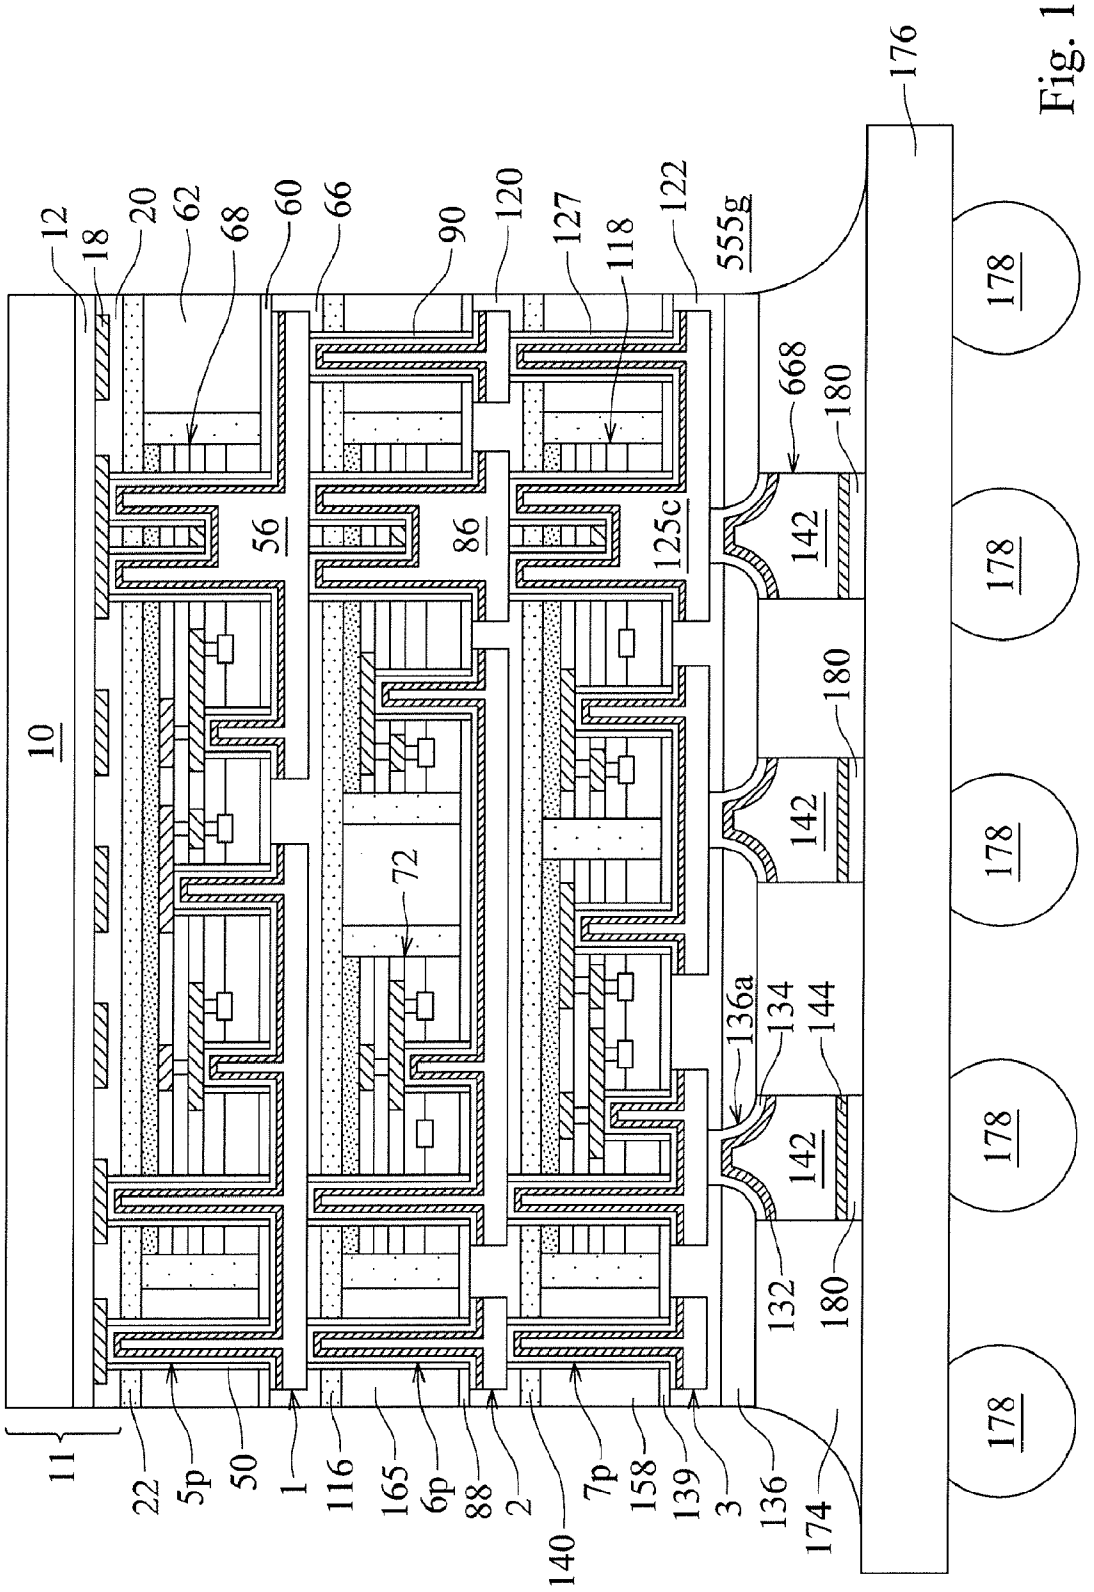

12
18
20
62
68
60
66
90
120
127
118
122
555g
176
178
668
180
142
56
86
125c
10
72
136a
134
144
132
11
22
5p
50
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 106

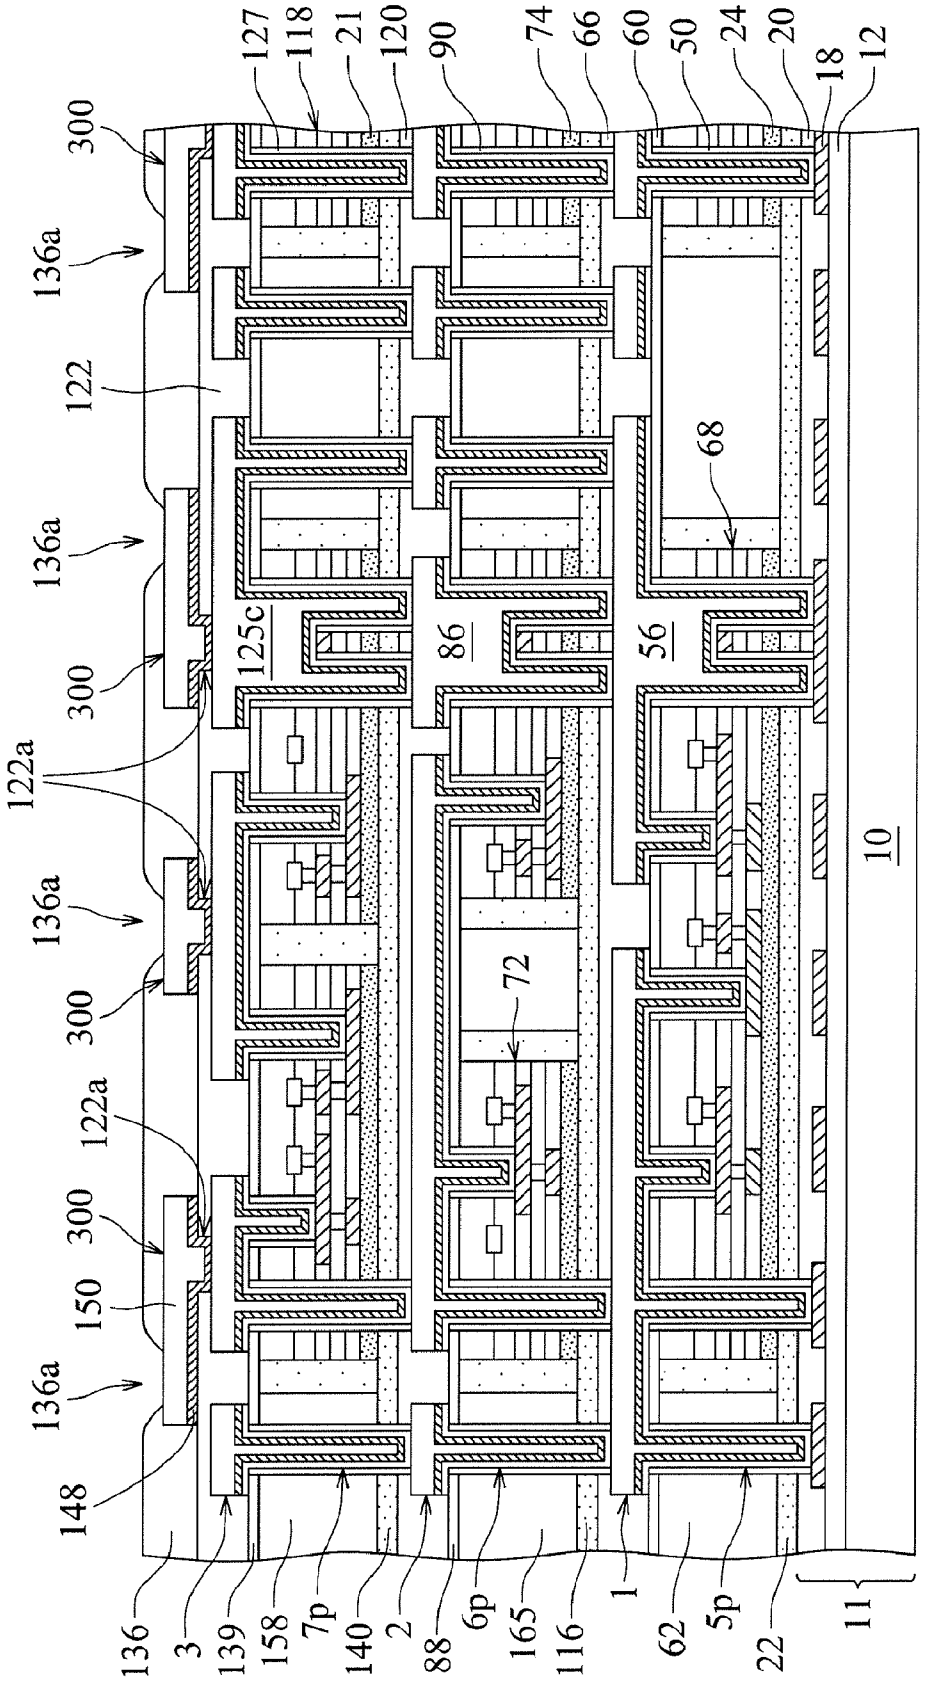

127
118
21
120
90
74
66
60
50
24
20
18
12
300
136a
122
68
125c
86
56
122a
72
10
148
150
136
3
139
158
7p
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 107

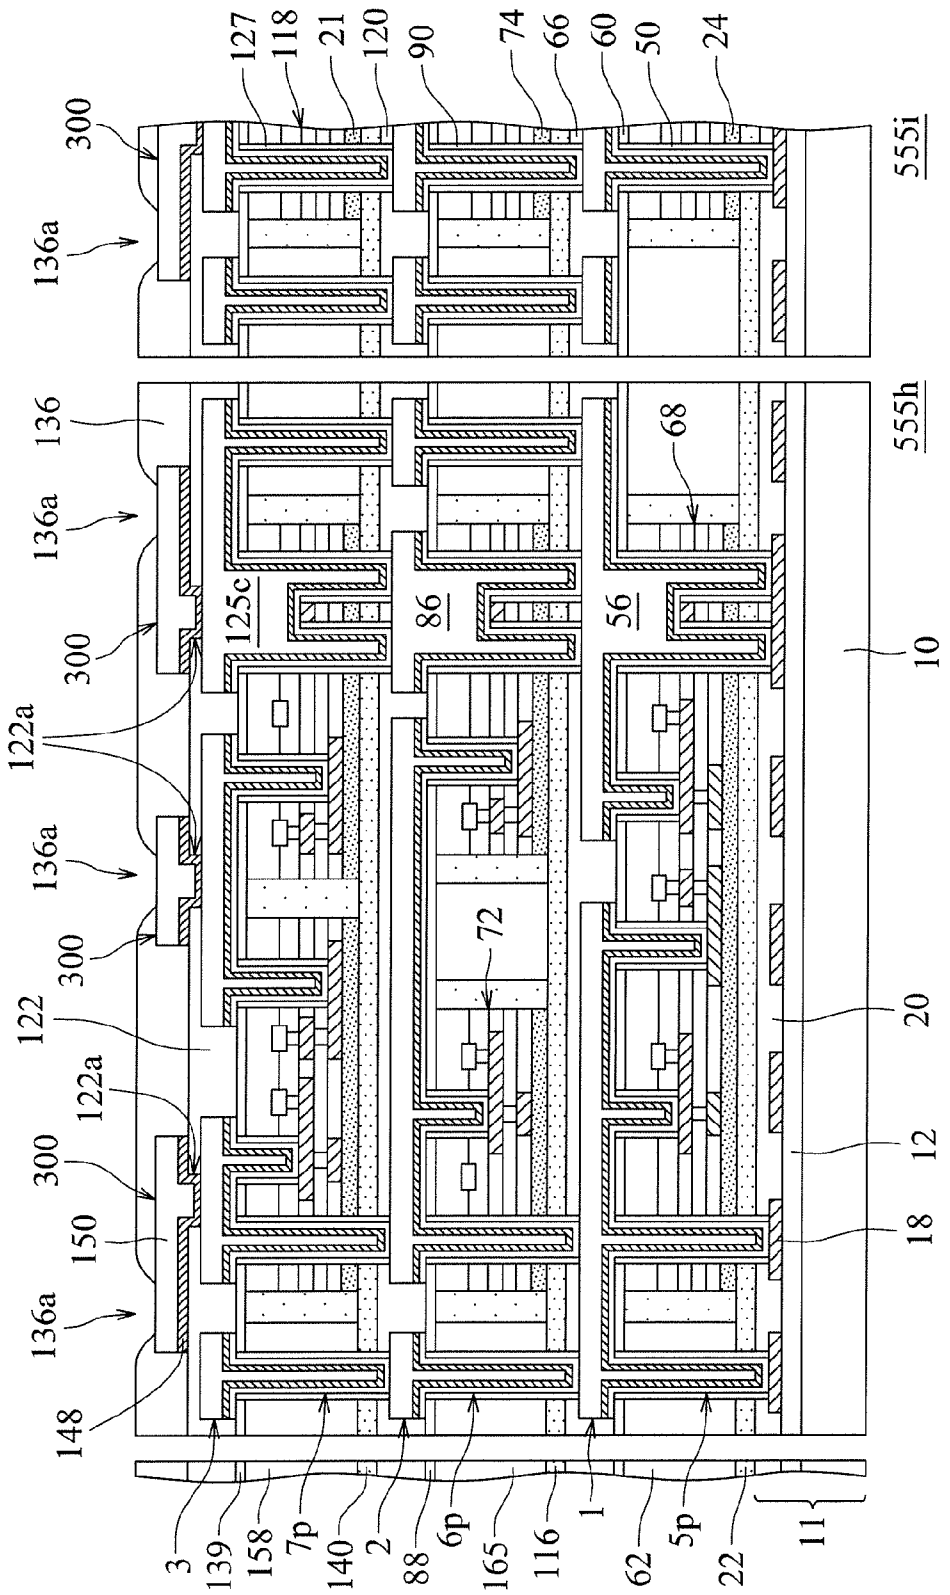

127
118
21
120
90
74
66
60
50
24
555i
300
136a
136
555h
68
125c
86
56
10
122a
72
122
20
12
18
150
148
3
139
158
7p
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 108

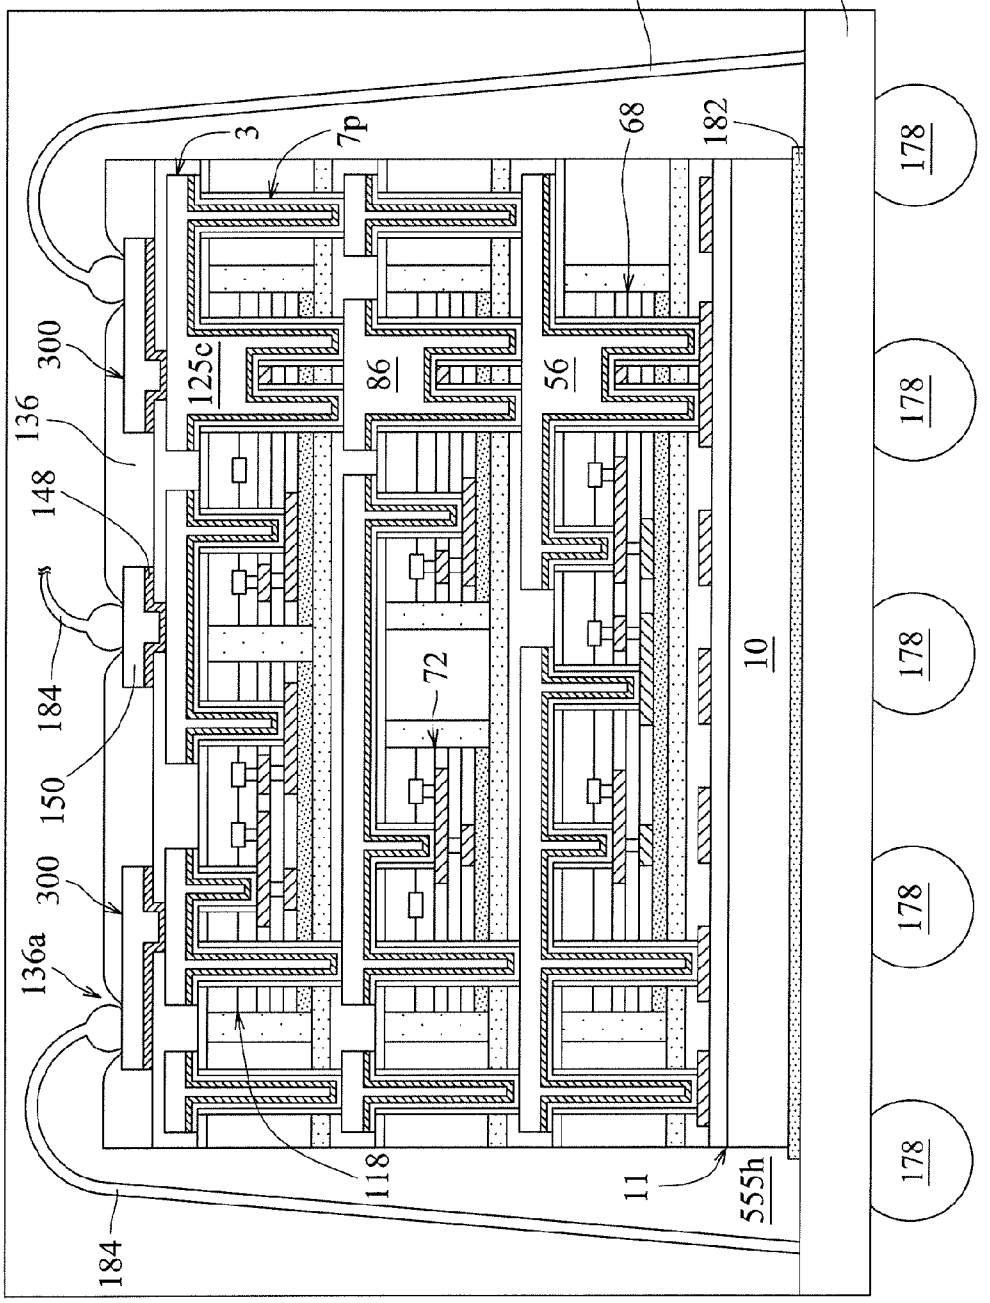

184
176
566a
3
7p
68
182
178
300
125c
86
56
136
148
184
72
10
150
300
136a
118
11
555h
184

Fig. 109

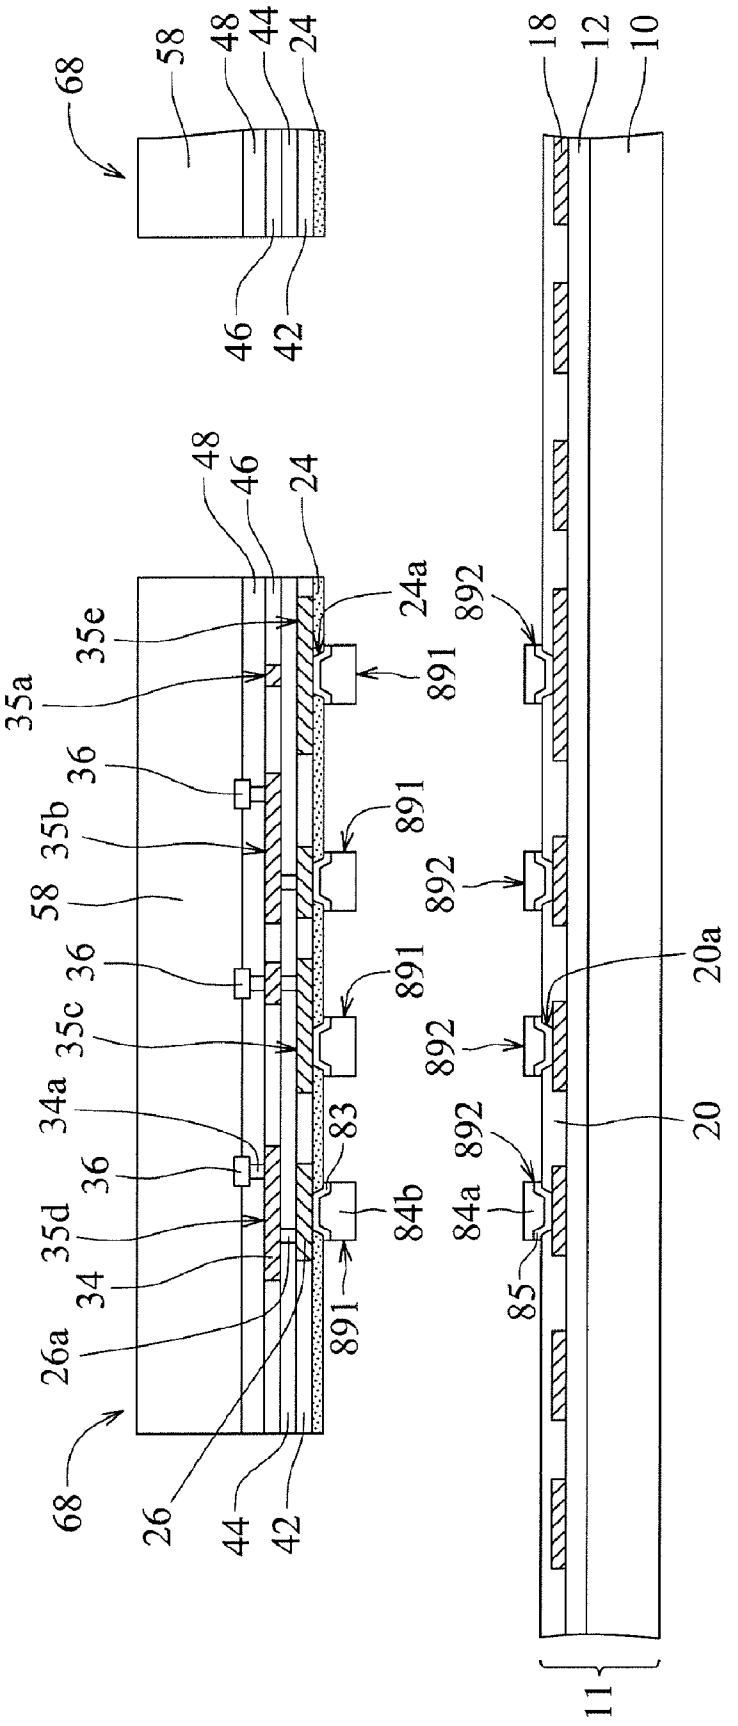

68
58
48
44
24
46
42
18
12
10
48
46
24
24a
892
35e
891
35a
36
891
35b
892
58
36
891
35c
892
20a
34a
83
892
36
84b
84a
35d
85
34
891
26a
20
68
26
44
42
11

Fig. 110

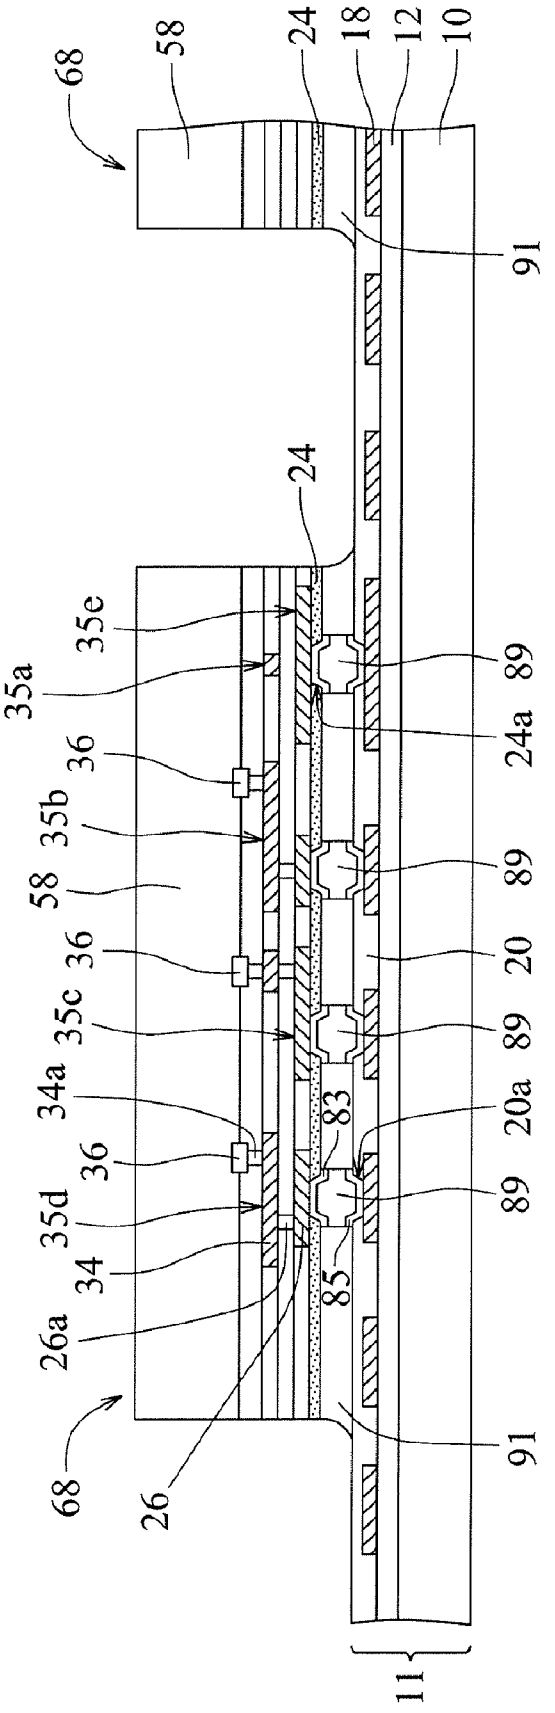

68
58
24
18
12
10
91
24
35e
35a
89
24a
36
35b
58
89
36
20
35c
89
34a
83
20a
36
35d
89
34
85
26a
91
68
26
11

Fig. 111

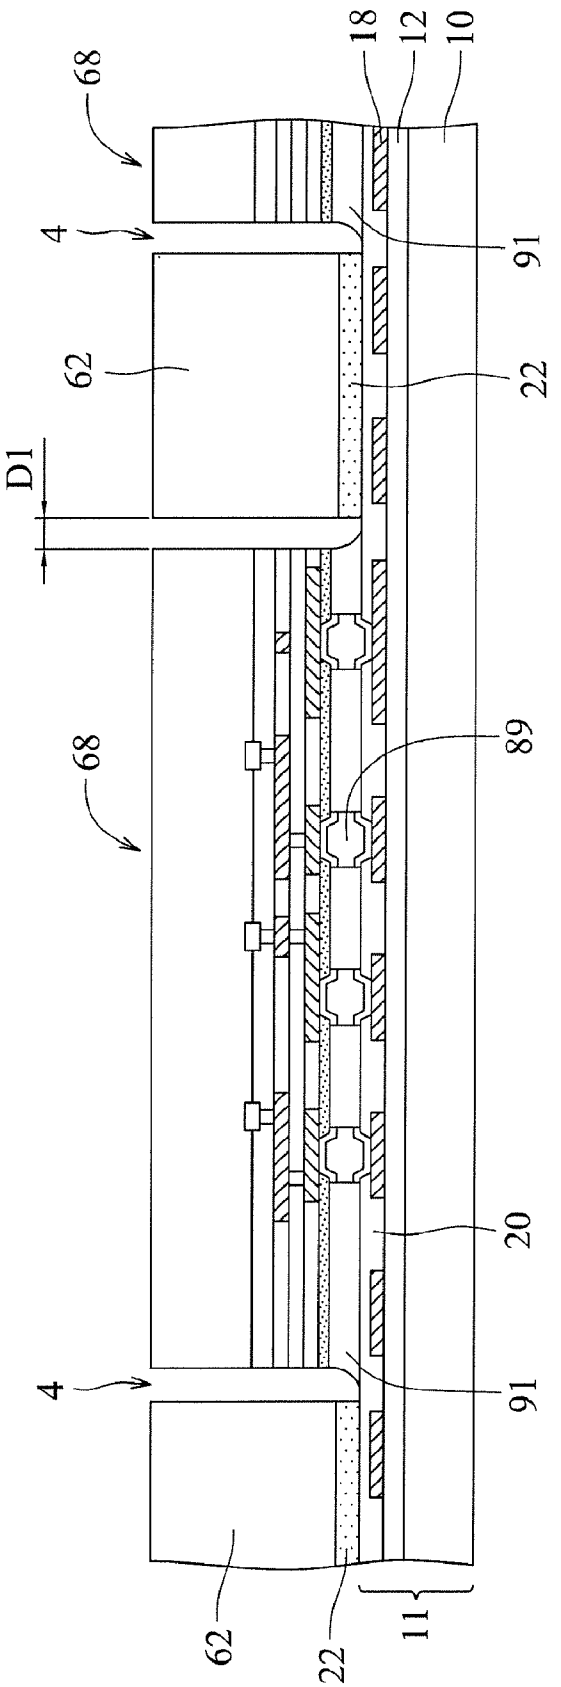


Fig. 112

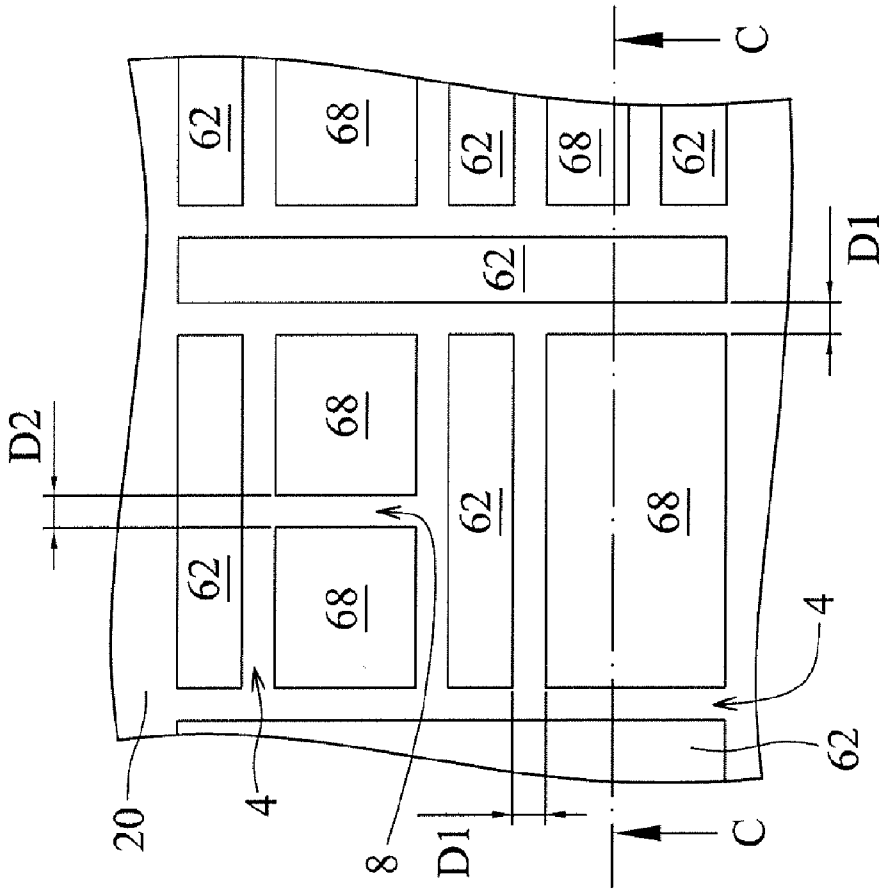


Fig. 113

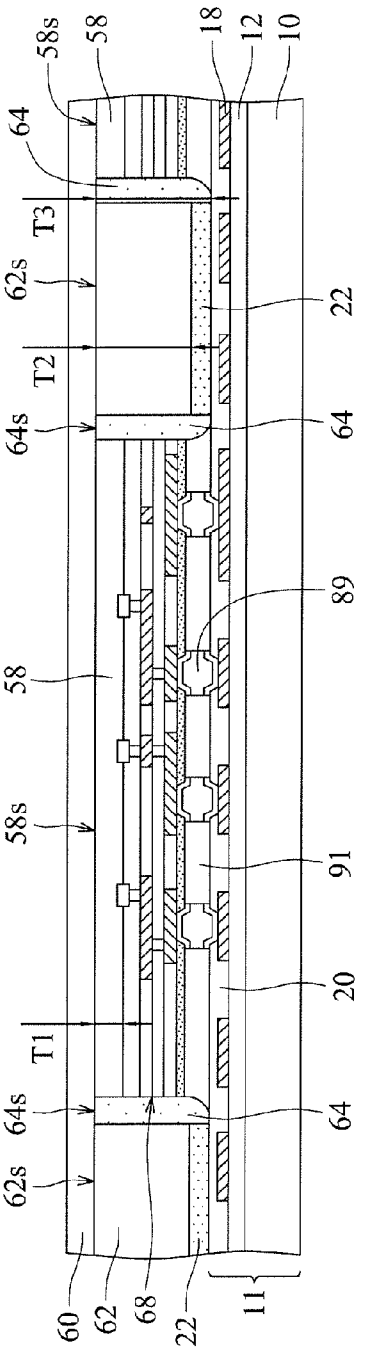


Fig. 114

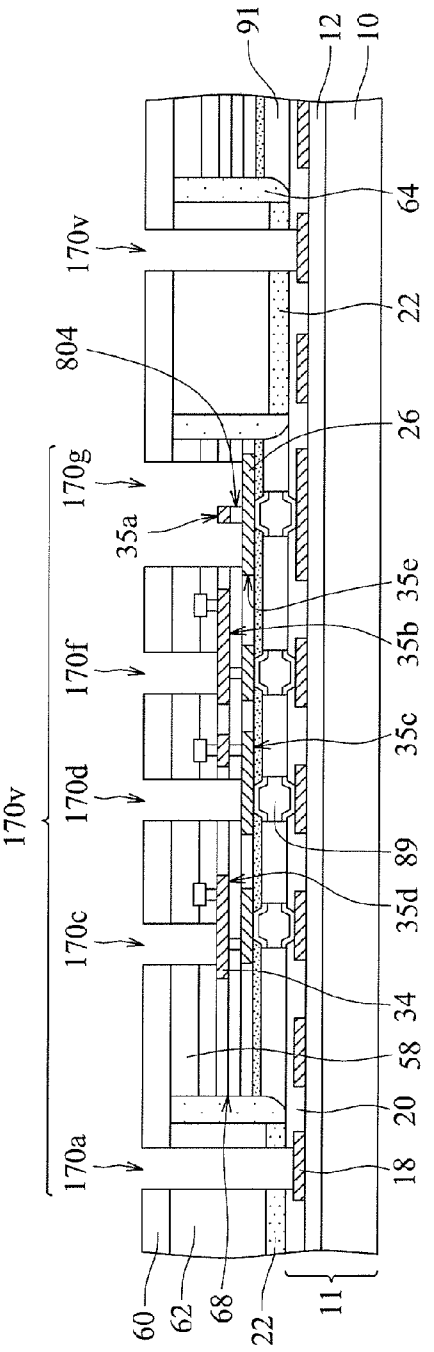


Fig. 115

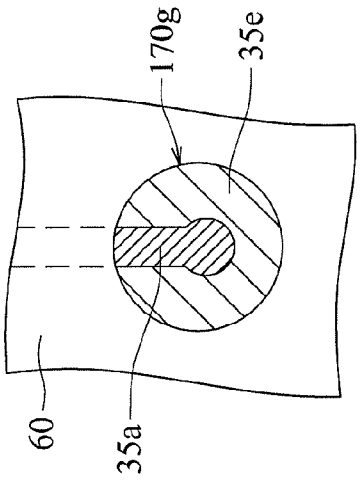


Fig. 118

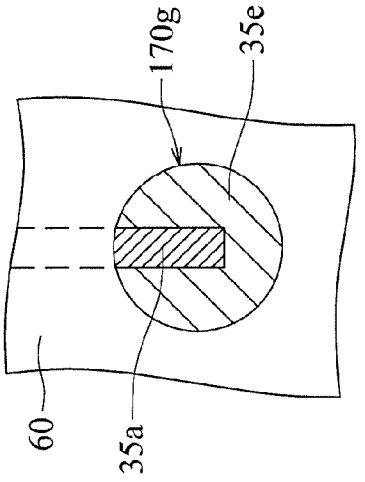


Fig. 117

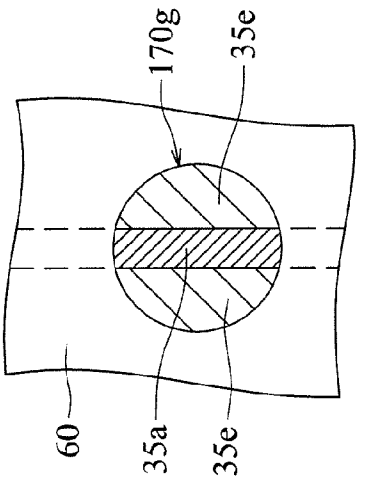


Fig. 116

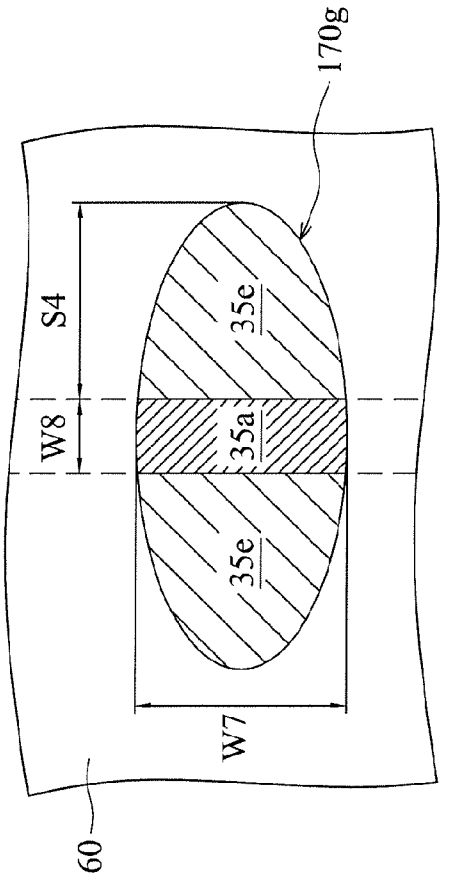


Fig. 119

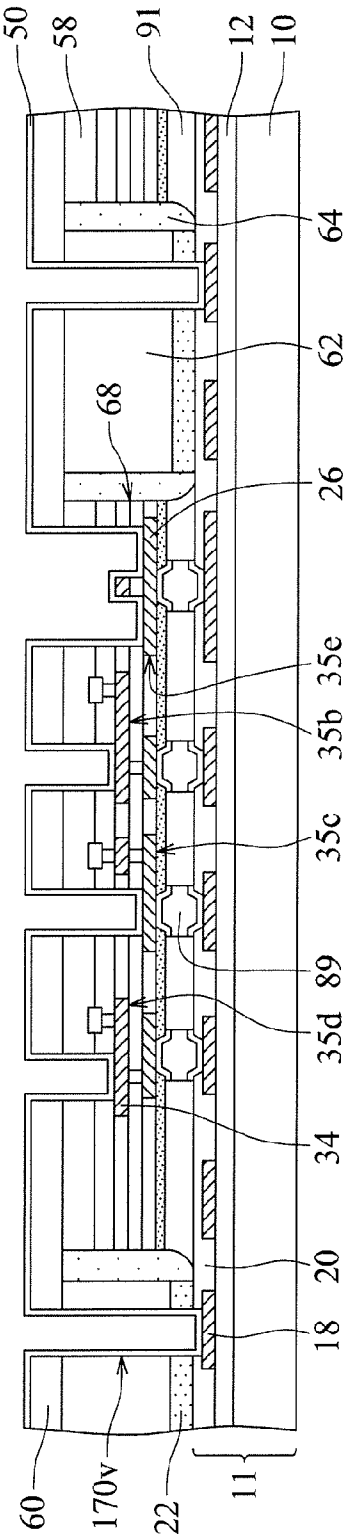


Fig. 120

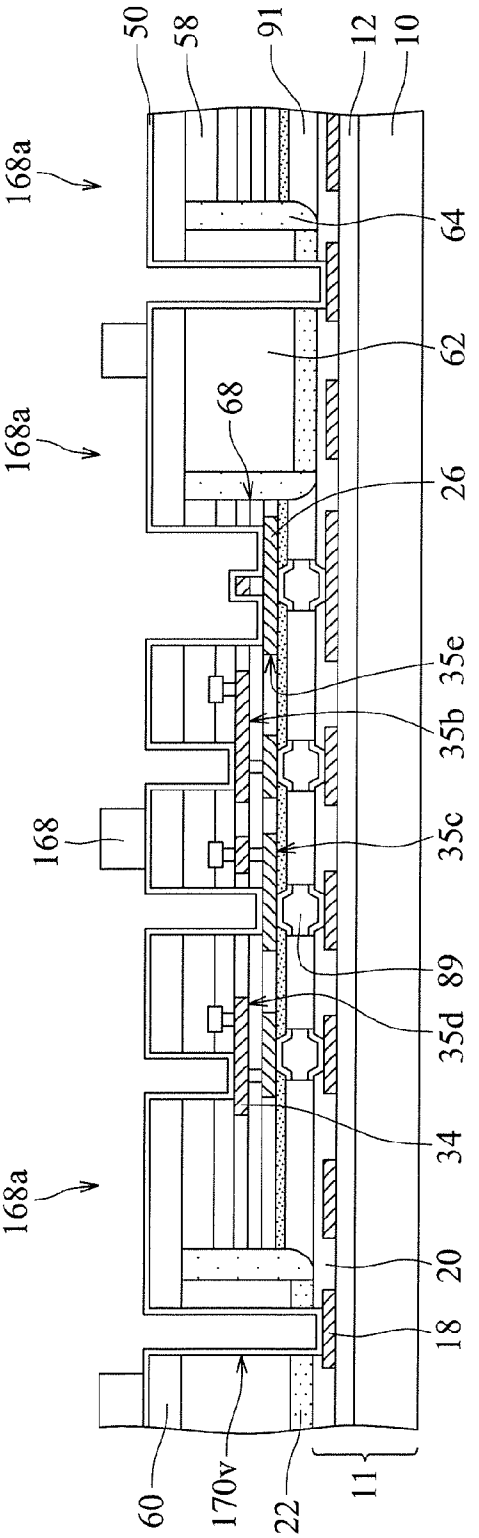


Fig. 121

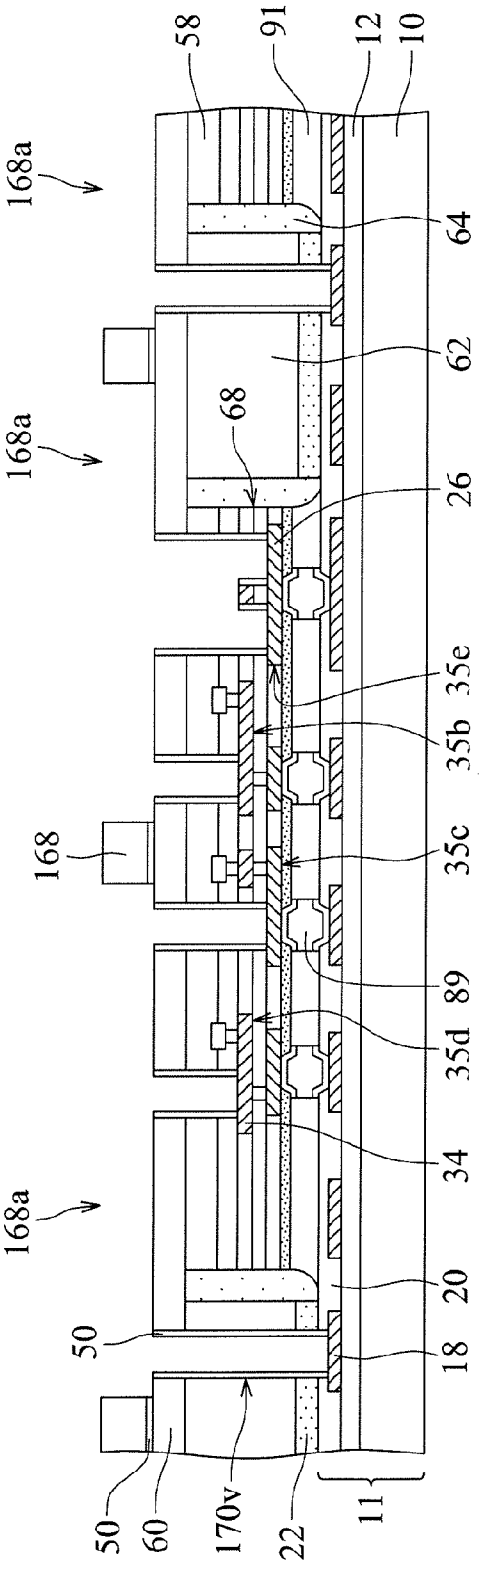


Fig. 122

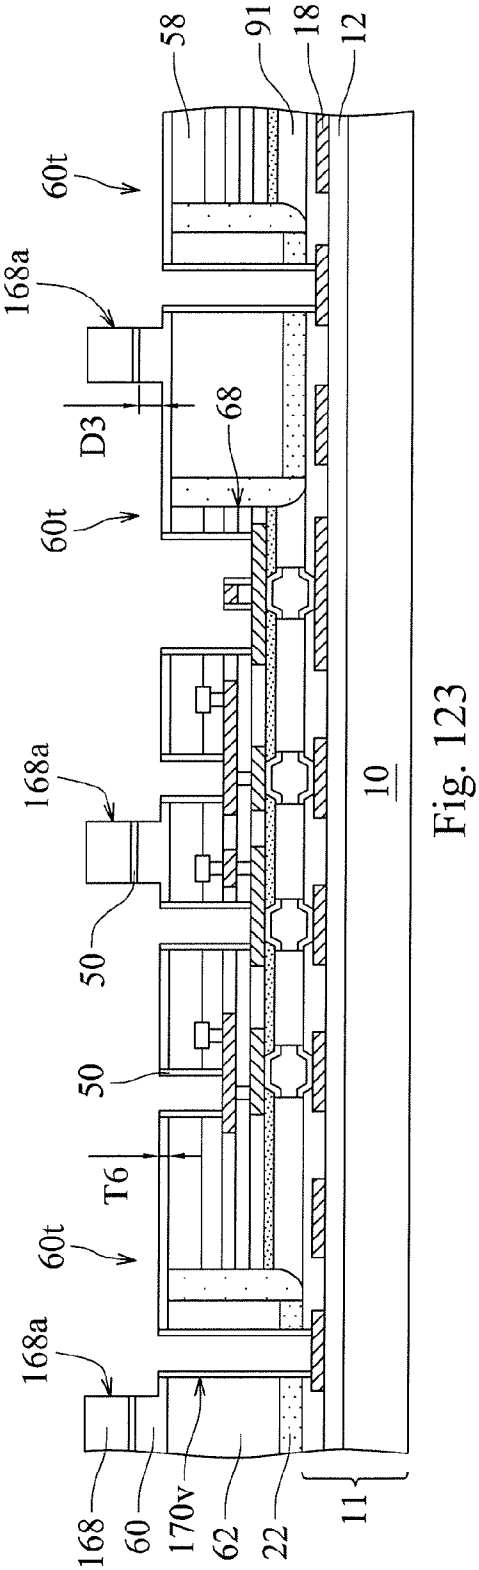


Fig. 123

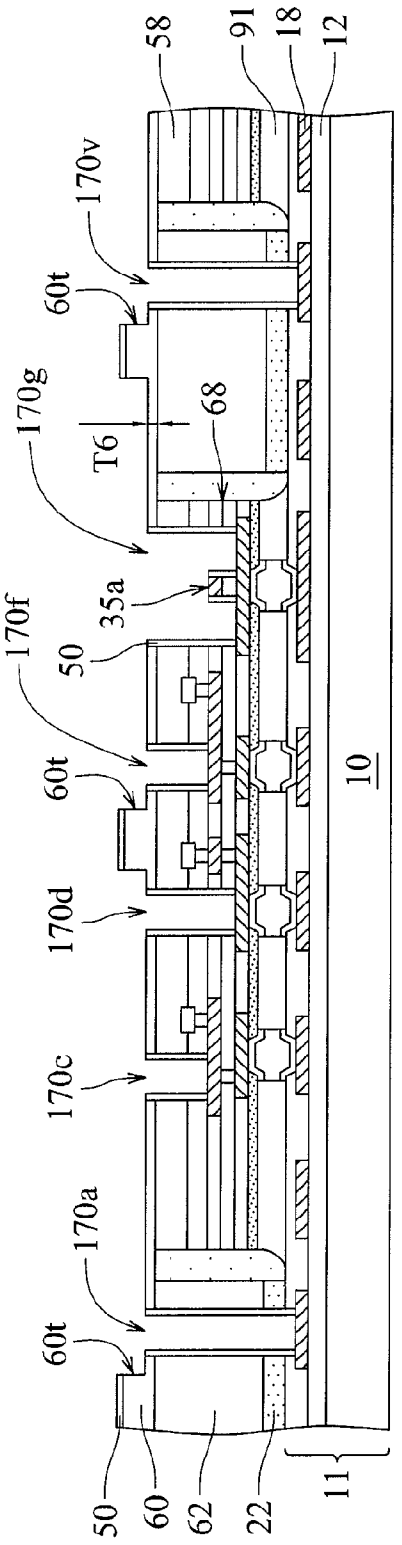


Fig. 124

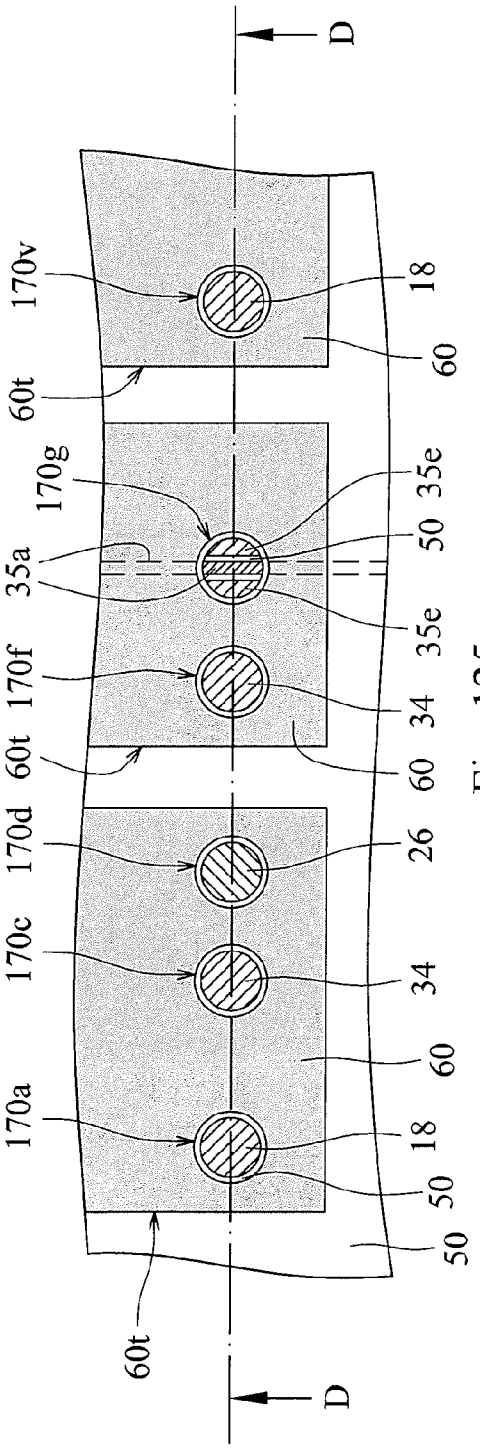


Fig. 125

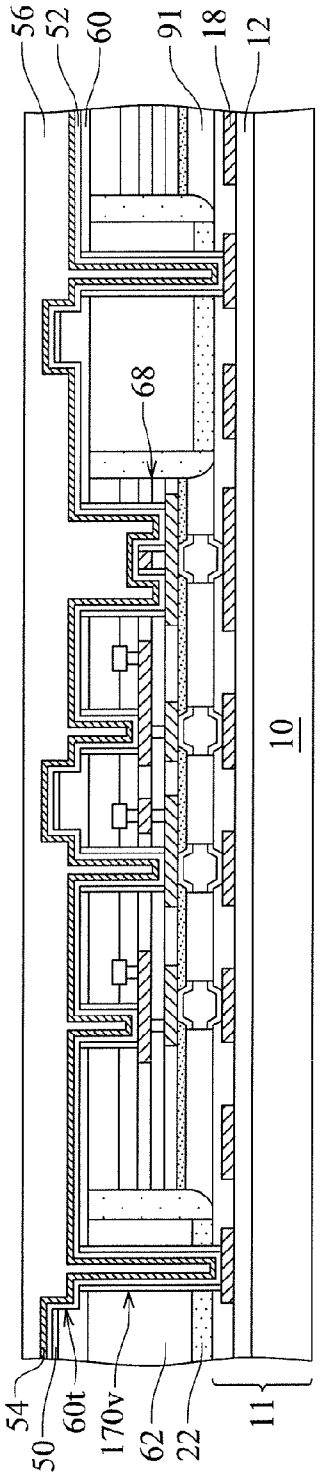


Fig. 126

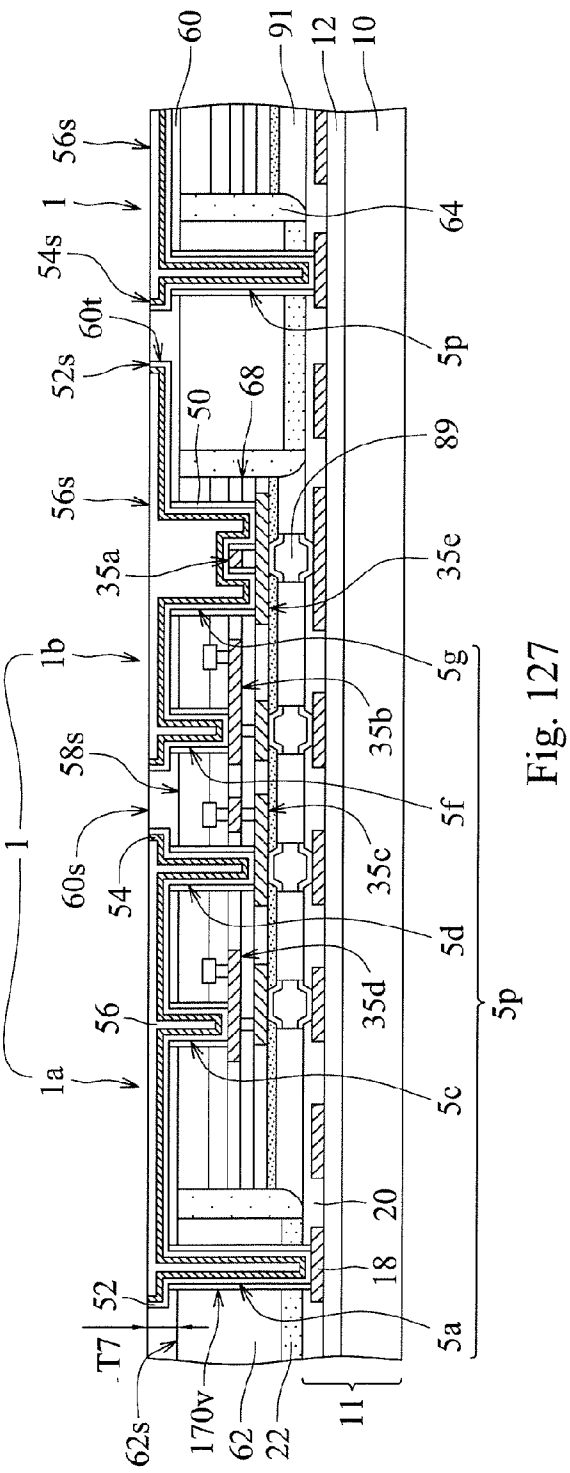


Fig. 127

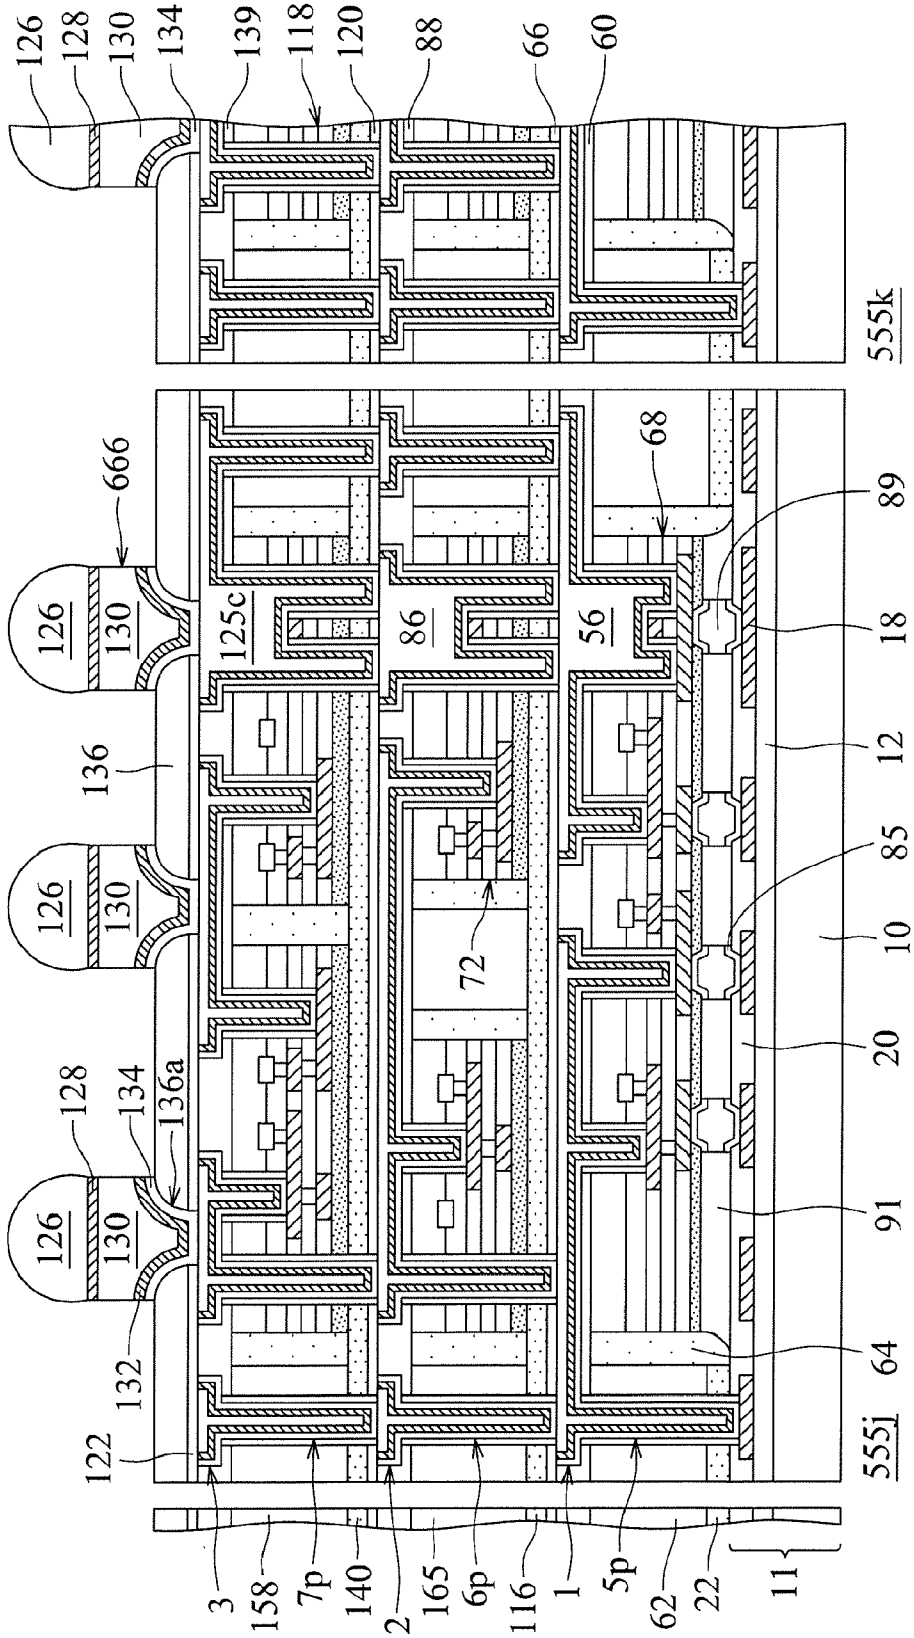

126
128
130
134
139
118
120
88
66
60
555k
666
68
89
126
130
125c
86
56
18
136
12
85
72
10
136a
20
91
64
132
555j
122
3
158
7p
140
2
165
6p
116
1
5p
62
22
11

Fig. 128

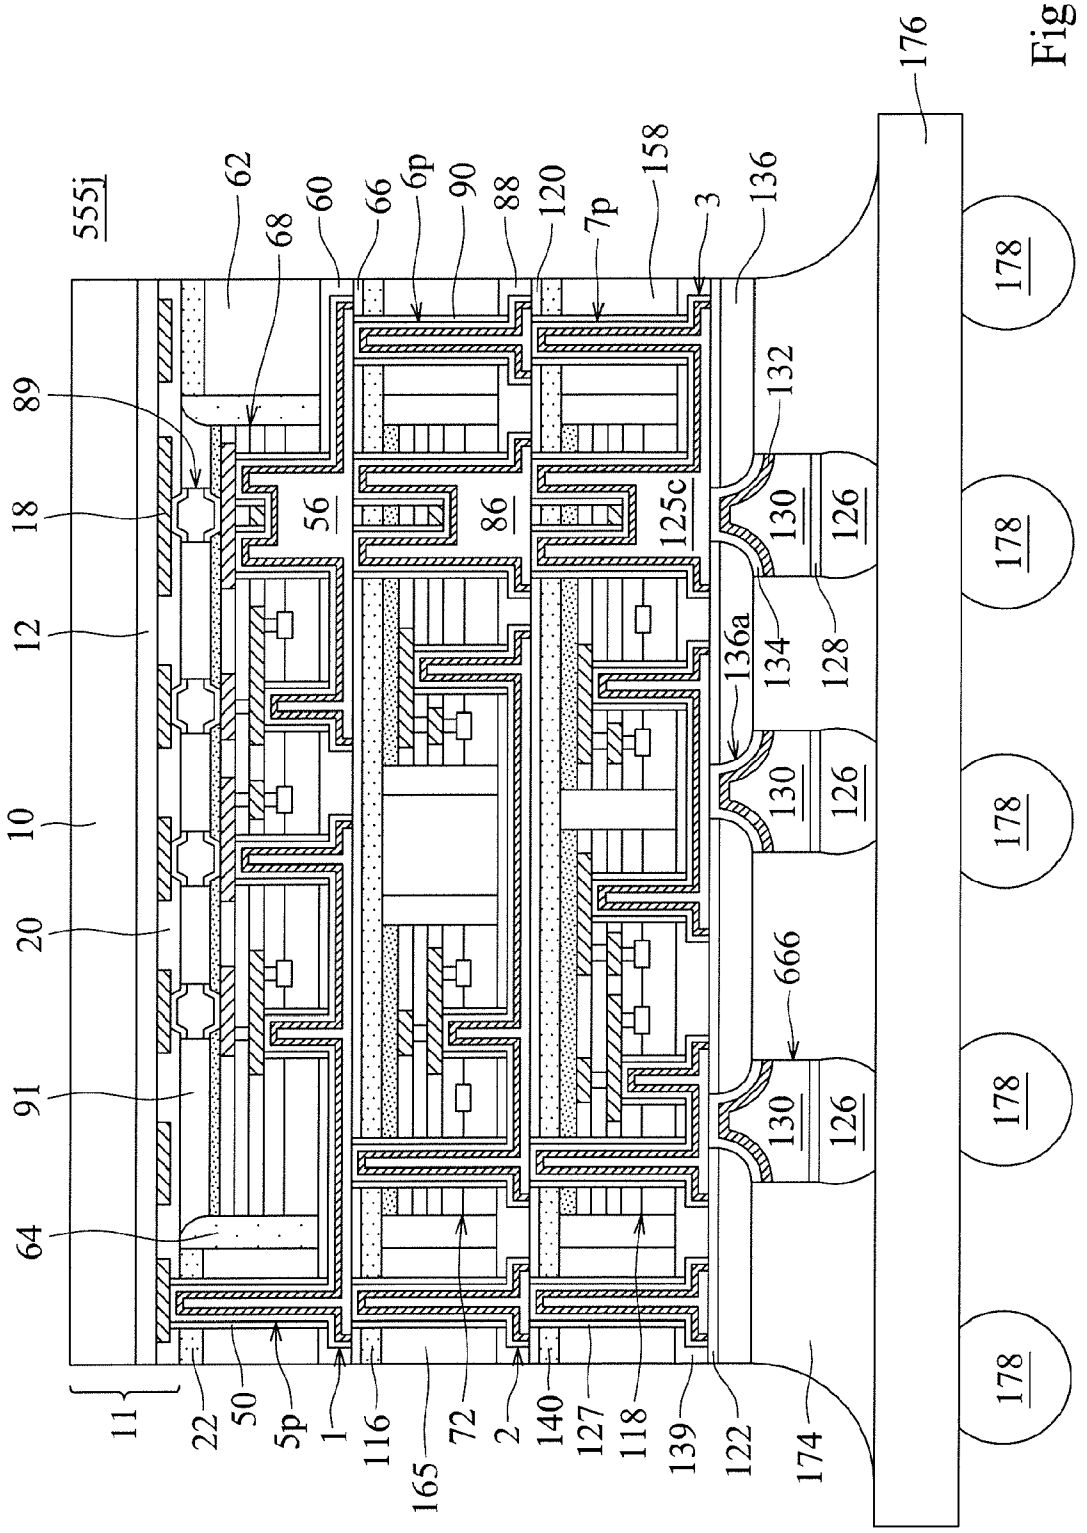

555j
62
68
60
66
6p
90
88
120
7p
158
3
136
176
89
18
12
10
20
91
64
56
86
125c
132
130
126
134
128
136a
666
178
11
22
50
5p
1
116
165
72
2
140
127
118
139
122
174

Fig. 129

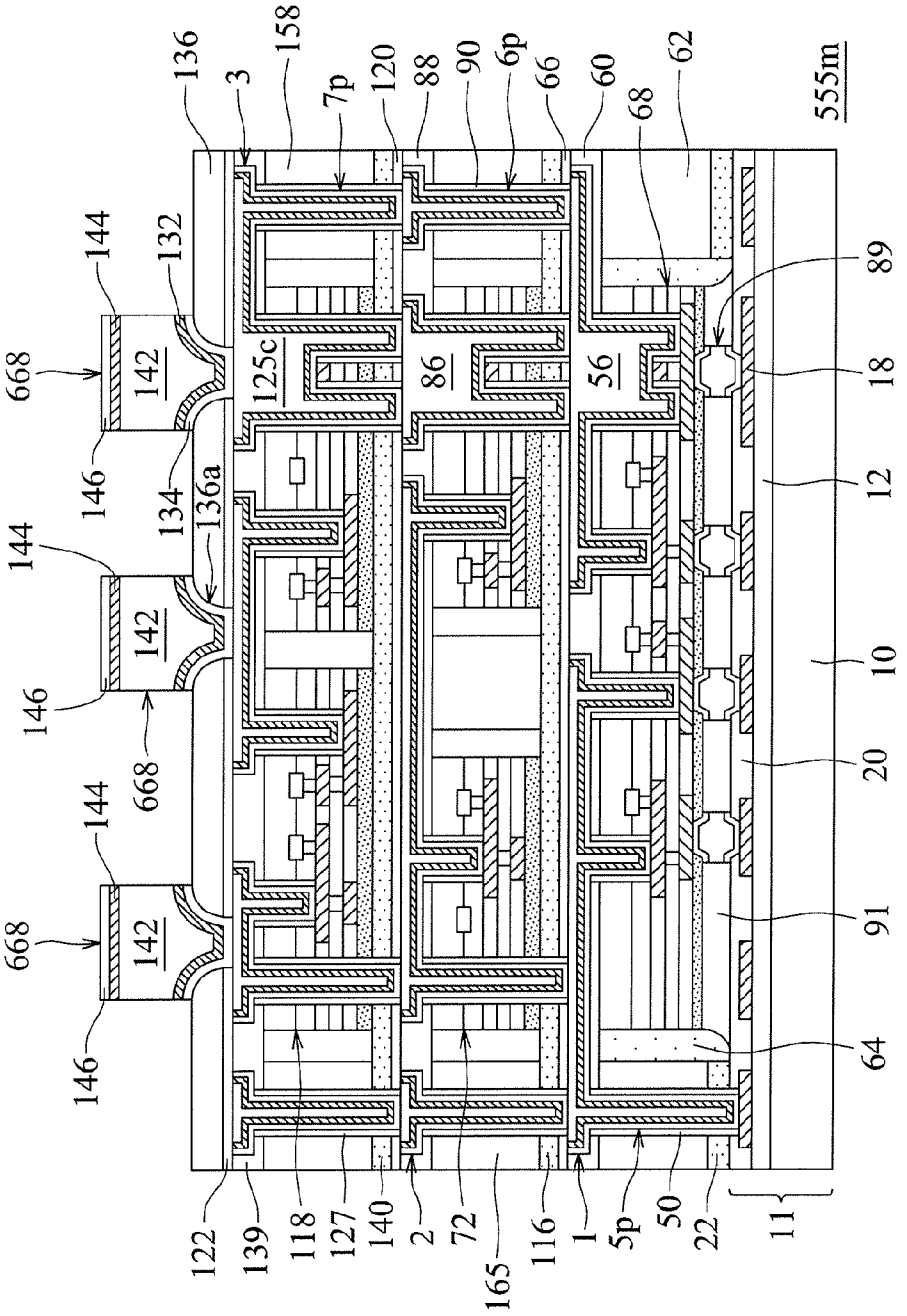

136
3
158
7p
120
88
90
6p
66
60
68
62
555m
144
132
89
668
142
125c
86
56
18
146
134
136a
12
144
142
146
668
10
20
144
668
142
91
146
64
122
139
118
127
140
2
72
165
116
1
5p
50
22
11

Fig. 130

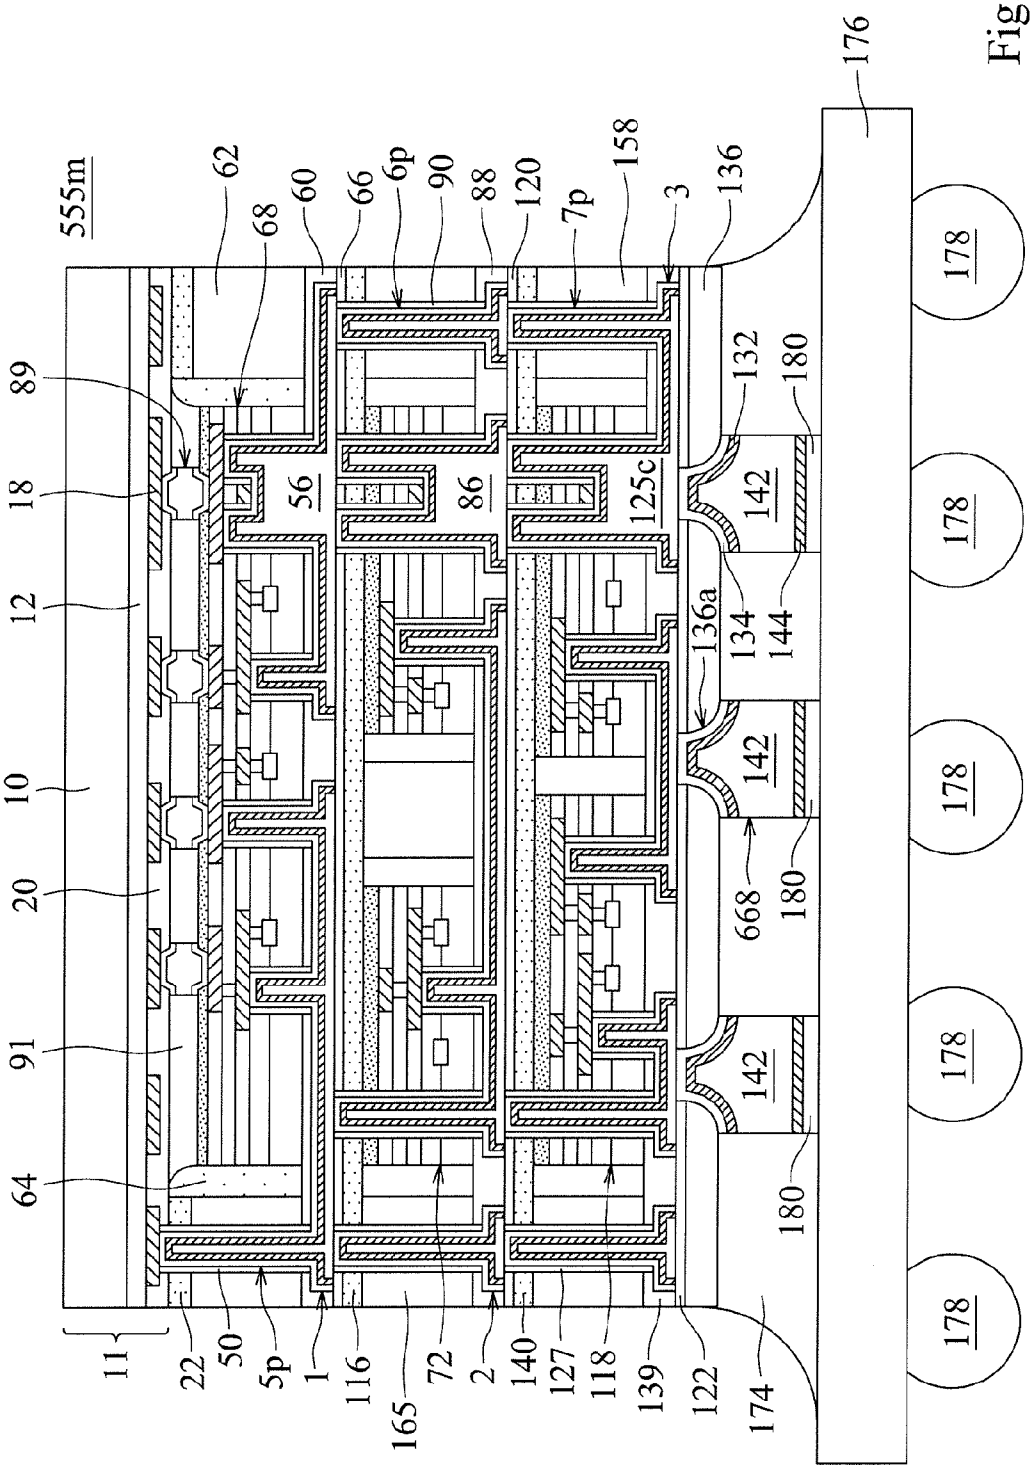

555m
62
68
60
66
6p
90
88
120
7p
158
3
136
176
89
18
12
10
20
91
64
56
86
125c
132
180
142
134
144
136a
668
178
11
22
50
5p
1
116
165
72
2
140
127
118
139
122
174

Fig. 131

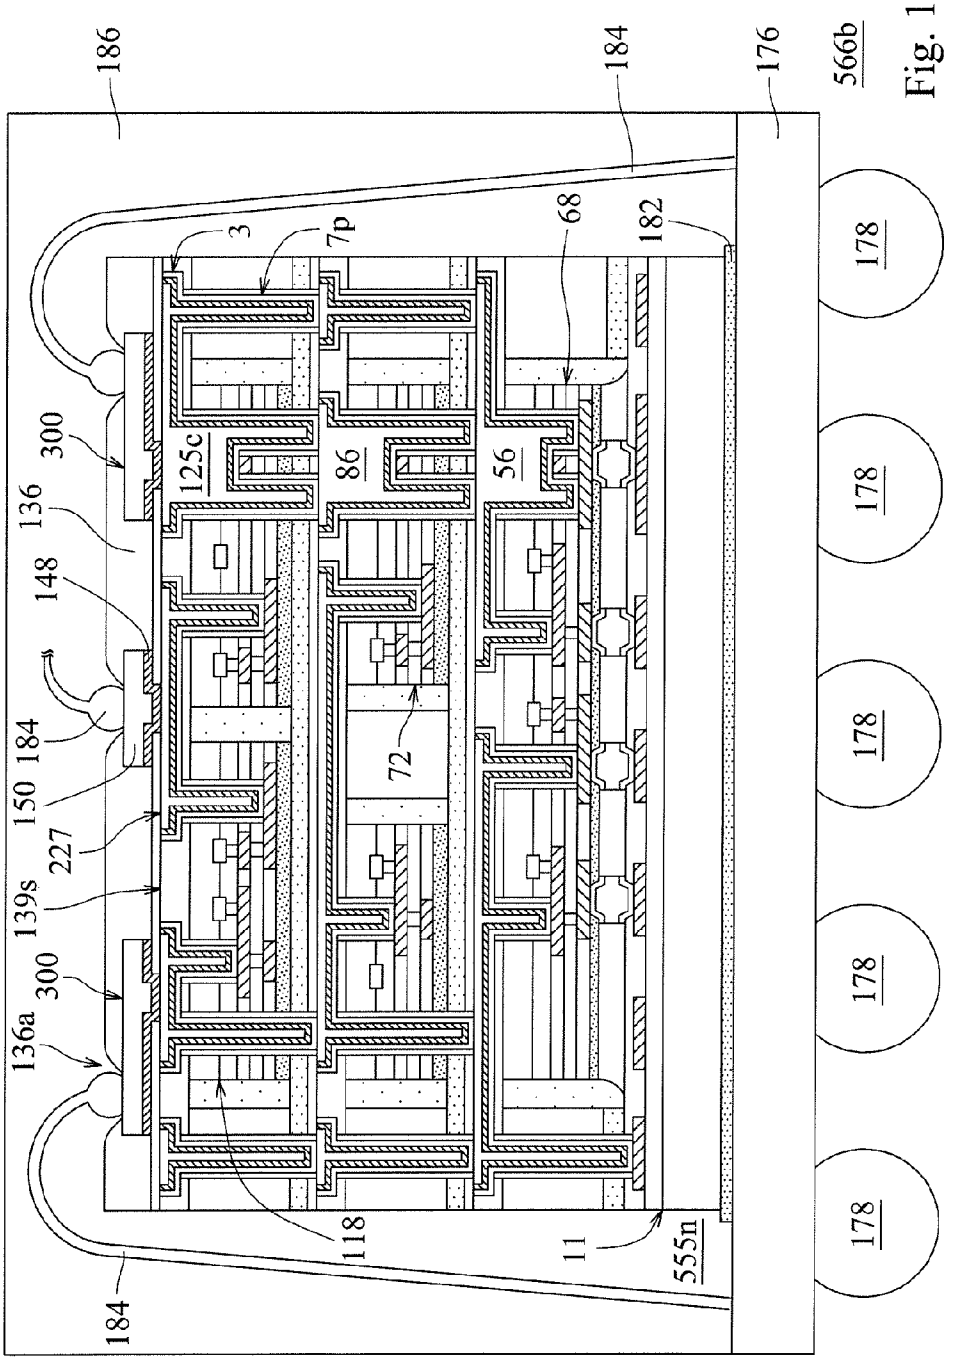

186
184
176
566b
178
178
178
178
178
3
7p
68
182
300
125c
86
56
136
148
184
72
150
227
139s
300
136a
118
11
555n
184

Fig. 132

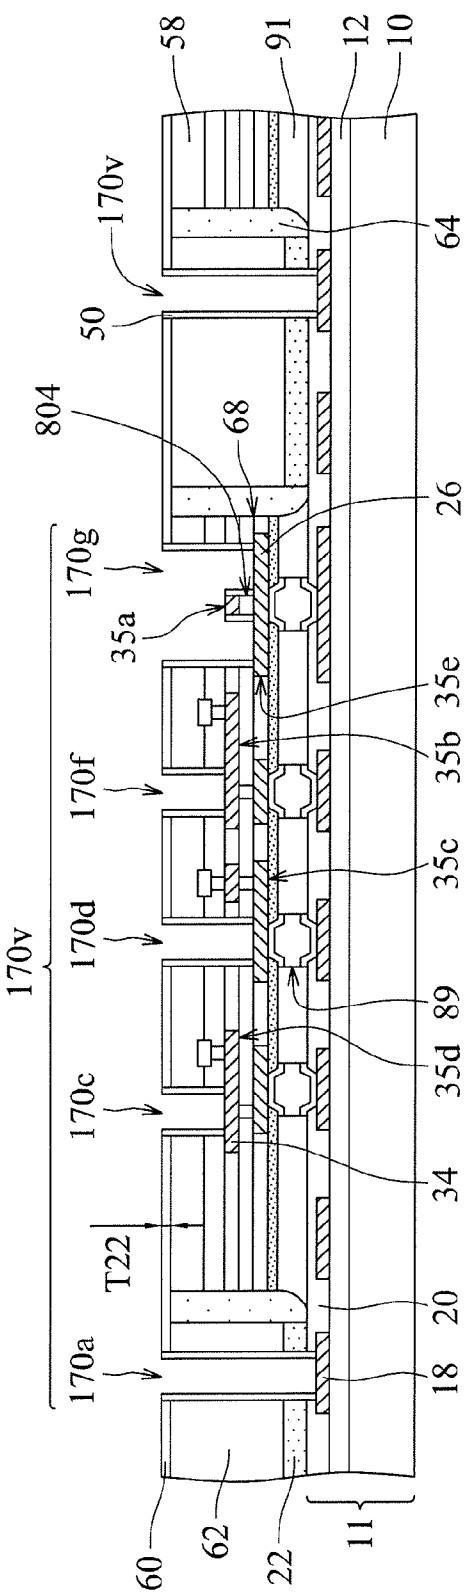


Fig. 133

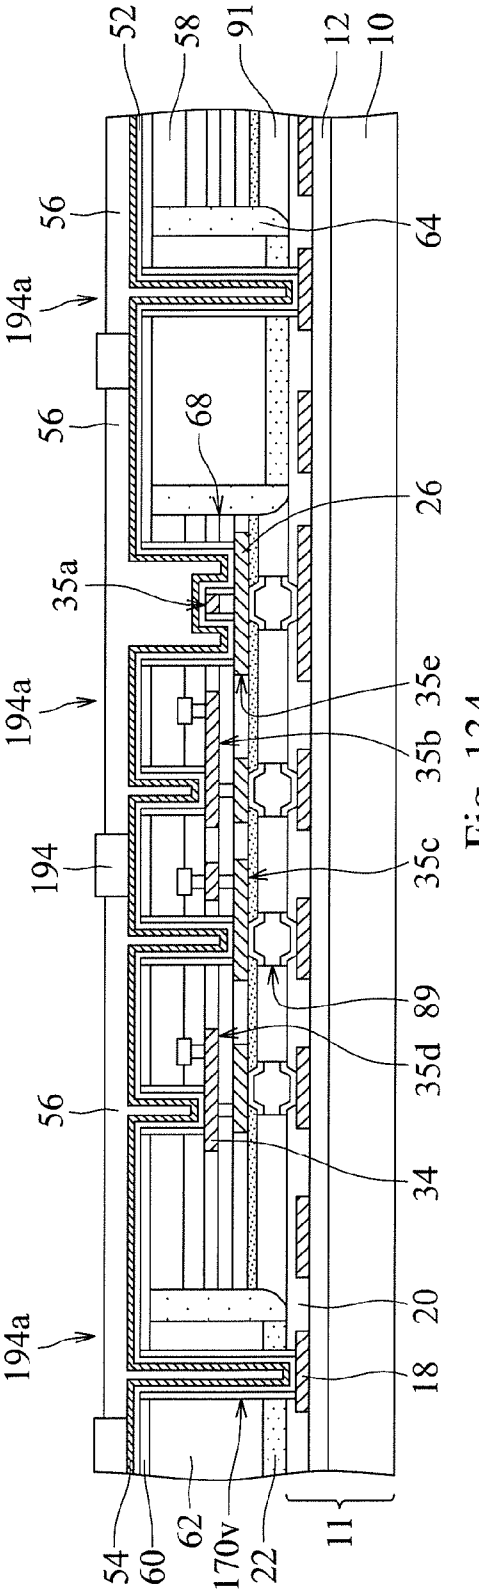


Fig. 134

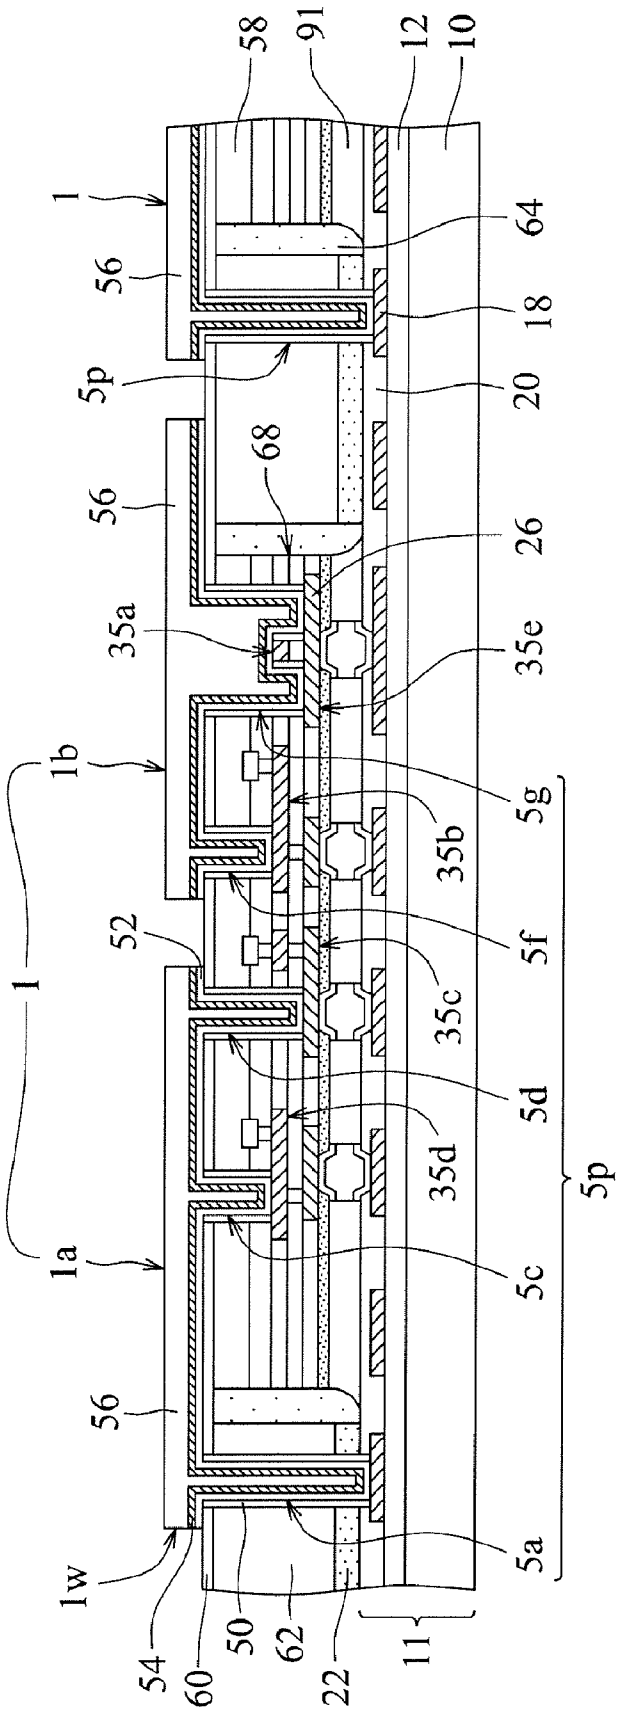

58
91
12
10
1
64
56
18
5p
20
68
56
26
35a
35e
1b
5g
35b
52
5f
1
35c
5d
35d
5p
1a
5c
56
5a
1w
54
60
50
62
22
11

Fig. 135

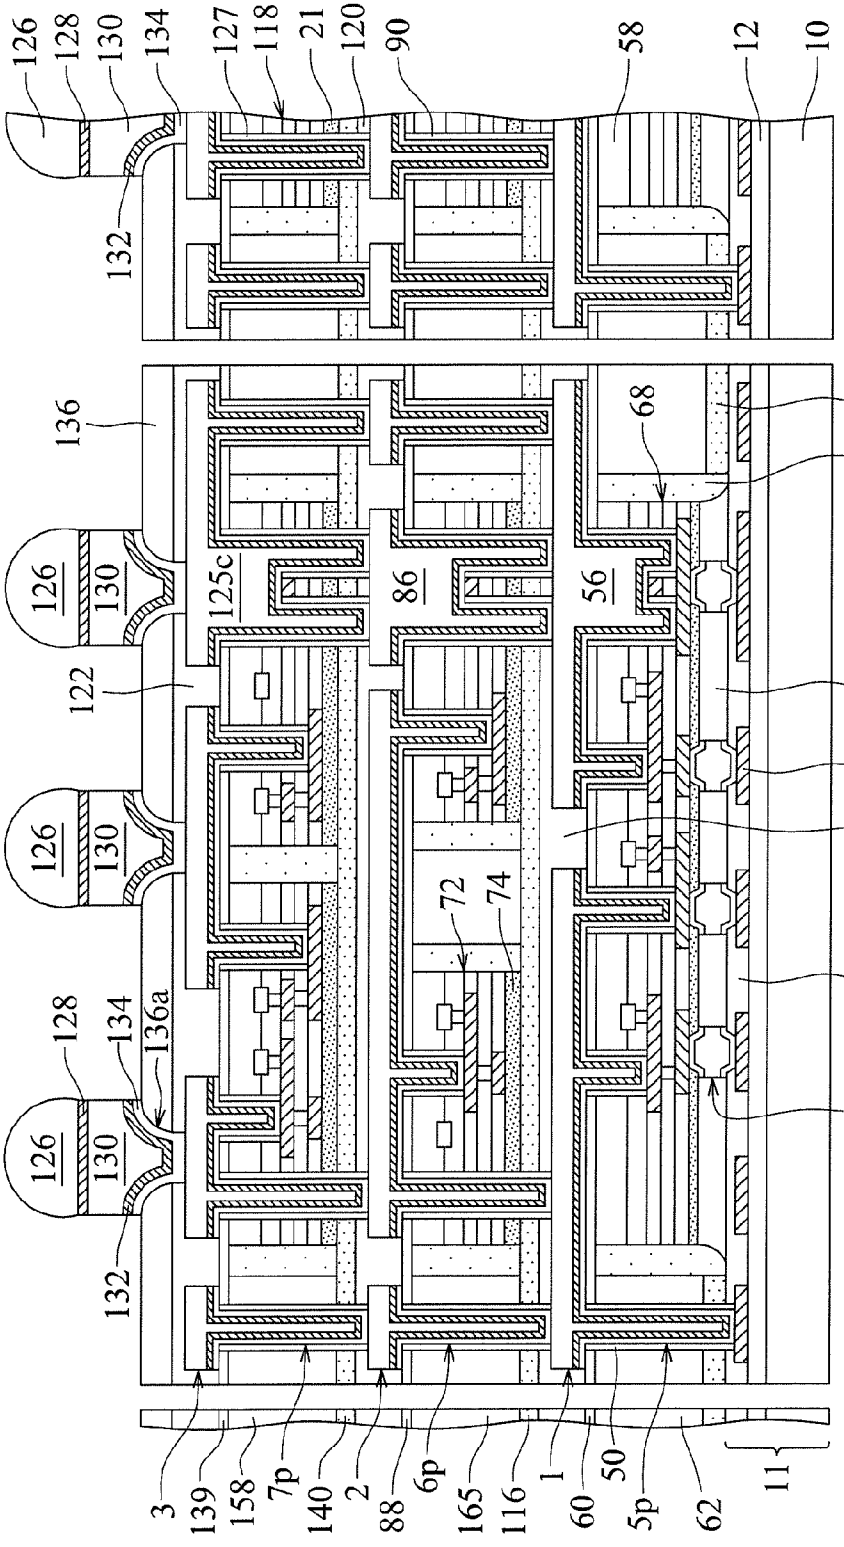

126
128
130
134
127
118
21
120
90
58
12
10
132
555p
136
68
22
64
126
130
125c
86
56
122
91
18
66
72
74
20
136a
89
555o
3
139
158
7p
140
2
88
6p
165
116
1
60
50
5p
62
11

Fig. 136

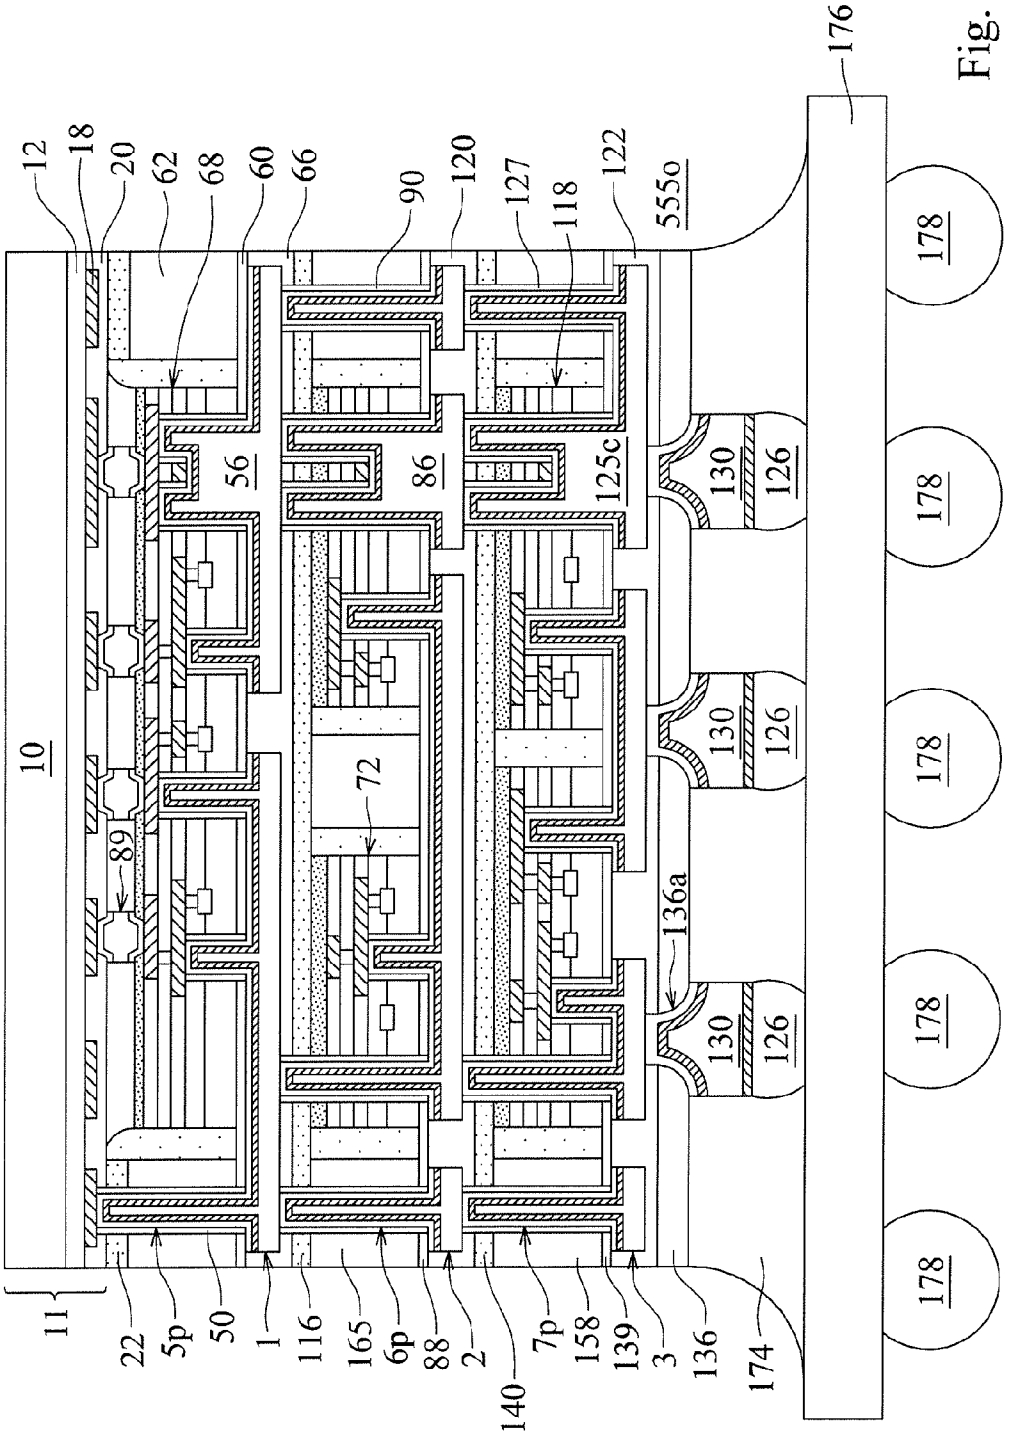
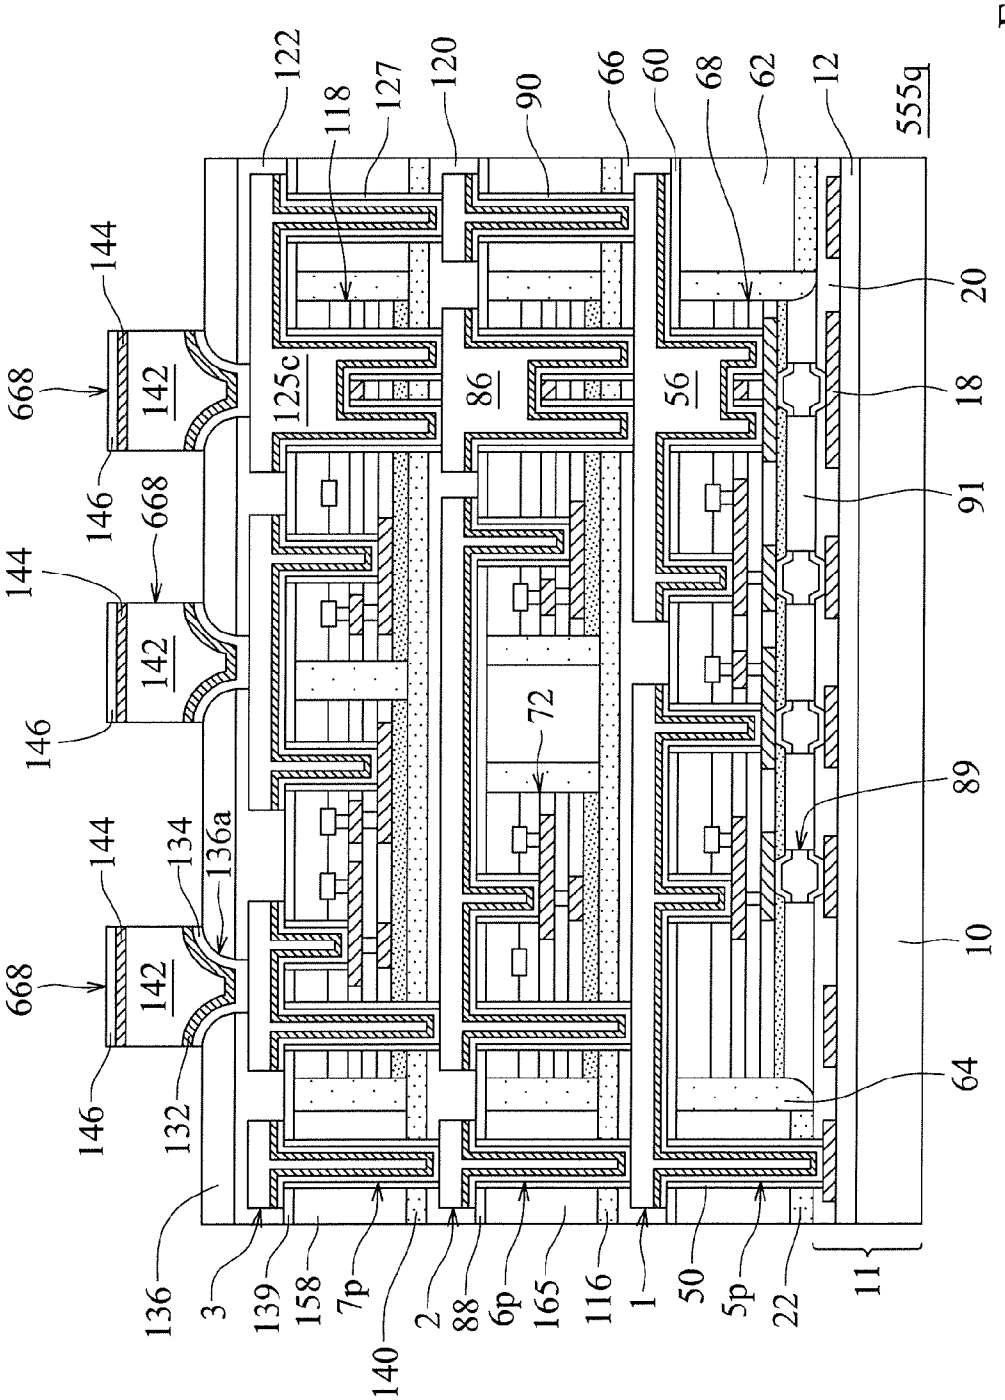

12
18
20
62
68
60
66
90
120
127
118
122
555o
176
178
178
178
178
178
56
86
125c
130
126
130
126
130
126
72
89
136a
10
11
22
5p
50
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 137

Fig. 138


122
118
127
120
90
66
60
68
62
12
555q
144
668
142
125c
86
56
20
18
146
91
72
89
134
136a
10
64
132
136
3
139
158
7p
140
2
88
6p
165
116
1
50
5p
22
11

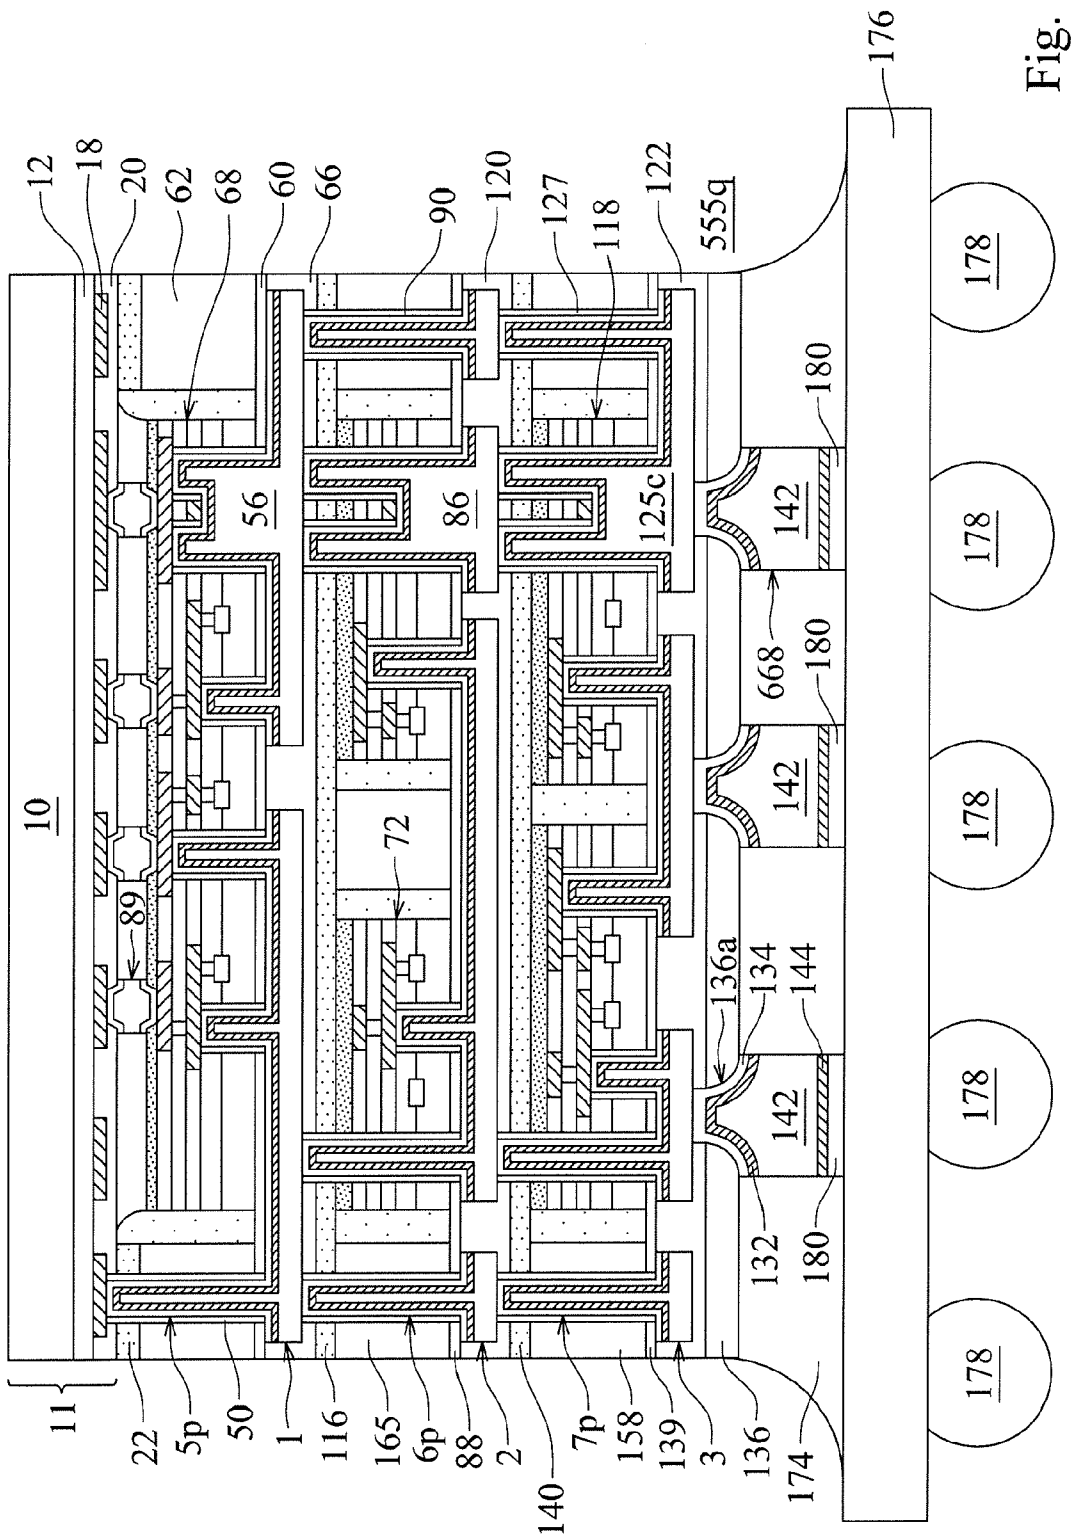

12
18
20
62
68
60
66
90
120
127
118
122
555q
176
178
180
142
56
86
125c
668
72
89
136a
134
144
132
10
11
22
5p
50
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 139

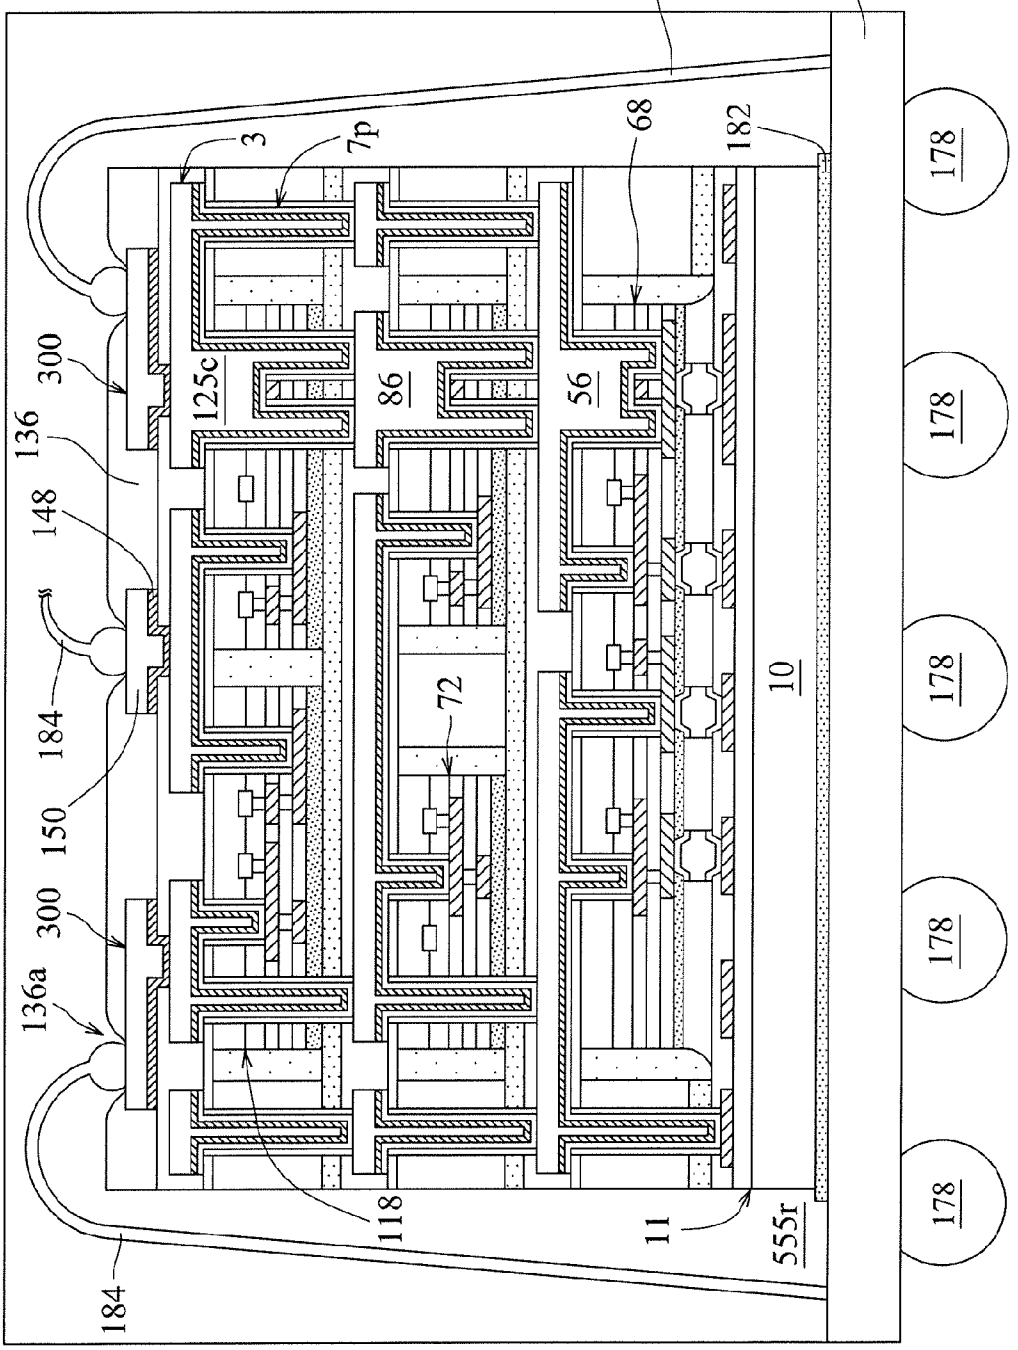

184
176
566c
3
7p
68
182
178
300
125c
86
56
136
148
184
150
72
10
300
136a
118
11
555r
184

Fig. 140

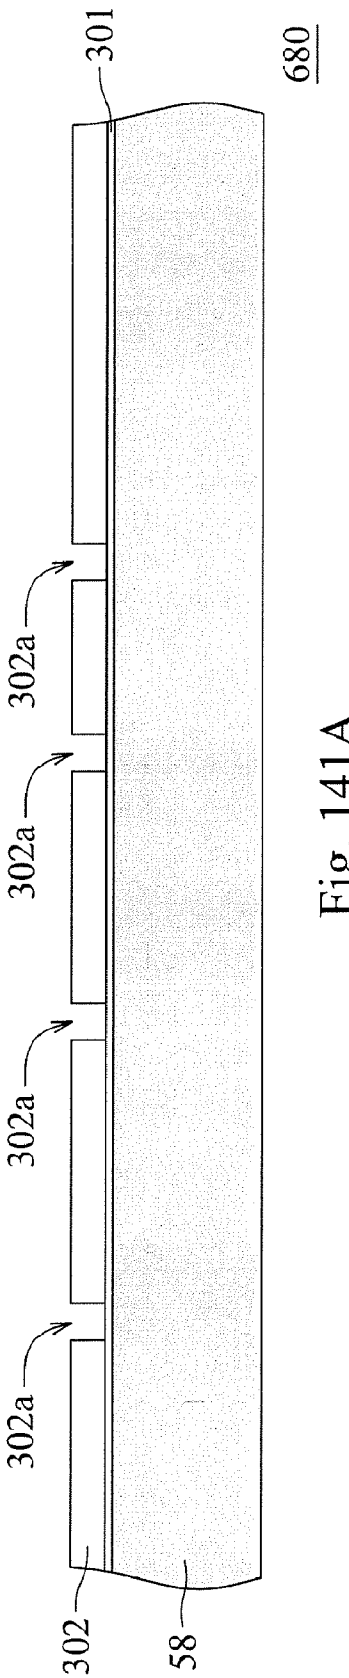


Fig. 141A

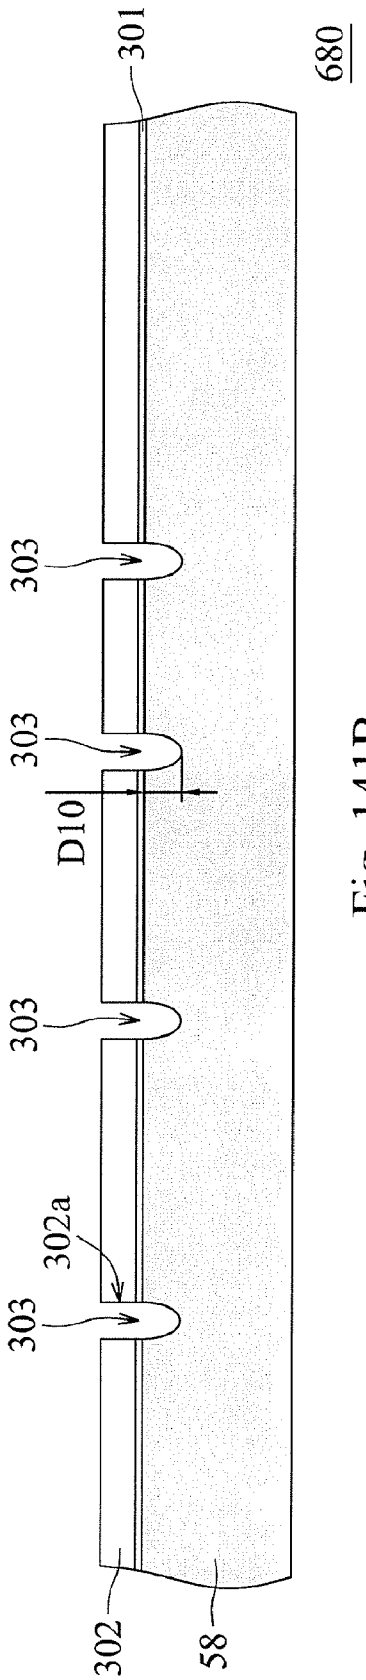


Fig. 141B

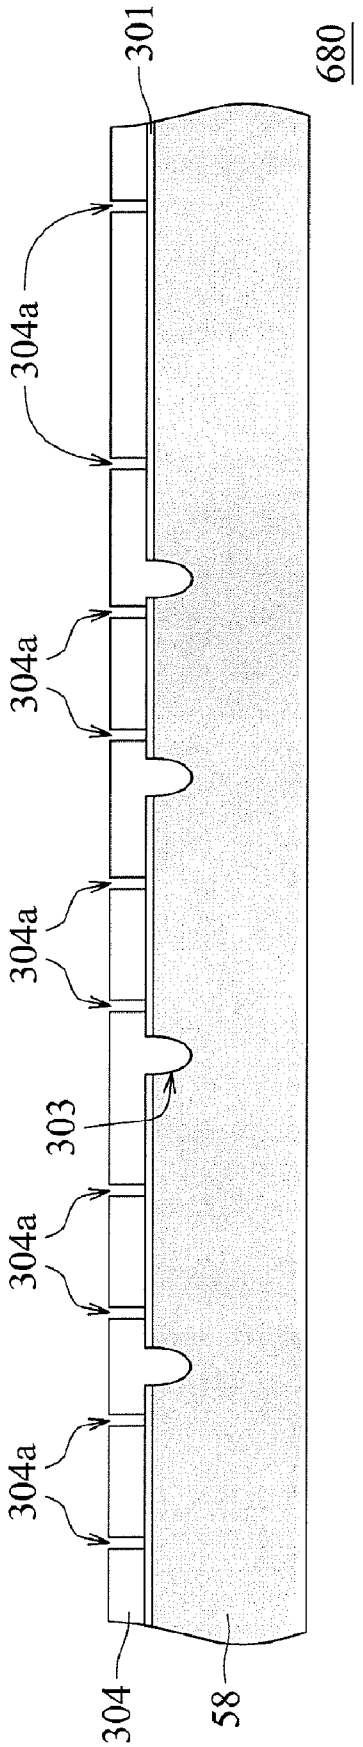


Fig. 141C

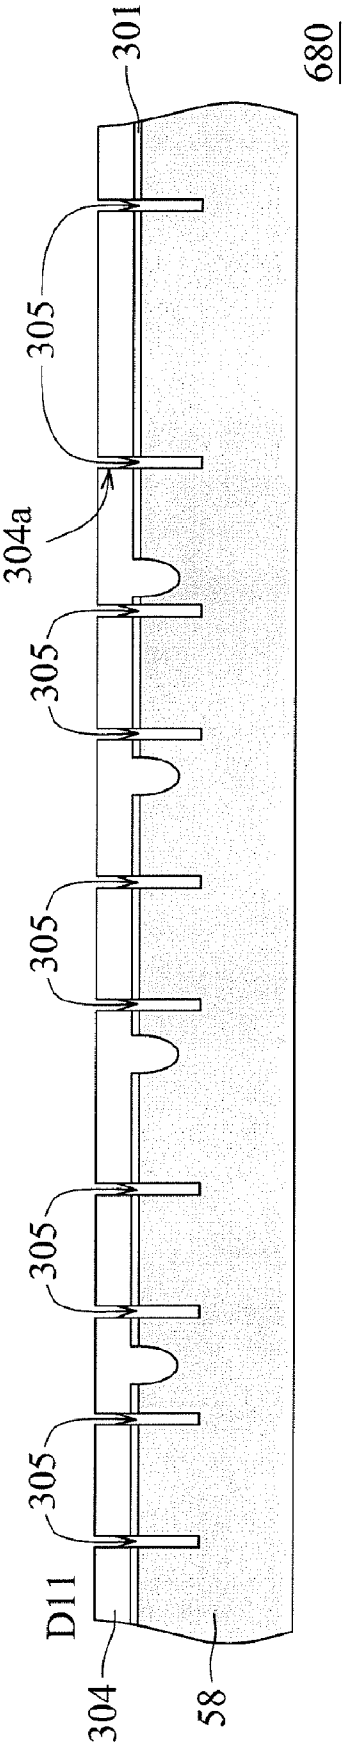


Fig. 141D

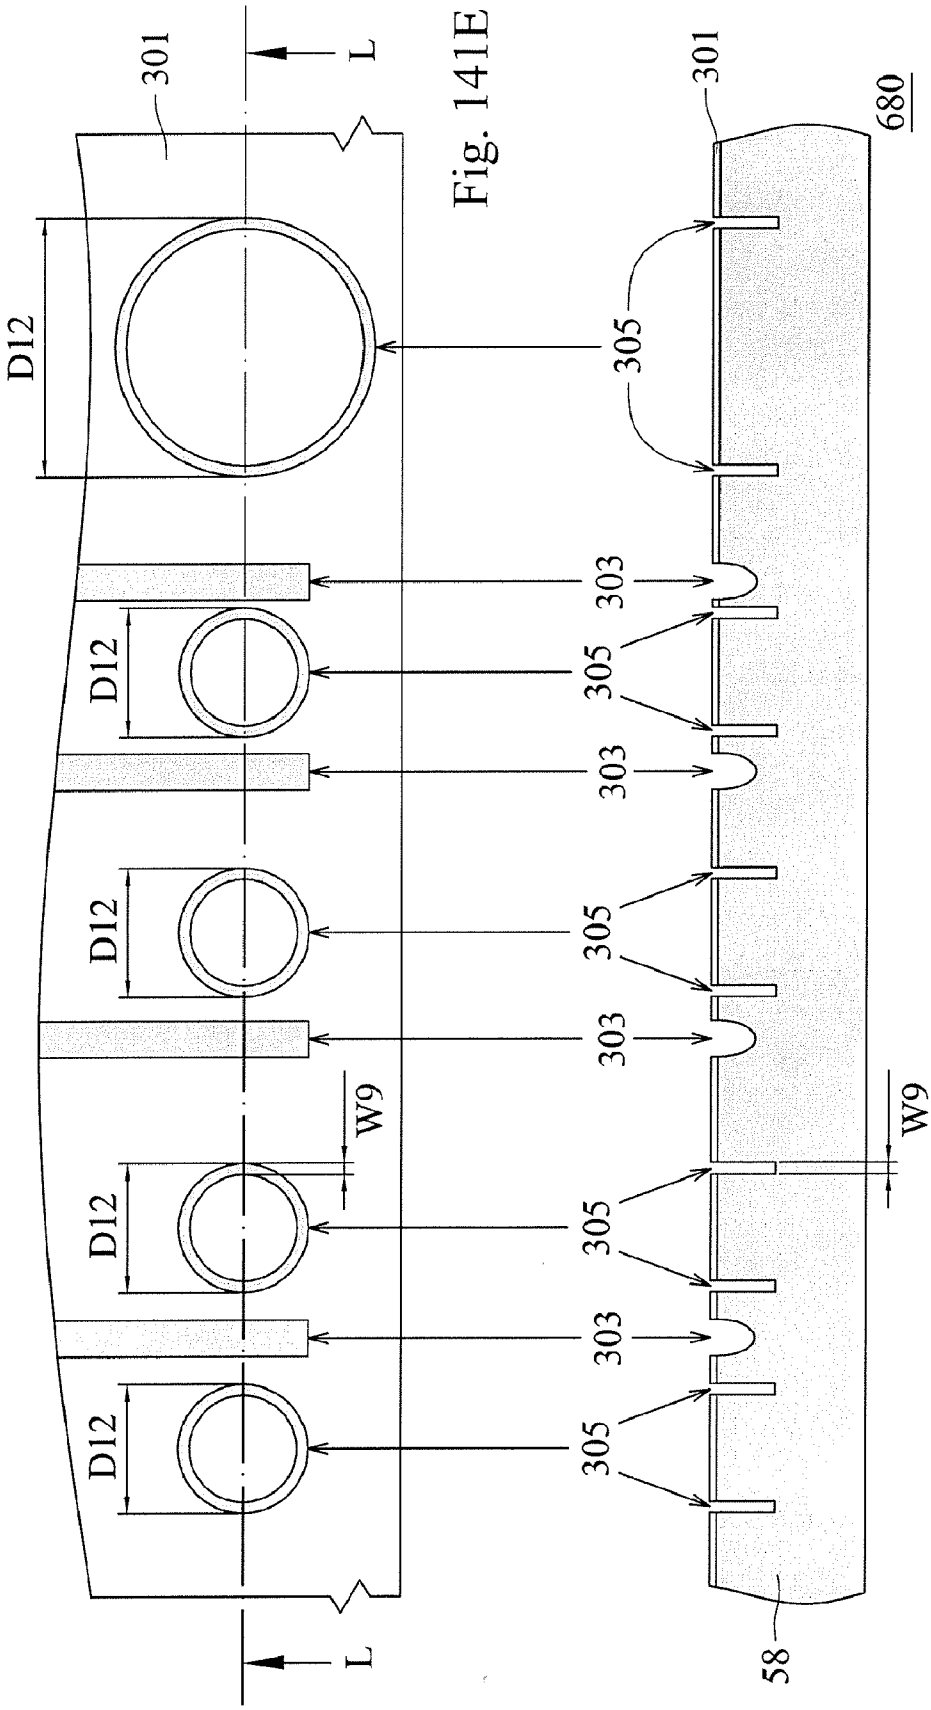


Fig. 141E

Fig. 141F

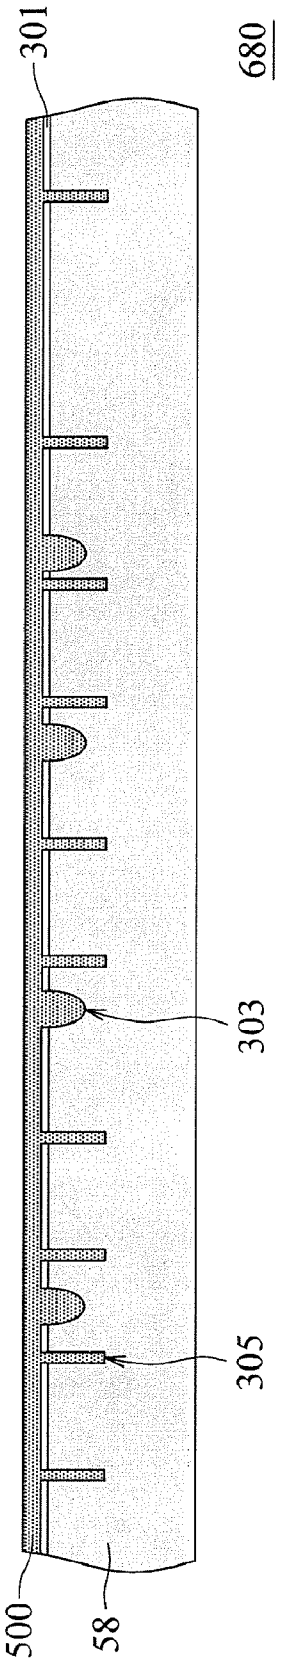


Fig. 141G

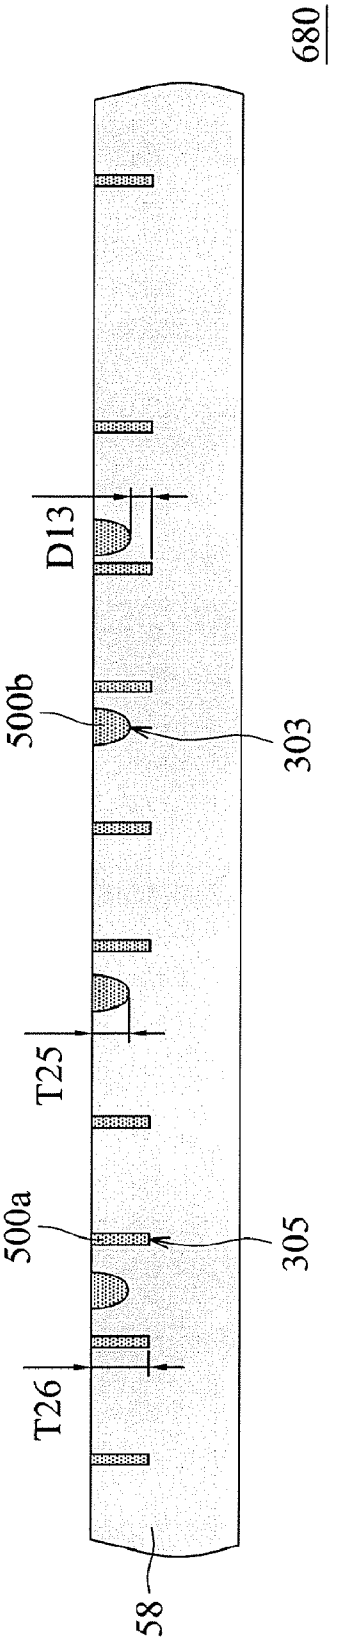


Fig. 141H

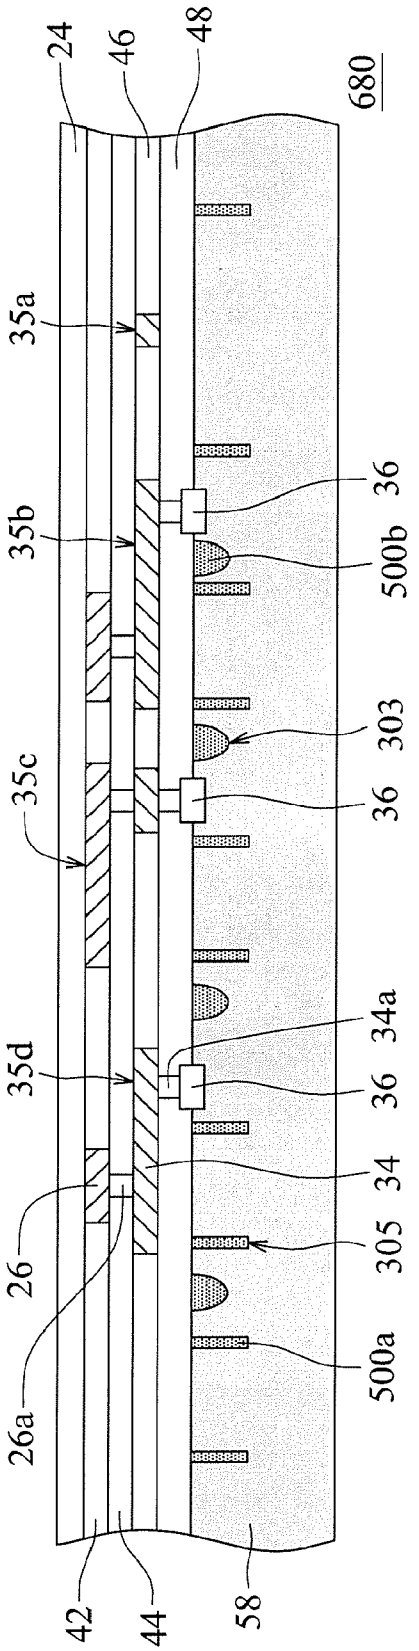


Fig. 141I

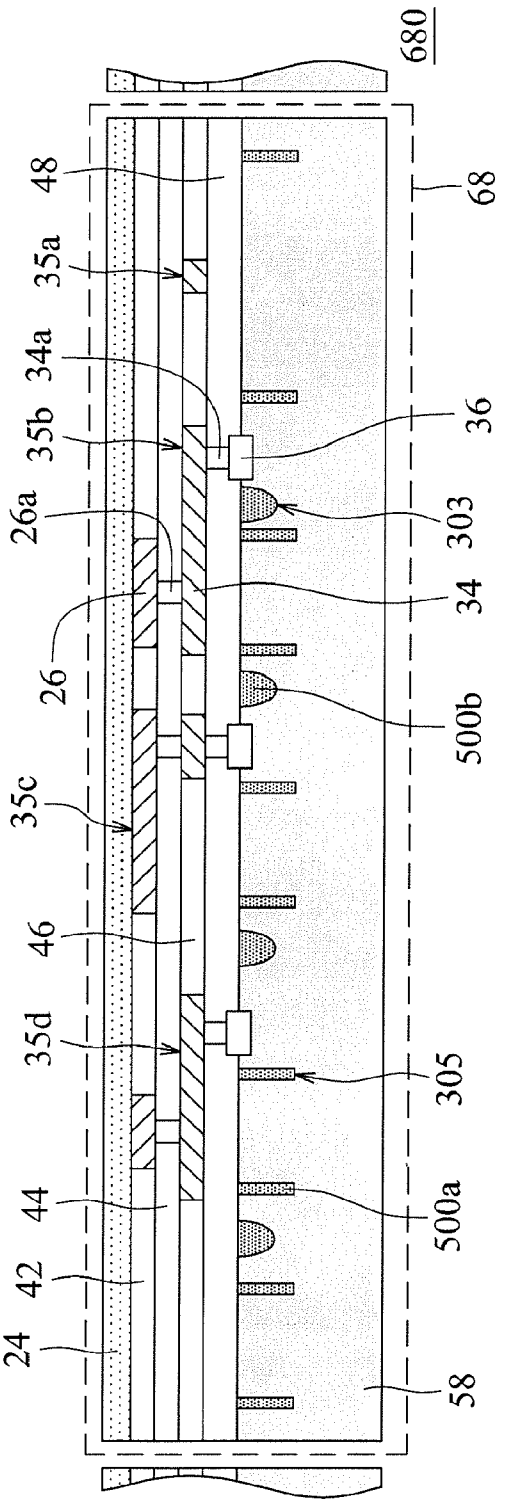


Fig. 141J

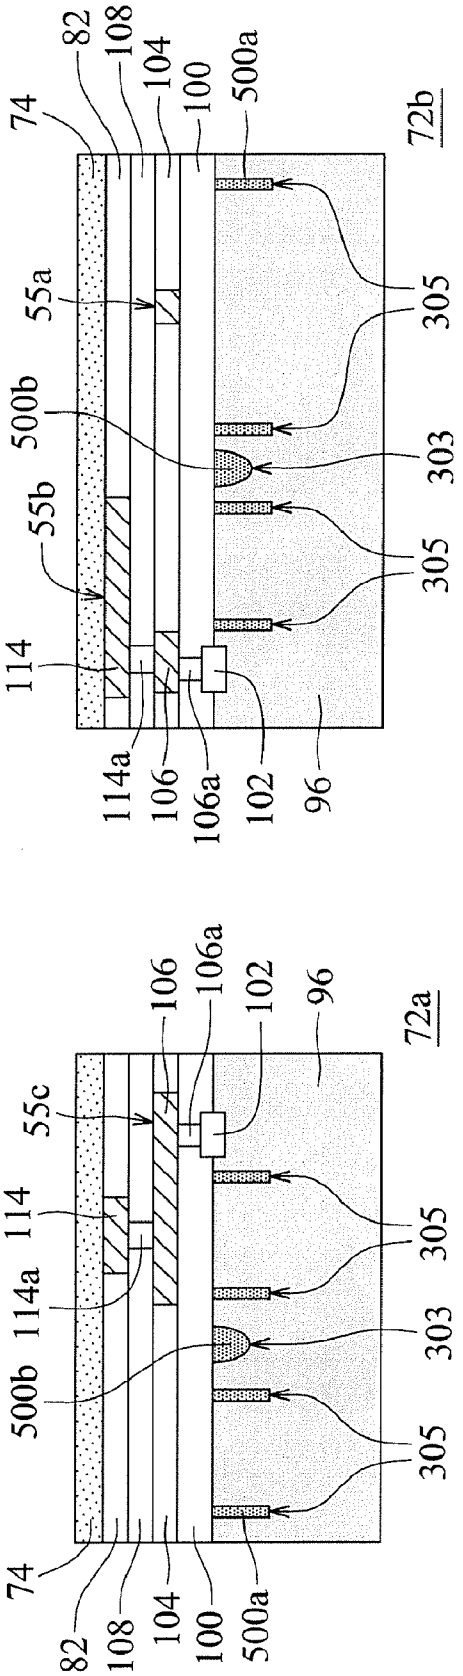

72b
72a
74
82
108
104
100
500a
55a
500b
55b
114
114a
106
106a
102
96
305
303
55c

Fig. 141K

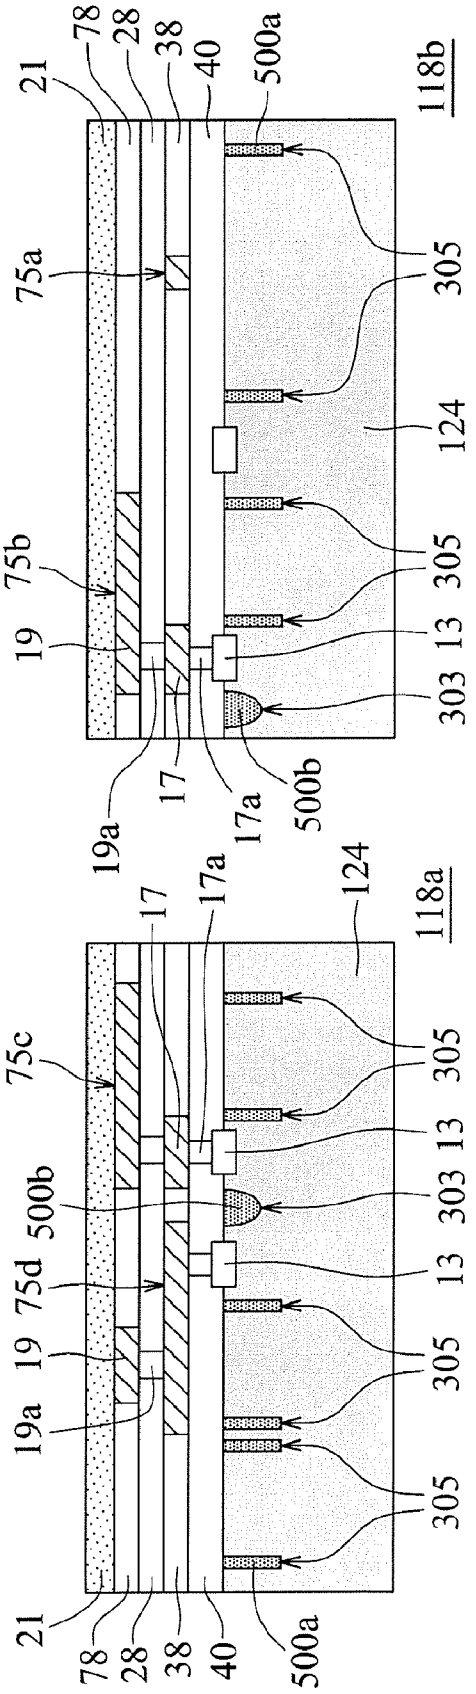

21
78
28
38
40
500a
118b
75a
305
124
75b
305
19
13
303
19a
17
17a
500b
124
17
17a
118a
75c
305
13
500b
303
75d
13
19
305
19a
305
305
21
78
28
38
40
500a

Fig. 141L

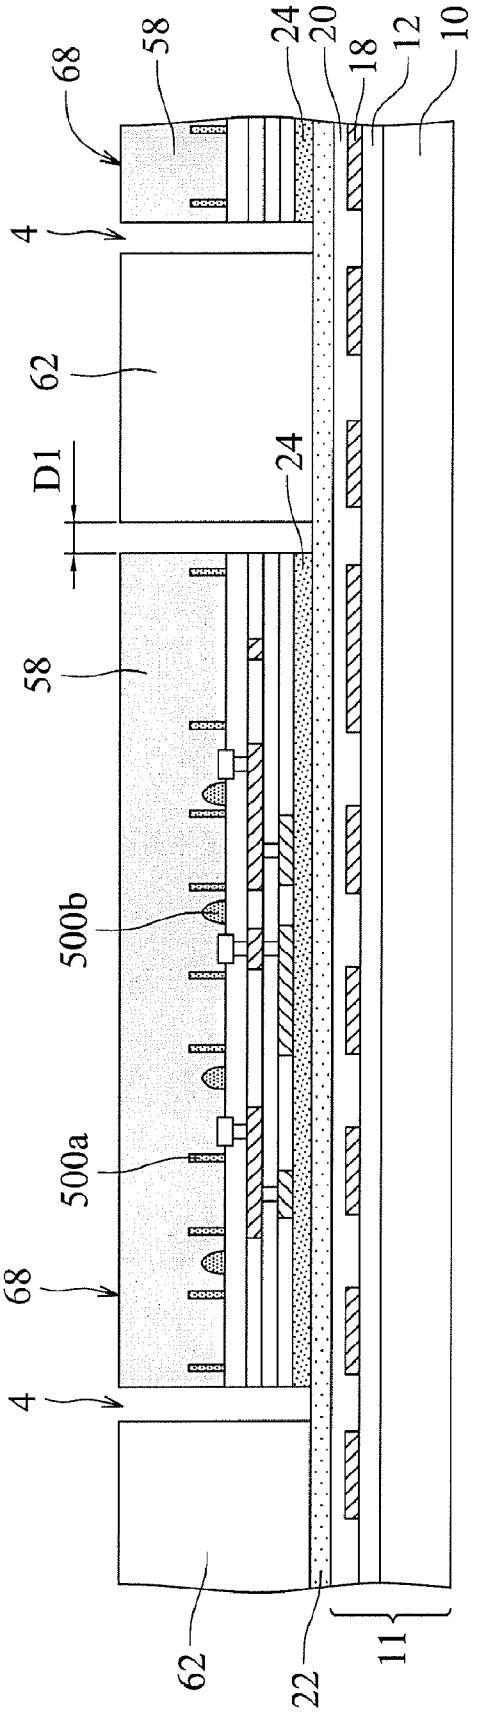


Fig. 142

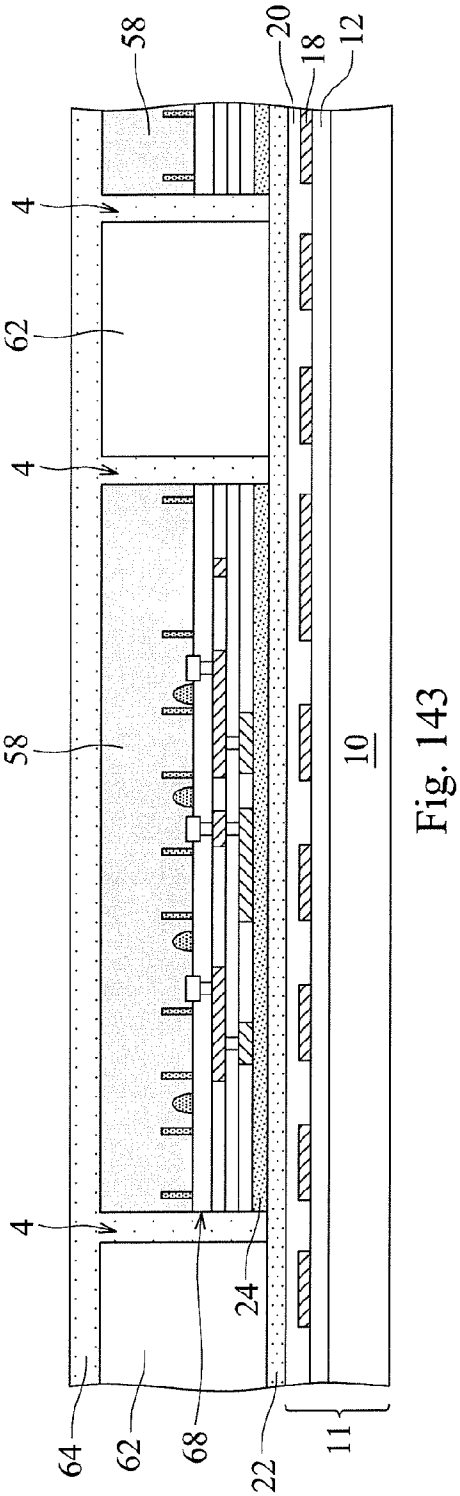


Fig. 143

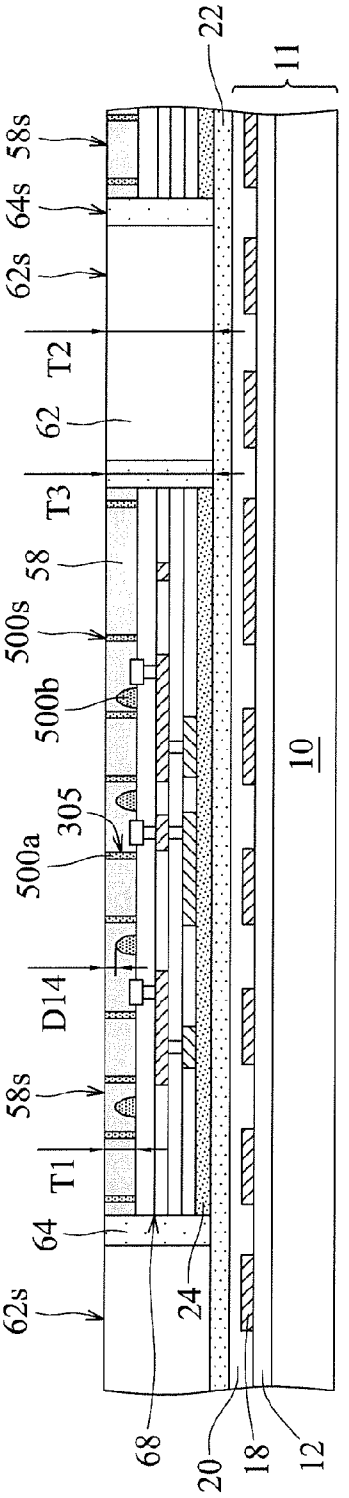


Fig. 144

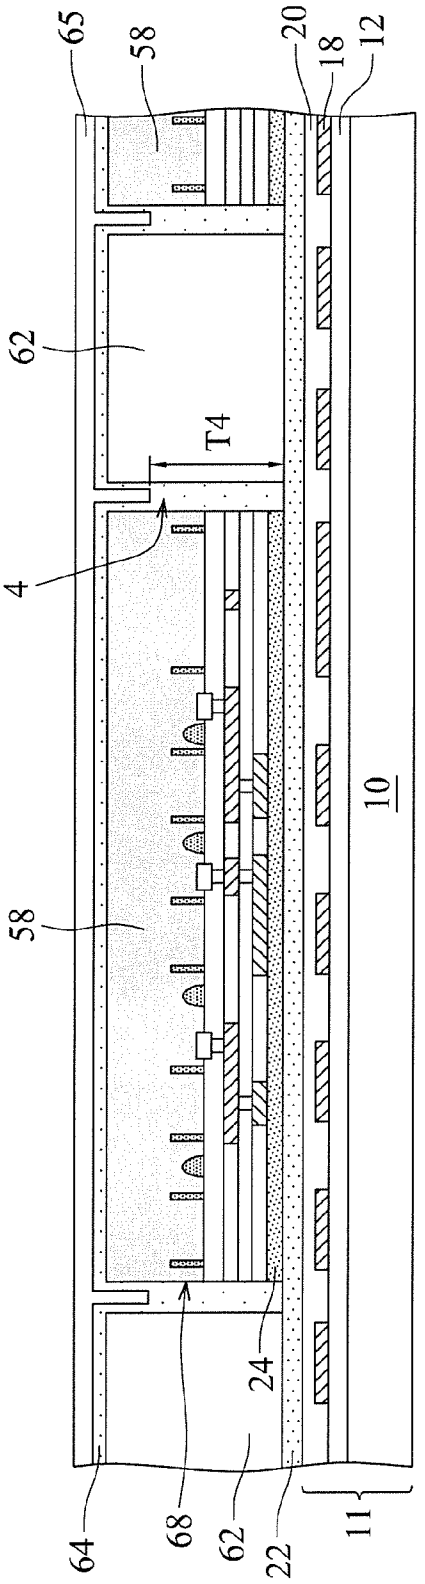


Fig. 145

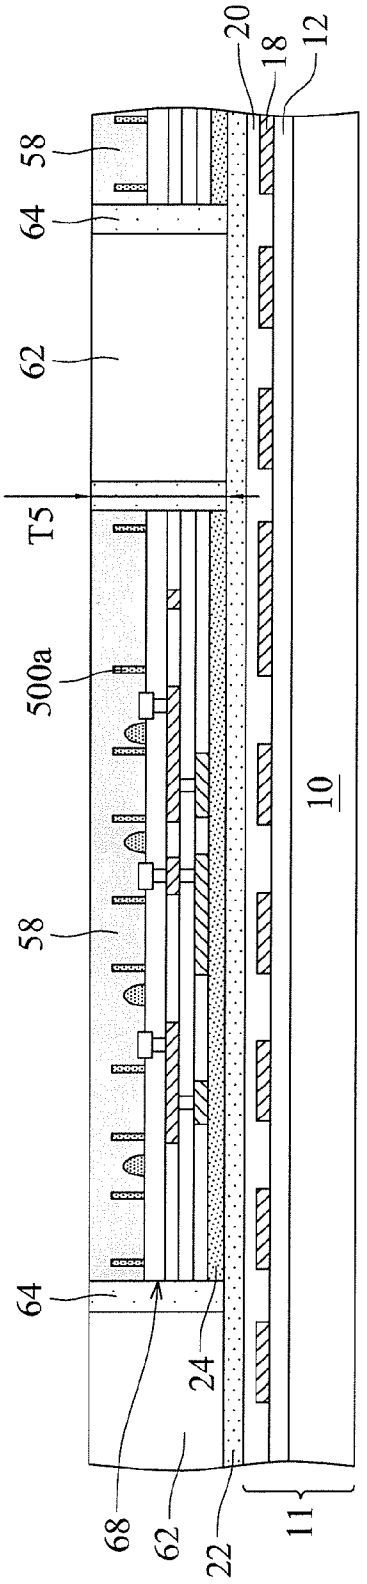


Fig. 146

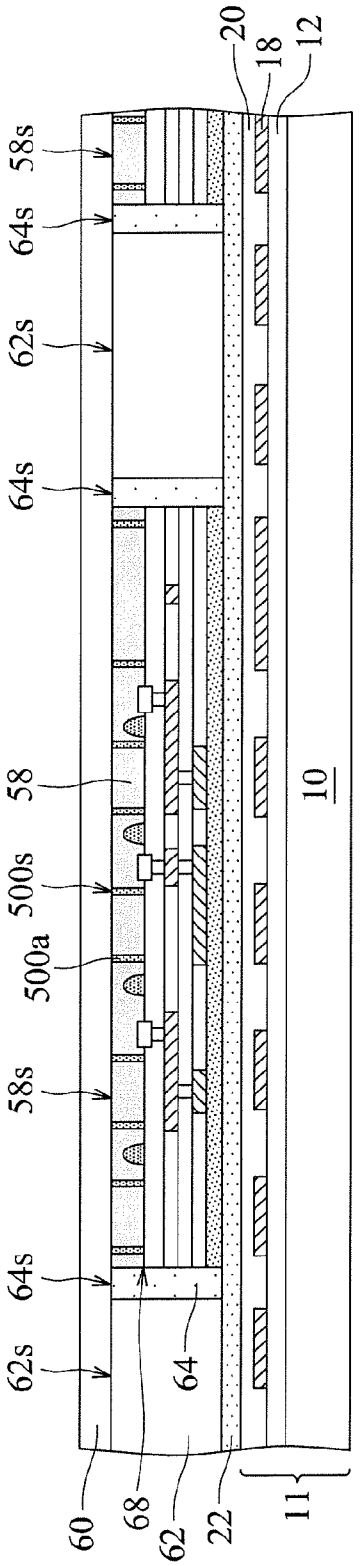


Fig. 147

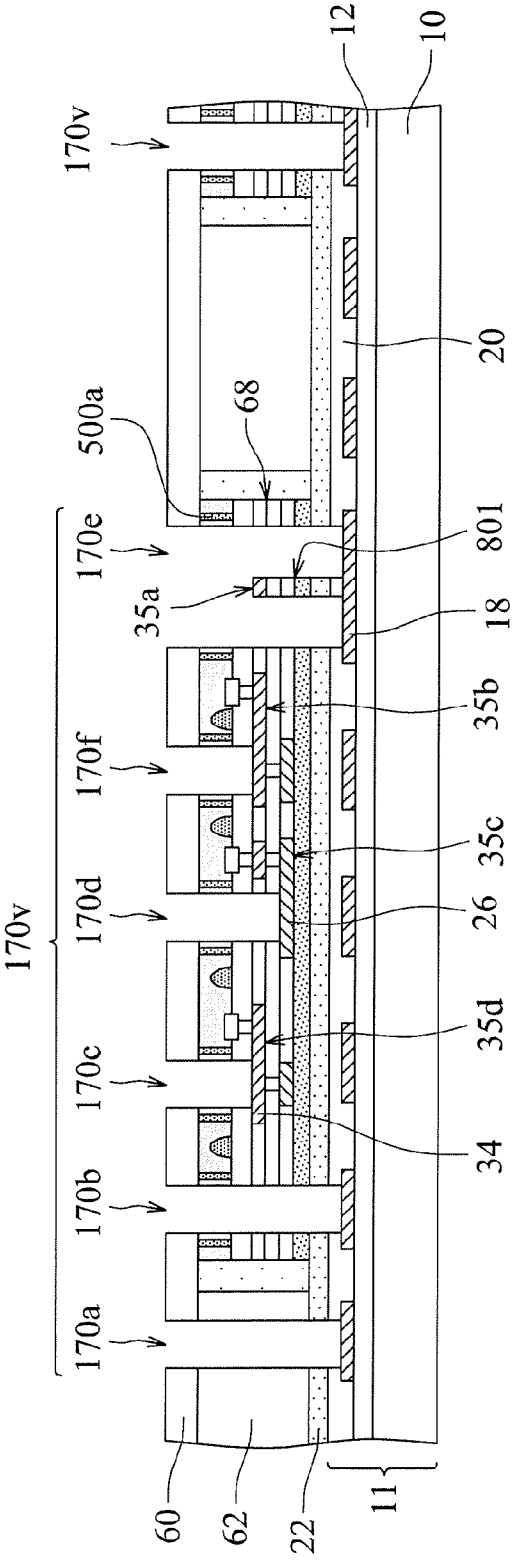


Fig. 148

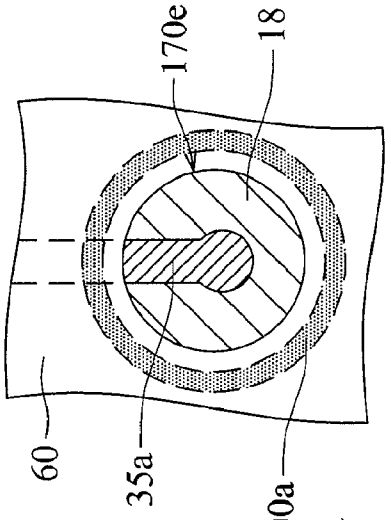


Fig. 151

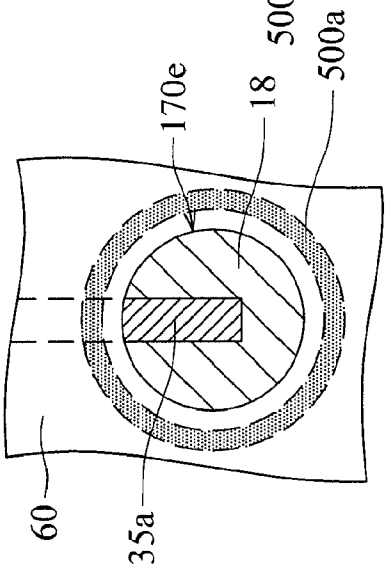


Fig. 150

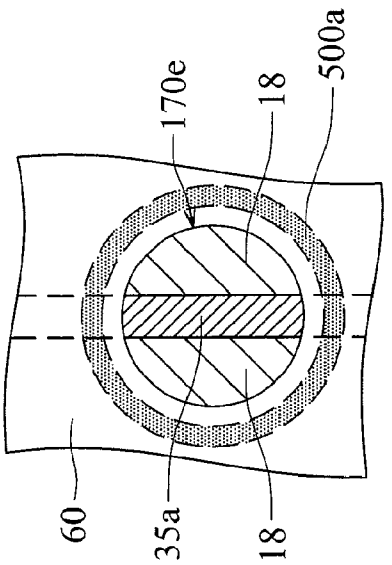


Fig. 149

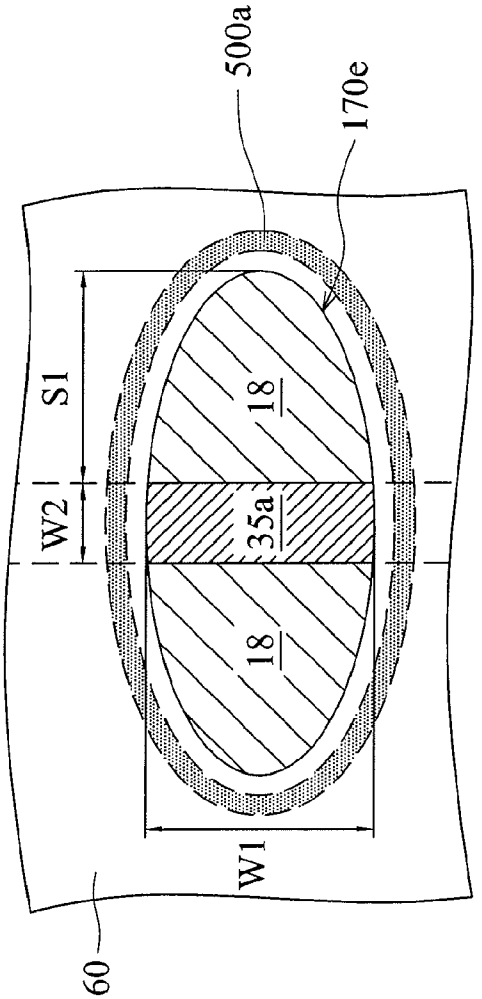


Fig. 152

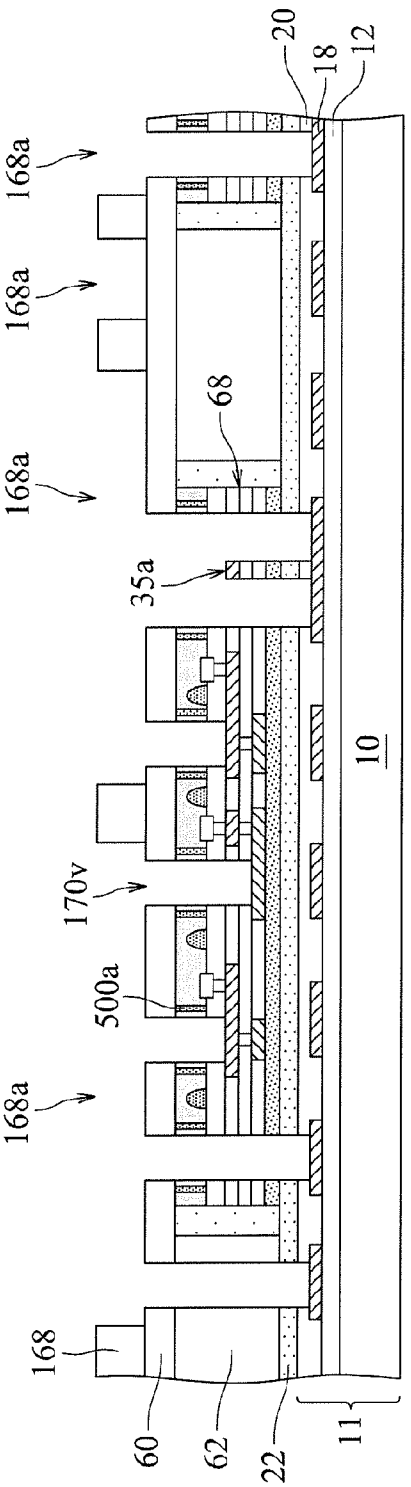


Fig. 153

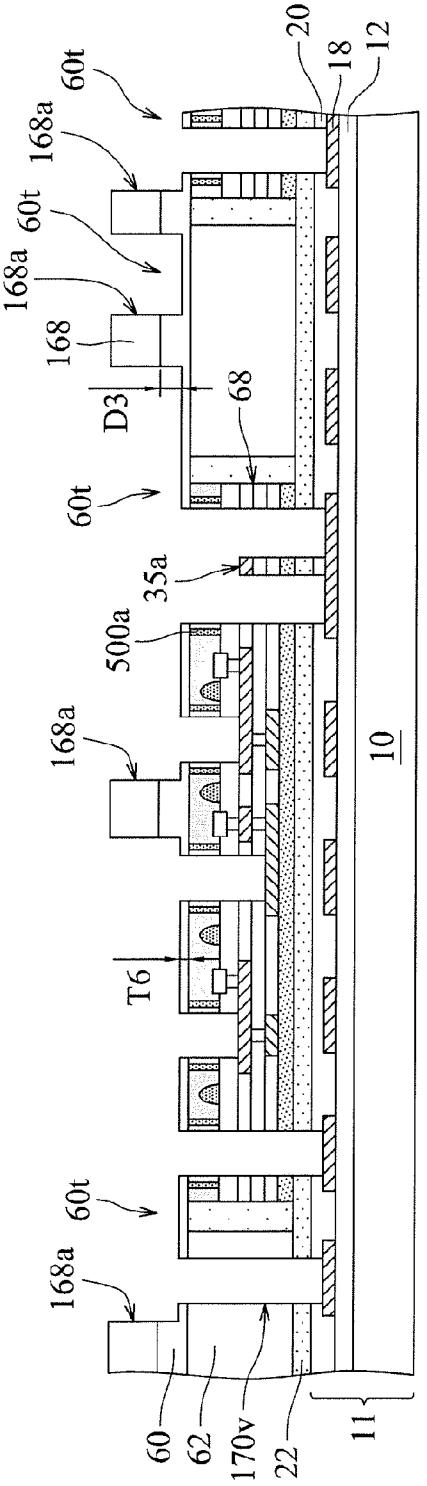


Fig. 154

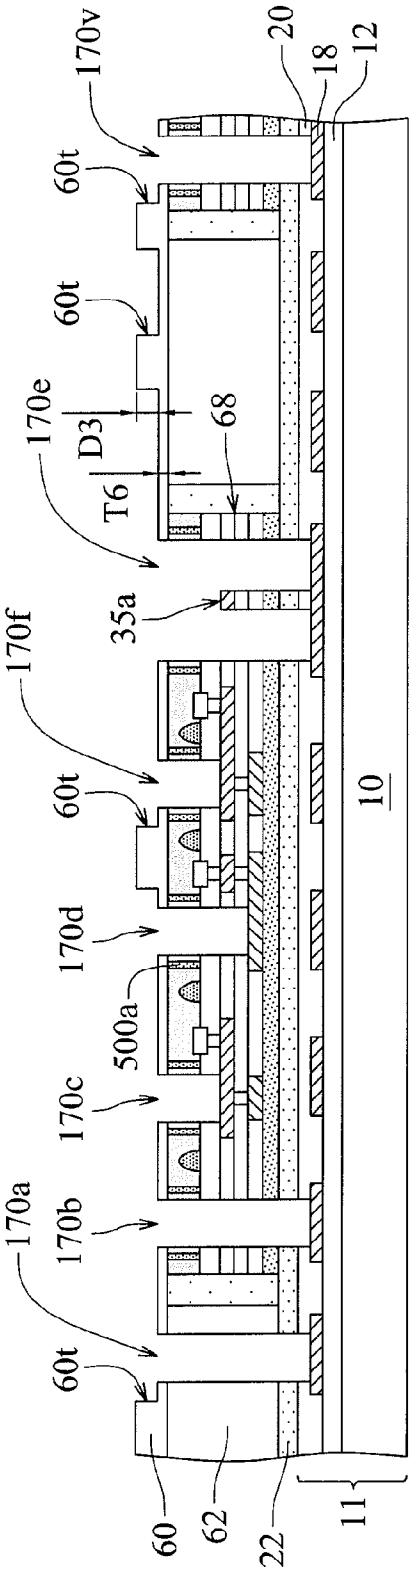


Fig. 155

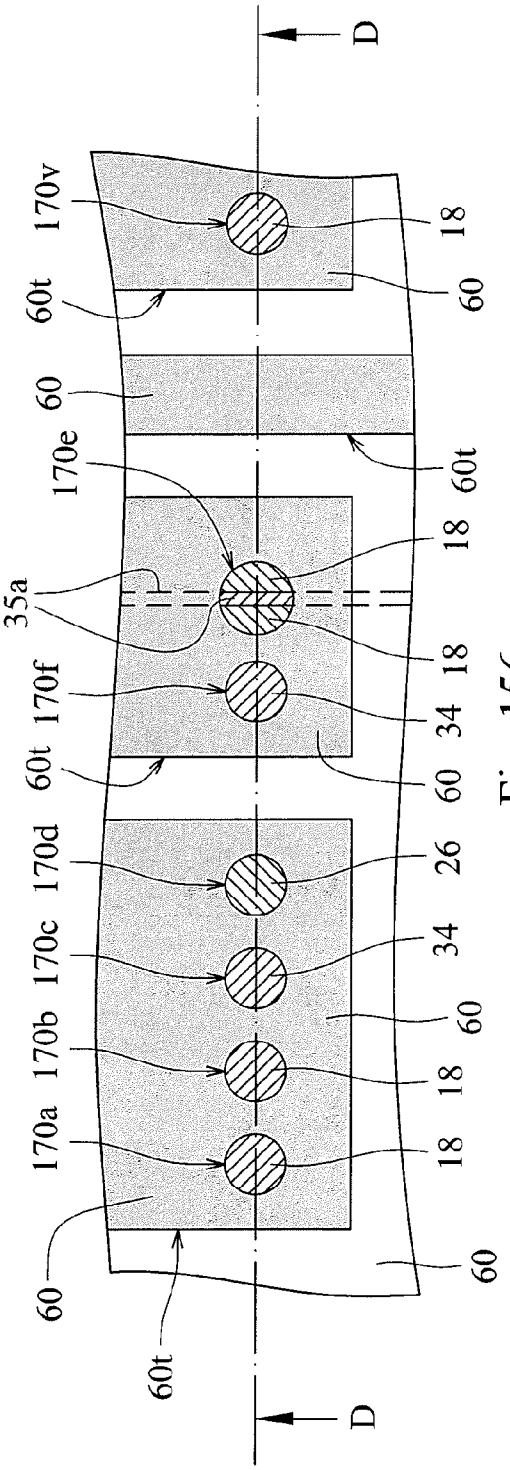


Fig. 156

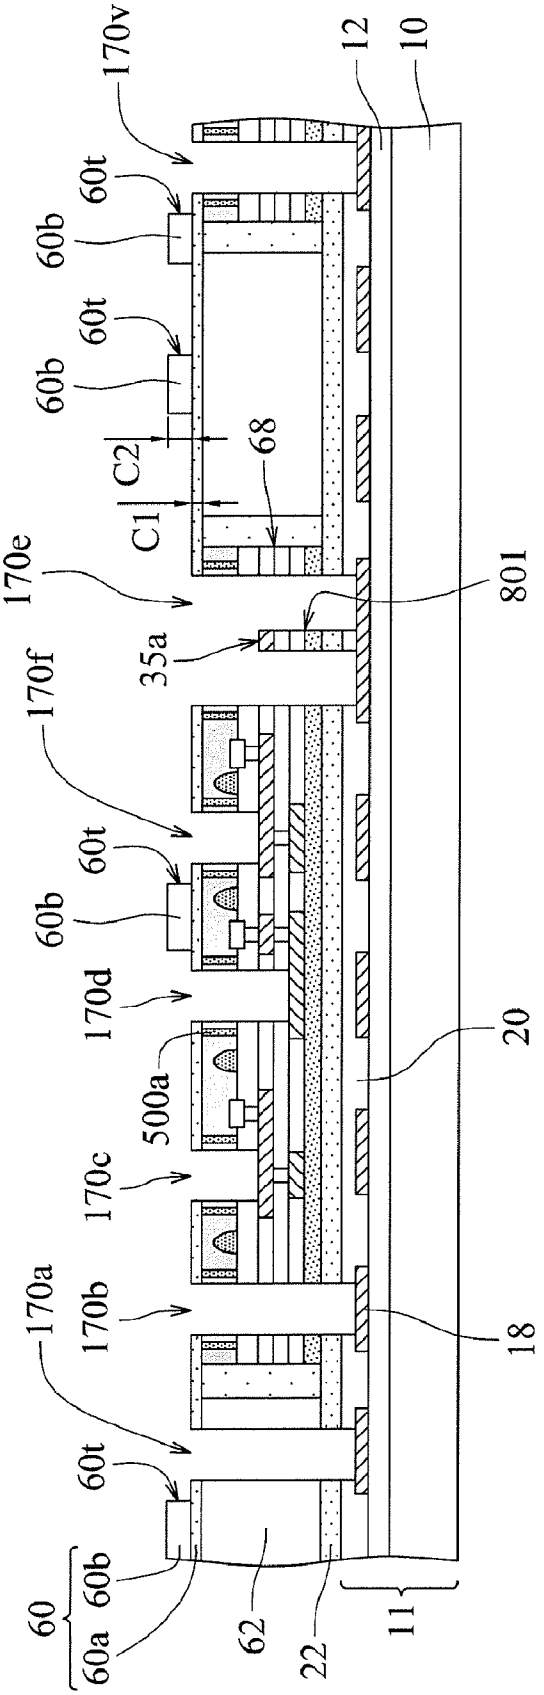

170v
12
10
60t
60b
60t
60b
C2
68
C1
170e
801
35a
170f
60t
60b
170d
20
500a
170c
170a
170b
18
60t
60
60b
60a
62
22
11

Fig. 155A

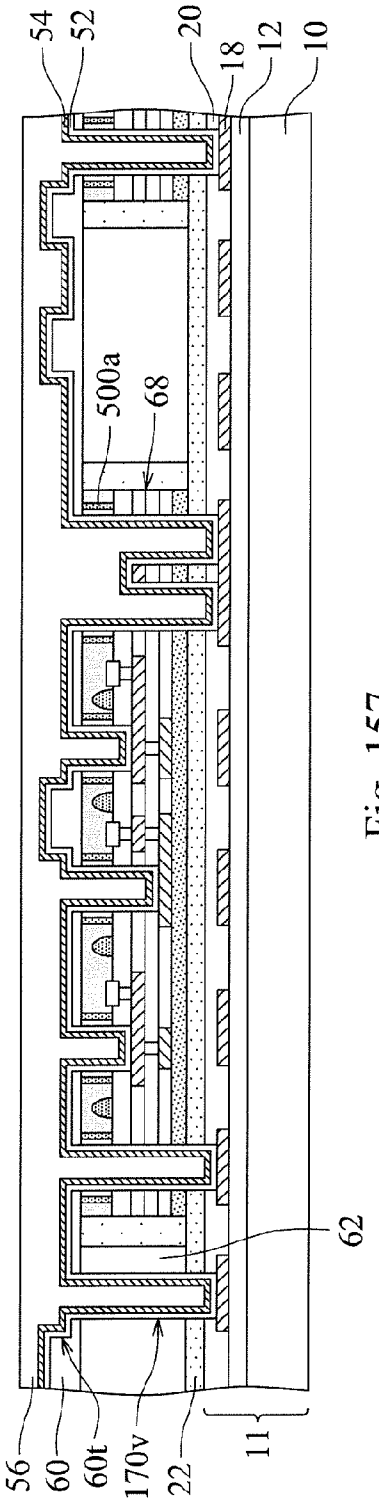


Fig. 157

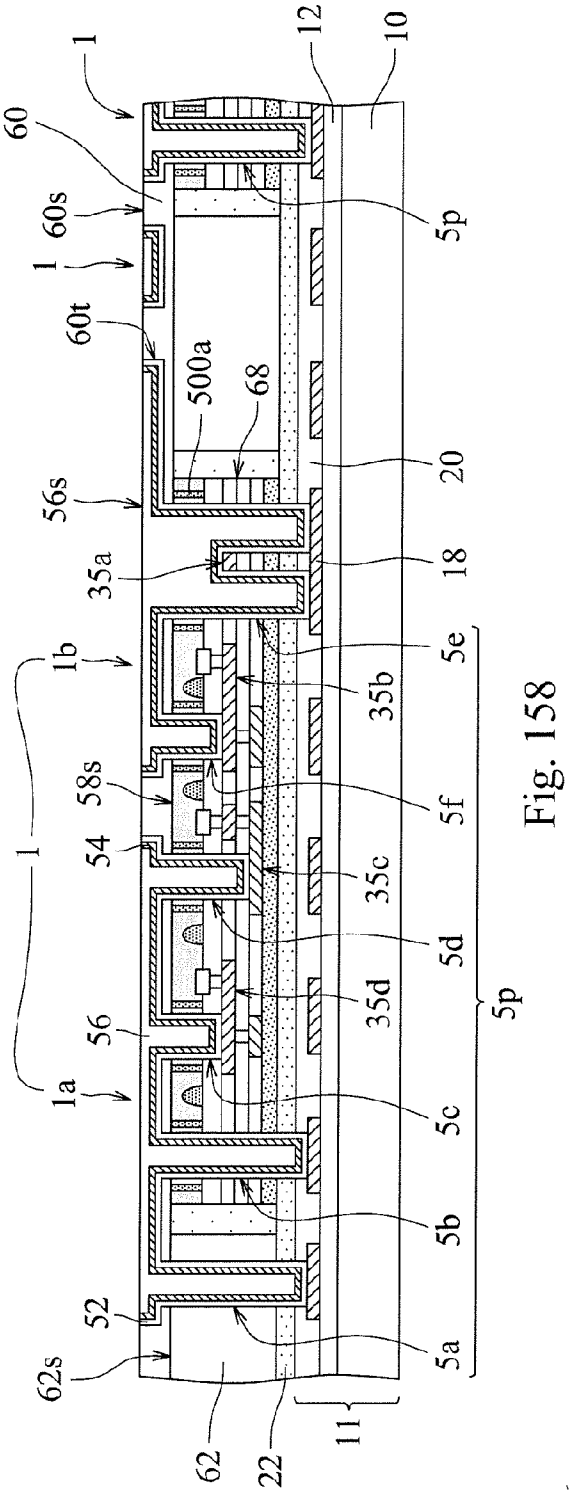


Fig. 158

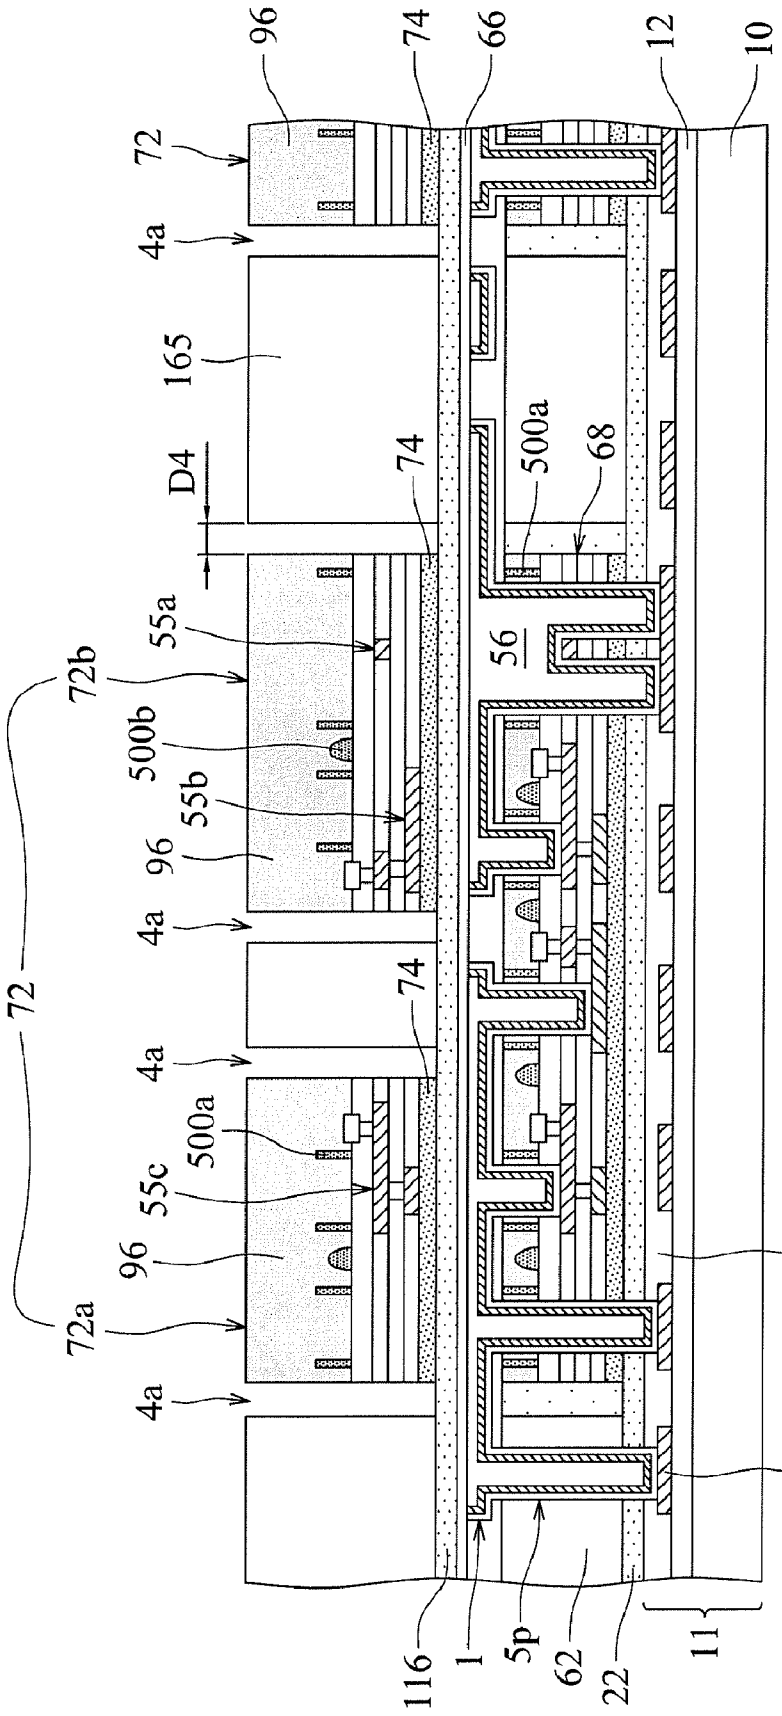

96
74
66
12
10
72
4a
165
D4
74
500a
68
55a
56
72b
500b
55b
96
4a
72
74
4a
500a
55c
96
72a
4a
20
18
116
1
5p
62
22
11

Fig. 159

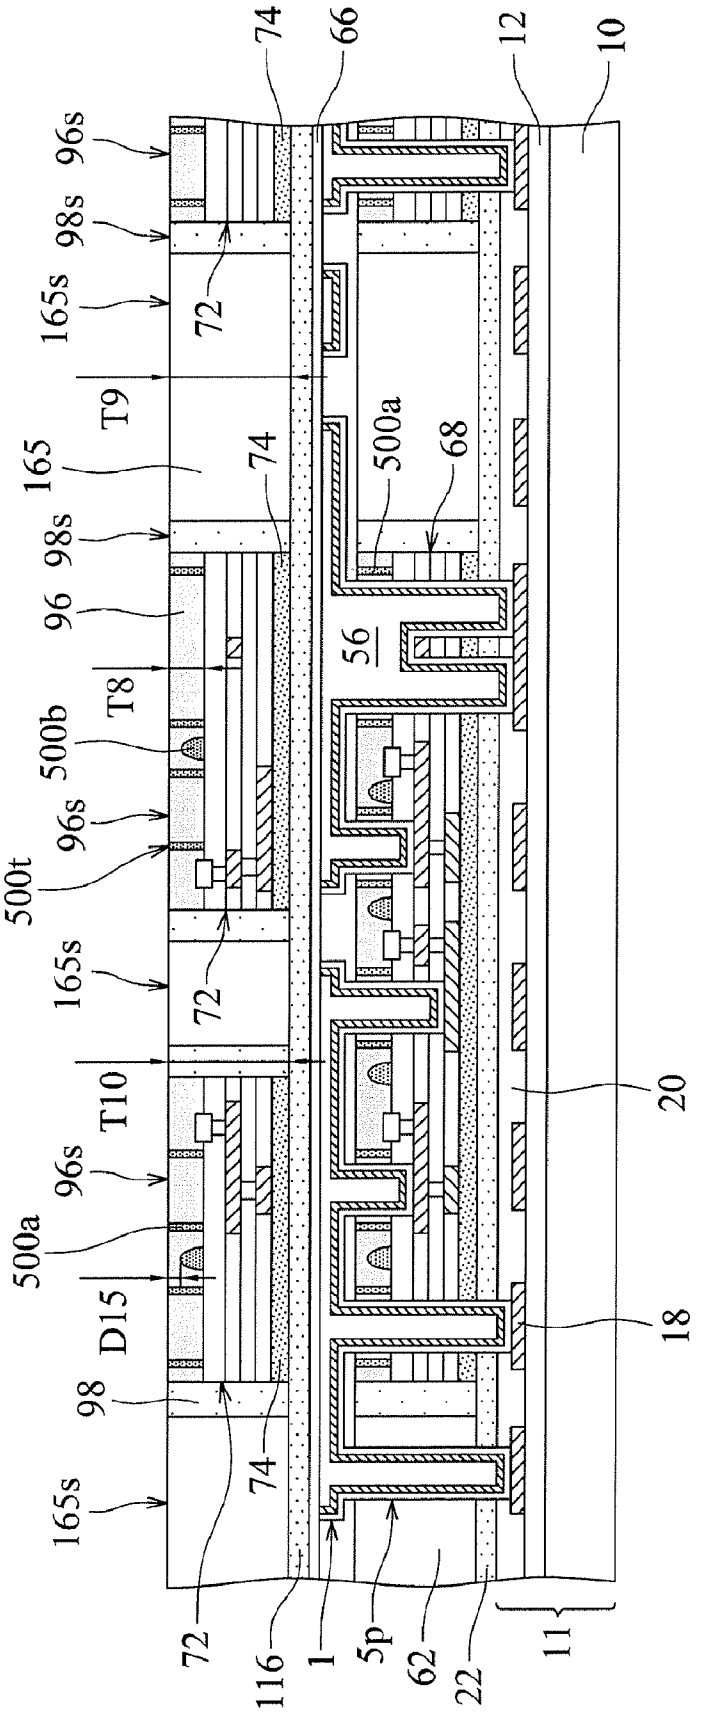

74
66
12
10
96s
98s
165s
72
T9
165
74
500a
68
98s
96
56
T8
500b
96s
500t
165s
72
T10
20
96s
500a
D15
18
98
74
165s
72
116
1
5p
62
22
11

Fig. 160

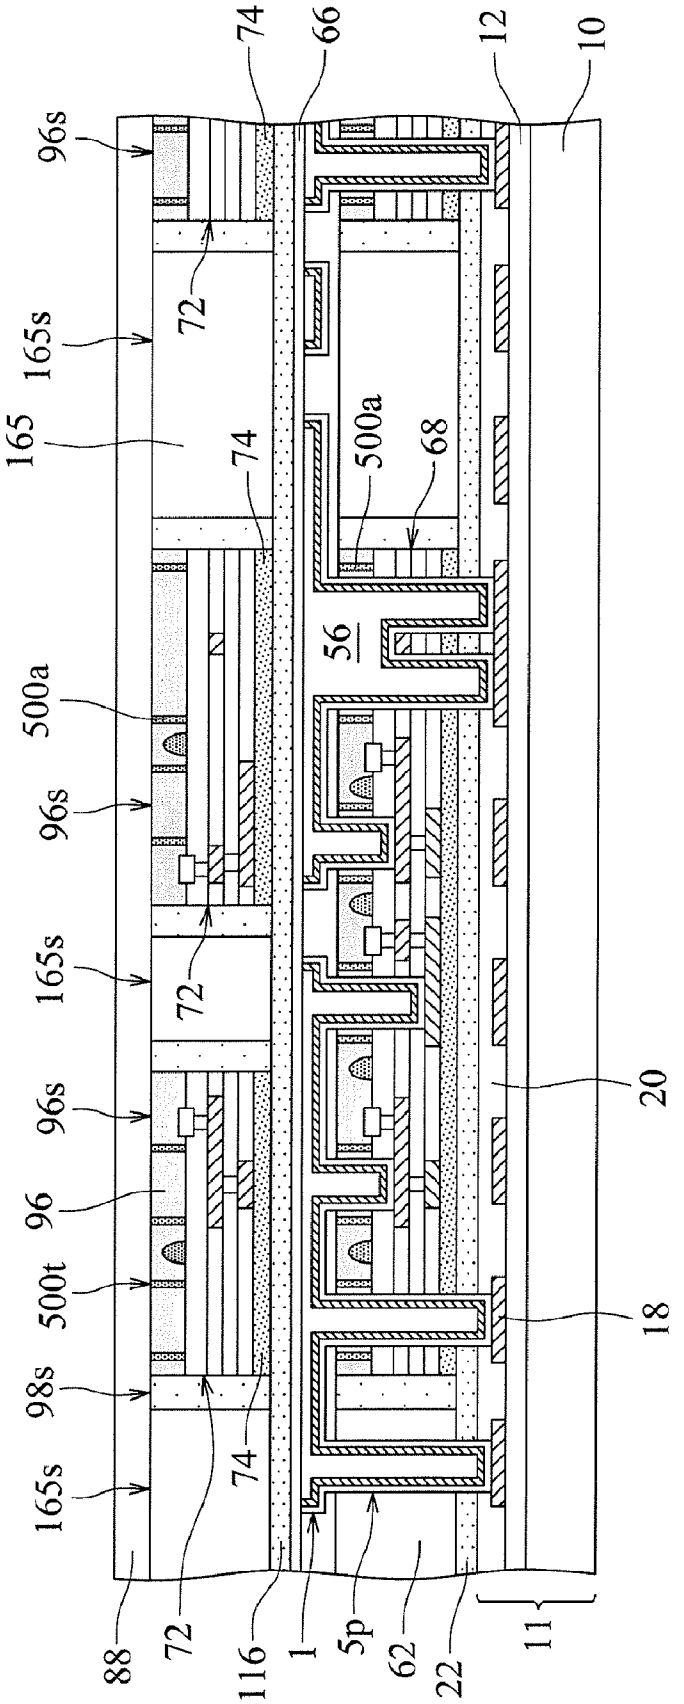

74
66
12
10
96s
72
165s
165
74
500a
68
56
500a
96s
72
165s
96s
96
500t
98s
165s
74
20
18
88
72
116
1
5p
62
22
11

Fig. 161

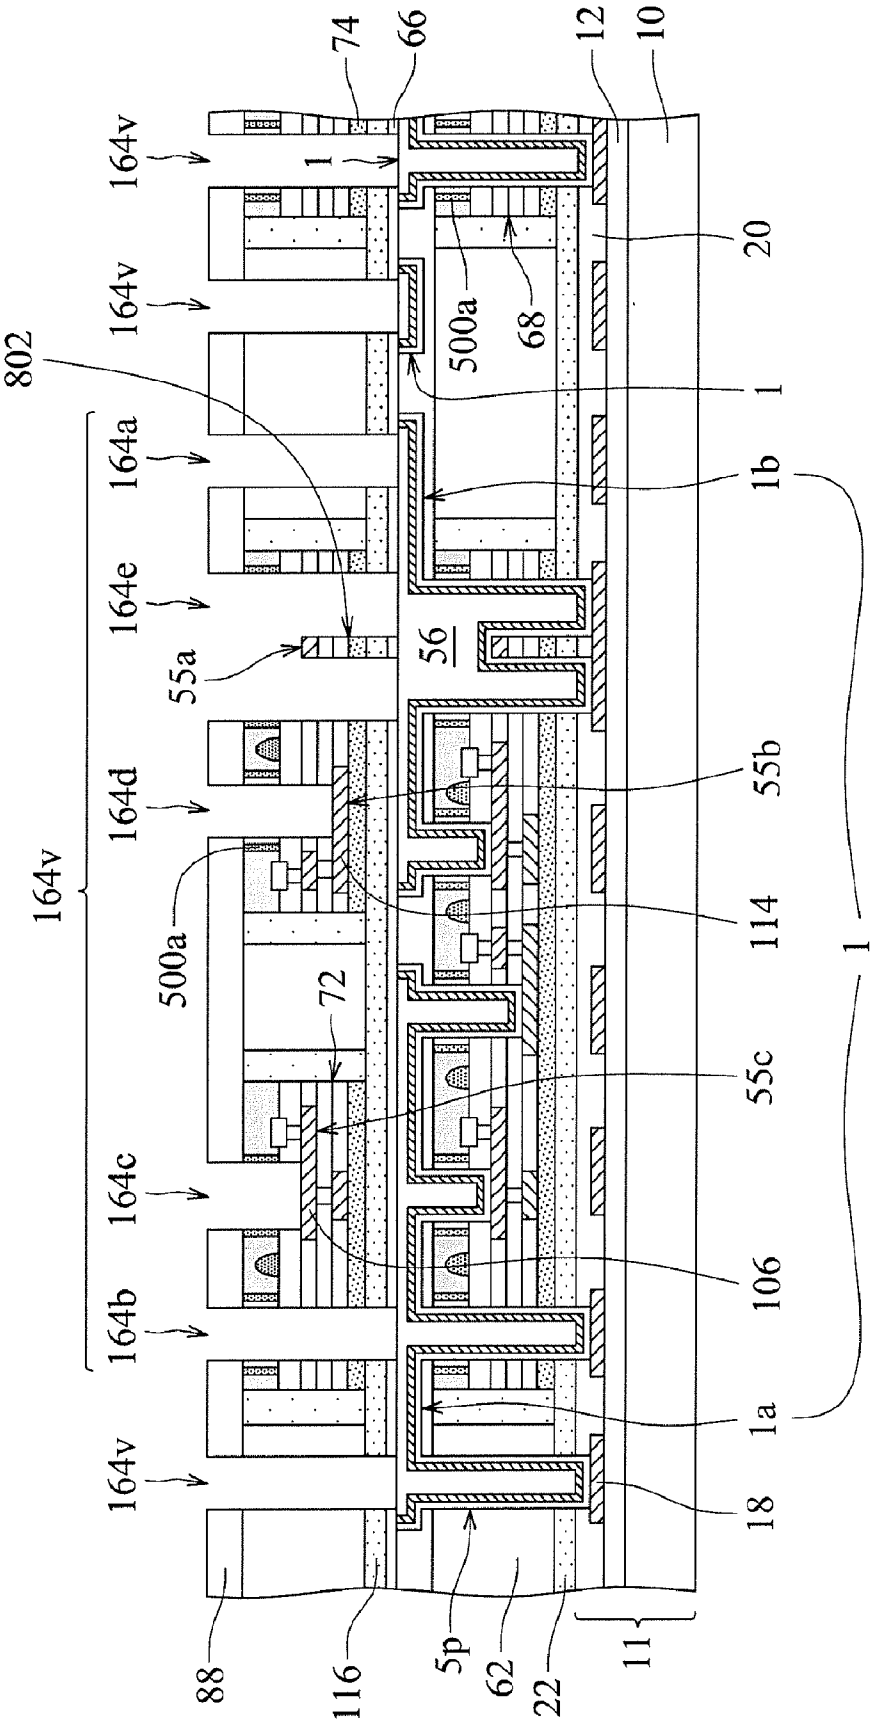

74
66
12
10
164v
1
20
164v
500a
68
802
1
164a
1b
164e
56
55a
164d
55b
164v
500a
72
114
1
55c
164c
106
164b
1a
164v
18
88
116
5p
62
22
11

Fig. 162

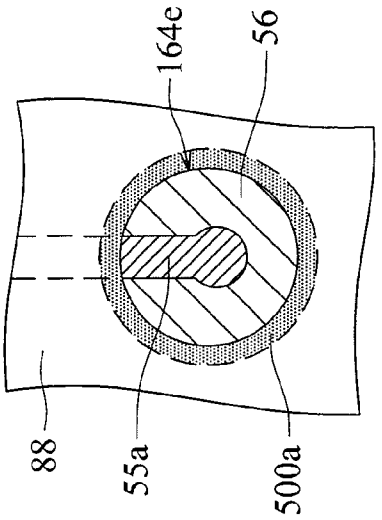


Fig. 165

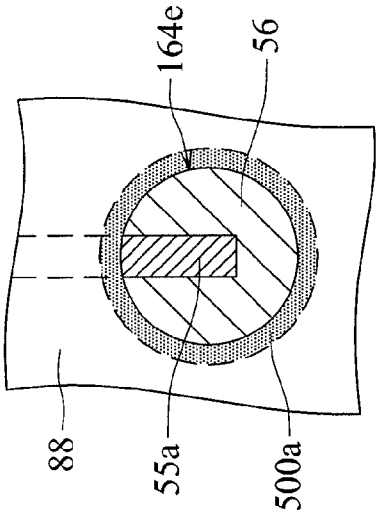


Fig. 164

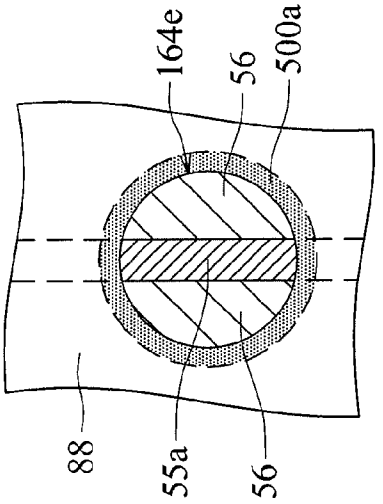


Fig. 163

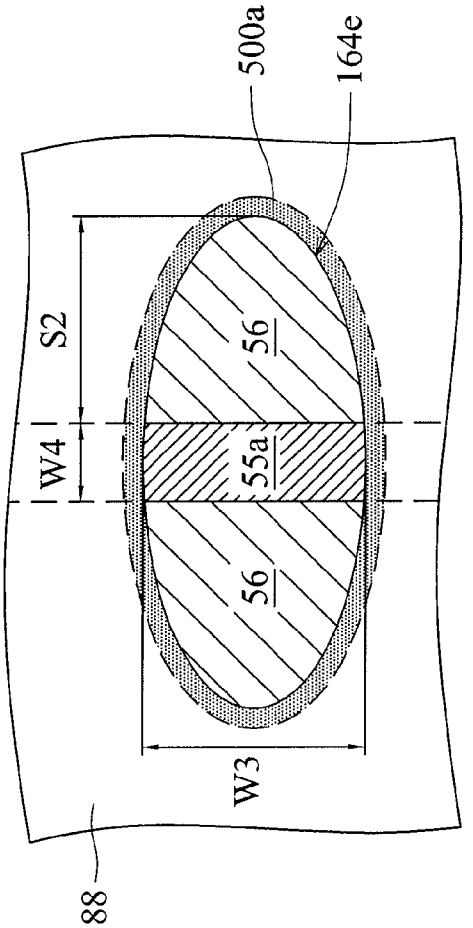


Fig. 166

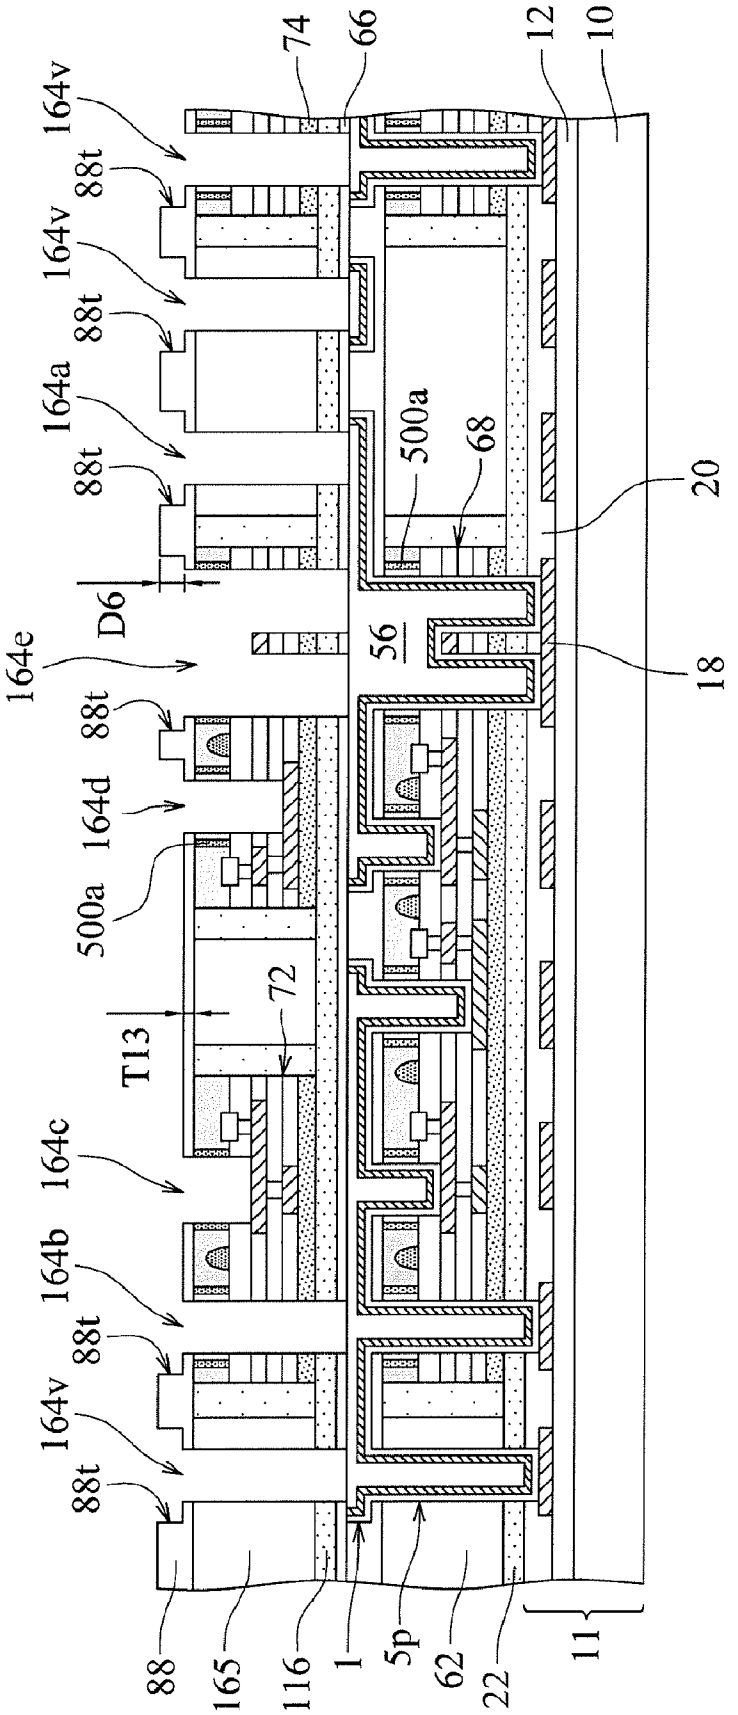

74
66
12
10
164v
88t
164v
88t
164a
88t
500a
68
20
D6
164e
56
18
88t
164d
500a
72
T13
164c
164b
88t
164v
88t
88
165
116
1
5p
62
22
11

Fig. 167

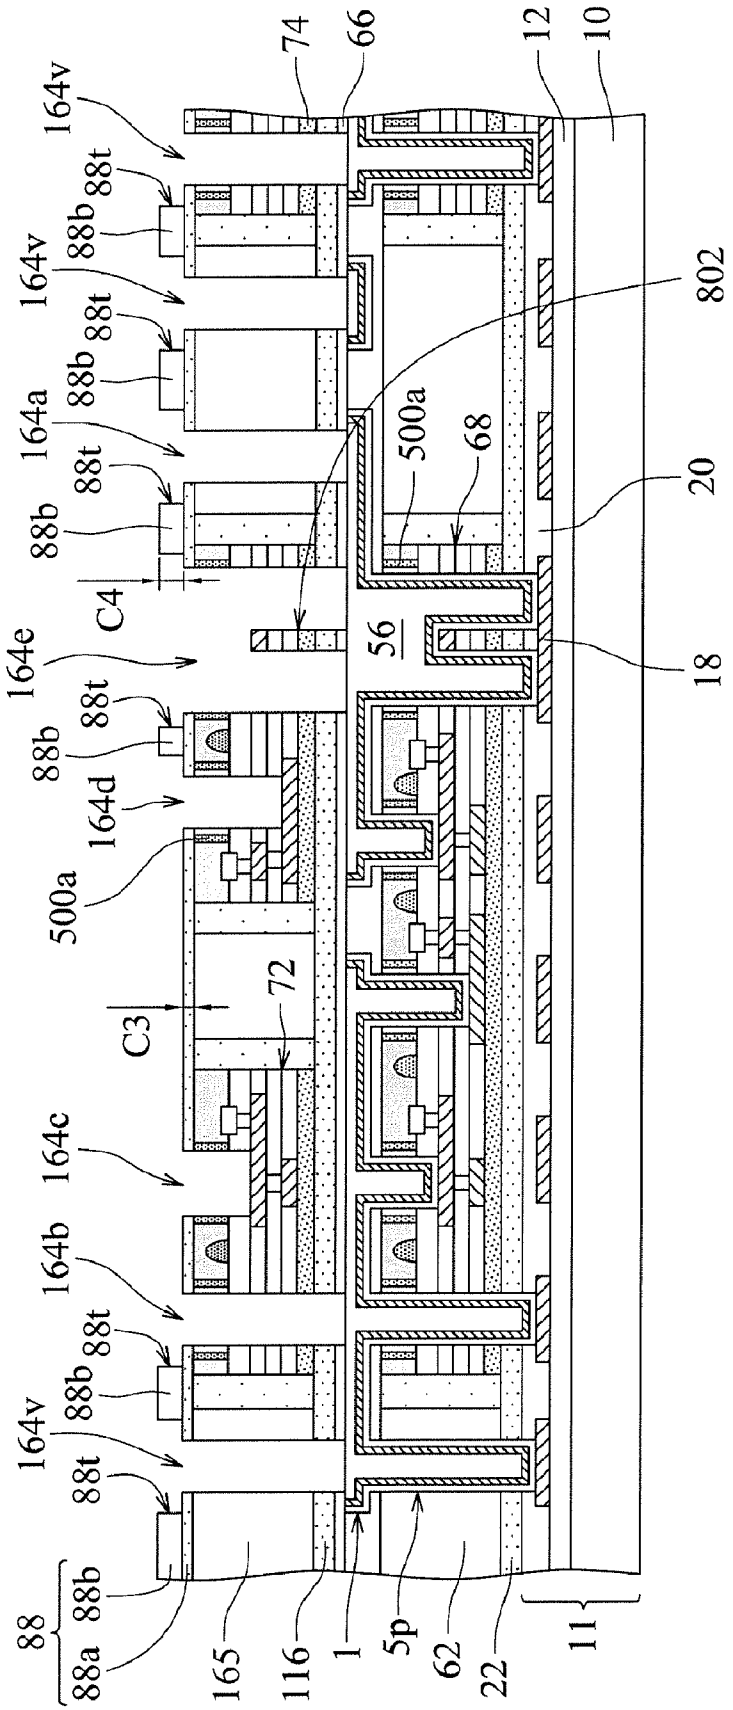

74
66
12
10
164v
88t
88b
164v
88t
88b
164a
88t
88b
C4
164e
88t
88b
164d
500a
C3
72
164c
164b
88t
88b
164v
88t
88
88a
88b
165
116
1
5p
62
22
11
56
500a
68
20
802
18

Fig. 167A

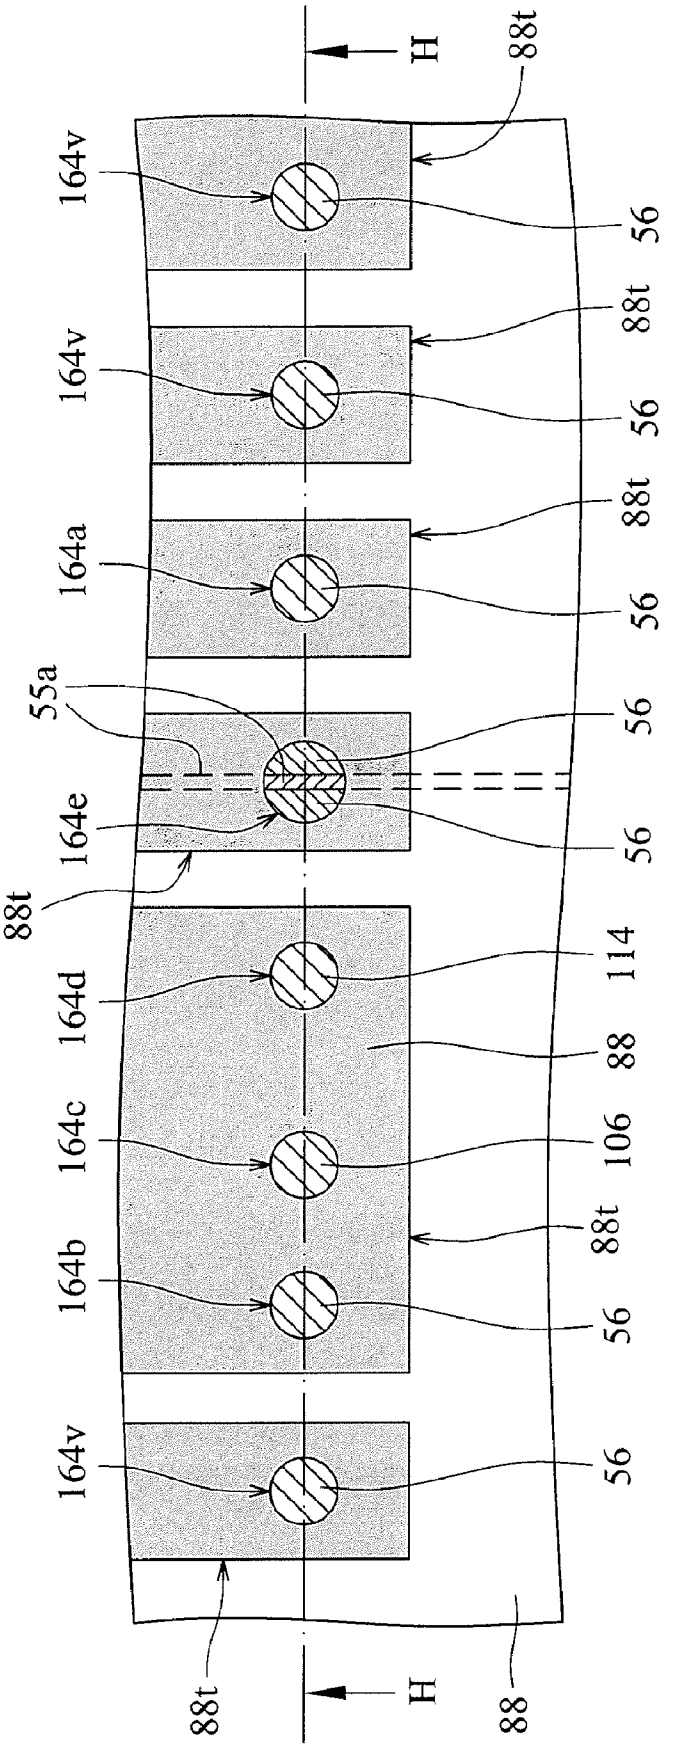

H
88t
164v
56
88t
164v
56
88t
164a
56
55a
56
164e
56
88t
114
164d
88
106
164c
88t
164b
56
164v
56
88t
H
88

Fig. 168

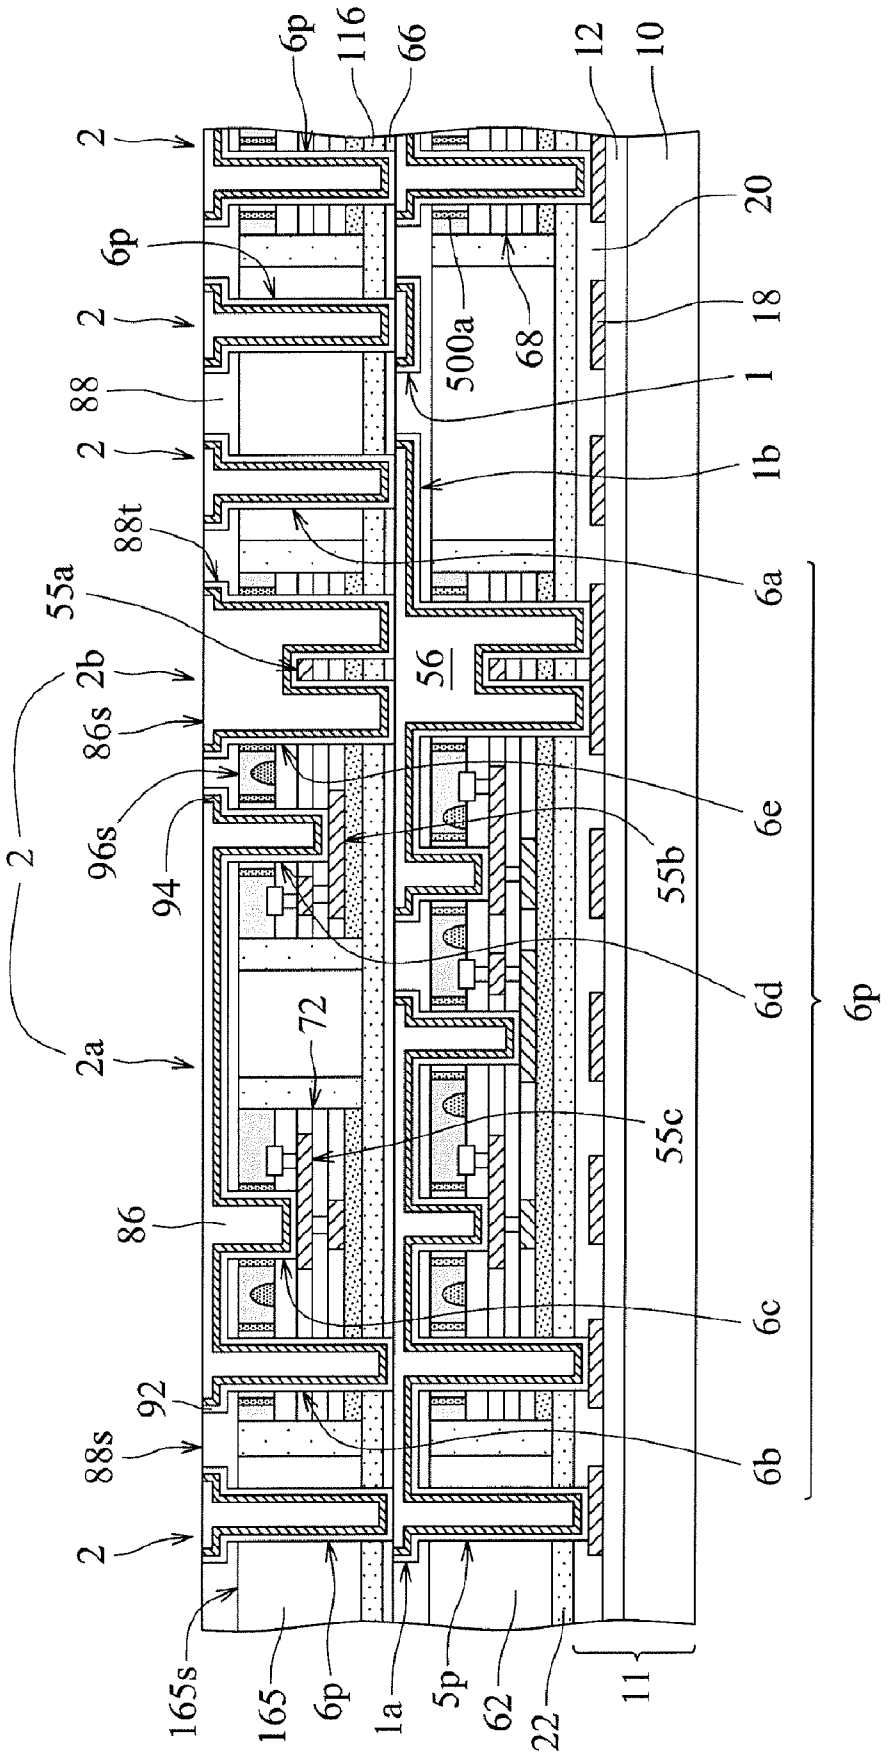

6p
116
66
12
10
2
20
6p
2
18
500a
68
88
1
2
1b
88t
6a
55a
56
2b
86s
6e
96s
94
55b
2
6d
6p
72
2a
55c
86
6c
92
88s
6b
2
165s
165
6p
1a
5p
62
22
11

Fig. 169

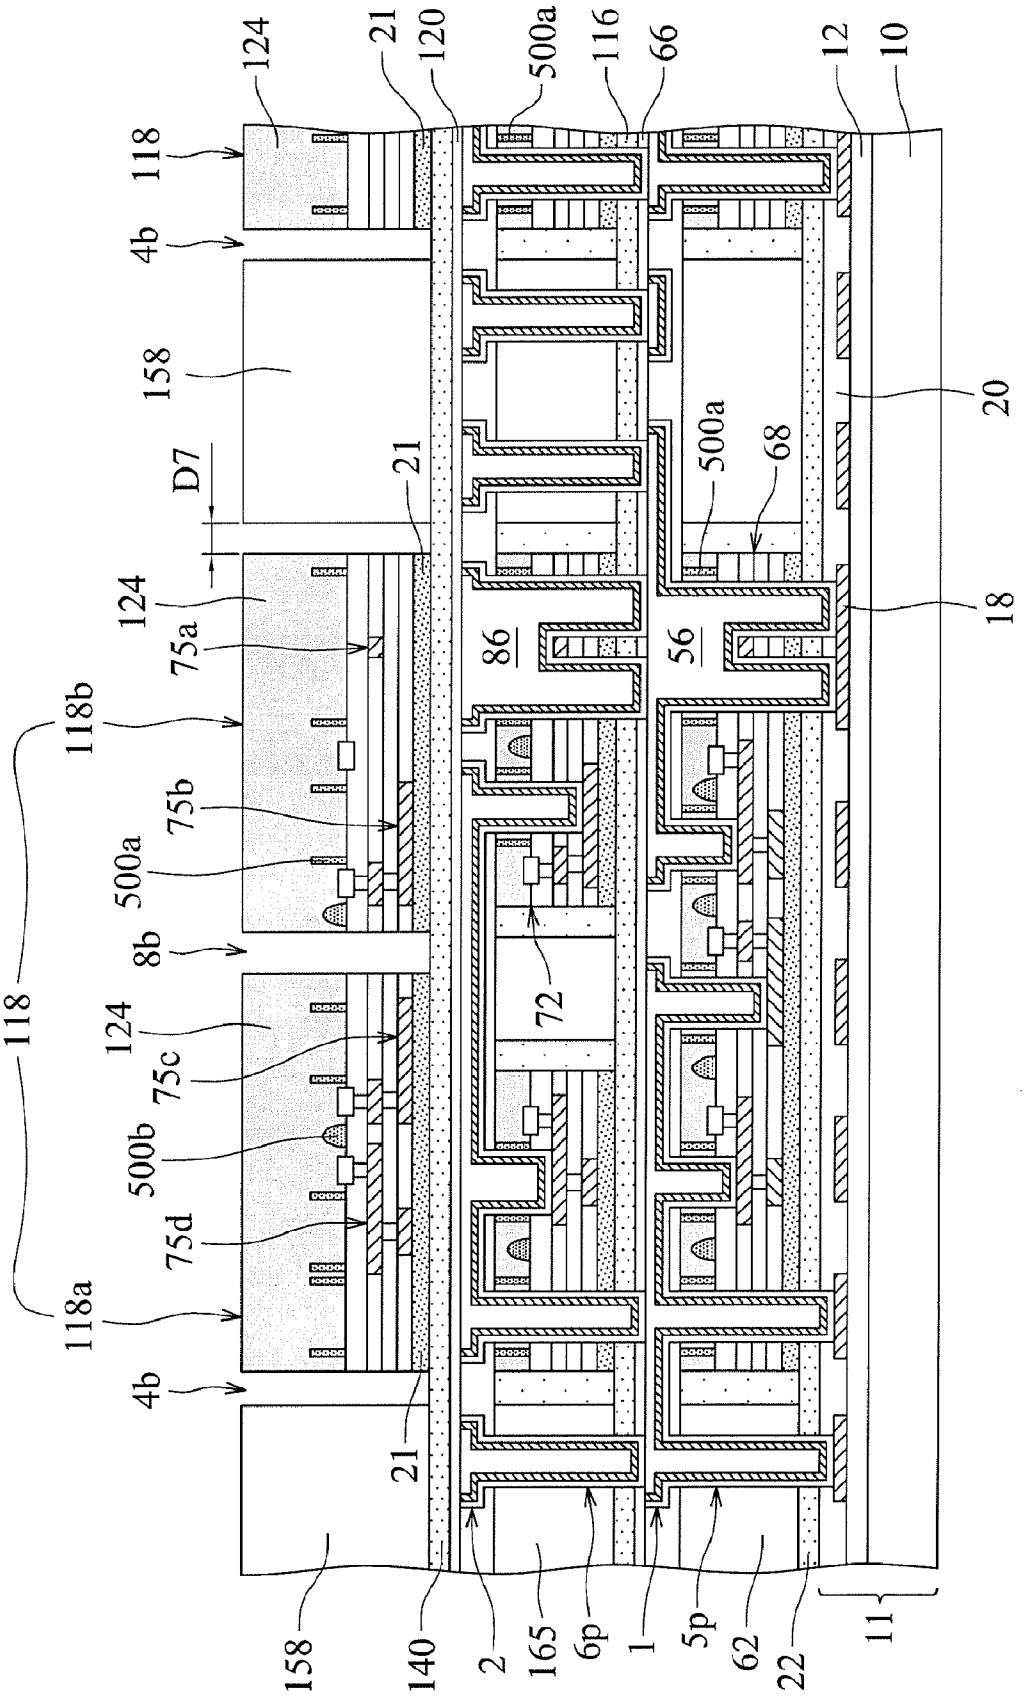

124
21
120
500a
116
66
12
10
118
4b
158
D7
21
500a
68
20
124
75a
86
56
18
118b
75b
500a
8b
72
118
124
75c
500b
75d
118a
4b
21
158
140
2
165
6p
1
5p
62
22
11

Fig. 170

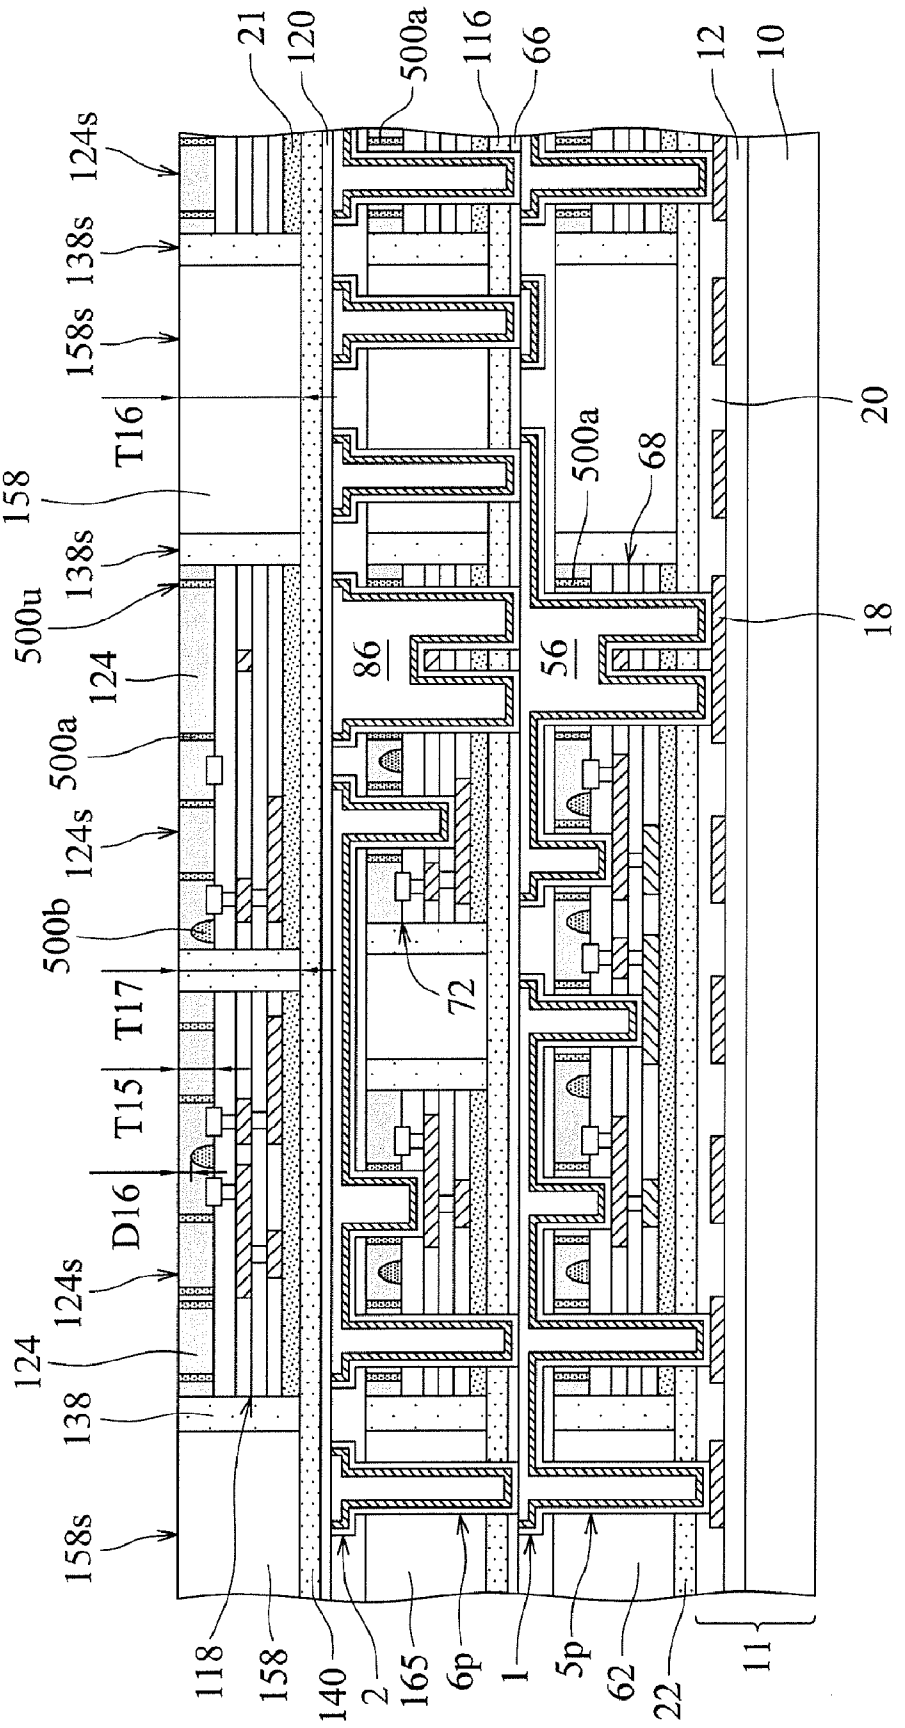

21
120
500a
116
66
12
10
124s
138s
158s
T16
158
138s
500u
124
500a
124s
500b
T17
T15
D16
124s
124
138
158s
20
500a
68
18
86
56
72
118
158
140
2
165
6p
1
5p
62
22
11

Fig. 171

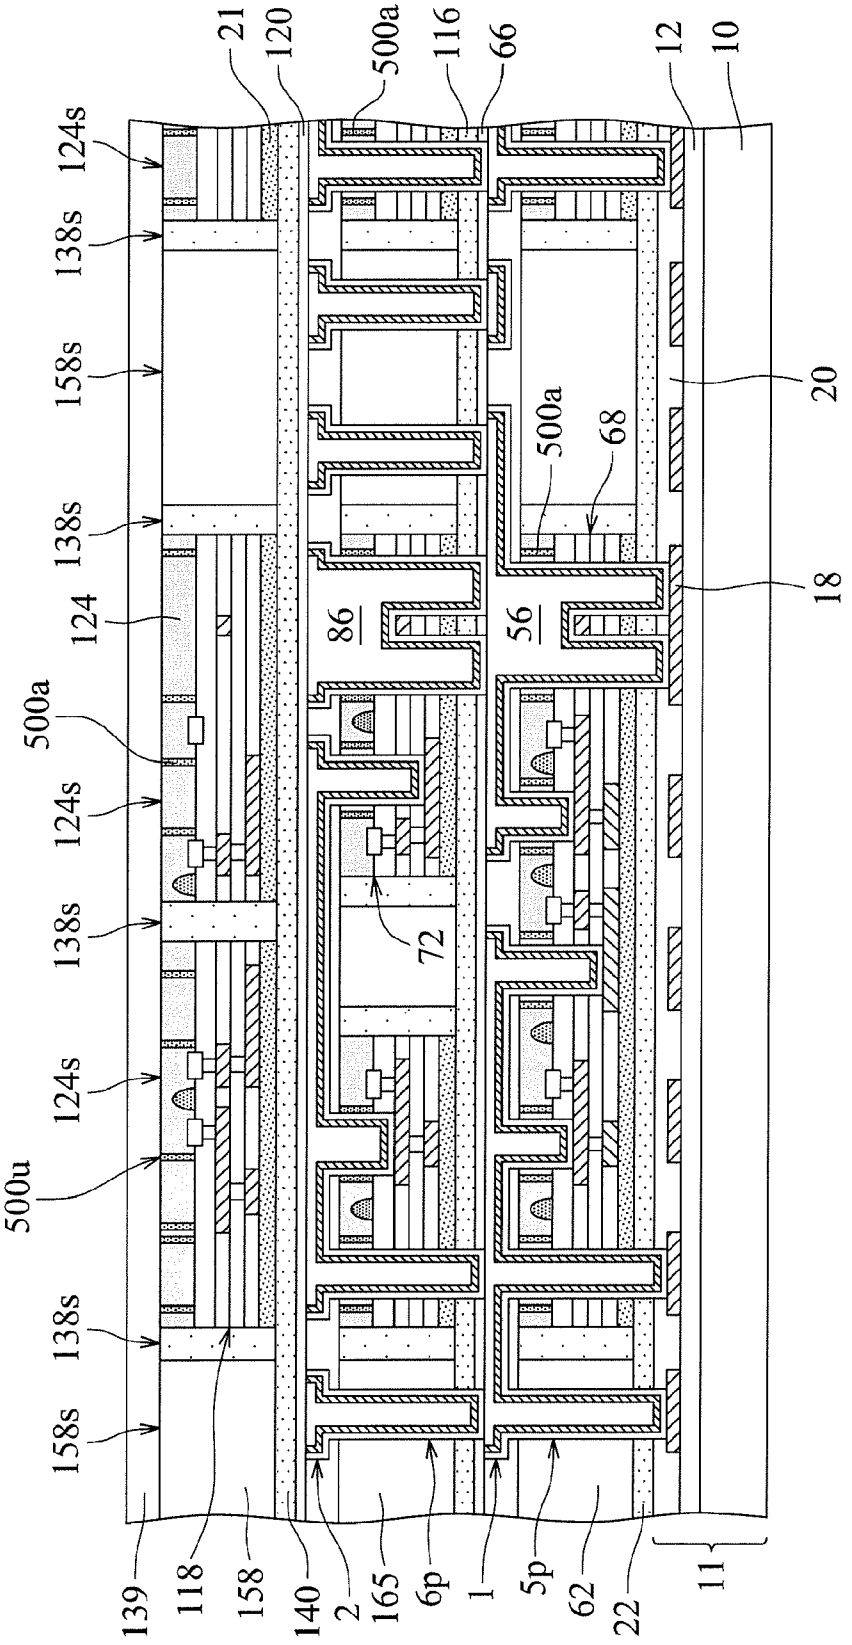

21
120
500a
116
66
12
10
124s
138s
158s
138s
124
500a
124s
138s
124s
500u
138s
158s
86
56
72
500a
68
20
18
139
118
158
140
2
165
6p
1
5p
62
22
11

Fig. 172

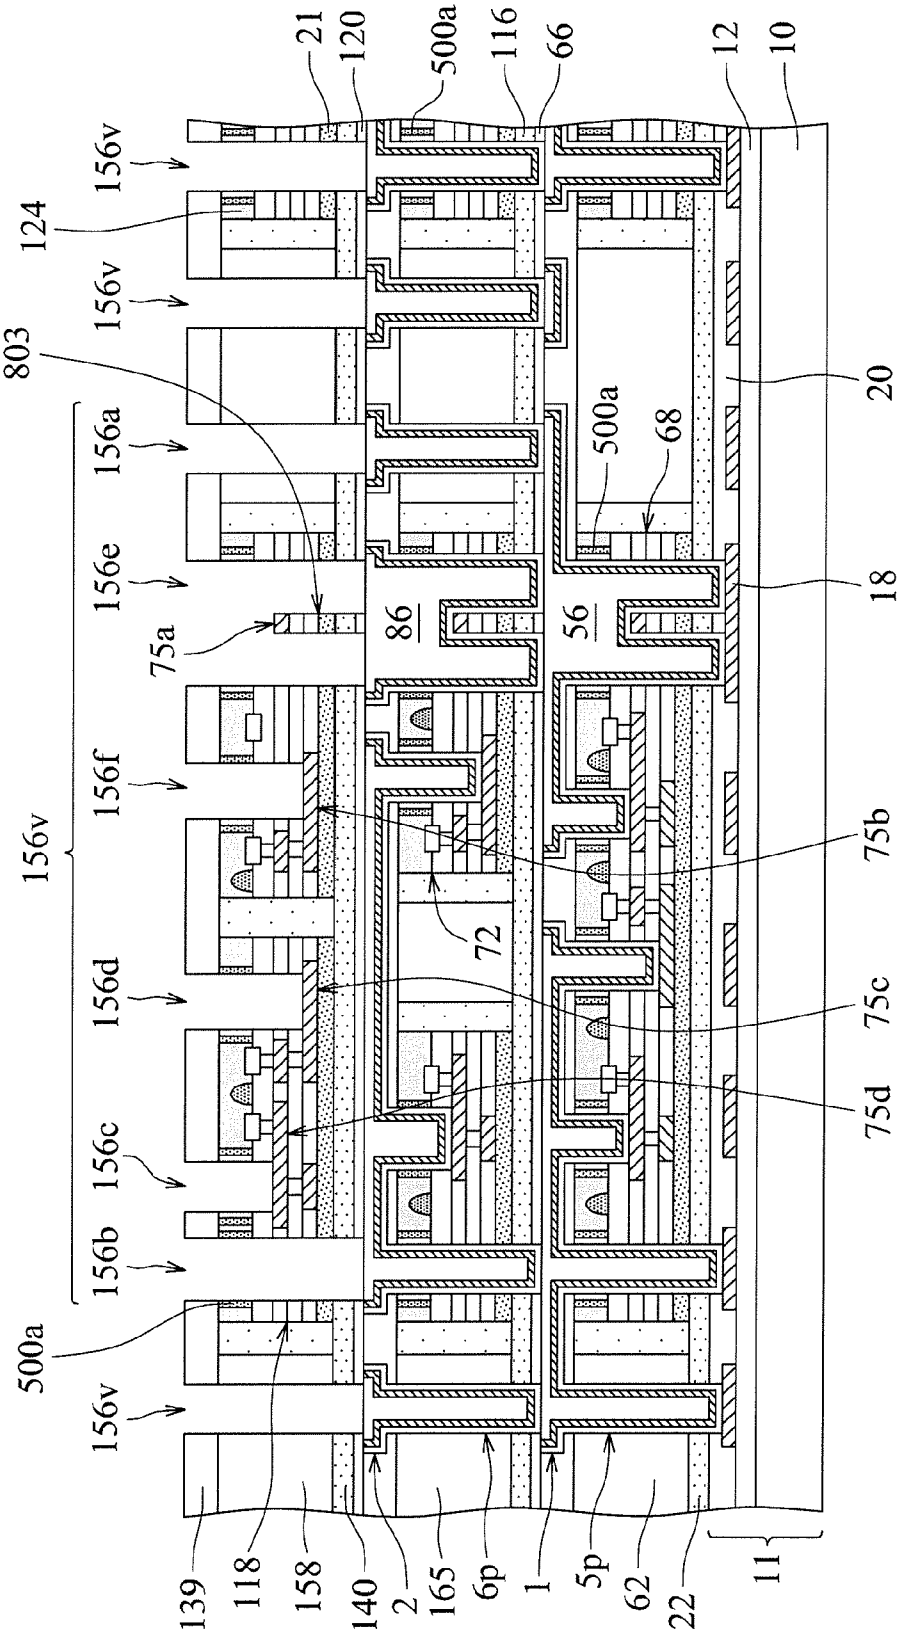

21
120
500a
116
66
12
10
156v
124
803
156a
156e
75a
86
56
500a
68
20
18
156f
75b
72
156d
75c
75d
156c
156b
500a
139
118
158
140
2
165
6p
1
5p
62
22
11

Fig. 173

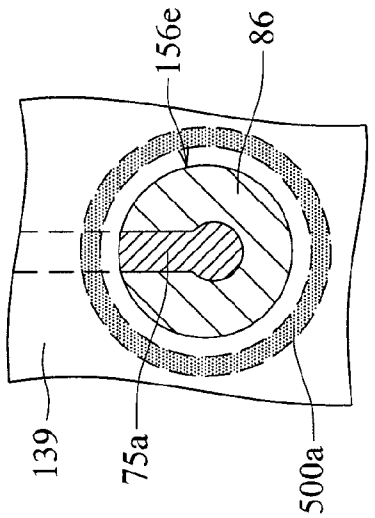


Fig. 176

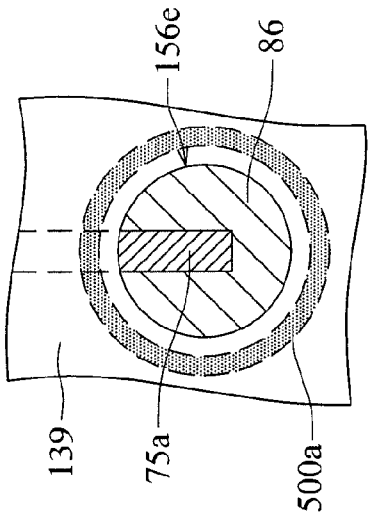


Fig. 175

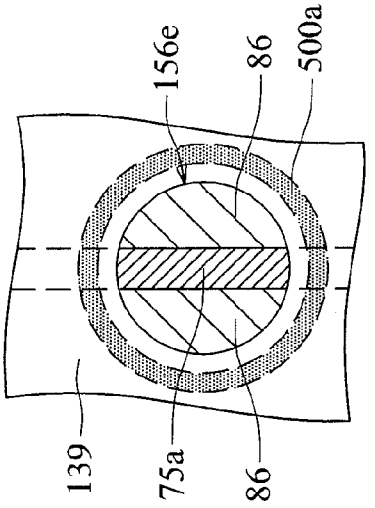


Fig. 174

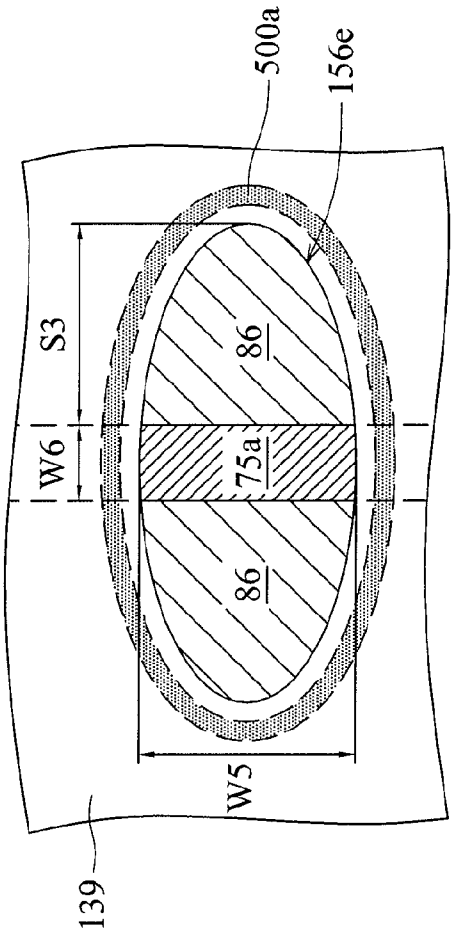


Fig. 177

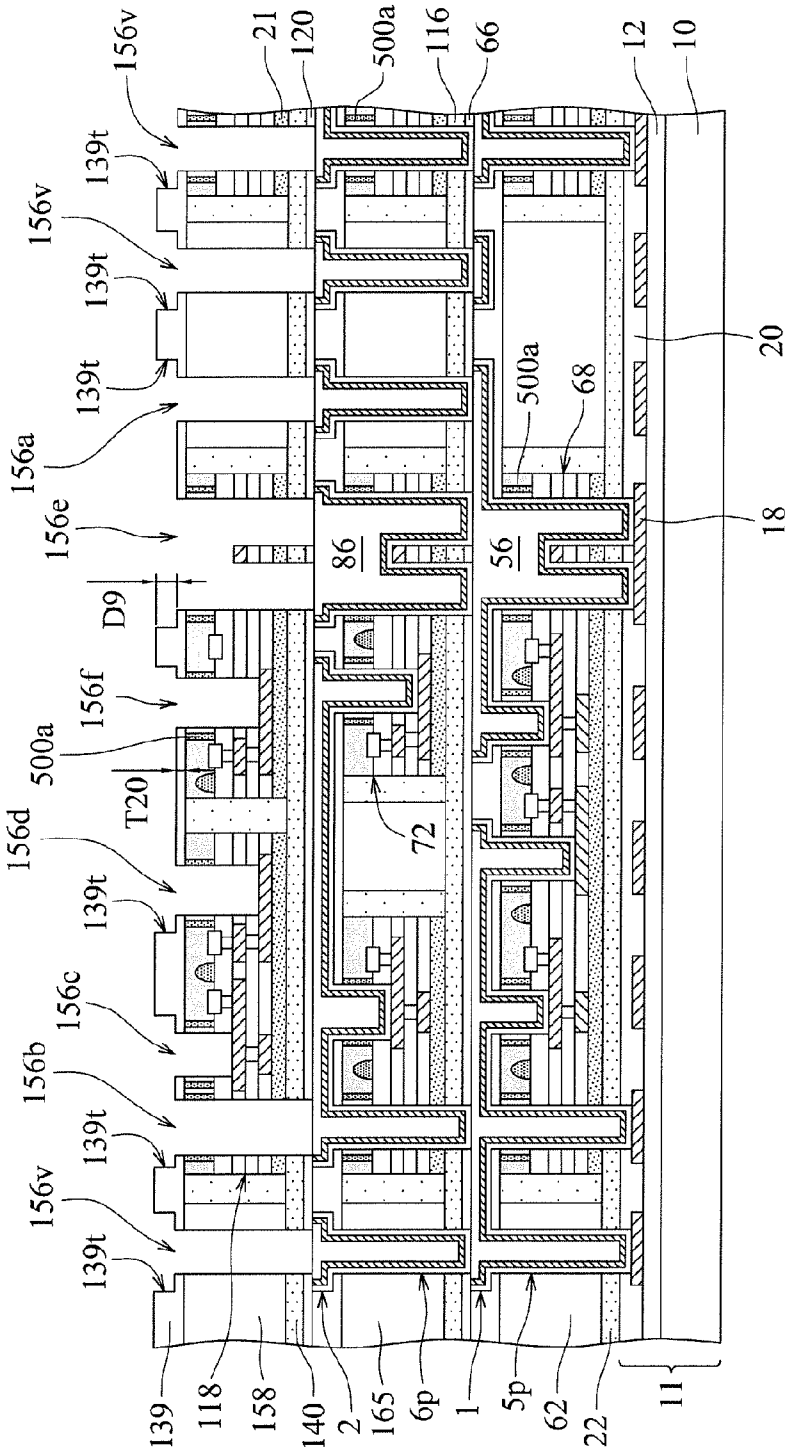

156v
21
120
500a
116
66
12
10
139t
156v
139t
156a
139t
500a
68
20
156e
86
56
18
D9
156f
500a
T20
72
156d
139t
156c
156b
139t
156v
139t
139
118
158
140
2
165
6p
1
5p
62
22
11

Fig. 178

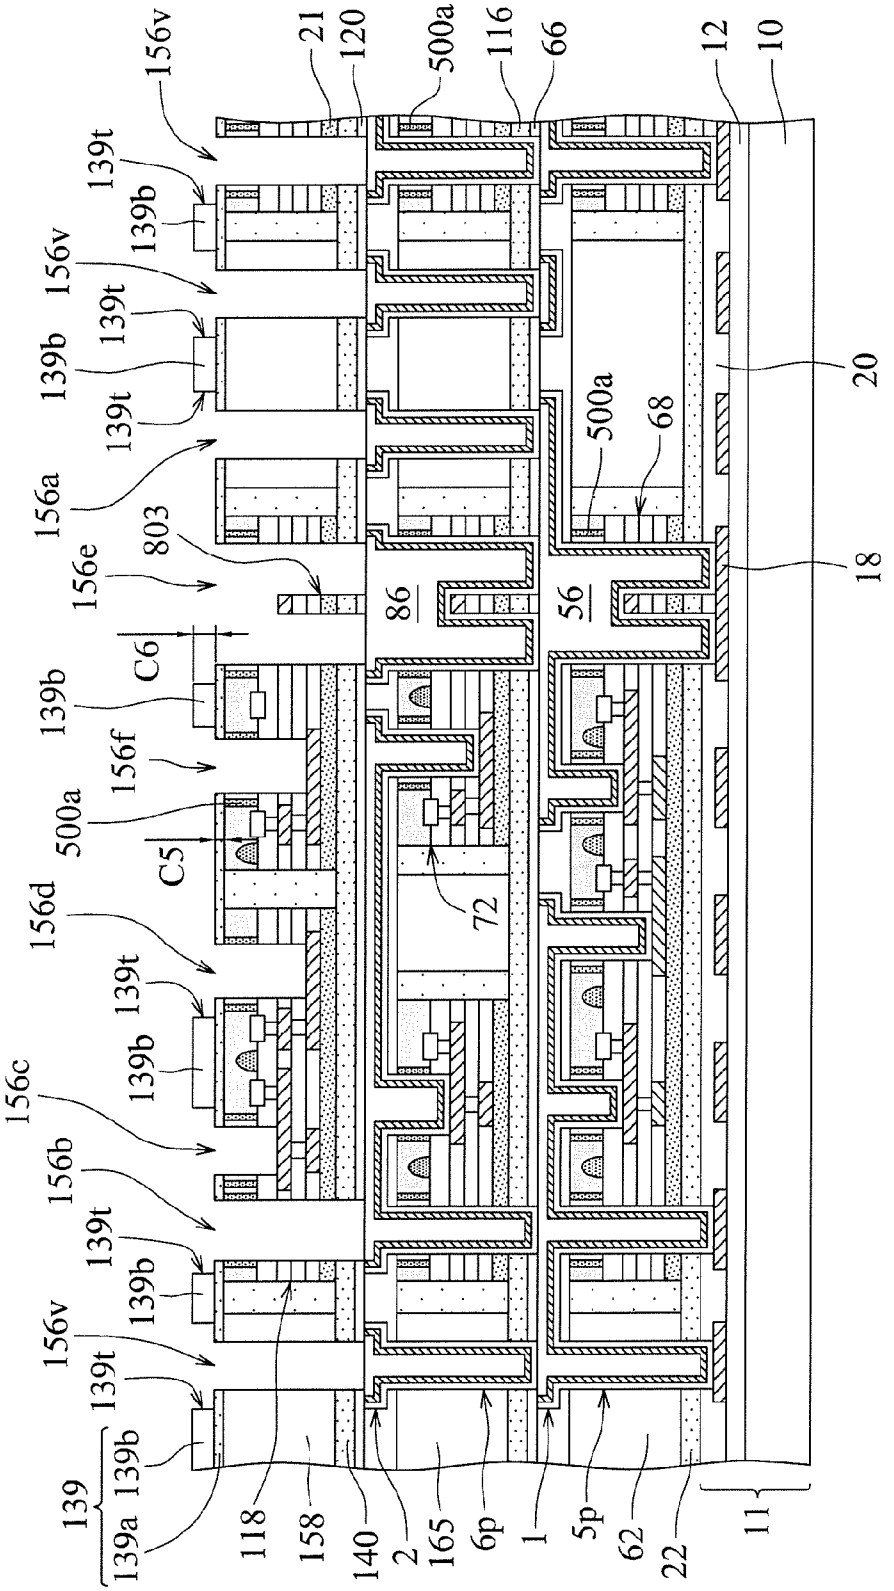

156v
21
120
500a
116
66
12
10
139t
139b
156v
139t
139b
139t
156a
803
156e
C6
139b
156f
500a
C5
156d
139t
139b
156c
156b
139t
139b
156v
139t
139b
139
139a
118
158
140
2
165
6p
1
5p
62
22
11
86
56
72
500a
68
20
18

Fig. 178A

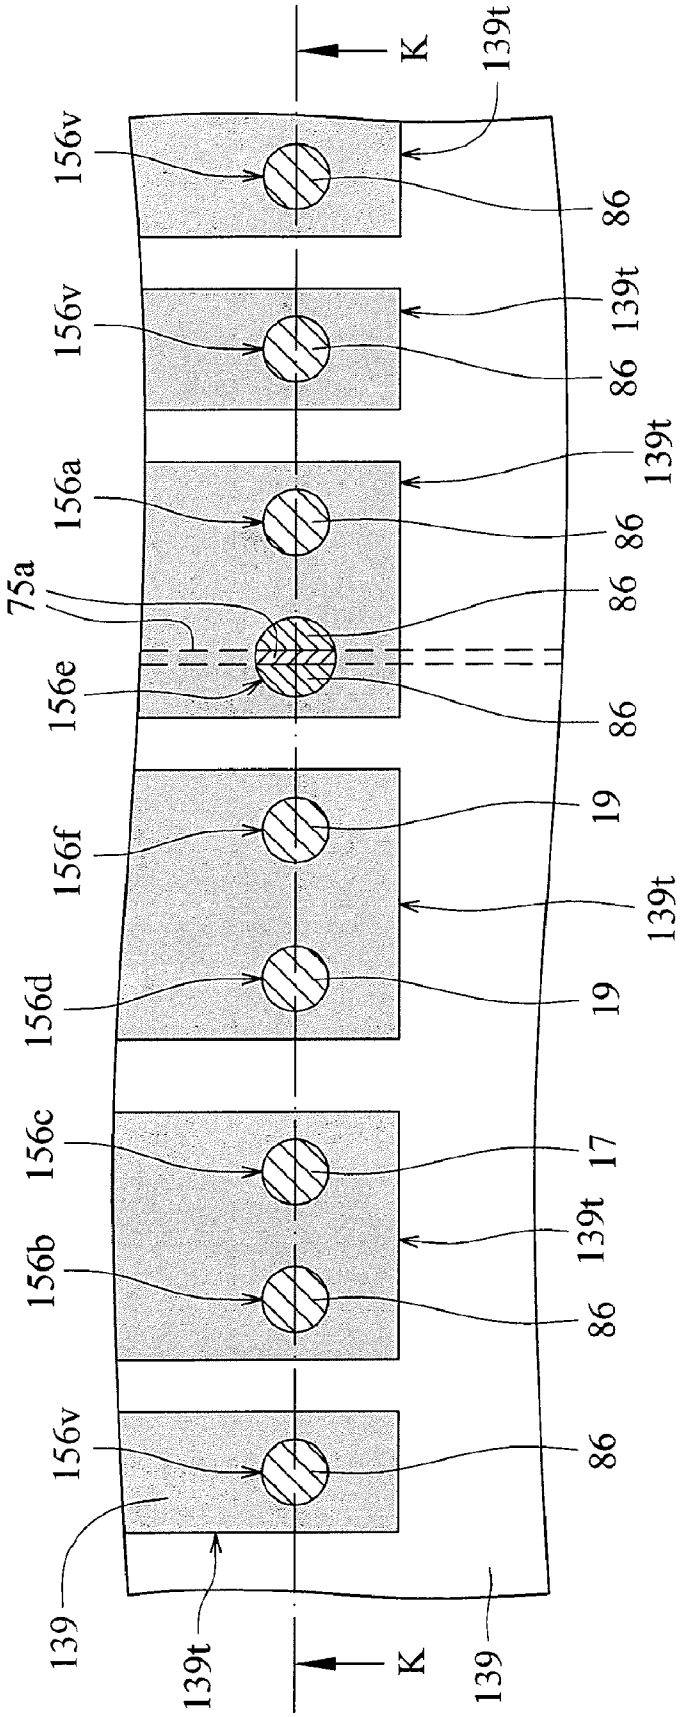

K
139t
156v
86
156v
139t
86
156a
139t
86
75a
86
156e
86
156f
19
139t
156d
19
156c
17
139t
156b
86
156v
86
139
139t
K
139

Fig. 179

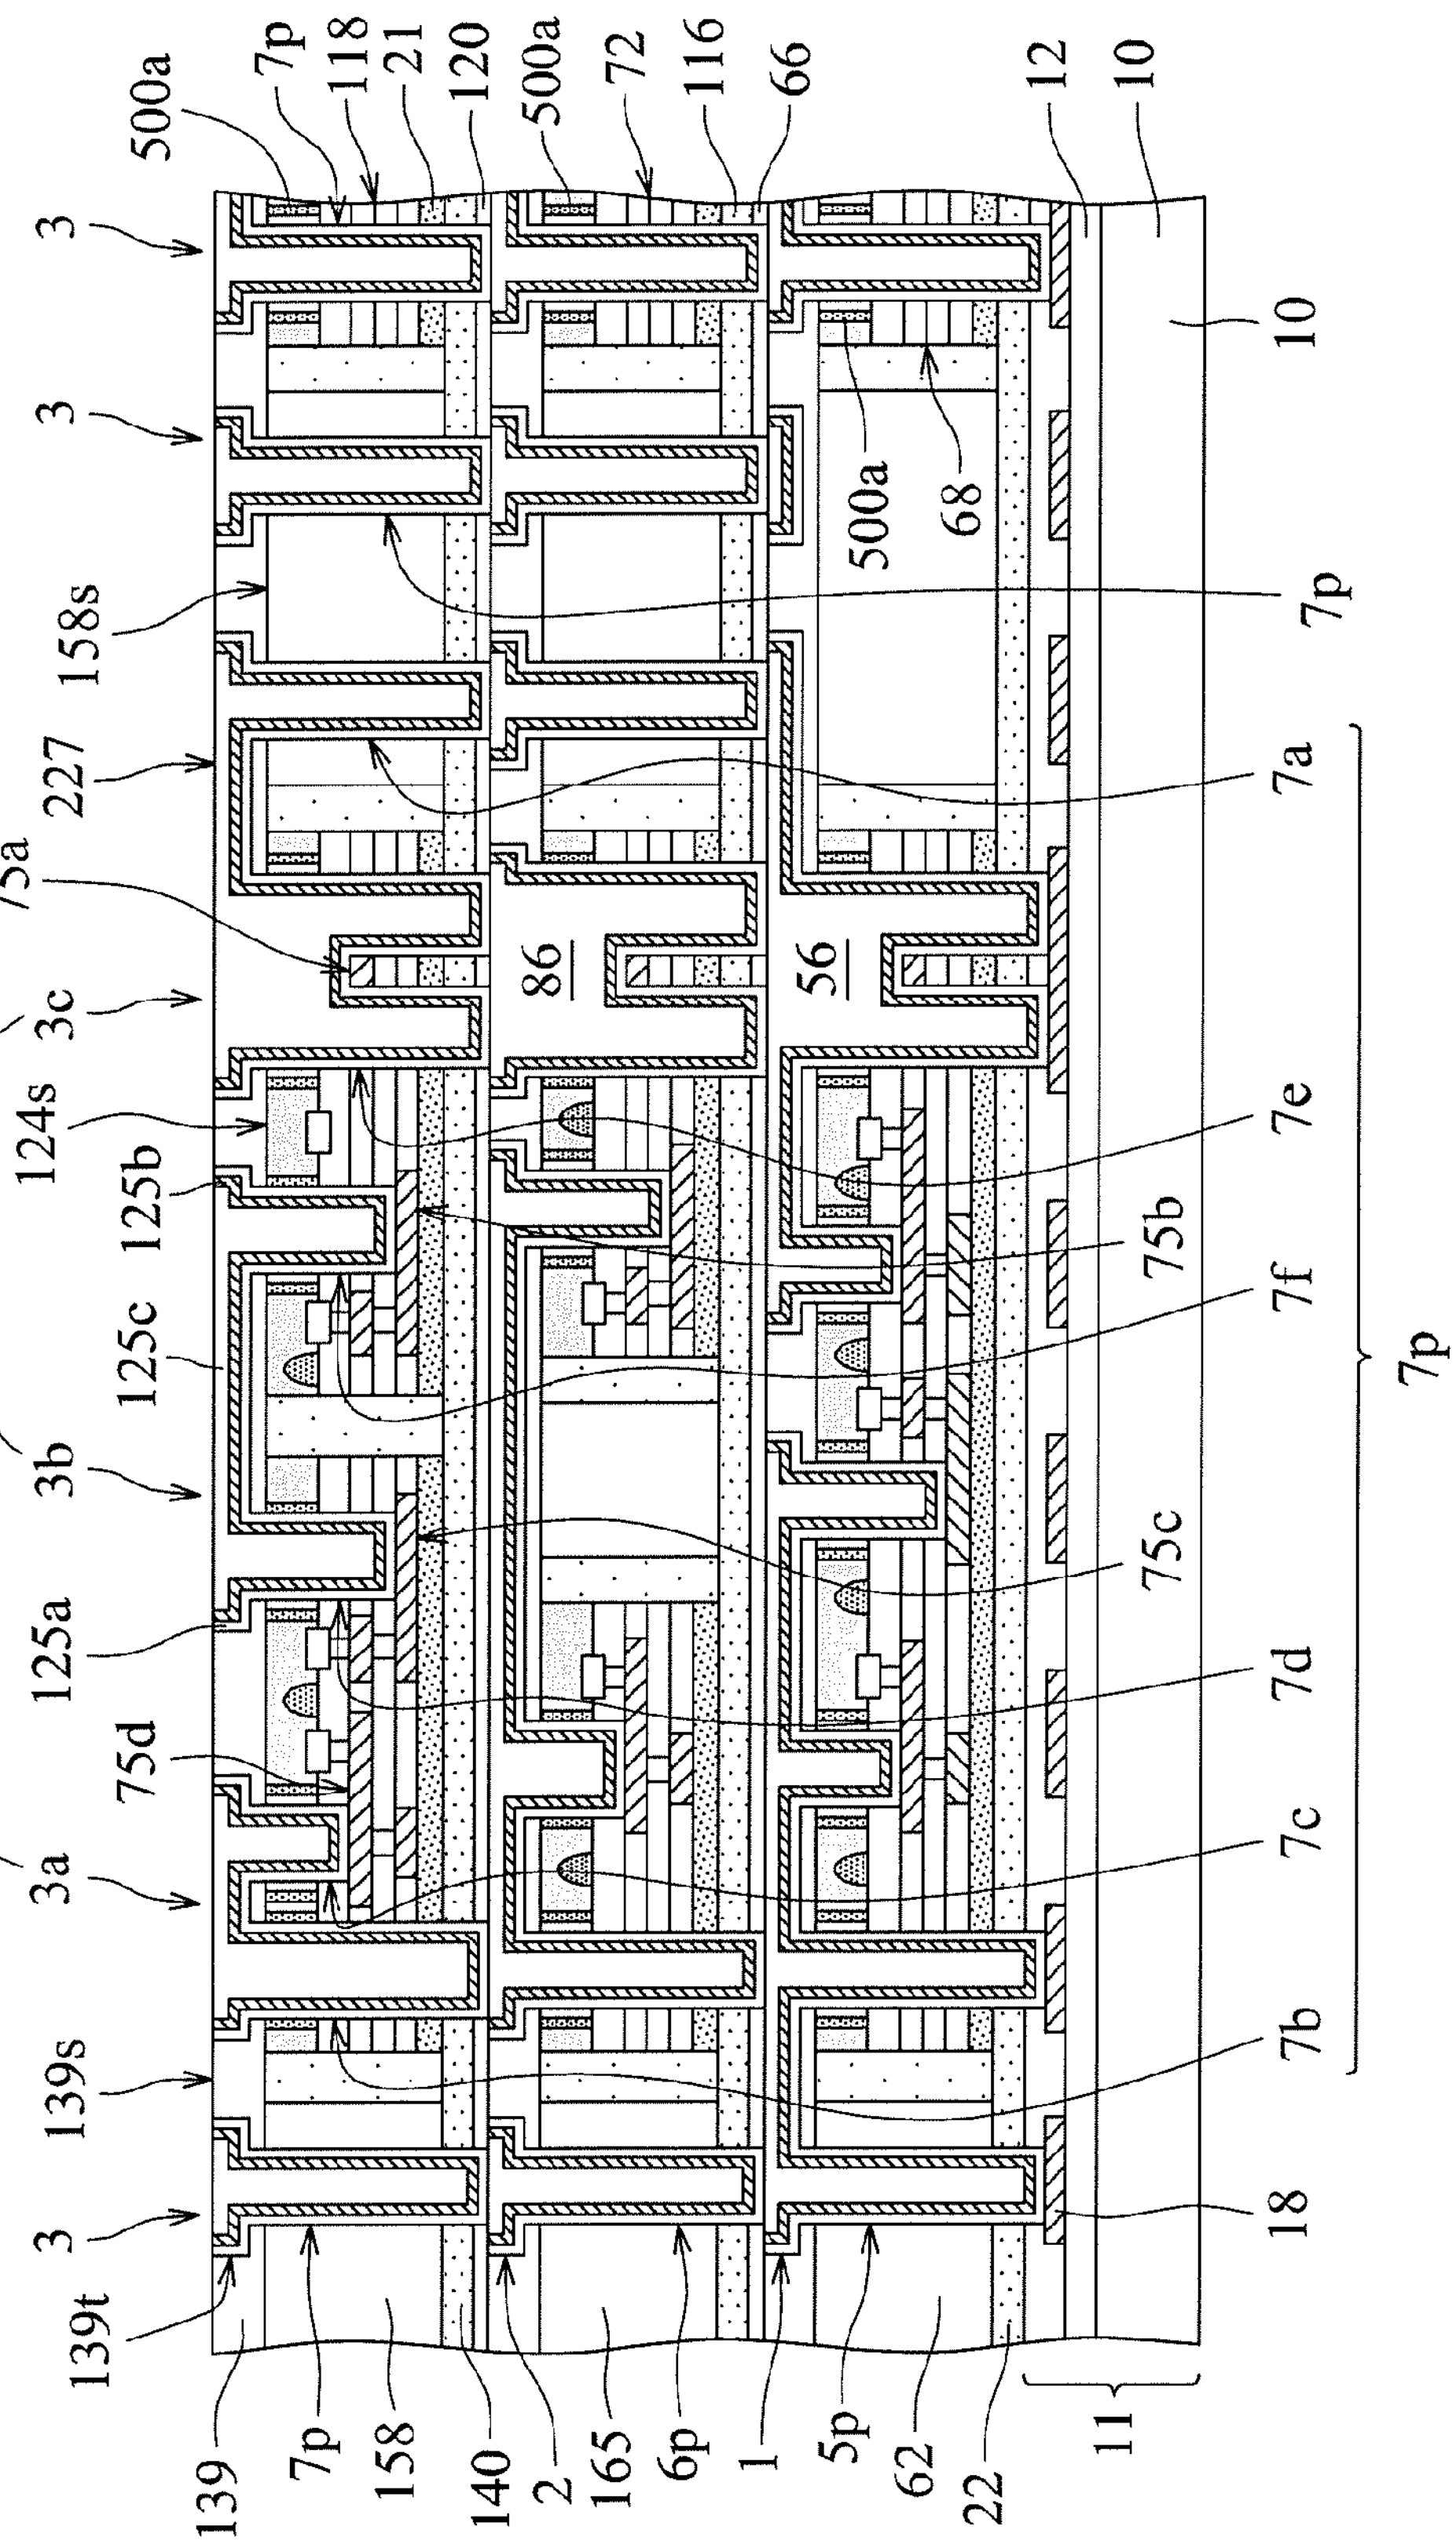

500a
7p
118
21
120
500a
72
116
66
12
10
3
3
158s
227
75a
3c
124s
125b
125c
3b
125a
75d
3a
139s
3
139t
3
10
500a
68
7p
7a
86
56
7e
75b
7f
7p
75c
7d
7c
7b
18
139
7p
158
140
2
165
6p
1
5p
62
22
11

Fig. 180

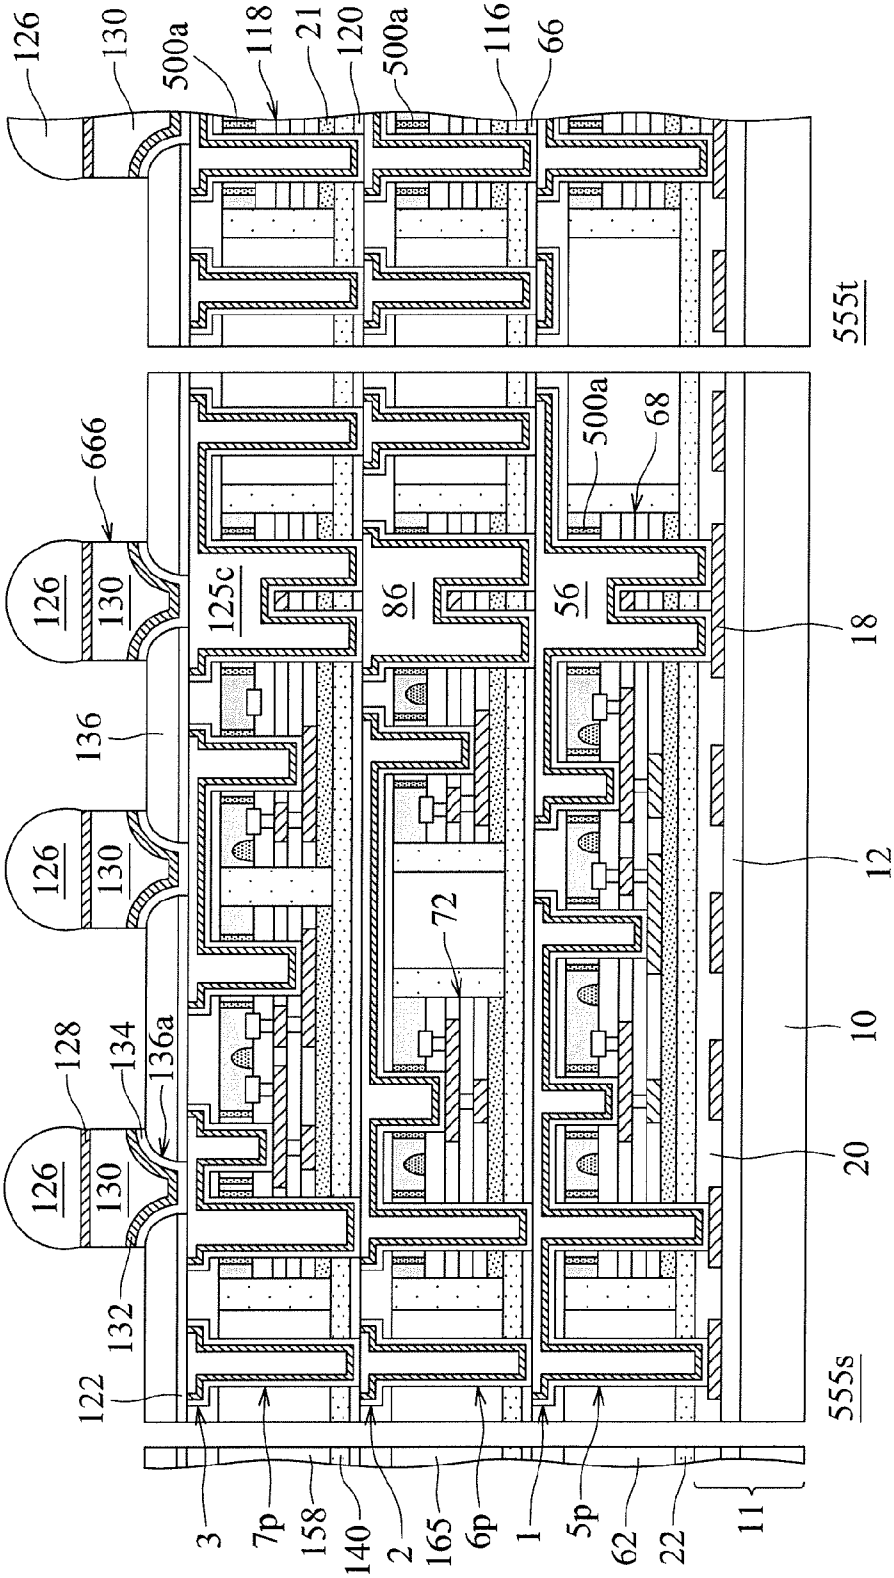

126
130
500a
118
21
120
500a
116
66
555t
666
68
125c
86
56
18
136
12
72
128
134
136a
10
20
132
122
555s
3
7p
158
140
2
165
6p
1
5p
62
22
11

Fig. 181

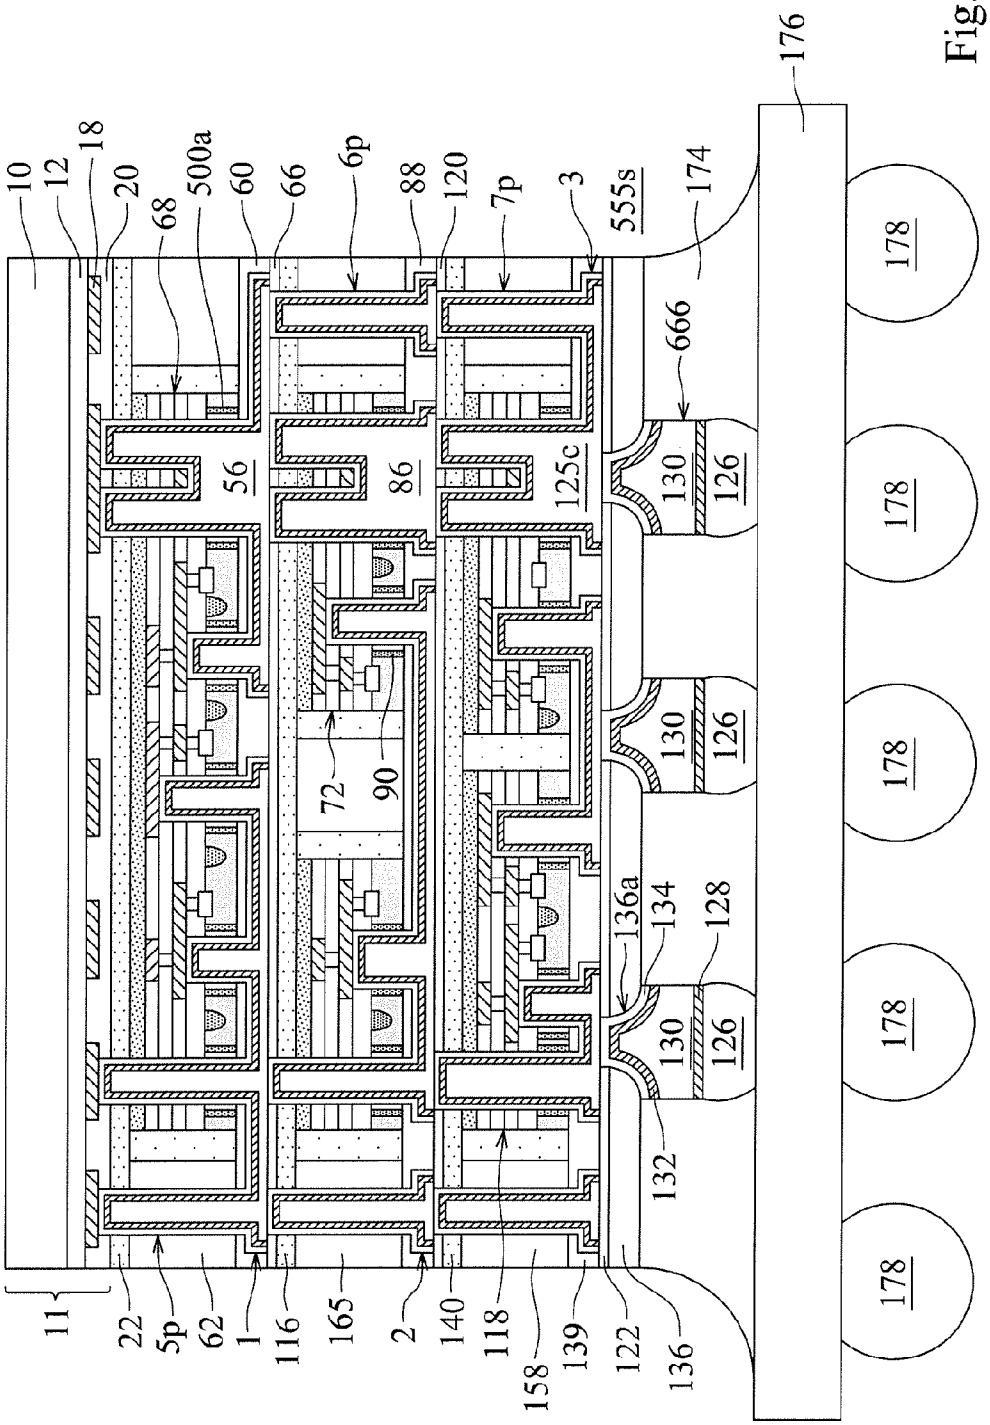

10
12
18
20
68
500a
60
66
6p
88
120
7p
3
555s
174
176
666
178
56
86
125c
130
126
72
90
136a
134
128
132
11
22
5p
62
1
116
165
2
140
118
158
139
122
136

Fig. 182

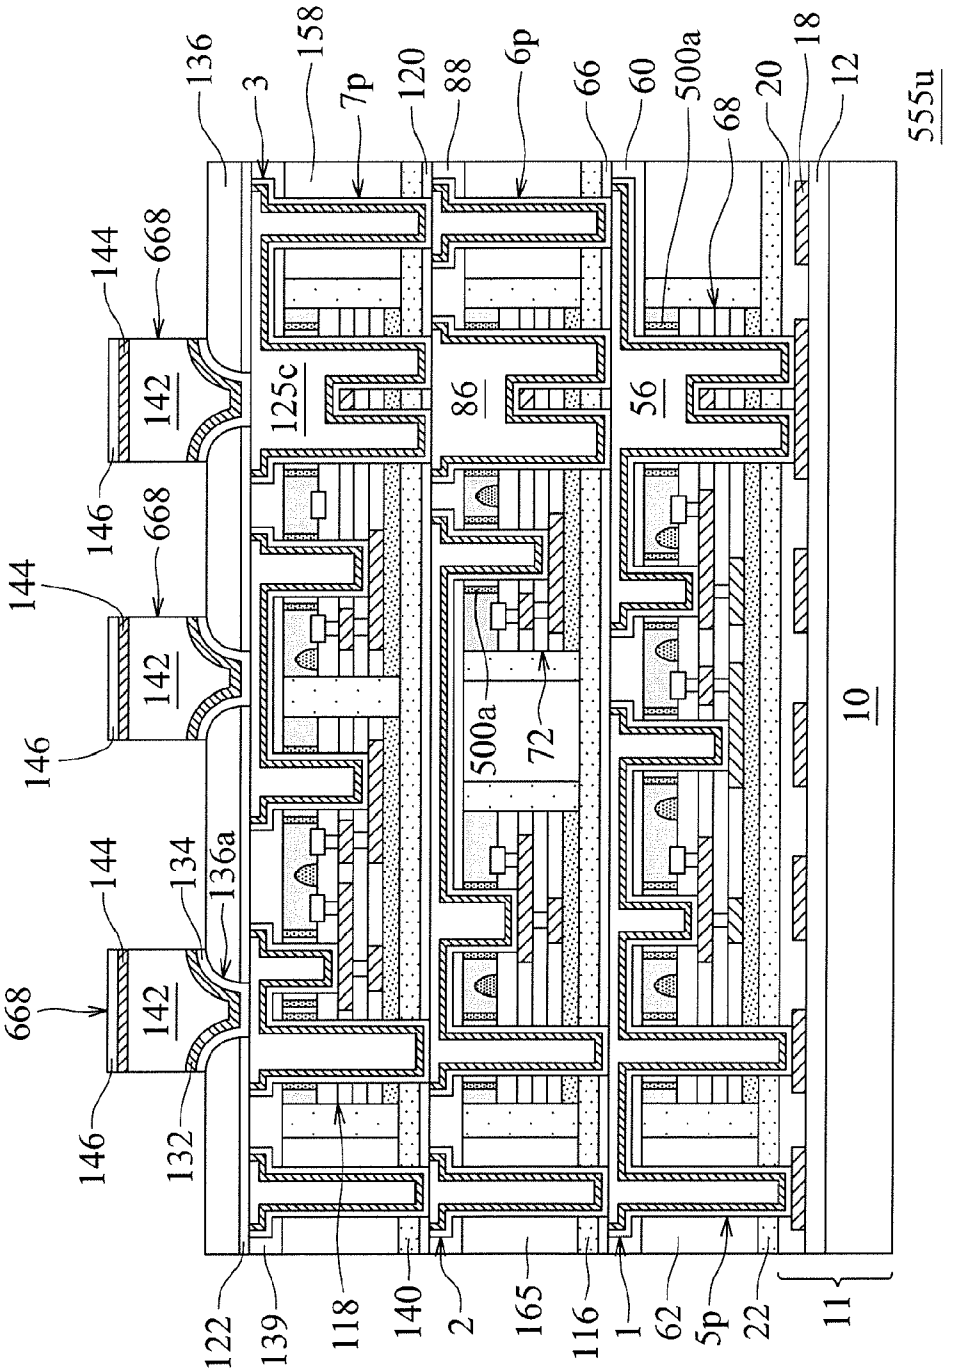

136
3
158
7p
120
88
6p
66
60
500a
68
20
18
12
555u
144
668
142
125c
86
56
146
668
144
142
146
500a
72
10
144
134
136a
668
142
146
132
122
139
118
140
2
165
116
1
62
5p
22
11

Fig. 183

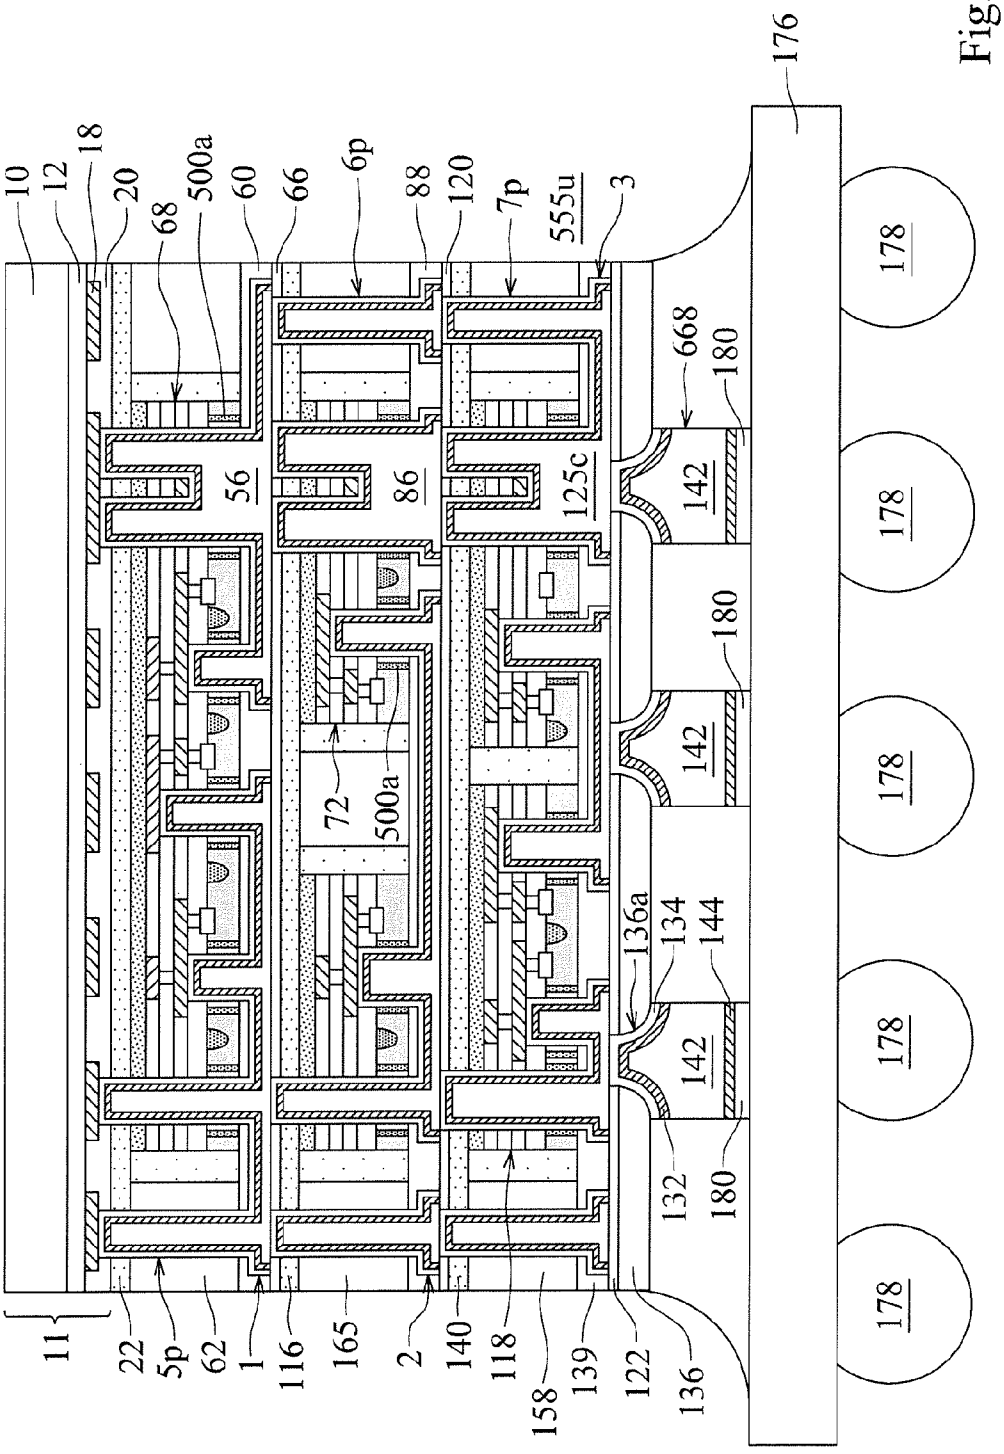

10
12
18
20
68
500a
60
66
6p
88
120
7p
555u
3
176
668
180
178
56
86
125c
142
72
500a
136a
134
144
132
22
5p
62
1
116
165
2
140
118
158
139
122
136
11

Fig. 184

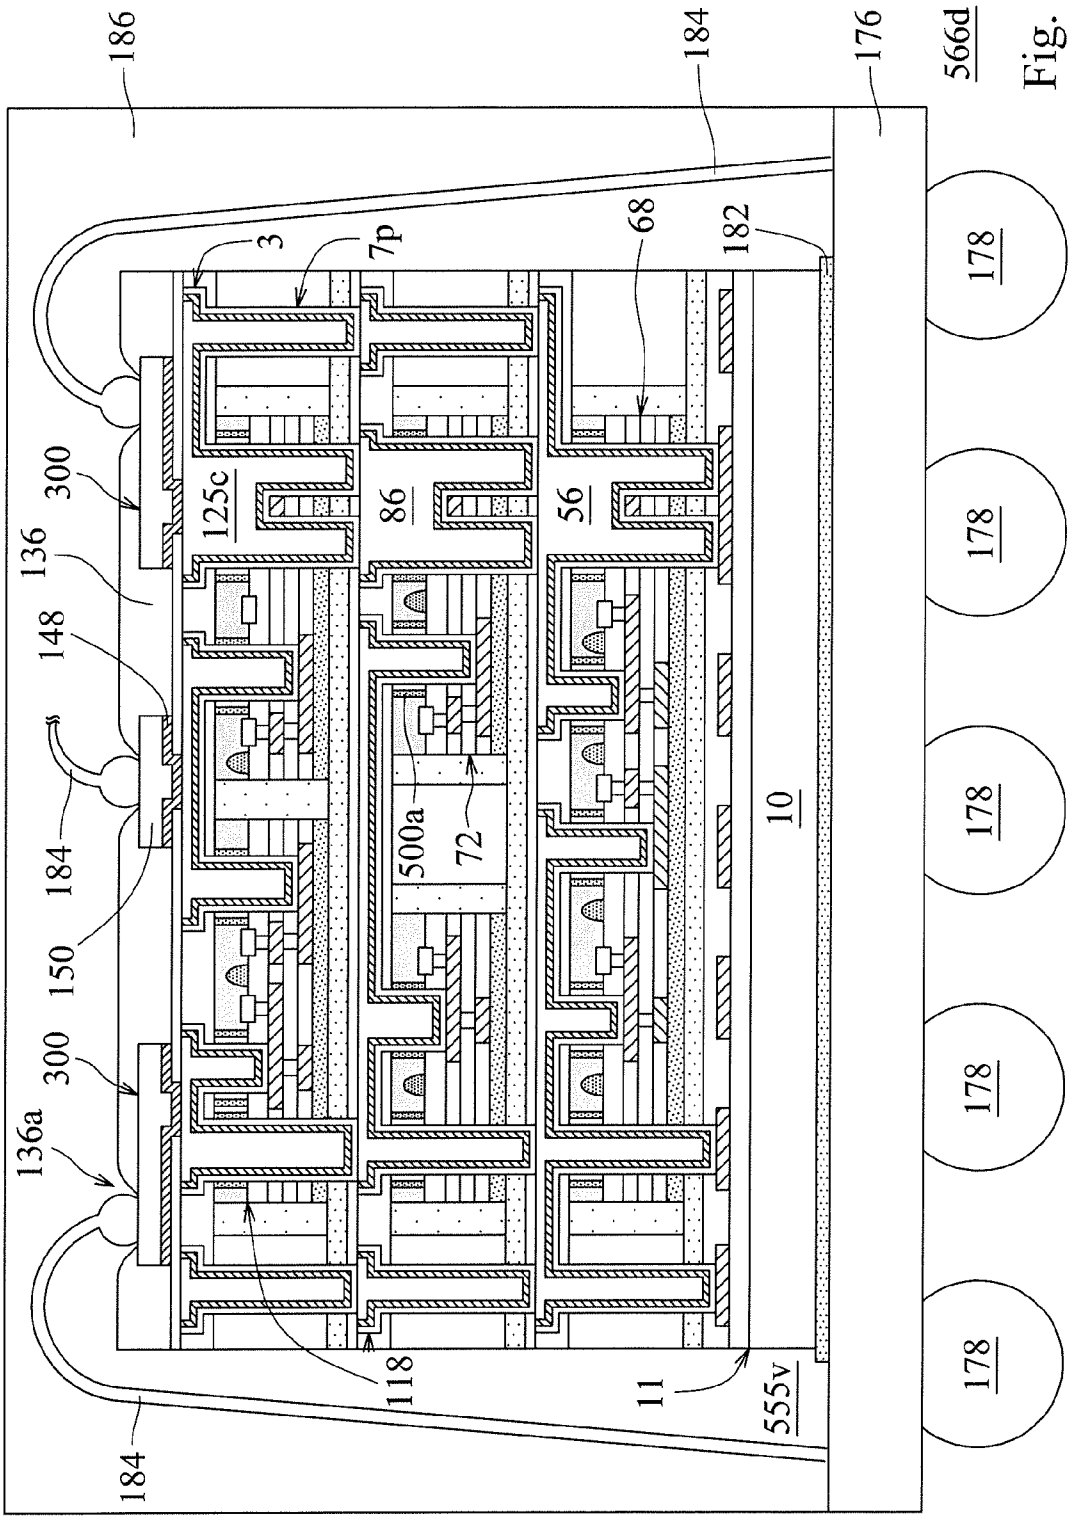

186
184
176
566d
3
7p
68
182
178
300
125c
86
56
136
148
184
150
500a
72
10
300
136a
118
11
555v
184

Fig. 185

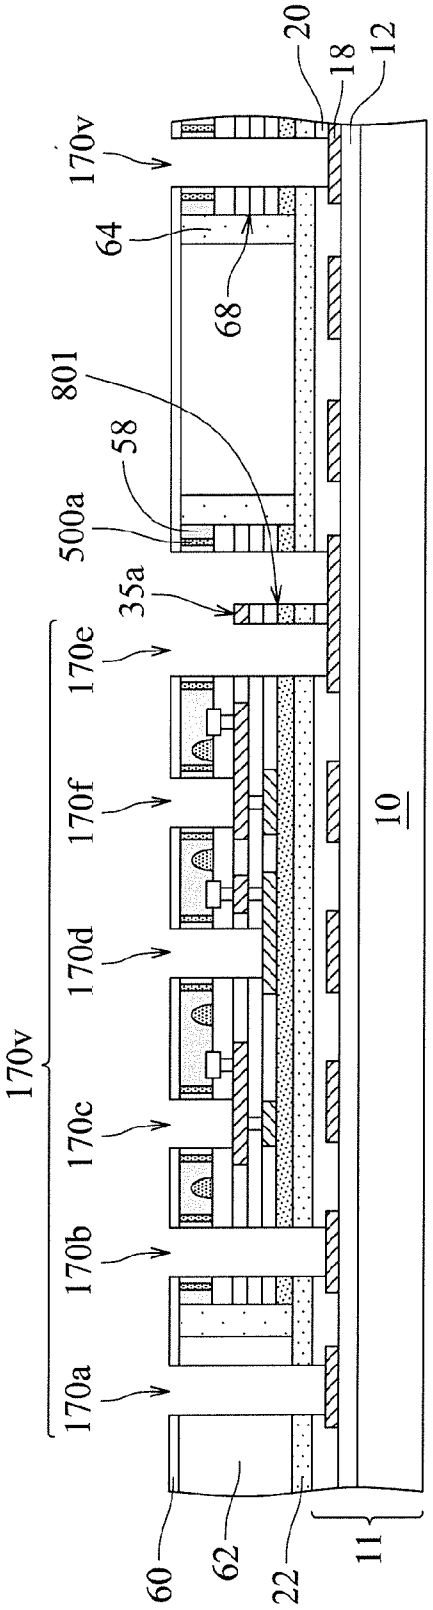


Fig. 186

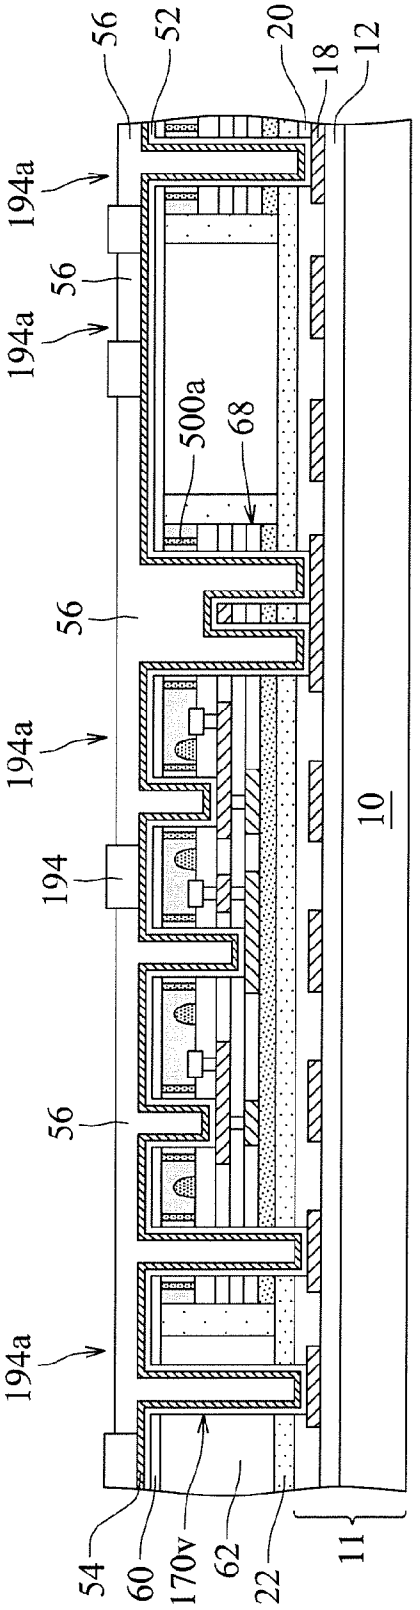


Fig. 187

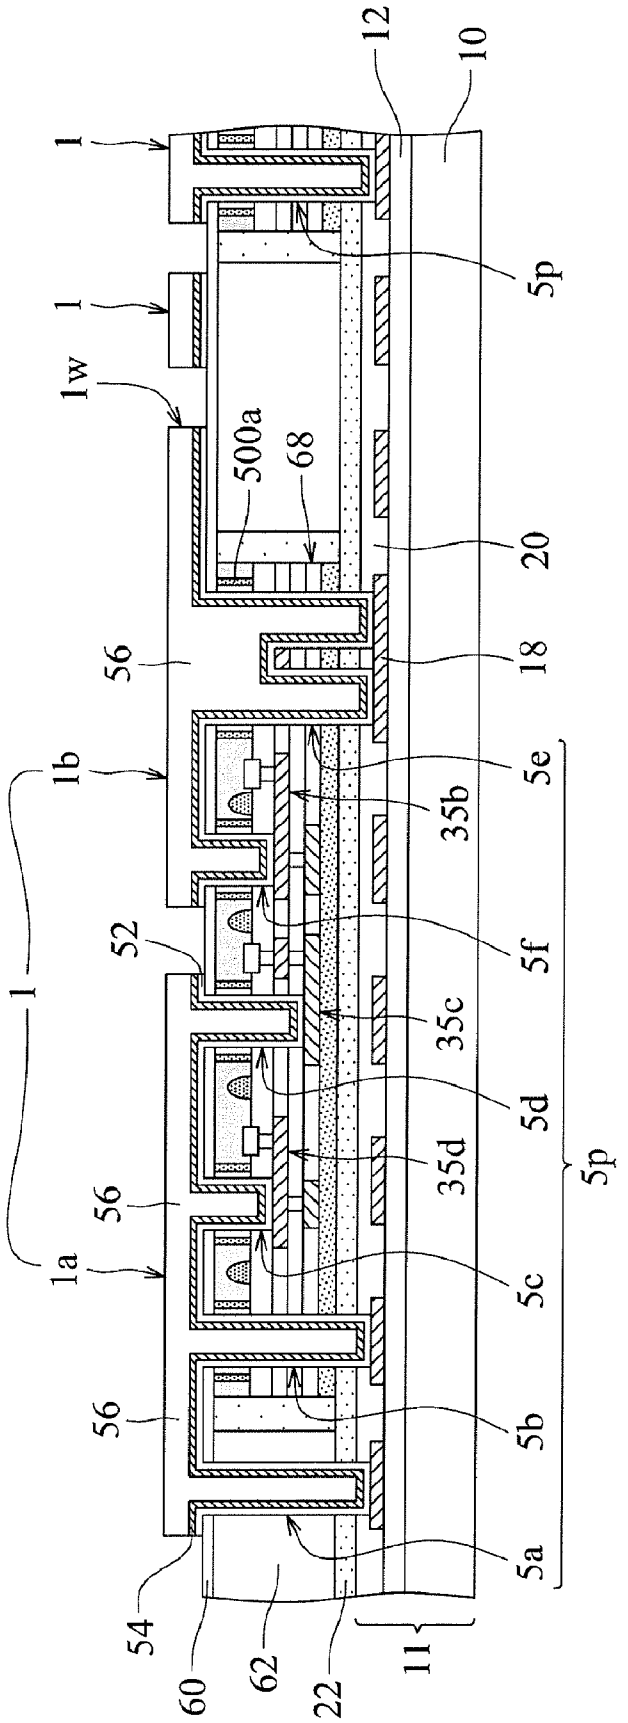

12
10
1
5p
1
1w
500a
68
20
56
18
1b
5e
35b
52
5f
1
35c
5d
35d
5p
56
1a
5c
56
5b
5a
54
60
62
22
11

Fig. 188

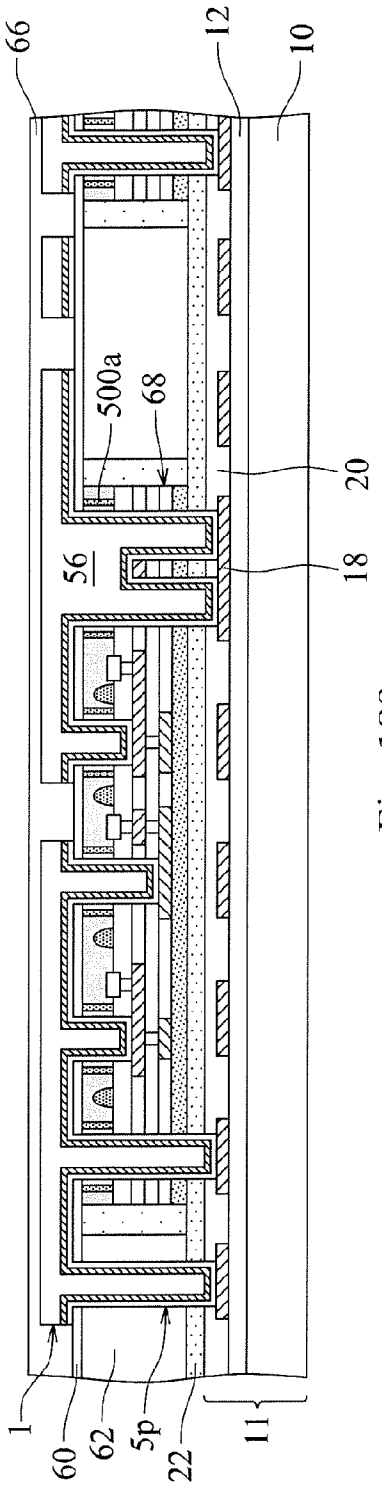


Fig. 189

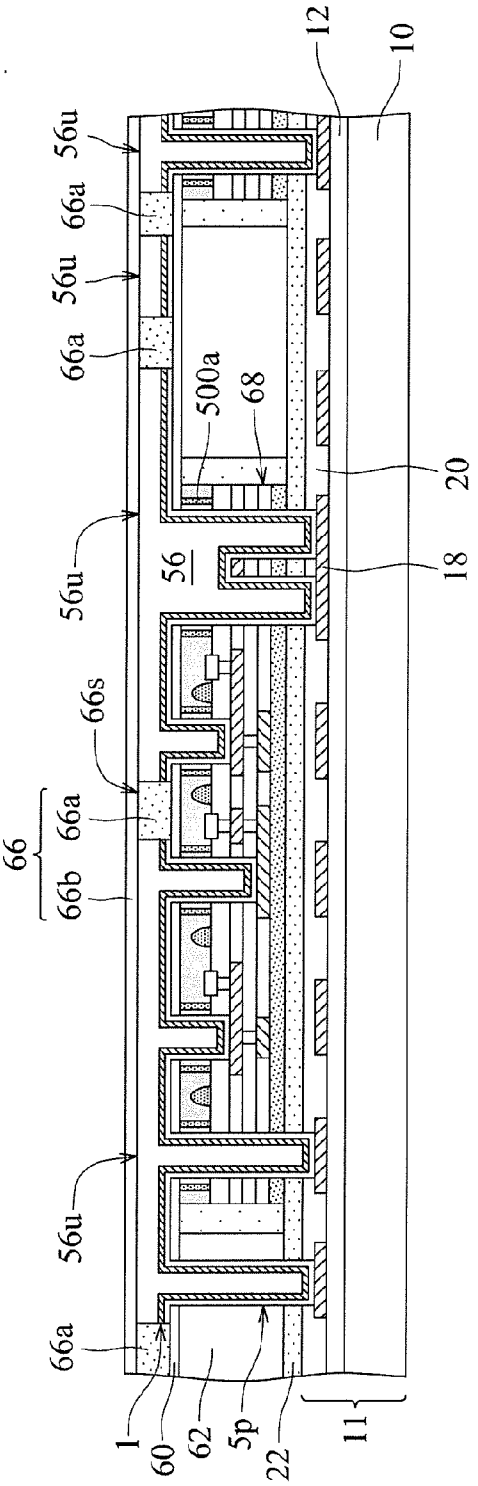


Fig. 190

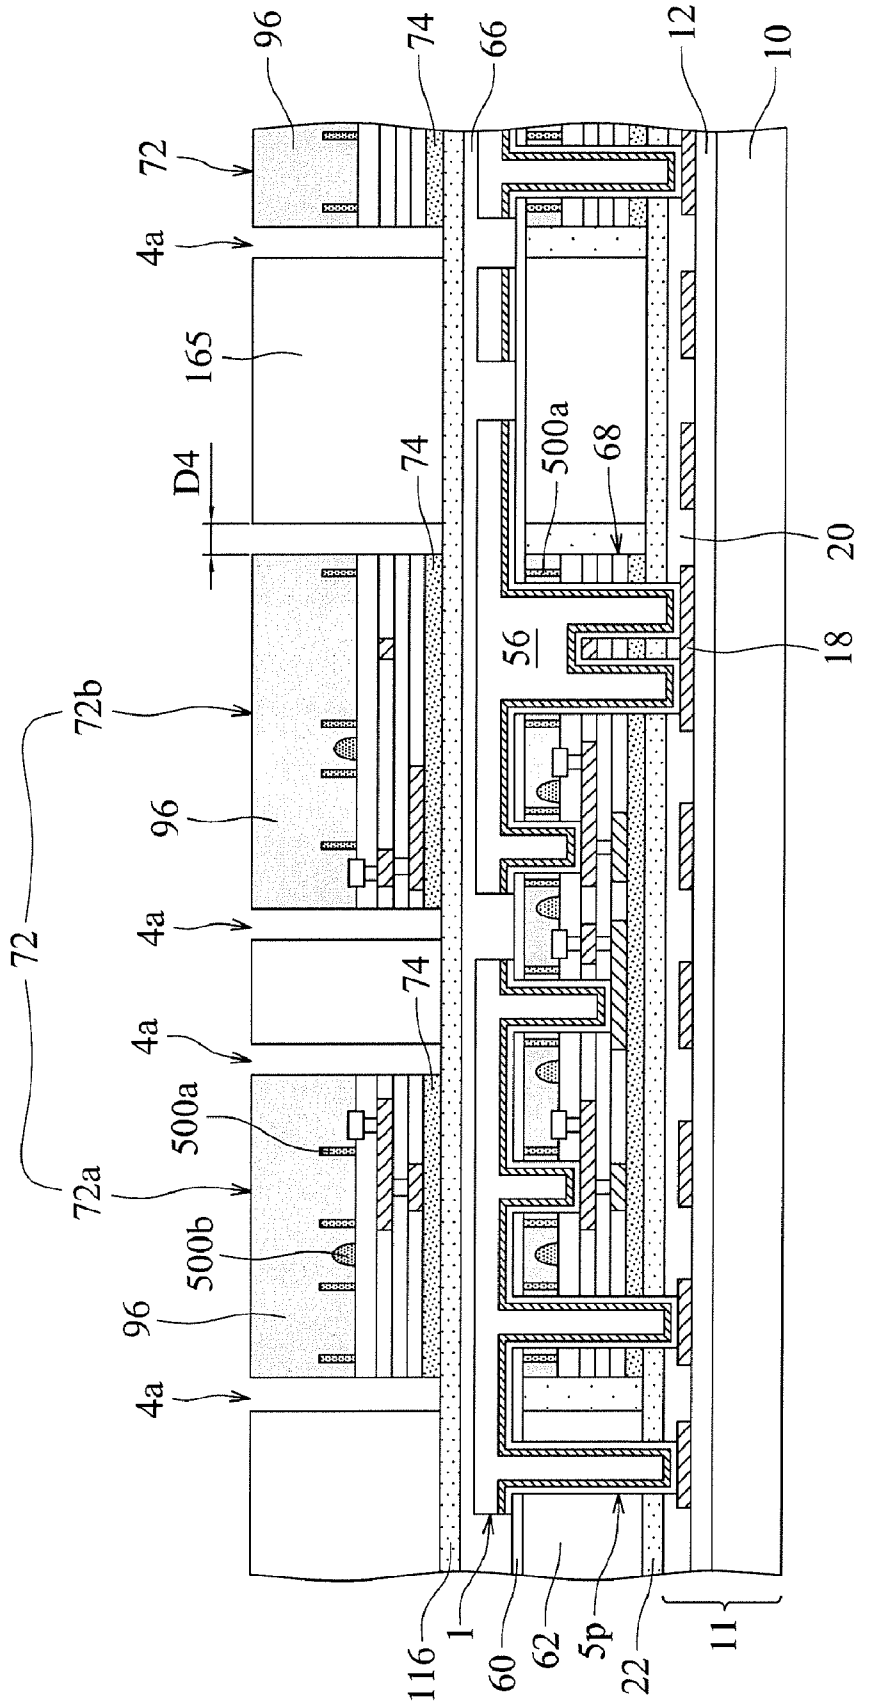

96
74
66
12
10
72
4a
165
D4
74
500a
68
20
56
18
72b
96
4a
72
74
4a
500a
72a
500b
96
4a
116
1
60
62
5p
22
11

Fig. 191

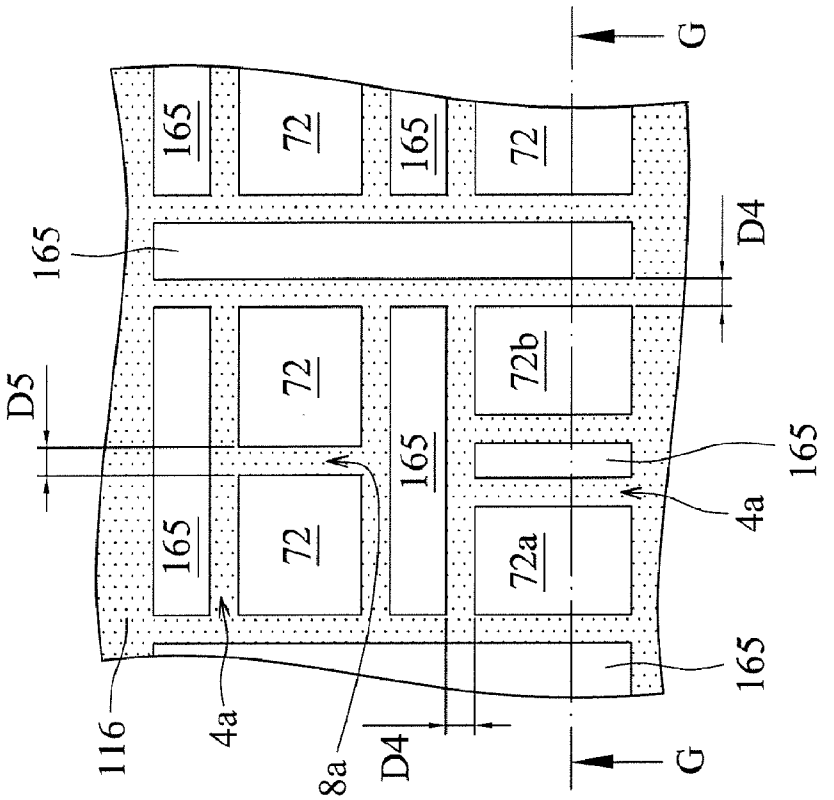


Fig. 193

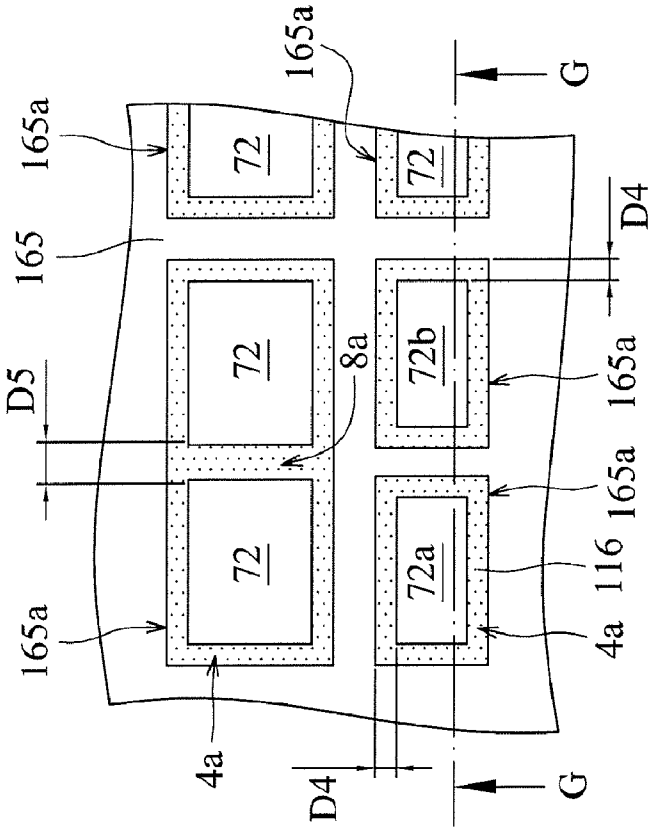


Fig. 192

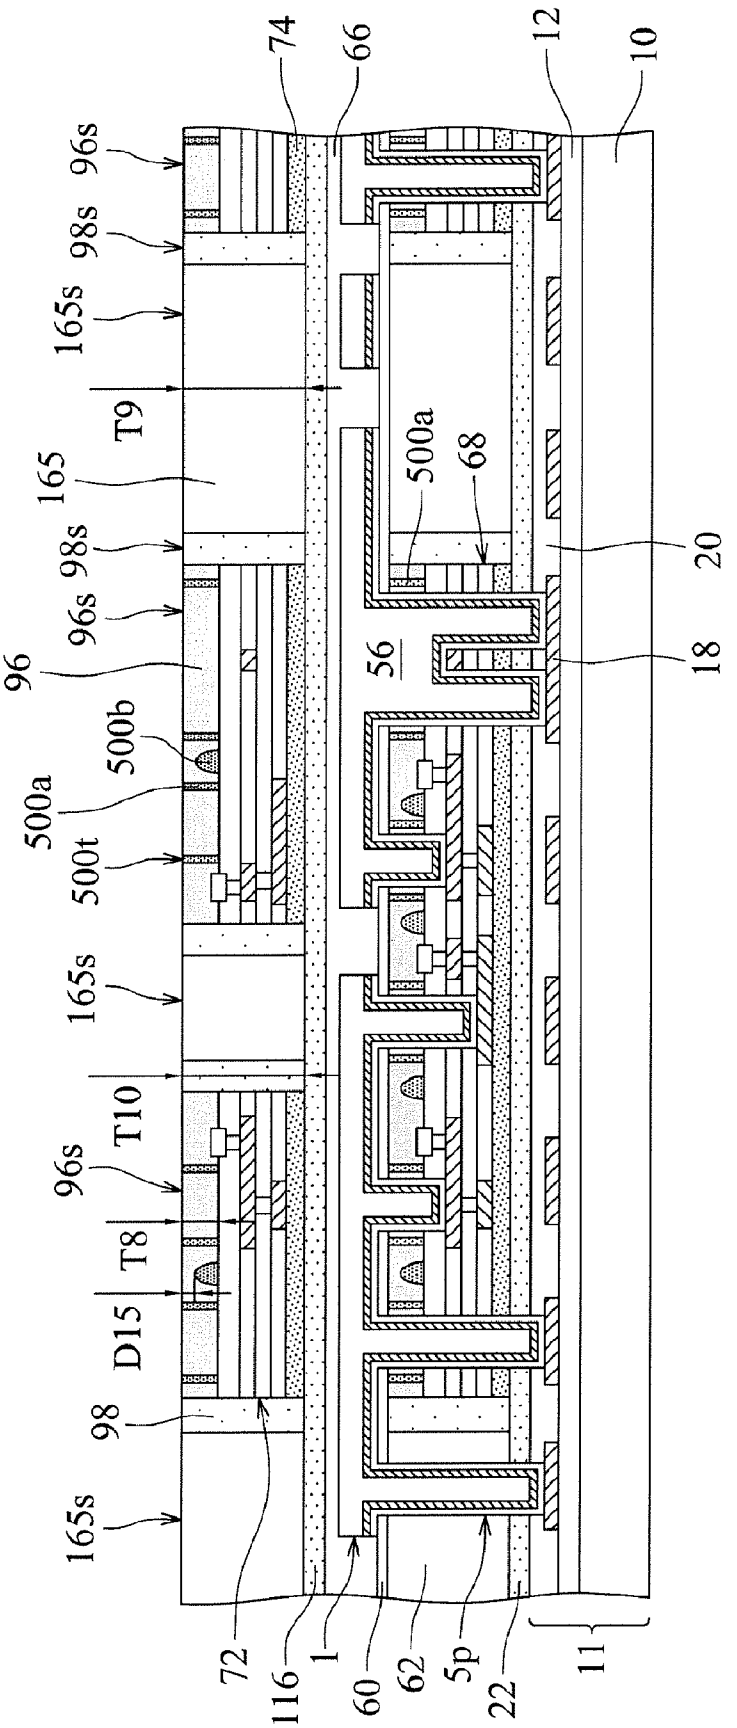

74
66
12
10
96s
98s
165s
T9
165
500a
68
98s
20
96s
96
56
18
500b
500a
500t
165s
T10
96s
T8
D15
98
165s
72
116
1
60
62
5p
22
11

Fig. 194

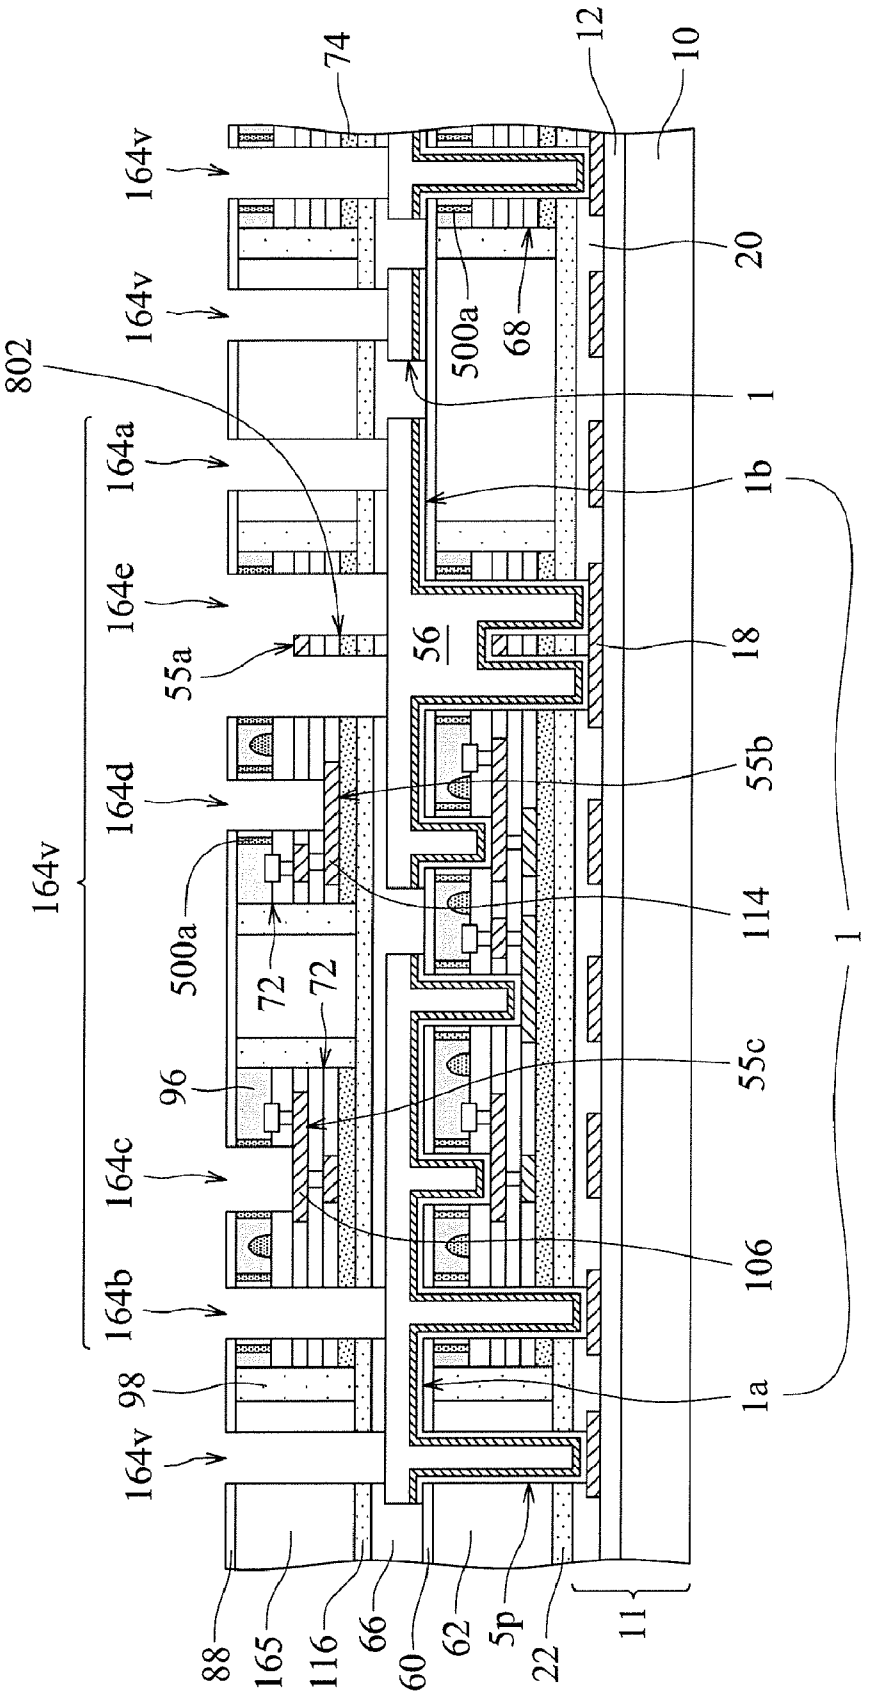

74
12
10
164v
164v
164v
802
164a
164e
55a
56
164d
164v
500a
72
72
96
164c
164b
98
164v
88
165
116
66
60
62
5p
22
11
20
500a
68
1
1b
18
55b
114
55c
106
1a
1

Fig. 195

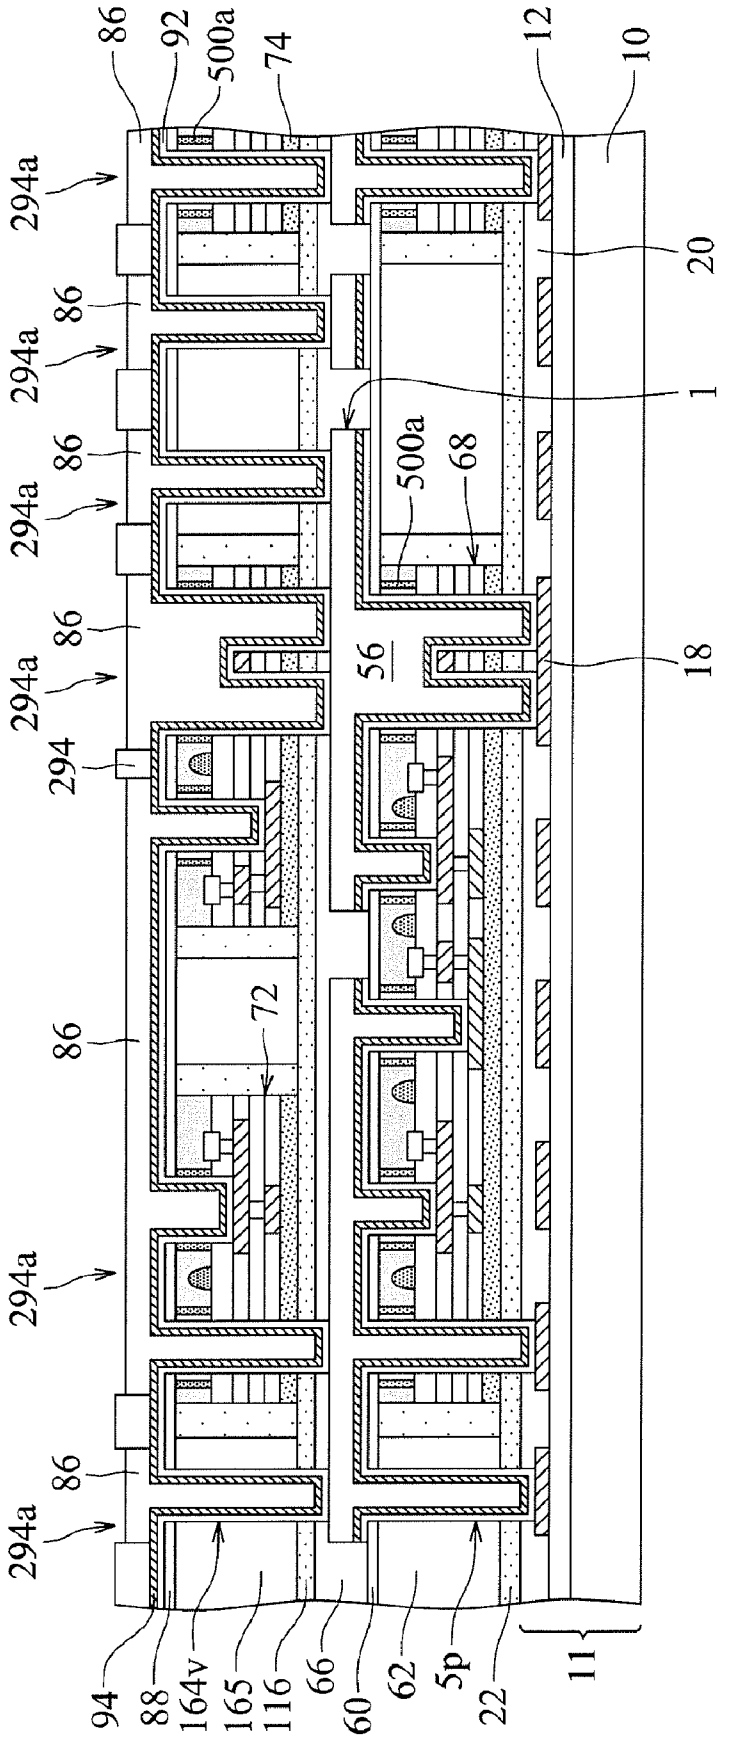

86
92
500a
74
12
10
294a
20
1
68
18
56
294
72
94
88
164v
165
116
66
60
62
5p
22
11

Fig. 196

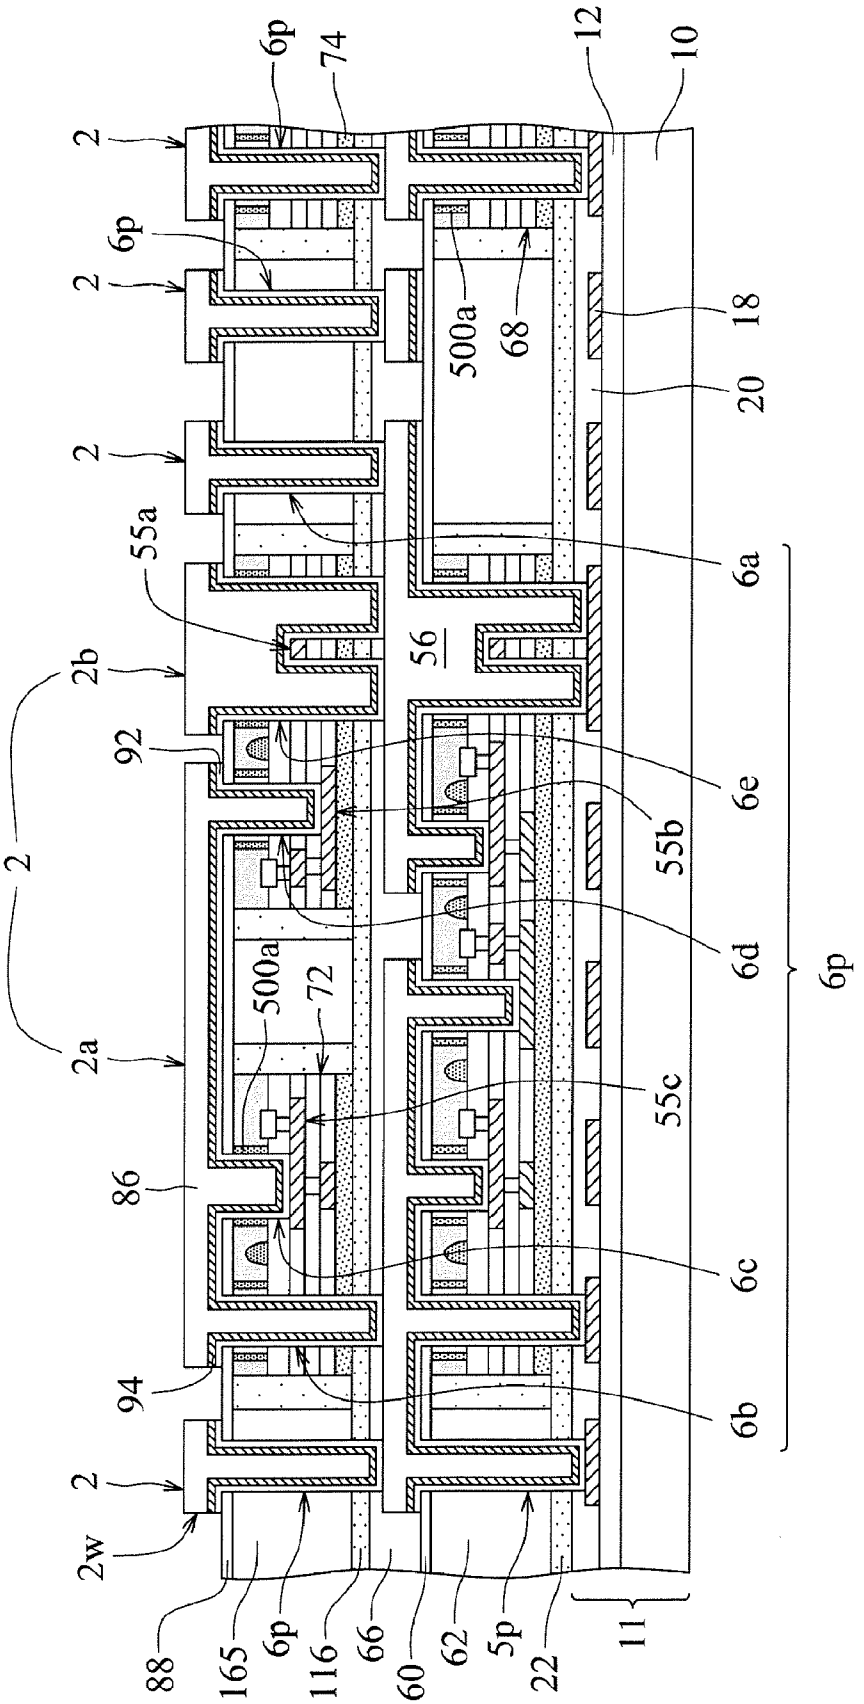

6p
74
12
10
2
6p
2
500a
68
18
20
2
55a
6a
56
2b
92
6e
55b
2
6d
6p
500a
72
2a
55c
86
6c
94
6b
2
2w
88
165
6p
116
66
60
62
5p
22
11

Fig. 197

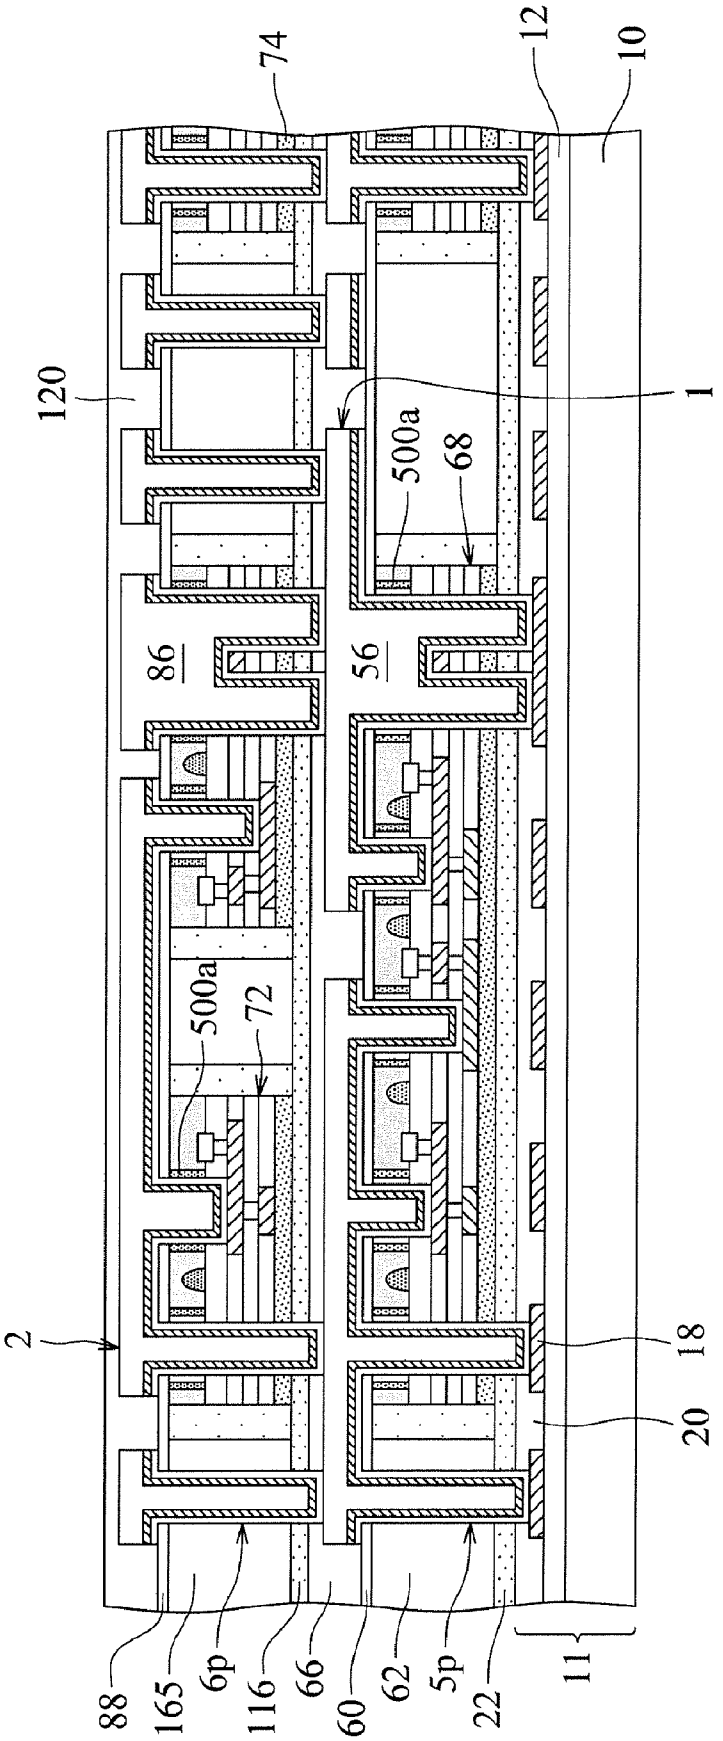

74
12
10
120
1
500a
68
86
56
500a
72
2
18
20
88
165
6p
116
66
60
62
5p
22
11

Fig. 198

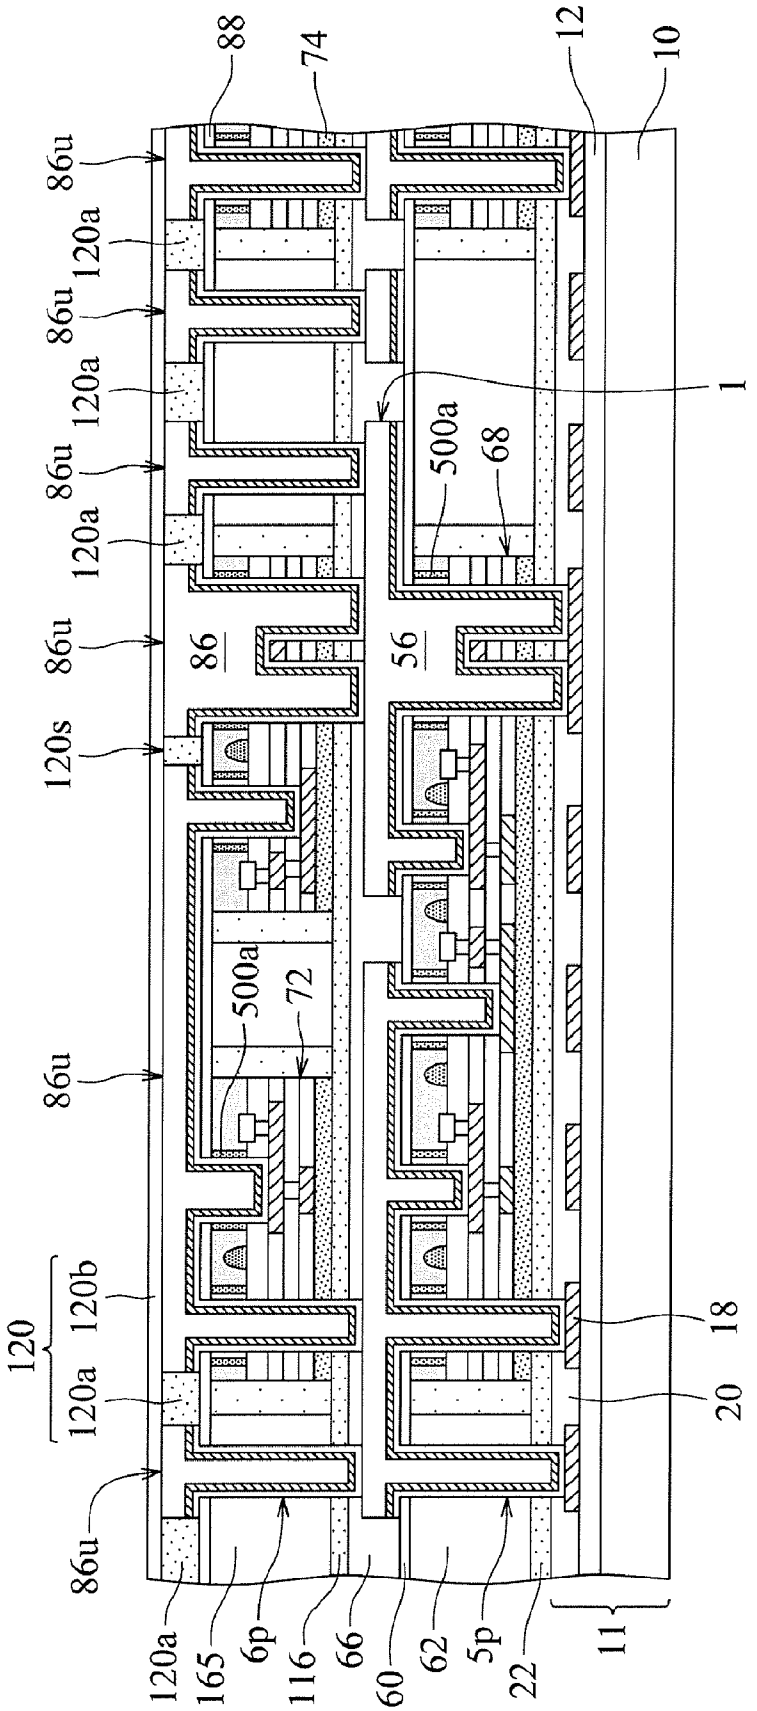

88
74
12
10
86u
120a
1
500a
68
86
56
120s
72
120b
120
18
20
165
6p
116
66
60
62
5p
22
11

Fig. 199

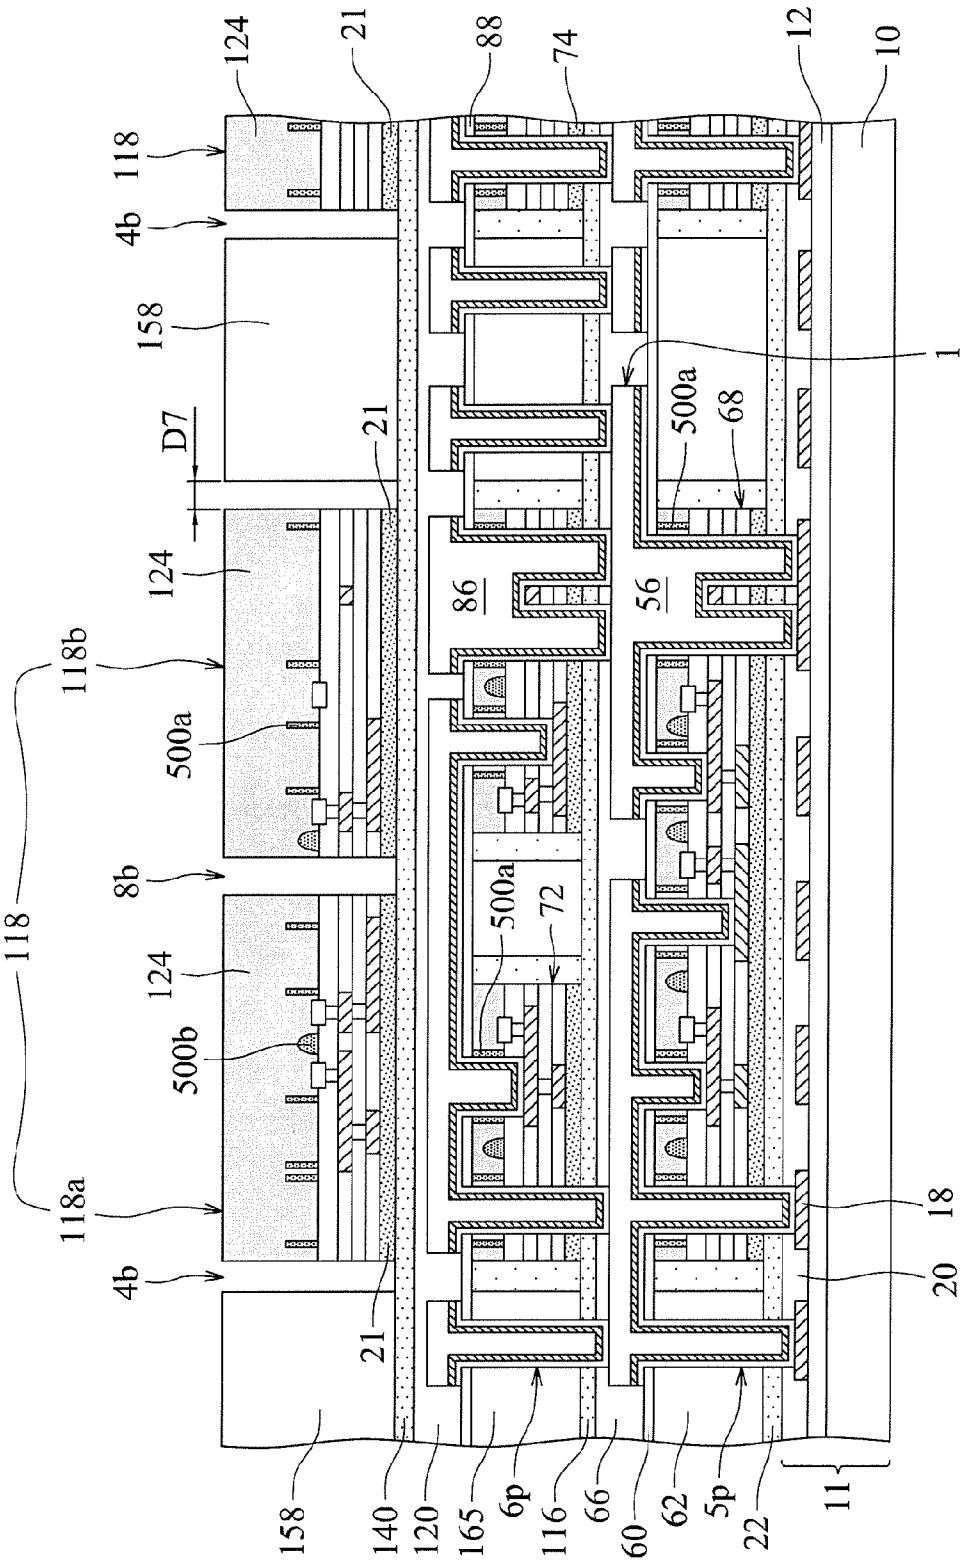

124
21
88
74
12
10
118
4b
158
1
D7
21
500a
68
124
86
56
118b
500a
8b
500a
72
118
124
500b
118a
18
4b
20
21
158
140
120
165
6p
116
66
60
62
5p
22
11

Fig. 200

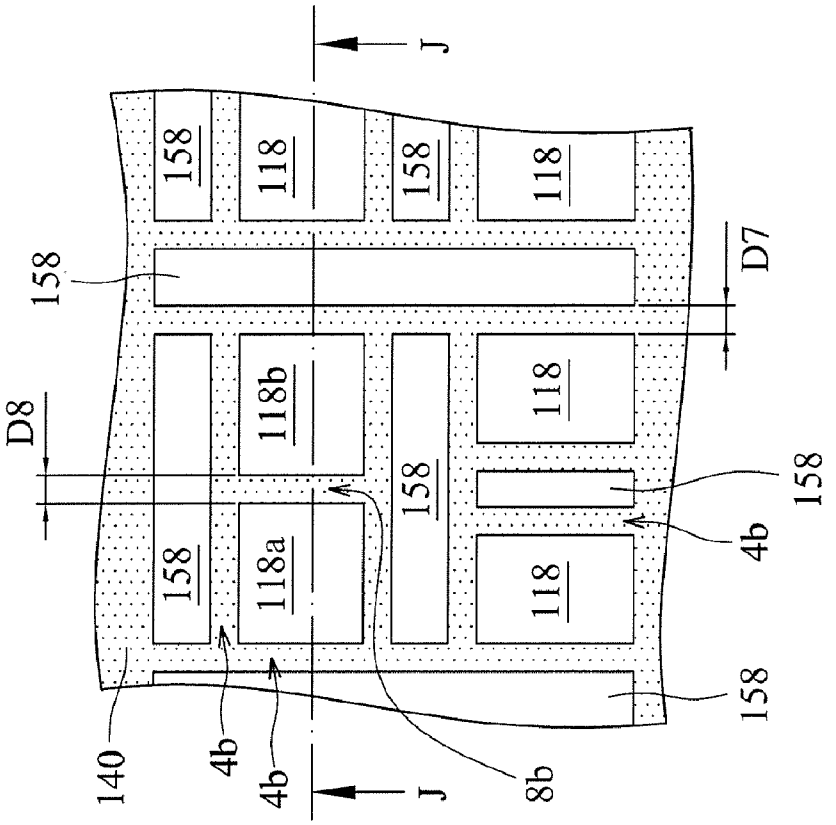


Fig. 202

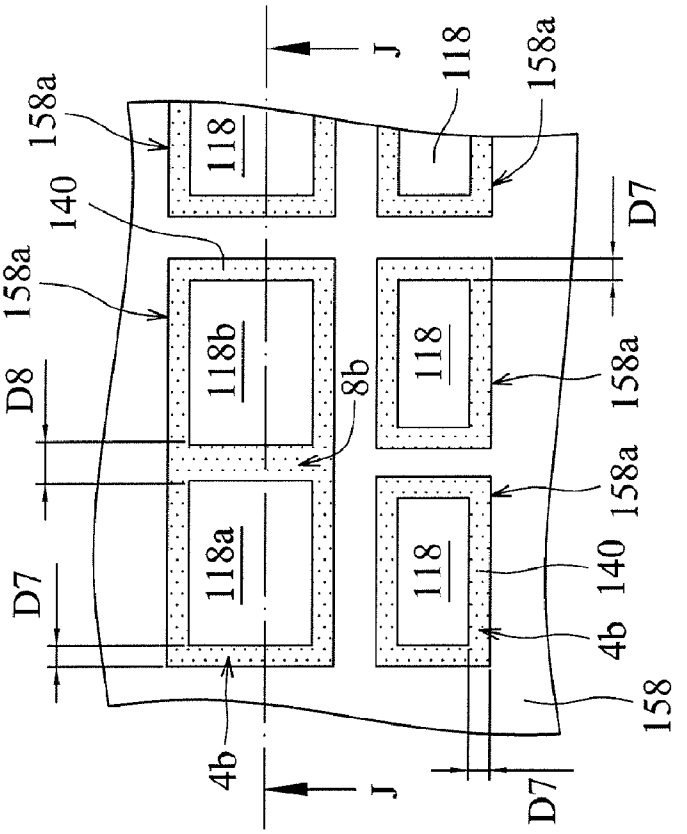


Fig. 201

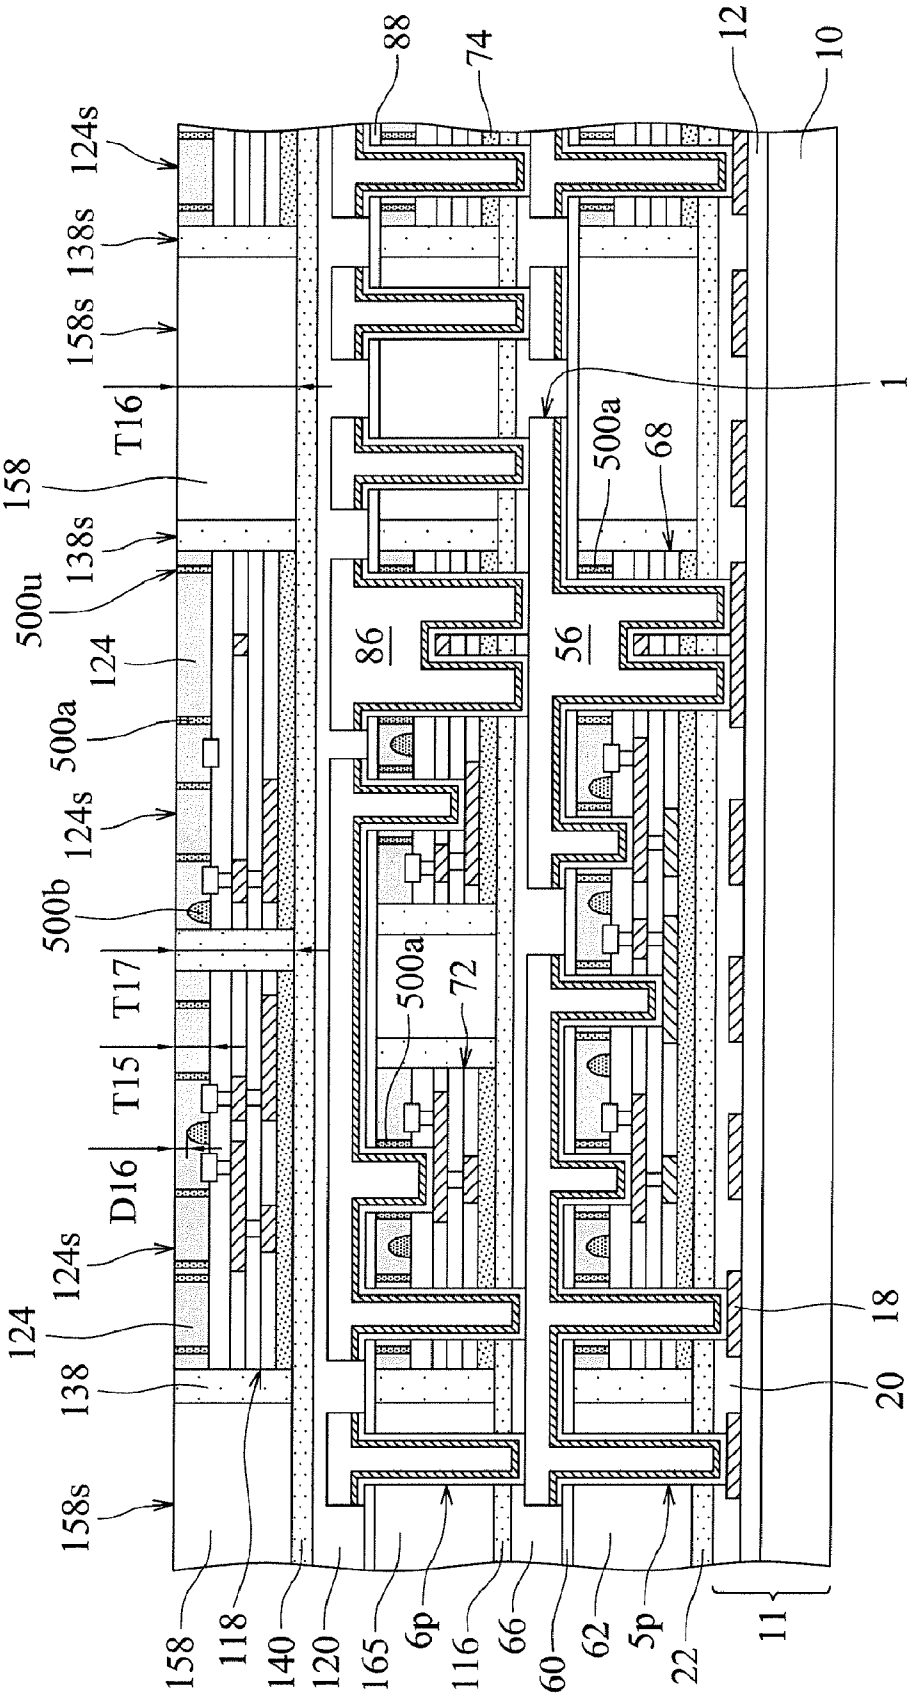

88
74
12
10
124s
138s
158s
T16
158
138s
500u
124
500a
124s
500b
T17
T15
D16
124s
124
138
158s
1
500a
68
86
56
500a
72
18
20
158
118
140
120
165
6p
116
66
60
62
5p
22
11

Fig. 203

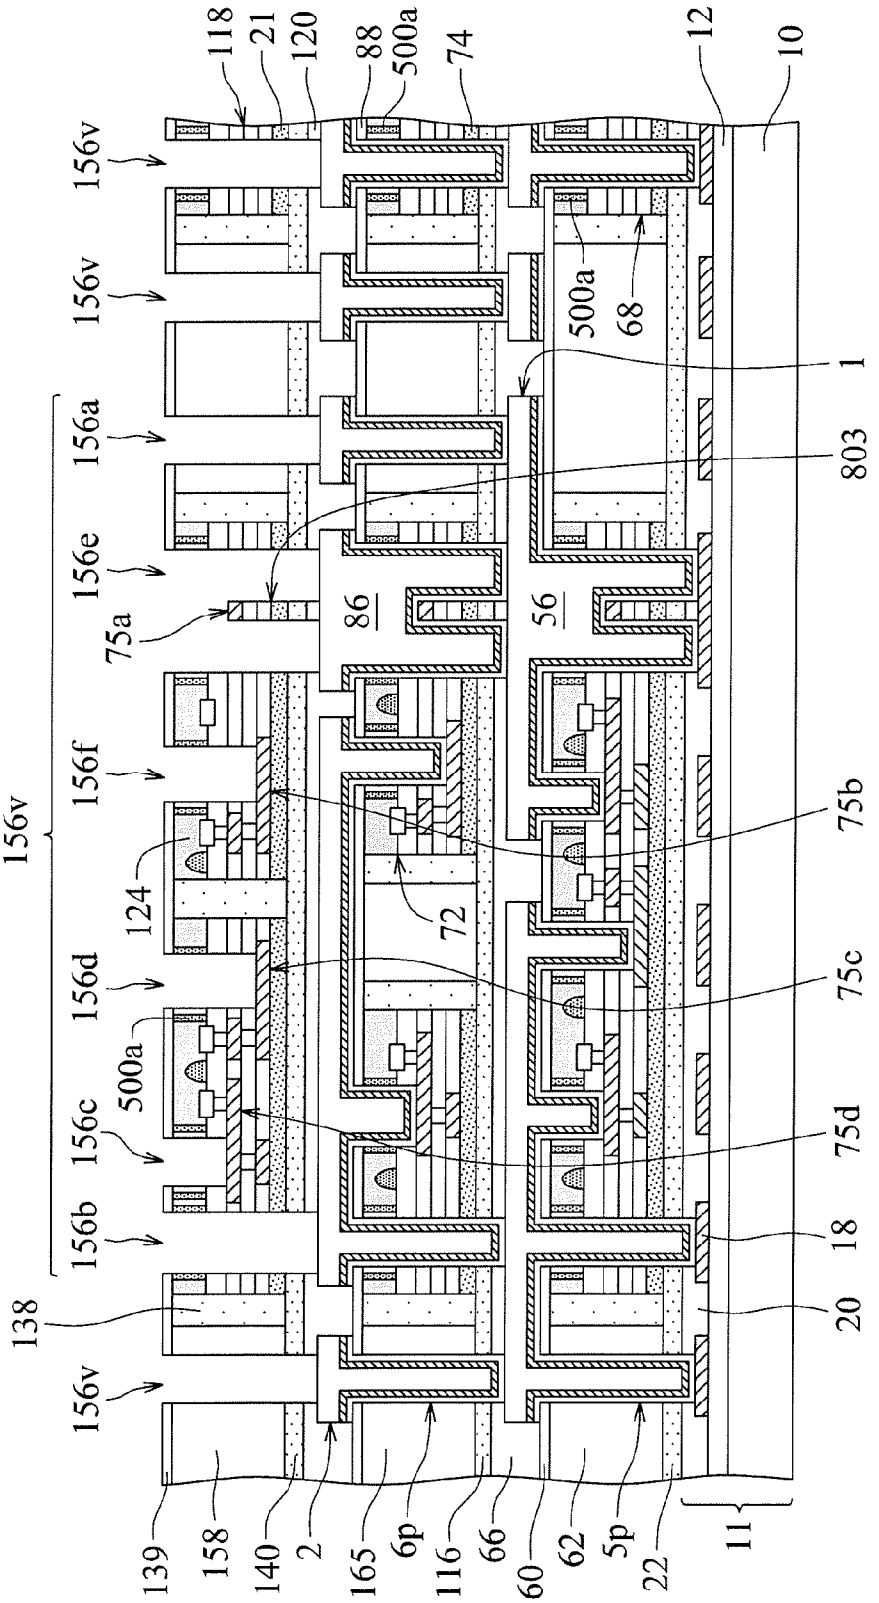

118
21
120
88
500a
74
12
10
156v
156v
156a
156e
156f
156d
156c
156b
156v
156v
500a
68
1
803
75a
86
56
75b
75c
75d
124
72
500a
18
20
138
139
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 204

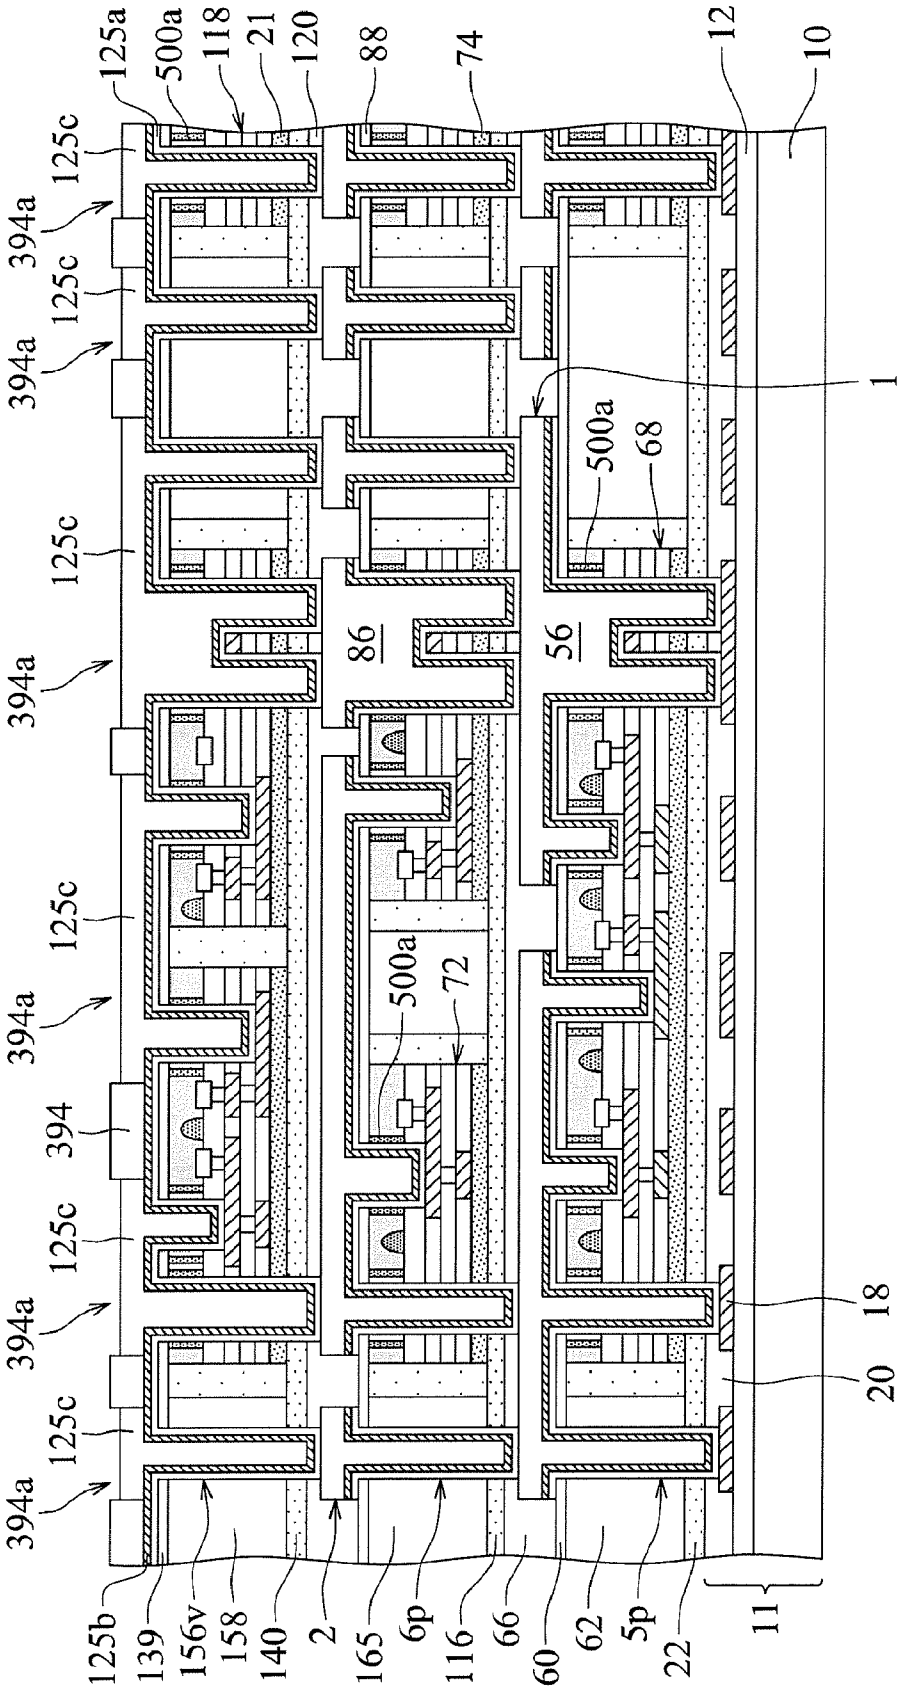

125a
500a
118
21
120
88
74
12
10
125c
394a
125c
394a
125c
394a
1
500a
68
125c
394a
86
56
125c
394a
500a
72
394
125c
394a
125c
394a
18
20
125b
139
156v
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 205

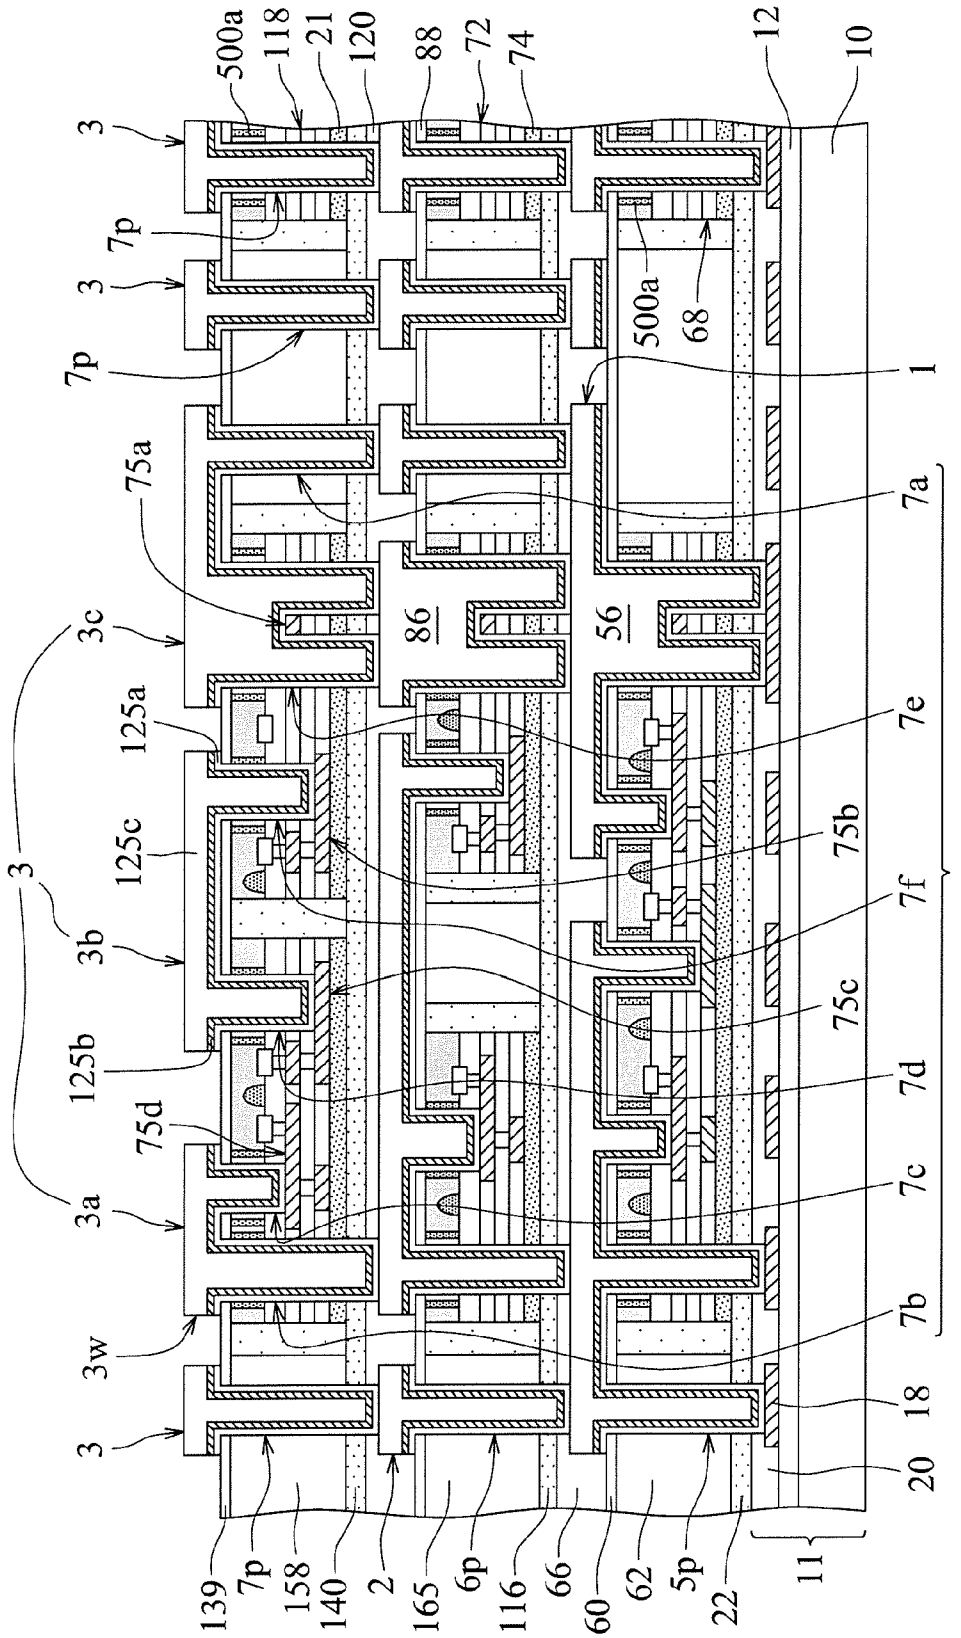

500a
118
21
120
88
72
74
12
10
3
7p
3
7p
500a
68
1
75a
7a
3c
86
56
125a
7e
125c
75b
3
3b
7f
7p
125b
75c
7d
75d
3a
7c
3w
7b
18
3
20
139
7p
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 206

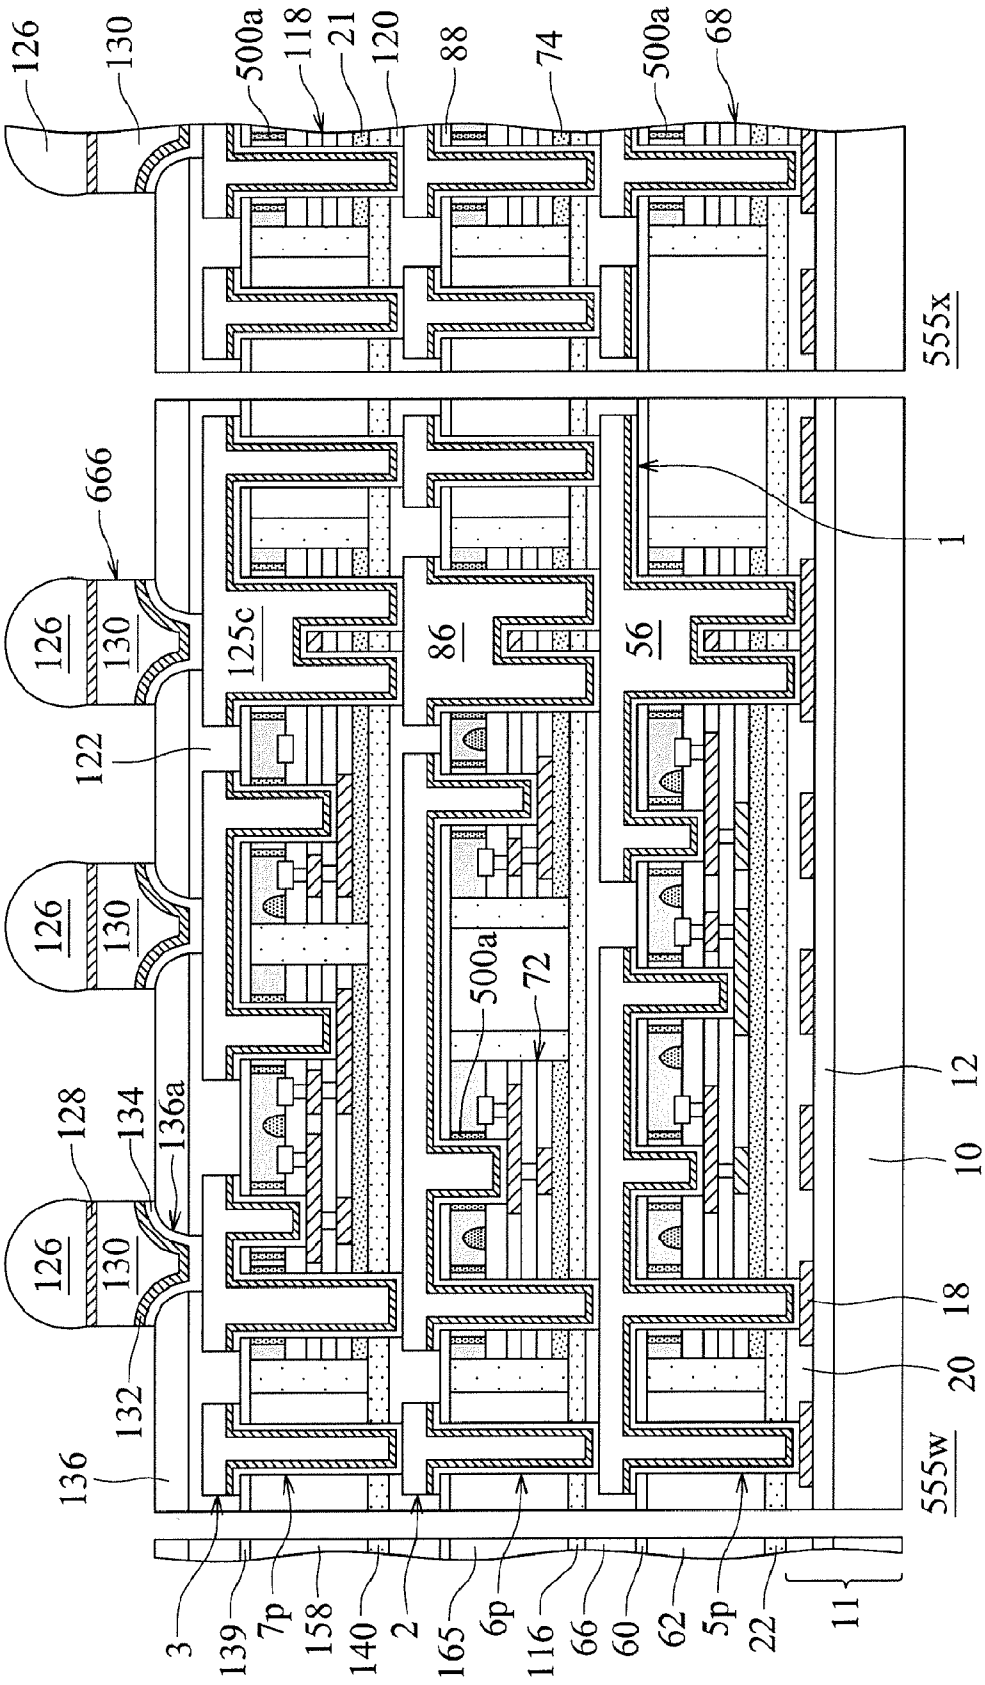

126
130
500a
118
21
120
88
74
500a
68
555x
666
126
130
125c
86
56
1
122
126
130
500a
72
126
130
128
134
136a
12
10
18
20
132
136
555w
3
139
7p
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 207

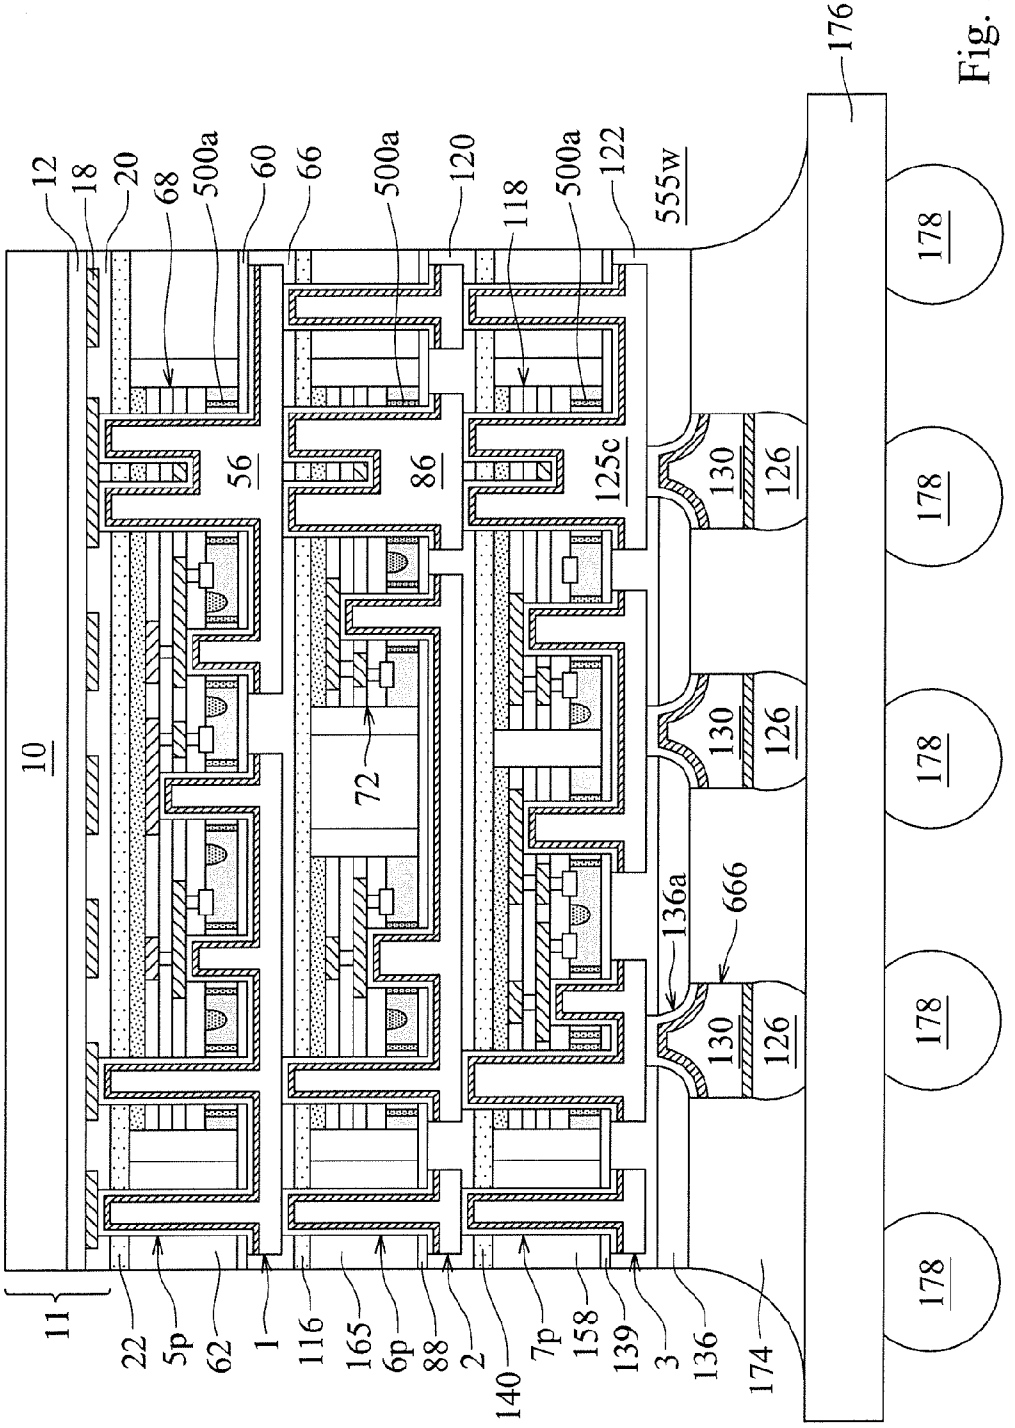

12
18
20
68
500a
60
66
500a
120
118
500a
122
555w
176
178
178
178
178
178
10
56
86
125c
130
126
130
126
130
126
72
136a
666
11
22
5p
62
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 208

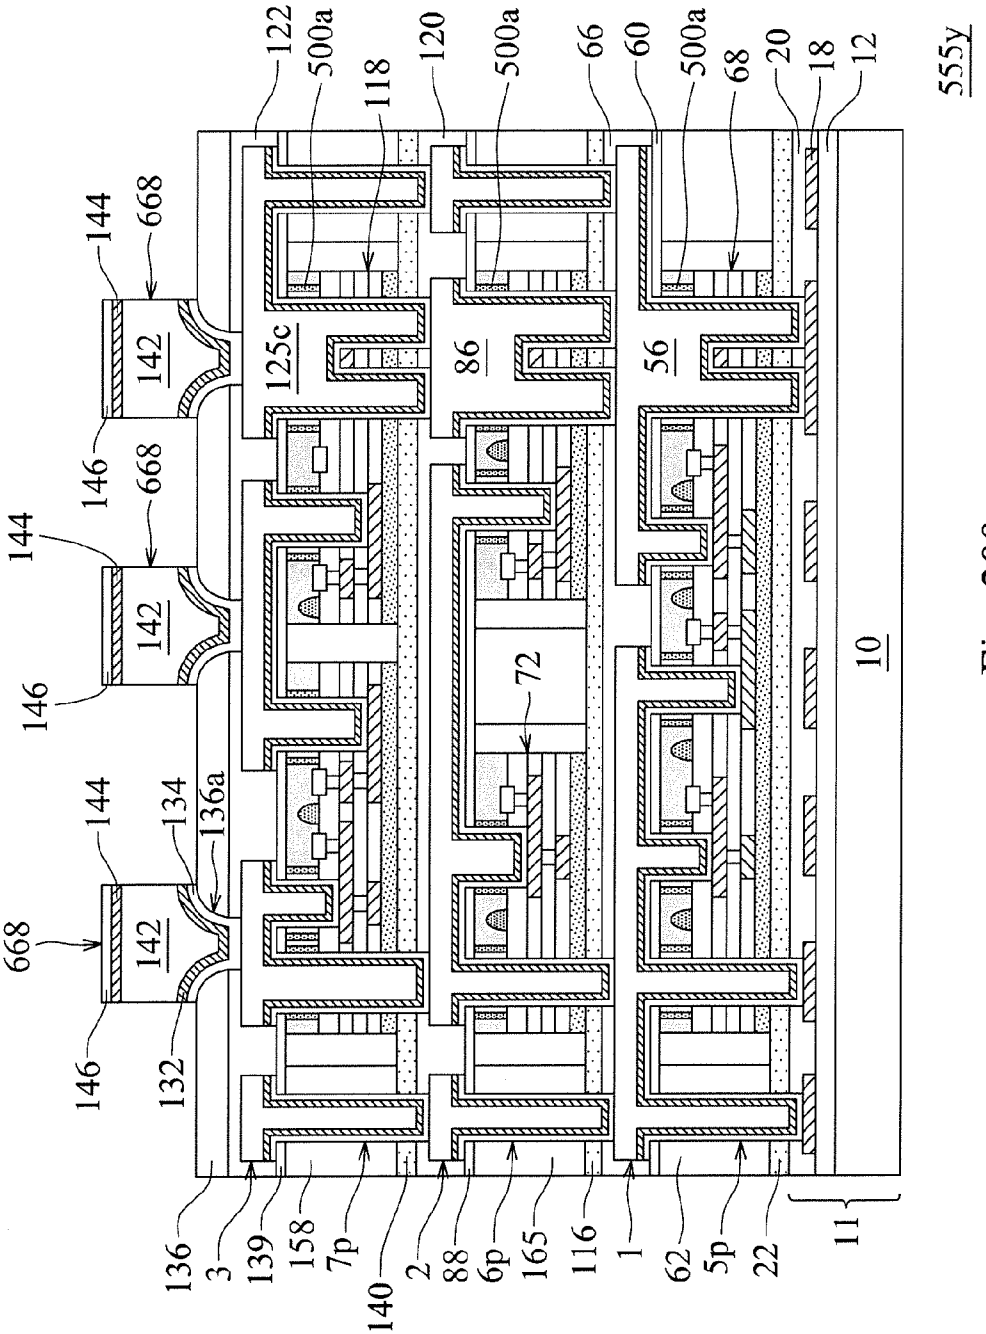

555y
122
500a
118
120
500a
66
60
500a
68
20
18
12
668
144
142
146
125c
86
56
72
10
134
136a
132
136
3
139
158
7p
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 209

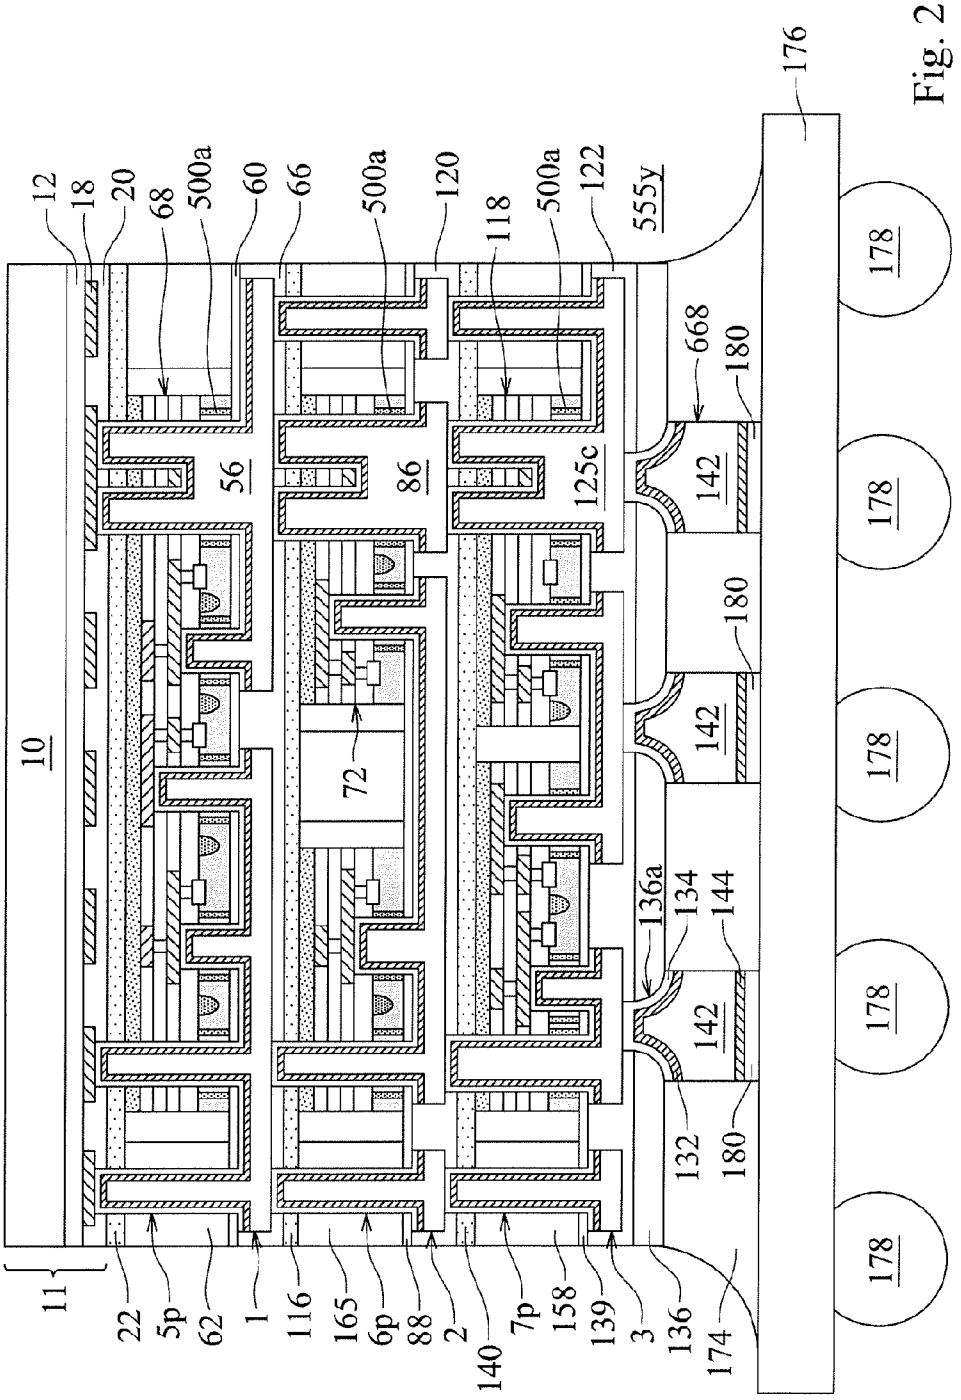

12
18
20
68
500a
60
66
500a
120
118
500a
122
555y
176
178
668
180
142
56
86
125c
72
10
136a
134
144
132
11
22
5p
62
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 210

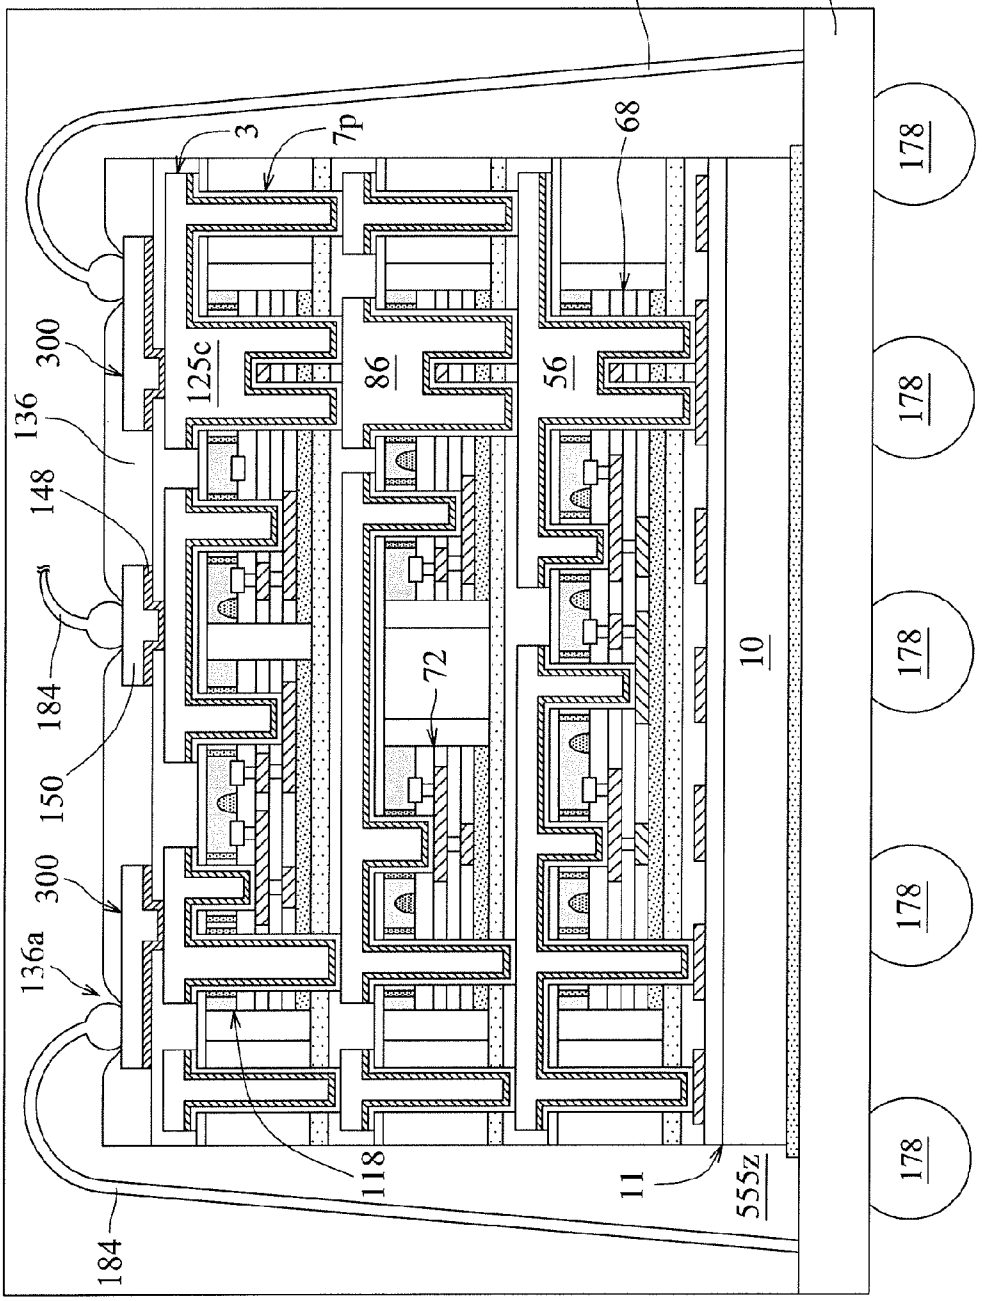

184
176
566e
3
7p
68
178
300
125c
86
56
136
148
184
72
10
150
300
136a
118
11
555z
184

Fig. 211

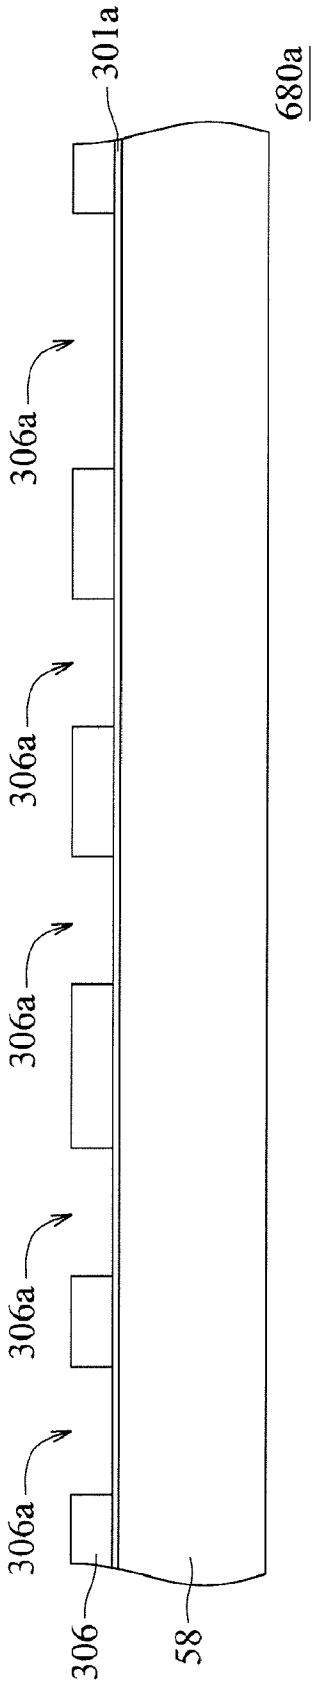


Fig. 212A

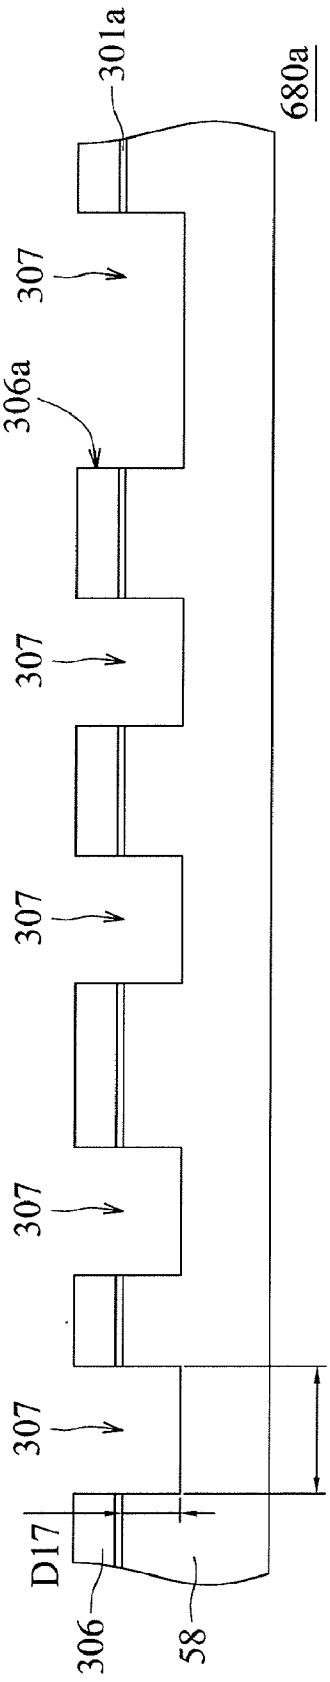


Fig. 212B

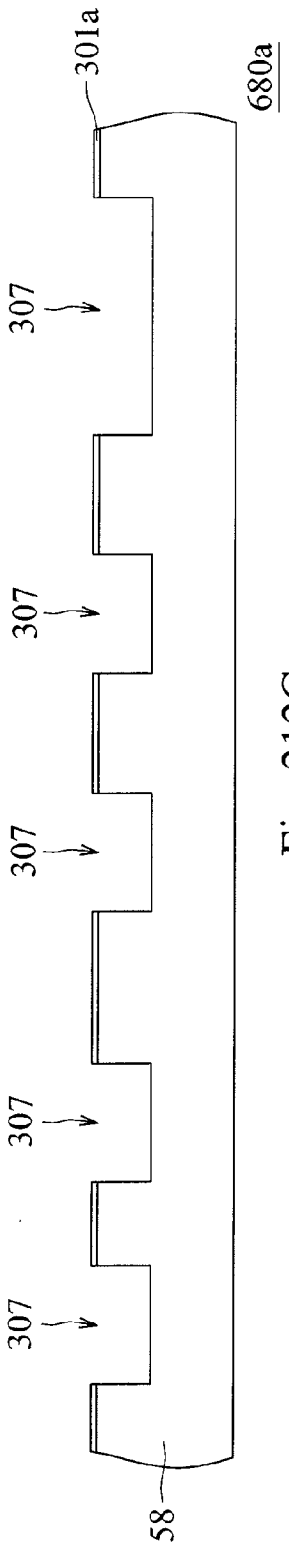


Fig. 212C

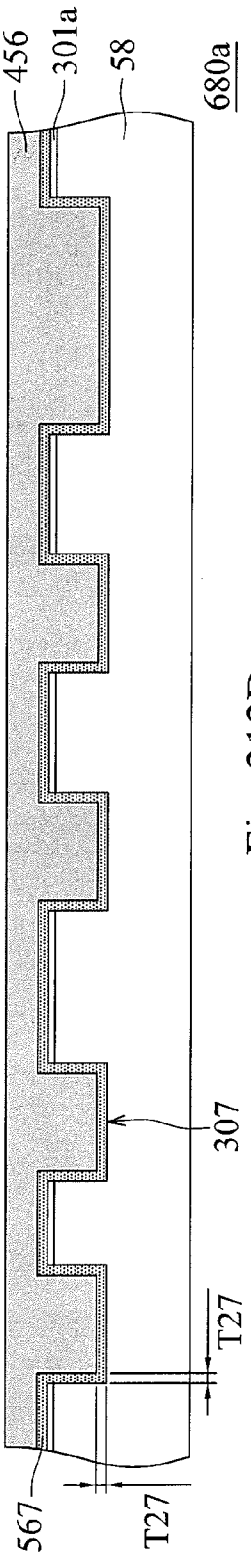


Fig. 212D

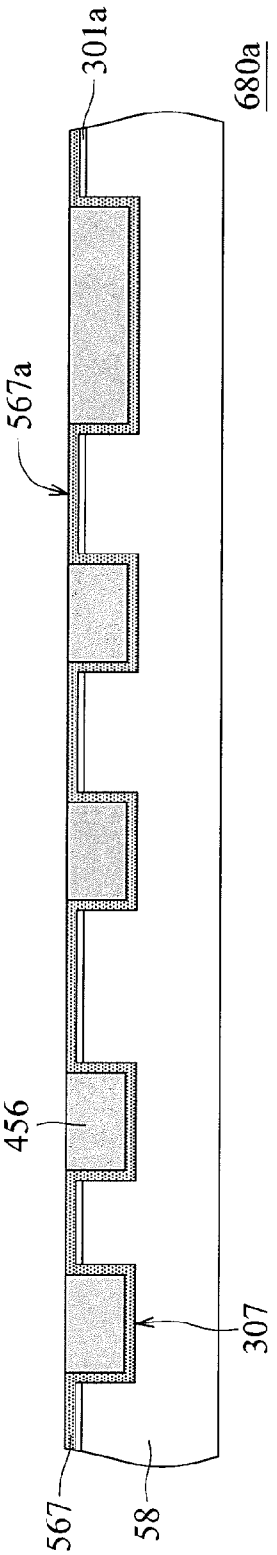


Fig. 212E

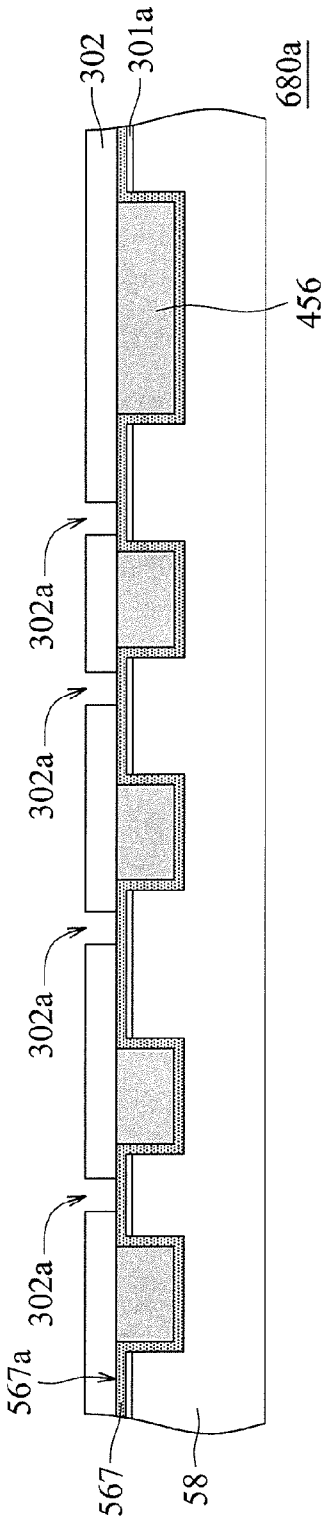


Fig. 212F

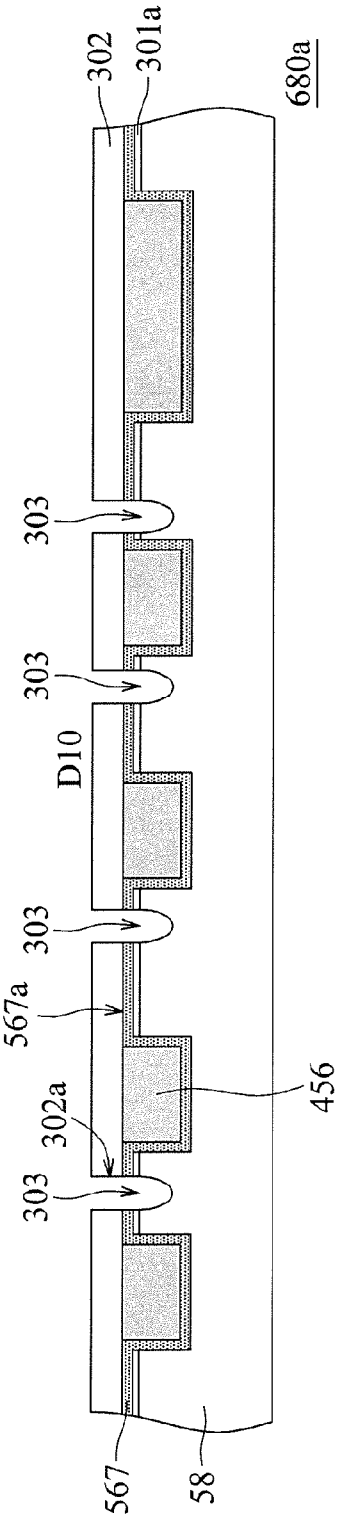


Fig. 212G

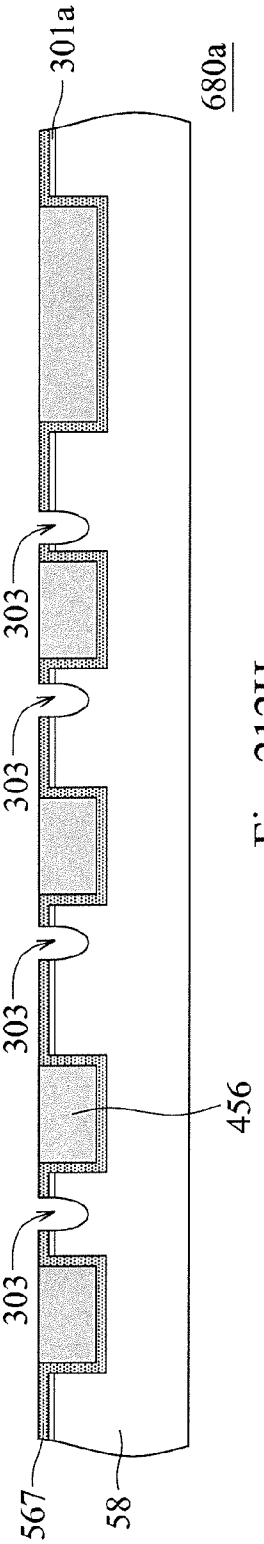


Fig. 212H

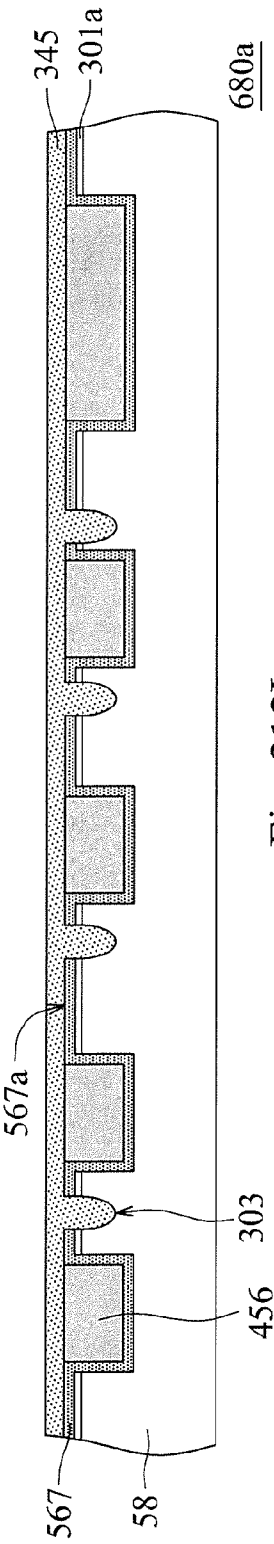


Fig. 212I

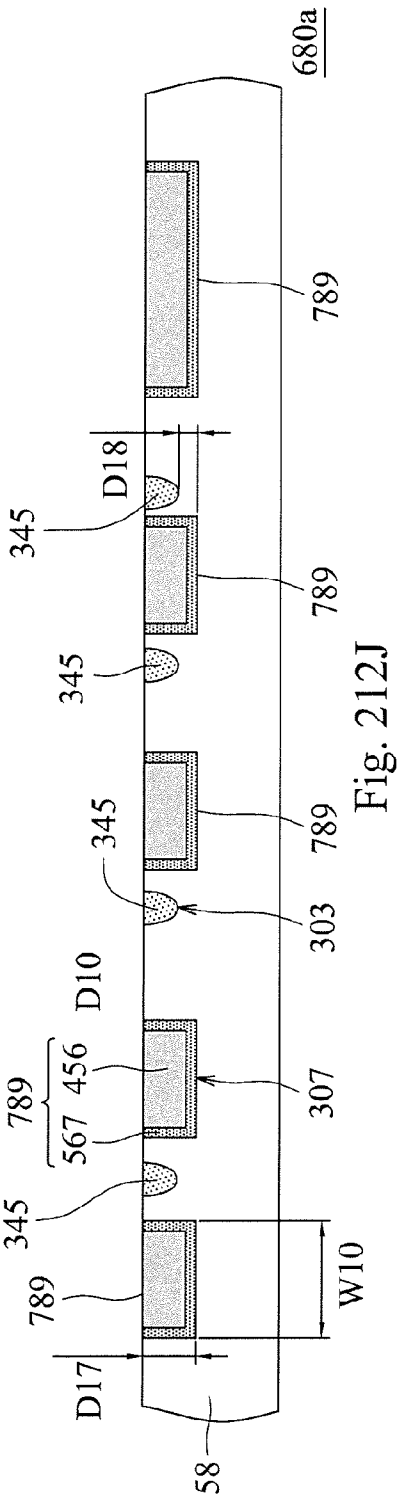


Fig. 212J

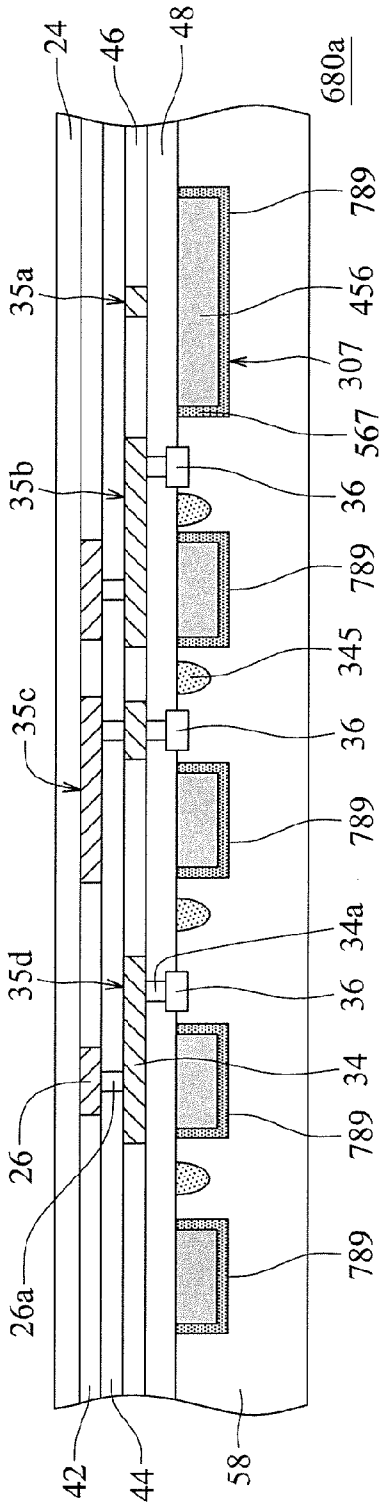


Fig. 212K

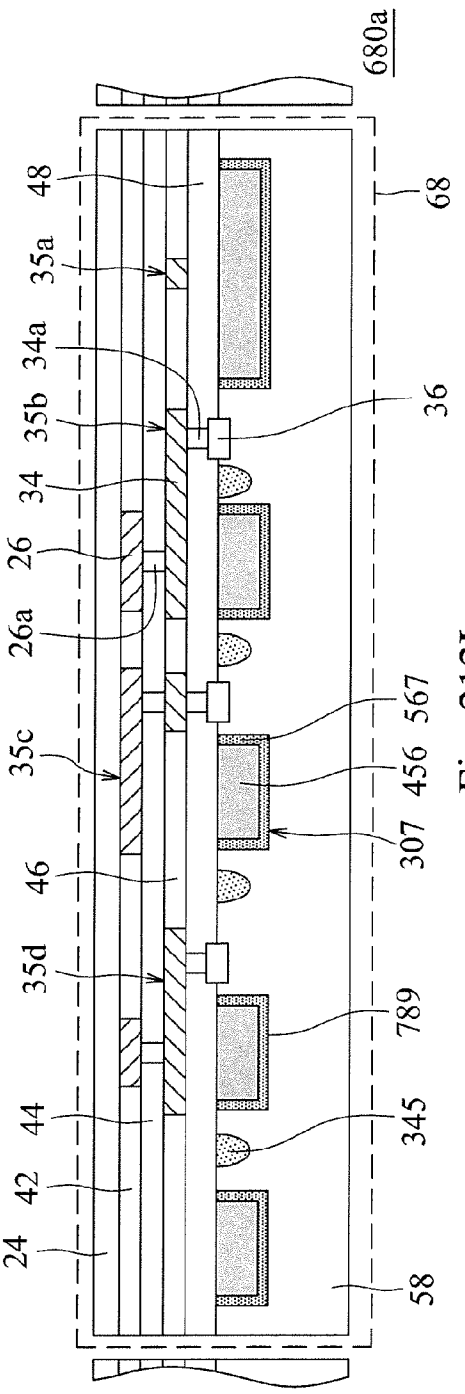


Fig. 212L

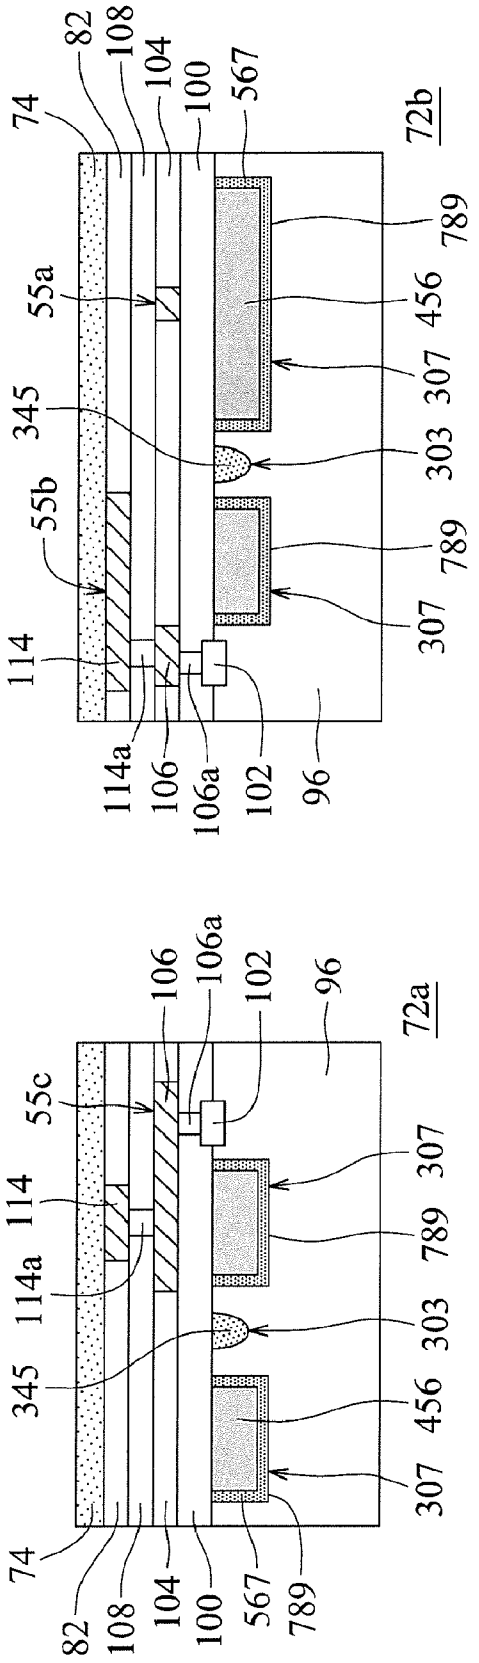

72b
72a
74
82
108
104
100
567
789
55a
456
307
345
303
55b
114
114a
106
106a
102
96
55c

Fig. 212M

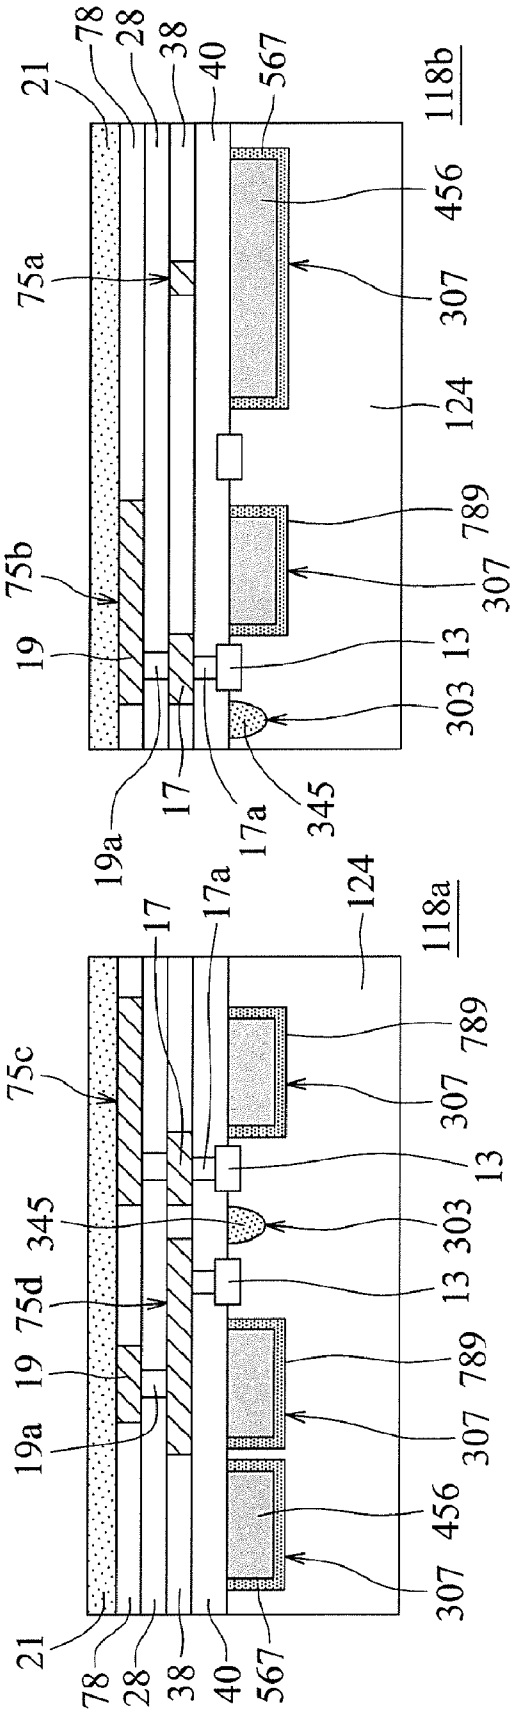

21
78
28
38
40
567
118b
456
307
75a
124
789
307
75b
19
13
303
345
17a
17
19a
124
17
17a
118a
789
307
75c
13
345
303
13
75d
19
789
19a
307
456
307
21
78
28
38
40
567

Fig. 212N

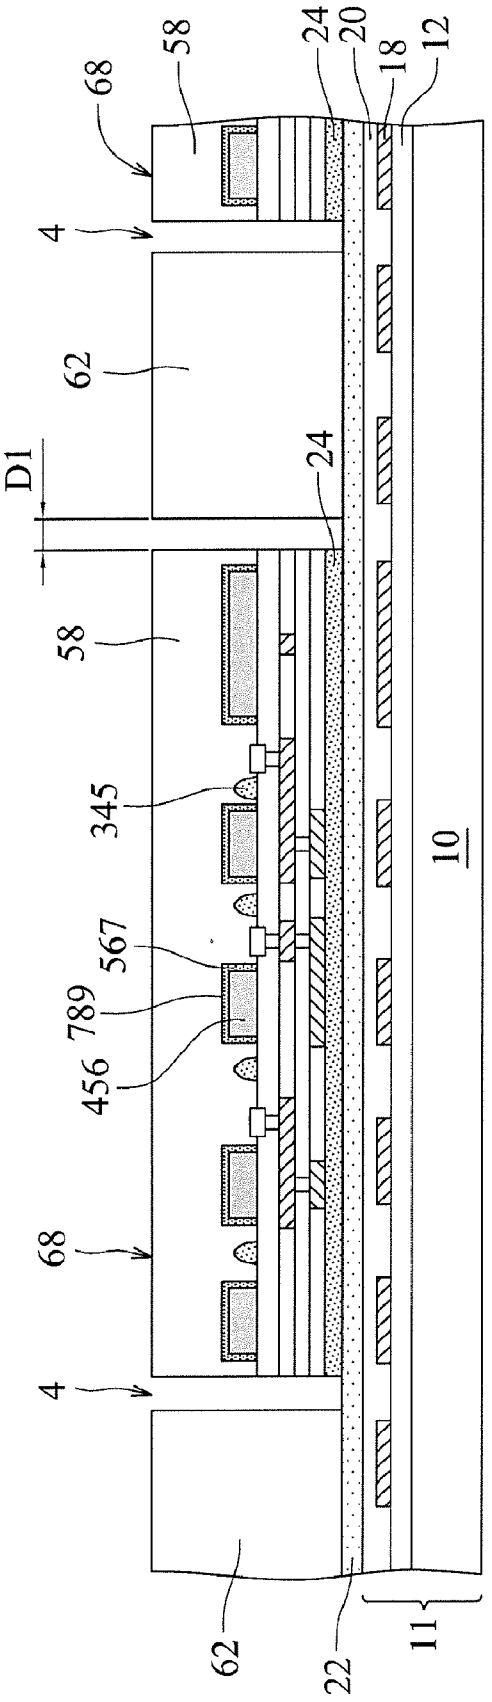


Fig. 213

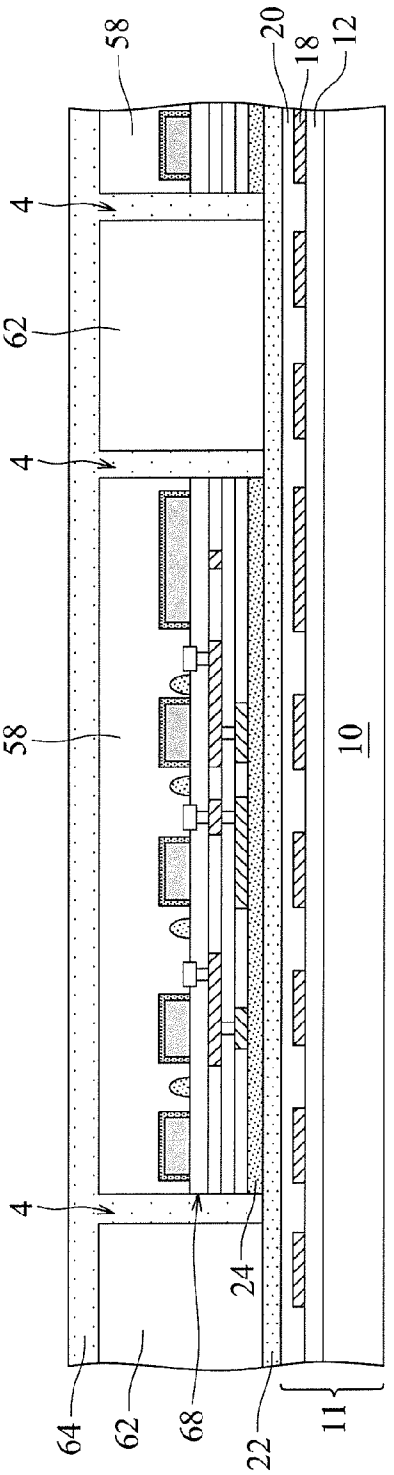


Fig. 214

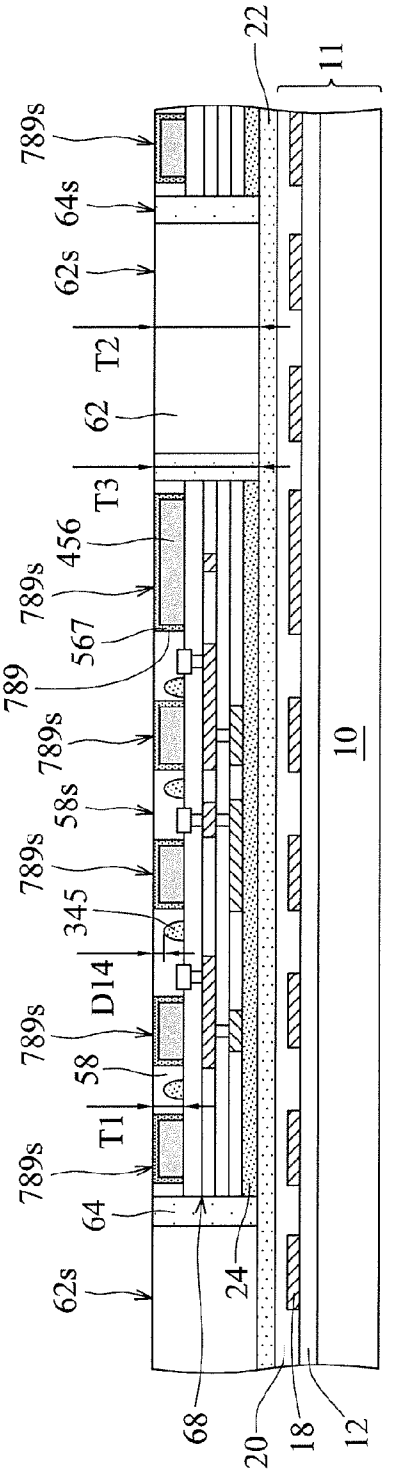


Fig. 215

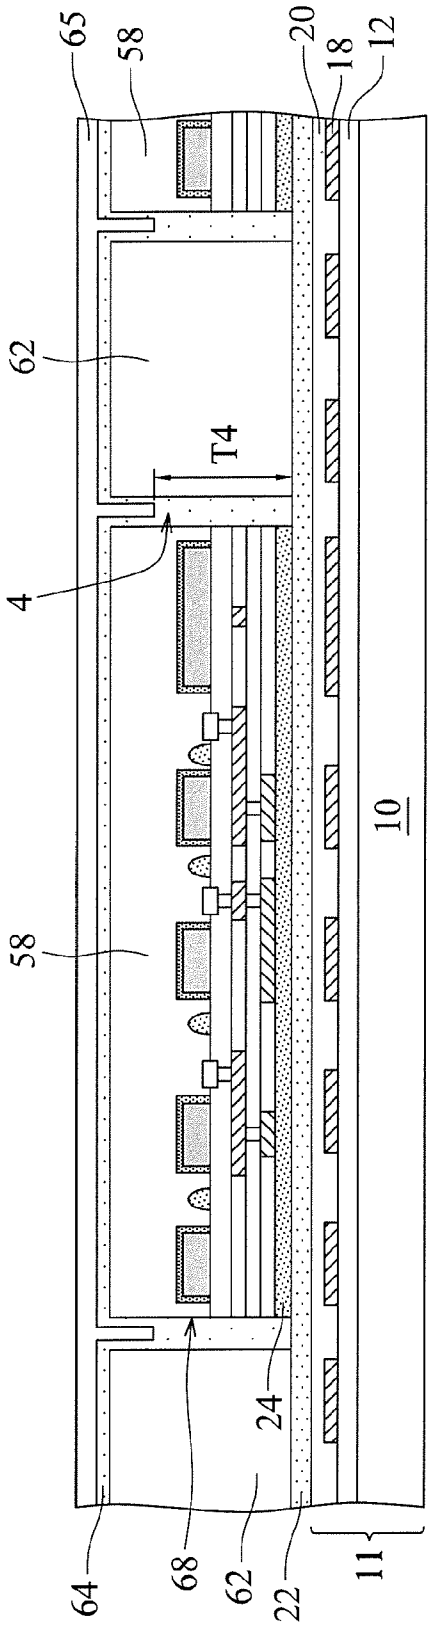


Fig. 216

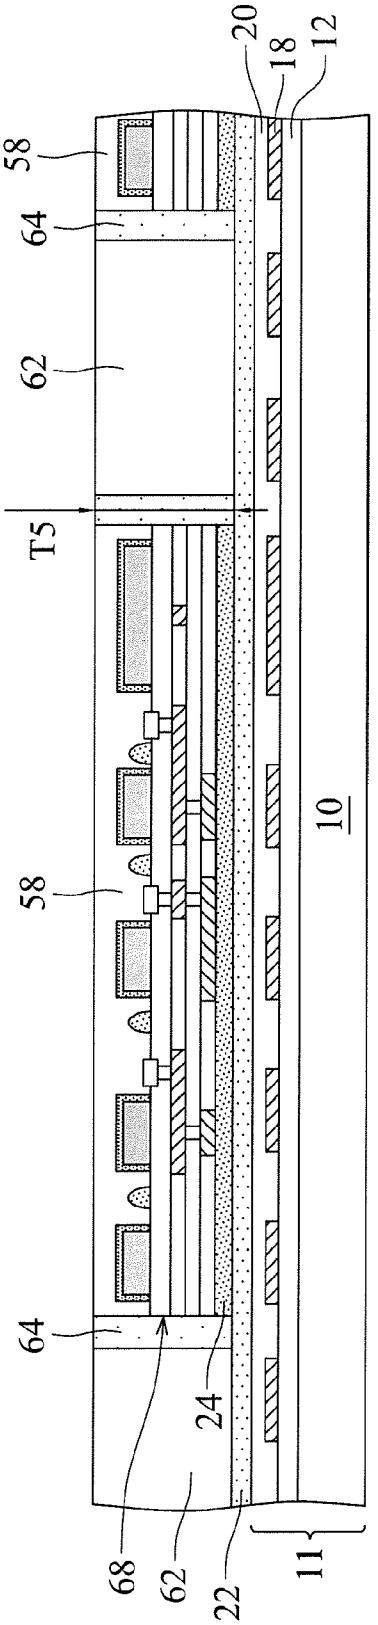


Fig. 217

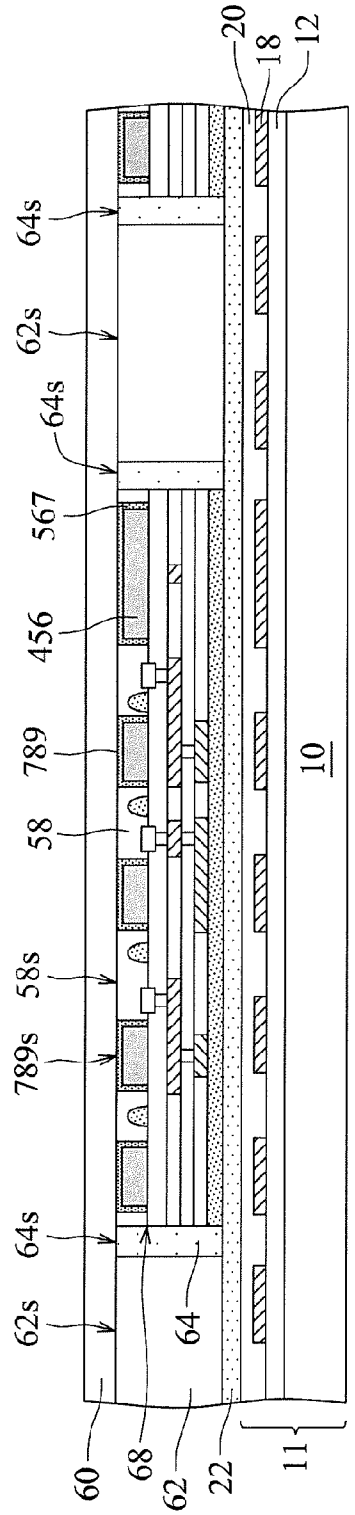


Fig. 218

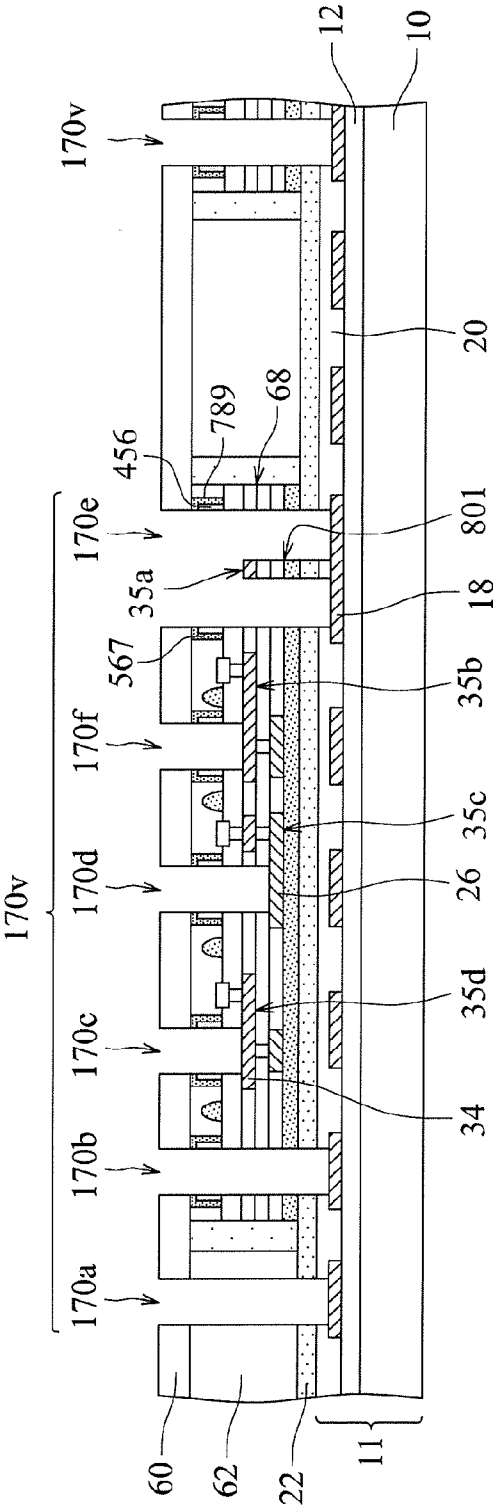


Fig. 219

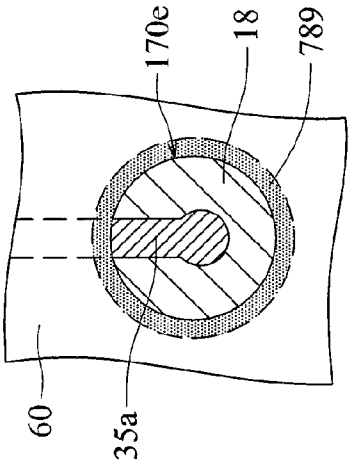


Fig. 222

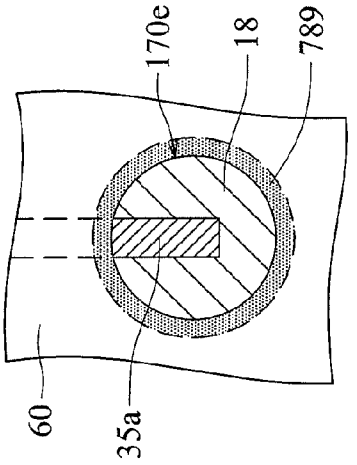


Fig. 221

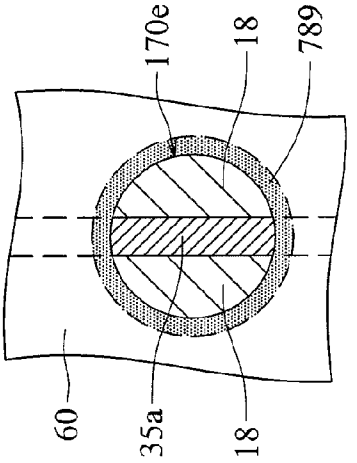


Fig. 220

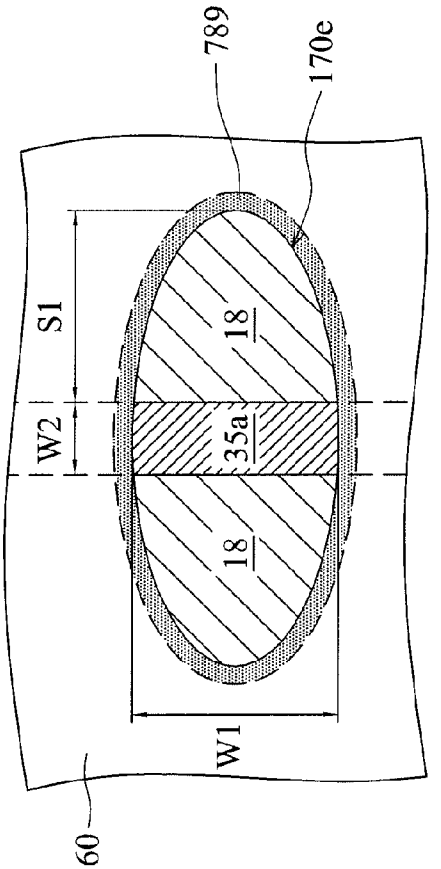


Fig. 223

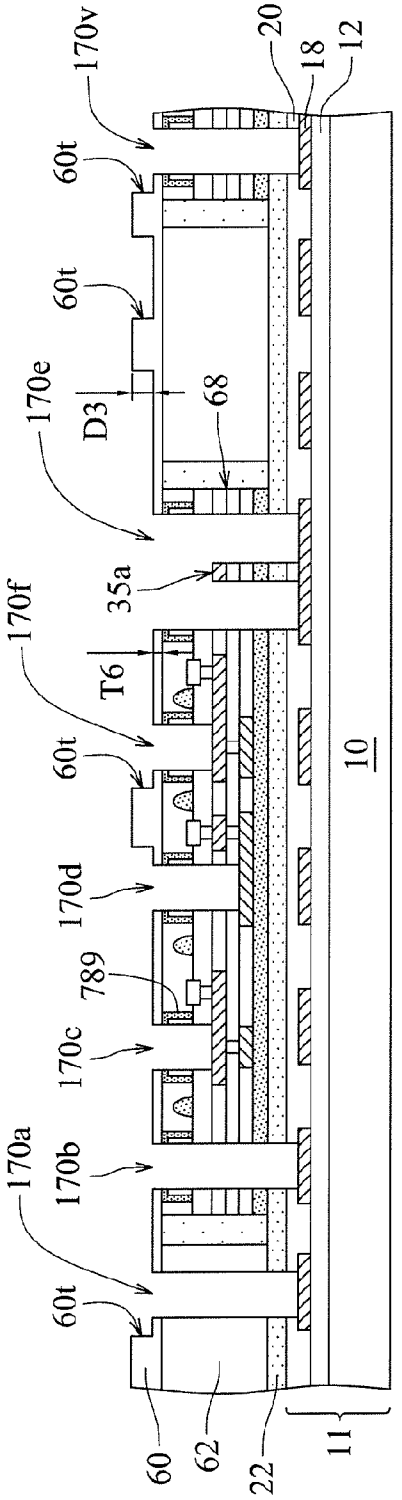


Fig. 224

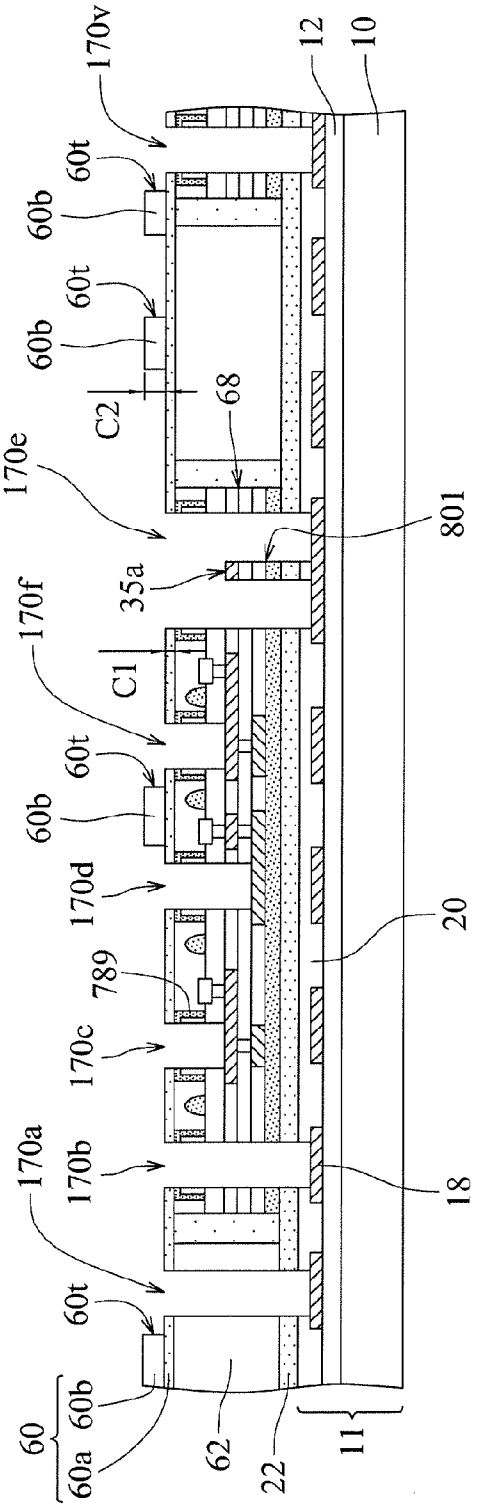


Fig. 225

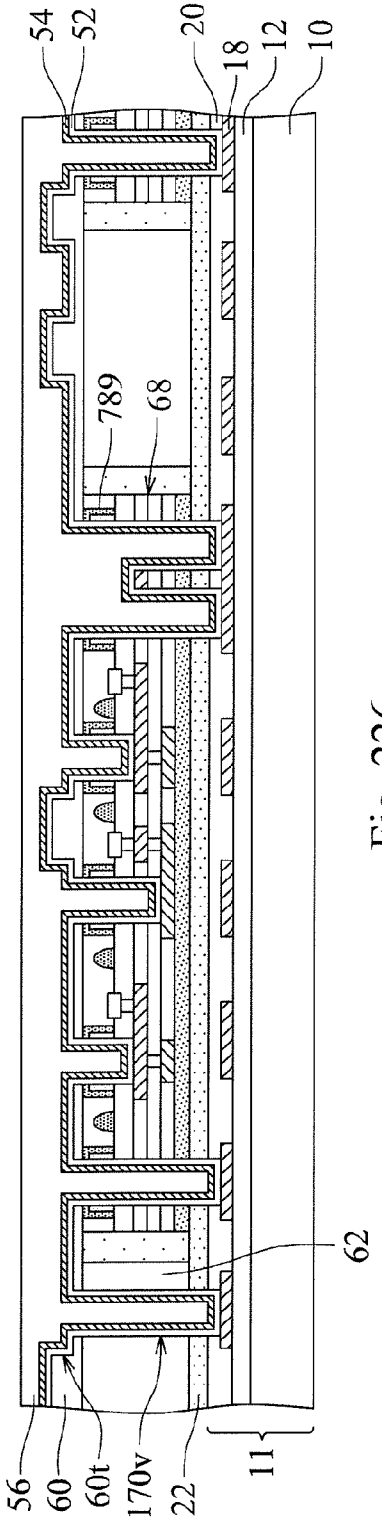


Fig. 226

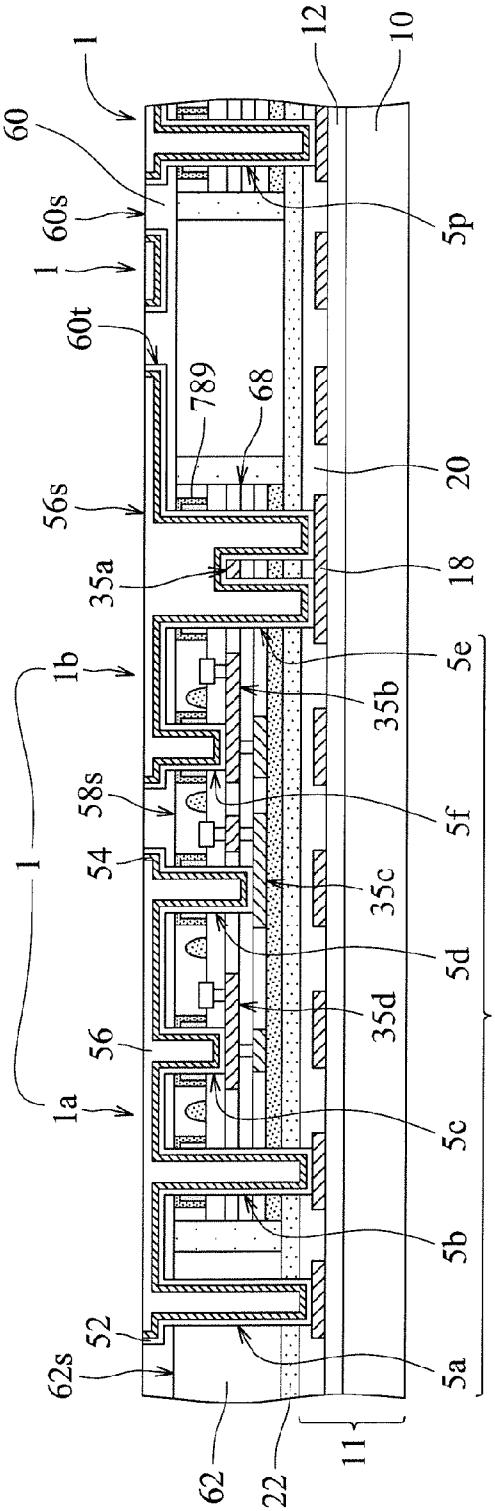


Fig. 227

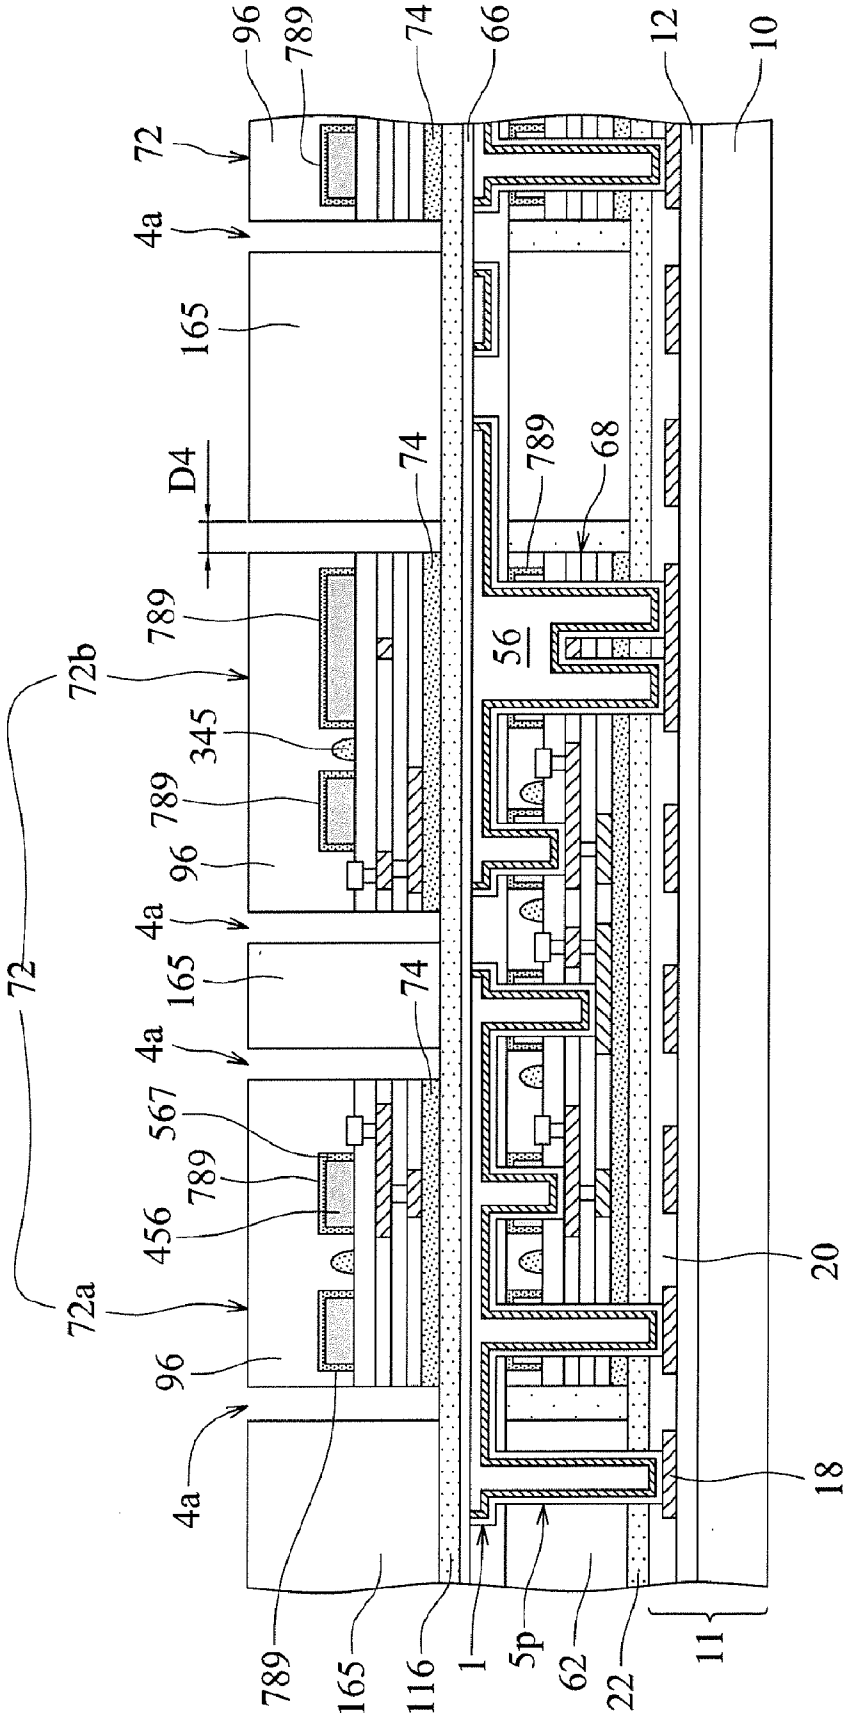

96
789
74
66
12
10
72
4a
165
D4
74
789
68
789
56
72b
345
789
96
4a
165
74
4a
567
789
456
72
72a
96
4a
20
18
789
165
116
1
5p
62
22
11

Fig. 228

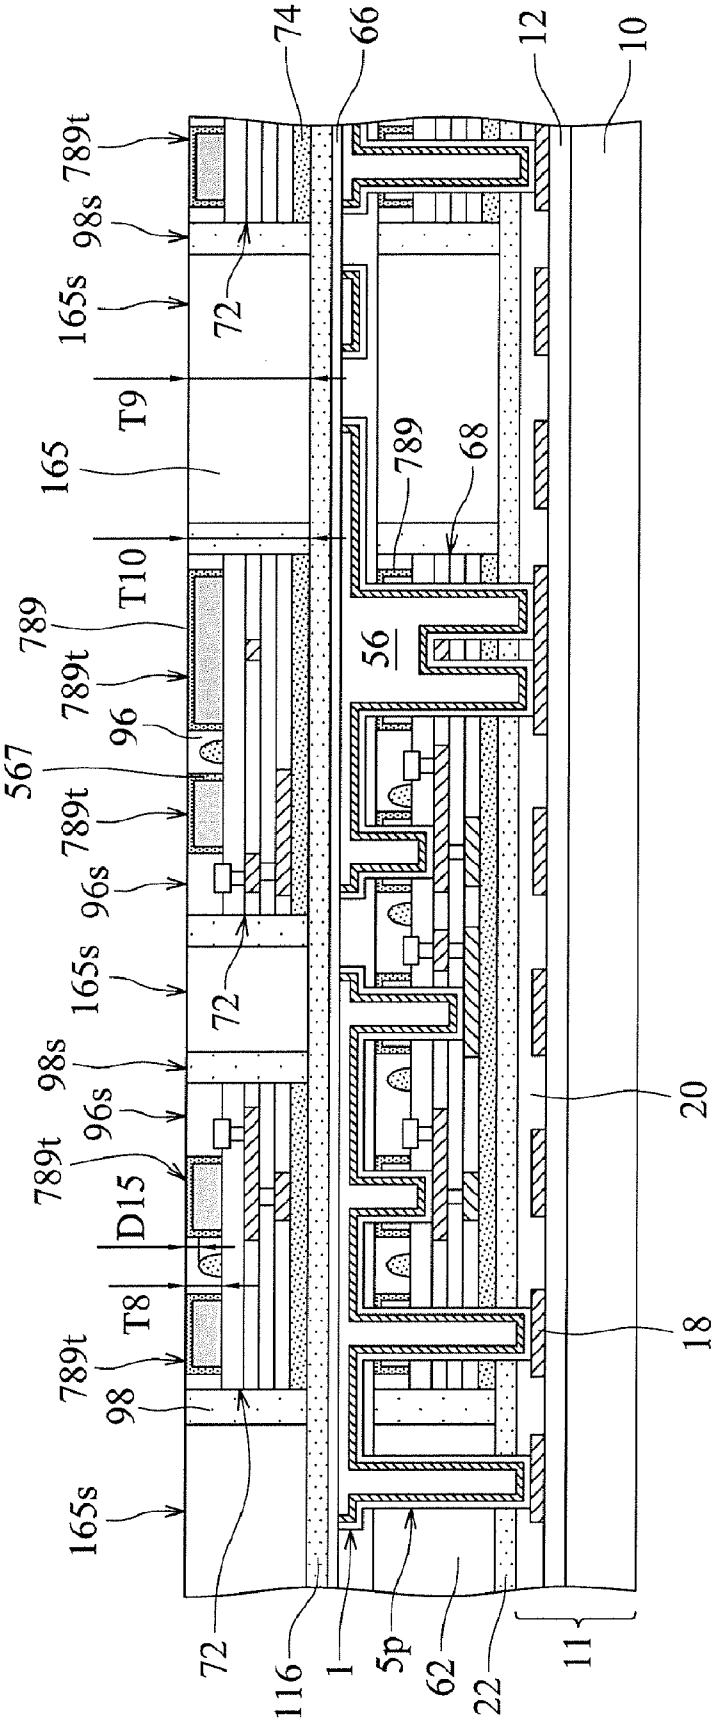

74
66
12
10
789t
98s
165s
72
T9
165
789
68
T10
789
56
789t
96
567
789t
96s
165s
72
98s
96s
789t
D15
T8
789t
98
165s
72
116
1
5p
62
22
11
20
18

Fig. 229

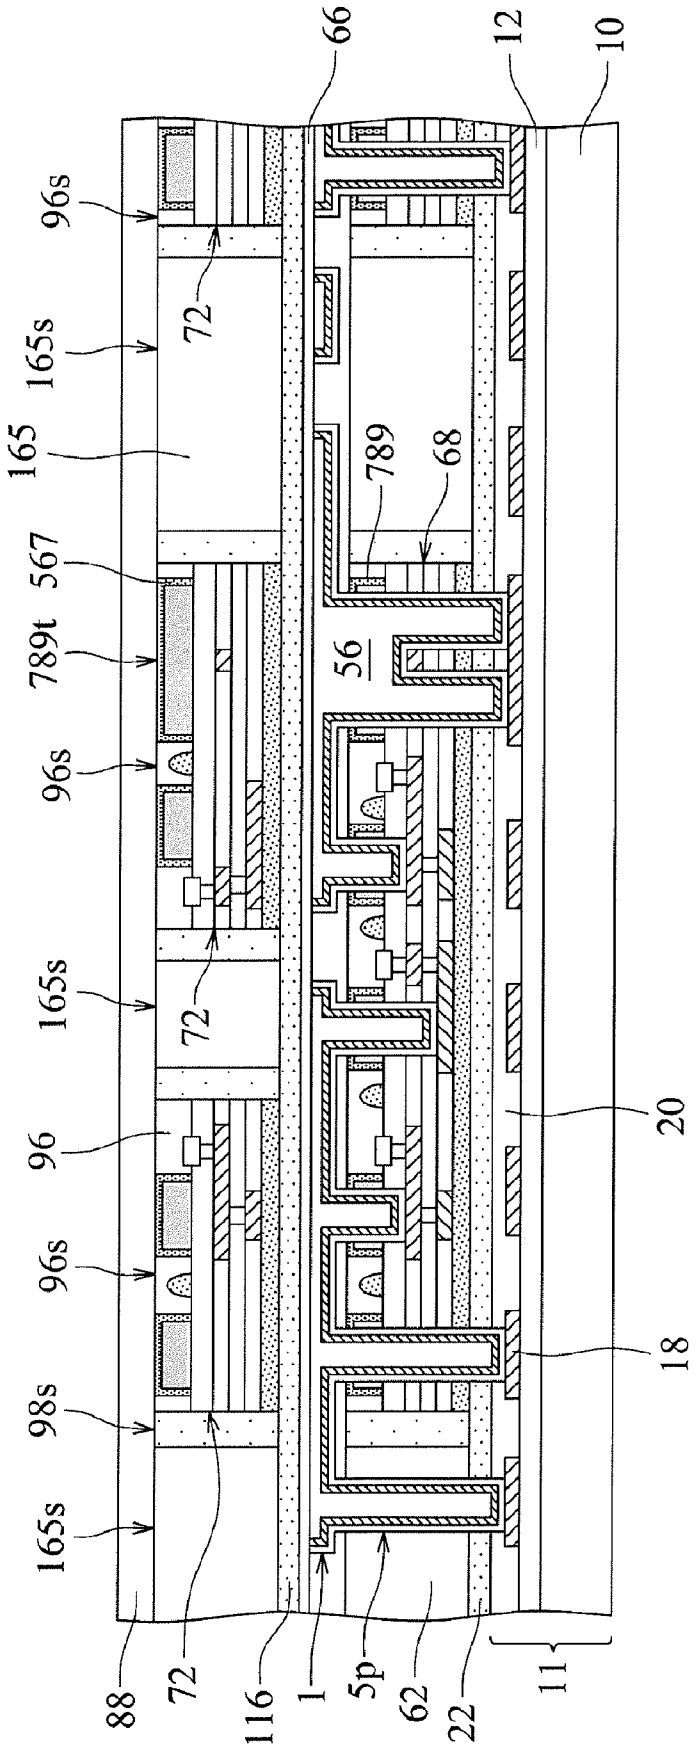

66
12
10
96s
72
165s
165
789
68
567
789t
56
96s
72
165s
96
20
96s
98s
18
165s
88
72
116
1
5p
62
22
11

Fig. 230

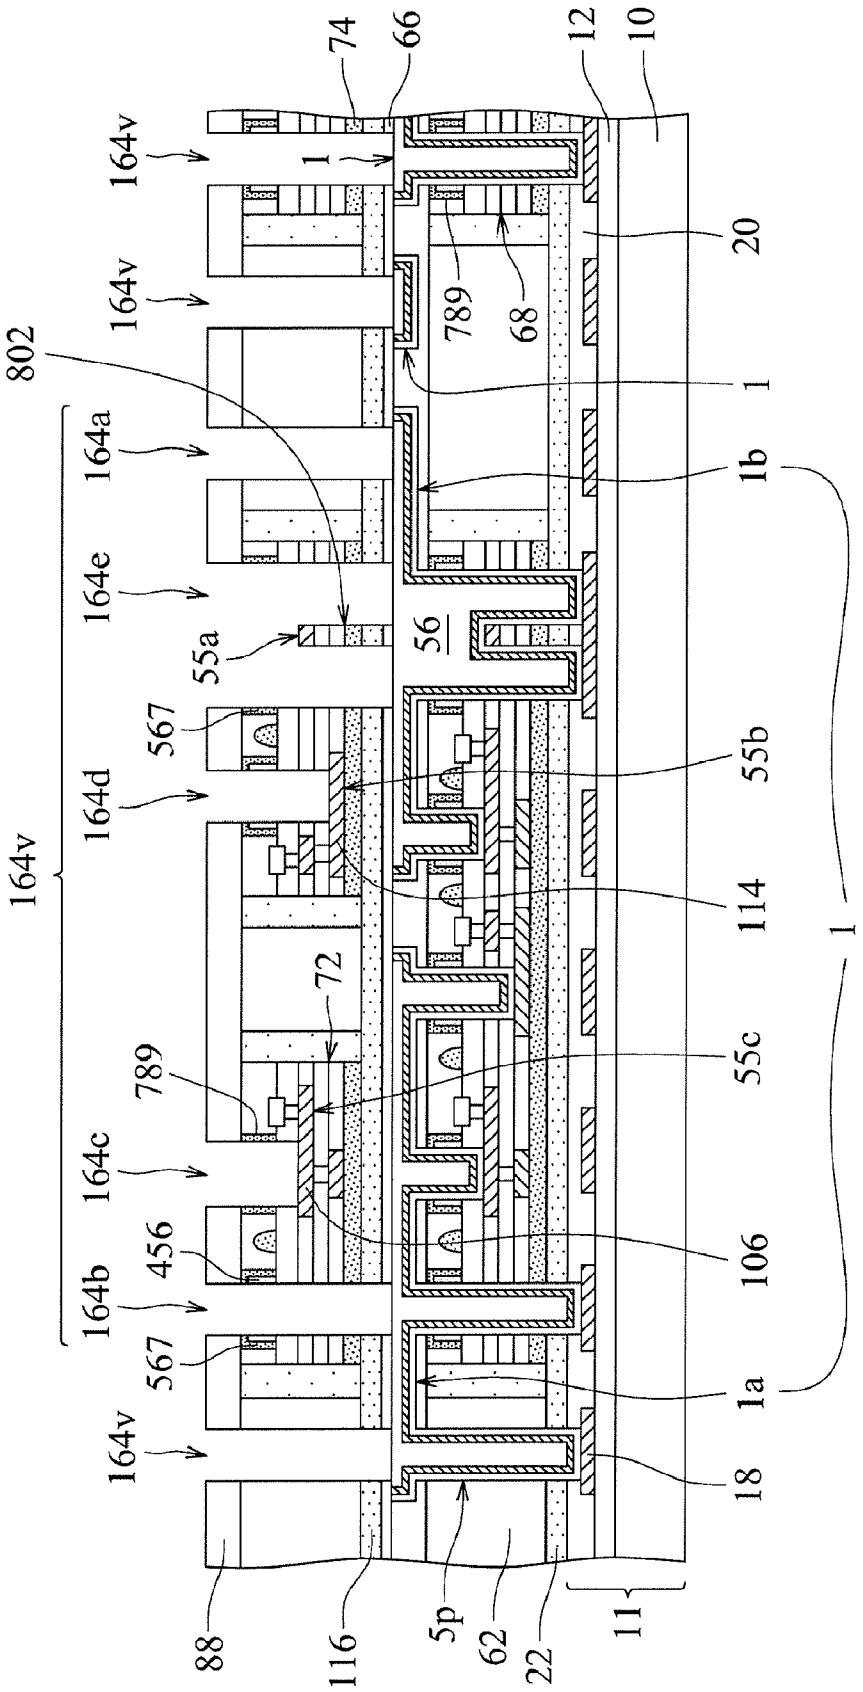

74
66
12
10
164v
1
20
789
68
802
164a
1b
164e
56
55a
567
164d
55b
114
72
789
55c
164c
456
106
164b
567
1a
164v
18
88
116
5p
62
22
11
1

Fig. 231

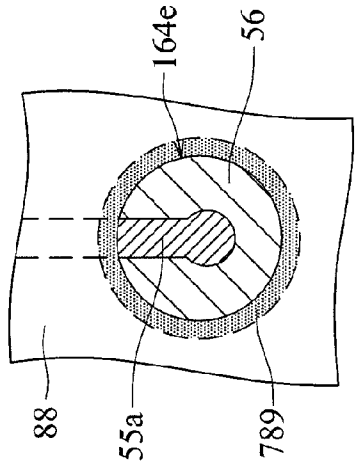


Fig. 234

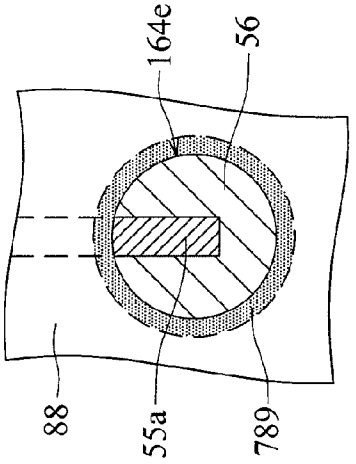


Fig. 233

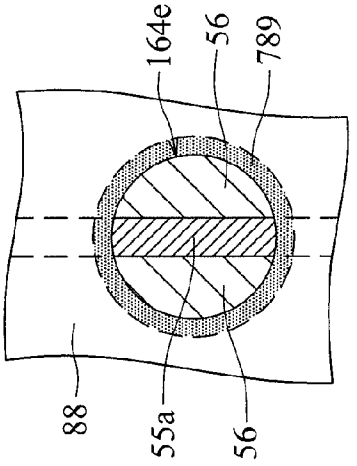


Fig. 232

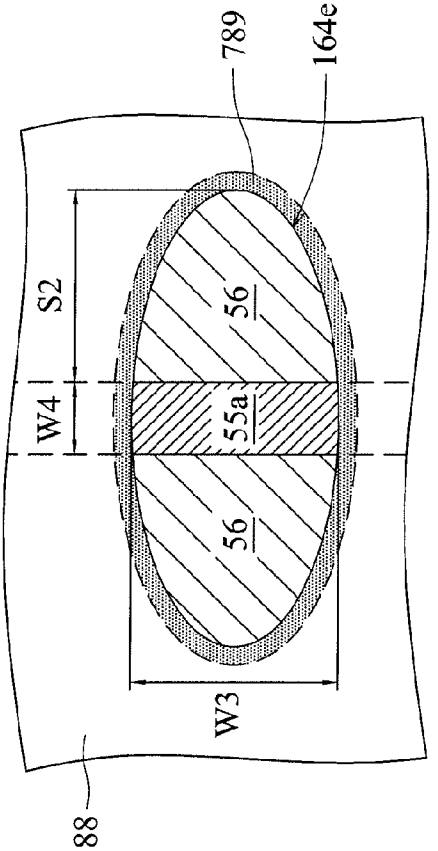


Fig. 235

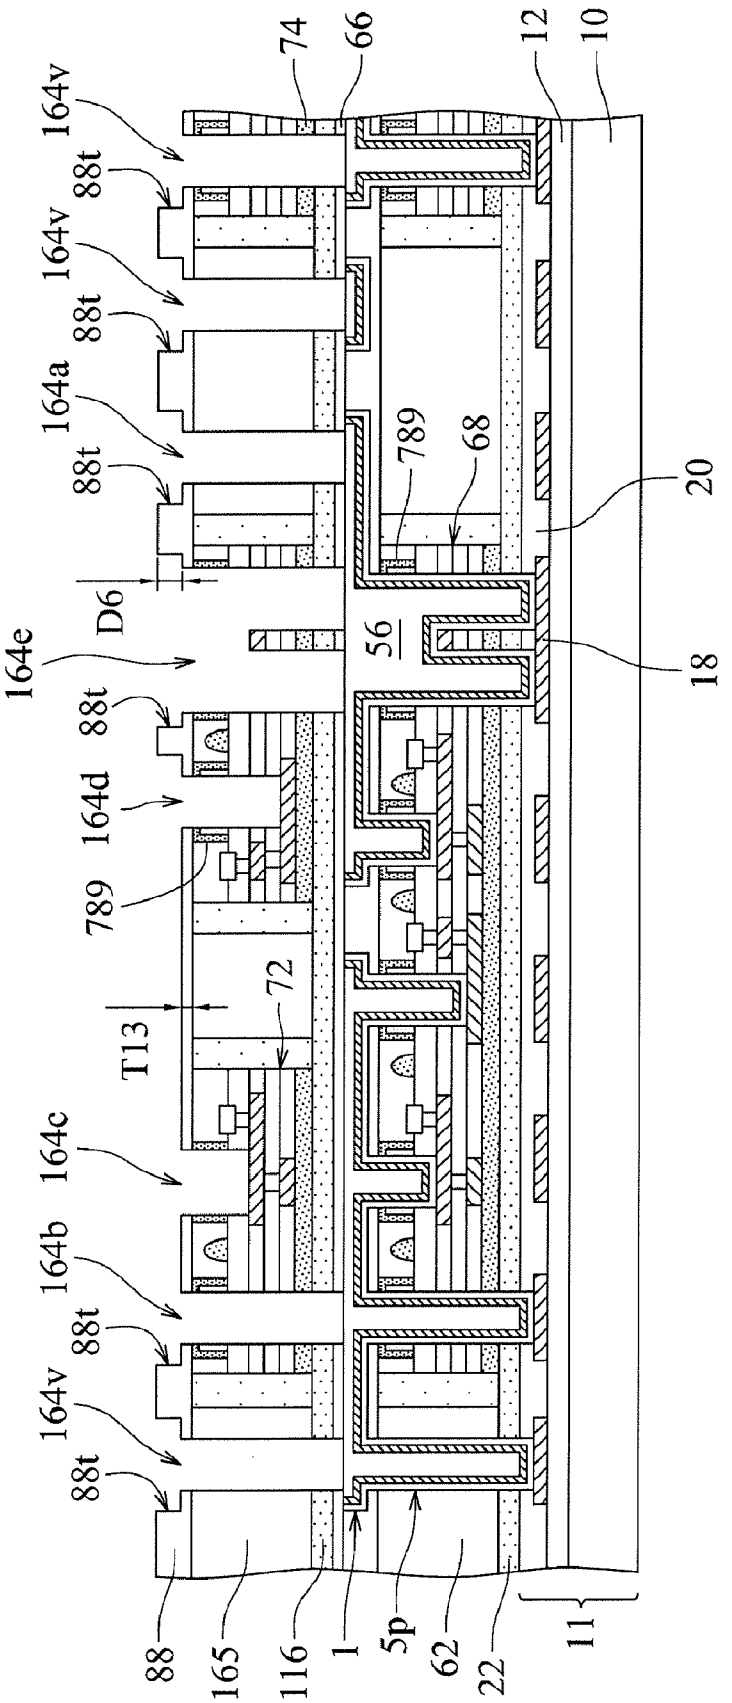

74
66
12
10
164v
88t
164v
88t
164a
88t
789
68
20
D6
164e
56
18
88t
164d
789
72
T13
164c
164b
88t
164v
88t
88
165
116
1
5p
62
22
11

Fig. 236

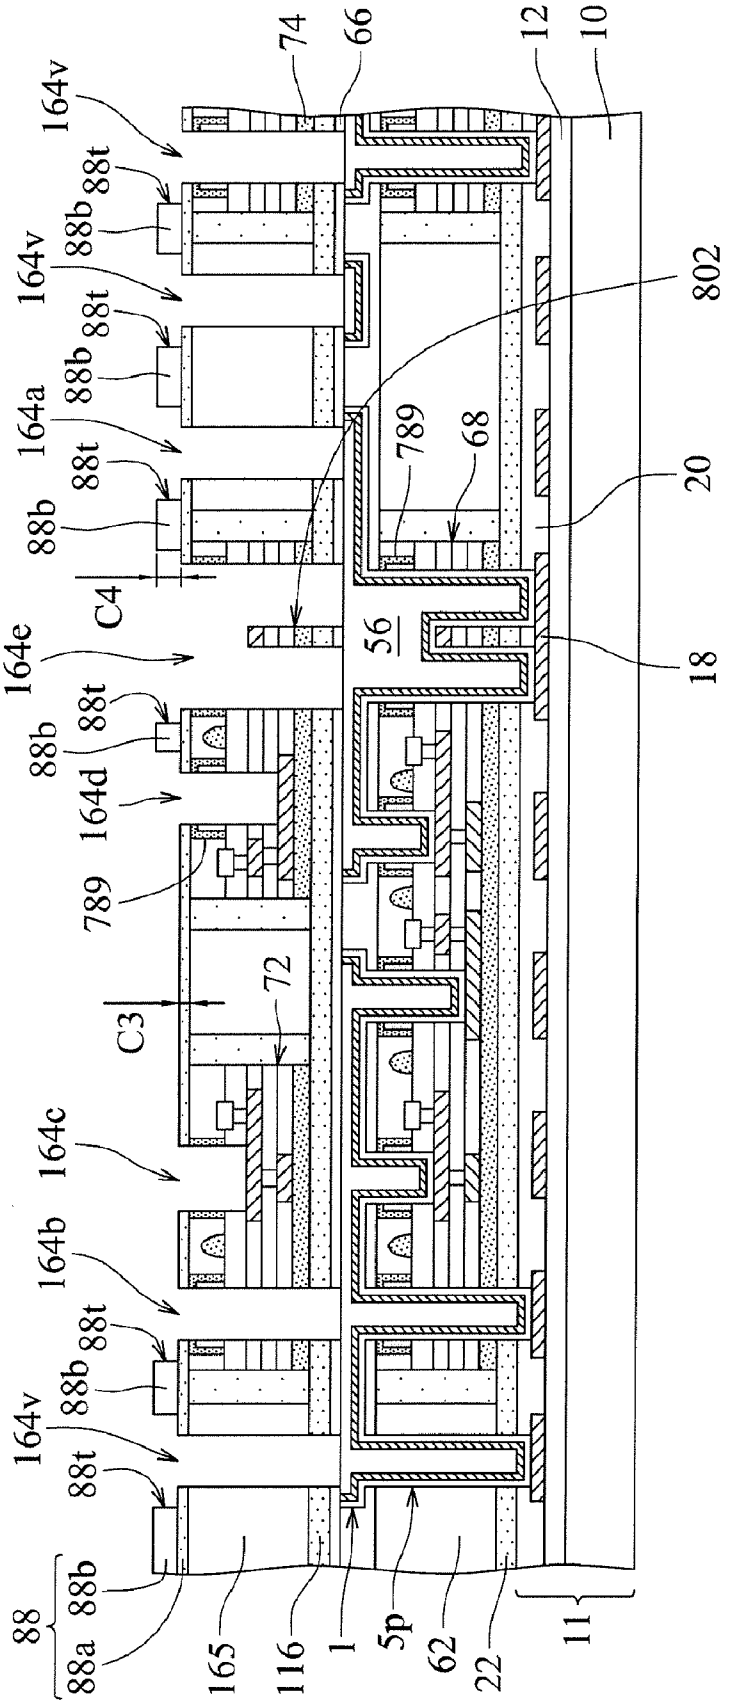

74
66
12
10
164v
88t
88b
164v
88t
88b
164a
88t
88b
C4
164e
88t
88b
164d
789
C3
72
164c
164b
88t
88b
164v
88t
88
88b
88a
165
116
1
5p
62
22
11
802
789
68
20
56
18

Fig. 237

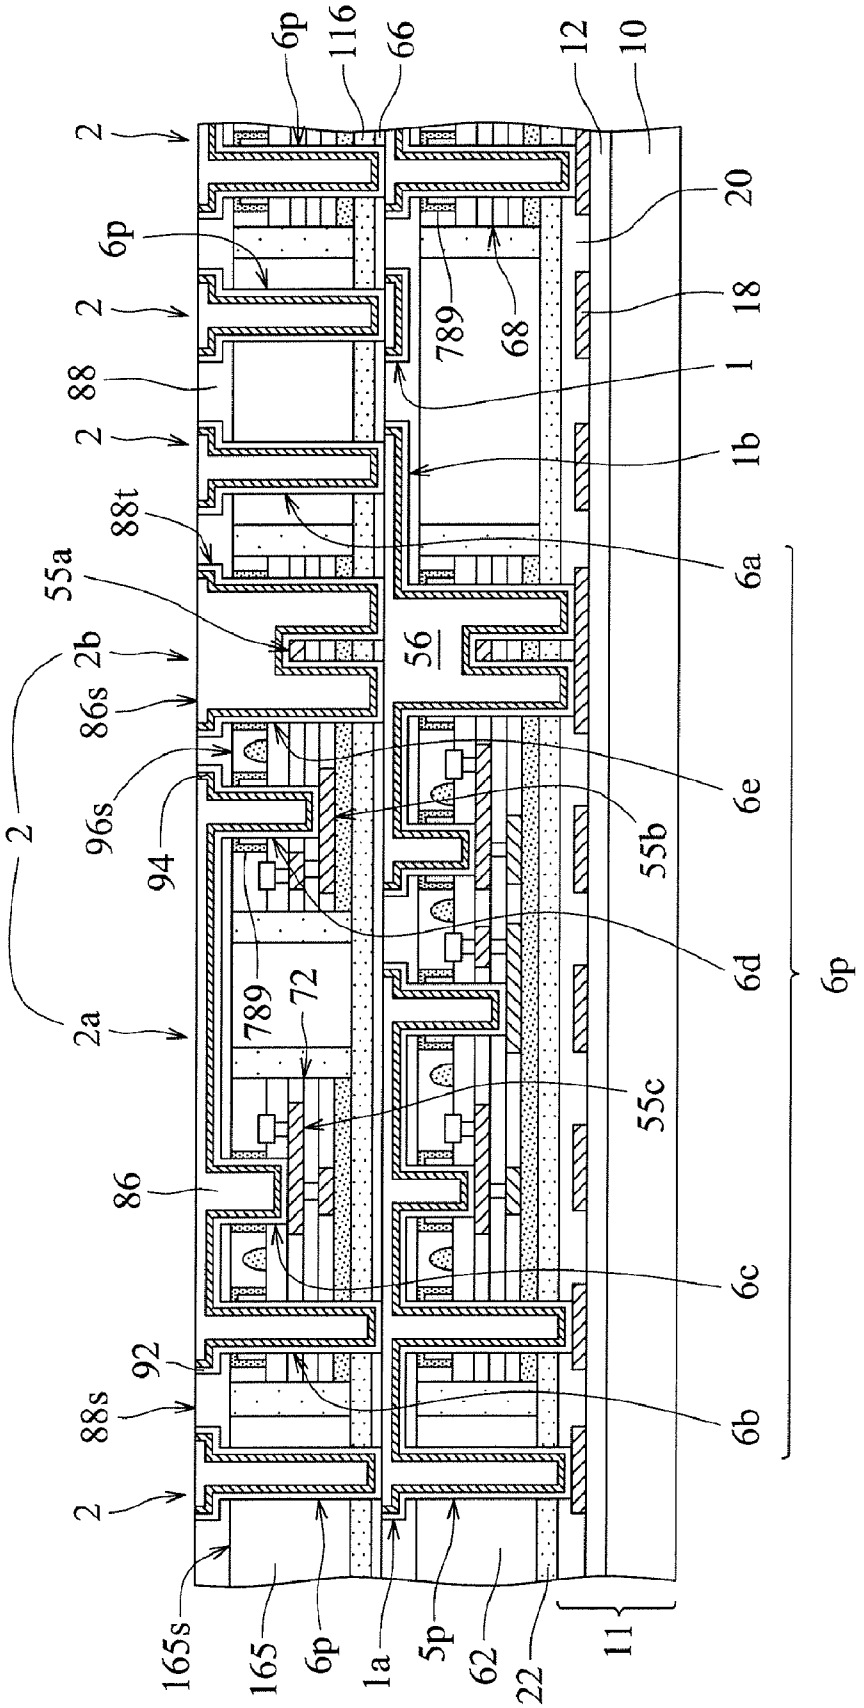

6p
116
66
12
10
2
20
6p
789
68
2
18
88
1
2
1b
88t
6a
55a
56
2b
86s
96s
94
6e
55b
2
789
72
6d
6p
2a
55c
86
6c
92
88s
6b
2
165s
165
6p
1a
5p
62
22
11

Fig. 238

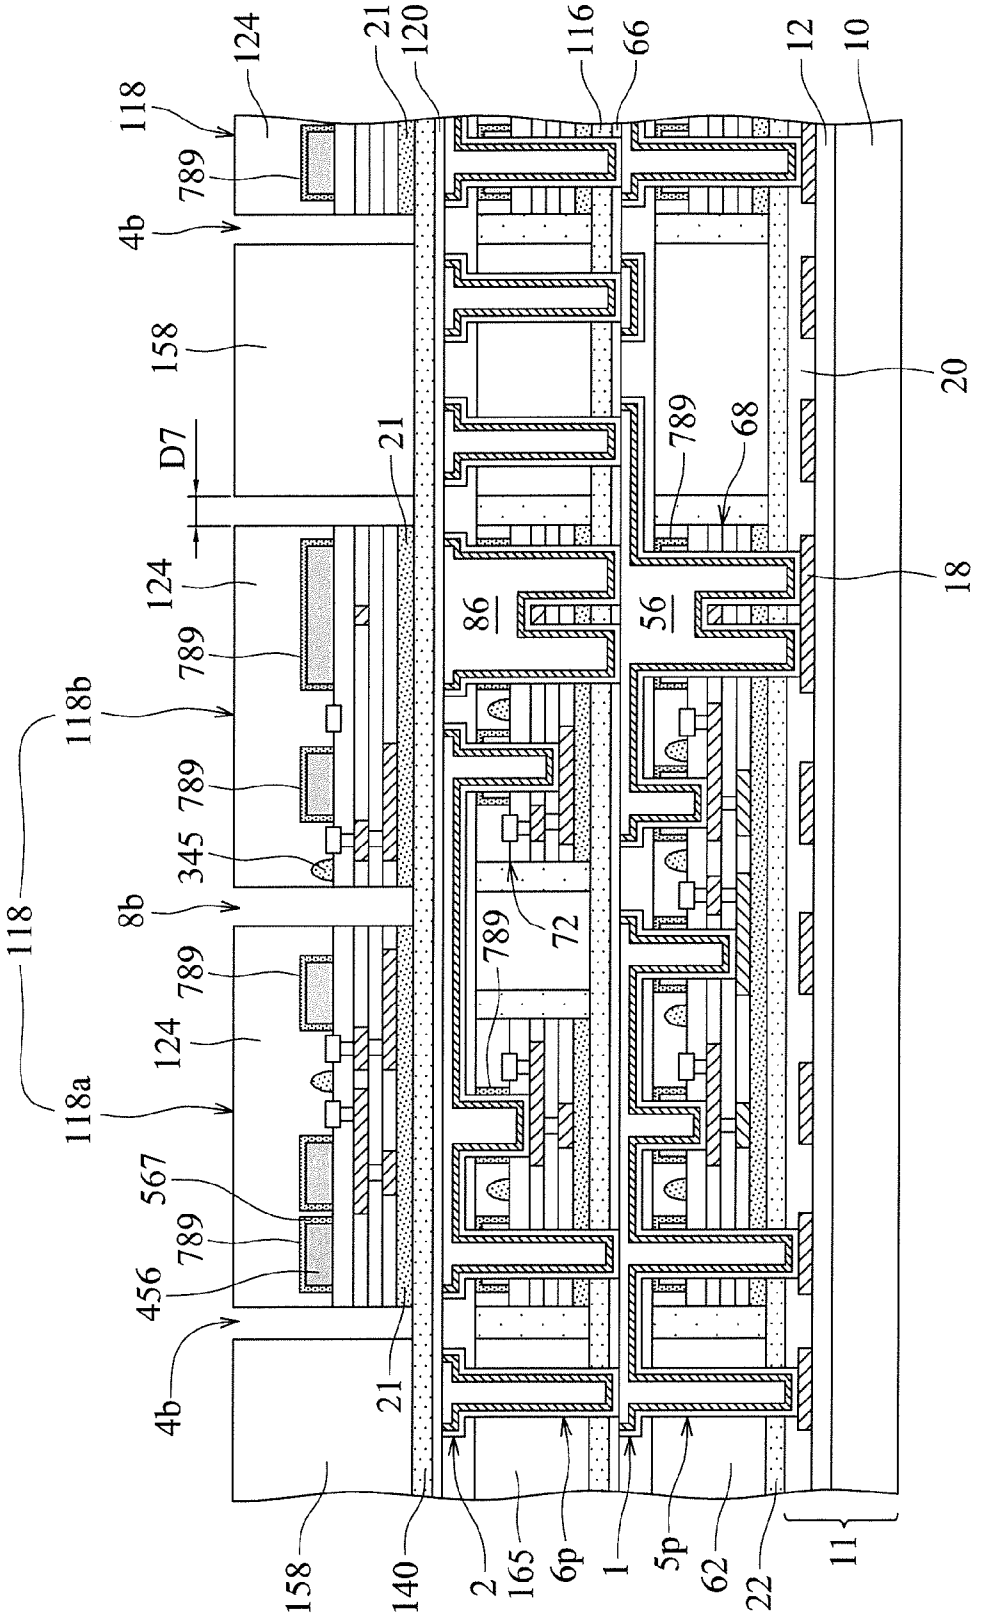

124
21
120
116
66
12
10
118
789
4b
158
D7
21
789
68
20
124
18
86
56
789
118b
789
345
8b
789
72
118
789
124
118a
567
789
456
4b
21
158
140
2
165
6p
1
5p
62
22
11

Fig. 239

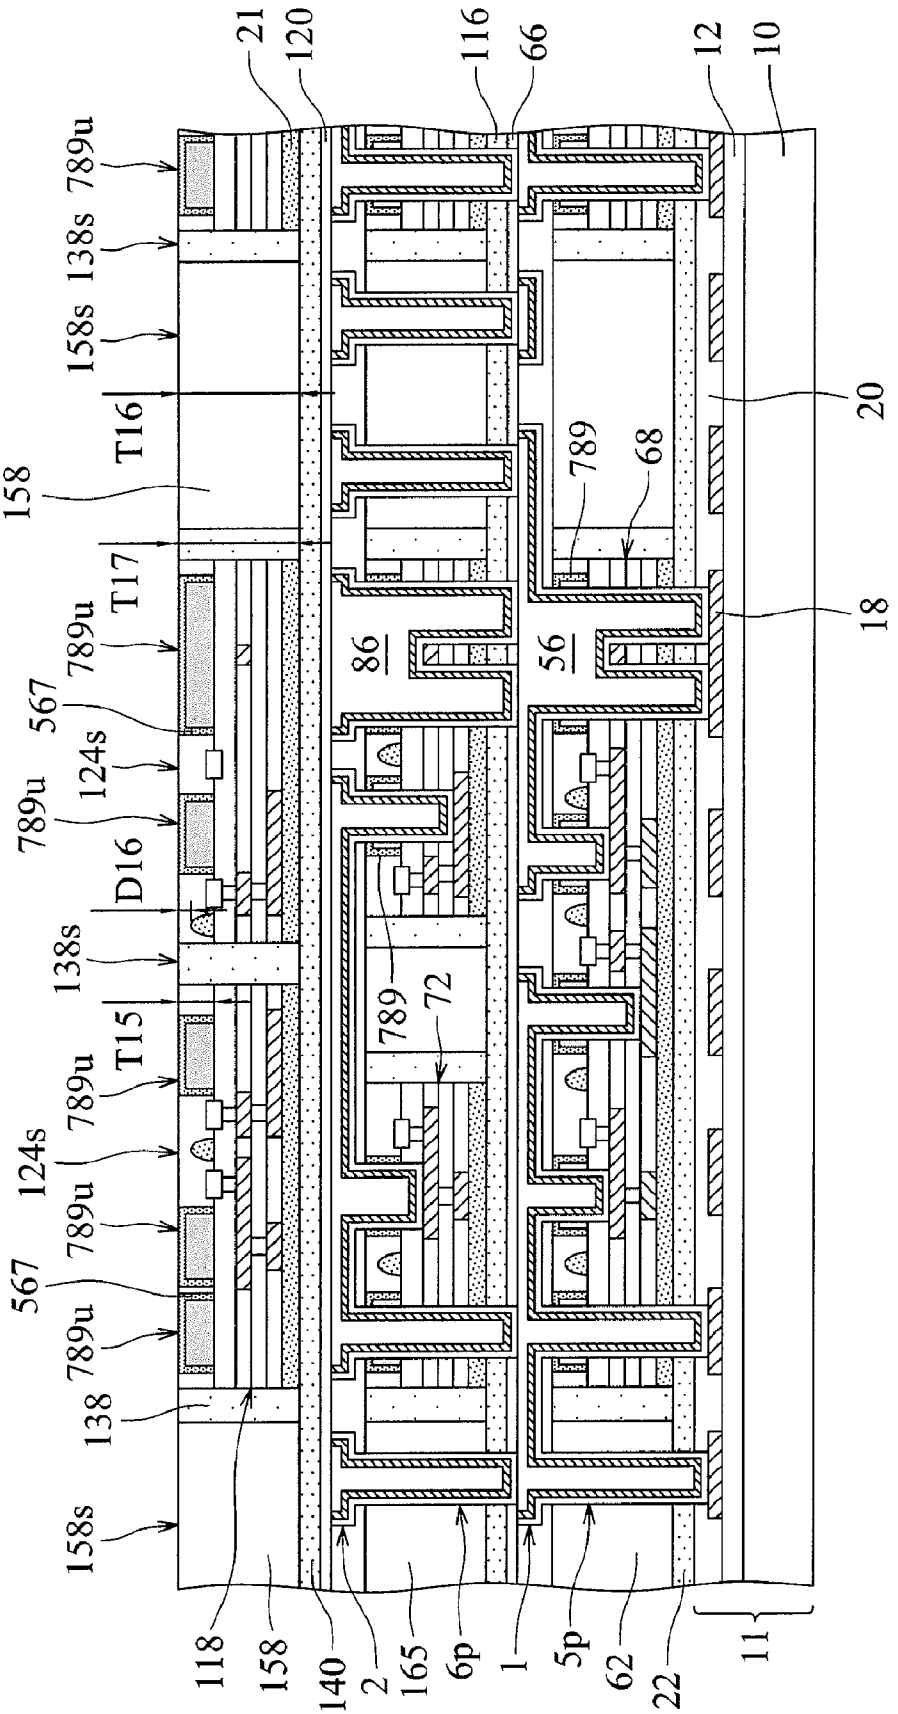

21
120
116
66
12
10
789u
138s
158s
T16
158
T17
789u
567
124s
789u
D16
138s
T15
789u
124s
789u
567
789u
138
158s
20
789
68
18
86
56
789
72
118
158
140
2
165
6p
1
5p
62
22
11

Fig. 240

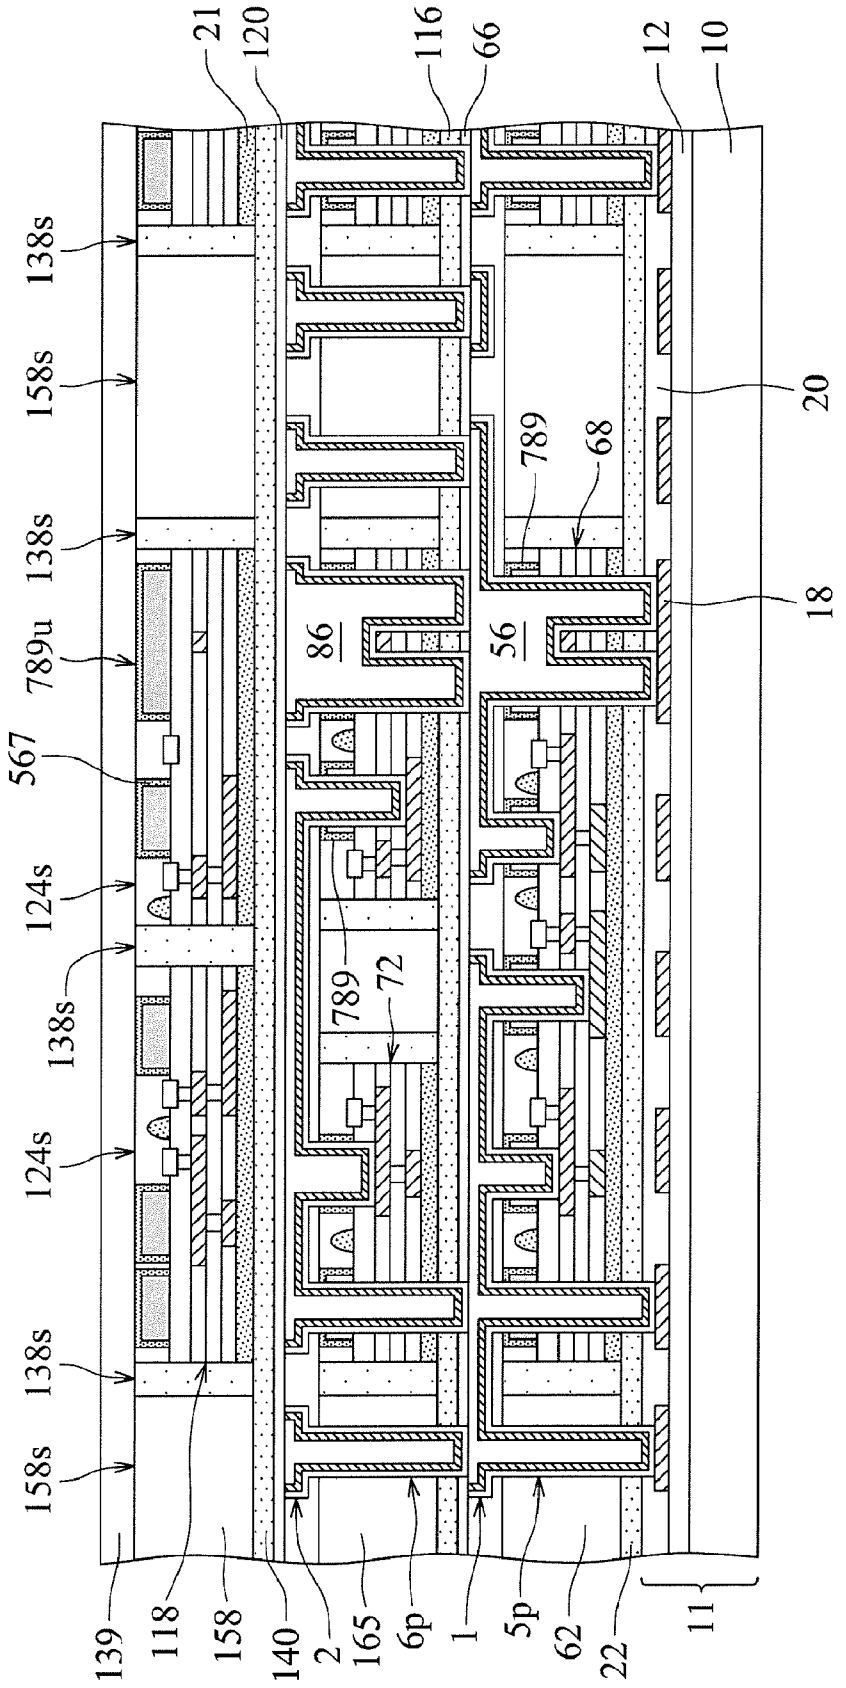

21
120
116
66
12
10
138s
158s
138s
789u
567
124s
138s
124s
138s
158s
20
789
68
18
86
56
789
72
139
118
158
140
2
165
6p
1
5p
62
22
11

Fig. 241

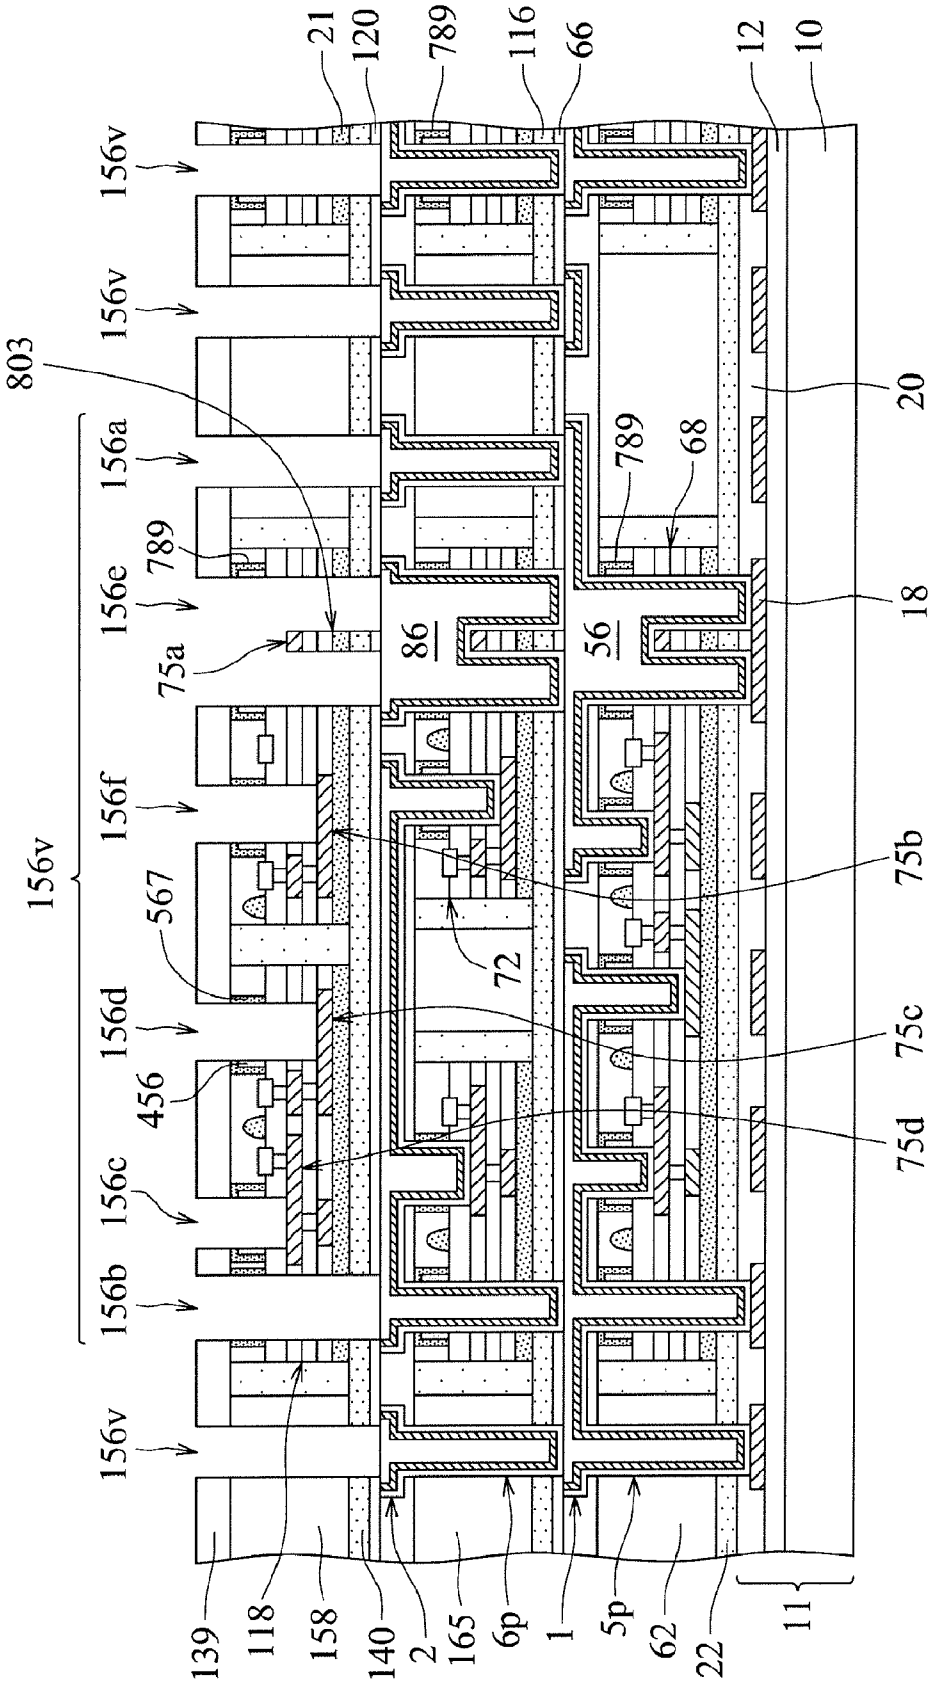

21
120
789
116
66
12
10
156v
803
20
156a
789
68
18
156e
75a
86
56
156f
75b
567
72
156d
75c
456
75d
156c
156b
139
118
158
140
2
165
6p
1
5p
62
22
11

Fig. 242

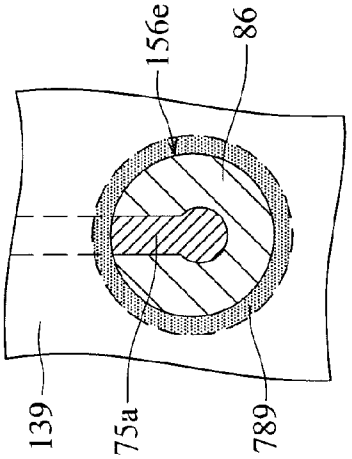


Fig. 245

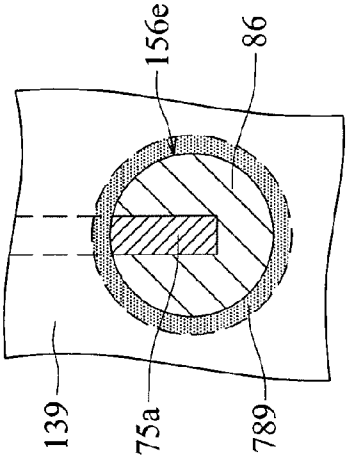


Fig. 244

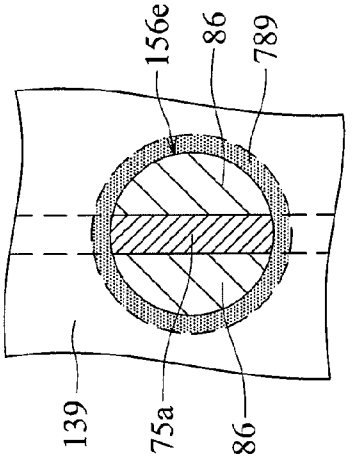


Fig. 243

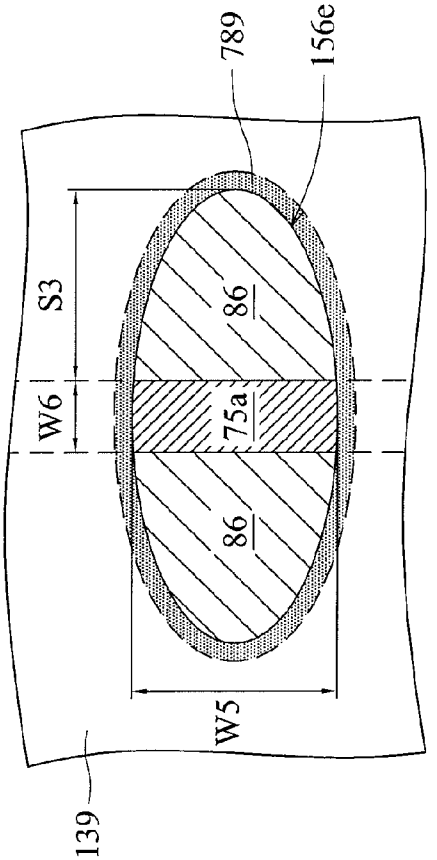


Fig. 246

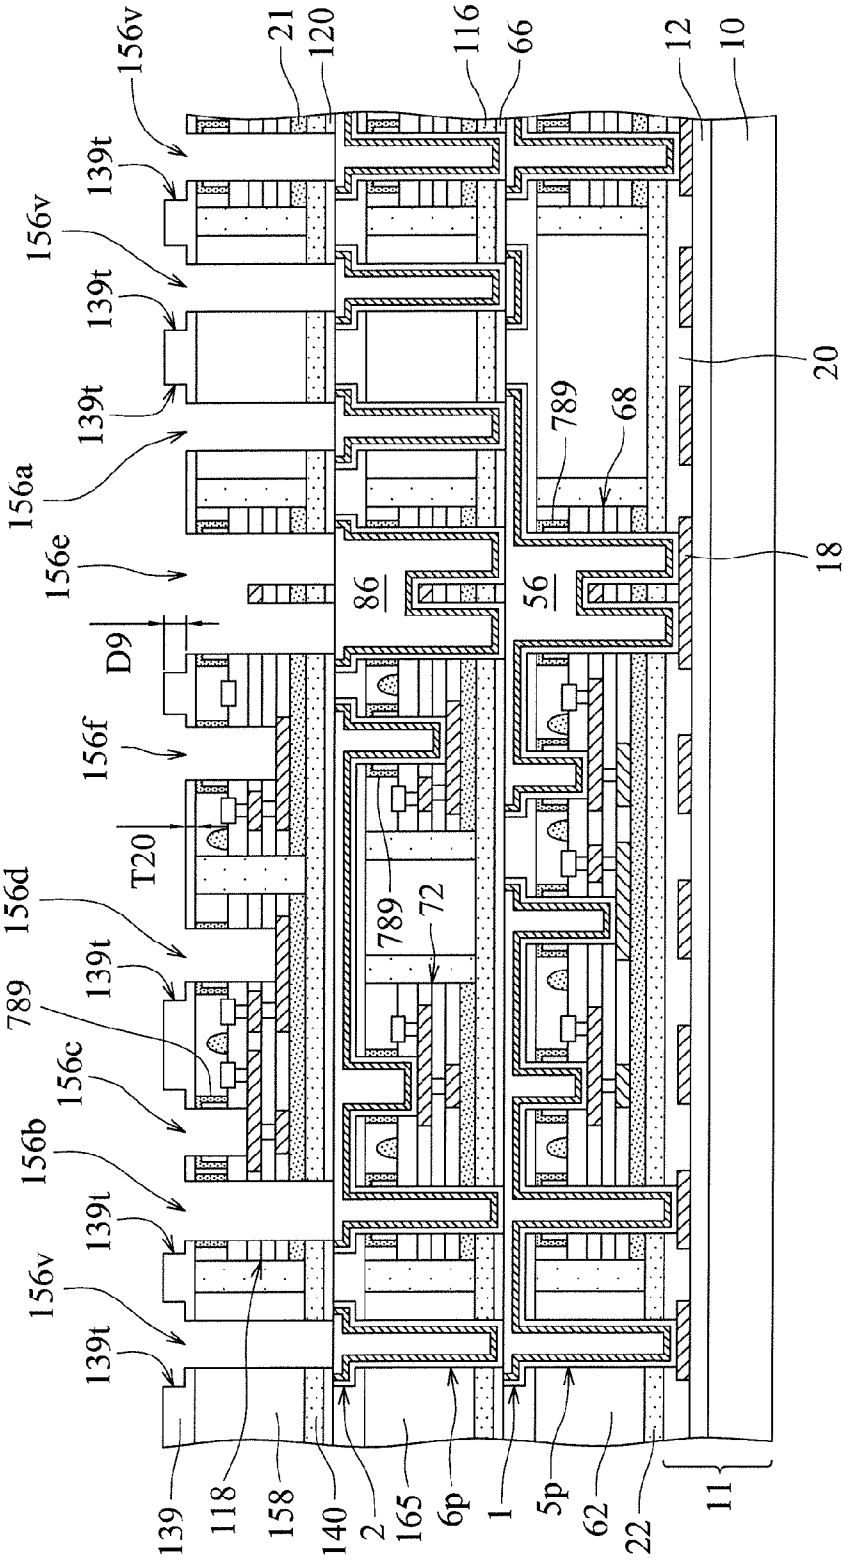

156v
139t
156v
139t
139t
156a
156e
D9
156f
T20
156d
139t
789
156c
156b
139t
156v
139t
139
118
158
140
2
165
6p
1
5p
62
22
11
21
120
116
66
12
10
20
789
68
18
86
56
789
72

Fig. 247

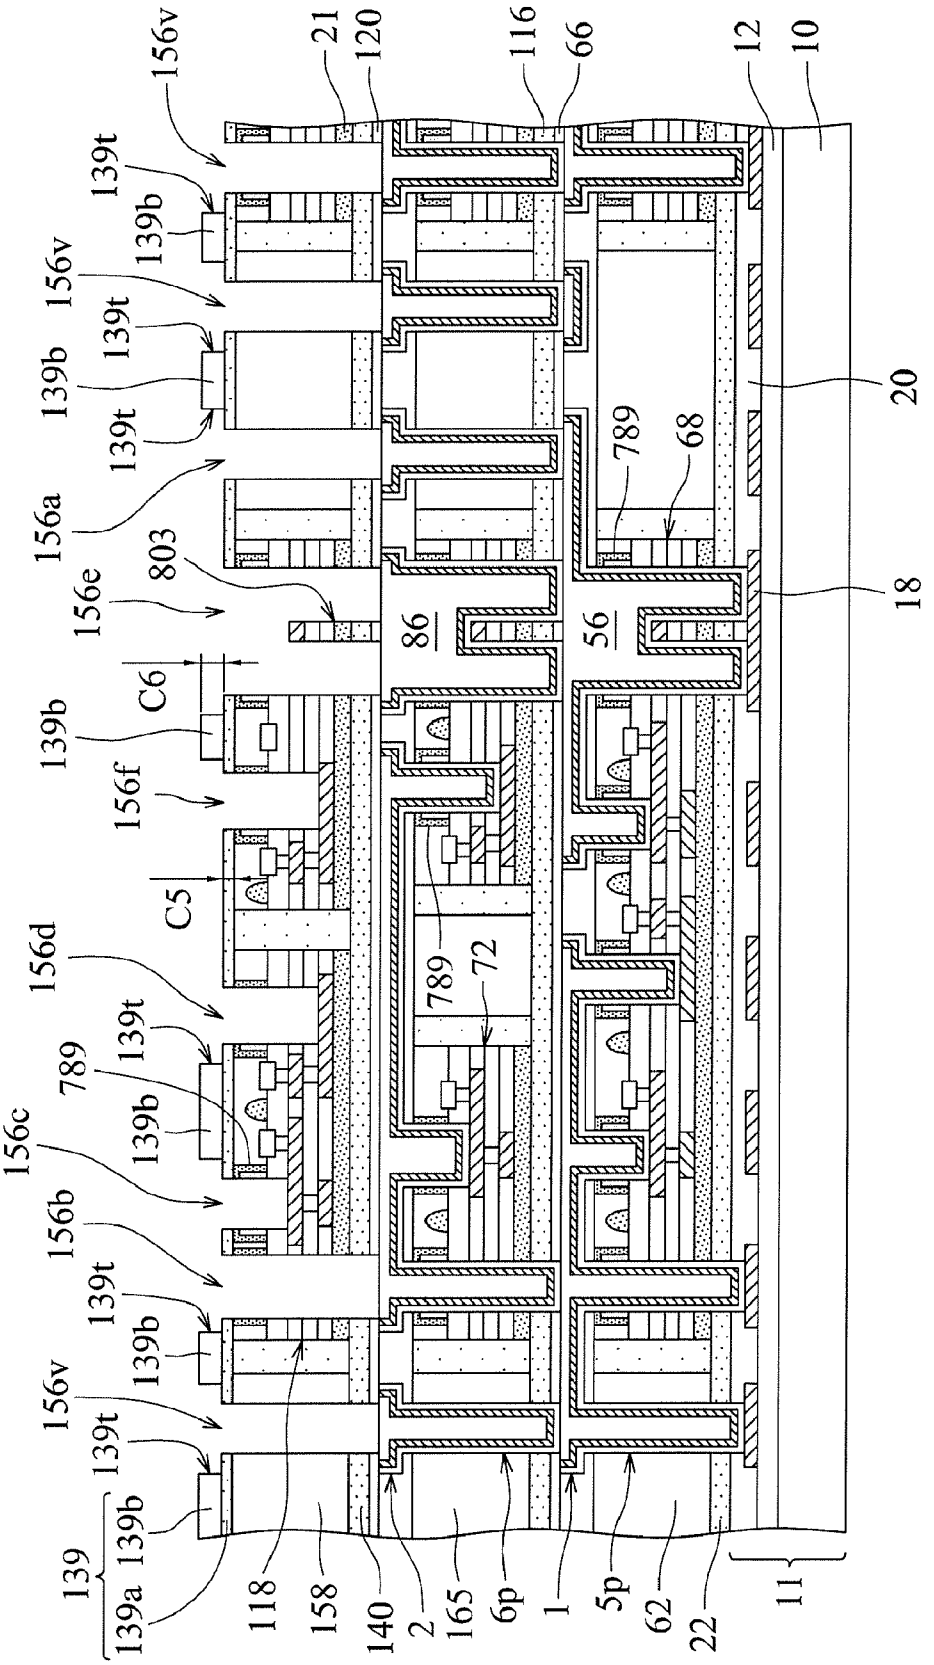

156v
21
120
116
66
12
10
139t
139b
156v
139t
139b
139t
156a
803
156e
C6
139b
156f
C5
156d
789
139t
139b
156c
156b
139t
139b
156v
139t
139b
139
139a
118
158
140
2
165
6p
1
5p
62
22
11
20
789
68
18
86
56
72

Fig. 248

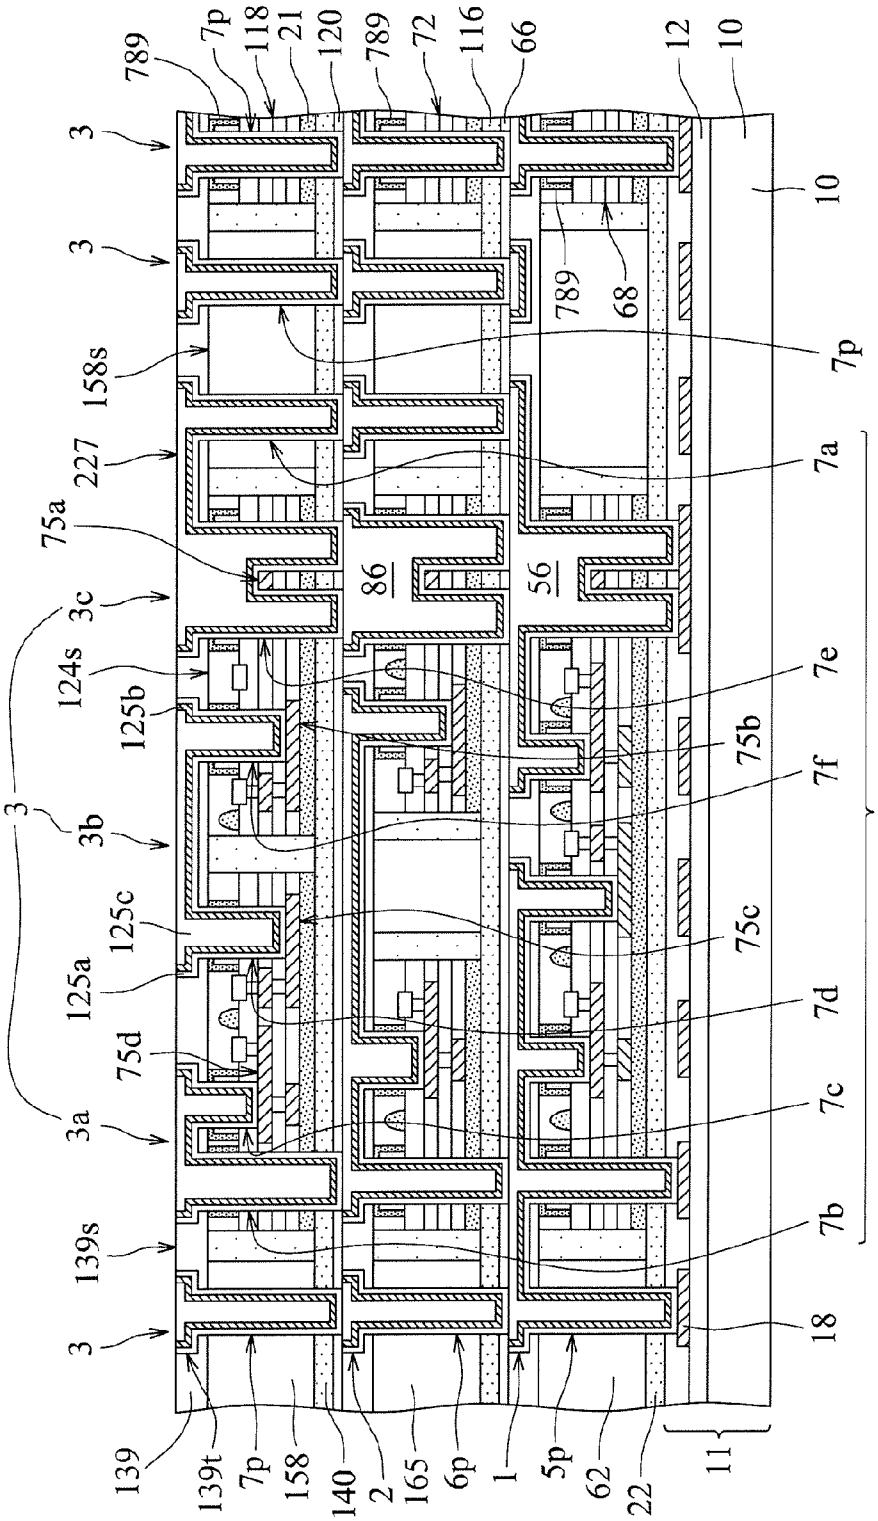

789
7p
118
21
120
789
72
116
66
12
10
3
3
3
158s
227
75a
3c
124s
125b
3
3b
125c
125a
75d
3a
139s
3
139
139t
7p
158
140
2
165
6p
1
5p
62
22
11
18
7b
7c
7d
7f
7e
7a
7p
75b
75c
86
56
789
68
10
7p

Fig. 249

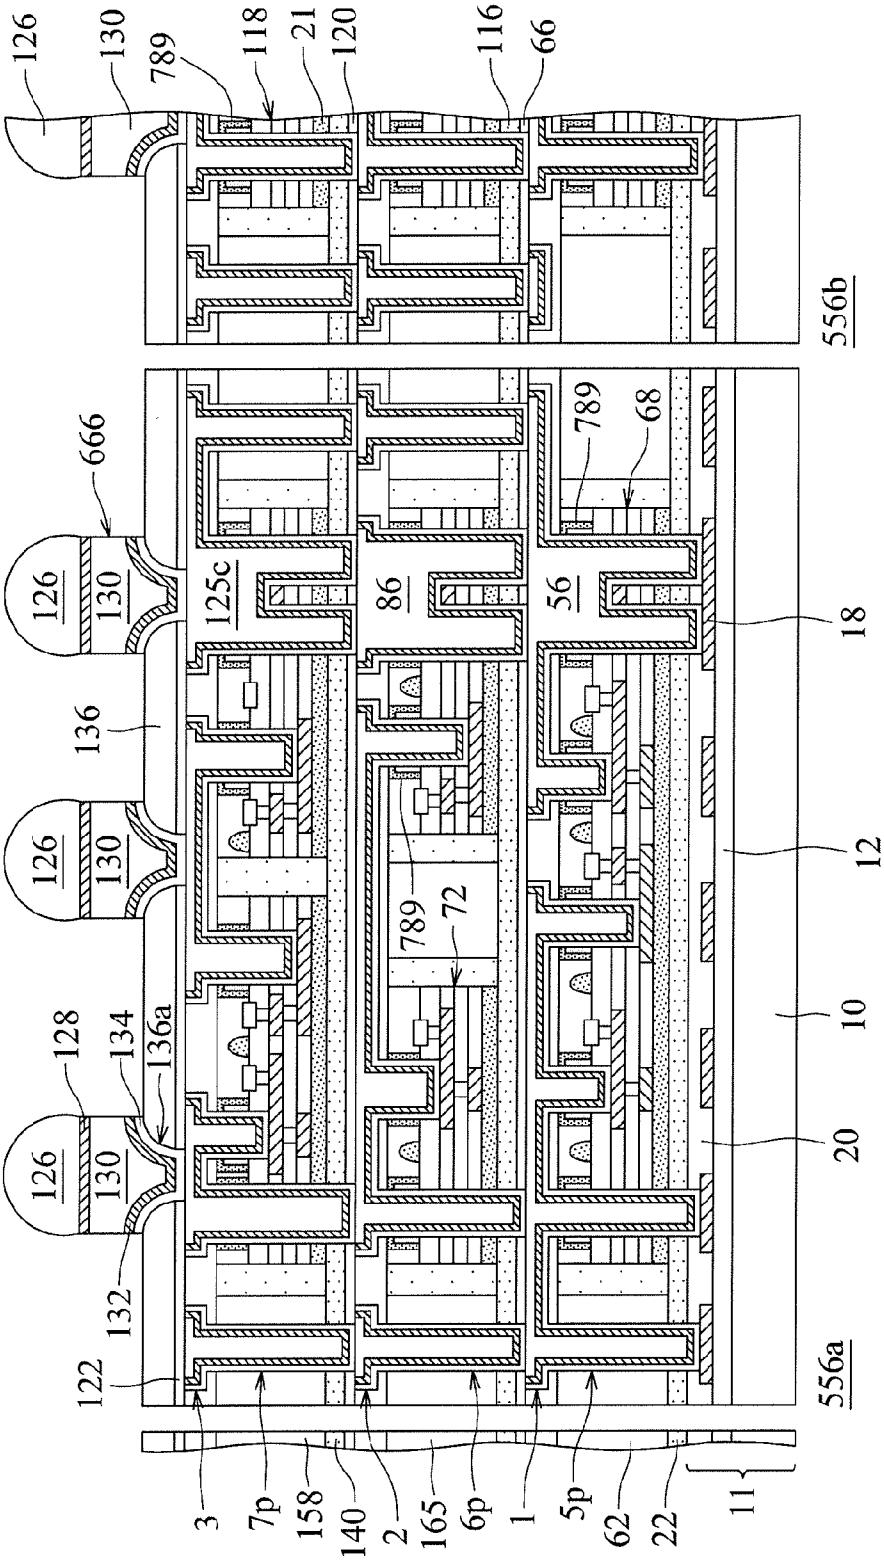

126
130
789
118
21
120
116
66
556b
666
789
68
126
130
125c
86
56
18
136
126
130
789
72
12
128
134
136a
10
126
130
20
132
122
556a
3
7p
158
140
2
165
6p
1
5p
62
22
11

Fig. 250

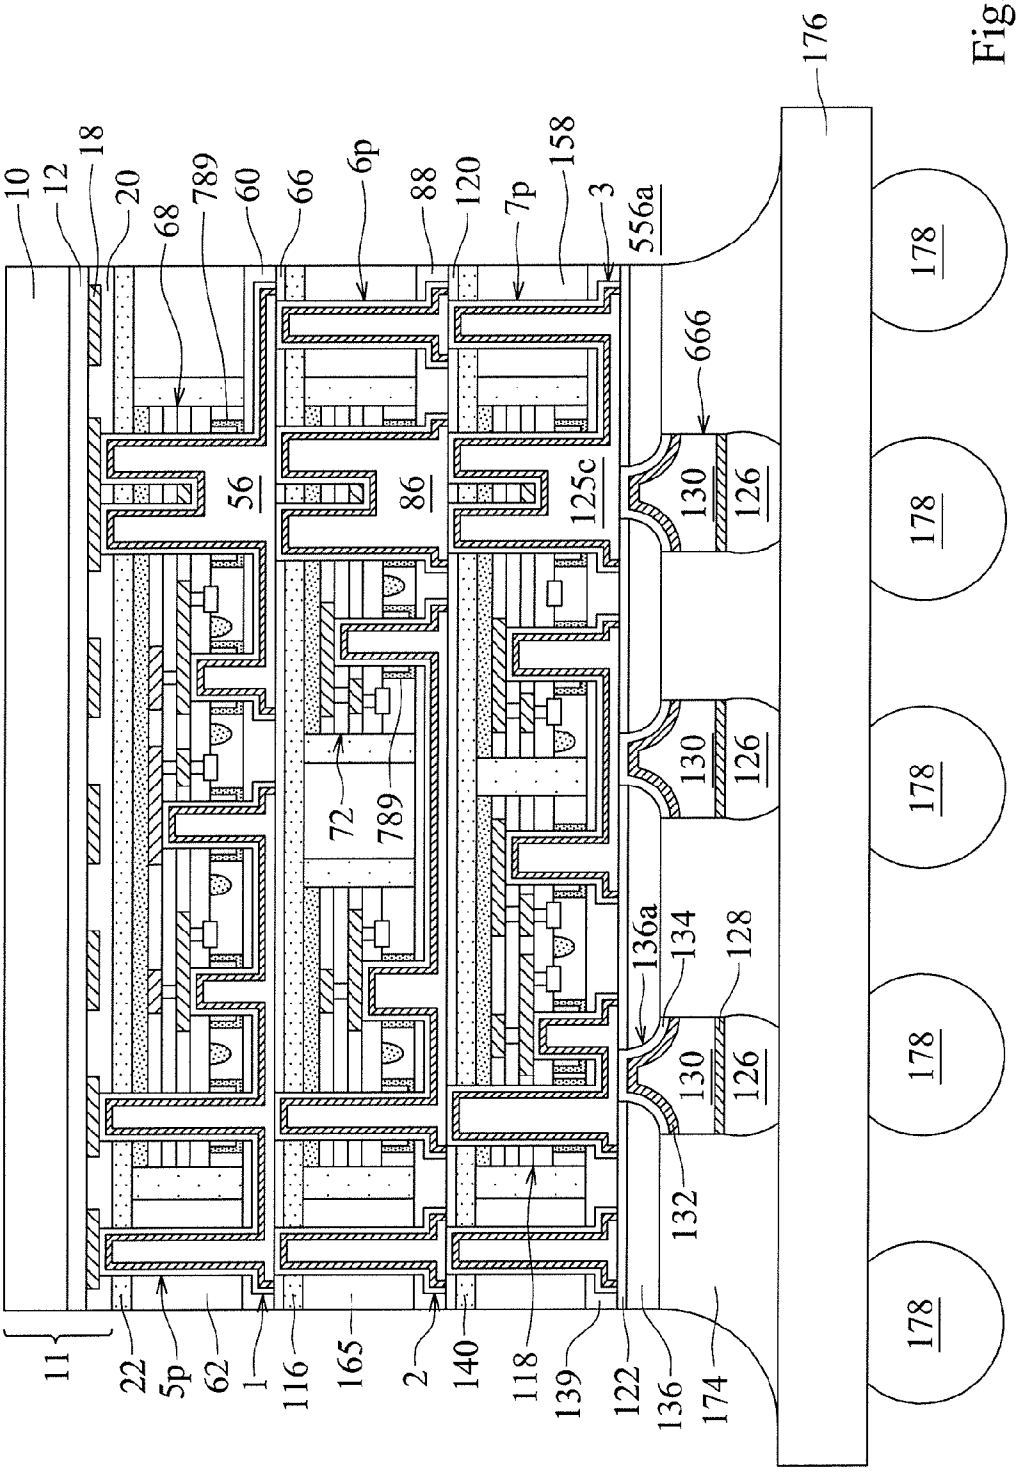

10
12
18
20
68
789
60
66
6p
88
120
7p
158
3
556a
176
178
666
56
86
125c
130
126
72
789
136a
134
128
132
11
22
5p
62
1
116
165
2
140
118
139
122
136
174

Fig. 251

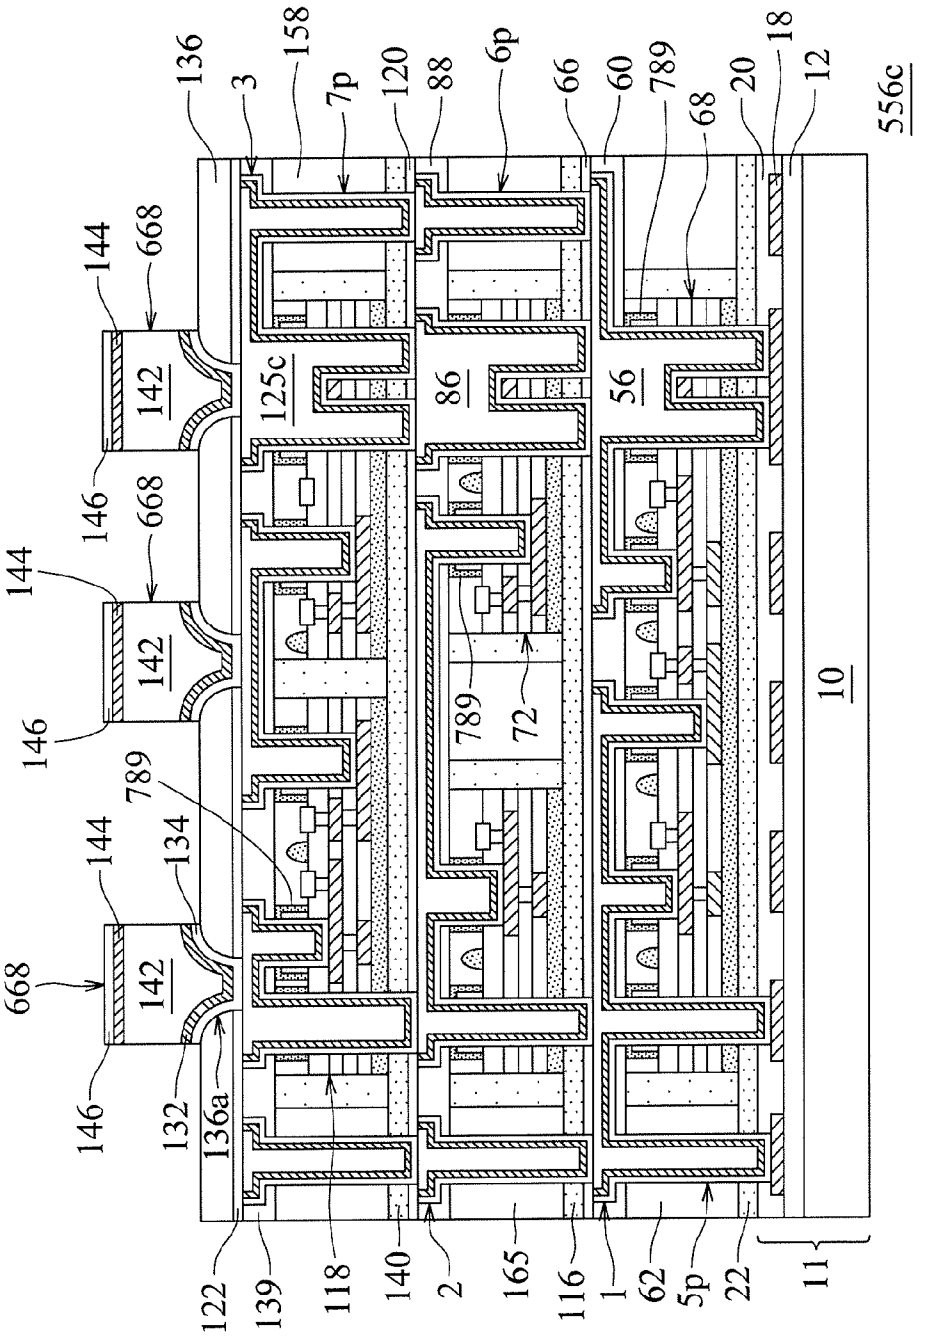

136
3
158
7p
120
88
6p
66
60
789
68
20
18
12
556c
144
668
142
146
125c
86
56
134
132
136a
122
139
118
140
2
165
116
1
62
5p
22
11
10
72

Fig. 252

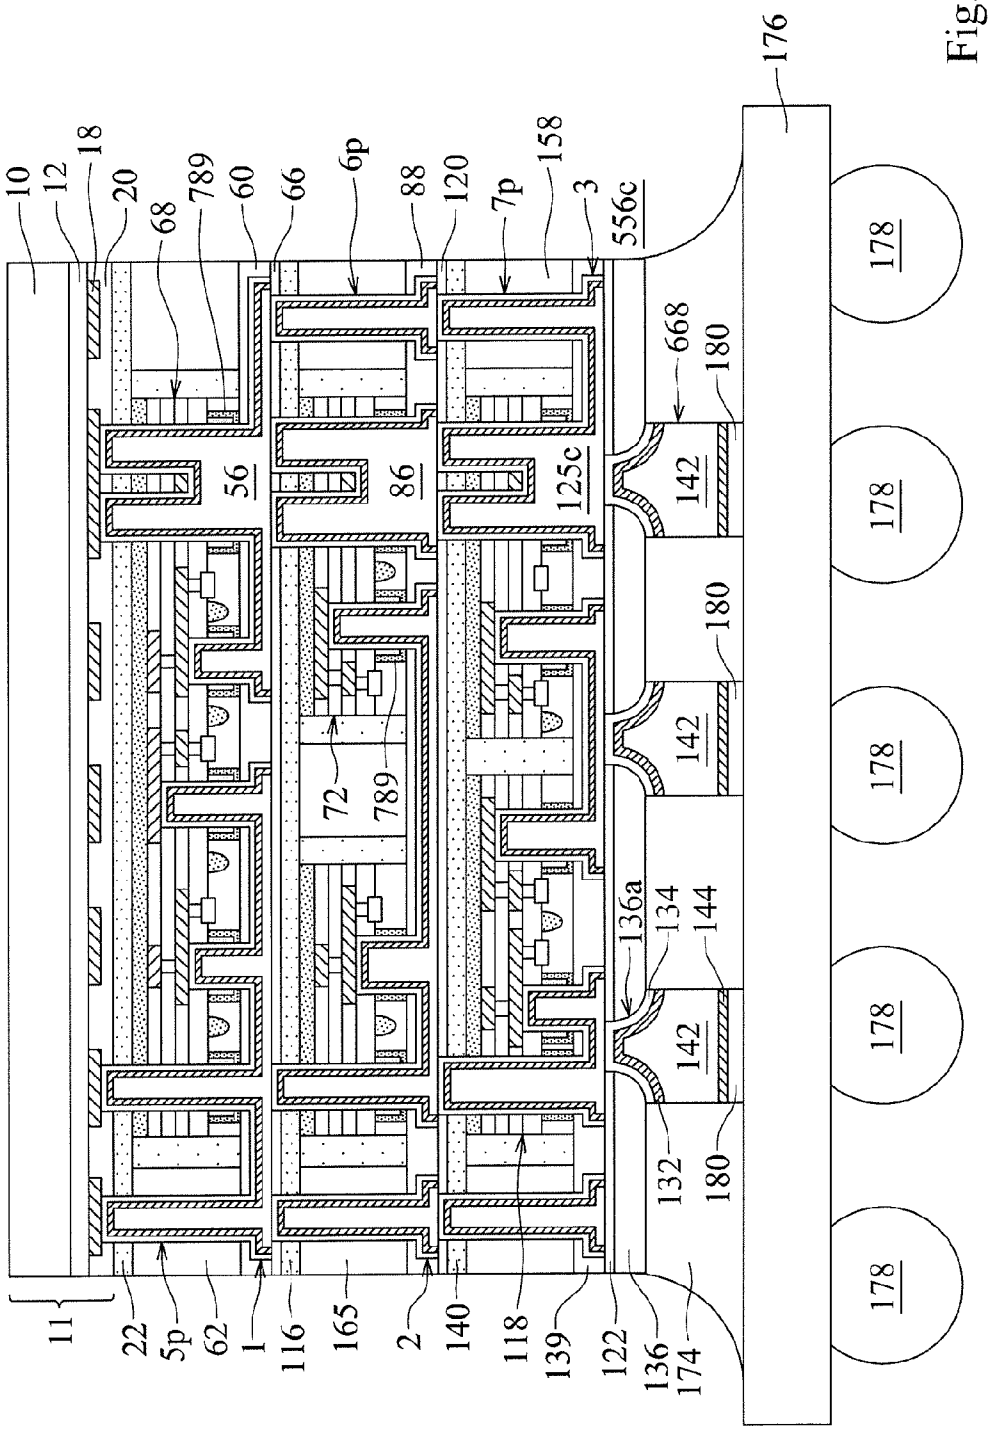

10
12
18
20
68
789
60
66
6p
88
120
7p
158
3
556c
176
668
180
178
56
86
125c
142
72
789
136a
134
144
132
11
22
5p
62
1
116
165
2
140
118
139
122
136
174

Fig. 253

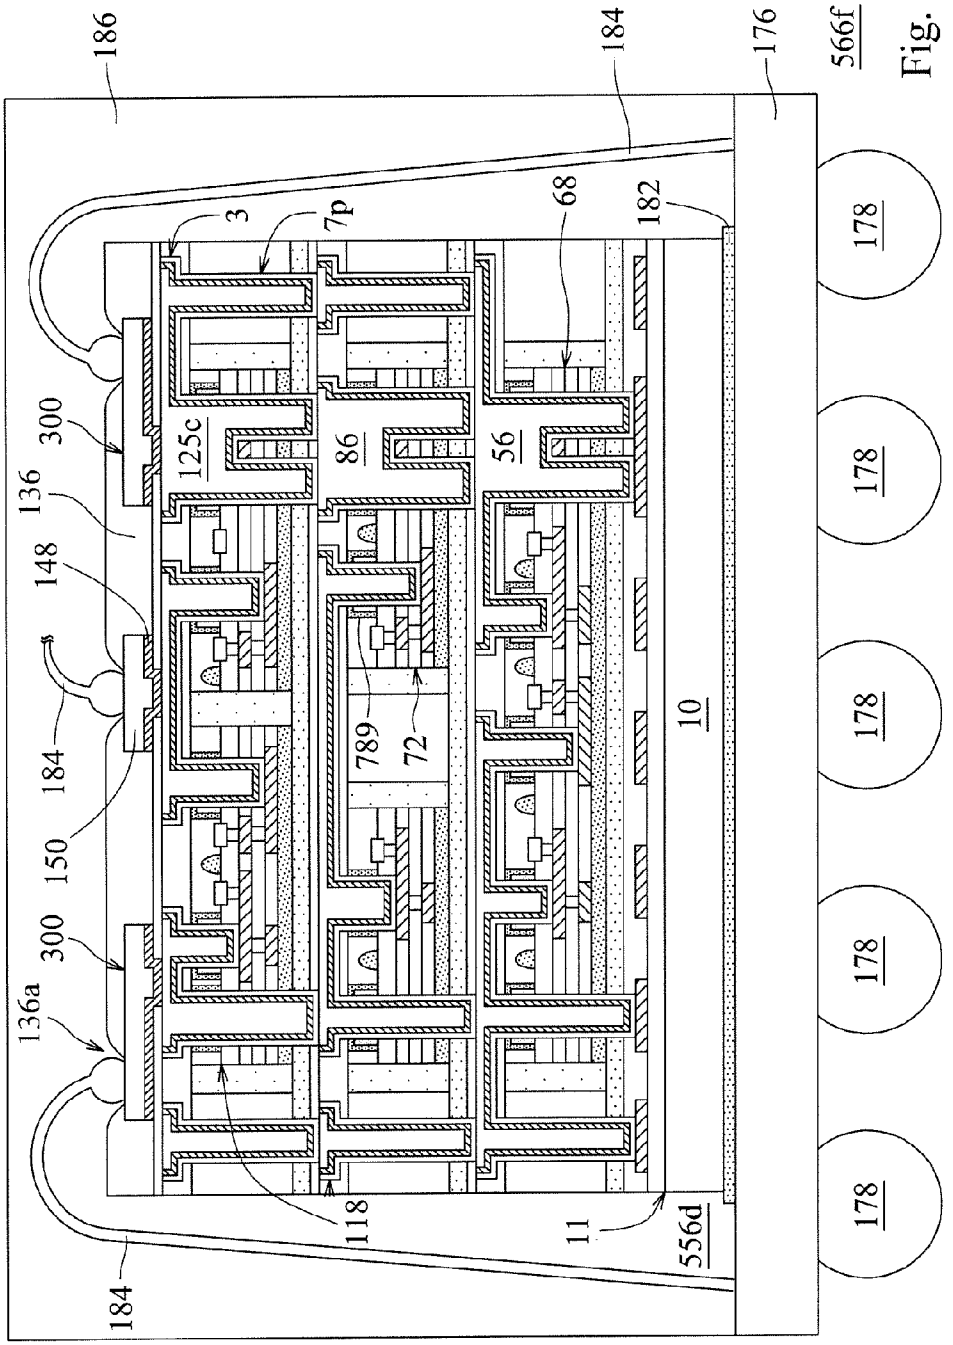

186
184
176
566f
178
3
7p
68
182
300
125c
86
56
136
148
184
150
789
72
10
300
136a
118
11
556d
184

Fig. 254

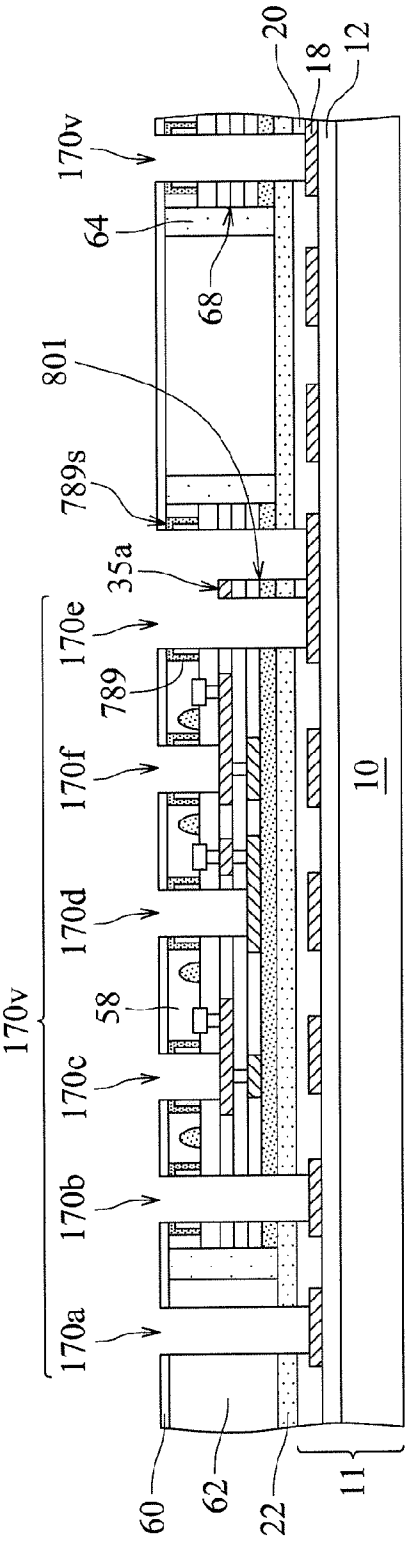


Fig. 255

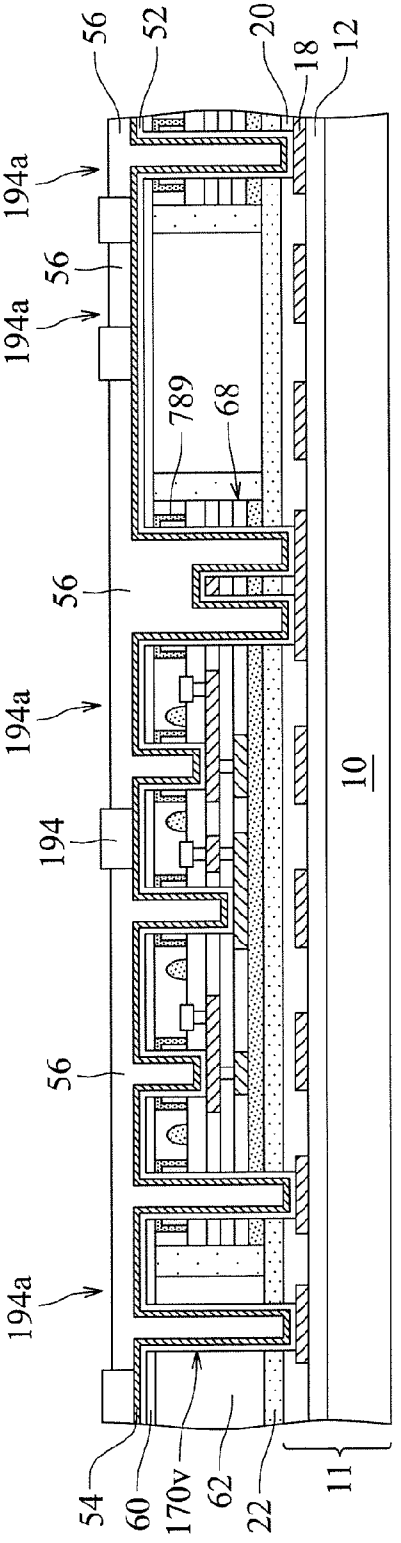


Fig. 256

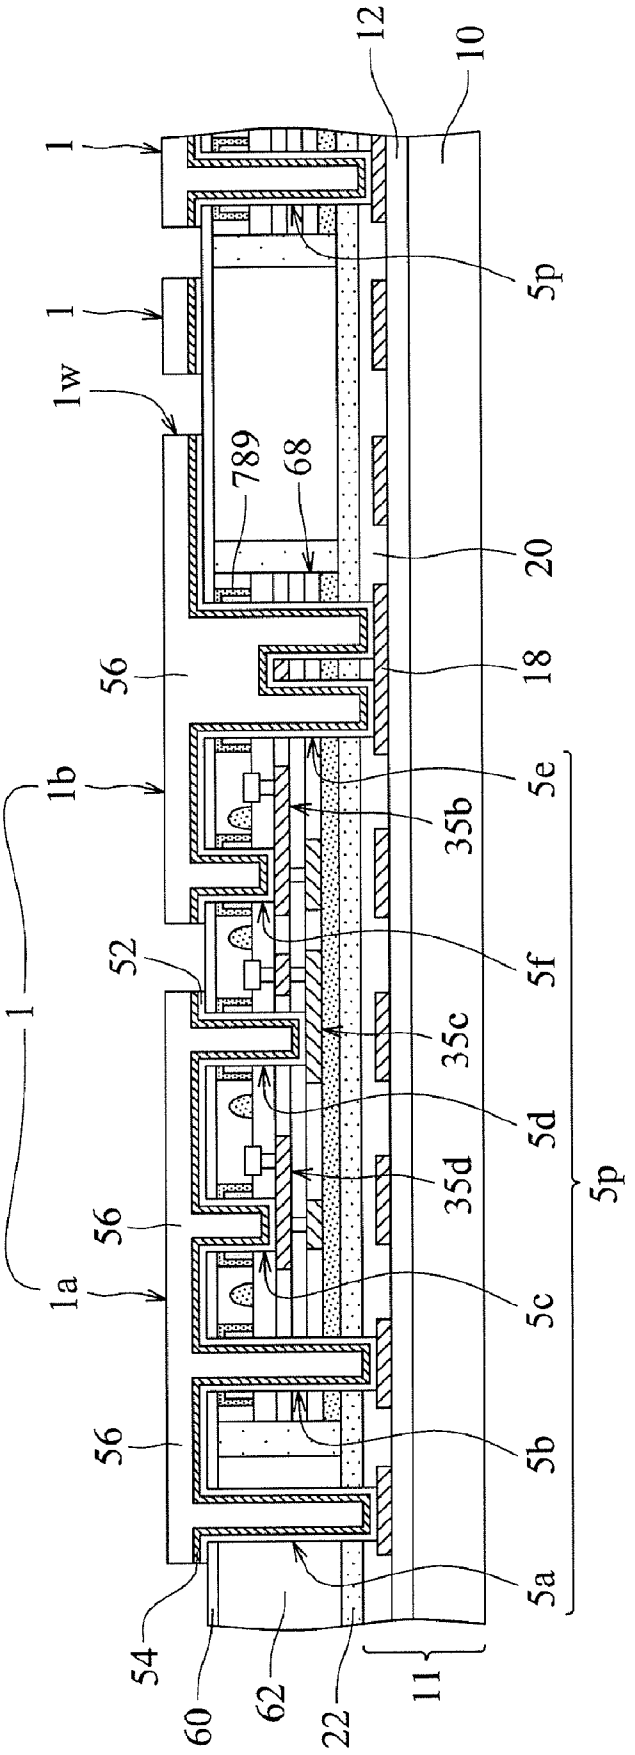

12
10
1
1
1w
789
68
5p
20
18
56
1b
5e
35b
52
5f
1
35c
5d
35d
5p
56
1a
5c
56
5b
5a
54
60
62
22
11

Fig. 257

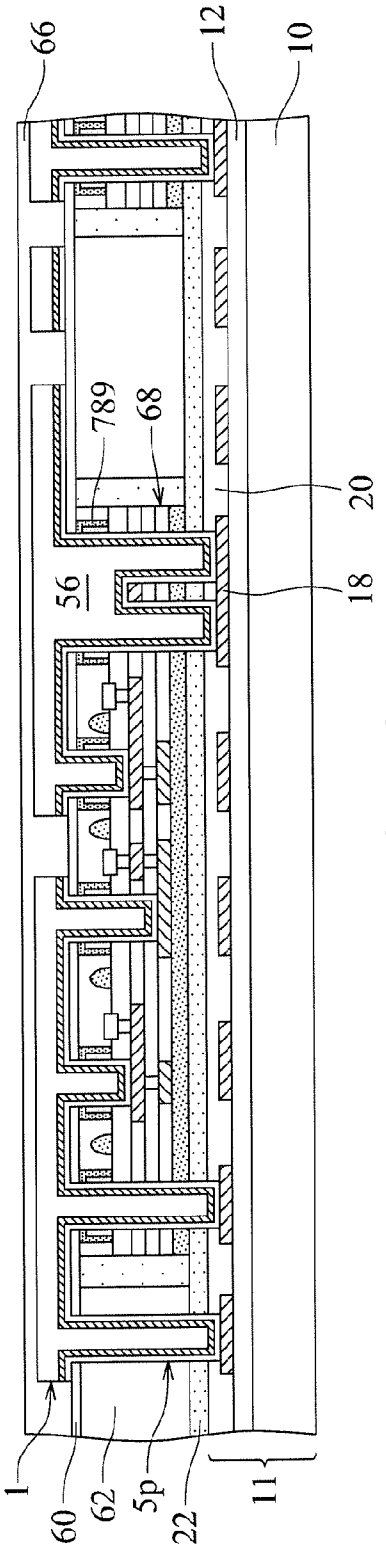


Fig. 258

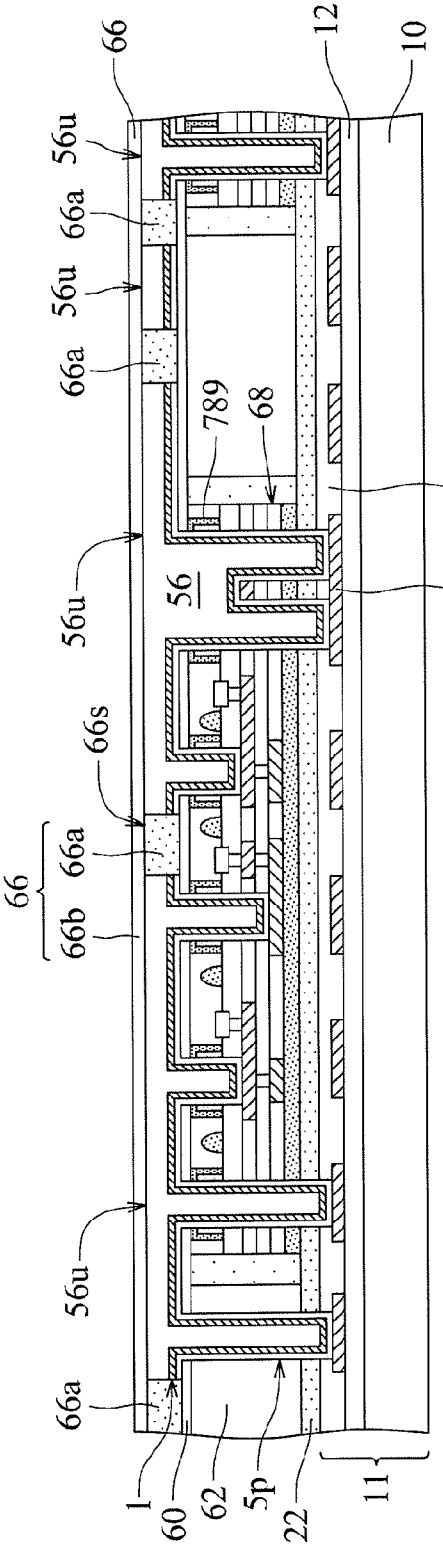


Fig. 259

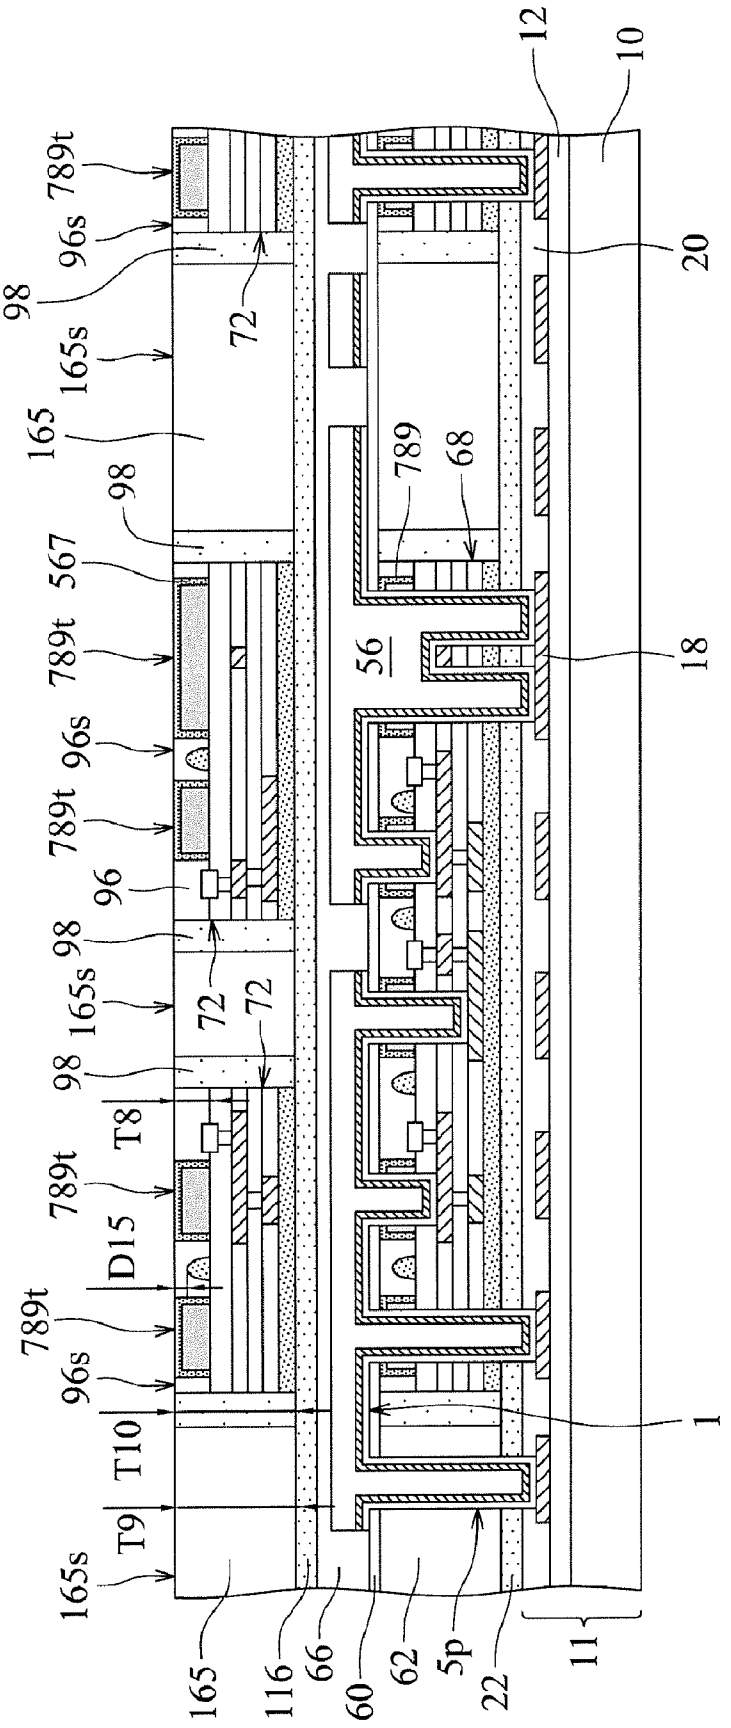

12
10
789t
96s
98
72
165s
165
20
789
68
98
567
789t
56
18
789t
96s
789t
96
98
165s
72
72
98
T8
789t
D15
789t
96s
T10
T9
165s
1
165
116
66
60
62
5p
22
11

Fig. 260

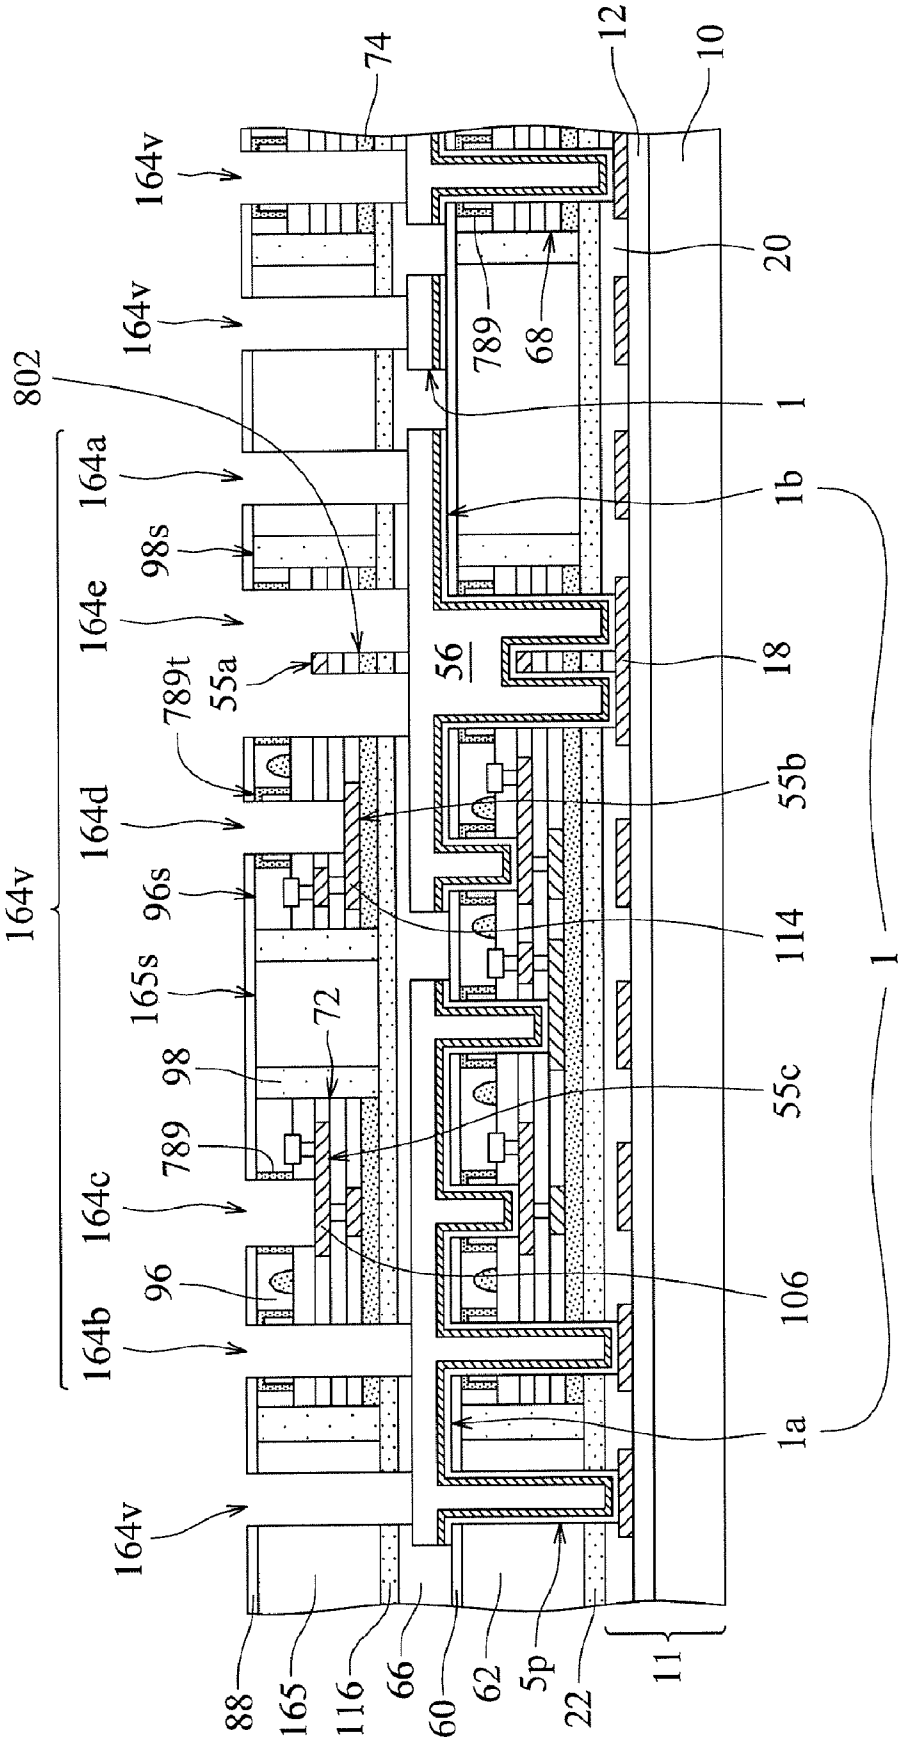

74
12
10
164v
20
789
68
802
1
164a
1b
98s
164e
56
18
789t
55a
164d
55b
96s
114
165s
72
98
55c
789
164c
96
106
164b
1a
88
165
116
66
60
62
5p
22
11

Fig. 261

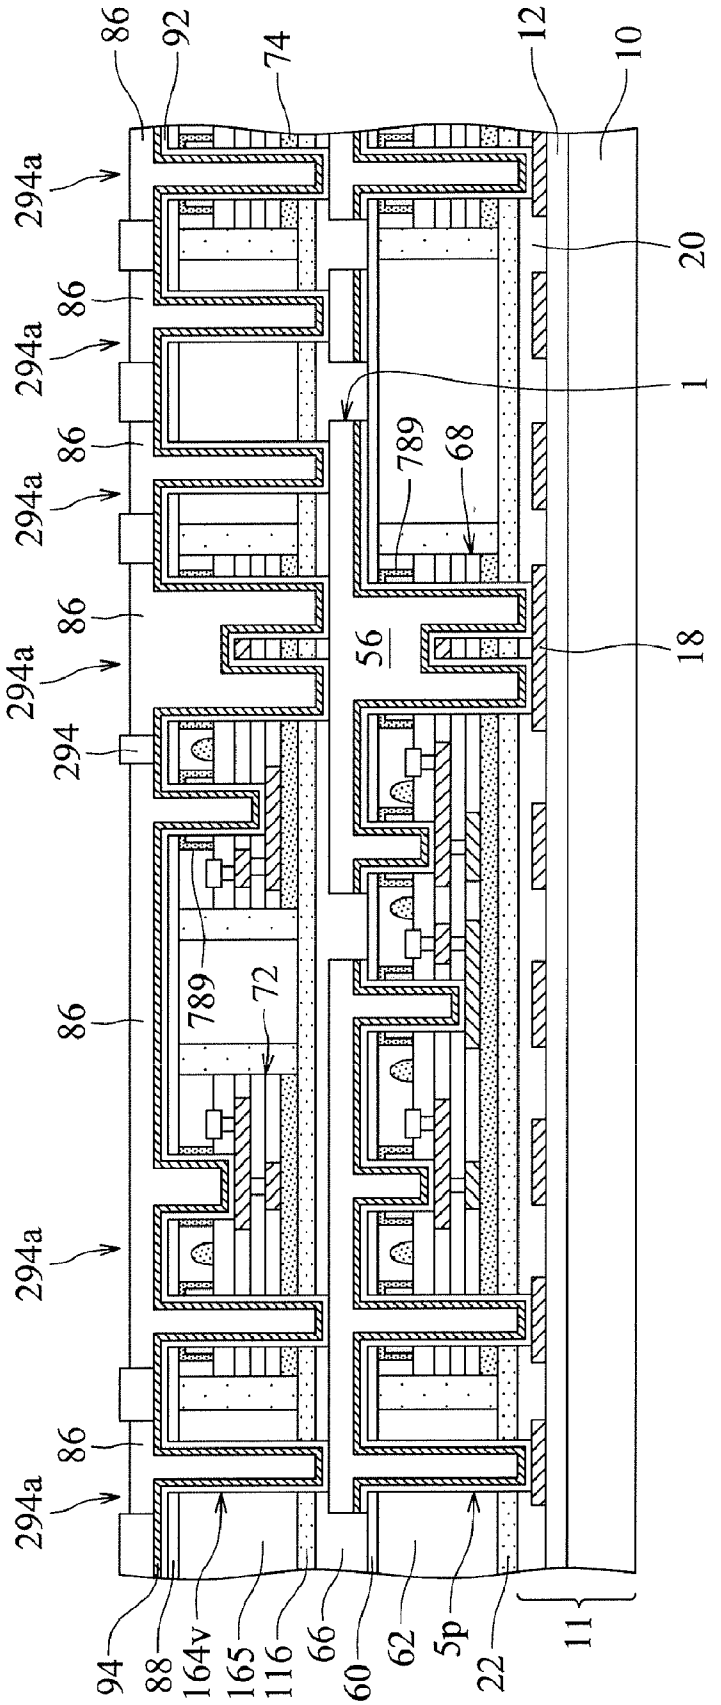

86
92
74
12
10
294a
20
86
294a
1
789
68
86
294a
86
294a
56
18
294
789
72
86
294a
86
294a
94
88
164v
165
116
66
60
62
5p
22
11

Fig. 262

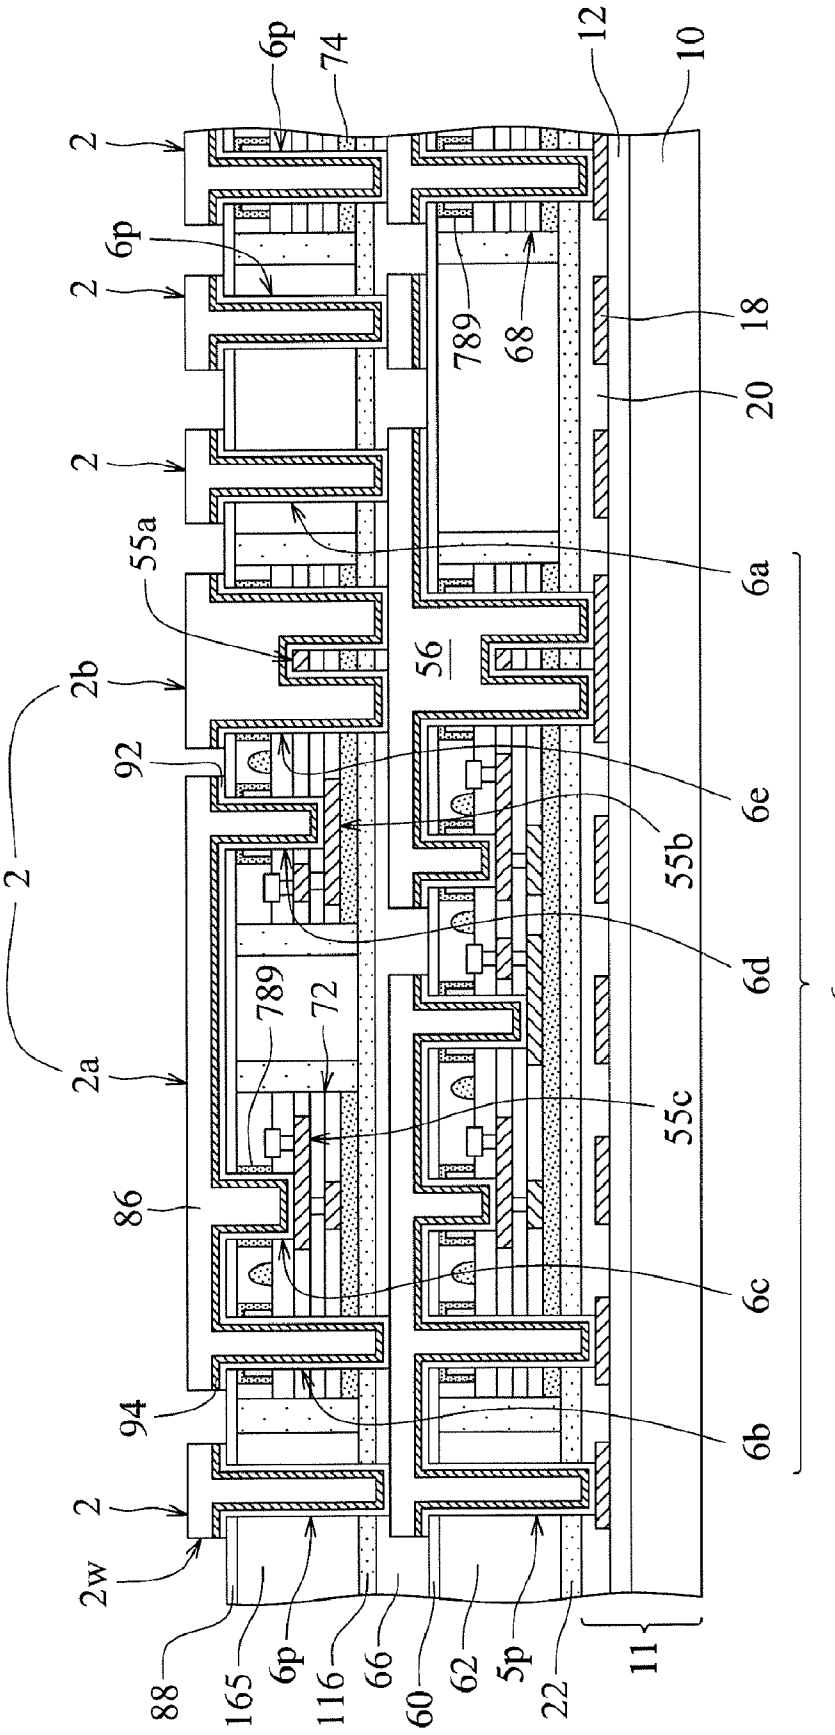

6p
74
12
10
2
6p
2
789
68
18
20
2
55a
6a
2b
56
92
6e
55b
2
6d
789
72
6p
2a
55c
86
6c
94
6b
2
2w
88
165
6p
116
66
60
62
5p
22
11

Fig. 263

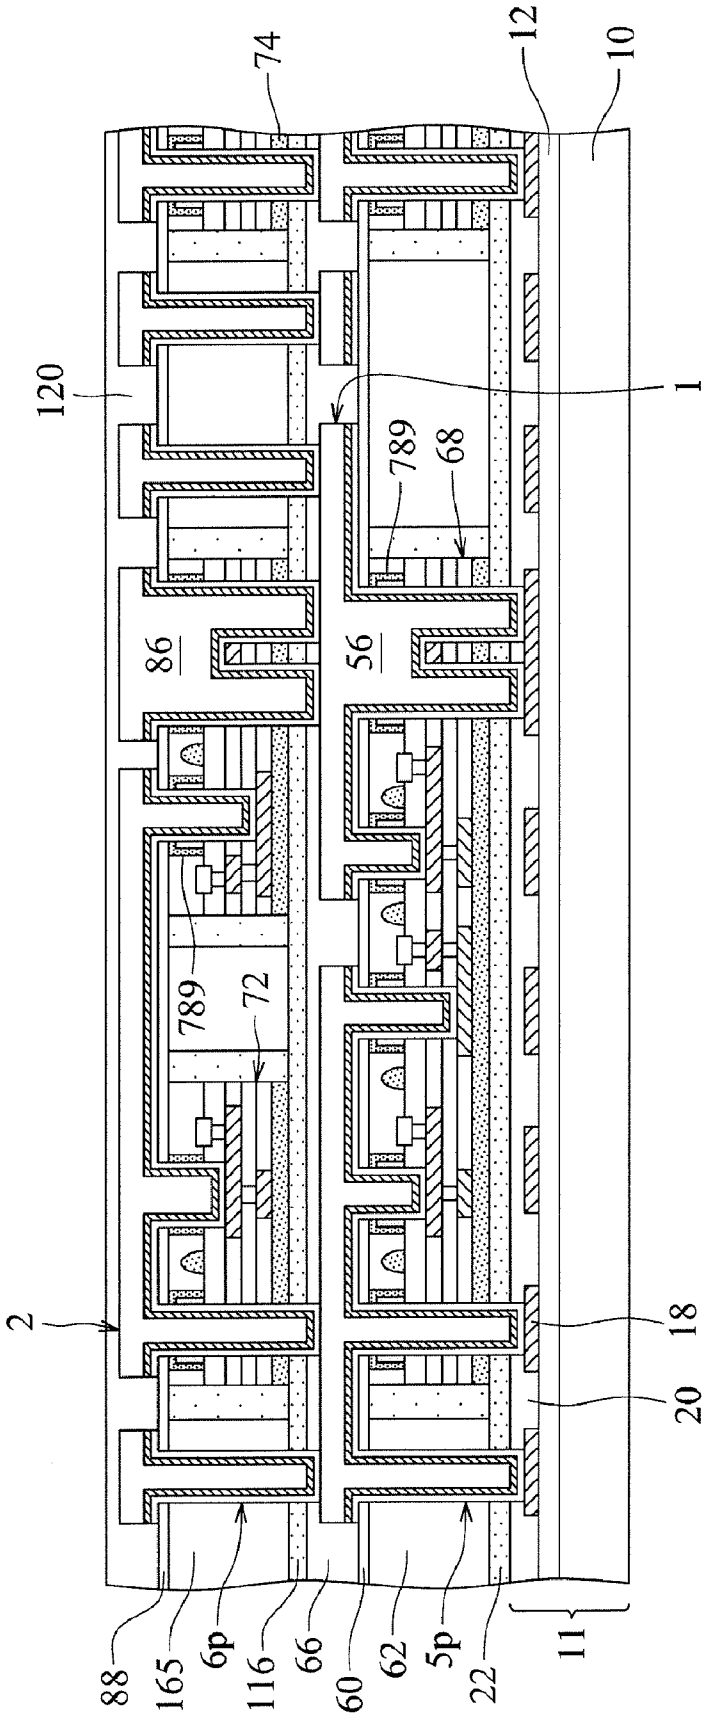

74
12
10
120
1
789
68
86
56
789
72
2
18
20
88
165
6p
116
66
60
62
5p
22
11

Fig. 264

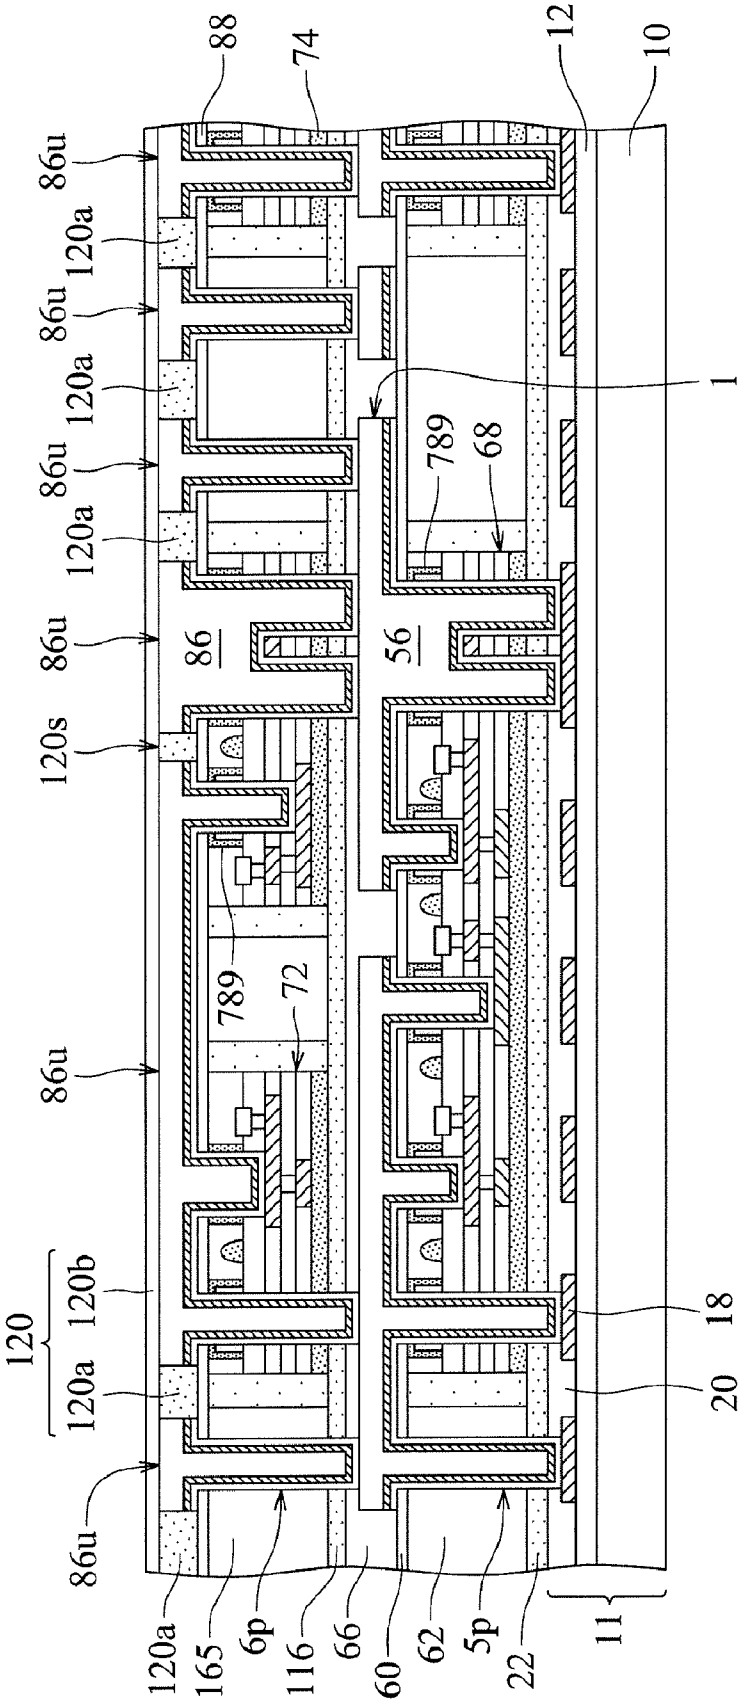

88
74
12
10
86u
120a
86u
120a
86u
120a
86u
120a
86u
120s
86u
120
120b
120a
86u
120a
165
6p
116
66
60
62
5p
22
11
18
20
1
789
68
86
56
789
72

Fig. 265

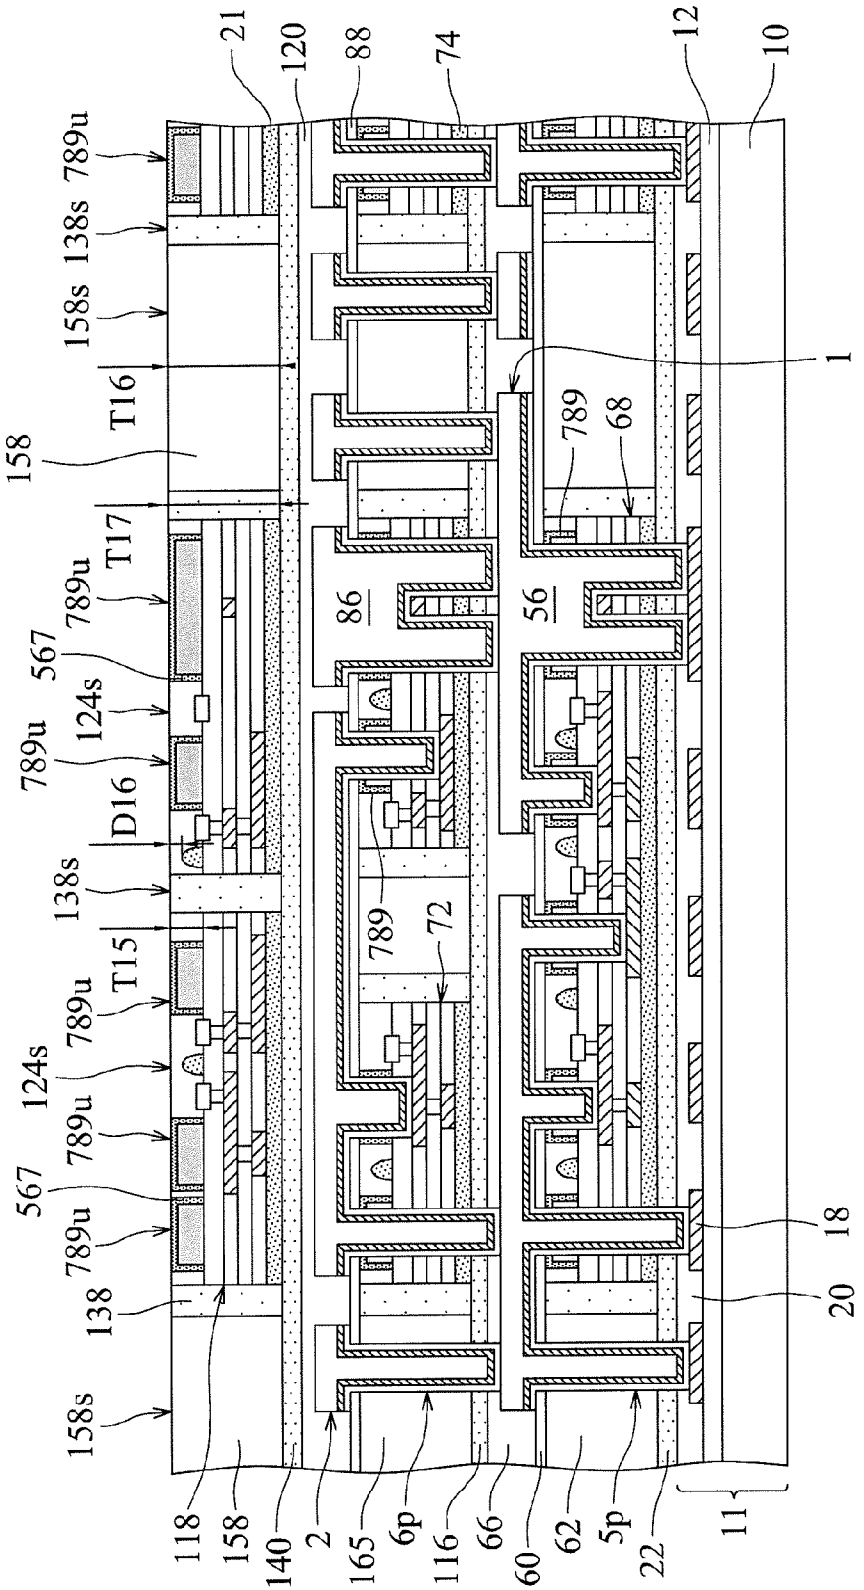

21
120
88
74
12
10
789u
138s
158s
T16
158
T17
789u
567
124s
789u
D16
138s
T15
789u
124s
789u
567
789u
138
158s
1
789
68
86
56
789
72
18
20
118
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 266

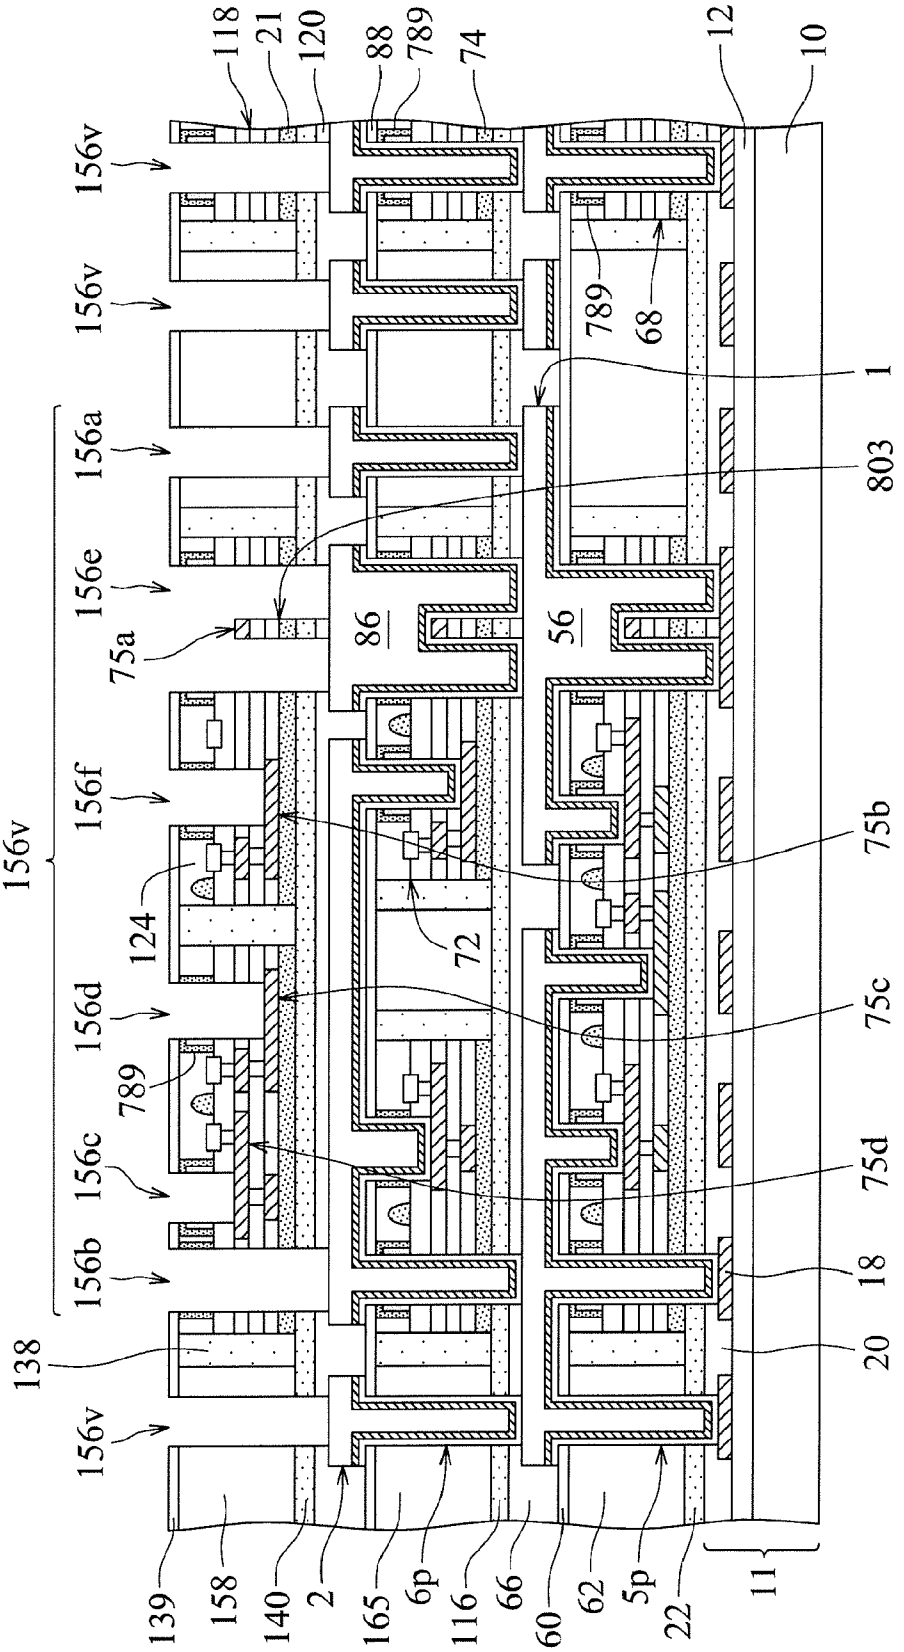

118
21
120
88
789
74
12
10
156v
156v
789
68
1
803
156a
156e
75a
86
56
156f
75b
124
72
156d
75c
789
156c
75d
156b
18
138
20
156v
139
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 267

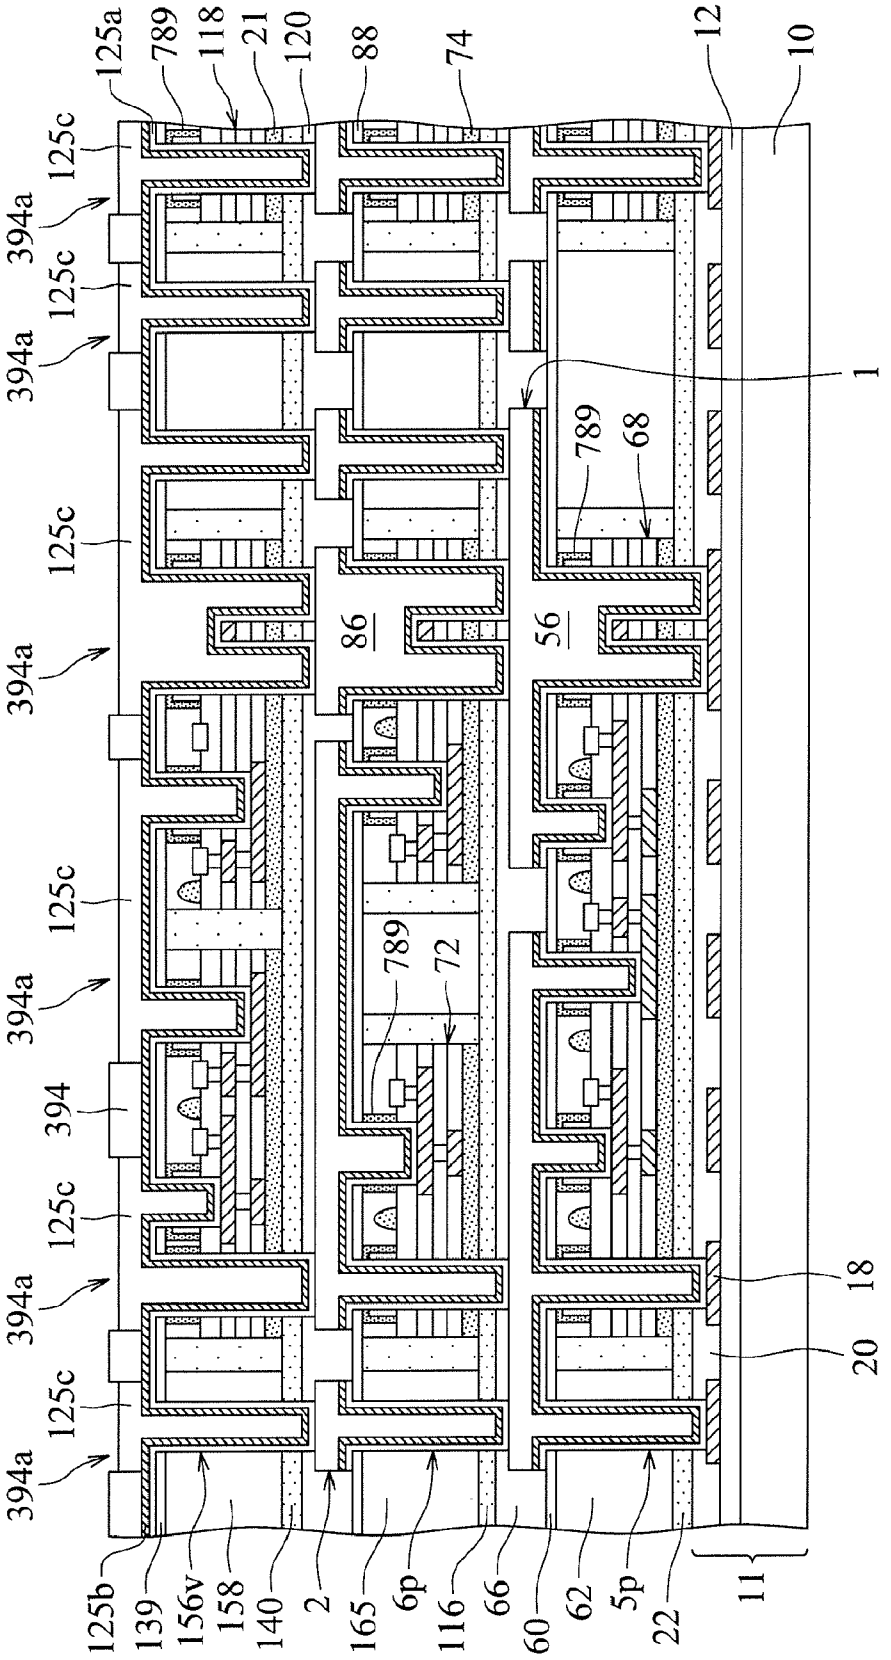

125a
789
118
21
120
88
74
12
10
125c
394a
125c
394a
125c
1
789
68
394a
125c
86
56
394a
125c
789
72
394
125c
394a
125c
394a
18
20
125b
139
156v
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 268

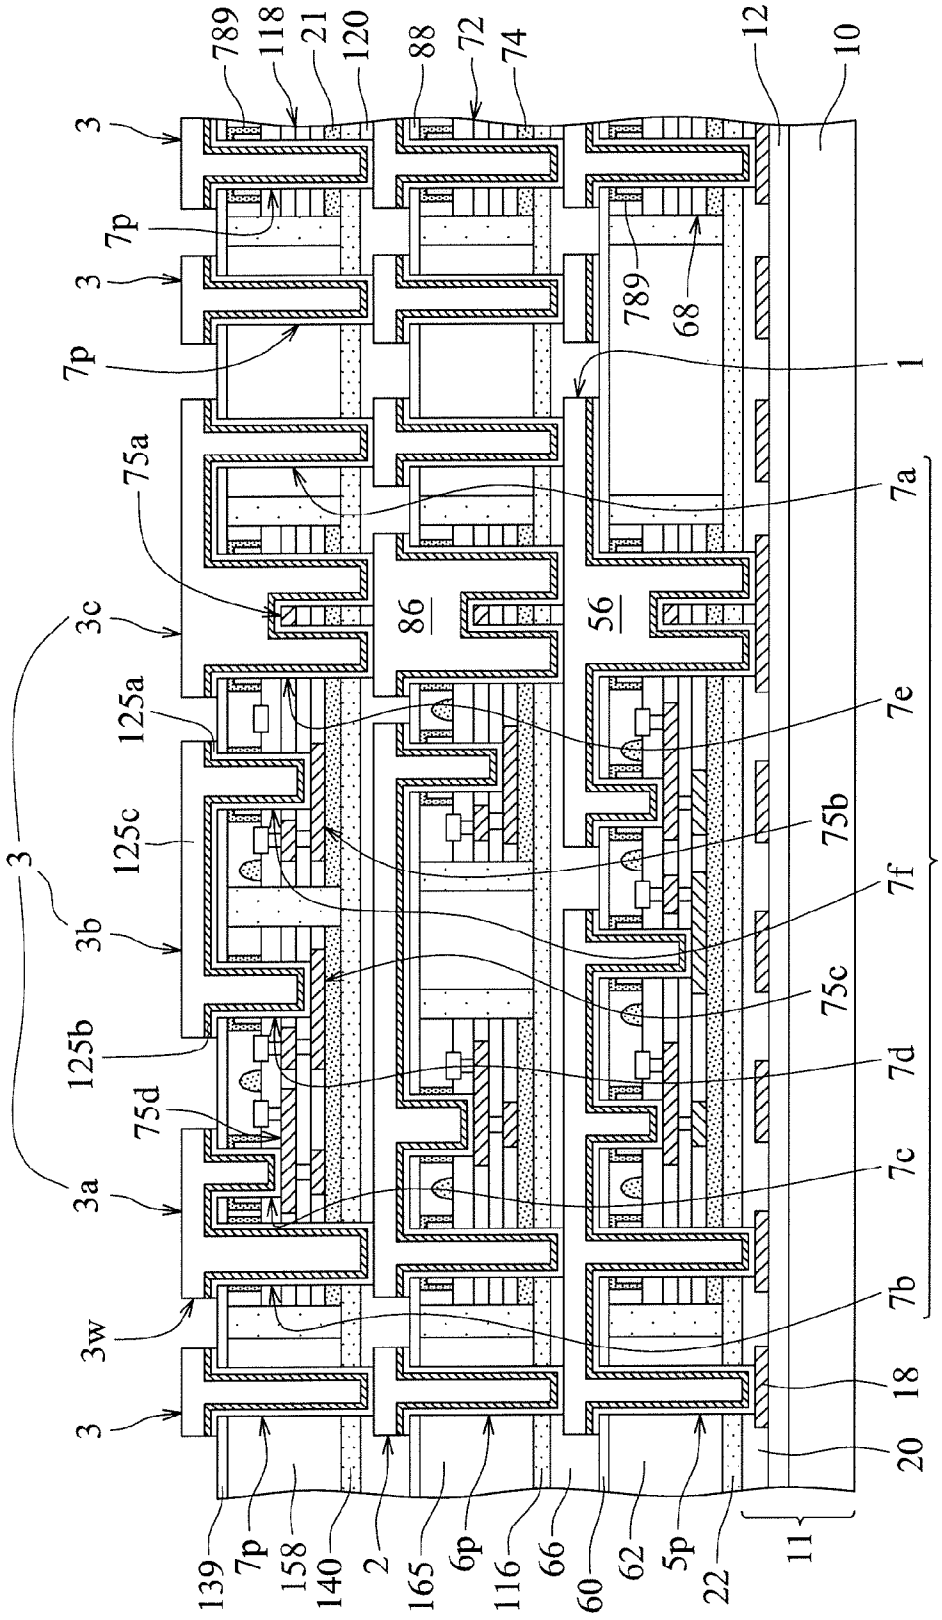

789
118
21
120
88
72
74
12
10
3
7p
3
7p
789
68
1
75a
7a
3c
86
56
125a
7e
125c
75b
3
3b
7f
7p
125b
75c
7d
75d
3a
7c
3w
7b
18
3
20
139
7p
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 269

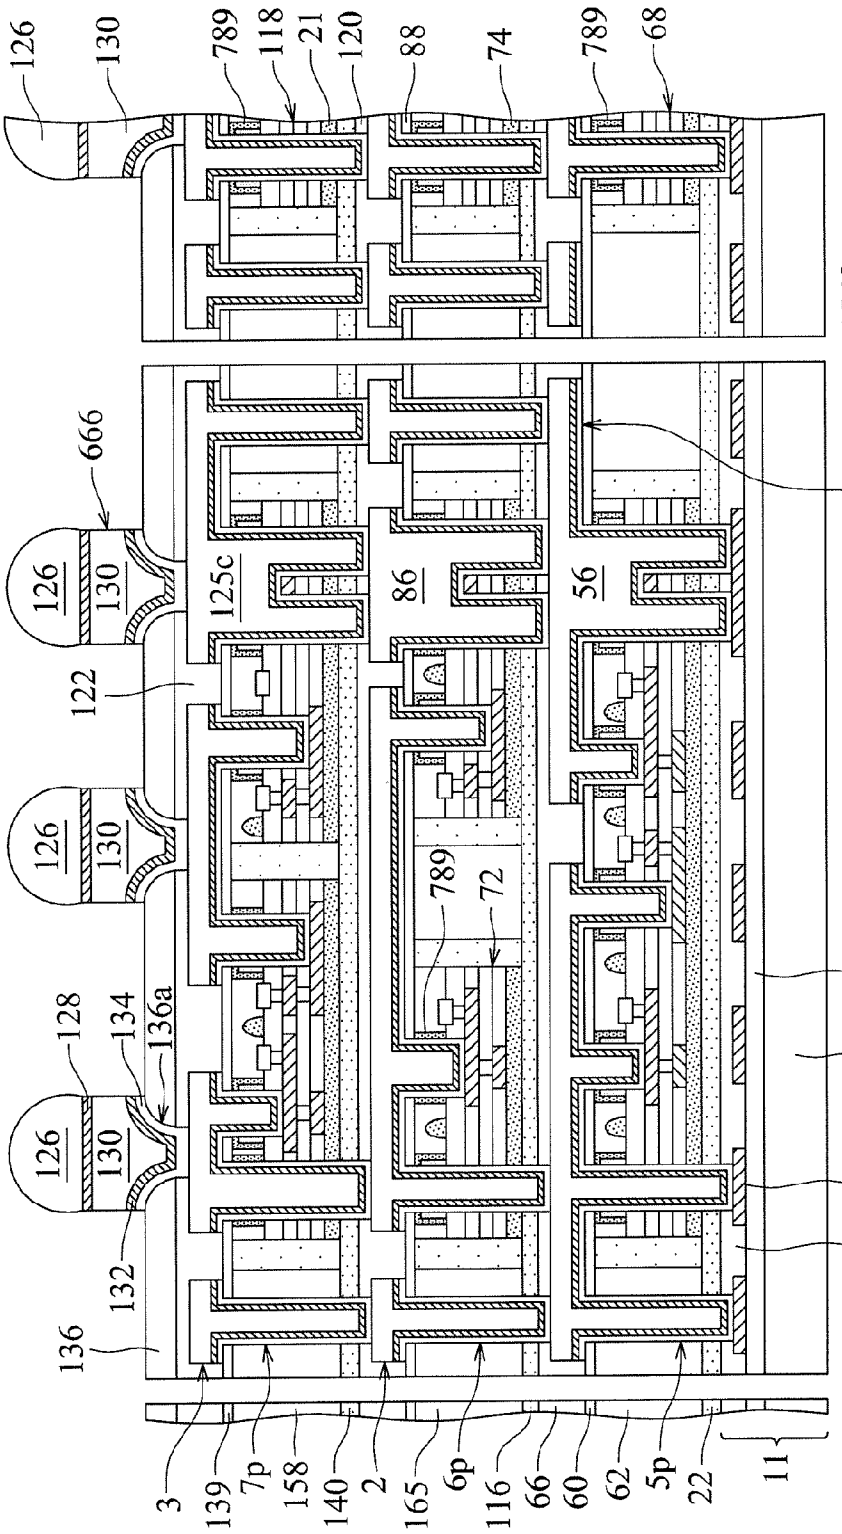

126
130
789
118
21
120
88
74
789
68
556f
666
1
126
130
125c
86
56
122
126
130
789
72
12
128
134
136a
126
130
10
18
132
20
136
556e
3
139
7p
158
140
2
165
6p
116
66
60
62
5p
22
11

Fig. 270

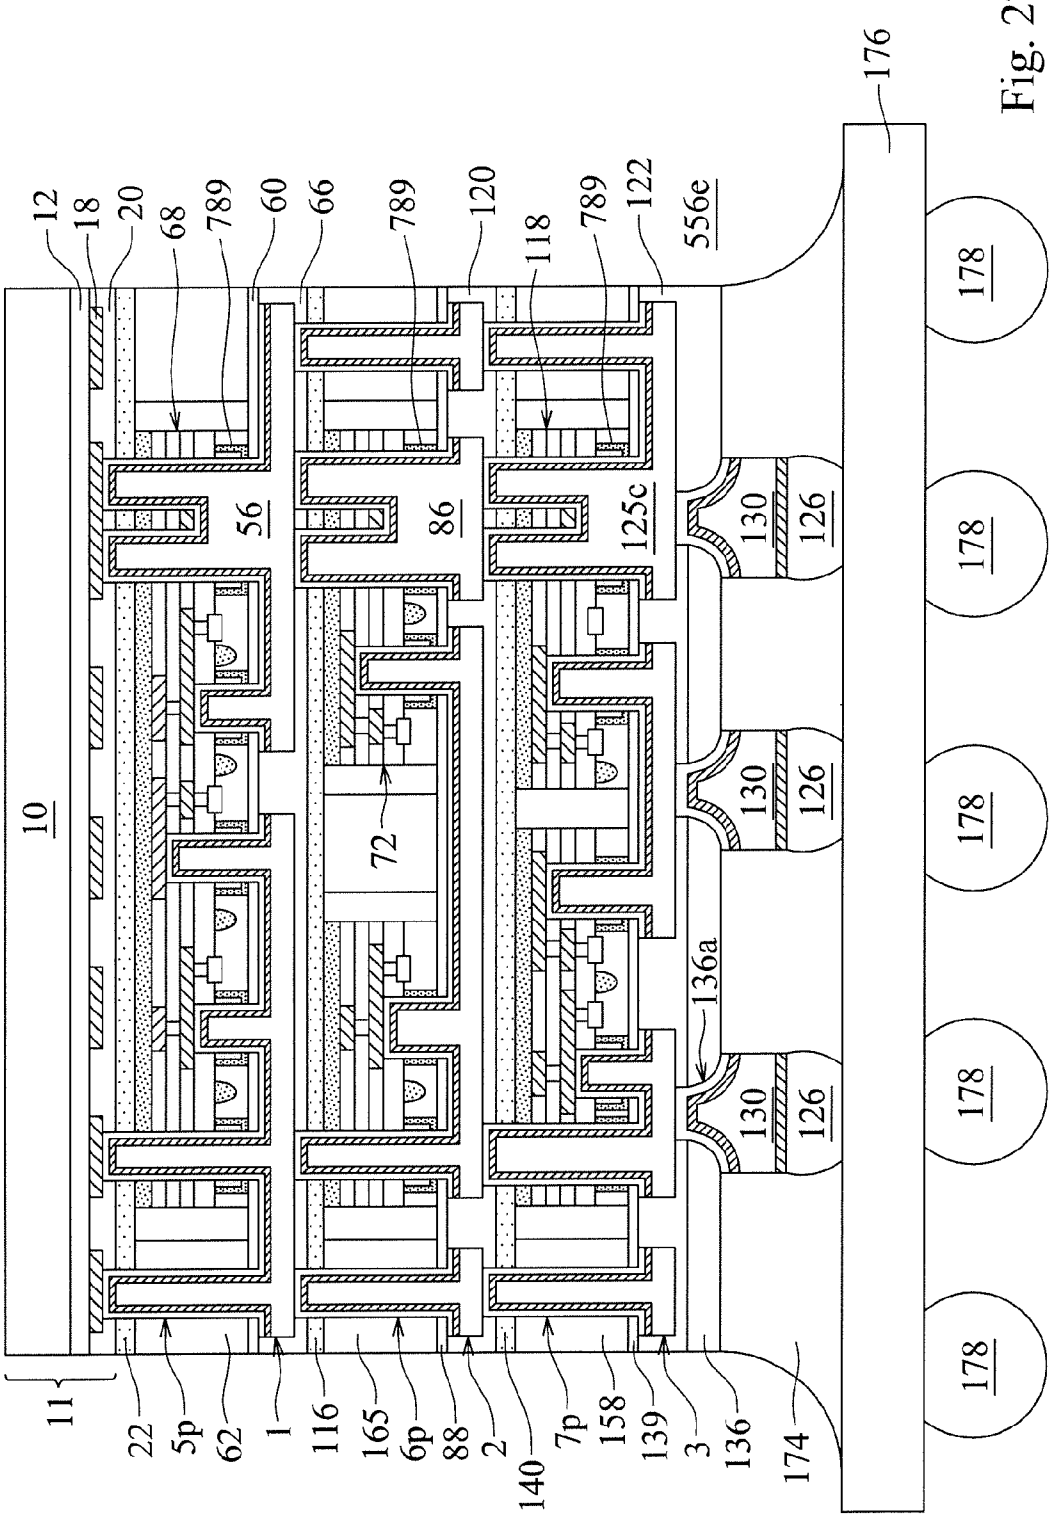

12
18
20
68
789
60
66
789
120
118
789
122
556e
176
178
178
178
178
178
56
86
125c
130
126
130
126
130
126
72
136a
10
11
22
5p
62
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 271

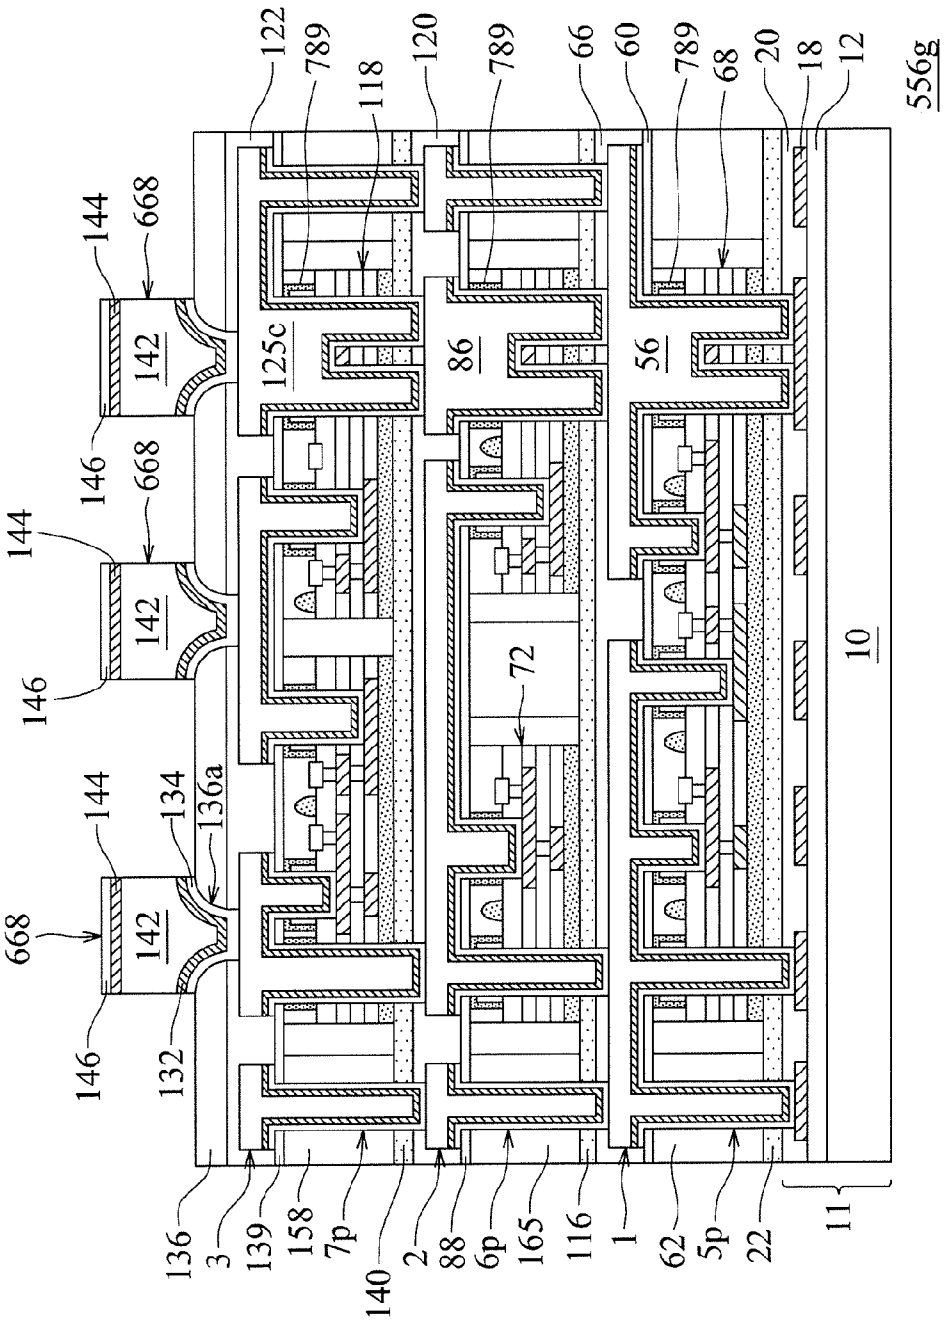

122
789
118
120
789
66
60
789
68
20
18
12
556g
144
668
142
125c
86
56
146
668
144
142
146
72
10
144
134
136a
668
142
146
132
136
3
139
158
7p
140
2
88
6p
165
116
1
62
5p
22
11

Fig. 272

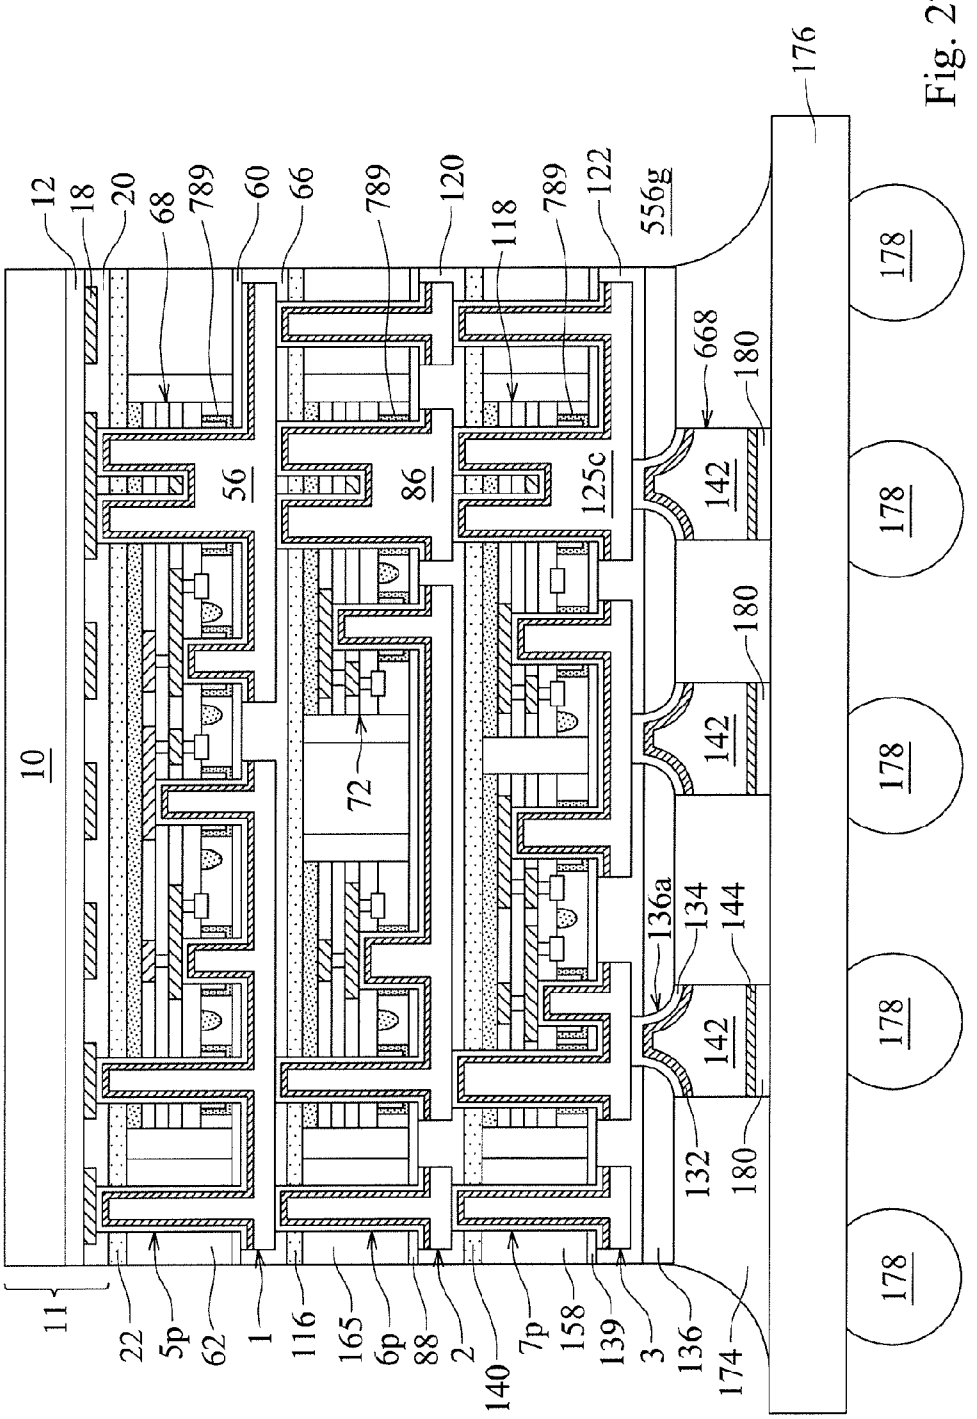

12
18
20
68
789
60
66
789
120
118
789
122
556g
176
178
668
180
142
56
86
125c
72
10
136a
134
144
132
11
22
5p
62
1
116
165
6p
88
2
140
7p
158
139
3
136
174

Fig. 273

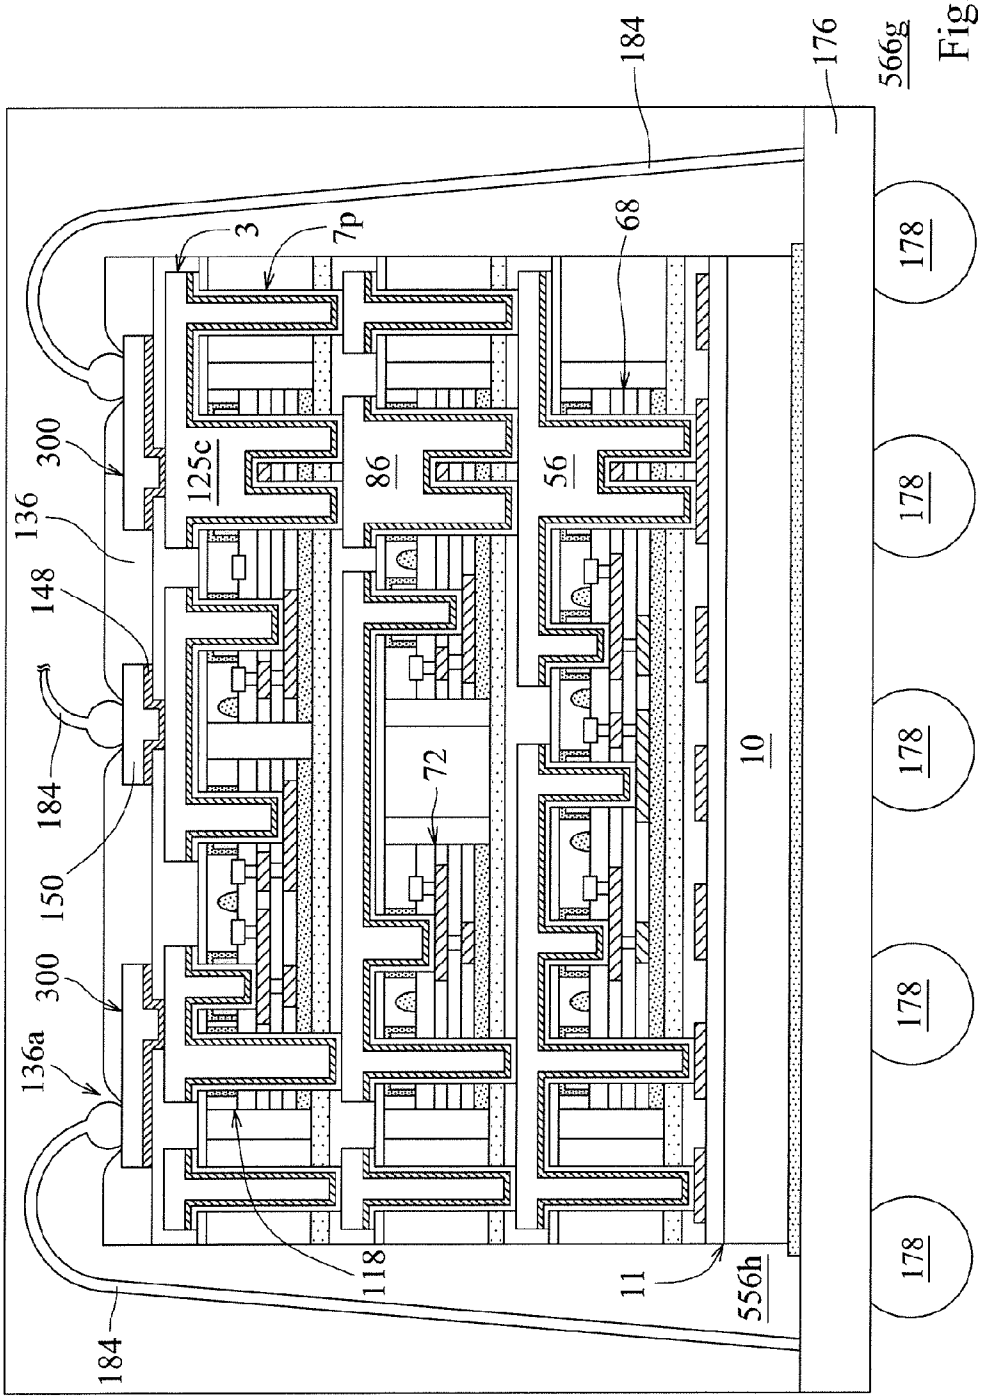

184
176
566g
3
7p
68
178
178
178
178
178
300
136
125c
86
56
148
184
72
10
150
300
136a
118
11
556h
184

Fig. 274

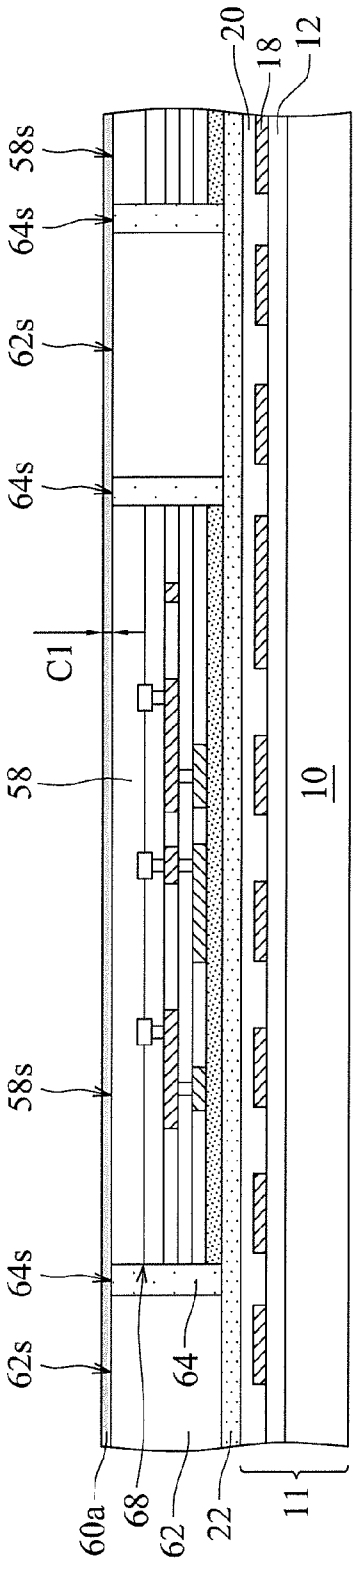


Fig. 275A

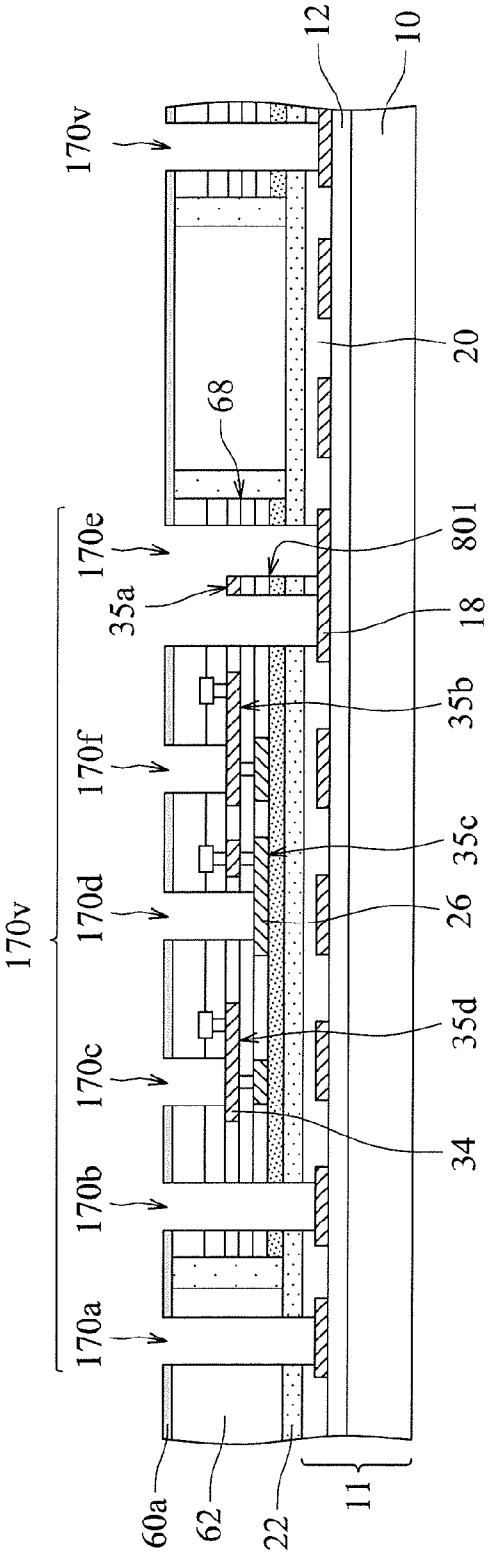


Fig. 275B

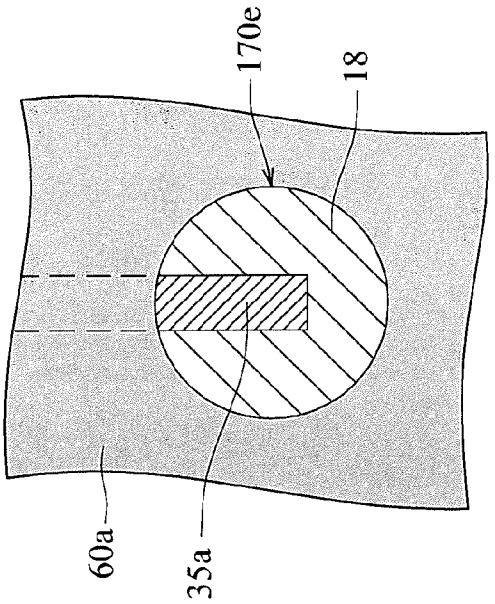


Fig. 265D

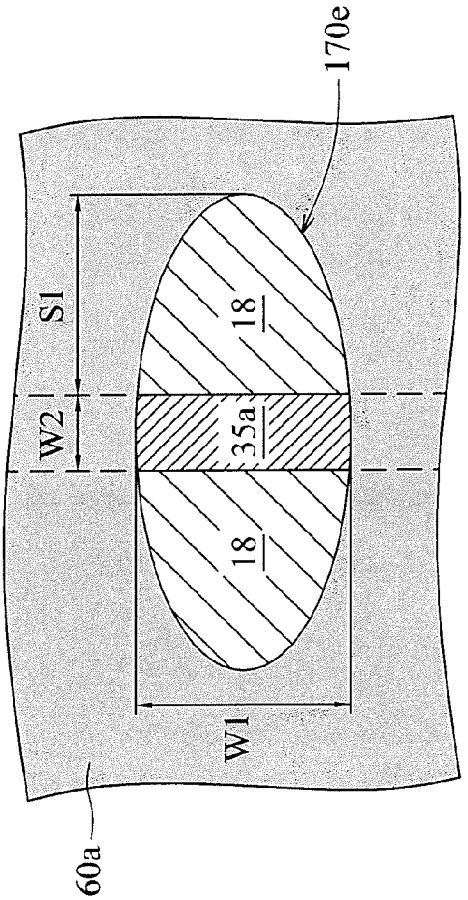


Fig. 275C

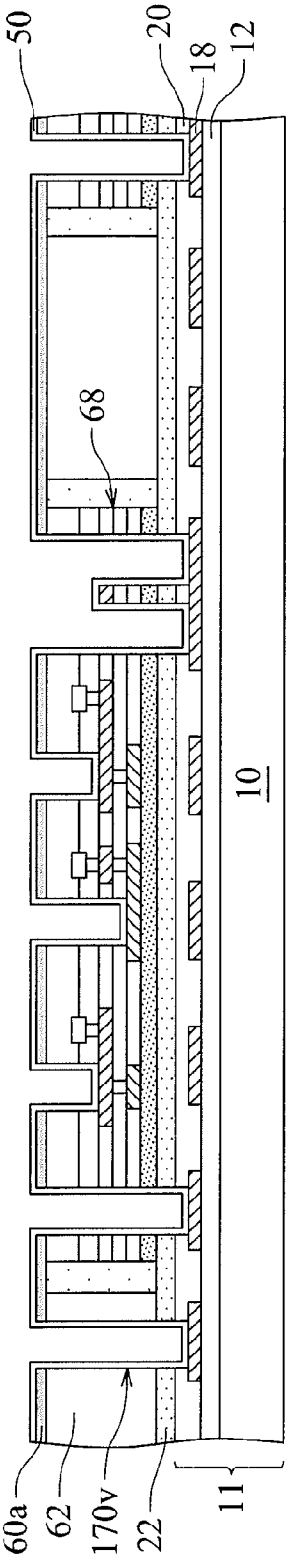


Fig. 275E

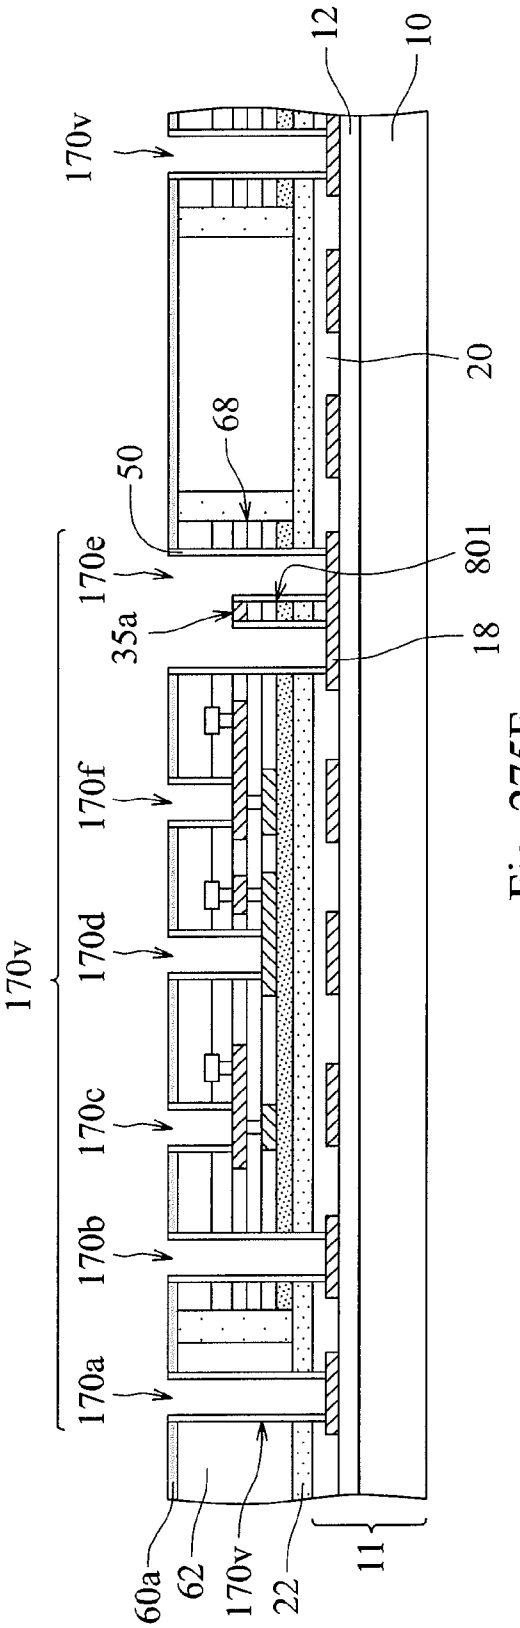


Fig. 275F

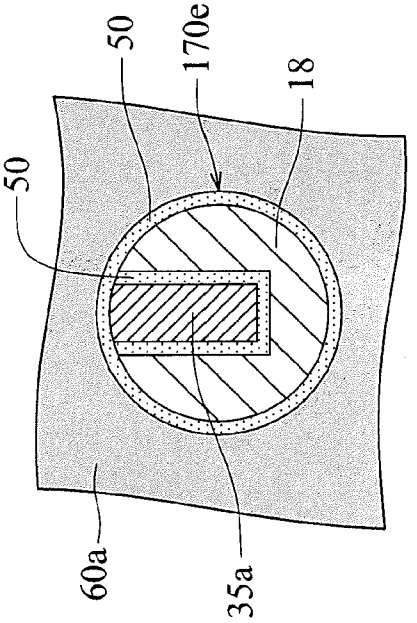


Fig. 275H

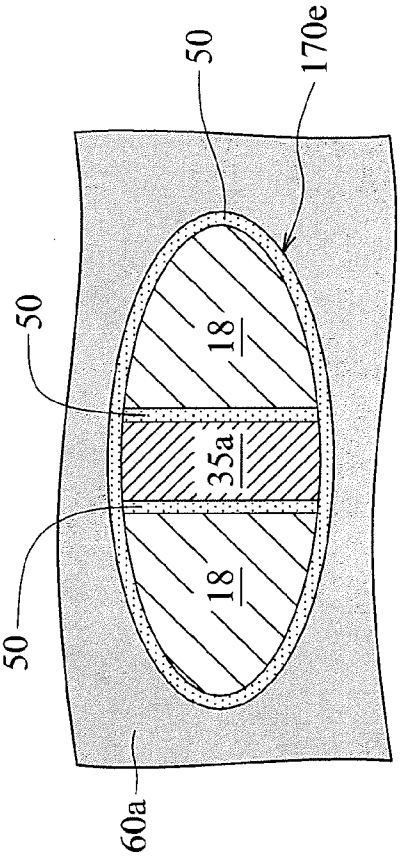


Fig. 275G

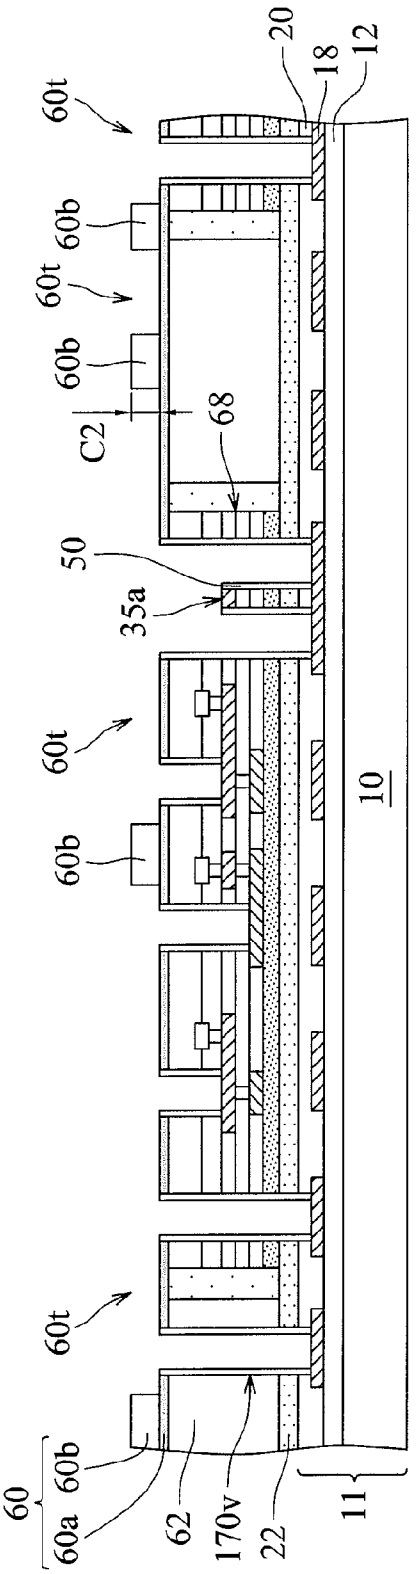


Fig. 275I

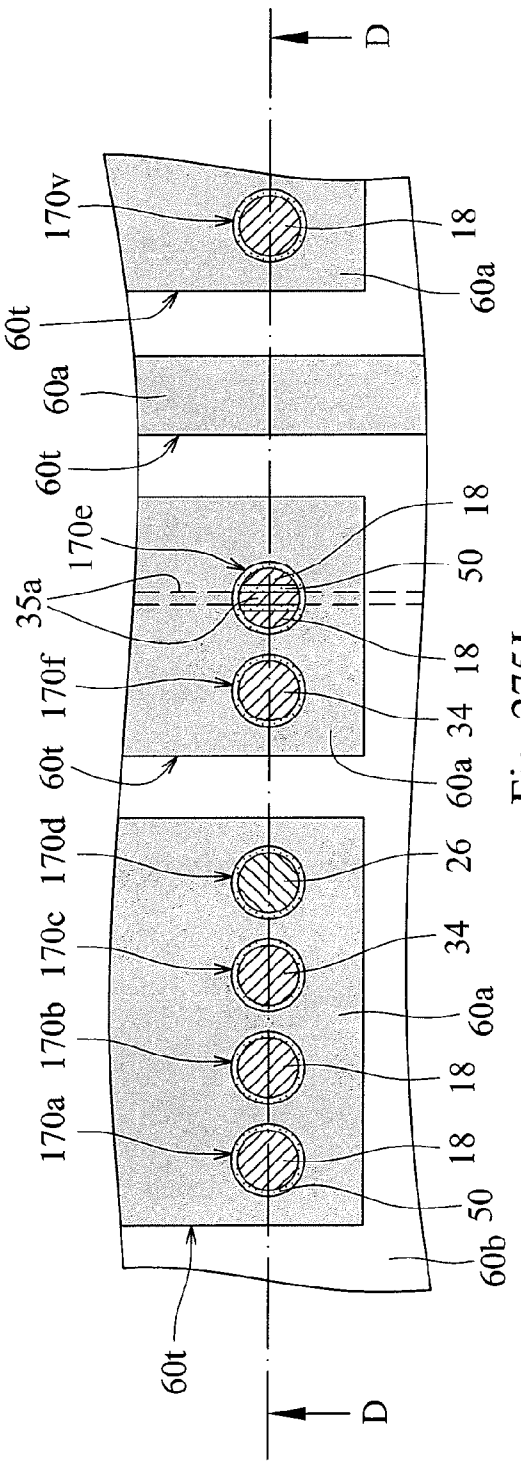


Fig. 275J

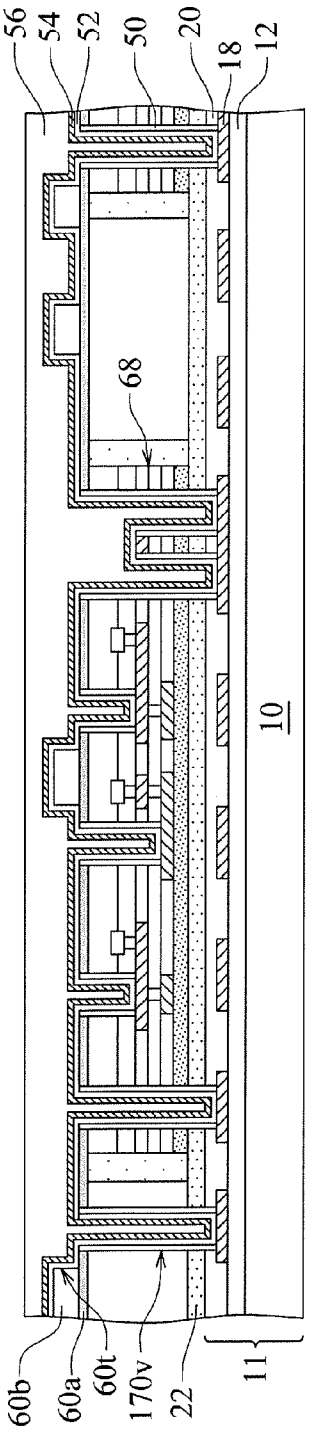


Fig. 275K

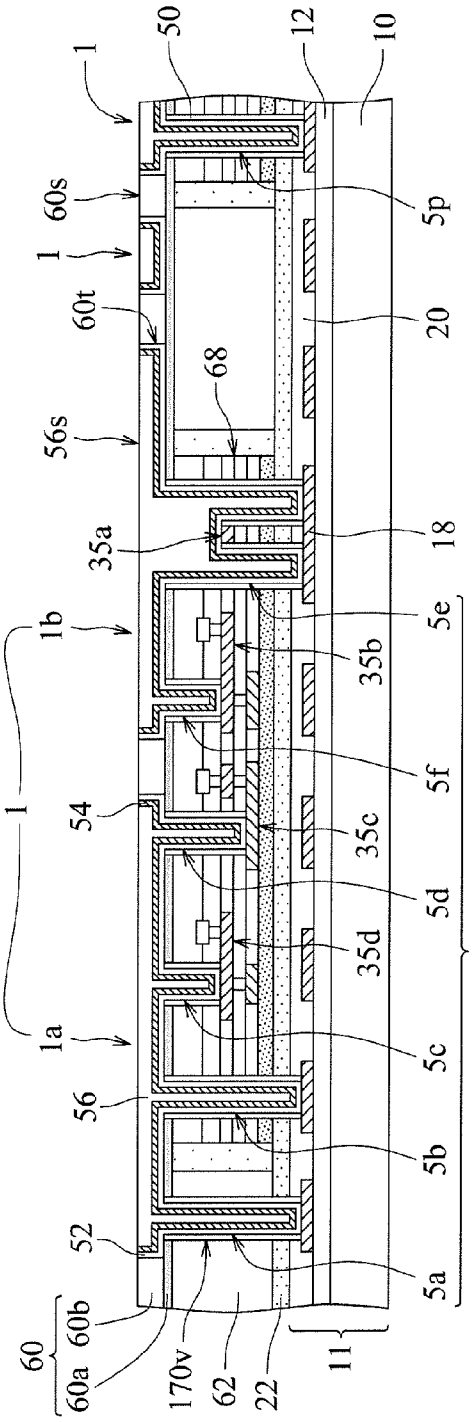


Fig. 275L

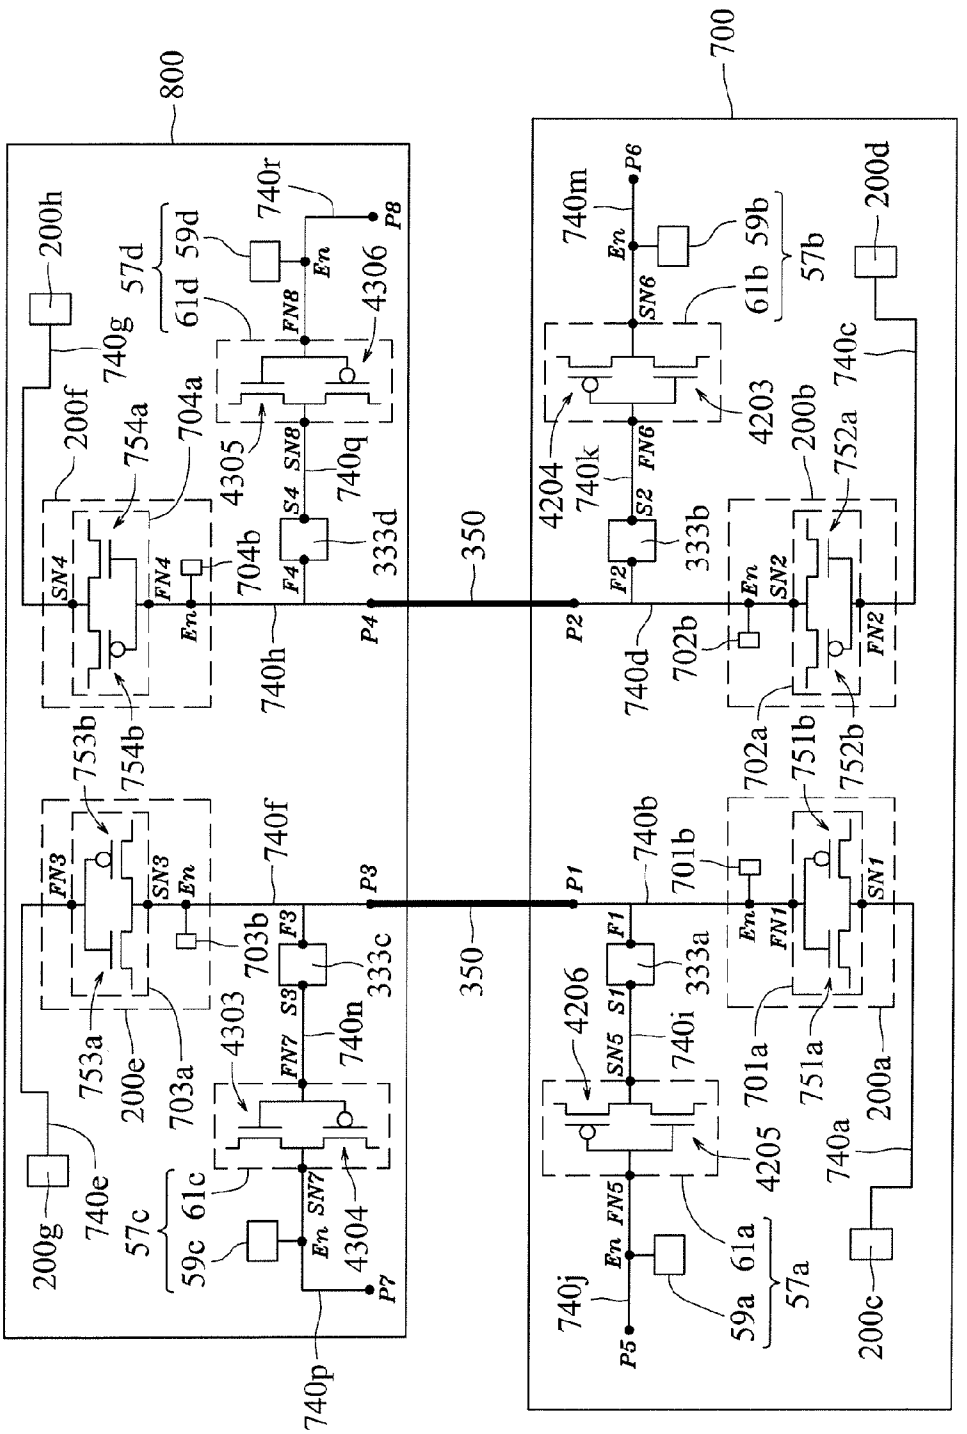

800
700
350
P1
P2
P3
P4
P5
P6
P7
P8
740p
740j
740m
740n
740h
740d
740e
740f
740g
740r
740b
740k
740q
740i
740a
740c
200h
200f
200g
200e
200d
200b
200a
200c
57d
61d
59d
57b
61b
59b
57c
59c
61c
57a
59a
61a
753a
753b
754a
754b
703a
703b
704a
704b
4303
4304
4305
4306
4204
4203
4206
4205
333d
333c
333b
333a
702b
702a
701b
701a
751b
751a
752a
752b
SN4
FN4
SN3
FN3
SN8
FN8
SN6
FN6
SN2
FN2
SN1
FN1
SN5
FN5
SN7
FN7
S4
F4
S3
F3
S2
F2
S1
F1
En

Fig. 276

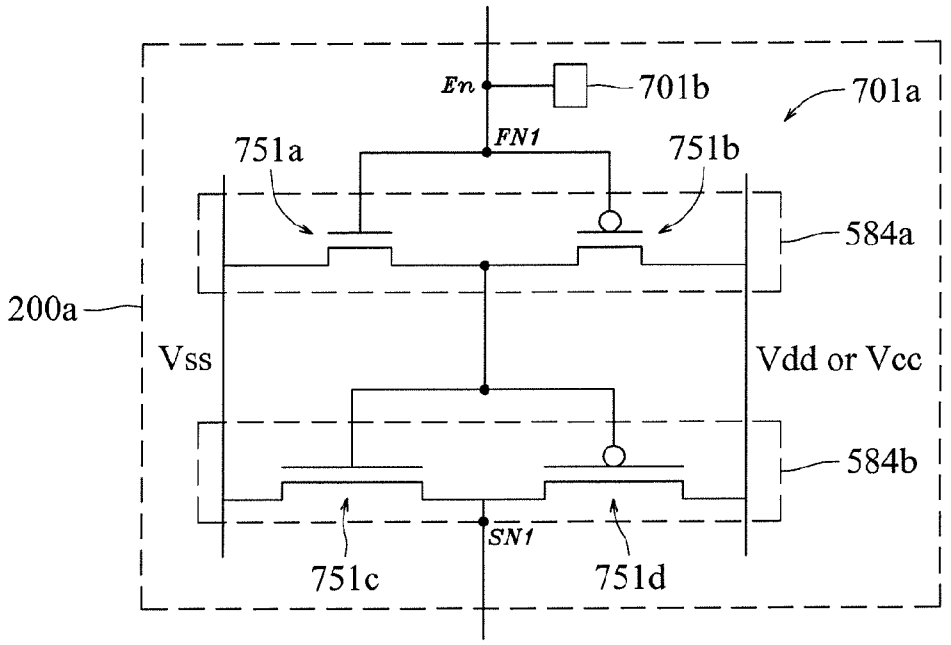


Fig. 277

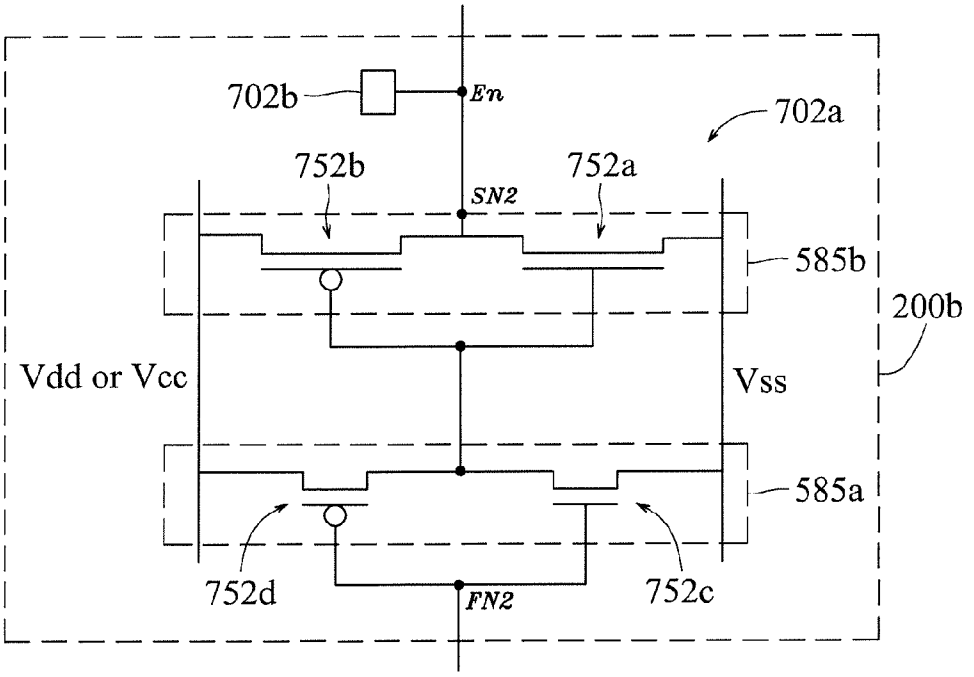


Fig. 278

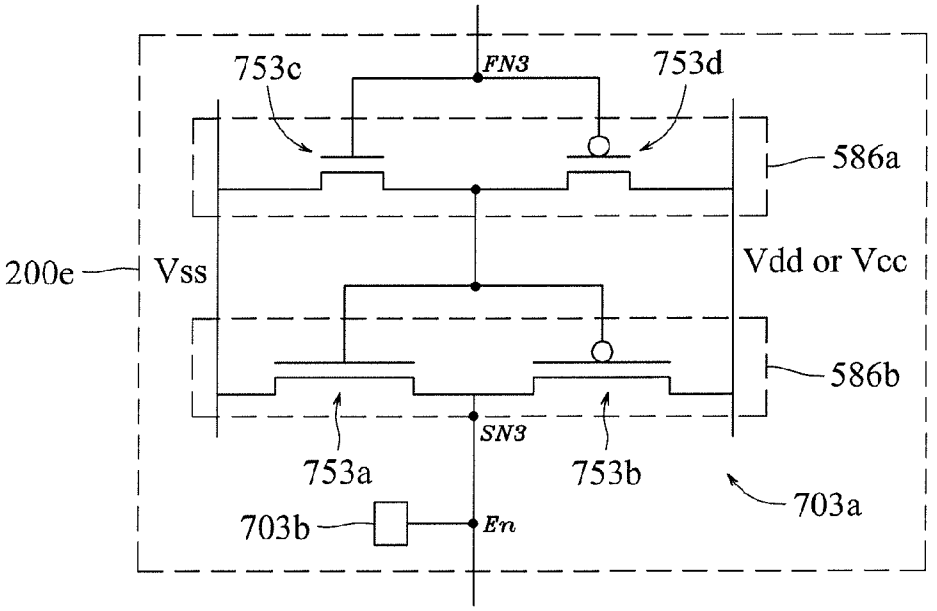


Fig. 279

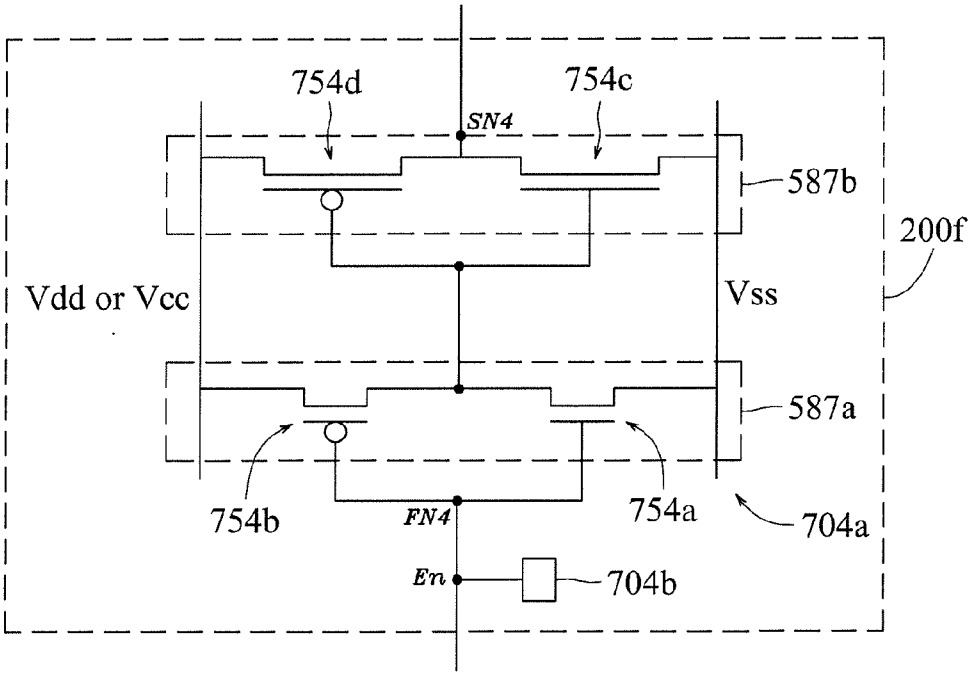


Fig. 280

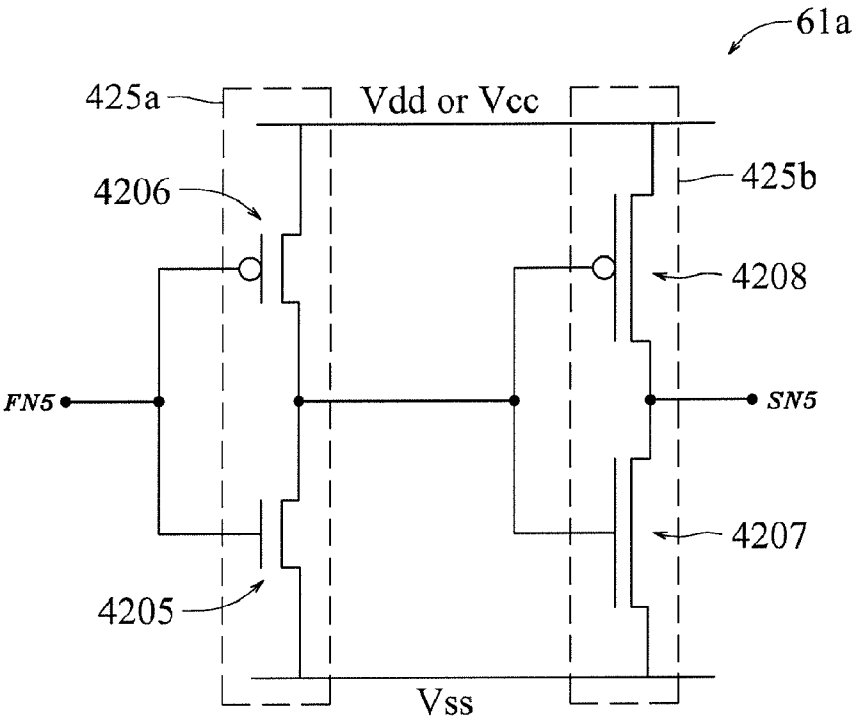


Fig. 281

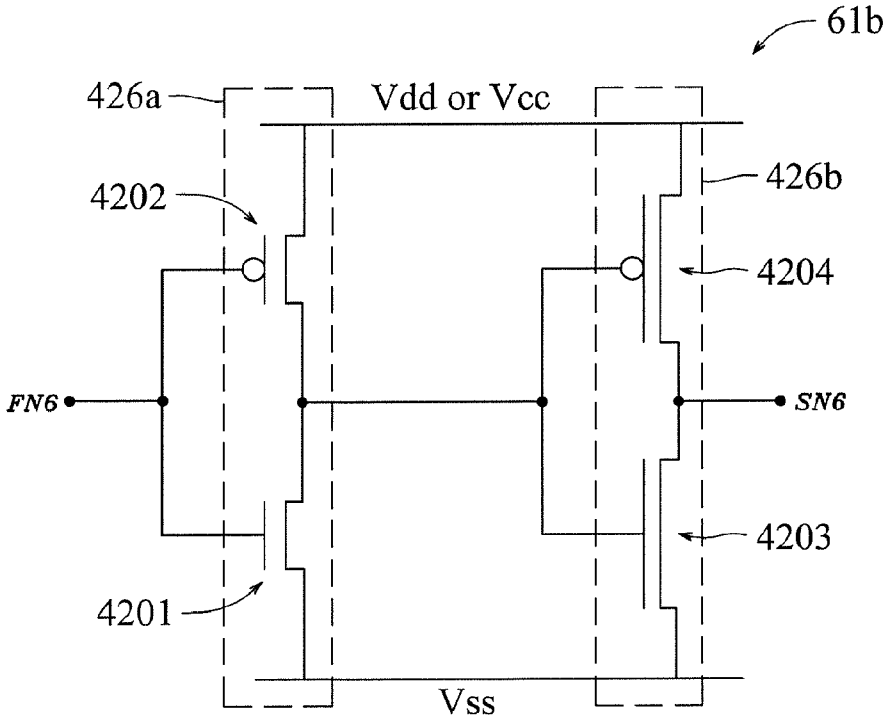


Fig. 282

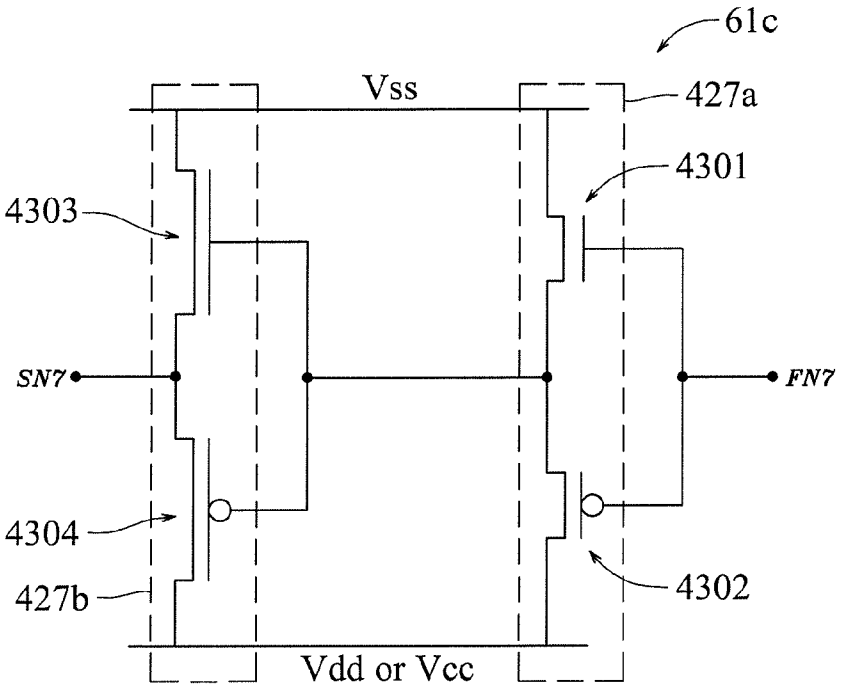


Fig. 283

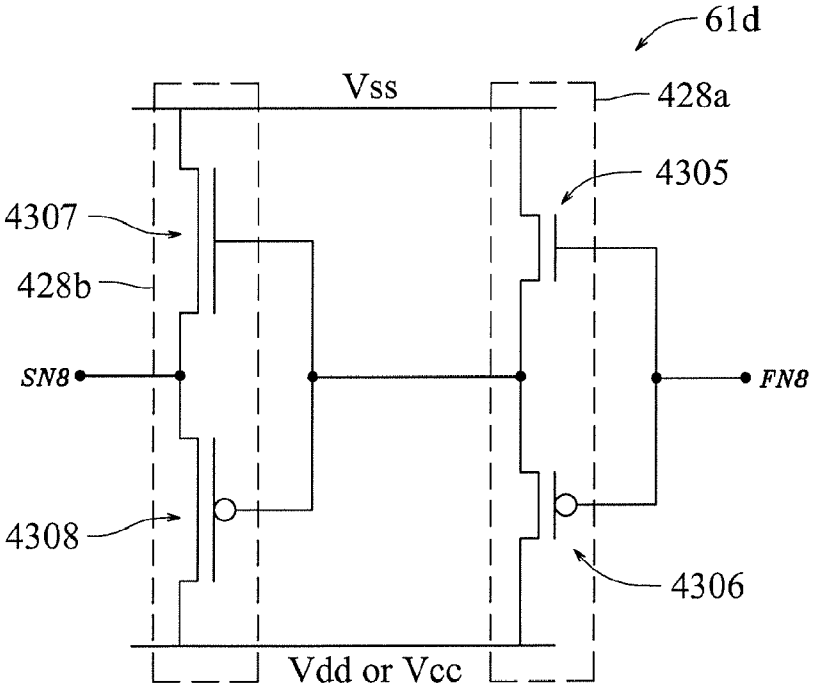


Fig. 284

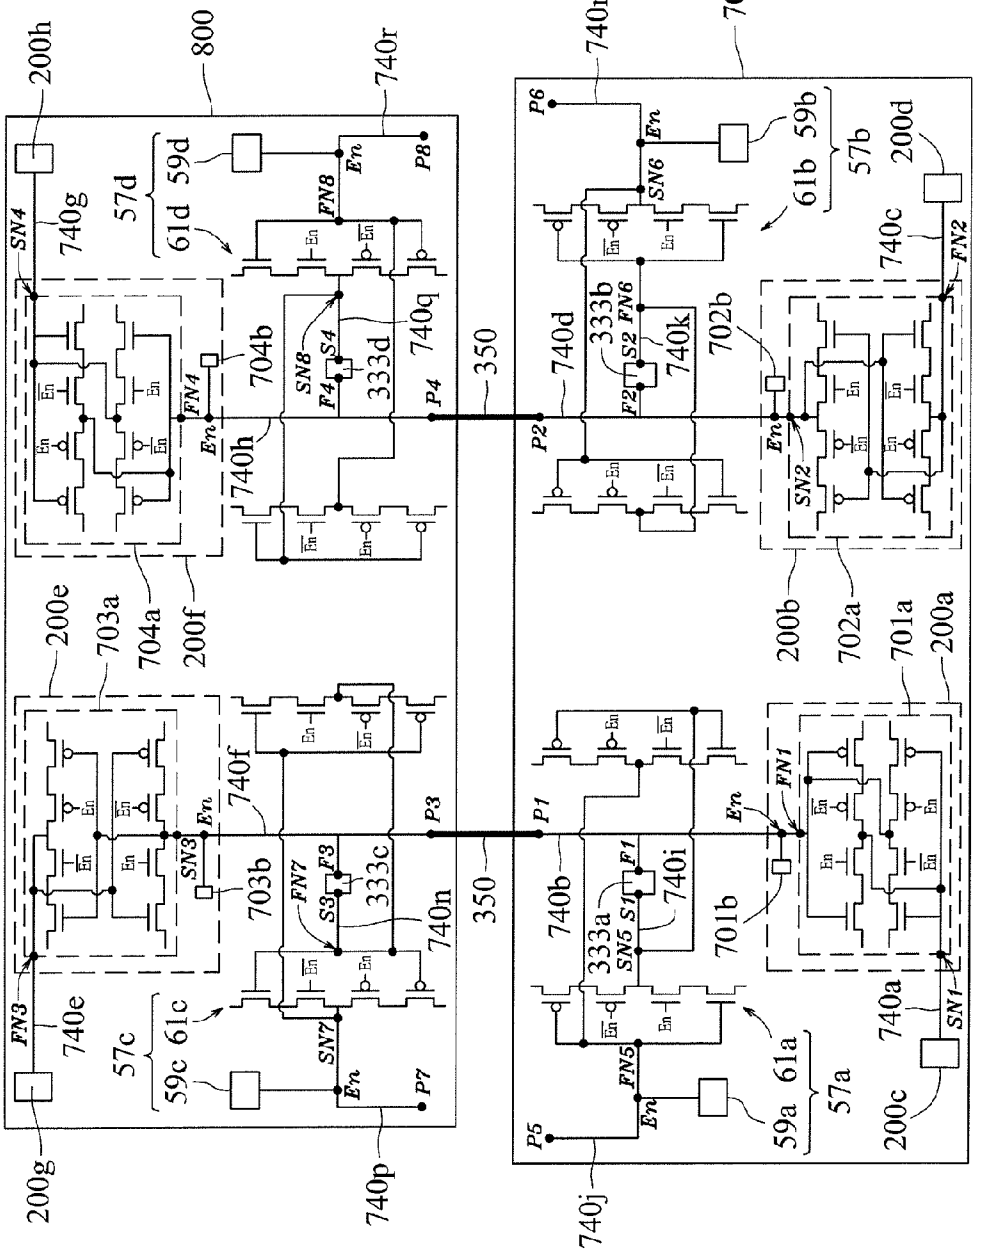

200h
800
740r
740m
700
740g
57d
61d 59d
704b
333d
740q
350
740d
333b
740k
702b
61b 59b
57b
200d
740c
704a
200f
703a
200e
740f
703b
333c
740n
740b
333a
740i
701b
701a
200a
200b
702a
740e
57c
61c
59c
740p
740j
59a 61a
57a
740a
200c
200g
P1
P2
P3
P4
P5
P6
P7
P8
SN1
SN2
SN3
SN4
SN5
SN6
SN7
SN8
FN1
FN2
FN3
FN4
FN5
FN6
FN7
FN8
F1
F2
F3
F4
S1
S2
S3
S4
En

Fig. 285

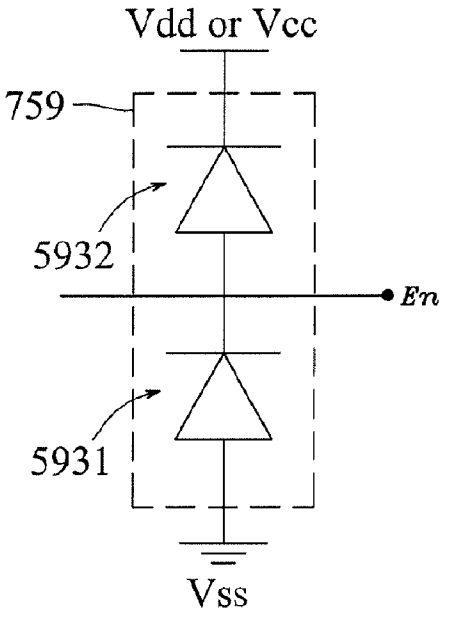


Fig. 286

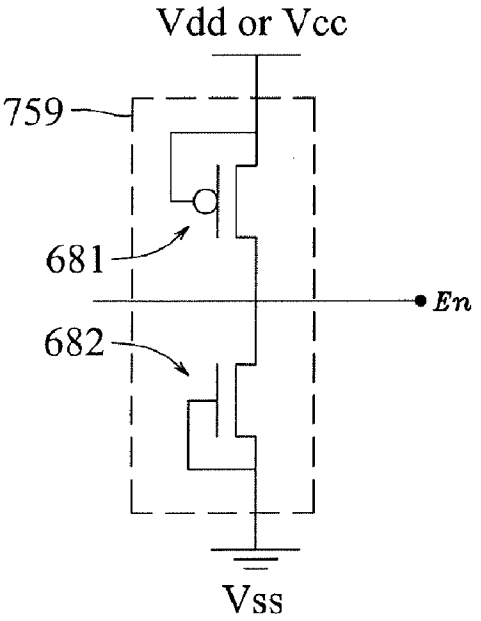


Fig. 287

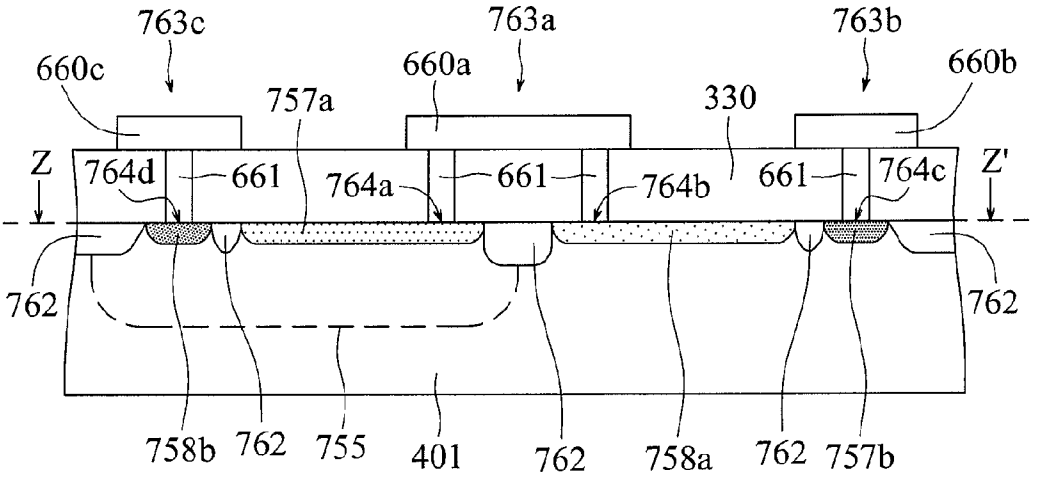


Fig. 288

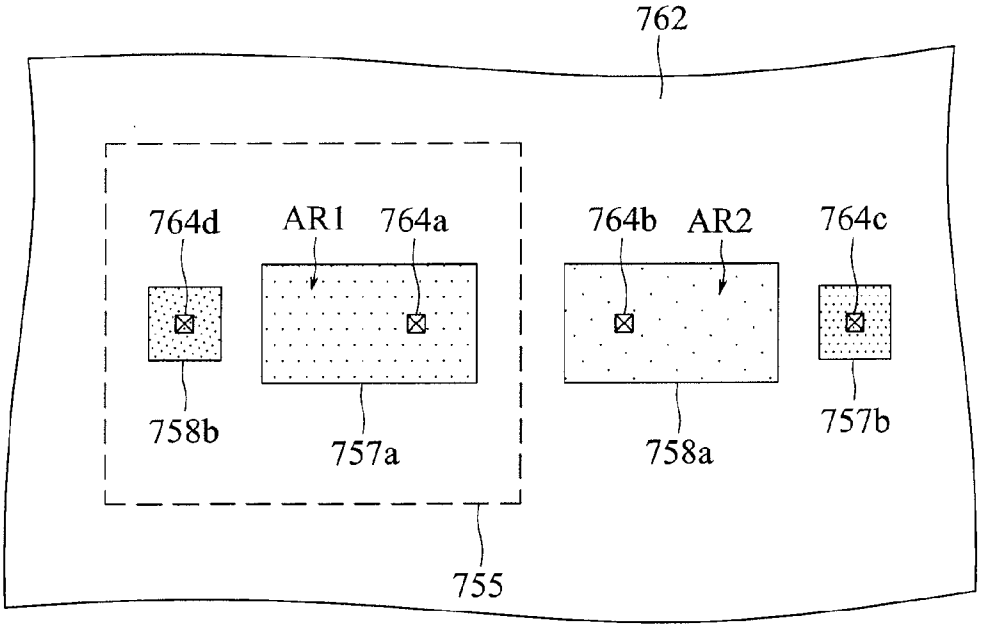


Fig. 289

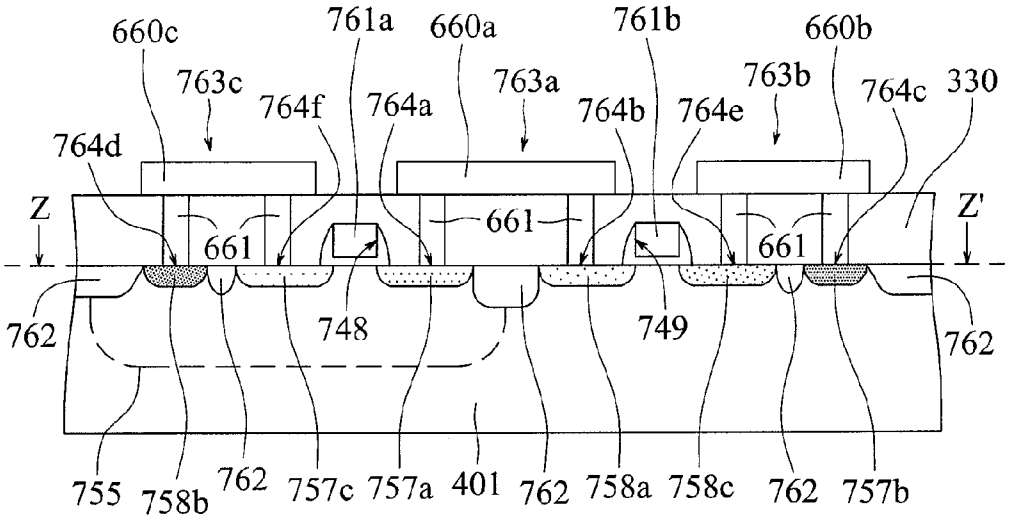


Fig. 290

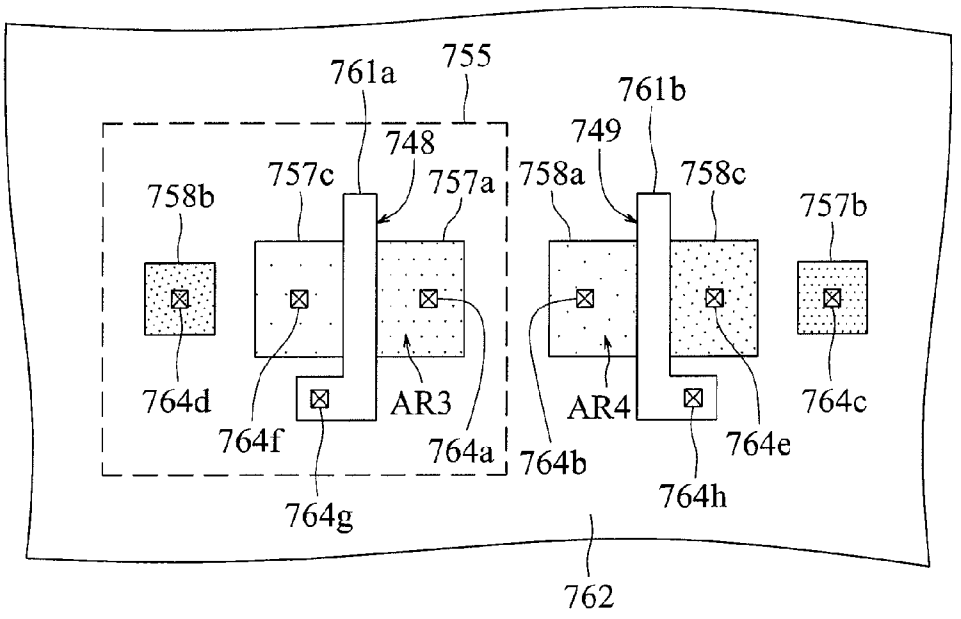


Fig. 291

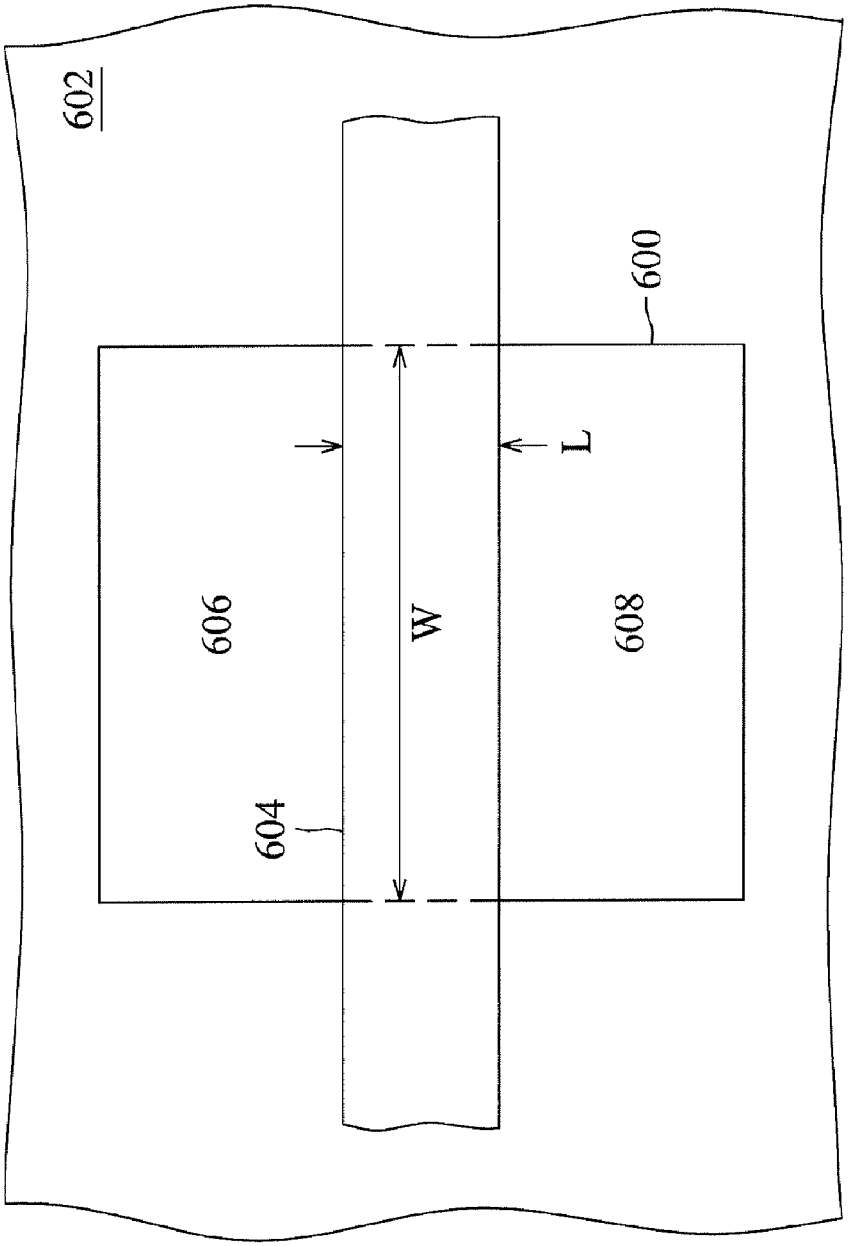


Fig. 292

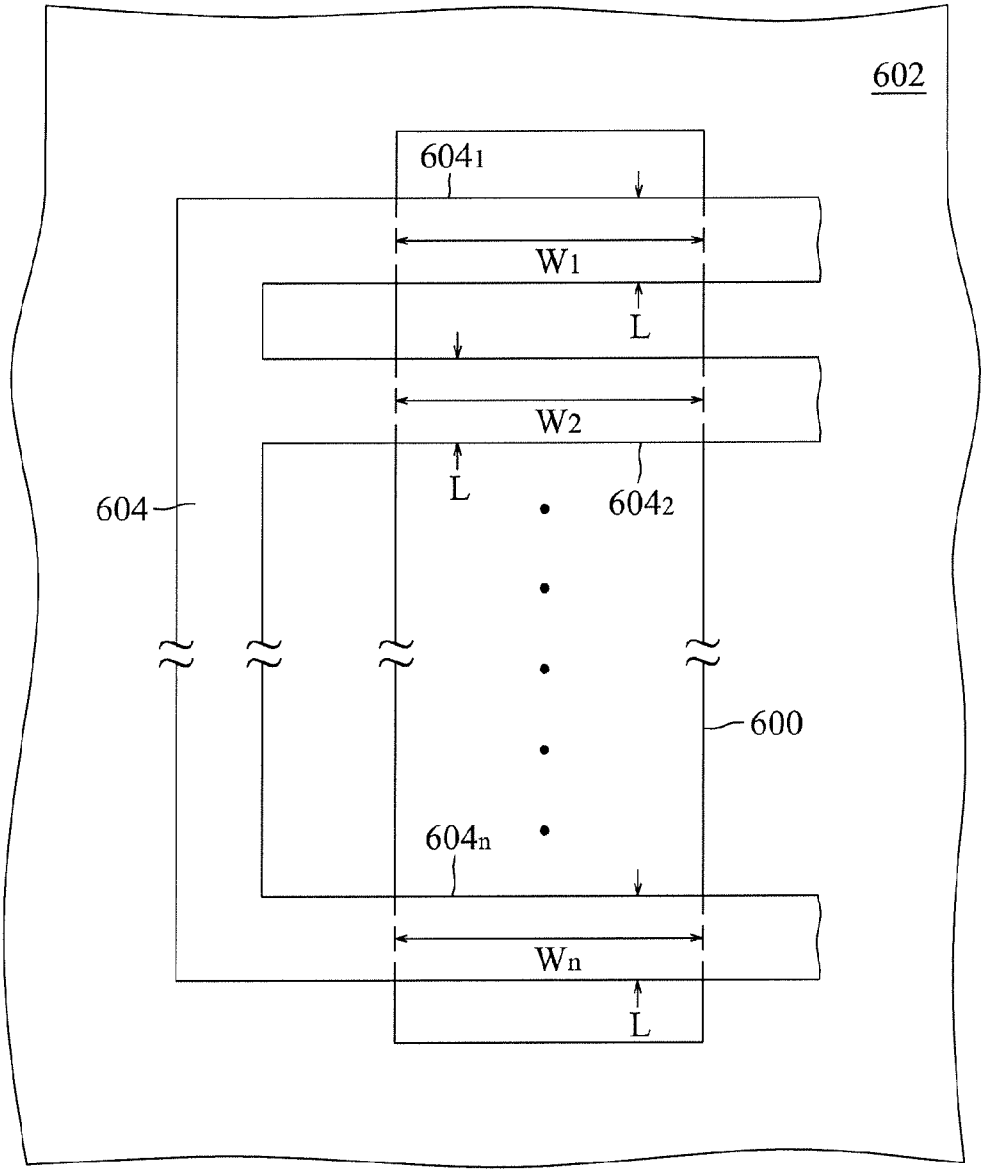


Fig. 293

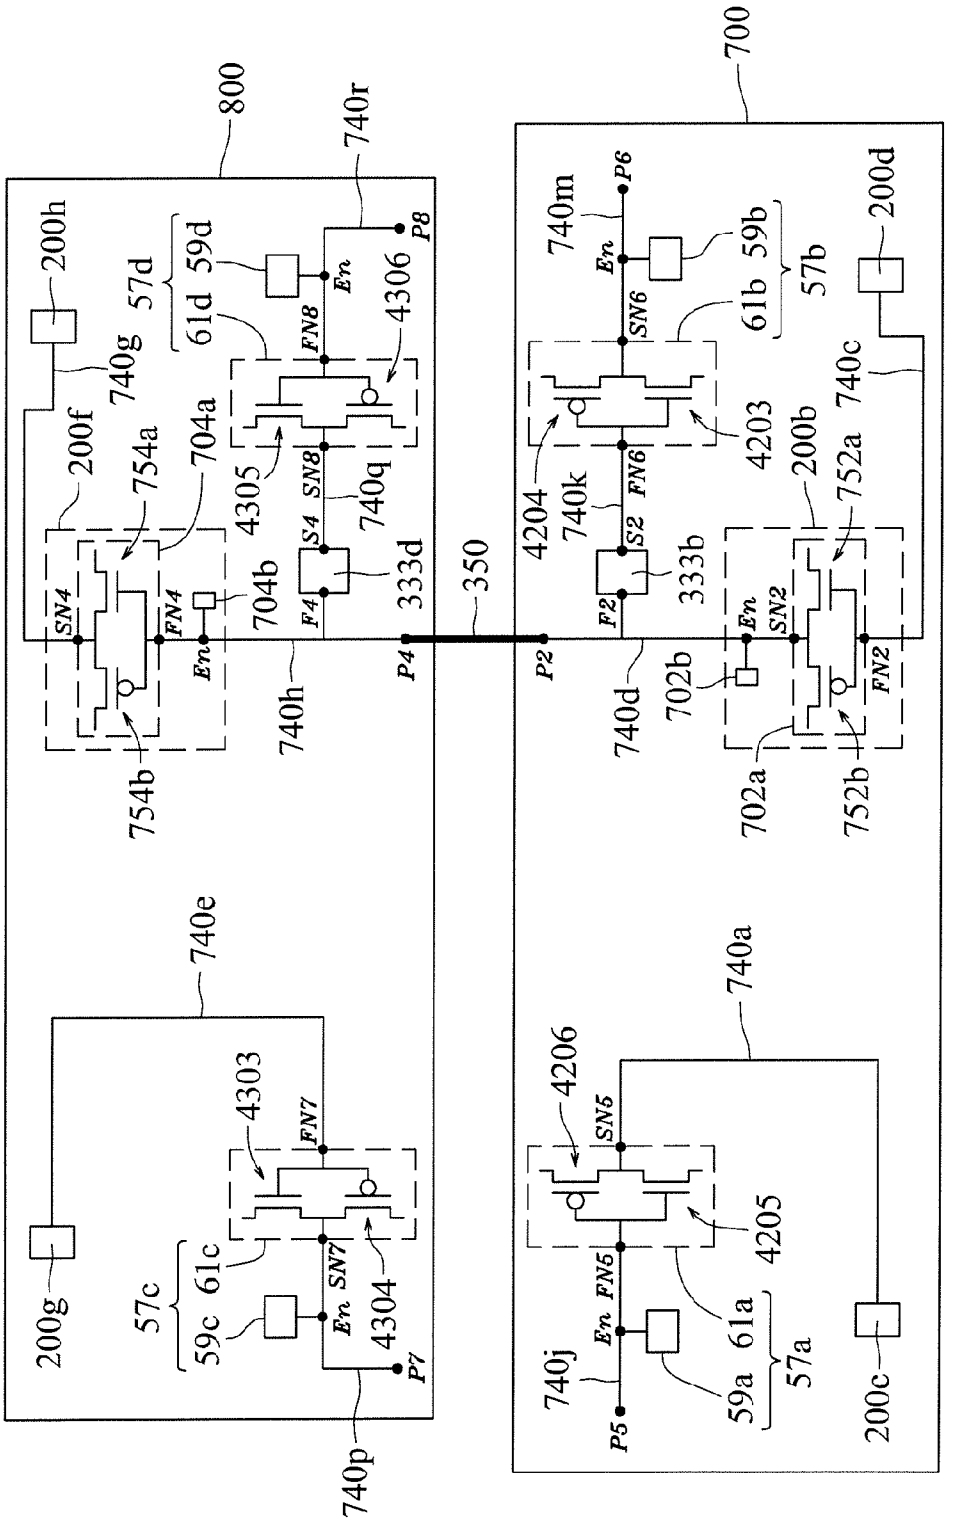

800
700
200h
57d
59d
61d
740r
P8
740g
200f
754a
704a
4305
740q
4306
FN8
En
SN8
S4
SN4
FN4
704b
F4
333d
350
740h
P4
P2
754b
4204
740k
740m
P6
SN6
61b
59b
57b
200d
740c
4203
200b
752a
S2
FN6
F2
333b
En
SN2
FN2
740d
702b
702a
752b
740e
4303
FN7
200g
57c
61c
59c
SN7
En
4304
P7
740p
740a
4206
SN5
4205
740j
FN5
En
59a
61a
57a
P5
200c

Fig. 294

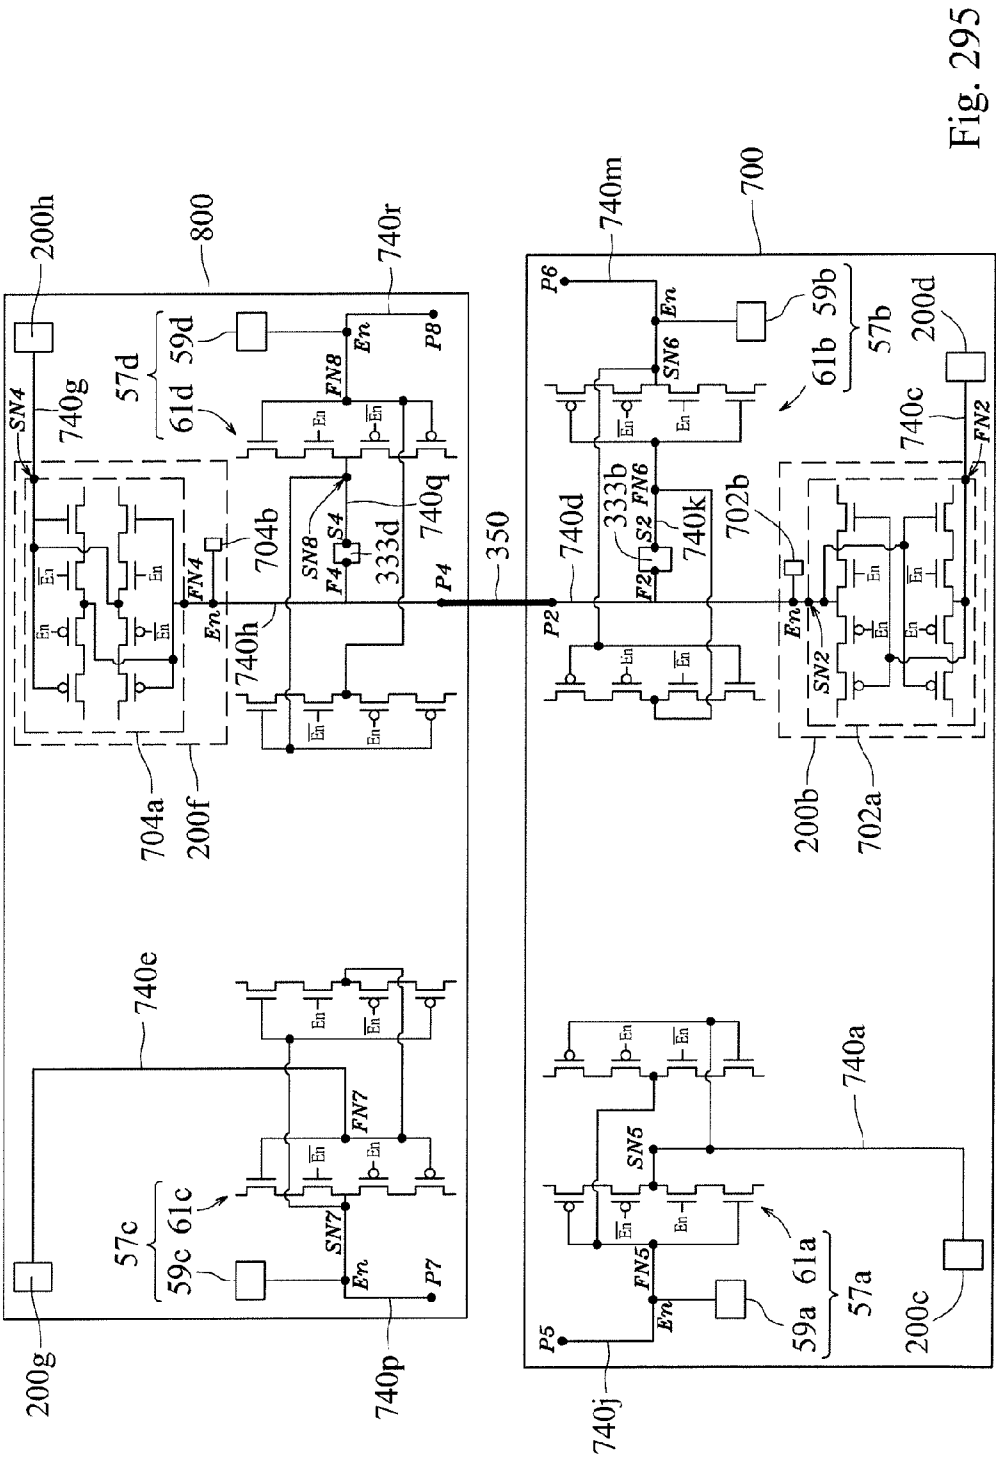

200h
800
740r
740m
700
740g
57d
61d 59d
61b 59b
57b
200d
704b
333d
740q
350
740d
333b
740k
702b
740c
704a
200f
740h
200b
702a
740e
740a
57c
59c 61c
57a
59a 61a
200g
740p
740j
200c
SN4
FN4
SN8
FN8
S4
F4
P4
P8
P6
SN6
FN6
S2
F2
P2
FN2
SN2
FN7
SN7
P7
SN5
FN5
P5
En

Fig. 295

Fig. 296

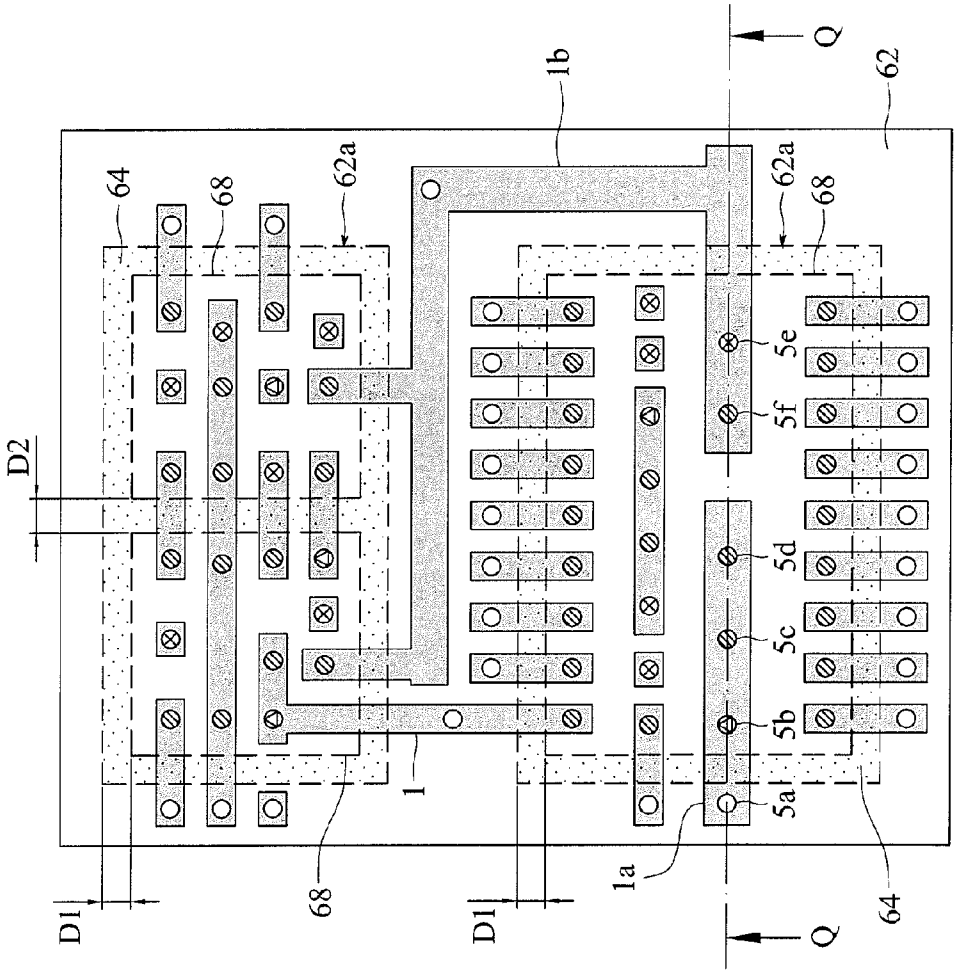
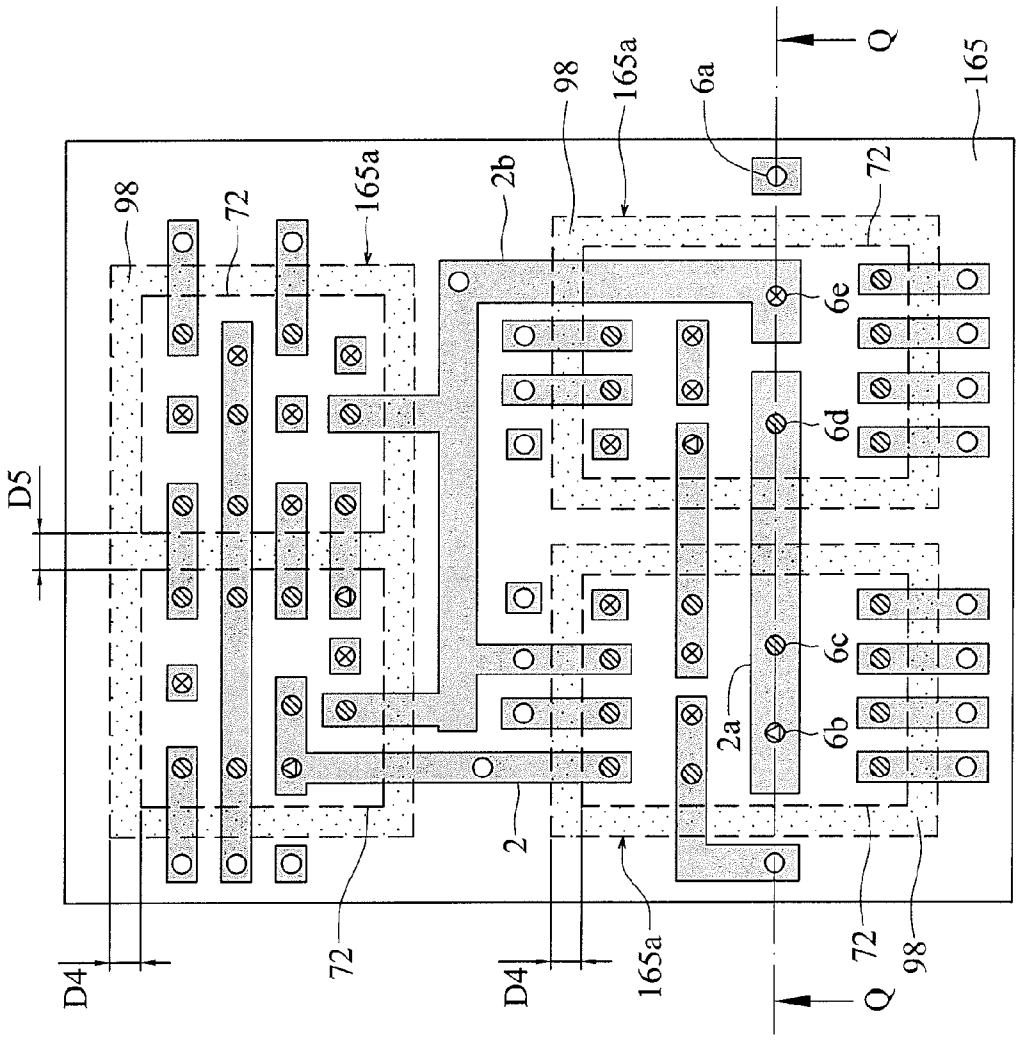


Fig. 297



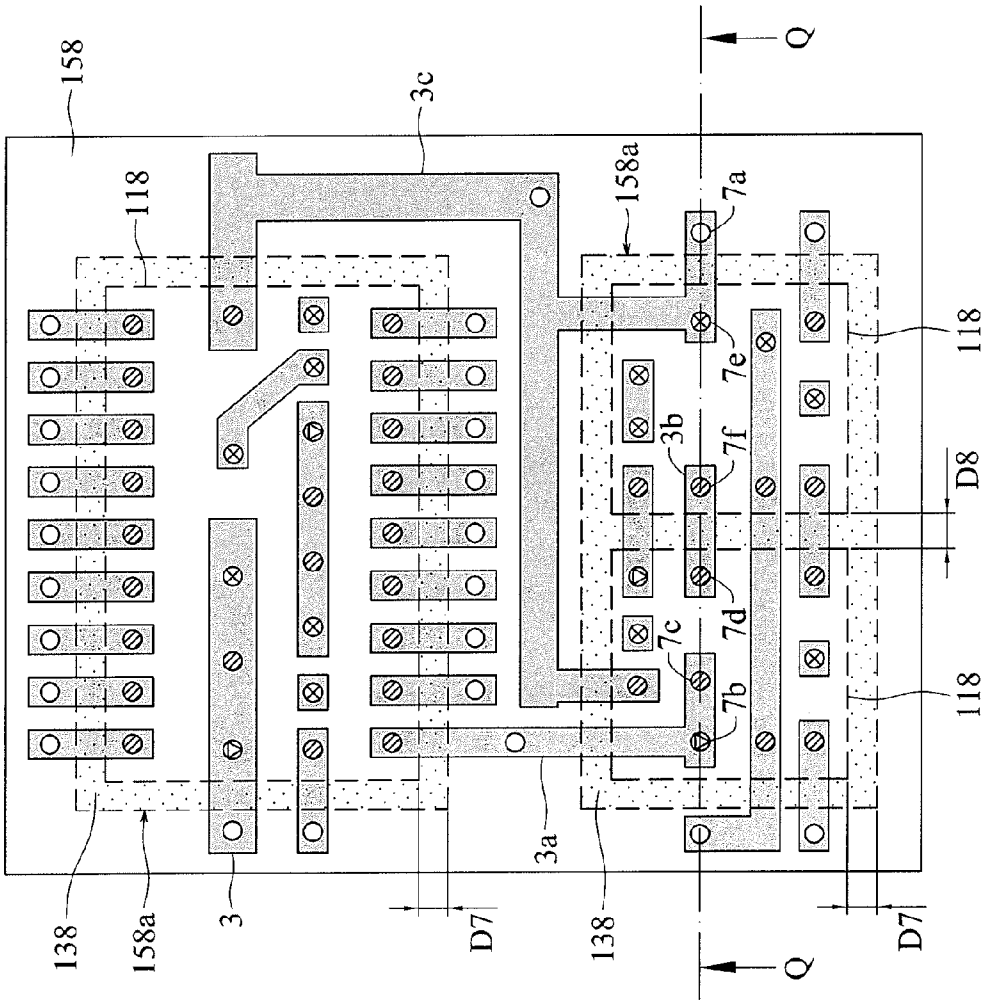

158
3c
118
158a
7a
Q
7e
118
3b
7f
D8
7d
7c
7b
118
3a
138
158a
3
D7
138
Q
D7

Fig. 298

SYSTEM-IN PACKAGES

RELATED APPLICATION

[0001] This application claims priority to U.S. provisional application No. 61/229,756, filed on Jul. 30, 2009, which is incorporated herein by reference in its entirety.

BACKGROUND OF THE DISCLOSURE

[0002] 1. Field of the Disclosure

[0003] The disclosure relates to system-in packages, and more particularly, to system-in packages that include through vias formed in stacked chips and in stacked dummy substrates and utilize metal plugs formed in the through vias for electrical interconnection between the stacked chips.

[0004] 2. Brief Description of the Related Art

[0005] Semiconductor wafers are processed to produce IC (integrated circuit) chips having ever-increasing device density and shrinking feature geometries. Multiple conductive and insulating layers are required to enable the interconnection and isolation of the large number of semiconductor devices in different layers. Such large scale integration results in an increasing number of electrical connections between various layers and semiconductor devices. It also leads to an increasing number of leads to the resultant IC chip. These leads are exposed through a passivation layer of the IC chip, terminating in I/O pads that allow connections to external contact structures in a chip package.

[0006] Wafer-Level Packaging (WLP) commonly refers to the technology of packaging an IC chip at wafer level, instead of the traditional process of assembling the package of each individual unit after wafer dicing. WLP allows for the integration of wafer fabrication, packaging, test, and burn-in at the wafer level, before being singulated by dicing for final assembly into a chip carrier package, e.g., a ball grid array (BGA) package. The advantages offered by WLP include less size (reduced footprint and thickness), lesser weight, relatively easier assembly process, lower overall production costs, and improvement in electrical performance. WLP therefore streamlines the manufacturing process undergone by a device from silicon start to customer shipment. While WLP is a high throughput and low cost approach to IC chip packaging, it however invites significant challenges in manufacturability and structural reliability.

SUMMARY OF THE DISCLOSURE

[0007] The present disclosure is directed to a system-in package or multichip module that include multi-layer chips and multi-layer dummy substrates over a carrier, multiple through vias blindly or completely through the multi-layer chips and completely through the multi-layer dummy substrates, multiple metal plugs in the through vias, and multiple metal interconnects, connected to the metal plugs, between the multi-layer chips. The multi-layer chips can be connected to each other or to an external circuit of the system-in package or multichip module, such as mother board, ball grid array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the metal plugs and the metal interconnects.

[0008] Exemplary embodiments of the present disclosure provide system-in packages or multichip modules having multi-layer chips and using metal plugs blindly or completely through the multi-layer chips for inter-chip interconnection or intra-chip interconnection. In one aspect, the invention is directed to a system-in package comprising a carrier, and a first chip over said carrier, wherein said first chip comprises a first semiconductor substrate having a thickness between 1 and 50 micrometers, a first metal layer under a bottom surface of said first semiconductor substrate, and a dielectric layer under said bottom surface of said first semiconductor substrate and over said first metal layer. The system-in package further includes a second chip over said carrier, wherein said second chip comprises a second semiconductor substrate, wherein said second semiconductor substrate has a top surface substantially coplanar with a top surface of said first semiconductor substrate, wherein said second chip is separated from said first chip. Also included are a gap filling material disposed in a gap between said first chip and said second chip, a first metal plug in said first chip, wherein said first metal plug passes through said first semiconductor substrate and said dielectric layer and contacts said first metal layer, and a first insulating material enclosing said first metal plug, wherein said first insulating material is enclosed by said first semiconductor substrate. The system-in package further includes a first dielectric structure on said top surface of said first semiconductor substrate, on said top surface of said second semiconductor substrate, and on said gap filling material, and a first metal interconnect in said first dielectric structure and over said first chip, wherein said first metal interconnect is connected to said first metal plug. Also included in the system-in package are a third chip over said first dielectric structure and over said first metal interconnect, wherein said third chip comprises a third semiconductor substrate having a thickness between 1 and 50 micrometers, and a second metal plug in said third chip, wherein said second metal plug passes through said third chip and contacts said first metal interconnect. The system-in package further includes a second insulating material enclosing said second metal plug, wherein said second insulating material is enclosed by said third semiconductor substrate, a second dielectric structure on a top surface of said third semiconductor substrate, and a second metal interconnect in said second dielectric structure and over said third chip, wherein said second metal interconnect is connected to said second metal plug.

[0009] Furthermore, exemplary embodiments can provide for ease for manufacturing multi-layer chip integration.

[0010] Furthermore, exemplary embodiments can provide dummy substrates placed between chips to achieve good uniformity of silicon thinning.

[0011] These, as well as other components, steps, features, benefits, and advantages of the present disclosure, will now become clear from a review of the following detailed description of illustrative embodiments, the accompanying drawings, and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The drawings disclose illustrative embodiments of the present disclosure. They do not set forth all embodiments. Other embodiments may be used in addition or instead. Details that may be apparent or unnecessary may be omitted to save space or for more effective illustration. Conversely, some embodiments may be practiced without all of the details that are disclosed. When the same numeral appears in different drawings, it refers to the same or like components or steps.

[0013] Aspects of the disclosure may be more fully understood from the following description when read together with the accompanying drawings, which are to be regarded as illustrative in nature, and not as limiting. The drawings are not

necessarily to scale, emphasis instead being placed on the principles of the disclosure. In the drawings:

[0014] FIGS. **1-82** show a process for forming a system-in package or multichip module according to an exemplary embodiment of the present disclosure;

[0015] FIG. **83** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0016] FIG. **84** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0017] FIG. **85** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0018] FIGS. **86** and **87** are cross-sectional views showing a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0019] FIG. **88** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0020] FIGS. **89-103** show a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0021] FIG. **104** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0022] FIG. **105** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0023] FIG. **106** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0024] FIGS. **107** and **108** are cross-sectional views showing a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0025] FIG. **109** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0026] FIGS. **110-128** show a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0027] FIG. **129** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0028] FIG. **130** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0029] FIG. **131** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0030] FIG. **132** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0031] FIGS. **133-136** show a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0032] FIG. **137** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0033] FIG. **138** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0034] FIG. **139** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0035] FIG. **140** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0036] FIGS. **141**A-**141**J show a process for forming chips according to an embodiment of the present disclosure;

[0037] FIG. **141**K shows cross-sectional views of chips according to an embodiment of the present disclosure;

[0038] FIG. **141**L shows cross-sectional views of chips according to an embodiment of the present disclosure;

[0039] FIGS. **142-181** show a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0040] FIG. **182** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0041] FIG. **183** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0042] FIG. **184** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0043] FIG. **185** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0044] FIGS. **186-207** show a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0045] FIG. **208** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0046] FIG. **209** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0047] FIG. **210** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0048] FIG. **211** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0049] FIGS. **212**A-**212**L show a process for forming chips according to an embodiment of the present disclosure;

[0050] FIG. **212**M shows cross-sectional views of chips according to an embodiment of the present disclosure;

[0051] FIG. **212**N shows cross-sectional views of chips according to an embodiment of the present disclosure;

[0052] FIGS. **213-250** show a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0053] FIG. **251** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0054] FIG. **252** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0055] FIG. **253** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0056] FIG. **254** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0057] FIGS. **255-270** show a process for forming a system-in package or multichip module according to an embodiment of the present disclosure;

[0058] FIG. **271** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0059] FIG. **272** shows a cross-sectional view of a system-in package or multichip module according to an embodiment of the present disclosure;

[0060] FIG. **273** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0061] FIG. **274** shows a cross-sectional view of a multichip package according to an embodiment of the present disclosure;

[0062] FIGS. **275**A-**275**L show another process for forming the structure shown in FIG. **26**;

[0063] FIGS. **276** and **285** are circuit diagrams each showing interface circuits between two chips according to an embodiment of the present disclosure;

[0064] FIGS. **277** and **280** show inter-chip circuits each including a two-stage cascade inter-chip receiver and an inter-chip ESD (electro static discharge) circuit according to an embodiment of the present disclosure;

[0065] FIGS. **278** and **279** show inter-chip circuits each including a two-stage cascade inter-chip driver and an inter-chip ESD (electro static discharge) circuit according to an embodiment of the present disclosure;

[0066] FIGS. **281** and **284** show two-stage cascade off-chip receivers according to an embodiment of the present disclosure;

[0067] FIGS. **282** and **283** show two-stage cascade off-chip drivers according to an embodiment of the present disclosure;

[0068] FIGS. **286-291** show a method for calculating an active area of an ESD unit of a chip and define a size of an ESD circuit composed of one or more of the ESD units according to an embodiment of the present disclosure;

[0069] FIGS. **292** and **293** show a method for defining or calculating a physical channel width and a physical channel length of a MOS transistor according to an embodiment of the present disclosure;

[0070] FIGS. **294** and **295** are circuit diagrams each showing interface circuits between two chips, according to an embodiment of the present disclosure; and

[0071] FIG. **296** is a schematic top perspective view showing the arrangement of a bottom tier of chips, a dummy substrate, metal plugs and metal interconnects of a system-in package or multichip module according to an embodiment of the present disclosure;

[0072] FIG. **297** is a schematic top perspective view showing the arrangement of a middle tier of chips, a dummy substrate, metal plugs and metal interconnects of a system-in package or multichip module according to an embodiment of the present disclosure; and

[0073] FIG. **298** is a schematic top perspective view showing the arrangement of a top tier of chips, a dummy substrate, metal plugs and metal interconnects of a system-in package or multichip module according to an embodiment of the present disclosure.

[0074] While certain embodiments are depicted in the drawings, one skilled in the art will appreciate that the embodiments depicted are illustrative and that variations of those shown, as well as other embodiments described herein, may be envisioned and practiced within the scope of the present disclosure.

DETAILED DESCRIPTION OF THE INVENTION

[0075] Illustrative embodiments are now described. Other embodiments may be used in addition or instead. Details that may be apparent or unnecessary may be omitted to save space or for a more effective presentation. Conversely, some embodiments may be practiced without all of the details that are disclosed.

[0076] FIGS. **1-82** show a process for forming a system-in package or multichip module according to an exemplary embodiment of the present disclosure.

[0077] Referring to FIG. **1**, a dummy substrate **62** can be attached onto a carrier **11**, e.g., by the following steps. First, a glue layer **22** having a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers, can be formed on a top surface of the carrier **11** or on a bottom surface of the dummy substrate **62** by using, e.g., a spin coating process, a lamination process, a spraying process, a dispensing process, or a screen printing process. Next, the glue layer **22** can be optionally pre-cured or baked. Next, the dummy substrate **62** can be placed over the carrier **11** with the glue layer **22** between the carrier **11** and the dummy substrate **62**. Next, the glue layer **22** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **22**. Accordingly, the dummy substrate **62** can be joined with the carrier **11** using the glue layer **22**. The glue layer **22** can be a polymer layer, such as a layer of epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or silosane, with a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers.

[0078] Alternatively, the glue layer **22** can be replaced with a silicon-oxide layer that can be formed on the dielectric or insulating layer **20** of the carrier **11**. In this case, the dummy substrate **62** can be joined with the carrier **11**, e.g., by bonding a silicon-oxide layer of the dummy substrate **62** onto the silicon-oxide layer **22**. The silicon-oxide layer of the dummy substrate **62** contacts the silicon-oxide layer **22**.

[0079] The dummy substrate **62** can, for example, be a round wafer, a dummy silicon wafer, a rectangular panel, or a substrate of polysilicon, glass, silicon or ceramic. The dummy substrate **62**, before being ground or polished as mentioned in the following processes, may have a thickness, e.g., greater than 100 micrometers, such as between 100 and 1,500 micrometers, and preferably between 200 and 500 micrometers or between 100 and 300 micrometers.

[0080] In one embodiment, there are no circuits preformed in the dummy substrate **62** or on a top or bottom surface of the dummy substrate **62** before the dummy substrate **62** is joined with the carrier **11**. The dummy substrate **62** may have a top surface with a profile that is substantially same as that of a top surface of the carrier **11**.

[0081] The carrier **11** can be a wafer, a panel, a print circuit board (PCB), or an organic ball-grid-array (BGA) substrate, and the carrier **11** can include a substrate **10**, a dielectric layer **12** on a top side of the substrate **10**, a conductive layer **18** on the dielectric layer **12**, and a dielectric or insulating layer **20** on the conductive layer **18**. The substrate **10** can be a silicon substrate, a glass substrate, a ceramic substrate, an aluminum

substrate, a copper substrate, or an organic polymer substrate. The substrate **10** can have a thickness, e.g., between 10 and 1,000 micrometers, between 10 and 100 micrometers, or between 100 and 500 micrometers. The dielectric layer **12** can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), silicon oxycarbide (such as SiOC), or polymer (such as polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), epoxy, or silosane). The dielectric layer **12** may have a thickness, e.g., between 0.3 and 30 micrometers, and preferably between 1 and 10 micrometers. The conductive layer **18**, for example, can be a patterned metal layer, and the patterned metal layer may include an adhesion/barrier layer, such as a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel or nickel vanadium, with a thickness, e.g., between 1 nanometer and 0.5 micrometers, a sputtered seed layer, such as a layer of copper, silver, gold, or a titanium-copper alloy, with a thickness, e.g., between 10 nanometers and 0.8 micrometers on the adhesion/barrier layer, and an electroplated metal layer, such as a layer of copper, silver or gold with a thickness, e.g., between 10 nanometers and 2 micrometers, and preferably between 50 nanometers and 1 micrometer, or with a thickness, e.g., between 2 and 30 micrometers, and preferably between 3 and 10 micrometers, on the sputtered seed layer. The dielectric or insulating layer **20**, for example, can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), silicon oxycarbide (such as SiOC), solder mask, or polymer (such as polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), epoxy, or silosane). The thickness of the dielectric or insulating layer **20** above the conductive layer **18** may be in the range between 0.3 and 30 micrometers, and preferably between 1 and 10 micrometers.

[0082] In a first embodiment, the carrier **11** can be a round wafer including the silicon substrate **10**, multiple active devices, such as transistors, in and/or over the silicon substrate **10**, the dielectric layer **12** on the silicon substrate **10**, the patterned metal layer **18** on the dielectric layer **12**, and the dielectric or insulating layer **20**, such as a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon oxynitride (such as SiON), silicon oxycarbide (such as SiOC), silicon carbon nitride (such as SiCN), or polymer (such as polyimide, benzocyclobutene, polybenzoxazole, or poly-phenylene oxide), on the patterned metal layer **18**.

[0083] In a second embodiment, the carrier **11** can be a round wafer including the silicon substrate **10**, multiple passive devices, such as resistors, inductors or capacitors, in and/or over the silicon substrate **10**, the dielectric layer **12** on the silicon substrate **10**, the patterned metal layer **18** on the dielectric layer **12**, and the dielectric or insulating layer **20**, such as a layer of silicon oxide (such as SiO2), silicon nitride (such as Si3N4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), silicon oxycarbide (such as SiOC), or polymer (such as polyimide, benzocyclobutene, polybenzoxazole, or poly-phenylene oxide), on the patterned metal layer **18** and over the passive devices, but not including any active device, such as transistor, in and/or over the silicon substrate **10**.

[0084] In a third embodiment, the carrier **11** can be a rectangular panel including the glass substrate **10**, the dielectric layer **12** on the glass substrate **10**, the conductive layer **18**, such as indium-tin-oxide (ITO) layer, on the dielectric layer **12**, and the dielectric or insulating layer **20** on the conductive layer **18**.

[0085] In a fourth embodiment, the carrier **11** can be a print circuit board (PCB) or an organic ball-grid-array (BGA) substrate including the organic polymer substrate **10**, the dielectric layer **12** on the organic polymer substrate **10**, the patterned metal layer **18** on the dielectric layer **12**, and the dielectric or insulating layer **20**, such as a layer of solder mask or polymer (such as epoxy), on the patterned metal layer **18**.

[0086] Alternatively, the carrier **11** can be formed without the layers **12**, **18** and **20** over the substrate **10**, i.e., the carrier **11** only has the substrate **10** without any circuit in the carrier **11**. In this case, the layer **22** can be directly formed on the substrate **10**.

[0087] Next, referring to FIG. **2**, a photoresist layer **172** can be formed on the dummy substrate **62** by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, referring to FIG. **3**, a photo exposure process and a development process can be employed to form multiple openings **172***a*, exposing multiple regions of the dummy substrate **62**, in the photoresist layer **172**. The photoresist layer **172**, after the photo exposure process and the development process, may have a thickness, e.g., between 10 and 200 micrometers. FIG. **4** shows a schematic top view of the photoresist layer **172** with the openings **172***a* as shown in FIG. **3**, and FIG. **3** can be a cross-sectional view cut along the line A-A shown in FIG. **4**.

[0088] Next, referring to FIG. **5**, multiple openings **62***a* are formed in the dummy substrate **62** and under the openings **172***a* in the photoresist layer **172**, exposing the glue layer **22**, using a chemical etching process or a plasma etching process, and then the patterned photoresist layer **172** is removed by using, e.g., an organic chemical. Alternatively, when the glue layer **22** is replaced with the silicon-oxide layer and the dummy substrate **62** has the silicon-oxide layer bonded with the silicon-oxide layer **22**, the openings **62***a* are formed in the dummy substrate **62** and under the openings **172***a* in the photoresist layer **172**, exposing the silicon-oxide layer of the dummy substrate **62**, using a chemical etching process or a plasma etching process, and then the patterned photoresist **172** is removed by using, e.g., an organic chemical. FIG. **6** shows a schematic top view of the dummy substrate **62** with the openings **62***a* as shown in FIG. **5**, and FIG. **5** can be a cross-sectional view cut along the line B-B shown in FIG. **6**.

[0089] Alternatively, a hard mask (not shown), such as silicon oxide or silicon nitride, may be formed on the dummy substrate **62** shown in FIG. **5**, e.g., by the following steps. First, the hard mask of silicon oxide or silicon nitride can be formed on the dummy substrate **62** shown in FIG. **1**. Next, the photoresist layer **172** can be formed on the hard mask by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **172***a*, exposing multiple regions of the hard mask, in the photoresist layer **172**. Next, multiple openings are formed in the hard mask and under the openings **172***a* in the photoresist layer **172**, exposing multiple regions of the dummy substrate **62**, by using, e.g., a wet etching process or a plasma etching process. Next, the patterned photoresist layer **172** can be removed by using, e.g., an organic chemical. Next, multiple openings **62***a* are formed in the dummy substrate **62** and under the openings in the hard mask, exposing the glue layer **22**, by using, e.g., a chemical etching process or a plasma

IPR2026-00067
TSMC EX1019 Page 249

etching process. Alternatively, when the glue layer **22** is replaced with the silicon-oxide layer and the dummy substrate **62** has the silicon-oxide layer bonded with the silicon-oxide layer **22**, the openings **62***a* are formed in the dummy substrate **62** and under the openings in the hard mask, exposing the silicon-oxide layer of the dummy substrate **62**, by using, e.g., a chemical etching process or a plasma etching process. The hard mask will be removed by the following grinding or polishing process.

[0090] Next, referring to FIG. **7**, multiple chips **68** are mounted over the carrier **11** and in the openings **62***a* in the dummy substrate **62**, and the chips **68** have active sides at bottoms of the chips **68** and backsides at tops of the chips **68**. In one case, one of the chips **68** may have different circuit designs from those of another one of the chips **68**. Also, in another case, one of the chips **68** may have same circuit designs as those of another one of the chips **68**. Alternatively, one of the chips **68** may have a different area (top surface) or size from that of another one of the chips **68**. Also, in another case, one of the chips **68** may have a same area (top surface) or size as that of another one of the chips **68**. FIG. **8** is an example of a schematical top view showing the chips **68** mounted in the openings **62***a* in the dummy substrate **62**, and FIG. **7** is a cross-sectional view cut along the line C-C shown in the schematical top view of FIG. **8**.

[0091] Mounting the chips **68** over the carrier **11** and in the openings **62***a* can be performed, e.g., by first forming a glue material (not shown) on the active sides of the chips **68** or on the glue layer **22**, next placing the chips **68** in the openings **62***a* and over the glue layer **22** with the glue material contacting the glue layer **22**, and then curing the glue material in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue material. Accordingly, the chips **68** can be joined with the carrier **11** using the glue material.

[0092] Each of the chips **68** can include a semiconductor substrate **58**, multiple semiconductor devices **36** in and/or on the semiconductor substrate **58**, a passivation layer **24** under the semiconductor substrate **58**, multiple dielectric layers **42**, **44**, **46** and **48** between the semiconductor substrate **58** and the passivation layer **24**, a patterned metal layer **26** between the semiconductor substrate **58** and the passivation layer **24**, an interconnection layer **34** between the semiconductor substrate **58** and the passivation layer **24**, multiple via plugs **26***a* in the dielectric layer **44**, and multiple via plugs **34***a* in the dielectric layer **48**. The semiconductor substrate **58** is at the backside of each chip **68**, and the semiconductor devices **36**, the passivation layer **24**, the patterned metal layer **26**, the interconnection layer **34**, the dielectric layers **42**, **44**, **46** and **48**, and the via plugs **26***a* and **34***a* are at the active side of each chip **68**.

[0093] The semiconductor substrate **58** can be a suitable substrate, such as silicon substrate, silicon-germanium (SiGe) substrate, or gallium-arsenide (GaAs) substrate. The semiconductor substrate **58** before being thinned as mentioned in the following processes may have a thickness, e.g., greater than 100 micrometers, such as between 100 and 500 micrometers, and preferably between 150 and 250 micrometers or between 100 and 300 micrometers.

[0094] Each of the semiconductor devices **36** can be a P-channel metal-oxide-semiconductor (PMOS) transistor, an N-channel metal-oxide-semiconductor (NMOS) transistor, a bipolar transistor, or a double-diffused metal-oxide-semiconductor (DMOS) transistor. Each of the semiconductor devices **36** can be provided for a NOR gate, a NAND gate, an AND gate, an OR gate, a flash memory cell, a static-random-access-memory (SRAM) cell, a dynamic-random-access-memory (DRAM) cell, a non-volatile memory cell, an erasable programmable read-only memory (EPROM) cell, a read-only memory (ROM) cell, a magnetic-random-access-memory (MRAM) cell, a sense amplifier, an inverter, an operational amplifier, an adder, a multiplexer, a diplexer, a multiplier, an analog-to-digital (A/D) converter, a digital-to-analog (D/A) converter, an analog circuit, a complementary-metal-oxide-semiconductor (CMOS) sensor, or a charge coupled device (CCD).

[0095] The passivation layer **24** may include or can be an inorganic dielectric layer having a bottom surface attached to the glue layer **22**, and the inorganic dielectric layer can be a layer of silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN) or silicon oxynitride (such as SiON) with a thickness, e.g., between 0.3 and 1.5 micrometers. Alternatively, each of the chips **68** may further contain an organic polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), epoxy, or silosane, with a thickness, e.g., greater than 3 micrometers, such as between 3 and 20 micrometers, and preferably between 5 and 12 micrometers, under and on the bottom surface of the inorganic dielectric layer of the passivation layer **24**. In this case, the organic polymer layer has a bottom surface attached to the glue layer **22**. The organic polymer layer has a top surface contacting the bottom surface of the inorganic dielectric layer of the passivation layer **24**.

[0096] Alternatively, multiple openings (not shown) each having a width, e.g., between 0.5 and 100 micrometers, and preferably between 20 and 60 micrometers, may be formed in the passivation layer **24** and expose multiple contact points of the patterned metal layer **26**.

[0097] The dielectric layer **42** can be between the passivation layer **24** and the dielectric layer **44**. The dielectric layer **44** can be between the dielectric layers **42** and **46** and between the layers **26** and **34**. The dielectric layer **46** can be between the dielectric layers **44** and **48**. Each of the dielectric layers **42**, **44** and **46** may include silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), silicon oxycarbide (such as SiOC), or a low-k material having a dielectric constant between 1.8 and 3 (such as fluorinated silicate glass (FSG) or Black-diamond). Each of the dielectric layers **42**, **44** and **46** may have a thickness, e.g., between 10 nanometers and 2 micrometers or between 50 nanometers and 1 micrometer.

[0098] The dielectric layer **48** between the dielectric layer **46** and the semiconductor substrate **58** and between the interconnection layer **34** and the semiconductor substrate **58** may include or can be a layer of phosphorous silicate glass (PSG), borophospho-silicate glass (BPSG), silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or a low-k material having a dielectric constant between 1.8 and 3 (such as fluorinated silicate glass (FSG) or Black-diamond). The dielectric layer **48** may have a thickness, e.g., between 10 nanometers and 1 micrometer.

[0099] The patterned metal layer **26**, for example, may include an aluminum-copper-alloy layer having a thickness, e.g., between 0.3 and 3 micrometers and a titanium-containing layer having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers. The tita-

nium-containing layer can be between the dielectric layer **44** and the aluminum-copper-alloy layer and on the aluminum-copper-alloy layer, and the aluminum-copper-alloy layer can be between the passivation layer **24** and the titanium-containing layer. The titanium-containing layer can be a single layer of titanium, titanium nitride, or a titanium-tungsten alloy having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers.

[0100] Alternatively, the patterned metal layer **26** may include a nickel layer having a thickness, e.g., between 0.5 and 3 micrometers and a gold layer having a thickness, e.g., between 0.01 and 1 micrometers under and on the nickel layer, in the view from the side of the dielectric layer **44** to the side of the passivation layer **24**. The nickel layer is between the dielectric layer **44** and the gold layer, and the gold layer is between the nickel layer and the passivation layer **24**.

[0101] Alternatively, the patterned metal layer **26** can be formed by a damascene or double-damascene process including an electroplating process and a chemical mechanical polishing (CMP) process and can be composed of an electroplated copper layer having a bottom contacting the passivation layer **24**, an adhesion/barrier metal layer at a top and sidewalls of the electroplated copper layer, and a seed layer between the electroplated copper layer and the adhesion/barrier metal layer and on the top and sidewalls of the electroplated copper layer. The adhesion/barrier metal layer has a first portion between the top of the electroplated copper layer and the dielectric layer **44** and a second portion at the sidewalls of the electroplated copper layer. The electroplated copper layer may have a thickness, e.g., smaller than 1.5 micrometers, such as between 0.15 and 1.2 micrometers, or smaller than 3 micrometers, such as between 0.3 and 3 micrometers. The electroplated copper layer may have a width, e.g., smaller than 1 micrometer, such as between 0.05 and 1 micrometers. The seed layer may include or can be a layer of copper or a titanium-copper alloy formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum or tantalum nitride formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may have a thickness, e.g., smaller than 0.1 micrometers, such as between 0.005 and 0.1 micrometers. The sidewalls of the electroplated copper layer are covered by the adhesion/barrier metal layer and the seed layer.

[0102] The interconnection layer **34**, for example, may include carbon nanotube. Alternatively, the interconnection layer **34** can be composed of a patterned metal layer in the dielectric layer **46**. In a first alternative, the patterned metal layer **34** may include an aluminum-copper-alloy layer having a thickness, e.g., between 10 nanometers and 2 micrometers and a titanium-containing layer, such as a single layer of titanium nitride, titanium-tungsten alloy or titanium, having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers. The titanium-containing layer can be between the dielectric layer **48** and the aluminum-copper-alloy layer and on the aluminum-copper-alloy layer, and the aluminum-copper-alloy layer can be in the dielectric layer **46**. In a second alternative, the patterned metal layer **34** can be formed by a damascene or double-damascene process including an electroplating process and a chemical mechanical polishing (CMP) process and can be composed of an electroplated copper layer having a bottom contacting the dielectric layer **44**, an adhesion/barrier metal layer at a top and sidewalls of the electroplated copper layer, and a seed layer between the electroplated copper layer and the adhesion/barrier metal layer and on the top and sidewalls of the electroplated copper layer. The adhesion/barrier metal layer has a first portion between the top of the electroplated copper layer and the dielectric layer **48** and a second portion at the sidewalls of the electroplated copper layer. The electroplated copper layer may have a thickness, e.g., smaller than 2 micrometers, such as between 0.15 and 1 micrometers or between 10 nanometers and 2 micrometers. The electroplated copper layer may have a width, e.g., smaller than 1 micrometer, such as between 0.05 and 1 micrometers. The seed layer may include or can be a layer of copper or a titanium-copper alloy formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum or tantalum nitride formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may have a thickness, e.g., smaller than 0.1 micrometers, such as between 0.005 and 0.1 micrometers. The sidewalls of the electroplated copper layer are covered by the adhesion/barrier metal layer and the seed layer.

[0103] The patterned metal layer **26** in the dielectric layer **42** can be connected to the interconnection layer **34** in the dielectric layer **46** through the via plugs **26***a* in the dielectric layer **44**. The interconnection layer **34** in the dielectric layer **46** can be connected to the semiconductor devices **36** through the via plugs **34***a* in the dielectric layer **48**. The via plugs **26***a* may include electroplated copper, tungsten, or carbon nanotube in the dielectric layer **44**. The via plugs **34***a* may include electroplated copper, tungsten, or carbon nanotube in the dielectric layer **48**.

[0104] Each of the chips **68** may include multiple interconnects or metal traces **35***a*, **35***b*, **35***c* and **35***d* provided by the patterned metal layer **26**, the interconnection layer **34** and the via plugs **26***a* and **34***a*. Each of the interconnects or metal traces **35***a*, **35***b*, **35***c* and **35***d* can be connected to one or more of the semiconductor devices **36** and can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0105] Alternatively, each of the chips **68** may further include a patterned metal layer (not shown), having a thickness greater than that of the patterned metal layer **26** and greater than that of the interconnection layer **34**, between the glue layer **22** and the passivation layer **24**. The patterned metal layer under the passivation layer **24** may include an electroplated metal layer under the passivation layer **24**, an adhesion/barrier metal layer between the electroplated metal layer and the passivation layer **24**, and a seed layer between the electroplated metal layer and the adhesion/barrier metal layer. In the view from the side of the passivation layer **24** to the side of the glue layer **22**, the adhesion/barrier metal layer can be on the seed layer, and the seed layer can be on the electroplated metal layer. Sidewalls of the electroplated metal layer are not covered by the adhesion/barrier metal layer and the seed layer. The adhesion/barrier metal layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride or nickel with a thickness, e.g., smaller than 0.6 micrometers, such as between 1 nanometer and 0.5 micrometers or between 0.005 and 0.1 micrometers. The seed layer may include or can be a layer of copper, a titanium-copper alloy, silver, gold, or nickel with a thickness, e.g., smaller than 0.8 micrometers, such as between 5 nanometers and 0.1 micrometers or between 10

nanometers and 0.8 micrometers. Each of the adhesion/barrier metal layer and the seed layer can be formed by a suitable process, such as sputtering process. The electroplated metal layer may include or can be a layer of electroplated copper, electroplated silver or electroplated gold with a thickness, e.g., greater than 2 micrometers, such as between 2 and 30 micrometers, and preferably between 3 and 10 micrometers or between 5 and 25 micrometers.

[0106] Alternatively, when the silicon-oxide layer of the dummy substrate **62** remains on the silicon-oxide layer **22**, after forming the openings **62***a*, and is exposed by the openings **62***a* in the dummy substrate **62**, mounting the chips **68** over the carrier **11** and in the openings **62***a* can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **24**, at the active side of each chip **68**, with the remaining silicon-oxide layer of the dummy substrate **62** under the passivation layer **24**. The silicon-oxide layer of the passivation layer **24** contacts the silicon-oxide layer of the dummy substrate **62**. Accordingly, the chips **68** can be joined with the carrier **11** using these silicon-oxide layers.

[0107] Alternatively, another technique to form the structure illustrated in FIGS. **7** and **8** is performed by first providing a patterned dummy substrate **62**, such as patterned dummy wafer, patterned panel, patterned silicon frame, or patterned substrate of polysilicon, glass, silicon, ceramic, or polymer, with multiple openings **62***a* passing through the patterned dummy substrate **62**, next joining the patterned dummy substrate **62** with the carrier **11** using the layer **22**, which can be referred to as the steps illustrated in FIG. **1**, and then mounting the chips **68** over the carrier **11** and in the openings **62***a* in the patterned dummy substrate **62**, which can be referred to as the steps illustrated in FIG. **7**.

[0108] As shown in FIGS. **7** and **8**, there are multiple gaps **4** each between the dummy substrate **62** and one of the chips **68**, and there are multiple gaps **8** (one of them is shown) each between neighboring two chips **68**. Each of the gaps **4** may have a transverse distance or spacing D**1**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8** may have a transverse distance or spacing D**2**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0109] FIG. **9** shows another technique to form the structure with the same cross-sectional view as shown in FIG. **7**. FIG. **7** is a cross-sectional view cut along the line C-C shown in a schematical top view of FIG. **9**. The structure shown in FIGS. **7** and **9** can be formed, e.g., by the following steps. First, the previously described glue layer **22** can be formed on the previously described carrier **11** by using, e.g., a spin coating process, a laminating process, a spraying process, a dispensing process, or a screen printing process. The glue layer **22** can be formed on the dielectric or insulating layer **20** of the carrier **11** or formed on the substrate **10** of the carrier **11** if the carrier **11** is formed without the layers **12**, **18** and **20**. Next, the glue layer **22** can be optionally pre-cured or baked. Next, the previously described chips **68** and multiple separate dummy substrates **62** can be placed on the glue layer **22**. When a gap between neighboring two chips **68** is too great, such as greater than 500 or 1,000 micrometers, one or more of the separate dummy substrates **62** can be placed in the gap. Alternatively, when a gap between neighboring two chips **68** is small enough, such as smaller than 500 or 1,000 micrometers, there can be no separate dummy substrates **62** placed in the gap. Next, the glue layer **22** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **22**. Accordingly, the separate dummy substrates **62** and the chips **68** can be joined with the carrier **11** using the glue layer **22**. The separate dummy substrates **62**, for example, can be separate silicon bars, separate dummy chips, separate dummy silicon dies, or separate substrates of polysilicon, glass, silicon, or ceramic.

[0110] Alternatively, referring to FIGS. **7** and **9**, the glue layer **22** can be replaced with a silicon-oxide layer that is formed on the dielectric or insulating layer **20** of the carrier **11** or formed on the substrate **10** of the carrier **11** if the carrier **11** is formed without the layers **12**, **18** and **20**. In this case, joining the chips **68** with the carrier **11** and joining the separate dummy substrates **62** with the carrier **11** can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **24**, at the active side of each chip **68**, with the silicon-oxide layer **22** and by bonding another silicon-oxide layer of each of the separate dummy substrates **62** with the silicon-oxide layer **22**. The silicon-oxide layer of the passivation layer **24** of each chip **68** contacts the silicon-oxide layer **22**, and the silicon-oxide layer of each of the separate dummy substrates **62** contacts the silicon-oxide layer **22**. Accordingly, the chips **68** and the separate dummy substrates **62** can be joined with the carrier **11** using these silicon-oxide layers.

[0111] As shown in FIGS. **7** and **9**, there are multiple gaps **4** each between one of the chips **68** and one of the separate dummy substrates **62**, and there are multiple gaps **8** (one of them is shown) each between neighboring two chips **68**. Each of the gaps **4** may have a transverse distance or spacing D**1**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8** may have a transverse distance or spacing D**2**, e.g., smaller than 500 micrometers, such as between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. In one embodiment, there are no circuits preformed in each separate dummy substrate **62** or on a top or bottom surface of each separate dummy substrate **62** before the separate dummy substrates **62** are joined with the carrier **11**.

[0112] Referring to FIG. **10**, after the steps illustrated in FIGS. **7** and **8** or in FIGS. **7** and **9**, an encapsulation/gap filling material **64**, such as polysilicon, silicon oxide, or a polymer, can be formed on a backside of the semiconductor substrate **58** of each chip **68**, on the dummy substrate(s) **62**, and in the gaps **4** and **8**. If the encapsulation/gap filling material **64** is polysilicon, the polysilicon can be formed by a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. If the encapsulation/gap filling material **64** is silicon oxide, the silicon oxide can be formed by a chemical vapor deposition (CVD) process, a plasma-enhanced chemical vapor deposition (PECVD) process, or an atmospheric pressure chemical vapor deposition (APCVD) process. If the encapsulation/gap filling material **64** is a polymer, such as polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or polyphenylene oxide (PPO), the polymer can be formed by a process including a spin coating process, a dispensing process, a molding process, or a screen printing process.

[0113] Next, referring to FIG. **11**, the encapsulation/gap filling material **64**, the backside of the semiconductor sub-

strate **58** of each chip **68**, and the dummy substrate(s) **62** are ground or polished by, e.g., a chemical-mechanical-polishing (CMP) process, a mechanical polishing process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the semiconductor substrate **58** of one of the chips **68** is thinned to a thickness T**1**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Preferably, each of the chips **68**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. After the grinding or polishing process, the dummy substrate(s) **62** can be thinned to a thickness T**2**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **64** remaining in the gaps **4** and **8** may have a vertical thickness T**3**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the ground or polished surface(s) **62***s* of the dummy substrate(s) **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The ground or polished surface(s) **62***s* may be substantially coplanar with the ground or polished surface **58***s* of each chip **68** and with the ground or polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**.

[0114] Alternatively, FIGS. **12** and **13** show another technique to form the structure illustrated in FIG. **11**. Referring to FIG. **12**, after the steps illustrated in FIGS. **7** and **8** or in FIGS. **7** and **9**, an encapsulation/gap filling material **64**, such as polysilicon or silicon oxide, can be formed on the backside of the semiconductor substrate **58** of each chip **68**, on the dummy substrate(s) **62** and in the gaps **4** and **8**, and then a polymer **65**, such as molding compound, polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or polyphenylene oxide (PPO), can be formed on the encapsulation/gap filling material **64** and in the gaps **4** and **8**. The encapsulation/gap filling material **64** in the gaps **4** and **8** may have a vertical thickness T**4**, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers.

[0115] Next, referring to FIG. **13**, a mechanical grinding process can be performed, e.g., by using an abrasive or grinding pad with water to grind the polymer **65**, the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68** and the dummy substrate(s) **62** until all of the polymer **65** is removed and until a predetermined vertical thickness T**5** of the encapsulation/gap filling material **64** in the gaps **4** and **8** is reached. The predetermined vertical thickness T**5** can be, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers. The abrasive or grinding pad can be provided with rough grit having an average grain size, e.g., between 0.5 and 15 micrometers for performing the mechanical grinding process. Thereafter, a chemical-mechanical-polishing (CMP) process can be performed, e.g., by using a polish pad with a slurry containing chemicals and a fine abrasive like silica with an average grain size, e.g., between 0.02 and 0.05 micrometers to polish the backside of the semiconductor substrate **58** of each chip **68**, the dummy substrate(s) **62** and the encapsulation/gap filling material **64** in the gaps **4** and **8** until the semiconductor substrate **58** of one of the chips **68** is thinned to the thickness T**1** between 1 and 30 micrometers, and preferably between 2 and 5 micrometers, between 2 and 10 micrometers, between 2 and 20 micrometers, or between 3 and 30 micrometers, as shown in FIG. **11**.

[0116] After the chemical-mechanical-polishing (CMP) process, the polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the polished surface(s) **62***s* of the dummy substrate(s) **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The polished surface(s) **62***s* may be substantially coplanar with the polished surface **58***s* of each chip **68** and with the polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**. The polished surfaces **58***s*, **62***s* and **64***s* may have a micro-roughness, e.g., less than 20 nanometers. The chemical-mechanical-polishing (CMP) process, using a very fine abrasive like silica and a relatively weak chemical attack, will create the surfaces **58***s*, **62***s* and **64***s* almost without deformation and scratches, and this means that the chemical-mechanical-polishing (CMP) process is very well suited for the final polishing step, creating the clean surfaces **58***s*, **62***s* and **64***s*. Using the mechanical grinding process and the chemical-mechanical-polishing (CMP) process can be performed to create a very thin semiconductor substrate **10** of each chip **68**. Accordingly, after the chemical-mechanical-polishing (CMP) process, each of the chips **68** can be thinned to a thickness, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, the dummy substrate(s) **62** can be thinned to the thickness T**2**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **64** in the gaps **4** and **8** can be thinned to the thickness T**3**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers.

[0117] Referring to FIG. **14**, after forming the structure illustrated in FIG. **11**, a dielectric layer **60** can be formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, and on the surface **64***s* of the encapsulation/gap filling material **64**. The dielectric layer **60** may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0118] The dielectric layer **60**, for example, can be an inorganic layer formed by, e.g., a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. The inorganic layer can be, e.g., a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC), or a layer including silicon oxide, silicon nitride, silicon carbon nitride and silicon oxynitride. The inorganic layer may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0119] Alternatively, the dielectric layer **60** can be a polymer layer, such as a layer of polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO), formed by, e.g., a process including a spin coating process, a dispensing process, a molding process, or

a screen printing process. The polymer layer may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0120] Alternatively, the dielectric layer **60** can be composed of multiple inorganic layers which include an etch stop layer, such as etch stop layer of silicon oxynitride. The etch stop layer will later be used to stop etching when etching patterns into the dielectric layer **60**. In this case, the dielectric layer **60**, for example, can be composed of a first silicon-oxide layer on the surfaces **58***s*, **62***s* and **64***s*, a silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and a second silicon-oxide layer having a thickness, e.g., between 0.1 and 5 micrometers or between 0.3 and 1.5 micrometers on the silicon-oxynitride layer.

[0121] Next, referring to FIG. **15**, multiple through vias **170***v*, including through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**, by, e.g., the following steps. First, a photoresist layer, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, is formed on the dielectric layer **60** by using a suitable process, such as spin coating process or lamination process. Next, a photo exposure process using a 1X stepper and a development process using a chemical solution can be employed to form multiple openings, exposing the dielectric layer **60**, in the photoresist layer. The photoresist layer may have a thickness, e.g., between 3 and 50 micrometers. Next, the dielectric layer **60** under the openings in the photoresist layer is removed by using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **62** under the openings in the photoresist layer and the chips **68** under the openings in the photoresist layer are etched away until predetermined regions of the layers **26** and **34** in the chips **68** and predetermined regions of the conductive layer **18** in the carrier **11** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **170***v*, including the vias **170***a*-**170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the predetermined regions of the conductive layer **18** of the carrier **11** and exposing the predetermined regions of the layers **26** and **34** of the chips **68**. The through via **170***a* is formed in the dummy substrate **62**, and the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f* are formed in the same chip **68**.

[0122] Alternatively, another technique to form the through vias **170***v* in the chips **68** and in the dummy substrate(s) **62** can be performed by the following steps. First, a photoresist layer, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **60** by using, e.g., a spin coating process or a lamination process. Next, a photo exposure process using a 1X stepper and a development process using a chemical solution can be employed to form multiple openings, exposing the dielectric layer **60**, in the photoresist layer. Next, multiple openings are formed in the dielectric layer **60** and under the openings in the photoresist layer, exposing the dummy substrate(s) **62** and the semiconductor substrates **58** of the chips **68**, by removing the dielectric layer **60** under the openings in the photoresist layer using, e.g., an anisotropic plasma etching process. Next, the photoresist layer is removed by using, e.g., an organic chemical. Next, the dummy substrate(s) **62** under the openings in the dielectric layer **60** and the chips **68** under the openings in the dielectric layer **60** can be etched away until the predetermined regions of the layers **26** and **34** of the chips **68** and the predetermined regions of the conductive layer **18** of the carrier **11** are exposed by the openings in the dielectric layer **60**. Accordingly, the through vias **170***v*, including the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, can be formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**. The through via **170***a* is formed in the dummy substrate **62**, and the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f* are formed in the same chip **68**. Each of the through vias **170***v*, such as the through via **170***a*, **170***b*, **170***c*, **170***d*, **170***e* or **170***f*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0123] One of the through vias **170***v*, such as the through via **170***a*, passes through the dielectric layer **60**, the dummy substrate **62**, the glue layer or silicon-oxide layer **22**, and the dielectric or insulating layer **20** of the carrier **11**, exposing the conductive layer **18** of the carrier **11**. Another one of the through vias **170***v*, such as the through via **170***b*, passes through the dielectric layer **60**, through the semiconductor substrate **58**, dielectric layers **42**, **44**, **46** and **48**, and passivation layer **24** of one of the chips **68**, through the glue layer or silicon-oxide layer **22**, and through the dielectric or insulating layer **20** of the carrier **11**, exposing the conductive layer **18** of the carrier **11**. Another one of the through vias **170***v*, such as the through via **170***c*, passes through the dielectric layer **60** and through the semiconductor substrate **58** and dielectric layer **48** of one of the chips **68**, exposing the interconnect or metal trace **35***d* in the interconnection layer **34** of the one of the chips **68**. Another one of the through vias **170***v*, such as the through via **170***d*, passes through the dielectric layer **60** and through the semiconductor substrate **58** and dielectric layers **44**, **46** and **48** of one of the chips **68**, exposing the interconnect or metal trace **35***c* in the patterned metal layer **26** of the one of the chips **68**. Another one of the through vias **170***v*, such as the through via **170***f*, passes through the dielectric layer **60** and through the semiconductor substrate **58** and dielectric layer **48** of one of the chips **68**, exposing the interconnect or metal trace **35***b* in the interconnection layer **34** of the one of the chips **68**. Another one of the through vias **170***v*, such as the through via **170***e*, passes through the dielectric layer **60**, through the semiconductor substrate **58**, dielectric layers **42**, **44**, **46** and **48**, and passivation layer **24** of one of the chips **68**, through the glue layer or silicon-oxide layer **22**, and through the dielectric or insulating layer **20** of the carrier **11**, exposing the interconnect or metal trace **35***a* in the interconnection layer **34** of the one of the chips **68** and exposing the conductive layer **18** of the carrier **11**. A supporter **801** provided by the layers **20**, **22**, **24**, **42** and **44** is between the conductive layer **18** of the carrier **11** and the interconnect or metal trace **35***a* in the interconnection layer **34** exposed by the through via **170***e* for the purpose of supporting the exposed interconnect or metal trace **35***a*. The supporter **801** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. FIGS. **16**-**18** are three examples of schematic top perspective views

showing the through via **170***e* and the interconnect or metal trace **35***a* illustrated in FIG. **15**.

[0124] As shown in FIGS. **15** and **16**, the through via **170***e* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes two regions of the conductive layer **18** in the carrier **11** under the one of the chips **68**. The interconnect or metal trace **35***a* has a line-shaped region, exposed by the through via **170***e*, extending in a horizontal direction from a side of the through via **170***e* to the opposite side of the through via **170***e* through a center of the through via **170***e*. The previously described supporter **801**, between the conductive layer **18** of the carrier **11** and the exposed line-shaped region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **35***a*. Preferably, the through via **170***e* can be, but is not limited to, a circular shape from a top perspective view.

[0125] As shown in FIGS. **15** and **17**, the through via **170***e* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes a region of the conductive layer **18** in the carrier **11** under the one of the chips **68**. The interconnect or metal trace **35***a* has a peninsula region, exposed by the through via **170***e*, extending in a horizontal direction from one side of the through via **170***e* at least to a center of the through via **170***e*, but does not reach to the opposite side of the through via **170***e*; the interconnect or metal trace **35***a* has an end exposed by the through via **170***e*. The previously described supporter **801**, between the conductive layer **18** of the carrier **11** and the exposed peninsula region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **35***a*. Preferably, the through via **170***e* can be, but is not limited to, a circular shape from a top perspective view.

[0126] As shown in FIGS. **15** and **18**, the through via **170***e* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes a region of the conductive layer **18** in the carrier **11** under the one of the chips **68**. The interconnect or metal trace **35***a* has a peninsula region, exposed by the through via **170***e*, extending in a horizontal direction from one side of the through via **170***e* at least to a center of the through via **170***e*, but does not reach to the opposite side of the through via **170***e*; the interconnect or metal trace **35***a* has a circular end exposed by the through via **170***e*. The previously described supporter **801**, between the conductive layer **18** of the carrier **11** and the exposed peninsula region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **35***a*. Preferably, the through via **170***e* can be, but is not limited to, a circular shape from a top perspective view.

[0127] FIG. **16**A is an example of a schematic top perspective view showing the through via **170***e* and the interconnect or metal trace **35***a* illustrated in FIG. **15**. In this case, the through via **170***e* can be, but is not limited to, oval-shaped and has a width W**1**, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers. The oval-shaped through via **170***e* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes two regions of the conductive layer **18** in the carrier **11** under the one of the chips **68**. The interconnect or metal trace **35***a* has a line-shaped region, exposed by the oval-shaped through via **170***e*, extending in a horizontal direction from a side of the oval-shaped through via **170***e* to the opposite side of the oval-shaped through via **170***e* through a center of the oval-shaped through via **170***e*. The previously described supporter **801**, between the conductive layer **18** of the carrier **11** and the exposed line-shaped region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **35***a*. The interconnect or metal trace **35***a* exposed by the oval-shaped through via **170***e* has a width W**2**, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 20 micrometers, between 0.3 and 10 micrometers, between 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. A horizontal distance S**1** between an endpoint of the long axis of the oval-shaped through via **170***e* and an edge, which is closer to the endpoint than the other opposite edge, of the interconnect or metal trace **35***a* exposed by the oval-shaped through via **170***e* can be, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers.

[0128] Next, referring to FIG. **19**, a dielectric layer **50** is formed on a top surface of the dielectric layer **60**, on the conductive layer **18**, exposed by the through vias **170***v* (such as the through vias **170***a*, **170***b* and **170***e*), of the carrier **11**, on the layers **26** and **34**, exposed by the through vias **170***v* (such as the through vias **170***c*, **170***d*, **170***e* and **170***f*), of the chips **68**, and on sidewalls of the through vias **170***v*.

[0129] The dielectric layer **50** can be composed of an insulating material. For example, the dielectric layer **50** can be an inorganic layer having a thickness, e.g., between 20 nanometers and 1 micrometer, and the inorganic layer can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC). Alternatively, the dielectric layer **50** can be a polymer layer having a thickness, e.g., between 1 and 10 micrometers, and preferably between 1 and 5 micrometers, and the polymer layer can be a layer of polyimide, benzocyclobutene (BCB), epoxy, polyphenylene oxide (PPO), or polybenzoxazole (PBO).

[0130] Next, referring to FIG. **20**, a photoresist layer **168**, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **50** by using, e.g., a spin coating process or a lamination process. Next, a photo exposure process using a 1X stepper and a development process using a wet chemical can be employed to form multiple openings **168***a*, exposing the dielectric layer **50**, in the photoresist layer **168**. The photoresist layer **168** may have a thickness, e.g., between 0.5 and 30 micrometers.

[0131] Next, referring to FIG. **21**, the dielectric layer **50** formed on the layers **18**, **26** and **34** and on the top surface of the dielectric layer **60** under the openings **168***a* can be removed by, e.g., etching the dielectric layer **50** under the openings **168***a* using an anisotropic plasma etching process. The dielectric layer **50** at bottoms of the through vias **170***v*, on the top surface of the dielectric layer **60** under the openings **168***a*, and on a top surface of the interconnect or metal trace **35***a* over the supporter **801** can be etched away. Accordingly, the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, the top surface of the dielectric layer **60** under the openings **168***a*, and the interconnect or metal trace **35***a* over the supporter **801** are exposed by the openings **168***a*, and the dielectric layer **50** remains on the sidewalls of the through

vias **170***v*, so called as sidewall dielectric layers in the through vias **170***v*. The sidewall dielectric layers **50** are formed on the sidewalls of the through vias **170***v* in the chips **68** or in the dummy substrate(s) **62** and are enclosed by the semiconductor substrates **58** of the chips **68** or by the dummy substrate(s) **62**.

[0132] Next, referring to FIG. **22**, multiple trenches **60***t*, damascene openings, are formed in the dielectric layer **60** by etching the dielectric layer **60** and the sidewall dielectric layers **50** under the openings **168***a* to a depth D**3**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers, using, e.g., an anisotropic plasma etching process. Preferably, the dielectric layer **60** and the sidewall dielectric layers **50** have a same material, such as silicon nitride, silicon oxide, or silicon oxynitride. After the etching process, the dielectric layer **60** under the trenches **60***t* has a remaining thickness T**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0133] Alternatively, an etching-stop technique may be applied to the process of forming the trenches **60***t* in the dielectric layer **60**. In this case, the dielectric layer **60** is composed of the previously described inorganic layers, e.g., including the first silicon-oxide layer on the surfaces **58***s*, **62***s* and **64***s*, the silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and the second silicon-oxide layer on the silicon-oxynitride layer. The trenches **60***t* can be formed in the dielectric layer **60** by etching the second silicon-oxide layer of the dielectric layer **60** under the openings **168***a* and the sidewall dielectric layers **50** under the openings **168***a* until the silicon-oxynitride layer of the dielectric layer **60** is exposed by the openings **168***a*. Accordingly, the trenches **60***t* are formed in the second silicon-oxide layer of the dielectric layer **60**, and the remaining dielectric layer **60**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, under the trenches **60***t* has a thickness T**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0134] Next, referring to FIG. **23**, the photoresist layer **168** is removed by using, e.g., an organic chemical. The trenches **60***t* formed in the dielectric layer **60** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The sidewall dielectric layers **50** formed on the sidewalls of the through vias **170***v* (such as the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f*) in the chips **68** can prevent transition metals, such as copper, sodium or moisture from penetrating into IC devices of the chips **68**. FIG. **24** is a schematic top perspective view showing the through vias **170***v*, the trenches **60***t* and the sidewall dielectric layers **50** shown in FIG. **23** according an embodiment of the present invention, and FIG. **23** is a cross-sectional view cut along the line D-D shown in FIG. **24**.

[0135] Next, referring to FIG. **25**, an adhesion/barrier layer **52** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, can be formed on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on sidewalls and bottoms of the trenches **60***t*, on the dielectric layer **50**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The adhesion/barrier layer **52** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **54** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, can be formed on the adhesion/barrier layer **52** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a conduction layer **56** having a thickness, e.g., between 0.5 and 20 micrometers or between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, can be formed on the seed layer **54** by using, e.g., an electroplating process.

[0136] The adhesion/barrier layer **52** may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness, e.g., smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **54** may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness, e.g., smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers. The conduction layer **56** may include or can be an electroplated metal layer of copper, gold, or silver having a thickness, e.g., between 0.5 and 20 micrometers or between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0137] Next, referring to FIG. **26**, by using a grinding or polishing process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, the layers **52**, **54** and **56** outside the trenches **60***t* can be removed, and the dielectric layer **50** on the top surface of the dielectric layer **60** can be removed. Accordingly, the dielectric layer **60** has an exposed top surface **60***s* that can be substantially coplanar with the ground or polished surface **56***s* of the conduction layer **56** in the trenches **60***t*, and the surfaces **56***s* and **60***s* can be substantially flat. The dielectric layer **60** has a thickness T**7**, between the exposed top surface **60***s* and the surface **58***s* or **62***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers or between 2 and 5 micrometers. The adhesion/barrier layer **52** and the seed layer **54** are at sidewalls and a bottom of the conduction layer **56** in the trenches **60***t*, and the sidewalls and the bottom of the conduction layer **56** in the trenches **60***t* are covered by the adhesion/barrier layer **52** and the seed layer **54**.

[0138] In a first alternative, after the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the adhesion/barrier layer **52** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers

IPR2026-00067
TSMC EX1019 Page 256

and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0139] In a second alternative, after the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the adhesion/barrier layer **52** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0140] In a third alternative, after the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the adhesion/barrier layer **52** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0141] After the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the layers **52**, **54** and **56** in the trenches **60***t* compose multiple metal interconnects (or damascene metal traces) **1**, including metal interconnects (or damascene metal traces) **1***a* and **1***b*, in the trenches **60***t*. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f* as shown in FIG. **23**, respectively. Each of the metal plugs **5***p* in the chips **68** and in the dummy substrate(s) **62** is enclosed by one of the sidewall dielectric layers **50** in the through vias **170***v*. The metal plug **5***a* is formed in the dummy substrate **62**, and the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* are formed in the same chip **68**. The supporter **801** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **801** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***e*. These metal plugs **5***p* formed in the chips **68** and in the dummy substrate(s) **62** can connect the metal interconnects **1** and the semiconductor devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**. The metal interconnects **1**, such as **1***a* and **1***b*, in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0142] For example, one of the metal plugs **5***p*, such as the metal plug **5***a*, can be formed in the dummy substrate **62** and formed on a first contact point of the conductive layer **18** at a bottom of one of the through vias **170***v*, such as the through via **170***a*. Another one of the metal plugs **5***p*, such as the metal plug **5***b*, can be formed in one of the chips **68** and formed on a second contact point of the conductive layer **18** at a bottom of another one of the through vias **170***v*, such as the through via **170***b*. Another one of the metal plugs **5***p*, such as the metal plug **5***c*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***c*), of the interconnect or metal trace **35***d* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***d*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***d*), of the interconnect or metal trace **35***c* in the patterned metal layer **26** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***f*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***f*), of the interconnect or metal trace **35***b* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***e*, can be formed in one of the chips **68**, formed on a contact point of the interconnect or metal trace **35***a* over a supporter (such as the supporter **801**) that is between two lower left and right portions of the another one of the metal plugs **5***p* (such as the metal plug **5***e*), and formed on a third contact point of the conductive layer **18** at a bottom of one of the through vias **170***v* (such as the through via **170***e*). The previously described first, second and third contact points of the conductive layer **18** can be separated from one another by the dielectric or insulating layer **20** of the carrier **11**.

[0143] One of the metal interconnects **1**, such as **1***a* or **1***b*, can be formed over the dummy substrate(s) **62**, over multiple of the chips **68**, and across multiple edges of the multiple of the chips **68**. The metal interconnect **1***a* can be connected to the previously described first contact point of the conductive layer **18** at the bottom of the through via **170***a* through the metal plug **5***a* in the dummy substrate **62**, can be connected to the previously described second contact point of the conductive layer **18** at the bottom of the through via **170***b* through the metal plug **5***b* in one of the chips **68**, can be connected to the contact point, at the bottom of the through via **170***c*, of the interconnect or metal trace **35***d* in the one of the chips **68** through the metal plug **5***c* in the one of the chips **68**, and can be connected to the contact point, at the bottom of the through

IPR2026-00067
TSMC EX1019 Page 257

via **170***d*, of the interconnect or metal trace **35***c* in the one of the chips **68** through the metal plug **5***d* in the one of the chips **68**. The metal interconnect **1***b* can be connected to the contact point, at the bottom of the through via **170***f*, of the interconnect or metal trace **35***b* in the one of the chips **68** through the metal plug **5***f* in the one of the chips **68**, can be connected to the previously described third contact point of the conductive layer **18** at the bottom of the through via **170***e* through the metal plug **5***e* in the one of the chips **68**, and can be connected to the interconnect or metal trace **35***a* on the supporter **801** through the metal plug **5***e* in the one of the chips **68**. The metal interconnect **1***a* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**. The metal interconnect **1***b* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**.

[0144] Accordingly, one of the semiconductor devices **36** in one of the chips **68** can be connected to another one of the semiconductor devices **36** in the one of the chips **68** or in another one of the chips **68** through one of the metal interconnects **1**, such as **1***a* or **1***b*, and can be connected to a contact point, at a bottom of one of the through vias **170***v* (such as the through via **170***a*, **170***b* or **170***e*), of the conductive layer **18** in the carrier **11** through the one of the metal interconnects **1**. Each of the metal interconnects **1** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0145] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0146] Referring to FIG. **27**, after forming the structure illustrated in FIG. **26**, an insulating or dielectric layer **66** can be formed on the ground or polished surface **52***s* of the adhesion/barrier layer **52**, on the ground or polished surface **54***s* of the seed layer **54**, on the ground or polished surface **56***s* of the conduction layer **56**, and on the exposed top surface **60***s* of the dielectric layer **60**. The insulating or dielectric layer **66** may have a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers.

[0147] The insulating or dielectric layer **66**, for example, may include or can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC) with a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers, formed by a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process.

[0148] Alternatively, the insulating or dielectric layer **66** may include or can be a polymer layer with a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers, formed by, e.g., a process including a spin coating process and a curing process. The polymer layer can be a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO).

[0149] Next, referring to FIG. **28**, a dummy substrate **165** can be attached onto the insulating or dielectric layer **66**, e.g., by the following steps. First, a glue layer **116** having a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers, can be formed on a top surface of the insulating or dielectric layer **66** or on a bottom surface of the dummy substrate **165** by using, e.g., a spin coating process, a lamination process, a spraying process, a dispensing process, or a screen printing process. Next, the glue layer **116** can be optionally pre-cured or baked. Next, the dummy substrate **165** can be placed over the insulating or dielectric layer **66** with the glue layer **116** between the insulating or dielectric layer **66** and the dummy substrate **165**. Next, the glue layer **116** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **116**. Accordingly, the dummy substrate **165** can be joined with the insulating or dielectric layer **66** using the glue layer **116**. The glue layer **116** can be a polymer layer, such as a layer of epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), polyphenylene oxide (PPO), or silosane, with a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers.

[0150] Alternatively, the glue layer **116** can be replaced with an inorganic insulating layer, such as silicon oxide, that can be formed on the insulating or dielectric layer **66**. In this case, the dummy substrate **165** can be joined with the insulating or dielectric layer **66**, e.g., by bonding an inorganic insulating layer, such as silicon oxide, of the dummy substrate **165** onto the inorganic insulating layer **116**, such as silicon oxide. The silicon-oxide layer of the dummy substrate **165** contacts the silicon-oxide layer **116**.

[0151] The dummy substrate **165** can be a round wafer, a dummy silicon wafer, a rectangular panel, or a substrate of polysilicon, glass, silicon or ceramic. The dummy substrate **165**, before being ground or polished as mentioned in the following processes, may have a thickness, e.g., greater than 100 micrometers, such as between 100 and 1,500 micrometers, and preferably between 200 and 500 micrometers or between 100 and 300 micrometers.

[0152] In one embodiment, there are no circuits preformed in the dummy substrate **165** or on a top or bottom surface of the dummy substrate **165** before the dummy substrate **165** is joined with the insulating or dielectric layer **66**. The dummy substrate **165** may have a top surface with the profile that is substantially same as that of the top surface of the carrier **11**.

[0153] Next, referring to FIG. **29**, a photoresist layer **166** can be formed on the dummy substrate **165** by using, e.g., a spin coating process, a screen printing process, or a lamination process, and then a photo exposure process and a development process can be employed to form multiple openings **166***a*, exposing multiple regions of the dummy substrate **165**, in the photoresist layer **166**. The photoresist layer **166**, after the photo exposure process and the development process, may have a thickness, e.g., between 10 and 200 micrometers. FIG. **30** shows a schematic top view of the photoresist layer **166** with the openings **166***a* as shown in FIG. **29**, and FIG. **30** can be a cross-sectional view cut along the line E-E shown in FIG. **29**.

[0154] Next, referring to FIG. **31**, multiple openings **165***a* are formed in the dummy substrate **165** and under the openings **166***a* in the photoresist layer **166**, exposing the glue layer **116**, by using, e.g., a chemical etching process or a plasma

etching process, and then the patterned photoresist layer **166** is removed by using, e.g., an organic chemical. Alternatively, when the glue layer **116** is replaced with the silicon-oxide layer and the dummy substrate **165** has the silicon-oxide layer bonded with the silicon-oxide layer **116**, the openings **165***a* are formed in the dummy substrate **165** and under the openings **166***a* in the photoresist layer **166**, exposing the silicon-oxide layer of the dummy substrate **165**, by using, e.g., a chemical etching process or a plasma etching process, and then the patterned photoresist **166** is removed by using, e.g., an organic chemical. FIG. **32** shows a schematic top view of the dummy substrate **165** with the openings **165***a* as shown in FIG. **31**, and FIG. **31** can be a cross-sectional view cut along the line F-F shown in FIG. **32**.

[0155] Alternatively, a hard mask (not shown), such as silicon oxide or silicon nitride, may be formed on the dummy substrate **165** shown in FIG. **31**, e.g., by the following steps. First, the hard mask of silicon oxide or silicon nitride can be formed on the dummy substrate **165** shown in FIG. **28**. Next, the photoresist layer **166** can be formed on the hard mask by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **166***a*, exposing multiple regions of the hard mask, in the photoresist layer **166**. Next, multiple openings are formed in the hard mask and under the openings **166***a* in the photoresist layer **166**, exposing multiple regions of the dummy substrate **165**, by using, e.g., a wet etching process or a plasma etching process. Next, the patterned photoresist layer **166** is removed by using, e.g., an organic chemical. Next, multiple openings **165***a* are formed in the dummy substrate **165** and under the openings in the hard mask, exposing the glue layer **116**, by using, e.g., a chemical etching process or a plasma etching process. Alternatively, when the glue layer **116** is replaced with the silicon-oxide layer and the dummy substrate **165** has the silicon-oxide layer bonded with the silicon-oxide layer **116**, the openings **165***a* are formed in the dummy substrate **165** and under the openings in the hard mask, exposing the silicon-oxide layer of the dummy substrate **165**, by using, e.g., a chemical etching process or a plasma etching process. The hard mask will be removed by the following grinding or polishing process.

[0156] Next, referring to FIG. **33**, multiple chips **72** can be mounted over the insulating or dielectric layer **66** and in the openings **165***a* in the dummy substrate **165**, and the chips **72** have active sides at bottoms of the chips **72** and backsides at tops of the chips **72**. In one case, one of the chips **72** may have different circuit designs from those of another one of the chips **72**. Also, in another case, one of the chips **72** may have same circuit designs as those of another one of the chips **72**. Alternatively, one of the chips **72** may have a different area (top surface) or size from that of another one of the chips **72**. Also, in another case, one of the chips **72** may have a same area (top surface) or size as that of another one of the chips **72**. FIG. **34** is an example of a schematical top view showing the chips **72** mounted in the openings **165***a* in the dummy substrate **165**, and FIG. **33** is a cross-sectional view cut along the line G-G shown in the schematical top view of FIG. **34**.

[0157] Mounting the chips **72** over the insulating or dielectric layer **66** and in the openings **165***a* can be performed, e.g., by first forming a glue material (not shown) on the active sides of the chips **72** or on the glue layer **116**, next placing the chips **72** in the openings **165***a* and over the glue layer **116** with the glue material contacting the glue layer **116**, and then curing the glue material in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue material. Accordingly, the chips **72** can be joined with the glue layer **116** using the glue material.

[0158] Each of the chips **72** can include a semiconductor substrate **96**, multiple semiconductor devices **102** in and/or on the semiconductor substrate **96**, a passivation layer **74** under the semiconductor substrate **96**, multiple dielectric layers **82**, **108**, **104** and **100** between the semiconductor substrate **96** and the passivation layer **74**, a patterned metal layer **114** between the semiconductor substrate **96** and the passivation layer **74**, an interconnection layer **106** between the semiconductor substrate **96** and the passivation layer **74**, multiple via plugs **114***a* in the dielectric layer **108**, and multiple via plugs **106***a* in the dielectric layer **100**. The semiconductor substrate **96** is at the backside of each chip **72**, and the semiconductor devices **102**, the passivation layer **74**, the patterned metal layer **114**, the interconnection layer **106**, the dielectric layers **82**, **108**, **104** and **100**, and the via plugs **106***a* and **114***a* are at the active side of each chip **72**.

[0159] The semiconductor substrate **96** can be a suitable substrate, such as silicon substrate, silicon-germanium (SiGe) substrate, or gallium-arsenide (GaAs) substrate. The semiconductor substrate **96** before being thinned as mentioned in the following processes may have a thickness, e.g., greater than 100 micrometers, such as between 100 and 500 micrometers, and preferably between 150 and 250 micrometers or between 100 and 300 micrometers.

[0160] Each of the semiconductor devices **102** can be a bipolar transistor, a P-channel metal-oxide-semiconductor (PMOS) transistor, an N-channel metal-oxide-semiconductor (NMOS) transistor, or a double-diffused metal-oxide-semiconductor (DMOS) transistor. Each of the semiconductor devices **102** can be provided for a NOR gate, a NAND gate, an AND gate, an OR gate, a static-random-access-memory (SRAM) cell, a dynamic-random-access-memory (DRAM) cell, a flash memory cell, a non-volatile memory cell, an erasable programmable read-only memory (EPROM) cell, a read-only memory (ROM) cell, a magnetic-random-access-memory (MRAM) cell, a sense amplifier, an inverter, an operational amplifier, an adder, a multiplexer, a diplexer, a multiplier, an analog-to-digital (A/D) converter, a digital-to-analog (D/A) converter, an analog circuit, a complementary-metal-oxide-semiconductor (CMOS) sensor, or a charge coupled device (CCD).

[0161] The passivation layer **74** may include or can be an inorganic dielectric layer having a bottom surface attached to the glue layer **116**, and the inorganic dielectric layer can be a layer of silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN) or silicon oxynitride (such as SiON) with a thickness, e.g., between 0.3 and 1.5 micrometers. Alternatively, each of the chips **72** may further contain an organic polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), epoxy, or silosane, with a thickness, e.g., greater than 3 micrometers, such as between 3 and 20 micrometers, and preferably between 5 and 12 micrometers, under and on the bottom surface of the inorganic dielectric layer of the passivation layer **74**. In this case, the organic polymer layer has a bottom surface attached to the glue layer **116**. The organic polymer layer has a top surface contacting the bottom surface of the inorganic dielectric layer of the passivation layer **74**.

[0162] Alternatively, multiple openings (not shown) each having a width, e.g., between 0.5 and 100 micrometers, and preferably between 20 and 60 micrometers, may be formed in the passivation layer **74** and expose multiple contact points of the patterned metal layer **114**.

[0163] The dielectric layer **82** can be between the passivation layer **74** and the dielectric layer **108**. The dielectric layer **108** can be between the dielectric layers **82** and **104** and between the layers **106** and **114**. The dielectric layer **104** can be between the dielectric layers **100** and **108**. Each of the dielectric layers **82**, **108** and **104** may include silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), silicon oxycarbide (such as SiOC), or a low-k material having a dielectric constant between 1.8 and 3 (such as fluorinated silicate glass (FSG) or Black-diamond). Each of the dielectric layers **82**, **108** and **104** may have a thickness, e.g., between 10 nanometers and 2 micrometers, and preferably between 50 nanometers and 1 micrometer.

[0164] The dielectric layer **100** between the dielectric layer **104** and the semiconductor substrate **96** and between the interconnection layer **106** and the semiconductor substrate **96** may include or can be a layer of phosphorous silicate glass (PSG), borophospho-silicate glass (BPSG), silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or a low-k material having a dielectric constant between 1.8 and 3 (such as fluorinated silicate glass (FSG) or Black-diamond). The dielectric layer **100** may have a thickness, e.g., between 10 nanometers and 1 micrometer.

[0165] The patterned metal layer **114**, for example, may include an aluminum-copper-alloy layer having a thickness, e.g., between 0.3 and 3 micrometers and a titanium-containing layer having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers. The titanium-containing layer can be between the dielectric layer **108** and the aluminum-copper-alloy layer and on the aluminum-copper-alloy layer, and the aluminum-copper-alloy layer is between the passivation layer **74** and the titanium-containing layer. The titanium-containing layer can be a single layer of titanium, titanium nitride, or a titanium-tungsten alloy having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers.

[0166] Alternatively, the patterned metal layer **114** may include a nickel layer having a thickness, e.g., between 0.5 and 3 micrometers, and a gold layer having a thickness, e.g., between 0.01 and 1 micrometers under and on the nickel layer, in the view from the side of the dielectric layer **108** to the side of the passivation layer **74**. The nickel layer is between the dielectric layer **108** and the gold layer, and the gold layer is between the nickel layer and the passivation layer **74**.

[0167] Alternatively, the patterned metal layer **114** can be formed by a damascene or double-damascene process including an electroplating process and a chemical mechanical polishing (CMP) process and can be composed of an electroplated copper layer having a bottom contacting the passivation layer **74**, an adhesion/barrier metal layer at a top and sidewalls of the electroplated copper layer, and a seed layer between the electroplated copper layer and the adhesion/barrier metal layer and on the top and sidewalls of the electroplated copper layer. The adhesion/barrier metal layer has a first portion between the top of the electroplated copper layer and the dielectric layer **108** and a second portion at the sidewalls of the electroplated copper layer. The electroplated copper layer may have a thickness, e.g., smaller than 1.5 micrometers, such as between 0.15 and 1.2 micrometers, or smaller than 3 micrometers, such as between 0.3 and 3 micrometers. The electroplated copper layer may have a width, e.g., smaller than 1 micrometer, such as between 0.05 and 1 micrometers. The seed layer may include or can be a layer of copper or a titanium-copper alloy formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, or tantalum nitride formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may have a thickness, e.g., smaller than 0.1 micrometers, such as between 0.005 and 0.1 micrometers. The sidewalls of the electroplated copper layer are covered by the adhesion/barrier metal layer and the seed layer.

[0168] The interconnection layer **106**, for example, may include carbon nanotube. Alternatively, the interconnection layer **106** can be composed of a patterned metal layer in the dielectric layer **104**. In a first alternative, the patterned metal layer **106** may include an aluminum-copper-alloy layer having a thickness, e.g., between 10 nanometers and 2 micrometers and a titanium-containing layer, such as a single layer of titanium nitride, titanium-tungsten alloy or titanium, having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers. The titanium-containing layer can be on the aluminum-copper-alloy layer and between the dielectric layer **100** and the aluminum-copper-alloy layer, and the aluminum-copper-alloy layer can be in the dielectric layer **104**. In a second alternative, the patterned metal layer **106** can be formed by a damascene or double-damascene process including an electroplating process and a chemical mechanical polishing (CMP) process and can be composed of an electroplated copper layer having a bottom contacting the dielectric layer **108**, an adhesion/barrier metal layer at a top and sidewalls of the electroplated copper layer, and a seed layer between the electroplated copper layer and the adhesion/barrier metal layer and on the top and sidewalls of the electroplated copper layer. The adhesion/barrier metal layer has a first portion between the top of the electroplated copper layer and the dielectric layer **100** and a second portion at the sidewalls of the electroplated copper layer. The electroplated copper layer may have a thickness, e.g., smaller than 2 micrometers, such as between 0.15 and 1 micrometers or between 10 nanometers and 2 micrometers. The electroplated copper layer may have a width, e.g., smaller than 1 micrometer, such as between 0.05 and 1 micrometers. The seed layer may include or can be a layer of copper or a titanium-copper alloy formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may include or can be a layer of titanium, titanium nitride, a titanium-tungsten alloy, chromium, tantalum or tantalum nitride formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may have a thickness, e.g., smaller than 0.1 micrometers, such as between 0.005 and 0.1 micrometers. The sidewalls of the electroplated copper layer are covered by the adhesion/barrier metal layer and the seed layer.

[0169] The patterned metal layer **114** in the dielectric layer **82** can be connected to the interconnection layer **106** in the dielectric layer **104** through the via plugs **114***a* in the dielectric layer **108**. The interconnection layer **106** in the dielectric layer **104** can be connected to the semiconductor devices **102** through the via plugs **106***a* in the dielectric layer **100**. The via

plugs **114***a* may include electroplated copper, tungsten, or carbon nanotube in the dielectric layer **108**. The via plugs **106***a* may include electroplated copper, tungsten, or carbon nanotube in the dielectric layer **100**.

[0170] Each of the chips **72** may include multiple interconnects or metal traces **55***a*, **55***b* and **55***c* provided by the interconnection layer **106**, the patterned metal layer **114** and the via plugs **106***a* and **114***a*. Each of the interconnects or metal traces **55***a*, **55***b* and **55***c* can be connected to one or more of the semiconductor devices **102** and can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0171] Alternatively, each of the chips **72** may further include a patterned metal layer (not shown), having a thickness greater than that of the patterned metal layer **114** and greater than that of the interconnection layer **106**, between the glue layer **116** and the passivation layer **74**. The patterned metal layer under the passivation layer **74** may include an electroplated metal layer under the passivation layer **74**, an adhesion/barrier metal layer between the electroplated metal layer and the passivation layer **74**, and a seed layer between the electroplated metal layer and the adhesion/barrier metal layer. In the view from the side of the passivation layer **74** to the side of the glue layer **116**, the adhesion/barrier metal layer can be on the seed layer, and the seed layer can be on the electroplated metal layer. Sidewalls of the electroplated metal layer are not covered by the adhesion/barrier metal layer and the seed layer. The adhesion/barrier metal layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, or nickel with a thickness, e.g., smaller than 0.6 micrometers, such as between 1 nanometer and 0.5 micrometers or between 0.005 and 0.1 micrometers. The seed layer may include or can be a layer of copper, a titanium-copper alloy, silver, gold, or nickel with a thickness, e.g., smaller than 0.8 micrometers, such as between 5 nanometers and 0.1 micrometers or between 10 nanometers and 0.8 micrometers. Each of the adhesion/barrier metal layer and the seed layer can be formed by a suitable process, such as sputtering process. The electroplated metal layer may include or can be a layer of electroplated copper, electroplated silver, or electroplated gold with a thickness, e.g., greater than 2 micrometers, such as between 2 and 30 micrometers, and preferably between 3 and 10 micrometers or between 5 and 25 micrometers.

[0172] Alternatively, when the silicon-oxide layer of the dummy substrate **165** remains on the silicon-oxide layer **116**, after forming the openings **165***a*, and is exposed by the openings **165***a* in the dummy substrate **165**, mounting the chips **72** over the insulating or dielectric layer **66** and in the openings **165***a* can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **74**, at the active side of each chip **72**, with the remaining silicon-oxide layer of the dummy substrate **165** under the passivation layer **74**. The silicon-oxide layer of the passivation layer **74** contacts the silicon-oxide layer of the dummy substrate **165**. Accordingly, the chips **72** can be joined with the insulating or dielectric layer **66** using these silicon-oxide layers.

[0173] Alternatively, another technique to form the structure illustrated in FIGS. **33** and **34** is performed by first providing a patterned dummy substrate **165**, such as patterned dummy wafer, patterned panel, patterned silicon frame, or patterned substrate of polysilicon, glass, silicon, ceramic, or polymer, with multiple openings **165***a* passing through the patterned dummy substrate **165**, next joining the patterned dummy substrate **165** with the insulating or dielectric layer **66** using the layer **116**, which can be referred to as the steps illustrated in FIG. **28**, and then mounting the chips **72** over the insulating or dielectric layer **66** and in the openings **165***a* in the patterned dummy substrate **165**, which can be referred to as the steps illustrated in FIG. **33**.

[0174] As shown in FIGS. **33** and **34**, there are multiple gaps **4***a* each between the dummy substrate **165** and one of the chips **72**, and there are multiple gaps **8***a* (one of them is shown) each between neighboring two chips **72**. Each of the gaps **4***a* may have a transverse distance or spacing D**4**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***a* may have a transverse distance or spacing D**5**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0175] FIG. **35** shows another technique to form the structure with the same cross-sectional view as shown in FIG. **33**. FIG. **33** is a cross-sectional view cut along the line G-G shown in a schematical top view of FIG. **35**. The structure shown in FIGS. **33** and **35** can be formed, e.g., by the following steps. First, the previously described glue layer **116** can be formed on the insulating or dielectric layer **66** shown in FIG. **27** by using, e.g., a spin coating process, a laminating process, a spraying process, a dispensing process, or a screen printing process. Next, the glue layer **116** can be optionally pre-cured or baked. Next, the previously described chips **72** and multiple separate dummy substrates **165** can be placed on the glue layer **116**. When a gap between neighboring two chips **72** is too great, such as greater than 500 or 1,000 micrometers, one or more of the separate dummy substrates **165** can be placed in the gap. Alternatively, when a gap between neighboring two chips **72** is small enough, such as smaller than 500 or 1,000 micrometers, there can be no separate dummy substrates **165** placed in the gap. Next, the glue layer **116** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **116**. Accordingly, the separate dummy substrates **165** and the chips **72** can be joined with the insulating or dielectric layer **66** using the glue layer **116**. The separate dummy substrates **165**, for example, can be separate silicon bars, separate dummy chips, separate dummy silicon dies, or separate substrates of polysilicon, glass, silicon, or ceramic.

[0176] Alternatively, referring to FIGS. **33** and **35**, the glue layer **116** can be replaced with a silicon-oxide layer that is formed on the insulating or dielectric layer **66**. In this case, joining the chips **72** with the layer **66** and joining the separate dummy substrates **165** with the layer **66** can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **74**, at the active side of each chip **72**, with the silicon-oxide layer **116** and by bonding another silicon-oxide layer of each of the separate dummy substrates **165** with the silicon-oxide layer **116**. The silicon-oxide layer of the passivation layer **74** of each chip **72** contacts the silicon-oxide layer **116**, and the silicon-oxide layer of each of the separate dummy substrates **165** contacts the silicon-oxide layer **116**. Accordingly, the chips **72** and the separate dummy substrates **165** can be joined with the insulating or dielectric layer **66** using these silicon-oxide layers.

[0177] As shown in FIGS. **33** and **35**, there are multiple gaps **4***a* each between one of the chips **72** and one of the

separate dummy substrates **165**, and there are multiple gaps **8***a* (one of them is shown) each between neighboring two chips **72**. Each of the gaps **4***a* may have a transverse distance or spacing D**4**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***a* may have a transverse distance or spacing D**5**, e.g., smaller than 500 micrometers, such as between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. In one embodiment, there are no circuits preformed in each separate dummy substrate **165** or on a top or bottom surface of each separate dummy substrate **165** before the separate dummy substrates **165** are joined with the insulating or dielectric layer **66**.

[0178] Referring to FIG. **36**, after the steps illustrated in FIGS. **33** and **34** or in FIGS. **33** and **35**, an encapsulation/gap filling material **98**, such as polysilicon, silicon oxide, or a polymer, can be formed on a backside of the semiconductor substrate **96** of each chip **72**, on the dummy substrate(s) **165**, and in the gaps **4***a* and **8***a*. If the encapsulation/gap filling material **98** is polysilicon, the polysilicon can be formed by a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. If the encapsulation/gap filling material **98** is silicon oxide, the silicon oxide can be formed by a chemical vapor deposition (CVD) process, a plasma-enhanced chemical vapor deposition (PECVD) process, or an atmospheric pressure chemical vapor deposition (APCVD) process. If the encapsulation/gap filling material **98** is a polymer, such as polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or polyphenylene oxide (PPO), the polymer can be formed by a process including a spin coating process, a dispensing process, a molding process, or a screen printing process.

[0179] Next, referring to FIG. **37**, the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** are ground or polished by, e.g., a chemical-mechanical-polishing (CMP) process, a mechanical polishing process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the semiconductor substrate **96** of one of the chips **72** is thinned to a thickness T**8**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Preferably, each of the chips **72**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. After the grinding or polishing process, the dummy substrate(s) **165** can be thinned to a thickness T**9**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **98** remaining in the gaps **4***a* and **8***a* may have a vertical thickness T**10**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **96***s* of the semiconductor substrate **96**, at the backside of each chip **72**, and the ground or polished surface(s) **165***s* of the dummy substrate(s) **165** can be substantially flat and not covered by the encapsulation/gap filling material **98**. The ground or polished surface(s) **165***s* may be substantially coplanar with the ground or polished surface **96***s* of each chip **72** and with the ground or polished surface **98***s* of the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a*.

[0180] Alternatively, FIGS. **38** and **39** show another technique to form the structure illustrated in FIG. **37**. Referring to FIG. **38**, after the steps illustrated in FIGS. **33** and **34** or in FIGS. **33** and **35**, an encapsulation/gap filling material **98**, such as polysilicon or silicon oxide, can be formed on the backside of the semiconductor substrate **96** of each chip **72**, on the dummy substrate(s) **165** and in the gaps **4***a* and **8***a*, and then a polymer **99**, such as molding compound, polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO), can be formed on the encapsulation/gap filling material **98** and in the gaps **4***a* and **8***a*. The encapsulation/gap filling material **98** in the gaps **4***a* and **8***a* may have a vertical thickness T**11**, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers.

[0181] Next, referring to FIG. **39**, a mechanical grinding process can be performed, e.g., by using an abrasive or grinding pad with water to grind the polymer **99**, the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72** and the dummy substrate(s) **165** until all of the polymer **99** is removed and until a predetermined vertical thickness T**12** of the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a* is reached. The predetermined vertical thickness T**12** can be, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers. The abrasive or grinding pad can be provided with rough grit having an average grain size, e.g., between 0.5 and micrometers for performing the mechanical grinding process. Thereafter, a chemical-mechanical-polishing (CMP) process can be performed, e.g., by using a polish pad with a slurry containing chemicals and a fine abrasive like silica with an average grain size, e.g., between 0.02 and 0.05 micrometers to polish the dummy substrate(s) **165**, the backside of the semiconductor substrate **96** of each chip **72** and the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a* until the semiconductor substrate **96** of one of the chips **72** is thinned to the thickness T**8** between 1 and 30 micrometers, and preferably between 2 and 5 micrometers, between 2 and 10 micrometers, between 2 and 20 micrometers, or between 3 and 30 micrometers, as shown in FIG. **37**.

[0182] After the chemical-mechanical-polishing (CMP) process, the polished surface **96***s* of the semiconductor substrate **96**, at the backside of each chip **72**, and the polished surface(s) **165***s* of the dummy substrate(s) **165** can be substantially flat and not covered by the encapsulation/gap filling material **98**. The polished surface(s) **165***s* may be substantially coplanar with the polished surface **96***s* of each chip **72** and with the polished surface **98***s* of the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a*. The polished surfaces **96***s*, **165***s* and **98***s* may have a micro-roughness, e.g., less than 20 nanometers. The chemical-mechanical-polishing (CMP) process, using a very fine abrasive like silica and a relatively weak chemical attack, will create the surfaces **96***s*, **165***s* and **98***s* almost without deformation and scratches, and this means that the chemical-mechanical-polishing (CMP) process is very well suited for the final polishing step, creating the clean surfaces **96***s*, **165***s* and **98***s*. Using the mechanical grinding process and the chemical-mechanical-polishing (CMP) process can be performed to create a very thin semiconductor substrate **96** of each chip **72**. Accordingly, after the

IPR2026-00067
TSMC EX1019 Page 262

chemical-mechanical-polishing (CMP) process, each of the chips **72** can be thinned to a thickness, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, the dummy substrate(s) **165** can be thinned to the thickness T**9**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a* can be thinned to the thickness T**10**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers.

[0183] Referring to FIG. **40**, after forming the structure illustrated in FIG. **37**, a dielectric layer **88** is formed on the surfaces **96***s*, **165***s* and **98***s*. The dielectric layer **88** may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0184] The dielectric layer **88**, for example, can be an inorganic layer formed by, e.g., a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. The inorganic layer can be, e.g., a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC), or a layer including silicon oxide, silicon nitride, silicon carbon nitride and silicon oxynitride. The inorganic layer may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0185] Alternatively, the dielectric layer **88** can be a polymer layer, such as a layer of polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO), formed by, e.g., a process including a spin coating process, a dispensing process, a molding process, or a screen printing process. The polymer layer may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0186] Alternatively, the dielectric layer **88** can be composed of multiple inorganic layers which include an etch stop layer, such as etch stop layer of silicon oxynitride. The etch stop layer will later be used to stop etching when etching patterns into the dielectric layer **88**. In this case, the dielectric layer **88**, for example, can be composed of a first silicon-oxide layer on the surfaces **96***s*, **165***s* and **98***s*, a silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and a second silicon-oxide layer having a thickness, e.g., between 0.1 and 5 micrometers or between 0.3 and 1.5 micrometers on the silicon-oxynitride layer.

[0187] Next, referring to FIG. **41**, multiple through vias **164***v*, including through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, are formed in the chips **72** and in the dummy substrate (s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**, by the following steps. First, a photoresist layer, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, is formed on the dielectric layer **88** by using a suitable process, such as spin coating process or lamination process. Next, a photo exposure process using a 1X stepper and a development process using a chemical solution can be employed to form multiple openings, exposing the dielectric layer **88**, in the photoresist layer. The photoresist layer may have a thickness, e.g., between 3 and 50 micrometers. Next, the dielectric layer **88** under the openings in the photoresist layer is removed by using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **165** under the openings in the photoresist layer and the chips **72** under the openings in the photoresist layer are etched away until predetermined regions of the layers **106** and **114** in the chips **72** and predetermined regions of the conduction layer **56** of the metal interconnects **1** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **164***v*, including the vias **164***a*-**164***e*, are formed in the chips **72** and in the dummy substrate(s) **165**, exposing the predetermined regions of the conduction layer **56** of the metal interconnects **1** and exposing the predetermined regions of the layers **114** and **106** of the chips **72**. The through via **164***a* is formed in the dummy substrate **165**, the through vias **164***b* and **164***c* are formed in one of the chips **72**, and the through vias **164***d* and **164***e* are formed in another one of the chips **72**.

[0188] Alternatively, another technique to form the through vias **164***v* in the chips **72** and in the dummy substrate(s) **165** can be performed by the following steps. First, a photoresist layer, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **88** by using, e.g., a spin coating process or a lamination process. Next, a photo exposure process using a 1X stepper and a development process using a chemical solution can be employed to form multiple openings, exposing the dielectric layer **88**, in the photoresist layer. Next, multiple openings are formed in the dielectric layer **88** and under the openings in the photoresist layer, exposing the dummy substrate(s) **165** and the semiconductor substrates **96** of the chips **72**, by removing the dielectric layer **88** under the openings in the photoresist layer using, e.g., an anisotropic plasma etching process. Next, the photoresist layer is removed by using, e.g., an organic chemical. Next, the dummy substrate(s) **165** under the openings in the dielectric layer **88** and the chips **72** under the openings in the dielectric layer **88** can be etched away until the predetermined regions of the layers **114** and **106** in the chips **72** and the predetermined regions of the conduction layer **56** of the metal interconnects **1** are exposed by the openings in the dielectric layer **88**. Accordingly, the through vias **164***v*, including the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, can be formed in the chips **72** and in the dummy substrate(s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**. The through via **164***a* is formed in the dummy substrate **165**, the through vias **164***b* and **164***c* are formed in one of the chips **72**, and the through vias **164***d* and **164***e* are formed in another one of the chips **72**. Each of the through vias **164***v*, such as the through via **164***a*, **164***b*, **164***c*, **164***d*, or **164***e*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0189] One of the through vias **164***v*, such as the through via **164***a*, passes through the dielectric layer **88**, the dummy substrate **165**, the layer **116**, and the insulating or dielectric layer **66**, exposing the conduction layer **56** of one of the metal interconnects **1**. Another one of the through vias **164***v*, such as the through via **164***b*, passes through the dielectric layer **88**,

through the semiconductor substrate **96**, dielectric layers **82**, **108**, **104** and **100**, and passivation layer **74** of one of the chips **72**, through the layer **116**, and through the insulating or dielectric layer **66**, exposing the conduction layer **56** of one of the metal interconnects **1**. Another one of the through vias **164***v*, such as the through via **164***c*, passes through the dielectric layer **88** and through the semiconductor substrate **96** and dielectric layer **100** of one of the chips **72**, exposing the interconnect or metal trace **55***c* in the interconnection layer **106** of the one of the chips **72**. Another one of the through vias **164***v*, such as the through via **164***d*, passes through the dielectric layer **88** and through the semiconductor substrate **96** and dielectric layers **100**, **104** and **108** of one of the chips **72**, exposing the interconnect or metal trace **55***b* in the patterned metal layer **114** of the one of the chips **72**. Another one of the through vias **164***v*, such as the through via **164***e*, passes through the dielectric layer **88**, through the semiconductor substrate **96**, dielectric layers **82**, **108**, **104** and **100**, and passivation layer **74** of one of the chips **72**, through the layer **116**, and through the insulating or dielectric layer **66**, exposing the interconnect or metal trace **55***a* in the interconnection layer **106** of the one of the chips **72** and exposing the conduction layer **56** of one of the metal interconnects **1**. A supporter **802** provided by the layers **66**, **116**, **74**, **82** and **108** is between the conduction layer **56** of the metal interconnect **1***b* and the interconnect or metal trace **55***a* in the interconnection layer **106** exposed by the through via **164***e* for the purpose of supporting the exposed interconnect or metal trace **55***a*. The supporter **802** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. FIGS. **42**-**44** are three examples of schematic top perspective views showing the through via **164***e* and the interconnect or metal trace **55***a* illustrated in FIG. **41**.

[0190] As shown in FIGS. **41** and **42**, the through via **164***e* in one of the chips **72** exposes the interconnect or metal trace **55***a* in the one of the chips **72** and exposes two regions of the conduction layer **56** of the metal interconnect **1***b* that is under the one of the chips **72**. The interconnect or metal trace **55***a* has a line-shaped region, exposed by the through via **164***e*, extending in a horizontal direction from a side of the through via **164***e* to the opposite side of the through via **164***e* through a center of the through via **164***e*. The previously described supporter **802**, between the conduction layer **56** of the metal interconnect **1***b* and the exposed line-shaped region of the interconnect or metal trace **55***a* in the interconnection layer **106**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **55***a*. Preferably, the through via **164***e* can be, but is not limited to, a circular shape from a top perspective view.

[0191] As shown in FIGS. **41** and **43**, the through via **164***e* in one of the chips **72** exposes the interconnect or metal trace **55***a* in the one of the chips **72** and exposes a region of the conduction layer **56** of the metal interconnect **1***b* that is under the one of the chips **72**. The interconnect or metal trace **55***a* has a peninsula region, exposed by the through via **164***e*, extending in a horizontal direction from one side of the through via **164***e* at least to a center of the through via **164***e*, but does not reach to the opposite side of the through via **164***e*; the interconnect or metal trace **55***a* has an end exposed by the through via **164***e*. The previously described supporter **802**, between the conduction layer **56** of the metal interconnect **1***b* and the exposed peninsula region of the interconnect or metal trace **55***a* in the interconnection layer **106**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **55***a*. Preferably, the through via **164***e* can be, but is not limited to, a circular shape from a top perspective view.

[0192] As shown in FIGS. **41** and **44**, the through via **164***e* in one of the chips **72** exposes the interconnect or metal trace **55***a* in the one of the chips **72** and exposes a region of the conduction layer **56** of the metal interconnect **1***b* that is under the one of the chips **72**. The interconnect or metal trace **55***a* has a peninsula region, exposed by the through via **164***e*, extending in a horizontal direction from one side of the through via **164***e* at least to a center of the through via **164***e*, but does not reach to the opposite side of the through via **164***e*; the interconnect or metal trace **55***a* has a circular end exposed by the through via **164***e*. The previously described supporter **802**, between the conduction layer **56** of the metal interconnect **1***b* and the exposed peninsula region of the interconnect or metal trace **55***a* in the interconnection layer **106**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **55***a*. Preferably, the through via **164***e* can be, but is not limited to, a circular shape from a top perspective view.

[0193] FIG. **42**A is an example of a schematic top perspective view showing the through via **164***e* and the interconnect or metal trace **55***a* illustrated in FIG. **41**. In this case, the through via **164***e* can be, but is not limited to, oval-shaped and has a width W**3**, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers. The oval-shaped through via **164***e* in one of the chips **72** exposes the interconnect or metal trace **55***a* in the one of the chips **72** and exposes two regions of the conduction layer **56** of the metal interconnect **1***b* that is under the one of the chips **72**. The interconnect or metal trace **55***a* has a line-shaped region, exposed by the oval-shaped through via **164***e*, extending in a horizontal direction from a side of the oval-shaped through via **164***e* to the opposite side of the oval-shaped through via **164***e* through a center of the oval-shaped through via **164***e*. The previously described supporter **802**, between the conduction layer **56** of the metal interconnect **1***b* and the exposed line-shaped region of the interconnect or metal trace **55***a* in the interconnection layer **106**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **55***a*. The interconnect or metal trace **55***a* exposed by the oval-shaped through via **164***e* has a width W**4**, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 20 micrometers, between 0.3 and 10 micrometers, between 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. A horizontal distance S**2** between an endpoint of the long axis of the oval-shaped through via **164***e* and an edge, which is closer to the endpoint than the other opposite edge, of the interconnect or metal trace **55***a* exposed by the oval-shaped through via **164***e* can be, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers.

[0194] Next, referring to FIG. **45**, a dielectric layer **90** is formed on a top surface of the dielectric layer **88**, on the conduction layer **56**, exposed by the through vias **164***v* (such as the through vias **164***a*, **164***b* and **164***e*), of the metal interconnects **1**, on the layers **106** and **114**, exposed by the through

vias **164***v* (such as the through vias **164***c*, **164***d* and **164***e*), of the chips **72**, and on sidewalls of the through vias **164***v*.

[0195] The dielectric layer **90** can be composed of an insulating material. For example, the dielectric layer **90** can be an inorganic layer having a thickness, e.g., between 20 nanometers and 1 micrometer, and the inorganic layer can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC). Alternatively, the dielectric layer **90** can be a polymer layer having a thickness, e.g., between 1 and 10 micrometers, and preferably between 1 and 5 micrometers, and the polymer layer can be a layer of polyimide, benzocyclobutene (BCB), epoxy, polyphenylene oxide (PPO), or polybenzoxazole (PBO).

[0196] Next, referring to FIG. **46**, a photoresist layer **162**, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **90** by using, e.g., a spin coating process or a lamination process. Next, a photo exposure process using a 1X stepper and a development process using a wet chemical can be employed to form multiple openings **162***a*, exposing the dielectric layer **90**, in the photoresist layer **162**. The photoresist layer **162** may have a thickness, e.g., between 0.5 and 30 micrometers.

[0197] Next, referring to FIG. **47**, the dielectric layer **90** formed on the layers **56**, **106** and **114** and on the top surface of the dielectric layer **88** under the openings **162***a* can be removed by, e.g., etching the dielectric layer **90** under the openings **162***a* using an anisotropic plasma etching process. The dielectric layer **90** at bottoms of the through vias **164***v*, on the top surface of the dielectric layer **88** under the openings **162***a*, and on a top surface of the interconnect or metal trace **55***a* over the supporter **802** can be etched away. Accordingly, the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, the top surface of the dielectric layer **88** under the openings **162***a*, and the interconnect or metal trace **55***a* over the supporter **802** are exposed by the openings **162***a*, and the dielectric layer **90** remains on the sidewalls of the through vias **164***v*, so called as sidewall dielectric layers in the through vias **164***v*. The sidewall dielectric layers **90** are formed on the sidewalls of the through vias **164***v* in the chips **72** or in the dummy substrate(s) **165** and are enclosed by the semiconductor substrates **96** of the chips **72** or by the dummy substrate(s) **165**.

[0198] Next, referring to FIG. **48**, multiple trenches **88***t*, damascene openings, can be formed in the dielectric layer **88** by etching the dielectric layer **88** and the sidewall dielectric layers **90** under the openings **162***a* to a depth D**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers, using, e.g., an anisotropic plasma etching process. Preferably, the dielectric layer **88** and the sidewall dielectric layers **90** have a same material, such as silicon nitride, silicon oxide, or silicon oxynitride. After the etching process, the dielectric layer **88** under the trenches **88***t* has a remaining thickness T**13**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0199] Alternatively, an etching-stop technique may be applied to the process of forming the trenches **88***t* in the dielectric layer **88**. In this case, the dielectric layer **88** is composed of the previously described inorganic layers, e.g., including the first silicon-oxide layer on the surfaces **96***s*, **165***s* and **98***s*, the silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and the second silicon-oxide layer on the silicon-oxynitride layer. The trenches **88***t* can be formed in the dielectric layer **88** by etching the second silicon-oxide layer of the dielectric layer **88** under the openings **162***a* and the sidewall dielectric layers **90** under the openings **162***a* until the silicon-oxynitride layer of the dielectric layer **88** is exposed by the openings **162***a*. Accordingly, the trenches **88***t* are formed in the second silicon-oxide layer of the dielectric layer **88**, and the remaining dielectric layer **88**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, under the trenches **88***t* has a thickness T**13**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0200] Next, referring to FIG. **49**, the photoresist layer **162** is removed by using, e.g., an organic chemical. The trenches **88***t* formed in the dielectric layer **88** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The sidewall dielectric layers **90** formed on the sidewalls of the through vias **164***v* (such as the through vias **164***b*, **164***c*, **164***d* and **164***e*) in the chips **72** can prevent transition metals, such as copper, sodium or moisture from penetrating into IC devices of the chips **72**. FIG. **50** is a schematic top perspective view showing the through vias **164***v*, the trenches **88***t* and the sidewall dielectric layers **90** shown in FIG. **49** according an embodiment of the present invention, and FIG. **49** is a cross-sectional view cut along the line H-H shown in FIG. **50**.

[0201] Next, referring to FIG. **51**, an adhesion/barrier layer **92** having a thickness, e.g., smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, can be formed on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on sidewalls and bottoms of the trenches **88***t*, on the dielectric layer **90**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The adhesion/barrier layer **92** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **94** having a thickness, e.g., smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, can be formed on the adhesion/barrier layer **92** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a conduction layer **86** having a thickness, e.g., between 0.5 and 20 micrometers or between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, can be formed on the seed layer **94** by using, e.g., an electroplating process.

[0202] The adhesion/barrier layer **92** may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness, e.g., smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **94** may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness, e.g., smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers. The conduction layer **86** may include or can be

an electroplated metal layer of copper, gold, or silver having a thickness, e.g., between 0.5 and 20 micrometers or between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0203] Next, referring to FIG. **52**, by using a grinding or polishing process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, the layers **92**, **94** and **86** outside the trenches **88***t* can be removed, and the dielectric layer **90** on the top surface of the dielectric layer **88** can be removed. Accordingly, the dielectric layer **88** has an exposed top surface **88***s* that can be substantially coplanar with the ground or polished surface **86***s* of the conduction layer **86** in the trenches **88***t*, and the surfaces **86***s* and **88***s* can be substantially flat. The dielectric layer **88** has a thickness T**14**, between the exposed top surface **88***s* and the surface **96***s* or **165***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers or between 2 and 5 micrometers. The adhesion/barrier layer **92** and the seed layer **94** are at sidewalls and a bottom of the conduction layer **86** in the trenches **88***t*, and the sidewalls and the bottom of the conduction layer **86** in the trenches **88***t* are covered by the adhesion/barrier layer **92** and the seed layer **94**.

[0204] In a first alternative, after the steps of removing the layers **92**, **94** and **86** outside the trenches **88***t* and removing the dielectric layer **90** on the top surface of the dielectric layer **88**, the adhesion/barrier layer **92** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t*, on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewall dielectric layers **90**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0205] In a second alternative, after the steps of removing the layers **92**, **94** and **86** outside the trenches **88***t* and removing the dielectric layer **90** on the top surface of the dielectric layer **88**, the adhesion/barrier layer **92** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t*, on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewall dielectric layers **90**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0206] In a third alternative, after the steps of removing the layers **92**, **94** and **86** outside the trenches **88***t* and removing the dielectric layer **90** on the top surface of the dielectric layer **88**, the adhesion/barrier layer **92** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t*, on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewall dielectric layers **90**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0207] After the steps of removing the layers **92**, **94** and **86** outside the trenches **88***t* and removing the dielectric layer **90** on the top surface of the dielectric layer **88**, the layers **92**, **94** and **86** in the trenches **88***t* compose multiple metal interconnects (or damascene metal traces) **2**, including metal interconnects **2***a* and **2***b*, in the trenches **88***t*. The layers **92**, **94** and **86** in the through vias **164***v* compose multiple metal plugs (or metal vias) **6***p* in the through vias **164***v*, including metal plugs (or metal vias) **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e* as shown in FIG. **49**, respectively. Each of the metal plugs **6***p* in the chips **72** and in the dummy substrate(s) **165** is enclosed by one of the sidewall dielectric layers **90** in the through vias **164***v*. The metal plug **6***a* is formed in the dummy substrate **165**, the metal plugs **6***b* and **6***c* are formed in one of the chips **72**, and the metal plugs **6***d* and **6***e* are formed in another one of the chips **72**. These metal plugs **6***p* formed in the chips **72** and in the dummy substrate(s) **165** can connect the metal interconnects **2** and the semiconductor devices **102** in the chips **72** and connect the metal interconnects **1** and **2**. The supporter **802** and the interconnect or metal trace **55***a*, in the interconnection layer **106**, on the supporter **802** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **106** is positioned, of the metal plug **6***e*. The metal interconnects **2**, such as **2***a* and **2***b*, in the trenches **88***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0208] For example, one of the metal plugs **6***p*, such as the metal plug **6***a*, can be formed in the dummy substrate **165** and formed on a contact point, at a bottom of one of the through vias **164***v* (such as the through via **164***a*), of the conduction layer **56** of one of the metal interconnects **1**, such as the metal interconnect **1***b*. Another one of the metal plugs **6***p*, such as the metal plug **6***e*, can be formed in one of the chips **72**, formed on a contact point of the interconnect or metal trace **55***a* over a supporter (such as the supporter **802**) that is between two lower left and right portions of the another one of the metal plugs **6***p* (such as the metal plug **6***e*), and formed

on another contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***e*), of the conduction layer **56** in the one of the metal interconnects **1**, such as the metal interconnect **1***b*. Another one of the metal plugs **6***p*, such as the metal plug **6***d*, can be formed in the one of the chips **72** and formed on a contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***d*), of the interconnect or metal trace **55***b* in the one of the chips **72**. Another one of the metal plugs **6***p*, such as the metal plug **6***b*, can be formed in another one of the chips **72** and formed on another contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***b*), of the conduction layer **56** in another one of the metal interconnects **1**, such as the metal interconnect **1***a*. Another one of the metal plugs **6***p*, such as the metal plug **6***c*, can be formed in the another one of the chips **72** and formed on a contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***c*), of the interconnect or metal trace **55***c* in the another one of the chips **72**.

[0209] The metal interconnect **2***a* can be formed over the dummy substrate(s) **165**, over multiple of the chips **72**, and across multiple edges of the multiple of the chips **72**. The metal interconnect **2***a* can be connected to a contact point, at a bottom of the through via **164***b*, of the metal interconnect **1***a* through the metal plug **6***b* in one of the chips **72**, can be connected to a contact point, at a bottom of the through via **164***c*, of the interconnect or metal trace **55***c* in the one of the chips **72** through the metal plug **6***c* in the one of the chips **72**, and can be connected to a contact point, at a bottom of the through via **164***d*, of the interconnect or metal trace **55***b* in another one of the chips **72** through the metal plug **6***d* in the another one of the chips **72**. These contact points at the bottoms of the through vias **164***b*, **164***c* and **164***d* can be connected to each other through the metal interconnect **2***a*.

[0210] The metal interconnect **2***b* can be formed over multiple of the chips **72** to connect multiple of the semiconductor devices **102** in the multiple of the chips **72**. The metal interconnect **2***b* can be connected to a contact point, at a bottom of the through via **164***e*, of the metal interconnect **1***b* through the metal plug **6***e* in one of the chips **72**, can be connected to one or more of the semiconductor devices **102** in the one of the chips **72** through the metal plug **6***e* and the interconnect or metal trace **55***a* in the one of the chips **72**, and can be connected to a contact point, at a bottom of another one of the through vias **164***v*, of the interconnect or metal trace **55***a*, **55***b* or **55***c* in another one of the chips **72** through another one of the metal plugs **6***p* in the another one of the chips **72**.

[0211] Accordingly, one of the semiconductor devices **102** in one of the chips **72** can be connected to another one of the semiconductor devices **102** in the one of the chips **72** or in another one of the chips **72** through one of the metal interconnects **2**, such as **2***a* or **2***b*, and can be connected to a contact point, at a bottom of one of the through vias **164***v* (such as the through via **164***a*, **164***b*, or **164***e*), of the conduction layer **56** of one of the metal interconnects **1**, such as **1***a* or **1***b*, through the one of the metal interconnects **2**. Each of the metal interconnects **2** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0212] Alternatively, the element **72** not only can indicate a chip, but also can indicate a wafer. When the element **72** is a wafer, the element **68** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0213] Referring to FIG. **53**, after forming the structure illustrated in FIG. **52**, an insulating or dielectric layer **120** can be formed on the ground or polished surface **92***s* of the adhesion/barrier layer **92**, on the ground or polished surface **94***s* of the seed layer **94**, on the ground or polished surface **86***s* of the conduction layer **86**, and on the exposed top surface **88***s* of the dielectric layer **88**. The insulating or dielectric layer **120** may have a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers.

[0214] The insulating or dielectric layer **120**, for example, may include or can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC) with a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers, formed by a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process.

[0215] Alternatively, the insulating or dielectric layer **120** may include or can be a polymer layer with a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers, formed by, e.g., a process including a spin coating process and a curing process. The polymer layer can be a layer of polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or epoxy.

[0216] Next, referring to FIG. **54**, a dummy substrate **158** can be attached onto the insulating or dielectric layer **120**, e.g., by the following steps. First, a glue layer **140** having a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers, can be formed on a top surface of the insulating or dielectric layer **120** or on a bottom surface of the dummy substrate **158** by using, e.g., a spin coating process, a lamination process, a spraying process, a dispensing process, or a screen printing process. Next, the glue layer **140** can be optionally pre-cured or baked. Next, the dummy substrate **158** can be placed over the insulating or dielectric layer **120** with the glue layer **140** between the insulating or dielectric layer **120** and the dummy substrate **158**. Next, the glue layer **140** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **140**. Accordingly, the dummy substrate **158** can be joined with the insulating or dielectric layer **120** using the glue layer **140**. The glue layer **140** can be a polymer layer, such as a layer of epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or silosane, with a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers.

[0217] Alternatively, the glue layer **140** can be replaced with an inorganic insulating layer, such as silicon oxide, that can be formed on the insulating or dielectric layer **120**. In this case, the dummy substrate **158** can be joined with the insulating or dielectric layer **120**, e.g., by bonding an inorganic insulating layer, such as silicon oxide, of the dummy substrate **158** onto the inorganic insulating layer **140**, such as silicon oxide. The silicon-oxide layer of the dummy substrate **158** contacts the silicon-oxide layer **140**.

[0218] The dummy substrate **158** can be a round wafer, a dummy silicon wafer, a rectangular panel, or a substrate of polysilicon, glass, silicon or ceramic. The dummy substrate **158**, before being ground or polished as mentioned in the following processes, may have a thickness, e.g., greater than 100 micrometers, such as between 100 and 1,500 micrometers, and preferably between 200 and 500 micrometers or between 100 and 300 micrometers.

[0219] In one embodiment, there are no circuits preformed in the dummy substrate **158** or on a top or bottom surface of the dummy substrate **158** before the dummy substrate **158** is joined with the insulating or dielectric layer **120**. The dummy substrate **158** may have the top surface with a profile that is substantially same as that of the top surface of the carrier **11**.

[0220] Next, referring to FIG. **55**, multiple openings **158***a* are formed in the dummy substrate **158**, exposing the glue layer **140**, by a process, e.g., including a photolithography process and an etching process, which can be referred to as the previous illustration of FIGS. **29** and **31**. Alternatively, when the glue layer **140** is replaced with the silicon-oxide layer and the dummy substrate **158** has the silicon-oxide layer bonded with the silicon-oxide layer **140**, the openings **158***a* are formed in the dummy substrate **158**, exposing the silicon-oxide layer of the dummy substrate **158**, by a process, e.g., including a photolithography process and an etching process, which can be referred to as the previous illustration of FIGS. **29** and **31**. FIG. **56** shows a schematic top view of the dummy substrate **158** with the openings **158***a* as shown in FIG. **55**, and FIG. **55** can be a cross-sectional view cut along the line I-I shown in FIG. **56**.

[0221] Alternatively, a hard mask (not shown), such as silicon oxide or silicon nitride, may be formed on the dummy substrate **158** shown in FIG. **55**, e.g., by the following steps. First, the hard mask of silicon oxide or silicon nitride can be formed on the dummy substrate **158** shown in FIG. **54**. Next, a photoresist layer can be formed on the hard mask by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings, exposing multiple regions of the hard mask, in the photoresist layer. Next, multiple openings are formed in the hard mask and under the openings in the photoresist layer, exposing multiple regions of the dummy substrate **158**, by using, e.g., a wet etching process or a plasma etching process. Next, the photoresist layer is removed by using, e.g., an organic chemical. Next, multiple openings **158***a* are formed in the dummy substrate **158** and under the openings in the hard mask, exposing the glue layer **140**, by using, e.g., a chemical etching process or a plasma etching process. Alternatively, when the glue layer **140** is replaced with the silicon-oxide layer and the dummy substrate **158** has the silicon-oxide layer bonded with the silicon-oxide layer **140**, the openings **158***a* are formed in the dummy substrate **158** and under the openings in the hard mask, exposing the silicon-oxide layer of the dummy substrate **158**, by using, e.g., a chemical etching process or a plasma etching process. The hard mask will be removed by the following grinding or polishing process.

[0222] Next, referring to FIG. **57**, multiple chips **118** can be mounted over the insulating or dielectric layer **120** and in the openings **158***a* in the dummy substrate **158**, and the chips **118** have active sides at bottoms of the chips **118** and backsides at tops of the chips **118**. In one case, one of the chips **118** may have different circuit designs from those of another one of the chips **118**. Also, in another case, one of the chips **118** may have same circuit designs as those of another one of the chips **118**. Alternatively, one of the chips **118** may have a different area (top surface) or size from that of another one of the chips **118**. Also, in another case, one of the chips **118** may have a same area (top surface) or size as that of another one of the chips **118**. FIG. **58** is an example of a schematical top view showing the chips **118** mounted in the openings **158***a* in the dummy substrate **158**, and FIG. **57** is a cross-sectional view cut along the line J-J shown in the schematical top view of FIG. **58**.

[0223] Mounting the chips **118** over the insulating or dielectric layer **120** and in the openings **158***a* can be performed, e.g., by first forming a glue material (not shown) on the active sides of the chips **118** or on the glue layer **140**, next placing the chips **118** in the openings **158***a* and over the glue layer **140** with the glue material contacting the glue layer **140**, and then curing the glue material in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue material. Accordingly, the chips **118** can be joined with the glue layer **140** using the glue material.

[0224] Each of the chips **118** can include a semiconductor substrate **124**, multiple semiconductor devices **13** in and/or on the semiconductor substrate **124**, a passivation layer **21** under the semiconductor substrate **124**, multiple dielectric layers **78**, **28**, **38** and **40** between the semiconductor substrate **124** and the passivation layer **21**, a patterned metal layer **19** between the semiconductor substrate **124** and the passivation layer **21**, an interconnection layer **17** between the semiconductor substrate **124** and the passivation layer **21**, multiple via plugs **19***a* in the dielectric layer **28**, and multiple via plugs **17***a* in the dielectric layer **40**. The semiconductor substrate **124** is at the backside of each chip **118**, and the semiconductor devices **13**, the passivation layer **21**, the patterned metal layer **19**, the interconnection layer **17**, the dielectric layers **78**, **28**, **38** and **40**, and the via plugs **17***a* and **19***a* are at the active side of each chip **118**.

[0225] The semiconductor substrate **124** can be a suitable substrate, such as silicon substrate, silicon-germanium (SiGe) substrate, or gallium-arsenide (GaAs) substrate. The semiconductor substrate **124** before being thinned as mentioned in the following processes may have a thickness, e.g., greater than 100 micrometers, such as between 100 and 500 micrometers, and preferably between 150 and 250 micrometers or between 100 and 300 micrometers.

[0226] Each of the semiconductor devices **13** can be a P-channel metal-oxide-semiconductor (PMOS) transistor, an N-channel metal-oxide-semiconductor (NMOS) transistor, a double-diffused metal-oxide-semiconductor (DMOS) transistor, or a bipolar transistor. Each of the semiconductor devices **13** can be provided for a NOR gate, a NAND gate, an AND gate, an OR gate, a static-random-access-memory (SRAM) cell, a dynamic-random-access-memory (DRAM) cell, a flash memory cell, a non-volatile memory cell, an erasable programmable read-only memory (EPROM) cell, a read-only memory (ROM) cell, a magnetic-random-access-memory (MRAM) cell, a sense amplifier, an inverter, an operational amplifier, an adder, a multiplexer, a diplexer, a multiplier, an analog-to-digital (A/D) converter, a digital-to-analog (D/A) converter, an analog circuit, a complementary-metal-oxide-semiconductor (CMOS) sensor, or a charge coupled device (CCD).

[0227] The passivation layer **21** may include or can be an inorganic dielectric layer having a bottom surface attached to the glue layer **140**, and the inorganic dielectric layer can be a layer of silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN) or silicon oxynitride (such as SiON) with a thickness, e.g., between 0.3 and 1.5 micrometers. Alternatively, each of the chips **118** may further contain an organic polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), epoxy, or silosane, with a thickness, e.g., greater than 3 micrometers, such as between 3 and 20 micrometers, and preferably between 5 and 12 micrometers, under and on the bottom surface of the inorganic dielectric layer of the passivation layer **21**. In this case, the organic polymer layer has a bottom surface attached to the glue layer **140**. The organic polymer layer has a top surface contacting the bottom surface of the inorganic dielectric layer of the passivation layer **21**.

[0228] Alternatively, multiple openings (not shown) each having a width, e.g., between 0.5 and 100 micrometers, and preferably between 20 and 60 micrometers, may be formed in the passivation layer **21** and expose multiple contact points of the patterned metal layer **19**.

[0229] The dielectric layer **78** can be between the passivation layer **21** and the dielectric layer **28**. The dielectric layer **28** can be between the dielectric layers **78** and **38** and between the layers **17** and **19**. The dielectric layer **38** can be between the dielectric layers **40** and **28**. Each of the dielectric layers **78**, **28** and **38** may include silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), silicon oxycarbide (such as SiOC), or a low-k material having a dielectric constant between 1.8 and 3 (such as fluorinated silicate glass (FSG) or Black-diamond). Each of the dielectric layers **78**, **28** and **38** may have a thickness, e.g., between 10 nanometers and 2 micrometers, and preferably between 50 nanometers and 1 micrometer.

[0230] The dielectric layer **40** between the dielectric layer **38** and the semiconductor substrate **124** and between the interconnection layer **17** and the semiconductor substrate **124** may include or can be a layer of phosphorous silicate glass (PSG), borophospho-silicate glass (BPSG), silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or a low-k material having a dielectric constant between 1.8 and 3 (such as fluorinated silicate glass (FSG) or Black-diamond). The dielectric layer **40** may have a thickness, e.g., between 10 nanometers and 1 micrometer.

[0231] The patterned metal layer **19**, for example, may include an aluminum-copper-alloy layer having a thickness, e.g., between 0.3 and 3 micrometers and a titanium-containing layer having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers. The titanium-containing layer can be between the dielectric layer **28** and the aluminum-copper-alloy layer and on the aluminum-copper-alloy layer, and the aluminum-copper-alloy layer can be between the passivation layer **21** and the titanium-containing layer. The titanium-containing layer can be a single layer of titanium, titanium nitride, or a titanium-tungsten alloy having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers.

[0232] Alternatively, the patterned metal layer **19** may include a nickel layer having a thickness, e.g., between 0.5 and 3 micrometers, and a gold layer having a thickness, e.g., between 0.01 and 1 micrometers under and on the nickel layer, in the view from the side of the dielectric layer **28** to the side of the passivation layer **21**. The nickel layer is between the dielectric layer **28** and the gold layer, and the gold layer is between the nickel layer and the passivation layer **21**.

[0233] Alternatively, the patterned metal layer **19** can be formed by a damascene or double-damascene process including an electroplating process and a chemical mechanical polishing (CMP) process and can be composed of an electroplated copper layer having a bottom contacting the passivation layer **21**, an adhesion/barrier metal layer at a top and sidewalls of the electroplated copper layer, and a seed layer between the electroplated copper layer and the adhesion/barrier metal layer and on the top and sidewalls of the electroplated copper layer. The adhesion/barrier metal layer has a first portion between the top of the electroplated copper layer and the dielectric layer **28** and a second portion at the sidewalls of the electroplated copper layer. The electroplated copper layer may have a thickness, e.g., smaller than 1.5 micrometers, such as between 0.15 and 1.2 micrometers, or smaller than 3 micrometers, such as between 0.3 and 3 micrometers. The electroplated copper layer may have a width, e.g., smaller than 1 micrometer, such as between 0.05 and 1 micrometers. The seed layer may include or can be a layer of copper or a titanium-copper alloy formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, or tantalum nitride formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may have a thickness, e.g., smaller than 0.1 micrometers, such as between 0.005 and 0.1 micrometers. The sidewalls of the electroplated copper layer are covered by the adhesion/barrier metal layer and the seed layer.

[0234] The interconnection layer **17**, for example, may include carbon nanotube. Alternatively, the interconnection layer **17** can be composed of a patterned metal layer in the dielectric layer **38**. In a first alternative, the patterned metal layer **17** may include an aluminum-copper-alloy layer having a thickness, e.g., between 10 nanometers and 2 micrometers and a titanium-containing layer, such as a single layer of titanium nitride, titanium-tungsten alloy or titanium, having a thickness, e.g., smaller than 0.2 micrometers, such as between 0.02 and 0.15 micrometers. The titanium-containing layer can be on the aluminum-copper-alloy layer and between the dielectric layer **40** and the aluminum-copper-alloy layer, and the aluminum-copper-alloy layer can be in the dielectric layer **38**. In a second alternative, the patterned metal layer **17** can be formed by a damascene or double-damascene process including an electroplating process and a chemical mechanical polishing (CMP) process and can be composed of an electroplated copper layer having a bottom contacting the dielectric layer **28**, an adhesion/barrier metal layer at a top and sidewalls of the electroplated copper layer, and a seed layer between the electroplated copper layer and the adhesion/barrier metal layer and on the top and sidewalls of the electroplated copper layer. The adhesion/barrier metal layer has a first portion between the top of the electroplated copper layer and the dielectric layer **40** and a second portion at the sidewalls of the electroplated copper layer. The electroplated copper layer may have a thickness, e.g., smaller than 2 micrometers, such as between 0.15 and 1 micrometers or between 10 nanometers and 2 micrometers. The electroplated copper layer may have a width, e.g., smaller than 1 microme-

ter, such as between 0.05 and 1 micrometers. The seed layer may include or can be a layer of copper or a titanium-copper alloy formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may include or can be a layer of titanium, titanium nitride, a titanium-tungsten alloy, chromium, tantalum or tantalum nitride formed by a suitable process, such as sputtering process. The adhesion/barrier metal layer may have a thickness, e.g., smaller than 0.1 micrometers, such as between 0.005 and 0.1 micrometers. The sidewalls of the electroplated copper layer are covered by the adhesion/barrier metal layer and the seed layer.

[0235] The patterned metal layer **19** in the dielectric layer **78** can be connected to the interconnection layer **17** in the dielectric layer **38** through the via plugs **19***a* in the dielectric layer **28**. The interconnection layer **17** in the dielectric layer **38** can be connected to the semiconductor devices **13** through the via plugs **17***a* in the dielectric layer **40**. The via plugs **19***a* may include electroplated copper, tungsten, or carbon nanotube in the dielectric layer **28**. The via plugs **17***a* may include electroplated copper, tungsten, or carbon nanotube in the dielectric layer **40**.

[0236] Each of the chips **118** may include multiple interconnects or metal traces **75***a*, **75***b*, **75***c* and **75***d* provided by the interconnection layer **17**, the patterned metal layer **19** and the via plugs **17***a* and **19***a*. Each of the interconnects or metal traces **75***a*, **75***b*, **75***c* and **75***d* can be connected to one or more of the semiconductor devices **13** and can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0237] Alternatively, each of the chips **118** may further include a patterned metal layer (not shown), having a thickness greater than that of the patterned metal layer **19** and greater than that of the interconnection layer **17**, between the glue layer **140** and the passivation layer **21**. The patterned metal layer under the passivation layer **21** may include an electroplated metal layer under the passivation layer **21**, an adhesion/barrier metal layer between the electroplated metal layer and the passivation layer **21**, and a seed layer between the electroplated metal layer and the adhesion/barrier metal layer. In the view from the side of the passivation layer **21** to the side of the glue layer **140**, the adhesion/barrier metal layer can be on the seed layer, and the seed layer can be on the electroplated metal layer. Sidewalls of the electroplated metal layer are not covered by the adhesion/barrier metal layer and the seed layer. The adhesion/barrier metal layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, or nickel with a thickness, e.g., smaller than 0.6 micrometers, such as between 1 nanometer and 0.5 micrometers or between 0.005 and 0.1 micrometers. The seed layer may include or can be a layer of copper, a titanium-copper alloy, silver, gold, or nickel with a thickness, e.g., smaller than 0.8 micrometers, such as between 5 nanometers and 0.1 micrometers or between 10 nanometers and 0.8 micrometers. Each of the adhesion/barrier metal layer and the seed layer can be formed by a suitable process, such as sputtering process. The electroplated metal layer may include or can be a layer of electroplated copper, electroplated silver, or electroplated gold with a thickness, e.g., greater than 2 micrometers, such as between 2 and 30 micrometers, and preferably between 3 and 10 micrometers or between 5 and 25 micrometers.

[0238] Alternatively, when the silicon-oxide layer of the dummy substrate **158** remains on the silicon-oxide layer **140**, after forming the openings **158***a*, and is exposed by the openings **158***a* in the dummy substrate **158**, mounting the chips **118** over the insulating or dielectric layer **120** and in the openings **158***a* can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **21**, at the active side of each chip **118**, with the remaining silicon-oxide layer of the dummy substrate **158** under the passivation layer **21**. The silicon-oxide layer of the passivation layer **21** contacts the silicon-oxide layer of the dummy substrate **158**. Accordingly, the chips **118** can be joined with the insulating or dielectric layer **120** using these silicon-oxide layers.

[0239] Alternatively, another technique to form the structure illustrated in FIGS. **57** and **58** is performed by first providing a patterned dummy substrate **158**, such as patterned dummy wafer, patterned panel, patterned silicon frame, or patterned substrate of polysilicon, glass, silicon, ceramic, or polymer, with multiple openings **158***a* passing through the patterned dummy substrate **158**, next joining the patterned dummy substrate **158** with the insulating or dielectric layer **120** using the layer **140**, which can be referred to as the steps illustrated in FIG. **54**, and then mounting the chips **118** over the insulating or dielectric layer **120** and in the openings **158***a* in the patterned dummy substrate **158**, which can be referred to as the steps illustrated in FIG. **57**.

[0240] As shown in FIGS. **57** and **58**, there are multiple gaps **4***b* each between the dummy substrate **158** and one of the chips **118**, and there are multiple gaps **8***b* (one of them is shown) each between neighboring two chips **118**. Each of the gaps **4***b* may have a transverse distance or spacing D**7**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***b* may have a transverse distance or spacing D**8**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0241] FIG. **59** shows another technique to form the structure with the same cross-sectional view as shown in FIG. **57**. FIG. **57** is a cross-sectional view cut along the line J-J shown in a schematical top view of FIG. **59**. The structure shown in FIGS. **57** and **59** can be formed, e.g., by the following steps. First, the previously described glue layer **140** can be formed on the insulating or dielectric layer **120** shown in FIG. **53** by using, e.g., a spin coating process, a laminating process, a spraying process, a dispensing process, or a screen printing process. Next, the glue layer **140** can be optionally pre-cured or baked. Next, the previously described chips **118** and multiple separate dummy substrates **158** can be placed on the glue layer **140**. When a gap between neighboring two chips **118** is too great, such as greater than 500 or 1,000 micrometers, one or more of the separate dummy substrates **158** can be placed in the gap. Alternatively, when a gap between neighboring two chips **118** is small enough, such as smaller than 500 or 1,000 micrometers, there can be no separate dummy substrates **158** placed in the gap. Next, the glue layer **140** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **140**. Accordingly, the separate dummy substrates **158** and the chips **118** can be joined with the insulating or dielectric layer **120** using the glue layer **140**. The separate dummy substrates **158**, for example, can be separate silicon bars, separate dummy chips, separate dummy silicon dies, or separate substrates of polysilicon, glass, silicon, or ceramic.

[0242] Alternatively, referring to FIGS. **57** and **59**, the glue layer **140** can be replaced with a silicon-oxide layer that is formed on the insulating or dielectric layer **120**. In this case, joining the chips **118** with the layer **120** and joining the separate dummy substrates **158** with the layer **120** can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **21**, at the active side of each chip **118**, with the silicon-oxide layer **140** and by bonding another silicon-oxide layer of each of the separate dummy substrates **158** with the silicon-oxide layer **140**. The silicon-oxide layer of the passivation layer **21** of each chip **118** contacts the silicon-oxide layer **140**, and the silicon-oxide layer of each of the separate dummy substrates **158** contacts the silicon-oxide layer **140**. Accordingly, the chips **118** and the separate dummy substrates **158** can be joined with the insulating or dielectric layer **120** using these silicon-oxide layers.

[0243] As shown in FIGS. **57** and **59**, there are multiple gaps **4***b* each between one of the chips **118** and one of the separate dummy substrates **158**, and there are multiple gaps **8***b* (one of them is shown) each between neighboring two chips **118**. Each of the gaps **4***b* may have a transverse distance or spacing D**7**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***b* may have a transverse distance or spacing D**8**, e.g., smaller than 500 micrometers, such as between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. In one embodiment, there are no circuits preformed in each separate dummy substrate **158** or on a top or bottom surface of each separate dummy substrate **158** before the separate dummy substrates **158** are joined with the insulating or dielectric layer **120**.

[0244] Referring to FIG. **60**, after the steps illustrated in FIGS. **57** and **58** or in FIGS. **57** and **59**, an encapsulation/gap filling material **138**, such as polysilicon, silicon oxide, or a polymer, is formed on a backside of the semiconductor substrate **124** of each chip **118**, on the dummy substrate(s) **158**, and in the gaps **4***b* and **8***b*. If the encapsulation/gap filling material **138** is polysilicon, the polysilicon can be formed by a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. If the encapsulation/gap filling material **138** is silicon oxide, the silicon oxide can be formed by a chemical vapor deposition (CVD) process, a plasma-enhanced chemical vapor deposition (PECVD) process, or an atmospheric pressure chemical vapor deposition (APCVD) process. If the encapsulation/gap filling material **138** is a polymer, such as polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or polyphenylene oxide (PPO), the polymer can be formed by a process including a spin coating process, a dispensing process, a molding process, or a screen printing process.

[0245] Next, referring to FIG. **61**, the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158** are ground or polished by a suitable process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, until the semiconductor substrate **124** of one of the chips **118** is thinned to a thickness T**15**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Preferably, each of the chips **118**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. After the grinding or polishing process, the dummy substrate(s) **158** can be thinned to a thickness T**16**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **138** remaining in the gaps **4***b* and **8***b* may have a vertical thickness T**17**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **124***s* of the semiconductor substrate **124**, at the backside of each chip **118**, and the ground or polished surface(s) **158***s* of the dummy substrate(s) **158** can be substantially flat and not covered by the encapsulation/gap filling material **138**. The ground or polished surface(s) **158***s* may be substantially coplanar with the ground or polished surface **124***s* of each chip **118** and with the ground or polished surface **138***s* of the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b*.

[0246] Alternatively, FIGS. **62** and **63** show another technique to form the structure illustrated in FIG. **61**. Referring to FIG. **62**, after the steps illustrated in FIGS. **57** and **58** or in FIGS. **57** and **59**, an encapsulation/gap filling material **138**, such as polysilicon or silicon oxide, can be formed on the backside of the semiconductor substrate **124** of each chip **118**, on the dummy substrate(s) **158** and in the gaps **4***b* and **8***b*, and then a polymer **137**, such as molding compound, polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO), can be formed on the encapsulation/gap filling material **138** and in the gaps **4***b* and **8***b*. The encapsulation/gap filling material **138** in the gaps **4***b* and **8***b* may have a vertical thickness T**18**, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers.

[0247] Next, referring to FIG. **63**, a mechanical grinding process can be performed, e.g., by using an abrasive or grinding pad with water to grind the polymer **137**, the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118** and the dummy substrate(s) **158** until all of the polymer **137** is removed and until a predetermined vertical thickness T**19** of the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b* is reached. The predetermined vertical thickness T**19** can be, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers. The abrasive or grinding pad can be provided with rough grit having an average grain size, e.g., between 0.5 and 15 micrometers for performing the mechanical grinding process. Thereafter, a chemical-mechanical-polishing (CMP) process can be performed, e.g., by using a polish pad with a slurry containing chemicals and a fine abrasive like silica with an average grain size, e.g., between 0.02 and 0.05 micrometers to polish the dummy substrate(s) **158**, the backside of the semiconductor substrate **124** of each chip **118** and the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b* until the semiconductor substrate **124** of one of the chips **118** is thinned to the thickness T**15** between 1 and 30 micrometers, and preferably between 2 and 5 micrometers, between 2 and 10 micrometers, between 2 and 20 micrometers, or between 3 and 30 micrometers, as shown in FIG. **61**.

[0248] After the chemical-mechanical-polishing (CMP) process, the polished surface **124***s* of the semiconductor sub-

strate **124**, at the backside of each chip **118**, and the polished surface(s) **158***s* of the dummy substrate(s) **158** can be substantially flat and not covered by the encapsulation/gap filling material **138**. The polished surface(s) **158***s* may be substantially coplanar with the polished surface **124***s* of each chip **118** and with the polished surface **138***s* of the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b*. The polished surfaces **124***s*, **158***s* and **138***s* have a micro-roughness, e.g., less than 20 nanometers. The chemical-mechanical-polishing (CMP) process, using a very fine abrasive like silica and a relatively weak chemical attack, will create the surfaces **124***s*, **158***s* and **138***s* almost without deformation and scratches, and this means that the chemical-mechanical-polishing (CMP) process is very well suited for the final polishing step, creating the clean surfaces **124***s*, **158***s* and **138***s*. Using the mechanical grinding process and the chemical-mechanical-polishing (CMP) process can be performed to create a very thin semiconductor substrate **124** of each chip **118**. Accordingly, after the chemical-mechanical-polishing (CMP) process, each of the chips **118** can be thinned to a thickness, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, the dummy substrate(s) **158** can be thinned to the thickness T**16**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b* can be thinned to the thickness T**17**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers.

[0249] Referring to FIG. **64**, after forming the structure illustrated in FIG. **61**, a dielectric layer **139** is formed on the surfaces **124***s*, **158***s* and **138***s*. The dielectric layer **139** may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0250] The dielectric layer **139**, for example, can be an inorganic layer formed by, e.g., a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. The inorganic layer can be, e.g., a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC), or a layer including silicon oxide, silicon nitride, silicon carbon nitride and silicon oxynitride. The inorganic layer may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0251] Alternatively, the dielectric layer **139** can be a polymer layer, such as a layer of polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO), formed by, e.g., a process including a spin coating process, a dispensing process, a molding process, or a screen printing process. The polymer layer may have a thickness, e.g., between 0.5 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 1 and 3 micrometers.

[0252] Alternatively, the dielectric layer **139** can be composed of multiple inorganic layers which include an etch stop layer, such as etch stop layer of silicon oxynitride. The etch stop layer will later be used to stop etching when etching patterns into the dielectric layer **139**. In this case, the dielectric layer **139**, for example, can be composed of a first silicon-oxide layer on the surfaces **124***s*, **158***s* and **138***s*, a silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and a second silicon-oxide layer having a thickness, e.g., between 0.1 and 5 micrometers or between 0.3 and 1.5 micrometers on the silicon-oxynitride layer.

[0253] Next, referring to FIG. **65**, multiple through vias **156***v*, including through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**, by the following steps. First, a photoresist layer, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, is formed on the dielectric layer **139** by using a suitable process, such as spin coating process or lamination process. Next, a photo exposure process using a 1X stepper and a development process using a chemical solution can be employed to form multiple openings, exposing the dielectric layer **139**, in the photoresist layer. The photoresist layer may have a thickness, e.g., between 3 and 50 micrometers. Next, the dielectric layer **139** under the openings in the photoresist layer is removed by using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **158** under the openings in the photoresist layer and the chips **118** under the openings in the photoresist layer are etched away until predetermined regions of the layers **17** and **19** in the chips **118** and predetermined regions of the conduction layer **86** of the metal interconnects **2** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **156***v*, including the vias **156***a*-**156***f*, are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the predetermined regions of the conduction layer **86** of the metal interconnects **2** and exposing the predetermined regions of the layers **17** and **19** of the chips **118**. The through via **156***a* is formed in the dummy substrate **158**, the through vias **156***b*, **156***c* and **156***d* are formed in one of the chips **118**, and the through vias **156***e* and **156***f* are formed in another one of the chips **118**.

[0254] Alternatively, another technique to form the through vias **156***v* in the chips **118** and in the dummy substrate(s) **158** can be performed by the following steps. First, a photoresist layer, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **139** by using, e.g., a spin coating process or a lamination process. Next, a photo exposure process using a 1X stepper and a development process using a chemical solution can be employed to form multiple openings, exposing the dielectric layer **139**, in the photoresist layer. Next, multiple openings are formed in the dielectric layer **139** and under the openings in the photoresist layer, exposing the dummy substrate(s) **158** and the semiconductor substrates **124** of the chips **118**, by removing the dielectric layer **139** under the openings in the photoresist layer using, e.g., an anisotropic plasma etching process. Next, the photoresist layer is removed by using, e.g., an organic chemical. Next, the dummy substrate(s) **158** under the openings in the dielectric layer **139** and the chips **118** under the openings in the dielectric layer **139** can be etched away until the predetermined regions of the layers **17** and **19** in the chips **118** and the predetermined regions of the conduction layer **86** of the metal interconnects **2** are exposed by the openings in the dielectric layer **139**. Accordingly, the through vias **156***v*, including the

through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, can be formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**. The through via **156***a* is formed in the dummy substrate **158**, the through vias **156***b*, **156***c* and **156***d* are formed in one of the chips **118**, and the through vias **156***e* and **156***f* are formed in another one of the chips **118**. Each of the through vias **156***v*, such as the through via **156***a*, **156***b*, **156***c*, **156***d*, **156***e*, or **156***f*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0255] One of the through vias **156***v*, such as the through via **156***a*, passes through the dielectric layer **139**, the dummy substrate **158**, the layer **140**, and the insulating or dielectric layer **120**, exposing the conduction layer **86** of one of the metal interconnects **2**. Another one of the through vias **156***v*, such as the through via **156***b*, passes through the dielectric layer **139**, through the semiconductor substrate **124**, dielectric layers **78**, **28**, **38** and **40**, and passivation layer **21** of one of the chips **118**, through the layer **140**, and through the insulating or dielectric layer **120**, exposing the conduction layer **86** of one of the metal interconnects **2**. Another one of the through vias **156***v*, such as the through via **156***c*, passes through the dielectric layer **139** and through the semiconductor substrate **124** and dielectric layer **40** of one of the chips **118**, exposing the interconnect or metal trace **75***d* in the interconnection layer **17** of the one of the chips **118**. Another one of the through vias **156***v*, such as the through via **156***d*, passes through the dielectric layer **139** and through the semiconductor substrate **124** and dielectric layers **40**, **38** and **28** of one of the chips **118**, exposing the interconnect or metal trace **75***c* in the patterned metal layer **19** of the one of the chips **118**. Another one of the through vias **156***v*, such as the through via **156***f*, passes through the dielectric layer **139** and through the semiconductor substrate **124** and dielectric layers **40**, **38** and **28** of one of the chips **118**, exposing the interconnect or metal trace **75***b* in the patterned metal layer **19** of the one of the chips **118**. Another one of the through vias **156***v*, such as the through via **156***e*, passes through the dielectric layer **139**, through the semiconductor substrate **124**, dielectric layers **78**, **28**, **38** and **40**, and passivation layer **21** of one of the chips **118**, through the layer **140**, and through the insulating or dielectric layer **120**, exposing the interconnect or metal trace **75***a* in the interconnection layer **17** of the one of the chips **118** and exposing the conduction layer **86** of one of the metal interconnects **2**. A supporter **803** provided by the layers **120**, **140**, **21**, **78** and **28** is between the conduction layer **86** of the metal interconnect **2***b* and the interconnect or metal trace **75***a* in the interconnection layer **17** exposed by the through via **156***e* for the purpose of supporting the exposed interconnect or metal trace **75***a*. The supporter **803** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. FIGS. **66-68** are three examples of schematic top perspective views showing the through via **156***e* and the interconnect or metal trace **75***a* illustrated in FIG. **65**.

[0256] As shown in FIGS. **65** and **66**, the through via **156***e* in one of the chips **118** exposes the interconnect or metal trace **75***a* in the one of the chips **118** and exposes two regions of the conduction layer **86** of the metal interconnect **2***b* that is under the one of the chips **118**. The interconnect or metal trace **75***a* has a line-shaped region, exposed by the through via **156***e*, extending in a horizontal direction from a side of the through via **156***e* to the opposite side of the through via **156***e* through a center of the through via **156***e*. The previously described supporter **803**, between the conduction layer **86** of the metal interconnect **2***b* and the exposed line-shaped region of the interconnect or metal trace **75***a* in the interconnection layer **17**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **75***a*. Preferably, the through via **156***e* can be, but is not limited to, a circular shape from a top perspective view.

[0257] As shown in FIGS. **65** and **67**, the through via **156***e* in one of the chips **118** exposes the interconnect or metal trace **75***a* in the one of the chips **118** and exposes a region of the conduction layer **86** of the metal interconnect **2***b* that is under the one of the chips **118**. The interconnect or metal trace **75***a* has a peninsula region, exposed by the through via **156***e*, extending in a horizontal direction from one side of the through via **156***e* at least to a center of the through via **156***e*, but does not reach to the opposite side of the through via **156***e*; the interconnect or metal trace **75***a* has an end exposed by the through via **156***e*. The previously described supporter **803**, between the conduction layer **86** of the metal interconnect **2***b* and the exposed peninsula region of the interconnect or metal trace **75***a* in the interconnection layer **17**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **75***a*. Preferably, the through via **156***e* can be, but is not limited to, a circular shape from a top perspective view.

[0258] As shown in FIGS. **65** and **68**, the through via **156***e* in one of the chips **118** exposes the interconnect or metal trace **75***a* in the one of the chips **118** and exposes a region of the conduction layer **86** of the metal interconnect **2***b* that is under the one of the chips **118**. The interconnect or metal trace **75***a* has a peninsula region, exposed by the through via **156***e*, extending in a horizontal direction from one side of the through via **156***e* at least to a center of the through via **156***e*, but does not reach to the opposite side of the through via **156***e*; the interconnect or metal trace **75***a* has a circular end exposed by the through via **156***e*. The previously described supporter **803**, between the conduction layer **86** of the metal interconnect **2***b* and the exposed peninsula region of the interconnect or metal trace **75***a* in the interconnection layer **17**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **75***a*. Preferably, the through via **156***e* can be, but is not limited to, a circular shape from a top perspective view.

[0259] FIG. **66**A is an example of a schematic top perspective view showing the through via **156***e* and the interconnect or metal trace **75***a* illustrated in FIG. **65**. In this case, the through via **156***e* can be, but is not limited to, oval-shaped and has a width W5, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers. The oval-shaped through via **156***e* in one of the chips **118** exposes the interconnect or metal trace **75***a* in the one of the chips **118** and exposes two regions of the conduction layer **86** of the metal interconnect **2***b* that is under the one of the chips **118**. The interconnect or metal trace **75***a* has a line-shaped region, exposed by the oval-shaped through via **156***e*, extending in a horizontal direction from a side of the oval-shaped through via **156***e* to the opposite side of the

oval-shaped through via **156***e* through a center of the oval-shaped through via **156***e*. The previously described supporter **803**, between the conduction layer **86** of the metal interconnect **2***b* and the exposed line-shaped region of the interconnect or metal trace **75***a* in the interconnection layer **17**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **75***a*. The interconnect or metal trace **75***a* exposed by the oval-shaped through via **156***e* has a width W**6**, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 20 micrometers, between 0.3 and 10 micrometers, between 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. A horizontal distance S**3** between an endpoint of the long axis of the oval-shaped through via **156***e* and an edge, which is closer to the endpoint than the other opposite edge, of the interconnect or metal trace **75***a* exposed by the oval-shaped through via **156***e* can be, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers.

[0260] Next, referring to FIG. **69**, a dielectric layer **127** can be formed on a top surface of the dielectric layer **139**, on the conduction layer **86**, exposed by the through vias **156***v* (such as the through vias **156***a*, **156***b* and **156***e*), of the metal interconnects **2**, on the layers **17** and **19**, exposed by the through vias **156***v* (such as the through vias **156***c*, **156***d*, **156***e* and **156***f*), of the chips **118**, and on sidewalls of the through vias **156***v*.

[0261] The dielectric layer **127** can be composed of an insulating material. For example, the dielectric layer **127** can be an inorganic layer having a thickness, e.g., between 20 nanometers and 1 micrometer, and the inorganic layer can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC). Alternatively, the dielectric layer **127** can be a polymer layer having a thickness, e.g., between 1 and 10 micrometers, and preferably between 1 and 5 micrometers, and the polymer layer can be a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO).

[0262] Next, referring to FIG. **70**, a photoresist layer **154**, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **127** by using, e.g., a spin coating process or a lamination process, and then a photo exposure process using a 1X stepper and a development process using a wet chemical can be employed to form multiple openings **154***a*, exposing the dielectric layer **127**, in the photoresist layer **154**. The photoresist layer **154** may have a thickness, e.g., between 0.5 and 30 micrometers.

[0263] Next, referring to FIG. **71**, the dielectric layer **127** formed on the layers **17**, **19** and **86** and on the top surface of the dielectric layer **139** under the openings **154***a* can be removed by, e.g., etching the dielectric layer **127** under the openings **154***a* using an anisotropic plasma etching process. The dielectric layer **127** at bottoms of the through vias **156***v*, on the top surface of the dielectric layer **139** under the openings **154***a*, and on a top surface of the interconnect or metal trace **75***a* over the supporter **803** can be etched away. Accordingly, the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, the top surface of the dielectric layer **139** under of the openings **154***a*, and the interconnect or metal trace **75***a* over the supporter **803** are exposed by the openings **154***a*, and the dielectric layer **127** remains on the sidewalls of the through vias **156***v*, so called as sidewall dielectric layers in the through vias **156***v*. The sidewall dielectric layers **127** are formed on the sidewalls of the through vias **156***v* in the chips **118** or in the dummy substrate(s) **158** and are enclosed by the semiconductor substrates **124** of the chips **118** or by the dummy substrate(s) **158**.

[0264] Next, referring to FIG. **72**, multiple trenches **139***t*, damascene openings, can be formed in the dielectric layer **139** by etching the dielectric layer **139** and the sidewall dielectric layers **127** under the openings **154***a* to a depth D**9**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers, using, e.g., an anisotropic plasma etching process. Preferably, the dielectric layer **139** and the sidewall dielectric layers **127** have a same material, such as silicon nitride, silicon oxide, or silicon oxynitride. After the etching process, the dielectric layer **139** under the trenches **139***t* has a remaining thickness T**20**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0265] Alternatively, an etching-stop technique may be applied to the process of forming the trenches **139***t* in the dielectric layer **139**. In this case, the dielectric layer **139** is composed of the previously described inorganic layers, e.g., including the first silicon-oxide layer on the surfaces **124***s*, **138***s* and **158***s*, the silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and the second silicon-oxide layer on the silicon-oxynitride layer. The trenches **139***t* can be formed in the dielectric layer **139** by etching the second silicon-oxide layer of the dielectric layer **139** under the openings **154***a* and the sidewall dielectric layers **127** under the openings **154***a* until the silicon-oxynitride layer of the dielectric layer **139** is exposed by the openings **154***a*. Accordingly, the trenches **139***t* are formed in the second silicon-oxide layer of the dielectric layer **139**, and the remaining dielectric layer **139**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, under the trenches **139***t* has a thickness T**20**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0266] Next, referring to FIG. **73**, the photoresist layer **154** is removed by using, e.g., an organic chemical. The trenches **139***t* formed in the dielectric layer **139** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The sidewall dielectric layers **127** formed on the sidewalls of the through vias **156***v* (such as the through vias **156***b*, **156***c*, **156***d*, **156***e* and **156***f*) in the chips **118** can prevent transition metals, such as copper, sodium or moisture from penetrating into IC devices of the chips **118**. FIG. **74** is a schematic top perspective view showing the through vias **156***v*, the trenches **139***t* and the sidewall dielectric layers **127** illustrated in FIG. **73** according an embodiment of the present invention, and FIG. **73** is a cross-sectional view cut along the line K-K shown in FIG. **74**.

[0267] Next, referring to FIG. **75**, an adhesion/barrier layer **125***a* having a thickness, e.g., smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, is formed on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on sidewalls and bottoms of the trenches **139***t*, on the dielectric layer **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The adhesion/barrier layer **125***a* can be formed by a physical vapor deposition (PVD) process, such as sputtering

IPR2026-00067
TSMC EX1019 Page 274

process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **125***b* having a thickness, e.g., smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, can be formed on the adhesion/barrier layer **125***a* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a conduction layer **125***c* having a thickness, e.g., between 0.5 and 20 micrometers or between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, can be formed on the seed layer **125***b* by using, e.g., an electroplating process.

[0268] The adhesion/barrier layer **125***a* may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness, e.g., smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **125***b* may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness, e.g., smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers. The conduction layer **125***c* may include or can be an electroplated metal layer of copper, gold, or silver having a thickness, e.g., between 0.5 and 20 micrometers or between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0269] Next, referring to FIG. **76**, by using a grinding or polishing process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, the layers **125***a*, **125***b* and **125***c* outside the trenches **139***t* can be removed, and the dielectric layer **127** on the top surface of the dielectric layer **139** can be removed. Accordingly, the dielectric layer **139** has an exposed top surface **139***s* that can be substantially coplanar with the ground or polished surface **227** of the conduction layer **125***c* in the trenches **139***t*, and the surfaces **139***s* and **227** can be substantially flat. The dielectric layer **139** has a thickness T**21**, between the exposed top surface **139***s* and the surface **124***s* or **158***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers or between 2 and 5 micrometers. The adhesion/barrier layer **125***a* and the seed layer **125***b* are at sidewalls and a bottom of the conduction layer **125***c* in the trenches **139***t*, and the sidewalls and the bottom of the conduction layer **125***c* in the trenches **139***t* are covered by the adhesion/barrier layer **125***a* and the seed layer **125***b*.

[0270] In a first alternative, after the steps of removing the layers **125***a*, **125***b* and **125***c* outside the trenches **139***t* and removing the dielectric layer **127** on the top surface of the dielectric layer **139**, the adhesion/barrier layer **125***a* can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t*, on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewall dielectric layers **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0271] In a second alternative, after the steps of removing the layers **125***a*, **125***b* and **125***c* outside the trenches **139***t* and removing the dielectric layer **127** on the top surface of the dielectric layer **139**, the adhesion/barrier layer **125***a* can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t*, on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewall dielectric layers **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0272] In a third alternative, after the steps of removing the layers **125***a*, **125***b* and **125***c* outside the trenches **139***t* and removing the dielectric layer **127** on the top surface of the dielectric layer **139**, the adhesion/barrier layer **125***a* can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t*, on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewall dielectric layers **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0273] After the steps of removing the layers **125***a*, **125***b* and **125***c* outside the trenches **139***t* and removing the dielectric layer **127** on the top surface of the dielectric layer **139**, the layers **125***a*, **125***b* and **125***c* in the trenches **139***t* compose multiple metal interconnects (or damascene metal traces) **3**, including metal interconnects (or damascene metal traces) **3***a*, **3***b* and **3***c*, in the trenches **139***t*. The layers **125***a*, **125***b* and **125***c* in the through vias **156***v* compose multiple metal plugs (or metal vias) **7***p* in the through vias **156***v*, including metal plugs (or metal vias) **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through

vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f* as shown in FIG. **73**, respectively. Each of the metal plugs **7***p* in the chips **118** and in the dummy substrate(s) **158** is enclosed by one of the sidewall dielectric layers **127** in the through vias **156***v*. The metal plug **7***a* is formed in the dummy substrate **158**, the metal plugs **7***b*, **7***c* and **7***d* are formed in one of the chips **118**, and the metal plugs **7***f* and **7***e* are formed in another one of the chips **118**. The supporter **803** and the interconnect or metal trace **75***a*, in the interconnection layer **17**, on the supporter **803** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **17** is positioned, of the metal plug **7***e*. These metal plugs **7***p* formed in the chips **118** and in the dummy substrate(s) **158** can connect the metal interconnects **3** and the semiconductor devices **13** in the chips **118** and connect the metal interconnects **2** and **3**. The metal interconnects **3**, such as **3***a*, **3***b* and **3***c*, in the trenches **139***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0274] One of the metal plugs **7***p*, such as the metal plug **7***a*, can be formed in the dummy substrate **158** and formed on a contact point, at a bottom of one of the through vias **156***v* (such as the through via **156***a*), of the conduction layer **86** of one of the metal interconnects **2**. Another one of the metal plugs **7***p*, such as the metal plug **7***b*, can be formed in one of the chips **118** and formed on another contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***b*), of the conduction layer **86** in another one of the metal interconnects **2**, such as the metal interconnect **2***a*. Another one of the metal plugs **7***p*, such as the metal plug **7***c*, can be formed in the one of the chips **118** and formed on a contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***c*), of the interconnect or metal trace **75***d* in the one of the chips **118**. Another one of the metal plugs **7***p*, such as the metal plug **7***d*, can be formed in the one of the chips **118** and formed on a contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***d*), of the interconnect or metal trace **75***c* in the one of the chips **118**. Another one of the metal plugs **7***p*, such as the metal plug **7***f*, can be formed in another one of the chips **118** and formed on a contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***f*), of the interconnect or metal trace **75***b* in the another one of the chips **118**. Another one of the metal plugs **7***p*, such as the metal plug **7***e*, can be formed in the another one of the chips **118**, formed on a contact point of the interconnect or metal trace **75***a* over a supporter (such as the supporter **803**) that is between two lower left and right portions of the another one of the metal plugs **7***p* (such as the metal plug **7***e*), and formed on another contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***e*), of the conduction layer **86** in another one of the metal interconnects **2**, such as the metal interconnect **2***b*.

[0275] The metal interconnect **3***a* can be formed over one or more of the chips **118**. The metal interconnect **3***b* can be formed over multiple of the chips **118** and across multiple edges of the multiple of the chips **118**. The metal interconnect **3***c* can be formed over one or more of the chips **118** and over the dummy substrate(s) **158**.

[0276] The metal interconnect **3***a* can be connected to a contact point, at a bottom of the through via **156***b*, of the metal interconnect **2***a* through the metal plug **7***b* in one of the chips **118** and can be connected to a contact point, at a bottom of the through via **156***c*, of the interconnect or metal trace **75***d* in the one of the chips **118** through the metal plug **7***c* in the one of the chips **118**. The metal interconnect **3***b* can be connected to a contact point, at a bottom of the through via **156***d*, of the interconnect or metal trace **75***c* in the one of the chips **118** through the metal plug **7***d* in the one of the chips **118** and can be connected to a contact point, at a bottom of the through via **156***f*, of the interconnect or metal trace **75***b* in another one of the chips **118** through the metal plug **7***f* in the another one of the chips **118**. The metal interconnect **3***c* can be connected to a contact point, at a bottom of the through via **156***e*, of the metal interconnect **2***b* through the metal plug **7***e* in the another one of the chips **118**, can be connected to one or more of the semiconductor devices **13** in the another one of the chips **118** through the metal plug **7***e* and the interconnect or metal trace **75***a* in the another one of the chips **118**, and can be connected to a contact point, at a bottom of the through via **156***a*, of another one of the metal interconnects **1** through the metal plug **7***a* in the dummy substrate **158**. Accordingly, the contact points at the bottoms of the through vias **156***b* and **156***c* can be connected to each other through the metal interconnect **3***a*, the contact points at the bottoms of the through vias **156***d* and **156***f* can be connected to each other through the metal interconnect **3***b*, and the contact points at the bottoms of the through vias **156***a* and **156***e* can be connected to each other through the metal interconnect **3***c*.

[0277] According, one of the semiconductor devices **13** in one of the chips **118** can be connected to another one of the semiconductor devices **13** in the one of the chips **118** or in another one of the chips **118** through one of the metal interconnects **3**, such as **3***a* or **3***b*, and can be connected to a contact point, at a bottom of one of the through vias **156***v* (such as the through via **156***a*, **156***b*, or **156***e*), of the conduction layer **86** of one of the metal interconnects **2**, such as **2***a* or **2***b*, through the one of the metal interconnects **3**. Each of the metal interconnects **3** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0278] Alternatively, the element **118** not only can indicate a chip, but also can indicate a wafer. When the element **118** is a wafer, the element **72** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0279] Referring to FIG. **77**, after forming the structure illustrated in FIG. **76**, an insulating or dielectric layer **122** can be formed on the ground or polished surface **223** of the adhesion/barrier layer **125***a*, on the ground or polished surface **225** of the seed layer **125***b*, on the ground or polished surface **227** of the conduction layer **125***c*, and on the exposed top surface **139***s* of the dielectric layer **139**. Next, a polymer layer **136**, such as photosensitive polymer layer, can be formed on the insulating or dielectric layer **122** by using, e.g., a spin coating process. Next, a photo exposure process and a chemical development process can be employed to form multiple openings **136***a*, exposing multiple regions of the insulating or dielectric layer **122**, in the polymer layer **136**. Next, the polymer layer **136** can be cured in a temperature between 180 degrees centigrade and 300 degrees centigrade or between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers. The polymer layer **136** can be a polyimide layer, a

benzocyclobutene (BCB) layer, a polybenzoxazole (PBO) layer, a poly-phenylene oxide (PPO) layer, an epoxy layer, or a layer of SU-8.

[0280] The insulating or dielectric layer **122** may have a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers. The insulating or dielectric layer **122**, for example, may include or can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC) with a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers, formed by a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. Alternatively, the insulating or dielectric layer **122** may include or can be a polymer layer with a thickness, e.g., between 0.05 and 20 micrometers, and preferably between 0.05 and 5 micrometers, between 0.05 and 3 micrometers, between 0.05 and 1 micrometers, or between 0.05 and 0.5 micrometers, formed by, e.g., a process including a spin coating process and a curing process, and the polymer layer can be a layer of polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or epoxy.

[0281] Next, referring to FIG. **78**, the insulating or dielectric layer **122** under the openings **136***a* in the polymer layer **136** can be removed by an etching process. Accordingly, multiple openings can be formed in the insulating or dielectric layer **122** and under the openings **136***a* and expose multiple contact points, serving as power pads, ground pads, or signal input/output (I/O) pads, of the conduction layer **125***c* of the metal interconnects **3**.

[0282] Next, referring to FIG. **79**, an adhesion/barrier layer **134** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, can be formed on the polymer layer **136** and on the contact points, exposed by the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **132** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, can be formed on the adhesion/barrier layer **134** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a photoresist layer **152**, such as positive-type photoresist layer or negative-type photoresist layer, having a thickness, e.g., between 20 and 200 micrometers, between 20 and 150 micrometers, between 20 and 130 micrometers, between 20 and 100 micrometers or between 20 and 50 micrometers can be formed on the seed layer **132** by, e.g., a spin-on coating process or a lamination process. Next, the photoresist layer **152** is patterned with the processes of photo exposure and chemical development to form multiple openings **152***a*, exposing multiple regions of the seed layer **132**, in the photoresist layer **152**. A 1X stepper or 1X contact aligner can be used to expose the photoresist layer **152** during the process of photo exposure.

[0283] The adhesion/barrier layer **134** may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **132** may include or can be a layer of copper, a titanium-copper alloy, nickel, gold or silver having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers.

[0284] For example, when the adhesion/barrier layer **134** is formed by a suitable process or processes, e.g., by sputtering a titanium-containing layer, such as a single layer of titanium, a titanium-tungsten alloy or titanium nitride, having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the polymer layer **136** and on the contact points, exposed by the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**, the seed layer **132** can be formed by a suitable process or processes, e.g., by sputtering a layer of copper, a titanium-copper alloy, nickel, gold or silver with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer.

[0285] Alternatively, when the adhesion/barrier layer **134** is formed by a suitable process or processes, e.g., by sputtering a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the polymer layer **136** and on the contact points, exposed by the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**, the seed layer **132** can be formed by a suitable process or processes, e.g., by sputtering a layer of copper, a titanium-copper alloy, nickel, gold or silver with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer.

[0286] Next, referring to FIG. **80**, a conduction layer **130** having a thickness greater than 1 micrometer, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 20 micrometers or between 1 and 10 micrometers, can be formed in the openings **152***a* and on the regions, exposed by the openings **152***a*, of the seed layer **132** by using, e.g., an electroplating process. Next, a barrier layer **128** having a thickness, e.g., between 0.5 and 10 micrometers, between 0.5 and 5 micrometers or between 0.5 and 3 micrometers can be formed in the openings **152***a* and on the conduction layer **130** by using, e.g., an electroplating process or an electroless plating process. Next, a solder wetting layer, such as gold layer, can be optionally formed in the openings **152***a* and on the barrier layer **128** by using, e.g., an electroplating process or an electroless plating process. Next, a solder layer **126** having a thickness, e.g., greater than 5 micrometers can be formed in the openings **152***a* and on the barrier layer **128** or solder wetting layer by using, e.g., an electroplating process.

[0287] The conduction layer **130** can be a metal layer that may include or can be a layer of copper, gold or silver with a thickness greater than 1 micrometer, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 20 micrometers or between 1 and 10 micrometers, formed by an electroplating process. The barrier layer **128** can be a metal layer that may include or can be a layer of nickel, nickel vanadium or a nickel alloy with a thickness, e.g., between 0.5 and 10 micrometers, between 0.5 and 5 micrometers or between 0.5 and 3 micrometers formed by an electroplating process. The solder layer **126** can be a bismuth-containing layer, an indium-containing layer or a tin-containing layer of a tin-lead alloy, a tin-silver alloy, a tin-silver-copper alloy or a tin-gold alloy with a thickness greater than 5 micrometers.

[0288] Referring to FIG. **81**, after forming the solder layer **126** illustrated in FIG. **80**, the photoresist layer **152** is removed using, e.g., an organic chemical solution. Next, the seed layer **132** not under the conduction layer **130** is removed by using, e.g., a wet chemical etching process or dry plasma etching process. Next, the adhesion/barrier layer **134** not under the conduction layer **130** is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Next, the solder layer **126** can be formed with multiple solid solder bumps or balls **126** on the barrier layer **128** or on the solder wetting layer by, e.g., a flux coating process, a re-flow process and a flux cleaning process, subsequently. The solder bumps or balls **126** are used for external connection.

[0289] Accordingly, the layers **128**, **130**, **132** and **134** compose an under bump metallurgic (UBM) layer **666** on the polymer layer **136** and on the contact points, at bottoms of the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**, and the solder bumps or balls **126** can be formed on the UBM layer **666**. Alternatively, the UBM layer **666** may further include the solder wetting layer illustrated in FIG. **80** on the barrier layer **128**, and the solder bumps or balls **126** can be formed on the solder wetting layer of the UBM layer **666**.

[0290] The solder bumps or balls **126** may have a bump height, e.g., greater than 5 micrometers, such as between 5 and 200 micrometers, and preferably between 10 and 100 micrometers or between 10 and 30 micrometers, and a width or diameter, e.g., between 10 and 200 micrometers, and preferably between 50 and 100 micrometers or between 10 and 30 micrometers. The solder bumps or balls **126** may include bismuth, indium, tin, a tin-lead alloy, a tin-silver alloy, a tin-silver-copper alloy, or a tin-gold alloy. Each of the interconnects **3**, such as the interconnect **3***a*, **3***b* or **3***c* as shown in FIG. **76**, can be connected to one or more of the solder bumps or balls **126** through the UBM layer **666**.

[0291] Next, referring to FIG. **82**, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555** and **555***a*.

[0292] Alternatively, before the singulation process, multiple metal plugs or vias can be formed in multiple openings in the substrate **10** and the dielectric layer **12** of the carrier **11**, passing through the substrate **10** and the dielectric layer **12**, and connected to the conductive layer **18** of the carrier **11**. The metal plugs or vias may include or can be copper, aluminum, gold, or nickel. Alternatively, the metal plugs or vias may further include titanium, a titanium-tungsten alloy, titanium nitride, tantalum, tantalum nitride, a titanium-copper alloy, or chromium. Next, multiple metal traces can be formed at a bottom side of the substrate **10** and connected to the conductive layer **18** of the carrier **11** through the metal plugs or vias. Each of the metal traces may include a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, or a titanium-copper alloy under the bottom side of the substrate **10**, and an electroplated metal layer under the layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, or a titanium-copper alloy. The electroplated metal layer may include or can be a layer of copper, gold, aluminum, or nickel. Next, multiple passive components, such as capacitors, inductors or resistors, can be attached to the bottom side of the substrate **10** and boned with the metal traces using solders. The solders may include bismuth, indium, tin, a tin-lead alloy, a tin-silver alloy, a tin-silver-copper alloy, a tin-gold alloy, or a tin-copper alloy. After the passive components are boned with the metal traces, the singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as the system-in packages or multichip modules **555** and **555***a*.

[0293] Accordingly, the system-in package or multichip module **555** can have one of the passive components that has a first terminal connected to the metal plug **5***a* or **5***b* as shown in FIG. **26** through, in sequence, one of the solders, one of the metal traces at the bottom side of the substrate **10**, one of the metal plugs or vias in the substrate **10**, and a metal interconnect of the conductive layer **18** at the top side of the substrate **10**, and has a second terminal connected to the metal plug **5***e* as shown in FIG. **26** through, in sequence, another one of the solders, another one of the metal traces at the bottom side of the substrate **10**, another one of the metal plugs or vias in the substrate **10**, and another metal interconnect of the conductive layer **18** at the top side of the substrate **10**.

[0294] The system-in package or multichip module **555** can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **83**, the system-in package or multichip module **555** can be bonded with a top side of a carrier **176** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, an under fill **174** can be formed between the polymer layer **136** of the system-in package or multichip module **555** and the top side of the carrier **176** and encloses the solder bumps or balls **126**. The under fill **174** may include epoxy, glass filler or carbon filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, multiple solder balls **178** can be formed on a bottom side of the carrier **176**. Each of the solder balls **178** can be a ball of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a diameter between 0.25 and 1.2 millimeters. The carrier **176** may have a thickness, e.g., between 0.1 and 2 millimeters and can be a ball-grid-array (BGA) substrate or a print circuit board (PCB). The carrier **176** may include a core containing BT, FR4, epoxy and glass fiber, and multiple metal layers at both sides of the core.

[0295] FIG. **84** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After the steps illustrated in FIG. **79**, a metal layer **142**, such as a layer of copper, gold or silver, having a thickness, e.g., between 10 and 100 micrometers, and preferably between 20 and 60 micrometers, can be formed on the regions, exposed by the openings **152***a* in the photoresist layer **152**, of the seed layer **132** and in the openings **152***a* by using, e.g., an electroplating process. Next, a barrier layer **144**, such as a layer of nickel or a nickel-vanadium alloy, having a thickness, e.g., between 0.2 and 10 micrometers, and preferably between 1 and 5 micrometers, can be formed in the openings **152***a* and on the metal layer **142** by using, e.g., an electroplating process or an electroless plating process. Next, a solder wetting layer **146**, such as a layer of gold, silver, copper or tin, having a thickness, e.g., between 0.02 and 5 micrometers, and preferably between 0.1 and 1 micrometers, can be formed in the openings **152***a* and on the barrier layer **144** by using, e.g., an electroplating process or an electroless plating process. Next, the photoresist layer **152** is removed using, e.g., an organic chemical solution. Next, the seed layer **132** not under the metal layer **142** is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Next, the adhesion/barrier layer **134** not under the metal layer **142** is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Accordingly, the layers **132**, **134**, **142**, **144** and **146** compose multiple metal bumps **668** on the polymer layer **136** and on the contact points, at the bottoms of the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**. The metal bumps **668** may have a width, e.g., between 20 and 400 micrometers, and preferably between 50 and 100 micrometers, and a height, e.g., between 10 and 100 micrometers, and preferably between 20 and 60 micrometers. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **555***b* as shown in FIG. **84**. In the system-in package or multichip module **555***b*, each of the interconnects **3**, such as the interconnect **3***a*, **3***b* or **3***c* as shown in FIG. **76**, can be connected to one or more of the metal bumps **668**, and the metal bumps **668** can be used for external connection.

[0296] The system-in package or multichip module **555***b* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **85**, the system-in package or multichip module **555***b* can be bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Alternatively, the metal joints **180** can be a gold layer having a thickness between 0.1 and 10 micrometers. Next, the under fill **174** illustrated in FIG. **83** can be formed between the polymer layer **136** of the system-in package or multichip module **555***b* and the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**.

[0297] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **77-85** can be omitted. In this case, the polymer layer **136** is formed on the surfaces **223**, **225**, **227** and **139***s*, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0298] FIGS. **86** and **87** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **86**, after forming the structure illustrated in FIG. **76**, the insulating or dielectric layer **122** illustrated in FIG. **77** can be formed on the ground or polished surfaces of the layers **125***a* and **125***b*, on the ground or polished surface **227** of the conduction layer **125***c*, and on the exposed top surface **139***s* of the dielectric layer **139**. Next, multiple openings **122***a* are formed in the insulating or dielectric layer **122** using, e.g., a photolithography process and a dielectric etching process and expose multiple regions of the conduction layer **125***c* of the metal interconnects **3**. Next, multiple metal interconnects or traces **300** can be formed on the insulating or dielectric layer **122** and on the regions, exposed by the openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**. Next, a polymer layer **136**, such as photosensitive polymer layer, can be formed on the insulating or dielectric layer **122** and on the metal interconnects or traces **300** by using, e.g., a spin coating process. Next, a photo exposure process and a chemical development process can be employed to form multiple openings **136***a*, exposing multiple contact points of the metal interconnects or traces **300**, in the polymer layer **136**. Next, the polymer layer **136** can be cured in a temperature between 180 degrees centigrade and 300 degrees centigrade or between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers. The polymer layer **136** can be a polyimide layer, a benzocyclobutene (BCB) layer, a polybenzoxazole (PBO) layer, a poly-phenylene oxide (PPO) layer, an epoxy layer, or a layer of SU-8.

[0299] Each of the metal interconnects or traces **300** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace. In a first alternative, the metal interconnects or traces **300** can be formed by the following steps. First, a metal layer **148** can be formed on the insulating or dielectric layer **122** and on the regions, exposed by the openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3** by sputtering an adhesion/barrier layer with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, on the insulating or dielectric layer **122** and on the regions, exposed by the openings **122***a* in the layer **122**, of the layer **125***c* of the metal interconnects **3**, and then sputtering a seed layer with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8

micrometers, on the adhesion/barrier layer. The adhesion/barrier layer may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers. The seed layer may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers. Next, a patterned photoresist layer can be formed on the seed layer of the metal layer **148**, and multiple openings in the patterned photoresist layer expose multiple regions of the seed layer. Next, a conduction layer **150** can be formed on the regions, exposed by the openings in the patterned photoresist layer, of the seed layer of the metal layer **148** by using an electroplating process. The conduction layer **150**, for example, can be a gold layer, used for bonding with gold, copper, or aluminum wirebonded wires in the following process, with a thickness between 0.5 and 5 micrometers formed on the seed layer, preferably the previously described gold seed layer, of the metal layer **148** by an electroplating process. Alternatively, the conduction layer **150** can be a copper layer, used for bonding with gold, copper, or aluminum wirebonded wires in the following process, with a thickness between 2 and 10 micrometers formed on the seed layer, preferably the previously described copper or titanium-copper-alloy seed layer, of the metal layer **148** by an electroplating process. Alternatively, the conduction layer **150** may include a nickel layer having a thickness between 1 and 10 micrometers formed on or over the seed layer, preferably the previously described copper or titanium-copper-alloy seed layer, of the metal layer **148** by an electroplating process or an electroless plating process, and a gold layer, used for bonding with gold, copper, or aluminum wirebonded wires in the following process, having a thickness between 0.01 and 2 micrometers formed on the nickel layer by an electroplating process or an electroless plating process. Next, the patterned photoresist layer can be removed. Next, the metal layer **148** not under the conduction layer **150** can be removed by an etching process. Accordingly, the metal interconnects or traces **300** can be composed of the metal layer **148** and the conduction layer **150**, and sidewalls of the conduction layer **150** are not covered by the metal layer **148**.

[0300] In a second alternative, the metal interconnects or traces **300** can be formed by the following steps. First, an adhesion/barrier layer **148** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, can be formed on the insulating or dielectric layer **122** and on the regions, exposed by the openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3** by a sputtering process. The adhesion/barrier layer **148** can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers. Next, a wirebondable conduction layer **150** having a thickness between 0.5 and 5 micrometers can be formed on the adhesion/barrier layer **148** by a sputtering process. The wirebondable conduction layer **150** can be a layer of an aluminum-copper alloy, used for bonding with gold, copper, or aluminum wirebonded wires in the following process, having a thickness between 0.5 and 5 micrometers formed by a sputtering process. Next, a patterned photoresist layer can be formed on the wirebondable conduction layer **150**. Next, by using an etching process, the wirebondable conduction layer **150** not under the patterned photoresist layer and the adhesion/barrier layer **148** not under the patterned photoresist layer can be removed. Next, the patterned photoresist layer can be removed. Accordingly, the metal interconnects or traces **300** can be composed of the adhesion/barrier layer **148** and the wirebondable conduction layer **150**, and sidewalls of the wirebondable conduction layer **150** are not covered by the adhesion/barrier layer **148**.

[0301] Next, referring to FIG. **87**, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555***c* and **555***d*.

[0302] FIG. **88** shows a multichip package **566** including the system-in package or multichip module **555***c* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**, which can be formed by, e.g., the following steps. First, a plurality of the system-in package or multichip module **555***c* can be joined with the carrier **176** shown in FIG. **83** by, e.g., forming a glue layer **182** with a thickness between 20 and 150 micrometers on the top side of the carrier **176**, and then attaching the plurality of the system-in package or multichip module **555***c* to the top side of the carrier **11** using the glue layer **182**. The glue layer **182** can be a polymer layer, such as a layer of epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), silosane, or SU-8, with a thickness, e.g., between 20 and 150 micrometers. Next, multiple wires **184**, such as gold wires, copper wires, or aluminum wires, can be wirebonded onto the top side of the carrier **176** and onto the contact points, exposed by the openings **136***a* in the polymer layer **136**, of the conduction layer **150** of the metal interconnects or traces **300** by a wirebonding process. Accordingly, the metal interconnects or traces **300** of the plurality of the system-in package or multichip module **555***c* can be physically and electrically connected to the carrier **176** through the wirebonded wires **184**. Next, a molding compound **186** can be formed on the plurality of the system-in package or multichip module **555***c*, on the top side of the carrier **176** and on the wirebonded wires **184**, encapsulating the wirebonded wires **184** and the plurality of the system-in package or multichip module **555***c*, by a molding process. The molding compound **186** may include epoxy, carbon filler or glass filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**. Thereafter, a singulation process can be performed to cut the carrier **176** and the molding compound **186** and to singularize a plurality of the multichip package **566**. The multichip package **566** can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**.

[0303] FIGS. **89-103** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **89**, after forming the structure illustrated in FIG. **19**, by using an etching process (such as anisotropic etching process), the dielectric layer **50** formed on the layers **18**, **26** and **34** and on the top surface of the dielectric layer **60** can be etched away, and a top portion of the dielectric layer **60** can be further etched away. After the etching process, the dielectric layer **60**

may have a remaining thickness T**22** between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.05 and 2 micrometers, between 0.05 and 1 micrometers, between 0.05 and 0.5 micrometers, or between 0.05 and 0.3 micrometers.

[0304] Alternatively, an etching-stop technique may be applied to the process of etching away the top portion of the dielectric layer **60**. In this case, the dielectric layer **60** is composed of the previously described inorganic layers, e.g., including the first silicon-oxide layer on the surfaces **58***s*, **62***s* and **64***s*, the silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and the second silicon-oxide layer on the silicon-oxynitride layer. During the etching process, the top portion of the dielectric layer **60**, that is, the second silicon-oxide layer, can be etched away until the etch stop layer, that is, the silicon-oxynitride layer, is exposed and all of the second silicon-oxide layer is removed. The remaining dielectric layer **60**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, may have a thickness T**22** between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.05 and 2 micrometers, between 0.05 and 1 micrometers, between 0.05 and 0.5 micrometers, or between 0.05 and 0.3 micrometers.

[0305] Accordingly, the dielectric layer **50** at bottoms of the through vias **170***v*, on the top surface of the dielectric layer **60** and on a top surface of the interconnect or metal trace **35***a* on the supporter **801** can be etched away, and the dielectric layer **50** remains on the sidewalls of the through vias **170***v*, so called as sidewall dielectric layers in the through vias **170***v*. The sidewall dielectric layers **50** are formed on the sidewalls of the through vias **170***v* in the chips **68** or in the dummy substrate(s) **62** and are enclosed by the semiconductor substrates **58** of the chips **68** or by the dummy substrate(s) **62**.

[0306] Next, referring to FIG. **90**, an adhesion/barrier layer **52** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, can be formed on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on the etched surface of the dielectric layer **60**, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The adhesion/barrier layer **52** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **54** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, can be formed on the adhesion/barrier layer **52** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a photoresist layer **194** can be formed on the seed layer **54** by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **194***a*, exposing multiple regions of the seed layer **54**, in the photoresist layer **194**. The patterned photoresist layer **194** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, a conduction layer **56** having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, can be formed on the regions, exposed by the openings **194***a* in the layer **194**, of the seed layer **54** by using, e.g., an electroplating process.

[0307] The adhesion/barrier layer **52** may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **54** may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers. The conduction layer **56** may include or can be an electroplated metal layer of copper, gold, or silver having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers.

[0308] For example, the adhesion/barrier layer **52** can be a titanium-containing layer, such as a single layer of titanium-tungsten alloy, titanium, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on the etched surface of the dielectric layer **60**, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer. The conduction layer **56** can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, on the single layer of copper or a titanium-copper alloy.

[0309] Alternatively, the adhesion/barrier layer **52** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on the etched surface of the dielectric layer **60**, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer. The conduction layer **56** can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, on the single layer of copper or a titanium-copper alloy.

[0310] Alternatively, the adhesion/barrier layer **52** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on the etched surface of the dielectric layer **60**, on the sidewall dielectric layers **50**, and on

the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer. The conduction layer **56** can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, on the single layer of copper or a titanium-copper alloy.

[0311] Next, referring to FIG. **91**, the photoresist layer **194** is removed using, e.g., an organic chemical solution. Next, the seed layer **54** not under the conduction layer **56** is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Next, the adhesion/barrier layer **52** not under the conduction layer **56** is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Accordingly, the layers **52**, **54** and **56** over the dielectric layer **60** and over the through vias **170***v* compose multiple metal interconnects **1**, including metal interconnects **1***a* and **1***b*, over the dielectric layer **60** and over the through vias **170***v*. The adhesion/barrier layer **52** and the seed layer **54** of the metal interconnects **1** over the dielectric layer **60** are not at any sidewall **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**, but under a bottom of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**. The sidewalls **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60** are not covered by the layers **52** and **54**. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f* as shown in FIG. **89**, respectively. Each of the metal plugs **5***p* in the chips **68** and in the dummy substrate(s) **62** is enclosed by one of the sidewall dielectric layers **50** in the through vias **170***v*. The metal plug **5***a* is formed in the dummy substrate **62**, and the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* are formed in the same chip **68**. The supporter **801** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **801** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***e*. These metal plugs **5***p* formed in the chips **68** and in the dummy substrate(s) **62** can connect the metal interconnects **1** and the semiconductor devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**.

[0312] For example, one of the metal plugs **5***p*, such as the metal plug **5***a*, can be formed in the dummy substrate **62** and formed on a first contact point of the conductive layer **18** at a bottom of one of the through vias **170***v*, such as the through via **170***a*. Another one of the metal plugs **5***p*, such as the metal plug **5***b*, can be formed in one of the chips **68** and formed on a second contact point of the conductive layer **18** at a bottom of another one of the through vias **170***v*, such as the through via **170***b*. Another one of the metal plugs **5***p*, such as the metal plug **5***c*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***c*), of the interconnect or metal trace **35***d* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***d*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***d*), of the interconnect or metal trace **35***c* in the patterned metal layer **26** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***f*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***f*), of the interconnect or metal trace **35***b* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***e*, can be formed in one of the chips **68**, formed on a contact point of the interconnect or metal trace **35***a* over a supporter (such as the supporter **801**) that is between two lower left and right portions of the another one of the metal plugs **5***p* (such as the metal plug **5***e*), and formed on a third contact point of the conductive layer **18** at a bottom of one of the through vias **170***v* (such as the through via **170***e*). The previously described first, second and third contact points of the conductive layer **18** can be separated from one another by the dielectric or insulating layer **20** of the carrier **11**.

[0313] One of the metal interconnects **1**, such as **1***a* or **1***b*, can be formed over the dummy substrate(s) **62**, over multiple of the chips **68**, and across multiple edges of the multiple of the chips **68**. The metal interconnect **1***a* can be connected to the previously described first contact point of the conductive layer **18** at the bottom of the through via **170***a* through the metal plug **5***a* in the dummy substrate **62**, can be connected to the previously described second contact point of the conductive layer **18** at the bottom of the through via **170***b* through the metal plug **5***b* in one of the chips **68**, can be connected to the contact point, at the bottom of the through via **170***c*, of the interconnect or metal trace **35***d* in the one of the chips **68** through the metal plug **5***c* in the one of the chips **68**, and can be connected to the contact point, at the bottom of the through via **170***d*, of the interconnect or metal trace **35***c* in the one of the chips **68** through the metal plug **5***d* in the one of the chips **68**. The metal interconnect **1***b* can be connected to the contact point, at the bottom of the through via **170***f*, of the interconnect or metal trace **35***b* in the one of the chips **68** through the metal plug **5***f* in the one of the chips **68**, can be connected to the previously described third contact point of the conductive layer **18** at the bottom of the through via **170***e* through the metal plug **5***e* in the one of the chips **68**, and can be connected to the interconnect or metal trace **35***a* on the supporter **801** through the metal plug **5***e* in the one of the chips **68**. The metal interconnect **1***a* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**. The metal interconnect **1***b* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**.

[0314] Accordingly, one of the semiconductor devices **36** in one of the chips **68** can be connected to another one of the semiconductor devices **36** in the one of the chips **68** or in another one of the chips **68** through one of the metal interconnects **1**, such as **1***a* or **1***b*, and can be connected to a contact point, at a bottom of one of the through vias **170***v* (such as the through via **170***a*, **170***b* or **170***e*), of the conductive layer **18** in the carrier **11** through the one of the metal interconnects **1**. Each of the metal interconnects **1** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0315] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0316] Next, referring to FIG. **92**, an insulating or dielectric layer **66** having a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers, can be formed on the conduction layer **56** of the metal interconnects **1**, on the etched surface of the dielectric layer **60**, and in gaps between the metal interconnects **1**.

[0317] The insulating or dielectric layer **66**, for example, may include or can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), on the conduction layer **56** of the metal interconnects **1**, on the etched surface of the dielectric layer **60**, and in the gaps between the metal interconnects **1**. The polymer layer on the conduction layer **56** may have a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers.

[0318] Alternatively, the insulating or dielectric layer **66** may include or can be an inorganic layer, such as a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC), on the conduction layer **56** of the metal interconnects **1**, on the etched surface of the dielectric layer **60**, and in the gaps between the metal interconnects **1**. The inorganic layer on the conduction layer **56** may have a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers.

[0319] Alternatively, referring to FIG. **93**, the insulating or dielectric layer **66** as shown in FIG. **92** can be formed by the following steps. First, a polymer layer **66***a*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), is formed on the conduction layer **56** of the metal interconnects **1**, on the etched surface of the dielectric layer **60**, and in the gaps between the metal interconnects **1**. Next, the polymer layer **66***a* is ground or polished by, e.g., a mechanical grinding process, a mechanical polishing process, a chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching until the conduction layer **56** of the metal interconnects **1** has a top surface **56***u* not covered by the polymer layer **66***a*. Accordingly, the polymer layer **66***a* remains on the etched surface of the dielectric layer **60** and in the gaps between the metal interconnects **1** and has a thickness, e.g., greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers. The ground or polished surface **66***s* of the polymer layer **66***a* can be substantially flat and substantially coplanar with the top surface **56***u* of the conduction layer **56**. Next, an inorganic layer **66***b*, such as a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide, having a thickness, e.g., between 0.1 and 3 micrometers, and preferably between 0.2 and 1.5 micrometers, is formed on the top surface **56***u* of the conduction layer **56** and on the ground or polished surface **66***s* of the polymer layer **66***a*. Accordingly, the insulating or dielectric layer **66** as shown in FIG. **92** also can be provided with the polymer layer **66***a* and the inorganic layer **66***b* as shown in FIG. **93**.

[0320] Referring to FIG. **94**, after forming the insulating or dielectric layer **66**, the following steps can be subsequently performed as illustrated in FIGS. **28-45** to place the chips **72** and the dummy substrate(s) **165** over the layer **116** formed on the layer **66**, to form the encapsulation/gap filling material **98** on the backside of the semiconductor substrate **96** of each chip **72**, on the dummy substrate(s) **165**, and in the gaps **4***a* and **8***a*, to grind or polish the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165**, to form the dielectric layer **88** on the ground or polished surfaces **96***s*, **165***s* and **98***s*, to form the through vias **164***v* in the chips **72** and in the dummy substrate(s) **165**, and to form the dielectric layer **90** on the top surface of the dielectric layer **88**, on the layers **56**, **106** and **114** exposed by the through vias **164***v*, and on the sidewalls of the through vias **164***v*. Next, by using an etching process (such as anisotropic etching process), the dielectric layer **90** formed on the layers **56**, **106** and **114** and on the top surface of the dielectric layer **88** is etched away, and a top portion of the dielectric layer **88** is further etched away. After the etching process, the dielectric layer **88** may have a remaining thickness T**23** between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.05 and 2 micrometers, between 0.05 and 1 micrometers, between 0.05 and 0.5 micrometers, or between 0.05 and 0.3 micrometers.

[0321] Alternatively, an etching-stop technique may be applied to the process of etching away the top portion of the dielectric layer **88**. In this case, the dielectric layer **88** is composed of the previously described inorganic layers, e.g., including the first silicon-oxide layer on the surfaces **96***s*, **98***s* and **165***s*, the silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and the second silicon-oxide layer on the silicon-oxynitride layer. During the etching process, the top portion of the dielectric layer **88**, that is, the second silicon-oxide layer, can be etched away until the etch stop layer, that is, the silicon-oxynitride layer, is exposed and all of the second silicon-oxide layer is removed. The remaining dielectric layer **88**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, may have a thickness T**23** between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.05 and 2 micrometers, between 0.05 and 1 micrometers, between 0.05 and 0.5 micrometers, or between 0.05 and 0.3 micrometers.

[0322] Accordingly, the dielectric layer **90** at bottoms of the through vias **164***v*, on the top surface of the dielectric layer **88** and on a top surface of the interconnect or metal trace **55***a* on the supporter **802** is etched away, and the dielectric layer **90** remains on the sidewalls of the through vias **164***v*, so called as sidewall dielectric layers in the through vias **164***v*. The sidewall dielectric layers **90** are formed on the sidewalls of the through vias **164***v* in the chips **72** or in the dummy substrate(s) **165** and are enclosed by the semiconductor substrates **96** of the chips **72** or by the dummy substrate(s) **165**.

[0323] Next, referring to FIG. **95**, an adhesion/barrier layer **92** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, can be formed on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on the etched surface of the dielectric layer **88**, on the sidewall dielectric layers **90**, and on the interconnect or metal trace **55***a*

IPR2026-00067
TSMC EX1019 Page 283

that is on the supporter **802**. The adhesion/barrier layer **92** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **94** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, can be formed on the adhesion/barrier layer **92** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a photoresist layer **294** can be formed on the seed layer **94** by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **294***a*, exposing multiple regions of the seed layer **94**, in the photoresist layer **294**. The patterned photoresist layer **294** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, a conduction layer **86** having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, can be formed on the regions, exposed by the openings **294***a* in the layer **294**, of the seed layer **94** by using a suitable process, such as electroplating process.

[0324] The adhesion/barrier layer **92** may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **94** may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers. The conduction layer **86** may include or can be an electroplated metal layer of copper, gold, or silver having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers.

[0325] For example, the adhesion/barrier layer **92** can be a titanium-containing layer, such as a single layer of titanium-tungsten alloy, titanium, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on the etched surface of the dielectric layer **88**, on the sidewall dielectric layers **90**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer. The conduction layer **86** can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, on the single layer of copper or a titanium-copper alloy.

[0326] Alternatively, the adhesion/barrier layer **92** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on the etched surface of the dielectric layer **88**, on the sidewall dielectric layers **90**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer. The conduction layer **86** can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, on the single layer of copper or a titanium-copper alloy.

[0327] Alternatively, the adhesion/barrier layer **92** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on the etched surface of the dielectric layer **88**, on the sidewall dielectric layers **90**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer. The conduction layer **86** can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, on the single layer of copper or a titanium-copper alloy.

[0328] Next, referring to FIG. **96**, the photoresist layer **294** is removed using, e.g., an organic chemical solution. Next, the seed layer **94** not under the conduction layer **86** is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Next, the adhesion/barrier layer **92** not under the conduction layer **86** is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Accordingly, the layers **92**, **94** and **86** over the dielectric layer **88** and over the through vias **164***v* compose multiple metal interconnects **2**, including two metal interconnects **2***a* and **2***b*, over the dielectric layer **88** and over the through vias **164***v*. The adhesion/barrier layer **92** and the seed layer **94** of the metal interconnects **2** over the dielectric layer **88** are not at any sidewall **2***w* of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88**, but under a bottom of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88**. The sidewalls **2***w* of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88** are not covered by the layers **92** and **94**. The layers **92**, **94** and **86** in the through vias **164***v* compose multiple metal plugs (or metal vias) **6***p* in the through vias **164***v*, including metal plugs (or metal vias) **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e* as shown in FIG. **94**, respectively. Each of the metal plugs **6***p* in the chips **72** and in the dummy substrate(s) **165** is enclosed by one of the sidewall dielectric layers **90** in the through vias **164***v*. The metal plug **6***a* is formed in the dummy substrate **165**, the metal plugs **6***b* and **6***c* are formed in one of the chips **72**, and

the metal plugs **6***d* and **6***e* are formed in another one of the chips **72**. The supporter **802** and the interconnect or metal trace **55***a*, in the interconnection layer **106**, on the supporter **802** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **106** is positioned, of the metal plug **6***e*. These metal plugs **6***p* formed in the chips **72** and in the dummy substrate(s) **165** can connect the metal interconnects **2** and the semiconductor devices **102** in the chips **72** and connect the metal interconnects **1** and **2**.

[0329] For example, one of the metal plugs **6***p*, such as the metal plug **6***a*, can be formed in the dummy substrate **165** and formed on a contact point, at a bottom of one of the through vias **164***v* (such as the through via **164***a*), of the conduction layer **56** of one of the metal interconnects **1**, such as the metal interconnect **1***b*. Another one of the metal plugs **6***p*, such as the metal plug **6***e*, can be formed in one of the chips **72**, formed on a contact point of the interconnect or metal trace **55***a* over a supporter (such as the supporter **802**) that is between two lower left and right portions of the another one of the metal plugs **6***p* (such as the metal plug **6***e*), and formed on another contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***e*), of the conduction layer **56** in the one of the metal interconnects **1**, such as the metal interconnect **1***b*. Another one of the metal plugs **6***p*, such as the metal plug **6***d*, can be formed in the one of the chips **72** and formed on a contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***d*), of the interconnect or metal trace **55***b* in the one of the chips **72**. Another one of the metal plugs **6***p*, such as the metal plug **6***b*, can be formed in another one of the chips **72** and formed on another contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***b*), of the conduction layer **56** in another one of the metal interconnects **1**, such as the metal interconnect **1***a*. Another one of the metal plugs **6***p*, such as the metal plug **6***c*, can be formed in the another one of the chips **72** and formed on a contact point, at a bottom of another one of the through vias **164***v* (such as the through via **164***c*), of the interconnect or metal trace **55***c* in the another one of the chips **72**.

[0330] The metal interconnect **2***a* can be formed over the dummy substrate(s) **165**, over multiple of the chips **72**, and across multiple edges of the multiple of the chips **72**. The metal interconnect **2***a* can be connected to a contact point, at a bottom of the through via **164***b*, of the metal interconnect **1***a* through the metal plug **6***b* in one of the chips **72**, can be connected to a contact point, at a bottom of the through via **164***c*, of the interconnect or metal trace **55***c* in the one of the chips **72** through the metal plug **6***c* in the one of the chips **72**, and can be connected to a contact point, at a bottom of the through via **164***d*, of the interconnect or metal trace **55***b* in another one of the chips **72** through the metal plug **6***d* in the another one of the chips **72**. These contact points at the bottoms of the through vias **164***b*, **164***c* and **164***d* can be connected to each other through the metal interconnect **2***a*.

[0331] The metal interconnect **2***b* can be formed over multiple of the chips **72** to connect multiple of the semiconductor devices **102** in the multiple of the chips **72**. The metal interconnect **2***b* can be connected to a contact point, at a bottom of the through via **164***e*, of the metal interconnect **1***b* through the metal plug **6***e* in one of the chips **72**, can be connected to one or more of the semiconductor devices **102** in the one of the chips **72** through the metal plug **6***e* and the interconnect or metal trace **55***a* in the one of the chips **72**, and can be connected to a contact point, at a bottom of another one of the through vias **164***v*, of the interconnect or metal trace **55***a*, **55***b* or **55***c* in another one of the chips **72** through another one of the metal plugs **6***p* in the another one of the chips **72**.

[0332] Accordingly, one of the semiconductor devices **102** in one of the chips **72** can be connected to another one of the semiconductor devices **102** in the one of the chips **72** or in another one of the chips **72** through one of the metal interconnects **2**, such as **2***a* or **2***b*, and can be connected to a contact point, at a bottom of one of the through vias **164***v* (such as the through via **164***a*, **164***b*, or **164***e*), of the conduction layer **56** of one of the metal interconnects **1**, such as **1***a* or **1***b*, through the one of the metal interconnects **2**. Each of the metal interconnects **2** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0333] Alternatively, the element **72** not only can indicate a chip, but also can indicate a wafer. When the element **72** is a wafer, the element **68** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0334] Next, referring to FIG. **97**, an insulating or dielectric layer **120** having a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers, is formed on the conduction layer **86** of the metal interconnects **2**, on the etched surface of the dielectric layer **88**, and in gaps between the metal interconnects **2**.

[0335] The insulating or dielectric layer **120**, for example, may include or can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), on the conduction layer **86** of the metal interconnects **2**, on the etched surface of the dielectric layer **88**, and in the gaps between the metal interconnects **2**. The polymer layer on the conduction layer **86** may have a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers.

[0336] Alternatively, the insulating or dielectric layer **120** may include or can be an inorganic layer, such as a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC), on the conduction layer **86** of the metal interconnects **2**, on the etched surface of the dielectric layer **88**, and in the gaps between the metal interconnects **2**. The inorganic layer on the conduction layer **86** may have a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers.

[0337] Alternatively, referring to FIG. **98**, the insulating or dielectric layer **120** as shown in FIG. **97** can be formed by the following steps. First, a polymer layer **120***a*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), is formed on the conduction layer **86** of the metal interconnects **2**, on the etched surface of the dielectric layer **88**, and in the gaps between the metal interconnects **2**. Next, the polymer layer **120***a* is ground or polished by, e.g., a mechanical grinding process, a mechanical polishing process, a chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching until the conduc-

tion layer **86** of the metal interconnects **2** has a top surface **86***u* not covered by the polymer layer **120***a*. Accordingly, the polymer layer **120***a* remains on the dielectric layer **88** and in the gaps between the metal interconnects **2** and has a thickness, e.g., greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers. The ground or polished surface **120***s* of the polymer layer **120***a* can be substantially flat and substantially coplanar with the top surface **86***u* of the conduction layer **86**. Next, an inorganic layer **120***b*, such as a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide, having a thickness, e.g., between 0.1 and 3 micrometers, and preferably between 0.2 and 1.5 micrometers, is formed on the top surface **86***u* of the conduction layer **86** and on the ground or polished surface **120***s* of the polymer layer **120***a*. Accordingly, the insulating or dielectric layer **120** as shown in FIG. **97** can be composed of the polymer layer **120***a* and the inorganic layer **120***b* as shown in FIG. **98**.

[0338] Referring to FIG. **99**, after forming the insulating or dielectric layer **120**, the following steps can be subsequently performed as illustrated in FIGS. **54-69** to place the chips **118** and the dummy substrate(s) **158** over the layer **140** formed on the layer **120**, to form the encapsulation/gap filling material **138** on the backside of the semiconductor substrate **124** of each chip **118**, on the dummy substrate(s) **158**, and in the gaps **4***b* and **8***b*, to grind or polish the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158**, to form the dielectric layer **139** on the ground or polished surfaces **124***s*, **138***s* and **158***s*, to form the through vias **156***v* in the chips **118** and in the dummy substrate(s) **158**, and to form the dielectric layer **127** on the top surface of the dielectric layer **139**, on the layers **17**, **19** and **86** exposed by the through vias **156***v*, and on the sidewalls of the through vias **156***v*. Next, by using an etching process (such as anisotropic etching process), the dielectric layer **127** formed on the layers **17**, **19** and **86** and on the top surface of the dielectric layer **139** is etched away, and a top portion of the dielectric layer **139** is further etched away. After the etching process, the dielectric layer **139** may have a remaining thickness T**24** between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.05 and 2 micrometers, between 0.05 and 1 micrometers, between 0.05 and 0.5 micrometers, or between 0.05 and 0.3 micrometers.

[0339] Alternatively, an etching-stop technique may be applied to the process of etching away the top portion of the dielectric layer **139**. In this case, the dielectric layer **139** is composed of the previously described inorganic layers, e.g., including the first silicon-oxide layer on the surfaces **124***s*, **138***s* and **158***s*, the silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and the second silicon-oxide layer on the silicon-oxynitride layer. During the etching process, the top portion of the dielectric layer **139**, that is, the second silicon-oxide layer, can be etched away until the etch stop layer, that is, the silicon-oxynitride layer, is exposed and all of the second silicon-oxide layer is removed. The remaining dielectric layer **139**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, may have a thickness T**24** between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.05 and 2 micrometers, between 0.05 and 1 micrometers, between 0.05 and 0.5 micrometers, or between 0.05 and 0.3 micrometers.

[0340] Accordingly, the dielectric layer **127** at bottoms of the through vias **156***v*, on the top surface of the dielectric layer **139** and on a top surface of the interconnect or metal trace **75***a* on the supporter **803** is etched away, and the dielectric layer **127** remains on the sidewalls of the through vias **156***v*, so called as sidewall dielectric layers in the through vias **156***v*. The sidewall dielectric layers **127** are formed on the sidewalls of the through vias **156***v* in the chips **118** or in the dummy substrate(s) **158** and are enclosed by the semiconductor substrates **124** of the chips **118** or by the dummy substrate(s) **158**.

[0341] Next, referring to FIG. **100**, an adhesion/barrier layer **125***a* having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, can be formed on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on the etched surface of the dielectric layer **139**, on the sidewall dielectric layers **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The adhesion/barrier layer **125***a* can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **125***b* having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, can be formed on the adhesion/barrier layer **125***a* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a photoresist layer **394** can be formed on the seed layer **125***b* by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **394***a*, exposing multiple regions of the seed layer **125***b*, in the photoresist layer **394**. The patterned photoresist layer **394** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, a conduction layer **125***c* having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers or between 1 and 5 micrometers, can be formed on the regions, exposed by the openings **394***a* in the layer **394**, of the seed layer **125***b* by using, e.g., an electroplating process.

[0342] The adhesion/barrier layer **125***a* may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **125***b* may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers. The conduction layer **125***c* may include or can be an electroplated metal layer of copper, gold, or silver having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers or between 1 and 5 micrometers.

[0343] For example, the adhesion/barrier layer **125***a* can be a titanium-containing layer, such as a single layer of titanium-tungsten alloy, titanium, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **17**, **19** and **86** exposed by the

through vias **156***v*, on the etched surface of the dielectric layer **139**, on the sidewall dielectric layers **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer. The conduction layer **125***c* can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers or between 1 and 5 micrometers, on the single layer of copper or a titanium-copper alloy.

[0344] Alternatively, the adhesion/barrier layer **125***a* can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on the etched surface of the dielectric layer **139**, on the sidewall dielectric layers **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer. The conduction layer **125***c* can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers or between 1 and 5 micrometers, on the single layer of copper or a titanium-copper alloy.

[0345] Alternatively, the adhesion/barrier layer **125***a* can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on the etched surface of the dielectric layer **139**, on the sidewall dielectric layers **127**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer. The conduction layer **125***c* can be an electroplated copper layer having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers or between 1 and 5 micrometers, on the single layer of copper or a titanium-copper alloy.

[0346] Next, referring to FIG. **101**, the patterned photoresist layer **394** is removed using, e.g., an organic chemical solution. Next, the seed layer **125***b* not under the conduction layer **125***c* is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Next, the adhesion/barrier layer **125***a* not under the conduction layer **125***c* is removed by using, e.g., a wet chemical etching process or a dry plasma etching process. Accordingly, the layers **125***a*, **125***b* and **125***c* over the dielectric layer **139** and over the through vias **156***v* compose multiple metal interconnects **3**, including metal interconnects **3***a*, **3***b* and **3***c*, over the dielectric layer **139** and over the through vias **156***v*. The adhesion/barrier layer **125***a* and the seed layer **125***b* of the metal interconnects **3** over the dielectric layer **139** are not at any sidewall **3***w* of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139**, but under a bottom of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139**. The sidewalls **3***w* of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139** are not covered by the layers **125***a* and **125***b*. The layers **125***a*, **125***b* and **125***c* in the through vias **156***v* compose multiple metal plugs (or metal vias) **7***p* in the through vias **156***v*, including metal plugs (or metal vias) **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f* as shown in FIGS. **73** and **99**, respectively. Each of the metal plugs **7***p* in the chips **118** and in the dummy substrate(s) **158** is enclosed by one of the sidewall dielectric layers **127** in the through vias **156***v*. The metal plug **7***a* is formed in the dummy substrate **158**, the metal plugs **7***b*, **7***c* and **7***d* are formed in one of the chips **118**, and the metal plugs **7***f* and **7***e* are formed in another one of the chips **118**. The supporter **803** and the interconnect or metal trace **75***a*, in the interconnection layer **17**, on the supporter **803** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **17** is positioned, of the metal plug **7***e*. These metal plugs **7***p* formed in the chips **118** and in the dummy substrate(s) **158** can connect the metal interconnects **3** and the semiconductor devices **13** in the chips **118** and connect the metal interconnects **2** and **3**.

[0347] One of the metal plugs **7***p*, such as the metal plug **7***a*, can be formed in the dummy substrate **158** and formed on a contact point, at a bottom of one of the through vias **156***v* (such as the through via **156***a*), of the conduction layer **86** of one of the metal interconnects **2**. Another one of the metal plugs **7***p*, such as the metal plug **7***b*, can be formed in one of the chips **118** and formed on another contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***b*), of the conduction layer **86** in another one of the metal interconnects **2**, such as the metal interconnect **2***a*. Another one of the metal plugs **7***p*, such as the metal plug **7***c*, can be formed in the one of the chips **118** and formed on a contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***c*), of the interconnect or metal trace **75***d* in the one of the chips **118**. Another one of the metal plugs **7***p*, such as the metal plug **7***d*, can be formed in the one of the chips **118** and formed on a contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***d*), of the interconnect or metal trace **75***c* in the one of the chips **118**. Another one of the metal plugs **7***p*, such as the metal plug **7***f*, can be formed in another one of the chips **118** and formed on a contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***f*), of the interconnect or metal trace **75***b* in the another one of the chips **118**. Another one of the metal plugs **7***p*, such as the metal plug **7***e*, can be formed in the another one of the chips **118**, formed on a contact point of the interconnect or metal trace **75***a* over a supporter (such as the supporter **803**) that is between two lower left and right portions of the another one of the metal plugs **7***p* (such as the metal plug **7***e*), and formed on another contact point, at a bottom of another one of the through vias **156***v* (such as the through via **156***e*), of the conduction layer **86** in another one of the metal interconnects **2**, such as the metal interconnect **2***b*.

[0348] The metal interconnect **3***a* can be formed over one or more of the chips **118**. The metal interconnect **3***b* can be formed over multiple of the chips **118** and across multiple edges of the multiple of the chips **118**. The metal interconnect **3***c* can be formed over one or more of the chips **118** and over the dummy substrate(s) **158**.

[0349] The metal interconnect **3***a* can be connected to a contact point, at a bottom of the through via **156***b*, of the metal interconnect **2***a* through the metal plug **7***b* in one of the chips **118** and can be connected to a contact point, at a bottom of the through via **156***c*, of the interconnect or metal trace **75***d* in the one of the chips **118** through the metal plug **7***c* in the one of the chips **118**. The metal interconnect **3***b* can be connected to a contact point, at a bottom of the through via **156***d*, of the interconnect or metal trace **75***c* in the one of the chips **118** through the metal plug **7***d* in the one of the chips **118** and can be connected to a contact point, at a bottom of the through via **156***f*, of the interconnect or metal trace **75***b* in another one of the chips **118** through the metal plug **7***f* in the another one of the chips **118**. The metal interconnect **3***c* can be connected to a contact point, at a bottom of the through via **156***e*, of the metal interconnect **2***b* through the metal plug **7***e* in the another one of the chips **118**, can be connected to one or more of the semiconductor devices **13** in the another one of the chips **118** through the metal plug **7***e* and the interconnect or metal trace **75***a* in the another one of the chips **118**, and can be connected to a contact point, at a bottom of the through via **156***a*, of another one of the metal interconnects **1** through the metal plug **7***a* in the dummy substrate **158**. Accordingly, the contact points at the bottoms of the through vias **156***b* and **156***c* can be connected to each other through the metal interconnect **3***a*, the contact points at the bottoms of the through vias **156***d* and **156***f* can be connected to each other through the metal interconnect **3***b*, and the contact points at the bottoms of the through vias **156***a* and **156***e* can be connected to each other through the metal interconnect **3***c*.

[0350] According, one of the semiconductor devices **13** in one of the chips **118** can be connected to another one of the semiconductor devices **13** in the one of the chips **118** or in another one of the chips **118** through one of the metal interconnects **3**, such as **3***a* or **3***b*, and can be connected to a contact point, at a bottom of one of the through vias **156***v* (such as the through via **156***a*, **156***b*, or **156***e*), of the conduction layer **86** of one of the metal interconnects **2**, such as **2***a* or **2***b*, through the one of the metal interconnects **3**. Each of the metal interconnects **3** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0351] Alternatively, the element **118** not only can indicate a chip, but also can indicate a wafer. When the element **118** is a wafer, the element **72** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0352] Next, referring to FIG. **102**, an insulating or dielectric layer **122** having a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers, is formed on the conduction layer **125***c* of the metal interconnects **3**, on the etched surface of the dielectric layer **139**, and in gaps between the metal interconnects **3**. Next, a polymer layer **136**, such as photosensitive polymer layer, is formed on the insulating or dielectric layer **122** by using, e.g., a spin coating process. Next, a photo exposure process and a chemical development process can be employed to form multiple openings **136***a*, exposing multiple regions of the insulating or dielectric layer **122**, in the polymer layer **136**. Next, the polymer layer **136** can be cured in a temperature between 180 degrees centigrade and 300 degrees centigrade or between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers. The polymer layer **136** can be a polyimide layer, a benzocyclobutene (BCB) layer, a polybenzoxazole (PBO) layer, a poly-phenylene oxide (PPO) layer, an epoxy layer, or a layer of SU-8.

[0353] The insulating or dielectric layer **122**, for example, may include or can be an inorganic layer, such as a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC), with a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers, formed by a process, e.g., including a chemical vapor deposition (CVD) process or a plasma-enhanced chemical vapor deposition (PECVD) process. Alternatively, the insulating or dielectric layer **122** may include or can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), with a thickness, e.g., between 0.3 and 10 micrometers, and preferably between 0.3 and 5 micrometers, between 0.3 and 3 micrometers, between 0.3 and 2 micrometers, or between 0.3 and 1 micrometers, formed by, e.g., using a spin coating process and then using a thermal curing process in a temperature between 150 degrees centigrade and 300 degrees centigrade.

[0354] Referring to FIG. **103**, after forming the structure illustrated in FIG. **102**, forming an under bump metallurgic (UBM) layer **666** on the polymer layer **136** and on multiple contact points, at bottoms of multiple openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**, forming multiple solder bumps or balls **126** on the UBM layer **666**, and singularizing multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555***e* and **555***f*, can be referred to as the steps illustrated in FIGS. **78-82**.

[0355] In some cases, the system-in package or multichip module **555***e* may further include multiple metal plugs or vias in the carrier **11**, multiple metal traces under the carrier **11**, and multiple passive components under the carrier **11**. The metal plugs or vias can be formed in multiple openings in the substrate **10** and the dielectric layer **12** of the carrier **11**, passing through the substrate **10** and the dielectric layer **12**, and connected to the conductive layer **18** of the carrier **11**. The metal plugs or vias may include or can be copper, aluminum, gold, or nickel. Alternatively, the metal plugs or vias may further include titanium, a titanium-tungsten alloy, titanium nitride, tantalum, tantalum nitride, a titanium-copper alloy, or chromium. The metal traces can be formed at a bottom side of the substrate **10** of the carrier **11** and connected to the conductive layer **18** of the carrier **11** through the metal plugs or vias. Each of the metal traces may include an electroplated metal layer and a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, or a titanium-copper alloy, and the electroplated metal layer may include or can be a layer of copper, gold, aluminum, or nickel. The passive components, such as capacitors, inductors, or resistors, can be boned with the metal traces using solders. One of the passive components can be connected to one of the metal plugs **5***p*, such as the metal plug **5***a*, **5***b*, **5***c*, **5***d*, **5***e* or **5***f*, through, in sequence, one of the solders, one of the metal traces at a bottom side of the substrate **10**, one of the metal

IPR2026-00067
TSMC EX1019 Page 288

plugs or vias in the substrate **10**, and a metal interconnect of the conductive layer **18** at the top side of the substrate **10**. The solders may include bismuth, indium, tin, a tin-lead alloy, a tin-silver alloy, a tin-silver-copper alloy, a tin-gold alloy, or a tin-copper alloy.

[0356] The system-in package or multichip module **555***e* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **104**, the system-in package or multichip module **555***e* can be bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, the under fill **174** illustrated in FIG. **83** can be formed between the polymer layer **136** of the system-in package or multichip module **555***e* and the top side of the carrier **176** and encloses the solder bumps or balls **126**. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**.

[0357] FIG. **105** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After forming the structure illustrated in FIG. **102**, forming multiple openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, forming an adhesion/barrier layer **134** on the polymer layer **136** and on multiple contact points, exposed by the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**, forming a seed layer **132** on the adhesion/barrier layer **134**, forming a photoresist layer **152** on the seed layer **132**, and forming multiple openings **152***a* in the photoresist layer **152** can be referred to as the steps illustrated in FIGS. **78** and **79**. Next, forming a metal layer **142** on multiple regions, exposed by the openings **152***a* in the photoresist layer **152**, of the seed layer **132** and in the openings **152***a*, forming a barrier layer **144** in the openings **152***a* and on the metal layer **142**, forming a solder wetting layer **146** in the openings **152***a* and on the barrier layer **144**, removing the photoresist layer **152**, removing the seed layer **132** not under the metal layer **142**, and removing the adhesion/barrier layer **134** not under the metal layer **142** can be referred to as the steps illustrated in FIG. **84**. Accordingly, the layers **132**, **134**, **142**, **144** and **146** compose multiple metal bumps **668** on the polymer layer **136** and on the contact points, at the bottoms of the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**. The metal bumps **668** may have a width, e.g, between 20 and 400 micrometers, and preferably between 50 and 100 micrometers, and a height, e.g., between 10 and 100 micrometers, and preferably between 20 and 60 micrometers. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **555***g* as shown in FIG. **105**. In the system-in package or multichip module **555***g*, each of the interconnects **3** can be connected to one or more of the metal bumps **668**, and the metal bumps **668** can be used for external connection.

[0358] The system-in package or multichip module **555***g* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **106**, the system-in package or multichip module **555***g* can be bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Next, the under fill **174** illustrated in FIG. **83** can be formed between the polymer layer **136** of the system-in package or multichip module **555***g* and the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**.

[0359] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **102-106** can be omitted. In this case, the polymer layer **136** is formed on the conduction layer **125***c* of the metal interconnects **3**, on the etched surface of the dielectric layer **139**, and in the gaps between the metal interconnects **3**, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0360] FIGS. **107** and **108** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **107**, after forming the structure illustrated in FIG. **101**, an insulating or dielectric layer **122** can be formed on the conduction layer **125***c* of the metal interconnects **3**, on the etched surface of the dielectric layer **139**, and in gaps between the metal interconnects **3**. The specifications of the layer **122** shown in FIG. **107** can be referred to as the specifications of the layer **122** as illustrated in FIG. **102**. Next, multiple openings **122***a* can be formed in the insulating or dielectric layer **122** and expose multiple regions of the conduction layer **125***c* of the metal interconnects **3**. Next, the metal interconnects or traces **300** illustrated in FIG. **86** can be formed on the insulating or dielectric layer **122** and on the regions, exposed by the openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**. The metal interconnects or traces **300** can be composed of the layers **148** and **150** illustrated in FIG. **86**, and the steps of forming the metal interconnects or traces **300** shown in FIG. **107** can be referred to as the steps of forming the metal interconnects or traces **300** as illustrated in FIG. **86**. Next, a polymer layer **136**, such as photosensitive polymer layer, can be formed on the insulating or dielectric layer **122** and on the metal interconnects or traces **300** by using, e.g., a spin coating process. Next, a photo exposure process and a chemical development process can be employed to form multiple openings **136***a*, exposing multiple contact points of the metal interconnects or traces **300**, in the polymer layer **136**. Next, the polymer layer **136** can be cured

in a temperature between 180 degrees centigrade and 300 degrees centigrade or between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers. The polymer layer **136** can be a polyimide layer, a benzocyclobutene (BCB) layer, a polybenzoxazole (PBO) layer, a poly-phenylene oxide (PPO) layer, an epoxy layer, or a layer of SU-8.

[0361] Next, referring to FIG. **108**, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555***h* and **555***i*.

[0362] FIG. **109** shows a multichip package **566***a* including the system-in package or multichip module **555***h* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**. The multichip package **566***a* is similar to the multichip package **566** shown in FIG. **88** except that the system-in package or multichip module **555***c* shown in FIG. **88** is replaced with the system-in package or multichip module **555***h*. The steps of forming the multichip package **566***a* packaged with the system-in package or multichip module **555***h* can be referred to as the steps of forming the multichip package **566** packaged with the system-in package or multichip module **555***c* as illustrated in FIG. **88**. The specifications of the glue layer **182**, the wirebonded wires **184**, and the molding compound **186** shown in FIG. **109** can be referred to as the specifications of the glue layer **182**, the wirebonded wires **184**, and the molding compound **186** as illustrated in FIG. **88**, respectively. The specifications of the solder balls **178** shown in FIG. **109** can be referred to as the specifications of the solder balls **178** as illustrated in FIG. **83**. The multichip package **566***a* can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**.

[0363] FIGS. **110-128** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **110**, multiple chips **68** are provided before bonding with a carrier **11**. The chips **68** shown in FIG. **110** are similar to the chips **68** shown in FIG. **7** except that each of the chips **68** shown in FIG. **110** further includes multiple metal bumps **891** under and on multiple contact points, exposed by and at ends of multiple openings **24***a* in the passivation layer **24**, of the patterned metal layer **26** and further includes an interconnect or metal trace **35***e* provided by the patterned metal layer **26**. The interconnect or metal trace **35***e* can be connected to one or more of the semiconductor devices **36**, but can be disconnected from the interconnect or metal trace **35***a*, **35***b*, **35***c* or **35***d*. The interconnect or metal trace **35***e* can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace. The element of the chips **68** in FIG. **110** indicated by a same reference number as indicates the element of the chips **68** in FIG. **7** has a same material and spec as the element of the chips **68** illustrated in FIG. **7**. In one case, one of the chips **68** may have different circuit designs from those of another one of the chips **68**. Also, in another case, one of the chips **68** may have same circuit designs as those of another one of the chips **68**. Alternatively, one of the chips **68** may have a different area (top surface) or size from that of another one of the chips **68**. Also, in another case, one of the chips **68** may have a same area (top surface) or size as that of another one of the chips **68**. The carrier **11** shown in FIG. **110** is similar to that shown in FIG. **1** except that the carrier **11** shown in FIG. **110** further includes multiple metal pads **892** on multiple contact points, at bottoms of multiple openings **20***a* in the dielectric or insulating layer **20**, of the conductive layer **18**. The contact points, at the bottoms of the openings **20***a*, of the conductive layer **18** can be separated from one another by the dielectric or insulating layer **20** of the carrier **11**.

[0364] The metal pads **892** can be composed of two metal layers **84***a* and **85**. The metal layer **85**, such as nickel layer, may have a thickness, e.g., between 2 and 10 micrometers and can be formed on the contact points, at the bottoms of the openings **20***a*, of the conductive layer **18** of the carrier **11** by, e.g., an electroplating or electroless plating process. The metal layer **84***a*, such as a layer of solder or gold, may have a thickness, e.g., between 2 and 15 micrometers and can be formed on the metal layer **85**, such as nickel layer, by, e.g., an electroplating or electroless plating process.

[0365] The metal bumps **891** can be composed of one or more metal layers, such as metal layers **83** and **84***b*. The metal layer **83** may include an adhesion/barrier layer, such as a layer of titanium, titanium nitride, a titanium-tungsten alloy, tantalum, tantalum nitride, or chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, formed under and on the contact points, at the tops of the openings **24***a*, of the patterned metal layer **26** of each chip **68** by, e.g., a sputtering process. The metal layer **83** may further include a seed layer, such as a layer of a titanium-copper alloy, copper, gold, or nickel, with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, formed under and on the adhesion/barrier layer by, e.g., a sputtering process. The metal layer **84***b*, for example, may include a copper layer with a thickness, e.g., between 0.5 and 20 micrometers, and preferably between 2 and 10 micrometers, formed under and on the seed layer, preferably the copper or titanium-copper-alloy seed layer, of the metal layer **83** by, e.g., an electroplating process, a nickel layer with a thickness, e.g., between 0.1 and 10 micrometers, and preferably between 0.2 and 5 micrometers, formed under and on the copper layer by, e.g., an electroplating or electroless plating process, and a solder layer of bismuth, indium, tin, a tin-lead alloy, a tin-silver alloy, a tin-copper alloy, or a tin-silver-copper alloy, used for bonding with the metal layer **84***a* (such as a layer of solder or gold) of the metal pads **892**, formed under and on the nickel layer by, e.g., an electroplating process. Alternatively, the metal layer **84***b* may include a copper layer with a thickness, e.g., between 2 and 100 micrometers, and preferably between 5 and 50 micrometers, formed under and on the seed layer, preferably the copper or titanium-copper-alloy seed layer, of the metal layer **83** by an electroplating process, a nickel layer with a thickness, e.g., between 2 and 10 micrometers, and preferably between 2 and 5 micrometers, formed under and on the copper layer by an electroplating or electroless plating process, and a gold layer, used for bonding with the metal layer **84***a* (such as a layer of solder or gold) of the metal pads **892**, formed under and on the nickel layer by an electroplating or electroless plating process. Alternatively, the metal layer **84***b* may include a nickel layer with a thickness, e.g., between 2 and 50 micrometers, and preferably between 5 and 25 micrometers, formed under and on the seed layer, preferably the copper or titanium-

copper-alloy seed layer, of the metal layer **83** by, e.g., an electroplating process, and a solder layer of bismuth, indium, tin, a tin-lead alloy, a tin-silver alloy, a tin-copper alloy, or a tin-silver-copper alloy, used for bonding with the metal layer **84***a* (such as a layer of solder or gold) of the metal pads **892**, formed under and on the nickel layer by, e.g., an electroplating or electroless plating process.

[0366] Referring to FIG. **111**, the chips **68** can be bonded with the carrier **11** using, e.g., a flip chip technology of joining the metal bumps **891** of the chips **68** with the metal pads **892** of the carrier **11**. In this process, the metal bumps **891** can be placed over the metal pads **892**, and then the bottommost layer, the previously described solder or gold layer, of the metal layer **84***b* of the metal bumps **891** and the topmost layer, the previously described solder or gold layer, of the metal layer **84***a* of the metal pads **892** can be melted or integrated into multiple metal joints **89** using a suitable process, such as heating or reflow process. Accordingly, the metal joints **89** can be formed between active sides of the chips **68** and a top side of the carrier **11**. Each of the metal joints **89** may be a layer of bismuth, indium, a tin-lead alloy, a tin-silver alloy, a tin-copper alloy, a tin-silver-copper alloy, a tin-gold alloy, or gold having a thickness, e.g., between 5 and 50 micrometers between the metal layer **85** and the previously described nickel layer in the remaining metal layer **84***b*, not shown in FIG. **111** but illustrated in FIG. **110**, under and on the metal layer **83**. The metal joints **89** can connect the interconnects or metal traces **35***b*, **35***c*, **35***d* and **35***e* of the chips **68** to multiple metal interconnects or traces of the conductive layer **18** of the carrier **11**. Next, an under fill **91** can be formed between the passivation layer **24** of each chip **68** and the top side of the carrier **11** and encloses the metal joints **89**. The under fill **91** may include epoxy, glass filler or carbon filler, and the glass filler or carbon filler can be distributed in the epoxy.

[0367] Next, referring to FIG. **112**, multiple separate dummy substrates **62** can be joined with the top side of the carrier **11** using a glue layer **22**. The glue layer **22** can be a polymer layer, such as a layer of epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or silosane, with a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers. When a gap between neighboring two chips **68** is too great, such as greater than 500 or 1,000 micrometers, one or more of the separate dummy substrates **62** can be placed in the gap. Alternatively, when a gap between neighboring two chips **68** is small enough, such as smaller than 500 or 1,000 micrometers, there can be no separate dummy substrates **62** placed in the gap. The separate dummy substrates **62**, for example, can be separate silicon bars, separate dummy chips, separate dummy silicon dies, or separate substrates of polysilicon, glass, silicon, or ceramic. In one embodiment, there are no circuits preformed in each separate dummy substrate **62** or on a top or bottom surface of each separate dummy substrate **62** before the separate dummy substrates **62** are joined with the carrier **11**.

[0368] Alternatively, the glue layer **22** can be replaced with a silicon-oxide layer that is preformed on a bottom side of each of the separate dummy substrates **62**. In this case, joining the separate dummy substrates **62** with the top side of the carrier **11** can be performed by bonding the silicon-oxide layer **22** preformed on each of the separate dummy substrates **62** with another silicon-oxide layer of the dielectric or insulating layer **20** of the carrier **11**. Accordingly, the separate dummy substrates **62** can be joined with the carrier **11** using these silicon-oxide layers.

[0369] FIG. **113** is a schematical top view showing the separate dummy substrates **62** and the chips **68** shown in FIG. **112** according to an embodiment, and FIG. **112** is the cross-sectional view cut along the line C-C shown in FIG. **113**. As shown in FIGS. **112** and **113**, there are multiple gaps **4** each between one of the chips **68** and one of the separate dummy substrates **62**, and there are multiple gaps **8** (one of them is shown) each between neighboring two chips **68**. Each of the gaps **4** may have a transverse distance or spacing D**1**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8** may have a transverse distance or spacing D**2**, e.g., smaller than 500 micrometers, such as between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0370] After the separate dummy substrates **62** are joined with the carrier **11**, the structure shown in FIG. **114** can be formed by the following steps. After forming the structure illustrated in FIG. **112**, the encapsulation/gap filling material **64** illustrated in FIG. **10** can be formed on a backside of the semiconductor substrate **58** of each chip **68**, on top sides of the separate dummy substrates **62**, and in the gaps **4** and **8**. Next, the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the separate dummy substrates **62** are ground or polished by, e.g., a chemical-mechanical-polishing (CMP) process, a mechanical polishing process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the semiconductor substrate **58** of one of the chips **68** is thinned to a thickness T**1**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Preferably, each of the chips **68**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. After the grinding or polishing process, one of the separate dummy substrates **62** can be thinned to a thickness T**2**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **64** remaining in the gaps **4** and **8** may have a vertical thickness T**3**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the ground or polished surfaces **62***s* of the separate dummy substrates **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The ground or polished surfaces **62***s* may be substantially coplanar with the ground or polished surface **58***s* of each chip **68** and with the ground or polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**. After the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the separate dummy substrates **62** are ground or polished by the above mentioned process, the dielectric layer **60** illustrated in FIG. **14** can be formed on the ground or polished surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the ground or polished surfaces **62***s* of the

separate dummy substrates **62**, and on the ground or polished surface **64***s* of the encapsulation/gap filling material **64**.

[0371] Alternatively, the structure shown in FIG. **114** can be formed by the following steps. After the separate dummy substrates **62** are joined with the carrier **11**, the encapsulation/gap filling material **64** illustrated in FIG. **12** can be formed on backsides of the semiconductor substrates **58** of the chips **68**, on top sides of the separate dummy substrates **62**, and in the gaps **4** and **8**. Next, the polymer **65** illustrated in FIG. **12** can be formed on the encapsulation/gap filling material **64** and in the gaps **4** and **8**. Next, the steps illustrated in FIG. **13** can be performed to remove the polymer layer **65**, to remove the encapsulation/gap filling material **64** not in the gaps **4** and **8**, to thin the semiconductor substrates **58** of the chips **68**, and to thin the separate dummy substrates **62**. Accordingly, the polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the polished surfaces **62***s* of the separate dummy substrates **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The polished surfaces **62***s* may be substantially coplanar with the polished surface **58***s* of each chip **68** and with the polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**. The polished surfaces **58***s*, **62***s* and **64***s* may have a micro-roughness, e.g., less than 20 nanometers. Each of the chips **68** can be thinned to a thickness, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers. The semiconductor substrate **58** of one of the chips **68** can be thinned to the thickness T**1** between 1 and 30 micrometers, and preferably between 2 and 5 micrometers, between 2 and 10 micrometers, between 2 and 20 micrometers, or between 3 and 30 micrometers. Each of the separate dummy substrates **62** can be thinned to the thickness T**2**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers. The encapsulation/gap filling material **64** in the gaps **4** and **8** can be thinned to the thickness T**3**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers. Thereafter, the dielectric layer **60** illustrated in FIG. **14** can be formed on the polished surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the polished surfaces **62***s* of the separate dummy substrates **62**, and on the polished surface **64***s* of the encapsulation/gap filling material **64**.

[0372] Referring to FIG. **115**, after forming the structure illustrated in FIG. **114**, multiple through vias **170***v*, including through vias **170***a*, **170***c*, **170***d*, **170***f* and **170***g*, can be formed in the chips **68** and in the separate dummy substrates **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**, by a suitable process or processes, e.g., by the following steps. First, a photoresist layer, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **60** by using, e.g., a spin coating process or a lamination process. Next, a photo exposure process using a 1X stepper and a development process using a chemical solution can be employed to form multiple openings, exposing the dielectric layer **60**, in the photoresist layer. The photoresist layer may have a thickness, e.g., between 3 and 50 micrometers. Next, the dielectric layer **60** under the openings in the photoresist layer can be removed by using, e.g., an anisotropic plasma etching process. Next, the separate dummy substrates **62** under the openings in the photoresist layer and the chips **68** under the openings in the photoresist layer can be etched away until predetermined regions of the layers **26** and **34** in the chips **68** and predetermined regions of the conductive layer **18** in the carrier **11** are exposed by the openings in the photoresist layer. Next, the photoresist layer can be removed by using, e.g., an organic chemical. Accordingly, the through vias **170***v*, including the through vias **170***a*, **170***c*, **170***d*, **170***f* and **170***g*, can be formed in the chips **68** and in the separate dummy substrates **62**, exposing multiple regions of the conductive layer **18** of the carrier **11** and exposing multiple regions of the layers **26** and **34** of the chips **68**. The through via **170***a* is formed in one of the separate dummy substrates **62**, and the through vias **170***c*, **170***d*, **170***f* and **170***g* are formed in the same chip **68**. Each of the through vias **170***v*, such as the through via **170***a*, **170***c*, **170***d*, **170***f*, or **170***g*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0373] One of the through vias **170***v*, such as the through via **170***a*, passes through the dielectric layer **60**, one of the separate dummy substrates **62**, the glue layer or silicon-oxide layer **22**, and the dielectric or insulating layer **20** of the carrier **11**, exposing a region of the conductive layer **18** of the carrier **11**. Another one of the through vias **170***v*, such as the through via **170***c*, passes through the dielectric layer **60** and through the semiconductor substrate **58** and dielectric layer **48** of one of the chips **68**, exposing the interconnect or metal trace **35***d* in the interconnection layer **34** of the one of the chips **68**. Another one of the through vias **170***v*, such as the through via **170***d*, passes through the dielectric layer **60** and through the semiconductor substrate **58** and dielectric layers **44**, **46** and **48** of one of the chips **68**, exposing the interconnect or metal trace **35***c* in the patterned metal layer **26** of the one of the chips **68**. Another one of the through vias **170***v*, such as the through via **170***f*, passes through the dielectric layer **60** and through the semiconductor substrate **58** and dielectric layer **48** of one of the chips **68**, exposing the interconnect or metal trace **35***b* in the interconnection layer **34** of the one of the chips **68**. Another one of the through vias **170***v*, such as the through via **170***g*, passes through the dielectric layer **60** and through the semiconductor substrate **58** and dielectric layers **44**, **46** and **48** of one of the chips **68**, exposing the interconnect or metal trace **35***a* in the interconnection layer **34** of the one of the chips **68** and exposing the interconnect or metal trace **35***e* in the patterned metal layer **26** of the one of the chips **68**. A supporter **804** provided by the dielectric layer **44** is between the interconnect or metal trace **35***a* exposed by the through via **170***g* and the interconnect or metal trace **35***e* under the through via **170***g* for the purpose of supporting the exposed interconnect or metal trace **35***a*. The supporter **804** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. FIGS. **116-119** are three examples of schematic top perspective views showing the through via **170***g* and the interconnects or metal traces **35***a* and **35***e* illustrated in FIG. **115**.

[0374] As shown in FIGS. **115** and **116**, the through via **170***g* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes two regions of the interconnect or metal trace **35***e* in the one of the chips **68**. The interconnect or metal trace **35***a* has a line-shaped region, exposed by the through via **170***g*, extending in a

IPR2026-00067
TSMC EX1019 Page 292

horizontal direction from a side of the through via **170***g* to the opposite side of the through via **170***g* through a center of the through via **170***g*. The supporter **804**, between the interconnect or metal trace **35***e* under the through via **170***g* and the exposed line-shaped region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **35***a*. Preferably, the through via **170***g* can be, but is not limited to, a circular shape from a top perspective view.

[0375] As shown in FIGS. **115** and **117**, the through via **170***g* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes a region of the interconnect or metal trace **35***e* in the one of the chips **68**. The interconnect or metal trace **35***a* has a peninsula region, exposed by the through via **170***g*, extending in a horizontal direction from one side of the through via **170***g* at least to a center of the through via **170***g*, but does not reach to the opposite side of the through via **170***g*; the interconnect or metal trace **35***a* has an end exposed by the through via **170***g*. The supporter **804**, between the interconnect or metal trace **35***e* under the through via **170***g* and the exposed peninsula region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **35***a*. Preferably, the through via **170***g* can be, but is not limited to, a circular shape from a top perspective view.

[0376] As shown in FIGS. **115** and **118**, the through via **170***g* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes a region of the interconnect or metal trace **35***e* in the one of the chips **68**. The interconnect or metal trace **35***a* has a peninsula region, exposed by the through via **170***g*, extending in a horizontal direction from one side of the through via **170***g* at least to a center of the through via **170***g*, but does not reach to the opposite side of the through via **170***g*; the interconnect or metal trace **35***a* has a circular end exposed by the through via **170***g*. The supporter **804**, between the interconnect or metal trace **35***e* under the through via **170***g* and the exposed peninsula region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **35***a*. Preferably, the through via **170***g* can be, but is not limited to, a circular shape from a top perspective view.

[0377] FIG. **119** is an example of a schematic top perspective view showing the through via **170***g* and the interconnects or metal traces **35***a* and **35***e* illustrated in FIG. **115**. In this case, the through via **170***g* can be, but is not limited to, oval-shaped and has a width W**7**, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers. The oval-shaped through via **170***g* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes two regions of the interconnect or metal trace **35***e* in the one of the chips **68**. The interconnect or metal trace **35***a* has a line-shaped region, exposed by the oval-shaped through via **170***g*, extending in a horizontal direction from a side of the oval-shaped through via **170***g* to the opposite side of the oval-shaped through via **170***g* through a center of the oval-shaped through via **170***g*. The supporter **804**, between the interconnect or metal trace **35***e* under the through via **170***g* and the exposed line-shaped region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **35***a*. The interconnect or metal trace **35***a* exposed by the oval-shaped through via **170***g* has a width W**8**, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 20 micrometers, between 0.3 and 10 micrometers, between 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. A horizontal distance S**4** between an endpoint of the long axis of the oval-shaped through via **170***g* and an edge, which is closer to the endpoint than the other opposite edge, of the interconnect or metal trace **35***a* exposed by the oval-shaped through via **170***g* can be, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers.

[0378] Next, referring to FIG. **120**, a dielectric layer **50** can be formed on a top surface of the dielectric layer **60**, on the conductive layer **18**, exposed by the through vias **170***v* (such as the through via **170***a*), of the carrier **11**, on the layers **26** and **34**, exposed by the through vias **170***v* (such as the through vias **170***c*, **170***d*, **170***f* and **170***g*), of the chips **68**, and on sidewalls of the through vias **170***v*. The specifications of the dielectric layer **50** shown in FIG. **120** can be referred to as the specifications of the dielectric layer **50** as illustrated in FIG. **19**.

[0379] Next, referring to FIG. **121**, a photoresist layer **168**, such as positive-type photo-sensitive resist layer or negative-type photo-sensitive resist layer, can be formed on the dielectric layer **50** by using, e.g., a spin coating process or a lamination process. Next, a photo exposure process using a 1X stepper and a development process using a wet chemical can be employed to form multiple openings **168***a*, exposing the dielectric layer **50**, in the photoresist layer **168**. The photoresist layer **168** may have a thickness, e.g., between 0.5 and 30 micrometers.

[0380] Next, referring to FIG. **122**, the dielectric layer **50** formed on the layers **18**, **26** and **34** and on the top surface of the dielectric layer **60** under the openings **168***a* can be removed by, e.g., etching the dielectric layer **50** under the openings **168***a* using an anisotropic plasma etching process. The dielectric layer **50** at bottoms of the through vias **170***v*, on the top surface of the dielectric layer **60** under the openings **168***a*, and on a top surface of the interconnect or metal trace **35***a* over the supporter **804** can be etched away. Accordingly, the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, the top surface of the dielectric layer **60** under the openings **168***a*, and the interconnect or metal trace **35***a* over the supporter **804** are exposed by the openings **168***a*, and the dielectric layer **50** remains on the sidewalls of the through vias **170***v*, so called as sidewall dielectric layers in the through vias **170***v*. The sidewall dielectric layers **50** are formed on the sidewalls of the through vias **170***v* in the chips **68** or in the dummy substrate(s) **62** and are enclosed by the semiconductor substrates **58** of the chips **68** or by the dummy substrate(s) **62**.

[0381] Next, referring to FIG. **123**, multiple trenches **60***t*, damascene openings, can be formed in the dielectric layer **60** by etching the dielectric layer **60** and the sidewall dielectric layers **50** under the openings **168***a* to a depth D**3**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers, using, e.g., an anisotropic plasma etching process. Preferably, the dielectric layer **60** and the sidewall dielectric layers **50** have a same material, such as silicon nitride, silicon oxide, or silicon oxynitride. After the etching process, the dielectric layer **60** under the trenches **60***t* has a remaining thickness T**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5

and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0382] Alternatively, an etching-stop technique may be applied to the process of forming the trenches **60***t* in the dielectric layer **60**. In this case, the dielectric layer **60** is composed of the previously described inorganic layers, e.g., including the first silicon-oxide layer on the surfaces **58***s*, **62***s* and **64***s*, the silicon-oxynitride layer, used as the etch stop layer, on the first silicon-oxide layer, and the second silicon-oxide layer on the silicon-oxynitride layer. The trenches **60***t* can be formed in the dielectric layer **60** by etching the second silicon-oxide layer of the dielectric layer **60** under the openings **168***a* and the sidewall dielectric layers **50** under the openings **168***a* until the silicon-oxynitride layer of the dielectric layer **60** is exposed by the openings **168***a*. Accordingly, the trenches **60***t* are formed in the second silicon-oxide layer of the dielectric layer **60**, and the remaining dielectric layer **60**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, under the trenches **60***t* has a thickness T**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0383] Next, referring to FIG. **124**, the photoresist layer **168** is removed by using, e.g., an organic chemical. The trenches **60***t* formed in the dielectric layer **60** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The sidewall dielectric layers **50** formed on the sidewalls of the through vias **170***v* (such as the through vias **170***c*, **170***d*, **170***f* and **170***g*) in the chips **68** can prevent transition metals, such as copper, sodium or moisture from penetrating into IC devices of the chips **68**. FIG. **125** is a schematic top perspective view showing the trenches **60***t*, the through vias **170***v* and the sidewall dielectric layers **50** shown in FIG. **124** according an embodiment of the present invention, and FIG. **124** is a cross-sectional view cut along the line D-D shown in FIG. **125**.

[0384] Next, referring to FIG. **126**, forming an adhesion/barrier layer **52** on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on sidewalls and bottoms of the trenches **60***t*, on the dielectric layer **50**, and on the interconnect or metal trace **35***a* that is on the supporter **804**, forming a seed layer **54** on the adhesion/barrier layer **52**, and forming a conduction layer **56** on the seed layer **54** can be referred to as the steps illustrated in FIG. **25**. The specifications of the layers **52**, **54** and **56** shown in FIG. **126** can be referred to as the specifications of the layers **52**, **54** and **56** as illustrated in FIG. **25**, respectively.

[0385] Next, referring to FIG. **127**, by using a grinding or polishing process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, the layers **52**, **54** and **56** outside the trenches **60***t* can be removed, and the dielectric layer **50** on the top surface of the dielectric layer **60** can be removed. Accordingly, the dielectric layer **60** has an exposed top surface **60***s* that can be substantially coplanar with the ground or polished surface **56***s* of the conduction layer **56** in the trenches **60***t*, and the surfaces **56***s* and **60***s* can be substantially flat. The dielectric layer **60** has a thickness T**7**, between the exposed top surface **60***s* and the surface **58***s* or **62***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers or between 2 and 5 micrometers. The adhesion/barrier layer **52** and the seed layer **54** are at sidewalls and a bottom of the conduction layer **56** in the trenches **60***t*, and the sidewalls and the bottom of the conduction layer **56** in the trenches **60***t* are covered by the adhesion/barrier layer **52** and the seed layer **54**.

[0386] In a first alternative, after the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the adhesion/barrier layer **52** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **804**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0387] In a second alternative, after the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the adhesion/barrier layer **52** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **804**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0388] In a third alternative, after the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the adhesion/barrier layer **52** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **804**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer. The conduction layer **56** can be

an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers.

[0389] After the steps of removing the layers **52**, **54** and **56** outside the trenches **60***t* and removing the dielectric layer **50** on the top surface of the dielectric layer **60**, the layers **52**, **54** and **56** in the trenches **60***t* compose multiple metal interconnects (or damascene metal traces) **1**, including metal interconnects (or damascene metal traces) **1***a* and **1***b*, in the trenches **60***t*. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***c*, **5***d*, **5***f* and **5***g* in the through vias **170***a*, **170***c*, **170***d*, **170***f* and **170***g* as shown in FIG. **124**, respectively. Each of the metal plugs **5***p* in the chips **68** and in the separate dummy substrates **62** is enclosed by one of the sidewall dielectric layers **50** in the through vias **170***v*. The metal plug **5***a* is formed in one of the separate dummy substrates **62**, and the metal plugs **5***c*, **5***d*, **5***f* and **5***g* are formed in the same chip **68**. The supporter **804** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **804** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***g*. These metal plugs **5***p* formed in the chips **68** and in the separate dummy substrates **62** can connect the metal interconnects **1** and the semiconductor devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**. The metal interconnects **1**, such as **1***a* and **1***b*, in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 1 and 3 micrometers.

[0390] For example, one of the metal plugs **5***p*, such as the metal plug **5***a*, can be formed in one of the separate dummy substrates **62** and formed on a contact point of the conductive layer **18** at a bottom of one of the through vias **170***v*, such as the through via **170***a*. Another one of the metal plugs **5***p*, such as the metal plug **5***c*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***c*), of the interconnect or metal trace **35***d* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***d*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***d*), of the interconnect or metal trace **35***c* in the patterned metal layer **26** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***f*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***f*), of the interconnect or metal trace **35***b* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***g*, can be formed in one of the chips **68**, formed on a contact point of the interconnect or metal trace **35***a* over a supporter (such as the supporter **804**) that is between two lower left and right portions of the another one of the metal plugs **5***p* (such as the metal plug **5***g*), and formed on one or more contact points of the interconnect or metal trace **35***e* under one of the through vias **170***v* (such as the through via **170***g*).

[0391] One of the metal interconnects **1**, such as **1***a* or **1***b*, can be formed over multiple of the separate dummy substrates **62**, over multiple of the chips **68**, across multiple edges of the multiple of the chips **68**, and across multiple edges of the multiple of the separate dummy substrates **62**. The metal interconnect **1***a* can be connected to the contact point, at the bottom of the through via **170***a*, of the conductive layer **18** through the metal plug **5***a* in one of the separate dummy substrates **62**, can be connected to the contact point, at the bottom of the through via **170***c*, of the interconnect or metal trace **35***d* in one of the chips **68** through the metal plug **5***c* in the one of the chips **68**, and can be connected to the contact point, at the bottom of the through via **170***d*, of the interconnect or metal trace **35***c* in the one of the chips **68** through the metal plug **5***d* in the one of the chips **68**. The metal interconnect **1***b* can be connected to the contact point, at the bottom of the through via **170***f*, of the interconnect or metal trace **35***b* in the one of the chips **68** through the metal plug **5***f* in the one of the chips **68**, can be connected to the contact point(s), at the bottom of the through via **170***g*, of the interconnect or metal trace **35***e* in the one of the chips **68** through the metal plug **5***g* in the one of the chips **68**, and can be connected to the interconnect or metal trace **35***a* on the supporter **804** through the metal plug **5***g*. The metal interconnect **1***a* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**. The metal interconnect **1***b* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**.

[0392] Accordingly, one of the semiconductor devices **36** in one of the chips **68** can be connected to another one of the semiconductor devices **36** in the one of the chips **68** or in another one of the chips **68** through one of the metal interconnects **1**, such as **1***a* or **1***b*, and can be connected to a contact point, at a bottom of one of the through vias **170***v* (such as the through via **170***a*), of the conductive layer **18** in the carrier **11** through the one of the metal interconnects **1**. Each of the metal interconnects **1** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0393] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0394] Referring to FIG. **128**, after forming the structure shown in FIG. **127**, the following steps can be subsequently performed as illustrated in FIGS. **27-81**, and then a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555***j* and **555***k*.

[0395] Alternatively, before the singulation process, multiple metal plugs or vias can be formed in multiple openings in the substrate **10** and the dielectric layer **12** of the carrier **11**, passing through the substrate **10** and the dielectric layer **12**, and connected to the conductive layer **18** of the carrier **11**. The metal plugs or vias may include or can be copper, aluminum, gold, or nickel. Alternatively, the metal plugs or vias may further include titanium, a titanium-tungsten alloy, titanium nitride, tantalum, tantalum nitride, a titanium-copper alloy, or chromium. Next, multiple metal traces can be formed at a bottom side of the substrate **10** and connected to the conductive layer **18** of the carrier **11** through the metal plugs or vias.

Each of the metal traces may include a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, or a titanium-copper alloy under the bottom side of the substrate **10**, and an electroplated metal layer under the layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, or a titanium-copper alloy. The electroplated metal layer may include or can be a layer of copper, gold, aluminum, or nickel. Next, multiple passive components, such as capacitors, inductors or resistors, can be attached to the bottom side of the substrate **10** and boned with the metal traces using solders. The solders may include bismuth, indium, tin, a tin-lead alloy, a tin-silver alloy, a tin-silver-copper alloy, a tin-gold alloy, or a tin-copper alloy. After the passive components are boned with the metal traces, the singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as the system-in packages or multichip modules **555***j* and **555***k*.

[0396] Accordingly, the system-in package or multichip module **555***j* may have one of the passive components that has a first terminal connected to the metal plug **5***a* as shown in FIG. **127** through, in sequence, one of the solders, one of the metal traces at the bottom side of the substrate **10**, one of the metal plugs or vias in the substrate **10**, and a metal interconnect of the conductive layer **18** at the top side of the substrate **10**, and has a second terminal connected to one of the metal joints **89**, which can be connected to the metal plug **5***f* or **5***g* as shown in FIG. **127**, through, in sequence, another one of the solders, another one of the metal traces at the bottom side of the substrate **10**, another one of the metal plugs or vias in the substrate **10**, and another metal interconnect of the conductive layer **18** at the top side of the substrate **10**.

[0397] Alternatively, the system-in package or multichip module **555***j* may have one of the passive components that has a first terminal connected to one of the metal joints **89**, which can be connected to the metal plug **5***c* or **5***d* as shown in FIG. **127**, through, in sequence, one of the solders, one of the metal traces at the bottom side of the substrate **10**, one of the metal plugs or vias in the substrate **10**, and a metal interconnect of the conductive layer **18** at the top side of the substrate **10**, and has a second terminal connected to another one of the metal joints **89**, which can be connected to the metal plug **5***f* or **5***g* as shown in FIG. **127**, through, in sequence, another one of the solders, another one of the metal traces at the bottom side of the substrate **10**, another one of the metal plugs or vias in the substrate **10**, and another metal interconnect of the conductive layer **18** at the top side of the substrate **10**.

[0398] The system-in package or multichip module **555***j* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **129**, the system-in package or multichip module **555***j* can be bonded with a top side of a carrier **176** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, an under fill **174** can be formed between the polymer layer **136** of the system-in package or multichip module **555***j* and the top side of the carrier **176** and encloses the solder bumps or balls **126**. Next, multiple solder balls **178** can be formed on a bottom side of the carrier **176**. The specifications of the carrier **176**, the under fill **174**, and the solder balls **178** shown in FIG. **129** can be referred to as the specifications of the carrier **176**, the under fill **174**, and the solder balls **178** as illustrated in FIG. **83**, respectively.

[0399] FIG. **130** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After forming the structure shown in FIG. **127**, the steps as illustrated in FIGS. **27-79** can be subsequently performed. Next, forming metal bumps **668** on the polymer layer **136** and on the contact points, at the bottoms of the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** can be referred to as the steps illustrated in FIG. **84**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **555***m*. In the system-in package or multichip module **555***m*, each of the interconnects **3** can be connected to one or more of the metal bumps **668**.

[0400] The system-in package or multichip module **555***m* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **131**, the system-in package or multichip module **555***m* can be bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Alternatively, the metal joints **180** can be a gold layer having a thickness between 0.1 and 10 micrometers. Next, the under fill **174** illustrated in FIG. **83** can be formed between the polymer layer **136** of the system-in package or multichip module **555***m* and the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**.

[0401] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **128-131** can be omitted. In this case, the polymer layer **136** is formed on the surfaces **223**, **225**, **227** and **139***s*, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0402] FIG. **132** shows a multichip package **566***b* including a system-in package or multichip module **555***n* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**, which can be formed by, e.g., the following steps. After forming the structure shown in FIG. **127**, the steps as illustrated in FIGS. **27-76** can be subsequently performed.

Next, forming an insulating or dielectric layer **122** on the ground or polished surfaces of the layers **125***a* and **125***b*, on the ground or polished surface **227** of the conduction layer **125***c*, and on the exposed top surface **139***s* of the dielectric layer **139**, forming multiple metal interconnects or traces **300** on the insulating or dielectric layer **122** and on multiple regions, exposed by multiple openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**, and forming a polymer layer **136** on the insulating or dielectric layer **122** and on the metal interconnects or traces **300** can be referred to as the steps illustrated in FIG. **86**. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers, and multiple openings **136***a* in the polymer layer **136** expose multiple contact points of the metal interconnects or traces **300**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as the system-in package or multichip module **555***n*.

[0403] Next, a plurality of the system-in package or multichip module **555***n* can be joined with the carrier **176** shown in FIG. **83** by, e.g., forming a glue layer **182** with a thickness between 20 and 150 micrometers on the top side of the carrier **176**, and then attaching the plurality of the system-in package or multichip module **555***n* to the top side of the carrier **11** using the glue layer **182**. The glue layer **182** can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), poly-phenylene oxide (PPO), silosane, or SU-8, with a thickness, e.g., between 20 and 150 micrometers. Next, multiple wires **184**, such as gold wires, copper wires, or aluminum wires, can be wirebonded onto the top side of the carrier **176** and onto the contact points, exposed by the openings **136***a* in the polymer layer **136**, of the conduction layer **150** of the metal interconnects or traces **300** by a wirebonding process. Accordingly, the metal interconnects or traces **300** of the plurality of the system-in package or multichip module **555***n* can be physically and electrically connected to the carrier **176** through the wirebonded wires **184**. Next, a molding compound **186** can be formed on the plurality of the system-in package or multichip module **555***n*, on the top side of the carrier **176** and on the wirebonded wires **184**, encapsulating the wirebonded wires **184** and the plurality of the system-in package or multichip module **555***n*, by a molding process. The molding compound **186** may include epoxy, carbon filler or glass filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**. Thereafter, a singulation process can be performed to cut the carrier **176** and the molding compound **186** and to singularize a plurality of the multichip package **566***b*. The multichip package **566***b* can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**.

[0404] FIGS. **133-136** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **133**, after forming the structure illustrated in FIG. **120**, the dielectric layer **50** formed on the layers **18**, **26** and **34** and on the top surface of the dielectric layer **60** is etched away, and a top portion of the dielectric layer **60** is etched away, which can be referred to as the steps illustrated in FIG. **89**. Accordingly, the dielectric layer **50** at bottoms of the through vias **170***v*, on the top surface of the dielectric layer **60** and on a top surface of the interconnect or metal trace **35***a* over the supporter **804** is etched away, and the dielectric layer **50** remains on the sidewalls of the through vias **170***v*, so called as sidewall dielectric layers in the through vias **170***v*. The sidewall dielectric layers **50** are formed on the sidewalls of the through vias **170***v* in the chips **68** or in the dummy substrate(s) **62** and are enclosed by the semiconductor substrates **58** of the chips **68** or by the dummy substrate(s) **62**. The dielectric layer **60** may have a remaining thickness T**22** between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.05 and 2 micrometers, between 0.05 and 1 micrometers, between 0.05 and 0.5 micrometers, or between 0.05 and 0.3 micrometers.

[0405] Next, referring to FIG. **134**, forming an adhesion/barrier layer **52** on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on the etched surface of the dielectric layer **60**, on the sidewall dielectric layers **50**, and on the interconnect or metal trace **35***a* that is on the supporter **804**, forming a seed layer **54** on the adhesion/barrier layer **52**, forming a photoresist layer **194** on the seed layer **54**, forming multiple openings **194***a* in the photoresist layer **194**, and forming a conduction layer **56** on multiple regions, exposed by the openings **194***a* in the layer **194**, of the seed layer **54** can be referred to as the steps illustrated in FIG. **90**.

[0406] Next, referring to FIG. **135**, the photoresist layer **194** is removed using, e.g., an organic chemical solution. Next, the seed layer **54** not under the conduction layer **56** is removed by a suitable process, such as wet chemical etching process or dry plasma etching process. Next, the adhesion/barrier layer **52** not under the conduction layer **56** is removed by a suitable process, such as wet chemical etching process or dry plasma etching process. Accordingly, the layers **52**, **54** and **56** over the dielectric layer **60** and over the through vias **170***v* compose multiple metal interconnects **1**, including metal interconnects **1***a* and **1***b*, over the dielectric layer **60** and over the through vias **170***v*. The adhesion/barrier layer **52** and the seed layer **54** of the metal interconnects **1** over the dielectric layer **60** are not at any sidewall **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**, but under a bottom of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**. The sidewalls **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60** are not covered by the layers **52** and **54**. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***c*, **5***d*, **5***f* and **5***g* in the through vias **170***a*, **170***c*, **170***d*, **170***f* and **170***g* as shown in FIG. **133**, respectively. Each of the metal plugs **5***p* in the chips **68** and in the separate dummy substrates **62** is enclosed by one of the sidewall dielectric layers **50** in the through vias **170***v*. The metal plug **5***a* is formed in one of the separate dummy substrates **62**, and the metal plugs **5***c*, **5***d*, **5***f* and **5***g* are formed in the same chip **68**. The supporter **804** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **804** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***g*. These metal plugs **5***p* formed in the chips **68** and in the separate dummy substrates **62** can connect the metal interconnects **1** and the semiconductor devices **36** of the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**.

[0407] For example, one of the metal plugs **5***p*, such as the metal plug **5***a*, can be formed in one of the separate dummy substrates **62** and formed on a contact point of the conductive layer **18** at a bottom of one of the through vias **170***v*, such as the through via **170***a*. Another one of the metal plugs **5***p*, such as the metal plug **5***c*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***c*), of the interconnect or metal trace **35***d* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***d*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***d*), of the interconnect or metal trace **35***c* in the patterned metal layer **26** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***f*, can be formed in one of the chips **68** and formed on a contact point, at a bottom of another one of the through vias **170***v* (such as the through via **170***f*), of the interconnect or metal trace **35***b* in the interconnection layer **34** of the one of the chips **68**. Another one of the metal plugs **5***p*, such as the metal plug **5***g*, can be formed in one of the chips **68**, formed on a contact point of the interconnect or metal trace **35***a* over a supporter (such as the supporter **804**) that is between two lower left and right portions of the another one of the metal plugs **5***p* (such as the metal plug **5***g*), and formed on one or more contact points of the interconnect or metal trace **35***e* under one of the through vias **170***v* (such as the through via **170***g*).

[0408] One of the metal interconnects **1**, such as **1***a* or **1***b*, can be formed over multiple of the separate dummy substrates **62**, over multiple of the chips **68**, across multiple edges of the multiple of the chips **68**, and across multiple edges of the multiple of the separate dummy substrates **62**. The metal interconnect **1***a* can be connected to the contact point, at the bottom of the through via **170***a*, of the conductive layer **18** through the metal plug **5***a* in one of the separate dummy substrates **62**, can be connected to the contact point, at the bottom of the through via **170***c*, of the interconnect or metal trace **35***d* in one of the chips **68** through the metal plug **5***c* in the one of the chips **68**, and can be connected to the contact point, at the bottom of the through via **170***d*, of the interconnect or metal trace **35***c* in the one of the chips **68** through the metal plug **5***d* in the one of the chips **68**. The metal interconnect **1***b* can be connected to the contact point, at the bottom of the through via **170***f*, of the interconnect or metal trace **35***b* in the one of the chips **68** through the metal plug **5***f* in the one of the chips **68**, can be connected to the contact point(s), at the bottom of the through via **170**g, of the interconnect or metal trace **35***e* in the one of the chips **68** through the metal plug **5***g* in the one of the chips **68**, and can be connected to the interconnect or metal trace **35***a* on the supporter **804** through the metal plug **5***g*. The metal interconnect **1***a* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**. The metal interconnect **1***b* can be further connected to one or more of the semiconductor devices **36** in another one of chips **68** through one or more of the metal plugs **5***p* in the another one of chips **68**.

[0409] Accordingly, one of the semiconductor devices **36** in one of the chips **68** can be connected to another one of the semiconductor devices **36** in the one of the chips **68** or in another one of the chips **68** through one of the metal interconnects **1**, such as **1***a* or **1***b*, and can be connected to a contact point, at a bottom of one of the through vias **170***v* (such as the through via **170***a*), of the conductive layer **18** in the carrier **11** through the one of the metal interconnects **1**. Each of the metal interconnects **1** can be a signal trace, a bit line, a clock bus, a power plane, a power bus, a power trace, a ground plane, a ground bus, or a ground trace.

[0410] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0411] Referring to FIG. **136**, after forming the structure illustrated in FIG. **135**, the steps as illustrated in FIGS. **92-103** can be subsequently performed to form multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555***o* and **555***p*.

[0412] In some cases, the system-in package or multichip module **555***o* may further include multiple metal plugs or vias in the carrier **11**, multiple metal traces under the carrier **11**, and multiple passive components under the carrier **11**. The detailed description about the metal plugs or vias in the carrier **11** and about the metal traces under the carrier **11** can be referred to as those illustrated in FIG. **103**. The passive components, such as capacitors, inductors, or resistors, can be boned with the metal traces using solders. One of the passive components can be connected to one of the metal plugs **5***p*, such as the metal plug **5***a*, **5***c*, **5***d*, **5***f*, or **5***g*, through, in sequence, one of the solders, one of the metal traces at a bottom side of the substrate **10**, one of the metal plugs or vias in the substrate **10**, and a metal interconnect of the conductive layer **18** at the top side of the substrate **10**. The solders may include bismuth, indium, tin, a tin-lead alloy, a tin-silver alloy, a tin-silver-copper alloy, a tin-gold alloy, or a tin-copper alloy.

[0413] The system-in package or multichip module **555***o* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **137**, the system-in package or multichip module **555***o* is bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, the under fill **174** illustrated in FIG. **83** is formed between the polymer layer **136** of the system-in package or multichip module **555***o* and the top side of the carrier **176** and encloses the solder bumps or balls **126**. Next, the solder balls **178** illustrated in FIG. **83** is formed on the bottom side of the carrier **176**.

[0414] FIG. **138** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After forming the structure illustrated in FIG. **135**, the steps as illustrated in FIGS. **92-102** can be subsequently performed, and then the steps illustrated in FIGS. **78** and **79** can be subsequently performed. Next, forming metal bumps **668** on the polymer layer **136** and on the contact points, at the bottoms of the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** can be referred to as the steps illustrated in FIG. **84**. Next, a singulation process is performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing

or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **555***q*. In the system-in package or multichip module **555***q*, each of the interconnects **3** can be connected to one or more of the metal bumps **668**.

[0415] The system-in package or multichip module **555***q* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **139**, the system-in package or multichip module **555***q* is bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Alternatively, the metal joints **180** can be a gold layer having a thickness between 0.1 and 10 micrometers. Next, the under fill **174** illustrated in FIG. **83** is formed between the polymer layer **136** of the system-in package or multichip module **555***q* and the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** is formed on the bottom side of the carrier **176**.

[0416] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **136-139** can be omitted. In this case, the polymer layer **136** is formed on the conduction layer **125***c* of the metal interconnects **3**, on the etched surface of the dielectric layer **139**, and in the gaps between the metal interconnects **3**, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0417] FIG. **140** shows a multichip package **566***c* including a system-in package or multichip module **555***r* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**, which can be formed by, e.g., the following steps. After forming the structure shown in FIG. **135**, the steps as illustrated in FIGS. **92-101** can be subsequently performed. Next, forming an insulating or dielectric layer **122** on the conduction layer **125***c* of the metal interconnects **3**, on the etched surface of the dielectric layer **139**, and in gaps between the metal interconnects **3**, forming multiple metal interconnects or traces **300** on the insulating or dielectric layer **122** and on multiple regions, exposed by multiple openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**, and forming a polymer layer **136** on the insulating or dielectric layer **122** and on the metal interconnects or traces **300** can be referred to as the steps illustrated in FIG. **107**. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers, and multiple openings **136***a* in the polymer layer **136** expose multiple contact points of the metal interconnects or traces **300**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as the system-in package or multichip module **555***r*.

[0418] Next, a plurality of the system-in package or multichip module **555***r* can be joined with the carrier **176** shown in FIG. **83** by, e.g., forming a glue layer **182** with a thickness between 20 and 150 micrometers on the top side of the carrier **176**, and then attaching the plurality of the system-in package or multichip module **555***r* to the top side of the carrier **11** using the glue layer **182**. The glue layer **182** can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), poly-phenylene oxide (PPO), silosane, or SU-8, with a thickness, e.g., between 20 and 150 micrometers. Next, multiple wires **184**, such as gold wires, copper wires, or aluminum wires, can be wirebonded onto the top side of the carrier **176** and onto the contact points, exposed by the openings **136***a* in the polymer layer **136**, of the conduction layer **150** of the metal interconnects or traces **300** by a wirebonding process. Accordingly, the metal interconnects or traces **300** of the plurality of the system-in package or multichip module **555***r* can be physically and electrically connected to the carrier **176** through the wirebonded wires **184**. Next, a molding compound **186** can be formed on the plurality of the system-in package or multichip module **555***r*, on the top side of the carrier **176** and on the wirebonded wires **184**, encapsulating the wirebonded wires **184** and the plurality of the system-in package or multichip module **555***r*, by a molding process. The molding compound **186** may include epoxy, carbon filler or glass filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**. Thereafter, a singulation process can be performed to cut the carrier **176** and the molding compound **186** and to singularize a plurality of the multichip package **566***c*. The multichip package **566***c* can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**.

[0419] Alternatively, the chips **68** illustrated in FIGS. **7-109** can be replaced with another type of chips **68** shown in FIG. **141**J that further include insulating rings **500***a* thicker than shallow trench isolation (STI) **500***b*. FIGS. **141**A-**141**J show a process for forming the another type of chips **68** according to an embodiment of the present disclosure. Referring to FIG. **141**A, an insulating layer **301** having a thickness, e.g., between 10 and 250 nanometers can be formed on a semiconductor substrate **58** of a wafer **680**. The semiconductor substrate **58** can be a silicon-germanium (SiGe) substrate, a gallium-arsenide (GaAs) substrate, or a silicon substrate with a thickness, e.g., greater than 100 micrometers, such as between 100 and 500 micrometers, and preferably between 150 and 250 micrometers or between 100 and 300 micrometers. The insulating layer **301**, for example, can be composed of a pad oxide having a thickness between 1 and 20 nanometers on a top surface of the semiconductor substrate **58**, and a silicon-nitride layer having a thickness between 10 and 200 nanometers on the pad oxide. After forming the insulating layer **301** on the top surface of the semiconductor substrate **58**, a patterned photoresist layer **302** can be formed on the silicon-nitride layer of the insulating layer **301**. Multiple openings **302***a* in the patterned photoresist layer **302** expose multiple regions of the silicon-nitride layer of the insulating layer **301**.

[0420] Next, referring to FIG. **141**B, multiple shallow trenches **303** can be formed in the semiconductor substrate **58** by removing the insulating layer **301** under the openings **302***a* and etching the semiconductor substrate **58** under the openings **302***a*, leading the shallow trenches **303** with a depth D**10** in the semiconductor substrate **58**, e.g., between 0.1 and 0.5 micrometers, and preferably between 0.15 and 0.4 micrometers.

[0421] Next, referring to FIG. **141**C, the patterned photoresist layer **302** is removed using a chemical solution, and then a patterned photoresist layer **304** can be formed on the silicon-nitride layer of the insulating layer **301**. Multiple ring-shaped openings **304***a* in the patterned photoresist layer **304** expose multiple ring-shaped regions of the silicon-nitride layer of the insulating layer **301**.

[0422] Next, referring to FIG. **141**D, multiple ring-shaped trenches **305** are formed in the semiconductor substrate **58** by removing the insulating layer **301** under the ring-shaped openings **304***a* and etching the semiconductor substrate **58** under the ring-shaped openings **304***a*, leading the ring-shaped trenches **305** with a depth D**11** in the semiconductor substrate **58**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers. The ring-shaped trenches **305** can be like circular rings, oval rings, square rings, rectangle-shaped rings, or polygon-shaped rings.

[0423] Next, referring to FIGS. **141**E and **141**F, the patterned photoresist layer **304** is removed using a chemical solution. FIG. **141**E shows a schematic top view of the trenches **303** and **305** as shown in FIG. **141**F, and FIG. **141**F can be a cross-sectional view cut along the line L-L shown in FIG. **141**E. The shallow trenches **303** formed in the semiconductor substrate **58** are used to accommodate a shallow trench isolation (STI). The ring-shaped trenches **305** formed in the semiconductor substrate **58** are used to accommodate insulating rings. Each of the ring-shaped trenches **305** may have a transverse width W**9** between an outer point on the outer periphery and an inner point, closest to the outer point, on the inner periphery, and the transverse width W**9** can be between 0.1 and 20 micrometers, between 0.1 and 10 micrometers, between 0.1 and 5 micrometers, between 0.1 and 2 micrometers, or between 0.1 and 1 micrometers. A horizontal distance D**12** between two opposite points on the outer periphery of each of the ring-shaped trenches **305** can be between 2 and 100 micrometers, between 2 and 50 micrometers, between 2 and 20 micrometers, between 2 and 10 micrometers, or between 2 and 5 micrometers. If the outer periphery is circle-shaped, the horizontal distance D**12** is the diameter (width) of the circle-shaped outer periphery. Alternatively, if the outer periphery is oval-shaped, the horizontal distance D**12** is the longest diameter (width) of the oval-shaped outer periphery.

[0424] Next, referring to FIG. **141**G, an inorganic material **500**, insulating material, can be formed on the silicon-nitride layer of the insulating layer **301** and in the trenches **303** and **305** by using a suitable process, such as chemical vapor deposition (CVD) process. The inorganic material **500** may include or can be silicon oxide or silicon nitride.

[0425] Next, referring to FIG. **141**H, the inorganic material **500** outside the trenches **303** and **305** can be removed by a suitable process, such as chemical mechanical polishing (CMP) process, and all of the insulating layer **301** can be further etched away by using a chemical solution. Accordingly, the inorganic material **500** remains in the ring-shaped trenches **305**, so called as insulating rings **500***a*, enclosing walls, and remains in the shallow trenches **303**, so called as shallow trench isolation (STI) **500***b*. Each of the insulating rings **500***a* may include or can be silicon oxide or silicon nitride and may have a thickness T**26**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers. The shallow trench isolation (STI) **500***b* may include or can be silicon oxide or silicon nitride and may have a thickness T**25**, e.g., between 0.1 and 0.5 micrometers, and preferably between 0.15 and 0.4 micrometers. A vertical distance D**13** between a bottom of one of the insulating rings **500***a* and a bottom of the shallow trench isolation **500***b* can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0426] Next, referring to FIG. **141**I, multiple semiconductor devices **36** can be formed in and/or on the semiconductor substrate **58**, and then multiple dielectric layers **42**, **44**, **46** and **48**, multiple via plugs **26***a* and **34***a*, an interconnection layer **34**, a patterned metal layer **26** and a passivation layer **24** can be formed over the top surface of the semiconductor substrate **58**.

[0427] Next, referring to FIG. **141**J, a singulation process can be performed to cut the semiconductor substrate **58** and the layers **24**, **42**, **44**, **46** and **48** of the wafer **680** and to singularize multiple chips **68** (one of them is shown). Each of the chips **68** includes the previously described interconnects or metal traces **35***a*, **35***b*, **35***c* and **35***d*. The element of the chips **68** in FIG. **141**J indicated by a same reference number as indicates the element of the chips **68** in FIG. **7** has a same material and spec as the element of the chips **68** illustrated in FIG. **7**. The chips **68** shown in FIG. **141**J are reverse arrangement of the chips **68** shown in FIG. **7**.

[0428] Alternatively, each of the chips **72** illustrated in FIGS. **33**-**109** can be replaced with another type of chip **72***a* or **72***b* shown in FIG. **141**K that further includes insulating rings **500***a* thicker than shallow trench isolation (STI) **500***b*. FIG. **141**K shows cross-sectional views of chips **72***a* and **72***b* according to an embodiment of the present disclosure. The element of the chips **72***a* and **72***b* in FIG. **141**K indicated by a same reference number as indicates the element of the chips **72** in FIG. **33** has a same material and spec as the element of the chips **72** illustrated in FIG. **33**. The chips **72***a* and **72***b* shown in FIG. **141**K are reverse arrangement of the chips **72** shown in FIG. **33**. Referring to FIG. **141**K, each of the chips **72***a* and **72***b* is provided with the semiconductor substrate **96**, the insulating rings **500***a*, the shallow trench isolation (STI) **500***b*, the semiconductor devices **102**, the passivation layer **74**, the dielectric layers **82**, **108**, **104** and **100**, the patterned metal layer **114**, the interconnection layer **106**, and the via plugs **106***a* and **114***a*. The steps of forming the insulating rings **500***a* in the ring-shaped trenches **305** in the semiconductor substrate **96** and forming the shallow trench isolation (STI) **500***b* in the shallow trenches **303** in the semiconductor substrate **96** can be referred to as the steps of forming the insulating rings **500***a* in the ring-shaped trenches **305** in the semiconductor substrate **58** and forming the shallow trench isolation (STI) **500***b* in the shallow trenches **303** in the semiconductor substrate **58** as illustrated in FIGS. **141**A-**141**H. The specifications of the shallow trenches **303**, the ring-shaped trenches **305**, the insulating rings **500***a*, and the shal-

low trench isolation (STI) **500***b* can be referred to as the specifications of the shallow trenches **303**, the ring-shaped trenches **305**, the insulating rings **500***a*, and the shallow trench isolation (STI) **500***b*, respectively, illustrated in FIGS. **141**A-**141**H.

[0429] In one case, the chip **72***a* may have different circuit designs from those of the chip **72***b*. Also, in another case, the chip **72***a* may have same circuit designs as those of the chip **72***b*. Alternatively, the chip **72***a* may have a different area (top surface) or size from that of the chip **72***b*. Also, in another case, the chip **72***a* may have a same area (top surface) or size as that of the chip **72***b*.

[0430] Alternatively, each of the chips **118** illustrated in FIGS. **57**-**109** can be replaced with another type of chip **118***a* or **118***b* shown in FIG. **141**L that further includes insulating rings **500***a* thicker than shallow trench isolation (STI) **500***b*. FIG. **141**L shows cross-sectional views of chips **118***a* and **118***b* according to an embodiment of the present disclosure. The element of the chips **118***a* and **118***b* in FIG. **141**L indicated by a same reference number as indicates the element of the chips **118** in FIG. **57** has a same material and spec as the element of the chips **118** illustrated in FIG. **57**. The chips **118***a* and **118***b* shown in FIG. **141**L are reverse arrangement of the chips **118** shown in FIG. **57**. Referring to FIG. **141**L, each of the chips **118***a* and **118***b* is provided with the semiconductor substrate **124**, the insulating rings **500***a*, the shallow trench isolation (STI) **500***b*, the semiconductor devices **13**, the passivation layer **21**, the dielectric layers **78**, **28**, **38** and **40**, the patterned metal layer **19**, the interconnection layer **17**, and the via plugs **17***a* and **19***a*. The steps of forming the insulating rings **500***a* in the ring-shaped trenches **305** in the semiconductor substrate **124** and forming the shallow trench isolation (STI) **500***b* in the shallow trenches **303** in the semiconductor substrate **124** can be referred to as the steps of forming the insulating rings **500***a* in the ring-shaped trenches **305** in the semiconductor substrate **58** and forming the shallow trench isolation (STI) **500***b* in the shallow trenches **303** in the semiconductor substrate **58** as illustrated in FIGS. **141**A-**141**H. The specifications of the shallow trenches **303**, the ring-shaped trenches **305**, the insulating rings **500***a*, and the shallow trench isolation (STI) **500***b* can be referred to as the specifications of the shallow trenches **303**, the ring-shaped trenches **305**, the insulating rings **500***a*, and the shallow trench isolation (STI) **500***b*, respectively, illustrated in FIGS. **141**A-**141**H.

[0431] In one case, the chip **118***a* may have different circuit designs from those of the chip **118***b*. Also, in another case, the chip **118***a* may have same circuit designs as those of the chip **118***b*. Alternatively, the chip **118***a* may have a different area (top surface) or size from that of the chip **118***b*. Also, in another case, the chip **118***a* may have a same area (top surface) or size as that of the chip **118***b*.

[0432] FIGS. **142**-**181** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **142**, multiple of the chips **68** illustrated in FIG. **141**J and the previously described dummy substrate(s) **62** are joined with the carrier **11** using the layer **22**, which can be referred to as the steps illustrated in FIGS. **1**-**9**.

[0433] Next, referring to FIG. **143**, an encapsulation/gap filling material **64**, such as polysilicon, silicon oxide, or a polymer, can be formed on a backside of the semiconductor substrate **58** of each chip **68**, on the dummy substrate(s) **62**, and in the gaps **4** and **8**, which can be referred to as the step illustrated in FIG. **10**.

[0434] Next, referring to FIG. **144**, the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** are ground or polished by a suitable process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, until all of the insulating rings **500***a* in the chips **68** have exposed bottom surfaces **500***s*, over which there are no portions of the semiconductor substrates **58**.

[0435] Accordingly, the semiconductor substrate **58** of each of the chips **68** can be thinned to a thickness T**1**, e.g, between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **68**, after the grinding or polishing process, the insulating rings **500***a* and the semiconductor substrate **58** may have the same thickness T**1**. Preferably, each of the chips **68**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. After the grinding or polishing process, the dummy substrate(s) **62** can be thinned to a thickness T**2**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **64** remaining in the gaps **4** and **8** may have a vertical thickness T**3**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the ground or polished surface(s) **62***s* of the dummy substrate(s) **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The ground or polished surface(s) **62***s* may be substantially coplanar with the ground or polished surface **58***s* of each chip **68**, with the ground or polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**, and with the exposed bottom surfaces **500***s* of the insulating rings **500***a*. In each chip **68**, a vertical distance D**14** between the ground or polished surface **58***s* of the semiconductor substrate **58** and the bottom of the shallow trench isolation **500***b* can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0436] Alternatively, FIGS. **145** and **146** show another technique to form the structure illustrated in FIG. **144**. Referring to FIG. **145**, after forming the structure illustrated in FIG. **142**, an encapsulation/gap filling material **64**, such as polysilicon or silicon oxide, can be formed on the backside of the semiconductor substrate **58** of each chip **68**, on the dummy substrate(s) **62**, and in the gaps **4** and **8**, and then a polymer **65**, such as polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or molding compound, can be formed on the encapsulation/gap filling material **64** and in the gaps **4** and **8**. The encapsulation/gap filling material **64** in the gaps **4** and **8** may have a vertical

IPR2026-00067
TSMC EX1019 Page 301

thickness T4, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers.

[0437] Next, referring to FIG. **146**, a mechanical grinding process can be performed, e.g., by using an abrasive or grinding pad with water to grind the polymer **65**, the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** until all of the polymer **65** is removed and until a predetermined vertical thickness T5 of the encapsulation/gap filling material **64** in the gaps **4** and **8** is reached. The predetermined vertical thickness T5 can be, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers. The abrasive or grinding pad can be provided with rough grit having an average grain size, e.g., between 0.5 and 15 micrometers for performing the mechanical grinding process. In the step, the semiconductor substrate **58** of each chip **68** has portions vertically over the insulating rings **500***a*. Thereafter, a chemical-mechanical-polishing (CMP) process can be performed, e.g., by using a polish pad with a slurry containing chemicals and a fine abrasive like silica with an average grain size, e.g., between 0.02 and 0.05 micrometers to polish the backside of the semiconductor substrate **58** of each chip **68**, the dummy substrate (s) **62**, and the encapsulation/gap filling material **64** in the gaps **4** and **8** until all of the insulating rings **500***a* in the chips **68** have the exposed bottom surfaces **500***s*, over which there are no portions of the semiconductor substrates **58**, as shown in FIG. **144**. Accordingly, after the grinding or polishing process, the semiconductor substrate **58** of each of the chips **68** can be thinned to the thickness T1 between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **68**, after the grinding or polishing process, the insulating rings **500***a* and the semiconductor substrate **58** may have the same thickness T1.

[0438] After the chemical-mechanical-polishing (CMP) process, the polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the polished surface(s) **62***s* of the dummy substrate(s) **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The polished surface(s) **62***s* may be substantially coplanar with the polished surface **58***s* of each chip **68**, with the polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**, and with the exposed bottom surfaces **500***s* of the insulating rings **500***a*. The polished surfaces **58***s*, **62***s* and **64***s* may have a micro-roughness, e.g., less than 20 nanometers. The chemical-mechanical-polishing (CMP) process, using a very fine abrasive like silica and a relatively weak chemical attack, will create the surfaces **58***s*, **62***s* and **64***s* almost without deformation and scratches, and this means that the chemical-mechanical-polishing (CMP) process is very well suited for the final polishing step, creating the clean surfaces **58***s*, **62***s* and **64***s*. Using the mechanical grinding process and the chemical-mechanical-polishing (CMP) process can be performed to create a very thin semiconductor substrate **10** of each chip **68**. Accordingly, after the chemical-mechanical-polishing (CMP) process, each of the chips **68** can be thinned to a thickness, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, the dummy substrate(s) **62** can be thinned to the thickness T2, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **64** in the gaps **4** and **8** can be thinned to the thickness T3, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers.

[0439] Referring to FIG. **147**, after forming the structure illustrated in FIG. **144**, the dielectric layer **60** illustrated in FIG. **14** is formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, on the exposed bottom surfaces **500***s* of the insulating rings **500***a* in the chips **68**, and on the surface **64***s* of the encapsulation/gap filling material **64**.

[0440] Next, referring to FIG. **148**, multiple through vias **170***v*, including through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, can be formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**, which can be referred to as the steps illustrated in FIG. **15**, but, in the embodiment, forming the through vias **170***v* (such as the vias **170***b*-**170***f*) in the chips **68** includes etching through the semiconductor substrates **58** enclosed by the insulating rings **500***a* in the chips **68**. Each of the through vias **170***v* in the chips **68** passes through one of the insulating rings **500***a* in the chips **68**.

[0441] For example, the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f* in one of the chips **68** pass through the insulating rings **500***a* in the one of the chips **68**. Forming the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f* includes a process of etching through the semiconductor substrate **58** enclosed by the insulating rings **500***a* in the one of the chips **68**. Accordingly, each of the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f* passes through the semiconductor substrate **58** of the one of the chips **68** and is enclosed by one of the insulating rings **500***a* in the one of the chips **68**. The semiconductor substrate **58** of the one of the chips **68** has portions on inner surfaces of the insulating rings **500***a* enclosing the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f*.

[0442] Each of the through vias **170***v*, such as the through via **170***a*, **170***b*, **170***c*, **170***d*, **170***e*, or **170***f*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers. For more detailed description about the through vias **170***v*, such as the through vias **170***a*-**170***f*, please refer to the illustration in FIG. **15**.

[0443] As shown in FIG. **148**, a supporter **801** provided by the dielectric or insulating layer **20**, the glue or silicon-oxide layer **22**, and the layers **24**, **42** and **44** of one of the chips **68** is between the conductive layer **18** of the carrier **11** and the interconnect or metal trace **35***a* in the interconnection layer **34** exposed by the through via **170***e* for the purpose of supporting the exposed interconnect or metal trace **35***a*. The supporter **801** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers.

[0444] FIG. **149** is a first example of a schematic top perspective view showing the through via **170***e*, the insulating ring **500***a* enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **148**. The schematic top perspective view shown in FIG. **149** is similar to the

schematic top perspective view shown in FIG. **16** except that the through via **170***e* shown in FIG. **149** is formed within one of the insulating rings **500***a* in one of the chips **68**. For more detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIGS. **148** and **149**, please refer to the illustration in FIGS. **15** and **16**.

[0445] FIG. **150** is a second example of a schematic top perspective view showing the through via **170***e*, the insulating ring **500***a* enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **148**. The schematic top perspective view shown in FIG. **150** is similar to the schematic top perspective view shown in FIG. **17** except that the through via **170***e* shown in FIG. **150** is formed within one of the insulating rings **500***a* in one of the chips **68**. For more detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIGS. **148** and **150**, please refer to the illustration in FIGS. **15** and **17**.

[0446] FIG. **151** is a third example of a schematic top perspective view showing the through via **170***e*, the insulating ring **500***a* enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **148**. The schematic top perspective view shown in FIG. **151** is similar to the schematic top perspective view shown in FIG. **18** except that the through via **170***e* shown in FIG. **151** is formed within one of the insulating rings **500***a* in one of the chips **68**. For more detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIGS. **148** and **151**, please refer to the illustration in FIGS. **15** and **18**.

[0447] FIG. **152** is a fourth example of a schematic top perspective view showing the through via **170***e*, the insulating ring **500***a* enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **148**. The schematic top perspective view shown in FIG. **152** is similar to the schematic top perspective view shown in FIG. **16**A except that the through via **170***e* shown in FIG. **152** is formed within one of the insulating rings **500***a* in one of the chips **68**. For more detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIG. **152**, please refer to the illustration in FIG. **16**A.

[0448] Referring to FIG. **153**, after forming the structure illustrated in FIG. **148**, a photoresist layer **168** is formed on the dielectric layer **60**, and multiple openings **168***a* in the photoresist layer **168** expose the dielectric layer **60** and the through vias **170***v*. The photoresist layer **168** may have a thickness, e.g., between 0.5 and 30 micrometers.

[0449] Next, referring to FIG. **154**, multiple trenches **60***t* are formed in the dielectric layer **60** by etching the dielectric layer **60** under the openings **168***a* to a depth D**3**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers, using, e.g., an anisotropic plasma etching process. After the etching process, the dielectric layer **60** under the trenches **60***t* has a remaining thickness T**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0450] Alternatively, an etching-stop technique may be applied to the process of forming the trenches **60***t* in the dielectric layer **60**. In this case, the dielectric layer **60** may include a first silicon-oxide layer on the surfaces **58***s*, **62***s*, **64***s* and **500***s* shown in FIG. **144**, a silicon-oxynitride layer, used as an etch stop layer, on the first silicon-oxide layer, and a second silicon-oxide layer having a thickness, e.g., between 0.1 and 5 micrometers or between 0.3 and 1.5 micrometers on the silicon-oxynitride layer. The trenches **60***t* can be formed in the dielectric layer **60** by etching the second silicon-oxide layer of the dielectric layer **60** under the openings **168***a* in the photoresist layer **168** until the silicon-oxynitride layer of the dielectric layer **60** is exposed by the openings **168***a*. Accordingly, the trenches **60***t* are formed in the second silicon-oxide layer of the dielectric layer **60**, and the remaining dielectric layer **60**, composed of the silicon-oxynitride layer and the first silicon-oxide layer, under the trenches **60***t* has a thickness T**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers.

[0451] Next, referring to FIG. **155**, the photoresist layer **168** is removed by using, e.g., an organic chemical. The trenches **60***t* formed in the dielectric layer **60** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. FIG. **156** is an example of a schematic top perspective view showing the trenches **60***t* and the through vias **170***v* shown in FIG. **155**, and FIG. **155** is a cross-sectional view cut along the line D-D shown in FIG. **156**.

[0452] Alternatively, the trenches **60***t* illustrated in FIG. **155** can be formed in the dielectric layer **60** before the through vias **170***v* illustrated in FIG. **148** are formed in the chips **68** and in the dummy substrate(s) **62**. Specifically, after the dielectric layer **60** is formed on the surfaces **58***s*, **62***s*, **64***s* and **500***s* as shown in FIG. **147**, the trenches **60***t* illustrated in FIG. **155** are formed in the dielectric layer **60**, and then the through vias **170***v* illustrated in FIG. **148** are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**.

[0453] Alternatively, referring to FIG. **155**A, the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* as shown in FIG. **155** can be formed by the following steps. After forming the structure illustrated in FIG. **144**, an insulating layer **60***a*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness C**1**, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.15 and 2 micrometers, is formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, on the exposed bottom surfaces **500***s* of the insulating rings **500***a* in the chips **68**, and on the surface **64***s* of the encapsulation/gap filling material **64** as shown in FIG. **144**.

[0454] Next, a polymer layer **60***b*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO), is formed on the insulating layer **60***a* using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, an exposure process and a development process can be employed to form the trenches **60***t*, exposing the insulating layer **60***a*, in the polymer layer **60***b*. A 1X stepper or 1X contact aligner can be used to expose the polymer layer **60***b* during the exposure process. Next, the polymer layer **60***b* is cured or heated at a temperature between 150 degrees centigrade and 400 degrees centigrade, and preferably between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **60***b* after being cured or heated has a thickness C**2**, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0455] Next, a photoresist layer is formed on the insulating layer **60***a* exposed by the trenches **60***t* and on the polymer

IPR2026-00067
TSMC EX1019 Page 303

layer **60***b*, and multiple openings in the photoresist layer expose the insulating layer **60***a* at bottoms of the trenches **60***t*. Next, the insulating layer **60***a* under the openings in the photoresist layer is removed using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **62** under the openings in the photoresist layer and the chips **68** under the openings in the photoresist layer are etched away until predetermined regions of the layers **26** and **34** in the chips **68** and predetermined regions of the conductive layer **18** in the carrier **11** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **170***v*, including the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**. The specifications of the through vias **170***v* and the supporter **801** shown in FIG. **155**A can be referred to as the specifications of the through vias **170***v* and the supporter **801**, respectively, illustrated in FIGS. **148-152**.

[0456] Accordingly, using the above-mentioned steps, the above-mentioned dielectric layer **60** also can be provided with the insulating layer **60***a* and the polymer layer **60***b* on the insulating layer **60***a*. The trenches **60***t* in the polymer layer **60***b* expose the insulating layer **60***a* and are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The through vias **170***v* are formed under the trenches **60***t*. Also, FIG. **156** can be an example of a schematic top perspective view showing the trenches **60***t* and the through vias **170***v* shown in FIG. **155**A, and FIG. **155**A also can be a cross-sectional view cut along the line D-D shown in FIG. **156**.

[0457] Referring to FIG. **157**, after forming the structure illustrated in FIG. **155** or in FIG. **155**A, an adhesion/barrier layer **52** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, is formed on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on sidewalls of the through vias **170***v*, on sidewalls and bottoms of the trenches **60***t* (or on sidewalls of the trenches **60***t* in the polymer layer **60***b* and on a top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*), and on the interconnect or metal trace **35***a* that is on the supporter **801**. The adhesion/barrier layer **52** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **54** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, is formed on the adhesion/barrier layer **52** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a conduction layer **56** is formed on the seed layer **54** using a suitable process, such as electroplating process. The specifications of the adhesion/barrier layer **52**, the seed layer **54**, and the conduction layer **56** shown in FIG. **157** can be referred to as the specifications of the adhesion/barrier layer **52**, the seed layer **54**, and the conduction layer **56** as illustrated in FIG. **25**, respectively.

[0458] Next, referring to FIG. **158**, the layers **52**, **54** and **56** are ground or polished by using a suitable process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, until the dielectric layer **60** has an exposed top surface **60***s*, over which there are no portions of the layers **52**, **54** and **56**, and the layers **52**, **54** and **56** outside the trenches **60***t* are removed.

[0459] Accordingly, the exposed top surface **60***s* of the dielectric layer **60** can be substantially coplanar with the ground or polished surface **56***s* of the conduction layer **56** in the trenches **60***t*, and the surfaces **56***s* and **60***s* can be substantially flat. The adhesion/barrier layer **52** and the seed layer **54** are at sidewalls and a bottom of the conduction layer **56** in the trenches **60***t*, and the sidewalls and the bottom of the conduction layer **56** in the trenches **60***t* are covered by the adhesion/barrier layer **52** and the seed layer **54**.

[0460] After the layers **52**, **54** and **56** are ground or polished, the dielectric layer **60** has a thickness, between the exposed top surface **60***s* and the surface **58***s* or **62***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **147-155**. Alternatively, after the layers **52**, **54** and **56** are ground or polished, the polymer layer **60***b* of the dielectric layer **60** has a thickness, between the exposed top surface **60***s* of the polymer layer **60***b* and the top surface of the insulating layer **60***a*, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layer **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **155**A.

[0461] In a first alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t* (or on the sidewalls of the trenches **60***t* in the polymer layer **60***b* and on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*), on the sidewalls of the through vias **170***v*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **147-155**. Alternatively, the electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layers **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **155**A.

[0462] In a second alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a

IPR2026-00067
TSMC EX1019 Page 304

tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t* (or on the sidewalls of the trenches **60***t* in the polymer layer **60***b* and on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*), on the sidewalls of the through vias **170***v*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **147-155**. Alternatively, the electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layers **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **155**A.

[0463] In a third alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t* (or on the sidewalls of the trenches **60***t* in the polymer layer **60***b* and on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*), on the sidewalls of the through vias **170***v*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **147-155**. Alternatively, the electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layers **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **155**A.

[0464] After the layers **52**, **54** and **56** are ground or polished, the layers **52**, **54** and **56** in the trenches **60***t* compose multiple metal interconnects (or damascene metal traces) **1**, including metal interconnects (or damascene metal traces) **1***a* and **1***b*, in the trenches **60***t*. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f* as shown in FIG. **148**, respectively. The metal plug **5***a* is formed in the dummy substrate **62**, and the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* are formed in the same chip **68**. These metal plugs **5***p* formed in the chips **68** and in the dummy substrate(s) **62** can connect the metal interconnects **1** and the semiconductor devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**. The metal interconnects **1**, such as **1***a* and **1***b*, in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 1 and 3 micrometers. The supporter **801** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **801** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***e*.

[0465] Each of the metal plugs **5***p* in the chips **68** passes through one of the insulating rings **500***a* in the chips **68**. For example, the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in one of the chips **68** pass through the insulating rings **500***a* in the one of the chips **68**. Specifically, each of the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* passes through the semiconductor substrate **58** of the one of the chips **68** and is enclosed by one of the insulating rings **500***a* in the one of the chips **68**. The semiconductor substrate **58** of the one of the chips **68** has portions on inner surfaces of the insulating rings **500***a* enclosing the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f*. For more detailed description about the metal plugs **5***p* (including the metal plugs **5***a*-**5***f*) and the metal interconnects **1** (including the metal interconnects **1***a* and **1***b*) shown in FIG. **158**, please refer to the illustration in FIG. **26**.

[0466] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0467] Referring to FIG. **159**, after forming the structure illustrated in FIG. **158**, the insulating or dielectric layer **66** illustrated in FIG. **27** is formed on the ground or polished surface **56***s* of the conduction layer **56** and on the exposed top surface **60***s* of the dielectric layer **60**. Next, multiple chips **72**, each of which is like the chip **72***a* or **72***b* illustrated in FIG. **141**K, and the previously described dummy substrate(s) **165** are placed over the layer **116**, which can be referred to as the steps illustrated in FIGS. **28-35**. The arrangement of placing the chips **72** and the dummy substrate(s) **165** over the insulating or dielectric layer **66**, in the embodiment, can be referred to as that of placing the chips **72** and the dummy substrate(s) **165** over the insulating or dielectric layer **66** as illustrated in FIG. **34** or **35**.

[0468] Next, referring to FIG. **160**, an encapsulation/gap filling material **98** is formed on a backside of the semiconductor substrate **96** of each chip **72**, on the dummy substrate (s) **165**, and in the gaps **4***a* and **8***a*. Next, the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** are ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching, until

all of the insulating rings **500***a* in the chips **72** have exposed bottom surfaces **500***t*, over which there are no portions of the semiconductor substrates **96**. The steps of forming the encapsulation/gap filling material **98** and grinding or polishing the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** illustrated in FIG. **160** can be referred to as the steps of forming the encapsulation/gap filling material **64** and grinding or polishing the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** as illustrated in FIGS. **143-146**. The encapsulation/gap filling material **98** can be polysilicon, silicon oxide, or a polymer.

[0469] Accordingly, the semiconductor substrate **96** of each of the chips **72** can be thinned to a thickness T**8**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **72**, after the grinding or polishing process, the insulating rings **500***a* and the semiconductor substrate **96** may have the same thickness T**8**. Preferably, each of the chips **72**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers.

[0470] After the grinding or polishing process, the dummy substrate(s) **165** can be thinned to a thickness T**9**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **98** remaining in the gaps **4***a* and **8***a* may have a vertical thickness T**10**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **96***s* of the semiconductor substrate **96**, at the backside of each chip **72**, and the ground or polished surface(s) **165***s* of the dummy substrate(s) **165** can be substantially flat and not covered by the encapsulation/gap filling material **98**. The ground or polished surface(s) **165***s* may be substantially coplanar with the ground or polished surface **96***s* of each chip **72**, with the ground or polished surface **98***s* of the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a*, and with the exposed bottom surfaces **500***t* of the insulating rings **500***a* in the chips **72**. In each chip **72**, a vertical distance D**15** between the ground or polished surface **96***s* of the semiconductor substrate **96** and the bottom of the shallow trench isolation **500***b* can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0471] Referring to FIG. **161**, after forming the structure illustrated in FIG. **160**, the dielectric layer **88** illustrated in FIG. **40** is formed on the surface **96***s* of the semiconductor substrate **96** of each chip **72**, on the surface(s) **165***s* of the dummy substrate(s) **165**, on the exposed bottom surfaces **500***t* of the insulating rings **500***a* in the chips **72**, and on the surface **98***s* of the encapsulation/gap filling material **98**.

[0472] Next, referring to FIG. **162**, multiple through vias **164***v*, including through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, are formed in the chips **72** and in the dummy substrate (s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**, which can be referred to as the steps illustrated in FIG. **41**, but, in the embodiment, forming the through vias **164***v* (such as the vias **164***b*-**164***e*) in the chips **72** includes etching through the semiconductor substrates **96** enclosed by the insulating rings **500***a* in the chips **72**. Each of the through vias **164***v* in the chips **72** passes through one of the insulating rings **500***a* in the chips **72**. For example, the through vias **164***b* and **164***c* in the left one of the chips **72** pass through the insulating rings **500***a* in the left one of the chips **72**, and the through vias **164***d* and **164***e* in the middle one of the chips **72** pass through the insulating rings **500***a* in the middle one of the chips **72**.

[0473] Forming the through vias **164***b*, **164***c*, **164***d* and **164***e* includes a process of etching through the semiconductor substrates **96** enclosed by the insulating rings **500***a*. Particularly, forming the through via **164***c* or **164***e* includes a process of etching away the whole portion, enclosed by one of the insulating rings **500***a*, of the semiconductor substrate **96**. Accordingly, the through vias **164***b* and **164***c* pass through the semiconductor substrate **96** in the left one of the chips **72** and are enclosed by the insulating rings **500***a* in the left one of the chips **72**, and the through vias **164***d* and **164***e* pass through the semiconductor substrate **96** in the middle one of the chips **72** and are enclosed by the insulating rings **500***a* in the middle one of the chips **72**. The semiconductor substrate **96** of the left one of the chips **72** has a portion on an inner surface of the insulating ring **500***a* enclosing the through via **164***b* in the left one of the chips **72**, and the semiconductor substrate **96** of the middle one of the chips **72** has a portion on an inner surface of the insulating ring **500***a* enclosing the through via **164***d* in the middle one of the chips **72**. The insulating ring **500***a* enclosing the through via **164***c* is at the sidewall of the through via **164***c* and exposed by the through via **164***c*, and the insulating ring **500***a* enclosing the through via **164***e* is at the sidewall of the through via **164***e* and exposed by the through via **164***e*.

[0474] Each of the through vias **164***v*, such as the through via **164***a*, **164***b*, **164***c*, **164***d*, or **164***e*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers. For more detailed description about the through vias **164***v*, such as the through vias **164***a*-**164***e*, please refer to the illustration in FIG. **41**.

[0475] As shown in FIG. **162**, a supporter **802** provided by the insulating or dielectric layer **66**, the layer **116** and the layers **74**, **82** and **108** of the middle one of the chips **72** is between the conduction layer **56** of the metal interconnect **1***b* and the interconnect or metal trace **55***a* in the interconnection layer **106** exposed by the through via **164***e* for the purpose of supporting the exposed interconnect or metal trace **55***a*. The supporter **802** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers.

[0476] FIG. **163** is a first example of a schematic top perspective view showing the through via **164***e*, the insulating ring **500***a* enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **162**. The schematic top perspective view shown in FIG. **163** is similar to the schematic top perspective view shown in FIG. **42** except that the through via **164***e* shown in FIG. **163** is formed within one of the insulating rings **500***a* in the middle one of the chips **72**. For more detailed description about the through via **164***e* and

the interconnect or metal trace **55***a* as shown in FIGS. **162** and **163**, please refer to the illustration in FIGS. **41** and **42**.

[0477] FIG. **164** is a second example of a schematic top perspective view showing the through via **164***e*, the insulating ring **500***a* enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **162**. The schematic top perspective view shown in FIG. **164** is similar to the schematic top perspective view shown in FIG. **43** except that the through via **164***e* shown in FIG. **164** is formed within one of the insulating rings **500***a* in the middle one of the chips **72**. For more detailed description about the through via **164***e* and the interconnect or metal trace **55***a* as shown in FIGS. **162** and **164**, please refer to the illustration in FIGS. **41** and **43**.

[0478] FIG. **165** is a third example of a schematic top perspective view showing the through via **164***e*, the insulating ring **500***a* enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **162**. The schematic top perspective view shown in FIG. **165** is similar to the schematic top perspective view shown in FIG. **44** except that the through via **164***e* shown in FIG. **165** is formed within one of the insulating rings **500***a* in the middle one of the chips **72**. For more detailed description about the through via **164***e* and the interconnect or metal trace **55***a* as shown in FIGS. **162** and **165**, please refer to the illustration in FIGS. **41** and **44**.

[0479] FIG. **166** is a fourth example of a schematic top perspective view showing the through via **164***e*, the insulating ring **500***a* enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **162**. The schematic top perspective view shown in FIG. **166** is similar to the schematic top perspective view shown in FIG. **42**A except that the through via **164***e* shown in FIG. **166** is formed within one of the insulating rings **500***a* in the middle one of the chips **72**. For more detailed description about the through via **164***e* and the interconnect or metal trace **55***a* as shown in FIG. **166**, please refer to the illustration in FIG. **42**A.

[0480] Referring to FIG. **167**, after forming the structure illustrated in FIG. **162**, multiple trenches **88***t* are formed in the dielectric layer **88**. The trenches **88***t* in the dielectric layer **88** have a depth D**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers. The dielectric layer **88** under the trenches **88***t* has a remaining thickness T**13**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers. The steps of forming the trenches **88***t* in the dielectric layer **88** can be referred to as the steps of forming the trenches **60***t* in the dielectric layer **60** as illustrated in FIGS. **153-155**. The trenches **88***t* formed in the dielectric layer **88** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. FIG. **168** is an example of a schematic top perspective view showing the trenches **88***t* and the through vias **164***v* shown in FIG. **162**, and FIG. **162** is a cross-sectional view cut along the line H-H shown in FIG. **168**.

[0481] Alternatively, the trenches **88***t* illustrated in FIG. **167** can be formed in the dielectric layer **88** before the through vias **164***v* illustrated in FIG. **162** are formed in the chips **72** and in the dummy substrate(s) **165**. Specifically, after the dielectric layer **88** is formed on the surfaces **96***s*, **98***s*, **165***s* and **500***t* as shown in FIG. **161**, the trenches **88***t* illustrated in FIG. **167** are formed in the dielectric layer **88**, and then the through vias **164***v* illustrated in FIG. **162** are formed in the chips **72** and in the dummy substrate(s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**.

[0482] Alternatively, referring to FIG. **167**A, the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* as shown in FIG. **167** can be formed by the following steps. After forming the structure illustrated in FIG. **160**, an insulating layer **88***a*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness C**3**, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.15 and 2 micrometers, is formed on the surface **96***s* of the semiconductor substrate **96** of each chip **72**, on the surface(s) **165***s* of the dummy substrate(s) **165**, on the exposed bottom surfaces **500***t* of the insulating rings **500***a* in the chips **72**, and on the surface **98***s* of the encapsulation/gap filling material **98** as shown in FIG. **160**.

[0483] Next, a polymer layer **88***b*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO), is formed on the insulating layer **88***a* using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, an exposure process and a development process can be employed to form the trenches **88***t*, exposing the insulating layer **88***a*, in the polymer layer **88***b*. A 1X stepper or 1X contact aligner can be used to expose the polymer layer **88***b* during the exposure process. Next, the polymer layer **88***b* is cured or heated at a temperature between 150 degrees centigrade and 400 degrees centigrade, and preferably between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **88***b* after being cured or heated has a thickness C**4**, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0484] Next, a photoresist layer is formed on the insulating layer **88***a* exposed by the trenches **88***t* and on the polymer layer **88***b*, and multiple openings in the photoresist layer expose the insulating layer **88***a* at bottoms of the trenches **88***t*. Next, the insulating layer **88***a* under the openings in the photoresist layer is removed using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **165** under the openings in the photoresist layer and the chips **72** under the openings in the photoresist layer are etched away until predetermined regions of the layers **106** and **114** in the chips **72** and predetermined regions of the conduction layer **56** of the metal interconnects **1** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **164***v*, including the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, are formed in the chips **72** and in the dummy substrate(s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **106** and **114** of the chips **72**. The specifications of the through vias **164***v* and the supporter **802** shown in FIG. **167**A can be referred to as the specifications of the through vias **164***v* and the supporter **802**, respectively, illustrated in FIGS. **162-166**.

[0485] Accordingly, using the above-mentioned steps, the above-mentioned dielectric layer **88** also can be provided with the insulating layer **88***a* and the polymer layer **88***b* on the insulating layer **88***a*. The trenches **88***t* in the polymer layer **88***b* expose the insulating layer **88***a* and are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The through vias **164***v* are formed under the trenches **88***t*. Also, FIG. **168** can be an example of a schematic top perspective view showing the trenches **88***t*

IPR2026-00067
TSMC EX1019 Page 307

and the through vias **164***v* shown in FIG. **167**A, and FIG. **167**A also can be a cross-sectional view cut along the line H-H shown in FIG. **168**.

[0486] Referring to FIG. **169**, after forming the structure illustrated in FIG. **167** or in FIG. **167**A, multiple metal interconnects (or damascene metal traces) **2**, including metal interconnects (or damascene metal traces) **2***a* and **2***b*, are formed in the trenches **88***t*, and multiple metal plugs (or metal vias) **6***p* are formed in the through vias **164***v*. The metal plugs **6***p* include metal plugs (or metal vias) **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, respectively. The metal plug **6***a* is formed in the dummy substrate **165**, the metal plugs **6***b* and **6***c* are formed in the left one of the chips **72**, and the metal plugs **6***d* and **6***e* are formed in the middle one of the chips **72**. The supporter **802** and the interconnect or metal trace **55***a*, in the interconnection layer **106**, on the supporter **802** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **106** is positioned, of the metal plug **6***e*.

[0487] The metal interconnects **2** in the trenches **88***t* and the metal plugs **6***p* in the through vias **164***v* can be formed by the following steps. First, the adhesion/barrier layer **92** illustrated in FIG. **51** is formed on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on sidewalls of the through vias **164***v*, on sidewalls and bottoms of the trenches **88***t* (or on sidewalls of the trenches **88***t* in the polymer layer **88***b* and on a top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), and on the interconnect or metal trace **55***a* that is on the supporter **802** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, the seed layer **94** illustrated in FIG. **51** is formed on the adhesion/barrier layer **92**, in the through vias **164***v*, and in the trenches **88***t* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, the conduction layer **86** illustrated in FIG. **51** is formed on the seed layer **94**, in the through vias **164***v*, and in the trenches **88***t* using a suitable process, such as electroplating process. Next, the layers **92**, **94** and **86** are ground or polished by using a suitable process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, until the dielectric layer **88** has an exposed top surface **88***s*, over which there are no portions of the layers **92**, **94** and **86**, and the layers **92**, **94** and **86** outside the trenches **88***t* are removed. Accordingly, the layers **92**, **94** and **86** in the trenches **88***t* compose the metal interconnects **2**, including the metal interconnects **2***a* and **2***b*, in the trenches **88***t*. The layers **92**, **94** and **86** in the through vias **164***v* compose the metal plugs **6***p* in the through vias **164***v*, including the metal plugs **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, respectively. The adhesion/barrier layer **92** and the seed layer **94** are at sidewalls and a bottom of the conduction layer **86** in the trenches **88***t*, and the sidewalls and the bottom of the conduction layer **86** in the trenches **88***t* are covered by the adhesion/barrier layer **92** and the seed layer **94**.

[0488] In a first alternative, after the layers **92**, **94** and **86** are ground or polished, the adhesion/barrier layer **92** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t* (or on the sidewalls of the trenches **88***t* in the polymer layer **88***b* and on the top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewalls of the through vias **164***v*, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer, in the trenches **88***t*, and in the through vias **164***v*. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **161-167**. Alternatively, the electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **88** composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **167**A.

[0489] In a second alternative, after the layers **92**, **94** and **86** are ground or polished, the adhesion/barrier layer **92** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t* (or on the sidewalls of the trenches **88***t* in the polymer layer **88***b* and on the top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewalls of the through vias **164***v*, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer, in the trenches **88***t*, and in the through vias **164***v*. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **161-167**. Alternatively, the electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **88** composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **167**A.

[0490] In a third alternative, after the layers **92**, **94** and **86** are ground or polished, the adhesion/barrier layer **92** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as

between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t* (or on the sidewalls of the trenches **88***t* in the polymer layer **88***b* and on the top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewalls of the through vias **164***v*, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer, in the trenches **88***t*, and in the through vias **164***v*. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **161-167**. Alternatively, the electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **88** composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **167**A.

[0491] The exposed top surface **88***s* of the dielectric layer **88** can be substantially coplanar with the ground or polished surface **86***s* of the conduction layer **86** in the trenches **88***t*, and the surfaces **86***s* and **88***s* can be substantially flat. After the layers **92**, **94** and **86** are ground or polished, the dielectric layer **88** may have a thickness, between the exposed top surface **88***s* and the surface **96***s* or **165***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **161-167**. Alternatively, after the layers **92**, **94** and **86** are ground or polished, the polymer layer **88***b* of the dielectric layer **88** may have a thickness, between the exposed top surface **88***s* of the polymer layer **88***b* and the top surface of the insulating layer **88***a*, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **88** composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **167**A.

[0492] Each of the metal plugs **6***p* in the chips **72** passes through one of the insulating rings **500***a* in the chips **72**. For example, the metal plugs **6***b* and **6***c* in the left one of the chips **72** pass through the insulating rings **500***a* in the left one of the chips **72**, and the metal plugs **6***d* and **6***e* in the middle one of the chips **72** pass through the insulating rings **500***a* in the middle one of the chips **72**. Specifically, each of the metal plugs **6***b* and **6***c* passes through the semiconductor substrate **96** of the left one of the chips **72** and is enclosed by one of the insulating rings **500***a* in the left one of the chips **72**, and each of the metal plugs **6***d* and **6***e* passes through the semiconductor substrate **96** of the middle one of the chips **72** and is enclosed by one of the insulating rings **500***a* in the middle one of the chips **72**. The semiconductor substrate **96** of the left one of the chips **72** has a portion on an inner surface of the insulating ring **500***a* enclosing the metal plug **6***b*, and the semiconductor substrate **96** of the middle one of the chips **72** has a portion on an inner surface of the insulating ring **500***a* enclosing the metal plug **6***d*. The insulating ring **500***a* enclosing the metal plug **6***c* is at the sidewall of the metal plug **6***c* and contacts the metal plug **6***c*, and the insulating ring **500***a* enclosing the metal plug **6***e* is at the sidewall of the metal plug **6***e* and contacts the metal plug **6***e*. For more detailed description about the metal plugs **6***p* (including the metal plugs **6***a*-**6***e*) and the metal interconnects **2** (including the metal interconnects **2***a* and **2***b*) shown in FIG. **169**, please refer to the illustration in FIG. **52**.

[0493] Alternatively, the element **72** not only can indicate a chip, but also can indicate a wafer. When the element **72** is a wafer, the element **68** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0494] Referring to FIG. **170**, after forming the structure illustrated in FIG. **169**, the insulating or dielectric layer **120** illustrated in FIG. **53** is formed on the ground or polished surface **86***s* of the conduction layer **86** and on the exposed top surface **88***s* of the dielectric layer **88**. Next, multiple chips **118**, each of which is like the chip **118***a* or **118***b* illustrated in FIG. **141**L, and the previously described dummy substrate(s) **158** are placed over the layer **140**, which can be referred to as the steps illustrated in FIGS. **54-59**. The arrangement of placing the chips **118** and the dummy substrate(s) **158** over the insulating or dielectric layer **120**, in the embodiment, can be referred to as that of placing the chips **118** and the dummy substrate(s) **158** over the insulating or dielectric layer **120** as illustrated in FIG. **58** or **59**.

[0495] Next, referring to FIG. **171**, an encapsulation/gap filling material **138** is formed on a backside of the semiconductor substrate **124** of each chip **118**, on the dummy substrate(s) **158**, and in the gaps **4***b* and **8***b*. Next, the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158** are ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching, until all of the insulating rings **500***a* in the chips **118** have exposed bottom surfaces **500***u*, over which there are no portions of the semiconductor substrates **124**. The steps of forming the encapsulation/gap filling material **138** and grinding or polishing the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158** illustrated in FIG. **171** can be referred to as the steps of forming the encapsulation/gap filling material **64** and grinding or polishing the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** as illustrated in FIGS. **143-146**. The encapsulation/gap filling material **138** can be polysilicon, silicon oxide, or a polymer.

[0496] Accordingly, the semiconductor substrate **124** of each of the chips **118** can be thinned to a thickness T**15**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **118**, after the grinding or polishing process, the insulating rings **500***a* and the semiconductor substrate **124** may have the same thickness T**15**. Preferably, each of the chips **118**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105

IPR2026-00067
TSMC EX1019 Page 309

micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers.

[0497] After the grinding or polishing process, the dummy substrate(s) **158** can be thinned to a thickness T**16**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **138** remaining in the gaps **4***b* and **8***b* may have a vertical thickness T**17**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **124***s* of the semiconductor substrate **124**, at the backside of each chip **118**, and the ground or polished surface(s) **158***s* of the dummy substrate(s) **158** can be substantially flat and not covered by the encapsulation/gap filling material **138**. The ground or polished surface(s) **158***s* may be substantially coplanar with the ground or polished surface **124***s* of each chip **118**, with the ground or polished surface **138***s* of the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b*, and with the exposed bottom surfaces **500***u* of the insulating rings **500***a* in the chips **118**. In each chip **118**, a vertical distance D**16** between the ground or polished surface **124***s* of the semiconductor substrate **124** and the bottom of the shallow trench isolation **500***b* can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0498] Referring to FIG. **172**, after forming the structure illustrated in FIG. **171**, the dielectric layer **139** illustrated in FIG. **64** is formed on the surface **124***s* of the semiconductor substrate **124** of each chip **118**, on the surface(s) **158***s* of the dummy substrate(s) **158**, on the exposed bottom surfaces **500***u* of the insulating rings **500***a* in the chips **118**, and on the surface **138***s* of the encapsulation/gap filling material **138**.

[0499] Next, referring to FIG. **173**, multiple through vias **156***v*, including through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**, which can be referred to as the steps illustrated in FIG. **65**, but, in the embodiment, forming the through vias **156***v* (such as the vias **156***b*-**156***f*) in the chips **118** includes etching through the semiconductor substrates **124** enclosed by the insulating rings **500***a* in the chips **118**. Each of the through vias **156***v* in the chips **118** passes through one of the insulating rings **500***a* in the chips **118**. For example, the through vias **156***b*, **156***c* and **156***d* in the left one of the chips **118** pass through the insulating rings **500***a* in the left one of the chips **118** and the through vias **156***e* and **156***f* in the middle one of the chips **118** pass through the insulating rings **500***a* in the middle one of the chips **118**.

[0500] Forming the through vias **156***b*, **156***c*, **156***d*, **156***e* and **156***f* includes a process of etching through the semiconductor substrates **124** enclosed by the insulating rings **500***a*. Particularly, forming the through via **156***b* includes a process of etching away the whole portion, enclosed by one of the insulating rings **500***a*, of the semiconductor substrate **124**. Accordingly, the through vias **156***b*, **156***c* and **156***d* pass through the semiconductor substrate **124** in the left one of the chips **118** and are enclosed by the insulating rings **500***a* in the left one of the chips **118**, and the through vias **156***e* and **156***f* pass through the semiconductor substrate **124** in the middle one of the chips **118** and are enclosed by the insulating rings **500***a* in the middle one of the chips **118**. The semiconductor substrate **124** of the left one of the chips **118** has portions on inner surfaces of the insulating rings **500***a* enclosing the through vias **156***c* and **156***d* in the left one of the chips **118**, and the semiconductor substrate **124** of the middle one of the chips **118** has portions on inner surfaces of the insulating rings **500***a* enclosing the through vias **156***e* and **156***f* in the middle one of the chips **118**. The insulating ring **500***a* enclosing the through via **156***b* is at the sidewall of the through via **156***b* and exposed by the through via **156***b*. The insulating ring **500***a* enclosing the through via **156***d* has a portion at the sidewall of the through via **156***d* and exposed by the through via **156***d*. The insulating ring **500***a* enclosing the through via **156***f* has a portion at the sidewall of the through via **156***f* and exposed by the through via **156***f*.

[0501] Each of the through vias **156***v*, such as the through via **156***a*, **156***b*, **156***c*, **156***d*, **156***e*, or **156***f*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers. For more detailed description about the through vias **156***v*, such as the through vias **156***a*-**156***f*, please refer to the illustration in FIG. **65**.

[0502] As shown in FIG. **173**, a supporter **803** provided by the insulating or dielectric layer **120**, the layer **140**, and the layers **21**, **78** and **28** of the middle one of the chips **118** is between the conduction layer **86** of the metal interconnect **2***b* and the interconnect or metal trace **75***a* in the interconnection layer **17** exposed by the through via **156***e* for the purpose of supporting the exposed interconnect or metal trace **75***a*. The supporter **803** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers.

[0503] FIG. **174** is a first example of a schematic top perspective view showing the through via **156***e*, one of the insulating rings **500***a* in the middle one of the chips **118**, and the interconnect or metal trace **75***a* in the middle one of the chips **118** as illustrated in FIG. **173**. The schematic top perspective view shown in FIG. **174** is similar to the schematic top perspective view shown in FIG. **66** except that the through via **156***e* shown in FIG. **174** is formed within one of the insulating rings **500***a*. For more detailed description about the through via **156***e* and the interconnect or metal trace **75***a* as shown in FIGS. **173** and **174**, please refer to the illustration in FIGS. **65** and **66**.

[0504] FIG. **175** is a second example of a schematic top perspective view showing the through via **156***e*, one of the insulating rings **500***a* in the middle one of the chips **118**, and the interconnect or metal trace **75***a* as illustrated in FIG. **173**. The schematic top perspective view shown in FIG. **175** is similar to the schematic top perspective view shown in FIG. **67** except that the through via **156***e* shown in FIG. **175** is formed within one of the insulating rings **500***a*. For more detailed description about the through via **156***e* and the interconnect or metal trace **75***a* as shown in FIGS. **173** and **175**, please refer to the illustration in FIGS. **65** and **67**.

[0505] FIG. **176** is a third example of a schematic top perspective view showing the through via **156***e*, one of the insulating rings **500***a* in the middle one of the chips **118**, and the interconnect or metal trace **75***a* as illustrated in FIG. **173**. The schematic top perspective view shown in FIG. **176** is similar to the schematic top perspective view shown in FIG. **68**

except that the through via **156***e* shown in FIG. **176** is formed within one of the insulating rings **500***a*. For more detailed description about the through via **156***e* and the interconnect or metal trace **75***a* as shown in FIGS. **173** and **176**, please refer to the illustration in FIGS. **65** and **68**.

[0506] FIG. **177** is a fourth example of a schematic top perspective view showing the through via **156***e*, one of the insulating rings **500***a* in the middle one of the chips **118**, and the interconnect or metal trace **75***a* as illustrated in FIG. **173**. The schematic top perspective view shown in FIG. **177** is similar to the schematic top perspective view shown in FIG. **66**A except that the through via **156***e* shown in FIG. **177** is formed within one of the insulating rings **500***a*. For more detailed description about the through via **156***e* and the interconnect or metal trace **75***a* as shown in FIG. **177**, please refer to the illustration in FIG. **66**A.

[0507] Referring to FIG. **178**, after forming the structure illustrated in FIG. **173**, multiple trenches **139***t* are formed in the dielectric layer **139**. The trenches **139***t* in the dielectric layer **139** have a depth D**9**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers. The dielectric layer **139** under the trenches **139***t* has a remaining thickness T**20**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers. The steps of forming the trenches **139***t* in the dielectric layer **139** can be referred to as the steps of forming the trenches **60***t* in the dielectric layer **60** as illustrated in FIGS. **153**-**155**. The trenches **139***t* formed in the dielectric layer **139** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. FIG. **179** is an example of a schematic top perspective view showing the trenches **139***t* and the through vias **156***v* shown in FIG. **178**, and FIG. **178** is a cross-sectional view cut along the line K-K shown in FIG. **179**.

[0508] Alternatively, the trenches **139***t* illustrated in FIG. **178** can be formed in the dielectric layer **139** before the through vias **156***v* illustrated in FIG. **173** are formed in the chips **118** and in the dummy substrate(s) **158**. Specifically, after the dielectric layer **139** is formed on the surfaces **124***s*, **138***s*, **158***s*, and **500***u* as shown in FIG. **172**, the trenches **139***t* illustrated in FIG. **178** are formed in the dielectric layer **139**, and then the through vias **156***v* illustrated in FIG. **173** are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**.

[0509] Alternatively, referring to FIG. **178**A, the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* as shown in FIG. **178** can be formed by the following steps. After forming the structure illustrated in FIG. **171**, an insulating layer **139***a*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness C**5**, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.15 and 2 micrometers, is formed on the surface **124***s* of the semiconductor substrate **124** of each chip **118**, on the surface(s) **158***s* of the dummy substrate(s) **158**, on the exposed bottom surfaces **500***u* of the insulating rings **500***a* in the chips **118**, and on the surface **138***s* of the encapsulation/gap filling material **138** as shown in FIG. **171**.

[0510] Next, a polymer layer **139***b*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO), is formed on the insulating layer **139***a* using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, an exposure process and a development process can be employed to form the trenches **139***t*, exposing the insulating layer **139***a*, in the polymer layer **139***b*. A 1X stepper or 1X contact aligner can be used to expose the polymer layer **139***b* during the exposure process. Next, the polymer layer **139***b* is cured or heated at a temperature between 150 degrees centigrade and 400 degrees centigrade, and preferably between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **139***b* after being cured or heated has a thickness C**6**, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0511] Next, a photoresist layer is formed on the insulating layer **139***a* exposed by the trenches **139***t* and on the polymer layer **139***b*, and multiple openings in the photoresist layer expose the insulating layer **139***a* at bottoms of the trenches **139***t*. Next, the insulating layer **139***a* under the openings in the photoresist layer is removed using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **158** under the openings in the photoresist layer and the chips **118** under the openings in the photoresist layer are etched away until predetermined regions of the layers **17** and **19** in the chips **118** and predetermined regions of the conduction layer **86** of the metal interconnects **2** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **156***v*, including the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**. The specifications of the through vias **156***v* and the supporter **803** shown in FIG. **178**A can be referred to as the specifications of the through vias **156***v* and the supporter **803**, respectively, illustrated in FIGS. **173**-**177**.

[0512] Accordingly, using the above-mentioned steps, the above-mentioned dielectric layer **139** also can be provided with the insulating layer **139***a* and the polymer layer **139***b* on the insulating layer **139***a*. The trenches **139***t* in the polymer layer **139***b* expose the insulating layer **139***a* and are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The through vias **156***v* are formed under the trenches **139***t*. Also, FIG. **179** can be an example of a schematic top perspective view showing the trenches **139***t* and the through vias **156***v* shown in FIG. **178**A, and FIG. **178**A also can be a cross-sectional view cut along the line K-K shown in FIG. **179**.

[0513] Referring to FIG. **180**, after forming the structure illustrated in FIG. **178** or in FIG. **178**A, multiple metal interconnects (or damascene metal traces) **3**, including metal interconnects (or damascene metal traces) **3***a*, **3***b* and **3***c*, are formed in the trenches **139***t*, and multiple metal plugs (or metal vias) **7***p* are formed in the through vias **156***v*. The metal plugs **7***p* include metal plugs (or metal vias) **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, respectively. The metal plug **7***a* is formed in the dummy substrate **158**, the metal plugs **7***b*, **7***c* and **7***d* are formed in the left one of the chips **118**, and the metal plugs **7***e* and **7***f* are formed in the middle one of the chips **118**. The supporter **803** and the interconnect or metal trace **75***a*, in the interconnection layer **17**, on the supporter **803** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **17** is positioned, of the metal plug **7***e*.

IPR2026-00067
TSMC EX1019 Page 311

[0514] The metal interconnects **3** in the trenches **139***t* and the metal plugs **7***p* in the through vias **156***v* can be formed by the following steps. First, the adhesion/barrier layer **125***a* illustrated in FIG. **75** is formed on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on sidewalls of the through vias **156***v*, on sidewalls and bottoms of the trenches **139***t* (or on sidewalls of the trenches **139***t* in the polymer layer **139***b* and on a top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), and on the interconnect or metal trace **75***a* that is on the supporter **803** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, the seed layer **125***b* illustrated in FIG. **75** is formed on the adhesion/barrier layer **125***a*, in the through vias **156***v*, and in the trenches **139***t* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, the conduction layer **125***c* illustrated in FIG. **75** is formed on the seed layer **125***b*, in the through vias **156***v*, and in the trenches **139***t* using a suitable process, such as electroplating process. Next, the layers **125***a*, **125***b* and **125***c* are ground or polished by using a suitable process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, until the dielectric layer **139** has an exposed top surface **139***s*, over which there are no portions of the layers **125***a*, **125***b* and **125***c*, and the layers **125***a*, **125***b* and **125***c* outside the trenches **139***t* are removed. Accordingly, the layers **125***a*, **125***b* and **125***c* in the trenches **139***t* compose the metal interconnects **3**, including the metal interconnects **3***a*, **3***b* and **3***c*, in the trenches **139***t*. The layers **125***a*, **125***b* and **125***c* in the through vias **156***v* compose the metal plugs **7***p* in the through vias **156***v*, including the metal plugs **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, respectively. The adhesion/barrier layer **125***a* and the seed layer **125***b* are at sidewalls and a bottom of the conduction layer **125***c* in the trenches **139***t*, and the sidewalls and the bottom of the conduction layer **125***c* in the trenches **139***t* are covered by the adhesion/barrier layer **125***a* and the seed layer **125***b*.

[0515] In a first alternative, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the adhesion/barrier layer **125***a* can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t* (or on the sidewalls of the trenches **139***t* in the polymer layer **139***b* and on the top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewalls of the through vias **156***v*, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer, in the trenches **139***t*, and in the through vias **156***v*. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **172-178**. Alternatively, the electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **178**A.

[0516] In a second alternative, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the adhesion/barrier layer **125***a* can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t* (or on the sidewalls of the trenches **139***t* in the polymer layer **139***b* and on the top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewalls of the through vias **156***v*, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer, in the trenches **139***t*, and in the through vias **156***v*. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers. The electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **172-178**. Alternatively, the electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **178**A.

[0517] In a third alternative, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the adhesion/barrier layer **125***a* can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t* (or on the sidewalls of the trenches **139***t* in the polymer layer **139***b* and on the top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewalls of the through vias **156***v*, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15

micrometers, on the chromium-containing layer, in the trenches **139***t*, and in the through vias **156***v*. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers. The electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **172-178**. Alternatively, the electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **178**A.

[0518] The exposed top surface **139***s* of the dielectric layer **139** can be substantially coplanar with the ground or polished surface **227** of the conduction layer **125***c* in the trenches **139***t*, and the surfaces **139***s* and **227** can be substantially flat. After the layers **125***a*, **125***b* and **125***c* are ground or polished, the dielectric layer **139** may have a thickness, between the exposed top surface **139***s* and the surface **124***s* or **158***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **172-178**. Alternatively, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the polymer layer **139***b* of the dielectric layer **139** may have a thickness, between the exposed top surface **139***s* of the polymer layer **139***b* and the top surface of the insulating layer **139***a*, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **178**A.

[0519] Each of the metal plugs **7***p* in the chips **118** passes through one of the insulating rings **500***a* in the chips **118**. For example, the metal plugs **7***b*, **7***c* and **7***d* in the left one of the chips **118** pass through the insulating rings **500***a* in the left one of the chips **118**, and the metal plugs **7***e* and **7***f* in the middle one of the chips **118** pass through the insulating rings **500***a* in the middle one of the chips **118**. Specifically, each of the metal plugs **7***b*, **7***c* and **7***d* passes through the semiconductor substrate **124** of the left one of the chips **118** and is enclosed by one of the insulating rings **500***a* in the left one of the chips **118**, and each of the metal plugs **7***e* and **7***f* passes through the semiconductor substrate **124** of the middle one of the chips **118** and is enclosed by one of the insulating rings **500***a* in the middle one of the chips **118**. The semiconductor substrate **124** of the left one of the chips **118** has portions on inner surfaces of the insulating rings **500***a* enclosing the metal plugs **7***c* and **7***d*, and the semiconductor substrate **124** of the middle one of the chips **118** has portions on inner surfaces of the insulating rings **500***a* enclosing the metal plugs **7***e* and **7***f*. The insulating ring **500***a* enclosing the metal plug **7***b* is at the sidewall of the metal plug **7***b* and contacts the metal plug **7***b*. The insulating ring **500***a* enclosing the metal plug **7***d* has a portion at and in contact with the sidewall of the metal plug **7***d*. The insulating ring **500***a* enclosing the metal plug **7***f* has a portion at and in contact with the sidewall of the metal plug **7***f*. For more detailed description about the metal plugs **7***p* (including the metal plugs **7***a*-**7***f*) and the metal interconnects **3** (including the metal interconnects **3***a*, **3***b* and **3***c*) shown in FIG. **180**, please refer to the illustration in FIG. **76**.

[0520] Alternatively, the element **118** not only can indicate a chip, but also can indicate a wafer. When the element **118** is a wafer, the element **72** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0521] Referring to FIG. **181**, after forming the structure illustrated in FIG. **180**, the following steps can be subsequently performed as illustrated in FIGS. **77-81**, and then a singulation process is performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555***s* and **555***t*.

[0522] The system-in package or multichip module **555***s* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **182**, the system-in package or multichip module **555***s* is bonded with a top side of a carrier **176** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, an under fill **174** is formed between the polymer layer **136** of the system-in package or multichip module **555***s* and the top side of the carrier **176** and encloses the solder bumps or balls **126**. Next, multiple solder balls **178** are formed on a bottom side of the carrier **176**. The specifications of the carrier **176**, the under fill **174**, and the solder balls **178** shown in FIG. **182** can be referred to as the specifications of the carrier **176**, the under fill **174**, and the solder balls **178** as illustrated in FIG. **83**, respectively.

[0523] FIG. **183** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After forming the structure illustrated in FIG. **180**, the steps as illustrated in FIGS. **77-79** can be subsequently performed. Next, forming metal bumps **668** on the polymer layer **136** and on the contact points, at the bottoms of the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** can be referred to as the steps illustrated in FIG. **84**. Next, a singulation process is performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **555***u*. In the system-in package or multichip module **555***u*, each of the interconnects **3** can be connected to one or more of the metal bumps **668**.

[0524] The system-in package or multichip module **555***u* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **184**, the system-in package or multichip module **555***u* is bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold

IPR2026-00067
TSMC EX1019 Page 313

layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Alternatively, the metal joints **180** can be a gold layer having a thickness between 0.1 and 10 micrometers. Next, the under fill **174** illustrated in FIG. **83** is formed between the polymer layer **136** of the system-in package or multichip module **555***u* and the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** are formed on the bottom side of the carrier **176**.

[0525] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **181-184** can be omitted. In this case, the polymer layer **136** is formed on the surfaces **223**, **225**, **227** and **139***s*, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0526] FIG. **185** shows a multichip package **566***d* including a system-in package or multichip module **555***v* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**, which can be formed by, e.g., the following steps.

[0527] After forming the structure illustrated in FIG. **180**, the steps illustrated in FIG. **86** are performed to form an insulating or dielectric layer **122** on the ground or polished surface **227** of the conduction layer **125***c* and on the exposed top surface **139***s* of the dielectric layer **139**, to form multiple metal interconnects or traces **300** on the insulating or dielectric layer **122** and on multiple regions, exposed by multiple openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**, and to form a polymer layer **136** on the insulating or dielectric layer **122** and on the metal interconnects or traces **300**. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers, and multiple openings **136***a* in the polymer layer **136** expose multiple contact points of the metal interconnects or traces **300**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize a plurality of the system-in package or multichip module **555***v*.

[0528] Next, the plurality of the system-in package or multichip module **555***v* are joined with a carrier **176** by, e.g., forming a glue layer **182** with a thickness between 20 and 150 micrometers on the top side of the carrier **176**, and then attaching the plurality of the system-in package or multichip module **555***v* to a top side of the carrier **11** using the glue layer **182**. The glue layer **182** can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), poly-phenylene oxide (PPO), silosane, or SU-8, with a thickness, e.g., between 20 and 150 micrometers. Next, multiple wires **184**, such as gold wires, copper wires, or aluminum wires, are wirebonded onto the top side of the carrier **176** and onto the contact points, exposed by the openings **136***a* in the polymer layer **136**, of the conduction layer **150** of the metal interconnects or traces **300** by a wirebonding process. Accordingly, the metal interconnects or traces **300** of the plurality of the system-in package or multichip module **555***v* can be physically and electrically connected to the carrier **176** through the wirebonded wires **184**. Next, a molding compound **186** is formed on the plurality of the system-in package or multichip module **555***v*, on the top side of the carrier **176** and on the wirebonded wires **184**, encapsulating the wirebonded wires **184** and the plurality of the system-in package or multichip module **555***v*, by a molding process. The molding compound **186** may include epoxy, carbon filler or glass filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, the solder balls **178** illustrated in FIG. **83** are formed on the bottom side of the carrier **176**. Thereafter, a singulation process is performed to cut the carrier **176** and the molding compound **186** and to singularize a plurality of the multichip package **566***d*. The multichip package **566***d* can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**. The specifications of the carrier **176** shown in FIG. **185** can be referred to as the specifications of the carrier **176** as illustrated in FIG. **83**.

[0529] FIGS. **186-207** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **186**, after forming the structure illustrated in FIG. **144**, a dielectric layer **60** having a thickness, e.g., between 0.1 and 100 micrometers, and preferably between 0.2 and 1.5 micrometers, between 1 and 5 micrometers, between 5 and 10 micrometers, or between 1 and 20 micrometers, is formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, on the exposed bottom surfaces **500***s* of the insulating rings **500***a* in the chips **68**, and on the surface **64***s* of the encapsulation/gap filling material **64** as shown in FIG. **144**. Next, multiple through vias **170***v*, including through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, can be formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**. The steps of forming the through vias **170***v* in the chips **68** and in the dummy substrate(s) **62** illustrated in FIG. **186** can be referred to as the steps of forming the through vias **170***v* in the chips **68** and in the dummy substrate(s) **62** as illustrated in FIG. **15**, but, in the embodiment, forming the through vias **170***v* in the chips **68** includes etching through the semiconductor substrates **58** enclosed by the insulating rings **500***a* in the chips **68**. The specifications of the through vias **170***v* (including the vias **170***a*-**170***f*), the insulating rings **500***a* enclosing the through vias **170***v*, and the supporter **801** shown in FIG. **186** can be referred to as the specifications of the through vias **170***v* (including the vias **170***a*-**170***f*), the insulating rings **500***a* enclosing the through vias **170***v*, and the supporter **801**, respectively, illustrated in FIGS. **148-152**.

[0530] The dielectric layer **60** shown in FIG. **186**, for example, can be an inorganic layer formed by a suitable process, such as chemical vapor deposition (CVD) process or plasma-enhanced chemical vapor deposition (PECVD) process. The inorganic layer may include or can be a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide on the surfaces **58***s*, **62***s*, **500***s* and **64***s* shown in FIG. **144**. The inorganic layer may

have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.5 and 2 micrometers.

[0531] Alternatively, the dielectric layer **60** shown in FIG. **186** can be a polymer layer, such as a layer of polyimide, benzocyclobutane (BCB), polybenzoxazole (PBO), polyphenylene oxide (PPO), or epoxy, having a thickness between 3 and 100 micrometers, and preferably between 5 and 30 micrometers or between 10 and 50 micrometers, on the surfaces **58***s*, **62***s*, **500***s* and **64***s* shown in FIG. **144**.

[0532] Alternatively, the dielectric layer **60** shown in FIG. **186** can be composed of an inorganic layer and a polymer layer on the inorganic layer. The inorganic layer can be formed on the surfaces **58***s*, **62***s*, **500***s* and **64***s* shown in FIG. **144** using a suitable process, such as chemical vapor deposition (CVD) process. The inorganic layer may include or can be a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide on the surfaces **58***s*, **62***s*, **500***s* and **64***s* shown in FIG. **144**. The inorganic layer may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.5 and 2 micrometers. The polymer layer can be a layer of polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO) having a thickness between 3 and 100 micrometers, and preferably between 5 and 30 micrometers or between 10 and 50 micrometers, on the inorganic layer.

[0533] Next, referring to FIG. **187**, an adhesion/barrier layer **52** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, can be formed on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on sidewalls of the through vias **170***v*, on the dielectric layer **60**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The adhesion/barrier layer **52** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **54** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, can be formed on the adhesion/barrier layer **52** and in the through vias **170***v* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a photoresist layer **194** can be formed on the seed layer **54** by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **194***a*, exposing multiple regions of the seed layer **54**, in the photoresist layer **194**. The patterned photoresist layer **194** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, a conduction layer **56** having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, can be formed on the regions, exposed by the openings **194***a* in the layer **194**, of the seed layer **54** by using, e.g., an electroplating process. The specifications of the adhesion/barrier layer **52**, the seed layer **54**, and the conduction layer **56** shown in FIG. **187** can be referred to as the specifications of the adhesion/barrier layer **52**, the seed layer **54**, and the conduction layer **56** as illustrated in FIG. **90**, respectively.

[0534] Next, referring to FIG. **188**, the photoresist layer **194** is removed using, e.g., an organic chemical solution. Next, the seed layer **54** not under the conduction layer **56** is removed by using a wet etching process or a dry etching process. Next, the adhesion/barrier layer **52** not under the conduction layer **56** is removed by using a wet etching process or a dry etching process. Accordingly, the layers **52**, **54** and **56** over the dielectric layer **60** and over the through vias **170***v* compose multiple metal interconnects **1**, including metal interconnects **1***a* and **1***b*, over the dielectric layer **60** and over the through vias **170***v*. The adhesion/barrier layer **52** and the seed layer **54** of the metal interconnects **1** over the dielectric layer **60** are not at any sidewall **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**, but under a bottom of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**. The sidewalls **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60** are not covered by the layers **52** and **54**. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f* as shown in FIG. **186**, respectively. The metal plug **5***a* is formed in the dummy substrate **62**, and the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* are formed in the same chip **68**. These metal plugs **5***p* formed in the chips **68** and in the dummy substrate(s) **62** can connect the metal interconnects **1** and the semiconductor devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**. The supporter **801** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **801** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***e*.

[0535] Each of the metal plugs **5***p* in the chips **68** passes through one of the insulating rings **500***a* in the chips **68**. For example, the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in one of the chips **68** pass through the insulating rings **500***a* in the one of the chips **68**. Specifically, each of the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* passes through the semiconductor substrate **58** of the one of the chips **68** and is enclosed by one of the insulating rings **500***a* in the one of the chips **68**. The semiconductor substrate **58** of the one of the chips **68** has portions on inner surfaces of the insulating rings **500***a* enclosing the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f*. For more detailed description about the metal plugs **5***p* (including the metal plugs **5***a*-**5***f*) and the metal interconnects **1** (including the metal interconnects **1***a* and **1***b*) shown in FIG. **188**, please refer to the illustration in FIG. **91**.

[0536] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0537] Next, referring to FIG. **189**, an insulating or dielectric layer **66** is formed on the conduction layer **56** of the metal interconnects **1**, on the dielectric layer **60**, and in gaps between the metal interconnects **1**. The insulating or dielectric layer **66**, for example, may include or can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), on the conduction layer **56** of the metal interconnects

1, on the dielectric layer **60**, and in the gaps between the metal interconnects **1**. The polymer layer on the conduction layer **56** may have a thickness, e.g., between 0.1 and 50 micrometers, and preferably between 1 and 30 micrometers, between 2 and 20 micrometers, or between 5 and 10 micrometers.

[0538] Alternatively, the insulating or dielectric layer **66** may include or can be an inorganic layer, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, on the conduction layer **56** of the metal interconnects **1**, on the dielectric layer **60**, and in the gaps between the metal interconnects **1**. The inorganic layer on the conduction layer **56** may have a thickness, e.g., between 0.1 and 10 micrometers, and preferably between 0.1 and 1 micrometers, between 0.2 and 2 micrometers, between 0.3 and 3 micrometers, or between 0.5 and 5 micrometers.

[0539] Alternatively, referring to FIG. **190**, the insulating or dielectric layer **66** as shown in FIG. **189** can be formed by the following steps. First, a polymer layer **66***a*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), is formed on the conduction layer **56** of the metal interconnects **1**, on the dielectric layer **60**, and in the gaps between the metal interconnects **1**. Next, the polymer layer **66***a* is ground or polished by, e.g., a mechanical polishing process, a chemical-mechanical-polishing (CMP) process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the conduction layer **56** of the metal interconnects **1** has a top surface **56***u* not covered by the polymer layer **66***a*. Accordingly, the polymer layer **66***a* remains on the dielectric layer **60** and in the gaps between the metal interconnects **1** and has a thickness, e.g., greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers. The ground or polished surface **66***s* of the polymer layer **66***a* can be substantially flat and substantially coplanar with the top surface **56***u* of the conduction layer **56**. Next, an inorganic layer **66***b*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness, e.g., between 0.1 and 3 micrometers, and preferably between 0.2 and 1.5 micrometers, is formed on the top surface **56***u* of the conduction layer **56** and on the ground or polished surface **66***s* of the polymer layer **66***a*. Accordingly, the insulating or dielectric layer **66** as shown in FIG. **189** also can be provided with the polymer layer **66***a* and the inorganic layer **66***b* as shown in FIG. **190**.

[0540] Referring to FIG. **191**, after forming the insulating or dielectric layer **66**, the dummy substrate **165** illustrated in FIG. **28** is joined with the insulating or dielectric layer **66** using the layer **116** illustrated in FIG. **28**, which can be referred to as the steps illustrated in FIG. **28**. Next, multiple openings **165***a* are formed in the dummy substrate **165** and expose the layer **116**, which can be referred to as the steps illustrated in FIGS. **29-32**. Alternatively, the openings **165***a* can be formed in and pass through the dummy substrate **165** before the dummy substrate **165** is joined with the insulating or dielectric layer **66** using the layer **116**. Next, multiple chips **72**, each of which is like the chip **72***a* or **72***b* illustrated in FIG. **141**K, are joined with the layer **116** and mounted in the openings **165***a* and over the layer **66**, which can be referred to as the steps illustrated in FIG. **33**. After mounting the chips **72** in the openings **165***a*, the chips **72** have active sides at bottoms of the chips **72** and backsides at tops of the chips **72**. FIG. **192** is an example of a schematical top view showing the chips **72** mounted in the openings **165***a* in the dummy substrate **165**, and FIG. **191** is a cross-sectional view cut along the line G-G shown in the schematical top view of FIG. **192**.

[0541] As shown in FIGS. **191** and **192**, there are multiple gaps **4***a* each between the dummy substrate **165** and one of the chips **72**, and there are multiple gaps **8***a* (one of them is shown) each between neighboring two chips **72**. Each of the gaps **4***a* may have a transverse distance or spacing D**4**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***a* may have a transverse distance or spacing D**5**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0542] FIG. **193** shows another technique to form the structure with the same cross-sectional view as shown in FIG. **191**. FIG. **191** is a cross-sectional view cut along the line G-G shown in a schematical top view of FIG. **193**. The structure shown in FIGS. **191** and **193** can be formed, e.g., by the following steps. After forming the structure illustrated in FIG. **189** or **190**, a glue layer **116** having a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers, is formed on the insulating or dielectric layer **66** shown in FIG. **189** or **190** by using a suitable process, such as spin coating process, laminating process, spraying process, dispensing process, or screen printing process. The glue layer **116** can be a polymer layer, such as a layer of epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or silosane, with a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers. Next, the glue layer **116** can be optionally pre-cured or baked. Next, multiple chips **72**, each of which is like the chip **72***a* or **72***b* illustrated in FIG. **141**K, and multiple separate dummy substrates **165** are placed on the glue layer **116**. When a gap between neighboring two chips **72** is too great, such as greater than 500 or 1,000 micrometers, one or more of the separate dummy substrates **165** can be placed in the gap. Alternatively, when a gap between neighboring two chips **72** is small enough, such as smaller than 500 or 1,000 micrometers, there can be no separate dummy substrates **165** placed in the gap. Next, the glue layer **116** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **116**. Accordingly, the chips **72** and the separate dummy substrates **165** are joined with the insulating or dielectric layer **66** using the glue layer **116**. The separate dummy substrates **165**, for example, can be separate silicon bars, separate dummy chips, separate dummy silicon dies, or separate substrates of polysilicon, glass, silicon, or ceramic.

[0543] Alternatively, referring to FIGS. **191** and **193**, the glue layer **116** can be replaced with a silicon-oxide layer that is formed on the insulating or dielectric layer **66** shown in FIG. **189** or **190**. In this case, joining the chips **72** with the layer **66** and joining the separate dummy substrates **165** with the layer **66** can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **74**, at the active side of each chip **72**, with the silicon-oxide layer **116** and by bonding another silicon-oxide layer of each of the separate dummy substrates **165** with the silicon-oxide layer **116**. The silicon-oxide layer of the passivation layer **74** of each chip **72** contacts the silicon-oxide layer **116**, and the silicon-oxide

layer of each of the separate dummy substrates **165** contacts the silicon-oxide layer **116**. Accordingly, the chips **72** and the separate dummy substrates **165** can be joined with the insulating or dielectric layer **66** using these silicon-oxide layers.

[0544] As shown in FIGS. **191** and **193**, there are multiple gaps **4***a* each between one of the chips **72** and one of the separate dummy substrates **165**, and there are multiple gaps **8***a* (one of them is shown) each between neighboring two chips **72**. Each of the gaps **4***a* may have a transverse distance or spacing D**4**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***a* may have a transverse distance or spacing D**5**, e.g., smaller than 500 micrometers, such as between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. In one embodiment, there are no circuits preformed in each separate dummy substrate **165** or on a top or bottom surface of each separate dummy substrate **165** before the separate dummy substrates **165** are joined with the insulating or dielectric layer **66**.

[0545] Referring to FIG. **194**, after the steps illustrated in FIGS. **191** and **192** or in FIGS. **191** and **193**, an encapsulation/gap filling material **98** is formed on a backside of the semiconductor substrate **96** of each chip **72**, on the dummy substrate(s) **165**, and in the gaps **4***a* and **8***a*. Next, the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** are ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching, until all of the insulating rings **500***a* in the chips **72** have exposed bottom surfaces **500***t*, over which there are no portions of the semiconductor substrates **96**. The steps of forming the encapsulation/gap filling material **98** and grinding or polishing the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** illustrated in FIG. **194** can be referred to as the steps of forming the encapsulation/gap filling material **64** and grinding or polishing the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** as illustrated in FIGS. **143-146**. The encapsulation/gap filling material **98** can be polysilicon, silicon oxide, or a polymer.

[0546] Accordingly, the semiconductor substrate **96** of each of the chips **72** can be thinned to a thickness T**8**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **72**, after the grinding or polishing process, the insulating rings **500***a* and the semiconductor substrate **96** may have the same thickness T**8**. Preferably, each of the chips **72**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers.

[0547] After the grinding or polishing process, the dummy substrate(s) **165** can be thinned to a thickness T**9**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **98** remaining in the gaps **4***a* and **8***a* may have a vertical thickness T**10**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **96***s* of the semiconductor substrate **96**, at the backside of each chip **72**, and the ground or polished surface(s) **165***s* of the dummy substrate(s) **165** can be substantially flat and not covered by the encapsulation/gap filling material **98**. The ground or polished surface(s) **165***s* may be substantially coplanar with the ground or polished surface **96***s* of each chip **72**, with the ground or polished surface **98***s* of the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a*, and with the exposed bottom surfaces **500***t* of the insulating rings **500***a* in the chips **72**. In each chip **72**, a vertical distance D**15** between the ground or polished surface **96***s* of the semiconductor substrate **96** and the bottom of the shallow trench isolation **500***b* can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0548] Next, referring to FIG. **195**, a dielectric layer **88** having a thickness, e.g., between 0.1 and 100 micrometers, and preferably between 0.2 and 1.5 micrometers, between 1 and 5 micrometers, between 5 and 10 micrometers, or between 1 and 20 micrometers, is formed on the surface **96***s* of the semiconductor substrate **96** of each chip **72**, on the surface(s) **165***s* of the dummy substrate(s) **165**, on the exposed bottom surfaces **500***t* of the insulating rings **500***a* in the chips **72**, and on the surface **98***s* of the encapsulation/gap filling material **98**. Next, multiple through vias **164***v*, including through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, can be formed in the chips **72** and in the dummy substrate(s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**. The steps of forming the through vias **164***v* in the chips **72** and in the dummy substrate(s) **165** illustrated in FIG. **195** can be referred to as the steps of forming the through vias **164***v* in the chips **72** and in the dummy substrate(s) **165** as illustrated in FIG. **41**, but, in the embodiment, forming the through vias **164***v* in the chips **72** includes etching through the semiconductor substrates **96** enclosed by the insulating rings **500***a* in the chips **72**. The specifications of the through vias **164***v* (including the vias **164***a*-**164***e*), the insulating rings **500***a* enclosing the through vias **164***v*, and the supporter **802** shown in FIG. **195** can be referred to as the specifications of the through vias **164***v* (including the vias **164***a*-**164***e*), the insulating rings **500***a* enclosing the through vias **164***v*, and the supporter **802**, respectively, illustrated in FIGS. **162-166**.

[0549] The dielectric layer **88** shown in FIG. **195**, for example, can be an inorganic layer formed by a suitable process, such as chemical vapor deposition (CVD) process or plasma-enhanced chemical vapor deposition (PECVD) process. The inorganic layer may include or can be a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide on the surfaces **96***s*, **165***s*, **500***t* and **98***s*. The inorganic layer may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.5 and 2 micrometers.

[0550] Alternatively, the dielectric layer **88** shown in FIG. **195** can be a polymer layer, such as a layer of polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO), having a thickness between 3

and 100 micrometers, and preferably between 5 and 30 micrometers or between 10 and 50 micrometers, on the surfaces **96***s*, **165***s*, **500***t* and **98***s*.

[0551] Alternatively, the dielectric layer **88** shown in FIG. **195** can be composed of an inorganic layer and a polymer layer on the inorganic layer. The inorganic layer can be formed on the surfaces **96***s*, **165***s*, **500***t* and **98***s* using a suitable process, such as chemical vapor deposition (CVD) process. The inorganic layer may include or can be a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide on the surfaces **96***s*, **165***s*, **500***t* and **98***s*. The inorganic layer may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.5 and 2 micrometers. The polymer layer can be a layer of polyimide, benzocyclobutane (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO) having a thickness between 3 and 100 micrometers, and preferably between 5 and 30 micrometers or between 10 and 50 micrometers, on the inorganic layer.

[0552] Next, referring to FIG. **196**, an adhesion/barrier layer **92** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, is formed on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on sidewalls of the through vias **164***v*, on the dielectric layer **88**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The adhesion/barrier layer **92** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **94** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, is formed on the adhesion/barrier layer **92** and in the through vias **164***v* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a photoresist layer **294** is formed on the seed layer **94** by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **294***a*, exposing multiple regions of the seed layer **94**, in the photoresist layer **294**. The patterned photoresist layer **294** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, a conduction layer **86** having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, is formed on the regions, exposed by the openings **294***a* in the layer **294**, of the seed layer **94** by using a suitable process, such as electroplating process. The specifications of the adhesion/barrier layer **92**, the seed layer **94**, and the conduction layer **86** shown in FIG. **196** can be referred to as the specifications of the adhesion/barrier layer **92**, the seed layer **94**, and the conduction layer **86** as illustrated in FIG. **95**, respectively.

[0553] Next, referring to FIG. **197**, the photoresist layer **294** is removed using, e.g., an organic chemical solution. Next, the seed layer **94** not under the conduction layer **86** is removed by using a wet etching process or a dry etching process. Next, the adhesion/barrier layer **92** not under the conduction layer **86** is removed by using a wet etching process or a dry etching process. Accordingly, the layers **92**, **94** and **86** over the dielectric layer **88** and over the through vias **164***v* compose multiple metal interconnects **2**, including metal interconnects **2***a* and **2***b*, over the dielectric layer **88** and over the through vias **164***v*. The adhesion/barrier layer **92** and the seed layer **94** of the metal interconnects **2** over the dielectric layer **88** are not at any sidewall **2***w* of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88**, but under a bottom of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88**. The sidewalls **2***w* of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88** are not covered by the layers **92** and **94**. The layers **92**, **94** and **86** in the through vias **164***v* compose multiple metal plugs (or metal vias) **6***p* in the through vias **164***v*, including metal plugs (or metal vias) **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e* as shown in FIG. **195**, respectively. The metal plug **6***a* is formed in the dummy substrate **165**, the metal plugs **6***b* and **6***c* are formed in the left one of the chips **72**, and the metal plugs **6***d* and **6***e* are formed in the middle one of the chips **72**. These metal plugs **6***p* formed in the chips **72** and in the dummy substrate(s) **165** can connect the metal interconnects **2** and the semiconductor devices **102** in the chips **72** and connect the metal interconnects **1** and **2**.

[0554] Each of the metal plugs **6***p* in the chips **72** passes through one of the insulating rings **500***a* in the chips **72**. For example, the metal plugs **6***b* and **6***c* in the left one of the chips **72** pass through the insulating rings **500***a* in the left one of the chips **72**, and the metal plugs **6***d* and **6***e* in the middle one of the chips **72** pass through the insulating rings **500***a* in the middle one of the chips **72**. Specifically, each of the metal plugs **6***b* and **6***c* passes through the semiconductor substrate **96** of the left one of the chips **72** and is enclosed by one of the insulating rings **500***a* in the left one of the chips **72**, and each of the metal plugs **6***d* and **6***e* passes through the semiconductor substrate **96** of the middle one of the chips **72** and is enclosed by one of the insulating rings **500***a* in the middle one of the chips **72**. The semiconductor substrate **96** of the left one of the chips **72** has a portion on an inner surface of the insulating ring **500***a* enclosing the metal plug **6***b*, and the semiconductor substrate **96** of the middle one of the chips **72** has a portion on an inner surface of the insulating ring **500***a* enclosing the metal plug **6***d*. The insulating ring **500***a* enclosing the metal plug **6***c* is at the sidewall of the metal plug **6***c* and contacts the metal plug **6***c*, and the insulating ring **500***a* enclosing the metal plug **6***e* is at the sidewall of the metal plug **6***e* and contacts the metal plug **6***e*. For more detailed description about the metal plugs **6***p* (including the metal plugs **6***a*-**6***e*) and the metal interconnects **2** (including the metal interconnects **2***a* and **2***b*) shown in FIG. **197**, please refer to the illustration in FIG. **96**.

[0555] Alternatively, the element **72** not only can indicate a chip, but also can indicate a wafer. When the element **72** is a wafer, the element **68** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0556] Next, referring to FIG. **198**, an insulating or dielectric layer **120** is formed on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in gaps between the metal interconnects **2**. The insulating or dielectric layer **120**, for example, may include or can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole

(PBO), on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in the gaps between the metal interconnects **2**. The polymer layer on the conduction layer **86** may have a thickness, e.g., between 0.1 and 50 micrometers, and preferably between 1 and 30 micrometers, between 2 and 20 micrometers, or between 5 and 10 micrometers.

[0557] Alternatively, the insulating or dielectric layer **120** may include or can be an inorganic layer, such as a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide, on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in the gaps between the metal interconnects **2**. The inorganic layer on the conduction layer **86** may have a thickness, e.g., between 0.1 and 10 micrometers, and preferably between 0.1 and 1 micrometers, between 0.2 and 2 micrometers, between 0.3 and 3 micrometers, or between 0.5 and 5 micrometers.

[0558] Alternatively, referring to FIG. **199**, the insulating or dielectric layer **120** as shown in FIG. **198** can be formed by the following steps. First, a polymer layer **120***a*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polyphenylene oxide (PPO), or polybenzoxazole (PBO), is formed on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in the gaps between the metal interconnects **2**. Next, the polymer layer **120***a* is ground or polished by, e.g., a mechanical grinding process, a mechanical polishing process, a chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching until the conduction layer **86** of the metal interconnects **2** has a top surface **86***u* not covered by the polymer layer **120***a*. Accordingly, the polymer layer **120***a* remains on the dielectric layer **88** and in the gaps between the metal interconnects **2** and has a thickness, e.g., greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers. The ground or polished surface **120***s* of the polymer layer **120***a* can be substantially flat and substantially coplanar with the top surface **86***u* of the conduction layer **86**. Next, an inorganic layer **120***b*, such as a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide, having a thickness, e.g., between 0.1 and 3 micrometers, and preferably between 0.2 and 1.5 micrometers, is formed on the top surface **86***u* of the conduction layer **86** and on the ground or polished surface **120***s* of the polymer layer **120***a*. Accordingly, the insulating or dielectric layer **120** as shown in FIG. **198** can be composed of the polymer layer **120***a* and the inorganic layer **120***b* as shown in FIG. **199**.

[0559] Referring to FIG. **200**, after forming the insulating or dielectric layer **120**, the dummy substrate **158** illustrated in FIG. **54** is joined with the insulating or dielectric layer **120** using the layer **140** illustrated in FIG. **54**, which can be referred to as the steps illustrated in FIG. **54**. Next, multiple openings **158***a* are formed in the dummy substrate **158** and expose the layer **140**, which can be referred to as the steps illustrated in FIGS. **55** and **56**. Alternatively, the openings **158***a* can be formed in and pass through the dummy substrate **158** before the dummy substrate **158** is joined with the insulating or dielectric layer **120** using the layer **140**. Next, multiple chips **118**, each of which is like the chip **118***a* or **118***b* illustrated in FIG. **141**L, are joined with the layer **140** and mounted in the openings **158***a* and over the layer **120**, which can be referred to as the steps illustrated in FIG. **57**. After mounting the chips **118** in the openings **158***a*, the chips **118** have active sides at bottoms of the chips **118** and backsides at tops of the chips **118**. FIG. **201** is an example of a schematical top view showing the chips **118** mounted in the openings **158***a* in the dummy substrate **158**, and FIG. **200** is a cross-sectional view cut along the line J-J shown in the schematical top view of FIG. **201**.

[0560] As shown in FIGS. **200** and **201**, there are multiple gaps **4***b* each between the dummy substrate **158** and one of the chips **118**, and there are multiple gaps **8***b* (one of them is shown) each between neighboring two chips **118**. Each of the gaps **4***b* may have a transverse distance or spacing D**7**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***b* may have a transverse distance or spacing D**8**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers.

[0561] FIG. **202** shows another technique to form the structure with the same cross-sectional view as shown in FIG. **200**. FIG. **200** is a cross-sectional view cut along the line J-J shown in a schematical top view of FIG. **202**. The structure shown in FIGS. **200** and **202** can be formed, e.g., by the following steps. After forming the structure illustrated in FIG. **198** or **199**, a glue layer **140** having a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers, is formed on the insulating or dielectric layer **120** shown in FIG. **198** or **199** by using a suitable process, such as spin coating process, laminating process, spraying process, dispensing process, or screen printing process. The glue layer **140** can be a polymer layer, such as a layer of epoxy, polyimide, benzocyclobutene (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or silosane, with a thickness, e.g., between 3 and 100 micrometers, and preferably between 5 and 10 micrometers or between 10 and 30 micrometers. Next, the glue layer **140** can be optionally pre-cured or baked. Next, multiple chips **118**, each of which is like the chip **118***a* or **118***b* illustrated in FIG. **141**L, and multiple separate dummy substrates **158** are placed on the glue layer **140**. When a gap between neighboring two chips **118** is too great, such as greater than 500 or 1,000 micrometers, one or more of the separate dummy substrates **158** can be placed in the gap. Alternatively, when a gap between neighboring two chips **118** is small enough, such as smaller than 500 or 1,000 micrometers, there can be no separate dummy substrates **158** placed in the gap. Next, the glue layer **140** can be cured again in a temperature between 180 degrees centigrade and 350 degrees centigrade with a mechanical or thermal pressure on the glue layer **140**. Accordingly, the chips **118** and the separate dummy substrates **158** are joined with the insulating or dielectric layer **120** using the glue layer **140**. The separate dummy substrates **158**, for example, can be separate silicon bars, separate dummy chips, separate dummy silicon dies, or separate substrates of polysilicon, glass, silicon, or ceramic.

[0562] Alternatively, referring to FIGS. **200** and **202**, the glue layer **140** can be replaced with a silicon-oxide layer that is formed on the insulating or dielectric layer **120** shown in FIG. **198** or **199**. In this case, joining the chips **118** with the layer **120** and joining the separate dummy substrates **158** with the layer **120** can be performed, e.g., by bonding another silicon-oxide layer of the passivation layer **21**, at the active side of each chip **118**, with the silicon-oxide layer **140** and by bonding another silicon-oxide layer of each of the separate dummy substrates **158** with the silicon-oxide layer **140**. The

silicon-oxide layer of the passivation layer **21** of each chip **118** contacts the silicon-oxide layer **140**, and the silicon-oxide layer of each of the separate dummy substrates **158** contacts the silicon-oxide layer **140**. Accordingly, the chips **118** and the separate dummy substrates **158** can be joined with the insulating or dielectric layer **120** using these silicon-oxide layers.

[0563] As shown in FIGS. **200** and **202**, there are multiple gaps **4***b* each between one of the chips **118** and one of the separate dummy substrates **158**, and there are multiple gaps **8***b* (one of them is shown) each between neighboring two chips **118**. Each of the gaps **4***b* may have a transverse distance or spacing D**7**, e.g., between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. Each of the gaps **8***b* may have a transverse distance or spacing D**8**, e.g., smaller than 500 micrometers, such as between 1 and 200 micrometers, between 1 and 50 micrometers, or between 1 and 10 micrometers, and preferably between 1 and 5 micrometers. In one embodiment, there are no circuits preformed in each separate dummy substrate **158** or on a top or bottom surface of each separate dummy substrate **158** before the separate dummy substrates **158** are joined with the insulating or dielectric layer **120**.

[0564] Referring to FIG. **203**, after the steps illustrated in FIGS. **200** and **201** or in FIGS. **200** and **202**, an encapsulation/gap filling material **138** is formed on a backside of the semiconductor substrate **124** of each chip **118**, on the dummy substrate(s) **158**, and in the gaps **4***b* and **8***b*. Next, the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158** are ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical grinding and chemical-mechanical polishing, until all of the insulating rings **500***a* in the chips **118** have exposed bottom surfaces **500***u*, over which there are no portions of the semiconductor substrates **124**. The steps of forming the encapsulation/gap filling material **138** and grinding or polishing the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158** illustrated in FIG. **203** can be referred to as the steps of forming the encapsulation/gap filling material **64** and grinding or polishing the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** as illustrated in FIGS. **143-146**. The encapsulation/gap filling material **138** can be polysilicon, silicon oxide, or a polymer.

[0565] Accordingly, the semiconductor substrate **124** of each of the chips **118** can be thinned to a thickness T**15**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **118**, after the grinding or polishing process, the insulating rings **500***a* and the semiconductor substrate **124** may have the same thickness T**15**. Preferably, each of the chips **118**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers.

[0566] After the grinding or polishing process, the dummy substrate(s) **158** can be thinned to a thickness T**16**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **138** remaining in the gaps **4***b* and **8***b* may have a vertical thickness T**17**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **124***s* of the semiconductor substrate **124**, at the backside of each chip **118**, and the ground or polished surface(s) **158***s* of the dummy substrate(s) **158** can be substantially flat and not covered by the encapsulation/gap filling material **138**. The ground or polished surface(s) **158***s* may be substantially coplanar with the ground or polished surfaces **124***s* of the chips **118**, with the ground or polished surface **138***s* of the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b*, and with the exposed bottom surfaces **500***u* of the insulating rings **500***a* in the chips **118**. In each chip **118**, a vertical distance D**16** between the ground or polished surface **124***s* of the semiconductor substrate **124** and the bottom of the shallow trench isolation **500***b* can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0567] Next, referring to FIG. **204**, a dielectric layer **139** having a thickness, e.g., between 0.1 and 100 micrometers, and preferably between 0.2 and 1.5 micrometers, between 1 and 5 micrometers, between 5 and 10 micrometers, or between 1 and 20 micrometers, is formed on the surface **124***s* of the semiconductor substrate **124** of each chip **118**, on the surface(s) **158***s* of the dummy substrate(s) **158**, on the exposed bottom surfaces **500***u* of the insulating rings **500***a* in the chips **118**, and on the surface **138***s* of the encapsulation/gap filling material **138**. Next, multiple through vias **156***v*, including through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, can be formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**. The steps of forming the through vias **156***v* in the chips **118** and in the dummy substrate(s) **158** illustrated in FIG. **204** can be referred to as the steps of forming the through vias **156***v* in the chips **118** and in the dummy substrate(s) **158** as illustrated in FIG. **65**, but, in the embodiment, forming the through vias **156***v* in the chips **118** includes etching through the semiconductor substrates **124** enclosed by the insulating rings **500***a* in the chips **118**. The specifications of the through vias **156***v* (including the vias **156***a*-**156***f*), the insulating rings **500***a* enclosing the through vias **156***v*, and the supporter **803** shown in FIG. **204** can be referred to as the specifications of the through vias **156***v* (including the vias **156***a*-**156***f*), the insulating rings **500***a* enclosing the through vias **156***v*, and the supporter **803**, respectively, illustrated in FIGS. **173-177**.

[0568] The dielectric layer **139** shown in FIG. **204**, for example, can be an inorganic layer formed by a suitable process, such as chemical vapor deposition (CVD) process or plasma-enhanced chemical vapor deposition (PECVD) process. The inorganic layer may include or can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC) on the surfaces **124***s*, **158***s*, **500***u* and **138***s*. The inorganic layer may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.5 and 2 micrometers.

[0569] Alternatively, the dielectric layer **139** shown in FIG. **204** can be a polymer layer, such as a layer of polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), or poly-phenylene oxide (PPO), having a thickness between 3 and 100 micrometers, and preferably between 5 and 30 micrometers or between 10 and 50 micrometers, on the surfaces **124***s*, **158***s*, **500***u* and **138***s*.

[0570] Alternatively, the dielectric layer **139** shown in FIG. **204** can be composed of an inorganic layer and a polymer layer on the inorganic layer. The inorganic layer can be formed on the surfaces **124***s*, **158***s*, **500***u* and **138***s* using a suitable process, such as chemical vapor deposition (CVD) process. The inorganic layer may include or can be a layer of silicon oxide (such as SiO_2), silicon nitride (such as Si_3N_4), silicon carbon nitride (such as SiCN), silicon oxynitride (such as SiON), or silicon oxycarbide (such as SiOC) on the surfaces **124***s*, **158***s*, **500***u* and **138***s*. The inorganic layer may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.5 and 2 micrometers. The polymer layer can be a layer of polyimide, benzocyclobutane (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO) having a thickness between 3 and 100 micrometers, and preferably between 5 and 30 micrometers or between 10 and 50 micrometers, on the inorganic layer.

[0571] Next, referring to FIG. **205**, an adhesion/barrier layer **125***a* having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, is formed on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on sidewalls of the through vias **156***v*, on the dielectric layer **139**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The adhesion/barrier layer **125***a* can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **125***b* having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, is formed on the adhesion/barrier layer **125***a* and in the through vias **156***v* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a photoresist layer **394** is formed on the seed layer **125***b* by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **394***a*, exposing multiple regions of the seed layer **125***b*, in the photoresist layer **394**. The patterned photoresist layer **394** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, a conduction layer **125***c* having a thickness greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers, can be formed on the regions, exposed by the openings **394***a* in the layer **394**, of the seed layer **125***b* by using a suitable process, such as electroplating process. The specifications of the adhesion/barrier layer **125***a*, the seed layer **125***b*, and the conduction layer **125***c* shown in FIG. **205** can be referred to as the specifications of the adhesion/barrier layer **125***a*, the seed layer **125***b*, and the conduction layer **125***c* as illustrated in FIG. **100**, respectively.

[0572] Next, referring to FIG. **206**, the photoresist layer **394** is removed using, e.g., an organic chemical solution. Next, the seed layer **125***b* not under the conduction layer **125***c* is removed by using a wet etching process or a dry etching process. Next, the adhesion/barrier layer **125***a* not under the conduction layer **125***c* is removed by using a wet etching process or a dry etching process. Accordingly, the layers **125***a*, **125***b* and **125***c* over the dielectric layer **139** and over the through vias **156***v* compose multiple metal interconnects **3**, including metal interconnects **3***a*, **3***b* and **3***c*, over the dielectric layer **139** and over the through vias **156***v*. The adhesion/barrier layer **125***a* and the seed layer **125***b* of the metal interconnects **3** over the dielectric layer **139** are not at any sidewall **3***w* of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139**, but under a bottom of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139**. The sidewalls **3***w* of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139** are not covered by the layers **125***a* and **125***b*. The layers **125***a*, **125***b* and **125***c* in the through vias **156***v* compose multiple metal plugs (or metal vias) **7***p* in the through vias **156***v*, including metal plugs (or metal vias) **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f* as shown in FIG. **204**, respectively. The metal plug **7***a* is formed in the dummy substrate **158**, the metal plugs **7***b*, **7***c* and **7***d* are formed in the left one of the chips **118**, and the metal plugs **7***e* and **7***f* are formed in the middle one of the chips **118**. These metal plugs **7***p* formed in the chips **118** and in the dummy substrate(s) **158** can connect the metal interconnects **3** and the semiconductor devices **13** in the chips **118** and connect the metal interconnects **2** and **3**. The supporter **803** and the interconnect or metal trace **75***a*, in the interconnection layer **17**, on the supporter **803** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **17** is positioned, of the metal plug **7***e*.

[0573] Each of the metal plugs **7***p* in the chips **118** passes through one of the insulating rings **500***a* in the chips **118**. For example, the metal plugs **7***b*, **7***c* and **7***d* in the left one of the chips **118** pass through the insulating rings **500***a* in the left one of the chips **118**, and the metal plugs **7***e* and **7***f* in the middle one of the chips **118** pass through the insulating rings **500***a* in the middle one of the chips **118**. Specifically, each of the metal plugs **7***b*, **7***c* and **7***d* passes through the semiconductor substrate **124** of the left one of the chips **118** and is enclosed by one of the insulating rings **500***a* in the left one of the chips **118**, and each of the metal plugs **7***e* and **7***f* passes through the semiconductor substrate **124** of the middle one of the chips **118** and is enclosed by one of the insulating rings **500***a* in the middle one of the chips **118**. The semiconductor substrate **124** of the left one of the chips **118** has portions on inner surfaces of the insulating rings **500***a* enclosing the metal plugs **7***c* and **7***d*, and the semiconductor substrate **124** of the middle one of the chips **118** has portions on inner surfaces of the insulating rings **500***a* enclosing the metal plugs **7***e* and **7***f*. The insulating ring **500***a* enclosing the metal plug **7***b* is at the sidewall of the metal plug **7***b* and contacts the metal plug **7***b*. The insulating ring **500***a* enclosing the metal plug **7***d* has a portion at and in contact with the sidewall of the metal plug **7***d*. The insulating ring **500***a* enclosing the metal plug **7***f* has a portion at and in contact with the sidewall of the metal plug **7***f*. For more detailed description about the metal plugs **7***p* (including the metal plugs **7***a*-**7***f*) and the metal interconnects

3 (including the metal interconnects **3***a*, **3***b* and **3***c*) shown in FIG. **206**, please refer to the illustration in FIG. **101**.

[0574] Alternatively, the element **118** not only can indicate a chip, but also can indicate a wafer. When the element **118** is a wafer, the element **72** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0575] Referring to FIG. **207**, after forming the structure illustrated in FIG. **206**, the following steps can be subsequently performed as illustrated in FIG. **102** to form the insulating or dielectric layer **122** on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in gaps between the metal interconnects **3**, to form the polymer layer **136** on the insulating or dielectric layer **122**, and to form multiple openings **136***a*, exposing multiple regions of the insulating or dielectric layer **122**, in the polymer layer **136**. Next, forming an under bump metallurgic (UBM) layer **666** on the polymer layer **136** and on multiple contact points, at bottoms of multiple openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** and forming multiple solder bumps or balls **126** on the UBM layer **666** can be referred to as the steps illustrated in FIGS. **78-81**. Next, a singulation process is performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **555***w* and **555***x*.

[0576] The system-in package or multichip module **555***w* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **208**, the system-in package or multichip module **555***w* is bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, the under fill **174** illustrated in FIG. **83** is formed between the polymer layer **136** of the system-in package or multichip module **555***w* and the top side of the carrier **176** and encloses the solder bumps or balls **126**. Next, the solder balls **178** illustrated in FIG. **83** are formed on the bottom side of the carrier **176**.

[0577] FIG. **209** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After forming the structure illustrated in FIG. **206**, the following steps can be subsequently performed as illustrated in FIG. **102** to form the insulating or dielectric layer **122** on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in gaps between the metal interconnects **3**, to form the polymer layer **136** on the insulating or dielectric layer **122**, and to form multiple openings **136***a*, exposing multiple regions of the insulating or dielectric layer **122**, in the polymer layer **136**. Next, the steps illustrated in FIGS. **78** and **79** can be subsequently performed. Next, forming metal bumps **668** on the polymer layer **136** and on contact points, at bottoms of openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** can be referred to as the steps illustrated in FIG. **84**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **555***y*. In the system-in package or multichip module **555***y*, each of the interconnects **3** can be connected to one or more of the metal bumps **668**.

[0578] The system-in package or multichip module **555***y* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **210**, the system-in package or multichip module **555***y* can be bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Next, the under fill **174** illustrated in FIG. **83** can be formed between the polymer layer **136** of the system-in package or multichip module **555***y* and the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**.

[0579] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **207-210** can be omitted. In this case, the polymer layer **136** is formed on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in the gaps between the metal interconnects **3**, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0580] FIG. **211** shows a multichip package **566***e* including a system-in package or multichip module **555***z* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**, which can be formed by, e.g., the following steps. After forming the structure illustrated in FIG. **206**, the following steps can be subsequently performed as illustrated in FIG. **107** to form an insulating or dielectric layer **122** on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in gaps between the metal interconnects **3**, to form multiple metal interconnects or traces **300** on the insulating or dielectric layer **122** and on multiple regions, exposed by multiple openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**, and to form a polymer layer **136** on the insulating or dielectric layer **122** and on the metal interconnects or traces **300**. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers, and multiple openings **136***a* in the polymer layer **136** expose multiple contact points of the metal interconnects or traces **300**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**,

66, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as the system-in package or multichip module **555***z*.

[0581] Next, a plurality of the system-in package or multichip module **555***z* can be joined with the carrier **176** shown in FIG. **83** by, e.g., forming a glue layer **182** with a thickness, e.g., between 1 and 20 micrometers or between 20 and 150 micrometers on the top side of the carrier **176**, and then attaching the plurality of the system-in package or multichip module **555***z* to the top side of the carrier **11** using the glue layer **182**. The glue layer **182** can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), poly-phenylene oxide (PPO), silosane, or SU-8, with a thickness, e.g., between 1 and 20 micrometers or between 20 and 150 micrometers. Next, multiple wires **184**, such as gold wires, copper wires, or aluminum wires, can be wirebonded onto the top side of the carrier **176** and onto the contact points, exposed by the openings **136***a* in the polymer layer **136**, of the conduction layer **150** of the metal interconnects or traces **300** by a wirebonding process. Accordingly, the metal interconnects or traces **300** of the plurality of the system-in package or multichip module **555***z* can be physically and electrically connected to the carrier **176** through the wirebonded wires **184**. Next, a molding compound **186** can be formed on the plurality of the system-in package or multichip module **555***z*, on the top side of the carrier **176** and on the wirebonded wires **184**, encapsulating the wirebonded wires **184** and the plurality of the system-in package or multichip module **555***z*, by a molding process. The molding compound **186** may include epoxy, carbon filler or glass filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**. Thereafter, a singulation process can be performed to cut the carrier **176** and the molding compound **186** and to singularize a plurality of the multichip package **566***e*. The multichip package **566***e* can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**.

[0582] Alternatively, the chips **68** illustrated in FIGS. **7-109** can be replaced with another type of chips **68** shown in FIG. **212**L that further include insulating plugs **789** thicker than shallow trench isolation (STI) **345**. FIGS. **212**A-**212**L show a process for forming the another type of chips **68** according to an embodiment of the present disclosure. Referring to FIG. **212**A, an insulating layer **301***a* is formed on a semiconductor substrate **58** of a wafer **680***a* using a suitable process, such as chemical vapor deposition (CVD) process. The semiconductor substrate **58** can be a silicon-germanium (SiGe) substrate, a gallium-arsenide (GaAs) substrate, or a silicon substrate with a thickness, e.g., greater than 100 micrometers, such as between 100 and 500 micrometers, and preferably between 150 and 250 micrometers or between 100 and 300 micrometers. The insulating layer **301***a*, for example, can be a pad oxide having a thickness between 1 and 20 nanometers, and preferably between 1 and 10 nanometers, on a top surface of the semiconductor substrate **58**. After forming the insulating layer **301***a* on the top surface of the semiconductor substrate **58**, a patterned photoresist layer **306** is formed on the insulating layer **301***a*. Multiple openings **306***a* in the patterned photoresist layer **306** expose multiple regions of the insulating layer **301***a*.

[0583] Next, referring to FIG. **212**B, multiple openings **307** are formed in the semiconductor substrate **58** by removing the insulating layer **301***a* under the openings **306***a* and etching the semiconductor substrate **58** under the openings **306***a*, leading the openings **307** with a depth D**17** in the semiconductor substrate **58**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers. Each of the openings **307** may have a diameter or width W**10**, e.g., between 2 and 100 micrometers, between 2 and 50 micrometers, between 2 and 20 micrometers, between 2 and 10 micrometers, or between 2 and 5 micrometers.

[0584] Next, referring to FIG. **212**C, the patterned photoresist layer **306** is removed using a chemical solution. Next, referring to FIG. **212**D, an insulating layer **567** having a thickness T**27**, e.g., between 10 and 250 nanometers, and preferably between 15 and 150 nanometers, is formed on the insulating layer **301***a* and on sidewalls and bottoms of the openings **307** using a suitable process, such as chemical vapor deposition (CVD) process, and then an insulating layer **456** is formed on the insulating layer **567** and in the openings **307** using a suitable process, such as chemical vapor deposition (CVD) process.

[0585] In a first alternative, the insulating layer **567** can be formed by depositing a layer of silicon nitride or silicon oxynitride with a thickness, e.g., between 10 and 250 nanometers, and preferably between 15 and 150 nanometers, on the insulating layer **301***a* and on the sidewalls and bottoms of the openings **307** using a suitable process, such as chemical vapor deposition (CVD). The insulating layer **456** can be formed by depositing a layer of polysilicon or silicon oxide in the openings **307** and on the layer of silicon nitride or silicon oxynitride using a suitable process, such as chemical vapor deposition (CVD).

[0586] In a second alternative, the insulating layer **567** can be formed by depositing a silicon-oxide layer with a thickness, e.g., between 1 and 20 nanometers, and preferably between 1 and 10 nanometers, on the insulating layer **301***a* and on the sidewalls and bottoms of the openings **307** using a suitable process, such as chemical vapor deposition (CVD), and then depositing a layer of silicon nitride or silicon oxynitride with a thickness, e.g., between 10 and 230 nanometers, and preferably between 15 and 140 nanometers, on the silicon-oxide layer and at the sidewalls and bottoms of the openings **307** using a suitable process, such as chemical vapor deposition (CVD). The insulating layer **456** can be formed by depositing a layer of polysilicon or silicon oxide in the openings **307** and on the layer of silicon nitride or silicon oxynitride of the insulating layer **567** using a suitable process, such as chemical vapor deposition (CVD).

[0587] Next, referring to FIG. **212**E, the insulating layer **456** is ground or polished by a chemical-mechanical-polishing (CMP) process, a mechanical polishing process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the insulating layer **567**, such as the layer of silicon nitride or silicon oxynitride of the insulating layer **567**, outside the openings **307** has a top surface **567***a* not covered by the insulating layer **456**.

[0588] Next, referring to FIG. **212**F, a patterned photoresist layer **302** is formed on the top surface **567***a* of the insulating layer **567** and on the insulating layer **456**. Multiple openings

IPR2026-00067
TSMC EX1019 Page 323

302*a* in the patterned photoresist layer **302** expose multiple regions of the top surface **567***a* of the insulating layer **567**.

[0589] Next, referring to FIG. **212**G, multiple shallow trenches **303** are formed in the semiconductor substrate **58** by removing the insulating layer **567** under the openings **302***a*, removing the insulating layer **301***a* under the openings **302***a*, and etching the semiconductor substrate **58** under the openings **302***a*, leading the shallow trenches **303** with a depth D**10** in the semiconductor substrate **58**, e.g., between 0.1 and 0.5 micrometers, and preferably between 0.15 and 0.4 micrometers. The shallow trenches **303** are used to accommodate a shallow trench isolation (STI).

[0590] Next, referring to FIG. **212**H, the patterned photoresist layer **302** is removed using a chemical solution. Next, referring to FIG. **212**I, an inorganic material **345** is formed on the top surface **567***a* of the insulating layer **567**, on the insulating layer **456**, and in the shallow trenches **303** by using a suitable process, such as chemical vapor deposition (CVD) process. The inorganic material **345** may include or can be silicon oxide.

[0591] Next, referring to FIG. **212**J, the inorganic material **345** outside the shallow trenches **303** is removed by a suitable process, such as chemical mechanical polishing (CMP) process, then the insulating layer **567** outside the openings **307** is etched away by using a chemical solution, and then all of the insulating layer **301***a* is etched away by using a chemical solution. Accordingly, the insulating layers **456** and **567** remains in the openings **307**, so called as insulating plugs **789**, and the inorganic material **345** remains in the shallow trenches **303**, so called as shallow trench isolation (STI). The insulating layer **567** of the insulating plugs **789** is on sidewalls and a bottom of the insulating layer **456** of the insulating plugs **789**, and the sidewalls and bottom of the insulating layer **456** are covered by the insulating layer **567**. The insulating layer **567** of the insulating plugs **789**, for example, can be a layer of silicon nitride or silicon oxynitride with a thickness, e.g., between 10 and 250 nanometers, and preferably between 15 and 150 nanometers, on the sidewalls and bottom of the insulating layer **456** of the insulating plugs **789**. Alternatively, the insulating layer **567** of the insulating plugs **789** can be composed of a silicon-oxide layer with a thickness, e.g., between 1 and 20 nanometers, and preferably between 1 and 10 nanometers, at the sidewalls and bottom of the insulating layer **456** of the insulating plugs **789**, and a layer of silicon nitride or silicon oxynitride with a thickness, e.g., between 10 and 230 nanometers, and preferably between 15 and 140 nanometers, between the silicon-oxide layer and the insulating layer **456** and on the sidewalls and bottom of the insulating layer **456**. The insulating plugs **789** are in the openings **307** having the depth D**17**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers, and the diameter or width W**10** between 2 and 100 micrometers, between 2 and 50 micrometers, between 2 and 20 micrometers, between 2 and 10 micrometers, or between 2 and 5 micrometers. The shallow trench isolation (STI) **345** may include or can be silicon oxide and is in the shallow trenches **303** having the depth D**10** in the semiconductor substrate **58**, e.g., between 0.1 and 0.5 micrometers, and preferably between 0.15 and 0.4 micrometers. A vertical distance D**18** between a bottom of one of the insulating plugs **789** and a bottom of the shallow trench isolation **345** can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0592] Next, referring to FIG. **212**K, multiple semiconductor devices **36** can be formed in and/or on the semiconductor substrate **58**, and then multiple dielectric layers **42**, **44**, **46** and **48**, multiple via plugs **26***a* and **34***a*, an interconnection layer **34**, a patterned metal layer **26**, and a passivation layer **24** can be formed over the top surface of the semiconductor substrate **58**.

[0593] Next, referring to FIG. **212**L, a singulation process can be performed to cut the semiconductor substrate **58** and the layers **24**, **42**, **44**, **46** and **48** of the wafer **680***a* and to singularize multiple chips **68** (one of them is shown). Each of the chips **68** includes the previously described interconnects or metal traces **35***a*, **35***b*, **35***c* and **35***d*. The element of the chips **68** in FIG. **212**L indicated by a same reference number as indicates the element of the chips **68** in FIG. **7** has a same material and spec as the element of the chips **68** illustrated in FIG. **7**. The chips **68** shown in FIG. **212**L are reverse arrangement of the chips **68** shown in FIG. **7**.

[0594] Alternatively, each of the chips **72** illustrated in FIGS. **33**-**109** can be replaced with another type of chip **72***a* or **72***b* shown in FIG. **212**M that further includes insulating plugs **789** thicker than shallow trench isolation (STI) **345**. FIG. **212**M shows cross-sectional views of the chips **72***a* and **72***b* according to an embodiment of the present disclosure. The element of the chips **72***a* and **72***b* in FIG. **212**M indicated by a same reference number as indicates the element of the chips **72** in FIG. **33** has a same material and spec as the element of the chips **72** illustrated in FIG. **33**. The chips **72***a* and **72***b* shown in FIG. **212**M are reverse arrangement of the chips **72** shown in FIG. **33**. Referring to FIG. **212**M, each of the chips **72***a* and **72***b* is provided with the semiconductor substrate **96**, the insulating plugs **789**, the shallow trench isolation (STI) **345**, the semiconductor devices **102**, the passivation layer **74**, the dielectric layers **82**, **108**, **104** and **100**, the patterned metal layer **114**, the interconnection layer **106**, and the via plugs **106***a* and **114***a*. The steps of forming the insulating plugs **789** in the openings **307** in the semiconductor substrate **96** and forming the shallow trench isolation (STI) **345** in the shallow trenches **303** in the semiconductor substrate **96** can be referred to as the steps of forming the insulating plugs **789** in the openings **307** in the semiconductor substrate **58** and forming the shallow trench isolation (STI) **345** in the shallow trenches **303** in the semiconductor substrate **58** as illustrated in FIGS. **212**A-**212**L. The specifications of the shallow trenches **303**, the openings **307**, the insulating plugs **789**, and the shallow trench isolation (STI) **345** can be referred to as the specifications of the shallow trenches **303**, the openings **307**, the insulating plugs **789**, and the shallow trench isolation (STI) **345**, respectively, illustrated in FIGS. **212**A-**212**L.

[0595] In one case, the chip **72***a* may have different circuit designs from those of the chip **72***b*. Also, in another case, the chip **72***a* may have same circuit designs as those of the chip **72***b*. Alternatively, the chip **72***a* may have a different area (top surface) or size from that of the chip **72***b*. Also, in another case, the chip **72***a* may have a same area (top surface) or size as that of the chip **72***b*.

[0596] Alternatively, each of the chips **118** illustrated in FIGS. **57**-**109** can be replaced with another type of chip **118***a* or **118***b* shown in FIG. **212**N that further includes insulating plugs **789** thicker than shallow trench isolation (STI) **345**.

FIG. **212**N shows cross-sectional views of the chips **118***a* and **118***b* according to an embodiment of the present disclosure. The element of the chips **118***a* and **118***b* in FIG. **212**N indicated by a same reference number as indicates the element of the chips **118** in FIG. **57** has a same material and spec as the element of the chips **118** illustrated in FIG. **57**. The chips **118***a* and **118***b* shown in FIG. **212**N are reverse arrangement of the chips **118** shown in FIG. **57**. Referring to FIG. **212**N, each of the chips **118***a* and **118***b* is provided with the semiconductor substrate **124**, the insulating plugs **789**, the shallow trench isolation (STI) **345**, the semiconductor devices **13**, the passivation layer **21**, the dielectric layers **78**, **28**, **38** and **40**, the patterned metal layer **19**, the interconnection layer **17**, and the via plugs **17***a* and **19***a*. The steps of forming the insulating plugs **789** in the openings **307** in the semiconductor substrate **124** and forming the shallow trench isolation (STI) **345** in the shallow trenches **303** in the semiconductor substrate **124** can be referred to as the steps of forming the insulating plugs **789** in the openings **307** in the semiconductor substrate **58** and forming the shallow trench isolation (STI) **345** in the shallow trenches **303** in the semiconductor substrate **58** as illustrated in FIGS. **212**A-**212**L. The specifications of the shallow trenches **303**, the openings **307**, the insulating plugs **789**, and the shallow trench isolation (STI) **345** can be referred to as the specifications of the shallow trenches **303**, the openings **307**, the insulating plugs **789**, and the shallow trench isolation (STI) **345**, respectively, illustrated in FIGS. **212**A-**212**L.

[0597] In one case, the chip **118***a* may have different circuit designs from those of the chip **118***b*. Also, in another case, the chip **118***a* may have same circuit designs as those of the chip **118***b*. Alternatively, the chip **118***a* may have a different area (top surface) or size from that of the chip **118***b*. Also, in another case, the chip **118***a* may have a same area (top surface) or size as that of the chip **118***b*.

[0598] FIGS. **213**-**250** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **213**, multiple of the chips **68** illustrated in FIG. **212**L and the previously described dummy substrate(s) **62** are joined with the carrier **11** using the layer **22**, which can be referred to as the steps illustrated in FIGS. **1**-**9**.

[0599] Next, referring to FIG. **214**, an encapsulation/gap filling material **64**, such as polysilicon, silicon oxide, or a polymer, can be formed on a backside of the semiconductor substrate **58** of each chip **68**, on the dummy substrate(s) **62**, and in the gaps **4** and **8**, which can be referred to as the step illustrated in FIG. **10**.

[0600] Next, referring to FIG. **215**, the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** are ground or polished by a suitable process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, until all of the insulating plugs **789** in the chips **68** have exposed bottom surfaces **789***s*, over which there are no portions of the semiconductor substrates **58**. In the case that the insulating layer **567** of the insulating plugs **789** as illustrated in FIG. **212**J is composed only of the layer of silicon nitride or silicon oxynitride, during the grinding or polishing process, the exposed bottom surfaces **789***s* are provided by the layer of silicon nitride or silicon oxynitride at tops of the insulating plugs **789**. In the another case that the insulating layer **567** of the insulating plugs **789** as illustrated in FIG. **212**J is composed of the layer of silicon oxide and the layer of silicon nitride or silicon oxynitride, during the grinding or polishing process, the layer of silicon oxide at tops of the insulating plugs **789** is removed and the exposed bottom surfaces **789***s* are provided by the layer of silicon nitride or silicon oxynitride at the tops of the insulating plugs **789**.

[0601] Accordingly, the semiconductor substrate **58** of each of the chips **68** can be thinned to a thickness T**1**, e.g, between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **68**, after the grinding or polishing process, the insulating plugs **789** and the semiconductor substrate **58** may have the same thickness T**1**. Preferably, each of the chips **68**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. After the grinding or polishing process, the dummy substrate(s) **62** can be thinned to a thickness T**2**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **64** remaining in the gaps **4** and **8** may have a vertical thickness T**3**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the ground or polished surface(s) **62***s* of the dummy substrate(s) **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The ground or polished surface(s) **62***s* may be substantially coplanar with the ground or polished surface **58***s* of each chip **68**, with the ground or polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**, and with the exposed bottom surfaces **789***s* of the insulating plugs **789**. In each chip **68**, a vertical distance D**14** between the ground or polished surface **58***s* of the semiconductor substrate **58** and the bottom of the shallow trench isolation **345** can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0602] Alternatively, FIGS. **216** and **217** show another technique to form the structure illustrated in FIG. **215**. Referring to FIG. **216**, after forming the structure illustrated in FIG. **213**, an encapsulation/gap filling material **64**, such as polysilicon or silicon oxide, is formed on a backside of the semiconductor substrate **58** of each chip **68**, on the dummy substrate(s) **62**, and in the gaps **4** and **8**, and then a polymer **65**, such as polyimide, epoxy, benzocyclobutane (BCB), polybenzoxazole (PBO), poly-phenylene oxide (PPO), or molding compound, is formed on the encapsulation/gap filling material **64** and in the gaps **4** and **8**. The encapsulation/gap filling material **64** in the gaps **4** and **8** may have a vertical thickness T**4**, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers.

[0603] Next, referring to FIG. **217**, a mechanical grinding process can be performed, e.g., by using an abrasive or grinding pad with water to grind the polymer **65**, the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** until all of the polymer **65** is removed and until a predeter-

mined vertical thickness T**5** of the encapsulation/gap filling material **64** in the gaps **4** and **8** is reached. The predetermined vertical thickness T**5** can be, e.g., between 10 and 100 micrometers, and preferably between 10 and 50 micrometers or between 20 and 50 micrometers. The abrasive or grinding pad can be provided with rough grit having an average grain size, e.g., between 0.5 and 15 micrometers for performing the mechanical grinding process. In the step, the semiconductor substrate **58** of each chip **68** has portions vertically over the insulating plugs **789**. Thereafter, a chemical-mechanical-polishing (CMP) process can be performed, e.g., by using a polish pad with a slurry containing chemicals and a fine abrasive like silica with an average grain size, e.g., between 0.02 and 0.05 micrometers to polish the backside of the semiconductor substrate **58** of each chip **68**, the dummy substrate (s) **62**, and the encapsulation/gap filling material **64** in the gaps **4** and **8** until all of the insulating plugs **789** in the chips **68** have the exposed bottom surfaces **789***s*, over which there are no portions of the semiconductor substrates **58**, as shown in FIG. **215**. Accordingly, after the grinding or polishing process, the semiconductor substrate **58** of each of the chips **68** can be thinned to the thickness T**1** between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **68**, after the grinding or polishing process, the insulating plugs **789** and the semiconductor substrate **58** may have the same thickness T**1**.

[0604] After the chemical-mechanical-polishing (CMP) process, the polished surface **58***s* of the semiconductor substrate **58**, at the backside of each chip **68**, and the polished surface(s) **62***s* of the dummy substrate(s) **62** can be substantially flat and not covered by the encapsulation/gap filling material **64**. The polished surface(s) **62***s* may be substantially coplanar with the polished surface **58***s* of each chip **68**, with the polished surface **64***s* of the encapsulation/gap filling material **64** in the gaps **4** and **8**, and with the exposed bottom surfaces **789***s* of the insulating plugs **789**. The polished surfaces **58***s*, **62***s* and **64***s* may have a micro-roughness, e.g., less than 20 nanometers. The chemical-mechanical-polishing (CMP) process, using a very fine abrasive like silica and a relatively weak chemical attack, will create the surfaces **58***s*, **62***s* and **64***s* almost without deformation and scratches, and this means that the chemical-mechanical-polishing (CMP) process is very well suited for the final polishing step, creating the clean surfaces **58***s*, **62***s* and **64***s*. Using the mechanical grinding process and the chemical-mechanical-polishing (CMP) process can be performed to create a very thin semiconductor substrate **10** of each chip **68**. Accordingly, after the chemical-mechanical-polishing (CMP) process, each of the chips **68** can be thinned to a thickness, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, the dummy substrate(s) **62** can be thinned to the thickness T**2**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **64** in the gaps **4** and **8** can be thinned to the thickness T**3**, e.g., between 3 and 35 micrometers, and preferably between 5 and 10 micrometers or between 5 and 25 micrometers.

[0605] Referring to FIG. **218**, after forming the structure illustrated in FIG. **215**, the dielectric layer **60** illustrated in FIG. **14** is formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, on the exposed bottom surfaces **789***s* of the insulating plugs **789** in the chips **68**, and on the surface **64***s* of the encapsulation/gap filling material **64**.

[0606] Next, referring to FIG. **219**, multiple through vias **170***v*, including through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**, which can be referred to as the steps illustrated in FIG. **15**, but, in the embodiment, forming the through vias **170***v* (such as the vias **170***b*-**170***f*) in the chips **68** includes etching through the insulating plugs **789** in the chips **68**. The insulating plugs **789** in the chips **68** are enclosed by the semiconductor substrates **58** of the chips **68**. The through vias **170***v* in the chips **68** pass through and are enclosed by the insulating plugs **789** in the chips **68** and expose inner walls of the insulating plugs **789**. For example, each of the through vias **170***b*, **170***c*, **170***d*, **170***e* and **170***f* in one of the chips **68** passes through and is enclosed by the insulating layers **456** and **567** of one of the insulating plugs **789** in the one of the chips **68**, exposes an inner wall of the one of the insulating plugs **789**, and exposes the insulating layer **456**, enclosed by the layer **567**, of the one of the insulating plugs **789**. Each of the through vias **170***v*, such as the through via **170***a*, **170***b*, **170***c*, **170***d*, **170***e*, or **170***f*, may have a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers. For more detailed description about the through vias **170***v*, such as the through vias **170***a*-**170***f*, please refer to the illustration in FIG. **15**.

[0607] As shown in FIG. **219**, a supporter **801** provided by the dielectric or insulating layer **20**, the glue or silicon-oxide layer **22**, and the layers **24**, **42** and **44** of one of the chips **68** is between the conductive layer **18** of the carrier **11** and the interconnect or metal trace **35***a* in the interconnection layer **34** exposed by the through via **170***e* for the purpose of supporting the exposed interconnect or metal trace **35***a*. The supporter **801** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers.

[0608] FIG. **220** is a first example of a schematic top perspective view showing the through via **170***e*, the insulating plug **789** enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **219**. The schematic top perspective view shown in FIG. **220** is similar to the schematic top perspective view shown in FIG. **16** except that the through via **170***e* shown in FIG. **220** is formed within one of the insulating plugs **789** in one of the chips **68**. For more detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIGS. **219** and **220**, please refer to the illustration in FIGS. **15** and **16**.

[0609] FIG. **221** is a second example of a schematic top perspective view showing the through via **170***e*, the insulating plug **789** enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **219**. The schematic top perspective view shown in FIG. **221** is similar to the schematic top perspective view shown in FIG. **17** except that the through via **170***e* shown in FIG. **221** is formed within one of the insulating plugs **789** in one of the chips **68**. For more

detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIGS. **219** and **221**, please refer to the illustration in FIGS. **15** and **17**.

[0610] FIG. **222** is a third example of a schematic top perspective view showing the through via **170***e*, the insulating plug **789** enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **219**. The schematic top perspective view shown in FIG. **222** is similar to the schematic top perspective view shown in FIG. **18** except that the through via **170***e* shown in FIG. **222** is formed within one of the insulating plugs **789** in one of the chips **68**. For more detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIGS. **219** and **222**, please refer to the illustration in FIGS. **15** and **18**.

[0611] FIG. **223** is a fourth example of a schematic top perspective view showing the through via **170***e*, the insulating plug **789** enclosing the through via **170***e*, and the interconnect or metal trace **35***a* as illustrated in FIG. **219**. The schematic top perspective view shown in FIG. **223** is similar to the schematic top perspective view shown in FIG. **16**A except that the through via **170***e* shown in FIG. **223** is formed within one of the insulating plugs **789** in one of the chips **68**. For more detailed description about the through via **170***e* and the interconnect or metal trace **35***a* as shown in FIG. **223**, please refer to the illustration in FIG. **16**A.

[0612] Referring to FIG. **224**, after forming the structure illustrated in FIG. **219**, multiple trenches **60***t* are formed in the dielectric layer **60**. The trenches **60***t* in the dielectric layer **60** have a depth D**3**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers. The dielectric layer **60** under the trenches **60***t* has a remaining thickness T**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers. The steps of forming the trenches **60***t* in the dielectric layer **60** shown in FIG. **224** can be referred to as the steps of forming the trenches **60***t* in the dielectric layer **60** as illustrated in FIGS. **153-155**. The trenches **60***t* formed in the dielectric layer **60** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. Also, FIG. **156** can be an example of a schematic top perspective view showing the trenches **60***t* and the through vias **170***v* shown in FIG. **224**, and FIG. **224** also can be a cross-sectional view cut along the line D-D shown in FIG. **156**.

[0613] Alternatively, the trenches **60***t* illustrated in FIG. **224** can be formed in the dielectric layer **60** before the through vias **170***v* illustrated in FIG. **219** are formed in the chips **68** and in the dummy substrate(s) **62**. Specifically, after the dielectric layer **60** is formed on the surfaces **58***s*, **62***s*, **64***s* and **789***s* as shown in FIG. **218**, the trenches **60***t* illustrated in FIG. **224** are formed in the dielectric layer **60**, and then the through vias **170***v* illustrated in FIG. **219** are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**.

[0614] Alternatively, referring to FIG. **225**, the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* as shown in FIG. **224** can be formed by the following steps. After forming the structure illustrated in FIG. **215**, an insulating layer **60***a*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness C**1**, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.15 and 2 micrometers, is formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, on the exposed bottom surfaces **789***s* of the insulating plugs **789** in the chips **68**, and on the surface **64***s* of the encapsulation/gap filling material **64** as shown in FIG. **215**.

[0615] Next, a polymer layer **60***b*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO), is formed on the insulating layer **60***a* using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, an exposure process and a development process can be employed to form the trenches **60***t*, exposing the insulating layer **60***a*, in the polymer layer **60***b*. A 1X stepper or 1X contact aligner can be used to expose the polymer layer **60***b* during the exposure process. Next, the polymer layer **60***b* is cured or heated at a temperature between 150 degrees centigrade and 400 degrees centigrade, and preferably between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **60***b* after being cured or heated has a thickness C**2**, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0616] Next, a photoresist layer is formed on the insulating layer **60***a* exposed by the trenches **60***t* and on the polymer layer **60***b*, and multiple openings in the photoresist layer expose the insulating layer **60***a* at bottoms of the trenches **60***t*. Next, the insulating layer **60***a* under the openings in the photoresist layer is removed using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **62** under the openings in the photoresist layer and the chips **68** under the openings in the photoresist layer are etched away until predetermined regions of the layers **26** and **34** in the chips **68** and predetermined regions of the conductive layer **18** in the carrier **11** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **170***v*, including the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**. The specifications of the through vias **170***v* and the supporter **801** shown in FIG. **225** can be referred to as the specifications of the through vias **170***v* and the supporter **801**, respectively, illustrated in FIGS. **219-223**.

[0617] Accordingly, using the above-mentioned steps, the above-mentioned dielectric layer **60** also can be provided with the insulating layer **60***a* and the polymer layer **60***b* on the insulating layer **60***a*. The trenches **60***t* in the polymer layer **60***b* expose the insulating layer **60***a* and are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The through vias **170***v* are formed under the trenches **60***t*. Also, FIG. **156** can be an example of a schematic top perspective view showing the trenches **60***t* and the through vias **170***v* shown in FIG. **225**, and FIG. **225** also can be a cross-sectional view cut along the line D-D shown in FIG. **156**.

[0618] Referring to FIG. **226**, after forming the structure illustrated in FIG. **224** or in FIG. **225**, an adhesion/barrier layer **52** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, is formed on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on sidewalls of the through vias **170***v*, on sidewalls and bottoms of the trenches **60***t* (or on sidewalls of the trenches **60***t* in the poly-

mer layer **60***b* and on a top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*), on the inner walls, exposed by the through vias **170***v*, of the insulating plugs **789**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The adhesion/barrier layer **52** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **54** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, is formed on the adhesion/barrier layer **52** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a conduction layer **56** is formed on the seed layer **54** using a suitable process, such as electroplating process. The specifications of the adhesion/barrier layer **52**, the seed layer **54**, and the conduction layer **56** shown in FIG. **226** can be referred to as the specifications of the adhesion/barrier layer **52**, the seed layer **54**, and the conduction layer **56** as illustrated in FIG. **25**, respectively.

[0619] Next, referring to FIG. **227**, the layers **52**, **54** and **56** are ground or polished by using, e.g., a chemical-mechanical-polishing (CMP) process, a mechanical polishing process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the dielectric layer **60** has an exposed top surface **60***s*, over which there are no portions of the layers **52**, **54** and **56**, and the layers **52**, **54** and **56** outside the trenches **60***t* are removed.

[0620] Accordingly, the exposed top surface **60***s* of the dielectric layer **60** can be substantially coplanar with the ground or polished surface **56***s* of the conduction layer **56** in the trenches **60***t*, and the surfaces **56***s* and **60***s* can be substantially flat. The adhesion/barrier layer **52** and the seed layer **54** are at sidewalls and a bottom of the conduction layer **56** in the trenches **60***t*, and the sidewalls and the bottom of the conduction layer **56** in the trenches **60***t* are covered by the adhesion/barrier layer **52** and the seed layer **54**.

[0621] After the layers **52**, **54** and **56** are ground or polished, the dielectric layer **60** has a thickness, between the exposed top surface **60***s* and the surface **58***s* or **62***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **218-224**. Alternatively, after the layers **52**, **54** and **56** are ground or polished, the polymer layer **60***b* of the dielectric layer **60** has a thickness, between the exposed top surface **60***s* of the polymer layer **60***b* and the top surface of the insulating layer **60***a*, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layer **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **225**.

[0622] In a first alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t* (or on the sidewalls of the trenches **60***t* in the polymer layer **60***b* and on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*), on the sidewalls of the through vias **170***v*, on the inner walls of the insulating plugs **789** in the chips **68**, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **218-224**. Alternatively, the electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layers **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **225**.

[0623] In a second alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t* (or on the sidewalls of the trenches **60***t* in the polymer layer **60***b* and on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*), on the sidewalls of the through vias **170***v*, on the inner walls of the insulating plugs **789** in the chips **68**, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **218-224**. Alternatively, the electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layers **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **225**.

[0624] In a third alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **60***t* (or on the sidewalls of the trenches **60***t* in the polymer layer **60***b* and on the top surface of the

insulating layer **60***a* at the bottoms of the trenches **60***t*), on the sidewalls of the through vias **170***v*, on the inner walls of the insulating plugs **789** in the chips **68**, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **60**, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIGS. **218-224**. Alternatively, the electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **60** composed of the layers **60***a* and **60***b*, the trenches **60***t*, and the through vias **170***v* are formed as illustrated in FIG. **225**.

[0625] After the layers **52**, **54** and **56** are ground or polished, the layers **52**, **54** and **56** in the trenches **60***t* compose multiple metal interconnects (or damascene metal traces) **1**, including metal interconnects (or damascene metal traces) **1***a* and **1***b*, in the trenches **60***t*. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, respectively. The metal plug **5***a* is formed in the dummy substrate **62**, and the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* are formed in the same chip **68**. These metal plugs **5***p* formed in the chips **68** and in the dummy substrate(s) **62** can connect the metal interconnects **1** and the semiconductor devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**. The metal interconnects **1**, such as **1***a* and **1***b*, in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 1 and 3 micrometers. The supporter **801** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **801** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***e*.

[0626] Each of the metal plugs **5***p* in the chips **68** passes through one of the insulating plugs **789** in the chips **68**, contacts the inner wall of the one of the insulating plugs **789**, and is enclosed by the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. For example, each of the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in one of the chips **68** passes through one of the insulating plugs **789** in the one of the chips **68**, contacts the inner wall of the one of the insulating plugs **789**, and is enclosed by the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. For more detailed description about the metal plugs **5***p* (including the metal plugs **5***a*-**5***f*) and the metal interconnects **1** (including the metal interconnects **1***a* and **1***b*) shown in FIG. **227**, please refer to the illustration in FIG. **26**.

[0627] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0628] Referring to FIG. **228**, after forming the structure illustrated in FIG. **227**, the insulating or dielectric layer **66** illustrated in FIG. **27** is formed on the ground or polished surface **56***s* of the conduction layer **56** and on the exposed top surface **60***s* of the dielectric layer **60**. Next, multiple chips **72**, each of which is like the chip **72***a* or **72***b* illustrated in FIG. **212**M, and the previously described dummy substrate(s) **165** are placed over the layer **116**, which can be referred to as the steps illustrated in FIGS. **28-35**. The arrangement of placing the chips **72** and the dummy substrate(s) **165** over the insulating or dielectric layer **66**, in the embodiment, can be referred to as that of placing the chips **72** and the dummy substrate(s) **165** over the insulating or dielectric layer **66** as illustrated in FIG. **34** or **35**.

[0629] Next, referring to FIG. **229**, an encapsulation/gap filling material **98** is formed on a backside of the semiconductor substrate **96** of each chip **72**, on the dummy substrate (s) **165**, and in the gaps **4***a* and **8***a*. Next, the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** are ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical grinding and chemical-mechanical polishing, until all of the insulating plugs **789** in the chips **72** have exposed bottom surfaces **789***t*, over which there are no portions of the semiconductor substrates **96**. The steps of forming the encapsulation/gap filling material **98** and grinding or polishing the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** illustrated in FIG. **229** can be referred to as the steps of forming the encapsulation/gap filling material **64** and grinding or polishing the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** as illustrated in FIGS. **214-217**. The encapsulation/gap filling material **98** can be polysilicon, silicon oxide, or a polymer. In the case that the insulating layer **567** of the insulating plugs **789** is composed only of the layer of silicon nitride or silicon oxynitride, during the grinding or polishing process, the exposed bottom surfaces **789***t* are provided by the layer of silicon nitride or silicon oxynitride at tops of the insulating plugs **789**. In the another case that the insulating layer **567** of the insulating plugs **789** is composed of the layer of silicon oxide and the layer of silicon nitride or silicon oxynitride, during the grinding or polishing process, the layer of silicon oxide at tops of the insulating plugs **789** is removed and the exposed bottom surfaces **789***t* are provided by the layer of silicon nitride or silicon oxynitride at the tops of the insulating plugs **789**.

[0630] Accordingly, the semiconductor substrate **96** of each of the chips **72** can be thinned to a thickness T**8**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **72**, after the grinding or polishing process, the insulating plugs **789** and the semiconductor substrate **96** may have the same thickness T**8**. Preferably, each of the chips **72**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105

IPR2026-00067
TSMC EX1019 Page 329

micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers.

[0631] After the grinding or polishing process, the dummy substrate(s) **165** can be thinned to a thickness T**9**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **98** remaining in the gaps **4***a* and **8***a* may have a vertical thickness T**10**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **96***s* of the semiconductor substrate **96**, at the backside of each chip **72**, and the ground or polished surface(s) **165***s* of the dummy substrate(s) **165** can be substantially flat and not covered by the encapsulation/gap filling material **98**. The ground or polished surface(s) **165***s* may be substantially coplanar with the ground or polished surface **96***s* of each chip **72**, with the ground or polished surface **98***s* of the encapsulation/gap filling material **98** in the gaps **4***a* and **8***a*, and with the exposed bottom surfaces **789***t* of the insulating plugs **789** in the chips **72**. In each chip **72**, a vertical distance D**15** between the surface **96***s* of the semiconductor substrate **96** and the bottom of the shallow trench isolation **345** can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0632] Referring to FIG. **230**, after forming the structure illustrated in FIG. **229**, the dielectric layer **88** illustrated in FIG. **40** is formed on the surface **96***s* of the semiconductor substrate **96** of each chip **72**, on the surface(s) **165***s* of the dummy substrate(s) **165**, on the exposed bottom surfaces **789***t* of the insulating plugs **789** in the chips **72**, and on the surface **98***s* of the encapsulation/gap filling material **98**.

[0633] Next, referring to FIG. **231**, multiple through vias **164***v*, including through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, are formed in the chips **72** and in the dummy substrate (s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**, which can be referred to as the steps illustrated in FIG. **41**, but, in the embodiment, forming the through vias **164***v* (such as the vias **164***b*-**164***e*) in the chips **72** includes etching through the insulating plugs **789** in the chips **72**. The insulating plugs **789** in the chips **72** are enclosed by the semiconductor substrates **96** of the chips **72**. The through vias **164***v* in the chips **72** pass through and are enclosed by the insulating plugs **789** in the chips **72** and expose inner walls of the insulating plugs **789**. For example, the through via **164***b* in the left one of the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the left one of the chips **72**, exposes an inner wall of the one of the insulating plugs **789**, and exposes the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The through via **164***c* in the left one of the chips **72** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **72**, exposes an inner wall of the another one of the insulating plugs **789**, and exposes the insulating layer **567** of the another one of the insulating plugs **789**. The through via **164***d* in the middle one of the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the middle one of the chips **72**, exposes an inner wall of the one of the insulating plugs **789**, and exposes the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The through via **164***e* in the middle one of the chips **72** passes through and is enclosed by another one of the insulating plugs **789** in the middle one of the chips **72**, exposes an inner wall of the another one of the insulating plugs **789**, and exposes the insulating layer **567** of the another one of the insulating plugs **789**.

[0634] Each of the through vias **164***v*, such as the through via **164***a*, **164***b*, **164***c*, **164***d*, or **164***e*, has a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers. For more detailed description about the through vias **164***v*, such as the through vias **164***a*-**164***e*, please refer to the illustration in FIG. **41**.

[0635] As shown in FIG. **231**, a supporter **802** provided by the insulating or dielectric layer **66**, the layer **116**, and the layers **74**, **82** and **108** of the middle one of the chips **72** is between the conduction layer **56** of the metal interconnect **1***b* and the interconnect or metal trace **55***a* in the interconnection layer **106** exposed by the through via **164***e* for the purpose of supporting the exposed interconnect or metal trace **55***a*. The supporter **802** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers.

[0636] FIG. **232** is a first example of a schematic top perspective view showing the through via **164***e*, the insulating plug **789** enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **231**. The schematic top perspective view shown in FIG. **232** is similar to the schematic top perspective view shown in FIG. **42** except that the through via **164***e* shown in FIG. **232** is formed within one of the insulating plugs **789** in the middle one of the chips **72**. For more detailed description about the through via **164***e* and the interconnect or metal trace **55***a* as shown in FIGS. **231** and **232**, please refer to the illustration in FIGS. **41** and **42**.

[0637] FIG. **233** is a second example of a schematic top perspective view showing the through via **164***e*, the insulating plug **789** enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **231**. The schematic top perspective view shown in FIG. **233** is similar to the schematic top perspective view shown in FIG. **43** except that the through via **164***e* shown in FIG. **233** is formed within one of the insulating plugs **789** in the middle one of the chips **72**. For more detailed description about the through via **164***e* and the interconnect or metal trace **55***a* as shown in FIGS. **231** and **233**, please refer to the illustration in FIGS. **41** and **43**.

[0638] FIG. **234** is a third example of a schematic top perspective view showing the through via **164***e*, the insulating plug **789** enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **231**. The schematic top perspective view shown in FIG. **234** is similar to the schematic top perspective view shown in FIG. **44** except that the through via **164***e* shown in FIG. **234** is formed within one of the insulating plugs **789** in the middle one of the chips **72**. For more detailed description about the through via **164***e* and the interconnect or metal trace **55***a* as shown in FIGS. **231** and **234**, please refer to the illustration in FIGS. **41** and **44**.

[0639] FIG. **235** is a fourth example of a schematic top perspective view showing the through via **164***e*, the insulating plug **789** enclosing the through via **164***e*, and the interconnect or metal trace **55***a* as illustrated in FIG. **231**. The schematic top perspective view shown in FIG. **235** is similar to the schematic top perspective view shown in FIG. **42**A except

IPR2026-00067
TSMC EX1019 Page 330

that the through via **164***e* shown in FIG. **235** is formed within one of the insulating plugs **789** in the middle one of the chips **72**. For more detailed description about the through via **164***e* and the interconnect or metal trace **55***a* as shown in FIG. **235**, please refer to the illustration in FIG. **42**A.

[0640] Referring to FIG. **236**, after forming the structure illustrated in FIG. **231**, multiple trenches **88***t* are formed in the dielectric layer **88**. The trenches **88***t* in the dielectric layer **88** have a depth D**6**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers. The dielectric layer **88** under the trenches **88***t* has a remaining thickness T**13**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers. The steps of forming the trenches **88***t* in the dielectric layer **88** shown in FIG. **236** can be referred to as the steps of forming the trenches **60***t* in the dielectric layer **60** as illustrated in FIGS. **153-155**. The trenches **88***t* formed in the dielectric layer **88** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. Also, FIG. **168** can be an example of a schematic top perspective view showing the trenches **88***t* and the through vias **164***v* shown in FIG. **236**, and FIG. **236** also can be a cross-sectional view cut along the line H-H shown in FIG. **168**.

[0641] Alternatively, the trenches **88***t* illustrated in FIG. **236** can be formed in the dielectric layer **88** before the through vias **164***v* illustrated in FIG. **231** are formed in the chips **72** and in the dummy substrate(s) **165**. Specifically, after the dielectric layer **88** is formed on the surfaces **96***s*, **98***s*, **165***s* and **789***t* as shown in FIG. **230**, the trenches **88***t* illustrated in FIG. **236** are first formed in the dielectric layer **88**, and then the through vias **164***v* illustrated in FIG. **231** are formed in the chips **72** and in the dummy substrate(s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**.

[0642] Alternatively, referring to FIG. **237**, the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* as shown in FIG. **236** can be formed by the following steps. After forming the structure illustrated in FIG. **229**, an insulating layer **88***a*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness C**3**, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.15 and 2 micrometers, is formed on the surface **96***s* of the semiconductor substrate **96** of each chip **72**, on the surface(s) **165***s* of the dummy substrate(s) **165**, on the exposed bottom surfaces **789***t* of the insulating plugs **789** in the chips **72**, and on the surface **98***s* of the encapsulation/gap filling material **98** as shown in FIG. **229**.

[0643] Next, a polymer layer **88***b*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO), is formed on the insulating layer **88***a* using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, an exposure process and a development process can be employed to form the trenches **88***t*, exposing the insulating layer **88***a*, in the polymer layer **88***b*. A 1X stepper or 1X contact aligner can be used to expose the polymer layer **88***b* during the exposure process. Next, the polymer layer **88***b* is cured or heated at a temperature between 150 degrees centigrade and 400 degrees centigrade, and preferably between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **88***b* after being cured or heated has a thickness C**4**, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0644] Next, a photoresist layer is formed on the insulating layer **88***a* exposed by the trenches **88***t* and on the polymer layer **88***b*, and multiple openings in the photoresist layer expose the insulating layer **88***a* at bottoms of the trenches **88***t*. Next, the insulating layer **88***a* under the openings in the photoresist layer is removed using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **165** under the openings in the photoresist layer and the chips **72** under the openings in the photoresist layer are etched away until predetermined regions of the layers **106** and **114** in the chips **72** and predetermined regions of the conduction layer **56** of the metal interconnects **1** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **164***v*, including the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, are formed in the chips **72** and in the dummy substrate(s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **106** and **114** of the chips **72**. The specifications of the through vias **164***v* and the supporter **802** shown in FIG. **237** can be referred to as the specifications of the through vias **164***v* and the supporter **802**, respectively, illustrated in FIGS. **231-235**.

[0645] Accordingly, using the above-mentioned steps, the above-mentioned dielectric layer **88** also can be provided with the insulating layer **88***a* and the polymer layer **88***b* on the insulating layer **88***a*. The trenches **88***t* in the polymer layer **88***b* expose the insulating layer **88***a* and are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The through vias **164***v* are formed under the trenches **88***t*. Also, FIG. **168** can be an example of a schematic top perspective view showing the trenches **88***t* and the through vias **164***v* shown in FIG. **237**, and FIG. **237** also can be a cross-sectional view cut along the line H-H shown in FIG. **168**.

[0646] Referring to FIG. **238**, after forming the structure illustrated in FIG. **236** or in FIG. **237**, multiple metal interconnects (or damascene metal traces) **2**, including metal interconnects (or damascene metal traces) **2***a* and **2***b*, are formed in the trenches **88***t*, and multiple metal plugs (or metal vias) **6***p* are formed in the through vias **164***v*. The metal plugs **6***p* include metal plugs (or metal vias) **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, respectively. The metal plug **6***a* is formed in the dummy substrate **165**. The metal plugs **6***b* and **6***c* are formed in the left one of the chips **72**, and the metal plugs **6***d* and **6***e* are formed in the middle one of the chips **72**. The supporter **802** and the interconnect or metal trace **55***a*, in the interconnection layer **106**, on the supporter **802** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **106** is positioned, of the metal plug **6***e*.

[0647] The metal interconnects **2** in the trenches **88***t* and the metal plugs **6***p* in the through vias **164***v* can be formed by the following steps. First, the adhesion/barrier layer **92** illustrated in FIG. **51** is formed on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on sidewalls of the through vias **164***v*, on sidewalls and bottoms of the trenches **88***t* (or on sidewalls of the trenches **88***t* in the polymer layer **88***b* and on a top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), on the inner walls, exposed by the through vias **164***v*, of the insulating plugs **789**, and on the interconnect or metal trace **55***a* that is on the supporter **802** by a physical vapor deposition (PVD) process, such as sputtering process

IPR2026-00067
TSMC EX1019 Page 331

or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, the seed layer **94** illustrated in FIG. **51** is formed on the adhesion/barrier layer **92**, in the through vias **164***v*, and in the trenches **88***t* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, the conduction layer **86** illustrated in FIG. **51** is formed on the seed layer **94**, in the through vias **164***v*, and in the trenches **88***t* by using a suitable process, such as electroplating process. Next, the layers **92**, **94** and **86** are ground or polished by using, e.g., a chemical-mechanical-polishing (CMP) process, a mechanical polishing process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the dielectric layer **88** has an exposed top surface **88***s*, over which there are no portions of the layers **92**, **94** and **86**, and the layers **92**, **94** and **86** outside the trenches **88***t* are removed. Accordingly, the layers **92**, **94** and **86** in the trenches **88***t* compose the metal interconnects **2**, including the metal interconnects **2***a* and **2***b*, in the trenches **88***t*. The layers **92**, **94** and **86** in the through vias **164***v* compose the metal plugs **6***p* in the through vias **164***v*, including the metal plugs **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, respectively. The adhesion/barrier layer **92** and the seed layer **94** are at sidewalls and a bottom of the conduction layer **86** in the trenches **88***t*, and the sidewalls and the bottom of the conduction layer **86** in the trenches **88***t* are covered by the adhesion/barrier layer **92** and the seed layer **94**.

[0648] In a first alternative, after the layers **92**, **94** and **86** are ground or polished, the adhesion/barrier layer **92** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t* (or on the sidewalls of the trenches **88***t* in the polymer layer **88***b* and on the top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewalls of the through vias **164***v*, on the inner walls of the insulating plugs **789** in the chips **72**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer, in the trenches **88***t*, and in the through vias **164***v*. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **230**-**236**. Alternatively, the electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **88** composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **237**.

[0649] In a second alternative, after the layers **92**, **94** and **86** are ground or polished, the adhesion/barrier layer **92** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t* (or on the sidewalls of the trenches **88***t* in the polymer layer **88***b* and on the top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewalls of the through vias **164***v*, on the inner walls of the insulating plugs **789** in the chips **72**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer, in the trenches **88***t*, and in the through vias **164***v*. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **230**-**236**. Alternatively, the electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **88** composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **237**.

[0650] In a third alternative, after the layers **92**, **94** and **86** are ground or polished, the adhesion/barrier layer **92** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **88***t* (or on the sidewalls of the trenches **88***t* in the polymer layer **88***b* and on the top surface of the insulating layer **88***a* at the bottoms of the trenches **88***t*), on the layers **56**, **106** and **114** at the bottoms of the through vias **164***v*, on the sidewalls of the through vias **164***v*, on the inner walls of the insulating plugs **789** in the chips **72**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. The seed layer **94** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer, in the trenches **88***t*, and in the through vias **164***v*. The conduction layer **86** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **88***t*, and in the through vias **164***v*. The electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **230**-**236**. Alternatively, the electroplated copper layer in the trenches **88***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer

IPR2026-00067
TSMC EX1019 Page 332

88 composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **237**.

[0651] The exposed top surface **88***s* of the dielectric layer **88** can be substantially coplanar with the ground or polished surface **86***s* of the conduction layer **86** in the trenches **88***t*, and the surfaces **86***s* and **88***s* can be substantially flat. After the layers **92**, **94** and **86** are ground or polished, the dielectric layer **88** may have a thickness, between the exposed top surface **88***s* and the surface **96***s* or **165***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers, in case the dielectric layer **88**, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIGS. **230-236**. Alternatively, after the layers **92**, **94** and **86** are ground or polished, the polymer layer **88***b* of the dielectric layer **88** may have a thickness, between the exposed top surface **88***s* of the polymer layer **88***b* and the top surface of the insulating layer **88***a*, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **88** composed of the layers **88***a* and **88***b*, the trenches **88***t*, and the through vias **164***v* are formed as illustrated in FIG. **237**.

[0652] Each of the metal plugs **6***p* in the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the chips **72** and contacts the inner wall of the one of the insulating plugs **789**. For example, the metal plug **6***b* in the left one of the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the left one of the chips **72**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The metal plug **6***c* in the left one of the chips **72** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **72**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** of the another one of the insulating plugs **789**. The metal plug **6***d* in the middle one of the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the middle one of the chips **72**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The metal plug **6***e* in the middle one of the chips **72** passes through and is enclosed by another one of the insulating plugs **789** in the middle one of the chips **72**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** of the another one of the insulating plugs **789**. For more detailed description about the metal plugs **6***p* (including the metal plugs **6***a*-**6***e*) and the metal interconnects **2** (including the metal interconnects **2***a* and **2***b*) shown in FIG. **238**, please refer to the illustration in FIG. **52**.

[0653] Alternatively, the element **72** not only can indicate a chip, but also can indicate a wafer. When the element **72** is a wafer, the element **68** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0654] Referring to FIG. **239**, after forming the structure illustrated in FIG. **238**, the insulating or dielectric layer **120** illustrated in FIG. **53** is formed on the ground or polished surface **86***s* of the conduction layer **86** and on the exposed top surface **88***s* of the dielectric layer **88**. Next, multiple chips **118**, each of which is like the chip **118***a* or **118***b* illustrated in FIG. **212**N, and the previously described dummy substrate(s) **158** are placed over the layer **140**, which can be referred to as the steps illustrated in FIGS. **54-59**. The arrangement of placing the chips **118** and the dummy substrate(s) **158** over the insulating or dielectric layer **120**, in the embodiment, can be referred to as that of placing the chips **118** and the dummy substrate(s) **158** over the insulating or dielectric layer **120** as illustrated in FIG. **58** or **59**.

[0655] Next, referring to FIG. **240**, an encapsulation/gap filling material **138** is formed on a backside of the semiconductor substrate **124** of each chip **118**, on the dummy substrate(s) **158**, and in the gaps **4***b* and **8***b*. Next, the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158** are ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical grinding and chemical-mechanical polishing, until all of the insulating plugs **789** in the chips **118** have exposed bottom surfaces **789***u*, over which there are no portions of the semiconductor substrates **124**. The steps of forming the encapsulation/gap filling material **138** and grinding or polishing the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate (s) **158** illustrated in FIG. **240** can be referred to as the steps of forming the encapsulation/gap filling material **64** and grinding or polishing the encapsulation/gap filling material **64**, the backside of the semiconductor substrate **58** of each chip **68**, and the dummy substrate(s) **62** as illustrated in FIGS. **214-217**. The encapsulation/gap filling material **138** can be polysilicon, silicon oxide, or a polymer. In the case that the insulating layer **567** of the insulating plugs **789** is composed only of the layer of silicon nitride or silicon oxynitride, during the grinding or polishing process, the exposed bottom surfaces **789***u* are provided by the layer of silicon nitride or silicon oxynitride at tops of the insulating plugs **789**. In the another case that the insulating layer **567** of the insulating plugs **789** is composed of the layer of silicon oxide and the layer of silicon nitride or silicon oxynitride, during the grinding or polishing process, the layer of silicon oxide at tops of the insulating plugs **789** is removed and the exposed bottom surfaces **789***u* are provided by the layer of silicon nitride or silicon oxynitride at the tops of the insulating plugs **789**.

[0656] Accordingly, the semiconductor substrate **124** of each of the chips **118** can be thinned to a thickness T**15**, e.g., between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 30 micrometers, between 1 and 10 micrometers, or between 1 and 5 micrometers, and preferably between 2 and 20 micrometers or between 3 and 30 micrometers. Regarding to each of the chips **118**, after the grinding or polishing process, the insulating plugs **789** and the semiconductor substrate **124** may have the same thickness T**15**. Preferably, each of the chips **118**, after the grinding or polishing process, may have a thickness, e.g., between 3 and 105 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers.

[0657] After the grinding or polishing process, the dummy substrate(s) **158** can be thinned to a thickness T**16**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers, and the encapsulation/gap filling material **138** remaining in the gaps **4***b* and **8***b* may have a vertical thickness T**17**, e.g., between 3 and 100 micrometers, and preferably between 3 and 30 micrometers or between 5 and 25 micrometers. The ground or polished surface **124***s* of the semiconductor substrate **124**, at the backside of each chip **118**, and the ground or polished

IPR2026-00067
TSMC EX1019 Page 333

surface(s) **158***s* of the dummy substrate(s) **158** can be substantially flat and not covered by the encapsulation/gap filling material **138**. The ground or polished surface(s) **158***s* may be substantially coplanar with the ground or polished surface **124***s* of each chip **118**, with the ground or polished surface **138***s* of the encapsulation/gap filling material **138** in the gaps **4***b* and **8***b*, and with the exposed bottom surfaces **789***u* of the insulating plugs **789** in the chips **118**. In each chip **118**, a vertical distance D**16** between the ground or polished surface **124***s* of the semiconductor substrate **124** and the bottom of the shallow trench isolation **345** can be, e.g., greater than 0.1 micrometers, such as between 1 and 100 micrometers, between 1 and 50 micrometers, between 1 and 25 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 0.1 and 2 micrometers.

[0658] Referring to FIG. **241**, after forming the structure illustrated in FIG. **240**, the dielectric layer **139** illustrated in FIG. **64** is formed on the surface **124***s* of the semiconductor substrate **124** of each chip **118**, on the surface(s) **158***s* of the dummy substrate(s) **158**, on the exposed bottom surfaces **789***u* of the insulating plugs **789** in the chips **118**, and on the surface **138***s* of the encapsulation/gap filling material **138**.

[0659] Next, referring to FIG. **242**, multiple through vias **156***v*, including through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**, which can be referred to as the steps illustrated in FIG. **65**, but, in the embodiment, forming the through vias **156***v* (such as the vias **156***b*-**156***f*) in the chips **118** includes etching through the insulating plugs **789** in the chips **118**. The insulating plugs **789** in the chips **118** are enclosed by the semiconductor substrates **124** of the chips **118**. The through vias **156***v* in the chips **118** pass through and are enclosed by the insulating plugs **789** in the chips **118** and expose inner walls of the insulating plugs **789**. For example, the through via **156***b* in the left one of the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the left one of the chips **118**, exposes an inner wall of the one of the insulating plugs **789**, and exposes the insulating layer **567** of the one of the insulating plugs **789**. The through via **156***c* in the left one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **118**, exposes an inner wall of the another one of the insulating plugs **789**, and exposes the insulating layer **456**, enclosed by the insulating layer **567**, of the another one of the insulating plugs **789**. The through via **156***d* in the left one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **118**, exposes an inner wall of the another one of the insulating plugs **789**, and exposes the insulating layer **567** and the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**. The through via **156***e* in the middle one of the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the middle one of the chips **118**, exposes an inner wall of the one of the insulating plugs **789**, and exposes the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The through via **156***f* in the middle one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the middle one of the chips **118**, exposes an inner wall of the another one of the insulating plugs **789**, and exposes the insulating layer **567** and the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**.

[0660] Each of the through vias **156***v*, such as the through via **156***a*, **156***b*, **156***c*, **156***d*, **156***e*, or **156***f*, has a width or a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers. For more detailed description about the through vias **156***v*, such as the through vias **156***a*-**156***f*, please refer to the illustration in FIG. **65**.

[0661] As shown in FIG. **242**, a supporter **803** provided by the insulating or dielectric layer **120**, the layer **140**, and the layers **21**, **78** and **28** of the middle one of the chips **118** is between the conduction layer **86** of the metal interconnect **2***b* and the interconnect or metal trace **75***a* in the interconnection layer **17** exposed by the through via **156***e* for the purpose of supporting the exposed interconnect or metal trace **75***a*. The supporter **803** may have a height, e.g., between 0.5 and 10 micrometers, and preferably between 1 and 5 micrometers, and a width, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 10 micrometers, 0.3 and 5 micrometers, or between 0.3 and 1 micrometers.

[0662] FIG. **243** is a first example of a schematic top perspective view showing the through via **156***e*, the insulating plug **789** enclosing the through via **156***e*, and the interconnect or metal trace **75***a* in the middle one of the chips **118** as illustrated in FIG. **242**. The schematic top perspective view shown in FIG. **243** is similar to the schematic top perspective view shown in FIG. **66** except that the through via **156***e* shown in FIG. **243** is formed within one of the insulating plugs **789** in the middle one of the chips **118**. For more detailed description about the through via **156***e* and the interconnect or metal trace **75***a* as shown in FIGS. **242** and **243**, please refer to the illustration in FIGS. **65** and **66**.

[0663] FIG. **244** is a second example of a schematic top perspective view showing the through via **156***e*, the insulating plug **789** enclosing the through via **156***e*, and the interconnect or metal trace **75***a* as illustrated in FIG. **242**. The schematic top perspective view shown in FIG. **244** is similar to the schematic top perspective view shown in FIG. **67** except that the through via **156***e* shown in FIG. **244** is formed within one of the insulating plugs **789** in the middle one of the chips **118**. For more detailed description about the through via **156***e* and the interconnect or metal trace **75***a* as shown in FIGS. **242** and **244**, please refer to the illustration in FIGS. **65** and **67**.

[0664] FIG. **245** is a third example of a schematic top perspective view showing the through via **156***e*, the insulating plug **789** enclosing the through via **156***e*, and the interconnect or metal trace **75***a* as illustrated in FIG. **242**. The schematic top perspective view shown in FIG. **245** is similar to the schematic top perspective view shown in FIG. **68** except that the through via **156***e* shown in FIG. **245** is formed within one of the insulating plugs **789** in the middle one of the chips **118**. For more detailed description about the through via **156***e* and the interconnect or metal trace **75***a* as shown in FIGS. **242** and **245**, please refer to the illustration in FIGS. **65** and **68**.

[0665] FIG. **246** is a fourth example of a schematic top perspective view showing the through via **156***e*, the insulating plug **789** enclosing the through via **156***e*, and the interconnect or metal trace **75***a* as illustrated in FIG. **242**. The schematic top perspective view shown in FIG. **246** is similar to the schematic top perspective view shown in FIG. **66**A except that the through via **156***e* shown in FIG. **246** is formed within one of the insulating plugs **789** in the middle one of the chips **118**. For more detailed description about the through via **156***e*

IPR2026-00067
TSMC EX1019 Page 334

and the interconnect or metal trace **75***a* as shown in FIG. **246**, please refer to the illustration in FIG. **66**A.

[0666] Referring to FIG. **247**, after forming the structure illustrated in FIG. **242**, multiple trenches **139***t* are formed in the dielectric layer **139**. The trenches **139***t* in the dielectric layer **139** have a depth D**9**, e.g., between 0.1 and 5 micrometers, and preferably between 0.5 and 3 micrometers. The dielectric layer **139** under the trenches **139***t* has a remaining thickness T**20**, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 5 micrometers, between 0.5 and 2 micrometers, between 0.1 and 3 micrometers, or between 0.2 and 1.5 micrometers. The steps of forming the trenches **139***t* in the dielectric layer **139** can be referred to as the steps of forming the trenches **60***t* in the dielectric layer **60** as illustrated in FIGS. **153-155**. The trenches **139***t* formed in the dielectric layer **139** are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. Also, FIG. **179** can be an example of a schematic top perspective view showing the trenches **139***t* and the through vias **156***v* shown in FIG. **247**, and FIG. **247** also can be a cross-sectional view cut along the line K-K shown in FIG. **179**.

[0667] Alternatively, the trenches **139***t* illustrated in FIG. **247** can be formed in the dielectric layer **139** before the through vias **156***v* illustrated in FIG. **242** are formed in the chips **118** and the dummy substrate(s) **158**. Specifically, after the dielectric layer **139** is formed on the surfaces **124***s*, **138***s*, **158***s* and **789***u* as shown in FIG. **241**, the trenches **139***t* illustrated in FIG. **247** are formed in the dielectric layer **139**, and then the through vias **156***v* illustrated in FIG. **242** are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**.

[0668] Alternatively, referring to FIG. **248**, the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* as shown in FIG. **247** can be formed by the following steps. After forming the structure illustrated in FIG. **240**, an insulating layer **139***a*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness C**5**, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.15 and 2 micrometers, is formed on the surface **124***s* of the semiconductor substrate **124** of each chip **118**, on the surface(s) **158***s* of the dummy substrate(s) **158**, on the exposed bottom surfaces **789***u* of the insulating plugs **789** in the chips **118**, and on the surface **138***s* of the encapsulation/gap filling material **138** as shown in FIG. **240**.

[0669] Next, a polymer layer **139***b*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO), is formed on the insulating layer **139***a* using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, an exposure process and a development process can be employed to form the trenches **139***t*, exposing the insulating layer **139***a*, in the polymer layer **139***b*. A 1X stepper or 1X contact aligner can be used to expose the polymer layer **139***b* during the exposure process. Next, the polymer layer **139***b* is cured or heated at a temperature between 150 degrees centigrade and 400 degrees centigrade, and preferably between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **139***b* after being cured or heated has a thickness C**6**, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0670] Next, a photoresist layer is formed on the insulating layer **139***a* exposed by the trenches **139***t* and on the polymer layer **139***b*, and multiple openings in the photoresist layer expose the insulating layer **139***a* at bottoms of the trenches **139***t*. Next, the insulating layer **139***a* under the openings in the photoresist layer is removed using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **158** under the openings in the photoresist layer and the chips **118** under the openings in the photoresist layer are etched away until predetermined regions of the layers **17** and **19** in the chips **118** and predetermined regions of the conduction layer **86** of the metal interconnects **2** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **156***v*, including the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**. The specifications of the through vias **156***v* and the supporter **803** shown in FIG. **248** can be referred to as the specifications of the through vias **156***v* and the supporter **803**, respectively, illustrated in FIGS. **242-246**.

[0671] Accordingly, using the above-mentioned steps, the above-mentioned dielectric layer **139** also can be provided with the insulating layer **139***a* and the polymer layer **139***b* on the insulating layer **139***a*. The trenches **139***t* in the polymer layer **139***b* expose the insulating layer **139***a* and are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The through vias **156***v* are formed under the trenches **139***t*. Also, FIG. **179** can be an example of a schematic top perspective view showing the trenches **139***t* and the through vias **156***v* shown in FIG. **248**, and FIG. **248** also can be a cross-sectional view cut along the line K-K shown in FIG. **179**.

[0672] Referring to FIG. **249**, after forming the structure illustrated in FIG. **247** or in FIG. **248**, multiple metal interconnects (or damascene metal traces) **3**, including metal interconnects (or damascene metal traces) **3***a*, **3***b* and **3***c*, are formed in the trenches **139***t*, and multiple metal plugs (or metal vias) **7***p* are formed in the through vias **156***v*. The metal plugs **7***p* include metal plugs (or metal vias) **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, respectively. The metal plug **7***a* is formed in the dummy substrate **158**. The metal plugs **7***b*, **7***c* and **7***d* are formed in the left one of the chips **118**, and the metal plugs **7***e* and **7***f* are formed in the middle one of the chips **118**. The supporter **803** and the interconnect or metal trace **75***a*, in the interconnection layer **17**, on the supporter **803** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **17** is positioned, of the metal plug **7***e*.

[0673] The metal interconnects **3** in the trenches **139***t* and the metal plugs **7***p* in the through vias **156***v* can be formed by the following steps. First, the adhesion/barrier layer **125***a* illustrated in FIG. **75** is formed on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on sidewalls of the through vias **156***v*, on sidewalls and bottoms of the trenches **139***t* (or on sidewalls of the trenches **139***t* in the polymer layer **139***b* and on a top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), on the inner walls, exposed by the through vias **156***v*, of the insulating plugs **789**, and on the interconnect or metal trace **75***a* that is on the supporter **803** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition pro-

cesses, such as atomic layer deposition (ALD). Next, the seed layer **125***b* illustrated in FIG. **75** is formed on the adhesion/barrier layer **125***a*, in the through vias **156***v*, and in the trenches **139***t* by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, the conduction layer **125***c* illustrated in FIG. **75** is formed on the seed layer **125***b*, in the through vias **156***v*, and in the trenches **139***t* by using a suitable process, such as electroplating process. Next, the layers **125***a*, **125***b* and **125***c* are ground or polished using, e.g., a chemical-mechanical-polishing (CMP) process, a mechanical polishing process, a mechanical grinding process, or a process including mechanical polishing and chemical etching until the dielectric layer **139** has an exposed top surface **139***s*, over which there are no portions of the layers **125***a*, **125***b* and **125***c*, and the layers **125***a*, **125***b* and **125***c* outside the trenches **139***t* are removed. Accordingly, the layers **125***a*, **125***b* and **125***c* in the trenches **139***t* compose the metal interconnects **3**, including the metal interconnects **3***a*, **3***b* and **3***c*, in the trenches **139***t*. The layers **125***a*, **125***b* and **125***c* in the through vias **156***v* compose the metal plugs **7***p* in the through vias **156***v*, including the metal plugs **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f*, respectively. The adhesion/barrier layer **125***a* and the seed layer **125***b* are at sidewalls and a bottom of the conduction layer **125***c* in the trenches **139***t*, and the sidewalls and the bottom of the conduction layer **125***c* in the trenches **139***t* are covered by the adhesion/barrier layer **125***a* and the seed layer **125***b*.

[0674] In a first alternative, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the adhesion/barrier layer **125***a* can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t* (or on the sidewalls of the trenches **139***t* in the polymer layer **139***b* and on the top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewalls of the through vias **156***v*, on the inner walls of the insulating plugs **789** in the chips **118**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer, in the trenches **139***t*, and in the through vias **156***v*. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **241**-**247**. Alternatively, the electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **248**.

[0675] In a second alternative, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the adhesion/barrier layer **125***a* can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t* (or on the sidewalls of the trenches **139***t* in the polymer layer **139***b* and on the top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewalls of the through vias **156***v*, on the inner walls of the insulating plugs **789** in the chips **118**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer, in the trenches **139***t*, and in the through vias **156***v*. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **241**-**247**. Alternatively, the electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **248**.

[0676] In a third alternative, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the adhesion/barrier layer **125***a* can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls and bottoms of the trenches **139***t* (or on the sidewalls of the trenches **139***t* in the polymer layer **139***b* and on the top surface of the insulating layer **139***a* at the bottoms of the trenches **139***t*), on the layers **17**, **19** and **86** at the bottoms of the through vias **156***v*, on the sidewalls of the through vias **156***v*, on the inner walls of the insulating plugs **789** in the chips **118**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. The seed layer **125***b* can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer, in the trenches **139***t*, and in the through vias **156***v*. The conduction layer **125***c* can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **139***t*, and in the through vias **156***v*. The electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 0.3 and 1.5 micrometers or between 0.5 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **241**-**247**. Alternatively, the electroplated copper layer in the trenches **139***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the

IPR2026-00067
TSMC EX1019 Page 336

layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **248**.

[0677] The exposed top surface **139***s* of the dielectric layer **139** can be substantially coplanar with the ground or polished surface **227** of the conduction layer **125***c* in the trenches **139***t*, and the surfaces **139***s* and **227** can be substantially flat. After the layers **125***a*, **125***b* and **125***c* are ground or polished, the dielectric layer **139** may have a thickness, between the exposed top surface **139***s* and the surface **124***s* or **158***s*, e.g., between 1 and 10 micrometers, and preferably between 1 and 3 micrometers, in case the dielectric layer **139**, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIGS. **241-247**. Alternatively, after the layers **125***a*, **125***b* and **125***c* are ground or polished, the polymer layer **139***b* of the dielectric layer **139** may have a thickness, between the exposed top surface **139***s* of the polymer layer **139***b* and the top surface of the insulating layer **139***a*, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers, in case the dielectric layer **139** composed of the layers **139***a* and **139***b*, the trenches **139***t*, and the through vias **156***v* are formed as illustrated in FIG. **248**.

[0678] Each of the metal plugs **7***p* in the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the chips **118** and contacts the inner wall of the one of the insulating plugs **789**. For example, the metal plug **7***b* in the left one of the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the left one of the chips **118**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **567** of the one of the insulating plugs **789**. The metal plug **7***c* in the left one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **118**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**. The metal plug **7***d* in the left one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **118**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** and the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**. The metal plug **7***e* in the middle one of the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the middle one of the chips **118**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The metal plug **7***f* in the middle one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the middle one of the chips **118**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** and the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**. For more detailed description about the metal plugs **7***p* (including the metal plugs **7***a*-**7***f*) and the metal interconnects **3** (including the metal interconnects **3***a*, **3***b* and **3***c*) shown in FIG. **249**, please refer to the illustration in FIG. **76**.

[0679] Alternatively, the element **118** not only can indicate a chip, but also can indicate a wafer. When the element **118** is a wafer, the element **72** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0680] Referring to FIG. **250**, after forming the structure illustrated in FIG. **249**, the following steps can be subsequently performed as illustrated in FIGS. **77-81**, and then a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **556***a* and **556***b*.

[0681] The system-in package or multichip module **556***a* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **251**, the system-in package or multichip module **556***a* can be bonded with a top side of a carrier **176** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, an under fill **174** can be formed between the polymer layer **136** of the system-in package or multichip module **556***a* and the top side of the carrier **176** and encloses the solder bumps or balls **126**. Next, multiple solder balls **178** can be formed on a bottom side of the carrier **176**. The specifications of the carrier **176**, the under fill **174**, and the solder balls **178** shown in FIG. **251** can be referred to as the specifications of the carrier **176**, the under fill **174**, and the solder balls **178** as illustrated in FIG. **83**, respectively.

[0682] FIG. **252** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After forming the structure illustrated in FIG. **249**, the steps as illustrated in FIGS. **77-79** can be subsequently performed. Next, forming metal bumps **668** on the polymer layer **136** and on the contact points, at the bottoms of the openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** can be referred to as the steps illustrated in FIG. **84**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **556***c*. In the system-in package or multichip module **556***c*, each of the interconnects **3** can be connected to one or more of the metal bumps **668**.

[0683] The system-in package or multichip module **556***c* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **253**, the system-in package or multichip module **556***c* can be bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Alternatively, the metal joints **180** can be a gold layer having a thickness

IPR2026-00067
TSMC EX1019 Page 337

between 0.1 and 10 micrometers. Next, the under fill **174** illustrated in FIG. **83** can be formed between the polymer layer **136** of the system-in package or multichip module **556***c* and the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** can be formed on the bottom side of the carrier **176**.

[0684] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **250-253** can be omitted. In this case, the polymer layer **136** is formed on the surfaces **227** and **139***s*, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0685] FIG. **254** shows a multichip package **566***f* including a system-in package or multichip module **556***d* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**, which can be formed by, e.g., the following steps.

[0686] After forming the structure illustrated in FIG. **249**, the steps illustrated in FIG. **86** are performed to form an insulating or dielectric layer **122** on the ground or polished surface **227** of the conduction layer **125***c* and on the exposed top surface **139***s* of the dielectric layer **139**, to form multiple metal interconnects or traces **300** on the insulating or dielectric layer **122** and on multiple regions, exposed by multiple openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**, and to form a polymer layer **136** on the insulating or dielectric layer **122** and on the metal interconnects or traces **300**. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers, and multiple openings **136***a* in the polymer layer **136** expose multiple contact points of the metal interconnects or traces **300**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize a plurality of the system-in package or multichip module **556***d*.

[0687] Next, the plurality of the system-in package or multichip module **556***d* can be joined with a carrier **176** by, e.g., forming a glue layer **182** with a thickness between 20 and 150 micrometers on a top side of the carrier **176**, and then attaching the plurality of the system-in package or multichip module **556***d* to the top side of the carrier **11** using the glue layer **182**. The glue layer **182** can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), poly-phenylene oxide (PPO), silosane, or SU-8, with a thickness, e.g., between 20 and 150 micrometers. Next, multiple wires **184**, such as gold wires, copper wires, or aluminum wires, can be wirebonded onto the top side of the carrier **176** and onto the contact points, exposed by the openings **136***a* in the polymer layer **136**, of the conduction layer **150** of the metal interconnects or traces **300** by a wirebonding process. Accordingly, the metal interconnects or traces **300** of the plurality of the system-in package or multichip module **556***d* can be physically and electrically connected to the carrier **176** through the wirebonded wires **184**. Next, a molding compound **186** can be formed on the plurality of the system-in package or multichip module **556***d*, on the top side of the carrier **176**, and on the wirebonded wires **184**, encapsulating the wirebonded wires **184** and the plurality of the system-in package or multichip module **556***d*, by a molding process. The molding compound **186** may include epoxy, carbon filler or glass filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, the solder balls **178** illustrated in FIG. **83** can be formed on a bottom side of the carrier **176**. Thereafter, a singulation process can be performed to cut the carrier **176** and the molding compound **186** and to singularize a plurality of the multichip package **566***f*. The multichip package **566***f* can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**. The specifications of the carrier **176** shown in FIG. **254** can be referred to as the specifications of the carrier **176** as illustrated in FIG. **83**.

[0688] FIGS. **255-270** show a process for forming another system-in package or multichip module according to another embodiment of the present disclosure. Referring to FIG. **255**, after forming the structure illustrated in FIG. **215**, the dielectric layer **60** illustrated in FIG. **186** is formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, on the exposed bottom surfaces **789***s* of the insulating plugs **789** in the chips **68**, and on the surface **64***s* of the encapsulation/gap filling material **64**. Next, multiple through vias **170***v*, including through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**. The steps of forming the through vias **170***v* in the chips **68** and in the dummy substrate(s) **62** illustrated in FIG. **255** can be referred to as the steps of forming the through vias **170***v* in the chips **68** and in the dummy substrate(s) **62** as illustrated in FIG. **15**, but, in the embodiment, forming the through vias **170***v* (such as the vias **170***b*-**170***f*) in the chips **68** includes etching through the insulating plugs **789** in the chips **68**. The specifications of the through vias **170***v* (including the vias **170***a*-**170***f*), the insulating plugs **789** enclosing the through vias **170***v*, and the supporter **801** shown in FIG. **255** can be referred to as the specifications of the through vias **170***v* (including the vias **170***a*-**170***f*), the insulating plugs **789** enclosing the through vias **170***v*, and the supporter **801**, respectively, illustrated in FIGS. **219-223**.

[0689] Next, referring to FIG. **256**, the adhesion/barrier layer **52** illustrated in FIG. **90** is formed on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on sidewalls of the through vias **170***v*, on the dielectric layer **60**, on the inner walls, exposed by the through vias **170***v*, of the insulating plugs **789**, and on the interconnect or metal trace **35***a* that is on the supporter **801**. Next, the seed layer **54** illustrated in FIG. **90** is formed on the adhesion/barrier layer **52** and in the through vias **170***v*. Next, a photoresist layer **194** is formed on the seed layer **54** by using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **194***a*, exposing multiple regions of the seed layer **54**, in the photoresist layer **194**. The patterned photoresist layer **194** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, the conduction layer **56** illustrated in FIG. **90** is formed on the regions, exposed by the openings **194***a* in the layer **194**, of the seed layer **54**.

[0690] Next, referring to FIG. **257**, the photoresist layer **194** is removed using, e.g., an organic chemical solution. Next, the seed layer **54** not under the conduction layer **56** is removed by using a wet etching process or a dry etching process. Next, the adhesion/barrier layer **52** not under the conduction layer **56** is removed by using a wet etching process or a dry etching process. Accordingly, the layers **52**, **54** and **56** over the dielectric layer **60** and over the through vias **170***v* compose multiple metal interconnects **1**, including metal interconnects **1***a* and **1***b*, over the dielectric layer **60** and over the through vias **170***v*. The adhesion/barrier layer **52** and the seed layer **54** of the metal interconnects **1** over the dielectric layer **60** are not at any sidewall **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**, but under a bottom of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60**. The sidewalls **1***w* of the conduction layer **56** of the metal interconnects **1** over the dielectric layer **60** are not covered by the layers **52** and **54**. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f* as shown in FIG. **255**, respectively. The metal plug **5***a* is formed in the dummy substrate **62**, and the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* are formed in the same chip **68**. These metal plugs **5***p* formed in the chips **68** and in the dummy substrate(s) **62** can connect the metal interconnects **1** and the semiconductor devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**. The supporter **801** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **801** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***e*.

[0691] Each of the metal plugs **5***p* in the chips **68** passes through one of the insulating plugs **789** in the chips **68**, contacts the inner wall of the one of the insulating plugs **789**, and is enclosed by the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. For example, each of the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in one of the chips **68** passes through one of the insulating plugs **789** in the one of the chips **68**, contacts the inner wall of the one of the insulating plugs **789**, and is enclosed by the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. For more detailed description about the metal plugs **5***p* (including the metal plugs **5***a*-**5***f*) and the metal interconnects **1** (including the metal interconnects **1***a* and **1***b*) shown in FIG. **257**, please refer to the illustration in FIG. **91**.

[0692] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0693] Referring to FIG. **258**, after forming the structure illustrated in FIG. **257**, an insulating or dielectric layer **66** is formed on the conduction layer **56** of the metal interconnects **1**, on the dielectric layer **60**, and in gaps between the metal interconnects **1**. The insulating or dielectric layer **66**, for example, may include or can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polyphenylene oxide (PPO), or polybenzoxazole (PBO), on the conduction layer **56** of the metal interconnects **1**, on the dielectric layer **60**, and in the gaps between the metal interconnects **1**. The polymer layer on the conduction layer **56** may have a thickness, e.g., between 0.1 and 50 micrometers, and preferably between 1 and 30 micrometers, between 2 and 20 micrometers, or between 5 and 10 micrometers.

[0694] Alternatively, the insulating or dielectric layer **66** may include or can be an inorganic layer, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, on the conduction layer **56** of the metal interconnects **1**, on the dielectric layer **60**, and in the gaps between the metal interconnects **1**. The inorganic layer on the conduction layer **56** may have a thickness, e.g., between 0.1 and 10 micrometers, and preferably between 0.1 and 1 micrometers, between 0.2 and 2 micrometers, between 0.3 and 3 micrometers, or between 0.5 and 5 micrometers.

[0695] Alternatively, referring to FIG. **259**, the insulating or dielectric layer **66** as shown in FIG. **258** can be formed by the following steps. First, a polymer layer **66***a*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), is formed on the conduction layer **56** of the metal interconnects **1**, on the dielectric layer **60**, and in the gaps between the metal interconnects **1**. Next, the polymer layer **66***a* is ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching, until the conduction layer **56** of the metal interconnects **1** has a top surface **56***u* not covered by the polymer layer **66***a*. Accordingly, the polymer layer **66***a* remains on the dielectric layer **60** and in the gaps between the metal interconnects **1** and has a thickness, e.g., greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers. The ground or polished surface **66***s* of the polymer layer **66***a* can be substantially flat and substantially coplanar with the top surface **56***u* of the conduction layer **56**. Next, an inorganic layer **66***b*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness, e.g., between 0.1 and 3 micrometers, and preferably between 0.2 and 1.5 micrometers, is formed on the top surface **56***u* of the conduction layer **56** and on the ground or polished surface **66***s* of the polymer layer **66***a*. Accordingly, the insulating or dielectric layer **66** as shown in FIG. **258** also can be provided with the polymer layer **66***a* and the inorganic layer **66***b* as shown in FIG. **259**.

[0696] Referring to FIG. **260**, after forming the insulating or dielectric layer **66**, the following steps can be subsequently performed as illustrated in FIGS. **228** and **229** to place the chips **72**, each of which is like the chip **72***a* or **72***b* illustrated in FIG. **212**M, and the previously described dummy substrate (s) **165** over the layer **116** formed on the layer **66**, to form the encapsulation/gap filling material **98** on the backside of the semiconductor substrate **96** of each chip **72**, on the dummy substrate(s) **165**, and in the gaps **4***a* and **8***a*, and to grind or polish the encapsulation/gap filling material **98**, the backside of the semiconductor substrate **96** of each chip **72**, and the dummy substrate(s) **165** until all of the insulating plugs **789** in the chips **72** have the exposed bottom surfaces **789***t*, over which there are no portions of the semiconductor substrates **96**.

[0697] Next, referring to FIG. **261**, the dielectric layer **88** illustrated in FIG. **195** is formed on the surface **96***s* of the semiconductor substrate **96** of each chip **72**, on the surface(s) **165***s* of the dummy substrate(s) **165**, on the exposed bottom

surfaces **789***t* of the insulating plugs **789** in the chips **72**, and on the surface **98***s* of the encapsulation/gap filling material **98**. Next, multiple through vias **164***v*, including through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e*, are formed in the chips **72** and in the dummy substrate(s) **165**, exposing the conduction layer **56** of the metal interconnects **1** and exposing the layers **114** and **106** of the chips **72**. The steps of forming the through vias **164***v* in the chips **72** and in the dummy substrate(s) **165** illustrated in FIG. **261** can be referred to as the steps of forming the through vias **164***v* in the chips **72** and in the dummy substrate(s) **165** as illustrated in FIG. **41**, but, in the embodiment, forming the through vias **164***v* (such as the vias **164***b*-**164***e*) in the chips **72** includes etching through the insulating plugs **789** in the chips **72**. The specifications of the through vias **164***v* (including the vias **164***a*-**164***e*), the insulating plugs **789** enclosing the through vias **164***v*, and the supporter **802** shown in FIG. **261** can be referred to as the specifications of the through vias **164***v* (including the vias **164***a*-**164***e*), the insulating plugs **789** enclosing the through vias **164***v*, and the supporter **802**, respectively, illustrated in FIGS. **231**-**235**.

[0698] Next, referring to FIG. **262**, the adhesion/barrier layer **92** illustrated in FIG. **95** is formed on the layers **56**, **106** and **114** exposed by the through vias **164***v*, on sidewalls of the through vias **164***v*, on the dielectric layer **88**, on the inner walls, exposed by the through vias **164***v*, of the insulating plugs **789** in the chips **72**, and on the interconnect or metal trace **55***a* that is on the supporter **802**. Next, the seed layer **94** illustrated in FIG. **95** is formed on the adhesion/barrier layer **92** and in the through vias **164***v*. Next, a photoresist layer **294** is formed on the seed layer **94** by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **294***a*, exposing multiple regions of the seed layer **94**, in the photoresist layer **294**. The patterned photoresist layer **294** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, the conduction layer **86** illustrated in FIG. **95** is formed on the regions, exposed by the openings **294***a* in the layer **294**, of the seed layer **94**.

[0699] Next, referring to FIG. **263**, the photoresist layer **294** is removed using, e.g., an organic chemical solution. Next, the seed layer **94** not under the conduction layer **86** is removed by using a wet etching process or a dry etching process. Next, the adhesion/barrier layer **92** not under the conduction layer **86** is removed by using a wet etching process or a dry etching process. Accordingly, the layers **92**, **94** and **86** over the dielectric layer **88** and over the through vias **164***v* compose multiple metal interconnects **2**, including metal interconnects **2***a* and **2***b*, over the dielectric layer **88** and over the through vias **164***v*. The adhesion/barrier layer **92** and the seed layer **94** of the metal interconnects **2** over the dielectric layer **88** are not at any sidewall **2***w* of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88**, but under a bottom of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88**. The sidewalls **2***w* of the conduction layer **86** of the metal interconnects **2** over the dielectric layer **88** are not covered by the layers **92** and **94**. The layers **92**, **94** and **86** in the through vias **164***v* compose multiple metal plugs (or metal vias) **6***p* in the through vias **164***v*, including metal plugs (or metal vias) **6***a*, **6***b*, **6***c*, **6***d* and **6***e* in the through vias **164***a*, **164***b*, **164***c*, **164***d* and **164***e* as shown in FIG. **261**, respectively. The metal plug **6***a* is formed in the dummy substrate **165**, the metal plugs **6***b* and **6***c* are formed in the left one of the chips **72**, and the metal plugs **6***d* and **6***e* are formed in the middle one of the chips **72**. The supporter **802** and the interconnect or metal trace **55***a*, in the interconnection layer **106**, on the supporter **802** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **106** is positioned, of the metal plug **6***e*. These metal plugs **6***p* formed in the chips **72** and in the dummy substrate(s) **165** can connect the metal interconnects **2** and the semiconductor devices **102** in the chips **72** and connect the metal interconnects **1** and **2**.

[0700] Each of the metal plugs **6***p* in the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the chips **72** and contacts the inner wall of the one of the insulating plugs **789**. For example, the metal plug **6***b* in the left one of the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the left one of the chips **72**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The metal plug **6***c* in the left one of the chips **72** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **72**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** of the another one of the insulating plugs **789**. The metal plug **6***d* in the middle one of the chips **72** passes through and is enclosed by one of the insulating plugs **789** in the middle one of the chips **72**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The metal plug **6***e* in the middle one of the chips **72** passes through and is enclosed by another one of the insulating plugs **789** in the middle one of the chips **72**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** of the another one of the insulating plugs **789**. For more detailed description about the metal plugs **6***p* (including the metal plugs **6***a*-**6***e*) and the metal interconnects **2** (including the metal interconnects **2***a* and **2***b*) shown in FIG. **263**, please refer to the illustration in FIG. **96**.

[0701] Alternatively, the element **72** not only can indicate a chip, but also can indicate a wafer. When the element **72** is a wafer, the element **68** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0702] Next, referring to FIG. **264**, an insulating or dielectric layer **120** is formed on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in gaps between the metal interconnects **2**. The insulating or dielectric layer **120**, for example, may include or can be a polymer layer, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, poly-phenylene oxide (PPO), or polybenzoxazole (PBO), on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in the gaps between the metal interconnects **2**. The polymer layer on the conduction layer **86** may have a thickness, e.g., between 0.1 and 50 micrometers, and preferably between 1 and 30 micrometers, between 2 and 20 micrometers, or between 5 and 10 micrometers.

[0703] Alternatively, the insulating or dielectric layer **120** may include or can be an inorganic layer, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in the gaps between the metal interconnects **2**. The inorganic

layer on the conduction layer **86** may have a thickness, e.g., between 0.1 and 10 micrometers, and preferably between 0.1 and 1 micrometers, between 0.2 and 2 micrometers, between 0.3 and 3 micrometers, or between 0.5 and 5 micrometers.

[0704] Alternatively, referring to FIG. **265**, the insulating or dielectric layer **120** as shown in FIG. **264** can be formed by the following steps. First, a polymer layer **120***a*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polyphenylene oxide (PPO), or polybenzoxazole (PBO), is formed on the conduction layer **86** of the metal interconnects **2**, on the dielectric layer **88**, and in the gaps between the metal interconnects **2**. Next, the polymer layer **120***a* is ground or polished by a suitable process, such as mechanical grinding process, mechanical polishing process, chemical-mechanical-polishing (CMP) process, or a process including mechanical polishing and chemical etching, until the conduction layer **86** of the metal interconnects **2** has a top surface **86***u* not covered by the polymer layer **120***a*. Accordingly, the polymer layer **120***a* remains on the dielectric layer **88** and in the gaps between the metal interconnects **2** and has a thickness, e.g., greater than 1 micrometer, such as between 1 and 20 micrometers, and preferably between 1 and 10 micrometers, between 1 and 5 micrometers, or between 2 and 20 micrometers. The ground or polished surface **120***s* of the polymer layer **120***a* can be substantially flat and substantially coplanar with the top surface **86***u* of the conduction layer **86**. Next, an inorganic layer **120***b*, such as a layer of silicon oxide, silicon nitride, silicon carbon nitride, silicon oxynitride, or silicon oxycarbide, having a thickness, e.g., between 0.1 and 3 micrometers, and preferably between 0.2 and 1.5 micrometers, is formed on the top surface **86***u* of the conduction layer **86** and on the ground or polished surface **120***s* of the polymer layer **120***a*. Accordingly, the insulating or dielectric layer **120** as shown in FIG. **264** also can be provided with the polymer layer **120***a* and the inorganic layer **120***b* as shown in FIG. **265**.

[0705] Referring to FIG. **266**, after forming the insulating or dielectric layer **120**, the following steps can be subsequently performed as illustrated in FIGS. **239** and **240** to place the chips **118**, each of which is like the chip **118***a* or **118***b* illustrated in FIG. **212**N, and the previously described dummy substrate(s) **158** over the layer **140** formed on the layer **120**, to form the encapsulation/gap filling material **138** on the backside of the semiconductor substrate **124** of each chip **118**, on the dummy substrate(s) **158**, and in the gaps **4***b* and **8***b*, and to grind or polish the encapsulation/gap filling material **138**, the backside of the semiconductor substrate **124** of each chip **118**, and the dummy substrate(s) **158** until all of the insulating plugs **789** in the chips **118** have the exposed bottom surfaces **789***u*, over which there are no portions of the semiconductor substrates **124**.

[0706] Next, referring to FIG. **267**, the dielectric layer **139** illustrated in FIG. **204** is formed on the surface **124***s* of the semiconductor substrate **124** of each chip **118**, on the surface (s) **158***s* of the dummy substrate(s) **158**, on the exposed bottom surfaces **789***u* of the insulating plugs **789** in the chips **118**, and on the surface **138***s* of the encapsulation/gap filling material **138**. Next, multiple through vias **156***v*, including through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e*, and **156***f*, are formed in the chips **118** and in the dummy substrate(s) **158**, exposing the conduction layer **86** of the metal interconnects **2** and exposing the layers **17** and **19** of the chips **118**. The steps of forming the through vias **156***v* in the chips **118** and in the dummy substrate (s) **158** illustrated in FIG. **267** can be referred to as the steps of forming the through vias **156***v* in the chips **118** and in the dummy substrate(s) **158** as illustrated in FIG. **65**, but, in the embodiment, forming the through vias **156***v* (such as the vias **156***b*-**156***f*) in the chips **118** includes etching through the insulating plugs **789** in the chips **118**. The specifications of the through vias **156***v* (including the vias **156***a*-**156***f*), the insulating plugs **789** enclosing the through vias **156***v*, and the supporter **803** shown in FIG. **267** can be referred to as the specifications of the through vias **156***v* (including the vias **156***a*-**156***f*), the insulating plugs **789** enclosing the through vias **156***v*, and the supporter **803**, respectively, illustrated in FIGS. **242**-**246**.

[0707] Next, referring to FIG. **268**, the adhesion/barrier layer **125***a* illustrated in FIG. **100** is formed on the layers **17**, **19** and **86** exposed by the through vias **156***v*, on sidewalls of the through vias **156***v*, on the dielectric layer **139**, on the inner walls, exposed by the through vias **156***v*, of the insulating plugs **789** in the chips **118**, and on the interconnect or metal trace **75***a* that is on the supporter **803**. Next, the seed layer **125***b* illustrated in FIG. **100** is formed on the adhesion/barrier layer **125***a* and in the through vias **156***v*. Next, a photoresist layer **394** is formed on the seed layer **125***b* by using, e.g., a spin coating process, a screen printing process, or a lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings **394***a*, exposing multiple regions of the seed layer **125***b*, in the photoresist layer **394**. The patterned photoresist layer **394** may have a thickness, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers or between 1 and 10 micrometers. Next, the conduction layer **125***c* illustrated in FIG. **100** is formed on the regions, exposed by the openings **394***a* in the layer **394**, of the seed layer **125***b*.

[0708] Next, referring to FIG. **269**, the photoresist layer **394** is removed using, e.g., an organic chemical solution. Next, the seed layer **125***b* not under the conduction layer **125***c* is removed by using a wet etching process or a dry etching process. Next, the adhesion/barrier layer **125***a* not under the conduction layer **125***c* is removed by using a wet etching process or a dry etching process. Accordingly, the layers **125***a*, **125***b* and **125***c* over the dielectric layer **139** and over the through vias **156***v* compose multiple metal interconnects **3**, including metal interconnects **3***a*, **3***b* and **3***c*, over the dielectric layer **139** and over the through vias **156***v*. The adhesion/barrier layer **125***a* and the seed layer **125***b* of the metal interconnects **3** over the dielectric layer **139** are not at any sidewall **3***w* of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139**, but under a bottom of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139**. The sidewalls **3***w* of the conduction layer **125***c* of the metal interconnects **3** over the dielectric layer **139** are not covered by the layers **125***a* and **125***b*. The layers **125***a*, **125***b* and **125***c* in the through vias **156***v* compose multiple metal plugs (or metal vias) **7***p* in the through vias **156***v*, including metal plugs (or metal vias) **7***a*, **7***b*, **7***c*, **7***d*, **7***e* and **7***f* in the through vias **156***a*, **156***b*, **156***c*, **156***d*, **156***e* and **156***f* as shown in FIG. **267**, respectively. The metal plug **7***a* is formed in the dummy substrate **158**. The metal plugs **7***b*, **7***c* and **7***d* are formed in the left one of the chips **118**, and the metal plugs **7***e* and **7***f* are formed in the middle one of the chips **118**. These metal plugs **7***p* formed in the chips **118** and in the dummy substrate(s) **158** can connect the metal interconnects **3** and the semiconductor devices **13** in the chips **118** and connect the metal interconnects **2** and **3**. The supporter **803** and the interconnect or metal trace **75***a*, in the interconnection layer **17**, on the supporter **803** can be between two portions, lower than a

IPR2026-00067
TSMC EX1019 Page 341

horizontal level, at which a top surface of the interconnection layer **17** is positioned, of the metal plug **7***e*.

[0709] Each of the metal plugs **7***p* in the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the chips **118** and contacts the inner wall of the one of the insulating plugs **789**. For example, the metal plug **7***b* in the left one of the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the left one of the chips **118**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **567** of the one of the insulating plugs **789**. The metal plug **7***c* in the left one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **118**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**. The metal plug **7***d* in the left one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the left one of the chips **118**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** and the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**. The metal plug **7***e* in the middle one of the chips **118** passes through and is enclosed by one of the insulating plugs **789** in the middle one of the chips **118**, contacts the inner wall of the one of the insulating plugs **789**, and contacts the insulating layer **456**, enclosed by the insulating layer **567**, of the one of the insulating plugs **789**. The metal plug **7***f* in the middle one of the chips **118** passes through and is enclosed by another one of the insulating plugs **789** in the middle one of the chips **118**, contacts the inner wall of the another one of the insulating plugs **789**, and contacts the insulating layer **567** and the insulating layer **456**, enclosed by the layer **567**, of the another one of the insulating plugs **789**. For more detailed description about the metal plugs **7***p* (including the metal plugs **7***a*-**7***f*) and the metal interconnects **3** (including the metal interconnects **3***a*, **3***b* and **3***c*) shown in FIG. **269**, please refer to the illustration in FIG. **101**.

[0710] Alternatively, the element **118** not only can indicate a chip, but also can indicate a wafer. When the element **118** is a wafer, the element **72** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0711] Referring to FIG. **270**, after forming the structure illustrated in FIG. **269**, the following steps can be subsequently performed as illustrated in FIG. **102** to form the insulating or dielectric layer **122** on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in the gaps between the metal interconnects **3**, to form the polymer layer **136** on the insulating or dielectric layer **122**, and to form multiple openings **136***a*, exposing multiple regions of the insulating or dielectric layer **122**, in the polymer layer **136**. Next, forming an under bump metallurgic (UBM) layer **666** on the polymer layer **136** and on multiple contact points, at bottoms of multiple openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** and forming multiple solder bumps or balls **126** on the UBM layer **666** can be referred to as the steps illustrated in FIGS. **78**-**81**. Next, a singulation process is performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in packages or multichip modules **556***e* and **556***f*.

[0712] The system-in package or multichip module **556***e* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the solder bumps or balls **126**. For example, referring to FIG. **271**, the system-in package or multichip module **556***e* is bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder bumps or balls **126** with a solder or gold layer preformed on the top side of the carrier **176**. Next, the under fill **174** illustrated in FIG. **83** is formed between the polymer layer **136** of the system-in package or multichip module **556***e* and the top side of the carrier **176** and encloses the solder bumps or balls **126**. Next, the solder balls **178** illustrated in FIG. **83** are formed on the bottom side of the carrier **176**.

[0713] FIG. **272** shows another system-in package or multichip module according to another embodiment of the present disclosure, which can be formed by the following steps. After forming the structure illustrated in FIG. **269**, the following steps can be subsequently performed as illustrated in FIG. **102** to form the insulating or dielectric layer **122** on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in the gaps between the metal interconnects **3**, to form the polymer layer **136** on the insulating or dielectric layer **122**, and to form multiple openings **136***a*, exposing multiple regions of the insulating or dielectric layer **122**, in the polymer layer **136**. Next, the steps illustrated in FIGS. **78** and **79** can be subsequently performed. Next, forming metal bumps **668** on the polymer layer **136** and on contact points, at bottoms of openings in the insulating or dielectric layer **122** and under the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3** can be referred to as the steps illustrated in FIG. **84**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as system-in package or multichip module **556***g*. In the system-in package or multichip module **556***g*, each of the interconnects **3** can be connected to one or more of the metal bumps **668**.

[0714] The system-in package or multichip module **556***g* can be connected to and bonded with a carrier, such as mother board, printed circuit board (PCB), ball-grid-array (BGA) substrate, metal substrate, glass substrate, or ceramic substrate, using the metal bumps **668**. For example, referring to FIG. **273**, the system-in package or multichip module **556***g* is bonded with the top side of the carrier **176** illustrated in FIG. **83** using, e.g., a flip chip technology of joining the solder wetting layer **146** of the metal bumps **668** with a solder or gold layer preformed on the top side of the carrier **176**. After joining the solder wetting layer **146** with the solder or gold layer preformed on the top side of the carrier **176**, multiple metal joints **180** are formed between the barrier layer **144** of the metal bumps **668** and the top side of the carrier **176**. The metal joints **180** can be a layer of a Sn—Ag alloy, a Sn—Ag—Cu alloy, a Sn—Au alloy, or a Sn—Pb alloy having a thickness between 5 and 50 micrometers. Next, the under fill **174** illustrated in FIG. **83** is formed between the polymer layer **136** of the system-in package or multichip module **556***g* and

the top side of the carrier **176** and encloses the metal bumps **668** and the metal joints **180**. Next, the solder balls **178** illustrated in FIG. **83** are formed on the bottom side of the carrier **176**.

[0715] Alternatively, the insulating or dielectric layer **122** as shown FIGS. **270**-**273** can be omitted. In this case, the polymer layer **136** is formed on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in the gaps between the metal interconnects **3**, and the contact points of the conduction layer **125***c* of the metal interconnects **3** are exposed by and at ends of the openings **136***a* in the polymer layer **136**. Further, the adhesion/barrier layer **134** is formed on the contact points, exposed by and at the ends of the openings **136***a* in the polymer layer **136**, of the conduction layer **125***c* of the metal interconnects **3**.

[0716] FIG. **274** shows a multichip package **566***g* including a system-in package or multichip module **556***h* connected to the carrier **176** illustrated in FIG. **83** through wirebonded wires **184**, which can be formed by, e.g., the following steps. After forming the structure illustrated in FIG. **269**, the following steps can be subsequently performed as illustrated in FIG. **107** to form an insulating or dielectric layer **122** on the conduction layer **125***c* of the metal interconnects **3**, on the dielectric layer **139**, and in gaps between the metal interconnects **3**, to form multiple metal interconnects or traces **300** on the insulating or dielectric layer **122** and on multiple regions, exposed by multiple openings **122***a* in the layer **122**, of the conduction layer **125***c* of the metal interconnects **3**, and to form a polymer layer **136** on the insulating or dielectric layer **122** and on the metal interconnects or traces **300**. The polymer layer **136** after being cured may have a thickness, e.g., between 1 and 20 micrometers, and preferably between 2 and 15 micrometers or between 5 and 10 micrometers, and multiple openings **136***a* in the polymer layer **136** expose multiple contact points of the metal interconnects or traces **300**. Next, a singulation process can be performed to cut the carrier **11**, the dummy substrates **62**, **165** and **158**, and the layers **22**, **60**, **66**, **88**, **116**, **120**, **122**, **136**, **139** and **140** by using, e.g., mechanical sawing or laser cutting and to singularize multiple system-in packages or multichip modules, such as the system-in package or multichip module **556***h*.

[0717] Next, a plurality of the system-in package or multichip module **556***h* are joined with a carrier **176** by, e.g., forming a glue layer **182** with a thickness, e.g., between 1 and 20 micrometers or between 20 and 150 micrometers on a top side of the carrier **176**, and then attaching the plurality of the system-in package or multichip module **556***h* to the top side of the carrier **11** using the glue layer **182**. The glue layer **182** can be a polymer layer, such as a layer of polyimide, epoxy, benzocyclobutene (BCB), polybenzoxazole (PBO), polyphenylene oxide (PPO), silosane, or SU-8, with a thickness, e.g., between 1 and 20 micrometers or between 20 and 150 micrometers. Next, multiple wires **184**, such as gold wires, copper wires, or aluminum wires, are wirebonded onto the top side of the carrier **176** and onto the contact points, exposed by the openings **136***a* in the polymer layer **136**, of the conduction layer **150** of the metal interconnects or traces **300** by a wirebonding process. Accordingly, the metal interconnects or traces **300** of the plurality of the system-in package or multichip module **556***h* can be physically and electrically connected to the carrier **176** through the wirebonded wires **184**. Next, a molding compound **186** is formed on the plurality of the system-in package or multichip module **556***h*, on the top side of the carrier **176** and on the wirebonded wires **184**, encapsulating the wirebonded wires **184** and the plurality of the system-in package or multichip module **556***h*, by a molding process. The molding compound **186** may include epoxy, carbon filler or glass filler, and the glass filler or carbon filler can be distributed in the epoxy. Next, the solder balls **178** illustrated in FIG. **83** are formed on the bottom side of the carrier **176**. Thereafter, a singulation process is performed to cut the carrier **176** and the molding compound **186** and to singularize a plurality of the multichip package **566***g*. The multichip package **566***g* can be connected to a carrier, such as mother board, ball-grid-array (BGA) substrate, printed circuit board, metal substrate, glass substrate, or ceramic substrate, through the solder balls **178**. The specifications of the carrier **176** shown in FIG. **274** can be referred to as the specifications of the carrier **176** as illustrated in FIG. **83**.

[0718] FIGS. **275**A-**275**L show another process for forming the dielectric layer **60**, the trenches **60***t*, the sidewall dielectric layers **50**, and the through vias **170***v* as shown in FIG. **26**. Referring to FIG. **275**A, after forming the structure illustrated in FIG. **11**, an insulating layer **60***a*, such as a layer of silicon oxide, silicon nitride, silicon oxynitride, silicon carbon nitride, or silicon oxycarbide, having a thickness C**1**, e.g., between 0.1 and 5 micrometers, and preferably between 0.2 and 1.5 micrometers or between 0.15 and 2 micrometers, is formed on the surface **58***s* of the semiconductor substrate **58** of each chip **68**, on the surface(s) **62***s* of the dummy substrate(s) **62**, and on the surface **64***s* of the encapsulation/gap filling material **64**.

[0719] Next, referring to FIG. **275**B, multiple through vias **170***v*, including through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the conductive layer **18** of the carrier **11** and exposing the layers **26** and **34** of the chips **68**, by, e.g., the following steps. First, a photoresist layer is formed on the insulating layer **60***a* by using a suitable process, such as spin coating process or lamination process. Next, a photo exposure process and a development process can be employed to form multiple openings, exposing multiple regions of the insulating layer **60***a*, in the photoresist layer. Next, the insulating layer **60***a* under the openings in the photoresist layer is removed by using a suitable process, such as anisotropic plasma etching process. Next, the dummy substrate(s) **62** under the openings in the photoresist layer and the chips **68** under the openings in the photoresist layer are etched away until predetermined regions of the layers **26** and **34** in the chips **68** and predetermined regions of the conductive layer **18** in the carrier **11** are exposed by the openings in the photoresist layer. Next, the photoresist layer is removed by using, e.g., an organic chemical. Accordingly, the through vias **170***v*, including the vias **170***a*-**170***f*, are formed in the chips **68** and in the dummy substrate(s) **62**, exposing the predetermined regions of the conductive layer **18** of the carrier **11** and exposing the predetermined regions of the layers **26** and **34** of the chips **68**. The specifications of the through vias **170***v* and the supporter **801** shown in FIG. **275**B can be referred to as the specifications of the through vias **170***v* and the supporter **801** as illustrated in FIG. **15**. FIGS. **275**C and **275**D are two examples of schematic top perspective views showing the through via **170***e* and the interconnect or metal trace **35***a* shown in FIG. **275**B.

[0720] As shown in FIGS. **275**B and **275**C, the through via **170***e* can be, but is not limited to, oval-shaped and has a width W**1**, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 microme-

ters, between 1 and 5 micrometers, or between 3 and 10 micrometers. The oval-shaped through via **170***e* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes two regions of the conductive layer **18** in the carrier **11** under the one of the chips **68**. The interconnect or metal trace **35***a* has a line-shaped region, exposed by the oval-shaped through via **170***e*, extending in a horizontal direction from a side of the oval-shaped through via **170***e* to the opposite side of the oval-shaped through via **170***e* through a center of the oval-shaped through via **170***e*. The supporter **801**, between the conductive layer **18** of the carrier **11** and the exposed line-shaped region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be line-shaped, like the exposed line-shaped region of the interconnect or metal trace **35***a*. The interconnect or metal trace **35***a* exposed by the oval-shaped through via **170***e* has a width W**2**, e.g., between 0.3 and 30 micrometers, and preferably between 0.3 and 20 micrometers, between 0.3 and 10 micrometers, between 0.3 and 5 micrometers, or between 0.3 and 1 micrometers. A horizontal distance S**1** between an endpoint of the long axis of the oval-shaped through via **170***e* and an edge, which is closer to the endpoint than the other opposite edge, of the interconnect or metal trace **35***a* exposed by the oval-shaped through via **170***e* can be, e.g., between 1 and 30 micrometers, and preferably between 1 and 20 micrometers, between 1 and 10 micrometers, between 1 and 5 micrometers, or between 3 and 10 micrometers.

[0721] As shown in FIGS. **275**B and **275**D, the through via **170***e* can be, but is not limited to, a circular shape and has a diameter, e.g., between 0.5 and 100 micrometers, between 0.5 and 50 micrometers, between 0.5 and 30 micrometers, between 0.5 and 20 micrometers, between 0.5 and 10 micrometers, or between 0.5 and 5 micrometers, and preferably between 1 and 3 micrometers. The through via **170***e* in one of the chips **68** exposes the interconnect or metal trace **35***a* in the one of the chips **68** and exposes a region of the conductive layer **18** in the carrier **11** under the one of the chips **68**. The interconnect or metal trace **35***a* has a peninsula region, exposed by the through via **170***e*, extending in a horizontal direction from one side of the through via **170***e* at least to a center of the through via **170***e*, but does not reach to the opposite side of the through via **170***e*; the interconnect or metal trace **35***a* has an end exposed by the through via **170***e*. The supporter **801**, between the conductive layer **18** of the carrier **11** and the exposed peninsula region of the interconnect or metal trace **35***a* in the interconnection layer **34**, can be peninsula-shaped, like the exposed peninsula region of the interconnect or metal trace **35***a*.

[0722] Next, referring to FIG. **275**E, the dielectric layer **50** illustrated in FIG. **19** is formed on a top surface of the insulating layer **60***a*, on the conductive layer **18**, exposed by the through vias **170***v* (such as the vias **170***a*, **170***b* and **170***e*), of the carrier **11**, on the layers **26** and **34**, exposed by the through vias **170***v* (such as the vias **170***c*, **170***d*, **170***e* and **170***f*), of the chips **68**, and on sidewalls of the through vias **170***v*.

[0723] Next, referring to FIG. **275**F, the dielectric layer **50** formed on the top surface of the insulating layer **60***a* and on the layers **18**, **26** and **34** is removed by using a suitable process, such as anisotropic plasma etching process. Accordingly, the dielectric layer **50** at bottoms of the through vias **170***v*, on the top surface of the insulating layer **60***a*, and on a top surface of the interconnect or metal trace **35***a* on the supporter **801** is etched away, and the dielectric layer **50** remains on the sidewalls of the through vias **170***v*, so called as sidewall dielectric layers in the through vias **170***v*. The sidewall dielectric layers **50** are formed on the sidewalls of the through vias **170***v* in the chips **68** or in the dummy substrate(s) **62** and are enclosed by the semiconductor substrates **58** of the chips **68** or by the dummy substrate(s) **62**. FIGS. **275**G and **275**H are two examples of schematic top views showing the through via **170***e*, the sidewall dielectric layer **50** on the sidewall of the through via **170***e* and on sidewalls of the supporter **801**, and the interconnect or metal trace **35***a* shown in FIG. **275**F.

[0724] Next, referring to FIG. **275**I, a polymer layer **60***b*, such as a layer of polyimide, benzocyclobutene (BCB), epoxy, polybenzoxazole (PBO), or poly-phenylene oxide (PPO), is formed on the insulating layer **60***a* using a suitable process, such as spin coating process, screen printing process, or lamination process. Next, an exposure process and a development process can be employed to form multiple trenches **60***t*, exposing the insulating layer **60***a*, the through vias **170***v* and the layers **18**, **26** and **34** exposed by the through vias **170***v*, in the polymer layer **60***b*. A 1X stepper or 1X contact aligner can be used to expose the polymer layer **60***b* during the exposure process. Next, the polymer layer **60***b* is cured or heated at a temperature between 150 degrees centigrade and 400 degrees centigrade, and preferably between 180 degrees centigrade and 250 degrees centigrade. The polymer layer **60***b* after being cured or heated has a thickness C**2**, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers. FIG. **275**J is a schematic top perspective view showing the trenches **60***t*, the sidewall dielectric layers **50** and the through vias **170***v* (including the vias **170***a*-**170***f*) shown in FIG. **275**I according an embodiment of the present invention, and FIG. **275**I is a cross-sectional view cut along the line D-D shown in FIG. **275**J.

[0725] Accordingly, using the above-mentioned steps, the above-mentioned dielectric layer **60** also can be provided with the insulating layer **60***a* and the polymer layer **60***b* on the insulating layer **60***a*. The trenches **60***t* in the polymer layer **60***b* are used to provide spaces having inter-chip interconnects and intra-chip interconnects formed therein. The through vias **170***v* are formed under the trenches **60***t*.

[0726] Next, referring to FIG. **275**K, an adhesion/barrier layer **52** having a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, is formed on the layers **18**, **26** and **34** exposed by the through vias **170***v*, on the sidewalls of the through vias **170***v*, on a top surface of the polymer layer **60***b*, on sidewalls of the trenches **60***t* in the polymer layer **60***b*, on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The adhesion/barrier layer **52** can be formed by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a seed layer **54** having a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, is formed on the adhesion/barrier layer **52** by a physical vapor deposition (PVD) process, such as sputtering process or evaporation process, by a chemical-vapor deposition (CVD) process, or by other thin-film deposition processes, such as atomic layer deposition (ALD). Next, a con-

IPR2026-00067
TSMC EX1019 Page 344

duction layer **56** is formed on the seed layer **54** using a suitable process, such as electroplating process.

[0727] The adhesion/barrier layer **52** may include or can be a layer of titanium, a titanium-tungsten alloy, titanium nitride, chromium, tantalum, tantalum nitride, nickel, or nickel vanadium having a thickness, e.g., smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers. The seed layer **54** may include or can be a layer of copper, a titanium-copper alloy, nickel, gold, or silver having a thickness, e.g., smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the adhesion/barrier layer **52**. The conduction layer **56** may include or can be an electroplated metal layer of copper, gold, or silver on the seed layer **54**.

[0728] Next, referring to FIG. **275**L, the layers **52**, **54** and **56** are ground or polished by using a suitable process, such as chemical-mechanical-polishing (CMP) process, mechanical polishing process, mechanical grinding process, or a process including mechanical polishing and chemical etching, until the polymer layer **60***b* of the dielectric layer **60** has an exposed top surface **60***s*, over which there are no portions of the layers **52**, **54** and **56**, and the layers **52**, **54** and **56** outside the trenches **60***t* are removed.

[0729] Accordingly, the exposed top surface **60***s* of the polymer layer **60***b* can be substantially coplanar with the ground or polished surface **56***s* of the conduction layer **56** in the trenches **60***t*, and the surfaces **56***s* and **60***s* can be substantially flat. The adhesion/barrier layer **52** and the seed layer **54** are at sidewalls and a bottom of the conduction layer **56** in the trenches **60***t*, and the sidewalls and the bottom of the conduction layer **56** in the trenches **60***t* are covered by the adhesion/barrier layer **52** and the seed layer **54**. After the layers **52**, **54** and **56** are ground or polished, the polymer layer **60***b* of the dielectric layer **60** has a thickness, between the exposed top surface **60***s* of the polymer layer **60***b* and the top surface of the insulating layer **60***a*, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0730] In a first alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a titanium-containing layer, such as a single layer of titanium, titanium-tungsten alloy, or titanium nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls of the trenches **60***t* in the polymer layer **60***b*, on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*, on the sidewalls of the through vias **170***v*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the titanium-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0731] In a second alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a tantalum-containing layer, such as a single layer of tantalum or tantalum nitride, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls of the trenches **60***t* in the polymer layer **60***b*, on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*, on the sidewalls of the through vias **170***v*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the tantalum-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0732] In a third alternative, after the layers **52**, **54** and **56** are ground or polished, the adhesion/barrier layer **52** can be a chromium-containing layer, such as a single layer of chromium, with a thickness smaller than 1 micrometer, such as between 1 nanometer and 0.5 micrometers, and preferably between 0.1 and 0.2 micrometers, on the sidewalls of the trenches **60***t* in the polymer layer **60***b*, on the top surface of the insulating layer **60***a* at the bottoms of the trenches **60***t*, on the sidewalls of the through vias **170***v*, on the layers **18**, **26** and **34** at the bottoms of the through vias **170***v*, and on the interconnect or metal trace **35***a* that is on the supporter **801**. The seed layer **54** can be a single layer of copper or a titanium-copper alloy with a thickness smaller than 1 micrometer, such as between 10 nanometers and 0.8 micrometers, and preferably between 80 nanometers and 0.15 micrometers, on the chromium-containing layer, in the trenches **60***t*, and in the through vias **170***v*. The conduction layer **56** can be an electroplated copper layer on the single layer of copper or a titanium-copper alloy, in the trenches **60***t*, and in the through vias **170***v*. The electroplated copper layer in the trenches **60***t* has a thickness, e.g., between 1 and 50 micrometers, and preferably between 2 and 30 micrometers or between 5 and 25 micrometers.

[0733] After the layers **52**, **54** and **56** are ground or polished, the layers **52**, **54** and **56** in the trenches **60***t* compose multiple metal interconnects (or damascene metal traces) **1**, including metal interconnects (or damascene metal traces) **1***a* and **1***b*, in the trenches **60***t*. The layers **52**, **54** and **56** in the through vias **170***v* compose multiple metal plugs (or metal vias) **5***p* in the through vias **170***v*, including metal plugs (or metal vias) **5***a*, **5***b*, **5***c*, **5***d*, **5***e* and **5***f* in the through vias **170***a*, **170***b*, **170***c*, **170***d*, **170***e* and **170***f*, respectively. Each of the metal plugs **5***p* in the chips **68** and in the dummy substrate(s) **62** is enclosed by one of the sidewall dielectric layers **50** in the through vias **170***v*. The metal plug **5***a* is formed in the dummy substrate **62**, and the metal plugs **5***b*, **5***c*, **5***d*, **5***e* and **5***f* are formed in the same chip **68**. The supporter **801** and the interconnect or metal trace **35***a*, in the interconnection layer **34**, on the supporter **801** can be between two portions, lower than a horizontal level, at which a top surface of the interconnection layer **34** is positioned, of the metal plug **5***e*. These metal plugs **5***p* formed in the chips **68** and in the dummy substrate(s) **62** can connect the metal interconnects **1** and the semiconductor

devices **36** in the chips **68** and connect the metal interconnects **1** and multiple contact points of the conductive layer **18** in the carrier **11**. The metal interconnects **1**, such as **1***a* and **1***b*, in the trenches **60***t* may have a thickness, e.g., between 0.1 and 5 micrometers, and preferably between 1 and 3 micrometers. For more detailed description about the metal plugs **5***p* (including the metal plugs **5***a*-**5***f*) and the metal interconnects **1** (including the metal interconnects **1***a* and **1***b*) shown in FIG. **275**L, please refer to the illustration in FIG. **26**.

[0734] Alternatively, the element **68** not only can indicate a chip, but also can indicate a wafer. When the element **68** is a wafer, the carrier **11** can be another wafer. Thereby, the process illustrated in the invention can be employed to the wafer-to-wafer bonding.

[0735] After forming the structure illustrated in FIG. **275**L, the steps illustrated in FIGS. **27**-**88** can be performed to form the system-in package or multichip module **555**, **555***b*, or **555***c*.

[0736] In FIG. **82**, **83**, **84**, **85**, **87**, **88**, **103**, **104**, **105**, **106**, **108**, **109**, **128**, **129**, **130**, **131**, **132**, **136**, **137**, **138**, **139**, **181**, **140**, **182**, **183**, **184**, **185**, **207**, **208**, **209**, **250**, **210**, **211**, **251**, **252**, **253**, **254**, **270**, **271**, **272**, **273**, or **274**, any one of the chips **68** may have a different circuit design from that of any one of the chips **72** and **118** and may have a different area (top surface) or size from that of any one of the chips **72** and **118**, and any one of the chips **72** may have a different circuit design from that of any one of the chips **118** and may have a different area (top surface) or size from that of any one of the chips **118**. Alternatively, the chip **72** including the metal plug **6***d* may have a different circuit design or a different area (top surface) or size from that of the chip **118** including the metal plug **7***e* and may have a same circuit design or a same area (top surface) or size as that of the chip **118** including the metal plug **7***d*, and the chip **72** including the metal plug **6***c* may have a same circuit design or a same area (top surface) or size as that of the chip **72** including the metal plug **6***d* or may have a different circuit design or a different area (top surface) or size from that of the chip **72** including the metal plug **6***d*.

[0737] Regarding to the previously described system-in package or multichip module **555**, **555***b*, **555***c*, **555***e*, **555***g*, **555***h*, **555***j*, **555***m*, **555***n*, **555***o*, **555***q*, **555***r*, **555***s*, **555***u*, **555***v*, **555***w*, **555***y*, **555***z*, **556***a*, **556***c*, **556***d*, **556***e*, **556***g*, or **556***h*, no matter where the chips **68**, **72** and **118** are provided, each of the chips **68**, **72** and **118** can be a central-processing-unit (CPU) chip designed by x86 architecture, a central-processing-unit (CPU) chip designed by non x86 architectures, such as ARM, Strong ARM or MIPs, a graphics-processing-unit (GPU) chip, a digital-signal-processing (DSP) chip, a baseband chip, a wireless local area network (WLAN) chip, a memory chip, such as flash memory chip, dynamic-random-access-memory (DRAM) chip or static-random-access-memory (SRAM) chip, a logic chip, an analog chip, a power device, a regulator, a power management device, a global-positioning-system (GPS) chip, a "Bluetooth" chip, a system-on chip (SOC) including a graphics-processing-unit (GPU) circuit block, a wireless local area network (WLAN) circuit block and a central-processing-unit (CPU) circuit block designed by x86 architecture or by non x86 architectures, a system-on chip (SOC) including a baseband circuit block, a wireless local area network (WLAN) circuit block and a central-processing-unit (CPU) circuit block designed by x86 architecture or by non x86 architectures, a system-on chip (SOC) including a baseband circuit block, a graphics-processing-unit (GPU) circuit block and a central-processing-unit (CPU) circuit block designed by x86 architecture or by non x86 architectures, or a system-on chip (SOC) including a central-processing-unit (CPU) circuit block, a graphics-processing-unit (GPU) circuit block, and a memory circuit block (such as flash memory circuit block, dynamic-random-access-memory (DRAM) circuit block, or static-random-access-memory (SRAM) circuit block). Alternatively, each of the chips **68**, **72** and **118** can be a chip including one or more of a central-processing-unit (CPU) circuit block, a graphics-processing-unit (GPU) circuit block, a digital-signal-processing (DSP) circuit block, a memory circuit block (such as dynamic-random-access-memory (DRAM) circuit block, static-random-access-memory (SRAM) circuit block, or flash memory circuit block), a baseband circuit block, a Bluetooth circuit block, a global-positioning-system (GPS) circuit block, a wireless local area network (WLAN) circuit block, and a modem circuit block.

[0738] Regarding to the previously described system-in package or multichip module **555**, **555***b*, **555***c*, **555***e*, **555***g*, **555***h*, **555***j*, **555***m*, **555***n*, **555***o*, **555***q*, **555***r*, **555***s*, **555***u*, **555***v*, **555***w*, **555***y*, **555***z*, **556***a*, **556***c*, **556***d*, **556***e*, **556***g*, or **556***h*, each of the chips **68**, **72** and **118** may include loading input/output (I/O) circuits serving for chip probing testing (CP testing), for built-in-self testing, or for external signal transmission through the solder bumps or balls **126**, through the metal bumps **668**, or through the wirebonded wires **184**. Each of the loading input/output (I/O) circuits may have a total loading (total capacitance) greater than 10 pF (pico farad), such as between 15 pF and 50 pF. Each of the chips **68**, **72** and **118** may further include small loading input/output (I/O) circuits each having a total loading (total capacitance) between 0.1 pF and 10 pF, and preferably between 0.1 pF and 2 pF.

[0739] For example, each of the chips **68** may include some of the small loading input/output (I/O) circuits serving for intra-chip signal connection, having a data bit width between 32 and 2,048, between 128 and 2,048, between 256 and 1,024, between 512 and 1,024, or equal to or more than 128, to be connected to another one of the chips **68** through the metal plugs **5***p* and through the metal interconnects **1**, may include some of the small loading input/output (I/O) circuits serving for inter-chip signal connection, having a data bit width between 32 and 2,048, between 128 and 2,048, between 256 and 1,024, between 512 and 1,024, or equal to or more than 128, to be connected to one or more of the chips **72** through the metal plugs **5***p* and **6***p* and through the metal interconnects **1** and **2**, and may include some of the small loading input/output (I/O) circuits serving for inter-chip signal connection, having a data bit width between 32 and 2,048, between 128 and 2,048, between 256 and 1,024, between 512 and 1,024, or equal to or more than 128, to be connected to one of the chips **118** through the metal plugs **5***p*, **6***p* and **7***p* and through the metal interconnects **1**, **2** and **3**. Each of the chips **72** may include some of the small loading input/output (I/O) circuits serving for intra-chip signal connection, having a data bit width between 32 and 2,048, between 128 and 2,048, between 256 and 1,024, between 512 and 1,024, or equal to or more than 128, to be connected to another one of the chips **72** through the metal plugs **6***p* and through the metal interconnects **2**, and may include some of the small loading input/output (I/O) circuits serving for inter-chip signal connection, having a data bit width between 32 and 2,048, between 128 and 2,048, between 256 and 1,024, between 512 and 1,024, or equal to or more than 128, to be connected to one of the chips

118 through the metal plugs **6***p* and **7***p* and through the metal interconnects **2** and **3**. Each of the chips **118** may include some of the small loading input/output (I/O) circuits serving for intra-chip signal connection, having a data bit width between 32 and 2,048, between 128 and 2,048, between 256 and 1,024, between 512 and 1,024, or equal to or more than 128, to be connected to another one of the chips **118** through the metal plugs **7***p* and through the metal interconnects **3**.

[0740] Regarding to the previously described system-in package or multichip module **555**, **555***b*, **555***c*, **555***e*, **555***g*, **555***h*, **555***j*, **555***m*, **555***n*, **555***o*, **555***q*, **555***r*, **555***s*, **555***u*, **555***v*, **555***w*, **555***y*, **555***z*, **556***a*, **556***c*, **556***d*, **556***e*, **556***g*, or **556***h*, the chips **68** can be connected to multiple metal interconnects of the conductive layer **18** of the carrier **11** through the metal interconnects **1** (such as the metal interconnects **1***a* and **1***b*) and through the metal plugs **5***p*, can be connected to the chips **72** through the metal plugs **5***p* and **6***p*, through the metal interconnects **1** (such as the metal interconnects **1***a* and **1***b*), and through the metal interconnects **2** (such as the metal interconnects **2***a* and **2***b*), and can be connected to the chips **118** through the metal plugs **5***p*, **6***p* and **7***p*, through the metal interconnects **1** (such as the metal interconnects **1***a* and **1***b*), through the metal interconnects **2** (such as the metal interconnects **2***a* and **2***b*), and through the metal interconnects **3** (such as the metal interconnects **3***a* and **3***c*). The chips **72** can be connected to the metal interconnects of the conductive layer **18** of the carrier **11** through the metal interconnects **2** (such as the metal interconnects **2***a* and **2***b*), through the metal interconnects **1** (such as the metal interconnects **1***a* and **1***b*), and through the metal plugs **5***p* and **6***p*, and can be connected to the chips **118** through the metal plugs **6***p* and **7***p*, through the metal interconnects **2** (such as the metal interconnects **2***a* and **2***b*), and through the metal interconnects **3** (such as the metal interconnects **3***a* and **3***c*). The chips **118** can be connected to the metal interconnects of the conductive layer **18** of the carrier **11** through the metal interconnects **3** (such as the metal interconnects **3***a* and **3***c*), through the metal interconnects **2** (such as the metal interconnects **2***a* and **2***b*), through the metal interconnects **1** (such as the metal interconnects **1***a* and **1***b*), and through the metal plugs **5***p*, **6***p* and **7***p*.

[0741] FIG. **276** is an example of a circuit diagram showing interface circuits between two chips. The circuits **700** and **800** can be provided in any two of the previously described chips **68**, **72** and **118** of the previously described system-in package or multichip module illustrated in FIG. **82**, **83**, **84**, **85**, **87**, **88**, **103**, **104**, **105**, **106**, **108**, **109**, **128**, **129**, **130**, **131**, **132**, **136**, **137**, **138**, **139**, **181**, **140**, **182**, **183**, **184**, **185**, **207**, **208**, **209**, **250**, **210**, **211**, **251**, **252**, **253**, **254**, **270**, **271**, **272**, **273**, or **274**. The circuits **700** include contact points P**1** and P**2** connected to contact points P**3** and P**4** of the circuits **800** through metal interconnects **350** that are not connected to any external circuit of the system-in package or multichip module, such as the previously described carrier **176**. The circuits **700** further include contact points P**5** and P**6** serving for chip probing testing (CP testing), for built-in-self testing, or for external signal connection. The circuits **800** further include contact points P**7** and P**8** serving for chip probing testing (CP testing), for built-in-self testing, or for external signal connection. Alternatively, the contact points P**5** and P**6** of the circuits **700** and the contact points P**7** and P**8** of the circuits **800** can be connected to an external circuit of the system-in package or multichip module, such as mother board, metal substrate, glass substrate, ceramic substrate or the previously described carrier **176**, through the previously described solder bumps or balls **126**, through the previously described metal bumps **672**, or through the previously described wirebonded wires **184**.

[0742] In a first alternative, the circuits **700** can be provided in one of the chips **68**, and the circuits **800** can be provided in another one of the chips **68**. In this case, the two contact points P**1** and P**2** of the circuits **700** are two contact points, at bottoms of two of the through vias **170***v* in the one of the chips **68**, of the layers **26** and/or **34** of the one of the chips **68**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module, and the two contact points P**3** and P**4** of the circuits **800** are two contact points, at bottoms of two of the through vias **170***v* in the another one of the chips **68**, of the layers **26** and/or **34** of the another one of the chips **68**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module. The contact point P**5** of the circuits **700**, for example, can be a contact point, at the bottom of the previously described through via **170***c* or **170***d*, of the interconnect or metal trace **35***d* or **35***c*, connecting to the previously described metal plug **5***c* or **5***d*, and the contact point P**6** of the circuits **700** can be a contact point, at the bottom of the previously described through via **170***f*, of the interconnect or metal trace **35***b*, connecting to the previously described metal plug **5***f*. Alternatively, the contact point P**5** of the circuits **700** can be a contact point, at the bottom of the previously described through via **170***c* or **170***d*, of the interconnect or metal trace **35***d* or **35***c*, connecting to the previously described metal plug **5***c* or **5***d*, and the contact point P**6** of the circuits **700** can be a contact point of the interconnect or metal trace **35***a* on the previously described supporter **801**, connecting to the previously described metal plug **5***e*. Alternatively, the contact point P**5** of the circuits **700** can be a contact point of the interconnect or metal trace **35***a* on the previously described supporter **801**, connecting to the previously described metal plug **5***e*, and the contact point P**6** of the circuits **700** can be a contact point, at the bottom of the previously described through via **170***c* or **170***d*, of the interconnect or metal trace **35***d* or **35***c*, connecting to the previously described metal plug **5***c* or **5***d*. The metal interconnect **350** connecting the contact point P**1** of the circuits **700** and the contact point P**3** of the circuits **800** includes one of the metal plugs **5***p* in the one of the chips **68**, one of the metal plugs **5***p* in the another one of the chips **68**, and one of the metal interconnects **1**. The metal interconnect **350** connecting the contact point P**2** of the circuits **700** and the contact point P**4** of the circuits **800** includes another one of the metal plugs **5***p* in the one of the chips **68**, another one of the metal plugs **5***p* in the another one of the chips **68**, and another one of the metal interconnects **1**.

[0743] In a second alternative, the circuits **700** can be provided in one of the chips **68**, and the circuits **800** can be provided in one of the chips **72**. In this case, the two contact points P**1** and P**2** of the circuits **700** can be supposed to be two contact points, at bottoms of two of the through vias **170***v* in the one of the chips **68**, of the layers **26** and/or **34** of the one of the chips **68**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module, and the two contact points P**3** and P**4** of the circuits **800** can be supposed to be two contact points, at bottoms of two of the through vias **164***v* in the one of the chips **72**, of the layers **106** and/or **114** of the one of the chips **72**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module. In this case, the metal interconnect **350** connecting the contact point

IPR2026-00067
TSMC EX1019 Page 347

P1 or P2 of the circuits **700** and the contact point P3 or P4 of the circuits **800** may be a direct path, as indicated by circles with cross lines shown in the following FIG. **297**, connecting the contact point P3 or P4 directly downward to the contact point P1 or P2 not through any one of the metal interconnects **2**, or an indirect path, connecting the contact point P3 or P4 to the contact point P1 or P2 through one of the metal interconnects **2**. The direct path may include an interconnect like the metal plug **6***e* passing completely through the chip **72** having the circuits **800**, connecting the contact point P3 or P4 over the supporter **802** to one of the metal interconnects **1** connected to the contact point P1 or P2 through one of the metal plugs **5***p*, like the metal plug **5***c*, **5***d* or **5***f*, passing blindly through the chip **68** having the circuits **700**. The indirect path may include one of the interconnects **2** connected to the contact point P3 or P4 through one of the metal plugs **6***p*, like the metal plug **6***c* or **6***d*, passing blindly through the chip **72** having the circuits **800**, and one of the interconnects **1** connected to the one of the interconnects **2** through one of the metal plugs **6***p*, like the metal plug **6***a* passing completely through the dummy substrate **165** or like the metal plug **6***b* passing completely through the chip **72** either having the circuits **800** or not having the circuits **800**, and connected to the contact point P1 or P2 through one of the metal plugs **5***p*, like the metal plug **5***c*, **5***d* or **5***f*, passing blindly through the chip **68** having the circuits **700**.

[0744] Besides, in this case, the contact point P5 or P6 of the circuits **700** provided in the one of the chips **68** can be supposed to be a contact point, at the bottom of the previously described through via **170***c*, **170***d* or **170***f*, of the interconnect or metal trace **35***d*, **35***c* or **35***b*, connected to an external circuit of the system-in package or multichip module through one of the metal plugs **5***p*, like the metal plug **5***c*, **5***d* or **5***f*, passing blindly through the chip **68** having the circuits **700**, through one of the metal interconnects **1**, through one of the metal plugs **6***p*, like the metal plug **6***a* passing completely through the dummy substrate **165** or like the metal plug **6***b* passing completely through one of the chips **72**, through one of the metal interconnects **2**, through one of the metal plugs **7***p*, like the metal plug **7***a* passing completely through the dummy substrate **158** or like the metal plug **7***b* passing completely through one of the chips **118**, through one of the interconnects **3** and through one of the solder bumps or balls **126**, the metal bumps **668** or the wirebonded wires **184**. The contact point P7 or P8 of the circuits **800** provided in the one of the chips **72** can be supposed to be a contact point, at the bottom of the previously described through via **164***c* or **164***d*, of the interconnect or metal trace **55***c* or **55***b*, connected to an external circuit of the system-in package or multichip module through one of the metal plugs **6***p*, like the metal plug **6***c* or **6***d*, passing blindly through the chip **72** having the circuits **800**, through one of the metal interconnects **2**, through one of the metal plugs **7***p*, like the metal plug **7***a* passing completely through the dummy substrate **158** or like the metal plug **7***b* passing completely through one of the chips **118**, through one of the interconnects **3** and through one of the solder bumps or balls **126**, the metal bumps **668** or the wirebonded wires **184**.

[0745] In a third alternative, the circuits **700** can be provided in one of the chips **68**, and the circuits **800** can be provided in one of the chips **118**. In this case, the two contact points P1 and P2 of the circuits **700** are two contact points, at bottoms of two of the through vias **170***v* in the one of the chips **68**, of the layers **26** and/or **34** of the one of the chips **68**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module, and the two contact points P3 and P4 of the circuits **800** are two contact points, at bottoms of two of the through vias **156***v* in the one of the chips **118**, of the layers **17** and/or **19** of the one of the chips **118**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module. The contact point P5 of the circuits **700** can be a contact point, at the bottom of the previously described through via **170***c* or **170***d*, of the interconnect or metal trace **35***d* or **35***c*, connecting to the previously described metal plug **5***c* or **5***d*, and the contact point P7 of the circuits **800** can be a contact point of the interconnect or metal trace **75***a* on the previously described supporter **803**, connecting to the previously described metal plug **7***e*. Alternatively, the contact point P6 of the circuits **700** can be a contact point of the interconnect or metal trace **35***a* on the previously described supporter **801**, connecting to the previously described metal plug **5***e*, and the contact point P8 of the circuits **800** can be a contact point, at the bottom of the previously described through via **156***c*, **156***d* or **156***f*, of the interconnect or metal trace **75***d*, **75***c* or **75***b*, connecting to the previously described metal plug **7***c*, **7***d* or **7***f*. The metal interconnect **350** connecting the contact point P1 of the circuits **700** and the contact point P3 of the circuits **800** includes one of the metal plugs **6***p* passing through one of the chips **72** or the dummy substrate **165** and further includes one of the metal plugs **7***p* passing through the one of the chips **118**, the dummy substrate **158** or another one of the chips **118**. The metal interconnect **350** connecting the contact point P2 of the circuits **700** and the contact point P4 of the circuits **800** includes another one of the metal plugs **6***p* passing through one of the chips **72** or the dummy substrate **165** and further includes another one of the metal plugs **7***p* passing through the one of the chips **118**, the dummy substrate **158** or another one of the chips **118**.

[0746] In a fourth alternative, the circuits **700** can be provided in one of the chips **72**, and the circuits **800** can be provided in another one of the chips **72**. In this case, the two contact points P1 and P2 of the circuits **700** are two contact points, at bottoms of two of the through vias **164***v* in the one of the chips **72**, of the layers **106** and/or **114** of the one of the chips **72**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module, and the two contact points P3 and P4 of the circuits **800** are two contact points, at bottoms of two of the through vias **164***v* in the another one of the chips **72**, of the layers **106** and/or **114** of the another one of the chips **72**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module. The contact point P5 of the circuits **700** can be a contact point of the interconnect or metal trace **55***a* on the previously described supporter **802**, connecting to the previously described metal plug **6***e*, and the contact point P7 of the circuits **800** can be a contact point, at the bottom of the previously described through via **164***c*, of the interconnect or metal trace **55***c*, connecting to the previously described metal plug **6***c*. Alternatively, the contact point P6 of the circuits **700** can be a contact point of the interconnect or metal trace **55***a* on the previously described supporter **802**, connecting to the previously described metal plug **6***e*, and the contact point P8 of the circuits **800** can be a contact point, at the bottom of the previously described through via **164***c*, of the interconnect or metal trace **55***c*, connecting to the previously described metal plug **6***c*. The metal interconnect **350** connecting the contact point P1 of the circuits **700** and the

contact point P3 of the circuits **800** includes one of the metal plugs **6***p* in the one of the chips **72**, one of the metal plugs **6***p* in the another one of the chips **72**, and one of the metal interconnects **2**. The metal interconnect **350** connecting the contact point P2 of the circuits **700** and the contact point P4 of the circuits **800** includes another one of the metal plugs **6***p* in the one of the chips **72**, another one of the metal plugs **6***p* in the another one of the chips **72**, and another one of the metal interconnects **2**.

[0747] In a fifth alternative, the circuits **700** can be provided in one of the chips **72**, and the circuits **800** can be provided in one of the chips **118**. In this case, the two contact points P1 and P2 of the circuits **700** are two contact points, at bottoms of two of the through vias **164***v* in the one of the chips **72**, of the layers **106** and/or **114** of the one of the chips **72**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module, and the two contact points P3 and P4 of the circuits **800** are two contact points, at bottoms of two of the through vias **156***v* in the one of the chips **118**, of the layers **17** and/or **19** of the one of the chips **118**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module. The contact point P5 of the circuits **700** can be a contact point of the interconnect or metal trace **55***a* on the previously described supporter **802**, connecting to the previously described metal plug **6***e*, and the contact point P7 of the circuits **800** can be a contact point, at the bottom of the through via **156***c*, **156***d* or **156***f*, of the interconnect or metal trace **75***d*, **75***c* or **75***b*, connecting to the previously described metal plug **7***c*, **7***d* or **7***f*. Alternatively, the contact point P6 of the circuits **700** can be a contact point, at the bottom of the through via **164***c* or **164***d*, of the interconnect or metal trace **55***c* or **55***b*, connecting to the previously described metal plug **6***c* or **6***d*, and the contact point P8 of the circuits **800** can be a contact point of the interconnect or metal trace **75***a* on the previously described supporter **803**, connecting to the previously described metal plug **7***e*. The metal interconnect **350** connecting the contact point P1 of the circuits **700** and the contact point P3 of the circuits **800** includes one of the metal plugs **7***p* passing through the one of the chips **118**, the dummy substrate **158**, or another one of the chips **118**. The metal interconnect **350** connecting the contact point P2 of the circuits **700** and the contact point P4 of the circuits **800** includes another one of the metal plugs **7***p* passing through the one of the chips **118**, the dummy substrate **158**, or another one of the chips **118**.

[0748] In a sixth alternative, the circuits **700** can be provided in one of the chips **118**, and the circuits **800** can be provided in another one of the chips **118**. In this case, the two contact points P1 and P2 of the circuits **700** are two contact points, at bottoms of two of the through vias **156***v* in the one of the chips **118**, of the layers **17** and/or **19** of the one of the chips **118**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module, and the two contact points P3 and P4 of the circuits **800** are two contact points, at bottoms of two of the through vias **156***v* in the another one of the chips **118**, of the layers **17** and/or **19** of the another one of the chips **118**, in which the two contact points are not connected to any external circuit of the system-in package or multichip module. The contact point P5 of the circuits **700** can be a contact point, at the bottom of the previously described through via **156***c*, of the interconnect or metal trace **75***d*, connecting to the previously described metal plug **7***c*, and the contact point P7 of the circuits **800** can be a contact point of the interconnect or metal trace **75***a* on the previously described supporter **803**, connecting to the previously described metal plug **7***e*. Alternatively, the contact point P6 of the circuits **700** can be a contact point, at the bottom of the previously described through via **156***c*, of the interconnect or metal trace **75***d*, connecting to the previously described metal plug **7***c*, and the contact point P8 of the circuits **800** can be a contact point, at the bottom of the previously described through via **156***f*, of the interconnect or metal trace **75***b*, connecting to the previously described metal plug **7***f*. The metal interconnect **350** connecting the contact point P1 of the circuits **700** and the contact point P3 of the circuits **800** includes one of the metal plugs **7***p* in the one of the chips **118**, one of the metal plugs **7***p* in the another one of the chips **118**, and one of the metal interconnects **3**. The metal interconnect **350** connecting the contact point P2 of the circuits **700** and the contact point P4 of the circuits **800** includes another one of the metal plugs **7***p* in the one of the chips **118**, another one of the metal plugs **7***p* in the another one of the chips **118**, and another one of the metal interconnects **3**.

[0749] Referring to FIG. **276**, the circuits **700** may include two inter-chip circuits **200***a* and **200***b*, two internal circuits **200***c* and **200***d*, two off-chip circuits **57***a* and **57***b*, and two testing interface circuits **333***a* and **333***b*. The circuits **800** may include two inter-chip circuits **200***e* and **200***f*, two internal circuits **200***g* and **200***h*, two off-chip circuits **57***c* and **57***d*, and two testing interface circuits **333***c* and **333***d*.

[0750] The inter-chip circuit **200***a* of the circuits **700** may include an inter-chip buffer **701***a* and an inter-chip ESD (electro static discharge) circuit **701***b*. The inter-chip buffer **701***a* has a first node FN1 and a second node SN1, and the inter-chip ESD circuit **701***b* has a node En connected to the first node FN1. The inter-chip buffer **701***a* can be an inter-chip receiver which can be an inverter composed of an NMOS transistor **751***a* and a PMOS transistor **751***b*. The gates of the NMOS transistor **751***a* and the PMOS transistor **751***b* serve as an input node that is the first node FN1 of the inter-chip buffer **701***a*. The drains of the NMOS transistor **751***a* and the PMOS transistor **751***b* serve as an output node that is the second node SN1 of the inter-chip buffer **701***a*.

[0751] Alternatively, the inter-chip buffer **701***a* can be a multi-stage cascade inter-chip receiver including several stages of inverters. For example, referring to FIG. **277**, the inter-chip buffer **701***a* can be a two-stage cascade inter-chip receiver. The first stage **584***a* of the two-stage cascade inter-chip receiver is an inverter composed of the NMOS transistor **751***a* and the PMOS transistor **751***b*, and the second stage **584***b* (the last stage) of the two-stage cascade inter-chip receiver is an inverter composed of an NMOS transistor **751***c* and a PMOS transistor **751***d*. The size of the NMOS transistor **751***c* is larger than that of the NMOS transistor **751***a*, and the size of the PMOS transistor **751***d* is larger than that of the PMOS transistor **751***b*. The gates of the NMOS transistor **751***a* and the PMOS transistor **751***b* serve as an input node that is the first node FN1 of the inter-chip buffer **701***a*. The drains of the NMOS transistor **751***c* and the PMOS transistor **751***d* serve as an output node that is the second node SN1 of the inter-chip buffer **701***a*. The drains of the NMOS transistor **751***a* and the PMOS transistor **751***b* are connected to the gates of the NMOS transistor **751***c* and the PMOS transistor **751***d*.

[0752] Referring to FIG. **276**, the inter-chip circuit **200***b* of the circuits **700** may include an inter-chip buffer **702***a* and an inter-chip ESD (electro static discharge) circuit **702***b*. The inter-chip buffer **702***a* has a first node FN2 and a second node

SN2, and the inter-chip ESD circuit **702***b* has a node En connected to the second node SN2. The inter-chip buffer **702***a* can be an inter-chip driver which can be an inverter composed of an NMOS transistor **752***a* and a PMOS transistor **752***b*. The gates of the NMOS transistor **752***a* and the PMOS transistor **752***b* serve as an input node that is the first node FN2 of the inter-chip buffer **702***a*. The drains of the NMOS transistor **752***a* and the PMOS transistor **752***b* serve as an output node that is the second node SN2 of the inter-chip buffer **702***a*.

[0753] Alternatively, the inter-chip buffer **702***a* can be a multi-stage cascade inter-chip driver including several stages of inverters. For example, referring to FIG. **278**, the inter-chip buffer **702***a* can be a two-stage cascade inter-chip driver. The first stage **585***a* of the two-stage cascade inter-chip driver is an inverter composed of an NMOS transistor **752***c* and a PMOS transistor **752***d*, and the second stage **585***b* (the last stage) of the two-stage cascade inter-chip driver is an inverter composed of the NMOS transistor **752***a* and the PMOS transistor **752***b*. The size of the NMOS transistor **752***a* is larger than that of the NMOS transistor **752***c*, and the size of the PMOS transistor **752***b* is larger than that of the PMOS transistor **752***d*. The gates of the NMOS transistor **752***c* and the PMOS transistor **752***d* serve as an input node that is the first node FN2 of the inter-chip buffer **702***a*. The drains of the NMOS transistor **752***a* and the PMOS transistor **752***b* serve as an output node that is the second node SN2 of the inter-chip buffer **702***a*. The drains of the NMOS transistor **752***c* and the PMOS transistor **752***d* are connected to the gates of the NMOS transistor **752***a* and the PMOS transistor **752***b*.

[0754] Referring to FIG. **276**, the inter-chip circuit **200***e* of the circuits **800** may include an inter-chip buffer **703***a* and an inter-chip ESD (electro static discharge) circuit **703***b*. The inter-chip buffer **703***a* has a first node FN3 and a second node SN3, and the inter-chip ESD circuit **703***b* has a node En connected to the second node SN3. The inter-chip buffer **703***a* can be an inter-chip driver which can be an inverter composed of an NMOS transistor **753***a* and a PMOS transistor **753***b*. The gates of the NMOS transistor **753***a* and the PMOS transistor **753***b* serve as an input node that is the first node FN3 of the inter-chip buffer **703***a*. The drains of the NMOS transistor **753***a* and the PMOS transistor **753***b* serve as an output node that is the second node SN3 of the inter-chip buffer **703***a*.

[0755] Alternatively, the inter-chip buffer **703***a* can be a multi-stage cascade inter-chip driver including several stages of inverters. For example, referring to FIG. **279**, the inter-chip buffer **703***a* can be a two-stage cascade inter-chip driver. The first stage **586***a* of the two-stage cascade inter-chip driver is an inverter composed of an NMOS transistor **753***c* and a PMOS transistor **753***d*, and the second stage **586***b* (the last stage) of the two-stage cascade inter-chip driver is an inverter composed of the NMOS transistor **753***a* and the PMOS transistor **753***b*. The size of the NMOS transistor **753***a* is larger than that of the NMOS transistor **753***c*, and the size of the PMOS transistor **753***b* is larger than that of the PMOS transistor **753***d*. The gates of the NMOS transistor **753***c* and the PMOS transistor **753***d* serve as an input node that is the first node FN3 of the inter-chip buffer **703***a*. The drains of the NMOS transistor **753***a* and the PMOS transistor **753***b* serve as an output node that is the second node SN3 of the inter-chip buffer **703***a*. The drains of the NMOS transistor **753***c* and the PMOS transistor **753***d* are connected to the gates of the NMOS transistor **753***a* and the PMOS transistor **753***b*.

[0756] Referring to FIG. **276**, the inter-chip circuit **200***f* of the circuits **800** may include an inter-chip buffer **704***a* and an inter-chip ESD (electro static discharge) circuit **704***b*. The inter-chip buffer **704***a* has a first node FN4 and a second node SN4, and the inter-chip ESD circuit **704***b* has a node En connected to the first node FN4. The inter-chip buffer **704***a* can be an inter-chip receiver which can be an inverter composed of an NMOS transistor **754***a* and a PMOS transistor **754***b*. The gates of the NMOS transistor **754***a* and the PMOS transistor **754***b* serve as an input node that is the first node FN4 of the inter-chip buffer **704***a*. The drains of the NMOS transistor **754***a* and the PMOS transistor **754***b* serve as an output node that is the second node SN4 of the inter-chip buffer **704***a*.

[0757] Alternatively, the inter-chip buffer **704***a* can be a multi-stage cascade inter-chip receiver including several stages of inverters. For example, referring to FIG. **280**, the inter-chip buffer **704***a* can be a two-stage cascade inter-chip receiver. The first stage **587***a* of the two-stage cascade inter-chip receiver is an inverter composed of the NMOS transistor **754***a* and the PMOS transistor **754***b*, and the second stage **587***b* (the last stage) of the two-stage cascade inter-chip receiver is an inverter composed of an NMOS transistor **754***c* and a PMOS transistor **754***d*. The size of the NMOS transistor **754***c* is larger than that of the NMOS transistor **754***a*, and the size of the PMOS transistor **754***d* is larger than that of the PMOS transistor **754***b*. The gates of the NMOS transistor **754***a* and the PMOS transistor **754***b* serve as an input node that is the first node FN4 of the inter-chip buffer **704***a*. The drains of the NMOS transistor **754***c* and the PMOS transistor **754***d* serve as an output node that is the second node SN4 of the inter-chip buffer **704***a*. The drains of the NMOS transistor **754***a* and the PMOS transistor **754***b* are connected to the gates of the NMOS transistor **754***c* and the PMOS transistor **754***d*.

[0758] Referring to FIG. **276**, the off-chip circuit **57***a* of the circuits **700** may include an off-chip buffer **61***a* and an off-chip ESD (electro static discharge) circuit **59***a*. The off-chip buffer **61***a* has a first node FN5 and a second node SN5, and the off-chip ESD circuit **59***a* has a node En connected to the first node FN5. The off-chip buffer **61***a* can be an off-chip receiver which can be an inverter composed of an NMOS transistor **4205** and a PMOS transistor **4206**. The gates of the NMOS transistor **4205** and the PMOS transistor **4206** serve as an input node that is the first node FN5 of the off-chip buffer **61***a*. The drains of the NMOS transistor **4205** and the PMOS transistor **4206** serve as an output node that is the second node SN5 of the off-chip buffer **61***a*.

[0759] Alternatively, the off-chip buffer **61***a* can be a multi-stage cascade off-chip receiver including several stages of inverters. For example, referring to FIG. **281**, the off-chip buffer **61***a* can be a two-stage cascade off-chip receiver. The first stage **425***a* of the two-stage cascade off-chip receiver is an inverter composed of the NMOS transistor **4205** and the PMOS transistor **4206**, and the second stage **425***b* (the last stage) of the two-stage cascade off-chip receiver is an inverter composed of an NMOS transistor **4207** and a PMOS transistor **4208**. The size of the NMOS transistor **4207** is larger than that of the NMOS transistor **4205**, and the size of the PMOS transistor **4208** is larger than that of the PMOS transistor **4206**. The gates of the NMOS transistor **4205** and the PMOS transistor **4206** serve as an input node that is the first node FN5 of the off-chip buffer **61***a*. The drains of the NMOS transistor **4207** and the PMOS transistor **4208** serve as an output node that is the second node SN5 of the off-chip buffer **61***a*. The drains of the NMOS transistor **4205** and the PMOS

transistor **4206** are connected to the gates of the NMOS transistor **4207** and the PMOS transistor **4208**.

[0760] Referring to FIG. **276**, the off-chip circuit **57***b* of the circuits **700** may include an off-chip buffer **61***b* and an off-chip ESD (electro static discharge) circuit **59***b*. The off-chip buffer **61***b* has a first node FN**6** and a second node SN**6**, and the off-chip ESD circuit **59***b* has a node En connected to the second node SN**6**. The off-chip buffer **61***b* can be an off-chip driver which can be an inverter composed of an NMOS transistor **4203** and a PMOS transistor **4204**. The gates of the NMOS transistor **4203** and the PMOS transistor **4204** serve as an input node that is the first node FN**6** of the off-chip buffer **61***b*, and the drains of the NMOS transistor **4203** and the PMOS transistor **4204** serve as an output node that is the second node SN**6** of the off-chip buffer **61***b*.

[0761] Alternatively, the off-chip buffer **61***b* can be a multi-stage cascade off-chip driver including several stages of inverters. For example, referring to FIG. **282**, the off-chip buffer **61***b* can be a two-stage cascade off-chip driver. The first stage **426***a* of the two-stage cascade off-chip driver is an inverter composed of an NMOS transistor **4201** and a PMOS transistor **4202**, and the second stage **426***b* (the last stage) of the two-stage cascade off-chip driver is an inverter composed of the NMOS transistor **4203** and the PMOS transistor **4204**. The size of the NMOS transistor **4203** is larger than that of the NMOS transistor **4201**, and the size of the PMOS transistor **4204** is larger than that of the PMOS transistor **4202**. The gates of the NMOS transistor **4201** and the PMOS transistor **4202** serve as an input node that is the first node FN**6** of the off-chip buffer **61***b*. The drains of the NMOS transistor **4203** and the PMOS transistor **4204** serve as an output node that is the second node SN**6** of the off-chip buffer **61***b*. The drains of the NMOS transistor **4201** and the PMOS transistor **4202** are connected to the gates of the NMOS transistor **4203** and the PMOS transistor **4204**.

[0762] Referring to FIG. **276**, the off-chip circuit **57***c* of the circuits **800** may include an off-chip buffer **61***c* and an off-chip ESD (electro static discharge) circuit **59***c*. The off-chip buffer **61***c* has a first node FN**7** and a second node SN**7**, and the off-chip ESD circuit **59***c* has a node En connected to the second node SN**7**. The off-chip buffer **61***c* can be an off-chip driver which can be an inverter composed of an NMOS transistor **4303** and a PMOS transistor **4304**. The gates of the NMOS transistor **4303** and the PMOS transistor **4304** serve as an input node that is the first node FN**7** of the off-chip buffer **61***c*. The drains of the NMOS transistor **4303** and the PMOS transistor **4304** serve as an output node that is the second node SN**7** of the off-chip buffer **61***c*.

[0763] Alternatively, the off-chip buffer **61***c* can be a multi-stage cascade off-chip driver including several stages of inverters. For example, referring to FIG. **283**, the off-chip buffer **61***c* can be a two-stage cascade off-chip driver. The first stage **427***a* of the two-stage cascade off-chip driver is an inverter composed of an NMOS transistor **4301** and a PMOS transistor **4302**, and the second stage **427***b* (the last stage) of the two-stage cascade off-chip driver is an inverter composed of the NMOS transistor **4303** and the PMOS transistor **4304**. The size of the NMOS transistor **4303** is larger than that of the NMOS transistor **4301**, and the size of the PMOS transistor **4304** is larger than that of the PMOS transistor **4302**. The gates of the NMOS transistor **4301** and the PMOS transistor **4302** serve as an input node that is the first node FN**7** of the off-chip buffer **61***c*. The drains of the NMOS transistor **4303** and the PMOS transistor **4304** serve as an output node that is the second node SN**7** of the off-chip buffer **61***c*. The drains of the NMOS transistor **4301** and the PMOS transistor **4302** are connected to the gates of the NMOS transistor **4303** and the PMOS transistor **4304**.

[0764] Referring to FIG. **276**, the off-chip circuit **57***d* of the circuits **800** may include an off-chip buffer **61***d* and an off-chip ESD (electro static discharge) circuit **59***d*. The off-chip buffer **61***d* has a first node FN**8** and a second node SN**8**, and the off-chip ESD circuit **59***d* has a node En connected to the first node FN**8**. The off-chip buffer **61***d* can be an off-chip receiver which can be an inverter composed of an NMOS transistor **4305** and a PMOS transistor **4306**. The gates of the NMOS transistor **4305** and the PMOS transistor **4306** serve as an input node that is the first node FN**8** of the off-chip buffer **61***d*. The drains of the NMOS transistor **4305** and the PMOS transistor **4306** serve as an output node that is the second node SN**8** of the off-chip buffer **61***d*.

[0765] Alternatively, the off-chip buffer **61***d* can be a multi-stage cascade off-chip receiver including several stages of inverters. For example, referring to FIG. **284**, the off-chip buffer **61***d* can be a two-stage cascade off-chip receiver. The first stage **428***a* of the two-stage cascade off-chip receiver is an inverter composed of the NMOS transistor **4305** and the PMOS transistor **4306**, and the second stage **428***b* (the last stage) of the two-stage cascade off-chip receiver is an inverter composed of an NMOS transistor **4307** and a PMOS transistor **4308**. The size of the NMOS transistor **4307** is larger than that of the NMOS transistor **4305**, and the size of the PMOS transistor **4308** is larger than that of the PMOS transistor **4306**. The gates of the NMOS transistor **4305** and the PMOS transistor **4306** serve as an input node that is the first node FN**8** of the off-chip buffer **61***d*. The drains of the NMOS transistor **4307** and the PMOS transistor **4308** serve as an output node that is the second node SN**8** of the off-chip buffer **61***d*. The drains of the NMOS transistor **4305** and the PMOS transistor **4306** are connected to the gates of the NMOS transistor **4307** and the PMOS transistor **4308**.

[0766] FIG. **285** is another example of a circuit diagram. The circuit diagram shown in FIG. **285** is similar to that shown in FIG. **276** except that the inter-chip buffers **701***a*, **702***a*, **703***a* and **704***a* shown in FIG. **285** are designed with inter-chip tri-state buffers each including a tri-state driver and a tri-state receiver, instead of the inter-chip receivers and drivers, and the off-chip buffers **61***a*, **61***b*, **61***c* and **61***d* shown in FIG. **285** are designed with off-chip tri-state buffers each including a tri-state driver and a tri-state receiver, instead of the off-chip receivers and drivers. In FIG. **285**, the inter-chip buffer **701***a* of the circuits **700** can be an inter-chip tri-state buffer having a first I/O (input/output) node serving as the first node FN**1** of the inter-chip buffer **701***a*, and having a second I/O node serving as the second node SN**1** of the inter-chip buffer **701***a*. The inter-chip buffer **702***a* of the circuits **700** can be an inter-chip tri-state buffer having a first I/O node serving as the first node FN**2** of the inter-chip buffer **702***a*, and having a second I/O node serving as the second node SN**2** of the inter-chip buffer **702***a*. The inter-chip buffer **703***a* of the circuits **800** can be an inter-chip tri-state buffer having a first I/O node serving as the first node FN**3** of the inter-chip buffer **703***a*, and having a second I/O node serving as the second node SN**3** of the inter-chip buffer **703***a*. The inter-chip buffer **704***a* of the circuits **800** can be an inter-chip tri-state buffer having a first I/O node serving as the first node FN**4** of the inter-chip buffer **704***a*, and having a second I/O node serving as the second node SN**4** of the inter-chip buffer **704***a*. The

off-chip buffer **61***a* of the circuits **700** can be an off-chip tri-state buffer having a first I/O node serving as the first node FN**5** of the off-chip buffer **61***a*, and having a second I/O node serving as the second node SN**5** of the off-chip buffer **61***a*. The off-chip buffer **61***b* of the circuits **700** can be an off-chip tri-state buffer having a first I/O node serving as the first node FN**6** of the off-chip buffer **61***b*, and having a second I/O node serving as the second node SN**6** of the off-chip buffer **61***b*. The off-chip buffer **61***c* of the circuits **800** can be an off-chip tri-state buffer having a first I/O node serving as the first node FN**7** of the off-chip buffer **61***c*, and having a second I/O node serving as the second node SN**7** of the off-chip buffer **61***c*. The off-chip buffer **61***d* of the circuits **800** can be an off-chip tri-state buffer having a first I/O node serving as the first node FN**8** of the off-chip buffer **61***d*, and having a second I/O node serving as the second node SN**8** of the off-chip buffer **61***d*.

[0767] Referring to FIG. **276** or **285**, each of the internal circuits **200***c*, **200***d*, **200***g* and **200***h* can be a NOR gate, a NAND gate, an AND gate, an OR gate, an operational amplifier, a flash memory cell, a dynamic-random-access-memory (DRAM) cell, a static-random-access-memory (SRAM) cell, a non-volatile memory cell, an erasable programmable read-only memory (EPROM) cell, a read-only memory (ROM) cell, a magnetic random access memory (MRAM) cell, a sense amplifier, an analog-to-digital (A/D) converter, a digital-to-analog (D/A) converter, an inverter, an adder, a multiplexer, a diplexer, a multiplier, a complementary-metal-oxide-semiconductor (CMOS) device, a bi-polar CMOS device, a bipolar circuit, or an analog circuit. Each of the internal circuits **200***c*, **200***d*, **200***g* and **200***h* may include a NMOS transistor (n-type metal-oxide-semiconductor transistor) having a ratio of a physical channel width thereof to a physical channel length thereof ranging from, e.g., about 0.1 and 20, ranging from, e.g., about 0.1 and 10, or ranging from, e.g., about 0.2 and 2. Alternatively, each of the internal circuits **200***c*, **200***d*, **200***g* and **200***h* may include a PMOS transistor (p-type metal-oxide-semiconductor transistor) having a ratio of a physical channel width thereof to a physical channel length thereof ranging from, e.g., about 0.2 and 40, ranging from, e.g., about 0.2 and 20, or ranging from, e.g., about 0.4 and 4. Each of the inter-chip ESD circuits **701***b*, **702***b*, **703***b* and **704***b* and each of the off-chip ESD circuits **59***a*, **59***b*, **59***c* and **59***d* may include one or more ESD (electro static discharge) units each composed of two reverse-biased diodes or of a PMOS transistor and an NMOS transistor.

[0768] The first node FN**1** of the inter-chip buffer **701***a* can be connected to the node En of the inter-chip ESD circuit **701***b*, to a first terminal F**1** of the testing interface circuit **333***a* through a metal interconnect **740***b* of the circuits **700**, and to the contact point P**1** of the circuits **700** through the metal interconnect **740***b*. The second node SN**1** of the inter-chip buffer **701***a* can be connected to the internal circuit **200***c* through a metal interconnect **740***a* of the circuits **700**.

[0769] The first node FN**2** of the inter-chip buffer **702***a* can be connected to the internal circuit **200***d* through a metal interconnect **740***c* of the circuits **700**. The second node SN**2** of the inter-chip buffer **702***a* can be connected to the node En of the inter-chip ESD circuit **702***b*, to a first terminal F**2** of the testing interface circuit **333***b* through a metal interconnect **740***d* of the circuits **700**, and to the contact point P**2** of the circuits **700** through the metal interconnect **740***d*.

[0770] The first node FN**3** of the inter-chip buffer **703***a* can be connected to the internal circuit **200***g* through a metal interconnect **740***e* of the circuits **800**. The second node SN**3** of the inter-chip buffer **703***a* can be connected to the node En of the inter-chip ESD circuit **703***b*, to a first terminal F**3** of the testing interface circuit **333***c* through a metal interconnect **740***f* of the circuits **800**, and to the contact point P**3** of the circuits **800** through the metal interconnect **740***f*.

[0771] The first node FN**4** of the inter-chip buffer **704***a* can be connected to the node En of the inter-chip ESD circuit **704***b*, to a first terminal F**4** of the testing interface circuit **333***d* through a metal interconnect **740***h* of the circuits **800**, and to the contact point P**4** of the circuits **800** through the metal interconnect **740***h*. The second node SN**4** of the inter-chip buffer **704***a* can be connected to the internal circuit **200***h* through a metal interconnect line **740***g* of the circuits **800**.

[0772] The first node FN**5** of the off-chip buffer **61***a* can be connected to the node En of the off-chip ESD circuit **59***a*, and to the contact point P**5** of the circuits **700** through a metal interconnect **740***j* of the circuits **700**. The second node SN**5** of the off-chip buffer **61***a* can be connected to a second terminal S**1** of the testing interface circuit **333***a* through a metal interconnect **740***i* of the circuits **700**.

[0773] The first node FN**6** of the off-chip buffer **61***b* can be connected to a second terminal S**2** of the testing interface circuit **333***b* through a metal interconnect **740***k* of the circuits **700**. The second node SN**6** of the off-chip buffer **61***b* can be connected to the node En of the off-chip ESD circuit **59***b* and to the contact point P**6** of the circuits **700** through a metal interconnect **740***m* of the circuits **700**.

[0774] The first node FN**7** of the off-chip buffer **61***c* can be connected to a second terminal S**3** of the testing interface circuit **333***c* through a metal interconnect **740***n* of the circuits **800**. The second node SN**7** of the off-chip buffer **61***c* can be connected to the node En of the off-chip ESD circuit **59***c* and to the contact point P**7** of the circuits **800** through a metal interconnect **740***p* of the circuits **800**.

[0775] The first node FN**8** of the off-chip buffer **61***d* can be connected to the node En of the off-chip ESD circuit **59***d* and to the contact point P**8** of the circuits **800** through a metal interconnect **740***r* of the circuits **800**. The second node SN**8** of the off-chip buffer **61***d* can be connected to a second terminal S**4** of the testing interface circuit **333***d* through a metal interconnect **740***q* of the circuits **800**.

[0776] The metal interconnects **740***a*, **740***b*, **740***c*, **740***d*, **740***i*, **740***j*, **740***k*, and **740***m* of the circuits **700** can be provided by the layers **26** and **34** and the via plugs **26***a* and **34***a* of the chip **68** while the circuits **700** are provided in the chip **68**; alternatively, the metal interconnects **740***a*, **740***b*, **740***c*, **740***d*, **740***i*, **740***j*, **740***k*, and **740***m* of the circuits **700** can be provided by the layers **106** and **114** and the via plugs **106***a* and **114***a* of the chip **72** while the circuits **700** are provided in the chip **72**; alternatively, the metal interconnects **740***a*, **740***b*, **740***c*, **740***d*, **740***i*, **740***j*, **740***k*, and **740***m* of the circuits **700** can be provided by the layers **17** and **19** and the via plugs **17***a* and **19***a* of the chip **118** while the circuits **700** are provided in the chip **118**.

[0777] The metal interconnects **740***e*, **740***f*, **740***g*, **740***h*, **740***n*, **740***p*, **740***q*, and **740***r* of the circuits **800** can be provided by the layers **26** and **34** and the via plugs **26***a* and **34***a* of the chip **68** while the circuits **800** are provided in the chip **68**; alternatively, the metal interconnects **740***e*, **740***f*, **740***g*, **740***h*, **740***n*, **740***p*, **740***q*, and **740***r* of the circuits **800** can be provided by the layers **106** and **114** and the via plugs **106***a* and **114***a* of the chip **72** while the circuits **800** are provided in the chip **72**; alternatively, the metal interconnects **740***e*, **740***f*, **740***g*, **740***h*, **740***n*, **740***p*, **740***q*, and **740***r* of the circuits **800**

can be provided by the layers **17** and **19** and the via plugs **17***a* and **19***a* of the chip **118** while the circuits **800** are provided in the chip **118**.

[0778] The small inter-chip buffers **701***a*, **702***a*, **703***a* and **704***a* are designed in the circuits **700** and **800** for signal, clock or data transmission between the circuits **700** and **800**. The total number of inter-chip buffers including the inter-chip buffers **701***a* and **702***a* on the chip having the circuits **700** may be equal to or more than, e.g., 512, and preferably equal to or more than, e.g., 1024. The total number of inter-chip buffers including the inter-chip buffers **703***a* and **704***a* on the chip having the circuits **800** may be equal to or more than, e.g., 512, and preferably equal to or more than, e.g., 1024.

[0779] The large off-chip buffers **61***a*, **61***b*, **61***c* and **61***d*, such as off-chip drivers, off-chip receivers or off-chip tri-sate buffers, are designed in the circuits **700** and **800** for circuit testing and/or for signal, clock or data transmission from/to an external circuit of the system-in package or multichip module, such as mother board, metal substrate, glass substrate, ceramic substrate or the previously described carrier **176**, through the previously described solder bumps or balls **126**, through the previously described metal bumps **672**, or through the previously described wirebonded wires **184**. The testing circuit is either (i) the wafer level testing performed before the chip having the circuits **700** or **800** is sawed or diced apart from a wafer, or (ii) the package level testing (the final testing) after the chip having the circuits **700** and the chip having the circuits **800** are connected to each other.

[0780] The testing interface circuits **333***a* and **333***b* are designed in the circuits **700**, and the testing interface circuits **333***c* and **333***d* are designed in the circuits **800**. The output capacitance at the first terminal F**1** or F**4** of the testing interface circuit **333***a* or **333***d* shown in FIG. **276** as seen from the inter-chip buffer **701***a* or **704***a* is less than 2 pF, exemplary less than 1 pF or less than 0.2 pF. The output loading capacitance of the first terminal F**1** or F**4** of the testing interface circuit **333***a* or **333***d* shown in FIG. **276** is less than 2 pF, exemplary less than 1 pF or less than 0.2 pF. The input capacitance at the first terminal F**2** or F**3** of the testing interface circuit **333***b* or **333***c* shown in FIG. **276** as seen from the inter-chip buffer **702***a* or **703***a* is less than 2 pF, exemplary less than 1 pF or less than 0.2 pF. The input loading capacitance of the first terminal F**2** or F**3** of the testing interface circuit **333***b* or **333***c* shown in FIG. **276** is less than 2 pF, exemplary less than 1 pF or less than 0.2 pF. The input or output capacitance at the first terminal F**1**, F**2**, F**3** or F**4** of the testing interface circuit **333***a*, **333***b*, **333***c* or **333***d* shown in FIG. **285** as seen from the inter-chip buffer **701***a*, **702***a*, **703***a* or **704***a* is less than 2 pF, exemplary less than 1 pF or less than 0.2 pF. The input or output loading capacitance of the first terminal F**1**, F**2**, F**3** or F**4** of the testing interface circuit **333***a*, **333***b*, **333***c* or **333***d* shown in FIG. **285** is less than 2 pF, exemplary less than 1 pF or less than 0.2 pF. Each of the test interface circuits **333***a*, **333***b*, **333***c* and **333***d* shown in FIG. **276** or **285** can be a scan test circuit, and the scan test circuit can be used for scan testing performed at the wafer level testing, via the contact point P**5**, P**6**, P**7** or P**8** connecting to a testing probe, before the chip having the circuits **700** or **800** is sawed or diced apart from a wafer or at the package level testing (the final testing) after the chip having the circuits **700** and the chip having the circuits **800** are connected to each other using the previously described process. The scan test circuit is used to test flip flops by input the scan-in signal or output the scan-out signal.

[0781] Referring to FIG. **276** or **285**, the metal interconnects **350** can be used for clock lines or interconnects, or for signal lines or interconnects, such as bit lines, bit interconnects, address lines or address interconnects.

[0782] The total number of bit lines or bit interconnects, provided by the two metal interconnects **350**, in parallel data communication between the chip having the circuits **700** and the chip having the circuit **800** can be two, for example, as shown in FIG. **276** or **285**. In this case, the bit width of the parallel data communication between the chip having the circuits **700** and the chip having the circuits **800** is two. Alternatively, the total number of the bit lines or bit interconnects in parallel data communication between the chip having the circuits **700** and the chip having the circuit **800** can be equal to or more than 4, 8, 16, 32, 64, 128, 256, 512 or 1024; that means the bit width of the parallel data communication can be equal to or more than 4, 8, 16, 32, 64, 128, 256, 512 or 1024. Note that, in these alternatives, only two bit lines or bit interconnects **350** (and their corresponding inter-chip buffers **701***a*, **702***a*, **703***a* and **704***a*) are shown in FIG. **276** or **285**, and other bit lines or bit interconnects (and their corresponding inter-chip buffers) are not shown in FIG. **276** or **285**, but they (and their corresponding inter-chip buffers) are designed as same as the two bit lines or bit interconnects **350** (and their corresponding inter-chip buffers **701***a*, **702***a*, **703***a* and **704***a*) shown in FIG. **276** or **285**. Each of the metal interconnects **350** used for the bit lines or bit interconnects connects the inter-chip buffer **701***a* or **702***a* of the circuits **700** to the inter-chip buffer **703***a* or **704***a* of the circuits **800**. As an example of a case of bit width of 1024, there are 1024 inter-chip buffers, such as **701***a* or **702***a*, of the chip having the circuits **700**, connected to 1024 bit lines or bit interconnects, such as **350**, and then connected to 1024 inter-chip buffers, such as **703***a* or **704***a*, of the chip having the circuits **800**. Accordingly, the total number of the inter-chip buffers **701***a* and **702***a* connected with the bit lines or bit interconnects in parallel data communication between the chip having the circuits **700** and the chip having the circuits **800** is equal to the total number of the bit lines or bit interconnects, and is also equal to the total number of the inter-chip buffers **703***a* and **703***a* connected with the bit lines or bit interconnects. The data communication of the bit lines or bit interconnects, like the metal interconnects **350**, between the chip having the circuits **700** and the chip having the circuits **800** may have a data bit width equal to or more than e.g., 2, 4, 8, 16, 32, 64, 128, 256, 512 or 1024, and preferably equal to or more than 512 or 1024.

[0783] Referring to FIG. **276** or **285**, the small inter-chip ESD circuits **701***b*, **702***b*, **703***b* and **704***b* are used for the small inter-chip buffers **701***a*, **702***a*, **703***a* and **704***a* between the chip having the circuits **700** and the chip having the circuits **800** for electrostatic charge protection during the chip packaging or assembly manufacturing process. Alternatively, no ESD circuit can be required for the small inter-chip buffers **701***a*, **702***a*, **703***a* and **704***a* between the chip having the circuits **700** and the chip having the circuits **800**, that is, the inter-chip ESD circuits **701***b*, **702***b*, **703***b* and **704***b* can be omitted. In other words, there is no ESD circuit connected to the metal interconnects **740***b*, **740***d*, **740***f* and **740***h*.

[0784] The large off-chip ESD circuits **59***a*, **59***b*, **59***c* and **59***d* required for the large off-chip buffers **61***a*, **61***b*, **61***c*, and **61***d* are designed in both the circuits **700** and **800** for the circuit testing and/or for signal, clock or data transmission from/to an external circuit of the system-in package or mul-

tichip module, such as mother board, metal substrate, glass substrate, ceramic substrate or the previously described carrier **176**, through the previously described solder bumps or balls **126**, through the previously described metal bumps **672**, or through the previously described wirebonded wires **184**. The circuit testing is either (i) the wafer level testing performed before the chip having the circuits **700** or **800** is sawed or diced apart from a wafer, or (ii) the package level testing (the final testing) after the chip having the circuits **700** and the chip having the circuits **800** are connected to each other. The large off-chip ESD circuits **59***a*, **59***b*, **59***c* and **59***d* are used for electrostatic charge protection during the circuit testing, such as the wafer level testing or the package level testing (the final testing).

[0785] The size of the small inter-chip ESD circuit **701***b*, **702***b*, **703***b* or **704***b* can be less than the size of the large off-chip ESD circuit **59***a*, **59***b*, **59***c* or **59***d*, respectively. For example, the size of the inter-chip ESD circuit **701***b*, **702***b*, **703***b* or **704***b* can be defined as the loading or capacitance of the inter-chip ESD circuit **701***b*, **702***b*, **703***b* or **704***b*, and the size of the off-chip ESD circuit **59***a*, **59***b*, **59***c* or **59***d* can be defined as the loading or capacitance of the off-chip ESD circuit **59***a*, **59***b*, **59***c* or **59***d*. In a case, each of the small inter-chip ESD circuits **701***b*, **702***b*, **703***b* and **704***b* has a size (loading or capacitance) less than 2 pF (pico Farads), such as between 0.01 and 2 pF, exemplary less than 0.5 pF, such as between 0.01 and 0.5 pF, and each of the large off-chip ESD circuits **59***a*, **59***b*, **59***c* and **59***d* has a size (loading or capacitance) larger than 2 pF, such as between 2 and 100 pF, exemplary larger than 5 pF, such as between 5 and 100 pF. In another case, each of the small inter-chip ESD circuits **701***b*, **702***b*, **703***b* and **704***b* has a size (loading or capacitance) less than 1 pF, such as between 0.01 and 1 pF, and each of the large off-chip ESD circuits **59***a*, **59***b*, **59***c* and **59***d* has a size (loading or capacitance) larger than 1 pF, such as between 1 and 100 pF.

[0786] Alternatively, the size of the small inter-chip ESD circuit **701***b*, **702***b*, **703***b* or **704***b* or the size of the large off-chip ESD circuit **59***a*, **59***b*, **59***c* or **59***d* can be defined as below. An ESD (electro static discharge) circuit, such as the inter-chip ESD circuit **701***b*, **702***b*, **703***b* or **704***b* or the off-chip ESD circuit **59***a*, **59***b*, **59***c* or **59***d*, may include one or more ESD units, and each of the ESD units may include a P^+ active region and an N^+ active region connected to the P^+ active region and to an I/O (input/output) contact point or testing contact point, such as the contact point P**1**, P**2**, P**3**, P**4**, P**5**, P**6**, P**7** or P**8** shown in FIG. **276** or **285**, of a chip. The area of the P^+ active region plus the area of the N^+ active region equals the active area of each of the ESD units. The total of the active areas of the ESD units equals the active area of the ESD circuit. If the ESD circuit is composed of only one ESD unit, the active area of the ESD circuit equals the active area of the only one ESD unit. If the ESD circuit is composed of multiple ESD units, the active area of the ESD circuit equals the total of the active areas of the ESD units connected in parallel. The active area of the ESD circuit can be used to define the size of the ESD circuit. FIGS. **286**-**291** show how to calculate the active area of an ESD unit of a chip and define the size of an ESD circuit composed of one or more the ESD units.

[0787] Referring to FIG. **286**, an electro static discharge (ESD) unit **759** of a chip can be composed of two reverse-biased diodes **5931** and **5932**. FIG. **288** shows a cross-sectional view of the ESD unit **759** shown in FIG. **286**, and FIG. **289** is a top perspective view showing the topography of the ESD unit **759** derived from the top surface Z-Z' of a p-type silicon substrate **401** shown in FIG. **288**.

[0788] Referring to FIGS. **286**, **288** and **289**, the ESD unit **759** includes two P^+ active regions **757***a* and **757***b* and two N^+ active regions **758***a* and **758***b*. The P^+ active region **757***a* is in an N-well **755** in the p-type silicon substrate **401**, and the N^+ active region **758***a* is in the p-type silicon substrate **401**. The P^+ active region **757***a* is connected to an I/O contact point or testing contact point, such as the contact point P**1**, P**2**, P**3** or P**4** of the circuits **700** shown in FIG. **276** or **285** or the contact point P**5**, P**6**, P**7** or P**8** of the circuits **800** shown in FIG. **276** or **285**, of the chip through a metal interconnect **763***a* of the chip. The N^+ active region **758***a* is connected to the P^+ active region **757***a* and to the I/O contact point or testing contact point of the chip through the metal interconnect **763***a*. The metal interconnect **763***a* includes a fine-line metal layer **660***a* formed on a dielectric layer **330** over the p-type silicon substrate **401**, a first via plug **661** formed on a contact region **764***a* of the P^+ active region **757***a* and in the dielectric layer **330**, and a second via plug **661** formed on a contact region **764***b* of the N^+ active region **758***a* and in the dielectric layer **330**. The P^+ active region **757***b* is in the p-type silicon substrate **401**, and the N^+ active region **758***b* is in the N-well **755** in the p-type silicon substrate **401**. The P^+ active region **757***b* is connected to a ground bus through a metal interconnect **763***b*, and the N^+ active region **758***b* is connected to a power bus through a metal interconnect **763***c*. The metal interconnect **763***b* contains a fine-line metal layer **660***b* formed on the dielectric layer **330** over the p-type silicon substrate **401**, and a third via plug **661** formed on a contact region **764***c* of the P^+ active region **757***b* and in the dielectric layer **330**. The metal interconnect **763***c* contains a fine-line metal layer **660***c* formed on the dielectric layer **330** over the p-type silicon substrate **401**, and a fourth via plug **661** formed on a contact region **764***d* of the N^+ active region **758***b* and in the dielectric layer **330**.

[0789] Referring to FIG. **289**, the P^+ active region **757***a*, connected to the I/O contact point or testing contact point of the chip, has an area AR**1**, from a top view, enclosed by a field oxide **762** in the p-type silicon substrate **401**. The N^+ active region **758***a*, connected to the I/O contact point or testing contact point of the chip, has an area AR**2**, from a top view, enclosed by the field oxide **762** in the p-type silicon substrate **401**. The active area of the ESD unit **759** equals the area AR**1** plus the area AR**2**.

[0790] Alternatively, referring to FIG. **287**, the ESD unit **759** of the chip can be composed of a PMOS transistor **681** and an NMOS transistor **682**. FIG. **290** shows a cross-sectional view of the ESD unit **759** shown in FIG. **287**, and FIG. **291** is a top perspective view showing the topography of the ESD unit **759** derived from the top surface Z-Z' of the p-type silicon substrate **401** shown in FIG. **290**.

[0791] Referring to FIGS. **287**, **290** and **291**, the PMOS transistor **681** of the ESD unit **759** includes a gate **761***a* and two P^+ active regions **757***a* and **757***c* at two opposite sides of the gate **761***a*, and the NMOS transistor **682** of the ESD unit **759** includes a gate **761***b* and two N^+ active regions **758***a* and **758***c* at two opposite sides of the gate **761***b*. The P^+ active region **757***a* is in an N-well **755** in the p-type silicon substrate **401**, and the N^+ active region **758***a* is in the p-type silicon substrate **401**. The P^+ active region **757***a* is connected to an I/O contact point or testing contact point, such as the contact point P**1**, P**2**, P**3** or P**4** of the circuits **700** shown in FIG. **276** or **285** or the contact point P**5**, P**6**, P**7** or P**8** of the circuits **800**

shown in FIG. **276** or **285**, of the chip through a metal interconnect **763***a* of the chip. The N^+ active region **758***a* is connected to the P^+ active region **757***a* and to the I/O contact point or the testing contact point of the chip through the metal interconnect **763***a*. The metal interconnect **763***a* contains a fine-line metal layer **660***a* formed on a dielectric layer **330** over the p-type silicon substrate **401**, a first via plug **661** formed on a contact region **764***a* of the P^+ active region **757***a* and in the dielectric layer **330**, and a second via plug **661** formed on a contact region **764***b* of the N^+ active region **758***a* and in the dielectric layer **330**. The P^+ active region **757***b* is in the p-type silicon substrate **401**, and the N^+ active region **758***b* is in the N-well **755** in the p-type silicon substrate **401**. The P^+ active region **757***c* is in the N-well **755** in the p-type silicon substrate **401**, and the N^+ active region **758***c* is in the p-type silicon substrate **401**. The N^+ active region **758***c* is connected to a ground bus of the chip through a metal interconnect **763***b* of the chip and to the P^+ active region **757***b* through the metal interconnect **763***b*, and the P^+ active region **757***b* is connected to the ground bus through the metal interconnect **763***b*. The P^+ active region **757***c* is connected to a power bus of the chip through a metal interconnect **763***c* of the chip and to the N^+ active region **758***b* through the metal interconnect **763***c*, and the N^+ active region **758***b* is connected to the power bus through the metal interconnect **763***c*. The metal interconnect **763***b* contains a fine-line metal layer **660***b* formed on the dielectric layer **330** over the p-type silicon substrate **401**, a third via plug **661** formed on a contact region **764***c* of the P^+ active region **757***b* and in the dielectric layer **330**, and a fourth via plug **661** formed on a contact region **764***e* of the N^+ active region **758***c* and in the dielectric layer **330**. The metal interconnect **763***c* contains a fine-line metal layer **660***c* formed on the dielectric layer **330** over the p-type silicon substrate **401**, a fifth via plug **661** formed on a contact region **764***d* of the N^+ active region **758***b*, and a sixth via plug **661** formed on a contact region **764***f* of the P^+ active region **757***c*. The gate **761***a* has a contact region **764***g* connected to the power bus of the chip and to the contact regions **764***d* and **764***f* through the metal interconnect **763***c*. The gate **761***b* has a contact region **764***h* connected to the ground bus of the chip and to the contact regions **764***c* and **764***e* through the metal interconnect **763***b*.

[0792] Referring to FIG. **291**, the P^+ active region **757***a*, connected to the I/O contact point or testing contact point of the chip, has an area AR**3**, from a top view, enclosed by the boundary defined by a sidewall **748** of the gate **761***a* and the border between a field oxide **762** and the P^+ active region **757***a*. The N^+ active region **758***a*, connected to the I/O contact point or testing contact point of the chip, has an area AR**4**, from a top view, enclosed by the boundary defined by a sidewall **749** of the gate **761***b* and the border between the field oxide **762** and the N^+ active region **758***a*. The active area of the ESD unit **759** equals the area AR**3** plus the area AR**4**.

[0793] Based on the previously described definition or calculation illustrated in FIGS. **286-291**, the active area of each of ESD units of an ESD circuit can be calculated, and the total of active areas of the ESD units equals the active area of the ESD circuit. If the ESD circuit is composed of only one ESD unit, the active area of the ESD circuit equals the active area of the only one ESD unit. If the ESD circuit is composed of multiple ESD units, the active area of the ESD circuit equals the total of the active areas of the ESD units connected in parallel.

[0794] Accordingly, the active area of each of the inter-chip ESD circuits **701***b*, **702***b*, **703***b* and **704***b* and the active area of each of the off-chip ESD circuits **59***a*, **59***b*, **59***c* and **59***d* can be calculated. For example, the small inter-chip ESD circuit **701***b*, **702***b*, **703***b* or **704***b* may have an active area less than 1300 square millimeters, such as between 6.5 and 1300 square millimeters, exemplary less than 325 square millimeters, such as between 6.5 and 325 square millimeters, and the large off-chip ESD circuit **59***a*, **59***b*, **59***c* or **59***d* may have an active area larger than 1300 square millimeters, such as between 1300 and 65,000 square millimeters, exemplary larger than 3250 square millimeters, such as between 3250 and 65,000 square millimeters. Alternatively, the small inter-chip ESD circuit **701***b*, **702***b*, **703***b* or **704***b* may have an active area less than 650 square millimeters, and the large off-chip ESD circuit **59***a*, **59***b*, **59***c* or **59***d* may have an active area larger than 650 square millimeters.

[0795] The size of the large off-chip ESD circuit **59***a* of the circuits **700**, defined as the total of the active areas of the one or more ESD units in the large off-chip ESD circuit **59***a* or the loading or capacitance of the large off-chip ESD circuit **59***a*, can be larger than the size of the small inter-chip ESD circuit **701***b* of the circuits **700**, defined as the total of the active areas of the one or more ESD units in the small inter-chip ESD circuit **701***b* or the loading or capacitance of the small inter-chip ESD circuit **701***b*, by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 50 times.

[0796] The size of the large off-chip ESD circuit **59***b* of the circuits **700**, defined as the total of the active regions of the one or more ESD units in the large off-chip ESD circuit **59***b* or the loading or capacitance of the large off-chip ESD circuit **59***b*, can be larger than the size of the small inter-chip ESD circuit **702***b* of the circuits **700**, defined as the total of the active regions of the one or more ESD units in the small inter-chip ESD circuit **702***b* or the loading or capacitance of the small inter-chip ESD circuit **702***b*, by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 50 times.

[0797] The size of the large off-chip ESD circuit **59***c* of the circuits **800** defined as the total of the active regions of the one or more ESD units in the large off-chip ESD circuit **59***c* or the loading or capacitance of the large off-chip ESD circuit **59***c*, can be larger than the size of the small inter-chip ESD circuit **703***b* of the circuits **800**, defined as the total of the active regions of the one or more ESD units in the small inter-chip ESD circuit **703***b* or the loading or capacitance of the small inter-chip ESD circuit **703***b*, by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 50 times.

[0798] The size of the large off-chip ESD circuit **59***d* of the circuits **800** defined as the total of the active regions of the one or more ESD units in the large off-chip ESD circuit **59***d* or the loading or capacitance of the large off-chip ESD circuit **59***d*, can be larger than the size of the small inter-chip ESD circuit **704***b* of the circuits **800**, defined as the total of the active regions of the one or more ESD units in the small inter-chip ESD circuit **704***b* or the loading or capacitance of the small inter-chip ESD circuit **704***b*, by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 50 times.

[0799] Referring to FIG. **276**, the size of the inter-chip buffer **702***a* or **703***a* can be characterized by the load or loading of the inter-chip buffer **702***a* or **703***a*. The load or loading of the inter-chip buffer **702***a* or **703***a* is total equivalent capacitance load of the inter-chip buffer **702***a* or **703***a*. The load or loading (capacitance) of the inter-chip buffer

702*a* or **703***a*, such as the load or loading (capacitance) of the last stage inverter **585***b* or **586***b*, with drains of the NMOS transistor **752***a* or **753***a* and the PMOS transistor **752***b* or **753***b* connected to the contact point P**2** or P**3**, of the two-stage cascade inter-chip driver shown in FIG. **278** or **279**, can be less than 10 pF, such as between 0.01 pF and 10 pF or between 0.1 pF and 5 pF, less than 2 pF, such as between 0.001 pF and 2 pF, or less than 1 pF, such as between 0.01 pF and 1 pF. The size of the inter-chip buffer **701***a* or **704***a* can be characterized by an input capacitance (loading) of the inter-chip buffer **701***a* or **704***a*, and the input capacitance (loading) of the inter-chip buffer **701***a* or **704***a* may be less than 10 pF, such as between 0.01 pF and 10 pF or between 0.1 pF and 5 pF, less than 2 pF, such as between 0.001 pF and 2 pF, or less than 1 pF, such as between 0.01 pF and 1 pF.

[0800] Referring to FIG. **285**, the size of the inter-chip buffer **701***a*, **702***a*, **703***a* or **704***a* can be characterized by the load or loading of the inter-chip buffer **701***a*, **702***a*, **703***a* or **704***a*. The load or loading of the inter-chip buffer **701***a*, **702***a*, **703***a* or **704***a* is total equivalent capacitance load of the inter-chip buffer **701***a*, **702***a*, **703***a* or **704***a*. The load or loading (capacitance) of the inter-chip buffer **701***a*, **702***a*, **703***a* or **704***a*, such as the load or loading (capacitance) of a last stage tri-state driver, with drains of an NMOS transistor and a PMOS transistor connected to the contact point P**1**, P**2**, P**3** or P**4**, of a multi-stage cascade tri-state buffer, can be less than 10 pF, such as between 0.01 pF and 10 pF or between 0.1 pF and 5 pF, less than 2 pF, such as between 0.001 pF and 2 pF, or less than 1 pF, such as between 0.01 pF and 1 pF.

[0801] Referring to FIG. **276**, the size of the off-chip buffer **61***b* or **61***c* can be characterized by the load or loading of the off-chip buffer **61***b* or **61***c*. The load or loading of the off-chip buffer **61***b* or **61***c* is total equivalent capacitance load of the off-chip buffer **61***b* or **61***c*. The load or loading (capacitance) of the off-chip buffer **61***b* or **61***c*, such as the load or loading (capacitance) of the last stage driver **426***b* or **427***b*, with drains of the NMOS transistor **4203** or **4303** and the PMOS transistor **4204** or **4304** connected to the contact point P**6** or P**7**, of the multi-stage cascade off-chip driver shown in FIG. **282** or **283**, can be larger than 10 pF, such as between 10 pF and 100 pF, larger than 2 pF, such as between 2 and 100 pF, or larger than 1 pF, such as between 1 pF and 100 pF. The size of the off-chip buffer **61***a* or **61***d* can be characterized by an input capacitance (loading) of the off-chip buffer **61***a* or **61***d*, and the input capacitance (loading) of the off-chip buffer **61***a* or **61***d* may be larger than 10 pF, such as between 10 pF and 100 pF, larger than 2 pF, such as between 2 and 100 pF, or larger than 1 pF, such as between 1 pF and 100 pF.

[0802] Referring to FIG. **285**, the size of the off-chip buffer **61***a*, **61***b*, **61***c* or **61***d* can be characterized by the load or loading of the off-chip buffer **61***a*, **61***b*, **61***c* or **61***d*. The load or loading of the off-chip buffer **61***a*, **61***b*, **61***c* or **61***d* is total equivalent capacitance load of the off-chip buffer **61***a*, **61***b*, **61***c* or **61***d*. The load or loading (capacitance) of the off-chip buffer **61***a*, **61***b*, **61***c* or **61***d*, such as the load or loading (capacitance) of a last stage tri-state driver, with drains of an NMOS transistor and a PMOS transistor connected to the contact point P**5**, P**6**, P**7** or P**8**, of a multi-stage cascade tri-state buffer, can be larger than 10 pF, such as between 10 pF and 100 pF, larger than 2 pF, such as between 2 and 100 pF, or larger than 1 pF, such as between 1 pF and 100 pF.

[0803] The load or loading (capacitance) of the off-chip buffer **61***b* shown in FIG. **276** or **285** is larger than the load or loading (capacitance) of the inter-chip buffer **702***a* shown in FIG. **276** or **285** by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times. The load or loading (capacitance) of the off-chip buffer **61***c* shown in FIG. **276** or **285** is larger than the load or loading (capacitance) of the inter-chip buffer **703***a* shown in FIG. **276** or **285** by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0804] Referring to FIG. **276** or **285**, the size of the inter-chip buffer **702***a* or **703***a* can be characterized by a peak drive current of the inter-chip buffer **702***a* or **703***a*, and the size of the off-chip buffer **61***b* or **61***c* can be characterized by a peak drive current of the off-chip buffer **61***b* or **61***c*. The peak drive current of the off-chip buffer **61***b* or **61***c* is larger than the peak drive current of the inter-chip buffer **702***a* or **703***a* by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0805] For example, regarding to the inter-chip buffer **702***a* shown in FIG. **276**, when the PMOS transistor **752***b* is on and the NMOS transistor **752***a* is off, the previously described load or loading driven by the inter-chip buffer **702***a* is charged with a charging current. When the NMOS transistor **752***a* is on and the PMOS transistor **752***b* is off, the load or loading the previously described load or loading driven by the inter-chip buffer **702***a* is discharged with a discharging current. The peak charging or discharging current (a function of bias-voltages) of the NMOS transistor **752***a* or PMOS transistor **752***b* can be used to define the peak drive current of the inter-chip buffer **702***a*. Regarding to the off-chip buffer **61***b* shown in FIG. **276**, when the PMOS transistor **4204** is on and the NMOS transistor **4203** is off, the previously described load or loading driven by the off-chip buffer **61***b* is charged with a charging current. When the NMOS transistor **4203** is on and the PMOS transistor **4204** is off, the previously described load or loading driven by the off-chip buffer **61***b* is discharged with a discharging current. The peak charging or discharging current (a function of bias-voltages) of the NMOS transistor **4203** or PMOS transistor **4204** can be used to define the peak drive current of the off-chip buffer **61***b*. The peak drive current of the off-chip buffer **61***b* is larger than the peak drive current of the inter-chip buffer **702***a* by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0806] Referring to FIG. **276** or **285**, the size of the inter-chip buffer **702***a* or **703***a* can be characterized by an on-resistance of a transistor in the last stage driver of the inter-chip buffer **702***a* or **703***a*, and the size of the off-chip buffer **61***b* or **61***c* can be characterized by an on-resistance of a transistor in the last stage driver of the off-chip buffer **61***b* or **61***c*. The on-resistance of the off-chip buffer **61***b* or **61***c* is larger than the on-resistance of the inter-chip buffer **702***a* or **703***a* by more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0807] For example, regarding to the inter-chip buffer **702***a* shown in FIG. **276**, when the PMOS transistor **752***b* is on and the NMOS transistor **752***a* is off, the previously described load or loading driven by the inter-chip buffer **702***a* is charged, and the PMOS transistor **752***b* is equivalent to a resister with an on-resistance. When the NMOS transistor **752***a* is on and the PMOS transistor **752***b* is off, the previously described load or loading driven by the inter-chip buffer **702***a* is discharged, and the NMOS transistor **752***a* is equivalent to a resister with resistance of an on-resistance. The on-resistance (a function of bias-voltages) of the NMOS transistor **752***a* or PMOS transistor **752***b* can be used to characterize the

size of the inter-chip buffer **702***a*. Regarding to the off-chip buffer **61***b* shown in FIG. **276**, when the PMOS transistor **4204** is on and the NMOS transistor **4203** is off, the previously described load or loading driven by the off-chip buffer **61***b* is charged, and the PMOS transistor **4204** is equivalent to a resister with an on-resistance. When the NMOS transistor **4203** is on and the PMOS transistor **4204** is off, the previously described load or loading driven by the off-chip buffer **61***b* is discharged, and the NMOS transistor **4203** is equivalent to a resister with an on-resistance. The on-resistance (a function of bias-voltages) of the NMOS transistor **4203** or PMOS transistor **4204** can be used to characterize the size of the off-chip buffer **61***b*.

[0808] Referring to FIG. **276** or **285**, the size of the inter-chip buffer **701***a*, **702***a*, **703***a* or **704***a* or the size of the off-chip buffer **61***a*, **61***b*, **61***c* or **61***d* can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor. FIG. **292** or **293** shows how to define or calculate a physical channel width and a physical channel length of an NMOS transistor or PMOS transistor.

[0809] FIG. **292** or **293** shows a top view of a MOS transistor (metal-oxide-semiconductor transistor) that can be a PMOS transistor or an NMOS transistor. Referring to FIG. **292**, a MOS transistor of a chip includes an active region **600**, diffusion region, in a semiconductor substrate of the chip, a field oxide region **602** in the semiconductor substrate and around the active region **600**, a gate **604** on the field oxide region **602** and across the active region **600**, and a gate oxide (not shown) between the active region **600** and the gate **604**. The active region **600** can be defined as a source **606** at a side of the gate **604**, and a drain **608** at the other side of the gate **604**. The material of the gate **604** may be poly silicon, metal silicide or composite layer of above materials, and the metal silicide may be NiSi, CoS, $TiSi_2$ or WSi. Alternatively, the material of the gate **604** may be a metal, such as W, WN, TiN, Ta, TaN, Mo, or alloy or composite layer of above materials. The material of the gate oxide may be silicon oxide or high k oxide, such as Hf containing oxide. The Hf containing oxide may be HfO_2, HfSiON or HfSiO. The reference mark of W is defined as the physical channel width of the MOS transistor, the length of the gate **604** crossing over the diffusion region **600**; the reference mark of L is defined as the physical channel length of the MOS transistor, the width of the gate **604** over the diffusion region **600**.

[0810] Referring to FIG. **293**, alternatively, a MOS transistor may include a gate **604** with multiple portions $\mathbf{604}_1$-$\mathbf{604}_n$ over one or more diffusion regions **600**. The reference marks of W_1-W_n are defined as the physical channel width of each portion $\mathbf{604}_1$-$\mathbf{604}_n$ of the gate **604**, the length of each portion $\mathbf{604}_1$-$\mathbf{604}_n$ of the gate **604** crossing over the diffusion region (s) **600**; the reference mark of L is defined as the physical channel length of one of the portions $\mathbf{604}_1$-$\mathbf{604}_n$ of the gate **604**, the width of one of the portions $\mathbf{604}_1$-$\mathbf{604}_n$ of the gate **604** over the diffusion region(s) **600**. In this case, the physical channel width of the MOS transistor is the summation of the physical channel widths W_i-W_n of each portions $\mathbf{604}_1$-$\mathbf{604}_n$ of the gate **604**, and the physical channel length of the MOS transistor is the physical channel length L of one of the portions $\mathbf{604}_1$-$\mathbf{604}_n$ of the gate **604**.

[0811] Accordingly, the definition of the physical channel width and physical channel length of the MOS transistor as illustrated in FIG. **292** or **293** can be applicable to various features/structures described herein.

[0812] The size of the inter-chip buffer **702***a* shown in FIG. **276** can be characterized by a ratio of a physical channel width to a physical channel length of the NMOS transistor **752***a* or PMOS transistor **752***b*. As shown, the drains of the NMOS transistor **752***a* and the PMOS transistor **752***b* can be connected to the contact point P**2** of the circuits **700** through the metal interconnect line **740***d*. If the inter-chip buffer **702***a* is the two-stage cascade inter-chip driver shown in FIG. **278**, the size of the inter-chip buffer **702***a* can be characterized by the ratio of the physical channel width to the physical channel length of the NMOS transistor **752***a* or PMOS transistor **752***b* in the last stage driver **585***b*, and the drains of the NMOS transistor **752***a* and the PMOS transistor **752***b* are connected to the contact point P**2** of the circuits **700** through the metal interconnect **740***d*. The ratio of the physical channel width to the physical channel length of the NMOS transistor **752***a* can be, e.g., between 1 and 50, and in exemplary embodiments the ratio can be between 1 and 20. The ratio of the physical channel width to the physical channel length of the PMOS transistor **752***b* can be a suitable value, e.g., between 1 and 100, in exemplary embodiments the ratio can be between 1 and 40.

[0813] The size of the inter-chip buffer **703***a* shown in FIG. **276** can be characterized by a ratio of a physical channel width to a physical channel length of the NMOS transistor **753***a* or PMOS transistor **753***b*. As shown, the drains of the NMOS transistor **753***a* and the PMOS transistor **753***b* can be connected to the contact point P**3** of the circuits **800** through the metal interconnect **740***f*. If the inter-chip buffer **703***a* is the two-stage cascade inter-chip driver shown in FIG. **279**, the size of the inter-chip buffer **703***a* can be characterized by the ratio of the physical channel width to the physical channel length of the NMOS transistor **753***a* or PMOS transistor **753***b* in the last stage driver **586***b*, and the drains of the NMOS transistor **753***a* and the PMOS transistor **753***b* are connected to the contact point P**3** of the circuits **800** through the metal interconnect **740***f*. The ratio of the physical channel width to the physical channel length of the NMOS transistor **753***a* can be, e.g., between 1 and 50, and in exemplary embodiments, the ratio can be between 1 and 20. The ratio of the physical channel width to the physical channel length of the PMOS transistor **753***b* can be, e.g., between 1 and 100, and in exemplary embodiments, the ratio can be between 1 and 40.

[0814] The size of the off-chip buffer **61***b* shown in FIG. **276** can be characterized by a ratio of a physical channel width to a physical channel length of the NMOS transistor **4203** or PMOS transistor **4204**. As shown, the drains of the NMOS transistor **4203** and the PMOS transistor **4204** can be connected to the contact point P**6** of the circuits **700** through the metal interconnect **740***m*. If the off-chip buffer **61***b* is the two-stage cascade off-chip driver shown in FIG. **282**, the size of the off-chip buffer **61***b* can be characterized by the ratio of the physical channel width to the physical channel length of the NMOS transistor **4203** or PMOS transistor **4204** in the last stage driver **426***b*, and the drains of the NMOS transistor **4203** and the PMOS transistor **4204** are connected to the contact point P**6** of the circuits **700** through the metal interconnect **740***m*. The ratio of the physical channel width to the physical channel length of the NMOS transistor **4203** can be, e.g., larger than 30, such as between 30 and 20,000, and in exemplary embodiments the ratio can be larger than 50, such as between 50 and 300. The ratio of the physical channel width to the physical channel length of the PMOS transistor **4204** can be, e.g., larger than 60, such as between 60 and 40,000,

IPR2026-00067
TSMC EX1019 Page 357

and in exemplary embodiments the ratio can be larger than 100, such as between 100 and 600. For exemplary embodiments, the ratio of the physical channel width to the physical channel length of the NMOS transistor **4203** may be larger than the ratio of the physical channel width to the physical channel length of the NMOS transistor **752***a* by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times. Moreover, for exemplary embodiments, the ratio of the physical channel width to the physical channel length of the PMOS transistor **4204** may be larger than the ratio of the physical channel width to the physical channel length of the PMOS transistor **752***b* by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0815] The size of the off-chip buffer **61***c* shown in FIG. **276** can be characterized by a ratio of a physical channel width to a physical channel length of the NMOS transistor **4303** or PMOS transistor **4304**. As shown, the drains of the NMOS transistor **4303** and the PMOS transistor **4304** can be connected to the contact point P**7** of the circuits **800** through the metal interconnect **740***p*. If the off-chip buffer **61***c* is the two-stage cascade off-chip driver shown in FIG. **283**, the size of the off-chip buffer **61***c* can be characterized by the ratio of the physical channel width to the physical channel length of the NMOS transistor **4303** or PMOS transistor **4304** in the last stage driver **427***b*, and the drains of the NMOS transistor **4303** and the PMOS transistor **4304** are connected to the contact point P**7** of the circuits **800** through the metal interconnect **740***p*. The ratio of the physical channel width to the physical channel length of the NMOS transistor **4303** can be, e.g., larger than 30, such as between 30 and 20,000, and in exemplary embodiments the ratio can be larger than 50, such as between 50 and 300. The ratio of the physical channel width to the physical channel length of the PMOS transistor **4304** can be, e.g., larger than 60, such as between 60 and 40,000, and in exemplary embodiments the ratio can be larger than 100, such as between 100 and 600. The ratio of the physical channel width to the physical channel length of the NMOS transistor **4303** may be larger than the ratio of the physical channel width to the physical channel length of the NMOS transistor **753***a* by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times. The ratio of the physical channel width to the physical channel length of the PMOS transistor **4304** may be larger than the ratio of the physical channel width to the physical channel length of the PMOS transistor **753***b* by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0816] The size of the inter-chip buffer **701***a* or **702***a* shown in FIG. **285** can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor of the tri-state driver of the inter-chip tri-state buffer. As shown, the tri-state driver can be connected to the contact point P**1** or P**2** of the circuits **700** through the metal interconnect **740***b* or **740***d*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver can be, e.g., between 1 and 50, and in exemplary embodiments between 1 and 20. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver can be, e.g., between 1 and 100, and in exemplary embodiments between 1 and 40.

[0817] If the inter-chip buffer **701***a* or **702***a* shown in FIG. **285** is a multi-stage tri-state buffer, the size of the inter-chip buffer **701***a* or **702***a* can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor in the last stage tri-state driver of the multi-stage tri-state buffer. As shown, the last stage tri-state driver can be connected to the contact point P**1** or P**2** of the circuits **700** through the metal interconnect **740***b* or **740***d*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the last stage tri-state driver can be, for example, between 1 and 50, and in exemplary embodiments the ratio can be between 1 and 20. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the last stage tri-state driver can be between 1 and 100, and in exemplary embodiments the ratio can be between 1 and 40.

[0818] The size of the inter-chip buffer **703***a* or **704***a* shown in FIG. **285** can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor of the tri-state driver of the inter-chip tri-state buffer. As shown, the tri-state driver can be connected to the contact point P**3** or P**4** of the circuits **800** through the metal interconnect **740***f* or **740***h*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver is between 1 and 50, and in exemplary embodiments between 1 and 20. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver is between 1 and 100, and in exemplary embodiments can be between 1 and 40.

[0819] If the inter-chip buffer **703***a* or **704***a* shown in FIG. **285** is a multi-stage tri-state buffer, the size of the inter-chip buffer **703***a* or **704***a* can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor in the last stage tri-state driver of the multi-stage tri-state buffer. As shown, the last stage tri-state driver can be connected to the contact point P**3** or P**4** of the circuits **800** through the metal interconnect **740***f* or **740***h*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the last stage tri-state driver can be, e.g., between 1 and 50, and in exemplary embodiments can be between 1 and 20. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the last stage tri-state driver can be, e.g., between 1 and 100, and in exemplary embodiments can be between 1 and 40.

[0820] The size of the off-chip buffer **61***a* or **61***b* shown in FIG. **285** can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor of a tri-state driver of the off-chip tri-state buffer. As shown, the tri-state driver can be connected to the contact point P**5** or P**6** of the circuits **700** through the metal interconnect **740***j* or **740***m*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver can be, e.g., larger than 30, such as between 30 and 20,000, and in exemplary embodiments the ratio can be larger than 50, such as between 50 and 300. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver can be, e.g., larger than 60, such as between 60 and 40,000, and in exemplary embodiments can be larger than 100, such as between 100 and 600.

[0821] If the off-chip buffer **61***a* or **61***b* shown in FIG. **285** is a multi-stage tri-state buffer, the size of the off-chip buffer **61***a* or **61***b* can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor in the last stage tri-state driver of the multi-stage tri-state buffer. As shown, the last stage

tri-state driver can be connected to the contact point P5 or P6 of the circuits **700** through the metal interconnect **740***j* or **740***m*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the last stage tri-state driver can be, for example, larger than 30, such as between 30 and 20,000, and in exemplary embodiments the ratio can be larger than 50, such as between 50 and 300. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the last stage tri-state driver can be larger than 60, such as between 60 and 40,000, and in exemplary embodiments can be larger than 100, such as between 100 and 600.

[0822] The ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver (at the last stage) of the off-chip tri-state buffer **61***a* or **61***b* shown in FIG. **285** may be larger than the ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver (at the last stage) of the inter-chip tri-state buffer **701***a* or **702***a* shown in FIG. **285** by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver (at the last stage) of the off-chip tri-state buffer **61***a* or **61***b* shown in FIG. **285** may be larger than the ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver (at the last stage) of the inter-chip tri-state buffer **701***a* or **702***a* shown in FIG. **285** by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0823] The size of the off-chip buffer **61***c* or **61***d* shown in FIG. **285** can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor of a tri-state driver of the off-chip tri-state buffer. As shown, the tri-state driver can be connected to the contact point P7 or P8 of the circuits **800** through the metal interconnect **740***p* or **740***r*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver can be, e.g., larger than 30, such as between 30 and 20,000, and in exemplary embodiments can be larger than 50, such as between 50 and 300. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver can be, e.g., larger than 60, such as between 60 and 40,000, and in exemplary embodiments the ratio can be larger than 100, such as between 100 and 600.

[0824] If the off-chip buffer **61***c* or **61***d* shown in FIG. **285** is a multi-stage tri-state buffer, the size of the off-chip buffer **61***c* or **61***d* can be characterized by a ratio of a physical channel width to a physical channel length of an NMOS transistor or PMOS transistor in the last stage tri-state driver of the multi-stage tri-state buffer. As shown, the last stage tri-state driver can be connected to the contact point P7 or P8 of the circuits **800** through the metal interconnect **740***p* or **740***r*. The ratio of the physical channel width to the physical channel length of the NMOS transistor of the last stage tri-state driver can be, e.g., larger than 30, such as between 30 and 20,000, and in exemplary embodiments the ratio can be larger than 50, such as between 50 and 300. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the last stage tri-state driver can be, e.g., larger than 60, such as between 60 and 40,000, and in exemplary embodiments can be larger than 100, such as between 100 and 600.

[0825] The ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver (at the last stage) of the off-chip tri-state buffer **61***c* or **61***d* shown in FIG. **285** may be larger than the ratio of the physical channel width to the physical channel length of the NMOS transistor of the tri-state driver (at the last stage) of the inter-chip tri-state buffer **703***a* or **704***a* shown in FIG. **285** by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times. The ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver (at the last stage) of the off-chip tri-state buffer **61***c* or **61***d* shown in FIG. **285** may be larger than the ratio of the physical channel width to the physical channel length of the PMOS transistor of the tri-state driver (at the last stage) of the inter-chip tri-state buffer **703***a* or **704***a* shown in FIG. **285** by, e.g., more than 3 times, 10 times, 25 times or 50 times, such as between 3 and 100 times.

[0826] Referring to FIG. **294**, alternatively, the internal circuit **200***c* of the circuits **700** can be connected to the second node SN5 of the off-chip buffer **61***a* through the metal interconnect **740***a* of the circuits **700** without passing through any inter-chip circuit and any testing interface circuit of the circuits **700**. The internal circuit **200***g* of the circuits **800** can be connected to the first node FN7 of the off-chip buffer **61***c* through the metal interconnect **740***e* of the circuits **800** without passing through any inter-chip circuit and any testing interface circuit of the circuits **800**. Comparing to the circuit diagram of FIG. **276**, the inter-chip circuits **200***a* and **200***e* and the testing interface circuits **333***a* and **333***c* can be omitted. The element in FIG. **294** indicated by a same reference number as indicates the element in FIG. **276** has a same material and spec as the element illustrated in FIG. **276**.

[0827] Referring to FIG. **295**, alternatively, the internal circuit **200***c* of the circuits **700** can be connected to the second node SN5 of the off-chip buffer **61***a* through the metal interconnect **740***a* of the circuits **700** without passing through any inter-chip circuit and any testing interface circuit of the circuits **700**. The internal circuit **200***g* of the circuits **800** can be connected to the first node FN7 of the off-chip buffer **61***c* through the metal interconnect **740***e* of the circuits **800** without passing through any inter-chip circuit and any testing interface circuit of the circuits **800**. Comparing to the circuit diagram of FIG. **285**, the inter-chip circuits **200***a* and **200***e* and the testing interface circuits **333***a* and **333***c* can be omitted. The element in FIG. **295** indicated by a same reference number as indicates the element in FIGS. **276** and **285** has a same material and spec as the element illustrated in FIGS. **276** and **285**.

[0828] FIG. **296** is an example of a schematic top perspective view showing the arrangement of the chips **68**, the dummy substrate **62**, the metal plugs **5***p* (including the metal plugs **5***a*-**5***f*) and the metal interconnects **1** (including the metal interconnects **1***a* and **1***b*) of the previously described system-in package or multichip module **555**, **555***b*, **555***c*, **555***e*, **555***g*, **555***h*, **555***s*, **555***u*, **555***v*, **555***w*, **555***y*, **555***z*, **556***a*, **556***c*, **556***d*, **556***e*, **556***g*, or **556***h* that is shown with a cross sectional view cut along the line Q-Q in FIG. **296**. Referring to FIG. **296**, the chips **68** are placed in the openings **62***a* that are formed in the dummy substrate **62**, and the encapsulation/gap filling material **64** is formed in the gaps **4** each having the transverse distance or spacing D1 and in the gaps **8** each having the transverse distance or spacing D2. Hollow circles enclosing no oblique lines indicate the metal plugs **5***p*, like the previously described metal plug **5***a*, formed in and through

the dummy substrate **62** and connected to the overlying metal interconnects **1**, like the previously described metal interconnect **1***a*, contacting the underlying contact points of the conductive layer **18** of the carrier **11**. Circles enclosing triangles indicate the metal plugs **5***p*, like the previously described metal plug **5***b*, formed in and through the chips **68** and connected to the overlying metal interconnects **1**, like the previously described metal interconnect **1***a*, contacting the underlying contact points of the conductive layer **18** of the carrier **11**. Circles enclosing oblique lines indicate the metal plugs **5***p*, like the previously described metal plug **5***c*, **5***d* or **5***f*, formed in the chips **68** and connected to the overlying metal interconnects **1**, like the previously described metal interconnect **1***a* or **1***b*, contacting the underlying interconnects or metal traces, like the previously described interconnect or metal trace **35***d*, **35***c* or **35***b*, in the chips **68**. Circles enclosing cross lines indicate the metal plugs **5***p*, like the previously described metal plug **5***e*, formed in and through the chips **68** and connected to the overlying metal interconnects **1**, like the previously described metal interconnect **1***b*, connecting the interconnects or metal traces, like the previously described interconnect or metal trace **35***a*, on the supporters, like the previously described supporter **801**, in the chips **68** down to the underlying contact points of the conductive layer **18** of the carrier **11**.

[0829] FIG. **297** is an example of a schematic top perspective view showing the arrangement of the chips **72**, the dummy substrate **165**, the metal plugs **6***p* (including the metal plugs **6***a*-**6***e*) and the metal interconnects **2** (including the metal interconnects **2***a* and **2***b*) of the previously described system-in package or multichip module **555**, **555***b*, **555***c*, **555***e*, **555***g*, **555***h*, **555***j*, **555***m*, **555***n*, **555***o*, **555***q*, **555***r*, **555***s*, **555***u*, **555***v*, **555***w*, **555***y*, **555***z*, **556***a*, **556***c*, **556***d*, **556***e*, **556***g*, or **556***h* that is shown with a cross sectional view cut along the line Q-Q in FIG. **297**. Referring to FIG. **297**, the chips **72** are placed in the openings **165***a* that are formed in the dummy substrate **165**, and the encapsulation/gap filling material **98** is formed in the gaps **4***a* each having the transverse distance or spacing D**4** and in the gaps **8***a* each having the transverse distance or spacing D**5**. Hollow circles enclosing no oblique lines indicate the metal plugs **6***p*, like the previously described metal plug **6***a*, formed in and through the dummy substrate **165** and connected to the overlying metal interconnects **2**, contacting the underlying metal interconnects **1**, like the previously described metal interconnect **1***b*. Circles enclosing triangles indicate the metal plugs **6***p*, like the previously described metal plug **6***b*, formed in and through the chips **72** and connected to the overlying metal interconnects **2**, like the previously described metal interconnect **2***a*, contacting the underlying metal interconnects **1**, like the previously described metal interconnect **1***a*. Circles enclosing oblique lines indicate the metal plugs **6***p*, like the previously described metal plug **6***c* or **6***d*, formed in the chips **72** and connected to the overlying metal interconnects **2**, like the previously described metal interconnect **2***a*, contacting the underlying interconnects or metal traces, like the previously described interconnect or metal trace **55***c* or **55***b*, in the chips **72**. Circles enclosing cross lines indicate the metal plugs **6***p*, like the previously described metal plug **6***e*, formed in and through the chips **72** and connected to the overlying metal interconnects **2**, like the previously described metal interconnect **2***b*, connecting the interconnects or metal traces, like the previously described interconnect or metal trace **55***a*, on the supporters, like the previously described supporter **802**, in the chips **72** down to the underlying metal interconnects **1**, like the previously described metal interconnect **1***b*.

[0830] FIG. **298** is an example of a schematic top perspective view showing the arrangement of the chips **118**, the dummy substrate **165**, the metal plugs **7***p* (including the metal plugs **7***a*-**7***f*) and the metal interconnects **3** (including the metal interconnects **3***a*, **3***b* and **3***c*) of the previously described system-in package or multichip module **555**, **555***b*, **555***c*, **555***e*, **555***g*, **555***h*, **555***j*, **555***m*, **555***n*, **555***o*, **555***q*, **555***r*, **555***s*, **555***u*, **555***v*, **555***w*, **555***y*, **555***z*, **556***a*, **556***c*, **556***d*, **556***e*, **556***g*, or **556***h* that is shown with a cross sectional view cut along the line Q-Q in FIG. **298**. Referring to FIG. **298**, the chips **118** are placed in the openings **158***a* that are formed in the dummy substrate **158**, and the encapsulation/gap filling material **138** is formed in the gaps **4***b* each having the transverse distance or spacing D**7** and in the gaps **8***b* each having the transverse distance or spacing D**8**. Hollow circles enclosing no oblique lines indicate the metal plugs **7***p*, like the previously described metal plug **7***a*, formed in and through the dummy substrate **158** and connected to the overlying metal interconnects **3**, like the previously described metal interconnect **3***c*, contacting the underlying metal interconnects **2**. Circles enclosing triangles indicate the metal plugs **7***p*, like the previously described metal plug **7***b*, formed in and through the chips **118** and connected to the overlying metal interconnects **3**, like the previously described metal interconnect **3***a*, contacting the underlying metal interconnects **2**, like the previously described metal interconnect **2***a*. Circles enclosing oblique lines indicate the metal plugs **7***p*, like the previously described metal plug **7***c*, **7***d* or **7***f*, formed in the chips **118** and connected to the overlying metal interconnects **3**, like the previously described metal interconnect **3***a* or **3***b*, contacting the underlying interconnects or metal traces, like the previously described interconnect or metal trace **75***d*, **75***c* or **75***b*, in the chips **118**. Circles enclosing cross lines indicate the metal plugs **7***p*, like the previously described metal plug **7***e*, formed in and through the chips **118** and connected to the overlying metal interconnects **3**, like the previously described metal interconnect **3***c*, connecting the interconnects or metal traces, like the previously described interconnect or metal trace **75***a*, on the supporters, like the previously described supporter **803**, in the chips **118** down to the underlying metal interconnects **2**, like the previously described metal interconnect **2***b*.

[0831] The system-in package or multichip module shown in FIG. **82**, **84**, **103**, **105**, **128**, **130**, **136**, **138**, **181**, **183**, **207**, **209**, **250**, **252**, **270** or **272**, or the multichip package shown in FIG. **83**, **85**, **88**, **104**, **106**, **109**, **129**, **131**, **132**, **137**, **139**, **140**, **182**, **184**, **185**, **208**, **210**, **211**, **251**, **253**, **254**, **271**, **273** or **274** can be used in a wide variety of electronic devices, including, but not limited to, e.g., a telephone, a cordless phone, a mobile phone, a smart phone, a netbook computer, a notebook computer, a digital camera, a digital video camera, a digital picture frame, a personal digital assistant (PDA), a pocket personal computer, a portable personal computer, an electronic book, a digital book, a desktop computer, a tablet or slate computer, an automobile electronic product, a mobile internet device (MID), a mobile television, a projector, a mobile projector, a pico projector, a smart projector, a three-dimensional (3D) video display, a 3D television (3D TV), a 3D video game player, a mobile computer device, a mobile compuphone (also called mobile phoneputer or mobile personal computer phone) which is a device or a system combining and provid-

ing functions of computers and phones, or a high performance and/or low power computer or server, for example, used for cloud computing.

[0832] The components, steps, features, benefits and advantages that have been discussed are merely illustrative. None of them, nor the discussions relating to them, are intended to limit the scope of protection in any way. Numerous other embodiments are also contemplated. These include embodiments that have fewer, additional, and/or different components, steps, features, benefits and advantages. These also include embodiments in which the components and/or steps are arranged and/or ordered differently.

[0833] In reading the present disclosure, one skilled in the art will appreciate that embodiments of the present disclosure, e.g., design of structure and/or control of methods described herein, can be implemented in hardware, software, firmware, or any combinations of such, and over one or more networks. Suitable software can include computer-readable or machine-readable instructions for performing methods and techniques (and portions thereof) of designing and/or controlling the implementation of tailored RF pulse trains. Any suitable software language (machine-dependent or machine-independent) may be utilized. Moreover, embodiments of the present disclosure can be included in or carried by various signals, e.g., as transmitted over a wireless RF or IR communications link or downloaded from the Internet.

[0834] Unless otherwise stated, all measurements, values, ratings, positions, magnitudes, sizes, and other specifications that are set forth in this specification, including in the claims that follow, are approximate, not exact. They are intended to have a reasonable range that is consistent with the functions to which they relate and with what is customary in the art to which they pertain. Furthermore, unless stated otherwise, the numerical ranges provided are intended to be inclusive of the stated lower and upper values. Moreover, unless stated otherwise, all material selections and numerical values are representative of preferred embodiments and other ranges and/or materials may be used.

[0835] The scope of protection is limited solely by the claims, and such scope is intended and should be interpreted to be as broad as is consistent with the ordinary meaning of the language that is used in the claims when interpreted in light of this specification and the prosecution history that follows, and to encompass all structural and functional equivalents thereof.

What is claimed is:

1. A system-in package comprising:

a carrier;

a first chip over said carrier, wherein said first chip comprises a first semiconductor substrate having a thickness between 1 and 50 micrometers, a first metal layer under a bottom surface of said first semiconductor substrate, and a dielectric layer under said bottom surface of said first semiconductor substrate and over said first metal layer;

a second chip over said carrier, wherein said second chip comprises a second semiconductor substrate, wherein said second semiconductor substrate has a top surface substantially coplanar with a top surface of said first semiconductor substrate, wherein said second chip is separated from said first chip;

a gap filling material disposed in a gap between said first chip and said second chip;

a first metal plug in said first chip, wherein said first metal plug passes through said first semiconductor substrate and said dielectric layer and contacts said first metal layer;

a first insulating material enclosing said first metal plug, wherein said first insulating material is enclosed by said first semiconductor substrate;

a first dielectric structure on said top surface of said first semiconductor substrate, on said top surface of said second semiconductor substrate, and on said gap filling material;

a first metal interconnect in said first dielectric structure and over said first chip, wherein said first metal interconnect is connected to said first metal plug;

a third chip over said first dielectric structure and over said first metal interconnect, wherein said third chip comprises a third semiconductor substrate having a thickness between 1 and 50 micrometers;

a second metal plug in said third chip, wherein said second metal plug passes through said third chip and contacts said first metal interconnect;

a second insulating material enclosing said second metal plug, wherein said second insulating material is enclosed by said third semiconductor substrate;

a second dielectric structure on a top surface of said third semiconductor substrate; and

a second metal interconnect in said second dielectric structure and over said third chip, wherein said second metal interconnect is connected to said second metal plug.

2. The system-in package of claim **1**, wherein said carrier comprises one of a silicon substrate, a glass substrate, a ceramic substrate, a metal substrate, and an organic polymer substrate.

3. The system-in package of claim **1**, wherein said first chip comprises one of a central-processing-unit (CPU) chip, a graphics-processing-unit (GPU) chip, a digital-signal-processing (DSP) chip, a flash memory chip, a dynamic-random-access-memory (DRAM) chip, a static-random-access-memory (SRAM) chip, a wireless local area network (WLAN) chip, a baseband chip, a logic chip, an analog chip, a power device, a regulator, a power management device, a global-positioning-system (GPS) chip, a Bluetooth chip, and a system-on chip (SOC) comprising one or more of a central-processing-unit (CPU) circuit block, a graphics-processing-unit (GPU) circuit block, a digital-signal-processing (DSP) circuit block, a memory circuit block, a baseband circuit block, a Bluetooth circuit block, a global-positioning-system (GPS) circuit block, a wireless local area network (WLAN) circuit block and a modem circuit block.

4. The system-in package of claim **1**, wherein said thickness of said first semiconductor substrate is between 2 and 20 micrometers.

5. The system-in package of claim **1**, wherein said second metal plug further contacts a second metal layer of said third chip, wherein said second metal layer is under said third semiconductor substrate.

6. The system-in package of claim **1** further comprising a third metal plug in said second chip, wherein said third metal plug passes through said second semiconductor substrate and contacts a second metal layer of said second chip, wherein said second metal layer is under a bottom surface of said second semiconductor substrate, wherein said first metal interconnect is further over said second chip and connected to said third metal plug.

7. The system-in package of claim **1**, wherein said first metal plug passes through said first chip and contacts a contact point of said carrier.

8. The system-in package of claim **1** further comprising a third metal plug in said first chip, a fourth metal plug in said second chip, and a third metal interconnect in said first dielectric structure and over said first and second chips, wherein said third metal plug passes through said first semiconductor substrate and contacts a second metal layer of said first chip, wherein said second metal layer is under said bottom surface of said first semiconductor substrate, wherein said fourth metal plug passes through said second semiconductor substrate and contacts a third metal layer of said second chip, wherein said third metal layer is under a bottom surface of said second semiconductor substrate, wherein said third metal interconnect connects said third metal plug and said fourth metal plug.

9. The system-in package of claim **1**, wherein said first chip has a different circuit design from a circuit design of said second chip.

10. The system-in package of claim **1** further comprising a dummy substrate over said carrier and in said gap, wherein said dummy substrate has a top surface substantially coplanar with said top surface of said first semiconductor substrate, wherein said first dielectric structure is further on said top surface of said dummy substrate.

11. The system-in package of claim **1** further comprising a metal bump connected to said second metal interconnect, wherein said metal bump comprises one of tin, copper, nickel, and gold.

12. The system-in package of claim **1**, wherein said first metal interconnect comprises one of a signal trace, a power trace, and a ground trace.

13. The system-in package of claim **1**, wherein said first insulating material comprises a sidewall dielectric layer on a sidewall of said first metal plug and on a top surface of said first metal layer, wherein said first metal plug is enclosed by said sidewall dielectric layer.

14. The system-in package of claim **1**, wherein said second insulating material comprises an insulating ring in said third semiconductor substrate, wherein said second metal plug passes through and is enclosed by said insulating ring.

15. The system-in package of claim **1**, wherein said second metal plug comprises an electroplated copper and a titanium-containing or tantalum-containing layer enclosing said electroplated copper.

16. The system-in package of claim **1**, wherein said first metal interconnect comprises an electroplated copper layer and a titanium-containing or tantalum-containing layer at multiple sidewalls and a bottom of said electroplated copper layer, wherein said electroplated copper layer is in said first dielectric structure and over said first chip.

17. The system-in package of claim **1**, wherein said first metal interconnect comprises an electroplated copper layer and a titanium-containing or tantalum-containing layer at a bottom of said electroplated copper layer but not at any sidewall of said electroplated copper layer, wherein said electroplated copper layer is in said first dielectric structure and over said first chip.

18. The system-in package of claim **1** further comprising a third metal plug in said third chip, wherein said third metal plug passes through said third semiconductor substrate and contacts a second metal layer of said third chip, wherein said second metal layer is under a bottom surface of said third semiconductor substrate, wherein said second metal interconnect is further connected to said third metal plug.

19. The system-in package of claim **18**, wherein a total number of bit lines in parallel data communication between said first and third chips is more than 128, and one of said bit lines is provided by said first, second and third metal plugs and said first and second metal interconnects.

20. The system-in package of claim **1**, wherein said first metal interconnect has a top surface substantially coplanar with a top surface of said first dielectric structure.

* * * * *