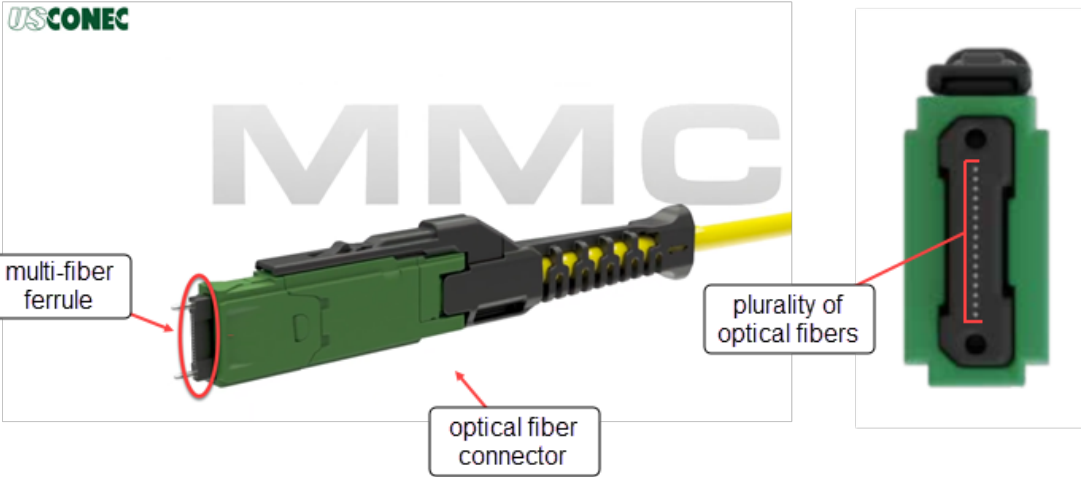
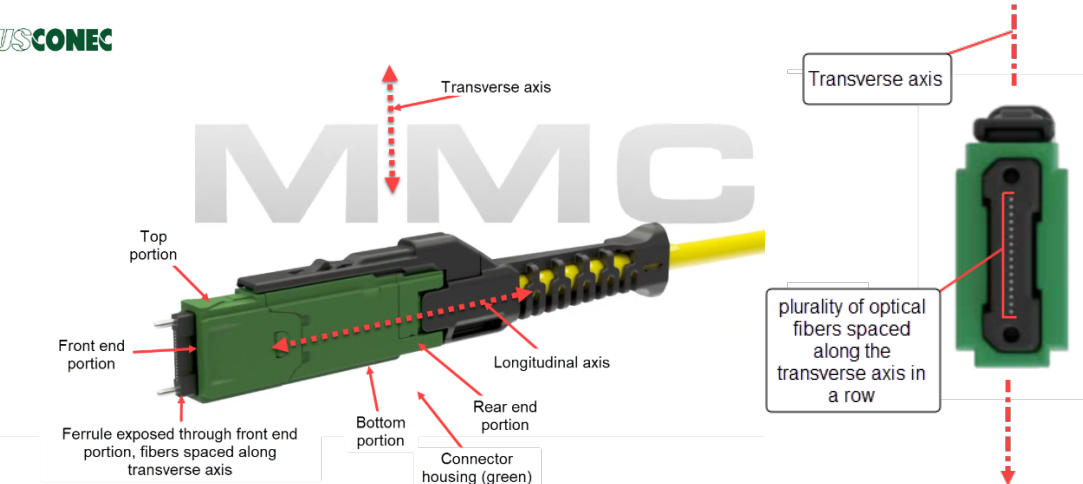
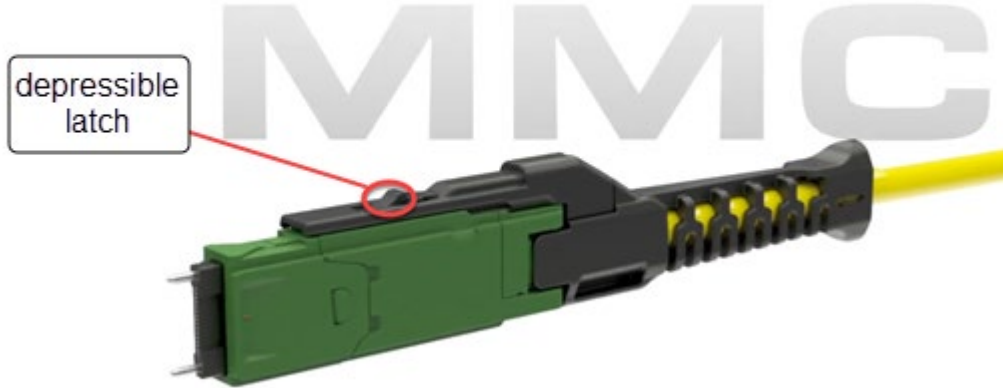
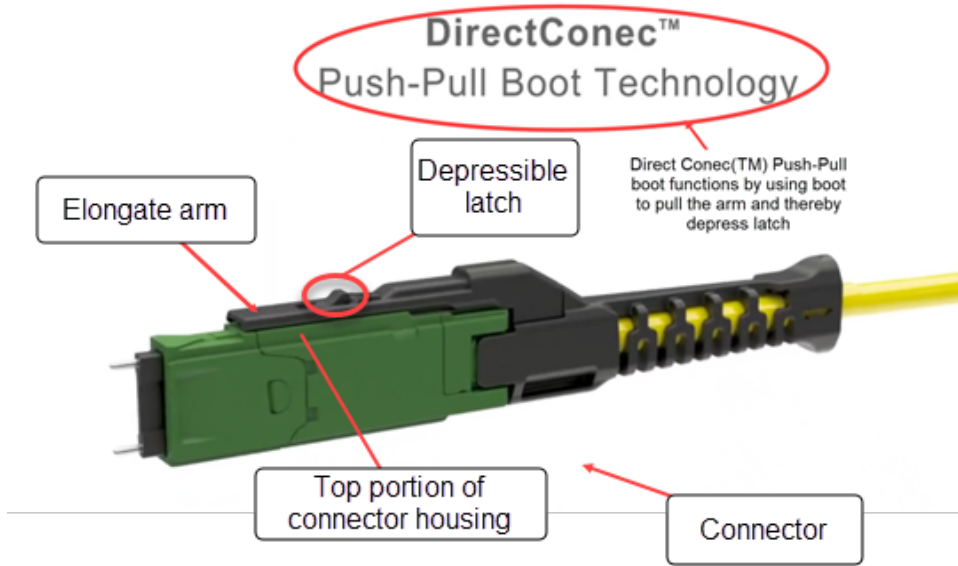


EXHIBIT I


U.S. Patent No. 11,307,369	MMC
23. An optical fiber connector comprising:	
multi-fiber ferrule configured to terminate a plurality of optical fibers;	 The diagram shows a perspective view of a green optical fiber connector with a yellow fiber cable. A red circle highlights the front end, labeled 'multi-fiber ferrule'. A red line points to the fiber cable, labeled 'optical fiber connector'. To the right, a cross-sectional view shows a vertical row of fibers, labeled 'plurality of optical fibers'.
a connector housing having a front end portion and a rear end portion spaced apart along a longitudinal axis, the connector housing comprising a top portion and a bottom portion spaced apart along a transverse axis perpendicular to the longitudinal axis, the connector housing being configured to hold the multi-fiber ferrule such that the multi-fiber ferrule is exposed through the front end portion for making an optical connection and the plurality of optical fibers are spaced apart from one another in a row extending parallel to the transverse axis,	 This diagram provides a more detailed view of the connector. It includes labels for 'Top portion', 'Front end portion', 'Bottom portion', 'Rear end portion', and 'Connector housing (green)'. A red dashed line indicates the 'Longitudinal axis' running through the center. Another red dashed line indicates the 'Transverse axis' perpendicular to the longitudinal axis. A label points to the 'Ferrule exposed through front end portion, fibers spaced along transverse axis'. To the right, a cross-sectional view shows the 'plurality of optical fibers spaced along the transverse axis in a row', with a red dashed line indicating the 'Transverse axis'.

U.S. Patent No. 11,307,369	MMC
a depressible latch above the top portion of the connector housing; and	 The diagram shows a green connector housing with a black latch mechanism. A red circle highlights the latch, with a label 'depressible latch' pointing to it. The background features a large, faint 'MMC' watermark and the 'USCONEC' logo in the top left corner.
an elongate arm connected to the connector housing above the top portion and configured to be pulled to actuate the depressible latch;	 This diagram provides a detailed view of the connector assembly. It includes the following labels and callouts: DirectConec™ Push-Pull Boot Technology: A red oval highlights this text at the top. Direct Conec(TM) Push-Pull boot functions by using boot to pull the arm and thereby depress latch: A red line points from this text to the boot mechanism. Elongate arm: A label pointing to the black arm extending from the housing. Depressible latch: A label pointing to the latch mechanism on the arm. Top portion of connector housing: A label pointing to the green housing. Connector: A label pointing to the yellow cable connector at the end. The 'USCONEC' logo is also present in the top left corner.

wherein the connector housing comprises a guide connecting the elongate arm to the optical fiber connector.

USCONEC

MMC

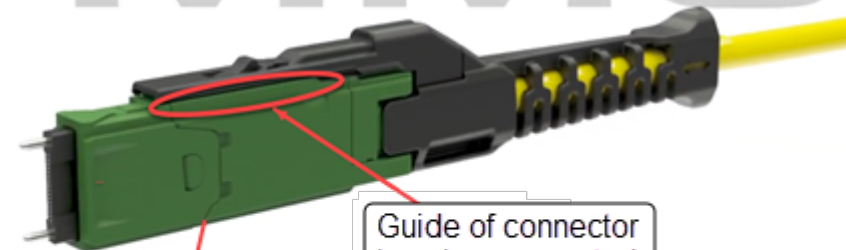

Connector housing

Guide of connector
housing connected
to arm