



US007263716B1

(12) **United States Patent**
Gulick

(10) **Patent No.:** **US 7,263,716 B1**

(45) **Date of Patent:** **Aug. 28, 2007**

(54) **REMOTE MANAGEMENT MECHANISM TO PREVENT ILLEGAL SYSTEM COMMANDS**

(75) Inventor: **Dale E. Gulick**, Austin, TX (US)

(73) Assignee: **Advanced Micro Devices, Inc.**, Austin, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1006 days.

(21) Appl. No.: **10/066,948**

(22) Filed: **Feb. 4, 2002**

Related U.S. Application Data

(63) Continuation-in-part of application No. 10/033,142, filed on Nov. 1, 2001, and a continuation-in-part of application No. 10/005,648, filed on Dec. 3, 2001.

(51) **Int. Cl.**
H04L 9/32 (2006.01)
G06F 9/00 (2006.01)

(52) **U.S. Cl.** **726/3; 713/2; 713/151**

(58) **Field of Classification Search** **713/200; 714/55**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,675,800 A * 10/1997 Fisher et al. 713/2

5,978,912 A * 11/1999 Rakavy et al. 713/2
6,223,284 B1 * 4/2001 Novoa et al. 713/100
6,263,431 B1 * 7/2001 Lovelace et al. 713/2
6,282,642 B1 * 8/2001 Cromer et al. 713/2
6,438,711 B2 * 8/2002 Woodruff 714/27
6,618,810 B1 * 9/2003 Dirie 713/201
2003/0037231 A1 * 2/2003 Goodman et al. 713/2
2004/0117609 A1 * 6/2004 Stalker et al. 713/2
2005/0071619 A1 * 3/2005 Chu et al. 713/2
2005/0149924 A1 * 7/2005 Komarla et al. 717/176

* cited by examiner

Primary Examiner—Kambiz Zand


Assistant Examiner—Thomas M. Szymanski

(74) *Attorney, Agent, or Firm*—Williams, Morgan & Amerson, P.C.

(57) **ABSTRACT**

An integrated circuit, a computer system, and a method for authorizing RMCP requests. The method includes receiving a request for a system action and initiating a timer. The method also includes generating an authorization request for the system action and evaluating a result of the authorization request for the system action if received before an expiration of the timer. The method also includes granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

28 Claims, 15 Drawing Sheets

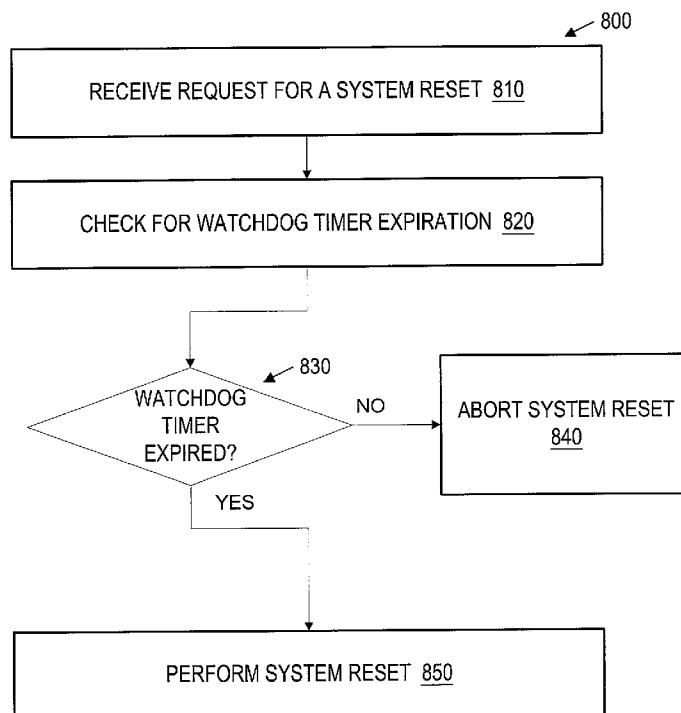

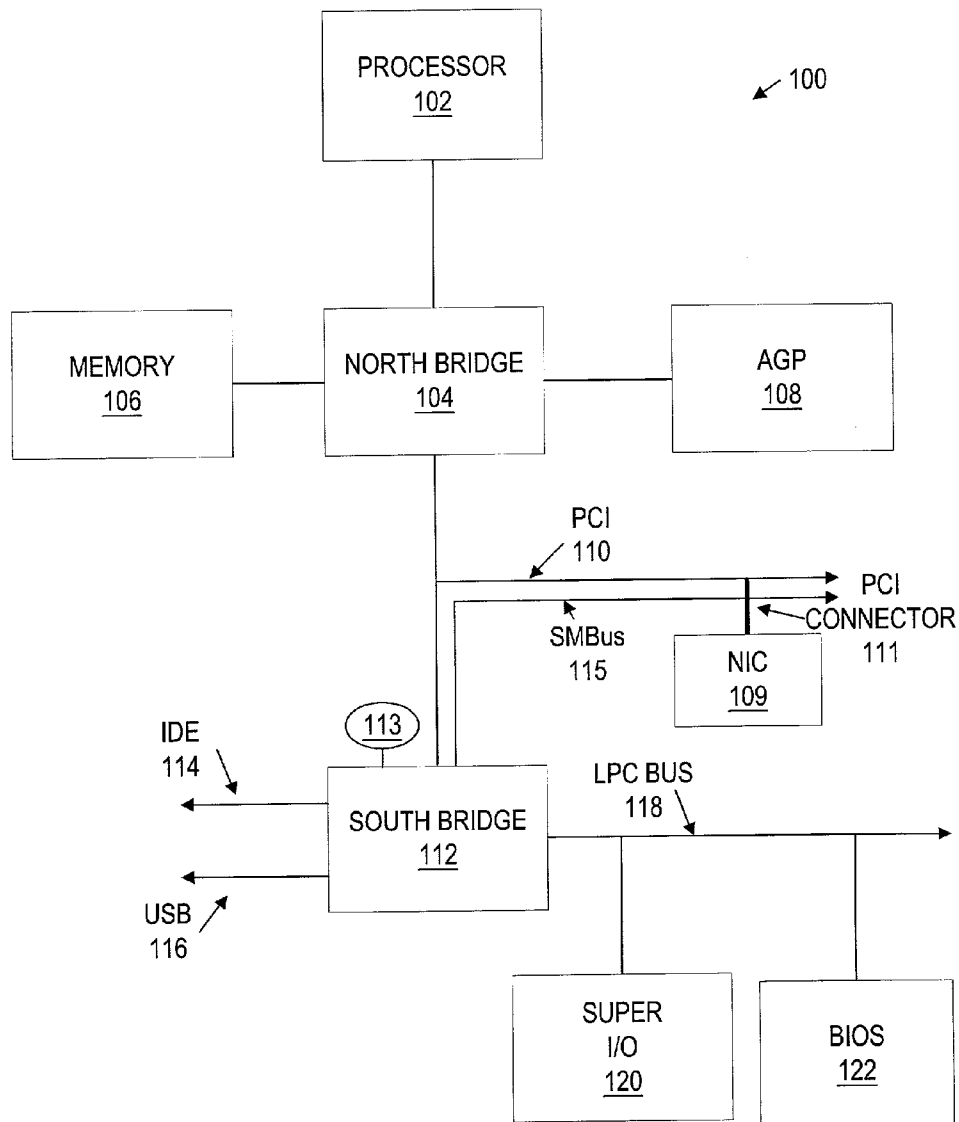


Fig. 1A
(Prior Art)

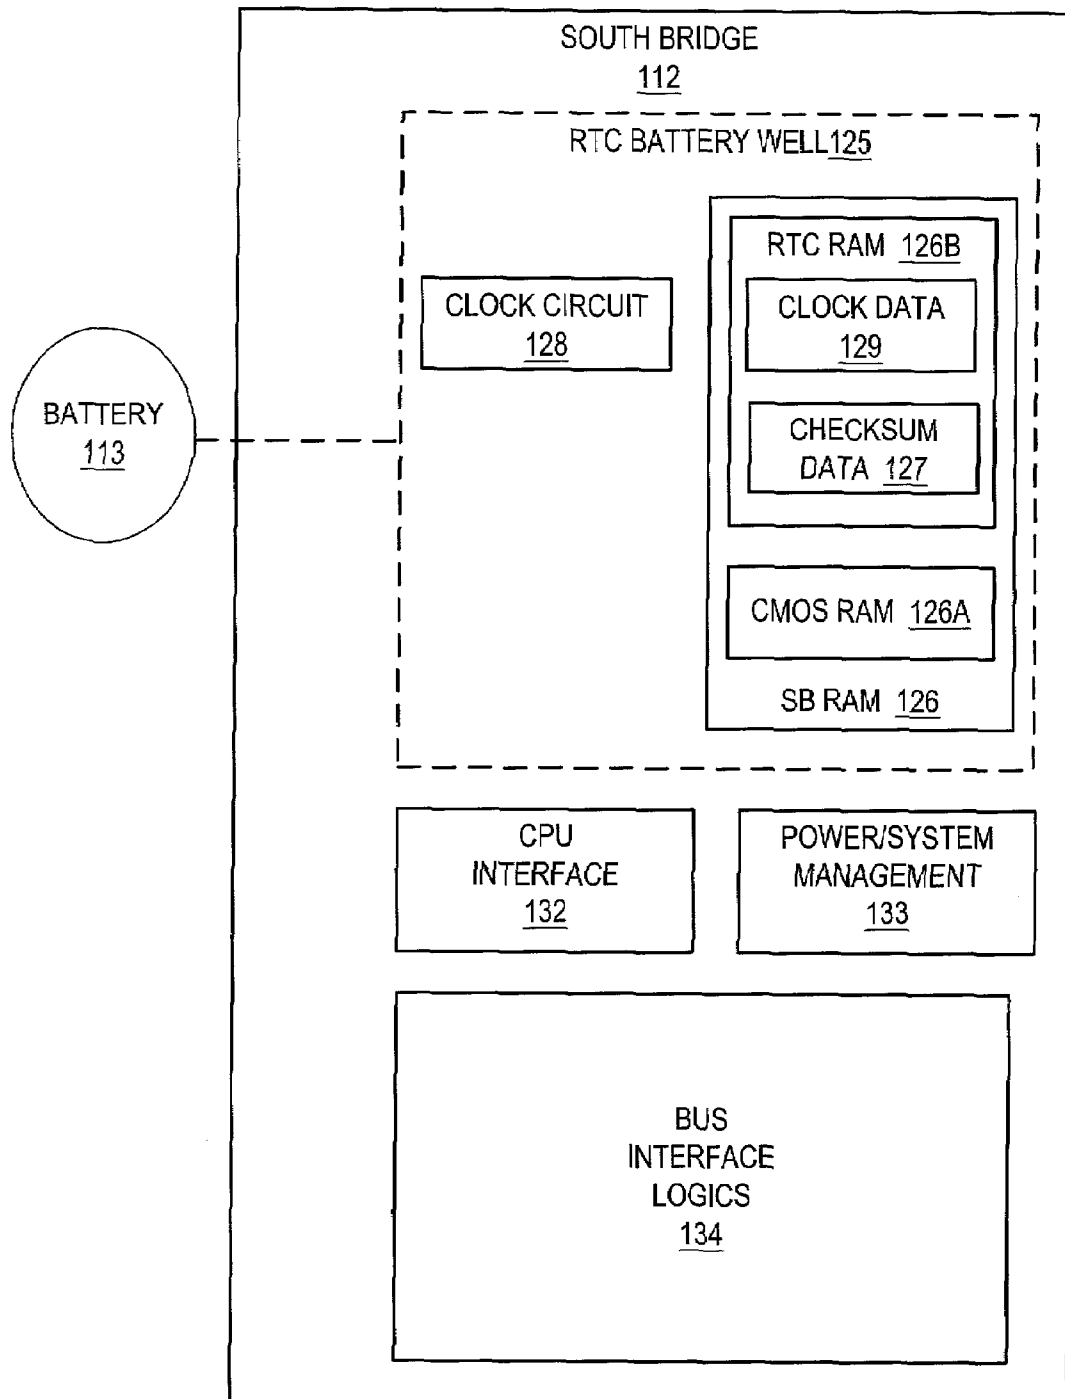


Fig. 1B
(Prior Art)

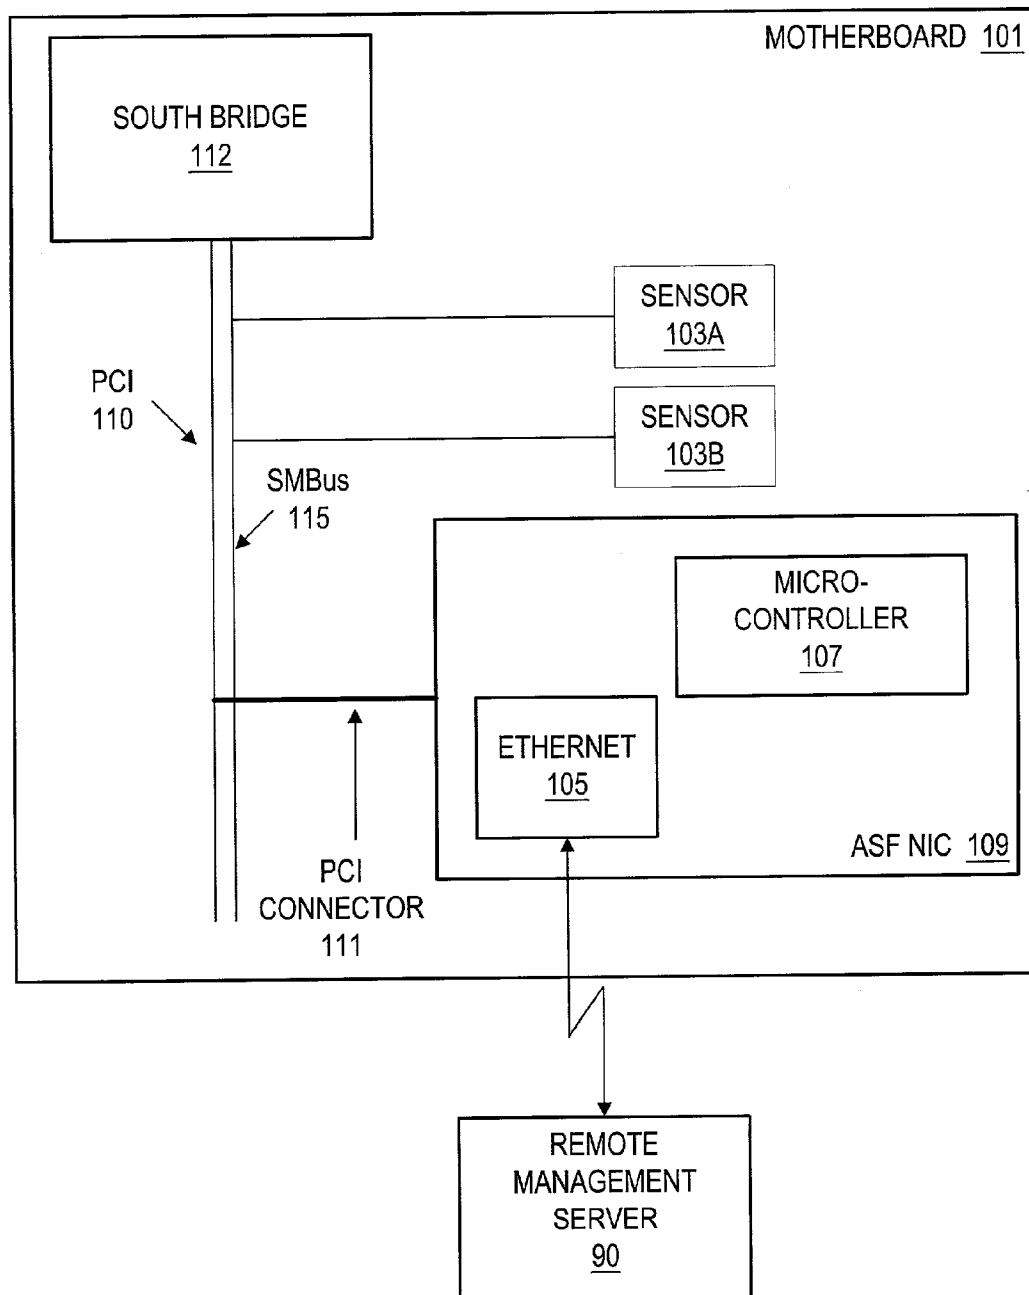


Fig. 1C
(Prior Art)





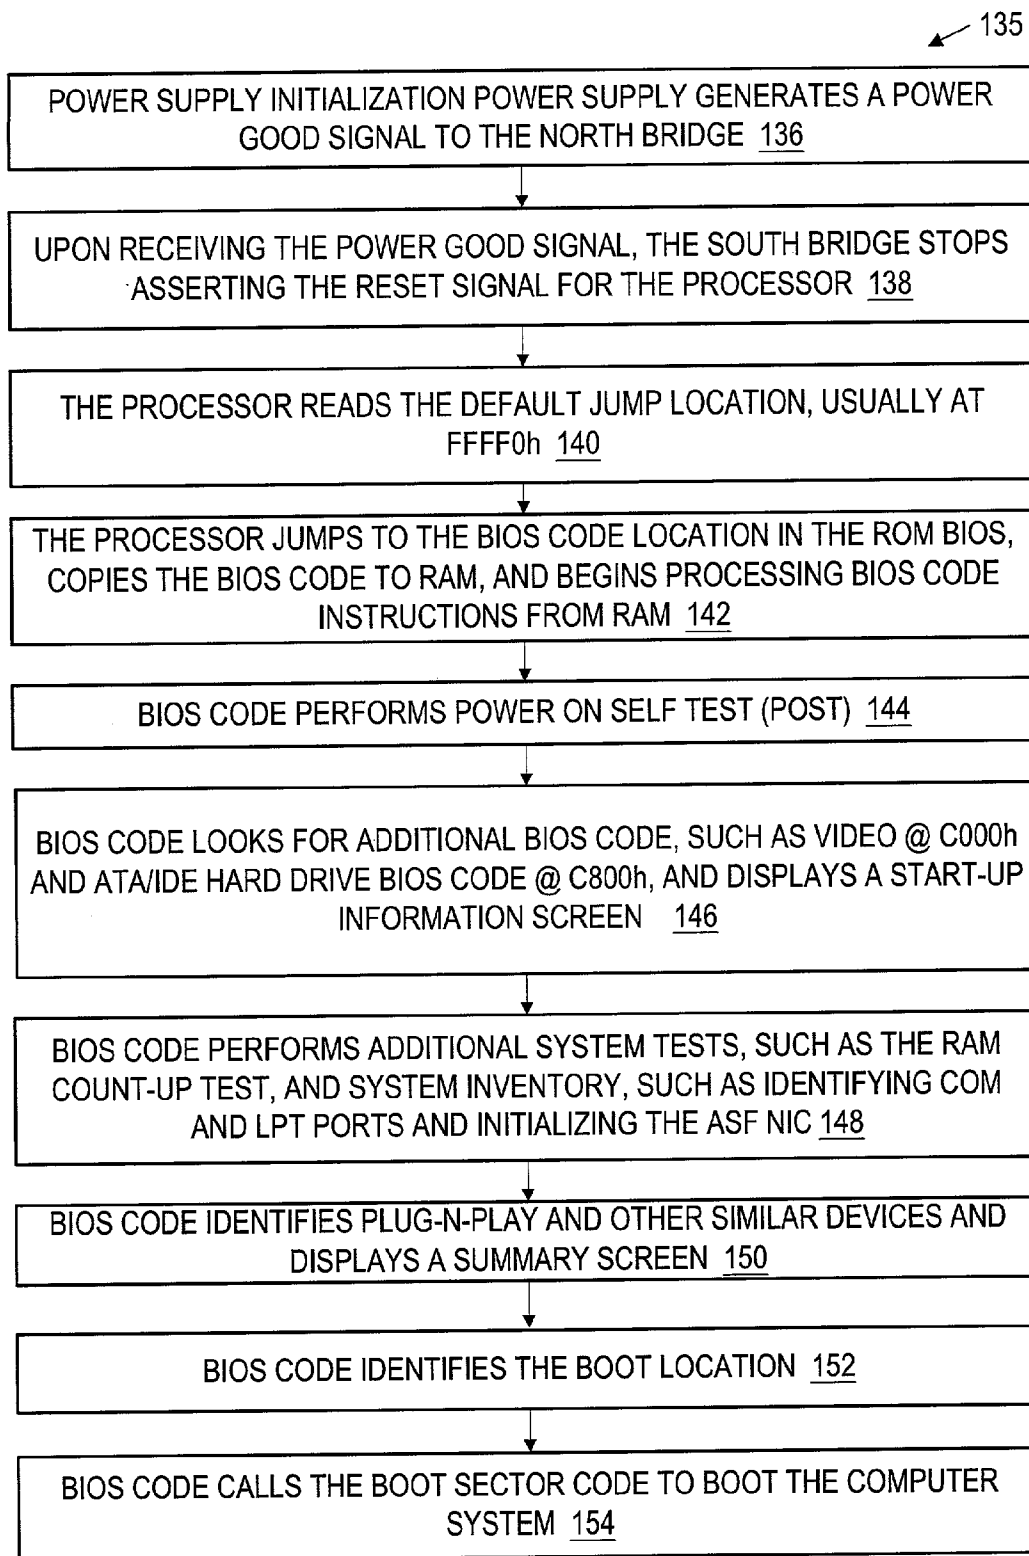



Fig. 2
(Prior Art)

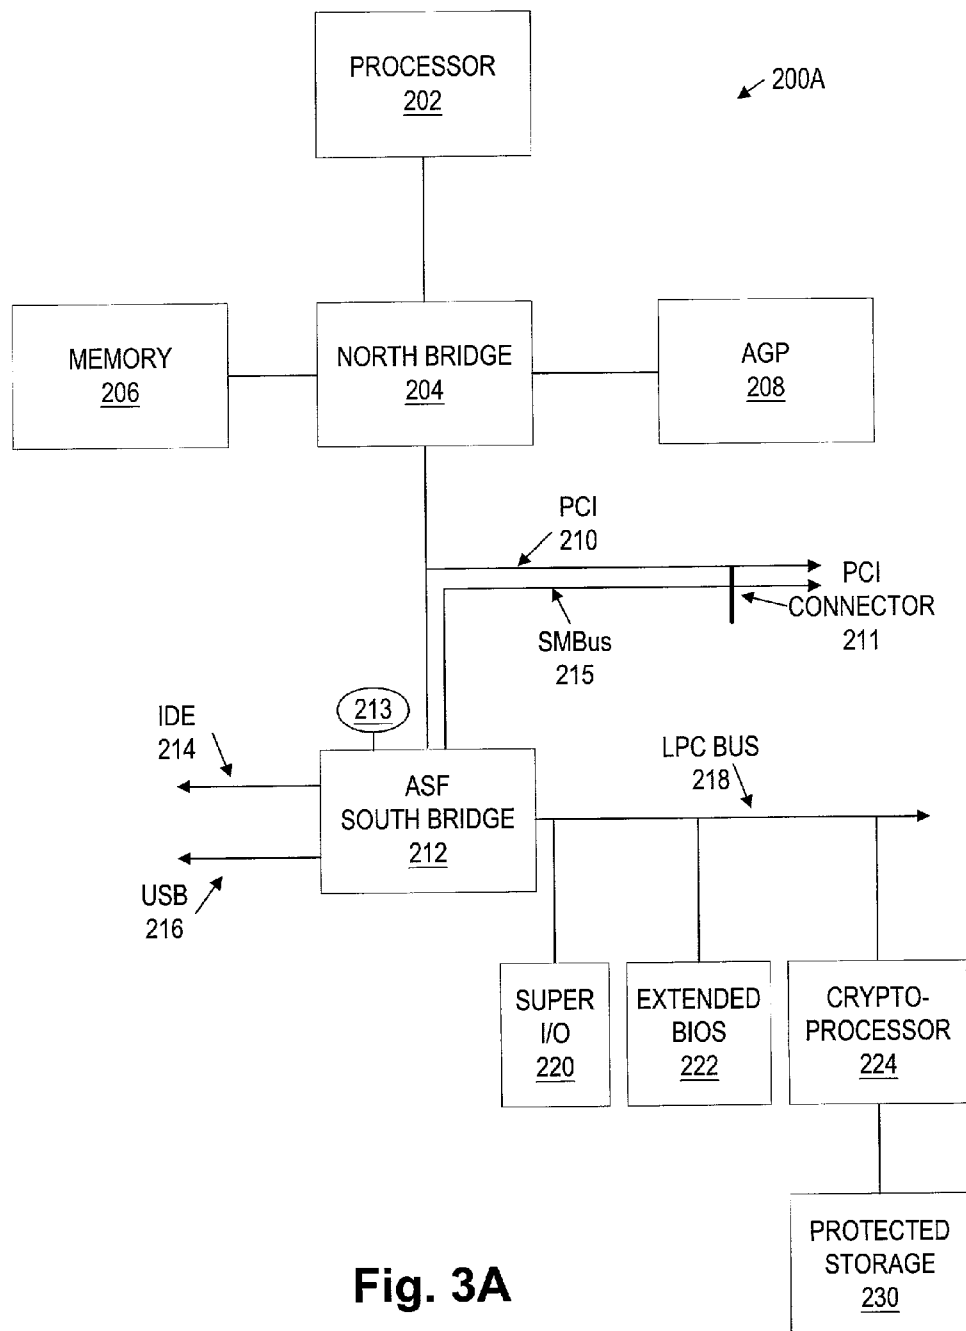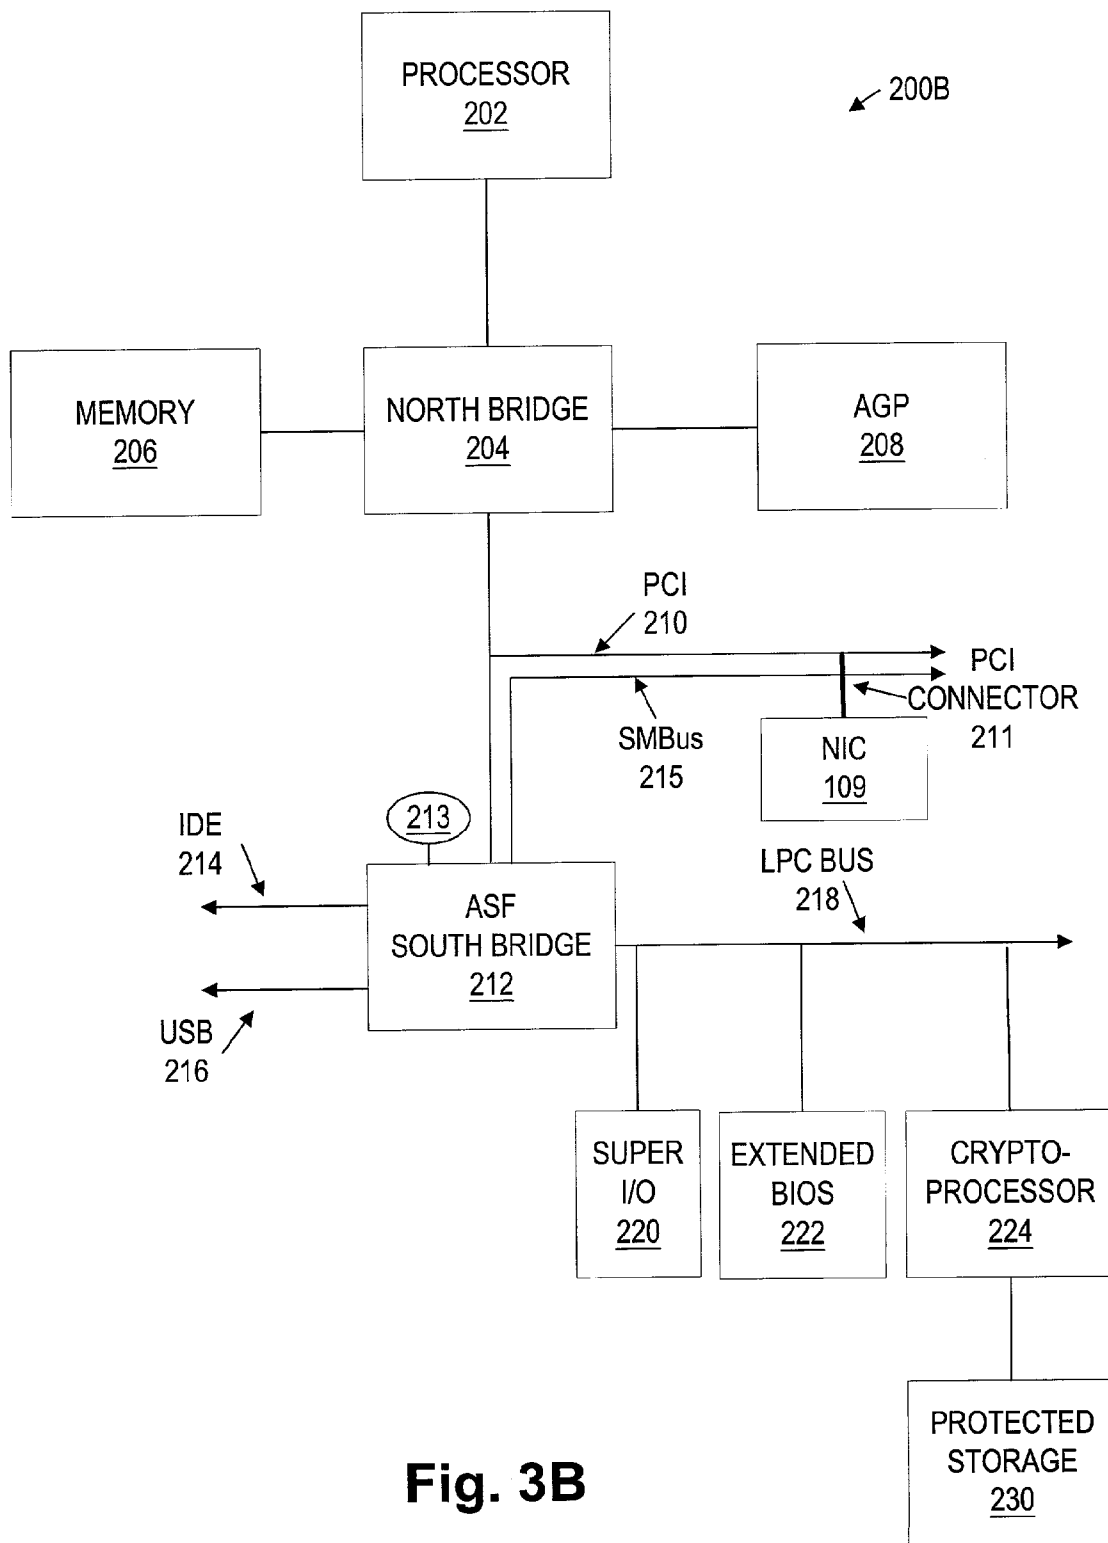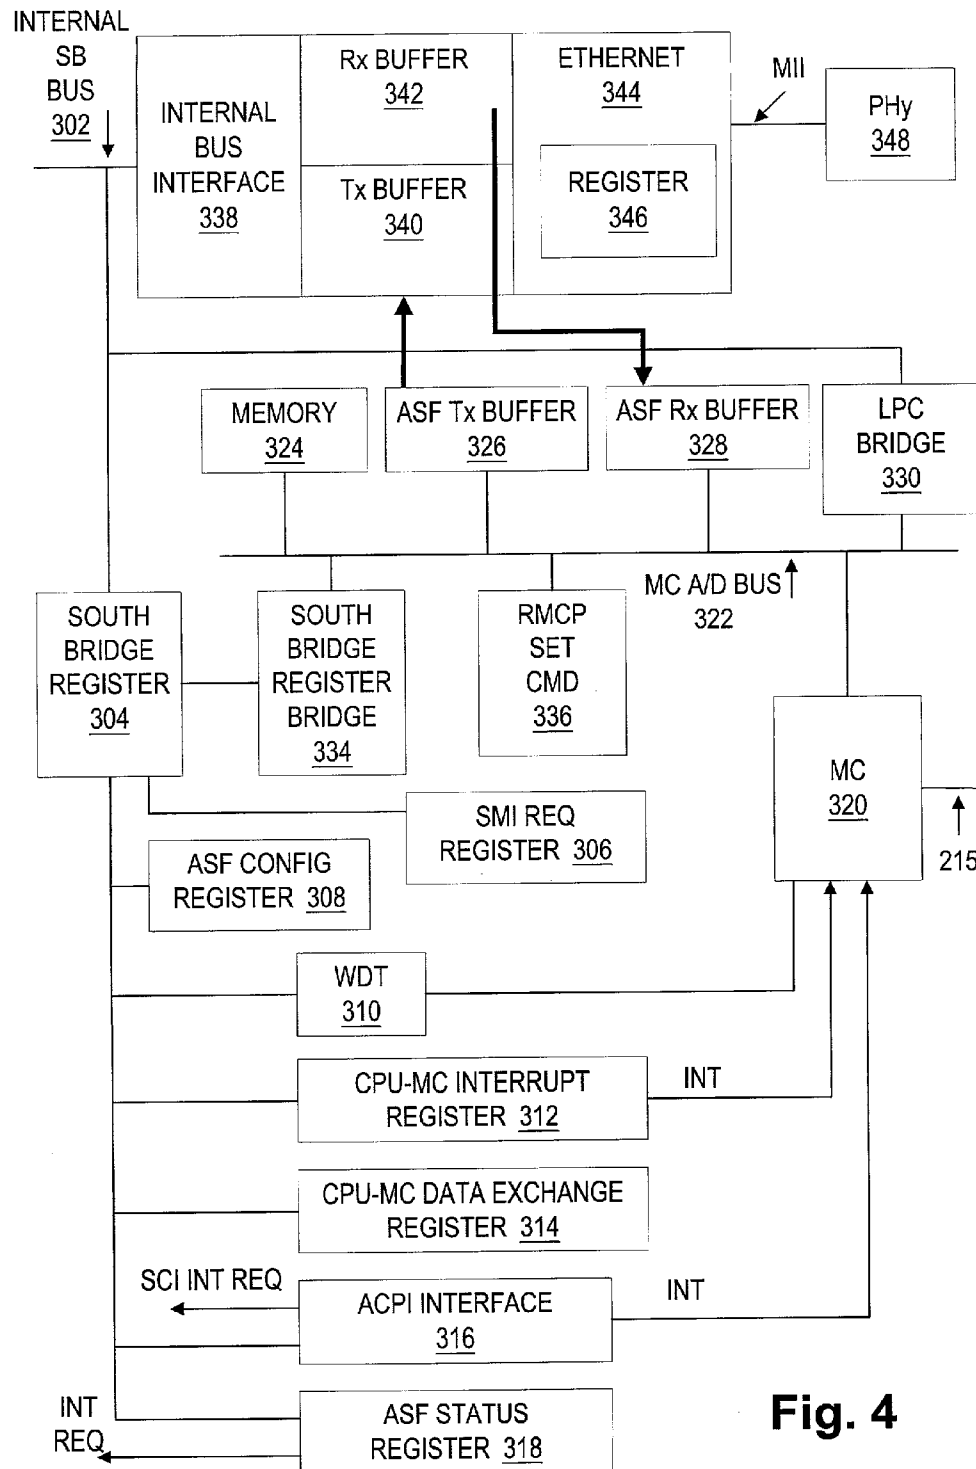
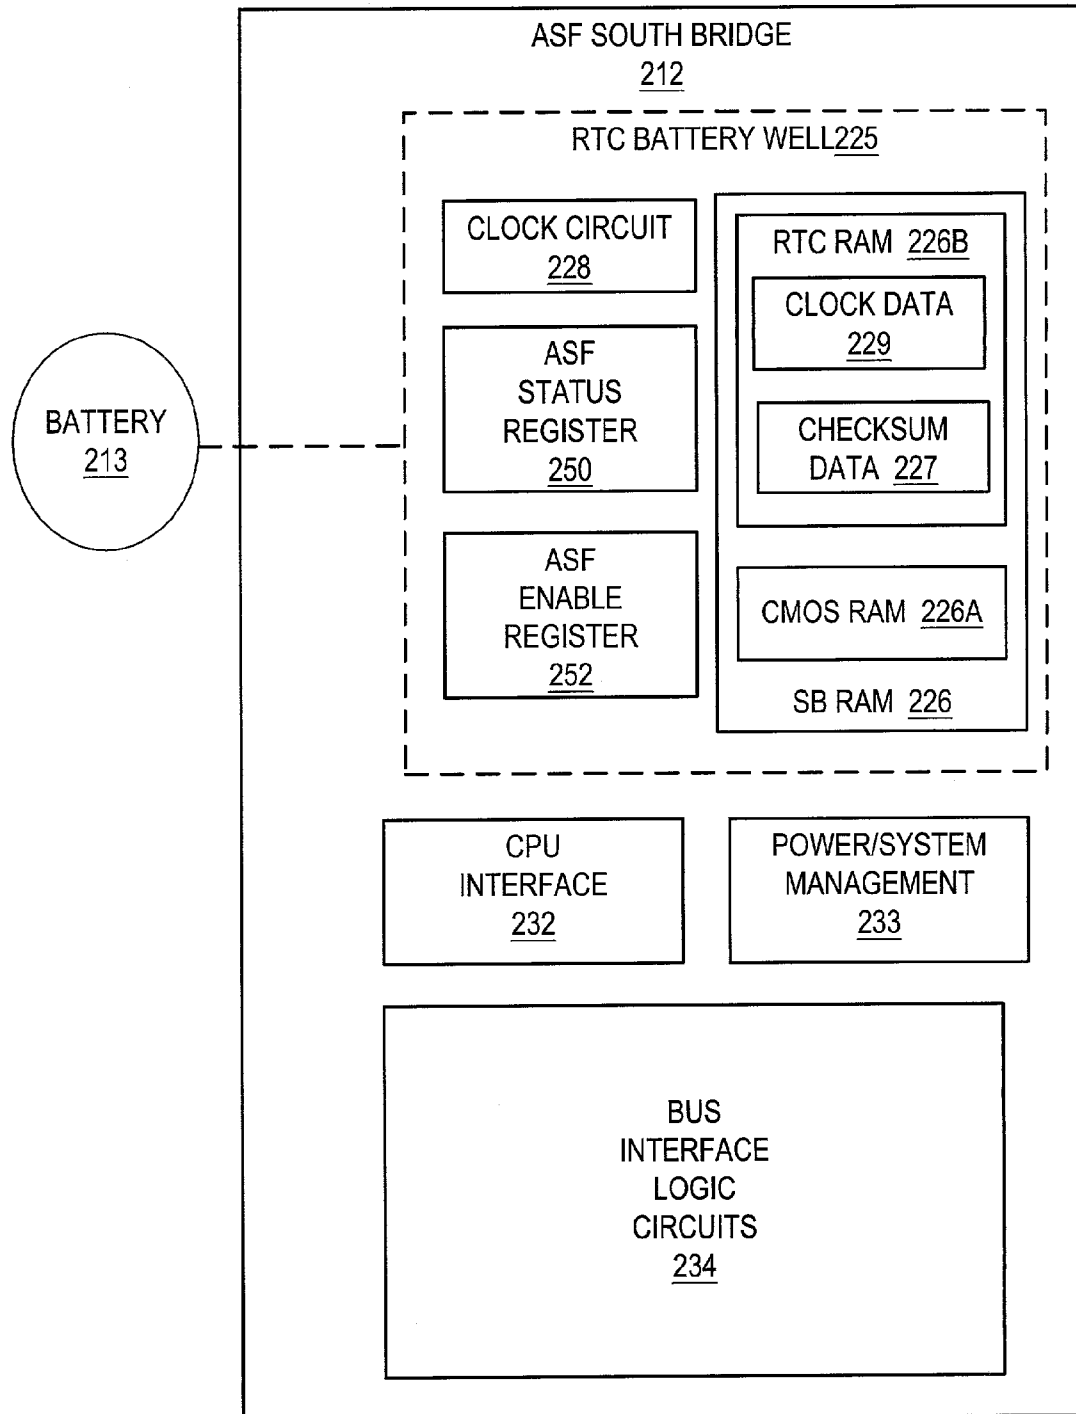



**Fig. 3B**


**Fig. 4**


**Fig. 5**


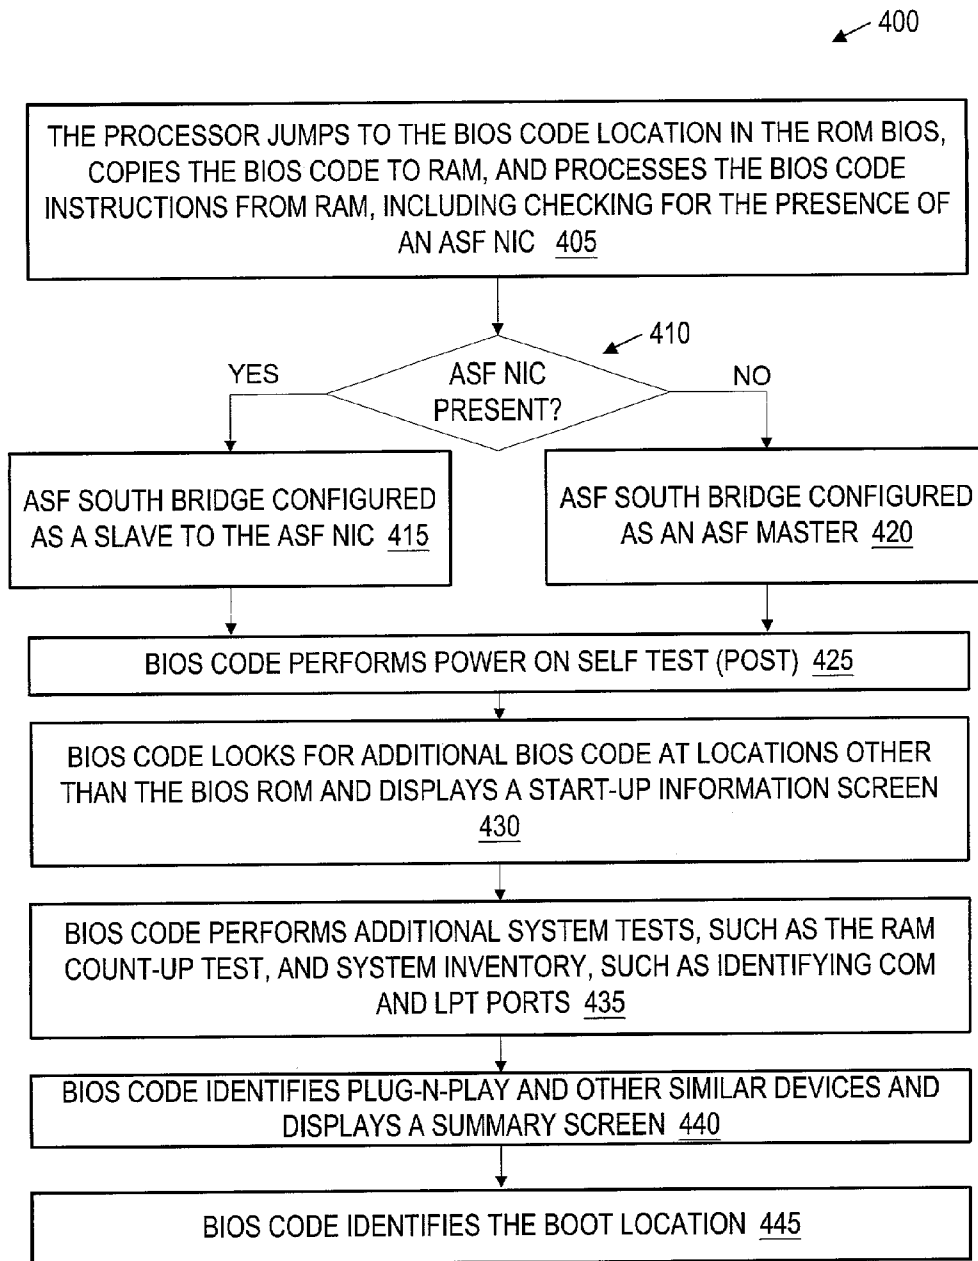
**Fig. 6**

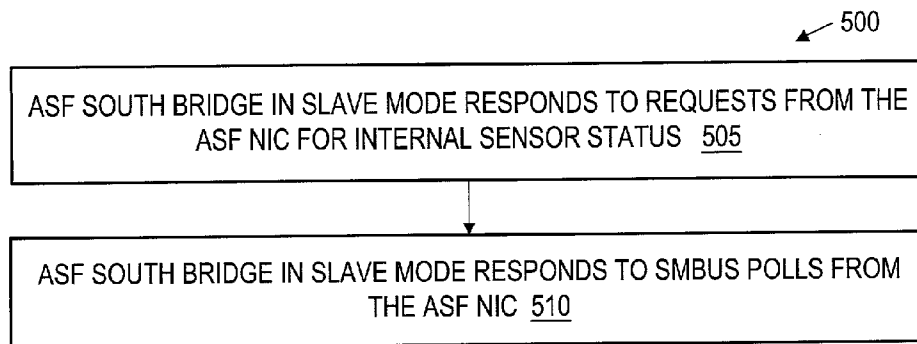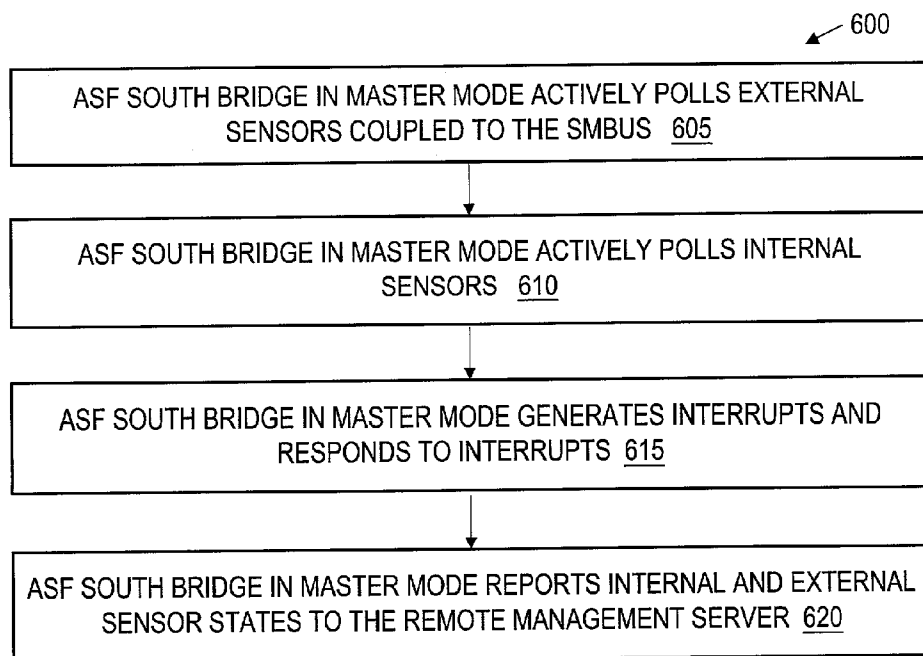
**Fig. 7A****Fig. 7B**

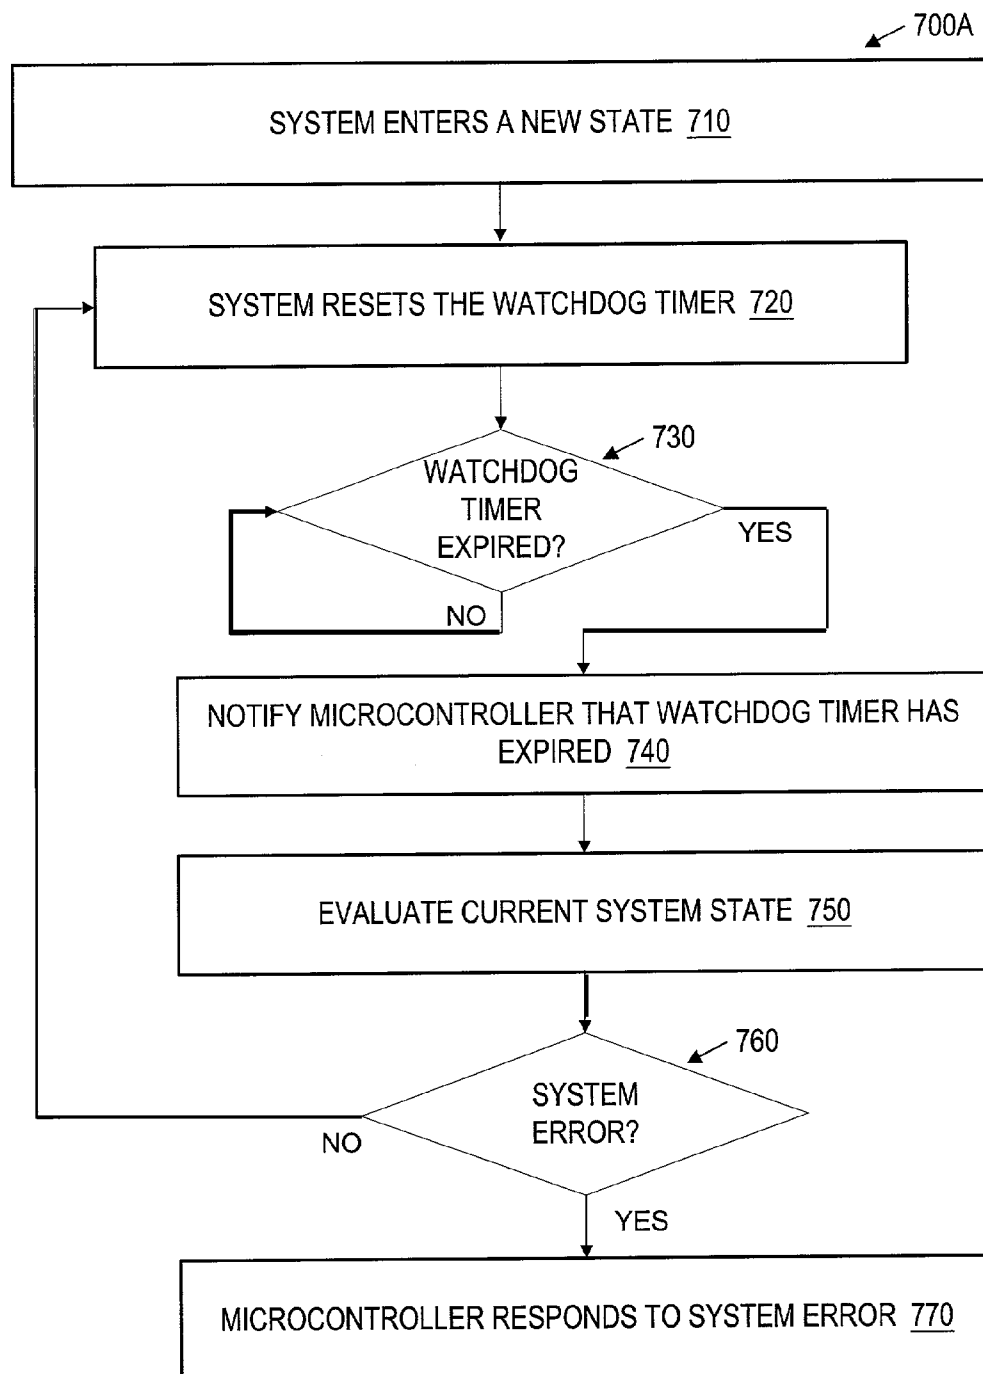**Fig. 8A**

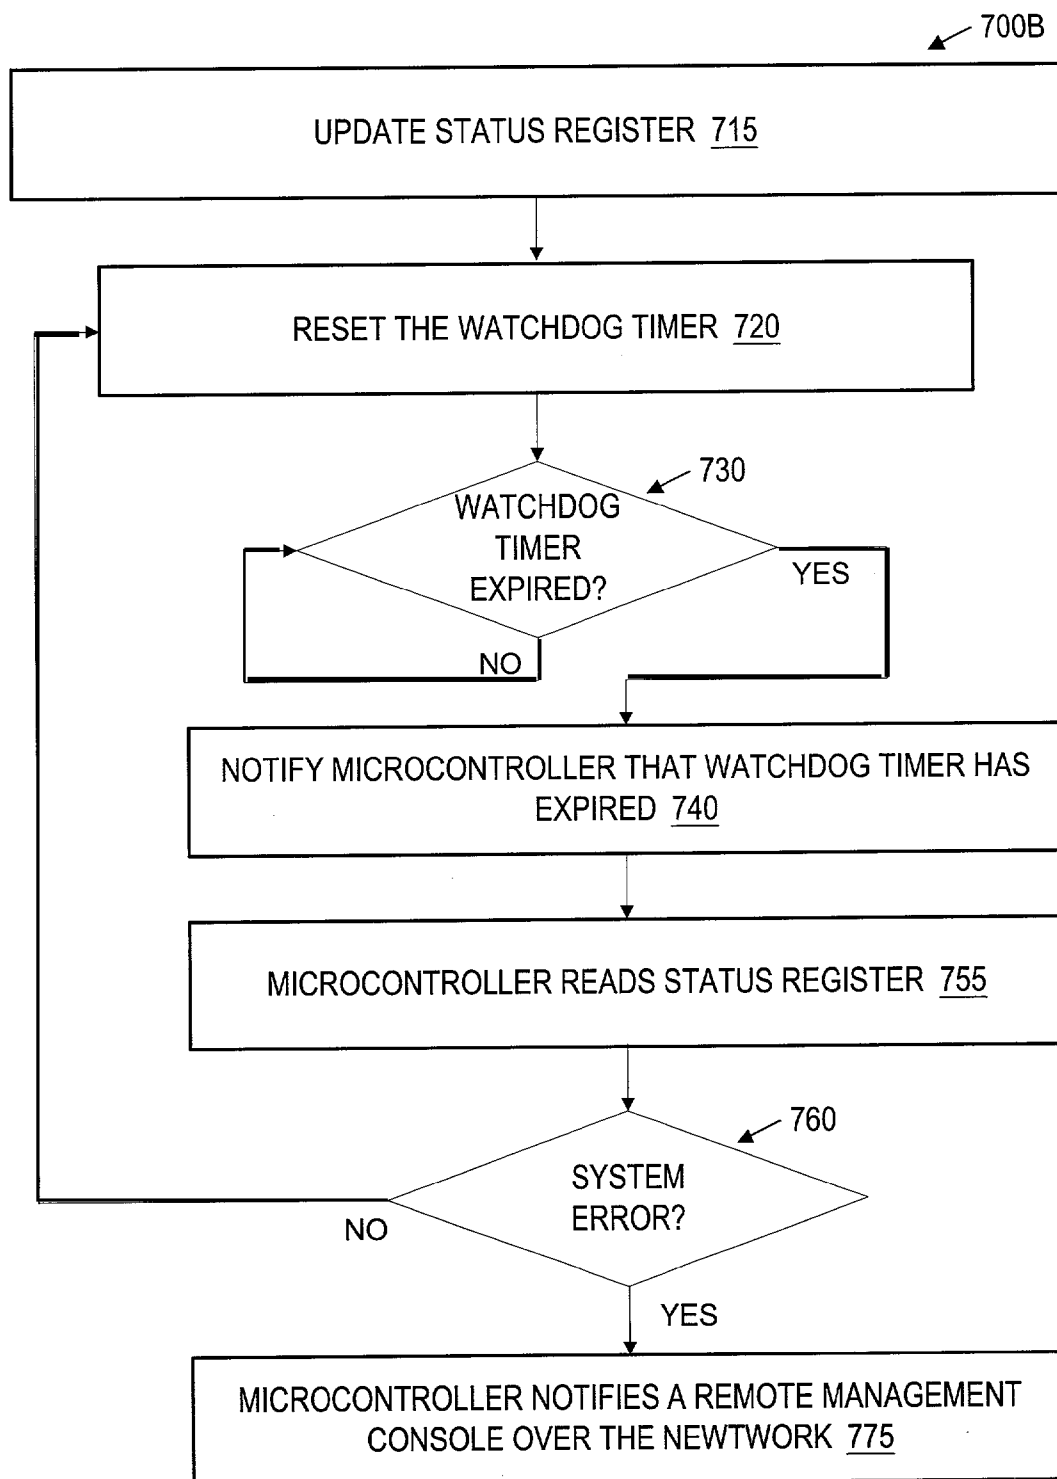**Fig. 8B**

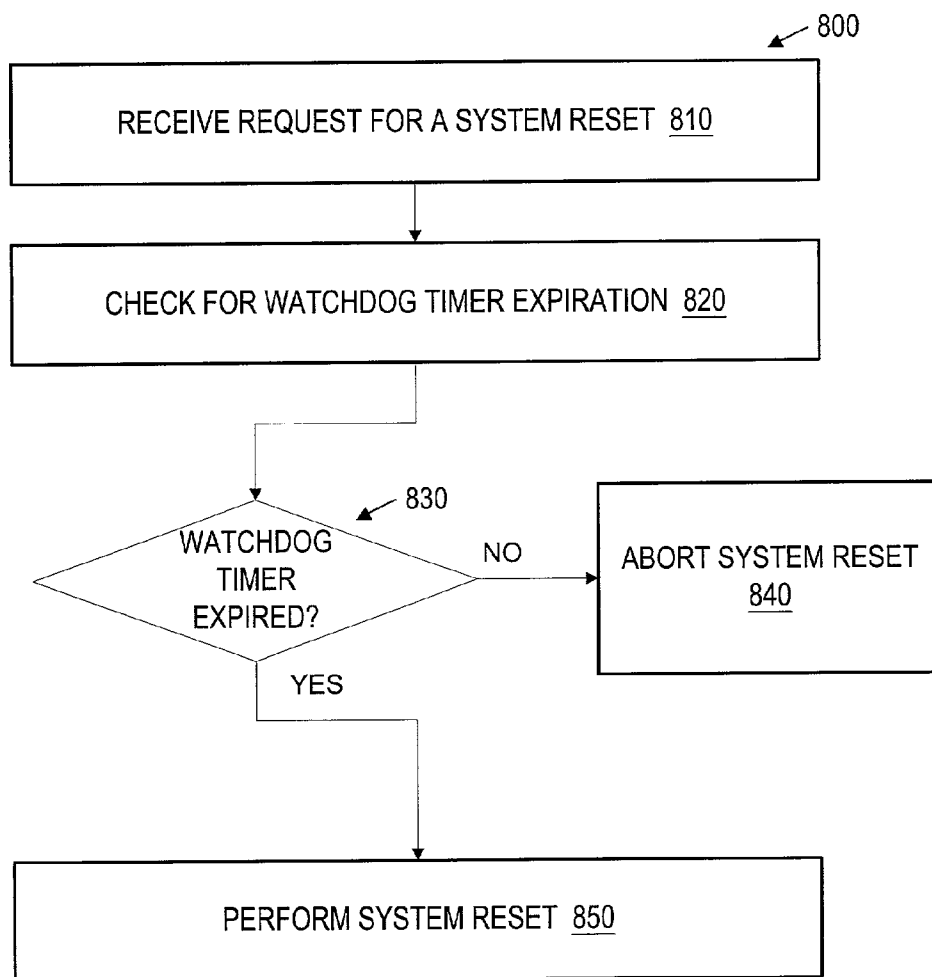**Fig. 9**

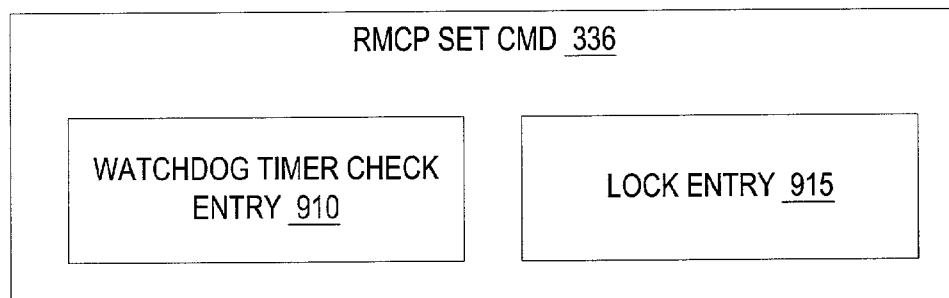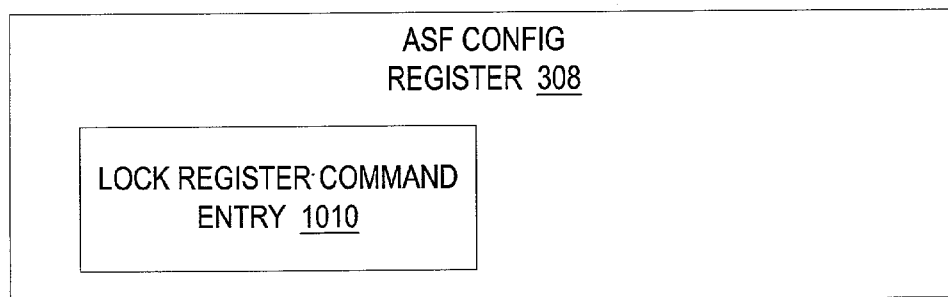**Fig. 10****Fig. 11**

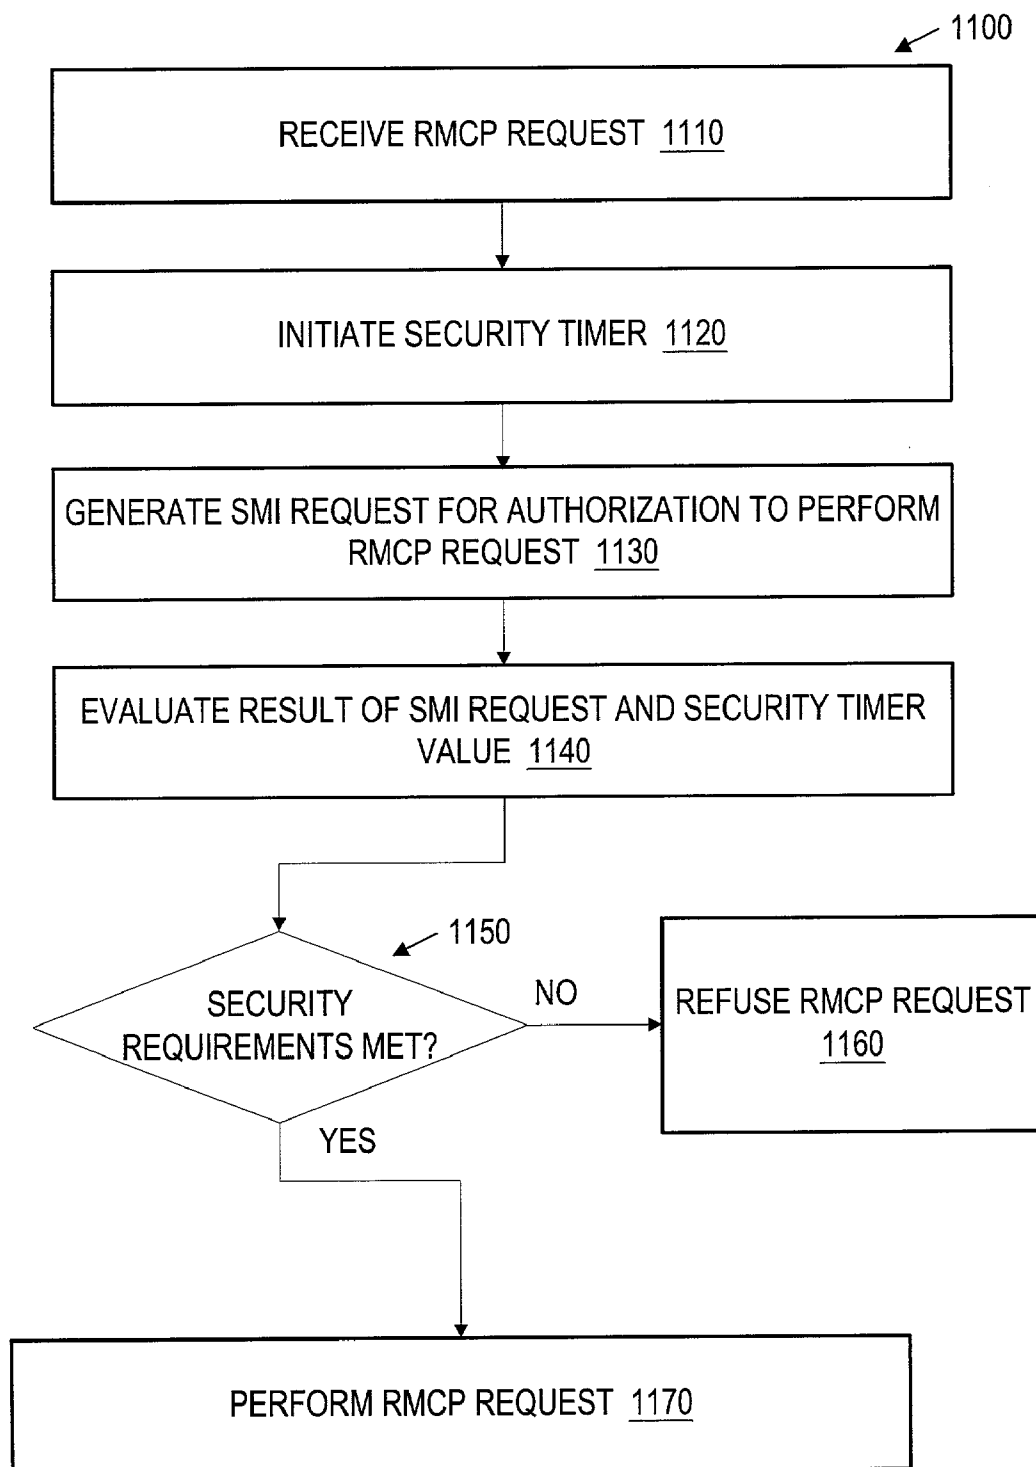**Fig. 12**

REMOTE MANAGEMENT MECHANISM TO PREVENT ILLEGAL SYSTEM COMMANDS

PRIORITY DATA

This application is a continuation-in-part of U.S. patent application Ser. 10/045,117, filed on Nov. 1, 2001, entitled, "Microcomputer Bridge for Remote Manageability," and whose inventor is Dale E. Gulick.

This application is also a continuation-in-part of U.S. patent application Ser. No. 10/033,142, filed on Nov. 1, 2001, entitled, "Microcomputer Bridge Architecture with an Embedded Microcontroller," and whose inventor is Dale E. Gulick.

This application is also a continuation-in-part of U.S. patent application Ser. No. 10/005,648, filed on Dec. 3, 2001, entitled, "Embedded Processor Supporting Both ACPI and ASF Operations," and whose inventor is Dale E. Gulick.

This application is also a continuation-in-part of U.S. patent application Ser. No. 10/066,879, filed on Feb. 4, 2002, entitled, "ASF State Determination using Chipset-Resident Watchdog Timer," and whose inventor is Dale E. Gulick.

This application is also a continuation-in-part of U.S. patent application Ser. No. 10/067,175, filed on Feb. 4, 2002, entitled, "Hardware Interlock Mechanism Using a Watchdog Timer," and whose inventor is Dale E. Gulick.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to computing systems, and, more particularly, to a system and method for preventing unwanted system state changes using a security timer, such as in a personal computer system.

2. Description of the Related Art

FIG. 1A illustrates an exemplary computer system **100**. The computer system **100** includes a processor **102**, a north bridge **104**, memory **106**, Advanced Graphics Port (AGP) device **108**, a network interface card (NIC) **109**, a Peripheral Component Interconnect (PCI) bus **110**, a PCI connector **111**, a south bridge **112**, a battery **113**, an AT Attachment (ATA) interface **114** (more commonly known as an Integrated Drive Electronics (IDE) interface), an SMBus **115**, a universal serial bus (USB) interface **116**, a Low Pin Count (LPC) bus **118**, an input/output controller chip (SuperI/O™) **120**, and BIOS memory **122**. It is noted that the north bridge **104** and the south bridge **112** may include only a single chip or a plurality of chips, leading to the collective term "chipset." It is also noted that other buses, devices, and/or subsystems may be included in the computer system **100** as desired, e.g. caches, modems, parallel or serial interfaces, SCSI interfaces, etc.

The processor **102** is coupled to the north bridge **104**. The north bridge **104** provides an interface between the processor **102**, the memory **106**, the AGP device **108**, and the PCI bus **110**. The south bridge **112** provides an interface between the PCI bus **110** and the peripherals, devices, and subsystems coupled to the IDE interface **114**, the SMBus **115**, the USB interface **116**, and the LPC bus **118**. The battery **113** is shown coupled to the south bridge **112**. The Super I/O™ chip **120** is coupled to the LPC bus **118**.

The north bridge **104** provides communications access between and/or among the processor **102**, memory **106**, the AGP device **108**, devices coupled to the PCI bus **110**, and devices and subsystems coupled to the south bridge **112**. Typically, removable peripheral devices are inserted into PCI "slots," shown here as the PCI connector **111**, that

connect to the PCI bus **110** to couple to the computer system **100**. Alternatively, devices located on a motherboard may be directly connected to the PCI bus **110**. The SMBus **115** may be "integrated" with the PCI bus **110** by using pins in the PCI connector **111** for a portion of the SMBus **115** connections.

The south bridge **112** provides an interface between the PCI bus **110** and various devices and subsystems, such as a modem, a printer, keyboard, mouse, etc., which are generally coupled to the computer system **100** through the LPC bus **118**, or one of its predecessors, such as an X-bus or an Industry Standard Architecture (ISA) bus. The south bridge **112** includes logic used to interface the devices to the rest of computer system **100** through the IDE interface **114**, the USB interface **116**, and the LPC bus **118**. The south bridge **112** also includes the logic to interface with devices through the SMBus **115**, an extension of the two-wire inter-IC bus protocol.

FIG. 1B illustrates certain aspects of the south bridge **112**, including reserve power by the battery **113**, so-called "being inside the RTC (real time clock) battery well" **125**. The south bridge **112** includes south bridge (SB) RAM **126** and a clock circuit **128**, both inside the RTC battery well **125**. The SB RAM **126** includes CMOS RAM **126A** and RTC RAM **126B**. The RTC RAM **126B** includes clock data **129** and checksum data **127**. The south bridge **112** also includes, outside the RTC battery well **125**, a CPU interface **132**, power and system management units **133**, and various bus interface logic circuits **134**.

Time and date data from the clock circuit **128** are stored as the clock data **129** in the RTC RAM **126B**. The checksum data **127** in the RTC RAM **126B** may be calculated based on the CMOS RAM **126A** data and stored by BIOS during the boot process, such as is described below, e.g. block **148**, with respect to FIG. 2. The CPU interface **132** may include interrupt signal controllers and processor signal controllers.

FIG. 1C illustrates a prior art remote management configuration for the computer system **100**. A motherboard **101** provides structural and base electrical support for the south bridge **112**, the PCI bus **110**, the PCI connector **111**, the SMBus **115**, and sensors **103A** and **103B**. The NIC **109**, a removable add-in card, couples to the motherboard **101**, the PCI bus **110**, and the SMBus **115** through the PCI connector **111**. The NIC **109** includes an Ethernet controller **105** and an ASF microcontroller **107**. The Ethernet controller **105** communicates with a remote management server **90**, passing management data and commands between the ASF microcontroller **107** and the remote management server **90**. The remote management server **90** is external to the computer system **100**.

An industry standard specification, generally referred to as the Alert Standard Format (ASF) Specification, defines one approach to "system manageability" using the remote management server **90**. The ASF Specification defines remote control and alerting interfaces capable of operating when an operating system of a client system, such as the computer system **100**, is not functioning. Generally, the remote management server **90** is configured to monitor and control one or more client systems. Typical operations of the ASF alerting interfaces include transmitting alert messages from a client to the remote management server **90**, sending remote control commands from the remote management server **90** to the client(s) and responses from the client(s) to the remote management server **90**, determining and transmitting to the remote management server **90** the client-specific configurations and assets, and configuring and controlling the client(s) by interacting with the operating system (s) of the client(s). In addition, the remote management

3

server **90** communicates with the ASF NIC **109** and the client(s). ASF NIC **109** communicates with local client sensors **103** and the local client host processor.

When the client has an ACPI-aware operating system functioning, configuration software for the ASF NIC **109** runs during a "one good boot" to store certain ASF, ACPI (Advanced Configuration and Power Interface), and client configuration data.

The transmission protocol in ASF for sending alerts from the client to the remote management server **90** is the Platform Event Trap (PET). A PET frame consists of a plurality of fields, including GUID (globally unique identifier), sequence number, time, source of PET frame at the client, event type code, event level, sensor device that caused the alert, event data, and ID fields.

Many events may cause an alert to be sent. The events may include temperature value over or under a set-point, voltage value over or under a set-point, fan actual or predicted failure, fan speed over or under a set-point, and physical computer system intrusion. System operation errors may also be alerts, such as memory errors, data device errors, data controller errors, CPU electrical characteristic mismatches, etc. Alerts may also correspond to BIOS or firmware progression during booting or initialization of any part of the client. Operating system (OS) events may also generate alerts, such as OS boot failure or OS timeouts. The ASF Specification provides for a "heartbeat" alert with a programmable period typically one minute but not to exceed 10 minutes, when the client does not send out the heartbeat, or "I am still here," message.

Client control functions are implemented through a remote management and control protocol (RCMP) that is a user datagram protocol (UDP) based protocol. RCMP is used when the client is not running the operating system. RCMP packets are exchanged during reset, power-up, and power-down cycles, each having a different message type. The remote management server **90** determines the ASF-RCMP capabilities of the client(s) by a handshake protocol using a presence-ping-request that is acknowledged by the client(s) and followed-up with a presence-pong that indicates the ASF version being used. The remote management server **90** then sends a request to the client to indicate the configuration of the client, which the client acknowledges and follows with a message giving the configuration of the client as stored in non-volatile memory during the "one good boot." The RCMP packets include a contents field, a type field, an offset field, and a value field.

RCMP message transactions involve a request from the remote management server **90**, a timed wait for an acknowledgement followed by a second timed wait for a response. If either of the time limits for the acknowledgement or the response is exceeded, then the remote management server **90** knows that either the client needs some of the packets resent or the client has lost contact due to failure of either the client or the communications link.

The ASF NIC **109** must be able to report its IP (Internet protocol) address (or equivalent) without the intervention of the operating system. Thus, the ASF NIC **109** must be able to receive and reply to ARP (Address Resolution Protocol) requests with the operating system, not interfere with ARP packets when the operating system is running, and wake-up for ARP packets when configured to do so. Note that ACPI includes waking-up for ARP packets as a standard configuration.

The following information is sent to the remote management server **90** from the client as an indication of the configuration of the client: an ACPI description table iden-

4

tifying sensors and their characteristics, ASF capabilities and system type for PET messages, and the client's support for RCMP and the last RCMP command; how the client configures an optional operating system boot hang watchdog timer; and the SMBIOS identification of the UUID/GUID for PET messages. ASF objects follow the ASL (ACPI Software Language) naming convention of ACPI.

In FIG. 2, a flowchart of a conventional method of initializing a computer system using code stored in the BIOS **122** is shown. During initialization of the power supply, the power supply generates a power good signal to the north bridge **104**, in block **136**. Upon receiving the power good signal from the power supply, the south bridge **112** (or north bridge **104**) stops asserting the reset signal for the processor **102**, in block **138**.

During initialization, the processor **102** reads a default jump location, in block **140**. The default jump location in memory is usually at a location such as FFFF0h. The processor **102** performs a jump to the appropriate BIOS code location (e.g. FFFF0h) in the ROM BIOS **122**, copies the BIOS code to the RAM memory **106**, and begins processing the BIOS code instructions from the RAM memory **106**, in block **142**. The BIOS code, processed by the processor **102**, performs a power-on self test (POST), in block **144**.

The BIOS code next looks for additional BIOS code, such as from a video controller, IDE controller, SCSI controller, etc. and displays a start-up information screen, in block **146**. As examples, the video controller BIOS is often found at C000h, while the IDE controller BIOS code is often found at C800h. The BIOS code may perform additional system tests, such as a RAM memory count-up test, and a system inventory, including identifying COM (serial) and LPT (parallel) ports, in block **148**. The additional system tests may include ASF, ACPI, and Ethernet initializations, including initiating a communications link with the remote management server **90**. The BIOS code also identifies plug-and-play devices and other similar devices and then displays a summary screen of devices identified, in block **150**.

The BIOS code identifies the boot location, and the corresponding boot sector, in block **152**. The boot location may be on a floppy drive, a hard drive, a CDROM, a remote location, etc. The BIOS code next calls the boot sector code at the boot location to boot the computer system, such as with an operating system, in block **154**.

It is noted that for a cold boot or a hard (re)boot, all or most of the descriptions given in blocks **136-154** may occur. During a warm boot or a soft (re)boot the BIOS code usually jumps from block **142** into block **148**, skipping the POST, memory tests, etc.

Remote management techniques such as ASF are predicated on the NIC **109** being installed for "one good boot" of the operating system so that initialization of the remote management hardware and/or firmware can be supervised by the operating system. Improvements in remote management for personal computers may speed the initialization of remote management hardware and/or firmware and may lessen the dependence on the operating system. A computer system **100** with a long boot time slows productivity and, at a minimum, irritates users. It would be desirable to shorten boot times if possible, and to avoid unnecessary reboots.

SUMMARY OF THE INVENTION

In one aspect of the present invention, a method of operating a computer system is disclosed. The method includes receiving a request for a system action and initiating a timer. The method also includes generating an autho-

5

rization request for the system action and evaluating a result of the authorization request for the system action if received before an expiration of the timer. The method also includes granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

In another aspect of the present invention, another method of operating a computer system is disclosed. This method includes the steps of receiving a request for a system action and initiating a timer. The method also includes the steps of generating an authorization request for the system action and evaluating a result of the authorization request for the system action if received before an expiration of the timer. The method also includes the step of granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

In still another aspect of the present invention, a computer readable medium encoded with instructions that, when executed by a computer system, performs a method for operating the computer system is disclosed. The method includes receiving a request for a system action and initiating a timer. The method also includes generating an authorization request for the system action and evaluating a result of the authorization request for the system action if received before an expiration of the timer. The method also includes granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

In yet another aspect of the present invention, a computer system is disclosed. The computer system includes a timer, an SMI request register, and a processor. The processor is coupled to the timer and coupled to the SMI request register. The processor is configured to receive an authorization request for a system action. The processor is further configured to initialize the timer in response to receiving the authorization request for the system action.

In still another aspect of the present invention, another computer system is disclosed. This computer system includes a timing means, an SMI request means, and a processing means. The processing means is coupled to the timing means and coupled to the SMI request means. The processing means is configured to receive an authorization request for a system action. The processing means is further configured to initialize the timing means in response to receiving the authorization request for the system action.

In still yet another aspect of the present invention, another computer system is disclosed. This computer system includes means for receiving a request for a system action and means for initiating a timer. The computer system also includes means for generating an authorization request for the system action and means for evaluating a result of the authorization request for the system action if received before an expiration of the timer. The computer system also includes means for granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may be understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify similar elements, and in which:

FIG. 1A illustrates a block diagram of a prior art computer system;

6

FIG. 1B illustrates a block diagram of a prior art south bridge; and

FIG. 1C illustrates a prior art remote management arrangement;

FIG. 2 illustrates a flowchart of a prior art method for booting a computer system using code stored in ROM;

FIGS. 3A and 3B illustrate block diagrams of embodiments of computer systems having remote management arrangements, according to various aspects of the present invention;

FIG. 4 illustrates a block diagram of an embodiment of an ASF south bridge including integrated ASF, ACPI, and/or Ethernet capabilities, according to various aspects of the present invention;

FIG. 5 illustrates a block diagram of an embodiment of the ASF south bridge including ASF registers in the RTC battery well of the ASF south bridge, according to various aspects of the present invention;

FIG. 6 illustrates a flowchart an embodiment of a method for booting a computer system including the ASF south bridge of FIG. 4, according to one aspect of the present invention;

FIGS. 7A and 7B illustrate flowcharts of embodiments of methods for operating a computer system including the ASF south bridge of FIG. 4, according to various aspects of the present invention;

FIGS. 8A and 8B illustrate flowcharts of embodiments of methods for determining system state upon an expiration of a watchdog timer, according to various aspects of the present invention;

FIG. 9 illustrates a flowchart of an embodiment of a method for evaluating requests for system resets, according to one aspect of the present invention;

FIGS. 10 and 11 illustrate embodiments of functional parts of the ASF south bridge, according to various aspects of the present invention; and

FIG. 12 illustrates a flowchart of an embodiment of a method for verifying RCMP requests, according to one aspect of the present invention.

While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and are herein described in detail. It should be understood, however, that the description herein of specific embodiments is not intended to limit the invention to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS

Illustrative embodiments of the invention are described below. In the interest of clarity, not all features of an actual implementation are described in this specification. It will, of course, be appreciated that in the development of any such actual embodiment, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the art having the benefit of this disclosure. The use of a letter in association with a reference number is

intended to show alternative embodiments or examples of the item to which the reference number is connected.

The following co-pending U.S. patent applications are hereby incorporated by reference in their entireties, as if set forth fully herein:

[LPC Extension Application] "Method And Apparatus For Extending Legacy Computer Systems", U.S. patent application Ser. No. 09/544,858, filed on Apr. 7, 2000, whose inventor is Dale E. Gulick; and

[Secure Execution Mode Applications] U.S. patent application Ser. No. 09/852,372, entitled, "Secure Execution Box and Method," filed on May 10, 2001, whose inventors are Dale E. Gulick and Geoffrey S. Strongin;

U.S. patent application Ser. No. 09/852,942, entitled, "Computer System Architecture for Enhanced Security and Manageability," filed on May 10, 2001, whose inventors are Geoffrey S. Strongin and Dale E. Gulick;

U.S. patent application Ser. No. 09/853,395, entitled, "Enhanced Security and Manageability using Secure Storage in a Personal Computer System," filed on May 11, 2001, whose inventors are Geoffrey S. Strongin and Dale E. Gulick;

U.S. patent application Ser. No. 09/853,446, entitled, "Resource Sequester Mechanism," filed on May 11, 2001, whose inventor is and Dale E. Gulick;

U.S. patent application Ser. No. 09/853,447, entitled, "Integrated Circuit for Security and Manageability," filed on May 11, 2001, whose inventors are Dale E. Gulick and Geoffrey S. Strongin;

U.S. patent application Ser. No. 09/853,225, entitled, "System Management Mode Duration and Management," filed on May 11, 2001, whose inventors are Geoffrey S. Strongin and Dale E. Gulick;

U.S. patent application Ser. No. 09/853,226, entitled, "Mechanism for Closing Back Door Access Mechanisms in Personal Computer Systems," filed on May 11, 2001, whose inventor is Geoffrey S. Strongin;

U.S. patent application Ser. No. 09/854,040, entitled, "Cryptographic Randomness Register for Computer System Security," filed on May 11, 2001, whose inventor is Dale E. Gulick;

U.S. patent application Ser. No. 09/853,465, entitled, "Cryptographic Command-Response Access to a Memory in a Personal Computer System," filed on May 11, 2001, whose inventor is Geoffrey S. Strongin;

U.S. patent application Ser. No. 09/853,443, entitled, "Protection Mechanism for Biometric Input Data," filed on May 11, 2001, whose inventors are Dale E. Gulick and Geoffrey S. Strongin;

U.S. patent application Ser. No. 09/853,437, entitled, "Personal Computer Security Mechanism," filed on May 11, 2001, whose inventors are Geoffrey S. Strongin and Dale E. Gulick;

U.S. patent application Ser. No. 09/853,335, entitled, "Asset Sharing between Host Processor and Security Hardware," filed on May 11, 2001, whose inventors are Geoffrey S. Strongin and Dale E. Gulick;

U.S. patent application Ser. No. 09/853,234, entitled, "Interruptable and Re-enterable System Management Mode Programming Code," filed on May 11, 2001, whose inventors are Geoffrey S. Strongin and Dale E. Gulick;

U.S. patent application Ser. No. 09/871,084, entitled, "Locking Mechanism Override and Disable for Personal Computer ROM Access Protection," filed on May 30, 2001, whose inventors are Frederick D. Weber and Dale E. Gulick;

U.S. patent application Ser. No. 09/871,511, entitled, "Monotonic Counter Mechanism for Computer System Security," filed on May 30, 2001, whose inventors Frederick D. Weber and Dale E. Gulick;

5 U.S. patent application Ser. No. 09/870,890, entitled, "Secure Booting of a Personal Computer System," filed on May 30, 2001, whose inventors are Geoffrey S. Strongin, Dale E. Gulick, and Frederick Weber; and
 U.S. patent application Ser. No. 09/870,889, entitled,
 10 "External Locking Mechanism for Personal Computer Memory Locations", filed on May 30, 2001, whose inventors are Geoffrey S. Strongin, Dale E. Gulick, and Frederick Weber.

The following non-patent documents are hereby incorporated by reference in their entirety, without prejudice and without disclaimer, as if set forth fully herein:

[ASF] Alert Standard Format Specification, 1.03, 20 Jun. 2001, DSP0114, and earlier version, <http://www.dmtf.org/spec/asf.html>;

20 [ACPI] *Advanced Configuration and Power Interface Specification*, 2.0, 27 Jul. 2000, and earlier version, <http://www.teleport.com/~acpi/spec.htm>;

[RFC1157] *A Simple Network Management Protocol*, <http://www.ietf.org/rfc/rfc1157.txt>;

25 [CIM] CIM Standards, <http://www.dmtf.org/spec/cims.html>;

[IPMI] *Intelligent Platform Management Interface Specification* v1.0, rev 1.1, Aug. 26, 1999, and earlier versions, <http://developer.intel.com/design/servers/ipmi/>;

30 [RFC1188] *IP and ARP on FDDI Networks*, <http://www.ietf.org/rfc/rfc1180.txt>;

[FRU] *IPMI Field Replaceable Unit (FRU) Information Storage Definition*, v1.0, 16 Sep. 1998, and earlier versions, <ftp://download.intel.com/design/servers/ipmi/fru1010.pdf>;

35 [MTLS] *Metolious ACPI/Manageability Specification*, v1.0, 30 Apr. 1999, <http://developer.intel.com/ial/metolious/index.htm>;

[NDCPM] *Network Device Class Power Management Reference Specification*, v1.0a, 21 Nov. 1997, <http://www.microsoft.com/hwdev/specs/PMref/PMnetwork.htm>;

[PET] *Platform Event Trap Specification*, v1.0, 7 Dec. 1998, and earlier versions, <ftp://download.intel.com/design/servers/ipmi/pet100.pdf>;

45 [SCMIS] *SMBus Control Method Interface Specification*, v1.0, 10 Dec. 1999, and earlier versions, <http://www.smbus.org/specs/index.html>;

[SMBIOS] *System Management BIOS Reference Specification*, v2.3.1, 16 Mar. 1999, and earlier versions, <ftp://download.intel.com/ial/wfm/smbios.pdf>;

50 [SMBUS_2.0] *System Management Bus (SMBus) Specification*, v2.0, 03 Aug. 2000, and earlier versions, <http://www.smbus.org/specs/index.html>; and

[RFC-UDP] *User Datagram Protocol*, RFC 768, <http://www.ietf.org/rfc/rfc0768.txt>

Turning now to FIGS. 3A and 3B, block diagrams of embodiments of computer systems **200A** and **200B** having remote management arrangements are shown, according to various aspects of the present invention. In FIG. 3A, an ASF south bridge **212** may include integrated ASF, ACPI, and/or Ethernet capabilities for improved remote manageability.

The computer system **200A** of FIG. 3A includes a processor **202**, a north bridge **204**, memory **206**, Advanced Graphics Port (AGP) device **208**, a PCI bus **210**, a PCI connector **211**, the ASF south bridge **212**, a battery **213**, an AT Attachment (ATA) interface **214**, an SMBus **215**, a USB interface **216**, an LPC bus **218**, an input/output controller

chip (SuperI/O™) **220**, extended BIOS memory **222**, and, optionally, a crypto-processor **224** and protected storage **230**. It is noted that the north bridge **204** and the ASF south bridge **212** may include only a single chip or a plurality of chips in the “chipset.” It is also noted that other buses, devices, and/or subsystems may be included in the computer system **200A** as desired, e.g. caches, modems, parallel or serial interfaces, SCSI interfaces, etc.

The processor **202** is coupled to the north bridge **204**. The north bridge **204** provides an interface between the processor **202**, the memory **206**, the AGP device **208**, and the PCI bus **210**. The ASF south bridge **212** provides an interface between the PCI bus **210** and the peripherals, devices, and subsystems coupled to the IDE interface **214**, the SMBus **215**, the USB interface **216**, and the LPC bus **218**. The battery **213** is shown coupled to the ASF south bridge **212**. The Super I/O™ chip **220**, the extended BIOS **222**, and the crypto-processor **224** are coupled to the LPC bus **218**. The protected storage **230** is coupled through the crypto-processor **224**.

The north bridge **204** provides communications access between and/or among the processor **202**, memory **206**, the AGP device **208**, devices coupled to the PCI bus **210** and devices and subsystems coupled to the ASF south bridge **212**. Typically, removable peripheral devices are inserted into PCI “slots,” shown here as the PCI connector **211**, that connect to the PCI bus **210** to couple to the computer system **200A**. Alternatively, devices located on a motherboard may be directly connected to the PCI bus **210**. The SMBus **215** is “integrated” with the PCI bus **210** by using pins in the PCI connector **211** for a portion of the SMBus **215** connections.

The ASF south bridge **212** provides an interface between the PCI bus **210** and various devices and subsystems, such as a modem, a printer, keyboard, mouse, etc., which are generally coupled to the computer system **200A** through the LPC bus **218** (or its predecessors, such as the X-bus or the ISA bus). The ASF south bridge **212** includes logic used to interface the devices to the rest of computer system **200A** through the IDE interface **214**, the SMBus **215**, preferably supporting masters external to the ASF south bridge **212**, the USB interface **216**, and the LPC bus **218**.

It is also noted that the operations of the LPC bus **218** may correspond to the prior art Low Pin Count Interface Specification Revision 1.0 of Sep. 29, 1997. The operations of the LPC bus **218** may also correspond to the extended LPC bus disclosed in the LPC Extension Application previously incorporated herein by reference.

The extended BIOS **222** includes additional memory locations different from or in addition to those memory locations in the BIOS memory **122**. The additional memory locations may have specific read/write permissions and/or be secure memory locations. Additional details may be found in the Secure Execution Mode Applications previously incorporated herein by reference. Memory addressing for the extended BIOS **222** may be as taught in the LPC Extension Application previously incorporated herein by reference. The crypto-processor **224** may provide security for the protected storage **230**. Various embodiments for accessing the protected storage through the crypto-processor **224** are provided in the Secure Execution Mode Applications previously incorporated herein by reference.

As mentioned above, the ASF south bridge **212** may include integrated ASF, ACPI, and/or Ethernet functionality, according to various aspects of the present invention. As there is no ASF NIC **109** in the computer system **200A**, according to one aspect of the present invention, the ASF south bridge **212** recognizes that it must be a master ASF

controller for the computer system **200A**, during a power-up cycle. The computer system **200A** may advantageously boot faster than the computer system **100** by initiating the ASF and/or ACPI assets in the ASF south bridge **212** during the main portion of the BIOS loading since the ASF, ACPI, and/or Ethernet hardware are known to the BIOS code writer before the BIOS code is written. The BIOS code itself may then be enlarged to include any or all ASF, ACPI, and/or Ethernet initialization data and/or firmware. Additional details of various embodiments of the present invention are given below.

In FIG. 3B, the computer system **200B** differs from the computer system **200A** in that the computer system **200B** includes the ASF NIC **109** at the PCI connector **211**. In the computer system **200B**, the ASF south bridge **212**, according to one aspect of the present invention should recognize that it should be an ASF slave to the ASF NIC **109**.

The Secure Execution Mode Applications previously incorporated herein by reference teach that power management functions may be performed inside a secure execution mode (SEM), including using security hardware integrated into the south bridge. One current standard for power management and configuration is the ACPI Specification. According to the ACPI specification, control methods, a type of instruction, tell the computer system to perform an operation. The ACPI specification does not explain how to carry out any of the instructions. The ACPI specification only defines the calls, and the software must be written to carry out the calls in a proscribed manner. The proscribed manner of the ACPI specification is very restrictive. One cannot access some registers in the hardware. To access those registers, one can generate an SMI# (System Management Interrupt) to enter SMM and read these registers, as taught in the Secure Execution Mode Applications previously incorporated herein by reference. As power management has the potential to be abused e.g. change the processor voltage and frequency, raised above operating limits to destroy the processor, or lowered below operating limits leading to a denial of service, ACPI calls should be carried out in a secure manner, such as inside SEM.

Inside SEM, each ACPI request can be checked against some internal rules for safe behavior. Using terminology more completely described in the Secure Execution Mode Applications previously incorporated herein by reference, the ACPI request would be placed in an “inbox” (incoming-only memory locations in the south bridge) of a “mailbox” (one-direction-only memory locations in the south bridge), parameter values read from the inbox, the ACPI request evaluated using the inbox parameters for acceptability, and then either fulfill the request or not, based on the evaluation results. For additional details of various embodiments, see the Secure Execution Mode Applications previously incorporated herein by reference, including FIGS. 6, 42A and 42B therein.

System Management Mode (SMM) is a mode of operation in the computer system that was implemented to conserve power. The SMM was created for the fourth generation x86 processors, and is different from x86 operating mode. As newer x86 generation processors have appeared, the SMM has become relatively transparent to the operating system. That is, computer systems enter and leave the SMM with little or no impact on the operating system.

In FIG. 4, one embodiment of the ASF south bridge **212** is illustrated, according to various aspects of the present invention. As shown, an internal south bridge bus **302** couples a south bridge register **304** with an internal bus interface **338** of an Ethernet controller **344** and an LPC

11

bridge 330. The south bridge register 304 also couples to an SMI request register 306, an ASF configuration register 308, a watchdog timer (WDT) 31, a CPU-MC (microcontroller) interrupt register 312, a CPU-MC data exchange register 314, an ACPI interface 316, an ASF status register 318, and a south bridge register bridge 334. The south bridge register bridge 334 also couples to an MC address/data (A/D) bus 322.

Also coupled to the MC A/D bus 322 are a memory 324, an ASF transmit (Tx) buffer 326, an ASF receive (Rx) buffer 328, the LPC bridge 330, an RMCP set command unit 336, and an embedded microcontroller 320. The MC 320 is also coupled to the WDT 310 and coupled to receive an interrupt (INT) from the CPU-MC interrupt register 312 and the ACPI interface 316. The ACPI interface 316 also generates an SCI interrupt request. The ASF status register 318 also generates an interrupt request. The embedded Ethernet controller also includes a Rx buffer coupled to the ASF Rx buffer 328, a Tx buffer 340 coupled to the ASF Tx buffer 326, and an Ethernet core 344, including a register 346. The Ethernet core 344 is shown coupled to a PHY 348 through an MII (Machine Independent Interface). The PHY 348 may be external to the ASF south bridge 212.

The MC 320 couples to the SMBus 215, not shown. The MC 320 may use software-drive I/O ports for the SMBus protocol, according to one aspect of the present invention, using so-called "chapter 13 interfaces" of the ACPI Specification, named from their definition given in chapter 13 of the ACPI Specification. In this embodiment, the processor (CPU) 202 can master the SMBus 215. The MC 320 may store assignable addresses in the memory 324, with fixed motherboard-resident legacy sensor addresses store in the BIOS ROM 122 or the extended BIOS 222. When the ASF NIC 109 is present and the ASF south bridge 212 is operating in slave mode, any sensors internal to the ASF south bridge 212 should be visible to the ASF NIC 109.

The embedded Ethernet controller, including the Ethernet core 344, may be configured at boot time from either BIOS code stored in the extended BIOS or by the MC 320 reading values from an EEPROM, not shown, and writing the register 346. It is noted that the register 346 may include a plurality of storage locations or a plurality of registers each with one or more storage locations.

It is noted that the MC 320 may have some number of general purpose I/O pins, not shown. The input pins may be used to generate panic interrupts to the MC 320. The output pins may be used to control motherboard functions that are desired when the processor 202 may be "hung" and for ASF slave mode panic generation. The ASF slave mode panic generation may substitute for "pushes" of sensor 103 outputs. The general purpose I/O inputs may generate an interrupt to the MC 320 or be polled by the MC 320, as desired.

The SMI request register 306 is configured to generate an SMI interrupt when an interrupt vector is written to the SMI request register 306. The interrupt vector is passed to an interrupt controller, not shown. It is noted that the SMI request register 306 may be in addition to or the same as the corresponding SMM initiator or SMM initiation register of the Secure Execution Mode Applications previously incorporated herein by reference.

The memory 324 may include ROM and/or RAM, as desired. The MC 320 may read configuration data from ROM in the memory 324 and shadow the configuration data in RAM in the memory 324. The configuration data may be stored in the extended BIOS 222 and shadowed in the RAM.

12

Note that the ACPI interface 316 couples to the power/system management core 233, shown in FIG. 3, in the ASF south bridge 212.

The watchdog timer 310 may be reset at predetermined times, such as upon an occurrence of an ASF event. The watchdog timer 310 may also be reset upon an occurrence of an ACPI event. The watchdog timer may also be stopped in predetermined modes of operation.

In one embodiment, the watchdog timer 310 may operate similar to a TCO counter (or timer), which may include a programmable timer, such as a count-down timer, that is used to detect a lock-up of the computer system 200. Lock-up may be defined as a condition of the computer system 200 where one or more subsystems or components do not respond to input signals for more than a predetermined period of time. The input signals may include internal signals from inside the computer system 200 or signals from outside the computer system 200, such as from a user input device (e.g., keyboard, mouse, trackball, biometric device, etc.). It is also noted that the lock-ups may be software or hardware in nature. According to various aspects of the present invention, the watchdog timer 310 as the TCO counter may be programmed and read from inside SMM.

In one embodiment, the watchdog timer 310 as the TCO timer generates an MC 320 interrupt upon a first expiration of the watchdog timer 310. In another embodiment, the watchdog timer 310 as the TCO timer generates an SMI# upon a first expiration of the watchdog timer 310, and the watchdog timer 310 generates a reset signal for the computer system upon a second, subsequent expiration of the watchdog timer 310. Examples of system states for which the watchdog timer 310 may expire include, but are not limited to, failure to fetch a first instruction, such as with the processor 202 is missing or has failed, a BIOS procedure hang or failure, and an operating system hang or failure.

In one embodiment, the watchdog timer 310 as the TCO timer may be accessed by the computer system 200 or software running in the computer system 200 for the computer system 120 to recover from lock-ups when the computer system is not in SMM. In another embodiment, the watchdog timer 310 as the TCO timer may be accessed by the computer system 200 both in and out of SMM.

Additional information on the TCO counter embodiments for the watchdog timer 310 may be found in copending U.S. patent application Ser. No. 09/853,443, previously incorporated by reference. Note that the watchdog timer 310 may also operate as a counter (counting up) instead of a timer (counting down) without departing from the teachings herein.

In one embodiment, the MC 320 is a conventionally available microcontroller, such as an embedded 8051 microcontroller. The 8051 microcontroller and related microcontrollers have well-known functionality in the art. Typical functionality of the 8051 microcontroller includes a central processing unit with a Boolean processor optimized for one-bit operations, five or six interrupts, with two external and two priority levels, two or three timers or counters, often 16-bit, a programmable full-duplex serial port with data rate defined by one of the timers, 32 I/O lines often as four 8-bit ports, RAM, and optional ROM. The 8051 microcontroller is known to exist in a multitude of varieties, each variation being embraced herein. Other microcontroller and microprocessor designs are also contemplated as the MC 320.

FIG. 5 illustrates the RTC battery well 225 of the ASF south bridge 212, according to the present invention. In addition to SB RAM 226, divided into CMOS RAM 226A and RTC RAM 226B, the RTC battery well 225 includes a

13

clock circuit 228, a status register 250, and an enable register 252. The RTC RAM 226B includes checksum data 227 and clock data 229. The battery 213 is coupled to provide power to the contents of the RTC battery well 225. The status register 250 is configured to store status information for the ASF capabilities of the computer system 200. The enable register 252 is configured to store a master bit that, when set, indicates that the ASF NIC 109 is not present. A slave bit may alternatively be stored that, when set, indicates that the ASF NIC 109 is present. It is noted that ASF registers 250 and 252 shown in FIG. 5 may each separately include one or more storage locations or a plurality of registers each having one or more storage locations.

The ASF south bridge 212 also includes, outside the RTC battery well 225, a CPU interface 232, power and system management units 233, and various bus interface logic circuits 234. Time and date data from the clock circuit 228 are stored as the clock data 229 in the RTC RAM 226B. The checksum data 227 in the RTC RAM 226B may be calculated based on the CMOS RAM 226A data and stored by the BIOS code during the boot process. The CPU interface 232 may include interrupt signal controllers and processor signal controllers. The power and system management units 233 may include an ACPI controller.

FIG. 6 illustrates a flowchart of an embodiment of a method of initializing a computer system including the ASF south bridge. Various steps shown in FIG. 2 that are not shown or replaced in FIG. 6 are also contemplated as included in FIG. 6.

During initialization, the processor 202 reads the default jump location. The default jump location in memory is usually at a location such as FFFF0h. The processor 202 performs a jump to the appropriate BIOS code location (e.g. FFFF0h) in the ROM BIOS 222, copies the BIOS code to the RAM memory 206, and begins processing the BIOS code instructions from the RAM memory 206, in block 405. Processing the BIOS code instructions includes checking for the presence of an ASF NIC 109.

If the ASF NIC 109 is present, in decision block 410, then the method continues with block 415. If the ASF NIC 109 is not present, in decision block 410, then the method continues with block 420.

If the ASF NIC 109 is present, then the ASF south bridge 212 is configured as a slave to the ASF NIC 109, in block 415. If the ASF NIC 109 is not present, then the ASF south bridge 212 is configured as a master ASF device, in block 420. Blocks 415 and 420 are each followed by block 425.

The BIOS code, processed by the processor 202, performs a power-on self test (POST), in block 425. The BIOS code next looks for additional BIOS code, such as from a video controller, IDE controller, SCSI controller, etc. and displays a start-up information screen, in block 430. The BIOS code may perform additional system tests, such as a RAM memory count-up test, and a system inventory, including identifying COM (serial) and LPT (parallel) ports, in block 435. The BIOS code also identifies plug-and-play devices and other similar devices and then displays a summary screen of devices identified, in block 440. The BIOS code identifies the boot location, and the corresponding boot sector, in block 445.

Configuring the ASF south bridge 212 as a slave to the ASF NIC 109, in block 415, may include setting a bit indicating the slave condition in the ASF enable register 252. Configuring the ASF south bridge 212 as the ASF master, in block 420, may include setting a bit indicating the master condition in the ASF enable register 252.

14

FIG. 7A illustrates a flowchart of an embodiment of a method 500 for operating a computer system including the ASF south bridge 212 in slave mode, according to one aspect of the present invention. In slave mode, the ASF south bridge 212 responds to reads of internal sensor status by the ASF NIC 109, in block 505. The ASF south bridge 212 in slave mode responds to SMBus 215 polls originating on the ASF NIC 109, in block 510. The ASF south bridge 212 in slave mode also provides control points for the ASF NIC 109, allowing the ASF NIC 109 to reset the computer system 200 and cycle the power to the computer system 200.

FIG. 7B illustrates a flowchart of an embodiment of a method 600 for operating a computer system including the ASF south bridge 212 in master mode, according to one aspect of the present invention. In master mode, the ASF south bridge 212 actively polls external sensors coupled to the SMBus 215 at a programmable polling rate, in block 605. The ASF south bridge 212 in master mode actively polls or otherwise monitors internal sensor states, in block 610. The ASF south bridge 212 in master mode may generate interrupts and/or respond to interrupts, in block 615. Resulting external sensor status values are combined with internally monitored sensor values and reported to the remote management server 90 via the Ethernet core 344 in the ASF south bridge 212, in block 620.

FIG. 8A illustrates a flowchart of an embodiment of a method 700A for determining system state upon an expiration of a watchdog timer 310, according to one aspect of the present invention. The method 700A includes the computer system 200 entering a new state, in block 710. Examples of the new state include booting, rebooting, entering or exiting SMM, etc. In one embodiment, the new state includes various BIOS states during booting. Other examples may include ASF states or conditions and/or ACPI states or conditions. Additional states may be predefined for a given implementation. The computer system 200 resets the watchdog timer 310, in block 720. Resetting the watchdog timer 310 may include zeroing, setting to a predetermined value, or setting to a random value within a predetermined range. Note that resetting the watchdog timer 310, in block 720, may occur in response to the system entering the new state, in block 710.

The method 700A determines if the watchdog timer 310 has expired, decision block 730. In other embodiments, the method determines if the watchdog timer 310 has reached a predetermined value other than zero. If the watchdog timer 310 has not expired, in decision block 730, then the method 700A rechecks if the watchdog timer 310 has expired, in decision block 730. If the watchdog timer 310 has expired, in decision block 730, then the method 700A notifies the microcontroller 320 that the watchdog timer 310 has expired, in block 740. Note that the method 700A may also check for a new system state, as in block 710, concurrently with blocks 730 or 740.

The method 700A next evaluates the current system state, in block 750. An evaluation of the current system state may, for example, include determining a current processor state, a current memory state, a current I/O state, and/or entering or exit SMM. The method 700A determines if there is a system error, in decision block 760. The system errors may be predefined by the user or by a standards document, including the ACPI and/or ASF specifications. If there are no system errors, in decision block 760, then the method 700A returns to the system resetting the watchdog timer 310, in block 720. If there are one or more system errors, in decision block 760, then the microcontroller 320 responds to at least one of the system errors, in block 770. The microcontroller

15

320 may respond to the system error in a predetermined fashion as determined by the configuration of the computer system **200**.

FIG. **8B** illustrates a flowchart of an embodiment of a method **700B** for determining system state upon an expiration of a watchdog timer **310**, according to one aspect of the present invention. The method **700B** includes updating a status register, in block **715**. The status register may include any one of the various registers described herein or generally available. For example, the status register may include an entry in the south bridge register **304**, the ASF configuration register **308**, the CPU-MC data exchange register **314**, or the ASF status register **318**. In a preferred embodiment, the status register is comprised within the ASF south bridge **212**, but other locations within the computer system **200** are within the embodiments contemplated herein, such as with the processor **202** or the north bridge **204**. In various embodiments, updating the status register may occur in response to any or all of the new system states described above with respect to block **710**. The method **700B** resets the watchdog timer **310**, in block **720**. Note that resetting the watchdog timer **310**, in block **720**, may occur in response to updating the status register, in block **715**.

The method **700B** determines if the watchdog timer **310** has expired, decision block **730**. If the watchdog timer **310** has not expired, in decision block **730**, then the method **700B** again checks if the watchdog timer **310** has expired, in decision block **730**. If the watchdog timer **310** has expired, in decision block **730**, then the method **700B** notifies the microcontroller **320** that the watchdog timer **310** has expired, in block **740**.

The method **700B** next includes the microcontroller **320** reading the contents of the status register, in block **755**. The method **700B** determines if there is a system error, in decision block **760**. If there are no system errors, in decision block **760**, then the method **700B** returns to the resetting the watchdog timer **310**, in block **720**. If there are system errors, in decision block **760**, then the microcontroller **320** notifies a remote management console of the system error over the network, in block **775**. Access to the network may be through the NIC **109** or through the Ethernet **344** in the ASF south bridge **212**. Note that portions of methods **700A** and **700B** shown in FIGS. **8A** and **8B** may be combined in certain embodiments.

FIG. **9** illustrates a flowchart of an embodiment of a method **800** for evaluating requests for system resets, according to one aspect of the present invention. The method **800** includes receiving a request for a system reset, in block **810**. The method **800** checks the watchdog timer **310** for expiration, in block **820**.

If the method **800** determines that the watchdog timer **310** has not expired, in decision block **830**, then the method **800** aborts the system reset requested in block **810**. If the method **800** determines that the watchdog timer **310** has expired, in decision block **830**, then the method **800** performs, or allows to be performed, the system reset requested in block **810**.

FIGS. **10** and **11** illustrate embodiments of functional parts of the ASF south bridge, according to various aspects of the present invention. In FIG. **10**, an embodiment of the RMCP set command unit **336** is shown. The RMCP set command unit **336** may be configured to perform RMCP commands received from the remote management server **90**. The RMCP set command unit **336** may be configured to translate RMCP commands received from the remote management server **90** into another form for the microcontroller **320**.

16

In the illustrated embodiment shown in FIG. **10**, one embodiment of the RMCP command set unit **336** includes a watchdog timer check entry **910** and a lock entry **915**. The watchdog timer check entry **910** may include computer code and/or hardware configured to perform a method identical to or similar in function to the method **800** shown in FIG. **9**. The lock entry **915** is configured to store an indication used in determining if the watchdog timer check entry **910** function or functions are performed. In other embodiments, other logic or logic-including devices within the computer system **200**, including but not limited to the microprocessor **320**, the processor **202**, and the crypto-processor **224**, may include the watchdog timer check entry **910** and/or the lock entry **915**.

In the illustrated embodiment shown in FIG. **11**, one embodiment of the ASF configuration register **308** includes a lock register command entry **1010**. The lock register command entry **1010** may include computer code and/or hardware configured to set or reset the lock entry **915** shown in FIG. **10**. In other embodiments, other storage locations, either independently as in one or more registers or included in other devices as in a memory, may store the lock register command entry **1010**. Additional contemplated locations for the lock register command entry **1010** include, but are not limited to, the RMCP command set unit **336**, the processor **202**, the crypto-processor **224**, and SMM space in the memory **206** and/or the extended BIOS **222**.

FIG. **12** illustrates a flowchart of an embodiment of a method **1100** for verifying RMCP requests, according to one aspect of the present invention. The method **1100** includes receiving an RMCP request, in block **1110**. The RMCP request may include any request defined by the version of the RMCP protocol implemented in the computer system **200**. The RMCP request may also include a fake or "spoofed" request issued by an unauthorized requester. The method **1100** initiates a security timer, in block **1120**. The security timer may include the watchdog timer **310**. In various embodiments, the security timer is set to expire after a predetermined interval. In one embodiment, the predetermined interval is one second. In another embodiment, the predetermined interval includes a positive uncertainty of one second and a negative uncertainty of zero seconds. Thus, while the response interval may include an additional one second positive uncertainty, allowing for a response within two seconds, a faster response time (i.e., less than the one second less the zero negative uncertainty) may correspond to a false or "spoofed" authorization.

The method **1100** includes generating an SMI request for authorization to perform the RMCP request, in block **1130**. The SMI request may include generating an SMI interrupt using the SMI request register **306**. The SMM code performed in SMM in response to the SMI request in block **1130** is configured to validate the RMCP request. The validation of the RMCP request may be implemented in a variety of ways as desired. The implementation of the RMCP validation may require modifying the predetermined interval for the security timer in block **1120**.

The method **1100** includes evaluating the result of the RMCP validation request made through the SMI request in light of the time remaining on the security timer, in block **1140**. In one embodiment, for the SMI request for authorization to perform the RMCP request to be affirmative, the affirmative reply must be received before the expiration of the security timer. In another embodiment, the expiration of the security timer before receiving the affirmative reply from the SMI request for authorization to perform the RMCP request may be interpreted as requiring a resending of the

SMI request for authorization to perform the RMCP request. In still another embodiment, the expiration of the security timer represents an affirmative authorization. An affirmative reply to the SMI request before the expiration of the security timer also represents an affirmative authorization. Any other reply to the SMI request before the expiration of the security timer may be interpreted as a failure to obtain authorization. Other interpretations are also contemplated. Note that in a given implementation, the security conditions may reverse the logic needed to evaluate the result of the SMI request.

The method 1100 also includes determining if the security requirements for the SMI request are met, in decision block 1150. If the method 1100 determines that the security requirements have not been met, in decision block 1150, then the method 1100 aborts the RMCP request in block 1160. If the method 1100 determines that the security requirements have been met, in decision block 1150, then the method 1100 performs, or allows to be performed, the RMCP request, in block 1170.

The security requirements may allow the computer system 200 to distinguish between a valid RMCP request and the fake or "spoofed" request issued by the unauthorized requester. Note that aborting the RMCP request in block 1160 may include issuing a rejection or refusal to the requester. In other embodiments, the RMCP request may be simply ignored.

As an example, consider the following embodiment. An RMCP request for a system reset is received in block 1110. The security timer is initiated in block 1120. The SMI request is generated in block 1130. If no response to the SMI request is received by the expiration of the security timer, the operating system may be hung; making the system reset an acceptable action. If the operating system is not hung, then the system reset would not be an acceptable action unless express authorization is granted by the operating system. Thus, the security requirements will be met in decision block 1150 by the expiration of the security timer or by a positive authorization.

For the purposes of this disclosure, references to ROM are to be construed as also applying to flash memory and other non-volatile memory types, whether electrical, semiconductor, or optical. Note that while the methods of the present invention disclosed herein have been illustrated as flowcharts, various elements of the flowcharts may be omitted or performed in different order in various embodiments. Note also that the methods of the present invention disclosed herein admit to variations in implementation.

Some aspects of the invention as disclosed above may be implemented in hardware or software. Thus, some portions of the detailed descriptions herein are consequently presented in terms of a hardware implemented process and some portions of the detailed descriptions herein are consequently presented in terms of a software-implemented process involving symbolic representations of operations on data bits within a memory of a computing system or computing device. These descriptions and representations are the means used by those in the art to convey most effectively the substance of their work to others skilled in the art using both hardware and software. The process and operation of both require physical manipulations of physical quantities. In software, usually, though not necessarily, these quantities take the form of electrical, magnetic, or optical signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated or otherwise as may be apparent, throughout the present disclosure, these descriptions refer to the action and processes of an electronic device, that manipulates and transforms data represented as physical (electronic, magnetic, or optical) quantities within some electronic device's storage into other data similarly represented as physical quantities within the storage, or in transmission or display devices. Exemplary of the terms denoting such a description are, without limitation, the terms "processing," "computing," "calculating," "determining," "displaying," and the like.

Note also that the software-implemented aspects of the invention are typically encoded on some form of program storage medium or implemented over some type of transmission medium. The program storage medium may be magnetic (e.g., a floppy disk or a hard drive) or optical (e.g., a compact disk read only memory, or "CD ROM"), and may be read only or random access. Similarly, the transmission medium may be twisted wire pairs, coaxial cable, optical fiber, or some other suitable transmission medium known to the art. The invention is not limited by these aspects of any given implementation.

The particular embodiments disclosed above are illustrative only, as the invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is therefore evident that the particular embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the invention. Accordingly, the protection sought herein is as set forth in the claims below.

What is claimed is:

1. A method of operating a computer system, the method comprising:

receiving a request for a system action;
initiating a timer;
generating an authorization request for the system action;
evaluating a result of the authorization request for the system action if received before an expiration of the timer; and
granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

2. The method of claim 1, wherein receiving the request for the system action comprises receiving a remote management and control protocol (RMCP) request for the system action.

3. The method of claim 2, wherein receiving the RMCP request for the system action comprises receiving one of a system reset, a system boot, or a system reboot.

4. The method of claim 1, wherein initiating the timer comprises initiating a watchdog timer.

5. The method of claim 1, wherein generating the authorization request for the system action comprises generating an SMI request.

6. The method of claim 5, wherein generating the SMI request comprises requesting the authorization request for the system action inside SMM.

7. The method of claim 1, initiating the timer comprises initializing the timer for approximately two seconds, wherein the expiration of the timer comprises the approximately two seconds.

19

8. A method of operating a computer system, the method comprising the steps of:

receiving a request for a system action;
initiating a timer;
generating an authorization request for the system action;
evaluating a result of the authorization request for the system action if received before an expiration of the timer; and

granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

9. The method of claim 8, wherein the step of receiving the request for the system action comprises the step of receiving a remote management and control protocol (RMCP) request for the system action.

10. The method of claim 9, wherein the step of receiving the RMCP request for the system action comprises the step of receiving one of a system reset, a system boot, or a system reboot.

11. The method of claim 8, wherein the step of initiating the timer comprises the step of initiating a watchdog timer.

12. The method of claim 8, wherein the step of generating the authorization request for the system action comprises the step of generating an SMI request.

13. The method of claim 12, wherein the step of generating the SMI request comprises the step of requesting the authorization request for the system action inside SMM.

14. The method of claim 8, wherein the step of initiating the timer comprises the step of initializing the timer for approximately two seconds, wherein the expiration of the timer comprises the approximately two seconds.

15. A computer readable medium encoded with instructions that, when executed by a computer system, performs a method for operating the computer system, the method comprising:

receiving a request for a system action;
initiating a timer;
generating an authorization request for the system action;
evaluating a result of the authorization request for the system action if received before an expiration of the timer; and

granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

16. The computer readable medium of claim 15, wherein receiving the request for the system action comprises receiving a remote management and control protocol (RMCP) request for the system action.

17. The computer readable medium of claim 16, wherein receiving the RMCP request for the system action comprises receiving one of a system reset, a system boot, or a system reboot.

20

18. The computer readable medium of claim 15, wherein initiating the timer comprises initiating a watchdog timer.

19. The computer readable medium of claim 15, wherein generating the authorization request for the system action comprises generating an SMI request.

20. The computer readable medium of claim 19, wherein generating the SMI request comprises requesting the authorization request for the system action inside SMM.

21. The computer readable medium of claim 15, wherein initiating the timer comprises initializing the timer for approximately two seconds, wherein the expiration of the timer comprises the approximately two seconds.

22. A computer system, comprising:

means for receiving a request for a system action;

means for initiating a timer;

means for generating an authorization request for the system action;

means for evaluating a result of the authorization request for the system action if received before an expiration of the timer; and

means for granting the request for the system action if the expiration of the timer occurs before the result of the authorization request for the system action is received.

23. The computer system of claim 22, wherein the means for receiving the request for the system action comprises means for receiving a remote management and control protocol (RMCP) request for the system action.

24. The computer system of claim 23, wherein the means for receiving the RMCP request for the system action comprises means for receiving one of a system reset, a system boot, or a system reboot.

25. The computer system of claim 22, wherein the means for initiating the timer comprises means for initiating a watchdog timer.

26. The computer system of claim 22, wherein the means for generating the authorization request for the system action comprises means for generating an SMI request.

27. The computer system of claim 26, wherein means for generating the SMI request comprises means for requesting the authorization request for the system action inside SMM.

28. The computer system of claim 22, the means for initiating the timer comprises means for initializing the timer for approximately two seconds, wherein the expiration of the timer comprises the approximately two seconds.

* * * * *