



US010273604B2

(12) **United States Patent**
Meir

(10) **Patent No.:** **US 10,273,604 B2**
(45) **Date of Patent:** **Apr. 30, 2019**

(54) **ARTICLE OF FOOTWEAR
INCORPORATING A KNITTED
COMPONENT**

(71) Applicant: **NIKE, Inc.**, Beaverton, OR (US)

(72) Inventor: **Adrian Meir**, Portland, OR (US)

(73) Assignee: **NIKE, Inc.**, Beaverton, OR (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 332 days.

(21) Appl. No.: **15/225,516**

(22) Filed: **Aug. 1, 2016**

(65) **Prior Publication Data**

US 2016/0340812 A1 Nov. 24, 2016

Related U.S. Application Data

(60) Continuation of application No. 14/686,975, filed on Apr. 15, 2015, now Pat. No. 9,404,205, which is a division of application No. 14/535,413, filed on Nov. 7, 2014, now Pat. No. 9,375,046.

(60) Provisional application No. 62/057,264, filed on Sep. 30, 2014.

(51) **Int. Cl.**
D04B 1/22 (2006.01)
A43B 1/04 (2006.01)
A43B 23/02 (2006.01)
D04B 1/12 (2006.01)

(52) **U.S. Cl.**
CPC **D04B 1/225** (2013.01); **A43B 1/04** (2013.01); **A43B 23/0205** (2013.01); **A43B 23/027** (2013.01); **A43B 23/0245** (2013.01); **D04B 1/123** (2013.01); **D04B 1/22** (2013.01); **D10B 2403/0113** (2013.01); **D10B 2403/0241** (2013.01); **D10B 2403/032** (2013.01); **D10B 2501/043** (2013.01)

(58) **Field of Classification Search**

CPC ... A43B 1/04; D04B 1/22; D04B 1/24; D04B 1/225; D04B 7/14; D04B 7/30
USPC 66/169 R, 170, 171, 177; 36/45, 47, 48
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

601,192 A 3/1898 Woodside
1,215,198 A 2/1917 Rothstein
1,597,934 A 8/1926 Stimpson
(Continued)

FOREIGN PATENT DOCUMENTS

CN 202536202 U 11/2012
CN 202950101 U 5/2013
(Continued)

OTHER PUBLICATIONS

Office Action, and English language translation thereof, in corresponding Chinese Application No. 201510191848.1, dated Aug. 29, 2017, 14 pages.

(Continued)


Primary Examiner — Danny Worrell

(74) *Attorney, Agent, or Firm* — Brinks Gilson & Lione

(57) **ABSTRACT**

The present disclosure provides an article. The article may include a first tubular rib structure and a second tubular rib structure. A webbed area may be located between the first tubular rib structure and the second tubular rib structure. The webbed area may have a first portion with a first width and a second portion with a second width, where the first width may be larger than the second width. The webbed area may be at least partially formed from a first yarn.

20 Claims, 26 Drawing Sheets

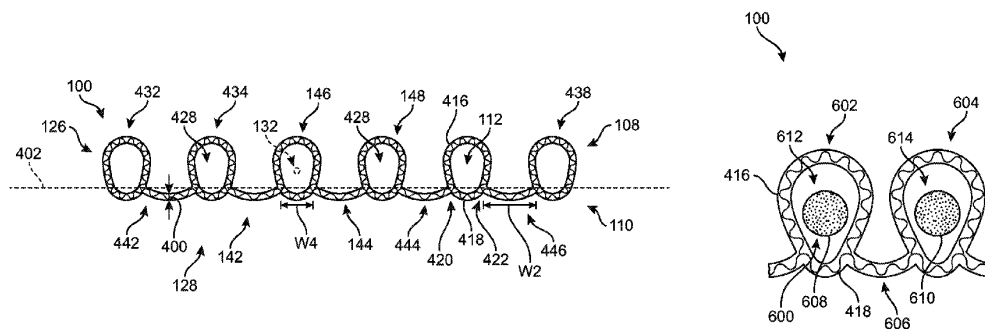

US 10,273,604 B2

Page 2

(56)

References Cited

U.S. PATENT DOCUMENTS

1,888,172 A	11/1932	Joha	6,170,175 B1	1/2001	Funk
1,902,780 A	3/1933	Holden et al.	6,308,438 B1	10/2001	Throneburg et al.
1,910,251 A	5/1933	Joha	6,333,105 B1	12/2001	Tanaka et al.
2,001,293 A	5/1935	Wilson	6,397,638 B1	6/2002	Roell
2,047,724 A	7/1936	Zuckerman	6,401,364 B1	6/2002	Burt
2,147,197 A	2/1939	Glidden	6,412,196 B1	7/2002	Gross
2,151,879 A	3/1939	Weber	6,558,784 B1	5/2003	Norton et al.
2,314,098 A	3/1943	McDonald	6,588,237 B2	7/2003	Cole et al.
2,330,199 A	9/1943	Basch	6,745,395 B2	6/2004	Noble
2,343,390 A	3/1944	Ushakoff	6,754,983 B2	6/2004	Hatfield et al.
2,400,692 A	5/1946	Herbert	6,829,912 B2	12/2004	Rempp et al.
2,440,393 A	4/1948	Clark	6,910,288 B2	6/2005	Dua
2,569,764 A	10/1951	Jonas	6,922,917 B2	8/2005	Kerns et al.
2,586,045 A	2/1952	Hoza	6,931,762 B1	8/2005	Dua
2,608,078 A	8/1952	Anderson	D517,297 S	3/2006	Jones et al.
2,641,004 A	6/1953	Whiting et al.	7,051,460 B2	5/2006	Orei et al.
2,675,631 A	4/1954	Doughty	7,056,402 B2	6/2006	Koerwien et al.
2,994,322 A	8/1961	Cullen et al.	7,155,846 B2	1/2007	Alfaro et al.
3,015,170 A	1/1962	Kramer	7,293,371 B2	11/2007	Aveni
3,016,631 A	1/1962	Servin	7,347,011 B2	3/2008	Dua et al.
3,307,379 A	3/1967	Woolley et al.	7,380,421 B1	6/2008	Liu
3,583,081 A	6/1971	Hayashi	7,441,348 B1	10/2008	Dawson
3,694,940 A	10/1972	Stohr	7,543,397 B2	6/2009	Kilgore et al.
3,704,474 A	12/1972	Winkler	7,568,298 B2	8/2009	Kerns
3,766,566 A	10/1973	Tadokoro	7,682,219 B2	3/2010	Falla
3,778,856 A	12/1973	Christie et al.	7,774,956 B2	8/2010	Dua et al.
3,952,427 A	4/1976	Von den Benken et al.	8,490,299 B2	7/2013	Dua et al.
3,972,086 A	8/1976	Belli et al.	8,522,577 B2	9/2013	Huffa
4,027,402 A	6/1977	Liu et al.	8,631,589 B2	1/2014	Dojan
4,031,586 A	6/1977	Von den Benken et al.	8,839,532 B2	9/2014	Huffa et al.
4,211,806 A	7/1980	Civardi et al.	9,027,260 B2	5/2015	Dua et al.
4,232,458 A	11/1980	Bartels	9,375,046 B2 *	6/2016	Meir A43B 1/04
4,255,949 A	3/1981	Thorneburg	9,404,205 B2 *	8/2016	Meir A43B 1/04
4,258,480 A	3/1981	Famolare, Jr.	9,681,704 B2	6/2017	Podhajny et al.
4,317,292 A	3/1982	Melton	2002/0078599 A1	6/2002	Delgorgue et al.
4,342,801 A	8/1982	Gerlach et al.	2002/0148258 A1	10/2002	Cole et al.
4,373,361 A	2/1983	Thorneburg	2003/0126762 A1	7/2003	Tseng
4,447,967 A	5/1984	Zaino	2003/0191427 A1	10/2003	Jay et al.
4,465,448 A	8/1984	Aldridge	2004/0118018 A1	6/2004	Dua
4,607,439 A	8/1986	Sogabe et al.	2004/0181972 A1	9/2004	Csorba
4,737,396 A	4/1988	Kamat	2005/0115284 A1	6/2005	Dua
4,750,339 A	6/1988	Simpson et al.	2005/0126042 A1	6/2005	Baier et al.
4,756,098 A	7/1988	Boggia	2005/0136768 A1	6/2005	Huang
4,785,558 A	11/1988	Shiomura	2005/0193592 A1	9/2005	Dua et al.
4,813,158 A	3/1989	Brown	2005/0268497 A1	12/2005	Alfaro et al.
5,031,423 A	7/1991	Ikenaga	2005/0273988 A1	12/2005	Christy
5,095,720 A	3/1992	Tibbals, Jr.	2005/0284000 A1	12/2005	Kerns
5,117,567 A	6/1992	Berger	2006/0059715 A1	3/2006	Aveni
5,118,569 A	6/1992	Kuroda et al.	2006/0162187 A1	7/2006	Byrnes et al.
5,152,025 A	10/1992	Hirmas	2007/0016999 A1	1/2007	Harber et al.
5,192,601 A	3/1993	Neisler	2007/0022627 A1	2/2007	Sokolowski et al.
5,291,671 A	3/1994	Caberlotto et al.	2007/0068047 A1	3/2007	Alfaro et al.
5,345,638 A	9/1994	Nishida	2007/0180730 A1	8/2007	Greene et al.
5,353,524 A	10/1994	Brier	2007/0294920 A1	12/2007	Baychar
5,356,701 A	10/1994	Wei et al.	2008/0017294 A1	1/2008	Bailey et al.
5,371,957 A	12/1994	Gaudio	2008/0078102 A1	4/2008	Kilgore et al.
5,419,161 A	5/1995	Bodenschatz et al.	2008/0110048 A1	5/2008	Dua et al.
5,461,884 A	10/1995	McCartney et al.	2008/0110049 A1	5/2008	Sokolowski et al.
5,511,323 A	4/1996	Dahlgren	2008/0189830 A1	8/2008	Egglesfield
5,572,860 A	11/1996	Mitsumoto et al.	2008/0313939 A1	12/2008	Ardill
5,575,090 A	11/1996	Condini	2009/0068908 A1	3/2009	Hinchcliff
5,623,840 A	4/1997	Roell	2010/0043253 A1	2/2010	Dojan et al.
5,729,918 A	3/1998	Smets	2010/0051132 A1	3/2010	Glenn
5,735,145 A	4/1998	Pernick	2010/0154256 A1	6/2010	Dua
5,746,013 A	5/1998	Fay, Sr.	2010/0170651 A1	7/2010	Scherb et al.
5,765,296 A	6/1998	Ludemann et al.	2010/0175276 A1	7/2010	Dojan et al.
5,884,419 A	3/1999	Davidowitz et al.	2010/0251491 A1	10/2010	Dojan et al.
5,890,381 A	4/1999	Leeke et al.	2010/0251564 A1	10/2010	Meschter
5,996,189 A	12/1999	Wang	2011/0030244 A1	2/2011	Motawi et al.
6,029,376 A	2/2000	Cass	2011/0041359 A1	2/2011	Dojan et al.
6,032,387 A	3/2000	Johnson	2011/0078921 A1	4/2011	Greene et al.
6,052,921 A	4/2000	Oreck	2011/0277352 A1	11/2011	Diepenbrock et al.
6,088,936 A	7/2000	Bahl	2012/0180340 A1	7/2012	Crowley et al.
6,112,437 A	9/2000	Lovitt	2012/0233882 A1	9/2012	Huffa et al.
6,151,802 A	11/2000	Reynolds	2012/0234052 A1	9/2012	Huffa et al.
			2012/0255201 A1	10/2012	Little
			2012/0284935 A1	11/2012	Dojan et al.
			2013/0019500 A1	1/2013	Greene
			2013/0318837 A1	12/2013	Dua et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2014/0068968	A1	3/2014	Podhajny et al.
2014/0196311	A1	7/2014	Follet et al.
2014/0196316	A1	7/2014	Follet
2014/0237861	A1	8/2014	Podhajny
2014/0245633	A1	9/2014	Podhajny

FOREIGN PATENT DOCUMENTS

CN	103844428	A	6/2014
CN	205030620	U	2/2016
DE	870963		3/1953
DE	1084173		6/1960
DE	19738433		4/1998
DE	19728848		1/1999
EP	0279950		8/1988
EP	372370		6/1990
EP	0448714		10/1991
EP	0728860		8/1996
EP	0758693		2/1997
EP	0898002		2/1999
EP	1233091		8/2002
EP	1437057		7/2004
EP	1563752		8/2005
EP	1602762		12/2005
EP	1972706		9/2008
EP	2716177		4/2014
FR	2171172		9/1973
FR	2571387		4/1986
GB	538865		8/1941
GB	1 461 928		1/1977
GB	2018837		10/1979
GB	1603487		11/1981
JP	H06113905		4/1994
JP	H08109553		4/1996
JP	H11302943		11/1999
NL	7304678		10/1974
WO	WO90/03744		4/1990
WO	WO00/32861		6/2000
WO	WO 02/04726	A1	1/2002
WO	WO02/31247		4/2002
WO	WO 2013/113339	A1	8/2013

OTHER PUBLICATIONS

Office Action, and English language translation thereof, in Chinese Application No. 201510192547.0, dated Sep. 1, 2017, 10 pages.

International Preliminary Report on Patentability in corresponding International Application No. PCT/US2015/052453, dated Apr. 13, 2017, 12 pages.

Declaration of Dr. Edward C. Frederick from the US Patent and Trademark Office Inter Partes Review of U.S. Pat. No. 7,347,011 (178 pp).

David J. Spencer, Knitting Technology: A Comprehensive Handbook and Practical Guide (Third ed., Woodhead Publishing Ltd. 2001) (413 pp).

Excerpt of Hannelore Eberle et al., Clothing Technology (Third English ed., Beuth-Verlag GmH 2002) (book cover and back; pp. 2-3, 83).

International Search Report and Written Opinion in connection with PCT/US2009/056795 dated Apr. 20, 2010.

International Search Report and Written Opinion in connection with PCT/US2012/028576 dated Oct. 1, 2012.

International Search Report and Written Opinion in connection with PCT/US2012/028559 dated Oct. 19, 2012.

International Search Report and Written Opinion in connection with PCT/US2012/028534 dated Oct. 17, 2012.

International Preliminary Report on Patentability in connection with PCT/US2012/028534 dated Sep. 17, 2013.

International Preliminary Report on Patentability in connection with PCT/US2012/028576 dated Sep. 17, 2013.

International Search Report and Written Opinion of the International Searching Authority dated Dec. 15, 2015 for PCT/US2015/052434 (13 pp.).

International Search Report and Written Opinion of the International Searching Authority dated Jan. 29, 2016 for PCT/US2015/052453 (15 pp.).



International Search Report and Written Opinion of the International Searching Authority dated Jan. 22, 2016 for PCT/US2015/052426 (13 pp.).

U.S. Appl. No. 14/535,413, filed Nov. 7, 2014.

Office Action, and English language translation thereof, in corresponding Chinese Application No. 201520827315.3, dated Mar. 1, 2016, 4 pages.

International Preliminary Report on Patentability in corresponding International Application No. PCT/US2015/052426, dated Apr. 4, 2017, 10 pages.

* cited by examiner

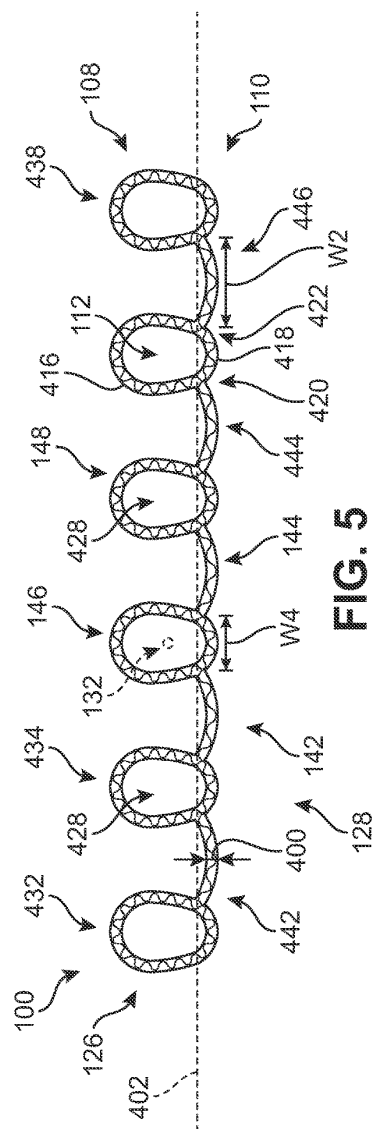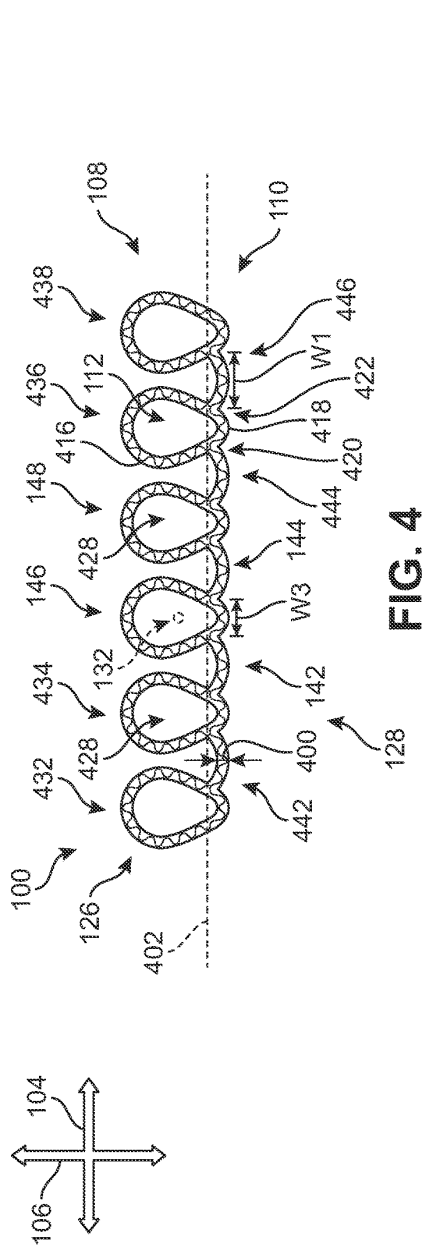

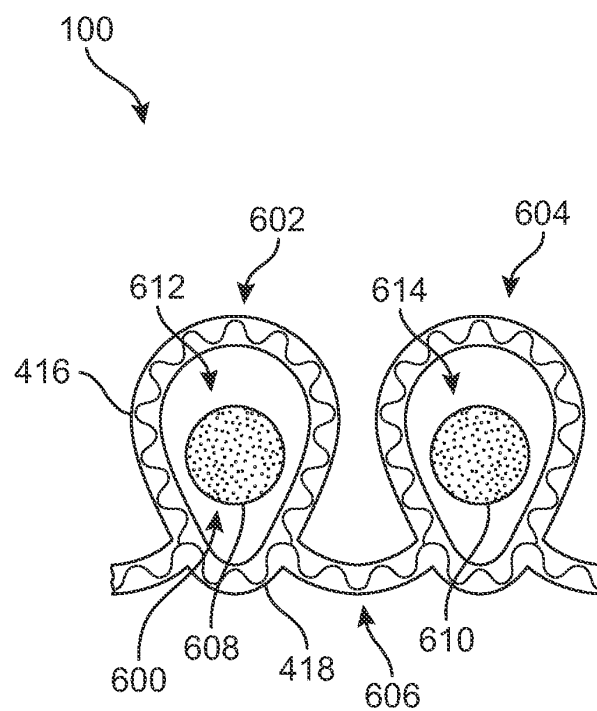
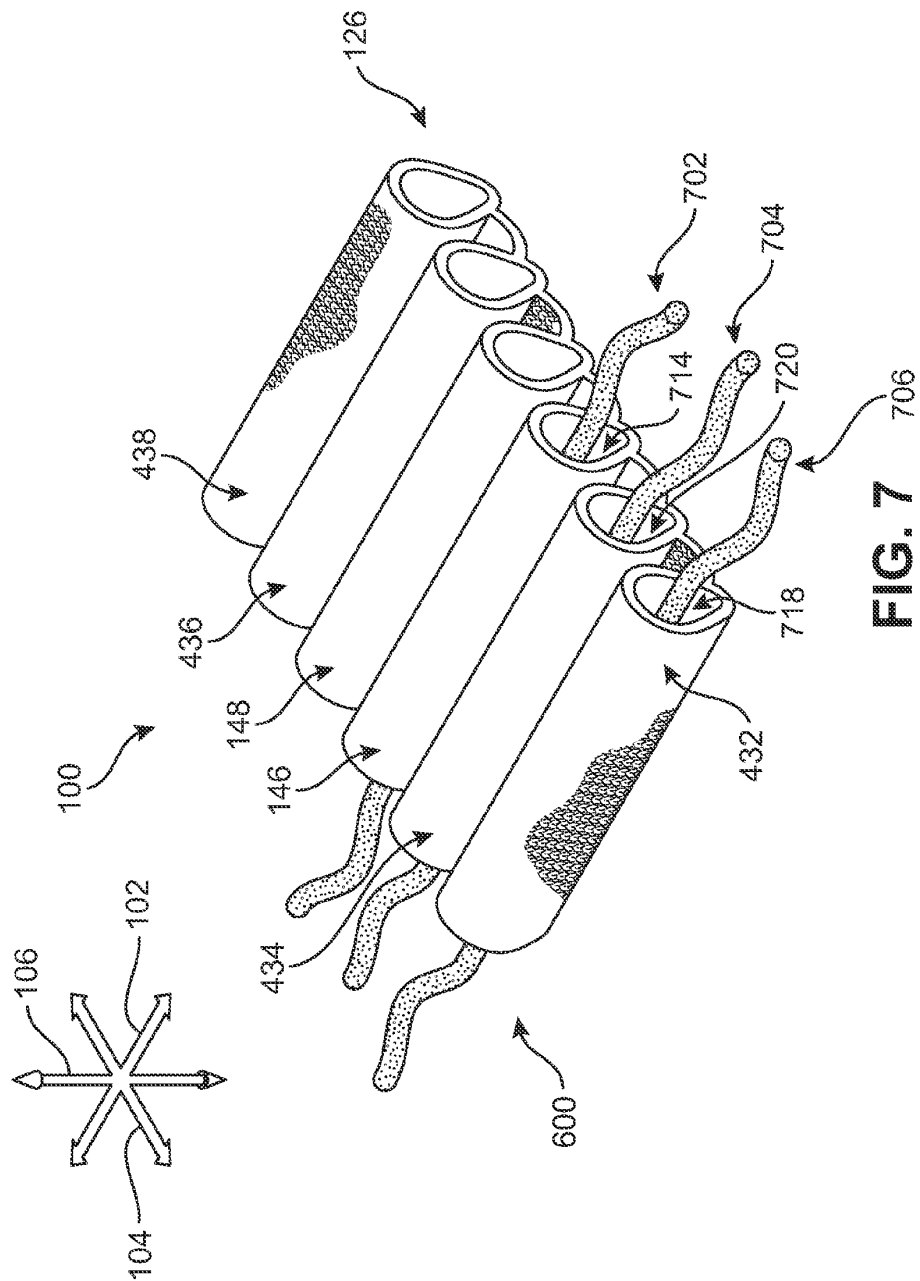


FIG. 6



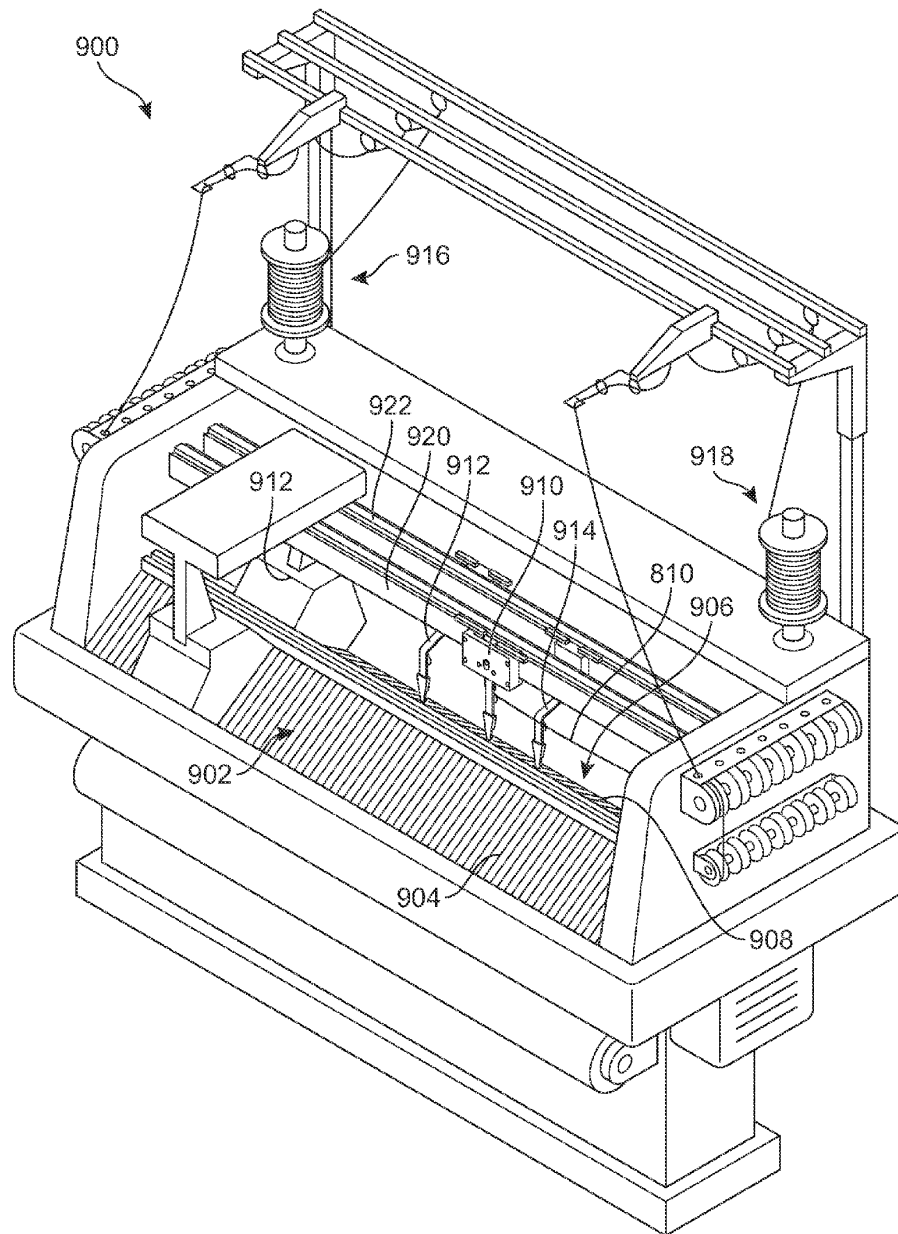


FIG. 9

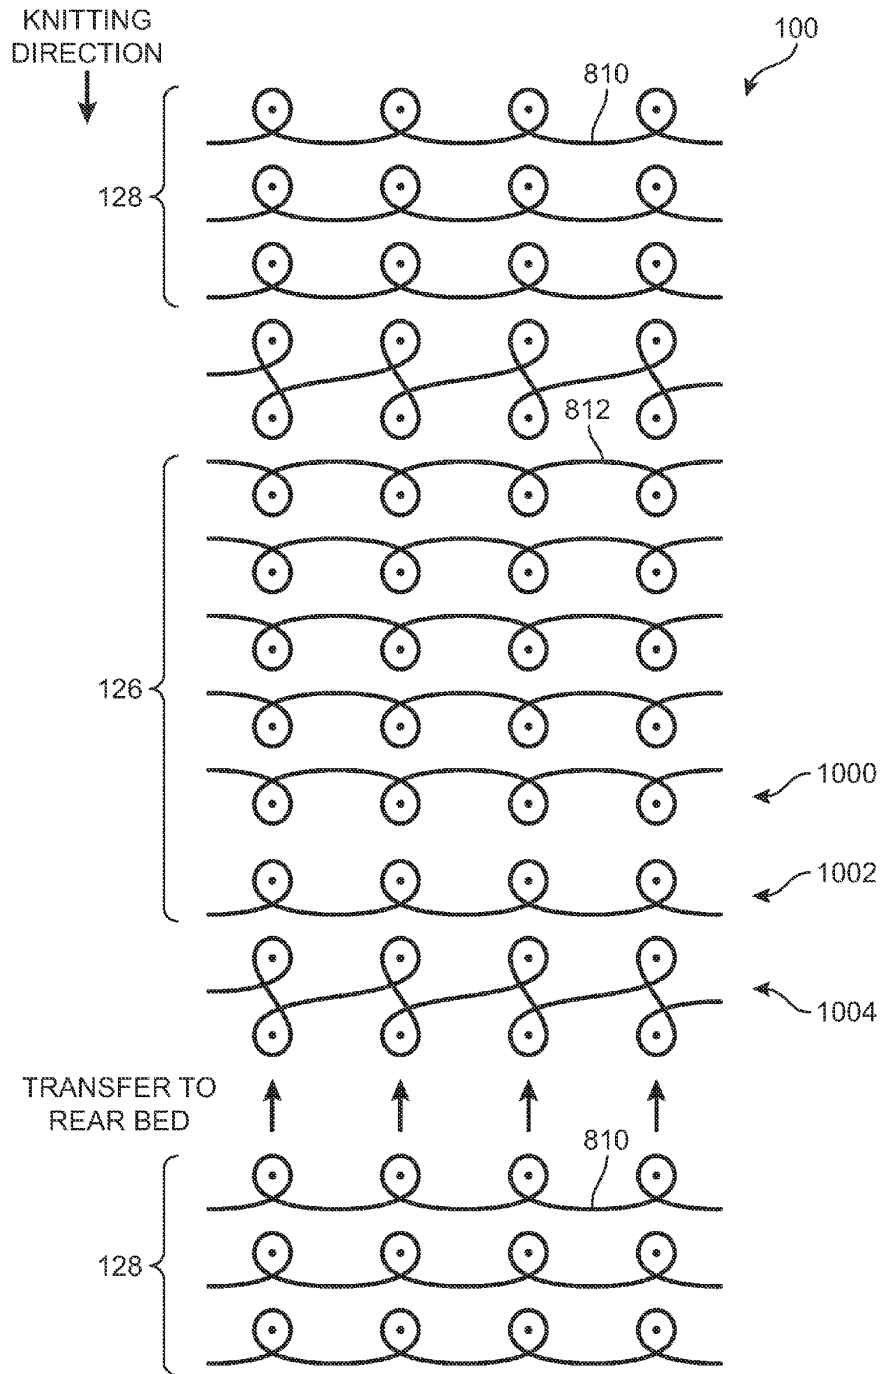


FIG. 10A

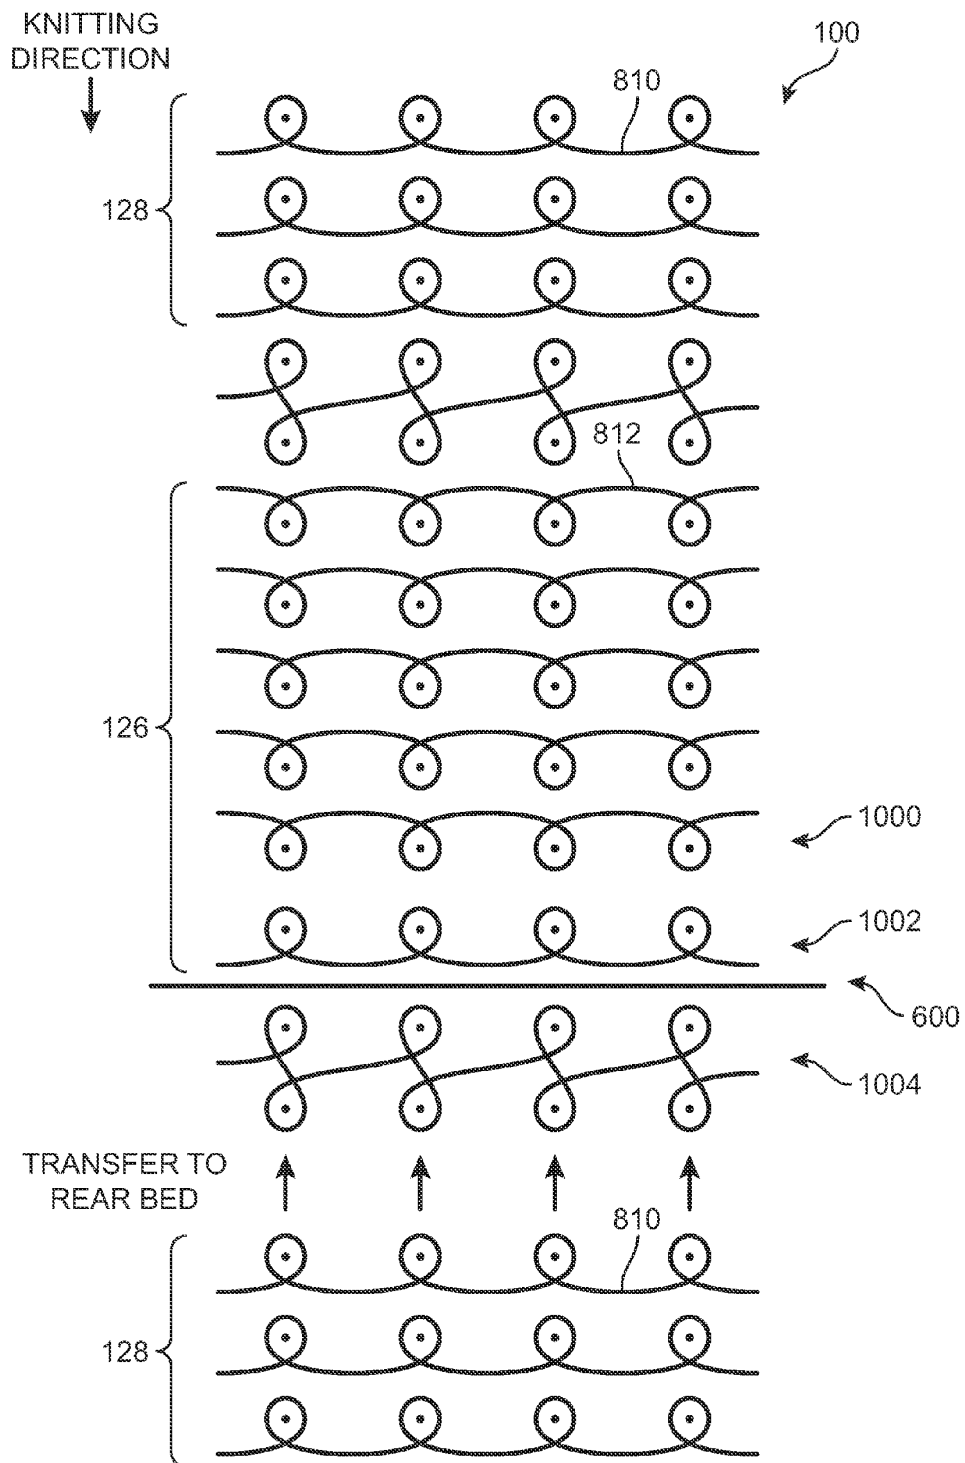
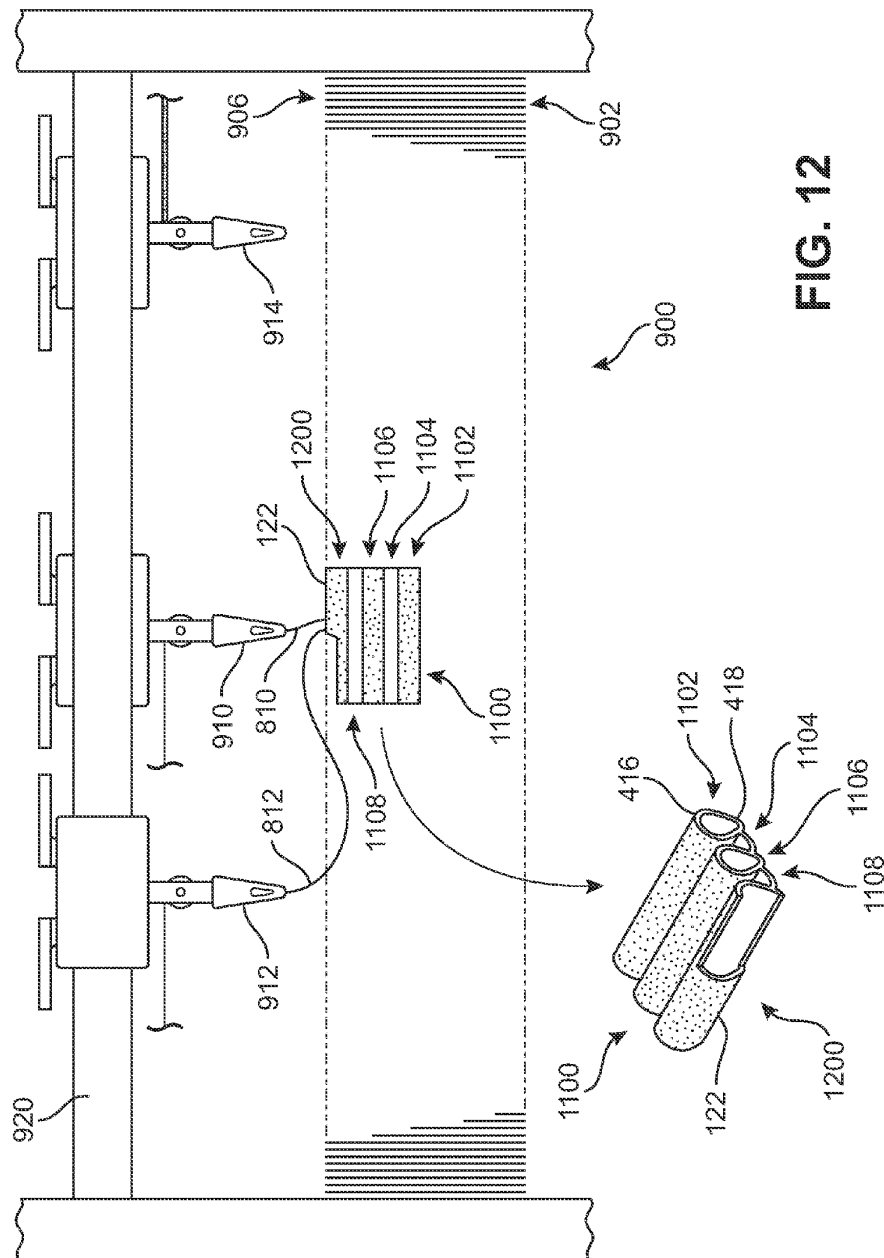


FIG. 10B



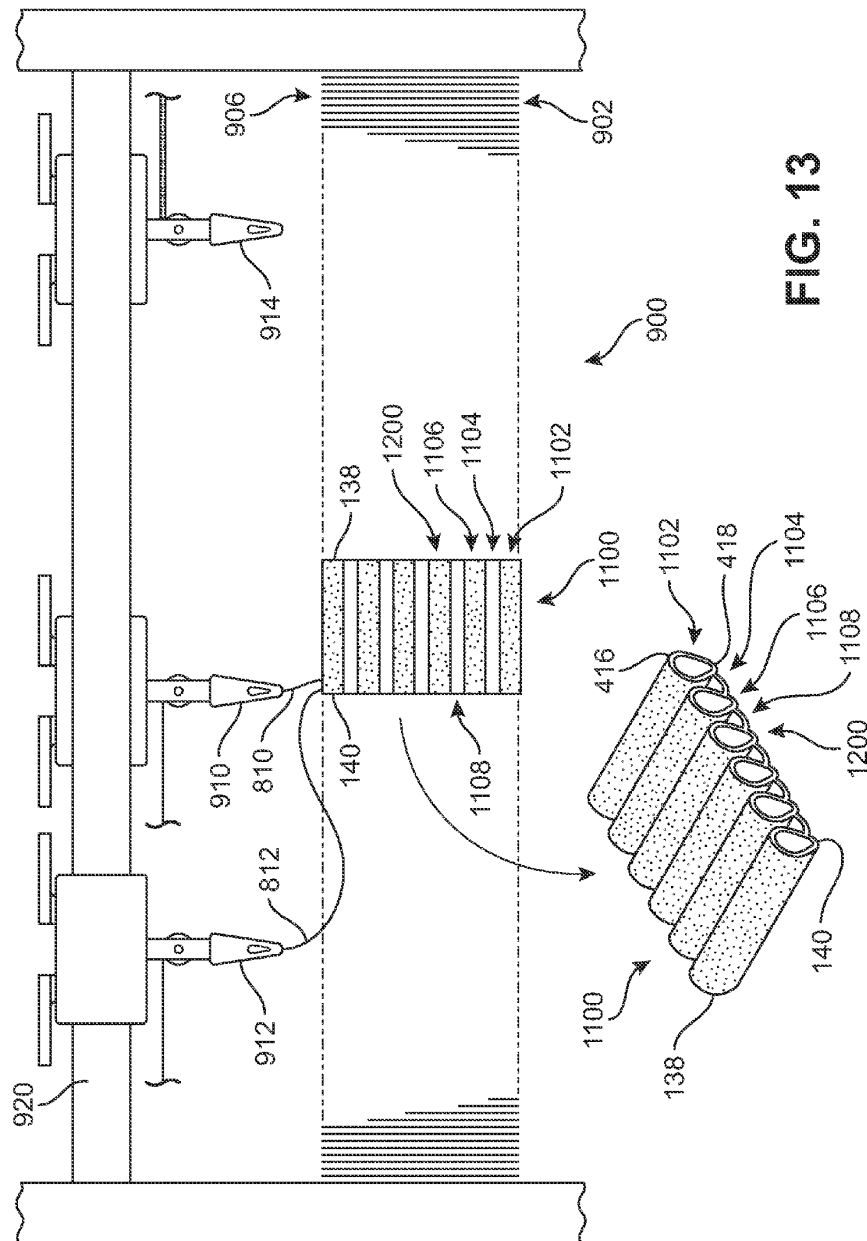
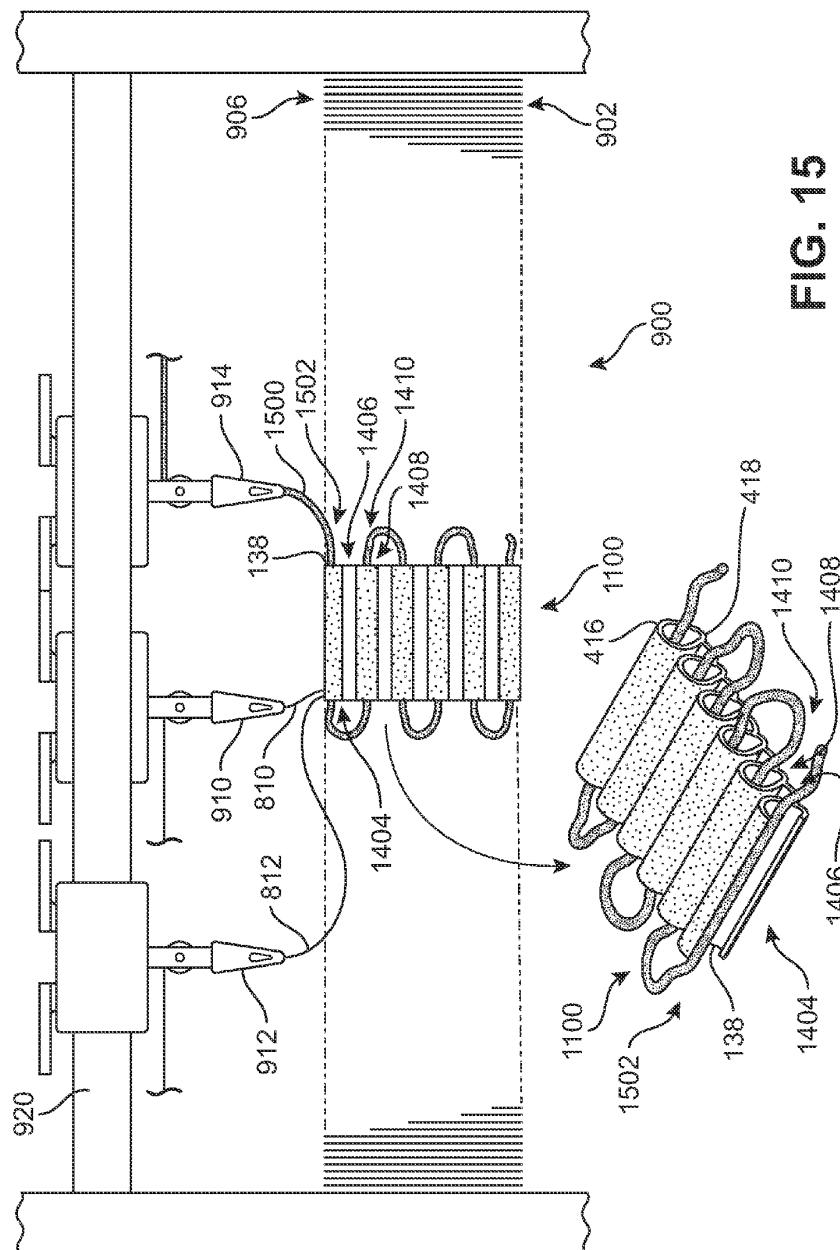


FIG. 13



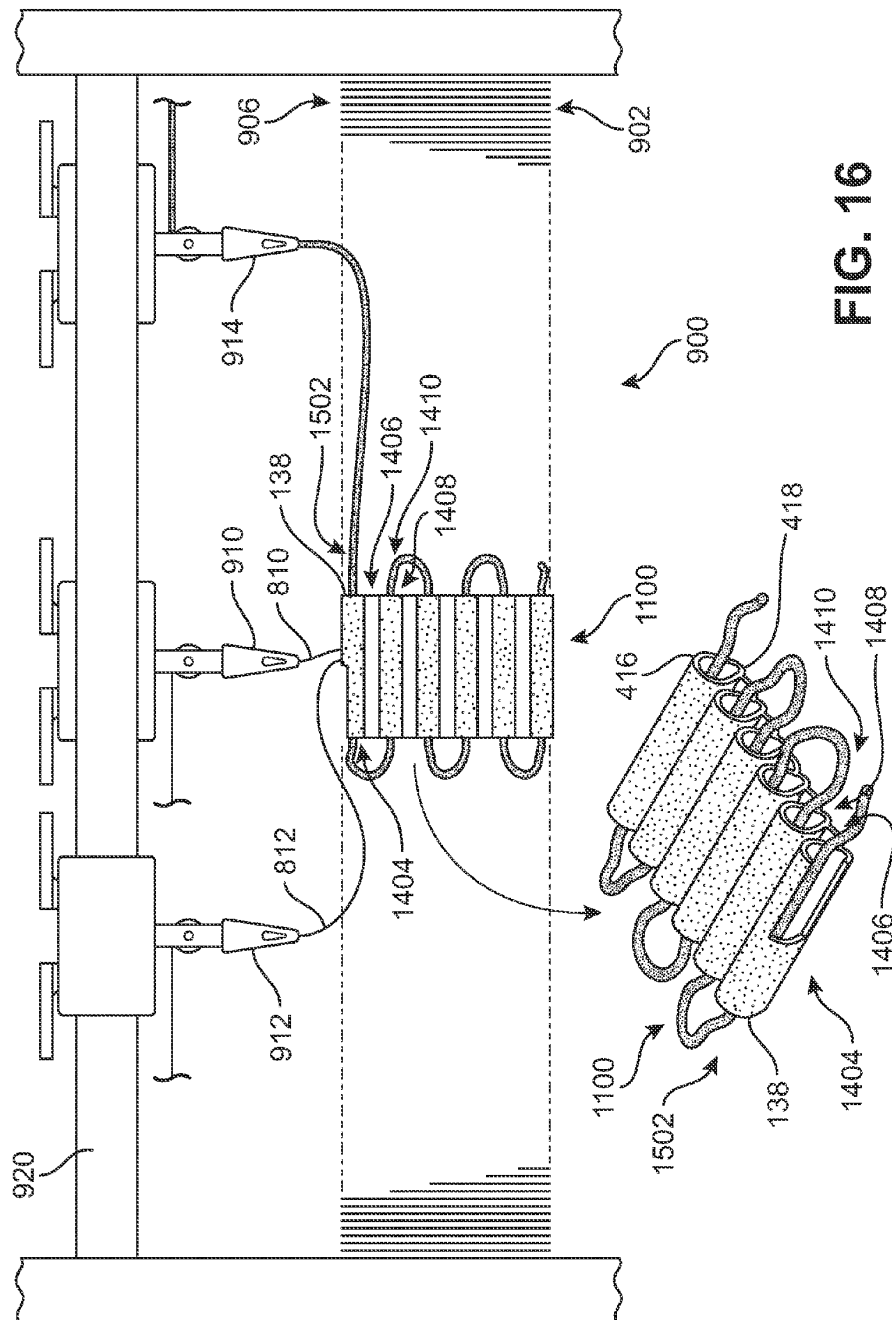
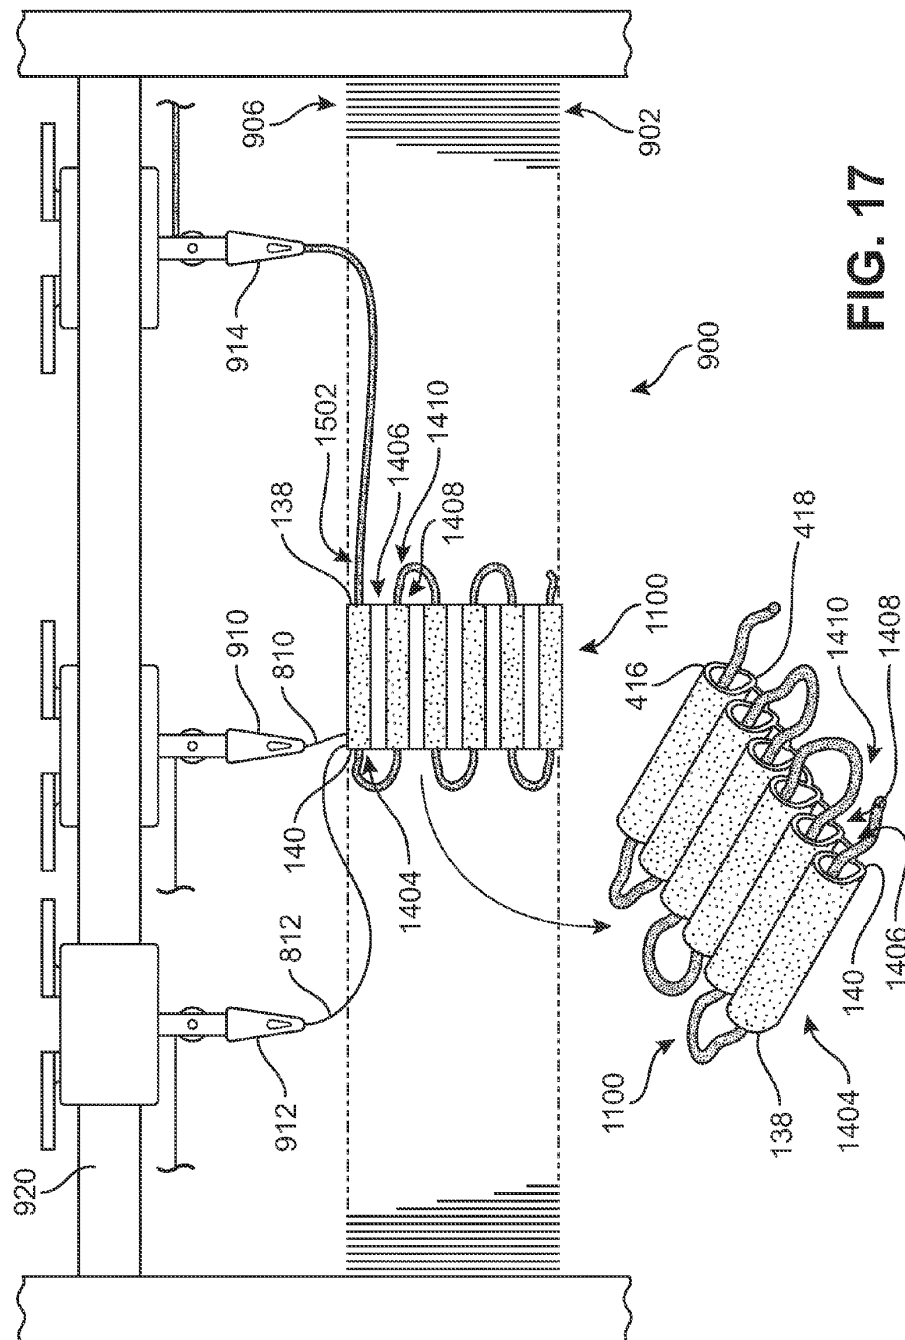


FIG. 16



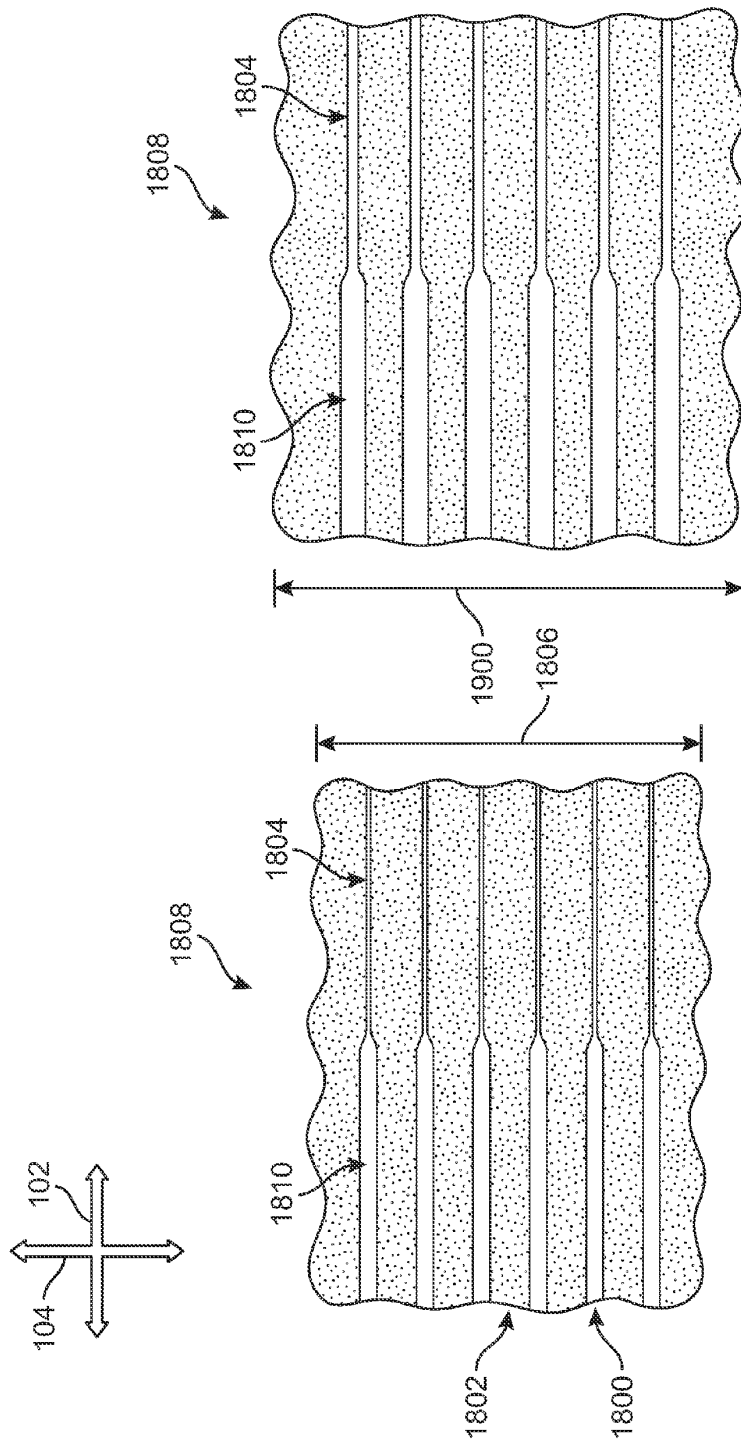
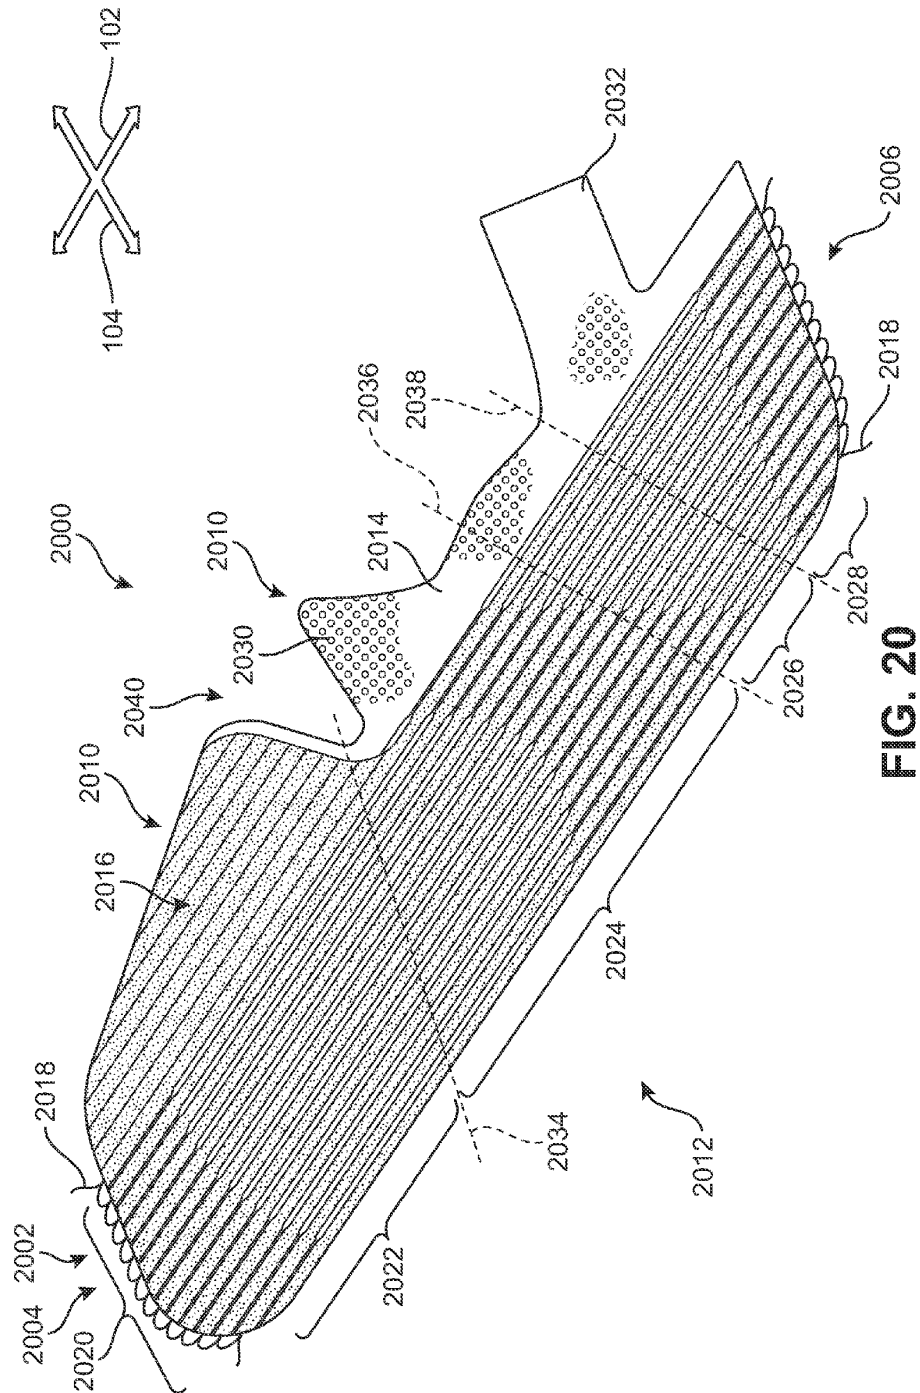
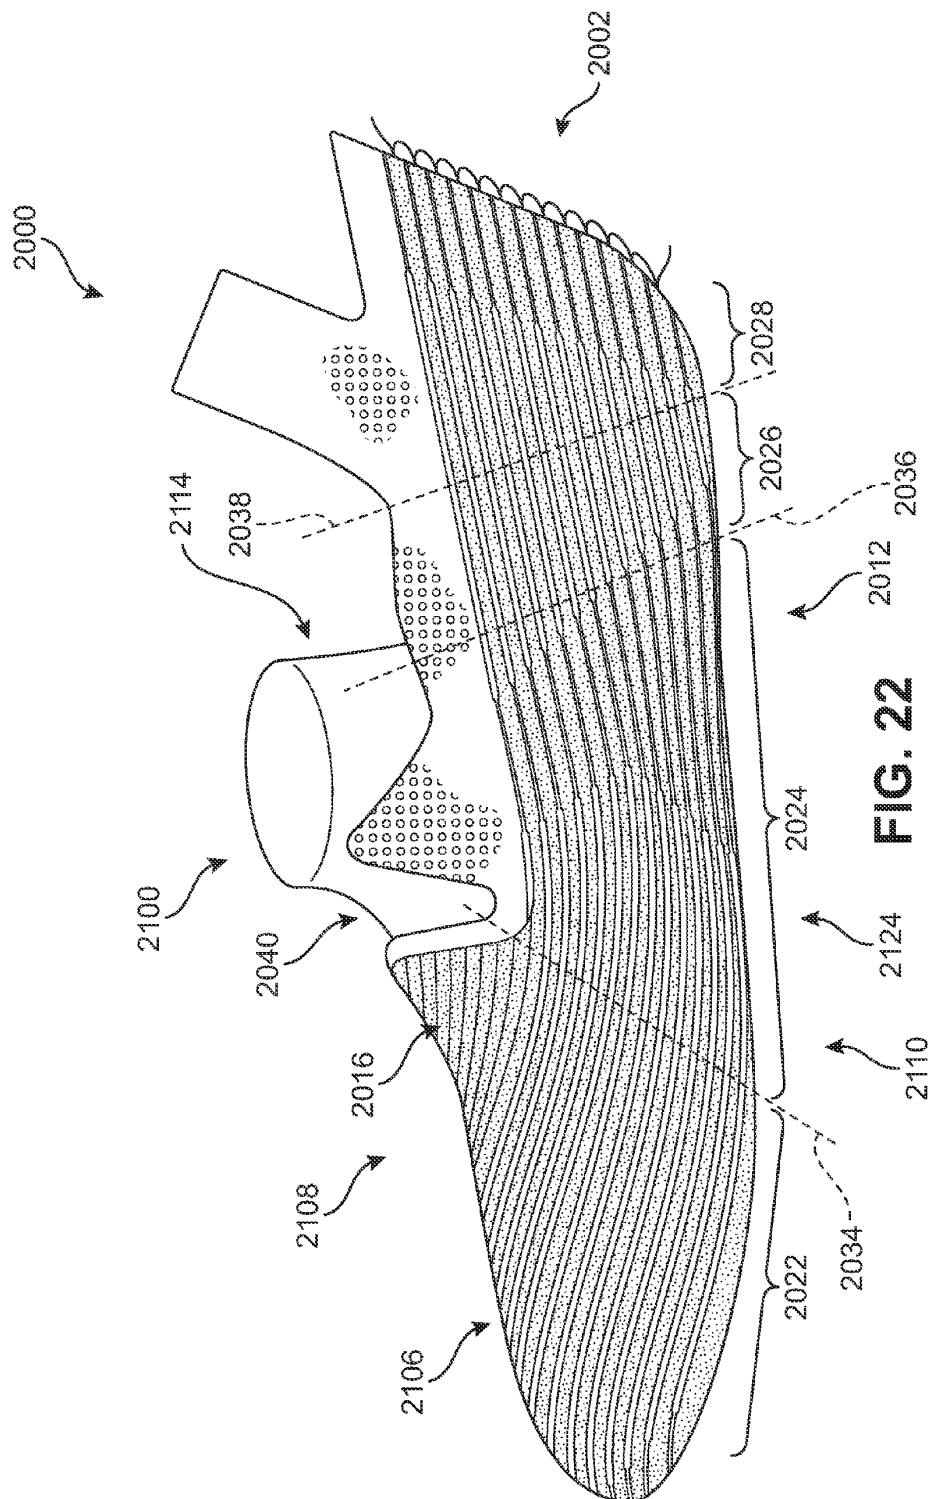
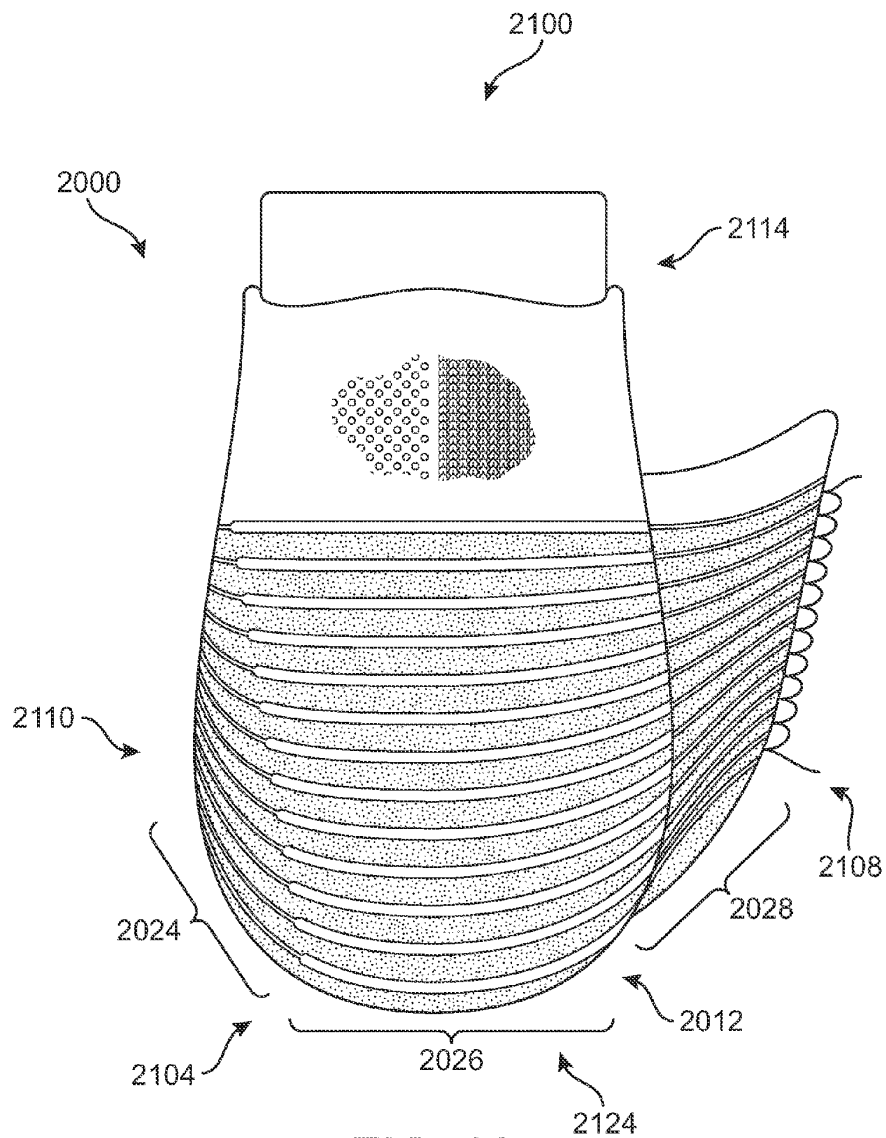



FIG. 19


FIG. 18





**FIG. 23**

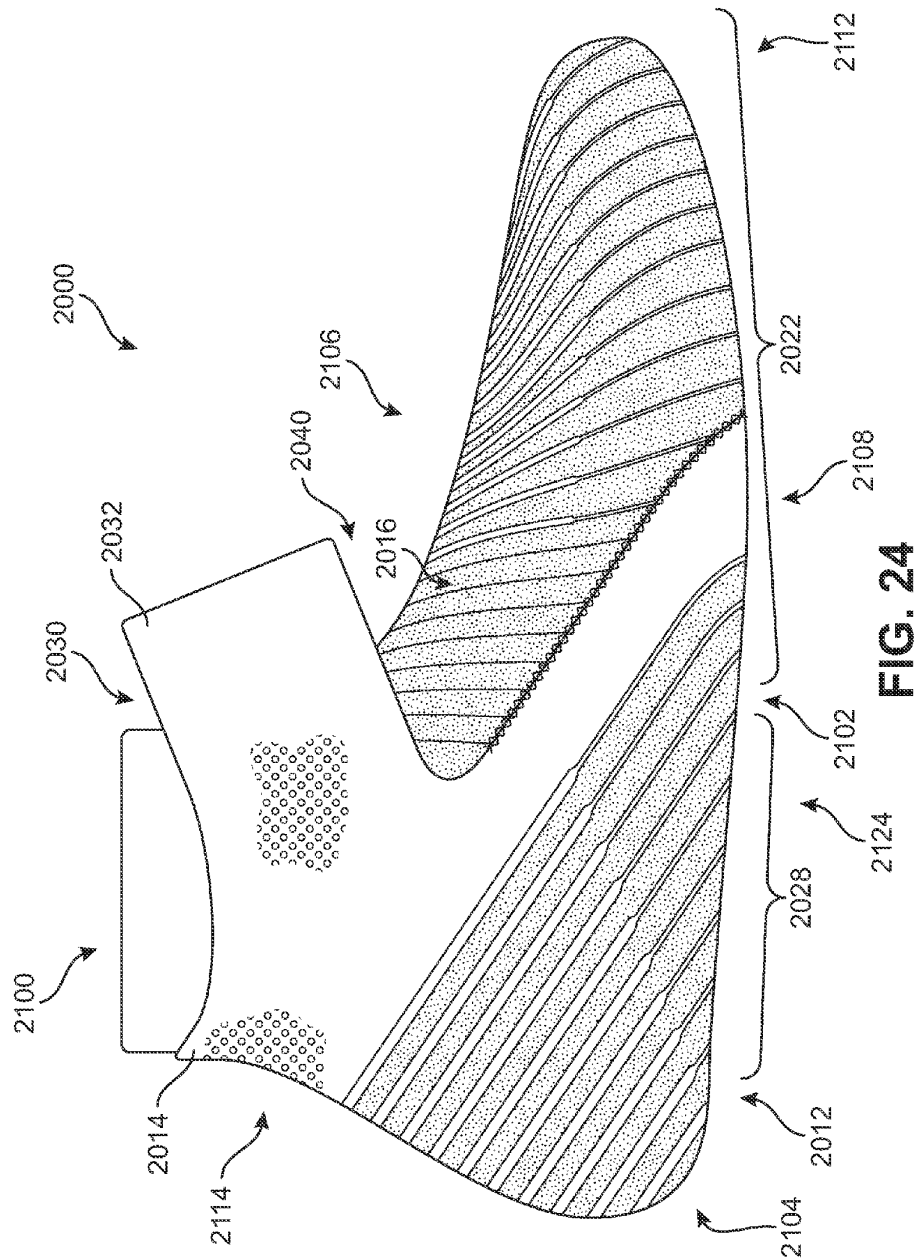

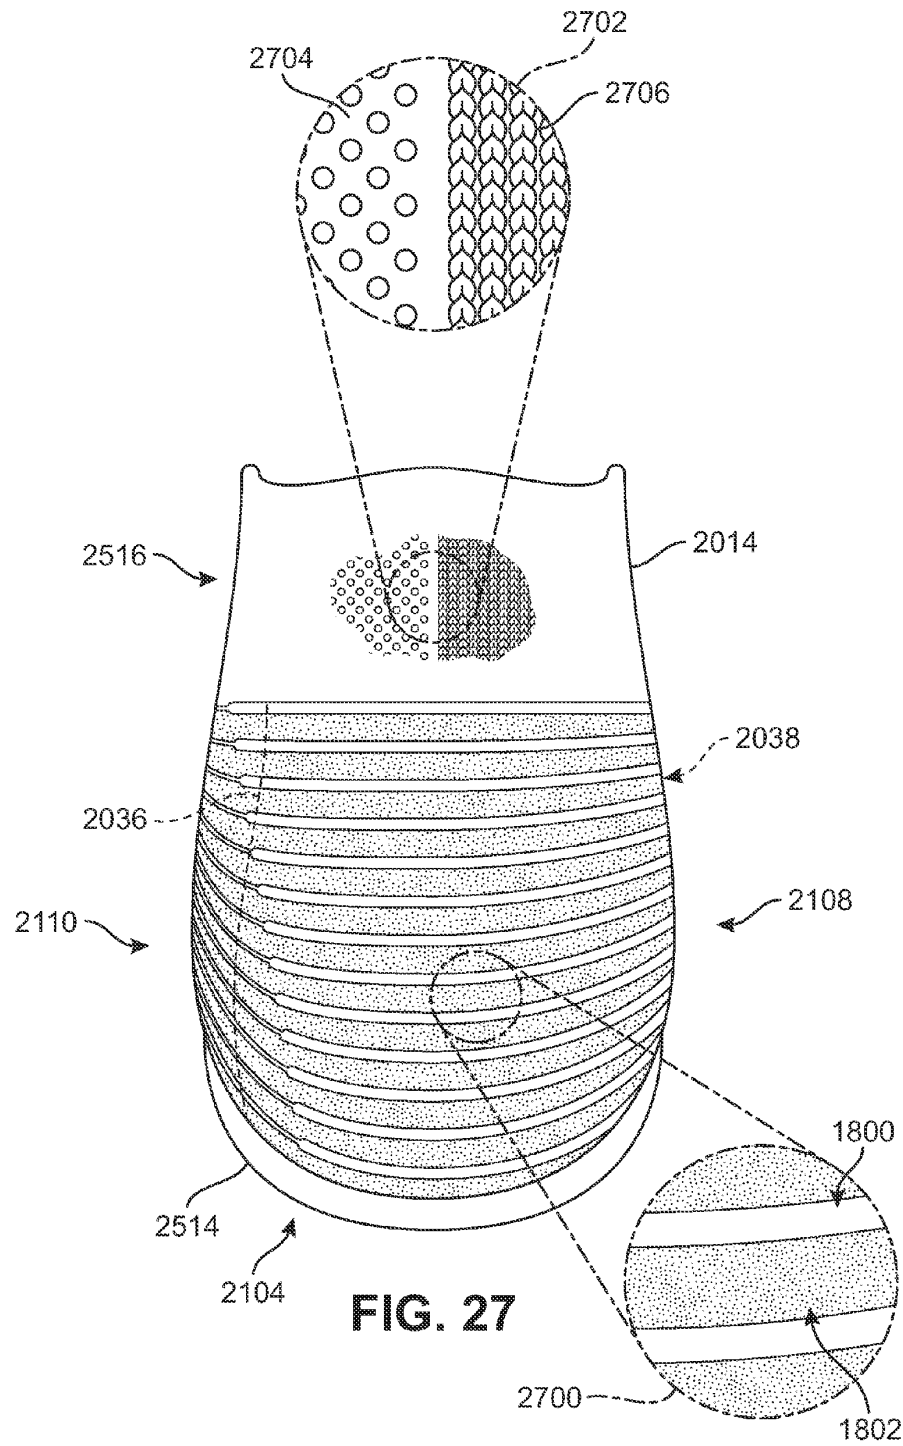

1

ARTICLE OF FOOTWEAR INCORPORATING A KNITTED COMPONENT

RELATED APPLICATIONS

This application is a continuation application of U.S. patent application Ser. No. 14/686,975, filed on Apr. 15, 2015 and entitled "Article of Footwear Incorporating A Knitted Component with Inlaid Tensile Elements and Method of Assembly", which is a division of U.S. patent application Ser. No. 14/535,413, filed on Nov. 7, 2014 and entitled "Article of Footwear Incorporating A Knitted Component with Inlaid Tensile Elements and Method of Assembly", which non-provisional patent application claims the benefit of priority under 35 U.S.C. § 119(e) to U.S. Provisional Patent Application Ser. No. 62/057,264, which was filed in the U.S. Patent and Trademark Office on Sep. 30, 2014 and entitled "Article of Footwear Incorporating A Knitted Component with Inlaid Tensile Elements and Method of Assembly", the disclosures of which applications are incorporated herein by reference in their entireties.

BACKGROUND

The present invention relates generally to articles of footwear, and, in particular, to articles of footwear incorporating knitted components.

Conventional articles of footwear generally include two primary elements, an upper and a sole structure. The upper is secured to the sole structure and forms a void on the interior of the footwear for comfortably and securely receiving a foot. The sole structure is secured to a lower area of the upper, thereby being positioned between the upper and the ground. In athletic footwear, for example, the sole structure may include a midsole and an outsole. The midsole often includes a polymer foam material that attenuates ground reaction forces to lessen stresses upon the foot and leg during walking, running, and other ambulatory activities. Additionally, the midsole may include fluid-filled chambers, plates, moderators, or other elements that further attenuate forces, enhance stability, or influence the motions of the foot. The outsole is secured to a lower surface of the midsole and provides a ground-engaging portion of the sole structure formed from a durable and wear-resistant material, such as rubber. The sole structure may also include a sockliner positioned within the void and proximal a lower surface of the foot to enhance footwear comfort.

The upper generally extends over the instep and toe areas of the foot, along the medial and lateral sides of the foot, under the foot, and around the heel area of the foot. In some articles of footwear, such as basketball footwear and boots, the upper may extend upward and around the ankle to provide support or protection for the ankle. Access to the void on the interior of the upper is generally provided by an ankle opening in a heel region of the footwear.

A variety of material elements (e.g., textiles, polymer foam, polymer sheets, leather, synthetic leather) are conventionally used in manufacturing the upper. In athletic footwear, for example, the upper may have multiple layers that each include a variety of joined material elements. As examples, the material elements may be selected to impart stretch-resistance, wear-resistance, flexibility, air-permeability, compressibility, comfort, and moisture-wicking to different areas of the upper. In order to impart the different properties to different areas of the upper, material elements are often cut to desired shapes and then joined together,

2

usually with stitching or adhesive bonding. Moreover, the material elements are often joined in a layered configuration to impart multiple properties to the same areas. As the number and type of material elements incorporated into the upper increases, the time and expense associated with transporting, stocking, cutting, and joining the material elements may also increase. Waste material from cutting and stitching processes also accumulates to a greater degree as the number and type of material elements incorporated into the upper increases. Moreover, uppers with a greater number of material elements may be more difficult to recycle than uppers formed from fewer types and numbers of material elements. By decreasing the number of material elements used in the upper, therefore, waste may be decreased while increasing the manufacturing efficiency and recyclability of the upper.

SUMMARY

In one aspect, a knitted component formed of unitary knit construction, where the knitted component includes a plurality of webbed areas that include a plurality of courses formed from a first yarn. The webbed areas are configured to move between a neutral position and an extended position. The webbed areas are biased to move toward the neutral position and to stretch toward the extended position in response to a force applied to the webbed areas. The knitted component also includes a plurality of tubular rib structures that are adjacent to the webbed areas. The tubular rib structures include a plurality of courses formed from a second yarn. The plurality of tubular rib structures include two co-extensive and overlapping knit layers and a central area that is generally unsecured to form a hollow between the two knit layers.

In another aspect, an article of footwear comprising a sole and an upper that is attached to the sole is disclosed. The upper includes a knitted component formed of unitary knit construction. The knitted component including a plurality of webbed areas and a plurality of tubular rib structures. The plurality of webbed areas including a plurality of courses formed from a first yarn. The tubular rib structures including a plurality of courses formed from a second yarn. The tubular rib structures are disposed adjacent to the webbed areas. The plurality of tubular rib structures include two co-extensive and overlapping knit layers and a central area that is generally unsecured to form a hollow between the two knit layers. The webbed areas are configured to move between a neutral position and an extended position. The webbed areas are biased to move toward the neutral position. The webbed areas are configured to stretch from the neutral position to the extended position in response to a force applied to the webbed areas.

In another aspect, a method of manufacturing a knitted component formed of unitary knit construction is disclosed. The method includes knitting a first plurality of courses to define a first webbed area of the knitted component. The knitted component is associated with a longitudinal direction and a lateral direction. The first webbed area is configured to move between a neutral position and an extended position. The first webbed area is biased toward the neutral position. The first webbed area is configured to stretch in the lateral direction toward the extended position of the first webbed area in response to a force applied to the first webbed area. The method where knitting the first plurality of courses includes extending the first plurality of courses along the longitudinal direction of the knitted component. The method also including knitting a second plurality of courses to define a first tubular rib structure of the knitted component. At least

3

one of the first plurality of courses is joined with at least one of the second plurality of courses so as to form the first webbed area and the first tubular structure of unitary knit construction. The method where knitting the second plurality of courses includes extending the second plurality of courses along the longitudinal direction of the knitted component.

Other systems, methods, features and advantages of the embodiments will be, or will become, apparent to one of ordinary skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description and this summary, be within the scope of the embodiments, and be protected by the following claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The present disclosure can be better understood with reference to the following drawings and description. The components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the present disclosure. Moreover, in the figures, like reference numerals designate corresponding parts throughout the different views.

FIG. 1 is a perspective view of an embodiment of a knitted component, wherein the knitted component is shown in a first position;

FIG. 2 is a perspective view of an embodiment of the knitted component of FIG. 1 shown in a second position;

FIG. 3 is a perspective view of an embodiment of the knitted component, where the knitted component is shown in the first position with solid lines, and the knitted component is shown in the second position with broken lines;

FIG. 4 is a cross section of an embodiment of the knitted component taken along the line 4-4 of FIG. 1;

FIG. 5 is a cross section of an embodiment of the knitted component taken along the line 5-5 of FIG. 2;

FIG. 6 is a cross section of an embodiment of the knitted component including tensile elements;

FIG. 7 is a perspective view of an embodiment of the knitted component including tensile elements;

FIG. 8 is a detail view of an embodiment of the knitted component;

FIG. 9 is a schematic perspective view of an embodiment of a knitting machine configured for manufacturing the knitted component;

FIG. 10A is a schematic knitting diagram of an embodiment of the knitted component of FIG. 1;

FIG. 10B is a schematic knitting diagram of an embodiment of the knitted component of FIG. 1 including an inlaid tensile element;

FIG. 11 is a schematic illustration of an embodiment of a method of manufacturing an embodiment of the knitted component, wherein a webbed area is shown being formed;

FIG. 12 is a schematic illustration of an embodiment of a method of manufacturing an embodiment of the knitted component, wherein a tubular structure is shown being formed;

FIG. 13 is a schematic illustration of an embodiment of a method of manufacturing an embodiment of the knitted component, wherein webbed areas and tubular rib structures have been added;

FIG. 14 is a schematic illustration of an embodiment of a method of manufacturing an embodiment of the knitted component that includes tensile elements, wherein a tubular structure is being formed;

4

FIG. 15 is a schematic illustration of an embodiment of a method of manufacturing an embodiment of the knitted component that includes tensile elements, wherein a tubular structure is being formed and a cable is being incorporated in the tubular structure;

FIG. 16 is a schematic illustration of an embodiment of a method of manufacturing an embodiment of the knitted component that includes tensile elements, wherein a tubular structure is being formed;

FIG. 17 is a schematic illustration of an embodiment of a method of manufacturing an embodiment of the knitted component that includes tensile elements, wherein tubular rib structures and webbed areas have been added;

FIG. 18 is an embodiment of the knitted component in a first position;

FIG. 19 is an embodiment of the knitted component in a second position;

FIG. 20 is a top plan view of an embodiment of an upper for an article of footwear that includes a knitted component;

FIG. 21 is a perspective view of an upper assembly method that includes an embodiment of the knitted component;

FIG. 22 is a perspective view of an upper assembly method that includes an embodiment of the knitted component;

FIG. 23 is a perspective view of an upper assembly method that includes an embodiment of the knitted component;

FIG. 24 is a perspective view of an upper assembly method that includes an embodiment of the knitted component;

FIG. 25 is a lateral side isometric view of an article of footwear that includes an embodiment of the knitted component;

FIG. 26 is a medial side view of an article of footwear that includes an embodiment of the knitted component; and

FIG. 27 is a rear view of an article of footwear that includes an embodiment of the knitted component.

DETAILED DESCRIPTION

The following discussion and accompanying figures disclose a variety of concepts relating to knitted components and the manufacture of knitted components. Although the knitted components may be used in a variety of products, an article of footwear that incorporates one of the knitted components is disclosed below as an example. In addition to footwear, the knitted component may be used in other types of apparel (e.g., shirts, pants, socks, jackets, undergarments), athletic equipment (e.g., golf bags, baseball and football gloves, soccer ball restriction structures), containers (e.g., backpacks, bags), and upholstery for furniture (e.g., chairs, couches, car seats). The knitted component may also be used in bed coverings (e.g., sheets, blankets), table coverings, towels, flags, tents, sails, and parachutes. The knitted component may be used as technical textiles for industrial purposes, including structures for automotive and aerospace applications, filter materials, medical textiles (e.g. bandages, swabs, implants), geotextiles for reinforcing embankments, agrotexiles for crop protection, and industrial apparel that protects or insulates against heat and radiation. Accordingly, the knitted component and other concepts disclosed herein may be incorporated into a variety of products for both personal and industrial purposes.

FIG. 1 shows a knitted component 100 illustrated according to an exemplary embodiment of the present disclosure. In some embodiments, knitted component 100 may be

5

provided with different structural portions that affect the properties and/or physical characteristics of knitted component **100**. In an exemplary embodiment, at least a portion of knitted component **100** can include rib structures that provide strength and/or support to knitted component. In some cases, rib structures can be hollow tubes formed in knitted component **100** by co-extensive and overlapping knit layers that are closed to form the tube. In other cases, rib structures may include additional components that are disposed within the tubes, as will be described in more detail below.

In some embodiments, at least a portion of knitted component **100** extending between the rib structures can be flexible, elastic, and resilient. More specifically, in some embodiments, knitted component **100** can resiliently stretch, deform, compress, flex, or otherwise move between a first position and a second position. Additionally, knitted component **100** can be compressible and can recover from a compressed state to a neutral position in some embodiments.

FIG. **1** illustrates a first position of an embodiment of knitted component **100**, and FIG. **2** illustrates a second position of an embodiment of knitted component **100**. For purposes of clarity, FIG. **3** shows knitted component **100** in both positions, wherein the first position is represented in solid lines and the second position is represented in broken lines. In some embodiments, knitted component **100** can be biased to move toward the first position. Accordingly, in some embodiments, a force can be applied to knitted component **100** to move knitted component **100** to the second position. When released, in some embodiments, knitted component **100** can resiliently recover and return to the first position. In some embodiments, knitted component **100** can be subjected to a load, and as a result may compress or stretch. In other embodiments, knitted component **100** can recover to the first position of FIG. **1** once the compression load is reduced.

The resiliency and elasticity of knitted component **100** can provide benefits. For example, knitted component **100** can deform resiliently under a load, supplying a cushion against the load. Then, once the load is reduced, knitted component **100** can recover to its original position, and can continue to provide cushioning, structural reinforcement, and support. Additionally, the elasticity of knitted component **100** in the portions between adjacent rib structures can allow the arrangement of rib structures on knitted component **100** in various directions by adjusting the degree or amount of stretch, as will be further described below.

In an exemplary embodiment, knitted component **100** can include a plurality of rib structures arranged on various portions of knitted component **100**. These rib structures are configured as non-planar areas that can be arranged such that knitted component **100** has a wavy, undulating, corrugated, or otherwise uneven appearance. In some embodiments, when knitted component **100** moves from the first position represented in FIG. **1** toward the second position represented in FIG. **2**, knitted component **100** can become relatively flatter in the second position. In one embodiment, when moving back to the first position, the waviness of knitted component **100** can increase. In some embodiments, the waviness of knitted component **100** can increase the range of motion and stretchability of knitted component **100**. Accordingly, in some embodiments, knitted component **100** can provide a high degree of dampening or cushioning.

Referring now to FIGS. **1-7**, knitted component **100** is depicted as separate from an article of footwear. In some embodiments, a knitted component (for example, knitted component **100**) according to the present disclosure can be incorporating into an upper of an article of footwear. In an

6

exemplary embodiment, a knitted component may form a substantial majority of the upper of the article of footwear.

In various embodiments, knitted component **100** is formed of unitary knit construction. As used herein and in the claims, a knitted component (e.g., knitted component **100**, or other knitted components described herein) is defined as being formed of “unitary knit construction” when formed as a one-piece element through a knitting process. That is, the knitting process substantially forms the various features and structures of knitted component **100** without the need for significant additional manufacturing steps or processes. A unitary knit construction may be used to form a knitted component having structures or elements that include one or more courses of yarn or other knit material that are joined such that the structures or elements include at least one course in common (i.e., sharing a common yarn) and/or include courses that are substantially continuous between each of the structures or elements. With this arrangement, a one-piece element of unitary knit construction is provided.

Although portions of knitted component **100** may be joined to each other (e.g., edges of knitted component **100** being joined together) following the knitting process, knitted component **100** remains formed of unitary knit construction because it is formed as a one-piece knit element. Moreover, knitted component **100** remains formed of unitary knit construction when other elements (e.g., a lace, logos, trademarks, placards with care instructions and material information, structural elements) are added following the knitting process.

In different embodiments, any suitable knitting process may be used to produce knitted component **100** formed of unitary knit construction, including, but not limited to a warp knitting or a weft knitting process, including a flat knitting process or a circular knitting process, or any other knitting process suitable for providing a knitted component. Examples of various configurations of knitted components and methods for forming the knitted component **100** with unitary knit construction are disclosed in U.S. Pat. No. 6,931,762 to Dua; and U.S. Pat. No. 7,347,011 to Dua, et al., the disclosure of each being incorporated by reference in its entirety. In an exemplary embodiment, a flat knitting process may be used to form knitted component **100**, as will be described in more detail.

For reference purposes, knitted component **100** is illustrated with respect to a Cartesian coordinate system in FIGS. **1-7**. Specifically, a longitudinal direction **102**, a lateral direction **104**, and a thickness direction **106** of knitted component **100** are shown. However, knitted component **100** can be illustrated relative to a radial coordinate system or other coordinate system.

As shown in FIGS. **1-3**, some embodiments of knitted component **100** can include a front surface **108** and a back surface **110**. Moreover, knitted component **100** can include a peripheral edge **114** in different embodiments. Peripheral edge **114** can define the boundaries of knitted component **100**. In one embodiment, knitted component **100** may have a thickness visible along peripheral edge **114** that extends in thickness direction **106** between front surface **108** and back surface **110**. In some embodiments, peripheral edge **114** of knitted component **100** may extend around a periphery of knitted component **100** and may be further sub-divided into any number of sides, depending on the configuration of the knitted component. For example, in one embodiment of knitted component **100**, peripheral edge **114** can include four sides defining an approximately rectangular shape of knitted component **100** as shown in FIGS. **1-3**.

More specifically, in some embodiments, as shown in FIGS. 1-3, peripheral edge 114 of knitted component 100 can be sub-divided into a first edge 116, a second edge 118, a third edge 120, and a fourth edge 122. First edge 116 and second edge 118 can be spaced apart in longitudinal direction 102. Third edge 120 and fourth edge 122 can be spaced apart in lateral direction 104. Third edge 120 can extend between first edge 116 and second edge 118, and fourth edge 122 can also extend between first edge 116 and second edge 118. In some embodiments, knitted component 100 can be generally rectangular. However, it will be appreciated that knitted component 100 can define any shape without departing from the scope of the present disclosure, including regular and irregular (non-geometrical) shapes.

In different embodiments, front surface 108 and/or back surface 110 of knitted component 100 can be rippled, wavy, bumpy, undulated, corrugated or otherwise uneven and non-planar. Any waviness may be intermittent or continuous. It will also be appreciated that in some embodiments, knitted component 100 can include a series of non-planar features or constructions. For example, knitted component 100 can include ribs, tunnels, peaks and troughs, corrugations, steps, raised ridges and recessed channels, or other uneven features formed by the knit structure of knitted component 100. Such features where they occur can extend across knitted component 100 in any direction. In some embodiments, knitted component 100 can include a plurality of tubular rib structures 126 and a plurality of webbed areas 128. For purposes of this description, tubular rib structures 126 and webbed areas 128 will be referred to collectively as “ribbed features”.

Generally, tubular rib structures 126 can be areas of knitted component 100 constructed with two or more co-extensive and overlapping knit layers. Knit layers may be portions of knitted component 100 that are formed by knitted material, for example, threads, yarns, or strands. Two or more knit layers may be formed of unitary knit construction in such a manner so as to form tubes or tunnels, identified as tubular rib structures 126, in knitted component 100. Although the sides or edges of the knit layers forming tubular rib structures 126 may be secured to the other layer, a central area is generally unsecured to form a hollow between the two layers of knitted material forming each knit layer. In some embodiments, the central area of tubular rib structures 126 may be configured such that another element (e.g., a tensile element) may be located between and pass through the hollow between the two knit layers forming tubular rib structures 126.

Knitted component 100 can include any suitable number of tubular rib structures 126. In some embodiments, two or more tubular rib structures 126 of knitted component 100 can have similar shape and dimensions to each other. In other embodiments, the shape and dimensions of tubular rib structures 126 can vary across knitted component 100. In some embodiments, tubular rib structures 126 can generally be shaped as a cylinder. In an exemplary embodiment, tubular rib structures 126 may have an elongated cylindrical shape with a wider top portion associated with front surface 108 and a narrower lower portion associated with back surface 110. In other embodiments, tubular rib structures 126 can be shaped as a generally circular or elliptical cylinder. Knitted component can include differently shaped tubular rib structures 126.

Generally, webbed areas 128 may be connecting portions between various elements and/or components of knitted component 100. Webbed areas 128 are formed of unitary knit construction with the remaining portions of knitted

component 100 and may serve to connect various portions together as a one-piece knit element. Knitted component 100 can include any suitable number of webbed areas 128. In different embodiments, webbed areas 128 can be an area of knitted component 100 comprising one knit layer. In some embodiments, webbed areas 128 may extend between one portion of knitted component and another portion of knitted component 100. In one embodiment, webbed areas 128 can extend between one tubular rib structure and another tubular rib structure. In a different embodiment, webbed areas 128 may extend between one tubular rib structure and another portion of knitted component 100. In another embodiment, webbed area 128 may extend between one tubular rib structure and an edge of knitted component 100.

In some embodiments, webbed areas 128 may be disposed in an alternating manner between two or more tubular rib structures 126. In an exemplary embodiment, webbed areas 128 can extend between and connect two or more adjacent tubular rib structures 126. With this configuration, webbed areas 128 and tubular rib structures 126 are formed together with knitted component 100 of unitary knit construction.

Moreover, as shown in FIGS. 4 and 5, knitted component 100 can have a knit layer thickness 400 that is measured from front surface 108 to back surface 110 of some areas. In some embodiments, knit layer thickness 400 can be substantially constant throughout knitted component 100. In other embodiments, knit layer thickness 400 can vary with certain portions being thicker than other portions. It will be appreciated that in some embodiments, knit layer thickness 400 can be selected and controlled according to the diameter of yarn(s) used. Knit layer thickness 400 can also be controlled according to the denier of the yarn(s) in another embodiment. Additionally, in other embodiments, knit layer thickness 400 can be controlled according to the stitch density within knitted component 100.

As mentioned, knitted component 100 can be resiliently flexible, compressible, and stretchable. Webbed areas 128 and/or tubular rib structures 126 can flex, deform, or otherwise move as knitted component 100 stretches. For example, in the first position of FIGS. 1 and 4, webbed areas 128 can remain relatively compressed and compact. In the second position of FIGS. 2 and 5, webbed areas 128 can be relatively more extended and stretched. Furthermore, stretching of webbed areas 128 may result in a stretching and flattening of knitted component 100. In addition, in some embodiments, tubular rib structures 126 can compress or extend.

The first position of knitted component 100 shown in FIGS. 1 and 4 can also be referred to as an unstretched position or a neutral position in some embodiments. The second position represented in the embodiments of FIGS. 2 and 5 can also be referred to as a stretched position or an extended position.

If knitted component 100 is stretched to the second position, the resilience and elasticity of knitted component 100 can allow knitted component 100 to recover and move back toward the first position represented in FIGS. 1 and 4 once the stretching force is removed. Stated differently, knitted component 100 can be biased toward the first position.

As shown in FIG. 3, movement of knitted component 100 from the first position to the second position can cause knitted component 100 to stretch and elongate in lateral direction 104 in some embodiments. More specifically, as shown in FIG. 3, knitted component 100 can have a first width 300 in the first position, measured from third edge 120

9

to fourth edge 122 along lateral direction 104. In contrast, knitted component 100 can have a second width 302 which is longer than first width 300, as shown in FIG. 4. It will be appreciated that knitted component 100 can have varying widths as it is stretched. In some cases first width 300 and/or second width 302 may each vary, depending in part on the materials comprising knitted component 100 and the amount of force applied.

As seen in FIG. 3, knitted component 100 can also have an overall length 304 that is measured between first edge 116 and second edge 118 along longitudinal direction 102. In some embodiments, length 304 can remain substantially constant. In other embodiments, knitted component 100 can exhibit some stretchability in longitudinal direction 102 such that length 304 is variable. In one embodiment, webbed areas 128 and tubular rib structures 126 may stretch in longitudinal direction 102. In some embodiments, knitted component 100 can stretch in response to a force along longitudinal direction 102 such that length 304 increases. In other embodiments, knitted component 100 can exhibit a significantly higher degree of stretchability in lateral direction 104 than in longitudinal direction 102.

Furthermore, knitted component 100 can have a body thickness that changes as knitted component 100 moves. Body thickness refers to the height of tubular rib structures 126 in knitted component 100 in thickness direction 106. For example, in some embodiments, body thickness can vary as the curvature of tubular rib structures 126 change as knitted component 100 stretches and compresses. Specifically, as shown in FIG. 3, knitted component 100 has a first body thickness 306 in the first position, depicted in solid lines, and knitted component 100 has a second body thickness 308 in the second position, depicted in broken lines. In FIG. 3, first body thickness 306 is greater than second body thickness 308.

In addition, different areas of knitted component 100 can have different body thicknesses. In different embodiments, one portion of knitted component 100 may have a greater body thickness than another portion of knitted component 100. In another embodiment, some tubular rib structures of knitted component 100 may experience greater stretching and have a body thickness that is less than the body thickness of other tubular rib structures in knitted component 100.

Webbed areas 128 and tubular rib structures 126 of knitted component 100 will now be discussed in greater detail. In some embodiments, webbed areas 128 can be elongated and substantially straight, as shown in FIGS. 1-3. More specifically, webbed areas 128 can extend longitudinally along a respective web axis 130, one of which is indicated in FIG. 1 as an example. Webbed areas 128 can include a first longitudinal ends 134 and a second longitudinal ends 136, as shown in FIG. 2. Similarly, tubular rib structures 126 can extend longitudinally along a respective tubular axis 132, one of which is indicated in FIG. 1 as an example. Tubular rib structures 126 can include a first longitudinal ends 138 and a second longitudinal ends 140, as shown in FIGS. 1 and 2. In some embodiments, web axis 130 and tubular axis 132 can be substantially straight and parallel to longitudinal direction 102. In other embodiments, web axis 130 and/or tubular axis 132 can be curved relative to longitudinal direction 102. Also, in some embodiments, webbed areas 128 and tubular rib structures 126 can be nonparallel relative to each other. In one embodiment, tubular rib structures 126 may exhibit greater curvature than webbed areas 128. In another embodiment, webbed areas 128 may exhibit greater curvature than tubular rib structures 126.

10

Additionally, in some embodiments, as shown in FIG. 2, first longitudinal ends 134 of webbed areas 128 can be disposed proximate first edge 116 of knitted component 100, and second longitudinal ends 136 of webbed areas 128 can be disposed proximate second edge 118 of knitted component 100. Likewise, first longitudinal ends 138 of tubular rib structures 126 can be disposed proximate to first edge 116 of knitted component 100, and second longitudinal ends 140 of tubular rib structures 126 can be disposed proximate to second edge 118 of knitted component.

Furthermore, in some embodiments, first longitudinal ends 134 of webbed areas 128 and first longitudinal ends 138 of tubular rib structures 126 can cooperate to define first edge 116 of knitted component 100. Similarly, second longitudinal ends 136 of webbed areas 128 and second longitudinal ends 140 of tubular rib structures 126 can cooperate to define second edge 118 of knitted component 100 in some embodiments.

Webbed areas 128 can include a first webbed area 142. In some embodiments, first webbed area 142 can be representative of other webbed areas 128. Referring to FIGS. 1-5, in different embodiments, first webbed area 142 may be curved or may lie relatively flat along the lateral direction 104. In one embodiment, first webbed area 142 can be generally flat. In other embodiments, first webbed area 142 can be curved or angled. In some embodiments, first webbed area 142 can be concave on front surface 108. In other embodiments, first webbed area 142 can be convex on front surface 108.

It should be understood that in some embodiments, webbed areas 128 can be stretched to a greater extent relative to other embodiments, resulting in a substantially flattened shape of knitted component 100. In these embodiments, webbed areas 128 may comprise a relatively more planar than rounded shape.

In some embodiments, webbed areas 128 of knitted component 100 can have a similar shape and dimensions to other webbed areas 128. In other embodiments, the shape and dimensions of webbed areas 128 can vary across knitted component 100.

In different embodiments, tubular rib structures 126 can include a first tubular structure 146. In some embodiments, first tubular structure 146 can be representative of other tubular rib structures 126. First tubular structure 146 can have a tube shape in some embodiments. When viewed in cross-section, as shown in FIGS. 4 and 5, tubular rib structures 126 can include a first curved portion 416 and a second curved portion 418. In an exemplary embodiment, first curved portion 416 is disposed opposite of second curved portion 418 on the respective top and bottom of tubular rib structures 126. In some embodiments, first curved portion 416 and second curved portion 418 may be knitted together to define the tube forming tubular rib structure 126. In the embodiment of FIGS. 4 and 5, first curved portion 416 and second curved portion 418 meet along a first transition 420 edge and also along a second transition 422 edge, forming a tunnel or tube shape.

In some embodiments, first curved portion 416 can comprise a portion of front surface 108 of knitted component. In some embodiments, second curved portion 418 can comprise a portion of back surface 110 of knitted component 100. Together, first curved portion 416 and second curved portion 418 may comprise two sides of first tubular structure 146. In different embodiments, first curved portion 416 may be comprised of one knit layer and second curved portion 418 may be comprised of another knit layer.

Various areas of first tubular structure 146 can comprise different shapes. In different embodiments, first curved

11

portion 416 and second curved portion 418 can move and change shape. In some embodiments, first curved portion 416 and/or second curved portion 418 can be relatively level or flattened. In other embodiments, first curved portion 416 and/or second curved portion 418 can be rounded or curve by varying amounts.

In other embodiments, first curved portion 416 and/or second curved portion 418 can comprise curved areas of tubular rib structures 126. First curved portion 416 and/or second curved portion 418 can be curved or bent to a greater degree in some embodiments, and to a lesser degree in other embodiments. For example, in some embodiments, the amount of courses of knit material forming first curved portion 416 and/or second curved portion 418 may be varied to change the associated degree or amount of curvature of the respective first curved portion 416 and/or second curved portion 418. Additionally, the direction of the curvature of each of first curved portion 416 and/or second curved portion 418 may vary. In one embodiment, first curved portion 416 and/or second curved portion 418 may be provided such that first tubular structure 146 can be convex on front surface 108 and convex on back surface 110.

In different embodiments, tubular rib structures 126 can define one or more hollow tubes. A hollow tube 112 may be a generally unsecured area disposed between first curved portion 416 and second curved portion 418 of tubular rib structure that has the configuration of a tunnel or channel. In some embodiments, first tubular structure 146 may comprise a generally cylindrical or elliptical shape, with hollow tube 112 extending throughout the length of first tubular structure 146 in a longitudinal direction 102. In some embodiments, hollow tube 112 may form a tunnel within tubular rib structures 126, and may extend partway along the length of tubular rib structures 126. In other embodiments, hollow tube 112 may extend throughout the full length of tubular rib structures 126. The diameter of one hollow tube and the diameter of other hollow tubes may differ in some embodiments, as discussed further below.

In different embodiments, webbed areas 128 and tubular rib structures 126 may be arranged in various configurations. As shown in FIG. 4, webbed areas 128 and tubular rib structures 126 can be spaced apart relative to each other. For example, in some embodiments, webbed areas 128 and tubular rib structures 126 can be spaced apart in lateral direction 104. Also, in some embodiments, webbed areas 128 and tubular rib structures 126 can be arranged in an alternating pattern across knitted component 100. More specifically, as shown in FIGS. 1-5, webbed areas 128 can include first webbed area 142 and a second webbed area 144. Likewise, tubular rib structures 126 can include first tubular structure 146 as well as a second tubular structure 148. First tubular structure 146 can be disposed between and can separate first webbed area 142 and second webbed area 144. Furthermore, first webbed area 142 can be disposed between and can separate first tubular structure 146 and second tubular structure 148. This alternating arrangement can be repeated across knitted component 100 in lateral direction 104 in some embodiments.

In some embodiments, such as those shown in FIGS. 4 and 5, knitted component 100 can further include a third tubular structure 432, a third webbed area 442, a fourth tubular structure 434, a fourth webbed area 444, a fifth tubular structure 436, a fifth webbed area 446, and a sixth tubular structure 438. Third tubular structure 432 can define third edge 120 of knitted component 100. Moving away from third edge 120 in lateral direction 104, third webbed area 442 is disposed adjacent to third tubular structure 432.

12

Also, fourth tubular structure 434 is disposed adjacent third webbed area 442, and second webbed area 144 is disposed adjacent fourth tubular structure 434. As stated, first webbed area 142 is disposed adjacent second tubular structure 148, first tubular structure 146 is disposed adjacent first webbed area 142, and second webbed area 144 is disposed adjacent first tubular structure 146. Additionally, second tubular structure 148 is disposed adjacent to fourth webbed area 444, fourth webbed area 444 is disposed adjacent to fifth tubular structure 436. Fifth tubular structure 436 is disposed adjacent to fifth webbed area 446, and fifth webbed area 446 is disposed adjacent to sixth tubular structure 438. Sixth tubular structure 438 can define fourth edge 122.

Webbed areas 128 and tubular rib structures 126 can be directly adjacent and attached to each other in some embodiments. More specifically, as shown in the embodiment of FIG. 5, first webbed area 142 can be attached to first tubular structure 146 at first transition 420. First webbed area 142 is also attached to second tubular structure 148 at second transition 422. This arrangement can be repeated among other adjacent pairs of webbed areas and tubular rib structures as well.

In other embodiments the arrangement of the webbed areas and tubular rib structures may differ. In one embodiment, two or more webbed areas may be disposed adjacent to one another within knitted component 100. In another embodiment, two or more tubular rib structures may be disposed adjacent one another within knitted component 100. In some embodiments, the webbed areas and/or tubular rib structures may be disposed adjacent to other portions of knitted component 100.

In different embodiments, the position of webbed areas 128 and tubular rib structures 126 may vary as knitted component 100 moves between the first position of FIGS. 1 and 4 and the second position of FIGS. 2 and 5. As shown in FIG. 4, webbed areas 128 can be in a compacted or unstretched position when knitted component 100 is in the first position. In some embodiments, tubular rib structures 126 can similarly be in a compacted or unstretched position when knitted component 100 is in the first position. In contrast, as shown in FIG. 5, webbed areas 128 can be in an extended or stretched position when knitted component 100 is in the second position, and tubular rib structures 126 can similarly be in an extended or stretched position when knitted component 100 is in the second position. The lateral width of webbed areas 128 can be smaller in the neutral position as compared to the extended position. In addition, as seen in FIGS. 4-5, the midpoints of first curved portion 416 and second curved portion 418 of tubular rib structures 126 can be closer together in the stretched position as compared to the unstretched position, as body thickness changes from first body thickness 306 to second body thickness 308, as shown in FIG. 3. Similarly, as shown in FIGS. 4 and 5, in some embodiments, first transition 420 can be closer to second transition 422 in the relaxed or neutral position than in the extended or stretched position. This is due in part to the change in curvature of first curved portion 416 and second curved portion 418 about the respective tubular axis 132 when moving between the compacted and extended positions associated with the neutral or unstretched first position of knitted component 100 and the extended or stretched second position of knitted component 100. This can be seen as first curved portion 416 and second curved portion 418 move closer to imaginary reference plane 402 from FIG. 4 to FIG. 5.

In some embodiments, the arrangement of adjacent tubular rib structures 126 may be provided such that webbed

13

areas 128 disposed between each pair of adjacent tubular rib structures 126 is at least partially obscured from visual observation in the neutral or unstretched position when viewed from top surface 108. That is, first curved portion 416 of each adjacent tubular rib structure 126 may be touching or close to each other such that webbed area 128 below is not visible in the unstretched position of knitted component 100. When some force is applied to knitted component 100 to move knitted component 100 from the unstretched position to the stretched position, the relative positions of webbed areas 128 and tubular rib structures 126 are moved apart from neutral positions to extended positions, and the underlying webbed areas 128 may then be revealed for visual observation from top surface 108. In an exemplary embodiment, webbed areas 128 may be knitted using a contrasting type or color of yarn than tubular rib structures 126, such that when moving knitted component 100 from the unstretched position to the stretched position, the contrast of webbed area 128 is revealed to visual observation from top surface 108.

In different embodiments, webbed areas 128 and tubular rib structures 126 can have different degrees of stretch as knitted component moves from the unstretched or neutral position to the stretched or extended position. For example, in FIG. 4, fifth webbed area 446 has a width W1, and first tubular structure 146 has a width W2. In FIG. 5, fifth webbed area 446 has a width W2 and first tubular structure 146 has a width W4. As knitted component 100 moves from the first position of FIG. 4 to the second position of FIG. 5, width W1 increases to width W2, and width W3 increases to width W4. In some embodiments, the lateral stretch that occurs along webbed areas 128 can be greater than the stretch that occurs along tubular rib structures 126. For example, in one embodiment, the percentage of increase from width W1 to width W2 may be greater than the percentage of increase from width W3 to width W4. In some embodiments, this difference may result from the particular construction of tubular rib structures 126, where two knit layers (for example, first curved portion 416 and second curved portion 418) are joined together, which can constrain the amount of stretch. In other embodiments, this difference can be due to the strand selected in the knitting of tubular rib structures 126, and/or the inclusion of other material within openings 112 of tubular rib structures 126, such as tensile elements, as discussed further below.

Additionally, in some embodiments, webbed areas 128 and/or tubular rib structures 126 can be biased toward the neutral position represented in FIGS. 1 and 4. In some embodiments, webbed areas 128 and tubular rib structures 126 can respond to a force by moving toward the extended or stretched position represented in FIGS. 2 and 5. Once the stretching force is reduced, webbed areas 128 and tubular rib structures 126 can recover back to the neutral position represented in FIGS. 1 and 4. When the load is removed, the resilience of knitted component 100 and biasing provided by webbed areas 128 and tubular rib structures 126 can provide recovery of knitted component 100 back to the position of FIG. 4.

In different embodiments, knitted component 100 can be modified to limit the recovery from a stretched position to a more compact position. In some embodiments, this process is favored when knitted component 100 can be comprised at least partially of a fusible material. In one embodiment, the material may include a thermoplastic polymer material. In general, a thermoplastic polymer material softens or melts when heated and returns to a solid state when cooled. Although a wide range of thermoplastic polymer materials

14

may be utilized in knitted component 100, examples of possible thermoplastic polymer materials include thermoplastic polyurethane, polyamide, polyester, polypropylene, and polyolefin.

In some configurations, knitted component 100 may be entirely, substantially, or partially formed from one or more thermoplastic polymer materials. Advantages of forming the knitted component 100 from a thermoplastic polymer material are uniform properties, the ability to form thermal bonds, efficient manufacture, elastomeric stretch, and relatively high stability or tensile strength. Although a single thermoplastic polymer material may be utilized, individual strands in knitted component 100 may be formed from multiple thermoplastic polymer materials. Additionally, while each strand may be formed from a common thermoplastic polymer material, different strands may also be formed from different materials. As an example, some strands in knitted component 100 may be formed from a first type of thermoplastic polymer material, whereas other strands of knitted component 100 may be formed from a second type of thermoplastic polymer material, and further strands in knitted component 100 may be formed of a different material.

The thermoplastic polymer material may be selected to have various stretch and fusible properties, and the material may be considered elastomeric. As a related matter, the thermoplastic polymer material utilized may be selected to have various recovery properties. That is, knitted component 100 may be formed to return to an original, neutral shape after being stretched. However, in different embodiments, knitted component 100 may be formed and/or treated so that different portions include different capacities for stretch and recovery.

Knitted component 100 may be maintained in various neutral configurations as a result of different treatments to material forming the knitted component 100. Knitted component 100 may be treated in some manner to inhibit recovery to original position. Treatments may include chemical treatment, application of heat, alterations in manufacturing or material, or other treatments. The materials used in formation of knitted component 100 may influence the selection of treatment. In one embodiment, fusible materials may be selected to permit the use of heat to maintain a stretched position. Thus, in some embodiments, one or more portions of a knitted component 100 can remain in a stretched position, where the elastic recovery properties of the material are decreased.

Thus, in some embodiments, stretch in one or more areas may be maintained. In other words, areas of knitted component 100 may remain stretched relative to other areas even without a compression load. In some embodiments, the degree of stretch in one area and the degree of stretch in another area can differ. As a result, the width of one area of knitted component 100 can also differ from the widths of other areas of knitted component 100 that include the same number of ribbed features. Depending on the extent of stretch present, one section of knitted component 100 comprising a series of ribbed features may have an average width that is greater than the average width of another section of knitted component 100 comprising the same set of ribbed features. Thus, knitted component 100 may include varying levels of stretch throughout the component which can be maintained even in the absence of compression loads.

In addition, it should be noted that the orientation of ribbed features may also change as knitted component 100

15

is stretched in various ways. This aspect will be discussed in greater detail below, with respect to articles incorporating a knitted component.

In different embodiments, as shown in FIGS. 6-10, one or more tensile elements 600 can be incorporated in knitted component 100. Tensile elements 600 can provide support to knitted component 100. Stated differently, tensile elements 600 can allow knitted component 100 to resist deformation, stretching, or otherwise provide support for the wearer's foot during running, jumping, or other movements. Tensile elements may be arranged in such a manner as to improve performance characteristics. Tensile elements can enhance strength, support, and provide structural reinforcement.

In some embodiments, tensile elements 600 can be incorporated, inlaid, or extended into one or more tubular rib structures during the unitary knit construction of the knitted component 100. Stated another way, tensile elements 600 can be incorporated during the knitting process of knitted component 100. In one embodiment, tensile elements 600 can be extended across the tubular structure. In some embodiments, tensile elements 600 may lie within the tunnels formed by first curved portion 416 and second curved portion 418 of tubular rib structures.

In FIG. 6, a cross section of a portion of knitted component 100 is shown. A first tubular structure 602 and a second tubular structure 604 are depicted, with a webbed area 606 disposed between the two tubular rib structures. Tensile elements 600 can be inlaid during the unitary knit construction of knitted component 100 such that a first cable 608 is disposed in the tunnel of first tubular structure 602 and a second cable 610 is disposed in the tunnel of second tubular structure 604. First cable 608 and second cable 610 are shown independent of one another. However, in some embodiments, first cable 608 and second cable 610 may be comprised of a single, continuous length of cable.

Tensile elements 600 may extend along one or more tubular rib structures, as shown in FIG. 7. In different embodiments, tensile elements 600 may be arranged in various configurations though knitted component 100. Tensile elements 600 may be present in some or all tubular rib structures. Tensile elements 600 may be arranged in various patterns or at varying intervals along knitted component 100. In FIG. 7, a knitted component 100 is shown with tensile elements 600 disposed along the tunnels of half of the depicted tubular rib structures, or in this case, three of the six tubular rib structures. In the embodiment of FIG. 7, a first cable 702, a second cable 704, and a third cable 706 are shown. First cable 702 extends along the tunnel 714 of first tubular structure 146, second cable 704 extends along the tunnel 720 of fourth tubular structure 434, and third cable 706 extends along the tunnel 718 of third tubular structure 432. It is important to note that while first cable 702, second cable 704, and third cable 706 are depicted as independent of one another, in some embodiments, first cable 702, second cable 704, and third cable 706 may be comprised of a single, continuous length of cable. In other words, a single cable may emerge from tunnel 714 of first tubular structure 146 and return to knitted component 100 by entering, for example, tunnel 720 in adjacent fourth tubular structure 434, and continue in such a manner through any number of additional tubular rib structures.

In other embodiments, knitted component 100 may include tensile elements 600 in fewer tunnels or more tunnels. In one embodiment, tensile elements 600 may be disposed in tubular rib structures 126 that neighbor one another. In another embodiment, tensile elements 600 may be present in a majority of tubular rib structures 126, or in

16

all tubular rib structures 126, of knitted component 100. In one embodiment, tensile elements 600 may be disposed in tubular rib structures 126 that are more distant from one another. In another embodiment, tensile elements 600 may occur in every other tubular structure 126, to form a staggered, or alternating, arrangement. Thus, tubular rib structures 126 that contain tensile elements 600 may be adjacent to tubular rib structures 126 that do not contain tensile elements 600. In other embodiments, the presence of tensile elements 600 may not be as regular. For example, there may be two or more tubular rib structures 126 that contain tensile elements 600, and these can be adjacent to one or more tubular rib structures 126 that do not contain tensile elements 600. Additionally, there may be one or more tubular rib structures 126 that contain tensile elements 600, and these may be adjacent to two or more tubular rib structures 126 that do not contain tensile elements 600. In other embodiments, knitted component 100 may include tensile elements 600 in one region of knitted component 100 and include no tensile elements 600 in another region of knitted component 100. In still other embodiments, knitted component 100 may include no tensile elements 600.

In different embodiments, tensile elements 600 may be formed from a variety of materials. Tensile elements 600 may comprise various materials, including rope, thread, webbing, cable, yarn, strand, filament, or chain, for example. In some embodiments, tensile elements 600 may be formed from material that may be utilized in a knitting machine or other device that forms knitted component 100. Tensile elements 600 may be a generally elongated fiber or strand exhibiting a length that is substantially greater than a width and a thickness. Accordingly, suitable materials for tensile elements 600 include various filaments, fibers, and yarns, that are formed from rayon, nylon, polyester, polyacrylic, silk, cotton, carbon, glass, aramids (e.g., para-aramid fibers and meta-aramid fibers), ultra high molecular weight polyethylene, and liquid crystal polymer. In comparison with the yarns forming the knitted component, the thickness of the tensile elements may be greater. In some configurations, the tensile element may have a significantly greater thickness than the yarns of the knitted component. Although the cross-sectional shape of a tensile element may be round, triangular, square, rectangular, elliptical, or irregular shapes may also be used. Moreover, the materials forming a tensile element may include any of the materials for the yarn within a knitted component, including, but not limited to: cotton, elastane, polyester, rayon, wool, nylon, and other suitable materials. Although tensile elements 600 may have a cross-section where width in lateral direction 104 and thickness direction 106 are substantially equal (e.g., a round or square cross-section), some tensile elements may have a width that is somewhat greater than their thickness (e.g., a rectangular, oval, or otherwise elongated cross-section).

In different embodiments, size and length of tensile elements 600 may vary. In some embodiments, tensile elements 600 may extend across the length of one or more tubular rib structures. In other embodiments, tensile elements 600 may extend only partway across the length of one or more tubular rib structures. In another embodiment, tensile elements 600 may extend beyond the length of one or more tubular rib structures. In some embodiments, first cable 702 may comprise a first length in some tubular rib structures and second cable 704 may comprise a second length in other tubular rib structures. For example, in one embodiment, first cable 702 may extend partway across the length of one or more tubular rib structures, second cable 704 may extend across the full

17

length of another tubular structure, while third cable 706 may extend beyond the length of a tubular structure.

In different embodiments, end portions of tensile elements 600 can enter and/or exit first longitudinal ends 134 of tubular rib structures and/or second longitudinal ends 136 of tubular rib structures. Tensile elements 600 may be adjusted in tautness, length, friction, or other aspects. In some embodiments, a tensile element may be anchored at any point along its length to stabilize or inhibit the movement of the tensile element. For example, in some cases, tensile elements 600 may be anchored at one or more longitudinal ends, to prevent their ends from being pulled through one of the tubular rib structures beyond a designated point. In other cases, a single tensile element may be looped through two or more tubular rib structures, which may prevent tensile elements from being pulled into tubular rib structures beyond a certain point.

In different embodiments, resistance between tensile elements 600 and the inner surface of tubular rib structures 126 may be adjusted. Friction may be altered through various configurations of tubular rib structures 126 and/or tensile elements 600. This may permit tensile elements 600 to move through the tunnels with varying levels of tension or compression. Depending on the preferred level of stiffness, the amount of contact between tensile elements 600 and the inner surface of tubular rib structures 126 may be adjusted.

It should be understood that in different embodiments, one or more alterations may be made to webbed areas 128, tubular rib structures 126, or tensile elements 600 in order to adjust the resistance between tensile elements 600 and knitted component 100, including those described above. Some embodiments may allow other configurations. For example, in one embodiment, the diameter of a cable may be increased, while the lateral length of one or more knit layers of the tubular rib structures corresponding with the tensile element may be decreased. In another embodiment, the thickness of one or more knit layers may be decreased, and/or the diameter of the tensile element associated with those knit layers may be increased.

Referring now to FIG. 8, a portion of knitted component 100 is illustrated in detail in a flattened configuration. As shown, knitted component 100 can include one or more yarns, strands, monofilaments, compound filaments, or other strands that are knitted to define knitted component 100. A yarn 808 can be knitted and stitched to define a plurality of successive courses 800 and a plurality of successive wales 802. In some embodiments, courses 800 can extend generally in longitudinal direction 102, and wales 802 can extend generally in lateral direction 104.

A representative portion of webbed area 128 and a representative portion of a knit layer of tubular rib structure 126 are also indicated in FIG. 8. In this flattened configuration, tubular rib structure 126 is shown in a two dimensional state for purposes of illustration, the three dimensional configuration of tubular rib structure 126 is shown in phantom. As shown, the plurality of courses 800 of knitted component 100 can include a plurality of web courses 806 that define webbed area 128. Also, as shown, the plurality of courses 800 of knitted component 100 can include a plurality of tubular courses 804 that help to define tubular rib structure 126. In some embodiments, web courses 806 can extend in the same direction as web axis 130, and tubular courses 804 can extend in the same direction as tubular axis 132, also referred to in FIGS. 1 and 2.

The knitting pattern of webbed area 128 can be opposite the knitting pattern of tubular rib structure 126. For example, one or more portions of tubular rib structure 126 can be

18

knitted using a front jersey knit pattern, and one or more portions of webbed area 128 can be knitted using a reverse jersey knit pattern. In other embodiments, tubular rib structure 126 can be knitted using a reverse jersey stitching pattern, and webbed area 128 can be knitted using a front jersey stitching pattern. It will be appreciated that the inherent biasing provided by this type of knitting pattern can at least partially cause the biased curling, rolling, folding, or compacting behavior of webbed areas 128 and tubular rib structures 126. Also, it will be appreciated that in some embodiments, webbed area 128 may be stitched in an opposite pattern from one knit layer of tubular rib structure 126.

In an exemplary embodiment, during the knitting process, at least one tubular course 804 may be joined by knitting to at least one web course 806 so as to form a loop and close tubular rib structure 126. For example, as shown in FIG. 8, a first portion 850 of one tubular course 804 forming tubular rib structure 126 may be joined by knitting to an attachment portion 852 of one web course 806. First portion 850 and attachment portion 852 may be joined by knitting with yarn across both of the front bed and back bed of the knitting machine to interloop portions of each of tubular course 804 and web course 806. With this arrangement, tubular rib structure 126 may move from a substantially flattened, two-dimensional configuration to a raised, three-dimensional configuration, as shown in FIGS. 1 through 7.

Webbed areas 128 can include any number of web courses 806, and tubular rib structures 126 can include any number of tubular courses 804. In the embodiment of FIG. 8, webbed area 128 includes four web courses 806, and the depicted knit layer of tubular structure 126 includes four tubular courses 804. However, the number of web courses 806 and tubular courses 804 can be different from the embodiment of FIG. 8. For example, in other embodiments, webbed area 128 can include five to ten web courses 806, and a single knit layer of tubular structure 126 can include five to ten tubular courses 804. Also, the curvature of webbed area 128 can be affected by the number of web courses 806 that are included, and the curvature of tubular rib structure 126 can be affected by the number of tubular courses 804 that are included. More specifically, by increasing the number of web courses 806, the width, curvature and/or stretchability of webbed areas 128 can be increased. Likewise, by increasing the number of tubular courses 804, the width and/or curvature of some or all of tubular rib structures 126 can be increased. The number of web courses 806 within webbed area 128 can be chosen to provide enough fabric to allow webbed area 128 sufficient elasticity. The number of tubular courses 804 within tubular structure 126 can be chosen to provide enough fabric to allow some or all of tubular structure 126 to sufficiently curl to form a hollow tube.

In some embodiments, yarn 808 can be made from a material or otherwise constructed to enhance the resiliency of the webbed areas 128 and tubular rib structures 126. Yarn 808 can be made out of any suitable material, such as cotton, elastane, polymeric material, or combinations of two or more materials. Also, in some embodiments, yarn 808 can be stretchable and elastic. As such, yarn 808 can be stretched considerably in length and can be biased to recover to its original, neutral length. In some embodiments, yarn 808 can stretch elastically to increase in length at least 25% from its neutral length without breaking. Furthermore, in some embodiments, yarn 808 can elastically increase in length at least 50% from its neutral length. Moreover, in some embodiments, yarn 808 can elastically increase in length at

19

least 75% from its neutral length. Still further, in some embodiments, yarn **808** can elastically increase in length at least 100% from its neutral length. Accordingly, the elasticity of yarn **808** can enhance the overall resilience of knitted component **100**.

Additionally, in some embodiments, knitted component **100** can be knitted using a plurality of different yarns. For example, in FIG. **8**, at least one portion of webbed area **128** can be knitted using a first yarn **810**, and at least one portion of tubular structure **126** can be knitted using a second yarn **812**. In some embodiments, first yarn **810** and second yarn **812** can differ in at least one characteristic. For example, first yarn **810** and second yarn **812** can differ in appearance, diameter, denier, elasticity, texture, or other characteristic. In some embodiments, first yarn **810** and second yarn **812** can differ in color. Thus, in some embodiments, when a viewer is looking at front surface **108** when knitted component **100** is in the first position of FIGS. **1** and **4**, first yarn **810** can be visible and second yarn **812** can be hidden from view. Then, when knitted component **100** stretches to the position of FIGS. **2** and **5**, second yarn **812** can be revealed. Thus, the appearance of knitted component **100** can vary, and first yarn **810** and second yarn **812** can provide striking visual contrast that is aesthetically appealing.

In another embodiment, in at least some portions of knitted component **100**, the elasticity of first yarn **810** is greater than the elasticity of second yarn **812**. This can result in one or more portions of knitted component **100** comprising webbed areas **128** that can have a greater capacity for stretch than tubular rib structures **126**.

Knitted component **100** can be manufactured using any suitable machine, implement, and technique. For example, in some embodiments, knitted component **100** can be automatically manufactured using a knitting machine, such as the knitting machine **900** shown in FIG. **9**. Knitting machine **900** can be of any suitable type, such as a flat knitting machine. However, it will be appreciated that knitting machine **900** could be of another type without departing from the scope of the present disclosure.

As shown in the embodiment of FIG. **9**, knitting machine **900** can include a front needle bed **902** with a plurality of front needles **904** and a rear needle bed **906** with a plurality of rear needles **908**. Front needles **904** can be arranged in a common plane, and rear needles **908** can be arranged in a different common plane that intersects the plane of front needles **904**. Front needle bed **902** and rear needle bed **906** may be angled with respect to each other. In some embodiments, front needle bed **902** and rear needle bed **906** may be angled so they form a V-bed. Knitting machine **900** can further include one or more feeders that are configured to move over front needle bed **902** and rear needle bed **906**. In FIG. **9**, a first feeder **910** and a second feeder **912** are indicated. As first feeder **910** moves, first feeder **910** can deliver first yarn **810** to front needles **904** and/or rear needles **908** for knitting knitted component **100**. As second feeder **912** moves, second feeder **912** can deliver second yarn **812** to front needles **904** and/or rear needles **908**.

A pair of rails, including a forward rail **920** and a rear rail **922**, may extend above and parallel to the intersection of front needle bed **902** and rear needle bed **906**. Rails may provide attachment points for feeders. Forward rail **920** and rear rail **922** may each have two sides, each of which accommodates one or more feeders. As depicted, forward rail **920** includes first feeder **910** and second feeder **912** on opposite sides, and rear rail **922** includes third feeder **914**. Although two rails are depicted, further configurations of

20

knitting machine **900** may incorporate additional rails to provide attachment points for more feeders.

Feeders can move along forward rail **920** and rear rail **922**, thereby supplying yarns to needles. As shown in FIG. **9**, yarns are provided to a feeder by a first spool **916** and/or a second spool **918**. More particularly, first yarn **810** extends from first spool **916** to first feeder **910**, and second yarn **812** extends from second spool **918** to second feeder **912**. Although not depicted, additional spools may be used to provide yarns to feeders in a substantially similar manner as first spool **916** and second spool **918**.

In some embodiments, webbed areas **128** can be formed using either front needles **904** of front needle bed **902** or rear needles **908** of rear needle bed **906**. Tubular rib structures can be formed using the needles of both front needle bed **902** and rear needle bed **906**.

In some embodiments, an exemplary process for knitting a tubular rib structure between successive webbed areas **128** may be performed using knitting machine **900**. FIGS. **10A** and **10B** illustrate representative knitting diagrams or looping diagrams of an exemplary knitting process for forming a tubular rib structure, for example, tubular rib structure **126** of knitted component **100**. In one embodiment, represented in FIG. **10A**, webbed area **128** can be formed from first yarn **810** using rear needle bed **906**, followed by tubular rib structure **126** being formed from second yarn **812** using rear needle bed **906** and front needle bed **902**, and another webbed area **128** being formed from first yarn **810** using rear needle bed **906**. The following discussion describes the knitting process schematically illustrated in FIGS. **10A-10B** and it will be understood that the front needle bed **902** and rear needle bed **906** referred to in this discussion are shown schematically in FIG. **9**.

Referring again to FIG. **10A**, after formation of webbed area **128**, a course may be formed extending between rear needle bed **906** and front needle bed **902**. Next, one or more courses may be knit on the front needle bed **902**. For example, courses forming the first curved portion of tubular rib structure **126** can be formed using second yarn **812** on front needle bed **902**. Next, after a final course **1000** on front needle bed **902**, second yarn **812** forming tubular rib structure **126** may be used to knit a course **1002** with rear needle bed **906**. For example, course **1002** may form the second curved portion of tubular rib structure **126** that closes tubular rib structure **126** and forms a hollow tunnel. After course **1002** completes the formation of tubular rib structure **126**, another course **1004** may be formed extending between rear needle bed **906** and front needle bed **902** that is interlooped to the previous final course **1000** on the front needle bed **902** and course **1002** on rear needle bed **906**. By using a stitch at course **1004** that extends between rear needle bed **906** and front needle bed **902**, second yarn **812** forming tubular rib structure **126** can be prepared to be associated with additional courses forming another webbed area **128** with first yarn **810** using rear needle bed **906**.

In this embodiment, tubular rib structure **126** may be formed using one course knit on rear needle bed **906** and five courses knit on front needle bed **902**. With this configuration, the elongated cylindrical shape of tubular rib structure **126** may be provided.

In other embodiments, different numbers of courses may be knit on one or both of front needle bed **902** and rear needle bed **906** so as to change the shape and/or size of the tubular rib structure **126**. In some cases, by increasing or decreasing the number of courses knit on the rear needle bed **906** and/or front needle bed **902** the size of the tubular rib structure **126** may be correspondingly enlarged or reduced.

21

In other cases, by increasing the number of courses knit on one of the rear needle bed **906** or front needle bed **902** relative to the other, the shape of the tubular rib structure **126** may be altered. For example, by increasing the number of courses knit on the rear needle bed **906**, the shape of tubular rib structure **126** may be changed so as to round out the curvature on the back surface **110** of knitted component **100** to be similar to the curvature on the front surface **108** of knitted component **100**.

After the completion of tubular rib structure **126**, the process may then repeat to form another webbed area **128**. Subsequently, an additional webbed area **128** can be added to knitted component **100** using rear needle bed **906**, and so on until a completed knitted component **100** is formed having the desired number of webbed areas **128** and tubular rib structures **126**.

In other embodiments, the formation of knitted component **100** may be similar but entail a switch in the needle beds used. For example, the process shown in FIGS. **10A** and **10B** may be performed using opposite needle beds, such that webbed area **128** can be formed using front needle bed **902** and then the portion of knitted component **100** can be transferred from front needle bed **902** to rear needle bed **906**. The remaining steps shown in FIGS. **10A** and **10B** can be performed in identical order using the opposite needle bed than illustrated. Other methods of using the various needle beds of knitting machine **900** to form webbed areas **128** and tubular rib structures **126** will be apparent to one of ordinary skill in the art based on the above description.

In the exemplary process described in reference to FIG. **10A**, a hollow tubular rib structure **126** is formed. In other embodiments, a tensile element may be inlaid within the unsecured central area of one or more tubular rib structures **126**. FIG. **10B** illustrates an exemplary process for forming tubular rib structure **126** including an inlaid tensile element. As shown in FIG. **10B**, the process is substantially similar as the process for forming hollow tubular rib structure **126** illustrated in FIG. **10A**. However, in the process of FIG. **10B**, after forming course **1002** on rear needle bed **906**, tensile element **600** is inlaid within a portion of tubular rib structure **126**. Tensile element **600** may be inlaid using a combination feeder and associated method of inlaying described in U.S. Patent Application Publication No. 2012/0234052, the disclosure of which application is incorporated herein in its entirety.

After tensile element **600** is inlaid within the portion of tubular rib structure **126**, an additional course **1004** may be knit using second yarn **812** to complete the formation of tubular rib structure **126**. With this configuration, tensile element **600** is contained within tubular rib structure **126** and is disposed through the unsecured central area running along the length of tubular rib structure **126**.

FIGS. **11-17** further illustrate the process of knitting a knitted component **1100** having a plurality of webbed areas and a plurality of tubular rib structures. FIGS. **11-17** are merely exemplary representative illustrations of the process used to knit the various portions of knitted component **1100**. Additional steps or processes not shown here may be used to form a completed knitted component that is to be incorporated into an upper for an article of footwear. In addition, only a relatively small section of a knitted component **1100** may be shown in the Figures in order to better illustrate the knit structure of the various portions of knitted component **1100**. Moreover, the scale or proportions of the various elements of knitting machine **900** and knitted component **1100** may be enhanced to better illustrate the knitting process.

22

It should be understood that although knitted component **1100** is formed between front needle bed **902** and rear needle bed **906**, for purposes of illustration, in FIGS. **11** through **17**, knitted component **1100** is shown adjacent to front needle bed **902** and rear needle bed **906** to (a) be more visible during discussion of the knitting process and (b) show the position of portions of the knitted component relative to each other and needle beds. The front needles and rear needles are not depicted in FIGS. **11-17** for purposes of clarity. Also, although one rail, and limited numbers of feeders are depicted, additional rails, feeders, and spools may be used. Accordingly, the general structure of knitting machine **900** is simplified for purposes of explaining the knitting process.

Referring to FIG. **11**, a portion of knitting machine **900** is shown. In this embodiment, knitting machine **900** may include a first feeder **910** and a second feeder **912**. In other embodiments, additional feeders may be used and may be located on the front or rear side of forward rail **920** and/or rear rail **922**.

In FIG. **11**, first yarn **810** from a spool (not shown) passes through first feeder **910** and an end of first yarn **810** extends outward from a dispensing tip at the end of first feeder **910**. Any type of yarn (e.g., filament, thread, rope, webbing, cable, chain, or strand) may pass through first feeder **910**. Second yarn **812** similarly passes through second feeder **912** and extends outward from a dispensing tip. In some embodiments, first yarn **810** and second yarn **812** may be used to form portions of knitted component **1100**.

In different embodiments, the knitting process may begin with formation of either a webbed area or a tubular rib structure. Each webbed area or tubular rib structure may be referred to as a section of knitted component **1100**. Completion of one webbed area or tubular rib structure may be followed by formation of a second webbed area or tubular rib structure. Multiple sections of knitted component **1100** may be formed in an alternating manner between webbed areas and tubular rib structures. This knitting process may continue until knitted component **1100** is fully formed.

In the embodiment of FIG. **11**, three sections of knitted component **1100** have been formed by knitting machine **900**, including a first tubular structure **1102**, a first webbed area **1104**, and a second tubular structure **1106**. Additionally, formation of a second webbed area **1108** is proceeding on knitting machine **900**. As described earlier, webbed areas may be knit by either the front needle bed **902** or the rear needle bed **906** of knitting machine **900**. First feeder **910** is positioned along an unfinished fourth edge **122** of knitted component **1100**. First feeder **910** may feed first yarn **810** to either front needle bed **902** or rear needle bed **906**. Front needle bed **902** or rear needle bed **906** can receive first yarn **810** and form loops that define the courses of second webbed area **1108**. Below the machine in the illustration, knitted component **1100**, as it is being formed, is depicted in an isometric view.

In the subsequent illustration of FIG. **12**, four sections of knitted component **1100** have been formed by knitting machine **900**, including first tubular rib structure **1102**, first webbed area **1104**, second tubular rib structure **1106**, and second webbed area **1108**. Formation of a third tubular rib structure **1200** is proceeding on knitting machine **900**. As described earlier, tubular rib structures may be knit by both the front needle bed **902** and the rear needle bed **906** of knitting machine **900**. First feeder **910** and second feeder **912** are positioned near unfinished fourth edge **122** of knitted component **1100**. First feeder **910** may feed first yarn **810** to either front needle bed **902** or rear needle bed **906**. In

23

some embodiments, front needle bed **902** can receive first yarn **810** and form loops that define the courses forming first curved portion **416** of third tubular rib structure **1200**. In other embodiments, rear needle bed **906** can receive first yarn **810** and form loops that define courses of first curved portion **416** of third tubular rib structure **1200**. Below the machine in the illustration, knitted component **1100** is depicted in an isometric view as it is being formed.

In different embodiments, the various areas of tubular rib structures may be formed by different elements of knitting machine **900**. In an exemplary embodiment, first curved portion **416** may be formed by front needle bed **902**, and second curved portion **418** may be formed by rear needle bed **906**, so that first feeder **910** feeds first yarn **810** to front needle bed **902**, and second feeder **912** feeds second yarn **812** to rear needle bed **906**. In another embodiment, first curved portion **416** may be formed by rear needle bed **906**, and second curved portion **418** may be formed by front needle bed **902**, so that first feeder **910** feeds first yarn **810** to rear needle bed **906**, and second feeder **912** feeds second yarn **812** to front needle bed **902**.

FIG. **13** depicts the formation of a knitted component **1100** with eleven sections, including six tubular rib structures and five webbed areas. In an exemplary embodiment, each webbed area is disposed between two adjacent tubular rib structures on either side of the webbed area. The knitting process can be continued and the desired amount of webbed areas and tubular rib structures can be formed until knitted component **1100** is complete with the desired dimensions. Additionally, other known knitting processes and methods may be used to form various other portions of knitted component **1100**.

In different embodiments, a knitting process may include the incorporation of one or more tensile elements within portions of knitted component **1100**. Referring to FIGS. **14-17**, an embodiment of a knitted component **1100** including tensile elements is depicted. In FIG. **14**, knitted component **1100** has been formed with eleven sections, including five completed tubular rib structures, five webbed areas, and a partially formed sixth tubular rib structure. Each completed tubular rib structure in this illustration can be seen including a tensile element extending through the hollow central unsecured area of the tubular rib structure. As described earlier, it should be understood that there may be various tensile element arrangements included in knitted component **1100**. For example, in some embodiments, tensile elements may be disposed through a selected number of the total number of tubular rib structures associated with a knitted component. With this arrangement, additional support and resistance to stretch may be selectively provided by the desired placement of tensile elements within the tubular rib structures.

Referring again to FIG. **14**, formation of a sixth tubular rib structure **1404** is underway. As described earlier, tubular rib structures may be knit by both the front needle bed **902** and the rear needle bed **906** of knitting machine **900**. First feeder **910** and second feeder **912** are positioned along unfinished fourth edge **122** of knitted component **1100**. Second feeder **912** may feed second yarn **812** to either front needle bed **902** or rear needle bed **906**. In some embodiments, front needle bed **902** can receive second yarn **812** and form loops that define first curved portion **416** of sixth tubular rib structure **1404**. In other embodiments, rear needle bed **906** can receive second yarn **812** and form loops that define first curved portion **416** of sixth tubular rib structure **1404**.

Specifically, in one embodiment, first curved portion **416** may be formed by front needle bed **902**, and second curved

24

portion **418** may be formed by rear needle bed **906** so that second feeder **912** supplies second yarn **812** to front needle bed **902**, and second feeder **912** also supplies second yarn **812** to rear needle bed **906**. It should be understood that the choice of needle bed, feeder, and/or yarn used to form each portion of knitted component **1100** may be varied. For example, in another embodiment, the portions of sixth tubular rib structure **1404** may be formed using opposite needle beds, as described above, so that first curved portion **416** may be formed by rear needle bed **906**, and second curved portion **418** may be formed by front needle bed **902**. Additionally, in other embodiments, the same yarn that is used to form webbed areas may similarly be used to form tubular rib structures, so that first feeder **910** supplies first yarn **810** to front needle bed **902** and rear needle bed **906** to use in forming sixth tubular rib structure **1404**. Below knitting machine **900**, knitted component **1100** as it is being formed is depicted in an isometric view.

First feeder **910** and second feeder **912** can be returned to a start position along fourth edge **122** of knitted component **1100** to begin the next course forming a portion of sixth tubular rib structure **1404**. Following this step, third feeder **914** supplies a tensile element **1500** to be inlaid within knitted component **1100**, as shown in FIG. **15**. In some embodiments, third feeder **914** may move along forward rail **920** or rear rail **922** as it supplies and inlays tensile element **1500** along the length of sixth tubular rib structure **1404**. In different embodiments, first curved portion **416** and/or second curved portion **418** of sixth tubular rib structure **1404** may continue to be formed as tensile element **1500** is inlaid along inner surface of sixth tubular rib structure **1404**. In FIG. **15**, tensile element **1500** has been inlaid along the length of sixth tubular rib structure **1404**.

First feeder **910** and second feeder **912** may begin another course forming a portion of sixth tubular rib structure **1404** in some embodiments. In FIG. **16**, sixth tubular rib structure **1404** is being completed by further courses to fully form sixth tubular rib structure **1404** and thereby enclose tensile element **1500** within the interior of the hollow unsecured central area of sixth tubular rib structure **1404**. FIG. **17** depicts the formation of knitted component **1100** comprising six tubular rib structures including tensile elements separated by five webbed areas between each successive tubular rib structure. Additionally, it should be understood that tubular rib structures that do not include tensile elements may also be included. This process can be continued and the desired amount of webbed areas and tubular rib structures with or without tensile elements can be formed until knitted component **1100** is complete.

Using this exemplary process for forming knitted components, manufacture of knitted component **1100** can be efficient. Also, knitted component **1100** can be substantially formed without having to form a significant amount of waste material.

As discussed earlier, in different embodiments, one or more webbed areas and/or tubular rib structures can move away from a compacted or neutral position toward a more extended or stretched position. FIGS. **18** and **19** depict how a compression load or force may deform one area of an embodiment of a knitted component **1808**. As described previously, under the influence of a compression load, ribbed features, i.e., a series of alternating webbed areas and tubular rib structures, can move away from a compacted position, seen in FIG. **18**, toward a more extended position, seen in FIG. **19**. In some embodiments, upon removal or reduction of the compression load, the ribbed features can recover and return to the compacted position. It will be

25

appreciated that knitted component **1808** can cushion, attenuate, or otherwise reduce the compression load as a result of this resilience.

In FIG. **18**, a portion of an embodiment of knitted component **1808** is shown in a neutral position, similar to the embodiment of FIG. **1**. Several tubular rib structures **1802** and webbed areas **1800** are shown. Knitted component **1808** is at a first width **1806**. In FIG. **19**, the same webbed areas **1800** and tubular rib structures **1802** are shown as they respond to a compressive load, and knitted component is stretched to a second width **1900**, similar to FIG. **2**. First width **1806** is less than second width **1900**. In some embodiments, webbed areas **1800** may exhibit greater stretching than tubular rib structures **1802**. In one embodiment, depending on the amount of force applied, and the location of the force application, some areas of knitted component **1808** may stretch further than other areas. In FIG. **19**, there is greater stretch in lateral direction **104** than longitudinal direction **102**.

Moreover, in some embodiments, ribbed features can differ in size, structure, shape, and other characteristic along different areas of knitted component **1808**. For example, in the embodiments of FIGS. **18** and **19**, different widths of webbed areas are depicted in knitted component **1808**, including a first width **1810** and a second width **1804**. First width **1810** is larger than second width **1804**. The width of each webbed area may be determined during the knitting process by changing the number of courses that are knit for each webbed area. For example, in embodiments where first width **1810** is larger than second width **1804**, the larger width of the webbed area may be due to a larger number of courses forming the webbed area having first width **1810**. Similarly, a smaller width of the webbed area may be due to a smaller number of courses forming the webbed area having second width **1804**. In other embodiments, the width of webbed areas **1800** and/or tubular rib structures **1802** can vary across knitted component **1808**. As the size of ribbed features increase or decrease, the stretch and resilience available in knitted component **1808** can be altered. For example, areas with webbed areas **1800** comprising greater width (for example, first width **1810**) may be more elastic and permit further stretch relative to webbed areas **1800** of smaller width (for example, second width **1804**).

A knitted component can define and/or can be included in any suitable article. Knitted components can provide resilience to an article. As such, an article can be at least partially stretchable and elastic in some embodiments. In addition, an article can provide cushioning for the user due to the inclusion of one or more knitted component pieces.

In different embodiments, a knitted component can be used to form various components or elements for an article of footwear. An embodiment of an upper **2000** for an article of footwear is illustrated in FIG. **20**. Upper **2000** comprises a knitted component **2002**, which can include one or more features of the knitted component of FIGS. **1-8**. Upper **2000** comprises an irregular shape that is designed to allow upper **2000** to be assembled through a wrapping process, further described below. Generally, upper **2000** includes a first end **2004** and a second end **2006**, representing two opposing sides along longitudinal direction **102**, as well as a top edge **2010** and a bottom edge **2012**. Upper **2000** additionally includes a collar portion **2014**, a throat portion **2016**, and a lower region **2020**. Collar portion **2014** may include a first side **2030** and a second side **2032** representing generally opposing ends of collar portion **2014**. Throat portion **2016** may end on one side at a throat opening **2040**. Lower region **2020** includes the portion of knitted component **2002** nearer

26

to bottom edge **2012**, while throat portion **2016** includes the portion nearer to top edge **2010**. Lower region **2020** generally extends from first end **2004** to second end **2006**, while throat portion **2016** generally extends from first end **2004** to throat opening **2040**. Thus in the embodiment of FIG. **20**, ribbed features, i.e., webbed areas and tubular rib structures, disposed in lower region **2020** are of longer length in longitudinal direction **102** than ribbed features disposed in throat portion **2016**. In other words, ribbed features disposed in lower region **2020** run continuously from first end **2004** to second end **2006**, and ribbed features in throat portion **2016** run continuously from first end **2004** to the area along throat opening **2040**.

Knitted component **2002** further comprises a first portion **2022**, a second portion **2024**, a third portion **2026**, and a fourth portion **2028**. First portion **2022** runs from first end **2004** to a first boundary **2034**. Second portion **2024** runs from first boundary **2034** to a second boundary **2036**. Third portion **2026** runs from second boundary **2036** to a third boundary **2038**. Fourth portion **2028** runs from third boundary **2038** to second end **2006** of knitted component **2002**. In some embodiments, throat portion **2016** of knitted component **2002** can include a different number of tubular rib structures and/or webbed areas than the remaining region of knitted component **2002**. In some embodiments, one or more tensile elements **2018** may be included in upper **2000**.

It will be understood that first boundary **2034**, second boundary **2036**, and third boundary **2038** are only intended for purposes of description and are not intended to demarcate precise regions of the components.

FIGS. **21-24** illustrate an embodiment of an exemplary process of assembling upper **2000** incorporating knitted component **2002** for use in an article of footwear. For reference purposes, various components associated with the article of footwear may also be associated with different regions of the foot. Components associated with an article of footwear may include an upper, a sole, a tongue, laces, toe and/or heel counters, an article forming member, or other individual elements associated with footwear. Article forming members may include, but are not limited to, a last, a mold, a foundational element, a cast, or other such devices and/or pieces.

In FIG. **21**, upper **2000** is shown being associated with article forming member **2100**. Article forming member **2100**, as well as other components associated with footwear, may be divided into various regions that are representative of the various regions of a finished article of footwear. In the embodiment of FIGS. **21-24**, article forming member **2100** is divided into six general regions: a forefoot region **2112**, a midfoot region **2102**, a vamp region **2106**, a heel region **2104**, a sole area **2124**, and an ankle region **2114**. Forefoot region **2112** generally includes portions of footwear corresponding with the toes and the joints connecting the metatarsals with the phalanges. Midfoot region **2102** generally includes portions of footwear or component corresponding with an arch area of a foot. Vamp region **2106** generally includes portions covering the front and top of a foot, extending from the toes to the area where the foot joins the ankle. Heel region **2104** generally corresponds with rear portions of the foot, including the calcaneus bone. Sole area **2124** generally includes the area corresponding with the sole of a foot. Sole area **2124** is typically associated with the ground-engaging surface of an article of footwear. Ankle region **2114** generally includes portions of footwear or component corresponding with an ankle and the area where the ankle joins the foot. Throat opening **2040** may be associated with ankle region **2114**.

27

For consistency and convenience, directional adjectives are employed throughout this detailed description corresponding to the illustrated embodiments. The term forward direction (“forward”) refers to a direction toward forefoot region **2112**, or toward the toes when an article of footwear is worn on the foot. The term rearward direction (“rearward”) refers to a direction extending toward heel region **2104**, or toward the back of a foot when an article of footwear is worn on the foot. There may also be an upward direction and a downward direction, corresponding with opposite directions. The term upward direction (“upward”) is the vertical direction, moving from sole area **2124** toward the upper when viewing an article of footwear. The term downward direction (“downward”) refers to a direction moving from the upper toward the sole area **2124** when viewing an article of footwear.

Components associated with footwear, such as article forming member **2100**, may also include a lateral side **2108** and a medial side **2110**, which extend through each of forefoot region **2112**, midfoot region **2102**, and heel region **2104**, and correspond with opposite sides of an article associated with the foot. More particularly, lateral side **2108** corresponds with an outside area of the foot (i.e., the surface that faces away from the other foot), and medial side **2110** corresponds with an inside area of the foot (i.e., the surface that faces toward the other foot). Additionally, components associated with footwear may include a forward portion **2116**. Forward portion **2116** comprises the region forward of heel region **2104**.

It should be noted that the terms forefoot region **2112**, midfoot region **2102**, vamp region **2106**, heel region **2104**, sole area **2124**, ankle region **2114**, lateral side **2108**, medial side **2110**, and forward portion **2116** can be applied to various individual components associated with footwear, such as an upper, a sole structure, an article of footwear, an article forming member, and/or an upper. It will be understood that forefoot region **2112**, midfoot region **2102**, vamp region **2106**, heel region **2104**, sole area **2124**, ankle region **2114**, and forward portion **2116** are only intended for purposes of description and are not intended to demarcate precise regions of the components. Likewise, medial side **2110** and lateral side **2108** are intended to represent generally two sides of a component, rather than precisely demarcating the component into two halves.

In some embodiments, an article forming member **2100** can be used to facilitate assembly of an article. In other embodiments, different foundational elements or solid forms may be used in the process of assembly, most commonly including a last. In FIG. **21**, first end **2004** is removably attached to the underside of article forming member **2100** along forefoot region **2112** and partway along lateral side **2108** of midfoot region **2102**. First portion **2022** of upper **2000** is extended across article forming member **2100** so that it fully covers vamp region **2106**.

In FIG. **22**, upper **2000** is shown as it is further extended over article forming member **2100**. Second portion **2024** is placed on the area corresponding to medial side **2110** of article forming member **2100**. A portion of bottom edge **2012** of upper **2000** is removably attached to the underside of article forming member **2100** along medial side **2110**.

Following this step, upper **2000** is wrapped around heel region **2104**, illustrated in FIG. **23**. Third portion **2026** has been placed along the area corresponding to heel region **2104** of article forming member **2100**. A portion of bottom edge **2012** of upper **2000** is removably attached to the underside of article forming member **2100** along heel region **2104**.

28

In a next step, illustrated in FIG. **24**, upper **2000** is further wrapped so that fourth portion **2028** is brought around article forming member **2100**, and placed along lateral side **2108**. Throat opening **2040** may be formed when fourth portion **2028** meets first portion **2022**, hidden behind collar portion **2014** in FIG. **24**. A portion of second side **2032** of collar portion **2014** may meet, join, or otherwise become associated with a portion of first side **2030** of collar portion **2014**, covering throat opening **2040**. Similarly, a portion of second end **2006** may meet, join, or otherwise become associated with a portion of first end **2004** of upper **2000**. A portion of bottom edge **2012** of upper **2000** is removably attached to the underside of article forming member **2100** along lateral side **2108** of heel region **2104** and part of midfoot region **2102**.

FIGS. **25-27** illustrate an embodiment of an article of footwear (“footwear”) **2512** that includes an assembled upper **2500** comprising knitted component **2002** of FIG. **20**. In forming article of footwear **2512**, a sole structure (“sole”) **2514** can be secured to assembled upper **2500** along sole area **2124** and can extend between the wearer’s foot and the ground when footwear **2512** is worn. Sole **2514** may differ from the embodiments of FIGS. **25-27**. Sole **2514** can be a uniform, one-piece member in some embodiments. Alternatively, sole **2514** can include multiple components, such as an outsole, a midsole, and/or an insole, in some embodiments. Also, sole **2514** can include a ground-engaging surface.

Assembled upper **2500** can define a void that receives a foot of the wearer. Stated differently, assembled upper **2500** can define an interior surface that defines a void. When a wearer’s foot is received within the void, assembled upper **2500** can at least partially enclose and encapsulate the wearer’s foot. Assembled upper **2500** can also include a collar **2516** that may surround ankle region **2114**. Collar **2516** can include an opening that is configured to allow passage of the wearer’s foot during insertion or removal of the foot from the void.

An assembled upper **2500** that incorporates a knitted component may include various configurations of ribbed features, including differences in orientation, spacing, strands, size, and arrangement of webbed areas and/or tubular rib structures. In some embodiments, ribbed features can form a pattern of stripes or lines across portions of knitted component that follow a prevailing orientation. In other embodiments, the orientation of ribbed features may be in one direction across one portion of assembled upper **2500** and in another direction across a different portion of assembled upper **2500**. The orientation of ribbed features along different areas of upper **2500** may be arranged in directions that help provide footwear **2512** with improved structural reinforcement and resilience in each region.

FIGS. **25-27** depict possible orientations of ribbed features along assembled upper **2500** in footwear **2512**. It should be noted that in other embodiments, ribbed features can be oriented differently from the embodiments of FIGS. **25-27**. In the embodiment shown in FIG. **25**, five zones of assembled upper **2500** have been magnified to illustrate variations in the orientation and spacing of tubular rib structures **1802** and webbed areas **1800**.

In a first zone **2502**, tubular rib structures **1802** and webbed areas **1800** are oriented at an angle as they run from heel region **2104** and move downward and generally diagonally toward midfoot region **2102** along lateral side **2108** of footwear **2512**. The widths of tubular rib structures **1802** and webbed areas **1800** are generally regular and generally of the same size.

29

In a second zone **2504**, tubular rib structures **1802** and webbed areas **1800** are oriented at an angle as they run from heel region **2104** and move downward and generally diagonally toward second end **2006** along lateral side **2108**. In this case, while the widths of tubular rib structures **1802** and webbed areas **1800** are generally regular, webbed areas **1800** are substantially more narrow than webbed areas of first zone **2502**.

In a third zone **2506**, if viewer is looking at footwear **2512** from above, tubular rib structures **1802** and webbed areas **1800** run forward and toward lateral side **2109** in a generally diagonal manner as they extend along vamp region **2106** toward forefoot region **2112**. In this case, webbed areas **1800** include two different widths. Webbed areas **1800** of first width **1804** are substantially more narrow than webbed areas **1800** of second width **1810**. In addition, tubular rib structures **1802** broaden in the areas adjacent to webbed areas **1800** of first width **1810**. In other embodiments, tubular rib structures **1802** may remain of a substantially constant width while webbed areas **1800** include areas of varying widths. In some embodiments, tubular rib structures **1802** may change in width in some areas of assembled upper **2500** while webbed areas **1800** remain a substantially constant width in the same area.

In a fourth zone **2508**, if viewer is looking at footwear **2512** from above, tubular rib structures **1802** and webbed areas **1800** run forward and toward lateral side **2109** in a generally diagonal manner as they extend along vamp region **2106**, toward forefoot region **2112**. In this case, while the widths of tubular rib structures **1802** and webbed areas **1800** are generally regular, webbed areas **1800** are substantially more narrow than tubular rib structures **1802**. In addition, the widths of tubular rib structures **1802** in fourth zone **2508** can be seen to be less than widths of tubular rib structures **1802** in first zone **2502**.

In a fifth zone **2510**, if viewer is looking at footwear **2512** from above, tubular rib structures **1802** and webbed areas **1800** run forward and toward lateral side **2109** in a generally diagonal manner as they extend along vamp region **2106**, toward forefoot region **2112**. In this case, while the widths of tubular rib structures **1802** and webbed areas **1800** are generally regular, webbed areas **1800** are narrow to the extent that they may not be visible to viewer. In this case, webbed areas **1800** may comprise only one or two web courses. Thus, in some cases, tubular rib structures **1802** may appear to be directly adjacent to one another.

In different embodiments, the arrangements of ribbed features associated with first zone **2502**, second zone **2504**, third zone **2506**, fourth zone **2508**, and fifth zone **2510** may comprise specific orientations that can support and lend resilience to footwear **2512**. For example, first zone **2502** and second zone **2504** together depict an embodiment of tubular rib structures **1802** and webbed areas **1800** that correspond to fourth portion **2028** of knitted component **2002**. Therefore, when knitted component **2002** is incorporated into assembled upper **2500**, the ribbed features included in fourth portion **2028** can be referred to as following along a direction associated with a “fourth orientation”. The term fourth orientation, as used throughout this specification and the claims, refers to an arrangement of ribbed features where the tubular rib structures disposed along third boundary **2038** are located rearward and upward relative to the position of the tubular rib structures disposed along second end **2006** in assembled upper **2500**.

Furthermore, third zone **2506**, fourth zone **2508**, and fifth zone **2510** together illustrate an embodiment of tubular rib structures **1802** and webbed areas **1800** that correspond to

30

first portion **2022** of knitted component **2002**. Therefore, when knitted component **2002** is incorporated into assembled upper **2500**, the ribbed features included in first portion **2022** can be referred to as following along a direction associated with a “first orientation”. The term first orientation, as used throughout this specification and the claims, refers to an arrangement of ribbed features where the tubular rib structures disposed along first end **2004** (hidden behind fourth portion **2028** and collar **2516** in FIGS. **25-27**) are located forward and more toward lateral side **2108** relative to the position of the tubular rib structures disposed along first boundary **2034** in assembled upper **2500**. Moreover, it can be seen that the first orientation of ribbed features in first portion **2022** is different from the fourth orientation of ribbed features in fourth portion **2028**. Of course, other portions may be associated with still other orientations that may be similar or different from the first orientation and/or the fourth orientation.

In FIG. **26**, four zones of assembled upper **2500** have been magnified to illustrate variations in the orientation and spacing of tubular rib structures and webbed areas, as well as possible differences in material. In a sixth zone **2600**, tubular rib structures **1802** and webbed areas **1800** extend from forefoot region **2112** toward midfoot region **2102**, oriented so that they run relatively parallel to the curve of the periphery of sole **2514** along medial side **2110** in this area. The widths of tubular rib structures **1802** and webbed areas **1800** are generally regular and of substantially the same size.

In a seventh zone **2602**, tubular rib structures **1802** and webbed areas **1800** extend from midfoot region **2102** toward heel region **2104**, oriented so that they run relatively parallel to the curve of the periphery of sole **2514** along medial side **2110** in this area. In this case, while the widths of tubular rib structures **1802** and webbed areas **1800** are generally regular, webbed areas **1800** are substantially more narrow than webbed areas **1800** of sixth zone **2600**.

In an eighth zone **2604**, tubular rib structures **1802** and webbed areas **1800** extend in the rearward direction along medial side **2110** of heel region **2104**, and are oriented relatively parallel to the curve of the periphery of sole **2514** along medial side **2110** in this area. In this case, webbed areas **1800** include two different widths. Webbed areas **1800** with first width **1804** are substantially wider than webbed areas **1800** with second width **1810**. In addition, tubular rib structures **1802** are broader in the areas adjacent to webbed areas **1800** with second width **1810**. In other embodiments, tubular rib structures **1802** may remain at a substantially constant width while webbed areas **1800** include areas of varying widths. In some embodiments, tubular rib structures **1802** may change in width in some areas of assembled upper **2500** while webbed areas **1800** remain a substantially constant width in the same area. In other embodiments, both tubular rib structures **1802** and webbed areas **1800** may vary in width in the same area.

In different embodiments, the arrangements of ribbed features associated with sixth zone **2600**, seventh zone **2602**, eighth zone **2604**, and ninth zone **2606** may comprise specific orientations that can support and lend resilience to footwear **2512**. For example, sixth zone **2600**, seventh zone **2602**, and eighth zone **2604** depict an embodiment of tubular rib structures **1802** and webbed areas **1800** that correspond to second portion **2024** of knitted component **2002**. Therefore, when knitted component **2002** is incorporated into assembled upper **2500**, the ribbed features included in second portion **2024** can be referred to as following along a direction associated with a “second orientation”. The term second orientation, as used throughout this specification and

31

the claims, refers to an arrangement of ribbed features where the tubular rib structures disposed along first boundary **2034** are located forward relative to the position of the tubular rib structures disposed along second boundary **2036** in assembled upper **2500**.

In a ninth zone **2606**, one area of collar portion **2014** is magnified to depict one possible embodiment of the knit structure in this area. Collar portion **2014** may include ribbed features in some embodiments. In other embodiment, collar portion **2014** may comprise knitted material that does not include ribbed features. In one embodiment, illustrated in FIG. **26**, collar portion **2014** includes a mesh region. In some embodiments, collar portion **2014** may facilitate the securing of footwear **2512** to wearer's ankle.

In FIG. **27**, two zones of assembled upper **2500** have been magnified to illustrate variations in the orientation and spacing of tubular rib structures and webbed areas, as well as possible differences in material. In a tenth zone **2700**, tubular rib structures **1802** and webbed areas **1800** extend from medial side **2110** toward lateral side **2108**, and are oriented relatively parallel to the curve of periphery of sole **2514** along heel region **2104** in this area. In this case, the widths of tubular rib structures **1802** and webbed areas **1800** are generally regular, while webbed areas **1800** are more narrow than tubular rib structures **1802**.

In an eleventh zone **2702**, one area of collar portion **2014** is magnified to depict one possible embodiment of the knit structure in this area. In some embodiments, collar portion **2014** may comprise a plurality of intermeshed loops that define a variety of courses and wales. That is, knit element may have the structure of a knit textile with varying texture and construction. For example, in eleventh zone **2702**, a knitted mesh portion **2704** is present in collar portion **2014**, as well as a knitted solid portion **2706**.

In different embodiments, the arrangement of ribbed features associated with tenth zone **2700** may comprise specific orientations that can support and lend resilience to footwear **2512**. For example, tenth zone **2700** depicts an embodiment of tubular rib structures **1802** and webbed areas **1800** that correspond to third portion **2026** of knitted component **2002**. Therefore, when knitted component **2002** is incorporated into assembled upper **2500**, the ribbed features included in third portion **2026** can be referred to as following along a direction associated with a "third orientation". The term third orientation, as used throughout this specification and the claims, refers to an arrangement of ribbed features where the tubular rib structures disposed along second boundary **2036** are located more toward medial side **2110** relative to the position of the tubular rib structures disposed along third boundary **2038** in assembled upper **2500**, and where the tubular rib structures are substantially parallel to periphery of sole **2514** along heel region **2104**.

The varying orientation of ribbed features in different regions of article of footwear **2512** can provide a wearer with increased support, stability, control, and durability. The arrangements of tubular rib structures and webbed areas can promote better performance, agility, and flexibility. Specifically, as a portion of the ribbed features flow over vamp region **2106**, from the periphery of sole **2514** on lateral side **2108** and extending toward medial side **2110**, wearer may have additional support, structural reinforcement, and cushioning as the foot moves from side to side. Lateral support is increased as the ribbed features resist deformation along lateral side **2108**, allowing a wearer to perform better as he/she engages in various plays, such as a lateral cutting movement. The particular orientation of ribbed features may also provide better pronation control of the foot. This is due

32

in part to the fact that knitted component **2002** included in assembled upper **2500** has a capacity for greater stretch along lateral direction **104** than along longitudinal direction **102**, as discussed earlier.

In addition, in embodiments where the knitted component includes one or more tensile elements disposed through the tubular rib structures, for example, tensile elements **2018** of knitted component **2002**, the tensile elements further provide support and resistance to stretching following along the direction of the tensile element as it is disposed through the orientation of the tubular rib structure. With this arrangement, portions of knitted component **2002** that include tensile elements **2018** may be configured to provide additional lateral support along lateral side **2108**, allowing a wearer to perform better as he/she engages in various plays, such as a lateral cutting movement. Additionally, in some embodiments, the selective inclusion or absence of tensile elements **2018** in specific tubular rib structures of knitted component **2002** may allow for some degree of stretch or deformation in desired portions of the finished article of footwear.

Heel region **2104** is supported in a similar fashion, where the ribbed features are oriented parallel to the periphery of sole **2514**. As a result there is greater stability and control for a wearer during movements of the heel, because the capacity for stretch in longitudinal direction **102** in that region is limited relative to stretch in lateral direction **104**. Wearer may also be provided with a higher degree of agility. For example, the ribbed features disposed in area of assembled upper **2500** associated with the bending of the foot in the arch and ball areas are oriented in such a way as to provide greater flexibility, so that wearer can experience better responsiveness and comfort during bending movements. Overall the structural strengthening available with assembled upper **2500** may help provide both increased support and control, as well as greater stability during flexing.

It should be understood that the embodiments in FIGS. **25-27** are for illustrative purposes only and depict only one embodiment of an upper including a knitted component. In other embodiments, the shape, length, thickness, width, arrangement, orientation, and density of ribbed features of assembled upper **2500** may vary.

Other articles can include knitted component **100** as well. For example, knitted component **100** can be included in a strap or other part of an article of apparel. In other embodiments, the knitted component(s) **100** can be further included in a strap for a bag or other container. In some embodiments, container article can include one or more features that are similar to a duffel bag. In other embodiments, container article can include features similar to a backpack or other container. Ribbed features can resiliently deform to allow a strap to lengthen under a load from container body. Ribbed features can attenuate cyclical loading in some embodiments. Also, ribbed features can deform under compression, for example, to allow strap to conform to the user's body and/or to provide cushioning. Additional embodiments may include incorporation of knitted component **100** into an article of apparel. It will be appreciated that the article of apparel can be of any suitable type, including a sports bra, a shirt, a headband, a sock, or other articles. Use of articles of apparel incorporating the knitted component **100** may allow wearer to experience improvement in balance, comfort, grip, support, and other features.

It will further be appreciated that knitted components of the types discussed herein can be incorporated into other articles as well. For example, knitted component **100** can be

33

included in a hat, cap, or helmet in some embodiments. In some embodiments, knitted component 100 can be a liner for the hat, cap, or helmet. Thus, the resiliency of knitted component 100 can allow the hat, cap, or helmet that helps conform article to the wearer's head. Knitted component 100 can also provide cushioning for the wearer's head.

In summary, the knitted component of the present disclosure can be resilient and can deform under various types of loads. This resilience can provide cushioning, for example, to make the article more comfortable to wear. This resilience can also allow the article to stretch and recover back to an original width. Accordingly, in some embodiments, knitted component can allow the article to conform to the wearer's body and/or to attenuate loads. Furthermore, the knitted component can be efficiently manufactured and assembled.

While various embodiments of the present disclosure have been described, the description is intended to be exemplary, rather than limiting, and it will be apparent to those of ordinary skill in the art that many more embodiments and implementations are possible that are within the scope of the present disclosure. Accordingly, the present disclosure is not to be restricted except in light of the attached claims and their equivalents. Also, various modifications and changes may be made within the scope of the attached claims.

I claim:

1. An article comprising:

a first tubular rib structure and a second tubular rib structure; and

a webbed area having a front surface located between the first tubular rib structure and the second tubular rib structure, the front surface of the webbed area having a first portion with a first width and a second portion with a second width, the first width being larger than the second width,

wherein each of the first portion and the second portion of the front surface is movable between a neutral position and an extended position and biased towards the neutral position,

wherein in the neutral position, the first portion and the second portion are at least partially hidden from visual observation from a first viewing perspective, and

wherein in the extended position, the first portion and the second portion of the front surface are at least partially revealed for visual observation from the first viewing perspective.

2. The article of claim 1, wherein the webbed area is at least partially formed from a first yarn, wherein the first tubular rib structure is at least partially formed from a second yarn, and wherein the first yarn and the second yarn differ in at least one characteristic.

3. The article of claim 1, wherein the first width of the webbed area includes a first number of courses, wherein the second width of the webbed area includes a second number of courses, and wherein the first number of courses is greater than the second number of courses.

4. The article of claim 1, wherein the first width stretches a first amount in response to a force applied to the article, wherein the second width stretches a second amount in response to the force applied to the article, and wherein the first amount is greater than the second amount.

5. The article of claim 1, wherein at least one of the webbed area and the first tubular rib structure is configured to stretch to move the webbed area from the neutral position to the extended position in response to a force applied to the article.

34

6. The article of claim 5, wherein the first portion and the second portion of the webbed area include a common yarn.

7. The article of claim 5, wherein the first portion and the second portion of the webbed area include a common course.

8. An article comprising:

a plurality of webbed areas including at least a first webbed area and a second webbed area,

wherein the webbed areas are configured to move between a neutral position and an extended position in response to a force applied to the article, and wherein the webbed areas are biased towards the neutral position; and

a first curved portion with a first edge and a second edge, the first edge being adjacent to the first webbed area and the second edge being adjacent to the second webbed area,

wherein the first curved portion is configured to move from an unstretched position to a stretched position in response to the force applied to the article, wherein the first curved portion is biased towards the unstretched position, wherein the unstretched position corresponds with the neutral position of the webbed areas and the stretched position corresponds with the extended position of the webbed areas,

wherein in the unstretched position, a front surface of each of the first and second webbed areas is at least partially hidden from visual observation from a first viewing perspective by the first curved portion, and

wherein in the stretched position, the front surfaces of the first and second webbed areas are at least partially revealed for visual observation from the first viewing perspective due to the movement of the first curved portion.

9. The article of claim 8, wherein the first curved portion is at least partially formed from a first yarn.

10. The article of claim 8, further comprising a second curved portion, wherein the first curved portion and the second curved portion are attached together to define a tube forming a tubular rib structure.

11. The article of claim 10, wherein the second curved portion is attached to the first curved portion at the first edge and the second edge.

12. The article of claim 10, wherein the first curved portion is formed by a first number of courses, wherein the second curved portion is formed by a second number of courses, and wherein the first number of courses is greater than the second number of courses.

13. The article of claim 10, further comprising:

a first midpoint of the first curved portion; and

a second midpoint of the second curved portion,

wherein when the first curved portion is in the unstretched position, the first midpoint is located a first distance from the second midpoint,

wherein when the first curved portion is in the stretched position, the first midpoint is located a second distance from the second midpoint, and

wherein the first distance is greater than the second distance.

14. The article of claim 10, wherein the second curved portion is configured to move from an unstretched position to a stretched position in response to the force applied to the article.

15. The article of claim 8, wherein the first curved portion includes a first width and a second width, the first width being larger than the second width.

35

16. An article comprising:
a plurality of webbed areas including a plurality of
courses formed at least partially with a first yarn; and
a plurality of tubular structures located adjacent to the
webbed areas, the tubular structures including a second
plurality of courses formed at least partially with a
second yarn,
wherein the first yarn and the second yarn differ in at least
one characteristic,
wherein each of the webbed areas includes a front surface
that is movable between a neutral position and an
extended position and biased towards the neutral posi-
tion,
wherein in the neutral position, each of the webbed areas
is at least partially hidden from visual observation from
a first viewing perspective, and
wherein in the extended position, each of the webbed
areas is at least partially revealed for visual observation
from the first viewing perspective.
17. The article of claim 16, wherein the at least one
characteristic includes at least one of color, diameter, denier,
elasticity, and texture.
18. The article of claim 16, wherein the first yarn and the
second yarn differ in color.
19. The article of claim 16, wherein the article is config-
ured to stretch between the neutral position and the extended
position in response to a force applied to the article, and
wherein the article is biased toward the neutral position.
20. The article of claim 19, wherein a first webbed area of
the plurality of webbed areas is wider than a second webbed
area of the plurality of webbed areas.

* * * * *

36