


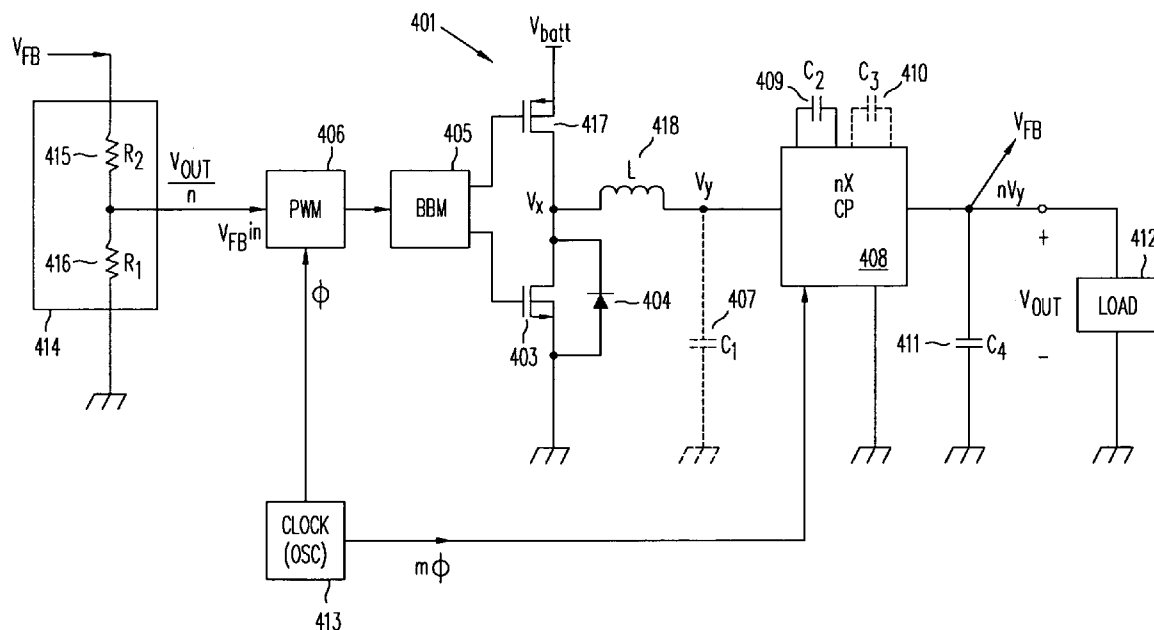

US 20080158915A1

(19) **United States**(12) **Patent Application Publication**
Williams(10) **Pub. No.: US 2008/0158915 A1**(43) **Pub. Date: Jul. 3, 2008**(54) **HIGH-EFFICIENCY DC/DC VOLTAGE
CONVERTER INCLUDING DOWN
INDUCTIVE SWITCHING PRE-REGULATOR
AND CAPACITIVE SWITCHING
POST-CONVERTER****Publication Classification**(51) **Int. Cl.**
H02M 3/335 (2006.01)(75) **Inventor:** **Richard K. Williams**, Cupertino,
CA (US)(52) **U.S. Cl.** **363/21.06****Correspondence Address:**
PATENTABILITY ASSOCIATES
P.O. BOX 9551
SAN JOSE, CA 95157(73) **Assignee:** **Advanced Analogic Technologies,**
Inc., Sunnyvale, CA (US)(21) **Appl. No.:** **11/890,818**(22) **Filed:** **Aug. 8, 2007****Related U.S. Application Data**(60) Provisional application No. 60/877,952, filed on Dec.
30, 2006, provisional application No. 60/877,720,
filed on Dec. 30, 2006.(57) **ABSTRACT**

A DC/DC converter includes a pre-regulator stage, which may include a Buck converter, and a post-converter stage, which may include a charge pump. The duty factor of the pre-regulator stage is controlled by a feedback path that extends from the output terminal of the pre-regulator stage or the post-converter stage. The pre-regulator steps the input DC voltage down by a variable amount depending on the duty factor, and the post-converter steps the voltage at the output of the pre-regulator up or down by an positive or negative integral or fractional value. The converter overcomes the problems of noise glitches, poor regulation, and instability, even near unity input-to-output voltage conversion ratios.

400

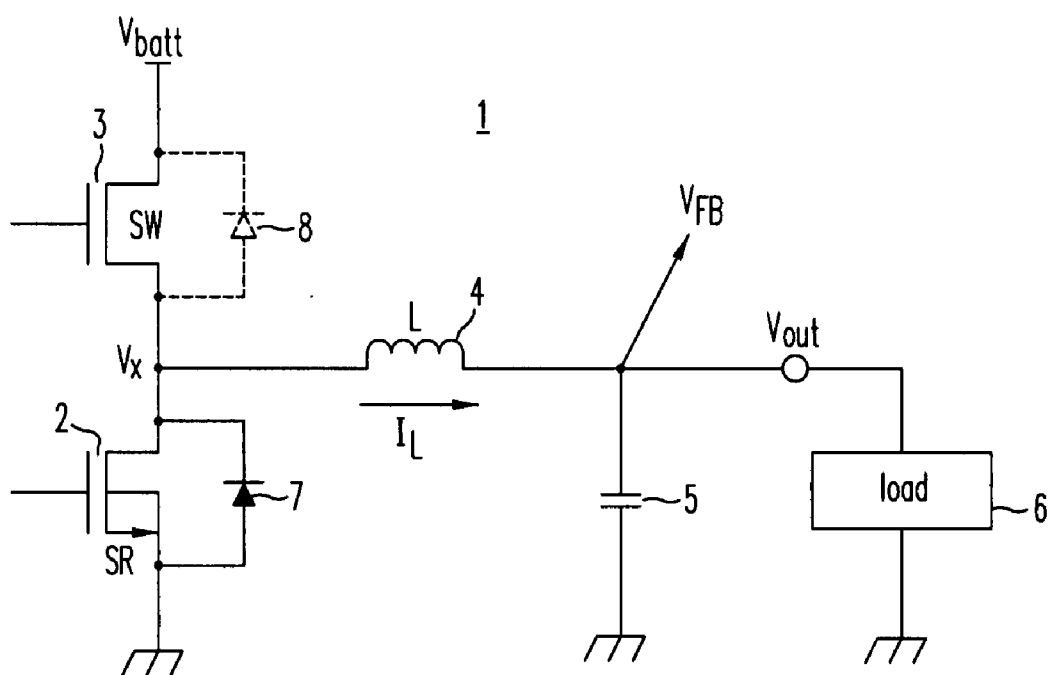


FIG. 1A
(Prior Art)

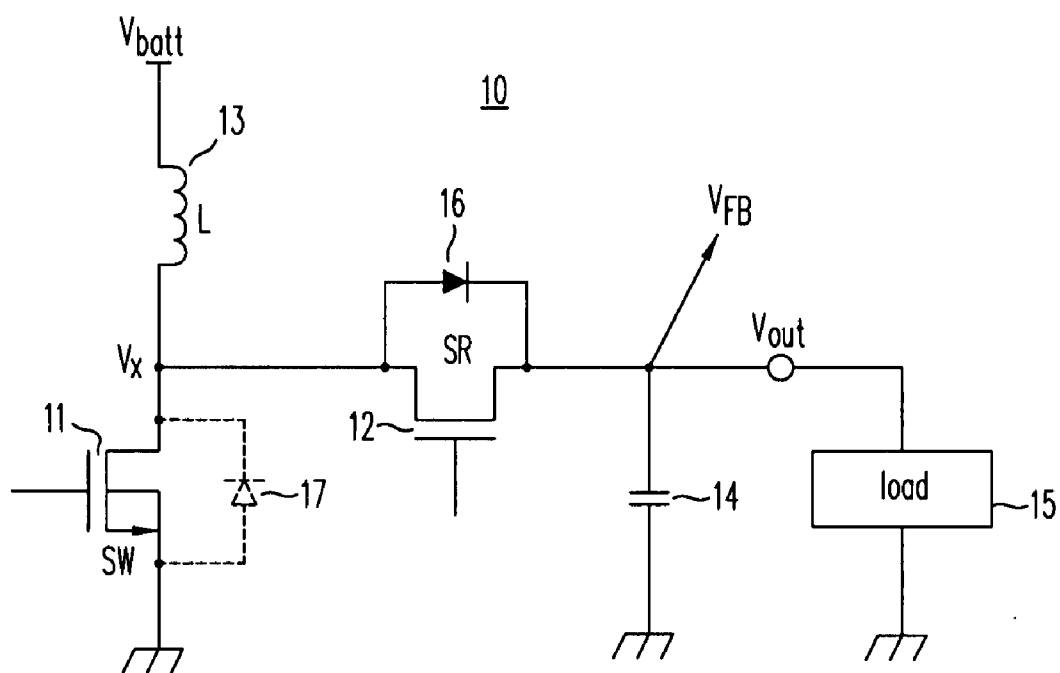


FIG. 1B
(Prior Art)

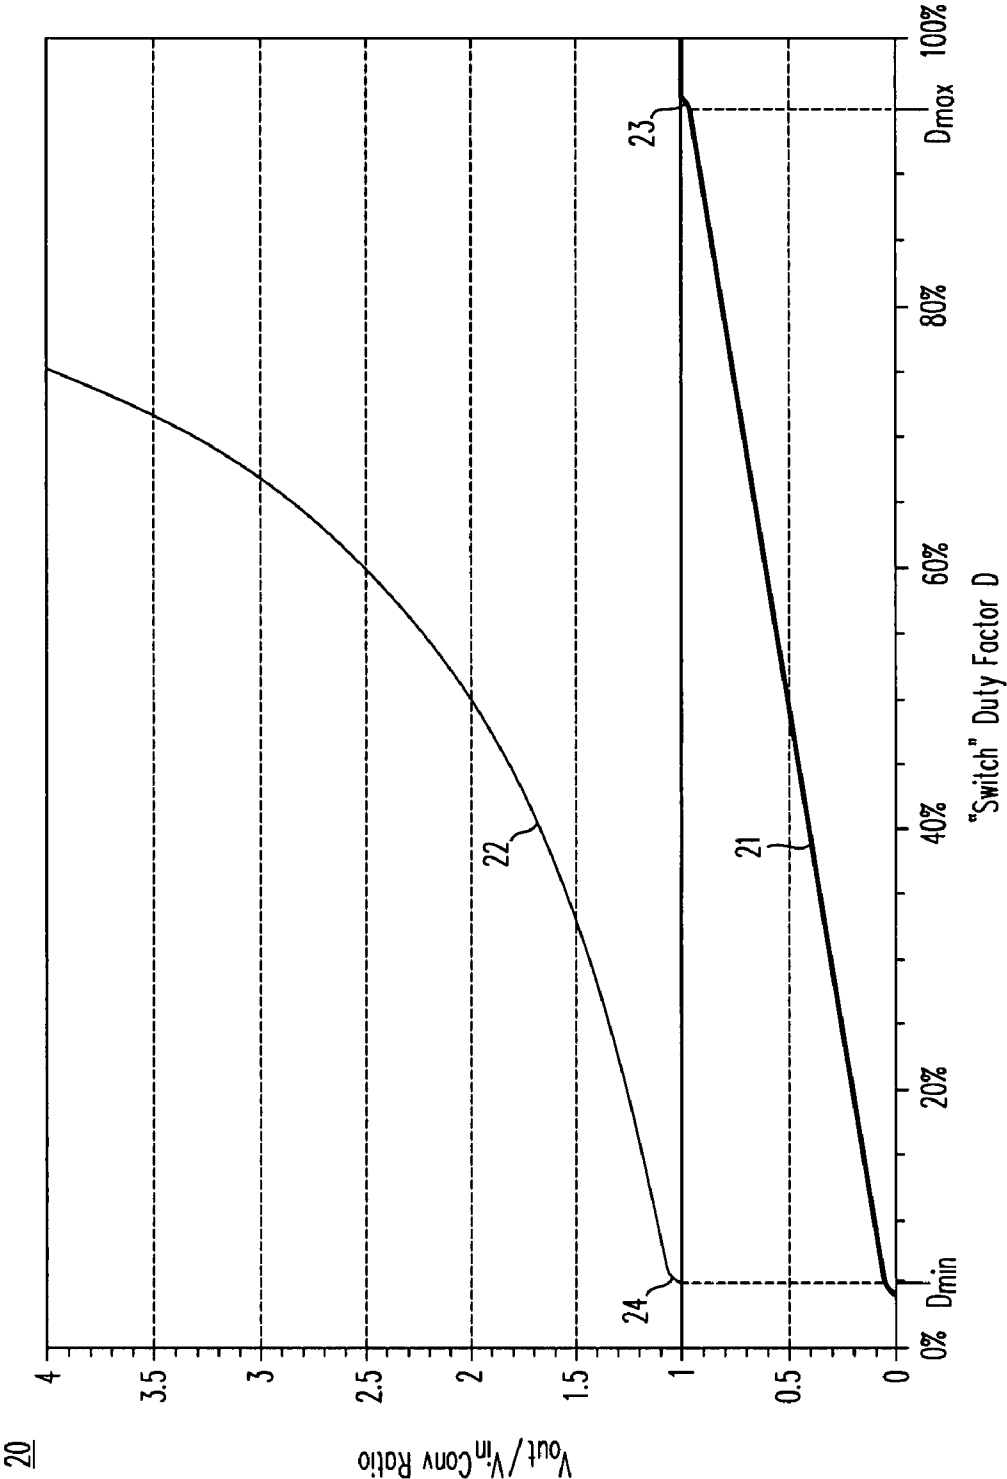


FIG. 1C

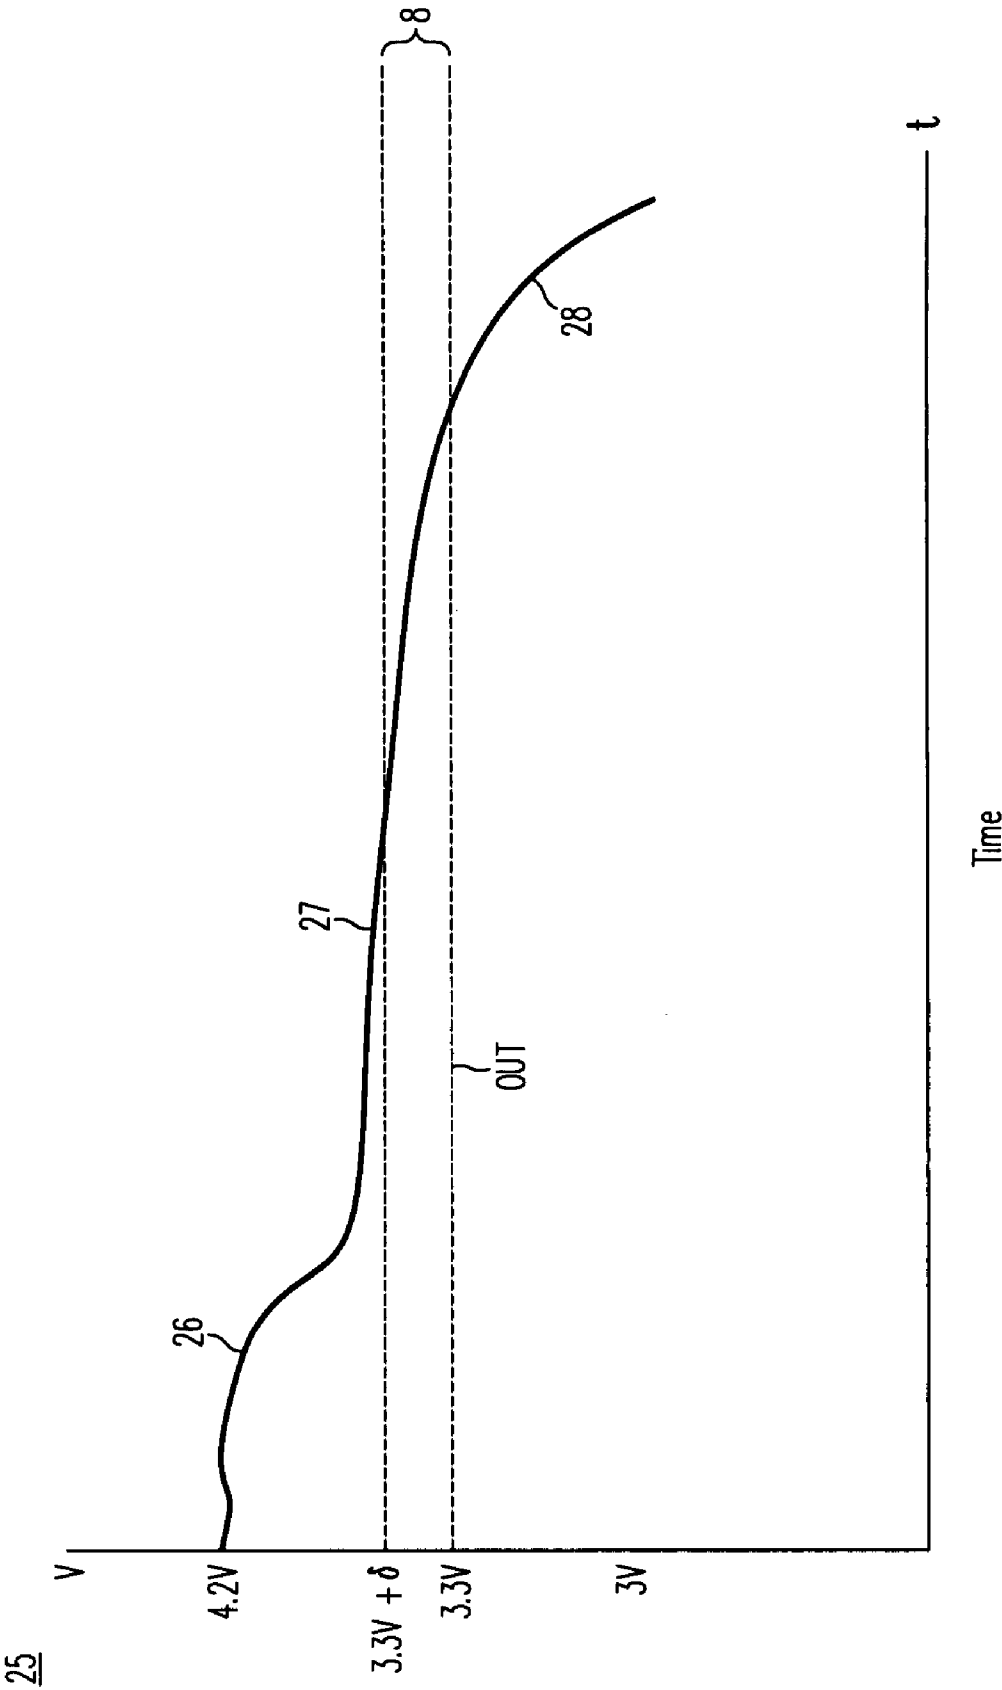


FIG. 2

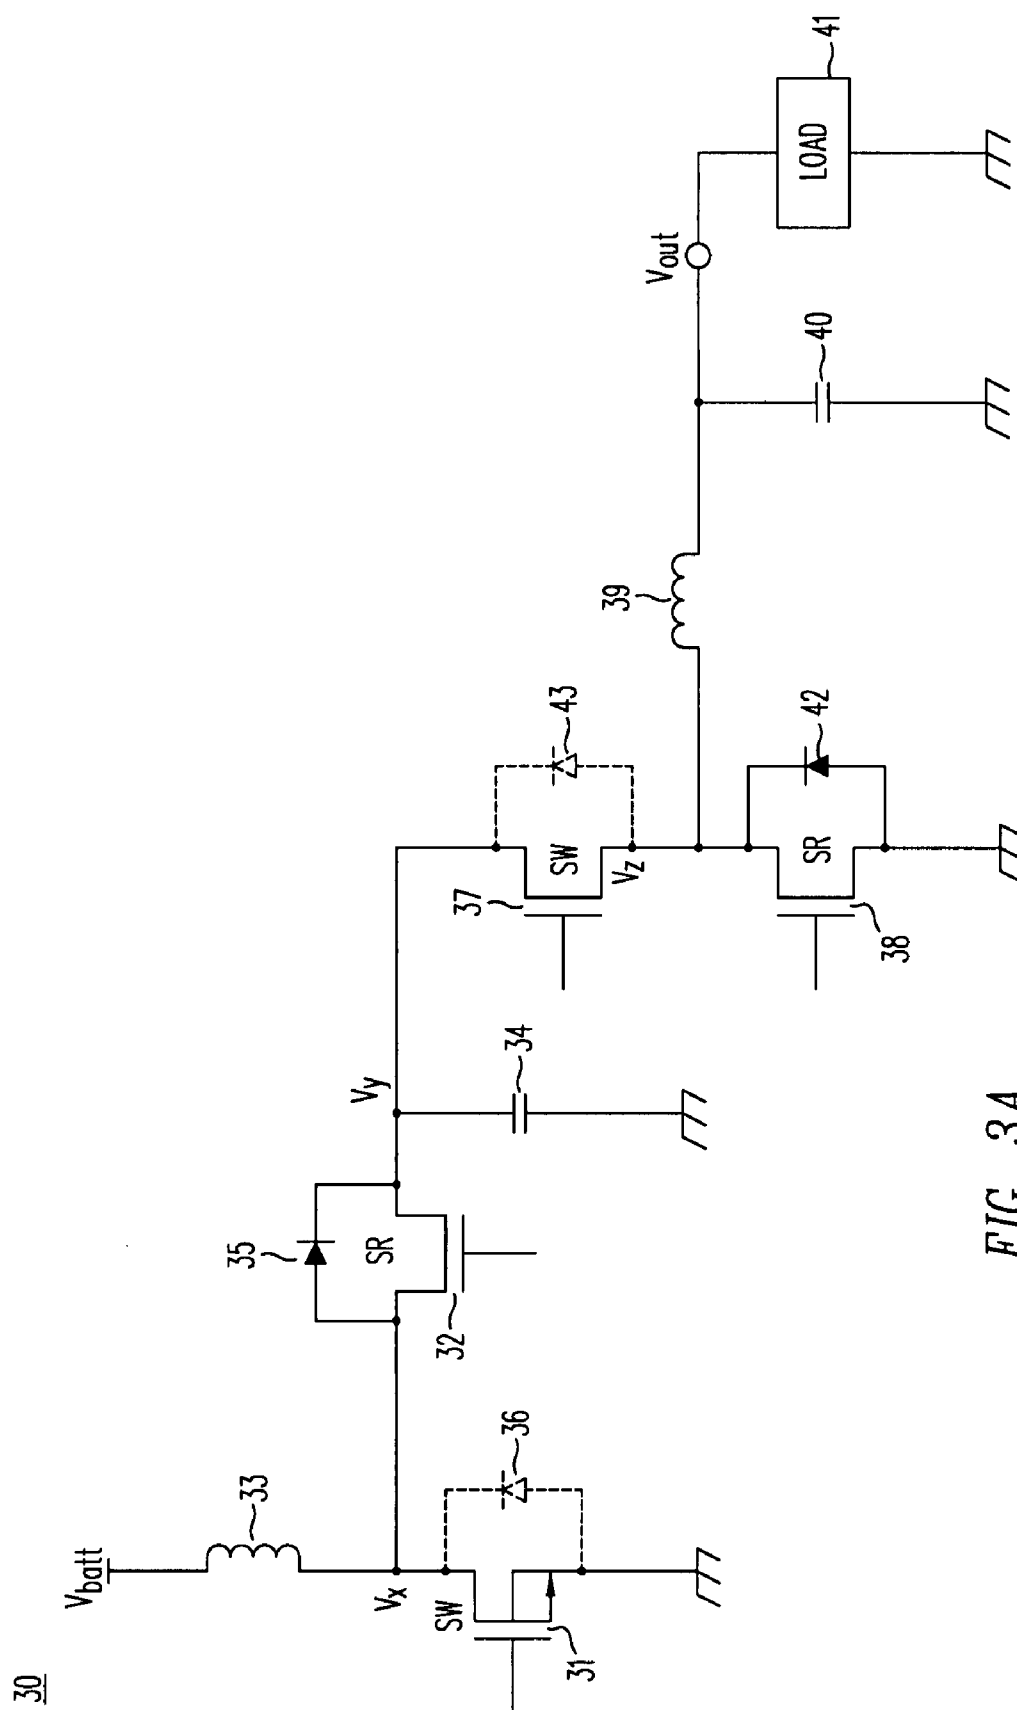


FIG. 3A
(Prior Art)

30

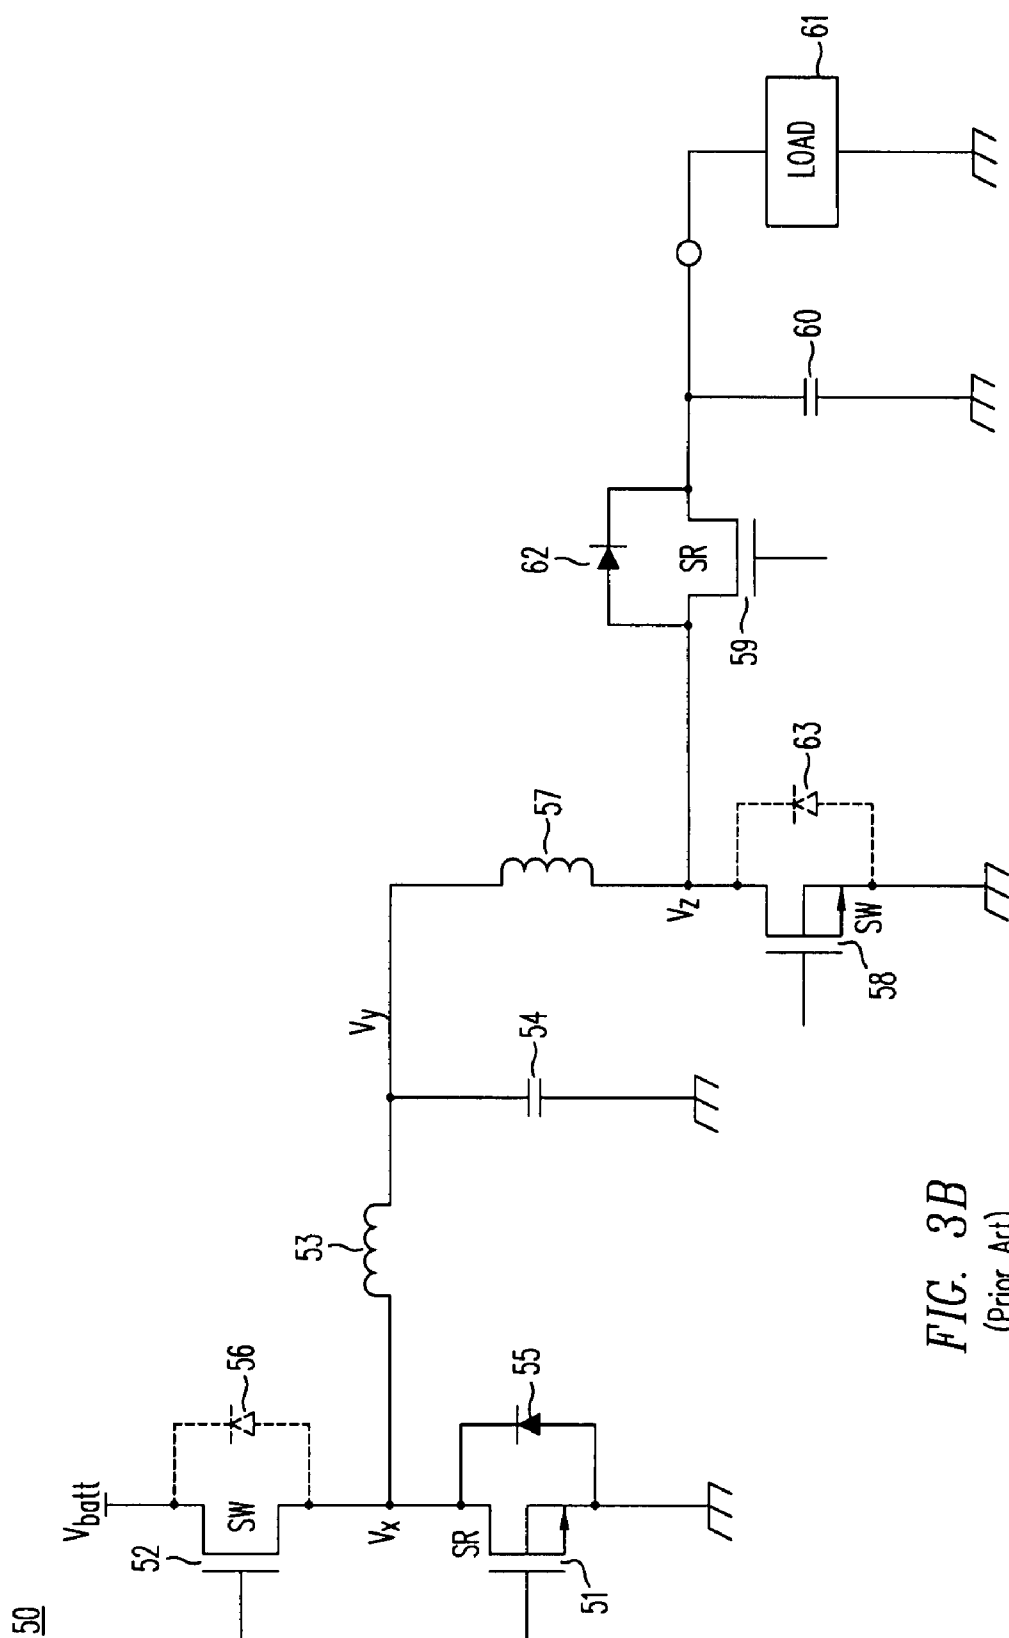


FIG. 3B
(Prior Art)

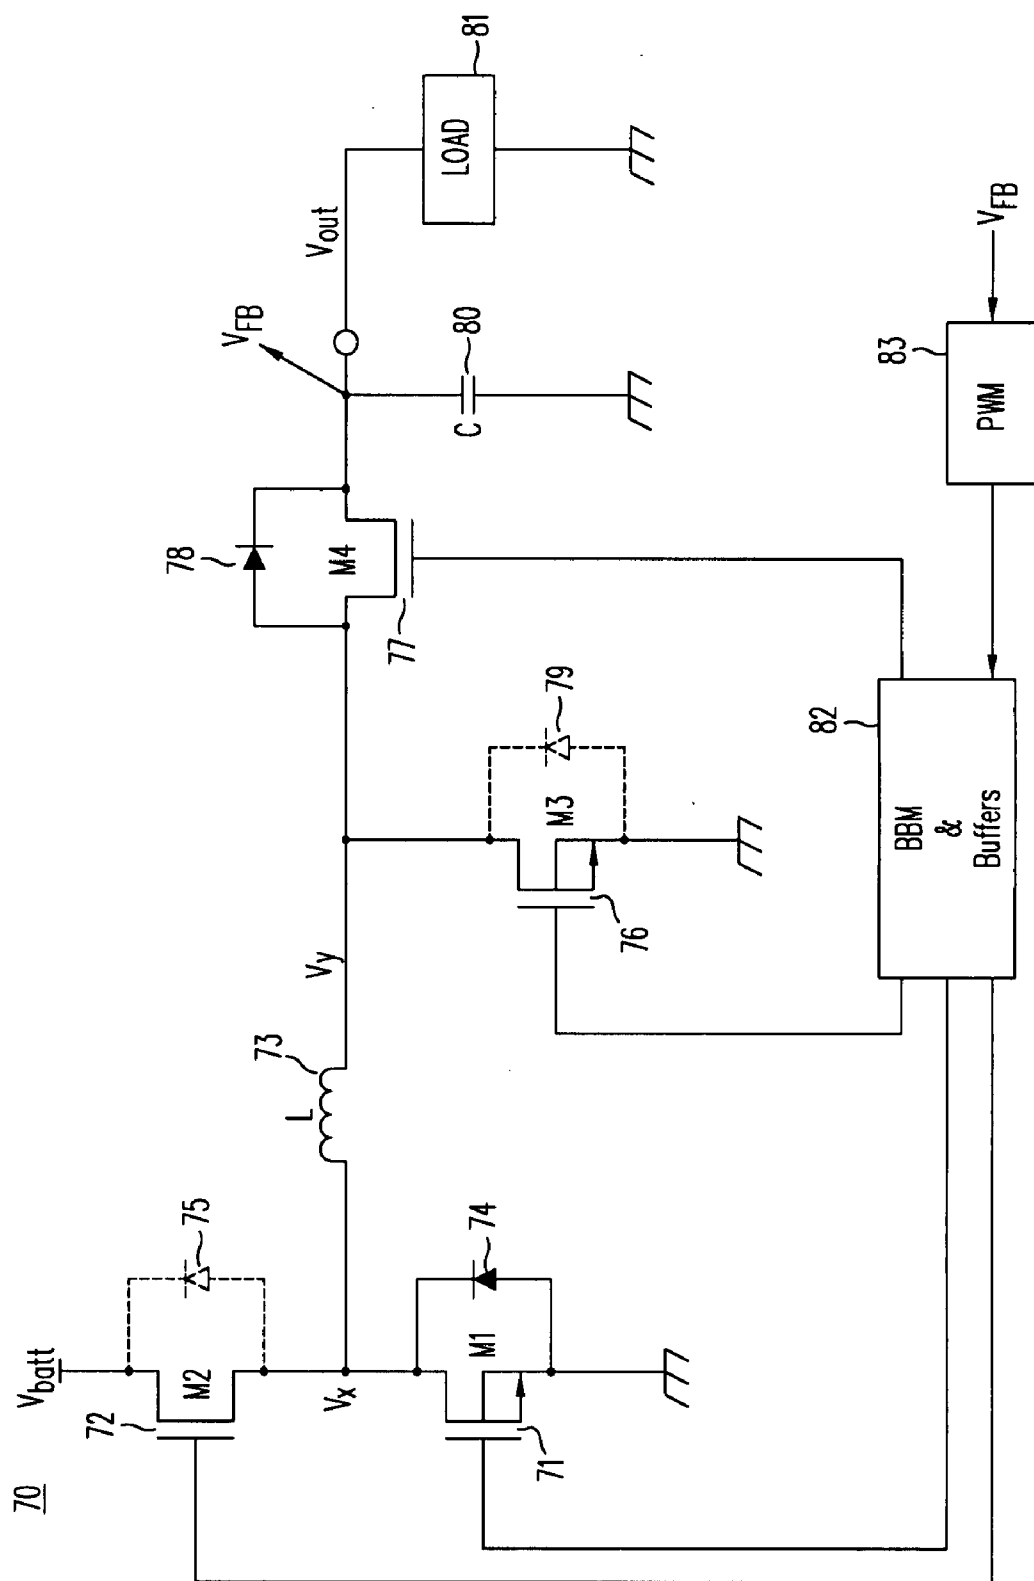


FIG. 4 (Prior Art)

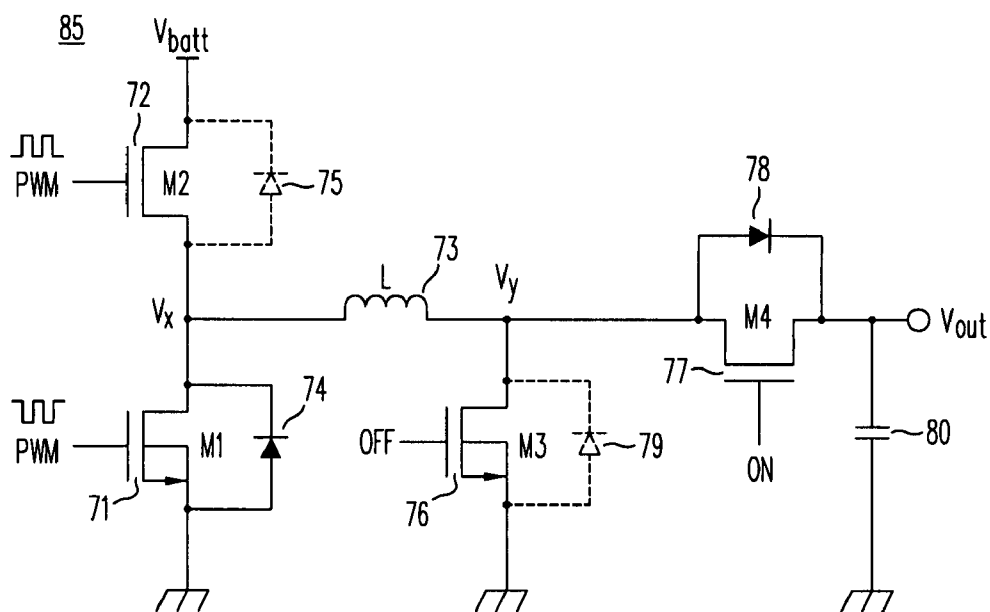


FIG. 5A
(Prior Art)

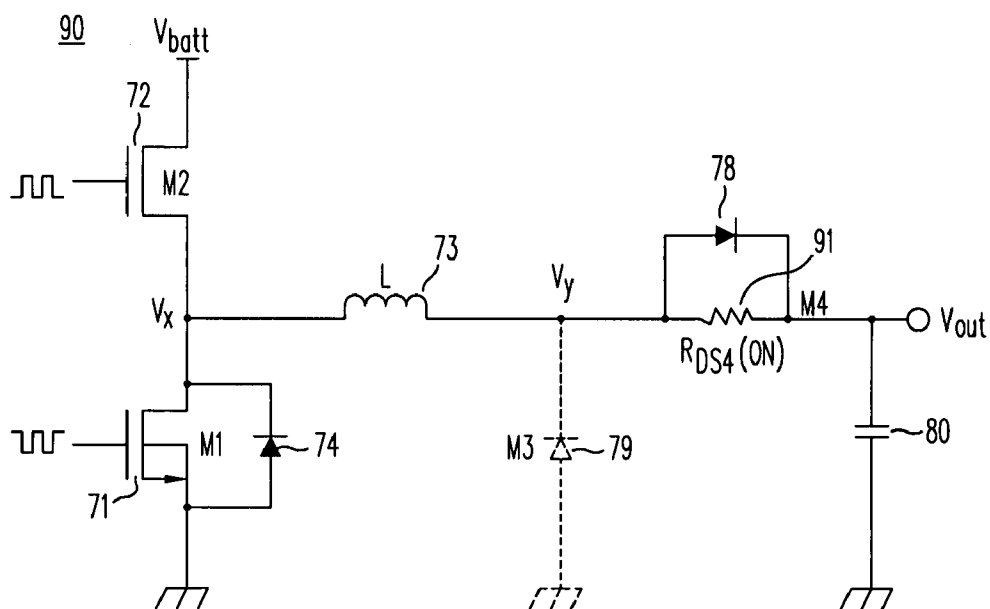


FIG. 5B
(Prior Art)

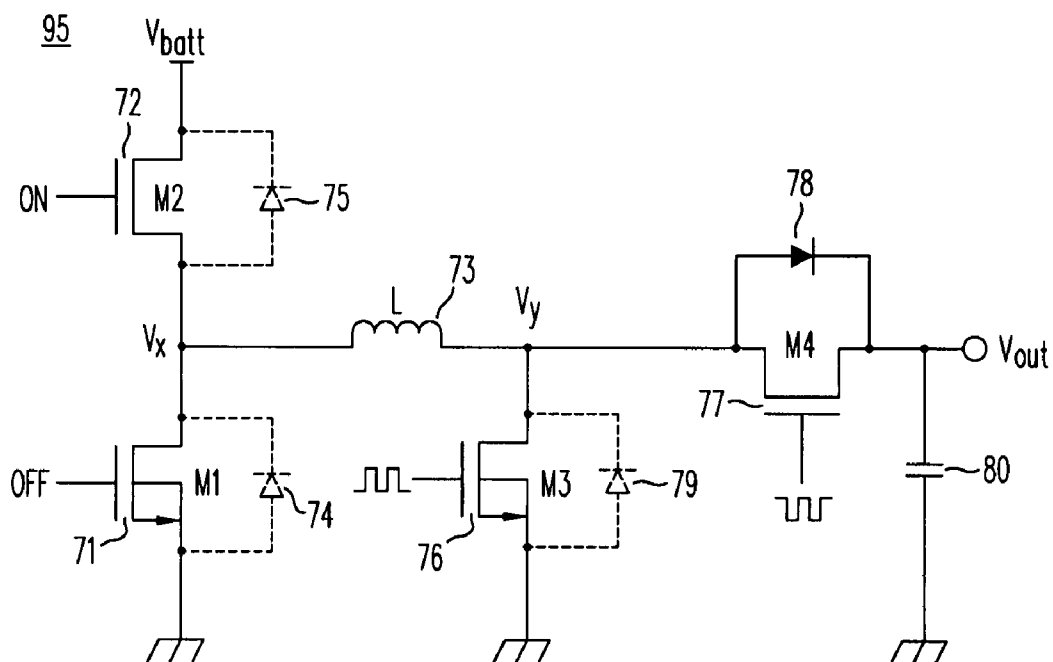


FIG. 6A
(Prior Art)

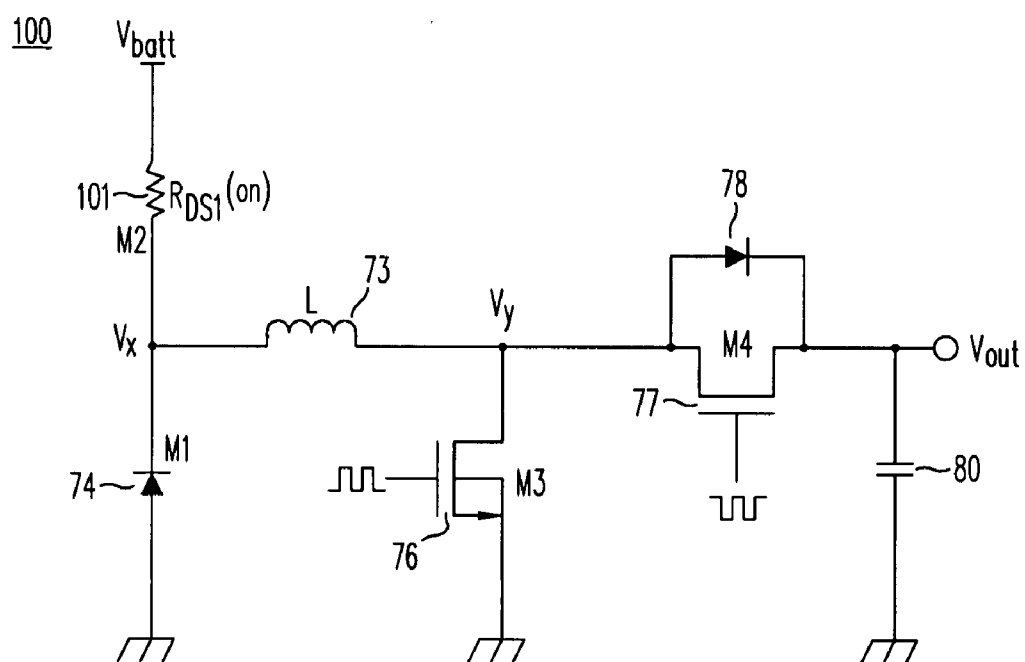


FIG. 6B
(Prior Art)

105

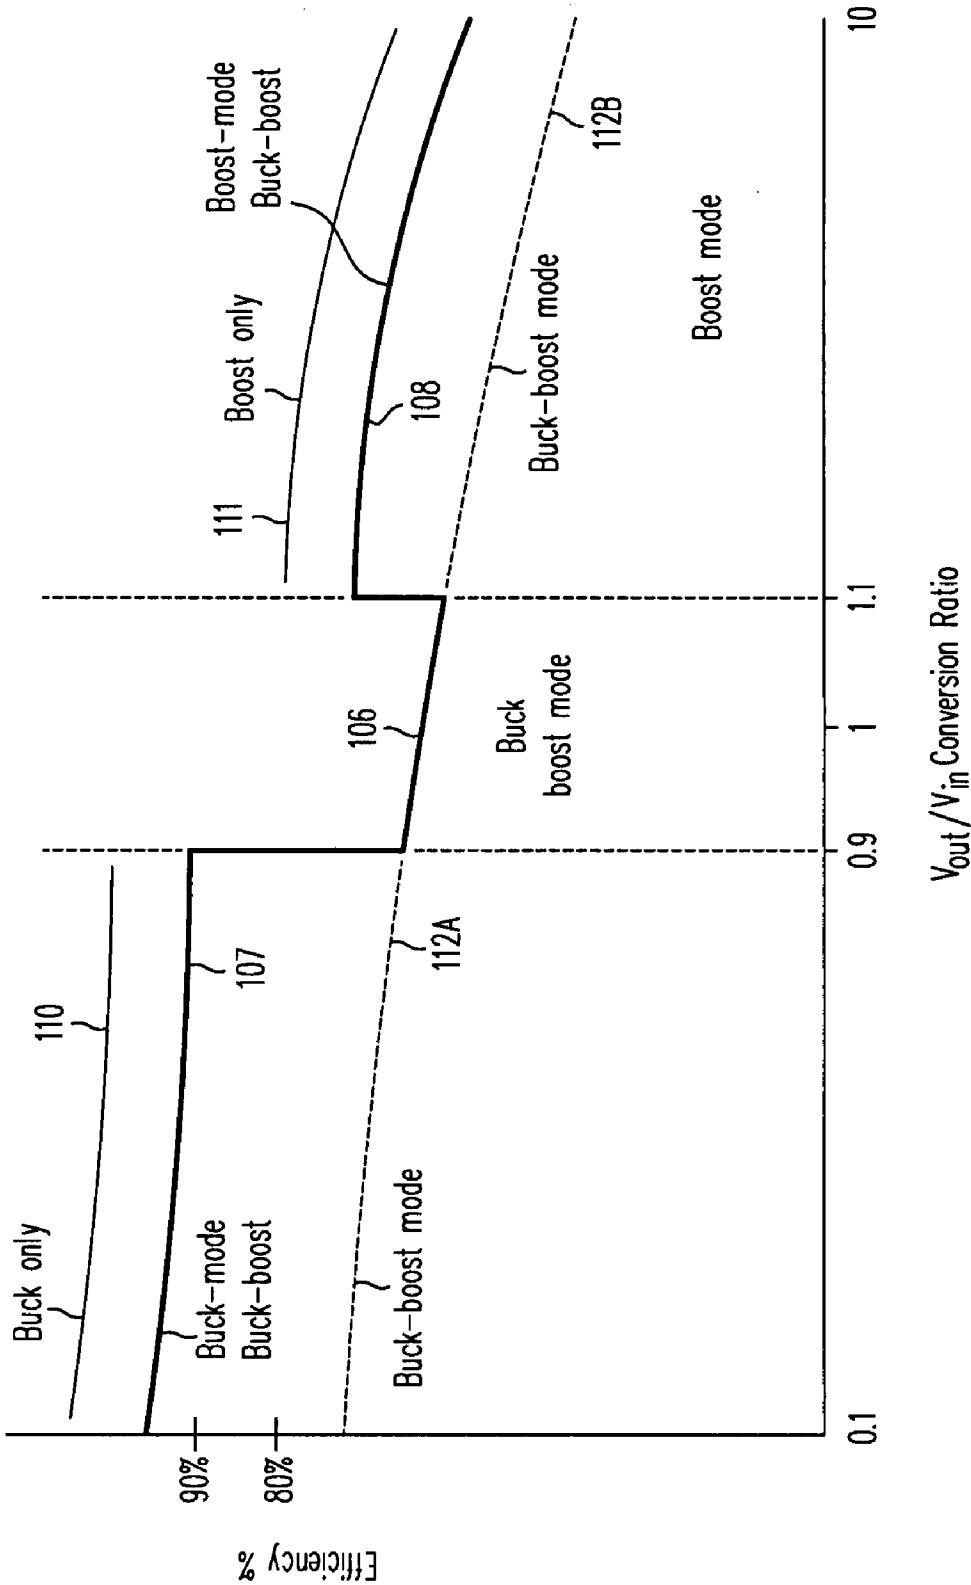
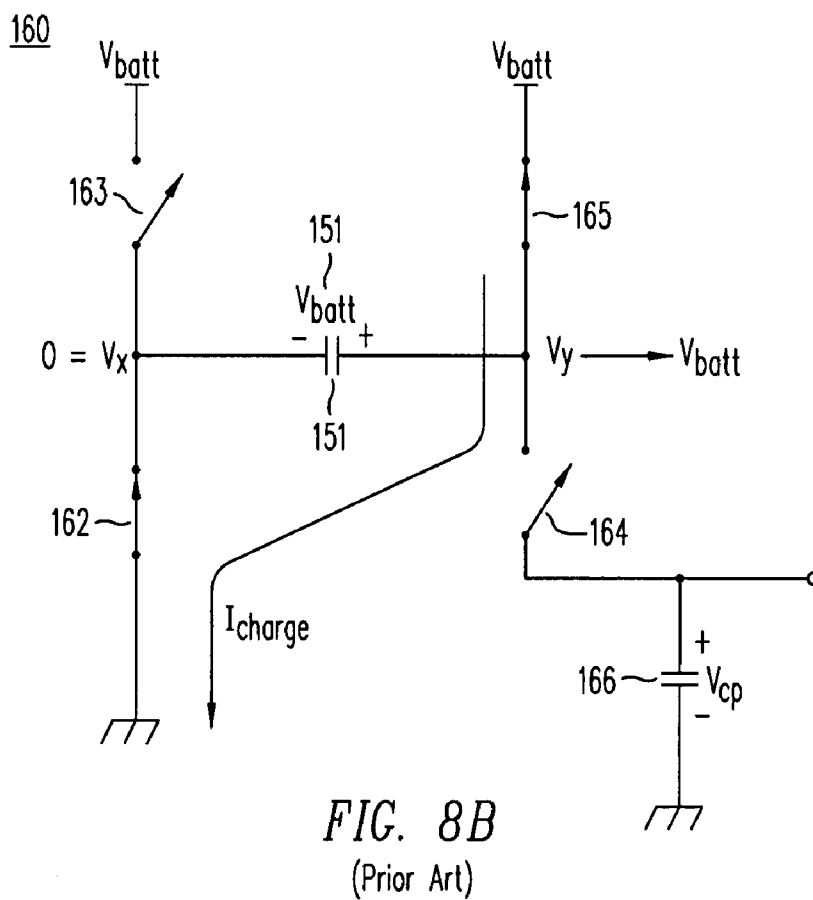
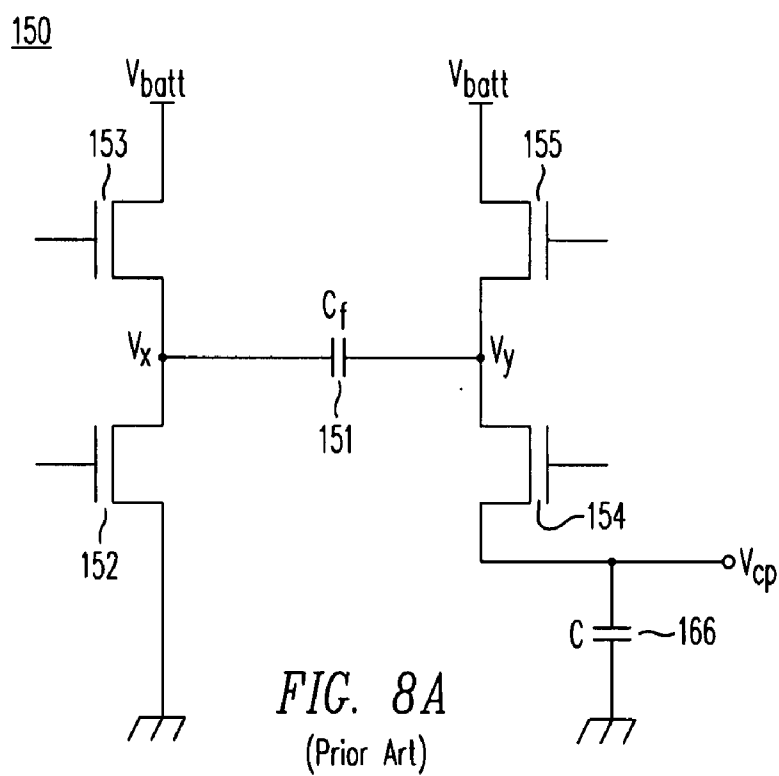
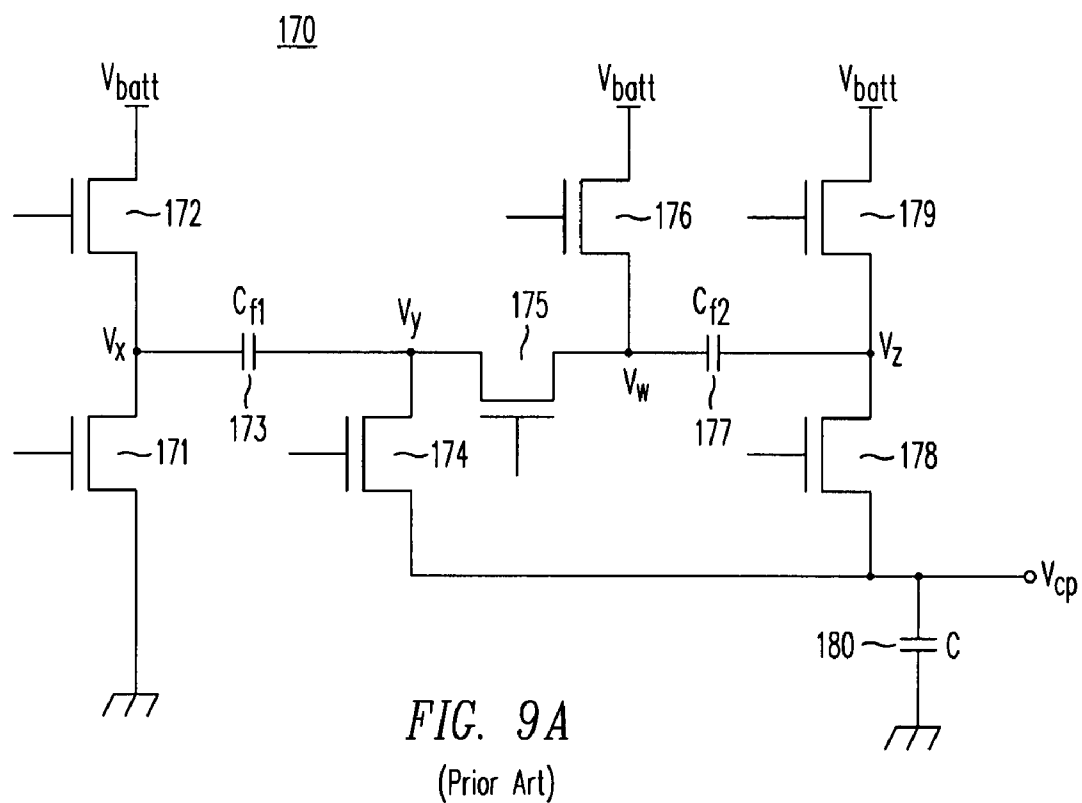
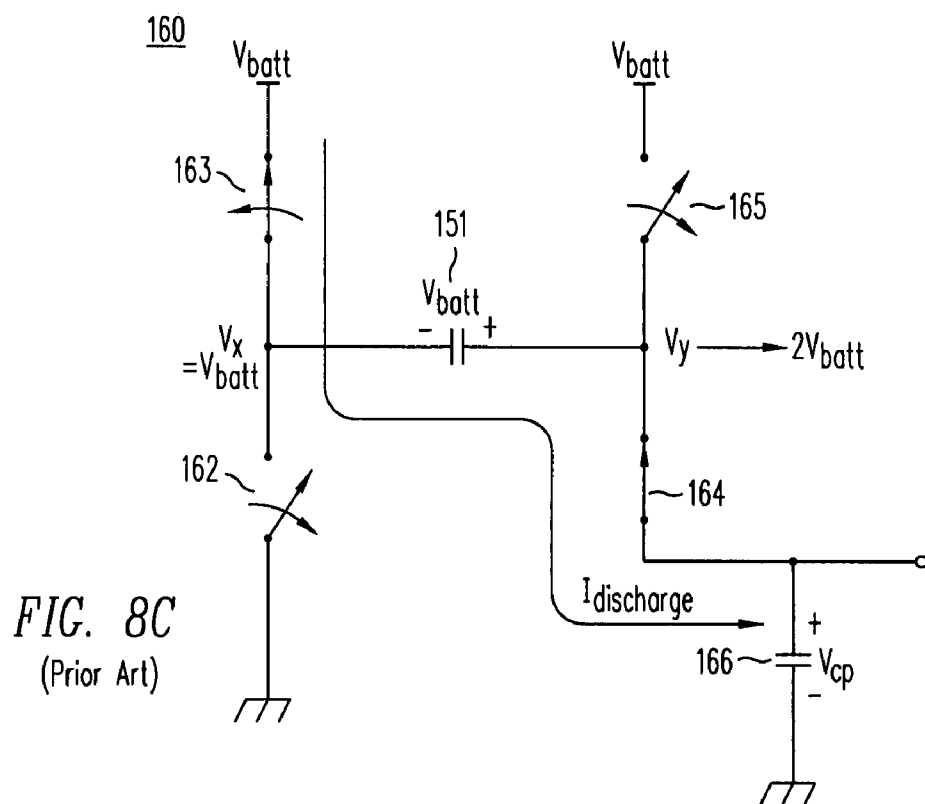


FIG. 7





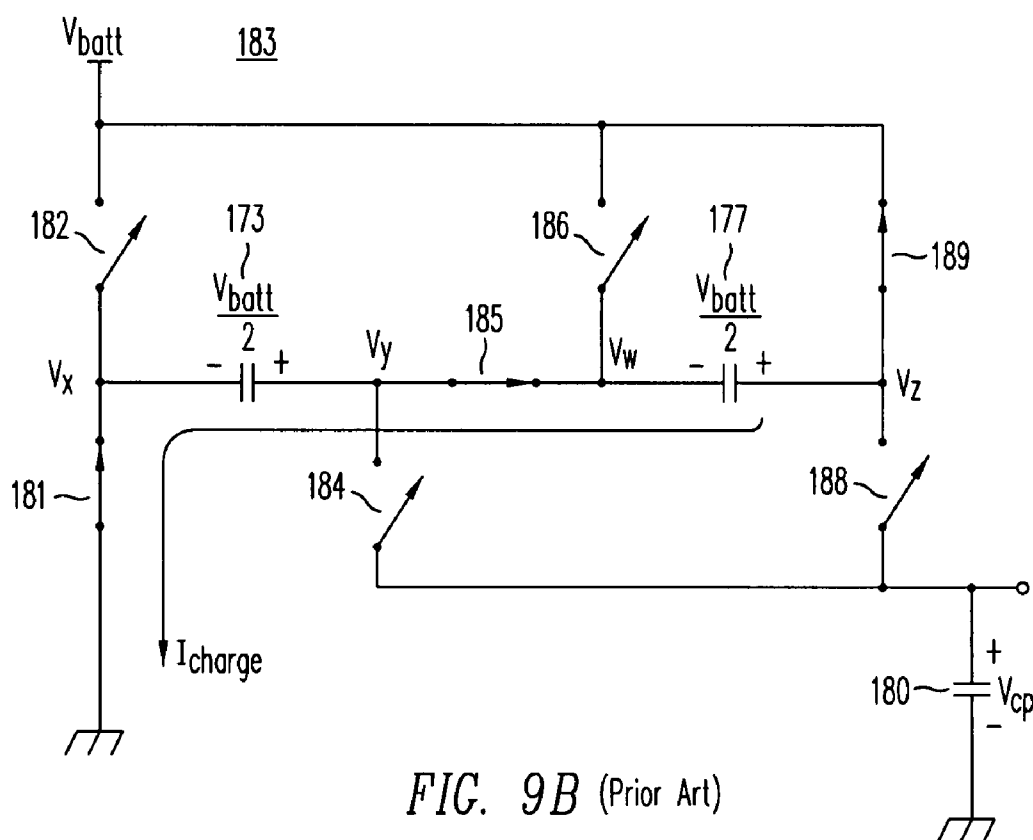


FIG. 9B (Prior Art)

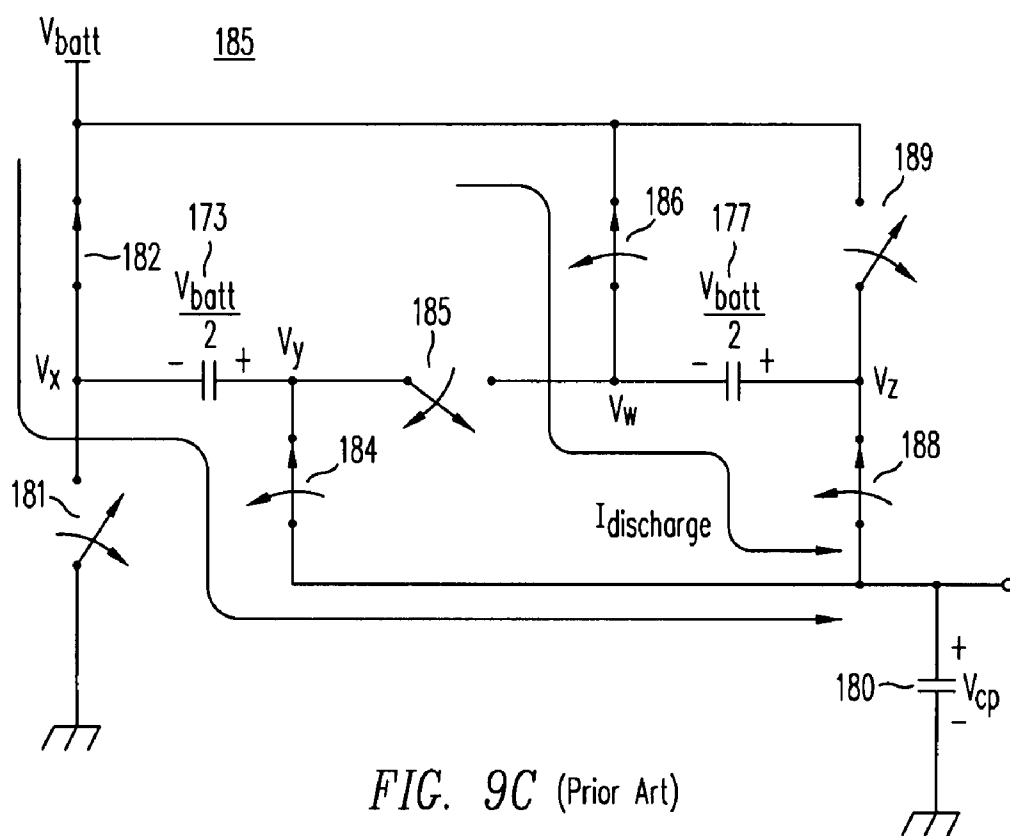


FIG. 9C (Prior Art)

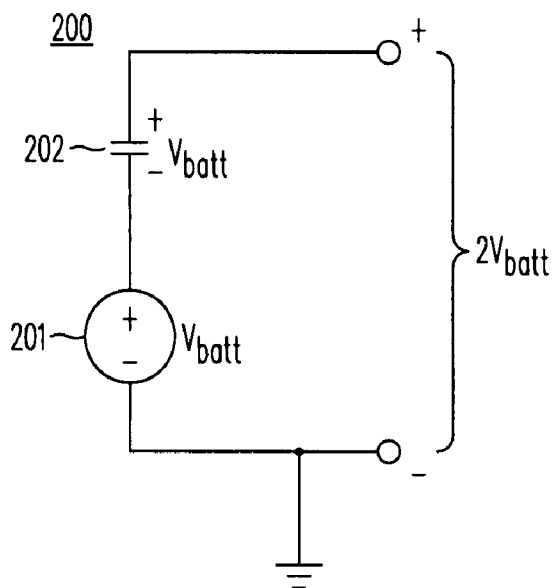


FIG. 10A

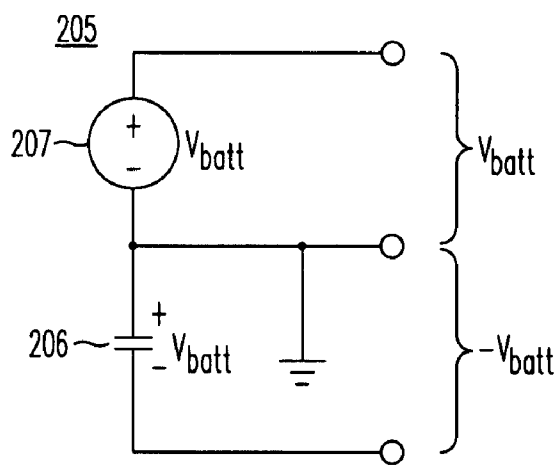


FIG. 10B

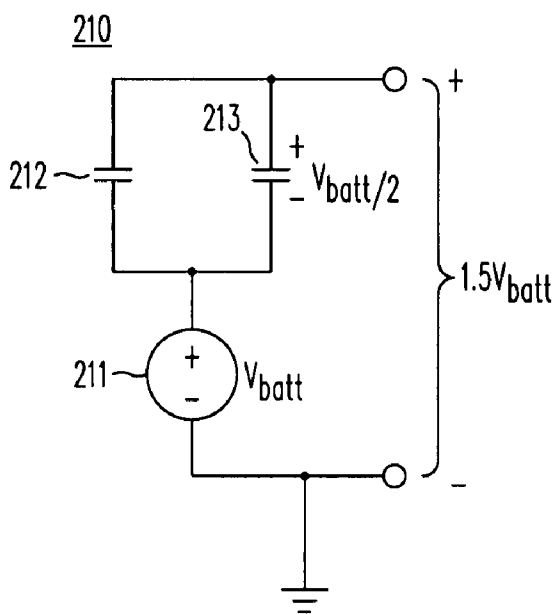


FIG. 10C

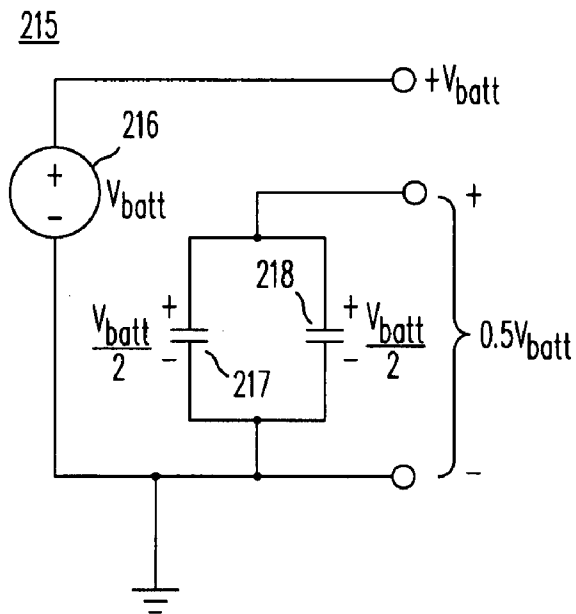


FIG. 10D

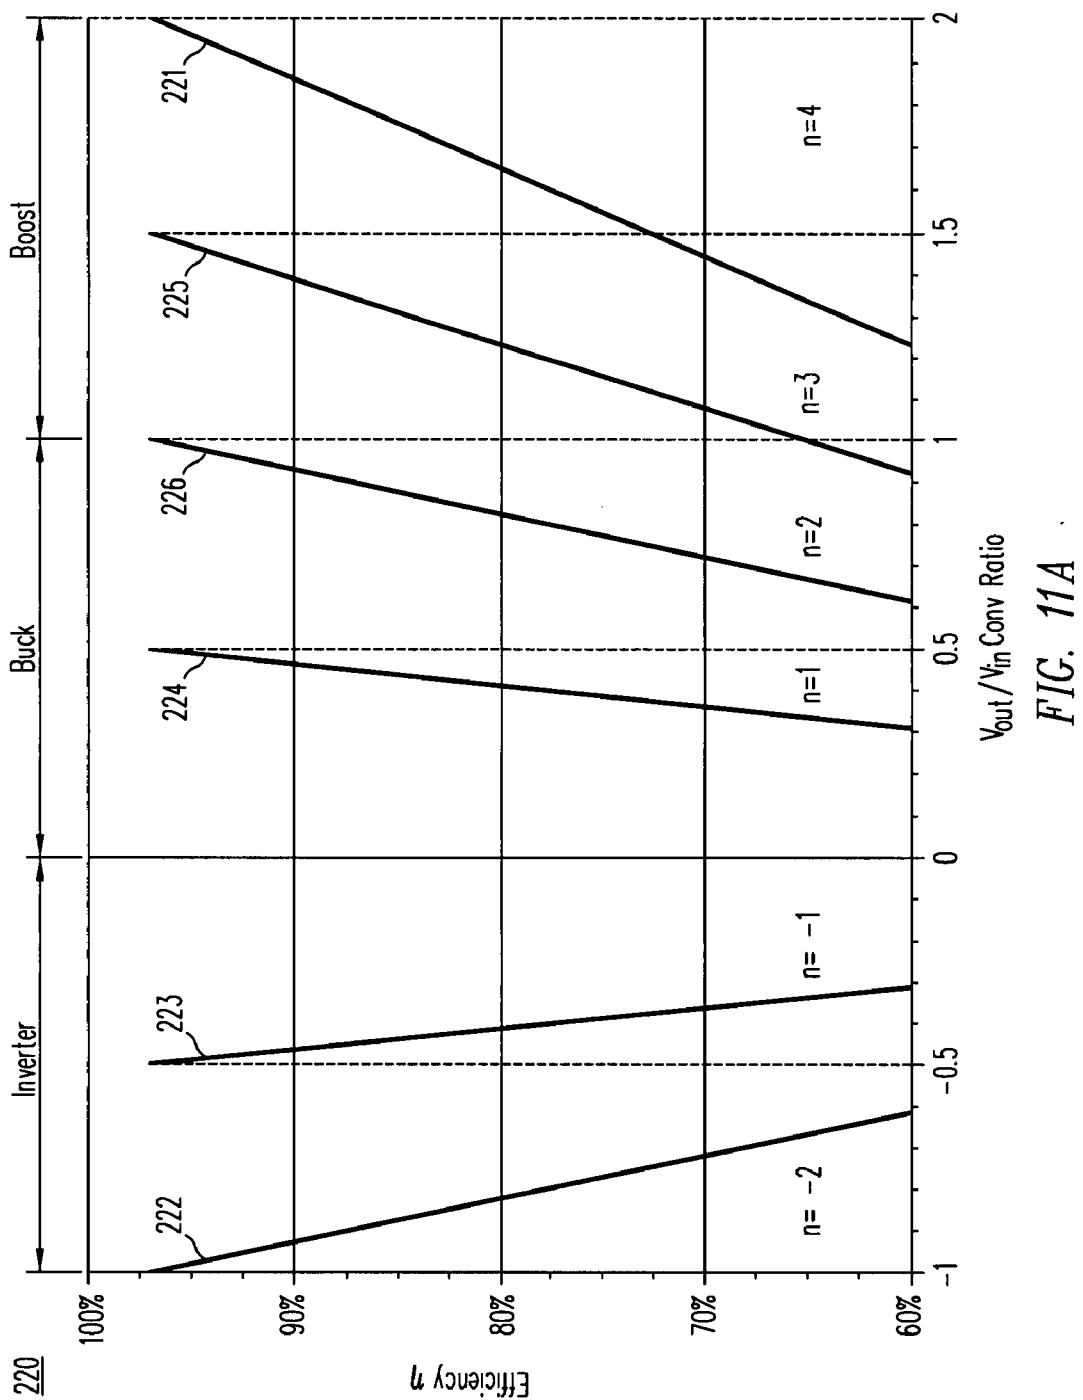


FIG. 11A

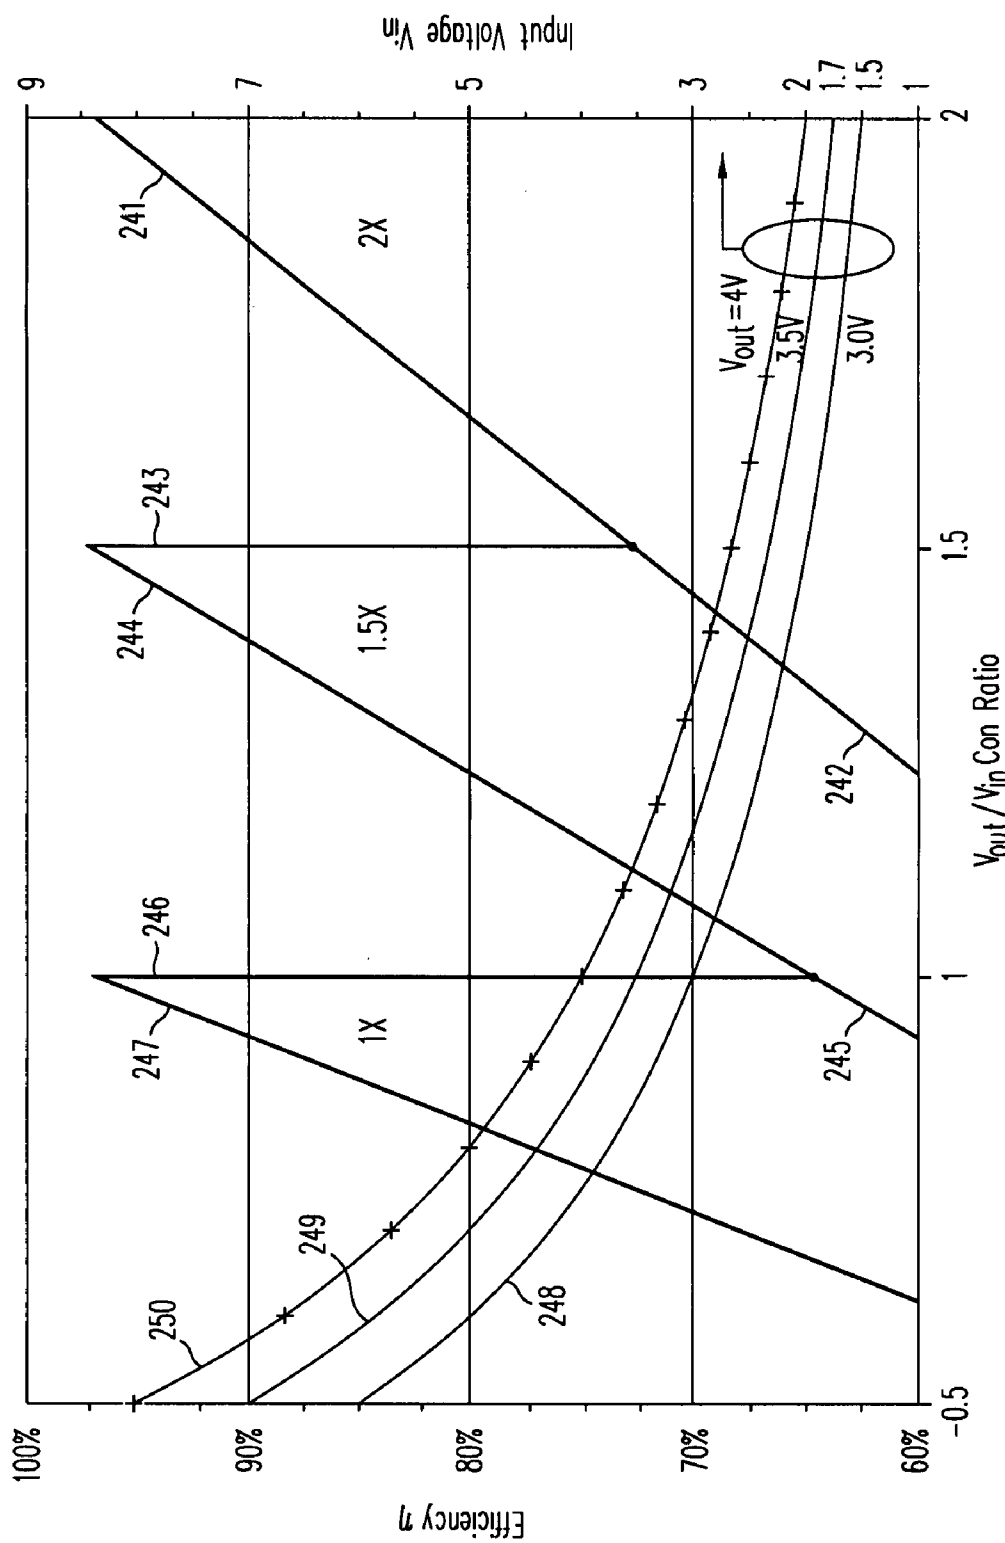
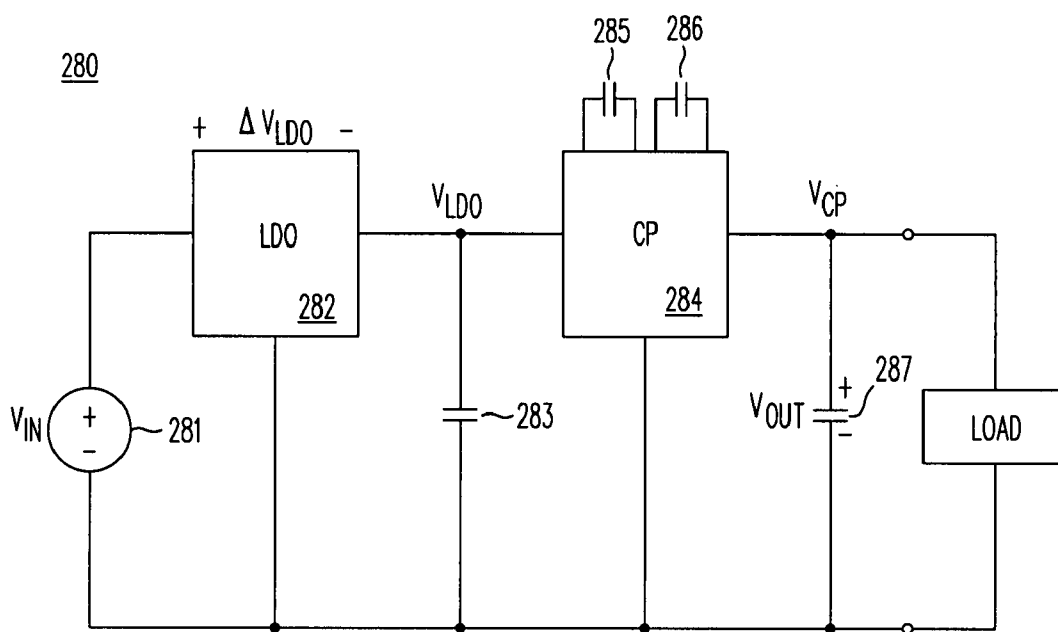
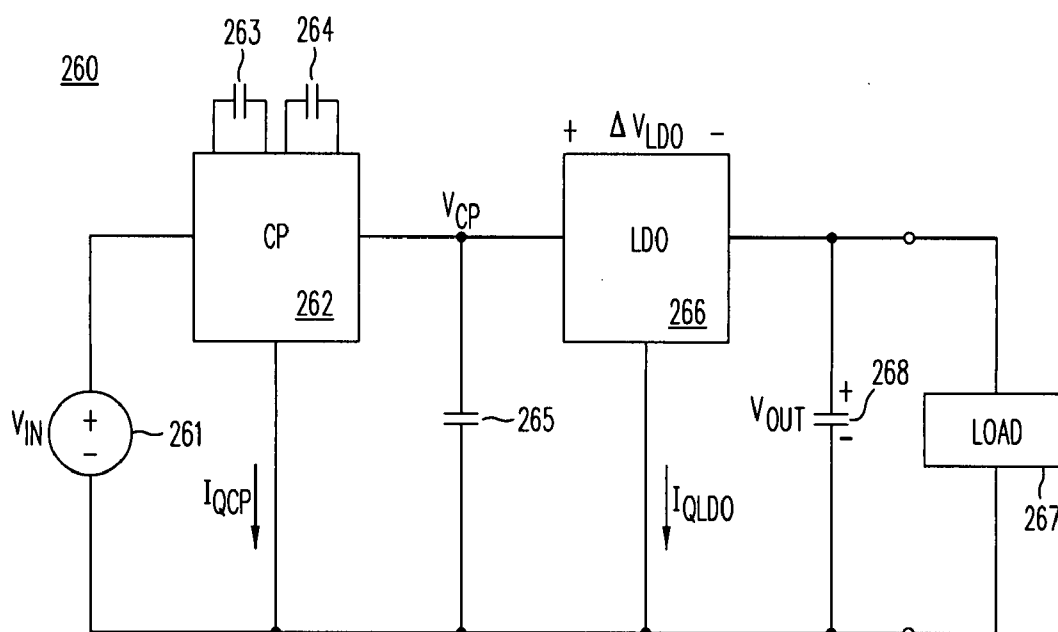


FIG. 11B



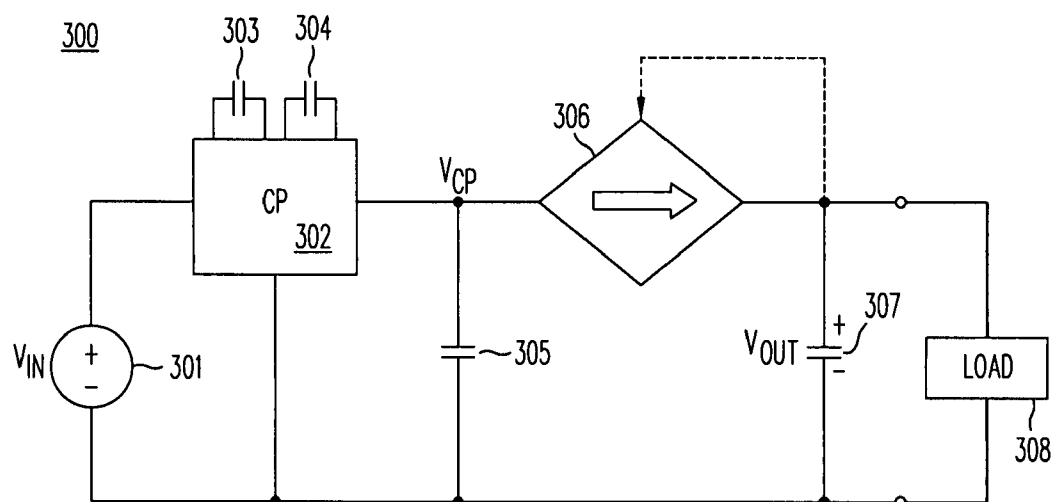


FIG. 12C (Prior Art)

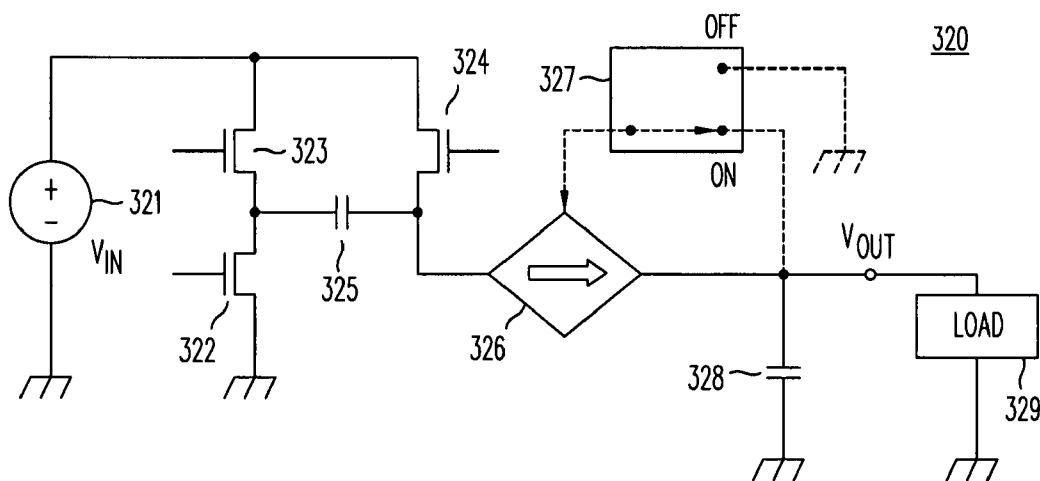


FIG. 12D
(Prior Art)

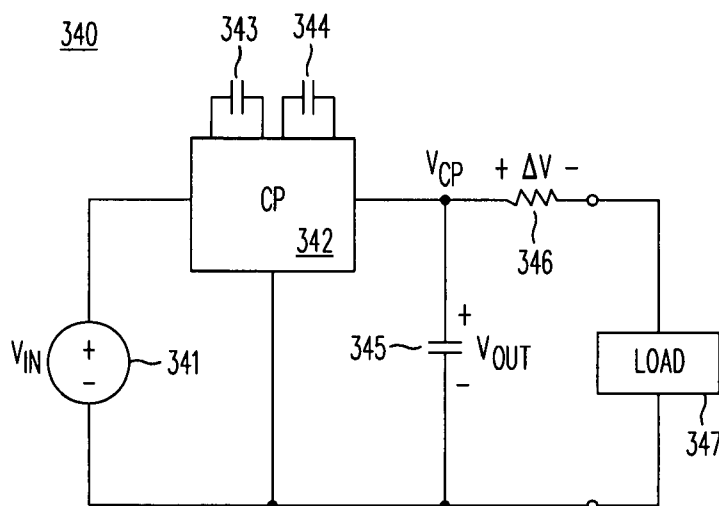
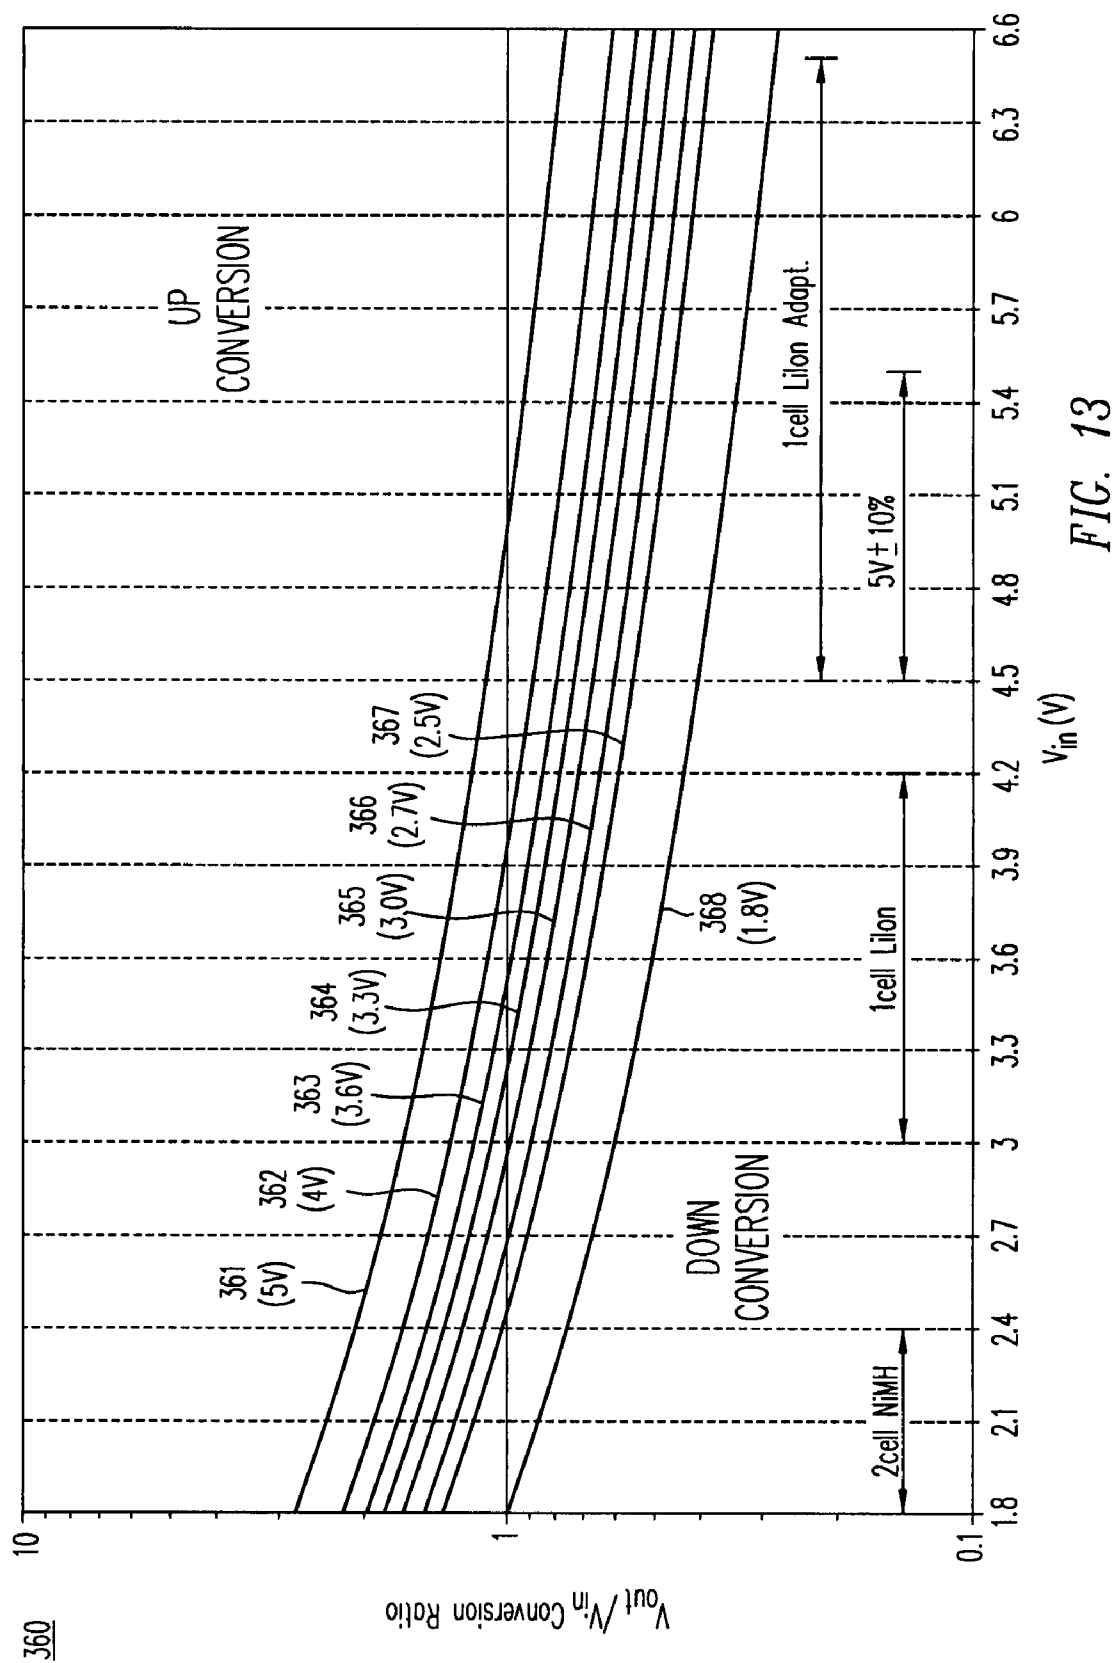


FIG. 12E
(Prior Art)



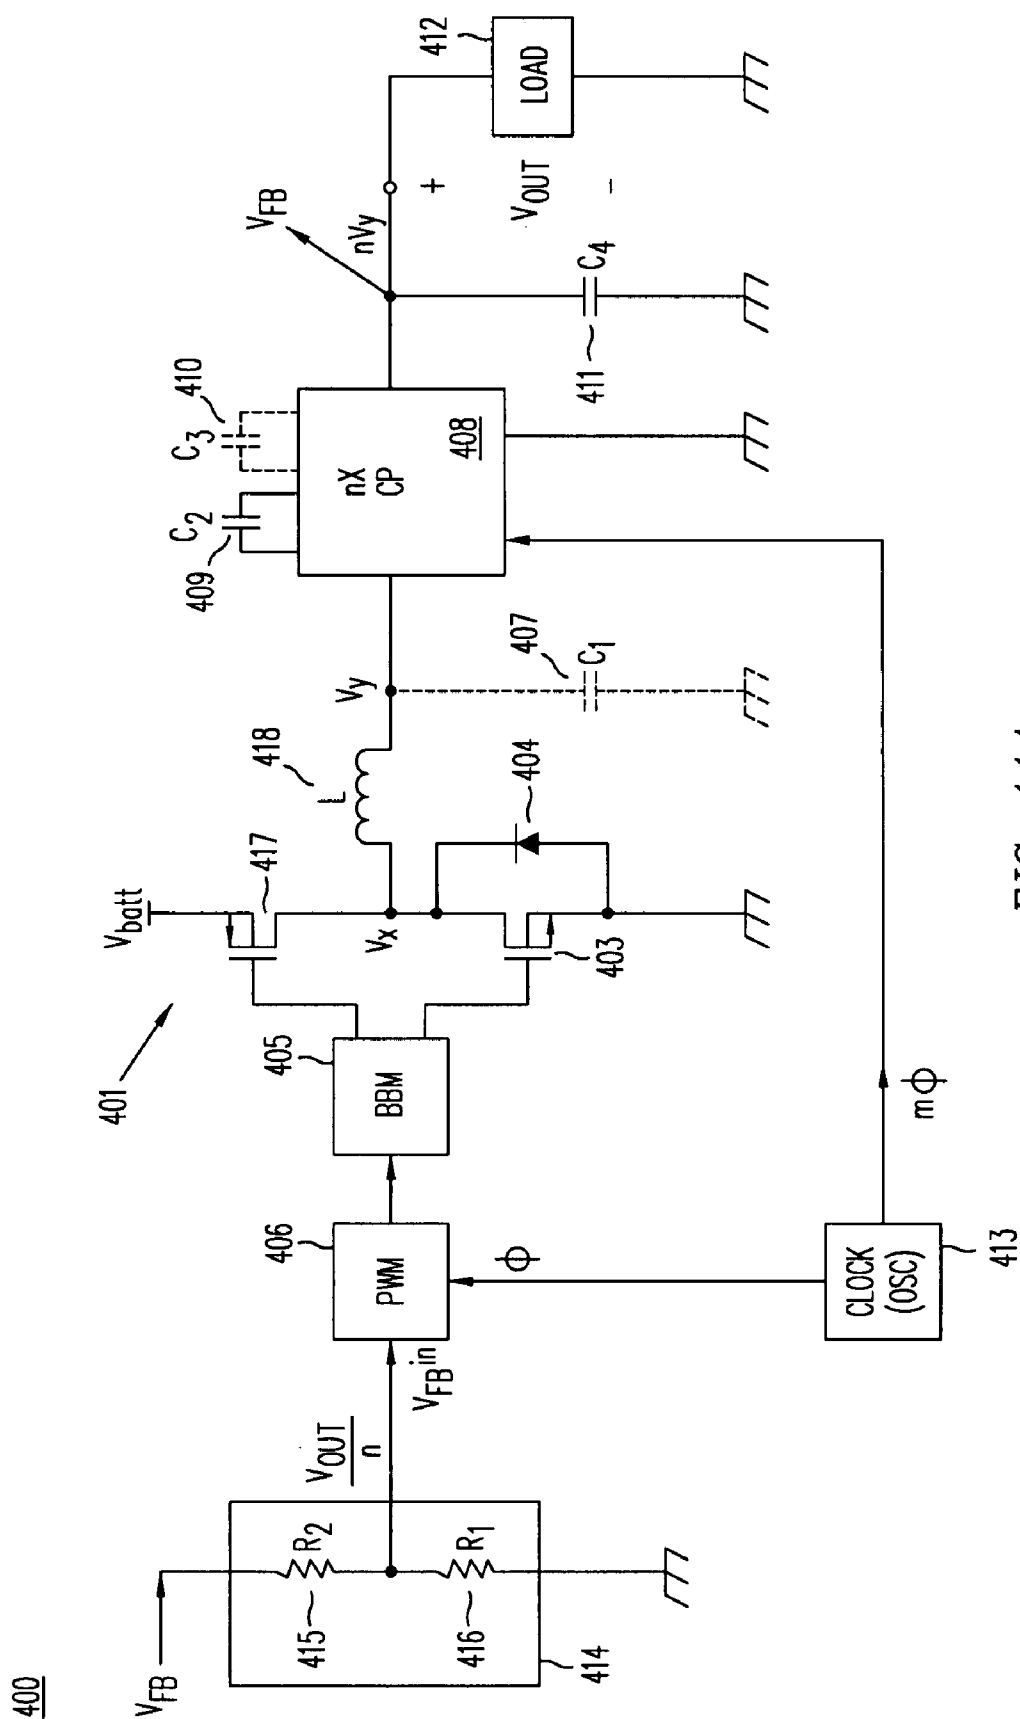


FIG. 14A

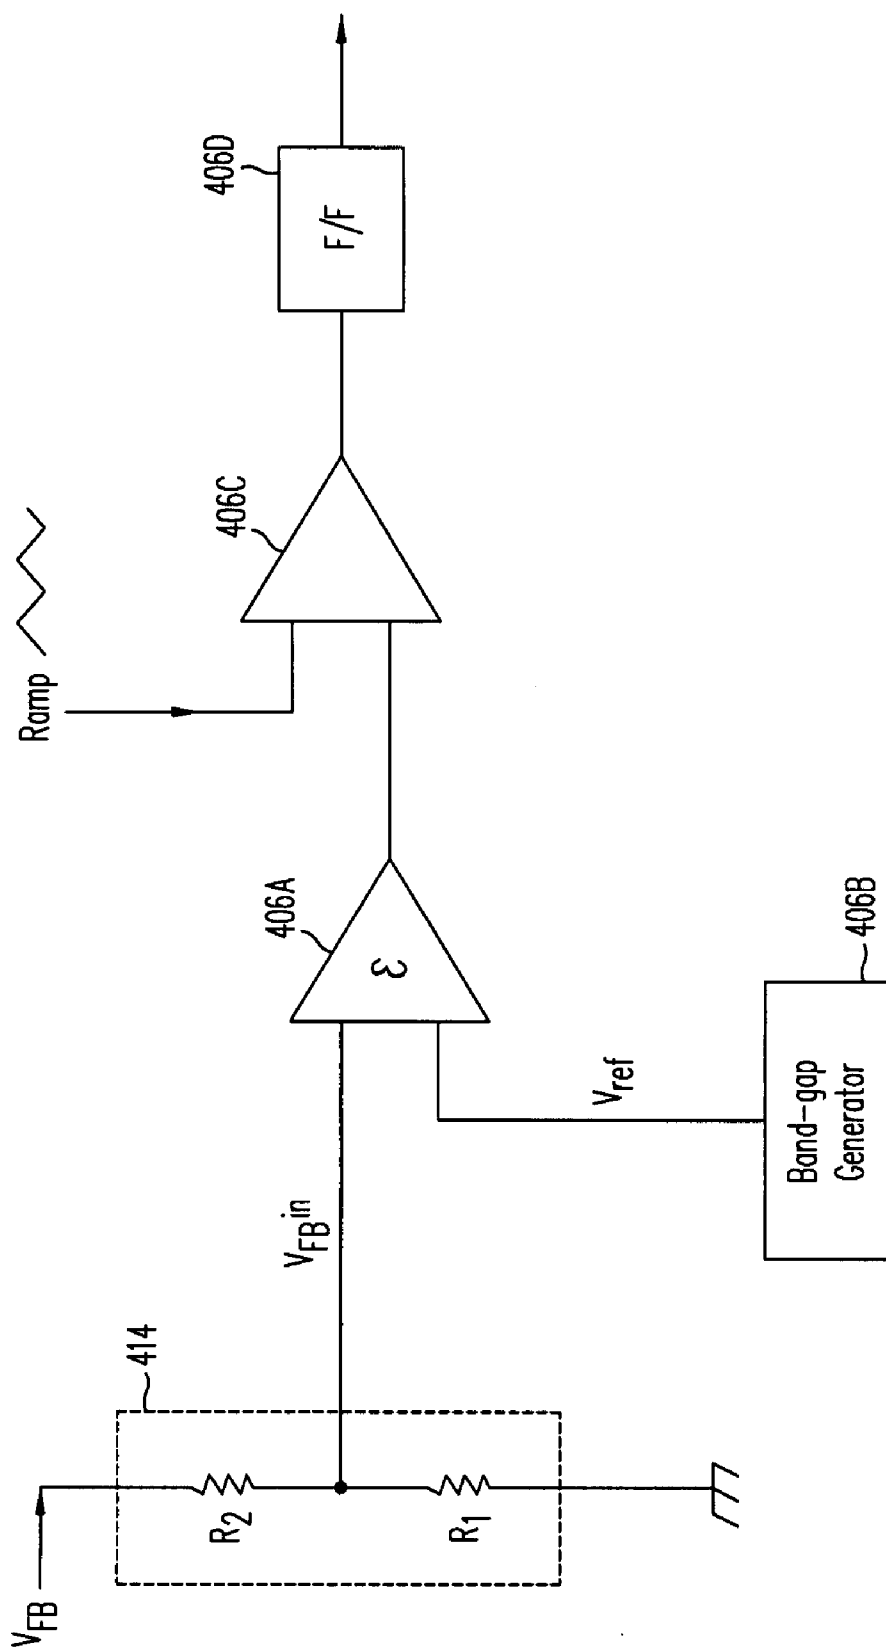


FIG. 14B

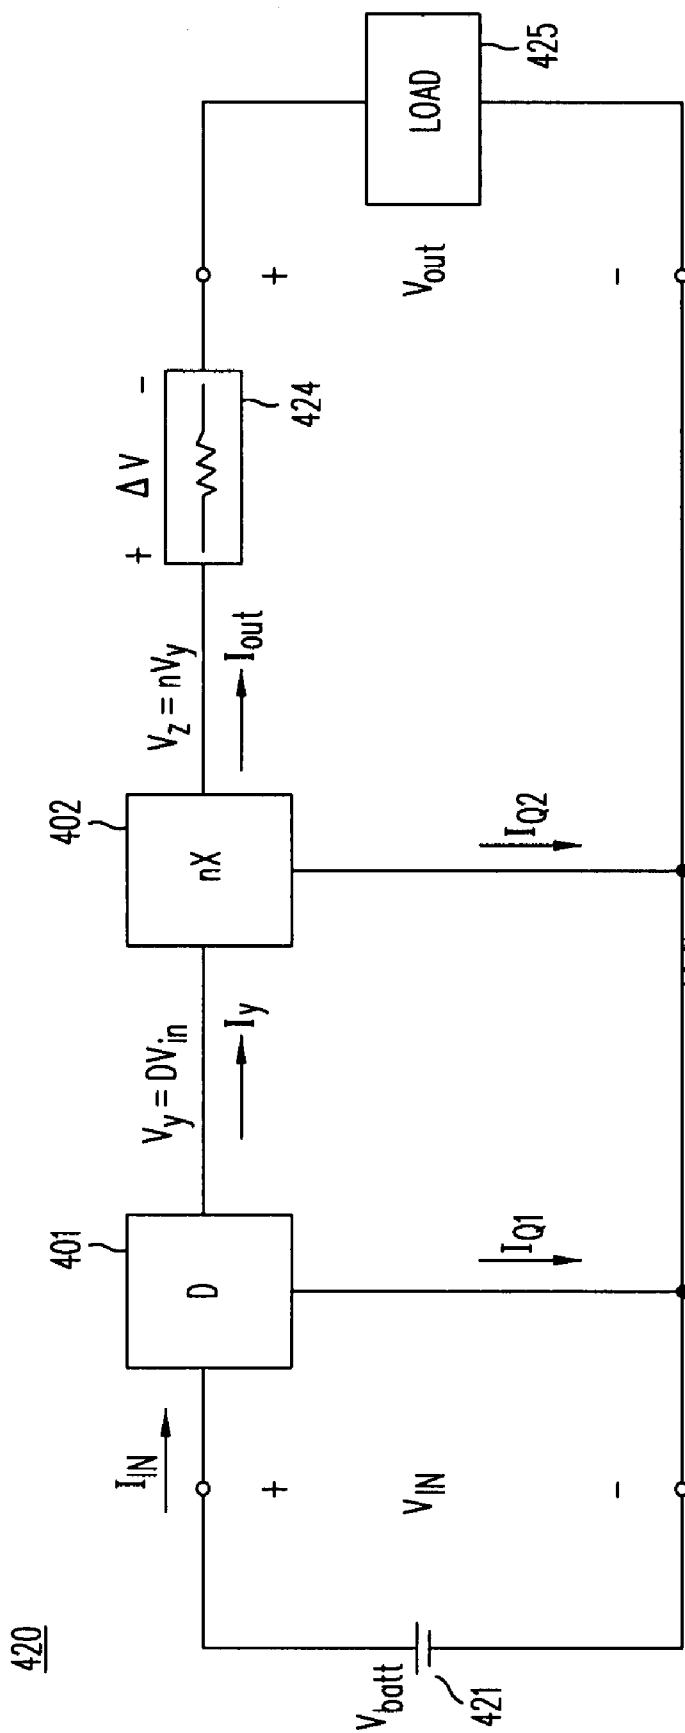
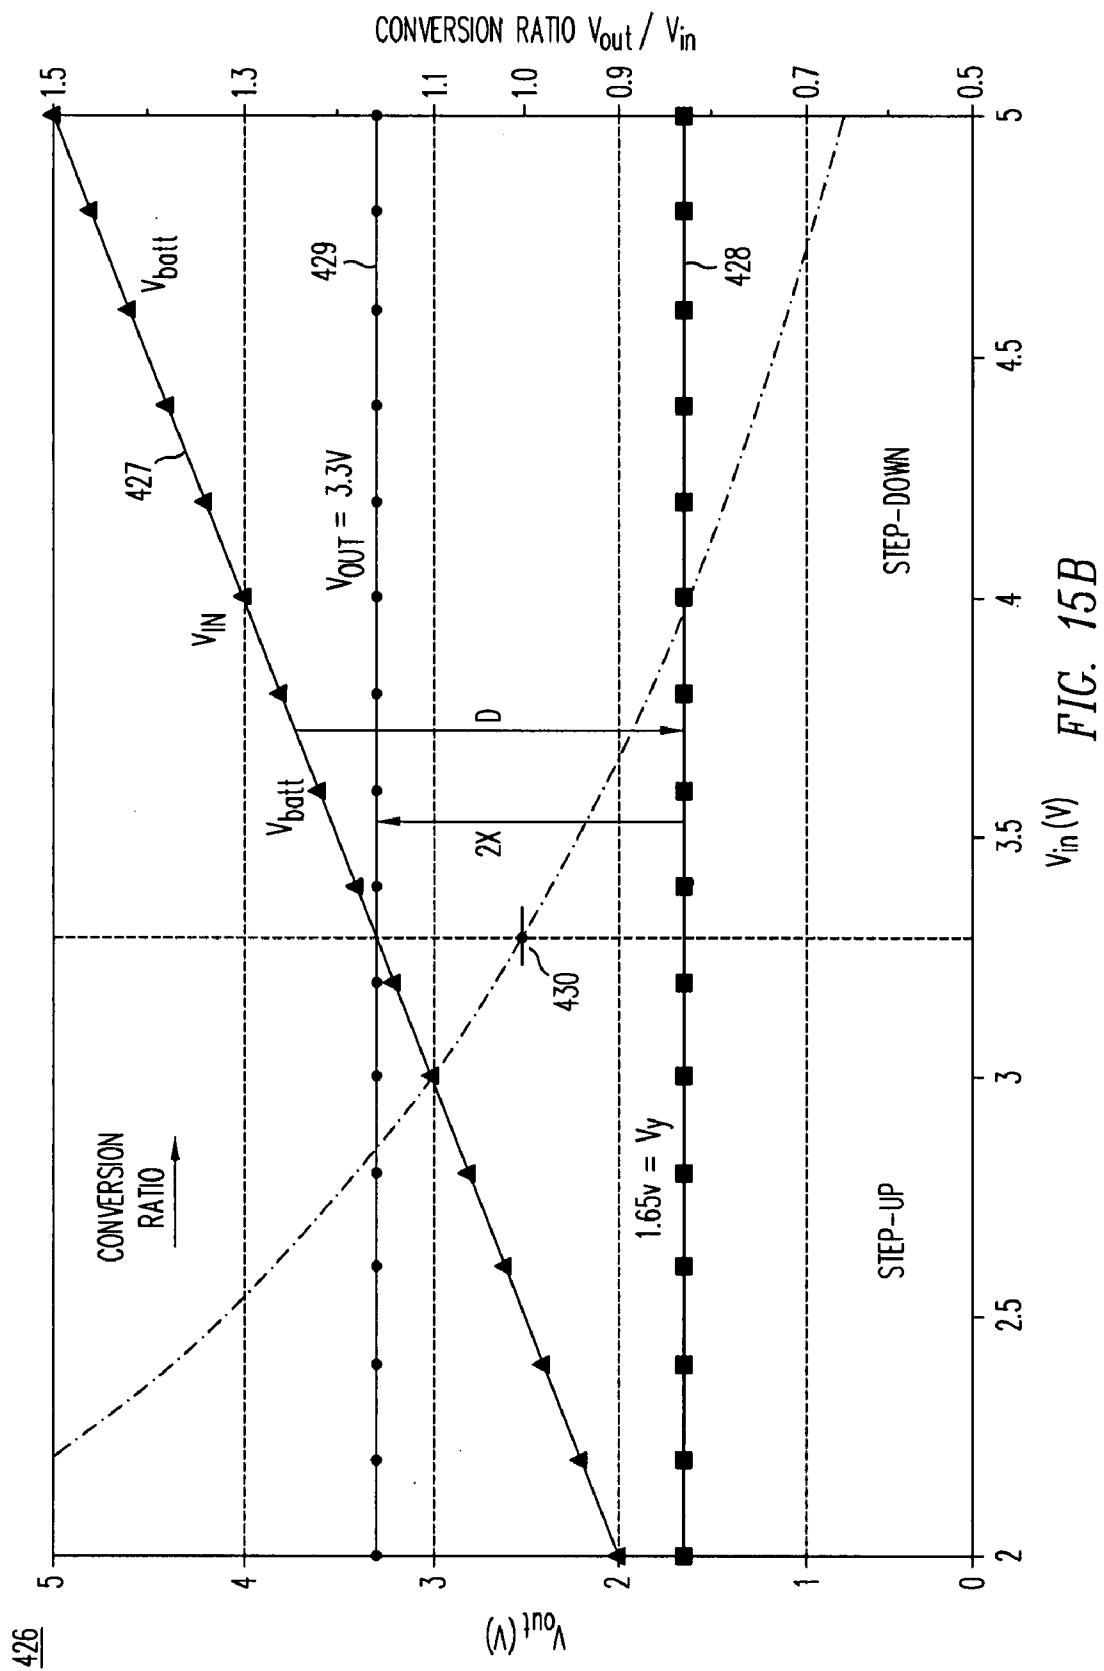


FIG. 15A



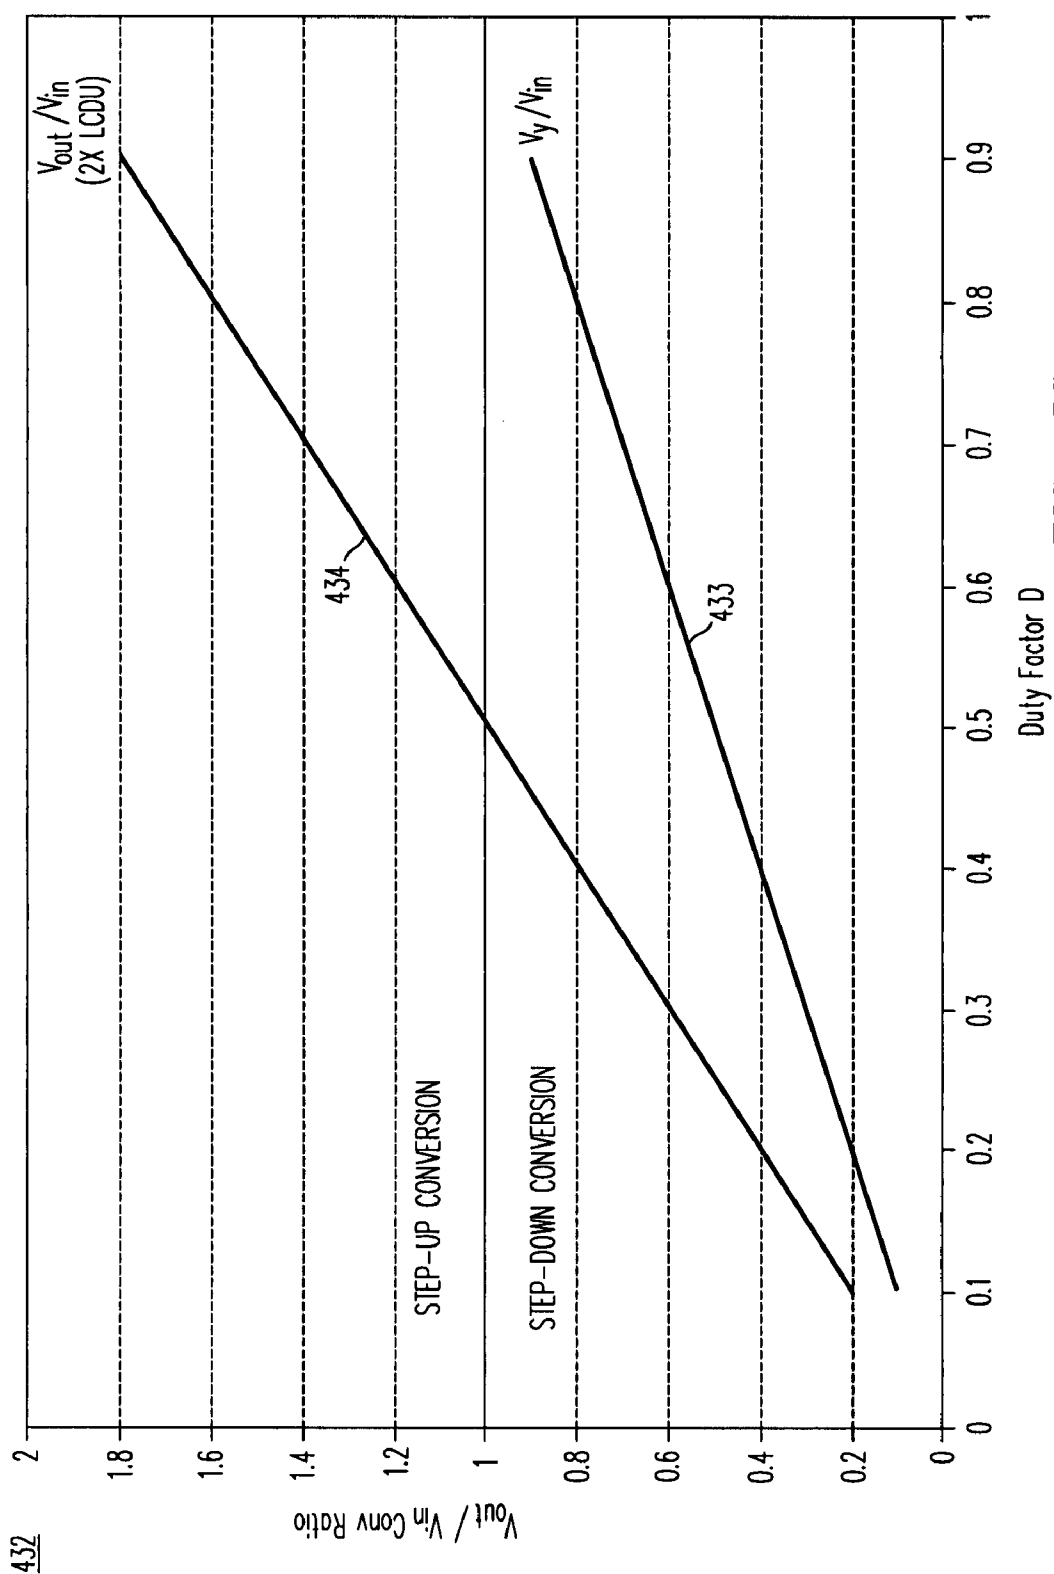
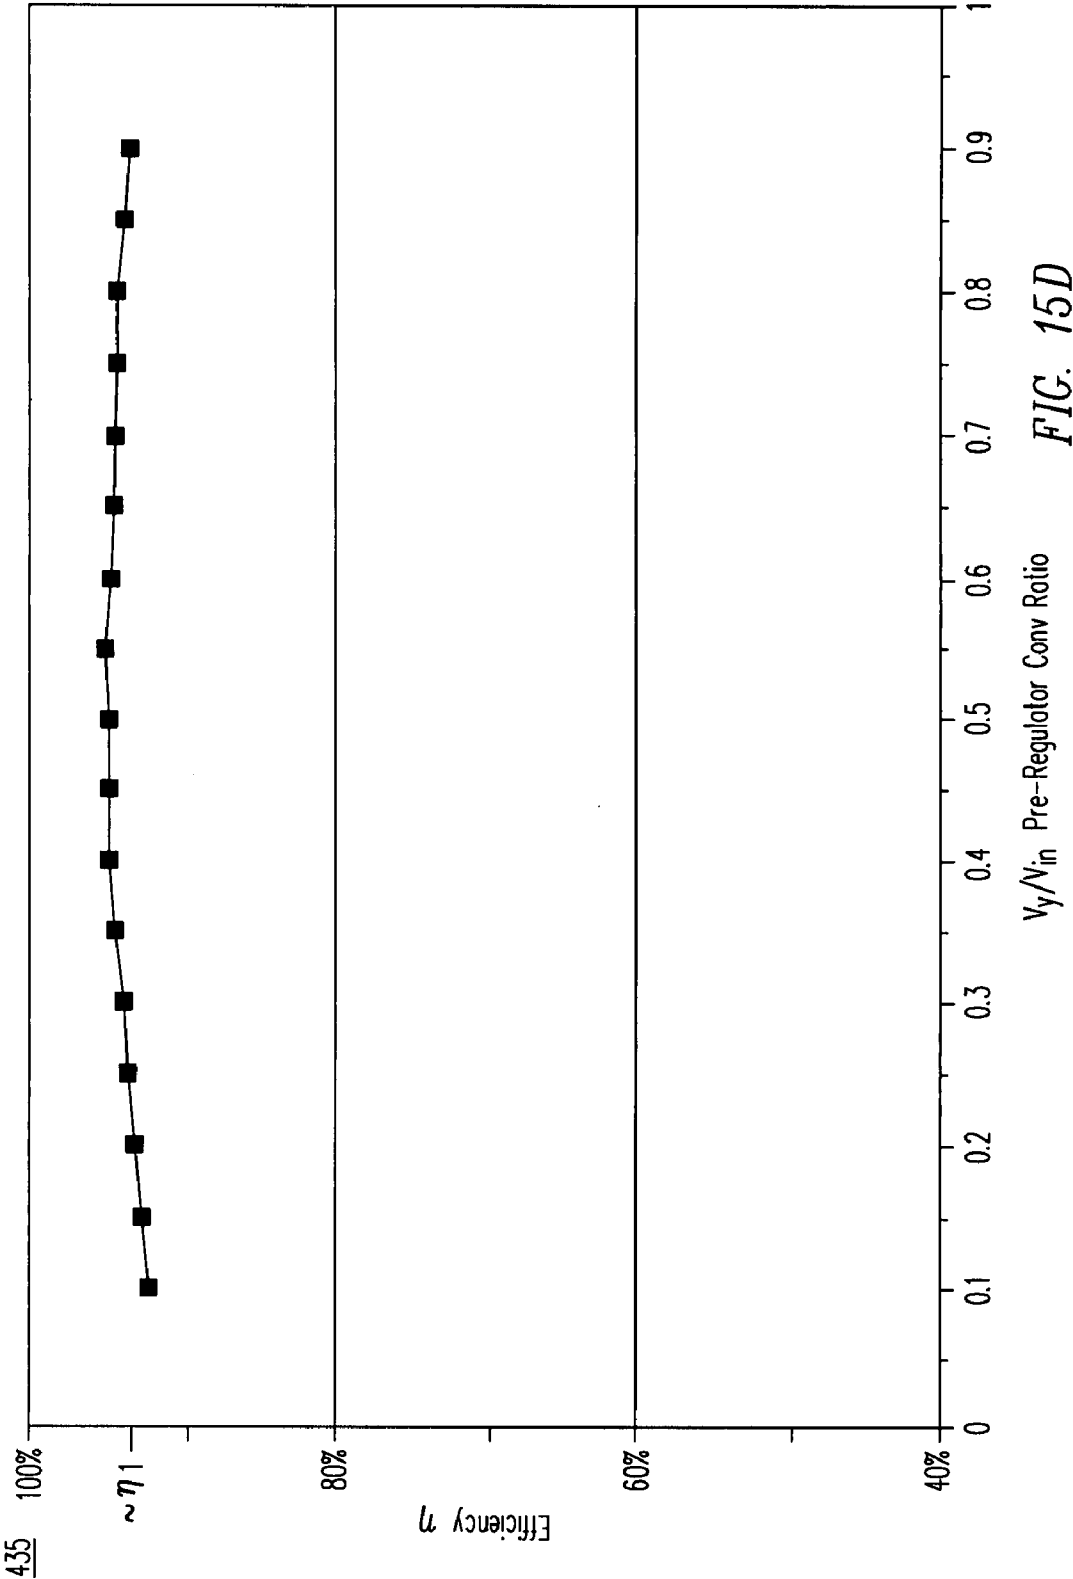


FIG. 15C



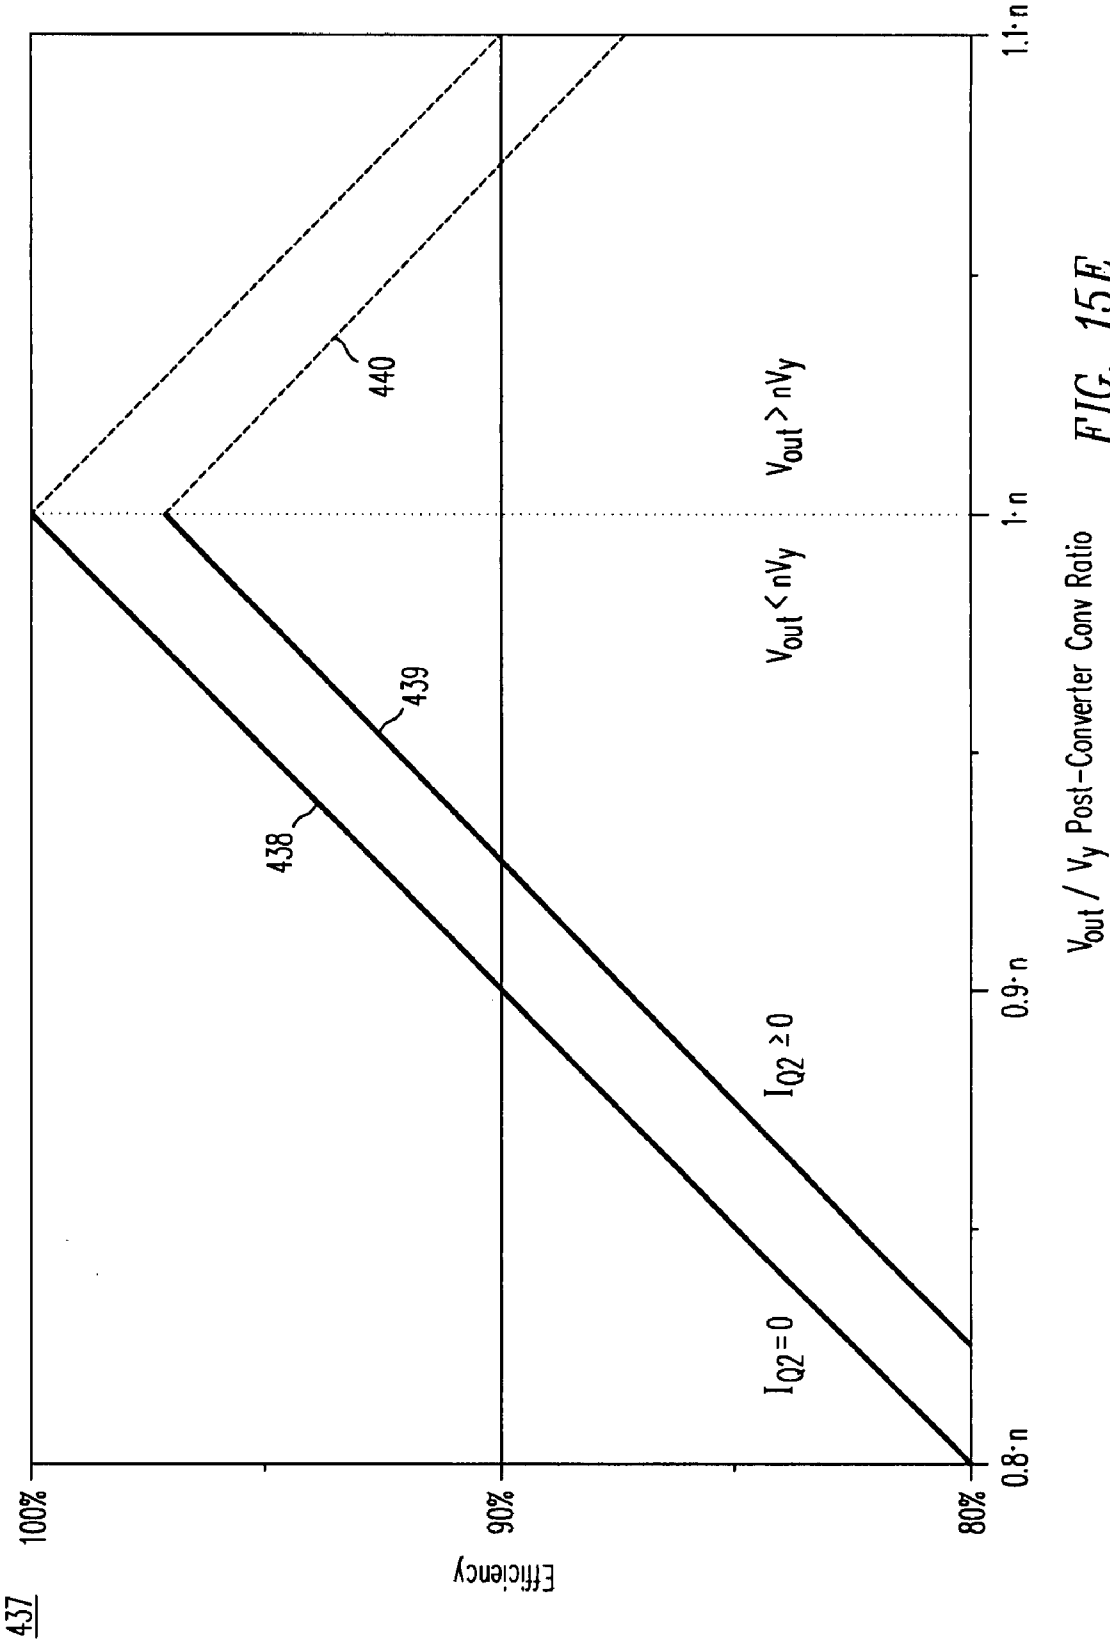


FIG. 15E

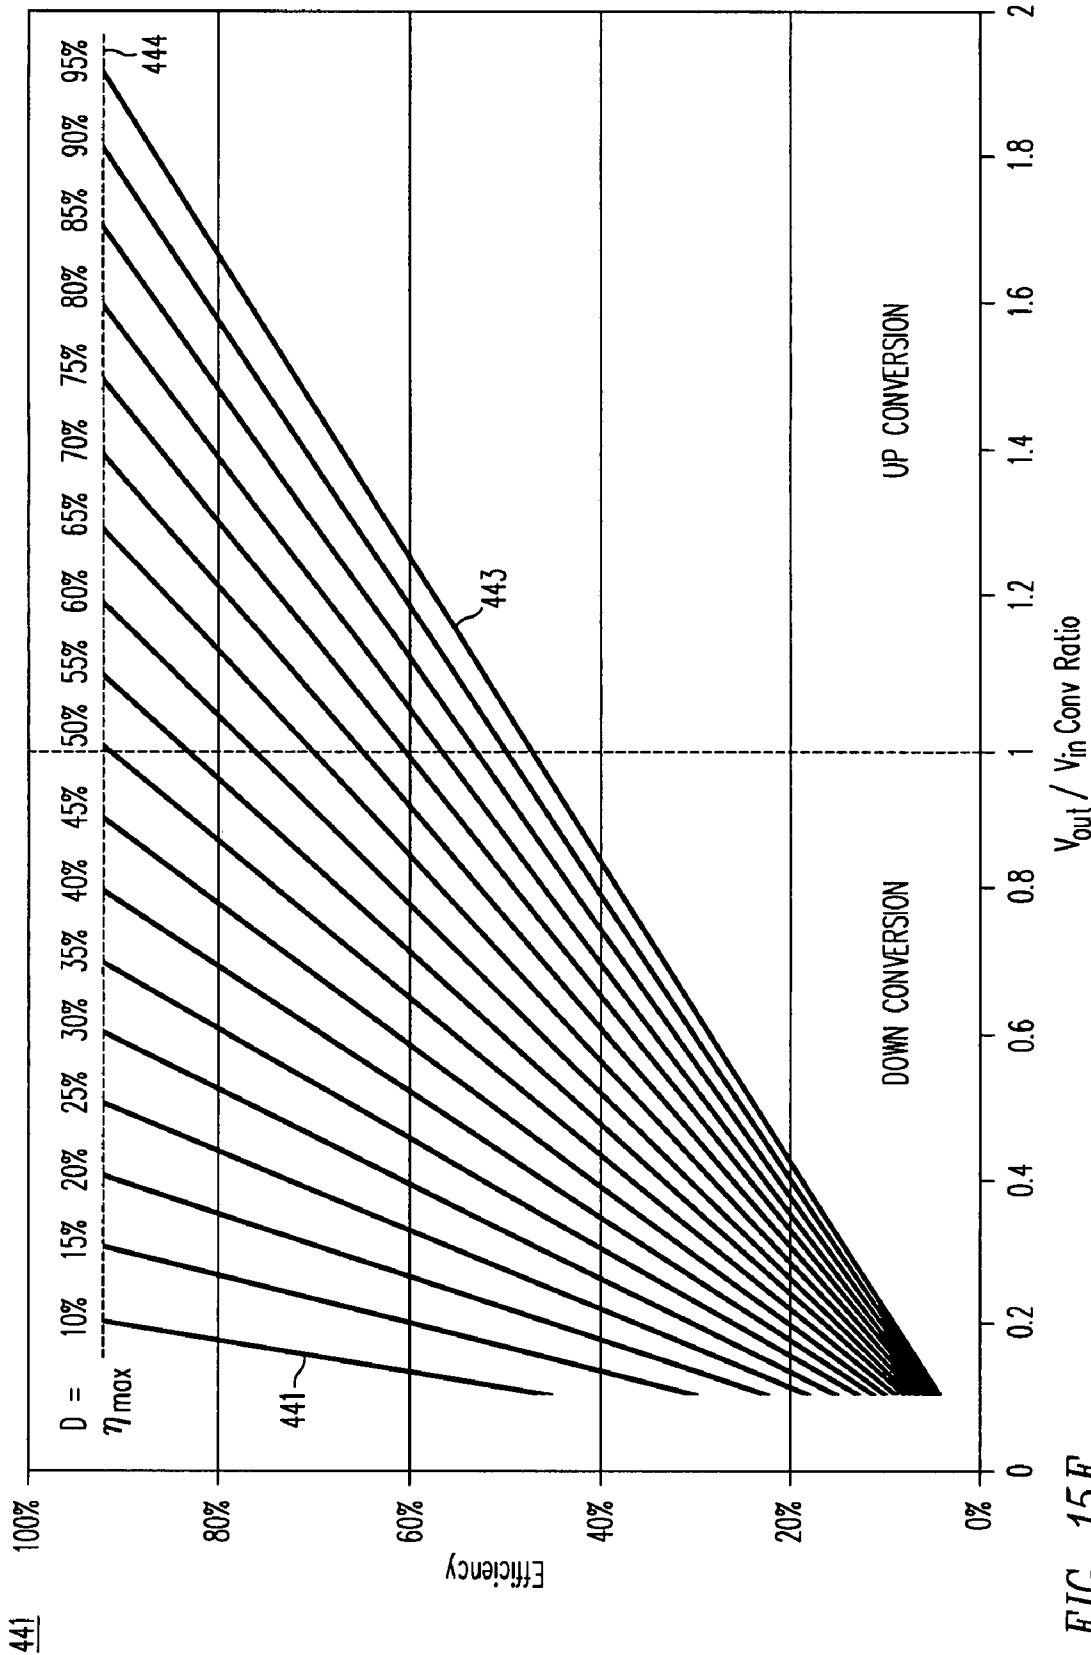


FIG. 15F

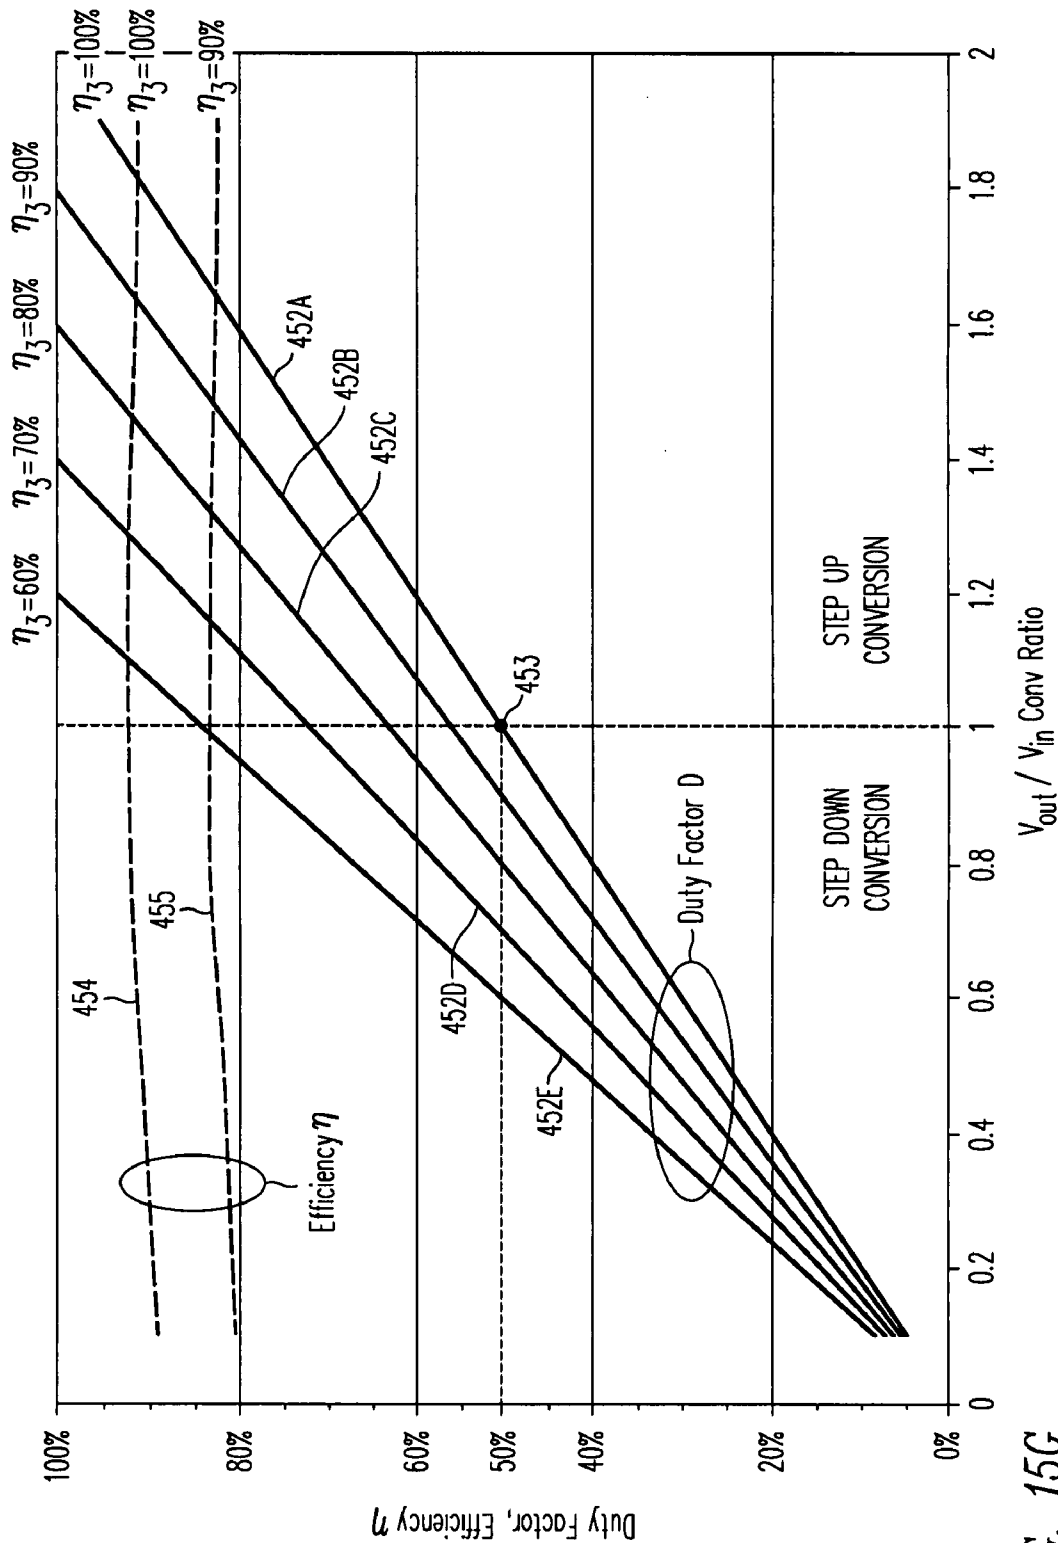


FIG. 15C

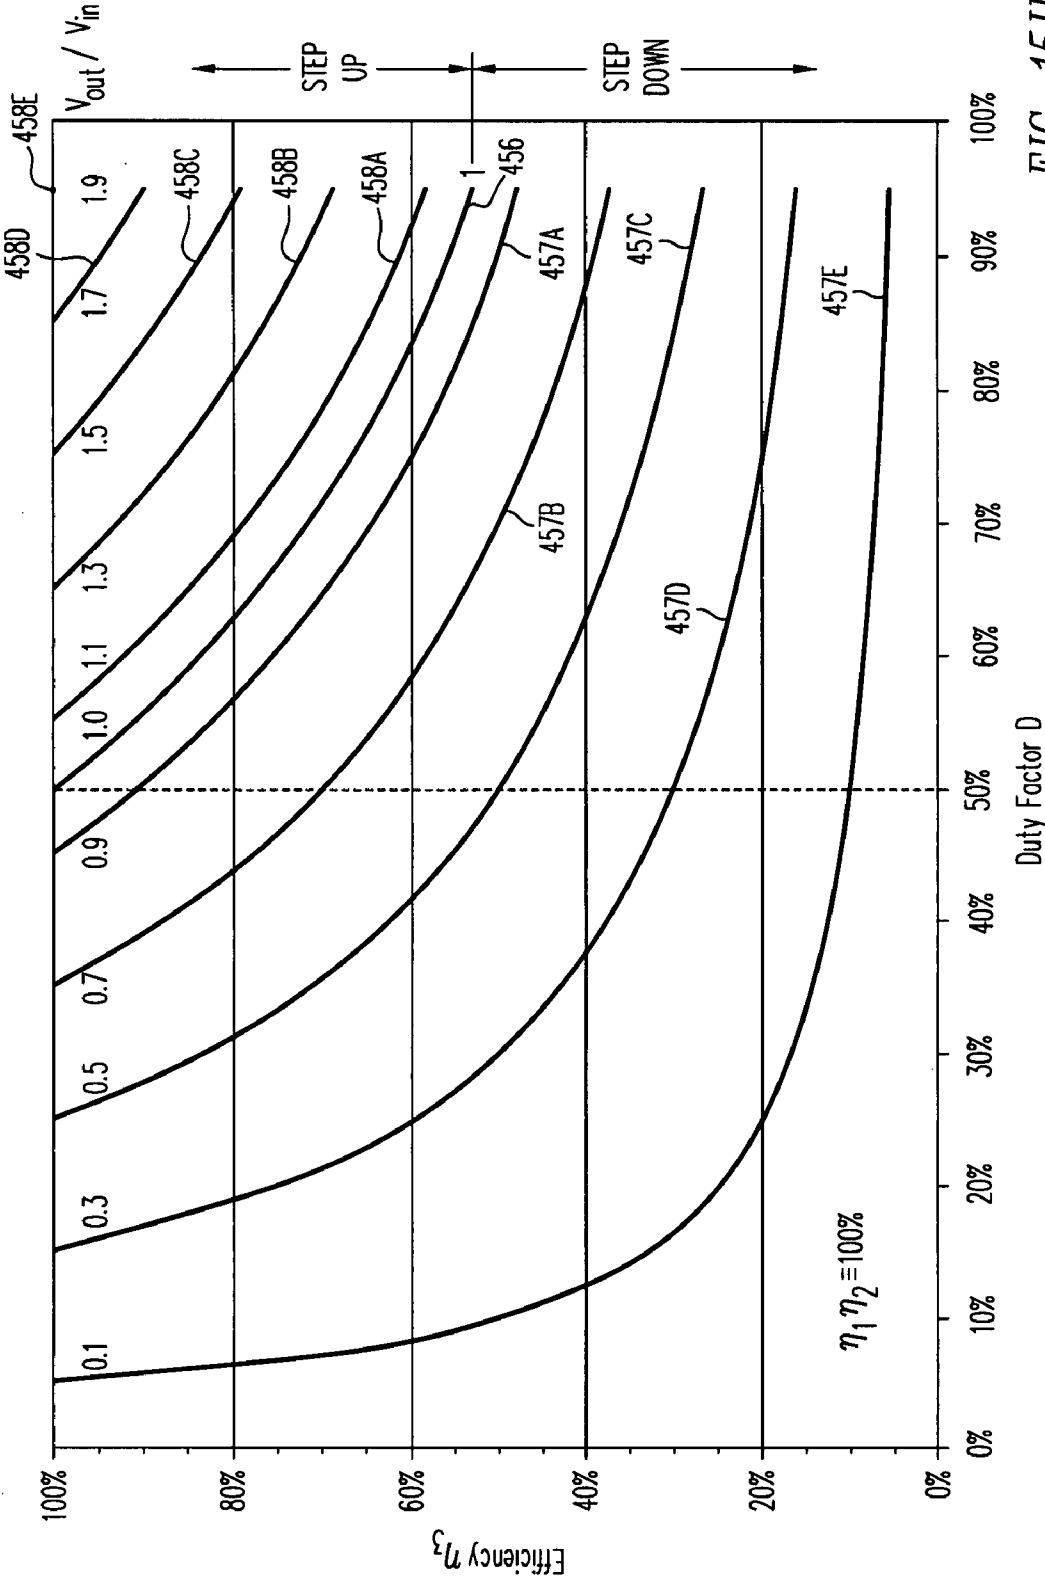


FIG. 15H

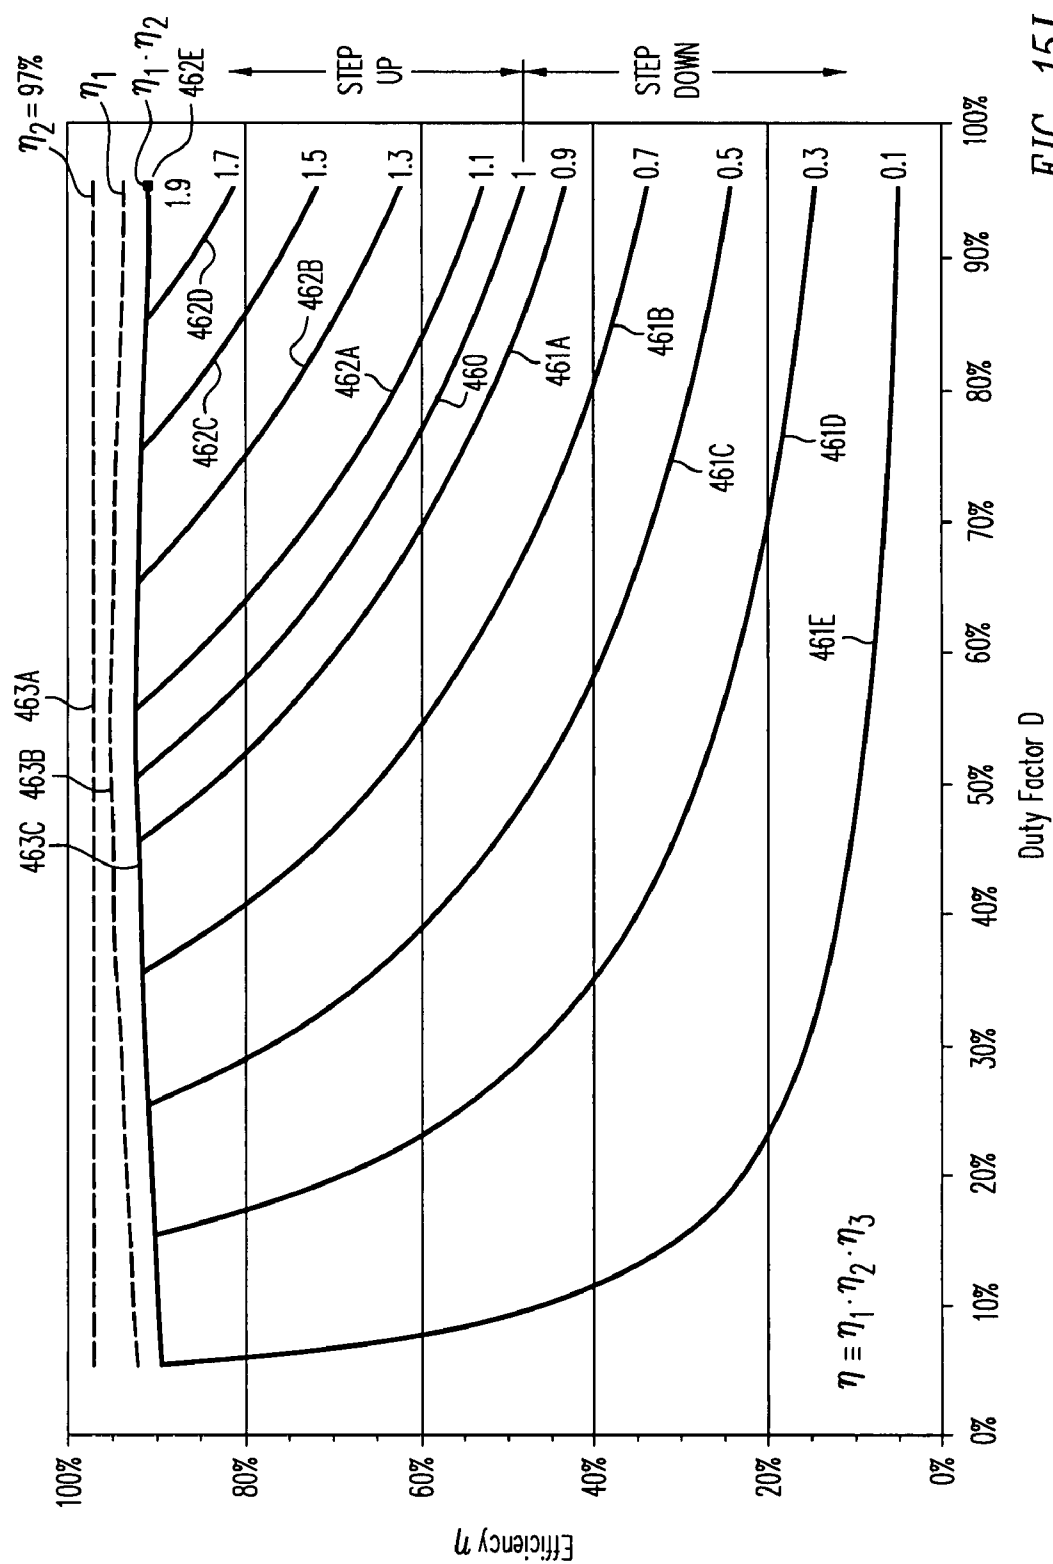


FIG. 15I

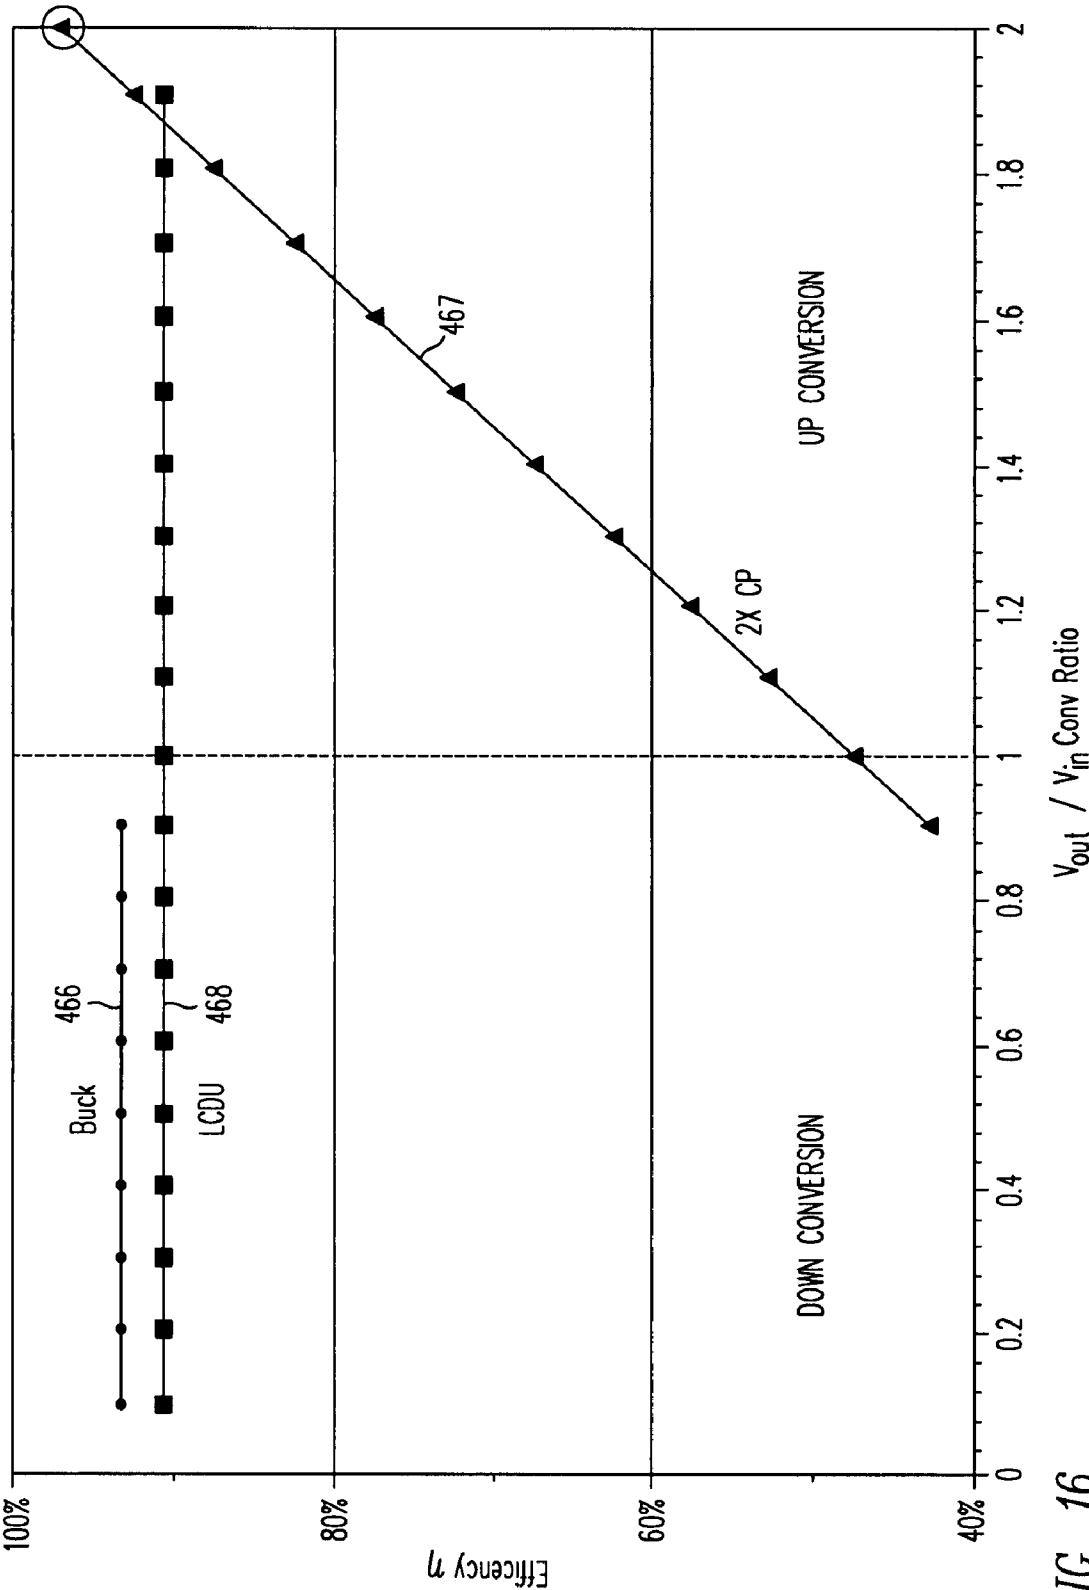


FIG. 16

465

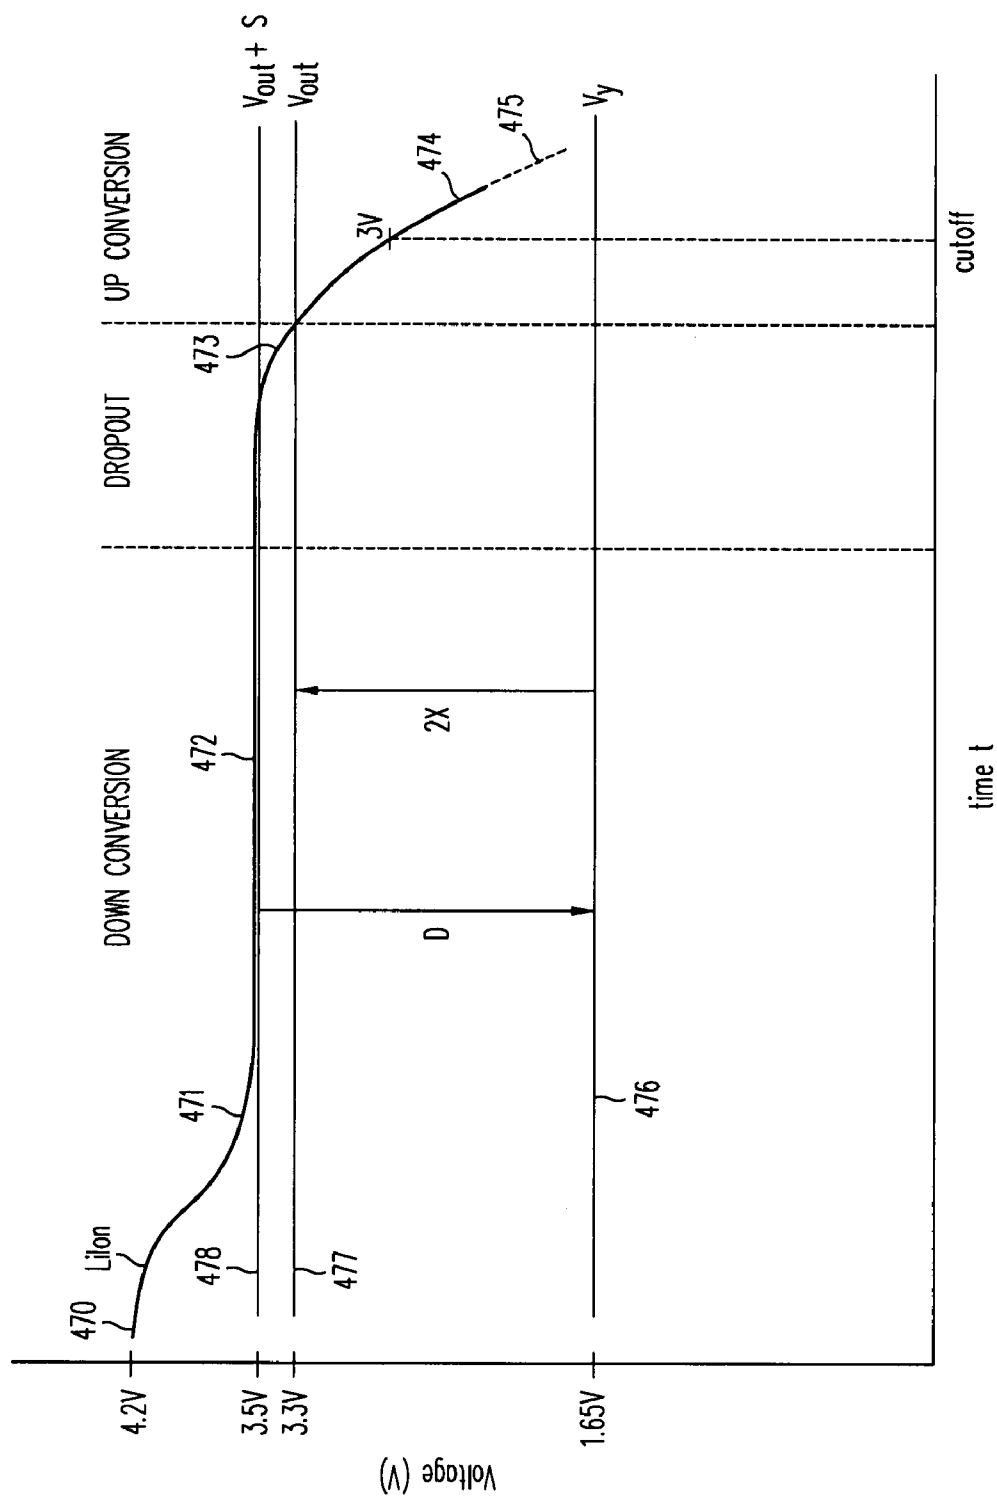


FIG. 17

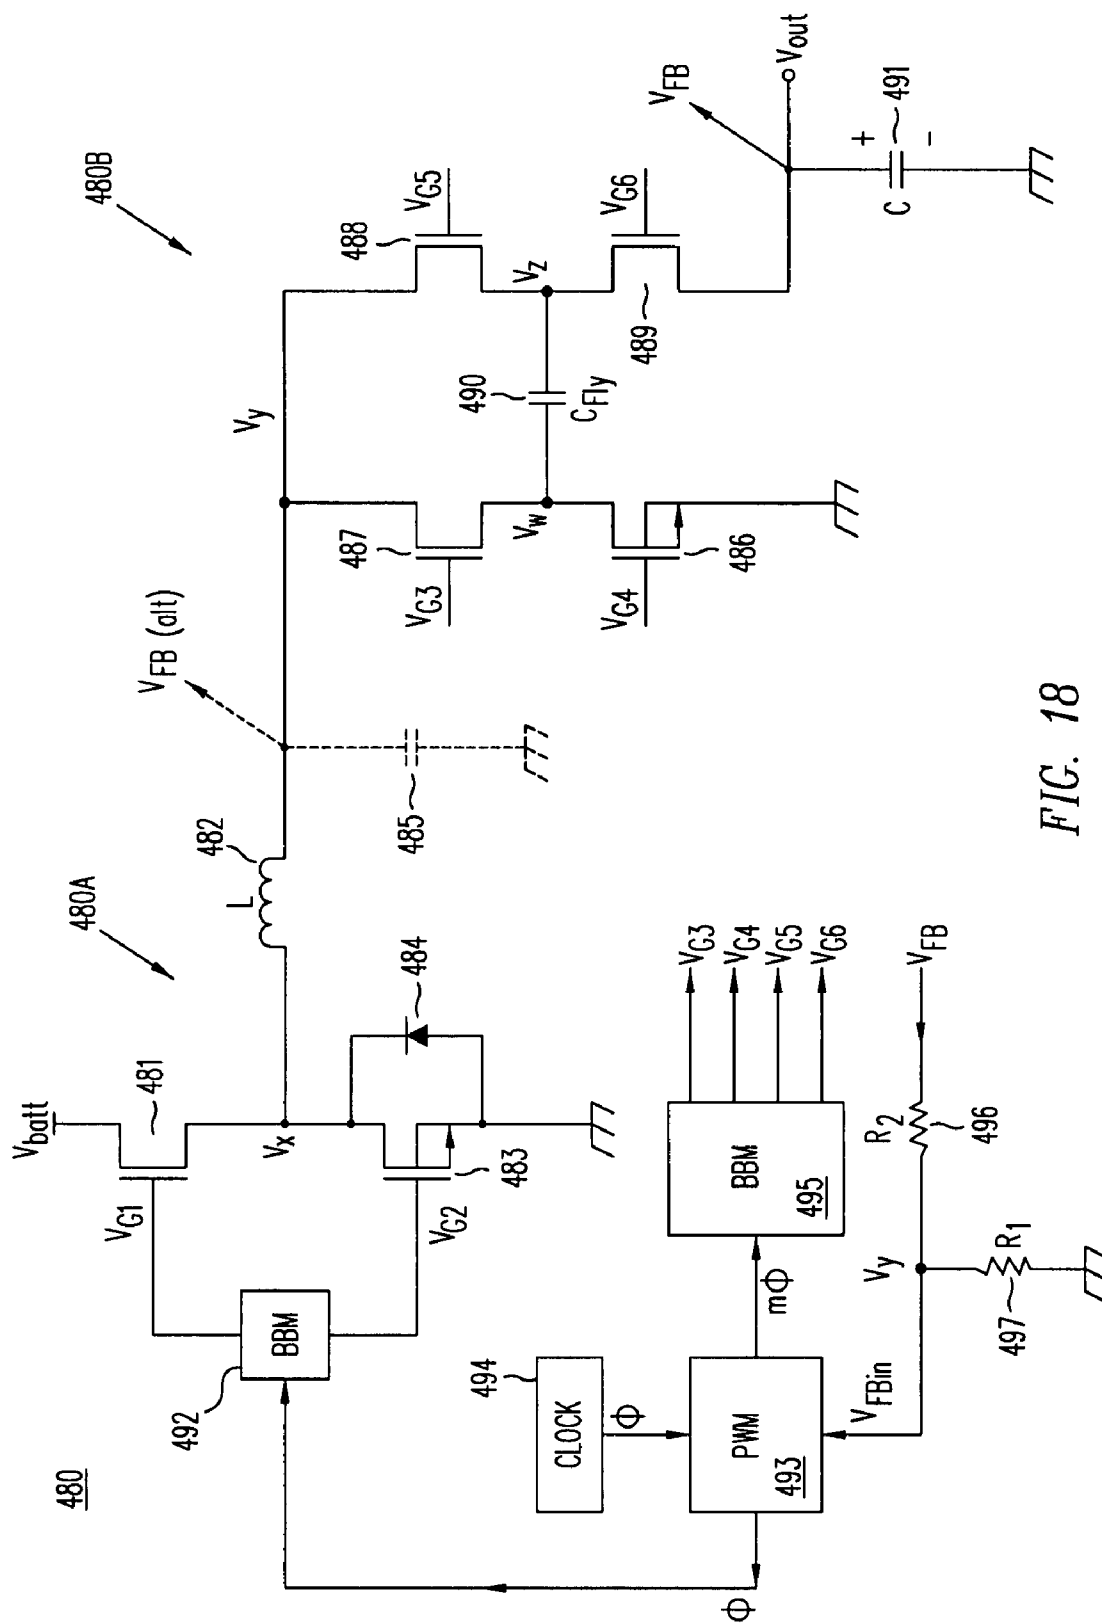


FIG. 18

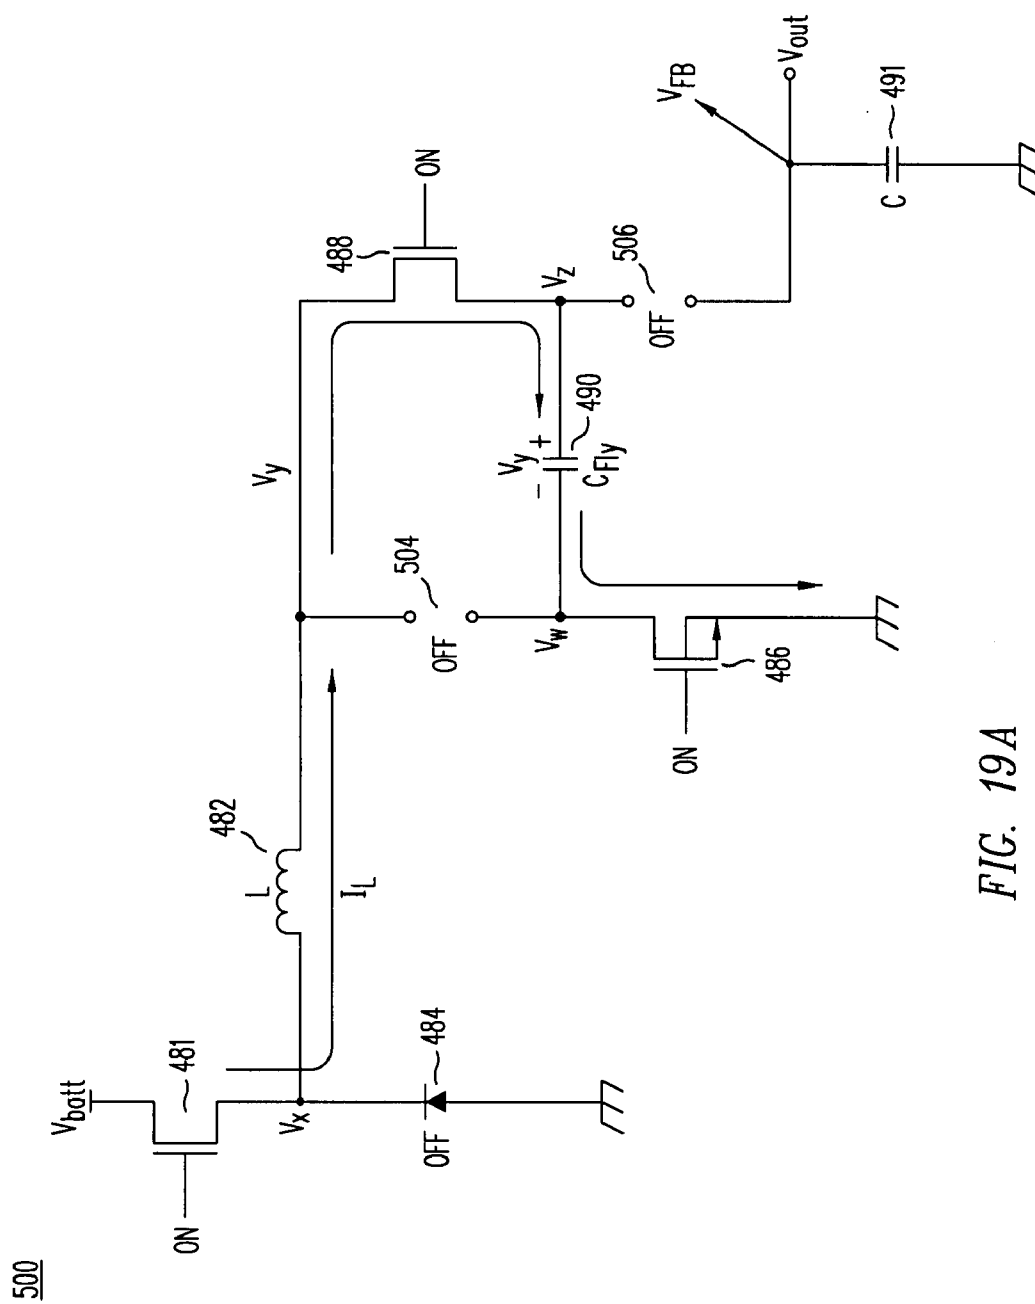


FIG. 19A

520

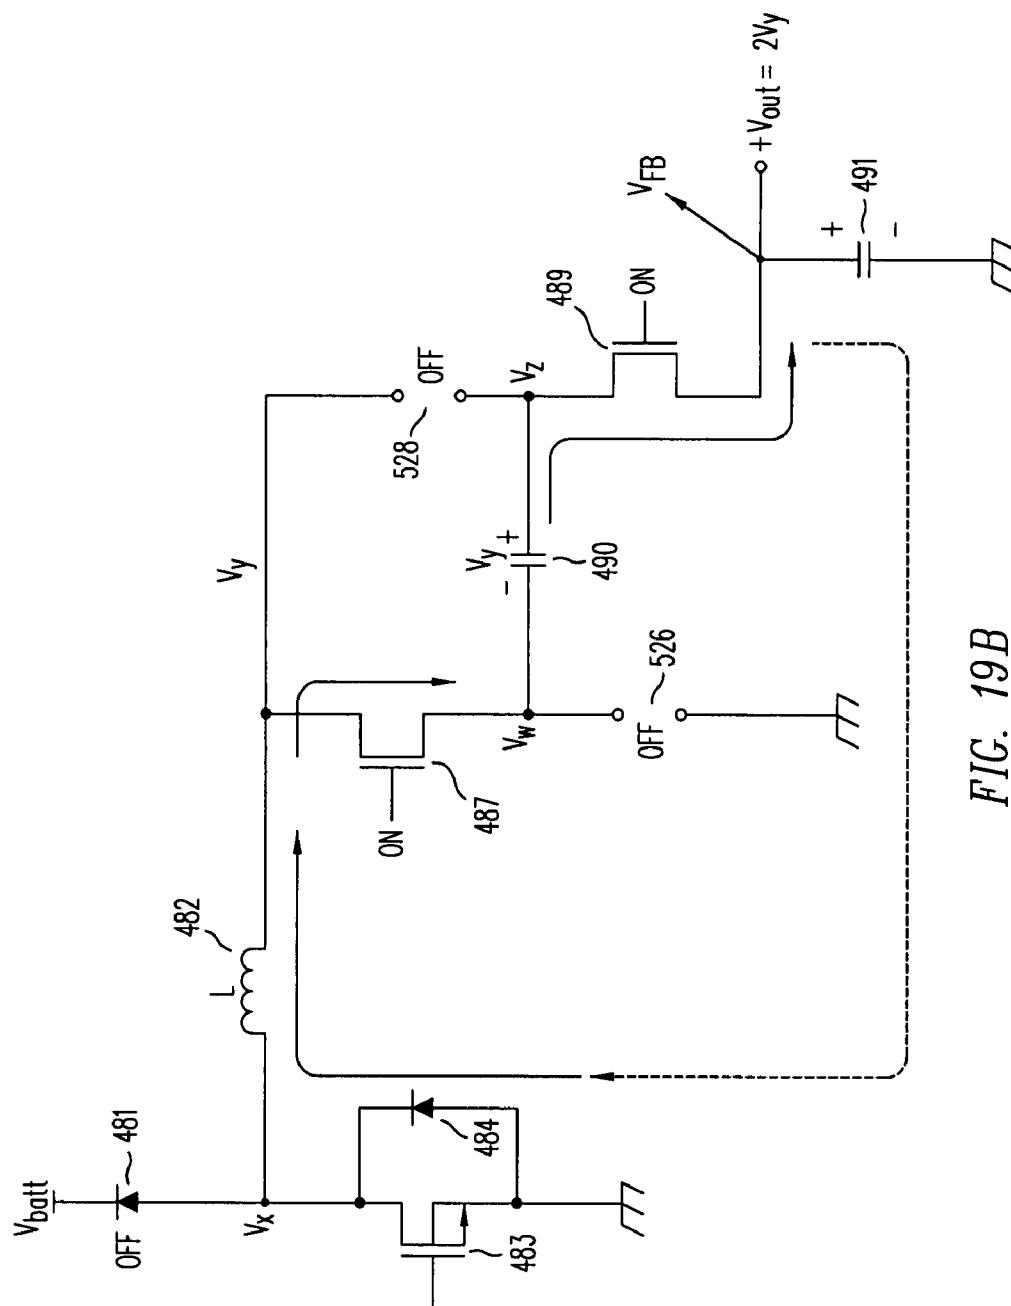
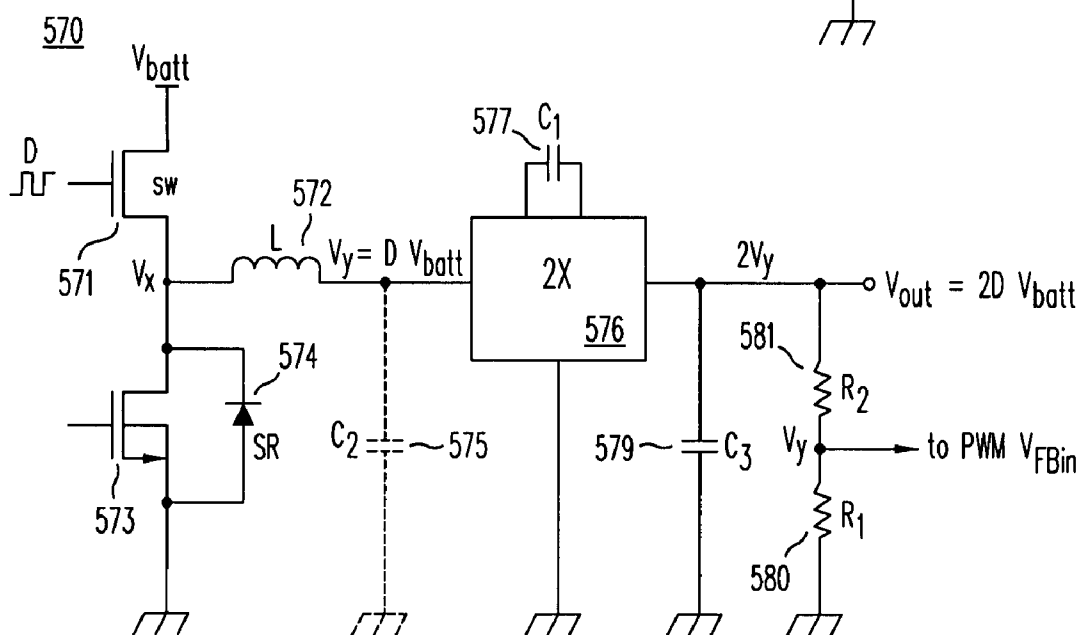
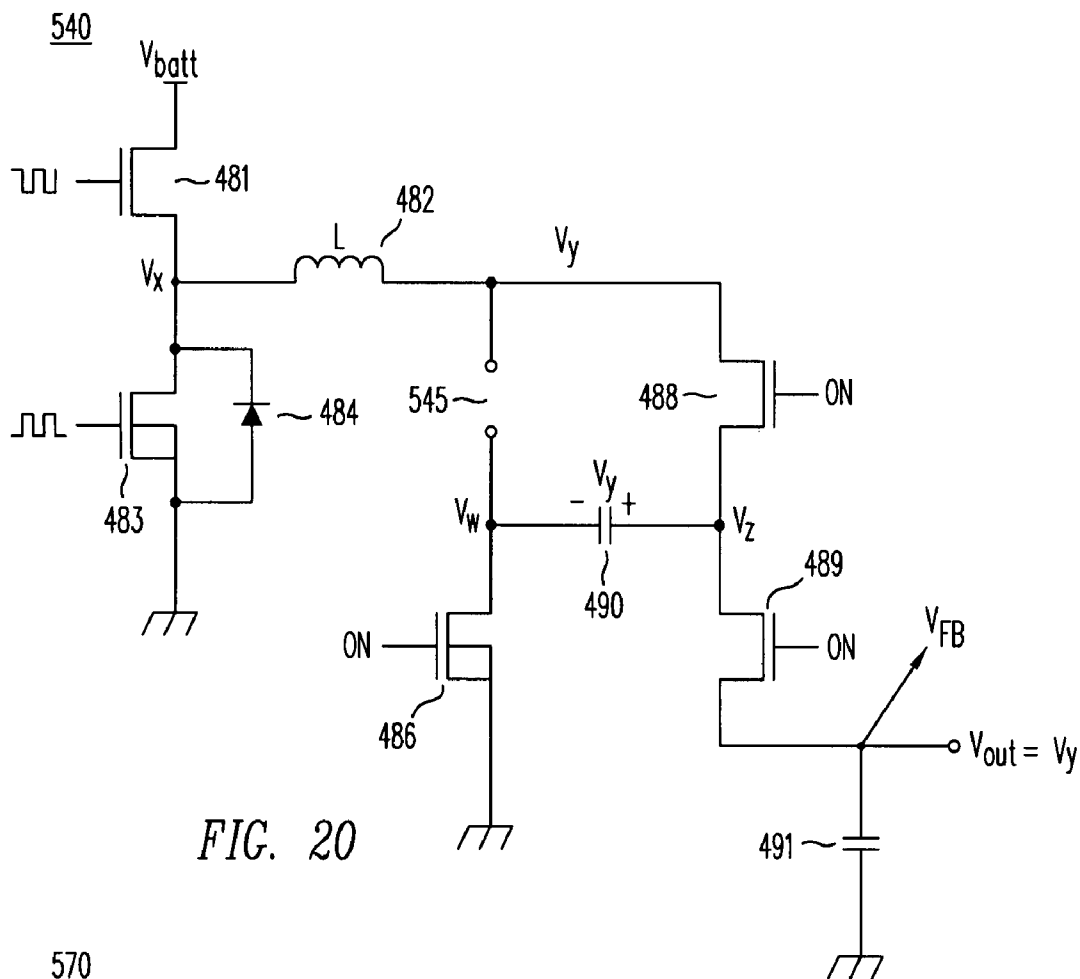


FIG. 19B



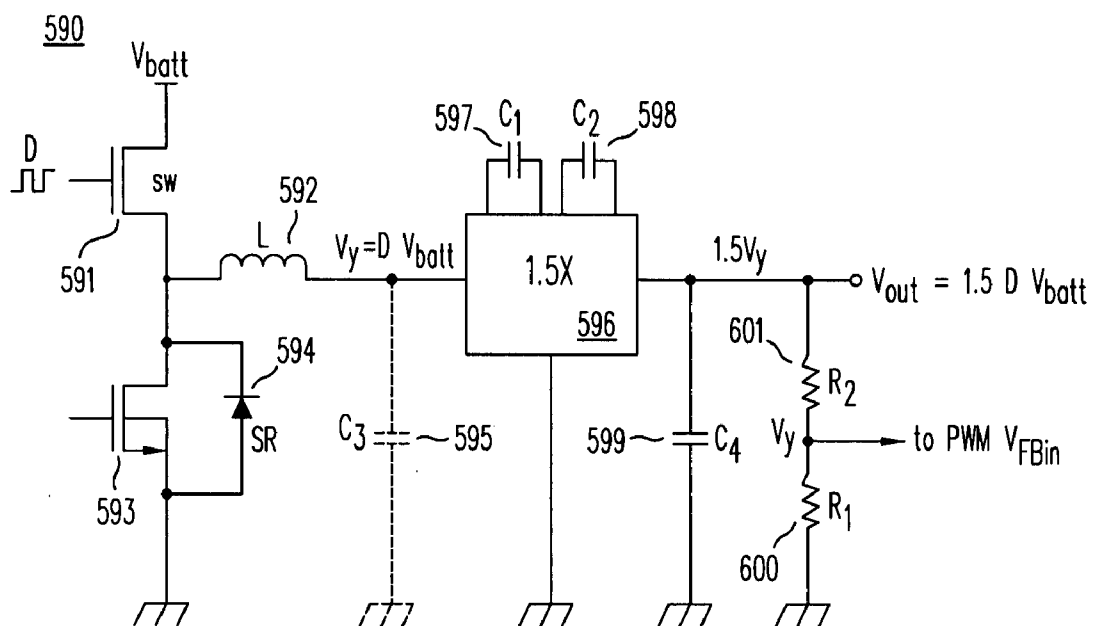


FIG. 21B

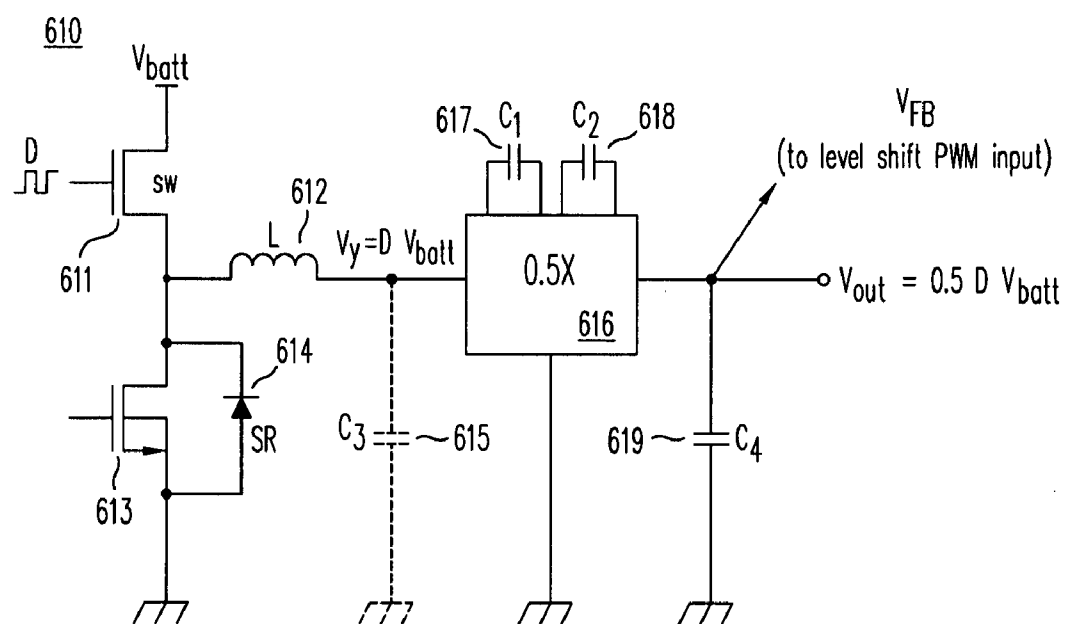


FIG. 21C

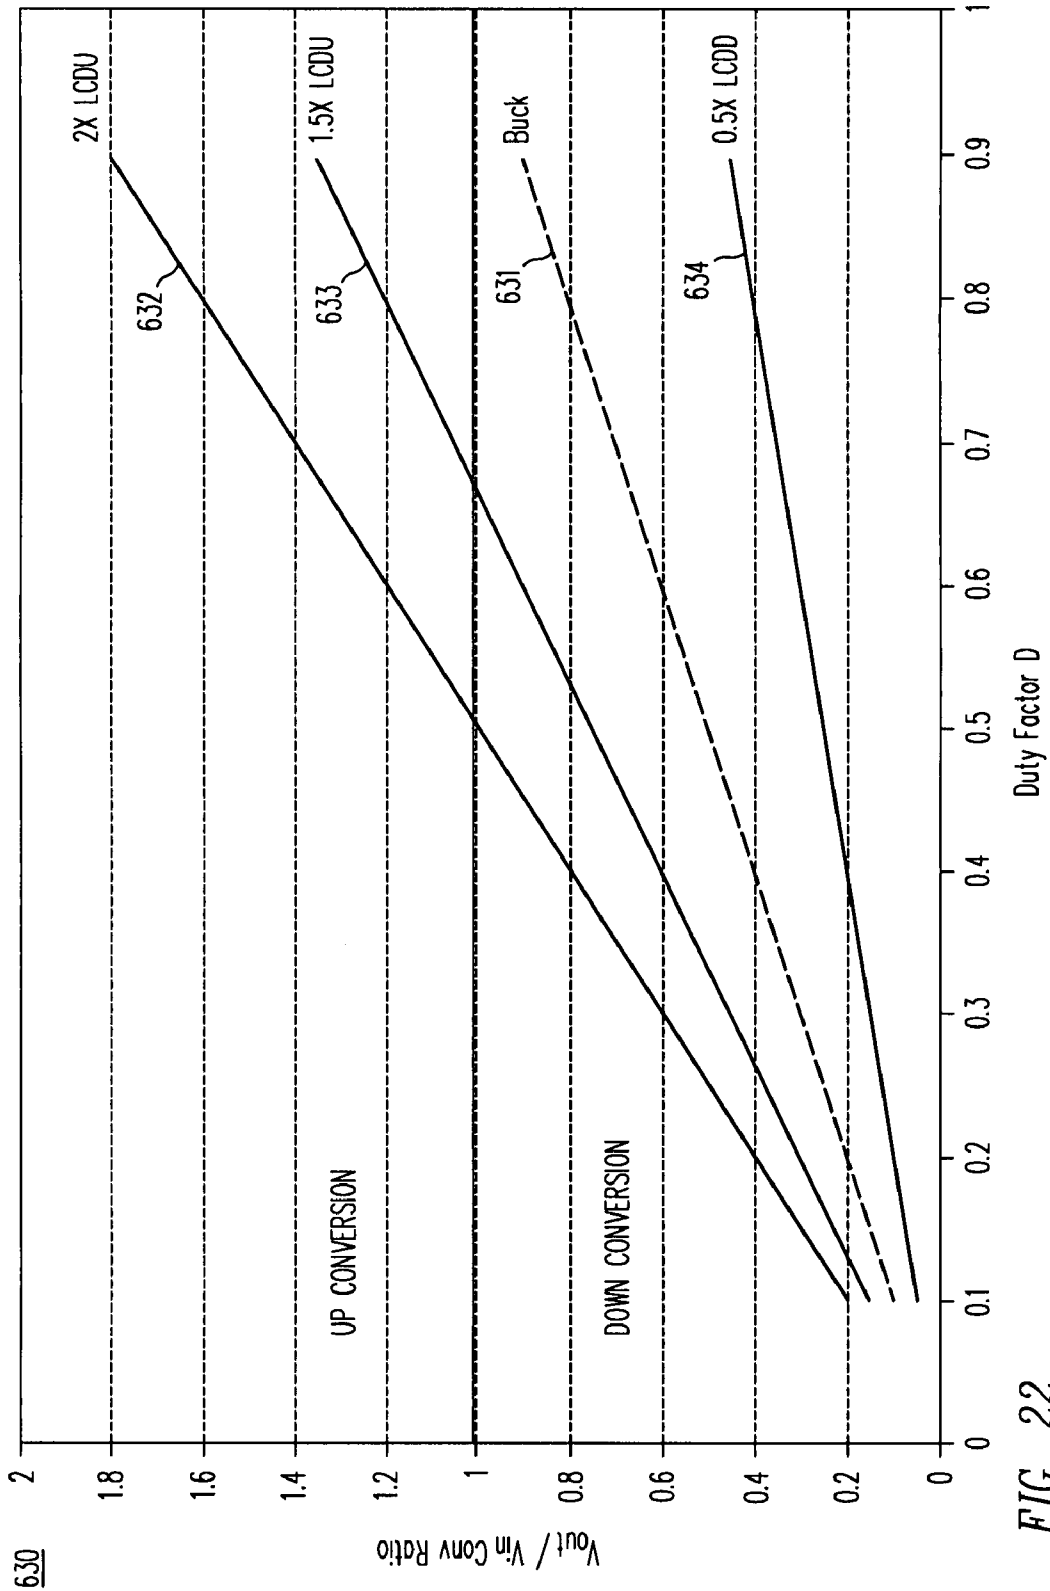


FIG. 22

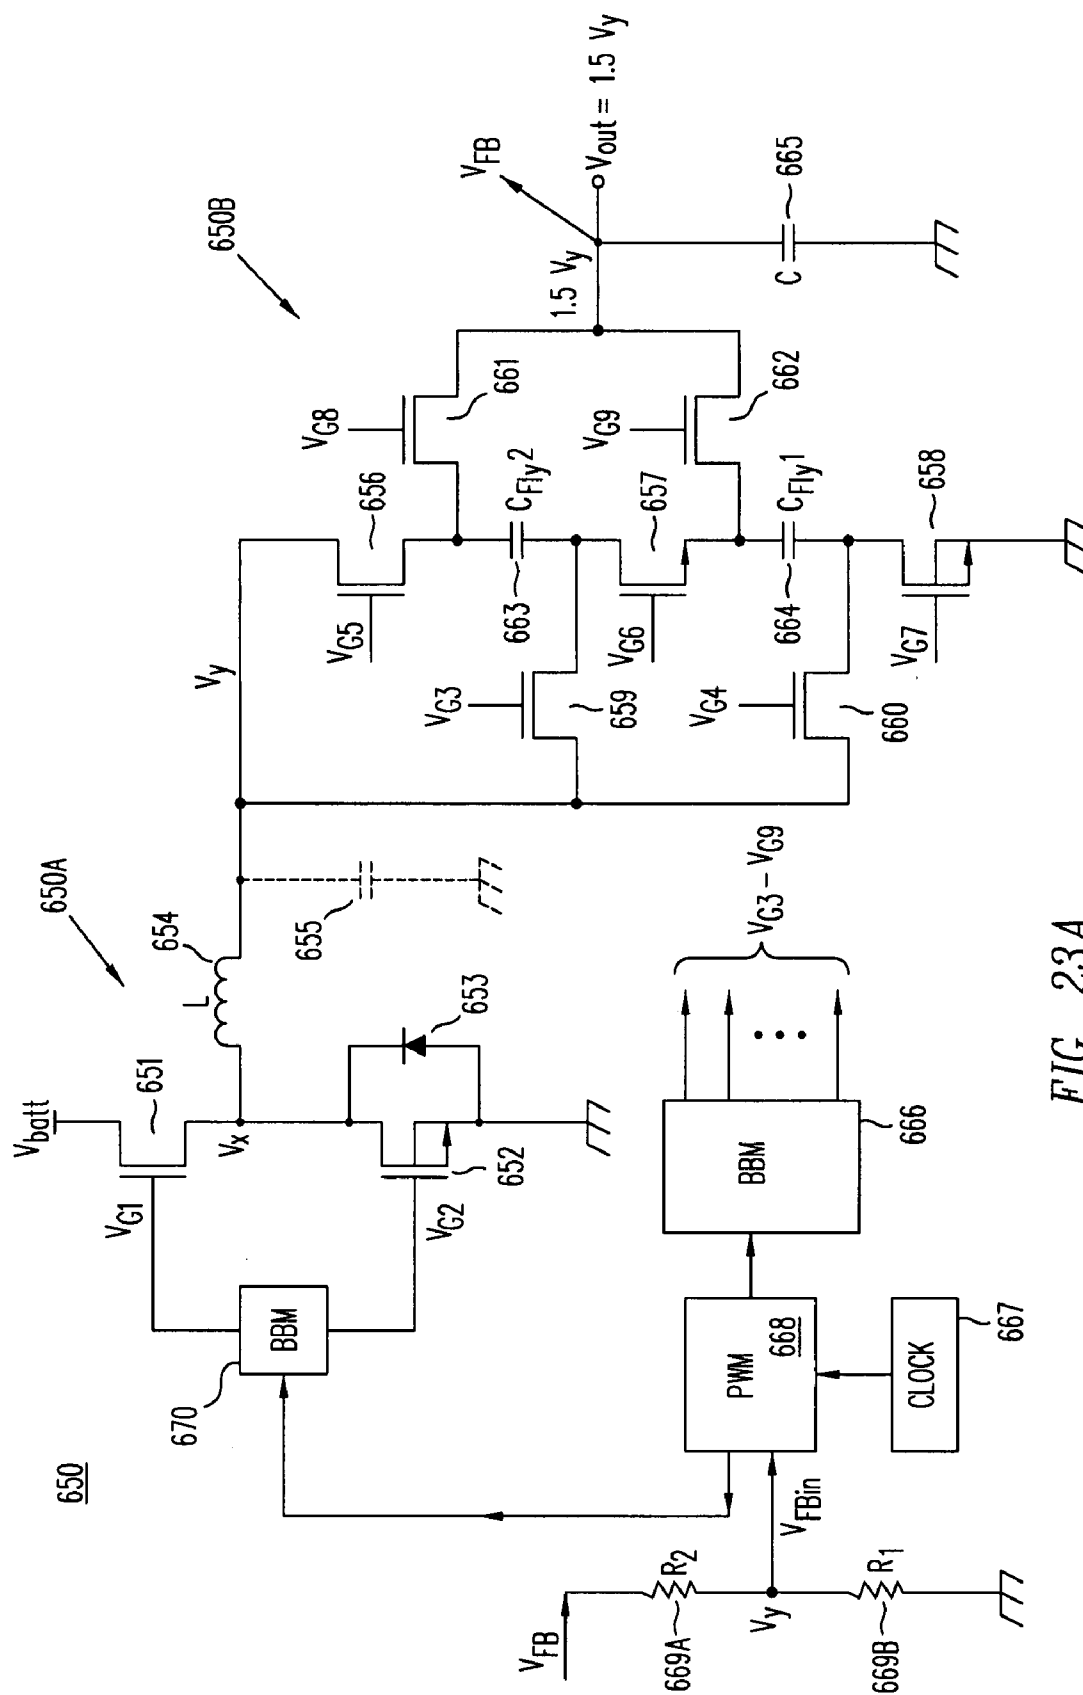


FIG. 23A

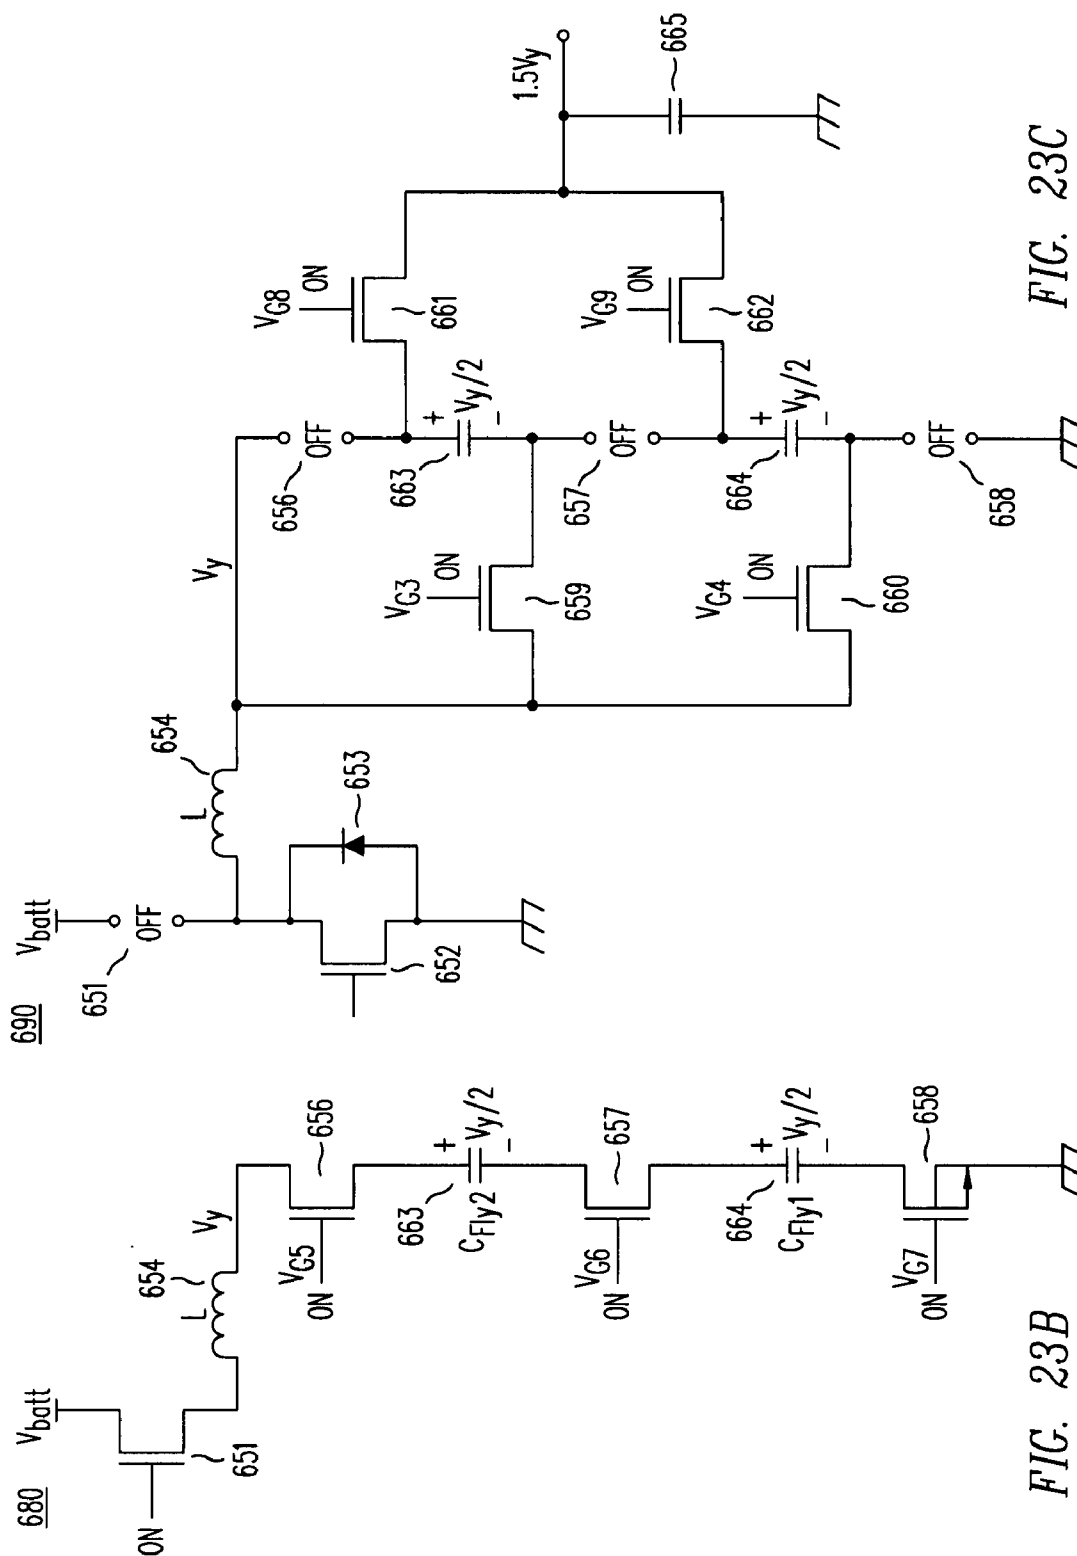


FIG. 23C

FIG. 23B

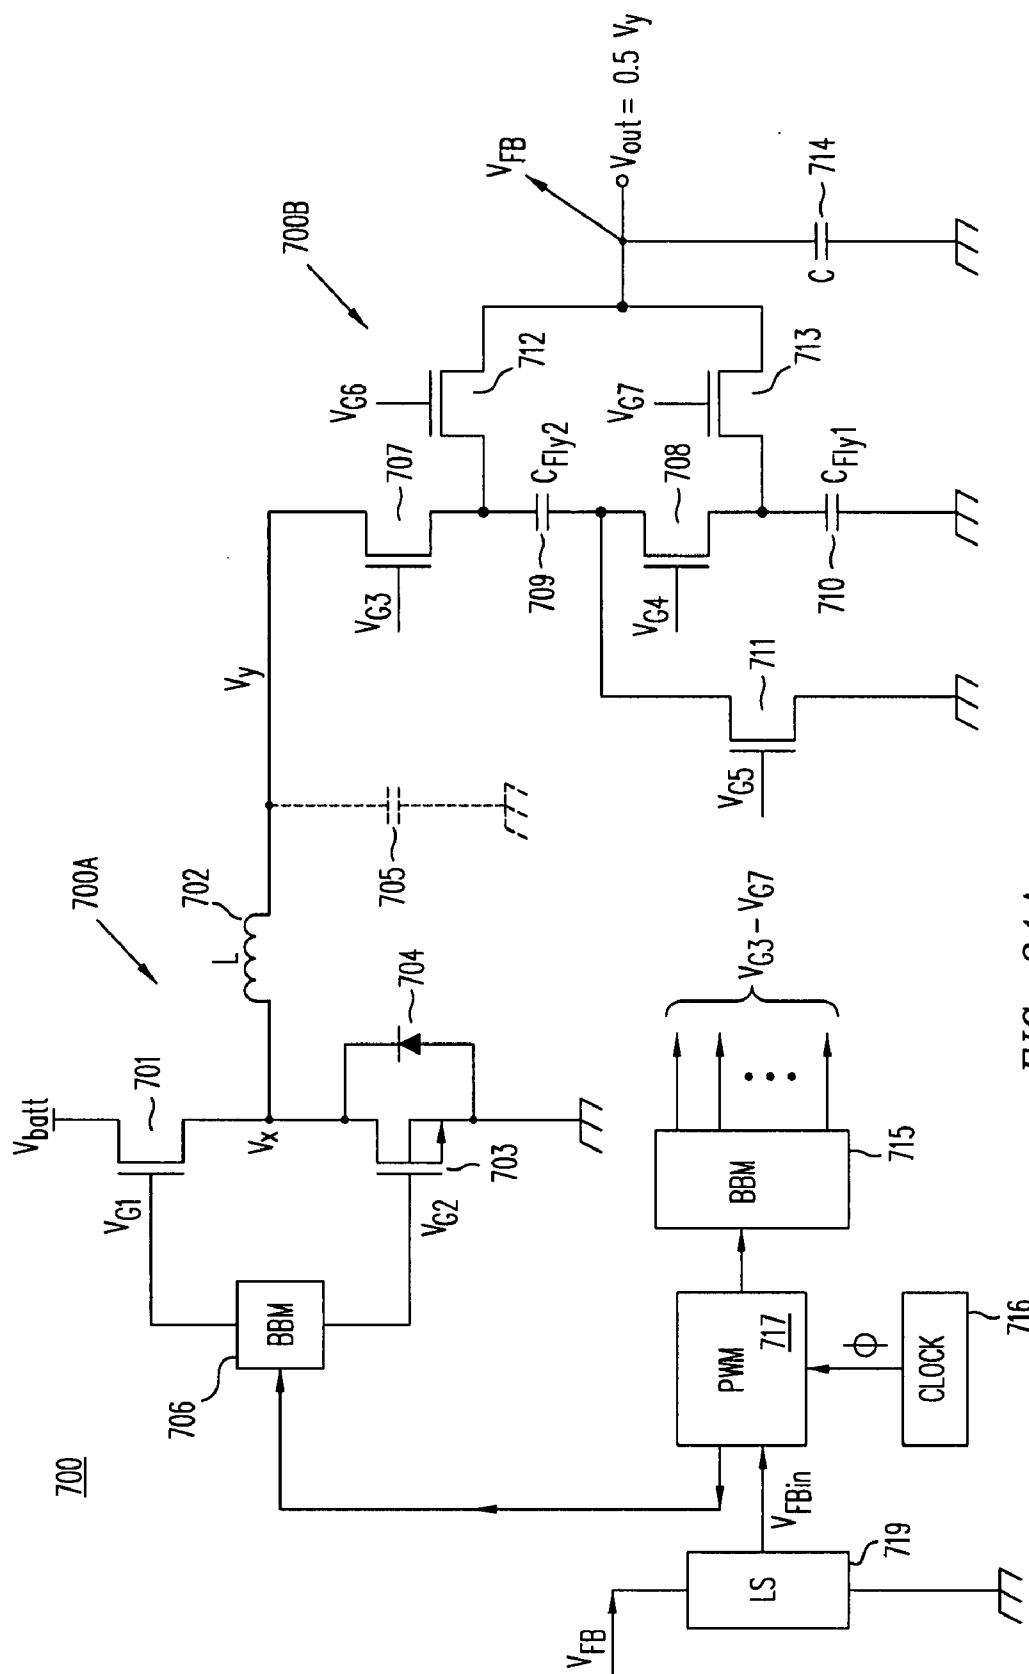


FIG. 24A

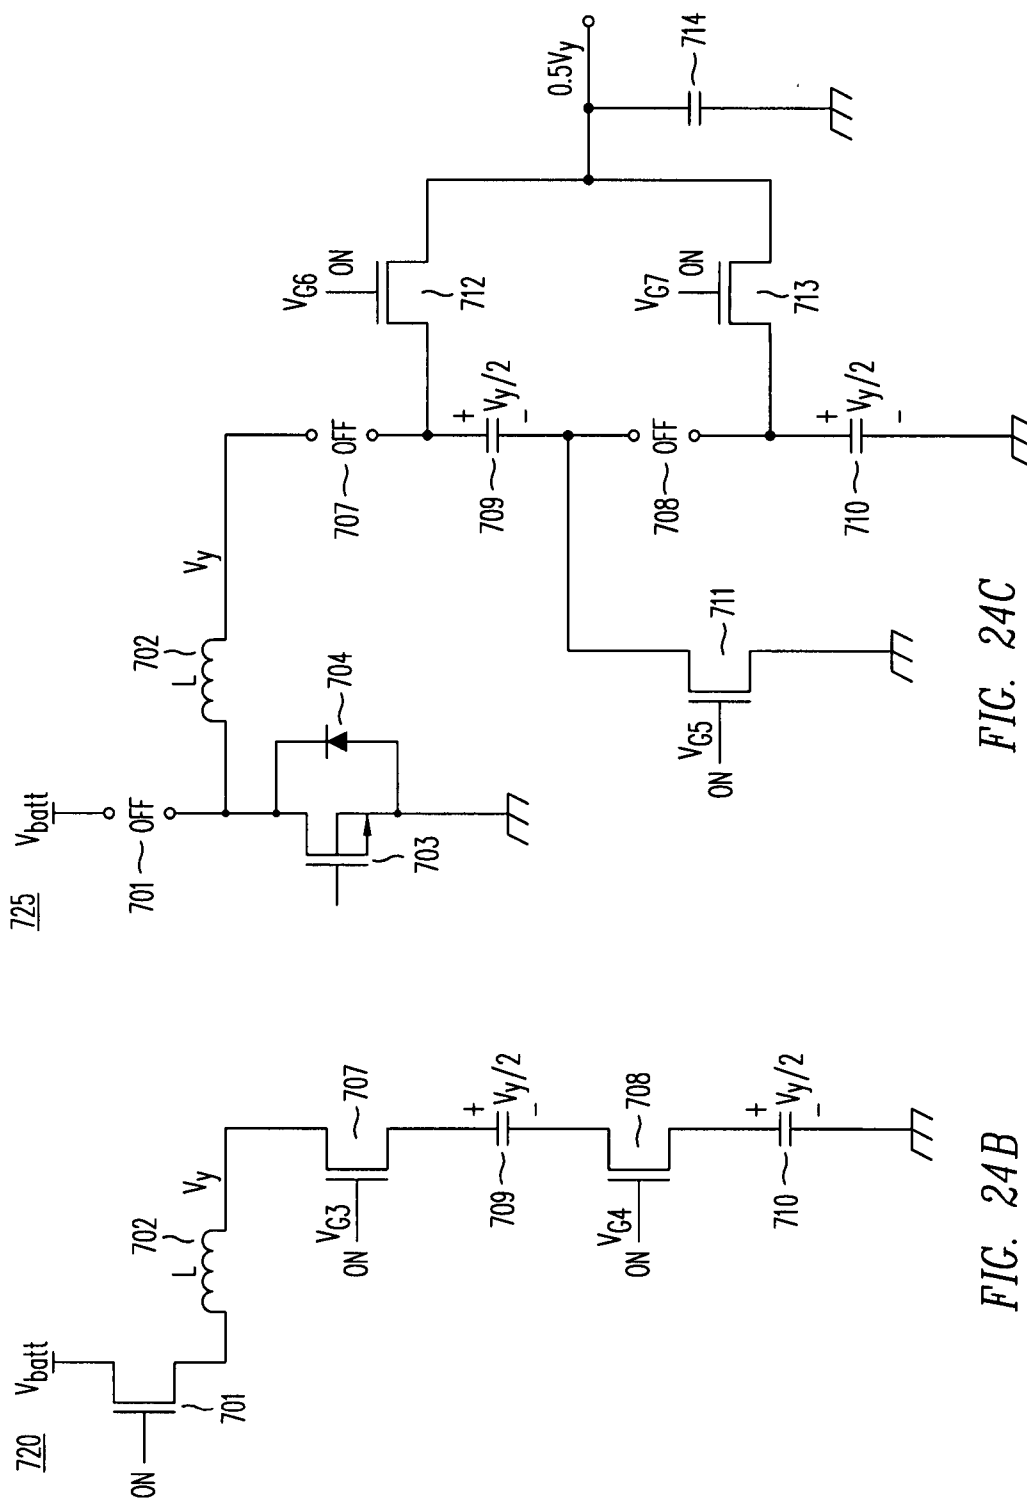


FIG. 24C

FIG. 24B

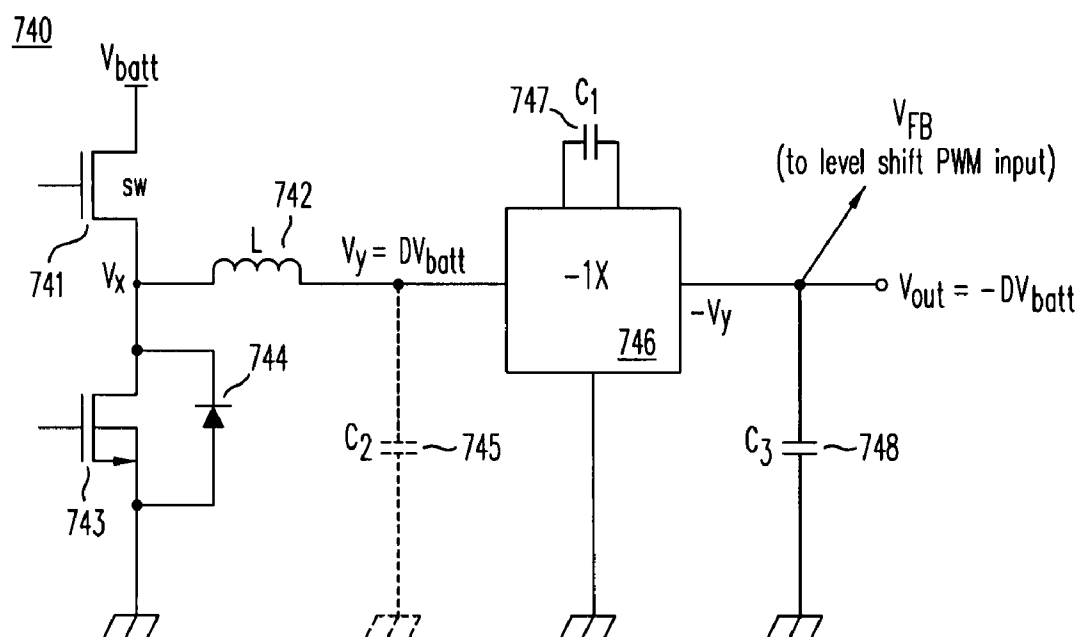


FIG. 25A

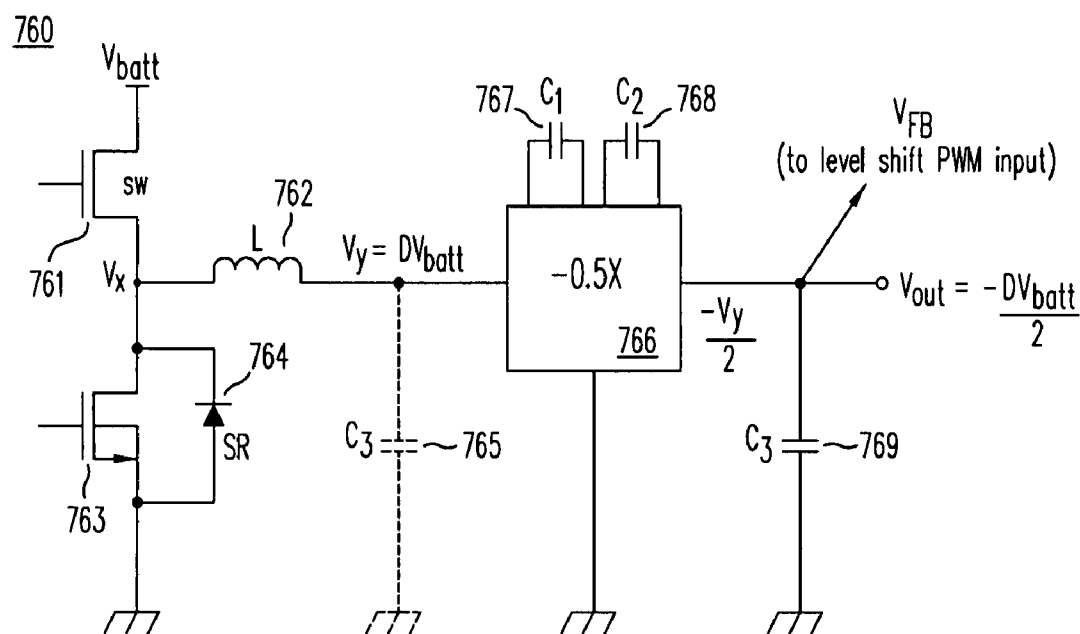


FIG. 25B

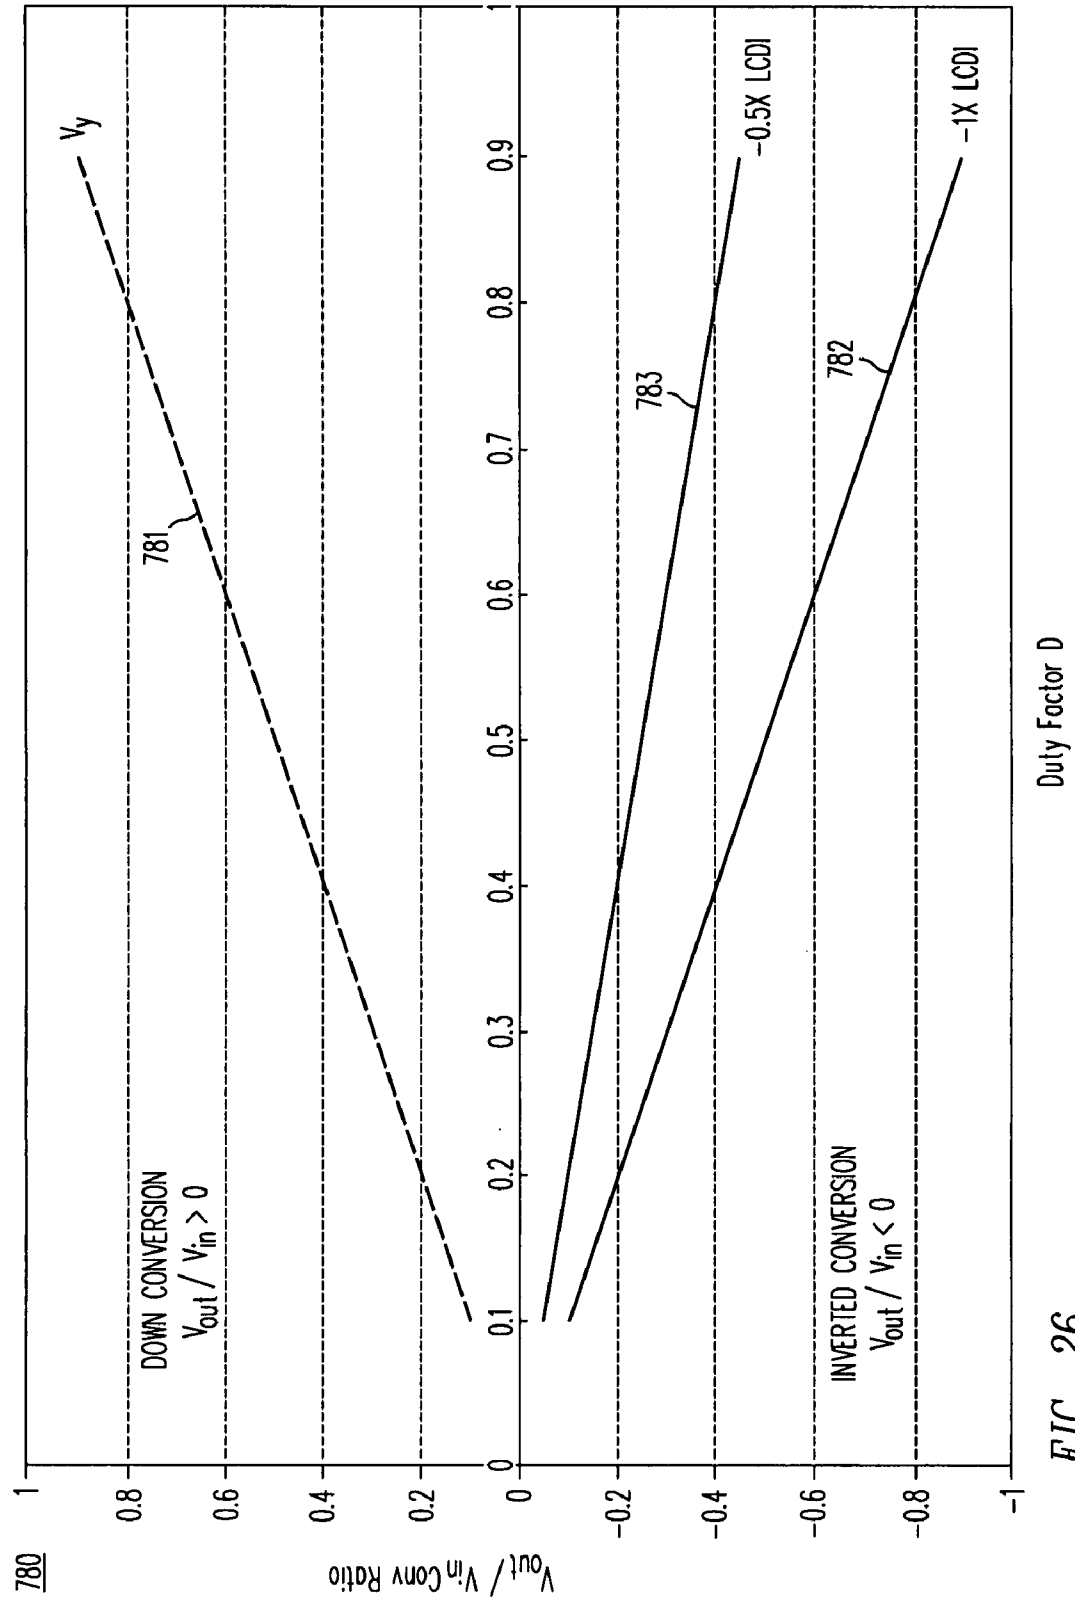


FIG. 26

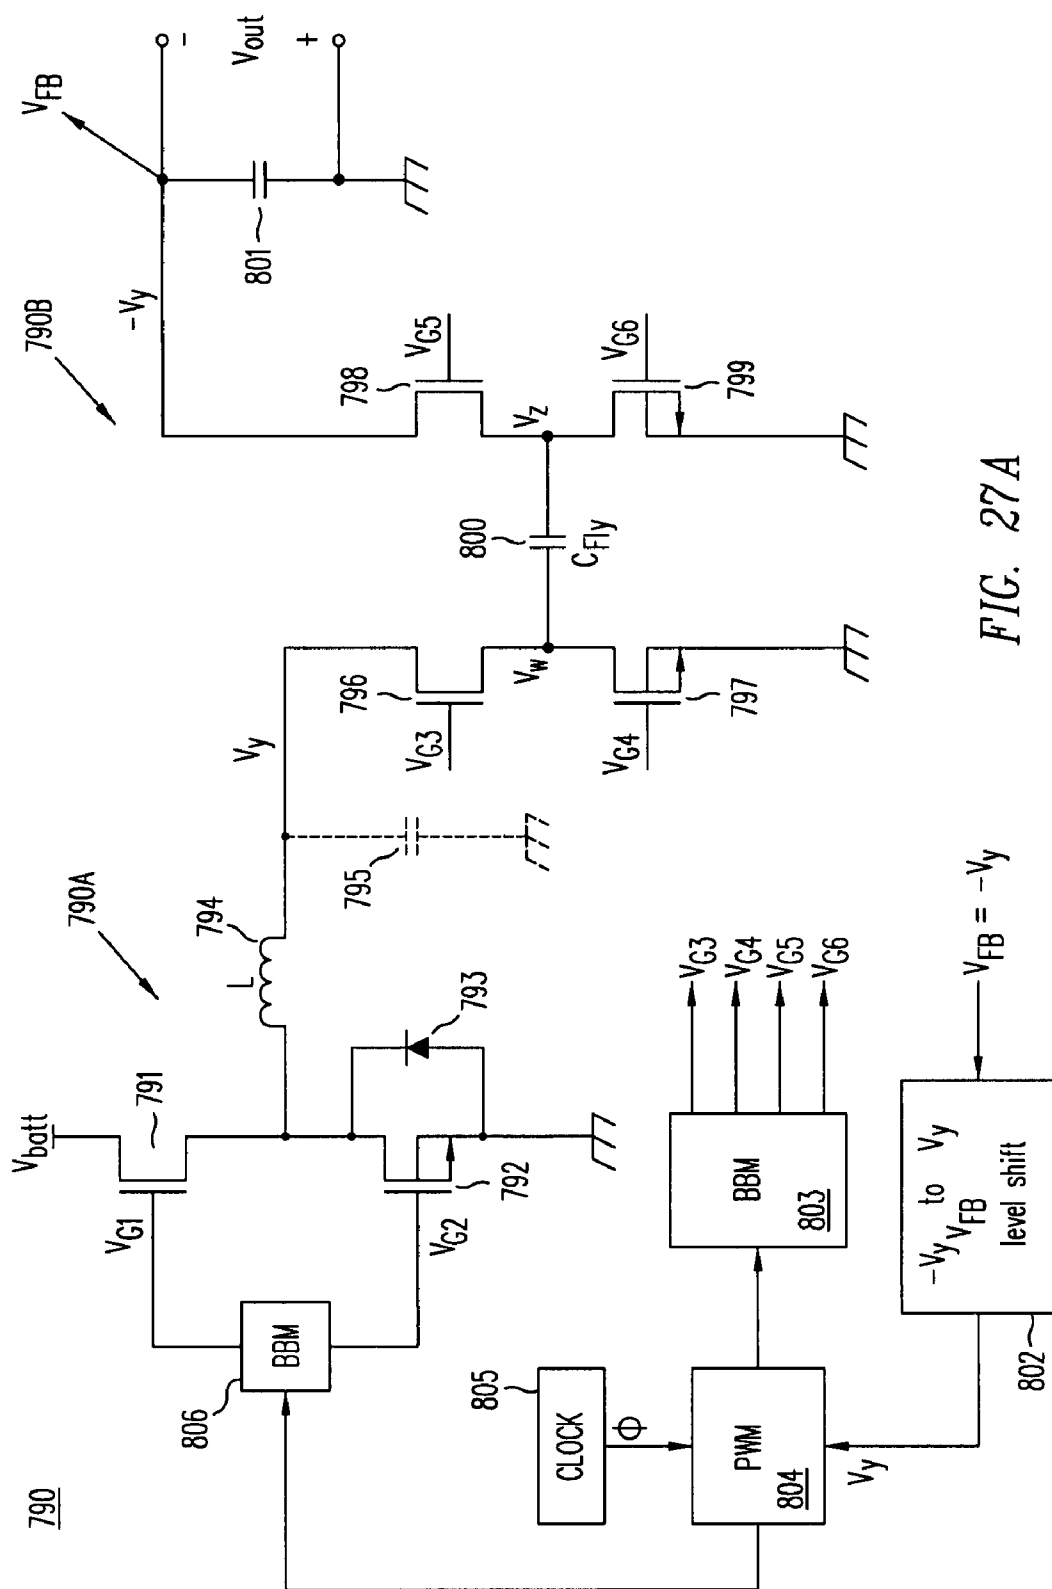


FIG. 27A

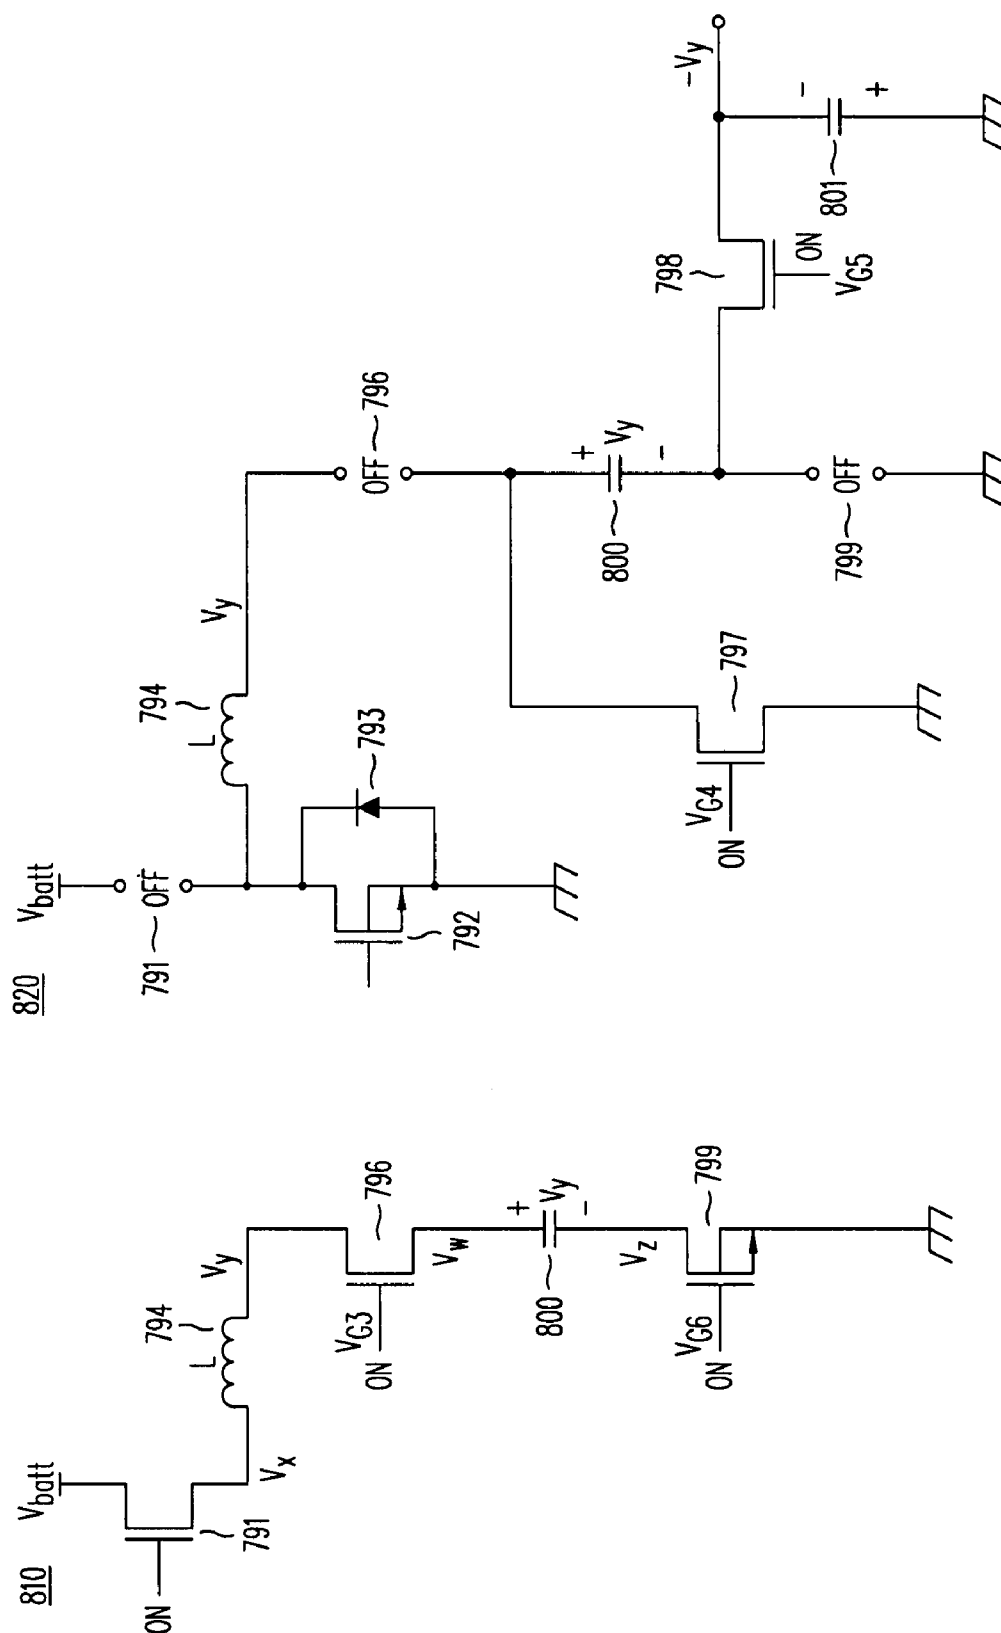


FIG. 27C

FIG. 27B

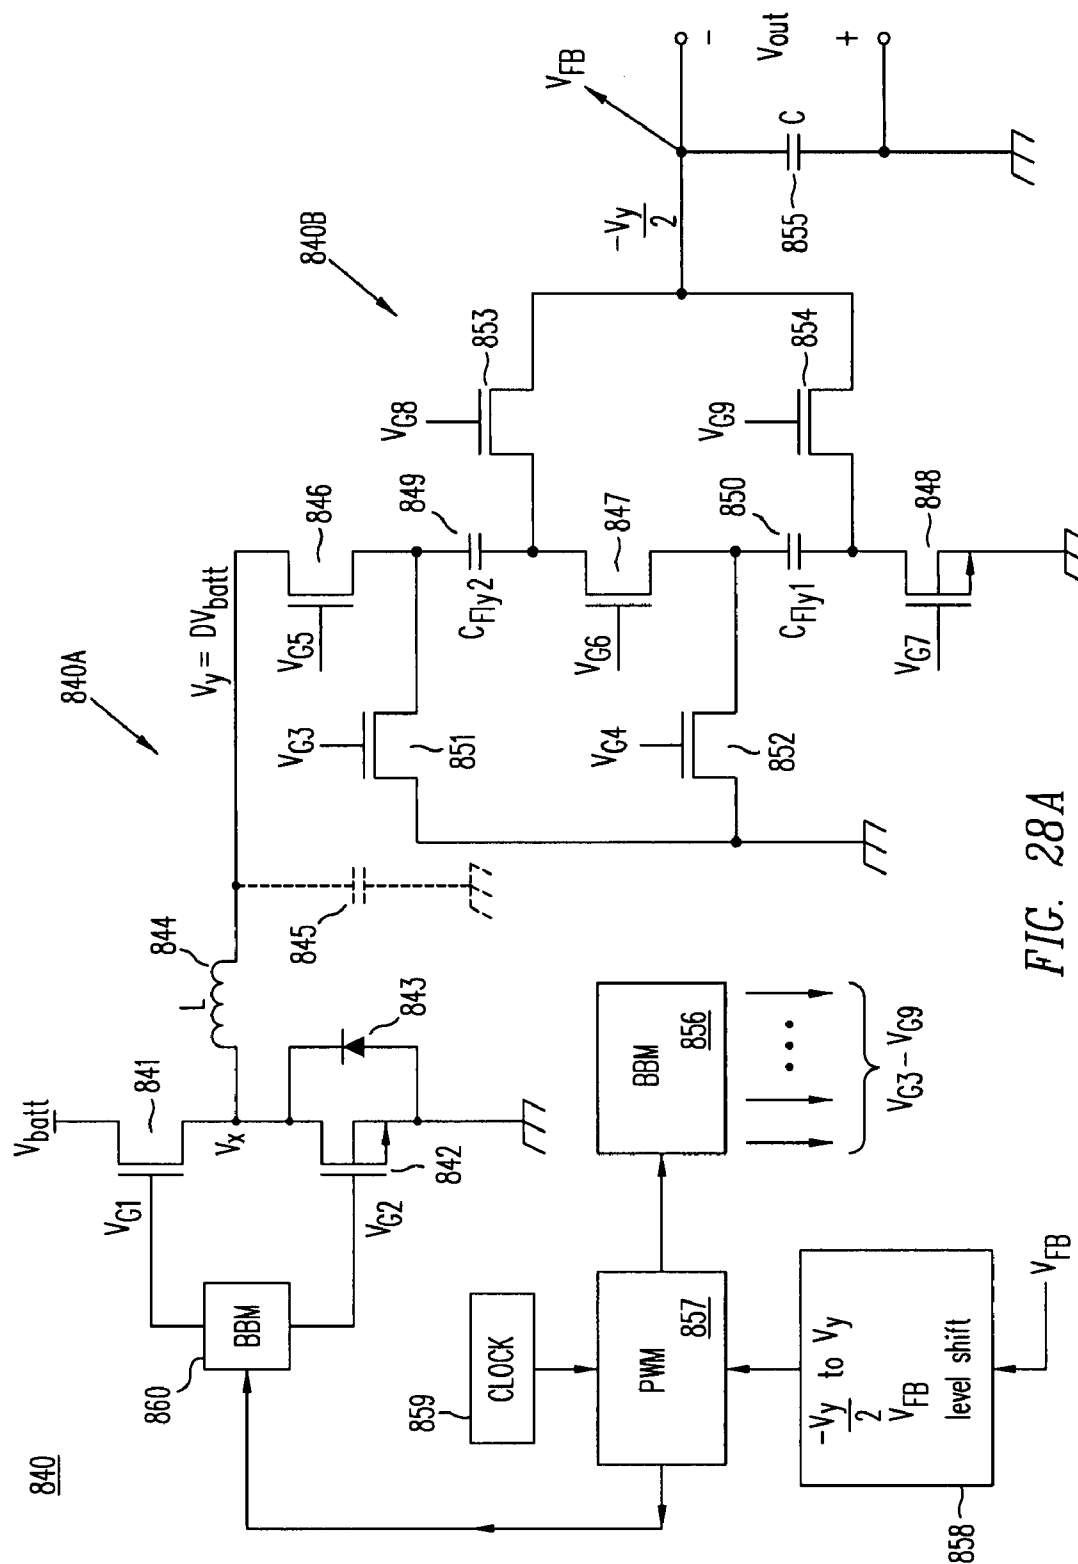


FIG. 28A

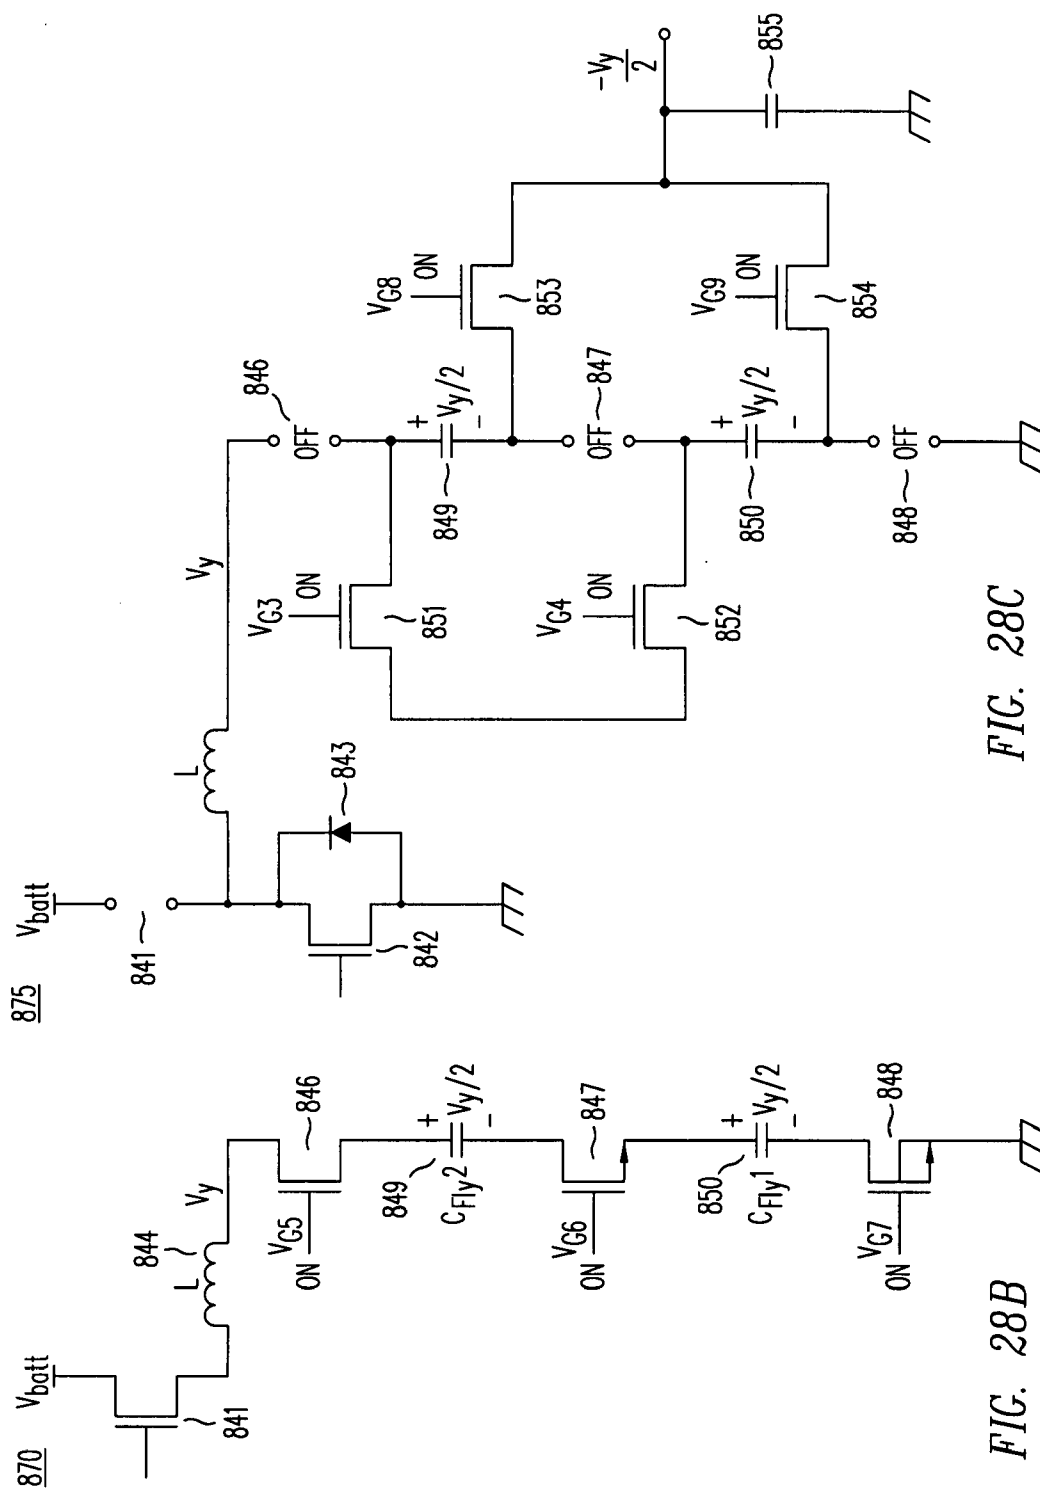


FIG. 28C

FIG. 28B

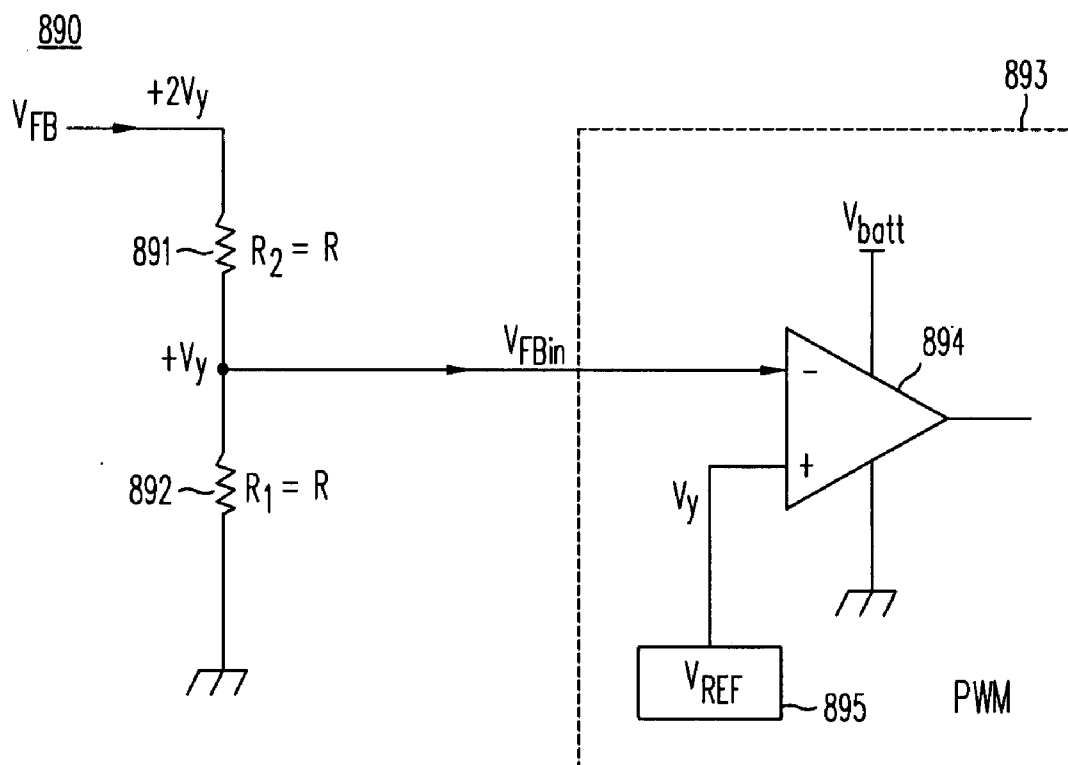


FIG. 29A

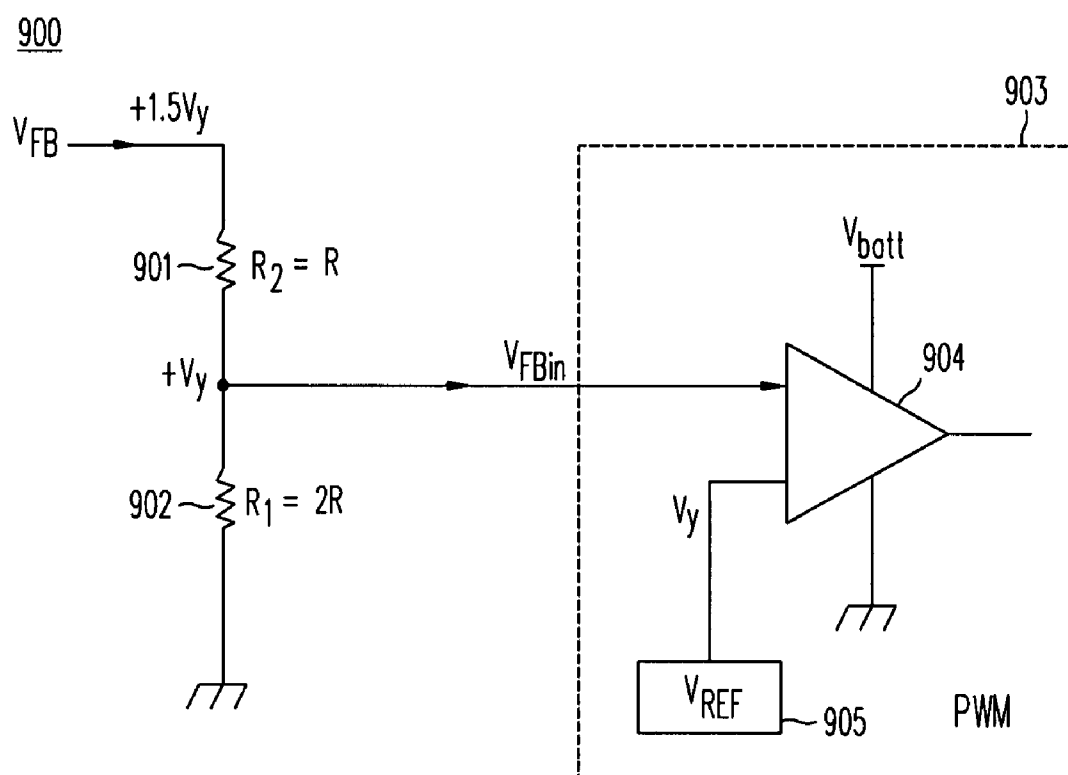


FIG. 29B

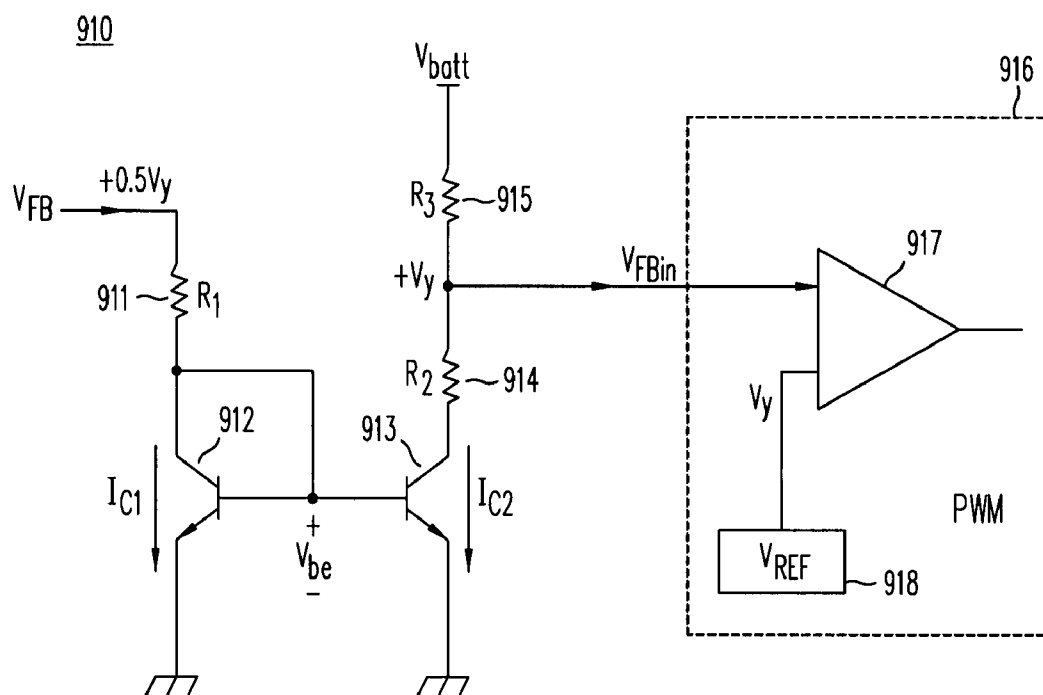


FIG. 29C

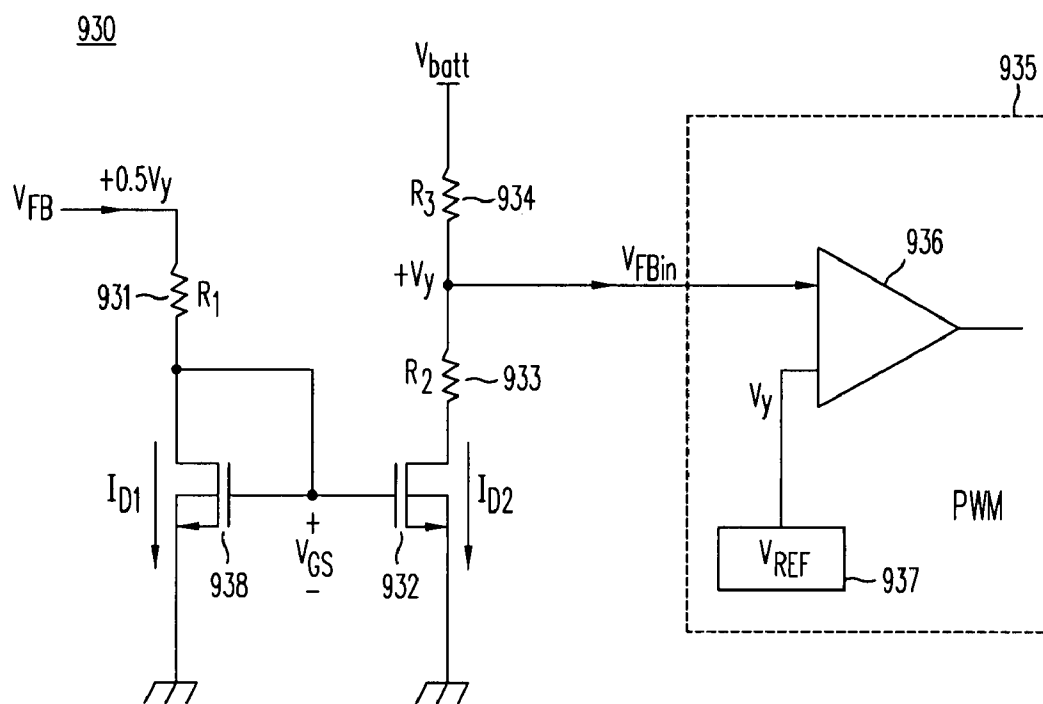


FIG. 29D

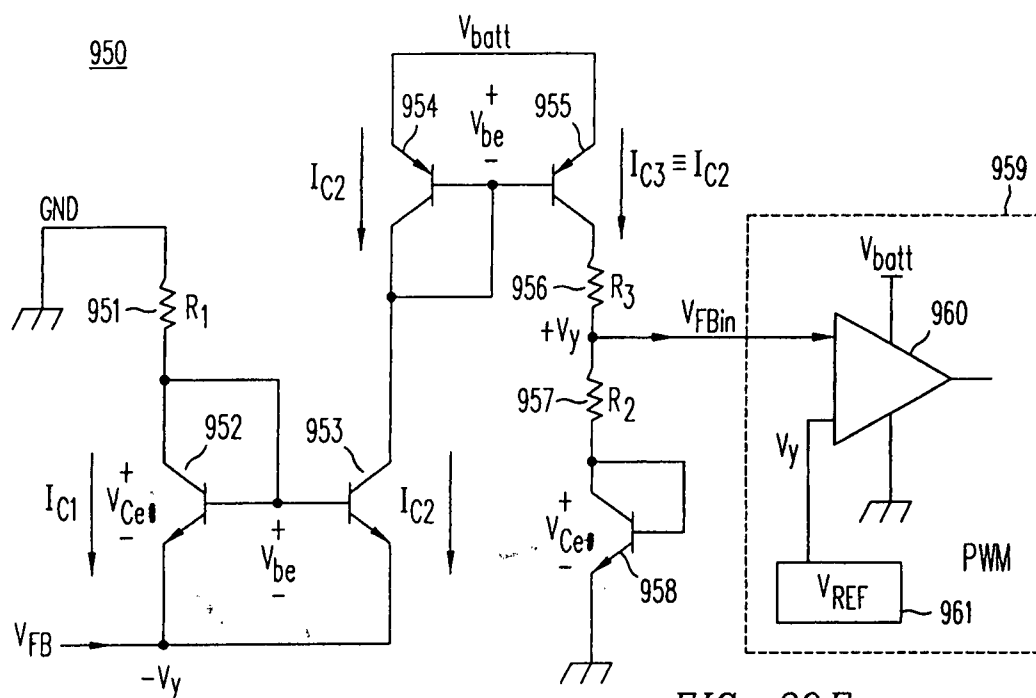


FIG. 29E

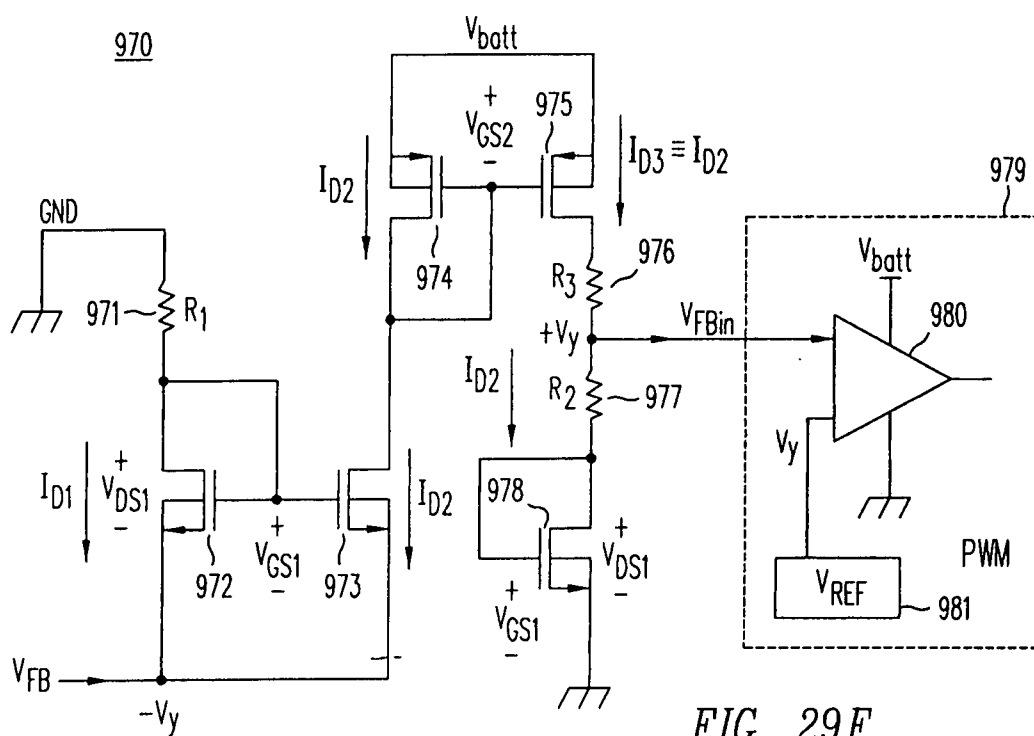
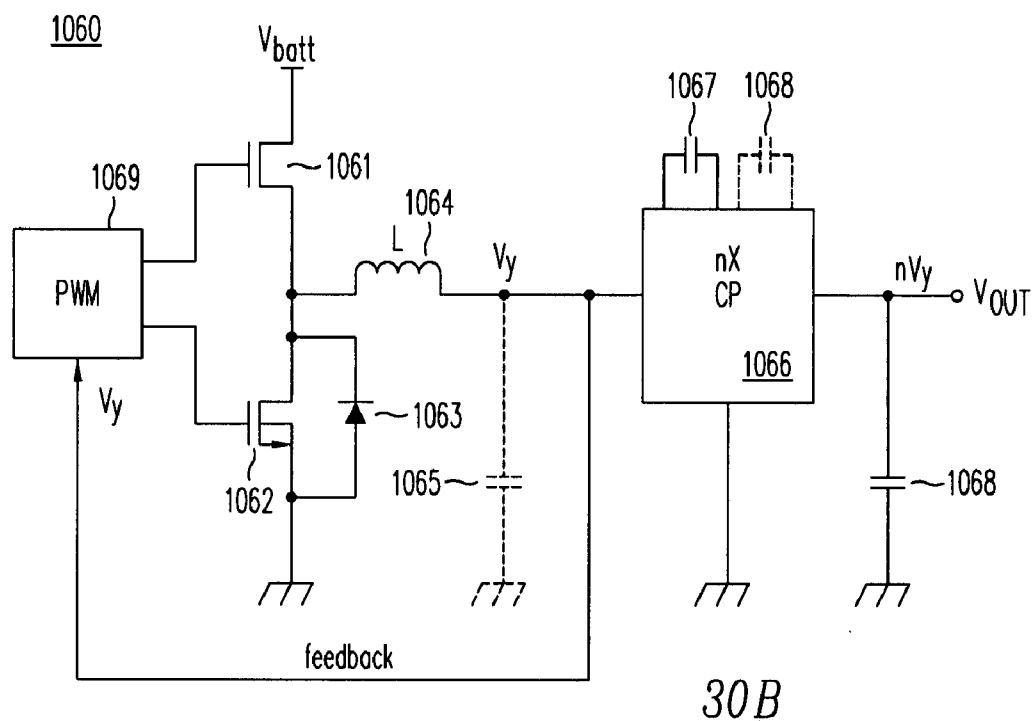
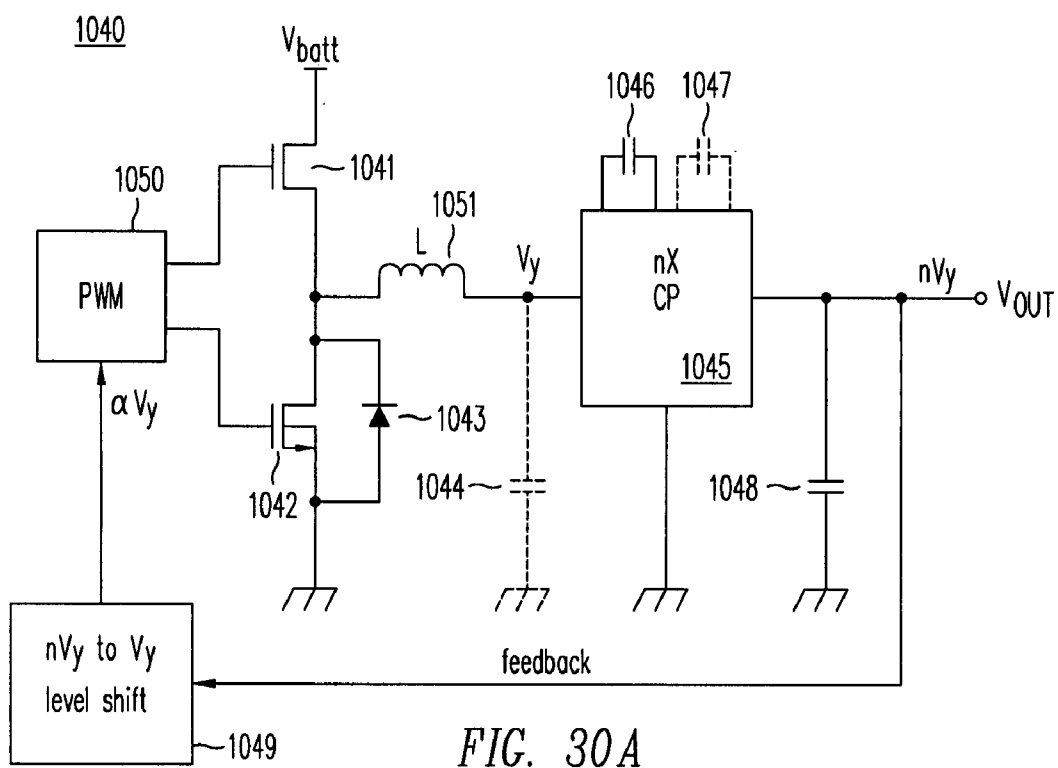


FIG. 29F



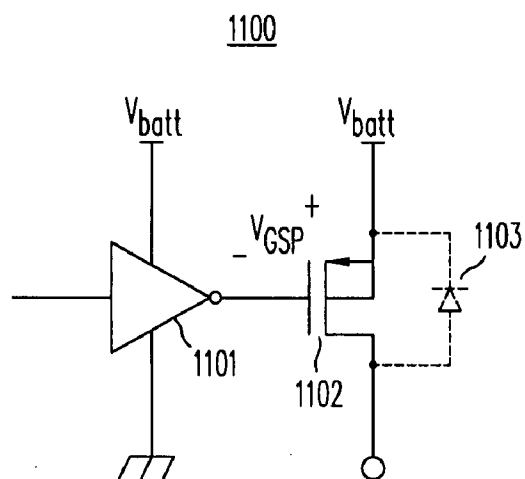


FIG. 31A

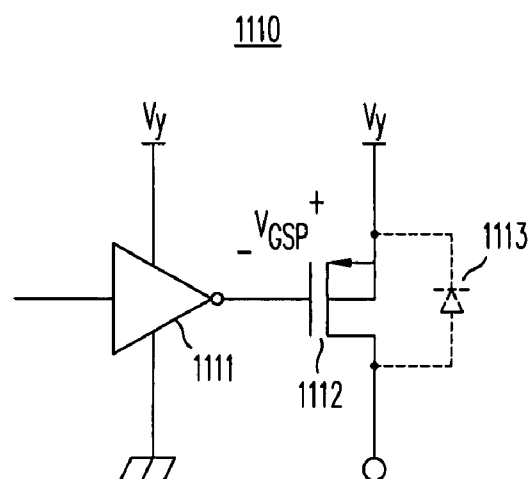


FIG. 31B

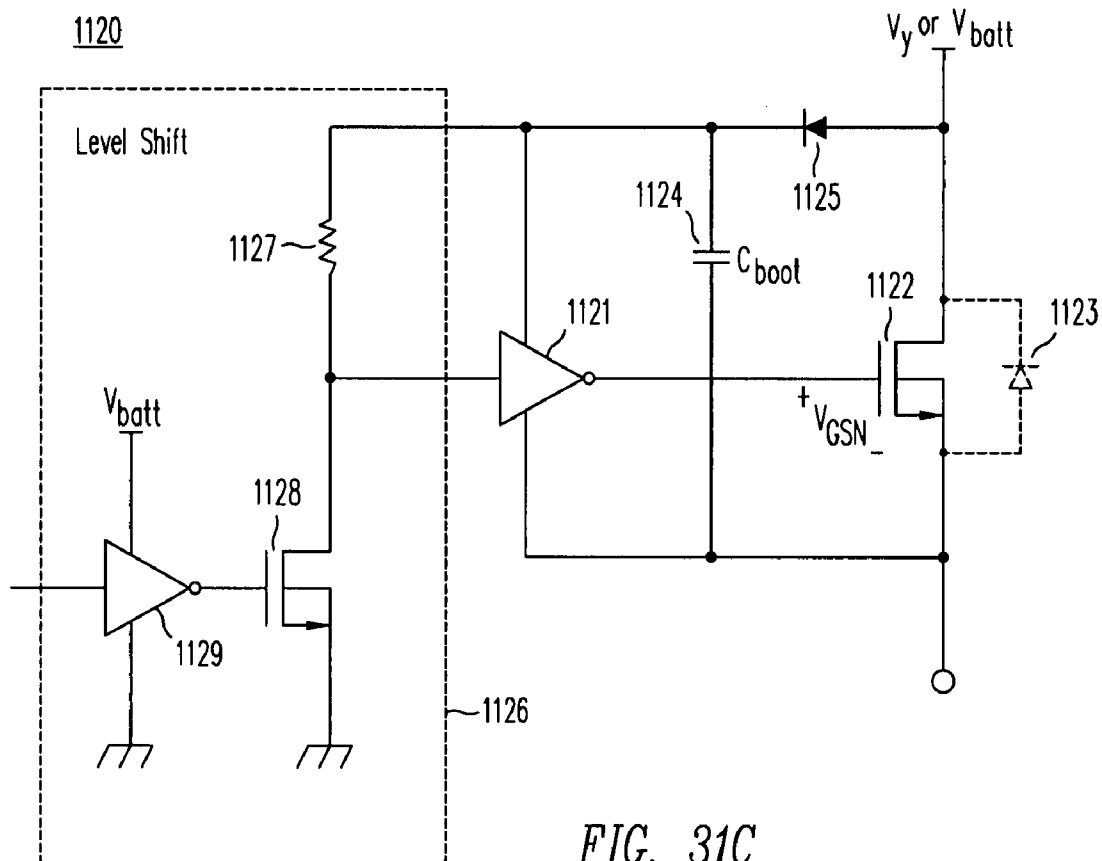


FIG. 31C

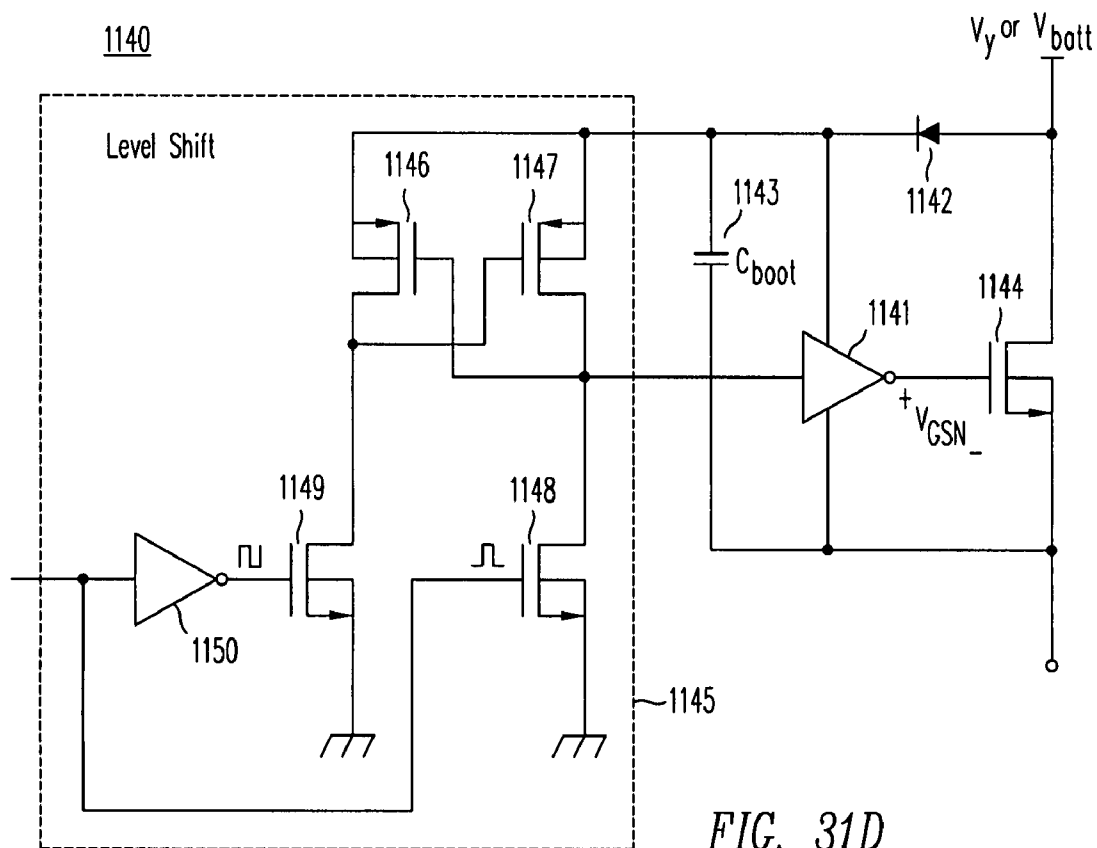


FIG. 31D

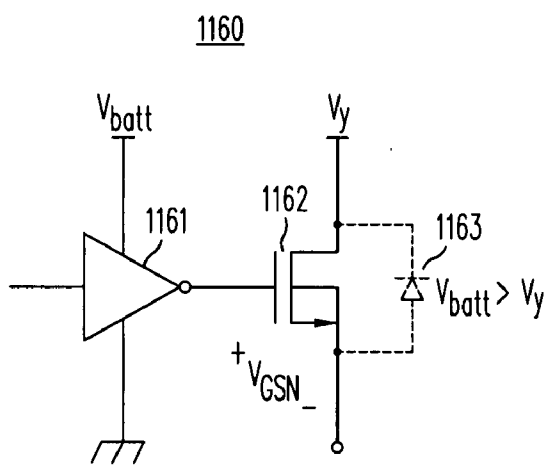


FIG. 31E

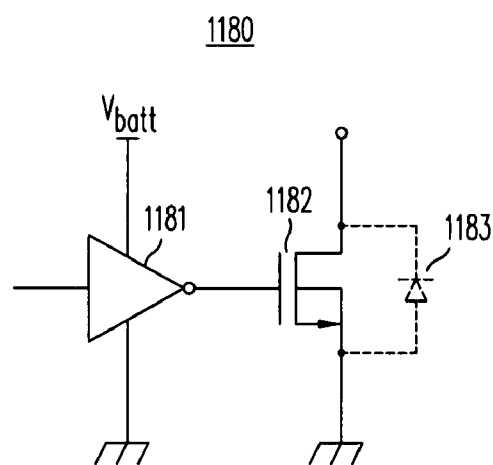


FIG. 31F

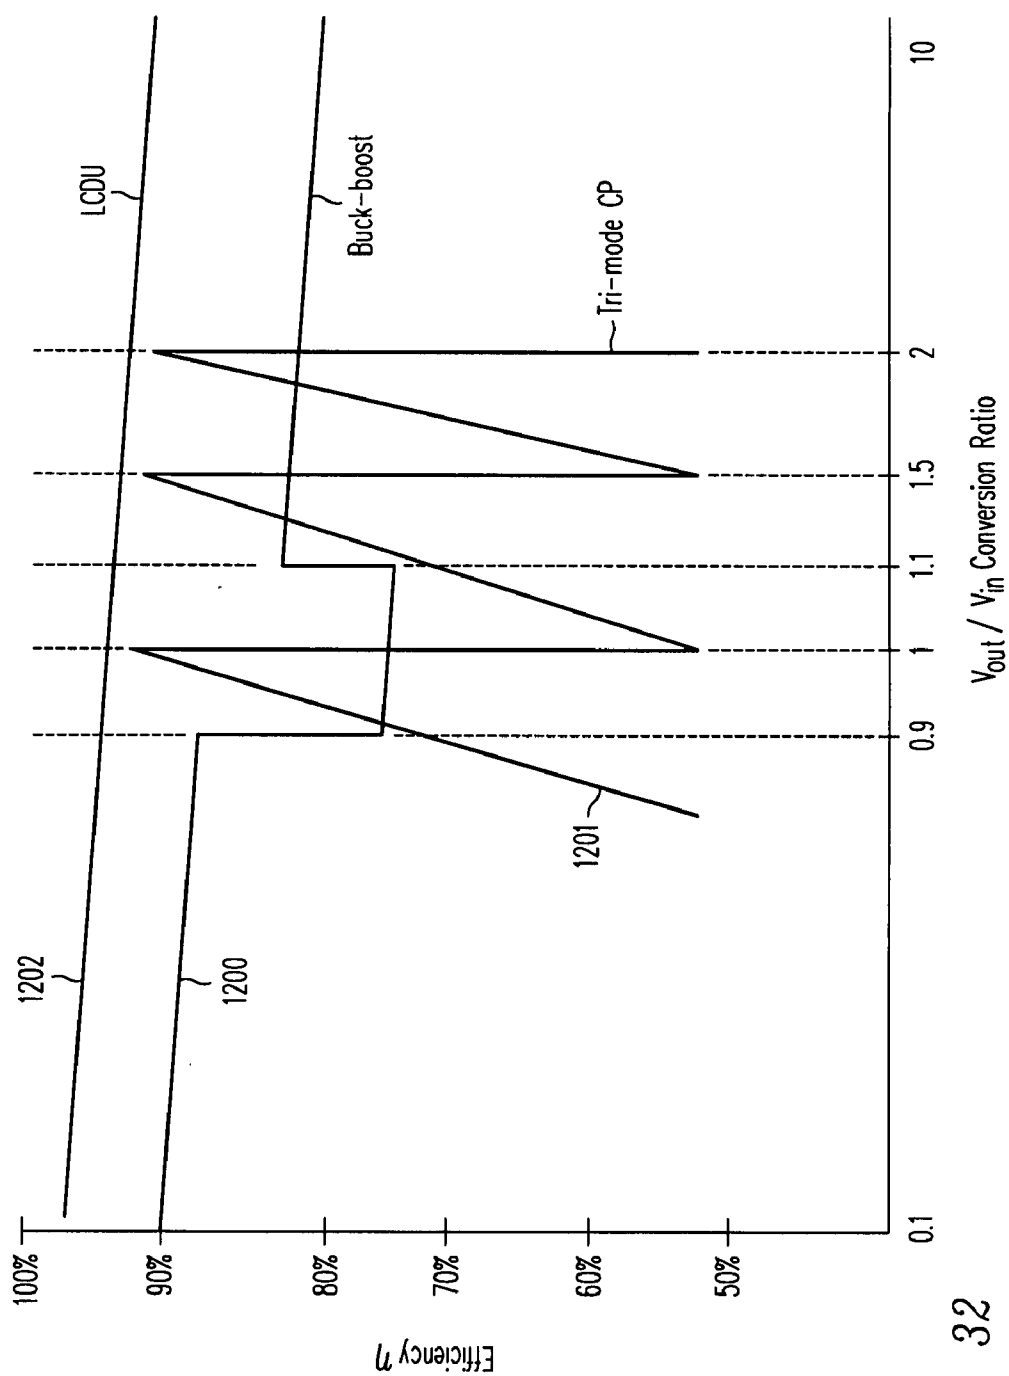


FIG. 32

HIGH-EFFICIENCY DC/DC VOLTAGE CONVERTER INCLUDING DOWN INDUCTIVE SWITCHING PRE-REGULATOR AND CAPACITIVE SWITCHING POST-CONVERTER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the priority of Provisional Applications Nos. 60/877,952 and 60/877,720, both titled “High-Efficiency Down-Up And Related DC/DC Converters” and filed on Dec. 30, 2006, each of which is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

[0002] This invention pertains to the design, operation and performance of switching power supplies for use in DC/DC conversion and voltage regulation, and to the semiconductor components used in such converters.

BACKGROUND OF THE INVENTION

[0003] Voltage regulation is commonly required to prevent variation in the supply voltage powering various microelectronic components such as digital ICs, semiconductor memories, display modules, hard disk drives, RF circuitry, microprocessors, digital signal processors and analog ICs, especially in battery-powered applications such as cell phones, notebook computers and consumer products.

[0004] Since the battery or DC input voltage of a product often must be stepped-up to a higher DC voltage, or stepped-down to a lower DC voltage, such regulators are referred to as DC-to-DC converters. Step-down converters, commonly referred to as “Buck converters,” are used whenever a battery’s voltage is greater than the desired load voltage. Step-down converters may comprise inductive switching regulators, capacitive charge pumps, and linear regulators. Conversely, step-up converters, commonly referred to as “boost converters,” are needed whenever a battery’s voltage is lower than the voltage needed to power its load. Step-up converters may comprise inductive switching regulators or capacitive charge pumps.

[0005] Another type of converter may operate as either a step-up or a step-down converter depending on whether the power input to the converter has a voltage above or below its output voltage. Commonly referred to Buck-boost converters, such circuitry is needed whenever a regulator’s input and output are similar in voltage, where variations in the input voltage preclude the use of a simple boost or Buck converter.

[0006] One example of such an application requiring both step-up and step-down conversion is supplying a regulated 3.3V output from a lithium ion (Lilon) battery. A Lilon battery exhibits a terminal voltage which decays from 4.2V when fully charged to below 3V when discharged. Since the initial battery voltage is above 3.3V and the final battery voltage is below 3.3V, the converter must be able to step-down initially and step-up later.

Inductive Switching Converters

[0007] Of the aforementioned voltage regulators, the inductive switching converter can achieve superior performance over the widest range of currents, input voltages and output voltages. The fundamental principal of a DC/DC inductive switching converter is that the current in an inductor

(coil or transformer) cannot be changed instantly and that an inductor will produce an opposing voltage to resist any change in its current.

[0008] By using one or more transistors switching at a high frequency to repeatedly magnetize and de-magnetize an inductor, the inductor can be used to step-up or step-down the converter’s input, producing an output voltage different from its input. The transistors are typically implemented using MOSFETs with a low on-state resistance, commonly referred to as “power MOSFETs”. Using feedback from the converter’s output voltage to control the switching conditions, a constant well-regulated output voltage can be maintained despite rapid changes in the converter’s input voltage or its output current.

[0009] To remove any AC noise or ripple generated by switching action of the transistors, an output capacitor is placed across the output of the switching regulator circuit. Together the inductor and the output capacitor form a “low-pass” filter able to remove the majority of the transistors’ switching noise from reaching the load. The switching frequency, typically 1 MHz or more, must be “high” relative to the resonant frequency of the filter’s “LC” tank. Averaged across multiple switching cycles, the switched-inductor behaves like a programmable current source with a slow-changing average current.

[0010] Since the average inductor current is controlled by transistors that are biased either as “on” or “off” switches, the power dissipation in the transistors is theoretically small and high converter efficiencies, in the 80% to 90% range, can be realized. Specifically, when an enhancement mode power MOSFET is biased as an on-state switch using a “high” gate bias, it exhibits a linear I-V drain characteristic with a low $R_{DS(on)}$ resistance typically 200 milliohms or less. At a current of 0.5 A for example, such a device will exhibit a maximum voltage drop $I_D \cdot R_{DS(on)}$ of only 100 mV despite its high drain current. Its power dissipation during its on-state conduction time is $I_D^2 \cdot R_{DS(on)}$. In the example given the power dissipation during the transistor’s conduction is $(0.5 \text{ A})^2 \cdot (0.2\Omega) = 50 \text{ mW}$.

[0011] In its off state, an enhancement mode power MOSFET has its gate biased to its source, i.e. so that $V_{GS} = 0$. Even with an applied drain voltage V_{DS} equal to a converter’s battery input voltage V_{batt} , a power MOSFET’s drain current I_{DSS} is very small, typically well below one microampere and more generally nanoamperes. The current I_{DSS} is primarily due to junction leakage.

[0012] So a power MOSFET used as a switch in a DC/DC converter is efficient, since in its off condition it exhibits low currents at high voltages, and in its on state it exhibits high currents at a low voltage drop. Excepting switching transients, the $I_D \cdot V_{DS}$ product in the power MOSFET remains small, and power dissipation in the switch remains low.

[0013] Provided that the transistor switching events (i.e., the time it takes to switch the MOSFET from off to on, and vice-versa) are relatively short compared to the period between switching events, the power loss during switching can in circuit analysis be considered negligible or alternatively treated as a fixed power loss. At multi-megahertz switching frequencies, however, the switching waveform

analysis becomes more significant and must be considered by analyzing a device's drain voltage, drain current, and gate bias voltage versus time.

Minimizing Power Loss in Switching Converters

[0014] In step-up, step-down or up-down DC-to-DC switching converters, one or more power switch elements are required to control the current and energy flow in the converter circuitry. During operation, these power devices act as power switches, toggling on and off at high frequencies and with varying frequency or duration.

[0015] During such operation, these power devices lose energy to self heating, both during periods of on-state conduction and during the act of switching. These switching and conduction losses adversely limit the power converter's efficiency. The efficiency of a converter therefore depends on minimizing the $I_{on} \cdot V_{on}$ conduction loss in every conducting switch or rectifier diode, and in minimizing the gate drive current need to charge the switch's input capacitance at the desired frequency, also known as $C_G \cdot V_G^2$ losses.

[0016] Other losses include power dissipated during the switching transition, i.e. cross-over conduction, when both voltage and current are simultaneously present, and at higher voltages, output power lost charging and discharging a MOSFET's drain capacitance, as given by the loss for each device, namely

$$P_{loss} = P_{conduction} + P_{drive} + P_{crossover} + P_{drain}$$

[0017] For fast switching transistors operating at low voltages, however, these additional losses are small compared to the gate drive and conduction losses in the converter. As such, the power loss in one switch can be reduced by minimizing the sum of its conduction loss and the gate drive loss, where

$$P_{loss} \approx P_{conduction} + P_{drive}$$

[0018] For a power MOSFET this relationship can be approximated by the equation

$$P_{loss} \approx I^2 R_{DS} \left(\frac{t_{sw}}{T} \right) + I \cdot V_f \left(\frac{t_{rect}}{T} \right) + Q_G V_G f$$

[0019] In this equation $I^2 R_{DS}$ represents the conduction loss in a power MOSFET and the ratio (t_{sw}/T) represents the portion of the time the MOSFET is switched fully on and conducting current. The conduction loss term $I \cdot V_f$ represents power dissipated in a diode having a forward voltage V_f , and (t_{rect}/T) represents the fraction of time in a period T the diode is conducting current. The term $Q_G \cdot V_G \cdot f$ describes the aforementioned $C_G \cdot V_G^2$ gate drive loss described in terms of gate charge Q_G . Gate charge Q_G is preferred over capacitance C_G since the capacitance is highly non-linear and difficult to model accurately. Moreover, using gate charge Q_G offers greater accuracy in predicting efficiency since in nature charge is always conserved, but capacitance is not.

[0020] From the above equation minimizing the power loss in the MOSFET requires minimizing R_{DS} by making the MOSFET larger while minimizing gate drive loss requires minimizing Q_G . Unfortunately gate charge and capacitance are proportional to a transistor's active area A and inversely proportional to its on-resistance, i.e.

$$Q_G \propto A \propto \frac{1}{R_{DS}}$$

[0021] This relation clarifies an unavoidable tradeoff that exists between gate drive and resistive channel conduction losses in a power MOSFET used as a switching converter. Bigger MOSFETs exhibit lower on-resistance and less conductive loss but are harder to drive, losing efficiency especially at higher switching frequencies f .

[0022] To maximize a converter's overall efficiency, one must not only use MOSFETs with lowest possible resistance and the minimum gate input capacitance, but must also employ a minimal number of switching elements, with each MOSFET optimized in size for its nominal operating current and switching frequency.

[0023] Non-isolated converter topologies like synchronous Buck and synchronous boost converters exhibit high efficiencies because they employ only two MOSFET switches. Unfortunately, up-down converters typically require four switches and suffer in efficiency as a result. While transformers or coupled inductors may be used to achieve up-down regulator operation and avoid the need for more switches, in non-isolated converter applications, multi-winding inductors are unacceptably large compared to single-winding coils.

Non-Isolated Switching Converter Topologies

[0024] FIGS. 1A and 1B illustrate two common switching regulators, a synchronous Buck step-down converter and a synchronous boost step-up converter.

[0025] An example of a synchronous Buck converter 1 is shown in FIG. 1A. Converter 1 comprises a power MOSFET 3, an inductor 4, a synchronous rectifier power MOSFET 2, with an intrinsic rectifier diode 7, and a capacitor 5. Operation of MOSFET 3 is controlled by a pulse-width modulation (PWM) control circuit (not shown), driving the gate of MOSFET 3. Synchronous rectifier MOSFET 2 is driven out of phase with MOSFET 3, but MOSFET 2 is not necessarily on the entire time when MOSFET 3 is off.

[0026] While the control circuit controlling the converter's operation is referred to as PWM control implying fixed-frequency variable-pulse-width operation, it may alternatively operate in a variable frequency mode where the clock period is allowed to vary, or alternatively alternating between varying and fixed frequency modes depending on load and input conditions.

[0027] The energy input from the power source, battery or power input into the DC/DC converter is switched or gated through MOSFET 3. With its positive terminal connected to the battery or input, MOSFET 3 acts like a "high-side" switch controlling the current in inductor 4. Diode 8 is a P-N junction parasitic to MOSFET 3, in parallel to the transistor's drain and source, which remains reverse-biased under normal Buck converter operation.

[0028] By controlling the current in the inductor 4 by controlling the switching and on-time of MOSFET 3, the energy stored in the magnetizing field of inductor 4 can be adjusted dynamically to control the voltage on output filter capacitor 5. The output voltage V_{out} is therefore fed back to the input of the PWM controller circuit, which controls the current I_L in

inductor 4 through the repeated switching of MOSFET 3. Load 6 represents an electrical load connected to the output of converter 1.

[0029] Driven out of phase with MOSFET 3, synchronous rectifier MOSFET 2 conducts some portion of the time when MOSFET 3 is off. With its positive terminal connected to the inductor 4, i.e. to node V_{in} , and its negative terminal connected to circuit ground, MOSFET 2 acts like a “low-side” switch, shunting the current flowing in diode 7. Diode 7 is a P-N junction parasitic to synchronous rectifier MOSFET 2, in parallel to the transistor’s drain and source. Diode 7 conducts substantial inductor current only during intervals when both MOSFETs 2 and 3 are off.

[0030] Both MOSFETs 2 and 3 are simultaneously off during every switching transition to prevent shorting the input power source to ground. This so-called “break-before-make” (BBM) interval prevents shoot through conduction by guaranteeing that both MOSFETs 2 and 3 do not conduct simultaneously and short or “crow-bar” the input and power source of converter 1. During this brief BBM interval, diode 7 in parallel to synchronous rectifier MOSFET 2 must, along with any parasitic capacitance associated with diode 7, carry the load current I_L through inductor 4. Unwanted noise can occur during the transitions associated with BBM operation.

[0031] If we define the converter’s duty factor D as the time that energy flows from the battery or other power source into the DC/DC converter, i.e. the time during which MOSFET switch 3 is on, then the ratio of output to input voltage in Buck converter 1 is proportionate to its duty factor, i.e.

$$\frac{V_{out}}{V_{in}} = D = \frac{t_{sw}}{T}$$

where t_{sw} is the time period that MOSFET 3 is turned on during each clock period T .

[0032] This relationship for a Buck or synchronous Buck converter is illustrated by curve 21 in FIG. 1C in graph 20. Notice that a Buck converter cannot smoothly reach a zero or unity transfer characteristic without exhibiting some discontinuity at the extremes of D . This phenomenon occurs due to switching delays in the power MOSFET switch and its control and gate drive circuitry.

[0033] So long as the Buck converter’s power MOSFET 3 is still switching, t_{sw} is limited to some portion of the clock period T , e.g. $5\% < D < 95\%$, essentially due to turn-on and turn-off delay within the MOSFET switch and its control loop. For example at a 95% duty factor and a 3 MHz clock frequency, the off time for the high-side MOSFET 3 is only 5% of the 333 nsec period, or just 16 nsec. This means the high side MOSFET 3 must turn off and back in only 16 nsec—too rapidly to regulate over a 95% output-to-input conversion ratio. This minimum off-time problem impacts both synchronous, and non-synchronous Buck converters. This problem is further exacerbated in a synchronous DC/DC converter, since no time remains for the synchronous rectifier MOSFET 2 to turn on and then off again and still exhibit BBM operation.

[0034] Referring again to graph 20 in FIG. 1C, above some maximum duty factor D_{max} , there is not adequate time to maintain switching operation, and the converter jumps from D_{max} to a 100% duty factor, as shown by discontinuity 23. Above D_{max} , the converter turns on the MOSFET 2 and leaves it on for the entire period T . The abrupt transition 23 causes a

glitch in the output voltage. Thus, at a 100% duty factor, $V_{out} = V_{in}$ and all regulation is lost as long as the switching is halted.

[0035] A similar effect limits the operation of a synchronous boost converter near the extremes of its range. Synchronous boost converter 10, shown in FIG. 1B includes a low-side power MOSFET 11, a battery-connected inductor 13, an output capacitor 14, and a “floating” synchronous rectifier MOSFET 12 with an intrinsic parallel rectifier diode 16. The gates of the MOSFETs 11 and 12 are driven by break-before-make circuitry (not shown) and controlled by a PWM control circuit (not shown) in response to a voltage V_{FB} that is fed back from the output voltage V_{OUT} across filter capacitor 14. BBM operation is needed to prevent shorting out output capacitor 14.

[0036] The synchronous rectifier MOSFET 12 is considered to be floating in the sense that neither its source nor drain terminal is not permanently connected to any supply rail, i.e. ground or V_{batt} . Diode 16 is a P-N diode intrinsic to synchronous rectifier MOSFET 12, regardless whether MOSFET 12 is a P-channel or an N-channel device. A Schottky diode may be included in parallel with MOSFET 12 but with series inductance may not operate fast enough to divert current from forward biasing intrinsic diode 16. Diode 17 represents a P-N junction diode intrinsic to N-channel low-side MOSFET 11 and remains reverse-biased under normal boost converter operation.

[0037] If we again define the converter’s duty factor D as the time that energy flows from the battery or power source into DC/DC converter 10, i.e. during the time that low-side MOSFET switch 11 is on and inductor 13 is being magnetized, then the output to input voltage ratio of a boost converter is proportionate to the inverse of 1 minus its duty factor, i.e.

$$\frac{V_{out}}{V_{in}} = \frac{1}{1-D} = \frac{1}{1-t_{sw}/T}$$

[0038] This relationship for a boost or synchronous boost converter is illustrated by curve 22 in graph 20 of FIG. 1C. Notice that the boost converter cannot smoothly reach a unity transfer characteristic without exhibiting some discontinuity at the extreme low end of D . This phenomenon occurs due to switching delays in the power MOSFET switch and its control and gate drive circuitry.

[0039] So long as the boost converter’s power MOSFET 11 is still switching, t_{sw} is limited to some portion of the clock period T , e.g. $5\% < D < 95\%$, essentially due to turn-on and turn-off delay within the MOSFET 11 and its control loop. For example, at a 5% duty factor and a 3 MHz clock, the off time for the low-side MOSFET 11 is only 5% of the 333 nsec period, or just 16 nsec. This means the low side MOSFET 11 must turn on and back off in only 16 nsec—too rapidly to regulate below a 5% output-to-input conversion ratio. This minimum on-time problem impacts either synchronous or non-synchronous boost converters.

[0040] Referring again to graph 20, below some minimum duty factor D_{min} , there is not adequate time to maintain switching operation and the converter must jump from D_{min} to 0% duty factor as shown by discontinuity 24. Below D_{min} , the converter turns on the synchronous rectifier MOSFET 12 and leaves it on for the entire period T . The abrupt transition 24 causes a glitch in the output voltage of boost converter 10.

Moreover, at a 100% duty factor, $V_{out}=V_{in}$ and all regulation is lost as long as the switching is halted.

[0041] So in both synchronous Buck converter 1 and synchronous boost converter 10, operating near a unity transfer characteristic, i.e. where $V_{out}\approx V_{in}$, is problematic.

Buck-Boost Switching Converter)

[0042] The problem of non-isolated DC/DC switching converter operation near unity transfer is especially difficult in applications when the input voltage may vary above or below the desired output voltage. Examples of this situation include the output of noisy AC adapters or circuitry which must operate by battery back-up during emergency conditions when a main source of power has failed.

[0043] FIG. 2 illustrates another scenario where a conversion ratio above and below unity is required. Graph 25 illustrates the discharge characteristic of a Lilon battery under a constant load current, starting at 4.2V at full charge, decaying rapidly during discharge interval 26, then slowly decaying from 3.7V to 3.5V in interval 27, and finally dropping quickly in interval 28 to its cutoff at below 3V.

[0044] In the event that a DC/DC converter is needed to produce a well-regulated 3.3V output during the entire duration, a sub-unity conversion ratio of (3.3V/4.2V), i.e. a ratio of 0.79, is needed at the outset, indicating that a Buck converter is required. At the battery's end-of-life, the conversion ratio exceeds unity becoming 3.3V/3V, i.e. a conversion ratio of 1.1, and requires a boost converter to achieve regulation. Such an application demanding both step-up and step-down conversion requires a Buck-boost, or up-down converter.

[0045] In the case where the user wants to avoid the complexities of up-down conversion, one possible approach is to use only a Buck converter and give up some battery life by cutting of the battery early, e.g. at 3.3V. This approach, upon first inspection seems reasonable since the majority of a Lilon battery's life is above 3.5V. Closer analysis of graph 25 reveals some complications with such an approach.

[0046] Because of the limitations of D_{max} , the converter cannot regulate approaching a unity conversion ratio. If the converter cannot properly regulate below a certain dropout voltage δ where $\delta=V_{batt(min)}-V_{out}$, then the battery cannot be operated all the way down to 3.3V. If for example the drop out of a Buck converter is 300 mV, a converter must cut off operation at 3.6V to guarantee regulation. At 3.6V in and 3.3V out, the switching regulator must operate at a 92% duty factor. Even operating at a duty factor of 92%, which is not an easy task at high frequencies, the majority of the Lilon battery's energy is wasted by using a Buck-only converter solution.

[0047] A Buck-boost converter can easily be derived by combining synchronous Buck and boost converters into a merged or cascade circuit. In the schematic diagram of FIG. 3A, for example, a synchronous boost converter 30 comprising a low-side MOSFET 31, an inductor 33, a synchronous rectifier MOSFET 35, an intrinsic diode 35, and a filter capacitor 34, is used to power a synchronous Buck converter comprising a MOSFET 37, an inductor 39, a synchronous rectifier MOSFET 38, an intrinsic diode 42, and a filter capacitor 40, the combined cascade converter 30 collectively driving a load 41. In this approach the input voltage is first stepped-up to a voltage V_y , higher than the desired output, then back down to produce V_{out} .

[0048] The overall efficiency of this boost-Buck topology is given by the product of the boost converter's efficiency

η_{boost} multiplied by the Buck converter's efficiency η_{Buck} . Even if both converters are 85% efficient, the combined cascade converter only reaches roughly 70% overall efficiency. Moreover, the converter as shown requires two inductors, a characteristic highly undesirable from a user's point-of-view.

[0049] Conversely in FIG. 3B, a synchronous Buck converter comprising a MOSFET 52, an inductor 53, a synchronous rectifier MOSFET 51, an intrinsic diode 55, and a filter capacitor 54, is used to power a synchronous boost converter comprising a low-side MOSFET 58, an inductor 57, a synchronous rectifier MOSFET 59, an intrinsic diode 62, a filter capacitor 60, and a load 61. The cascade Buck-boost converter 50 first steps down and regulates the input voltage V_y , lower than the desired output, then steps this voltage up to produce V_{out} .

[0050] Again, the overall efficiency of the Buck-boost cascade converter 50 is given by the product of the individual efficiencies as given by $\eta_{cascade}=\eta_{Buck}\cdot\eta_{boost}$. The overall loss in a Buck-boost cascade converter is worse than the loss in a synchronous Buck converter or a synchronous boost converter alone, because there are more transistors in series between the input and output terminals, and because all the MOSFETs are switching all the time. Unlike converter 30, which required two inductors, however, converter 50 has two inductors 53 and 57 connected in series. Since series-connected inductors share the same current, they can be replaced by a single inductor, and doing so also eliminates the need for capacitor 54.

[0051] The resulting Buck-boost converter 70 is illustrated in FIG. 4, comprising a single inductor 73, four MOSFETs 71, 72, 76, and 77, a filter capacitor 80, a load 81, a PWM control circuit 83 and a break-before-make and gate buffer circuit 82. An intrinsic diode 74 in parallel with MOSFET 71, and an intrinsic diode 78 in parallel with MOSFET 77 act as rectifiers during certain operating conditions such as BBM intervals, while diodes 75 and 79 normally remain reversed biased. Depending on its terminal conditions, converter 70 can operate in three distinct modes, Buck, boost, and Buck-boost.

[0052] With MOSFETs numbered $i=1$ to 4 representing respectively MOSFETs 71, 72, 76 and 77, the overall total power loss is then given by

$$P_{total} = \sum_{i=1}^4 (P_{conduction} + P_{drive})_i$$

[0053] The equation illustrates that all four MOSFETs exhibit conduction losses, in proportion to their on-time, and all four MOSFETs also exhibit switching losses, in proportion to their switching frequency.

[0054] In FIG. 5A, schematic diagram 85 represents the operation of Buck-boost converter 70 as a Buck converter where MOSFETs 71 and 72 are switched out of phase under PWM control while MOSFET 77 remains turned-on and MOSFET 76 is biased off. The overall loss in converter 70 is greater than the loss in a synchronous Buck converter because it now includes the conduction loss in MOSFET 77, namely

$$P_{total} = \sum_{i=1}^2 (P_{conduction} + P_{drive})_i + (P_{conduction})_4$$

[0055] The equivalent circuit 90 of FIG. 5B illustrates MOSFET 72, synchronous rectifier MOSFET 71, parallel rectifier diode 74, inductor 73 and series resistance 91 of fully-enhanced MOSFET 77 shunting diode 78. Off state MOSFET 76 is illustrated as reverse-biased P-N diode 79. The Buck converter mode of Buck boost converter 70 works so long as the criterion $V_{in} > (V_{out} + \delta)$ is maintained.

[0056] Because of series resistance 91 associated with on MOSFET 77, the efficiency of a Buck-boost converter 70 of FIG. 4 operating in a Buck converter mode is lower than that of the simple Buck converter 1 shown in FIG. 1A. This characteristic can be seen in the efficiency graph of FIG. 7A, where the Buck-only efficiency (curve 110) is higher, typically 5% to 15% percent higher, than that of the Buck-mode efficiency (curve 107) of a Buck-boost converter.

[0057] In FIG. 6A, schematic diagram 95 represents the operation of Buck-boost converter 70 as a boost converter where MOSFETs 76 and 77 are switched out of phase under PWM control while MOSFET 72 remains turned-on and MOSFET 71 is biased off. The converter's overall loss is greater than the loss of a synchronous Buck converter because it now includes the conduction loss of MOSFET 72, namely

$$P_{total} = \sum_{i=3}^4 (P_{conduction} + P_{drive})_i + (P_{conduction})_1$$

[0058] The equivalent circuit 100 of FIG. 6B illustrates switch MOSFET 76, synchronous rectifier MOSFET 77, parallel rectifier diode 78, inductor 73 and series resistance 101 of fully-enhanced MOSFET 72. Diodes 74, 75 and 79 remain reverse-biased and off. The boost converter mode of Buck-boost converter 70 works so long that the criterion $V_{in} < (V_{out} - \delta)$ is maintained.

[0059] Because of series resistance 101 associated with on MOSFET 72, the efficiency of a Buck-boost converter 70 of FIG. 4 operating in boost converter mode 95 is lower than that of the simple boost converter 10 shown in FIG. 1B. This characteristic can be seen in the efficiency graph of FIG. 7A, where the boost-only efficiency (curve 111) is higher, typically 5% to 15% percent higher, than the boost-mode efficiency (curve 108) of a Buck-boost converter.

[0060] Notice also that boost mode operation efficiency (curve 108) is lower than Buck-mode operation, primarily because boost converters require higher average switch currents than Buck converters, increasing conduction losses. The higher conduction losses in boost converter MOSFETs can be compensated by employing larger lower-resistance power MOSFETs, but only by increasing the input capacitance, gate charge, and gate drive related switching losses, canceling most of the benefit of the lower conduction loss device. The problem is further exacerbated in a Buck-boost converter operating in boost mode, since more series resistance is present at all times due to the resistance 101 related to MOSFET 72.

[0061] In between the Buck-only and the boost-only modes, when the converter approaches a unity conversation

ratio, the circuit must operate in true Buck-boost mode where all four transistors are switching. That range occurs where the converter exceeds the maximum duty factor D_{max} for a Buck converter or falls below the minimum duty factor D_{min} for a boost.

[0062] Table 1 summarizes the operation of Buck-boost converter 70 in the Buck, boost and Buck-boost modes:

TABLE 1

Mode	Criteria	Switching	Full On	Off
Buck	$V_{in} > (V_{out} + \delta)$	M1, M2	M4	M3
Buck-Boost	$(V_{out} + \delta) > V_{in} > (V_{out} - \delta)$	M1, M2, M3, M4	none	none
Boost	$V_{in} < (V_{out} - \delta)$	M3, M4	M2	M1

[0063] The switching converter's Buck-boost mode therefore occurs whenever

$$\frac{V_{out}}{V_{in}} < (1 \pm \delta)$$

[0064] Since all four transistors are switching in the Buck-boost mode, the losses are greater than in the Buck-only or boost-only mode. This characteristic is illustrated in FIG. 7A, where the efficiency of converter 70 in the Buck-boost mode (curve 106) is lower than the efficiency of Buck-boost converter 70 operating in Buck-only mode (curve 107) and boost-only mode (curve 108), resulting a rapid drop in efficiency whenever four-switch Buck-boost operation commences. As shown, converter 70 operates only in Buck-boost mode when it has to do so, i.e. for V_{out}/V_{in} conversion ratios near unity, and by example between 0.9 and 1.1.

[0065] In the event that converter 70 must operate constantly in four-switch Buck-boost mode, the efficiency follows curve 112A when stepping down, which is considerably lower than the efficiency in the Buck-only mode (curve 107) and far below the efficiency of a simple synchronous Buck converter (curve 110). Similarly, four-switch Buck-boost operation in the step-up mode follows curve 112B with efficiencies considerably lower than the efficiency in boost-only mode (curve 108) and far below the efficiency of a simple synchronous boost converter (curve 111). So while mode switching of a Buck-boost converter limits the loss four-switch Buck-boost operation to near unity voltage conversion ratios, the Buck-boost converter is categorically less efficient than a Buck converter or a boost converter alone.

[0066] Since producing a regulated 3.3V output from a Lilon battery falls close to this $\pm\delta$ range surrounding a unity voltage conversion ratio, the greatest portion of the Lilon battery's stored energy occurs at a voltage where the Buck-boost converter's efficiency is poorest, in the range of 3.5V to 3.6V. Moreover, the fact that the converter must go through a mode transition whenever the conversion ratio is near unity can be a real problem in a number of applications, affecting transient regulation, stability and noise.

[0067] Clearly, the Buck-boost switching regulator has many disadvantages, and especially so when operating at or near unity conversion ratios.

Charge Pump Converters

[0068] An alternative to the switched-inductor converter is a charge pump, a voltage conversion circuit using only

switches and capacitors to perform voltage translation through repeated charge redistribution, i.e. the continuous charging and discharging of a capacitor network driven by a clock or oscillator.

[0069] The advantage of a charge pump is that at specific voltage conversion ratios, it can exhibit extremely high conversion efficiencies approaching 100%. The disadvantage is that it can only efficiently generate voltages that are exact integral multiples of the number of flying capacitors used in its converter circuit. Voltages other than select multiples exhibit low efficiencies.

[0070] A common charge pump 150 is illustrated in FIG. 8A, where a single capacitor is employed as a “doubler”, i.e. to double the battery’s input voltage. Charge pump 150 comprises four MOSFETs, 152, 153, 154 and 155 configured similar to an H-bridge except that one terminal, the source of MOSFET 154 is connected to the charge pump output V_{CP} and reservoir capacitor 166 rather than to ground.

[0071] Charge pump operation can be understood by modeling the MOSFETs as ideal switches where in the equivalent circuits 160 and 180 of FIGS. 8B and 8C, MOSFETs 152, 153, 154 and 155 are represented as switches 162, 163, 164 and 165 respectively. During the charging phase, shown in FIG. 8B, diagonal switches 162 and 165 are closed, driving node V_x to ground and node V_y to V_{batt} and charging a flying capacitor 151 to the voltage V_{batt} . During the charging cycle, switches 163 and 164 remain open.

[0072] In the charge transfer and discharge phase, shown in FIG. 8C, switches 162 and 165 are opened, switches 163 and 164 are closed, and energy is transferred from the flying capacitor 151 to the output reservoir capacitor 166, pumping the V_{CP} voltage to a value twice the battery voltage or $2 \cdot V_{batt}$.

[0073] The purpose of the switch network is essentially to place flying capacitor 151 in parallel with the battery during charging and in series, i.e. stacked on top of the battery’s positive terminal, during discharging. The cycle then repeats with another charging phase.

[0074] A single flying capacitor charge pump is capable of efficiently delivering power only at twice its input, or alternatively if the capacitor is connected to the negative terminal of the battery to produce a mirror-image negative voltage of the battery, i.e. $-V_{batt}$ also known as an inverter.

[0075] FIG. 9A illustrates a charge pump 170 utilizing two flying capacitors 173 and 177 and a network of seven MOSFETs 171, 172, 174, 175, 176, 178 and 179. The purpose of the network is to charge the capacitors in series, charge them each to half the battery voltage, i.e. $V_{batt}/2$. After charging, the two charged capacitors are connected in parallel, and connected to the positive terminal of the battery. The resulting output is then $V_{batt} + V_{batt}/2$ for an output voltage of $1.5V_{batt}$. Because the output is 1.5 times its input this charge pump is sometimes referred to as a “fractional” charge pump.

[0076] Schematic diagram 183 and 185 in FIGS. 9B and 9C represent the simple switch equivalent model for operating a fractional charge pump where switches 181, 182, 184, 185, 186, 188 and 189 represent MOSFETs 171, 172, 174, 175, 176, 178 and 179, respectively. In the charging cycle, shown in FIG. 9B, switch 181 is closed grounding V_x , switch 189 is closed driving the voltage V_z to the input voltage V_{batt} and switch 185 is closed, i.e. $V_y = V_w$, thereby placing capacitors 173 and 177 in series. If the capacitors have the same value they will each charge to a voltage $V_{batt}/2$. All the other switches remain open in the charging phase.

[0077] In the discharge phase, shown in FIG. 9C, all of the switches are opened, and high-side switches 182 and 186 are closed connecting the V_x and V_w , the negative terminals of the flying capacitors, to V_{batt} . At the same time, switches 184 and 188 are closed connecting V_y and V_z , the positive terminals of the capacitors to the output V_{CP} and reservoir capacitor 180. The cycle then repeats constantly either at a fixed or varying frequency.

[0078] FIGS. 10A-10D illustrate several charge pump voltage converters possible with switched-capacitor networks, represented during their discharge cycle. In FIG. 10A, a charge pump doubler 200 combines a battery input voltage source 201 with a single flying capacitor 202 stacked atop it, to produce a voltage twice the battery input, i.e. $2 \cdot V_{batt}$. In FIG. 10B, an inverter 205 stacks a single flying capacitor 206 beneath voltage input 207 to produce a below ground output voltage of $-V_{batt}$, essentially a negative mirror image of the input voltage.

[0079] In FIG. 10C, a fractional charge pump 210 charges capacitors 212 and 213 to $V_{batt}/2$ then stacks them atop V_{batt} voltage source 211 to produce an output 1.5 times its input. Alternatively, in FIG. 10D, capacitors 217 and 218 charged to $V_{batt}/2$, are connected to ground, the same negative terminal of voltage source 216, producing an output voltage of one-half the battery voltage, i.e. $+0.5V_{batt}$. A voltage $-0.5V_{batt}$ is also possible by referencing the flying capacitors below ground, i.e. with their positive terminal tied to ground.

[0080] As shown, charge pumps with two flying capacitors can produce various integral multiples “n” of one-half their input voltage, or as

$$V_{CP} = n \cdot \left(\frac{V_{batt}}{2} \right) \text{ where } n = \{-2, -1, 0, +1, +2, +3, +4\}$$

[0081] Specifically, when $n=+2$, the output V_{CP} is equal to the battery voltage V_{batt} , behaving identical to a direct battery connection. Operating a two-capacitor fractional charge pump in a single-capacitor converter mode, $n=+4$ behaves as a doubler where $V_{CP}=2V_{batt}$ and $n=-2$ behaves as an inverter, where $V_{CP}=-V_{batt}$. Operating in two-capacitor fractional mode, $n=-1$ produces $V_{CP}=-1/2V_{batt}$, $n=+1$ produces $V_{CP}=+1/2V_{batt}$ and $n=+3$ produces $V_{CP}=+1.5V_{batt}$. When $n=0$ the converter is off and $V_{CP}=0$, i.e. grounded or alternatively floating. A fractional charge pump can actually switch among these various inverting, fractional and doubler modes automatically as needed.

[0082] A problem with charge pump converters is they operate efficiently only at integral multiples of the number of flying capacitors; in other words, they are not voltage regulators. Specifically, as a desired load voltage V_{out} drops below the voltage V_{CP} that the capacitor network produces, the converter cannot adapt. The voltage-differential between the charge pump’s output voltage V_{CP} and the regulated output voltage of the converter V_{out} requires a resistor or current source to support the voltage mismatch, and the voltage across that lossy element results in lost power and reduced

efficiency. The efficiency equation of the charge pump supplying an output voltage V_{out} can be expressed by adapting the mathematical form for linear regulator efficiency, herein as

$$\eta_{CP} = \frac{V_{out}}{V_{CP}} = \frac{V_{out}}{n \cdot \left(\frac{V_{batt}}{2}\right)}$$

where $n = \{-2, -1, 0, +1, +2, +3, +4\}$ and where $V_{out} \leq V_{CP}$.

[0083] This efficiency equation for single-mode charge pumps is illustrated graphically in FIG. 11A where $V_{batt} = V_{in}$ for various integral multipliers, including a doubler (curve 221), an inverter (curve 222), and fractional charge pumps (curves 223, 224 and 225). Curve 226 represents a direct battery connection, identical to a linear regulator's maximum theoretical efficiency, i.e. assuming no quiescent operating current. In each case, as the input to output ratio approaches an integral multiple of $\pm 1/2 V_{batt}$, the efficiency increases. The charge pump is not capable of delivering a voltage higher than that voltage, and a different capacitor multiplier, i.e. a different operating mode must be employed.

[0084] Each curve shown in FIG. 11A represents a specific charge pump circuit, e.g. including those shown previously in FIGS. 8, 9 and 10. Unless a load operates at an exact half-volt integral multiple of the input voltage, however, the efficiency of the charge pump converter will suffer. This behavior is especially problematic for battery powered products where the battery voltage changes markedly as the cell discharges. In the case of Lilon batteries, the voltage can decay more than 1V during discharge, representing a 25% change. Even if the peak efficiency may be high at one specific operating condition and battery voltage, the overall efficiency of the converter averaged over the battery discharge curve is poor. Weighted average efficiencies can be lower than 60% using a single-mode charge pump.

[0085] One way to improve the average efficiency of the converter is to switch modes between 1x, 1.5x and 2x automatically within one circuit. This feature is particularly useful to supply a fixed voltage over a wide input range. An example of the efficiency of a mode changing charge pump is illustrated in FIG. 11B, which shows the efficiency as a tri-mode converter circuit switches from 1x-battery-direct mode (curve 247), to 1.5x-fractional-mode (curve 244), and again to a 2x-doubler-mode (curve 241) as the battery decays. By switching modes in this zigzag pattern, the efficiency of the charge pump converter is improved because the output is not pumped to an excessively high value compared to the load, and the overall efficiency improves.

[0086] Unfortunately, conditions still exist where the efficiency suffers substantially. The mode transitions exhibit dramatic shifts in efficiency (curve 246) at a conversion ratio of one, and again (curve 243) at a 1.5x conversion ratio. The mode transitions may also result in sudden current and voltage discontinuities, or produce instability or noise. To determine what conversion ratio is required graph 240 also includes curves 248, 249, and 250 relating the required input voltage range and conversion ratios to produce output voltages of 3V, 3.5V and 4V, respectively.

[0087] Specifically, the charge pump converter in 1.5x mode does not perform well for conditions slightly above a

unity conversion ratio, unfortunately manifesting even lower efficiencies than an inductive Buck-boost converter.

Efficiency of Regulated Charge Pumps

[0088] The real issue of charge pump as a power supply is that the charge pump converter is not by itself a voltage regulator since it produces only certain fixed voltage multiples. To regulate its output voltage or output current, the charge pump must produce a voltage greater than the desired output and some pass element must be inserted in series between the load and the output of the charge pump converter. The voltage differential between the charge pump's higher output voltage and a specific desired output voltage must then be supported across this series element. Examples of prior art series-pass elements include linear regulators, current sources, or resistors, all of which are lossy, i.e. dissipate power as heat and reduce the charge pump regulator's overall efficiency. Losses are given by the voltage differential present across the series pass element and the current flowing through such an element.

[0089] For example, in schematic diagram 260 of FIG. 12A, a charge pump 262 with capacitors 263 and 264 is powered by a battery or other voltage source 261 to produce a voltage V_{CP} across a reservoir capacitor 265. Since this voltage is higher than a desired output voltage V_{out} needed to power load 262, a low dropout (LDO) linear regulator 266 must support the difference ΔV_{LDO} while conducting current, thereby dissipating heat and reducing efficiency. Even if the quiescent currents I_{QCP} and I_{QLDO} flowing to ground in charge pump 262 and LDO regulator 266 are zero, the efficiency is still limited to a maximum value of V_{out}/V_{CP} , the output to input ratio of the LDO pass element. The greater the voltage differential between the charge pump's output V_{CP} and the desired regulated load voltage V_{out} (i.e. the greater the ΔV across the LDO regulator), the worse the converter's efficiency becomes.

[0090] The efficiency problem is not avoided by placing the LDO regulator 282 in front of charge pump 284 as a pre-regulator, as shown in FIG. 12B, since the output voltage V_{LDO} of LDO regulator 282 is necessarily some integral multiple of the charge pump's output voltage V_{CP} , and this voltage differs from V_{in} by an amount ΔV_{LDO} —a voltage supported across LDO regulator 282 while it is conducting current. The effect is the same as the prior example with LDO post regulation—the series pass element LDO regulator 282 must support a voltage differential across its terminals while conducting current. Even if the quiescent currents I_{QCP} and I_{QLDO} flowing to ground in charge pump 284 and LDO regulator 282 are zero, the efficiency is still limited to a maximum value of V_{LDO}/V_{in} , the output-to-input ratio of the LDO pass element.

[0091] Using a current source instead of an LDO regulator does not improve the efficiency of the circuit. As illustrated in circuit 300 of FIG. 12C, inserting a current source 306 between a load 308 and the output terminal of a charge pump 302 still forces the pass element to support a voltage differential ΔV while it conducts current. This difference between the output of charge pump 302 (V_{CP}) and the voltage across filter capacitor 307 (V_{out}) must be supported by the conducting current source, and therefore contributes to efficiency loss and wasted power. Even with a 100%-efficient charge pump, the overall converter efficiency is limited to a maximum value of V_{out}/V_{CP} , the output-to-input ratio across the series pass element, in this case, current source 306.

[0092] Incorporating the current source or regulating function into one of the charge pump switches has the same impact on overall regulator efficiency as using a separate regulating element. As shown in schematic diagram 320 of FIG. 12D, a current source 326 represents one switch of a charge pump doubler comprising MOSFETs 322, 323 and 324 and a

capacitor 325. A selector switch 327 biases current source 326 as either an “on” current source or an “off” switch, depending on the mode, so that it behaves as a switched current source conducting a fixed current or no current at all. When the current through current source 326 is zero, no power is dissipated in the switched current source 326. When it current source 326 is on and acting as a current source, however, current source 326 must still must dissipate power. Specifically, during conduction, this controlled current source 326 must support a differential voltage $V_y - V_{out}$ across its terminals. As a consequence, it still dissipates power and degrades efficiency.

[0093] Eliminating the series pass device in a charge pump regulator does not improve efficiency. As shown in FIG. 12E, even if no device is intentionally included to support the mismatch between the output voltage V_{out} and the charge pump’s output V_{CP} , a distributed parasitic resistance 346 present in the circuit will necessarily support the ΔV between the load 347 and charge pump 342, and power is lost in this resistance in the form of heat as if a series pass device were intentionally inserted.

[0094] Even in the event that somehow the circuit’s series resistance was somehow made zero, the voltage differential would appear across one of the MOSFET switches, forcing the device to saturate, and drop the full voltage differential across its terminals while conducting current. In such a case power is still lost, in an amount equal to the differential voltage times the load current, no matter how the differential voltage is distributed throughout the circuit.

[0095] So any voltage differential ΔV between a charge pump’s output voltage V_{CP} and a regulated load voltage V_{out} results in loss of efficiency. Only by reducing the voltage differential ΔV across a series pass element, i.e. supplying a regulated voltage very close to the charge pump’s output voltage—can efficiency be improved. Dynamically changing among single, fractional and doubler modes helps reduce this differential to certain multiples given by $\{V_{out} - V_{CP}\} = \{V_{out} - n \cdot V_{in}\}$ where n can change among $1\times$, $1.5\times$ or $2\times$ modes.

[0096] Operating a charge pump near unity voltage conversion ratios where $V_{out} \approx V_{in}$ and ΔV across a series pass element is small, the efficiency of regulated charge pumps is greatly improved. Unfortunately for small ΔV , another phenomenon referred to as “dropout” can degrade the accuracy and quality of voltage regulation. The problem of dropout also plagues prior art switching regulators.

Dropout in Prior Art Regulators

[0097] Whenever the input and the output voltages of a voltage regulator approach one another within the range of several hundred millivolts, i.e. $V_{out} \approx V_{in} \pm 200$ mV, the quality of the converter’s regulating ability suffers. Loss of regulation quality may be manifest in several ways, either by a one-time or repeated glitch or discontinuity in output voltage, by increased ripple, or by complete loss of regulation within some narrow voltage band. The phenomenon of degraded regulation whenever V_{out} approaches V_{in} is referred to as “dropout”, meaning the converter drops out of regulation.

[0098] The Buck converter of FIG. 1A and the boost converter of FIG. 1B both momentarily lose regulation as their switching duty factor jumps from D_{max} or D_{min} to 100% and they completely lose regulation while $D=100\%$, since the input terminal is essentially resistively connected to the output terminal during the dropout condition.

[0099] While the Buck-boost converter doesn’t really exhibit permanent dropout, it can easily suffer a voltage glitch during mode transitions whenever the converter mode switches from a Buck converter into its Buck mode into its Buck-boost mode, or when switching from Buck-boost mode to boost mode. Mode transitions occur whenever the converter changes from a circuit where two power devices are switching into one where four devices are switching, or vice versa.

[0100] To avoid the mode switching transition problem, a Buck boost converter can be run continuously in Buck-boost mode with all four power devices switching continuously, but then the efficiency is degraded under all input-output conditions and conversion ratios.

[0101] As stated previously, a charge pump is incapable of regulating voltage without the use of a series-connected linear regulator or a current source such as shown in FIGS. 12A through 12D to provide the regulation function. To maintain a high efficiency, however, a regulated charge pump cannot impose too much voltage across its series regulator, and must therefore change modes during varying input-output conditions as shown in FIG. 11B. As the voltage conversion ratio approaches unity, the most efficient operating mode is the $1\times$ mode shown by curve 247 in FIG. 11B. Under the $1\times$ mode the charge pump is not switching and a series connected linear regulator or current source must provide regulation.

[0102] Unfortunately, it is well known phenomenon that all linear regulators exhibit loss of regulation, i.e. dropout, whenever ΔV across the linear regulator’s input and output terminals becomes too small. In essence, dropout occurs in a linear regulator because the loop gain of the amplifier performing regulation drops precipitously as its transistor pass element changes from acting as a current source to acting as a variable resistor. If the pass element is a bipolar transistor, the loss of gain occurs at small values of V_{CE} as the device transitions from its active operating region into saturation. In many bipolar linear regulators, this dropout condition occurs at more than 400 mV.

[0103] In low-dropout linear regulators, a MOSFET capable of operating as a current source at a lower ΔV is substituted for the bipolar pass element, but the linear regulator still drops out at 200 to 300 mV as the power MOSFET pass element transitions from its saturation, i.e. constant current, region into its linear, i.e. resistive, region of operation.

[0104] In conclusion, prior-art non-isolated high-efficiency converters exhibit dropout at voltage conversion ratios approaching unity. Mode switching, loss of regulation and dropout can be avoided, but only by sacrificing efficiency. Isolated converters such as the flyback and forward converter are able to operate at high efficiencies near unity conversion without the need switching modes, but their use of physically-large tapped inductors, coupled inductors, and transformers precludes their application in most portable products.

Summary of Prior-Art Down-Up Converters

[0105] In conclusion, existing charge pump converters, Buck-boost switching regulators and other inductive switching regulators are not able to both step-up and step-down DC voltages efficiently, especially for conversion ratios near unity where $V_{in} \approx V_{out}$. What is needed is an up-down converter that is efficient over a wide range of input and output voltages, and that does not need to change its operating mode as it approaches or operates near unity voltage conversion ratios, i.e. when $V_{out} \approx V_{in}$. Furthermore, the converter should

be free from dropout problems, maintaining high quality regulation even while biased with an output voltage within a 200 mV of its input, i.e. within the range $V_{out} \approx V_{in} \pm 200$ mV.

SUMMARY OF THE INVENTION

[0106] In accordance with this invention, a DC/DC converter comprises a step-down, switched-inductor pre-regulator and a switched-capacitor post-converter. The output terminal of the step-down, switched-inductor pre-regulator is connected to the input terminal of the switched-capacitor post-converter. The switched-capacitor post-converter may comprise a charge pump that multiplies the voltage at its input terminal by an integral or fractional value, or it may be an inverter that multiplies the voltage at its input terminal by a negative integral or fractional value. The step-down, switched-inductor pre-regulator may comprise a Buck converter having a high-side switch connected in a series path with a low-side switch and an inductor connected to a point in the series path between the high-side switch and the low-side switch. In some embodiments, each of the high-side and low-side switches comprises a MOSFET.

[0107] The pre-regulator steps the input voltage down, and the post-converter either steps the voltage produced by the pre-regulator up or down by an integral or fractional value or multiplies the voltage produced by the pre-regulator by a negative integral or fractional value. Preferably the output voltage of the DC/DC converter is controlled by a feedback path that may extend from the output terminal of the pre-regulator or the post-converter to a pulse width modulation unit that controls the duty factor of the pre-regulator. In some embodiments, the feedback path includes a level shift unit or other circuitry that modifies the feedback signal.

[0108] The DC/DC converter of this invention is capable of operating over a wide range of voltage conversion ratios, ranging from step-up to step-down conversion without the need for mode switching. Free from mode switching and dropout problems when $V_{out} \approx V_{in}$, the converter does not suffer from noise glitches, poor regulation, and instability, even near unity input-to-output voltage conversion ratios. While the converter includes switched-inductor operation, it avoids the minimum pulse width problem plaguing conventional switching regulators at very high and very low duty factors, including regulator dropout, narrow pulses and associated high-current spikes, variable frequency operation, inadequate time to perform break-before-make transitions.

[0109] Another aspect of this invention comprises a method of converting a first DC voltage to a second DC voltage. The method comprises: providing at least one inductor and at least one capacitor; during a first time interval coupling a first terminal of the at least one inductor to the first DC voltage; during a second time interval coupling the first terminal of the at least one inductor to a second voltage, thereby producing an intermediate voltage at a second terminal of the at least one inductor; during a third time interval coupling a first terminal of the at least one capacitor to the intermediate voltage and coupling a second terminal of the at least one capacitor to a third voltage; and during a fourth time interval coupling the second terminal of the at least one capacitor to the intermediate voltage and coupling the first terminal of the at least one capacitor to an output terminal, thereby providing the second DC voltage at the output terminal. Variations of the method comprise, during the fourth time interval, coupling the second terminal of the at least one capacitor to a fourth voltage and coupling the first terminal of the at least one capacitor to an

output terminal or coupling the first terminal of the at least one capacitor to ground and coupling the second terminal of the at least one capacitor to an output terminal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0110] This invention will be better understood by reference to the following drawings, in which like components are identified by similar reference numbers.

[0111] FIG. 1A is a schematic circuit diagram of a prior-art non-isolated DC/DC synchronous Buck converter.

[0112] FIG. 1B is a schematic circuit diagram of a prior-art synchronous boost converter.

[0113] FIG. 1C is a graph showing the duty factor dependence of conversion ratio as a function of the duty factor for the devices shown in FIGS. 1A and 1B.

[0114] FIG. 2 is a graph showing the discharge characteristics of single-cell Lilon battery.

[0115] FIG. 3A is a circuit diagram of a prior art cascaded boost-Buck converter.

[0116] FIG. 3B is a circuit diagram of a prior art cascaded Buck-boost converter.

[0117] FIG. 4 is a circuit diagram of a prior art Buck-boost converter.

[0118] FIG. 5A is a circuit diagram illustrating bias conditions in the Buck mode operation of Buck-boost converter.

[0119] FIG. 5B is an equivalent circuit of the circuit shown in FIG. 5A.

[0120] FIG. 6A is a circuit diagram illustrating bias conditions in the boost mode operation of Buck-boost converter.

[0121] FIG. 6B is an equivalent circuit of the circuit shown in FIG. 6A.

[0122] FIG. 7 is a graph illustrating the efficiency of a Buck-boost converter as a function of the conversion ratio.

[0123] FIG. 8A is a circuit diagram of a prior art charge pump doubler.

[0124] FIG. 8B is a circuit diagram illustrating the charging operation of the charge pump doubler.

[0125] FIG. 8C is a circuit diagram illustrating the discharging operation of the charge pump doubler.

[0126] FIG. 9A is a circuit diagram of a prior art fractional charge pump.

[0127] FIG. 9B is a circuit diagram illustrating the charging operation of the fractional charge pump.

[0128] FIG. 9C is a circuit diagram illustrating the discharging operation of the fractional charge pump.

[0129] FIG. 10A is an equivalent circuit showing a +2×-mode single-capacitor doubler during its discharge cycle.

[0130] FIG. 10B is an equivalent circuit showing a -X-mode single-capacitor inverter during its discharge cycle.

[0131] FIG. 10C is an equivalent circuit showing a +1.5×-mode dual-capacitor fractional charge pump during its discharge cycle.

[0132] FIG. 10D is an equivalent circuit showing a +0.5×-mode dual-capacitor fractional charge pump during its discharge cycle.

[0133] FIG. 11A is a graph showing the efficiency of a single-mode charge pump as a function of its conversion ratio.

[0134] FIG. 11B is a graph showing the efficiency of a tri-mode charge pump as a function of its conversion ratio.

[0135] FIG. 12A is an equivalent circuit of a charge pump with LDO post-converter.

[0136] FIG. 12B is an equivalent circuit of a charge pump with LDO pre-regulator.

[0137] FIG. 12C is an equivalent circuit of a charge pump with current source follower.

[0138] FIG. 12D is an equivalent circuit of a charge pump with integral switched current source.

[0139] FIG. 12E is an equivalent circuit of a charge pump with series output resistance.

[0140] FIG. 13 is a graph showing the requisite voltage conversion ratio V_{out}/V_{in} of a DC/DC converter operating at a variety of voltage outputs and for inputs ranging from 1.8V to 6.6V.

[0141] FIG. 14A is a schematic circuit diagram of a switched LCDU down-up regulating converter in accordance with the invention.

[0142] FIG. 14B is a circuit diagram of a feedback circuit that may be used to control the output voltage of the converter.

[0143] FIG. 15A is a behavioral model of the switched LCDU regulating converter of this invention.

[0144] FIG. 15B is a graph showing the input voltage dependence of output voltage V_{out} , intermediate voltage V_y , and voltage conversion ratio for a 3.3V LCDU regulator of this invention.

[0145] FIG. 15C is a graph showing the voltage conversion ratio as a function of the duty factor for a 2×LCDU converter of this invention.

[0146] FIG. 15D is a graph showing the efficiency of the LCDU converter as a function of the pre-regulator voltage conversion ratio V_y/V_{in} .

[0147] FIG. 15E is a graph showing the efficiency of the up converter as a function of the voltage conversion ratio V_{out}/V_y .

[0148] FIG. 15F is a graph showing the overall efficiency of the converter as a function of the conversion ratio of V_{out}/V_{in} .

[0149] FIG. 15G is a graph showing the efficiency of the converter as a function of the duty factor and voltage conversion ratio.

[0150] FIG. 15H is a graph of the efficiency of an idealized 2×-type LCDU converter as a function of the duty factor for various voltage conversion ratios.

[0151] FIG. 15I is a graph of the efficiency of a non-idealized 2×-type LCDU converter as a function of the duty factor for various voltage conversion ratios.

[0152] FIG. 16 is a graph comparing the efficiency of Buck, CP and switched LCDU converters as a function of voltage conversion ratio.

[0153] FIG. 17 is a graph showing the input voltage, intermediate voltage V_y , and output voltage of a switched LCDU regulating converter during the discharge of single-cell Lilon battery.

[0154] FIG. 18 is a schematic circuit diagram of a doubler-type switched LCDU regulating converter of this invention.

[0155] FIG. 19A is a circuit diagram illustrating the operation of a switched LCDU regulating converter during the magnetizing-charging stage.

[0156] FIG. 19B is a circuit diagram illustrating the operation of a switched LCDU regulating converter during the recirculating-transferring stage.

[0157] FIG. 20 is a circuit diagram illustrating the operation of a switched LCDU converter in CP-bypass down-only mode.

[0158] FIG. 21A is a circuit diagram of a doubler type LCDU converter.

[0159] FIG. 21B is a circuit diagram of a fractional type LCDU converter.

[0160] FIG. 21C is a circuit diagram of a fractional type LCDD converter.

[0161] FIG. 22 is a graph showing the voltage conversion ratio as a function of duty factor for various LCDX-type regulating converters.

[0162] FIG. 23A is a circuit diagram of a fractional 1.5× LCDU regulating converter.

[0163] FIG. 23B is a circuit diagram of the fractional 1.5× LCDU regulating converter during the magnetizing-charging stage.

[0164] FIG. 23C is a circuit diagram of a fractional 1.5× LCDU regulating converter during the recirculating-transferring stage.

[0165] FIG. 24A is a circuit diagram of a fractional 0.5× LCDD regulating converter.

[0166] FIG. 24B is a circuit diagram of a fractional 0.5× LCDD regulating converter during the magnetizing-charging stage.

[0167] FIG. 24C is a circuit diagram of a fractional 0.5× LCDD regulating converter during the recirculating-transferring stage.

[0168] FIG. 25A is a circuit diagram of a -1×LCDI regulating inverter.

[0169] FIG. 25B is a circuit diagram of a -0.5×LCDI fractional regulating inverter.

[0170] FIG. 26 is a graph showing the voltage conversion ratios for several LCDI-type regulating inverters as a function of the duty cycle.

[0171] FIG. 27A is a circuit diagram of a -1× type LCDI regulating inverter.

[0172] FIG. 27B is a circuit diagram of the ×1× type LCDI inverter during the magnetizing-charging stage.

[0173] FIG. 27C is a circuit diagram of the -1× type LCDI inverter during the recirculating-transferring stage.

[0174] FIG. 28A is a circuit diagram of a fractional -0.5× LCDI regulating inverter.

[0175] FIG. 28B is a circuit diagram of the fractional -0.5× LCDI regulating inverter during the magnetizing-charging stage.

[0176] FIG. 28C is a circuit diagram of the fractional -0.5× LCDI regulating inverter during the recirculating-transferring stage.

[0177] FIG. 29A is a schematic circuit diagram of a level-shifted feedback network for a doubler type LCDU converter.

[0178] FIG. 29B is a schematic circuit diagram of a level-shifted feedback network for a fractional 1.5× type LCDU converter.

[0179] FIG. 29C is a schematic circuit diagram of a bipolar current mirror feedback network for a fractional 0.5× type LCDD converter.

[0180] FIG. 29D is a schematic circuit diagram of a MOS-FET current mirror feedback network for a fractional 0.5× type LCDD converter.

[0181] FIG. 29E is a schematic circuit diagram of a bipolar current mirror feedback network for a 1× type LCDI inverter.

[0182] FIG. 29F is a schematic circuit diagram of a MOS-FET current mirror feedback network for a -1× type LCDI inverter.

[0183] FIG. 29G is a schematic circuit diagram of a MOS-FET current mirror feedback network for a fractional -0.5× type LCDI inverter.

[0184] FIG. 30A is a circuit diagram of a level-shifted feedback circuit from the output terminal of a switched LCDX regulating converter.

[0185] FIG. 30B is a circuit diagram of a non-level shifted feedback from intermediate V_y terminal of a switched LCDX regulating converter.

[0186] FIG. 31A is a circuit diagram of a gate buffer driven from V_{batt} for a high-side P-channel power MOSFET in a switched LCDX converter.

[0187] FIG. 31B is a circuit diagram of a gate buffer driven from the intermediate voltage V_y for a high-side P-channel power MOSFET in a switched LCDX converter.

[0188] FIG. 31C is a circuit diagram of a boot strap gate buffer with resistive level shifting for a high-side N-channel power MOSFET in a switched LCDX converter.

[0189] FIG. 31D is a circuit diagram of a boot strap gate buffer with cross-coupled level shifting for a high-side N-channel power MOSFET in a switched LCDX converter.

[0190] FIG. 31E is a circuit diagram of a gate buffer driven from V_{batt} for a low-side N-channel power MOSFET in a switched LCDX converter.

[0191] FIG. 31F is a circuit diagram of a gate buffer driven from the intermediate voltage V_y for a low-side N-channel power MOSFET in a switched LCDX converter.

[0192] FIG. 32 is a graph showing a comparison of the efficiencies of a tri-mode charge pump and Buck-boost converter to the efficiency of an LCDU converter according to this invention.

DESCRIPTION OF THE INVENTION

[0193] FIG. 13 graphically illustrates the requisite voltage conversion ratio V_{out}/V_{in} of a DC/DC converter operating at a variety of output voltages for various input voltages ranging from 1.8V to 6.6V. For example, curve 361 illustrates that for a 4.5V to 5.5V input range, regulating a 5V output to $\pm 1\%$ accuracy requires operation above and below a unity conversion ratio, meaning an up-down regulating converter is required to hold a tighter tolerance than the $\pm 5\%$ or $\pm 10\%$ accuracy commonly guaranteed by low cost AC/DC wall adapters.

[0194] Another need for up-down conversion occurs when using a lithium ion battery to produce a voltage intermediate to its wide voltage range. As examples, curves 362, 363 and 364 in FIG. 13 illustrate outputs at 4V, 3.6V, and 3.3V respectively. Since these load voltages fall within the Lilon battery's normal discharge voltage range of 4.2V to 3V, a converter must regulate in step-down mode with a voltage conversion ratio below unity at the beginning of the cell's discharge cycle, and in step-up mode with a conversion ratio above unity later as the cell voltage decays.

[0195] Curve 365 illustrates a 3V output, which theoretically should require only step-down conversion, but because of the aforementioned problem of dropout, a Lilon battery supplying a 3V output must cutoff above 3.2V, thereby wasting useful battery life. New generation Lilon cells under development may allow operation down to 2.7V, requiring up-down conversion for 2.7V outputs as shown by curve 366. At a 2.5V battery condition, dropout issues may also require the use of an up-down converter even to supply a regulated 2.5V output, as shown by curve 367. If, however, up-down conversion results in a loss of efficiency exceeding the extra operating time gained by the extended battery range, then the user lifetime benefit of using a battery capable of lower voltage operation is lost entirely.

[0196] Similarly, dropout concerns make it difficult to guarantee a 1.8V regulated output from 2-cell-connected nickel-metal-hydride or nickel-cadmium, i.e. NiMH or NiCd, bat-

teries since those their outputs range from 2.4V down to 1.8V. Stopping usage at a 2V battery condition unacceptably wastes more than half the battery's charge life.

[0197] Another situation requiring an efficient low-dropout up-down converter is the use of a power supply designed to operate with two NiMH dry-cells, two alkaline cells, or a single-cell Lilon battery. Since the output voltage of a 2-series-cell NiMH battery pack ranges from 1.8V to 2.4V, the output voltage of 2-series-cell alkaline batteries ranges from 1.8V up to 3.4V during charging, and the output voltage of a single-cell Lilon battery ranges from 4.2V down to 3V or even 2.7V, any load voltage between 4.2V and 1.8V needs an up-down converter to maximize efficiency and battery life.

[0198] If we also consider that some systems allow the DC output from the AC/DC wall adapter to be connected without a battery present, the input voltage supplied to a system's DC/DC converter input can be considerably higher than if the battery were present, and may reach as high as 6.5V. When the battery is present and the charger disconnected, the input voltage may be as low as 1.8V. In such cases, every output voltage represented by curves 361 to 368 in FIG. 13, i.e., ranging from 5V down to a 1.8V output, requires an up-down converter.

[0199] Today most electrical loads are supplied by an up-only or down-only converter, where the battery is cut off prematurely to avoid requiring up-down conversion, even at the expense of wasting usable stored charge in a battery. Up-down conversion is therefore avoided at any cost except in extreme situations. With the poor efficiency, mode switching, noise glitches, regulation dropout, and poor regulation offered by existing up-down solutions, be they DC/DC converters, charge pumps, or linear regulators, a requirement for up-down conversion and regulation is extremely problematic and cannot meet the needs of today's efficiency-focused consumer marketplace.

A New DC/DC Converter Topology

[0200] The new non-isolated DC/DC converter and voltage regulation topology described herein is capable of operating over a wide range of voltage conversion ratios ranging from step-up to step-down conversion without the need for mode switching. Free from mode switching and dropout problems when $V_{out} \approx V_{in}$, the converter does not suffer from noise glitches, poor regulation, and instability, even near unity input-to-output voltage conversion ratios. While the regulator includes switched-inductor operation, it avoids the minimum pulse width problem plaguing conventional switching regulators at very high and very low duty factors, including regulator dropout, narrow pulses and associated high-current spikes, variable frequency operation, inadequate time to perform break-before-make transitions. In contrast, prior-art non-isolated DC/DC converters suffer from one or more of the aforementioned problems at extreme duty factors, and their use near unity voltage conversion ratios remains problematic.

[0201] The method and apparatus of this invention can be used in applications requiring up-down conversion, and avoid the problems of existing Buck-boost and flyback converters. While preferred embodiments of this invention specifically address the implementation of up-down converters, variants include improved down-only regulating converters and DC/DC inverters capable of producing negative, i.e. below ground, supply voltages.

[0202] Collectively, the new DC/DC converters disclosed herein comprise three new converter topologies and variants thereof, referred to herein by acronym as

[0203] LCDU—switched-inductor-capacitor down-up converter

[0204] LCDD—switched-inductor-capacitor down-down converter

[0205] LCDI—switched-inductor-capacitor down-inverting converter (inverter)

[0206] Specifically this invention focuses on switched-inductor-capacitor regulating converters comprising an inductive step-down pre-regulator feeding a switched-capacitor implemented step-up, step-down, or inverting post-converter. As a matter of nomenclature, the first L in the acronym represents the energy storage element, i.e. the coil or inductor, in the first stage of the regulator, or pre-regulator. The C represents the energy storage element in the post-converter or second stage of the converter. The third character “D” in the converter’s name indicates that the pre-regulator steps the input or battery voltage down and feeds the stepped-down voltage to the post-converter.

[0207] The last character refers to the direction of post-converter-up, down or inverting. Hence, the acronyms LCDU, LCDD, or LCDI, respectively. Since the post-converter stage varies by application, this new switched-inductor-capacitor family of DC/DC converter topologies can be collectively described as LCDX regulating converters, the X referring to a variable U for up, D for down, and I for inverting, respectively.

[0208] Related U.S. application No. [Attorney Docket No. MTI-21-DS-US], titled “High-Efficiency DC/DC Voltage Converter Including Up Inductive Switching Pre-Regulator and Capacitive Switching Post-Converter,” filed contemporaneously herewith and incorporated herein by reference, describes switched-inductor-capacitor (LC) converters comprising a switched inductive step-up type pre-regulator followed by a switched-capacitor step-down, step-up, or inverting post-converter. Collectively these LCUX type regulating converters include the following:

[0209] LCUD—switched-inductor-capacitor up-down converter

[0210] LCUU—switched-inductor-capacitor up-up converter

[0211] LCUI—switched-inductor-capacitor up-inverting converter (inverter)

[0212] Related U.S. applications Nos. [Attorney Docket No. AATI-20-DS-US], titled “High-Efficiency DC/DC Voltage Converter Including Capacitive Pre-Converter and Up Inductive Switching Post-Regulator,” and [Attorney Docket No. AATI-22-DS-US], titled “High-Efficiency DC/DC Voltage Converter Including Capacitive Pre-Converter and Down Inductive Switching Post-Regulator,” each of which is filed contemporaneously herewith and incorporated herein by reference, describe switched-capacitor-inductor (CL) regulating converters, where pre-conversion is achieved by a switched-capacitor stage and post-regulation is accomplished by a switched-inductor method.

Switched-Inductor-Capacitor (LCDX) Regulating Converters

[0213] FIG. 14A illustrates a schematic circuit diagram of a switched LCDX regulating converter 400 comprising a step-down, switched-inductor pre-regulator 401 supplying a voltage V_x as an input to a switched-capacitor charge-pump post-

converter 402 with a conversion ratio n , where the output voltage V_{OUT} is further used as a feedback voltage V_{FB} to control the operating condition and output of the pre-regulator 401. The output voltage V_x of the pre-regulator 401 is thereby dynamically adjusted to a voltage that optimizes the efficiency of the nX charge-pump converter 402 while simultaneously producing a well-regulated output at a desired voltage V_{OUT} .

[0214] In converter 400 the switched-inductor pre-regulator 401 comprises a PWM controller 406, a break-before-make gate buffer 405, a high-side P-channel power MOSFET 417, a low-side N-channel synchronous rectifier power MOSFET 403 with an intrinsic PN diode 404, and an inductor 418. An optional filter capacitor 407 is connected across the output of pre-regulator 401 to reduce ripple and improve transient response. In this embodiment of the invention, the step-down switched-inductor pre-regulator 401 is topologically configured as a synchronous Buck converter, although any step-down switched-inductor DC/DC converter may be used. For example N-channel MOSFET 403 may be eliminated and diode 404 replaced by a Schottky rectifier to implement a Buck converter in lieu of the synchronous Buck converter shown.

[0215] PWM controller 406 controls the on-time of high-side P-channel MOSFET 417 by varying the duty factor D in response to its feedback input, operating at a fixed frequency ϕ as determined by a ramp-clock/oscillator 413. Alternatively, PWM controller 406 may operate at a variable frequency with either a fixed or variable on-time for P-channel MOSFET 417.

[0216] Whenever P-channel MOSFET 417 is on, current flows from input power source V_{batt} through inductor 418. The coil is thereby magnetized, storing energy in an amount equal to $\frac{1}{2}LI^2$ and resisting any rapid changes in current. Compared to the switching frequency ϕ , current in inductor 418 cannot react to the rapid switching of MOSFET 417, so that inductor 418 behaves as a nearly lossless current source, whose average current changes slowly, over many clock cycles in response to pulse width modulation controlled by PWM circuit 406.

[0217] Whenever high-side MOSFET 417 is not conducting, inductor 418 drives the voltage at node V_x below ground, forward biasing diode 404 and allowing current in inductor 418 to flow uninterrupted, i.e. to recirculate. With both MOSFETs 403 and 417 turned off, the power dissipated in diode 404 is $I_L \cdot V_f$ where V_f is the forward voltage of P-N junction diode 404. N-channel synchronous rectifier MOSFET 403 conducts all or some portion of the time during which P-channel MOSFET 417 is off, shunting the current in diode 404 and redirecting the recirculation current through the channel of low-side MOSFET 403. Since MOSFET 403 only conducts when rectifier diode 404 is conducting, it operates as a “synchronous” rectifier. During conduction, the voltage drop across the synchronous rectifier is given by $I_L \cdot R_{DS(on)}$ and its instantaneous power dissipation is $I_L^2 \cdot R_{DS(on)}$.

[0218] Break-before make (BBM) buffer 405 insures that high-side power MOSFET 417 and low-side power MOSFET 403 never conduct simultaneously to prevent shoot-through conduction. Shoot-through conduction is an undesirable condition leading to wasted power and a loss in efficiency, and potentially resulting in MOSFET device damage. While the BBM intervals must be sufficiently long to prevent shoot-through, excessively long BBM intervals are, however, also

undesirable since they force diode **404** to carry current for longer times and to dissipate more power.

[0219] Except for the BBM period, synchronous rectifier MOSFET **403** ideally should be turned on and conducting whenever high-side MOSFET **417** is off. In some circumstances, however, it may be advantageous to turn off synchronous rectifier MOSFET **403** prematurely or not to turn it on at all. For example at very low output currents, unwanted oscillations and reverse current flow may occur if MOSFET **403** is left on for an extended duration. Shutting MOSFET **403** off disables channel conduction, and diode **404** under a reverse-bias condition prevents reverse current conduction, improving the converter's light load efficiency.

[0220] Alternatively, as described in application No. [Attorney Docket No. AATI-18-DS-US], titled "Low-Noise DC/DC Converter With Controlled Diode Conduction," filed contemporaneously herewith and incorporated herein by reference in its entirety, the synchronous rectifier MOSFET may remain on but controlled in a manner to limit the magnitude of its drain current, when it is not being operated as a fully-on device. By alternating between a resistive switch state and a low-current constant-current mode, the method reduces electrical noise in switched-inductor converters.

[0221] Intermediate voltage V_y , the output of the switched-inductor pre-regulator **401**, then supplies the power input to a charge pump **408** within switched-capacitor post-converter **402**, which also includes a reservoir capacitor **411**. Charge pump **408** converts this input voltage V_y to an output voltage nV_y , using a switched-capacitor network with flying capacitors **409** and (optionally) **410**. The conversion ratio nX of charge pump **408** may be step-up, step down, and inverting. Step-up conversion in the post-converter of a switched LCDU converter may comprise, for example, a single-capacitor doubler, $n=2$, or a dual-capacitor fractional implementation, $n=1.5$.

[0222] The output of the charge pump **408**, filtered by reservoir capacitor **411**, supplies a load **412** with a regulated voltage V_{out} . In a preferred embodiment, this output is used to provide feedback to the pre-regulator **401** with a feedback signal V_{FB} which is converted by level shifter **414** to a voltage used to control PWM circuit **406**. Alternatively, the intermediate voltage V_y can be used as a feedback signal to control PWM circuit **406**. As will later be shown, the value of V_y produced by the pre-regulator circuit **401** is important in setting the overall efficiency of DC/DC converter **400**.

[0223] In a preferred embodiment, the output voltage of level shifter **414** should force the value of V_y to a voltage equal to V_{out}/n . In the case of the LCDU converter **400**, level shifter **414** comprises a network of two resistors **415** and **416** acting as a voltage divider. In LCDD and LCDI inverters an alternative circuit can be employed for level shifting, as described below. PWM circuit **406** includes an error circuit whereby the output voltage of level shifter **414** is compared against a reference voltage and the result of the comparison is used to control the switching MOSFETs **403** and **417**. For example, as shown in FIG. 14B, the output voltage V_{FBin} from level shifter **414** may be compared in an error amplifier **406A** against a reference voltage V_{ref} generated by a band-gap generator **406B**, and the error signal generated by error amplifier **406A** may in turn be compared to an oscillating ramp signal in a comparator **406C**. Comparator **406C** generates a digital output which is fed through a flip-flop circuit **406D** and a BBM buffer **405** to control the switching of MOSFETs **403** and **417** and in particular the duty factor of MOSFET **417**. In

this example, level shifter **414** is constructed such that when V_{out} is at the target level, the error amplifier **406A** produces an output which maintains the duty factor constant. Conversely, when V_{out} is either above or below its target value, error amplifier **406A** produces a output which causes the comparator **406C** to reduce or increase the duty factor at which high-side MOSFET **417** is operating such that $V_y = V_{out}/n$. For a further description of alternative feedback circuitry in DC/DC converters, see U.S. Pat. No. 6,580,258 to Wilcox et al., issued Jun. 17, 2003, which is incorporated herein by reference in its entirety.

[0224] Another feature of LCDX converter **400** is the use of clock/oscillator **413** to control the switching of MOSFETs **417** and **403** in pre-regulator **401** as well as the switching elements in charge pump **408**. By synchronizing the switched-inductor pre-regulator **401** and switched-capacitor post-converter **402**, the size of intermediate filter capacitor **407** can be greatly reduced or in some cases, capacitor **407** may be eliminated altogether.

Regulating V_{out} through V_y Pre-Regulation

[0225] One novel aspect of the LCDX converter **400** is the dependence of its overall efficiency η on the value of intermediate voltage V_y , the output of the pre-regulator **401**. Another important consideration is the way the voltage V_y is controlled with closed loop feedback to improve the converter's transient regulation.

[0226] To better understand these considerations, behavioral model **420** of FIG. 15A can be used for control analysis and for estimating efficiency. As shown, step-down pre-regulator **401** is powered from input voltage V_{in} , producing an intermediate voltage V_y . In the LCDX topology, the pre-regulator **401** operates as a step-down converter, given by

$$V_y = D \cdot V_{in}$$

where D is the duty cycle of the high side MOSFET, ranging between 0% and 100%. This down conversion is illustrated graphically in FIG. 15B, where V_{out} versus V_{in} chart **426** of a switched LCDU 3.3V regulator illustrates that the battery input voltage V_{batt} **427** results in a constant V_y voltage of 1.65V shown by line **428**.

[0227] Referring again to FIG. 15A, the V_y output of the pre-regulator **401**, in turn, powers switched-capacitor post-converter **402**, outputting a voltage V_z . The conversion ratio of the post-converter **402** is given by

$$V_z = n \cdot V_y$$

or expressed as a voltage conversion ratio V_z/V_y , for post-converter **402**, the ratio equals

$$\frac{V_z}{V_y} = n$$

where n has discrete, quantized values, e.g., $n=\{2, 1.5, 0.5, -0.5, -1.0\}$, depending on the number of capacitors and the switch configuration in the charge pump **408**. For example as shown in FIG. 15B if $n=2$, the step-up post-converter **402** doubles the V_y intermediate voltage **428** to a constant 3.3V V_{out} shown by line **429**.

[0228] Referring again to FIG. 15A, the input voltage source **421** powers the entire LCDX converter. This power source may represent the output of any power supply but commonly comprises a Lilon battery. In the case of a battery, the cell voltage V_{batt} is substantially equal to V_{in} except in the

event of high-current transients when some voltage drop may occur inside the battery pack, further exemplifying the need for regulating voltage converters.

[0229] As shown, the output of the switching LCDX regulator powers a load 425, operating at a voltage V_{out} , the desired output voltage of the regulator. The parasitic lossy element 424 is included schematically to model the impact of a voltage mismatch between the output V_z of the post-converter 402 and the load's desired supply voltage V_{out} . Assuming that the output voltage V_z of post-converter 402 is substantially the same as the desired output voltage V_{out} , then the voltage ΔV across lossy parasitic element 424 is negligible, and $V_{out} \approx V_z$. Combining the above equations, yields the relation

$$V_{out} \approx V_z = n \cdot V_y = n \cdot D \cdot V_{in}$$

[0230] The voltage conversion ratio of a LCDX converter is then given by

$$\frac{V_{out}}{V_{in}} = nD$$

[0231] From this relation, we can make the important observation for the LCDX converter 400 that the product of the duty-factor D of its pre-regulator 401 and the ratio “ n ” of its post-converter 402 equals the output to input ratio of converter 400. In essence, to properly regulate and output, the duty factor D , the conversion ratio n , or both must be varied dynamically to compensate for changes in input voltage.

[0232] Using a $2\times$ post-converter, i.e. a doubler, as an example, the LCDX converter transfer equation specifically becomes

$$\frac{V_{out}}{V_{in}} = 2D$$

[0233] The conversion ratio of this $2\times$ -type LCDU converter voltage is illustrated by the dashed line in FIG. 15B and by line 434 in FIG. 15C. In FIG. 15B the dashed curve varies above and below unity, having a magnitude ranging roughly between 0.67 to over 1.5. At point 430, i.e. where $V_{in} = 3.3V$, the voltage conversion ratio is unity, and the converter is operating at the edge between step-up and step-down conversion. Notice that the LCDU converter 400 passes through this unity conversion condition without ever changing operating modes.

[0234] Further analyzing the $2\times$ -type LCDU converter, graph 432 of FIG. 15C illustrates that the voltage conversion ratio of converter 400 is linearly dependent on its duty factor D , shown by line 434, having twice the slope of line 433 describing only the output to input ratio of pre-regulator 401. While theoretically the converter is able to regulate output voltages ratios from zero to twice the input voltage, operation below 10% and above 90% duty factors is complicated by the need for narrow on or off pulses which are difficult to control. Instead, even by limiting the converter to duty factors ranging from 10% to 90%, the output voltage of the $2\times$ LCDU converter covers a wide range, from a minimum step-down factor 0.2 times the input to a maximum step-up factor 1.8 times the input—a voltage conversion range twice that of a Buck converter.

[0235] At a unity conversion ratio of converter 400, the duty factor of the pre-regulator 401 is only 50%. At only a 50% duty factor, a switching converter can easily be implemented for operation at high frequencies without being limited by problematic extremes in duty factor suffered by conventional Buck, boost, and Buck-boost converter topologies.

[0236] Operation of the LCDX converter 400 for other factors of n is considered below. An LCDU regulator containing a doubling or $2\times$ -type post-converter is included here as an example.

Controlling V_y for Maximum Converter Efficiency

[0237] The overall efficiency of the LCDX converter 400 can also be estimated using behavioral model 420 shown in FIG. 15B. For pre-regulator 401, input power is given by $P_{in1} = I_{in} \cdot V_{in}$ while $P_{out1} = I_y \cdot V_y$. The efficiency of the pre-regulator 401 can then be expressed as

$$\eta_1 = \frac{P_{out1}}{P_{in1}} = \frac{I_y \cdot V_y}{I_{in} \cdot V_{in}}$$

[0238] FIG. 15D illustrates that the efficiency η_1 of pre-regulator 401 is relatively constant and independent of its voltage conversion ratio V_y/V_{in} . Typical values range from 96% to 90%, depending on operating conditions, power MOSFET resistance and operating currents.

[0239] The post-converter 402, including charge pump 408, typically has a maximum efficiency in the range of 96% when delivering power to a load operating at its output voltage V_z . Since a charge pump is simply a converter and not a regulator, an analysis of its efficiency must consider the case when there is a mismatch between its output and the desired voltage needed to power an electrical load. Specifically, if for any reason, the output V_z of post-converter 402 is different from the desired output voltage V_{out} (e.g., if the output voltage is clamped by the load), the voltage error $\Delta V = V_z - V_{out}$ is no longer negligible and an additional loss of efficiency will result. This ΔV mismatch results in a loss that has the same mathematical form $\Delta V/V_{in}$ as the losses in a linear regulator, even though lossy element 424 is not really regulating voltage per se. Specifically the loss may be defined as

$$P_{loss3} = I_{out} \cdot \Delta V = I_{out} (V_z - V_{out})$$

where $V_z > V_{out}$. The efficiency of the third stage, related to the lossy component, is then given by

$$\eta_3 = \frac{P_{out}}{P_z} = \frac{P_z - P_{loss3}}{P_z} = \frac{I_{out} (V_z - V_{out})}{I_{out} \cdot V_z} = \frac{V_{out}}{V_z}$$

and where $V_{out} \leq V_z$, i.e. the maximum theoretical efficiency is limited to 100%. From the converter transfer function $V_z = n \cdot V_y$, then

$$\eta_3 = \frac{V_{out}}{V_z} = \frac{V_{out}}{nV_y}$$

[0240] Together with the internal efficiency of the charge pump 408, post-converter 402 has an efficiency given by

$$\eta_{CP} = \eta_2 \eta_3 = \eta_2 \frac{V_{out}}{V_z} = \frac{\eta_2}{n} \frac{V_{out}}{V_y}$$

[0241] This efficiency equation of post-converter **402**, including ΔV load mismatch, is illustrated in FIG. 15E, where the post-converter's voltage conversion ratio V_{out}/V_y is plotted against its efficiency η_{CP} in graph **437** for both ideal and real quiescent currents shown by curves **438** and **439**, respectively. In both cases the efficiency of the post-converter reaches its peak value when V_{out}/V_y equals the conversion ratio "n", i.e. when $V_{out}=n \cdot V_y$.

[0242] For example, in a doubler where $n=2$, the maximum output voltage of the LCDU converter occurs when $V_{out}=2V_y$. Any deviation in V_y from that condition reduces the LCDU converter's overall efficiency.

[0243] In the ideal case (curve **438**), quiescent operating current I_{Q2} is substantially zero in the charge pump **408** and its peak theoretical efficiency approaches 100%. In a real charge pump, some energy is lost operating the charge pump, its quiescent current I_{Q2} is not zero and the peak efficiency is limited to less than 100%, specifically to some value η_2 , typically 95 to 97% as shown by curve **439**.

[0244] Since the charge pump **408** cannot produce an output voltage greater than "n" times its input, the efficiency for V_{out}/V_y ratios above n is not meaningful, but it does describe the shortfall of the charge pump output voltage V_z from meeting the desired output voltage V_{out} . The curve shown as dashed line **440** is symmetrical with curve **439** about the condition $V_{out}/V_y=n$. It is included here for completeness.

[0245] From the converter transfer function $V_z=n \cdot V_y=n \cdot D \cdot V_{in}$, the efficiency can be re-expressed in terms of duty factor D rather than in terms of the intermediate voltage V_y . Accordingly the efficiency impact of the ΔV mismatch can be described as

$$\eta_3 = \frac{V_{out}}{V_z} = \frac{V_{out}}{nDV_{in}}$$

and the efficiency of charge pump **408** can be described as

$$\eta_{CP} = \eta_2 \eta_3 = \eta_2 \frac{V_{out}}{V_z} = \frac{\eta_2}{nD} \frac{V_{out}}{V_{in}}$$

[0246] The total efficiency of LCDX converter **400** is then the product of the individual efficiencies, i.e.

$$\eta = \eta_1 \cdot \eta_2 \cdot \eta_3 = \left(\eta_1 \cdot \eta_2 \frac{1}{nD} \right) \frac{V_{out}}{V_{in}}$$

[0247] This overall efficiency of a 2x-type LCDU regulator is plotted in FIG. 15F, for a variety of duty factors, revealing that the peak efficiency occurs when $D=50\%$ and $n \cdot D=1$.

[0248] FIG. 15G illustrates the same expression plotted as duty factor D versus the V_{out}/V_{in} voltage conversion ratio for lines of constant η_3 efficiency. As shown, lines **452A** through **452E** represent the duty factor dependence for η_3 efficiencies of 100%, 90%, 80%, 70% and 60% respectively. Specifically,

line **452** describes the duty factor where the 2xLCDU converter exhibits maximum efficiency for any given V_{out}/V_{in} conversion ratio. For example, point **453** indicates that the maximum efficiency occurs when $D=50\%$ for a unity transfer characteristic, i.e. when $V_{out}=V_{in}$. The optimum duty factor D is over 50% for step-up conversion, and below 50% for step-down conversion.

[0249] The overall efficiency of the converter is the product of $\eta_1 \cdot \eta_2 \cdot \eta_3$, where η_1 represents the efficiency of switched-inductor pre-regulator **401**, η_2 represents the efficiency of switched-capacitor post-converter **402**, and η_3 accounts for a mismatch between the output V_z of converter **400** and the desired output voltage V_{out} . Even when $V_{out}=V_z$ and $\eta_3=100\%$, the maximum converter efficiency is limited to $\eta_1 \cdot \eta_2$ and cannot reach a 100% efficiency. Typically, η_1 is in the ninety percentile range, and an optimized charge pump can exhibit a nearly constant $\eta_2=97\%$. The converter's total efficiency, i.e. the $\eta_1 \cdot \eta_2 \cdot \eta_3$ product, is shown by curve **454** for $\eta_3=100\%$. As predicted, for each V_{out}/V_{in} voltage conversion ratio a single duty factor D exists that optimizes the efficiency of the LCDU converter.

[0250] If for some reason it was determined to drive the output V_z of converter **400** slightly above the desired output V_{out} , i.e. where $V_z > V_{out}$, then the η_3 efficiency and the total converter efficiency η will suffer. This condition is illustrated for $\eta_3=90\%$ by a duty factor curve **452B** and a corresponding efficiency curve **455**.

[0251] FIG. 15H is a plot of the efficiency of an LCDU converter containing a 2x-type post-converter as a function of the duty factor D and the voltage conversion ratio V_{out}/V_{in} , assuming $\eta_1 \cdot \eta_2=100\%$. Curve **456** illustrates the efficiency at unity conversion, i.e. where $V_{out}=V_{in}$. Curve **456** also illustrates that the 2xLCDU converter reaches its peak efficiency at $D=50\%$ and for duty factors above 50% the efficiency declines hyperbolically, indicating the converter is producing a higher voltage than required, resulting in a ΔV mismatch between the converter and the desired load voltage, i.e. where $\Delta V = \{V_z - V_{out}\} > 0$.

[0252] Curves **457A** through **457E** describe the duty factor dependence of overall efficiency at V_{out}/V_{in} conversion ratios of 0.9, 0.7, 0.5, 0.3 and 0.1, respectively. Like the case at a unity conversion ratio, increased duty factors result in declining efficiency, meaning the output of the converter is higher than required. Similarly, curves **458A** through **457E** describe the overall efficiency at V_{out}/V_{in} conversion ratios of 1.1, 1.3, 1.5, 1.7 and 1.9 respectively. Notice for curve **458E**, only a single point remains where the pre-regulator exhibits a duty factor $D=95\%$, and a conversion ratio of 1.9 results.

[0253] Clearly it is important that the converter maintains operation in its high efficiency region of operation by controlling the duty factor D through the use of feedback control techniques, specifically to maintain an adequate but not excessive duty factor. Without feedback, open loop operation could easily suffer loss of efficiency as well as degraded regulation. Insufficient duty factors result in an output voltage that is too low; when the duty factor is too high, the efficiency is degraded.

[0254] Real efficiencies are lower than the curves shown in FIG. 15H because $\eta_1 \cdot \eta_2 < 100\%$, i.e. in reality, some power is lost in the switched-inductor pre-regulator **401** and in the switched-capacitor post-converter **402**. These effects are included in the graph of FIG. 15I, where the maximum efficiency **463C**, the product of $\eta_1 \cdot \eta_2$, is shown together with a semi-constant η_2 curve **463A** and a η_1 curve **463B**, showing a

slight dependence on duty factor D . As in the prior graph, the greatest deviation from the maximum efficiency occurs from excessive duty factors, over-pumping the converter's output V_z in excess of the desired voltage V_{out} .

[0255] As shown, curve 460 illustrates the unity transfer characteristic where $V_{out}=V_{in}$. Below this line, curves 461A through 461E describe step-down conversion for voltage conversion ratios of 0.9, 0.7, 0.5, 0.3 and 0.1 respectively. Above curve 460, curves 462A through 462E describe a step-up converter with output-to-input voltage ratios of 1.1, 1.3, 1.5, 1.7 and 1.9 respectively. The 2 $\times$ type LCDU converter cannot exceed a step up ratio of 2, and in practice should not be used above step up ratios of 1.8 to 1.9 to avoid narrow pulses.

[0256] Properly controlled, the switching LCDU regulator of this invention can produce a well regulated output in either step-up or step-down modes without exhibiting any mode changes, narrow pulse, or dropout effects near unity voltage conversion ratios, i.e. when $V_{out}=V_{in}$. The LCDU regulator is able to operate over a range of output to input voltage ratios far beyond that of a Buck converter, boost converter or charge pump. Assuming a practical limitation on duty factor ranges between 10% and 90%, Table 2 compares the usable range of voltage conversion ratios of the LCDU regulator to those of a charge pump doubler, Buck converter, and boost converter.

TABLE 2

Converter Topology	Range of V_{out}/V_{in}	Range of Efficiency	Unity Ratio Efficiency
2X Charge Pump	0.1 to 0.9	Above 1.8	Poor, $\eta < 50\%$
Boost Converter	1.1 to 15	Good up to ~ 4	Dropout above 0.9
Buck Converter	0.1 to 0.9	Good over range	Dropout below 1.1
2X LCDU	0.1 to 1.9	Good over range	Good, $\eta > 90\%$

[0257] As shown in FIG. 16, despite its high efficiency characteristic 466, a Buck converter operating at a 10% to 90% duty factor is only capable of step-down conversion ratios, i.e. where $V_{out}=\{0.1V_{in} \text{ to } 0.9V_{in}\}$. Conversely, the efficiency of a 2 $\times$ charge pump (curve 467) is high only for conversion ratios exceeding 1.8. In contrast, the efficiency of an LCDU converter (curve 468) is high over a wide range of voltage conversion ratios, i.e. where $V_{out}=\{0.1V_{in} \text{ to } 1.9V_{in}\}$. This result is unexpected, considering that the LCDU regulator combines elements of the charge pump and the Buck converter, yet regulates over a much wider range of operating conditions than either of them.

[0258] An example of a switched LCDU regulating converter in operation is illustrated in FIG. 17, where the voltage of a single-cell Lilon battery is used to generate a regulated 3.3V output during the entire battery discharge cycle. After charging, the cell voltage starts at 4.2V and then decays during interval 471 to around 3.5V to 3.6V, where the voltage remains during most of the discharge cycle (curve 472). Later, curve 473 illustrates that the battery voltage decays below 3.5V into a range $\{V_{out}<V_{batt}<(V_{out}+\delta)\}$ between lines 477 and 478, a condition where a normal converter would suffer dropout or mode switching problems. Finally in the region represented by curve 474, the battery voltage is well below the 3.3V output of the converter. Only specialized Lilon batteries 475 can operate down to 2.7V without growing crystallites that short out the cell.

[0259] Regardless of the Lilon cell voltage, the LCDU converter steps the battery voltage down by duty factor D to a constant pre-regulated voltage V_y , shown by curve 476, then

steps the voltage back up by 2 $\times$ in the charge pump post-converter to produce a regulated 3.3V output V_{out} (curve 477). The converter's condition can be described as shown in Table 3:

TABLE 3

Phase	Up/Down	V_{batt}	D	V_y	nX	V_{out}	V_{out}/V_{in}
470. Full charge	Down	4.2 V	39%	1.65 V	2X	3.3 V	0.52
471. Decay	Down	3.6 V	46%	1.65 V	2X	3.3 V	0.92
472. Plateau	Down	3.5 V	47%	1.65 V	2X	3.3 V	0.94
473. $V_{batt} \approx V_{out}$	Unity	3.3 V	50%	1.65 V	2X	3.3 V	1.00
474. Discharged	Up	3.0 V	55%	1.65 V	2X	3.3 V	1.10
475. Extend Range	Up	2.7 V	61%	1.65 V	2X	3.3 V	1.22

[0260] One common application using a single cell Lilon battery and requiring a 3.3V regulated supply is a cell phone. No present day regulator is able to operate with high efficiency over the battery's entire voltage range. Handset designers today must employ step-down-only Buck regulators that cut off around 3.5V, thereby throwing away the battery life in discharge phases 475, 474, 473 and a portion of voltage-plateau-phase 472, because the added use-life of these later phases of discharge is completely compensated by the efficiency loss of a conventional Buck-boost converter.

Switched-Inductor-Capacitor Down-Up (2 $\times$ LCDU) Regulating Converters

[0261] FIG. 18 illustrates a schematic circuit diagram of a doubler-type switched LCDU regulating converter 480.

[0262] As shown, the LCDU switching converter 480 includes a high-side power MOSFET 481, a low-side N-channel synchronous rectifier 483 with an intrinsic P-N diode 484 and an inductor 482. These elements are included in a pre-regulator 480A, converting an input voltage V_{batt} to an intermediate voltage V_y . The voltage V_y , across an optional filter capacitor 485 forms the input to a 2 $\times$ -type charge pump post-converter 480B, comprising power MOSFETs 486, 487, 488 and 489 together sequentially charging and discharging a flying capacitor 490 from pre-regulator 480A into an output filter capacitor 491.

[0263] High-side configured power MOSFETs 481, 487, and 488, along with floating power MOSFET 489 may be either N-channel or P-channel devices, with appropriate changes in the gate drive signal and gate buffer circuitry. Low-side power MOSFETs 483 and 486 are preferably implemented as N-channel devices. Output voltage V_{out} is used as a feedback signal V_{FB} , scaled by level shift resistors 496 and 497 to produce a voltage as a control input to an error amplifier within PWM controller 493. This control voltage is chosen to force the output of the pre-regulator 480A to an intermediate voltage V_y having a magnitude equal to one-half of the magnitude of the output voltage V_{out} .

[0264] PWM controller 493, synchronized to a clock and ramp generator circuit 494, switches at a clock frequency (and drives a break-before-make (BBM) buffer 492 at the same frequency. BBM buffer 492 drives high-side MOSFET 481 and synchronous rectifier MOSFET 483 out of phase with gate biases V_{G1} and V_{G2} to prevent shoot-through conduction. The polarity of V_{G1} is positive with respect to the source of MOSFET 481 if MOSFET 481 is an N-channel device, and negative if MOSFET 481 is a P-channel device. Synchronous rectifier MOSFET 483 is controlled to conduct

all or some portion of the time when MOSFET 481 is off, but never to conduct significant current when MOSFET 481 is on.

[0265] The clock signal controlling PWM controller 493 also controls BBM buffer 495, producing gate signals V_{GS3} , V_{GS4} , V_{GS5} and V_{GS6} to control the sequenced switching of charge pump MOSFETs 487, 486, 488, and 489, respectively. These MOSFETs conduct in diagonal fashion, with MOSFETs 488 and 486 conducting while MOSFETs 487 and 489 are off so as to charge capacitor 490; and then MOSFETs 487 and 489 conducting while MOSFETs 486 and 488 are off so as to discharge capacitor 490 by transferring its charge onto reservoir capacitor 491. BBM buffer 495 prevents shoot-through conduction between MOSFETs 487 and 486, and also between MOSFETs 488 and 489.

[0266] The MOSFETs in post-converter 480B may be switched synchronously to those in pre-regulator 480A at the frequency ϕ or at some higher multiple of the clock frequency, i.e. $m\phi$, or alternatively at a frequency independent of the clock frequency used to switch MOSFETs 481 and 483 in pre-regulator 480A. In a preferred embodiment, all of the power MOSFETs in pre-regulator 480A and charge pump post-converter 480B are switched in synchronous fashion whereby filter capacitor 485 can be made small or may be eliminated. In contrast, if the clock frequency used to switch charge pump post-converter 480B is independent of the clock frequency used to switch pre-regulator 480A, capacitor 485 is required to temporarily store energy needed to support momentary load and line transients.

[0267] Synchronous operation of the pre-regulator 480A and post-converter 480B in 2 $\times$ -type LCDU converter 480 is illustrated in FIGS. 19A and 19B. In FIG. 19A schematic diagram 500 represents converter 480 during magnetizing of inductor 482 and the simultaneous charging of flying capacitor 490, with current flowing from V_{batt} through on-state MOSFETs 481, 488 and 486 and during which time V_x is biased to V_{batt} , V_w is grounded, V_z is biased to V_y , and flying capacitor 490 charges to a voltage $+V_y$. Off MOSFET 483 is represented by reversed bias diode 484. Off MOSFETs 487 and 489 are represented by open circuits 504 and 506 respectively.

[0268] In FIG. 19B, schematic diagram 520 represents LCDU converter 480 during the recirculation of current through inductor 482 and the discharge of flying capacitor 490. During this time, an inductive recirculation current flows through forward-biased diode 484, shunted by on-state MOSFET 483, and through MOSFETs 487 and 489, charging output capacitor 491. During recirculation, the voltage V_x is biased near, but slightly below ground, specifically within a diode's forward bias V_f of ground.

[0269] By connecting the negative terminal of capacitor 490 to voltage $V_w = V_y$ and its positive terminal to the output, the voltage V_z instantly jumps to $2V_y$, driving the output voltage V_{out} across output capacitor 491. In this state, high-side MOSFET 481 is represented by reverse-biased P-N diode 481. Off MOSFETs 488 and 486 are represented by open circuits 528 and 526.

[0270] To summarize the operation of the switched-inductor pre-regulator 480A and switched-capacitor post-converter 480B, a first terminal of the inductor 482 is coupled to a first voltage (V_{batt}) during a first time interval and to a second voltage (ground) during a second time interval. During the first time interval, inductor 482 is magnetizing and during the second time interval the current is recirculating through inductor 482. This cycle is repeated, and as a result of the

electric characteristics of inductor 482 an intermediate voltage (V_y) is produced at a second terminal of inductor 482. The first time interval as a percentage of the total time of each cycle defines the duty factor of pre-regulator 480A. The intermediate voltage V_y is a percentage of V_{batt} , which percentage is determined by the duty factor. Normally, the first and second time intervals are separated by a break-before-make (BBM) interval.

[0271] As for the charge pump within post-converter 480B, during a third time interval a first terminal of the flying capacitor 490 is coupled to a the intermediate voltage (V_y) and a second terminal of capacitor 490 is coupled to a third voltage (ground). During the third time interval, capacitor 490 charges to approximately the intermediate voltage (V_y). During a fourth time interval the second terminal of capacitor 490 is coupled to the intermediate voltage (V_y) and the first terminal of capacitor 490 is coupled to the output terminal of the charge pump. During the third time interval capacitor 490 is charging, and during the fourth time interval capacitor 490 is discharging. Normally, the third and fourth time intervals are separated by a BBM interval.

[0272] Pre-regulator 480A and post-converter 480B can be operated synchronously such that the first and third time intervals overlap and the second and fourth time intervals overlap. If so, the first terminal of inductor 482 is coupled to the first voltage (V_{batt}) during all or at least part of the time that the capacitor 490 is charging, and the first terminal of the inductor 482 is coupled to the second voltage (ground) during all or at least part of the time that the capacitor 490 is discharging.

[0273] It is understood that in some embodiments there may be additional components (e.g., resistors) in the pre-regulator and/or post-converter. The word "coupled," as used herein, is intended to indicate that the components referenced above may be connected to the voltages specified through the additional components, if any.

[0274] In an alternative embodiment shown in schematic diagram 540 of FIG. 20, 2 $\times$ post-conversion can be eliminated by discontinuing the switching of the charge pump MOSFETs and turning on both MOSFET 488 and 489 so that $V_y \approx V_z \approx V_{out}$, the voltage across output capacitor 491. During this operating condition, MOSFET 487 is biased off, represented here as open circuit 545. With MOSFETs 486 and 488 biased on, V_w is grounded and V_z is connected to V_y , pre-charging capacitor 490 to $+V_y$, essentially in parallel with output capacitor 491. MOSFETs 481 and 483 with parallel diode 484 continue to switch under PWM control to regulate the voltage at node V_y . This condition may be considered a charge pump bypass mode.

Other LCDX Switching Regulators

[0275] As stated previously, an LCDX switching regulator exhibits an output-to-input voltage conversion ratio governed by the equation

$$\frac{V_{out}}{V_{in}} = nD$$

where n has discrete, quantized values, e.g., $n = \{2, 1.5, 0.5, -0.5, -1.0\}$, depending on the number of capacitors and the switch configuration and where D is dynamically adjusted using feedback to maximize the converter's overall efficiency.

[0276] Various topologies of LCDX converters of this invention are illustrated in FIGS. 21A-21D, in simplified form. For example, a 2xLCDU converter 570 in FIG. 21A employs a single-capacitor 2x-type charge pump 576 to produce an output given by the relation $V_{out}=2DV_{batt}$, where D is dynamically adjusted through feedback to force the converter to operate at or near its optimum efficiency.

[0277] Feedback using a doubler-type charge-pump post-converter requires only a resistor divider comprising resistors 581 and 582 to adjust the signal for the PWM converter's control input. The output voltage V_{FB} is twice the magnitude of the desired voltage V_y . The feedback divider may utilize equal size resistors to divide the output signal in half as an input to the PWM controller V_{FBin} .

[0278] For present purposes, the feedback input voltage V_{FBin} to the PWM controller is defined as the voltage that will cause the PWM controller will try to force V_y to a voltage equal to $V_{out}/2$, i.e. so under closed loop control $V_y \rightarrow V_{out}/2$.

[0279] The disclosed LCDX family of converters may also utilize a step-up fractional charge pump in place of a doubler. Fractional LCDU converter 590 in FIG. 21B employs a dual-capacitor 1.5x-type charge pump 596 to produce an output given by the relation $V_{out}=1.5DV_{batt}$, where D is dynamically adjusted through feedback to force the converter to operate at or near its optimum efficiency. The feedback from the converter's output to the V_{FBin} pin is scaled, i.e. level shifted, by a network of resistors 600 and 601 so that under closed loop control $V_y \rightarrow (V_{out}/1.5)$.

[0280] The relationship between duty factor D and the voltage conversion ratio V_{out}/V_{in} of various LCDX converters is illustrated in graph 630 of FIG. 22, with the characteristics of a 2x-type LCDU converter (curve 632) and a 1.5x-type LCDU converter (curve 633) contrasted with those of a Buck converter (curve 631). While the Buck converter must reach a 100% duty factor to achieve a unity voltage conversion ratio, the 2x-type LCDU converter achieves this condition at 50% duty factor, i.e. at a duty factor of $D=1/n$ where $n=2$.

[0281] It follows that the fractional LCDU converter described by curve 633 where $n=1.5$ achieves unity conversion at a duty factor of $D=2/3$ or 67%. At a 50% duty factor its conversion ratio is given by $n:D=1.5(50\%)$ so that $V_{out}=0.75V_{in}$. Compared to the 2x type LCDU converter where $V_{out}=V_{in}$ at a 50% duty factor, the 1.5x-type LCDU regulator supplies a lower output voltage at the same duty factor.

[0282] At high frequencies, where operation near a 50% duty factor is preferable to avoid narrow pulses, the 1.5x-type LCDU regulator is preferable over the doubler type when delivering lower output voltages. For example delivering a 3.0V output from a Lilon battery charged to 4.2V, a doubler-type LCDU regulator must operate at a 35% duty factor while the 1.5x-type LCDU regulator operates at a 48% duty factor. Operating near a 50% duty factor allows higher-frequency switching than operation at extreme duty factors.

[0283] Another version of the LCDX converter utilizes a step-down fractional charge pump, where the output voltage of the charge-pump post-converter is equal to, for example, one-half its input voltage. In such a case, both the pre-regulator and post-converter stages perform a step-down function. The resulting converter can be referred to as a down-down or LCDD switching converter. For example, fractional LCDD converter 610 in FIG. 21C employs a dual-capacitor 0.5x-type charge pump 616 to produce an output given by the relation $V_{out}=0.5DV_{batt}$, where D is dynamically adjusted through feedback to force the converter to operate at or near its optimum efficiency.

[0284] The feedback from the converter's output to the V_{FBin} pin is scaled by a level shifting circuit to the desired voltage V_y , so that under closed loop control $V_y \rightarrow (V_{out}/0.5)$. Since the level shifted feedback signal V_{FBin} may higher than V_{FB} , not lower, a level shift circuit containing active transistor devices may be required in place of the passive resistor voltage-divider network of LCDU converters 570 and 590. Examples of active level shift feedback networks are described below.

[0285] While 1.5x-type fractional LCDU converter 590 offers similar benefits to 2x-type LCDU converter 570 by performing both step-up and step-down conversion without the need for mode switching and without suffering dropout, the benefit and motivation for 0.5x-type LCDD converter 610 is different. As a step-down only converter it should be compared to the Buck converter in its operating characteristics and not against LCDU down-up converters.

[0286] Because of its $V_{out}=0.5DV_{batt}$ transfer characteristic, LCDD converter 610 is able to output a lower voltage at any given duty cycle than an equivalent Buck converter. This characteristic is evidenced by graph 630 in FIG. 22 by comparing curve 634 for the LCDD converter against curve 631 for a Buck converter. For example, at a 50% duty cycle, a 0.5x-type LCDD regulates its output voltage at 25% of its input voltage while a Buck converter's output voltage is equal to 50% of its input voltage.

[0287] To generate a 0.9V output from a Lilon battery having a nominal voltage of 3.6V, a voltage conversion ratio of 0.25, the LCDD regulator can operate at $D=50\%$ while the Buck converter must modulate at $D=25\%$. Under the high battery condition when $V_{batt}=4.2V$, the Buck converter must regulate at a 21% duty factor while the 0.5x-type LCDD converter is still operating at a relatively high 42% duty ratio.

[0288] Table 4 contrasts the $D=50\%$ preferred conversion ratio for a 2xLCDU converter, a 1.5xLCDU converter, a Buck converter, and a 0.5xLCDD converter and illustrates the duty factor range needed to output several common output voltages from a Lilon battery.

TABLE 4

Condition				
	2X LCDU	1.5X LCDU	Buck	0.5X LCDD
D = 50%	$V_{out}/V_{in} = 1.00$	$V_{out}/V_{in} = 0.67$	$V_{out}/V_{in} = 0.50$	$V_{out}/V_{in} = 0.25$
Lilon $\rightarrow$ 3.3 V	40% < D < 55%	53% < D < 73%	N/A	N/A
Lilon $\rightarrow$ 3.0 V	36% < D < 50%	47% < D < 67%	71% < D < 100%*	N/A
Lilon $\rightarrow$ 2.7 V	32% < D < 45%	43% < D < 60%	64% < D < 90%	N/A

TABLE 4-continued

	Condition			
	2X LCDU $V_{out}/V_{in} = 1.00$	1.5X LCDU $V_{out}/V_{in} = 0.67$	Buck $V_{out}/V_{in} = 0.50$	0.5X LCDD $V_{out}/V_{in} = 0.25$
D = 50%				
Lilon $\rightarrow$ 1.8 V	21% < D < 30%*	29% < D < 38%	43% < D < 60%	N/A
Lilon $\rightarrow$ 0.9 V	10% < D < 15%*	14% < D < 20%*	21% < D < 30%*	42% < D < 60%

[0289] Those conditions marked with an asterisk (*) may require limiting the converter's operating frequency in order to meet the full range in required duty factors. Those marked with N/A require both step-up and step-down conversion, not possible with a Buck or a down-down converter.

Fractional Down-Up (LCDU) and Down-Down (LCDD) Regulating Converters

[0290] FIG. 23A illustrates schematic diagram of a fractional 1.5x-type LCDU regulating converter 650.

[0291] A step-down pre-regulator 650A comprises a PWM controller 668; a clock 667; a BBM buffer 670; a high-side power MOSFET 651; an N-channel synchronous rectifier MOSFET 652 with an intrinsic P-N diode 653; an inductor 654; and an optional filter capacitor 655. Powered from the V_y output of the pre-regulator, a fractional charge pump post-converter 650B comprises a high-side MOSFET 656, a middle MOSFET 657 and a low-side MOSFET 658 with flying capacitors 663 and 664. The discharge path comprises output connected MOSFETs 661 and 662 connected to output capacitor 665 and V_y connected MOSFETs 659 and 660.

[0292] Grounded MOSFETs 652 and 658 are N-channel devices. The remaining devices may comprise either N-channel or P-channel MOSFETs with appropriate modification to the gate drive polarity and circuitry. The charge pump MOSFETs are controlled by a BBM buffer 666, circuitry ideally synchronized to the same clock 667 controlling pre-regulator MOSFETs 651 and 652. The output V_{out} , having a voltage 1.5 times V_y , is used to control PWM circuit 668 via feedback V_{FB} . The V_{FB} signal is appropriately level shifted by resistors 669A and 669B to produce a V_{FBin} signal equal to a voltage equal to $V_{out}/1.5$, the desired voltage V_y for optimum converter efficiency. In alternative embodiments, BBM buffer 666 need not be driven by PWM 668, but preferably the MOSFETs in the post-converter 650B are turned on simultaneously with the MOSFETs in the pre-regulator 650A.

[0293] FIG. 23B illustrates the equivalent circuit 680 of converter 650 during the cycle when inductor 654 is magnetized and capacitors 663 and 664 are charged, during which time MOSFETs 651, 656, 657, and 658 are conducting and all other MOSFETs are off. During this cycle, series connected capacitors 656 and 664 each charge to a voltage $V_y/2$.

[0294] FIG. 23C illustrates the equivalent circuit 690 of converter 650 in the next phase when the inductor current re-circulates and the flying capacitors 663 and 664 transfer their charge onto output capacitor 665. In this phase MOSFETs 651, 656, 657 and 658 are shut off, and MOSFET 652 is turned on shunting a significant portion of inductor recirculation current from forward-biased diode 653. The positive terminals of flying capacitors 663 and 664 are shorted together and connected to output capacitor 665 through on MOSFETs 661 and 662. The negative terminals of capacitors

663 and 664 are shorted together and connected to voltage V_y by on MOSFETs 659 and 660.

[0295] In this discharge phase, capacitors 663 and 664 are therefore connected in parallel, each being previously charged to a voltage $V_y/2$. By attaching the negative terminals of these flying capacitors to the V_y terminal, the voltage at their positive terminals connected to the output is the sum of V_y and $0.5V_y$ for a total output voltage of $+1.5V_y$ relative to ground.

[0296] FIG. 24A illustrates a schematic circuit diagram of a fractional 0.5x-type LCDD regulating converter 700, also referred to herein as a "down-down" converter. A step-down pre-regulator 700A comprises a PWM controller 717; a clock 716; a BBM buffer 706; a high-side power MOSFET 701; an N-channel synchronous rectifier MOSFET 703 with an intrinsic P-N diode 704; an inductor 702; and an optional filter capacitor 705. Powered from the V_y output of pre-regulator 700A, a fractional charge pump post-converter 700B comprises MOSFETs 707 and 708, which are used to charge flying capacitors 709 and 710. The discharge path comprises output connected MOSFETs 712 and 713 connected to an output capacitor 714 and a ground-connected MOSFET 711. The negative terminal of capacitor 710 is hard wired to ground.

[0297] Grounded synchronous rectifier MOSFET 703 is an N-channel device. The remaining devices may comprise either N-channel or P-channel MOSFETs with appropriate modification to the gate drive polarity and circuitry. MOSFETs 707, 708, 712 and 713 within charge pump post-converter 700B are controlled by a BBM buffer 715, which ideally is driven by the same clock generator 716 that controls the switching of MOSFETs 701 and 703 within pre-regulator 700A. The output voltage V_{out} , equal to $+0.5$ times V_y , is used to control PWM controller 717 via a feedback voltage V_{FB} . The V_{FB} signal is appropriately level-shifted by a level shift circuit 719 to produce a V_{FBin} signal that drives the intermediate voltage V_y to a voltage equal to $V_{out}/0.5$, the desired level of V_y for optimum converter efficiency.

[0298] FIG. 24B illustrates the equivalent circuit 720 of converter 700 during the cycle when inductor 702 is magnetized and capacitors 709 and 710 are charged, during which time MOSFETs 701, 707, and 708 are conducting and all other MOSFETs are off. During this cycle, series connected capacitors 709 and 710 each charge to a voltage $V_y/2$.

[0299] FIG. 24C illustrates the equivalent circuit 725 of same circuit 700 in the next phase when the inductor current re-circulates and the flying capacitors 709 and 710 transfer their charge onto output capacitor 714. In this phase MOSFETs 701, 707, and 708 are shut off, and MOSFET 703 is turned on shunting a significant portion of inductor recirculation current from forward-biased diode 704. The positive terminals of flying capacitors 709 and 710 are shorted together and connected to output capacitor 714 through on

MOSFETs **712** and **713**. The negative terminal of capacitor **702** is connected to ground by turning on MOSFET **711**. The negative terminal of capacitor **710** is hard wired shorted to ground.

[0300] In this discharge phase, capacitors **709** and **710** are therefore connected in parallel, each being previously charged to a voltage $V_y/2$. By attaching the negative terminals of these flying capacitors to ground, the voltage at their positive terminals connected to the output is $0.5V_y$ relative to ground.

[0301] Thus the operation of the fractional charge pump is similar to the operation of a voltage-raising charge pump, described above, except that during the fourth time interval the second terminal of the capacitor is coupled to a fourth voltage instead of the second terminal of the inductor. The fourth voltage may be equal to the third voltage.

Inverting Switched-Inductor-Capacitor (LCDI) Regulating Converters (Inverter)

[0302] An LCDX switching regulator can also be used to generate an output voltage below ground, i.e. inverted. As stated previously, an LCDX switching regulator exhibits an output-to-input voltage conversion ratio governed by the equation

$$\frac{V_{out}}{V_{in}} = nD$$

where n has discrete, quantized values, e.g., $n=\{2, 1.5, 0.5, -0.5, -1.0\}$, depending on the number of capacitors and the switch configuration in the post-converter, and where D is dynamically adjusted using feedback to maximize the converter's overall efficiency. When n is negative, the output voltage of the converter is negative. A converter that generates a negative output voltage from a positive voltage input is referred to as an inverter, and using the aforementioned nomenclature is herein described as a LCDI switching regulator.

[0303] As illustrated in FIGS. **25A** and **25B**, various topologies of LCDI converters fall within the numerous embodiments of this invention. For example LCDI converter **740** in FIG. **25A** employs single-capacitor $-1\times$ type charge pump **746** to produce an output given by the relation $V_{out} = -DV_{batt}$ and where D is dynamically adjusted through feedback to force the converter to operate at or near its optimum efficiency.

[0304] Feedback using an inverting-type charge-pump post-converter requires an inverting level shifter to adjust the below ground signal into a positive value appropriate for the PWM converter's control input. The output voltage V_{FB} is equal to the magnitude of the desired voltage V_y , but opposite in polarity. The level shift circuit may invert the $-V_{FB}$ signal into $+V_{FB}$ for use as an input to the PWM controller V_{FBin} .

[0305] For present purposes, the feedback input voltage V_{FBin} to the PWM controller is defined as the voltage that will cause the PWM controller to force the intermediate voltage V_y to $-V_{out}$, i.e., under closed loop control $V_y \rightarrow (-V_{out})$. V_y is a positive voltage if V_{out} is a negative voltage.

[0306] The disclosed LCDI family of inverters may also utilize a inverting fractional charge pump. Fractional LCDI converter **760** in FIG. **25B** employs a dual-capacitor $-0.5\times$ type charge pump **766** to produce an output given by the

relation $V_{out} = -0.5DV_{batt}$, where D is dynamically adjusted through feedback to force the converter to operate at or near its optimum efficiency. The feedback from the converter's output to the V_{FBin} pin is scaled, i.e. level shifted, by a level shift circuit to force the intermediate voltage V_y to $-V_{out}/0.5$, i.e., under closed loop control $V_y \rightarrow (-V_{out}/0.5)$. V_y is a positive voltage if V_{out} is a negative voltage.

[0307] The relationship between the duty factor D and the voltage conversion ratio V_{out}/V_{in} of various LCDI converters is illustrated in graph **780** of FIG. **26**, including $-1\times$ LCDI (curve **782**) and the $-0.5\times$ type LCDI (curve **683**) characteristics contrasted to the positive polarity V_y signal **781** used in generating the negative supply. Specifically, the $-1\times$ type LCDX converter has a characteristic which is a mirror image of V_y . Specifically when $D=50\%$, the $-1\times$ LCDI switching regulator produces a voltage regulated output where $V_{out} = -0.5V_{batt}$. At low duty factors, the output approaches zero while at high duty factors, e.g. at 90%, the output approaches $-V_{batt}$.

[0308] It follows that the fractional LCDI converter is described by line **783** where $n=-0.5$. At 50% duty factor the $-0.5\times$ LCDI conversion ratio is given by $nD=-0.5(50\%)$ so that $V_{out} = -0.25V_{in}$. Compared to the $-1\times$ type LCDI converter where $V_{out} = -0.5V_{in}$ at a 50% duty factor, the $-0.5\times$ type LCDI regulator supplies a smaller negative output voltage at the same duty factor.

[0309] At high frequencies where operation near 50% duty factor is preferable to avoid narrow pulses, the $-0.5\times$ type LCDI regulator is preferable over the $-1\times$ inverter type when delivering smaller negative output voltages. For example delivering a $-0.9V$ output from a Lilon battery charged to $4.2V$, a $-1\times$ LCDI regulator must operate at 21% duty factor while the $-0.5\times$ type LCDI regulator operates at 42%. Operating near 50% duty factor allows higher-frequency switching than operation at extreme duty factors.

[0310] Table 5 contrasts the $D=50\%$ preferred conversion ratio for the $-1\times$ LCDI and $-0.5\times$ LCDI converters and illustrates the duty factor range needed to output several negative output voltages from a Lilon battery.

TABLE 5

	Condition		
	$-0.5\times$ LCDU $V_{out}/V_{in} = -0.25$	$-1\times$ LCDU $V_{out}/V_{in} = -0.50$	Buck (Positive) $V_{out}/V_{in} = 0.50$
$D = 50\%$			
Lilon $\rightarrow 3.0V$	N/A	$71\% < D < 100\%*$	$71\% < D < 100\%*$
Lilon $\rightarrow 2.7V$	N/A	$64\% < D < 90\%$	$64\% < D < 90\%$
Lilon $\rightarrow 1.8V$	N/A	$43\% < D < 60\%$	$43\% < D < 60\%$
Lilon $\rightarrow 0.9V$	$42\% < D < 60\%$	$21\% < D < 30\%*$	$21\% < D < 30\%*$

[0311] Those conditions marked with an asterisk (*) may require limiting the converter's operating frequency in order to meet the full range in required duty factors. Those marked with N/A require both step-up and step-down inversion.

[0312] Examining the implementation of the LCDX-type inverters in greater detail, FIG. **27A** illustrates a circuit diagram of a $-1\times$ switched LCDI regulating converter **790**. As shown, LCDI switching converter **790** includes a high-side power MOSFET **791**, a low-side N-channel synchronous rectifier MOSFET **792** with an intrinsic P-N diode **793** and an inductor **794**. These elements are included in a pre-regulator **790A** converting an input voltage V_{batt} to an intermediate voltage V_y . The intermediate voltage V_y across an optional

filter capacitor **795** forms the input to a $-1\times$ type charge pump inverting post-converter **790B** comprising power MOSFETs **796**, **797**, **798** and **799** together sequentially charging and discharging a flying capacitor **800** from pre-regulator **790A** into the an output filter capacitor **801**.

[0313] High-side configured power MOSFETs **791**, **796**, and **798** may be either N-channel or P-channel devices, with appropriate changes in the gate drive signal and gate buffer circuitry. Low-side power MOSFETs **792**, **797** and **799** are preferably implemented as N-channel devices. Output voltage V_{out} is used as feedback signal V_{FB} , inverted by a level shift circuit **802** to produce a positive voltage as the control voltage input to an error amplifier within PWM controller **804**. This control voltage is chosen to force the output voltage of pre-regulator **790A**, across optional or parasitic capacitor **795**, to a voltage V_y , having a magnitude equal to but the inverse of the output voltage V_{out} .

[0314] PWM controller **804** is driven by a clock and ramp generator circuit **805** at a clock frequency ϕ and drives a break-before-make buffer **806** at the same frequency. BBM buffer **806** drives high-side MOSFET **791** and synchronous rectifier MOSFET **792** out of phase with gate biases V_{G1} and V_{G2} to prevent shoot-through conduction. The polarity of V_{G1} is positive with respect to the source of MOSFET **791** if it is an N-channel device, and negative if MOSFET **791** is a P-channel device. Synchronous rectifier MOSFET **792** is controlled to conduct all or some portion of the time when MOSFET **791** is off, but never to conduct significant current when high-side MOSFET **791** is on.

[0315] The clock signal controlling PWM controller **804** also controls BBM buffer **803**, producing gate signals V_{G53} , V_{G54} , V_{G55} and V_{G56} to control the sequenced switching of charge pump MOSFETs **796**, **797**, **798**, and **799**, respectively. These MOSFETs conduct in diagonal fashion, with MOSFETs **796** and **799** conducting while MOSFETs **797** and **798** are off so as to charge capacitor **800**; and with MOSFETs **798** and **797** conducting while MOSFETs **796** and **799** are off so as to discharge capacitor **800** by transferring its charge onto output filter capacitor **801**. BBM buffer **803** prevents shoot-through conduction between MOSFETs **796** and **797**, and also between MOSFETs **798** and **799**.

[0316] The MOSFETs **796-799** within charge pump post-converter **790B** may be switched synchronously to the pre-regulator clock at the frequency ϕ or at some higher multiple of the clock frequency, i.e. $m\phi$, or alternatively at a frequency independent of the clock frequency ϕ . In a preferred embodiment, all the power MOSFETs in pre-regulator **790A** and charge pump post-converter **790B** are switched in synchronous fashion whereby filter capacitor **795** can be made small or may be eliminated. In contrast, if the MOSFETs within charge pump post-converter **790B** are switched independently of the MOSFETs within pre-regulator **790A**, capacitor **795** is required to temporarily store energy needed to support momentary load and line transients.

[0317] Synchronous operation of pre-regulator **790A** and post-converter **790B** in $-1\times$ type LCDI converter **790** is illustrated in FIGS. 27B and 27C. In FIG. 27B schematic diagram **810** represents converter **790** during the magnetizing of inductor **794** and simultaneous charging of the flying capacitor **800**, with current flowing from V_{batt} through on-state MOSFETs **791**, **796** and **797** and during which time V_x is biased to V_{batt} . V_z is grounded, V_w is biased to V_y , and flying capacitor **800** charges to a voltage $+V_y$. Off MOSFETs **792**, **797**, and **798** behave as open circuits and are not shown.

[0318] In FIG. 27C schematic diagram **820** represents converter **790** during the recirculation of current through inductor **794** and discharging of flying capacitor **800**. During this time, an inductive recirculation current flows through forward-biased diode **793** shunted by on-state MOSFET **792**, and through MOSFETs **797** and **798**, charging output capacitor **801**. During the recirculation stage, V_x is near, but slightly below ground, specifically within a diode's forward bias V_f of ground.

[0319] By connecting the positive terminal of capacitor **800** to ground and its negative terminal to the output, the voltage on V_z instantly jumps to $-V_y$, the inverse of the intermediate voltage V_y , driving the output voltage V_{out} across output capacitor **801**. In this state, high-side MOSFET **791** and charge pump MOSFETs **796** and **799** are represented by open circuits.

[0320] Thus the operation of the inverter is similar to the operation of an voltage-raising charge pump, described above, except that during the fourth time interval the first terminal of the capacitor is coupled to ground instead of the output terminal and the second terminal of the capacitor is coupled to the output terminal of the inverter instead of the intermediate voltage. The second and/or third voltages may also be ground.

[0321] FIG. 28A illustrates a fractional $-0.5\times$ LCDI regulating converter **840**, also referred to herein as a fractional inverter. A step-down pre-regulator **840A** comprises a PWM controller **837**; a clock generator **859**; a BBM buffer **860**; a high-side power MOSFET **841**; an N-channel synchronous rectifier MOSFET **842** with an intrinsic P-N diode **843**; an inductor **844**; and an optional filter capacitor **845**. Powered by the intermediate voltage V_y , provided by pre-regulator **790A**, the inverting fractional charge pump post-converter **790B** comprises MOSFETs **846**, **847** and **848** which charge flying capacitors **849** and **850**. The discharge path comprises output-connected MOSFETs **853** and **854**, which are connected to an output capacitor **855**, and ground-connected MOSFETs **851** and **852**.

[0322] Grounded synchronous rectifier MOSFET **842** is an N-channel device. The remaining devices may comprise either N-channel or P-channel MOSFETs with appropriate modification to the gate drive polarity and circuitry. The MOSFETs in charge pump post-converter **790B** are controlled by a BBM buffer **856**, which is ideally driven by the same clock generator **859** that controls MOSFETs **841** and **842** in pre-regulator **840A**. The output voltage V_{out} , being equal to -0.5 times the intermediate voltage V_y , is used to control a PWM circuit **857** via a feedback voltage V_{FB} . V_{FB} is appropriately level-shifted by a level-shift circuit **858** to produce a V_{FBin} signal that drives the intermediate voltage V_y to $-V_{out}/0.5$, the desired voltage V_y for optimum converter efficiency.

[0323] FIG. 28B illustrates an equivalent circuit **870** of converter **840** during the cycle when inductor **844** is magnetized and capacitors **849** and **850** are charged, during which time MOSFETs **846**, **847**, and **848** are conducting and all other MOSFETs are off. During this cycle, series-connected capacitors **849** and **850** each charge to a voltage $+V_y/2$.

[0324] FIG. 28C illustrates an equivalent circuit **875** of converter **840** in the next phase when the inductor current re-circulates and the flying capacitors **849** and **850** transfer their charge onto output capacitor **855**. In this phase, MOSFETs **841**, **846**, **847**, and **848** are shut off, and MOSFET **842** is turned on, shunting a significant portion of inductor recir-

culation current from forward-biased diode **843**. The negative terminals of flying capacitors **849** and **850** are shorted together and connected to output capacitor **855** through on MOSFETs **853** and **854**. The positive terminals of capacitors **849** and **850** are connected to ground by turning on MOSFETs **851** and **852**.

[0325] In this discharge phase, capacitors **849** and **850** are therefore connected in parallel, each of capacitors **849** and **850** being previously charged to a voltage $+V_y/2$. By attaching the positive terminals of these flying capacitors to ground, the voltage at their negative terminals which are connected to the output terminal is equal to $-0.5V_y$ relative to ground, i.e. a negative fractional output.??

Feedback Implementation

[0326] In the LCDX switching regulator circuits described herein, a key feature to operating near peak efficiency requires that the output of the pre-regulator be biased near V_{out}/n where “n” is the nX multiplier of the charge pump post-converter. While this condition could be met in an open-loop circuit, superior line and load regulation requires the converter to react to changes in the operating conditions dynamically and rapidly, i.e. in real time. Feedback of the converter’s output voltage using closed loop control is commonly used in voltage regulators to achieve accurate regulation performance.

[0327] Specifically, in the LCDX family of regulators shown, the switched-inductor pre-regulator provides the regulation feature, with pulse widths preferably near a 50% duty factor, while the charge pump post-converter scales this output for up-down conversion or inversion. Because the voltage range of the output is scaled up, down, or inverted into a different voltage range than the V_y output of the pre-regulator, any feedback signal V_{FB} coming from the converter’s V_{out} must be adjusted, i.e. level shifted, before it can be fed into the V_{FBin} input of the PWM controller. Alternatively the output of the pre-regulator V_y can be used as feedback to force the voltage at V_y to a particular value needed to produce the required output voltage V_{out} at the maximum converter efficiency.

[0328] As defined previously in FIG. 15A, regardless of the feedback method, the feedback should drive V_y to a voltage such that error voltage $\Delta V = V_{out} - V_z$ is small so that the condition

$$V_{out} \approx V_z = nV_y = n \cdot D \cdot V_{in}$$

is maintained. Several methods to dynamically adjust the duty factor D of the pre-regulator’s PWM controller exist including deriving feedback from V_{out} , V_y , or some combination thereof. The examples shown here are illustrative but not intended to be limiting as to the various methods to achieve closed-loop control of LCDX regulators.

[0329] As shown in feedback circuit **890** in FIG. 29A, a PWM controller **893** includes an error amplifier implemented as a differential-input operational amplifier, with its inverting input constituting the feedback input V_{FBin} and its non-inverting input tied to a reference voltage generator **895**, which generates a reference voltage V_{ref} . Feedback control occurs by controlling the pulse width and inductor current such that whenever the V_{FBin} input is less than V_{ref} the converter reacts by increasing pulse-width and switch on-time, increasing average inductor current, and driving V_{out} to a higher voltage. Conversely, whenever the V_{FBin} input is greater than V_{ref} the

converter reacts by decreasing pulse-width and shortening switch on-time, reducing average inductor current, and driving V_{out} to a lower voltage.

[0330] While the actual value of V_{ref} may be determined by a band-gap voltage reference circuit operating at 1.2V, the reference voltage may in some implementations be scaled to the desired output voltage of the pre-regulator, i.e. V_y , as shown in FIG. 29A. In practice, either the input V_{FBin} can be divided down to the value of V_{ref} or conversely V_{ref} can be multiplied up to match the $V_y \approx V_{FBin}$ value. Both cases are considered in the following discussion.

[0331] Referring again to FIG. 29A, in a 2x-type LCDU switching regulator, feedback V_{FB} from the output V_{out} has a voltage twice that of the pre-regulator output voltage V_y . To properly level shift this voltage to a value near V_y , a simple resistor divider comprising two resistors **891** and **892** of equal value R easily performs the level shift function. As such

$$V_{FBin} = V_{FB} \left(\frac{R_1}{R_1 + R_2} \right) = +2V_y \left(\frac{R_1}{R_1 + R_2} \right) \equiv +V_y$$

[0332] From this relation for a 2x-type LCDU regulator, it is obvious divider $R_1/(R_1 + R_2)$ must equal $1/2$. If however the reference voltage is not scaled to V_y , but instead only $V_{bandgap} = 1.2V$ then the resistor ratio must be adjusted so that

$$V_{FBin} = V_{FB} \left(\frac{R_1}{R_1 + R_2} \right) = +2V_y \left(\frac{R_1}{R_1 + R_2} \right) \equiv V_{bandgap}$$

[0333] In such a case the resistor ratio divides the feedback signal by $1.2V/2V_y$ or $1.2V/V_{out}$, not by one-half.

[0334] In FIG. 29B, a feedback circuit **900** uses resistor divider comprising resistors **901** and **902** for a 1.5x-type fractional LCDU regulator, where the level shift using the relation $R_1 = 2R_2$ results in an V_{FBin} signal two-thirds that of the feedback voltage V_{FB} , namely

$$V_{FBin} = V_{FB} \left(\frac{R_1}{R_1 + R_2} \right) = +1.5V_y \left(\frac{R_1}{R_1 + R_2} \right) \equiv +V_y$$

[0335] If however the reference voltage is not scaled to V_y , but instead only $V_{bandgap} = 1.2V$ then the resistor ratio must be adjusted so that

$$V_{FBin} = V_{FB} \left(\frac{R_1}{R_1 + R_2} \right) = +1.5V_y \left(\frac{R_1}{R_1 + R_2} \right) \equiv V_{bandgap}$$

[0336] In such a case the resistor ratio divides the feedback signal by $1.2V/1.5V_y$ or $1.2V/V_{out}$ rather than by two-thirds.

[0337] Feedback for a 0.5x-type LCDD converter is more complex. If the voltage reference is an un-scaled band-gap 1.2V reference, then so long that $V_{FB} = 0.5V_y > V_{bandgap}$ then resistive level-shift circuit can be used and the feedback is given by

$$V_{FBin} = V_{FB} \left(\frac{R_1}{R_1 + R_2} \right) = +0.5V_y \left(\frac{R_1}{R_1 + R_2} \right) \equiv V_{bandgap}$$

[0338] If V_{ref} is scaled to equal the pre-regulator's output voltage V_y , then the feedback signal V_{FB} is less than the reference voltage, i.e. $V_{FB} < V_{ref}$ and a resistor divider network will not work. Instead then an active level shift circuit is needed.

[0339] A step-up level shift circuit 910 shown in FIG. 29C is an example of an active level shift circuit using a bipolar current mirror including NPN bipolar transistors 912 and 913, where the feedback voltage sets the current I_{C1} in NPN transistor 912 according to the relation $I_{C1} = (V_{FB} - V_{be1})/R_1$. The current I_{C2} in NPN mirror transistor 913 is then equal to the ratio of the emitter areas of the NPN mirror transistors 912 and 913 multiplied by I_{C1} , or $I_{C2} = m \cdot I_{C1}$ where m may for convenience be unity. The input voltage V_{FBin} to error amplifier 917 can then be adjusted to equal the voltage V_{ref} of reference voltage generator 918 by the ratio of the resistances of resistors 915 and 914. In this manner $V_{FBin} > V_{FB}$ and fluctuates in proportion to the output voltage.

[0340] An alternative implementation 930 shown in FIG. 29D uses MOSFETs instead of bipolar transistors, but operates under a similar principal where the feedback voltage sets the current I_{D1} in NMOS 938 according to the relation $I_{D1} = (V_{FB} - V_{GS1})/R_1$. The current I_{D2} in NMOS mirror transistor 932 is then equal to the ratio of gate widths of the NMOS mirror transistors 932 and 938 multiplied by I_{D1} , or $I_{D2} = m \cdot I_{D1}$ where m may for convenience be unity. The input voltage V_{FBin} to error amplifier 936 can then be adjusted to equal the voltage V_{ref} of reference 937 by the ratio of the resistances of resistors 933 and 934. In this manner $V_{FBin} > V_{FB}$ and fluctuates in proportion to the output voltage.

[0341] An active feedback circuit is also required for inverting LCDI regulators, specifically since the error amplifier operates in circuitry biased above ground but the feedback signal V_{FB} is below ground, i.e. negative, or vice-versa. One approach to implement a negative-to-positive level shift employs multiple current mirrors as shown in the feedback circuit 950 of FIG. 29E. In feedback circuit 950 the feedback signal is negative, i.e., $V_{FB} < 0$. This voltage establishes a collector current proportional to the feedback voltage in a current mirror NPN transistor 952 according to the relation $I_{C1} = (|V_{FB}| - V_{be1})/R_1$. The current I_{C2} in NPN mirror transistor 953 is then equal to the ratio of the emitter areas of transistors 952 and 953 multiplied by I_{C1} , or $I_{C2} = m_1 \cdot I_{C1}$ where m may for convenience be unity. Collector current I_{C2} is then mirrored in a PNP transistor 954 to establish a current I_{C3} in a mirror PNP transistor 955 sourced from a positive supply rail, in this example $+V_{batt}$. The current I_{C3} in PNP mirror transistor 955 is then equal to the ratio of the emitter areas of transistors multiplied by I_{C2} , or $I_{C3} = m_2 \cdot I_{C2}$; where m_2 may for convenience be unity, and combining equations yields $I_{C3} = m_1 \cdot m_2 \cdot I_{C1}$.

[0342] This mirror current is then converted to a positive feedback voltage V_{FBin} , the input to an error amplifier 960, using a resistor divider comprised of resistors 956 and 957 and an optional grounded NPN transistor 958, and V_{FB} is adjusted to be equal to the value of a reference voltage V_{ref} generated by a voltage reference generator 961. Assuming that the emitter area ratios $m_1 = 1$ and $m_2 = 1$ then $I_{C3} = I_{C1}$, that NPN transistor 958 is identical to NPN transistor 952, and

that resistors 957 and 951 are equal, i.e. $R_1 = R_2$, then V_{FBin} relative to ground is equivalent to the absolute value of the magnitude of the negative input voltage V_{FB} .

[0343] Feedback circuit 970 in FIG. 29F represents the CMOS equivalent of feedback circuit 950, with NMOS mirror transistors 972 and 973, PMOS mirror transistors 974 and 975 and a feedback voltage V_{FBin} delivered to an error amplifier 980, adjusted using resistors 976 and 977 to be equal to voltage V_{ref} generated by reference voltage generator 981 under nominal operating conditions. Specifically, if $I_{D1} = I_{D3}$, if NMOS transistors 972 and 978 are identical, and if $R_2 = R_1$, then the magnitude of V_{FBin} will equal the absolute value of the magnitude of negative feedback voltage V_{FB} , except that it is referenced to ground, i.e. represents a positive voltage.

[0344] A feedback circuit 1000, shown in FIG. 29G, can also be used for negative-to-positive level shifting whereby I_{D1} in an NMOS 1002 is mirrored by an NMOS 1003 and adjusted by resistors 1005 and 1004 to produce a positive feedback V_{FBin} to error amplifier 1007 at a voltage equal to V_{ref} of voltage reference 1008.

[0345] As shown, feedback circuits 950, 970 and 1000 may be used for both $-1 \times$ LCDI and fractional $-0.5 \times$ LCDI inverting voltage regulators, depending on resistor values.

[0346] In conclusion, FIG. 30A illustrates that an LCDX DC/DC converter 1040 utilizing closed loop feedback from V_{out} to a PWM controller 1050 requires a level shift circuit 1049. In contrast LCDX converter 1060, shown in FIG. 30B, utilizing feedback from the output V_y of the pre-regulator does not need any special level shifting of the feedback signal to a PWM controller 1069, except to adjust for the ratio of V_y to V_{ref} .

Power MOSFET Gate Drive in LCDX Regulators

[0347] FIGS. 31A-31F illustrate a variety of gate buffers driving the gates of various power MOSFETs used in the disclosed switched LCDX converters. The power MOSFET device conductivity type, i.e. N-channel or P-channel, and its associated gate drive circuitry can affect performance and efficiency and are therefore another consideration in optimizing an LCDX switching regulator.

[0348] High-side MOSFETs, i.e. those with one high-current terminal permanently tied to the battery voltage batt or the intermediate voltage V_y , may comprise either NMOS or PMOS devices. Such devices include MOSFETs 481, 487 and 488 in the LCDU converter 480 of FIG. 18. They may also be used for floating devices such as MOSFET 489.

[0349] In an inductive pre-regulator, for example, a high-side PMOS 1102 tied to the battery input as shown in circuit 1100 of FIG. 31A has its gate buffer 1101 powered by V_{batt} so that its gate-to-source voltage V_{GSP} ranges from $-V_{batt}$ to 0. PMOS 1102 as shown includes a source-body short forming anti-parallel P-N diode 1103 with its cathode connected to the transistor's source and with its anode tied to its drain. The diode 1103 remains reversed biased under normal operating conditions.

[0350] Similarly, in the charge-pump post-converter, a high-side PMOS 1112 tied to the intermediate voltage V_y , as shown in circuit 1110 of FIG. 31B has its gate buffer 1111 powered by V_y so that its gate-to-source voltage V_{GSP} ranges from $-V_y$ to 0. PMOS transistors benefit from their ease of gate drive but unfortunately exhibit on-state resistances two and half times larger than NMOS transistors for the same active device area. PMOS 1112 as shown includes a source-body short forming anti-parallel P-N diode 1113 with its

cathode connected to the transistor's source and with its anode tied to its drain. The diode **1113** remains reverse-biased under normal operating conditions.

[0351] In the case of a high-side power NMOS source-follower **1122** as shown in circuit **1120** of FIG. 31C, the gate drive must supply a voltage higher than the MOSFET's drain voltage and ideally should float with respect to the MOSFET's source so that a constant V_{GSN} can be applied regardless of the output voltage of the source follower.

[0352] One means to implement floating NMOS gate drive is bootstrap circuit **1120**, shown in FIG. 31C, where high-side NMOS **1122** is powered by a bootstrap capacitor **1124** and a floating gate buffer **1121** referenced to the source of NMOS **1122**. The bootstrap capacitor **1124** is charged through bootstrap diode **1125** from either V_{batt} or V_y whenever NMOS **1122** is off, i.e. when $V_{GSN}=0$, and its source is pulled near ground. In this state, bootstrap capacitor **1124** charges to a voltage $(V_{batt}-V_f)$ or (V_y-V_f) , depending on the supply input. V_f is the forward voltage of bootstrap diode **1125**. Bootstrap gate drive requires constant switching to operate properly or the voltage across bootstrap capacitor **1124** may sag and allow NMOS **1122** to inadvertently turn off.

[0353] When buffer **1121** drives the gate of NMOS **1122** on, capacitor **1124** holds NMOS **1122** in its on state while its source voltage rises to near V_{batt} . The positive terminal of bootstrap capacitor **1124** then rises to approximately $(2V_{batt}-V_f)$ or $(2V_y-V_f)$ above ground maintaining V_{GSN} at a constant gate drive $(V_{batt}-V_f)$ or (V_y-V_f) throughout the transition. The input signal controlling gate buffer **1121** is resistive level shift circuit **1126** comprising resistor **1127**, NMOS **1128** and gate buffer **1129** powered by V_{batt} .

[0354] An alternative implementation of a bootstrapped level shifted high side power NMOS circuit **1140** in FIG. 31D comprises power NMOS **1144**, floating gate buffer **1141**, bootstrap capacitor **1143** and bootstrap diode **1142** powered by V_y or V_{batt} and controlled by cross coupled level shift circuit **1145**. Unlike level shift **1126** of FIG. 31C, which exhibits static power dissipation in resistor **1127** whenever level shift NMOS **1128** is on, cross coupled level shift **1145** does not exhibit static power dissipation. It operates by inverter **1150** driving NMOS level shift transistors **1149** and **1150** out of phase pulling the gate of PMOS **1146** to ground and forcing the gate of **1147** to the bootstrap voltage, thereby latching the level shift circuit into a stable but non-conducting state.

[0355] Bootstrap drive circuits **1120** and **1140** may be used for any high side or floating NMOS utilized in the pre-regulator circuit or in the charge pump post-converter.

[0356] A special gate drive circuit may be used for driving floating or high-side NMOS in the charge pump post-converter. Since in any LCDX converter the first stage is a down converter, then it follows that $V_{batt} > V_y$. In the gate drive circuit **1160** of FIG. 31E, gate buffer **1161** powers the gate of NMOS **1162** whose drain is biased to pre-regulator output voltage V_y . Without using floating gate drive, buffer **1161** applies the voltage V_{batt} to the gate of NMOS **1162** regardless of its source voltage. Initially, at the onset of turn-on when NMOS **1162** is off, $V_{GSN}=V_{batt}$. After NMOS **1162** turns on and pulls up, the gate drive is diminished to an amount equal to $V_{GSN}=(V_{batt}-V_y)$. Since $V_y=D \cdot V_{batt}$ then the gate drive can be expressed as $V_{GSN}=V_{batt}(1-D)$.

[0357] Low side NMOS transistors such as transistors **483** and **486** in FIG. 18 are permanently connected to ground and do not require floating gate drive. NMOS **1182**, shown in FIG.

31F, is driven by gate buffer **1181** powered by input V_{batt} to minimize on-resistance. Notice also that low side NMOS **483** is used to recirculate inductor current and thereby forward biases PN diode **1183**, shunted by on NMOS **1182**.

[0358] While a number of embodiments of this invention have been described herein, it should be understood that these embodiments are illustrative, and not limiting, of the broad principles of this invention. Many alternative and additional embodiments within the broad principles of this invention will be apparent to persons of skill in the art from the descriptions herein.

I claim:

1. A DC/DC voltage converter comprising:

a step-down pre-regulator comprising a switched inductive circuit; and

a post-converter comprising a switched capacitive circuit, wherein an output terminal of the pre-regulator is coupled to an input terminal of the post-converter, an input terminal of the pre-regulator comprising an input terminal of the DC/DC voltage converter, an output terminal of the post-converter comprising an output terminal of the DC/DC voltage converter.

2. The DC/DC voltage converter of claim 1 further comprising a feedback path, a first terminal of the feedback path being coupled to the input terminal of the pre-regulator.

3. The DC/DC voltage converter of claim 2 wherein a second terminal of the feedback path is coupled to the output terminal of the post-converter.

4. The DC/DC voltage converter of claim 2 wherein a second terminal of the feedback path is coupled to the output terminal of the pre-regulator.

5. The DC/DC voltage converter of claim 1 wherein the pre-regulator comprises a high-side switch connected in a series path with a low-side switch and an inductor connected to a point in the series path between the high-side switch and the low-side switch.

6. The DC/DC voltage converter of claim 1 wherein the post-converter comprises a charge pump.

7. The DC/DC voltage converter of claim 1 wherein the pre-regulator comprises a Buck converter.

8. A method of converting a first DC voltage to a second DC voltage comprising:

providing at least one inductor and at least one capacitor; during a first time interval coupling a first terminal of the at least one inductor to the first DC voltage;

during a second time interval coupling the first terminal of the at least one inductor to a second voltage, thereby producing an intermediate voltage at a second terminal of the at least one inductor;

during a third time interval coupling a first terminal of the at least one capacitor to the intermediate voltage and coupling a second terminal of the at least one capacitor to a third voltage; and

during a fourth time interval coupling the second terminal of the at least one capacitor to the intermediate voltage and coupling the first terminal of the at least one capacitor to an output terminal, thereby providing the second DC voltage at the output terminal.

9. The method of claim 8 wherein the first and third time intervals overlap.

10. The method of claim 9 wherein the second and fourth time intervals overlap.

11. The method of claim 8 wherein the first time interval defines a duty cycle and the method further comprises using the second DC voltage to determine the duty cycle.

12. The method of claim 8 wherein the first time interval defines a duty cycle and the method further comprises using the intermediate voltage to determine the duty cycle.

13. The method of claim 8 wherein the first and second time intervals define a first cycle and the third and fourth time intervals define a second cycle, the method comprising clocking the first and second cycles synchronously.

14. A method of converting a first DC voltage to a second DC voltage comprising:

providing at least one inductor and at least one capacitor;
during a first time interval coupling a first terminal of the at least one inductor to the first DC voltage;
during a second time interval coupling the first terminal of the at least one inductor to a second voltage, thereby producing an intermediate voltage at a second terminal of the at least one inductor;
during a third time interval coupling a first terminal of the at least one capacitor to the intermediate voltage and coupling a second terminal of the at least one capacitor to a third voltage; and

during a fourth time interval coupling the second terminal of the at least one capacitor to a fourth voltage and coupling the first terminal of the at least one capacitor to an output terminal, thereby providing the second DC voltage at the output terminal.

15. The method of claim 14 wherein the first and third time intervals overlap.

16. The method of claim 15 wherein the second and fourth time intervals overlap.

17. The method of claim 14 wherein the first time interval defines a duty cycle and the method further comprises using the second DC voltage to determine the duty cycle.

18. The method of claim 14 wherein the first time interval defines a duty cycle and the method further comprises using the intermediate voltage to determine the duty cycle.

19. The method of claim 14 wherein the first and second time intervals define a first cycle and the third and fourth time intervals define a second cycle, the method comprising clocking the first and second cycles synchronously.

* * * * *