

Doc Code: **TR.PROV**

Document Description: Provisional Cover Sheet (SB16)

PTO/SB/16 (04-07)

Approved for use through 06/30/2010 OMB 0651-0032

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

Provisional Application for Patent Cover Sheet

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c)

Inventor(s)

Inventor 1

Remove

Given Name

Middle Name

Family Name

City

State

Country ;

Daniel

Danciu

Zurich

CH

All Inventors Must Be Listed – Additional Inventor Information blocks may be generated within this form by selecting the **Add** button.

Add

Title of Invention

NETWORK-BASED REMOTE CONTROL

Attorney Docket Number (if applicable)

1133-051USP1

Correspondence Address

Direct all correspondence to (select one):

☒ The address corresponding to Customer Number

☐ Firm or Individual Name

Customer Number

98449

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are:

Entity Status

Applicant claims small entity status under 37 CFR 1.27

- ☐ Yes, applicant qualifies for small entity status under 37 CFR 1.27
- ☒ No

Warning

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

Signature

Please see 37 CFR 1.4(d) for the form of the signature.

Signature	/Raymond R. Berdie/			Date (YYYY-MM-DD)	2010-11-08
First Name	Raymond R.	Last Name	Berdie	Registration Number (If appropriate)	50769

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. This form can only be used when in conjunction with EFS-Web. If this form is mailed to the USPTO, it may cause delays in handling the provisional application.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that : (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

NETWORK-BASED REMOTE CONTROL

TECHNICAL FIELD

[0001] The disclosure relates to techniques for controlling networked devices, such as personal computers, tablet computers, cellular telephones, televisions, and gaming consoles.

BACKGROUND

[0002] Various computing devices may be used to control a home electronic device such as a television, personal computer, tablet computer, stereo, or other computing device capable of outputting audio and/or video content. Remote controls typically communicate directly with the device being controlled. For example, a user may actuate buttons on the remote control, which causes the remote control to transmit a signal directly to the device being controlled. The device interprets the received signal and performs a corresponding action (e.g., altering the content being played on the device). For instance, a user may use a remote control to change the channel of a television.

[0003] In one conventional solution, a user may control the playback of video on a television via a web application displayed on the television using a keyboard and mouse. In another conventional solution, the user may pair a device that acts as a remote control directly with the device outputting the audio and video (e.g., a television or stereo), such that the device outputting the audio and video acts as a server to the remote control by, for example, communicating directly with the remote control and accepting incoming connections from the remote control.

SUMMARY

[0004] In general, this disclosure is directed to techniques for exchanging information between a networked device, such as a network-enabled television, and web-enabled device, such as a remote control, via a network service (e.g., a “cloud service”). In an example, the web-enabled device can transmit control information via the network service to the networked device to control playback of media content (e.g., audio and/or video content) on the networked device. In another example, the networked device can transmit information

via the network service to the web-enabled device, such as status information concerning the networked device.

[0005] In one example, the disclosure is directed to an article of manufacture comprising a computer-readable storage medium encoded with instructions for causing one or more programmable processors of a computing device to receive, by a server, a first message from a remote control, wherein the first message includes a remote control identifier that uniquely identifies the remote control, and wherein the first message further includes control information for controlling one or more functions of at least one device other than the remote control. The instructions also cause one or more programmable processors of the computing device to retrieve, by the server, at least one controlled device identifier from a data repository based on the remote control identifier, wherein the at least one controlled device identifier uniquely identifies at least one controlled device that is distinct from and external to the server. The instructions also cause one or more programmable processors of the computing device to send a second message from the server to the at least one controlled device identified by the at least one controlled device identifier, wherein the second message is based on the first message and includes the control information to control an operation of the at least one controlled device.

[0006] In another example, the disclosure is directed to a method that includes receiving a first message from a remote control, wherein the first message includes a remote control identifier that uniquely identifies the remote control, and wherein the first message further includes control information. The method also includes retrieving at least one controlled device identifier from a data repository based on the remote control identifier, wherein the at least one controlled device identifier uniquely identifies at least one controlled device. The method also includes sending a second message to the at least one controlled device identified by the at least one controlled device identifier, wherein the second message is based on the first message and includes the control information to control an operation of the at least one controlled device.

[0007] In another example, a computing device includes one or more processors, a data repository configured to store data, a means for receiving a first message from a remote control, and a device management module. The first message received by the means includes a remote control identifier that uniquely identifies the remote control, and the first message

further includes control information. The device management module retrieves at least one controlled device identifier from the data repository based on the remote control identifier, wherein the at least one controlled device identifier uniquely identifies at least one controlled device, and sends a second message to the at least one controlled device identified by the at least one controlled device identifier, wherein the second message is based on the first message and includes the control information to control an operation of the at least one controlled device.

[0008] The details of one or more examples of the disclosure are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the disclosure will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF DRAWINGS

[0009] FIG. 1 is a block diagram illustrating an example networked environment with a remote control and controlled device, in accordance with one aspect of the present disclosure.

[0010] FIG. 2 is a block diagram illustrating an example networked environment having remote controls and controlled devices, in accordance with one aspect of the present disclosure.

[0011] FIG. 3 is a block diagram illustrating an example remote control, which may be an example of the remote control shown in FIG. 1 or one of the remote controls shown in FIG. 2, in accordance with one aspect of the present disclosure .

[0012] FIG. 4 is a block diagram illustrating an example controlled device, which may be an example of the controlled device shown in FIG. 1 or one of the controlled devices shown in FIG. 2, in accordance with one aspect of the present disclosure.

[0013] FIG. 5 is a block diagram illustrating an example server, which may be an example of the server shown in FIG. 1, or included within the network shown in FIG. 2, in accordance with one aspect of the present disclosure.

[0014] FIG. 6 is a flowchart illustrating an example operation of a remote control communicating with a network server, in accordance with one aspect of the present disclosure.

[0015] FIG. 7 is a flowchart illustrating an example operation of a network server communicating with a remote control, in accordance with one aspect of the present disclosure.

[0016] FIG. 8 is a flowchart illustrating an example operation of a controlled device communicating with a network server, in accordance with one aspect of the present disclosure.

[0017] FIG. 9 is a flowchart illustrating an example operation of a network server communicating with a controlled device, in accordance with one aspect of the present disclosure.

DETAILED DESCRIPTION

[0018] Techniques of this disclosure relate to a network service or “cloud service” that acts as an intermediary between a remote control device and a controlled device. For example, the network service may receive commands from a remote control and transmit the commands to a controlled device. The network service may also receive commands or other information from the controlled device and transmit those commands or other information to the remote control. The remote control may include a remote control application executing on a mobile device, such as a cellular telephone or a tablet computer. The controlled device may include any Internet-connected device capable of receiving commands, such as an Internet-connected television, a set top box, a personal video recorder, a gaming console, or other networked device. In one aspect, the remote control and the controlled device may operate as simple Hypertext Transfer Protocol HTTP clients of the network service. That is, the controlled device does not operate as a server to the remote control. Thus, any HTTP-enabled device may operate as a remote control or as a controlled device.

[0019] In general, the remote control and the controlled device are configured to both listen for messages from the network service and send messages to the network service. In some examples, the network service controls pairing one or more remote controls and one or more controlled devices, receives information or commands from remote controls and controlled devices, and sends information or commands to remote controls and controlled devices. The network service may direct received information and commands to the appropriate devices based on pairing information maintained by the network service. A remote control may be

configured to send a message to a controlled device to perform a task, such as stopping playback of media content playing on the controlled devices or changing the media content playing on the controlled devices. To accomplish the task, the remote control first sends a message to the network service. The network service then determines the controlled device that is paired with the remote control and forwards the message to the appropriate controlled device. The controlled device receives the message from the network service and performs the task in response to receiving the message.

[0020] In addition, the controlled device may be configured to send a message to the remote control to notify the remote control of an event. For example, the controlled device may send a message to the remote control to notify the remote control device that playback of media content has completed. In this example, the controlled device sends a message to the network service. The network service determines the remote control that is paired with the controlled device and forwards the message to the remote control paired with the sending controlled device. The remote control receives the message and performs various actions in response to receiving the message. The remote control may, for example, update a user interface of the remote control or send a message to the controlled device to begin playback of another video.

[0021] According to some examples, the network service may assign each remote control and each controlled device a unique identifier. When pairing devices, the network service may utilize the unique identifier associated with each device to route communication signals properly. For example, the network service may initiate a session that includes each unique identifier of remote controls and controlled devices that are authorized to communicate with each other. The network service can then route messages to members of the session. Any number of remote controls may be paired with a single controlled device and one remote control may be paired to any number of controlled devices. When pairing multiple remote controls and multiple controlled devices associated with a single user, the user may identify a subset of the remote controls as paired to a subset of the controlled devices, and manage which remote controls control which controlled devices.

[0022] Remote controls and controlled devices may be paired using any one of several different techniques. As one example, a user may maintain a user account using the network service, and the remote controls and controlled devices may be associated with the user

account. For example, upon connecting to a network service, the remote controls and controlled devices may notify the network service that the remote controls and controlled devices are connected to the network. The network service may, in some examples, determine whether the remote controls and controlled devices are authorized to be associated with the user account. If authorized, the network service initiates a session and assigns the remote controls and controlled devices unique identification numbers. The network service uses the unique identification numbers for pairing during a session. In another example, a user may be presented with a quick response (“QR”) code via the controlled device that the user scans with the remote control (e.g., using a camera of the remote control). The QR code identifies a user account or previously initiated session maintained by the network service. Upon scanning the QR code, the remote control may send a message to the network service indicating that the network service should assign a unique identification number to the remote control and pair the remote control with the user account or session identified by the QR code.

[0023] In this manner, one or more remote controls may control one or more controlled devices via the network service. Using the network service to transmit and receive messages between a remote control and a controlled device may enable non-traditional devices having rich input and display capabilities to act as a remote control. In addition, by using the network service as an intermediary, the remote control and the controlled device, in various instances, may not need to be connected to the same local area network, nor in physical proximity to each other. The network service may also enable pairing of a nearly limitless number of remote controls and controlled devices.

[0024] FIG. 1 is a block diagram illustrating an example networked environment 10 with a remote control 14 and controlled device 18, in accordance with one aspect of the present disclosure. The networked environment 10 includes remote control 14 that communicates with controlled device 18 via network 22 and servers 24A–24N (collectively “servers 24”) in network 22. According to an aspect of the disclosure, remote control 14 is a web-enabled cellular phone. Other examples of the remote control 14 include, but are not limited to, portable or mobile devices such as cellular phones or other wireless communication devices, personal digital assistants (PDAs), laptop computers, portable gaming devices, portable media players, e-book readers, watches, as well as non-portable devices such as desktop

computers. For purposes of illustration only in this disclosure, remote control 14 is described as a portable or mobile device that a user can carry, but aspects of this disclosure should not be considered limited to portable or mobile devices.

[0025] Remote control 14 may be configured to transmit signals to and receive signals from network 22. In some examples, remote control 14 is configured to initiate contact with servers 24. For example, remote control 14 may notify servers 24 that remote control 14 is connected to network 22. Remote control 14 may notify servers 24, for example, automatically upon being powered on. In another example, a user may log in to a user account maintained by the servers 24 using remote control 14, thereby notifying servers 24 that remote control 14 is connected to network 22. Remote control 14 may also be configured to transmit a message to servers 24 of network 22 that identifies remote control 14, which can be used by servers 24 to pair remote control 14 with controlled device 18. The message may also contain control information for controlling one or more functions of controlled device 18.

[0026] In the example shown in FIG. 1, remote control 14 includes a user interface 26 that may be used to present information to a user. For example, user interface 26 may display controls 30 and information 34 associated with content being played on controlled device 18. Controls 30 may depend on the capability of remote control 14 or controlled device 18, and include, for example, fast forward, reverse, skip ahead or back, play, stop, move to new content, etc. The type and quantity of information 34 may also depend on the capability of remote control 14 and controlled device 18, and include, for example, playback information such as time remaining of content, playlist information, content rating information, etc.).

[0027] Controlled device 18 may include a variety of network-enabled devices, such as a network enabled television, set top box, personal video recorder, or other device capable of being network-connected and controlled remotely. In an example, controlled device 18 is an Internet-connected television that is configured to receive signals from and transmit signals to network 14. For example, controlled device 18 may be configured to initiate contact with servers 24. For example, controlled device 18 may notify servers 24 that controlled device 18 is connected to network 22. Controlled device 18 may notify servers 24, for example, automatically upon being powered on. In another example, a user may log in to a user account maintained by the servers 24 using controlled device 18, thereby notifying servers 24

that controlled device 18 is connected to network 22. Controlled device 18 can also be configured to transmit a message to servers 24 of network 22 that identifies controlled device 18, which can be used by servers 24 to pair controlled device 18 with remote control 14. The message may also contain notification data for updating a user interface of remote control (e.g., indicating completion of a task, such as completing playback of content).

[0028] As shown in FIG. 1, controlled device 18 may include a display 38 for displaying content to a user. In some examples, controlled device 18 receives one or more messages from remote control 14 via network 22 and servers 24 to alter the content that is rendered on display 38 of controlled device 18. In another example, controlled device 18 transmits a message to remote control 14 via network 22 and servers 24 to notify the user of remote control 14 that playback of content has been completed. Other messages can also be transmitted between controlled device 18 and remote control 14 via network 22 and servers 24. For example, controlled device 18 may transmit content information such as a preview of the content that is being displayed on controlled device 18, a playlist of future content to be displayed on controlled device 18, rating information associated with the content being displayed on controlled device 18, or the like.

[0029] As shown in FIG. 1, network 22 and servers 24 are connected to remote control 14 and controlled device 18. Network 22 may be connected to remote control 14 and controlled device 18 via wired and/or wireless links. For example, remote control 14 and controlled device 18 may be coupled to network 22 via a combination of any wireless or wired communication medium, such as a radio frequency (RF) spectrum or one or more physical transmission lines, or any combination of wireless and wired media. The links may form part of a packet-based network, such as a local area network, a wide-area network, or a global network such as the Internet. The links generally represent any suitable communication medium, or collection of different communication media, for transmitting signals from remote control 14 to network 22 and from controlled device 18 to network 22, including any suitable combination of wired or wireless media. The links may include routers, switches, base stations, or any other equipment that may be useful to facilitate communication from remote control 14 and controlled device 18 to network 22.

[0030] Network 22 may include a wide-area network such as the Internet, a local-area network (LAN), an enterprise network, or one or more other types of networks. Servers 24

may be any of several different types of network devices. For instance, servers 24 may be conventional web servers, specialized media servers, personal computers operating in a peer-to-peer fashion, or other types of network devices. As described in greater detail with respect to FIG. 5, in some examples, servers 24 include one or more data repositories or databases for storing information, such as identification numbers, session identifiers, and any other information required to carry out data transfer between remote control 14 and controlled device 18. In some examples, the data repositories of servers 24 may be structured as one or more tables, databases, linked lists, radix trees, Google File Systems, Google BigTable database systems, or other suitable data structure.

[0031] According to an aspect of the disclosure, network 22 and servers 24 facilitate an exchange of data between remote control 14 and controlled device 18. For example, servers 24 associated with network 22 may operate as an intermediary between remote control 14 and controlled device 18 to relay data between remote control 14 and controlled device 18. In some examples, servers 24 “pair” remote control 14 and controlled device 18 such that information and commands from remote control 14 can be transmitted to controlled device 18, and information and commands can be transmitted from controlled device 18 to remote control 14. For example, remote control 14 and controlled device 18 may initially notify servers 24 that remote control 14 and controlled device 18 are connected to network 22 and available for pairing. In some examples, servers 24 authenticate that remote control 14 and controlled device 18 are permitted to be paired. For example, servers 24 may maintain a user account that includes permissions for remote control 14 and controlled device 18, which allows remote control 14 and controlled device 18 to be paired. In some examples, the authorization of remote control 14 and controlled device 18 utilizes HTTP header information to identify remote control 14 and controlled device 18 as being associated with the user account. Servers 24 may assign unique identification numbers to each authorized remote control 14 and controlled device 18 connected to network 22. To pair remote control 14 and controlled device 18, servers 24 may create a session that includes all of the issued unique identification numbers.

[0032] After adding remote control 14 and controlled device 18 to the session, messages generated by remote control 14 and controlled device 18 include their unique identification numbers, so that the servers 24 recognize remote control 14 and controlled device 18 as

being included in the session. Servers 24 receive messages from remote control 14 and controlled device 18 and route the messages to other members of the session. For example, a user may actuate one of controls 30 of remote control 14 to alter the content displayed on display 38 of controlled device 18. Remote control 14 transmits a control message that includes the unique identifier of remote control 14 to servers 24 via network 22. Servers 24 identify that remote control 14 is a member of a session based on the unique identification number of remote control 14. Servers 24 then routes the control message to controlled device 18, which is also a member of the session. Controlled device 18 receives the control message and performs the appropriate action.

[0033] Alternatively or additionally, controlled device 18 transmits information (e.g., data for updating content information 34 displayed on remote control 14) that includes the unique identifier of controlled device 18 to servers 24 via network 22. Servers 24 identify that controlled device 18 is a member of the session based on the unique identification number of controlled device 18. Server then routes the information to remote control 14, which is also a member of the session. Remote control 14 then receives the information and updates user interface 26 and information 34 according to the received information.

[0034] FIG. 2 is a block diagram illustrating an example networked environment 60 having remote controls 62A–62N (collectively, “remote controls 62”) and controlled devices 64A–64N (collectively, “controlled devices 64”) connected via network 66 and servers 68A–68N (collectively, “servers 68”), in accordance with one aspect of the present disclosure. In some examples, remote controls 62, controlled devices 64, network 66, and servers 68 may be configured similarly to remote control 14, controlled device 18, network 22, and servers 24, respectively, shown in FIG. 1. Remote controls 62 and controlled devices 64 shown in FIG. 2 need not be configured in precisely the same way. For example, each remote control of remote controls 62 may be a different make or model of web-enabled mobile phone, according to one or more non-limiting examples. In addition, each of the controlled devices of controlled devices 64 may be a different make or model network-compatible television, according to one or more non-limiting examples.

[0035] Servers 68 of network 66 may be responsible for initiating sessions and enabling pairing any of remote controls 62 with any of controlled devices 64. For example, servers 68 of network 66 may assign a unique identifier to each of the remote controls 62 and to each of

the controlled devices 64. As described in more detail with respect to FIG. 5, servers 68 can utilize the unique identifiers to enable communication between the remote controls 62 and controlled devices 64.

[0036] Any number of remote controls 62 may be paired with a single controlled device from the controlled devices 64. In addition, a single remote control of the remote controls 62 may be paired with any number of the controlled devices 64. When pairing multiple remote controls 62 and multiple controlled devices 64 associated with a single user, the user may manage permissions of the remote controls 62 and controlled devices 64. For example, a user may identify a subset of the remote controls 62 as being paired with a subset of the controlled devices 64.

[0037] Remote controls 62 and controlled devices 64 may be paired using a variety of techniques. In some examples, servers 68 may generate a session and pair any remote controls 62 and controlled devices 64 associated with the session. For example, servers 68 may issue each of remote controls 62 and controlled devices 64 connected to servers 68 unique identification numbers, and associate those assigned unique identification numbers as being members of the session. Remote controls 62 and controlled devices 64 include their unique identification numbers in messages sent to servers 68, and servers pair the device sending the message with other members of the session.

[0038] In other examples, remote controls 62 and controlled devices 64 may be individually added to a session maintained by servers 68. For example, a controlled device, such as controlled device 64A may present a user with a QR code that identifies a session that has been created by servers 68. The user may scan the QR code with one of remote controls 62 (e.g., remote control 62A). Upon scanning the QR code, remote control 62A transmits a message to servers 68 requesting that servers 68 issue remote control 62A a unique identification number and add remote control 62A to the session associated with the QR code, thereby pairing remote control 62A with controlled device 64A.

[0039] In some examples, more than one user of more than one of the remote controls 62 may be paired with a single controlled device, such as controlled device 64A. For example, more than one user of more than one of the remote controls 62 may scan the same QR code displayed on controlled device 64A. In such examples, servers 68 pair each of the remote controls 62 with controlled device 64A by issuing each of remote controls 62 a unique

identification number and adding remote controls 62 to the session, thereby allowing control messages to be sent from remote controls 62 to controlled device 64A. Controlled device 64A can also send information (e.g., information to updates user interfaces of remote controls 62) to all of the paired remote controls 62 (e.g., all remote controls 62 that are members of the same session as controlled device 64A) via servers 68.

[0040] A remote control, such as remote control 62A may also be paired with more than one of the controlled devices 64 via servers 68. For example, a user may log into a user account maintained on servers 68 to associate devices (e.g., any of remote controls 62 or controlled devices 64) with the user account. The user may then identify remote controls 62 as remote control devices and controlled devices 64 as controlled devices, and servers 68 can pair the devices according to the user's preferences.

[0041] FIG. 3 is a block diagram illustrating an example remote control 75, which may be an example of remote control 14 shown in FIG. 1 or one of remote controls 62 shown in FIG. 2. Remote control 75 may include battery 80, user interface 84, display 88, storage device 92 having one or more applications 94, one or more processors 96, and network module 100. Other implementations of remote control 75 are possible, having more or fewer components than those shown in FIG. 3. For example, in examples where remote control 75 is a cellular phone or other wireless communication device, remote control 75 includes a microphone and speaker for voice communication.

[0042] Battery 80 provides power for the various units of remote control 75, and may be rechargeable. Examples of battery 80 include a lithium polymer battery, a lithium ion battery, nickel cadmium battery, and a nickel metal hydride battery. User interface 84 allows a user of remote control 14 to interact with remote control 75. Examples of user interface 84 include a keypad embedded on device 84, a keyboard, a mouse, a roller ball, buttons, or other devices that allow a user to interact with remote control 75. In some examples, user interface 84 may include a microphone to allow a user to provide voice commands. In some examples, user interface 84 generates a graphical user interface that allows a user to initiate commands. For example, user interface 84 may include a software module that generates a graphical user interface that is displayed on display 88.

[0043] Display 88 may include one of a variety of display devices such as a liquid crystal display (LCD), an e-ink display, a cathode ray tube (CRT), a plasma display, an organic light

emitting diode (OLED) display, or another type of display. Display 88 presents the content generated by remote control 75 (e.g., user interface 84 of remote control 75) to a user of remote control 75. For example, display 88 may present applications executed on remote control 75 such as a remote control application, a web browser, content retrieved from servers, and other functions that may need to be presented to the user. In some examples, display 88 may provide some or all of the functionality of user interface 84. For example, display 88 may be a touch screen that allows a user to interact with remote control 75.

[0044] Storage device 92 stores instructions for applications 94 that may be executed by one or more processors 96. For purposes of illustration only, in the following description applications 94 that may be executed by one or more processors 96 are described below as being executed by one processor 96. Applications 94 may be downloaded by a user via a network (e.g., downloaded from one or more of servers 24 via network 22 as shown in FIG. 1) or may be preprogrammed within remote control 75. Applications 94 may be executed by processor 96 in response to a user interacting with remote control 75 to execute the applications 94. Applications 94 may also be executed by processor 96 when a user turns on remote control 75.

[0045] Storage device 92 may also include instructions that cause processor 96 to perform various functions ascribed to processor 96 in this disclosure. Storage device 92 may comprise a computer-readable, machine-readable, or processor-readable storage medium that comprises instructions that cause one or more processors, e.g., processor 96, to perform various functions. Storage device 92 may include any volatile, non-volatile, magnetic, optical, or electrical media, such as a random access memory (RAM), read-only memory (ROM), non-volatile RAM (NVRAM), electrically-erasable programmable ROM (EEPROM), flash memory, or any other digital media. In some embodiments, storage device 92 may comprise one or more of a non-transitory/tangible storage media, where the data stored in such media may or may not change (e.g., ROM, RAM).

[0046] A user may interact with user interface 84 and/or display 88 to execute one or more applications 94 stored on storage device 92. Some applications may be executed automatically by remote control 75, such as when remote control 75 is powered on or booted up. In response, processor 96 executes the one or more applications 94 selected by a user, or executes the one or more applications 94 executed by remote control 75. Processor 96 may

include any one or more of a microprocessor, a controller, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field-programmable gate array (FPGA), or equivalent discrete or integrated logic circuitry. Additionally, the functions attributed to processor 96, in this disclosure, may be embodied as software, firmware, hardware or any combination thereof.

[0047] Processor 96 may execute one or more of applications 94 either alone or simultaneously. Examples of applications 94 include a remote control application, web browsers, e-mail, programs to retrieve stock quotes, programs to search for restaurants, programs that retrieve current and future weather information, games, a program to search the Internet, a program that provides news, a program that provides maps, and other programs executed by processor 96. Applications 94 may be executed based on a request from a user, and may be terminated based on a request from a user. Some applications 94 may be running continuously in the background. Some applications 94 may be executed automatically by remote control 75 such as at power up and may be terminated automatically by remote control 75 such as at power down.

[0048] One or more applications 94 executed by processor 96 may require data from one or more of servers (e.g., such as servers 24 shown in FIG. 5). Network module 100 may transmit data/requests to and receive data/responses from one or more servers via a network (such as network 22 shown in FIG. 1). Network module 100 may also provide received data to processor 96 for further processing. Network module 100 may support wireless or wired communication, and includes appropriate hardware and software to provide wireless or wired communication. For example, network module 100 may include an antenna, modulators, demodulators, amplifiers, and other circuitry to effectuate communication between remote control 75 and one or more servers associated with a network. Network module 100 may communicate with one or more servers associated with a network according to a network communication protocol, such as, for example, hypertext transfer protocol (HTTP), HTTP secured by transport layer security or secure sockets layer (HTTPS), simple mail transfer protocol (SMTP), simple object access protocol (SOAP), or other communication protocols.

[0049] Remote control 75 may include a remote control application (e.g., a remote control application stored with applications 94 stored in storage device 92) that allows a user to initiate commands being sent to a controlled device, such as controlled device 18 shown in

FIG. 1. A user may interact with user interface 84 and/or display 88 to execute the remote control application. Processor 96 then executes the remote control application and causes display 88 to display a remote control application user interface to the user. In another example, a remote control application may be stored on one or more servers on a network and be accessible via the network. For example, a user may interact with user interface 84 and/or display 88 to execute a web browser. Processor 96 then executes the web browser application and causes display 88 to display a web browser to the user. The user may then interact with user interface 84 and/or display 88 to utilize a website containing remote control application content.

[0050] A user may use the remote control application of remote control 75, for example, to initiate contact with a server, such as server 24, for pairing remote control 75 to one or more controlled devices, such as controlled device 18 shown in FIG. 1. In some examples, the user may also utilize the remote control application of remote control 75 to select one or more previously paired controlled devices, and to send control messages to one or more paired controlled devices. For example, the user may interact with user interface 84 and/or display 88 to interact with and control any available controlled devices.

[0051] FIG. 4 is a block diagram illustrating an example controlled device 118, which may be an example of controlled device 18 shown in FIG. 1 or one of controlled devices 64 shown in FIG. 2. According to one example of the present disclosure, controlled device 118 includes user interface 120, display 124, storage device 128, one or more processors 132, and network module 136. Other example implementations of controlled device 118 are possible, having more or fewer components than those shown in FIG. 4. For example, controlled device 118 may be a personal computer having additional components (e.g., an optical drive, a camera, etc.). In another example, controlled device 118 may be a personal media player having fewer components than those shown in FIG. 4 (e.g., a personal media player that lacks a display).

[0052] User interface 120 allows a user of controlled device 118 to interact with controlled device 118. Examples of user interface 120 include an embedded keypad or other buttons. The user interface 120 may also include a detachable or otherwise independent device, such as a traditional remote control device having a keypad, a keyboard, a mouse, a roller ball, buttons, or other devices that allow a user to interact with controlled device 18. A user may

utilize user interface 120 to control media content being presented by controlled device 118 (e.g., audio or video content). In an example, a user may utilize user interface 120 to navigate to a web page on the Internet in order to display the content hosted by the web page (e.g., YouTube®, Hulu®, Netflix®, other subscription or non subscription based video content).

[0053] Display 124 may comprise a variety of display devices such as a liquid crystal display (LCD), an e-ink display, a cathode ray tube (CRT), a plasma display, an organic light emitting diode (OLED) display, or another type of display device. Display 124 presents content to a user of controlled device 118. For example, display 124 may be configured to present audio and/or video content from a cable service provider, a satellite television provider, content accessible via the World Wide Web, or other content providers.

[0054] Although controlled device 118 is shown as including display 124, aspects of this disclosure should not be considered limited to examples that include display 124. In some examples of controlled device 118, display 124 may be optional. For example, if controlled device comprises a web-enabled music player or a radio, controlled device 118 may not include display 124. In other examples, controlled device 118 may include an external, independent display. For example, controlled device 118 may be configured as a set top box or other component that is connectable to a display.

[0055] Storage device 128 stores instructions for applications 130 that may be executed by one or more processors 132 associated with controlled device 118. For purposes of illustration only in the following description, applications 130 that may be executed by one or more processors 132 are described below as being executed by one processor 132. Applications 130 may be pre installed by a manufacturer of controlled device 118, or may be downloaded by a user from a server via a network, such as servers 24 and network 22 shown in FIG. 1. Applications 130 may be executed by processor 132 in response to a user interacting with controlled device 118 to execute the applications 130.

[0056] Storage device 128 may also include instructions that cause processor 132 to perform various functions ascribed to processor 132 in this disclosure. Storage device 132 may comprise a computer-readable, machine-readable, or processor-readable storage medium that comprises instructions that cause one or more processors, e.g., processor 132, to perform various functions. Storage device 132 may include any volatile, non-volatile, magnetic,

optical, or electrical media, such as a random access memory (RAM), read-only memory (ROM), non-volatile RAM (NVRAM), electrically-erasable programmable ROM (EEPROM), flash memory, or any other digital media. In some embodiments, storage device 132 may comprise one or more of a non-transitory/tangible storage media, where the data stored in such media may or may not change (e.g., ROM, RAM).

[0057] A user may interact with user interface 120 and/or display 124 to execute one or more of applications 130 stored on storage device 128. Some applications 130 may be executed automatically by controlled device 118 such as when controlled device 118 is turned on or booted up. In response, processor 132 executes the one or more applications 130 selected by a user, or executes the one or more applications 130 executed by controlled device 118. Processor 132 may include any one or more of a microprocessor, a controller, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field-programmable gate array (FPGA), or equivalent discrete or integrated logic circuitry. Additionally, the functions attributed to processor 132, in this disclosure, may be embodied as software, firmware, hardware or any combination thereof.

[0058] Processor 132 may execute one or more of applications 130 either alone or simultaneously. Examples of applications 130 include an application for displaying television content provided by a satellite or cable provider, an application for displaying content hosted on the World Wide Web, a web browser application, a social networking application, an e-mail application, programs to retrieve stock quotes, programs to search for restaurants, programs that retrieve current and future weather information, games, a program to search the Internet, a program that provides news, a program that provides maps, and other programs executed by processor 132. Applications 130 may be executed based on a request from a user, and may be terminated based on a request from a user. Some applications 130 may be running continuously in the background. Some applications 130 may be executed automatically by controlled device 118 such as at power up and may be terminated automatically by controlled device 118 such as at power down.

[0059] In some examples, any application of applications 130 executed by processor 132 may require data from one or more of servers, such as servers 24 shown in FIG. 1. Network module 136 is configured to transmit data/requests to and receive data/responses from one or more servers via network. Network module 136 may provide received data to processor 132

for further processing. Network module 136 may support wireless or wired communication, and includes appropriate hardware and software to provide wireless or wired communication. For example, network module 136 may include an antenna, modulators, demodulators, amplifiers, and other circuitry to effectuate communication between controlled device 118 and one or more servers associated with a network. Network module may 100 may communicate with one or more servers associated with the network according to a network communication protocol, such as, for example, hypertext transfer protocol (HTTP), HTTP secured by transport layer security or secure sockets layer (HTTPS), simple mail transfer protocol (SMTP), simple object access protocol (SOAP), or other communication protocols.

[0060] Controlled device 118 may be used, in some examples, in conjunction with a remote control, such as remote control 14 shown in FIG. 1, remote controls 62 shown in FIG. 2, or remote control 75 shown in FIG. 3. For example, storage device 92 may store application instructions associated with a video application or web browser for displaying video content from the World Wide Web (e.g., YouTube® content, Hulu® content, Netflix® content, etc.). A user may interact with user interface 120 to execute the video or web browser application. Processor 120 then executes the video or web browser application and causes display 124 to display content to the user.

[0061] A user may utilize the video application of applications 130 or web browser of controlled device 118 to facilitate pairing of controlled device 118 to one or more remote controls, such as remote control 14 shown in FIG. 1. For example, controlled device 118 may notify a server, such as sever 24 shown in FIG. 1, that it is available to be joined to a session maintained by server 24 upon powering on or executing a video or web browser application. In other examples, a controlled device 118 may provide an interface that allows a user to authorize one or more remote controls to send commands to controlled device 118 via a network. Additionally or alternatively, controlled device 118 may display a QR code using display 124 that can be scanned by a remote control. After scanning the QR code displayed using display 124 with the remote control, the remote control may be authorized to send control signals to controlled device 118 via the network.

[0062] FIG. 5 is a block diagram illustrating an example server 160 associated with network 162, which may be an example of servers 24 of network 22 shown in FIG. 1, or servers 68 of network 66 shown in FIG. 2, in accordance with one aspect of the present disclosure. While

described herein in relation to servers 68 of FIG. 2, server 160 may also be implemented in a variety of other network environments having components other than those shown in FIG. 2. As shown in FIG. 5, server 160 may be comprised as a single unit with an interface module 164, a device management module 168, and a data repository 172. While shown as a single unit in FIG. 5, in other implementations, hardware and functions associated with server 160 may be spread among more than one server unit. In addition, sever 160 may include more modules shown in FIG. 5.

[0063] Interface module 164 is configured to accept signals being received by the server 160 and transmit signals being transmitted by server 160. In some examples, input and output network interfaces of the interface module 164 may be functionally integrated, while in other examples, input and output interfaces may be separate interfaces of interface module 164. For example, network interfaces of interface module 164 may include one or more network interface cards (NICs) configured to communicate over, for example, Ethernet, Transmission Control Protocol (TCP), Internet protocol (IP), Asynchronous Transfer Mode (ATM), or other network communication protocols. In some examples, server 160 may include a plurality of either or both input and output interfaces.

[0064] Data repository 172 stores information such as user information, session information, unique identifier numbers, and any other information required to carry out data transfer between remote control 14 and controlled device 18. In some examples, an entry within data repository 172 includes a unique identification number that has been assigned to a remote control or controlled device. Alternatively or additionally, an entry within data repository 172 may identify an association between a remote control and a controlled device. In some examples, data repository 172 may also be configured to store data from past sessions between remote control 14 and controlled device 18. In some examples, data repository 172 may be structured as one or more tables, databases, linked lists, radix trees, Google File Systems, Google BigTable database systems, or other suitable data structure.

[0065] Device management module 168 generates messages, as well as controls messages being received from and messages being transmitted to remote controls 62 and controlled devices 64 of FIG. 2. In some examples, device management module 168 receives messages from remote controls 62 and controlled devices 64 notifying device management module 168 that the devices are available for pairing. Device management module 168 may authorize

devices according to permissions set by a user having a user account. After providing authorization, device management module 168 may generate an identification message to aid device management module 168 in managing a session. In the example of one of remote controls 62, such as remote control 62A, requesting authorization to join a session maintained by device management module 168, device management module 168 assigns remote control 62A a unique session identification number (SID). Device management module 168 may also store the SID associated with remote control 62A in data repository 172, and return the SID to remote control 62A. Device management module 168 may also generate and store unique SIDs for controlled devices 64 in a similar manner. For example, device management module 168 may assign each connected controlled device 64 that requests authorization to join a session maintained by device management module with a unique SID which the controlled devices 64 can then use to identify itself in future communications.

[0066] After assigning SIDs to connected devices, device management module 168 can manage messages between remote controls 62 and controlled devices 64. For example, device management module 168 may receive a message containing an SID and control information from one of remote controls 62, such as remote control 62A, for controlling on or more controlled devices 64. Device management module 168 then identifies the session that includes the SID of remote control 62A and determines the intended recipient(s) (e.g., one or more controlled devices 64) based on the other members of the session that have been assigned SIDs. That is, device management module 168 queries data repository 172 to determine the SIDs of all devices included in the session. After determining which controlled devices 64 are associated with the session, device management module 168 transmits the control information to the intended controlled devices 64. In some examples, device management module 168 transmits the control information to all devices having SIDs that are associated with the session. Devices receiving the control information that are not configured to execute the control information (e.g., other remote controls 62 of the session) can ignore the message. In other examples, device management module 168 determines which SIDs of the session are associated with controlled devices 64, and transmits the control information to only the controlled devices 64. The control messages can be used by the controlled devices 64 to alter playback of content of controlled devices 64.

[0067] Device management module 168 may also control messages being transmitted from controlled devices 64 to remote controls 62. For example, after assigning SIDs to connected devices, device management module 168 may be configured to receive a message containing an SID from a controlled device, such as controlled device 64A, as well as content information for updating a user interface associated with one or more connected remote controls 62. Device management module 168 then identifies the session that includes the SID of controlled device 64A and determines the intended recipient(s) (e.g., one or more remote controls 62) based on the other members of the session that have been assigned SIDs. That is, device management module 168 queries data repository 172 to determine the SIDs of all devices included in the session. After determining which remote controls 62 are associated with the session, device management module 168 transmits the content information to the intended remote controls. In some examples, device management module 168 transmits the content information to all devices having SIDs that are associated with the session. Devices receiving the content information that are not configured to execute the content information (e.g., other controlled devices 64 of the session) can ignore the message. In other examples, device management module 168 determines which SIDs of the session are associated with remote controls 62, and transmits the content information to only the remote controls 62. The content information may be used by the remote controls 62 to update a user interface of remote controls 62 or update playlist information of remote controls 62.

[0068] According to some aspects of the disclosure, device management module 168 carries out the routing of information between remote controls 62 and controlled devices by “pairing” the remote controls 62 and controlled devices 64 using the identification numbers described above. In some examples, device management module 168 pairs all authorized devices that have been issued an SID. In other examples, device management module 168 identifies and stores associations of remote controls 62 and controlled devices 64 to facilitate repeat communication between remote controls 62 and controlled devices 64. Device management module 168 may pair devices in a variety of ways including, for example, utilizing QR codes or allowing a user to manage pairing via a user interface.

[0069] In some examples, device management module 168 may utilize a QR code to facilitate a device joining a session and being paired with other devices of the session. For example, device management module 168 may generate a unique session identification

number that identifies a session. Upon scanning the QR code (e.g., the QR code being displayed on one or more of controlled devices 64), a remote control, such as remote control 62A, transmits a message to device management module 168 to request that remote control 62A be included in the session identified in the QR code. In some examples, device management module 168 then authorizes remote control 62A, issues remote control 62A an SID, and adds the SID to the session. The process can be repeated by other remote controls 62, such that device management module pairs multiple remote controls 62 with controlled device 64A, thereby allowing controlled device 64A to receive commands from multiple remote controls 62.

[0070] In other examples, a user may access a user account stored, for example, in data repository 172 to enable device management module 168 to pair remote controls 62 and controlled devices 64. For example, a user may log into a user account maintained on server 160 to associate devices (e.g., any of remote controls 62 or controlled devices 64) with the user account. Unique identification numbers for each device may be stored, for example, in data repository 172. The user may then identify remote controls 62 as remote control devices and controlled devices 64 as controlled devices, and device management module 168 can pair the devices according to the user's preferences. After pairing, device management module 168 can facilitate communication between remote controls 62 and controlled devices 64.

[0071] According to some aspects of the disclosure, remote controls 62 and controlled devices 64 are HTTP clients of server 160. That is, server 160 is configured to receive and transmit messages according to HTTP protocol. In other examples, however, server 160 may be configured to receive and transmit messages according to other protocols, such as Extensible Messaging and Presence Protocol (XMPP) or Remote Procedure Call (RPC) protocol.

[0072] FIG. 6 is a flowchart illustrating an example operation of a remote control communicating with a network server, in accordance with one aspect of the present disclosure. For purposes of illustration only, the method of FIG. 6 is described with respect to networked environment 10 of FIG. 1, though various other systems and/or devices may be utilized to implement or perform the method shown in FIG. 6.

[0073] According to some examples, remote control 14 notifies servers 24 that remote control is connected to network 22, and servers 24 assign remote control 14 a remote control

identifier (e.g., a unique SID) (200). Remote control 14 may notify servers 24, for example, automatically upon being powered on. In another example, a user may log in to a user account maintained by the servers 24 using a remote control application on remote control 14, thereby notifying servers 24 that remote control 14 is connected to network 22. In another example, remote control 14 may notify servers 24 that it is connected to network 22 and request an SID by, for example, scanning a QR code displayed on controlled device 18. The QR code may be associated with a user account or active session, and servers 24 may assign remote control 14 an SID associated with the user account or session. In some examples, prior to assigning remote control 14 an SID, server 24 verifies that remote control 14 is authorized to be assigned an SID. For example, a user may maintain an account on servers 24 that includes permissions regarding which remote controls and controlled devices can be associated with the user account and assigned SIDs. Upon authorization (e.g., HTTP authorization using HTTP header information), servers 24 assign remote control 14 an SID.

[0074] Remote control 14 also transmits a message to server 24 that includes a remote control identifier and control information. For example, the remote control identifier may include the SID issued by servers 24 that identifies remote control 14 as being part of a session maintained by servers 24 (204). The control information may include data intended to alter the operation of controlled device 18 (e.g., stop playback of content, move to other content, etc.).

[0075] Server 24 then identifies controlled device 18 that is intended to receive the control information. For example, server 24 may query a database of stored identification numbers to determine which controlled device is associated with the session that includes the remote control identifier. Server then transmits the control information to the intended controlled device 18 (210). In some examples, server 24 forwards the control information from the message directly to one or more controlled devices 18. In other examples, server 24 may process and/or repackage the control information of the message into a new message. After receiving the control information, controlled device 18 executes an action in accordance with the control information (212).

[0076] In some examples, multiple remote controls 14 can be paired with a single controlled device 18. For example, a plurality of remote controls 14 may be used by one or more users to scan the same QR code displayed on a single controlled device 18. In this example, the

server may transmit a control message from each of the plurality of remote controls 14 to controlled device 18. Server 24 may also maintain a priority list that provides certain remote controls 14 with a higher priority than other remote controls. Upon receiving conflicting commands simultaneously, then, server 24 can refer to the priority list to determine which control information to send to controlled device 18.

[0077] FIG. 7 is a flowchart illustrating an example operation of a network server handling communication between a remote control and a controlled device, in accordance with one aspect of the present disclosure. For purposes of illustration only, the method of FIG. 7 is described with respect to networked environment 10 of FIG. 1, though various other systems and/or devices may be utilized to implement or perform the method shown in FIG. 7.

[0078] In some examples, server 24 receives a message from remote control 14 having a remote control identifier and control information (220). For example, the message from remote control 14 may contain an SID issued by servers 24 that identifies remote control 14 as being part of a session. In addition, the message may contain control information intended to alter the operation of one or more controlled devices 18 (e.g., stop playback, begin next playback item, etc.). After receiving the message from remote control 14, server 24 retrieves a controlled device identifier that identifies one or more controlled devices 18 intended to receive the control information (224). For example, server 24 may query a database of stored identification numbers to determine which controlled device is associated with the session that includes the remote control identifier. Server 24 then transmits a message to the intended recipients (one or more controlled devices 18) of the control information (228). In some examples, server 24 forward the control information from the first message directly to one or more controlled devices 18. In other examples, server 24 may process and/or repackage the control information of the message from remote control 14 into a new message, which can be sent to the intended recipients of the control information.

[0079] Server 24 may, in some examples, initialize a group session upon receiving the message from remote control 14. For example, server 24 may maintain a session that includes the identifiers for all of the components sending and receiving messages (e.g., remote control(s) 14 and controlled device(s) 18). The session may be maintained by a device management module (such as device management module 168 shown in FIG. 5) of server 24 in order to efficiently route the messages from remote control 14 to controlled

device 18, as well as messages from controlled device 18 to remote control 14 (e.g., as discussed below with respect to FIGS. 8 and 9). Server 24 may store identifiers associated with a session in a data repository (such as data repository 172 shown in FIG. 5).

[0080] FIG. 8 is a flowchart illustrating an example operation of a network server handling communication between a controlled device and a remote control, in accordance with one aspect of the present disclosure. For purposes of illustration only, the method of FIG. 9 is described with respect to networked environment 10 of FIG. 1, though various other systems and/or devices may be utilized to implement or perform the method shown in FIG. 9.

[0081] According to some examples, controlled device 18 notifies servers 24 that controlled device 18 is connected to network 22, and servers 24 assign controlled device 18 a controlled device identifier (e.g., a unique SID) (236). Controlled device 18 may notify servers 24, for example, automatically upon being powered on. In another example, a user may log in to a user account maintained by the servers 24 using an application on controlled device 18 (e.g., a web browser application), thereby notifying servers 24 that controlled device 18 is connected to network 22. In some examples, prior to assigning controlled device 18 an SID, server 24 verifies that controlled device 18 is authorized to be assigned an SID. For example, a user may maintain an account on servers 24 that includes permissions regarding which remote controls and controlled devices can be associated with the user account and assigned SIDs. Upon authorization (e.g., HTTP authorization using HTTP header information), servers 24 assign controlled device 18 an SID.

[0082] Controlled device 18 also transmits a message to server 24 that includes a controlled device identifier and content information. For example, the controlled device identifier may include the SID issued by servers 24 that identifies controlled device 18 as being part of a session (238). The content information may include data intended to update a user interface of remote control 14 (e.g., update playlist information, request user to take action regarding content playback, notify user that playback of new content has begun, and the like).

[0083] Server 24 then receives the message from controlled device 18 and identifies remote control 14 that is intended to receive the content information (240). For example, server 24 may query a database of stored identification numbers to determine which remote control 14 is associated with the session that includes the controlled device identifier. Server 24 then transmits the control information to the intended controlled device 18 (242). In some

examples, server 24 forwards the content information from the message directly to one or more remote controls 14. In other examples, server 24 may process and/or repackage the content information of the message into a new message. After receiving the content message from server 24, remote control executes an action in accordance with the message (e.g., update a user interface of remote control 14) (244)).

[0084] Messages other than those specifically described with respect to FIG. 8 may also be exchanged between controlled device 18 and server 24. According to some aspects of the disclosure, controlled device 18 may complete a preliminary identification process, during which server 24 supplies controlled device 18 with an identification number. For example, prior to transmitting a message to remote control 14, controlled device 18 may initiate contact with server 24 to request an identification number. Server 24 may then generate an identification number and transmit the identification number to controlled device 18. Controlled device 18 can then incorporate that identification number into the identifier portion of the message described above.

[0085] FIG. 9 is a flowchart illustrating an example operation of a controlled device communicating with a network server, in accordance with one aspect of the present disclosure. For purposes of illustration only, the method of FIG. 9 is described with respect to networked environment 10 of FIG. 1, though various other systems and/or devices may be utilized to implement or perform the method shown in FIG. 9.

[0086] In some examples, server 24 receives a message from controlled device 18 having a controlled device identifier and content information (250). For example, the message from controlled device 18 may contain an SID issued by servers 24 that identifies controlled device 18 as being part of a session. In addition, the message may contain content information intended to notify a user of an event regarding controlled device 18, or to prompt a user of remote control 14 to take an action (e.g., notification that playback has stopped, notification that playback of new content has begun, and the like). The content information may be used, for example, to update a user interface of remote control 14.

[0087] After receiving the message from controlled device 18, server 24 retrieves a remote control identifier that identifies one or more remote controls 14 intended to receive the content information (224). For example, server 24 may query a database of stored identification numbers to determine which remote control 14 is associated with the session

that includes the remote control identifier. Server 24 then transmits a message to the indeed recipients (one or more remote controls 14) of the content information (258). In some examples, server 24 forwards the content information from the first message directly to one or more remote controls 14. In other examples, server 24 may process and/or repackage the content information of the message from controlled device 18 into a new message, which can be sent to the intended recipients of the content information.

[0088] The messages described with respect to FIGS. 5–9 may be may be transmitted according to HTTP protocol. Other protocols, however, may also be implemented. For example, Extensible Messaging and Presence Protocol (XMPP) or Remote Procedure Call (RPC) protocols can also be implemented.

[0089] The techniques described herein may be implemented in hardware, software, firmware, or any combination thereof. Various features described as modules, units or components may be implemented together in an integrated logic device or separately as discrete but interoperable logic devices or other hardware devices. In some cases, various features of electronic circuitry may be implemented as one or more integrated circuit devices, such as an integrated circuit chip or chipset.

[0090] If implemented in hardware, this disclosure may be directed to an apparatus such a processor or an integrated circuit device, such as an integrated circuit chip or chipset. Alternatively or additionally, if implemented in software or firmware, the techniques may be realized at least in part by a computer-readable data storage medium comprising instructions that, when executed, cause a processor to perform one or more of the methods described above. For example, the computer-readable data storage medium may store such instructions for execution by a processor. In various aspects, an article of manufacture may comprise one or more computer-readable media.

[0091] A computer-readable medium may form part of a computer program product, which may include packaging materials. A computer-readable medium may comprise a computer data storage medium such as RAM, ROM, NVRAM, EEPROM, FLASH memory, magnetic or optical data storage media, and the like. The techniques additionally, or alternatively, may be realized at least in part by a computer-readable communication medium that carries or communicates code in the form of instructions or data structures and that can be accessed, read, and/or executed by a computer.

[0092] The code or instructions may be software and/or firmware executed by processing circuitry including one or more processors, such as one or more DSPs, general purpose microprocessors, ASICs, FPGAs, or other equivalent integrated or discrete logic circuitry. Accordingly, the term “processor,” as used herein may refer to any of the foregoing structure or any other structure suitable for implementation of the techniques described herein. In addition, in some aspects, functionality described in this disclosure may be provided within software modules or hardware modules.

[0093] Various examples of the disclosure have been described. These and other embodiments are within the scope of the following claims.

CLAIMS:

1. A method comprising:
 - receiving, by a server, a first message from a remote control that is distinct from and external to the server, wherein the first message includes a remote control identifier that uniquely identifies the remote control, and wherein the first message further includes control information for controlling one or more functions of at least one device other than the remote control;
 - retrieving, by the server, at least one controlled device identifier from a data repository based on the remote control identifier, wherein the at least one controlled device identifier uniquely identifies at least one controlled device that is distinct from and external to the server; and
 - sending a second message from the server to the at least one controlled device identified by the at least one controlled device identifier, wherein the second message is based on the first message and includes the control information to control an operation of the at least one controlled device.
2. The method of claim 1, further comprising:
 - initially assigning, by the server, the remote control identifier to the remote control and the controlled device identifier to the controlled device; and
 - sending the remote control identifier to the remote control and the controlled device identifier to the controlled device prior to receiving messages containing the remote control identifier and the controlled device identifier.
3. The method of claim 1, wherein the second message sent to the at least one controlled device manages playback of at least one of audio content and video content on the at least one controlled device.

4. The method of claim 3, wherein the second message sent to the at least one controlled device causes the at least one controlled device to perform one or more of the following actions: 1) stop playback of content; 2) start playback of content; 3) change content; 4) rate content; and 5) alter a volume associated with content.

5. The method of claim 1, further comprising:

receiving a third message from a controlled device comprising one of the at least one controlled devices, wherein the third message includes a controlled device identifier that uniquely identifies the controlled device;

retrieving a remote control identifier from the data repository based on the controlled device identifier, wherein the remote control identifier uniquely identifies the remote control; and

sending a fourth message to the remote control identified by the remote control identifier, wherein the fourth message is based on the third message received from the controlled device.

6. The method of claim 1, further comprising:

receiving a third message from a controlled device comprising one of the at least one controlled devices, wherein the third message includes a controlled device identifier that uniquely identifies the controlled device;

retrieving a plurality of remote control identifiers from the data repository based on the controlled device identifier, wherein each the plurality of remote control identifiers uniquely identifies one remote control, and wherein one of the plurality of remote control identifiers uniquely identifies the remote control; and

sending a fourth message to each remote control of the plurality of remote controls identified by the plurality of remote control identifiers, wherein the fourth message is based on the third message received from the controlled device.

7. The method of claim 6,
wherein the fourth message sent to each remote control causes each remote control to perform one or more of the following actions: 1) update a user interface of the respective remote control; 2) send a fifth message to the controlled device from which the third message was received to manage playback of audio and video on the controlled device; 3) update a playlist based on the third message received from the controlled device; and 4) send a sixth message to other remote controls identified by the plurality of remote control identifiers.
8. The method of claim 1, further comprising:
receiving an initial message from the remote control that includes a controlled device identifier that uniquely identifies one of the at least one controlled devices, and
storing, in the data repository, an association between the remote control and the one of the at least one controlled devices that is uniquely identified by the controlled device identifier.
9. The method of claim 8, wherein the initial message was generated by the remote control based on a quick reference (QR) code displayed by the one of the at least one controlled devices, and wherein the controlled device identifier corresponds to the QR code.
10. The method of claim 1, wherein the remote control sends and receives messages via a network, and wherein the at least one controlled device sends and receives messages via a different network.
11. The method of claim 1, wherein the controlled device is a network-enabled television.
12. The method of claim 1, wherein the controlled device is a set-top box connected to a television.
13. The method of claim 1, wherein the remote control is a web-enabled cellular telephone.

14. The method of claim 1, wherein the first message and second message follow Hypertext Transfer Protocol (HTTP) protocol.
15. The method of claim 1, wherein the server is a cloud based network server.
16. An article of manufacture comprising a computer-readable storage medium encoded with instructions for causing one or more programmable processors of a computing device to:
 - receive, by a server, a first message from a remote control that is distinct from and external to the server, wherein the first message includes a remote control identifier that uniquely identifies the remote control, and wherein the first message further includes control information for controlling one or more functions of at least one device other than the remote control;
 - retrieve, by the server, at least one controlled device identifier from a data repository based on the remote control identifier, wherein the at least one controlled device identifier uniquely identifies at least one controlled device that is distinct from and external to the server; and
 - send a second message from the server to the at least one controlled device identified by the at least one controlled device identifier, wherein the second message is based on the first message and includes the control information to control an operation of the at least one controlled device.

17. A computing device, comprising:
- one or more processors;
 - a data repository configured to store data;
 - means for receiving, by a server, a first message from a remote control that is distinct from and external to the server, wherein the first message includes a remote control identifier that uniquely identifies the remote control, and wherein the first message further includes control information for controlling one or more functions of at least one device other than the remote control; and
 - a device management module implemented by the one or more processors to retrieve, by the server, at least one controlled device identifier from the data repository based on the remote control identifier, wherein the at least one controlled device identifier uniquely identifies at least one controlled device that is distinct from and external to the server, and send a second message from the server to the at least one controlled device identified by the at least one controlled device identifier, wherein the second message is based on the first message and includes the control information to control an operation of the at least one controlled device.

ABSTRACT

The subject matter of the present disclosure can be implemented in, among other things a computer-readable storage medium encoded with instructions for causing a programmable processor to receive, by a server, a first message from a remote control that is distinct from and external to the server, wherein the first message includes a remote control identifier and control information for controlling one or more functions of at least one device other than the remote control. The instructions also cause the programmable processor to retrieve, by the server, a controlled device identifier that uniquely identifies a controlled device that is distinct from and external to the server. The instructions also cause the programmable processor to send a second message from the server to the controlled device identified by the controlled device identifier to control an operation of the controlled device.

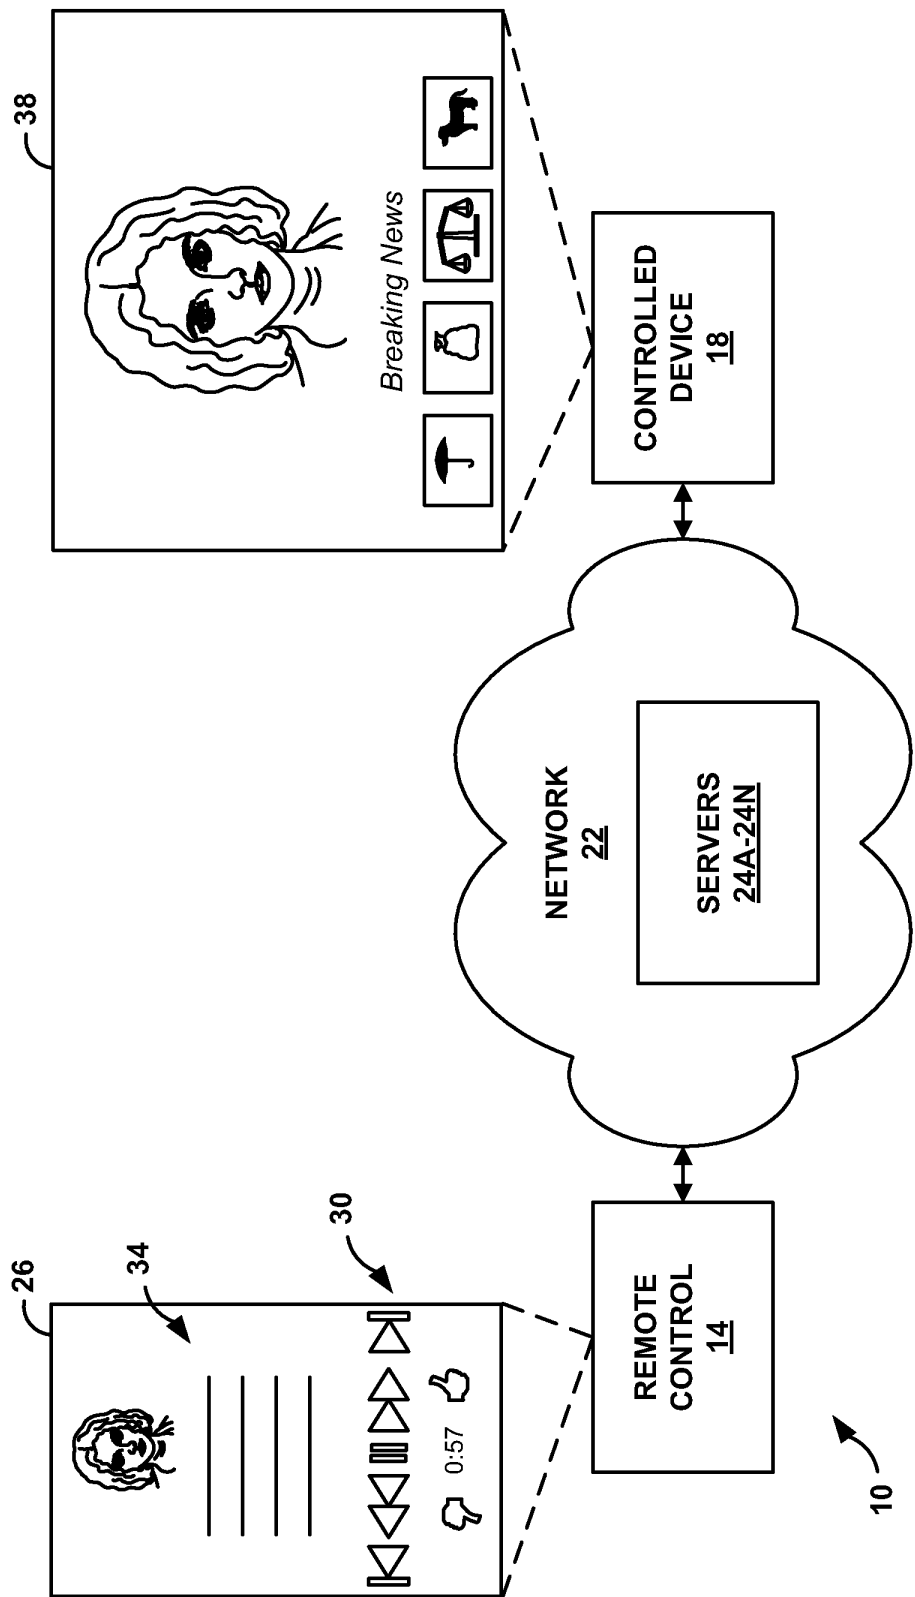


FIG. 1

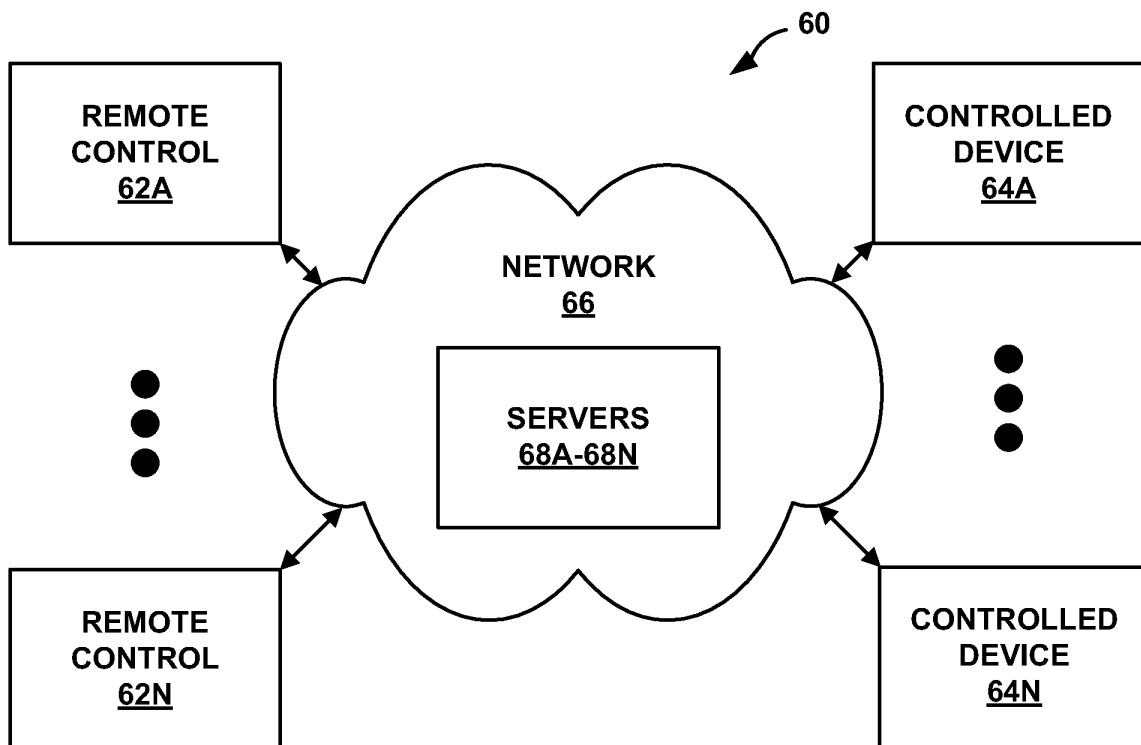


FIG. 2

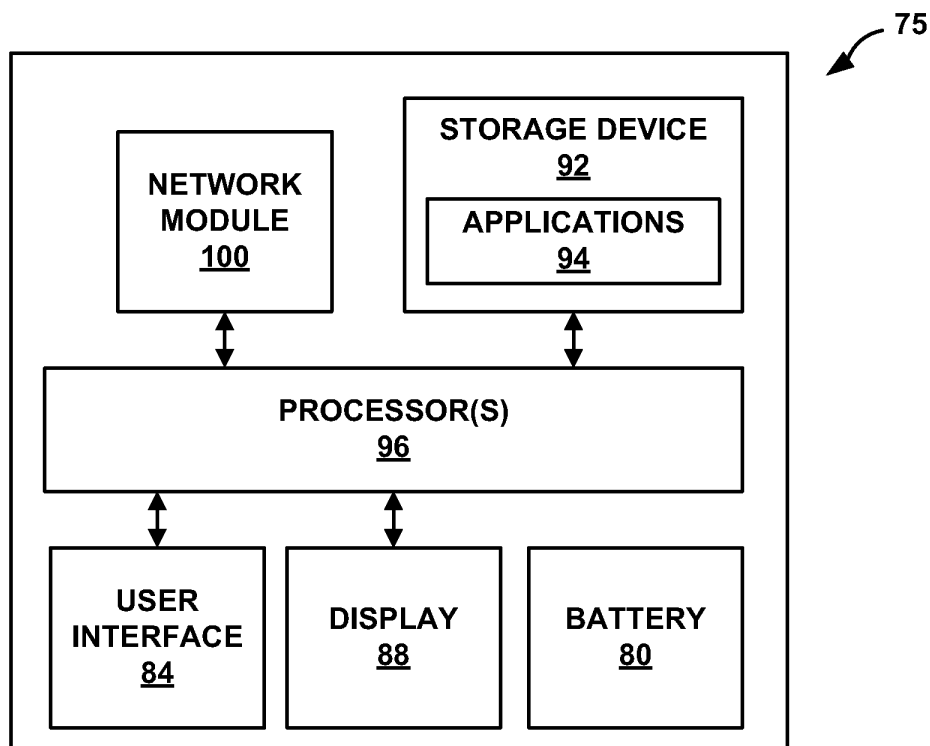


FIG. 3

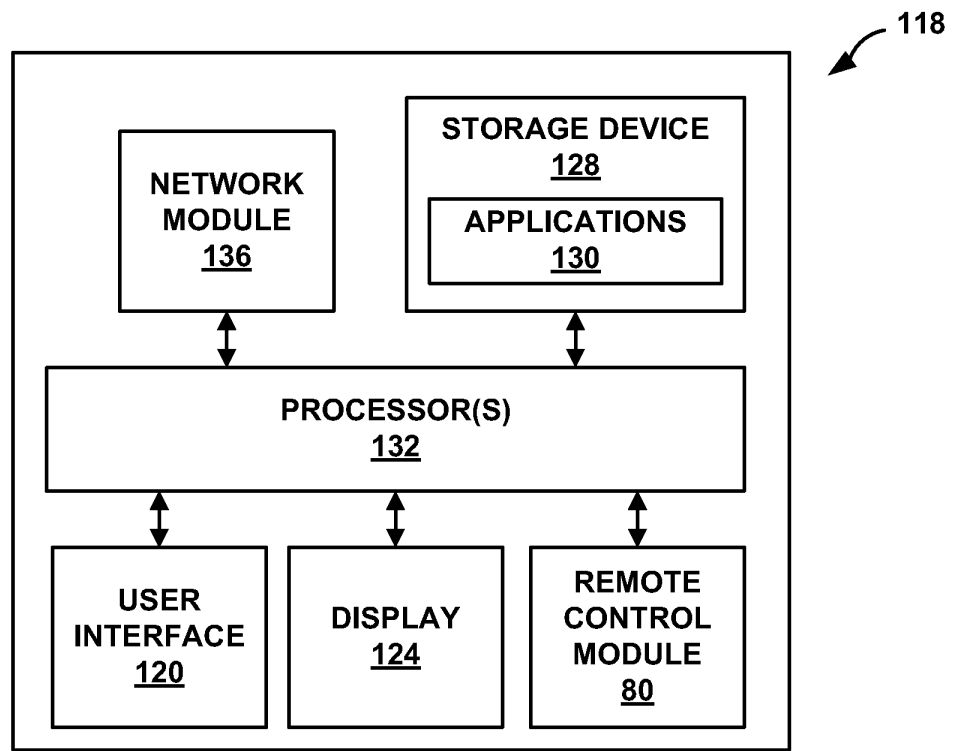


FIG. 4

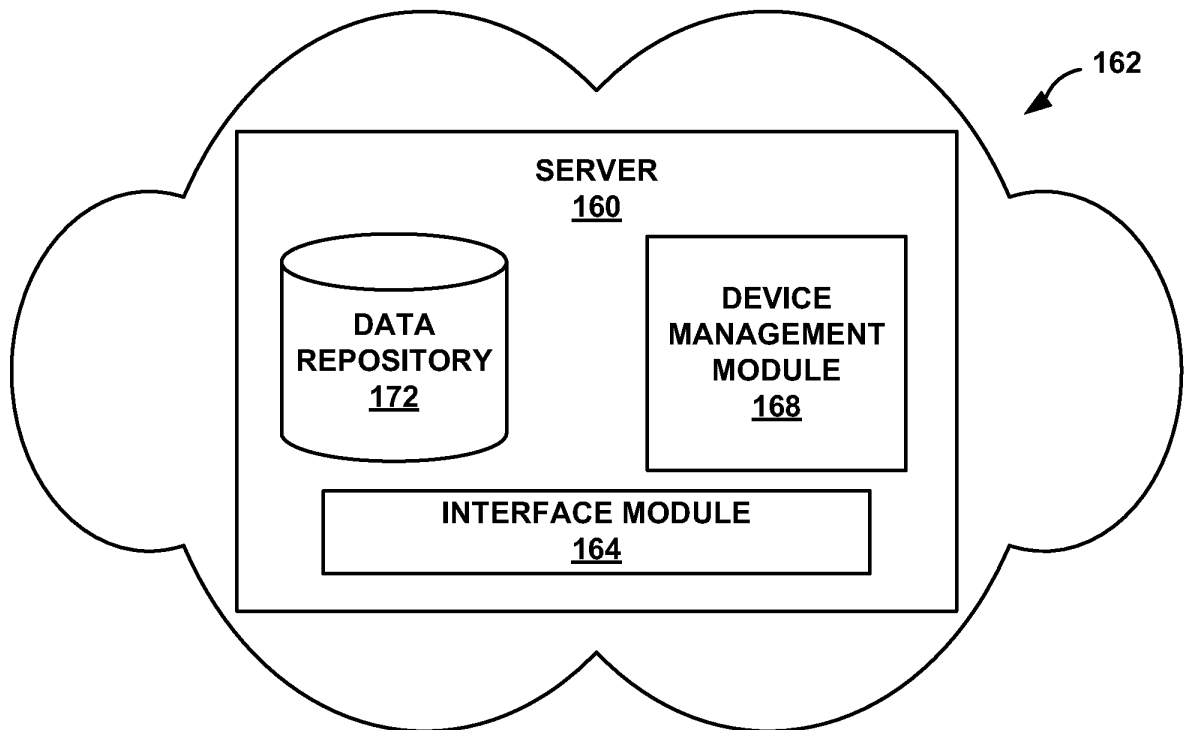


FIG. 5

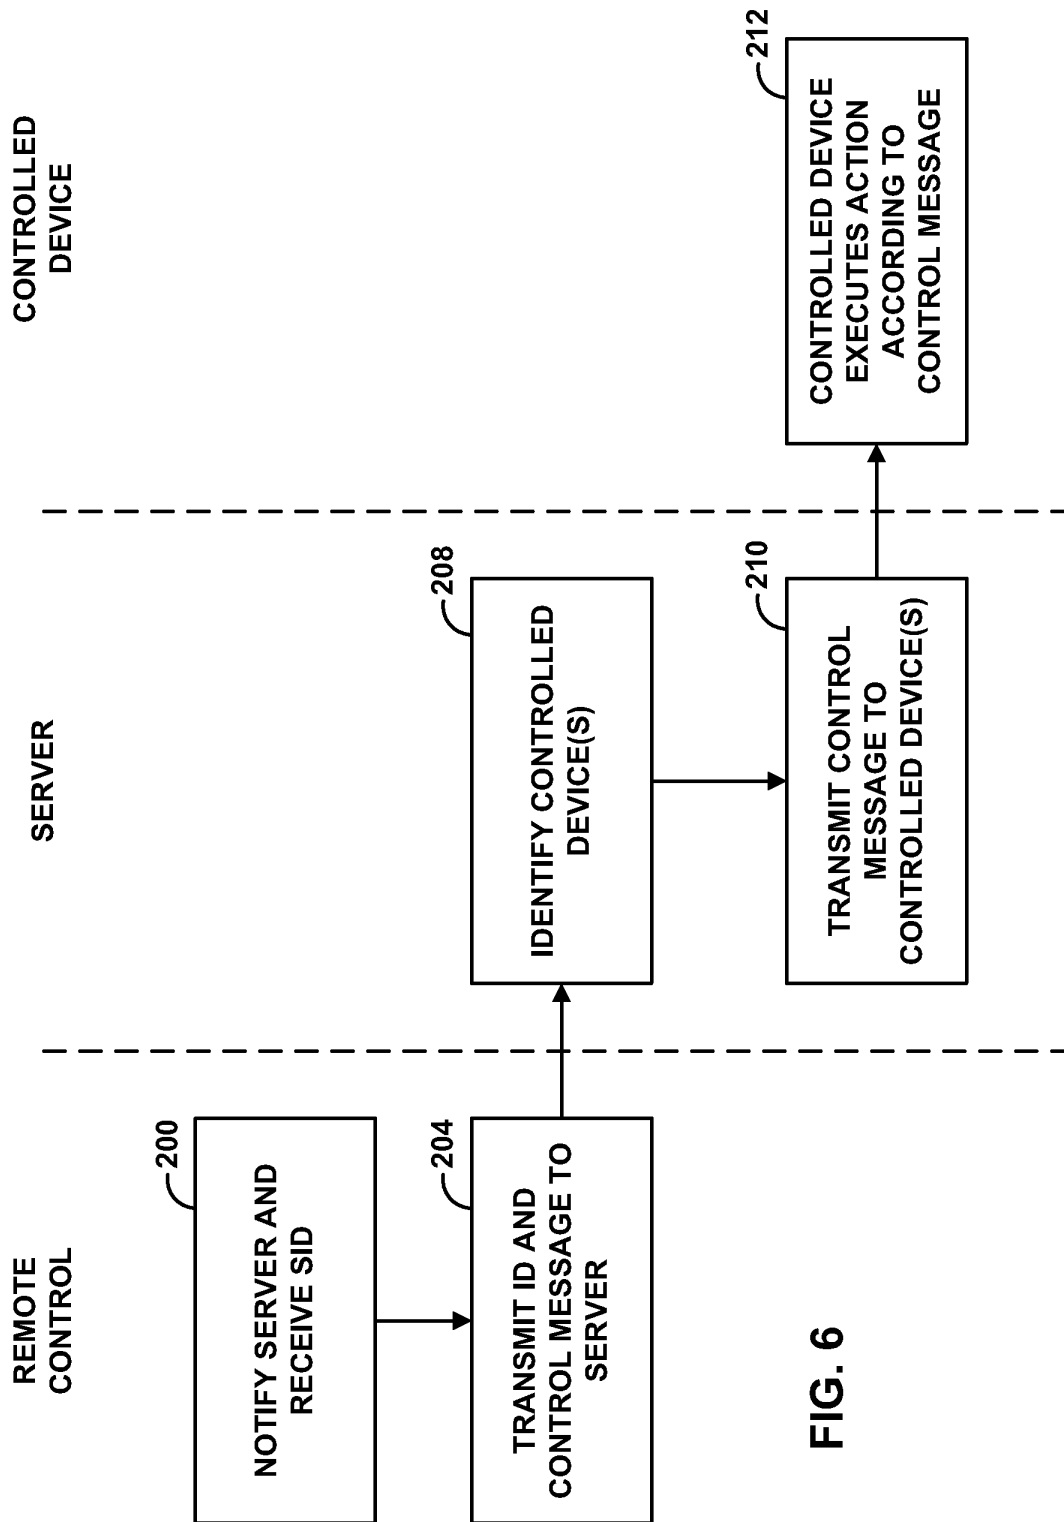


FIG. 6

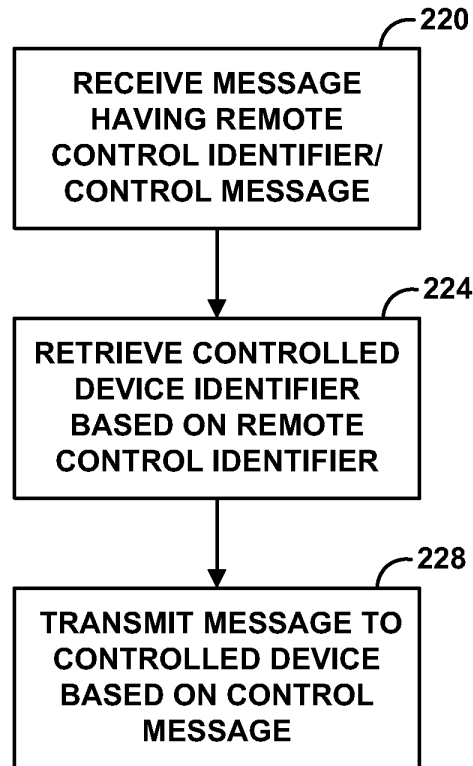


FIG. 7

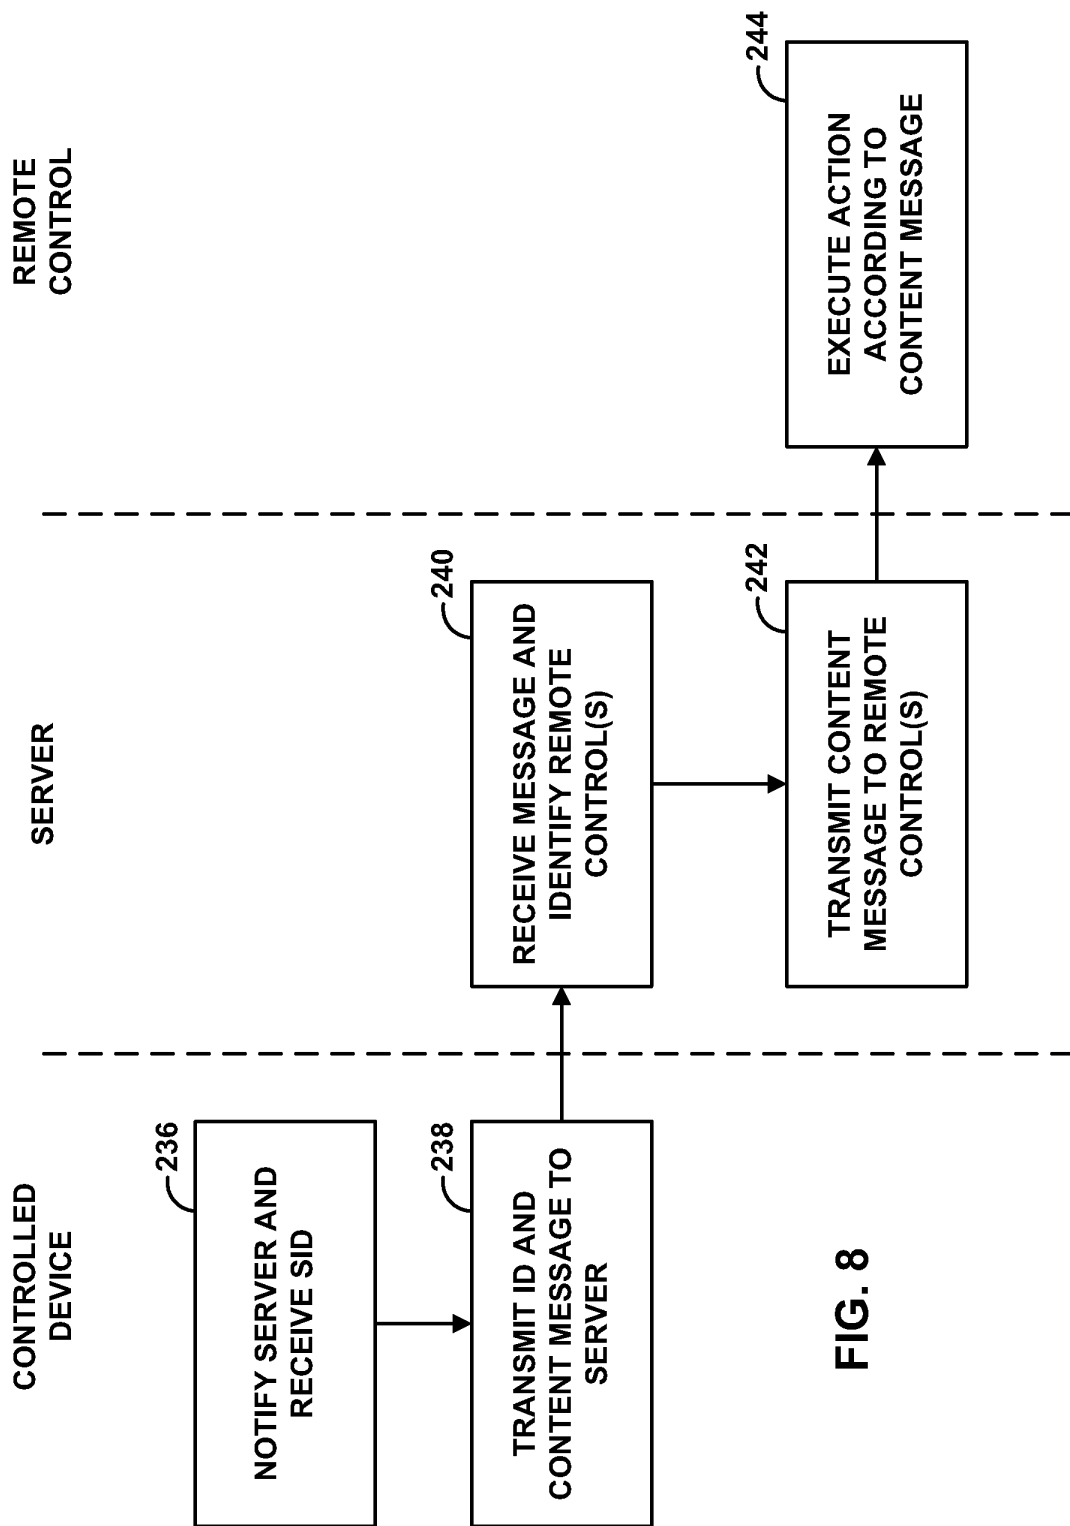


FIG. 8

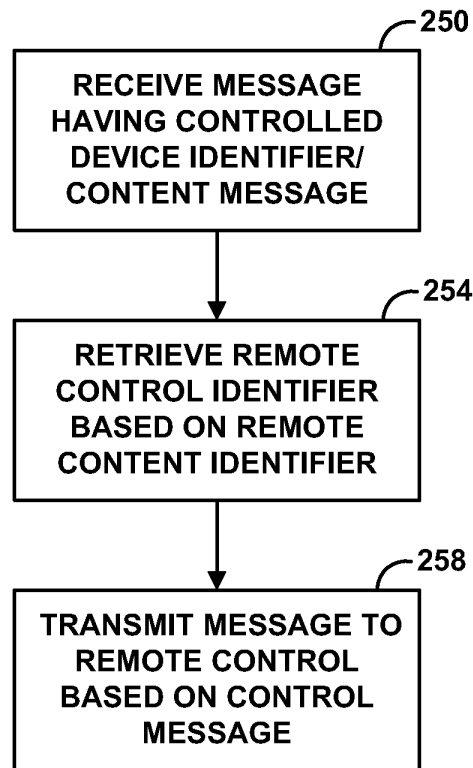


FIG. 9

Electronic Patent Application Fee Transmittal				
Application Number:				
Filing Date:				
Title of Invention:		NETWORK-BASED REMOTE CONTROL		
First Named Inventor/Applicant Name:		Daniel Danciu		
Filer:		Raymond R. Berdie/Renee Whittaker		
Attorney Docket Number:		1133-051USP1		
Filed as Large Entity				
Provisional Filing Fees				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Provisional application filing	1005	1	220	220
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Total in USD (\$)				220

Electronic Acknowledgement Receipt	
EFS ID:	8794333
Application Number:	61411386
International Application Number:	
Confirmation Number:	1604
Title of Invention:	NETWORK-BASED REMOTE CONTROL
First Named Inventor/Applicant Name:	Daniel Danciu
Customer Number:	98449
Filer:	Raymond R. Berdie/Renee Whittaker
Filer Authorized By:	Raymond R. Berdie
Attorney Docket Number:	1133-051USP1
Receipt Date:	08-NOV-2010
Filing Date:	
Time Stamp:	18:50:13
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$220
RAM confirmation Number	5855
Deposit Account	501778
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows: Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)	

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Provisional Cover Sheet (SB16)	ProvisionalCoverSheet.pdf	1001079	no	3
			29937e28e3f684a32f6e46095ca359e36e05a6e1		
Warnings:					
Information:					
2		Application.pdf	82743	yes	34
			17e8f77c3ae1d6e2a5dbda1a73acce1d67b489ce		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	28	
	Claims		29	33	
	Abstract		34	34	
Warnings:					
Information:					
3	Drawings-only black and white line drawings	Drawings.pdf	41325	no	7
			493365ce3056e1dd0a532762a24137b909f940fb		
Warnings:					
Information:					
4	Fee Worksheet (PTO-875)	fee-info.pdf	29477	no	2
			36da9831146a72c8c095f468369d256331ec5fac		
Warnings:					
Information:					
Total Files Size (in bytes):			1154624		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY DOCKET NO	TOT CLAIMS	IND CLAIMS
61/411,386	11/08/2010		220	1133-051USP1		

CONFIRMATION NO. 1604

98449

Shumaker & Sieffert, P.A.
1625 Radio Drive, Suite 300
Woodbury, MN 55125

FILING RECEIPT



0000000044517208

Date Mailed: 11/22/2010

Receipt is acknowledged of this provisional patent application. It will not be examined for patentability and will become abandoned not later than twelve months after its filing date. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Applicant(s)

Daniel Danciu, Zurich, SWITZERLAND;

Power of Attorney:

Raymond Berdie--50769

If Required, Foreign Filing License Granted: 11/16/2010

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 61/411,386**

Projected Publication Date: None, application is not eligible for pre-grant publication

Non-Publication Request: No

Early Publication Request: No
Title

NETWORK-BASED REMOTE CONTROL

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international

patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and

Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY TO PROSECUTE APPLICATIONS BEFORE THE USPTO

I hereby revoke all previous powers of attorney given in the application identified in the attached statement under 37 CFR 3.73(b).

I hereby appoint:



Practitioners associated with the Customer Number:

104433

OR



Practitioner(s) named below (if more than ten patent practitioners are to be named, then a customer number must be used):

Name	Registration Number	Name	Registration Number

as attorney(s) or agent(s) to represent the undersigned before the United States Patent and Trademark Office (USPTO) in connection with any and all patent applications assigned only to the undersigned according to the USPTO assignment records or assignment documents attached to this form in accordance with 37 CFR 3.73(b).

Please change the correspondence address for the application identified in the attached statement under 37 CFR 3.73(b) to:



The address associated with Customer Number:

104433

OR

☐ Firm or Individual Name			
Address			
City	State	Zip	
Country			
Telephone	Email		


Assignee Name and Address:

Google Inc.
1600 Amphitheatre Parkway
Mountain View, CA 94043

A copy of this form, together with a statement under 37 CFR 3.73(b) (Form PTO/SB/86 or equivalent) is required to be filed in each application in which this form is used. The statement under 37 CFR 3.73(b) may be completed by one of the practitioners appointed in this form if the appointed practitioner is authorized to act on behalf of the assignee, and must identify the application in which this Power of Attorney is to be filed.

SIGNATURE of Assignee of Record

The individual whose signature and title is supplied below is authorized to act on behalf of the assignee

Signature		Date	Aug. 8, 2012
Name	Donald Harrison	Telephone	650-253-0000
Title	Vice President, Deputy General Counsel & Assistant Secretary		

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



Electronic Acknowledgement Receipt

EFS ID:	33365289
Application Number:	61411386
International Application Number:	
Confirmation Number:	1604
Title of Invention:	NETWORK-BASED REMOTE CONTROL
First Named Inventor/Applicant Name:	Daniel Danciu
Customer Number:	98449
Filer:	Philip R. Poh/Yuqing Zheng
Filer Authorized By:	Philip R. Poh
Attorney Docket Number:	1133-051USP1
Receipt Date:	03-AUG-2018
Filing Date:	08-NOV-2010
Time Stamp:	14:03:26
Application Type:	Provisional

Payment information:

Submitted with Payment	no
------------------------	----

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Assignee showing of ownership per 37 CFR 3.73	00201530.PDF	428127	no	2
			a60687b03be2d91ed54314924f328b20f0c09b1f		

Warnings:

Information:					
2	Power of Attorney	00201554.PDF	329857	no	1
			c54cc1b99aa81f4e381be76403dffd2b309c148		
Warnings:					
Information:					
Total Files Size (in bytes):				757984	
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					

STATEMENT UNDER 37 CFR 3.73(b)

Applicant/Patent Owner: Daniel Danciu et al.

Application No./Patent No.: 61/411,386

Filed/Issue Date: 11/8/2010

Titled:
NETWORK-BASED REMOTE CONTROL

Google LLC, a corporation

(Name of Assignee)

(Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

states that it is:

1. ☒ the assignee of the entire right, title, and interest in;
2. ☐ an assignee of less than the entire right, title, and interest in
(The extent (by percentage) of its ownership interest is _____ %); or
3. ☐ the assignee of an undivided interest in the entirety of (a complete assignment from one of the joint inventors was made)

the patent application/patent identified above, by virtue of either:

- A. ☐ An assignment from the inventor(s) of the patent application/patent identified above. The assignment was recorded in the United States Patent and Trademark Office at Reel _____, Frame _____, or for which a copy therefore is attached.

OR

- B. ☒ A chain of title from the inventor(s), of the patent application/patent identified above, to the current assignee as follows:

1. From: Daniel Danciu et al.

To: Google Inc.

The document was recorded in the United States Patent and Trademark Office at

Reel 026031, Frame 0567, or for which a copy thereof is attached.

2. From: Google Inc.

To: Google LLC

The document was recorded in the United States Patent and Trademark Office at

Reel 044097, Frame 0658, or for which a copy thereof is attached.

3. From: _____

To: _____

The document was recorded in the United States Patent and Trademark Office at

Reel _____, Frame _____, or for which a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet(s).

- ☒ As required by 37 CFR 3.73(b)(1)(i), the documentary evidence of the chain of title from the original owner to the assignee was, or concurrently is being, submitted for recordation pursuant to 37 CFR 3.11.

[NOTE: A separate copy (i.e., a true copy of the original assignment document(s)) must be submitted to Assignment Division in accordance with 37 CFR Part 3, to record the assignment in the records of the USPTO. See MPEP 302.08]

The undersigned (whose title is supplied below) is authorized to act on behalf of the assignee.

/Philip R Poh/

08/03/2018

Signature

Date

Philip R. Poh

Attorney - 51,176

Printed or Typed Name

Title

This collection of information is required by 37 CFR 3.73(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
61/411,386	11/08/2010	Daniel Danciu	1133-051USP1

CONFIRMATION NO. 1604

POA ACCEPTANCE LETTER



OC000000101530716*

Date Mailed: 08/08/2018

104433
Byrne Poh LLP/Google LLC
11 Broadway Ste 760
New York, NY 10004

NOTICE OF ACCEPTANCE OF POWER OF ATTORNEY

This is in response to the Power of Attorney filed 08/03/2018.

The Power of Attorney in this application is accepted. Correspondence in this application will be mailed to the above address as provided by 37 CFR 1.33.

Questions about the contents of this notice and the requirements it sets forth should be directed to the Office of Data Management, Application Assistance Unit, at (571) 272-4000 or (571) 272-4200 or 1-888-786-0101.

/nbekele/