

13281
012204

U.S. PTO

PTO/SB/17 (10-03)

Approved for use through 07/31/2006. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL
for FY 2004**

Effective 10/01/2003. Patent fees are subject to annual revision.

☒ Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT (\$) 1,605

Complete if Known

Application Number	To Be Assigned
Filing Date	01/22/04
First Named Inventor	Bandy et al.
Examiner Name	To Be Assigned
Art Unit	To Be Assigned
Attorney Docket No.	1689.0360001

METHOD OF PAYMENT (check all that apply)☐ Check ☒ Credit card ☐ Money Order ☒ Other** ☐ None☐ **Charge any deficiencies or credit any overpayments in the fees to Deposit Acct. No. 19-0036.Deposit Account Number 19-0036
Deposit Account Name Sterne Kessler, Goldstein & Fox P.L.L.C.

The Director is authorized to: (check all that apply)

☐ Charge fee(s) indicated below ☐ Credit any overpayments☐ Charge any additional fee(s) or any underpayment of fee(s)☐ Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
1001	770	2001	385	Utility filing fee	385
1002	340	2002	170	Design filing fee	
1003	530	2003	265	Plant filing fee	
1004	770	2004	385	Reissue filing fee	
1005	160	2005	80	Provisional filing fee	
SUBTOTAL (1)				(\$)	385

2. EXTRA CLAIM FEES FOR UTILITY AND REISSUE

Total Claims		Extra Claims		Fee from below		Fee Paid
Independent Claims	103	- 20	**= 83	X	9	747
Multiple Dependent Claims	14	- 3	**= 11	X	43	473

Large Entity		Small Entity		Fee Description
Fee Code	Fee (\$)	Fee Code	Fee (\$)	
1202	18	2202	9	Claims in excess of 20
1201	86	2201	43	Independent claims in excess of 3
1203	290	2203	145	Multiple dependent claim, if not paid
1204	86	2204	43	** Reissue independent claims over original patent
1205	18	2205	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$)

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Entity Small Entity

Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Description	Fee Paid
1051	130	2051	65	Surcharge - late filing fee or oath	
1052	50	2052	25	Surcharge - late provisional filing fee or cover sheet	
1053	130	1053	130	Non-English specification	
1812	2,520	1812	2,520	For filing a request for ex parte reexamination	
1804	920*	1804	920*	Requesting publication of SIR prior to Examiner action	
1805	1,840*	1805	1,840*	Requesting publication of SIR after Examiner action	
1251	110	2251	55	Extension for reply within first month	
1252	420	2252	210	Extension for reply within second month	
1253	950	2253	475	Extension for reply within third month	
1254	1,480	2254	740	Extension for reply within fourth month	
1255	2,010	2255	1,005	Extension for reply within fifth month	
1401	330	2401	165	Notice of Appeal	
1402	330	2402	165	Filing a brief in support of an appeal	
1403	290	2403	145	Request for oral hearing	
1451	1,510	1451	1,510	Petition to institute a public use proceeding	
1452	110	2452	55	Petition to revive - unavoidable	
1453	1,330	2453	665	Petition to revive - unintentional	
1501	1,330	2501	665	Utility issue fee (or reissue)	
1502	480	2502	240	Design issue fee	
1503	640	2503	320	Plant issue fee	
1460	130	1460	130	Petitions to the Commissioner	
1807	50	1807	50	Processing fee under 37 CFR 1.17(q)	
1806	180	1806	180	Submission of Information Disclosure Stmt	
8021	40	8021	40	Recording each patent assignment per property (times number of properties)	
1809	770	2809	385	Filing a submission after final rejection (37 CFR 1.129(a))	
1810	770	2810	385	For each additional invention to be examined (37 CFR 1.129(b))	
1801	770	2801	385	Request for Continued Examination (RCE)	
1802	900	1802	900	Request for expedited examination of a design application	

Other fee (specify)

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

SUBMITTED BY

(Complete if applicable)

Name (Print/Type)	Jeffrey S. Weaver	Registration No. (Attorney/Agent)	45,608	Telephone	(202) 371-2600
Signature		Date	1-22-04		

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



Robert Greene Sterne
Edward J. Kessler
Jorge A. Goldstein
David K.S. Comwell
Robert W. Esmond
Tracy-Gene G. Durkin
Michele A. Cimbala
Michael B. Ray
Robert E. Sokohl
Eric K. Steffe
Michael Q. Lee
Steven R. Ludwig
John M. Covert
Linda E. Alcorn
Robert C. Millonig
Lawrence B. Bugaisky
Donald J. Featherstone
Michael V. Messinger

Judith U. Kim
Timothy J. Shea, Jr.
Patrick E. Garrett
Heidi L. Kraus
Edward W. Yee
Albert L. Ferro*
Donald R. Banowit
Peter A. Jackman
Molly A. McCall
Teresa U. Medler
Jeffrey S. Weaver
Kendrick P. Patterson
Vincent L. Capuano
Eldora Ellison Floyd
Thomas C. Fiala
Brian J. Del Buono
Virgil Lee Beaston
Kimberly N. Reddick

Theodore A. Wood
Elizabeth J. Haanes
Joseph S. Ostroff
Frank R. Cottingham
Christine M. Uhulier
Rae Lynn Prengaman
Jane Shershenovich*
Lawrence J. Carroll*
George S. Bardmesser
Daniel A. Klein*
Jason D. Eisenberg
Michael D. Specht
Andrea J. Kamage
Tracy L. Muller*
LuAnne M. Yuricek*
John J. Figueroa
Ann E. Summerfield
Tiera S. Coston*

Aric W. Ledford*
Registered Patent Agents*
Karen R. Markowicz
Nancy J. Leith
Helene C. Carlson
Gaby L. Longworth
Matthew J. Dowd
Aaron L. Schwartz
Mary B. Tung
Katrina Y. Pei Quach
Bryan L. Skelton
Robert A. Schwartzman
Timothy A. Doyle
Jennifer R. Mahalingappa
Teresa A. Colella
Jeffrey S. Lundgren

Victoria S. Rutherford
Eric D. Hayes

Of Counsel
Kenneth C. Bass III
Evan R. Smith

*Admitted only in Maryland
*Admitted only in Virginia
•Practice Limited to
Federal Agencies

January 22, 2004

WRITER'S DIRECT NUMBER:
(202) 772-8831
INTERNET ADDRESS:
JWEAVER@SKGF.COM

Commissioner for Patents
PO Box 1450
Alexandria, VA 22313-1450

Mail Stop Patent Application

Re: U.S. Non-Provisional Utility Patent Application under 37 C.F.R. § 1.53(b)
Appl. No. *To Be Assigned*; Filed: January 22, 2004
For: **Radio Frequency Identification (RFID) Based Sensor Networks**
Inventors: Bandy *et al.*
Our Ref: 1689.0360001

Sir:

The following documents are forwarded herewith for appropriate action by the U.S. Patent and Trademark Office:

1. PTO Fee Transmittal (Form PTO/SB/17);
2. PTO Utility Patent Application Transmittal (Form PTO/SB/05);
3. U.S. Utility Patent Application entitled:

Radio Frequency Identification (RFID) Based Sensor Networks

and naming as inventors:

William R. Bandy and John P. Peeters

the application consisting of:

- a. An Application Data Sheet (37 C.F.R. § 1.76);
- b. A specification containing:
 - i. forty-two pages of description prior to the claims;
 - ii. fifteen pages of claims (103 claims);

- iii. a one (1) page abstract;
- c. Nineteen sheets of drawings: (Figures 1, 2, 2A, 3, 4A, 4B, 4C, 5, 6, 7A, 7B, 8, 9, 10, 11, 12, 13A, 13B, 14, 15, 16 and 17); and
- 4. Authorization to Treat a Reply As Incorporating An Extension of Time Under 37 C.F.R. § 1.136(a)(3);
- 5. An Information Disclosure Statement (IDS);
- 6. Form PTO-1449 (2 pages) listing cited documents;
- 7. Form PTO-2038 Credit Card Payment Form in the amount of \$1,605.00, to cover:
\$385.00 Filing Fee;
\$747.00 Extra Claims (83);
\$473.00 Extra Independent Claims (11); and
- 8. Copies of eight (8) cited documents; and
- 9. Two (2) return postcards.

It is respectfully requested that, of the two attached postcards, one be stamped with the filing date of these documents and returned to our courier, and the other, prepaid postcard, be stamped with the filing date and unofficial application number and returned as soon as possible. The U.S. Patent and Trademark Office is hereby authorized to charge any fee deficiency, or credit any overpayment, to our Deposit Account No. 19-0036.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.



Jeffrey S. Weaver
Attorney for Applicants
Registration No. 45,608

JSW/LAG/mhd

222207



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Bandy *et al.*

Appl. No.: *To Be Assigned*

Filed: January 22, 2004

For: **Radio Frequency Identification
(RFID) Based Sensor Networks**

Confirmation No.: *To Be Assigned*

Art Unit: *To Be Assigned*

Examiner: *To Be Assigned*

Atty. Docket: 1689.0360001

**Authorization to Treat a Reply as Incorporating an
Extension of Time Under 37 C.F.R. § 1.136(a)(3)**

Commissioner for Patents
PO Box 1450
Alexandria, VA 22313-1450

Sir:

The U.S. Patent and Trademark Office is hereby authorized to treat any concurrent or future reply that requires a petition for an extension of time under this paragraph for its timely submission, as incorporating a petition for extension of time for the appropriate length of time. The U.S. Patent and Trademark Office is hereby authorized to charge all required extension of time fees to our Deposit Account No. 19-0036, if such fees are not otherwise provided for in such reply.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.

Jeffrey S. Weaver
Attorney for Applicants
Registration No. 45,608

Date: 1-22-04

1100 New York Avenue, N.W.
Washington, D.C. 20005-3934
(202) 371-2600

222224

RADIO FREQUENCY IDENTIFICATION (RFID) BASED SENSOR NETWORKS

Inventors: William R. Bandy
John P. Peeters

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 60/513,740, entitled "Low Cost Distributed Chemical RFID Sensor Networks," filed October 24, 2003, which is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

[0002] The present invention relates generally to sensor networks and specifically to radio frequency identification (RFID) based sensor networks.

BACKGROUND OF THE INVENTION

[0003] The ability of wireless sensors to remotely provide data in real-time opens up a wide variety of health and safety applications. From the perspective of an individual, the ability to determine, prior to consumption, whether a food item contains harmful bacteria or ingredients to which the individual is allergic is highly desirable. From a community perspective, recent national and international events have increased the need for distributed systems for the continuous, real-time monitoring and detection of chemical agents, biological agents, radiological agents, and other hazards over wide geographical areas.

[0004] Because of the cost of sensors and sensor readers, broad deployment of a sensor network over a large geographical area or widespread use by individuals is currently not feasible. In addition, the

imprecision of sensors generally requires cross validation to eliminate false positives, adding to the number of sensors that must be deployed for each application. Another problem with large geographical deployment is that the wear of sensors or sensor surfaces requires sensors to be replaced on a regular basis, adding to the cost.

[0005] Hence, what is needed is a wireless sensor that is inexpensive, small, and flexible. Furthermore, what is needed is a sensor reader that is inexpensive and accessible to the general population.

[0006] The need also exists for distributed sensor networks for the real time monitoring and detection of hazardous materials and/or conditions in a highly cost effective way.

BRIEF SUMMARY OF THE INVENTION

[0007] The present invention is directed to a radio frequency (RF) addressable sensor network architecture where a reader communicates with and powers RF addressable sensors. The present invention is also directed to RF addressable sensors that may be produced at costs lower than most types of sensors that are currently available.

[0008] In accordance with aspects of the present invention, the RF addressable sensor network includes one or more RF addressable sensors, one or more wireless sensor readers coupled to a communications network, and one or more optional end user devices coupled to the communications network. In an aspect of the present invention, the communications network is a publicly accessible communications network. In another aspect, the communications network is a private network or is a hybrid network having both public and private portions. The wireless sensor readers communicate with the RF addressable sensors via RF signals. The wireless sensor readers also communicate with the communications network via a wireless air interface protocol or via a wired data communications protocol. In another aspect of the invention, the RF addressable sensor network includes a sensor network processor having sensor data processing logic and geolocation processing logic.

[0009] The RF addressable sensor combines radio frequency identification (RFID) tag functionality and sensor functionality. The RF addressable sensor includes one or more antennas for communicating with the wireless sensor reader, one or more sensor elements, an RF power and communications interface, an RFID control module, and a sensor interface. The RFID control module includes RFID logic to control RFID tag communications with the wireless sensor reader and/or a conventional RFID tag reader. The RFID control module may also include logic to process sensor data. In another aspect of the invention, the RF addressable sensor includes one or more reference elements coupled in parallel with the sensor elements.

[0010] The present invention is also directed to a wireless sensor reader. According to aspects of the present invention, the wireless sensor reader includes one or more antennas, a user interface, a controller, a network communications module, and an RF addressable sensor logic module. The network communications module is configured to provide communication with a communications network. The RF addressable sensor logic module controls communication with the RF addressable sensors. The wireless sensor reader is implemented in a wireless device such as a phone or PDA. In an aspect of the invention, the RF addressable sensor logic module is integrated into the device either by design or by downloading the sensor logic into a programmable processor located on the device. In another aspect of the invention, RF addressable sensor logic module is coupled to the device via an interface.

[0011] The present invention is also directed to a method for communicating sensor data in a RFID based sensor network. In accordance with an aspect of the present invention, a read of one or more RF addressable sensors is initiated at the wireless sensor reader. The wireless sensor reader then communicates signals to the RF addressable sensors to initialize and power the sensors. The wireless sensor reader then isolates an individual RF addressable sensor. In an aspect of the present invention, the wireless sensor reader signals the

isolated RF addressable sensor to obtain sensor data. The RF addressable sensor then communicates the sensor data to the wireless sensor reader. The wireless sensor reader may perform additional processing on the data or may communicate the data to the network sensor processor for additional processing. In some aspects of the present invention, the received sensor data and/or processed sensor data can be displayed on the wireless sensor reader. In another aspect of the present invention, the original sensor data and/or the processed sensor data are communicated to a processor and/or end-user device coupled to the communications network.

[0012] These and other objects, advantages and features will become readily apparent in view of the following detailed description of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS/FIGURES

[0013] The accompanying drawings, which are incorporated herein and form a part of the specification, illustrate the present invention and, together with the description, further serve to explain the principles of the invention and to enable a person skilled in the pertinent art to make and use the invention.

[0014] FIG. 1 is a block diagram of an illustrative RF addressable sensor network according to an embodiment of the present invention.

[0015] FIG. 2 is a block diagram of an illustrative RF addressable sensor according to embodiments of the present invention.

[0016] FIG. 2A is a block diagram of an illustrative RF addressable sensor having an external sensor element according to embodiments of the present invention.

[0017] FIG. 3 is a block diagram of a wireless sensor reader according to embodiments of the present invention.

[0018] FIG. 4A, 4B, and 4C are block diagrams of illustrative wireless sensor reader configurations according to embodiments of the present invention.

- [0019] FIG. 5 is a flowchart illustrating an operational sequence of RF addressable sensor read communications from the perspective of the wireless sensor reader according to an embodiment of the present invention.
- [0020] FIG. 6 is a flowchart illustrating a method for remotely initiating a sensor read over a communications network according to an embodiment of the present invention.
- [0021] FIG. 7A is a flowchart illustrating a method of RF addressable sensor read communications from the perspective of a basic single RF addressable sensor according to an embodiment of the present invention.
- [0022] FIG. 7B is a flowchart illustrating a method of RF addressable sensor read communications from the perspective of an RF addressable sensor having local processing capabilities according to an embodiment of the present invention.
- [0023] FIG. 8 depicts a block diagram of a homeland security sensor network application having geolocation capabilities, according to an example embodiment of the present invention.
- [0024] FIG. 9 is a flowchart illustrating a method of sensing the presence of dangerous agents in a homeland security sensor network, according to an example embodiment of the present invention.
- [0025] FIG. 10 depicts a block diagram of an application of a sensor network for the remote monitoring of shipping containers, according to an example embodiment of the present invention.
- [0026] FIG. 11 depicts a block diagram of an application of a sensor network for remote monitoring smart cards or badges having one or more RF addressable sensors, according to an example embodiment of the present invention.
- [0027] FIG. 12 depicts a block diagram of an application of a sensor network for remote monitoring of the contents of a network appliance, according to an example embodiment of the present invention.
- [0028] FIG. 13A depicts a block diagram of an example real-time food testing application, according to an example embodiment of the present invention.

[0029] FIG. 13B depicts a block diagram of a network-based food testing application, according to an example embodiment of the present invention.

[0030] FIG. 14 depicts a block diagram of an example application of a sensor network for identifying potential interactions among prescribed drugs, according to an example embodiment of the present invention.

[0031] FIG. 15 depicts a block diagram of an example application of a sensor network for remote sensing of hazardous conditions, according to an example embodiment of the present invention.

[0032] FIG. 16 depicts a block diagram of an example application of a sensor network for shopping, according to an example embodiment of the present invention.

[0033] FIG. 17 depicts a block diagram of an example application of a sensor network for monitoring structures, according to an example embodiment of the present invention.

[0034] The present invention will now be described with reference to the accompanying drawings. In the drawings, like reference numbers can indicate identical or functionally similar elements. Additionally, the left-most digit(s) of a reference number may identify the drawing in which the reference number first appears.

DETAILED DESCRIPTION OF THE INVENTION

1. Architectural Embodiments of the Present Invention

[0035] Various embodiments for RF addressable sensor networks, RF addressable sensors, and RF addressable sensor readers are described in the following subsections. These embodiments are provided for illustrative purposes, and it should be understood that the invention is not limited to the particular embodiments described below. Alternative embodiments for RF addressable sensor networks, RF addressable sensors, and RF addressable sensor readers will be apparent to persons skilled in the relevant arts based on the teachings herein, including those with equivalents, combinations, modifications, greater or fewer

components, etc. It is to be understood that such alternative embodiments are within the scope and spirit of the present invention.

1.1 RF Addressable Sensor Network

[0036] FIG. 1 is a block diagram of an illustrative RF addressable sensor network 100 for monitoring, detecting, and geolocating RF addressable sensors, according to an embodiment of the present invention. Network 100 includes a population of RF addressable sensors 102, one or more wireless addressable sensor readers 140, and a communications network 180. In an embodiment of the present invention, communications network 180 is a publicly accessible communications network. In another embodiment, communications network 180 is a private network or a hybrid network including public and private portions. Communications network 180 includes a wireless communications network 170 and/or a data communications network 175. While FIG. 1 depicts communications network 180 as including a wireless and a data communications network, persons skilled in the relevant art(s) will recognize that other network architectures could be used with the present invention.

[0037] In an embodiment, end user devices 182 may be coupled to communications network 180. End user devices 182 include logic for bi-directional communication with the communications network 180. End user devices 182 may be present to initiate a request for sensor data from RF addressable sensors 102 by making the request to readers 140 over network 180. In an embodiment, end user devices 182 also include logic to process received sensor data. For example, a user device 182 may include features of a processor 190, which is further described below. Thus, in an embodiment, a user device 182 may both initiate a request for sensor data and receive and process the resulting sensor data. End user devices 182 can communicate with communications network 180 via a wireless link 184 or a wired link 186. In an alternate embodiment, network 100 also includes a sensor network processor 190.

[0038] According to embodiments of the present invention, the population of RF addressable sensors 102 may include any number of one or more RF addressable sensors 110. RF addressable sensors 110 integrate RFID tag functionality and sensor functionality. RF addressable sensor 110 may be attached to the exterior of an item, inserted into an item (e.g., immersed in a liquid), or may be stand-alone.

[0039] Wireless sensor reader 140 includes logic to interrogate the population of RF addressable sensors 102 and logic to read sensor data and RFID tag data transmitted by the RF addressable sensors 110. In an embodiment, wireless sensor reader 140 also includes logic to process the received sensor data. Wireless sensor reader 140 can be any wireless device capable of communicating via an air interface protocol with the population of RF addressable sensors 102. In embodiments of the present invention, wireless sensor reader 140 could be a wireless phone, a personal digital assistant (PDA), a computer having wireless communications capabilities, or other type of mobile, handheld, and/or computing device.

[0040] According to the present invention, signals 115 are exchanged between the wireless sensor reader 140 and the population of RF addressable sensors 102 according to one or more protocols. Signals 115 are wireless signals, such as radio frequency (RF) transmissions. In an embodiment of the present invention, reader 140 and the population of sensors 102 communicate via a single protocol for both RFID tag communications and sensor communications. In an alternate embodiment, reader 140 and the population of sensors 102 communicate via a first protocol for RFID tag communications and via a second protocol for sensor communications. Examples of protocols used for RFID tag communications are described in the following co-pending U.S. Patent Applications, each of which is incorporated by reference in its entirety: Application Serial No. 10/072,984, filed February 12, 2002, entitled "Radio Frequency Identification Architecture;" Application Serial No. 10/687,690, filed October 20, 2003, entitled "Method for the Efficient Reading of a Population of

Radio Frequency Identification Tags with Unique Identification Numbers Over a Noisy Air Channel;" and Application Serial No. 10/693,687, filed October 27, 2003, entitled "Optimization of a Binary Tree Traversal with Secure Communications." The present invention is also applicable to any other types of communication protocols between tags and readers otherwise known or yet to be developed.

[0041] In an embodiment of the present invention, signals 165 are exchanged between the wireless sensor reader 140 and the wireless communication network 170 according to one or more protocols. Signals 165 are typically RF signals. As can be appreciated by a person skilled in the relevant art(s), the communications protocol used between reader 140 and wireless network 170 can be any wireless air interface protocol, such as used in IS-41 or GSM wireless communications networks, for example.

[0042] In an alternate embodiment, wireless sensor reader 140 can also communicate to the data communications network 175 via interface 185. Interface 185 is a wired interface. For example, when wireless sensor reader 140 is a computer having wireless capabilities, sensor reader 140 may access the Internet via interface 185 using TCP/IP. As can be appreciated by a person skilled in the relevant art(s), the communications protocol used between reader 140 and data communications network 175 can be any data communications protocol.

[0043] In an embodiment of the present invention, wireless network 170 is a publicly accessible network, such as a switched telephone network supporting wireless communications. In an alternate embodiment, wireless network 170 may be a private network. Wireless network 170 may be coupled to a publicly accessible data communications network 175. Publicly accessible data communications network 175 can be a public switched telephone network or a public data network such as the Internet. In addition, data communications network 175 can be connected to other public or private networks as would be appreciated by persons skilled in the relevant art(s).

[0044] Sensor network processor 190 receives sensor data over network 180, and processes the data. Furthermore, in an embodiment, processor 190 transmits the processed data back over network 180 to reader 140, for example. Sensor network processor 190 includes a geolocation processor 192 and a sensor data processor 194. Sensor network processor 190 may be a stand-alone system or may be distributed across multiple systems. Geolocation processor 192 includes logic to receive data from one or more RF addressable sensors 110 and to perform GPS and/or non-GPS geolocation of the RF addressable sensors 110 based on the received data and/or signals. In GPS based geolocation, location is determined using signals provided to wireless sensor readers 140 via geo-stationary satellites. A limitation of GPS based geolocation is that signals are not available if the device is shielded (e.g., underground, in a building, etc.). In non-GPS based geolocation, location is determined by triangulation based on transmission systems as reference points (e.g., mobile base stations) and time to signal calculations. In this manner, cell phone towers can geolocate wireless sensor readers 140 through calculations done by processor 190. Similarly, wireless sensors readers 140 may be used as a basis to identify the precise location of individual sensors 110 by triangulation and synchronization of internal clocks. Since either the location of cell phone towers and/or wireless sensor readers is usually known and can include GPS coordinates, precise geolocation of sensors can be achieved using either GPS, non-GPS or hybrid systems.

[0045] For more information concerning geolocation, see U.S. Patent 6,031,454, filed November 13, 1997, entitled "Worker-Specific Exposure Monitor and Method for Surveillance of Workers," which is incorporated herein by reference in its entirety.

[0046] Sensor data processor 194 includes logic to receive sensor data from one or more RF addressable sensors 110, perform processing on the received data, and communicate information based on the processing to wireless reader 140 or an end user device 182. Sensor network processor 190 is coupled to the wireless communications network 170 and/or the data communications network 175.

1.2 RF Addressable Sensor

[0047] FIG. 2 is a block diagram of a radio frequency (RF) addressable sensor 210, according to an embodiment of the present invention. RF addressable sensor includes RFID tag functionality integrated with sensor functionality.

[0048] Radio frequency addressable sensor 210 includes an integrated circuit 222, a plurality of RF pads 204a through 204n, and a plurality of antennas 206a through 206n. These components are mounted or formed on a substrate 202. RF addressable sensor 210 also includes a plurality of sensor elements 291a-291n, 292a-292n, and 294a-294n.

[0049] Sensor elements may be included in integrated circuit 222, on substrate 202, external to substrate 202, or in any combination of the above. As shown in FIG. 2, sensor elements 291a-n are included as a component in integrated circuit 222. Sensor elements 292a-n are included on the substrate 202. Any sensor element that is compatible with the fabrication of RF addressable sensor 210 can be used. In an embodiment of the invention, sensor elements 292a-n can be thin film sensor elements that are deposited, printed, or directly assembled onto substrate 202. Sensor elements 294a-n are external to the substrate 202. If the sensor element is located on the substrate (collectively sensor elements 292) or external to the substrate (collectively sensor elements 294), the sensor element will be coupled to one or more of the plurality of sensor pads 208a through 208n (collectively sensor pads 208).

[0050] The structure of sensor pads 208 depends on the type of sensor element coupled to the sensor pad 208. In an embodiment of the present invention, sensor pads 208 are metal. However, certain biological sensor elements consist of soft materials. When coupling to metal sensor pads 208, the potential exists for these sensor elements to be pierced. In an alternate embodiment of the present invention, one or more sensor pads are soft sensor pads. These soft sensor pads provide a transition from a metal connection layer for coupling to the integrated circuit components to a soft connection layer for coupling to

the sensor element. By using a soft transition method any type of external sensor element can be coupled to substrate 202. For example, doped inks or conductive polymers can be used to couple and bond substrate 202 to an integrated sensor as described below. The integrated sensor may be fabricated using other micro or nanofabrication techniques, thereby providing a means for an sophisticated integrated wireless sensor to be produced at a very low cost and for many different market applications.

[0051] Because of this flexible architecture, various types of sensor elements can be implemented in RF addressable sensor 210. An RF addressable sensor 210 may include only one type of sensor element or may include a combination of different types of sensor elements. Examples of sensor elements include: gas sensor elements that detect the presence of chemicals, such as those associated with drugs or precursor or trace chemicals of explosives such as Pentaerythritol Tetranitrate (PETN) and Hexahydro-1,3,5-triazine (RDX); temperature sensor elements that generate information indicating ambient temperature; accelerometers that generate information indicating movement or vibration; optical sensor elements that detect the presence (or absence) of light; pressure sensor elements that detect various types of mechanical pressures; tamper sensor elements that detect efforts to destroy or remove the sensor from affixed items; electromagnetic field sensor elements, radiation sensor elements; and biochemical sensor elements. However, this list is not exhaustive. RF addressable sensor 210 may include other types of sensor elements or combinations thereof, as would be apparent to persons skilled in the relevant art(s).

[0052] Sensor elements 291a to 291n are sensors that can be fabricated directly on the chip surface as part of integrated circuit 222. For example, these include sensors for temperature change, radiation, electrical changes, field effects and motion. Sensor elements 292a to 292n may be a number of different sensor types such as a chemical sensors, biological sensors, etc. In an embodiment, sensor element 292a may include of a plurality of special thin film elements such as

polymers. For example, in chemical sensor elements, chemicals present in the air are absorbed differently by each of the thin film elements, changing the resistance of each and creating a characteristic electronic signature. Because many types of detectors can be added, this technology can be designed to recognize a wide range of chemicals. It should be noted that hybrid systems are also possible. For example, embedded passives may be used to create some of the electronic functionality on the chip and combined with sensor functionality.

[0053] In an alternate embodiment, one or more of the antennas 206 may be used as sensor elements. For example, the antenna could operate as an on-off sensor. As the antenna absorbs material to be sensed, the antenna becomes detuned and the tag stops operating. Thus, when the tag shuts off, the material has been sensed. In this embodiment, the antennas acting as sensor elements are coupled to both an RF pad 204 and a sensor pad 208. In an alternate embodiment, RF pads 204 are coupled to both the RF power and communications interface 240 and the sensor interface 250.

[0054] In an embodiment of the present invention, RF addressable sensor 210 is or includes a micro-electro-mechanical system (MEMS). In an embodiment, sensor elements can include mechanical and electromechanical devices "micromachined" on a common or separate substrate with the remaining components of the RF addressable sensor 210. In this embodiment, the remaining electronic components could be fabricated using conventional integrated circuit technology. For example, in a MEMS RF addressable sensor, one or more sensor elements can contain microcantilever devices.

[0055] In an alternate embodiment, the sensor elements 294a-294n are external to substrate 202 and can be fabricated using MEMS technology and attached to substrate 202, while the components included on substrate 202 can be fabricated using conventional technology. This allows any type of sensor to be coupled with an RFID tag.

[0056] FIG. 2A is a block diagram of an RF addressable sensor 210 having an external sensor element according to embodiments of the present invention. External sensor element 294 may be coupled to an independent power supply 293. Substrate 202 may also or alternatively be coupled to independent power supply 293. In an embodiment, power supply 293 is a disposable battery or a photovoltaic cell. Thus, sensor element 294 does not require periodic "power" signals from the wireless reader. In an embodiment, sensor element 294 includes a memory.

[0057] An advantage of the RF addressable sensor configuration of FIG. 2A is that the wireless components and geolocation features are provided by the RFID tag and cell phone combination thereby reducing the cost and making it suitable for sensor networks. An example of an application is a homeland security network with sensors that are dispersed by airplane over certain areas together with low cost readers. If a hazard is detected, sufficient power is present at the sensor level to send a "wake up" signal to a nearby reader. The reader then geolocates itself and the sensor and relays the information to a remote processor 190. Cross validation of sensor events may then be achieved by activating and reading other sensors in the same geographical area. A further advantage is that the present invention can be used in combination with sensors that require more power than is available on an RFID tag. In addition, sensor elements that require very different manufacturing processes than the RFID tag can also be used in the present invention.

[0058] In an embodiment of the present invention, as shown in FIG. 2, RF addressable sensor 210 optionally includes a plurality of reference elements 295a-295n, 296a-296n, and 297a-297n. Similar to the sensor elements, reference elements may be included in integrated circuit 222, on substrate 202, external to substrate 202, or in any combination of the above. As shown in FIG. 2, reference elements 295a-295n are included in integrated circuit 222; reference elements 296a-296n are included on substrate 202; and reference elements 297a-297n are external to substrate 202. A sensor element need not have a reference

element. If the reference element is located on the substrate (collectively reference elements 296) or external to the substrate (collectively reference elements 297), the reference element will be coupled to one or more of the plurality of reference pads 209a through 209n (collectively reference pads 209).

[0059] Reference elements allow for the cross validation of sensor data and establish baselines. This is important for chemical measurements, for biological sensors, and for any sensor situation where there are two or more variables and at least one of the variables is dependent or proportional to the other.

[0060] In an embodiment of the present invention, a sensor element may have a plurality of associated reference elements. In an embodiment, a reference element provides a baseline and/or calibrated value to which a sensor element can be compared either internally or externally. In an embodiment, reference data can be transmitted by the RF addressable sensor to the wireless sensor reader or to the network sensor processor for calibration of the sensor elements.

[0061] As shown in the embodiment of FIG. 2, integrated circuit 222 includes a RF power and communications interface 230, a sensor interface 250, and an RFID control module 240. Sensor interface 250 includes a digitizer or an analog to digital converter (ADC) 252. ADC 252 receives analog signals from sensor elements and converts the analog signal into a corresponding digital signal. ADC 252 can be coupled directly to sensor elements implemented in integrated circuit 222 and is coupled to other sensor elements 292 and 294 via sensor pads 208. In an embodiment, a filter (not shown) may be used between the sensor element and ADC 252.

[0062] In an embodiment of the present invention, sensor interface 250 optionally includes one or more thermistors 254. Thermistor 254 is a device that has an electrical resistance that varies predictably with temperature. Thermistor 254 provides a correlation point for data obtained from a sensor element. Because temperature is a generally known variable, including a thermistor in RF addressable sensor 210 allows the sensor 210 to use temperature as a basis for comparison or

allows a sensor element output value to be adjusted based on temperature. This adjustment can occur internally or externally at the wireless sensor reader 140, end user device 182, and/or network sensor processor 190.

[0063] In an embodiment of the present invention, thermistor 254 is made of a material such as a metal-oxide that has a resistance that changes in a linear fashion according to temperature. Hence, at a given temperature, the thermistor has a certain value that can be correlated precisely to a given temperature. The calibration of thermistor 254 can be done in batches after the chip is microfabricated. Calibration can be achieved by bringing the chip to a set temperature and programming into the chip the corresponding value. This process can be repeated at two different temperatures, thereby providing the reference in memory.

[0064] In an embodiment of the present invention, thermistor 254 is made of a non-linearly changing material. In this embodiment, additional calibration points are used. As would be appreciated by persons skilled in the relevant art(s), other implementations of thermistor 254 can be used in the present invention.

[0065] In an embodiment, sensor interface 250 may optionally include a memory 256. Memory 256 stores information used by RF addressable sensor 210 to process sensor data received from sensor elements. The information may be stored permanently or temporarily. In an embodiment of the present invention, memory 256 is a programmable memory. The stored information may be used internally by the RF addressable sensor 110 or may be communicated for use externally by the wireless sensor reader 140, an end user device 182, and/or the network sensor processor 190.

[0066] In an embodiment, memory 256 stores a sensor data table 258. The sensor data table 258 is configured to store data related to all or a subset of sensor elements supported by the RF addressable sensor 210. For example, the sensor data table may store a sensor element identification number, a preferred read time, spacing interval between reads, and/or sensor element specific data for all or a subset of sensor elements.

[0067] Using this approach a universal sensor platform is created based on RFID technology by allowing wireless devices such as phones to become “smart” sensor reader devices. In an embodiment, a wireless device such as a phone is modified to include RFID-sensor tag reader functionality, as described herein. In an embodiment, when a sensor 110 having data table 258 is activated by wireless sensor reader 140, the sensor 110 identifies itself (e.g., by providing its identification number) and provides the cell phone reader with the necessary information for analyzing the sensor output. In an embodiment, sensor data table 258 also includes sensor handling information that is communicated to reader 140. For example, if sensor 110 is to detect a specific allergen in food, a complete step-by-step testing protocol can be provided and can be displayed directly on the screen of the phone or reader device 140. In another embodiment, some or all of the necessary information to handle and analyze the sensor is retrieved from processor 190.

[0068] Software may also be downloaded directly and transparently into the cell phone or reader 140 to “train” the wireless device to recognize and analyze that given type of RFID-sensor. This information may be stored permanently or temporarily in wireless device 140. When the necessary processing and analysis information is downloaded from a remote location, only the ID of the RFID-sensor is necessary, providing a highly streamlined solution for universal sensor analyses for wireless devices such as cell phones. In another embodiment, hybrid systems can be provided whereby only a basic sensor analysis protocol can be downloaded into the cell phones and the sensor data processing is done remotely. This situation is particularly applicable where complex multivariate analyses of sensor data are required. Phones may also include in permanent memory a summary table with the necessary IDs to recognize any type of sensor. The above described method allows an ordinary wireless device to instantly become a “smart” device for any type of sensor

[0069] Integrated circuit 222 can accommodate multiple antennas 206a through 206n. This allows RF addressable sensor 210 to have a variety

of antenna configurations on substrate 202. For example, wireless sensor reader 140 (shown in FIG. 1) may operate at a different frequency or have different directivity than conventional RFID readers. Therefore, RF addressable sensor 210 may have one or more antennas configured to communicate with a conventional RFID reader and one or more antennas configured to communicate with wireless sensor reader 140.

[0070] The RFID control module 240 controls RF communications between the RF addressable sensor 210 and wireless sensor reader 140. RFID control module includes a controller 242 and a memory 246. Controller 242 includes RFID tag logic 244 to respond to RFID tag interrogation and read communications by the wireless sensor reader 140 or another tag reader and logic to control the operating state of the RFID tag components of the RF addressable sensor. For more information concerning interrogation of tags, and more generally, communication between an RFID reader and a population of tags in accordance with an embodiment of the present invention, see U.S. Patent No. 6,002,344, entitled, "System and Method for Electronic Inventory" which is incorporated herein by reference in its entirety, and the following co-pending U.S. Patent Applications, each of which is incorporated by reference in its entirety: Application Ser. No. 09/323,206, filed June 1, 1999, entitled "System and Method for Electronic Inventory"; Application Ser. No. 10/072,855, filed February 12, 2002, entitled "Method, System and Apparatus for Binary Traversal of a Tag Population" (Publication No. 0149481-A1); and Application Ser. No. 10/073,000, filed February 12, 2002, entitled "Method, System and Apparatus for Communicating with a RFID Tag Population."

[0071] Controller 242 may optionally include sensor processing logic 245 to process sensor data obtained by sensor elements. Memory 246 stores information used by the RF addressable sensor when operating as a RFID tag. Memory 246 may be separate or integrated with memory 256 of the sensor interface. The information may be stored permanently or temporarily. Memory 246 stores the tag identification

number for the RF addressable sensor 210. In an embodiment of the present invention, the tag identification number indicates the type of sensor elements included in the RF addressable sensor 210.

[0072] RF Power and Communications Interface 230 includes a communications module 232 and a power generation module 236. Communications module 232 is coupled to antennas 206 to provide bi-direction communication with a wireless RF addressable sensor reader. In an alternate embodiment, communication module 232 provides bi-directional communication with a conventional RFID reader in addition to the wireless RF addressable sensor reader. In an embodiment, power generation module 236 provides integrated circuit 222 with an operational voltage based on the RF energy transmitted by wireless sensor reader 140 and received by the corresponding RF addressable sensor 110. In another embodiment, power generation module 236 may also include a battery or other power source. Alternatively, power generation module 236 may only include a battery or other power source. When present, the power source provides the operational voltage for integrated circuit 222. In addition, the power generation module 236 may provide operational voltage for sensor elements 292a-n and/or 294a-n. For example information concerning power generation in an RFID tag, see U.S. Patent Application Ser No. 10/383,537, filed March 10, 2003, entitled, "Efficient Charge Pump Apparatus" which is incorporated herein by reference in its entirety.

[0073] In an embodiment, when a power source is present, the RF addressable tag may include logic to activate the reader when certain conditions are sensed, on the occurrence of a pre-defined event, and/or at pre-defined intervals. As would be appreciated by persons skilled in the art, many RFID tag communications protocols can be used to activate the reader according to the present invention.

1.3 Wireless RF Addressable Sensor Reader

[0074] Example embodiments for wireless sensor reader 140 are described in this section. FIG. 3 is a block diagram of a wireless sensor reader 340 according to example embodiments of the present invention. Wireless sensor reader 340 includes a network communications module 342, a controller 344, a user interface 346, and an RF addressable sensor logic module 350. Wireless sensor reader 340 also includes one or more antennas. Antenna 348 is configured for communication with wireless network 170. Antenna 348 is included when wireless reader 340 is integrated with a wireless communications device. In an embodiment of the present invention, antenna 348 is also configured for communication with the population of RF addressable sensors. Antennas 349a-n are included when antenna 348 does not support communication with the population of RF addressable sensors. In this embodiment, antennas 349 are configured to communicate with the RF addressable sensors 110. In an alternate embodiment, network antenna 348 can be removed (e.g., unscrewed) from reader 340 and replaced with an RFID antenna 349 for communication with the population of sensors 102.

[0075] Controller 344 includes logic to coordinate and control the operation of the components of wireless sensor reader 340.

[0076] User interface 346 provides a mechanism for the user of the wireless sensor reader 340 to access and interact with sensor information and/or initiate a read of one or more sensors 110. User interface 346 may include a display and/or keypad for entering data (e.g., the numerical keypad of a wireless phone). In an alternate embodiment, user interface 346 includes a standalone button for initiating sensor reads and/or processing. In addition, the wireless sensor reader 340 includes a display for displaying data obtained from RF addressable sensors 110. In an embodiment, the wireless sensor reader 340 also includes an alarm for indicating when certain thresholds are reached or certain conditions are detected by an RF addressable sensor.

[0077] A user may alternatively initiate sensor processing by entering a pre-defined sequence of characters via a key pad (e.g., by entering *2222). Alternately, a user could initiate sensor processing by highlighting or activating an option provided through a display or by a predefined voice command.

[0078] Network communications module 342 includes one or more transmitters and receivers for communicating with the data communications network 175 and/or wireless communications network 170. In an embodiment of the present invention, wireless sensor reader 340 communicates with wireless network 170 via network antenna 348. Accordingly, network communications module 342 includes a wireless interface coupled to the antenna 348. In an alternate embodiment of the present invention, wireless sensor reader 340 communicates with a publicly accessible data communications network 175 via a wired connection. In this embodiment, network communications module 342 includes a wired network interface. If both types of communications are supported, network communications module 342 will include both a wireless interface and a wired interface.

[0079] RF addressable sensor logic module 350 includes an RF addressable sensor communications module 352 and an RFID tag processor 356. Wireless sensor reader 340 communicates with the population of RF addressable sensors 102 via either the network antenna 348 or via one or more RFID antenna(s) 349a-349n. If wireless sensor reader 340 communicates with the population of RF addressable sensors via one or more RFID antenna(s) 349a-n, RF communications module 352 will include one or more transmitters and receivers coupled to antennas 349. As will be appreciated by a person skilled in the relevant art(s), RF communications module 352 may be implemented in hardware, software, firmware, or in combination thereof.

[0080] RFID tag processor 356 includes logic to interrogate and read RFID tag information from RF addressable sensors 110. As will be appreciated by a person skilled in the relevant art(s), RFID tag

processor 356 may be implemented in hardware, software, firmware, or in combination thereof.

[0081] RF addressable sensor communications module 352 includes sensor data processing logic 355 and geolocation processing logic 353. Sensor data processing logic 355 is configured to request a read of one or more addressable sensors 110 based on input from a user, after a certain interval of time, and/or upon the occurrence of a pre-defined event. Sensor data processing logic 355 is also configured to process received sensor data.

[0082] Geolocation processor 353 is optional, and when present, includes algorithms to perform GPS based geolocation and/or non-GPS based geolocation. In an embodiment, sensor reader 340 serves as a geolocation beacon for RFID-sensors in synchrony with other readers. In an embodiment, the antenna serves as a means for directional geolocation of RFID sensors.

[0083] FIGs. 4A-C depict block diagrams of example configurations for a wireless sensor reader 440. Each configuration depicts various ways in which RF addressable sensor logic module 350 and RFID antennas 349a-n may be incorporated into a device 430. Device 430 can be an existing wireless device such as a wireless phone or PDA. In an alternate embodiment, device 430 is a device designed specifically to support communicating with RF addressable sensors 110 and with a communications network such as a wireless phone network or the Internet.

[0084] In FIG. 4A, RF addressable sensor logic module 350 is integrated into device 430. In this embodiment, wireless sensor reader 440 communicates with both the wireless network 170 and the population of RF addressable sensor tags via antenna 448. In an embodiment of the present invention, module 350 is built into device 430. In an alternate embodiment, device 430 includes a programmable processor. The logic for module 350 can be downloaded and stored in the programmable processor. The logic can be downloaded via the air interface, an infrared port, a data connection through the accessory

port, or via any other interface or link capable of transferring data to device 430.

[0085] In FIG. 4B, RF addressable sensor logic module 350 is integrated into device 430, as discussed in reference to FIG. 4A. However, in this embodiment, one or more antennas 449a-n are already included, or added onto device 430 for communication with the population of RF addressable sensors 102. Note that for this configuration, antenna 448 is optional and is not included if wireless sensor reader 340 only communicates with a data communications network 175 via a wired connection.

[0086] In FIG. 4C, RF addressable sensor logic module 350 is external to device 430 and is attached to device 430 via interface 435. For example, interface 435 could be an accessory port, an infrared port, or any other interface or port capable of transferring data to and from device 430 such as a wireless phone data/software interface. For example, module 350 may be a snap-on and/or plug-in module to device 430. Various antenna configurations are supported with this embodiment. In an embodiment, existing antenna 448 supports communication with both the network 170 and the population of sensors 102. In an alternate embodiment, additional antennas 449 for communicating with the population of sensors 102 are attached to external module 350. In another alternate embodiment, additional antennas 449 for communicating with the population of sensors 102 are attached to device 430. As would be appreciated by a person skilled in the relevant art(s), other configurations for wireless sensor reader 440 are possible.

2. RF Addressable Sensor Network Methods

2.1 RF Addressable Sensor Read Communications

[0087] FIG. 5 is a flowchart of a method 500 for RF addressable sensor read communications from the perspective of a wireless sensor reader. Method 500 will be described with continued reference to

FIGs. 1 and 3. Note that some steps shown in the flowchart do not necessarily have to occur in the order shown.

[0088] Method 500 begins with step 510. In step 510, a read of one or more RF addressable sensors is initiated. In an embodiment of the present invention, sensor data processing logic 355 includes logic that periodically initiates sensor read communications. For example, sensor data processing logic 355 may automatically initiate a sensor read every 15 minutes. A sensor read may also be initiated manually via the user interface 346 of wireless sensor reader 140/340. For example, a user may initiate a read by activating a display icon or option. In an embodiment, a user may initiate a read by pressing a series of keys on the device keypad (e.g., *2222) or by pressing a specifically configured sensor read button. Alternatively, if the device supports voice activated commands, the user may initiate a sensor read by speaking the appropriate command.

[0089] In addition, a sensor read can be initiated remotely over data communications network 175 or the wireless network 170. FIG. 6 depicts a method 602 for remotely initiating a sensor read according to embodiments of the present invention. Method 602 begins with step 603. In step 603, the wireless sensor reader 140/340 receives a connection signal from an end user device 182. As would be appreciated by a person skilled in the relevant art(s), the type and format of the connection signal depends upon the implementation of the end user device 182 and the wireless sensor reader 140/340. For example, if the wireless sensor reader 140/340 is also a wireless telephone device, the connection signal may be a telephone call by the end user device to the wireless sensor reader. Alternatively, end user device may be a data terminal. In this example, the connection signal may be any type of data communications connection signals.

[0090] In step 605, the wireless reader 140/340 connects to the end user device over a communications network.

[0091] In step 607, the wireless reader 140/340 receives initiation signal(s) from the end user device. As would be appreciated by a person skilled in the relevant art(s), the type and format of the

initiation signal(s) depends upon the type and format of the connection signal. If a telephone connection is established, then the initiation signals may be a series of dual tone multifrequency (DTMF) signals or a voice command. Control then proceeds to step 520.

[0092] Returning to FIG. 5, in step 520, the wireless sensor reader 140/340 communicates RF signals to one or more addressable sensors 520. These RF signals serve a dual purpose. They initialize the RF addressable sensors for communications and provide operating power to the sensors.

[0093] Based on the details provided during read initiation, the wireless sensor reader 140/340 may perform a sensor read of the entire population of RF addressable sensors 102 or may perform a read of a specific set of RF addressable sensors. In step 530, the reader determines whether to read the entire RF addressable sensor population 102 or one or more specific RF addressable sensors 110. If the entire population is to be read, operation proceeds to step 550. If one or more specific sensors 110 are to be read, operation proceeds to step 540.

[0094] For example, a user may obtain (e.g., purchase) a batch of RF addressable sensors. The user may store the tag identification numbers associated with each RF addressable sensor in the wireless sensor reader prior to initiating a read of the sensors. The reader can then isolate only those specific RF addressable sensors stored in the wireless sensor reader.

[0095] In step 540, RFID tag processor 356 isolates (e.g., singulates) the specific RF addressable sensor 110 to be read. Processor 356 may isolate a sensor 110 through an interrogation protocol, or other mechanism. For details on methods for isolating a specific tag, see pending U.S. Application entitled, "Radio Frequency Identification Architecture," referenced above. As would be appreciated by persons skilled in the relevant art(s), other protocols and methods for reading and isolating tags can be used with the present invention.

[0096] In step 542, the wireless sensor reader 140/340 instructs the specific RF addressable sensor 110 to obtain sensor data. This can be done via a predefined command. In an alternate embodiment, RF

addressable sensor 110 automatically signals sensor data to wireless sensor reader 140/340 upon being isolated. In this embodiment, step 542 is optional.

[0097] In step 544, the wireless sensor reader 140/340 receives the sensor data from the RF addressable sensor 110. Sensor data can include sensor element output data, sensor table data, reference data, and/or other data.

[0098] In step 546, the wireless sensor reader 140/340 determines whether any additional specific RF addressable sensors are to be read. If no additional sensors are to be read, operation proceeds to step 560. If additional sensors remain to be read, operation proceeds to step 540.

[0099] In step 550, the RFID tag processor 356 isolates an RF addressable sensor 110 from the population 102 using a conventional general read protocol such as binary tree traversal.

[0100] In step 552, the wireless sensor reader 140/340 instructs the identified RF addressable sensor 110 to obtain sensor data. This can be done via a predefined command. In an alternate embodiment, RF addressable sensor 110 automatically signals sensor data to wireless sensor reader 140/340. In this embodiment, step 552 is optional.

[0101] In step 554, the wireless sensor reader 140/340 receives the sensor data from the RF addressable sensor 110.

[0102] In step 556, the wireless sensor reader 140/340 determines whether any additional RF addressable sensors remain to be read. If no additional sensors remain to be read, operation proceeds to step 560. If additional sensors remain to be read, operation proceeds to step 550.

[0103] In step 560, the wireless sensor reader 140/340 determines whether any additional processing must be done on the received sensor data. If additional processing must be performed, operation proceeds to step 562. If no additional processing must be performed, operation proceeds to step 570.

[0104] In step 562, the wireless sensor reader 140/340 determines whether the additional processing is to be performed locally or remotely. If processing can be performed locally, operation proceeds

to step 568. If processing is to be performed remotely, operation proceeds to step 564. For example, some types of processing may be too resource intensive to perform efficiently on the wireless sensor reader 140/340 or may require data not available to the wireless sensor reader 140/340. In this situation, remote sensor processing is selected for the sensor data.

[0105] In step 564, the wireless sensor reader 140/340 communicates the received sensor data to sensor network processor 190 over communications network 180. In an embodiment, the wireless sensor reader may also communicate additional data to the sensor network processor 190 such as data needed to perform geolocation. Upon receipt, sensor network processor 190 may perform additional processing on the data and/or perform geolocation to determine the location of the RF addressable sensor 110 that generated the sensor data.

[0106] In step 566, wireless sensor reader 140/340 receives the processed sensor data from sensor network processor 190.

[0107] In step 568, sensor data processing logic 355 processes the received sensor data.

[0108] In step 570, the received sensor data or processed sensor data is displayed. In an embodiment of the present invention, the data is displayed via a user interface on wireless sensor device 140/340. In an alternate embodiment, the data may also be communicated to one or more end user devices over communications network for display. Step 570 is optional.

[0109] FIG. 7A is a flowchart of a method 700A for basic RF addressable sensor read communications from the perspective of single RF addressable sensor 110 according to an embodiment of the present invention. Method 700A will be described with continued reference to FIGs 1 and 2. Note that some steps shown in the flowchart do not necessarily have to occur in the order shown.

[0110] Method 700A begins with step 710. In step 710, RF addressable sensor 110 receives RF signals from wireless sensor reader 340. In an embodiment, step 710 includes the step where the received

RF signal is used to power sensor 110. Furthermore, step 710 may include the step where sensor 110 identifies itself to reader 340.

[0111] In step 720, sensor 110 receives a command from reader 340 to obtain sensor data. Step 720 is optional. In an embodiment of the present invention, RF addressable sensor 110 obtains sensor data automatically each time a communication session with a reader 340 is initiated.

[0112] In step 730, analog sensor data is obtained by one or more sensor elements 291, 292 and/or 294 and communicated to ADC 252.

[0113] In step 740, ADC converts the analog sensor data into digital sensor data.

[0114] In step 780, the RF addressable sensor 110 communicates the digital sensor data to wireless sensor reader 140/340. The details of this communication are dependent upon the protocol used for communication between the wireless sensor reader 140/340 and the RF addressable sensor 110. In an embodiment of the present invention, the protocol used is a binary tree traversal protocol. In this embodiment, the tag identification number signaled by the RF addressable sensor 110 may include both the tag identification number stored in memory 246 and the sensor data obtained by the sensor elements. Alternatively, reader 140/340 may place the RFID tag logic 244 in a command state. In the command state, the RFID tag logic responds to commands received from the reader. When the RFID tag logic 244 receives an obtain sensor data command signal, the RFID tag logic will signal the sensor data to the reader 140/340. In an embodiment, the sensor data communicated to reader 140/340 may include temperature data, sensor data, reference data and/or data stored in sensor data table 258.

[0115] FIG. 7B is a flowchart illustrating a method 700B of RF addressable sensor read communications from the perspective of an RF addressable sensor having local processing capabilities, according to an embodiment of the present invention. Method 700B will be described with continued reference to FIGs 1 and 2. Note that some

steps shown in the flowchart do not necessarily have to occur in the order shown.

[0116] Steps 710 through 740 are generally the same as steps 710 through 740 discussed above in reference to FIG. 7A.

[0117] In step 750, the converted digital sensor data is communicated to sensor processing logic 245.

[0118] In step 760, the sensor processing logic 245 processes the converted sensor data.

[0119] Step 780 is generally the same as step 780 discussed above in reference to FIG. 7A.

2.2 Example Applications

Homeland Security Sensor Network

[0120] The present invention is ideally suited to use for homeland security applications such as the detection of chemical, radiological, or biological agents over large areas, according to an example embodiment of the present invention. An example of this use is presented in the block diagram of FIG. 8 and the associated flowchart of FIG. 9. FIG. 8 depicts a sensor network 800 for monitoring geographical area 820. Sensor network 800 includes a plurality of RF addressable sensors 810a, 810b, and 810c, etc. (collectively sensor elements 810), one or more wireless sensor readers 840, and access points for communications network 880.

[0121] One or more of the wireless sensor readers 840 may be a permanent part of the sensor network 800. For example, multiple wireless sensor readers 840 may be affixed to different locations to provide maximum coverage of geographic area 820. In addition, one or more wireless sensor readers 840 may be temporarily part of the sensor network 800. For example, this would be the case when an individual carries a wireless sensor reader 840 capable of reading sensors 810 into geographic area 820. Each wireless sensor reader 840 has a read coverage range 845. Any RF addressable sensor 810 within

the read coverage range 845 can be read by the corresponding reader 840.

[0122] Any combination of one or more types of sensors can be used in sensor network 800. For example, RF addressable sensors 810a may include sensor elements for detecting chemical agents, sensors 810b include sensor elements for detecting radiological agents, and sensors 810c include sensor elements for detecting biological agents. As would be appreciated by a person skilled in the relevant art(s), other types of sensor elements can be included in this application.

[0123] The method 900 depicted in the flowchart of FIG. 9 begins with step 910. In step 910, a plurality of RF addressable sensors 810 are distributed to cover a defined monitoring area. The sensors 810 can be distributed manually or by another means such as scattering by aircraft to cover an even larger geographical area 820.

[0124] In step 920, one or more wireless sensor readers 840 initiates a read of sensor elements within its read coverage range 845. For example, a wireless reader 840 may initiate a read of its coverage range every 15 minutes.

[0125] In step 930, the wireless sensor reader 840 receives sensor data from the sensor elements within its read coverage range 845.

[0126] In step 940, the wireless sensor reader 840 determines whether the sensor data indicates the presence of any dangerous agents. If the data indicates the presence of a dangerous agent, operation proceeds to step 950. If the data indicates that no dangerous agents are present, operation can end, or can proceed to step 920.

[0127] In step 950, the wireless sensor reader 840 performs geolocation processing to determine the exact location of the RF addressable sensor associated with data indicating the presence of a dangerous agent. The geolocation processing could use GPS-based or non-GPS based techniques.

[0128] In an alternate embodiment, after performing step 930, the wireless sensor reader 840 communicates the received sensor data to a centralized sensor network processor 890. The sensor network processor 890 then performs steps 940 and 950. In addition, the sensor

network processor 890 receives sensor data from all wireless sensor readers 840 in geographic area 820. The sensor network processor 890 then compiles a complete picture of the status of geographic area 820 and can quickly identify and respond to any variations in sensor data from an area within geographic area 820. Cross validation of sensor events is important for network applications, particularly industrial or homeland security applications. For example, individual sensor events will not necessarily yield accurate information and may be, in fact, false positives. However, by matching similar sensor data in a given geographic location at a centralized point, cross validation becomes possible. As a result, the overall data yields greater precision such as the geographical center of the threat, peripheral areas, and areas where the threat is no longer a danger to the public.

Remote Monitoring of Shipping Containers or Cargo

[0129] The present invention can also be used for the remote monitoring of shipping containers or any shipping box, according to an example embodiment of the present invention. An example of this use is presented in the block diagram of FIG. 10. Remote shipping container monitoring network 1000 includes one or more shipping packages 1012, one or more shipping containers 1022, at least one transport vessel 1024, a communications network 1080, and a network monitoring processor 1090.

[0130] One or more RF addressable sensors 1010 may be affixed to each shipping package 1012 or concealed directly inside the box or crate. The RF addressable sensors 1010 include chemical sensor elements, radiological sensor elements, biological sensor elements or any combination of the above. In an alternate embodiment, a plurality of RF addressable sensors 1010 are affixed to the interior of each shipping container 1022.

[0131] Each shipping container 1022 includes at least one wireless sensor reader 1040 for obtaining sensor data from the RF addressable sensors 110. The transport vessel 1024 includes at least one device

1042 capable of receiving communications from a wireless sensor reader 1040. The transport vessel 1024 may also include at least one wireless sensor reader 1040. The device 1042 capable of receiving reader communications is coupled to the communications network. The network monitoring processor 1090 includes logic for receiving sensor data and associated information such as container identification, location, and transport identification. The network monitoring processor 1090 also includes inventory and risk management logic.

[0132] In an embodiment of the present invention, the shipping packages 1012 are loaded into one or more shipping containers 1022. The shipping containers are in turn loaded onto a transport vessel 1024. While FIG. 10 depicts the transport vessel as a ship, other types of transport vessels are possible including train, truck, aircraft, or other vehicular transports.

[0133] The wireless sensor readers 1040 initiate a read of the RF addressable sensors. For example, a wireless sensor reader 1040 in a shipping container 1022 will initiate a read of the RF addressable sensors stored in the shipping container. In an embodiment, reader 1040 processes received sensor data internally. Additionally or alternatively, wireless sensor reader 1040 will then establish a connection with device 1042. After establishing the connection, wireless sensor reader 1040 communicates the sensor data to the device. Device 1042 then communicates the data and other associated information (e.g., geolocation) to the network monitoring processor 1090 via the communications network.

[0134] Upon receipt of the sensor data and associated information, the network monitoring processor 1090 performs risk assessment processing. This processing identifies the presence of a hazardous chemical, radiological, or biological condition. If a hazardous condition is present, the network monitoring processor 1090 takes appropriate steps to address the condition. The network monitoring processor 1090 may also include a memory for storing received sensor data to create a historical profile for a container and/or transport vessel.

[0135] Because RF addressable sensors may be concealed inside shipping boxes, when monitoring for the presence of explosives, because of the low diffusion coefficients for high explosives, proximity factors could make present invention as sensitive or even more sensitive than the most expensive screening technology used in airports.

[0136] Specifically the diffusion coefficients for gases in air are relatively low, typically between 6×10^{-6} and $1.5 \times 10^{-5} \text{ m}^2/\text{sec}$. If we assume a point source of gas at the origin at $r=0$, a solution of the following three dimensional diffusion equation yields the concentration, C , as a function of time, t , and of distance, r , from the origin:

$$\partial C / \partial t = D \nabla^2 C$$

where D is the diffusion coefficient.

A solution of this equation is

$$C(r,t) = B (\pi Dt)^{-3/2} \exp (-r^2 / 4Dt)$$

[0137] The constant B depends on the quantity of gas released at time $t = 0$, and the integral of $C(r,t)$ over all space is independent of time and is just B , the number of molecules released. This solution is simply a Gaussian whose half-width increases in time as $(2Dt)^{1/2}$. Thus, if a one tenth of a mole of gas is released, corresponding to about 2.2 liters at atmospheric pressure or 6×10^{22} molecules, then for a diffusion coefficient $D = 10^{-5} \text{ m}^2/\text{sec}$ the concentration in one hour at 1m from the source will be 2.5% but at 2m it will be only 0.023 parts per billion. Thus, there is an advantage in having distributed low cost sensors, even if less sensitive, than relying on centralized units. This analysis applies to still air which would be the case for storage areas, shipping containers, sealed shipping boxes, etc. In open air, turbulence and wind, which may be directional, will overwhelm diffusion. Nevertheless, since the concentration will still rapidly fall off (at least as $1/r^2$ if not exponentially) with distance from the source, the argument that proximity more than makes up for lower sensitivity still

holds. Similarly, radiation tags may be concealed directly within the walls of boxes or crates, bringing the sensor very close to the potential source and thereby increasing sensitivity.

Smart Cards and Remote Diagnostics Monitoring

[0138] The present invention can also be used for remote diagnostics monitoring, according to an example embodiment of the present invention. An example of this use is presented in the block diagram of FIG. 11. As shown in FIG. 11, remote individual-specific monitoring network 1100 includes one or more smart cards or badges 1103 having at least one RF addressable sensor 1110, a wireless sensor reader 1140, a communications network 1180, and an end user device 1182.

[0139] The RF addressable sensor 1110 may have sensor elements for monitoring temperature, chemical composition, biological composition, or a combination of the above for an individual.

[0140] The remote monitoring application can have residential, industrial, commercial, security or medical institution applications. In an embodiment of the present invention, smart card or badge 1103 is affixed to a person (or animal) such that the sensor elements of the RF addressable sensor are proximate to the surface of the skin. RF addressable sensor 1110 may include low power sensors to monitor certain conditions or characteristics such as the individual's vital functions. The smart card or badge 1103 is placed within the read range of the wireless sensor reader 1140.

[0141] A read of RF addressable sensor 1110 is then activated remotely. For example, in a residential application, a person (e.g., a parent) may connect to the wireless sensor device (e.g., by establishing a phone connection) via an end user device coupled to communications network 1180 to initiate a read. Alternatively, in a medical institution application, a health care provider may connect to the wireless sensor device via a data terminal or telecommunications device. In addition, the medical institution may have a centralized monitoring system 1190

which automatically initiates a read for patients being treated in the medical institution.

[0142] Upon initiation of a read, wireless sensor reader 1140 obtains sensor data from RF addressable sensor 1110 and communicates the information to the initiating end user device 1182 or centralized processor 1190. The sensor data is then displayed to the requesting party. Alternatively, centralized processor 1190 may create a historical record of all received sensor data associated with a particular patient or worker. Based on this historical data and any newly received sensor data, the centralized diagnostic processor 1190 can run a variety of algorithms to detect changes in the condition of the patient. The centralized diagnostic processor 1190 can then alert the appropriate personnel when certain changes are detected.

[0143] In commercial or industrial settings, the individual-specific monitoring network 1100 can be used to monitor worker exposure to chemicals or environmental conditions. In this embodiment, each worker or a subset of workers has a smart card or badge 1103 containing one or more RF addressable sensors 1110. Sensors 1110 communicate data to reader 1140. This embodiment can further include geolocation processing in the reader or network to determine the location of the smart card or badge 1103 and/or reader 1140.

Remote Monitoring of Refrigerator Contents

[0144] The present invention can also be used for the remote monitoring of the contents of an appliance such as a refrigerator, according to an example embodiment of the present invention. An example of this use is presented in the block diagram of FIG. 12. In this application, as shown in FIG. 12, appliance 1201 includes a wireless sensor reader 1240 which is coupled to a communications network 1280.

[0145] A user places one or more items into appliance 1201 that have an RF addressable sensor 1210. For example, a product may have an RF addressable sensor 1210 included in the product's packaging.

Alternatively, the user may affix an RF addressable sensor 1210 to an item or may immerse or insert an RF addressable sensor into an item (e.g., immersing a sensor into a container of milk).

[0146] The user can then remotely initiate a read of the RF addressable sensors 1210 located inside the appliance 1201 via end user device 1282. After the read is completed, the wireless sensor reader 1240 communicates the data to the end user device 1282. The read may include a simple inventory of the contents of the appliance. In an alternate embodiment, the read also include sensor data indicating the freshness of certain food articles.

[0147] For example, a person may remotely initiate a read of the contents of their refrigerator to prepare shopping list or identify any food articles which may have spoiled.

[0148] Through the RF addressable sensor technology described herein, any appliance can become "smart" and can become connected to any other wireless device such as a cell phone. Further, by combining the present invention with pay-as-you use wireless technology (e.g., prepaid wireless), many types of appliances can be connected to the wireless network because this technology allows for low cost operation and elimination of monthly bills.

Food Testing

[0149] The present invention is also ideally suited for food testing applications. FIG. 13A depicts a block diagram of an example real-time food testing application, according to an example embodiment of the present invention. FIG. 13B depicts a block diagram of a network-based food testing application.

[0150] In FIG. 13A, a user affixes, immerses, or inserts an RF addressable sensor 1310 onto or into a food item. The RF addressable sensor 1310 includes sensor elements to detect certain chemical compositions. For example, the user may be allergic to peanuts or other food allergen. The user may select an RF addressable sensor 1310 that is capable of detecting the trace presence of peanuts.

[0151] The user then initiates a read of the RF addressable sensor 1310 using a wireless sensor reader 1340. The RF addressable sensor 1310 communicates sensor data to the wireless sensor reader 1340 which process the data and displays the data or a message to the user. For example, the reader may display a message indicating that item x (e.g., peanuts) is not present.

[0152] FIG. 13B depicts a sensor network 1300 for monitoring food safety. This type of sensor network may be used at a grocery store or a food storage location (e.g., a warehouse). In this application, an RF addressable sensor 1310 is included in the packaging of each food item 1309. For example, each package of meat would include an RF addressable sensor 1310. Sensor network 1300 includes a centralized network processor 1390 for monitoring the safety of the food item. Centralized network processor 1390 has logic to periodically initiate a read of the food items to identify any items that should be removed. Centralized network processor 1390 is coupled to one or more wireless sensor readers 1340 via a communications network.

[0153] One or more of wireless sensor readers 1340 may be a permanent part of the network. For example, a supermarket may have one or more wireless sensor readers 1340 covering its meat storage sections and/or storage locations. In addition, one or more wireless sensor readers 1340 may be temporarily part of the network. This would be the case when an individual carries a wireless sensor reader 1340 capable of reading the sensors into the supermarket. This provides an end user with the ability to determine the quality of a food item prior to purchase.

[0154] In addition to being able to check the chemical quality of the food items, sensors may be provided that can detect the presence of bacteria such as E coli or Salmonella.

Drug Interactions

[0155] FIG. 14 depicts a block diagram of an example application of a sensor network for identifying potential interactions among prescribed

drugs, according to an example embodiment of the present invention. Sensor network 1400 includes one or more drug canisters 1404, a wireless sensor reader 1440, a communications network 1480, and a centralized processor or server 1490. Each drug canister 1404 includes a label 1405 having an RF addressable sensor 1410. The centralized processor 1490 contains a record for each patient indicating drugs currently registered for the patient. In addition, centralized processor 1490 includes a database listing known interaction among drugs.

[0156] Using this application, a user (e.g., a pharmacist) initiates a read of RF addressable sensor 1410 attached to canister 1404 for each drug being taken by the user. The attached RF addressable sensor 1410 communicates details related to the drug and prescription such as type, dosage, chemical composition, etc. to the wireless sensor reader 1440. The wireless sensor reader 1440 then communicates these details to the centralized processor 1490. Centralized processor 1490 then registers the drug in the user's record and performs processing to identify any potential interactions with other drugs registered to the user. If a interaction is identified, the centralized processor 1490 communicates the details of the interaction to wireless sensor reader 1440 for display to the user (e.g., pharmacist).

[0157] In an alternate embodiment, wireless sensor reader 1440 may have some of the same functionality as centralized processor 1490 to identify potential drug interactions.

Remote Sensing

[0158] FIG. 15 depicts a block diagram of an example application of a sensor network 1500 for remote sensing of hazardous conditions, according to an example embodiment of the present invention. In many settings, monitoring for the presence of hazardous conditions is present. However, because of the lethality of hazardous conditions that can occur, human intervention to perform monitoring is not possible. Sensor network 1500 provides the capability for remote access to

sensors in order to detect or provide continual monitoring of hazardous conditions.

[0159] In this application, RF addressable sensors 1510 are affixed to packages or containers 1509 having contents with potential dangerous attributes (e.g., toxic chemicals). In addition, RF addressable sensors 1510 can be placed throughout the geographic area where packages or containers 1509 having contents with potential dangerous attributes are stored. A wireless sensor reader 1540 can then be introduced into the area. Wireless sensor reader 1540 can be a permanent component of the network (e.g., located in the storage area) or can be temporary (e.g., brought in on a remote controlled device). A user or remote system can then initiate a read of RF addressable sensors 1510 remotely via a communications network 1580. Wireless sensor reader 1540 then obtains the sensor data and communicates the data to the user or remote system. In this way, a person does not have to expose himself or herself to potentially hazardous conditions.

[0160] Sensor network 1500 can also be used for remote sensing of non-hazardous conditions. In an embodiment, RF addressable sensor 1510 includes a thermistor. RF addressable sensor 1510 can be remotely interrogated by a low cost wireless reader 1540. For example, RF addressable sensor 1510 can be attached to pipes in a home. A user in a different location can initiate a read of sensor 1510 and obtain temperature data using end-user device 1582. Because the user is accessing the data remotely, the user can check the status of his or her pipes from anywhere in the world. Alternatively, reader 1540 can be programmed to notify the end user device 1582 if a certain pre-set temperature is reached. By combining the present invention with pay-as-you use technology, the costs to provide this type of remote sensor network are reduced.

Shopping

[0161] FIG. 16 depicts an example application of a sensor network in retail grocery shopping, according to an example embodiment of the

present invention. Shopping network 1600 includes one or more items having RF addressable sensor tags 1610, a wireless sensor reader 1640, a communications network 1680, and a remote network server 1690.

[0162] An RF addressable sensor tag 1610 may be placed in the packaging of perishable food items and may also be placed in the packaging of other food items by the manufacturer. In an embodiment, the wireless sensor reader 1640 is located at the checkout station. In an alternate embodiment, a user may have a wireless sensor reader 1640. In another embodiment, reader 1640 may also be integrated into the shopping cart or another device used by a consumer.

[0163] When the consumer enters the checkout station, a read of the RF addressable sensors 1610 located in his or her cart is performed. The wireless sensor reader 1640 obtains sensor data and tag identification data and communicates this information to server 1690. Server 1690 has logic to determine the ingredients in the product and expiration dates associated with a particular item. The server 1690 communicates the processed results to the wireless sensor reader 1640 for display to the consumer. For example, the reader 1640 may display a warning if any item has expired or has spoiled.

[0164] If the consumer is using his or her own wireless sensor reader 1640, the user may store data related to individual-specific allergies or other medical conditions. In this embodiment, the wireless sensor reader 1640 may also display a warning if any item in the cart contains the allergens such as trace peanut products. In addition, the wireless sensor reader 1640 may inventory, calculate, and display the total charge for the items in the cart.

Calibration Sensing

[0165] The present invention can also be used in calibration applications. For example, this application is advantageous for persons experiencing allergies and/or certain medical conditions such as asthma. In this application, when a user experiences an allergic reaction or an asthma attack, the user initiates a read of one or more RF

addressable sensors in the area. In an embodiment, one or more of the RF addressable sensors may be a component of a smart card or badge. The wireless sensor reader can then record data related to the environment when the condition occurred. The user then repeats this each time the condition is encountered. In this way, the wireless sensor reader accumulates valuable data for the treatment of the condition as well as the future detection of individual-specific chemicals, etc., that may aggravate the condition or cause an attack to occur. For more information on calibration sensing in a conventional sensor network, see U.S. Patent Application Serial No. 10/382,606, entitled "Method and Apparatus for Wide Area Surveillance of a Terrorist or Personal Threat," which is incorporated herein by reference in its entirety.

Smart Buildings and Monitoring of Stress

[0166] The present invention can also be used for the remote monitoring of stresses in structures such as buildings, according to an example embodiment of the present invention. An example of this use is presented in the block diagram of FIG. 17.

[0167] Monitoring network 1700 includes one or more RF addressable sensors 1710 and a wireless sensor reader 1740. Sensors 1710 are utilized within major structures such as buildings to monitor in real time the stress within the structure. In an embodiment, sensors 1710 include a stress sensor element. Sensors 1710 may be placed directly within the structural beams or supports of the building. In an embodiment, RF addressable sensors 1710 may also include motion, radiation, and/or chemical sensor elements for comprehensive remote monitoring of buildings, bridges, homes, tunnels, etc.

[0168] One or more wireless readers 1740 may be a permanent dedicated part of network 1700. In addition, one or more wireless readers 1740 may be temporarily part of network 1700.

3. Conclusion

[0169] While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. It will be apparent to persons skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the invention. Thus, the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

WHAT IS CLAIMED IS:

1. An radio frequency (RF) addressable sensor comprising:
 - one or more sensor elements;
 - a sensor interface having an analog to digital converter coupled to the one or more sensor elements;
 - at least one antenna;
 - an RF power and communication interface coupled to the at least one antenna and the sensor interface;
 - a controller coupled to the RF power and communications interface and the sensor interface; and
 - a memory coupled to the controller and the sensor interface, wherein the memory is configured to store a tag identification number;
 - wherein the RF addressable sensor communicates with a wireless device that is coupled to a communications network; and
 - wherein the wireless device communicates with the RF addressable sensor to obtain sensor data for transmission over the communications network.
2. The RF addressable sensor of claim 1, wherein the sensor interface further comprises a memory.
3. The RF addressable sensor of claim 2, wherein the memory includes a sensor data table.
4. The RF addressable sensor of claim 3, wherein the sensor data table stores a sensor identification number.
5. The RF addressable sensor of claim 3, wherein the sensor data table includes sensor processing information.
6. The RF addressable sensor of claim 5, wherein the sensor processing information includes software for analyzing the sensor data.

7. The RF addressable sensor of claim 2, wherein the memory is a programmable memory.
8. The RF addressable sensor of claim 1 further comprising one or more reference elements.
9. The RF addressable sensor of claim 1, wherein the RF power and communications interface, memory and sensor interface are implemented in an integrated circuit.
10. The RF addressable sensor of claim 9, wherein at least one of the one or more sensor elements are implemented in the integrated circuit.
11. The RF addressable sensor of claim 9, wherein the integrated circuit and the at least one antenna are on a substrate.
12. The RF addressable sensor of claim 11, wherein at least one of the one or more sensor elements is implemented on the substrate.
13. The RF addressable sensor of claim 11, wherein at least one of the one or more sensor elements is external to the substrate.
14. The RF addressable sensor of claim 1, wherein the RF addressable sensor is a micro-electrical-mechanical system.
15. The RF addressable sensor of claim 14, wherein at least one of the one or more sensor elements includes a microcantilever device.
16. The RF addressable sensor of claim 13, wherein the at least one of the sensor elements external to the substrate is a micro-electrical-mechanical system.

17. The RF addressable sensor of claim 16, wherein the micro-electrical-mechanical system includes a microcantilever device.
18. The RF addressable sensor of claim 1, wherein at least one of the one or more sensor elements is an antenna.
19. The RF addressable sensor of claim 1 further comprising a thermistor.
20. The RF addressable sensor of claim 1, wherein the RF power and communication interface includes a power generation module that powers the RF addressable sensor.
21. The RF addressable sensor of claim 20, wherein the power generation module includes circuitry for harvesting RF energy.
22. The RF addressable sensor of claim 20, wherein the power generation module includes a power supply.
23. The RF addressable sensor of claim 13, wherein the at least one of the sensor elements external to the substrate is an accelerometer.
24. The RF addressable sensor of claim 13, wherein the at least one of the sensor elements external to the substrate is an acoustic wave sensor.
25. The RF addressable sensor of claim 13, wherein the at least one of the sensor elements external to the substrate is a piezoelectric sensor.
26. The RF addressable sensor of claim 13, wherein the at least one of the sensor elements external to the substrate is a resistive sensor.
27. The RF addressable sensor of claim 13, wherein the at least one of the sensor elements external to the substrate is a field-effect sensor.

28. The RF addressable sensor of claim 13, wherein the at least one of the sensor elements external to the substrate is a nanosensor.

29. The RF addressable sensor of claim 13, wherein at least one of the sensor elements external to the substrate is coupled to an external power supply.

30. A wireless sensor reader comprising:
at least one antenna configured for communication with one or more radio frequency (RF) addressable sensors;
a controller;
a network communications module coupled to the controller, the network communications module having an interface for coupling to a communications network;
a logic module coupled to the controller; and
a user interface,
wherein the logic module includes a sensor communications module for receiving sensor data from the one or more RF addressable sensors.

31. The wireless sensor reader of claim 30, wherein the communications network is a wireless communications network.

32. The wireless sensor reader of claim 31, wherein the at least one antenna is configured for communication with the communications network.

33. The wireless sensor reader of claim 31, further comprising a network antenna configured for communication with the communications network.

34. The wireless sensor reader of claim 30, wherein the communications network is a public data network.

35. The wireless sensor reader of claim 34, wherein the interface for coupling to the communications network comprises a data communications interface.

36. The wireless sensor reader of claim 30, wherein the user interface includes a preconfigured button for initiating a read of the RF addressable sensors.

37. The wireless sensor reader of claim 30, wherein the RF addressable sensor logic module further comprises:

a sensor processor having sensor data processing logic; and
a tag processor.

38. The wireless sensor reader of claim 37, wherein the logic module further comprises a geolocation processor.

39. The wireless sensor reader of claim 38, wherein the geolocation processor comprises logic to perform at least one of GPS-based geolocation and non GPS-based geolocation.

40. The wireless sensor reader of claim 30, further comprising means for receiving sensor processing information over the communications network.

41. The wireless sensor reader of claim 40, wherein the sensor processing information includes software for analyzing sensor data.

42. The wireless sensor reader of claim 30, wherein the controller, network communications module, and user interface are implemented in a wireless communications device.

43. The wireless sensor reader of claim 42, wherein the logic module is implemented in the wireless communications device.

44. The wireless sensor reader of claim 43, wherein the at least one antenna capable of communication with the one or more RF addressable sensors is coupled to the wireless communications device.

45. The wireless sensor reader of claim 43, wherein the wireless communications device includes a programmable processor.

46. The wireless sensor reader of claim 45, wherein the logic module is software stored in the programmable processor.

47. The wireless sensor reader of claim 46, wherein the software is downloaded into the programmable processor over a data interface.

48. The wireless sensor reader of claim 47, wherein the data interface is an infrared interface.

49. The wireless sensor reader of claim 47, wherein the data interface is an air interface.

50. The wireless sensor reader of claim 47, wherein the data interface is an accessory interface.

51. The wireless sensor reader of claim 42, wherein the wireless communications device includes a data interface.

52. The wireless sensor reader of claim 51, wherein the logic module is external to the wireless device and couples to the wireless device via the data interface.

53. The wireless sensor reader of claim 51, wherein the data interface is an infrared interface.

54. The wireless sensor reader of claim 51, wherein the data interface is an accessory interface.

55. The wireless sensor reader of claim 52, wherein the at least one antenna capable of communication with the one or more RF addressable sensors is coupled to the logic module.

56. The wireless sensor reader of claim 45, wherein the wireless communications device includes an interface.

57. The wireless sensor reader of claim 56, wherein a second logic module is external to the wireless device

58. A RF addressable sensor network, comprising:
one or more RF addressable sensors;
one or more wireless sensor readers coupled to a communications network; and
one or more end user devices coupled to the communications network;
wherein the one or more wireless sensor readers communicate with the one or more RF addressable sensor to obtain sensor data for transmission over the communications network.

59. The RF addressable sensor network of claim 58, wherein the communications network includes a wireless communications network and at least one of the one or more wireless sensor readers include a wireless communications device.

60. The RF addressable sensor network of claim 58, wherein the communications network is a data network.

61. The RF addressable sensor network of claim 60, wherein the communications network further comprises a wireless communications network coupled to the data network.

62. The RF addressable sensor network of claim 60, wherein the communications network is the Internet.

63. The RF addressable sensor network of claim 58, further comprising a sensor network processor coupled to the communications network.

64. The RF addressable sensor network of claim 63, wherein the sensor network processor comprises a geolocation processor and a sensor data processor.

65. The RF addressable sensor network of claim 64 wherein the geolocation processor includes logic to perform GPS based geolocation and non-GPS based geolocation.

66. A method in a wireless sensor reader for obtaining sensor data from one or more radio frequency (RF) addressable sensors and for communicating the sensor data over a communications network, comprising:

- (a) transmitting signals to the one or more RF addressable sensors wherein the signals initialize the one or more RF addressable sensors;

- (b) interrogating the one or more RF addressable sensors to isolate an individual RF addressable sensor;

- (c) receiving sensor data from the isolated RF addressable sensor;

- (d) determining whether processing of the received sensor data is required;

- (e) if it is determined in step (d) that no processing of the received sensor data is required, displaying the sensor data at the wireless sensor reader;

- (f) if it is determined in step (d) that processing of the received sensor data is required, determining whether processing is to be performed at the wireless sensor reader;

- (g) if it is determined in step (f) that processing of the received sensor data is to be performed at the wireless sensor reader, performing the steps of:

- processing the received sensor data, and

- displaying the processed sensor data at the wireless sensor reader; and

- (h) if it is determined in step (f) that processing of the received sensor data is not to be performed at the wireless sensor reader, performing the steps of:

- communicating the received sensor data over the communications network to a network sensor processor,

receiving processed sensor data, and
displaying the processed sensor data at the wireless sensor
reader.

67. The method of claim 66, further comprising:
prior to step (a), performing the steps of:
receiving a connection signal from an end user device coupled
to the communications network;
connecting to the end user device over the communications
network; and
receiving one or more initiation signals from the end user
device.

68. The method of claim 66, wherein initiating the read of the one or more
RF addressable sensors includes automatically initiating the read on
occurrence of an event.

69. The method of claim 68, wherein the event is the passage of a
predefined period of time.

70. The method of claim 66, wherein the wireless sensor device includes a
user interface having a keypad and a display.

71. The method of claim 70, wherein initiating the read of the one or more
RF addressable sensors comprises entering a sequence of key strokes via the
keypad.

72. The method of claim 70, wherein initiating the read of the one or more
RF addressable sensors comprises activating an item on the display.

73. The method of claim 66, wherein the wireless sensor device includes a
button preconfigured to initiate a read of the one or more sensor elements.

74. The method of claim 73, wherein initiating the read of the one or more RF addressable sensors comprises pressing the preconfigured button.

75. The method of claim 66, further comprising:
prior to step (a),
receiving one or more initiation signals from an RF addressable sensor.

76. The method of claim 66, further comprising:
prior to step (a),
receiving logic for obtaining sensor data from the one or more RF addressable sensors.

77. A method in a radio frequency (RF) addressable sensor for communicating sensor data to a wireless sensor reader for transmission over a communications network, wherein the RF addressable sensor includes one or more sensor elements, comprising:

- (a) receiving signals from the wireless sensor reader;
- (b) obtaining analog sensor data from at least one sensor element;
- (c) converting the analog sensor data to digital sensor data; and
- (d) communicating the digital sensor data to the wireless sensor reader for transmission over the communications network.

78. The method of claim 77, further comprising prior to step (b) receiving a read sensor signal from the wireless sensor reader.

79. The method of claim 77, further comprising prior to step (d) processing the digital sensor data.

80. The method of claim 77, further comprising the step of communicating a stored tag identification number to the wireless sensor reader.

81. The method of claim 77, further comprising the step of communicating reference data to the wireless sensor reader.

82. The method of claim 77, further comprising the step of communicating sensor processing information to the wireless sensor reader.

83. The method of claim 80, wherein communicating the digital sensor data to the wireless sensor reader includes communicating the digital sensor data as a component of the tag identification number.

84. A sensor network for monitoring for the presence of hazardous agents within a geographic area, comprising:

- one or more RF addressable sensors wherein each RF addressable sensor includes at least one sensor element for detecting the presence of a hazardous agent;

- one or more wireless sensor readers coupled to a communications network, wherein the wireless sensor readers obtain sensor data from the one or more RF addressable sensors; and

- a centralized sensor network processor coupled to a communications network, wherein the centralized sensor network processor receives sensor data from the one or more wireless sensor readers.

85. The sensor network of claim 84, wherein at least one of the one or more RF addressable sensors is capable of detecting the presence of a chemical agent.

86. The sensor network of claim 85, wherein at least one of the one or more RF addressable sensors is capable of detecting the presence of a radiological agent.

87. The sensor network of claim 86, wherein at least one of the one or more RF addressable sensors is capable of detecting the presence of a biological agent.

88. A method for monitoring a geographic area for the presence of hazardous agents, the method comprising:

(a) distributing a plurality of RF addressable sensors over a geographic area;

(b) deploying one or more wireless sensor readers within the geographic area to read the plurality of RF addressable sensors;

(c) at each wireless sensor reader,
initiating a read of the one or more RF addressable sensors,
receiving sensor data from the one or more RF addressable sensors, and

communicating the received sensor data to a centralized network sensor processor;

(d) determining whether the sensor data indicates the presence of a hazardous agent; and

(e) if it is determined that the sensor data indicates the present of a hazardous agent, performing geolocation to identify the location of the RF addressable sensor that communicated the sensor data.

89. A sensor network for the remote monitoring of shipping containers, comprising:

one or more packages, wherein each package includes one or more RF addressable sensors;

one or more shipping containers, wherein the one or more packages are loaded onto at least one of the one or more shipping containers for transport;

at least one transport vessel having a device for receiving sensor data from a wireless sensor reader; and

a centralized network monitoring processor for performing risk management on the received sensor data,

wherein each shipping container includes one or more wireless sensor readers, wherein the wireless sensor readers obtain sensor data from the one or more RF addressable sensors, and

wherein each RF addressable sensor includes at least one sensor element for detecting the presence of a hazardous agent.

90. The sensor network of claim 89, wherein the centralized network monitoring processor includes logic for performing geolocation.

91. The sensor network of claim 90, wherein each shipping container includes one or more RF addressable sensors.

92. The sensor network of claim 89, further comprising one or more shipping boxes.

93. A sensor network for the remote monitoring of one or more individuals, comprising:

- one or more smart cards transported by at least one individual, wherein each smart card includes one or more RF addressable sensors;

- at least one wireless sensor reader coupled to a communications network; and

- one or more end user devices for remotely initiating a read of the RF addressable sensors over the communications network,

- wherein the at least one wireless sensor reader communicates with the one or more RF addressable sensors to obtain sensor data to communicate over the communications network, and

- wherein an individual has at least one smart card.

94. The sensor network of claim 93, wherein the smart card is positioned such that the one or more RF addressable sensors are proximate to the skin of the at least one individual.

95. The sensor network of claim 93, further comprising a centralized diagnostic system for initiating a read of the RF addressable sensors and processing the received sensor data to identify changes requiring attention of a health care professional.

96. A sensor network for monitoring of the contents of an appliance, comprising:

- one or more items placed in the interior of the appliance;

- one or RF addressable sensors coupled to each item;

one or more wireless sensor readers located within a read range of the RF addressable sensors and coupled to a communications network; and

an end-user device coupled to the communications network for initiating a read of the RF addressable sensors.

97. A sensor network for monitoring structures, comprising:

one or more RF addressable sensors wherein the RF addressable sensors are proximate to the support members of the structure;

one or more wireless sensor readers coupled to a communications network, wherein the wireless sensor readers obtain sensor data from the one or more RF addressable sensors; and

a centralized sensor network processor coupled to the communications network, wherein the centralized sensor network processor receives sensor data from the one or more wireless sensor readers over a communication network.

98. The sensor network of claim 97, wherein the RF addressable sensors include a sensor element for measuring structural stress.

99. A method in a wireless sensor reader for obtaining sensor data from one or more radio frequency (RF) addressable sensors, comprising:

transmitting signals to the one or more RF addressable sensors wherein the signals initialize the one or more RF addressable sensors;

interrogating the one or more RF addressable sensors to isolate an individual RF addressable sensor;

receiving sensor data from the isolated RF addressable sensor, wherein the received sensor data includes sensor identification information;

communicating sensor identification information to a processor external to the wireless sensor reader;

receiving sensor data processing information; and

processing the sensor data based on the received processing information.

100. The method of claim 83 wherein the received sensor processing information includes software for analyzing the received sensor data.

101. A method in a wireless sensor reader for obtaining sensor data from one or more radio frequency (RF) addressable sensors, comprising:

transmitting signals to the one or more RF addressable sensors, wherein the signals initialize the one or more RF addressable sensors;

interrogating the one or more RF addressable sensors to isolate an individual RF addressable sensor;

receiving sensor data from the isolated RF addressable sensor, wherein the received sensor data includes sensor processing information; and

processing the sensor data based on the received processing information.

102. The method of claim 101 wherein the received sensor processing information includes software for analyzing the received sensor data.

103. An radio frequency (RF) addressable sensor comprising:

one or more sensor elements;

a sensor interface having an analog to digital converter coupled to the one or more sensor elements;

at least one antenna;

an RF power and communication interface coupled to the at least one antenna and the sensor interface;

a controller coupled to the RF power and communications interface and the sensor interface; and

a memory coupled to the controller and the sensor interface, wherein the memory is configured to store a tag identification number;

wherein the sensor interface includes a memory, the memory including a sensor data table.

RADIO FREQUENCY IDENTIFICATION (RFID) BASED SENSOR NETWORKS

ABSTRACT OF THE DISCLOSURE

An RF addressable sensor network architecture is provided. The RF addressable sensor network includes one or more RF addressable sensors, one or more wireless sensor readers coupled to a communications network, and one or more end user devices coupled to the communications network. The RF addressable sensor network may also include a sensor network processor. An RF addressable sensor includes one or more sensor elements, one or more antennas for communicating with the wireless sensor reader, an RF power and communications interface, and RFID control module, and a sensor interface. The wireless sensor reader includes one or more antennas, a user interface, a controller, a network communications module, and an RF addressable sensor logic module.

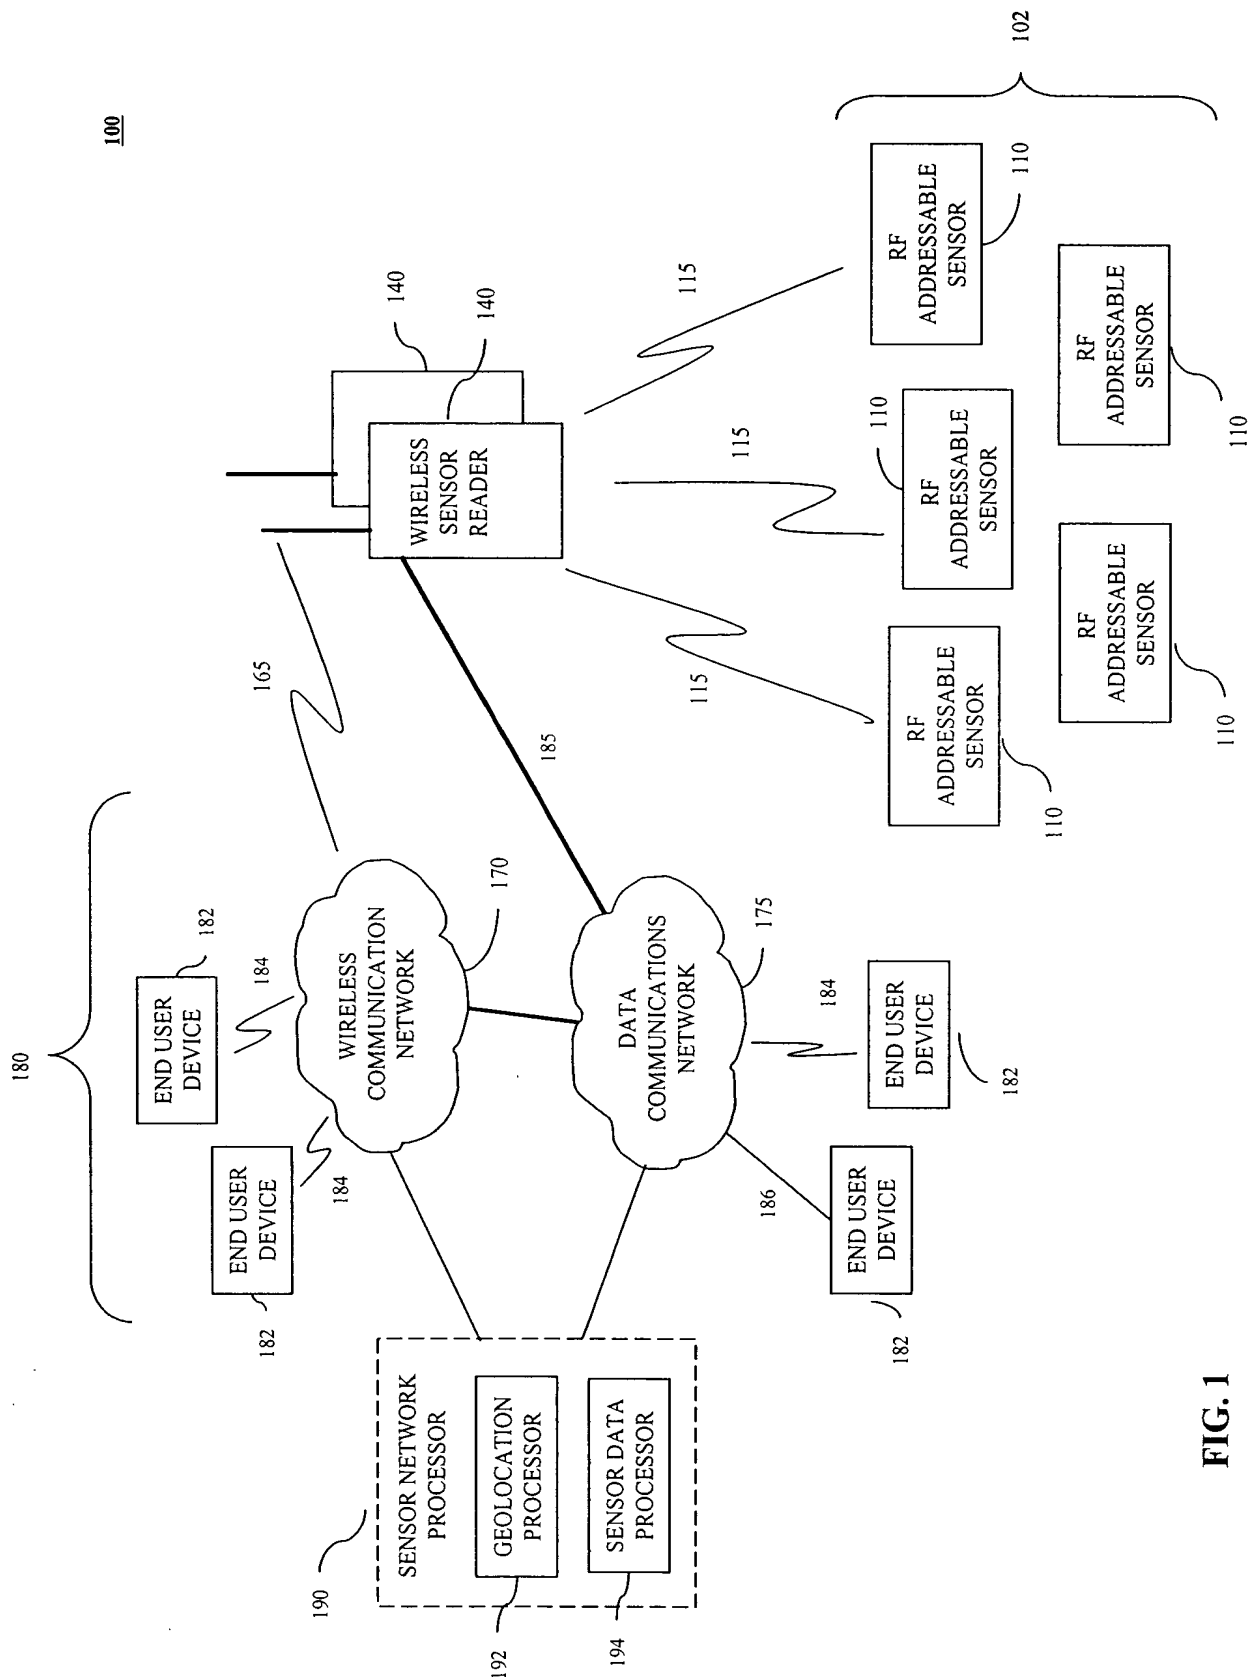


FIG. 1

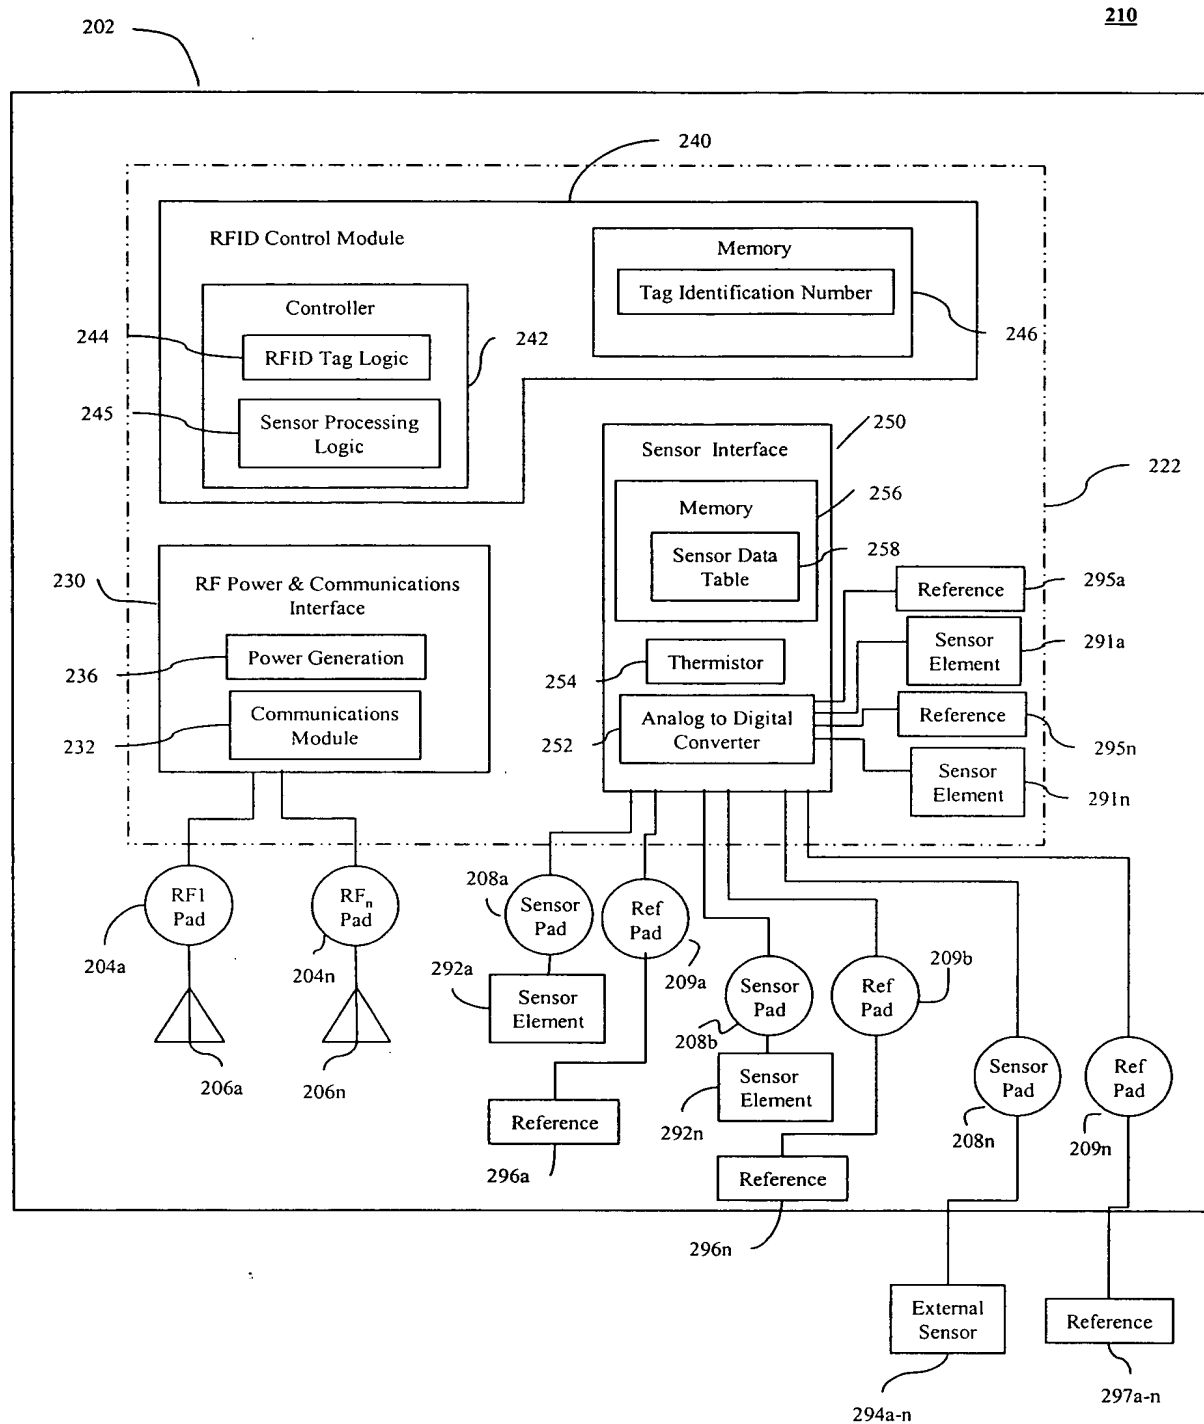


FIG. 2

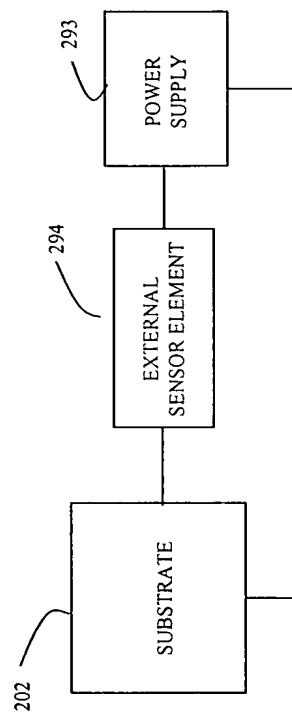


FIG. 2A

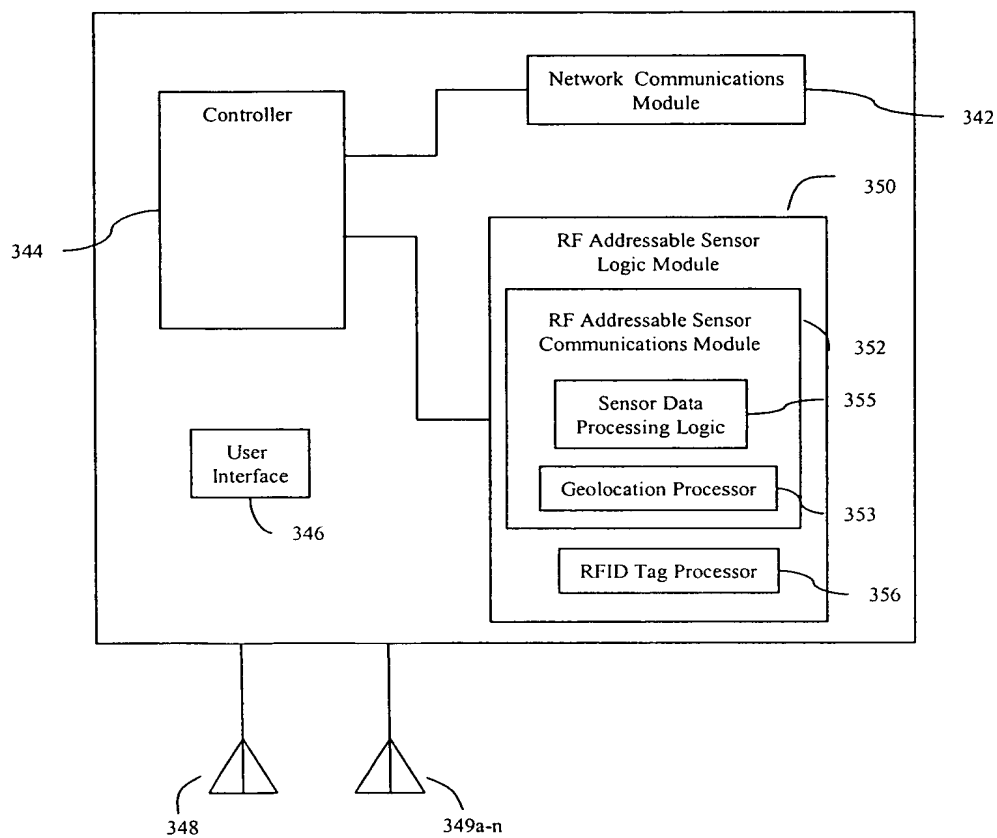


FIG. 3

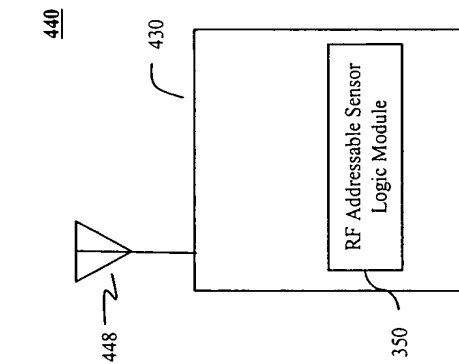


FIG. 4A

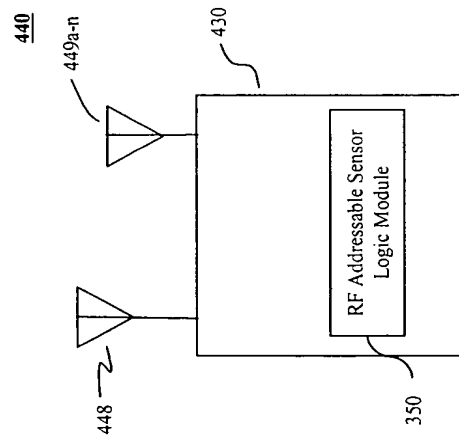


FIG. 4B

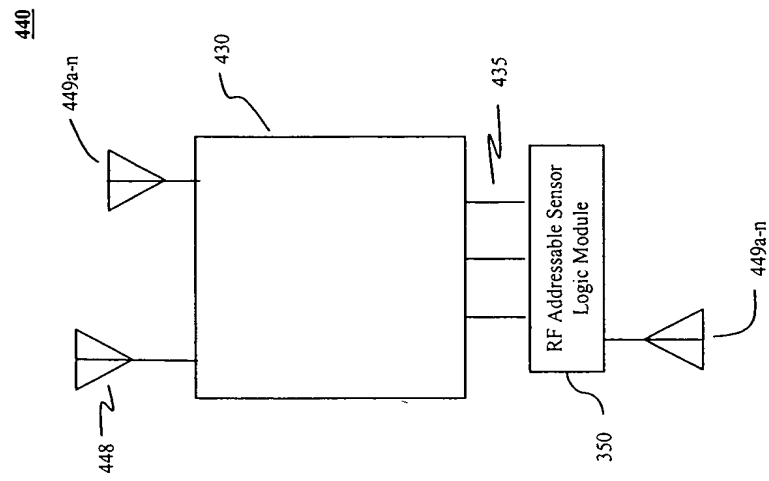


FIG. 4C

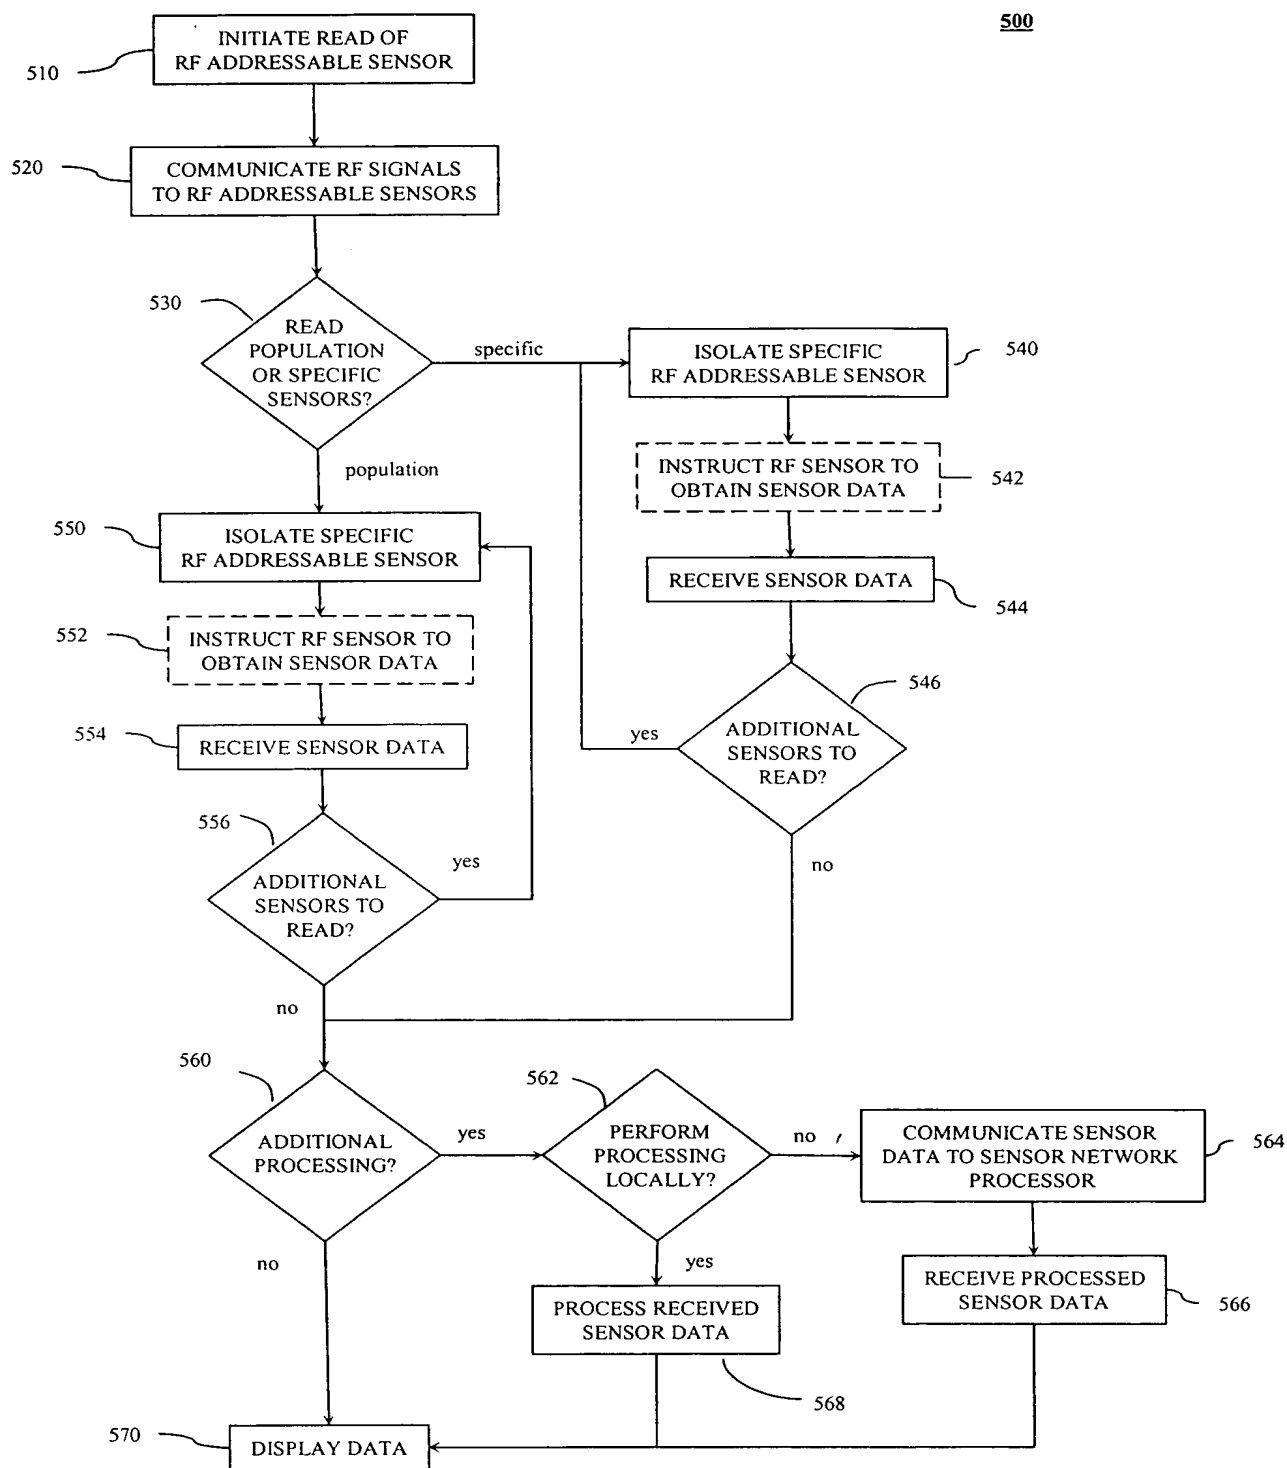


FIG. 5

602

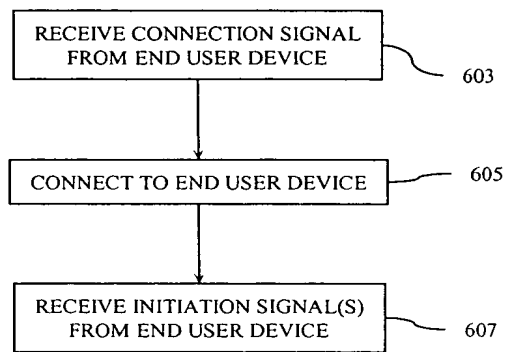


FIG. 6

700A

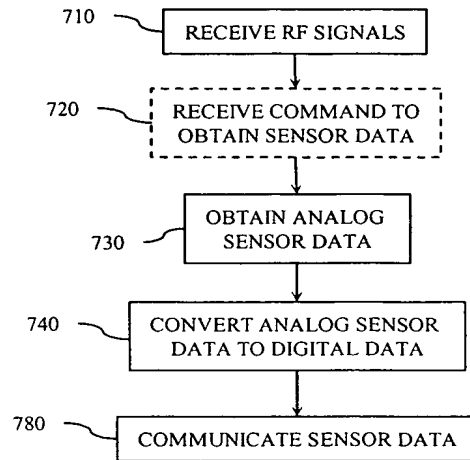


FIG. 7A

700B

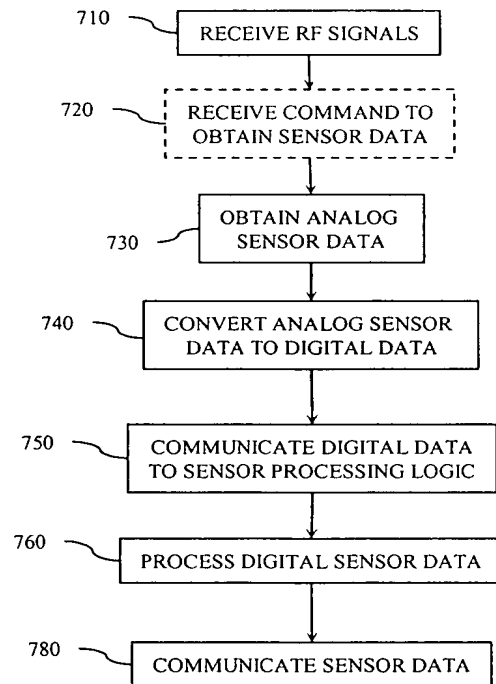


FIG. 7B

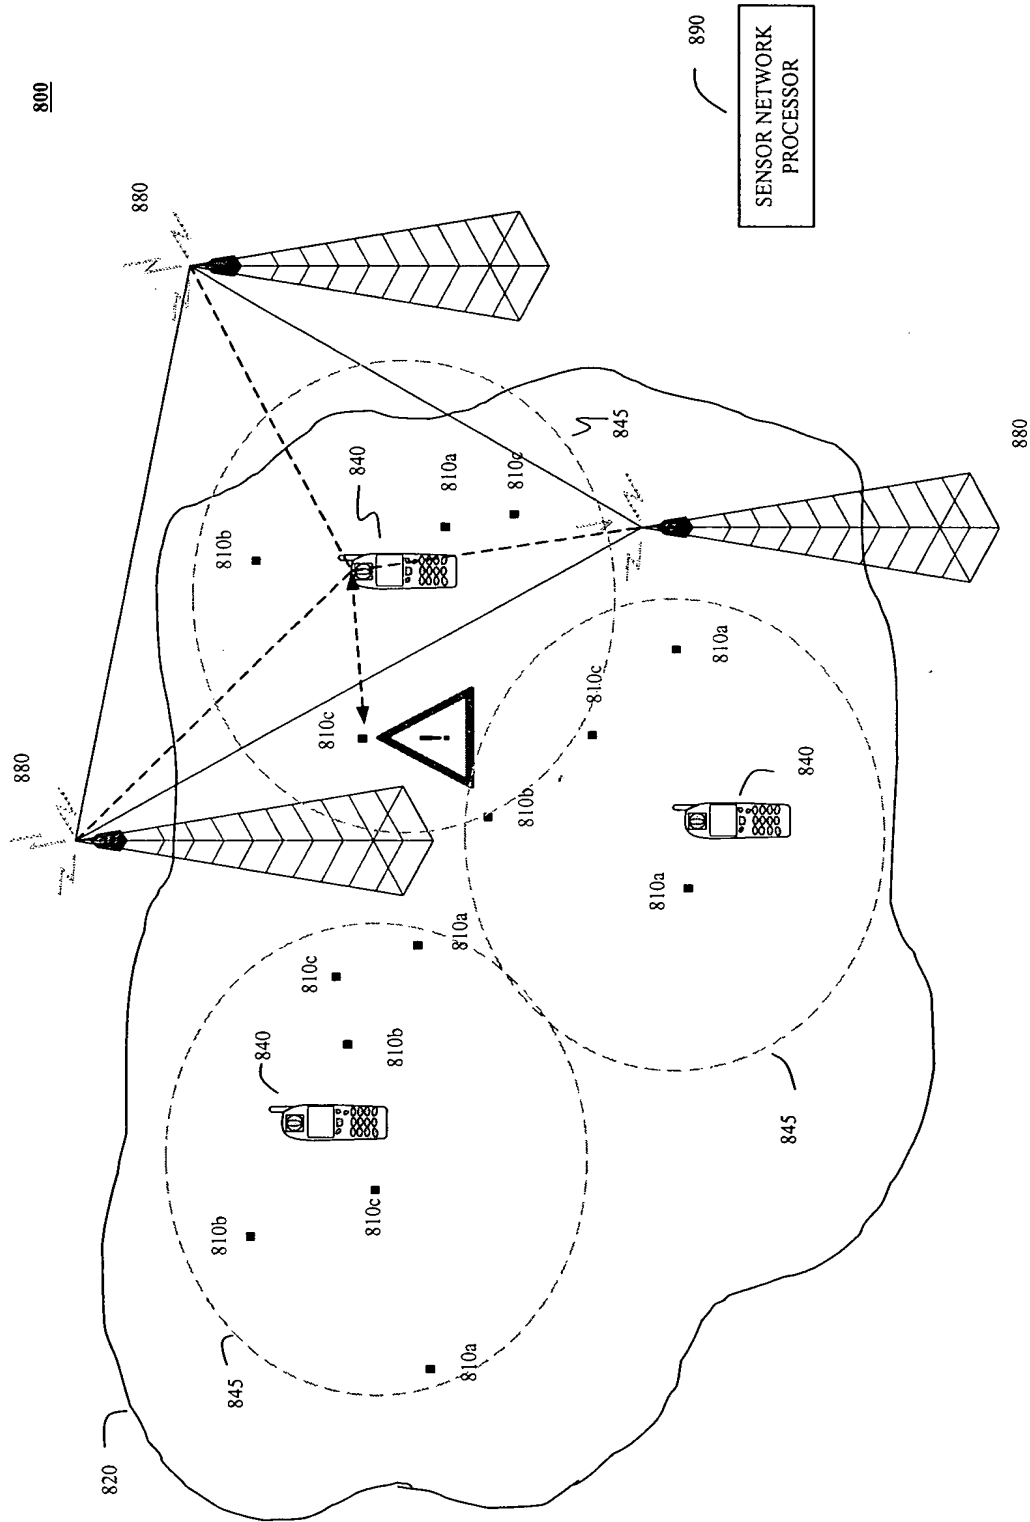


FIG. 8

900

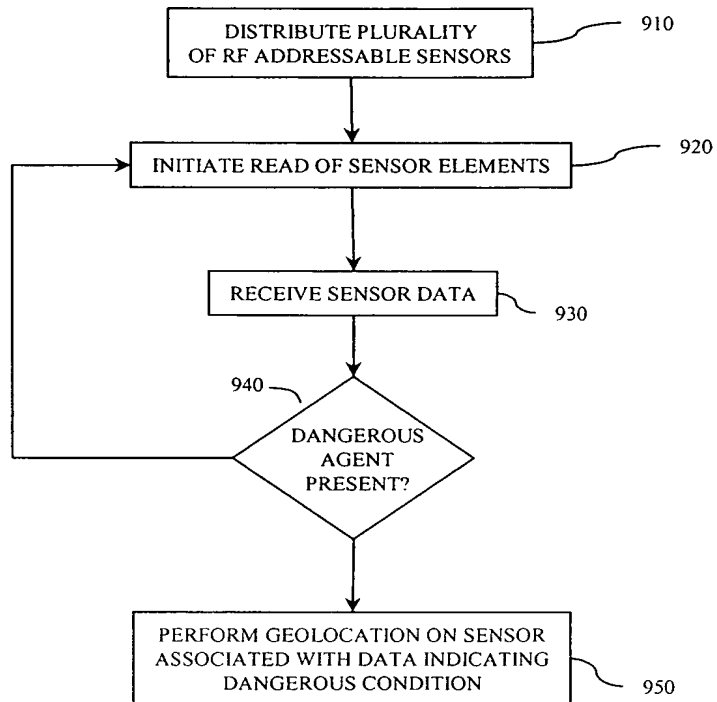


FIG. 9

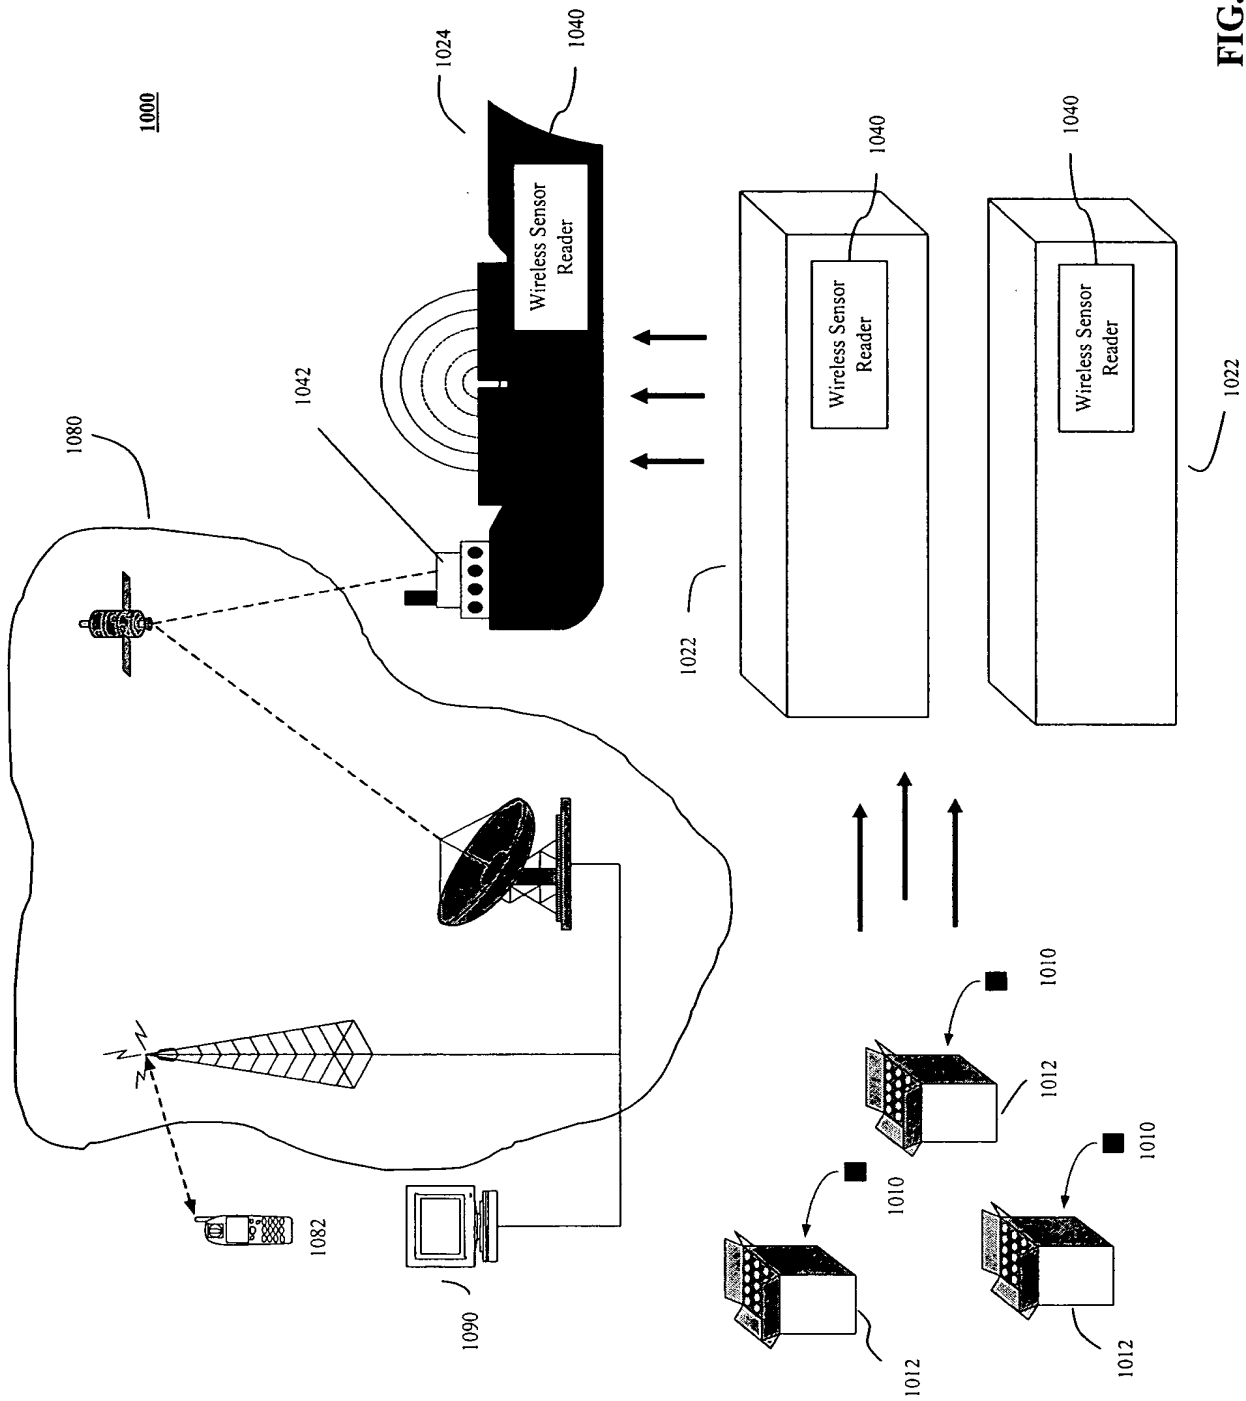


FIG. 10

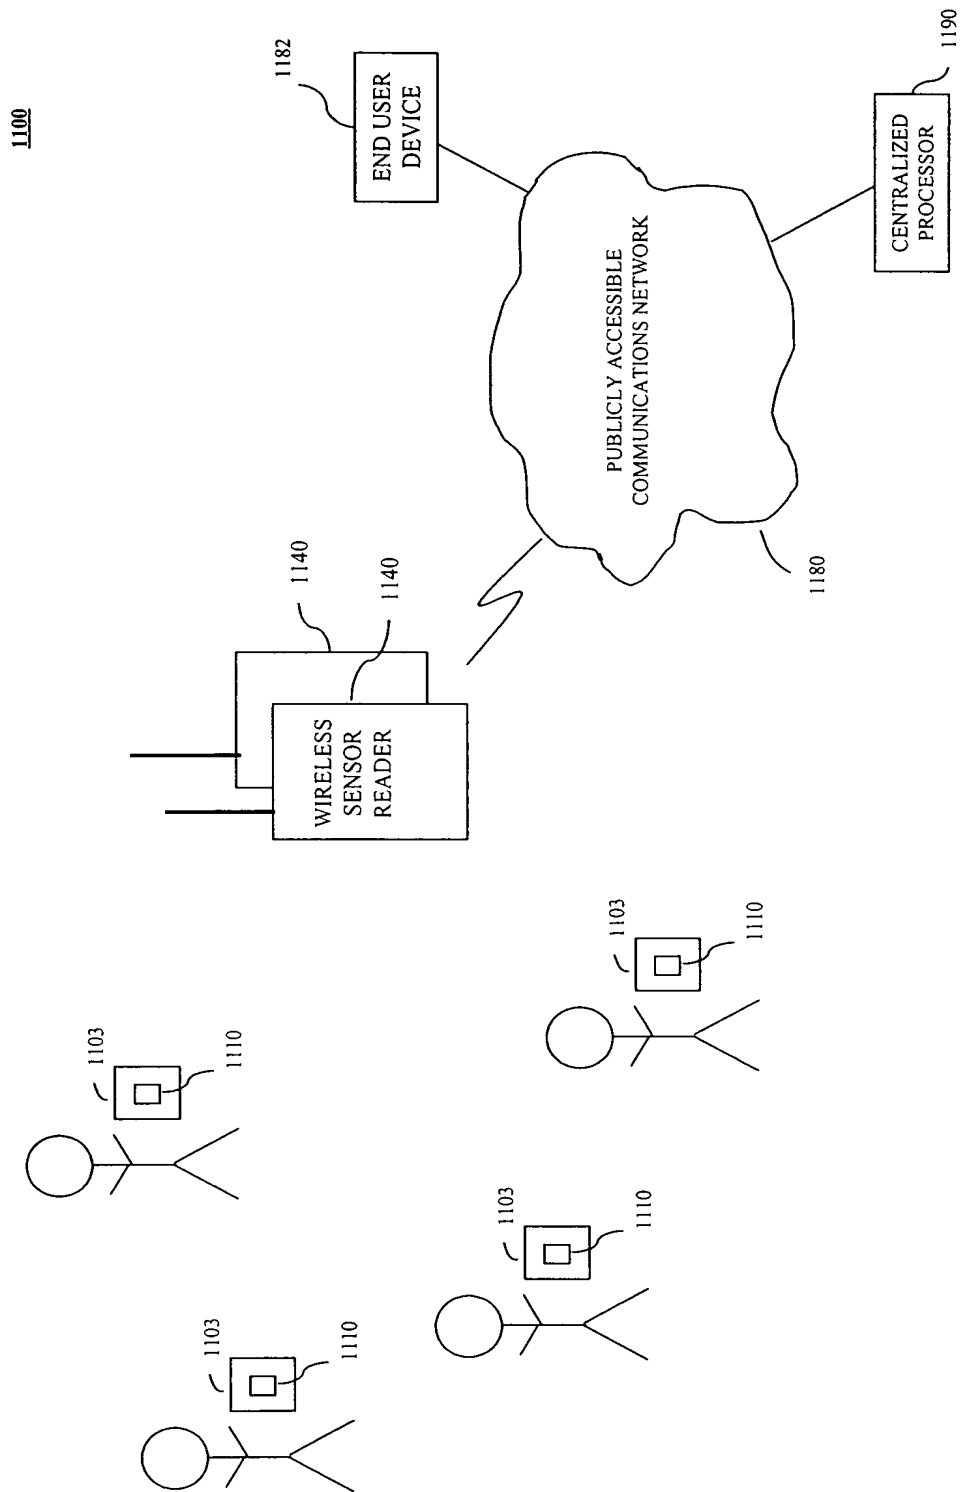


FIG. 11

1200

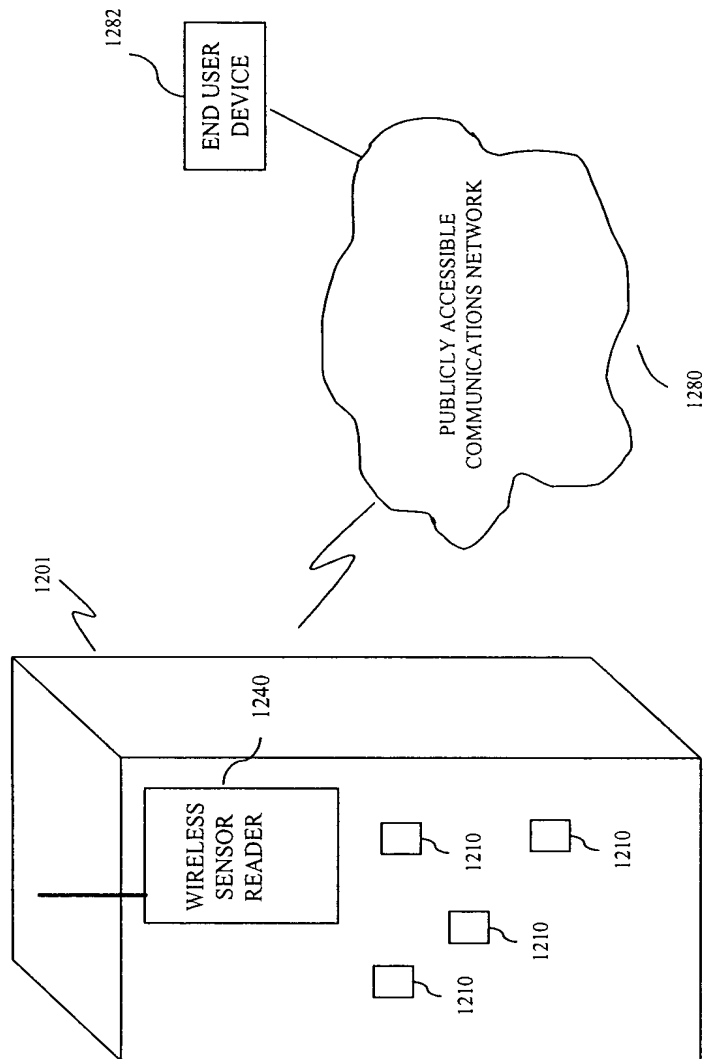


FIG. 12

RF ADDRESSABLE SENSOR

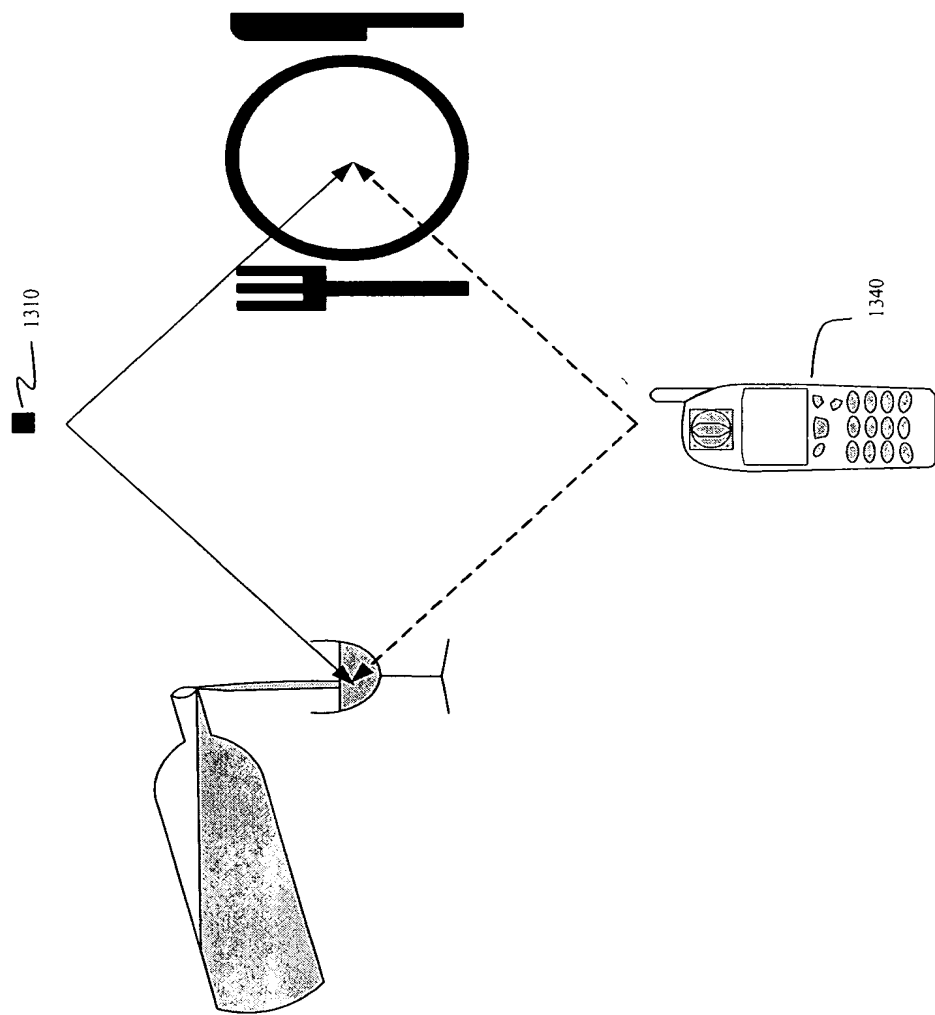


FIG. 13A

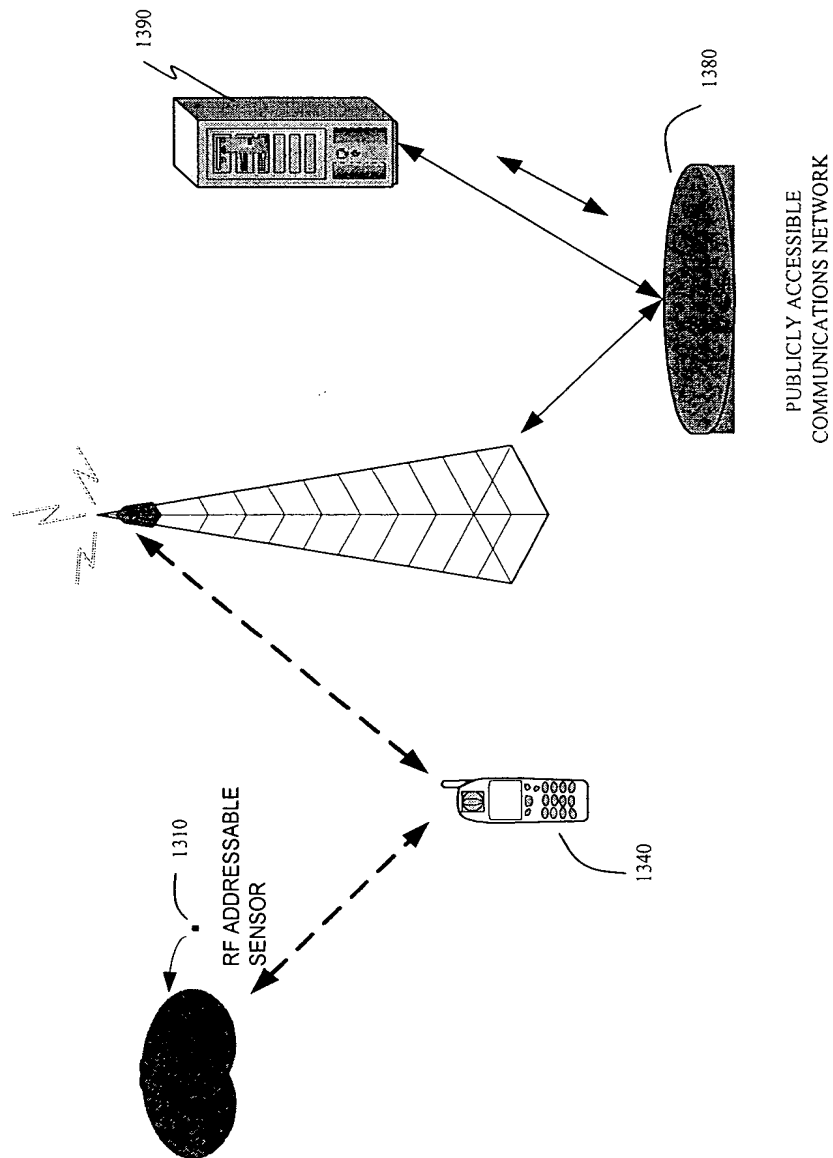


FIG. 13B

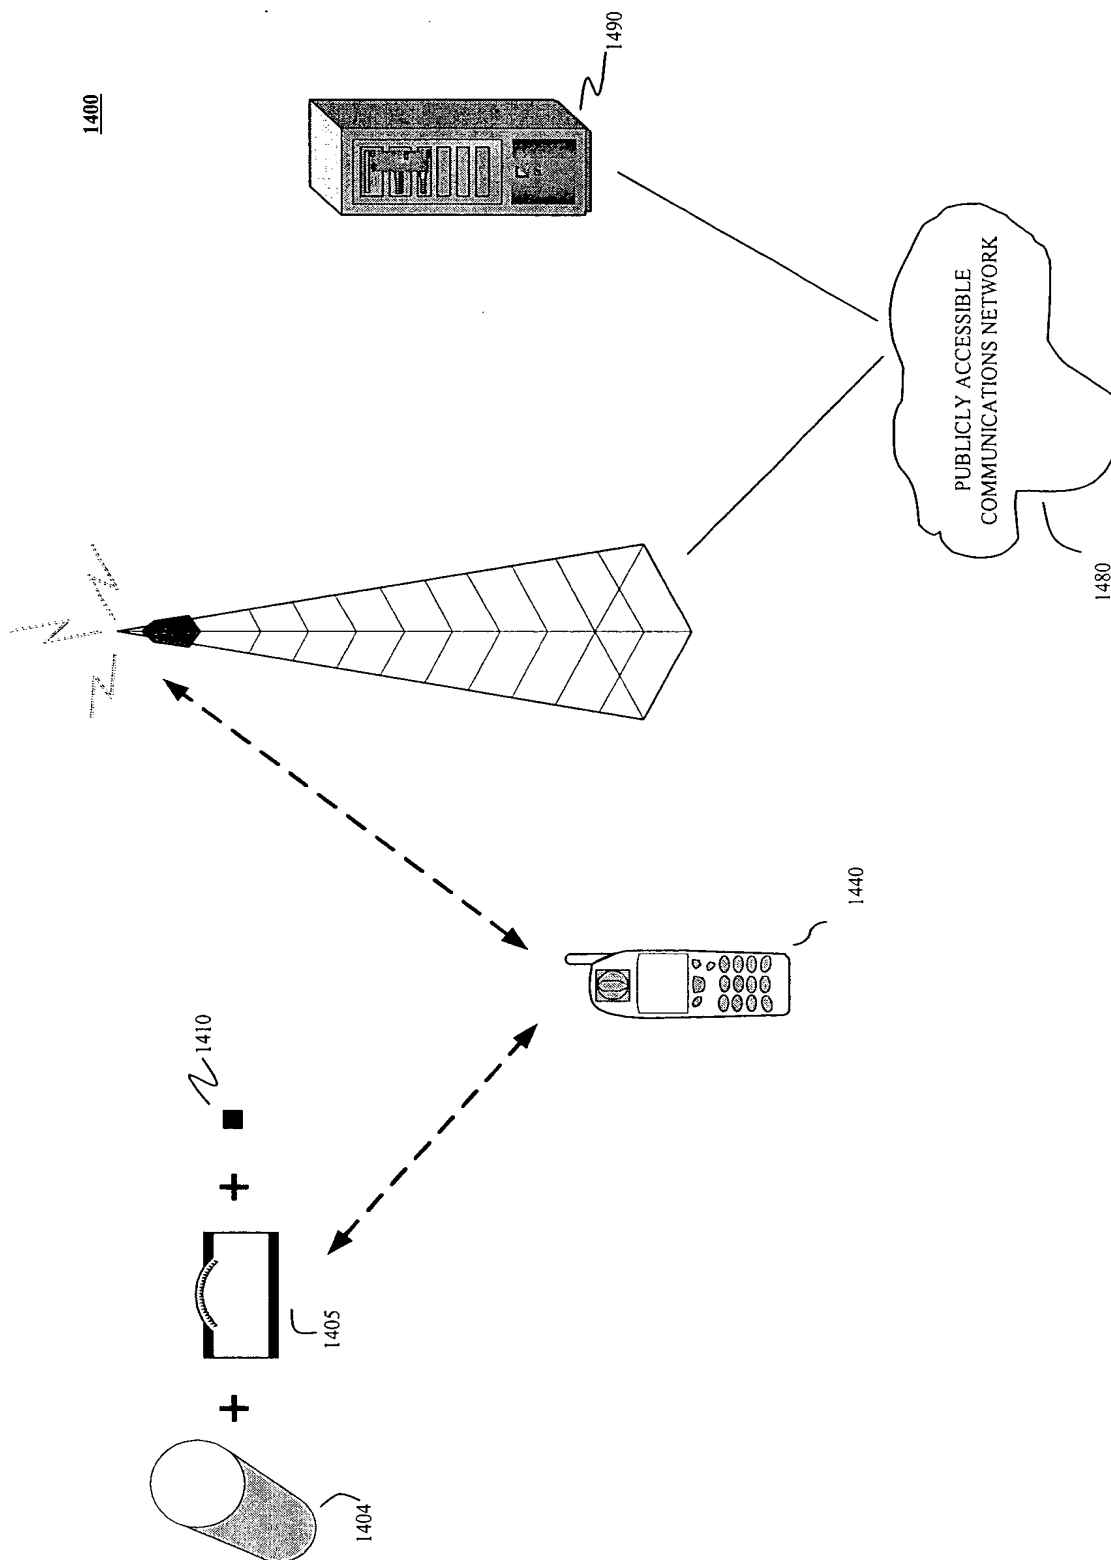


FIG. 14

1500

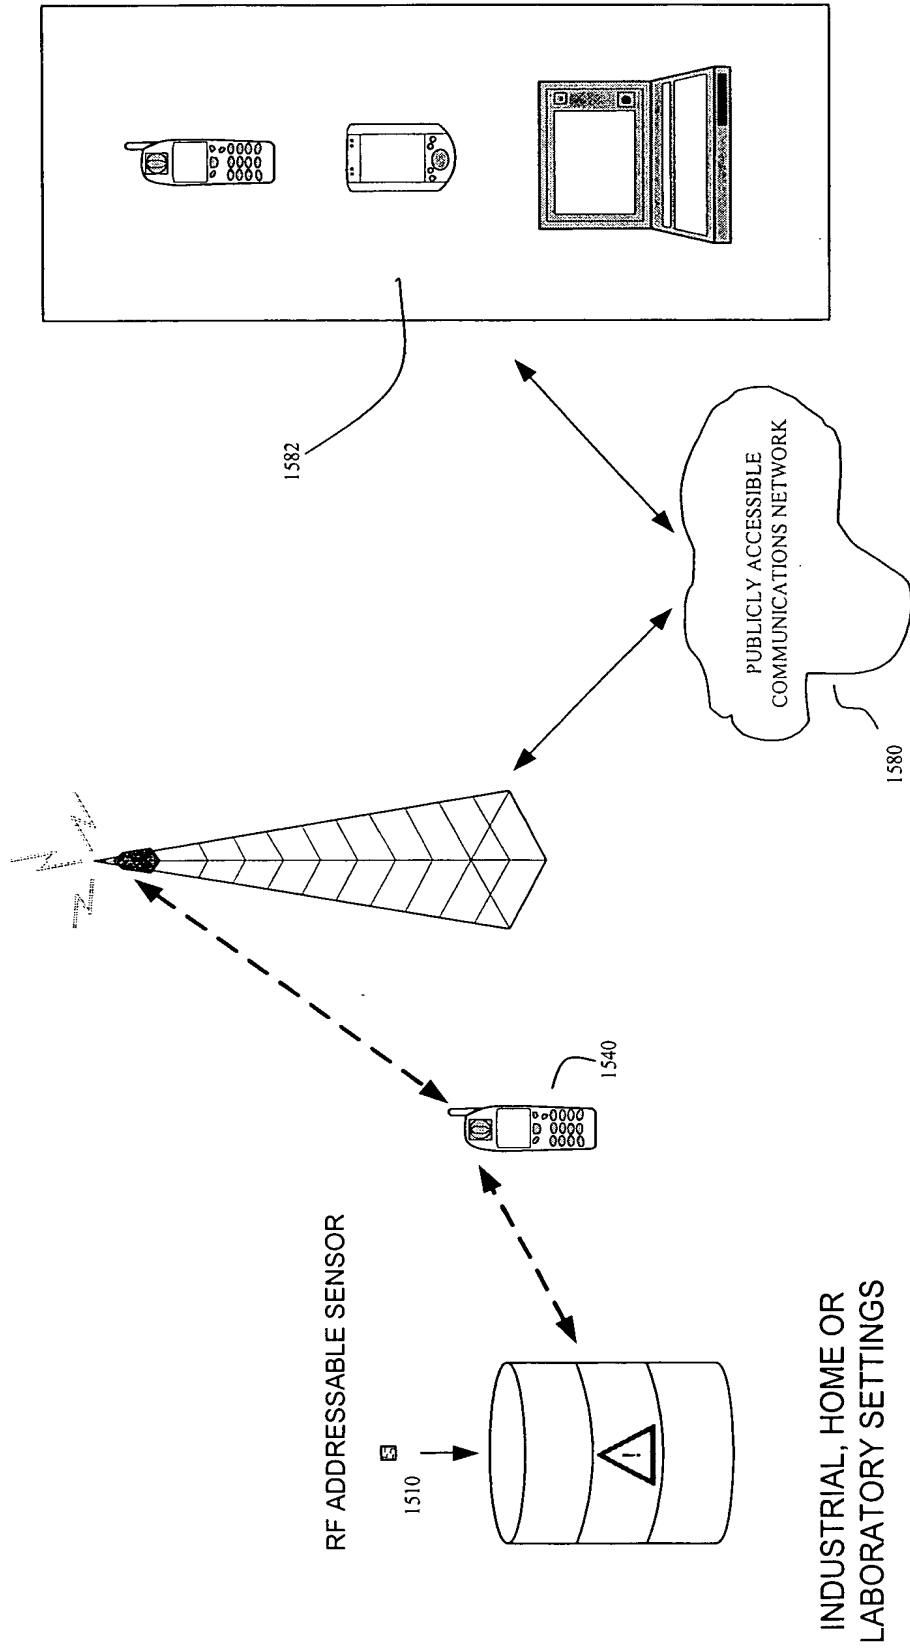


FIG. 15

1600

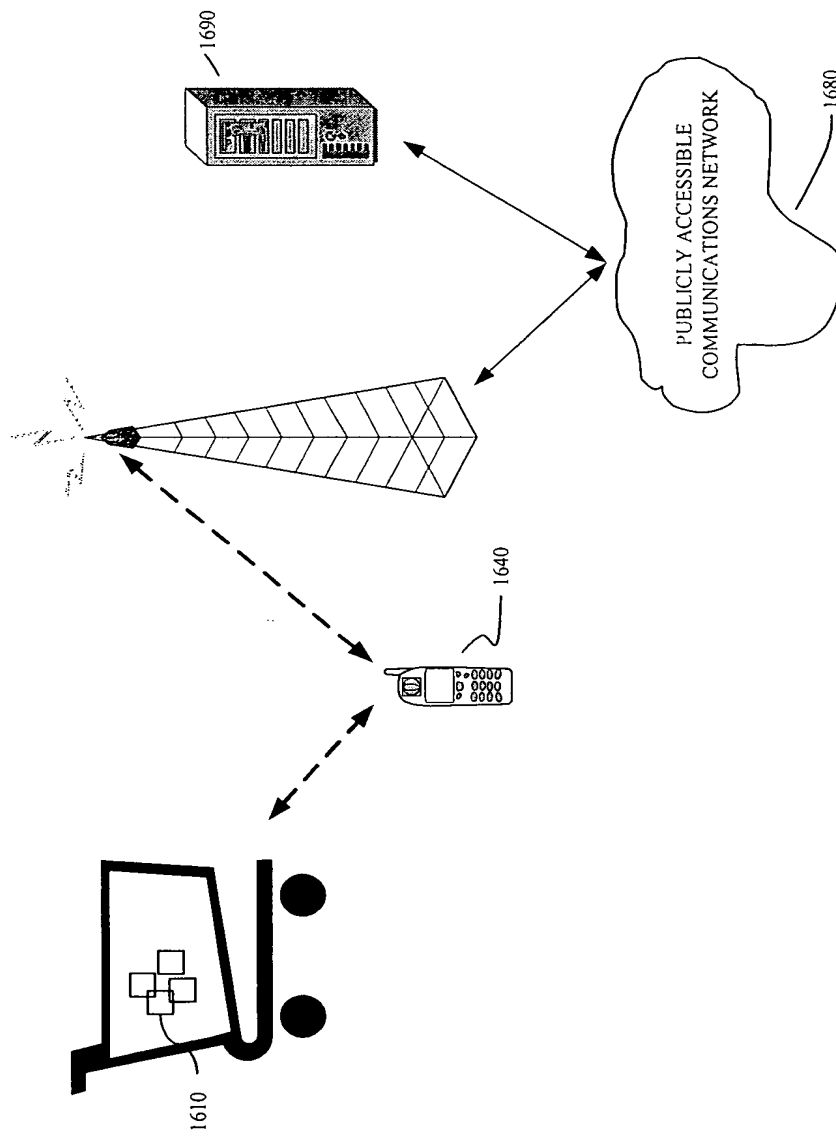


FIG. 16

1700

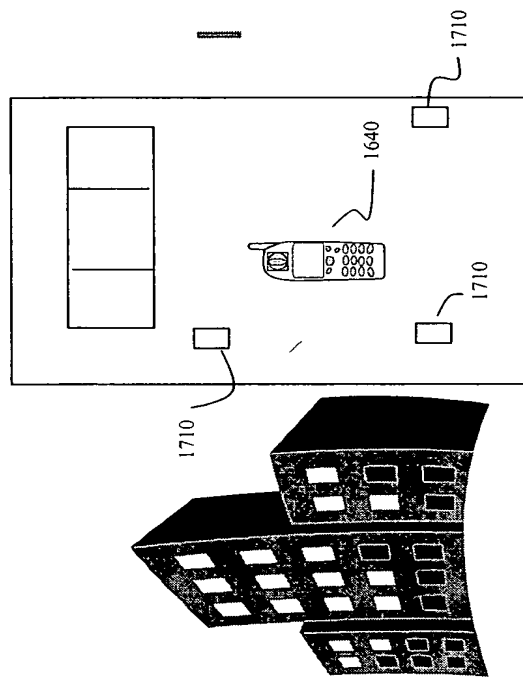


FIG. 17

INVENTOR INFORMATION

Inventor One Given Name:: William R
Family Name:: Bandy
Postal Address Line One:: 2406 Bell Branch Road
City:: Gambrills
State or Province:: Maryland
Country:: United States
Postal or Zip Code:: 21054
City of Residence:: Gambrills
State or Province of Residence:: Maryland
Country of Residence:: United States
Citizenship Country:: USA
Inventor Two Given Name:: John P
Family Name:: Peeters
Postal Address Line One:: 9505 Hemswell Place
City:: Potomac
State or Province:: Maryland
Country:: United States
Postal or Zip Code:: 20854
City of Residence:: Potomac
State or Province of Residence:: Maryland
Country of Residence:: United States
Citizenship Country:: United States

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 26111

APPLICATION INFORMATION

Title Line One:: Radio Frequency Identification (RFID) Ba
Title Line Two:: sed Sensor Networks
Total Drawing Sheets:: 19
Formal Drawings?:: Yes
Application Type:: Utility
Docket Number:: 1689.0360001
Secrecy Order in Parent Appl.?:: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 26111

CONTINUITY INFORMATION

This application is a:: NON PROV. OF PROVISIONAL
> Application One:: 60/513,740
Filing Date:: 10-24-2003

Source:: PrintEFS Version 1.0.1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Bandy *et al.*

Appl. No.: To Be Assigned

Filed: January 22, 2004

For: **Radio Frequency Identification
(RFID) Based Sensor Networks**

Confirmation No.: *To Be Assigned*

Art Unit: *To Be Assigned*

Examiner: *To Be Assigned*

Atty. Docket: 1689.0360001

Information Disclosure Statement

Commissioner for Patents
PO Box 1450
Alexandria, VA 22313-1450

Sir:

Listed on accompanying Form PTO-1449 are documents that may be considered material to the examination of this application, in compliance with the duty of disclosure requirements of 37 C.F.R. §§ 1.56, 1.97 and 1.98.

Where the publication date of a listed document does not provide a month of publication, the year of publication of the listed document is sufficiently earlier than the effective U.S. filing date and any foreign priority date so that the month of publication is not in issue. Applicants have listed publication dates on the attached PTO-1449 based on information presently available to the undersigned. However, the listed publication dates should not be construed as an admission that the information was actually published on the date indicated.

Applicants reserve the right to establish the patentability of the claimed invention over any of the information provided herewith, and/or to prove that this information may

not be prior art, and/or to prove that this information may not be enabling for the teachings purportedly offered.

This statement should not be construed as a representation that a search has been made, or that information more material to the examination of the present patent application does not exist. The Examiner is specifically requested not to rely solely on the material submitted herewith.

Applicants have checked the appropriate boxes below.

- ☐ 1. Statement under 37 C.F.R. 1.704(d). Each item of information contained in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart application and this communication was not received by any individual designated in 37 C.F.R. § 1.56(c) more than thirty days prior to the filing of this information disclosure statement.
- ☒ 2. Filing under 37 C.F.R. § 1.97(b). This Information Disclosure Statement is being filed within three months of the date of filing of a national application other than a continued prosecution application (CPA), OR within three months of the date of entry of the national stage as set forth in 37 C.F.R. § 1.491 in an international application, OR before the mailing date of a first Office Action on the merits OR before the mailing of a first Office Action after the filing of a request for continued examination under 37 C.F.R. § 1.114. No statement or fee is required.
- ☐ 3. Filing under 37 C.F.R. § 1.97(c). This Information Disclosure Statement is being filed more than three months after the U.S. filing date AND after the mailing date of the first Office Action on the merits, but before the mailing date of a Final

Rejection, or Notice of Allowance, or an action that otherwise closes prosecution in the application.

- ☐ a. Statement under 37 C.F.R. § 1.97(e)(1). I hereby state that each item of information contained in this Information Disclosure Statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this Information Disclosure Statement. 37 C.F.R. § 1.97(e)(1).
- ☐ b. Statement under 37 C.F.R. § 1.97(e)(2). I hereby state that no item of information in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart foreign application and, to my knowledge after making reasonable inquiry, was known to any individual designated in 37 C.F.R. § 1.56(c) more than three months prior to the filing of this Information Disclosure Statement. 37 C.F.R. § 1.97(e)(2).
- ☐ c. Attached is our PTO-2038 Credit Card Payment Form in the amount of \$_____ in payment of the fee under 37 C.F.R. § 1.17(p).
- ☐ 4. Filing under 37 C.F.R. § 1.97(d) This Information Disclosure Statement is being filed more than three months after the U.S. filing date and after the mailing date of a Final Rejection or Notice of Allowance, but before payment of the Issue Fee. Enclosed find our PTO-2038 Credit Card Payment Form in the amount of \$_____ in payment of the fee under 37 C.F.R. § 1.17(p); in addition:

- ☐ a. Statement under 37 C.F.R. § 1.97(e)(1). I hereby state that each item of information contained in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this Information Disclosure Statement. 37 C.F.R. § 1.97(e)(1).
- ☐ b. Statement under 37 C.F.R. § 1.97(e)(2). I hereby state that no item of information in this Information Disclosure Statement was cited in a communication from a foreign patent office in a counterpart foreign application and, to my knowledge after making reasonable inquiry, was known to any individual designated in 37 C.F.R. § 1.56(c) more than three months prior to the filing of this Information Disclosure Statement. 37 C.F.R. § 1.97(e)(2).
- ☐ 5. The document(s) was/were cited in a search report by a foreign patent office in a counterpart foreign application. Submission of an English language version of the search report that indicates the degree of relevance found by the foreign office is provided in satisfaction of the requirement for a concise explanation of relevance. 1138 OG 37, 38.
- ☐ 6. A concise explanation of the relevance of the non-English language document(s) appears below:
- ☐ 7. Copies of the documents are submitted herewith.
- ☐ 8. Copies of the documents were cited by or submitted to the Office in an IDS that complies with 37 C.F.R. § 1.98(a)-(c) in Application No. _____, filed


_____, which is relied upon for an earlier filing date under 35 U.S.C. §
120. Thus, copies of these documents are not attached. 37 C.F.R. § 1.98(d).

It is respectfully requested that the Examiner initial and return a copy of the
enclosed PTO 1449, and indicate in the official file wrapper of this patent application
that the documents have been considered.

The U.S. Patent and Trademark Office is hereby authorized to charge any fee
deficiency, or credit any overpayment, to our Deposit Account No. 19-0036.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.



Jeffrey S. Weaver
Attorney for Applicants
Registration No. 45,608

Date: 1-22-04

1100 New York Avenue, N.W.
Washington, D.C. 20005-3934
(202) 371-2600

222329

FORM PTO-1449

INFORMATION DISCLOSURE STATEMENT

ATTY. DOCKET NO.

1689.0360001

APPLICATION NO.

To Be Assigned

FIRST NAMED INVENTOR

William Bandy

FILING DATE

1/22/2004

ART UNIT

To Be Assigned

U.S. PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUB-CLASS	FILING DATE
	AA1	20020167405	11/14/2002	Shanks <i>et al.</i>			
	AB1	10/687,690	10/20/2003	Shanks <i>et al.</i>			
	AC1	10/693,687	10/27/2003	Powell <i>et al.</i>			
	AD1	09/323,206	06/01/1999	Bandy <i>et al.</i>			
	AE1	20020149481	10/17/2002	Shanks <i>et al.</i>			
	AF1	10/073,000	02/12/2002	Shanks <i>et al.</i>			
	AG1	20030146783	08/07/2003	Bandy <i>et al.</i>			
	AH1	6,002,344	12/14/1999	Bandy <i>et al.</i>			
	AI1	6,031,454	02/29/2000	Lovejoy <i>et al.</i>			
	AJ1	20020078363	06/20/2002	Hill <i>et al.</i>			
	AK1	20030106931	06/12/2003	Wu <i>et al.</i>			

FOREIGN PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	COUNTRY	CLASS	SUB-CLASS	TRANSLATION
	AL1						Yes No
	AM1						Yes No
	AN1						Yes No
	AO1						Yes No
	AP1						Yes No

OTHER (Including Author, Title, Date, Pertinent Pages, etc.)

	AR	1	Rick Merritt; "From Sea to Shining Sea, War on terror prompts U.S. plans for a national sensor network, to give early warning of nuclear, chemical and biological threats"; Electronic Engineering Times, July 14, 2003; pp. 18, 19 and 24.
	AS	1	Roy Want; "RFID A Key to Automating Everything;" Scientific American, January, 2004; pp. 56, 57, 58, 59, 60, 61, 62, 63, 64 and 65.
	AT	1	(AP); "Bar codes matching drug to patient coming soon;" CNN.com, Health, December 9, 2003; pp. 1, 2 and 3.

EXAMINER	DATE CONSIDERED
----------	-----------------

EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to Applicant.

FORM PTO-1449

INFORMATION DISCLOSURE STATEMENTATTY. DOCKET NO.
1689.0360001APPLICATION NO.
*To Be Assigned*FIRST NAMED INVENTOR
William BondyFILING DATE
1/22/2004ART UNIT
*To Be Assigned***U.S. PATENT DOCUMENTS**

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUB-CLASS	FILING DATE
	AA2	6,486,780	11/26/2002	Garber <i>et al.</i>			
	AB2	5,640,002	06/17/1997	Ruppert <i>et al.</i>			
	AC2	6,134,548	10/17/2000	Gottzman <i>et al.</i>			
	AD2	20020170969	11/21/2002	Bridgelall			
	AE2	20030085267	05/08/2003	Piotrowski <i>et al.</i>			
	AF2	20020170961	11/21/2002	Dickson <i>et al.</i>			
	AG2	5,850,187	12/15/1998	Carrender <i>et al.</i>			
	AH2	20030120745	06/26/2003	Katagishi <i>et al.</i>			
	AI2	10/382,606	03/06/2003	Peeters			
	AJ2						
	AK2						

FOREIGN PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	COUNTRY	CLASS	SUB-CLASS	TRANSLATION
	AL2						Yes No
	AM2						Yes No
	AN2						Yes No
	AO2						Yes No
	AP2						Yes No

OTHER (Including Author, Title, Date, Pertinent Pages, etc.)

	AR	<u>2</u>	RFID Enables "Physical Browsing;" RFID Journal, May 6, 2003; pp. 1-2.
	AS	<u>2</u>	
	AT	<u>2</u>	

EXAMINER	DATE CONSIDERED
EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to Applicant.	