




US 20060038781A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0038781 A1**
Levin (43) **Pub. Date: Feb. 23, 2006**(54) **SYSTEMS AND METHODS FOR PROVIDING
HAPTIC EFFECTS****Publication Classification**(51) **Int. Cl.**
G09G 5/08 (2006.01)
(52) **U.S. Cl.** **345/163**(76) **Inventor: Michael D. Levin, Mountain View, CA
(US)**(57) **ABSTRACT**

Systems and methods for providing haptic effects are disclosed. One disclosed system comprises an actuator, a non-volatile memory configured to store a haptic effect profile, and a processor in communication with the actuator and the non-volatile memory. The processor may be configured to receive a sensor signal indicating a movement of a manipulandum, to identify an effect parameter associated with the sensor signal in the haptic effect profile, and to generate an output signal based, at least in part, on the effect parameter. The generated output signal may be configured to cause the actuator to output a haptic effect associated with the effect parameter.

Correspondence Address:

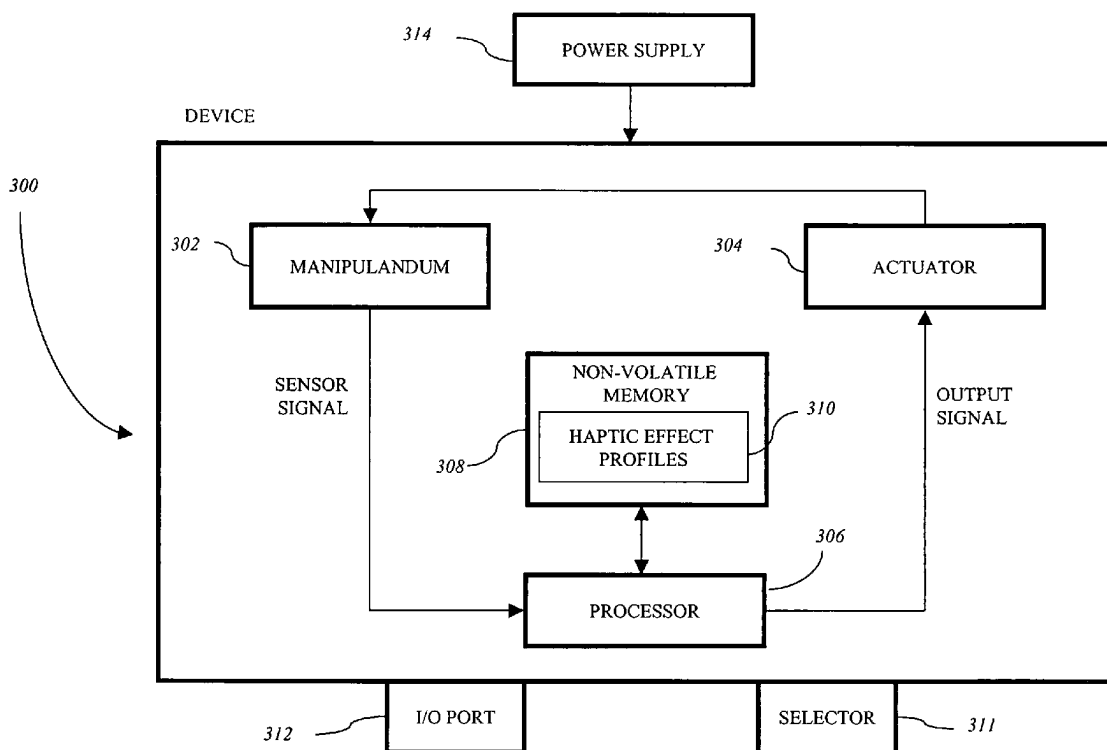**PATENT DEPARTMENT (51851)
KILPATRICK STOCKTON LLP
1001 WEST FOURTH STREET
WINSTON-SALEM, NC 27101 (US)**(21) **Appl. No.: 10/923,202**(22) **Filed: Aug. 20, 2004**

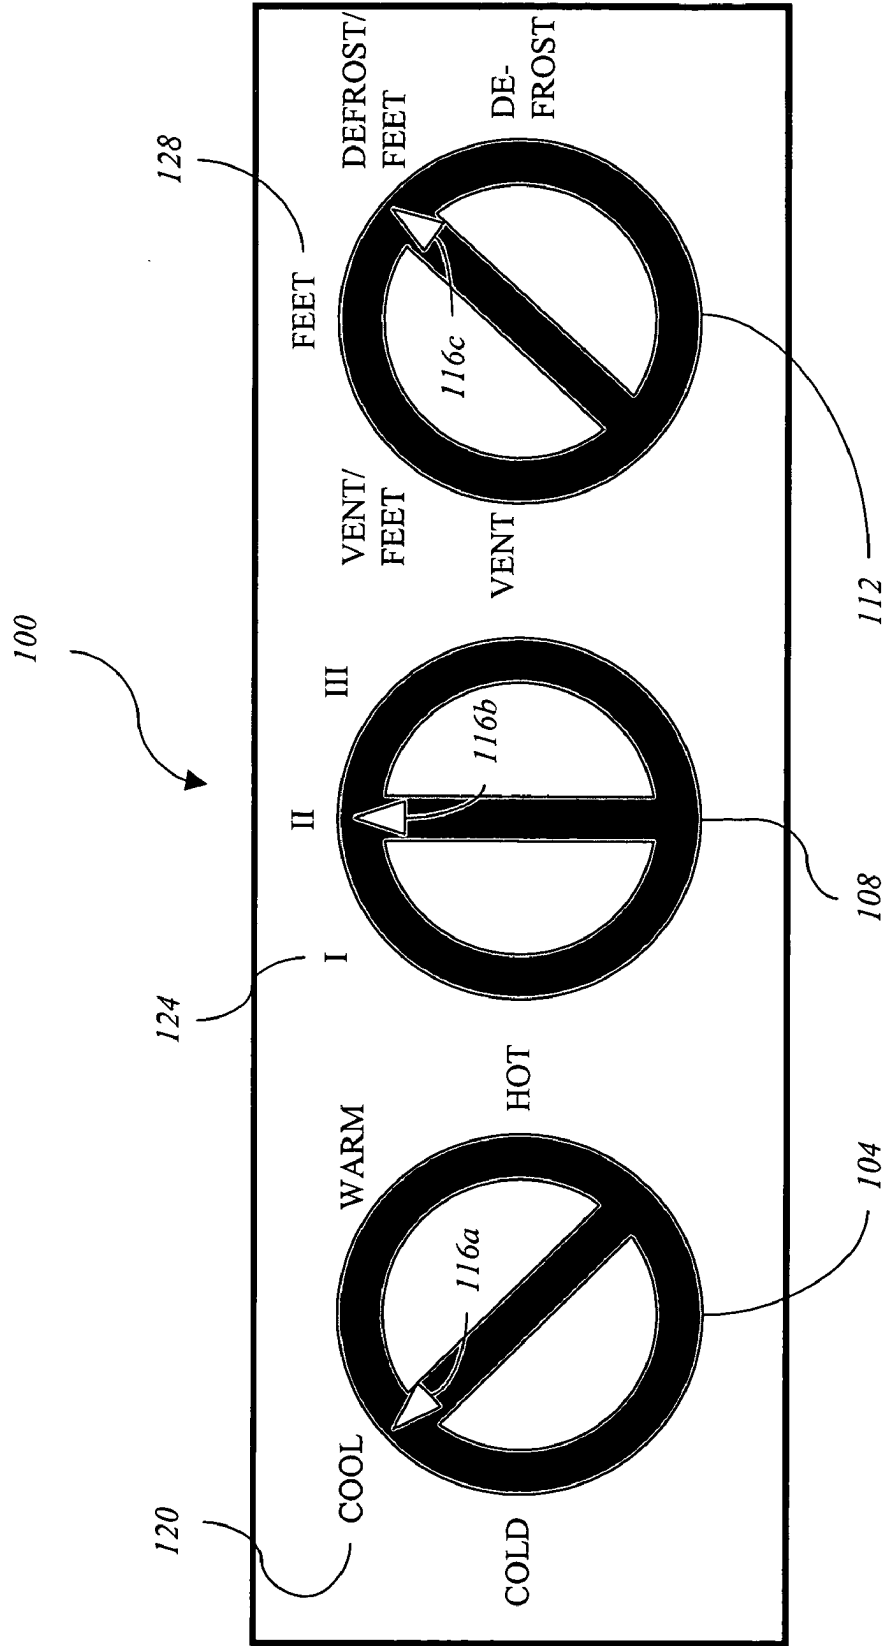


FIG. 1

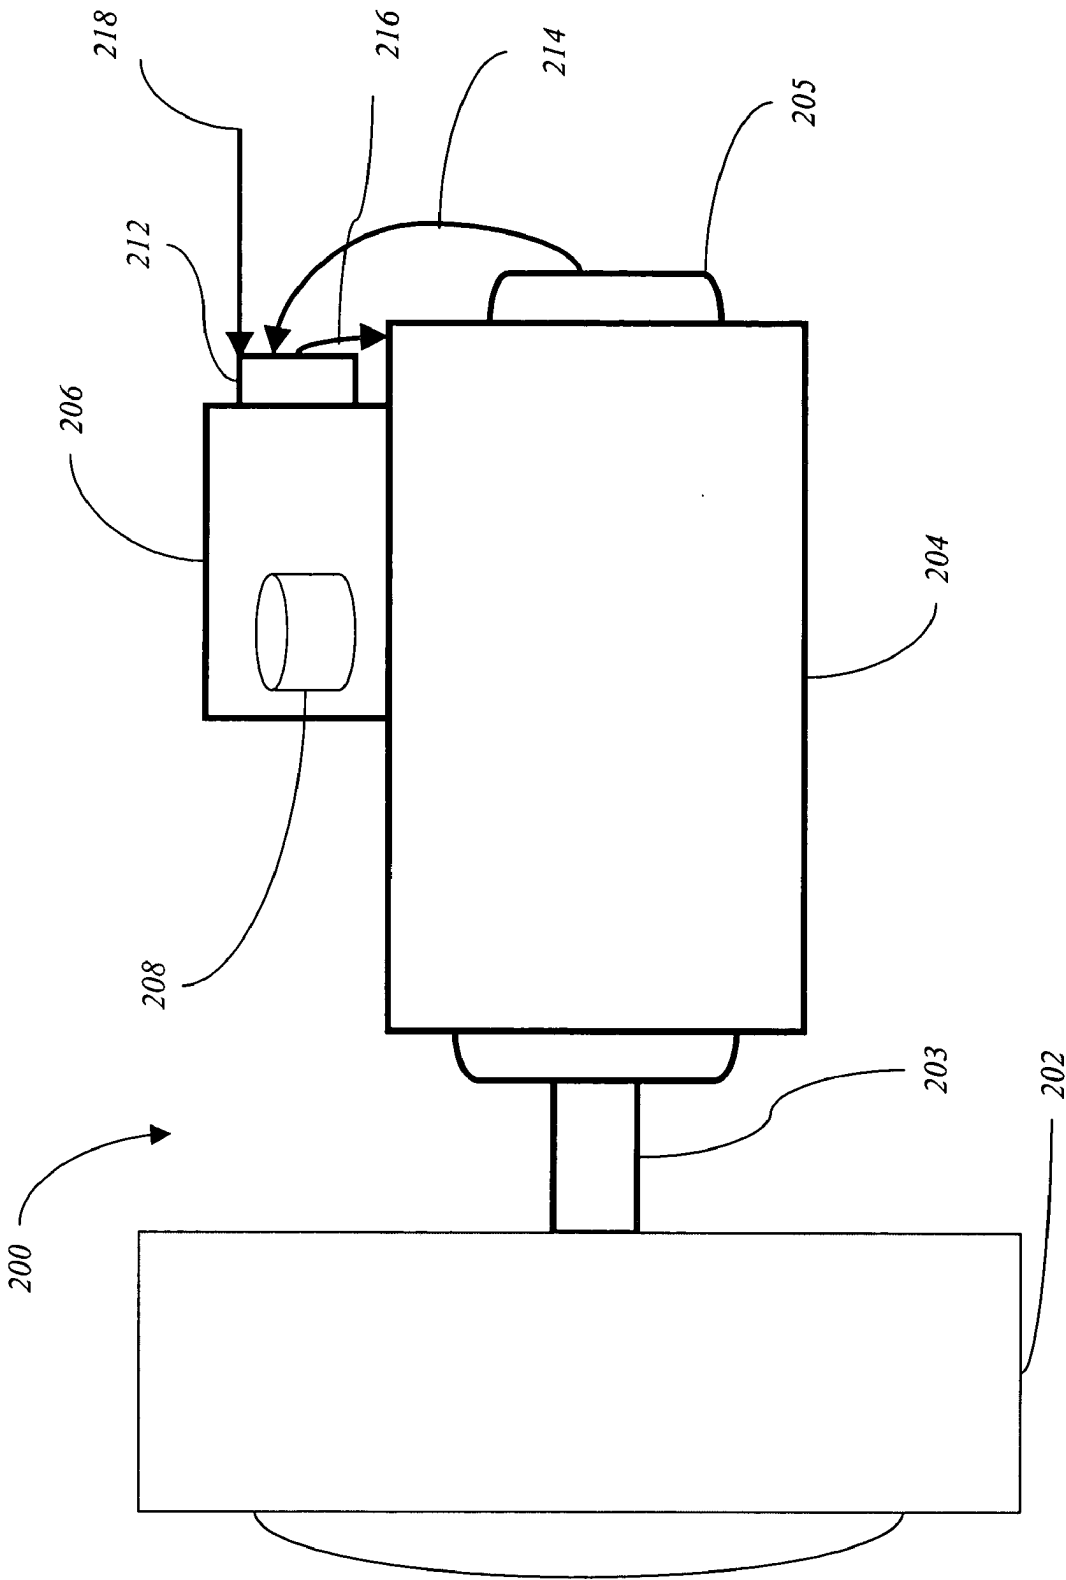


FIG. 2

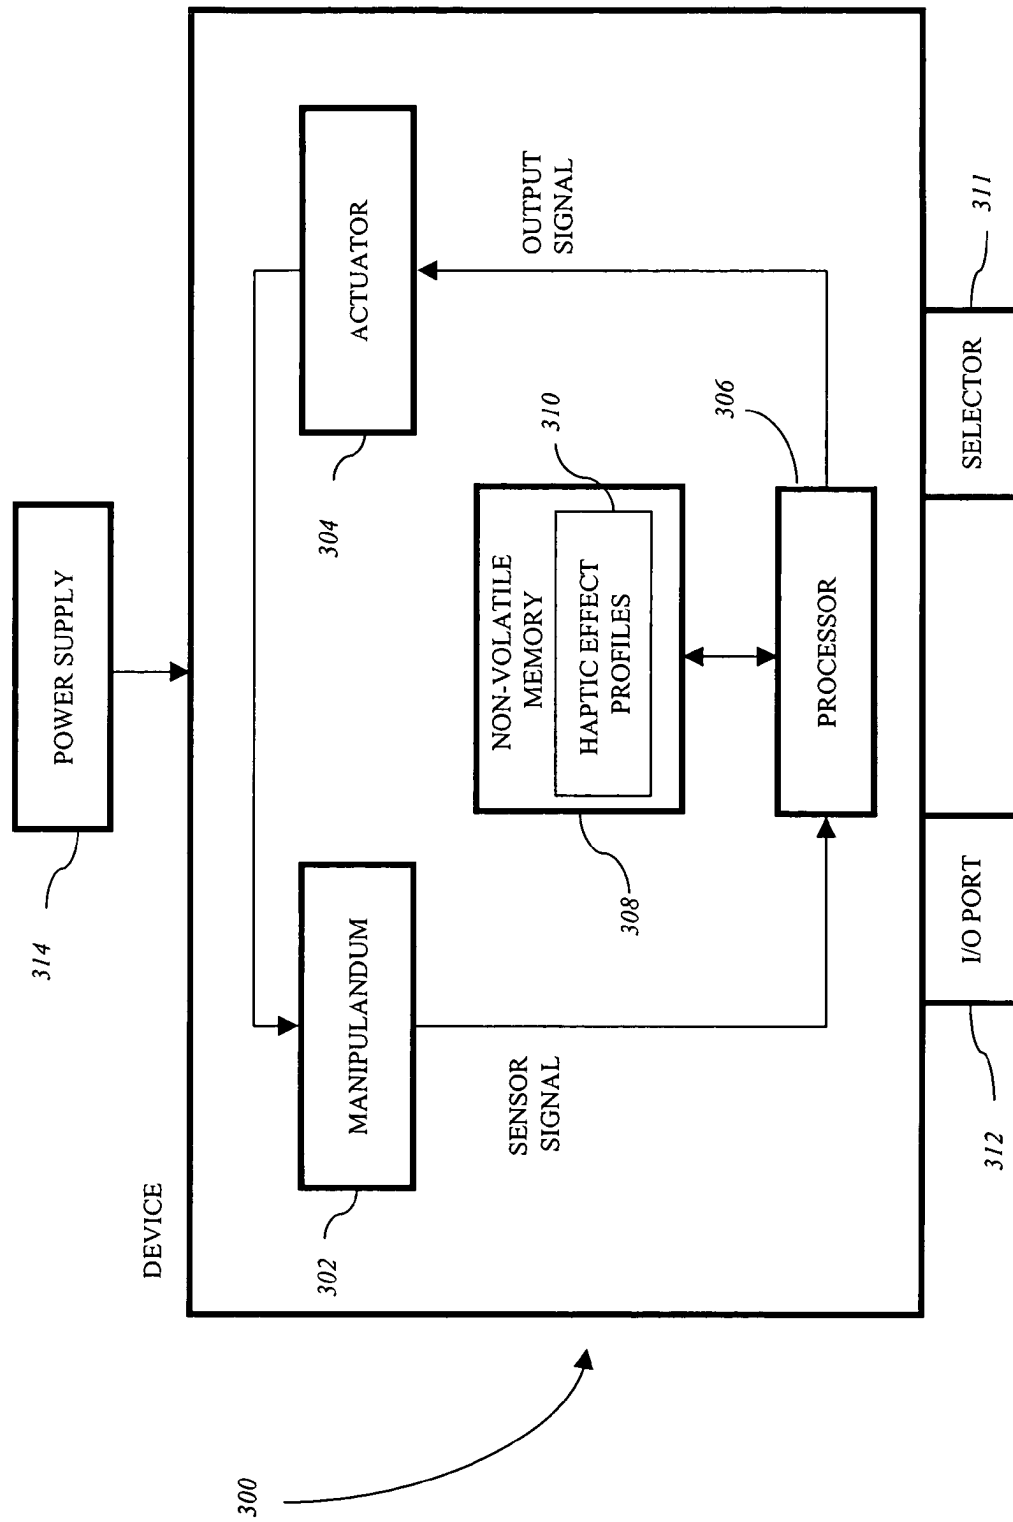


FIG. 3

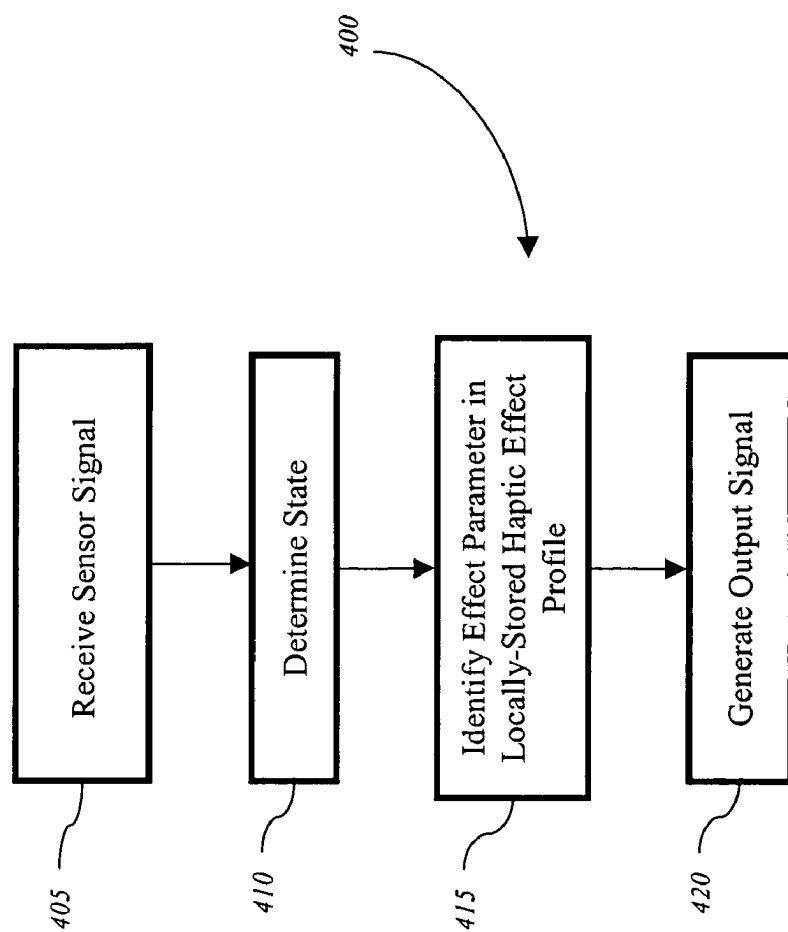


FIG. 4

SYSTEMS AND METHODS FOR PROVIDING HAPTIC EFFECTS

FIELD OF THE INVENTION

[0001] The present invention generally relates to providing haptic feedback. The present invention more particularly relates to systems and methods for providing haptic effects.

BACKGROUND

[0002] Electronic-device manufacturers strive to produce a rich interface for users. Conventional devices utilize visual and auditory cues to provide feedback to a user. In some interface devices, kinesthetic feedback (such as active and resistive force feedback), and/or tactile feedback (such as vibration, texture, and heat), is also provided to the user, more generally known collectively as "haptic feedback." Haptic feedback provides additional cues that enhance and simplify the user interface.

[0003] Some conventional mechanical control devices may be function-specific, for example, configured to implement a single haptic effect. Although able to provide haptic feedback to a user, function-specific mechanical control devices may require unique designs, components, and manufacturing processes to produce. Some conventional electronic haptic feedback devices may be capable of implementing a variety of haptic effects, but may require a host processor to store haptic effect profiles and parameters for implementing them.

[0004] Thus a need exists for effective systems and methods for providing haptic effects without a host processor.

SUMMARY

[0005] Embodiments of the present invention comprise systems and methods for providing haptic effects. One device embodying the present invention comprises an actuator, a non-volatile memory configured to store a haptic effect profile, and a processor in communication with the actuator and the non-volatile memory. The processor may be configured to receive a sensor signal indicating a movement of a manipulandum. The processor may further be configured to identify an effect parameter associated with the sensor signal in the haptic effect profile stored in the non-volatile memory, and to generate an output signal based, at least in part, on the effect parameter. The output signal may be configured to cause the actuator to output a haptic effect associated with the effect parameter.

[0006] This embodiment is mentioned not to limit or define the invention, but to provide an example of an embodiment of the invention to aid understanding thereof. Illustrative embodiments are discussed in the Detailed Description, and further description of the invention is provided there. Advantages offered by the various embodiments of the present invention may be further understood by examining this specification.

BRIEF DESCRIPTION OF THE FIGURES

[0007] These and other features, aspects, and advantages of the present invention are better understood when the following Detailed Description is read with reference to the accompanying drawings, wherein:

[0008] FIG. 1 illustrates a heating, ventilating, and air-conditioning control-panel incorporating one embodiment of the present invention;

[0009] FIG. 2 is an elevation view of a control knob haptic device according to one embodiment of the present invention;

[0010] FIG. 3 is a block diagram, illustrating one embodiment of a haptic device according to the present invention; and

[0011] FIG. 4 is a flowchart, illustrating a method for providing haptic effects according to one embodiment of the present invention.

DETAILED DESCRIPTION

[0012] Embodiments of the present invention comprise methods and systems for providing haptic effects. A variety of haptic effect profiles and effect parameters may be utilized in order to provide a multitude of haptic effects to the user of a device employing an embodiment of this invention. Embodiments of the present invention may be utilized by a broad array of devices and systems, including cell phones, personal digital assistants, cameras, camcorders, MP3 players, home or automobile HVAC control-panels, navigation devices, audio reproduction devices, and other electronic and mechanical devices and systems.

[0013] An electronic pre-programmed haptic feedback device may incorporate a variety of technologies for providing haptic feedback, including both active and resistive technologies. Active haptic feedback devices, including, for example, devices incorporating motors, add energy to a system; resistive devices, such as devices incorporating brakes, remove energy from the system. Some active haptic feedback devices may incorporate a resistive element, such as a brake. Also, an active haptic feedback device (such as a motor) may be used as a resistive device (e.g. a generator).

[0014] Active haptic actuators may utilize, for example, alternating current (AC) or direct current (DC) electric motors and/or generators. Resistive haptic actuators may utilize, for example, electromagnetic brakes, magnetic particle brakes, magnetorheologic or electrorheologic brakes, or magnetic (non-friction) brakes. Electromagnetic brakes utilize a magnetic core, a coil, and a magnetic target. When a current is applied to the coil, the magnetic core acts upon the magnetic target. Magnetic particle brakes utilize a powder comprising particles of a magnetic material. When a current is applied, the particles line up and cause the powder to expand. Rheologic fluid brakes utilize a fluid that changes viscosity when a current is applied. A magnetic brake generates a magnetic field, and when a piece of metal passes through the magnetic field, an anti-current is generated, causing a resistance to movement of the metal.

[0015] Referring now to the drawings in which like numerals indicate like elements throughout the several figures, FIG. 1 illustrates a heating, ventilating, and air-conditioning (HVAC) control-panel 100 incorporating one embodiment of the present invention. The HVAC control-panel 100 shown in FIG. 1 comprises a configuration similar to that found in passenger automobiles and light trucks. The HVAC control-panel 100 shown comprises several manipulanda, interface elements that a user of the HVAC control-panel 100 can manipulate. In other embodiments, a single

manipulandum may be used. The manipulanda shown in FIG. 1 comprise substantially-round control knobs. In other embodiments, other or additional manipulanda, such as sliders, switches, scroll wheels, trackballs, and joysticks may be used.

[0016] Each control knob shown in FIG. 1 is responsible for a different function. For instance, a temperature control knob 104 shown may be used by a user to control a temperature of air forced into a cabin of an automobile; a fan speed control knob 108 shown may be used to control the speed of a fan responsible for forcing warmed or cooled air into the cabin; and a location control knob 112 shown may be used to control the output location(s) for the forced air. The embodiment shown in FIG. 1 provides haptic feedback to the control knobs 104, 108, 112 to enhance the user's interaction with the HVAC control-panel 100. While knobs of differing physical structure may be used, the control knobs 104, 108, 112 shown comprise a substantially similar physical structure, but provide different haptic effects to a user of the HVAC control-panel 100.

[0017] A device according to the present invention may provide haptic feedback in various physical mechanisms, such as the control knobs 104, 108, 112 shown in FIG. 1. For example, the temperature control knob 104 shown in FIG. 1 may be set anywhere between a series of four temperature settings 120 located around the circumference of the temperature control knob 104 by pointing the indicator 116a toward the desired setting. For instance, in the embodiment shown, the indicator 116a of the temperature control knob 104 has been set substantially near the "COOL" temperature setting 120. A user of the HVAC control-panel 100 may select a different forced air temperature setting by adjusting the temperature control knob 104 to a different temperature setting 120. For example, to increase the temperature of the forced air, the user may turn the temperature control knob 104 clockwise to a setting nearer the "WARM" or "HOT" temperature settings 120.

[0018] The fan speed control knob 108 shown in FIG. 1 may be set on any one of three fan speed settings 124 located around the circumference of the fan speed control knob 108 by pointing the indicator 116b toward the desired setting. For instance, in the embodiment shown, the indicator 116b of the fan speed control knob 108 has been set to the intermediate fan speed setting 124, labeled "II" for identification. A user of the HVAC control-panel 100 may select a lower or higher fan speed by turning the fan speed control knob 108 to fan speed settings 124 "I" or "III," respectively.

[0019] The location control knob 112 shown in FIG. 1 may be set on any one of five location settings 128 located around the circumference of the location control knob 112 by pointing the indicator 116c toward the desired setting. For instance, in the embodiment shown, the indicator 116c of the location control knob 112 has been set to the location setting 128 labeled "DEFROST/FEET." Each location setting 128 of the location control knob 112 is associated with a different combination of open and closed baffles located behind a dashboard of the automobile comprising the HVAC control-panel 100. Each associated combination of open and closed baffles permits forced warmed or cooled air to escape into the cabin at varying locations.

[0020] For example, the "DEFROST/FEET" location setting 128 permits the "COOL" air forced at the intermediate

"II" speed to escape into the cabin of the vehicle at the driver's feet and at a defrosting vent located substantially near the base of the windshield of the automobile comprising the HVAC control-panel 100. The user may select a different location setting 128 by turning the indicator 116c of the location control knob 112 to a different setting; for instance, the user may select the "VENT" location setting 128 to permit the air to be forced through vents located in the dashboard of the automobile containing the HVAC control-panel 100.

[0021] The three control knobs 104, 108, 112 shown in FIG. 1 each comprise substantially similar physical components and structure, but may each be configured to provide a different haptic effect to the user of the HVAC control-panel 100. For example, each of the manipulanda 104, 108, 112 shown may comprise a non-volatile memory comprising a plurality of selectable haptic effect profiles, wherein each haptic effect profile may comprise its own set of effect parameters from which a processor device can identify one or more effect parameters associated with a received sensor signal. Each of the manipulanda may further comprise a selector switch configured to allow selection of a haptic effect profile associated with the activity the particular control knob will be performing in the HVAC control panel 100. In one such embodiment, when the HVAC control panel 100 is assembled, the assembler may switch the selector switch for each manipulandum to the appropriate setting prior to inserting the HVAC control panel 100 into a vehicle dashboard.

[0022] For example, a haptic effect profile associated with the temperature control knob 104 may comprise a set of effect parameters from which a processor device can identify effect parameters that are configured to output a resistance to the turning of the temperature control knob 104 that is least when the temperature control knob 104 is midway between the extreme temperature settings 120 "COLD" and "HOT." The resistance a user encounters when turning the temperature control knob 104 may increase as the user turns the temperature control knob 104 toward either of the two extreme temperature settings 120 "COLD" or "HOT."

[0023] The haptic effect profile associated with the temperature control knob 104 may further comprise effect parameters from which a processor device can generate an output signal configured to output a "stop" haptic effect to the user of the HVAC control-panel 100 when the indicator 116a points to the "HOT" temperature setting 120 and the user attempts to turn the temperature control knob 104 clockwise. Similarly, the haptic effect profile associated with the temperature control knob 104 may further comprise effect parameters from which a processor device can generate an output signal configured to output a "stop" haptic effect to the temperature control knob 104 when the indicator 116a points to the "COLD" temperature setting 120 and the user attempts to turn the temperature control knob 104 counter-clockwise.

[0024] The fan speed control knob 108 shown in FIG. 1, while comprising substantially the same physical structure as the temperature control knob 104, may be configured to output a different set of haptic effects. In one embodiment, the fan speed control knob 108 may comprise the same set of three selectable haptic effect profiles as the temperature control knob 104 and the location control knob 112. In such

an embodiment, a manufacturer of the HVAC control panel **100** may have previously selected the one haptic effect profile of the three that is associated with the fan speed control knob **108**.

[0025] The haptic effect profile associated with the fan speed control knob **108** may comprise a plurality of effect parameters from which a processor device can identify those related to a particular sensor signal, and may generate an output signal based, at least in part, on identified effect parameters. For example, one of these output signals may be configured to provide a “stop” effect to the user of the HVAC control panel **100** if the indicator **116b** is pointed at the “I” fan speed setting **124**, and the user attempts to turn the fan speed control knob **108** counter clockwise. Another of the output signals may be configured to provide a detent effect each time the user turns the fan speed control knob **108** to a location where the indicator **116b** points at one of the three fan speed settings **124**.

[0026] The selector associated with the location control knob **112** in such an embodiment may also have been switched to select the haptic effect profile in the location control knob’s **112** non-volatile memory that is associated with controlling the location of the warmed or cooled forced air. The haptic effect profile associated with the location control knob **112** may comprise, for example, effect parameters from which a processor device may generate output signals configured to provide a detent effect when the indicator **116c** points to one of the five location settings **128**. In one embodiment, the haptic effect profile associated with the location control knob **112** may comprise effect parameters from which a processor device can generate output signals configured to provide an assist effect that assists the user in turning the location control knob **112** to the next location setting **128** by adding a rotational force in the direction the user is turning the location control knob **112** until the indicator **116c** points to the next location setting **128**.

[0027] FIG. 2 shows an elevation view of a control knob haptic device **200**. The control knob haptic device **200** comprises a substantially similar physical structure as the control knobs (**104**, **108**, **112**) described with relation to FIG. 1. The control knob haptic device **200** shown comprises a manipulandum, a resistive haptic actuator **204**, a sensor device **205**, a processor **206**, and a memory **208** in one embodiment of the present invention. The manipulandum shown comprises a control knob **202**. In other embodiments, the manipulandum may comprise, for example, a slider, a switch, a scroll wheel, a trackball, or a joystick. The control knob **202** may comprise, for example, the location control knob (**112**) shown in the HVAC control-panel (**100**) of FIG. 1.

[0028] At its center, the control knob **202** is connected to a shaft **203**. The control knob **202** and shaft **203** rotate around a common axis. The actuator **204** shown comprises a DC motor. In other embodiments, the actuator **204** may comprise a resistive actuator, such as an electromagnetic, magnetic particle, magnetorheologic, electrorheologic, or magnetic brake. In yet other embodiments, a device according to the present invention may employ both one or more active actuators (such as a motor) and one or more resistive actuators (such as a brake). The DC motor actuator **204** shown comprises a rotor and a stator (both not shown). The

rotor is in direct communication with the shaft **203**. In other embodiments, the actuator **204** may further comprise a clutch between the rotor and the shaft **203**.

[0029] An actuator **204** according to the present invention may comprise other, non-rotary forms. For instance, in one embodiment, a slider control may comprise a haptic device, such as an electromagnetic brake to provide resistive haptic effects to a user. The actuator **204** shown comprises a sensor device **205**. The sensor device **205** is configured to detect a movement of the control knob **202** manipulandum, and to generate a sensor signal **214**.

[0030] The actuator **204** shown in FIG. 2 is not free to rotate (although in other embodiments it may rotate). The actuator **204** shown is not free to move in the axial direction of the shaft **203**. In other embodiments, the actuator **204** may be free to move in the axial direction of the shaft **203**. For instance, the actuator **204** may be incorporated in a control knob that may be pushed in addition to rotated, such as a volume/power knob commonly found on a control-panel of an automobile stereo.

[0031] The shaft **203** shown is constrained from moving in its axial direction, but is free to rotate as the user manipulates the control knob **202** manipulandum unless the actuator **204** resists the rotation of the control knob **202** in response to receiving an output signal **216** from the processor **206**. In other embodiments, the shaft **203** may be free to move in its axial direction. In one such embodiment, the actuator **204** resists the movement of the shaft **203** in the axial direction when actuated.

[0032] When the actuator **204** shown receives the output signal **216** in the form of an electrical current, it applies a force on the rotor. The force on the rotor may cause a resistance to the rotation of the shaft **203** in communication with the rotor, and the control knob **202** in communication with the shaft **203**. The resistance to the rotation of the control knob **202** may cause the control knob **202** to stop or may exert a force the user can overcome. When the actuator **204** receives an output signal **216** in the form of a pulsed electrical current, a haptic effect in the form of a vibration may be created.

[0033] The control knob haptic device **200** shown in FIG. 2 further comprises a processor **206**. The processor **206** is in communication with an I/O port **212**. The actuator **204** is also in communication with the I/O port **212**. The processor **206** may receive the sensor signal **214** from the sensor device **205** via the I/O port **212**. The processor **206** may identify one or more effect parameters associated with the sensor signal **214** in the locally-stored haptic effect profile in the memory **208**. The processor **206** may then generate an output signal **216** based, at least in part, on the identified effect parameters. The output signal **216** may be configured to cause the actuator **204** to output a haptic effect associated with the identified effect parameters to the control knob **202** manipulandum.

[0034] In the embodiment shown, the output signal **216** comprises an electrical current. The electrical current of the output signal **216** shown is supplied through the I/O port **212** by a power supply (not shown) as indicated by the arrow **218**. The processor **206** may control the actuator via the output signal **216** comprising the electrical current generated by the power supply. Processors may comprise, for example,

digital logical processors capable of processing input, executing algorithms, and generating output as necessary to create the desired tactile sensations in the control knob haptic device **200** in response to the sensor signal **214** received from the sensor device **205**. Such processors may comprise a microprocessor, an Application Specific Integrated Circuit (ASIC), and a state machine.

[0035] The processor **206** shown comprises the memory **208**. The memory **208** shown comprises a non-volatile memory. In other embodiments, the memory **208** may comprise a volatile memory, and/or may comprise a data storage device external to the processor **206**. The memory **208** shown comprises the haptic effect profile. In other embodiments the memory **208** may comprise a selectable plurality of haptic effect profiles. The haptic effect profile may comprise one or more effect parameters associated with the sensor signal **214** output by the sensor device **205** in communication with the control knob **202** manipulandum. In one embodiment, the haptic effect profile may comprise a plurality of effect parameters from which the processor **206** may generate an output signal or signals. The memory **208** shown may further comprise instructions configured to inform the processor **206** which effect parameter or parameters are associated with the sensor signal within the haptic effect profile.

[0036] The memory **208** shown may comprise, for example, an electrically-erasable programmable read-only memory (EEPROM), such as the type commonly used in laptop computers to store data when the computer is placed in a hibernation mode. The haptic effect profile in the embodiment shown may be downloaded to the memory **208** by flashing it onto an EEPROM using a signal comprising a voltage commonly used to program, erase, and reprogram memory devices in a personal computer. The haptic effect profile comprising the effect parameters may be downloaded to the memory **208** at different times in different embodiments. For instance, the haptic effect profile may be flashed onto the memory **208** during manufacture of the control knob haptic device **200**, during installation of the control knob haptic device **200**, or any other time when the memory **208** is in communication with a device capable of downloading the haptic effect profile, such as a programmable bus.

[0037] An effect parameter may be configured to define a characteristic, such as a magnitude, a duty cycle, a period, a waveform, or a duration, of a haptic effect based, at least in part, on the effect parameter. The processor **206** may identify the effect parameter(s) associated with the sensor signal in the haptic effect profile on the memory **208**. In an alternative embodiment, a haptic device according to the present invention may comprise an external memory **208** in communication with the processor **206**.

[0038] In another embodiment, the processor **206** may be in communication with media, for example computer-readable media, which stores instructions that, when executed by the processor **206**, may cause the processor **206** to perform the steps described herein. Embodiments of computer-readable media include, but are not limited to, an electronic, optical, magnetic, or other storage or transmission device capable of providing a processor, such as the processor in a web server, with computer-readable instructions. Other examples of media include, but are not limited to, a floppy

disk, CD-ROM, magnetic disk, memory chip, ROM, RAM, ASIC, configured processor, all optical media, all magnetic tape or other magnetic media, or any other medium from which a computer processor can read. Also, various other forms of computer-readable media may transmit or carry instructions to a computer, including a router, private or public network, or other transmission device or channel. The processor **206**, and the processing, described may be in one or more structures, and may be dispersed through one or more structures. The processor may comprise code for carrying out one or more of the methods (or parts of methods) described herein.

[0039] The processor **206** in the embodiment shown may be capable of generating a variety of output signals **216**, each configured to cause the actuator **204** to output a distinct haptic effect associated with one or more different effect parameters identified by the processor **206**. For example, the processor **206** may create effects, such as detents, between or at the location settings (**128**) found around the circumference of the location control knob (**112**) described with reference to **FIG. 1**. The processor **206** may create additional effects as well, including, for example, bumps, vibrations and stops by applying output signals **216** comprising various currents to the actuator **204** shown in **FIG. 2**.

[0040] The I/O port **212** shown in **FIG. 2** is in communication with the actuator **204**, the sensor device **205**, the processor **206**, and the power supply (not shown). The sensor device **205** may communicate to the processor **206** the sensor signal **214** relating the position of the control knob **202** through the I/O port **212**. The processor **206** may communicate to the actuator **204** through the I/O port **212** the output signal **216** comprising the electrical current, configured to cause the DC motor actuator **204** shown to act upon the rotor, providing the haptic effect associated with the identified effect parameters to the user of the control knob haptic device **200**.

[0041] The I/O port **212** shown is in communication with a power supply (as indicated by an arrow **218**). The power supply in one embodiment may comprise a power storage device, such as a battery. In such an embodiment, the I/O port **212** may be in communication with the power storage device. In yet other embodiments, the processor **206** may be in direct communication with a power storage device or another type of power supply. In one embodiment, the control knob haptic device **200** may comprise the power storage device, such as a battery capable of supplying the power necessary to cause the actuator **204** to output the haptic effect. In such an embodiment, the power storage device may be in communication with the processor **206** either directly or indirectly through the I/O port **212**.

[0042] **FIG. 3** is a block diagram, illustrating one embodiment of a device **300** according to the present invention. The device **300** shown may comprise, for instance, the control knob haptic device **200** described in relation to **FIG. 2**. In the embodiment shown, the device **300** includes a manipulandum **302**. The manipulandum **302** may comprise one of the control knob manipulanda discussed in relation to **FIGS. 1-2** or various other types of manipulanda (such as a roller, a trackball, a scroll wheel, a slider, a switch, etc.).

[0043] The device **300** shown further comprises an actuator **304**, such as a DC motor. The DC motor may comprise a device similar to the one discussed in relation to **FIG. 2** or

another device. The manipulandum **302** and actuator **304** are in communication with a processor **306**. The processor **306** in the embodiment shown in **FIG. 3** may be similar to the processor discussed in relation to **FIG. 2**. The processor **306** may receive sensor signals from a position sensor in communication with the manipulandum **302**. The processor **306** may also perform control algorithms, identify effect parameters, generate output signals, and send the generated output signals as feedback control signals to the actuator **304**.

[0044] The device **300** shown further comprises a non-volatile memory **308** (such as an EEPROM). In other embodiments, the memory **308** may comprise a volatile memory. The memory **308** comprises a selectable plurality of haptic effect profiles **310**. The haptic effect profiles **310** shown each may comprise a plurality of effect parameters. The processor **306** is in communication with the memory **308**. The memory **308** may comprise any suitable data storage device of a physical size appropriate to fit within the device **300**, and comprising a capacity sufficient to store the haptic effect profiles **310**. In another embodiment, the memory **308** may comprise a data storage device located outside of the device **300**, and may be in communication with the device **300**.

[0045] The processor **306** shown is in communication with the memory **308**. The processor **306** may identify at least one effect parameter associated with the sensor signal in the haptic effect profiles **310**. The processor **306** may then generate an output signal based, at least in part, on the identified effect parameters. The output signal may be configured to cause the actuator **304** to output a haptic effect associated with the effect parameter or parameters to the manipulandum **302**. The processor **306** may output the generated output signal to the actuator **304**. In other embodiments, the device **300**, or a plurality of related haptic devices **300**, may incorporate a plurality of actuators **304**. In one such embodiment, the processor **306** may output the output signal to the plurality of actuators **304**. In another such embodiment, each of the plurality of actuators **304** may be associated with a distinct haptic effect profile contained in the selectable plurality of haptic effect profiles **310**. The processor **306** in such an embodiment may output a distinct output signal to each of the plurality of actuators **304**. In the embodiment shown, the outputting of the output signal based, at least in part, on the identified effect parameters may be accomplished by sending an electrical current to the DC motor actuator **304**.

[0046] The device **300** further comprises a selector **311**. In one embodiment, the selector **311** shown may comprise, for example, a jumper configured provide an electrical connection between two points on a circuit board comprising a plurality of different combinations of points, wherein each different combination of two points on the circuit board may be associated with a distinct haptic effect profile **310** stored in the memory **308**. In another embodiment, the selector may comprise a different form (such as a switch). The processor **306** may be in communication with the selector **311**. The selector **311** may be configured select at least one desired haptic effect profile from the selectable plurality of haptic effect profiles **310**. In other embodiments, the selectable plurality of haptic effect profiles **310** may comprise a single haptic effect profile, and the device **300** may not comprise a selector **311**. In one embodiment, the selector **311** may also be configured to turn the device **300** on and off,

and/or to enable or disable a haptic effect profile stored in the memory **308**. In another embodiment, a haptic effect profile may be automatically or manually selected from a selectable plurality of haptic effect profiles **310** by using one or more digital input pins.

[0047] An output signal output by the processor **306** may comprise an electrical current, and may be generated with power supplied by a power supply **314**. The power supply **314** may comprise a power storage device, such as a battery. For example, in one embodiment, the power supply **314** may comprise a 12-Volt lead-acid battery as may be commonly found in an automobile. In one embodiment, the device **300** may comprise the power storage device. For example, in one such embodiment, the device **300** may comprise an "n"-size lithium-ion battery power supply **314** in communication with the processor **306**. Upon receiving the output signal based, at least in part, on the identified effect parameter or parameters, the actuator **304** may provide to the manipulandum **302** the haptic effect (or at least one of a plurality of haptic effects) associated with the identified effect parameters or parameters contained in the selectable haptic effect profile selected by the selector **311** from the selectable plurality of haptic effect profiles **310**.

[0048] The device **300** further comprises an input means, and/or an output means. For example, in the embodiment shown, the device **300** comprises an input/output (I/O) port **312** for performing unidirectional or bi-directional communication with external devices utilizing an embodiment of the present invention. The I/O port **312** may comprise, for example, a game port or a universal serial bus (USB) port. For instance, in one embodiment, the device **300** may be configured to download the selectable plurality of haptic effect profiles **310** from a programmable bus in communication with the I/O port **312** to the memory **308**. In one such embodiment, the selectable plurality of haptic effect profiles **310** may be modified or erased via communication through the input/output port **312** with a programmable bus.

[0049] In the embodiment shown, the device **300** receives power from an external power supply **314** via the I/O port **312**. In other embodiments, power may be supplied to the device **300** via alternative methods. For instance, power may be supplied directly to the processor, or by utilizing an internal power supply or a power storage device, such as a battery, incorporated into the device **300** as described above. Various embodiments may utilize additional components as well, such as an amplifier to amplify signals to the actuator.

[0050] Various methods and devices utilizing the present invention may be employed. For instance, one method according to the present invention comprises receiving a sensor signal from a sensor in communication with a manipulandum, identifying an effect parameter associated with the sensor signal in a locally-stored haptic effect profile, and generating an output signal based, at least in part, on the effect parameter. The sensor may sense a movement of the manipulandum in communication therewith, and the sensor signal may indicate such a movement.

[0051] In one embodiment, a processor in communication with the sensor and the actuator may carry out such a method. For example, the processor may identify one or more effect parameters in the locally-stored haptic effect profile and generating an output signal by receiving, gathering, incorporating, sorting, or combining the one or more

identified effect parameters. In one embodiment, such a processor may generate the output signal without communicating with any other processor device (such as a host processor). A generated output signal may be configured to cause an actuator to output a haptic effect associated with the effect parameter. For example, in one embodiment, the actuator may output the haptic effect to the manipulandum in communication with the sensor. In another embodiment, the actuator may output the haptic effect to an element other than the manipulandum, such as a device housing.

[0052] In one embodiment, the locally-stored haptic effect profile may comprise a plurality of selectable haptic effect profiles. A method according to the invention may further comprise selecting, either permanently or otherwise, at least one haptic effect profile from the selectable plurality of haptic effect profiles in the locally-stored haptic effect profile.

[0053] The actuator in one embodiment may comprise a plurality of actuators, and the output signal may be configured to cause the plurality of actuators to output the haptic effect associated with the effect parameter, for example to a single manipulandum or a corresponding plurality of manipulanda. One method according to the present invention may further comprise determining a state. For instance, a processor, such as the example processor (206) of FIG. 2, may determine from the sensor signal (214) whether the control knob (202) manipulandum has been turned to its furthest extremity, indicating a state in which the control knob (202) manipulandum may only be turned one direction. In one such embodiment, the effect parameter may be identified in relation to the determined state. In another such embodiment, the output signal may be generated in relation to the determined state. In one embodiment, the processor (206) may generate an output signal based, at least in part, on an effect parameter or parameters in the haptic effect profile or profiles.

[0054] The locally-stored haptic effect profile may comprise a haptic effect profile or selectable plurality thereof stored in a non-volatile memory. Methods embodying the present invention may further comprise erasing the locally-stored haptic effect profile(s). Similarly, some embodiments may further comprise modifying the locally-stored haptic effect profile(s). For instance, one method further comprises receiving the locally-stored haptic effect profile(s) from a programmable bus. A device may be in temporary communication with the programmable bus long enough to download the desired haptic effect profile or profiles. The programmable bus may electrically connect the processor device with various components of a computer by forming paths along which electrical signals comprising data may travel. In one embodiment, a downloaded haptic effect profile may be stored in a memory (such as a non-volatile memory).

[0055] An effect parameter or plurality thereof in the locally-stored haptic effect profile(s) may also be modifiable in some embodiments. For instance, an effect parameter(s) may be erasable and modifiable. One embodiment further comprises receiving the effect parameter(s) from a programmable bus. Another such method further comprises storing the effect parameter(s) in the locally-stored haptic effect profile(s).

[0056] The present invention may also be embodied in a device. One such device comprises an actuator, a non-

volatile memory configured to store a haptic effect profile, and a processor in communication with the non-volatile memory and the actuator. The non-volatile memory may comprise one or more haptic effect profiles in one embodiment. In such an embodiment, a stored haptic effect profile may comprise one or more effect parameters. The actuator may comprise a plurality of actuators, and the processor may be in communication with the plurality of actuators.

[0057] The processor may be configured to receive a sensor signal indicating a movement of a manipulandum. In one embodiment, a device according to the present invention may further comprise a sensor in communication with the processor and one or both of the manipulandum and the actuator. The sensor in such an embodiment may be configured to generate the sensor signal received by the processor. The processor may further be configured to identify at least one effect parameter associated with the sensor signal in the haptic effect profile. The processor may also be configured to generate an output signal based, at least in part, on the identified effect parameter. The processor-generated output signal may be configured to cause the actuator to provide a haptic effect associated with the effect parameter. For example, in one embodiment, the haptic effect may be provided to the manipulandum the sensor signal indicated a movement of.

[0058] A device according to the present invention may further comprise a power supply in communication with the processor. The power supply may be in communication with the actuator, and configured to supply power required to generate the output signal. In one embodiment comprising a power supply, the power supply may comprise a power storage device, such as a battery.

[0059] The haptic effect profile may comprise a selectable plurality of haptic effect profiles, each comprising one or more effect parameters. A device according to the present invention may further comprise a selector configured to allow selection of at least one desired haptic effect profile from the selectable plurality of haptic effect profiles in the non-volatile memory. In one such embodiment, the selector may be configured to allow a permanent selection of at least one haptic effect profile from the selectable plurality of haptic effect profiles. The selector may comprise, for example, a switch, a jumper, or any other suitable means for selecting at least one haptic effect profile from the selectable plurality of haptic effect profiles in the non-volatile memory.

[0060] For example, in one embodiment, a device according to the present invention may comprise a bi-polar switch in communication with the processor. In one such embodiment, the bi-polar switch may be configured, for example, to allow a manufacturer, installer, or user to select between two haptic effect profiles in the non-volatile memory based on the intended use of the device and/or on a user preference. In another embodiment, the selector may comprise a piece of solder that has been soldered between two electrical contact points on a circuit board such that a haptic effect profile has been selected from the selectable plurality thereof in the non-volatile memory.

[0061] The non-volatile memory may comprise, in one embodiment, an EEPROM. In one embodiment, the non-volatile memory may be configured to download the haptic effect profile(s). In such an embodiment, the haptic effect profile(s) may comprise a downloaded haptic effect pro-

file(s). In one such embodiment, the downloaded haptic effect profile(s) may be configured to be downloaded from a programmable bus to the non-volatile memory. Similarly, an embodiment may comprise a downloaded effect parameter or plurality thereof in the haptic effect profile(s). For instance, a downloaded effect parameter may be configured to be downloaded from a programmable bus to a locally-stored haptic effect profile.

[0062] One device according to the present invention may further comprise a modifiable haptic effect profile or selectable plurality thereof. For example, in one embodiment, an effect parameter or parameters in a haptic effect profile may be modifiable in order to permit the device to output a different haptic effect or effects. Another embodiment may comprise an erasable haptic effect profile. For example, in one embodiment, one or more effect parameters in a locally-stored haptic effect profile may be erasable or modifiable.

[0063] The present invention may alternatively be embodied in a computer-readable medium on which is encoded program code. The program code in such an embodiment may comprise program code for receiving a sensor signal from a sensor in communication with a manipulandum. For example, the sensor signal may comprise an indication of a movement of the manipulandum. The computer-readable medium may further comprise program code for identifying at least one effect parameter associated with the sensor signal in a locally-stored haptic effect profile, and program code for generating an output signal based, at least in part, on the effect parameter. The output signal may be configured to cause an actuator to output a haptic effect associated with the effect parameter. For example, in one embodiment, the haptic effect may be output to the manipulandum that the sensor signal indicated a movement of. In another embodiment, the haptic effect may be output to another element of a device, such as a housing.

[0064] One such computer-readable medium embodiment may further comprise program code for selecting the haptic effect profile from a selectable plurality of haptic effect profiles contained in a non-volatile memory. A computer-readable medium embodiment may further comprise program code for a multitude of different functions. For instance, an embodiment may comprise program code for modifying the locally-stored haptic effect profile. Another embodiment may comprise program code for erasing the locally-stored haptic effect profile.

[0065] The locally-stored haptic effect profile may be downloaded. One such embodiment may further comprise program code for receiving the locally-stored haptic effect profile from a programmable bus. Another such embodiment may further comprise program code for storing the locally-stored haptic effect profile in a memory, such as the non-volatile memory. Similarly, the one or more effect parameters in the locally-stored haptic effect profile may be downloaded. In one such embodiment, the computer-readable medium may comprise program code for receiving an effect parameter from a programmable bus. Another such embodiment may comprise program code for storing an effect parameter in the locally-stored haptic effect profile. Another embodiment may comprise program code for determining a state.

[0066] Referring again to the Figures, FIG. 4 is a flow-chart illustrating a method for providing haptic effects

according to one embodiment of the present invention. The method shown in illustrated in FIG. 4 is described with reference to HVAC control-panel (100) shown in FIG. 1. A user of the HVAC control-panel (100) may be in the process of changing the escape location of warmed or cooled forced air into an automobile comprising the HVAC control-panel (100) utilizing an embodiment of the present invention. The HVAC control-panel (100) may include a location control knob (112). For example, the location control knob (112) may be the manipulandum of FIG. 2. The user of the HVAC control-panel (100) may determine that the automobile cabin temperature near a floor of the automobile is too cool. The user may then utilize an interface device, such as the location control knob (112), to change the output location of forced warmed air to a location setting (128) that will permit the forced air to escape near the floor of the automobile. For instance, the user may turn the location control knob (112) to the "FEET" location setting (128).

[0067] As shown in box 405 of FIG. 4, when the user turns the location control knob (112) manipulandum, a processor may receive a sensor signal from a sensor in communication with the location control knob (112) manipulandum. As shown in box 410, in the embodiment shown, the processor may determine a state. For instance, the processor may determine whether the location control knob (112) is beginning its rotational movement from a position corresponding to a location setting (128), or from a position not corresponding to a location setting (128). As shown in box 415, the processor may then identify at least one effect parameter associated with the sensor signal in a locally-stored haptic effect profile. The identified effect parameter or parameters, as in the embodiment shown, may further be associated with the state determination made by the processor.

[0068] The processor may be in communication with an actuator. As shown in box 420, the processor may generate an output signal based, at least in part, on the identified effect parameter. The output signal may be configured to cause the actuator in communication with the control knob (112) manipulandum to output a haptic effect associated with the effect parameter on the control knob (112). For instance, the actuator may comprise a DC motor in direct communication with the location control knob (112). In such an embodiment, the output signal may comprise an electrical current. The electrical current may be configured to cause the DC motor actuator in communication with the location control knob (112) to create a detent haptic effect associated with the identified effect parameter between the location settings (128). The detent effect may be caused by a DC motor actuator creating a resistance on the location control knob (112) over a short interval of time in response to receiving the electrical current. The user can overcome the detent haptic effect by continuing to turn the location control knob (112) to a desired location setting (128). The detent haptic effect may provide an indication to the user that he or she is between location settings (128), and that the location control knob (112) must be turned further to select a location setting (128).

[0069] The method shown in FIG. 4 may also be used to provide a stop effect to the user. If the user attempts to turn the location control knob (112) too far, for instance, clockwise past the "DEFROST" location setting (128), the processor device may receive a sensor signal from the sensor in

communication with the location control knob (112) and determine that the user has inadvertently attempted to turn the location control knob (112) the wrong way. The processor may then identify in the locally-stored haptic effect profile one or more effect parameters associated with the sensor signal that indicates a state where the user has attempted to turn the control knob (112) the wrong way.

[0070] The processor may then generate an output signal based, at least in part, on the identified effect parameters. For example, the processor may generate an output signal comprising aspects of a plurality of identified effect parameters, such as a period and amplitude of a sine wave output signal, as well as the duration of the output signal. The output signal may be configured to cause the actuator to output a “stop” haptic effect associated with the identified effect parameters on the control knob (112). The generated output signal may then be transmitted to the actuator, causing a strong resistance to the further rotation of the location control knob (112) in the wrong direction that may not be overcome. Various other types of effects may be utilized. For example, in one embodiment, the actuator may provide a “bump” haptic effect when the location control knob (112) is rotated to a location setting (128).

[0071] Embodiments of the present invention may be incorporated into a broad array of devices. For example, an instrument control interface in an automobile may utilize rotary control knobs comprising DC motor haptic actuators according to the present invention. A television remote control may also incorporate an embodiment of the present invention for channel navigation, volume control, and other related functions. Similarly, an audio component remote control may utilize an embodiment for volume control or other audio control. A laptop computer may utilize an embodiment for navigation, volume control, or any other function utilizing a control knob, scroll wheel, scroll drum, linear slider, or similar user interface device. Home or automobile HVAC control-panels, handheld navigation devices, and handheld email appliances may also benefit from utilizing an embodiment of the present invention.

[0072] The foregoing description of the embodiments of the invention has been presented only for the purpose of illustration and description and is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Numerous modifications and adaptations thereof will be apparent to those skilled in the art without departing from the spirit and scope of the present invention.

That which is claimed:

1. A device comprising:

an actuator;

a non-volatile memory configured to store a haptic effect profile; and

a processor in communication with the actuator and the non-volatile memory, the processor configured to:

receive a sensor signal indicating a movement of a manipulandum;

identify an effect parameter associated with the sensor signal in the haptic effect profile; and

generate an output signal based, at least in part, on the effect parameter, the output signal configured to cause the actuator to output a haptic effect associated with the effect parameter.

2. The device of claim 1, wherein the haptic effect profile comprises a selectable plurality of haptic effect profiles.

3. The device of claim 2, further comprising a selector configured to allow selection of at least one haptic effect profile from the selectable plurality of haptic effect profiles.

4. The device of claim 3, wherein the selector is configured to allow permanent selection of the at least one haptic effect profile.

5. The device of claim 1, further comprising a sensor in communication with the manipulandum and the processor, wherein the sensor is configured to generate the sensor signal.

6. The device of claim 1, wherein the actuator comprises a plurality of actuators.

7. The device of claim 1, wherein the non-volatile memory is configured to download the haptic effect profile.

8. The device of claim 1, further comprising a downloaded haptic effect profile.

9. The device of claim 8, wherein the downloaded haptic effect profile is configured to be downloaded from a programmable bus.

10. The device of claim 8, wherein the downloaded haptic effect profile is configured to be downloaded to the non-volatile memory.

11. A method comprising:

providing an actuator;

providing a non-volatile memory configured to store a haptic effect profile; and

providing a processor in communication with the actuator and the non-volatile memory, the processor configured to:

receive a sensor signal indicating a movement of a manipulandum;

identify an effect parameter associated with the sensor signal in the haptic effect profile; and

generate an output signal based, at least in part, on the effect parameter, the output signal configured to cause the actuator to output a haptic effect associated with the effect parameter.

12. The method of claim 11, wherein the haptic effect profile comprises a selectable plurality of haptic effect profiles.

13. The method of claim 12, further comprising providing a selector configured to allow selection of at least one haptic effect profile from the selectable plurality of haptic effect profiles.

14. The method of claim 13, wherein the selector is configured to allow permanent selection of the at least one haptic effect profile.

15. The method of claim 11, further comprising providing a sensor in communication with the manipulandum and the processor, wherein the sensor is configured to generate the sensor signal.

16. A method comprising:

receiving a sensor signal indicating a movement of a manipulandum from a sensor in communication with the manipulandum;

identifying an effect parameter associated with the sensor signal in a locally-stored haptic effect profile; and

generating an output signal based, at least in part, on the effect parameter, the output signal configured to cause an actuator to output a haptic effect associated with the effect parameter.

17. The method of claim 16, wherein the locally-stored haptic effect profile comprises a selectable plurality of haptic effect profiles.

18. The method of claim 17, further comprising selecting at least one haptic effect profile from the selectable plurality of haptic effect profiles.

19. The method of claim 18, wherein selecting at least one haptic effect profile comprises permanently selecting the at least one haptic effect profile.

20. The method of claim 16, wherein the actuator comprises a plurality of actuators.

21. The method of claim 16, further comprising modifying the locally-stored haptic effect profile.

22. The method of claim 16, further comprising receiving the locally-stored haptic effect profile from a programmable bus.

23. The method of claim 16, further comprising storing the locally-stored haptic effect profile in a non-volatile memory.

24. A computer-readable medium on which is encoded program code, the program code comprising:

program code for receiving a sensor signal indicating a movement of a manipulandum from a sensor in communication with the manipulandum;

program code for identifying an effect parameter associated with the sensor signal in a locally-stored haptic effect profile; and

program code for generating an output signal based, at least in part, on the effect parameter, the output signal configured to cause an actuator to output a haptic effect associated with the effect parameter.

25. The computer-readable medium of claim 24, wherein the locally-stored haptic effect profile comprises a selectable plurality of haptic effect profiles.

26. The computer-readable medium of claim 25, further comprising program code for selecting at least one haptic effect profile from the selectable plurality of haptic effect profiles.

27. The computer-readable medium of claim 26, wherein the program code for selecting at least one haptic effect profile comprises program code for permanently selecting the at least one haptic effect profile.

28. The computer-readable medium of claim 24, further comprising program code for modifying the locally-stored haptic effect profile.

29. The computer-readable medium of claim 24, further comprising program code for receiving the locally-stored haptic effect profile from a programmable bus.

30. The computer-readable medium of claim 24, further comprising program code for storing the locally-stored haptic effect profile in a non-volatile memory.

* * * * *