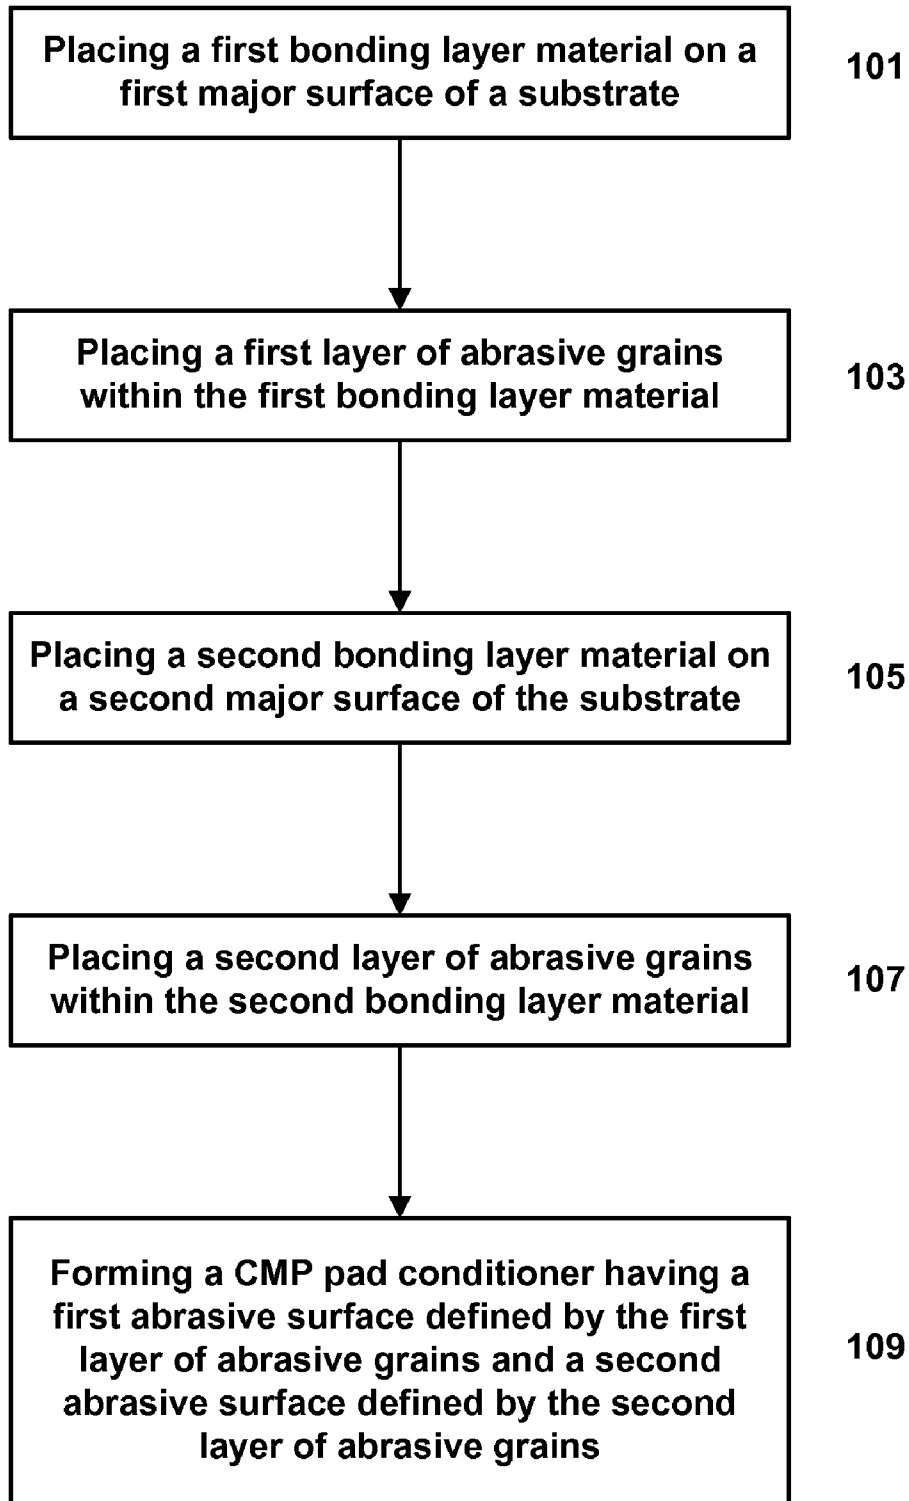


**FIG. 1**

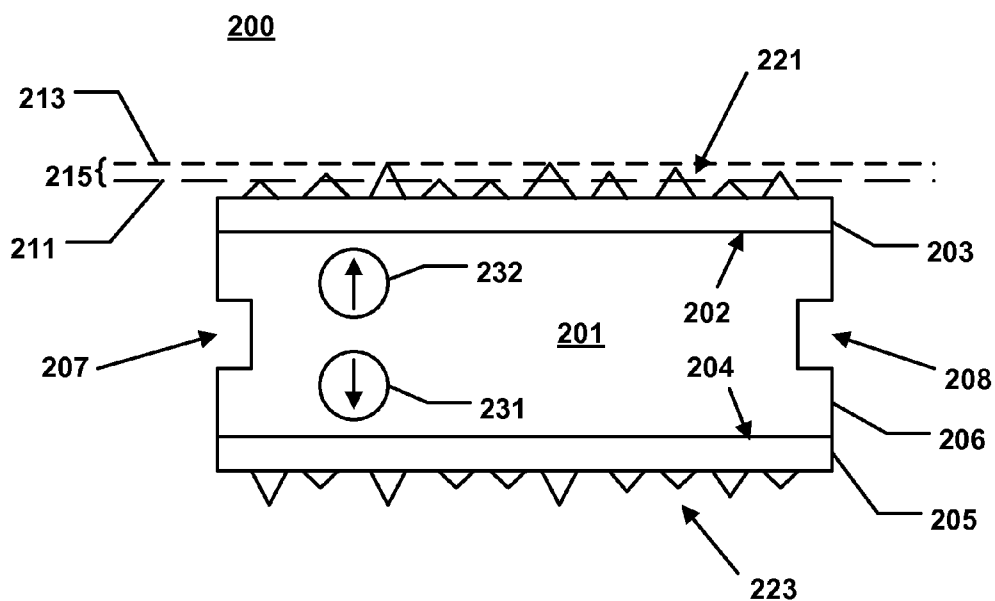


FIG. 2A

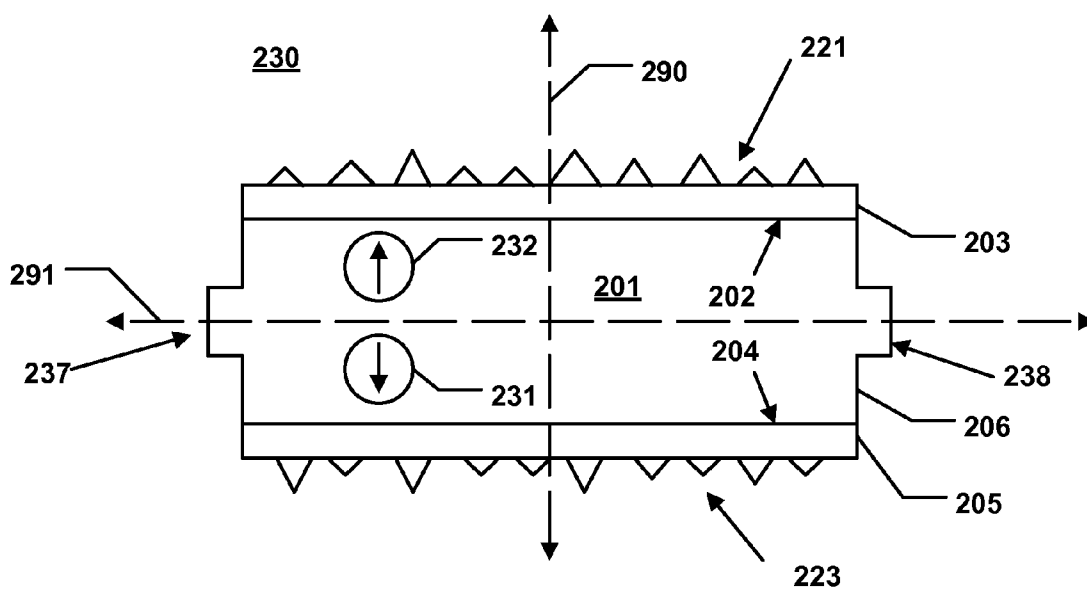


FIG. 2B

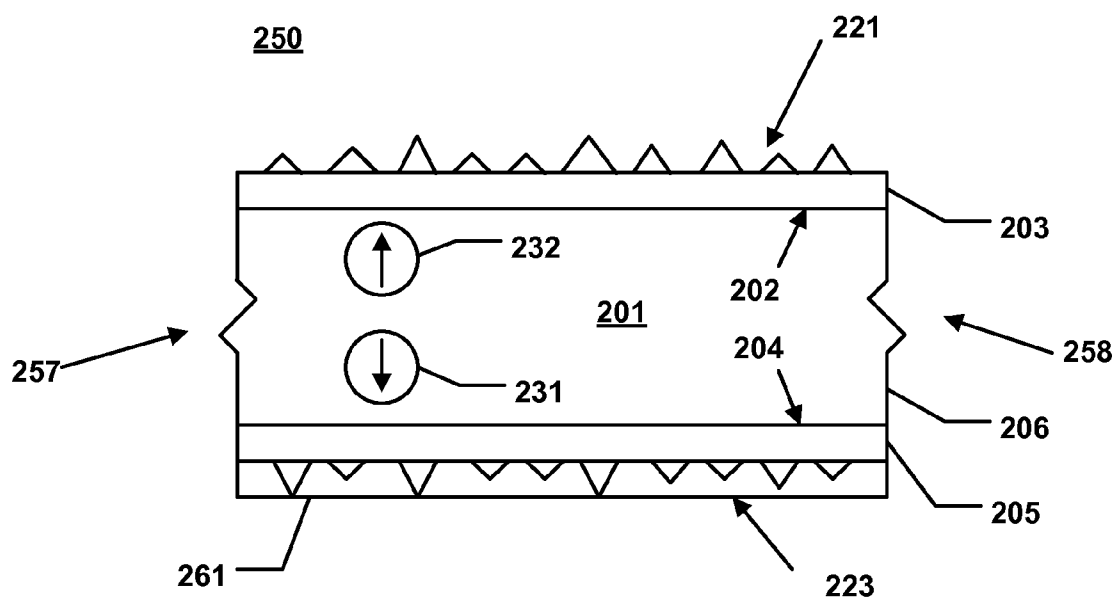


FIG. 2C

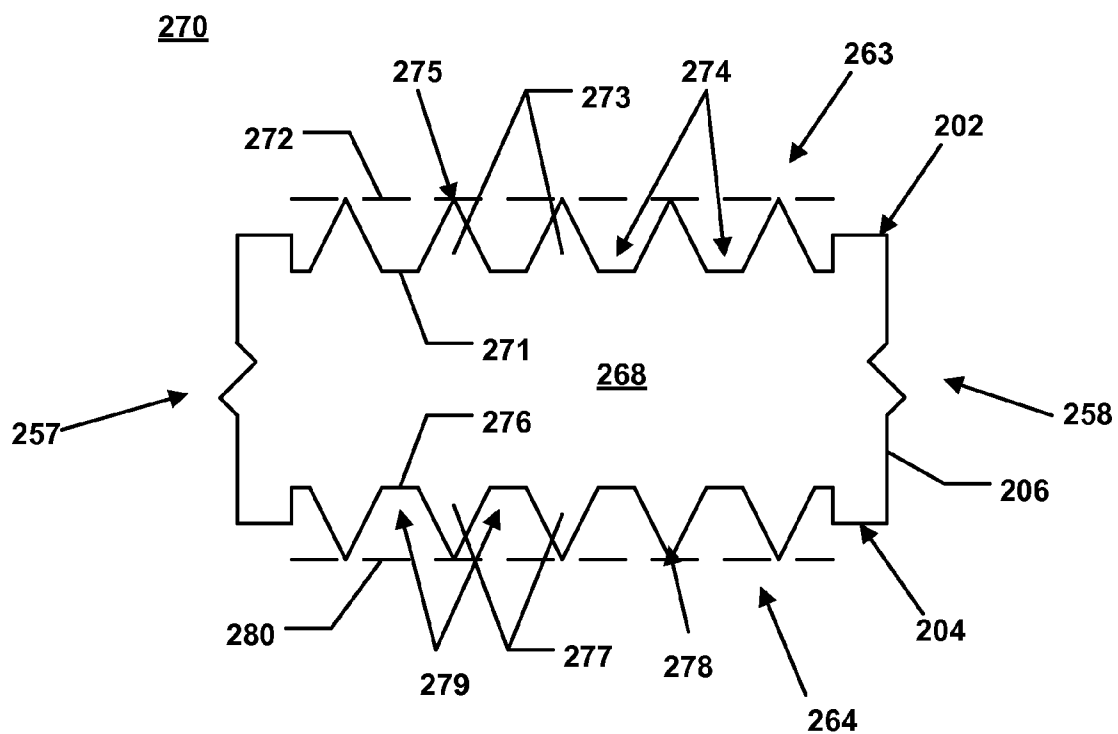
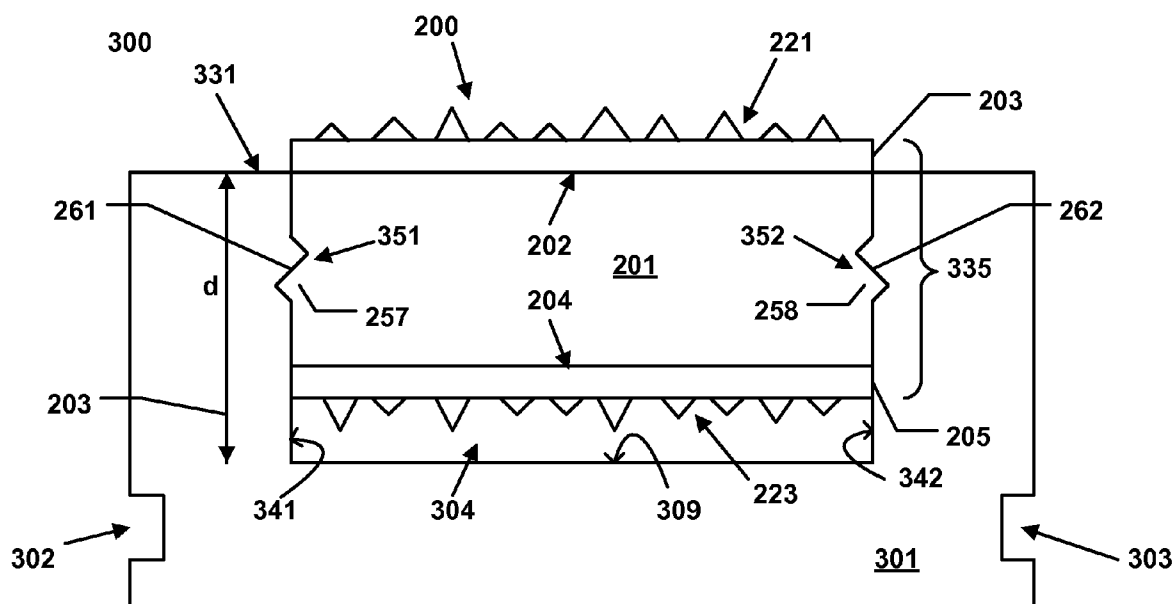
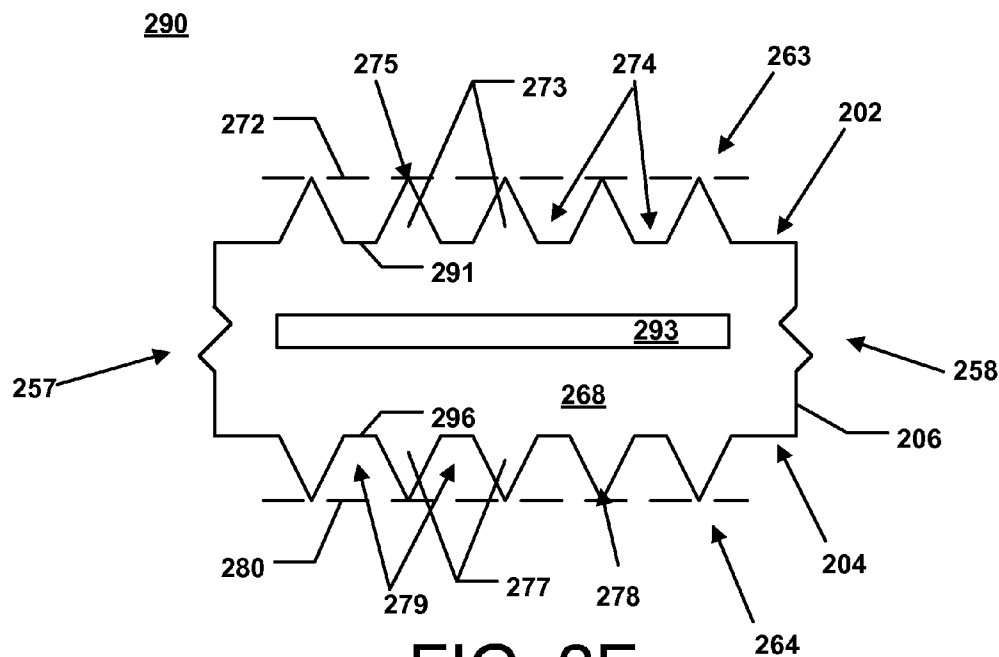


FIG. 2D



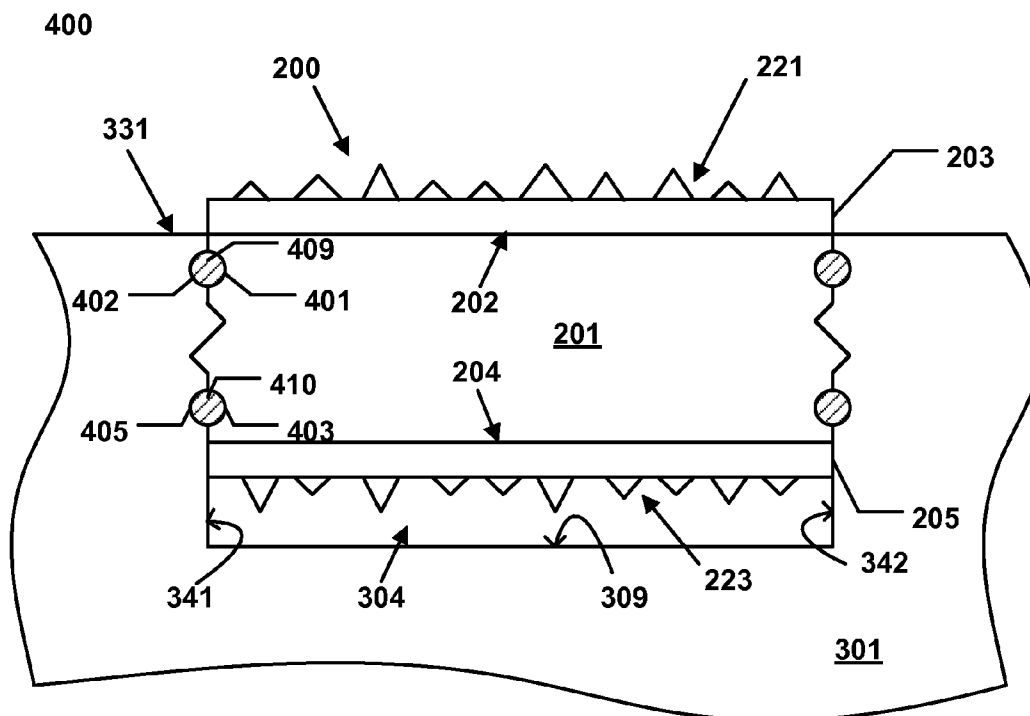


FIG. 4

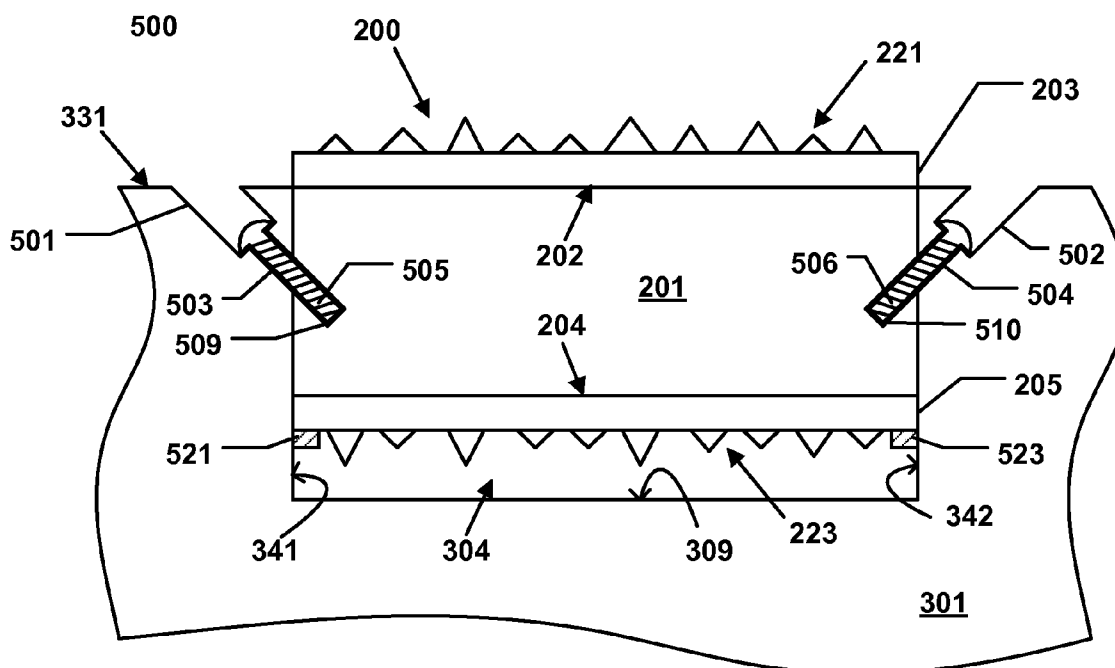


FIG. 5

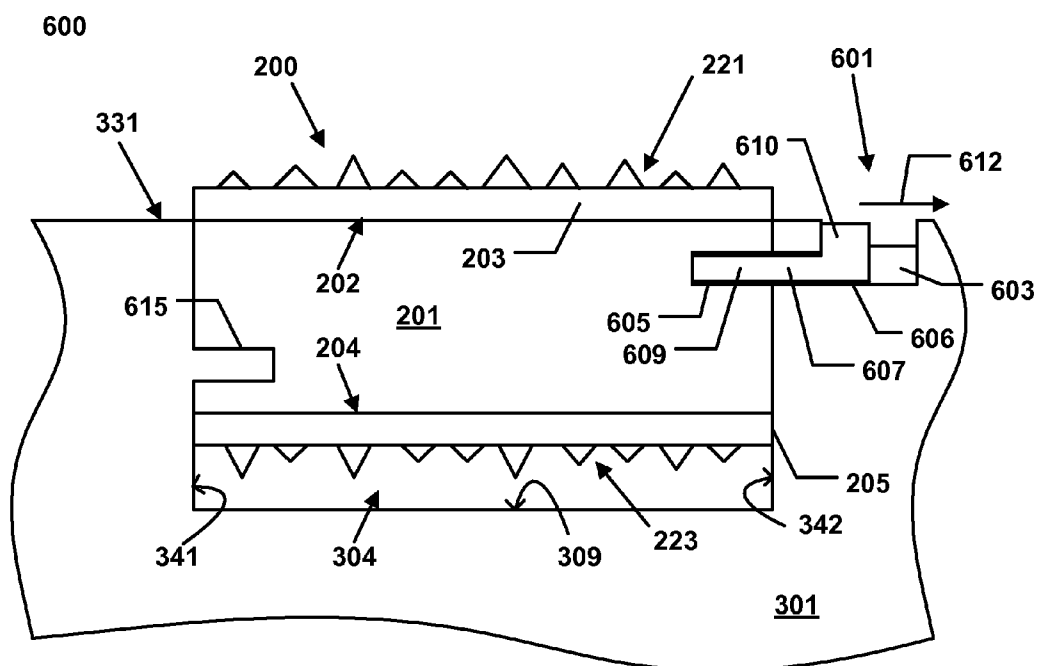


FIG. 6

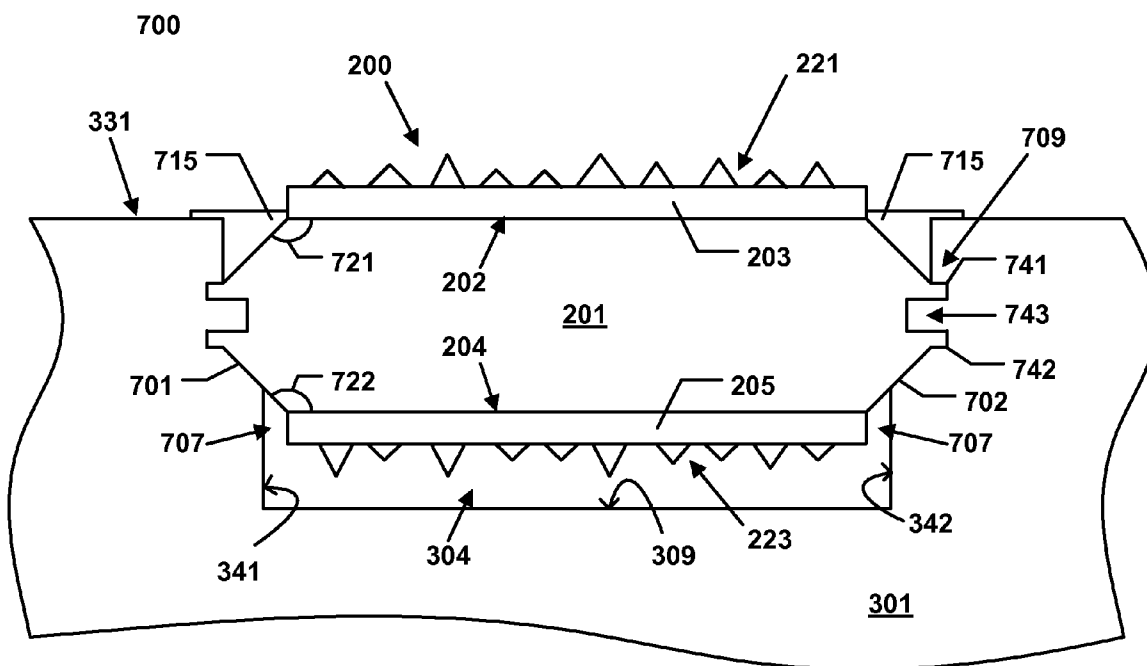


FIG. 7

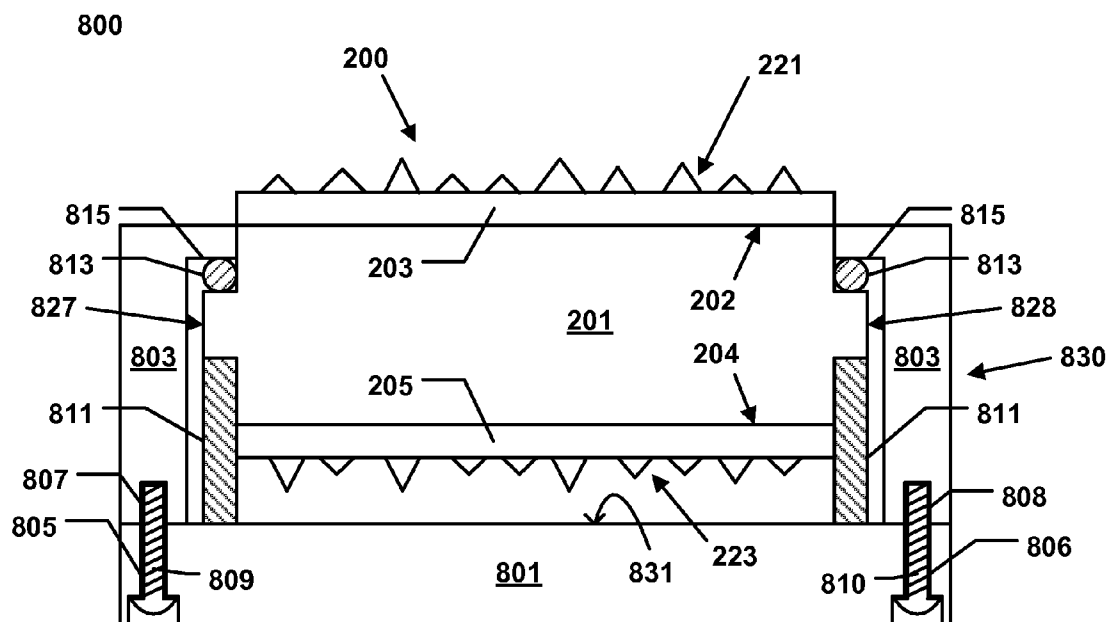


FIG. 8

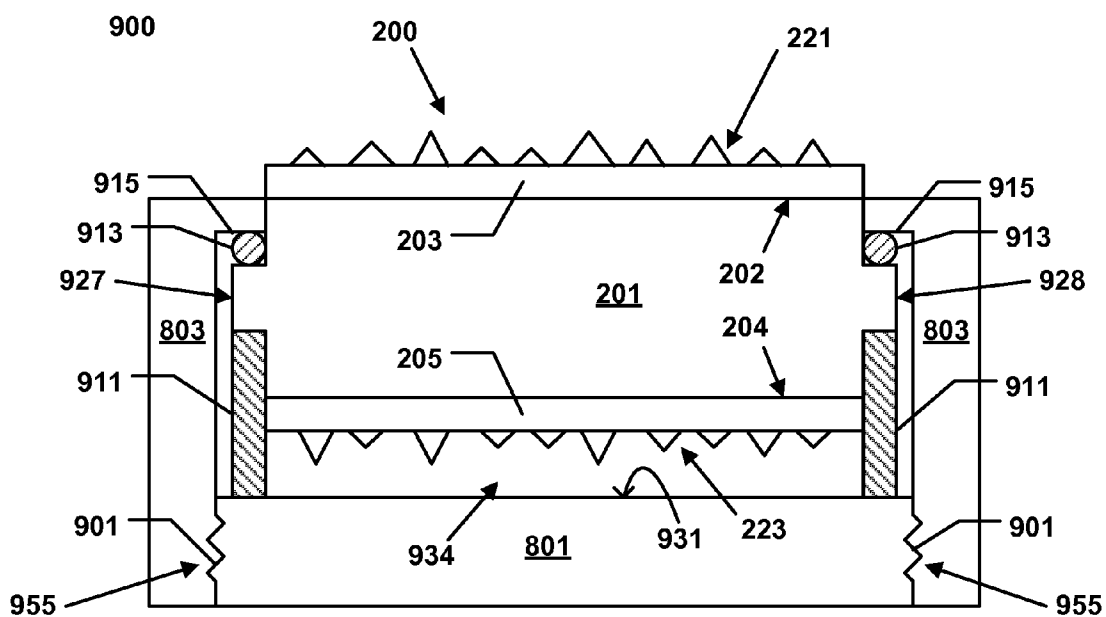


FIG. 9

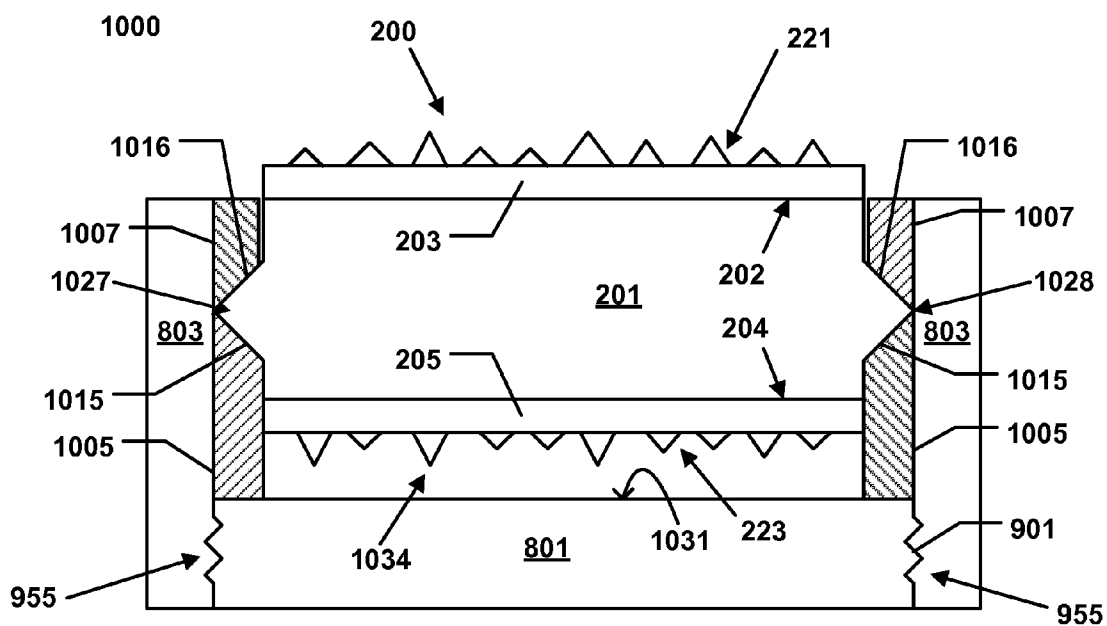


FIG. 10

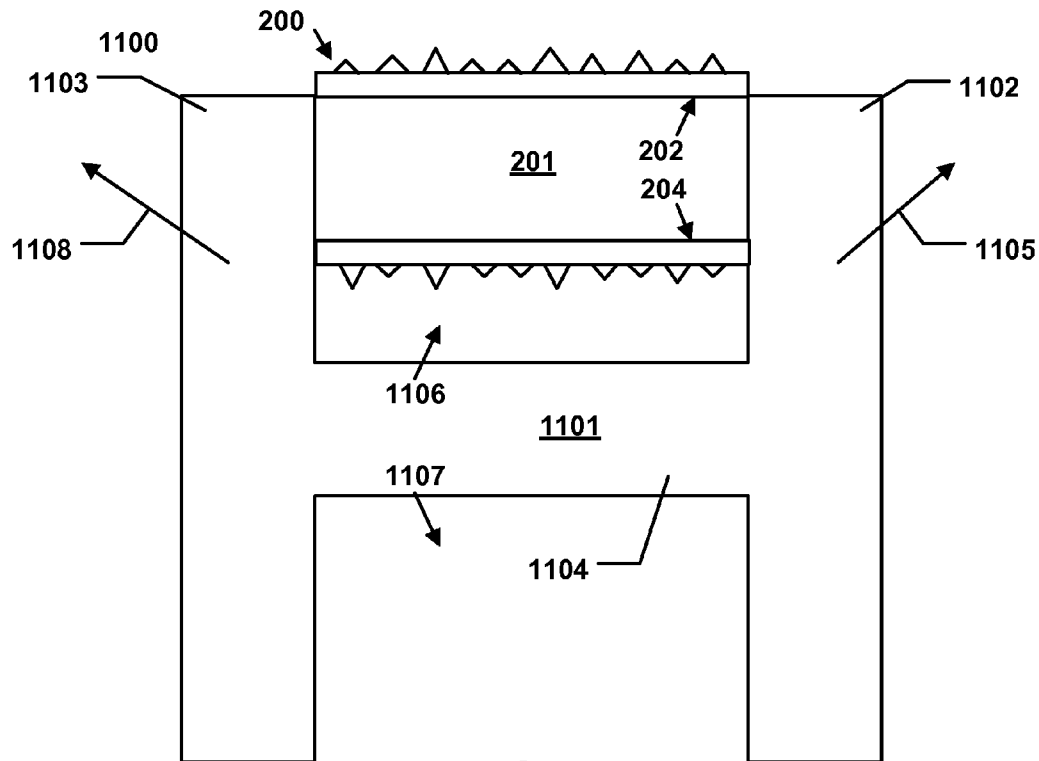


FIG. 11

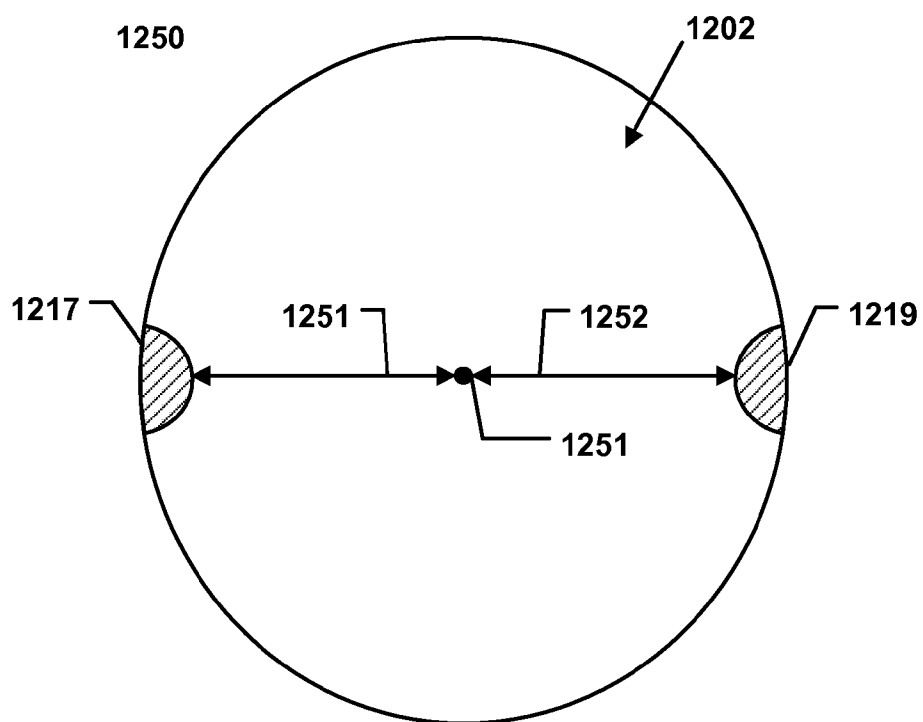


FIG. 12C

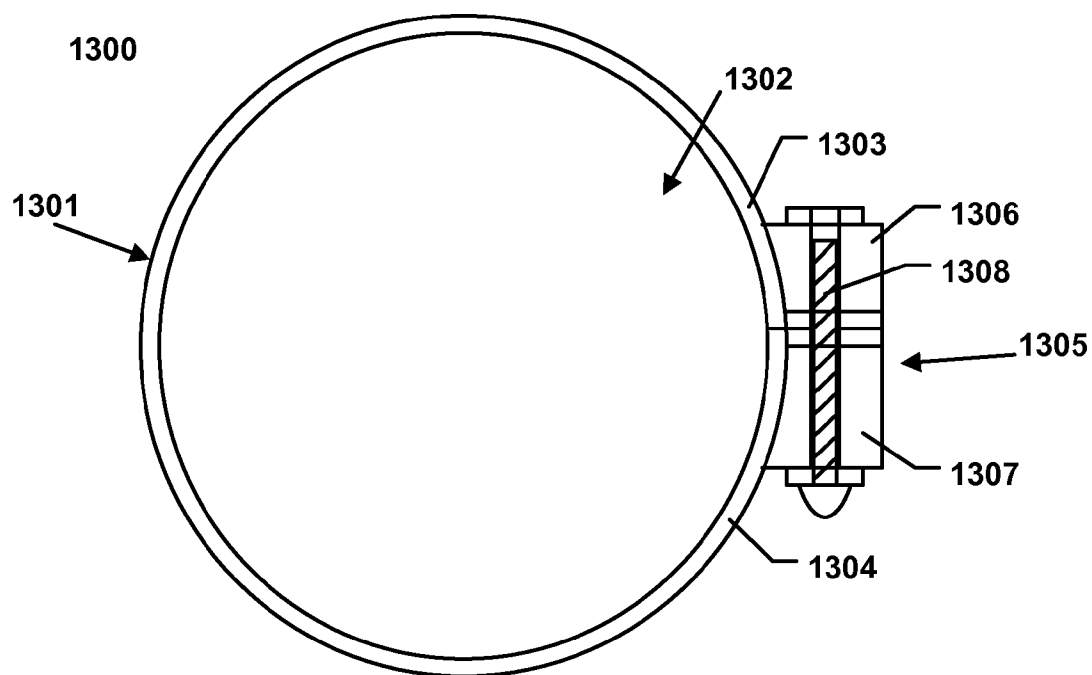


FIG. 13

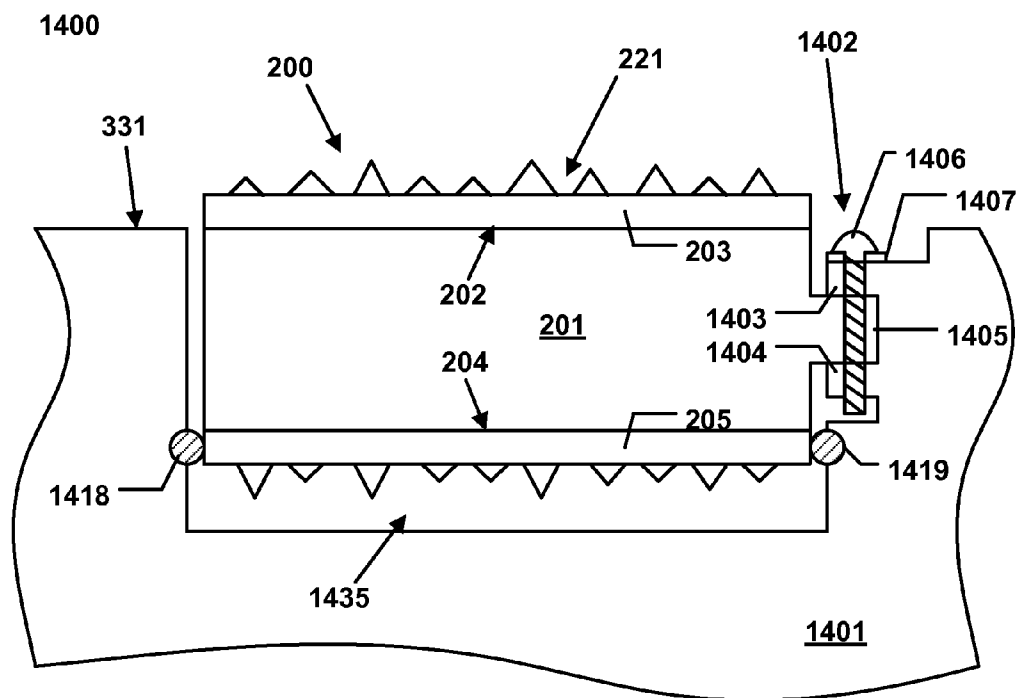


FIG. 14

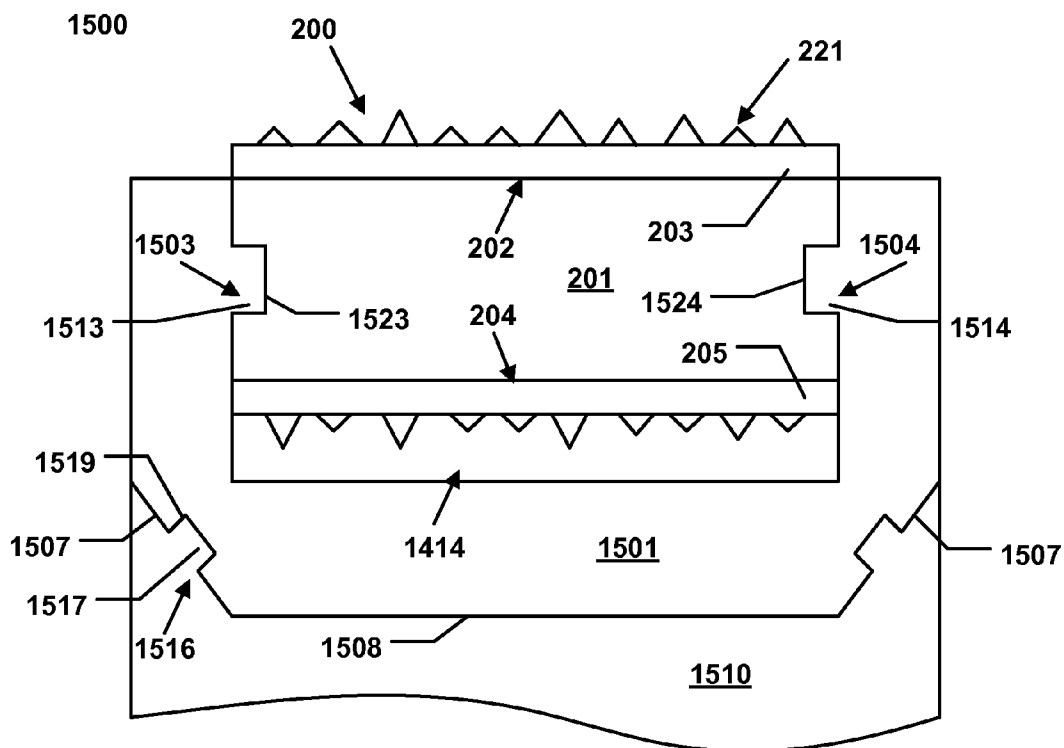


FIG. 15

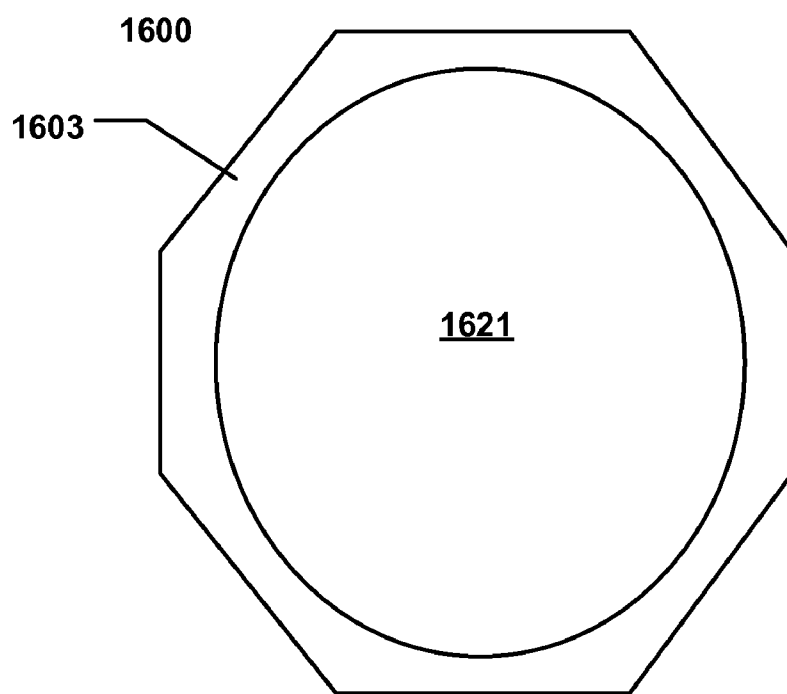


FIG. 16

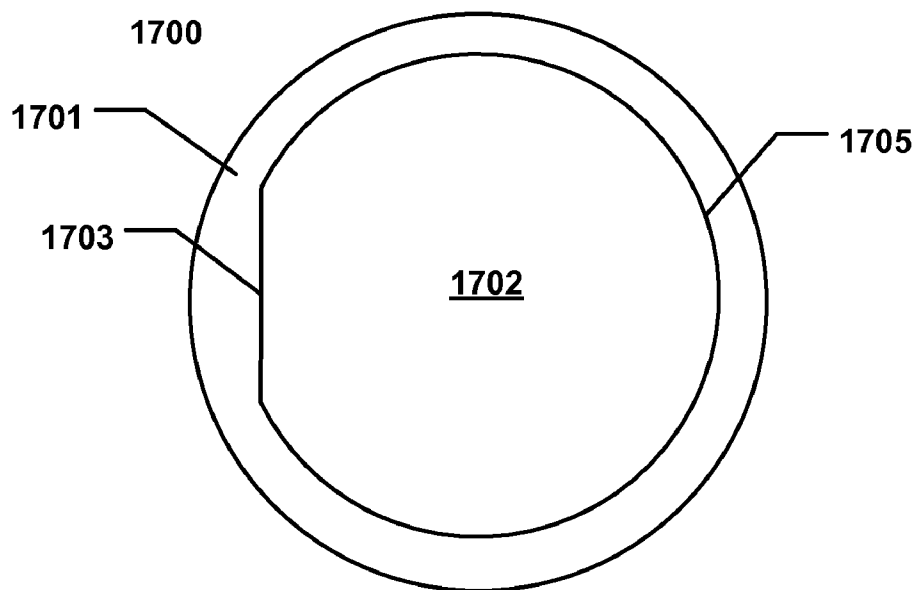
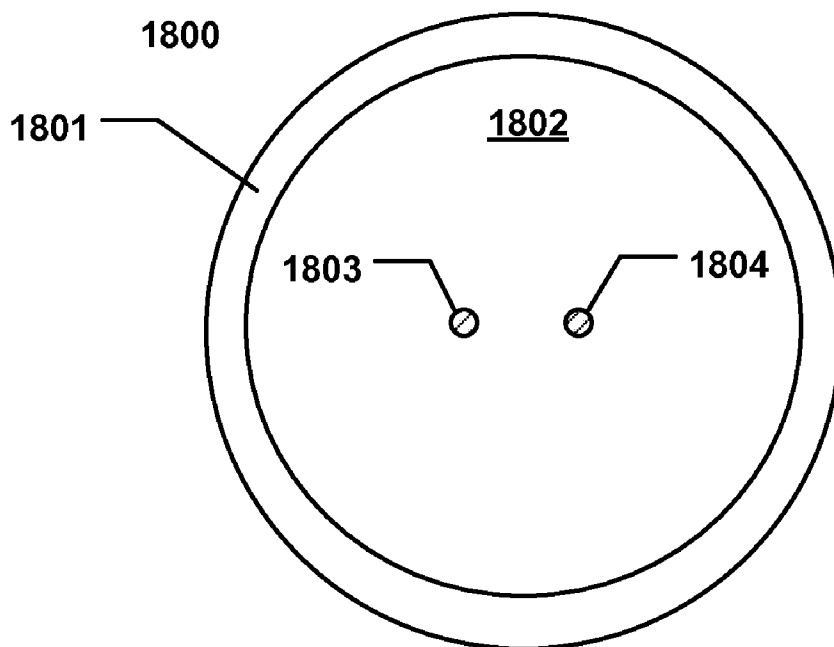
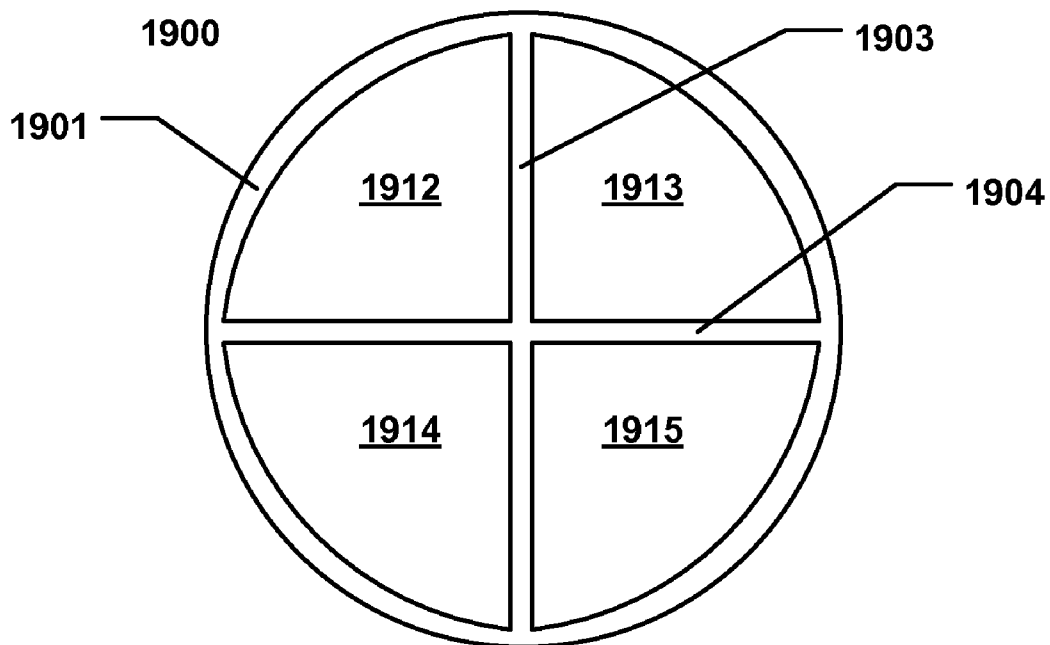


FIG. 17

**FIG. 18****FIG. 19**

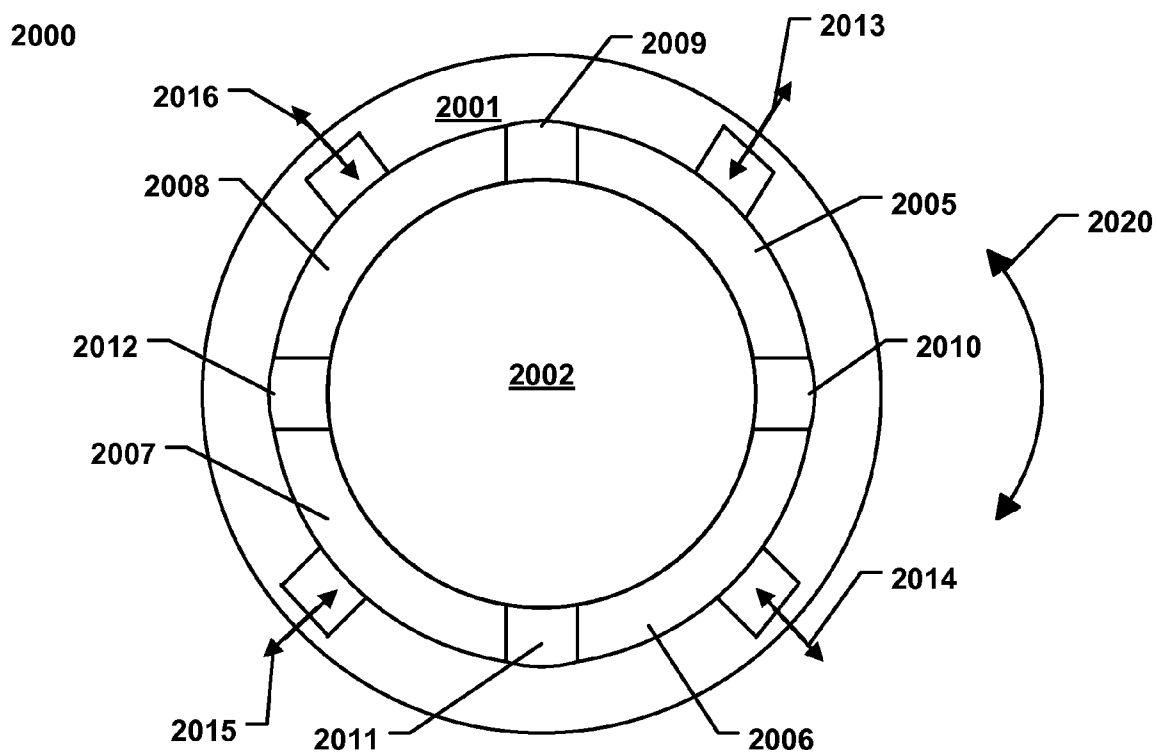


FIG. 20

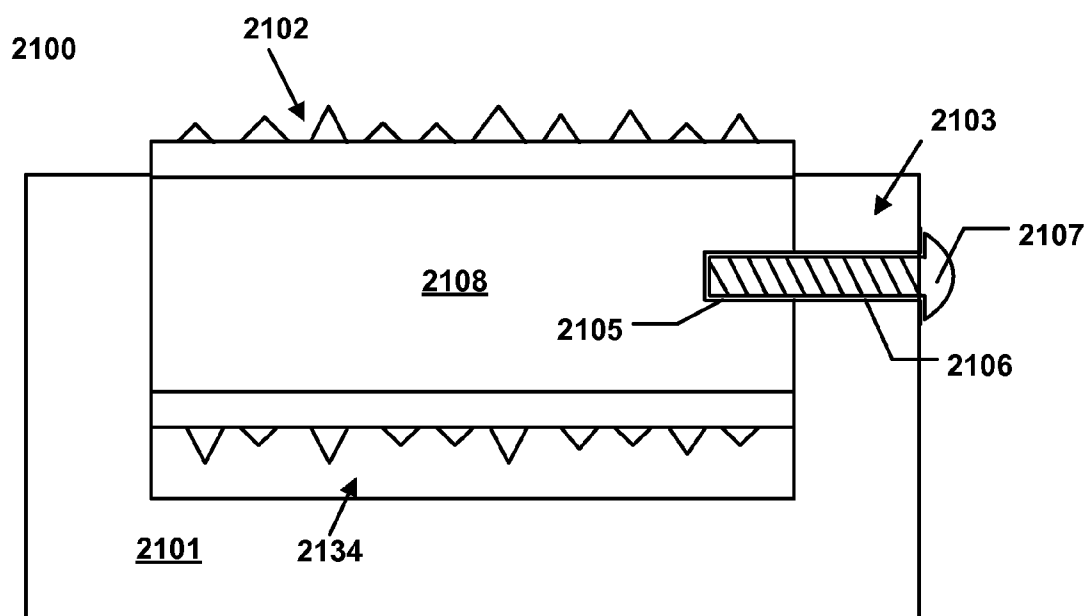


FIG. 21

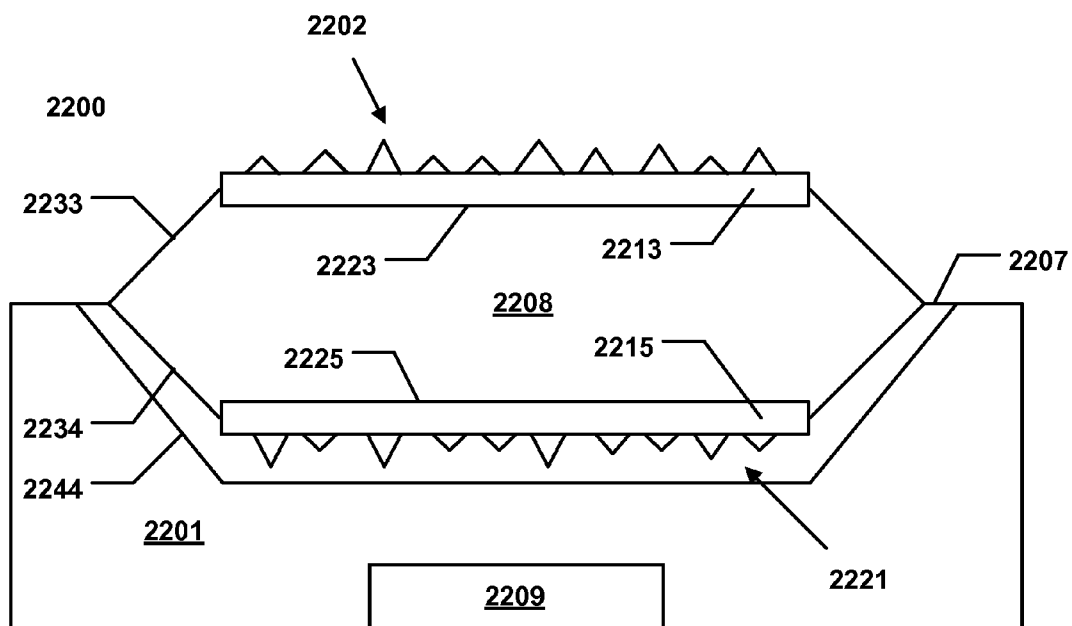


FIG. 22

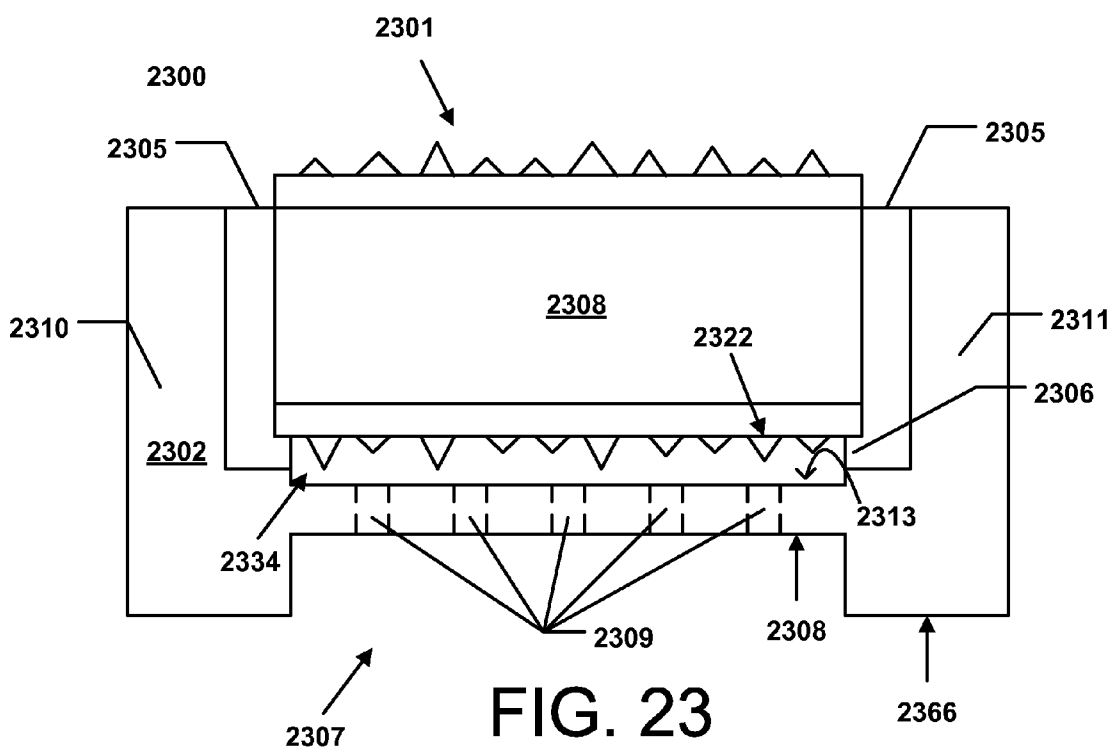
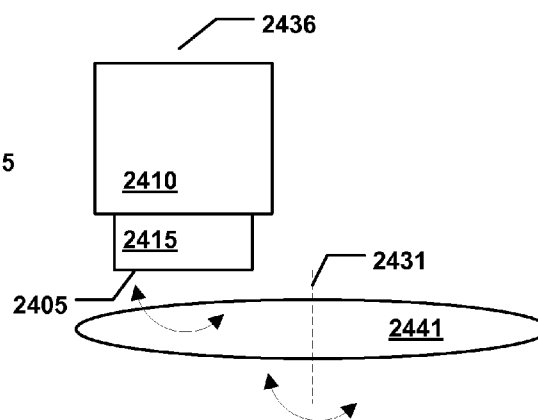
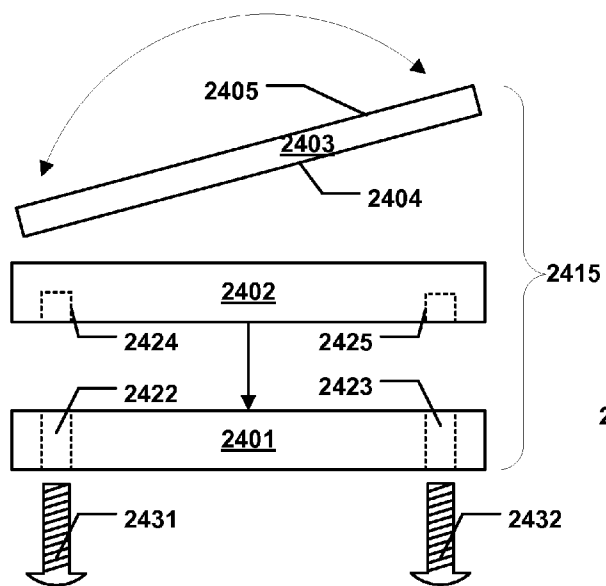
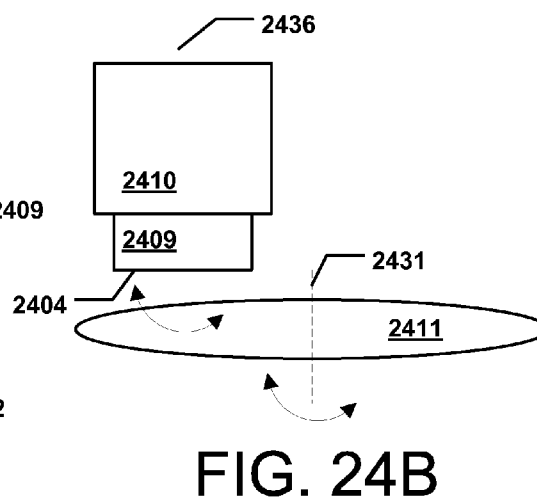
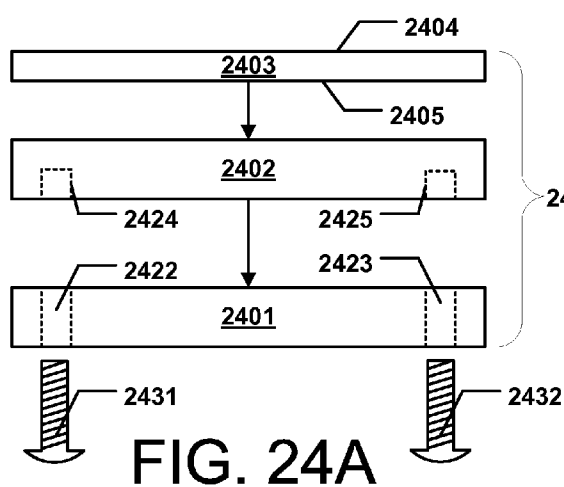


FIG. 23



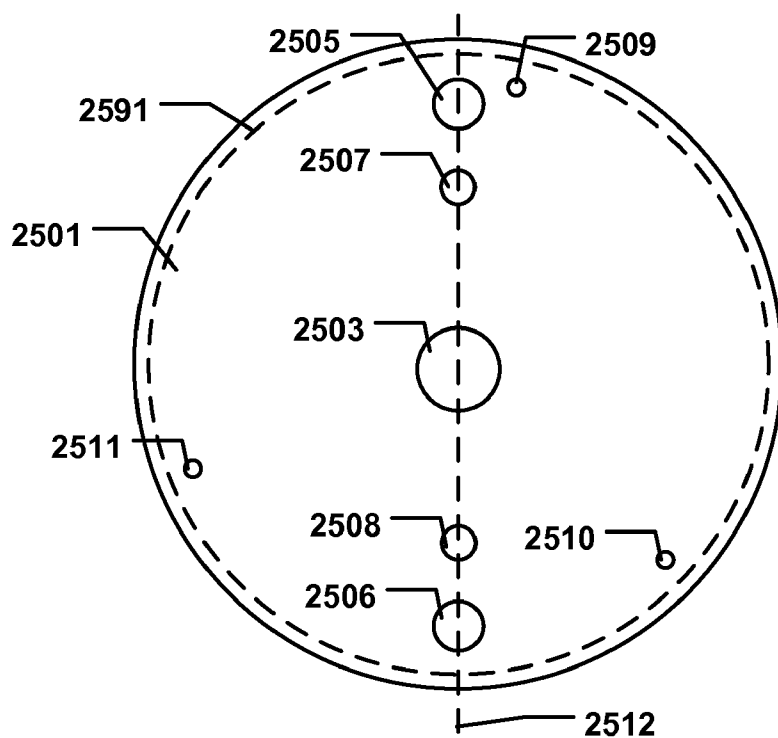


FIG. 25A

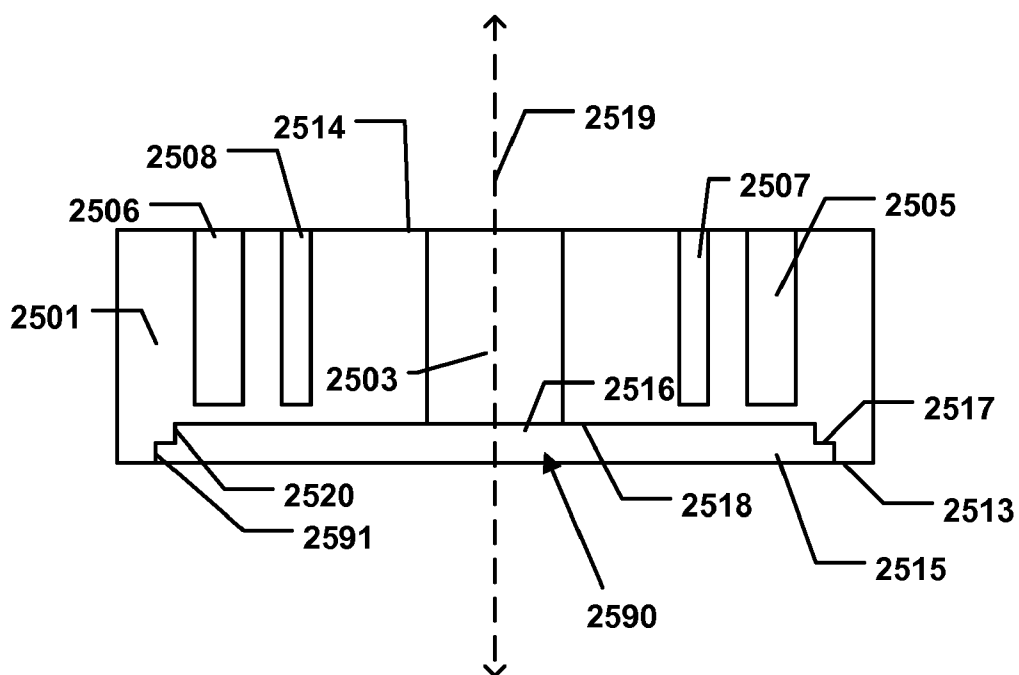


FIG. 25B

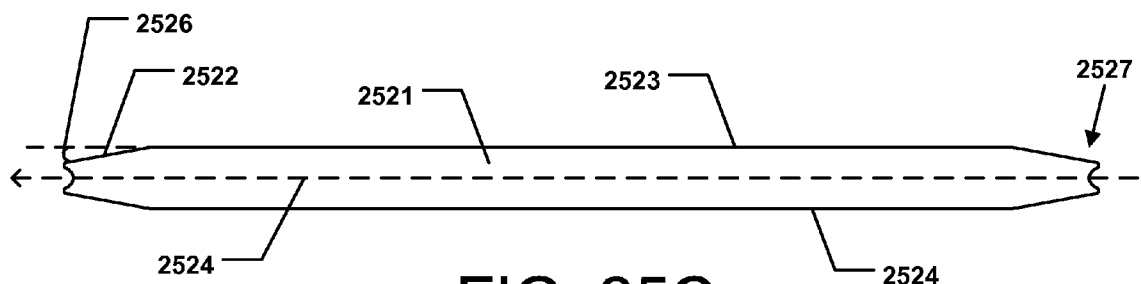


FIG. 25C

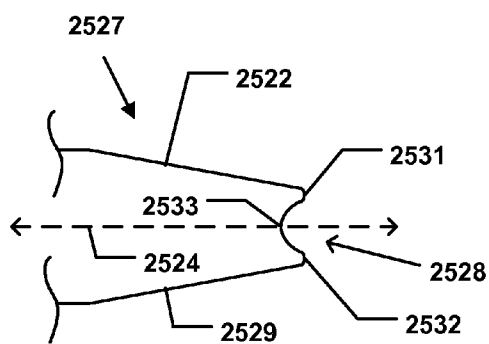


FIG. 25D

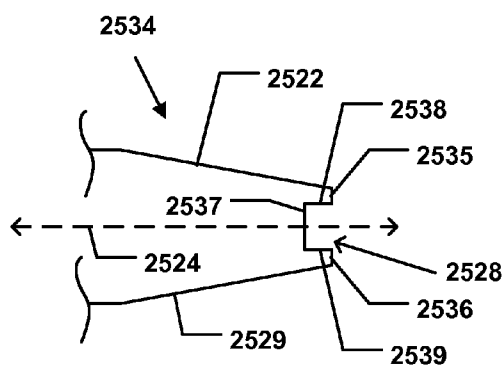


FIG. 25E

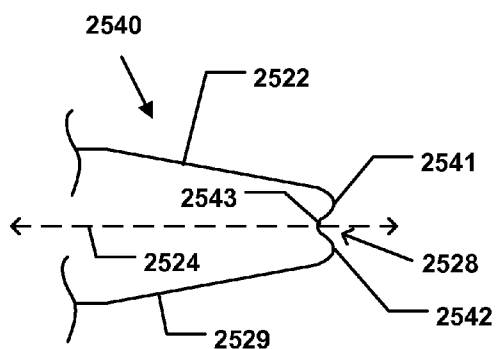


FIG. 25F

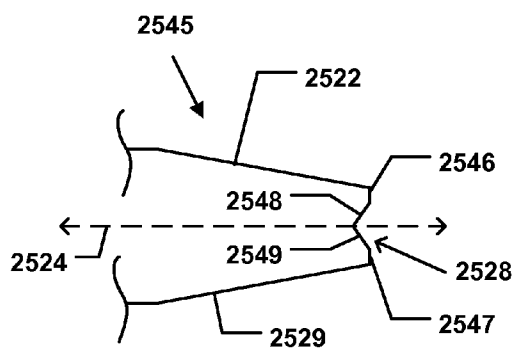


FIG. 25G

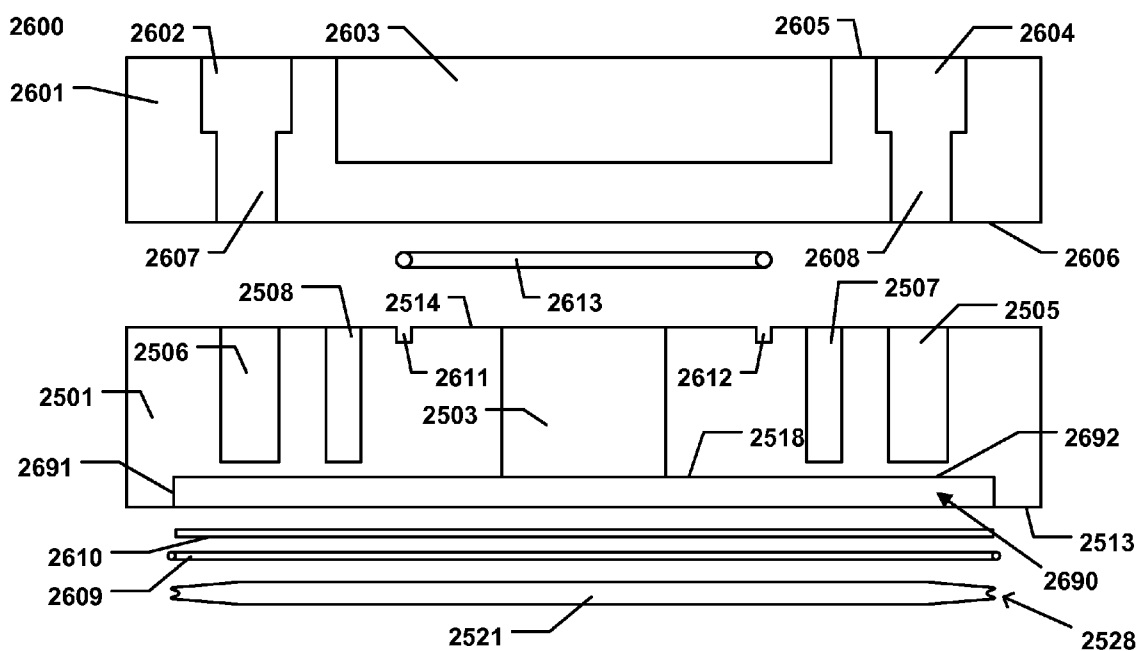


FIG. 26A

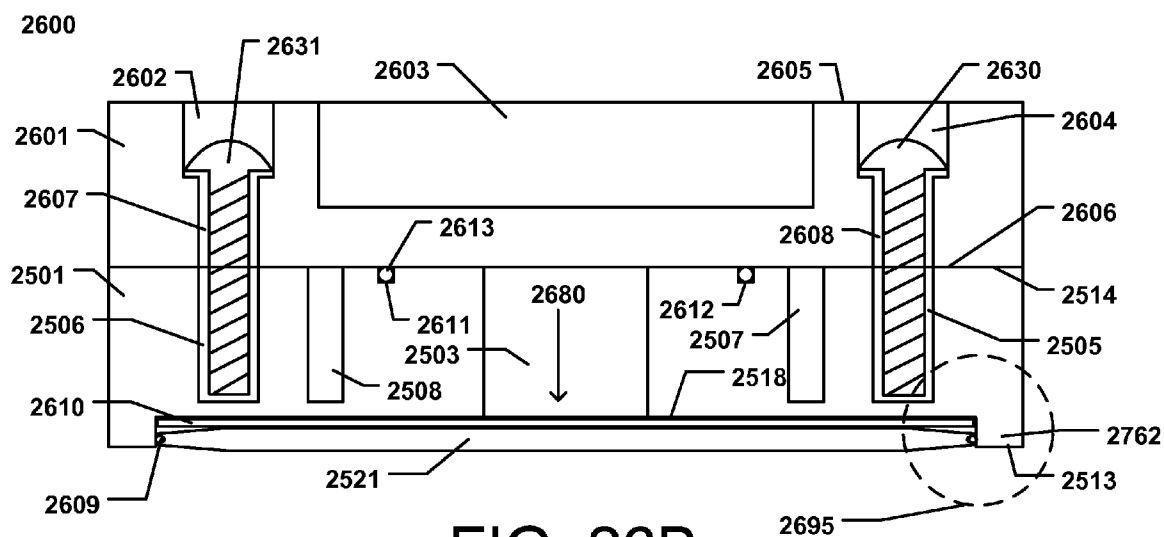


FIG. 26B

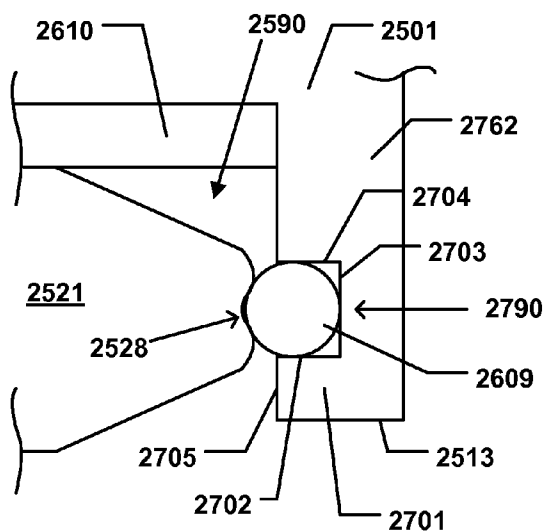


FIG. 27A

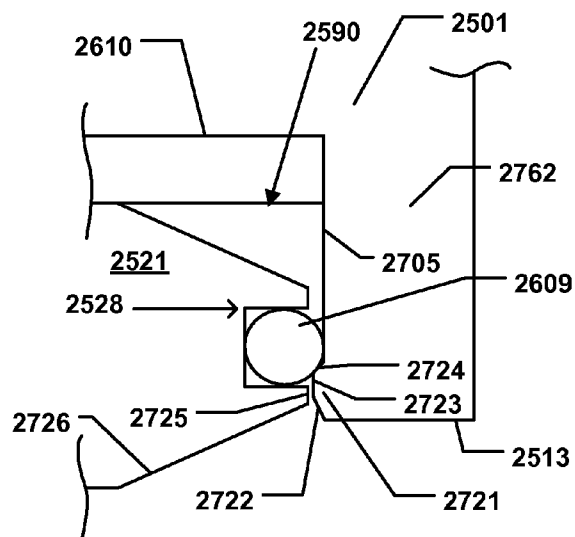


FIG. 27B

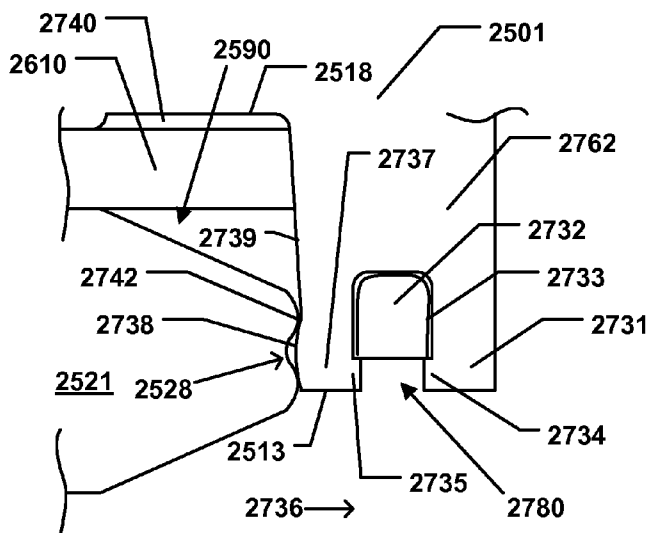


FIG. 27C

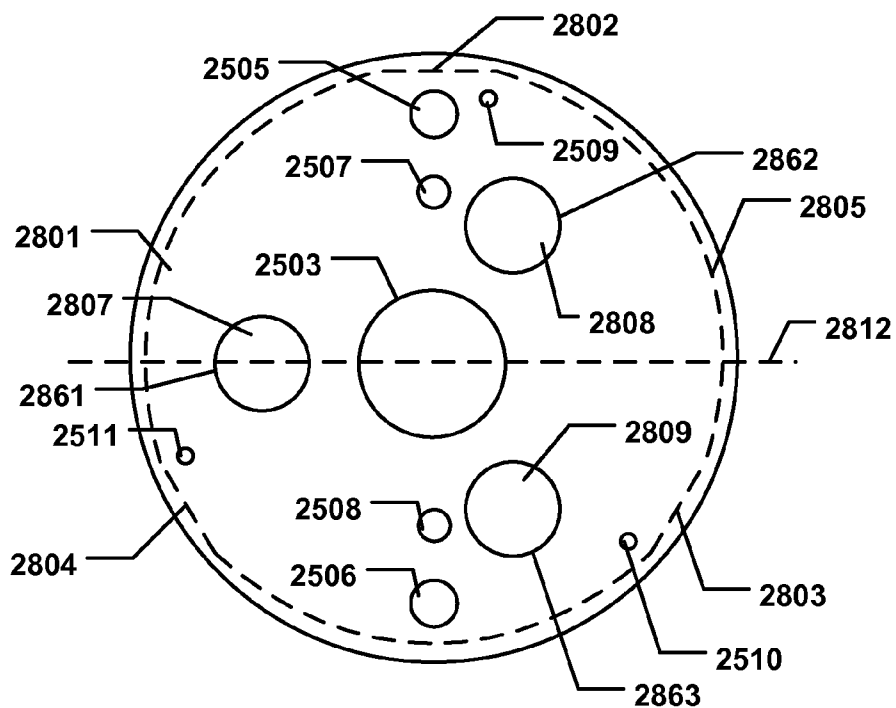


FIG. 28A

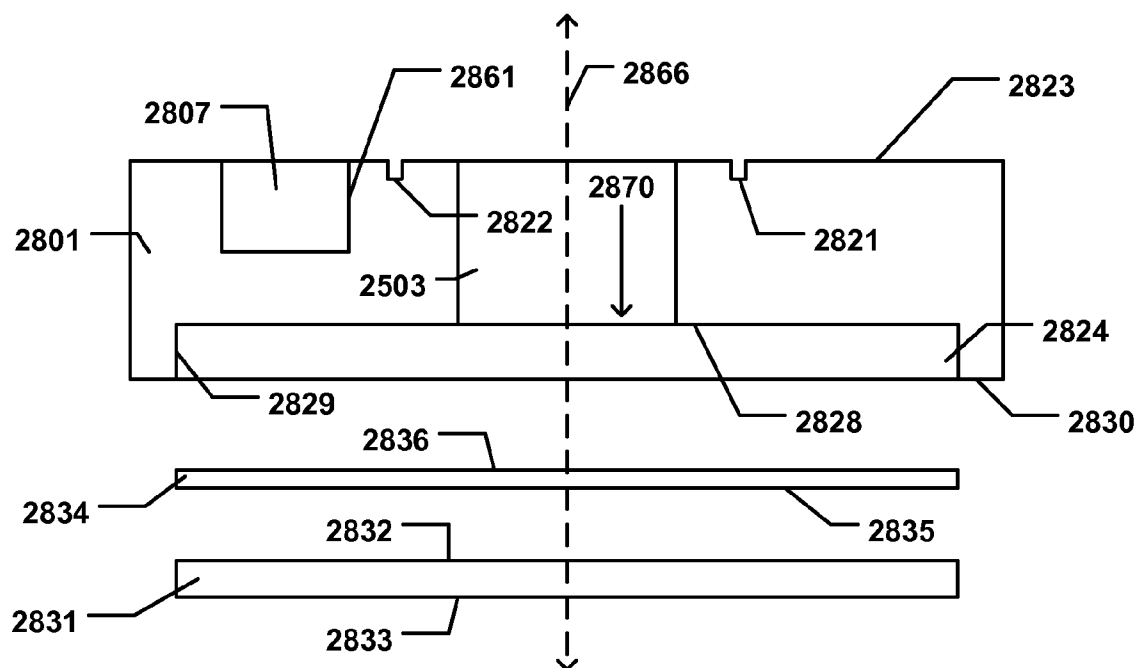


FIG. 28B

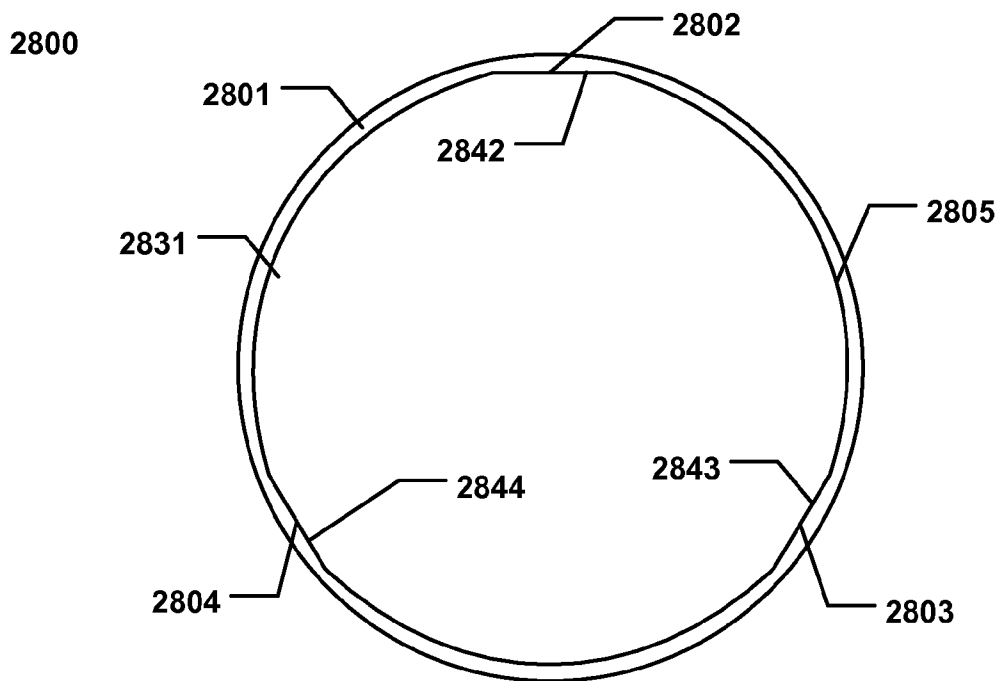


FIG. 28C

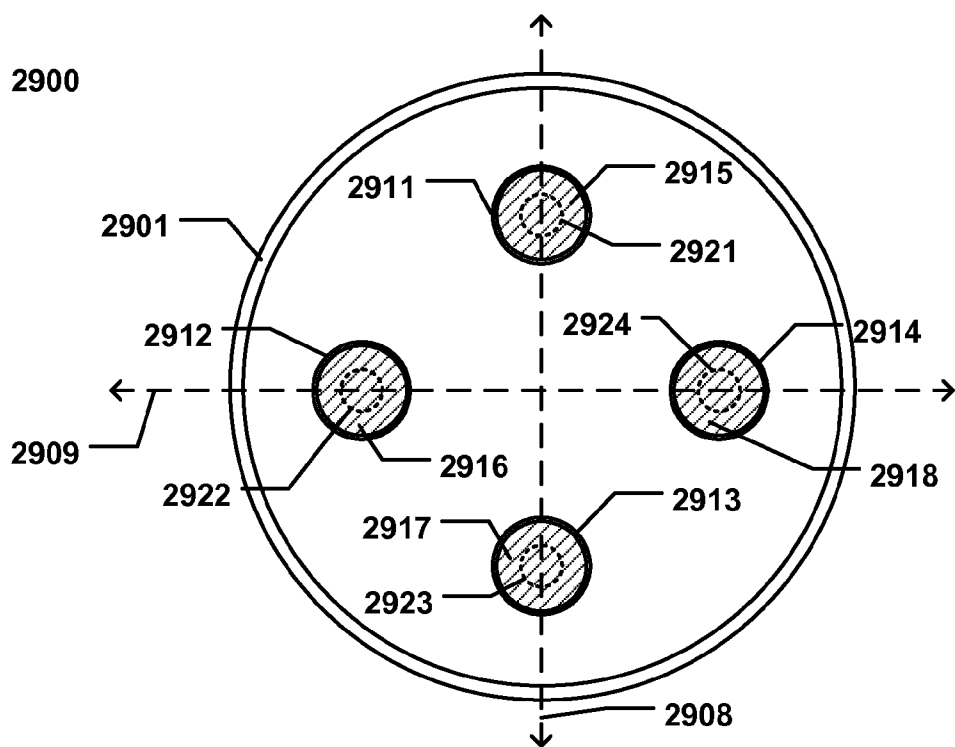


FIG. 29

ABRASIVE TOOL FOR USE AS A CHEMICAL MECHANICAL PLANARIZATION PAD CONDITIONER

CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] The present application claims priority from (i) U.S. Provisional Patent Application No. 61/162,893, filed Mar. 24, 2009, entitled "Abrasive Tool For Use As A Chemical Mechanical Planarization Pad Conditioner," naming inventors Charles Dinh-Ngoc, Srinivasan Ramanath, Eric M. Schulz, Jianhui Wu, Thomas Puthanangady, Ramanujam Vedantham, and Taewook Hwang, and (ii) U.S. Provisional Patent Application No. 61/235,980, filed Aug. 21, 2009, entitled "Abrasive Tool For Use As A Chemical Mechanical Planarization Pad Conditioner," naming inventors Charles Dinh-Ngoc, Srinivasan Ramanath, Eric M. Schulz, Jianhui Wu, Thomas Puthanangady, Ramanujam Vedantham, and Taewook Hwang, which applications are both incorporated by reference herein in their entirety.

BACKGROUND

[0002] 1. Field of the Disclosure

[0003] The following application is directed to an abrasive tool, and more particularly to an abrasive tool for use as a chemical mechanical planarization pad conditioner.

[0004] 2. Description of the Related Art

[0005] In the fabrication of electronic devices, multiple layers of various types of material are deposited including for example conducting, semiconducting, and dielectric materials. Successive deposition or growth and removal of various layers results in a non-planar upper surface. A wafer surface that is not sufficiently planar will result in structures that are poorly defined, with the circuits being nonfunctional or exhibiting less than optimum performance. Chemical mechanical planarization (CMP) is a common technique used to planarize or polish workpieces such as semiconductor wafers.

[0006] During a typical CMP process, a workpiece is placed in contact with a polishing pad and a polishing slurry is provided on the pad to aid in the planarization process. The polishing slurry can include abrasive particles which may interact with the workpiece in an abrasive manner to remove materials, and may also act in a chemical manner to improve the removal of certain portions of the workpiece. The polishing pad is typically much larger than the workpiece, and is generally a polymer material that can include certain features, such as micro-texture suitable for holding the slurry on the surface of the pad.

[0007] During such polishing operations, a pad conditioner is typically employed to move over the surface of the polishing pad to clean the polishing pad and properly condition the surface to hold slurry. Polishing pad conditioning is important to maintaining a desirable polishing surface for consistent polishing performance, since the surface of the polishing pad wears down over time and resulting in smoothing of micro-texture of the pad. Still, the conditioning operation faces certain obstacles, including the presence of polishing debris which can clog the components, chemical corrosion, conditioner geometry irregularity, conditioner over-use, and grain pull-out, which can interfere with conditioning operations and damage the sensitive electronic components being polished.

[0008] Accordingly, the industry continues to demand improved CMP pad conditioners and methods of forming thereof.

SUMMARY

[0009] According to a first aspect an abrasive tool includes a CMP pad conditioner having a substrate including a first major surface and a second major surface opposite the first major surface, a first layer of abrasive grains attached to the first major surface, and a second layer of abrasive grains attached to the second major surface. The abrasive tool can further include a first indicia on the substrate corresponding to the first major surface and identifying a wear status of the first layer of abrasive grains.

[0010] In another aspect, an abrasive tool includes a CMP pad conditioner having a substrate including a first major surface, a second major surface opposite the first major surface, and a side surface extending between the first major surface and the second major. The CMP pad conditioner further includes a first layer of abrasive grains attached to the first major surface, a second layer of abrasive grains attached to the second major surface, and a first sealing member extending in a peripheral direction along a portion of the side surface of the substrate.

[0011] In still other aspects, an abrasive tool for use as a CMP pad conditioner is disclosed that includes a plate, and an abrasive article that includes a substrate having a first major surface and a second major surface opposite the first major surface. The CMP pad conditioner also includes a first layer of abrasive grains attached to the first major surface, a second layer of abrasive grains attached to the second major surface, and an engagement structure configured to engage a portion of the plate and removably couple the abrasive article and the plate.

[0012] Other aspects are directed to an abrasive tool for use as a CMP pad conditioner including a plate and an abrasive article having a substrate including a first major surface and a second major surface opposite the first major surface, a first layer of abrasive grains attached to the first major surface, and a second layer of abrasive grains attached to the second major surface. The abrasive tool is formed such that the plate and abrasive article are removably coupled via a coupling mechanism.

[0013] In accordance with another aspect, an abrasive tool for use as a CMP pad conditioner includes an abrasive article made of a substrate having a first major surface and a second major surface opposite the first major surface, a first layer of abrasive grains attached to the first major surface, and a second layer of abrasive grains attached to the second major surface. In particular, the plate includes a magnet for removably coupling the plate and abrasive article.

[0014] According to still another aspect, an abrasive tool for use as a CMP pad conditioner is disclosed that includes a plate comprising a recess, and an abrasive article removably coupled within the recess. The abrasive article includes a substrate having a first major surface and a first layer of abrasive grains attached to the first major surface, and wherein the first layer of abrasive grains have a flatness of not greater than about 0.02 cm as measured by optical auto-focusing technology.

[0015] Other aspects of the present disclosure are directed to a method of forming an abrasive article that includes the steps of placing a first bonding layer material on a first major surface of a substrate, wherein the substrate comprises an

engagement structure configured to removably couple the substrate to a plate, and placing a first layer of abrasive grains within the first bonding layer material. The method further includes placing a second bonding layer material on a second major surface of the substrate, wherein the second major surface is opposite the first major surface, placing a second layer of abrasive grains within the second bonding layer material, and forming a CMP pad conditioner comprising a first abrasive surface defined by the first layer of abrasive grains on the first major surface and a second abrasive surface defined by the second layer of abrasive grains on the second major surface.

[0016] In another aspect an abrasive tool includes a CMP pad conditioner made of a substrate having a first major surface and a second major surface opposite the first major surface, wherein the first major surface includes an abrasive texture including a first upper surface defined by upper portions of a first set of protrusions extending from a lower surface defined by a first set of grooves separating the first set of protrusions. The second major surface includes an abrasive texture including a second upper surface defined by upper portions of a second set of protrusions extending from a lower surface defined by a second set of grooves separating the second set of protrusions.

[0017] According to still another aspect, a method of dressing a CMP pad is disclosed that includes the steps of coupling an abrasive article to a dressing machine, the abrasive article includes a substrate having a first major surface and a second major surface opposite the first major surface, wherein the abrasive article includes a first abrasive surface at the first major surface of the substrate, and a second abrasive surface at the second major surface of the substrate, and wherein the abrasive article is mounted on the dressing machine to expose the first abrasive surface. The method further includes contacting the first abrasive surface to a surface of a first CMP pad and moving the first CMP pad relative to the first abrasive surface to condition the first CMP pad, inverting the abrasive article to expose the second abrasive surface, and contacting the second abrasive surface to a surface of a second CMP pad and moving the second CMP pad relative to the second abrasive surface to condition the second CMP pad.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The present disclosure may be better understood, and its numerous features and advantages made apparent to those skilled in the art by referencing the accompanying drawings.

[0019] FIG. 1 includes a flowchart for forming an abrasive article in accordance with an embodiment.

[0020] FIGS. 2A-2E include cross-sectional illustrations of an abrasive article in accordance with an embodiment.

[0021] FIG. 3 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0022] FIG. 4 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0023] FIG. 5 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0024] FIG. 6 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0025] FIG. 7 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0026] FIG. 8 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0027] FIG. 9 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0028] FIG. 10 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0029] FIG. 11 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0030] FIG. 12A includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0031] FIGS. 12B-12C include top views of an abrasive tool in accordance with an embodiment.

[0032] FIG. 13 includes a top view of an abrasive tool in accordance with an embodiment.

[0033] FIG. 14 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0034] FIG. 15 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0035] FIG. 16 includes a top view of an abrasive tool in accordance with an embodiment.

[0036] FIG. 17 includes a top view of an abrasive tool in accordance with an embodiment.

[0037] FIG. 18 includes a top view of an abrasive tool in accordance with an embodiment.

[0038] FIG. 19 includes a top view of an abrasive tool in accordance with an embodiment.

[0039] FIG. 20 includes a top view of an abrasive tool in accordance with an embodiment.

[0040] FIG. 21 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0041] FIG. 22 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0042] FIG. 23 includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment.

[0043] FIGS. 24A-24D include illustrations of a method of using an abrasive article for conducting a CMP pad conditioning operation in accordance with an embodiment.

[0044] FIG. 25A includes a top view of a backside of a plate in accordance with an embodiment.

[0045] FIG. 25B includes a cross-sectional illustration of a portion of the plate of FIG. 25A in accordance with an embodiment.

[0046] FIG. 25C includes a cross-sectional illustration of a CMP pad conditioner in accordance with an embodiment.

[0047] FIGS. 25D-25G include cross-sectional illustrations of portions of side regions of a CMP pad conditioner in accordance with embodiments.

[0048] FIG. 26A includes a cross-sectional illustration of a conditioning system including a plate and CMP pad conditioner in accordance with an embodiment.

[0049] FIG. 26B includes a cross-sectional illustration of a conditioning system including a plate and CMP pad conditioner in accordance with an embodiment.

[0050] FIGS. 27A-27C include cross-sectional illustrations of a portion of a CMP pad conditioner and plate in accordance with an embodiment.

[0051] FIG. 28A includes a top view of a plate in accordance with an embodiment.

[0052] FIG. 28B includes a cross-sectional illustration of the plate of FIG. 28A in accordance with an embodiment.

[0053] FIG. 28C includes a top view of a plate and CMP pad conditioner in accordance with an embodiment.

[0054] FIG. 29 includes a top view illustration of an abrasive tool in accordance with an embodiment.

[0055] The use of the same reference symbols in different drawings indicates similar or identical items.

DETAILED DESCRIPTION

[0056] The following is directed to an abrasive tool for use as a chemical mechanical planarization (CMP) pad conditioner, also referred to as a dresser. The abrasive tool includes a plurality of features including an abrasive article having two (first and second) abrading surfaces and coupling mechanisms for removably coupling the abrasive article with a fixture or plate. The abrasive tool can include different types of engagement structures facilitating removal and reversing of the abrasive tool such that both first and second abrading surfaces are useable.

[0057] FIG. 1 includes a flowchart demonstrating a method of forming an abrasive tool in accordance with an embodiment. As illustrated, the process can be initiated at step 101 by placing a first bonding layer material on a first major surface of a substrate.

[0058] Generally, the substrate is made of a material suitable for withstanding the rigors of abrasive processing. For example, the substrate can be a material having an elastic modulus of at least 2E3MPa. In other embodiments, the substrate may be made of a material having a greater elastic modulus, such as on the order of at least about 5E3MPa, such as at least about 1E4MPa, or even at least about 1E5MPa. In particular instances, the substrate material has an elastic modulus within a range between about 2E3MPa and about 4E5.

[0059] For example, the substrate can include materials such as metals, metal alloys, ceramics, polymers, or a combination thereof. In accordance with one particular embodiment, the substrate is made of a metal alloy, such as steel. For some embodiments, as will be appreciated herein, the substrate can include a material that is magnetized or capable of being magnetized.

[0060] The substrate can have a certain shape, including for example, a generally disk-like shape having a first major surface and a second major surface that are opposite each other and substantially parallel with each other. The first major surface and second major surface can be connected by a side surface that defines the height of the substrate. While the substrate can have a disk-like shape with a circular contour, such that the shape of the substrate is cylindrical, other shapes are contemplated. For example, the substrate can have a rectangular or polygonal shape, such that the substrate has substantially planar sides that may be parallel to each other. Notably, the substrate can include other features (e.g., engagement structures) that will be described in more detail herein.

[0061] Placement of a first bonding layer material on the first major surface of the substrate can include the application of a layer of material, which may be applied to the substrate surface in the form of a film, foil, tape, or the like. Typically, the application of the bonding layer material is in a manner such that the bonding layer has a sufficient thickness to contain abrasive grains therein and form a homogeneous bonding layer material during processing. For example, in one embodiment, the bonding layer material can include a metal or metal alloy. Particularly useful metals can include transition metals. For example, the bonding layer material can be a braze material that includes transition metals such as nickel, chromium, titanium, tin, gold, palladium, silver, and a combination thereof.

[0062] In still other embodiments, the first bonding layer material can be a polymer material. Particularly suitable polymer bonding layer materials can include thermoplastics and thermosets, polyamides, polyimides, polyesters, polyethers, fluoropolymers, and a combination thereof. For example, particularly suitable polymer materials for use in the first bonding layer can include epoxies, acrylics, and a combination thereof. Certain bonding layer materials can also incorporate phenol formaldehyde.

[0063] The first bonding layer material can include fillers, which may improve the mechanical characteristics of the bond material making the bond material more durable. Additionally, filler particles can be used to match the coefficient of thermal expansion of braze-filler combination to that of braze-abrasive combination to inhibit out-of-flatness. Likewise, such inert fillers can be used to prevent sticking of braze to the plate or refractory on which the unfinished tool rests during thermal processing, so as to inhibit out-of-flatness. In addition, such inert fillers may improve wear resistance and can operate as an abrasive, if so desired.

[0064] After placing a first bonding layer material on a first major surface at step 101, the process continues at step 103 by placing a first layer of abrasive grains within the first bonding layer material. Various methods may be used for placement of the abrasive grains within the bonding layer material. For example, the abrasive grains may be placed within the bonding layer in a random arrangement having no short range or long range order. Alternatively, the placement of the abrasive grains may be completed in a manner such that the grains have a pattern, and even arranged in a pattern having long range order, such as an array (e.g., face centered cubic pattern, cubic pattern, hexagonal pattern, rhombic pattern, spiral pattern, random pattern, and combinations of such patterns). In particular instances, the abrasive grains may be placed at particular locations within the bonding layer such that they are arranged in a self-avoiding random distribution (i.e., a SARD™ pattern), which is particularly suitable for conditioning CMP pads.

[0065] The abrasive grains may be particularly hard materials, such that the abrasive grains can have a Vickers hardness of at least about 1500 kg/mm². In particular instances, the abrasive grains can include materials such as oxides, borides, nitrides, carbides, carbon-based structures (including man-made carbon-based materials such as fullerenes), and a combination thereof. In some instances, superabrasive materials such as cubic boron nitride or diamond can be used as the abrasive grains.

[0066] The abrasive grains can have an average grit size suitable for conditioning pads in CMP processing. For such applications, the average grit size can be less than about 250

microns. However, in other instances, smaller abrasive grains may be used such that the average grit size is not greater than about 200 microns, not greater than about 100 microns, or even not greater than about 50 microns. In particular instances, the abrasive grains have an average grit size within a range between about 1 micron and about 250 microns, such as within a range between about 1 micron and about 100 microns.

[0067] After placing the first layer of abrasive grains within the first bonding layer material at step **103**, the process can continue at step **105** by placing a second bonding layer material on a second major surface of the substrate. As described above, the substrates can have a disk like or cylindrical shape such that the first major surface and second major surface are opposite to and substantially parallel with each other. The first and second major surfaces can be spaced apart from each other and connected to each other by the side surface. Placement of the second bonding layer material can include processes that are similar to, or the same as, the placement of the first bonding layer material on the first major surface. In particular processes, the placement of the second bonding layer may include suspension of the substrate such that the completed first bonding layer material and the first layer of abrasive grains are not in contact with any surfaces. Suspension of the substrate while forming the second bonding layer avoids a change in the placement or orientation of the first layer of abrasive grains, or even dulling of the first layer of abrasive grains. The substrate may be suspended using mechanical means, pressurized means, or the like.

[0068] In accordance with one embodiment, the second bonding layer material can be the same bonding layer material as the first bonding layer material. Still, in alternative designs, it may be suitable that the second bonding layer material be a different material than the first bonding layer material. Such designs may be suitable for varying the capabilities of the abrasive article such that the first bonding layer material is suitable for a first type of dressing operation and the second major surface of the substrate is suitable for a different dressing operation.

[0069] After placing the second bonding layer material on the second major surface at step **105**, the process can continue at step **107** by placing a second layer of abrasive grains within the second bonding layer material. Like step **102** described above, the placement of the second layer of abrasive grains can be completed in a random arrangement, a patterned arrangement, or even a self-avoiding random distribution (SARDTM). Moreover, the second layer of abrasive grains can have the same arrangement as the first layer of abrasive grains.

[0070] Additionally, the abrasive grains used in the second layer can be the same as the abrasive grains of the first layer, including the same type of material and the same average grit size. However, in particular embodiments, the abrasive grains of the second layer can be different from the abrasive grains used in the first layer of abrasive grains. Use of different abrasive grains between the first major surface and second major surface may facilitate formation of an abrasive article capable of conducting different dressing operations. For example, the abrasive grains of the second layer may contain a different type of material than the abrasive grains of the first layer. In some designs, the abrasive grains of the second layer can have a different average grit size for completing a different dressing operation either on the same CMP pad or a different type of CMP pad.

[0071] After placing the second layer of abrasive grains within the second bonding layer material at step **107**, the process continues at step **109** by heating the substrate to form a CMP pad conditioner. Heating can be completed in a manner suitable for forming a braze layer from the first and second bonding layer material to secure the abrasive grains to the substrate.

[0072] In particular embodiments, the process of heating includes suspending the substrate material, such the abrasive grains of the first layer and the second layer are spaced apart from any contact surfaces. Such an arrangement avoids reorienting, rotating, and/or dulling of the abrasive grains during processing. In certain processes, during heating the substrate can be suspended in a vertical position above the furnace floor, such that the substrate is oriented at a perpendicular angle to the furnace floor. In other embodiments, the substrate can be suspended in a horizontal position above the furnace floor, such that the first major surface and second major surface are substantially parallel to the furnace floor. And still, in other embodiments, the substrate may be angled relative to the furnace floor, such that the first major surface and second major surface of the substrate are neither parallel nor perpendicular to the furnace floor.

[0073] According to one process, the substrate may change position during the heating process relative to a starting position and a stopping position. Changing the position of the substrate during heating can facilitate the formation of an abrasive article having a particular uniform bonding layer while also facilitating maintaining the original position of the abrasive grains. For example, changing the position of the substrate can include rotating, tilting, or inverting the substrate during heating. Such a process is particularly suitable for an abrasive article having bonding layer material and abrasive grains on first and second major surfaces.

[0074] The forming process described herein facilitates the formation of a reversible abrasive article having first and second major surfaces, each of which are suitable for abrasive processes. Moreover, the process described herein facilitates the formation of an abrasive article having superior flatness with regard to the first layer of abrasive grains and second layer of abrasive grains. The superior flatness facilitates improved processing and dressing of CMP pads.

[0075] Referring to FIG. 2A a cross-sectional illustration of an abrasive article in accordance with an embodiment is provided. In particular, the abrasive article **200** includes a substrate **201** having a first major surface **202** and a second surface **204** opposite the first major surface **202**, wherein the first and second major surfaces **202** and **204** are joined by a side surface **206**. A first bonding layer **203** overlies and abuts the first major surface **202**, and a first layer of abrasive grains **221** is contained within the bonding layer **203**, such that the abrasive grains are secured to the substrate **201**. As illustrated, the first layer of abrasive grains **221** can have superior flatness as measured using a non-contact optical measuring method using various wavelengths of light to calculate distances along the surface and generate a map of the flatness of the sample. For example, the first layer of abrasive grains can have a flatness of not greater than about 0.02 cm, such as not greater than about 0.01 cm, or even not greater than about 0.005 cm. Such flatness measurements are gathered using optical auto-focusing technology to measure distance between points. An example of such technology is the Benchmark 450TM commonly available from VIEW Engineering, Inc.

[0076] The flatness of the first layer of abrasive grains **221** is relative to the flatness of the first bonding layer, and the orientation and size of the abrasive grains. As illustrated, the abrasive article **200** defines a lower working surface **211** generally defined by a plane extending through the upper most surfaces of the abrasive grains set at the lowest height above the surface of the bonding layer **203**. The abrasive article **200** further illustrates an upper working surface **213** defined by a plane extending through the upper most surfaces of the abrasive grains set at the greatest height above the surface of the bonding layer **203**. The difference between the lower working surface **211** and upper working surface **213** is the working surface distortion height **215** (Ah), which can be affected by a non-planar surface of the bonding layer **203** and further amplified by differences in grain sizes within the first layer of abrasive grains **221**. Notably, the forming process described herein facilitates the formation of abrasive articles having a reduced working surface distortion height **215** and superior flatness. In particular, the abrasive article **200** has a symmetry about the center of the substrate such that the first and second major surfaces **202** and **204** are formed to have similar structures including bonding layers **203** and **205** and layers of abrasive grains **221** and **223**. Such symmetry facilitates the formation of an abrasive article **200** having superior flatness and working surface distortion height with respect to the layers of abrasive grains **221** and **223** which is particularly suitable for conditioning of CMP pads.

[0077] As illustrated, the abrasive article **200** includes a bonding layer **205** attached to and abutting the second major surface **204** of the substrate **201**. A layer of abrasive grains **223** are contained and secured within the bonding layer **205**. Notably, the layer of abrasive grains **223** can have the same degree of flatness and working surface distortion height as the layer of abrasive grains **221** described herein.

[0078] Moreover, the abrasive article **200** can have a side surface **206** having particular contours facilitating the formation of the abrasive article **200**. For example, the substrate **201** can include engagement structures along the side surfaces for improving the forming process and also providing coupling structures for removably coupling the substrate **201** to a plate during conditioning operations. According to the illustrated embodiment, the engagement structures can include recesses **207** and **208** within the side surface **206** that extend laterally into the interior of the substrate **201**. The recesses **207** and **208** can be used to hold the substrate **201** (e.g., suspend the substrate **201**) during processing for suitable formation of the bonding layers **203** and **205** and layers of abrasive grains **221** and **223**. Additionally, the recesses **207** and **208** can provide formations for securing the abrasive article **200** within a plate as will be described in further embodiments. Other engagement structures are contemplated and will be described in more detail herein.

[0079] The abrasive article **200** further includes indicia **231** and **232** disposed on the side surface **206** of the substrate **201**. The indicia **232** corresponds to the first major surface **202** of the substrate **201** and the layer of abrasive grains **221** for identifying a wear status of the layer of abrasive grains **221**. Likewise, the indicia **231** corresponds to the second major surface **204** and is used to identify a wear status of the layer of abrasive grains **223**. During use, the indicia **231** and **232** can indicate the wear status by identifying the number of times the layer of abrasive grains have been used in a conditioning operation. The indicia aid a user in identifying the side that is

used versus a side that is unused, and further aids identification of the remaining useable life of a corresponding layer of abrasive grains.

[0080] The indicia **231** and **232** of FIG. 2A are illustrated as markings incorporating arrows corresponding to the layers of abrasive grains **223** and **221** respectively. It will be appreciated that upon completed use of either of the layer of abrasive grains **223** and **221**, a user may mark or score the indicia **231** or **232** indicating the corresponding layer of abrasive grains **223** or **221** have been used. In different embodiments, the indicia can include other means of identifying the wear status of the layers of abrasive grains **223** and **221**. For example, the indicia may include physical markings or printed markings, such as roman numerals, indicating the number of times the respective layer of abrasive grains **221** and **223** have been used.

[0081] In accordance with another embodiment, certain indicia can include color indicators, wherein the indicia have different color states identifying the wear status of the respective layer of abrasive grains **223** or **221**. In particular, the color indicators can have various color states wherein the color of the indicia changes with repetitive exposure to certain chemicals used in the CMP process. In accordance with other embodiments, other physical markings may be used as the indicia **231** and **232**. Alternatively, the indicia may be a user implemented material, such as a piece of adhesive or tape or other identifying structure indicating the number of times a layer of abrasive grains has been used and ultimately the wear status of the layer of abrasive grains.

[0082] FIG. 2B includes a cross-sectional view of an abrasive article in accordance with an embodiment. The abrasive article **240** has the same features as the abrasive article **200** of FIG. 2A including a substrate **201** having a first major surface **202**, a second surface **204** opposite the first major surface **202**, and a side surface **206**. The abrasive article further includes a first bonding layer **203** overlying and abutting the first major surface **202**, and a first layer of abrasive grains **221** contained within the bonding layer **203**, such that the abrasive grains are secured to the substrate **201**. A second bonding layer **205** overlies and abuts the second major surface **204**, and a second layer of abrasive grains **223** are contained within the bonding layer **205** such that the abrasive grains are secured to the substrate **201**. Notably, the abrasive article **230** includes different engagement structures **237** and **238** than the abrasive article **200**. As illustrated, the engagement structures **237** and **238** are protrusions that extend from the side surface **206** of the substrate **201** in a radial direction parallel that to the axis **291**.

[0083] FIG. 2B further includes axes **290** and **291**, which are perpendicular to each other and define directions to aid the description of embodiments. The axis **290** extends through the abrasive article and defines a longitudinal or axial direction, which generally extends through a thickness of the abrasive article **230**. The axis **291** extends through the abrasive article and defines a lateral or radial direction, thereby defining a width or circumference of the abrasive article **230**. As used in the embodiments herein, reference to such directions will be understood to reference the general directions illustrated by the axes **290** and **291**.

[0084] FIG. 2C includes a cross-sectional view of an abrasive article in accordance with an embodiment. The abrasive article **250** has the same features as the abrasive article **200** of FIG. 2A including a substrate **201** having a first major surface **202** and a second surface **204** opposite the first major surface

202 that is joined by a side surface **206**. The abrasive article **250** further includes a first bonding layer **203** overlying and abutting the first major surface **202**, and a first layer of abrasive grains **221** contained within the bonding layer **203**, such that the abrasive grains are secured to the substrate **201**. Also illustrated is a second bonding layer **205** overlying and abutting the second major surface **204**, and a second layer of abrasive grains **223** contained within the bonding layer **205**, such that the abrasive grains are secured to the substrate **201**. Notably, the abrasive article **250** includes different engagement structures **257** and **258** than the abrasive article **200**. As illustrated, the engagement structures **257** and **258** include a combination of grooves and protrusions on the side surface **206** of the substrate **201**. In particular embodiments, the combination of grooves and protrusions can include a helical pattern, extending around the periphery of the side surface and forming a threaded engagement structure, such that the abrasive article can be screwed on a complementary structure, such as a plate including complementary threads.

[0085] The abrasive article **250** further includes a protective layer **261** overlying the layer of abrasive grains **223**. The protective layer **261** provides a layer of material overlying the abrasive grains to safeguard the grains from damage during shipping and further during use of the opposite side of the abrasive article **250**. According to one embodiment, the protective layer **261** can include a material that is removable when the user is ready to use the layer of abrasive grains **223**. The material may be removable using physical or mechanical force (i.e., peeling), heat, chemicals, radiation, or the like. As will be appreciated, the protective layer **261** can be provided on both sides of the abrasive article **250** such that before use, a protective layer **261** covers both layers of abrasive grains **221** and **223**.

[0086] For example, the protective layer **261** can include a polymer material, such as a thermoset, thermoplastic, resin, elastomer, and a combination thereof. Particularly suitable polymer materials can include acetates (e.g., polyvinyl acetate), polyamides, polyimides, polyurethanes, polyesters, fluoropolymers, gels, silicone, polyxylylenes (e.g., poly-para-xylylene or Parylene™) and a combination thereof. In certain designs, the protective layer **261** can include a porous material, such as a foam material providing additional protection to mechanical shocks and/or vibrations.

[0087] Certain protective layers **261** can include materials suitable for absorbing shock and protecting the covered portions of the abrasive article **250** covered. For example, the protective layer **261** can have a Shore A hardness of not greater than about 90 A based on the ASTM D2240 type A scale. In other embodiments, the protective layer **261** can have a Shore A hardness of not greater than about 80 A, such as not greater than about 70 A, not greater than about 60 A, or even not greater than about 50 A. Particular protective layers **261** have a Shore A hardness within a range between about 10 A and about 90 A, for example between about 20 A and about 70 A, and more particularly within a range between about 30 A and about 60 A.

[0088] FIG. 2D includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive article **270** can include a substrate **268** having a first major surface **202** and a second major surface **204**. Unlike previously described embodiments, the abrasive article **270** can be a monolithic article including the substrate **268** that has abrasive texture **263** and **264** integrally formed in the first and second major surfaces **202** and **204** of the substrate body. That

is, the abrasive tool **270** may not necessarily include a bonding layer or abrasive grains contained in the major surfaces of the substrate **268**.

[0089] According to one embodiment, the abrasive article **270** includes a first set of protrusions **273** formed in the first major surface **202** of the substrate **268**. The first set of protrusions **273** extend in an axial direction from a lower surface **271** of the substrate **268**. The first set of protrusions **273** also define a first set of grooves **274** extending between each of the protrusions of the first set of protrusions **273**. Additionally, the abrasive article **270** includes a first upper surface **272** defined by the upper portions **275** of the first set of protrusions **273** that is axially displaced at a distance from the first major surface **202** and also axially displaced at a distance from the lower surface **271**. This design ensures that the protrusions can suitably engage and condition a CMP pad and reduce the likelihood of contact by other surfaces (e.g., **202** and **271**) with the pad. Moreover, such a design facilitates proper abrasion of a CMP pad and swarf removal.

[0090] The first set of protrusions **273** can be formed in a random manner on the first major surface **202**. However, in particular instances, the first set of protrusions **273** can be arranged in a pattern, such as any of those discussed with regard to the abrasive articles herein, for example, in the form of a self-avoiding random distribution (SARD™) pattern.

[0091] The substrate **268** can be formed of those materials previously described herein. For example, a material having an elastic modulus within a range between about 2E3 MPa and about 4E5. Certain substrate **268** materials can include metals, metal alloys, ceramics, polymers, and a combination thereof. Some embodiments may utilize a metal or metal alloy material that is magnetized or capable of being magnetized to facilitate removable coupling of the abrasive article **270** with a plate. More details of the removable coupling features incorporating magnets if provided herein.

[0092] Certain designs utilize a substrate **268** that includes an abrasive material, such that the sets of protrusions **273** and **277** integrally formed with the substrate **268** are made of an abrasive material. Suitable abrasive materials can include oxides, carbides, borides, nitrides, and a combination thereof. One particular embodiment utilizes a substrate **268** and sets of protrusions **273** and **277** comprising alumina.

[0093] Each of the protrusions of the first set of protrusions **273** can have a height (h) and a width (w) that defines a two-dimensional lateral contour. The two-dimensional lateral contour of the protrusions illustrated in FIG. 2D is a generally triangular shape. However, the protrusions can have other polygonal shapes, including for example, rectangular, trapezoidal, and the like. Moreover, each of the protrusions within the first set of protrusions **273** may not necessarily each have the same shape. For example, within each set of protrusions, a combination of different polygonal two-dimensional lateral contours may be utilized.

[0094] As illustrated, the abrasive article **270** is formed such that it is a reversible CMP pad conditioning tool, having first abrasive texture **263** on the first major surface **202** and second abrasive texture **264** on the second major surface **204**. This design facilitates a process wherein a user can use the first abrasive texture **263** to condition a CMP pad or a series of CMP pads, and upon complete use of the first abrasive texture **263**, invert the abrasive article **270** and use the second abrasive texture **264** on the opposite surface to carry out conditioning processes on a CMP pad or a series of CMP pads.

[0095] The second abrasive texture 264 can include features similar to the first abrasive texture 263. Notably, the second abrasive texture 264 is integrally formed within the body of the substrate 268 and includes a second set of protrusions 277 extending axially from a lower surface 276 defined by a second set of grooves 279 extending between each of the protrusions of the second set of protrusions 277. The second set of protrusions 277 include upper portions 278 that define a second upper surface 280 axially displaced from the second major surface 204 and lower surface to facilitate suitable engagement of the second set of protrusions 277 with a CMP pad during a conditioning operation.

[0096] The second set of protrusions 277 can be oriented in the same manner at the second major surface 204 as the first set of protrusions 273. That is, they may be formed in a same random arrangement, or alternatively, formed in a same patterned arrangement. Moreover, each of the protrusions within the second set of protrusions 277 can have the same two-dimensional lateral contour as each of the protrusions of the first set of protrusions 273. Still, in particular embodiments, the arrangement or lateral contour of the protrusions of the second set of protrusions 277 can be different from the arrangement or lateral contour of the protrusions within the first set of protrusions 273.

[0097] As further illustrated in FIG. 2D, the abrasive article 270 can have engagement structures 257 and 258 for removably coupling the substrate 268 with a plate for reversible operation of the abrasive article 270. It will be appreciated that while particular engagement structures are illustrated, the abrasive article 270 can incorporate any of the engagement structures described herein for removable coupling with a plate.

[0098] Given the distinct features noted above with regard to the abrasive article 270, the method of forming the such an abrasive article may be different than the method described in accordance with FIG. 1. Notably, the method may not include the placement of layers of abrasive grains within a bonding layer on opposite major surfaces of a substrate. Rather, in certain forming processes, the substrate 268 is obtained as a blank piece of material, having limited or no texture or other contours. The substrate 268 can be machined to have the proper contours including the abrasive texture on the first and second major surfaces. Additionally, the engagement structures can be formed within the substrate during the same machining process. The machining operations can be automated, and can include the use of computer guided lathes, other cutting instruments, and the like.

[0099] According to another method of forming the abrasive article 270, the substrate 268 can be a molded article or cast article. In particular instances, the abrasive texture 263 and 264 can be formed simultaneously with the forming of the substrate 268. The molding or casting process can start with various raw materials, such as powder raw materials to be molded or a slurry of material to be cast. The molding or casting process can be conducted to obtain a near final shape piece, including the substrate body having the first and second set of protrusions. After molding or casting, the piece can be dried, heat treated (e.g., sintered) and machined.

[0100] FIG. 2E includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. Like the abrasive article 270 of FIG. 2D, the abrasive article 290 includes a substrate 268 having a first major surface 202 and a second major surface 204. In particular, the abrasive article 290 is a monolithic article including a substrate 268 having

abrasive texture 263 and 264 integrally formed in the first and second major surfaces 202 and 204 of the substrate body. That is, the abrasive tool 290 may not necessarily include a bonding layer or abrasive grains contained in the major surfaces of the substrate 268.

[0101] As provided in the illustrated embodiment, the abrasive article has a different shape, wherein the lower surface 291 and the first major surface 202 are within the same plane. Likewise, the lower surface 296 and the second major surface 204 are within the same plane. This design removes the distinction between these planes and may aid swarf removal and conditioning.

[0102] Moreover, the abrasive article 290 includes a magnet 293 within the substrate 268 that can facilitate removable coupling between the abrasive article 290 and a plate. The magnet 293 can be embedded within the body of the substrate 268 such that it is surrounded on all sides by the material of the substrate 268. In other embodiments, the abrasive article 290 can incorporate more than one magnet, such as a series of magnets embedded within the body of the substrate 268. The embodiments incorporating a series of magnets within the body of the substrate 268 may do so in a manner such that the magnets are aligned with each other along the radial axis. It will be appreciated throughout the disclosure that any of the abrasive articles illustrated in FIGS. 2A-2E may can be combined with any of the abrasive tools of the embodiments herein.

[0103] FIG. 3 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. In particular, the abrasive tool 300 includes an abrasive article 250 that is removably coupled to a plate 301. In particular, the plate 301 includes a recess 304 extending into the interior of the plate 301 and configured to provide a space for removably coupling the abrasive article 201. Moreover, the plate 301 and abrasive article 300 are removably coupled to each other via coupling mechanisms 351 and 352 that include the engagement structures 257 and 258 of the abrasive article 250 engaged with complementary coupling surfaces 261 and 262 of the plate 301. That is, the plate 301 has particular shapes and coupling surfaces 261 and 262 particularly designed to be removably coupled to the abrasive article 250 having first and second working surfaces incorporating abrasive grains.

[0104] As illustrated, the abrasive tool 300 includes a plate 301 having a recess 304 such that the abrasive article 250 can be removably coupled to the plate 301 within the recess 304. In accordance with a particular embodiment, the recess 304 has a depth 305 as measured between the upper surface 331 of the plate 301 and the bottom surface 309 of the recess 304. Notably, the depth 305 of the recess 304 can be significantly greater than the height 335 of the abrasive article 200, such that the layer of abrasive grains 223 contained within the recess 304 are spaced apart from the bottom surface 309. Such an arrangement facilitates sufficient spacing between the bottom surface 309 and first layer of abrasive grains 223 to avoid destruction, dulling, or altering of the characteristics and orientation of the abrasive grains 223.

[0105] As further illustrated, the abrasive tool 300 is designed such that the abrasive article 250 is particularly situated within the recess 304 of the plate 301. That is, the upper major surface 202 of the substrate 201 can be flush with the upper surface 331 of the plate 301 such that only the bonding layer 203 and layer of abrasive grains 221 extend above the upper surface 331 of the plate 301. Such a configuration facilitates the engagement of the layer of abrasive

grains 221 during a conditioning process and apt spacing between the upper surface 331 of the plate 301 and the pad during a dressing operation. The orientation between the abrasive article 250 and plate 301 in such a manner can be facilitated by the coupling mechanisms 351 and 352 which facilitate fixing the orientation between the abrasive article 250 and the plate 301. As will be appreciated and described in more detail herein, the coupling mechanisms 351 and 352 can include alternative features and engagement structures using a variety of connections, such as an interference fit connection, latches, fasteners, levers, clamps, chucks, or a combination thereof. Certain coupling mechanisms described herein may further include magnetic coupling devices and/or electrode coupling devices (e.g., anodic bonding) between the abrasive article 250 and the plate 301.

[0106] The plate can include a material that is suitable for use in CMP processing. For example, the plate 301 can include a same material as used in the substrate 201 of the abrasive article 200. Moreover, the plate 301 is generally formed of a material having suitable mechanical characteristics, such as an elastic modulus of at least 2E3MPa. For example, in particular embodiments, the plate 301 is made of a material having an elastic modulus within a range between about 2E3MPa and about 4E5MPa.

[0107] Some suitable materials for use as the plate 301 can include metals, metal alloys, polymers, and a combination thereof. For instance, in certain embodiments, the plate 301 is made of a metal material, such as a metal alloy, and particularly including transition metal elements. Alternatively, the plate 301 can include a polymer material, such that the plate is made of a durable polymer such as a thermoplastic, thermoset, or resin material. Notably, the plate 301 is designed to withstand repetitive CMP processing and dressing procedures. That is, the plate 301 is intended to be a reusable member, such that it may undergo many uses before being replaced. In short, the plate 301 is designed such that it is reusable member having a lifetime extending beyond that of the abrasive article 250.

[0108] The plate 301 can include recesses 302 and 303 configured for engagement with a fixture typically designed to hold the dresser, such that the plate 301 and abrasive article 250 can be rotated in accordance with a dressing operation. It will be appreciated that while the plate 301 is illustrated as having recesses 302 and 303 for engagement with a fixture, other engagement structures may be used such as an arbor hole through the center of the plate 301 or other structures suitably designed such that the plate 301 can be rotated with the abrasive article 200 for conditioning and dressing of a CMP pad.

[0109] FIG. 4 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. As illustrated, the abrasive tool includes a plate 301 having a recess 304 for removably coupling an abrasive article 200 therein. Notably, sealing members 409 and 410 can be disposed between the side surface 206 of the substrate 201 and side surfaces 341 and 342 of the plate 301 that define the recess 304. The sealing members 409 and 410 are intended to avoid penetration of CMP fluids and debris from penetrating the connection between the abrasive article 250 and the plate 301. Otherwise, such materials may contaminate other pads in subsequent dressing operations.

[0110] In accordance with an embodiment, the sealing members 409 and 410 can be attached to the substrate 201. For example, the sealing members 409 and 410 can extend in

a peripheral direction (i.e., around the periphery) on the side surface 206 of the substrate 201. In other embodiments, the sealing members 409 and 410 can be attached to the plate 301. Still, certain designs may incorporate one sealing member 409 that is fixedly attached to the substrate 201 and the second sealing member 410 can be fixedly attached to the plate 301. The sealing member 409 may extend in a direction along the periphery of the side surface 206 of the substrate 201. That is, the sealing member 409 can extend circumferentially (in the case of a circular substrate) around the entire periphery of the side surface 206 of the substrate 201. Likewise, the sealing member 410 can be engaged with the recess 403 and extend along the periphery, and particularly the entire periphery, of the side surface 206 of the substrate 201. In accordance with one embodiment, the sealing member 409 is disposed within a recess 401 along the side surface 206 of the substrate 201.

[0111] Additionally, the plate 301, and the side surface 341 of the plate 301 can be formed to include a complementary recess 407 for receiving the sealing member 409. Likewise, the sealing member 410 can be arranged in a similar configuration such that the substrate 201 has a receiving surface 403 for engagement with the sealing member 410 along the side surface 206. Moreover, the side surface 341 of the plate 301 can have a complementary receiving surface configured to accept and engage the sealing member 410 therein.

[0112] According to one particular design, the sealing member 409 and sealing member 410 can be spaced apart from each other. Certain designs incorporate the sealing member 409 disposed along the side surface 206 in a position that is closer to the first major surface 202 of the substrate 201, while the sealing member 410 is disposed in a position along the side surface 206 closer to the second major surface 204 of the substrate 201. Notably, each of the sealing members 409 and 410 are spaced apart from the engagement structure 307. Such a design facilitates the sealing members properly engaging the recesses 407 and 405 along the side surface 341 of the recess 304 independent of the orientation between the first layer of abrasive grains 221 or second layer of abrasive grains 223. That is, whether the abrasive article 250 is oriented as illustrated in FIG. 4, or inverted such that the layer of abrasive grains 223 are extending from the recess 304, the sealing members 409 and 410 are properly engaged within the recesses 405 and 407 of the plate 301.

[0113] The sealing members 409 and 410 can be a deformable or pliable member. For example, the sealing members 409 and 410 can include a polymer material. Some suitable polymer materials include elastomers. In accordance with one particular embodiment, the sealing members 409 and 410 can be o-rings. It will be appreciated that while the sealing members 409 and 410 are illustrated as having particular contours and placement. Other sealing members and configurations are contemplated. For example, the sealing member may be a single film or layer of material disposed between the substrate 201 and the plate 301.

[0114] FIG. 5 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive tool 500 includes an abrasive article 200 removably coupled to a plate 301 and contained within a recess 304 of the plate 301. A coupling mechanism that includes fasteners 505 and 506 facilitates removable coupling between the abrasive article 200 and the plate 301. According to the illustrated embodiment, the plate 301 can include openings 501 and 502 for engagement of fasteners therein. As illustrated, the fasteners may be angled relative to the upper surface 331 of the

plate 301 and relative the axial and radial directions, such that a user can access the fasteners 501 and 506. The openings 501 and 502 allow the fasteners 505 and 506 to be disposed within the plate 301 below the upper surface 331 to avoid engagement between the fasteners 505 and 506 and a CMP pad during a dressing operation.

[0115] Each of the openings 501 and 502 can include a channel portion 503 and 504 extending from the openings 501 and 502 through an interior portion of the plate 301. The channel portions 503 and 504 can have a diameter that is smaller than the openings 501 and 502 for engagement of the threaded portion of the fasteners 505 and 506 therein. The abrasive tool 500 can further include channel portions 509 and 510 that extend into the interior of the substrate 201. Notably, the channel portions 509 and 510 are aligned with the channel portions 503 and 504 along their longitudinal axes, such that the channel portions 503 and 509 are coaxial with each other and channel portions 504 and 510 are coaxial with each other. The alignment between the channel portions 503 and 504 of the plate 301 with the channel portions 509 and 510 of the substrate 201 facilitates engagement of the fasteners 505 and 506 therein and coupling between the plate 301 and substrate 201.

[0116] Proper alignment of the channel portions 503 and 504 of the plate 301 and the channel portions 509 and 510 of the substrate 201 can be facilitated by use of ridges 521 and 523 extending from the surfaces 341 and 342 of the plate 301 within the recess 304. The abrasive article 200 can be placed within the recess 304 until a portion of the abrasive article 200 engages the ridges 521 and 523, which ensures proper orientation between the channel portions 503, 504, 509 and 510.

[0117] During operation, the abrasive article 200 can be removably coupled with the plate by placing the abrasive article 200 within the recess 304 of a plate 301 and securing the abrasive article in place using fasteners 505 and 506. After sufficient use of the first side of abrasive grains 221, the user may unscrew the fasteners 505 and 506, inverting the abrasive article 200 exposing the second layer of abrasive grains 223, and using the fasteners to secure the position of the abrasive article 200 within the recess 304 of the plate 301.

[0118] FIG. 6 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. As illustrated, the abrasive tool 600 includes an abrasive article 200 removably coupled within a recess 304 of a plate 301. The abrasive tool 200 and plate 301 are removably coupled via a coupling mechanism that includes a latching mechanism 601. As illustrated, the latching mechanism 301 includes a latch 607 having an elongated member 609 attached to a head member 610 that can be moved within a channel 606 within the plate 301 and a complementary channel 605 that extends into the interior of the substrate 201.

[0119] The latching structure 601 further includes a biasing member 603 disposed between a surface of the plate 301 and the head member 610. The biasing member 603 can resiliently bias the latching member 607 in the position as illustrated, such that the elongated member 609 extends into the channel 606, and more particularly, extends into the complementary channel 605 to couple the plate 301 and abrasive article 200 to each other. Upon releasing the abrasive article 200 from within the recess 304, the user can manipulate the head member 610 in a direction 612 as illustrated to remove the elongated member 609 from the channel 605 of the substrate 201 thereby facilitating removal of the abrasive article from within the recess 304. Upon removal, the user can

reverse the abrasive article 200 for use of the opposite layer of abrasive grains 223. Accordingly, the substrate 201 can further include a second complementary channel 615 disposed opposite of the channel 605 configured to engage the elongated member 609 of the latching member 607. As will be appreciated, ridges or other placement members as illustrated in FIG. 5 may be used to properly orient the abrasive article 200 and the plate 301 to facilitate engagement of the latching structure 601.

[0120] FIG. 7 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. As illustrated, the abrasive tool 700 includes an abrasive article 200 configured to be removably coupled within a recess 304 of the plate 301. Unlike previous embodiments, the substrate 201 of the abrasive article 200 has a unique shape configured to be coupled within the recess 304 of the plate 301. In particular, the substrate 201 includes angled surfaces 703 and 701 which are configured to engage the angled surface 702 of the recess 301. The surfaces 703 and 701 are angled with respect to the upper major surface 202 and lower major surface 204 of the substrate 201 such that angles 721 and 722 are formed between the two surfaces. In particular, the angles 721 and 722 can be obtuse angles ($>90^\circ$) that facilitate centering of the abrasive article 200 within the recess 304 and can also allow for a gap 707 between the side surfaces 341 and 342 and the bonding layer 205 and layer of abrasive grains 223. The gap 707 reduces likelihood of damage to the layer of abrasive grains 223 during coupling of the plate 301 and abrasive article 200.

[0121] As illustrated, the plate 301 and the abrasive article 200 are removably coupled via a coupling mechanism 709 that includes engagement structures (i.e., protrusions) 741 and 742 extending laterally from the substrate 201 that are configured to engage a complementary coupling surface 743 of the plate 301. In one embodiment, the abrasive article 200 can be removably coupled with the plate 301 by placing the abrasive article 200 within the recess until the surface 701 engages the surface 702. Upon placement of the abrasive article 200 within the recess, the abrasive article can be rotated until the engagement structures engage the complementary coupling surface 743 and the substrate 201 and plate 301 are secured against each other, such as in a rotate-and-lock coupling arrangement.

[0122] The abrasive tool 700 can further include a sealing layer 715 disposed between surfaces of the substrate 201 and plate 301. The sealing layer 715 facilitates sealing of the connection between the substrate 201 and plate 301 from penetration by CMP liquids and debris. In one particular embodiment, the sealing layer 715 can include a polymer material that may be easily removed after use of the abrasive article. For example, the sealing layer 715 can be a silicone or low temperature polymer than can be removed or softened via heat treatment to facilitate removal of the abrasive article 200 from the plate 301.

[0123] FIG. 8 includes a cross-sectional view of an abrasive tool in accordance with an embodiment. The abrasive tool 800 includes an abrasive article 200 removably coupled with a plate 830, wherein the plate 830 comprises a first fixture 801 and a second fixture 803 and the abrasive tool 800 is coupled to the plate 830 within the recess 834. Generally herein, the plate can include separate members that can be removably coupled to each other via coupling mechanisms such as, magnetic means, pressurized means, electronic coupling means, mechanical means, and a combination thereof. Cer-

tain mechanical means can include fasteners, latches, clamps, locks, biasing members, the like, and a combination thereof.

[0124] According to the abrasive tool **800** of FIG. **8**, the first fixture **801** can be a generally planar member. The first fixture **801** can be made of the same materials as the plate **301** described in other embodiments. For certain designs, openings **805** and **806** can be present within the body of the first fixture **801**, which can extend axially through a portion of the body. In particular, the openings **805** and **806** can extend through the entire thickness of the first fixture **801** for engagement of fasteners **809** and **810** therein.

[0125] According to one embodiment, the first fixture **801** can include a biasing member **811** attached to the upper surface **831** of the first fixture **801**. The biasing member **811** can extend from the upper surface **831** and is configured to engage portions of the substrate **201**, such as the engagement members **827** and **828** to resiliently bias the position of the abrasive article **200** within the recess **834**. Additionally, the biasing member **811** can be coupled to the engagement members **827** and **828** upon assembly of the abrasive tool **800** such that the abrasive article **200** can be clamped between portion of the biasing member **811** and a portion of the second fixture **803**. Such a design can reduce the likelihood of damage to the abrasive article **200** and improve conditioning performance. According to one particular embodiment, the biasing member **811** can have an annular shape.

[0126] Suitable materials for use in the biasing member **811** can include metals, ceramics, polymers, or a combination thereof. In certain embodiments, the biasing member **811** can include a metal spring or the like. According to other embodiments, the biasing member **811** can include a polymer material, and the like. Additionally, the biasing member **811** can be a solid material that is a monolithic piece, such as a foam material or elastomer material. It will be appreciated that the engagement structures **827** and **828** are different structures, however in other designs, the substrate may include a single engagement structure extending around the entire periphery of the side surface of the substrate **201**.

[0127] The first fixture **801** and the second fixture **803** can be coupled by fasteners **809** and **810**. Accordingly, the second fixture **801** can include openings **807** and **808** configured to align with the openings **805** and **806** within the first fixture **801** to accept and engage the threaded portions of the fasteners **809** and **810**.

[0128] As further illustrated, the body of the second fixture **803** can include a ridge **850** extending in a direction perpendicular to the body of the second fixture **803** and configured to engage the side surface of the substrate **201**. The ridge **850** can extend circumferentially around the inner surface of the second fixture **803** to facilitate clamping the second fixture **803** and the first fixture **801** against the engagement members **827** and **828** of the substrate to secure the abrasive article **200** in the recess **834**.

[0129] The second fixture **803** can further include a sealing member **813** disposed on an interior surface **815** of the ridge **850**. The sealing member can be disposed in this position to inhibit debris and conditioning fluids from entering the recess **834** and interfering with the operation of the abrasive tool **800**. In one particular embodiment, the sealing member **815** is fixedly attached to the interior surface **815** such that it is properly placed during assembly of the abrasive tool **800**. The sealing member **815** can include those features of the sealing members described in accordance with other embodiments herein.

[0130] During assembly of the abrasive tool **800**, the abrasive article **200** can be placed over the first fixture **801** such that the engagement structures **827** and **828** engage the biasing member **811**. The second fixture **803** can then be placed such that the ridge **850** is overlying the engagement structures **827** and **828** and the sealing member **813** is engaged with the top surface of the engagement structures **827** and **828**, such that the abrasive article **200** is clamped between the sealing member **813** and the biasing member **811**. The openings **807** and **808** of the second fixture **803** can be aligned with the openings **805** and **806** of the first fixture **801** and the fasteners can be engaged within the openings thus securing the first and second fixtures **801** and **803** together and clamping the abrasive article **200** within the recess **834**.

[0131] FIG. **9** includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive tool **900** includes an abrasive article **200** removably coupled to a plate **930**, wherein the plate comprises a first fixture **801**, a second fixture **803**, and a recess **934** formed between the first fixture and second fixture **803**. As illustrated, the abrasive tool **900** can have a similar construction as the abrasive tool **800** of FIG. **8**, however, the abrasive tool **900** includes a different coupling mechanism between the first fixture **801** and second fixture **803**. In particular, the first fixture **801** and second fixture **803** are coupled together via a coupling structure **955**, wherein the first fixture **801** and second fixture **803** can be threaded or screwed together directly. The direct threaded connection is facilitated by complementary threaded surfaces **901** on each of the first fixture **801** and second fixture **803**. Notably, while the means of engagement between the first fixture **801** and second fixture **803** differ in the abrasive tool **900** from the abrasive tool **800**, the manner of assembling the abrasive tool **900** can be substantially the same as described in accordance with the embodiment of FIG. **8**.

[0132] FIG. **10** included a cross-sectional illustration of an abrasive tool in accordance with an embodiment. Notably, the abrasive tool **1000** includes an abrasive article **200** that is removably coupled to a plate that includes a first fixture **801**, second fixture **803**, and a recess **1034** formed between the first fixture **801** and second fixture **803**. As illustrated, the abrasive tool **1000** has the same design as the abrasive tool **900** described herein, including a first fixture **801** that is coupled to a second fixture **803** via a coupling structure **955**.

[0133] The abrasive tool **1000** can include a biasing member **1005** extending from the upper surface **931** of the first fixture **801**. In particular, the biasing member **1005** can have an annular shape such that it extends circumferentially around the center point of the first fixture **801**. Moreover, the biasing member **1005** can have a chamfered surface **1015** for engagement with engagement structures **1027** and **1028** extending from the substrate **201**, which according to the illustrated embodiment, include complementary chamfered surfaces. Use of chamfered surfaces on the engagement structures **1027** and **1028** facilitates proper positioning of the abrasive article **200** within the recess **1035**. Moreover, the abrasive tool **1000** can include a member **1007** coupled to the second fixture **803** and configured to engage the engagement structures **1027** and **1028** upon assembly of the abrasive tool **900**. In particular, the member **1007** can be a pliable member capable of deformation, thus facilitating the proper placement and orientation of the abrasive article **200** within the recess **1034**. Likewise, the member **1007** can have a chamfered

surface **1016** configured to engage complementary, upper sloped surfaces of the engagement structures **1027** and **1028**.

[0134] FIG. 11 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. As illustrated, the abrasive tool **1100** includes an abrasive article **200** that is contained within a recess **1106** of a plate **1101**. Notably, the plate **1101** is a generally H-shaped member having a first arm **1103** and a second arm **1102** joined by a third arm **1104** forming a first recess **1106** and a second recess **1107** therebetween. During assembly, the abrasive article **200** can be placed within the recess **1106** by first placing sufficient pressure within the first recess **1107** to urge the arms **1103** and **1102** to move away from each other in the directions **1105** and **1108**. The application of pressure can be provided by a fluid or gas. After the arms **1102** and **1103** have been sufficiently separated in the directions **1105** and **1108**, the abrasive article **200** can be placed within the recess **1106** between the arms **1102** and **1103**, and after proper placement of the abrasive article **200**, the pressure within the recess **1107** can be changed (i.e., lessened) to urge the arms **1103** and **1102** to return to the starting position. Removal of the pressure from within the recess **1107** allows the arms **1103** and **1102** to return to their original positions, thereby clamping the abrasive article **200** in place between the arms **1103** and **1102** within the recess **1106**. To remove the abrasive article **200**, pressure can be applied within the recess **1107** to separate the arms **1103** and **1102** in the directions **1108** and **1105**.

[0135] FIG. 12A includes a cross-sectional illustration of a portion of an abrasive tool in accordance with an embodiment. Notably, the abrasive tool **1200** includes a plate **1201** and an abrasive article **1202** overlying and removably coupled to the plate **1201**. In particular, the abrasive article **1202** includes engagement structures in the form of openings **1207** and **1209** that extend axially through the entire thickness of the abrasive article **1202**. The openings **1207** and **1209** are configured to be engaged with pins **1203** and **1204** extending from an upper surface **1205** of the plate **1201**, such that the abrasive article **1202** is secured in its placement and orientation relative to the plate **1201**. The pins **1203** and **1204** can be affixed to the upper surface **1205** of the substrate **1201**, or in other designs, the pins **1203** and **1204** and substrate **1201** can be a single monolithic piece.

[0136] As further illustrated, the pins **1203** and **1204** can include upper layers **1213** and **1214** that overlie the top surfaces of the pins **1203** and **1204**. In particular, the upper layer **1213** and **1214** can be directly attached to the upper surfaces of the pins **1203** and **1204**, and more particularly, the upper layers **1213** and **1214** can be configured to be flush with the upper surface of the bonding layer **203** of the abrasive article **1202**. The upper layers **1213** and **1214** facilitate sealing the connection between the abrasive article **1202** and the pins **1203** and **1204**. Moreover, the upper layers **1213** and **1214** can be made of a soft or pliable material such that they do not interfere with a conditioning process. According to one embodiment, the upper layers **1213** and **1214** can include a polymer material.

[0137] The abrasive tool **1200** can further include magnets **1213**, **1214**, and **1215** disposed within the plate **1201** and configured to magnetically attract and couple the substrate **201** of the abrasive article **1202** to the plate **1201**. The magnets **1213-1215** can have a polarity that is suitable for attracting the substrate **1201** or other material within the abrasive article **200** to the upper surface **1205** of the plate **1201**. The

magnets **1213-1215** can be embedded within the plate **1201** such that they are completely surrounded on all sides by the material of the plate **1201**.

[0138] It will be appreciated while the abrasive tool **1200** of FIG. 12A is illustrated as including magnets **1213**, **1214**, and **1215** within the interior of the plate **1201**. In accordance with other embodiments, such magnets may be present in the abrasive article **1202**. Moreover, both the abrasive article **1202** and the plate **1201** may include magnets such that they are opposite in polarity and attract each other thereby securing the abrasive article **1202** to the plate **1201**. Moreover, it will be further appreciated that while the embodiment of FIG. 12A demonstrates magnets, any of the embodiments herein may incorporate magnetic coupling mechanisms to form abrasive tools.

[0139] In accordance with an alternative embodiment, the plate **1201** and abrasive article **1202** may be removably coupled via electrode connections, such as anodic bonding, wherein opposite charges are provided at the plate **1201** and substrate **201** to encourage coupling between the two members.

[0140] The abrasive tool **1200** is illustrated in a top view in FIG. 12B, and as described, the abrasive tool **1200** includes an abrasive article **1202** having openings **1207** and **1209** for engagement of pins **1203** and **1204** therein. Notably, the openings **1207** and **1209** within the abrasive article **1202** are spaced apart radially from a center point **1220**, and in particular, the opening **1207** within the abrasive article **1202** is spaced apart at a radial distance **1221** from the center point **1220** of the abrasive article **1202**, while the opening **1209** is spaced apart from the center point **1220** by a radial distance **1222**. Spacing of the openings **1207** and **1209** from the center point **1220** of the abrasive article **1202** facilitates locking the abrasive article **1202** on the plate **1201** such that it does not rotate during a conditioning operation.

[0141] FIG. 12C includes a top view of an abrasive tool in accordance with an embodiment. The abrasive tool **1250** includes an abrasive article **1202** which is overlying an upper surface of a plate (not shown). The abrasive article **1202** includes openings **1217** and **1219** which are spaced apart from the center point **1253** of the abrasive article **1202**. In particular, the openings **1217** and **1219** are situated at the periphery of the abrasive article **1202** such that the circumference of the abrasive article **1202** intercepts the openings **1217** and **1219**. Additionally, the openings **1217** and **1219** can be spaced at a distance from a center point **1253** and a radial distance of **1251** and **1252** as illustrated to facilitate suitable coupling between the abrasive article **1202** and the plate such that the abrasive article **1202** does not rotate or change position during a dressing operation.

[0142] FIG. 13 includes a top view illustration of an abrasive tool in accordance with an embodiment. As illustrated, the abrasive tool **1300** can include an abrasive article **1302** which can be removably coupled to a plate (not illustrated), which can be coupled to the bottom of the abrasive article via a clamp ring **1301**. The clamp ring **1301** includes a first ring portion **1303** and a second ring portion **1304** that are configured to extend around the periphery of the abrasive article **1302** and secure it to the clamp ring **1301**. The first ring portion **1303** and the second ring portion **1303** can be joined by a clamp assembly **1305** which includes a fastener **1308**. During operation, the abrasive article **1302** can be placed within the clamp ring **1301** and the first portion **1303** and second portion **1304** can be closed around the abrasive article

1302 via engagement of the fastener **1308** between a first clamp portion **1306** and a second clamp portion **1307**. In particular, engagement of the fastener **1308** with the first clamp portion **1306** and second clamp portion **1307** helps reduce space between the first and second clamp portions **1306** and **1307** and secure the abrasive article **1302** between the first ring portion **1303** and second ring portion **1305**.

[0143] FIG. 14 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive tool **1400** includes a coupling mechanism **1402** for removably coupling the abrasive article **200** with the plate **1401**. According to the illustrated embodiment, the coupling mechanism **1402** utilizes an engagement structure **1405** extending from the body of the substrate **201** which engages protrusions **1403** and **1404** within the plate **1401**. In particular, the engagement structure **1405** is a protrusion that extends laterally from the side of the substrate and configured to be engaged in a recess between the protrusions **1403** and **1404** of the plate. Moreover, the coupling mechanism **1402** further includes a fastener **1406** to facilitate coupling between the engagement structure **1405** of the substrate **201** and protrusions **1403** and **1404** of the plate **1401**. As will be appreciated, the engagement structure **1405** and protrusions **1403** and **1404** can have openings extending through them for engagement of the fastener **1406** therein. Additionally, a washer **1407** may be disposed between the fastener **1406** and a surface of the plate **1401**.

[0144] During operation, the engagement structure **1405** of the substrate **201** can be placed in between the protrusions **1403** and **1404** of the plate **1401** and upon proper alignment between the protrusions **1403**, **1404**, and **1405**, a fastener **1406** may be threaded through each of the protrusions **1403**-**1405** to removably couple the abrasive article **200** to the plate **1401**. It will be appreciated that while the abrasive tool **1400** is illustrated as having a single coupling mechanism **1402** disposed on one side of the abrasive article **200**, additional coupling mechanisms can be added to properly secure the abrasive article **200** to the plate **1401**.

[0145] The abrasive tool **1400** further includes sealing members **1418** and **1419**. In particular, the sealing members **1418** and **1419** are disposed at a position below the coupling mechanism **1402** and are attached to the plate **1401**. As further illustrated, the sealing members **1418** and **1419** are situated in a manner to engage the side surface of the abrasive article **200**, and in some designs, the sealing members **1418** and **1419** may engage the bonding layer **205** to inhibit debris and fluids from entering the recess **1435** and avoid contamination of the unused side of the abrasive article **200** and risk contamination of pads to be dressed in subsequent dressing operations. While not illustrated in the embodiment of FIG. 14, additional sealing members may be placed at particular positions between the abrasive article **200** and surfaces of the plate **1401**, such as at a location between the substrate **201** and the protrusion **1403** to inhibit debris and fluids from entering the coupling mechanism **1402**.

[0146] FIG. 15 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive tool **1500** can include an abrasive article **200** that is removably coupled to a collet member **1501**, and the collet member **1501** can be removably coupled to a plate **1510**. In accordance with one embodiment, the abrasive tool **1500** includes engagement structures **1503** and **1504** and is configured to be removably coupled to the abrasive article **200** within a recess **1514** of the collet member **1501**. The coupling

mechanisms **1503** and **1504** can include protrusions **1513** and **1514** extending from the body of the collet member **1501** and configured to engage recesses **1523** and **1524** within the substrate **201**. While the coupling mechanisms **1503** and **1504** are illustrated as including protrusions **1513** and **1514** engaged within the recesses **1523** and **1524**, it will be appreciated that any of the other coupling mechanisms described herein can be used to couple the abrasive article **200** to the collet member **1501**.

[0147] As illustrated, the collet member **1501** can include a surface **1507** that is slanted or angled with respect to the first and second major surfaces **202** and **204** of the substrate **201** and the bottom surface **1508** of the collet member **1501**. Additionally, in certain embodiments, the collet member **1501** can include an engagement structure **1516** disposed in the surface **1507** to removably couple the collet member to the plate **1510**. In particular, the collet member **1501**, and more particularly, the engagement structure **1516** can include a channel **1519** within the surface **1507** configured to engage a protrusion **1517** within the plate **1510** such that the two components can be removably coupled. In certain embodiments, the engagement structure **1516** can include a rotate-and-lock mechanism such that the protrusion **1517** of the plate **1510** can be initially engaged within the channel **1519** of the collet member **1501**, and thereafter, either the collet member **1501** or the plate **1510** can be rotated by a certain degree to lock the position of the collet member **1501** relative to the plate **1510**. It will be appreciated that the collet member **1501** is an intermediate component between the abrasive article **200** and the plate **1510**, and moreover, such a collet member **1501** may be used with any of the embodiments herein.

[0148] Moreover, the collet member **1501** can be a composite member including more than one type of material, such that certain portions of the collet member **1501** are capable of expanding and retracting around the plate **1510** at the coupling interface to facilitate a compliant and tight fit between the two components. For example, portions of the collet member **1501** can include a hard material such as a metal or metal alloy that can be coupled to a portion of the collet member **1501** that includes a softer material such as a polymer material, for example a rubber or silicone material. Notably, the portions including the softer material can include those surfaces designed to directly couple the collet member **1501** to the plate **1510**.

[0149] FIG. 16 includes a top view illustration of an abrasive tool in accordance with an embodiment. As illustrated, the abrasive tool **1600** includes an abrasive article **1602** which includes a substrate **1603** and layer of abrasive grains **1621** overlying the substrate **1603**. In certain designs, the substrate **1603** can have a generally polygonal shape including sides and corners, while the layer of abrasive grain **1621** are oriented on the surface in a shape that is different than the general shape of the substrate **1603**. For example, as presented in the embodiment of FIG. 16, the layer of abrasive grains are present on the surface of the substrate **1603** in a generally circular pattern. In particular, the shape of the substrate **1603** such that it incorporates sides and corners facilitates easier coupling of the substrate **1603** with a plate (not illustrated) for removable coupling the abrasive article **1602** with a plate.

[0150] FIG. 17 includes a top view illustration of an abrasive tool in accordance with an embodiment. The abrasive tool **1700** includes a plate **1701** that is removably coupled to an abrasive article **1702**. In particular, the plate **1701** can have

a contour as viewed from the top (as opposed to a cross-sectional contour as viewed through a portion of the plate body) that is significantly different than a contour of the abrasive article 1702. For example, according to the illustrated embodiment of FIG. 17, the plate 1701 can have a generally circular contour as viewed from the top while the abrasive article 1702. However, the abrasive article 1702 has a contour that includes an arcuate portion 1705 defining a portion of the periphery and further includes a flat portion 1703 that defines a portion of the periphery. In particular, the arcuate portion 1705 can have a generally semi-circular shape such that it extends through at least 180° of the periphery. Notably, the flat 1703 provides corners and a side that facilitates securing the position and the orientation of the removable abrasive article 1702 within the plate 1701 such that the abrasive article 1702 does not rotate or shift during a dressing operation.

[0151] FIG. 18 includes a top view illustration of an abrasive tool in accordance with an embodiment. The abrasive tool 1800 includes an abrasive article 1802 removably coupled with the plate 1801. In particular, the abrasive article 1802 includes openings 1803 and 1804 that can extend through the layer of abrasive grains and bonding layer into the interior of the body of the substrate. The openings 1803 and 1804 can be used for removably coupling the abrasive article 1802 with the plate 1801. For example, according to one embodiment, the openings 1803 and 1804 can provide key hole openings for a tool that is designed to engage the abrasive article 1802 within the openings 1803 and 1804 and aid gripping and removal of the abrasive article 1802 from the plate 1801. For example, in one embodiment a keyed tool can include a handle and complementary protrusions configured to engage the abrasive article 1802 within the openings 1803 and 1804. In particular instances, the keyed tool can be used to rotate the abrasive article 1802 relative to the plate 1801 thereby removing the abrasive article 1802 from the plate 1801. In alternative designs, the abrasive article 1802 and plate can be removably coupled via magnetic attraction, and the keyed tool can include a complementary protrusions configured to engage the abrasive article 1802 within the openings 1803 and 1804 and further include a magnet configured to attract the abrasive article 1802 and effectively decouple the abrasive article 1802 from the plate 1801.

[0152] FIG. 19 includes a top view illustration of an abrasive tool in accordance with an embodiment. The abrasive tool 1900 includes a plate 1901 that includes a plurality of abrasive articles 1912, 1913, 1914, 1915 (1912-1915) oriented in a particular arrangement on the surface of the plate 1901. As illustrated, the abrasive articles 1912-1915 can each have a unique shape different from each other to form a pattern on the surface of the plate 1901. Additionally, the abrasive tool 1900 includes channels 1903 and 1904 separating the abrasive articles 1912-1915. The channels 1903 and 1904 formed on the surface of the abrasive tool 1900 may facilitate removal of swarf and other debris during a CMP dressing operation. It will be appreciated that each of the abrasive articles 1912-1915 have a unique shape and are configured to be removably coupled with the plate 1901.

[0153] FIG. 20 includes a top view illustration of an abrasive tool in accordance with an embodiment. The abrasive tool 2000 includes a plate 2001 and an abrasive article 2002 removably coupled to the plate 2001. Like the other embodiments herein, the abrasive article 2002 is reversible having a substrate including a layer of abrasive grains on a first major

surface and second major surface opposite the first. In particular, the coupling mechanism for removably coupling the abrasive article 2002 to the plate 2001 includes a series of maneuverable jaws 2005, 2006, 2007, and 2008 (2005-2008). According to one embodiment, the maneuverable jaws 2005-2008 can be moved to engage and clamp the abrasive article 2002 on the surface of the plate 2001. The maneuverable jaws 2005-2008 can be actuated using different mechanisms, including for example mechanical means, such as a turn, screw, crank, wedge, slide, or the like. The maneuverable jaws 2005-2008 can be operated individually or together for proper positioning of the abrasive article 2002 on the plate 2001.

[0154] In one particular embodiment, the maneuverable jaws 2005-2008 can be moved in the directions indicated by the arrows 2013, 2014, 2015, and 2016, that is, in generally inward and outward radial directions with respect to the center of the plate, to engage the abrasive article 2002. In certain designs, the maneuverable jaws 2005-2008 can be moved by rotating the plate 2001 (or the maneuverable jaws 2005-2008 relative to the plate 2001) in the direction as indicated by arrow 2020. Accordingly, the plate 2001 may include ridges or grooves, particularly spiral ridges or grooves, along its upper surface for coupling and moving the maneuverable jaws 2005-2008 relative to the surface of the plate 2001. For example, rotation of the plate 2001 in a clockwise direction may facilitate moving the maneuverable jaws 2005-2008 in a radially inward direction (toward the center of the plate 2001) to engage the abrasive article 2002. While rotation of the plate 2001 in an opposite direction may facilitate moving the maneuverable jaws 2005-2008 in a radially outward direction.

[0155] During use of the abrasive tool 2000, a user can place the abrasive article 2002 on the plate 2001 and rotate the plate or a portion of the plate (e.g., an upper portion of the plate) in a clockwise manner until the maneuverable jaws 2005-2008 are moved radially inward and engage the abrasive article 2002. After sufficient use of the abrasive article 2002, a user can remove the abrasive article 2002 by rotating the plate in an opposite direction (i.e., counter-clockwise direction) to move the maneuverable jaws 2005-2008 in a radially outward direction thus disengaging the abrasive article 2002 for removal from the plate 2001.

[0156] Additionally, the abrasive tool 2000 can include sealing members 2009, 2010, 2011, and 2012 (2009-2012). In accordance with one embodiment, the position of the sealing members 2009-2012 are fixed on the surface of the plate 2001 thereby facilitating initial placement of the abrasive article 2002 relative to the plate 2001. Moreover, during movement of the maneuverable jaws 2005-2008 in a radially inward direction, the sealing members 2009-2012 can be disposed between each of the arms 2005-2008 facilitating sealing between the maneuverable jaws 2005-2008, the abrasive article 2002, and the plate 2001. In other embodiments, the sealing members 2009-2012 can be fixably attached to the ends of certain the maneuverable jaws 2005-2008 and move radially with the maneuverable jaws 2005-2008.

[0157] FIG. 21 includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive tool 2100 includes an abrasive article 2102 that is removably coupled within a recess 2134 of a plate 2101. The abrasive article 2102 can be removably coupled within the recessed 2134 via a coupling mechanism 2103. The coupling mechanism 2103 can include a fastener 2107 that is config-

ured to be engaged within an opening **2106** of the body of the plate **2101** and correspondingly engaged within an opening **2105** extending into a portion of the substrate **2108** of the abrasive article **2102**. According to the embodiment of FIG. **21**, the fastener **2107** can extend laterally through a portion of the plate **2101** and substrate **2108** to facilitate locking the position of the abrasive article **2102** relative to the plate **2101**. It will be appreciated that more than one fastener **2107** can be used to removably couple the abrasive article **2102** and the plate **2101**. Moreover, while not illustrated, one or more sealing members can be disposed between the abrasive article **2102** and the plate **2101**, such as between the substrate **2108** and an inner surface of the plate **2101** to reduce the likelihood of debris and fluid from entering the recess **2134**. In alternative designs, ridges or other placement members (See, for example, ridges **521** and **523** of FIG. **5**) may be provided within the recess to aid proper placement of the abrasive article **2102** relative to the plate **2101** to facilitate alignment of the openings **2106** and **2105** and engagement of the fastener **2107** therein. It will further be appreciated that while a fastener **2107** is illustrated, other fastening mechanisms such as Allen bolts, nuts, pins, and the like can be used.

[**0158**] FIG. **22** includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive tool **2200** includes an abrasive article **2202** removably coupled to a plate **2201**. The plate **2201** can include magnet **2209** within the body of the plate **2201**, which facilitates coupling between the abrasive article **2202** and the plate **2201**. The magnet **2209** can have a polarity and strength sufficient to attract the abrasive article **2202**, particularly the substrate **2208** of the abrasive article **2202**, wherein the substrate **2202** can include a material capable of being magnetically attracted to the magnet **2209**, such as a metal or metal alloy. In particular embodiments, the magnet **2209** is oriented at the bottom surface of the plate **2201**, such that it is not surrounded on all sides by the body of the plate **2201** and is accessible from the back surface **2255** of the plate **2201**. This may facilitate removal of the magnet **2209** for maintenance or replacement. Additionally, placement of the magnet **2209** at the back surface **2255** of the plate **2201** can provide adequate distance between the magnet **2209** and the substrate **2208** for coupling. Additionally, the position of the magnet **2209** can provide suitable spacing distance for removal of the abrasive article **2202** from the plate **2201** via a removal magnet (not shown) that can more closely engage and more strongly magnetically attract the substrate **2208**, for decoupling of the abrasive article **2202** from the plate **2201**.

[**0159**] As further illustrated, the substrate **2208** can have a unique shape, including surfaces **2233** and **2234** that are angled with respect to the upper and lower major surfaces **2223** and **2225** of the substrate **2208**, respectively. The angled surfaces **2233** and **2234** provide a unique shape for complementary engagement with the angled surface **2244** of the substrate. Moreover, the angled surfaces **2233** and **2234** aid effective engagement between the abrasive article **2202** and a sealing member **2207** disposed between the plate **2201** and the abrasive article **2202**. The sealing member **2207** can be a pliable film overlying a surface of the plate **2201** within the recess that is configured to be compressed and deformed upon coupling between the abrasive article **2202** and plate **2201**. As will be appreciated, the sealing member **2207** can be a polymer material, or composite material incorporating a polymer material.

[**0160**] In accordance with one particular embodiment, the upper and lower major surfaces **2223** and **2225** of the substrate **2208** can include recesses wherein the bonding layers **2213** and **2215** are disposed, respectively. The recesses in the upper and lower major surfaces **2223** and **2225** provide an abrasive article incorporating bonding layers **2213** and **2215** that are secured with greater mechanical force to the substrate **2208** and also provides an abrasive article comprising a smoother profile, with less corners exposed for suitable coupling within the recess **2221** of the plate **2201** to avoid damage to the bonding layers **2213** and **2215** and abrasive grains contained therein.

[**0161**] FIG. **23** includes a cross-sectional illustration of an abrasive tool in accordance with an embodiment. The abrasive tool **2300** includes an abrasive article **2301** that is removably coupled to a plate **2302**. Notably, the abrasive article **2302** includes a reversible abrasive article as described in accordance with other embodiments, incorporating first and second layers of abrasive grains on opposing first and second major surfaces of a substrate **2308**. The abrasive article **2301** can be coupled within a recess **2334** of the plate **2303**. In particular, the plate **2303** has a unique shape including first and second arms **2310** and **2311** on either side of the recess **2334** and a recess **2307** formed in a back surface **2366** of the plate. The recess **2307** includes a back surface **2308** and openings **2309** extending from the back surface of the recess **2307** through the body of the plate **2302** to a bottom surface **2313** of the recess **2334**. Such a design can facilitate a pressurized coupling mechanism, wherein a reduced pressure atmosphere is provided within the recess **2307** thereby creating a pressure differential or suction force sufficient to hold the abrasive article **2302** within the recess **2334** of the plate **2302**. The reduced pressure atmosphere within the recess **2307** can be provided by use of a vacuum pump that is suitably positioned and sealed with respect to the back surface **2366** of the plate **2302**.

[**0162**] As further illustrate, the abrasive tool **2300** can further include a sealing member **2305** disposed along an inner surface of the plate **2302** within the recess **2334** and configured to engage the abrasive article **2301**. In particular embodiments, the sealing member **2305** can include a ridge **2306** that protrudes from the body of the sealing member **2305** in a lateral direction into the recess **2334**, such that it is configured to engage the bonding layer **2322** of the abrasive article **2301**. The sealing member **2305** can reduce the penetration of debris and fluids from entering the recess **2334**. The ridge **2306** of the sealing member **2305** can further aid proper placement of the abrasive article **2301** within the recess **2334**, such that the bonding layer **2322** is properly spaced from the bottom surface **2313** of the recess **2334** to avoid damaging the layer of abrasive grains and facilitate formation of an adequate pressurized force to hold the abrasive article **2301** within the recess **2334**.

[**0163**] FIGS. **24A-24D** include illustrations of a method of using an abrasive article for conducting a CMP pad conditioning operation in accordance with an embodiment. In particular, the following figures demonstrate the reversible nature of the abrasive article, and the coupling arrangement between the abrasive article, the plate, and a holder.

[**0164**] FIG. **24A** includes a cross-sectional illustration of a holder, a plate, and an abrasive article in accordance with an embodiment. In particular, the abrasive article **2403** is formed according to the embodiments herein, including a first abrasive surface **2404** and a second abrasive surface **2405** on the

first and second major surfaces of a substrate, respectively. The first and second abrasive surfaces **2404** and **2405** can include abrasive texture or a combination of bonding layer and abrasive grains as described in accordance with the embodiments herein.

[0165] The holder **2401** can include a substrate, typically made of a metal or metal alloy material, and having openings **2422** and **2423** extending axially through the thickness of the body for engagement of fasteners **2431** and **2432** therein. The plate **2402** can be disposed between the holder **2401** and the abrasive article **2403** and can include complementary openings **2424** and **2425** extending from a rear surface for engagement of portions of the fasteners **2431** and **2432** therein to directly couple the plate **2402** to the holder **2401**. By contrast, in conventional designs, the holder **2401** is based on a manufacturer's standard design, typically integrated with a particular dressing machine, and the fasteners **2431** and **2432** are a common industry standard used to directly affix a pad conditioner to the holder **2401**. The abrasive article **2403** can be removably coupled to the plate **2402**, such that a first abrasive surface **2404** is configured to be exposed and ready to condition a CMP pad. The second abrasive surface **2405** can be located at a surface of the plate **2402** or within the plate **2402**, such as contained within a recess of the plate **2402** as described herein.

[0166] The holder **2401**, plate **2402**, and abrasive article **2403** can be combined to form an abrasive assembly **2409** that is attached to a CMP tool. FIG. 24B includes a schematic of a CMP tool in accordance with an embodiment. As illustrated, the CMP tool includes a dressing machine **2410** that can include electronic and mechanical systems suitable for conducting the CMP pad dressing processes.

[0167] The abrasive assembly **2409** can be coupled to the dressing machine **2410** in a manner such that the first abrasive surface **2404** is exposed and configured to contact and dress the CMP pad **2411**. During operation, the first abrasive surface **2404** is contacted to a surface of the CMP pad **2411**, which can be moved relative to the first abrasive surface **2404**, and oftentimes, both the CMP pad **2411** and abrasive assembly **2409** are moved relative to each other to achieve suitable conditioning of the CMP pad **2411**. Movement of the first abrasive surface **2404** and CMP pad **2411** can be a rotational motion, such that the CMP pad is rotated as illustrated about one axis **2431** and the abrasive assembly **2409** is rotated about a different axis **2436**, as illustrated. The CMP pad **2411** and abrasive assembly **2409** may be rotated in the same or different directions. Such a process may be conducted regularly and repetitively for one or more CMP pads, until the expected conditioning lifetime of the first abrasive surface **2404** is exhausted. A user may record or track the amount of use or the wear status of the first abrasive surface **2404** using indicia provided on the substrate or by other means described herein.

[0168] During conventional conditioning processes, after the dresser has been thoroughly used and exhausted to its expected conditioning lifetime, the dresser is removed and discarded. However, according to embodiments herein, the abrasive article **2403** can be removed from the plate **2402**, inverted such that the second abrasive surface is exposed, and a subsequent conditioning process may continue using the same abrasive article **2403**.

[0169] Referring to FIG. 24C, the holder **2401**, plate **2402**, and abrasive article **2403** are illustrated again. Notably, after thorough use of the first abrasive surface **2404**, the abrasive article can be removed from the plate **2402**, inverted as illus-

trated, and coupled again to the plate **2402**. In this fashion, the second abrasive surface **2405** is exposed, while the first abrasive surface **2404** is unexposed, and the same abrasive article **2403** forms a different abrasive assembly **2415** that is ready for a second, subsequent conditioning procedure. In particular embodiments, inverting the abrasive article can include the removal of only the abrasive article **2403** from the plate **2402**, while the plate **2402** and the holder **2401** remain coupled to the dressing machine **2410**, which facilitates rapid and repetitive conditioning without significant interruptions to the CMP process.

[0170] As illustrated in FIG. 24D, the abrasive assembly **2415** can be coupled to the dressing machine **2401** such that the second abrasive surface **2405** is exposed and configured to contact and condition a CMP pad **2441**. The CMP pad **2441** can be the same pad as CMP pad **2411**, however, because the life of the conditioners typically exceeds that of a single CMP pad, the CMP pads **2411** and **2441** are likely different. Conditioning operations can be completed using the second abrasive surface **2405** in the same manner as used for the first abrasive surface **2404**, particularly including the movement of the CMP pad **2441** relative to the second abrasive surface **2405**.

[0171] The following description provides additional details of particular abrasive articles including CMP pad conditioners, plates, and holders. The embodiments described in the following provide additional features facilitating removable coupling between the plate and the CMP pad conditioner aiding the use of a reversible CMP pad conditioner. It will be appreciated that the embodiments described in the following include features that can be used in combination with any features of the abrasive articles described herein.

[0172] FIG. 25A includes a top view of a backside of a plate in accordance with an embodiment. As illustrated, the plate **2501** has a generally circular contour and can have a generally cylindrical three-dimensional shape. The plate **2501** can include a plurality of openings extending axially inward into the body of the plate **2501**. The openings may serve to aid coupling of the plate **2501** with other objects that are part of the CMP conditioning process, including for example, a holder. As described herein, a holder may be part of a standard tool used in the industry to affix CMP pad conditioners thereto for operation with a polishing machine.

[0173] As illustrated, the plate **2501** can include a central opening **2503** extending into the body of the plate **2501**. In particular instances, the opening **2503** can be positioned at the center of the body of the plate **2501** such that it encompasses and is centered about a center point of the plate **2501**. Moreover, the opening **2503** can be formed such that it extends completely through the thickness of the body of the plate **2501** such that it may extend completely between an upper surface and lower surface of the body of the plate **2501**. The opening **2503** may facilitate removal of a CMP pad conditioner from the plate **2501**. In particular, the opening **2503** can provide access for a device or tool to extend through the central opening **2503** from the back surface of the plate **2501** to engage the back surface of the CMP pad conditioner contained within the plate **2501**. The tool may be used to engage and urge the CMP pad conditioner from the plate **2501**. This will be described in more detail in the following embodiments.

[0174] The plate **2501** can further include openings **2507** and **2508** that can be radially spaced apart from a center of the body of the plate **2501** and positioned on opposite sides of the

central opening **2503** from each other. Notably, the openings **2507** and **2508** may be circumferentially spaced apart from each other through an angle of approximately 180 degrees. Such openings **2507** and **2508** may be used to removably couple the plate **2501** with a holder. The openings **2507** and **2508** may contain features configured to be used with fasteners, including for example, threaded surfaces configured for use with a threaded fastener.

[0175] The plate **2501** can further include openings **2505** and **2506** that can be radially spaced apart from the central opening **2503** and positioned on opposite sides of the central opening **2503** from each other. The openings **2505** and **2506** may be circumferentially spaced apart from each other by a particular angle. According to the illustrated embodiment, the openings **2505** and **2506** can be circumferentially spaced apart from each other by an angle of approximately 180°. The openings **2505** and **2506** may be used for coupling of the plate **2501** to a holder, and in particular designs can be formed to have may features configured to be used with fasteners. That is, the openings **2505** and **2506** may have threaded surfaces configured for engagement with fasteners therein to couple the plate **2501** to a holder.

[0176] The plate **2501** can also include openings **2509**, **2510** and **2511**, each of which are radially spaced apart from the central opening **2503**. Additionally, the openings **2509**, **2510**, and **2511** can be positioned within the plate such that they are circumferentially spaced apart from each other. For example, the openings **2509-2511** can be circumferentially spaced apart from each other such that each are separated by a certain angle, such as approximately 120°. The openings **2509-2511** can be used for coupling of the plate **2501** to a holder, and may contain features suitable for coupling the plate **2501** and holder, such as threaded surfaces for engagement of threaded fasteners therein.

[0177] While the plate **2501** can include a plurality of openings, which may be used for coupling of the plate **2501** to a holder, it will be appreciated that not all of the openings may necessarily be used at once for coupling the plate **2501** to other objects, such as a holder. That is, the plate **2501** includes a plurality of openings, each of which are particularly positioned on the plate **2501** such that the plate **2501** can be coupled to various types of holders, wherein different industrial machines may have different styles of holders and thus utilize different configurations of fastening mechanisms. For example, certain holders may utilize three fasteners, in which case, the openings **2509-2511** of the plate **2501** may suffice for coupling of the plate **2501** with the holder. In other instances, certain holders may utilize two fasteners, in which case, the openings **2505** and **2506**, or alternatively **2507** and **2508** may be used to couple the plate **2501** with the holder.

[0178] FIG. 25B includes a cross-sectional illustration of the plate of FIG. 25A as viewed through along a plane defined by the axis **2512** in accordance with an embodiment. As illustrated, the plate **2501** includes openings **2506**, **2508**, **2503**, **2507**, and **2505** as described in FIG. 25A. The openings **2505**, **2506**, **2507**, and **2508** can extend from a rear surface **2514** of the plate **2501** and extend axially along the axial axis **2519** into the body of the plate **2501**. Notably, the openings **2505-2508** may not necessarily extend through the full thickness of the body of the plate **2501** from the rear surface **2514** to the upper surface **2513**. That is, the openings **2505-2508** may extend for a discrete fraction of the total thickness of the body of the plate **2501**. In particular, the openings **2505-2508** can be spaced apart from a bottom surface **2518** of a cavity

2590 formed in the upper surface **2513** of the body of the plate **2501**. As such, in particular embodiments the openings **2505-2508** can be axially spaced apart from, and disconnected from the cavity **2590** formed in the upper surface **2513** of the body of the plate **2501**. This design can assure that fasteners engaged within the openings **2505-2508** may not extend through the body of the plate **2501** to engage objects contained within the cavity **2590**.

[0179] The central opening **2503** can extend through the entire thickness of the body of the plate **2501**. That is, the central opening **2503** can extend from a rear surface **2514** and intersect the bottom surface **2518** of the cavity **2590** formed in the upper surface **2513** of the body of the plate **2501**. As such, the central opening **2503** can extend through the entire thickness of the body of the plate **2501** such that the central opening **2503** and cavity **2508** are connected and the central opening **2503** can provide access to the cavity **2508** from the rear surface **2514** of the plate **2501**.

[0180] The plate **2501** can be formed such that it includes the cavity **2590** formed in the upper surface **2513** of the body of the plate **2501** configured to contain the CMP pad conditioner therein for coupling the CMP pad conditioner and plate during conditioning operations. The cavity **2590** can extend axially inward into the body of the plate **2501**. Moreover, it will be appreciated that the cavity **2590** can define a generally circular opening within the upper surface **2513** of the plate **2501** as viewed in a top down view.

[0181] The cavity **2590** of FIG. 25B is particularly shaped according to one embodiment. In particular, the cavity **2590** can include cavity portions. Each of the cavity portions can be defined by different surfaces within the cavity **2590** and may be shaped to contain different components of the abrasive tool. For example, the cavity **2590** can include a first cavity portion **2515** that can be a region defined by the surface **2591** extending along the axial axis **2519** generally perpendicular to the upper surface **2513** of the plate **2501**, and a surface **2517** extending generally perpendicular to the axial axis **2519** and the surface **2591**. Notably, the combination of surfaces **2591** and **2517** can form a step or shelf within the body of the plate **2501** and therein defining the first cavity portion **2515** extending axially into the body of the plate **2501**.

[0182] Additionally, the cavity **2590** can include a second cavity portion **2516**, which can be connected to and contiguous with the first cavity portion **2515**. The second cavity portion **2516** can be defined by a surface **2520** extending generally parallel to the axial axis **2519** and connected to the surface **2517**. Moreover, the second cavity portion **2516** can be defined by a bottom surface **2518** extending generally perpendicular to the axial axis **2519**, which may intersect the surfaces of the central opening **2503**. As illustrated, the second cavity portion **2516** can have a smaller width (e.g. diameter) as compared to the first cavity portion **2515**. Such a design may facilitate placement of certain objects within the second cavity portion **2516** separate from objects to be contained within the first cavity portion **2515**. For example, the abrasive tool can be formed such that an abrasive article (e.g., a CMP pad conditioner) can be contained within the first cavity portion **2515** while another object can be contained with the second cavity portion **2516**, such as a pad.

[0183] While the embodiment of FIG. 25B has illustrated a cavity **2590** including cavity portions defined by different surfaces within the cavity **2590**, in other designs, the cavity may be a simple recess defined by a bottom surface connected

to side surfaces. That is, certain embodiments, may not necessarily employ a cavity having distinct cavity portions.

[0184] FIG. 25C includes a cross-sectional illustration of a CMP pad conditioner in accordance with an embodiment. The CMP pad conditioner 2521 can include those features as described in previous embodiments. Moreover, the CMP pad conditioner 2521 can have a first major surface 2523 extending parallel to the lateral or radial axis 2524. The first major surface 2523 can have an abrasive texture as described in accordance with embodiments herein. Additionally, the CMP pad conditioner 2521 can include a second major surface 2524 parallel to the lateral axis 2524 and the first major surface 2523. The second major surface 2524 can include abrasive texture as described in accordance with embodiments herein. As such, the abrasive article can be a CMP pad conditioner 2521 having abrasive texture on the first major surface 2523 and the second major surface 2524 such that the CMP pad conditioner 2521 can be reversed during operation and both first major surface 2523 and second major surface 2524 may be used for conditioning operations.

[0185] As further illustrated, the CMP pad conditioner 2521 can include a side region 2527 extending between the first major surface 2523 and second major surface 2524. Notably, the side region 2527 can include a plurality of surfaces which can define an engagement structure aiding coupling between the CMP pad conditioner 2521 to a plate. In particular, the CMP pad conditioner 2521 can include a side region 2527 having a tapered surface 2522. The tapered surface 2522 can be connected to the first major surface and extend at an angle to the first major surface 2523 and at an angle to the lateral axis 2524 of the CMP pad conditioner 2521. In particular, the tapered surface 2522 can extend at a taper angle 2526 which can be at least about 1°. In other instances, the taper angle 2526 can be greater, such as at least about 5°, such as at least about 8°, or even at least about 10°. In certain instances, the CMP pad conditioner 2521 is formed such that the taper angle 2526 defined between the tapered surface 2522 and the first major surface 2523 can be within a range between about 1° and about 25°, such as between about 5° and about 20°, such as between about 8° and about 15°.

[0186] As further illustrated and according to embodiments herein, the CMP pad conditioner 2521 can include a plurality of tapered surfaces, each of which can extend between one of the major surfaces and a side surface at the side region 2527. The tapered surfaces of the CMP pad conditioner aid proper placement and clearance of the CMP pad conditioner 2521 within the plate 2501 and reduce sharp angles, which may damage a pad during a conditioning operation.

[0187] FIGS. 25D-25G include illustrations of side regions of different CMP pad conditioners in accordance with embodiments herein. The following embodiments provide illustrations of different side region designs employing different types, number, and orientations of side surfaces making up the side regions. In particular, the side regions can include a plurality of surfaces configured to engage a sealing member for use with the abrasive tool. It will be appreciated that the features of the following embodiments can extend around an entire periphery (e.g., a circumference) of a CMP pad conditioner between and connecting the major surfaces of the CMP pad conditioner.

[0188] FIG. 25D includes an illustration of a side region of a CMP pad conditioner in accordance with an embodiment. The side region 2527 includes tapered surfaces 2522 and 2529 that extend at angles relative to the lateral axis 2524. As

further illustrated, the side region 2527 can include a groove 2528 formed by a plurality of distinct side surfaces, and particularly surfaces 2531, 2532, and 2533. The surfaces 2531 and 2532 can be curvilinear surfaces extending from the tapered surfaces 2522 and 2529, respectively. The surface 2533 extends between and connects the surfaces 2531 and 2532, and can have a particularly curved surface for complimentary engagement of a sealing member therein. According to certain designs, the surface 2533 can have a concave shape that extends axially inward into the body of the CMP pad conditioner 2521. Notably, the surfaces 2531, 2532, and 2533 form a groove absent sharp corners, which may be particularly suitable for containing pliable members, such as a sealing member, without damaging the sealing member.

[0189] FIG. 25E includes a cross-sectional illustration of a portion of a side region of a CMP pad conditioner in accordance with an embodiment. In particular, the side region 2534 includes tapered surfaces 2522 and 2529 as described in accordance with embodiments herein. Additionally, the side region 2534 includes a groove 2528 connected to and extending between the tapered surfaces 2522 and 2529 at the side region 2534 of the CMP pad conditioner. The groove 2528 can be a generally concave shape extending radially inward into the body of the CMP pad conditioner. In certain instances, the groove 2528 can be defined by surfaces 2535, 2536, 2537, 2538, and 2539. In particular, the surfaces 2535-2539 are generally linear surfaces extending parallel or perpendicular to each other and forming right angles with each other. As a result, in the particular illustrated embodiment of FIG. 25E, the groove 2528 can have a generally rectilinear shape. That is, the surfaces 2535 and 2536 extend generally perpendicular to the lateral axis 2524 and are connected to surfaces 2538 and 2539, which can extend at a perpendicular angle to the surfaces 2535 and 2536, parallel to the lateral axis 2524. Moreover, the surface 2537 can extend between the surfaces 2538 and 2539 in a direction perpendicular to the lateral axis 2524 to form the inner most surface of the groove 2528.

[0190] FIG. 25F includes a cross-sectional illustration of a side region of a CMP pad conditioner in accordance with an embodiment. As illustrated, the side region 2540 can include tapered surfaces 2522 and 2529 as described in accordance with embodiments herein. Additionally, the side region 2540 can include a groove 2528 formed by a combination of surfaces including surface 2541, surface 2542, and surface 2543. The groove 2528 can have a concave portion that extends radially inward into the body of the CMP pad conditioner. The surface 2541 can be connected to the tapered surface 2522 and have a curvilinear shape, particularly a convex shape that extends radially outward from the body of the CMP pad conditioner. The surface 2541 can be connected to the surface 2543. The surface 2543 can be connected to the surface 2542, which like the surface 2541 can have a curvilinear surface that extends radially outward from the body of the CMP pad conditioner. Surface 2542 can be connected to the tapered surface 2529. As illustrated, in accordance with the embodiment of FIG. 25F, the groove 2528 has a curvilinear contour defined by surfaces 2541, 2542, and 2543, but the volume of the groove 2528 is less than the grooves illustrated in the embodiments of FIGS. 25D and 25E.

[0191] FIG. 25G includes a cross-sectional illustration of a side region of a CMP pad conditioner in accordance with an embodiment. The side region 2545 includes tapered surfaces 2522 and 2529 as described in accordance with embodiments

herein. Additionally, the side region **2545** can include a groove **2528** having a generally linear contour defined by linear surfaces **2546**, **2546**, **2548**, and **2549**. As illustrated, the surfaces **2546** and **2547** can extend at a generally perpendicular angle to the lateral axis **2524** from respective tapered surfaces **2522** and **2529**. The surfaces **2548** and **2549** can be connected to surfaces **2546** and **2547**, respectively. The surfaces **2548** and **2549** can define a groove **2528** extending radially inward into the body of the CMP pad conditioner. The surfaces **2548** and **2549** can be connected to the surfaces **2546** and **2547** at a generally perpendicular angle and can also be angled relative to the lateral axis **2524**. Additionally, the surfaces **2548** and **2549** are generally linear surfaces extending at an angle to the surfaces **2546** and **2547** respectively. In certain embodiments, the angle formed between the surfaces **2548** and **2549** can be an obtuse angle, that is, an angle greater than about 90 degrees.

[0192] FIG. 26A includes a conditioning system including a plate and an abrasive article, otherwise referred to as a CMP pad conditioner, in accordance with an embodiment. The conditioning system **2600** can include a holder **2601** which can be configured to be removably coupled to a plate **2501**, which in turn can be removably coupled to a CMP pad conditioner **2521**. The conditioning system of FIG. 26A is illustrated as including particular components that can be separated from each other prior to assembly of the conditioning system. The assembled version of the conditioning system **2600** is further illustrated in FIG. 26B.

[0193] The holder **2601** can include a central opening **2603** extending axially into the body of the holder **2601**. The opening **2603** may facilitate coupling of the holder with other objects used during the CMP process which are not illustrated.

[0194] The holder **2601** further can include openings **2602** and **2604** extending into the body from the upper surface **2605** of the holder **2601**. The openings **2607** and **2608** can be radially spaced apart from each other on opposite sides of the central opening **2603** and circumferentially spaced apart from each other. The openings **2607** and **2608** can extend into the body of the holder **2601** from the rear surface **2606** of the holder **2601**. Notably, the opening **2602** can be connected to the opening **2607** such that the combination of openings **2602** and **2607** extend through the entire thickness of the body of the holder **2601** and thus connected to the upper surface **2605** and rear surface **2606**. Likewise, the opening **2604** can be connected to the opening **2608** such that the combination of openings **2604** and **2608** form an opening extending through the entire thickness of the body of the holder **2601** and connecting the upper surface **2605** and rear surface **2606**. It will be appreciated that the openings **2602** and **2604** can have a greater width (e.g. diameter) as compared to their respective connected openings **2607** and **2608**. This design can facilitate engagement of fasteners therein such that the head of a fastener can be contained within and properly positioned within the openings **2602** and **2604**, without necessarily extending into the openings **2607** and **2608**.

[0195] The conditioning system **2600** further includes a plate **2501** having those features as described in FIG. 25B. As further illustrated in FIG. 26A, the plate **2501** can include a recess **2611** extending axially into the body of the plate **2501** from the upper surface **2514** of the plate **2501**. The recess **2611** can be formed between the central opening **2503** and opening **2508** within the body of the plate **2501**. Additionally, the plate **2501** can include a recess **2612** extending axially

into the body of the plate **2501** from the upper surface **2514** of the plate **2501**. The recess **2612** can be positioned between the central opening **2503** and opening **2507**. It will be appreciated that the recess **2611** and recess **2612** can be connected and define a single recess extending circumferentially around the central opening **2503**. According to certain embodiments, the recesses **2611** and **2612** can be a single, annular-shaped recess extending around the central opening **2503**.

[0196] In particular, the conditioning system **2600** can be formed such that a sealing member **2613** can be disposed within the recess **2611** and **2612** during assembly (See, FIG. 26B). Notably the sealing member **2613** can be a single, monolithic piece, such as an O-ring. As such, the sealing member **2613** can be seated within the recesses **2611** and **2612**, which as described herein can describe an annular-shaped recess. The sealing member **2613** can be provided within the recesses **2611** and **2612** for sealing the central opening **2503** from fluids and/or swarf generated during conditioning operations.

[0197] The conditioning system **2600** can further include a member **2610** configured to be positioned within the cavity **2690** formed within the upper surface **2513** of the plate **2501**. Notably, unlike the embodiment of FIG. 25B, the cavity **2690** may not necessarily include discrete cavity portions. Rather, the cavity **2690** can be an opening extending axially inward into the body of the plate **2501**. The cavity **2690** can be defined by a surface **2691** extending radially inward perpendicular to the upper surface **2513** of the plate **2501**. Additionally, the cavity **2690** can be defined by a bottom surface **2692** connected to the surface **2691** and extending at a generally perpendicular angle to the surface **2691** and in a generally parallel direction to the upper surface **2514** of the plate **2501**.

[0198] The member **2610** can be sized and shaped such that it is configured to be positioned within the cavity **2690** during assembly of the conditioning system **2600**. In accordance with embodiments herein, the member **2610** can be a protective layer or pad of material similar to the protective layer **261** described herein. That is, for example, the member **2610** can be made of a polymer material, such as a thermoset, thermoplastic, resin, elastomer, and a combination thereof. The member **2610** can protect the abrasive texture of the CMP pad conditioner **2521** when it is assembled within the conditioning system, particularly within the cavity **2690** of the plate **2501**.

[0199] The conditioning system further includes a CMP pad conditioner **2521** that may be combined with a sealing member **2609** in accordance with an embodiment. Notably, the sealing member **2609** may be positioned within the groove **2528** of the CMP pad conditioner **2521** to facilitate sealing between the plate **2501** and CMP pad conditioner **2521**. The sealing member can be a pliable material, such as a polymer material, and particularly a thermoset, thermoplastic, elastomer, resin, or a combination thereof.

[0200] FIG. 26B includes a cross-sectional illustration of the conditioning system of FIG. 26A after assembly in accordance with an embodiment. As illustrated, the holder **2601** can overly and can be directly connected to the plate **2501**. The CMP pad conditioner **2521** can be removably coupled to the plate **2501** such that it is contained within the cavity **2690**. Notably, in the assembled form, the rear surface **2606** of the holder **2601** can be directly connected to the upper surface **2514** of the plate **2501**. Moreover, the opening **2607** of the holder **2601** can be axially aligned with the opening **2506** of the plate **2501** such that a fastener **2631** can be placed within

the opening 2602 and extend through opening 2607 of the holder 2601 into the opening 2506 of the plate 2501 to couple the holder 2601 and plate 2501 to each other. Additionally, the opening 2608 can be axially aligned with the opening 2505 such that a fastener 2630 can be placed within the opening 2604 and extend through the openings 2608 and 2505 to couple the holder 2601 and plate 2501 to each other.

[0201] As further illustrated, the sealing member 2613 can be contained within the recesses 2611 and 2612 between the rear surface 2606 of the holder 2601 and upper surface 2514 of the plate 2501. The sealing member 2613 can engage the surfaces of the recesses 2611 and 2612 and the rear surface 2606 of the holder 2601 to form a seal and reduce the likelihood of fluids and/or swarf from entering the center opening 2503.

[0202] As further illustrated in FIG. 26B, the member 2610 can be contained within the cavity 2690 such that a major surface of the member 2610 can be abutting the bottom surface 2692 of the cavity 2690. Additionally, the opposite major surface of the member 2610 can be abutting a major surface of the CMP pad conditioner 2521 to protect the abrasive texture from damage while contained within the cavity 2590. As further illustrated, in the assembled form, the CMP pad conditioner 2521 can be contained within cavity 2690, such that a major surface of the CMP pad conditioner 2521 is abutting the member 2610, and the opposite major surface of the CMP pad conditioner 2521 is protruding from the plate 2501. The major surface of the CMP pad conditioner 2521 protruding from the plate 2501 can extend in an axial direction beyond the plane defined by the upper surface 2513 of the plate 2501. As such, the major surface of the CMP pad conditioner 2521 is placed in a position to accomplish conditioning and the upper surface 2513 of the plate 2501 can be spaced apart from the pad during a conditioning operation.

[0203] After sufficient use of the abrasive article, disassembly of the conditioning system 2600 can be initiated by a user removing fasteners 2631 and 2630 from respective openings to decouple the holder 2601 and plate 2501. After removing the fasteners 2631 and 2630, the plate 2501 and CMP pad conditioner 2521 may still be coupled to each other. To remove the CMP pad conditioner 2521 from the plate 2501, the user may use an object or tool (e.g., a fastener) to extend through the central opening 2503 from the rear surface 2514 of the plate 2501 in the direction 2680. The object can be extended in the direction 2680 through the central opening 2503 until the object abuts the rear surface of the member 2610 or CMP pad conditioner 2521. Applying sufficient force in the direction 2680 can facilitate removal of the CMP pad conditioner 2521 from the cavity 2590 of the plate 2501.

[0204] Depending upon the wear status of the CMP pad conditioner 2521, the CMP pad conditioner 2521 may be reversed, such that the opposite major surface and the corresponding abrasive texture on the opposite major surface is positioned to protrude from the plate 2501. Upon reorienting the CMP pad conditioner 2521, the conditioner can be coupled with the plate 2501 in the cavity 2590 and used to continue the dressing operation. After flipping the CMP pad conditioner 2521, fasteners 2630 and 2631 may be positioned within respective openings to couple the holder 2601 and plate 2501 and complete reassembly of the conditioning system 2600.

[0205] FIGS. 27A-27C include cross-sectional illustrations of portions of a CMP pad conditioner and plate in accordance with an embodiment. Notably, the following

embodiments of FIGS. 27A-27C demonstrate various engagement structures and coupling mechanisms that can be employed with any of the embodiments herein to achieve removable coupling between a CMP pad conditioner and a plate. In such embodiments, the CMP pad conditioner and the plate can utilize various engagement structures have certain surface contours, sealing members, biasing members, and a combination thereof to facilitate removable coupling between the CMP pad conditioner and plate. In particular, the following embodiments of FIGS. 27A-27C can include various coupling mechanisms for use between the CMP pad conditioner and plate, generally at the region 2695 illustrated in FIG. 26B.

[0206] FIG. 27A includes a cross-sectional illustration of a portion of a CMP pad conditioner and plate in accordance with an embodiment. In particular, the embodiment of FIG. 27A includes an illustration of a particular engagement structure utilizing particular coupling surfaces and a sealing member to facilitate removable coupling between the CMP pad conditioner 2521 and the plate 2501. In particular, the plate 2501 includes an arm 2762 extending axially from the body of the plate 2501 and defining a cavity 2590 for engagement of the CMP pad conditioner 2521 as described in embodiments herein. In particular, the arm 2762 can include a flange 2701 extending radially inward at a generally perpendicular angle to the arm 2762.

[0207] The arm 2762 can have a groove 2790 (i.e., a plate groove) defined within an interior surface 2705. In particular, the groove 2790 can be formed by a surface 2702, which is connected to and extending at a generally perpendicular angle to the interior surface 2705. The groove 2790 can further be defined by a surface 2703 connected to the and extending at a generally perpendicular angle to the surface 2702. Moreover, the groove 2790 can further be defined by a surface 2704 connected to and extending at a generally perpendicular angle to the surface 2703. The surfaces 2704 and 2702 can be generally parallel to each other. As such, the surfaces 2702, 2703, and 2704 can define a groove 2790 within the inner surface 2705 of the arm 2762 having a generally rectilinear contour.

[0208] As further illustrated, a sealing member 2609 can be contained within the groove 2790 when the CMP pad conditioner and plate 2501 are assembled. As further illustrated, in the assembled position, the CMP pad conditioner 2521 is configured to abut and contact the sealing member 2609 contained within the groove 2790 of the plate 2501. Notably, the sealing member 2609 is positioned such that a majority of the volume of the sealing member 2609 is contained within the groove 2790 and only a fraction of the surface of the sealing member 2609 is contacted by the groove 2528 of the CMP pad conditioner 2521. Accordingly, in the assembled state, the CMP pad conditioner 2521 can be contained within the cavity 2590 and the groove 2528 of the CMP pad conditioner 2521 can be abutting the sealing member 2609 contained within the groove 2790. It will be appreciated, that in the assembled state, the sealing member may be deformed in a manner to allow some contact between the CMP pad conditioner 2521 and arm 2762 of the plate 2501, however, this may not necessarily always be the case. Such a configuration facilitates removable coupling of the CMP pad conditioner 2521 with the plate 2501 and further facilitates sealing of the connection between the CMP pad conditioner 2521 and plate 2501.

[0209] FIG. 27B includes a cross-sectional illustration of a portion of the CMP pad conditioner 2521 and a plate 2501 and particularly the engagement structure used for removable coupling between the CMP pad conditioner 2521 and plate 2501. As illustrated, the CMP pad conditioner 2521 can have a groove 2528 extending radially into the body of the CMP pad conditioner 2521 for engagement of a sealing member 2609 therein. Unlike the embodiment of FIG. 27A, the embodiment of FIG. 27B is formed such that a majority of the volume of the sealing member 2609 is contained within a groove 2528 formed within the CMP pad conditioner 2521.

[0210] As further illustrated, the plate 2501 can include an arm 2762 extending axially outward from the body of the plate 2501 aiding the formation of the cavity 2590 within the plate 2501. The arm 2762 can include a flange portion 2721 proximate to the upper surface 2513 and extending radially inward. The flange portion 2721 is configured to engage a portion of the sealing member 2609 in the assembled state. The flange 2721 can include a first surface 2722 extending at an angle from the upper surface 2513, a surface 2723 connected to and extending at an angle to the surface 2722 and generally perpendicular to the upper surface 2513, and a surface 2724 connected to and extending at an angle to the surface 2723 to form the radially inward protruding flange portion 2721.

[0211] During assembly the CMP pad conditioner 2521 having the sealing member 2609 contained within the groove 2528 can be fitted into the plate 2501 such that the sealing member 2609 extends beyond and axially inward and radially outward of the flange portion 2721. In the assembled state as illustrated, the sealing member 2609 can be abutting the surface 2724 of the flange portion and the inner surface 2705 of the arm 2762.

[0212] As illustrated, the surfaces of the CMP pad conditioner 2521 can be spaced apart from the surfaces of the plate 2501, such that the sealing member 2609 maintains the connection between the plate 2501 and the CMP pad conditioner 2521. However, in certain instances, the surface 2725 of the CMP pad conditioner 2521 may engage and abut a surface of the plate 2501, particularly the surface 2723 of the flange portion 2721. It will be appreciated, that during assembly and disassembly, the sealing member 2609 can be deformed, such that it can axially translate by the flange portion 2721 and particularly by the surface 2723 of the flange portion. The sealing member 2609 may further be formed and positioned such that it is deformed while the CMP pad conditioner 2521 is engaged within the cavity 2590 of the plate 2501.

[0213] FIG. 27C includes a cross-sectional illustration of a portion of a CMP pad conditioner 2521 and plate 2501 in particularly engagement structures utilized for removable coupling of the CMP pad conditioner 2521 and plate 2501. As illustrated, the plate 2501 can be formed such that it has a recess 2780 extending axially inward into the arm 2762 of the plate 2501 from the upper surface 2513 of the plate 2501. The recess 2780 can be defined as a space between arm portions 2737 and 2731 that can extend axially outward as protrusions or tines on either side of the recess 2780.

[0214] In accordance with one embodiment, the recess 2780 can be formed to contain a resilient member 2733. The resilient member 2733 can be a generally U-shaped member configured to fit the contours of the recess 2780 and bias the arms 2737 and 2731 into biased positions away from each other. As illustrated, the resilient member 2733 can be configured to extend along and have generally the same contour

as the inner surface of the recess 2780, that is, a U-shaped contour. Moreover, in certain embodiments, the recess 2780 may be filled with a pliable material 2732. Suitable pliable materials can include organic or inorganic materials or a combination thereof. In certain instances, the pliable material 2732 can be a polymer, such as an elastomer. Use of the pliable material 2732 within the recess 2780 can provide additional resiliency against the movement of the arm 2737 in the direction 2736 toward the arm 2731.

[0215] As further illustrated, the recess 2780 can be formed with flanges 2735 and 2734 extending toward each other. The flanges 2734 and 2735 can be formed to facilitate containing the resilient member 2733 and pliable material 2732 within the recess 2780.

[0216] As further illustrated, the arm 2737 can be formed such that it has a surface 2738 extending between an inner surface 2739 and upper surface 2513 of the plate 2501. The surface 2738 can have a curved contour and be formed to engage a portion of the CMP pad conditioner 2521 during assembly between the pad conditioner 2521 and plate 2501. In particular instances, the CMP pad conditioner 2521 can be formed such that it has a groove 2528 that is configured to engage and abut the surface 2738 of the arm 2737 during assembly. For example, in the assembled form as illustrated, the groove 2528 can be formed to include a surface 2742 configured to engage an edge between the surface 2738 and surface 2739 of the plate 2501. That is, during assembly, the CMP pad conditioner 2521 can be placed within the cavity 2590 until the arm 2737 is sufficiently moved in the direction 2736 such that the surface 2742 of the CMP pad conditioner 2521 is engaged with and abuts the joint between the surface 2738 and inner surface 2739 of the arm portion 2737.

[0217] Removal of the CMP pad conditioner 2521 from the plate 2501 can include application of force to the back side of the CMP pad conditioner 2521 sufficient to urge the arm 2737 in a direction 2736 for sufficient clearance of the surface 2742 past the surface 2738 of the arm portion 2737 thus releasing the CMP pad conditioner 2521 from the cavity 2590.

[0218] As further illustrated, the inner surface 2739 of the plate 2501 can be formed to have a gap 2740 formed between a bottom surface 2518 of the cavity 2590 within the plate 2501 and a surface of the member 2610. Such a gap 2740 may provide additional flexure of the arm 2737 for suitable removable coupling between the CMP pad conditioner 2521 and plate 2501. Moreover, use of a polymer material for making the plate 2501 may further aid the flexural nature of the arm portion 2737.

[0219] FIG. 28A includes a top view illustration of a back-side of a plate in accordance with an embodiment. The plate 2801 can have a generally circular contour, and a cylindrical three-dimensional shape. As illustrated, the plate 2801 can include a central opening 2503, and openings 2505, 2506, 2507, and 2508 as described in embodiments herein. Moreover, the plate 2801 can include openings 2509, 2510, and 2511 as described in accordance with embodiments herein.

[0220] As further illustrated, the plate 2801 can include recesses 2861, 2862, and 2863 radially spaced apart from a center of the body and circumferentially spaced apart from each other around a center of the body of the plate 2801. The recesses 2861-2863 can extend axially into the body of the plate 2801 for a sufficient depth to contain certain objects therein. Notably, the recesses 2861-2863 can be equilaterally spaced apart such that approximately 120° separate the centers of the recesses 2861-2863.

[0221] In accordance with an embodiment, the recesses **2861-2863** can include magnets **2807**, **2808**, and **2809** contained within the recesses **2861-2863**. It will be appreciated that use of magnets **2807-2809** within the body of the plate **2801** can be used to facilitate magnetic coupling between the plate **2801** and a CMP pad conditioner for removable coupling between the plate **2801** and CMP pad conditioner. As described herein, for such designs, the CMP pad conditioner may utilize a metal portion to aid magnetic coupling with the magnets **2807-2809**.

[0222] As further illustrated, the plate **2801** can include a cavity as defined by dotted line **2805** having a generally circular contour. However, the cavity **2805** is formed to include a flat portion **2802**, a flat portion **2803** and a flat portion **2804** within and extending along portions of the circumference of the cavity **2805**. That is, the arcuate and generally circular surface of the cavity **2805** is interrupted at specific locations along the circumference by flat portions **2802-2804**. The flat portions **2802-2804** are linear surface portions interrupting the generally curved surface of the cavity **2805**. The flat portions **2802-2804** can facilitate proper coupling between the plate **2801** and a CMP pad conditioner, lessening the likelihood of rotation of the CMP pad conditioner within the plate **2801** during operation.

[0223] FIG. **28B** includes a cross-sectional illustration of a portion of the plate **2801** of FIG. **28A** as viewed along a plane defined by the axis **2812**. The plate **2801** can include a recess **2861** extending axially into the body of the plate **2801** and configured to contain a magnet **2807** therein. As further illustrated, the plate **2801** can be formed to include recesses **2822** and **2821** similar to those recesses described in accordance with FIG. **26A** and FIG. **26B** for containing a sealing member therein and sealing the plate **2801** against a holder.

[0224] As further illustrated, the plate **2801** can be formed to include a cavity **2824** extending axially inward into the body of the plate **2801**. The cavity can be defined by a surface **2829** extending perpendicular to the upper surface **2830** of the plate **2801** and a bottom surface **2828** extending generally perpendicular to the axially axis **2866** and substantially parallel to the upper surface **2830** of the plate **2801**. Moreover, the cavity **2824** can be contiguous with and connected to the central opening **2503** of the plate **2801** such that the central opening **2503** extends through the entire thickness of the plate **2801** along the axially axis **2866**.

[0225] During assembly, a member **2834**, which can be a protective layer or pad, can be inserted within the cavity **2824** such that a rear surface **2836** of the member **2834** abuts and is connected to the bottom surface **2828** of the cavity **2824**. Additionally, during assembly a CMP pad conditioner **2831** having a first major surface **2832** and second major surface **2833**, each of which can have abrasive texture, can be placed with the cavity **2824** of the plate **2801**. Notably, the surface **2832** of the CMP pad conditioner **2831** can abut and be directly connected to an upper surface **2835** of the member **2834** when the CMP pad conditioner **2831** is contained within the cavity **2824** of the plate **2801**. It will be appreciated, that while the CMP pad conditioner **2831** is illustrated as having a generally rectangular shape, it can include any features as described in accordance with CMP pad conditioners of the embodiments herein.

[0226] During disassembly of the CMP pad conditioner **2831** from the plate **2801**, a user may insert an object (e.g., a fastener, an elongated tool, or hand) within the central opening **2503** of the plate **2801** to engage the member **2834**, or

alternatively the rear surface **2832** of the CMP pad conditioner **2831**. Force may be applied to the member **2834** or CMP pad conditioner **2831** to urge the CMP pad conditioner in a direction **2870** and thus magnetically decouple the CMP pad conditioner **2831** from the magnets **2807-2809**, and removably couple the CMP pad conditioner **2831** from the plate **2801**.

[0227] FIG. **28C** includes a top view illustration of a plate and CMP pad conditioner coupled to each other in accordance with an embodiment. Notably, the illustration of FIG. **28C** includes a CMP pad conditioner coupled to the plate of FIG. **28A**. As illustrated, the plate **2801** includes flat portions **2802**, **2803**, and **2804**, defined by linear surface regions at the circumference of the cavity configured to contain the CMP pad conditioner **2831**. Moreover, the CMP pad conditioner **2831** can include complimentary flat portions **2842**, **2843**, and **2844** defined by linear surface regions at the circumference of the CMP pad conditioner **2831** configured to directly contact and abut the flat portions **2802**, **2803**, and **2804** of the plate **2801**. Such an arrangement reduces the likelihood of rotation of the CMP pad conditioner **2831** within the plate **2801** during operation.

[0228] FIG. **29** includes a top view illustration of an abrasive tool in accordance with an embodiment. The foregoing embodiments have been directed to abrasive articles utilizing a CMP pad conditioner that is removably coupled to a plate. However, it is also contemplated that a single plate may be used with a plurality of CMP pad conditioners. In particular, an abrasive tool may employ a plurality of CMP pad conditioners removably coupled to a single plate, wherein the plate has a plurality of recesses or cavities to accommodate and removably couple each of the CMP pad conditioners therein.

[0229] The abrasive tool **2900** can include a plate **2901** including those features described in accordance with plates of the embodiments herein. For example, the plate **2901** can have a circular contour as viewed in a top view, and a generally cylindrical three-dimensional shape. The plate **2901** can include a plurality of other openings (not illustrated) extending into the body and configured to aid coupling of the plate **2901** with another object, such as a holder.

[0230] The plate **2901** can include cavities **2911**, **2912**, **2913**, and **2914** (**2911-2914**) within the upper surface of the plate **2901** that extend axially inward into the body of the plate **2901**. The cavities **2911-2914** can be positioned at particular locations within the upper surface of the plate **2901**, and in particular, may be arranged in a pattern around a center of the plate **2901** for proper balance during conditioning operations. The cavities **2911** and **2913** can be radially spaced apart from the center of the plate **2901**, but can be positioned along an axis **2908** and circumferentially spaced apart from each other by an angle of approximately 180 degrees. Likewise, the cavities **2912** and **2914** can be radially spaced apart from a center of the plate, but can be positioned along an axis **2909** such that the cavities **2912** and **2914** can be circumferentially spaced apart from each other by an angle of approximately 180 degrees.

[0231] Each of the cavities **2911-2914** can be formed to contain a respective CMP pad conditioner **2915**, **2916**, **2917**, and **2918**. As such, the cavities **2911-2914** can include features of the embodiments herein to facilitate removable coupling between the plate **2901** and the CMP pad conditioners **2915-2918**. Additionally, the CMP pad conditioners **2915-2918** can include features of the embodiments herein to facilitate removable coupling between the plate **2901** and the

respective CMP pad conditioner. Notably, the CMP pad conditioners **2915-2918** are reversible, such that each of the CMP pad conditioners **2915-2918** has abrasive texture on first and second major surfaces of the substrate.

[0232] While the embodiment of FIG. **29** has illustrated a plate **2901** having four cavities **2911-2914**, which are configured to contain four distinct and separate CMP pad conditioners **2915-2918**, such an embodiment is not intended to be limiting on the number of cavities and CMP pad conditioners that may be included on a single plate. Other embodiments may employ a plate having only 2 cavities. While other embodiments may utilize a plate having a different number of cavities (and a corresponding number of CMP pad conditioners) such as at least about 3 cavities, at least about 4 cavities, at least about 6 cavities, at least about 10 cavities, at least about 16 cavities, at least about 24 cavities, or even at least about 30 cavities. In particular, any number of cavities may be utilized, typically such that the number of cavities is a multiple or two.

[0233] As further illustrated, the plate **2901** can be formed to have an opening **2921** within the cavity **2911**, an opening **2922** within the cavity **2912**, an opening **2923** within the cavity **2913**, and an opening **2924** within the cavity **2914**. The openings **2921-2924** can be formed in the rear surface of the plate **2901** and extend axially into the body of the plate **2901**. As illustrated, the openings **2921-2924** can be formed to extend from the back surface to a bottom surface of the respective cavities, such that the openings allow a user to access a CMP pad conditioner contained within a cavity from the back surface of the plate **2901**. Such a design facilitates removable coupling between the CMP pad conditioners **2915-2918** and the plate **2901**. An operator can use a tool extended through one of the openings **2921-2924** from the rear surface of the plate **2901** to access and force a CMP pad conditioner from a corresponding cavity and aid removal of the CMP pad conditioner from the cavity. The design relationships between the openings **2921-2924** and the cavities **2911-2914** is substantially the same as the design between the central opening **2503** and cavity **2590** illustrated in FIG. **25B**.

[0234] The embodiments herein are directed to a method of forming an abrasive tool including reversible abrasive articles having first and second layers of abrasive grains on first and second major surfaces of the substrate. The abrasive tools can include a combination of features including coupling mechanisms including engagement structures on the abrasive article and engagement structures or coupling surfaces on the plate for removably coupling the two components. Other features according to the embodiments include superior flatness, dual abrasive surfaces having different polishing capabilities, particular shapes of components, sealing members, biasing members, particular materials, collet members, magnets, indicia indicating the wear status of the different layers of abrasive grains, and protective layers. Notably, the abrasive tools herein include a combination of elements that make use of reversible CMP pad conditioners having improved lifetime and a variety of capabilities to improve the conditioning process.

[0235] In the foregoing, reference to specific embodiments and the connections of certain components is illustrative. It will be appreciated that reference to components as being coupled or connected is intended to disclose either direct connection between said components or indirect connection through one or more intervening components as will be appreciated to carry out the methods as discussed herein. As

such, the above-disclosed subject matter is to be considered illustrative, and not restrictive, and the appended claims are intended to cover all such modifications, enhancements, and other embodiments, which fall within the true scope of the present invention. Thus, to the maximum extent allowed by law, the scope of the present invention is to be determined by the broadest permissible interpretation of the following claims and their equivalents, and shall not be restricted or limited by the foregoing detailed description.

[0236] The Abstract of the Disclosure is provided to comply with Patent Law and is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing Detailed Description of the Drawings, various features may be grouped together or described in a single embodiment for the purpose of streamlining the disclosure. This disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter may be directed to less than all features of any of the disclosed embodiments. Thus, the following claims are incorporated into the Detailed Description of the Drawings, with each claim standing on its own as defining separately claimed subject matter.

1. An abrasive tool comprising:
a CMP pad conditioner including:
a substrate having a first major surface and a second major surface opposite the first major surface;
a first layer of abrasive grains attached to the first major surface;
a second layer of abrasive grains attached to the second major surface; and
a first indicia on the substrate corresponding to the first major surface and identifying a wear status of the first layer of abrasive grains.

2-6. (canceled)

7. The abrasive tool of claim 1, wherein the first major surface of the substrate further comprises a first bonding layer and the first layer of abrasive grains are contained within the first bonding layer.

8. The abrasive tool of claim 7, wherein the first bonding layer comprises a material selected from the group of materials consisting of metals, polymers, ceramics, and a combination thereof.

9. The abrasive tool of claim 8, wherein the first bonding layer comprises a metal.

10. (canceled)

11. The abrasive tool of claim 8, wherein the first bonding layer is a polymer material.

12-19. (canceled)

20. The abrasive tool of claim 1, wherein the abrasive grains of the first layer of abrasive grains are different than the abrasive grains of the second layer of abrasive grains.

21. The abrasive tool of claim 1, wherein the abrasive grains of the first layer have an average grit size that is less than 250 microns.

22. The abrasive tool of claim 21, wherein the abrasive grains of the second layer of abrasive grains have a same average grit size of the abrasive grains of the first layer of abrasive grains.

23. The abrasive tool of claim 1, wherein the first layer of abrasive grains are arranged in a self avoiding random distribution.

24. The abrasive tool of claim **23**, wherein the second layer of abrasive grains are arranged in a same distribution as the first layer of abrasive grains.

25-30. (canceled)

31. An abrasive tool comprising:

a CMP pad conditioner including:

a substrate having a first major surface, a second major surface opposite the first major surface, and a side surface extending between the first major surface and the second major;

a first layer of abrasive grains attached to the first major surface;

a second layer of abrasive grains attached to the second major surface; and

a first sealing member extending in a peripheral direction along a portion of the side surface of the substrate.

32. The abrasive tool of claim **31**, wherein the first sealing member comprises a deformable member.

33-34. (canceled)

35. The abrasive tool of claim **31**, wherein the first sealing member is disposed within a recess along a portion of the side surface.

36. The abrasive tool of claim **31**, further comprising a second sealing member extending in a peripheral direction along a portion of the side surface and spaced apart from the first sealing member.

37. (canceled)

38. The abrasive tool of claim **31**, wherein the substrate comprises an engagement structure.

39. The abrasive tool of claim **38**, wherein the engagement structure comprises a protrusion extending from the side surface of the substrate.

40-48. (canceled)

49. The abrasive tool of claim **38**, further comprising a collet member coupled to the substrate at the engagement structure.

50. (canceled)

51. The abrasive tool of claim **49**, wherein the collet member comprises an engagement structure configured to be coupled to a plate.

52-89. (canceled)

90. An abrasive tool for use as a CMP pad conditioner comprising:

a plate; and

an abrasive article comprising:

a substrate having a first major surface and a second major surface opposite the first major surface;

a first layer of abrasive grains attached to the first major surface;

a second layer of abrasive grains attached to the second major surface; and

wherein the plate and abrasive article are removably coupled via a coupling mechanism.

91. The abrasive tool of claim **90**, wherein the coupling mechanism includes an engagement structure attached to the abrasive article.

92. The abrasive tool of claim **90**, wherein the coupling mechanism includes a coupling surface on the plate.

93. The abrasive tool of claim **90**, wherein the engagement structure includes a structure selected from the group of struc-

tures consisting of latches, fasteners, clamps, interference fit connections, and a combination thereof.

94-99. (canceled)

100. An abrasive tool for use as a CMP pad conditioner comprising:

an abrasive article comprising:

a substrate having a first major surface and a second major surface opposite the first major surface;

a first layer of abrasive grains attached to the first major surface;

a second layer of abrasive grains attached to the second major surface;

a plate comprising a magnet for removably coupling the plate and abrasive article.

101. The abrasive tool of claim **100**, wherein the plate comprises a body and includes at least one magnet embedded within the body.

102. The abrasive tool of claim **100**, wherein the substrate comprises a metal material configured to magnetically couple to the magnet of the plate.

103-145. (canceled)

146. A method of dressing a CMP pad comprising:

coupling an abrasive article to a dressing machine, the abrasive article comprising a substrate having a first major surface and a second major surface opposite the first major surface, wherein the abrasive article comprises a first abrasive surface at the first major surface of the substrate, and a second abrasive surface at the second major surface of the substrate, and wherein the abrasive article is mounted on the dressing machine to expose the first abrasive surface;

contacting the first abrasive surface to a surface of a first CMP pad and moving the first CMP pad relative to the first abrasive surface to condition the first CMP pad;

inverting the abrasive article to expose the second abrasive surface; and

contacting the second abrasive surface to a surface of a second CMP pad and moving the second CMP pad relative to the second abrasive surface to condition the second CMP pad.

147-148. (canceled)

149. The method of claim **146**, wherein coupling the abrasive article to a dressing machine comprises removably coupling the abrasive article to a plate, wherein the plate is directly coupled to the dressing machine.

150-151. (canceled)

152. The method of claim **149**, wherein inverting the abrasive article comprises:

removing the abrasive article from the plate;

inverting the abrasive article; and

coupling the abrasive article to the plate, wherein the second abrasive surface is exposed to conduct a conditioning operation.

153. The method of claim **152**, wherein during removing the abrasive article from the plate, the plate remains coupled to the dressing machine.

154. The method of claim **146**, wherein the first abrasive surface is used for an expected conditioning lifetime before the abrasive article is inverted.

155-177. (canceled)

* * * * *