



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
61/489,074	05/23/2011		110	02074-24012.PROV		

CONFIRMATION NO. 9927

20551
THORPE NORTH & WESTERN, LLP.
P.O. Box 1219
SANDY, UT 84091-1219

FILING RECEIPT



OC000000048289191

Date Mailed: 06/22/2011

Receipt is acknowledged of this provisional patent application. It will not be examined for patentability and will become abandoned not later than twelve months after its filing date. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Applicant(s)

Chien-Min Sung, Tansui, TAIWAN;

Power of Attorney:

David Osborne--44989

If Required, Foreign Filing License Granted: 06/17/2011

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 61/489,074**

Projected Publication Date: None, application is not eligible for pre-grant publication

Non-Publication Request: No

Early Publication Request: No

**** SMALL ENTITY ****

Title

CMP Pad Dresser Having Leveled Tips and Associated Methods

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international

patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and

Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET – Page 1 of 2

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. electronically filed

INVENTOR(S)		
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
Chien-Min	Sung	Tansui, TAIWAN
<i>Additional inventors are being named on the _____ separately numbered sheets attached hereto.</i>		
TITLE OF THE INVENTION (500 characters max):		
CMP Pad Dresser Having Leveled Tips and Associated Methods		
<i>Direct all correspondence to:</i> CORRESPONDENCE ADDRESS		
☒ The address corresponding to Customer Number: 20,551		
OR		
☐ Firm or Individual Name		
Address		
City	State	Zip
Country	Telephone	Email
ENCLOSED APPLICATION PARTS (check all that apply)		
☐ Application Data Sheet. See 37 CFR 1.76 ☐ CD(s), Number of CDs _____		
☒ Drawing(s) <i>Number of Sheets</i> <u>2</u> ☐ Other (specify) _____		
☒ Specification (e.g. description of the invention) <i>Number of Pages</i> <u>29</u>		
Fees Due: Filing Fee of \$220 (\$110 for small entity). If the specification and drawings exceed 100 sheets of paper, an application size fee is also due, which is \$270 (\$135 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).		
METHOD OF PAYMENT OF THE FILING FEE AND APPLICATION SIZE FEE FOR THIS PROVISIONAL APPLICATION FOR PATENT		
☒ Applicant claims small entity status. See 37 CFR 1.27. 110		
☐ A check or money order made payable to the <i>Director of the United States Patent and Trademark Office</i> is enclosed to cover the filing fee and application size fee (if applicable).		
☒ Payment by credit card. <i>Form PTO-2038 is attached.</i>		
☒ The Director is hereby authorized to charge the filing fee and application size fee (if applicable) or credit any overpayment to Deposit Account Number: <u>20-0100</u> .		
USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT		

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

IPR2024-00535
SUNG Exhibit 2002

PROVISIONAL APPLICATION COVER SHEET
Page 2 of 2

PTO/SB/16 (12-08)

Approved for use through 06/30/2010. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

SIGNATURE /David W. Osborne/ Date May 23, 2011

TYPED or PRINTED NAME David W. Osborne REGISTRATION NO. 44989
(if appropriate)

TELEPHONE (801) 566-6633 Docket Number: 02074-24012.PROV

CMP PAD DRESSER HAVING LEVELED TIPS AND ASSOCIATED METHODS

BACKGROUND OF THE INVENTION

The semiconductor industry currently spends in excess of one billion U.S. dollars each
5 year manufacturing silicon wafers that must exhibit very flat and smooth surfaces. Known
techniques to manufacture smooth and even-surfaced silicon wafers are plentiful. The most
common of these involves the process known as Chemical Mechanical Polishing (CMP) which
includes the use of a polishing pad in combination with an abrasive slurry. Of central
importance in all CMP processes is the attainment of high performance levels in aspects such
10 as uniformity of polished wafer, smoothness of the IC circuitry, removal rate for productivity,
longevity of consumables for CMP economics, etc.

SUMMARY OF THE INVENTION

The present disclosure provides CMP pad dressers and associated methods
15 thereof. In one aspect, for example, a CMP pad dresser can include a matrix layer and a
monolayer of a plurality of superabrasive particles embedded in the matrix layer, where
each superabrasive particle in the monolayer protrudes from the matrix layer. The
difference in the protrusion distance between the highest protruding tip and the next
highest protruding tip of the monolayer of superabrasive particles can be less than or equal
20 to about 20 microns, and the difference in protrusion distance between the highest 1% of
the protruding tips of the monolayer of superabrasive particles are within about 80
microns or less. In one specific aspect, a rigid support is coupled to the matrix layer.

In another aspect, the difference in protrusion distance between the highest
protruding tip and the next highest protruding tip of the monolayer of superabrasive
25 particles is less than or equal to about 15 microns. In yet another aspect, the difference in
protrusion distance between the highest protruding tip and the next highest protruding tip
of the monolayer of superabrasive particles is less than or equal to about 10 microns. In a
further aspect, the difference in protrusion distance between the highest 10 protruding tips
of the monolayer of superabrasive particles are within about 30 microns or less. In

another aspect, the difference in protrusion distance between the highest 100 protruding tips of the monolayer of superabrasive particles are within about 50 microns or less. In yet another aspect, the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are within about 50
5 microns or less.

In another aspect, a CMP pad dresser is provided. Such a dresser can include a first monolayer of superabrasive particles disposed on one side of a metal support layer and a second monolayer of superabrasive particles disposed on the metal support layer on an opposite side from the first monolayer. The superabrasive particles of the second
10 monolayer are positioned to have substantially the same distribution as the superabrasive particles of the first monolayer, and a rigid support is coupled to the second monolayer of superabrasive particles opposite the first monolayer.

In yet another aspect, a method of making a CMP pad dresser includes disposing a first monolayer of superabrasive particles on a metal support layer and disposing a second
15 monolayer of superabrasive particles on the metal support layer on a side opposite the first monolayer. The superabrasive particles of the second monolayer are positioned to have substantially the same distribution as the superabrasive particles of the first monolayer. The method further includes bonding the first monolayer of superabrasive particles and the second monolayer of superabrasive particles to the metal support layer such that
20 symmetrical forces due to the substantially similar distribution between the first monolayer and the second monolayer precludes substantial warping of the metal support layer. In one aspect, the method can further include coupling the second monolayer of superabrasive particles to a rigid support.

In one aspect, the bonding of at least one of the first monolayer and the second
25 monolayer is by brazing with a braze material. In another aspect, the bonding of at least one of the first monolayer and the second monolayer is under heat and pressure. In one specific aspect, the heat and pressure bonds at least one of the first monolayer and the second monolayer directly to the metal support layer. In another specific aspect, the bonding of at least one of the first monolayer and the second monolayer further includes

disposing a sintering compound on the metal support layer in contact with at least one of the first monolayer and the second monolayer and sintering the sintering compound to bond the at least one of the first monolayer and the second monolayer to the metal support layer. In one specific aspect, the method further includes infiltrating the sintering compound with a braze material during bonding.

In yet another aspect, a method of minimizing warpage of a CMP pad dresser during manufacture is provided. Such a method can include substantially equalizing warping forces on opposing sides of a metal support layer during bonding of a plurality of superabrasive particles thereto, wherein warpage of the support layer is minimized during bonding due to the equalized forces on opposing sides. In one aspect, substantially equalizing forces includes arranging the plurality of superabrasive particles on opposing sides of the support layer such that the plurality of superabrasive particles has substantially the same distribution on either side of the support layer to substantially equalize warping forces during bonding.

In a further aspect, a CMP pad dresser is provided. Such a dresser can include a plurality of superabrasive particles arranged as a working surface, wherein the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the first monolayer of superabrasive particles is less than or equal to about 20 microns, and wherein the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are within about 80 microns.

There has thus been outlined, rather broadly, various features of the invention so that the detailed description thereof that follows may be better understood, and so that the present contribution to the art may be better appreciated. Other features of the present invention will become clearer from the following detailed description of the invention, taken with the accompanying claims, or may be learned by the practice of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic side view of a CMP pad dresser in accordance with an embodiment of the present invention;

5 FIG. 2 is a schematic side view of a CMP pad dresser in accordance with an embodiment of the present invention;

FIG. 3 is a schematic side view of a CMP pad dresser in accordance with an embodiment of the present invention;

FIG. 4 is a schematic side view of a CMP pad dresser in accordance with an embodiment of the present invention; and

10 FIG. 5 is a schematic side view of a CMP pad dresser in accordance with an embodiment of the present invention;

It will be understood that the above figures are merely for illustrative purposes in furthering an understanding of the invention. Further, the figures are not drawn to scale, thus dimensions, particle sizes, and other aspects may, and generally are, exaggerated to make
15 illustrations thereof clearer. Therefore, departure can be made from the specific dimensions and aspects shown in the figures in order to produce the heat spreaders of the present invention.

DETAILED DESCRIPTION

20 Before the present invention is disclosed and described, it is to be understood that this invention is not limited to the particular structures, method steps, or materials disclosed herein, but is extended to equivalents thereof as would be recognized by those ordinarily skilled in the relevant arts. It should also be understood that terminology employed herein is used for the purpose of describing particular embodiments only and is
25 not intended to be limiting.

It must be noted that, as used in this specification and the appended claims, the singular forms “a,” “an” and, “the” include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to “a diamond particle” includes one or

more of such particles and reference to “the layer” includes reference to one or more of such layers.

Definitions

In describing and claiming the present invention, the following terminology will be
5 used in accordance with the definitions set forth below.

As used herein, the terms “conditioner” and “dresser” can be used interchangeably, and refer to a tool used to condition or dress a pad, such as a CMP pad.

As used herein, “dressing segment” refers to a dressing or conditioning element of a CMP pad dresser. Dressing segments are utilized in the present invention to carry
10 superabrasive particles having leveled tips. Thus superabrasive particles are introduced into a CMP pad dresser by the incorporation of multiple dressing segments. It should be noted that a variety of techniques of attaching the dressing segments to the substrates, and a variety of techniques of attaching the superabrasive particles to the dressing segments, are discussed herein. It is to be understood that all of these various attachment
15 mechanisms can be used interchangeably herein: that is, if a method of attaching a dressing segment to a substrate is discussed herein, the method of attachment discussed can also be used to attach a superabrasive particles to a dressing segment. For any particular CMP pad dresser being discussed, however, it is understood that attachment methods of the superabrasive particles to the dressing segments can differ from, or can be the same as, the
20 method used to attach the dressing segments to the pad conditioner substrate.

As used herein, “superabrasive” may be used to refer to any crystalline, or polycrystalline material, or mixture of such materials which has a Mohr’s hardness of about 8 or greater. In some aspects, the Mohr’s hardness may be about 9.5 or greater. Such materials include but are not limited to diamond, polycrystalline diamond (PCD),
25 cubic boron nitride (cBN), polycrystalline cubic boron nitride (PcBN), corundum and sapphire, as well as other superabrasive materials known to those skilled in the art. Superabrasive materials may be incorporated into the present invention in a variety of forms including particles, grits, films, layers, pieces, segments, etc. In some cases, the

superabrasive materials of the present invention are in the form of polycrystalline superabrasive materials, such as PCD and PcBN materials.

As used herein, “organic material” refers to a semisolid or solid complex or mix of organic compounds. “Organic material layer” and “organic matrix” may be used interchangeably, and refer to a layer or mass of a semisolid or solid complex or mix of organic compounds, including resins, polymers, gums, etc. The organic material can be a polymer or copolymer formed from the polymerization of one or more monomers. In some cases, such organic material can be adhesive.

As used herein, the process of “brazing” is intended to refer to the creation of chemical bonds between the carbon atoms of the superabrasive particles/materials and the braze material. Further, “chemical bond” means a covalent bond, such as a carbide or boride bond, rather than mechanical or weaker inter-atom attractive forces. Thus, when “brazing” is used in connection with superabrasive particles a true chemical bond is being formed. However, when “brazing” is used in connection with metal to metal bonding the term is used in the more traditional sense of a metallurgical bond. Therefore, brazing of a superabrasive segment to a tool body does not necessarily require the presence of a carbide former.

As used herein, “particle” is as used herein in connection with diamond particles, and refers to a particulate form of diamond. Such particles may take a variety of shapes, including round, oblong, square, euohedral, etc., can be either single crystal or polycrystalline, and can have a number of mesh sizes. As is known in the art, “mesh” refers to the number of holes per unit area as in the case of U.S. meshes. All mesh sizes referred to herein are U.S. mesh unless otherwise indicated. Further, mesh sizes are generally understood to indicate an average mesh size of a given collection of particles since each particle within a particular “mesh size” may actually vary over a small distribution of sizes.

As used herein, “sintering” refers to the joining of two or more individual particles to form a continuous solid mass. The process of sintering involves the consolidation of particles to at least partially eliminate voids between particles.

The term “metallic” refers to both metals and metalloids. Metals include those compounds typically considered metals found within the transition metals, alkali and alkali earth metals. Examples of metals are Ag, Au, Cu, Al, and Fe. Metalloids include specifically Si, B, Ge, Sb, As, and Te. Metallic materials also include alloys or mixtures that include metallic materials. Such alloys or mixtures may further include additional additives. In the present invention, carbide formers and carbon wetting agents may be included as alloys or mixtures, but are not anticipated to be the only metallic component. Examples of such carbide formers are Sc, Y, Ti, Zr, Hf, V, Nb, Cr, Mo, Mn, Ta, W, and Tc. Examples of carbon wetting agents are Co, Ni, Mn, and Cr.

10 As used herein, “infiltrating” refers to a situation where a material is heated to its melting point and then flows as a liquid through the interstitial voids between particles.

As used herein, the term “substantially” refers to the complete or nearly complete extent or degree of an action, characteristic, property, state, structure, item, or result. For example, an object that is “substantially” enclosed would mean that the object is either
15 completely enclosed or nearly completely enclosed. The exact allowable degree of deviation from absolute completeness may in some cases depend on the specific context. However, generally speaking the nearness of completion will be so as to have the same overall result as if absolute and total completion were obtained.

The use of “substantially” is equally applicable when used in a negative
20 connotation to refer to the complete or near complete lack of an action, characteristic, property, state, structure, item, or result. For example, a composition that is “substantially free of” particles would either completely lack particles, or so nearly completely lack particles that the effect would be the same as if it completely lacked particles. In other words, a composition that is “substantially free of” an ingredient or element may still
25 actually contain such item as long as there is no measurable effect thereof.

As used herein, the term “about” is used to provide flexibility to a numerical range endpoint by providing that a given value may be “a little above” or “a little below” the endpoint.

As used herein, a plurality of items, structural elements, compositional elements,

and/or materials may be presented in a common list for convenience. However, these lists should be construed as though each member of the list is individually identified as a separate and unique member. Thus, no individual member of such list should be construed as a de facto equivalent of any other member of the same list solely based on their presentation in a common group without indications to the contrary.

Concentrations, amounts, and other numerical data may be expressed or presented herein in a range format. It is to be understood that such a range format is used merely for convenience and brevity and thus should be interpreted flexibly to include not only the numerical values explicitly recited as the limits of the range, but also to include all the individual numerical values or sub-ranges encompassed within that range as if each numerical value and sub-range is explicitly recited. As an illustration, a numerical range of “about 1 to about 5” should be interpreted to include not only the explicitly recited values of about 1 to about 5, but also include individual values and sub-ranges within the indicated range. Thus, included in this numerical range are individual values such as 2, 3, and 4 and sub-ranges such as from 1-3, from 2-4, and from 3-5, etc., as well as 1, 2, 3, 4, and 5, individually. This same principle applies to ranges reciting only one numerical value as a minimum or a maximum. Furthermore, such an interpretation should apply regardless of the breadth of the range or the characteristics being described.

The Invention

The present disclosure generally provides CMP pad dressers and associated methods that can be utilized in conditioning (e.g., smoothing, polishing, dressing) a CMP pad. Pad conditioners of the present invention can be advantageously utilized, for example, in dressing CMP pads that are used in polishing, finishing or otherwise affecting semiconductor materials. Specifically, the present disclosure concerns CMP pad dressers having superabrasive particles with substantially leveled tips. Traditional CMP pad dresser manufacturing methods, even many of those describing techniques for leveling superabrasive particle tips prior to fixation, generally contain significant variation in tip height across the surface of the dresser. Often, the superabrasive particles are affixed to

the CMP pad dresser support in a manner that disrupts any leveling that has occurred. For example, fixation techniques that utilize high heat and/or pressure can cause warping of the dresser support as the dresser cools. Thus, unless steps are taken to avoid such warpage, superabrasive particles are not maintained in their leveled state following cooling of the dresser. This can be particularly problematic with brazing techniques.

Accordingly, minimizing the warpage of the metal support layer can maintain a greater degree of leveling of superabrasive particle tips in the finished tool. When heat and/or pressure are used to make a superabrasive tool, warpage of the metal support layer can cause great variations in tip height level, even for those particles that were leveled prior to heating and/or applying pressure. By distributing the warpage forces equally or substantially equally on both sides of the metal support layer through the arrangement of the superabrasive particles, these forces effectively cancel each other with respect to the degree of warping occurring in the metal support layer, thus also minimizing the relative height movement of the superabrasive particles relative to one another.

The present CMP pad dressers include a layer of superabrasive particles having substantially leveled tips across the working surface of the finished CMP pad dresser. A variety of techniques can be utilized to maintain tip leveling, and any such technique is considered to be within the present scope. A few non-limiting examples of such techniques are described below.

In one aspect, as is shown in FIG. 1, a CMP pad dresser 10 includes a monolayer of a plurality of superabrasive particles 12 embedded in a matrix layer 14, such that each superabrasive particle in the monolayer protrudes from the matrix layer. The difference in protrusion distance 16 between the highest protruding tip 17 and the next highest protruding tip 18 of the monolayer of superabrasive particles is less than or equal to about 20 microns. Additionally, the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are within about 80 microns or less. In other words, for the 1% of the plurality of superabrasive particles that have the highest protruding tips, the variance in protrusion distance for that 1% is less than or equal to about 80 microns. Thus, the two highest protruding superabrasive

particle tips protrude to within about 20 microns or less of each other, and in addition, the highest protruding 1% of superabrasive particle tips protrude to within about 80 microns or less of each other. In another aspect, the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the monolayer of
5 superabrasive particles is less than or equal to about 15 microns. In yet another aspect, the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the monolayer of superabrasive particles is less than or equal to about 10 microns. In a further aspect, the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are
10 within about 70 microns or less. In yet another aspect, the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are within about 50 microns or less. In another aspect, and in addition to the protrusion variance of the highest two protruding tips, the difference in protrusion distance between the highest 10 protruding tips of the monolayer of
15 superabrasive particles are within about 30 microns or less. In yet another aspect, the difference in protrusion distance between the highest 100 protruding tips of the monolayer of superabrasive particles are within about 50 microns or less. Additionally, in one aspect, the rigid support can be coupled to the matrix layer (not shown).

Various methods can be utilized to measure superabrasive particle tip height to
20 determine the difference in protrusion distance between tips. As such, any method for making such a determination is considered to be within the present scope. It should be noted that for the purposes of the present disclosure, the term “protrusion” refers to the height of a particle relative to some reference point. Techniques for such measurements can include direct measurements of the tip heights relative to a reference point such as, for
25 example, the highest particle tip, a surface of a rigid support, the bottom surface of the matrix, etc. Measurements of particle height from the surface of the matrix material can be problematic, however, due to the irregular nature of such materials due to wicking around the superabrasive particles. In those cases whereby the matrix material is uniform, such a surface may be used to determine particle height. Additionally, a relative

protrusion or height difference between two particles would be the difference in the heights between these particles measured from a common reference point. Additionally, in some cases the superabrasive particles may lie along a slope, curvature, or some other arrangement that is not parallel to the metal support layer. In these cases, the protrusion height would be normalized against the slope, curvature, or other arrangement so that the relative protrusion height difference between particles can be measured in the absence of the slope, curvature, etc. It should be noted that superabrasive particle tip height leveling can, in some cases, be independent from the positioning or patterning of the superabrasive particles across the surface of the dresser.

One example of a direct measurement technique can include an optical scanning process to evaluate superabrasive particle tip positions. In one such process, an optical scanner can scan the surface of the CMP pad dresser to determine the height of the superabrasive particle tips relative to a fixed point. For example, the scanner can scan downward in space toward the dresser until the highest tip is located. The highest tip can then be set to the reference point, and the scanner can continue scanning in a direction toward the dresser measuring the distance from the reference point to each superabrasive particle tip across the surface of the dresser. Accordingly, the difference in protrusion distance between all of the superabrasive particles across the dresser can be directly measured.

Furthermore, measurement techniques can also include indirect measurements, such as, for example, applying the diamond monolayer to a deformable substrate that deforms relative to the protrusion distance of the particle tips. The diamond monolayer can be pressed into the deformable substrate and/or moved across the deformable substrate to form a scratch pattern therein. Tip height can thus be extrapolated from such indirect measurements.

A variety of materials are contemplated for use as superabrasive particles. Any superabrasive known that can be utilized in a CMP pad dresser should be considered to be within the present scope. Non-limiting examples of such materials include diamond materials, nitride materials, ceramics, and the like. In one aspect, the superabrasive

particles include diamond materials. Such diamond materials can include natural or synthetic diamond, single crystal, polycrystalline, and the like. In another aspect, the superabrasive particles include cubic boron nitride materials. Additionally, various diamond particles sizes can be used, including mesh sizes such as 10/20, 30/40, 80/90,
5 90/100, 100/120, 120/140, 140/170, 170/200, 200/230, 230/270, 270/325, and 325/400.

A CMP pad dresser having such substantially leveled tip arrangements can have a low scratch rate because superabrasive particles are less likely to pull out of the matrix layer due to their more uniform protrusion distribution compared to traditional dressers. Additionally, the more uniform protrusion distributions of such a dressers allows the
10 conditioning of CMP pads in such a manner as to facilitate good polishing rates while at the same time extending the effective working life of the dresser. These benefits can be affected by, for example, uniform asperity spacing and size distribution in the CMP pad.

In one aspect of the present disclosure, superabrasive tip leveling can be accomplished by manufacturing the CMP pad dresser in such a way that the effects of
15 warpage are minimized. For example, in one aspect a CMP pad dresser can be made in at least a two stage process, where the first stage is performed in a manner that minimizes perturbations of the leveled tips in a process that would normally significantly move the superabrasive tips out of a leveled arrangement, such as, for example, by brazing. The second stage of the process can further enhance the leveling of superabrasive particle tips
20 across the CMP pad dresser.

Various exemplary configurations of CMP pad dressers having substantially leveled tips are contemplated. In one aspect, for example, a CMP pad dresser can include a first monolayer of superabrasive particles disposed on one side of a metal support layer and a second monolayer of superabrasive particles disposed on the metal support layer on
25 an opposite side from the first monolayer. The superabrasive particles of the second monolayer are positioned to have substantially the same distribution as the superabrasive particles of the first monolayer. A rigid support is coupled to the second monolayer of superabrasive particles opposite the first monolayer to provide support to the dresser.

As is shown in FIG. 2, a first monolayer of superabrasive particles 22 is arranged on a surface of a metal support layer 24. A second monolayer of superabrasive particles 26 is arranged on the metal support layer 24 on a side that is opposite to the first monolayer. As is discussed further below, in some cases the first and second monolayers of superabrasive particles can be arranged such that corresponding superabrasive particles across the metal support layer are in substantial alignment, as is shown in FIG. 2. In other cases, the superabrasive particles of the first and second monolayers can be arranged in a substantially similar distribution, but may or may not be substantially aligned with one another across the metal support layer.

The metal support layer can be any material capable of supporting the diamond monolayer during tool formation. Such materials can include, without limitation, metal materials, metal alloy materials, braze alloy materials, ceramic materials, composites, and the like.

In one aspect, the superabrasive particles can be arranged into a predetermined pattern. Such a pattern can be a uniformly distributed pattern or a non-uniformly distributed pattern. Additionally, a variety of techniques are contemplated to facilitate the arrangement of superabrasive particles into a predetermined pattern. Predetermined is understood to mean a non-random pattern that has been determined prior to arranging the superabrasive particles. In one aspect, a predetermined pattern can also apply to a predetermined spacing between particles. Non-limiting examples of such techniques include arrangement by a template, arrangement using spots of adhesives, arrangement on a first substrate followed by a pattern specific transfer from the first substrate to the metal support layer, and the like, including combinations thereof. The superabrasive particles from either of the monolayers can be temporarily held in position in the predetermined pattern using a variety of techniques, including, without limitation, adhesives, dimpled locations on the metal support matrix, a supporting compound such as, for example, a wax, and the like, including combinations thereof. In one specific aspect, the superabrasive particles can be temporarily coupled to the metal support layer using an adhesive that then volatilizes away and is eliminated during construction of the dresser.

The disposition of a monolayer of superabrasive particles on each side of the metal layer thus moderates the thermal shrinkage from the brazing temperature that would otherwise buckle a distribution of superabrasive particles arranged on just one side. By applying a monolayer to each side of the metal support layer, warping forces such as thermal movement and pressure can be equalized or substantially equalized on both sides. As such, the warpage of the metal support layer can be minimized. In other words, the forces responsible for warping are applied substantially equally to each side of the metal layer and can thus at least partially cancel one another out, thus minimizing warpage that can otherwise occur. In some aspects, the superabrasive particles making up the monolayers on each side of the metal layer can have matching configurations, patterns, or orientations to one another. In this way there can be a substantially matching spatial arrangement of superabrasive particles on each side of the metal layer. In another aspect, the configurations, patterns, or orientations can be different or varied from one another, or may be partially matching. In yet another aspect, the patterned placement of the superabrasive particles on one side of the metal support layer can be substantially aligned with the pattern of superabrasive particles on the other side of the metal layer so that particle locations match one another. In some aspects, there can be a direct correspondence between the spatial positioning of superabrasive particles on one side of the metal support layer and the spatial positioning of superabrasive particles on the other side of the metal support layer. In another aspect, the patterns of superabrasive particles may match or substantially match one another, but may be offset on opposite sides of the metal support layer so that particle locations do not match one another.

In another aspect, as is shown in FIG. 3, a first monolayer of superabrasive particles 32 is arranged on a surface of a metal support layer 34. A second monolayer of superabrasive particles 36 is arranged on the metal support layer 34 on a side that is opposite to the first monolayer. A bonding material 38 secures the first monolayer and the second monolayer to the metal support layer 34. The bonding material can be any material capable of securing the first and second monolayer to the metal support layer. In some aspect, the bonding material can be the same for securing the first monolayer and the

second monolayer, while in other aspects, the bonding material can be different for securing the first monolayer and the second monolayer.

5 The bonding material can be any material capable of securing superabrasive particles therein. Non-limiting examples of bonding materials include metal brazes, metal braze alloys, organic matrix materials, sintered materials, electroplated materials, and the like, including combinations thereof.

10 In one aspect, for example, the superabrasive particles can be brazed to the metal support layer, and thus the bonding material can be a metal braze or metal braze alloy. Metal brazing techniques are known in the art. A green braze material can be applied to the metal support layer on or around the superabrasive particles. The metal braze can be applied in any know configuration, including braze sheets, powders, pastes, sprays, and the like, including combinations thereof. Once applied to the metal support layer, the braze can be heated and melted to coat at least a portion of the metal support layer and to bond the superabrasive particles. The heating temperature can vary depending on the braze material used, but in one aspect can be from about 700°C to about 1200°C. The superabrasive particles in the first and second monolayer are thus arranged such that thermal forces exerted on the metal support layer during heating and cooling are substantially equalize in order to minimize warping.

20 In one non-limiting example, the superabrasive particles can be bonded to the metal support layer by brazing with a nickel-based alloy containing chromium. In another example, the brazing can include pressing the superabrasive particles with a flat ceramic material that cannot be bonded to the braze in order to level the superabrasive particle tips. Various braze alloys are contemplated, including non-limiting examples such as BNi_2 , BNi_7 , and the like.

25 Additionally, in one aspect at least one of the first and second monolayers of superabrasive particles can be coupled to the metal support layer by an electrodeposition process, and thus the bonding material can be an electrodeposited metal material. As an example of a suitable method for positioning and retaining abrasive materials prior to and during the electrodeposition process, a mold can be used that includes an insulating

material that can effectively prevent the accumulation of electrodeposited material on the molding surface. Superabrasive particles can be held on the molding surface of the mold during electrodeposition. As such, the accumulation of electrodeposited material can be prevented from occurring on the particle tips and the working surface of the pad

5 conditioner substrate. Such techniques are described in U.S. Patent Application Serial No. 11/292,938, filed December 2, 2005, which is hereby incorporated herein by reference.

In another aspect, the superabrasive particles can be bonded to the metal support layer by sintering, and thus the bonding material can include a sintering material. For example, the bonding of the superabrasive particles to the metal support layer can include
10 disposing a sintering compound on the metal support layer in contact with at least one of the first monolayer and the second monolayer and sintering the sintering compound to bond the at least one of the first monolayer and the second monolayer to the metal support layer. Suitable sintering methods will be readily appreciated by one of ordinary skill in the art having possession of this disclosure. Basically, a sintering compound is applied around
15 the superabrasive particles and in contact with the metal support layer. The sintering compound can be any known sintering material that can be used to secure superabrasive particles to a substrate. Non-limiting examples of such materials can include metal and metal alloy powders, ceramic powders, and the like. One specific non-limiting example of a sintering compound is cobalt powder.

20 Once the sintering compound has been applied around the superabrasive particles and to the metal support substrate, heat and in some cases pressure can be applied to cause sintering to occur. In some aspects, a braze or braze alloy can be infiltrated into the sintering compound during bonding to further strengthen the bonding material matrix.

In another aspect, as is shown in FIG. 4, heat and pressure can be applied to bond
25 the first monolayer of superabrasive particles 42 and/or the second monolayer of superabrasive particles 46 directly into the metal support layer 44. Thus, upon the application of heat and pressure, the metal support layer 44 is softened or partially melted. The superabrasive particles in one or more of the monolayers are then pressed into the metal support layer. A planar leveling surface can be used to apply pressure to the

monolayer and thus maintain the level nature of the superabrasive particle tips as the superabrasive particles are pressed into the metal support layer. Upon cooling, the distribution of superabrasive particles on either side of the metal support layer at least partially equalizes the thermal forces acting on the metal support layer, thus minimizing warping.

In yet another aspect, as is shown in FIG. 5, a CMP pad dresser can include a first monolayer of superabrasive particles 52 and a second monolayer of superabrasive particles 56 coupled to a metal support layer 54. The superabrasive particles can be coupled to the metal support layer directly or via a bonding material. The second monolayer of superabrasive particles 56 is coupled to a rigid support 58. A portion of the rigid support 58 is shown removed in FIG. 5 to expose the second monolayer. The rigid support 58 can facilitate handling and use of the CMP pad dresser. By bonding the superabrasive particles of the second monolayer to the rigid support, the first monolayer of superabrasive particles remains exposed for CMP pad conditioning operations.

The rigid support can be made from any material compatible with the abrading or dressing process. Such materials can include polymeric materials, metal materials, ceramic materials, glasses, composites, and the like. In one aspect, the rigid support can be a polymeric material and the second monolayer of superabrasive particles can be embedded therein using heat, pressure, adhesives, etc. In some aspects, the rigid support can be a non-polymeric material such as a metal layer. In such cases, the superabrasive particles can be bonded to the rigid support by adhesive attachment, soldering, brazing, electroplating, and the like. For brazing techniques, care can be taken to minimize or eliminate warpage in the metal layer during the heating and cooling process. In another aspect, one or more magnetic elements can be placed into the rigid support to attract and hold the CMP pad dresser in place, thus forming a temporary attachment. An optional locking mechanism can be utilized to further immobilize the CMP pad dresser to the rigid support during use. In some aspects the rigid support can include surface features to hold the dresser in place during rotational movement against a CMP pad. The rigid support can have approximately the same diameter as the metal support layer, a larger diameter

than the metal support layer, or, in some cases, a smaller diameter than the metal support layer.

In another aspect, a CMP pad dresser can be comprised of a plurality of dressing segments having a plurality of leveled superabrasive particles tips, where the plurality of dressing segments are held in place by a rigid support. Such a design allows a plurality of smaller dressing segments to be manufactured having precisely leveled tips. Smaller diameter metal support layers in these dressing segments can be made by processes involving heat and/or pressure with less warpage due to their smaller size. For example, a 4 inch diameter metal disc can exhibit greater warping due to brazing as compared to a 0.5 inch diameter metal disc. Thus thermal distortion and particle floating problems are decreased. A plurality of such dressing segments can then be coupled to a larger diameter rigid support by processes that do not introduce significant warpage, such as bonding in an organic material. Such dressing segments can have one or more layer(s) of superabrasive particles coupled to a support layer. In one aspect, a segment can have a single layer of superabrasive particles coupled to a metal support layer. In another aspect, a segment can have a layer of superabrasive particles coupled to each side of a metal support layer, as has been described herein. Thus, this process allows the manufacture of CMP pad dressers that can have precise tip protrusion tolerances. Additionally, in one aspect, each dressing segment can have at least three superabrasive particles that protrude to the greatest extent. If the three highest protruding superabrasive particles on every dressing segment are leveled across the entire rigid support, a CMP pad dresser is made having very precise tip leveling across the entire surface. If, for example, ten dressing segments are used to make the CMP pad dresser, then the highest protruding thirty superabrasive particles in the tool will have effectively the same protrusion distance and be substantially leveled. Various additional details regarding dressing segments are detailed in U.S. Patent Application No. 13/034,213, filed February 24, 2011, which is hereby incorporated herein by reference.

Various organic materials are contemplated for use as a rigid support and/or to be used to secure the second monolayer of superabrasive particles and/or the dressing segments to the rigid support. Examples of suitable organic matrix materials include,

without limitation, amino resins, acrylate resins, alkyd resins, polyester resins, polyamide resins, polyimide resins, polyurethane resins, phenolic resins, phenolic/latex resins, epoxy resins, isocyanate resins, isocyanurate resins, polysiloxane resins, reactive vinyl resins, polyethylene resins, polypropylene resins, polystyrene resins, phenoxy resins, perylene resins, polysulfone resins, acrylonitrile-butadiene-styrene resins, acrylic resins, polycarbonate resins, polyimide resins, and mixtures thereof. In one specific aspect, the organic material can be an epoxy resin. In another aspect, the organic material can be a polyimide resin. In yet another aspect, the organic material can be a polyurethane resin.

Additionally, so-called “reverse casting” methods can be used to accurately orient and attach the dressing segments to the rigid support. Such methods can include initially securing the plurality of dressing segments to a substrate using a “mask” material. The portions of the dressing segments protruding from the mask material can then be attached to the rigid support using the methods discussed herein, after which (or during which), the masking material can be removed.

When an organic material is utilized, methods of curing the organic material can be a variety of processes known to one skilled in the art that cause a phase transition in the organic material from at least a pliable state to at least a rigid state. Curing can occur, without limitation, by exposing the organic material to energy in the form of heat, electromagnetic radiation, such as ultraviolet, infrared, and microwave radiation, particle bombardment, such as an electron beam, organic catalysts, inorganic catalysts, or any other curing method known to one skilled in the art.

In one aspect of the present invention, the organic material can be a thermoplastic material. Thermoplastic materials can be reversibly hardened and softened by cooling and heating respectively. In another aspect, the organic material layer may be a thermosetting material. Thermosetting materials cannot be reversibly hardened and softened as with the thermoplastic materials. In other words, once curing has occurred, the process can be essentially irreversible, if desired.

As a more detailed list of what is described above, organic materials that may be useful in embodiments of the present invention include, but are not limited to: amino resins

including alkylated urea-formaldehyde resins, melamine-formaldehyde resins, and alkylated benzoguanamine-formaldehyde resins; acrylate resins including vinyl acrylates, acrylated epoxies, acrylated urethanes, acrylated polyesters, acrylated acrylics, acrylated polyethers, vinyl ethers, acrylated oils, acrylated silicones, and associated methacrylates; alkyd resins
5 such as urethane alkyd resins; polyester resins; polyamide resins; polyimide resins; reactive urethane resins; polyurethane resins; phenolic resins such as resole and novolac resins; phenolic/latex resins; epoxy resins such as bisphenol epoxy resins; isocyanate resins; isocyanurate resins; polysiloxane resins including alkylalkoxysilane resins; reactive vinyl resins; resins marketed under the BakeliteTM trade name, including polyethylene resins,
10 polypropylene resins, epoxy resins, phenolic resins, polystyrene resins, phenoxy resins, perylene resins, polysulfone resins, ethylene copolymer resins, acrylonitrile-butadiene-styrene (ABS) resins, acrylic resins, and vinyl resins; acrylic resins; polycarbonate resins; and mixtures and combinations thereof. In one aspect of the present invention, the organic material may be an epoxy resin. In another aspect, the organic material may be a
15 polyimide resin. In yet another aspect, the organic material may be a polyurethane resin.

Numerous additives may be included in the organic material to facilitate its use. For example, additional crosslinking agents and fillers may be used to improve the cured characteristics of the organic material layer. Additionally, solvents may be utilized to alter the characteristics of the organic material in the uncured state. Also, a reinforcing material
20 may be disposed within at least a portion of the solidified organic material layer. Such reinforcing material may function to increase the strength of the organic material layer, and thus further improve the retention of the individual abrasive segments. In one aspect, the reinforcing material may include ceramics, metals, or combinations thereof. Examples of ceramics include alumina, aluminum carbide, silica, silicon carbide, zirconia, zirconium
25 carbide, and mixtures thereof.

Additionally, in one aspect a coupling agent or an organometallic compound may be coated onto the surface of a superabrasive material to facilitate the retention of the superabrasive particles in the organic material via chemical bonding. A wide variety of organic and organometallic compounds is known to those of ordinary skill in the art and

may be used. Organometallic coupling agents can form chemical bonds between the superabrasive materials and the organic material, thus increasing the retention of the superabrasive materials therein. In this way, the organometallic coupling agent can serve as a bridge to form bonds between the organic material and the surface of the superabrasive material. In one aspect of the present invention, the organometallic coupling agent can be a titanate, zirconate, silane, or mixture thereof. The amount of organometallic coupling agent used can depend upon the coupling agent and on the surface area of the superabrasive material. Oftentimes, 0.05% to 10% by weight of the organic material layer can be sufficient.

Specific non-limiting examples of silanes suitable for use in the present invention include: 3- glycidoxypropyltrimethoxy silane (available from Dow Corning as Z-6040); γ -methacryloxy propyltrimethoxy silane (available from Union Carbide Chemicals Company as A-174); β -(3,4-epoxycyclohexyl)ethyltrimethoxy silane, γ -aminopropyltriethoxy silane, N-(β -aminoethyl)- γ -aminopropylmethyldimethoxy silane (available from Union Carbide, Shin-etsu Kagaku Kogyo K.K., etc.). Specific non-limiting examples of titanate coupling agents include: isopropyltriisostearoyl titanate, di(cumylphenylate)oxyacetate titanate, 4-aminobenzenesulfonyldodecylbenzenesulfonyl titanate, tetraoctylbis (ditridecylphosphite) titanate, isopropyltri(N-ethylamino-ethylamino) titanate (available from Kenrich Petrochemicals, Inc.), neoalkoxy titanates such as LICA-01, LICA-09, LICA-28, LICA-44 and LICA-97 (also available from Kenrich), and the like. Specific non-limiting examples of aluminum coupling agents include acetoalkoxy aluminum diisopropylate (available from Ajinomoto K.K.), and the like. Specific non-limiting examples of zirconate coupling agents include: neoalkoxy zirconates, LZ-01, LZ-09, LZ-12, LZ-38, LZ-44, LZ-97 (all available from Kenrich Petrochemicals, Inc.), and the like. Other known organometallic coupling agents, e.g., thiolate based compounds, can be used in the present invention and are considered within the scope of the present invention.

In other aspects of the present disclosure, superabrasive particle tips can be leveled by reducing the protrusions of particles that are outside of the desired tolerance range. Once such particles are identified, various techniques can be utilized to reduce such

protrusions. In one aspect, for example, mechanical abrasion of the dresser can reduce the protruding particles. In another aspect, a vibration tool can be used to individually break such particles. In yet another aspect, a laser such as a Nd:YAG laser can be used to disrupt such particles.

5 In another aspect of the present disclosure, a method of making a CMP pad dresser can include disposing a first monolayer of superabrasive particles on a metal support layer, and disposing a second monolayer of superabrasive particles on the metal support layer on a side opposite the first monolayer. The superabrasive particles of the second monolayer are positioned to have substantially the same distribution as the
10 superabrasive particles of the first monolayer. The method can further include bonding the first monolayer of superabrasive particles and the second monolayer of superabrasive particles to the metal support layer such that symmetrical forces due to the substantially similar distribution between the first monolayer and the second monolayer precludes substantial warping of the metal support layer.

15 In yet another aspect, disposing at least one of the first monolayer of superabrasive particles or the second monolayer of superabrasive particles can include adhering a plurality of superabrasive particles to an adhesive transfer sheet in a predetermined pattern established by apertures in a template, and removing the template from the adhesive transfer sheet such that the plurality of superabrasive particles remain adhered to the
20 adhesive transfer sheet in the predetermined pattern. The plurality of superabrasive particles is then transferred with the adhesive transfer sheet to the metal support layer, and the adhesive transfer sheet is removed from the plurality of superabrasive particles to form at least one of the first monolayer of superabrasive particles or the second monolayer of superabrasive particles.

25 In a further aspect of the present disclosure, a method of minimizing warpage of a CMP pad dresser during manufacture can include substantially equalizing warping forces on opposing sides of a metal support layer during bonding of a plurality of superabrasive particles thereto, wherein warpage of the support layer is minimized during bonding due to the equalized forces on opposing sides. In one aspect, substantially equalizing forces

includes arranging the plurality of superabrasive particles on opposing sides of the support layer such that the plurality of superabrasive particles has substantially the same distribution on either side of the support layer to substantially equalize warping forces during bonding.

5 In yet a further aspect of the present disclosure, a CMP pad dresser can include a plurality of superabrasive particles arranged as a working surface, where the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the first monolayer of superabrasive particles is less than or equal to about 20 microns, and where the difference in protrusion distance between the highest 1% of the protruding
10 tips of the first monolayer of superabrasive particles, excluding the highest protruding tip, are within about 80 microns.

 It is noted that, while the above disclosure refers primarily to CMP pad dressers, other precision grinding and/or abrading tools are considered to be within the present scope. As such, the techniques and teaching disclosed herein can additionally be applied
15 to such tools.

 Of course, it is to be understood that the above-described arrangements are only illustrative of the application of the principles of the present invention. Numerous modifications and alternative arrangements may be devised by those skilled in the art without departing from the spirit and scope of the present invention and the appended claims are
20 intended to cover such modifications and arrangements. Thus, while the present invention has been described above with particularity and detail in connection with what is presently deemed to be the most practical and preferred embodiments of the invention, it will be apparent to those of ordinary skill in the art that numerous modifications, including, but not limited to, variations in size, materials, shape, form, function and manner of operation,
25 assembly and use may be made without departing from the principles and concepts set forth herein.

CLAIMS

What is claimed is:

1. A CMP pad dresser, comprising:
 - 5 a matrix layer;
 a monolayer of a plurality of superabrasive particles embedded in the matrix layer, wherein each superabrasive particle in the monolayer protrudes from the matrix layer, and wherein the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the monolayer of superabrasive particles is less than or equal
10 to about 20 microns and the difference in protrusion distance between the highest 1% of the protruding tips of the monolayer of superabrasive particles are within about 80 microns or less.
- 15 2. The dresser of claim 1, further comprising a rigid support coupled to the matrix layer.
3. The dresser of claim 1, wherein the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the monolayer of superabrasive particles is less than or equal to about 15 microns.
- 20 4. The dresser of claim 1, wherein the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the monolayer of superabrasive particles is less than or equal to about 10 microns.
5. The dresser of claim 1, wherein the difference in protrusion distance between the
25 highest 10 protruding tips of the monolayer of superabrasive particles are within about 30 microns or less.

6. The dresser of claim 1, wherein the difference in protrusion distance between the highest 100 protruding tips of the monolayer of superabrasive particles are within about 50 microns or less.
- 5 7. The dresser of claim 1, wherein the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are within about 50 microns or less.
8. A CMP pad dresser, comprising:
- 10 a first monolayer of superabrasive particles disposed on one side of a metal support layer;
- a second monolayer of superabrasive particles disposed on the metal support layer on an opposite side from the first monolayer, wherein the superabrasive particles of the second monolayer are positioned to have substantially the same distribution as the
- 15 superabrasive particles of the first monolayer; and
- a rigid support coupled to the second monolayer of superabrasive particles opposite the first monolayer.
9. The dresser of claim 8, wherein the difference in protrusion distance between the
- 20 highest protruding tip and the next highest protruding tip of the first monolayer of superabrasive particles is less than or equal to about 20 microns.
10. The dresser of claim 9, wherein the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are
- 25 within about 80 microns.
11. The dresser of claim 9, wherein the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are within about 50 microns.

12. The dresser of claim 8, wherein the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles are within about 50 microns.

5

13. The dresser of claim 8, wherein the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the first monolayer of superabrasive particles is less than or equal to about 10 microns.

10 14. A method of making a CMP pad dresser, comprising:

disposing a first monolayer of superabrasive particles on a metal support layer;

disposing a second monolayer of superabrasive particles on the metal support layer on a side opposite the first monolayer, wherein the superabrasive particles of the second monolayer are positioned to have substantially the same distribution as the superabrasive particles of the first monolayer; and

15

bonding the first monolayer of superabrasive particles and the second monolayer of superabrasive particles to the metal support layer such that symmetrical forces due to the substantially similar distribution between the first monolayer and the second monolayer precludes substantial warping of the metal support layer.

20

15. The method of claim 14, wherein the bonding of at least one of the first monolayer and the second monolayer is by brazing with a braze material.

16. The method of claim 14, wherein the bonding of at least one of the first monolayer and the second monolayer is under heat and pressure.

25

17. The method of claim 16, wherein the bonding of at least one of the first monolayer and the second monolayer further includes:

disposing a sintering compound on the metal support layer in contact with at least one of the first monolayer and the second monolayer; and

sintering the sintering compound to bond the at least one of the first monolayer and the second monolayer to the metal support layer.

5

18. The method of claim 17, further comprising infiltrating the sintering compound with a braze material during bonding.

19. The method of claim 16, wherein the heat and pressure bonds at least one of the first
10 monolayer and the second monolayer directly to the metal support layer.

20. The method of claim 14, wherein the superabrasive particles of the second monolayer are positioned to substantially align with the superabrasive particles of the first monolayer.

15 21. The method of claim 14, further comprising coupling the second monolayer of superabrasive particles to a rigid support.

22. The method of claim 21, wherein the coupling of the second monolayer of superabrasive particles to the rigid support is accomplished by a member selected from the
20 group consisting of hot pressing, brazing, sintering, soldering, electroplating, and combinations thereof.

23. The method of claim 21, wherein the coupling of the second monolayer of superabrasive particles to the rigid support is accomplished by polymeric bonding.

25

24. The method of claim 14, wherein disposing at least one of the first monolayer of superabrasive particles or the second monolayer of superabrasive particles includes:

adhering a plurality of superabrasive particles to an adhesive transfer sheet in a predetermined pattern established by apertures in a template;

removing the template from the adhesive transfer sheet such that the plurality of superabrasive particles remain adhered to the adhesive transfer sheet in the predetermined pattern;

transferring the plurality of superabrasive particles with the adhesive transfer sheet
5 to the metal support layer; and

removing the adhesive transfer sheet from the plurality of superabrasive particles to form at least one of the first monolayer of superabrasive particles or the second monolayer of superabrasive particles.

10 25. A method of minimizing warpage of a CMP pad dresser during manufacture, comprising:

substantially equalizing warping forces on opposing sides of a metal support layer during bonding of a plurality of superabrasive particles thereto, wherein warpage of the support layer is minimized during bonding due to the equalized forces on opposing sides.

15

26. The method of claim 25, wherein substantially equalizing forces includes arranging the plurality of superabrasive particles on opposing sides of the support layer such that the plurality of superabrasive particles has substantially the same distribution on either side of the support layer to substantially equalize warping forces during bonding.

20

27. A CMP pad dresser, comprising:

a plurality of superabrasive particles arranged as a working surface, wherein the difference in protrusion distance between the highest protruding tip and the next highest protruding tip of the first monolayer of superabrasive particles is less than or equal to
25 about 20 microns, and wherein the difference in protrusion distance between the highest 1% of the protruding tips of the first monolayer of superabrasive particles, excluding the highest protruding tip, are within about 80 microns.

ABSTRACT

CMP pad dressers having leveled tips and associated methods are provided. In one aspect, for example, a CMP pad dresser can include a matrix layer and a monolayer of a plurality of superabrasive particles embedded in the matrix layer, where each

5 superabrasive particle in the monolayer protrudes from the matrix layer. The difference in the protrusion distance between the highest protruding tip and the next highest protruding tip of the monolayer of superabrasive particles is less than or equal to about 20 microns, and the difference in protrusion distance between the highest 1% of the protruding tips of the monolayer of superabrasive particles are within about 80 microns or less.

10

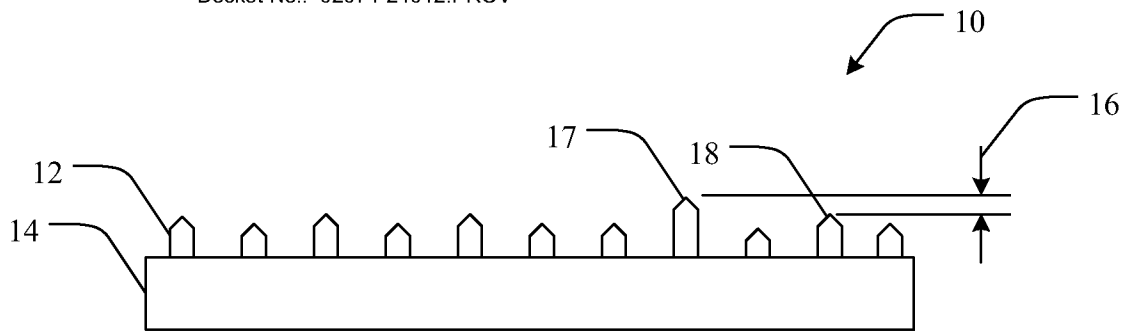


FIG. 1

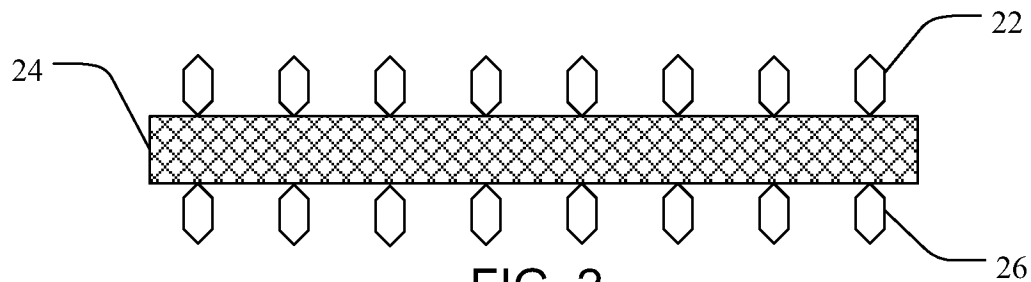


FIG. 2

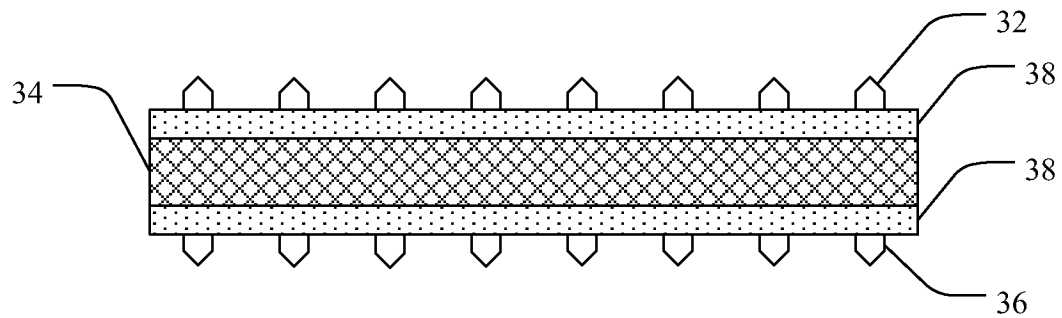


FIG. 3

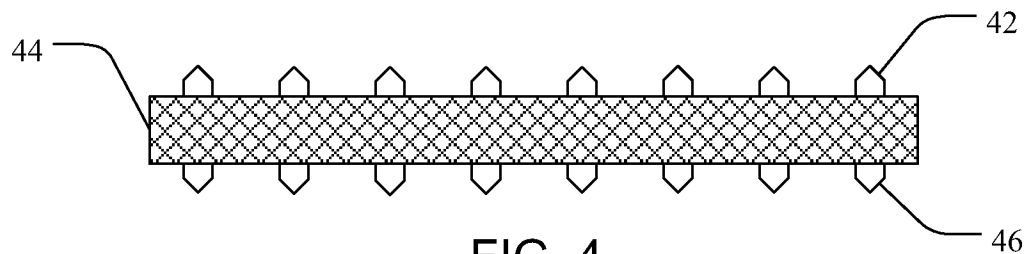


FIG. 4

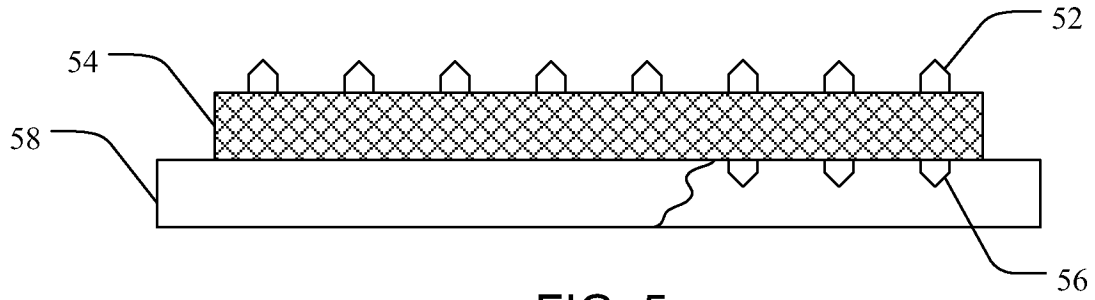


FIG. 5

Electronic Patent Application Fee Transmittal				
Application Number:				
Filing Date:				
Title of Invention:		CMP Pad Dresser Having Leveled Tips and Associated Methods		
First Named Inventor/Applicant Name:		Chien-Min Sung		
Filer:		David William Osborne/Nicole Solomon		
Attorney Docket Number:		02074-24012.PROV		
Filed as Small Entity				
Provisional Filing Fees				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Provisional Application filing fee	2005	1	110	110
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Total in USD (\$)				110

Electronic Acknowledgement Receipt

EFS ID:	10149416
Application Number:	61489074
International Application Number:	
Confirmation Number:	9927
Title of Invention:	CMP Pad Dresser Having Leveled Tips and Associated Methods
First Named Inventor/Applicant Name:	Chien-Min Sung
Customer Number:	20551
Filer:	David William Osborne/Nicole Solomon
Filer Authorized By:	David William Osborne
Attorney Docket Number:	02074-24012.PROV
Receipt Date:	23-MAY-2011
Filing Date:	
Time Stamp:	16:26:23
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$110
RAM confirmation Number	3436
Deposit Account	
Authorized User	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part Zip	Pages (if appl.)
-----------------	----------------------	-----------	-------------------------------------	-------------------	---------------------

1	Provisional Cover Sheet (SB16)	24012PROVtransmittal.pdf	920580 97995f3609c6cfdb577289e4d09b9f062999cf99	no	2
Warnings:					
This is not a USPTO supplied Provisional Cover Sheet SB16 form.					
Information:					
2		24012PROVapplication.pdf	139282 3b09e4180e0dae5ab8b1e7ca508e16b09abb3655	yes	29
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	23	
	Claims		24	28	
	Abstract		29	29	
Warnings:					
Information:					
3	Drawings-only black and white line drawings	24012PROVdrawings.pdf	24481 70233e90388bd4d69d97432a580f5ee299b81c38	no	2
Warnings:					
Information:					
4	Fee Worksheet (PTO-875)	fee-info.pdf	29392 4f422f9329570b66199ec7a2ffccdf4c60d1501d	no	2
Warnings:					
Information:					
Total Files Size (in bytes):			1113735		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.