



US 20040065894A1

(19) **United States**(12) **Patent Application Publication**
Hashimoto et al.(10) **Pub. No.: US 2004/0065894 A1**(43) **Pub. Date: Apr. 8, 2004**(54) **LIGHT EMITTING DEVICE USING LED**(52) **U.S. Cl. 257/100; 257/98; 257/99**(76) Inventors: **Takuma Hashimoto**, Yawata-shi (JP);
Masaru Sugimoto, Osaka-shi (JP);
Hideyoshi Kimura, Hirakata-shi (JP);
Eiji Shiohama, Katano-shi (JP)(57) **ABSTRACT**

Correspondence Address:

GREENBLUM & BERNSTEIN, P.L.C.
1950 ROLAND CLARKE PLACE
RESTON, VA 20191 (US)(21) Appl. No.: **10/466,114**(22) PCT Filed: **Aug. 28, 2002**(86) PCT No.: **PCT/JP02/08697**(30) **Foreign Application Priority Data**

Aug. 28, 2001 (JP) 2001-258680

Nov. 6, 2001 (JP) 2001-340832

Publication Classification(51) **Int. Cl.⁷ H01L 33/00**

A light emitting device that can provide enhanced heat radiation as well as allowing light from a light emitting diode (LED) chip to be efficiently extracted out of the device. This light emitting device includes a metal plate (11) that is made of aluminum. The metal plate (11) has a projection (11a) projecting forward. The projection (11a) has a front side provided with a housing recess (11b). An LED chip (1) is mounted on the bottom of the housing recess (11b) so that it is thermally coupled to the metal plate (11), thus allowing heat to be radiated efficiently. A printed circuit board (12), having a glass epoxy substrate to be joined to the front surface of the metal plate (11), is provided with an insertion hole (13) into which the projection (11a) is inserted. The LED chip (1) and a bonding wire (W) are encapsulated in a transparent resin seal portion (50). The side wall of the housing recess (11b) that is part of the metal plate (11) functions as a reflector for reflecting forward light emitted from the LED chip (1). Thus, light from the LED chip (1) can be extracted efficiently.

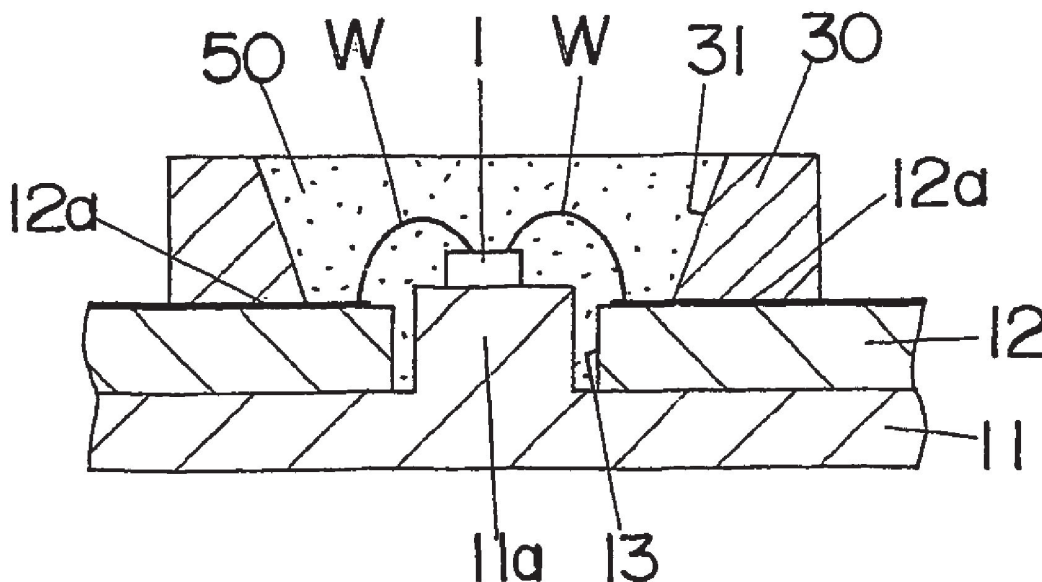


FIG. 1

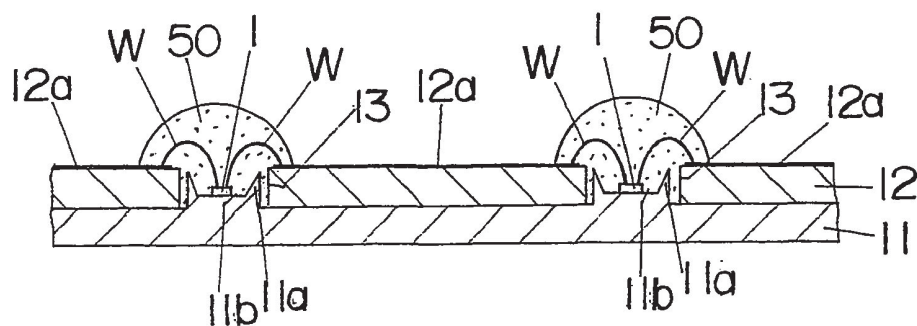


FIG. 2

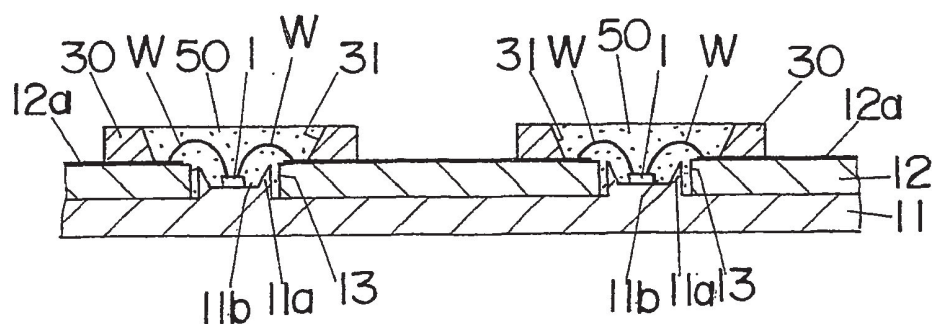


FIG. 3

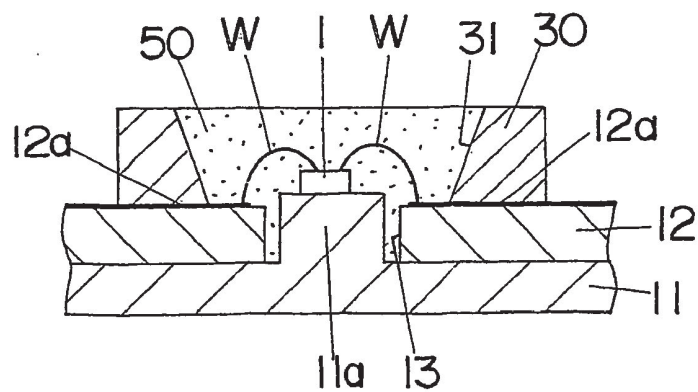


FIG. 4

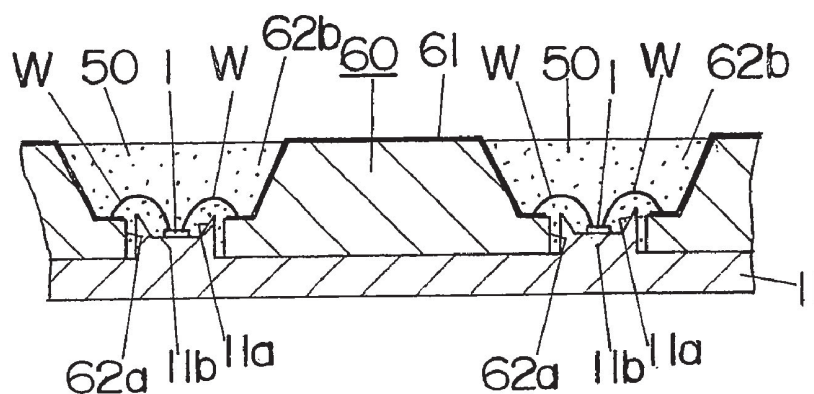


FIG. 5

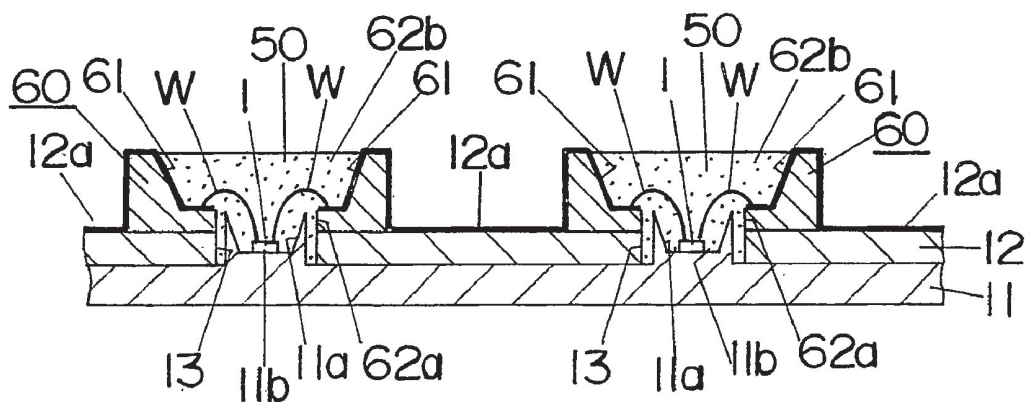


FIG. 6

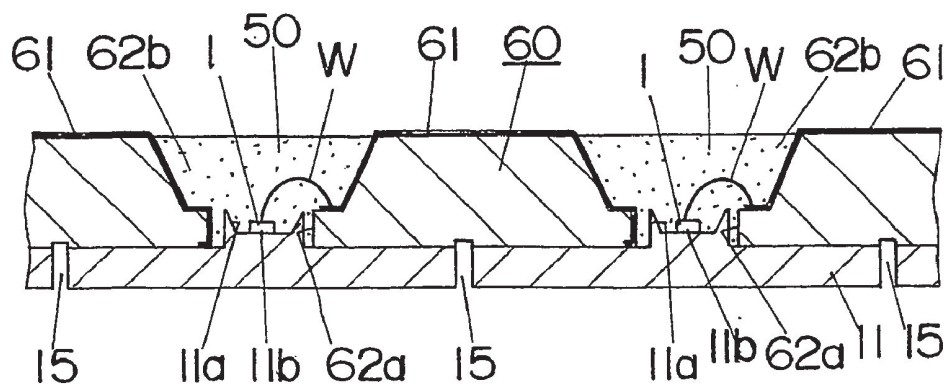


FIG. 10

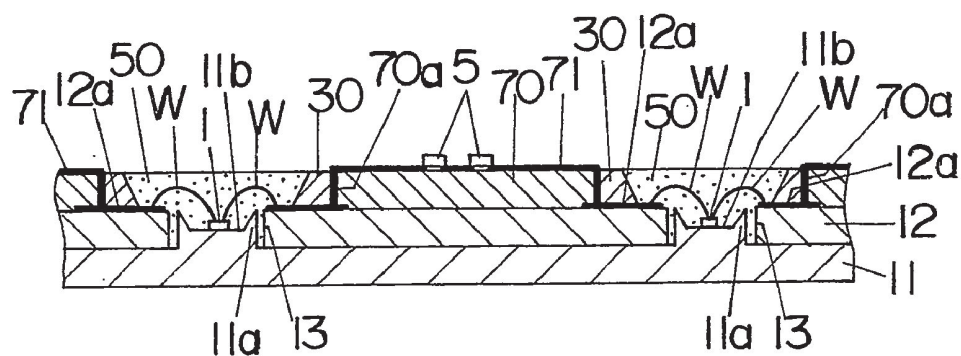


FIG. 11

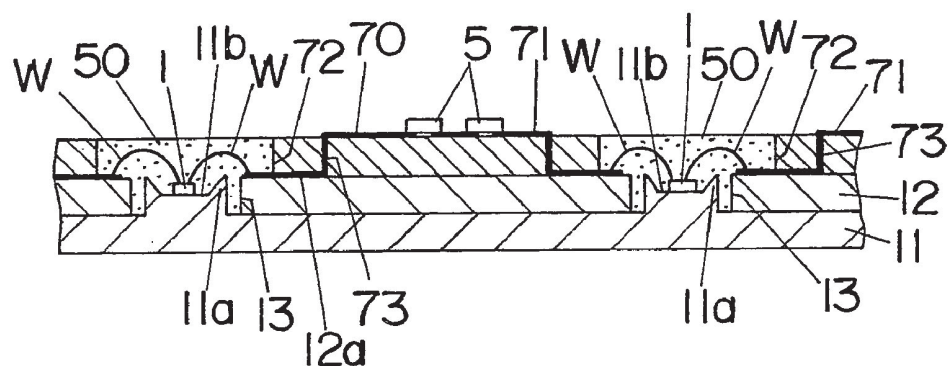


FIG. 12

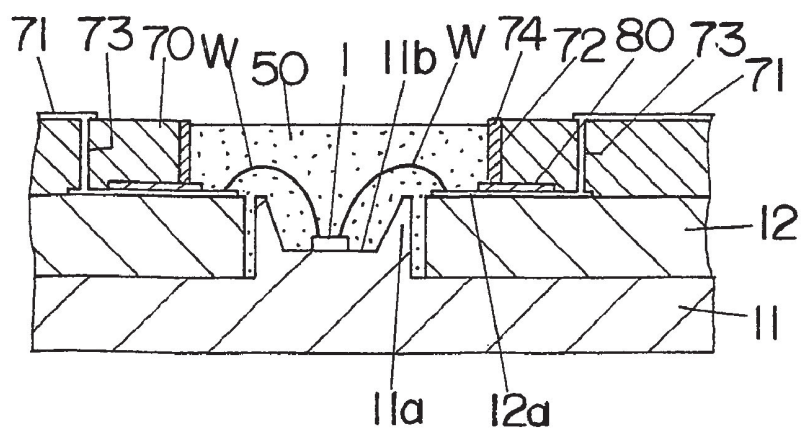


FIG. 13A

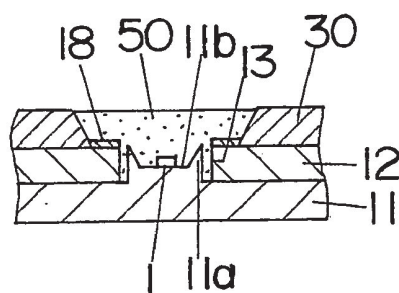


FIG. 13B

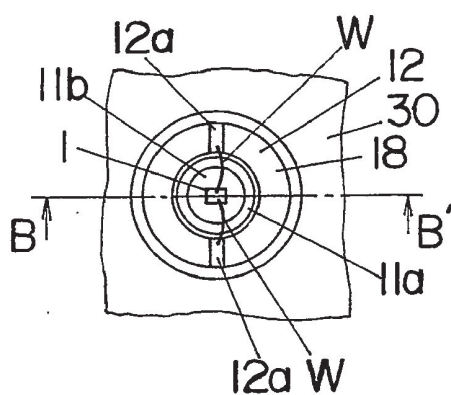


FIG. 14

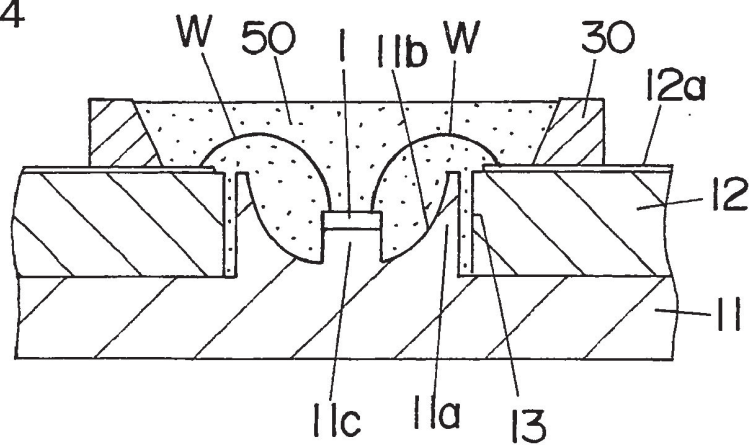


FIG. 15

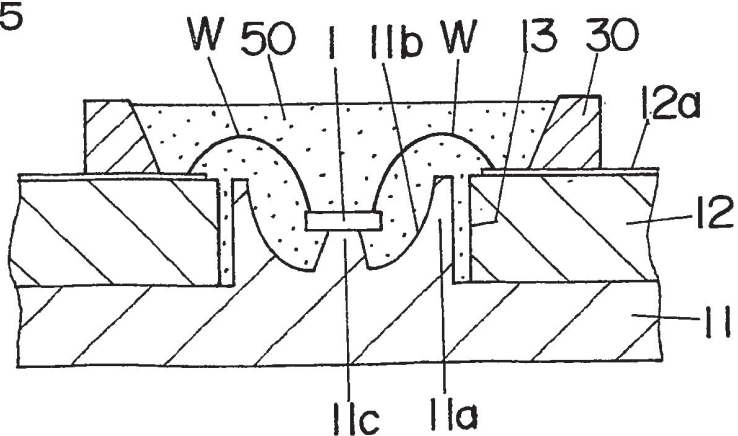


FIG. 18A


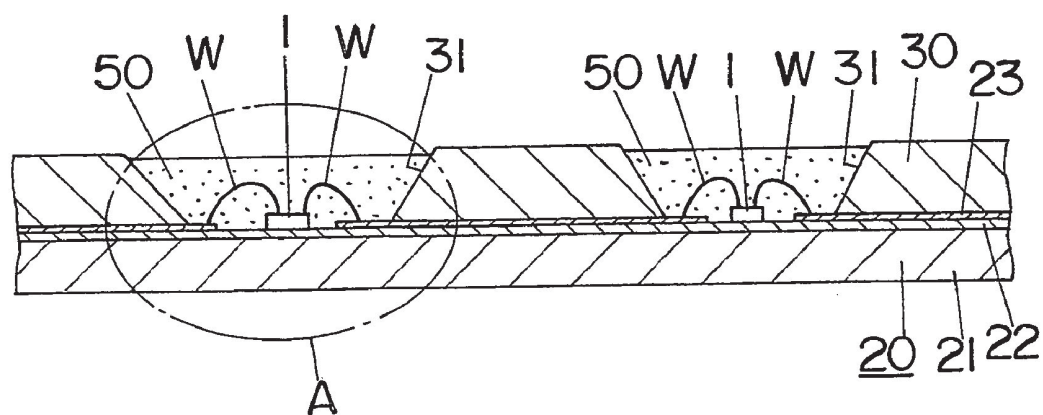


FIG. 18B

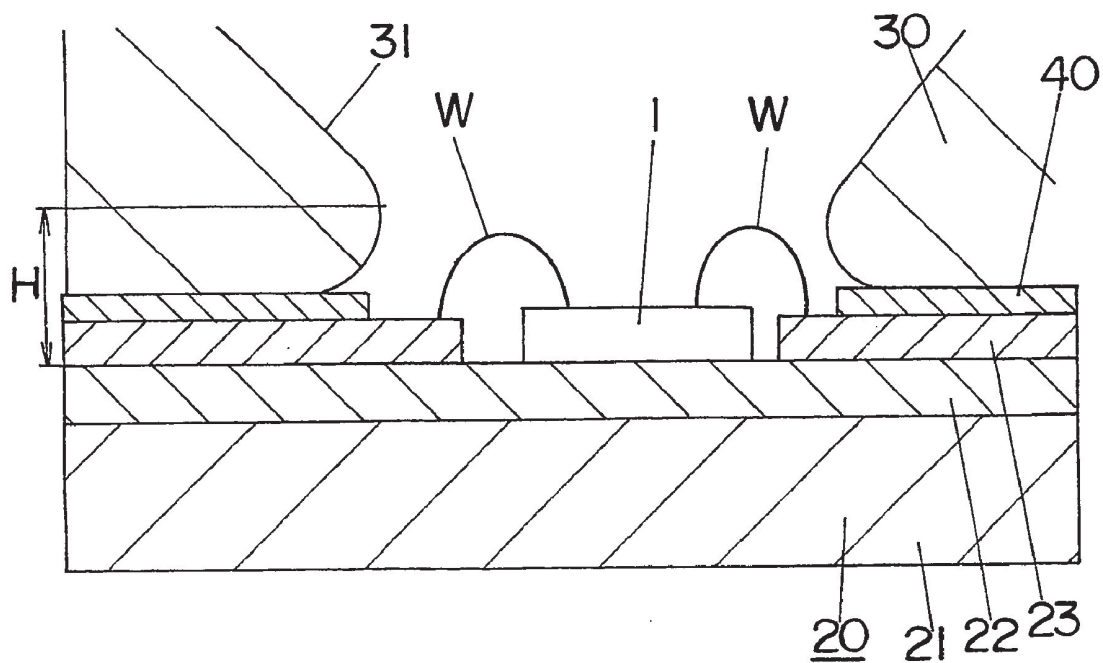

LIGHT EMITTING DEVICE USING LED

TECHNICAL FIELD

[0001] The present invention relates to light emitting devices using light emitting diode (LED) chips.

BACKGROUND ART

[0002] A light emitting device using a light emitting diode chip has been conventionally proposed that is shown in **FIGS. 18A and 18B**. In the conventional device, the light emitting diode chip (hereinafter, referred to as LED chip) **1** is mounted on a metal mounting board **20** that includes a metal plate **21** made of a metal with a high thermal conductivity, e.g. aluminum, an insulating layer **22** made of an insulating resin material, e.g. glass epoxy and provided on a surface of the metal plate, and a wiring portion (wiring pattern) **23** that is a copper foil provided on the insulating layer **22**.

[0003] The LED chip **1** is electrically connected with the wiring portion **23** through a bonding wire **W**. The LED chip **1** includes, for example, a sapphire substrate and a gallium nitride light emitting portion provided on the sapphire substrate.

[0004] The conventional light emitting device includes a frame member **30** that has a round hole around the LED chip **1**. The frame member **30** is adhered to the metal mounting board **20** via an adhesive layer **40** (shown in **FIG. 18B**). The hole in the frame member **30** is filled with a transparent sealing resin such as epoxy resin, silicone resin, or the like, in which the LED chip **1** is encapsulated. Light emitted from the LED chip **1** is extracted forward (upward in **FIG. 18A**) through a resin seal portion **50** of the sealing resin filled in the hole in the frame member **30**. The inside diameter of the round hole in the frame member **30** mainly decreases with distance from the top of the hole so that the hole has inverted trapezoidal cross section, but in the vicinity of the metal mounting board **20**, the inside diameter increases toward the metal mounting board **20** as shown in **FIG. 18B**.

[0005] In the light emitting device, the LED chip **1** is mounted on the metal mounting board **20** with a high thermal conductivity that includes the metal plate **21** and the insulating layer **22** of about $100\text{ }\mu\text{m}$ thickness. Therefore, the light emitting device allows heat generated at the LED chip **1** to be easily radiated to the outside, as compared to a device where a surface mount LED having an LED chip therein is mounted on a circuit board. Thus, the light emitting device can advantageously protect the LED chip **1** from temperature rise that may cause decrease of the luminous efficiency, decrease of the operating life, and deterioration of the resin seal portion **50**.

[0006] The frame member **30** is made of a white resin so that its inside wall **31** functions as a reflector. Light from the LED chip **1** can be reflected on the inside wall **31** of the frame member **30** to be directed forward, thus efficiently extracted from the light emitting device to the outside.

[0007] However, in the conventional light emitting device, the LED chip **1** is not mounted directly on the metal plate **21**, but it is mounted over the metal plate with the insulating layer **22**, which is lower in thermal conductivity than the metal plate **21** and has about $100\text{ }\mu\text{m}$ thickness, provided between them. Therefore, heat radiation of the light emitting

device decreases, as compared to the case where the LED chip is mounted directly on the metal plate **21**.

[0008] Additionally, the conventional light emitting device has the following disadvantage in the efficiency of light extraction from the LED chip **1**. If the LED chip **1** is positioned deeper than the region of the round hole in the frame member **30** where the radius is the smallest, light from the LED chip **1** is partially blocked, thus failing to be extracted efficiently. With reference to the surface of the insulating layer **22**, the surface of the LED chip **1** is at a height of about $80\text{ }\mu\text{m}$, the thickness of the chip. The height **H** from the reference plane to the region of the frame member **30** where the radius of the hole is the smallest is about $300\text{ }\mu\text{m}$ that is the sum of the thickness of the adhesive layer **40**, the thickness of the wiring portion **23** (the thickness of the copper foil), and the thickness of the portion of the frame member **30** where the inside diameter of the hole increases toward the metal mounting board. In other words, the inside wall **31** of the frame member **30** that functions as a reflector is located away as compared to the surface of the LED chip

[0009] 1. Thus, efficient reflection of light cannot be provided.

[0010] In the case where the LED chip **1** has a transparent substrate such as sapphire substrate or the like, light emitted from the light emitting portion of the LED chip **1** is partially directed sideward. Therefore, the conventional light emitting device is disadvantageous in that light emitted sideward from the LED chip **1** fails to be efficiently extracted to the outside.

[0011] There may be a case where part of the insulating layer **22** is removed so that the LED chip **1** can be mounted on the metal plate **21** in order to improve heat radiation. In such a case, the thickness of portions that fail to function as a reflector (ineffective portions) increases by the thickness of the insulating layer **22** (about $100\text{ }\mu\text{m}$), in addition to the height **H**. This further decreases the efficiency of extraction of light emitted sideward from the LED chip **1**.

[0012] In the conventional light emitting device, the frame member **30** is made of a white resin for enhancing the light extraction efficiency. However, when heated in mounting process of the LED chip **1**, the white resin may be oxidized to be colored, thus decreased in the reflecting ability. Further, in the case where an LED chip emitting blue light is employed as the LED chip **1**, blue light emitted from the LED chip **1** may cause the frame member **30** of resin to deteriorate to be colored and thus decreased in the reflecting ability.

[0013] The present invention has been developed in view of the above mentioned problems, and it is an object of the present invention to provide a light emitting device that can enhance heat radiation while allowing light from a light emitting diode chip to be efficiently extracted to the outside, as compared to conventional devices.

DISCLOSURE OF THE INVENTION

[0014] In order to solve the above mentioned problems, an aspect of the present invention provides a light emitting device using an LED, comprising: a metal plate having a projection projecting forward, the projection having a front side provided with a housing recess; a light emitting diode

chip disposed on a bottom of the housing recess to be thermally coupled to the metal plate; an insulating substrate having an insertion hole into which the projection is inserted, the insulating substrate being joined to the metal plate in layers; a light-transmissible sealing resin in which the light emitting diode chip is encapsulated.

[0015] In this structure, the light emitting diode chip is placed on the bottom of the housing recess that is a part of the metal plate so as to be thermally coupled to the metal plate. Therefore, the heat radiation can be enhanced as compared to a conventional device where a chip is mounted through the insulating layer. This can protect the light emitting diode chip from temperature rise that may cause decrease of the luminous efficiency, decrease of the operating life, and deterioration of the sealing resin. The inner surface of the housing recess, which is a part of the metal plate, functions as a light reflector so that light emanated from the light emitting diode chip can be reflected on the inner surface of the housing recess for extraction out of the housing recess. Thus, the light extraction efficiency can be increased. Since the light reflector is made of metal, not resin, it can be prevented from decrease in the reflecting ability due to heating in mounting process of the light emitting diode chip or due to exposure to light from the light emitting diode chip in making the device in use.

[0016] In the improved light emitting device, preferably, the insulating substrate has a resin filled portion in which at least part of the sealing resin is filled. This allows the encapsulation to be easily performed by using a resin suitable for molding, e.g. epoxy resin or silicone resin, as the sealing resin.

[0017] Preferably, the light emitting device further comprises a frame member joined to a front surface of the insulating substrate so as to surround the insertion hole, and the sealing resin is filled in the resin filled portion and the frame member. This arrangement can easily and economically provide a space to be filled with the sealing resin as well as ensuring the resin filling.

[0018] Preferably, in the light emitting device, the insulating substrate is a three-dimensional molded circuit board having a wiring portion extended along a peripheral surface of the resin filled portion for electrical connection to the light emitting diode chip. This allows the three-dimensional resin filled portion to be formed integrally with the insulating substrate, thus facilitating not only the assembling but also the electrical connection between the light emitting diode chip and the wiring portion.

[0019] In the improved light emitting device, preferably, the metal plate serves as a part of the wiring portion for electrical connection to the light emitting diode chip. This allows a light emitting diode chip having electrodes at both sides in the direction of the thickness to be mounted on the bottom of the housing recess so that the electrode arranged at the rear side of the chip can be connected to the electric wiring.

[0020] In the improved light emitting device, preferably, the housing recess has an inner surface provided with a reflecting film of a metal with a reflectance higher than a reflectance of the metal plate. In this arrangement, the function of the metal plate and the function of the reflector can be provided separately. Therefore, the material used for

the metal plate can be selected from a variety of materials. For example, the metal plate can be made of a material selected in view of the adhesive property with respect to the insulating substrate or in view of the thermal conductivity.

[0021] In the light emitting device, preferably, the frame member has an inside wall provided with a reflecting film of a metal with a reflectance higher than a reflectance of the frame member. This allows light emitted from the light emitting diode chip to be efficiently extracted out of the device.

[0022] Preferably, the light emitting device further comprises a circuit component mounting substrate joined to the front surface of the insulating substrate alongside of the frame member, the circuit component mounting substrate having a front surface provided with a wiring portion. Further, it is preferable that the circuit component mounting substrate has a thickness such that the frame member is prevented from protruding forward beyond the circuit component mounting substrate. This allows a surface-mount circuit component to be easily mounted at the front side of the circuit component mounting substrate by a reflow process.

[0023] Preferably, in the light emitting device, the insulating substrate has a reflector, of which reflectance is higher than the insulating substrate, on a front surface thereof inside the frame member. This can provide further increased efficiency of light extraction from the light emitting diode chip to the outside.

[0024] In the improved light emitting device, preferably, the housing recess has a periphery configured to be a segment of a paraboloid of revolution. This allows light emitted sideward or backward from the light emitting diode chip to be efficiently reflected and directed forward, thus providing further increased efficiency of light extraction from the light emitting diode chip to the outside.

[0025] In the improved light emitting device, preferably, the insulating substrate has a portion on which the metal plate is not layered, the portion of the insulating substrate having a back at which circuit components are mounted. This allows even a lead-mount circuit component to be mounted without the risk of a short-circuit via the metal plate. Further, since light emitted from the light emitting diode chip is prevented from being absorbed in or reflected on the circuit component, the light can be extracted to the outside further efficiently.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] FIG. 1 is a schematic cross sectional view of a light emitting device according to Embodiment 1 of the present invention.

[0027] FIG. 2 is a schematic cross sectional view of a light emitting device according to Embodiment 2 of the present invention.

[0028] FIG. 3 is a schematic cross sectional view of another example of the same.

[0029] FIG. 4 is a schematic cross sectional view of a light emitting device according to Embodiment 3 of the present invention.

[0030] FIG. 5 is a schematic cross sectional view of another example of the same.

[0031] FIG. 6 is a schematic cross sectional view of a light emitting device according to Embodiment 4 of the present invention.

[0032] FIG. 7 is a schematic cross sectional view of a light emitting device according to Embodiment 5 of the present invention.

[0033] FIG. 8 is a schematic cross sectional view of a light emitting device according to Embodiment 6 of the present invention.

[0034] FIG. 9 is a schematic cross sectional view of a light emitting device according to Embodiment 7 of the present invention.

[0035] FIG. 10 is a schematic cross sectional view of a light emitting device according to Embodiment 8 of the present invention.

[0036] FIG. 11 is a schematic cross sectional view of another example of the same.

[0037] FIG. 12 is a schematic cross sectional view of still another example of the same.

[0038] FIG. 13A is a schematic cross sectional view of a light emitting device according to Embodiment 9 of the present invention.

[0039] FIG. 13B is a schematic plan view of the light emitting device according to Embodiment 9 in a state before sealing resin is filled.

[0040] FIG. 14 is a schematic cross sectional view of a light emitting device according to Embodiment 10 of the present invention.

[0041] FIG. 15 is a schematic cross sectional view of another example of the same.

[0042] FIG. 16 is a schematic cross sectional view of a light emitting device according to Embodiment 11 of the present invention.

[0043] FIG. 17 is a schematic cross sectional view of an example shown for reference purposes in the same.

[0044] FIG. 18A is a schematic cross sectional view of a conventional light emitting device.

[0045] FIG. 18B is a magnified view of main portions of the conventional device that are denoted by A in FIG. 18A.

BEST MODES FOR EMBODYING THE INVENTION

[0046] Referring now to the accompanying drawings, preferred embodiments of the present invention will be described.

[0047] (Embodiment 1)

[0048] As shown in FIG. 1, a light emitting device according to this embodiment includes a metal plate 11 that is made of aluminum and has a plurality of cylindrical projections 11a each projecting forward (upward in FIG. 1) and a printed circuit board 12 that has a glass epoxy substrate as the insulating substrate and is joined, in layers, to the front surface of the metal plate 11. Each of the projections 11a has a front side provided with a housing recess 11b, in which a light emitting diode chip (hereinafter, referred to as an LED chip) 1 is accommodated. The LED

chip 1 is encapsulated in a transparent resin seal portion 50, together with a bonding wire W, which will be described below.

[0049] The housing recess 11b formed in the metal plate 11 is sized so that the LED chip 1 is mounted directly on the bottom of the recess while the depth of the recess is larger than the thickness of the LED chip 1.

[0050] The LED chip 1 is mounted (disposed) in a state where it is thermally coupled to the bottom face (lowermost part) of the housing recess 11b. In other words, the LED chip 1 is thermally coupled to the metal plate 11.

[0051] The housing recess 11b is configured to be circular, and the inside diameter increases with the distance from the bottom. In other words, the side wall of the housing recess 11b is outwardly tilted. This allows light from the LED chip 1 that is emitted sideward to be reflected on the tilted side wall of the housing recess 11b for extraction through the housing recess 1b.

[0052] The printed circuit board 12 has one side provided with a copper foil as a wiring portion (wiring pattern) 12a while being adhered to the metal plate 11 at the other side. The printed circuit board 12 has, in the direction of the thickness, a plurality of insertion holes 13 in which the projections 11a of the metal plate 11 are inserted respectively. It should be noted that the printed circuit board 12 has a thickness substantially identical to the height of the projection 11a projecting forward from the front surface of the metal plate 11.

[0053] The wiring portion 12a provided at the front of the printed circuit board 12 is extended to the vicinity of the insertion hole 13 and electrically connected with the LED chip 1 through a thin metal wire, e.g. a thin gold wire, as the bonding wire W. As described above, the bottom of the housing recess 1b, on which the LED chip 1 is mounted, is positioned ahead of the joining portion between the metal plate 11 and the printed circuit board 12. This allows a pad (not shown) for wiring that is provided on the LED chip 1 to be arranged substantially flush with the wiring portion 12a, thus facilitating the electrical connection between the LED chip 1 and the wiring portion 12a by use of the bonding wire W.

[0054] The LED chip 1 is a blue LED chip that has a sapphire substrate and a gallium nitride light emitting portion formed thereon.

[0055] The LED chip 1 and the bonding wire W is encapsulated in the resin seal portion 50 of transparent resin such as epoxy resin, silicone resin, or the like. The resin seal portion 50 is formed, for example, by dropping epoxy resin for molding. Alternatively, the resin seal portion 50 may be formed from epoxy resin suitable for transfer molding by using a metal mold. This can make it easy to shape the resin seal portion 50 in a desired way. For example, the resin seal portion 50 can be shaped like a hemisphere, that is, being convex at the front, in order to function as a lens.

[0056] In this embodiment, the metal plate 11 is 0.6 mm thick. The diameter of the projection 11a of the metal plate is 1 mm and its height is 0.3 mm. The depth of the housing recess 11b is 0.3 mm and the diameter of its bottom is 0.7 mm. The printed circuit board 12 has a thickness of 0.3 mm.

The LED chip **1** has a chip area of $350\ \mu\text{m}^2$ and a thickness of $80\ \mu\text{m}$ so that it can be mounted on the bottom of the housing recess **11b**.

[0057] In the light emitting device according to this embodiment, the LED chip **1** is disposed to be thermally coupled to the bottom of the housing recess **11b** at the front of the projection **11a** projecting from the metal plate **11**. This allows heat generated at the LED chip **1** to be rapidly radiated through the metal plate **11** to the outside. More particularly, the metal plate **11** can function as a radiator. Further, the LED chip **1** is arranged so that its front surface is positioned deeper than the top of the projection **11a**. This allows light emitted sideward from the LED chip **1** to be reflected on the tilted side wall of the housing recess **11b** formed in the projection **11a** so that the reflected light can be extracted from the light emitting device to the outside (forward), thus providing improved efficiency of light extraction from the LED chip **1**.

[0058] The portion that functions as a reflector is the tilted metal side wall of the housing recess **11b** formed in the metal projection **11a** formed integrally with the metal plate **11** capable of heat radiation. This reflector is free from deterioration due to oxidation when heated in the mounting process of the LED chip **1**, in contrast to the conventional reflector of white resin. Further, this reflector can be prevented from decrease in the reflecting ability due to the deterioration of resin that is caused by receiving blue light emitted from the LED chip **1**.

[0059] In this embodiment, the space between the side wall of the insertion hole **13** in the printed circuit board **12** and the periphery of the projection **11a** is a resin filled portion in which at least part of sealing resin is filled.

[0060] (Embodiment 2)

[0061] As shown in FIG. 2, a light emitting device according to this embodiment includes a frame member **30** in addition to the components included in the light emitting device according to Embodiment 1. By adding this member, the configuration of a resin seal portion **50** is modified. Since the light emitting device according to this embodiment is substantially identical in basic structure to the device according to Embodiment 1, like components are denoted by like numerals and will be explained in no more detail.

[0062] The frame member **30** is made of a white plastic resin and configured like a frame (circular). The frame member is joined to the front surface of the printed circuit board **12** so as to surround the insertion hole **13**. Sealing resin, which forms the resin seal portion **50**, is poured into the frame member **30** for encapsulation of an LED chip **1** and a bonding wire **W**. The front surface of the resin seal portion **50** and the front surface of the frame member **30** are arranged to be substantially flush in the vertical direction. The inside diameter of the frame member **30** gradually becomes greater toward its front surface. The resin seal portion **50** is formed by dropping transparent epoxy resin.

[0063] Thus, in this embodiment, the frame member **30** allows the resin seal portion **50** to be formed into a desired shape even if a sealing resin for molding is used as the material of the resin seal portion **50**.

[0064] The wiring portion **12a** provided at the front of the printed circuit board **12** is extended to the vicinity of the

insertion hole **13** through under the frame member **30**. Therefore, even with the frame member **30**, the electrical connection between the LED chip **1** and the wiring portion **12a** can be easily carried out with the bonding wire **W**. The LED chip **1** is a blue LED chip that has a sapphire substrate and a gallium nitride light emitting portion formed on the substrate, in the same manner as Embodiment 1.

[0065] In this embodiment, in the same manner as Embodiment 1, a metal plate **11** is 0.6 mm thick. The diameter of a projection **11a** of the metal plate is 1 mm and its height is 0.3 mm. The depth of a housing recess **11b** is 0.3 mm and the diameter of its bottom is 0.7 mm. The printed circuit board **12** has a thickness of 0.3 mm. The LED chip has a chip area of $350\ \mu\text{m}^2$ and a thickness of $80\ \mu\text{m}$. The frame member **30** is 3 mm in inside diameter and 1 mm in thickness.

[0066] In another example of the light emitting device according to this embodiment, as shown in FIG. 3, the top of the projection **11a** is configured to be substantially flush with or ahead of the front surface of the printed circuit board **12**. An LED chip **1** is mounted on the top of the projection **11a**. In this case, light emanated sideward from the LED chip **1** can be reflected on the lower end of the frame member **30** or transmitted for extraction out of the light emitting device.

[0067] (Embodiment 3)

[0068] As shown in FIG. 4, a light emitting device according to this embodiment includes a MID (Molded Interconnected Device) substrate **60** (three-dimensional molded circuit board) that has a resin insulating substrate molded to be non-planar and a wiring portion **61** provided in three dimensions on the surfaces of the insulating substrate, in place of the printed circuit board **12** described in Embodiment 1. Like components as those of Embodiment 1 are denoted by like numerals and will be explained in no more detail.

[0069] The MID substrate **60** is joined to the front surface of a metal plate **11**. The MID substrate **60** has an insertion hole **62a** into which a projection **11a** projecting forward from the front surface of the metal plate **11** is inserted and a hole as a resin filled portion **62b** that is communicated with the insertion hole **62a** and is larger in inside diameter than the insertion hole **62a**. The inside diameter of the resin filled portion increases toward the opening. The insertion hole and the resin filled portion are formed during molding of the MID substrate **60**. The resin filled portion **62a** and the space between the side wall of the insertion hole **62a** and the periphery of the projection **11a** are filled with sealing resin, for forming a resin seal portion **50**. The thickness of the MID substrate **60** around the insertion hole **62a** is substantially the same as the height of the projection **11a**.

[0070] The wiring portion **61** provided at the front of the MID substrate **60** is extended toward the insertion hole **62b** along the side wall of the resin filled portion **62b** so that the wiring portion **61** is electrically connected with an LED chip **1** through a bonding wire **W**. The LED chip **1** is a blue LED chip that has a sapphire substrate and a gallium nitride light emitting portion formed thereon, in the same manner as Embodiment 1.

[0071] In this embodiment, in the same manner as Embodiment 1, the metal plate **11** is 0.6 mm thick. The

diameter of the projection **11a** is 1 mm and its height is 0.3 mm. The depth of a housing recess **11b** is 0.3 mm and the diameter of its bottom is 0.7 mm.

[0072] The insulating substrate of the MID substrate **60** is 0.3 mm thick at the part around the insertion hole **62a** while it is 1.3 mm thick at the part around the resin filled portion **62b**.

[0073] The insulating substrate of the MID substrate **60** is made of Amodel (a trademark of BP Amoco Polymers, Inc.). Alternatively, the insulating substrate of the MID substrate **60** may be made of polyphthalamide resin.

[0074] The front surface of the resin seal portion **50** and the front surface of the MID substrate **60** are arranged to be substantially flush in the vertical direction. In this embodiment, the resin filled portion **62b** is provided in the MID substrate **60**. This can eliminate the steps of forming an additional frame member **30** (refer to FIG. 2) in which sealing resin is filled and adhering it as required in Embodiment 2, thus facilitating the assembling as compared to Embodiment 2.

[0075] FIG. 5 shows another example of the light emitting device according to this embodiment. In this example, a printed circuit board **12** having a glass epoxy substrate as insulating substrate is joined to the front surface of a metal plate **11** having a plurality of projections **11a** each projecting forward from the front surface. Provided on the front surface of the printed circuit board **12** are MID substrates **60** each for a single LED chip **1**. In contrast to the above described device according to this embodiment that uses a single MID substrate **60** for a plurality of LED chips **1**, this example uses an MID substrate **60** provided individually for a respective LED chip.

[0076] Each of the MID substrates **60** has an insertion hole **62a** that is configured to be continuous with respect to an insertion hole **13** provided in the printed circuit board **12** and a hole as a resin filled portion **62b** that is communicated with the insertion hole **62a**.

[0077] In this example, the wiring portion **61** of the MID substrate **60** is connected with the LED chip **1** through a bonding wire **W** while being connected with a wiring portion **12a** of the printed circuit board **12**.

[0078] Generally, an MID substrate is difficult to be increased in size as well as being relatively expensive. The structure shown in FIG. 5 can minimize the amount of MID substrate to be used so as to reduce the cost while allowing the light emitting device to be increased in size.

[0079] (Embodiment 4)

[0080] As shown in FIG. 6, a light emitting device according to this embodiment has a groove **15** formed by cutting a metal plate **11** with a rotary cutter. The groove **15** allows projections **11a** to be electrically isolated from each other. Further, an MID substrate **60** in this embodiment has a wiring portion **61** that is partially extended to the back of the MID substrate **60** along the side wall of a resin filled portion **62b** and the side wall of an insertion hole **62a** so as to be electrically connected with the metal plate **11**. Since the other arrangement of this embodiment is substantially identical to that of Embodiment 3 shown in FIG. 4, like components are denoted by like numerals and will be explained in no more detail.

[0081] An LED chip **1** in this embodiment is a red LED chip that has a light emitting portion of AlInGaP and electrodes provided at both sides in the direction of the thickness of the chip. The LED chip **1** is mounted on a housing recess **11b** with the back side being adhered to the bottom of the housing recess **11b** by using an electrically conductive paste (such as a silver paste). This causes the electrode provided at the back side of the LED chip **1** to be electrically connected with the metal plate **11**. The electrode (pad) provided at the front side of the LED chip **1** is electrically connected with the wiring portion **61** of the MID substrate **60** through a bonding wire **W**.

[0082] In this embodiment, in the same manner as Embodiment 3, the metal plate **11** is 0.6 mm thick. The diameter of the projection **11a** is 1 mm and its height is 0.3 mm. The depth of the housing recess **11b** is 0.3 mm and the diameter of its bottom is 0.7 mm.

[0083] In this embodiment, an LED chip having electrodes at both sides in the direction of the thickness can be used as the LED chip **1**. Further, if a plurality of LED chips are connected in parallel, currents flowing through the respective LED chips are varied depending on their voltage characteristics. In this embodiment, the LED chips **1** are connected in series. This can prevent the variations of currents flowing through the respective LED chips. In addition, this embodiment allows regulation resistors to be connected in parallel so as to regulate the currents individually.

[0084] (Embodiment 5)

[0085] As shown in FIG. 7, a light emitting device according to this embodiment includes a single MID substrate **60** and a plurality of metal plates **11** each having a projection **11a**. Each of the metal plates **11** is adhered to the back side (the lower side in FIG. 7) of the MID substrate **60**. The MID substrate **60** has a surface (front surface) provided with a wiring portion **61**, which is partially extended via a through hole **63** to the back side of the MID substrate so as to be electrically connected with the metal plate **11**. Since the other arrangement of this embodiment is substantially identical to that of Embodiment 4, like components are denoted by like numerals and will be explained in no more detail.

[0086] In this embodiment, in the same manner as Embodiment 4, the metal plate **11** is 0.6 mm thick. The diameter of the projection **11a** is 1 mm and its height is 0.3 mm. The depth of a housing recess **11b** is 0.3 mm and the diameter of its bottom is 0.7 mm.

[0087] In this embodiment, in the same manner as Embodiment 4, an LED chip having electrodes at both sides in the direction of the thickness can be used as the LED chip **1**. Further, in the same manner as Embodiment 4, this embodiment can prevent the variations of currents flowing through the respective LED chips as well as allowing the currents to be regulated individually.

[0088] (Embodiment 6)

[0089] As shown in FIG. 8, a light emitting device according to this embodiment is substantially identical in basic structure to the device according to Embodiment 3 that is shown in FIG. 4. Like components are denoted by like numerals as those of Embodiment 3 and will be explained in no more detail.

[0090] This embodiment employs as a metal plate **11a** copper plate in place of the aluminum plate, because copper plates are superior, in both adhesive property with respect to an MID substrate **60** and thermal conductivity, to aluminum plates. The thermal conductivity of copper is 403W/(m·K) while the thermal conductivity of aluminum is 236W/(m·K).

[0091] The light emitting device has a reflecting film **17** made of aluminum, which is provided on the bottom and side wall of a housing recess **11b** formed at the front of a projection **11a** projecting forward from the front surface of the metal plate **11**. The reason is that aluminum is higher in light reflectance than copper. The reflecting film **17** is provided by masking the metal plate **11** with the exception of the housing recess **11b** followed by depositing an aluminum film onto the bottom and side wall of the housing recess **11b**.

[0092] In this embodiment, in the same manner as Embodiment 3, the metal plate **11** is 0.6 mm thick. The diameter of the projection **11a** is 1 mm and its height is 0.3 mm. The depth of the housing recess **11b** is 0.3 mm and the diameter of its bottom is 0.7 mm.

[0093] The MID substrate **60** has an insulating substrate that is 0.3 mm thick at the part around an insertion hole **62a** and 1.3 mm thick at the part around a resin filled portion **62b**. The resin filled portion **62b** is a circular hole, of which the inside diameter increases toward the opening.

[0094] The insulating substrate of the MID substrate **60** is made of Amodel (a trademark of BP Amoco Polymers, Inc.). Alternatively, the insulating substrate of the MID substrate **60** may be made of polyphthalamide resin.

[0095] Since the metal plate **11** is a copper plate in this embodiment, the metal plate **11** can be favorably adhered to the insulating substrate of the MID substrate **60** as well as allowing heat generated at the LED chip **1** to be efficiently radiated to the outside, as compared with a metal plate made of aluminum.

[0096] In this embodiment, the LED chip **1** is a blue LED chip in the same manner as Embodiment 3. Since copper has a low reflectance at blue wavelength region, it may lower the efficiency of light extraction from the LED chip **1** to the outside. In order to prevent the lowering, the reflecting film **17** of aluminum higher in reflectance than copper is provided on the bottom and side wall of the housing recess **11b**. Thus, the light emitting device can be provided that has increased light extraction efficiency as well as radiating heat efficiently. The material for the reflecting film **17**, which is provided on the bottom and side wall of the housing recess **11b**, is not limited to aluminum used in this embodiment but may be another material, e.g. silver. The reflecting film **17** of silver can be implemented by silver plating, for example.

[0097] The reflecting film **17** in this embodiment, which is made of a metal having a reflectance higher than that of the metal plate **11** and is disposed on the inner surfaces of the housing recess **11b**, allows the metal plate **11** to be made of a desired material regardless of the reflectance, hence extending the range of choices for the material. For example, the metal plate **11** can be made of a material selected in view of the adhesive property with respect to the insulating substrate of the MID substrate **60** or the capacity of heat radiation.

[0098] (Embodiment 7)

[0099] As shown in FIG. 9, a light emitting device according to this embodiment is similar to the light emitting device according to Embodiment 2. Therefore, like components are denoted by like numerals as those of Embodiment 2 and will be explained in no more detail.

[0100] The light emitting device according to this embodiment is different from Embodiment 2 in that it has a reflecting film **33** of aluminum formed on an inside wall **31** of a frame member **30** and a dispersing agent scattered within the sealing resin in a resin seal portion **50**. The reflecting film **33** may be made of silver, for example, in place of aluminum used in this embodiment. The reflecting film **17** of silver can be implemented by silver plating, for example.

[0101] In this embodiment, in the same manner as Embodiment 2, a metal plate **11** is 0.6 mm thick. The diameter of a projection **11a** is 1 mm and its height is 0.3 mm. The depth of a housing recess **1b** is 0.3 mm and the diameter of its bottom is 0.7 mm. A printed circuit board **12** is 0.3 mm thick. An LED chip has a chip area of 350 mm² and a thickness of 80 μm. The frame member **30** is 3 mm in inside diameter and 1 mm in thickness.

[0102] If the dispersing agent or fluorescent particles are scattered in the sealing resin, light emanated from the LED chip **1** in the forward direction passes through the sealing resin without diffusion. As a result, the light is mostly extracted out of the device without shining on the inside wall **31** of the frame member **30**.

[0103] On the other hand, the light emitting device according to this embodiment has the dispersing agent, which serves to uniformize the intensity distribution of luminous radiation, scattered within the sealing resin in the resin seal portion **50**. Therefore, light emanated from the LED chip **1** can pass through the resin seal portion **50** while being diffused by the dispersing agent. Since the reflecting film **33** is formed on the inside wall **31** of the frame member **30**, the light diffused by the dispersing agent toward the inside wall of the frame member **30** is reflected on the reflecting film **33** for extraction to the outside. This can provide increased light extraction efficiency, as compared to a case using no reflecting film **33**, in which light is reflected on the surface of the frame member **30** itself.

[0104] (Embodiment 8)

[0105] As shown in FIG. 10, a light emitting device according to this embodiment includes a printed circuit board **70** having a glass epoxy substrate as the insulating substrate. The printed circuit board **70** is joined to the front surface of the insulating substrate of a printed circuit board **12**, alongside of a frame member **30**. The printed circuit board **70** is a substrate on which a circuit component is mounted. As the other arrangement of the light emitting device according to this embodiment is substantially identical to that of Embodiment 2, like components are denoted by like numerals and will be explained in no more detail.

[0106] The printed circuit board **70** has a copper foil as a wiring portion (wiring pattern) **71** at the front side while being joined to the front surface of the printed circuit board **12** at the rear (back) side. The printed circuit board **70** has a hole **70a** formed at a location corresponding to the frame

member **30**. The wiring portion **71** provided at the front of the printed circuit board **70** is extended along the side wall of the hole **70a** for electrical connection with a wiring portion **12a** of the printed circuit board **12**.

[0107] The printed circuit board **70** is substantially as thick as or thicker than the frame member **30** so as to prevent the frame member **30** from protruding forward beyond the printed circuit board **70**. The printed circuit board **70** is a circuit component mounting substrate.

[0108] When mounting on a circuit board circuit components such as a resistor, a transistor, and the like by a reflow process, it is necessary to mask the circuit board for applying solder paste only to the region where the circuit components are placed. In the above described light emitting device according to Embodiment 2, as shown in **FIG. 2**, the front side of the printed circuit board **12** is not flat with the frame member **30** protruded. This makes the masking troublesome.

[0109] On the other hand, the light emitting device according to this embodiment includes the printed circuit board **70** substantially identical in thickness to the frame member **30** as described above. More particularly, the front surface of the printed circuit board **70** is substantially flush with the front surface of the frame member **30**, hence making it easy to mount surface-mount circuit components **5** on the front of the printed circuit board **70** by a reflow process.

[0110] The insulating substrate of the printed circuit board **70** as the circuit component mounting substrate is not limited to the glass epoxy substrate used in this embodiment. Further, the printed circuit board **70** on which the circuit components are mounted may be thicker than the frame member **30** rather than being substantially as thick as the frame member **30**. In such a case, the printed circuit board **70** can be also masked so that the circuit components **5** can be efficiently mounted by the reflow process.

[0111] **FIG. 11** shows another example of the light emitting device according to this embodiment. In this example, a printed circuit board **70** has a resin filled portion **72** communicating with an insertion hole **13** formed in a printed circuit board **12** so that the printed circuit board **70** can serve as a frame member. Provided at the front of the printed circuit board **70** is a wiring portion **71**, which is partially extended to the back of the printed circuit board **70** via a through hole **73** to be electrically connected with the wiring portion **12a** of the printed circuit board **12**.

[0112] Such a structure can facilitate the mounting of surface-mount circuit components **5**, e.g. a resistor and a transistor, by the reflow process as well as the structure according to this embodiment shown in the preceding figure. Since a separate frame member **30** (as shown in **FIG. 10**) is not required, the assembling can be simplified. In addition, the positioning between the resin filled portion **72** and the insertion hole **13** can be made easy because this structure permits them to be positioned together.

[0113] In this structure, the printed circuit board **70** as a circuit component mounting substrate may have a reflecting film **74** provided on the side wall of the resin filled portion **72**, as shown in **FIG. 12**. The reflecting film **74** is formed from a material having a reflectance higher than that of the printed circuit board **70**. This allows the frame member, for defining a portion to be filled with sealing resin, to serve as a reflecting wall. The reflecting film **74** provides increased

efficiency of light extraction from an LED chip **1** to the outside. The reflecting film **74** is provided by through-hole plating. In this case, the reflecting film **74** and the wiring portion **12a** are electrically isolated from each other through an insulating film **80**. Instead of through-hole plating, the reflecting film **74** may be formed by, for example, applying a coat of white paint, which is higher in reflectance than the printed circuit board **70**, to the side wall of the resin filled portion **72**. In such a case, the insulating film **80** is not required.

[0114] (Embodiment 9)

[0115] As shown in **FIGS. 13A and 13B**, a light emitting device according to this embodiment includes a substantially circular reflector **18** disposed on the front surface of a portion of the insulating substrate of a printed circuit board **12** that is exposed inside a frame member **30**. As the other arrangement of the light emitting device according to this embodiment is substantially identical to that of Embodiment 2, like components are denoted by like numerals and will be explained in no more detail.

[0116] The reflector **18** is configured so as not to cover a wiring portion **12a** (part) provided at the front of the printed circuit board **12** for connection with an LED chip **1**. The reflector **18** can be formed from any material having a reflectance higher than that of the insulating substrate of the printed circuit board **12**. In this embodiment, the reflecting member **18** is formed from white silk for use in silk-screen printing. In place of white silk, a metal film, for example, having a reflectance higher than that of the insulating substrate may be used as the reflecting member **18**.

[0117] The light emitting device according to this embodiment allows light emitted from an LED chip **1** to be further efficiently extracted out of the device because the reflector **18** higher in reflectance than the insulating substrate is provided, inside the frame member **30**, on the front surface of the insulating substrate of the printed circuit board **12**.

[0118] (Embodiment 10)

[0119] As shown in **FIG. 14**, a light emitting device according to this embodiment includes a metal plate **11** provided with a projection **11a** having a housing recess **11b** of which the periphery is in the configuration of a segment of a paraboloid of revolution. Further, the metal plate **11** has an integrally formed mounting portion **11c** on which an LED chip **1** is placed. The mounting portion is projected forward from the bottom of the housing recess **11b**. As the other arrangement of the light emitting device according to this embodiment is substantially identical to that of Embodiment 2, like components are denoted by like numerals and will be explained in no more detail.

[0120] The housing recess **11b** is axisymmetric and open forward of the metal plate **11**. The axis of symmetry is coincident with the central axis of the paraboloid of revolution. The mounting portion **11c** has such a height that, when the LED chip **1** is placed on the mounting portion **11c**, the paraboloid of revolution has focal point in the center of the light emitting layer of the LED chip **1**.

[0121] The light emitting device according to this embodiment allows light emitted from the side surface of the LED chip **1**, in particular, to be efficiently reflected on the periphery of the housing recess **11b**, which is in the con-

figuration of a segment of a paraboloid of revolution, so as to be directed forward. This can provide increased light extraction efficiency.

[0122] FIG. 15 shows another example of the light emitting device according to this embodiment. In this example, a mounting portion 11c has a front surface that is configured smaller than the chip area of the LED chip 1. This allows part of light emitted backward from the LED chip 1 to be efficiently reflected toward the front side of the light emitting device, thus providing further increased light extraction efficiency as compared to the device shown in the preceding figure that has the mounting portion 11c of which the area of the front surface is substantially as large as or slightly larger than the chip area of the LED chip 1.

[0123] (Embodiment 11)

[0124] As shown in FIG. 16, a light emitting device according to this embodiment is substantially identical in basic structure to the light emitting device according to Embodiment 2 (see FIG. 2), but this light emitting device includes a printed circuit board 12 having a portion on which a metal plate 11 is not layered. Mounted at the back of the portion of the printed circuit board are lead-mount circuit components 5 in a cluster. FIG. 17 shows an example, for reference, of a light emitting device in which a printed circuit board 12 has a portion on which a metal plate 11 is not disposed, in the same manner as the light emitting device according to this embodiment, but lead-mount circuit components 5 are mounted in a cluster at the front side of the portion of the printed circuit board.

[0125] Either of the two light emitting devices described above is advantageous in that it allows such lead-mount circuit components 5 to be mounted on the printed circuit board 12 without the risk of a short-circuit via the metal plate 11.

[0126] In the light emitting device according to this embodiment, the printed circuit board 12 has a front surface provided with a wiring portion 12a, which is extended via a through hole 14 to the back of the portion of the printed circuit board on which the metal plate 11 is not disposed, for connection with the lead of each of the circuit components 5 arranged together at the back of the portion. This structure makes the light emitting device according to this embodiment superior to the device described above for reference. More specifically, in the light emitting device according to this embodiment, light emitted from an LED chip 1 can be radiated forward without being absorbed in or reflected on the circuit component 5, whereby the light emitting device enables the mounting of the lead-mount circuit components 5 while allowing the light from the LED chip 1 to be efficiently extracted out of the device.

INDUSTRIAL APPLICATIONS

[0127] The present invention is widely applicable to a number of primary industries employing a power of light converted from electric energy as the light source. Among the light source for emanating a large power of light while the heat radiation and the light extraction efficiency being improved are a light source for illumination, a light source for indicating the action of a switch, a light source in a traffic signal, a light source for displaying an alarm in an automobile, and a light source for advertisement.

1. A light emitting device using an LED, comprising:

a metal plate having a projection projecting forward, the projection having a front side provided with a housing recess;

a light emitting diode chip disposed on a bottom of the housing recess to be thermally coupled to the metal plate;

an insulating substrate having an insertion hole into which the projection is inserted, the insulating substrate being joined to the metal plate in layers;

a light-transmissible sealing resin in which the light emitting diode chip is encapsulated.

2. A light emitting device according to claim 1,

wherein the insulating substrate has a resin filled portion in which at least part of the sealing resin is filled.

3. A light emitting device according to claim 2, further comprising a frame member joined to a front surface of the insulating substrate so as to surround the insertion hole,

wherein the sealing resin is filled in the resin filled portion and the frame member.

4. A light emitting device according to claim 2,

wherein the insulating substrate is a three-dimensional molded circuit board having a wiring portion extended along a peripheral surface of the resin filled portion for electrical connection to the light emitting diode chip.

5. A light emitting device according to claim 1,

wherein the metal plate serves as a part of the wiring portion for electrical connection to the light emitting diode chip.

6. A light emitting device according to claim 1,

wherein the housing recess has an inner surface provided with a reflecting film of a metal with a reflectance higher than a reflectance of the metal plate.

7. A light emitting device according to claim 3,

wherein the frame member has an inside wall provided with a reflecting film of a metal with a reflectance higher than a reflectance of the frame member.

8. A light emitting device according to claim 3, further comprising a circuit component mounting substrate joined to the front surface of the insulating substrate alongside of the frame member, the circuit component mounting substrate having a front surface provided with a wiring portion,

wherein the circuit component mounting substrate has a thickness such that the frame member is prevented from protruding forward beyond the circuit component mounting substrate.

9. A light emitting device according to claim 3, wherein the insulating substrate has a reflector, of which reflectance is higher than the insulating substrate, on a front surface thereof inside the frame member.

10. A light emitting device according to claim 1,

wherein the housing recess has a periphery configured to be a segment of a paraboloid of revolution.

11. A light emitting device according to claim 1,

wherein the insulating substrate has a portion on which the metal plate is not layered, the portion of the insulating substrate having a back at which circuit components are mounted.

* * * * *