



US010703162B2

(12) **United States Patent**
Kanda et al.

(10) **Patent No.:** **US 10,703,162 B2**

(45) **Date of Patent:** **Jul. 7, 2020**

(54) **SUSPENSION CONTROL SYSTEM**

(58) **Field of Classification Search**

(71) Applicant: **HONDA MOTOR CO., LTD.**,
Minato-Ku, Tokyo (JP)

CPC B60G 2400/102; B60G 17/018; B60G
17/08; B60G 2400/204; B60G 2500/10;
(Continued)

(72) Inventors: **Ryoma Kanda**, Tochigi (JP); **Masaki
Izawa**, Tochigi (JP)

(56) **References Cited**

(73) Assignee: **Honda Motor Co., Ltd.**, Tokyo (JP)

5,444,621 A 8/1995 Matsunaga et al.
5,566,094 A 10/1996 Kojima et al.
(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 578 days.

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **14/410,808**

JP H05-229328 A 9/1993
JP H06-48139 A 2/1994
(Continued)

(22) PCT Filed: **Jun. 20, 2013**

OTHER PUBLICATIONS

(86) PCT No.: **PCT/JP2013/003859**

§ 371 (c)(1),

(2) Date: **Dec. 23, 2014**

Extended European Search Report dated Jan. 20, 2016 in the
corresponding European Patent Application No. 13809729.0.
(Continued)

(87) PCT Pub. No.: **WO2014/002444**

PCT Pub. Date: **Jan. 3, 2014**

Primary Examiner — Alexander G Kalinowski

Assistant Examiner — Sanjeev Malhotra

(65) **Prior Publication Data**

(74) *Attorney, Agent, or Firm* — Carrier Blackman &
Associates, P.C.; Joseph P. Carrier; Jeffrey T. Gedeon

US 2015/0290995 A1 Oct. 15, 2015

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

Jun. 29, 2012 (JP) 2012-147441

Jun. 29, 2012 (JP) 2012-147446

(Continued)

(51) **Int. Cl.**

B60G 17/018 (2006.01)

B60G 17/016 (2006.01)

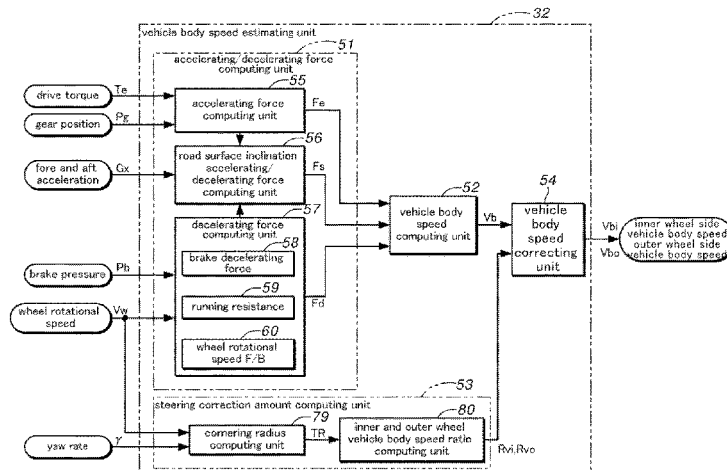
(52) **U.S. Cl.**

CPC **B60G 17/0182** (2013.01); **B60G 17/016**
(2013.01); **B60G 17/0161** (2013.01);

(Continued)

A suspension control system allows a state variable of a vehicle used for the damper damping force control to be computed at a high precision without regards to the caster angle given to the suspension geometry. A suspension control system for a vehicle provided with a variable damper that can adjust a damping force according to an input signal comprises a wheel rotational speed sensor for detecting a wheel rotational speed, a gain circuit for computing the unsprung load of each wheel according to the wheel rotational speed variation detected by the wheel speed sensor, a single wheel model computing unit for computing the sprung velocity and the stroke speed by inputting the unsprung load to a single wheel model representing the

(Continued)



behavior of the vehicle, and a damper control unit for controlling a damping force of the variable damper according to the computed sprung velocity and stroke speed.

11 Claims, 25 Drawing Sheets

(30) **Foreign Application Priority Data**

Jun. 29, 2012 (JP) 2012-147448
Jun. 29, 2012 (JP) 2012-147454

(52) **U.S. Cl.**

CPC .. *B60G 2400/202* (2013.01); *B60G 2400/206* (2013.01); *B60G 2400/208* (2013.01); *B60G 2500/106* (2013.01); *B60G 2600/82* (2013.01); *B60G 2800/162* (2013.01); *B60G 2800/70* (2013.01); *B60G 2800/916* (2013.01)

(58) **Field of Classification Search**

CPC B60G 17/016; B60G 17/0195; B60G 2400/202; B60G 2400/33; B60G 2400/41; B60G 2600/184; B60G 2800/91
USPC 701/37, 38; 280/5.5
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,208,920 B1 * 3/2001 Izawa B60G 17/016
280/5.5
7,957,881 B2 6/2011 Itoh

8,620,524 B2 12/2013 Kobayashi et al.
2002/0103587 A1 * 8/2002 Kim B60G 17/016
701/37
2002/0103588 A1 8/2002 Kim
2004/0039506 A1 * 2/2004 Kim B60G 17/0164
701/37
2004/0215380 A1 * 10/2004 Song B60G 17/08
701/37
2006/0136107 A1 * 6/2006 Kim B60G 17/018
701/38
2008/0228352 A1 * 9/2008 Brookes B60G 17/0155
701/37
2009/0024277 A1 * 1/2009 Poilbout B60G 3/04
701/38
2010/0211261 A1 * 8/2010 Sasaki B60G 17/016
701/37
2013/0166149 A1 * 6/2013 Liu B60G 17/015
701/37

FOREIGN PATENT DOCUMENTS


JP H07-117446 A 5/1995
JP H07-205788 A 8/1995
JP H11-91328 A 4/1999
JP 2000-280719 A 10/2000
JP 2007-261477 A 10/2007
JP 2008-113541 A 5/2008
JP 2011-201474 A 10/2011
JP 2012-007605 A 1/2012
WO 2011151689 A2 12/2011


OTHER PUBLICATIONS


First Office Action dated Jan. 22, 2016 in the corresponding Chinese Patent Application No. 201380034651.6.

* cited by examiner

Fig.1

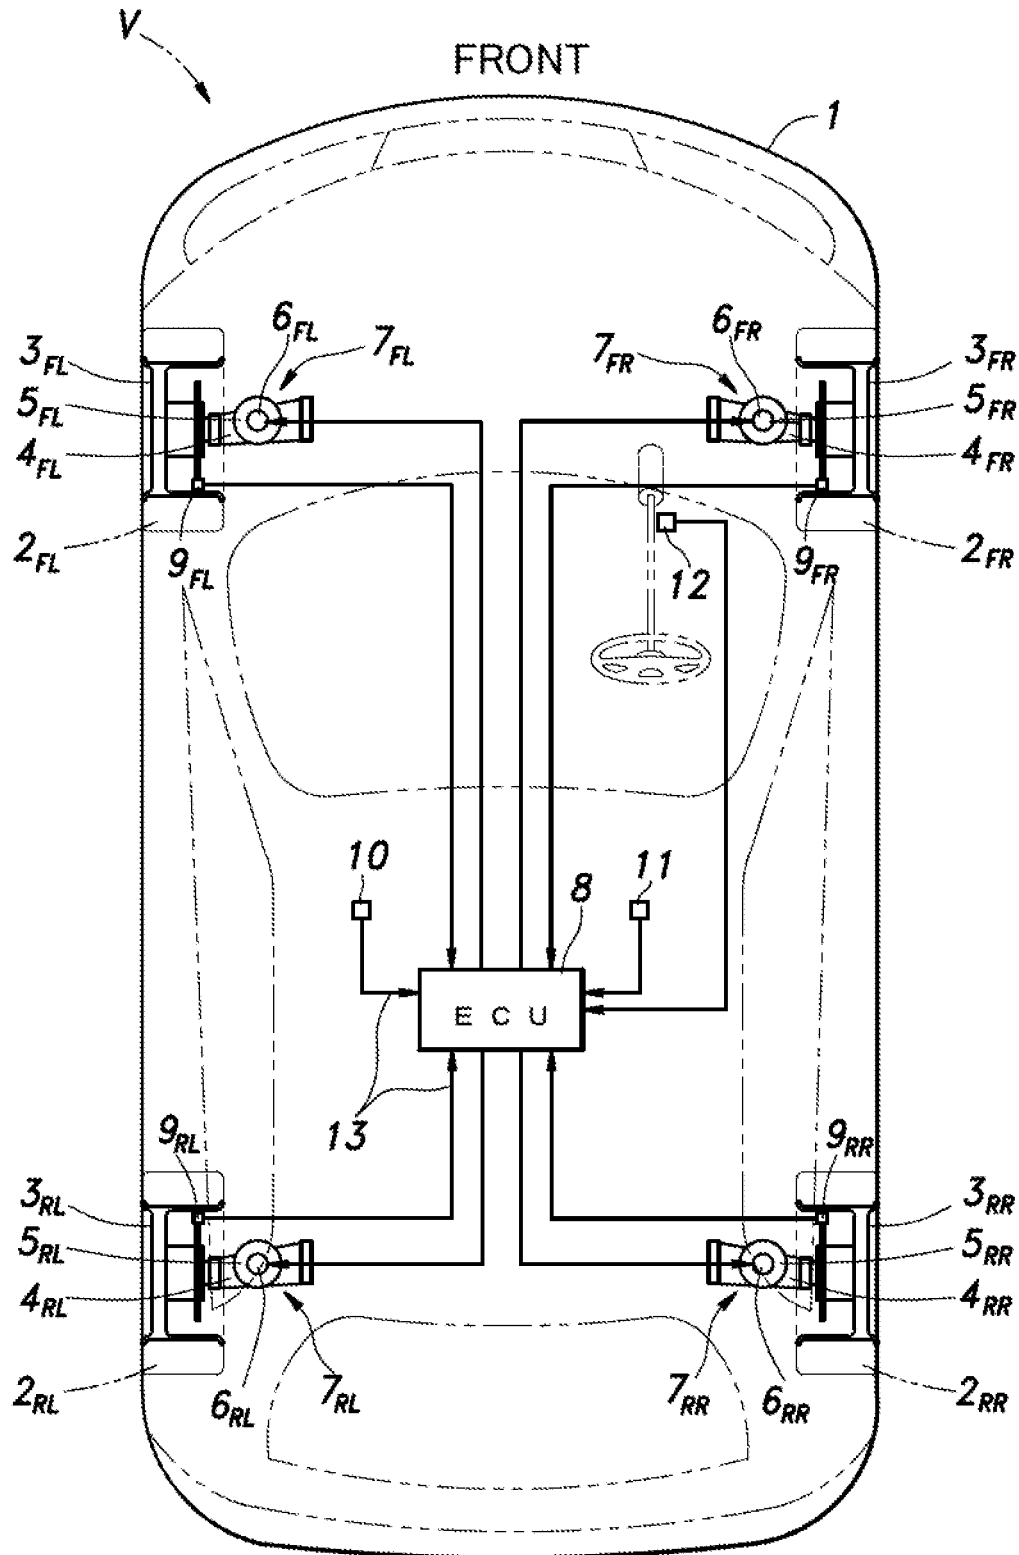

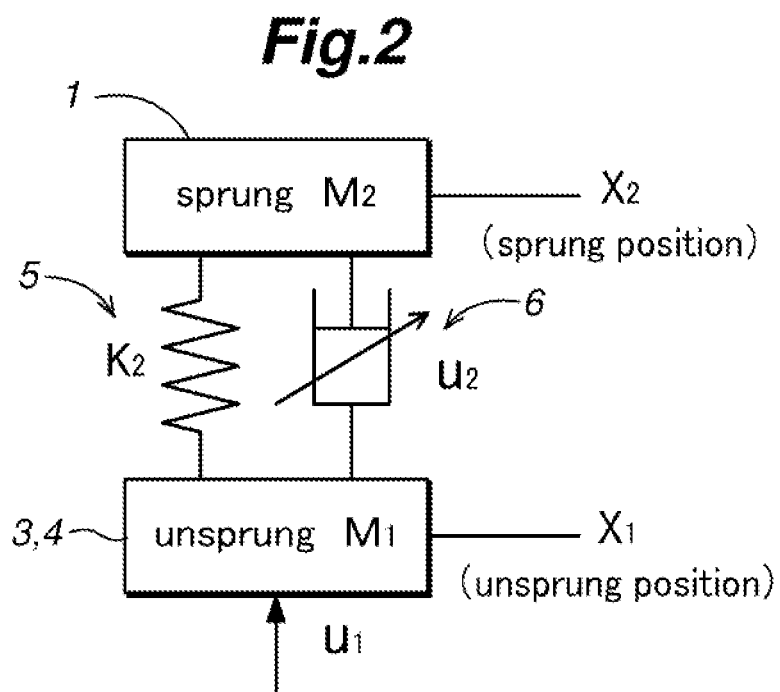

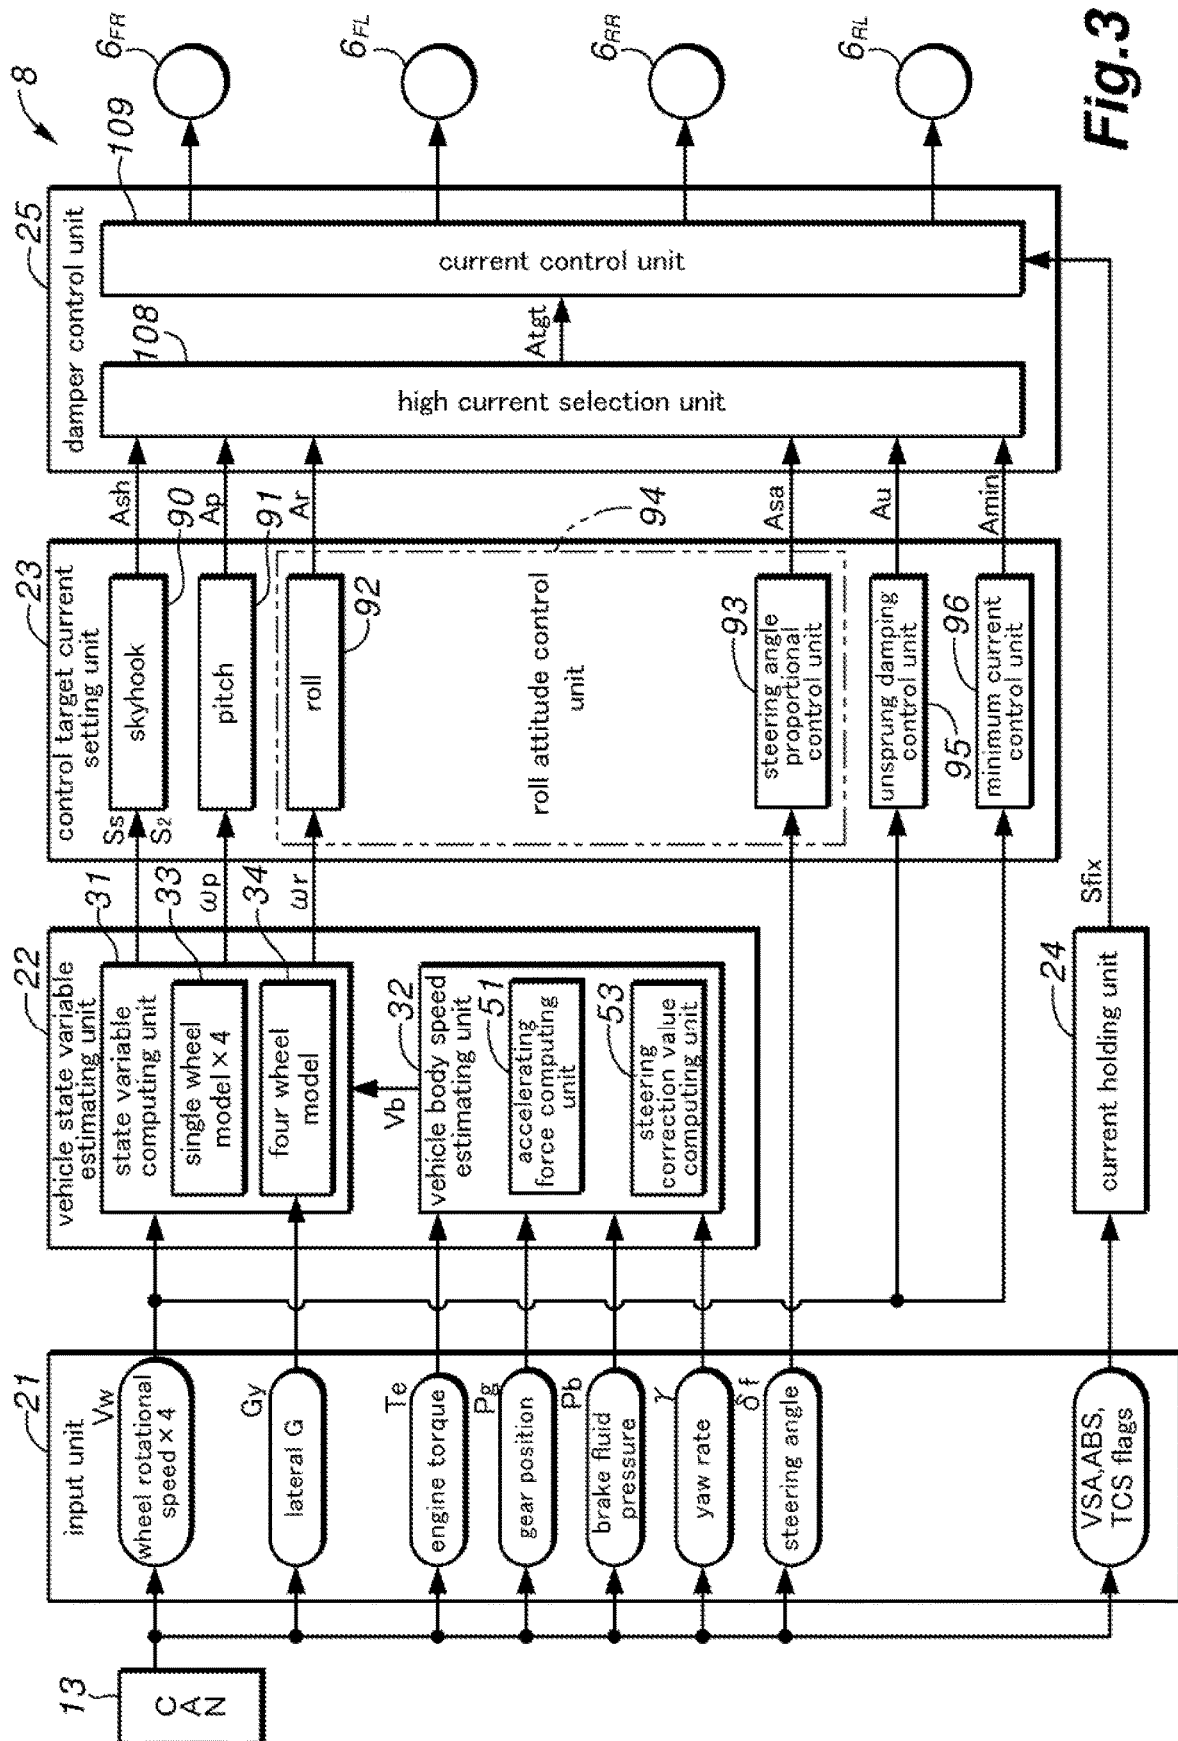

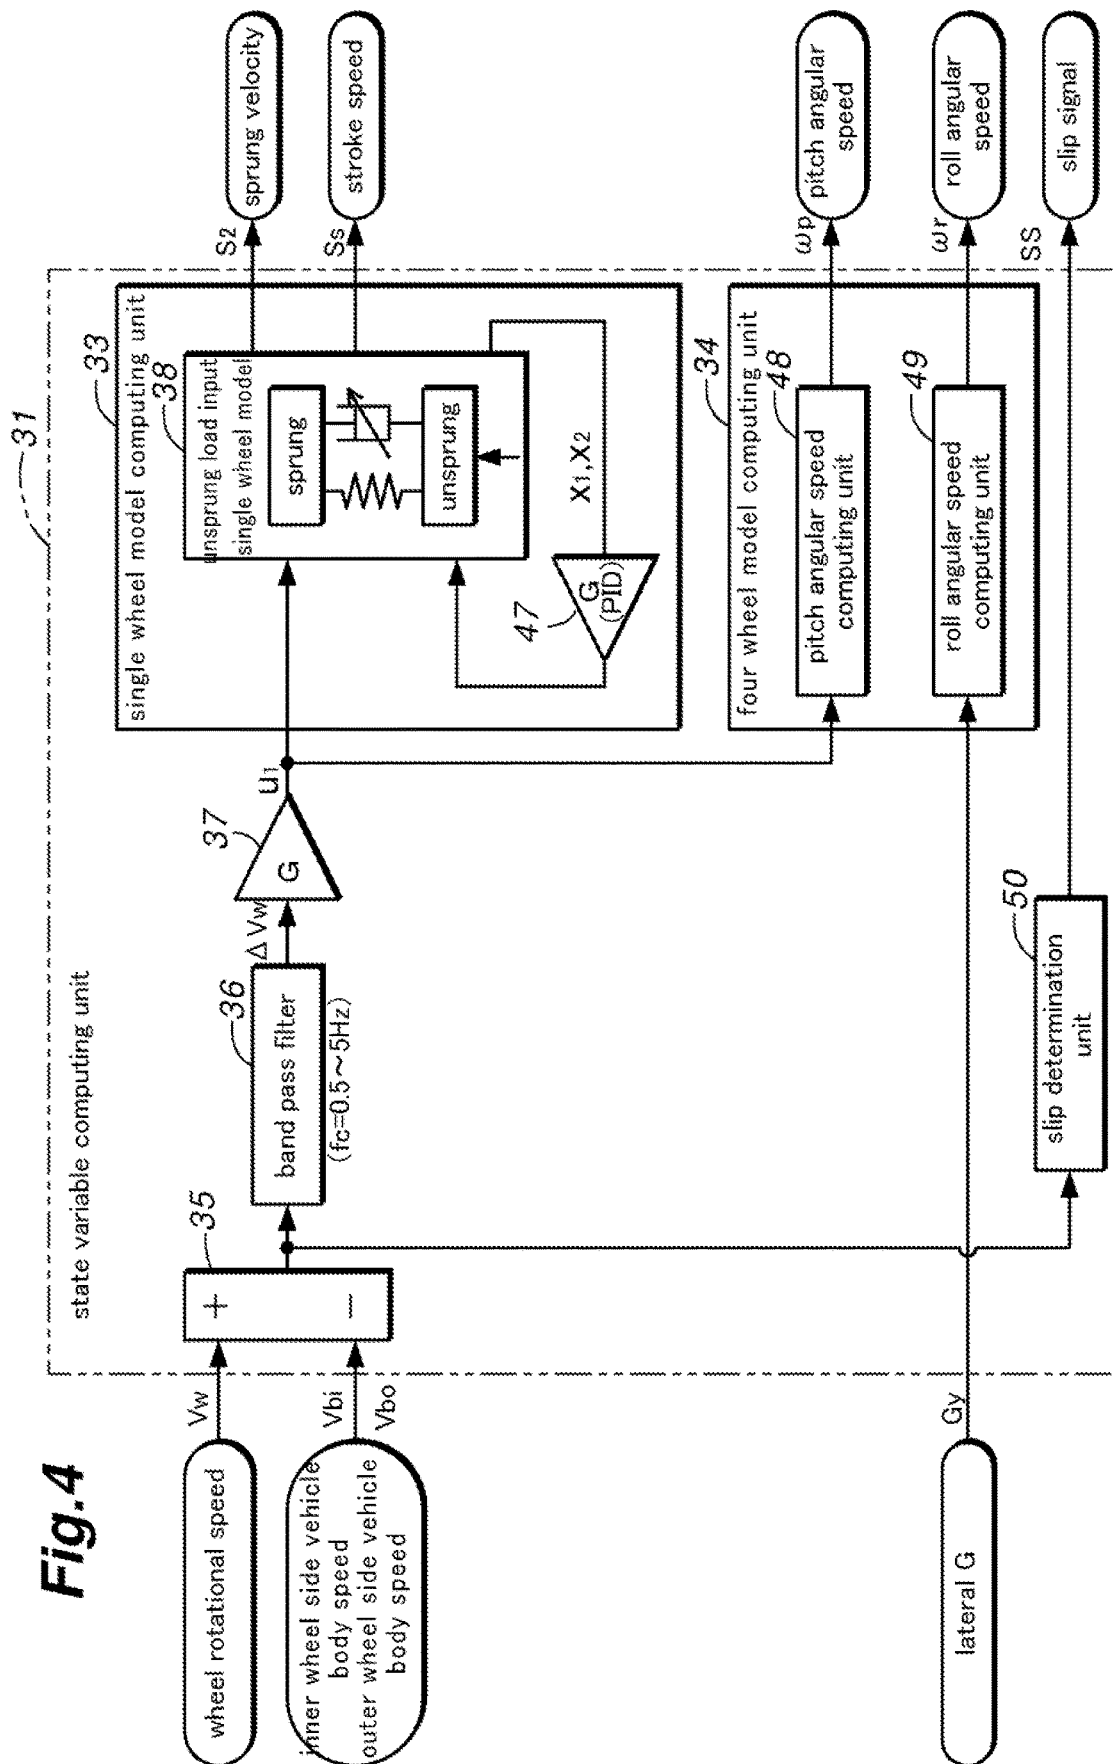


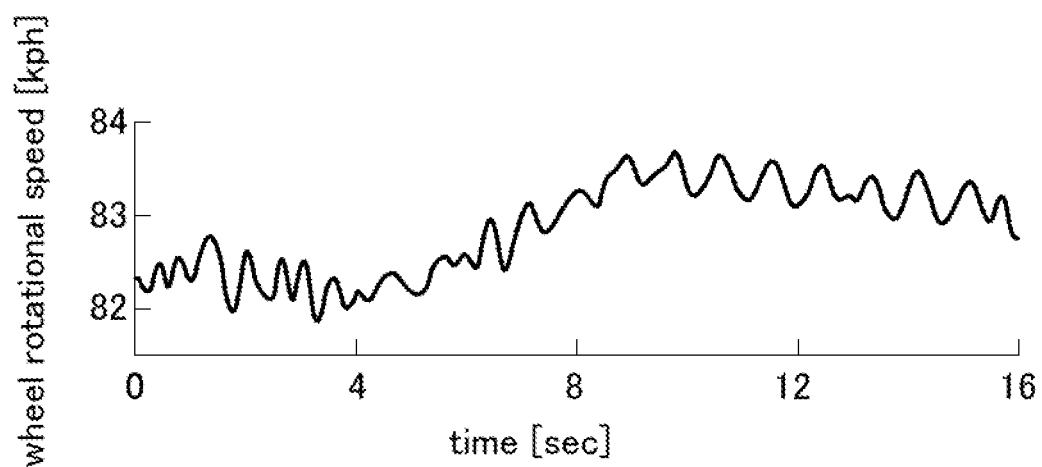
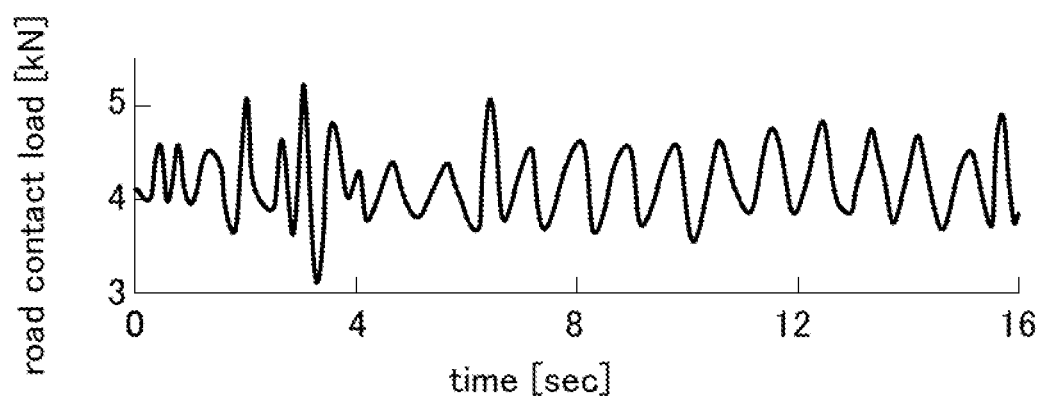
Fig.5A**Fig.5B**


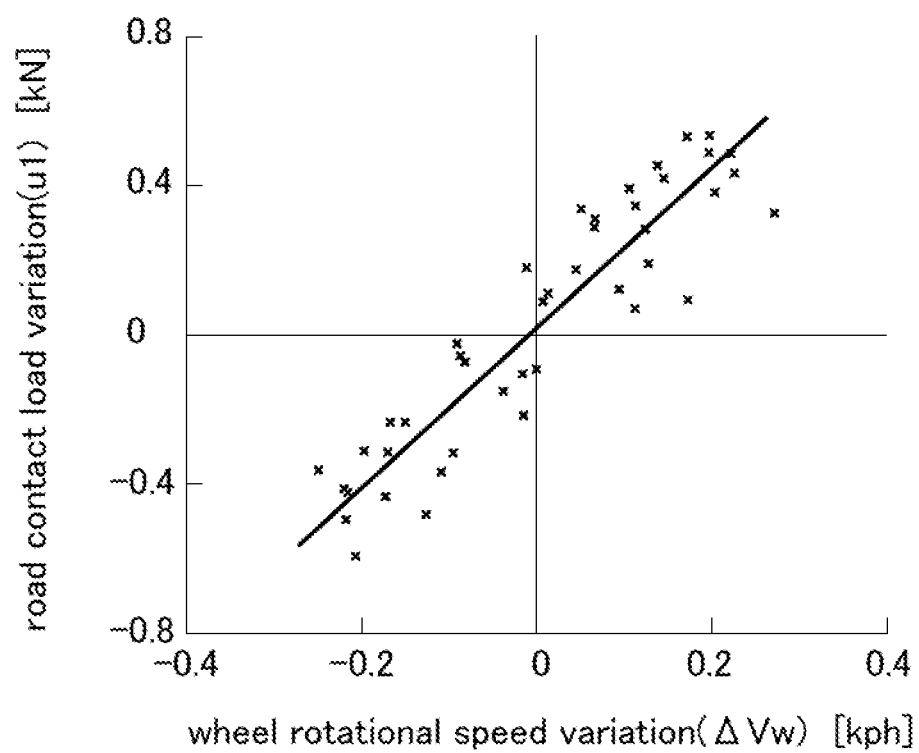
Fig.6

Fig.7

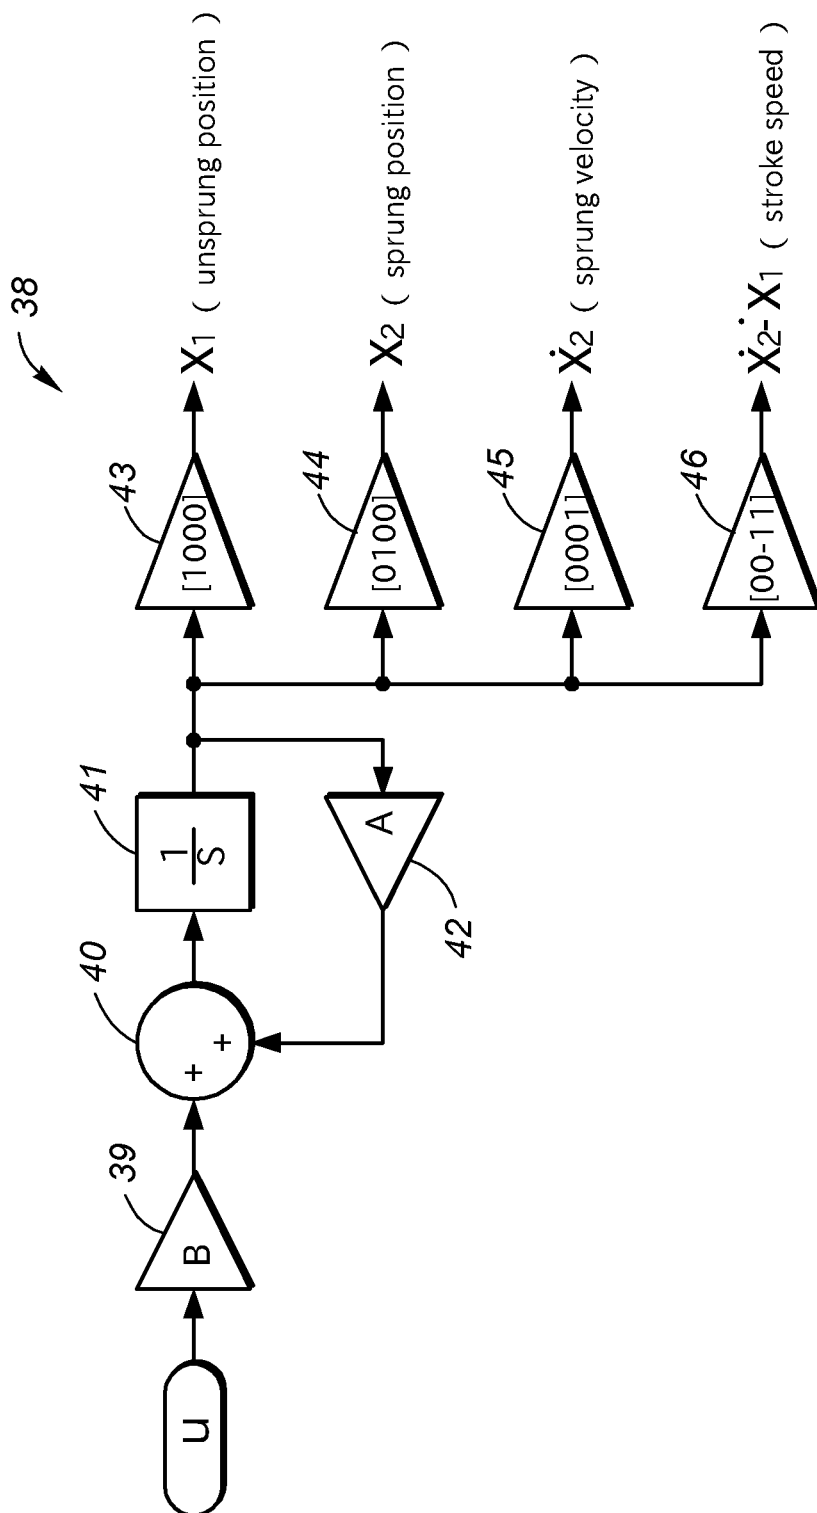

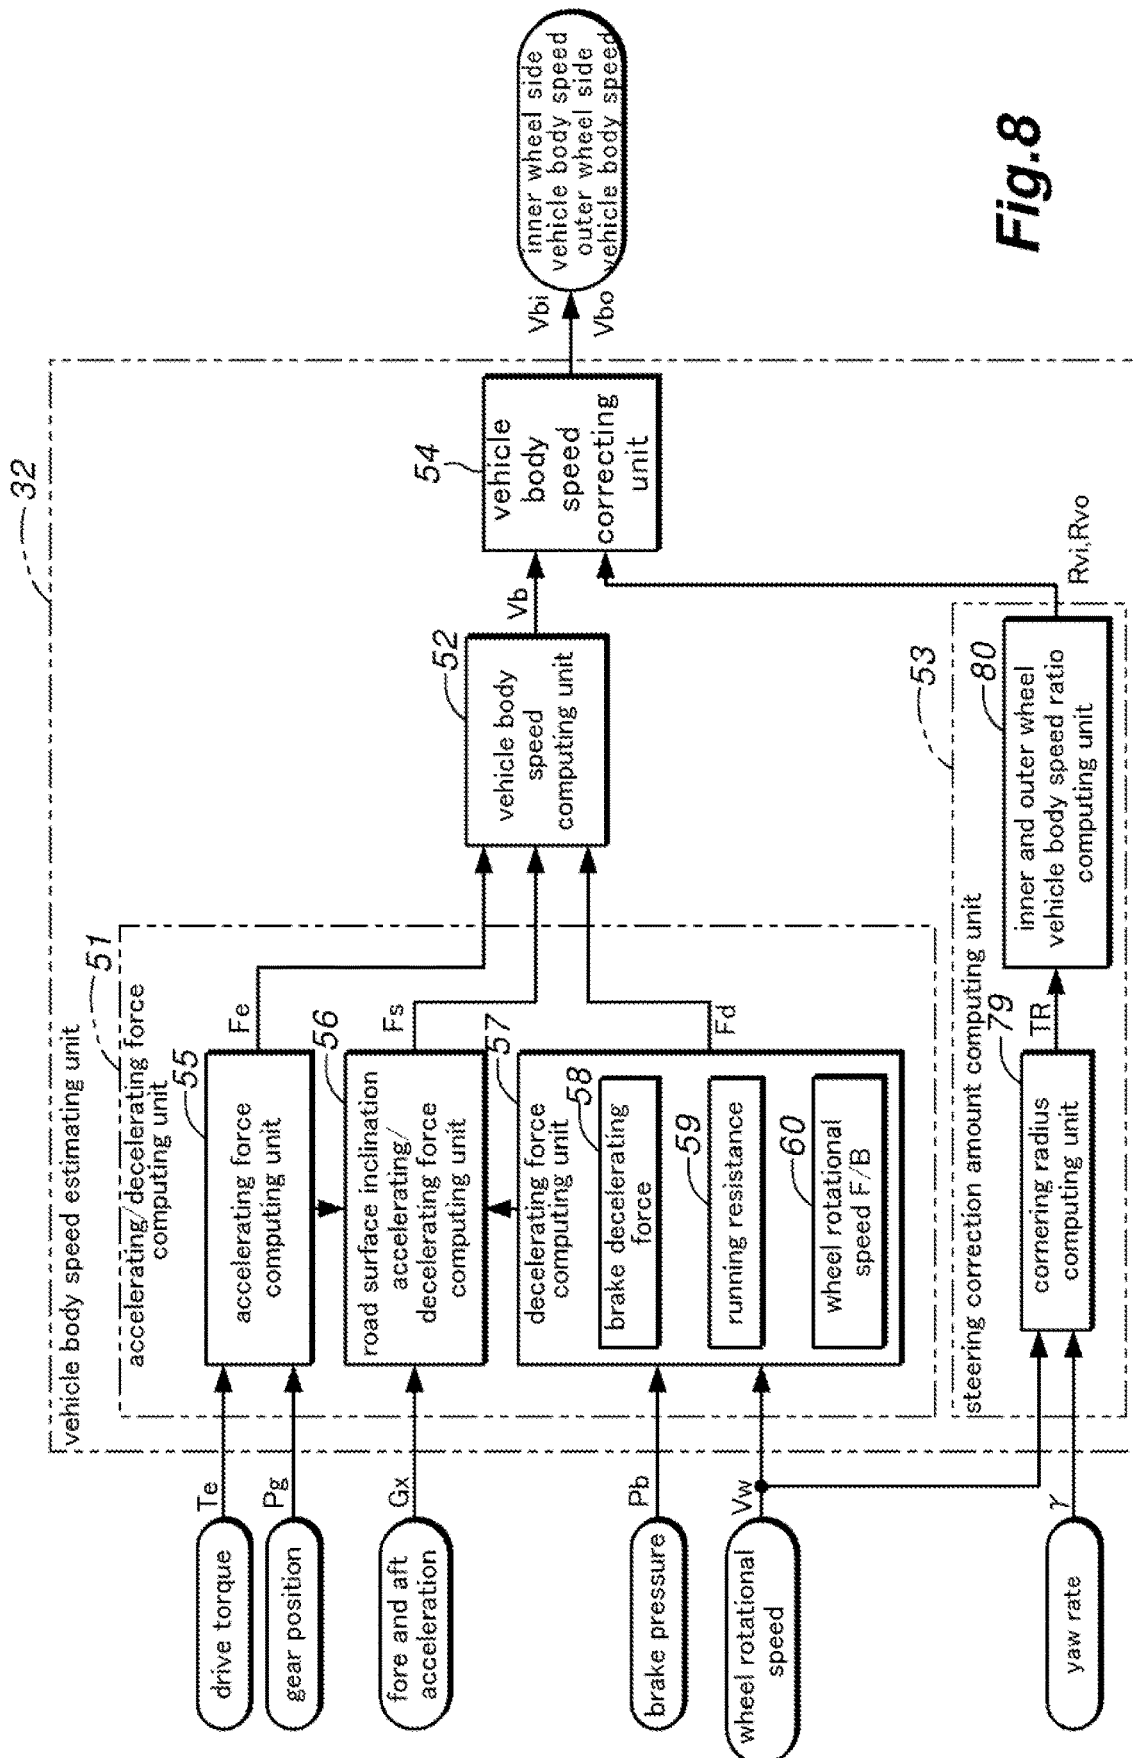


Fig.8

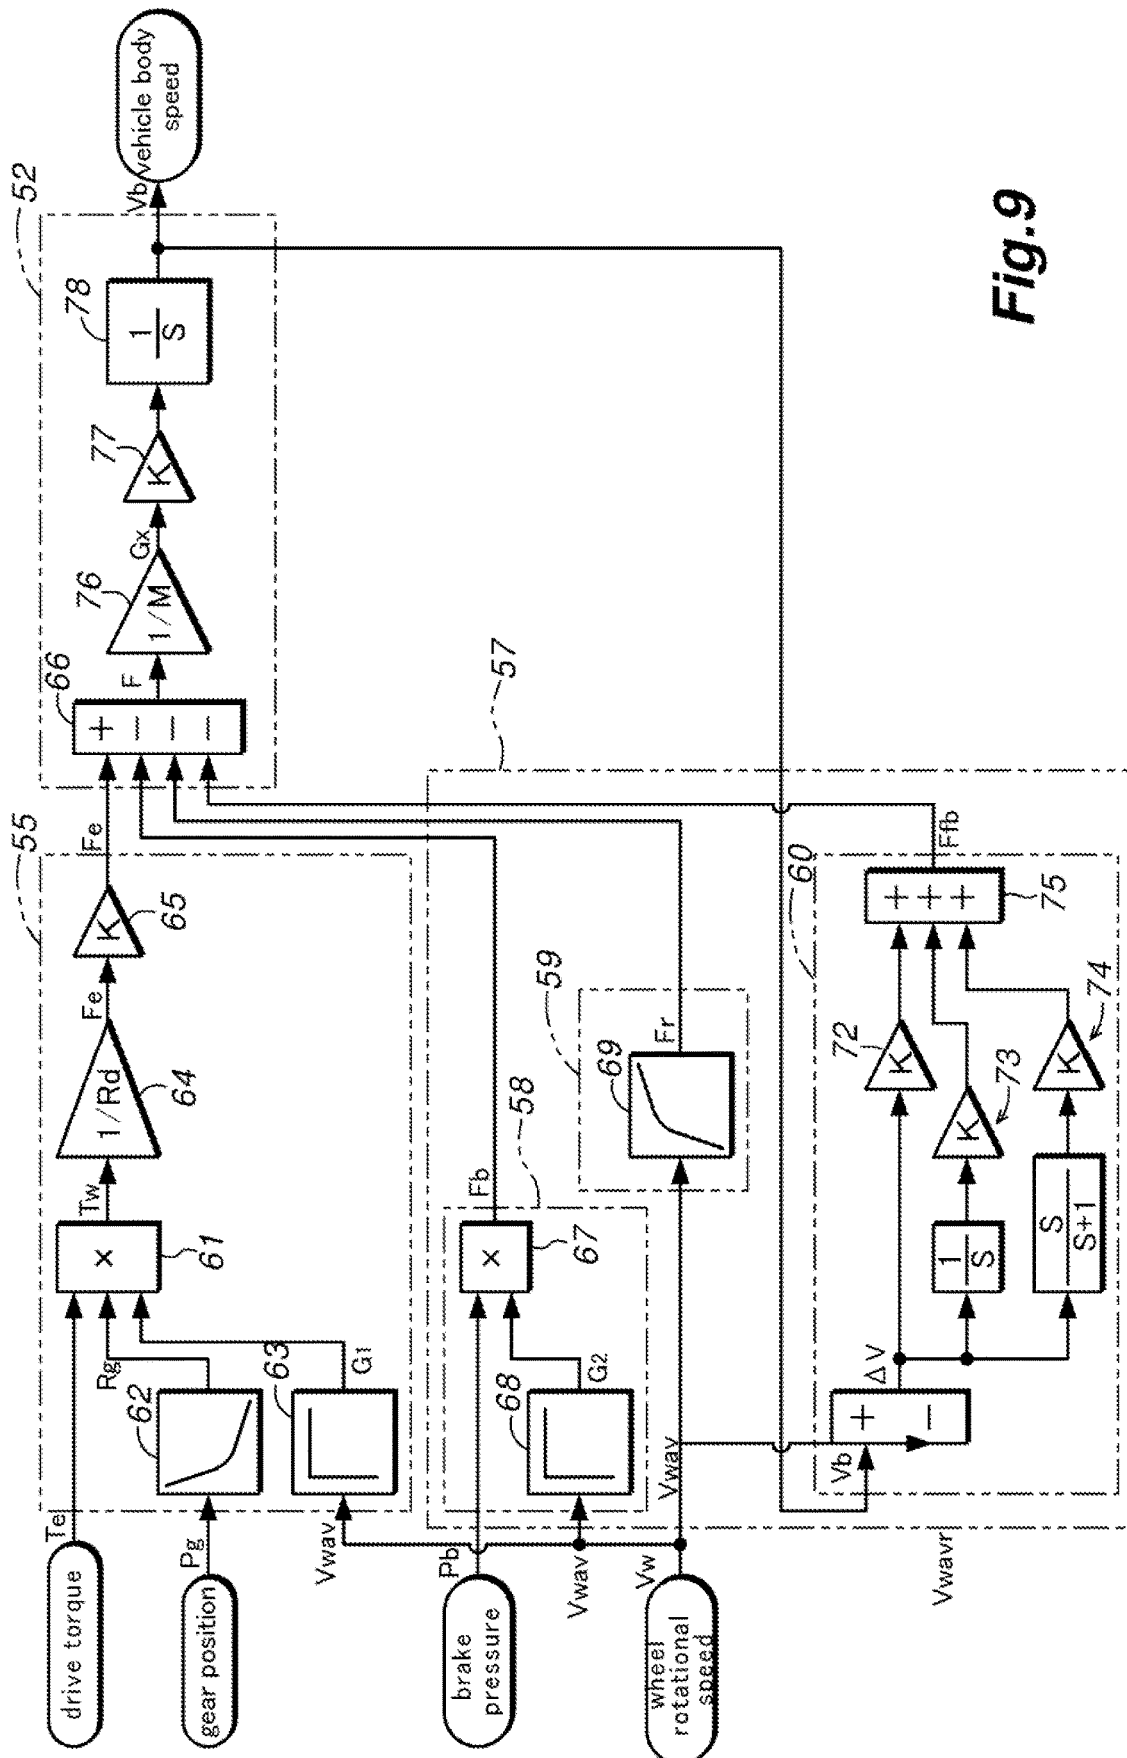


Fig.9

Fig. 10

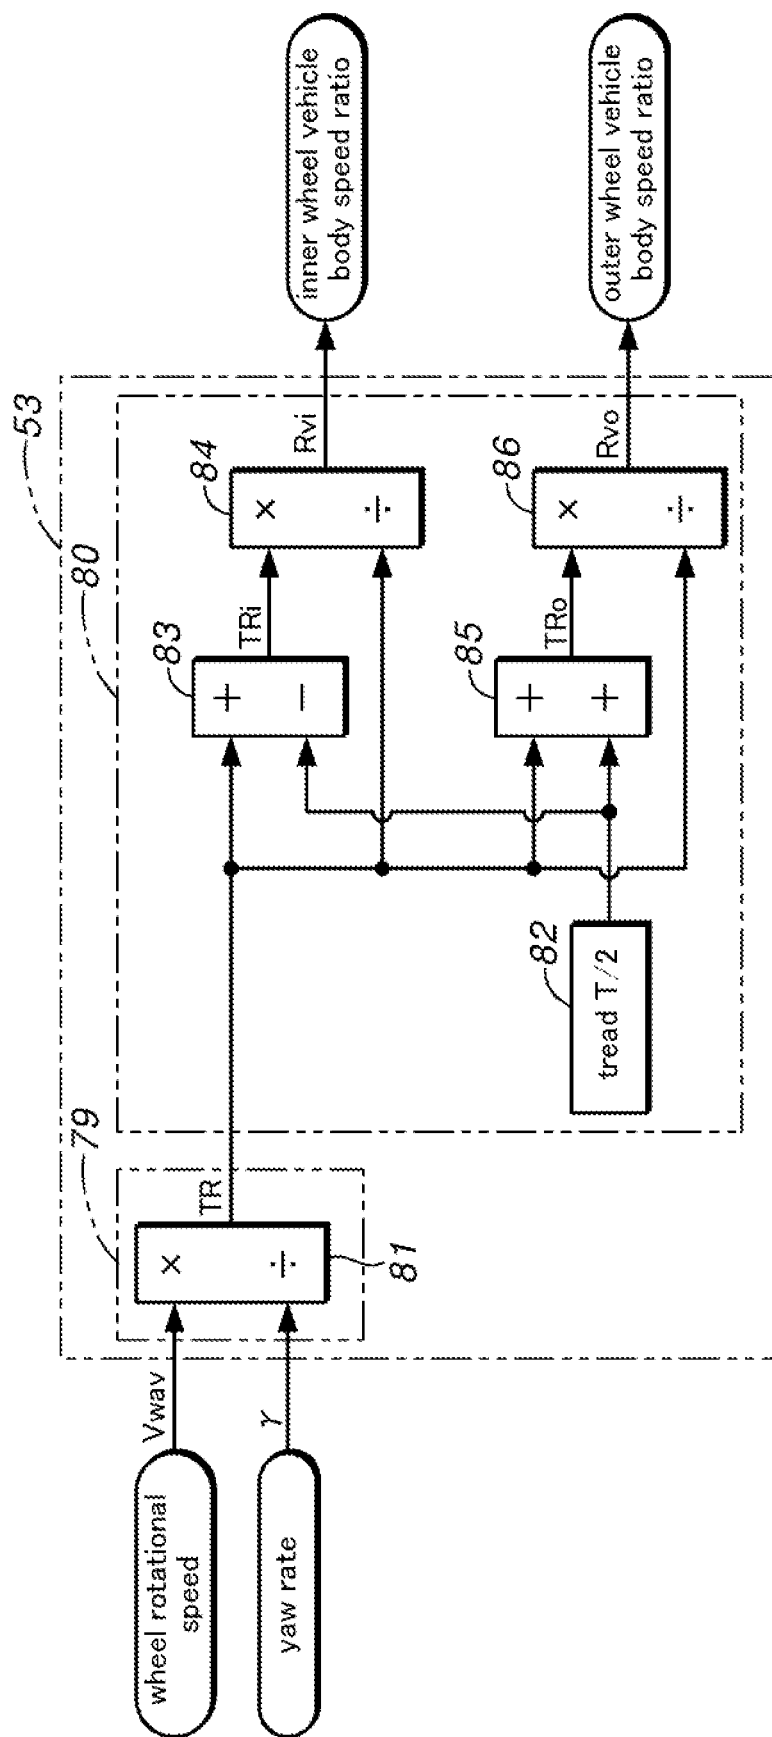


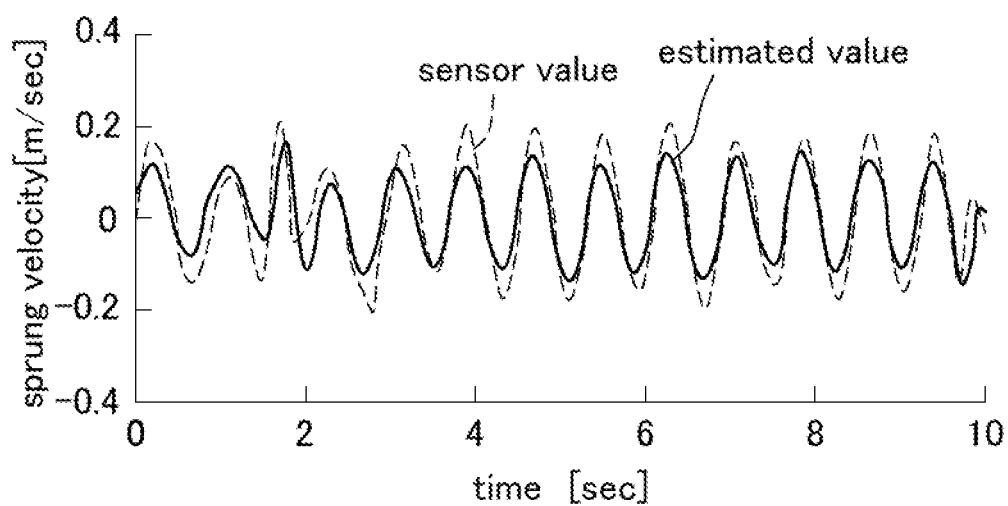
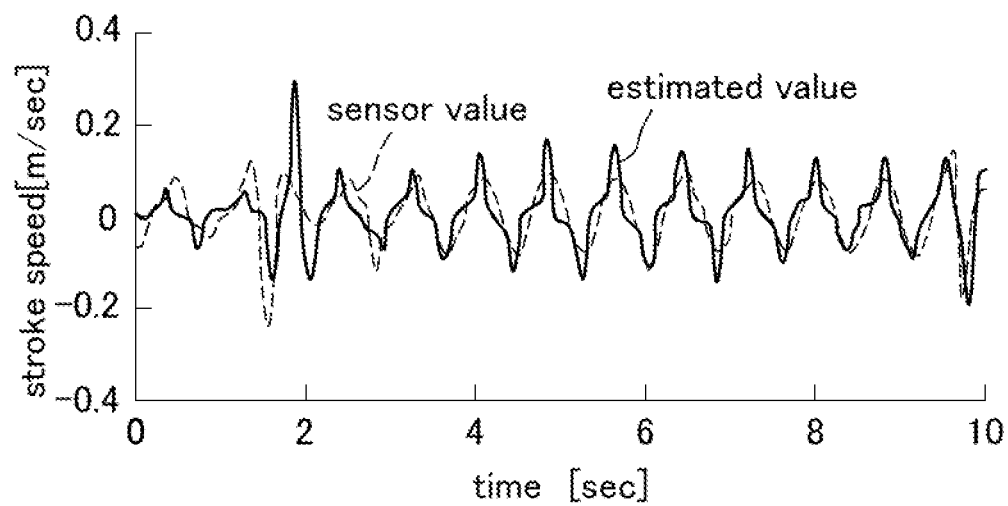
Fig.11A**Fig.11B**

Fig.12

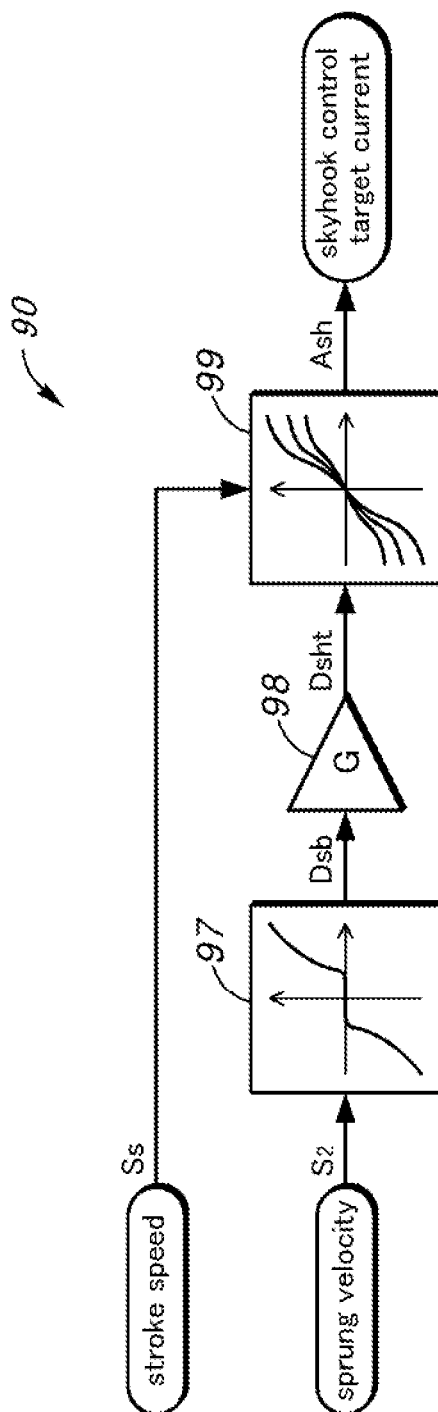


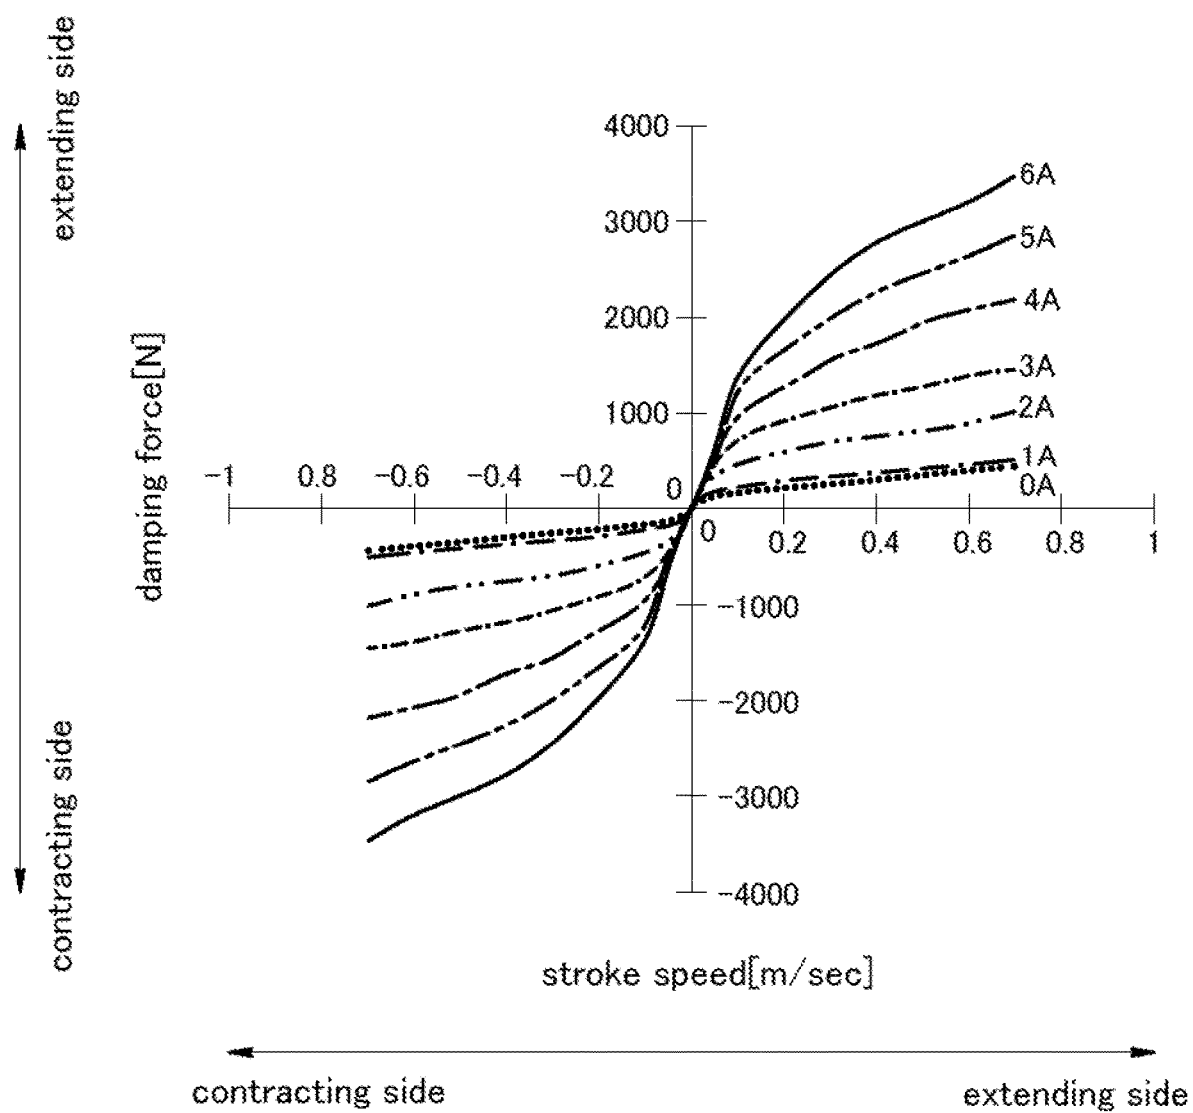
Fig.13

Fig.14

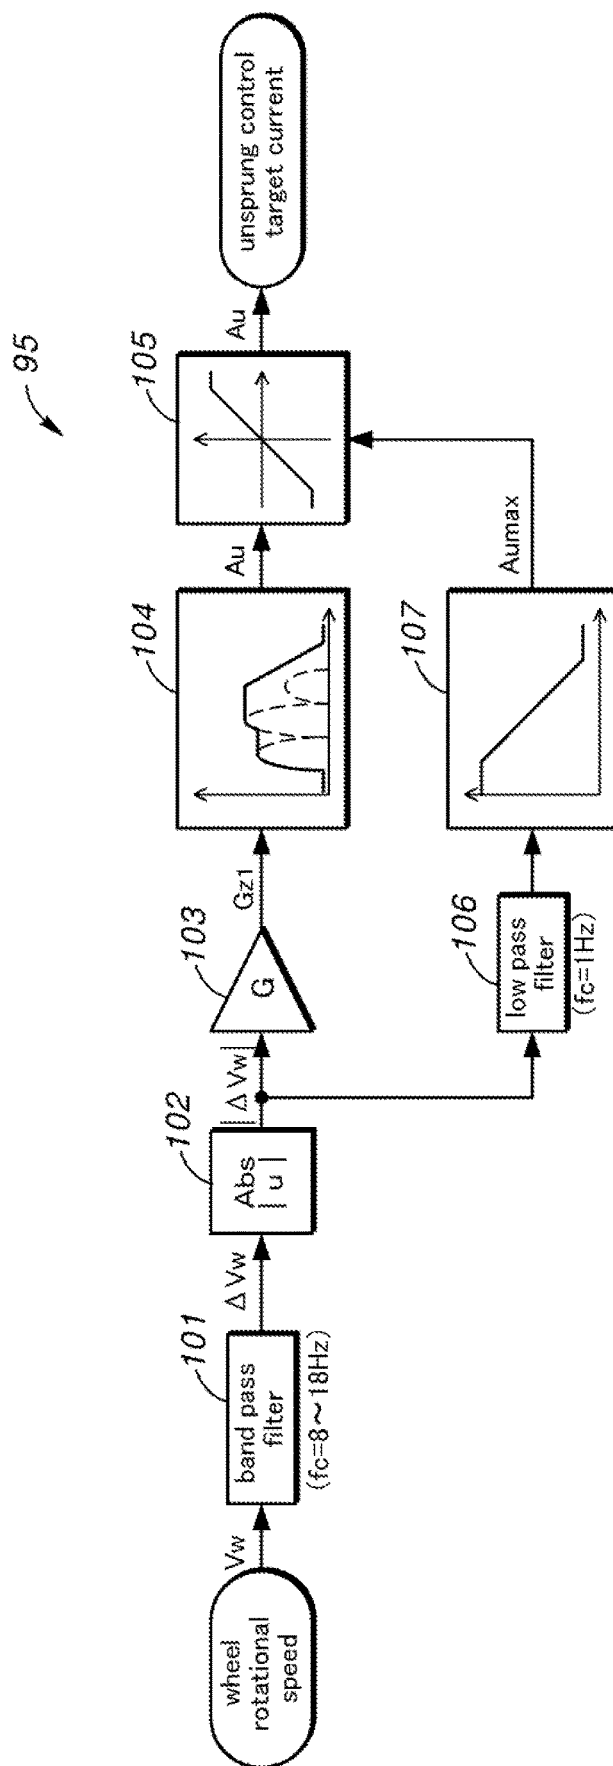


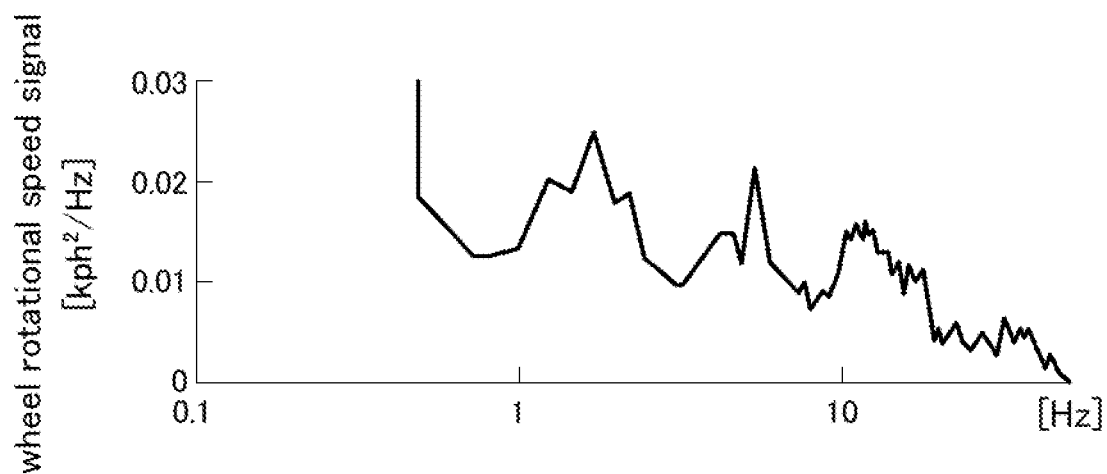
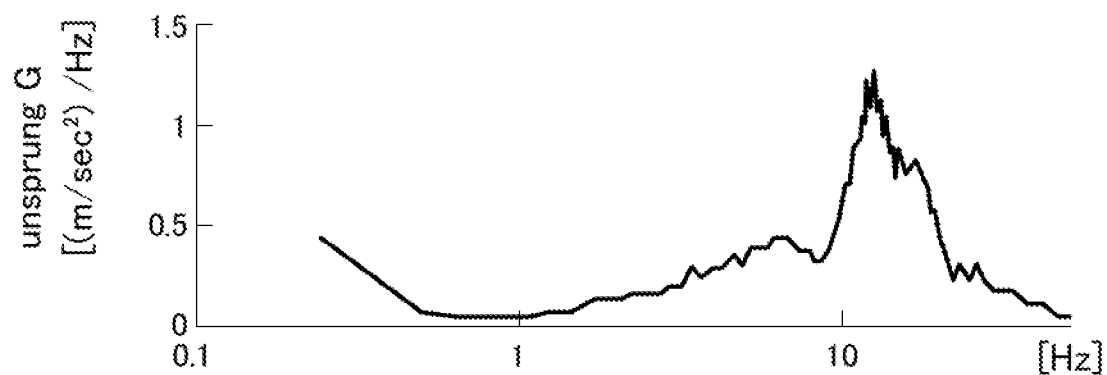
Fig.15A**Fig.15B**

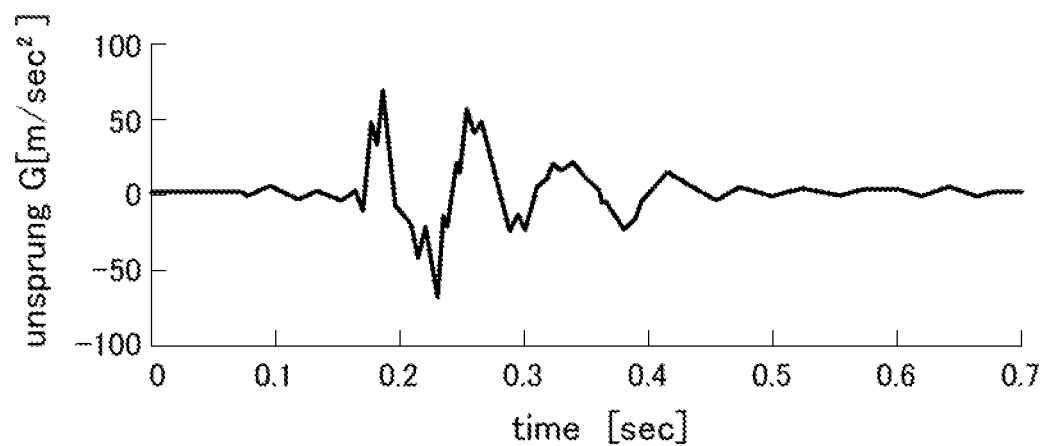
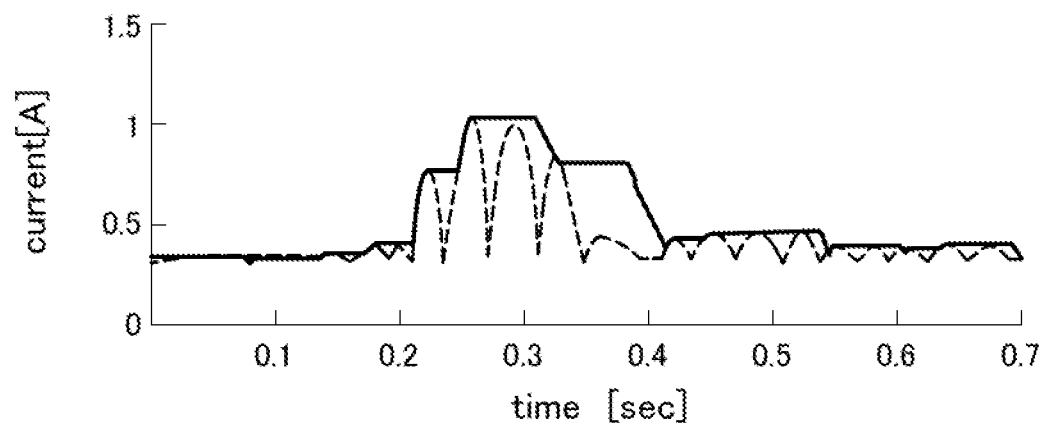
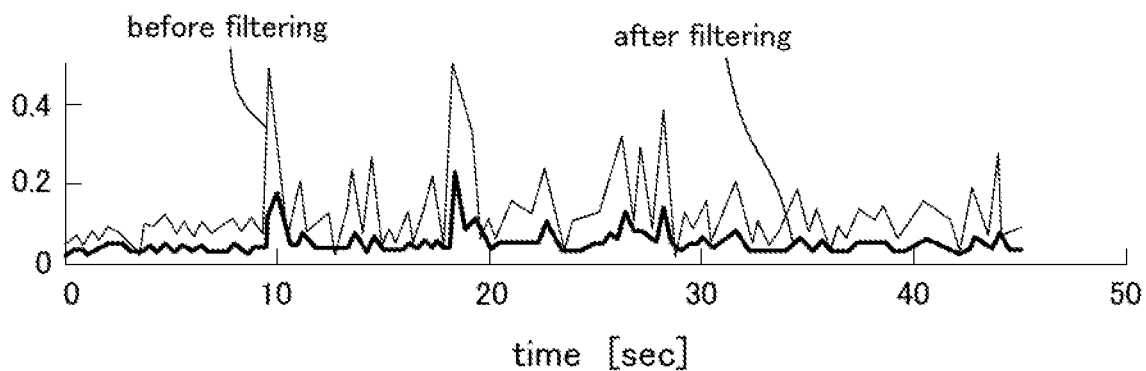
Fig.16A**Fig.16B**

Fig.17A

flat road

**Fig.17B**

rough road

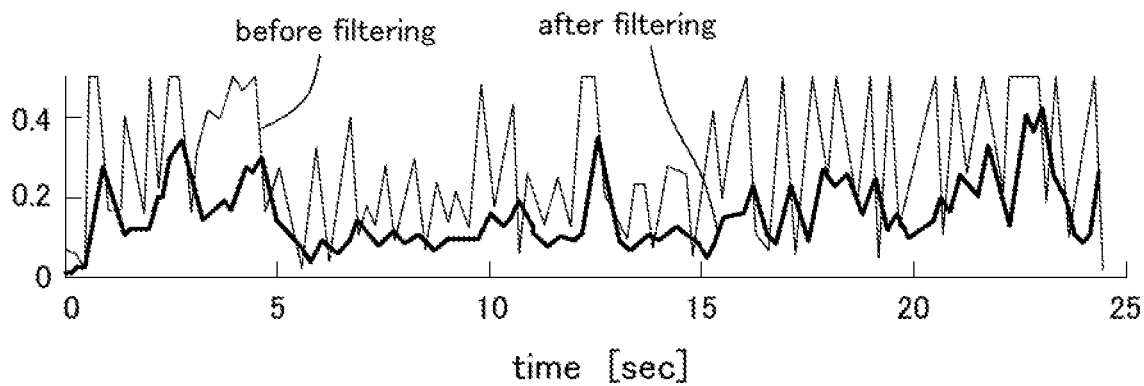
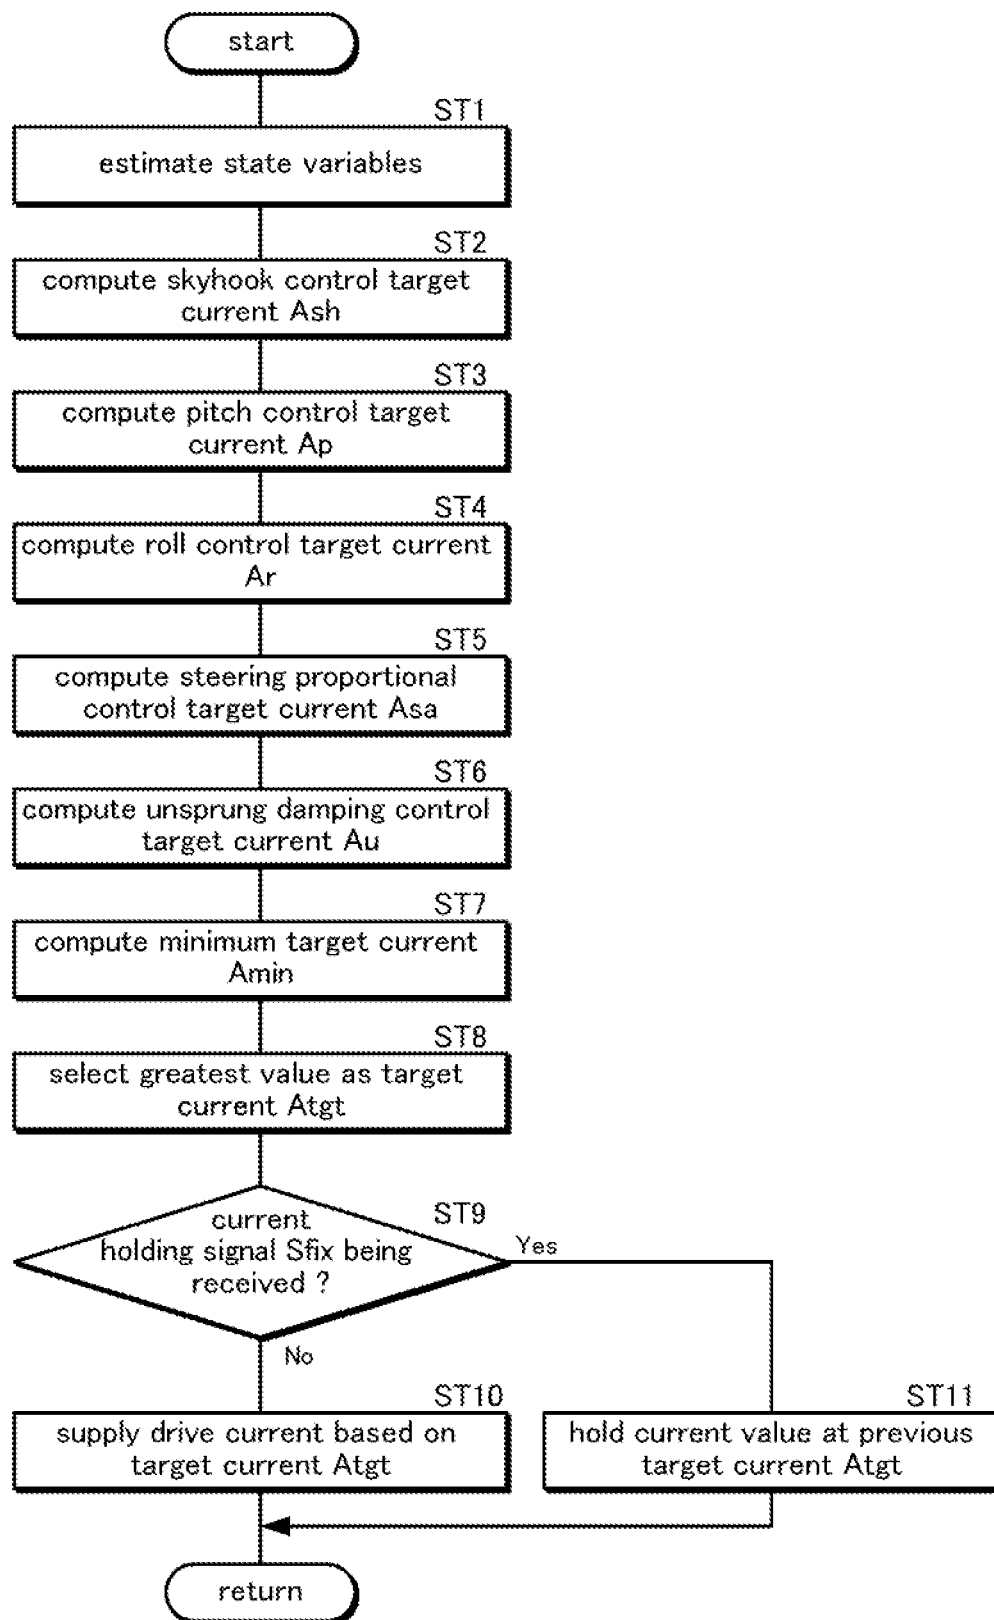


Fig. 18

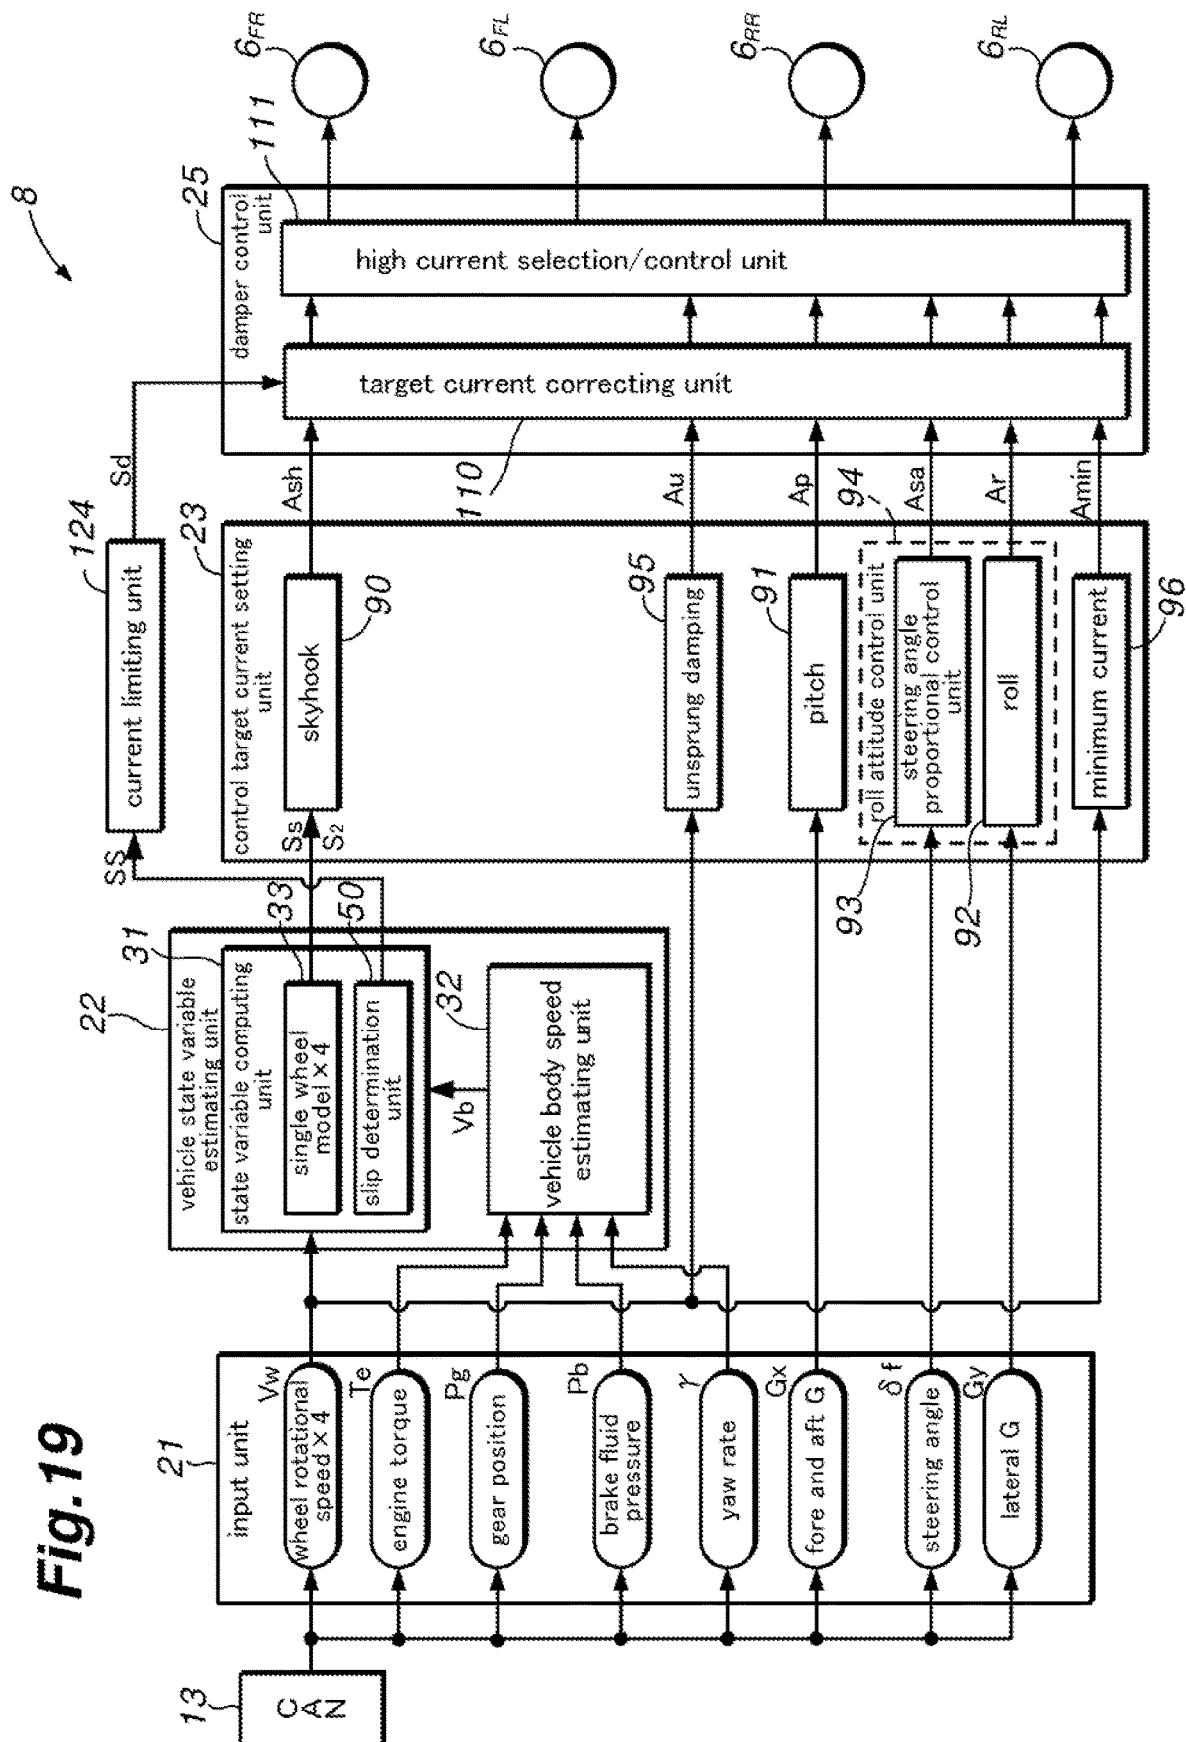



Fig.20

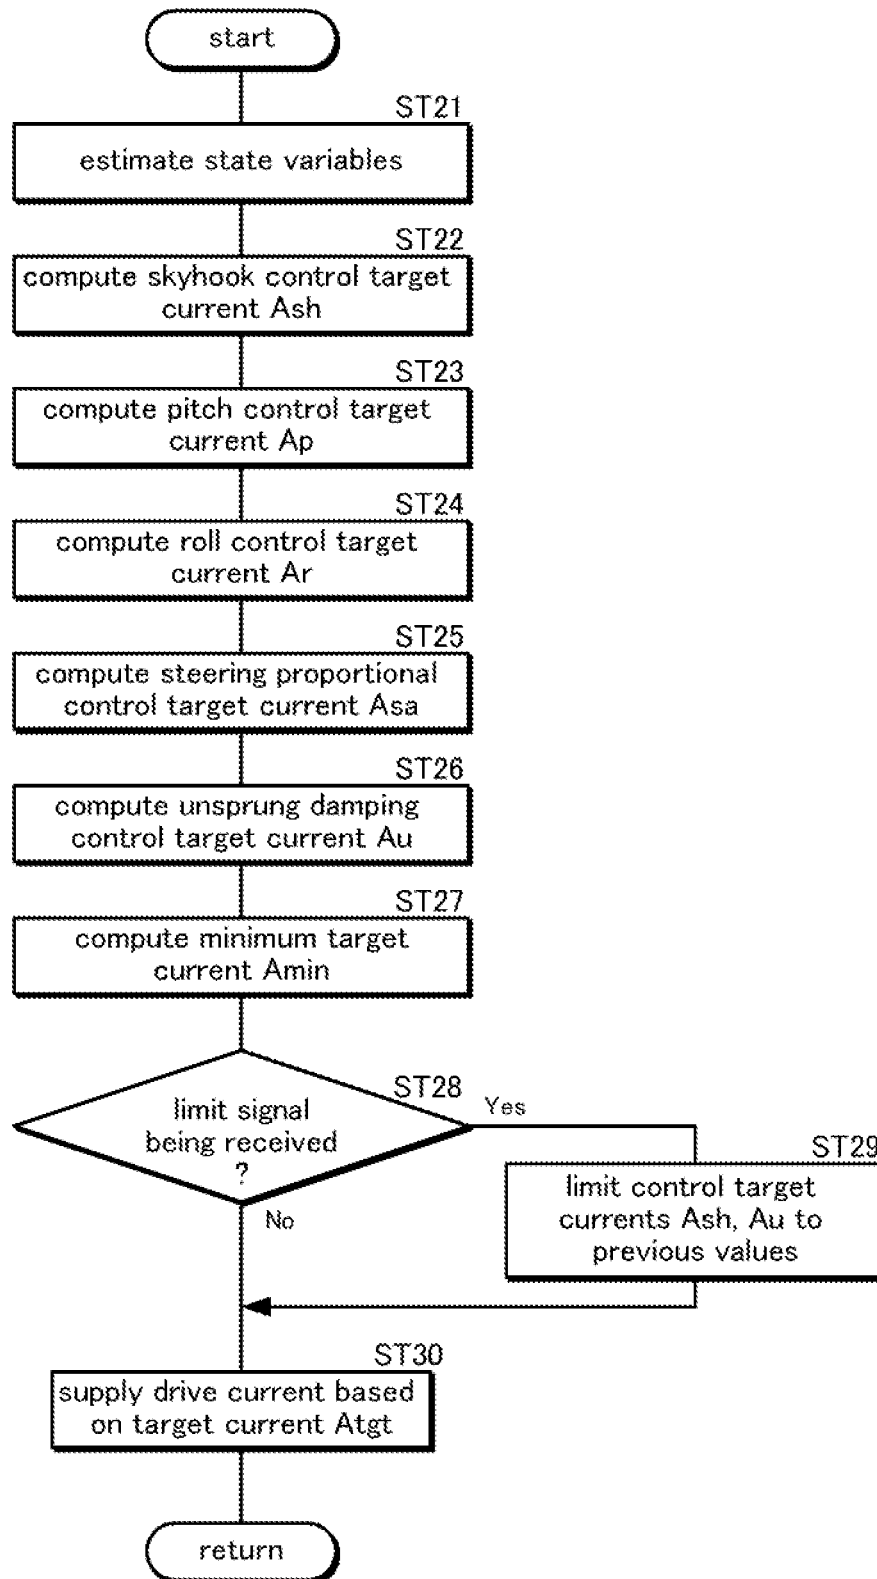Fig.21


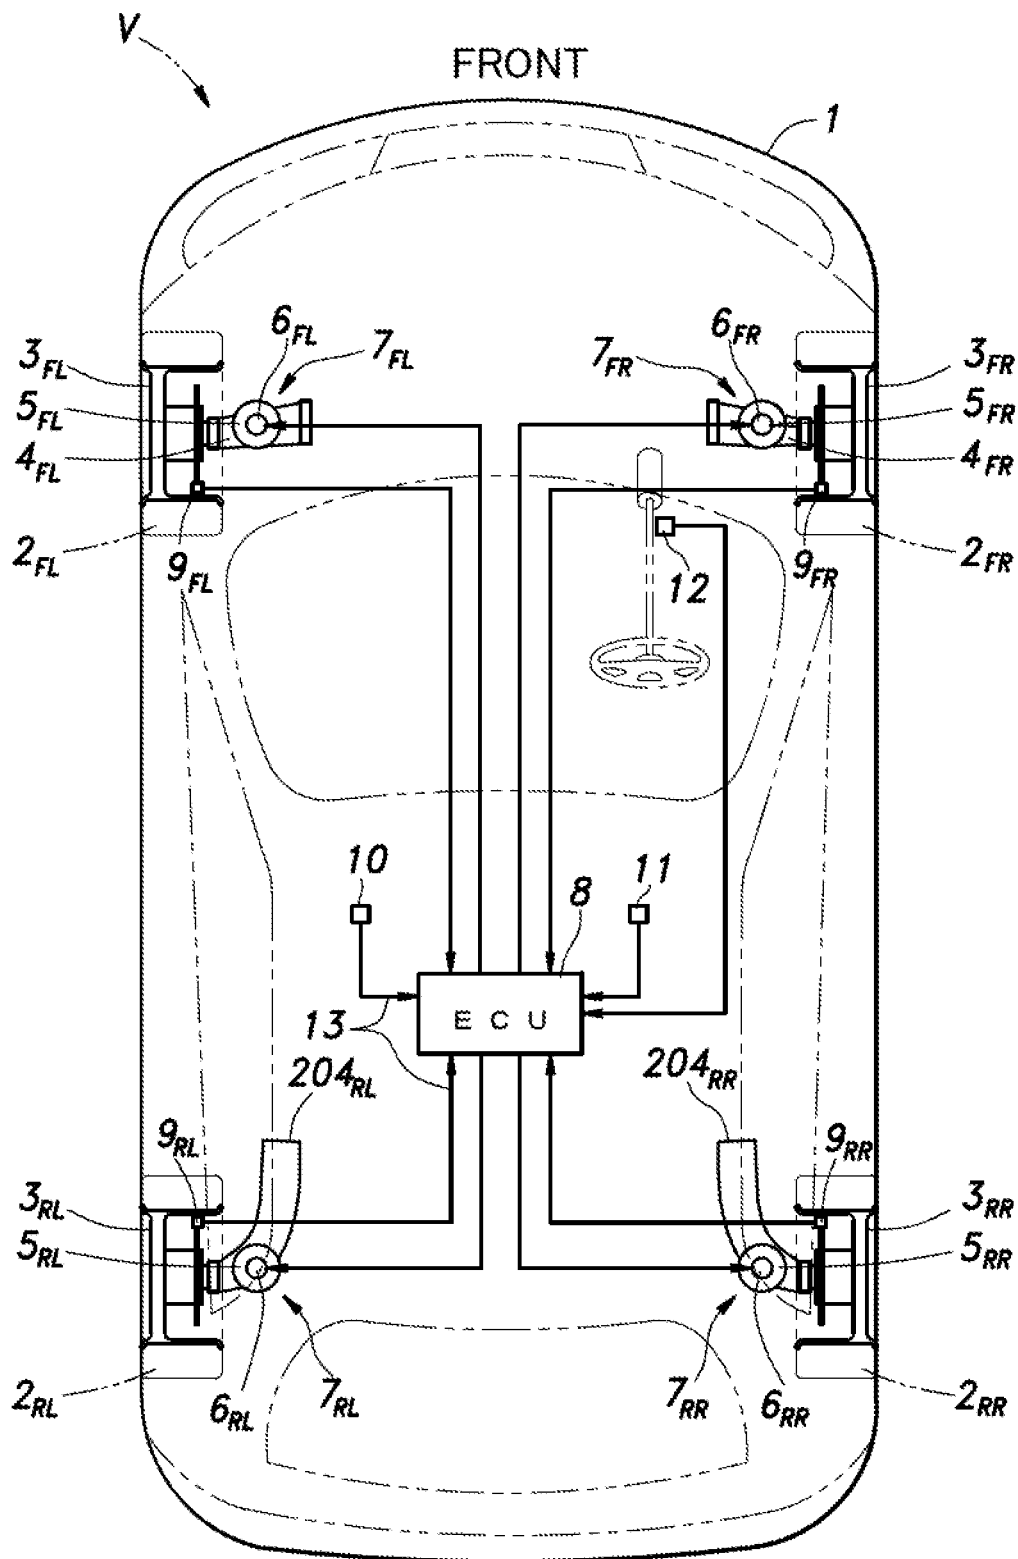


Fig.22

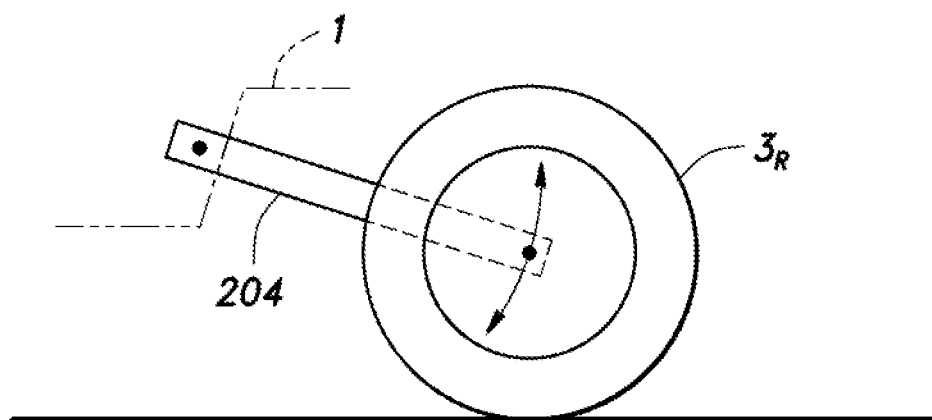

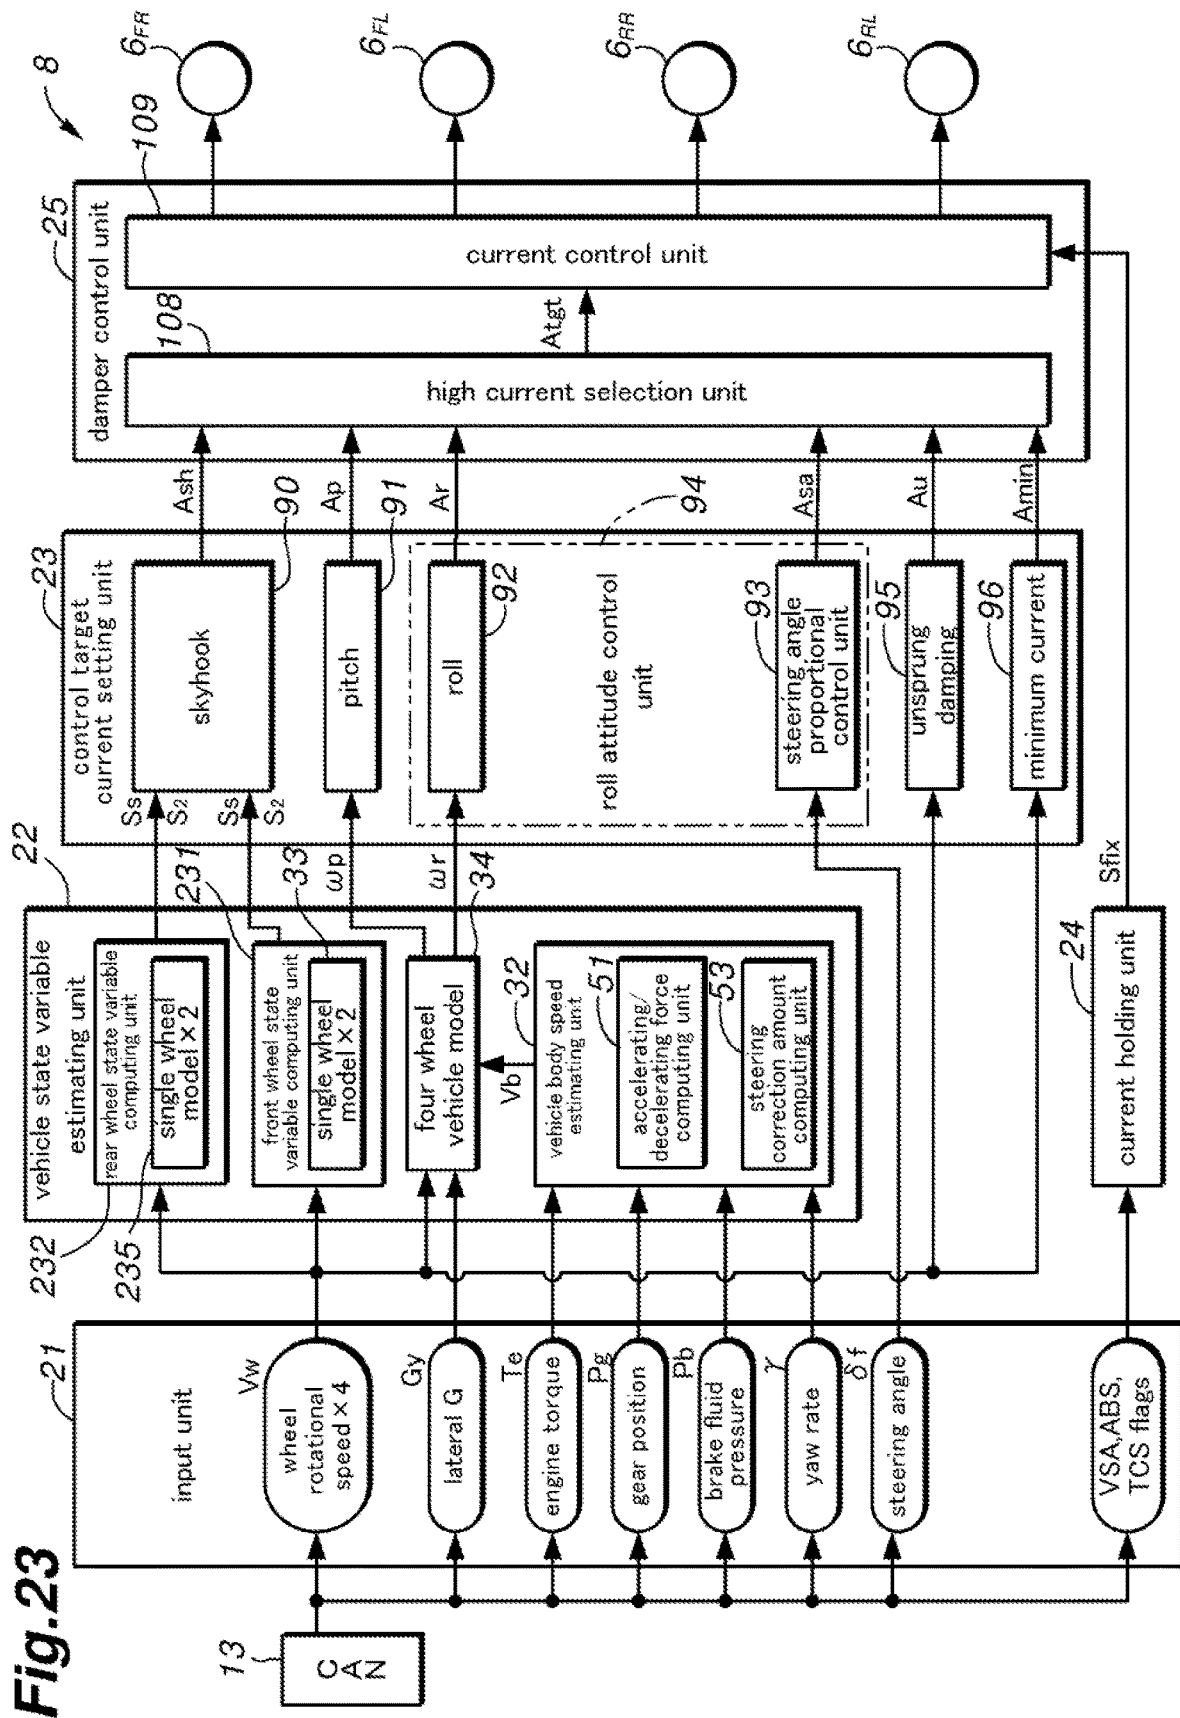


Fig.24

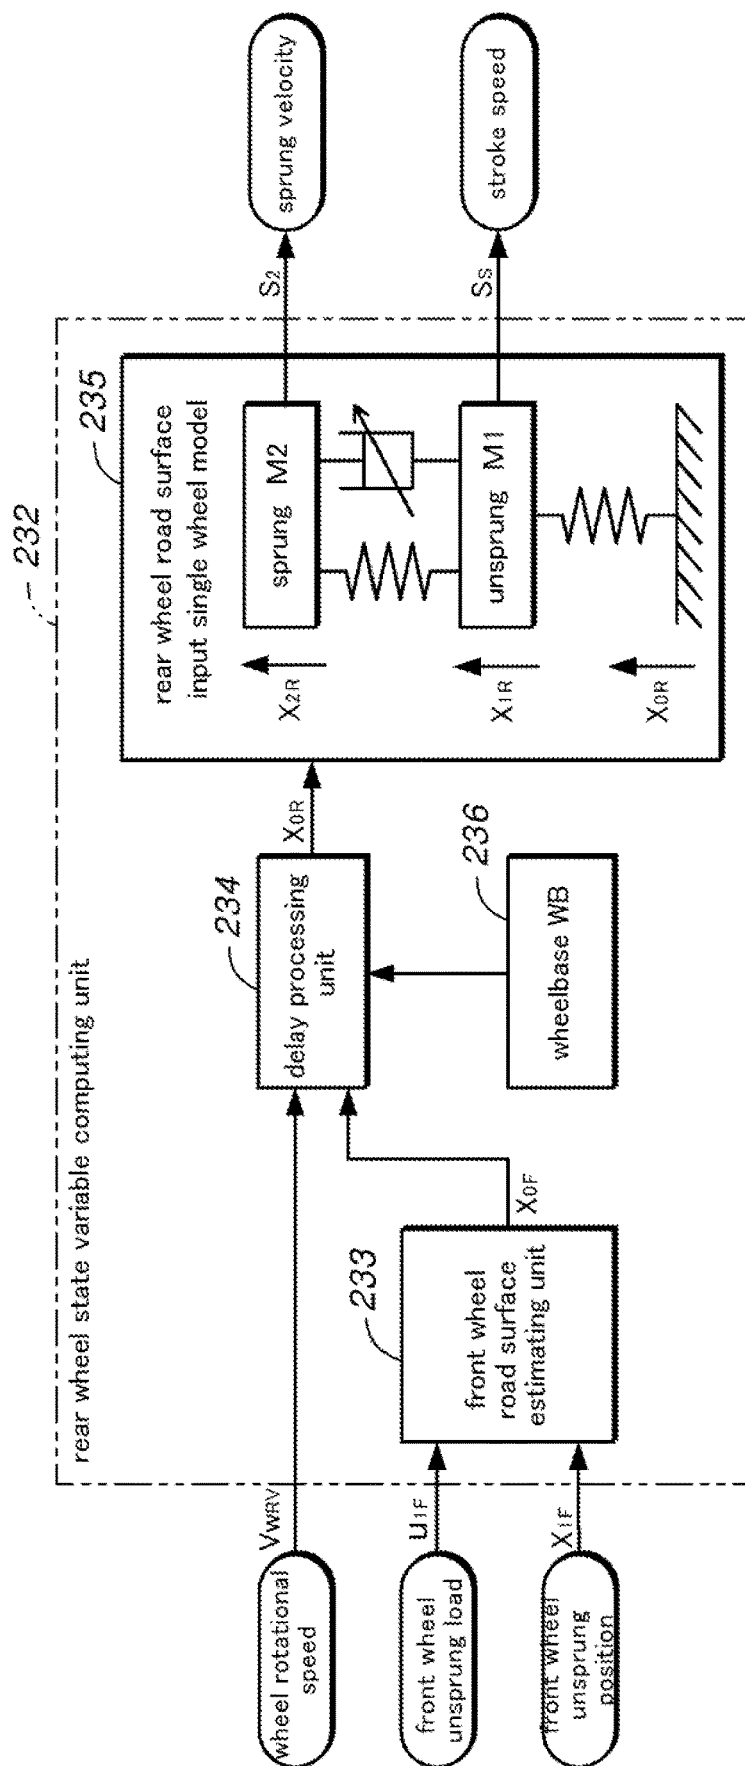
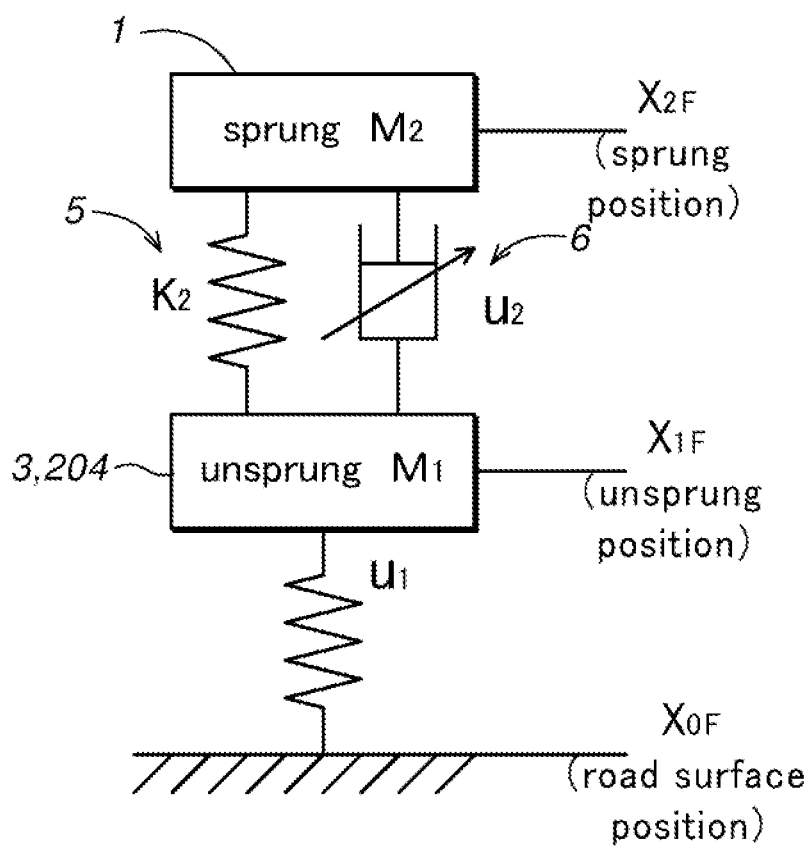


Fig.25

1

SUSPENSION CONTROL SYSTEM

TECHNICAL FIELD

The present invention relates to a vehicle suspension control system provided with a variable damper that can adjust the damping force thereof according to an input signal.

BACKGROUND OF THE INVENTION

In recent years, for use in vehicle suspension systems, various dampers have been developed that can variably control the damping force either in a stepwise fashion or continually. The damping force can be varied not only mechanically by changing the opening area of the orifice provided in the piston by means of a rotary valve but also magnetically by using a magneto-rheological fluid (MRF) for the working fluid, and controlling the viscosity of the fluid by means of a magnetic fluid valve. A vehicle equipped with such a variable damper allows the motion stability and the ride quality of the vehicle to be improved by variably controlling the damping force of the damper according to the operating condition of the vehicle.

As a technology for improving the ride quality, the skyhook control based on the skyhook theory is known. To control the ride quality (vibration) with the skyhook control, the sprung velocity is required to be detected in order to determine the target damping force such that the vertical motion of the sprung mass may be favorably controlled. It is also necessary to detect the stroke speed or the relative velocity between the sprung mass and the unsprung mass in order to perform the skyhook control because the damping force varies in dependence on the stroke speed even when the orifice area and the viscosity of the MRF remain constant.

In a conventional suspension control system performing the skyhook control, each wheel was required to be fitted with a vertical G sensor and/or a stroke sensor for detecting the vertical velocity and the stroke speed of the sprung mass. Such a stroke sensor is required to be placed within the wheelhouse or in an adjacent part of the vehicle body so that there may be some difficulty in finding a space for mounting the stroke sensor. To circumvent such a problem, a suspension control system was developed that computes the relative velocity between the sprung mass and the unsprung mass from variations in the wheel rotational speed and controls the damping force of the damper according to the computed relatively velocity and other data without using a stroke sensor. See Patent Document 1.

PRIOR ART DOCUMENT(S)

Patent Document(s)

Patent Document 1: JP06-48139A

SUMMARY OF THE INVENTION

Task to be Accomplished by the Invention

However, according to the suspension system proposed in Patent Document 1, the relative velocity between the sprung mass and the unsprung mass is computed based on the knowledge that as the wheel moves vertically relative to the vehicle body, the wheel moves also in the fore and aft direction owing the caster angle of the wheel given by the

2

geometry of the suspension system, and this causes the wheel rotational speed to change accordingly. Therefore, when the suspension geometry includes no or a very small caster angle, the relative velocity cannot be computed at all or with any acceptable precision.

The present invention was made with the aim of eliminating such a problem of the prior art, and has an object to provide a suspension control system that can compute the state variables of the vehicle used for the damper control at a high precision without regards to the caster angle provided in the suspension geometry.

Means to Accomplish the Task

To achieve such an object, the present invention provides a suspension control system (20) for a vehicle (V) provided with a variable damper (6) that can adjust a damping force according to an input signal (V_H), comprising: a wheel rotational speed sensor (9) for detecting a wheel rotational speed (V_H); a base input value computing means (37) for computing a base input value (u_1) of the vehicle according to a wheel rotational speed variation (ΔV_H) detected by the wheel speed sensor (9); a state variable computing means (31) for computing a state variable (S_2 , S_s) of the vehicle from a vehicle model (38) representing a behavior of the vehicle and receiving an input of the base input value (u_1); and a damper control means (23, 25) for controlling a damping force of the variable damper (6) according to the computed state variable (S_2 , S_s).

According to this arrangement, the state variables of the vehicle required for the control of the damping force of each damper can be obtained by computing a base input value of a vehicle according to the detected wheel rotational speed variation, and inputting this value to a vehicle model. Therefore, without regards to the caster angle included in the suspension geometry, the state variable of the vehicle can be obtained at a high precision.

According to a certain aspect of the present invention, the base input value includes an unsprung load (u_1).

The wheel rotational speed is inversely proportional to the dynamic load radius of the tire, and the dynamic load radius of the tire is substantially proportional to the road contact load of the wheel. Therefore, the wheel rotational speed variation is substantially proportional to the change in the road contact load of the wheel and hence to the unsprung load applied to the unsprung mass. Thus, the claimed structure allows the unsprung load of each wheel to be accurately computed, and the computed unsprung load may be applied to a vehicle model which produces the state variable of the vehicle used for the damping force control of the damper in a highly accurate manner.

According to another aspect of the present invention, the state variable includes a sprung velocity (S_2).

Thereby, the sprung velocity in the vertical direction of the vehicle can be computed at a high precision by applying a base input value such as the road surface contact load of the wheel to the vehicle model. Therefore, the conventionally required vertical acceleration sensor can be omitted, and the cost can be reduced.

According to yet another aspect of the present invention, the state variable further includes a suspension stroke speed (S_s).

Thereby, the suspension stroke can be computed at a high precision by applying a base input value such as the road surface contact load of the wheel to the vehicle model. Therefore, the conventionally required stroke sensor can be omitted, and the cost can be reduced. Moreover, the stroke

3

sensor was required to be placed in an environmentally harsh condition, and the elimination of the need for the stroke sensor contributes to the improvement in the reliability of the suspension system.

According to yet another aspect of the present invention, the suspension control system further comprises a first filter for the wheel rotational speed sensor for a first frequency region corresponding to a vibration of a sprung mass, and a second filter for the wheel speed sensor for a second frequency range higher than the first frequency range, wherein the damper control means (23) includes a sprung damping control means (90) for controlling the damping force of the variable damper (6) according to the wheel speed variation (ΔV_w) filtered by the first filter (36), and an unsprung damping control means (95) for controlling the damping force of the variable damper (6) according to the wheel speed variation (ΔV_w) filtered by the second filter (101).

According to this arrangement, two signals of different frequency ranges can be obtained from the detection value of the same wheel rotational speed sensor via two different filters so that the same detection signal can be used for two different control purposes, and this contributes to the improvement in the ride quality of the vehicle.

According to yet another aspect of the present invention, the suspension control system further comprises a vehicle body speed estimating means (32) for estimating a vehicle body speed (Vb) according to a vehicle body acceleration (Gx) of the vehicle, and a wheel rotational speed correcting means (35) for computing a corrected wheel rotational speed by subtracting an estimated wheel rotational speed (Vbi, Vbo) estimated from the vehicle body speed from a detected value of the wheel rotational speed sensor (9), wherein the base input value computing means (37) is configured to compute the base input value (u_1) of the vehicle according to a wheel speed variation (ΔV_w) of the corrected wheel rotational speed.

According to this arrangement, because the wheel rotational speed is corrected by subtracting the estimated wheel rotational speed based on the vehicle body speed from the detected value of the wheel rotational speed sensor when computing the base input value of the vehicle, even when the vehicle is accelerating or decelerating, the components of the wheel rotational speed variation due to the acceleration or deceleration can be eliminated, and the state variable of the vehicle can be computed at a high precision.

According to yet another aspect of the present invention, the vehicle body speed estimating means (32) estimates the vehicle body acceleration (Gx) of the vehicle according to a drive/brake force (Fe, Fb) of the vehicle and an inclination of a road surface (or a deceleration Fs due to a road inclination). In other words, the vehicle body speed estimating means (32) may comprise a road surface inclination decelerating force computing unit (56) for computing a decelerating force (Fs) of the vehicle (V) owing to the road surface inclination, an accelerating force computing unit (55) for computing the accelerating force other than that due to the road surface inclination, a decelerating force computing unit (57) for computing the decelerating force (Fd) of the vehicle (V) owing to causes other than the road surface inclination, and a vehicle body speed computing unit (52) for computing the vehicle body speed (Vb) from the acceleration/deceleration of the vehicle.

According to this arrangement, because the vehicle body acceleration can be estimated at a high precision, and the vehicle body speed variation component can be accurately removed from the detection value of the wheel rotational

4

speed sensor, the base input value of the vehicle and the associated state variable of the vehicle can be computed at a high precision.

According to yet another aspect of the present invention, the vehicle body speed estimating means (32) estimates a traveling resistance (Fr) of the vehicle according to the detected wheel rotational speed (Vwav), and estimates the vehicle body acceleration (Gx) of the vehicle by taking into account the estimated traveling resistance (Fr). In other words, the vehicle body speed estimating means (32) may further comprise a running resistance computing unit (59) for computing the running resistance so that the vehicle body speed computing unit 52 may compute the vehicle speed (Vb) according to the running resistance (Fr) of the vehicle.

Thereby, by taking into account the running resistance of the vehicle as well as the drive/brake force of the vehicle and the road surface inclination, the vehicle body acceleration can be estimated at a high precision, and the vehicle body speed variation component can be accurately removed from the detection value of the wheel rotational speed sensor so that the base input value of the vehicle and the associated state variable of the vehicle can be computed at a high precision.

According to yet another aspect of the present invention, the suspension control system further comprises a filter (36) for a frequency range corresponding to a vibration of the sprung mass, the filter (36) filtering the detected value of the wheel rotational speed sensor (9) so as to remove variation in the vehicle body acceleration (Gx) in the frequency range corresponding to a vibration of the sprung mass.

According to this arrangement, in addition to the correction based on the estimated wheel rotational speed, the detection value of the wheel rotational speed sensor is passed through the filter for a frequency range corresponding to a vibration of the sprung mass so that the variation component of the vehicle body speed can be effectively eliminated, and the state variable of the vehicle can be computed at a high precision.

According to yet another aspect of the present invention, the suspension control system further comprises a cornering state variable computing means (53) for computing a cornering state variable (Rvi, Rvo) and a wheel rotational speed correcting means (35) for correcting a detected value of the wheel rotational speed sensor (9) according to the computed cornering state variable (Rvi, Rvo), wherein the base input value computing means (37) computes the base input value (u_1) of the vehicle according to the wheel speed variation (ΔV_w) of the corrected wheel rotational speed.

According to this arrangement, because the detected value of the wheel rotational speed sensor is corrected by the cornering state variable when computing the base input value of the vehicle, even when the vehicle is cornering, the variation component of the wheel rotational speed owing to the cornering maneuver can be eliminated, and the state variable of the vehicle can be computed at a high precision.

According to yet another aspect of the present invention, the suspension control system further comprises a wheel speed variation extracting means (36) for extracting a wheel speed variation (ΔV_w) of a frequency range corresponding to a sprung vibration of the vehicle according to the detected wheel rotational speed, a sprung velocity computing means (33, 45) for computing the sprung velocity (S_2) by using a vehicle model (8) according to the wheel speed variation (ΔV_w) extracted by the wheel speed variation extracting means (36), a stroke speed computing means (33, 46) for computing a suspension stroke speed (Ss) by using a vehicle

5

model (8) according to the wheel speed variation (ΔV_w) extracted by the wheel speed variation extracting means (36), and a skyhook control means (90, 25) for controlling the damping force of the variable damper (6) according to the computed sprung velocity (S_2) and the computed stroke speed (S_s).

The wheel rotational speed is inversely proportional to the dynamic load radius of the tire, and the dynamic load radius of the tire is substantially proportional to the road contact load of the wheel. Therefore, the wheel rotational speed variation is substantially linear or proportional to the change in the road contact load of the wheel and hence to the unsprung load applied to the unsprung mass. Therefore, by thus computing the sprung velocity and the stroke speed according to the wheel rotational speed variation extracted by the wheel speed variation extracting means, the damping force of the variable damper can be controlled by the skyhook control based on this computed data. Therefore, the need for the stroke sensor and the vertical G sensor for the sprung mass can be eliminated, and the suspension control system is enabled to perform the skyhook control at a low cost.

According to yet another aspect of the present invention, the wheel rotational speed sensor (9) is provided on a front wheel (3_F), and the base input value computing means (37) computes the base input value (u_{1F}) with respect to the front wheel (3_F), the state variable computing means (31) including a front wheel state variable computing means (231) for computing a state variable (S_2 , S_s) of the vehicle associated with the front wheel (3_F), and a rear wheel state variable computing means (232) for computing a state variable (S_2 , S_s) of the vehicle associated with a rear wheel (3_R) according to the state variable computed by the front wheel state variable computing means (231).

According to this arrangement, the state variable of the vehicle associated with each rear wheel can be computed from the detection value of the wheel rotational speed sensor of the corresponding front wheel. Therefore, the wheel rotational speed sensor for the rear wheel can be omitted. If the rear wheel is connected to the vehicle body via a trailing arm, the accuracy of the computation of the state variable could be impaired because the rear wheel moves in the fore and aft direction as the rear wheel moves vertically. On the other hand, according to the claimed structure, because the state variable of the rear wheel is obtained from the wheel rotational speed variation of the front wheel, the use of the trailing arm does not reduce the accuracy of the computation, and the state variable of the rear wheel can be obtained at a high precision.

According to yet another aspect of the present invention, the base input value computing means (37) computes a base input value including an unsprung load (u_{1F}) associated with the front wheel (3_F), and the front wheel state variable computing means (231) computes a state variable including an unsprung position (x_1) associated with the front wheel (3_F), the rear wheel state variable computing means (232) being configured to compute a road surface vertical position (x_{0F}) associated with the front wheel (3_F) according to the unsprung load (u_{1F}) associated with the front wheel (3_F) and the unsprung position (x_{1F}) associated with the front wheel (3_F), and compute the state variable (S_2 , S_s) of the vehicle associated with a rear wheel (3_R) according to the computed road surface vertical position (x_{0F}) associated with the front wheel (3_F).

According to this arrangement, because the road surface condition can be determined from the vertical position of the front wheel road surface computed from the wheel rotational

6

speed variation of the front wheel, and the state variable of the rear wheel is computed based on the road surface condition, the state variable of the rear wheel can be obtained at a high precision.

According to yet another aspect of the present invention, the rear wheel state variable computing means (232) is configured to compute a road surface vertical position (x_{0R}) associated with the rear wheel (3_R) by applying a time delay corresponding to a vehicle speed to the road surface vertical position (x_{0F}) associated with the front wheel (3_F), and compute the state variable (S_2 , S_s) of the vehicle associated with the rear wheel (3_R) according to the road surface vertical position (x_{0R}) of the vehicle associated with the rear wheel (3_R).

According to this arrangement, the vertical position of the rear wheel road surface is computed by applying a time delay depending on the vehicle speed to the vertical position of the front wheel road surface, and this allows the vertical position of the rear wheel road surface to be computed at a high precision.

According to yet another aspect of the present invention, the rear wheel state variable computing means (232) is configured to compute state variables including the sprung velocity (S_2) and the suspension stroke speed (S_s) associated with the rear wheel (3_R).

According to this arrangement, the sprung velocity of the rear wheel and the associated stroke speed can be computed from the base input value of the front wheel at a high precision. Therefore, the conventionally required vertical G sensor and the stroke sensor can be eliminated so that the cost can be reduced, and the reliability of the suspension system can be improved.

Effect of the Invention

Thus, the present invention provides a suspension control system that allows a state variable of a vehicle used for the damper damping force control to be computed at a high precision without regards to the caster angle given to the suspension geometry.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram showing the overall structure of a vehicle incorporated with a suspension control system given as a first embodiment of the present invention;

FIG. 2 is a diagram showing a model of the suspension shown in FIG. 1;

FIG. 3 is a block diagram showing the overall structure of the suspension control system shown in FIG. 1;

FIG. 4 is a block diagram of the state variable estimating unit shown in FIG. 3;

FIG. 5 is a time chart showing the relationship between the wheel rotational speed and the road contract load in the unsprung mass single wheel model shown in FIG. 4;

FIG. 6 is a graph showing the relationship between the wheel rotational speed variation and the road contact load variation in the unsprung load single wheel model shown in FIG. 4;

FIG. 7 is a block diagram of the unsprung load single wheel model shown in FIG. 4;

FIG. 8 is a block diagram of the vehicle body speed estimating unit shown in FIG. 3;

FIG. 9 is a block diagram of an essential part of the vehicle body speed estimating unit shown in FIG. 8;

FIG. 10 is a block diagram of the steering correction amount computing unit shown in FIG. 8;

7

FIG. 11A is a time chart comparing the estimated value of the sprung velocity of the single wheel model shown in FIG. 4 and the sensor value;

FIG. 11B is a time chart comparing the estimated value of the stroke speed of the single wheel model shown in FIG. 4 and the sensor value;

FIG. 12 is a block diagram of the skyhook control computing unit shown in FIG. 3;

FIG. 13 is a target current map which is used in the target current setting unit shown in FIG. 12;

FIG. 14 is a block diagram of the unsprung mass vibration control computing unit shown in FIG. 3;

FIG. 15 compares the frequency response diagrams of the wheel rotational speed and the unsprung acceleration;

FIG. 16 compares the time charts of the unsprung acceleration and the target current processed by the peak hold ramp down circuit shown in FIG. 14;

FIG. 17A is a time chart of the wheel rotational speed variation when traveling over a smooth road surface before and after the low-pass filter processing;

FIG. 17B is a time chart of the wheel rotational speed variation when traveling over a rough road surface before and after the low-pass filter processing;

FIG. 18 is a flowchart showing the process of controlling the damping force by the suspension control system shown in FIG. 3;

FIG. 19 is a block diagram showing the overall structure of a suspension control system given as a second embodiment of the present invention;

FIG. 20 is a flowchart showing the process of controlling the damping force by the suspension control system shown in FIG. 19;

FIG. 21 is a block diagram showing the overall structure of a suspension control system given as a third embodiment of the present invention;

FIG. 22 is a simplified side view of the rear wheel suspension shown in FIG. 21;

FIG. 23 is a block diagram showing the overall structure of the suspension control system shown in FIG. 21;

FIG. 24 is a block diagram of the rear wheel state variable computing unit shown in FIG. 23; and

FIG. 25 is a diagram showing the model of the rear wheel suspension shown in FIG. 21.

EMBODIMENT(S) OF THE PRESENT INVENTION

Embodiments of the suspension control system 20 according to the present invention as applied to a four-wheel motor vehicle are described in the following with reference to the appended drawings. In the appended drawings, the four wheels and the associated elements such as the dampers 6 and the wheel rotational speeds V_w are indicated by numerals or letters followed by a suffix to indicate which of the wheels they correspond to, such as the wheel 3_{FL} (front left), wheel 3_{FR} (front right), 3_{RL} (rear left) and wheel 3_{RR} (rear right). These suffixed numerals or letters may also be used to indicate the corresponding components collectively by substituting the suffices in an appropriate manner, such as front wheels 3_F and rear wheels 3_R.

First Embodiment

Overall Structure of the Vehicle V

Referring to FIG. 1, the overall structure of the vehicle V of the first embodiment is described in the following. The

8

vehicle body 1 of the vehicle V is provided with wheels 3 on four corner parts thereof, each wheel 3 being fitted with a tire 2 and supported by the vehicle body 1 via a suspension system 7 consisting of a suspension arm 4, a spring 5, a variable damper (which will be simply referred to as a damper 6 in the following description), and so on. The vehicle V is additionally provided with a wheel rotational speed sensor 9 provided in association with each wheel 3 for detecting the wheel rotational speed V_w of the corresponding wheel 3, an ECU (electronic control unit) 8 for controlling the various parts of the vehicle V and various sensors arranged in appropriate parts of the vehicle body, such as a lateral G sensor 10 for detecting the lateral acceleration G_y of the vehicle body, a yaw rate sensor 11 for detecting the yaw rate γ of the vehicle body 1 and a steering angle sensor 12 for detecting the steering angle δ_s .

Although not shown in the drawings, the vehicle V may be provided with an ABS (antilock brake system) for preventing the locking of the wheels at the time of braking, a TCS (traction control system) for preventing the slipping of the wheels at the time of acceleration, and a vehicle stability control system (such as a VSA system) for a yaw moment control and a brake assist control during a cornering. The ABS, TCS and VSA are configured to determine the slipping of the wheel by detecting the deviations of the detected value of the wheel rotational speed sensor from the computed wheel rotational speed based on the estimated vehicle body speed V_b , and stabilize the behavior of the vehicle by optimally controlling the braking force and the traction of the vehicle according to the particular traveling condition of the vehicle.

Furthermore, a brake pressure sensor for detecting the brake fluid pressure P_b of the brake device, a torque sensor for detecting the drive torque T_e and a gear position sensor for detecting the gear position P_g of the transmission system are arranged in suitable parts of the vehicle V.

The ECU 8 comprises a microcomputer, ROM, RAM, a peripheral circuit, an input/output interface and various drivers, and is connected to the dampers of the wheels 3 and the various sensors 9 to 12 via a communication line which in this embodiment consists of a CAN (controller area network) 13. The ECU 8 and these sensors 9 to 12 jointly form the suspension control system 20.

The dampers 6 of the illustrated embodiment consist of a mono-tube type (de Carbon type) damper which includes a cylinder filled with MRF, a piston rod having a piston fixed at a free end thereof slidably received in the cylinder and separating the cylinder into an upper oil chamber and a lower oil chamber. The piston further includes a communication passage communicating the upper oil chamber and the lower oil chamber with each other, and an MLV coil positioned in this communication passage. This is a per se known structure.

The damper 6 of the illustrated embodiment is mounted in the suspension such that the lower end of the cylinder is connected to the upper face of the suspension arm 4 which is on the side of the wheel, and the upper end of the piston rod is connected to a damper base (a wheel house upper) which is on the side of the vehicle body. This is schematically illustrated in FIG. 2. An unsprung mass (moveable parts in the lower part of the suspension including the wheel 3, the knuckle and the suspension arm 4) having a mass M_1 is connected to a sprung mass consisting of the vehicle body and having a mass M_2 via a spring 5.

When electric current is supplied to the MLV coil, the MRF that flows through the communication passage is subjected to a magnetic field, forming chain-like clusters of

ferromagnetic particles. As a result, the apparent viscosity (simply referred to as "viscosity" in the following description) of the MRF that passes through the communication passage increases so that the damping force of the damper 6 increases.

<<ECU 8>>

Referring to FIG. 3, the structure of the ECU 8 for controlling the damper 6 as a part of the suspension control system 20 is described in the following. The ECU 8 is not only responsible for the control of the damper 6 but also for the control of the ABS, TCS and VSA, but the vehicle behavior control unit that controls the ABS, TCS and VSA is omitted from the following description.

The essential components of the ECU 8 include an input unit 21 connected to the various sensors 9 to 12 and the vehicle behavior control unit, a vehicle state variable estimating unit 22 for estimating the state variables of the vehicle from the detection signals of the sensors 9 to 12, a control target current setting unit 23 for setting a plurality of control target current values for each damper with the aim of improving the motion stability and/or the ride quality, a current holding unit 24 for holding the drive current of each damper 6 by setting a current holding signal Sfix according to a prescribed condition, and a damper control unit 25 for controlling the damping force of each damper by selecting a target current value Atgt from various sorts of control target current values set by the control target current setting unit 23, and generating the drive current for the damper 6 (MLV coil) with the aid of the current holding signal Sfix.

<Vehicle State Variable Estimating Unit 22>

The vehicle state variable estimating unit 22 is configured to estimate the state variables of the vehicle V by making use of the fact that the wheel rotational speed variation ΔV_w is related to the road contact load variation in a certain way, and includes a state variable computing unit 31 for estimating the various state variables of the vehicle V for each wheel by using a vehicle model, and a vehicle body speed estimating unit 32 for computing the vehicle body speed Vb (inner wheel side vehicle body speed Vbi and outer wheel side vehicle body speed Vbo) which provides a wheel rotational speed correction value for the state variable computing unit 31. The state variable computing unit 31 includes a single wheel model computing unit 33 for each of the wheels, a four wheel model computing unit 34, and a slip determination unit 50 (See FIG. 4). The vehicle body speed estimating unit 32 includes an accelerating/decelerating force computing unit 51 and a steering correction amount computing unit 53 for computing a correction amount due to a steering operation. The various components of the vehicle state variable estimating unit 22 are described in the following with reference to FIGS. 4 to 11.

<State Variable Computing Unit 31>

As shown in FIG. 4, in the state variable computing unit 31, each received wheel rotational speed (signal) V_w is forwarded to a subtractor 35 as a minuend. The subtractor 35 also receives the inner wheel side vehicle body speed Vbi or the outer wheel side vehicle body speed Vbo as a subtrahend so that the wheel rotational speed V_w is corrected by subtracting the inner wheel side vehicle body speed Vbi or the outer wheel side vehicle body speed Vbo from the wheel rotational speed V_w of each wheel. The subtractor 35 thus functions as a wheel rotational speed variation computing means for computing the wheel rotational speed variation ΔV_w according to the wheel rotational speed V_w .

The inner wheel side vehicle body speed Vbi or the outer wheel side vehicle body speed Vbo forwarded to the subtractor 35 is computed for the purpose of removing the

wheel rotational speed variation component owing to the speed variation of the vehicle V and the difference in the trajectory lengths of the inner and outer wheels owing to the difference of the turning radii thereof. In other words, the subtractor 35 serves as a correcting means for removing the vehicle body speed component Vb owing to the driving operation of the vehicle operator from the wheel rotational speed V_w of each wheel by subtracting the inner wheel side vehicle body speed Vbi or the outer wheel side vehicle body speed Vbo computed by the vehicle body speed estimating unit 32 from the wheel rotational speed V_w before being supplied to a band pass filter 36.

The wheel rotational speed V_w processed by the subtractor 35 is forwarded to a gain circuit 37 via the band pass filter 36 which passes the frequency range of 0.5 to 5 Hz. In the illustrated embodiment, because the communication line consists of a CAN 13, and the wheel rotational speed V_w is received at an interval of 10 to 20 msec, the band pass filter 36 is provided with the property to pass the frequency range lower than 5 Hz so that the high frequency components are removed, and the frequency range of the sprung resonance band (signal frequency range corresponding to the sprung vibrations) may be obtained without fail. If the wheel rotational speed V_w is received at shorter intervals, the band pass filter 36 should be provided with a low pass property with a higher cutoff frequency such as 20 Hz so that the frequency range of the unsprung resonance band may be extracted.

The band pass filter 36 is also provided with a high pass property that allows a frequency range higher than 0.5 Hz to be passed so that the DC component may be removed from the wheel rotational speed V_w which is constantly received. Thereby, the vehicle body speed Vb (vehicle body speed component owing to the drive/brake force) caused by the driving operation of the vehicle operator can be removed from the low frequency signal lower than 5 Hz corresponding to the sprung vibrations. In other words, the band pass filter 36 serves as a wheel rotational speed variation extracting means for extracting the wheel rotational speed variation ΔV_w from the wheel rotational speed V_w . Because the band pass filter 36 allows the DC component to be removed from the wheel rotational speed V_w , it is possible to omit the subtractor 35 for subtracting the vehicle body speed Vb from the wheel rotational speed V_w .

The gain circuit 37 converts the wheel rotational speed variation ΔV_w into the unsprung load u_1 for the corresponding wheel based on a certain relationship that exists between the wheel rotational speed variation ΔV_w and the unsprung load u_1 (road contact load variation). The relationship between the wheel rotational speed variation ΔV_w and the unsprung load u_1 utilized by the gain circuit 37 is described in the following.

When the vehicle V is traveling straight ahead on a flat road at a constant speed, the road contact load of each wheel 3 is constant, and so is the wheel rotational speed V_w . The contact area of the wheel 3 deforms according to the road contact load (unsprung mass M_1 +sprung mass M_2), and the dynamic radius Rd of each wheel under a loading condition is small than that under no loading condition. When the vehicle is traveling at the speed of 80 km/h, and the road contact load changes as shown in FIG. 5B owing to the irregularities of the road surface, the corresponding change in the dynamic radius Rd of the wheel causes the wheel rotational speed to change as shown in FIG. 5A in correspondence to the road contact load. In this case, the road contact load changes at the frequency of about 1 Hz as the wheel bounces on the road at such a frequency, and this

11

causes the wheel rotational speed V_w to change at about the same frequency. The wheel rotational speed V_w and the road contact load are values actually detected by the corresponding sensors.

The detection signals from these sensors are processed by the band pass filter (of a pass frequency range of 0.5 to 2 Hz, in this case), and the graph in FIG. 6 shows the relationship between the wheel rotational speed variation ΔV_w (ordinate) and the unsprung load u_1 (abscissa). As can be seen from FIG. 6, the wheel rotational speed variation ΔV_w is substantially proportional to the unsprung load u_1 so that it can be represented by the following equation.

$$u_1 = k \Delta V_w$$

where k is a proportional constant.

Therefore, a gain circuit 37 shown in FIG. 4 computes the unsprung load u_1 of each wheel by multiplying the proportional constant k to the wheel rotational speed variation ΔV_w . In other words, the gain circuit 37 serves as a base input value computing means that computes the unsprung load u_1 (base input value of the vehicle V) from the wheel rotational speed variation ΔV_w detected by the wheel rotational speed sensor 9.

By thus performing a correction process consisting of removing the vehicle body speed V_b component from the wheel rotational speed V_w , the wheel rotational speed variation ΔV_w can be computed at a high precision without being affected by the variation in the vehicle body speed. By cutting off the frequency range corresponding to the unsprung mass vibrations by using the band pass filter 36, the detection precision of the wheel rotational speed sensor 9, the frequency of the measurement cycle and the communication speed are not required to be unduly high so that the versatility of the suspension control system can be enhanced.

(Single Wheel Model Computing Unit 33)

The unsprung load u_1 produced by the gain circuit 37 is forwarded to a single wheel model 38 included in the single wheel model computing unit 33. By inputting the unsprung load u_1 to the single wheel model 38, the single wheel model computing unit 33 computes and produces various state variables of the vehicle V such as the sprung velocity S_2 and the suspension stroke speed S_s which are used by the skyhook control unit 90. In other words, the single wheel model 38 serves as a state variable computing means that computes various state variables of the vehicle V by using the wheel rotational speed variation ΔV_w as an external input.

An example of the single wheel model 38 is described in the following. As discussed above, each wheel 3 of the vehicle V can be represented as shown in FIG. 2. In the following description and the drawings, the first order time derivative (dx/dt) and the second order time derivative (d^2x/dt^2) are denoted as given in the following.

$$dx/dt = \dot{x}, \quad d^2x/dt^2 = \ddot{x}$$

$$u = M_1 \ddot{x}_1 + M_2 \ddot{x}_2 \quad (1)$$

where M_1 is the mass of the unsprung mass, M_2 is the mass of the sprung mass, x_1 is the vertical position of the unsprung mass, x_2 is the vertical position of the sprung mass, d^2x_1/dt^2 is the vertical acceleration of the unsprung mass, and d^2x_2/dt^2 is the vertical acceleration of the sprung mass.

The mass of the unsprung mass M_1 and the mass of the sprung mass M_2 are known. Meanwhile, the input u includes, in addition to the unsprung mass load u_1 , the damping force u_2 of the damper 6 because the damper 6

12

consists of a variable damper, and the damping force u_2 can be computed from the unsprung mass load u_1 by using the single wheel model 38. Once the unsprung mass load u_1 is computed from the wheel rotational speed V_w , by using the unsprung mass load u_1 and the damping force u_2 as the input, and performing a computation based on a system matrix that takes into account the spring constant K between the sprung mass and the unsprung mass (the spring constant of the spring 5), the mass of the unsprung mass M_1 and the mass of the sprung mass M_2 , the vertical acceleration of the unsprung mass d^2x_1/dt^2 , the vertical acceleration of the sprung mass d^2x_2/dt^2 , the vertical position of the unsprung mass x_1 , the vertical position of the sprung mass x_2 . The stroke speed S_s can be represented by $(dx_2/dt - dx_1/dt)$.

More specifically, $M_1 (d^2x_1/dt^2)$, and $M_2 (d^2x_2/dt^2)$ in Equation (1) can be represented by Equations (2) and (3) given in the following.

$$M_1 \ddot{x}_1 = u_1 - K_2(x_1 - x_2) - u_2 \quad (2)$$

$$M_2 \ddot{x}_2 = K_2(x_1 - x_2) + u_2 \quad (3)$$

where u_1 is the unsprung load, u_2 is the damping force of the damper 6, and K is the spring constant.

In the single wheel model 38, the state equation or Equation (4) given below computes the state variable x given by Equation (5) from the input vector u .

$$\dot{x} = Ax + Bu \quad (4)$$

$$x = [x_1 \ x_2 \ \dot{x}_1 \ \dot{x}_2]^T \quad (5)$$

where x is the state vector, and A and B are system matrices. By using Equations (2) to (5), Equation (4) can be rewritten as given by Equation (6).

$$\dot{x} = \begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \ddot{x}_1 \\ \ddot{x}_2 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ -\frac{K_2}{M_1} & \frac{K_2}{M_1} & 0 & 0 \\ \frac{K_2}{M_2} & -\frac{K_2}{M_2} & 0 & 0 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} + \begin{bmatrix} 0 & 0 \\ 0 & 0 \\ \frac{1}{M_1} & -\frac{1}{M_1} \\ \frac{0}{M_2} & \frac{1}{M_2} \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \end{bmatrix} \quad (6)$$

In the single wheel model 38 based on this state equation, as shown in FIG. 7, the input u is forwarded to a computing unit 39 based on the system matrix B , the output of the computing unit 39 is forwarded to an integrator 41 via an adder 40, the output of the integrator 41 is forwarded to a computing unit 42 based on the system matrix A , and the output of the computing unit 42 is returned to the adder 40 as a second input. By obtaining the outputs from a first to a fourth observer matrix 43 to 46 applied to the single wheel model 38, the vertical position of the unsprung mass x_1 , the vertical position of the sprung mass x_2 , the sprung velocity S_2 (dx_2/dt) and the stroke speed S_s ($dx_2/dt - dx_1/dt$) can be obtained. The first observer matrix consists of an unsprung position observer matrix $[1, 0, 0, 0]$, the second observer matrix consists of a sprung position observer matrix $[0, 1, 0, 0]$, the third observer matrix consists of a sprung velocity observer matrix $[0, 0, 1, 0]$, and the fourth observer matrix consists of a stroke speed observer matrix $[0, 0, -1, 1]$. In other words, the first to the fourth observer matrices 43 to 46 serve as means for computing the vertical position of the unsprung mass x_1 , the vertical position of the sprung mass x_2 , the sprung velocity S_2 and the stroke speed S_s according to the wheel rotational speed variation ΔV_w in the single wheel model 38.

13

By feeding the unsprung load u_1 computed from the wheel rotational speed variation ΔV_w to the single wheel model **38** in this manner, the sprung velocity S_2 and the stroke speed S_s can be computed without regard to the caster angle that may be given to the suspension system. Because the sprung velocity S_2 and the stroke speed S_s can be computed from the unsprung load u_1 , the vehicle V is not required to be provided with a vertical G sensor or a stroke sensor so that the cost of the suspension control system can be minimized.

Referring to FIG. 4 once again, the single wheel model computing unit **33** is provided with a PID circuit **47** for feeding back the vertical position of the unsprung mass x_1 and the vertical position of the sprung mass x_2 computed from the single wheel model **38**. Thereby, the vertical position of the unsprung mass x_1 and the vertical position of the sprung mass x_2 computed by the single wheel model computing unit **33** are corrected according to the deviations between the unsprung reference position x_{10} ($=0$) and the position of the unsprung mass x_1 , and between the sprung reference position x_{20} ($=0$) and the vertical position of the sprung mass x_2 so that the vertical position of the unsprung mass x_1 and the vertical position of the sprung mass x_2 of the single wheel model **38** are allowed to converge to the reference positions (initial values) during the normal condition such as when the vehicle is traveling straight on a flat road at a constant speed.

Because the unsprung load u_1 is adjusted with reference to the reference positions, even when an input with a persistent offset is supplied to the system, it is prevented from causing significant errors in the sprung velocity S_2 and the stroke speed S_s . Also, data from other control systems may also be utilized.

Thus, the single wheel model computing unit **33** serves as a position computing means for computing the vertical position of the unsprung mass x_1 and the vertical position of the sprung mass x_2 for the given input of the unsprung mass load u_1 and the damping force u_2 by obtaining the outputs of the first observer matrix **43** and the second observer matrix **44** of the single wheel model **38**. In the illustrated embodiment, the single wheel model computing unit **33** is configured such that PID circuit **47** feeds back both of the vertical position of the unsprung mass x_1 and the vertical position of the sprung mass x_2 , but may also feed back at least one of the unsprung mass x_1 and the vertical position of the sprung mass x_2 while the unsprung mass x_1 and the vertical position of the sprung mass x_2 are appropriately corrected. The sprung velocity S_2 and the stroke speed S_s computed by the single wheel model computing unit **33** are forwarded to the skyhook control unit **90** as shown in FIG. 3.

(Four Wheel Model Computing Unit **34**)

As shown in FIG. 4, the four wheel model computing unit **34** included in the state variable computing unit **31** is provided with a pitch angular velocity computing unit **48** and a roll angular velocity computing unit **49**. The pitch angular velocity computing unit **48** receives the unsprung load u_1 produced from the gain circuit **37**. The pitch angular velocity computing unit **48** computes the acceleration/deceleration of the vehicle V (fore and aft acceleration G_x) from the unsprung load u_1 (according to the wheel rotational speed variation ΔV_w), and obtains a pitch angular speed ω_p from the computed acceleration/deceleration, the suspension property and the value of the sprung mass M_2 . The roll angular velocity computing unit **49** computes a roll angular speed ω_r from the received lateral acceleration G_y , the suspension property and the value of the sprung mass M_2 . As shown in FIG. 3, the pitch angular speed ω_p is supplied to a

14

pitch control unit **91**, and the roll angular speed ω_r is supplied to a roll control unit **92**. (Slip Determination Unit **50**)

The slip determination unit **50** receives the wheel rotational speed ΔV_w supplied by the subtractor **35**, or the deviation between the actual wheel rotational speed V_w of each wheel and the estimated vehicle body speed V_b . The slip determination unit **50** determines if the absolute value of the received wheel rotational speed variation ΔV_w (deviation) has exceeded a prescribed value, or if the deviation of the wheel rotational speed V_w detected by the wheel rotational speed sensor **9** from the vehicle body speed V_b has exceeded a prescribed value. If the deviation is greater than the prescribed value, the corresponding wheel **3** can be determined as slipping, and a slip signal SS is produced. The produced slip signal SS is forwarded to a vehicle behavior control unit (not shown in the drawings) that controls the ABS, TCS and VSA. Upon receiving the slip signal SS , the vehicle behavior control unit actuates one or more of the ABS, TCS and VSA, and an activation signal indicating the operation of any of these systems is forwarded to the input unit **21**.

<Vehicle Body Speed Estimating Unit **32**>

The vehicle body speed estimating unit **32** shown in FIG. 3 includes, as shown in FIG. 8, an accelerating/decelerating force computing unit **51** for computing the acceleration/deceleration F (F_e , F_s , F_d) of the vehicle V , a vehicle body speed computing unit **52** for computing the vehicle body speed V_b from the acceleration/deceleration computed by the accelerating/decelerating force computing unit **51**, a steering correction amount computing unit **53** for computing a correction amount (inner wheel vs vehicle body speed ratio R_{vi} and outer wheel vs vehicle body speed ratio R_{vo}) based on a steering operation, and a vehicle body speed correcting unit **54** for correcting the vehicle body speed V_b according to the correction amount computed by the steering correction amount computing unit **53**.

The accelerating/decelerating force computing unit **51** includes an accelerating force computing unit **55** for computing the drive force F_e (accelerating force), a road surface inclination decelerating force computing unit **56** for computing a decelerating force F_s of the vehicle V owing to the road surface inclination, and a decelerating force computing unit **57** for computing the decelerating force F_d of the vehicle V owing to causes other than the road surface inclination.

The accelerating force computing unit **55** computes the drive force F_e of the vehicle V owing to the output of the engine from the drive torque T_e detected by the torque sensor and the gear position P_g .

The road surface inclination decelerating force computing unit **56** computes the decelerating force F_s owing to the road inclination by subtracting the accelerating/decelerating force obtained by multiplying the fore and aft acceleration G_{xd} detected by the fore and aft G sensor by the vehicle body mass M from the accelerating/decelerating force obtained by subtracting the decelerating force F_d computed by the decelerating force computing unit **57** from the drive force F_e computed by the accelerating force computing unit **55**.

The decelerating force computing unit **57** includes a brake decelerating force computing unit **58** for computing the decelerating force of the vehicle V which increases in proportion to the brake fluid pressure P_b owing to the brake operation, a running resistance computing unit **59** for computing the running resistance which depends on the vehicle body configuration and the vehicle body speed by using the average value of the wheel rotational speed for obtaining the

15

vehicle body speed, and a feedback resistance computing unit **60** for computing the running resistance owing to the wheel rotational speed feedback. By adding the outputs of the brake decelerating force computing unit **58**, the running resistance computing unit **59** and the feedback resistance computing unit **60**, the decelerating force F_d of the vehicle V owing to factors other than the road surface inclination can be computed.

The vehicle body speed computing unit **52** computes the accelerating/decelerating force F of the vehicle body **1** by subtracting the decelerating force F_s computed by the road surface inclination decelerating force computing unit **56** and the decelerating force F_d computed by the decelerating force computing unit **57** from the drive force F_e computed by the accelerating force computing unit **55**, and obtains the acceleration by dividing the computed accelerating/decelerating force F of the vehicle V by the vehicle body mass. The computed accelerating/decelerating force F is integrated so as to provide the vehicle body speed V_b which is then forwarded to the vehicle body speed correcting unit **54**.

Referring to FIG. 9, the processes that are executed by the road surface inclination decelerating force computing unit **56** and the decelerating force computing unit **57** are described in the following. The drive torque T_e is forwarded to a multiplier **61**. The gear position P_g is forwarded to a gear position—gear ratio conversion circuit **62**. The gear position—gear ratio conversion circuit **62** produces a transmission gear ratio R_g from the gear position P_g by looking up a table, and forwards the obtained transmission gear ratio R_g to the multiplier **61**. The multiplier **61** also receives a first wheel rotational speed gain G_1 from a first wheel rotational speed gain setting circuit **63** which will be described hereinafter.

The first wheel rotational speed gain G_1 is set up according to an average wheel rotational speed V_{wav} given as an average value of the rotational speed of the wheel **3** detected by each wheel rotational speed sensor **9** in the first wheel rotational speed gain setting circuit **63**. In the illustrated embodiment, the first wheel rotational speed gain G_1 is given as zero in the region where the average wheel rotational speed V_{wav} is extremely small, and as a substantially constant value when the average wheel rotational speed V_{wav} is greater than a prescribed threshold value. The multiplier **61** multiplies the drive torque T_e , the transmission gear ratio R_g and the first wheel rotational speed gain G_1 to produce the wheel torque T_w applied to the drive wheel. The wheel torque T_w is forwarded to a torque-drive force conversion circuit **64** to be converted into a drive force F_e of the vehicle V by being divided by the dynamic load radius R_d of the tire **2**, and the output from the torque-drive force conversion circuit **64** is forwarded to a subtractor **66** as a minuend value via a gain circuit **65**.

The subtractor **66** receives, in addition to the drive force F_e supplied by the gain circuit **65**, a brake force F_b , a running resistance F_r and a feedback resistance F_{fb} which will be described hereinafter.

The brake fluid pressure P_b is forwarded to a multiplier **67** which also receives a second wheel rotational speed gain G_2 from a second wheel rotational speed gain setting circuit **68**. The second wheel rotational speed gain G_2 is set up in the second wheel rotational speed gain setting circuit **68** by looking up a look up table according to the average wheel rotational speed V_{wav} . In the illustrated embodiment, the second wheel rotational speed gain G_2 is zero when the average wheel rotational speed V_{wav} is extremely small, and is a constant value when the average wheel rotational speed V_{wav} is greater than a prescribed threshold value. The

16

brake force F_b representing the brake force produced by the brake device is computed in the multiplier **67** by multiplying the brake fluid pressure P_b to the second wheel rotational speed gain G_2 , and the brake force F_b consisting of a positive value is forwarded to the subtractor **66** as a subtrahend.

The average wheel rotational speed V_{wav} is forwarded to a running resistance setting circuit **69** which sets a running resistance F_r as a positive value depending on the vehicle speed (average wheel rotational speed V_{wav}) by looking up a look up table according to the received average wheel rotational speed V_{wav} . The running resistance F_r obtained by the running resistance setting circuit **69** is forwarded to the subtractor **66** as a subtrahend.

Furthermore, the average rear wheel rotational speed V_{wav_R} given as an average rotational speed of the rear wheel **3_R** which is a non-driven wheel is forwarded to the feedback resistance computing unit **60**. The feedback resistance computing unit **60** includes a proportional circuit **72** for setting a running resistance according to a proportional gain, an integral circuit **73** for setting a running resistance according to an integral gain and a differential circuit **74** for setting a running resistance according to a differential gain, from the deviation ΔV obtained by subtracting the average rear wheel rotational speed V_{wav_R} from the vehicle body speed V_b in a subtractor **71** in each case. The outputs of the proportional circuit **72**, the integral circuit **73** and the differential circuit **74** are added in an adder **75**, and the feedback resistance F_{fb} which is a correctional value based on the feedback of the vehicle body speed V_b is obtained. The obtained feedback resistance F_{fb} is forwarded to the subtractor **66** as a subtrahend.

In the subtractor **66**, the brake force F_b , the running resistance F_r and the feedback resistance F_{fb} as well as the deceleration force F_s owing to the road surface inclination are subtracted from the drive force F_e , and the accelerating/decelerating force F thus obtained is forwarded to an accelerating/decelerating force—acceleration/deceleration conversion circuit **76** which produces the acceleration/deceleration (fore and aft acceleration G_x) by dividing the accelerating/decelerating force F by the vehicle mass M . The acceleration/deceleration of the vehicle V is converted into the vehicle body speed by being integrated by an integrator **78**.

The vehicle body speed V_b for correcting the wheel rotational speed V_w can be obtained from the brake force F_b , the running resistance F_r , the feedback resistance F_{fb} and the decelerating force F_s in this manner.

Referring to FIG. 8 once again, the steering correction amount computing unit **53** includes a cornering radius computing unit **79** for computing the cornering radius TR of the vehicle V according to the wheel rotational speeds V_w and the yaw rate γ and an inner and outer wheel vehicle body speed ratio computing unit **80** for computing the cornering state variable serving as a correction value (the inner wheel vehicle body speed ratio R_{vi} and the outer wheel vehicle body speed ratio R_{vo} which are given as ratios of the speeds of the part of the vehicle body corresponding to the inner wheel and the outer wheel, respectively, to the vehicle body speed V_b) according to the tread T of the vehicle V and the computed cornering radius TR .

The process that is executed in the steering correction amount computing unit **53** is described in the following with reference to FIG. 10. The average wheel rotational speed V_{wav} obtained from the wheel rotational speeds V_w detected by the corresponding wheel rotational speed sensors **9** is forwarded to a divider **81** as the numerator. The divider **81** receives the yaw rate γ detected by the yaw rate

17

sensor 11 as the denominator so that the cornering radius TR of the vehicle V can be obtained by dividing the average wheel rotational speed V_{wav} by the yaw rate γ . When the denominator or the yaw rate γ happens to be zero, the denominator is replaced by a suitable number such as a constant value. The computed cornering radius TR is forwarded to the subtractor 83 (as the minuend) and the adder 85. The subtractor 83 and the adder 85 compute the inner wheel cornering radius Tri and the outer wheel cornering radius Tro by subtracting and adding one half of the tread T stored in memory 82 from and to the received cornering radius TR, respectively. The outputs of the subtractor 83 and the adder 85 are forwarded to dividers 84 and 86, respectively, as numerators. The dividers 84 and 86 receive the cornering radius TR of the vehicle V computed by the divider 81 so that the inner wheel vehicle body speed ratio R_{vi} and the outer wheel vehicle body speed ratio R_{vo} are computed by dividing the inner wheel cornering radius Tri and the outer wheel cornering radius Tro by the cornering radius TR of the vehicle V, respectively.

The inner wheel vehicle body speed ratio R_{vi} and the outer wheel vehicle body speed ratio R_{vo} computed by the dividers 84 and 86 are forwarded to the vehicle body speed correcting unit 54 where the inner wheel side vehicle body speed V_{bi} (or the vehicle body speed of the part corresponding to the inner wheel) and the outer wheel side vehicle body speed V_{bo} (or the vehicle body speed of the part corresponding to the outer wheel) are computed by multiplying the vehicle body speed V_b by the inner wheel side vehicle body speed V_{bi} and the outer wheel side vehicle body speed V_{bo} , respectively. In other words, the vehicle body speed correcting unit 54 serves as a correcting means for correcting the vehicle body speed V_b according to the inner wheel vehicle body speed ratio R_{vi} and the outer wheel vehicle body speed ratio R_{vo} .

By thus correcting the vehicle body speed V_b according to the cornering condition of the vehicle V, the vehicle body speeds V_b (V_{bi} and V_{bo}) on the inner and outer wheel sides that can change depending on the steering operation of the vehicle operator can be accurately computed.

As shown in FIG. 4, the inner wheel side vehicle body speed V_{bi} and the outer wheel side vehicle body speed V_{bo} are forwarded to the state variable computing unit 31 or more specifically to the subtractor 35 provided on the input side of the band pass filter 36 as the subtrahend to be used for computing the wheel rotational speed variation ΔV_w from each wheel rotational speed V_w and canceling the wheel rotational speed variation component owing to the vehicle body speed variation component and the difference in the cornering radius between the inner wheel and outer wheel.

Because the influences of the brake/drive force of the vehicle V from the wheel rotational speeds V_w are canceled by subtracting the inner wheel side vehicle body speed V_{bi} or the outer wheel side vehicle body speed V_{bo} from each wheel rotational speed V_w in the state variable computing unit 31, the state variables of the vehicle V (such as the sprung velocity S_2 and the stroke speed S_s) can be computed at a high precision. Because the vehicle body speed correcting unit 54 corrects the vehicle body speed V_b according to the inner wheel vehicle body speed ratio R_{vi} and the outer wheel vehicle body speed ratio R_{vo} , the vehicle body speed V_b can be computed at a high precision by taking into account the vehicle body speeds at the different wheel positions so that the state variables of the vehicle V can be computed at a high precision owing to the elimination of the

18

influences of the cornering movement of the vehicle V on the wheel rotational speeds V_w .

FIG. 11A is a time chart in which the sprung velocity detected by the sensor and the sprung velocity S_2 computed by the state variable computing unit 31 are indicated by broken line and solid line, respectively, and FIG. 11B is a time chart in which the stroke speed detected by the sensor and the stroke speed S_s computed by the state variable computing unit 31 are indicated by broken line and solid line, respectively. As shown in FIG. 11, the computed stroke speed S_s and the sprung velocity S_2 substantially agree with the corresponding detected values, and it can be seen that the state variable computing unit 31 can compute the stroke speed S_s and the sprung velocity S_2 at a high precision. In the illustrated embodiment, because the unsprung load u_1 is computed from the wheel rotational speeds V_w , and is used as the input to the vehicle model, the stroke speed S_s and the sprung velocity S_2 can be computed without regard to the caster angle that may be provided in the geometry of the suspension system 7.

<Control Target Current Setting Unit 23>

As shown in FIG. 3, the control target current setting unit 23 includes a skyhook control unit 90 for performing a skyhook control and setting a skyhook control target current A_{sh} , a pitch control unit 91 for performing a pitch control based on a pitch angular velocity ω_p and setting a pitch control target current A_p , a roll control unit 92 for performing a roll control based on a roll angular velocity ω_r and setting a roll control target current A_r , a steering angle proportional control unit 93 for setting a steering angle proportional control target current A_{sa} , an unsprung damping control unit 95 for performing an unsprung damping control means of the vehicle V and setting an unsprung damping control target current A_u , and a minimum target current control unit 96 for setting a minimum target current A_{min} for generating a minimum damping force depending on the vehicle speed.

The skyhook control unit 90 performs a ride quality control (vibration control) for reducing the vibration of the vehicle as the vehicle travels over a rough road surface and improving the ride quality of the vehicle V. The pitch control unit 91 performs a vehicle body attitude control for stabilizing the attitude of the vehicle body 1 by controlling the pitching motion of the vehicle body 1 at the time of a sudden acceleration or deceleration of the vehicle V. The roll control unit 92 performs a vehicle body attitude control for stabilizing the attitude of the vehicle body 1 by controlling the rolling motion of the vehicle body 1 at the time a cornering of the vehicle V. The unsprung damping control unit 95 controls the resonant vibration of the unsprung mass so that the road grip of the wheels 3 and the ride quality may be improved.

<Skyhook Control Unit 90>

The process executed in the skyhook control unit 90 is described in the following with reference to FIGS. 12 and 13. The skyhook control unit 90 forwards the sprung velocity S_2 computed by the state variable computing unit 31 shown in FIG. 3 to a damping force base value computing unit 97. The damping force base value computing unit 97 sets a damping force base value D_{sb} according to the received sprung velocity S_2 by looking up a sprung velocity—damping force map. The damping force base value D_{sb} that is set is forwarded to a gain circuit 98 which multiplies the damping force base value D_{sb} by a skyhook gain G_{sh} to provide a skyhook target damping force D_{sht} . The computed skyhook target damping force D_{sht} is forwarded to a target current setting circuit 99 which also receive the stroke speed

19

Ss. The target current setting circuit 99 sets and produces the skyhook control target current A_{sh} for each damper 6 according to the skyhook target damping force D_{sh} and the stroke speed Ss by looking up the current map shown in FIG. 13.

<Unsprung Damping Control Unit 95>

The unsprung damping control unit 95 shown in FIG. 3 is described in the following with reference to FIGS. 14 to 17. As shown in FIG. 14, in the unsprung damping control unit 95, each received wheel rotational speed Vw is forwarded to a band pass filter 101 which has a band pass property for 8 to 18 Hz to allow the wheel rotational speed Vw signal of the unsprung resonance frequency range to pass through. Therefore, the band pass filter 101 extracts signals of a higher frequency range than that of the band pass filter 36 (FIG. 4) for the skyhook control which has a pass frequency range of 0.5 to 5 Hz. The cut frequency in the high frequency range of the band pass filter 36 for the skyhook control is 5 Hz, and the cut frequency in the low frequency range of the band pass filter 101 for the unsprung damping control means is 8 Hz so that a band gap is created between the two band pass filters 36 and 101, and the mutual interferences between the skyhook control and the unsprung mass vibration control can be avoided.

The wheel rotational speed signals Vw received from the CAN 13 may contain signals of frequencies other than those within the unsprung resonance frequency ranges. For instance, the wheel rotational speed signal Vw having the frequency property shown in FIG. 15A and obtained when the vehicle was traveling at 40 km/h contains the components belonging to the unsprung resonance frequency range which is shown in FIG. 15B. Therefore, the wheel rotational speed signal Vw is passed through the band pass filter 101 corresponding to the unsprung resonance frequency range so that the unsprung resonance frequency component is extracted from the wheel rotational speed signal Vw, and the DC component is removed from the wheel rotational speed signal Vw. In other words, the band pass filter 101 serves as a wheel rotational speed variation extracting means for extracting the wheel rotational speed variation ΔVw from the wheel rotational speed signal Vw.

The wheel rotational speed variation ΔVw that has passed through the band pass filter 101 is forwarded to an absolute value computing circuit 102 to be converted into the absolute value of the wheel rotational speed variation ΔVw . The wheel rotational speed variation ΔVw is proportional to the unsprung load u_1 , and the vertical acceleration of the unsprung mass obtained by dividing the unsprung load u_1 by the unsprung mass M_1 also corresponds to the wheel rotational speed variation ΔVw . Thus, the unsprung vibration can be controlled by producing a damping force that corresponds to the absolute value of the vertical acceleration.

The absolute value of the wheel rotational speed variation ΔVw produced from the absolute value computing circuit 102 is multiplied by a gain in the gain circuit 103 to provide the absolute value of the unsprung acceleration Gz_1 which is the basic input value of the vehicle V. More specifically, the gain obtained by dividing the proportional constant k discussed earlier in conjunction with FIG. 6 by the unsprung mass M_1 is multiplied to the absolute value of the wheel rotational speed variation ΔVw .

The unsprung acceleration Gz_1 produced from the gain circuit 103 is forwarded to a target current setting circuit 104 which computes a current corresponding to the unsprung acceleration Gz_1 . The unsprung damping control target current A_u is determined by performing a peak hold/ramp down control on the computed current.

20

The target current setting circuit 104 determines the unsprung damping control target current A_u as indicated by the solid line in FIG. 16B according to the computed current as indicated by the broken line in FIG. 16B for the given input of the unsprung acceleration Gz_1 having the property as shown in FIG. 16A. More specifically, the target current setting circuit 104 holds the maximum value of the received computed current as the unsprung damping control target current A_u for a prescribed time period, and upon elapsing of the prescribed time period, decreases (or ramps down) the value of the unsprung damping control target current A_u at a prescribed rate. In other words, when the unsprung acceleration Gz_1 is on the increase, the value of the unsprung damping control target current A_u is selected so as to quickly respond to the unsprung acceleration Gz_1 . When the unsprung acceleration Gz_1 is on the decrease, the value of the unsprung damping control target current A_u is selected so as to respond comparatively slowly to the unsprung acceleration Gz_1 . As a result, the unsprung vibration is caused to damp out more rapidly as compared to the case where the unsprung damping control target current A_u is selected as indicated by the broken line.

Referring to FIG. 14 once again, the unsprung damping control target current A_u produced from the target current setting circuit 104 is forwarded to a limiting circuit 105. The limiting circuit 105 limits the upper limit of the unsprung damping control target current A_u to an upper limit value A_{umax} , and produces the limited unsprung damping control target current A_u . In other words, the limiting circuit 105 sets the upper limit value A_{umax} to the damping control target current A_u when the received unsprung damping control target current A_u exceeds the upper limit value A_{umax} . Thereby, the unsprung damping control target current A_u which is set according to the magnitude of the wheel speed variation ΔVw is prevented from exceeding the upper limit value A_{umax} which is determined by taking into account the power supply capacity of the vehicle V and the damping property of the damper 6.

The wheel speed variation ΔVw produced from the absolute value computing circuit 102 is supplied not only to the gain circuit 103 but also to a low-pass filter 106. The low-pass filter 106 has the low pass property to pass the frequency range of 1 Hz or lower. An upper limit setting circuit 107 sets the upper limit value A_{umax} according to the absolute value of the wheel speed variation ΔVw passed through the low-pass filter 106, and forwards the upper limit value A_{umax} to the limiting circuit 105. Specifically, the upper limit setting circuit 107 sets the upper limit value A_{umax} such that the upper limit value A_{umax} becomes smaller as the wheel speed variation ΔVw increases when the absolute value of the wheel speed variation ΔVw is greater than a predetermined value.

The limiting circuit 105 changes the upper limit of the unsprung damping control means target current A_u in accordance with the upper limit value A_{umax} that is received. More specifically, the upper limit A_{umax} is made smaller with the increase in the absolute value of the wheel speed variation ΔVw that has passed through the low-pass filter 106. The significance of this point is discussed in the following.

When the vehicle is traveling over a relatively smooth paved road, the wheel speed variation ΔVw (absolute value) after being processed by the low-pass filter 106 indicated by the solid line in FIG. 17A is smaller than the wheel speed variation ΔVw before being processed by the low-pass filter 106 indicated by the thin line, and this is also true with the average values. In contrast, when the vehicle is traveling

21

over a rough road surface, as shown in FIG. 17B, the absolute value of the wheel rotational speed variation ΔV_w is great. Therefore, the limiting circuit 105 reduces the unsprung damping control target current A_u (weakens the unsprung damping control) so that the unsprung damping control target current A_u is reduced, and the impairment of the ride quality can be avoided.

Thus, the unsprung damping control unit 95 can be configured such that the unsprung damping control target current A_u is set in dependence on the wheel rotational speed V_w signal. Thereby, the unsprung damping control target current A_u is determined in dependence on the magnitude of the unsprung resonance range component of the wheel speed variation ΔV_w , and the unsprung damping control can be performed without the intervention of external factors such as the influences from the sprung mass.

<Current Holding Unit 24>

Referring to FIG. 3 once again, the current holding unit 24 produces a current holding signal S_{fix} when a signal indicating that any of the VSA, ABS and TCS is in operation is received by the input unit 21, indicating that the behavior of the vehicle V is unstable. The produced current holding signal S_{fix} is forwarded to the damper control unit 25.

<Damper Control Unit 25>

The damper control unit 25 includes a high current selection unit 108 and a current control unit 109. The high current selection unit 108 sets the greatest of the values of the skyhook control target current A_{sh} , the pitch control target current A_p , the roll control target current A_r , the steering angle proportional control target current A_{sa} , the unsprung damping control target current A_u and the minimum target current A_{min} as the target current A_{tgt} .

The current control unit 109 receives the target current A_{tgt} and the current holding signal S_{fix} . The current control unit 109 controls the damping force of the damper 6 by generating a drive current to each damper 6 based on the target current A_{tgt} set by the high current selection unit 108 when the current holding signal S_{fix} is not received. On the other hand, when the current holding signal S_{fix} is received, the current control unit 109 holds the electric current (or holds the damping coefficient of each damper 6 to a predetermined value) based on the value of the target current A_{tgt} immediately before the current holding signal S_{fix} is received to prevent the damping force of the damper 6 from changing abruptly, and controls the damping force of the damper 6 by generating the drive current for the damper 6 based upon the fixed target current A_{tgt} .

The current control unit 109 maintains the target current A_{tgt} to a fixed value during the time the current holding signal S_{fix} is being received. The target current A_{tgt} may also continue to be fixed to the constant value for a prescribed period of time following the loss of the current holding signal S_{fix} .

<<Damping Force Control Process>>

The ECU 8 having the structure discussed above performs the damping force control according to the basic procedure described in the following. When the vehicle V starts traveling, the ECU 8 executes the damping force control according to the procedure shown in the flowchart of FIG. 18 at a prescribed processing interval (10 ms, for instance). Upon starting the damping force control, the ECU 8 computes the unsprung load u_1 on the basis of various detection values such as the detection value of each wheel rotational speed sensor 9, and the state variables (the sprung velocity S_2 and the stroke speed S_s of each wheel, and the roll angular velocity ω_r , and the pitch angular velocity ω_p of the vehicle

22

body 1) of the vehicle V from the computed unsprung load u_1 , and the detection signal of the lateral G sensor 10 (step ST1).

Then, the ECU 8 computes the skyhook control target current A_{sh} of each damper 6 based on the sprung velocity S_2 and the stroke speed S_s (step ST2), computes the target current A_p for each damper 6 from the pitch angular velocity ω_p of the vehicle body 1 (step ST3), computes the roll control target current A_r from the roll angular velocity ω_r of the vehicle body 1 (step ST4), computes the steering proportional control target current A_{sa} for each damper from the steering angle δf (step ST5), computes the unsprung damping control target current A_u for each damper 6 from the wheel rotational speed V_w of the corresponding wheel (step ST6), and computes the minimum target current A_{min} for each damper 6 from the wheel rotational speed V_w of the corresponding wheel (step ST7). The processing in steps ST2 to ST7 is not required to be performed in this order, and may also be performed simultaneously.

Then, the ECU 8 sets the target current A_{tgt} to the largest of the values of the six control target current A_{sh} , A_p , A_r , A_{sa} , A_u and A_{min} for each wheel (step ST8). The ECUS determines if the current holding signal S_{fix} is being received (step ST9). If this determination result is No (or if none of the VSA, ABS and TCS is in operation), the drive current based on the target current A_{tgt} that was selected in step ST8 is forwarded to the MLV coil of the corresponding damper 6 (step ST10). As a result, an optimum target damping force corresponding to the load of the damper 6 is selected in the damping force control so that a favorable driving stability and an improved ride quality can be achieved.

On the other hand, if the determination result in step ST9 is Yes (or if at least one of the VSA, ABS and TCS is in operation), the ECU 8 supplies the drive current based on the target current A_{tgt} that was selected in the previous control cycle to the MLV coil of the corresponding damper 6 (step ST11). As a result, if any of the VSA, ABS and TCS is in operation, the target current A_{tgt} that was selected in step ST8 is prevented from making a sudden change so that the vehicle behavior is prevented from becoming unstable.

Second Embodiment

A second embodiment of the suspension control device according to the present invention is described in the following with reference to FIG. 19. In the following description, the parts corresponding to those of the first embodiment are denoted with like numerals without necessarily repeating the description of such parts.

<<ECU 8>>

In this embodiment, as shown in FIG. 19, the input unit 21 of the ECUS receives, in addition the wheel speed V_w , the lateral acceleration G_y , the drive torque T_e , the gear position P_g , the brake fluid pressure P_b , the yaw rate γ , the steering angle δf , and the VSA, ABS and TCS flags that appeared in the first embodiment, a fore and aft acceleration G_x from the fore and aft G sensor provided on the vehicle body 1 but not shown in the drawings.

The vehicle state variable estimating unit 22 includes a state variable computing unit 31 and a vehicle body speed estimating unit 32, and the vehicle body speed estimating unit 32 includes an accelerating/decelerating force computing unit 51 and a steering correction amount computing unit 53 (although not shown in the drawings) similarly as the first embodiment. Meanwhile, the state variable computing unit 31 is not provided with a four wheel model computing unit

23

34, and is provided only with four single wheel model computing units 33 and a slip determination unit 50. The sprung velocity S_2 and the stroke speed S_s computed by the vehicle state variable estimating unit 22 are used to compute the skyhook control target current A_{sh} in the skyhook control unit 90, similarly as in the first embodiment.

The pitch control unit 91 of the present embodiment sets the pitch control target current A_p by using the differential value of the fore and aft acceleration G_x detected by the fore and aft G sensor. The roll control unit 92 sets the roll control target current A_r by using the differential value of the lateral acceleration G_y detected by the lateral G sensor 10. The unsprung damping control unit 95 sets the unsprung target damping control current A_u based on the wheel rotational speed V_w of each wheel similarly as in the first embodiment.

Further, in this embodiment, a current limit unit 124 is provided, instead of the current holding unit 24 of the first embodiment. The signal indicating the operation of the ABS, TCS and VSA is not forwarded to the input unit 21, and the current limit unit 124 receives the slip signal SS directly from the slip determination unit 50. The slip signal SS is also forwarded to a vehicle behavior control unit (not shown in the drawings) that controls the ABS, TCS and VSA so that the vehicle behavior control unit performs the control of the ABS, TCS and VSA in response to an input of the slip signal SS . Meanwhile, if the slip signal is received, based on the assumption that the behavior of the vehicle V is unstable, the current limit unit 124 produces a suppression signal S_d to suppress the control target current in a prescribed manner.

The damper control unit 25 of this embodiment includes a target current correcting unit 110 and a high current selection/control unit 111, instead of the high current selection unit 108 and the current control unit 109 of the first embodiment. The skyhook control target current A_{sh} , the unsprung damping control target current A_u , the pitch control target current A_p , the steering angle proportional control target current A_{sa} , the roll control target current A_r and the minimum target current A_{min} are forwarded to the high current selection/control unit 111 via the target current correcting unit 110.

The target current correcting unit 110 additionally receives a limit signal S_d from a current limit unit 124. Upon receiving the limit signal S_d , the target current correcting unit 110 limits or corrects the skyhook control target current A_{sh} and the unsprung target damping control current A_u by fixing the values thereof at their values immediately preceding the reception of the limit signal S_d , respectively (or by fixing the damping coefficient of the damper 6 at a prescribed value).

The high current selection/control unit 111 sets the target current $Atgt$ to the greatest of the six control target currents A_{sh} , A_p , A_r , A_{sa} , A_u and A_{min} produced from the target current correcting unit 110 for each wheel, and controls the damping force of the damper 6 by producing the drive current for the corresponding damper 6 according to the set target current $Atgt$. By thus causing the high current selection/control unit 111 to select the skyhook control target current A_{sh} and the unsprung target damping control current A_u that are corrected by the target current correcting unit 110, the skyhook control target current A_{sh} and the unsprung target damping control current A_u which could be selected on the basis of the wheel rotational speed V_w of the wheel under a slip condition are prevented from abruptly changing the damping force of the corresponding damper 6.

In the illustrated embodiment, because the target current correcting unit 110 corrects only the skyhook control target current A_{sh} and the unsprung target damping control current

24

A_u , but does not correct the unsprung damping control target current A_u , the pitch control target current A_p , the steering angle proportional control target current A_{sa} , the roll control target current A_r or the minimum target current A_{min} , even when the vehicle behavior is disturbed, for instance by a rolling movement, an appropriate roll control target current A_r is produced so as to minimize the influences of the disturbance, and the controlling performance of the VSA or the like can be improved.

As a variation of the target current correcting unit 110, upon receiving the limit signal S_d , the target current correcting unit 110 may limit the skyhook control target current A_{sh} and the unsprung target damping control current A_u at fixed values, and multiply an attenuation gain to each of the steering angle proportional control target current A_{sa} , the roll control target current A_r or the minimum target current A_{min} for restricting the control action. By so doing, the control amount of each damper may be reduced as a whole when the vehicle behavior tends to be unstable.

Alternatively, upon receiving the limit signal S_d , the target current correcting unit 110 may limit the skyhook control target current A_{sh} and the unsprung target damping control current A_u to fixed values, and hold the pitch control target current A_p , the steering angle proportional control target current A_{sa} , the roll control target current A_r and the minimum target current A_{min} at the values thereof immediately preceding the reception of the limit signal S_d , respectively (or by holding the damping coefficient of the damper 6 at a prescribed value). By so doing, the control amount of each damper may be reduced in a reliable manner when the vehicle behavior tends to be unstable.

In any of these cases, similarly as in the first embodiment, the time period (time duration) in which the current control unit 109 keeps or limits each of the control target currents at a fixed value can be made to coincide with the duration of receiving the limit signal S_d or until a short time period has elapsed following the loss of the limit signal S_d .

The current control unit 109 not only may maintain each control target current at (limit each control target current to) a fixed value for a prescribed time period, but also may initially gradually reduce each control target current, and then fix the control target current at a fixed level, or may initially fix the control target current at a fixed level and then gradually reduce the control target current. Thus, each control target current may be limited under the control of the control target current setting unit 23 in various manners. By causing the control amount to converge to a fixed level after elapsing of a prescribed time period, the vehicle behavior may be favorably stabilized.

<<Damping Force Control Process>>

The damping force control process executed by the ECU 8 according to the second embodiment of the present invention is described in the following with reference to FIG. 20.

Upon starting of the damping force control process, the ECU 8 computes the unsprung load u_1 for each wheel according to the detection value of the corresponding wheel rotational speed sensor 9, and computes the dynamic state variables of the vehicle V (such as the sprung mass velocity S_2 and the stroke speed S_s of each wheel) according to the computed unsprung load u_1 (step ST21).

The ECU 8 then computes the skyhook control target current A_{sh} for each damper 6 according to the sprung mass velocity S_2 and the stroke speed S_s (step ST22), computes the pitch control target current A_p of each damper 6 according to the differential value of the fore and aft acceleration G_x (step ST23), computes the roll control target current A_r for each damper 6 according to the differential value of the

25

lateral acceleration G_y (step ST24), computes the steering angle proportional control target current Asa for each damper 6 according to the steering angle δf (step ST25), computes the unsprung damping control target current Au for each damper 6 according to the wheel rotational speed Vw of the corresponding wheel (step ST26), and computes the minimum target current $Amin$ for each damper 6 according to the wheel rotational speed Vw of the corresponding wheel (step ST27). These steps ST22 to ST27 are not necessarily required to be performed in this order, and may also be performed simultaneously.

The ECU 8 determines if the limit signal Sd is being received (step ST28). If the determination result is No (or if no slip condition is determined), the ECU 8 sets the greatest of the six control target currents Ash , Ap , Ar , Asa , Au and $Amin$ which were set for each wheel in steps ST21 to ST27, and forwards a corresponding drive current to the MLV coil of the corresponding damper according to the target current $Atgt$ (step ST30). As a result, the damping force control allows the optimal target damping force to be set for the given load of the damper 6, and both the driving stability and the ride quality can be improved.

On the other hand, if the determination result is Yes in step ST29 (or a slip condition is determined), the skyhook control target current Ash and the unsprung target damping control current Au are corrected (limited) depending on the previous values (step ST29), the greatest of the six control target currents Ash , Ap , Ar , Asa , Au and $Amin$ is set as the target current $Atgt$ for each wheel, and the drive current is forwarded to the MLV coil of the corresponding damper 6 according to the target current $Atgt$ (step ST30). As a result, when the vehicle V is under a slip condition, and at least one of the VSA, ABS and TCS are in operation, sudden changes in the skyhook control target current Ash and the unsprung target damping control current Au are prevented from causing a sudden change in the target current $Atgt$ of each damper, and a resulting destabilization of the behavior of the vehicle.

Third Embodiment

A third embodiment of the suspension control system according to the present invention is described in the following with reference to FIGS. 21 to 25. In the following description, the parts corresponding to those of the first embodiment are denoted with like numerals without necessarily repeating the description of such parts.

Referring to FIG. 21, in the third embodiment, the suspension system 7_R for the rear wheels 3_R consists of a trailing arm suspension system using a trailing arm 204 for connecting each rear wheel 3_R to the vehicle body 1. Alternatively, each rear wheel 3_R may be connected to the vehicle body 1 via the corresponding trailing arm part of a torsion beam suspension system. As shown in FIG. 22, the front end of the trailing arm 204 is pivotally connected to the vehicle body 1, and the rear end of the trailing arm 204 rotatably supports the rear wheel 3_R. Therefore, as the stroke of the damper 6 changes owing to the input from the road surface or the like, the rear wheel 3_R swings along an arc centered around the front end of the trailing arm 204 so that the rear wheel 3_R moves not only vertically but also in the fore and aft direction. The fore and aft movement of the rear wheel 3_R contributes to the wheel rotational speed variation ΔVw , and may impair the precision in the values that may be computed from the wheel rotational speed variation ΔVw .

Based on this recognition, in this embodiment, while the unsprung load u_1 of the front wheel 3_F is computed from the

26

detection value of the wheel rotational speed sensor 9_F similarly as in the previous embodiments, and the sprung velocity S_2 and the stroke speed Ss are computed from the unsprung load u_1 , a different process is used from computing the sprung velocity S_2 and the stroke speed Ss of each rear wheel as will be described hereinafter.

The sprung velocity S_2 and the stroke speed Ss for each rear wheel are computed without using the wheel rotational speeds Vw of the rear wheels 3_R, but each rear wheel 3_R, is fitted with a wheel rotational speed sensor 9 because the computation of the average wheel rotational speed Vw_{av} , the unsprung damping control performed by the unsprung damping control unit 95, the setting of the minimum target current $Amin$ performed by the minimum target current control unit 96, and the control units for the ABS, the TCS and the VSA require the wheel rotational speeds Vw of the rear wheels 3_R.

As shown in FIG. 23, the ECU 8 includes a front wheel state variable computing unit 231 for the front wheels 3_F, instead of the state variable computing unit 31, and includes a rear wheel state variable computing unit 232 for the rear wheels 3_R. The vehicle state variable estimating unit 22 includes four wheel model computing units 34 in addition to the front wheel state variable computing unit 231 and the rear wheel state variable computing unit 232. The front wheel state variable computing unit 231 includes a pair of single wheel model computing units 33 for the two front wheels 3_F, and the rear wheel state variable computing unit 232 includes a pair of single wheel models 235 for the two rear wheels 3_R. The single wheel model computing units 33 for the front wheels, and the corresponding single wheel models 38 are no different from those of the first embodiment illustrated in FIGS. 4 and 7, and are therefore not described in any detail here.

As shown in FIG. 24, the rear wheel state variable computing unit 232 computes the sprung velocity S_2 and the stroke speed Ss of each rear wheel 3_R mainly from the computed result of the front wheel state variable computing unit 231, instead of the wheel rotational speed Vw of the rear wheel 3_R. In computing the sprung velocity S_2 and the stroke speed Ss of each rear wheel 3_R, the rear wheel state variable computing unit 232 requires the vehicle body speed as will be discussed hereinafter, and the vehicle body speed is based on the average value of the wheel rotational speeds of the four wheels 3, instead of the vehicle body speed Vb computed by the vehicle body speed estimating unit 32. Therefore, the wheel rotational speeds Vw are forwarded to the rear wheel state variable computing unit 232. The details of the rear wheel state variable computing unit 232 are discussed in the following.

As shown in FIG. 24, the rear wheel state variable computing unit 232 includes a front wheel road surface position estimating unit 233, a delay processing unit 234 and a rear wheel road surface input single wheel model 235 for each rear wheel. The front wheel road surface position estimating unit 233 receives the unsprung load u_{1F} and the unsprung position x_{1F} of the corresponding front wheel 3_F computed by the rear wheel state variable computing unit 232.

Based on these values, the front wheel road surface position estimating unit 233 computes the road surface vertical position x_{0F} of the front wheel 3_F. In other words, the front wheel 3_F can be schematically represented as shown in FIG. 25, and the input load u_{1F} of the front wheel 3_F can be expressed by Equation (7) given in the following.

$$u_{1F} = Kt(x_{0F} - x_{1F}) \quad (7)$$

27

where K_t is the modulus of longitudinal elasticity of the tire 2_F . Following Equation (8) can be obtained from Equation (7).

$$x_{0F} = (u_{1F}/K_t) - x_{1F} \quad (8)$$

Thus, the road surface vertical position x_{0F} of the front wheel 3_F can be obtained from the unsprung load u_{1F} and the unsprung position x_{1F} of the corresponding front wheel 3_F that are forwarded thereto, and the modulus of longitudinal elasticity of the tire 2_F that is stored in memory.

The road surface vertical position x_{0F} of the front wheel 3_F provided by the front wheel road surface position estimating unit 233 is forwarded to the delay processing unit 234 which also receives the wheel rotational speeds V_w of the wheels 3 detected by the wheel rotational speed sensors 9 . The delay processing unit 234 computes the average value of the wheel rotational speeds V_w to provide the speed of the vehicle body 1 , and computes the time required for the road surface vertical position x_{0F} of the front wheel 3_F to be transferred to the road surface of the rear wheel 3_R as a time delay T_d by dividing the wheelbase WB stored in memory 236 by the speed of the vehicle body 1 . By delaying the road surface vertical position x_{0F} by this time delay T_d (by adding the time delay T_d), the delay processing unit 234 converts the road surface vertical position x_{0F} of the front wheel 3_F into the road surface vertical position x_{0R} of the rear wheel 3_R . Thereby, the road surface vertical position x_{0R} of the rear wheel 3_R can be computed at a high precision.

The road surface vertical position x_{0R} of the rear wheel 3_R is forwarded to the rear wheel road surface input single wheel model 235 . Similarly as the single wheel model 38 of the front wheel state variable computing unit 231 , using the road surface vertical position x_{0R} as the input, the rear wheel road surface input single wheel model 235 computes and produces the sprung velocity S_2 of the rear wheel 3_R and the stroke speed S_s of the suspension system 7_R from an observer matrix applied to a system matrix modeling a state equation. In other words, the rear wheel road surface input single wheel model 235 serves as a rear wheel state variable computing means for computing a state variable of the vehicle related to the rear wheel 3_R from the computation result of the front wheel state variable computing unit 231 . In this manner, the state variables of the vehicle related to the rear wheel 3_R can be obtained at a high precision according to the road surface vertical position x_{0F} of the front wheel 3_F .

The sprung velocity S_2 of the rear wheel 3_R and the stroke speed S_s of the suspension system 7_R produced from the rear wheel road surface input single wheel model 235 are forwarded to the skyhook control unit 90 as shown in FIG. 23, and used for the computation of the skyhook target damping force D_{sht} of the rear wheel 3_R .

As discussed above, the state variables of the vehicle such as the sprung velocity S_2 of the rear wheel 3_R and the stroke speed S_s of the suspension system 7_R can be computed by making use of the computation result of the front wheel state variable computing unit 231 which is in turn based on the detection result of the wheel rotational speed sensor 9_F of the front wheel 3_F . Therefore, even when each rear wheel is supported on the vehicle body via a trailing arm 204 , the state variables of the vehicle related to the rear wheel 3_R can be obtained at a high precision.

The speed of the vehicle body 1 is computed by the front wheel road surface position estimating unit 233 as the average value of the wheel rotational speeds V_w of the wheels 3 in the illustrated embodiment, but may also be based on other values, such as the inner wheel side wheel

28

rotational speed and the outer wheel side wheel rotational speed corrected at the subtractor 35 (FIG. 4) by the inner wheel vs vehicle body speed ratio R_{vi} and outer wheel vs vehicle body speed ratio R_{vo} produced by the vehicle body speed estimating unit 32 (FIG. 23). When the wheel rotational speeds V_w of the rear wheels 3_R are not used by the unsprung damping control means or the ABS, the wheel rotational speed sensor 9_R provided on each rear wheel 3_R may be omitted.

The present invention was described in terms of specific embodiments, but the present invention is not limited by the illustrated embodiments, and can be changed in various parts thereof. For instance, the positions and arrangements of the various members and components, and the specific modes of control can be freely modified without departing from the spirit of the present invention. The various components included in the foregoing embodiments are not entirely essential to the invention, but may be selectively omitted without departing from the spirit of the present invention.

LIST OF NUMERALS

- V vehicle
- 3 wheel
- 6 damper (variable damper)
- 8 ECU
- 9 wheel rotational speed sensor
- 20 suspension control system
- 23 control target current setting unit (damper control means)
- 25 damper control unit (damper control means)
- 31 state variable computing unit (state variable computing means)
- 32 vehicle body speed estimating unit (vehicle body speed estimating means)
- 33 single wheel model computing unit
- 35 subtractor (wheel rotational speed sensor correcting means)
- 36 band pass filter (first filter, wheel rotational speed variation extracting means)
- 37 gain circuit (base input value computing unit)
- 38 single wheel model (vehicle model)
- 45 third observer matrix (sprung velocity computing means)
- 46 fourth observer matrix (stroke speed computing means)
- 51 accelerating/decelerating force computing unit (drive/brake force computing means)
- 52 vehicle body speed computing unit (vehicle body speed computing means)
- 53 steering correction amount computing unit (cornering state variable computing means)
- 90 skyhook control unit (sprung control unit)
- 95 unsprung damping control unit
- 101 band pass filter (second filter)
- 231 front wheel state variable computing unit (front wheel state variable computing means)
- 232 rear wheel state variable computing unit (rear wheel state variable computing means)
- F acceleration/deceleration (drive/brake force)
- F_e drive force (acceleration)
- F_b brake force
- F_s deceleration owing to downward inclination
- F_r traveling resistance
- G_x fore and aft acceleration (vehicle body acceleration)
- R_{vi} inner wheel vs vehicle body speed ratio (cornering state variable)
- R_{vo} outer wheel vs vehicle body speed ratio (cornering state variable)

29

Vw wheel rotational speed (input signal)
 ΔVw wheel rotational speed variation
 Vb vehicle body speed
 Vbi inner wheel side vehicle body speed
 Vbo outer wheel side vehicle body speed
 Vwav average wheel rotational speed
 u, unsprung load (base input value))
 S2 sprung velocity (state variable)
 Ss stroke speed (state variable)
 x_o road surface vertical position

The invention claimed is:

1. A suspension control system for a vehicle provided with a variable damper that can adjust a damping force according to an input signal, comprising:

a wheel rotational speed sensor for detecting a wheel rotational speed;

an un-sprung load computing means for computing an un-sprung load of the vehicle according to a wheel rotational speed variation detected by the wheel rotational speed sensor, the un-sprung load consisting of a road contact load variation of the vehicle;

a state variable computing means for computing state variables of the vehicle by feeding the un-sprung load to a vehicle model representing a behavior of a sprung mass and an un-sprung mass of the vehicle in relation to the un-sprung load, the state variables including a sprung velocity and a suspension stroke speed of the vehicle; and

a damper control means for controlling the damping force of the variable damper according to the computed state variables,

wherein the un-sprung load computing means converts the wheel rotational speed variation into the un-sprung load based on a relationship between the wheel rotational speed variation and the un-sprung load, the relationship being predetermined based on actually detected values of the wheel rotational speed and a road contact load.

2. The suspension control system according to claim 1, further comprising a first filter for the wheel rotational speed sensor for a first frequency range corresponding to a vibration of the sprung mass, and a second filter for the wheel rotational speed sensor for a second frequency range higher than the first frequency range,

wherein the damper control means includes a sprung damping control means for controlling the damping force of the variable damper according to the wheel rotational speed variation filtered by the first filter, and an unsprung damping control means for controlling the damping force of the variable damper according to the wheel rotational speed variation filtered by the second filter.

3. The suspension control system according to claim 1, further comprising a vehicle body speed estimating means for estimating a vehicle body speed according to a vehicle body acceleration of the vehicle, and a wheel rotational speed correcting means for computing a corrected wheel rotational speed by subtracting an estimated wheel rotational speed estimated from the vehicle body speed from a detected value of the wheel rotational speed sensor,

wherein the un-sprung load computing means is configured to compute the un-sprung load of the vehicle according to a wheel rotational speed variation of the corrected wheel rotational speed.

4. The suspension control system according to claim 3, wherein the vehicle body speed estimating means estimates

30

the vehicle body acceleration of the vehicle according to a drive/brake force of the vehicle and an inclination of a road surface.

5. The suspension control system according to claim 4, wherein the vehicle body speed estimating means estimates a traveling resistance of the vehicle according to the detected wheel rotational speed, and estimates the vehicle body acceleration of the vehicle by taking into account the estimated traveling resistance.

6. The suspension control system according to claim 3, further comprising a filter for a frequency range corresponding to a vibration of the sprung mass, the filter filtering the corrected wheel rotational speed so as to remove variation due to the vehicle body acceleration to thereby extract a corrected wheel rotational speed in the frequency range corresponding to the vibration of the sprung mass, wherein the un-sprung load computing means is configured to compute the un-sprung load of the vehicle according to a wheel rotational speed variation of the corrected wheel rotational speed extracted by the filter.

7. The suspension control system according to claim 1, further comprising a cornering state variable computing means for computing a cornering state variable and a wheel rotational speed correcting means for correcting a detected value of the wheel rotational speed sensor according to the computed cornering state variable,

wherein the un-sprung load computing means computes the un-sprung load of the vehicle according to a wheel rotational speed variation of the corrected wheel rotational speed.

8. The suspension control system according to claim 1, further comprising

a wheel rotational speed variation extracting means for extracting a wheel rotational speed variation of a frequency range corresponding to a sprung vibration of the vehicle according to the detected wheel rotational speed, such that the un-sprung load computing means computes the un-sprung load according to the wheel rotational speed variation extracted by the wheel rotational speed variation extracting means.

9. The suspension control system according to claim 1, wherein

the wheel rotational speed sensor is provided on a front wheel, and the un-sprung load computing means computes the un-sprung load with respect to the front wheel,

the state variable computing means including a front wheel state variable computing means for computing the state variables of the vehicle associated with the front wheel, and a rear wheel state variable computing means for computing the state variables of the vehicle associated with a rear wheel according to the state variables computed by the front wheel state variable computing means.

10. The suspension control system according to claim 9, wherein the un-sprung load computing means computes the un-sprung load associated with the front wheel, and the state variables computed by the front wheel state variable computing means include an unsprung position associated with the front wheel,

the rear wheel state variable computing means being configured to compute a road surface vertical position associated with the front wheel according to the unsprung load associated with the front wheel and the un-sprung position associated with the front wheel, and compute the state variables of the vehicle associated

31

with fit the rear wheel according to the computed road surface vertical position associated with the front wheel.

11. The suspension control system according to claim **10**, wherein the rear wheel state variable computing means is 5 configured to compute a road surface vertical position associated with the rear wheel by applying a time delay corresponding to a vehicle speed to the road surface vertical position associated with the front wheel, and compute the state variables of the vehicle associated with the rear wheel 10 according to the road surface vertical position of the vehicle associated with the rear wheel.

* * * * *

32