

FLO-TROL® MODEL CD900 CONSTANT FLOW CONTROL VALVES

Flo-Trol® automatic flow control valves are **designed to give constant flow over wide pressure ranges**. The valve design has no moving parts; rather a self-cleaning flexible orifice that varies in size with applied pressure so that a constant flow rate is maintained. Flow rates are maintained to within $\pm 15\%$ between 15 and 125 psi (1 to 8.6 bar).

NON CORROSIVE

The all Stainless Steel body allows this valve to resist corrosion for a longer service life

SELF CLEANING

The valve design has no moving parts; rather a self-cleaning flexible orifice (Buna-N) that varies in size with applied pressure so that a constant flow rate is maintained

LEAD FREE
NSF/ANSI 61



- Booster Pump Systems and Domestic Water Systems
- NSF/ANSI 61 & 372 Certified - Unleaded Lead Free
- Stainless Steel Construction (not chrome or Nickel-plated brass)
- Laser engraved with size, flow rates, and an arrow indicating the direction of flow. Packaged in clear plastic bags with color-coded labels for easy identification and coded date

FLO-TROL® APPLICATIONS

- Flow Regulator Applications
- Water Well Pumps
- Ground Water Heat Pumps
- Fan Coils
- Water Softeners
- Drinking Fountains
- Water Filters
- Irrigation systems
- Cooling Towers
- Water Purifiers
- Eye Washes
- Fire Sprinkler Systems
- Filling Equipment
- Dispensing Machines
- Tank-Less Heaters
- UV Filters



FLOMATIC® VALVES

High Quality Valves Built To Last...



FLO-TROL® AVAILABLE MODELS



Model CDA 3/8"

Configuration: 3/8" F X 3/8" F
Material: All Stainless Steel

GPM'S: 0.19, 0.25, 0.5, 0.75, 1

Dole® Cross Reference - GA



Model CDB 1/2"

Configuration: 1/2" F X 1/2" F
Material: All Stainless Steel

GPM'S: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 6

Dole® Cross Reference - GB



Model CDC 3/4"

Configuration: 3/4" F X 3/4" F
Material: All Stainless Steel

GPM'S: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 6, 7, 8, 9, 10, 11.5

Dole® Cross Reference - Model GC



Model CDY 3/4"

Configuration: 3/4" M X 3/4" F
Material: All Stainless Steel

GPM'S: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 6, 7, 8, 9, 10, 11.5

Dole® Cross Reference - Model GY



Model CDX 1"

Configuration: 1" F X 1" F
Material: All Stainless Steel

GPM'S: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 6, 7, 8, 9, 10, 12, 15, 17, 20, 25, 30

Dole® Cross Reference - Model GX



Model CDP 1 1/4"

Configuration: 1 1/4" M X 1 1/4" M
Material: All Stainless Steel

GPM'S: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 6, 7, 8, 9, 10, 12, 15, 17, 20, 25, 30

Dole® Cross Reference - Model GP



Model CDT 1 1/2"

Configuration: 1 1/2" M X 1 1/2" M
Material: All Stainless Steel

GPM'S: 9, 10, 12, 15, 17, 20, 25, 30

Dole® Cross Reference - Model GT



Model CDF 2"

Configuration: 2" M X 2" M
Material: All Stainless Steel

GPM'S: 9, 10, 12, 15, 17, 20, 25, 30

Dole® Cross Reference - Model GF



Model CDH 2 1/2"

Configuration: 2 1/2" M X 2 1/2" M
Material: All Stainless Steel

GPM'S: 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90

Dole® Cross Reference - Model GH



Model CDK 3"


Configuration: 3" M X 3" M
Material: All Stainless Steel

GPM'S: 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 105, 110, 115, 120


Dole® Cross Reference - Model GK

MODEL CD900 SPECIFICATIONS

FLO-TROL® OPERATION



Flo-Trol® Under Low Pressure



Flo-Trol® Under High Pressure

DATA (See chart: Max Differential Pressure 125 PSI)



PRESSURE MAX - 200 PSI



TEMP MAX - 180°F



SIZES - 3/8" - 3"



FLOW RANGES - 0.19 thru 120 GPM


MATERIALS

VALVE BODY: 304 Stainless Steel

VALVE ORIFICE: Buna-N Rubber NSF/ANSI 61 Certified

RETAINING RING: Celcon M90

FLO-TROL® REGULATION (Typical Flow Curve)

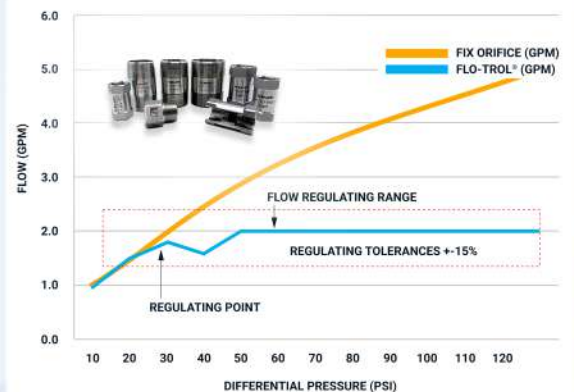

NOTE: "Dole" is a registered trademark of Siebe, Inc. of Foxboro, Massachusetts.



WWW.FLOMATIC.COM

15 Pruy'n's Island, Glens Falls NY 12801 | 518-761-9357

Danco, Inc. - EX2009, Page 002
Fluidmaster, Inc. v. Danco, Inc. - IPR2024-0063