US 20030063034A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2003/0063034 A1

Taniguchi et al. (43) Pub. Date: Apr. 3, 2003

(54) RADIO GUIDANCE ANTENNA, DATA COMMUNICATION METHOD, AND NON-CONTACT DATA COMMUNICATION APPARATUS

(76) Inventors: **Michiaki Taniguchi**, Kyoto (JP); **Toshiya Kitagawa**, Kyoto (JP)

Correspondence Address:
DICKSTEIN SHAPIRO MORIN & OSHINSKY LLP
2101 L STREET NW
WASHINGTON, DC 20037-1526 (US)

(21) Appl. No.: **10/254,835**

(22) Filed: **Sep. 26, 2002**

(30) **Foreign Application Priority Data**

Sep. 28, 2001 (JP) JP301,401/2001


Publication Classification

(51) **Int. Cl.**[7] **H01Q 1/38**; H01Q 11/12; H01Q 21/00

(52) **U.S. Cl.** ..... **343/700 MS**; 343/742; 343/867

(57) **ABSTRACT**

A radio guidance antenna in which the sum of mutual inductances of antennas is minimized. The radio guidance antenna includes a first antenna which is divided into upper and lower half regions by antenna conductors, and a second antenna which is composed of an antenna conductor and formed on the same plane as or a plane parallel to a plane of the first antenna. The second antenna is not connected to the first antenna at any points where it intersects the first antenna, but rather is inductively coupled to the upper and lower halves of the first antenna through mutual inductance regions. The first antenna is supplied with electric power from a first feeding point, and the second antenna is supplied with electric power from a second feeding point. The invention also includes a data communication method and a non-contact data communication apparatus which make use of the radio guidance antenna.

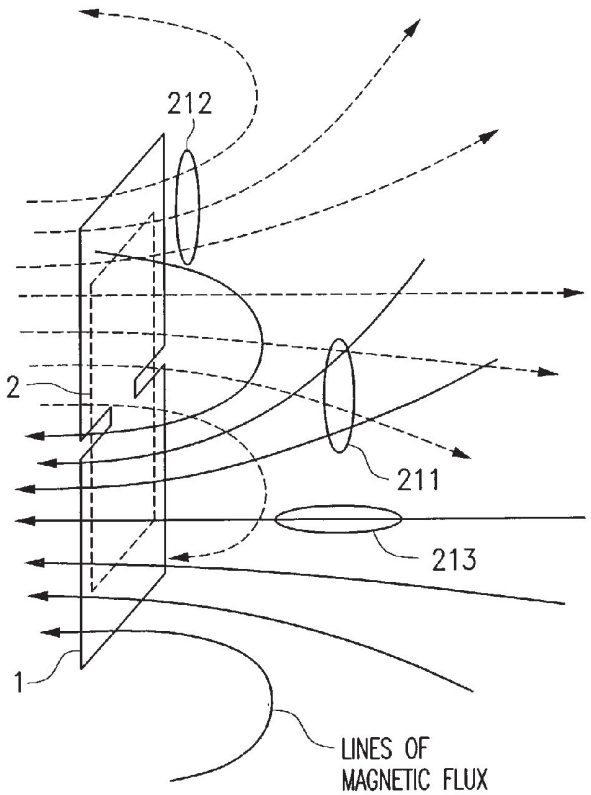

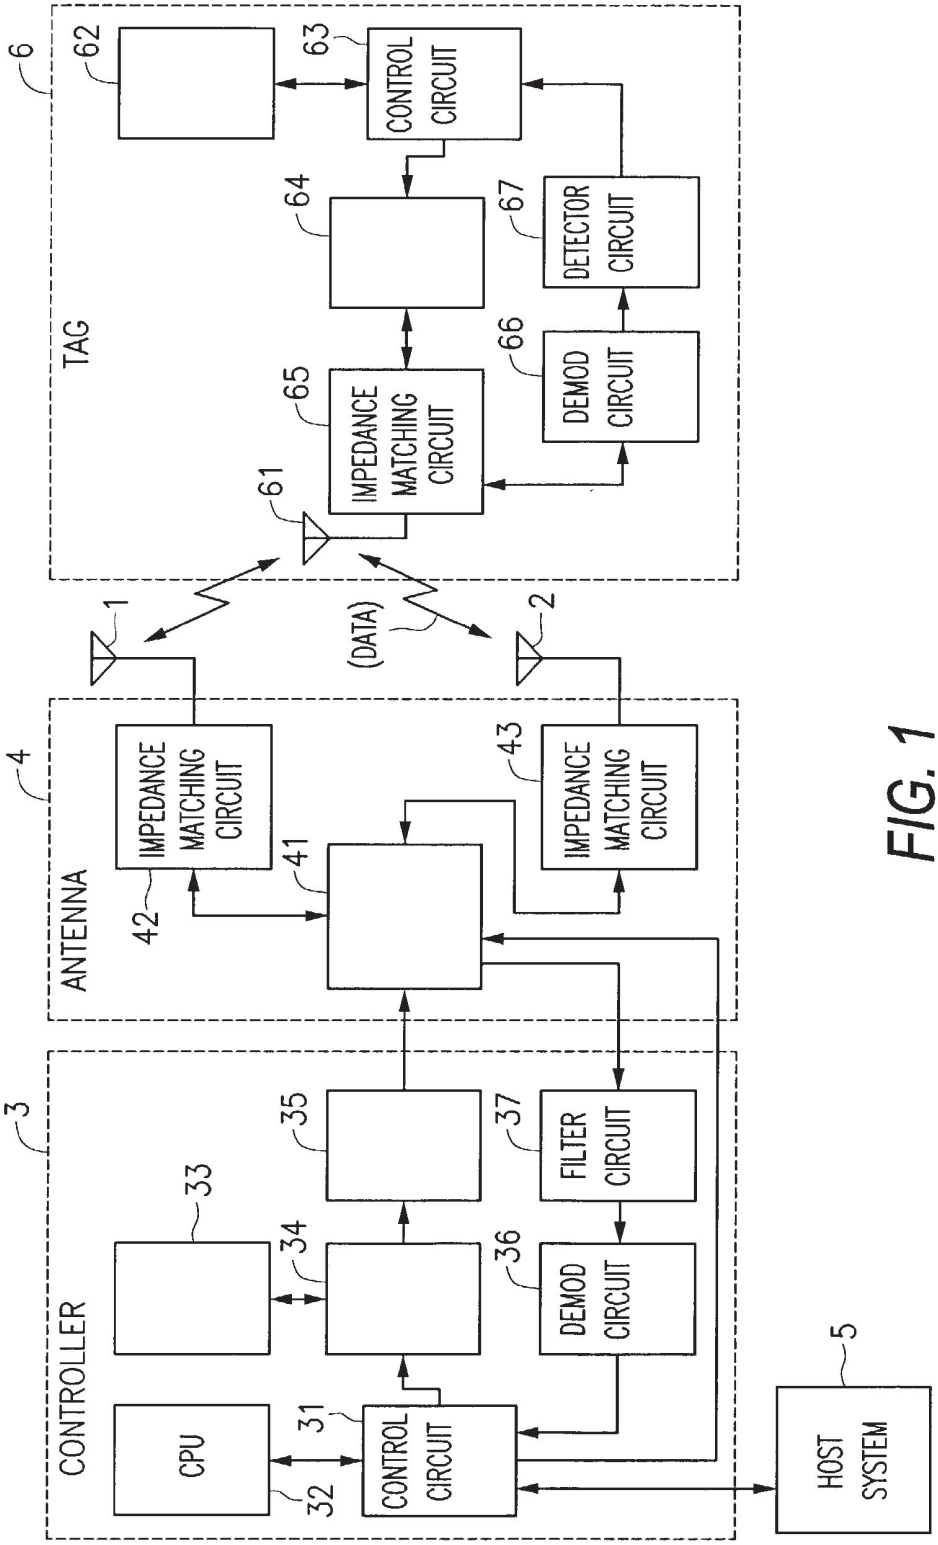

TAG
6
62
63
CONTROL CIRCUIT
64
67
DETECTOR CIRCUIT
65
IMPEDANCE MATCHING CIRCUIT
66
DEMOD CIRCUIT
61
1
(DATA)
2
ANTENNA
4
IMPEDANCE MATCHING CIRCUIT
43
IMPEDANCE MATCHING CIRCUIT
42
41
CONTROLLER
3
35
37
FILTER CIRCUIT
33
34
36
DEMOD CIRCUIT
CPU
31
CONTROL CIRCUIT
32
5
HOST SYSTEM

FIG. 1

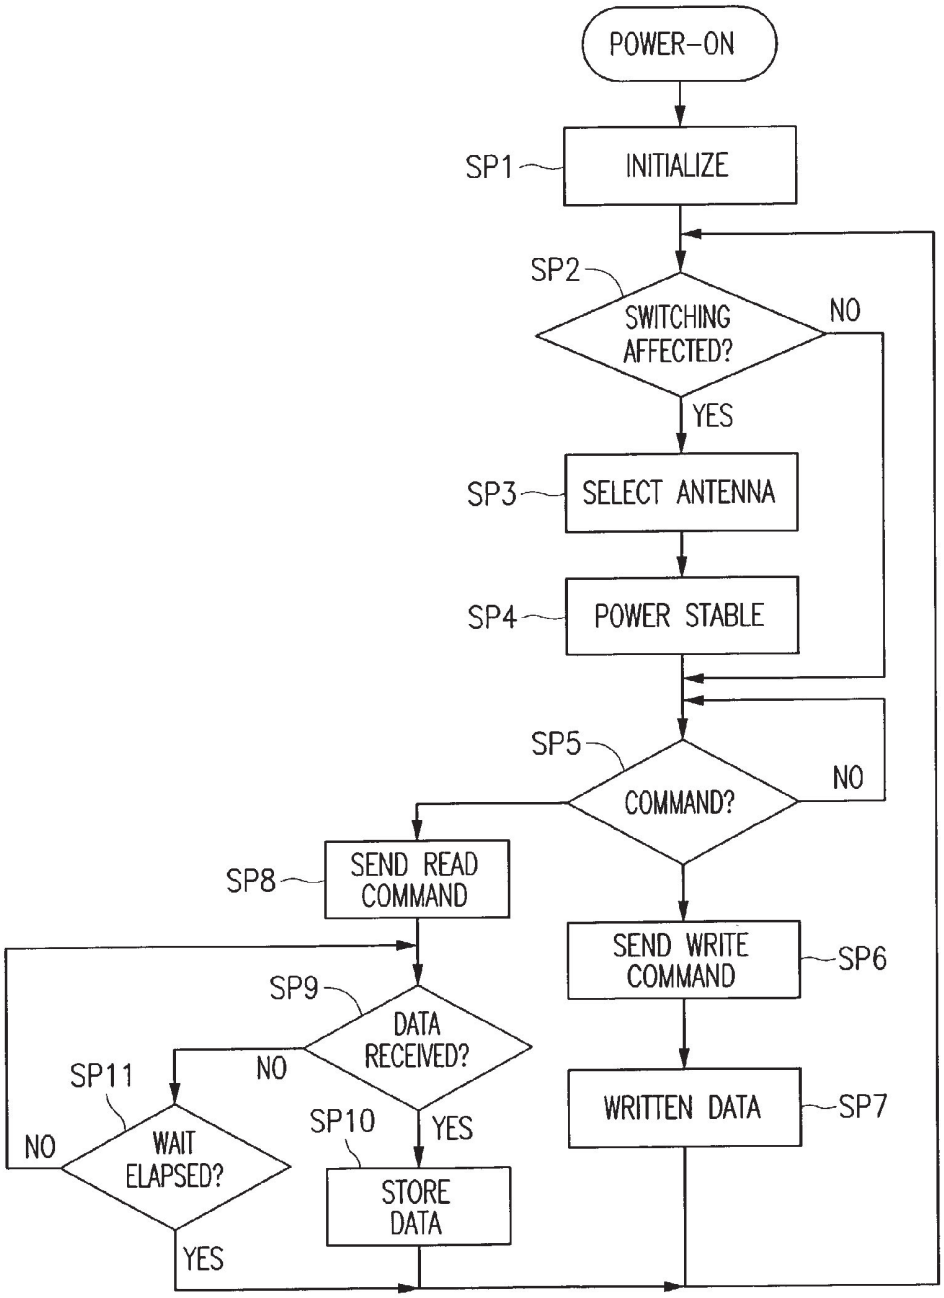

POWER-ON
SP1
INITIALIZE
SP2
SWITCHING AFFECTED?
NO
YES
SP3
SELECT ANTENNA
SP4
POWER STABLE
SP5
COMMAND?
NO
SP8
SEND READ COMMAND
SEND WRITE COMMAND
SP6
SP9
DATA RECEIVED?
NO
SP11
WAIT ELAPSED?
NO
SP10
YES
STORE DATA
WRITTEN DATA
SP7
YES

FIG. 2

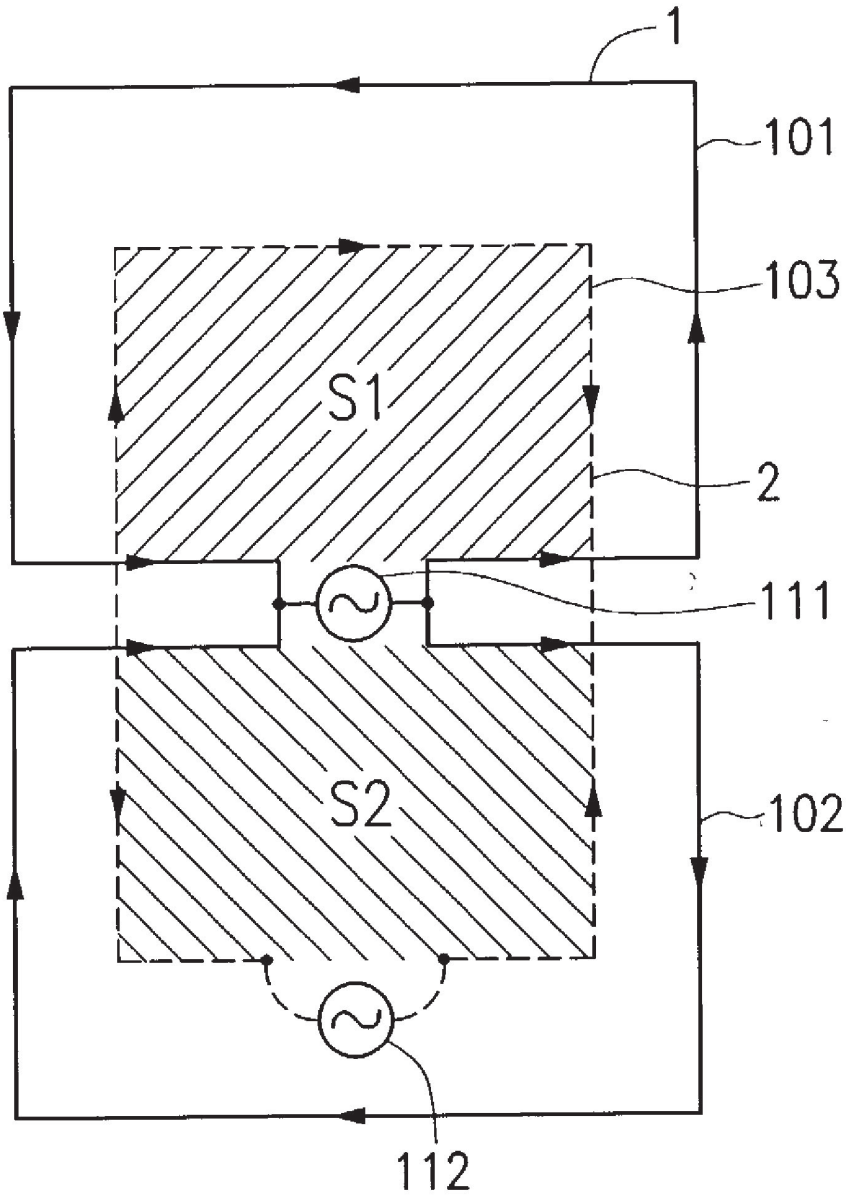


FIG. 3

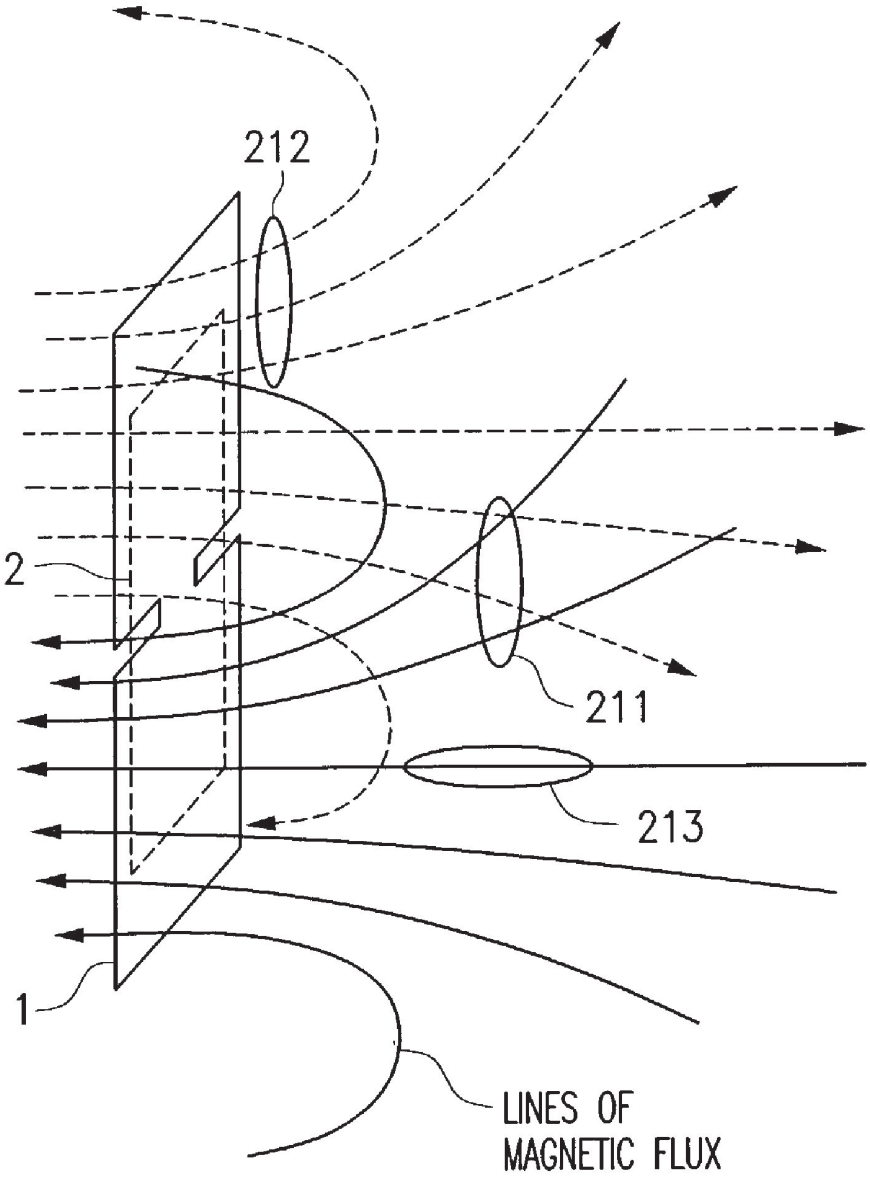


FIG. 4

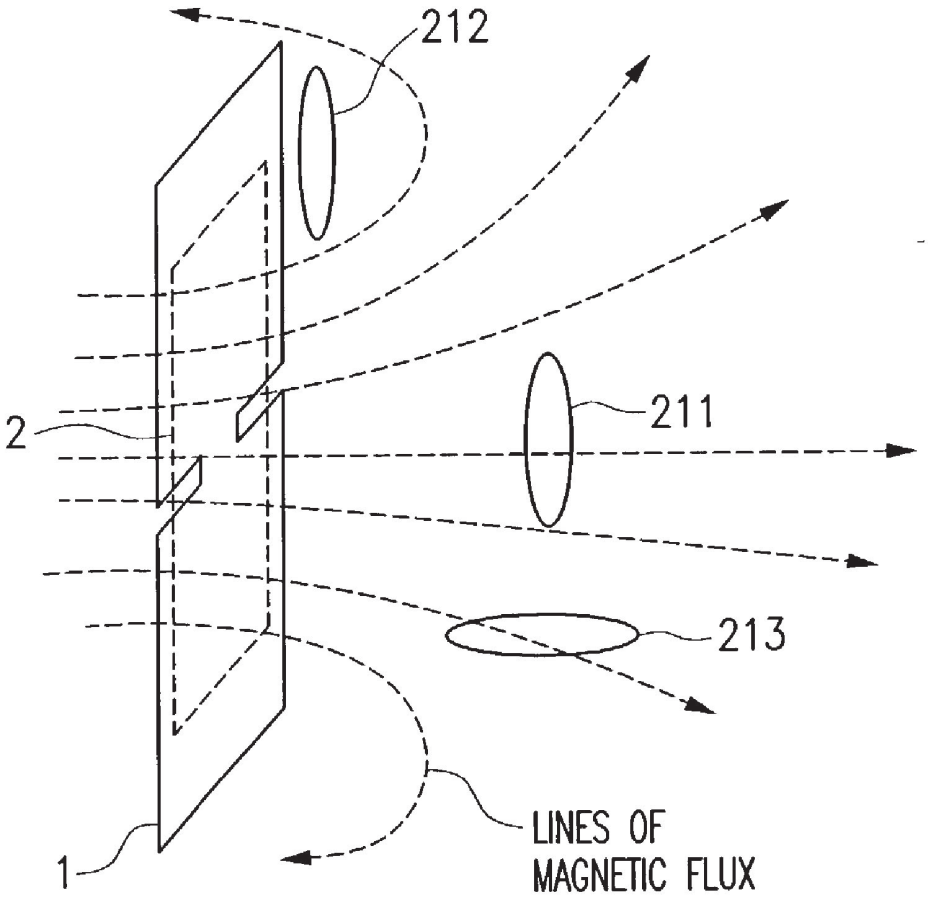


FIG. 5

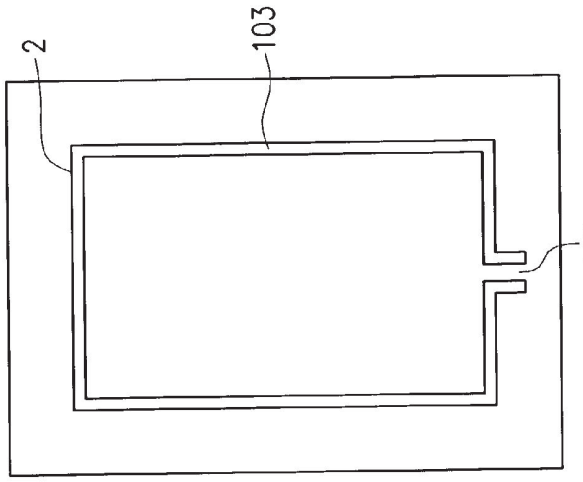


FIG. 6E



FIG. 6D



FIG. 6A

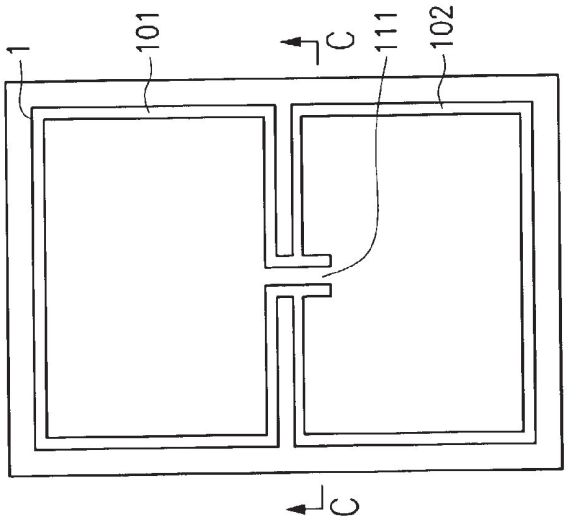


FIG. 6B



FIG. 6C



FIG. 7A

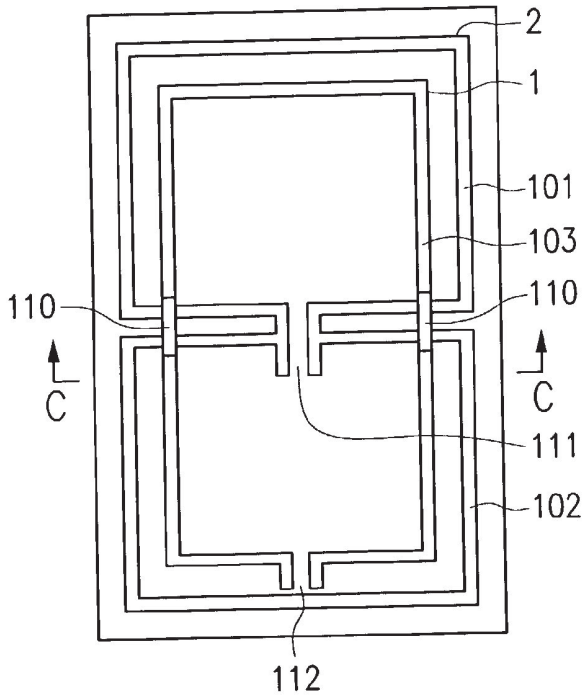


FIG. 7B




FIG. 7D




FIG. 7C

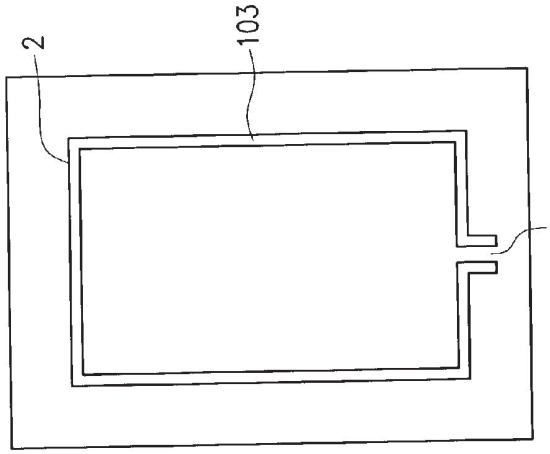


FIG. 8E

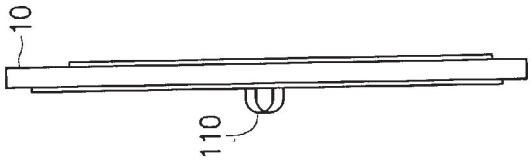


FIG. 8D



FIG. 8A

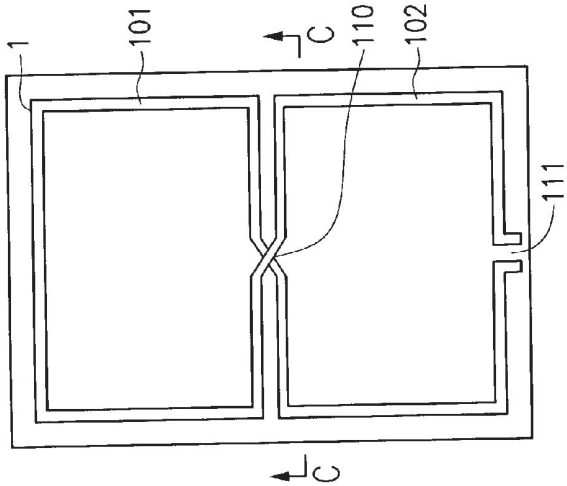


FIG. 8B



FIG. 8C

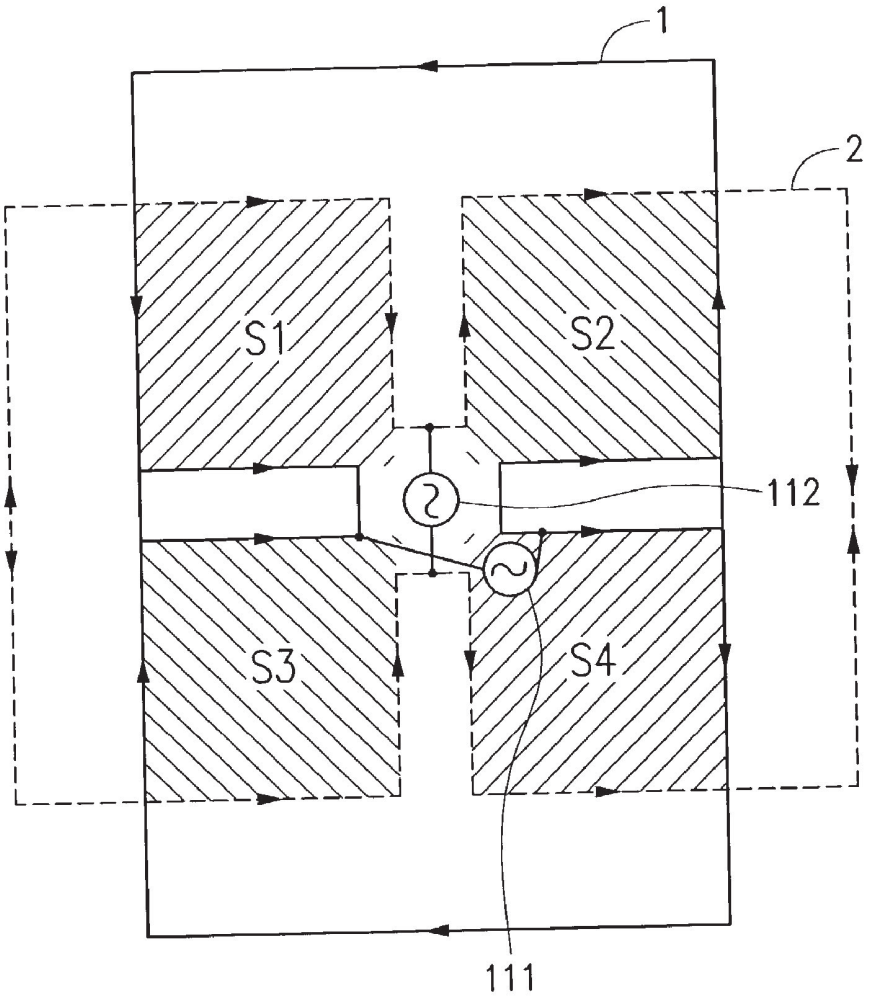


FIG. 9

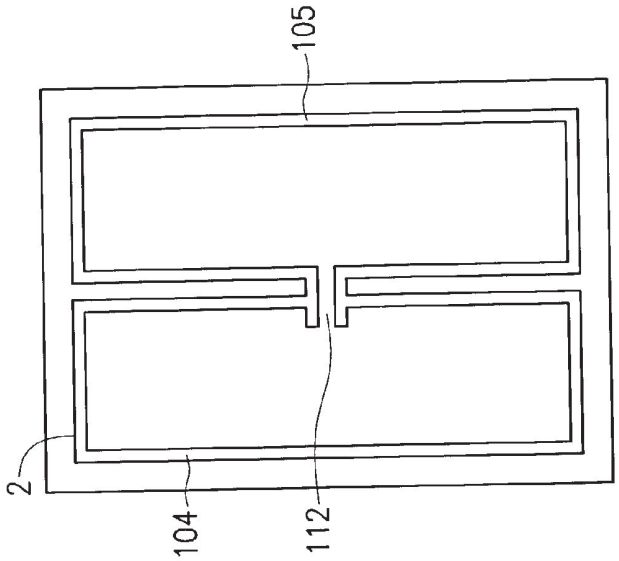


FIG. 10E



FIG. 10D



FIG. 10A

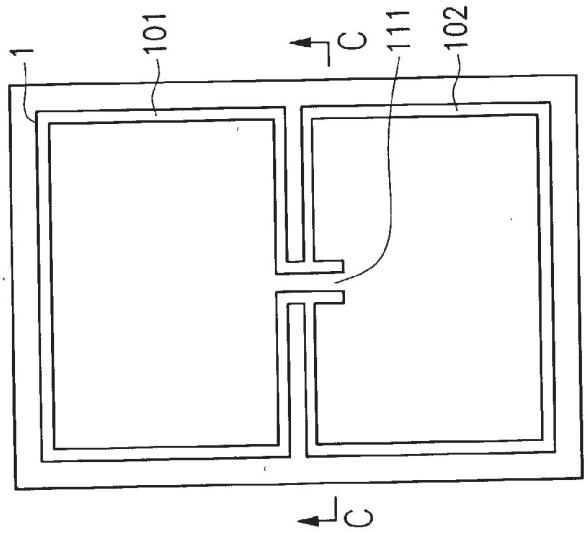


FIG. 10B



FIG. 10C

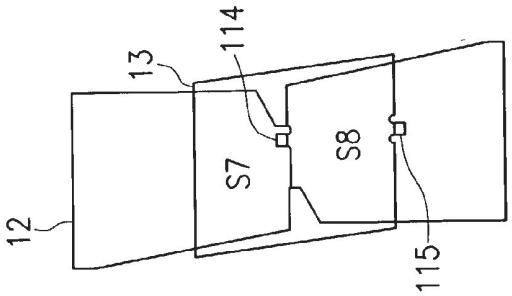


FIG. 11D

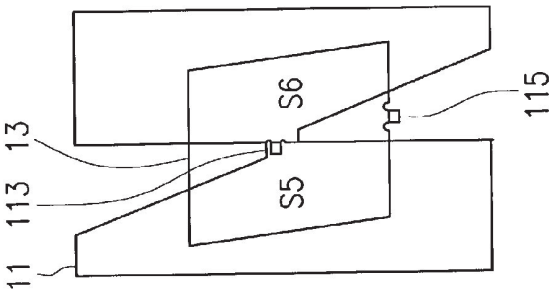


FIG. 11C

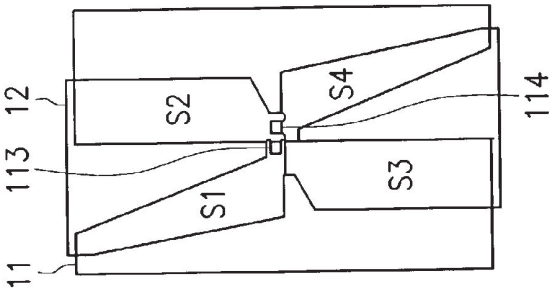


FIG. 11B

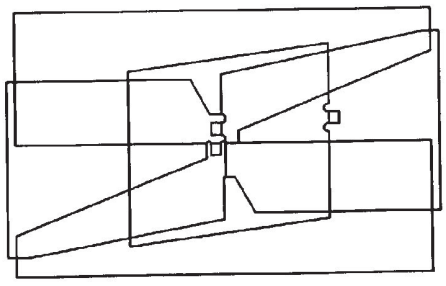


FIG. 11A

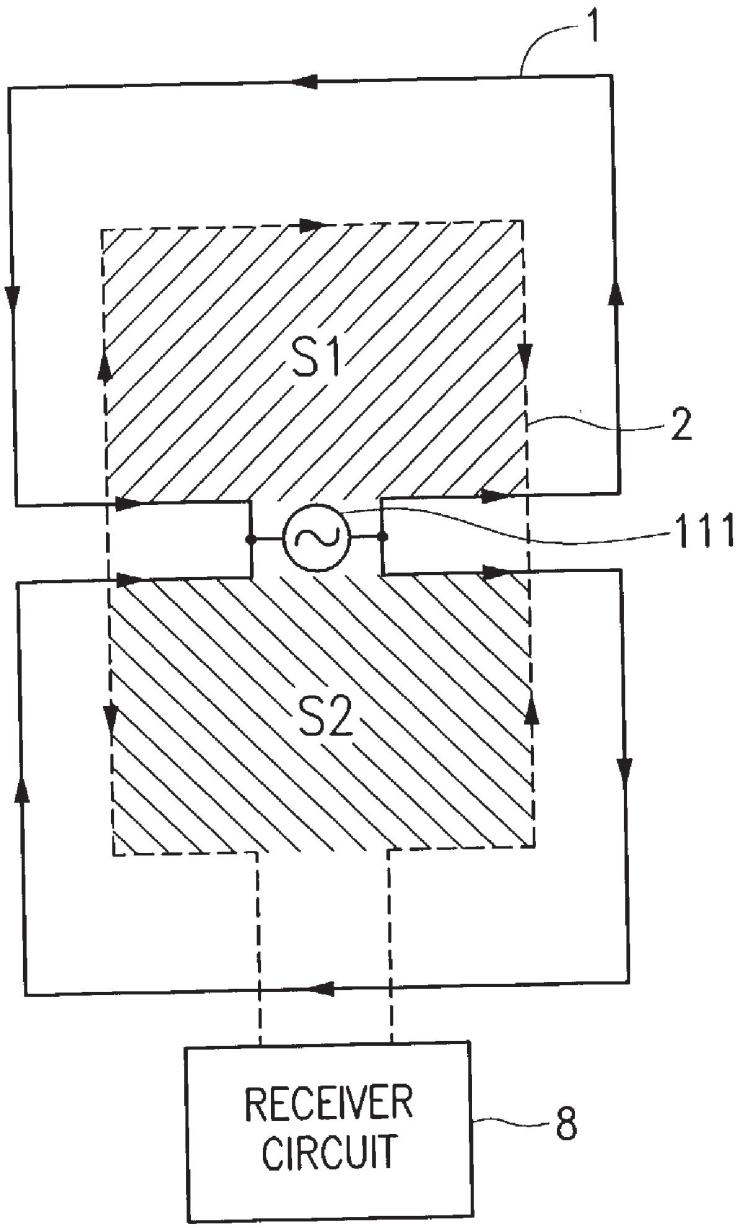


FIG. 12

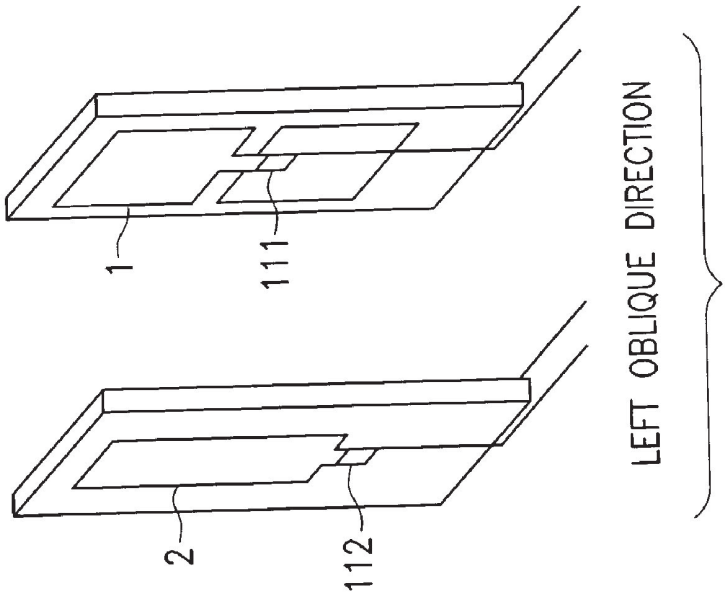


FIG. 13B

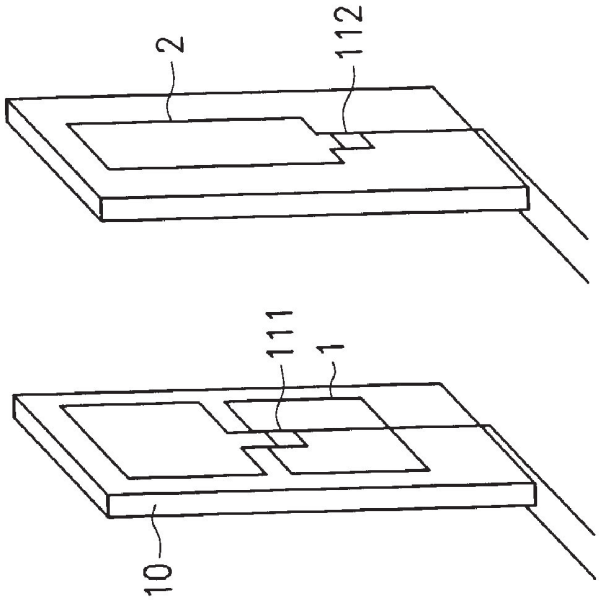


FIG. 13A

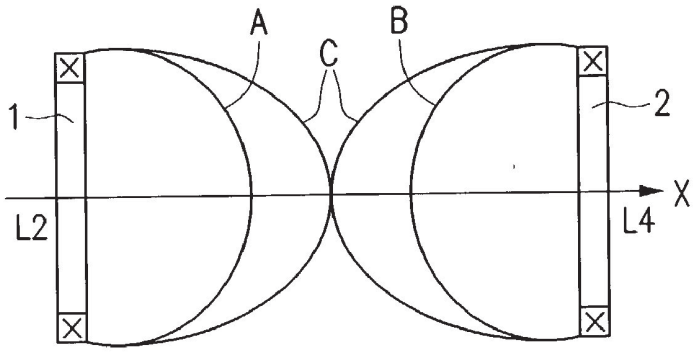


FIG. 14A

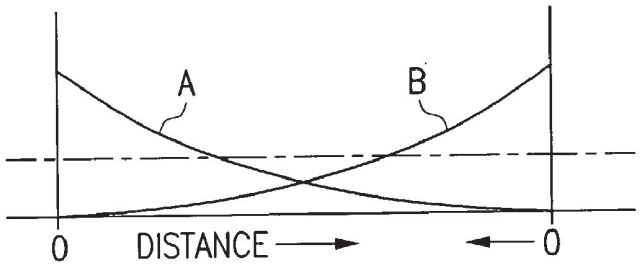


FIG. 14B

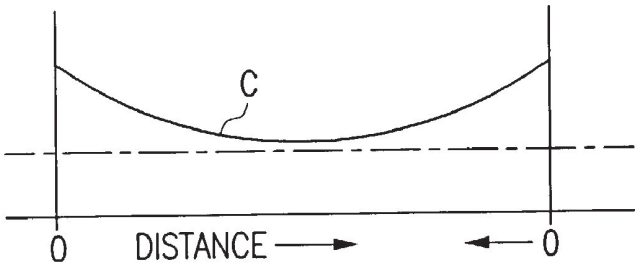


FIG. 14C




FIG. 15A




FIG. 15B

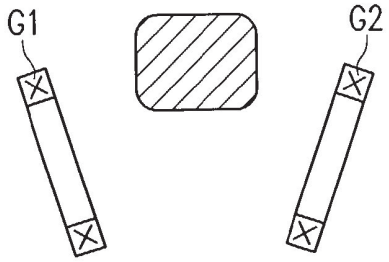


FIG. 15C

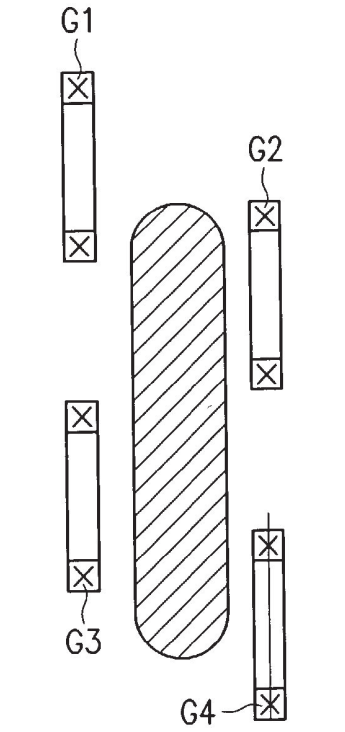


FIG. 15D




FIG. 15E

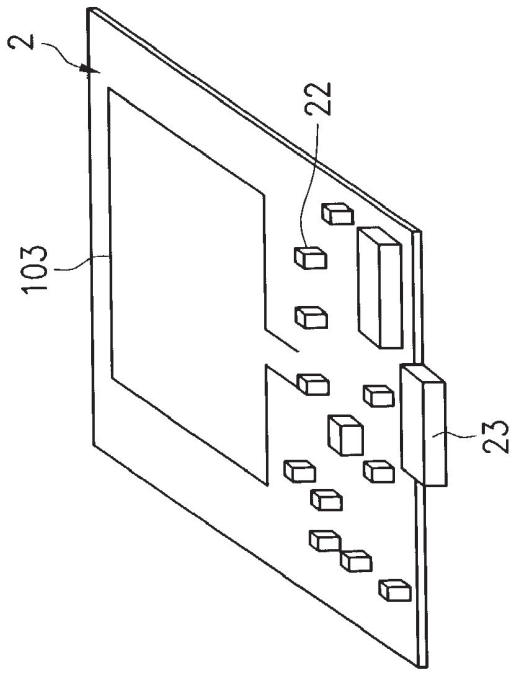


FIG. 16B

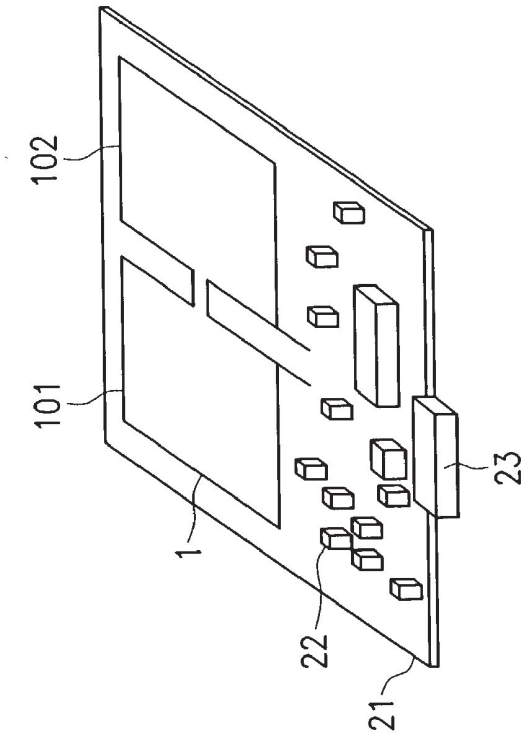


FIG. 16A

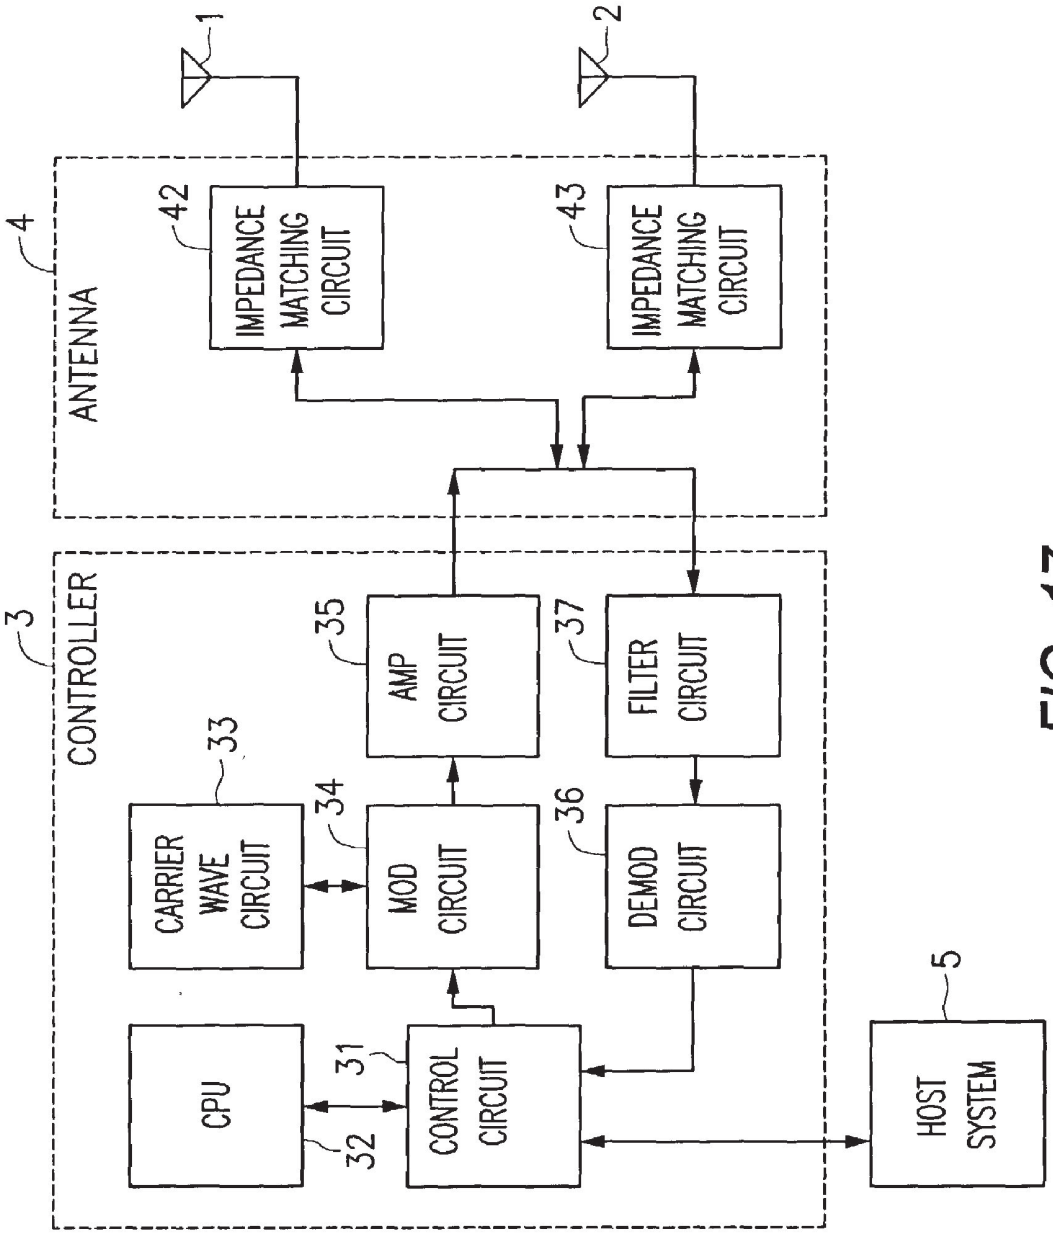

1
2
4
ANTENNA
42
IMPEDANCE MATCHING CIRCUIT
43
IMPEDANCE MATCHING CIRCUIT
3
CONTROLLER
35
AMP CIRCUIT
37
FILTER CIRCUIT
33
CARRIER WAVE CIRCUIT
34
MOD CIRCUIT
36
DEMOD CIRCUIT
CPU
31
CONTROL CIRCUIT
32
5
HOST SYSTEM

FIG. 17

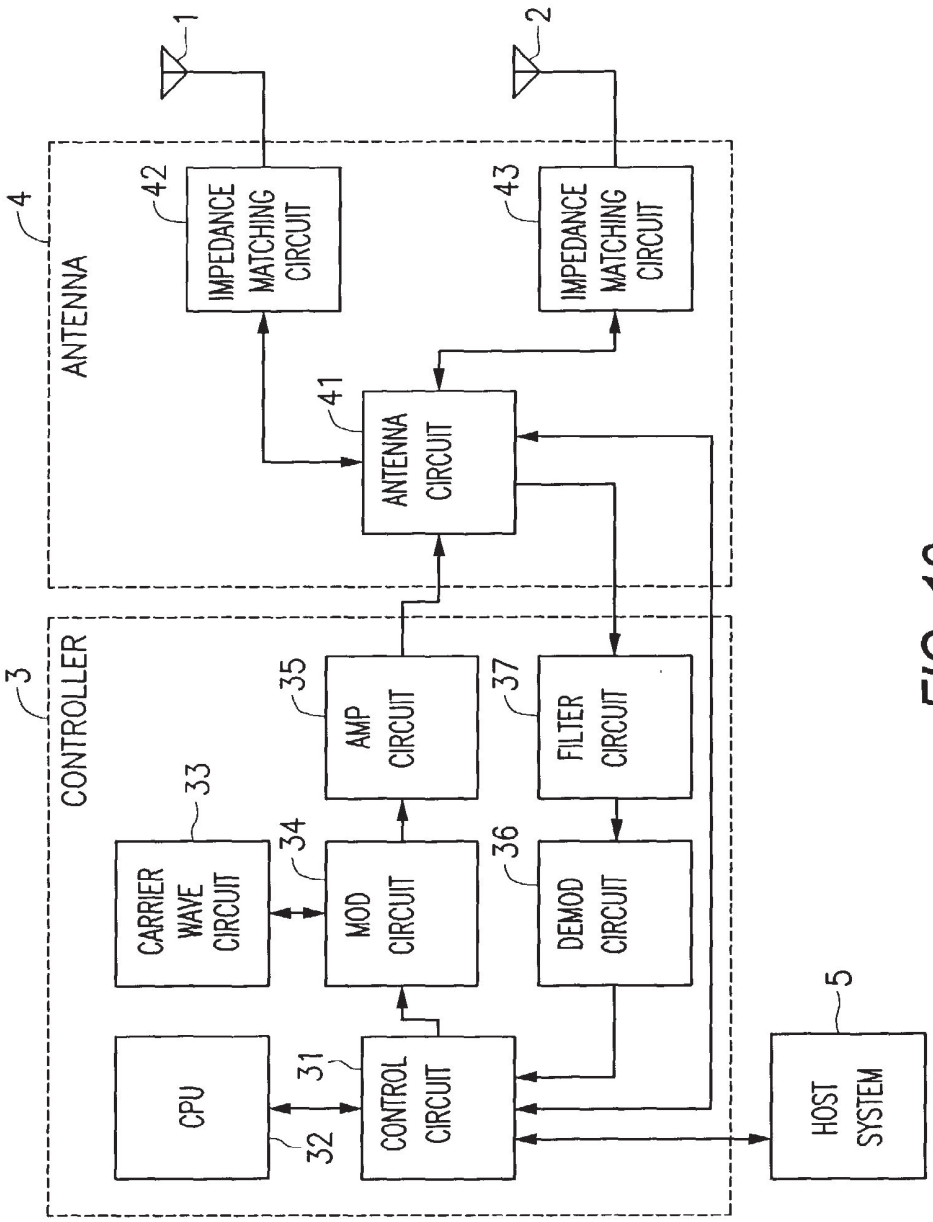

1
2
4
ANTENNA
42
IMPEDANCE MATCHING CIRCUIT
43
IMPEDANCE MATCHING CIRCUIT
41
ANTENNA CIRCUIT
3
CONTROLLER
35
AMP CIRCUIT
37
FILTER CIRCUIT
33
CARRIER WAVE CIRCUIT
34
MOD CIRCUIT
36
DEMOD CIRCUIT
CPU
31
32
CONTROL CIRCUIT
5
HOST SYSTEM

FIG. 18

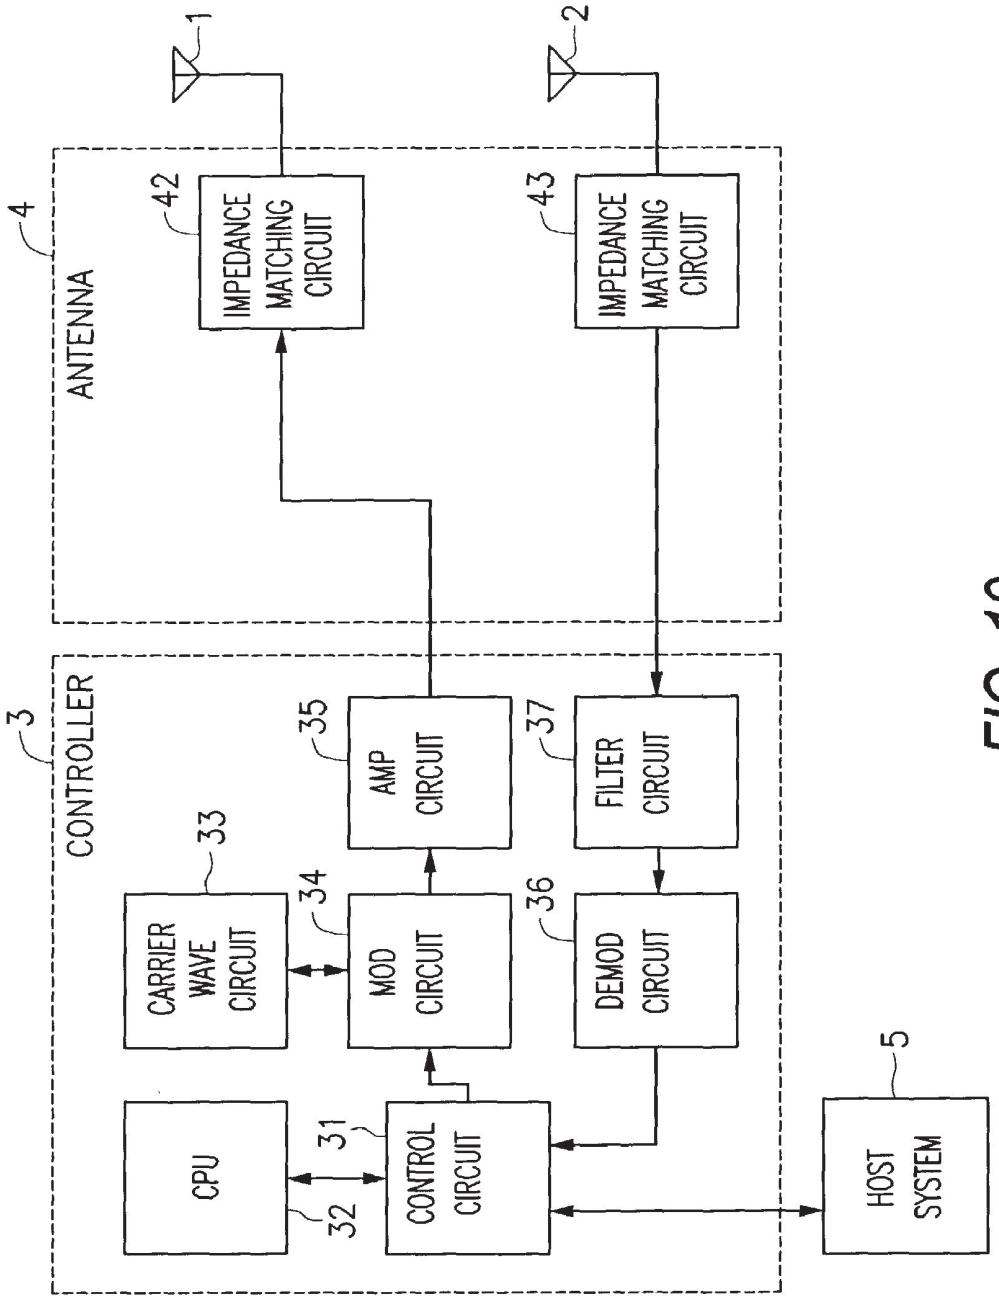

1
2
4
ANTENNA
42
IMPEDANCE MATCHING CIRCUIT
43
IMPEDANCE MATCHING CIRCUIT
3
CONTROLLER
35
AMP CIRCUIT
37
FILTER CIRCUIT
33
CARRIER WAVE CIRCUIT
34
MOD CIRCUIT
36
DEMOD CIRCUIT
CPU
31
32
CONTROL CIRCUIT
5
HOST SYSTEM

FIG. 19

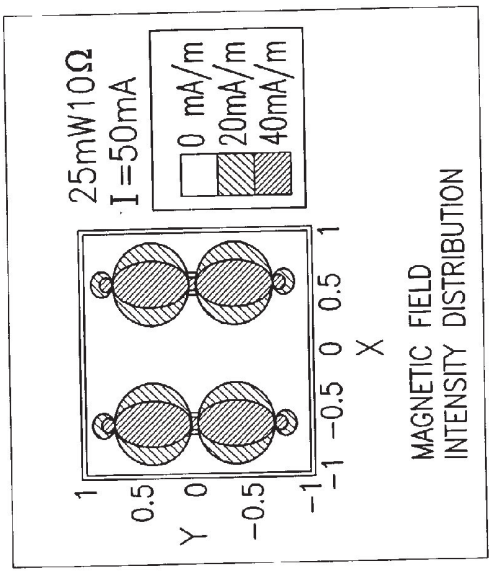


FIG. 20C

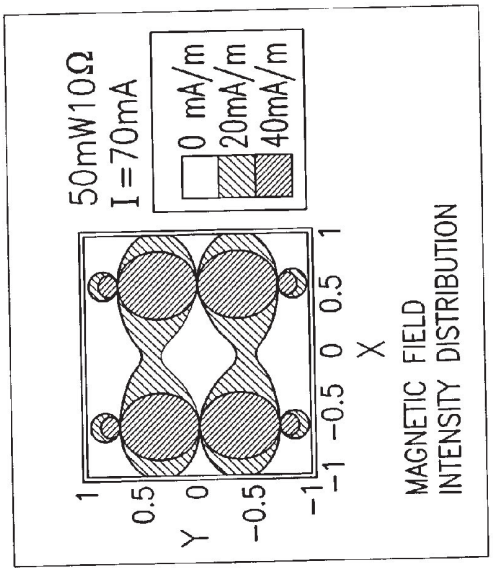


FIG. 20B

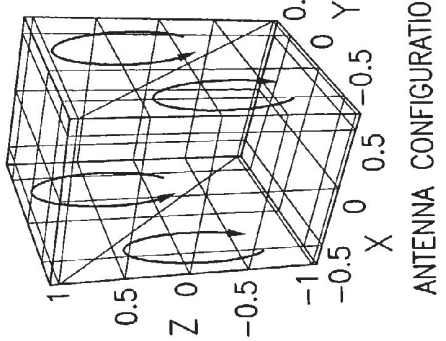


FIG. 20A

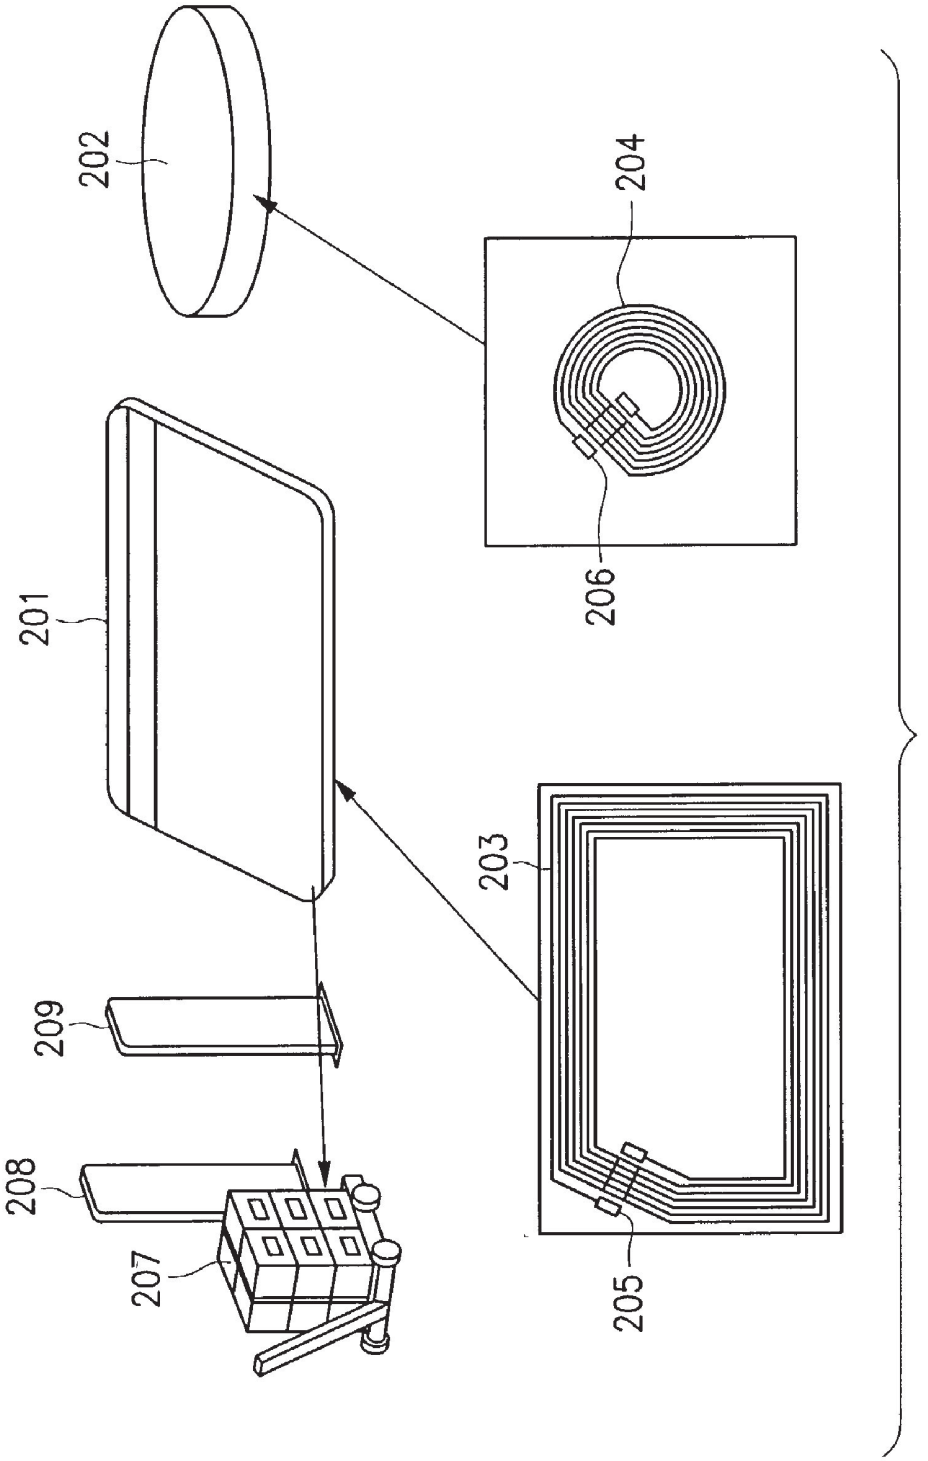


FIG. 21

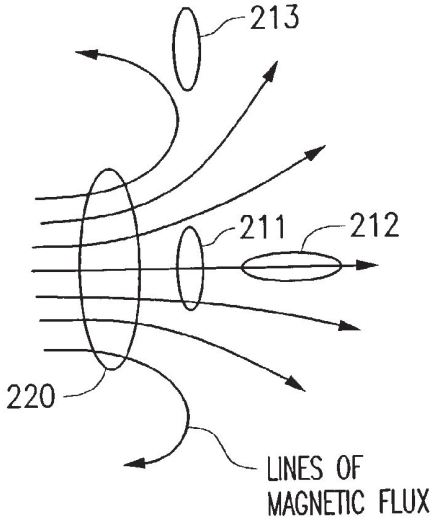

213
211
212
220
LINES OF
MAGNETIC FLUX

FIG. 22

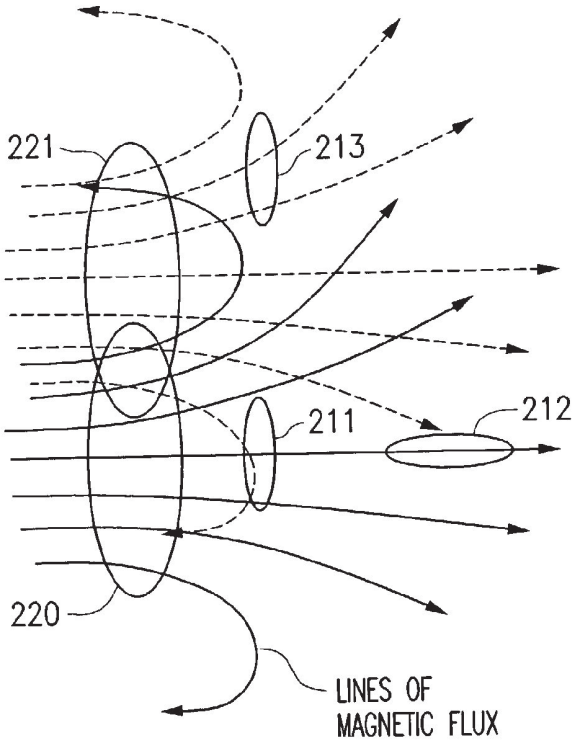

221
213
211
212
220
LINES OF
MAGNETIC FLUX

FIG. 23

RADIO GUIDANCE ANTENNA, DATA COMMUNICATION METHOD, AND NON-CONTACT DATA COMMUNICATION APPARATUS

BACKGROUND OF THE INVENTION

[0001] The invention relates to a radio guidance antenna, a data communication method, and a non-contact data communication apparatus, which make use of such antenna, and more particularly, to a radio guidance antenna for use in non-contact identification apparatus such as physical distribution systems, electronic coupon ticket systems, and the like, a data communication method, and a non-contact data communication apparatus, which make use of such antenna.

[0002] Conventionally, a system for identification and management of articles is needed in article identification apparatus such as assembly and conveyance lines and physical distribution systems, and electronic coupon ticket systems.

[0003] **FIG. 21** is a view showing the schematic constitution in such system. As shown in **FIG. 21**, data carriers (referred below to as tags) **201**, **202** of a non-contact identification apparatus are fabricated in a card-shape and a coin-shape to contain therein printed coils **203**, **204** and IC chips **205**, **206**. These tags **201**, **202** are attached to commodities **207** to be managed, and data are transmitted and received in a non-contact manner as the commodities are passed through antenna gates **208**, **209**. Thus, the tags are used as a tool of merchandise management and conveyance history management in the field of physical distribution, security and so on.

[0004] Radio guidance antennas are housed in the antenna gates **208**, **209** of the non-contact identification apparatus shown in **FIG. 21**. The most important point required for such radio guidance antennas is to ensure the magnetic-field intensity necessary for communication in all locations in a read area. Communication between a read and write device of the non-contact identification apparatus and the tags **201**, **202** makes use of mutual inductance coupling between antennas for transmission and reception and loop antennas **203**, **204** formed in the tags **201**, **202**.

[0005] Induced electromotive forces generated in the loop antennas **203**, **204** of the tags **201**, **202** can be represented by—M (di/dt) where M indicates mutual inductance between the antennas for transmission and reception and the loop antennas **203**, **204** in the tags **201**, **202** and i indicates electric current generated in the antennas for transmission. This means that in order to ensure a predetermined magnetic-field intensity when i=constant, mutual inductance M of at least a predetermined value must be generated. That is, in the case of M=0, electric power is not supplied to the tags **201**, **202** however great the current through the read antennas may be, and so communication between the read and write antennas and the tags **201**, **202** becomes impossible.

[0006] With conventional antennas, which are in many cases disposed on a single plane, however, regions where M=0 or M is very small are always present in read and write regions.

[0007] **FIG. 22** shows mutual inductance between loop antennas of one winding. In **FIG. 22**, lines of magnetic flux emitted from a transmission antenna **220** are indicated by solid lines with arrows, and it is shown that the more lines of magnetic flux per unit area, the larger magnetic flux density. Also, the magnetic flux density, at which magnetic flux generated by current through the transmission antenna **220** passes through an antenna loop of a tag, is in proportion to M between the read and write antenna and an antenna of the tag. Accordingly, it is shown that the more the number of lines of magnetic flux passing through the loop of the tag, the larger the mutual inductance M.

[0008] A tag **211** shown in **FIG. 22** is disposed on the same axis as that of the transmission antenna **220**, so that a transmission antenna loop and a loop of the tag are in parallel to each other. In the case of such positional relationship, it is shown that the number of interlinkages of lines of magnetic flux generated by the transmission antenna **220** is large and the mutual inductance M is large. In contrast, in the case where a tag **212** is disposed so that a loop of the transmission antenna **220** and a loop of the tag are perpendicular to each other, the lines of interlinking magnetic flux become 0, that is M=0.

[0009] **FIG. 22** also shows a tag **213** which is parallel to the transmission antenna **220** but disposed in a position offset from a surface of projection of the transmission antenna **220** in an axial direction. In this case, the number of lines of magnetic flux making interlinkage with the tag **213** is very small and the mutual inductance M becomes small. In the case of an antenna system with the transmission antenna **220** and only one feeding point, a region or regions where the mutual inductance M is 0 or very small are always present depending upon the position and direction of a tag. Accordingly, when such arrangement is used in an antenna system, in which a tag is not limited in orientation and a predetermined mutual inductance M is generated in a large area, it has been naturally necessary to increase the number of antennas and feeding points.

[0010] **FIG. 23** shows mutual inductance between loop antennas when there are provided two transmission antennas. Like the case in **FIG. 22, a** magnetic field radiated from a transmission antenna **221** provided in addition to the transmission antenna **220** is represented by lines of magnetic flux indicated by broken lines with arrows. In the case where the two transmission antennas **220**, **221** are installed, lines of magnetic flux generated by the transmission antenna **221** pass through tags **212**, **213**. However, the mutual inductance M between tags **212**, **213** and the transmission antenna **220** is not adequate. Thus, the mutual inductance M is generated between the tags and the transmission antenna **221**. Accordingly, the more the number of antennas, the more complex the magnetic field, so that there is an increased probability that communication will be enabled irrespective of directions and positions of tags.

[0011] However, the above-mentioned measure involves a significant problem. As shown in **FIG. 23**, many lines of magnetic flux make interlinkage with the transmission antennas **220**, **221** and thus the mutual inductance M between the transmission antennas is shown as being increased. That is, a part of electric power supplied to the transmission antenna **220** is also supplied to the transmission antenna **221** due to mutual induction, so that all of the electric power supplied to the transmission antenna **220** is not supplied as an antenna current to the transmission antenna **220**. Instead, a part of the electric power supplied to

transmission antenna **220** disadvantageously increases the remote electromagnetic-field intensity from the transmission antenna **221**.

[**0012**] In this manner, it is very difficult to arrange a plurality of antennas in an overlapping manner and control them independently. Because of this, in the case of using a plurality of antennas, the antennas are conventionally arranged with particular distances therebetween so that mutual inductance between the antennas becomes small, but it becomes difficult to assure the stability of read and write regions.

[**0013**] One way to solve the above-described problem is with a three-dimensionally perpendicular arrangement of antennas as described in Japanese Laid-Open Patent Application No. 2000-251030. However, antennas of such construction have been too complex and expensive to be practical.

BRIEF SUMMARY OF THE INVENTION

[**0014**] Therefore, a primary object of the invention is to provide a radio guidance antenna in which the sum of mutual inductances of antennas is small and which is inexpensive and excellent in quality of communication, a data communication method, and a non-contact data communication apparatus which makes use of the antenna.

[**0015**] The invention provides a radio guidance antenna comprising at least first and second antennas, which are different in electric supply method, and wherein the first antenna has at least two regions for generating lines of magnetic flux in reciprocal directions, and the second antenna has first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna, the second antenna being arranged so that the sum of mutual inductances between it and the first antenna is decreased.

[**0016**] The coupling of the antennas is composed of inductive coupling with a slight mutual induction and electrostatic coupling, so that even when the antennas are arranged on parallel planes and a state of feeding electricity to a certain antenna is changed with time, it is possible to decrease influences on another antenna. That is, since electric power as supplied can be efficiently converted to electromagnetic field with a simple construction and a remote electromagnetic-field intensity can also be suppressed to be small, it is possible to realize a radio guidance antenna which is small, lightweight and excellent in quality of communication.

[**0017**] Also, the invention has a feature in that the difference in value between the first and second mutual inductances is equal to or less than one half of the self inductance of the first antenna. Also, the invention has a feature in that the difference in value between the first and second mutual inductances is equal to or less than one third of the self inductance of the first antenna. Further, the invention has a feature in that the first antenna comprises two or more antennas.

[**0018**] Further, the invention has a feature in that the first and second antennas include feeding points provided in different positions, respectively. Further, the invention has a feature in that the first antenna is formed in a substantially figure eight-shape in order to generate lines of magnetic flux in reciprocal directions. Also, the invention has a feature in that the second antenna is formed in a substantially figure eight-shape and arranged in a position turned 90 degrees relative to the first antenna.

[**0019**] Another invention provides a method for data communication with a tag in non-contact manner with electromagnetic induction, the method comprising providing a radio guidance antenna including a first antenna having at least two regions for generating lines of magnetic flux in reciprocal directions, and a second antenna having first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna, the second antenna being arranged so that the sum of mutual inductances between it and the first antenna is decreased, and sending data to the tag from one of the first and second antennas with electromagnetic induction, and causing the other of the first and second antennas to receive data sent from the tag with electromagnetic induction.

[**0020**] A further invention provides a non-contact data communication apparatus for data communication with a tag in non-contact manner with electromagnetic induction, the apparatus comprising a radio guidance antenna including a first antenna having at least two regions for generating lines of magnetic flux in reciprocal directions, and a second antenna having first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna, the second antenna being arranged so that the sum of mutual inductances between it and the first antenna is decreased, and transmission means for sending data to the tag from either of the first and second antennas with electromagnetic induction.

[**0021**] A still further invention provides a non-contact data communication apparatus for data communication with a tag in non-contact manner with electromagnetic induction, the apparatus comprising a radio guidance antenna including a first antenna having at least two regions for generating lines of magnetic flux in reciprocal directions, and a second antenna having first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna, the second antenna being arranged so that the sum of mutual inductances between it and the first antenna is decreased, and receiver means for receiving data sent from the tag to either of the first and second antennas with electromagnetic induction.

[**0022**] According to these inventions, electric power as supplied can be efficiently converted to electromagnetic field with a radio guidance antenna for transmission and reception, and data communication is enabled in a communication area in non-contact manner even when a tag is oriented in any direction. Also, in these inventions, the radio guidance antenna is arranged on a substrate and the transmission means or receiver means is arranged on the substrate. Thereby, it is possible to make a data communication apparatus which is small-sized, lightweight and high in performance.

BRIEF DESCRIPTION OF THE DRAWINGS

[**0023**] **FIG. 1** is a block diagram showing a system configuration according to an embodiment of the invention;

[0024] **FIG. 2** is a flowchart showing the processing procedure in a CPU of a controller **3** shown in **FIG. 1**;

[0025] **FIG. 3** is a view showing a preferred embodiment of antennas **1**, **2** shown in **FIG. 1**;

[0026] **FIG. 4** is a view showing only lines of magnetic flux generated from the antenna **1** shown in **FIG. 3** at a certain point of time;

[0027] **FIG. 5** is a view showing only lines of magnetic flux generated from the antenna **2** shown in **FIG. 3** at a certain point of time;

[0028] **FIGS. 6A** to **6**E are views showing a preferable construction of the antenna shown in **FIG. 3**;

[0029] **FIGS. 7A** to **7**D are views showing another construction of the antenna shown in **FIG. 3**;

[0030] **FIGS. 8A** to **8**E are views showing another modification of the antenna shown in **FIG. 3**;

[0031] **FIG. 9** is a view showing an antenna configuration according to a further embodiment of the invention;

[0032] **FIGS. 10A** to **10**E are views showing a more concrete structure of the antenna shown in **FIG. 9**;

[0033] **FIGS. 11A** to **11**D are views showing applications of a radio guidance antenna according to the invention;

[0034] **FIG. 12** is a view showing a further embodiment of a radio guidance antenna according to the invention;

[0035] **FIGS. 13A and 13B** are views showing an application in which antennas are installed to face each other in a gate-like manner;

[0036] **FIGS. 14A** to **14**C are views showing the relationship between a reception distance and the antennas in the embodiment shown in **FIGS. 13A and 13B**;

[0037] **FIGS. 15A** to **15**E are views showing examples of an arrangement of gates G**1**, G**2** composed of two antennas shown in **FIGS. 13A and 13B**;

[0038] **FIGS. 16A and 16B** are views showing a preferred embodiment of a radio guidance antenna according to the invention;

[0039] **FIG. 17** is a block diagram showing a communication system, in which transmission signals are fed to both two antennas at the same time;

[0040] **FIG. 18** is a view showing a further embodiment of a communication system with a radio guidance antenna;

[0041] **FIG. 19** is a block diagram showing a still further embodiment of a communication system with a radio guidance antenna;

[0042] **FIGS. 20A** to **20**C are views showing examinations of an effect provided by the embodiment of the invention through calculation of electromagnetic-field intensity;

[0043] **FIG. 21** is a view showing the schematic constitution of a system for identification and management of articles;

[0044] **FIG. 22** is a view showing mutual inductance between a transmission loop antenna of one winding and loop antennas on a side of tags; and

[0045] **FIG. 23** is a view showing mutual inductance between transmission loop antennas when there are provided two transmission antennas.

DETAILED DESCRIPTION OF THE INVENTION

[0046] **FIG. 1** is a block diagram showing a system configuration according to an embodiment of the invention. The system configuration shown in **FIG. 1** is shown as a preferred embodiment adopting an amplitude modulation with a power circuit removed.

[0047] In **FIG. 1, a** non-contact identification apparatus is composed of a first antenna **1**, a second antenna **2**, a controller **3**, and an antenna peripheral circuit **4**. The controller **3** mainly functions as an interrogator for reading and writing data into a storage circuit **62** of a tag **6**. Thus the controller **3** includes a control circuit **31**, a CPU **32**, a carrier wave generating circuit **33**, a modulation circuit **34**, an amplifier circuit **35**, a demodulator circuit **36**, and a filter circuit **37**. Also, the antenna peripheral circuit **4** includes an antenna select circuit **41** and impedance matching circuits **42**, **43**, the antenna **1** being connected to the impedance matching circuit **42**, and the antenna **2** being connected to the impedance matching circuit **43**.

[0048] The controller **3** is connected to a host system **5**, and coded data from a storage device of the CPU **32** are given to the modulation circuit **34** via the control circuit **31**. The modulation circuit **34** mixes carrier waves output by the carrier wave generating circuit **33** and superimposes data on the waves, and the modulated carrier waves thus mixed are amplified by the amplifier circuit **35** to be fed to the antenna **1** or **2** via the impedance matching circuit **42** or **43** from the antenna select circuit **41**. Then the waves are discharged into the air as an electromagnetic field from the selected antenna **1** or **2**.

[0049] Meanwhile, the tag **6** includes an antenna **61** composed of a printed coil, the storage circuit **62**, a control circuit **63**, a modulation circuit **64**, an impedance matching circuit **65**, a demodulator circuit **66**, and a detector circuit **67**. Not all tags are provided with the impedance matching circuit **65**. An electromagnetic field emitted from the antenna **1** or **2** of the non-contact identification apparatus generates an induced electromotive force in the antenna **61** of the tag **6** to provide electric power required for the tag. At the same time, the induced electromotive force generated in the antenna **61** is passed to the demodulator circuit **66** via the impedance matching circuit **65**, the carrier waves are removed by the demodulator circuit **66**, the signal is decoded by the detector circuit **67**, and the decoded data is sent to the control circuit **63**. The control circuit **63** stores the data in the storage circuit **62**.

[0050] Subsequently, when data are to be read from the tag **6**, the controller **3** sends a read command to the control circuit **63** of the tag **6**. The control circuit **63** of the tag **6** reads the data from a region of the storage circuit **62** indicated by the controller **3** and changes the impedance of the antenna **61** with the modulation circuit **64** of the tag **6**. The antenna **61** of the tag **6** and the antenna **1** or **2** of the non-contact identification apparatus are coupled to each other via mutual inductance, so that when the impedance of the antenna **61** of the tag **6** is changed, the antenna impedance on the side of the non-contact identification apparatus

changes. Thus, voltage input into the demodulator circuit **36** from the antenna peripheral circuit **4** through the filter circuit **37** also changes. The carrier waves are removed by the demodulator circuit **36**, the signal is decoded, and the resultant data is written into the storage device of the CPU **32** by the control circuit **31**.

[**0051**] In this manner, data communication is accomplished by repeating reading and writing of data between the tag **6** and the non-contact identification apparatus. An explanation has been given by way of example with respect to the amplitude modulation system but the present invention is not limited thereto.

[**0052**] **FIG. 2** is a flowchart showing the processing procedure in the CPU of the controller **3** shown in **FIG. 1**. In **FIG. 2**, the CPU **32** is initialized in STEP (denoted by SP by abbreviation in the figure) SP**1** after power-ON, it is determined in STEP SP**2** whether antenna switching should be effected or not, and a predetermined antenna is put in a selected state in STEP SP**3** in the case of a command for antenna switching. The procedure stands ready in STEP SP**4** until electric power becomes stable. Thus the procedure stands ready for a predetermined time until electric power supplied via electromagnetic coupling becomes stable on a side of the tag **6**.

[**0053**] The CPU **32** discriminates between a write command and a read command in STEP SP**5** on the basis of a command received from the host system **5**. In the case of a write command, a write command is sent in STEP SP**6**, and written data are sent in STEP SP**7**. In the case of a read command, a read command is sent in STEP SP**8**, and it is determined in STEP SP**9** whether read data has been received or not, so that when read data have been received, the read data are written into the storage device in the CPU **32** in STEP SP**10**. If the read data have not yet been received, it is determined in STEP SP**11** whether or not a read wait time has elapsed, and STEP SP**9** and STEP SP**11** are repeated until the read wait time elapses. If the read wait time has elapsed, the procedure proceeds to STEP SP**2**.

[**0054**] In this manner, reading and writing of data is carried out between the non-contact identification apparatus and the tag **6**.

[**0055**] **FIG. 3** is a view showing a preferred embodiment of the antennas **1** and **2** shown in **FIG. 1**. In **FIG. 3**, the first antenna **1** is provided by forming antenna conductors **101**, **102** in a substantially figure eight shape, which reduces a remote electromagnetic-field effect. The first antenna **1** is divided into upper and lower halves by the antenna conductors **101**, **102**. Meanwhile, the second antenna **2** is composed of an antenna conductor **103** formed on the same plane as or a plane parallel to the plane on which the first antenna **1** is formed, but is not connected to the first antenna **1** at any point. The second antenna **2** is coupled in electromagnetic induction to the upper and lower halves of the first antenna **1** via regions S**1**, S**2**.

[**0056**] The first antenna **1** is supplied with electric power from a first feeding point **111**, and an increase in antenna current for the first antenna **1** is observed. Arrows shown on the antenna **1** indicate a direction of antenna current observed at a certain point of time. Also, the second antenna **2** is supplied with electric power from a second feeding point **112**. Arrows shown on the antenna **2** indicate directions of induced electromotive forces caused by mutual inductance between it and the antenna **1** as directions of induced electric power. This electric power is caused by the flowing of the induced electromotive forces described above.

[**0057**] As shown in **FIG. 3**, the directions of induced electromotive forces generated on the antenna **2** are such that induced current is caused to flow in the regions S**1**, S**2** in opposite directions. That is, induced electromotive forces generated in the regions S**1**, S**2**, respectively, are generated in the direction in which the forces cancel each other. Here, in particular, in the case of S**1**/S**2**=1 (S**1**=S**2**), the induced electromotive force generated on the antenna **2** as a whole becomes zero. That is, residual mutual inductances of the antenna **1** and the antenna **2** are put in a state of zero.

[**0058**] Likewise, in the case where the antenna **2** is supplied with electric power from the second feeding point **112**, the mutual inductance regions S**1**, S**2** overlap each other and so induced electromotive forces are generated on the antenna **1**. In particular, in the case of S**1**=S**2**, the residual mutual inductance becomes zero, so that any induced electromotive force is not generated on the antenna **1**. This means that electric power as supplied is not taken by another antenna, antenna current is not generated by electric power supplied to another antenna, and the system is equivalent to one provided with feeding points and antennas in two independent systems.

[**0059**] More specifically, even when one of the antennas is varied in impedance and a power feeding state, the other antenna is influenced thereby not to be varied in impedance and antenna current. In this way, electric power supplied to the antennas can be converted to an electromagnetic field with high efficiency and a plurality of antennas can be installed, while the remote electromagnetic-field intensity is also controlled at an exceedingly low level.

[**0060**] An explanation will now be given of the relationship between self inductance and mutual inductance of the radio guidance antenna according to the invention. Assuming that self inductance generated on the antenna conductors **101**, **102** of the antenna **1** is L_1 and the difference ($|M_1-M_2|$) between a first mutual inductance M_1 and a second mutual inductance M_2, which generate opposite induced electromotive forces on the antenna **2** with electromagnetic induction from the antenna **1** is a residual mutual inductance M_r, an equivalent inductance of the antenna **1** is represented by L_1-M_r, and so in the case of $M_r=(L_1/2)$, the equivalent inductance of the antenna **1** will become $L_1/2$. That is, since the equivalent inductance of the antenna **1** is equal to the residual mutual inductance, the signal electric power supplied to the antenna **1** becomes equal to a signal induced electromotive force generated on the antenna **2** under electromagnetic induction from the antenna **1**.

[**0061**] Also, when $M_r>(L_1/2)$, half or more of the signal electric power supplied to the antenna **1** is induced to the antenna **2**, so that the electromagnetic field generated from the antenna **1** is sharply decreased, and the electromagnetic field emitted from the antenna **2** stands out conspicuously as a remote electromagnetic-field intensity, so that the non-contact identification apparatus of the present invention can no longer function as a transmission and reception antenna. Taking these into consideration, a residual mutual inductance $M_r=0$ is most preferable, while by making the residual inductance M_r equal to or less than a half of the self

inductance of the antenna **1**, the antenna can be made an antenna which efficiently generates an electromagnetic field and suppresses a remote electromagnetic-field intensity.

[**0062**] Also, more preferably, by making the residual mutual inductance M_r equal to or less than one third of the self inductance L_1 of the antenna **1**, the signal electric power supplied to the antenna **1** becomes twice the signal electric power induced to the antenna **2**, thus making the antenna more efficient.

[**0063**] **FIGS. 4 and 5** show the appearance of a magnetic field caused by the antenna shown in **FIG. 3** when the antenna is in communication with the tag. In particular, **FIG. 4** shows only lines of magnetic flux generated from the antenna **1** (shown in **FIG. 3**) at a certain point of time, and **FIG. 5** shows only lines of magnetic flux generated from the antenna **2** (shown in **FIG. 3**) at a certain point of time.

[**0064**] In **FIG. 4**, lines of magnetic flux indicated by solid lines are ones generated from a lower loop among two upper and lower loops of the antenna **1**, and lines of magnetic flux indicated by broken lines are ones generated from the upper loop. The lines of magnetic flux indicated by solid lines and the lines of magnetic flux indicated by broken lines, which are substantially the same in number, make interlinkage with a tag **211**, and the lines of magnetic flux indicated by solid lines and the lines of magnetic flux indicated by broken lines, which make such interlinkage, are equal in magnitude to each other and directed opposite to each other all the time. Therefore, the induced electromotive force generated on the tag **211** becomes substantially zero and so the tag **211** has difficulty remaining in continual communication with the antenna **1**. Also, a second tag **213** is positioned to be perpendicular to the lower loop, and so no lines of magnetic flux indicated by solid lines make interlinkage with this tag. Only lines of magnetic flux indicated by broken lines and having an exceedingly small intensity (not shown) male interlinkage with the tag **213** difficult, which in turn impedes communication. A third tag **212** makes interlinkage with many lines of magnetic flux indicated by broken lines and is shown as being in a state in which it can favorably make communication with the antenna **1**.

[**0065**] **FIG. 5** shows a state in which many lines of magnetic flux make interlinkage with the tag **211** and the tag **213** which have difficulty communicating with the antenna **1**, but favorably communicate with the antenna **2**. Meanwhile, lines of magnetic flux making interlinkage with the tag **212** which has been put in a state of favorable communication with the antenna **1** are exceedingly weak and have difficulty in communication.

[**0066**] **FIGS. 6A** to **6**E are views showing a preferable construction of the antenna shown in **FIG. 3**, specifically, **FIG. 6A** being a plan view, **FIG. 6B** being a front view, **FIG. 6C** being a cross sectional view taken along the line C-C in **FIG. 6**B, **FIG. 6D** being a side elevational view, and **FIG. 6E** being a rear view.

[**0067**] In **FIGS. 6A** to **6**E, thin band-shaped antenna conductors **101**, **102** are disposed on one of main surfaces of a plate-shaped insulation **10** in a rectangular configuration to form an antenna **1**, and a feeding point **111** is provided at a connection of the antenna conductors **101**, **102**. A thin band-shaped antenna conductor **103** is disposed on the other of the main surfaces of the insulation **10** in a rectangular configuration to form an antenna **2**, and a feeding point **112** is provided in a lower portion of the antenna.

[**0068**] As examples of the insulation **10**, it is possible to adopt printed-circuit boards, general purpose plastic and the like. Also, examples of the antenna conductors **101**, **102** may include metallic plates of copper, aluminum, brass and so on, and copper foil for use in printed-circuit boards.

[**0069**] **FIGS. 7A** to **7**D are structural views showing another construction of the antennas **1** and **2**. Specifically, **FIG. 7A** is a plan view, **FIG. 7B** is a front view, **FIG. 7C** is a cross sectional view taken along the line C-C in **FIG. 7**B, while **FIG. 7D** is a side elevational view.

[**0070**] In **FIGS. 7A** to **7**D, antennas **1** and **2** are arranged on either of same planes of an insulation **10**, and two-level crossings **110** are provided to insulate locations where antenna conductors **101**, **102** of the antenna **1** and an antenna conductor **103** of the antenna **2** intersect each other. With such an arrangement, the antenna **1** and the antenna **2** can be made equal in distance from a tag as compared with the arrangement shown in **FIGS. 6A** to **6**E. The arrangement shown in **FIGS. 7A** to **7**D is effective in the case where either of the antenna **1** and the antenna **2** is more distant from the tag, so that stability in communication is hard to achieve.

[**0071**] **FIGS. 8A** to **8**E are views showing another modification of the antenna shown in **FIG. 3** Specifically, **FIG. 8A** is a plan view, **FIG. 8B** is a front view, **FIG. 8C** is a cross sectional view taken along the line C-C in **FIG. 8**B, while **FIG. 8D** is a side elevational view, and **FIG. 8E** is a rear view.

[**0072**] The examples shown in **FIGS. 8A** to **8**E are substantially the same in antenna configuration as that shown in **FIG. 3** except that a first feeding point **111** and a second feeding point **112** are disposed on a lower side of an insulation **10**. With such an arrangement, the two feeding points **111**, **112** are nearer to each other, which is favorable in wiring. That is, such arrangement is realized by two-level crossing centers of the antenna **1** having a substantially figure eight-shaped region, thereby forming two regions which generate repulsive lines of magnetic flux on the antenna **1**.

[**0073**] **FIG. 9** is a view showing an antenna configuration according to a further embodiment of the invention. In **FIG. 9**, an antenna **1** is substantially figure eight-shaped in the same manner as that shown in **FIG. 3**, and an antenna **2** is turned 90° relative to the antenna **1**. In this case, an explanation will be given to the case where the antenna **1** is supplied with electricity, in the same manner as that shown in **FIG. 3**.

[**0074**] The antenna **1** and the antenna **2** overlap each other in regions **S1**, **S2**, **S3** and **S4**. If an increase in antenna current in directions shown by arrows is observed in the antenna **1**, then mutual inductances attributable to the regions **S1** to **S4** generate induced electromotive forces in the antenna **2** tending to make antenna current flow in directions shown by arrows, respectively. Directions of the induced electromotive forces are such that the regions **S1**, **S2** generate an electromotive force in the antenna **2** tending to make antenna current flow in the same direction and the induced electromotive force attributable to the regions **S3**, **S4** is opposite to the induced electromotive force attributable to the regions **S1**, **S2**.

[0075] Accordingly, in the case of S1+S2=S3+S4, the residual mutual inductance becomes zero and so the induced electromotive force generated on the antenna **2** by the antenna **1** becomes apparently zero. In like manner, the induced electromotive force generated on the antenna **1** when the antenna **2** is supplied with electricity becomes the same as above.

[0076] **FIGS. 10A** to **10**E are views showing a more concrete structure of the antenna shown in **FIG. 9**. Specifically, **FIG. 10A** is a plan view, **FIG. 10B** is a front view, **FIG. 10C** is a cross sectional view taken along the line C-C in **FIG. 10**B, **FIG. 10D** is a side elevational view, and **FIG. 10E** is a rear view.

[0077] In **FIGS. 10A** to **10**E, antenna conductors **101, 102** are used to form an antenna **1** on one of main surfaces of an insulation **10** in a substantially figure eight-shaped configuration, and antenna conductors **104, 105** are used to form an antenna **2** on the other of the main surfaces of the insulation **10** in a substantially figure eight-shaped configuration, the antenna **2** being turned 90° relative to the antenna **1**.

[0078] **FIGS. 11A** to **11**D are views showing applications of the radio guidance antenna according to the invention, in which the arrangement shown in **FIG. 3** and the arrangement shown in **FIG. 9** are combined with each other. Respective antennas are composed of three sets of antennas **11, 12, 13** having different feeding points and separated from one another. More specifically, **FIG. 11A** shows the three sets of antennas as a whole, **FIG. 11B** showing only the antennas **11, 12, FIG. 11C** showing the antennas **11, 13**, and **FIG. 11D** showing only the antennas **12, 13**. Feeding points **113, 114, 115** are formed on the respective antennas **11, 12, 13**, respectively.

[0079] Taking account of residual mutual inductances of the three sets of antennas **11, 12, 13** in terms of relationships between the respective two sets of antennas, the relationship between the antennas **11, 12** is represented by S1+S2=S3+S4 and is thus equivalent to the relationship between the two sets of antennas shown in **FIG. 9**, while the relationship between the antennas **11, 13** and the relationship between the antennas **12, 13** are represented by S5=S6 and S7=S8 and is thus equivalent to the relationship between the two sets of antennas shown in **FIG. 3**. Accordingly, these three sets of antennas **11, 12, 13** have residual mutual inductances of 0 and can be used as an antenna having a small remote electromagnetic-field intensity to be able to supply electricity with high efficiency. All three sets of antennas may be used as transmission and reception antennas or one of them may be used as an antenna for exclusive use in reception.

[0080] **FIG. 12** is a view showing a further embodiment of the radio guidance antenna according to the invention. In **FIG. 12**, antennas **1, 2** are constituted in the same manner as those in the radio guidance antenna shown in **FIG. 3** except that the antenna **2** is not provided with any feeding point but is connected to a receiver circuit **8**. Current caused by inductive coupling and electrostatic coupling flows to the antenna **2** from the antenna **1**. In the present embodiment, since the antennas **1, 2** are small in degree of coupling, electric power supplied to the antenna **1** is radiated as an electromagnetic field from the antenna **1** with high efficiency. Also, the reception current generated in the antenna **2** connected to the receiver circuit **8** is not excessively absorbed by the antenna **1** but can be efficiently input into the receiver circuit **8**.

[0081] **FIGS. 13A and 13B** are views showing an application, in which antennas are installed to face each other in a gate-like manner. Gates on respective sides are the same in structure as that shown in **FIGS. 6A** to **6**E, **FIG. 13A** being a view of the gates as viewed in a right oblique direction, and **FIG. 13B** being a view of the gates as viewed in a left oblique direction. A "send" signal is fed to an antenna **1** via a feeding point **111** by way of a coaxial cable, and an antenna **2** is also connected to a coaxial cable via feeding point **112**. In the present embodiment, the antenna **2** can be also used for transmission and reception and as an antenna for exclusive use in reception.

[0082] In addition, the antennas **1, 2** have an impedance of around 5 Ω while the coaxial cable has an impedance of 50 Ω, so that the antennas **1, 2** and the coaxial cable are connected to the respective feeding points **111, 112** via impedance translate circuits (not shown).

[0083] **FIGS. 14A** to **14**C are views showing the relationship between a reception distance and the antennas **1, 2** in the embodiment shown in **FIGS. 13A and 13B**. Assuming that a magnetic field distribution from the antenna **1** is denoted by A and a magnetic field distribution from the antenna **2** is denoted by B in **FIG. 14**A, the magnetic field distributions, shown in **FIG. 14**B, from the antennas **1, 2** are composed as shown in **FIG. 14C** to enable stabilization in communication.

[0084] **FIGS. 15A** to **15**E are views showing examples of an arrangement of gates G**1**, G**2** composed of two antennas **1, 2**. **FIG. 15A** shows that the two gates G**1**, G**2** are arranged in parallel, and **FIG. 15B** shows that the two gates G**1**, G**2** are arranged in opposition to each other and with their center distances offset. **FIG. 15C** shows that a pair of the gates G**1**, G**2** are arranged obliquely relative to a parallel state, and **FIG. 15D** shows that a multiplicity of gates G**1** to G**4** are alternately arranged so that an elongate hatched region between the gates is capable of communication. Such gate construction can be expected to be applied in a wide field such as shop lifting prevention, security, management of material distribution or the like. Also, even if the arrangement shown in **FIG. 15E** is the same as that shown in **FIG. 15B** except that the gates are extended to true up both ends thereof, the essence of the invention is not impaired.

[0085] **FIGS. 16A and 16B** are views showing a preferred embodiment of the radio guidance antenna according to the invention, **FIG. 16A** being a view as viewed from above, and **FIG. 16B** being a view as viewed from a rear side. As shown in **FIG. 16**A, antenna conductors **101, 102** are used to form an antenna **1** on a surface of an insulation such as a printed board **21**, to which electronic parts **22** and a connector **23** are mounted. As shown in **FIG. 16**B, an antenna conductor **103** is used to form an antenna **2** on a rear surface of the printed board **21**, to which electronic parts **22** are mounted. These electronic parts **22** and connector **23** constitute the controller **3** and the antenna peripheral circuit **4** shown in **FIG. 1**, which can be made integral with the antennas **1, 2**.

[0086] The substrate used in the present invention is not limited to the printed board **21** but can be formed of an insulating film and an insulating material, on which a metallic paste is applied to provide an equivalent function to that of the board. As seen from **FIGS. 16A and 16B**, a radio guidance antenna is used to constitute a communication

system, thereby enabling a small-sized, lightweight communication system of high performance.

[0087] **FIG. 17** is a block diagram showing a communication system, in which transmission signals are fed to both two antennas at the same time. In **FIG. 17**, the antenna select circuit **41** of the antenna peripheral circuit **4** shown in **FIG. 1** is omitted, and impedance matching circuits **42**, **43** are connected directly to the controller **3**. Accordingly, transmission signals are fed to both the antennas **1**, **2** via the impedance matching circuits **42**, **43** through the controller **3** at the same time, and reception signals from both the antennas **1**, **2** are fed to the controller **3**. Thereby, both the antennas **1**, **2** are used as antennas for transmission and reception.

[0088] **FIG. 18** is a view showing a further embodiment of a communication system with a radio guidance antenna. In **FIG. 18, a** transmission signal is fed only to an antenna selected by the antenna select circuit **41**, and a reception signal only from the selected antenna is made effective. Therefore, control signals are added between the control circuit **31** and the antenna select circuit **41** while otherwise the system is the same as that shown in **FIG. 1**. Thereby, both the antennas **1**, **2** can be used as antennas for transmission and reception.

[0089] **FIG. 19** is a block diagram showing a still further embodiment of a communication system with a radio guidance antenna. In the embodiment shown in **FIG. 19, a** transmission signal is fed only to antenna **1** and a reception signal is fed only from antenna **2**, such that antenna **1** is used exclusively for transmission and antenna **2** is used exclusively for reception. Therefore, the output of the amplifier circuit **35** of the controller **3** is connected to the impedance matching circuit **42** of the antenna peripheral circuit **4**, and the output of the impedance matching circuit **43** is connected to the filter circuit **37** of the controller **3**.

[0090] **FIGS. 20A** to **20**C show examinations of an effect provided by the embodiment of the invention through calculation of electromagnetic-field intensity. **FIG. 20A** shows a configuration of a transmission antenna used in the examination. Substantially figure eight-shaped antennas indicated by thick lines are arranged on respective surfaces which face each other in a substantially portal-shaped manner, and have a similar configuration to the antenna **1** shown in the respective embodiments. Also, arrows shown inside the antennas indicate a direction of current at a certain point in time.

[0091] The magnetic-field intensity distribution shown in **FIG. 20B** illustrates components in a X-direction obtained by calculating a magnetic-field intensity distribution at a plane Z=0 when the signal electric power of 50 mW of a phase difference of 0° is fed to each of the substantially figure eight-shaped antennas with the conductor resistance value of the transmission antenna being 10 Ω.

[0092] Here, tags used in non-contact data communication apparatuses are capable of communication only when entering a region having generated a signal magnetic field of a constant intensity, and a minimum value of a magnetic-field intensity capable of communication is varied depending upon a configuration of a tag. More specifically, in the case where there is a tag, in which a minimum value of a magnetic-field intensity capable of communication is known, a curve drawn by a minimum value of a magnetic-field intensity generated by a transmission antenna can be immediately understood as a communication enabling region of a tag placed in parallel to a YZ plane. In the case where a tag can make communication at the magnetic-field intensity of, for example, 20 mA/m, close regions (dark shaded regions+hatched regions shown in **FIG. 20B**) surrounded by an outermost curve surrounding the antenna are made capable of communication. Thus the magnetic-field intensity distribution shown in **FIG. 20B** is one in the case where all the electric power is supplied to the first antenna. At this time, the antenna current assumes **70** mA.

[0093] The magnetic-field intensity distribution in **FIG. 20C** illustrates the case where a single induced antenna is not formed as in the earlier embodiments of the invention, but instead a plurality of antennas are arranged. In **FIG. 20**C, half of the signal electric power is taken by antennas other than the first antenna and only an electric power of 25 mW is fed to the first antenna. At such a time, the antenna current measures 50 mA. Regions capable of communication are sharply reduced as compared with the case shown in **FIG. 20B**. Since the magnetic-field intensity is in proportion to the antenna current, components in a Y-axis direction and components in a Z-axis direction are likewise reduced and so regions capable of communication are reduced.

[0094] As described above, an intense magnetic field can be generated with the same supply of electric power. Also, since all the electric power is supplied to the substantially figure eight-shaped antenna, the current flowing to the two loops defining the 8-shape is well balanced. That is, the remote electromagnetic-field intensity is much suppressed by the figure eight-shaped antenna, thus enabling an ideal radio guidance antenna capable of lessening an effect of interfering electromagnetic waves on other equipment.

[0095] As described above, according to the invention, the first antenna has at least two regions for generating lines of magnetic flux in reciprocal directions, and the second antenna has first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna, the second antenna being arranged to decrease the sum of mutual inductances between it and the first antenna. Doing so enables electric power to be efficiently converted to electromagnetic field with a simple construction and a remote electromagnetic-field intensity can also be suppressed to be small, so that it is possible to realize a radio guidance antenna, which is small-sized, lightweight and excellent in quality of communication.

[0096] Also, data are sent to the tag from one of the first and second antennas with electromagnetic induction, and the other of the first and second antennas receives data sent from the tag with electromagnetic induction, whereby electric power as supplied can be efficiently converted to electromagnetic field with a radio guidance antenna and data communication is enabled in a communication area in non-contact manner even when a tag is oriented in any direction.

[0097] It is to be understood that the embodiments disclosed herein are exemplary in all respects and not limitative. It is intended that the scope of the invention is defined not by the above explanation but by the claims and contains all modifications in the meaning and scope equivalent to the claims.

What is claimed as new and desired to be protected by Letters Patent of the United States is:

1. A radio guidance antenna comprising:

first and second antennas, wherein the first antenna has at least two regions for generating lines of magnetic flux in reciprocal directions, and the second antenna has first and second mutual inductances for generating induced electromotive forces in opposite directions due to electromagnetic induction from the first antenna, the second antenna being arranged so that the sum of mutual inductances between it and the first antenna is minimized.

2. The radio guidance antenna according to claim 1, wherein a difference in value between the first and second mutual inductances is equal to or less than one half of a self inductance of the first antenna.

3. The radio guidance antenna according to claim 1, wherein a difference in value between the first and second mutual inductances is equal to or less than one third of a self inductance of the first antenna.

4. The radio guidance antenna according to claim 1, wherein the first antenna comprises two or more antennas.

5. The radio guidance antenna according to claim 1, wherein the first and second antennas include feeding points provided in different positions, respectively.

6. The radio guidance antenna according to claim 1, wherein the first antenna is formed in a substantially figure eight shape in order to generate lines of magnetic flux in reciprocal directions.

7. The radio guidance antenna according to claim 6, wherein the second antenna is formed in a substantially figure eight shape and arranged in a position turned 90 degrees relative to the first antenna.

8. A method for data communication with an electronic tag in a non-contact manner using electromagnetic induction, comprising:

providing a radio guidance antenna including a first antenna having at least two regions for generating lines of magnetic flux in reciprocal directions and a second antenna having first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna;

arranging the second antenna so that the sum of mutual inductances between it and the first antenna is minimized; and

sending data to the tag from one of the first and second antennas with electromagnetic induction, and causing the other of the first and second antennas to receive data sent from the tag using electromagnetic induction.

9. A non-contact data communication apparatus for data communication with a tag in non-contact manner using electromagnetic induction, comprising:

a radio guidance antenna including a first antenna having at least two regions for generating lines of magnetic flux in reciprocal directions;

a second antenna having first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna, the second antenna being arranged so that the sum of mutual inductances between it and the first antenna is minimized; and

transmission means for sending data to the tag from either of the first and second antennas using electromagnetic induction.

10. A non-contact data communication apparatus for data communication with a tag in non-contact manner using electromagnetic induction, comprising:

a radio guidance antenna including a first antenna having at least two regions for generating lines of magnetic flux in reciprocal directions and a second antenna having first and second mutual inductances for generating induced electromotive forces in opposite directions due to an action of electromagnetic induction from the first antenna, the second antenna being arranged so that the sum of mutual inductances between it and the first antenna is minimized; and

receiver means for receiving data sent to the tag from either of the first and second antennas using electromagnetic induction.

11. The non-contact data communication apparatus according to claim 10, wherein the radio guidance antenna is arranged on a substrate and the transmission means or receiver means is also arranged on the same substrate.

12. A non-contact identification apparatus, comprising:

a first antenna having at least two regions for generating lines of magnetic flux in reciprocal directions,

a second antenna having first and second mutual inductances for generating induced electromotive forces in opposite directions due to electromagnetic induction from the first antenna,

a controller for managing communications between said first and second antennas and a host system, and

a tag having data storage capability responsive to said controller.

13. The apparatus of claim 12, wherein said controller further comprises:

a CPU, and

a carrier wave generating circuit, a modulation circuit, a demodulation circuit, and an amplifier circuit, all of which are responsive to said CPU.

14. The apparatus of claim 12, wherein said tag further comprises:

a control circuit; and

an antenna, a storage circuit, a modulation circuit, and an impedance matching circuit, all of which are responsive to said control circuit.

15. The apparatus of claim 12, wherein said first antenna further comprises upper and lower antenna conductors combining in a figure eight shape.

16. The apparatus of claim 15, wherein said first antenna receives power through a first feeding point.

17. The apparatus of claim 12, wherein said second antenna further comprises a single antenna conductor formed in a rectangular shape and located in the same plane as said first antenna.

18. The apparatus of claim 17, wherein said second antenna receives power through a second feeding point.

19. The apparatus of claim 12, wherein the residual mutual inductance between said first and second antennas is equal to or less than one third of the self inductance of said first antenna.

20. The apparatus of claim 12, wherein the signal electric power supplied to said first antenna is approximately twice the signal electric power supplied to said second antenna.

21. The apparatus of claim 12, wherein said first antenna further comprises a plurality of upper and lower antenna conductors each separately combining to form a figure eight shape.

22. The apparatus of claim 17, wherein said second antenna receives power through a receiver circuit.

23. The apparatus of claim 16, wherein said first antenna has an impedance of approximately 5 ohms and said first feeding point is connected to a coaxial cable having an impedance of 50 ohms.

24. The apparatus of claim 18, wherein said second antenna has an impedance of approximately 5 ohms and said second feeding point is connected to a coaxial cable having an impedance of approximately 50 ohms.

25. The apparatus of claim 12, wherein said first antenna is used exclusively for transmission while said second antenna is used exclusively for reception.

26. The apparatus of claim 12, wherein said first and second antennas are used both for transmission and reception.

27. A method of operating a non-contact identification device, comprising:

generating an induced electromagnetic force in an antenna belonging to a tag;

providing electric power to said tag;

relaying said electromagnetic force to a demodulator circuit through an impedance matching circuit;

demodulating said electromagnetic force,

decoding a data signal resulting from said demodulating, and

storing data from within said data signal into a storage circuit

* * * * *