

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number
WO 2005/104584 A1

(51) International Patent Classification⁷: **H04Q 7/32**,
H04B 1/38, G06K 19/077

(21) International Application Number:
PCT/EP2004/004191

(22) International Filing Date: 21 April 2004 (21.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicants (for all designated States except US): **TELECOM ITALIA S.P.A.** [IT/IT]; Piazza Degli Affari, 2, I-20123 Milano (IT). **PIRELLI & C. S.P.A.** [IT/IT]; Via G. Negri, 10, I-20123 Milano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BELLA, Valter** [IT/IT]; Telecom Italia S.p.A., Via G. Reiss Romoli, 274, I-10148 Torino (IT). **BOREAN, Claudio** [IT/IT]; Telecom Italia S.p.A., Via G. Reiss Romoli, 274, I-10148 Torino (IT). **CROZZOLI, Maurizio** [IT/IT]; Telecom Italia S.p.A., Via G. Reiss Romoli, 274, I-10148 Torino (IT).

DISCO, Daniele [IT/IT]; Telecom Italia S.p.A., Via G. Reiss Romoli, 274, I-10148 Torino (IT). **TAMBOSSO, Tiziana** [IT/IT]; Telecom Italia S.p.A., Via G. Reiss Romoli, 274, I-10148 Torino (IT).


(74) Agents: **BATTIPEDE, Francesco** et al.; Pirelli & C. S.p.A., Viale Sarca, 222, I-20126 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: SUBSCRIBER IDENTIFICATION CARD PERFORMING RADIO TRANSCEIVER FUNCTIONALITY FOR LONG RANGE APPLICATIONS

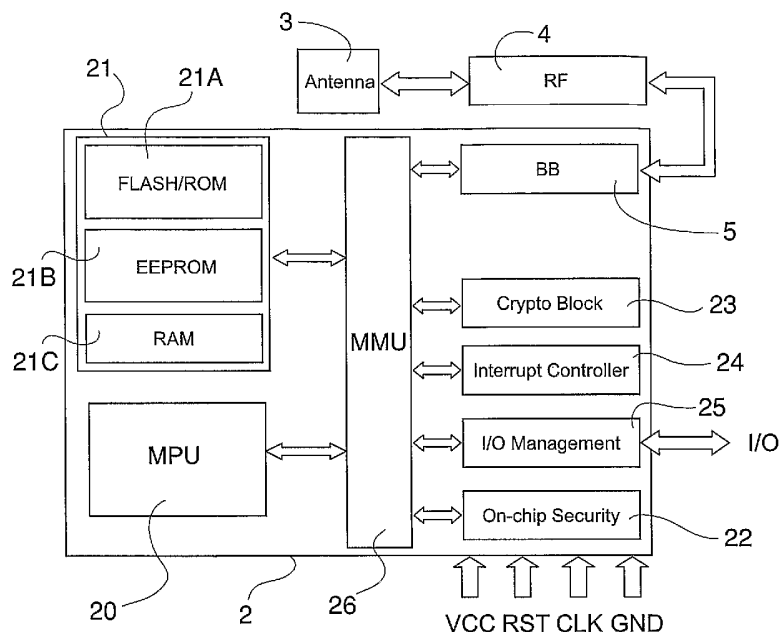

(57) Abstract: A subscriber identification card performing radio transceiver functionality for long-range applications (1) incorporates a radio transceiver (3, 4, 5) including an antenna (3) formed on a card surface, an RF module (4) and a base-band module (5). The antenna (3) and the transceiver (4) operate in the microwave/millimetre waves frequency range: this allows meeting the dimensional constraints imposed by the plug-in size and attaining a long-range operation. At least the base-band module (5) might be integrated within the same chip (2) executing standard security related functions for the terminal.



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD,*

SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SUBSCRIBER IDENTIFICATION CARD PERFORMING RADIO TRANSCEIVER FUNCTIONALITY FOR LONG RANGE APPLICATIONS

Field of the invention

5 The present invention refers to subscriber identification card performing radio transceiver functionality for long-range applications, and to a mobile terminal including said card.

Background of the Invention

Subscriber identification cards such as SIM (Subscriber Identity Module) or
10 USIM (UNIVERSAL SIM) cards are a kind of integrated circuit card used, among others, in mobile terminals. Similar subscriber identification cards can be used, for example, in user terminals connected to a wired network, such as a wide area network (WAN), a local area network (LAN) or a telephone line. The integrated circuit of a subscriber identification card is substantially a micro-controller, with
15 memory areas for programs and data (in particular information characterising a user), and a processing unit entrusted with the execution of a number of security-related functions (such as user authentication and communication encryption).

At present, such subscriber identification cards are generally provided in two standard sizes: full-sized (or ISO-sized) cards have the size of a conventional
20 credit card, whereas plug-in sized cards are much smaller and are about 25 mm long, 15 mm wide and 1 mm thick. Plug-in sized cards are generally used in the most recent mobile telephones, whose reduced sizes are incompatible with a full-sized card. Standardisation of an even smaller size (e.g. 3FF-third Form Factor-card) is in progress.

25 Several proposals exist for incorporating contactless functionalities into a SIM card.

US-A 2003/085288 discloses a plug-in module for contactless transactions detachably connected to an external antenna. The antenna is formed by a wire, a printed line of conductive ink or a conductive strip and is applied onto a full-sized
30 card holding the plug-in module and carried by the mobile terminal. The antenna is a low frequency antenna, suitable only for short-range communication (typically 80 cm - 1 m), and it is not integrated onto the plug-in module.

EP-A 820178 discloses a cellular telephone incorporating the electronics for implementing both a cellular telephone function and a contactless card function.
35 The antenna for the contactless card function is an inductive antenna, which only

CONFIRMATION COPY

permits short-range communication. The antenna and the contactless card are not integrated with the SIM card of the cellular telephone, even if some of the contactless card control functions can be performed by the SIM processor.

JP-A 2002-236901 discloses a plug-in sized SIM card having also the possibility of contactless interaction with the telephone, in case the usual contact interaction is not operative. To this end the card integrates an antenna, which however is suitable only for connection inside the telephone, that is over a range of a few centimetres at most. The telephone body includes a second antenna for contactless transactions managed by the SIM card, yet such an antenna is a coil-type antenna allowing only short-range operation.

AU-B 736350 discloses a SIM card, preferably of the full-size type, integrated with a coil-type antenna for RF communication with an external device. Communication with the external device requires a dedicated integrated circuit, connected with the antenna, separate from the integrated circuit devoted to the SIM functions. The coil antenna is suitable only for short-range operation.

WO-01/80193 discloses a cellular telephone with a SIM card having also the functions of a contactless transaction card for RF communication with an external device. Even if the details of the antenna are not disclosed, the document repeatedly states that the card is intended only for short-range communication.

In summary, all prior art proposals for providing the SIM card of a mobile terminal with contactless functions, only disclose the possibility of operating at short distance from the mobile terminal. This represents an undesirable limitation in the possibility of future applications of portable devices.

It is an object of the present invention to provide a subscriber identification card with an antenna and the circuitry necessary to establish a long-range radio connection.

Summary of the Invention

According to the invention, such an object is achieved by means of a subscriber identification card equipped with radio transceiver circuitry and for long range applications. The invention is characterised in that, in order to achieve long-range operation, said radio transceiver operates in the microwave/millimetre wave frequency range (0.3 GHz - 300 GHz).

Use of a radio chain operating in the microwave/millimetre wave frequency range allows operating with far lower powers and over longer distances than attainable by conventional techniques (e.g. RFID and e-tag systems) while

meeting the dimensional constraints imposed by a plug-in card size.

Brief description of the drawings

- Further objects, characteristics and advantages of the invention will become apparent from the following description of a preferred embodiment, given by way of non-limiting example and illustrated in the accompanying drawings, in which:
- Figs. 1A and 1B show a SIM card equipped with a radio transceiver, seen from the contact side and from the antenna side, respectively;
 - Figs. 2A and 2B show a mobile telephone equipped with the SIM card according to the invention;
 - 10 - Fig. 3 is a general block diagram of the circuitry of the SIM card according to the invention;
 - Fig. 4 is a schematic cross-sectional view of the SIM card of Fig. 3;
 - Figs. 5 and 6 are enlarged views of a detail of the SIM card, showing examples of the connection between the antenna and the RF module;
 - 15 - Figs. 7 and 8 are functional block diagrams of two possible embodiments of the SIM card chip;
 - Fig. 9 is a possible layout of the antenna;
 - Fig. 10 is a diagram of the reflection coefficient of the antenna shown in Fig. 9;
 - Figs. 11 and 12 are schematic illustrations of two exemplary situations of use of a mobile terminal equipped with the SIM card of the invention; and
 - 20 - Fig. 13 shows a variant embodiment of the SIM card of the invention and its arrangement within a cellular phone.

Description of the preferred embodiment

Referring to Figs. 1A and 1B, there is provided a subscriber card, e.g. a plug-in sized SIM card 1, incorporating a microwave/millimetre wave (0.3 GHz - 300 GHz) RF transceiver chain comprising an antenna 3 and the whole circuitry necessary to implement a radio transceiver for long range operation. Figs. 1A and 1B show a single-chip card, in which the same microchip performs both radio transceiver functions and conventional functions required in a mobile communication system. The Figure shows contacts 11 of the microchip, which is not visible being embodied in card 1. The antenna is formed on the plane opposite to the plane of contacts 11, as shown in Fig. 1B and as it will be discussed in further detail below.

Card 1 has to maintain its standard size and shape notwithstanding the additional functions: thus it can be introduced in a mobile terminal, e. g. a cellular

telephone 100, in place of any conventional plug-in sized SIM card, as shown in Figs. 2A and 2B. The addition of radio transceiver functions also has to leave unchanged all conventional SIM card functions related to mobile communications (identification, security, encryption, services provided by the operator...).

5 A general block diagram of the SIM card 1 according to the invention is shown in Fig. 3, where reference 10 denotes the whole of the electronic circuitry of the card. The conventional SIM card functions related to mobile communications are incorporated in microchip 2. As far as the wireless functions are concerned, circuitry 10 comprises an RF module or transceiver 4 coupled with antenna 3 and
10 a module 5 for processing the base-band signals. Module 5 also contains a microprocessor with the related management and control software for the transceiver functions. Base-band module 5 is connected through a proper interface 6 to chip 2 of the SIM card. For sake of clarity, the components added for performing the transceiver functions have been shown separated from chip 2 in
15 block 10.

The radio circuitry of the SIM card can operate either in time-division duplexing (TDD), i. e. transmission and reception use a same frequency but occur at different instants, or in frequency-division duplexing (FDD) operation, i. e. different frequencies are used for the two directions of communications. In the
20 former case, a switch is needed, whereas in the latter case it will be sufficient to connect a duplexer to antenna 3.

Fig. 4 is a longitudinal sectional view through card 1. The elements already disclosed in Fig. 3 are denoted by the same reference numerals. Like in Fig. 3, the additional circuit components performing the radio transceiver functions are shown
25 as elements distinct from chip 2. As shown, such components are located in card portions not occupied by chip 2. Contacts 11 of chip 2 are formed on lower surface 12 of card 1 (contact plane), with reference to the drawing. Antenna 3 is a printed antenna, for example a patch antenna. It comprises a dielectric substrate 30, of which one surface (the bottom surface, which in the finished card is embedded in
30 the card itself) is completely metallised and forms a ground plane 31, whereas the upper surface, which in the finished card forms the outer card surface opposite to the contact area of chip 2, bears one or more radiators 32.

Forming antenna 3 on the card surface opposite to contact plane 12 results in an optimum exploitation of the available surface in the card and takes advantage
35 of the presence of ground plane 31 to shield the circuits in block 10 from the

electromagnetic signals emitted by the same antenna 3.

With the construction shown, electrical coupling of antenna radiator 32 with transceiver 4 requires crossing ground plane 31. The techniques used for manufacturing printed circuit boards can be advantageously exploited to make said
5 coupling. For example, as shown in Fig. 5, connection is established through a metallised hole 33 (a so-called via-hole), around which a small metallisation annulus 31A is eliminated in ground plane 31 to avoid short-circuits between hole 33 and the ground plane itself. Once the level of component plane 13 is attained, a suitable conductive line 14 connects via-hole 33 to the transceiver.

10 An electromagnetic coupling through an aperture 34 in ground plane 31 could be used as well, as shown in Fig. 6, for connecting antenna plane to signal processing circuitry plane (see "Microstrip Antennas" ed. D.M. Pozar and D.H. Schaubert, IEEE press NJ 1995, pp. 331, 421).

Radiofrequency module 4, base-band module 5 and interface 6 may be part
15 of one or more additional chips, which is or are embedded within the card in the same manner as chip 2. However, as shown in Figs. 1A and 1B, they may be integrated into chip 2 to form a single-chip card. The latter solution avoids unnecessary duplications of memories and processors and could be optimised in terms of electromagnetic compatibility.

20 Figs. 7 and 8 show two possible organisations of the chip of the SIM card according to an embodiment of the invention, corresponding to two different degrees of integration of the transceiver functions into chip 2 performing the conventional SIM card functions.

Microprocessor unit (MPU) 20, memory area 21 including a FLASH/ROM
25 (program memory) 21A, an EEPROM (user memory) 21 B and a RAM 21C, on-chip security module 22, block 23 performing cryptographic functions, interrupt controller 24 and I/O management module 25 are the conventional functional modules of any SIM card chip. All the above mentioned units are interconnected through a memory management unit (MMU) 26. Also indicated are the usual pins
30 for I/O signals, the power supply (VCC), the ground voltage (GND) and the reset and the clock signals RST, CLK.

Fig. 7 assumes that transceiver module 4 is external to the SIM and is connected with base-band processing module 5 which is internal to chip 2. Base-band processing module 5 has access to microprocessor 20 and memory block 21
35 through memory management unit 26. In Fig. 8, also transceiver 4 is internal to

chip 2 and it is connected to the antenna contacts through the via-hole 33 or the electromagnetic coupling 34 shown in Figs. 5 and 6.

As said, partial or complete integration of the transceiver functions into chip 2 allows using microprocessor 20 and memories 21 also for such functions.

Moreover, the wireless communication can take advantage of the security and information encryption functions conventionally provided by the SIM card.

However, even when base-band module 5 is external to chip 2, the microprocessor-based control and management tasks of the transceiver might be shared between such module and SIM microprocessor 20, or yet be completely implemented by the latter, instead of being wholly implemented in the same chip as module 5.

In order to attain a long-range operation while meeting the size constraints imposed by a plug-in sized SIM card, the transceiver operates in the microwave /millimetre wave frequency range (0.3 GHz - 300 GHz).

In fact, let us consider the following equation linking gain G of an antenna to its equivalent area A_{eq} (substantially related to the geometrical area of the antenna):

$$A_{eq} = \frac{\lambda^2}{4\pi} G \quad (1)$$

where $\lambda = c/f$ is the wavelength corresponding to the frequency used and c is the speed of light. Equation (1) shows that, by increasing the frequency, the same gain can be obtained with smaller geometrical size of the antenna. This is important for the aims of the invention, where severe size constraints exist and a reduced transmitted power is important.

Hereinafter, reference will be made by way of non-limiting example to a frequency of 5.8 GHz, which is the highest frequency range presently reserved to industrial, scientific and medical (ISM) applications. Moreover, we will assume a desired operating range of 20 m.

In order to determine the antenna gains and transceiver powers involved in a typical radio link between two wireless systems, the following well known transmission equation is considered:

$$P_R = P_T + G_T + G_R + A_{FS} \quad (2)$$

where P_R and P_T are the received and transmitted powers (dB) respectively, G_R and G_T (dB) are the antenna gains at both ends of a connection with length d , and A_{FS} (dB) is the free space attenuation, given by:

7

$$A_{FS} = 20 \log_{10} \left(\frac{4\pi d}{\lambda} \right) \quad (3)$$

For sake of simplicity we will assume that the transceivers at both ends of the connection are identical, i.e. are capable of emitting the same maximum power in transmission and have the same receiver sensitivity, and that the antenna gains

5 G_T and G_R , on both sides of the link, are the same.

Let us consider a receiver sensitivity $P_R = -65$ dBm and a couple of antennas with equal gain $G = 3$ dBi, which value is compatible with the present technologies for manufacturing patch antennas sufficiently small to be applied onto a plug-in sized SIM card. For the above mentioned frequency and operating range, A_{FS} is

10 73,73 dB. Under such conditions, the necessary power to be delivered by the transmitter is $P_T = +2,73$ dBm, which is achievable with state of the art integrated transceiver devices.

Notwithstanding the long operation range, the power levels concerned are quite low (e.g. 10 - 100 mW). Taking into account that great attention is to be paid

15 to the aspects concerning the safety and the health of the operators working in close vicinity of frequently interrogated terminals, it is clear that the present invention is quite satisfactory also as far as safety and health aspects are concerned.

An important aspect for the system construction is the design of the antenna,

20 which has to take into account both the geometrical constraints imposed by the plug-in sized SIM card and the operating frequency of the system, the choice of which is strictly related to the physical size of the antenna, as shown by equation (1). In case a patch antenna is used, for operation at above frequency of 5.8 MHz, an antenna element 32 with the layout shown in Fig. 9 is suitable. Element 32

25 comprises a square or rectangular microstrip patch 32A and a microstrip line 32B which partly extends into the area delimited by patch 32A, from which it is separated by slits 32C. Via-hole 33, if provided, opens near the free end of line 32B. The skilled in the art has no problem in determining the antenna parameters for the desired operating frequency. For instance, for operation at the above

30 mentioned frequency of 5,8 GHz, microstrip patch 32A has an antenna-feed side of 14 mm and the other side of 14.46 mm.. Microstrip line 32B has a width of 1.8 mm and extends inside patch 32A by 5,23 mm. The dielectric substrate is 0.762 mm thick and its dielectric constant is 3.26.

Fig. 10 shows a diagram of the absolute value of the input reflection

coefficient of an antenna like that shown in Fig. 9, having the sizes mentioned above. The amplitude (in dB) is plotted in the ordinates and the frequency (in GHz) in the abscissas. The resonance centred at 5.8 GHz is clearly apparent.

An operating frequency equal to or higher than 1 GHz can be anyway
5 preferable, mostly due to design constraints in dimensioning the antenna, as well as an upper limit of 100GHz is preferably set in order to maintain the complexity and the cost of the transceiver under satisfactory limits.

A similar design can be carried out at relatively high frequencies, e.g. 60 GHz, resulting in a smaller size antenna. A plurality of smaller size antennas can
10 be arranged to form a single array antenna.

If an array antenna is employed, an operating frequency equal to or higher than 10 GHz can be preferable, due to design constraints in dimensioning the single antennas forming the array. Again, an upper limit of 100 GHz in the operating frequency of the transceiver is useful for maintaining complexity and cost
15 under preferred levels.

A wide range of applications can be envisaged for the disclosed system. Such applications can be based on a point-to-multipoint or a point-to-point configuration. The two possibilities are shown in Figs. 11 and 12, respectively,

In Fig. 11, a mobile terminal 100, including a subscriber card according to the
20 invention, communicates with a number of simpler components 101a, 101b...101n such as active RFID tags (see standard for Real Time Locating Systems of INCITS T20 371.1-371.2-371.3) located at relatively long distance from terminal 100, e.g. 5 to 20 m. A configuration of that kind can be used for instance for a service in which mobile terminal 100, equipped with the SIM card according to the invention,
25 identifies one or more of active RFID tags 101a...101n through the respective code (for instance, the well known Electronic Product Code, see EPC Global standard). By accessing through the mobile communication network (e.g. GSM, GPRS, UMTS...), schematised by 102, a server 103 located anywhere, the terminal uses the code to recover or supply information related to the "object" to which the RFID
30 tag is affixed. The service may be automatically managed by the terminal or provided upon user's request.

A typical service of this kind could be the provision of tourist information and the like.

In a first example, the active RFID tags could be affixed to monuments,
35 pictures in a gallery and so on. Terminal 100, when the monument, picture or the

like is in the reach of antenna 3, reads the code of tag 101. Through the mobile communication network, terminal 100 can access remote databases storing detailed information about the monument, picture ... and provide the user with the requested information, e.g. through the loudspeaker or the display. In this way a
5 sort of "virtual guide" is obtained.

In another example, the active RFID tags are affixed outside restaurants, cinemas, shops ... This service is similar to that described above: reading the code on a tag 101 allows access to a set of specific information (the menu, the movie showings...), which in part is carried by the active RFID tag and in part is
10 accessible through the communications network 102. Updating of information on the active RFID tags could take place from a remote centre, for instance via the web.

It is to be appreciated that such applications are attractive just because the user has no need to very closely approach the monument, restaurant, shop...
15 He/she can get the information when he/she is in the most comfortable or convenient position for him/her.

Another example of application of the point-to-multipoint configuration is surveillance. The active RFID tags are affixed to the sites to be monitored, and the surveillance people are equipped with a device 100 according to the invention.
20 Through the communication of the subscriber card realised according to the present invention with the active RFID tags, surveillance people can directly communicate checked locations to the control centre 103. The operators at the control centre can thus verify that the required schedule is observed and that no unexpected delay occurs etc. The communication can occur through the mobile
25 network, as before. Conversely, at each check, the surveillance people could write information into active RFID tags 101 for log purposes..

A further application of the point-to-multipoint configuration is in the logistics field: a device 100 according to the invention can be used to identify and track objects in a store, through the long-distance reading of active RFID tags 101
30 affixed to the objects. The system also allows writing the active RFID tags with the product codes when a good is entered into the store. Thus, a direct management of the store is possible. The system is attractive over the present systems based on bar codes, in that remote and contactless reading and writing of the active RFID tags is possible. Also, simultaneous reading of a plurality of active RFID tags is
35 possible: to this end, the processing circuitry in the SIM will implement anti-

collision algorithms.

In the case of point-to-point configuration, shown in Fig. 12, communication is established for instance between two mobile terminals 100a, 100b each equipped with the SIM card of the invention. Such a configuration can be used
5 when a controlled access or a toll access exists requiring a data exchange, possibly bi-directional, between an access gate and the terminal that has to pass through the gate. Communication between the two terminals 100a, 100b can also exploit the mobile communication network (not shown).

A typical example of such application is the execution of monetary
10 transactions, for instance for payment of a purchased object, of the parking etc. Especially in the latter case, the long-range operation is particularly attractive, in that the user does not have to search for or to very closely approach the parking meter, but he/she can perform the transaction from his/her car.

Moreover, in case of the point-to-point configuration, the invention can also
15 represent a communication interface between two mobile terminals for long-range data exchange: such interface could represent an alternative to the infrared communication port with which many mobile terminals are equipped.

A problem that could arise when employing SIM card 1 of the invention in a cellular phone is represented by location of SIM card 1 within the phone. Indeed, a
20 very common location for the SIM card housing, hereinafter referred to as "shuttle", is just below the battery. Therefore the battery is almost in contact with SIM card 1 and certainly affects the radiation of SIM antenna 3. Taking into account that no constraints exist for the shapes, sizes and positions of the batteries of the cellular phones, designing antenna 3 so that its operation is scarcely affected by the
25 battery is a difficult task.

This problem can be solved as shown in Fig. 13. Here, the elements already shown in the previous Figures are denoted by the same reference numerals with the addition of a prime. Reference numerals 40, 41 denote the battery and the SIM card shuttle of a cellular phone in which SIM card shuttle 41 is located below
30 battery 40. According to the invention, SIM card 1' is located above battery 40 or, more generally, in a position where the antenna operation is not affected by the battery itself. To allow the proper co-operation between the SIM chip and contacts 42 conventionally provided on the shuttle wall, the SIM chip, instead of being provided with the usual contacts 11 (Figs. 1A, 1B), has its inputs connected to a
35 connector 43, e.g. a set of conductors, ending at contacts 44 provided in a dummy

SIM card 45 housed in shuttle 41, which contacts 44 co-operate with telephone contacts 42.

The above solution could entail some modification of certain types of commercially available cellular phones. For instance, if shuttle 41 does not allow
5 the passage of connector 43, it should be replaced by a new one having a hole for the passage of such connector. Similarly, if the distance between the cover of the battery housing (not shown) and battery 40 is not sufficient for the insertion of SIM card 1', the cover should be replaced by a modified one suitably shaped so as to provide room for SIM card 1'.

10 Moreover, SIM card 1' with the radio transceiver functionalities can be manufactured in the most suitable size (for instance, the plug-in size) independently of the possible evolutions of the standards, which, as known, tend towards a greater and greater miniaturisation, and the size standards will have to be met by dummy SIM card 45.

15 The above-described invention affords important and attractive features. We may mention:

- compactness and miniaturisation of the transceiver;
- greater independence of the card manufactures from the mobile terminal manufacturers;
- 20 - communication security;
- extension of SIM functionalities (including that of e.g. RFID tag reader/writer) ;
- possibility of application in all situations in which a long-range operation is an essential and distinctive factor.
- possibility of application in all situations in which a low transmitted power, in the
25 microwave frequency range, is a key factor in order not to generate noises and interferences to existing systems both inside the mobile telephone (e.g. Bluetooth®) and outside it (e.g. wi-fi, see IEEE802.11a, b).

It is evident that the above description has been given only by way of non-limiting example and that changes and modifications are possible without
30 departing from the scope of the invention.

Thus, even if reference has been made in the example to an operation frequency of a few GHz, higher frequencies of some tens GHz, e.g. 10 to 100 GHz and above, could be employed. In such case it is possible to integrate onto the SIM card a patch antenna array. The manner in which this can be made is known
35 in the art.

It is clear that the subscriber identification card object of the present invention can be used for any contactless transaction where the long-range of operation is an important requirement: this only entails a proper design of base-band circuitry 5. It should also be appreciated that the term "SIM card", as used throughout the specification, is intended to include also the USIM (UNIVERSAL SIM) card of the UMTS user equipment as well as any smart card used in a mobile terminal and having a chip for performing communication functions for said terminal in a mobile communication system.

Patent Claims

1. A subscriber identification card (1) for a user terminal (100; 100a, 100b), which card (1) is equipped with a chip (2) for performing security-related functions for said user terminal (100; 100a, 100b) in a communication system and with a
5 radio transceiver (3, 4, 5) including an antenna (3) and circuitry (4, 5) performing wireless functionalities independently of the communication system, characterised in that, in order to achieve long-range operation, said radio transceiver (3, 4, 5) operates in the microwave/millimetre wave frequency range.
2. A subscriber identification card (1) as claimed in claim 1, characterised
10 in that said antenna (3) is a printed antenna formed onto a card surface.
3. A subscriber identification card (1) as claimed in claim 1 or 2, characterised in that said antenna (3) is formed onto a card surface opposite to a plane on which contacts of said chip (2) lie.
4. A subscriber identification card (1) as claimed in claim 3, characterised
15 in that said antenna (3) comprises at least one ground plane (31) for shielding circuitry (2, 4, 5, 6) from electromagnetic signals emitted by the same antenna.
5. A subscriber identification card (1) as claimed in claim 1, characterised in that said radio transceiver (3, 4, 5) operates in a frequency band included in the range from 1 GHz to around 100 GHz.
- 20 6. A subscriber identification card (1) as claimed in claim 5, characterised in that said antenna (3) includes a single printed radiating element (32).
7. A subscriber identification card (1) as claimed in claim 6, characterised in that said radio transceiver (3, 4, 5) operates in a frequency band centred on 5.8 GHz.
- 25 8. A subscriber identification card (1) as claimed in claim 5, characterised in that said antenna (3) includes an array of printed radiating elements.
9. A subscriber identification card (1) as claimed in claim 8, characterised in that said radio transceiver (3, 4, 5) operates in a frequency band included in the range from 10 GHz to around 100 GHz.
- 30 10. A subscriber identification card (1) as claimed in claim 9, characterised in that said radio transceiver chain (3, 4, 5) operates in a frequency band centred on 60 GHz.
11. A subscriber identification card (1) as claimed in any preceding claim, characterised in that said radio transceiver (3, 4, 5) comprises a RF module (4)
35 connected with said antenna (3) and a base-band signal processing circuit (5).

12. A subscriber identification card (1) as claimed in claim 11, characterised in that said RF module (4) and said base-band signal processing circuit (5) are implemented on one or more integrated circuits distinct from said chip (2).

13. A subscriber identification card (1) as claimed in claim 12, characterised
5 in that said processing circuit (5) has access to processing, memory and security modules (20 - 23) in said chip (2) and co-operates therewith for at least a part of the control and management functions and for security of the wireless communication functionalities.

14. A subscriber identification card (1) as claimed in claim 11, characterised
10 in that at least said base-band signal processing circuit (5) is integrated onto said chip (2) and uses processing, memory and security modules (20 - 23) in said chip (2) for the control and management functions and for security of the wireless communication functionalities.

15. A subscriber identification card (1) as claimed in any of claims 2 to 14,
15 characterised in that the or each radiating element (32) of the antenna (3) is connected with the integrated circuit including the RF module (4) through a via-hole (33) crossing a ground plane (31) of the printed antenna (3), and a conductive line (14) on a component plane (13) of the card (1).

16. A subscriber identification card (1) as claimed in any of claims 2 to 14,
20 characterised in that the or each radiating element (32) of the antenna (3) is electromagnetically coupled to a conductive line (14) on a component plane (13) of the card (1), where the integrated circuit including the RF module (4) is placed, through an aperture (34) in a ground plane (31) of the antenna (3).

17. A subscriber identification card (1) as claimed in any preceding claim,
25 characterised in that it is the SIM (Subscriber Identity Module) or USIM (UNIVERSAL SIM) card of said mobile terminal (100; 100a, 100b).

18. A subscriber identification card (1) as claimed in claim 17, characterised in that it is a plug-in sized card.

19. A subscriber identification card (1) as claimed in claim 17, characterised
30 in that it is a Third Form Factor (3FF) card.

20. A subscriber identification card (1) as claimed in claim 17, characterised in that said chip (2) has input/output pins connected to a connector (43) ending at a dummy card (45) provided with contacts (44) for co-operation with matching contacts (42) provided in the terminal (100; 100a, 100b), so that said SIM or USIM
35 card is located in position where said antenna (3) is at least partially unshielded by

a power source (40) or other electro-magnetically shielding elements of the mobile terminal (100; 100a, 100b).

21. A mobile communication terminal (100; 100a, 100b) including the subscriber identification card (1) integrated with a radio transceiver (3, 4, 5) for
5 execution of wireless communication functionalities as claimed in any preceding claim.

22. A mobile communication terminal (100; 100a, 100b) as claimed in claim 21, characterised in that said subscriber identification card (1) is the SIM or USIM card of said terminal (100; 100a, 100b).




Fig. 1A

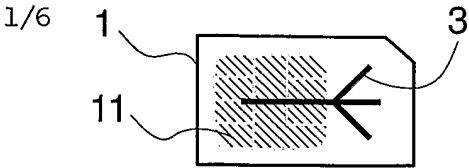


Fig. 1B

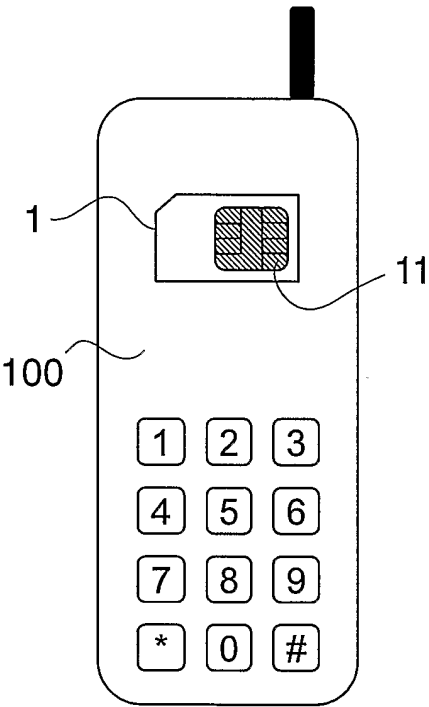


Fig. 2A

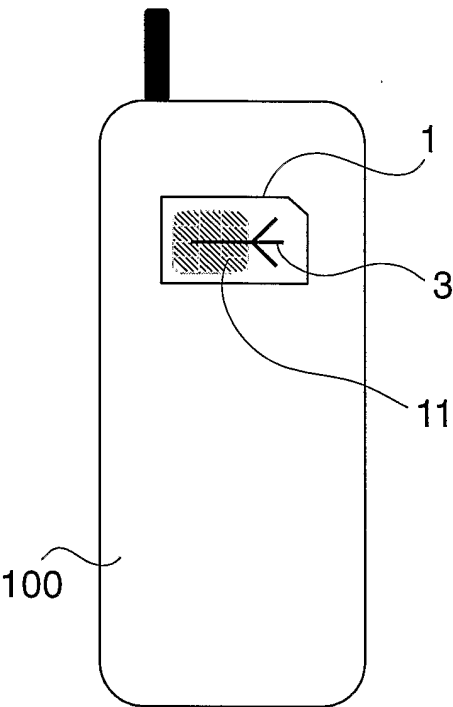


Fig. 2B

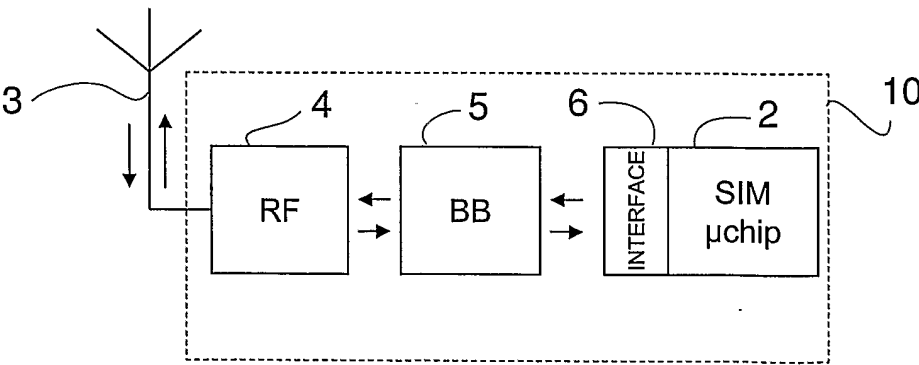


Fig. 3

2/6

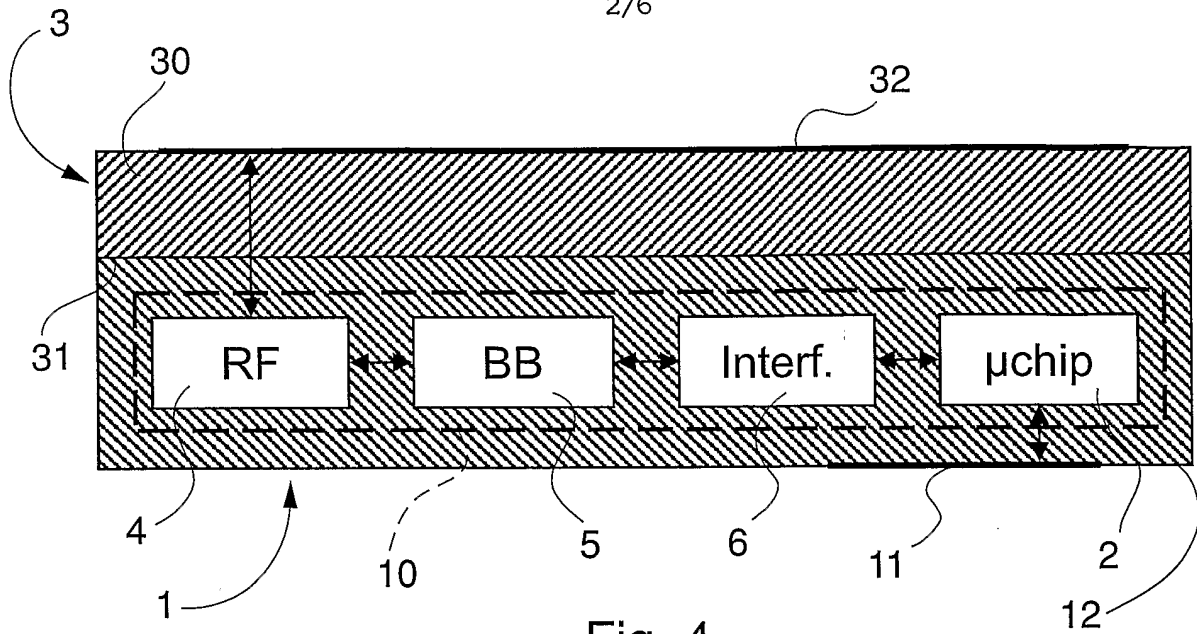


Fig. 4

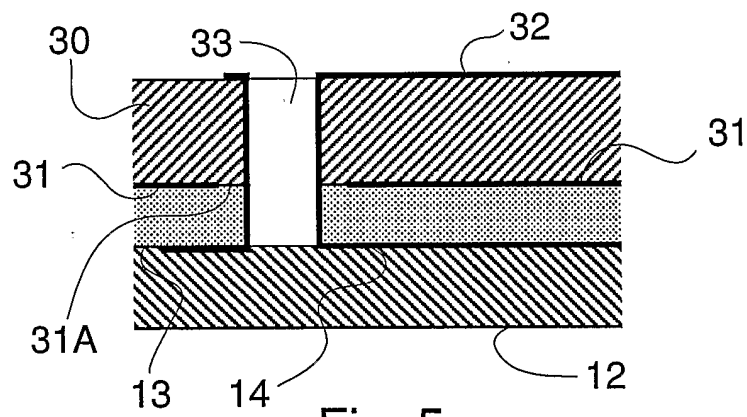


Fig. 5

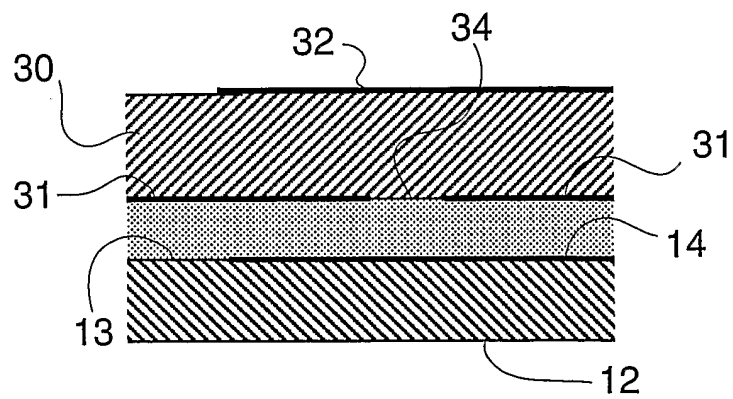


Fig. 6

3/6

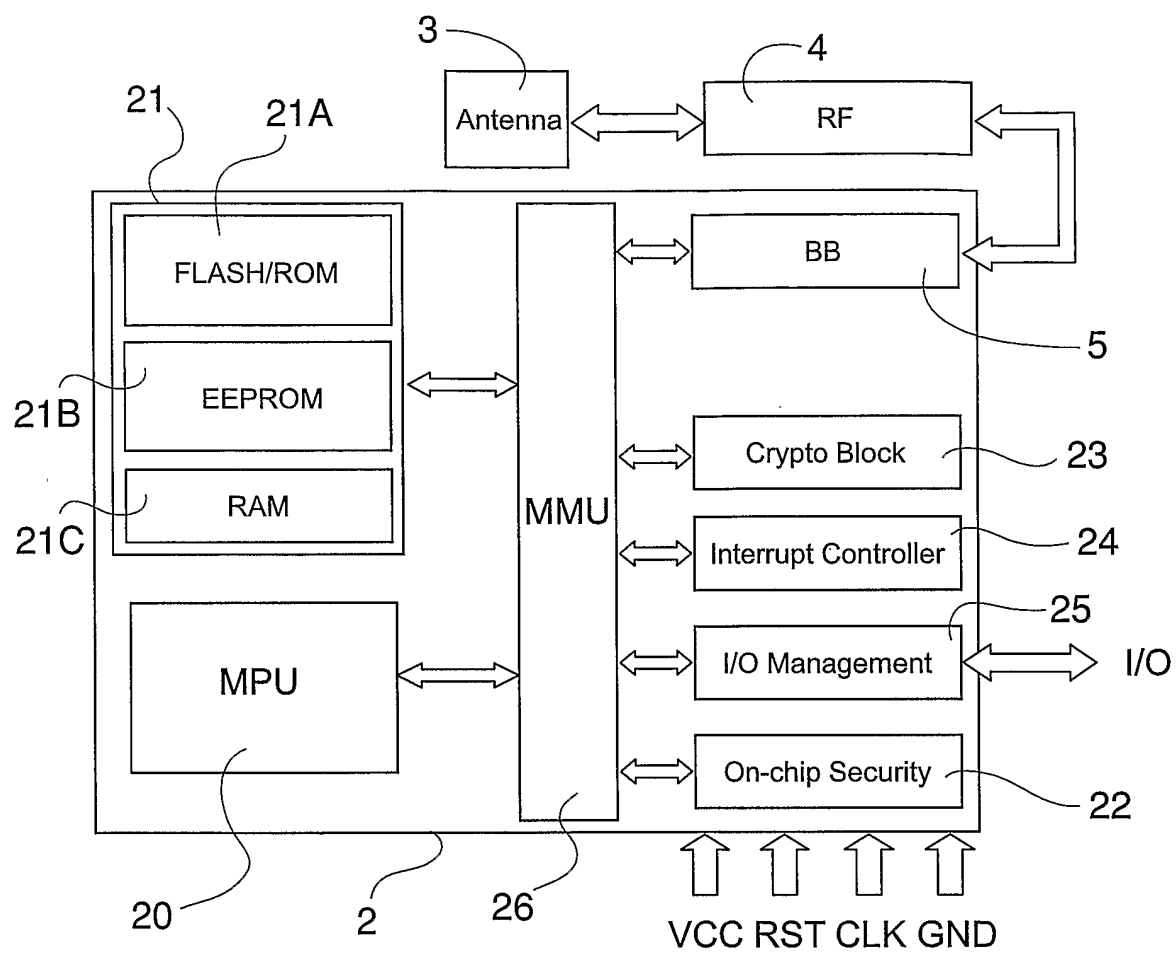


Fig. 7

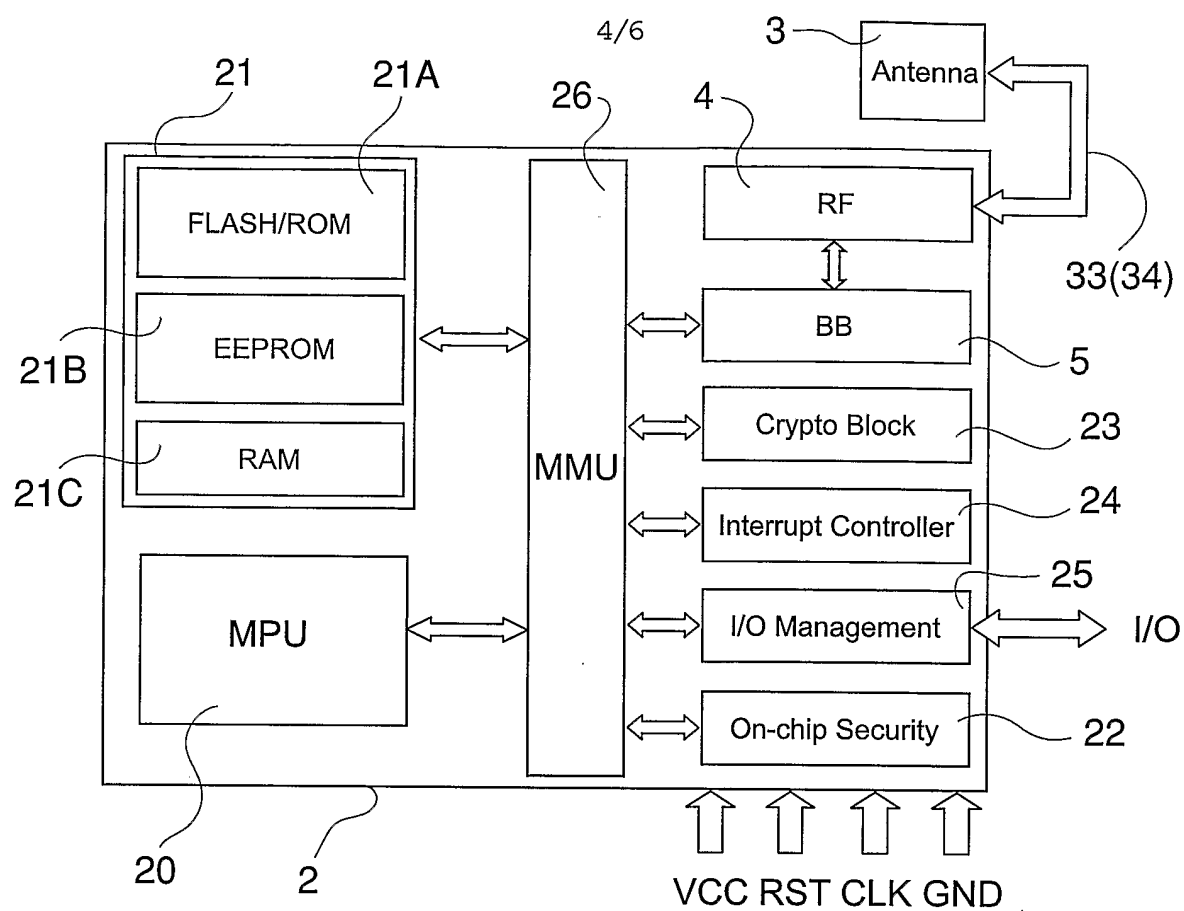


Fig. 8

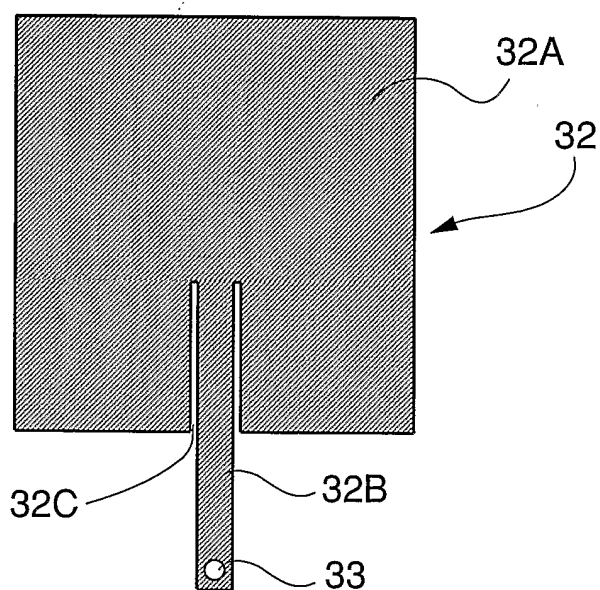


Fig. 9

5/6




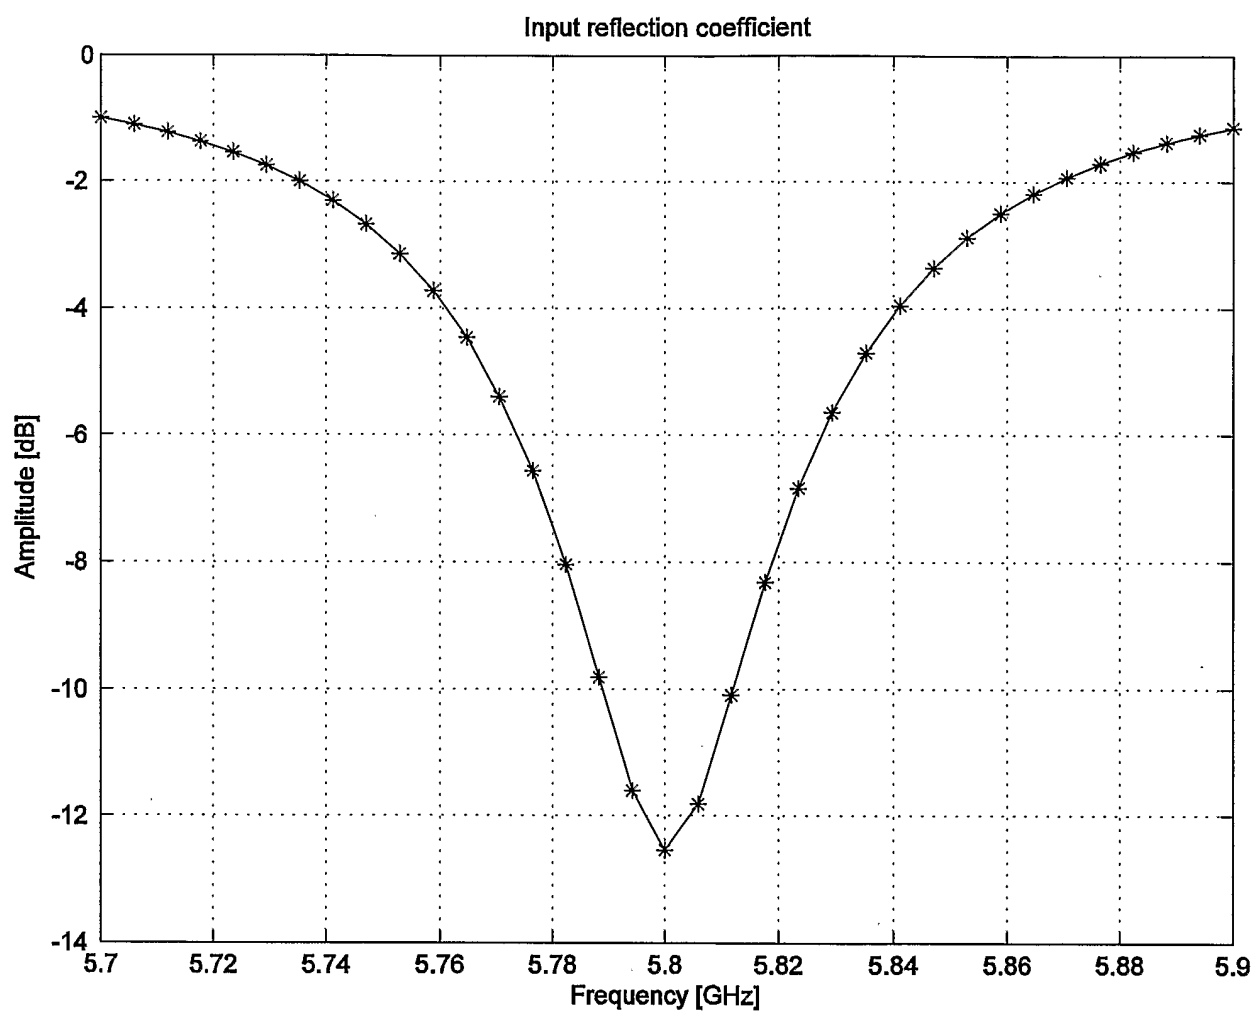


Fig. 10

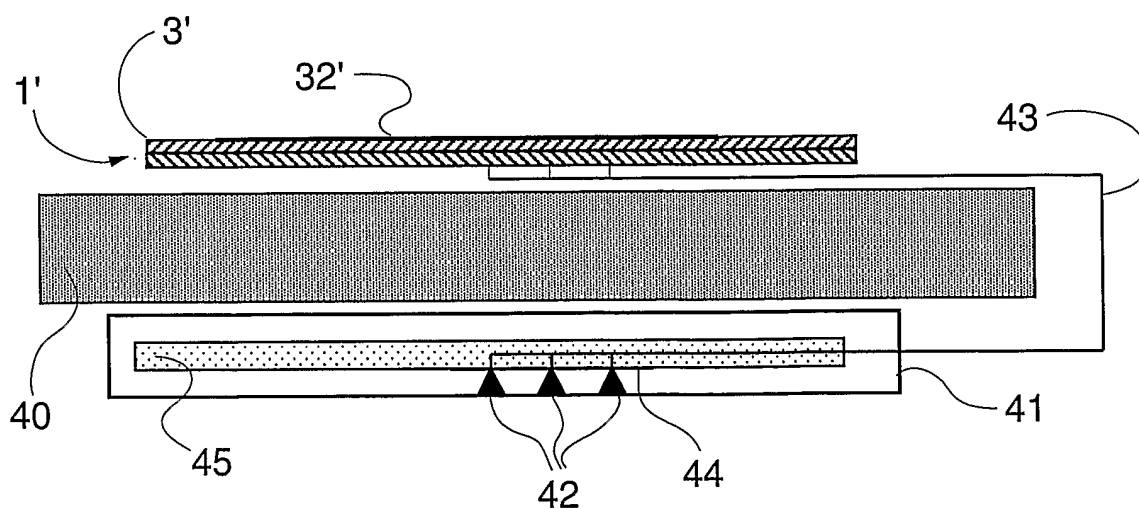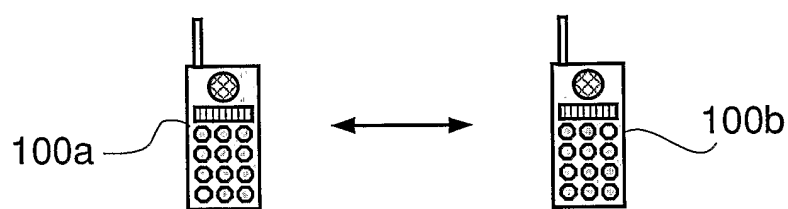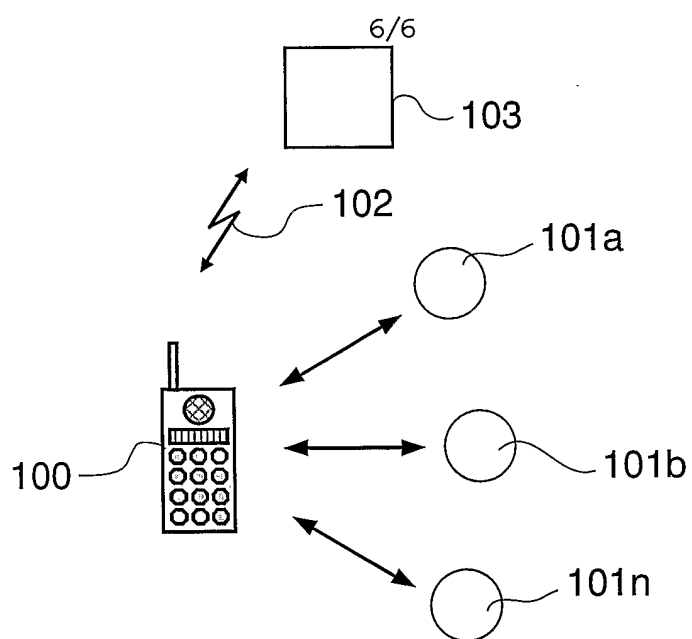

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/004191

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/32 H04B1/38 G06K19/077

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04B G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99/59360 A (ERICSSON TELEFON AB L M) 18 November 1999 (1999-11-18)	1, 5, 7, 13, 14, 17, 21
Y	abstract page 2, line 6 - line 10 page 4, line 11 - line 16 page 10, line 1 - line 39 page 12, line 22 - page 13, line 2 page 14, line 9 - page 15, line 17 figures 3-5 ----- -/--	2-4, 8-12, 15, 16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

3 January 2005

Date of mailing of the international search report

10/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Rosenauer, H

INTERNATIONAL SEARCH REPORT

ational Application No
PCT/EP2004/004191

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 820 178 A (MOTOROLA INC) 21 January 1998 (1998-01-21) column 3, line 5 - line 27 column 3, line 55 - line 58 column 4, line 10 - line 41 figures 2,3 -----	11
Y	EP 1 365 353 A (QUADNOVATION INC) 26 November 2003 (2003-11-26) abstract column 2, line 5 - line 24 column 3, line 8 - line 20 column 4, line 40 - line 45 column 7, line 16 - line 27 -----	2
Y	US 2002/175669 A1 (SLETTEN ROBERT JOHN ET AL) 28 November 2002 (2002-11-28) page 1, paragraph 6 - paragraph 7 page 6, paragraph 88 - page 7, paragraph 91 figures 3,4 -----	3,4, 8-10,12, 15,16
A	WO 99/26197 A (BASHAN ODED ; GILBOA RONNIE (IL); ADUK MOSHE (IL); ITAY NEHEMYA (IL);) 27 May 1999 (1999-05-27) page 2, line 10 - line 28 page 7, line 22 - page 8, line 16 page 9, line 24 - page 10, line 27 figures 2,5 -----	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/004191

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9959360	A	18-11-1999	SE 514433 C2	26-02-2001
			AU 757268 B2	13-02-2003
			AU 4304399 A	29-11-1999
			BR 9910273 A	02-01-2001
			CA 2332029 A1	18-11-1999
			CN 1143576 C	24-03-2004
			EE 200000656 A	15-04-2002
			EP 1077008 A1	21-02-2001
			ID 27602 A	12-04-2001
			JP 2002515710 T	28-05-2002
			NO 20005641 A	08-11-2000
			RU 2217883 C2	27-11-2003
			SE 9801612 A	09-11-1999
			WO 9959360 A1	18-11-1999
			US 6615057 B1	02-09-2003
EP 0820178	A	21-01-1998	US 5943624 A	24-08-1999
			EP 0820178 A2	21-01-1998
			JP 10098542 A	14-04-1998
EP 1365353	A	26-11-2003	US 2003085288 A1	08-05-2003
			CA 2411309 A1	06-05-2003
			CN 1472698 A	04-02-2004
			EP 1308886 A2	07-05-2003
			EP 1365353 A2	26-11-2003
			JP 2003223628 A	08-08-2003
			JP 2004005678 A	08-01-2004
			US 2003213849 A1	20-11-2003
			US 2004129785 A1	08-07-2004
US 2002175669	A1	28-11-2002	NONE	
WO 9926197	A	27-05-1999	IL 122250 A	31-07-2003
			AU 1051099 A	07-06-1999
			CA 2310680 A1	27-05-1999
			EP 1036373 A1	20-09-2000
			WO 9926197 A1	27-05-1999
			US 6719206 B1	13-04-2004