US010145098B2

(12) **United States Patent**
Brown et al.

(10) **Patent No.: US 10,145,098 B2**
(45) **Date of Patent: Dec. 4, 2018**

(54) **URINAL SCREENS**

(71) Applicant: **Fresh Products, Inc.**, Toledo, OH (US)

(72) Inventors: **Douglas S. Brown**, Toledo, OH (US); **Jeffrey A. Smith**, Perrysburg, OH (US)

(73) Assignee: **FRESH PRODUCTS, INC.**, Toldeo, OH (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/925,369**

(22) Filed: **Oct. 28, 2015**

(65) **Prior Publication Data**

US 2016/0122992 A1 May 5, 2016

Related U.S. Application Data

(60) Provisional application No. 62/075,827, filed on Nov. 5, 2014.

(51) **Int. Cl.**
E03D 9/00 (2006.01)
E03D 13/00 (2006.01)

(52) **U.S. Cl.**
CPC ***E03D 13/005*** (2013.01); ***E03D 9/00*** (2013.01); ***E03D 9/007*** (2013.01)

(58) **Field of Classification Search**
USPC 4/256.1, 300.3
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

333,935 A 1/1886 Duncan
555,888 A 3/1896 Roberts
810,973 A 1/1906 Pattenden et al.
927,026 A * 7/1909 Clayton E03D 13/00 210/499
950,574 A 3/1910 Morgan
1,109,904 A 9/1914 Dahlgren
1,208,675 A 12/1916 Sleight
1,260,082 A 3/1918 Sleight
1,292,856 A 1/1919 Niblo
1,731,431 A 10/1929 Meyer
1,880,962 A 10/1932 Koppelman
1,886,676 A 11/1932 Heuacker
(Continued)

FOREIGN PATENT DOCUMENTS

DE 1915249 A1 10/1970
DE 19541911 A1 5/1997
(Continued)

OTHER PUBLICATIONS

Dugdale, David C., "Uroflometry" MedlinePlus Medical Encyclopedia, 2008. http://www.nlm.nih.gov/medlineplus/ency/article/003325.htm, retrieved on Oct. 28, 2014, 2 pages.
(Continued)

Primary Examiner — Lauren Crane
(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson & Bear LLP

(57) **ABSTRACT**

A urinal assembly having a frame and a plurality of posts or posts extending from the frame. The frame can include a plurality of openings. The openings can be defined by a plurality of sides and corners. The posts can extend from the corners and/or from the sides of the openings. In some embodiments, posts extend from a first face and a second face of the frame.

55 Claims, 6 Drawing Sheets

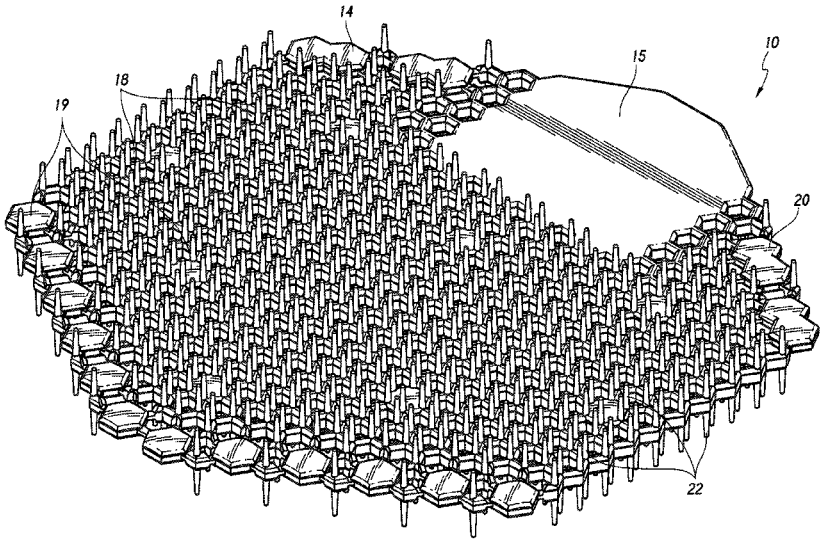

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,935,128 A 11/1933 Pullman
2,011,732 A 8/1935 Saeks
2,020,864 A 11/1935 Aronson et al.
2,087,592 A 7/1937 Chesnut
2,211,970 A 8/1940 Fischer
2,233,234 A 2/1941 Wilson
2,447,178 A 8/1948 Hatchette
2,506,669 A 5/1950 Heuacker
2,508,808 A 5/1950 Warman
2,679,054 A 5/1954 Singleton
2,690,569 A 10/1954 Kozerski
2,931,047 A 4/1960 Stebbins
2,984,841 A 5/1961 Wilson
3,170,169 A 2/1965 Clark
3,237,330 A 3/1966 Dinstbir
3,248,740 A 5/1966 Wisnom
3,268,920 A 8/1966 Beer
3,329,998 A 7/1967 Stohr
3,387,069 A 6/1968 Stohr
3,422,558 A 1/1969 Fee
3,540,433 A 11/1970 Brockman
3,597,772 A 8/1971 Leavitt et al.
3,614,790 A 10/1971 Billingsly et al.
3,631,560 A 1/1972 Atkins
3,723,998 A 4/1973 Wehr
3,752,121 A 8/1973 Brazzell
3,760,429 A 9/1973 Brownstein
3,788,485 A 1/1974 Bruning
3,804,796 A 4/1974 Alexandre
3,824,633 A 7/1974 Van Vlahakis
3,837,988 A 9/1974 Hennen et al.
3,867,953 A 2/1975 Stohr
3,899,192 A 8/1975 Reddaway
3,923,442 A 12/1975 Stohr
3,935,602 A 2/1976 Kale
4,010,497 A 3/1977 Menter et al.
4,095,031 A 7/1978 Engle
4,103,367 A 8/1978 Kaufer
D255,744 S 7/1980 Dekko
4,212,153 A 7/1980 Kydonieus et al.
4,215,443 A 8/1980 Babik
D258,181 S 2/1981 Adam
D258,472 S 3/1981 Adam
4,305,216 A 12/1981 Skelton
4,361,606 A 11/1982 Butler et al.
4,389,963 A 6/1983 Pearson
4,405,509 A 9/1983 Rogers et al.
4,408,557 A 10/1983 Bradley et al.
4,418,432 A 12/1983 Vidal
4,440,542 A 4/1984 Foley
4,490,862 A 1/1985 Vidal
4,515,909 A 5/1985 Sarwano et al.
D280,267 S 8/1985 Bryant et al.
4,549,693 A 10/1985 Barlics
4,557,863 A 12/1985 Callewaert et al.
4,574,400 A 3/1986 Annowsky
4,574,403 A 3/1986 Dintemann et al.
4,604,357 A 8/1986 Callenwaert et al.
4,612,676 A 9/1986 Whitman
4,671,976 A * 6/1987 Vidal A47K 1/14 4/286
4,750,219 A 6/1988 Williams
4,761,437 A 8/1988 Christie
4,815,767 A 3/1989 Lambert
4,830,407 A 5/1989 Sadler, Jr. et al.
4,866,793 A 9/1989 Luedtke et al.
4,941,688 A 7/1990 Jones
4,985,940 A 1/1991 Jones
5,010,599 A 4/1991 Nilsson
5,019,434 A 5/1991 Matsumoto
5,058,088 A 10/1991 Haas et al.
5,058,523 A 10/1991 Mikkonen et al.
5,087,273 A 2/1992 Ward
5,117,515 A 6/1992 White, Jr. et al.
5,130,016 A 7/1992 Gavin
5,139,864 A 8/1992 Lindauer
D329,893 S 9/1992 Luedtke et al.
5,150,481 A 9/1992 Pang
5,150,722 A 9/1992 Rutherford
5,165,119 A 11/1992 Yamato
5,188,755 A 2/1993 Chang
D341,414 S 11/1993 Baker
5,309,578 A 5/1994 Temple, Sr.
5,313,672 A 5/1994 Luedtke et al.
5,336,424 A 8/1994 Van Vlahakis et al.
5,364,132 A 11/1994 Haas et al.
5,365,616 A 11/1994 Morad
5,377,362 A 1/1995 Jackson
5,398,347 A 3/1995 Luedtke et al.
5,472,712 A 12/1995 Oshlack et al.
5,479,735 A 1/1996 Martin, Jr.
5,482,007 A 1/1996 Kumlin
5,489,415 A 2/1996 Van Vlahakis et al.
5,496,300 A 3/1996 Hirsch et al.
D370,938 S 6/1996 Roach
5,556,685 A 9/1996 Swicegood, Jr.
5,580,578 A 12/1996 Oshlack et al.
5,604,937 A 2/1997 Davenport
5,639,476 A 6/1997 Oshlack et al.
5,660,138 A 8/1997 Hirsch
5,719,828 A 2/1998 Haas et al.
D393,896 S 4/1998 Wagner et al.
5,774,905 A 7/1998 Wager et al.
5,809,590 A 9/1998 Williams et al.
5,813,058 A 9/1998 Quigley et al.
5,867,848 A 2/1999 Ort
5,885,701 A 3/1999 Berman et al.
5,958,334 A 9/1999 Haddon
5,961,148 A 10/1999 Cheng
D422,061 S 3/2000 Lee
6,055,681 A 5/2000 Lyons
D427,295 S 6/2000 Wagner
6,079,975 A 6/2000 Conover
6,081,937 A 7/2000 Whitacre
6,103,201 A 8/2000 Green
6,103,351 A 8/2000 Ram et al.
6,113,148 A 9/2000 Koranda et al.
D438,710 S 3/2001 Chen
6,207,236 B1 3/2001 Araki et al.
6,213,409 B1 4/2001 Warren et al.
D442,246 S 5/2001 McCabe et al.
6,244,208 B1 6/2001 Qui et al.
6,265,084 B1 7/2001 Stickler
6,279,759 B1 8/2001 Weisback
D456,492 S 4/2002 Lourens
6,370,705 B1 4/2002 Levinson
D464,122 S 10/2002 Mangan
6,517,759 B1 2/2003 Ferenc et al.
6,640,350 B1 11/2003 Deutsch
6,698,035 B1 3/2004 Grueser
6,703,012 B1 3/2004 White
6,730,311 B2 5/2004 Maleeny et al.
6,787,210 B2 9/2004 Stickler
6,823,533 B2 11/2004 Casari
6,862,754 B1 3/2005 DeMarco
6,920,648 B1 7/2005 Suski et al.
6,927,199 B2 8/2005 Takemura et al.
6,988,462 B1 1/2006 Zhu
D520,610 S 5/2006 Wrate
7,061,831 B2 6/2006 De La Huerga
D528,193 S 9/2006 Lee
7,127,844 B2 10/2006 Collins
7,202,201 B1 4/2007 Williams
D561,327 S 2/2008 DeJonge et al.
7,413,082 B2 8/2008 Adler et al.
7,419,588 B2 9/2008 Lawson
7,434,535 B2 10/2008 Adamy
D598,075 S 8/2009 Uhl
7,742,367 B2 6/2010 Haas
7,808,861 B2 10/2010 Wien
7,904,972 B2 3/2011 Anderson
7,921,479 B2 4/2011 Hunter
7,921,583 B2 4/2011 Londino
D639,410 S 6/2011 Ramirez

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,043,498	B2	10/2011	Rueda
D678,482	S	3/2013	Williams
D678,483	S	3/2013	Barker
D682,398	S	5/2013	Lee
D687,524	S	8/2013	Heiser
D687,525	S	8/2013	Heiser
8,856,977	B2	10/2014	Ramirez
9,243,394	B2	1/2016	Brown et al.
D778,411	S	2/2017	Brown et al.
D778,412	S	2/2017	Brown et al.
2003/0044326	A1	3/2003	Yamasaki et al.
2005/0022298	A1	2/2005	De Leon et al.
2005/0067106	A1	3/2005	Melges
2005/0112339	A1	5/2005	Sandel et al.
2005/0144711	A1	7/2005	Valadez et al.
2005/0169793	A1	8/2005	Wheatley et al.
2005/0245671	A1	11/2005	Moon et al.
2005/0283892	A1	12/2005	Simeone et al.
2006/0232059	A1	10/2006	Fortune et al.
2007/0023539	A1	2/2007	Brown et al.
2007/0039089	A1	2/2007	Worrel
2007/0161927	A1	7/2007	Daugirdas
2007/0186337	A1	8/2007	Emr
2008/0098505	A1	5/2008	Casari
2008/0100057	A1	5/2008	MacPhee
2008/0292509	A1	11/2008	D'Amico
2009/0070923	A1	3/2009	Ruedas
2009/0229511	A1	9/2009	Campbell et al.
2009/0255053	A1	10/2009	Cutrone, III
2010/0183694	A1	7/2010	Burke et al.
2013/0067651	A1	3/2013	Brown et al.
2014/0007336	A1	1/2014	Mills et al.
2014/0157501	A1*	6/2014	D'Amico E03D 13/005 4/256.1
2014/0259344	A1*	9/2014	Muderlak E03D 13/005 4/256.1
2016/0102451	A1	4/2016	Brown et al.
2018/0023278	A1	1/2018	Brown et al.

FOREIGN PATENT DOCUMENTS

FR	2681232	A1	3/1993
GB	189518394	A	8/1896
GB	2431101	A	4/2007
JP	57-17599		1/1982
JP	60-178497		11/1985
JP	60-190865		12/1985
JP	63-116585		7/1988
JP	1990-102625	A	4/1990
JP	1992-119880	U	10/1992
JP	2001-303642		10/2001
KR	0368846	U	11/2004
WO	WO 2016/060998	A1	4/2016

OTHER PUBLICATIONS

Gray, Henry. "The Male Urethra". Anatomy of the Human Body, 3b. 4, 1918. http://www.bartleby.com/107/256.html, retrieved on Oct. 27, 2014. 5 pages.

Ritter, R. C. et al., "Analysis of Drop Intervals in Jets Modelling Obstruction of the Urinary Tract," Physics in Medicine and Biology, 1974, vol. 19, No. 2, 161-170, 11 pages.

Ritter, R. C. et al., "Physical Information in the External Urinary Stream of the Normal and Obstructed Adult Male," British Journal of Urology, 1977, vol. 49, 293-302, 10 pages.

* cited by examiner

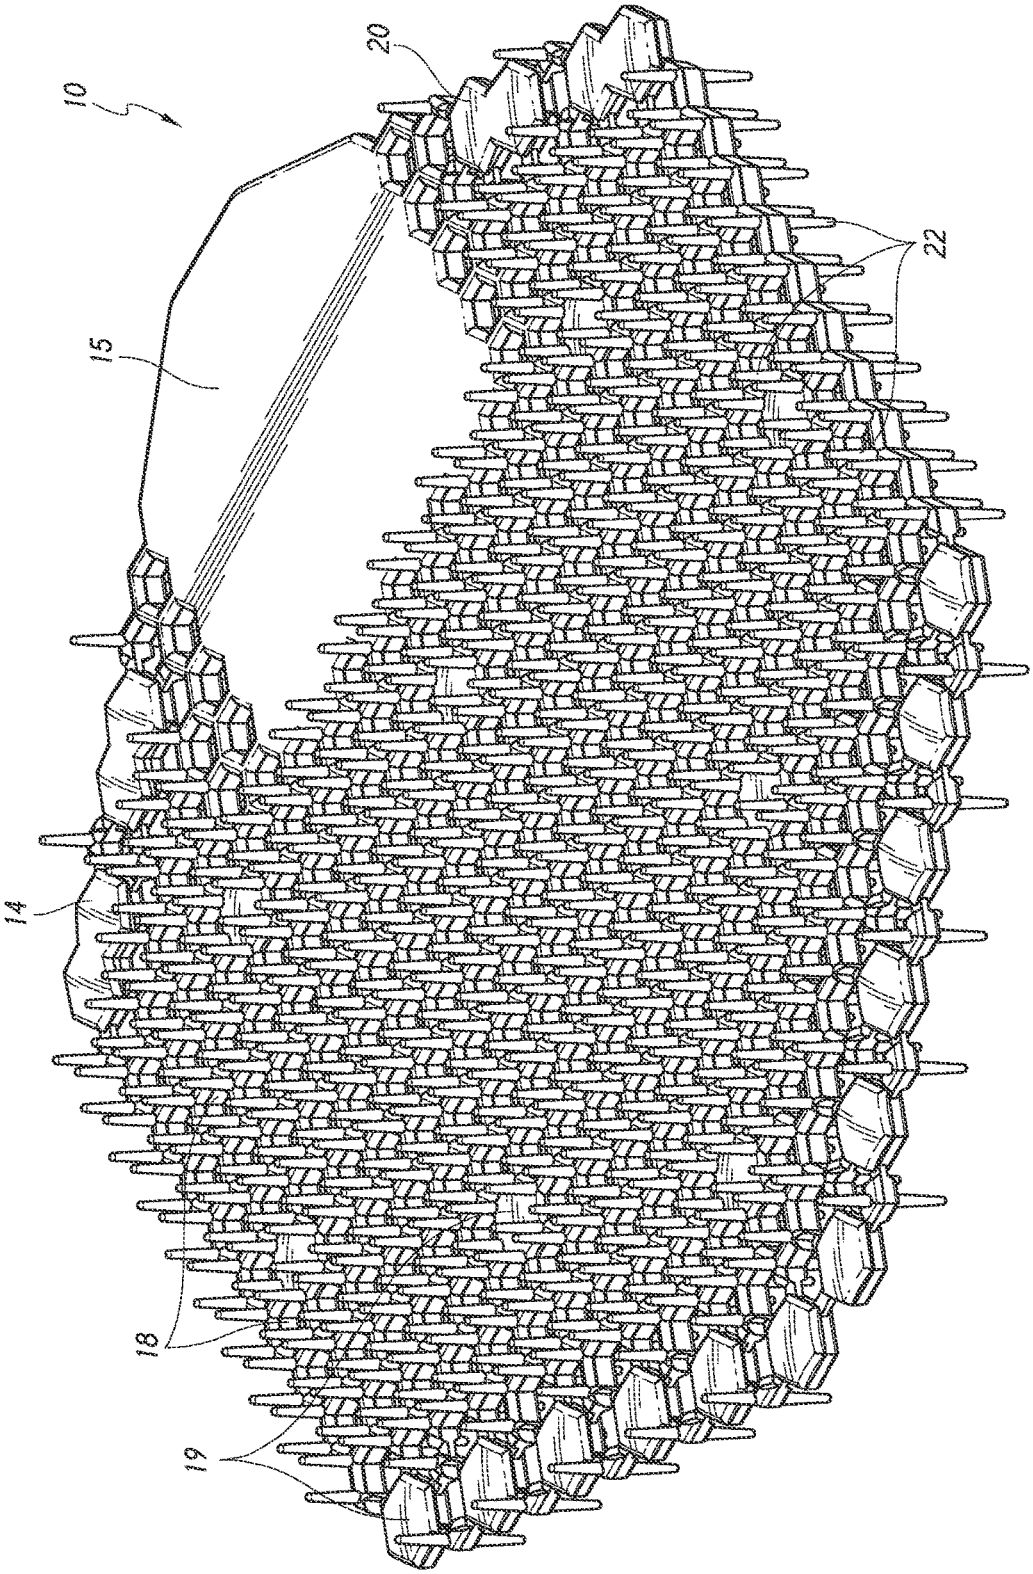

FIG. 1

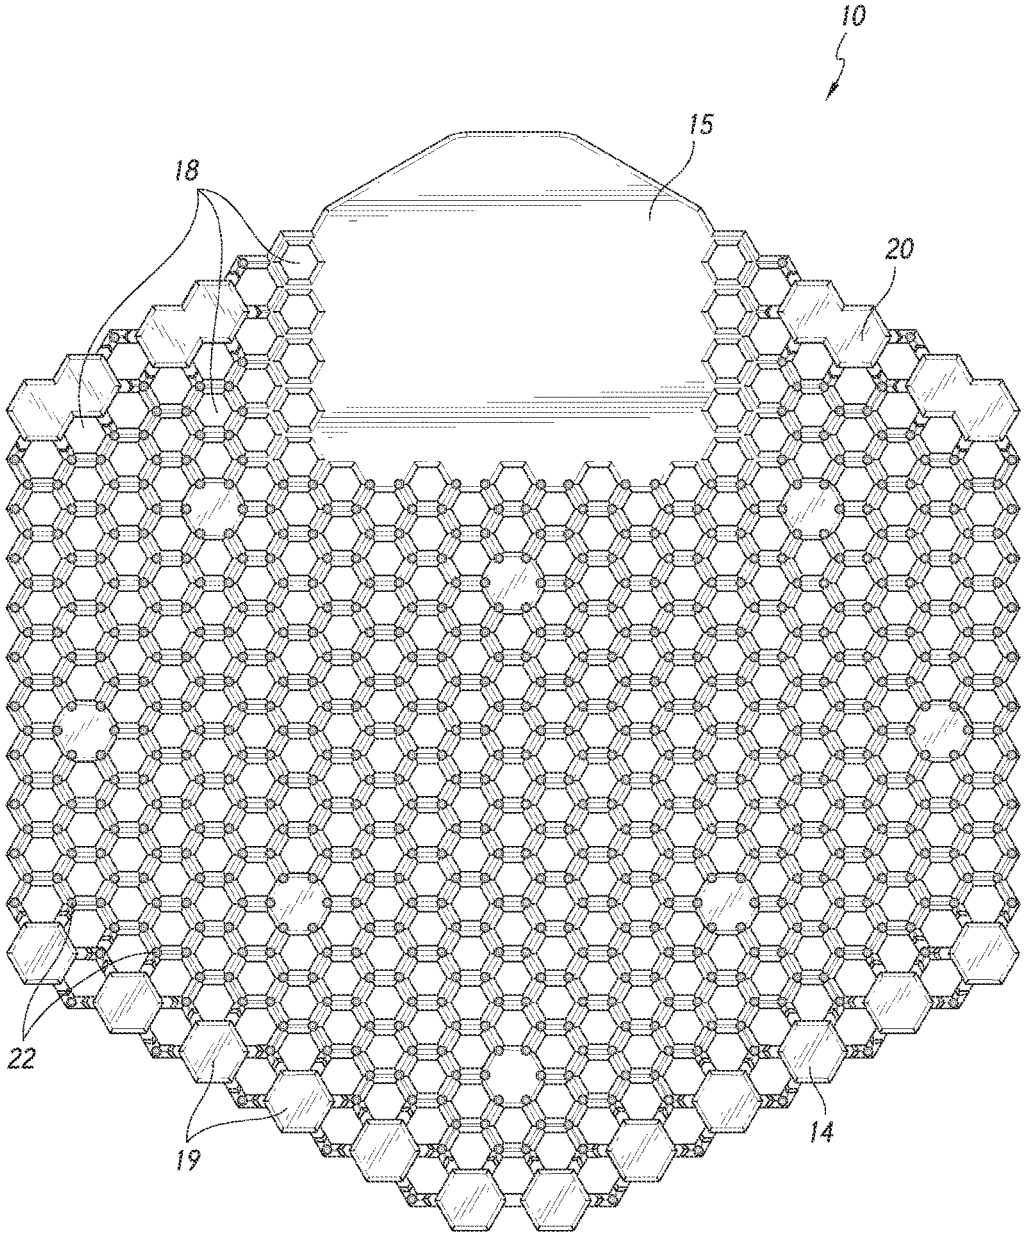

FIG. 2

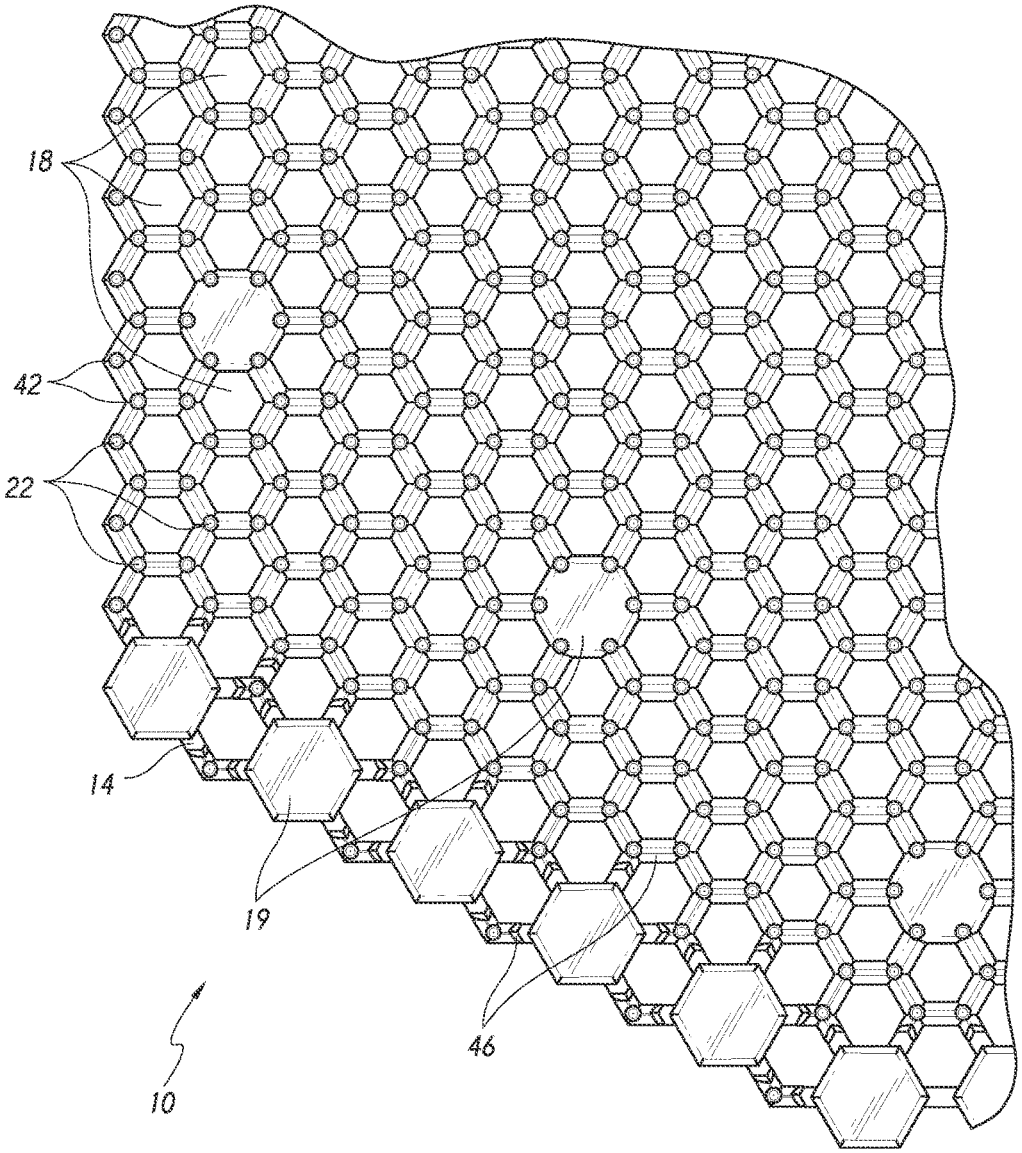

FIG. 3

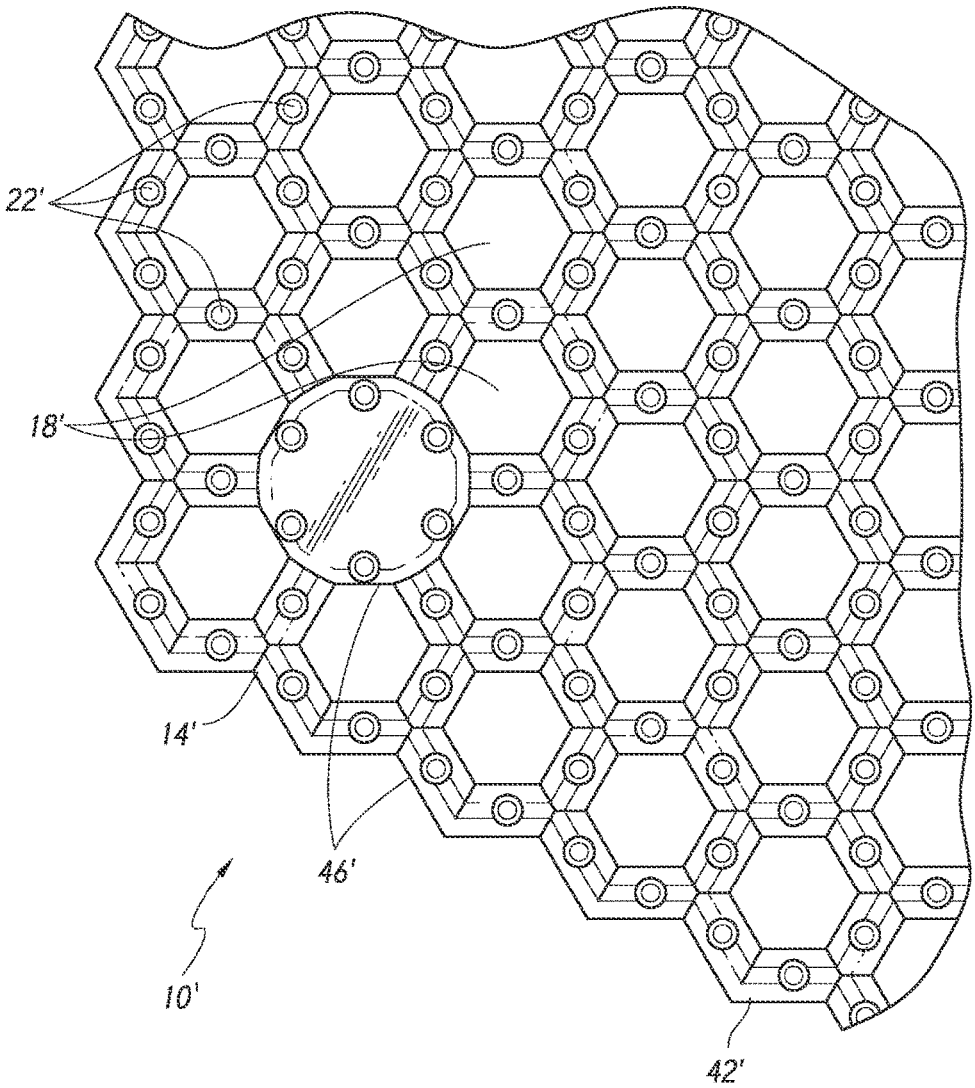

FIG. 4

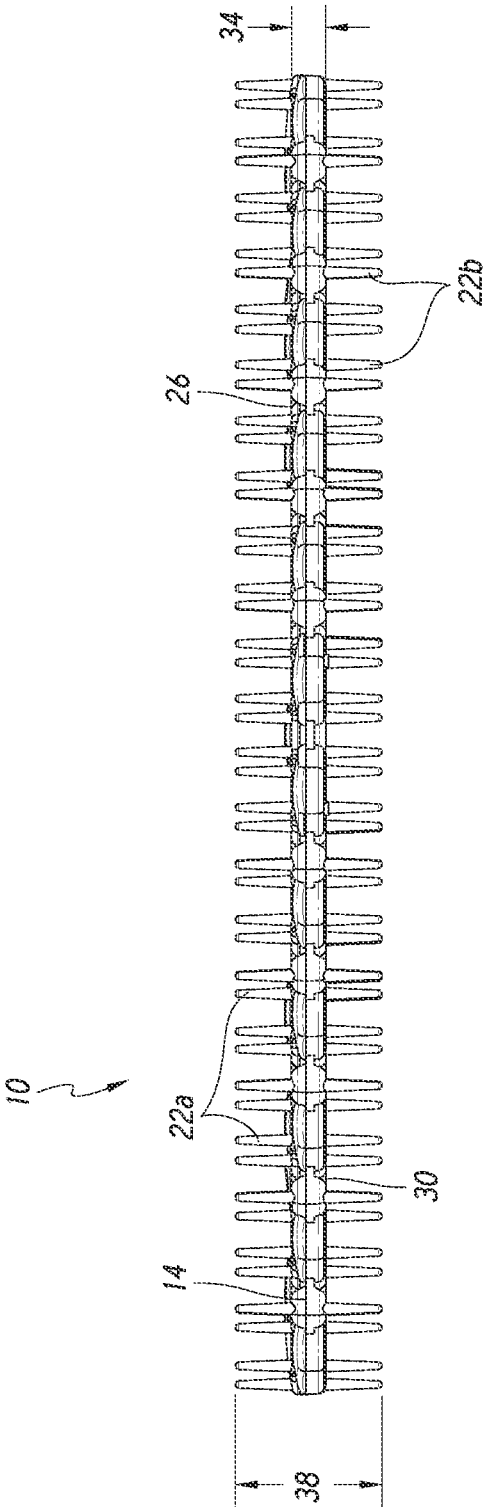

FIG. 5



FIG. 6

URINAL SCREENS

CROSS REFERENCE TO RELATED APPLICATIONS

Any and all applications for which a foreign or domestic priority claims is identified in the Application Data Sheet as filed with the present application are hereby incorporated by reference under 37 CFR 1.57.

TECHNICAL FIELD

Certain embodiments discussed herein relate to restroom screens and mats, and, more particularly, the present inventions relate to restroom urinal screens and mats.

DISCUSSION OF THE RELATED ART

Urinal screens are widely used as air fresheners and to prevent debris from being flushed down a urinal drain. In some cases, a fragrance is provided with the screens to help sanitize and freshen the air in and around the urinal.

SUMMARY OF THE INVENTIONS

A urinal screen can include a frame. In some embodiments, the frame has a first face and a second face opposite the first face. The frame can include a plurality of openings extending through the first face and the second face. In some cases, the screen includes a plurality of first posts extending from the first face of the frame. The screen can include a plurality of second posts extending from the second face of the frame.

According to some variants, the portion of the frame defining each of the openings has a polygonal perimeter structure. In some embodiments, each perimeter structure defining an opening has a plurality of braces and corners. In some cases, a plurality of the braces and corners are shared between two or more openings. In some embodiments, the braces and corners form a tessellation. According to some variants, each of plurality of first posts extends from the portion of the frame defining a corner of a perimeter structure forming one or more of the plurality of openings. In some cases, each of plurality of second posts extends from a midpoint of a brace of a the portion of the frame defining a perimeter structure forming one or more of the plurality of openings. In some embodiments, at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings. In some cases, at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings. In some embodiments, at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings and at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings. According to some variants, at least one of the plurality of second posts extends from a brace or corner of the portion of the perimeter structure defining each opening. In some embodiments, at least one of the plurality of first posts extends from a brace of the perimeter structure defining each opening or corner of the perimeter structure defining each opening. In some cases, each of the plurality of first posts is substantially identical to one or more of the plurality of second posts.

According to some variants, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one fourth of an overall thickness of the urinal screen

in the direction perpendicular to the first face of the frame. In some cases, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one eighth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame. In some embodiments, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface, the frame is positioned away from the surface by at least one third of a thickness of the urinal screen as measured perpendicular to the first face of the frame. In some cases, the plurality of openings occupy at least three fourths of a surface area of the frame as measured parallel to the first face (e.g., the first plane) of the frame. In some embodiments, the perimeter structures defining the plurality of openings occupy less than one fifth of a surface area of the frame as measured parallel to the first face (e.g., the first plane) of the frame.

According to some variants, a urinal screen includes a frame. The frame can have: a first face; a second face opposite the first face; and a plurality of openings extending through the frame between the first face and the second face. The urinal screen can include a plurality of first posts extending from the first face of the frame. In some embodiments, the urinal screen includes a plurality of second posts extending from the second face of the frame. In some embodiments, a plurality of ends of the plurality of second posts form a base upon which the urinal screen rests when the plurality of first posts point away from a surface upon which the urinal screen is set. In some embodiments, at least half of the plurality of first posts are a same size and shape as at least half of the plurality of second posts.

In some configurations, each of the openings is defined by a polygonal perimeter structure.

In some configurations, each opening is defined by a perimeter structure having plurality of braces and corners.

In some configurations, each of plurality of first posts extends from a corner of a perimeter structure of one or more of the plurality of openings.

In some configurations, each of plurality of second posts extends from a midpoint of a brace of a perimeter structure of one or more of the plurality of openings.

In some configurations, at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings.

In some configurations, at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

In some configurations, at least one of the plurality of second posts extends from each of the braces of the openings. In some configurations, at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

In some configurations, at least one of the plurality of second posts extends from a brace or corner of the perimeter structure defining each opening.

In some configurations, at least one of the plurality of first posts extends from a brace or corner of the perimeter structure defining each opening.

In some configurations, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one eighth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

In some configurations, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface, the frame is positioned away

from the surface by at least one third of a thickness of the urinal screen as measured perpendicular to the first face of the frame.

According to some variants, a urinal screen includes a frame. The frame can have: a first face; a second face opposite the first face; and a plurality of openings extending through the frame between the first face and the second face. In some embodiments, the urinal screen includes a plurality of first posts extending from the first face of the frame. The urinal screen can include a plurality of second posts extending from the second face of the frame. In some embodiments, the plurality of openings occupy at least half of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface. In some case, the plurality of openings occupy at least 75% of the surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

In some configurations, each of the plurality of first posts is substantially identical to one or more of the plurality of second posts.

In some configurations, the perimeter structures of the plurality of openings occupy less than one fifth of a surface area of the frame as measured parallel to a first plane face of the frame, wherein the first plane face of the frame is a plane passing through the frame when the frame is set on a flat horizontal surface.

According to some variants, a urinal screen includes a frame. The frame can include: a first face; a second face opposite the first face; and a plurality of interconnected cells, each cell having a polygonal shape with a plurality of sides and corners. In some embodiments, the urinal screen includes a plurality of first posts extending from away from the first face, each of the plurality of first posts connected to a side or corner of the plurality of interconnected cells. In some embodiments, the urinal screen include a plurality of second posts extending away from the second face of the frame, each of the plurality of second posts connected to a side or corner of the plurality of interconnected cells. In some cases each of the interconnected cells shares at least one side and at least one corner with another interconnected cell.

In some configurations, the plurality of interconnected cells form a tessellation.

In some configurations, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one fourth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

BRIEF DESCRIPTION OF THE DRAWINGS

The present inventions are described with reference to the accompanying drawings, in which like reference characters reference like elements, and wherein:

FIG. **1** is a perspective view of an embodiment of a urinal screen;

FIG. **2** is a top view of the urinal screen of FIG. **1**;

FIG. **3** is a front view of the urinal screen of FIG. **1**;

FIG. **4** is a close up top view of the urinal screen of FIG. **1**;

FIG. **5** is a close up top view of another embodiment of a urinal screen.

FIG. **6** is a schematic view of a post extending from a frame of a urinal screen at a non-perpendicular angle.

DETAILED DESCRIPTION OF THE INVENTIONS

An embodiment of a urinal screen **10** is illustrated in FIGS. **1-2**. The urinal screen **10** can be sized and shaped to fit into a urinal, toilet, or other bathroom appliance. As illustrated, the urinal screen **10** can include a frame **14**. The frame **14** can be sized and shaped to fit over all or a portion of a drain of a toilet or urinal. The frame **14** can define a plurality of openings **18** through a thickness of the frame **14**. In some embodiments, the urinal screen **10** includes a plurality of posts or structural supports **22** extending from one or more surfaces of the frame **14**.

In some embodiments, the screen **10** has a polygonal, elliptical, circular, or other overall shape. For example, as illustrated in FIG. **2**, the screen **10** can have a generally hexagonal shape, though many other shapes are contemplated (e.g., rectangles, pentagons, triangles, circles, or some combination thereof). In some embodiments, the screen **10** is shaped to fit a particular urinal or toilet.

The frame **14** and/or posts **22** can be constructed from a polymeric or solid material. For example, the frame **14** and/or posts **22** can be constructed using a 3D printer. In some cases, additives are added to the material of the frame **14** and/or posts **22**. Additives can include, for example, bacteria and/or odor neutralizers, silver ions, and other additives or combinations of additives. One method of manufacturing an embodiment of the urinal screen **10** can include providing plastic or EVA material, which may have a melting point of not greater than 250° F., loading the plastic or EVA with at least 15% to about 75% by weight of fragrance material to produce a fragranced plastic or EVA, loading the fragrance at a stage conducted at temperatures such that the fragranced plastic or EVA is from at least 15% by weight fragrance upon completion of the loading stage, and molding the fragranced plastic or EVA into a urinal screen, sized and shaped to be disposed in a urinal, forming openings **18** in the frame **14**, and forming posts **22** extending from the frame **14**.

The openings **18** can have various shapes, including, but not limited to, polygons (e.g., triangles, rectangles, pentagons, hexagons, etc.), ellipses, and/or some combination thereof. In some embodiments, each of the openings **18** has a substantially identical shape. In some embodiments, one or more of the openings **18** has a different shape from one or more of the other openings.

The openings **18** can occupy a large percentage of the overall surface area of the frame **14** as viewed in FIG. **2**. For example, the openings **18** can occupy more than ⅛, more than ⅔, more than ⅓, more than ¼, more than ⅜, more than ½, more than ⅝, more than ⅔, and/or more than ¾ of the overall surface area of the frame **14** as viewed in FIG. **2**. Utilizing a large number of openings **18** can reduce the overall weight of the urinal screen **10**.

A top surface (e.g., the first surface **26**) of the frame **14** can lie on a first plane when the urinal screen **10** is set on a flat surface. In some cases, a bottom surface (e.g., the second surface **30**) of the frame **14** can lie on a second plane when the urinal screen is set on a flat surface. In some embodiments, a maximum cross-sectional area of the frame **14** (e.g., the area not occupied by openings **18**), as measured on a frame plane through the frame and parallel to the first and/or second planes is less than ½, less than ¼, less than ⅕, less than ⅙, less than ⅐, less than ⅛, less than ⅙, less than 1/10, less than 1/12, less than 1/15, and/or less than 1/20 of the area defined by the outer perimeter of the frame as measured in the plane. Many variations are possible

As illustrated in FIGS. **2** and **3**, one or more of the openings **18** (e.g., cells) can have a perimeter which includes a plurality of sides (e.g., braces) **42** and corners **46**. In some cases, all or a portion of the frame **14** forms a tessellation of openings **18** wherein a plurality of the sides **42** of the

openings **18** are shared between two or more openings **18**. In some embodiments, each of the openings **18** shares at least one side and at least one corner with another opening.

In some cases, the sides **42** and/or corners **46** of the openings **18** have contoured (e.g., convex) upper and/or lower surfaces. The contoured surfaces of the sides **42** and corners **46** can deflect fluid (e.g., urine) to reduce splash in the urinal, toilet, or other environment in which the urinal screen **10** is installed.

In some embodiments, as illustrated in FIGS. **1** and **2**, portions of the frame **14** include one or more solid or closed portions between or surrounding the openings **18**. For example, the frame **14** can include one or more solid cells **19** positioned between and/or adjacent the openings **18** of the frame **14**. The solid cells **19** can provide a surface area on which various letters, numbers, symbols, trademarks, and/or other visual features may be placed. For example, advertisements, installation instructions, date features, expiration dates, and/or other features may be included on the solid cells **19**. In some embodiments, the frame **14** includes one or more intermediate solid cells **20** and/or large solid cells **15** for placement of larger/more complex visual features. For example, the intermediate solid cells **20** can occupy an area greater than or equal to 2, 3, 4, 5, and/or 6 openings **18**. In some embodiments, the large solid cell **15** can occupy an area greater than or equal to **10** openings **18**. Many variations are possible. In some embodiments, the one or more solid or closed portions facilitate easier removal of the screen **10** from a mold. In some cases, utilizing solid portions increases an amount of fragrance that can be embedded, coated, injected, or otherwise associated with the screen **10**.

In some embodiments, the posts **22** extend from the corners **46** of the frame forming openings **18**. FIG. **4** illustrates an embodiment of a screen **10'** wherein the posts **22'** extend from the sides **42'** (e.g., the midpoints of the sides **42'**) of the portions of the frame forming the openings **18'** of the frame **14'**. In some embodiments, posts **22** extend from both the portions of the fame forming the corners **46** and the portions of the frame forming the sides **42** or from some combination thereof. In some embodiments, posts **22** extend from the portions of the frame forming the corners **46** of the openings **18** on one side of the frame **14** (e.g., the first side **26**, as shown in FIG. **5**) and from the portions of the frame forming the sides **42** of the openings **18** on the other side of the frame **14** (e.g., the second side **30**).

As illustrated in FIG. **5**, the posts **22** can extend from a first surface **26** of the frame **14**. In some embodiments, posts **22** extend from both the first surface **26** of the frame **14** and a second surface **30** of the frame **14**. For example, a first plurality of posts **22***a* can extend from the first surface **26** of the frame **14** and a second plurality of posts **22***b* can extend from the second surface **30** of the frame **14**. Each of the posts in the first plurality of posts **22***a* can be substantially identical to the each of the posts in the second plurality of posts **22***b*. For example, each of the posts can have the same height, width and/or overall shape.

In some embodiments, at least half, at least ¾, at least ⅕, at least ⅔, at least ⅓, at least 9/10, at least ⅘ and/or at least 1/10 of the first plurality of posts **22***a* have a same size and shape as at least half, at least ¾, at least ⅕, at least ⅔, at least ⅓, at least 9/10, at least 4/5and/or at least 1/10 of the second plurality of posts **22***b*. In some embodiments, one or more of the posts in the first plurality of posts **22***a* has a different shape and/or height than one or more of the posts in the second plurality of posts **22***b*. In some embodiments, the first plurality of posts **22***a* and/or the second plurality of posts **22***b* have a plurality of heights. For example, a percentage (e.g., 25%, 50%, 75% or some other percentage) of the posts **22** can be shorter than the remaining posts as measured from the first or second surfaces **26**, **30** of the frame **14**. In some embodiments, at least ⅘, at least ⅗, at least ½, and/or at least ¼ of the posts **22** have a height differing from the remaining posts **22**. In some embodiments, one or more of the posts **22** is at least ⅕, at least 1/10, at least ⅛, at least ¼, and/or at least ⅓ shorter than one or more of the other posts **22**. In some cases, each post is at least ⅕ shorter, at least 1/10 shorter, at least ⅛ shorter, at least ¼ shorter, at least ⅓ shorter, at least ½ taller, at least ¼ taller, at least ⅛ taller, at least 1/10 taller, and/or at least 1/16 taller than at least one of the 3 closest posts **22**, at least one of the 5 closest posts **22**, at least one of the **7** closest posts **22**, at least one of the 9 closest posts **22**, at least one of the 10 closest posts **22**, at least one of the 12 closest posts **22**, and/or at least one of the 15 closest posts **22**. In some embodiments, shortening a percentage of the posts **22** can reduce the likelihood that debris is caught in the urinal screen **10**. The posts **22** can extend perpendicularly from the frame **14** (e.g., from the first or second surfaces **26**, **30** of the frame **14**). In some embodiments, one or more of the posts **22** extends from the frame **14** at a non-perpendicular angle (for example, non-perpendicular angle A of FIG. **6**).

The frame **14** can have a generally planar or flat shape. In some embodiments, the frame **14** is curved or otherwise shaped in non-planar fashion. For example, the frame **14** can be molded in a non-planar shape to match the contours of a urinal or toilet.

The frame **14** can have a frame thickness **34** (e.g., a distance between the first and second surfaces **26**, **30** of the frame **14**). The frame thickness **34** can be uniform across the entire frame **14** or can vary in certain portions of the frame **14**. An overall thickness **38** of the urinal screen **10** can be measured from a tip of the tallest post **22** extending from the first surface **26** of the frame **14** to a tip of the tallest post **22** extending from the second surface **30** of the fame **14** as measured perpendicularly from the first and second surfaces **26**, **30**. In some cases, wherein the frame **14** is not planar/flat, the overall thickness **38** of the urinal screen **10** can be determined via the tips of the posts **22** as measured perpendicularly to a tangent plane of the first surface **26** of the frame **14** at a point on the frame **14** where the thicknesses **34**, **38** are being measured.

In some embodiments, the frame thickness **34** at a given position on the frame **14** is less than or equal to approximately ½ of the overall screen thickness **38** as measured perpendicularly to the first surface **26** of the frame **14** at the given position. In some embodiments, the frame thickness **34** is less than or equal to ⅔, less than or equal to ⅝, less than or equal to ⅜, less than or equal to ⅓, less than or equal to ¼, less than or equal to ⅖, less than or equal to ⅛, less than or equal to 1/10, less than or equal to 1/16, and/or less than or equal to 1/32 of the overall screen thickness **38**. Use of a thin frame **14** can reduce the overall weight of the urinal screen **10**.

In some embodiments, the urinal screen **10** is configured such that a plurality of posts **22** space the frame **14** from the installation surface of a urinal or other fixture onto which the urinal screen **10** is installed. The posts **22** space the frame **14** from the installation surface independent from the orientation of the urinal screen **10**. For example, the second plurality of posts **22***b* can form a base of the urinal screen **10** and can space the frame **14** from the installation surface when the screen **10** is installed with the second surface **30** of the frame **14** facing the installation surface. On the other

hand, the first plurality of posts **22***a* can form a base of the urinal screen **10** and can space the frame **14** from the installation surface when the screen **10** is installed with the first surface **26** of the frame facing the installation surface. In some embodiments, the posts **22** space the frame **14** from the installation surface by at least ⅓ of the overall thickness **38** of the urinal screen **10**. In some embodiments, the posts **22** space the frame **14** from the installation surface by at least ⅛, at least ⅐, at least ⅙, at least ⅕, at least ¼, at least ⅜, and/or by at least 4/9 of the overall thickness **38** of the urinal screen **10**.

Spacing the frame **14** from the installation surface can reduce the likelihood that the openings **18** are clogged by debris. In some embodiments, the posts **22** positioned between the frame **14** and the installation surface can reduce splashing in the urinal by deflecting urine or other fluids which pass between the frame **14** and the installation surface (e.g., fluid that passes through the openings **18** or around the perimeter of the frame **14**).

For expository purposes, the term "horizontal" as used herein is defined as a plane parallel to the plane or surface of the floor of the area in which the system being described is used or the method being described is performed, regardless of its orientation. The term "floor" floor can be interchanged with the term "ground." The term "vertical" refers to a direction perpendicular to the horizontal as just defined. Terms such as "above," "below," "bottom," "top," "side," "higher," "lower," "upper," "over," and "under," are defined with respect to the horizontal plane.

As used herein, the terms "attached," "connected," "mated," and other such relational terms should be construed, unless otherwise noted, to include removable, moveable, fixed, adjustable, and/or releasable connections or attachments. The connections/attachments can include direct connections and/or connections having intermediate structure between the two components discussed.

The terms "approximately", "about", "generally" and "substantially" as used herein represent an amount close to the stated amount that still performs a desired function or achieves a desired result. For example, the terms "approximately", "about", "generally," and "substantially" may refer to an amount that is within less than 10% of the stated amount.

While the preferred embodiments of the present inventions have been described above, it should be understood that they have been presented by way of example only, and not of limitation. It will be apparent to persons skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the inventions. Thus the present inventions should not be limited by the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents. Furthermore, while certain advantages of the inventions have been described herein, it is to be understood that not necessarily all such advantages may be achieved in accordance with any particular embodiment of the inventions. Thus, for example, those skilled in the art will recognize that the inventions may be embodied or carried out in a manner that achieves or optimizes one advantage or group of advantages as taught herein without necessarily achieving other advantages as may be taught or suggested herein.

What is claimed is:

1. A urinal screen comprising:

a frame having:

a first face;

a second face opposite the first face; and

a plurality of openings extending through the frame between the first face and the second face;

a plurality of first posts extending from the first face of the frame; and

a plurality of second posts extending from the second face of the frame;

wherein the plurality of openings occupy at least half of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface;

wherein a plurality of ends of the plurality of first posts form a base upon which the urinal screen rests when the plurality of second posts point away from a surface upon which the urinal screen is set;

wherein a plurality of ends of the plurality of second posts form a base upon which the urinal screen rests when the plurality of first posts point away from a surface upon which the urinal screen is set;

wherein, when the urinal screen is set upon a surface in a urinal such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface upon which the urinal screen is set by at least ⅓ of a thickness of the urinal screen as measured perpendicular to the first face of the frame;

wherein at least one of the plurality of first posts extends from a perimeter around each of said plurality of openings; and

wherein at least one of the plurality of second posts extends from a perimeter around each of said plurality of openings.

2. The urinal screen of claim **1**, wherein each of the plurality of openings is defined by a polygonal perimeter structure.

3. The urinal screen of claim **1**, wherein each of the plurality of openings is defined by a perimeter structure having a plurality of braces and corners.

4. The urinal screen of claim **3**, wherein each of the plurality of first posts extends from a corner of a perimeter structure defining one or more of the plurality of openings.

5. The urinal screen of claim **3**, wherein each of the plurality of second posts extends from a midpoint of a brace of a perimeter structure defining one or more of the plurality of openings.

6. The urinal screen of claim **3**, wherein at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings.

7. The urinal screen of claim **3**, wherein at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

8. The urinal screen of claim **3**, wherein at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings and wherein at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

9. The urinal screen of claim **3**, wherein at least one of the plurality of second posts extends from a brace or corner of the perimeter structure defining each opening.

10. The urinal screen of claim **3**, wherein at least one of the plurality of first posts extends from a brace or corner of the perimeter structure defining each opening.

11. The urinal screen of claim **1**, wherein a thickness of the frame in a direction perpendicular to the first face of the frame is less than one eighth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

12. The urinal screen of claim **1**, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface upon which the urinal screen is set by at least ⅜ of the thickness of the urinal screen.

13. The urinal screen of claim **1**, wherein the plurality of openings occupy at least 75% of the surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

14. The urinal screen of claim **1**, wherein each of the plurality of first posts is substantially identical to one or more of the plurality of second posts.

15. The urinal screen of claim **1**, wherein perimeter structures that define the plurality of openings occupy less than one fifth of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

16. A urinal system comprising:

the screen of claim **1**; and

a urinal having a bottom surface and a drain extending through a portion of the bottom surface;

wherein the urinal screen is configured to be positioned on the bottom surface of the urinal.

17. The urinal screen of claim **1**, wherein one or more of the first posts extend from the first face of the frame at a non-perpendicular angle.

18. The urinal screen of claim **17**, wherein one or more of the second posts extend from the second face of the frame at a non-perpendicular angle.

19. A urinal screen comprising:

a frame having:

a first face;

a second face opposite the first face; and

a plurality of interconnected cells at least partially defined by a plurality of braces that intersect at corners, the plurality of interconnected cells comprising at least a plurality of perimeter cells and a plurality of interior cells;

wherein the plurality of interior cells comprises a first cell, a second cell, and a third cell, said first cell and said second cell each partially defined by a first brace positioned between said first cell and said second cell, said second cell and said third cell each partially defined by a second brace positioned between said second cell and said third cell, and said first cell and said third cell each partially defined by a third brace positioned between said first cell and said third cell;

wherein each of the first brace, the second brace, and the third brace comprises a first end and a second end, and wherein:

the first end of the first brace intersects at a corner with the two other braces;

the first end of the second brace intersects at a corner with the two other braces; and

the first end of the third brace intersects at a corner with the two other braces;

a plurality of first posts each connected to a brace or corner of the frame and extending from away from the first face of the frame, and

a plurality of second posts each connected to a brace or corner of the frame and extending away from the second face of the frame.

20. The urinal screen of claim **19**, wherein the plurality of interconnected cells form a tessellation.

21. The urinal screen of claim **19**, wherein a thickness of the frame in a direction perpendicular to the first face of the frame is less than one fourth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

22. A urinal system comprising:

the screen of claim **19**; and

a urinal having a bottom surface and a drain extending through a portion of the bottom surface;

wherein the urinal screen is configured to be positioned on the bottom surface of the urinal.

23. The urinal screen of claim **19**, wherein one or more of the first posts extend from the first face of the frame at a non-perpendicular angle.

24. The urinal screen of claim **23**, wherein one or more of the second posts extend from the second face of the frame at a non-perpendicular angle.

25. The urinal screen of claim **19**, wherein the first cell, second cell, and third cell each comprise a polygonal shape.

26. The urinal screen of claim **19**, wherein the first cell, second cell, and third cell each comprise a hexagonal shape.

27. The urinal screen of claim **19**, wherein at least some of the plurality of interconnected cells comprise a polygonal shape.

28. The urinal screen of claim **19**, wherein each of the plurality of interconnected cells comprises a polygonal shape.

29. The urinal screen of claim **19**, wherein each of the first brace, the second brace, and the third brace has at least one of the plurality of first posts connected thereto and at least one of the plurality of second posts connected thereto.

30. The urinal screen of claim **19**, further comprising one or more additional posts connected to the frame at an area other than a brace or corner.

31. The urinal screen of claim **19**, wherein each of the plurality of first posts is connected to a brace of the frame, and each of the plurality of second posts is connected to a brace of the frame.

32. The urinal screen of claim **19**, wherein each of the plurality of first posts is connected to a corner of the frame, and each of the plurality of second posts is connected to a corner of the frame.

33. The urinal screen of claim **19**, wherein at least some of the plurality of first posts and plurality of second posts are connected to braces of the frame, and at least some of the plurality of first posts and plurality of second posts are connected to corners of the frame.

34. The urinal screen of claim **19**, wherein a majority of the plurality of interconnected cells have identical shapes.

35. The urinal screen of claim **19**, wherein a thickness of the frame in a direction perpendicular to the first face of the frame is less than ⅓ of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

36. The urinal screen of claim **19**, wherein a thickness of the frame in a direction perpendicular to the first face of the frame is less than ⅛ of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

37. The urinal screen of claim **19**, wherein the second end of the first brace intersects at a corner with no more than two other braces, the second end of the second brace intersects at a corner with no more than two other braces, and the second end of the third brace intersects at a corner with no more than two other braces.

38. A urinal screen comprising:

a frame having:

a first face:

a second face opposite the first face; and

a plurality of openings extending through the frame between the first face and the second face;

a plurality of first posts extending from the first face of the frame; and

a plurality of second posts extending from the second face of the frame;

wherein a plurality of ends of the plurality of first posts form a base upon which the urinal screen rests when the plurality of second posts point away from a surface upon which the urinal screen is set;

wherein a plurality of ends of the plurality of second posts form a base upon which the urinal screen rests when the plurality of first posts point away from a surface upon which the urinal screen is set;

wherein a number of said plurality of first posts and a number of said plurality of second posts are positioned along a perimeter of at least some of the plurality of openings, so as to surround the at least some of the plurality of openings; and

wherein, when the urinal screen is set upon a surface in a urinal such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface by at least ¼ of a thickness of the urinal screen as measured perpendicular to the first face of the frame, such that posts positioned between the frame and the surface upon which the urinal screen is set can reduce splashing on a user of the urinal by deflecting a flow of urine which passes through said plurality of openings.

39. A urinal system comprising:

the screen of claim **38**; and

a urinal having a bottom surface and a drain extending through a portion of the bottom surface;

wherein the urinal screen is configured to be positioned on the bottom surface of the urinal.

40. The urinal screen of claim **38**, wherein one or more of the first posts extend from the first face of the frame at a non-perpendicular angle.

41. The urinal screen of claim **38**, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface by at least ⅓ of the thickness of the urinal screen as measured perpendicular to the first face of the frame.

42. The urinal screen of claim **38**, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface by at least ⅜ of the thickness of the urinal screen as measured perpendicular to the first face of the frame.

43. The urinal screen of claim **38**, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface by at least ⅘ of the thickness of the urinal screen as measured perpendicular to the first face of the frame.

44. The urinal screen of claim **38**, wherein a thickness of the frame as measured perpendicular to the first face of the frame is less than or equal to ⅓ of the thickness of the urinal screen.

45. The urinal screen of claim **38**, wherein a thickness of the frame as measured perpendicular to the first face of the frame is less than or equal to ¼ of the thickness of the urinal screen.

46. The urinal screen of claim **38**, wherein a thickness of the frame as measured perpendicular to the first face of the frame is less than or equal to ⅛ of the thickness of the urinal screen.

47. The urinal screen of claim **38**, wherein at least half of the plurality of first posts are a same size and shape as at least half of the plurality of second posts.

48. The urinal screen of claim **38**, wherein the plurality of openings occupy at least half of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

49. The urinal screen of claim **38**, wherein the plurality of openings occupy more than ⅔ of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

50. The urinal screen of claim **38**, wherein the plurality of openings occupy at least ¾ of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

51. The urinal screen of claim **38**, wherein the perimeter of the at least some of the plurality of openings comprises a polygonal shape defined by a plurality of braces and corners, and at least some of the number of said plurality of first posts and at least some of the number of said plurality of seconds posts extend from the corners.

52. The urinal screen of claim **38**, wherein the perimeter of the at least some of the plurality of openings comprises a polygonal shape defined by a plurality of braces and corners, and at least some of the number of said plurality of first posts and at least some of the number of said plurality of seconds posts extend from the braces.

53. The urinal screen of claim **38**, wherein six of said plurality of first posts and six of said plurality of second posts are positioned along the perimeter of the at least some of the plurality of openings, so as to surround the at least some of the plurality of openings.

54. The urinal screen of claim **38**, wherein the plurality of openings comprise a contoured side surface to further reduce splashing on the user of the urinal by deflecting a flow of urine.

55. The urinal screen of claim **40**, wherein one or more of the second posts extend from the second face of the frame at a non-perpendicular angle.

* * * * *