

FOR SAFE & ACCURATE MEASUREMENT


ISO 9001:2008 Certified Quality System

Installation time cut in half

Uninterrupted flow path facilitates accurate gas measurement and minimizes pulsation / square root errors

Full 3/8" bore

Dielectric kits available

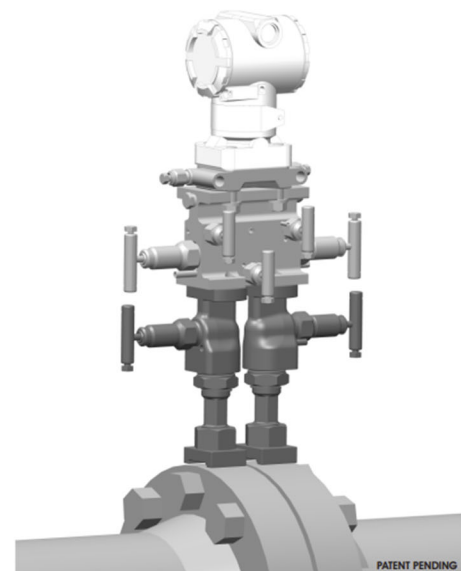

PATENT PENDING



**NOTE: SLOTTED HOLES TO ACCOMMODATE
2-1/8" - 2-1/4" BOLT SPACING**

SEAL GASKET
DIELECTRIC ISOLATOR OPTION

**INTEGRAL
BLOCK VALVE**

AK-147
STABILIZED CONNECTOR WITH
INTEGRAL BLOCK VALVE

STABILIZED CONNECTOR NUT

STABILIZED CONNECTOR ASSEMBLY

WASHER
DIELECTRIC ISOLATOR
OPTION

INSULATION BUSHING
DIELECTRIC ISOLATOR
OPTION

WASHER
DIELECTRIC ISOLATOR
OPTION

STABILIZED
CONNECTOR FOOT

BOLT

Parker PGI provides this information in good faith, and it is intended only as an informative guide to Parker PGI products and services. Individuals using this literature must exercise their independent judgment in evaluating product selection and determining product appropriateness for their particular purpose, system requirements and certifications. Parker PGI reserves the right to change product designs and specifications without notice.



16101 Vallen Drive • Houston, TX 77041 USA
713-466-0056 • 1-800-231-0233 • Fax: 1-800-568-9228
sales@pqjint.com • www.pqjint.com



© Parker PGI, 2013 [3-18-13 Rev. 6]