US008467272B2

(12) **United States Patent**
Fujisawa

(10) **Patent No.: US 8,467,272 B2**
(45) **Date of Patent: Jun. 18, 2013**

(54) **TIMEPIECE WITH INTERNAL ANTENNA**

(75) Inventor: **Teruhiko Fujisawa**, Nagano-ken (JP)

(73) Assignee: **Seiko Epson Corporation**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 267 days.

(21) Appl. No.: **12/871,483**

(22) Filed: **Aug. 30, 2010**

(65) **Prior Publication Data**

US 2011/0051561 A1 Mar. 3, 2011

(30) **Foreign Application Priority Data**

Sep. 1, 2009 (JP) 2009-201557
Jun. 24, 2010 (JP) 2010-143886

(51) **Int. Cl.**
G04C 11/02 (2006.01)

(52) **U.S. Cl.**
USPC **368/47**

(58) **Field of Classification Search**
USPC 200/46, 47, 64, 76, 14, 10, 13, 185, 200/55, 276, 278; 343/718, 702, 846, 848, 343/720
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,094,404	A *	7/2000	Hidai et al.	368/205
6,411,569	B1	6/2002	Megner et al.	
6,542,120	B1	4/2003	Gilbertson	
6,573,445	B1	6/2003	Burgers	
7,190,638	B2	3/2007	Oguchi	
7,391,677	B2	6/2008	Urano et al.	
2004/0137963	A1	7/2004	Barras et al.	
2004/0155818	A1	8/2004	Barras et al.	
2005/0195689	A1	9/2005	Oguchi	
2006/0153009	A1	7/2006	Matoge et al.	
2006/0227058	A1 *	10/2006	Zellweger et al.	343/718
2009/0229667	A1	9/2009	Shrotriya et al.	
2010/0300507	A1	12/2010	Heng et al.	

FOREIGN PATENT DOCUMENTS

EP	0564236	A2	10/1993
EP	1522908	A1	4/2005
EP	1666994	A2	6/2006
EP	1884753	A1	2/2008
EP	2093634	A2	8/2009
EP	2177962	A2	4/2010
JP	7-87293		9/1995
JP	10-197662		7/1998
JP	11-112227		4/1999
JP	2000-138607		5/2000

(Continued)

OTHER PUBLICATIONS

European Search Report dated Nov. 15, 2011, EP Application No. 10174478.7.

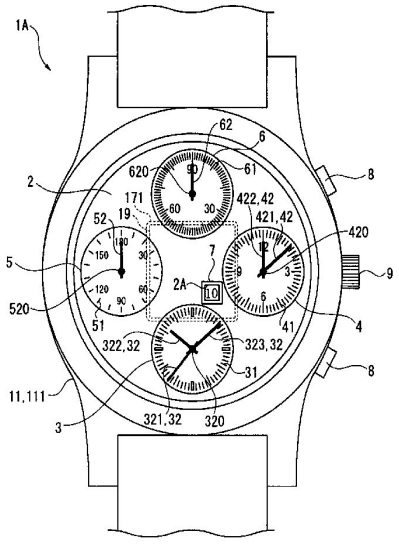
(Continued)

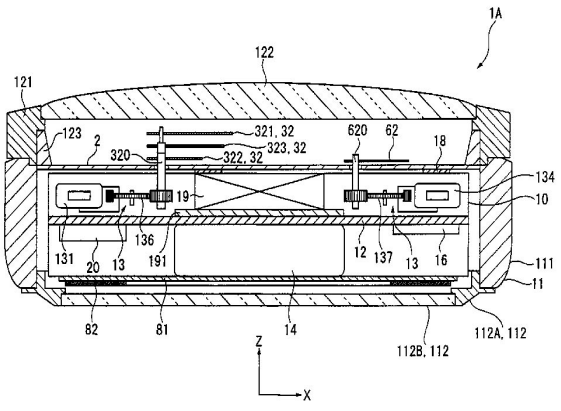
Primary Examiner — Edwin A. Leon

(57) **ABSTRACT**

A timepiece with an internal antenna, including: a case that is made from a conductive material; a movement that is housed in the case and has a plurality of motors that drive staffs disposed at a plurality of locations; a dial that is made from a nonconductive material; and a patch antenna that is disposed inside the case on the back side of the dial, receives radio signals transmitted from an external source, and includes a dielectric and an electrode formed in the dielectric; wherein the patch antenna is disposed separated at least a specific distance from the inside surface of the case, and the staffs are disposed between the case and the patch antenna.

29 Claims, 17 Drawing Sheets





Google Exhibit 1036
Google v. Smartwatch

FOREIGN PATENT DOCUMENTS

JP	2001-027680	1/2001
JP	2006-189379	7/2006
JP	2006-258704	9/2006
JP	2007-526985	9/2007
JP	4044898	11/2007
WO	03/005486 A1	1/2003
WO	2004114029 A1	12/2004

OTHER PUBLICATIONS

Office Action, U.S. Appl. No. 12/580,553, dated May 18, 2012.
Office Action, U.S. Appl. No. 12/580,553, dated Oct. 18, 2011.

* cited by examiner

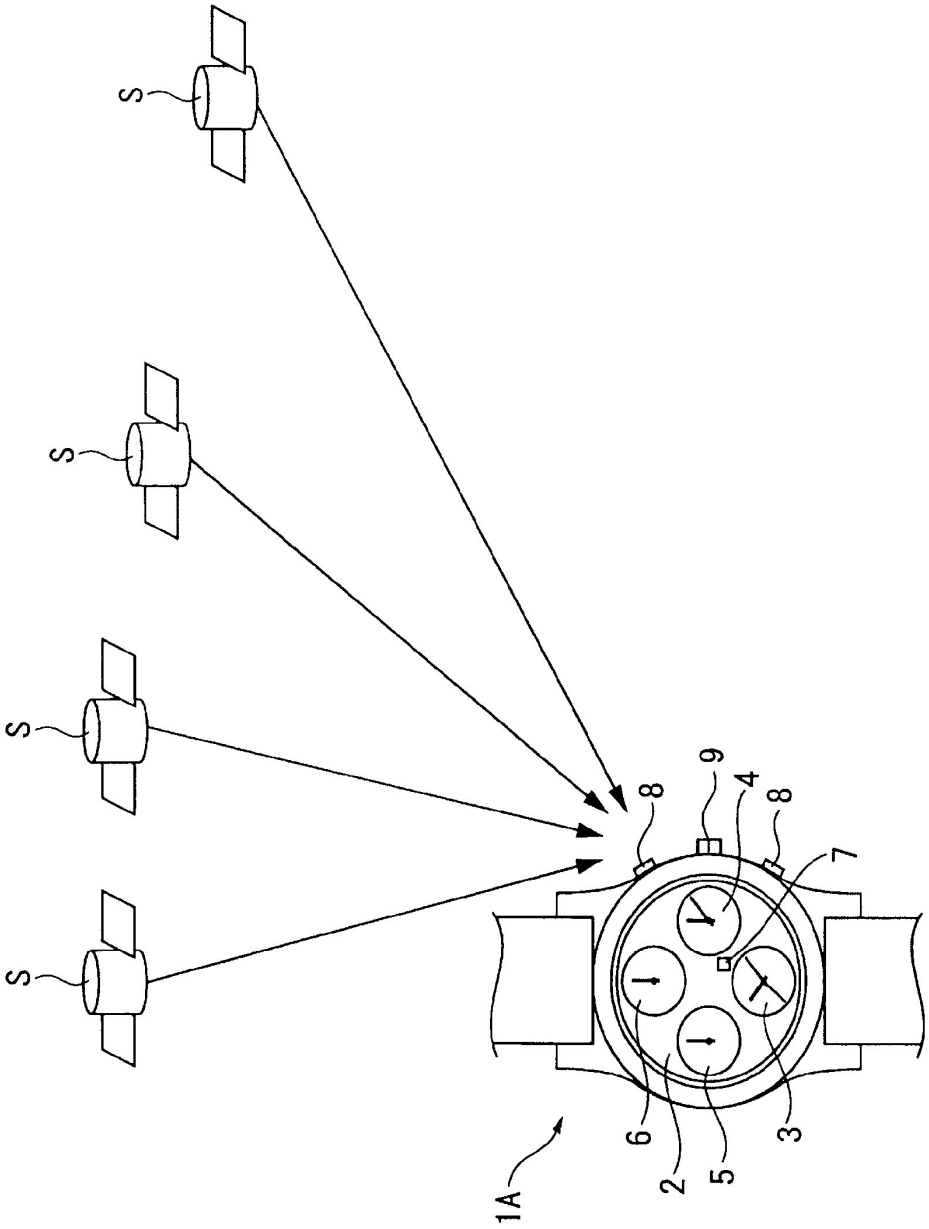


FIG. 1

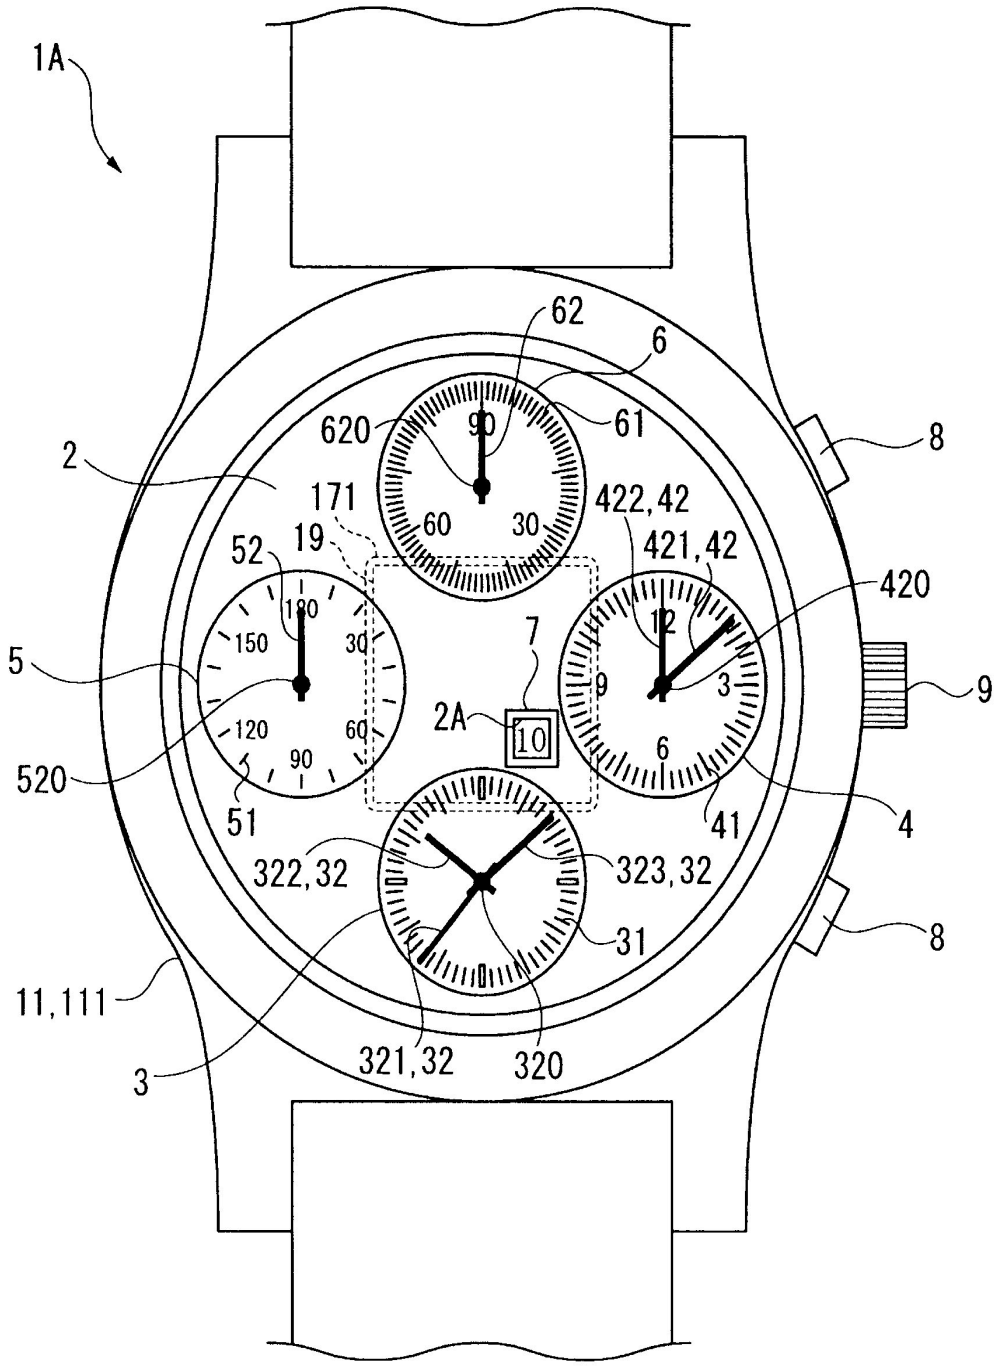

1A
62
6
620
61
8
2
171
422,42
421,42
52
19
420
5
7
9
2A
10
520
51
41
4
322,32
323,32
31
8
11,111
3
321,32
320

FIG. 2

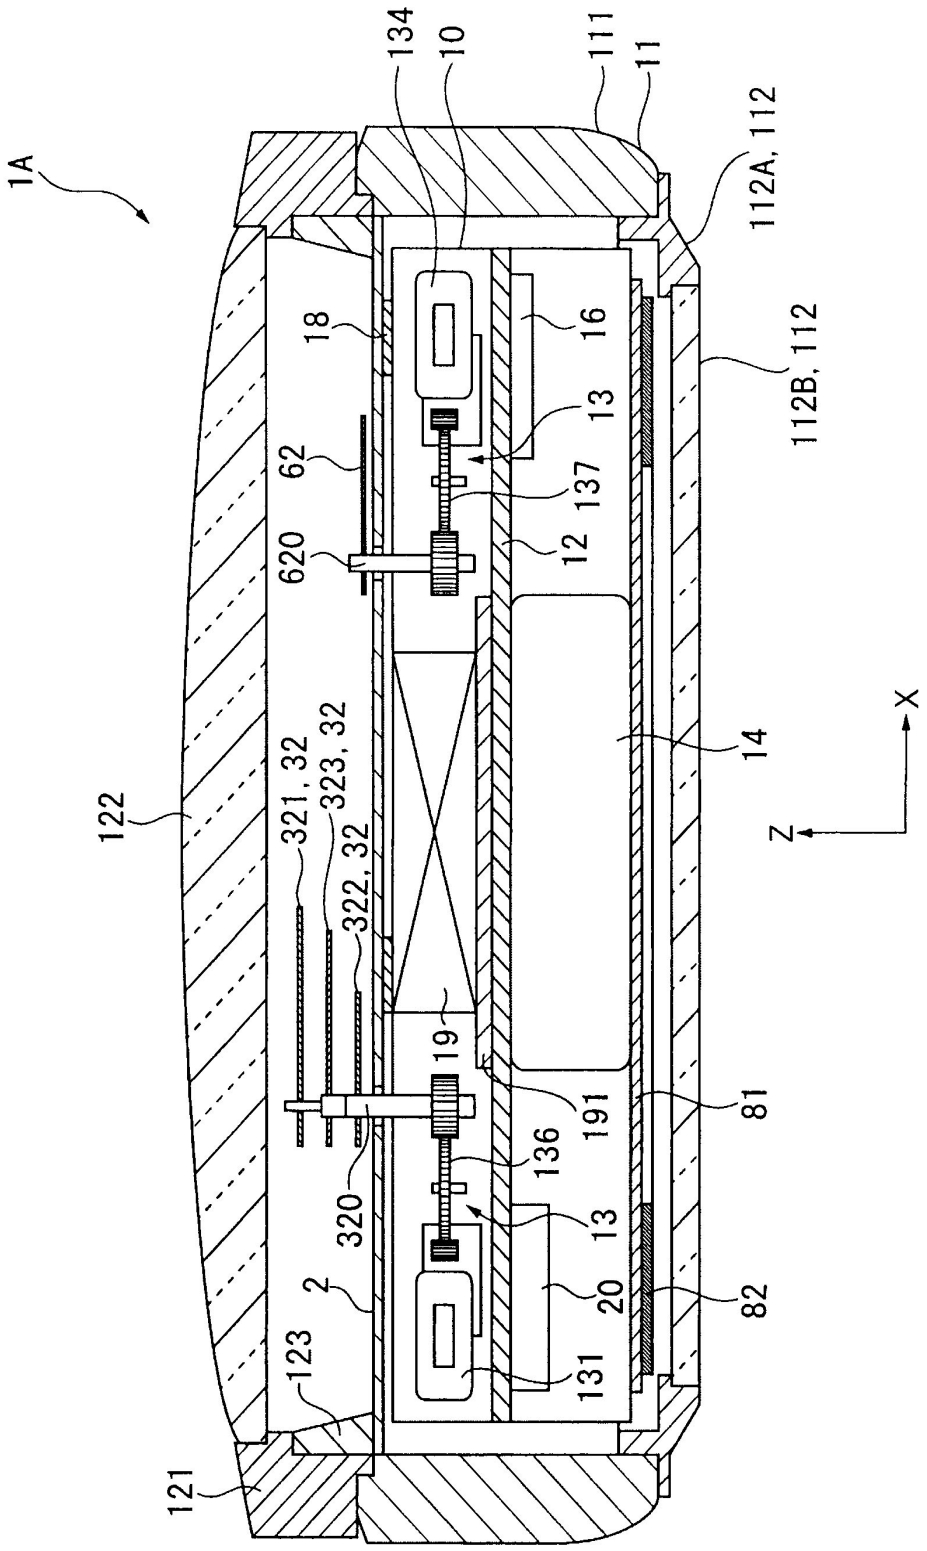

1A
134
10
111
11
112A, 112
112B, 112
18
16
13
62
137
620
12
14
122
321, 32
323, 32
322, 32
19
191
81
136
320
13
2
20
82
123
131
121
X
Z

FIG. 3

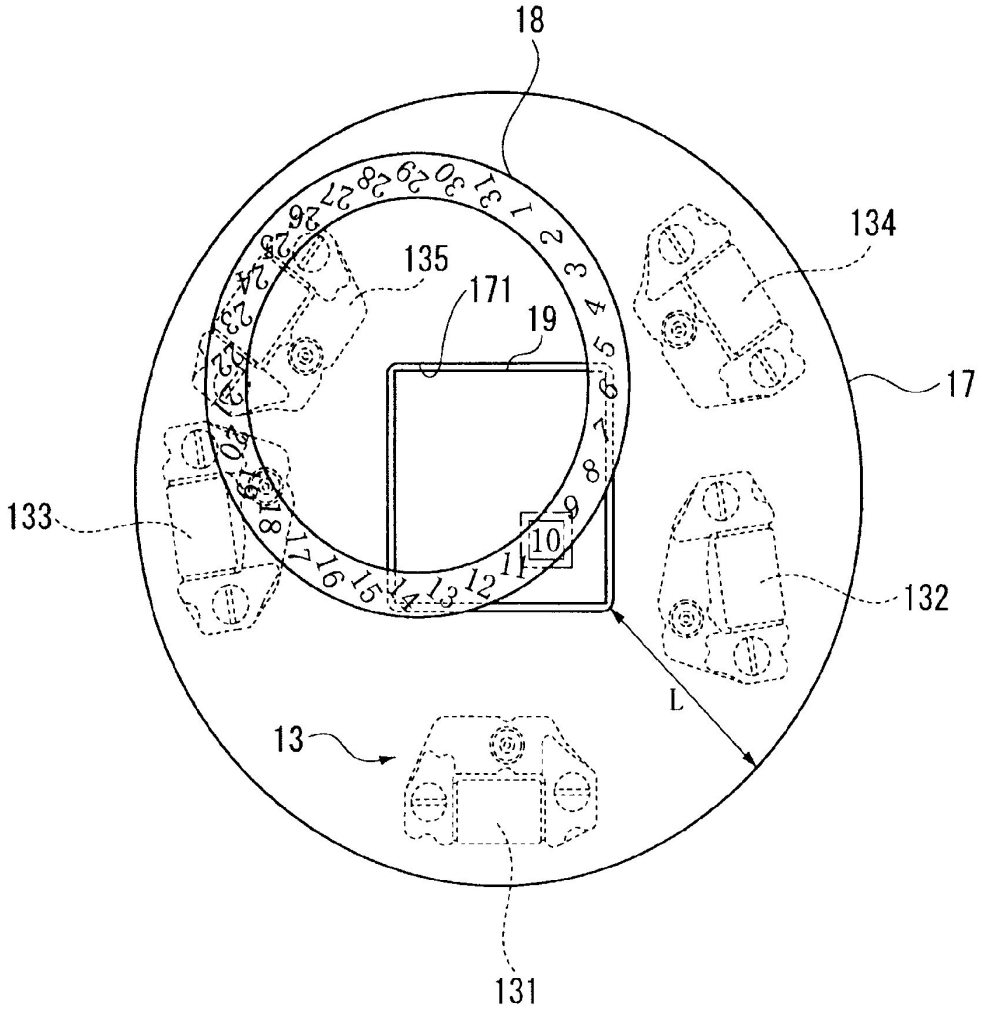


FIG. 4

FIG. 5A

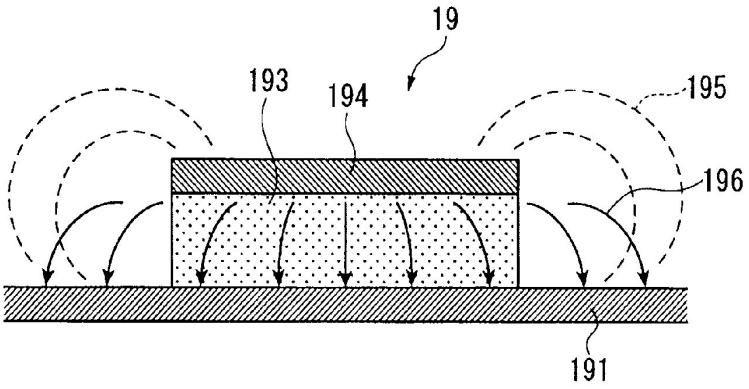
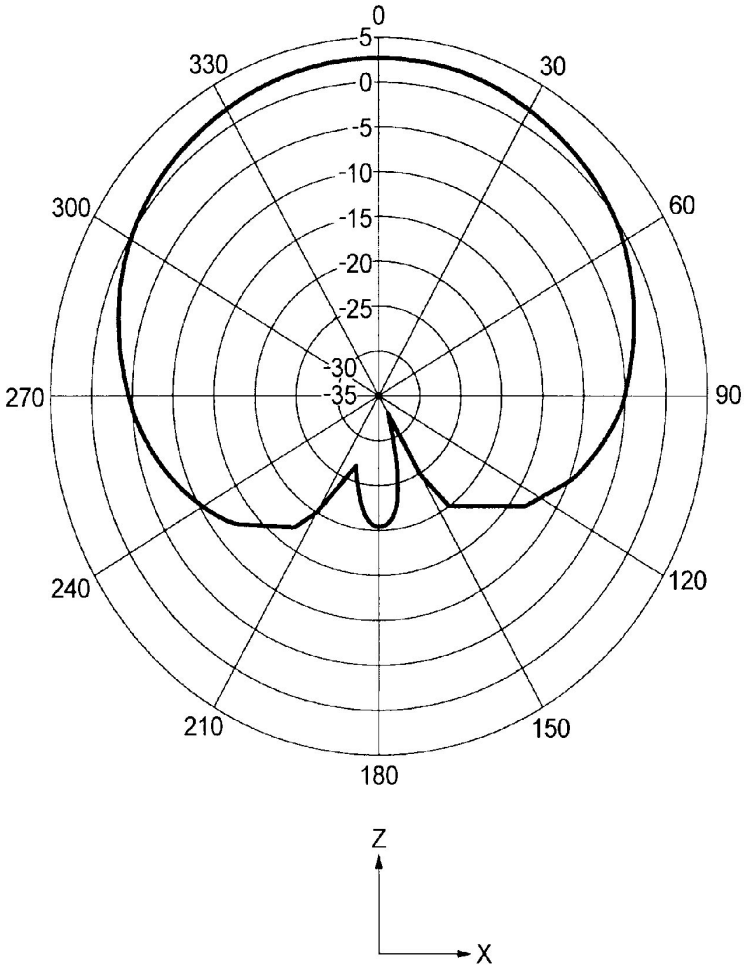

19
193
194
195
196
191

FIG. 5B


0
5
0
-5
-10
-15
-20
-25
-30
-35
30
60
90
120
150
180
210
240
270
300
330
Z
X

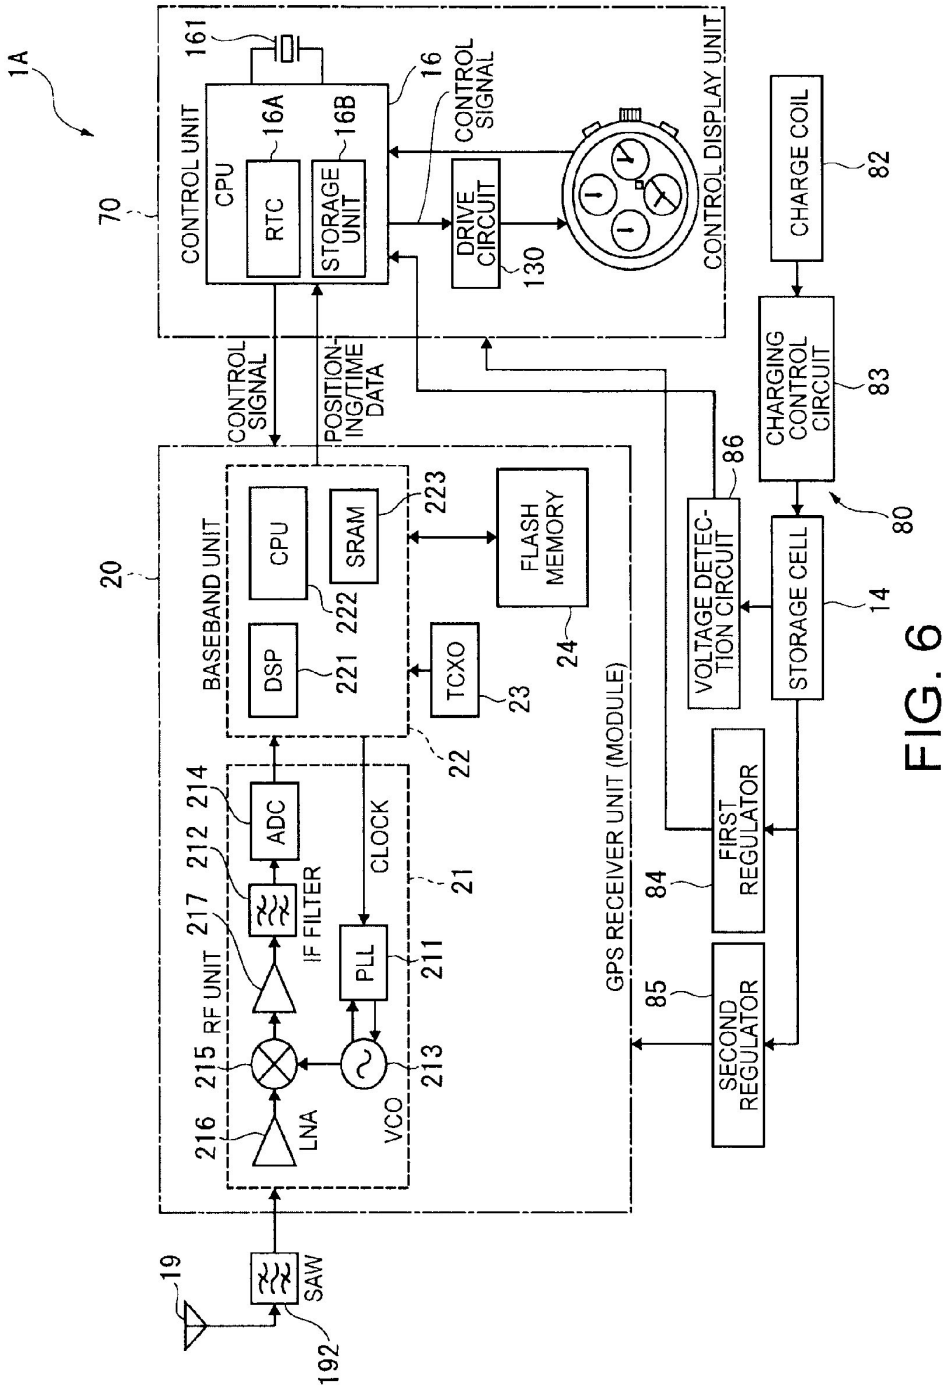

1A
70
CONTROL UNIT
CPU
RTC
STORAGE UNIT
16A
16B
161
16
CONTROL SIGNAL
DRIVE CIRCUIT
130
CONTROL DISPLAY UNIT
CHARGE COIL
82
CHARGING CONTROL CIRCUIT
83
80
CONTROL SIGNAL
POSITIONING/TIME DATA
86
20
BASEBAND UNIT
CPU
SRAM
223
222
DSP
221
FLASH MEMORY
24
TCXO
23
22
214
ADC
212
IF FILTER
217
RF UNIT
215
LNA
216
CLOCK
21
PLL
211
VCO
213
GPS RECEIVER UNIT (MODULE)
VOLTAGE DETECTION CIRCUIT
STORAGE CELL
14
84
FIRST REGULATOR
85
SECOND REGULATOR
19
SAW
192

FIG. 6

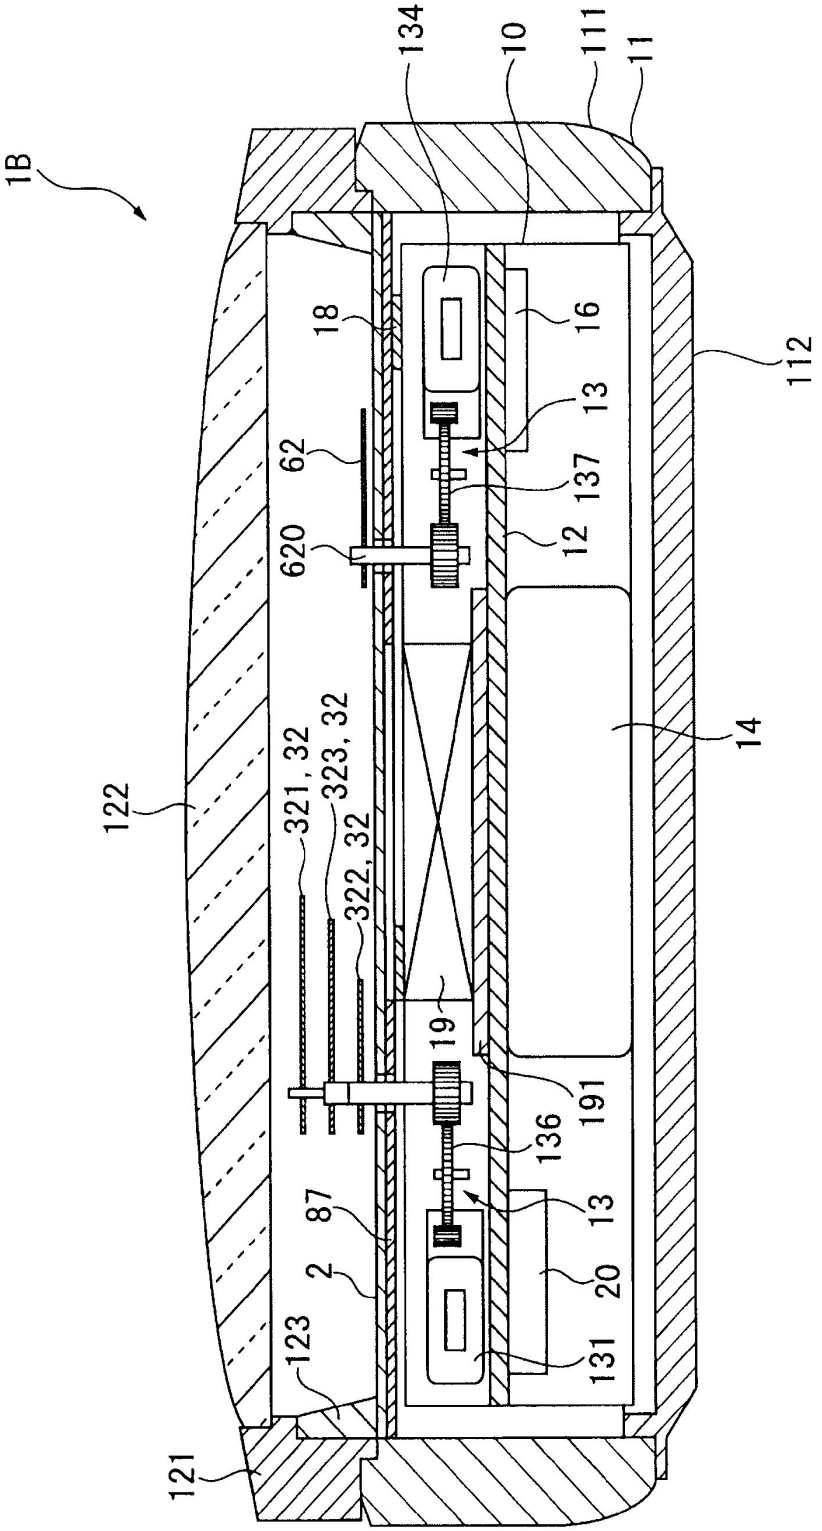

1B
134
10
111
11
18
16
112
13
62
137
12
620
14
122
321, 32
323, 32
322, 32
19
191
136
87
13
2
20
123
131
121

FIG. 7

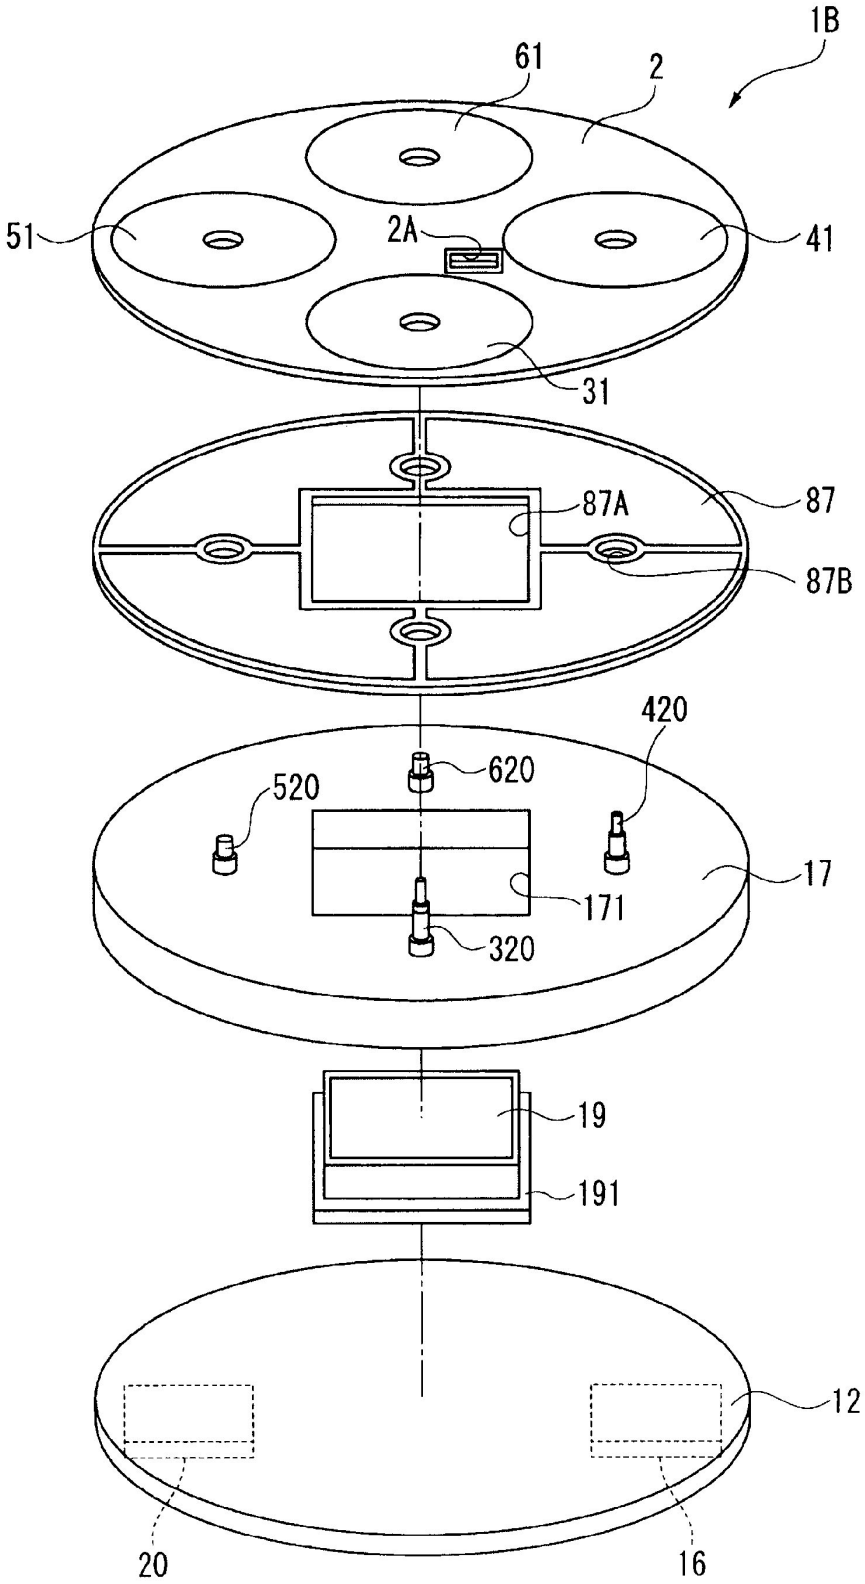


FIG. 8

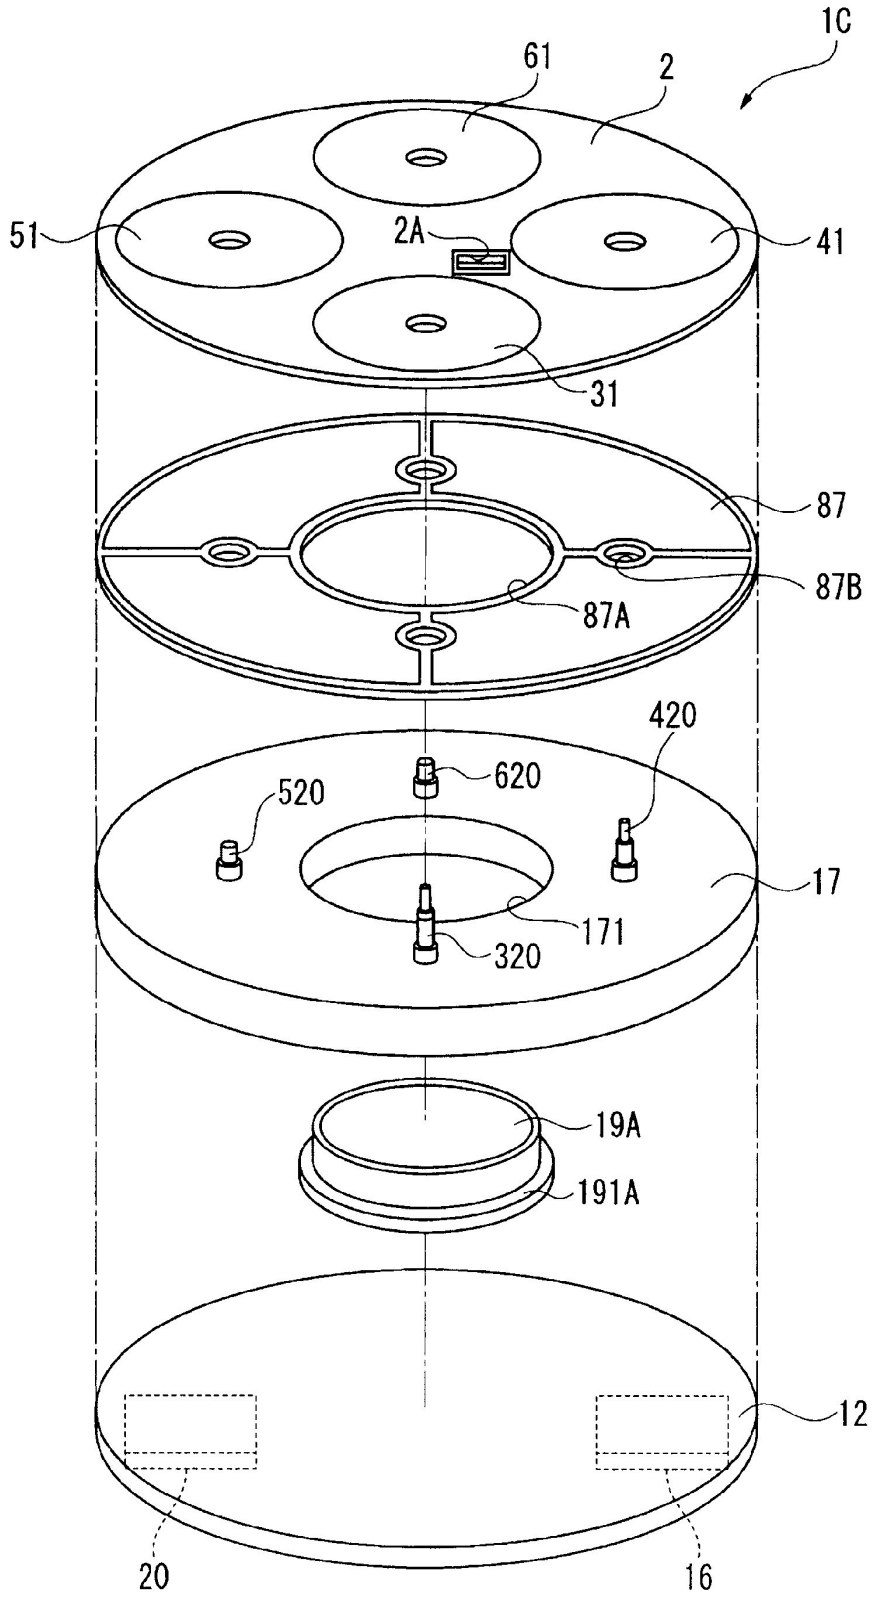

1C
61
2
51
2A
41
31
87
87B
87A
420
520
620
17
171
320
19A
191A
12
20
16

FIG. 9

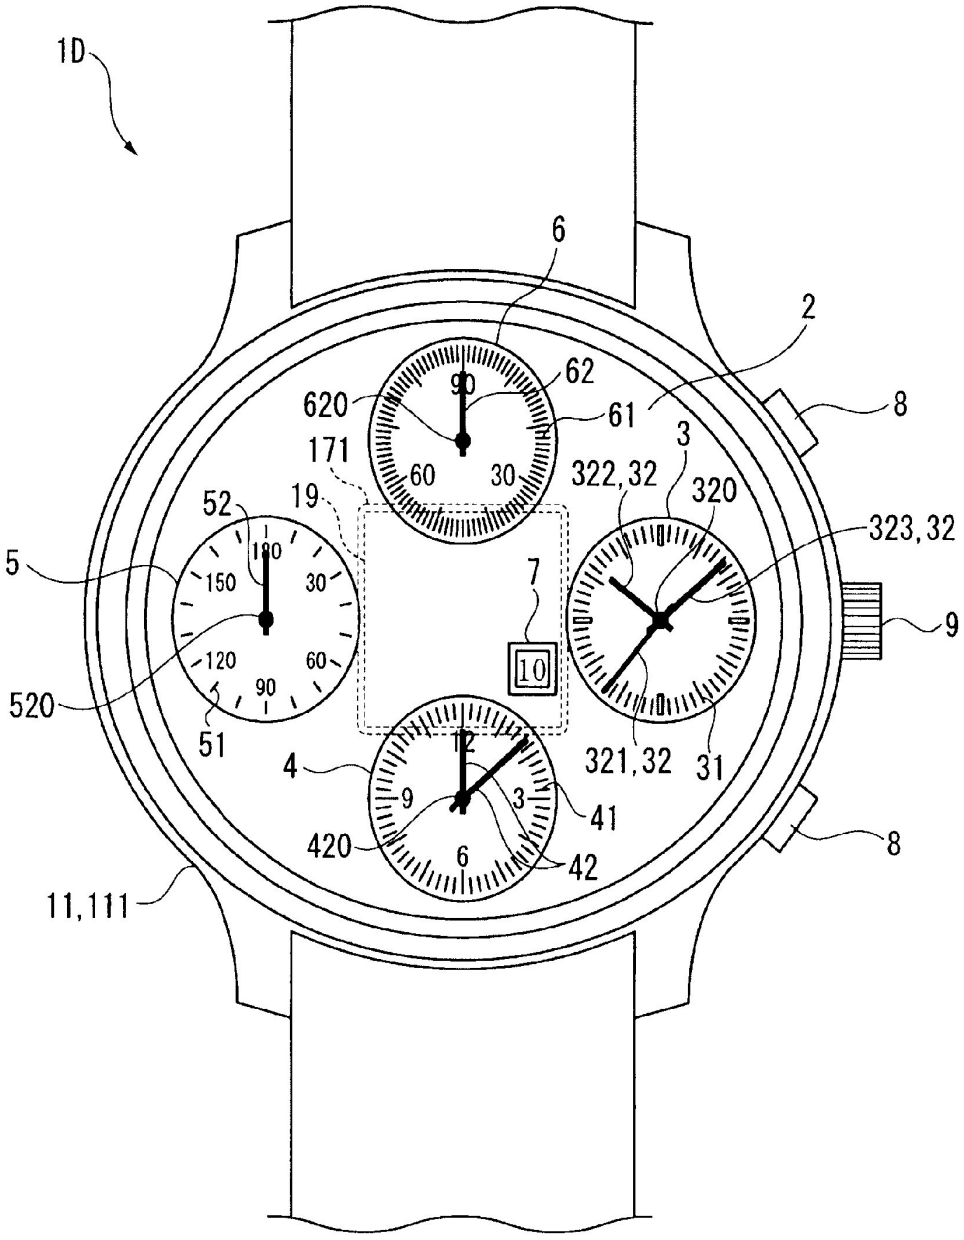

1D
6
2
62
620
61
8
171
3
322,32
320
19
52
323,32
5
7
9
10
520
51
4
321,32
31
41
420
42
8
11,111

FIG.10

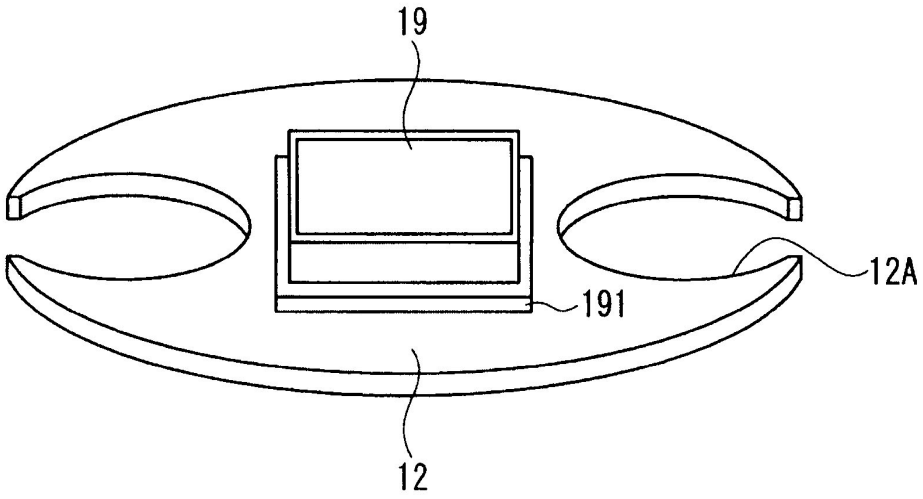


FIG.11

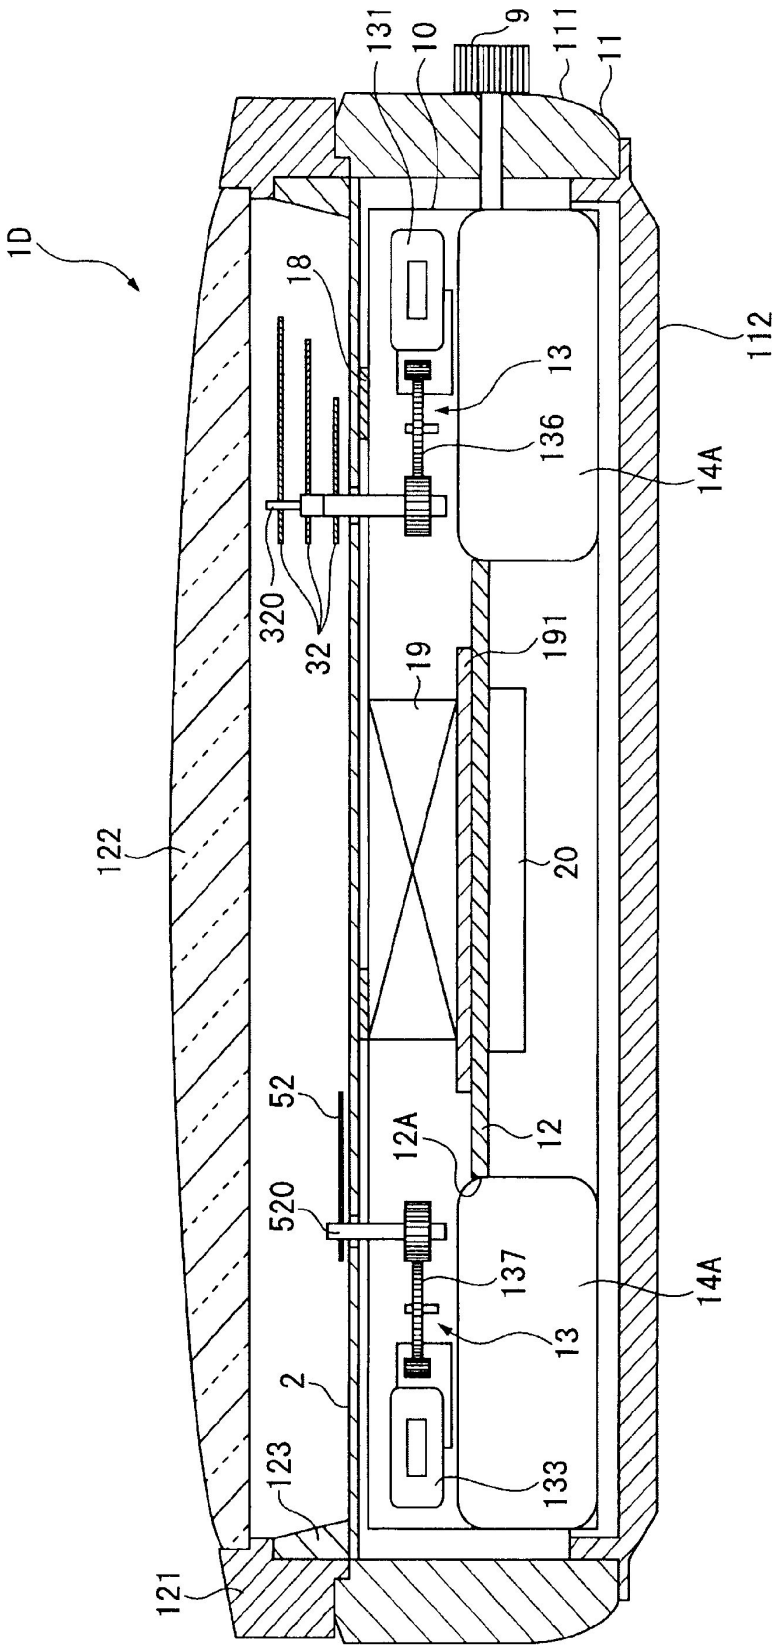

1D
131
10
9
111
11
18
112
13
136
14A
320
32
19
191
122
20
52
12A
12
520
137
14A
13
2
123
133
121

FIG.12

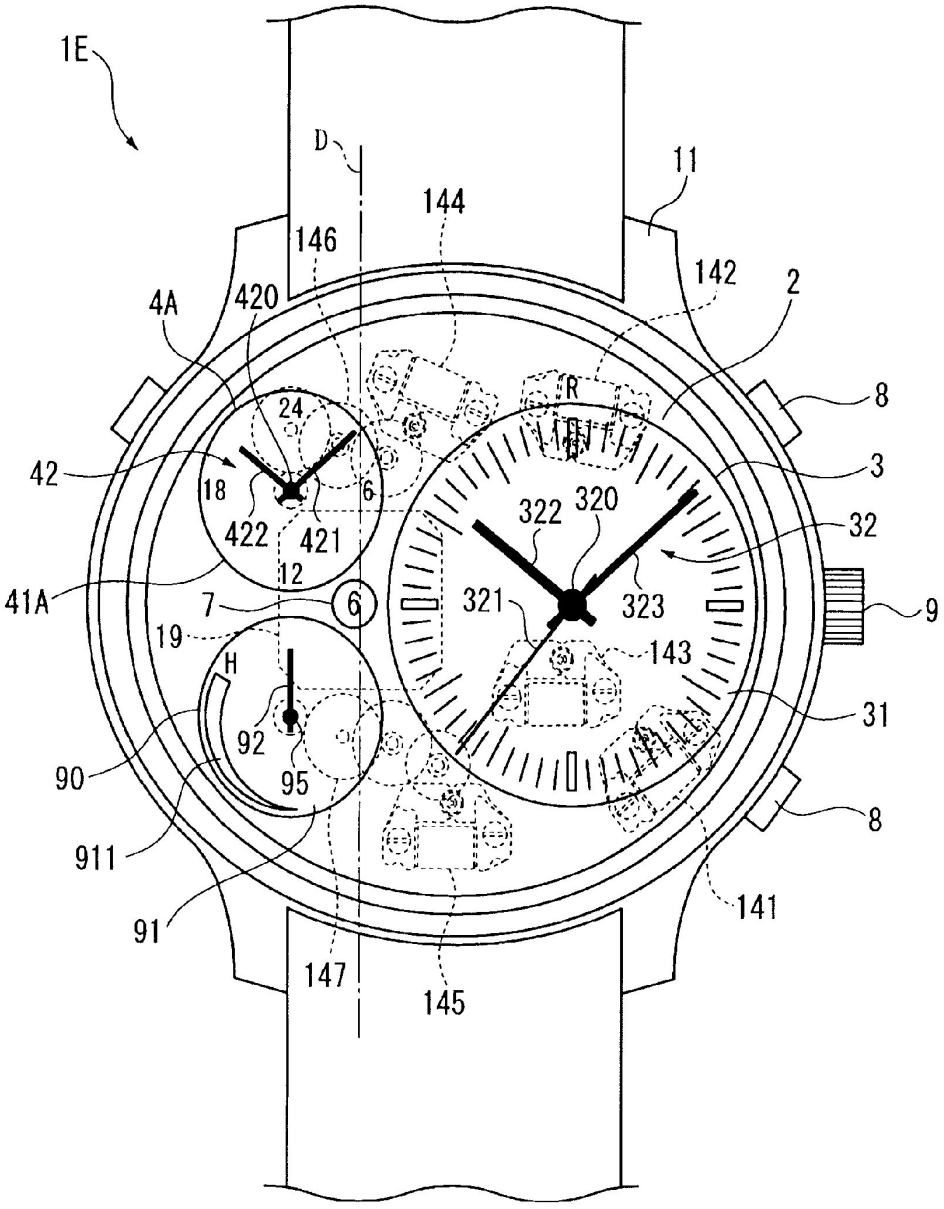

1E
D
11
144
146
142
2
4A
420
8
24
42
3
18
6
322
320
422
421
32
12
41A
7
6
321
323
9
19
143
H
31
92
90
95
8
911
91
141
147
145

FIG.13

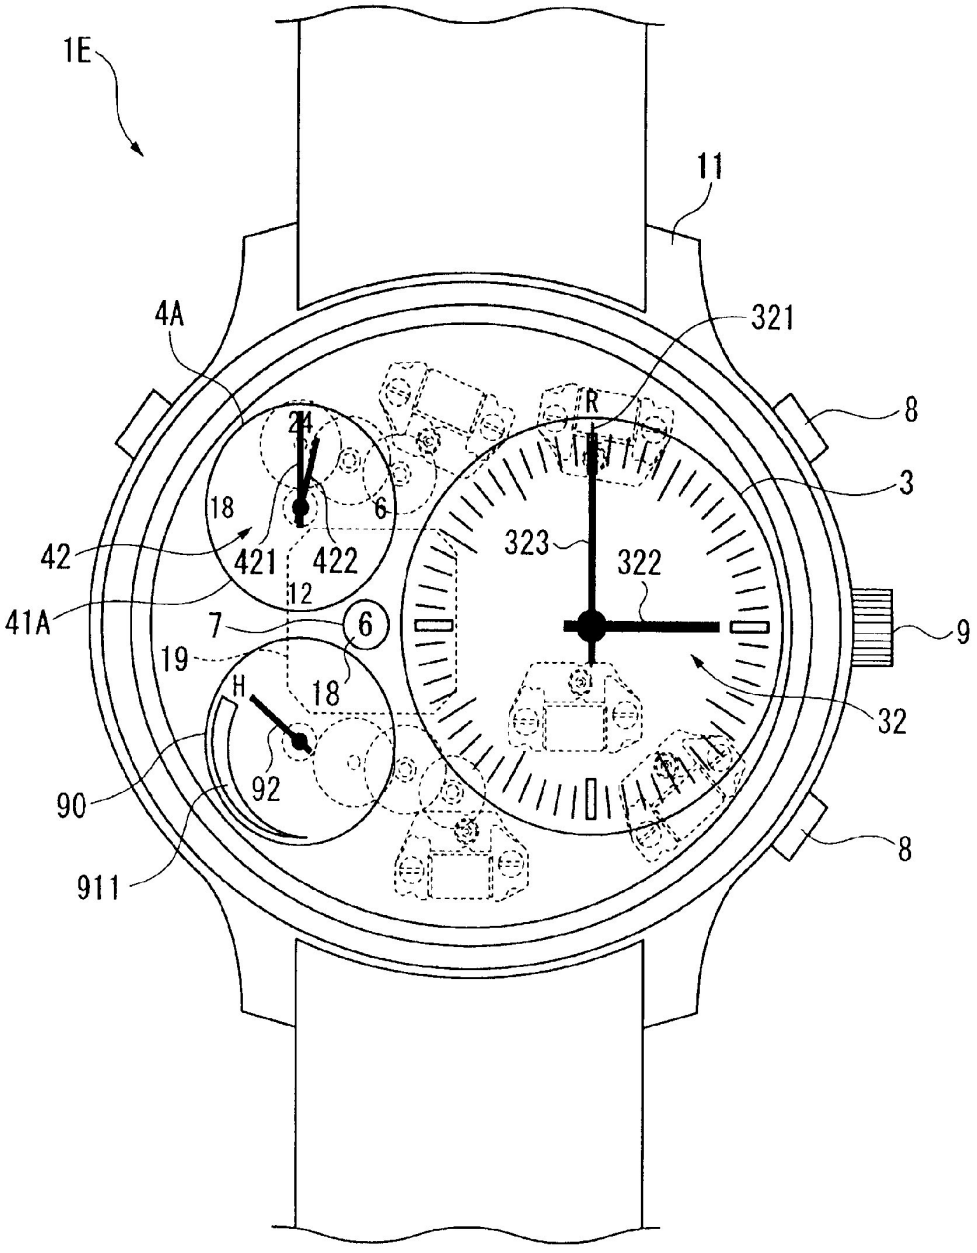

1E
11
4A
321
8
3
42
421
422
18
6
323
322
41A
12
7
6
19
18
9
H
32
90
92
911
8

FIG.14

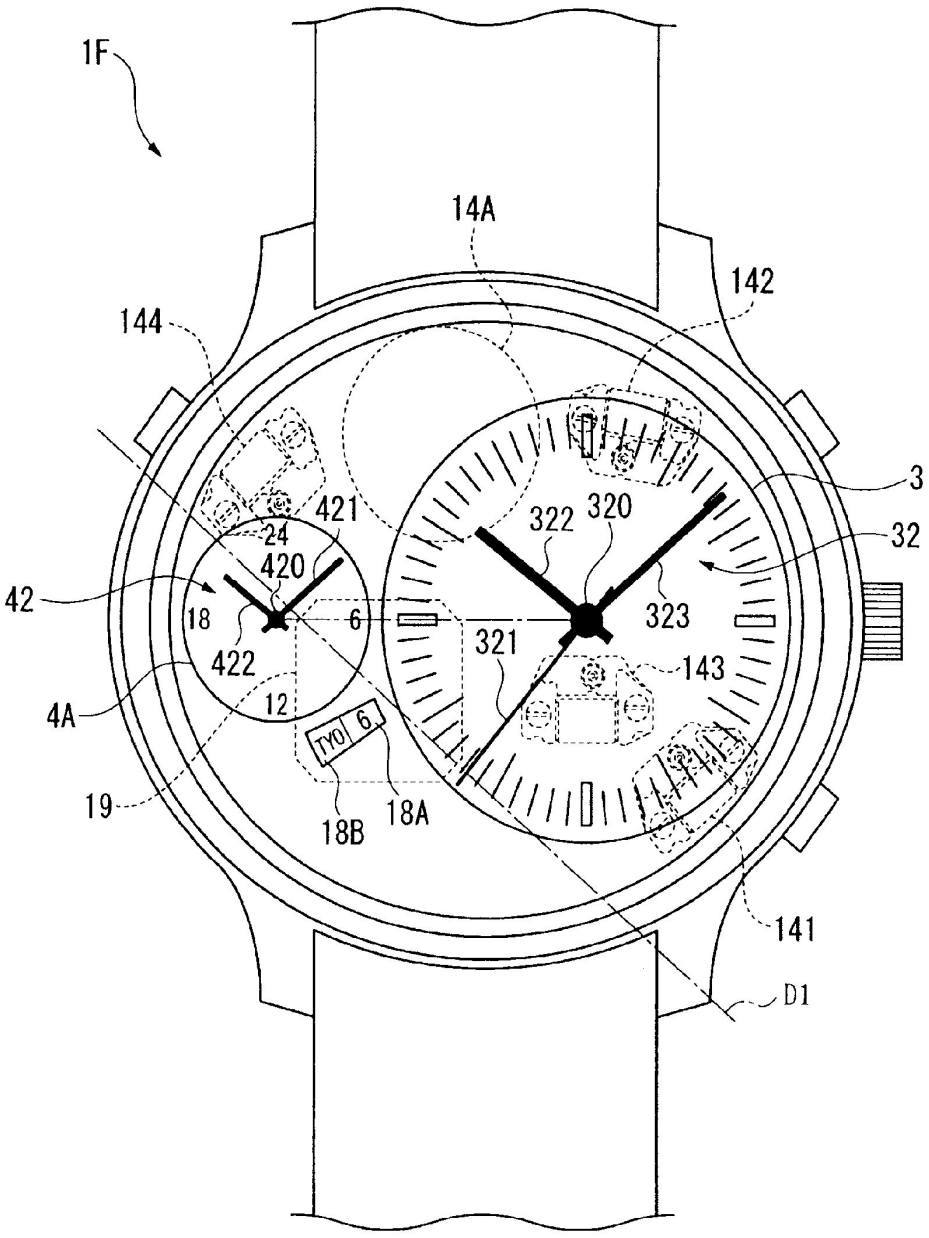

1F
14A
142
144
3
32
421
24
420
42
18
6
322
320
323
321
143
422
12
4A
TYO
6
19
18B
18A
141
D1

FIG.15

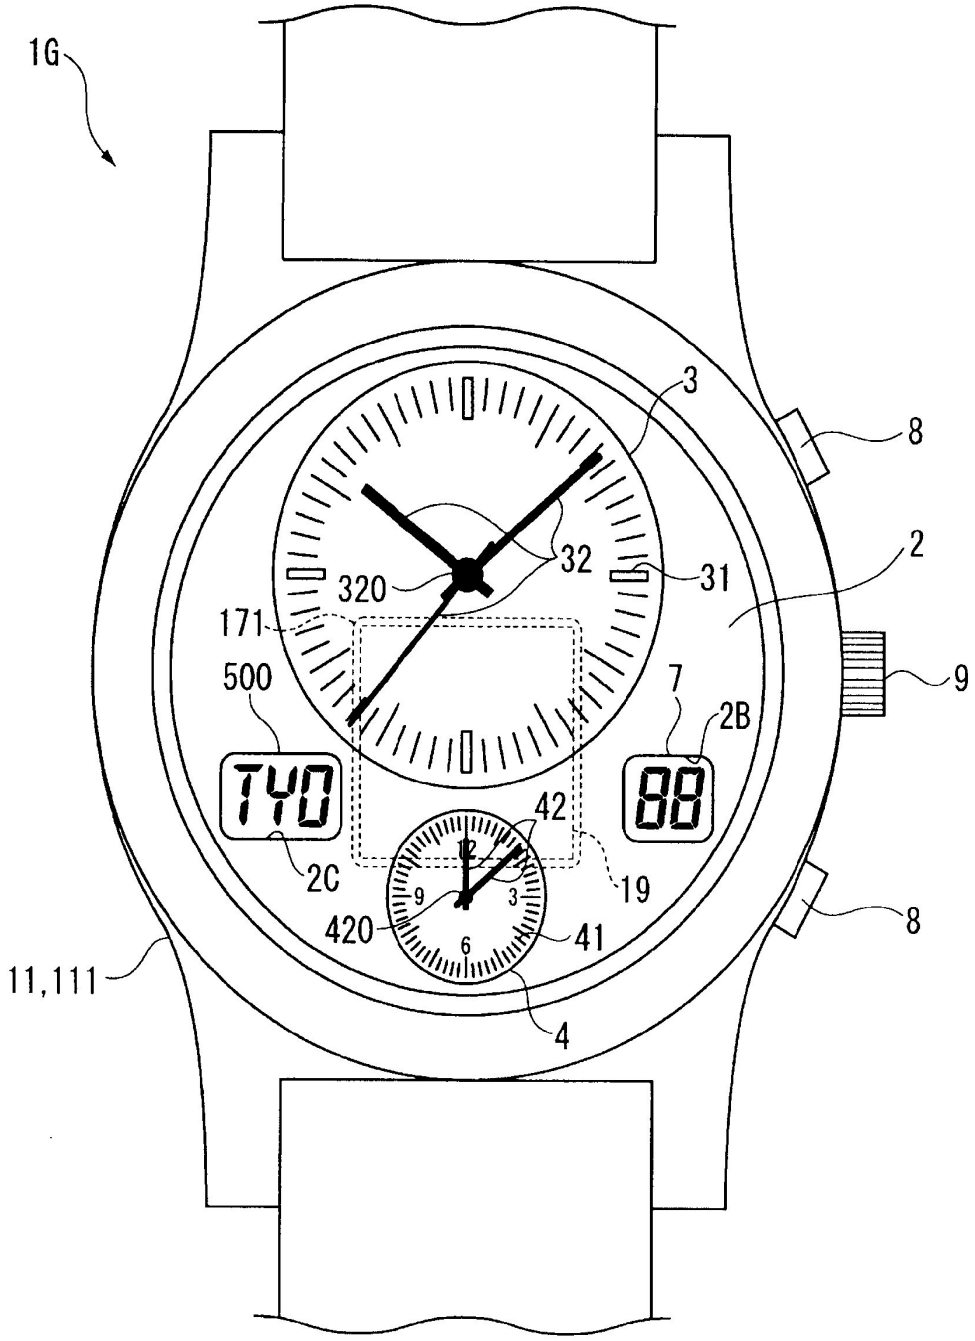


FIG.16

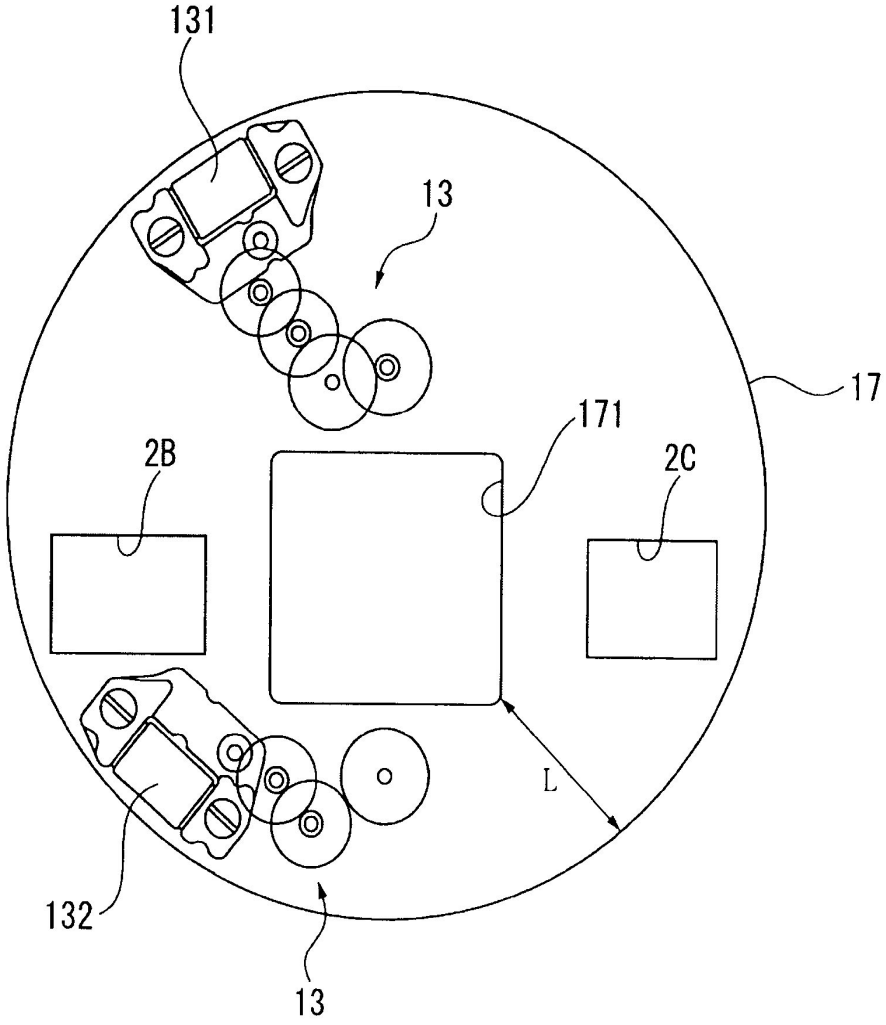


FIG.17

TIMEPIECE WITH INTERNAL ANTENNA

CROSS-REFERENCE TO RELATED APPLICATION(S)

Japanese Patent Application Nos. 2009-201557, filed Sep. 1, 2009, and 2010-143886, filed Jun. 24, 2010, are hereby incorporated by reference in their entirety.

BACKGROUND

1. Field of Invention

The present invention relates to a timepiece with an internal antenna, and more particularly to a timepiece with a built-in patch antenna (microstrip antenna) that receives radio frequency signals transmitted from an external source.

2. Description of Related Art

Timepieces that have an antenna for receiving radio frequency signals are known from the literature. Included in these RF signals are satellite signals transmitted from positioning information satellites, for example.

A wristwatch that has a patch antenna for receiving satellite signals as taught in JP-T-2007-526985 (Japanese translation of PCT international application JP-A-2007-526985) is an example of a timepiece with an internal antenna.

More specifically, JP-T-2007-526985 describes a wristwatch case rendered by a cylindrical metal external case member with a bottom. A bezel made of a material (such as plastic) through which RF signals pass easily is connected to the top side (open side) of the external case member, and a crystal is disposed inside the bezel.

With this wristwatch, the drive staff of the hands that display the time is disposed in the center of the surface of the dial. When the case is metal, the patch antenna inside the case is preferably disposed as close as possible to the face side of the timepiece, that is, the dial, so that RF signals can be received through the face side of the timepiece.

As a result, the patch antenna must be disposed between the drive staff and the inside circumference surface of the case. The patch antenna described in JP-T-2007-526985 is therefore disposed to a position offset from the plane center of the case toward the 12:00 o'clock position of the dial.

Because the patch antenna is a flat antenna, the thickness can be reduced and increase in the timepiece thickness can be suppressed when the patch antenna is incorporated inside the wristwatch.

However, in order to ensure the necessary reception performance, the patch antenna must have a plane area of a certain size. Recent technological advances in dielectric materials and radio sensitivity have enabled reducing the size of the patch antenna to some degree, but further reduction in size is complicated by the need to ensure the required reception performance. The plane area of a wristwatch must also be kept to a size that enables wearing on the wrist.

Therefore, when the patch antenna is located between the inside circumference surface of the case and the drive staff located in the plane center of the timepiece, the patch antenna is disposed adjacent to the case as shown in FIG. 1 and FIG. 2 in JP-T-2007-526985.

However, signal reception by the patch antenna will be easily affected if a case made from metal or other conductive material is adjacent to the side of the antenna (the outside circumference side facing the inside circumference surface of the case), and reception performance will drop. Reception performance is therefore assured in JP-T-2007-526985 by extending the bottom edge of the bezel to near the bottom surface of the patch antenna so that the side of the patch antenna is covered by the bezel.

In addition to practical functionality such as displaying the time and communication, however, timepieces, and particularly wristwatches, also need an appearance of quality. Such timepieces therefore generally use a metal material on the outside of the case.

However, a problem with the timepiece taught in JP-T-2007-526985 is that the plastic bezel occupies a large area and the quality of the timepiece therefore appears lower.

On the other hand, if a metal case is used to improve the appearance of quality, reception performance drops because the patch antenna is adjacent to a metal case as described above. More specifically, because the patch antenna is unidirectional, it is preferable to an non-directional antenna when RF signals are received through the open side of the metal case, that is, from the crystal and dial side of the timepiece.

Even so, because the patch antenna works on the same principle as a slot antenna and the strongest signals are emitted from the gap between the end of the top conductor (antenna end) and the ground plane, performance drops sharply if metal is close to the side of the patch antenna. A significant drop in the reception performance of the antenna is therefore a problem.

SUMMARY OF INVENTION

A timepiece with an internal antenna according to the present invention can ensure good reception performance even when the outside case is metal.

A first aspect of the invention is a timepiece with an internal antenna, including: a case that is made from a conductive material; a movement that is housed in the case and has a plurality of motors that drive staffs disposed at a plurality of locations; a dial that is made from a nonconductive material; and a patch antenna that is disposed inside the case on the back side of the dial, receives radio signals transmitted from an external source, and includes a dielectric and an electrode formed in the dielectric; wherein the patch antenna is disposed separated at least a specific distance from the inside surface of the case, and the staffs are disposed between the case and the patch antenna.

The staffs commonly have hands for indicating the hour, minute, and second attached thereto for displaying the time, but may display other information such as the date, weekday, longitude, or latitude.

In this aspect of the invention the patch antenna is separated at least a specific distance from the inside surface of the case. Because the antenna is not proximal to the case in this configuration, the effect of a conductive case can be reduced and a drop in reception performance can be prevented even when the case is made from a conductive material (such as metal).

That the antenna is separated at least a specific distance from the inside surface of the case means that the smallest gap between the outside surface of the antenna and the inside surface of the case is greater than or equal to the specific dimension. Therefore, the largest gap can be achieved by disposing the antenna in the plane center of the case. Note, further, that the plane of the timepiece (case) as used herein means a plane perpendicular to the thickness of the timepiece, and is normally a plane parallel to the dial surface.

The specific dimension, that is, the distance from the inside surface of the case to the outside surface of the antenna, may be set to the dimension required to assure the reception performance required by the antenna built in to the timepiece with consideration for deterioration of performance with proximity to the case.

Furthermore, because the antenna can be disposed at least the specific dimension away from the inside surface of the case even when the top edge of the case is set to substantially the same elevation as the top surface of the patch antenna, the antenna can receive not only radio waves incident thereto from above, but also radio signals that are incident from left and right diagonal directions without interference from the case. Compared with the related art, therefore, a larger portion of the appearance of the timepiece can be occupied by metal materials, and the appearance of the timepiece can be improved while maintaining desirable reception performance in the antenna.

In addition, because the staffs can be located in the space between the antenna and the case when the antenna is disposed separated at least a specific dimension from the inside surface of the case, space can be used effectively and timepiece size can be reduced.

Note that the staffs have little effect on reception performance when disposed near the patch antenna even when made of metal because they are slender pin-like members. If the staffs are plastic or other nonconductive material, the effect on the reception performance of the patch antenna can be further reduced.

In addition, the specific dimension is large enough to ensure the desired reception performance and is preferably set to a size (dimension) that enables disposing the staffs.

Note that this size (dimension) that enables disposing the staffs means a dimension that enables disposing at least the staffs and the wheels that mesh with the staffs in the wheel trains for driving the staffs between the antenna and the case.

Because the smallest gap between the antenna and the case in this configuration is large enough to accommodate placing a staff therein, the staffs can be disposed where desired around the antenna and the freedom of the layout of the timepiece hands can be improved.

In a timepiece with an internal antenna according to another aspect of the invention, at least two display units including a first display unit and a second display unit are formed as plane circles with a staff in the plane center thereof on the surface of the dial; the diameter of the first display unit is greater than the diameter of the second display unit; and the patch antenna is disposed to a position superimposed in plan view on a line connecting the staff of the first display unit and the staff of the second display unit.

Because the diameter of the first display unit is greater than the diameter of the second display unit in this aspect of the invention, large hands can be attached to the staff of the first display unit. As a result, if the time at the current location is displayed on the first display unit, the current time at the current location can be easily checked and usability can be improved.

Furthermore, because at least a second display unit is also provided in addition to the first display unit, a dual-time display function that also displays the time in another preset location can be rendered, a status display function that indicates reception sensitivity or reserve power, for example, can be provided, and usability can be improved.

Yet further, because the patch antenna is disposed at a position superimposed in plan view on a line connecting the staff of the first display unit and the staff of the second display unit, space between the staffs can be used effectively. In addition, the staffs of the display units will be disposed between the patch antenna and the inside surface of the case, and a distance equal to or greater than the radius of each display unit can be assured between the patch antenna and the inside surface of the case. As a result, the patch antenna can be easily separated at least the specific dimension from the inside surface of the case.

Further preferably in a timepiece with an internal antenna according to another aspect of the invention, the dial is a shape with different vertical and horizontal dimensions on the dial surface; a third display unit formed as a plane circle with a staff in the plane center thereof is formed on the dial surface in addition to the first display unit and second display unit; the diameter of the third display unit is less than the diameter of the first display unit; and the patch antenna is located between the staff of the second display unit and the staff of the third display unit in the shorter of the vertical and horizontal directions of the dial, and on the longer of the vertical and horizontal directions of the dial is offset from the staff of the first display unit toward the staff of the second and third display units.

The dial in this aspect of the invention may be a plane ellipse, a plane rectangle, a shape combining a rectangle and a semicircle, or a shape combining a rectangle and a semi-ellipse (dividing an ellipse into halves on the major axis or minor axis). Therefore, when the dial is a plane ellipse, for example, the direction with the longer dimension is the direction of the major axis of the ellipse, and the direction with the shorter dimension is the direction of the minor axis of the ellipse.

The vertical (top-bottom) direction of the dial surface means the direction connecting 12:00 and 6:00 on the dial, and the horizontal (left-right) direction means the direction connecting 3:00 and 9:00.

Because the patch antenna is disposed between the staffs in this configuration, the antenna will be separated from the case by more than the distance between the case and the staffs. So that the hands attached to the staffs do not touch the case, the staffs are usually separated from the case by at least the length of the hands.

With this aspect of the invention, therefore, the antenna can be separated from the case by at least the length of the hands, and the hands and antenna can be easily arranged.

Furthermore, due to the relative positions of the patch antenna and staffs, the plane center of the first display unit and the plane centers of the second display unit and third display unit are offset along the longer axis, and the plane centers of the second display unit and third display unit are offset along the shorter axis.

The display units can therefore be disposed in a balanced arrangement on the dial, the timepiece design can be improved, and a timepiece with an arrangement of hands that is different from a common analog timepiece having the staff in the plane center of the dial can be achieved.

Note that if the patch antenna is disposed separated at least a specific dimension from the case, and staffs disposed in a plurality of locations are disposed between the case and the patch antenna, the antenna may be disposed in the plane center of the timepiece dial, for example, and display units with the same diameter may be disposed around the antenna. This enables rendering timepieces with a different layout of hands than a common analog timepiece having the staff disposed in the plane center of the dial. Furthermore, because the staffs can be disposed to plural locations around the antenna, a timepiece that can display other information in addition to time can be easily achieved.

Further preferably in a timepiece with an internal antenna according to another aspect of the invention, a timekeeping means that keeps time internally; a scheduled reception means that starts reception using the patch antenna when the internal time reaches a specific time; and a motor drive con-

trol means that controls driving the motor; wherein the plural staffs include a staff to which is attached a hand that displays time based on the internal time and includes in its path of movement a position where the hand overlaps the patch antenna in plan view, and a staff to which is attached a hand that displays information other than time and includes in its path of movement a position where the hand overlaps the patch antenna in plan view; the scheduled reception means starts scheduled reception at a time when a hand that displays the time does not overlap the patch antenna in plan view; and the motor drive control means moves the hand that displays information other than time to a position not overlapping the patch antenna in plan view while scheduled reception by the scheduled reception means is in progress.

Because a time when a hand that indicates the time is not superimposed in plan view on the patch antenna is set as the scheduled reception time, a hand that indicates the time will not overlap the antenna in plan view during the scheduled reception, and will not affect reception by the antenna even when metal hands are used.

In addition, because the hand that indicates information other than time, such as the reception level, is moved by the motor drive control means to a position not overlapping the patch antenna in plan view during scheduled reception, the hand can be prevented from affecting reception by the antenna.

Therefore, a drop in reception sensitivity can be prevented even when metal hands are used because the hands do not overlap the patch antenna in plan view during reception.

A configuration in which the hands for displaying the time move to a position not overlapping the patch antenna in plan view during scheduled reception is also conceivable. In this configuration, however, reception cannot start until the hands move, and the time cannot be displayed during reception.

However, because the hands that display the time do not overlap the patch antenna in plan view when displaying the current time, there is no need to move the hands that display the time and the reception process can be started quickly while continuing to display the current time.

In a timepiece with an internal antenna according to another aspect of the invention, the specific dimension is an amount that enables disposing the motors therein.

If the specific dimension, that is, the minimum size of the gap between the outside surface of the patch antenna and the inside surface of the case, is large enough to enable disposing the motors therein, the motors can be disposed anywhere around the antenna and the layout of the motors and hands driven by the motors can be arranged more freely.

In addition, because the plural motors that are the drive source for driving the hands can be disposed between the inside surface of the case and the outside surface of the patch antenna, the antenna and the plural motors will not overlap in the thickness direction of the timepiece. As a result, the thickness of the timepiece can be reduced compared with a timepiece configured with the patch antenna and motors overlapping the thickness direction. More specifically, because the antenna and motors are relatively thick compared with other timepiece parts, the timepiece thickness can be greatly reduced by placing these where they do not overlap in plan view.

Further preferably in a timepiece with an internal antenna according to another aspect of the invention, the dial is transparent; a solar panel that receives light and generates power is disposed on the back side of the dial; and an opening is formed in the solar panel at a position overlapping the patch antenna in plan view.

Because this aspect of the invention uses a transparent dial and disposes a solar panel on the back side of the dial, the timepiece can be driven using power generated by the solar panel. As a result, unlike when a primary battery is used, there is no need to replace the battery and user convenience can be improved.

Furthermore, while the substrate of the solar panel is thin, it attenuates high frequency radio waves such as GPS satellite signals because it is metal. The possibility of not being able to receive signals therefore increases when the patch antenna is covered by the solar panel.

However, because this aspect of the invention renders an opening in the solar panel, radio waves can be incident to the patch antenna through this opening. The patch antenna can therefore receive signals that do not pass through the solar panel, attenuation of the received signals by the solar panel can be prevented, and reception performance can be improved accordingly.

Further preferably, a timepiece with an internal antenna according to another aspect of the invention also has a date wheel that is made from a nonconductive material and is disposed on the back side of the solar panel; a date window for exposing the date display of the date wheel is formed in the dial; and the date window is formed at a position overlapping the opening in the solar panel in plan view.

Because the date wheel is made from a nonconductive material and does not affect reception by the patch antenna, the date wheel can be disposed to a position overlapping the antenna in plan view.

Furthermore, because the date window disposed in the dial for exposing the date shown on the date wheel, that is, the numbers 1 to 31, is located at a position overlapping the opening in the solar panel in plan view, a separate opening for exposing the date wheel does not need to be formed in the solar panel, the light-collecting surface area can therefore be increased compared with a configuration having another opening, and power generating performance can be improved.

More specifically, when the date wheel is disposed on the back side of the solar panel, an opening must also be formed in the solar panel so that the displayed date can be seen through the date window.

Because the date window is positioned in the opening rendered in the solar panel in this aspect of the invention, the date displayed on the date wheel can be read from the date window through this opening. There is therefore no need to render a separate opening for the date wheel in the solar panel, and the light-collecting surface area can be increased accordingly.

Further preferably, a timepiece with an internal antenna according to another aspect of the invention also has a plurality of batteries that supply power to the motors and are disposed to a position in the case not overlapping the patch antenna in plan view.

Because this aspect of the invention has a plurality of batteries, the size of each battery, such as the diameter, can be reduced compared with a configuration having one battery while still assuring the same battery capacity.

A great increase in the plane size of the timepiece can therefore be prevented even with a layout in which the patch antenna and batteries do not overlap in plan view.

In addition, because the antenna and batteries do not overlap in plan view, the motors and batteries can be disposed between the outside surface of the antenna and the inside surface of the case. Compared with a configuration in which the antenna and batteries overlap through the timepiece thickness, the thickness of the timepiece can therefore be reduced.

Further preferably in a timepiece with an internal antenna according to another aspect of the invention, the patch antenna is rendered on a circuit board that functions as a ground plate.

A patch antenna is a flat, unidirectional antenna with narrow directivity, but because the circuit board on which the patch antenna is mounted also functions as a ground plate, radio waves incident from an external source can be reflected by the circuit board and guided to the antenna. As a result, the antenna can receive not only radio waves that are directly incident to the antenna, but also signals that are reflected by the circuit board and indirectly incident. The reception performance of the antenna can therefore be further improved.

Further preferably in a timepiece with an internal antenna according to another aspect of the invention, the patch antenna receives circularly polarized radio waves transmitted from a positioning information satellite.

Examples of circularly polarized waves include satellite signals transmitted from positioning information satellites such as GPS (Global Positioning System), Galileo (a European satellite navigation system), and SBAS (Satellite-Based Augmentation System) satellites.

Because the patch antenna of the invention receives circularly polarized waves, signals can be reliably received anywhere on Earth from positioning information satellites and the correct time can always be maintained if the timepiece has a function for correcting the time using time information contained in the satellite signals.

Other objects and attainments together with a fuller understanding of the invention will become apparent and appreciated by referring to the following description and claims taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** shows a GPS wristwatch according to the first embodiment of the invention.

FIG. **2** is a plan view of the GPS wristwatch.

FIG. **3** is a section view of the GPS wristwatch.

FIG. **4** is a plan view of the movement assembled into the GPS wristwatch.

FIG. **5**A is a section view showing the structure of the patch antenna, and FIG. **5**B shows the radiation pattern of the patch antenna.

FIG. **6** is a block diagram of the circuit configuration of the GPS wristwatch.

FIG. **7** is a section view of a GPS wristwatch according to a second embodiment of the invention.

FIG. **8** is an exploded oblique view schematically showing the main parts related to the second embodiment.

FIG. **9** is an exploded oblique view schematically showing the main parts related to a third embodiment of the invention.

FIG. **10** is a plan view of a GPS wristwatch according to a fourth embodiment of the invention.

FIG. **11** is an oblique view of the circuit board according to the fourth embodiment of the invention.

FIG. **12** is a section view of the GPS wristwatch according to the fourth embodiment of the invention.

FIG. **13** is a plan view of a GPS wristwatch according to a fifth embodiment of the invention.

FIG. **14** is a plan view of the GPS wristwatch according to the fifth embodiment of the invention.

FIG. **15** is a plan view of a GPS wristwatch according to a sixth embodiment of the invention.

FIG. **16** is a plan view of a GPS wristwatch according to another embodiment of the invention.

FIG. **17** is a back side view of the movement assembled into a GPS wristwatch according to the other embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiment 1

A first embodiment of the invention is described below with reference to the accompanying figures.

FIG. **1** shows a GPS wristwatch **1**A according to a preferred embodiment of a timepiece with an internal antenna according to the invention.

As shown in FIG. **1**, the GPS wristwatch **1**A is configured to adjust the internally kept time by receiving satellite signals and acquiring satellite time information from a plurality of GPS satellites S orbiting the Earth in space on specific orbits.

Note that the GPS satellites S are an example of a positioning information satellite in the invention, and a plurality of satellites orbit the Earth in space. Today there are approximately 30 GPS satellites S in orbit.

Operating buttons **8** for external operations and a crown **9** are also disposed to the GPS wristwatch **1**A.

Configuration of a GPS Wristwatch

FIG. **2** is a is a plan view of the GPS wristwatch **1**A. FIG. **3** is a section view of the GPS wristwatch **1**A. FIG. **4** is a plan view of the movement **10**.

The GPS wristwatch **1**A has a dial **2** made from a non-conductive plastic material such as polycarbonate.

The GPS wristwatch **1**A also has a first time display unit **3**, a second time display unit **4**, a longitude display unit **5**, a latitude display unit **6**, and a date display unit **7** each rendered by a chapter ring and one or more hands and disposed to the dial **2**.

The first time display unit **3** has a round chapter ring **31** disposed at 6:00 o'clock on the dial **2**, and first hands **32**. The chapter ring **31** has 60 markers disposed around the outside edge.

The first hands **32** are made of metal, are supported on a three-part staff **320** passing through the center of the first time display unit **3**, and include a first second hand **321**, a first minute hand **323**, and a first hour hand **322**.

The staff **320** to which the first second hand **321**, first hour hand **322**, and first minute hand **323** are attached is driven by a stepper motor **131** described below.

Similarly to the first time display unit **3**, the second time display unit **4** includes a round chapter ring **41** disposed at 3:00 o'clock on the dial **2**, and second hands **42**. The chapter ring **41** is divided into 60 markers around the outside edge.

The second hands **42** are metal, supported on a two-part staff **420** passing through the center of the second time display unit **4**, and include a second minute hand **421** and second hour hand **422**.

The staff **420** to which the second minute hand **421** and second hour hand **422** are attached is also driven by a stepper motor **132** described below.

This configuration enables displaying the current time in two different time zones, that is, a so-called dual time display, by means of the first time display unit **3** and second time display unit **4**. For example, the local time when on a trip could be displayed on the first time display unit **3** while the local time in the user's home country could be displayed using the second time display unit **4**.

The longitude display unit **5** includes a round chapter ring **51** disposed at 9:00 o'clock on the dial **2**, and a longitude hand **52**. The chapter ring **51** is divided into 18 markers around the outside edge.

The hand **52** is metal, supported on a staff **520** passing through the center of the longitude display unit **5**, and is driven by a stepper motor **133** described below.

Note that when positioning information is not displayed in the longitude display unit **5**, the remaining battery capacity may be displayed by the hand **52**.

The latitude display unit **6** includes a round chapter ring **61** disposed at 12:00 o'clock on the dial **2**, and a latitude hand **62**. The chapter ring **61** is divided into 90 markers around the outside edge.

The hand **62** is metal, supported on a staff **620** passing through the center of the latitude display unit **6**, and is driven by a stepper motor **134** described below.

Note that when positioning information is not displayed in the latitude display unit **6**, the day of the week may be displayed by the hand **62**. In this configuration the chapter ring **61** may display markers for the days of the week.

The date display unit **7** has a rectangular date window **2**A disposed near the center of the dial **2**, and a date wheel **18** disposed behind the dial **2**. The date window **2**A is offset from the center of the dial **2** towards the 4-5:00 o'clock position near the first time display unit **3** and second time display unit **4**. The date wheel **18** is driven by a stepper motor **135** described below, and a date (day number) printed on the date wheel **18** is exposed and displayed from the date window **2**A.

Internal Configuration of the GPS Wristwatch

As shown in FIG. **2** and FIG. **3**, the GPS wristwatch **1**A includes a movement **10** that drives hands **32**, **42**, **52**, and **62**, and an external case **11** that houses the movement **10**.

The case **11** includes a cylindrically shaped case member **111**, and a back cover **112** that closes one open end of the case **11** (the bottom end in FIG. **3**).

The back cover **112** includes an annular metal first back cover part **112**A, and a round glass second back cover part **112**B that is held by the first back cover part **112**A. The first back cover part **112**A is held by a threaded connection to the end of the case member **111**.

The case member **111** and first back cover part **112**A are made from a conductive metal such as SUS (stainless steel) or titanium alloy.

The movement **10** includes a circuit board **12**, drive mechanism **13**, storage cell **14**, base plate **17**, and patch antenna **19**.

The circuit board **12** is populated with circuit devices including a control unit (control module) **16** that controls the drive mechanism **13**, and a receiver unit (GPS reception module) **20** that processes signals received from GPS satellites S. More specifically, as shown in FIG. **3**, the receiver unit **20** is mounted to the bottom side of the circuit board **12** (the opposite side as the patch antenna **19**). Because metal circuit patterns are formed on the circuit board **12**, noise emitted from a crystal oscillator circuit **23** disposed to the receiver unit **20** as described below (see FIG. **6**) can be blocked by the circuit board **12**. Therefore, compared with disposing the receiver unit **20** on the top side of the circuit board **12**, the effect of noise on the patch antenna **19** can be reduced and reception performance can be improved. Space can also be used efficiently because the receiver unit **20** is placed in the dead space (the space around the storage cell **14**) on the bottom side of the circuit board **12**. In addition, because the receiver unit **20** is located where it does not overlap the storage cell **14** in the plane direction, the thickness of the GPS wristwatch **1**A can be reduced.

The drive mechanism **13** includes the foregoing stepper motors **131** to **135**, wheel trains **136** and **137** that transfer drive power from the stepper motors **131** to **135** to the staffs **320**, **420**, **520**, **620** and the **18**, and a drive circuit **130** (see FIG. **6**) that drives the stepper motors **131** to **135** according to control signals from the control unit **16**. The motor drive control means of the invention is thus rendered by the drive circuit **130**.

The hands **32**, **42**, **52**, **62** and date wheel **18** are driven by the drive mechanism **13** to display such information as the time, longitude, and latitude.

The storage cell **14** is a rechargeable battery such as a lithium ion battery, and supplies power to the drive mechanism **13**, control unit **16**, and receiver unit **20**.

The base plate **17** is made of a nonconductive plastic material, and is disposed on the back side of the dial **2**. An opening **171** is formed in the middle of the base plate **17** as shown in FIG. **4**.

The date wheel **18** is disposed to the base plate **17**. The date wheel **18** is made of a nonconductive plastic material and formed in the shape of a ring. The numbers 1 to 31 are printed on the date wheel **18** to display the day number. Because markers for 31 days must be printed, each number will be small and difficult to read if the diameter of the date wheel **18** is too small.

As a result, the diameter of the date wheel **18** is greater than half the diameter of the dial **2** and base plate **17** as shown in FIG. **4**. The date wheel **18** is disposed according to the position of the date window **2**A in the dial **2** so that part of the date wheel **18** will be positioned in the opening **171**, a number printed on the date wheel **18** will be exposed from the date window **2**A of the dial **2**, and the date can be read from the outside.

The patch antenna **19** receives circularly polarized signals transmitted from positioning information satellites in this embodiment of the invention. The patch antenna works by emitting a strong field along the edges of the patch (antenna conductor) into space from the edges of the patch (towards the transmitting antenna), and the top surface of the antenna as well as the sides of the antenna must therefore be separated several millimeters from metal. A patch antenna according to the invention refers to a flat antenna having the ground plane and antenna conductor substantially parallel, and one side resonating at half wavelength, but also includes inverted-F antennae resonating at a quarter wavelength by shorting one side of the antenna conductor to the ground plane. An inverted-F antenna enables reducing the antenna size by halving the radiation conductor of a half wave patch antenna, but the operating principle relating to signal radiation from the antenna side is the same as a half wave patch antenna. So-called chip antennae rendering an inverted-F antenna on a ceramic dielectric package are also included in the patch antenna of the invention. More specifically, a patch antenna of the invention refers to the operating principle of the antenna.

More specifically, as shown in FIG. **5**A, a patch antenna **19** according to this embodiment of the invention is a patch antenna having a ceramic dielectric body **193** disposed on an antenna substrate **191** that is the ground plane, and a silver (Ag) conductive antenna feed **194** printed on the dielectric body **193**. Note that in FIG. **5**A dotted lines **195** denote the signals received by the patch antenna **19**, and arrows **196** denote lines of electric force.

To facilitate adjusting the frequency of the patch antenna **19**, the antenna substrate **191** is separate from the circuit board **12** on which the receiver unit **20**, that is, the GPS reception module, is mounted. The signal lines of the antenna substrate **191** of the patch antenna **19** are soldered to the circuit board **12** after frequency adjustment.

FIG. **5**B shows the radiation pattern of the patch antenna **19**. As shown in FIG. **3**, the plane of the patch antenna **19** is on axis X and the zenith is indicated by axis Z.

As shown in FIG. **5**B, the patch antenna **19** has the greatest directivity at the zenith in the direction of axis Z, and can most easily receive radio signals that are perpendicularly incident to the dial **2**. In addition, because directivity in the X axis direction, that is, to the sides of the patch antenna **19**, is less than on axis Z but is still strong, reception performance will be affected if the metal case **11** is proximal to the side of the patch antenna **19**.

However, because directivity in the -Z direction, that is, to the bottom of the patch antenna **19**, is weak, reception performance is less affected when a metal storage cell **14** is located therebelow when compared with a non-directional antenna with uniform directivity all around.

The patch antenna **19** is rectangular in plan view and is inserted to the rectangular opening **171** in the base plate **17**. As a result, part of the date wheel **18** is located on the top (dial **2**) side of the patch antenna **19**.

The patch antenna **19** is disposed to a position separated at least a specified distance from the inside circumference surface of the case member **111**. More specifically, as shown in FIG. **4**, at least a specified minimum gap L is rendered between the outside surface of the patch antenna **19** and the inside circumference surface of the case member **111**. Compared with a configuration in which the patch antenna **19** is located offset from the plane center, distance L can be set to the greatest distance possible in this embodiment of the invention because the patch antenna **19** is disposed in the plane center of the GPS wristwatch **1**A.

Note that the specific size of this "specified distance" may be set to assure the reception performance required by the GPS wristwatch **1**A with consideration for deterioration in reception performance with proximity of the patch antenna **19** to the metal case member **111**, and the angle of incidence range of the radio signals that can be received by the patch antenna **19** without being blocked by the case member **111**.

Note that in this embodiment of the invention the dial **2** is disposed at substantially the same elevation (height) as the top of the case member **111**, and the patch antenna **19** is disposed on the back side of the dial **2** with the date wheel **18** therebetween. As a result, the top surface of the patch antenna **19** is substantially even with the top surface of the case member **111**.

The stepper motors **131** to **135** and wheel trains **136** and **137** of the drive mechanism **13** are disposed between the patch antenna **19** and the inside surface of the case member **111**. As a result, this specified distance L is large enough to accommodate the stepper motors **131** to **135**. In addition, as shown in FIG. **2** and FIG. **3**, the hand staffs **320**, **420**, **520**, and **620** that are driven by the drive mechanism **13** are also disposed between the patch antenna **19** and the inside surface of the case member **111**.

The stepper motors **131** to **135**, wheel trains **136** and **137**, and hand staffs **320**, **420**, **520**, and **620** are therefore disposed around the patch antenna **19** in the movement **10** according to this embodiment of the invention. In other words, the patch antenna **19** is disposed between the staffs **320** and **620** and between the staffs **420** and **520**.

Note that the hand staffs **320**, **420**, **520**, and **620** are normally metal, but because they are thin pipe-like members they have substantially no affect on reception performance compared with the case **11** even if disposed proximally to the patch antenna **19**. Note, further, that the effect on reception performance can be even further reduced by making the hand staffs **320**, **420**, **520**, and **620** from plastic or other nonconductive material.

Furthermore, the movement **10** in this embodiment of the invention thus has the drive mechanism **13** and patch antenna **19**, the circuit board **12**, and then the storage cell **14** disposed sequentially on different layers from the dial **2** side to the back cover **112** side of the movement **10**. The receiver unit **20** and control unit **16** mounted on the circuit board **12** are disposed on the back cover side (the side facing the back cover **112**) of the circuit board **12**.

A magnetic shield **81** is disposed below the storage cell **14** (on the back cover **112** side), and a charge coil **82** is disposed on the back cover side of the magnetic shield **81**. The storage cell **14** can therefore be charged with power by means of the charge coil **82** by contactless electromagnetic induction from an external charger not shown. As a result, the glass second back cover part **112**B of the back cover **112** is disposed to the part of the back cover **112** overlapping the charge coil **82** in plan view in order to transmit power.

The magnetic shield **81** disposed above the charge coil **82** (on the storage cell **14** side) is provided to reduce eddy current loss of the metal can of the storage cell **14** due to the magnetic field induced in the charge coil **82**.

The GPS wristwatch **1**A also has a bezel **121** disposed on the top side of the case member **111**.

The bezel **121** is ring-shaped and is connected to the case member **111** by a pressure-fit construction. The crystal **122** is disposed to the inside circumference side of the bezel **121**.

A dial ring **123** is disposed on the inside circumference side of the bezel **121**.

The dial ring **123** is ring-shaped with an outside diameter matching the dial **2** and the inside circumference part sloped towards the dial **2**.

Most radio signals received by the patch antenna **19** are incident to the patch antenna **19** through the crystal **122**. As a result, reception by the patch antenna **19** will not be disabled even if the bezel **121** and dial ring **123** are metal. However, because the bezel **121** and dial ring **123** are disposed above the patch antenna **19** and affect reception by the patch antenna **19**, they are made from a nonconductive material in this embodiment of the invention. The bezel **121** can be plastic, but because it is exposed to the outside and subject to scratching, the bezel **121** is made from a hard, scratch-resistant ceramic.

Circuit Configuration of the GPS Wristwatch

FIG. **6** schematically describes the circuit configuration of the GPS wristwatch **1**A.

As shown in FIG. **6**, the GPS wristwatch **1**A includes a patch antenna **19**, filter (SAW) **192**, receiver unit **20**, control display unit **70**, and power supply unit **80**.

The filter (SAW) **192** is a bandpass filter that extracts 1.5 GHz satellite signals. A low noise amplifier (LNA) may be inserted between the patch antenna **19** and filter **192** to improve reception sensitivity.

Note, further, that the filter (SAW) **192** may be incorporated in the receiver unit **20**.

The receiver unit **20** processes the satellite signals extracted by the filter **192**, and includes an RF unit (radio frequency) **21** and baseband unit **22**.

The RF unit **21** includes a PLL circuit **211**, IF filter **212**, a VCO (voltage controlled oscillator) **213**, an A/D converter **214**, a mixer **215**, an LNA (low noise amplifier) **216**, and an IF amplifier **217**.

The satellite signal extracted by the filter **192** is amplified by the LNA **216**, mixed by the mixer **215** with a signal from the VCO **213**, and down-converted to a signal in the intermediate frequency band.

The IF signal output by the mixer **215** passes the IF amplifier **217** and IF filter **212**, and is converted to a digital signal by the A/D converter **214**.

The baseband unit **22** includes a DSP (digital signal processor) **221**, CPU (central processing unit) **222**, and SRAM

(static random access memory) **223**. A TCXO (temperature-compensated crystal oscillator) **23** and flash memory **24** are also connected to the baseband unit **22**.

The digital signal from the A/D converter **214** of the RF unit **21** is input to the baseband unit **22**, which processes the satellite signals based on a control signal and acquires satellite time information and positioning information therefrom.

Note that the clock signal for the PLL circuit **211** is output from the TCXO **23**.

The control display unit **70** includes the control unit **16** (CPU) and a display unit including the drive circuit **130** that drives the hands **32**, **42**, **52**, **62** and the first time display unit **3**, second time display unit **4**, longitude display unit **5**, and latitude display unit **6**.

The control unit **16** includes an RTC (real-time clock) **16**A and storage unit **16**B as hardware components.

The RTC **16**A keeps internal time using a reference signal output from a crystal oscillator **161**. The timekeeping means of the invention is thus rendered by the RTC **16**A.

The storage unit **16**B stores the time data and positioning data output from the receiver unit **20**. Time difference data for the positioning information is also stored in the storage unit **16**B, and the local time at the current location can be calculated from the internal time kept by the RTC **16**A and the time difference data.

By having the receiver unit **20** and control display unit **70** described above, the GPS wristwatch **1**A in this embodiment can automatically adjust the displayed time based on the signal received from the GPS satellite.

The control unit **16** is configured to execute an automatic reception process that operates the receiver unit **20** and executes a reception process when the internal time kept by the RTC **16**A reaches a preset scheduled reception time (such as 3:00 a.m.), and to execute a manual reception process that executes the reception process when triggered by manually operating an operating button **8**, for example. The scheduled reception means of the invention is thus rendered by the control unit **16**.

The power supply unit **80** includes the charge coil **82**, a charging control circuit **83**, the storage cell **14**, a first regulator **84**, a second regulator **85**, and a voltage detection circuit **86**.

The charge coil **82** supplies power to the storage cell **14** through the charging control circuit **83** and thus charges the storage cell **14**.

The storage cell **14** supplies drive power through the first regulator **84** to the control display unit **70**, and supplies drive power through the second regulator **85** to the receiver unit **20**.

The voltage detection circuit **86** monitors the voltage of the storage cell **14** and outputs to the control unit **16**. The control unit **16** can therefore know the storage cell **14** voltage and control the reception process.

The effects of the GPS wristwatch **1**A according to this embodiment of the invention are described next.

Because the patch antenna **19** is separated at least a specified distance from the inside surface of the cylindrical case member **111** in this embodiment of the invention, the effect of a conductive case member **111** can be reduced and a drop in reception performance can be prevented even when the cylindrical case member **111** uses a conductive material. More specifically, because the patch antenna **19** is located in the plane center of the GPS wristwatch **1**A in this embodiment of the invention, specified distance L can be maximized and reception performance can be maximized compared with placing the patch antenna **19** in a different location.

In addition, when the patch antenna **19** is separated at least a specified distance from the inside surface of the case **11**, the hand staffs **320**, **420**, **520**, and **620** and wheel trains **136** and **137** can be disposed in the space between the patch antenna **19** and case **11**, this space can be used efficiently, and a small timepiece can be achieved.

Furthermore, because the patch antenna **19** is located in the plane center of the GPS wristwatch **1**A, the patch antenna **19** can receive radio signals that are incident from above and radio signals that are incident diagonally from the sides without obstruction by the case member **111** even when the top of the case member **111** is substantially at the same elevation as the top of the patch antenna **19**. The metal case member **111** can therefore occupy a larger area in the appearance of the timepiece **1**A while assuring good reception process for the patch antenna **19** and improving the appearance of timepiece **1**A quality.

Furthermore, because the specified distance L is sized to accommodate the stepper motors **131** to **135**, the stepper motors **131** to **135** can be disposed anywhere around the patch antenna **19**, the freedom of the layout of the stepper motors **131** to **135** and the hands **32**, **42**, **52**, **62** driven by the stepper motors **131** to **135** can be improved, and the space around the patch antenna **19** can be used efficiently.

A timepiece can therefore be rendered with the layout of the hands **32**, **42**, **52**, **62** different from that of a common analog timepiece having the hand staff disposed in the plane center of the dial **2**, a plurality of hand staffs **320**, **420**, **520**, and **620** can be disposed around the patch antenna **19** as described in this embodiment, and a timepiece with multiple dials and hands for displaying longitude, latitude, or other information in addition to the time can be achieved.

Furthermore, because the stepper motors **131** to **135** used as the drive source for driving the hands **32**, **42**, **52**, **62** are disposed between the inside surface of the cylindrical case member **111** and the outside surface of the patch antenna **19**, the patch antenna **19** and stepper motors **131** to **135** will not overlap in the thickness direction of the GPS wristwatch **1**A. As a result, the thickness of the GPS wristwatch **1**A according to this embodiment of the invention can be reduced compared with a timepiece in which the patch antenna **19** and stepper motors **131** to **135** overlap in the thickness direction. More particularly, because the patch antenna **19** and stepper motors **131** to **135** are relatively thick compared with other parts in the GPS wristwatch **1**A, the thickness of the GPS wristwatch **1**A can be greatly reduced by disposing these parts so that they do not overlap in plan view.

Furthermore, patch antennas **19** are flat unidirectional antennas with narrow directivity, but because the circuit board **12** to which the patch antenna **19** is disposed functions as a ground plane, radio signals incident from the outside are reflected by the circuit board **12** and can be guided to the patch antenna **19**. In addition to radio signals that are directly incident to the patch antenna **19**, the patch antenna **19** can therefore receive radio signals that are reflected from the circuit board **12** and indirectly incident. The patch antenna **19** can therefore be assured of better reception performance.

In addition, because the patch antenna **19** receives circularly polarized waves, a timepiece having a function for adjusting the time using time information contained in a satellite signal, for example, can reliably receive signals from positioning information satellites anywhere on Earth and can constantly keep accurate time.

Embodiment 2

FIG. **7** is a section view of a GPS wristwatch **1**B according to a second embodiment of the invention. FIG. **8** is an exploded oblique view schematically showing the main parts of the GPS wristwatch **1**B according to this embodiment of the invention. Note that like parts in this embodiment and the

foregoing embodiment are identified by like reference numerals and further description thereof is omitted.

Power is supplied to the storage cell **14** by the charge coil **82** in the foregoing embodiment, and this embodiment differs by using a solar panel **87** to supply power to the storage cell **14**.

In addition, because this embodiment does not use a charge coil **82**, there is no need to use a glass second back cover part **112**B for power transmission, and the entire back cover **112** is metal.

As shown in FIG. **7** and FIG. **8**, the solar panel **87** is disposed between the dial **2** and the date wheel **18**. This solar panel **87** is annular with a rectangular window **87**A that exposes the patch antenna **19** in the middle. The window **87**A is formed to the same shape and size and in the same plane position as the opening **171** in the base plate **17**. As a result, the date window **2**A is disposed to a position overlapping both the opening **171** and the window **87**A in plan view.

The solar panel **87** is a common solar panel composed of four solar cells and has a metal substrate. The solar cells are connected in series and the area of the solar cells is maximized by rendering four through-holes **87**B through which the hand staffs **320**, **420**, **520**, and **620** pass on the lines separating the solar cells from each other. The solar panel **87** produces power from light incident from the crystal **122** side. Power produced by the solar panel **87** passes through the charging control circuit **83** and charges the storage cell **14** in the same way as in the first embodiment. The dial **2** in this embodiment is made from polycarbonate or other transparent plastic material so that it does not interfere with light passing to the solar panel **87**.

When a window **87**A is formed in the solar panel **87**, the light-collecting surface area is reduced and power output drops accordingly. For power generating performance, the area of the window **87**A is therefore preferably as small as possible.

In addition, because the solar panel **87** has a metal substrate, radio waves passing through portions other than the window **87**A are greatly attenuated. Therefore, in order to improve the reception performance of the patch antenna **19**, the surface area of the window **87**A is preferably as large as possible.

The area of the window **87**A may therefore be determined with consideration for the foregoing two conditions, and in this embodiment of the invention is set to the same size as the plane area of the patch antenna **19**.

In addition to the effect of the first embodiment described above, the GPS wristwatch **1**B according to this embodiment of the invention has the following effect.

By using an optically transparent dial **2** and disposing the solar panel **87** on the back cover side of the dial, this embodiment of the invention can charge the storage cell **14** with power generated by the solar panel **87** and use this power to drive the GPS wristwatch **1**B. Therefore, similarly to the first embodiment, there is no need to replace the battery as there is when a primary battery is used, and user convenience can be improved.

In addition, while the first embodiment charges by means of electromagnetic induction and therefore requires disposing a non-metallic second back cover part **112**B to the back cover **112**, the second embodiment uses a solar panel **87** for charging, can therefore use a metal back cover **112**, and thus further improve the appearance of the GPS wristwatch **1**B.

In addition, high frequency signals such as GPS satellite signals are attenuated because the solar panel **87** has a metal substrate, but because a window **87**A is formed in the solar panel **87** in this embodiment of the invention, signals can pass through the window **87**A and be picked up by the patch antenna **19**. The patch antenna **19** can therefore receive radio signals passing through the solar panel **87**, signal attenuation by the solar panel **87** can be prevented, and reception performance can be improved.

In addition, because the date window **2**A in the dial **2** is formed at a position superimposed on the window **87**A of the solar panel **87** in plan view, there is no need to form a separate window in the solar panel **87** to expose the date wheel **18**, the light-collecting surface area can be increased compared to a configuration having an additional opening, and power generating performance can be improved.

Embodiment 3

FIG. **9** is an exploded oblique view showing the main parts of a GPS wristwatch **1**C according to a third embodiment of the invention. Note that like parts in this embodiment and the first embodiment are identified by like reference numerals and further description thereof is omitted.

The patch antenna **19**A in this embodiment of the invention is round in plan view, and thus differs in shape from the rectangular patch antenna **19** described in the first embodiment.

Note, further, that this embodiment has a solar panel **87** but can be configured without a solar panel **87**.

Because the patch antenna **19**A is round in plan view, the window **87**A in the solar panel **87** and the opening **171** in the base plate **17** are also round conforming to the shape of the patch antenna **19**A. The antenna substrate **191**A is also round in plan view.

In addition to the effects of the first and second embodiments described above, the GPS wristwatch **1**C according to this embodiment of the invention has the following effect.

Because the patch antenna **19**A in this embodiment of the invention is round in plan view, space inside the case **11** can be used more effectively when the patch antenna **19**A is housed in a case **11** that is also round in plan view than when the rectangular patch antenna **19** described in the foregoing embodiments.

Note that the resonance frequency of the round patch antenna **19**A can be determined from the following equation (1). The length of one side of the rectangular patch antenna **19** used in the first and second embodiments is the half wavelength of the received signals. Therefore, when the patch antennas **19** and **19**A are made of the same dielectric material, the round patch antenna **19**A and the rectangular patch antenna **19** have substantially the same area.

$$f = 1.84\frac{C}{2\pi a\sqrt{\varepsilon_r}} \quad (1)$$

where f is the resonance frequency, C is the speed of light, a is the radius of the patch antenna, and Er is the dielectric constant of the dielectric material.

Because the patch antenna **19**A is round in plan view in this embodiment of the invention, the specified distance L between the patch antenna **19**A and the inside surface of the case member **111** can be increased compared with the first and second embodiments of the invention. As a result, the stepper motors **131** to **135** can be placed more freely. In addition, when the specified distance L is the same as in the first embodiment, the plane size of the case member **111** can be reduced and the GPS wristwatch **1**C can be made smaller.

Furthermore, because the area of the window **87**A can be reduced compared with the first embodiment if the size of the solar panel **87** is the same as in the first embodiment, the

light-collecting surface area of the solar panel **87** can be increased accordingly, and power output can also be increased.

Embodiment 4

FIG. **10** is a plan view of a GPS wristwatch **1**D according to a fourth embodiment of the invention. FIG. **11** is an oblique view of the circuit board **12**. FIG. **12** is a schematic section view of the GPS wristwatch **1**D. Note that like parts in this embodiment and the first embodiment are identified by like reference numerals and further description thereof is omitted.

The dial **2** in the foregoing embodiments is round in plan view, but in this embodiment of the invention is an ellipse when seen in plan view. The foregoing embodiments use one storage cell **14**, but this embodiment uses two batteries **14**A each having a smaller diameter than the storage cell **14**.

When seen in plan view, the dial **2** is an ellipse with the major axis on the left-right axis and the minor axis on the top-bottom axis as seen in FIG. **10**. As a result, there is more space at the normal 3:00 and 9:00 positions of the dial **2** than at the 12:00 and 6:00 positions. By disposing the first time display unit **3** at the 3:00 position and the second time display unit **4** at 6:00 in this embodiment, the first time display unit **3** can be disposed to a position where there is no overlap with the patch antenna **19** in plan view.

The shape of the dial **2** is an ellipse in plan view, and the circuit board **12** and base plate **17** are therefore also ellipses in plan view.

Because the top-bottom diameter of the movement **10** in this embodiment of the invention is the same as the top-bottom diameter of the movement **10** in the foregoing embodiments, and the left-right diameter of the movement **10** in this embodiment of the invention is greater than the left-right diameter of the movement **10** described in the foregoing embodiments, the plane area of the movement **10** in this embodiment is greater than the plane area of the movement **10** in the foregoing embodiments.

As shown in FIG. **11**, the circuit board **12** has two voids **12**A large enough to insert the batteries **14**A on left and right sides of the patch antenna **19**. The voids **12**A are formed according to the shape and size of the batteries **14**A at positions corresponding to the 3:00 and 9:00 o'clock positions of the dial **2**, and are formed at positions where they are not superimposed on the patch antenna **19** in plan view.

The batteries **14**A in this embodiment of the invention are primary batteries. In order to ensure the same battery capacity as the storage cell **14** used in the foregoing embodiments, these batteries **14**A are parallel connected and batteries **14**A with a smaller size, such as a smaller diameter, than the storage cell **14** are used. The batteries **14**A are disposed at 3:00 and 9:00 on the dial **2** as shown in FIG. **11** and FIG. **12** with a portion of the battery height inserted in the voids **12**A in the circuit board **12**.

Note that the batteries **14**A in this embodiment are primary batteries, but storage cells **14** that are charged by power from a charge coil **82** or solar panel **87** may be used as in the first to third embodiments.

In addition to the effect of the first embodiment described above, the GPS wristwatch **1**D according to this embodiment of the invention has the following effect.

This embodiment of the invention uses batteries **14**A that each have a smaller diameter than the storage cell **14** described in the embodiments described above. As a result, a large increase in the size of the GPS wristwatch **1**D can be prevented even when the patch antenna **19** and batteries **14**A are disposed so that there is no overlap therebetween in plan view as in this embodiment of the invention.

Furthermore, because the patch antenna **19** and batteries **14**A are disposed with no plane overlap therebetween, the thickness of the GPS wristwatch **1**D can be reduced compared with a configuration in which the patch antenna **19** and batteries **14**A overlap in the thickness direction.

In addition, the first time display unit **3** has three first hands **32**, that is, a first second hand **321**, a first hour hand **322**, and a first hour hand **322**, each made of metal, and has more hands than the other display units **4** to **6**. Therefore, if the first time display unit **3** is disposed at a position superimposed on the patch antenna **19** in plan view, the possibility of the first hands **32** overlapping the patch antenna **19** is greater than in the other display units **4** to **6**, and may possibly affect at least the reception performance of the patch antenna **19**.

As a result, this embodiment of the invention uses a dial **2** that is an ellipse when seen in plan view, creating more space at 3:00 and 9:00 than at 12:00 and 6:00, and disposes the first time display unit **3** in the large space at 3:00. As a result, the first time display unit **3** can be located at a position not superimposed on the patch antenna **19** in plan view, and the first hands **32** can be prevented from affecting the reception performance of the patch antenna **19**.

Embodiment 5

FIG. **13** is a plan view of a GPS wristwatch **1**E according to a fifth embodiment of the invention. FIG. **14** is a plan view showing the hand positions during the reception process. Note that like parts in this embodiment and the foregoing embodiments are identified by like reference numerals and further description thereof is omitted.

As in the fourth embodiment, the dial **2** in this embodiment of the invention is an ellipse when seen in plan view with the left-right axis longer than the top-bottom axis.

A first time display unit **3** that is round in plan view is disposed as a first display unit at 3:00 (the crown **9** side) of the dial **2**. A second time display unit **4**A that is similarly round is disposed as a second display unit at 10:00 o'clock on the dial **2**. The second hour hand **422** of the second time display unit **4**A in this embodiment of the invention is a 24-hour hand that turns one revolution in 24 hours, and the chapter ring **41**A is a 24-hour chapter ring.

A round mode display unit **90** is disposed as a third display unit for displaying reserve power or the signal reception level, for example, at 7:00 to 8:00 on the dial **2**.

The mode display unit **90** has a calendar ring **91** for displaying the signal reception level. A graduated scale **911** that is arcuate and increases gradually in width along the direction of curvature is presented on the calendar ring **91**, and the letter "H" denoting high reserve power or a high signal level is displayed at the wide end of the graduated scale **911**.

The hand **92** of this mode display unit **90** is metal like the other hands **32**, **42**, displays reserve power except during signal reception, and displays the reception level during reception.

The display units **3** to **6** are all substantially the same size in the embodiments described above, but the first time display unit **3** is larger than the other display units in this embodiment. The first time display unit **3** occupies approximately half the area of the dial **2** so that the current time displayed on the first time display unit **3** can be read more easily.

The diameters of the other display units **4**A and **90** are approximately half the size of the first time display unit **3**.

The plane center of the first time display unit **3** (the position of the staff **320**) and the plane centers of the second time display unit **4**A and mode display unit **90** (the positions of the staffs **420** and **95**) are offset to the left and right sides on the long axis (left-right direction) of the dial **2**.

The plane centers of the second time display unit **4**A and the mode display unit **90** (the positions of the staffs **420** and **95**) are offset on the short axis (top-bottom direction) of the dial **2**.

The date display unit **7** is disposed at a position surrounded by these three display units **3**, **4**A, and **90**. The date display unit **7** has a round hole formed in the dial **2** and a plastic date wheel **18** that is disposed below the dial **2** and exposed through this hole. The patch antenna **19** is located below the round hole in the date display unit **7**.

The patch antenna **19** is disposed at a position with part thereof superimposed on the display units **3**, **4**A, and **90** in plan view. The patch antenna **19** is also disposed at a position not overlapping the staff **320** of the first hands **32**, the staff **420** of the second hands **42**, or the staff **95** of the hand **92** in plan view.

More specifically, the patch antenna **19** is disposed between the staff **420** and staff **95** in the direction of a line connecting the staff **420** and staff **95** (the short axis of the dial **2**).

The patch antenna **19** is also disposed between the staff **420** and staff **320** in the direction of a line connecting the staff **420** and staff **320**.

The patch antenna **19** is also disposed between the staff **320** and the staff **95** in the direction of a line connecting the staff **320** and staff **95**.

On the long axis of the dial **2**, the patch antenna **19** is thus disposed offset from staff **320** to the side of staffs **95** and **420**.

That the patch antenna **19** is located between the staffs as described above means that part of the patch antenna **19** is disposed on an axis connecting two staffs. In this configuration the patch antenna **19** is preferably disposed between two lines that are perpendicular to a line through the two staffs and pass respectively through the two staffs. For example, that the patch antenna **19** is located between staff **420** and staff **95** means that part of the patch antenna **19** is superimposed on a line connecting staff **420** and staff **95**. The patch antenna **19** is also preferably disposed between two lines that are perpendicular to the line through staff **420** and staff **95** and respectively pass through the staffs **420** and **95**.

A stepper motor **141** that drives the first hour hand **322** and first minute hand **323** of the first time display unit **3**, a stepper motor **142** that drives the first second hand **321**, a stepper motor **143** that drives the date wheel **18**, a stepper motor **144** that drives the second hour hand **422** and second minute hand **421** of the second time display unit **4**A, and a stepper motor **145** that drives the hand **92** of the mode display unit **90** are disposed below the dial **2**.

These stepper motors **141** to **145** are identical to the stepper motors **131** to **135** in the foregoing embodiments, and further description thereof is thus omitted.

As shown in FIG. **13**, these stepper motors **141** to **145** are disposed in one of two plane areas into which the dial **2** is divided by an imaginary line D passing through the center of the patch antenna **19**.

Drive power from stepper motor **144** is transmitted through wheel train **146** to the staff **420** and drives the second minute hand **421** and second hour hand **422**. Drive power from the stepper motor **145** is similarly transferred through wheel train **147** to the staff **95** and drives the hand **92**. These wheel trains **146** and **147** are, like staffs **420** and **95**, disposed between the patch antenna **19** and the inside surface of the case **11**.

The other stepper motors **141** to **143** likewise drive the first hour hand **322**, first minute hand **323**, first second hand **321**, and date wheel **18** through wheel trains not shown, and these wheel trains are also disposed between the patch antenna **19** and the inside surface of the case **11**.

The imaginary line D in this embodiment of the invention is set along the 12:00-6:00 axis of the dial **2** (in line with the wristband). The center of the patch antenna **19** is also offset from the plane center of the dial **2** to the 9:00 side (the opposite side as the side where the crown **9** is located).

As a result, when the dial **2** is divided into two parts in plan view by imaginary line D, the area on the 3:00 o'clock side of the imaginary line D is larger than the area on the 9:00 o'clock side. The stepper motors **141** to **145** are located in this part with the larger area.

The stepper motors **141** to **145** are not disposed in the area on the 9:00 o'clock side of the imaginary line D. As shown in FIG. **4** in the first embodiment, the stepper motors **131** to **135** are disposed around the patch antenna **19**, and the patch antenna **19** is nearly completely surrounded by the stepper motors **131** to **135**. In this embodiment as shown in FIG. **13**, however, the stepper motors **141** to **145** are not disposed in nearly half of the area around the patch antenna **19**, and the stepper motors **141** to **145** do not completely surround the patch antenna **19**.

As a result, radio waves from the 9:00 o'clock side of the dial **2** in this GPS wristwatch **1**E can be received by the patch antenna **19** without being affected by the stepper motors **141** to **145**.

The same movements and batteries described in the foregoing embodiments can also be used in this embodiment. The battery may be a primary battery, or a storage cell **14** that is charged by a charging coil or solar panel may be used as described in the first to third embodiments.

The GPS wristwatch **1**E according to the fifth embodiment of the invention has a dual time display mechanism that can display the time in two regions in different time zones by means of the first time display unit **3** and second time display unit **4**A.

For example, the first time display unit **3** can be used as a standard clock that displays the current time while using the second time display unit **4**A to display the time in another preset time zone. In FIG. **13** and FIG. **14** the first time display unit **3** displays Japan Standard Time (JST), which is a time zone where the time is Universal Coordinated Time (UTC)+9 hours, and the second time display unit **4**A displays the time in a time zone (such as Thailand) where the time is UTC+7 hours. In the example shown in FIG. **13**, the first time display unit **3** with a 12-hour calendar ring shows a time of approximately 10:8:37 p.m., and the second time display unit **4**A with a 24-hour calendar ring shows a time of 20:08 (08:08) p.m.

The reception operation in this embodiment of the invention is described next.

Similarly to the foregoing embodiments, the GPS wristwatch **1**E has a scheduled reception mechanism (automatic reception mechanism) that executes the reception process at a predetermined time, and a manual reception mechanism that executes the reception process when the user presses a button.

More specifically, the control unit **16** of the GPS wristwatch **1**E has a scheduled reception mechanism that starts reception when the internal time reaches a specified scheduled time. The internal time is kept by the RTC **16**A shown in FIG. **6**.

The scheduled reception mechanism is controlled to start the scheduled reception at a time when the hands **32** and **42** that display the time are not over the area of the patch antenna **19** in plan view.

More specifically, the control unit **16** checks the time difference between the first hands **32** of the first time display unit **3** and the second hands **42** of the second time display unit **4**A, and starts scheduled reception at a time that is preset according to the time difference.

For example, when the first hour hand **322** of the first time display unit **3** is in the area of 8:00-10:00, and when the first hour hand **322** is in the area of 40-50 minutes, one of the hands **322** and **323** may be over the patch antenna **19** when seen in plan view. The scheduled reception time is therefore a time when the first hour hand **322** is outside the 8:00-10:00 range, and when the first hour hand **322** is outside the area of 40-50 minutes. More specifically, the scheduled reception time is set to a time when the first hour hand **322** is in the range from 0 (12:00) to 8:00 (20:00), or is in the range from 10:00 (22:00) to 12:00 (24:00), and the first minute hand **323** is in the range from 0-40 minutes or 50-60 minutes.

One of the hands **421** and **422** may also overlap the patch antenna **19** in plan view when the second hour hand **422** of the second time display unit **4**A is in the range from 6:00-12:00, and when the second minute hand **421** is in the range from 15-30 minutes. The scheduled reception time is therefore a time when the second hour hand **422** is outside the range from 6:00-12:00, and the second minute hand **421** is outside the range from 15-30 minutes. More specifically, the scheduled reception time is set to a time when the second hour hand **422** points to the range from 0:00-6:00 or from 12:00-24:00, and the second minute hand **421** points to the range from 0-15 minutes or the range from 30-60 minutes.

The control unit **16** sets the scheduled reception time to a range in which the first hands **32** and the second hands **42** satisfy the foregoing conditions. Because the times when these conditions are satisfied differs according to the difference between the times indicated by the first time display unit **3** and the second time display unit **4**A, the control unit **16** starts scheduled reception at a time that is set according to the time difference. In the example shown in FIG. **14** the time indicated by the second time display unit **4**A is −2 hours from the time indicated by the first time display unit **3**. As a result, if reception is set to start when the first time display unit **3** indicates 3:00 a.m. and the second time display unit **4** indicates 1:00 a.m., for example, the reception operation can be executed when the hands **32** and **42** do not overlap the patch antenna **19** in plan view.

During reception the first second hand **321** moves to the reception display position (a position at 12:00 on the chapter ring **31**) and stops. A marker "R" denotes this reception display position on the dial **2**. As a result, the first second hand **321** will not move to a position overlapping the patch antenna **19** in plan view while reception is in progress.

Hand **92** will also not move to a position overlapping the patch antenna **19** in plan view during reception because it displays the reception level in the area where the graduated scale **911** and "H" are displayed. This movement of the first second hand **321** and hand **92** is controlled by the drive circuit **130**, which is a motor drive control means.

Because the scheduled reception time is executed when these conditions are met, signals can be received when the hands **32**, **42**, and **92** are not located over the patch antenna **19**.

In the manual reception process, however, the reception process executes when the user presses a button. The hand **92** is also moved by the drive circuit **130** and displays the reception level in this situation, and is therefore not located above the patch antenna **19**. The first second hand **321** is also moved to the receiving display position by the drive circuit **130** and stops.

The first hour hand **322**, first minute hand **323**, second hour hand **422**, and second minute hand **421**, however, are not moved in conjunction with the reception process. As a result, the user preferably starts reception manually at a time when these hands **322**, **323**, **421**, **422** are not located over the patch antenna **19**.

When signals are received from the GPS satellite S and positioning data and time data are received, the control unit **16** adjusts the time displayed by the first time display unit **3** based on this information and also adjusts the time displayed by the second time display unit **4**A accordingly.

In addition to the effects of the embodiments described above, this embodiment of the invention also has the following effect.

In the area around the patch antenna **19**, the stepper motors **141** to **145** are disposed on only one side of an imaginary line D. As a result, when the patch antenna **19** receives satellite signals from the area on the other side of the line, signals can be received without being affected by the stepper motors **141** to **145**, and reception sensitivity can be improved.

Furthermore, because the patch antenna **19** is located offset to the 9:00 side from the plane center of the dial **2** in this embodiment, the area of the region on the 3:00 side of the imaginary line D can be increased.

As a result, the area in which the stepper motors **141** to **145** are disposed can be increased, and five motors can be used as described in this embodiment. A timepiece with multiple subdials (timepiece with multiple staffs) having a plurality of staffs can thus be easily rendered.

Furthermore, because the size of the first time display unit **3** is larger than the other display units **4**A and **90**, the time at the current location displayed by the first time display unit **3** can be easily read and usability can be improved.

The patch antenna **19** is located between the hand staffs **320**, **420**, **95**. As a result, the patch antenna **19** can be disposed at least a specified distance from the inside surface of the case **11**. More specifically, the patch antenna **19** can be separated from the inside surface of the case **11** at least an amount that is the minimum distance between the staffs **320**, **420**, **95** and the inside surface of the case **11**.

As a result, the effect of a metal case **11** on reception of satellite signals by the patch antenna **19** can be reduced.

Furthermore, because the staffs **320**, **420**, **95** and wheel trains **146**, **147** can be located in the space between the patch antenna **19** and case **11**, this space can be used effectively and the timepiece can be made thinner than a configuration in which the antenna **19** and wheel trains **146**, **147** overlap each other in the thickness direction of the timepiece.

In addition, the patch antenna **19** is superimposed in plan view on the three display units **3**, **4**A, **90**. As a result, the area in which these display units **3**, **4**A, **90** and the patch antenna **19** overlap in plan view can be reduced compared with a configuration in which the patch antenna **19** is disposed straddling only two display units.

The area in which the hands **32**, **42**, **92** can be disposed without overlapping the patch antenna **19** in plan view is therefore larger, and the scheduled reception process can be easily executed at a time when the hands **32**, **42** that display the time are not superimposed on the patch antenna **19**.

The mode display unit **90** displays the remaining battery capacity during normal operation of the movement, and displays the reception level during signal reception. As a result, the user can easily know the remaining battery capacity and the reception level from the mode display unit **90**.

Embodiment 6

FIG. **15** is a plan view of a GPS wristwatch **1**F according to a sixth embodiment of the invention. Note that like parts in this sixth embodiment and the foregoing embodiments are identified by like reference numerals and further description thereof is omitted.

This GPS wristwatch **1**F has a first time display unit **3** and a second time display unit **4**A that is smaller than the first time display unit **3** similarly to the GPS wristwatch **1**E according

to the fifth embodiment of the invention, but differs therefrom by not having a mode display unit **90**. As a result, the first time display unit **3** and second time display unit **4**A are disposed on the left and right sides of the dial **2** as shown in FIG. **15**, and the staffs **320** and **420** of the hands **32** and **42** are disposed on a line connecting 3:00 and 9:00 on the dial **2**.

A battery **14**A is disposed on the back side of the dial **2** at a plane position near 12:00 on the dial **2**.

Further similarly to the GPS wristwatch **1**E, stepping motors **141**-**144** drive the hands and date wheel.

In this GPS wristwatch **1**F the patch antenna **19** is disposed in an area superimposed on the dial **2** in plan view and between the staff **420** and staff **320** in the direction of a line connecting the staff **420** and staff **320**.

More specifically, the patch antenna **19** is disposed between two imaginary lines that pass through the staffs **320** and **420** and are perpendicular to an imaginary line connecting staff **320** and staff **420**.

In addition, part of the patch antenna **19** is disposed at a position superimposed in plan view on the display units **3** and **4**A. The area of the part where the patch antenna **19** and display units **3**, **4**A overlap each other in plan view decreases as the position where the patch antenna **19** is located moves perpendicularly away from a line passing through the staffs **320** and **420**.

However, the patch antenna **19** also moves closer to the inside surface of the case **11** with movement in this direction.

Therefore, the location of the patch antenna **19** may be determined with consideration for the distance to the inside surface of the case **11** and the area of plane overlap with the display units **3** and **4**A. More specifically, the distance between the patch antenna **19** and the inside surface of the case **11** is preferably as large as possible to prevent a drop in reception sensitivity, and this area of overlap is preferably as small as possible to more easily prevent the hands **32** and **42** from overlapping the patch antenna **19** during scheduled reception operations. As also shown in the figure, increasing the distance between the patch antenna **19** and case **11** also increases this area of overlap. The location of the patch antenna **19** is therefore preferably determined with consideration for these factors.

A display window is also rendered in the part of the dial **2** where the patch antenna **19** is located. A large and a small display ring are exposed in this display window.

The inside ring **18**A is a date wheel that displays the current date in the window.

The outside ring **18**B is a ring that displays the names of cities representing the time zone of the time displayed by the second time display unit **4**A. In FIG. **15** "TYO" denoting Tokyo is displayed to indicate the time zone of the time displayed by the second time display unit **4**A.

Note that in this embodiment of the invention the two rings **18**A and **18**B are driven rotationally by a stepper motor **143**. More specifically, when the rotor of the stepper motor **143** moves in a specific first direction, the inside ring **18**A rotates in the direction advancing the displayed date.

When the rotor of the stepper motor **143** moves in a second direction opposite the first direction, the outside ring **18**B turns in a specified single direction.

More specifically, by changing the direction of stepper motor **143** rotation, the inside and outside rings **18**A and **18**B can rotate individually.

Note that a configuration that has another stepper motor and drives the rings **18**A and **18**B with different motors is also conceivable.

When the plane area of the dial **2** is divided into two sections by an imaginary line D**1** that passes through the plane center of the patch antenna **19** and through the top left corner and bottom right corner of the patch antenna **19** as seen in FIG. **15**, the stepper motors **141**-**144** are also disposed in this embodiment of the invention in the part with the larger area.

As in the GPS wristwatch **1**E described above, the scheduled reception process is executed in this embodiment at a time when the hands **32** and **42** of the display units **3** and **4**A do not overlap the patch antenna **19**. The first second hand **321** moves to the 12:00 position and stops at this time.

When reception is started manually, the first second hand **321** moves to the 12:00 position and stops during reception.

This embodiment of the invention has the same operating effect as the foregoing embodiments. More particularly, this embodiment has the same operating effect as the GPS wristwatch **1**E according to the fifth embodiment of the invention.

Other Embodiments

The invention is not limited to the embodiments described above, and variations and improvements that can achieve the object of the invention are included in the scope of this invention.

GPS wristwatches **1**A to **1**F are used as an example of a timepiece in the embodiments described above, but the invention can also be applied to pocket watches and other types of timepieces.

In the foregoing first to fourth embodiments the patch antenna **19** is located in the plane center of the dial **2**, but the location of the patch antenna **19** can be offset as described in the fifth and sixth embodiments and is not limited to the plane center insofar as the distance L between the outside surface of the patch antenna **19** and the inside surface of the case member **111** is at least a specified size.

An example of such a patch antenna **19** location is described below with reference to FIG. **16** and FIG. **17**.

FIG. **16** is a plan view of a GPS wristwatch **1**G as an example of a variation of the GPS wristwatch **1**A according to the first embodiment of the invention, and FIG. **17** shows the back of the movement **10** in this variation. Note that like parts in this embodiment and the first embodiment are identified by like reference numerals and further description thereof is omitted.

This GPS wristwatch **1**G has a first time display unit **3** at 12:00, a second time display unit **4** at 6:00, a current location display unit **500** near 7:00-8:00, and a date display unit **7** near 4:00-5:00. The current location display unit **500** and date display unit **7** are digital displays rendered by LCD panels, and the LCD panels are exposed and display through windows **2**B and **2**C formed in the dial **2**. The current location display unit **500** in this example displays "TYO" denoting Tokyo.

Because only the first and second time display units **3** and **4** are analog displays, two stepper motors **131** and **132** are disposed between the outside surface of the patch antenna **19** and the inside surface of the case member **111** as shown in FIG. **17**. The hands **32** and **42** on the staffs **320** and **420** that pass through the center of the first and second time display units **3** and **4** are driven by stepper motors **131** and **132**.

As shown in FIG. **17**, the first time display unit **3** is larger than in the first embodiment so that the user can easily read the current time. Because the position of the staff **320** inserted to the first time display unit **3** is near the plane center of the GPS wristwatch **1**G, the staff **320** and the patch antenna **19** could overlap in plan view, and the patch antenna **19** therefore cannot be disposed in the plane center as described in the embodiments described above. As a result, the patch antenna **19** is disposed offset from the plane center toward 6:00. In this configuration the distance L is set so that the outside surface

of the patch antenna **19** and the inside surface of the case member **111** are separated by at least a specified distance.

The circuit board **12** also functions as a ground plate in the embodiments described above, but a separate ground plate that functions only as a ground plate may be used.

In the foregoing embodiments distance L is set so that stepper motors **131** to **135** can be incorporated, but may be set to a distance that will not accommodate stepper motors **131** to **135**. In this configuration the stepper motors **131** to **135** may be disposed to a location with a dimension that is greater than distance L between the outside surface of the patch antenna **19** and the inside surface of the case member **111**.

In the first to third embodiments the date window **2**A is located offset toward 4:00-5:00 from the center of the dial **2**, but the invention is not so limited and the date window **2**A may be rendered at a position moved to the outside from the opening **171**. However, when the solar panel **87** is located above the date wheel **18**, an opening must be formed in the solar panel **87** so that the date can be read from the outside. Therefore, when a solar panel **87** is used the date window **2**A is preferably formed at any position within the range overlapping the opening **171** in plan view.

The patch antenna **19** is rectangular in plan view in the fourth to sixth embodiments, but may be round as in the third embodiment.

In the fourth embodiment voids **12**A are formed in the circuit board **12** according to the shape of the batteries **14**A, but the size of the circuit board **12** may be reduced and the batteries **14**A disposed to a position not superimposed on the patch antenna **19** in plan view.

Furthermore, the fourth embodiment has a second time display unit **4** with two hands disposed at 6:00 on the dial **2** of a common timepiece, but the second time display unit **4** may be disposed at 9:00 on the dial **2** of a common timepiece with the longitude display unit **5** disposed at 6:00. Because the second time display unit **4** with two hands can be disposed to a position where there is no plane overlap with the patch antenna **19** in this configuration, the second hands **42** can be more effectively prevented from interfering with the reception performance of the patch antenna **19**.

The fourth to sixth embodiments shown in FIG. **10** to FIG. **15** are configured so that the direction aligned with the wristband of the timepiece (the direction through 12:00 and 6:00 on the chapter ring **31** of the timepiece) is the minor axis of the dial **2**, but a configuration in which the direction of the timepiece band is aligned with the major axis of the dial **2** is also conceivable. In this configuration, because the dial **2** is an ellipse, the first time display unit **3** in the fifth embodiment may be disposed on the 12:00 side of the dial **2**, and the second time display unit **4**A and the mode display unit **90** may be disposed at the 6:00 side of the dial **2**.

The plane shape of the dial **2** in the fourth to sixth embodiments is also not limited to an ellipse, and may be a rectangle, a shape combining a rectangle and a semicircle, a shape combining a rectangle and a half ellipse, or various other shapes. More specifically, the shape of the dial **2** can be determined according to the design of the timepiece.

The hand staffs in the foregoing embodiments are located between the patch antenna **19**, **19**A and the case **11**, but a through-hole may be formed in the patch antenna and part of the hand staffs may be disposed passing through this through-hole. For example, if the patch antenna is disposed in the center of the timepiece, a 3-hand center display may be rendered by forming a through-hole through which a staff passes in the center of the patch antenna, and disposing a first time display unit with an hour hand, minute hand, and second hand attached to this staff to display the current time.

With this configuration the staff and hands can be located in the plane center of the dial even when the patch antenna is also located in the plane center of the dial. In addition, because the other staffs can be located between the antenna and case, hands for displaying the time in a different time zone, reserve power, or other information can be disposed around the antenna. The layout of the hands used in a GPS wristwatch can therefore be varied in many ways, and GPS wristwatches with fashionable designs can be achieved.

Furthermore, while a through-hole will be formed in the center of the patch antenna with this configuration, the effect of a center through-hole on antenna performance can be reduced while maintaining reception performance even though a through-hole is formed in the center because impedance is low in the center, and a layout similar to a common analog timepiece is thus possible.

The foregoing embodiments are described with reference to a GPS satellite as an example of a positioning information satellite, but the positioning information satellite of the invention is not limited to GPS satellites and the invention can be used with Global Navigation Satellite Systems (GNSS) such as Galileo (EU), GLONASS (Russia), and Beidou (China), and other positioning information satellites that transmit satellite signals containing time information, including the SBAS and other geostationary or quasi-zenith satellites.

The invention is also not limited to receiving RF satellite signals from such positioning information satellites, and may be used as a short-range wireless receiver for circularly polarized wireless tags operating in the 900 MHz frequency band, for example.

Yet further, the invention is not limited to receiving circularly polarized waves, and can be used to receive linearly polarized waves.

Furthermore, when an inverted-F antenna is used as the patch antenna, the invention can also be used in short-range wireless communication devices such as wireless LAN and Bluetooth® receivers. Furthermore, the foregoing embodiments are described primarily with reference to the reception function because they are used as GPS receivers, but the device having an internal antenna according to the invention is not so limited and the invention can obviously also be used in a transmission and reception function.

Although the present invention has been described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims, unless they depart therefrom.

What is claimed is:

1. A timepiece with an internal antenna, comprising:

a case that is made from a conductive material;

a movement that is housed in the case and has a plurality of motors that drive plural staffs disposed at a plurality of locations;

a dial that is made from a nonconductive material, the dial being transparent;

a patch antenna that is disposed inside the case on the back side of the dial, receives radio signals transmitted from an external source, and includes a dielectric and an electrode formed on the dielectric; and

a solar panel that receives light and generates power is disposed on the back side of the dial;

wherein an opening is formed in the solar panel at a position overlapping the patch antenna in plan view;

wherein the patch antenna is disposed separated at least a specific distance from the inside surface of the case, and

wherein the plural staffs are disposed between the case and the patch antenna.

2. The timepiece with an internal antenna described in claim **1**, wherein:

at least two display units including a first display unit and a second display unit are formed as plane circles with a staff in the plane center thereof on the surface of the dial;

the diameter of the first display unit is greater than the diameter of the second display unit; and

the patch antenna is disposed to a position superimposed in plan view on a line connecting the staff of the first display unit and the staff of the second display unit.

3. The timepiece with an internal antenna described in claim **2**, wherein:

the dial is a shape with different vertical and horizontal dimensions on the dial surface;

a third display unit formed as a plane circle with a staff in the plane center thereof is formed on the dial surface in addition to the first display unit and second display unit;

the diameter of the third display unit is less than the diameter of the first display unit; and

the patch antenna is located between the staff of the second display unit and the staff of the third display unit in the shorter of the vertical and horizontal directions of the dial, and on the longer of the vertical and horizontal directions of the dial is offset from the staff of the first display unit toward the staff of the second and third display units.

4. The timepiece with an internal antenna described in claim **1**, further comprising:

a timekeeping means that keeps time internally;

a scheduled reception means that starts reception using the patch antenna when the internal time reaches a specific time; and

a motor drive control means that controls driving the motor;

wherein the plural staffs include

a staff to which is attached a hand that displays time based on the internal time and includes in its path of movement a position where the hand overlaps the patch antenna in plan view, and

a staff to which is attached a hand that displays information other than time and includes in its path of movement a position where the hand overlaps the patch antenna in plan view;

the scheduled reception means starts scheduled reception at a time when a hand that displays the time does not overlap the patch antenna in plan view; and

the motor drive control means moves the hand that displays information other than time to a position not overlapping the patch antenna in plan view while scheduled reception by the scheduled reception means is in progress.

5. The timepiece with an internal antenna described in claim **1**, wherein:

the specific dimension is an amount that enables disposing the motors therein.

6. The timepiece with an internal antenna described in claim **1**, further comprising:

a date wheel that is made from a nonconductive material and is disposed on the back side of the solar panel;

wherein a date window for exposing the date display of the date wheel is formed in the dial; and

the date window is formed at a position overlapping the opening in the solar panel in plan view.

7. The timepiece with an internal antenna described in claim **1**, further comprising:

a plurality of batteries that supply power to the motors and are disposed to a position in the case not overlapping the patch antenna in plan view.

8. The timepiece with an internal antenna described in claim **1**, wherein:

the patch antenna is rendered on a circuit board that functions as a ground plate.

9. The timepiece with an internal antenna described in claim **1**, wherein:

the patch antenna receives circularly polarized radio waves transmitted from a positioning information satellite.

10. A timepiece, comprising:

a case that is made at least in part from a conductive material;

a dial that is made from a nonconductive material;

a solar panel that has an opening and is disposed at a side opposite of a display side of the dial, the solar panel receiving light incident from the display side of the dial;

a patch antenna that is disposed (i) at a side opposite of a light receiving side of the solar panel, (ii) at a position separated from the case, and (iii) at a position overlapping the opening in plan view; and

a movement that is housed in the case.

11. The timepiece described in claim **10**, wherein:

the patch antenna includes a dielectric and an electrode formed on the dielectric; and

the movement has a plurality of motors that drive plural staffs at a plurality of locations.

12. The timepiece described in claim **10**, further comprising:

a date wheel made from a nonconductive material that is disposed between the solar panel and the patch antenna in lateral view, and is disposed at a position overlapping, at least in part, the patch antenna in plan view;

wherein the dial has a date window for exposing at least part of the date wheel; and

wherein the date window is formed at a position overlapping the opening in plan view.

13. The timepiece described in claim **10**, wherein:

a size of the opening is set to be the same as a plane area of the patch antenna.

14. The timepiece described in claim **10**, wherein:

the patch antenna is an inverted-F antenna.

15. The timepiece described in claim **10**, wherein:

the patch antenna is a chip antenna rendering an inverted-F antenna on a ceramic dielectric package.

16. The timepiece described in claim **10**, further comprising:

a receiver unit that processes signals received by the patch antenna; and

a storage cell that is charged with power generated by the solar panel;

wherein the receiver unit is disposed where it does not overlap the storage cell in plan view.

17. The timepiece described in claim **10**, wherein:

the solar panel includes four solar cells.

18. The timepiece described in claim **10**, further comprising:

a receiver unit that processes signals received by the patch antenna; and

an operating button that is manually operated by a user;

wherein the receiver unit processes signals when the operating button is operated.

19. The timepiece described in claim 10, further comprising:

a receiver unit that processes signals received by the patch antenna; and

a control unit that keeps an internal time;

wherein the receiver unit processes signals when the internal time kept by the control unit reaches a preset scheduled reception time.

20. The timepiece described in claim 10, further comprising:

a receiver unit that processes signals received by the patch antenna and outputs positioning information;

a control unit that keeps an internal time; and

a storage unit that stores time difference data;

wherein the control unit calculates a local time based on the positioning information, the internal time, and the time difference data.

21. The timepiece described in claim 10, wherein:

the timepiece is a wristwatch.

22. The timepiece with an internal antenna described in claim 10, wherein:

at least two display units including a first display unit and a second display unit are formed as plane circles with a staff in the plane center thereof on the surface of the dial;

the diameter of the first display unit is greater than the diameter of the second display unit; and

the patch antenna is disposed to a position superimposed in plan view on a line connecting the staff of the first display unit and the staff of the second display unit.

23. The timepiece with an internal antenna described in claim 22, wherein:

the dial is a shape with different vertical and horizontal dimensions on the dial surface;

a third display unit formed as a plane circle with a staff in the plane center thereof is formed on the dial surface in addition to the first display unit and second display unit;

the diameter of the third display unit is less than the diameter of the first display unit; and

the patch antenna is located between the staff of the second display unit and the staff of the third display unit in the shorter of the vertical and horizontal directions of the dial, and on the longer of the vertical and horizontal directions of the dial is offset from the staff of the first display unit toward the staff of the second and third display units.

24. The timepiece with an internal antenna described in claim 10, further comprising:

a timekeeping means that keeps time internally;

a scheduled reception means that starts reception using the patch antenna when the internal time reaches a specific time; and

a motor drive control means that controls driving the motor;

wherein the plural staffs include

a staff to which is attached a hand that displays time based on the internal time and includes in its path of movement a position where the hand overlaps the patch antenna in plan view, and

a staff to which is attached a hand that displays information other than time and includes in its path of movement a position where the hand overlaps the patch antenna in plan view;

the scheduled reception means starts scheduled reception at a time when a hand that displays the time does not overlap the patch antenna in plan view; and

the motor drive control means moves the hand that displays information other than time to a position not overlapping the patch antenna in plan view while scheduled reception by the scheduled reception means is in progress.

25. The timepiece with an internal antenna described in claim 10, wherein:

the specific dimension is an amount that enables disposing the motors therein.

26. The timepiece with an internal antenna described in claim 10, further comprising:

a date wheel that is made from a nonconductive material and is disposed on the back side of the solar panel;

wherein a date window for exposing the date display of the date wheel is formed in the dial; and

the date window is formed at a position overlapping the opening in the solar panel in plan view.

27. The timepiece with an internal antenna described in claim 10, further comprising:

a plurality of batteries that supply power to the motors and are disposed to a position in the case not overlapping the patch antenna in plan view.

28. The timepiece with an internal antenna described in claim 10, wherein:

the patch antenna is rendered on a circuit board that functions as a ground plate.

29. The timepiece with an internal antenna described in claim 10, wherein:

the patch antenna receives circularly polarized radio waves transmitted from a positioning information satellite.

* * * * *