

The Wayback Machine - <https://web.archive.org/web/20070127071930/http://tools.ietf.org:80/html/rfc768>

RFC 768

J. Postel
ISI
28 August 1980


User Datagram Protocol

Introduction

This User Datagram Protocol (UDP) is defined to make available a datagram mode of packet-switched computer communication in the environment of an interconnected set of computer networks. This protocol assumes that the Internet Protocol (IP) [1] is used as the underlying protocol.

This protocol provides a procedure for application programs to send messages to other programs with a minimum of protocol mechanism. The protocol is transaction oriented, and delivery and duplicate protection are not guaranteed. Applications requiring ordered reliable delivery of streams of data should use the Transmission Control Protocol (TCP) [2].

Format

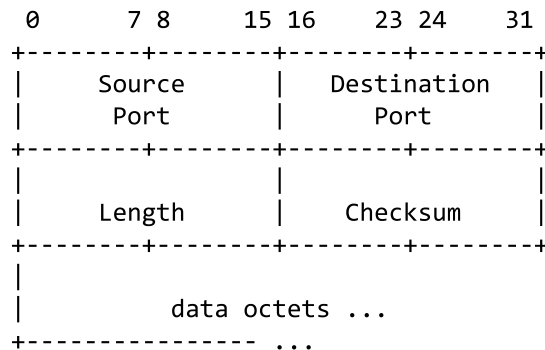

User Datagram Header Format

Fields

Source Port is an optional field, when meaningful, it indicates the port of the sending process, and may be assumed to be the port to which a reply should be addressed in the absence of any other information. If not used, a value of zero is inserted.

Postel

[page 1]

User Datagram Protocol
Fields28 Aug 1980
RFC 768

Destination Port has a meaning within the context of a particular internet destination address.

Length is the length in octets of this user datagram including this header and the data. (This means the minimum value of the length is eight.)

Checksum is the 16-bit one's complement of the one's complement sum of a pseudo header of information from the IP header, the UDP header, and the data, padded with zero octets at the end (if necessary) to make a multiple of two octets.

The pseudo header conceptually prefixed to the UDP header contains the source address, the destination address, the protocol, and the UDP length. This information gives protection against misrouted datagrams. This checksum procedure is the same as is used in TCP.

0	7	8	15	16	23	24	31
source address							
destination address							
zero		protocol		UDP length			

If the computed checksum is zero, it is transmitted as all ones (the equivalent in one's complement arithmetic). An all zero transmitted checksum value means that the transmitter generated no checksum (for debugging or for higher level protocols that don't care).

User Interface

A user interface should allow

the creation of new receive ports,

receive operations on the receive ports that return the data octets and an indication of source port and source address,

and an operation that allows a datagram to be sent, specifying the data, source and destination ports and addresses to be sent.

[page 2]

Postel

28 Aug 1980

RFC 768

User Datagram Protocol
IP InterfaceIP Interface

The UDP module must be able to determine the source and destination internet addresses and the protocol field from the internet header. One possible UDP/IP interface would return the whole internet datagram including all of the internet header in response to a receive operation. Such an interface would also allow the UDP to pass a full internet datagram complete with header to the IP to send. The IP would verify certain fields for consistency and compute the internet header checksum.

Protocol Application

The major uses of this protocol is the Internet Name Server [3], and the Trivial File Transfer [4].

Protocol Number

This is protocol 17 (21 octal) when used in the Internet Protocol. Other protocol numbers are listed in [5].

References

- [1] Postel, J., "Internet Protocol," RFC 760, USC/Information Sciences Institute, January 1980.
- [2] Postel, J., "Transmission Control Protocol," RFC 761, USC/Information Sciences Institute, January 1980.
- [3] Postel, J., "Internet Name Server," USC/Information Sciences Institute, IEN 116, August 1979.
- [4] Sollins, K., "The TFTP Protocol," Massachusetts Institute of Technology, IEN 133, January 1980.
- [5] Postel, J., "Assigned Numbers," USC/Information Sciences Institute, RFC 762, January 1980.

Postel

[page 3]

← → ↺ 🏠 🔍 web.archive.org/web/20070127071930/http://tools.ietf.org/html/rfc768 ☆ 📁 J ⋮

INTERNET ARCHIVE
Wayback Machine

DEC 27 2006 JAN 27 2007 MAR 2008

474 captures
27 Jan 2007 - 14 Apr 2024

🔍 ⓘ ⌂

🌐 📄

About this capture

[\[RFCs\]](#) [\[I-Ds\]](#) [\[Plain Text\]](#)

STANDARD

RFC 768 J. Postel
ISI
28 August 1980

User Datagram Protocol

Introduction

This User Datagram Protocol (UDP) is defined to make available a datagram mode of packet-switched computer communication in the environment of an interconnected set of computer networks. This protocol assumes that the Internet Protocol (IP) [1] is used as the underlying protocol.

This protocol provides a procedure for application programs to send messages to other programs with a minimum of protocol mechanism. The protocol is transaction oriented, and delivery and duplicate protection are not guaranteed. Applications requiring ordered reliable delivery of streams of data should use the Transmission Control Protocol (TCP) [2].

Format

0	7	8	15	16	23	24	31
Source Port				Destination Port			