



US005952806A

United States Patent [19] Muramatsu

[11] Patent Number: **5,952,806**
[45] Date of Patent: **Sep. 14, 1999**

[54] **INNER FORCE SENSE CONTROLLER FOR PROVIDING VARIABLE FORCE TO MULTIDIRECTIONAL MOVING OBJECT, METHOD OF CONTROLLING INNER FORCE SENSE AND INFORMATION STORAGE MEDIUM USED THEREIN**

[75] Inventor: **Shigeru Muramatsu**, Shizuoka, Japan

[73] Assignee: **Yamaha Corporation**, Japan

[21] Appl. No.: **08/953,004**

[22] Filed: **Oct. 16, 1997**

[30] **Foreign Application Priority Data**

Oct. 18, 1996 [JP] Japan 8-276638
Jun. 6, 1997 [JP] Japan 9-149749

[51] **Int. Cl.⁶** **G05B 19/24**; G10F 1/02;
G06F 15/00

[52] **U.S. Cl.** **318/568.12**; 318/568.1;
318/568.11; 318/632; 318/640

[58] **Field of Search** 318/571, 603,
318/602, 601, 687, 135, 114, 128, 560-696;
388/847, 903

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,425,073 1/1984 Mattsson 414/730

4,656,400	4/1987	Pailthorp et al.	318/135
5,294,757	3/1994	Skalski et al.	187/393
5,389,865	2/1995	Jacobus et al.	318/567.11
5,459,382	10/1995	Jacobus et al.	318/568.11
5,629,594	5/1997	Jacobus et al.	318/568.11
5,767,839	6/1998	Rosenberg 345/161	
5,784,542	7/1998	Ohm et al. 395/95	
5,796,927	8/1998	Hegg 395/95	
5,831,408	11/1998	Jacobus et al.	318/568.11


Primary Examiner—Paul Ip

Attorney, Agent, or Firm—Ostrolenk, Faber, Gerb & Soffen, LLP

[57] **ABSTRACT**

An inner force sense controller includes an actuator for exerting a reaction force on a moving object such as a manipulator, a sensor for producing a detecting signal indicative of current position of the moving object and a controlling unit connected to the actuator and the sensor; the controlling unit calculates a current velocity so as to determine the direction of motion, and selects one of the data tables assigned to the direction of the motion for reading out a target reaction force; and the operator feels the inner force sense to be different depending upon the direction of the motion.

21 Claims, 20 Drawing Sheets

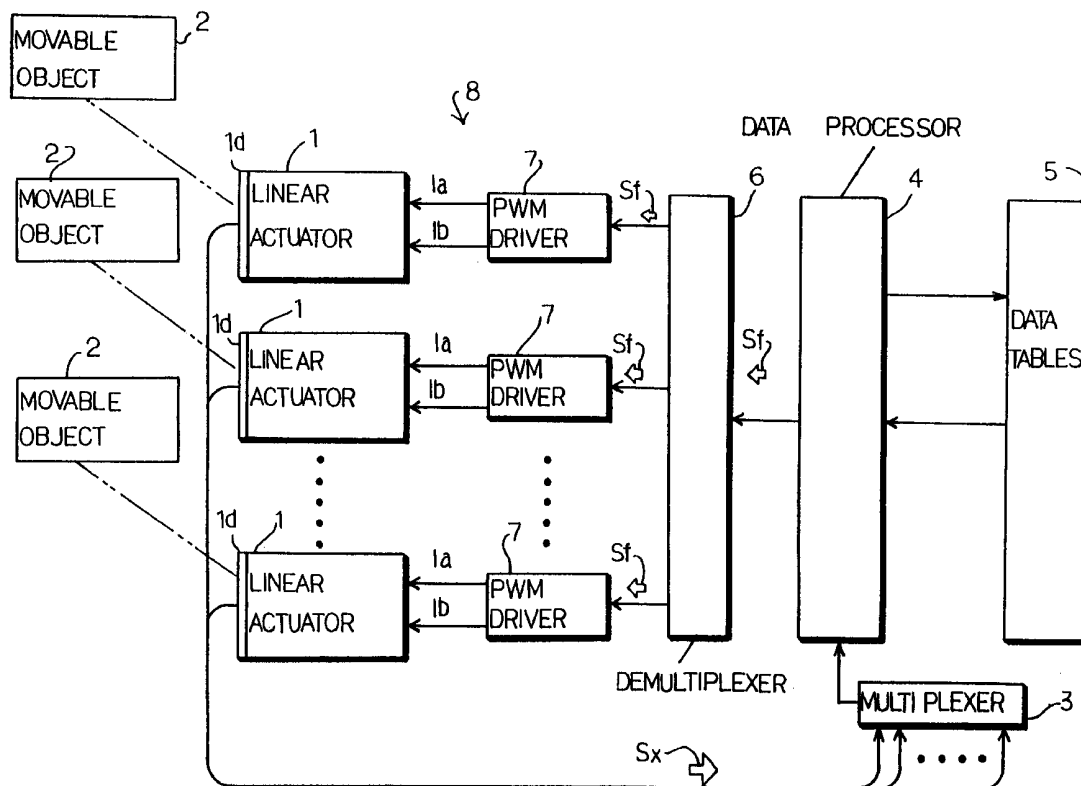

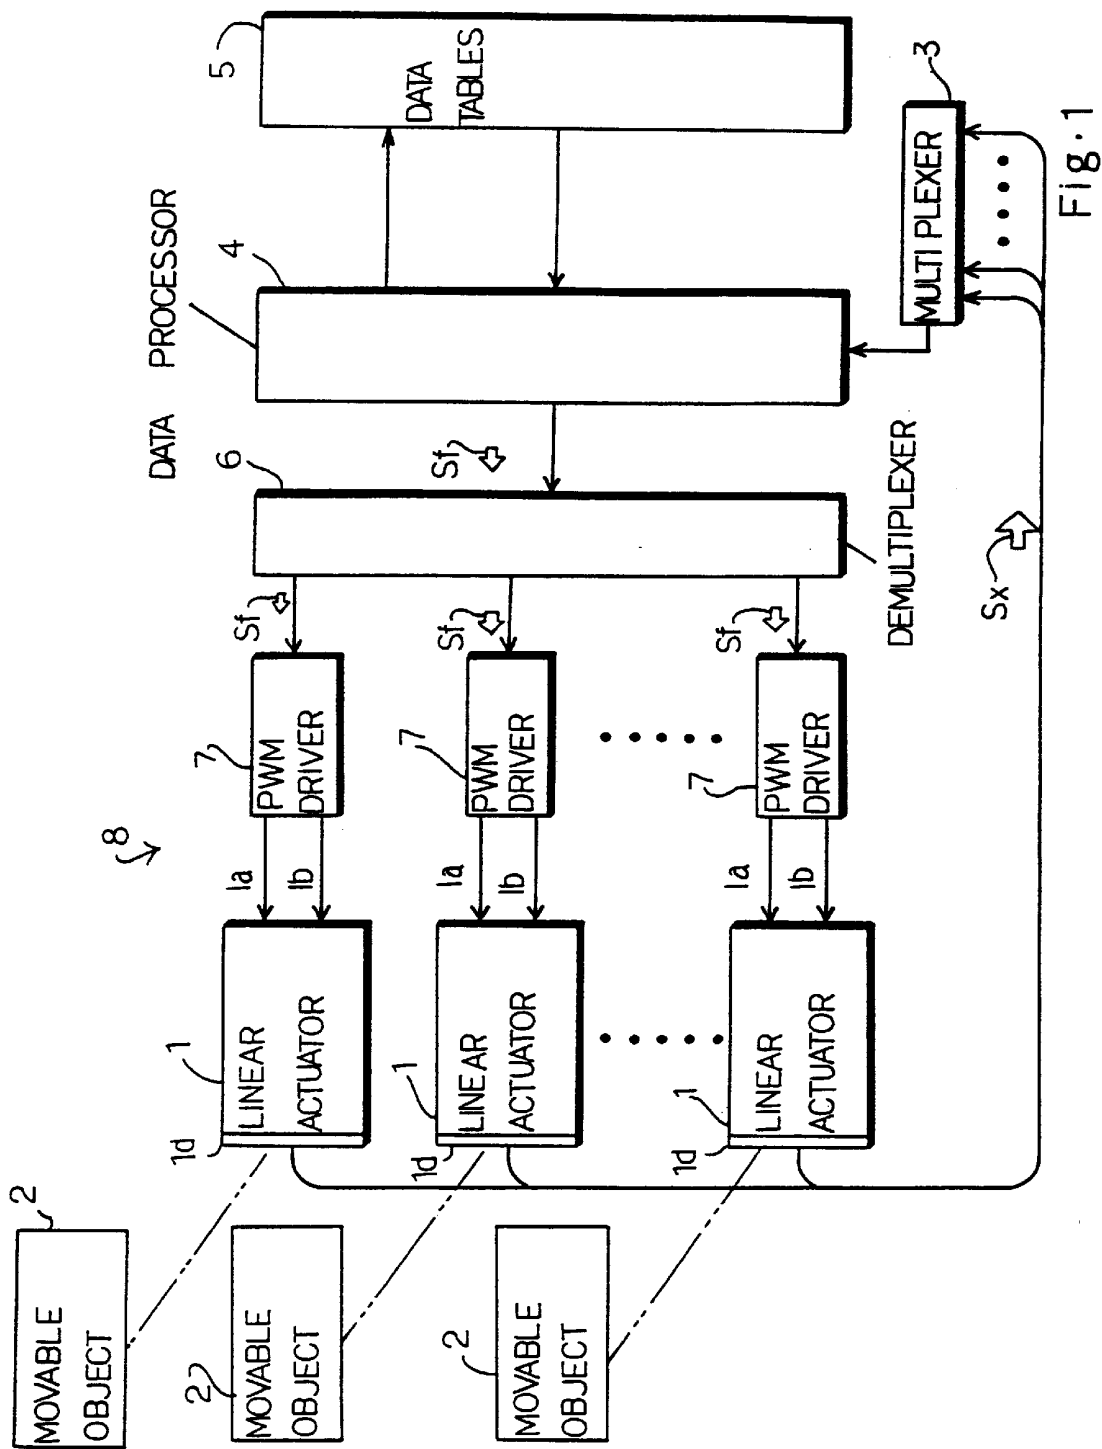


Fig. 1

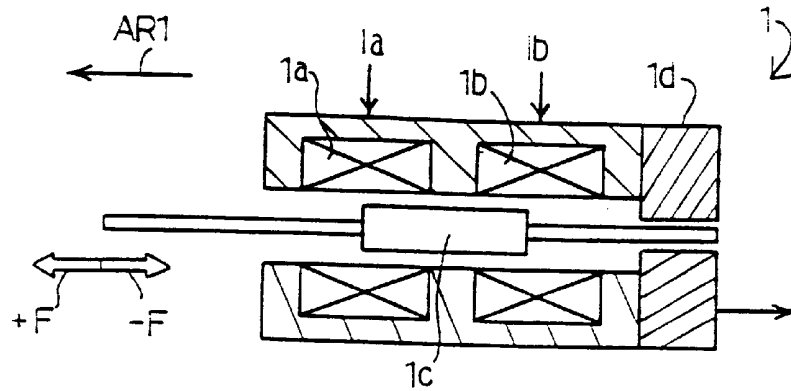


Fig. 2

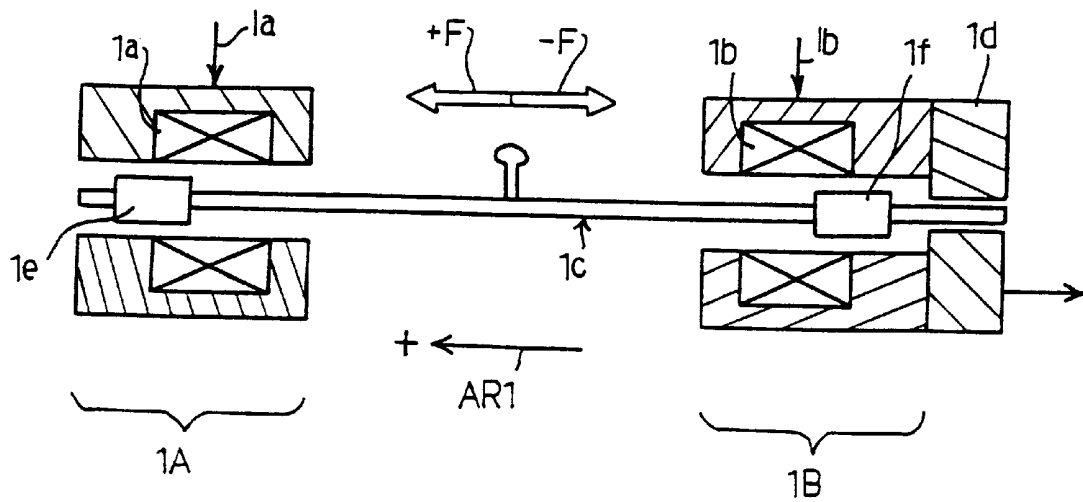


Fig. 3

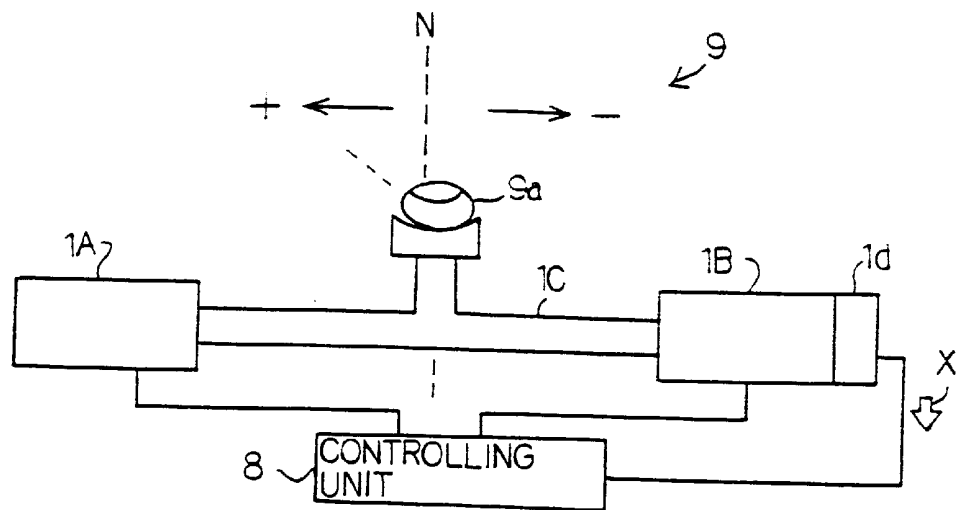


Fig. 4A

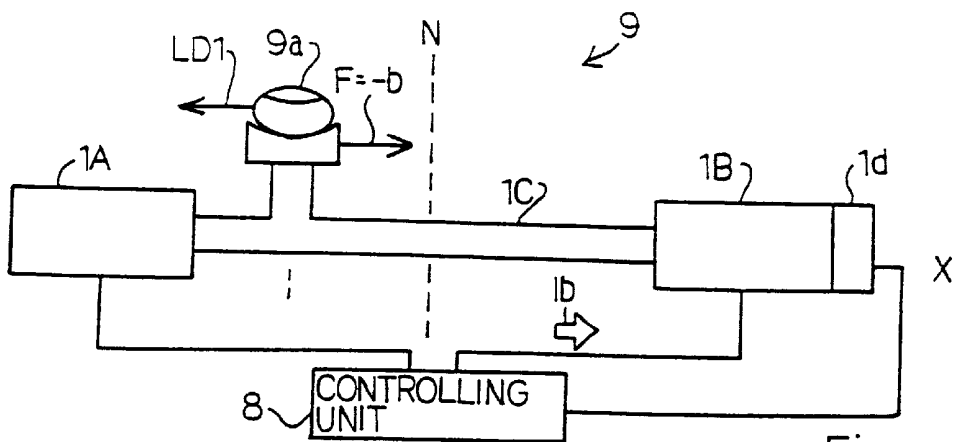


Fig. 4B

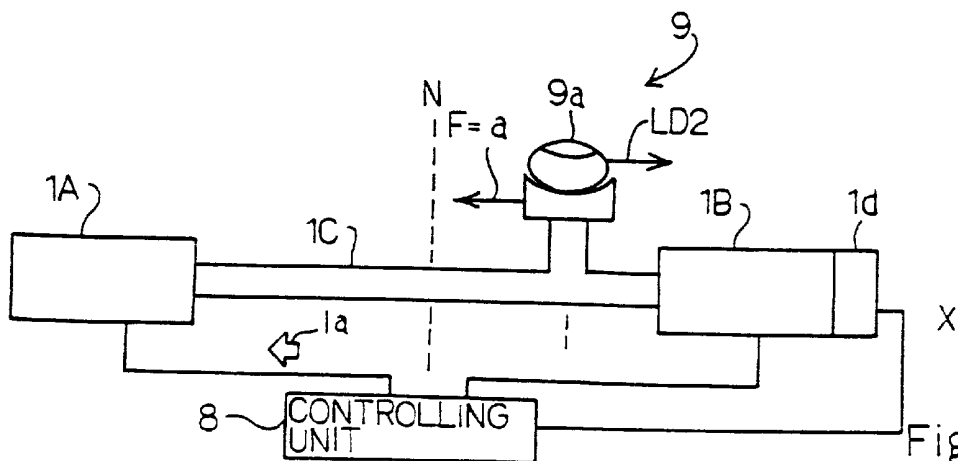


Fig. 4C

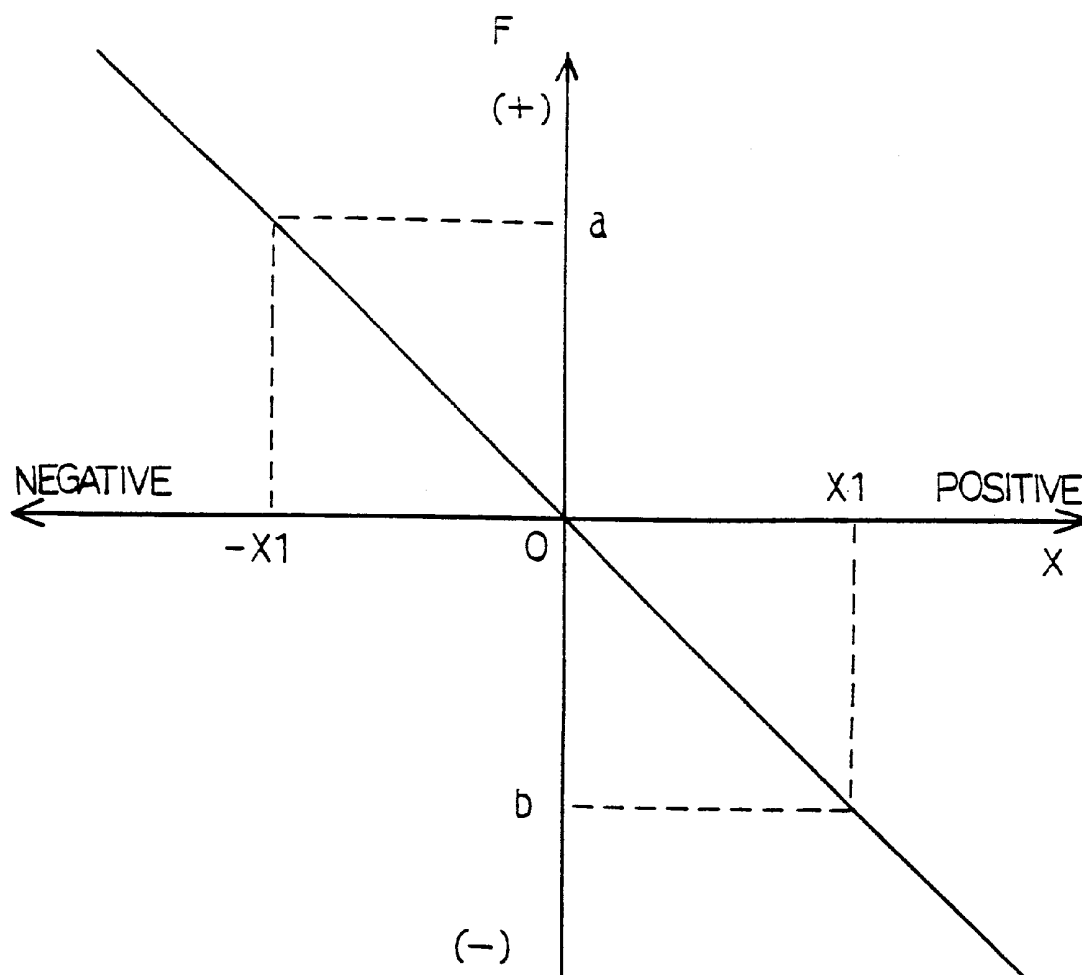
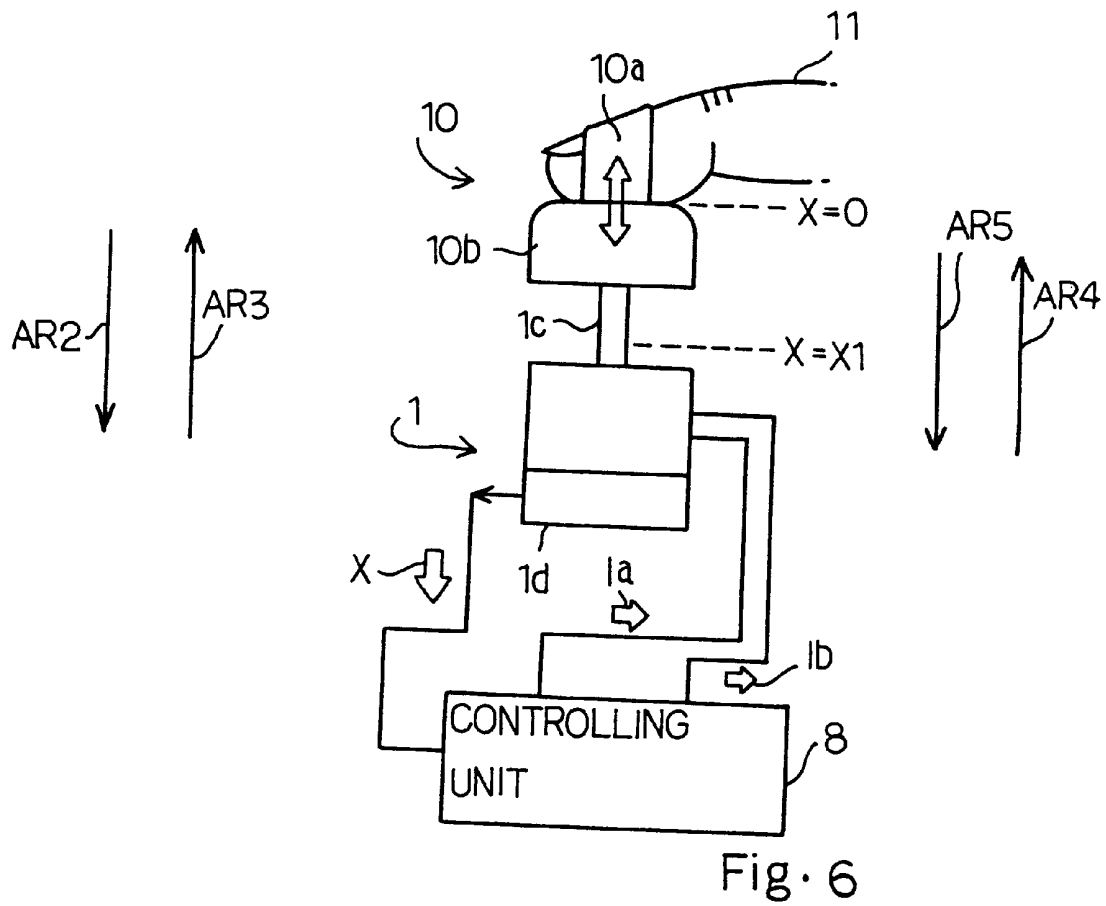
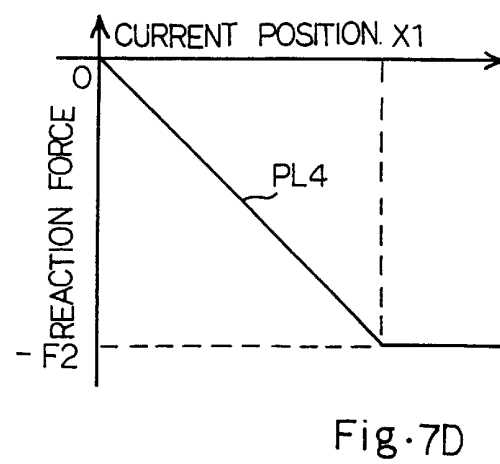
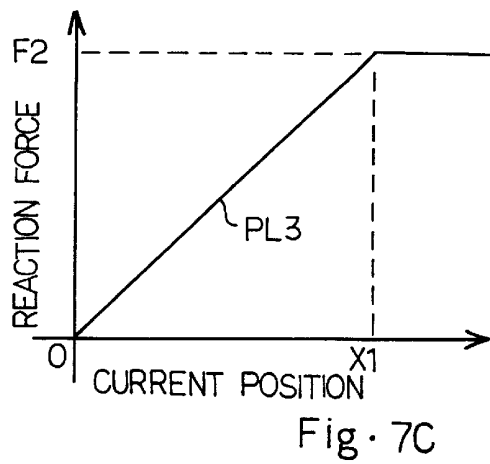
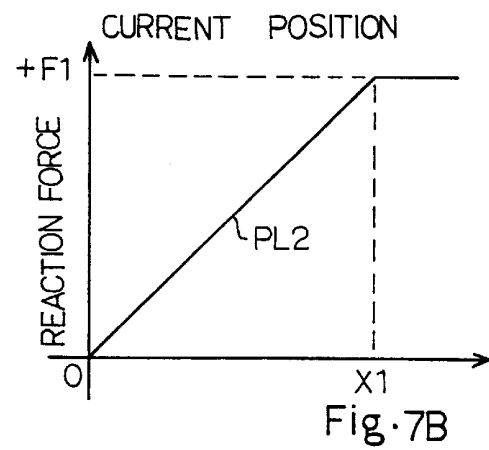
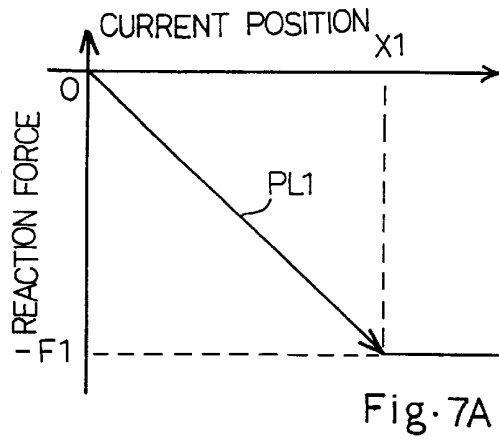


Fig. 5





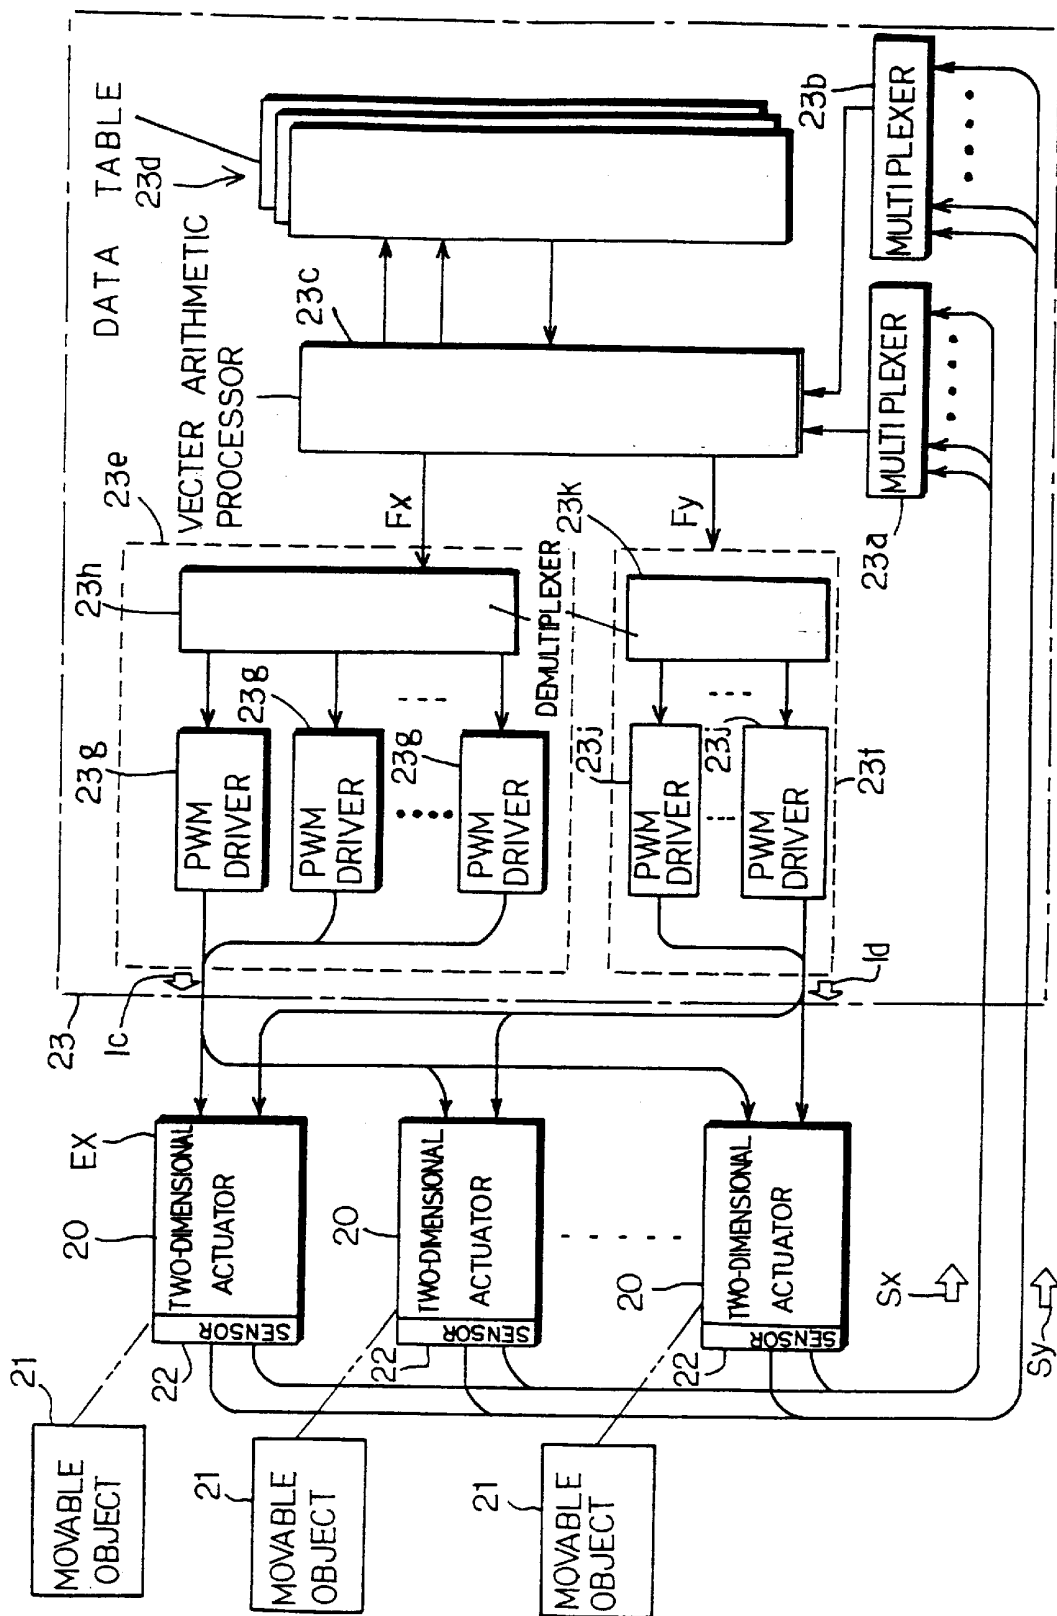


Fig. 8

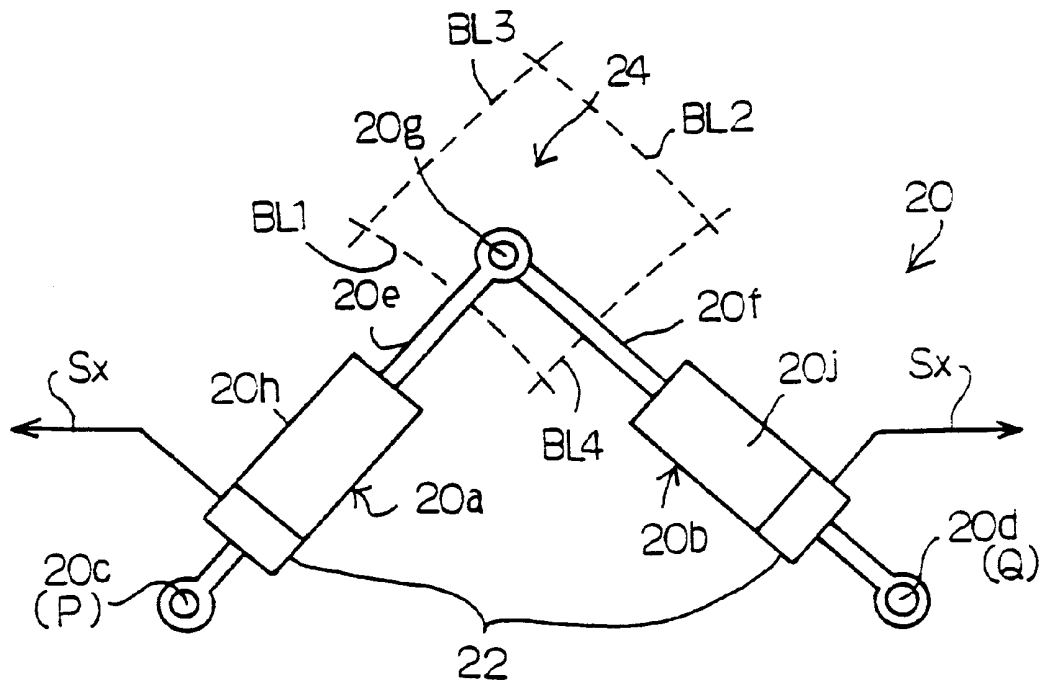


Fig. 9

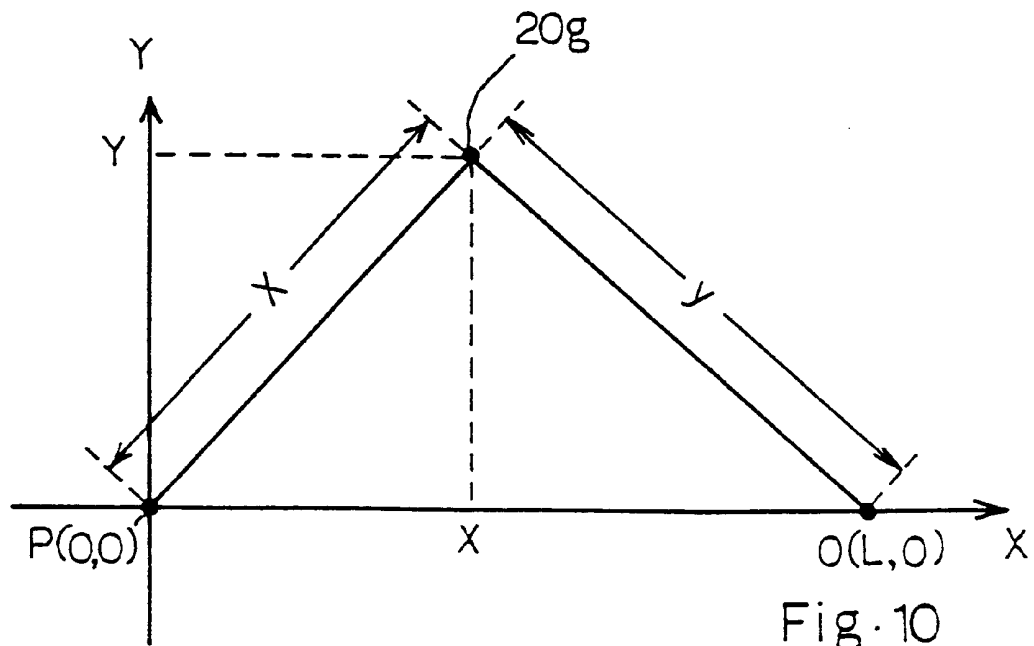


Fig. 10

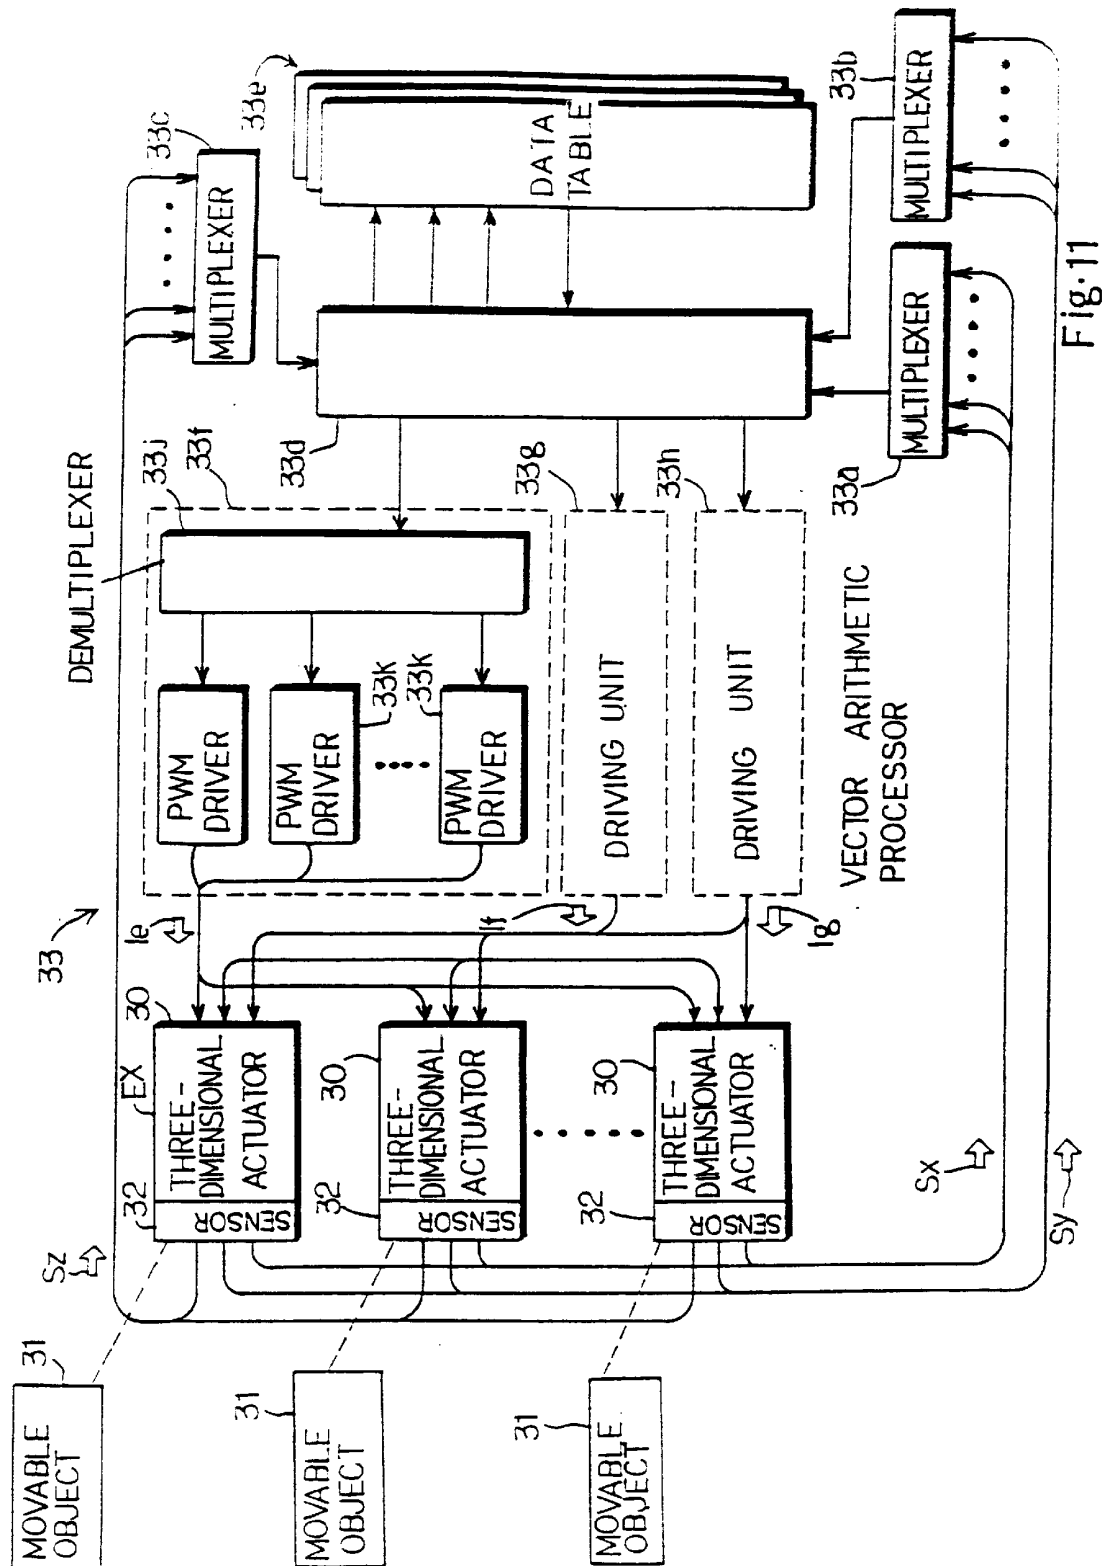


Fig. 11

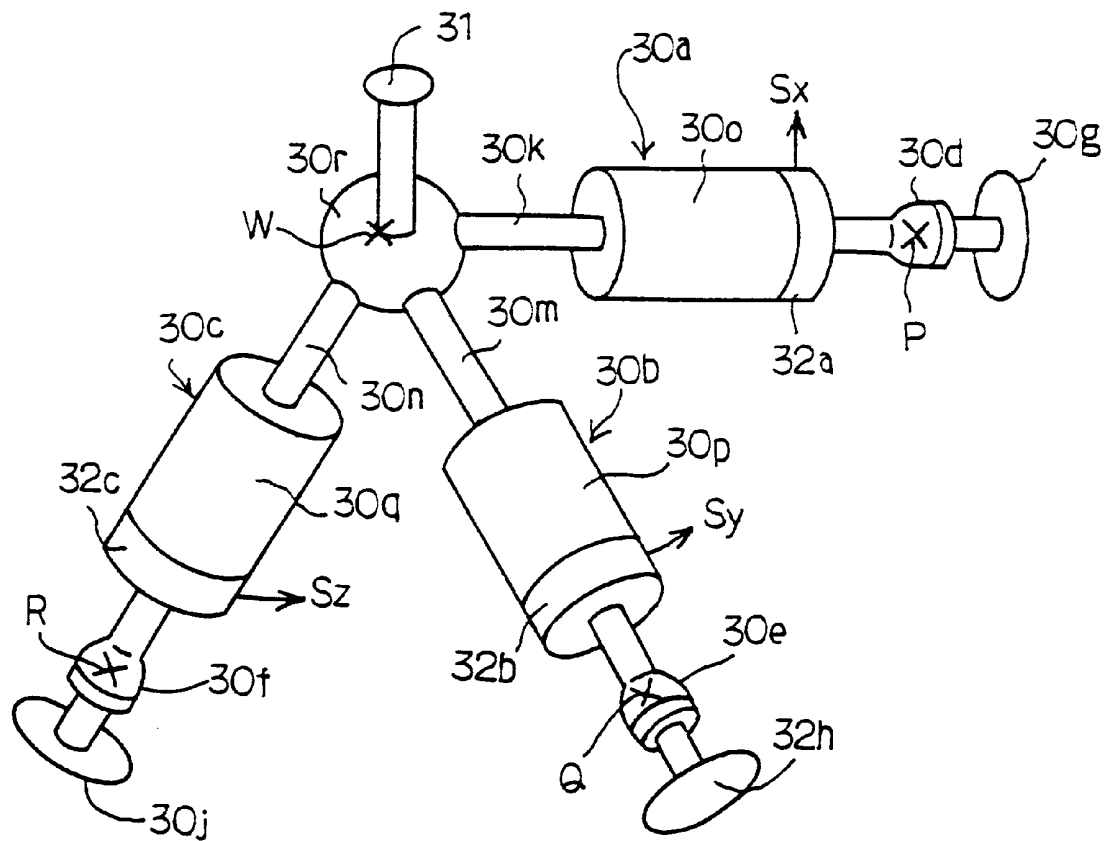


Fig. 12

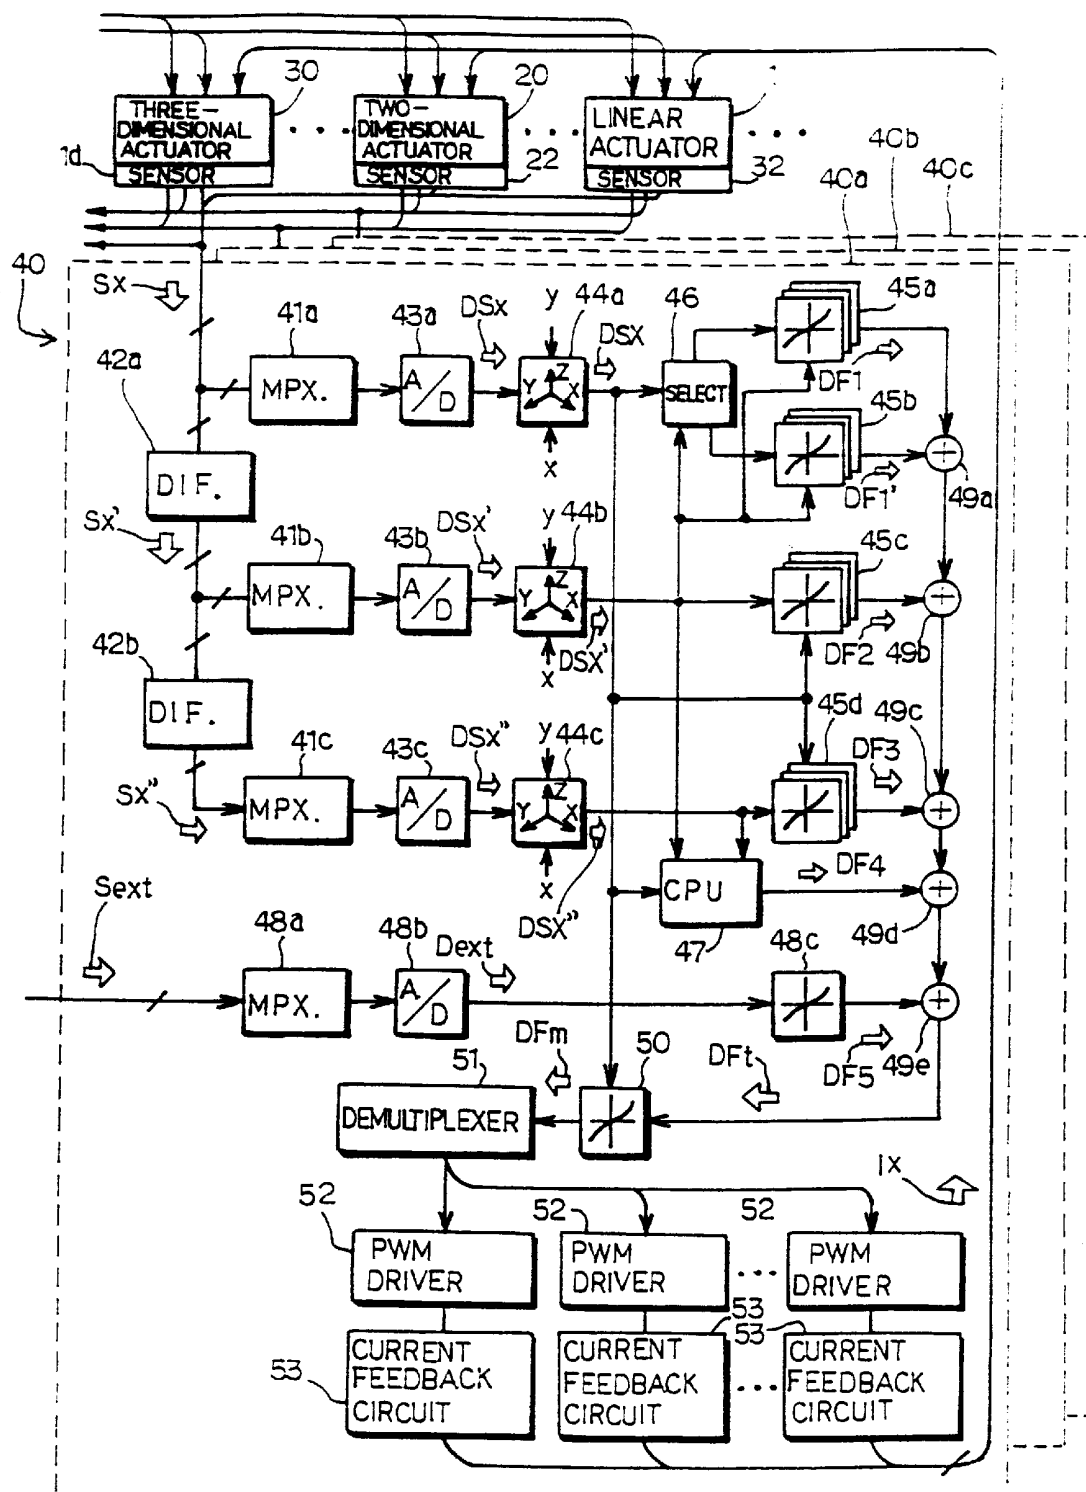


Fig. 13

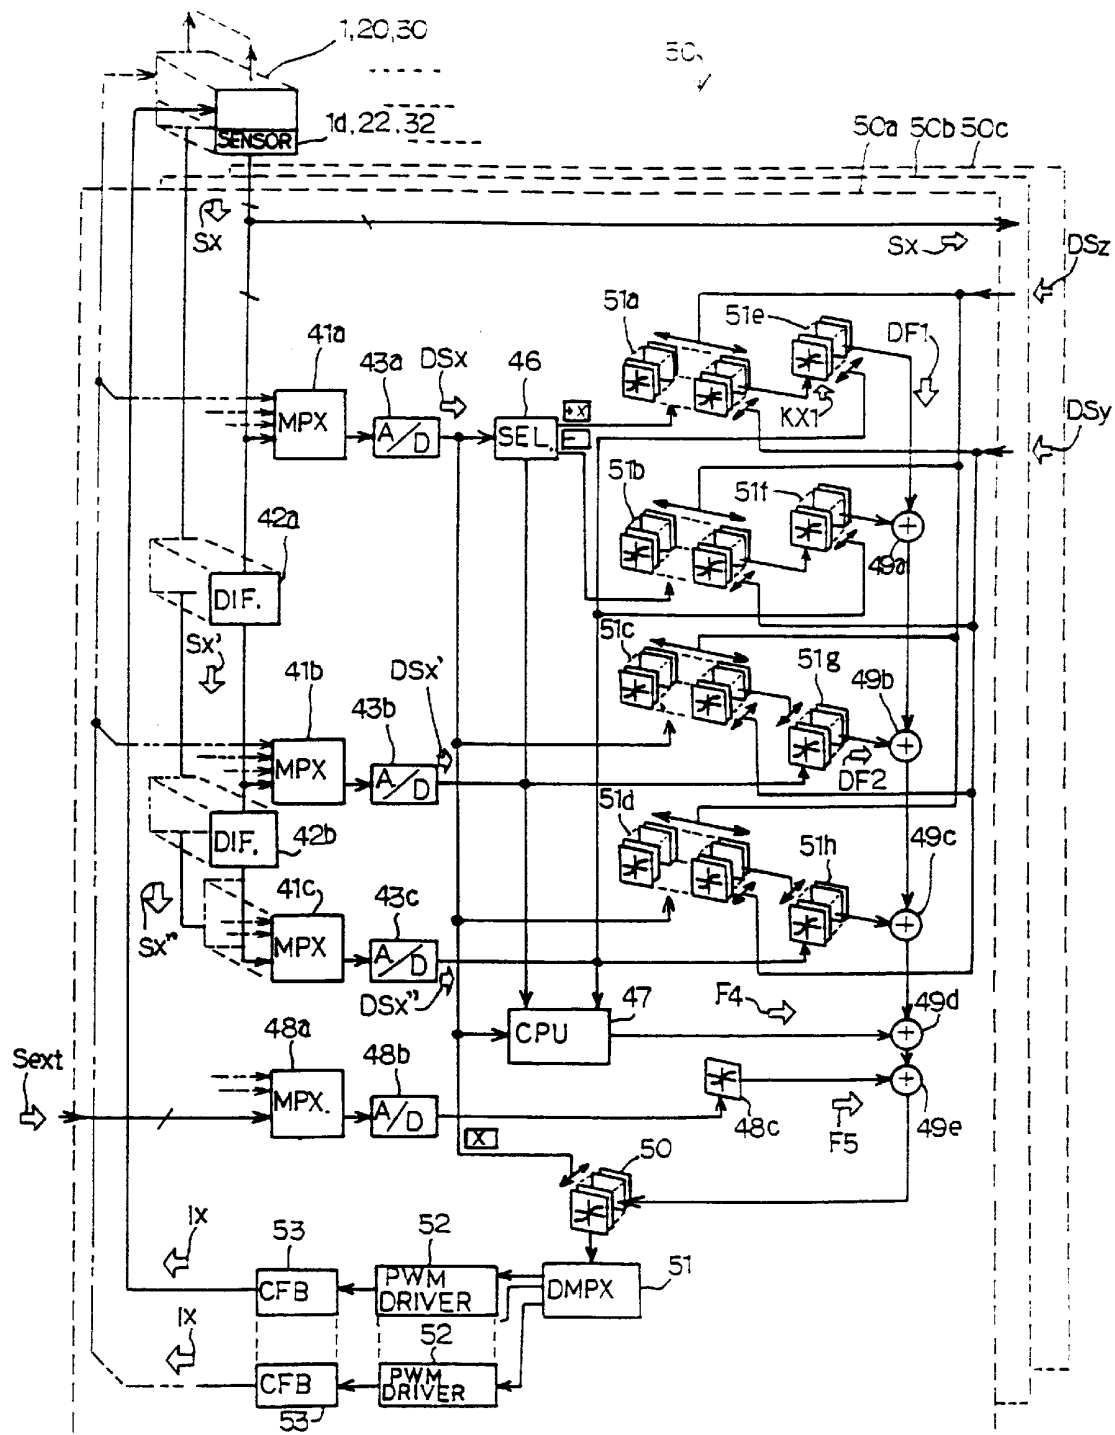


Fig. 14

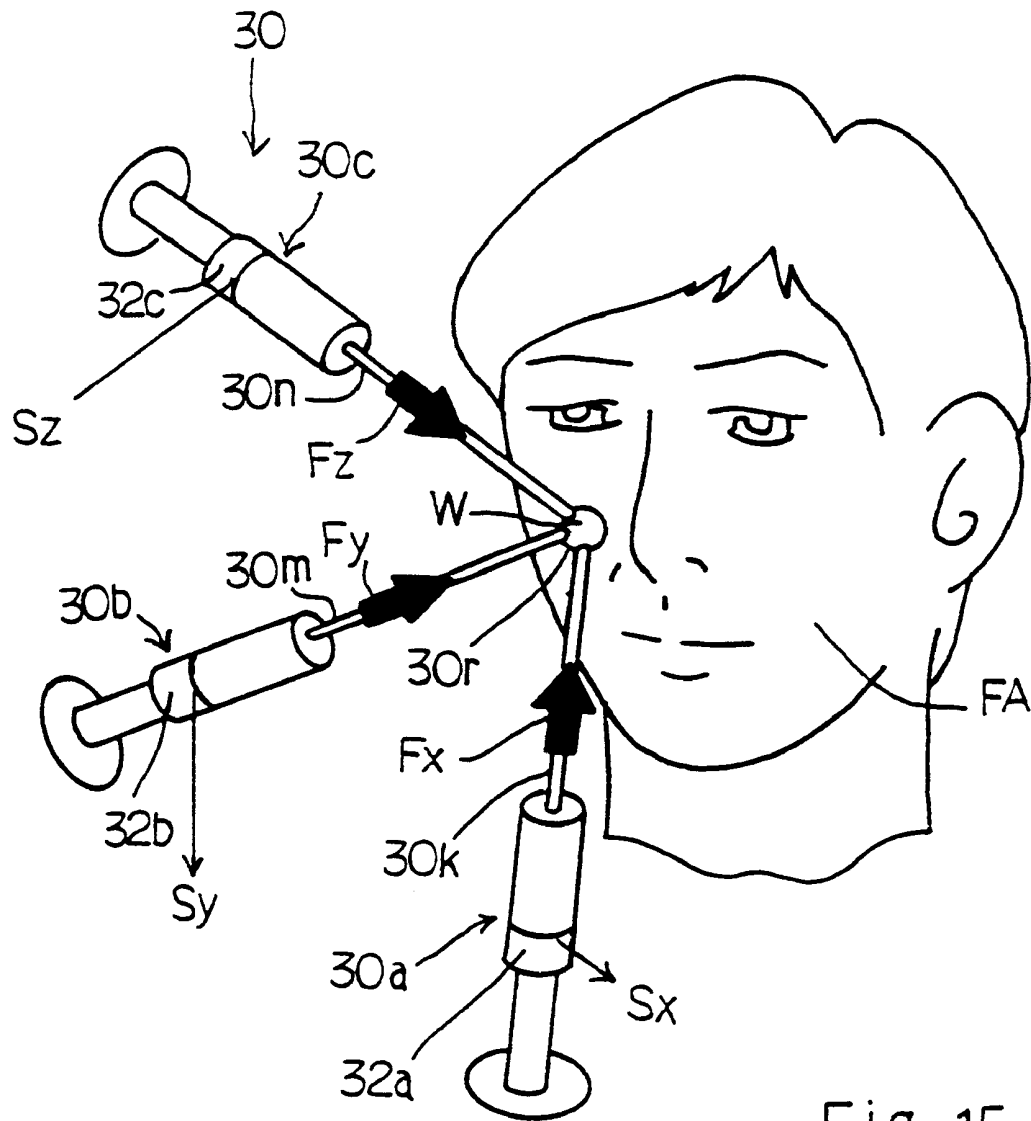


Fig. 15

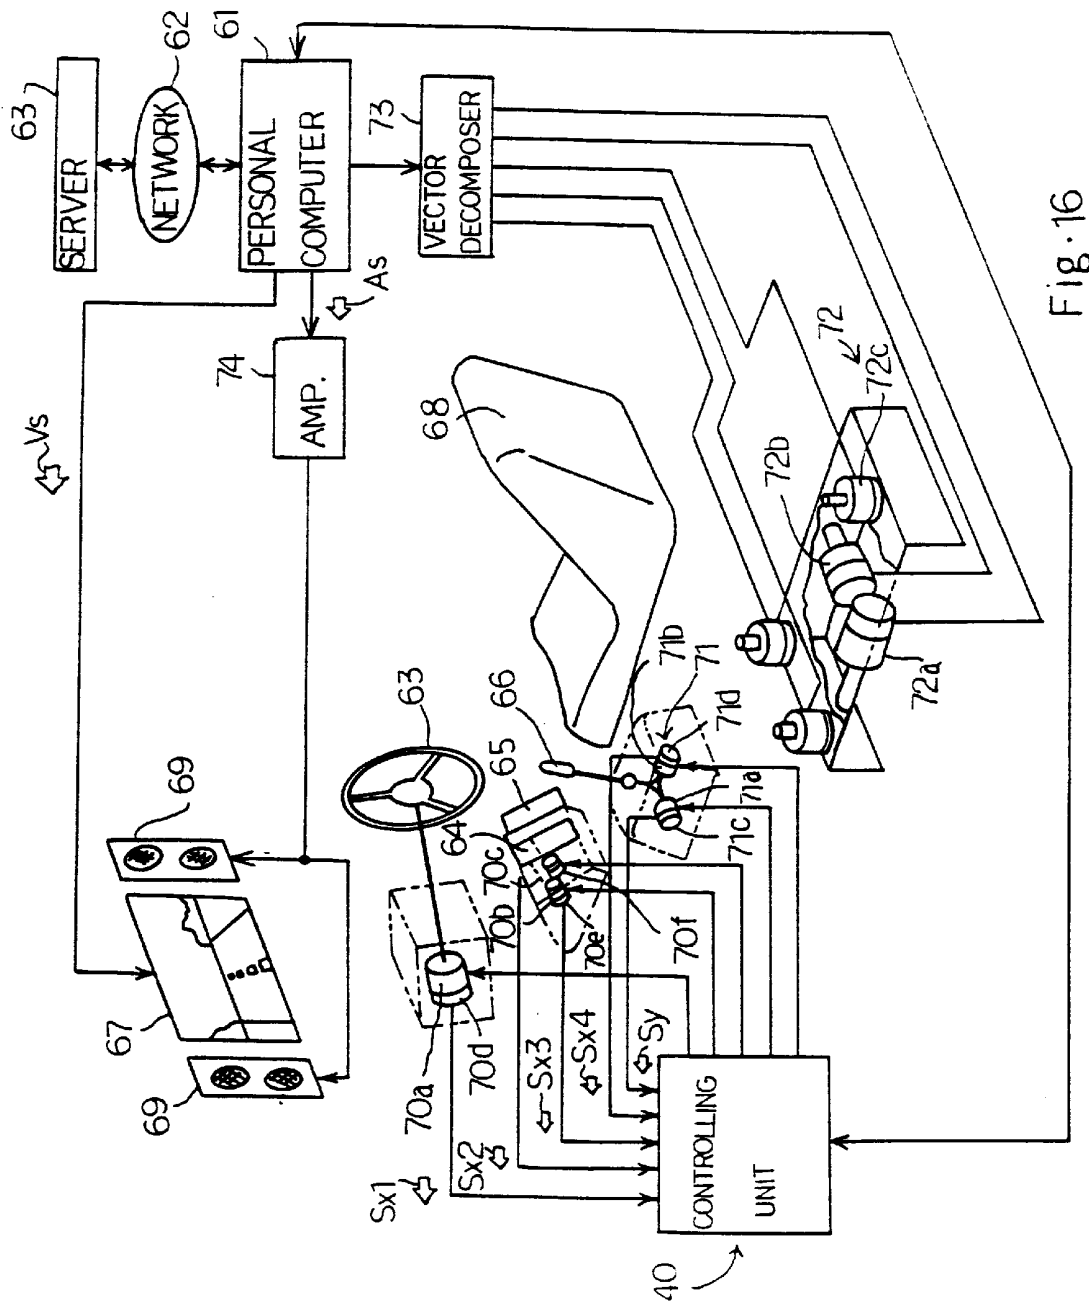


Fig. 16

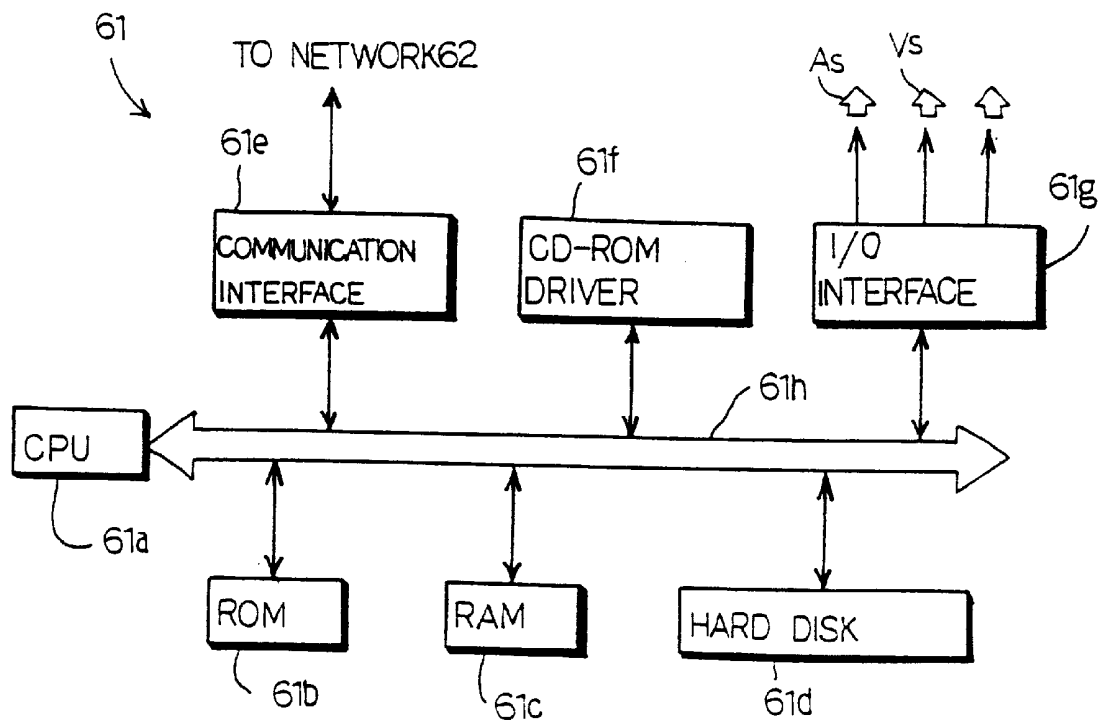
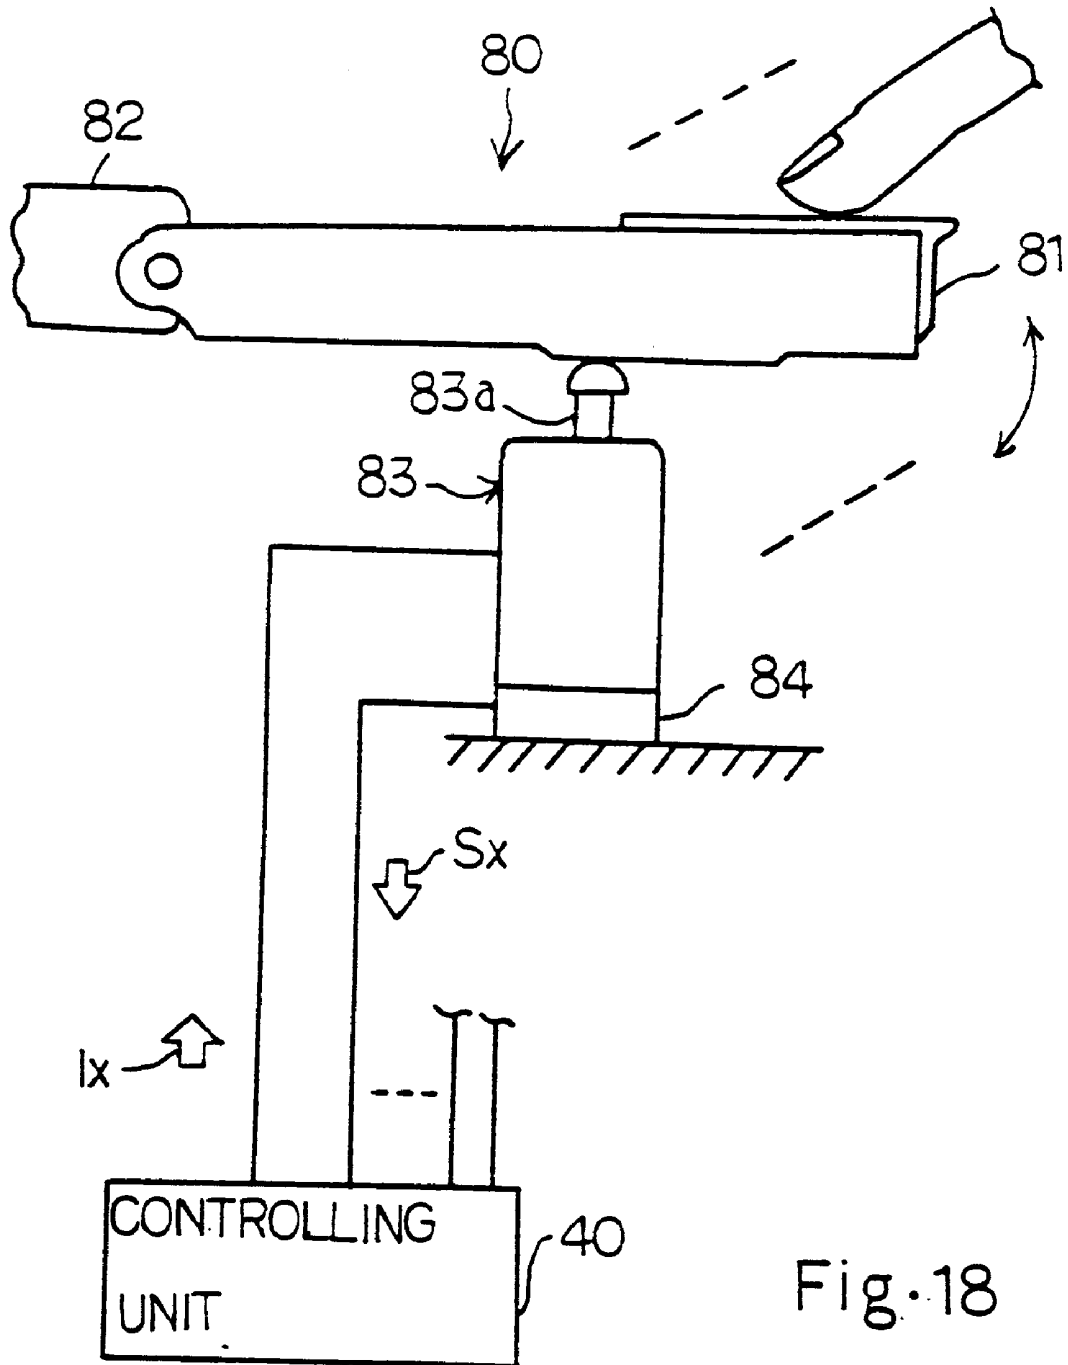
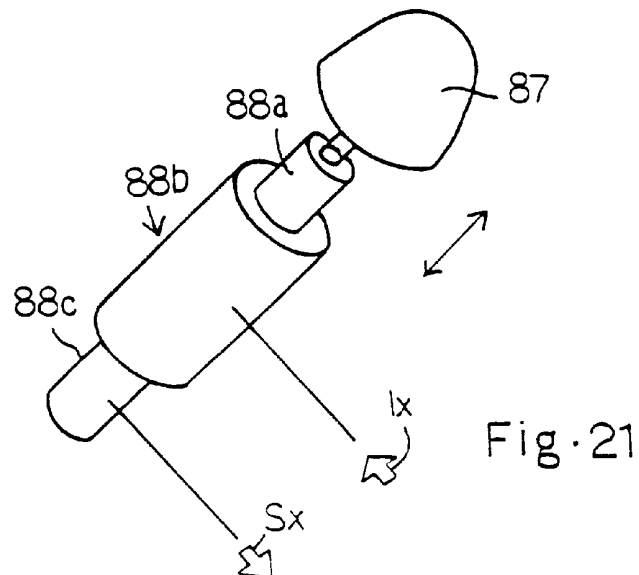
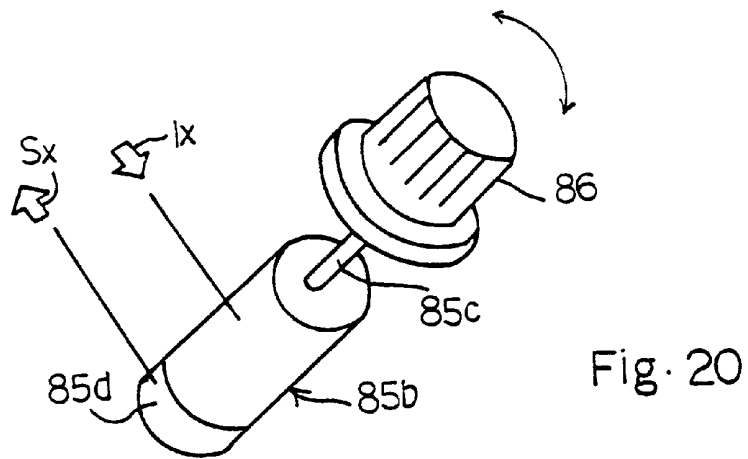
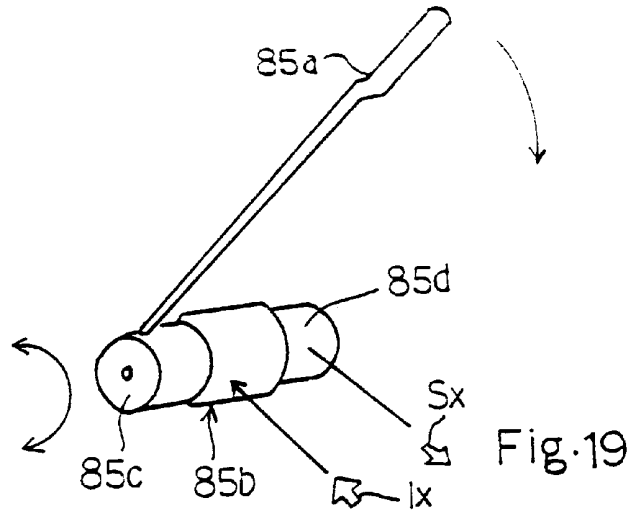


Fig. 17





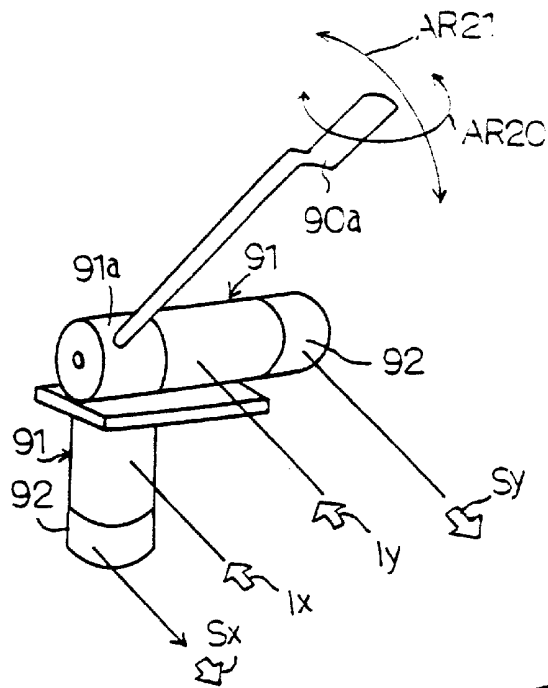


Fig. 22

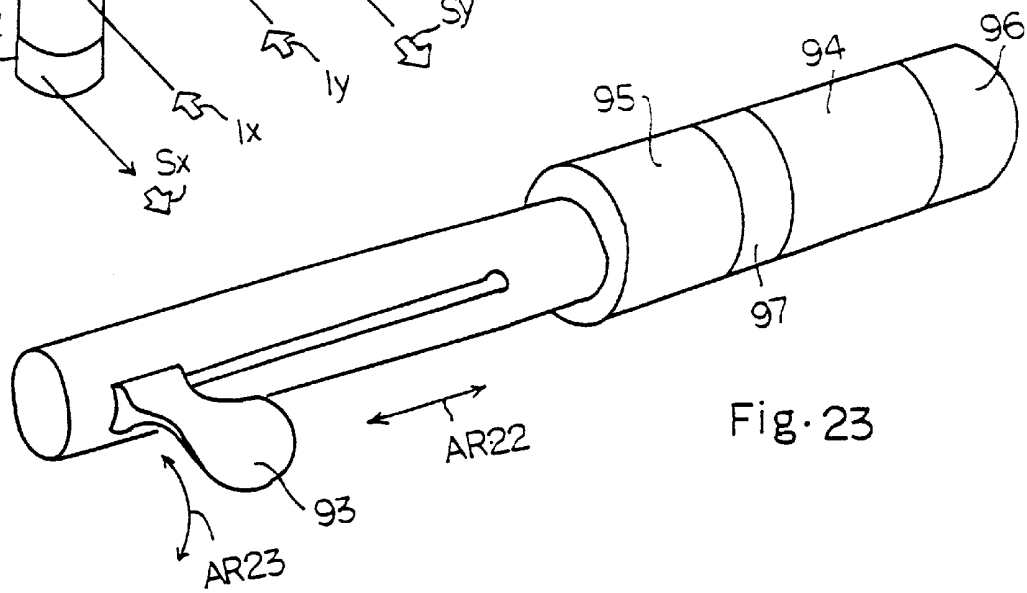


Fig. 23

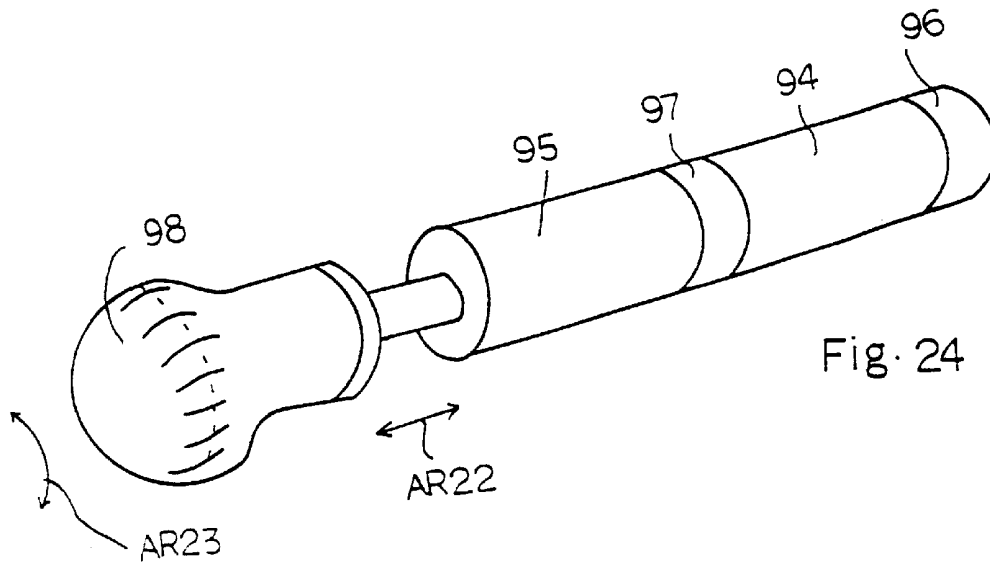


Fig. 24

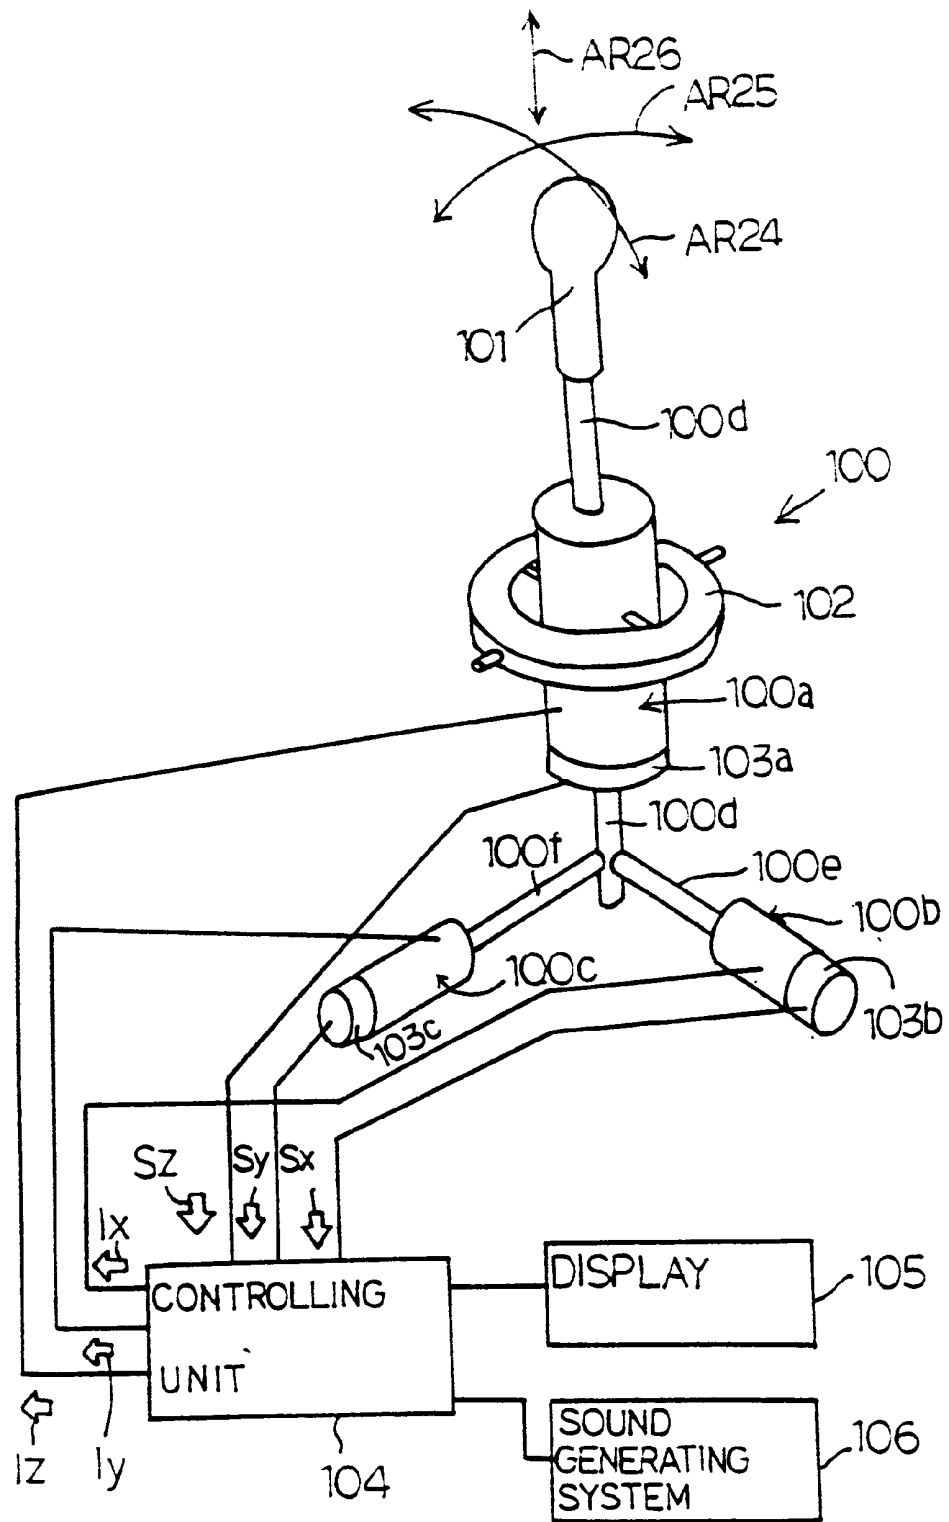


Fig. 25




Fig. 26




Fig. 27

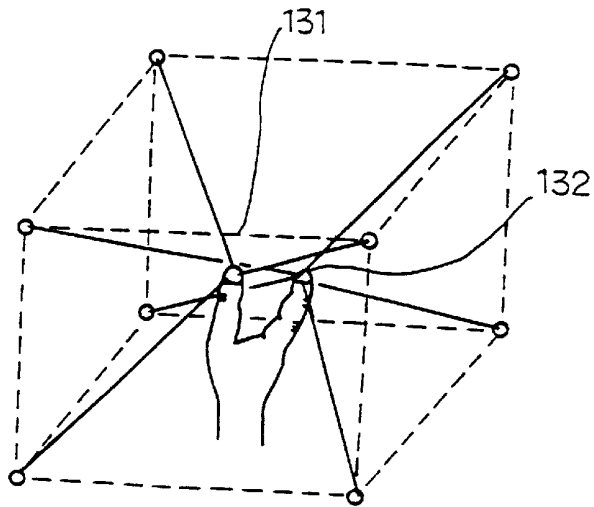


Fig. 28

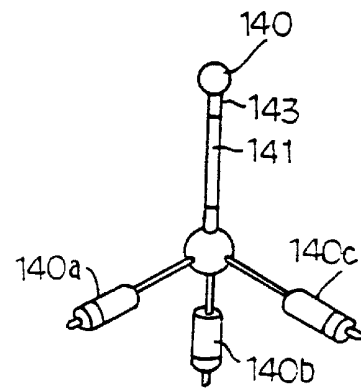


Fig. 29

INNER FORCE SENSE CONTROLLER FOR PROVIDING VARIABLE FORCE TO MULTIDIRECTIONAL MOVING OBJECT, METHOD OF CONTROLLING INNER FORCE SENSE AND INFORMATION STORAGE MEDIUM USED THEREIN

FIELD OF THE INVENTION

This invention relates to a controller for an inner force sense and, more particularly, to an inner force sense controller for providing variable resistance or variable power assist to a multidirectional moving object.

DESCRIPTION OF THE RELATED ART

An acoustic piano generates piano tones in response to fingering on the keyboard through a complicated action. A key is linked with a key action mechanism, and the key action mechanism drives a hammer for rotation. A set of strings is opposed to the hammer, and a damper is associated with the set of strings for attenuating the vibrations. When a pianist depresses the key from the rest position toward the end position, the key causes the key action mechanism to turn, and spaces the damper from the set of strings. The jack of the key action mechanism forcibly rotates the hammer until a certain point. When the key action mechanism reaches the certain point, the jack kicks the hammer, and the hammer escapes from the jack. Then, the hammer starts a free rotation toward the set of strings, and strikes the strings. The strings vibrate for generating the piano sound, and the hammer rebounds on the strings. A back check of the key action mechanism receives the hammer. When the pianist releases the key, the key turns toward the rest position, and damper is brought into contact with the set of strings, again. The hammer is spaced from the back check, and the jack is engaged with the hammer, again. Thus, the behavior of the acoustic piano is so complicated that the reaction to the key motion is not constant.

On the other hand, an electronic keyboard generates an electronic sound through a tone generator. A key switching circuit identifies a depressed key, and gives a timing for generating an electronic sound and a timing for extinguishing the electronic sound. For this reason, the key is only resiliently urged to the rest position, and a player feels the key touch much simpler than the piano key touch.

The electronic keyboard musical instrument may be equipped with an automatic playing systems. The automatic playing system includes solenoid-operated actuators provided under the keys. A controlling unit selectively energizes the solenoid-operated actuators, and the plungers push the keys as if a player selectively depresses the keys. While a pianist is playing a tune on the electronic keyboard musical instrument, the solenoid-operated actuators push the keys against the depressed key, and gives resistance against the finger of the pianist. Thus, the solenoid-operated actuators serve as parts of a key touch controller.

A virtual technology produces a virtual environment by using a computer system, and makes a person experience a virtual reality therein. When a person fingers a solid object, the person feels a reaction to the finger. The virtual technology calls the reaction as "inner force sense", and tries to artificially produce the inner force sense. The resistance against the finger is a kind of the inner force sense. The solenoid-operated actuators only unidirectionally generate the resistance, and, for this reason, the prior art key touch controller is a kind of the unidirectional inner-force-sense controller. In fact, the prior art key touch controller generates the resistance against only the depressed key.

SUMMARY OF THE INVENTION

It is therefore an important object of the present invention to provide an inner force sense controller, which provides variable resistance to a multidirectional moving object.

In accordance with one aspect of the present invention, there is provided an inner force sense controller for giving a force to a manipulator depending upon a current position of the manipulator comprising an actuator connected to the manipulator and driving the manipulator in more than one direction, a detector for detecting the current position of the manipulator, a controller connected to the actuator and the detector, and producing a controlling signal representative of the force to be produced by the actuator, and a driver responsive to the controlling signal for energizing the actuator, thereby exerting the force to the manipulator.

In accordance with another aspect of the present invention, there is provided a method for controlling an inner force sense comprising the steps of producing a piece of status information representative of a current status of a manipulator movable in more than one direction, determining the magnitude of a force on the basis of the current status, and exerting the force on the manipulator for imparting the inner force sense.

In accordance with yet another aspect of the present invention, there is provided an information storage medium for storing a controlling program, and the controlling program comprises the steps of producing a piece of status information representative of a current status of a manipulator movable in more than one direction, determining the magnitude of a force on the basis of the current status, and exerting the force on the manipulator for imparting the inner force sense.

In accordance with still another aspect of the present invention, there is provided an inner force sense controller for exerting a force on a manipulator movable in more than one direction by using an actuator comprising a means for receiving a program through an information communicating network, and the program includes the steps of producing a piece of status information representative of a current status of a manipulator movable in more than one direction, determining the magnitude of a force on the basis of the current status, and exerting the force on the manipulator for imparting the inner force sense.

BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the inner force sense controller will be more clearly understood from the following description taken in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram showing the arrangement of an inner force sense controller according to the present invention;

FIG. 2 is a cross sectional view showing the structure of a linear actuator incorporated in the inner force sense controller,

FIG. 3 is a cross sectional view showing the structure of another linear actuator;

FIGS. 4A to 4C are schematic views showing a slide switch associated with the inner force sense controller and having a knob at different positions;

FIG. 5 is a graph showing the position of a knob and target force urging the knob toward a neutral position;

FIG. 6 is a side view showing a button key associated with the inner force sense controller according to the present invention;

3

FIGS. 7A to 7D are graph showing different kinds of relation between the position of the button key and force exerted on the button key;

FIG. 8 is a block diagram showing another inner force sense controller according to the present invention;

FIG. 9 is a schematic view showing a two-dimensional actuator incorporated in the inner force sense controller;

FIG. 10 is an orthogonal coordinates used in the calculation of the position of a moving object;

FIG. 11 is a block diagram showing yet another inner force sense controller according to the present invention;

FIG. 12 is a perspective view showing a three-dimensional actuator incorporated in the inner force sense controller shown in FIG. 11;

FIG. 13 is a block diagram showing another inner force sense controller according to the present invention;

FIG. 14 is a block diagram showing another inner force sense controller according to the present invention;

FIG. 15 is a schematic view showing a control of inner force sense on a human face;

FIG. 16 is a schematic view showing a driving simulator equipped with the inner force sense controller;

FIG. 17 is a block diagram showing the arrangement of circuit components incorporated in a personal computer forming a part of the driving simulator;

FIG. 18 is a side view showing a keyboard associated with the inner force sense controller according to the present invention;

FIG. 19 is a perspective view showing a lever associated with the inner force sense controller according to the present invention;

FIG. 20 is a perspective view showing a dial associated with the inner force sense controller according to the present invention;

FIG. 21 is a perspective view showing a push-down button switch associated with the inner force sense controller according to the present invention;

FIG. 22 is a perspective view showing a two-dimensional manipulator incorporated in a musical instrument and controlled by the inner force sense controller according to the present invention;

FIG. 23 is a perspective view showing a trombone type musical instrument equipped with the two-dimensional manipulator;

FIG. 24 is a perspective view showing another two-dimensional manipulator incorporated in a musical instrument;

FIG. 25 is a perspective view showing another musical instrument equipped with a three-dimensional manipulator according to the present invention;

FIG. 26 is a perspective view showing a joy stick associated with the inner force sense controller according to the present invention;

FIG. 27 is a perspective view showing a shape recognition system associated with the inner force sense controller according to the present invention;

FIG. 28 is a perspective view showing a three-dimensional shape recognition system equipped with the inner force sense controller according to the present invention, and

FIG. 29 is a perspective view showing a remote cooperation system equipped with the inner force sense controller according to the present invention.

4

DESCRIPTION OF THE PREFERRED EMBODIMENTS

First Embodiment

Referring to FIG. 1 of the drawings, the inner force sense controller embodying the present invention comprises a plurality of linear actuators 1 respectively associated with movable objects 2. The linear actuator 1 comprises coils 1a/1b and a plunger 1c of iron slidably inserted into the coils 1a/1b. The leading end of the plunger 1c is engaged with the movable object 2. A sensor 1d monitors the plunger, and determines the current plunger position X with respect to a home position where the plunger is maintained without supply of electric current to the coils 1a/1b. The sensor 1d produces a positional signal Sx representative of the current plunger position X.

When electric current 1a energizes the coil 1a, the coil 1a creates magnetic field, and the electromagnetic force attracts the plunger 1c toward the coil 1a. Then, the plunger 1c is moved in the direction indicated by arrow AR1, and the plunger 1c exerts force +F on the moving object 2. On the other hand, when electric current 1b energizes the other coil 1b, the plunger 1c is moved in the opposite direction, and negative force -F is exerted on the moving object 2. Thus, the solenoid-operated actuator 1 is bi-directionally

The coils 1a and 1b may be spaced from each other as shown in FIG. 3. The coil 1a is spaced from the other coil 1b, and the solenoid-operated actuator is separated into two portions 1A and 1B. The two portions 1A/1B selectively exert the electromagnetic force on the end portions 1e/1f of the plunger 1c. The plunger 1c is elongated, and is connected at the intermediate point thereof. When the electric current 1a energizes the coil 1a, the electromagnetic force is exerted on the end portion 1e, and the plunger is moved in the direction of arrow AR1 so as to exert the positive force +F on the moving object 2. On the other hand, when the electric current 1b energizes the coil 1b, the electromagnetic force is exerted on the other end portion 1f, and the plunger 1c is moved in the opposite direction to allow AR1 so as to exert the negative force -F on the moving object 2.

The inner force sense controller further comprises a multiplexer 3, a data processor 4 and data tables 5. The multiplexer 3 is connected to the sensors 1d of the linear actuators 1, and the positional signals Sx are supplied in parallel from the sensors 1d of the linear actuators 1 to the multiplexer 3. The multiplexer 3 assigns time slots to the positional signals Sx, and the positional signals Sx are supplied in serial from the multiplexer 3 to the data processor 4. The data processor 4 calculates a current plunger velocity X' on the basis of the current plunger position X and the previous plunger position, and in turn calculates a current plunger acceleration X'' on the basis of the current plunger velocity X' and the previous plunger velocity. The data processor 4 further calculates a target force F for each of the linear actuator 1 by using an equation of motion such as $F = MX'' + \rho X' + \kappa X$. M is the mass, ρ is a coefficient of viscosity and κ is a spring constant. MX'' , $\rho X'$ and κX forms a set of parameters representative of a target force F, and are stored in the data tables 5 for each of the linear actuators 1. The data tables 5 are implemented by a read only memory device.

The inner force sense controller further comprises a demultiplexer 6 and a plurality of pwm (Pulse Width Modulation) drivers 7 respectively associated with the linear drivers 1. The demultiplexer 6 is connected between the data processor 4 and the pwm drivers 7, and distributes data signals Sf each representative of the target reaction force F to the pwm drivers 7. The pwm driver 7 regulates the electric

5

current Ia/Ib to a target value equivalent to the target force F , and selectively supplies the electric current Ia/Ib to the coil $1a/1b$ of the associated linear actuator **1**. The multiplexer **3**, the data processor **4**, the data tables **5**, the demultiplexer **7** and the pwm drivers **7** as a whole constitute a controlling unit **8**.

FIGS. **4A** to **4C** illustrate an application of the inner force sense controller. The inner force sense controller provides a resistance against bi-directional sliding motion of an array of slide switches **9**. Each of the slide switches **9** has a knob **9a** connected to the plunger **1c** of the linear actuator **1** shown in FIG. **3**, and the knob **9a** is at the mid point between the two-portions **1A** and **1B** as shown in FIG. **4A**. When the knob **9a** is at the mid point, the slide switch stays at neutral position **N**, and the sensor **1d** supplies a positional signal S_x representative of the neutral position **N** or distance "0" to the multiplexer **3** of the controlling unit **8**.

In this instance, the MX'' and $\rho X'$ are assumed to be zero, and the target reaction force F is dependent on κX only. For this reason, the target reaction force F is proportional to the value of the positional signal S_x or the distance from the neutral position **N** as shown in FIG. **5**. The target reaction force F is stored in the data tables **5** in terms of the distance from the neutral position, and the data processor **4** supplies the current position X to the data tables **5**. Then, the target reaction force F corresponding to the current position X is read out from the data tables **5**, and the data processor **4** supplies the target reaction force F through the demultiplexer **6** to associated one of the pwm driver **7**.

If an operator exerts force $LD1$ on the knob **9a** so as to move it to position $X1$ as shown in FIG. **4B**, the data processor **4** determines the target reaction force $F=-b$, and the associated pwm driver **7** supplies the electric current Ib to the coil **1b**. The electromagnetic force $F=-b$ rightwardly urges the plunger **1c**, and the operator feels the target reaction force $F=-b$ to be the inner force sense. When the operator releases the knob **9a**, the knob **9a** returns to the neutral position **N**, because the target reaction force F is still produced depending on the position X .

On the other hand, if an operator exerts force $LD2$ on the knob **9a** so as to move it to position $-X1$ as shown in FIG. **4C**, the data processor **4** determines the target reaction force $F=a$, and the associated pwm driver **7** supplies the electric current Ia to the coil **1a** so as to generate the electromagnetic force $F=a$. The electromagnetic force $F=a$ leftwardly urges the plunger **1c**, and the operator feels the target reaction force $F=a$ to be the inner force sense. When the operator releases the knob **9a**, the knob **9a** returns to the neutral position **N**, because the target force F is still produced in dependent on the position X .

Thus, the inner force sense controller applies the reaction force F to the slide switch **9**, and the magnitude of the reaction force F is increased together with the distance between the current knob position X and the neutral position **N**. The knob **9a** is urged toward the neutral position **N** at all times.

FIG. **6** illustrates another application of the inner force sense controller according to the present invention. The inner force sense controller is provided for an array of button keys **10**, and the button key **10** has a loop **10a** fixed to a button **10b** thereof. An operator inserts a finger **11** into the loop **10a**, and manipulates the button key **10**. The button **10b** is connected to the plunger **1c** of the linear actuator shown in FIG. **2**. When no force is exerted on the button **10b**, the button key **10** stays at the home position. The controlling unit **8** selectively supplies the electric current Ia/Ib to the coil $1a/1b$, and provides the resistance against the motion of the key **10**.

6

When the operator depresses the button **10b** in the direction indicated by arrow **AR2**, the button **10b** retracts the plunger **1c** into the coils $1a/1b$, and the sensor **1d** detects a current position X , and reports the Current position X to the controlling unit **8**. The multiplexer **3** transfers the current position X to the data processor **4** at an appropriate timing. In this instance, MX'' and $\rho X'$ are assumed to be zero, and the target reaction force F is proportional to the current position X or the distance between the neutral position "0" and the current position X . However, when the button **10b** reaches the position spaced from the neutral position by $X1$, the target reaction force F becomes constant $-f1/+f1$.

The data tables **5** stores two groups of reaction data. One of the groups is used for the motion indicated by arrow **AR2**, and the other group is used for the motion indicated by arrow **AR3**. Although the groups of reaction data are fixedly assigned to the downward motion and the upward motion, the reaction data groups may be arbitrary selected by the operator. In this instance, plots **PL1** and **PL2** represent the relation between the target reaction force F and the position X for the downward motion and for the upward motion (see FIGS. **7A** and **7B**).

The data processor **4** calculates a current velocity X' on the basis of the current position X and the previous position, and determines the direction of motion **AR2** or **AR3** depending upon the positive/negative value of the current velocity X' .

While the operator is depressing the button **10b** from the neutral position $X=0$, the plunger **1c** is moved in the direction of allow **AR2**, and the sensor **1d** periodically supplies the current key position X through the multiplexer **3** to the data processor **4**. The data processor **4** calculates the current velocity X' , which has a positive value, and selects one of the data groups shown in FIG. **7A**. The target reaction force F has a negative value, and is directed as indicated by arrow **AR4**. The controlling unit **8** gradually increases the amount of electric current Ia , and the positive reaction force F is increased together with the distance from the neutral position $X=0$. The operator feels the increased reaction force F to be the inner force sense. When the button **10b** reaches the position $X1$, the controlling unit **8** does not increase the electric current Ia any more, and the operator **11** feels the reaction force F constant at $-F1$.

On the other hand, while the operator is upwardly pulling the button **10b**, the plunger **1c** is moved in the direction of allow **AR3**, and the sensor **1d** periodically supplies the current key position X through the multiplexer **3** to the data processor **4**. The data processor **4** calculates the current velocity X' , which has a negative value, and selects one of the data groups shown in FIG. **7B**. The target reaction force F has a positive value, and is directed as indicated by arrow **AR5**. The controlling unit **8** keeps the electric current Ib constant until the position $X1$, and the operator feels the reaction force constant at $+F1$. When the button **10b** passes the position $X1$, the controlling unit **8** gradually decreases the amount of electric current Ib , and the positive reaction force F is decreased together with the distance from the neutral position $X=0$. The operator feels the reaction force F decreased. When the button **10b** reaches the neutral position, the controlling unit **8** does not supply the electric current Ib , and the reaction force becomes zero. Thus, the inner force sense controller according to the present invention provides the reaction force F varied with the distance to the button **10b** bi-directionally moved along the linear trajectory.

If the data tables store pieces of control data information indicated by plots **PL3** and **PL4** shown in FIGS. **7C** and **7D**, the inner force sense controller differently produces the

reaction force F . The pieces of control data information shown in FIGS. 7A and 7B are respectively replaced with the pieces of the control data information shown in figures 7C and 7D, respectively. Moreover, the controlling unit 8 decreases the reaction force F to zero when the button 10b stays at any position. In this situation, while the operator is depressing the button 10b, the solenoid-operated actuator 1 generates the force F in the same direction as the button 10b, and the force F assists the operator. Similarly, while the operator is pulling up the button 10b, the solenoid-operated actuator 1 generates the force F in the direction of arrow AR4, and also assists the operator. When the operator stops the button on the way to the position X1, the controlling unit 8 does not supply the electric current to the solenoid-operated actuator 1 any more, and the force F becomes zero. The controlling unit 8 makes the electric current constant after the position X1, and the operator feels the power assist constant at $F2$ or $-F2$. Thus, the inner force sense controller according to the present invention serves as a power assist system.

As will be understood from the foregoing description, the inner force sense controller according to the present invention changes the variation of the force F depending upon the direction of the linear motion, and serves as a reaction generator or a power assist system.

Second Embodiment

Turning to FIG. 8 of the drawings, another inner force sense controller embodying the present invention largely comprises two-dimensional actuators 20 for driving movable objects 21, sensors 22 for producing two kinds of positional data information X and Y and a controlling unit 23 responsive to the two kinds of positional data information X/Y for controlling the two-dimensional actuators 20.

The two-dimensional actuator 20 is implemented by a combination of two linear actuators, and is illustrated in FIG. 9. Two solenoid-operated linear actuators 20a/20b are turnable with respect to pins 20c/20d, and the plungers 20e/20f are turnably connected to the movable object 21 by means of a pin 20g. The controlling unit 23 independently supplies driving current Ic and Id to coils 20h/20j, and the solenoid-operated linear actuators 20a/20b respectively project the plungers 20e/20f from the coils 20h/20j depending upon the amount of driving current Ic/Id . The plungers 20e/20f exert a resultant force on the moving object, and move the object 21 on a virtual plane 24 where the points 20c/20d/20g are. If the solenoid-operated linear actuator 20a keeps the stroke of the plunger 20e minimum, the other solenoid-operated linear actuator 20b moves the pin 20g along broken line BL1 during the projecting motion of the other plunger 20f. On the other hand, if the solenoid-operated linear actuator 20a keeps the stroke of the plunger 20e maximum, the other solenoid-operated linear actuator 20b moves the pin 20g along broken line BL2 during the projection of the plunger 20f. Broken line BL3 indicates the trajectory of the pin 20g, during the projection of the plunger 20e under the maximum stroke of the plunger 20f, and the pin 20g traces broken line BL4 during the projection of the plunger 20e under the minimum stroke of the plunger 20f. Thus, the two-dimensional actuator 20 moves the object 21 in the area defined by broken lines BL1, BL2, BL3 and BL4.

The sensor 22 has two sensor elements, and the sensor elements monitor the plungers 20e/20f, respectively. The sensor element associated with the solenoid-operated actuator 20a generate a first positional signal Sx representative of the current position x of the plunger 20e, and the other sensor element associated with the solenoid-operated actuator 20b generate a second positional signal Sy representative

of the current position y of the plunger 20f. The current positions x/y are representative of the distance between the pins 20c and 20g and between the pins 20d and 20g, respectively.

The controlling unit 23 includes a first multiplexer 23a for assigning a time slot to the first positional signal Sx , a second multiplexer 23b for assigning a time slot to the second positional signal Sy , a vector arithmetic processor 23c, data tables 23d and two driving units 23e and 23f associated with the solenoid-operated linear actuators 20a and the other solenoid-operated linear actuators 20b, respectively. The vector arithmetic processor 23c fetches the first positional signal Sx and the second positional signal Sy , and determines a first component Fx and a second component Fy in cooperation with the data tables 23d. The set of first and second components Fx/Fy is successively determined for each of the two-dimensional actuators 20, and the first component Fx and the second component Fy are transferred to the two driving units 23e and 23f, respectively.

The first driving unit 23e includes a plurality of pwm driver 23g respectively associated with the two-dimensional actuators 20 and a demultiplexer 23h for distributing the first component Fx to the pwm drivers 23g. The second driving unit 23f also includes a plurality of pwm drivers 23j respectively associated with the two-dimensional actuators 20 and a demultiplexer 23k for distributing the second components Fy to the pwm drivers 23j. When the first positional signal Sx and the second positional signal Sy are supplied from a certain two-dimensional actuator 20, the vector arithmetic processor 23c and the data tables 23d determine the first component Fx and the second component Fy for the certain two-dimensional actuator 20, and the first component Fx and the second component Fy are supplied to the pwm drivers 23g and 23j for the certain two-dimensional actuator 20. The pwm drivers 23g and 23j regulates the driving, current Ic and the driving current Id to appropriate values corresponding to the components Fx and Fy , respectively, and the pwm drivers 23g and 23j supply the driving currents Ic and Id to the solenoid-operated actuators 20a/20b of the certain two-dimensional actuator 20.

Description is hereinbelow made on the behavior of the two-dimensional actuator labeled with "EX". The sensor elements detect the current position x of the plunger 20e and the current position y of the plunger 20f, respectively, and the sensor 22 supplies the first positional signal Sx and the second positional signal Sy to the multiplexers 23a and 23b, respectively. The multiplexers 23a and 23b assign a time slot to the first positional signal Sx and a corresponding time slot to the second positional signal Sy , and the vector arithmetic processor 23c fetches the first and second positional signals Sx and Sy . The vector arithmetic processor 23c determines the first component Fx on the basis of the first positional signal Sx and the second component Fy on the basis of the second positional signal Sy .

In detail, the vector arithmetic processor 23c carries out a coordinate transformation between the current positions x/y and coordinate (X,Y) of the pin 20g, and determines the first and second components Fx and Fy on an orthogonal coordinates. FIG. 10 illustrates the orthogonal coordinates, and pins 20c/20d are located at points P/Q. Points P/Q are on x -axis, and y -axis crosses x -axis at point P. Coordinates $(0,0)$ and $(L,0)$ are assigned to points P and Q, respectively. The coordinate (X,Y) of the pin 20g is calculated on the basis of the current positions x/y and the distance L between the points P and Q. The coordinate (X,Y) represents the current position of the pin 20g.

Subsequently, the vector arithmetic processor 23c respectively calculates current velocities X' and Y' on the basis of

the current position (X,Y) and the previous positions, and further calculates current accelerations X" and Y" on the basis of the current velocities X'/Y' and the previous velocities respectively. The current position X, the current velocity X' and the current acceleration X" determine a set of parameters for an equation of motion, and the current position Y, the current velocity Y' and the current acceleration Y" determine another set of parameters for an equation of motion. These sets of parameters are read out from the data tables 23d, and the vector arithmetic processor 23c calculates the first reaction component Fx and the second component Fy by using the sets of parameters. The vector arithmetic processor 23c supplies data signals representative of the first and second components Fx/Fy to the demultiplexers 23h/23k.

The sensors 22 generate sets of first/second positional signals Sx/Sy, and the multiplexers 23a/23b successively transfer the sets of first/second positional signals to the vector arithmetic processor 23c in a time sharing fashion. The vector arithmetic processor 23c successively determines sets of first/second components Fx/Fy as described hereinbefore, and supplies the sets of first/second components Fx/Fy to the demultiplexers 23h/23k in the time sharing fashion. The pwm drivers 23g are respectively paired with the pwm drivers 23j, and form pairs of pwm drivers 23g/23j. The demultiplexers 23h/23k distribute the sets of first/second components Fx/Fy to the pairs of pwm drivers 23g/23j, respectively, in such a manner that the two-dimensional actuators 20 exert the first/second components Fx/Fy to the associated moving objects 21, respectively. The pairs of pwm drivers 23g/23j regulates the amount of driving current Ic and the amount of driving current Id to appropriate values corresponding to the first/second components Fx/Fy. The pairs of pwm drivers 23g/23j supply the driving currents Ic/Id to the associated two-dimensional actuators 20, and the two-dimensional actuators 20 generate the sets of components Fx/Fy, respectively. The first and second components Fx/Fy compose the resultant force F, and the resultant force F is exerted on the moving object 21.

In this way, the inner force sense controller monitors the two-dimensional actuators 20, and provides the resultant forces F appropriate at each moment to the moving objects 21. Although only one set of vector arithmetic processor 23c and data tables 23d is incorporated in the inner force sense controller, the sets of positional signals Sx/Sy and the sets of data signals are supplied to and form the vector arithmetic processor 23c in the time sharing fashion. For this reason, the circuit configuration becomes simple.

The inner force sense controller described hereinbefore may determine the resultant force F depending upon the current position of the pin 20g, as similar to the slide switch shown in FIGS. 4A to 4C. In this instance, the current velocity X' and the current acceleration X" are zero in the equation of motion at all times. The current positions X and Y specify the position of the pin 20g, and the coordinate transformation is not required. The relation between the current positions X/Y and the first and second reaction components Fx/Fy is stored in the data tables 23d, and the processor 23c specifies the first and second reaction components Fx/Fy so as to read out them from the data tables 23d. The processor 23c supplies the data signals representative of the first/second reaction components Fx/Fy through the demultiplexers 23h/23k to the pair of pwm drivers 23g/23j associated with the two-dimensional actuator 20 locating the moving object 21 at coordinate (X, Y), and the pair of pwm drivers 23g/23j regulates the driving currents

Ic/Id to appropriate values corresponding to the reaction components Fx/Fy.

The inner force sense controller may determine the first and second reaction components Fx/Fy depending upon the position of the pin 20g and the direction of manipulating force exerted on the moving object 21 as similar to the button key shown in FIG. 6. In this instance, the vector arithmetic processor 23c carries out the coordinate transformation, and determines the coordinate (X, Y) of the pin 20g. Subsequently, the processor 23c calculates the current velocities X' and Y' on the basis of the current positions X/Y and the previous positions, and determines the directions of motion for the plungers 20e/20f. The first/second reaction components Fx/Fy are grouped by the directions of motion. The processor 23c firstly specifies a group of first reaction components corresponding to the direction of motion and a group of second reaction components corresponding to the direction of motion, and selects one of the first reaction components from the selected group and one of the second reaction components from the selected group. The selected first reaction component Fx and the selected second reaction component Fy are supplied through the demultiplexers 23h/23k to one of the pairs of pwm drivers 23g/23j. The pwm drivers 23g/23j regulates the driving currents Ic/Id to appropriate values corresponding to the first/second reaction components Fx/Fy.

Third Embodiment

Turning to FIG. 11 of the drawings, yet another inner force sense controller embodying the present invention largely comprises three-dimensional actuators 30 for driving movable objects 31, sensors 32 for producing three kinds of positional data information X, Y and Z and a controlling unit 33 responsive to the three kinds of positional data information X/Y/Z for controlling the three-dimensional actuators 30.

The three-dimensional actuator 30 is implemented by a combination of three solenoid-operated linear actuators 30a/30b/30c, and the three solenoid-operated linear actuators 30a/30b/30c are orthogonally arranged as shown in FIG. 12. The three solenoid-operated linear actuators 30a/30b/30c are respectively connected to universal joints 30d/30e/30f, and the universal joints 30d/30e/30f are respectively fixed to stationary members 30g/30h/30j. The solenoid-operated actuators 30a/30b/30c freely turn around points P/Q/R, respectively. Plungers 30k/30m/30n are projectable into and retractable into coils 30o/30p/30q, and the plungers 30k/30m/30n are turnably connected to a manipulator serving as the movable object 31 by means of a universal joint 30r. The controlling unit 33 independently supplies driving current Ie, If and Ig to coils 30o/30p/30q, and the solenoid-operated linear actuators 30a/30b/30c respectively project the plungers 30k/30m/30n, from the coils 30o/30p/30q depending upon the amount of driving current Ie/If/Ig. The components Fx/Fy/Fz are exerted on the universal joint 30r, and compose a resultant force F at point W. The current position x/y/z represents the distances from the point W to the points P/Q/R.

The sensor 32 has three sensor elements 32a/32b/32c, and the sensor elements 32a/32b/32c monitor the plungers 30k/30m/30n, respectively. The sensor element 32a generates a first positional signal Sx representative of the current position x of the plunger 30k, another sensor element 32b supplies a second positional signal Sy representative of the current position y of the plunger 30m, and yet another sensor element 32c generates a third positional signal Sz representative of the current position z of the plunger 30n.

The controlling unit 33 is similar to the controlling unit 23 and includes multiplexers 33a/33b/33c, a vector arithmetic

11

processor 33d, data tables 33e and three driving units 33f/33g/33h. The driving units 33f/33g/33h are identical in circuit arrangement to one another, and includes a demultiplexer 33j and pwm drivers 33k. The controlling unit 33 successively processes the sets of first/second/third positional signals $S_x/S_y/S_z$ so as to determine sets of the components F_x , F_y and F_z in a similar manner to the controlling unit 23. The controlling unit 33 regulates the driving currents $I_e/I_f/I_g$ to appropriate values corresponding to the components $F_x/F_y/F_z$. The driving currents are supplied to each of the three-dimensional actuators 30, and exerts the resultant force F to the associated manipulator or the moving, object 31.

Description is hereinbelow made on the behavior of the three-dimensional actuator labeled with "EX". The sensor elements 32a/32b/32c detect the current position x of the plunger 30a, the current position y of the plunger 30b and the current position z of the plunger 30c, respectively, and the sensor 32 supplies the positional signals $S_x/S_y/S_z$ to the multiplexers 33a, 33b and 33c, respectively. The multiplexers 33a, 33b and 33c respectively assign time slots to the positional signals $S_x/S_y/S_z$, and the vector arithmetic processor 33d fetches the positional signals S_x , S_y and S_z . The vector arithmetic processor 33d determines the components F_x , F_y and F_z on the basis of the positional signals S_x , S_y and S_z , respectively.

In detail, the vector arithmetic processor 33d carries out a coordinate transformation between the current positions $x/y/z$ and coordinate (X,Y,Z) of the point W , and X -axis, Y -axis and Z -axis after the transformation define coordinates used in an equation of motion.

Subsequently, the vector arithmetic processor 33d respectively calculates current velocities X' , Y' and Z' on the basis of the current position (X,Y,Z) and the previous position, and further calculates current accelerations X'' , Y'' and Z'' on the basis of the current velocities $X'/Y'/Z'$ and the previous velocities, respectively. The current position X , the current velocity X' and the current acceleration X'' determine a set of parameters for an equation of motion in the direction of X -axis. Similarly, the current position Y , the current velocity Y' and the current acceleration Y'' determine another set of parameters for an equation of motion in the direction of Y -axis, and the current position Z , the current velocity Z' and the current acceleration Z'' determine yet another set of parameters for an equation of motion in the direction of Z -axis. These sets of parameters are read out from the data tables 33e, and the vector arithmetic processor 33d calculates the components F_x , F_y and F_z by using the sets of parameters. The vector arithmetic processor 33d supplies data signals representative of the components $F_x/F_y/F_z$ to the demultiplexers 33j of the driving units 33f/33g/33h, respectively, and the demultiplexers 33j transfer the components $F_x/F_y/F_z$ to the pwm drivers 33k associated with the three-dimensional actuator "EX". The pwm drivers 33k regulates the driving currents $I_e/I_f/I_g$ to appropriate values corresponding to the components $F_x/F_y/F_z$, and supply the driving currents $I_e/I_f/I_g$ to the three-dimensional actuator "EX".

The sensors 22 generate sets of positional signals $S_x/S_y/S_z$, and the multiplexers 33a/33b/33c successively transfer the sets of positional signals $S_x/S_y/S_z$ to the vector arithmetic processor 33d in a time sharing fashion. The vector arithmetic processor 33d successively determines sets of components $F_x/F_y/F_z$ as described hereinbefore, and supplies the sets of components $F_x/F_y/F_z$ to the demultiplexers 33j of the driving units 33f/33g/33h in the time sharing fashion. Three pwm drivers 33k form sets of pwm drivers

12

33k, and the demultiplexers 33j distribute the data signals representative of the sets of components $F_x/F_y/F_z$ to the sets of pwm drivers 33k, respectively, in such a manner that the associated three-dimensional actuators 32 exert the sets of components $F_x/F_y/F_z$ on the associated moving objects 31, respectively. The sets of pwm drivers 33k regulate the amounts of driving currents $I_e/I_f/I_g$ to appropriate values corresponding to the given components $F_x/F_y/F_z$. The sets of pwm drivers 33k supply the driving currents $I_e/I_f/I_g$ to the associated three-dimensional actuators 30, and the three-dimensional actuators 30 generate the sets of components $F_x/F_y/F_z$, respectively. The components $F_x/F_y/F_z$ compose a resultant force F , and the resultant force F is exerted on the moving object 31.

In this way, the inner force sense controller monitors the three-dimensional actuators 30, and provides the resultant forces F appropriate at each moment to the three-dimensional motions of the object 31. Although only one set of vector arithmetic processor 33d and data tables 33e is incorporated in the inner force sense controller, the sets of positional signals $S_x/S_y/S_z$ and the sets of data signals are supplied to and form the vector arithmetic processor 33d in the time sharing, fashion. For this reason, the circuit configuration becomes simple.

The moving object 31 or the manipulator may have the moving object 31 at a neutral position when the solenoid-operated linear actuators 30a/30b/30c project the plungers 30k/30m/30n by half of each stroke. The three-dimensional actuator 30 venerates the reaction force F or resistance to the three-dimensional motion of the moving object 31, and the reaction force F is increased together with the distance from the neutral position. The reaction force F is only dependent on the distance from the neutral position, and the velocity and the acceleration are zero in the equation of motion at all times. The coordinate transformation is not required, and the data tables 33e store the relation between the reaction components $F_x/F_y/F_z$ and the current positions $x/y/z$, and the processor 33d simply reads out a set of reaction components $F_x/F_y/F_z$ corresponding to the current positions $x/y/z$ from the data tables 33e. The processor 33d supplies the data signals representative of the reaction components $F_x/F_y/F_z$ through the demultiplexers 33j to the pwm drivers 33k, and the pwm drivers regulates the driving currents $I_e/I_f/I_g$ to appropriate values for producing the reaction components $F_x/F_y/F_z$. The driving current is supplied to the three-dimensional actuator 30, and the three-dimensional actuator 30 exerts the resultant force F on the moving object 31.

The inner force sense controller may determines the components $F_x/F_y/F_z$ depending upon the position of the moving object 31 and the direction of manipulating force exerted on the moving object 31 as similar to the button key shown in FIG. 6. In this instance, the vector arithmetic processor 33d carries out the coordinate transformation, and determines the coordinate (X,Y,Z) of the point W . Subsequently, the processor 33d calculates the current velocities X' , Y' and Z' on the basis of the current positions $X/Y/Z$ and the previous positions, and determines the directions of motion for the plungers 30k/30m/30n. The components $F_x/F_y/F_z$ are grouped by the direction of motion in the data tables 33e. The processor 33d firstly specifies a group of components F_x for the plunger 30k moved in the given direction, a group of components F_y for the plunger 30m moved in the given direction and a group of components F_z for the plunger 30n moved in the given direction, and selects one of the components F_x from the selected group, one of the components F_y from the selected group and one of the

components Fz from the selected group. The selected components Fx/Fy/Fz are supplied through the demultiplexers 33j to the pwm drivers 33k, and the pwm drivers 33k regulate the driving currents Ie/I_f/I_g to appropriate values for generating, the components Fx/Fy/Fz.

Fourth Embodiment

FIG. 13 illustrates still another inner force sense controller embodying the present invention, and the inner force sense controller is equipped with the linear actuators 1, the two-dimensional actuators 20 and the three-dimensional actuators 30. The linear actuators 1 are respectively connected to linearly moving objects (not shown), the two-dimensional actuators 20 are respectively connected to two-dimensionally moving objects (not shown), and the three-dimensional actuators 30 are respectively connected to three-dimensionally moving objects (not shown). The sensors 1d, 22 and 32 are associated with the actuators 1/20/30, and monitor the plungers so as to produce the analog positional signals S_x, S_x/S_y. The analog positional signals S_x, S_y and S_z are representative of the strokes of the plungers of the solenoid-operated actuators. If the analog positional signal S_x is supplied from the linear actuator 1, the analog positional signals S_y and S_z are assumed to be zero. Similarly, the analog positional signal S_z from the two-dimensional actuator is assumed to be zero.

The inner force sense controller further comprises a controlling unit 40 integrated on a semiconductor chip. Although the controlling unit 40 includes three controlling sub-units 40a, 40b and 40c respectively processing the analog positional signals S_x, S_y and S_z, only one controlling, sub-unit 40a for the analog positional signal S_x is shown and described hereinbelow. The other controlling sub-units 40b and 40c are analogous in arrangement and behavior to the controlling, sub-unit 40a.

The controlling sub-unit 40a includes multiplexers 41a, 41b and 41c and two groups of differentiators 42a and 42b. The multiplexer 41a is connected through signal lines assigned to the analog positional signals S_x to the sensors 1d/22/32, and periodically provides a signal path to the analog positional signals S_x. In other words, the multiplexer 41a assigns time slots to the analog positional signals S_x, respectively, and serially outputs the analog positional signals S_x.

The differentiators 42a are equal in number to the actuators 1d/22/32, and are also connected through the signal lines for the analog positional signals S_x to the sensors 1d/22/32. The differentiators 42a differentiates the current positions X, and respectively produce analog velocity signals S_x' each representative of the current velocity. The differentiators 42a supply the analog velocity signals S_x' to the multiplexer 41b and the other group of differentiators 42b. The multiplexers 41b also periodically provide a signal path to the analog velocity signals S_x'. Thus, the multiplexer 41b assigns time slots to the analog velocity signals S_x', respectively, and serially outputs the analog velocity signals S_x' therefrom.

The differentiators 42b are equal in number to the differentiators 42a, and differentiate the analog velocity signals S_x' so as to determine current accelerations.

The differentiators 42b respectively produce analog acceleration signals S_x" representative of the current accelerations, and supply them to the multiplexers 41c. The multiplexer 41c periodically supplies a signal path to the analog acceleration signals S_x", and serially outputs the analog acceleration signals S_x" therefrom.

The controlling sub-unit 40a further includes analog-to-digital converters 43a, 43b and 43c connected in parallel to

the multiplexers 41a, 41b and 41c, respectively, and the. The analog-to-digital converters 41a, 41b and 41c convert the analog positional signal S_x, the analog velocity signal S_x' and the analog acceleration signal S_x" to a digital positional signal DSX, a digital velocity signal DSX' and a digital acceleration signal DSX", respectively.

The controlling sub-unit 40a further includes coordinate transforming tables 44a, 44b and 44c, and the coordinate transforming tables 44a, 44b and 44c carry out a coordinate transformation on the digital positional signal S_x, the digital velocity signal S_x' and the digital acceleration signal S_x". A digital positional signal DSX, a digital velocity signal DSX' and a digital acceleration signal DSX" are output from the coordinate transforming tables 44a, 44b and 44c.

The controlling sub-unit 40a further includes a pair of data tables 45a/45b for storing first component data codes DF1/DF1' each representative of a first component force F1, a data table 45c for storing second component data codes DF2 each representative of a second component force F2 and a data table 45d for storing third component data codes DF3 each representative of a third component force DF3. The first component data codes DF1 stored in the data table 45a are available for controlling the objects moved in one direction such as a projecting direction, and the first component data codes stored DF1' in the other data table 45b are used for controlling the objects moved in the opposite direction or a retracting direction. The first component data codes DF1/DF1' in each data table 45a/45b are grouped by the velocity, and the first component data codes DF1/DF1' for a certain velocity form a data sub-table.

Similarly, the second component data codes DF2 are grouped by the position so as to form data sub-tables selective by using the digital positional signal DSX, and the third component data codes DF3 are also Grouped by the position so as to form data sub-tables selective by using the digital positional signal DSX. For this reason, the digital positional signal DSX and the digital velocity signal DSX' are supplied to the data table 45c, and the digital positional signal DSX and the digital acceleration signal DSX" are supplied to the data table 45d.

The controlling sub-unit 40a further includes a selector 46 connected between the coordinate transforming table 44a and the pair of data tables 45a/45b. The selector 46 is responsive to the digital velocity signal DSX' for steering the digital positional signal DSX to one of the data tables 45a/45b. The digital velocity signal DSX' has a sign bit representative of a positive value or a negative value, and the positive sign bit and the negative sign bit are corresponding to the projection of the plunger and the retraction of the plunger, respectively. For this reason, the selector 46 is responsive to the sign bit for steering the digital positional signal DSX to either data table 45a or 45b. When the digital positional signal DSX is not supplied to the data table 45a/45b, the data table 45a/45b outputs the first component data code DF1/DF1' of zero.

The digital velocity signal DSX' is further supplied to the pair of data tables 45a/45b. One of the data sub-tables is selected from one of the data tables 45a/45b, and the digital positional signal DSX selects one of the first component data codes from, the selected data sub-table.

The controlling sub-unit 40a further includes a central processing unit 47, and the central processing unit 47 periodically increments internal timer for measuring lapse of time from the initiation of operation. The digital positional signal DSX, the digital velocity signal DSX' and the digital acceleration signal DSX" are supplied to the central processing unit 47, and the central processing unit 47 takes the

lapse of time and the current position/current velocity/current acceleration into account so as to output a fourth component data code DF4 representative of a fourth component force F4.

The controlling sub-unit 40a further includes a multiplexer 48a connected to an external signal source such as a volume controller (not shown), an analog-to-digital converter 48b connected to the multiplexer 48a and a data table 48c connected to the analog-to-digital converter 48b. External analog signals Sext are supplied in parallel to the multiplexer 48a, and are, by way of example, representative of basic component forces exerted on the respective objects. The multiplexer 48a assigns time slots to the external analog signals Sext, respectively, and the external analog signals Sext are serially supplied to the analog-to-digital converter 48b. The analog-to-digital converter 48b converts the external analog signals Sext to digital signals Dext, and the digital signals Dext are supplied to the data table 48c. The digital signal Dext specifies one of the fifth component data codes DF5, and the selected fifth component data code DF5 is read out from the data table 48c. The fifth component data code DF5 is representative of the basic component force, and user can modifies the force F exerted on each moving object by changing the fifth component force F5. The external analog signal flay represent a piece of warning information or a piece of trigger information. For example, when a trouble takes place, the external signal source makes the moving object heavy so as to inform the manipulator of the trouble.

The controlling sub-unit 40a further includes adders 49a, 49b, 49c, 49d and 49e arranged in series, and the first to fifth component data codes DF1 to DF5 are selectively supplied to the adders 49a to 49e. The first to fifth component data codes are added to one another, and the adder 49e outputs a digital target force signal DFt.

The controlling sub-unit 40a further includes a modification table 50, a demultiplexer 51, pwm drivers 52 and current feedback circuits 53. A solenoid-operated actuator differently varies the thrust of the plunger between the projection of the plunger and the retraction thereof. In other words, the solenoid-operated actuator changes the thrust along a hysteresis loop. This means that the amount of driving current should be modified between the projection and the retraction. Moreover, the thrust generating characteristics are different between different models of solenoid-operated actuators. The modification table 50 changes the target force Ft to a modified target force Fm appropriate to the actuator 1/20/30 with the plunger at the current position on one of the projection and the retraction. The modification table 51 has a plurality of sub-tables assigned to positions along the trajectory of the plunger and one of the sub-tables is selected by using the digital positional signal DSX. The digital target force signal DFt specifies a digital modified force signal DFm in the selected sub-table, and the digital modified force signal DFm is supplied to the demultiplexer 51. In this way, the digital modified force signals DFm for the actuators 1/20/30 are successively supplied from the modification table 50 to the demultiplexer 51, and the demultiplexer 51 distributes the digital modified force signals DFm to the pwm drivers 52 respectively associated with the actuators 1/20/30. The pwm driver 52 regulates driving current Ix to appropriate value equivalent to the modified target force Fm, and the current feedback circuit 53 supplies the driving current Ix to one of the actuators 1/20/30 to be controlled. The current feedback circuit 53 constantly supplies the driving current Ix regardless of the temperature rise of the coil.

Assuming now that the linear actuator 1, the two-dimensional actuator 20 and the three-dimensional actuator 30 concurrently drive the associated moving objects. The sensors 1d/22/32 monitor the associated actuators 1/20/30, and produce the analog positional signal Sx and the analog positional signals Sx/Sy and Sx/Sy/Sz. The analog positional signal Sy or signals Sy/Sz are processed as similar to the analog positional signal Sx, and, for this reason, description is forced on the analog positional signals Sx, only.

The analog positional signals Sx are supplied in parallel from the sensors 1d/22/32 to the multiplexer 41a and the differentiators 42a. The differentiators 42a differentiate the analog positional signals Sx, and supply the analog velocity signals Sx' representative of the current velocities to the multiplexer 41b and the differentiators 42b. The differentiators 42b calculate the current accelerations, and supply the analog acceleration signals Sx" to the multiplexer 41c.

The multiplexer 41a successively supplies the analog positional signals Sx to the analog-to-digital converter 43a, and the analog-to-digital converter 43a converts the analog positional signals Sx to the digital positional signals DSx. Similarly, the multiplexer 41b successively supplies the analog velocity signals Sx' to the analog-to-digital converter 43b, and the analog-to-digital converter 43b converts the analog velocity signals Sx' to the digital signal signals DSx'. The multiplexer 41c also successively supplies the analog acceleration signals Sx" to the analog-to-digital converter 43c, and the analog-to-digital converter 43c converts the analog acceleration signals Sx" to the digital acceleration signals DSx". One of the analog positional signals Sx is assigned to a certain time slot, and the analog velocity signal Sx' and the analog acceleration signal Sx" are respectively assigned to time slots synchronism with the certain time slot. For this reason, the analog positional signal Sx, the analog velocity signal Sx' and the analog acceleration signal Sx" for a certain actuator are simultaneously processed.

The digital positional signal DSx, the digital velocity signal DSx' and the digital acceleration signal DSx" are supplied to the coordinate transforming tables 44a, 44b and 44c, respectively, and are converted to the digital positional signal DSX, the digital velocity signal DSX' and the digital acceleration signal DSX", respectively. The coordinate transforming tables 44a to 44c require the other current positions y/z for the coordinate transformation, and the current positions y and z are supplied from the other controlling Sub-units 40b and 40c. If the digital positional signal DSx is representative of the current position x of the linear actuator 1, the other current positions y and z are assumed to be zero. Similarly, if the digital positional signal DSx is representative of the current position x of the two-dimensional actuator 20, the current position y is assumed to be zero.

The external analog signals Sext are also supplied to the multiplexer 48a, and the multiplexer 48a assigns time slots to the external analog signals Sext, respectively. The external analog signal Sext for a certain actuator 1/20/30 is assigned to the time slot synchronism with the time slots assigned the analog positional signal Sx, the analog velocity signal Sx' and the analog acceleration signal Sx" for the certain actuator 1/20/30. The analog-to-digital converter 48b converts the external analog signals Sext to the digital signals Dext, if any. The digital signals Dext are supplied to the data table 48c, and the fifth component data code DF5 is supplied to the adder 49e.

The digital positional signal DSX, the digital velocity, signal DSX' and the digital acceleration signal DSX" are supplied to the central processing unit 47, and the central

processing unit 47 checks the internal timer to see how long it has been from the initiation of the controlling operation. The central processing unit 47 determines the fourth component force F4, and outputs the fourth component data code DF4. The fourth component data code DF4 is supplied to the adder 49d.

The digital velocity signal DSX' is supplied to the selector 46, and the selector 46 steers the digital positional signal DSX to one of the data tables 45a/45b. For this reason, the digital positional signal DSX, the digital velocity signal DSX' and the digital acceleration signal DSX'' are concurrently supplied to the data tables 45a/45b, 45c and 45d, respectively. The first component data code DF1/DF1', the second component data code DF2 and the third component data code DF3 are read out from the data tables 45a/45b, 45c and 45d, and are supplied to the adders 49a to 49c.

The adders 49 to 49e sequentially add the first to fifth component data codes DF1 to DF5, and determine the total target force Ft as follows.

$$F_t = MX'' + \rho X' + \kappa X + f_1 + f_2 \quad \text{equation 1}$$

where κX is given by the first component data code DF1/DF1' determined by the selector 46, the data tables 45a/45b and the adder 49a, $\rho X'$ is given by the second component data code DF2 read out from the data table 45c and MX'' is given by the third component data code DF3 read out from the data table 45d. The digital velocity signal DSX' and the digital positional signal DSX specify the second component data code DF2. $\rho X'$ is representative of a parameter due to a viscosity coefficient. If the linear actuator 1 is associated with the button switch shown in FIG. 6, the value of $\rho X'$ is gradually increased together with the distance from the neutral position, and, accordingly, the second component force F2 due to the viscous load is gradually increased together with the distance. MX'' is given by the third component data code DF3, and is determined by using the current position and the current acceleration. The third component force F3 is caused by an inertial load.

The adder 49e sequentially supplies the digital target force signals DFt to the modification table 50. One of the sub-tables is selected from the modification table 50 for each of the digital target force signals DFt, and is assigned to the current position of the actuator to be controlled with the target force Ft. Each of the digital target force signals DFt specifies one of the modified forces Fm in the selected sub-table, and the selected sub-table outputs the digital modified force signal DFm. Thus, the digital modified force signals DFm are successively output from the modification table 50, and are supplied to the demultiplexer 51.

The demultiplexer 51 distributes the digital modified force signals DFm to the pwm drivers 52 associated with the actuators 1/20/30, and the associated current feedback circuits 53 supply the driving currents Ix to the actuators 1/20/30, and the actuators 1/20/30 exert the modified forces Fm on the associated moving objects, respectively.

The inner force sense controller shown in FIG. 13 takes various force components F2, F3, F4 and F5 into account, and gives appropriate inner force sense to the operator of the moving objects. Moreover, the inner force sense controller is integrated on a single semiconductor chip, and the single semiconductor chip is installed in any kind of virtual reality system.

Fifth Embodiment

FIG. 14 illustrates another inner force sense controller embodying the present invention. The inner force sense controller implementing the fourth embodiment converts the current position x, y, z representative of the distances to

coordinate (X,Y,Z) of the moving object through the coordinate transformation. The inner force sense controller implementing the fifth embodiment directly determines target force to be exerted on a moving object from the current position x, y, z by using data tables.

The inner force sense controller implementing the fifth embodiment largely comprises the three kinds of actuator i.e., the linear actuators 1, the two-dimensional actuators 20 and the three-dimensional actuators 30, the sensors 1d, 22 and 32 associated with these actuators 1, 20 and 30 and a controlling unit 50 connected between the sensors 1d, 22 and 32 and the actuators 1, 20 and 30. The controlling unit 50 is integrated on a single semiconductor chip, and three controlling sub-units 50a, 50b and 50c form the controlling unit 50. The three controlling sub-units 50a, 50b and 50c respectively control forces in the three directions of an orthogonal set, and the three directions are aligned with the center axes of the plungers 30k/30m/30n of the solenoid-operated actuators 30a, 30b and 30c. If the current position x represents the stroke of the plunger 1c of the linear actuator 1, only one axis is aligned with the centerline of the plunger 1c. Similarly, two axes are aligned with the center lines of the plungers 20e/20f of the solenoid-operated actuators 20a/20b.

The three controlling sub-units 50a, 50b and 50c are similar in circuit arrangement to one another, and description is made on the controlling sub-unit 50a only. The controlling sub-unit 50a includes three-dimensional data tables 51a/51b/51c/51d, parameter correction tables 51e/51f and multiplication tables 51g/51h instead of the coordinate transforming tables 44a to 44c and the data tables 45a to 45d. Each of the three-dimensional tables 51a to 51d consists of a plurality of two-dimensional tables. One of the two-dimensional tables is selected, and a component force data code is specified in the selected two-dimensional table. The other circuit components are similar to those of the controlling sub-unit 40a, and are labeled with the references designating the corresponding circuit components of the fourth embodiment.

The sensors 1d, 22 and 32 respectively monitors the plungers 1c/20e/30a of the actuators 1/20/30, and supply the analog positional signals Sx in parallel to the multiplexer 41a and the group of differentiators 42a. The differentiators 42a differentiate the current positions x, and determine the current velocities x'. The differentiators 42a supply the analog velocity signals Sx' to the multiplexers 41b and the group of differentiators 42b. The differentiators 42b calculate the current accelerations x'', and supply the analog acceleration signals Sx'' to the multiplexer 43c.

The multiplexer 41a assign time slots to the analog positional signals Sx, and serially supplies the analog positional signals Sx to the analog-to-digital converter 43a. Similarly, the multiplexer 41b assign time slots to the analog velocity signals Sx', and serially supplies the analog velocity signals Sx' to the analog-to-digital converter 43b. The multiplexer 41c also assign time slots to the analog acceleration signals Sx'', and serially supplies the analog acceleration signals Sx'' to the analog-to-digital converter 43c. The time assigned to a certain analog positional signal Sx is synchronism With the time slots respectively assigned to the analog velocity signal Sx' and the analog acceleration signal Sx'' calculated from the certain analog positional signal Sx.

The multiplexer 48a also assign time slots to the external analog signals Sext, and the time slots are synchronism with the time slots for the analog positional signals Sx, respectively. The multiplexer 48a serially supplies the external analog signals Sext to the analog-to-digital converter 48b.

The analog-to-digital converters **43a**, **43b**, **43c** and **48b** converts the analog positional signal S_x , the analog velocity signal S_x' , the analog acceleration signal S_x'' and the analog external signal S_{ext} to the digital positional signal DS_x , the digital velocity signal DS_x' , the digital acceleration signal DS_x'' and the digital external signal DS_{xext} , respectively.

Target force F_t is given by the following equation of motion.

$$F_t = Mx'' + \rho x' + \kappa x + f_1 + f_2$$

equation 2

The term κx is determined by the three-dimensional tables **51a/51b** and the parameter correction table **51e/51f**, the three-dimensional table **51c** and the multiplication table **51g** determine the term $\rho x'$, and the term Mx'' is given by the three-dimensional table **51d** and the multiplication table **51h**.

In detail, the digital positional signals DS_x , DS_y and DS_z are supplied to the three-dimensional table **51a**, and the current positions x , y and z specify a preliminary component data code $kx1$. The selector **46** steers the digital positional signal DS_x to one of the three-dimensional tables **51a** and **51b** depending upon the sign bit of the digital velocity signal DS_x' as similar to the fourth embodiment. The preliminary component data code $kx1$ is read out from the three-dimensional table **51a** or **51b**, and is supplied to the parameter correction table **51e** or **51f**. Each of the parameter correction tables **51e** and **51f** is divided into parameter correction sub-tables, and the digital acceleration signal DS_x'' selects one of the parameter correction sub-tables. The preliminary component data code $kx1$ is supplied to the selected parameter correction sub-table, and a first component data code $DF1$ is read out from the parameter correction sub-table. The first component data code $DF1$ is representative of a first component force $F1$ correspondingly to kx . Thus, the preliminary correction data code is modified to the first component data code $DF1$, and, for this reason, deformation of the moving object due to the acceleration is taken into account.

The first component data code $DF1$ is transferred to the adder **49a**. The parameter correction table **51f** or **51e** associated with non-selected three-dimensional table **51b/51a** outputs the first component data code $DF1$ of zero, and the adder **49a** passes the first component data code $DF1$ read out from the selected one to the next adder **49b**. The current positions x , y , z , the current velocity x' and the current acceleration x'' are taken into account for the first component force $F1$ or kx .

In order to determine a second component force $F2$ corresponding, to $\rho x'$, the digital positional signals DS_y and DS_z are supplied to the three-dimensional table **51c**, and select one of the two-dimensional tables from the three-dimensional table **51c**. The two-dimensional tables define the relation between current position x and the parameter ρ , and the digital positional signal DS_x specifies a value of parameter ρ from the selected two-dimensional table. The value of parameter ρ is supplied to the multiplication table **51g**, and selects one of the two-dimensional multiplication sub-tables. The two-dimensional multiplication sub-tables define the relation between the current velocity x' and the second component force $F2$ or $\rho x'$. When the digital velocity signal DS_x' is supplied to the selected two-dimensional multiplication sub-table, a second component data code $DF2$ representative of the second component force $F2$ or $\rho x'$ is read out from the three-dimensional multiplication table **51g** to the adder **49b**, and the second component force $F2$ is added to the first component force $F1$. The current position x , y and z are taken into account for the second component

force $F2$ or $\rho x'$. The parameter ρ selects one of the two-dimensional multiplication tables and the second force $F2$ may be weighted by the parameter ρ .

In order to determine a third component force corresponding to Mx'' , the digital positional signals DS_y and DS_z are supplied to the three-dimensional table **51d**, and select one of the two-dimensional tables from the three-dimensional table **51d**. The two-dimensional tables define the relation between current position x and the parameter M , and the digital positional signal DS_x specifies a value of parameter M from the selected two-dimensional table. The value of parameter M is supplied to the multiplication table **51h**, and selects one of the two-dimensional multiplication sub-tables. The two-dimensional multiplication sub-tables define the relation between the current acceleration x'' and the third component force $F3$ or Mx'' . When the digital acceleration signal DS_x'' is supplied to the selected two-dimensional multiplication sub-table, a third component data code $DF3$ representative of the third component force $F3$ or Mx'' is read out from the three-dimensional multiplication table **51h** to the adder **49c**, and the third component force $F3$ is added to the first and second component forces $F1$ and $F2$. The current positions x , y and z are taken into account for the third component force $F2$ or Mx'' . The parameter M selects one of the two-dimensional multiplication tables, and the third force $F3$ may be weighted by the parameter M .

The fourth and fifth component forces $F4$ and $F5$ are produced as similar to those of the fourth embodiment, and are supplied to the adders **49d** and **49e**. The fourth component force $F4$ is added to the first to third component forces $F1$ to $F3$, and the fifth component force $F5$ is added to the first to fourth component forces $F1$ to $F4$. The adder **49e** outputs the digital target force signal DF_t representative of the target force F_t , and is supplied to the modification table **50**. The function of the modification table **50**, and the regulation of the driving current signal I_x is analogous to those of the fourth embodiment.

The adder **49e** sequentially supplies the digital target force signals DF_t to the modification table **50**. One of the sub-tables is selected from the modification table **50** for each of the digital target force signals DF_t , and is assigned to the current position of the actuator to be controlled with the target force F_t . Each of the digital target force signals DF_t specifies one of the modified forces F_m in the selected sub-table, and the selected sub-table outputs the digital modified force signal DF_m . Thus, the digital modified force signals DF_m are successively output from the modification table **50**, and are supplied to the demultiplexer **51**.

The demultiplexer **51** distributes the digital modified force signals DF_m to the pwm drivers **52** associated with the actuators **1/20/30**, and the associated current feedback circuits **53** supply the driving currents I_x to the actuators **1/20/30**, and the actuators **1/20/30** exert the modified forces F_m on the associated moving objects, respectively.

No coordinate transformation table is incorporated in the inner force sense controller implementing the fifth embodiment, and the fifth embodiment accelerates the controlling operation rather than the third and fourth embodiments.

Subsequently, description is made on the three-dimensional tables **51a** to **51d**, the parameter correction tables **51e** and **51f** and the multiplication tables **51g** and **51h**. In the following description, only one three-dimensional actuator **30** is controlled by the controlling unit **50**.

Assuming now that the three-dimensional actuator **30** is tracing a human face FA , the solenoid-operated linear actuators **30a**, **30b** and **30c** exert the forces F_x , F_y and F_z on the

universal joint **30r**, and tie resulting force F_t is balanced with the reaction from the human face **FA**. The sensor elements **32a**, **32b** and **32c** monitor the plungers **30k/30m/30n**, and produce the analog positional signals S_x , S_y and S_z representative of the strokes of the plungers **30k/30m/30n**, respectively. The center lines of the plungers **30k/30m/30n** are aligned with the three axes of an orthogonal set, and the current position x , y and z represent coordinates (x , y , z) of the point **W**. In this situation, the current positions, the current velocities and the current accelerations determine the forces F_x , F_y and F_z . When an analyst measures the forces F_x , F_y and F_z , he determines the relations stored in the three-dimensional tables **51a/51b**, **51c** and **51d**, the parameter correction tables **51e/51f** and the multiplication tables **51g/51h** on the basis of the forces F_x , F_y and F_z .

When the universal joint **30r** is simply pressed against the human face **FA**, the current velocities and the current accelerations are zero, and the first component force F_1 or kx is proportional to the amounts of electric power respectively supplied to the solenoid-operated linear actuators **30a/30b/30c** or the forces F_x , F_y and F_z . The analyst measures the amounts of electric power over the human face **FA**, and the relations between the current positions $x/y/z$ and the forces $F_x/F_y/F_z$ are stored in the three-dimensional tables **51a** to **51d**.

The three-dimensional data table **51c** and the multiplication table **51g** are determined through the measurement of the amounts of electric power by changing the velocity of the universal point **30r**, and the three-dimensional data table **51d** and the multiplication table **51h** are also determined through the measurement of the amounts of electric power under different accelerations. In the actual measurement, the analyst keeps the directions of the forces F_y/F_z constants and measures the amounts of electric power by changing the force F_x . Subsequently, the amounts of electric power are measured for each of the forces F_y and F_z in a similar manner to the force F_x . When the universal point **30r** is pressed against a fragile article, a limiter is provided in the controlling unit so that the resulting force F_t does not exceed a dangerous level.

Using the three-dimensional data tables **51a** to **51d**, the parameter correction tables **51e/51f** and the multiplication tables **51g/51h**, the three-dimensional actuator **30** gives an inner force sense to an operator as if he traces the human face **FA**. He feels the manipulator **31** to be resilient.

As will be understood from the foregoing description, the inner force sense controller implementing the fifth embodiment determines the target forces without a coordinate transformation, and the processing speed is enhanced. The inner force sense controller is applicable to a tool taking the resiliency into consideration or an apparatus to determine the three-dimensional profile or to decide a three-dimensional boundary.

Application

In the first to fifth embodiment, the program sequence may be stored in a memory associated with the central processing unit, supplied through a portable memory such as a CD-ROM disk or through an information communicating line. FIG. 16 illustrates a driving simulator equipped with the inner force sense controller implementing the fourth embodiment.

The driving simulator comprises the inner force sense controller and a personal computer **61** connected to an information communicating network **62**, and a server **63** supplies a controlling program through the information communicating network **62** to the personal computer **61**. The controlling program makes the personal computer **61**

control the inner force sense controller and the other equipment described hereinbelow, and contains pieces of touch data information or the parameters of the motion of equation. The controlling unit **40** is integrated on a semiconductor chip, and is connected to the personal computer **61**.

The driving simulator further comprises a steering, wheel **63**, a clutch pedal **64**, an accel pedal **65**, a braking pedal (not shown) and a shift lever **66** and so forth. When a driver manipulates these components **63** to **66**, the inner force sense controller **40** gives variable reaction forces to these components. If the pieces of touch data information is modified, the driver feels the components **63** to **66** different.

The driving simulator further comprises an image display **67** placed in front of a driver's seat **68** and a speaker system **69**. The personal computer **61** produces a moving picture on the screen of the intake display **67**, and makes the speaker system **69** to sound. A driver sittings on the driver's seat experiences a virtual environment through the image display **67** and the speaker system **69**.

FIG. 16 illustrates the arrangement of the personal computer **61**. A central processing unit **61a**, a read only memory device **61b**, a random access memory device **61c**, a hard disk unit **61d**, a communication interface **61e**, a CD-ROM driver **61f** and an input/output interface **61g** are connected to a bus system **61h**, and the central processing unit **61a** communicates with the other components **61b** to **61g** through the bus system **61h**. When the server **63** supplies the controlling program through the information communicating network **62**, the personal computer **60** receives the controlling program at the communication interface **61e**, and transfers the controlling program through the bus system **61h** to the hard disk unit **61d**. The controlling program is written into the hard disk unit **61d**. If the controlling program is stored in a CD-ROM disk (not shown), the CD-ROM disk is inserted into the CD-ROM driver **61f**, and the controlling program is transferred to the hard disk unit **61d** so that the hard disk unit **61d** stores the controlling program. The central processing unit **61a** carries out the data transfer and the writing operation in accordance with the program codes stored in the read only memory device **61d**, and the random access memory device provides a working area during the execution of the controlling program.

Linear actuators **70a**, **70b** and **70c** are provided for the steering wheel **63**, the clutch pedal **64**, the braking pedal and the accel pedal **65**, respectively, and a two-dimensional activator **71** is held in contact with the shift lever **66**. The linear actuators **70a**, **70b** and **70c** are accompanied with sensors **70d**, **70e** and **70f**, respectively, and the sensors **70d** to **70f** respectively produce analog positional signals S_{x1} , S_{x2} and S_{x3} . The analog positional signals **70d** to **70f** are representative of current positions of the movable elements of the linear actuators **70a** to **70c** and, accordingly, the current position of the steering wheel **63**, the current position of the clutch pedal **64**, the current position of the braking pedal and the current position of the accel pedal, respectively, and are supplied to the controlling unit **40**. Two linear actuators **71a/71b** form in combination the two-dimensional actuators **71**, and sensors **71c/71d** monitor the linear actuators **71a/71b** so as to produce analog positional signals S_{x4} and S_y representative of current positions of the movable elements of the linear actuators **71a/71b**. The analog positional signals S_{x4} and S_y are also supplied to the controlling unit **40**.

A three-dimensional actuator **72** is provided for the driver's seat **68**, and linear actuators **72a**, **72b** and **72c** form in combination the three-dimensional actuator **72** in a similar manner to the three-dimensional actuator **30**. The three-

dimensional actuator **72** three-dimensionally moves the driver's seat, and changes driver's attitude. In detail, the personal computer **61** is connected to a vector decomposer **73**, and supplies a driving signal representative of a resulting force **F** to the vector decomposer **73**. The vector decomposer **73** produces driving current signals **DR1**, **DR2** and **DR3** from the driving signal, and supplies the driving current signals **DR1/DR2/DR3** to the linear activators **72a**, **72b** and **72c**. The driving current signals **DR1**, **DR2** and **DR3** cause the linear actuators **72a/72b/72c** to exert component forces to the driver's seat, and the driver experiences acceleration and deceleration as if he actually drives a vehicle. For example, when the driver presses down the accel pedal, the three-dimensional actuator **72** exerts the force on the seat, and the driver experiences the acceleration. Moreover, when the driver brings the vehicle into collision with an obstacle, the three-dimensional actuator **72** violently shakes the driver's seat, and makes the driver experience the shock.

The controlling unit **40** is connected to the personal computer **61**, and informs the personal computer **61** of the current positions of the steering wheel/clutch pedal/braking pedal/accel pedal/shift lever **63/64/65/66**. The personal computer **61** analyzes the current positions, and controls the moving picture and the sounds. While the central processing unit is sequentially executing the controlling program, the central processing unit **61** produces a video signal **Vs** and an audio signal **As** on the basis of the current positions, and instructs the input/output interface **61g** to transfer the video signal **Vs** and the audio signal **As** to the image display **67** and an amplifier **74**. The image display produces a moving picture on the screen, and the amplifier **74** makes the speaker system **69** to produce sounds.

The personal computer **62** supplies the parameters of the equation of motion and the touch data codes to the controlling unit **40**, and the parameters and the touch data codes form the data tables **45a** to **45d** and the data table **48c** in the controlling unit **40**. Thus, the contents of the data tables **45a** to **45d** and **48** are supplied from the outside, and, are accordingly, modifiable by changing the controlling program. In this instance, the personal computer **61** changes the contents of the data tables depending upon the virtual environment. For example, the personal computer makes the steering wheel heavy so as to make the driver experience a graveled road, and the steering wheel light so as to make the driver experience a rainy road.

As will be appreciated from the foregoing description, the inner force sense controller according to the present invention courses a person to experience a virtual environment, and is suitable floor an amusement apparatus such as the driving simulator.

FIG. **18** illustrates a keyboard **80** associated with the inner force sense controller according to the present invention. The keyboard may form a part of an electronic keyboard musical instrument. A plurality of black/white keys **81** are turnably supported by a stationary supporting member **82**, and are held in contact with plungers **83a** of solenoid-operated linear actuators **83**. Linear sensors **84** are attached to the solenoid-operated linear actuator **83**, and produce an analog positional signal **Sx** representative of a current plunger position and, accordingly, a current key position. The analog positional signal **Sx** is supplied to the controlling unit **40**, and determines the magnitude of reaction force **F**. The controlling unit **40** supplies a driving current signal **Ix** equivalent to the reaction force **F**, and the solenoid-operated linear actuator **83** projects the plunger **83a** against the key motion. The player feels the reaction to be similar to the key touch of the black/white key of an acoustic piano. Thus, the

inner force sense controller according to the present invention controls the linear actuators **83**, only.

FIGS. **19**, **20** and **21** illustrate other applications of the inner force sense controller. A lever **85a** is fixed to a rotary shaft **85b** of a solenoid-operated rotary actuator **85c**, and a rotary sensor **85d** monitors the rotary shaft **85b**. The rotary sensor **85d** produces an analog positional signal **Sx** representative of a current angular position of the rotary shaft **85c**, and supplies the analog positional signal **Sx** to the controlling unit (not shown). The controlling unit determines a target reaction force, and supplies a driving current signal **Ix** representative of the target reaction moment to the solenoid-operated rotary actuator **85b**. The solenoid-operated rotary actuator **85b** exerts the target reaction moment on the lever **85a**, and an operator feels the reaction moment to be an inner force sense. A dial **86** may be attached to the rotary shaft **85c** as shown in FIG. **20**. A push-down button **87** may be attached to the plunger **88b** of a solenoid-operated linear actuator **88b**, and a linear sensor **88c** may monitors the plunger **88c** as shown in FIG. **21**.

The inner force sense controller according to the present invention may be provided for two-dimensional actuators only. FIG. **22** illustrates a two-dimensional manipulator available for a musical instrument. A lever **90a** is fixed to rotary shafts **91a** of two solenoid-operated rotary actuators **91** arranged in perpendicular to each other, and rotary sensors **92** monitor the rotary shafts **91a**, respectively. The rotary sensors **91a** produce analog angular positional signals **Sx** and **Sy** representative of current angular positions of the rotary shafts **91a**, and supply the analog angular positional signals **Sx** and **Sy** to the controlling unit (not shown). The controlling unit determines target reaction moments, and supply driving current signals **Ix** and **Iy** representative of the target reaction moment to the solenoid-operated rotary actuators **91**. The solenoid-operated rotary actuators **91** exert the target reaction moments on the lever **90a**, and an operator feels the reaction moments to be an inner force sense.

A player specifies a note by rotating the lever **90a** in the direction of allow **AR20** and the intensity of sound by rotating the lever **90a** in the direction of allow **AR21**. The controlling unit intermittently increases the reaction moment, and lets the player know appropriate angular positions. The angular position in the direction of arrow **AR21** may specify a timbre of sounds.

FIG. **23** illustrates another manipulator incorporated in a trombone type musical instrument. A lever **93** is slidable in the direction of allow **AR22** and turnable in the direction of allow **AR23**. A solenoid-operated linear actuator **94** and a solenoid-operated rotary actuator **95** are connected to the lever **93**, and a linear sensor **96** and a rotary sensor **97** monitor the movable element of the solenoid-operated linear actuator **94** and the movable element of the solenoid-operated rotary actuator **95**, respectively. A player moves the lever **93** in the direction of allow **AR22** for specifying a note and in the direction of allow **AR23** for regulating the intensity of sounds. The lever **93** may be replaced with a grip **98** as shown in FIG. **24**.

The inner force sense controller may be incorporated in a musical instrument performed by manipulating a three-dimensional actuator **100** is shown in FIG. **25**. The three-dimensional actuator **100** has three solenoid-operated linear actuators **100a**, **100b** and **100c** arranged in an orthogonal set, and a knob **101** is connected to a plunger **100d** of the solenoid-operated linear actuator **100a**, and the solenoid-operated linear actuator **100a** is turnably supported by a retainer ring **102**. Plungers **100e/100f** of the solenoid-

operated linear actuators **100b/100c** are connected to the plunger **100d** of the solenoid-operated linear actuator **100a**. A player moves the knob **101** in the directions of arrows **AR24**, **AR25** and **AR26**, and the motion of knob **101** is transferred to the plungers **100d/100e/100f**. Sensors **103a**, **103b** and **103c** monitor the motions of the plungers **100d/100e/100f**, and supply analog positional signals $S_z/S_x/S_y$ to a controlling unit **104**. The controller **104** supplies driving currents I_x , I_y and I_z to the solenoid-operated linear actuators **100b**, **100c** and **100a**, and intermittently applies resistance against the motion of the knob **101**. Thus, the player feels the knob **101** click.

The controller **104** not only applies the click but also determines a note, an intensity and a timbre for an electronic sound depending upon the current position in the direction of arrow **AR25**, the current position in the direction of arrow **AR24** and the current position in the direction of arrow **AR26**. The controlling unit **104** displays music information only a display **105**, and instructs the sound to be produced to a sound generating system **106**.

Using the three-dimensional actuator **100**, a handicapped person such as the blind can play a tune by manipulating the knob **101**. Thus, the inner force sense controller not only gives a click to the player but also specifies the note, the intensity and the timbre.

Modifications

Although the particular embodiments of the present invention have been shown and described, it will be obvious to those skilled in the art that various changes and modifications may be made without departing from the spirit and scope of the present invention.

For example, the inner force sense controller may determine the contents of the three-dimensional data tables **51a** to **51d**, the contents of the parameter correction tables **51e/51f** and the contents of the multiplication tables **51g/51h** by itself so as to write the relations into a suitable memory.

The inner force sense controller may be used for a flight simulator for an airplane. In the simulator, the personal computer **61** gives the current positions, the current velocities and the current accelerations for controlling the actuators **70a**, **70b** and **70c**. The current positions, the current velocities and the current accelerations may be supplied through an information communicating network to the controlling unit **40**. For example, two inner force sense controllers may be placed at different locations. In this instance, the analog positional signals may be supplied from one of the controllers to the other so that another person experiences the inner force sense on the different inner force sense controller.

The inner sense controller may be used in a joy stick **110** connected to a two-dimensional actuator **111** as shown in FIG. 26.

The inner sense controller may be used in a shape recognition system **120**. In this instance, while a manipulator **121** is moving along the profile of an object (not shown), the inner force sense controller minimizes the reaction. However, if the manipulator is spaced from the profile, the inner force sense controller increases the reaction. Therefore, when an operator moves the manipulator **121** around the profile, the manipulator is forced to trace the profile, and the operator easily determines the shape of the object.

The inner force sense controller may be used in a three-dimensional shape recognition system shown in FIG. 28. Caps **131** and **132** are put only two fingers of an operator, and eight strings are stretched between the two caps **131/132** and eight linear actuators. If no virtual object is in contact

with the caps **131/132**, the eight linear actuators minimize the tension exerted on the strings. However, when the virtual object is brought into contact with the caps **131/132**, the linear actuators selectively increase the tension, and the operator recognizes the configuration of the virtual object.

The inner force sense controller may be used in a remote cooperation system shown in FIG. 29. A controlling lever **140** is associated with linear actuators **140a/140b/140c**, and various tactile sense sheets **141** are attached to a connecting rod **143**.

The linear actuators may be not arranged in an orthogonal set. However, if the linear actuators are arranged in an orthogonal set, the target forces are easily calculated.

The digital positional signal, the digital velocity signal and the digital acceleration signal may be selectively combined for forming address signals to the data tables **45a** to **45d**. Similarly, the digital positional signals DSX/DSY or $DSX/DSY/DSZ$, the digital velocity signals DSX'/DSY' or $DSX'/DSY'/DSZ'$ and the digital acceleration signals DSX''/DSY'' or $DSX''/DSY''/DSZ''$ may be used for selecting the digital component data codes.

The data table **48c** may be responsive to the digital positional signal, the digital velocity signal and the digital acceleration signal for reading out one of the sets of parameters M , ρ , κ and f . In this instance, the fifth component force **DF5** is calculated by using the set of parameters.

As to the fifth embodiment, the current velocities y' and z' may be used in the calculation of term px' . The current accelerations y'' and z'' may be used in the calculation of Mx'' .

An interpolation may be carried out for obtaining an appropriate group of parameters.

The data tables in the third or fourth embodiment may be produced through the analysis described in connection with the fifth embodiment.

The current velocity and the current acceleration may be directly determined by using suitable sensors. The current velocity and the current position may be calculated from a current acceleration.

The control sequence of the inner force sense controller results in a method of giving an inner force sense. The contents of the data tables may be supplied from a data storing medium or through an information communicating network. The contents of the data tables may be magnetically, electrically or optically read out from a magnetic disk, an optical disk, a CD-ROM or a semiconductor memory device.

What is claimed is:

1. An inner force sense controller for giving a force to a manipulator comprising:

- an actuator connected to said manipulator, and driving said manipulator in more than one direction;
- a detector for detecting said current position of said manipulator;
- a controller connected to said actuator and said detector, and producing a controlling signal representative of said force to be produced by said actuator;
- a driver responsive to said controlling signal for energizing said actuator, thereby exerting said force to said manipulator; and
- a determining means for determining the direction of a motion of said manipulator, and causing said controller to take said direction of said motion of said manipulator into account for determining the magnitude of said force.

2. The inner force sense controller as set forth in claim 1, in which said force is exerted on said manipulator in the opposite direction to said direction of said motion.

3. The inner force sense controller as set forth in claim 1, in which said force is exerted on said manipulator in the same direction as said motion thereof.

4. The inner force sense controller as set forth in claim 1, in which said manipulator is a key incorporated in a keyboard musical instrument so that said force gives a player an inner force sense similar to that of said key differently varied between a forward motion and a backward motion.

5. The inner force sense controller as set forth in claim 4, in which said keyboard musical instrument is an acoustic piano.

6. An inner force sense controller for giving a force to a manipulator comprising:

an actuator connected to said manipulator, and driving said manipulator in more than one direction;

a detector for detecting said current position of said manipulator;

a controller connected to said actuator and said detector, and producing a controlling signal representative of said force to be produced by said actuator; and

a driver responsive to said controlling signal for energizing said actuator, thereby exerting said force to said manipulator, wherein

said controller determines a current velocity and a current acceleration on the basis of said current position, and decides the magnitude of said force on the basis of a combination of elements selected from the group consisting of said current position, said current velocity and said current acceleration.

7. The inner force sense controller as set forth in claim 6, in which said controller includes data tables storing parameters of an equation of motion, and said parameters are selectively read out from said data tables on the basis of said combination for determining said force.

8. The inner force sense controller as set forth in claim 6, in which said manipulator is a key incorporated in a keyboard musical instrument.

9. The inner force sense controller as set forth in claim 8, in which said keyboard musical instrument is an acoustic piano.

10. A method for controlling an inner force sense comprising the steps of:

a) producing a piece of status information representative of a current status of a manipulator movable in more than one direction;

b) determining the magnitude of a force on the basis of said current status and a direction of a motion of said manipulator; and

c) exerting said force on said manipulator for imparting said inner force sense.

11. The method as set forth in claim 10, in which said piece of status information causes component forces corresponding, to terms of an equation of motion to be read out from data tables for determining said magnitude of said force.

12. The method as set forth in claim 8, in which contents of said data tables are supplied from an information storage medium before said step b).

13. The method as set forth in claim 8, in which contents of said data tables are supplied through an information communicating network.

14. The method as set forth in claim 10, in which said manipulator is a key incorporated in a keyboard musical instrument so that said force gives a player an inner force sense similar to that of said key differently varied between a forward motion and a backward motion.

15. The method as set forth in claim 14, in which said keyboard musical instrument is an acoustic piano.

16. An information storage medium for storing a controlling program, said controlling program comprising the steps of:

a) producing a piece of status information representative of a current status of a manipulator movable in more than one direction;

b) determining the magnitude of a force on the basis of said current status and a direction of a motion of said manipulator; and

c) exerting said force on said manipulator for imparting said inner force sense.

17. The information storage medium as set forth in claim 16, in which said manipulator is a key incorporated in a keyboard musical instrument so that said force gives a player an inner force sense similar to that of said key differently varied between a forward motion and a backward motion.

18. The method as set forth in claim 17, in which said keyboard musical instrument is an acoustic piano.

19. An inner force sense controller for exerting a force on a manipulator movable in more than one direction by using an actuator, comprising a means for receiving a program through an information communicating network, said program including the steps of:

a) producing a piece of status information representative of a current status of a manipulator movable in more than one direction;

b) determining the magnitude of a force on the basis of said current status and a direction of a motion of said manipulator; and

c) exerting said force on said manipulator for imparting said inner force sense.

20. The inner force sense controller as set forth in claim 19, in which said manipulator is a key incorporated in a keyboard musical instrument so that said force gives a player an inner force sense similar to that of said key differently varied between a forward motion and a backward motion.

21. The method as set forth in claim 20, in which said keyboard musical instrument is an acoustic piano.

* * * * *