



Haiku 60

The ceiling fan, reinvented

The 60-inch (1.5-m) Haiku® is the first Big Ass Fan® designed with homes and small spaces in mind. Its precision hand balancing and silent operation combine for lasting, perfect performance. Haiku is handcrafted with premium materials, including sustainable Moso bamboo, durable glass-infused matrix composite, and polished aircraft-grade aluminum. Holding the top ENERGY STAR® ranking for ceiling fans, Haiku's energy efficiency exceeds testing requirements by more than 450%.

Sophisticated control options include seven speeds, as well as special settings such as Whoosh® Mode, a proprietary feature which simulates the variations in natural airflow for a greater cooling effect. Winner of more than 45 international design and technology awards, Haiku is everything you expect from Big Ass Fans, designed specifically for your home.

Features and Benefits

- Top-ranked ENERGY STAR fan
- Ten unique control settings, including sleep and timer
- Variety of mount options for flat or pitched ceilings 8 feet and taller
- Hand balanced for wobble-free operation at all speeds
- Optional patented LED module
- Comes with slender remote control; also available with wall control
- Available with bamboo, matrix composite or aircraft-grade aluminum airfoils
- Limited-edition satin nickel and oil-rubbed bronze mount and hardware available with bamboo finishes only
- Available with SenseME™ technology that keeps you comfortable automatically





(877) 244-3267 | BIGASSFANS.COM

06-02-2015



Haiku 60

TECHNICAL SPECIFICATIONS

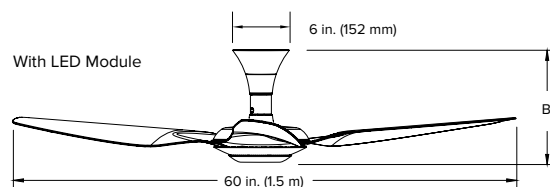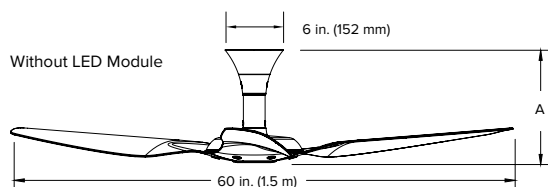

Technical Specifications

Model	Haiku Bamboo Short Mount	
Model number	S3150-SO-XX-XX-03-C ¹	
Fan diameter	60 in. (1.5 m)	
Fan height (A)	11.8 in. (299.7 mm)	
Fan height (B)	12.3 in. (312.4 mm)	
Hanging weight	16 lb (7.3 kg) ²	
Motor and assembly finishes	Caramel: white, black, satin nickel, oil-rubbed bronze Cocoa: black, satin nickel, oil-rubbed bronze	
Airfoil material	Bamboo	
Airfoil finishes	Caramel or Cocoa	
Number of airfoils	3	
Motor type	EC motor with digital inverter drive	
Number of fan speeds	6	
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz	
RPM (min/max)	33/180 RPM	
Amps (min/max)	0.05/0.363 A	
Watts (min/max)	1.8/14 W	
Remote control	Included	
Wireless wall control	Optional	
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed	
	LIGHT: Light on/off 16 dimmable light settings	
Operational temperature range	32 to 104°F (0 to 40°C)	
Environment	For indoor use only	
Warranty (Residential)³	Motor	Limited Lifetime in the US and Canada
	All other components	1 year in the US and Canada
Warranty (Commercial)³	Motor	2 years in the US and Canada
	All other components	1 year in the US and Canada

¹ XX-XX indicates placeholder numbers, which vary depending on LED option, where the fan was built, and other factors.

² The actual, precise fan weight will vary based on individual component weights and finishing.

³ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote



Optional Wireless Wall Control



Optional LED Module



Airfoil Finishes



Caramel





Cocoa



BIG ASS
FANS

Haiku 60

TECHNICAL SPECIFICATIONS

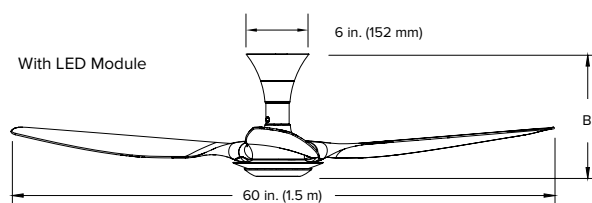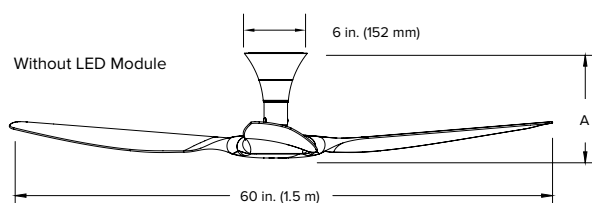

Technical Specifications

Model	Haiku Matrix Composite Short Mount	
Model number	K3150-SO-XX-XX-03-C ¹	
Fan diameter	60 in. (1.5 m)	
Fan height (A)	11.3 in (287.0 mm)	
Fan height (B)	11.8 in. (299.7 mm)	
Hanging weight	16 lb (7.3 kg) ²	
Motor and assembly finishes	Black or white	
Airfoil material	Matrix composite	
Airfoil finishes	Black or white	
Number of airfoils	3	
Motor type	EC motor with digital inverter drive	
Number of fan speeds	6	
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz	
RPM (min/max)	35/177 RPM	
Amps (min/max)	0.05/0.363 A	
Watts (min/max)	1.8/21.4 W	
Remote control	Included	
Wireless wall control	Optional	
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed	
	LIGHT: Light on/off 16 dimmable light settings	
Operational temperature range	32 to 104°F (0 to 40°C)	
Environment	Indoor or covered outdoor use ³	
Warranty (Residential)⁴	Motor	Limited Lifetime in the US and Canada
	All other components	1 year in the US and Canada
Warranty (Commercial)⁴	Motor	2 years in the US and Canada
	All other components	1 year in the US and Canada

¹ XX-XX indicates placeholder numbers, which vary depending on LED option, where the fan was built, and other factors.

² The actual, precise fan weight will vary based on individual component weights and finishing.

³ Certified by ETL to UL507 damp rated applications

⁴ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote



Optional Wireless Wall Control




Optional LED Module



Airfoil Finishes



Black





White



Haiku 60

TECHNICAL SPECIFICATIONS

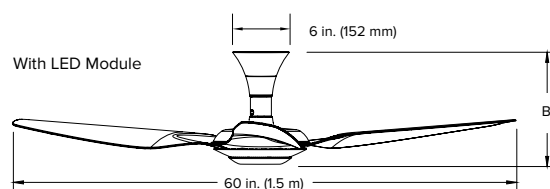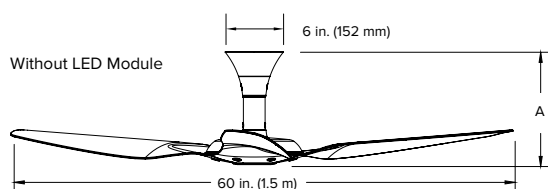

Technical Specifications

Model	Haiku Aluminum Short Mount	
Model number	S3150-S0-AB-04-03-C-F421	
Fan diameter	60 in. (1.5 m)	
Fan height (A)	11.8 in. (299.7 mm)	
Fan height (B)	12.3 in. (312.4 mm)	
Hanging weight	18.5 lb (8.4 kg) ¹	
Motor and assembly finishes	Black or white	
Airfoil material	Aluminum	
Airfoil finishes	Polished Aluminum	
Number of airfoils	3	
Motor type	EC motor with digital inverter drive	
Number of fan speeds	6	
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz	
RPM (min/max)	33/180 RPM	
Amps (min/max)	0.05/0.363 A	
Watts (min/max)	1.8/14 W	
Remote control	Included	
Wireless wall control	Optional	
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed	
	LIGHT: Light on/off 16 dimmable light settings	
Operational temperature range	32 to 104°F (0 to 40°C)	
Environment	For indoor or covered outdoor use ²	
Warranty (Residential)³	Motor	Limited Lifetime in the US and Canada
	All other components	1 year in the US and Canada
Warranty (Commercial)³	Motor	2 years in the US and Canada
	All other components	1 year in the US and Canada

¹ The actual, precise fan weight will vary based on individual component weights and finishing.

² Certified by ETL to UL507 damp rated applications

³ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote



Optional Wireless Wall Control



Optional LED Module



Airfoil Finishes





Polished Aluminum



BIG ASS
FANS

Haiku 60

TECHNICAL SPECIFICATIONS

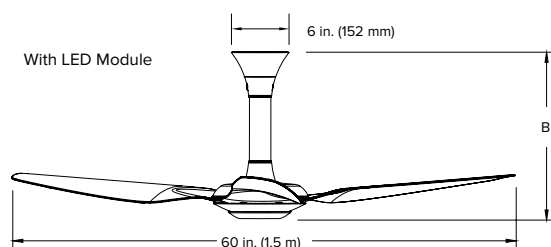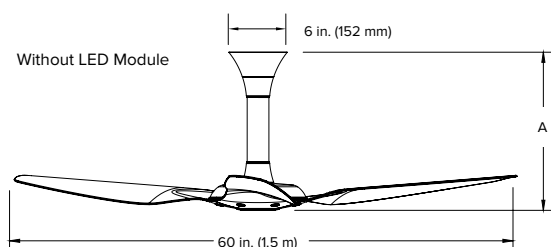

Technical Specifications

Model	Haiku Bamboo Standard Mount	
Model number	S3150-A2-XX-XX-03-C ¹	
Fan diameter	60 in. (1.5 m)	
Fan height (A)	16.4 in. (416.8 mm)	
Fan height (B)	17.5 in. (444.8 mm)	
Hanging weight	16 lb (7.3 kg) ²	
Motor and assembly finishes	Caramel: white, black, satin nickel, oil-rubbed bronze Cocoa: black, satin nickel, oil-rubbed bronze	
Airfoil material	Bamboo	
Airfoil finishes	Caramel or Cocoa	
Number of airfoils	3	
Motor type	EC motor with digital inverter drive	
Number of fan speeds	6	
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz	
RPM (min/max)	35/202 RPM	
Amps (min/max)	0.05/0.363 A	
Watts (min/max)	1.7/23 W	
Remote control	Included	
Wireless wall control	Optional	
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed	
	LIGHT: Light on/off 16 dimmable light settings	
Operational temperature range	32 to 104°F (0 to 40°C)	
Environment	For indoor use only	
Warranty (Residential)³	Motor	Limited Lifetime in the US and Canada
	All other components	1 year in the US and Canada
Warranty (Commercial)³	Motor	2 years in the US and Canada
	All other components	1 year in the US and Canada

¹ XX-XX indicates placeholder numbers, which vary depending on LED option, where the fan was built, and other factors.

² The actual, precise fan weight will vary based on individual component weights and finishing.

³ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote



Optional Wireless Wall Control



Optional LED Module



Airfoil Finishes



Caramel





Cocoa



BIG ASS
FANS

Haiku 60

TECHNICAL SPECIFICATIONS

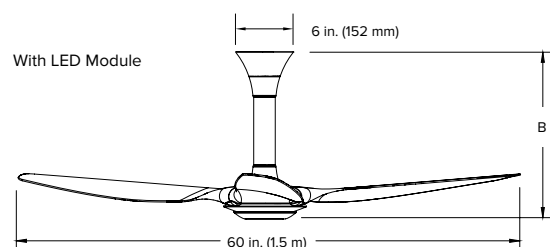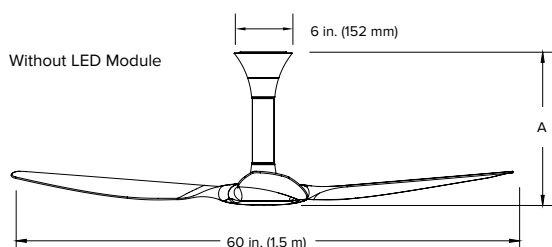

Technical Specifications

Model	Haiku Matrix Composite Standard Mount	
Model number	K3150-A2-XX-XX-03-C ¹	
Fan diameter	60 in. (1.5 m)	
Fan height (A)	16.2 in. (411 mm)	
Fan height (B)	17.4 in. (441.7 mm)	
Hanging weight	16 lb (7.3 kg) ²	
Motor and assembly finishes	Black or white	
Airfoil material	Matrix composite	
Airfoil finishes	Black or white	
Number of airfoils	3	
Motor type	EC motor with digital inverter drive	
Number of fan speeds	6	
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz	
RPM (min/max)	36/202 RPM	
Amps (min/max)	0.05/0.363 A	
Watts (min/max)	1.8/32 W	
Remote control	Included	
Wireless wall control	Optional	
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed	
	LIGHT: Light on/off 16 dimmable light settings	
Operational temperature range	32 to 104°F (0 to 40°C)	
Environment	Indoor or covered outdoor use ³	
Warranty (Residential)⁴	Motor	Limited Lifetime in the US and Canada
	All other components	1 year in the US and Canada
Warranty (Commercial)⁴	Motor	2 years in the US and Canada
	All other components	1 year in the US and Canada

¹ XX-XX indicates placeholder numbers, which vary depending on LED option, where the fan was built, and other factors.

² The actual, precise fan weight will vary based on individual component weights and finishing.

³ Certified by ETL to UL507 damp rated applications

⁴ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote



Optional Wireless Wall Control




Optional LED Module



Airfoil Finishes



Black





White



BIG ASS
FANS

Haiku 60

TECHNICAL SPECIFICATIONS

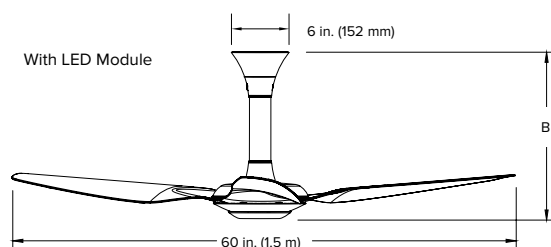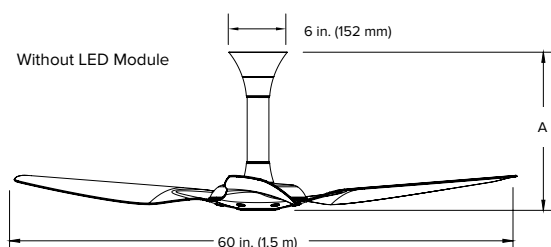

Technical Specifications

Model	Haiku Aluminum Standard Mount	
Model number	S3150-A2-AB-04-03-C-F421	
Fan diameter	60 in. (1.5 m)	
Fan height (A)	16.4 in. (416.8 mm)	
Fan height (B)	17.5 in. (444.8 mm)	
Hanging weight	18.5 lb (8.4 kg) ¹	
Motor and assembly finishes	Black or white	
Airfoil material	Aluminum	
Airfoil finishes	Polished Aluminum	
Number of airfoils	3	
Motor type	EC motor with digital inverter drive	
Number of fan speeds	6	
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz	
RPM (min/max)	35/202 RPM	
Amps (min/max)	0.05/0.363 A	
Watts (min/max)	1.7/23 W	
Remote control	Included	
Wireless wall control	Optional	
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed	
	LIGHT: Light on/off 16 dimmable light settings	
Operational temperature range	32 to 104°F (0 to 40°C)	
Environment	For indoor or covered outdoor use ²	
Warranty (Residential)³	Motor	Limited Lifetime in the US and Canada
	All other components	1 year in the US and Canada
Warranty (Commercial)³	Motor	2 years in the US and Canada
	All other components	1 year in the US and Canada

¹ The actual, precise fan weight will vary based on individual component weights and finishing.

² Certified by ETL to UL507 damp rated applications

³ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote




Optional Wireless Wall Control



Optional LED Module



Airfoil Finishes





Polished Aluminum



BIG ASS
FANS

Haiku 60

TECHNICAL SPECIFICATIONS

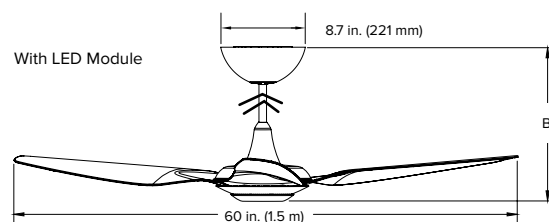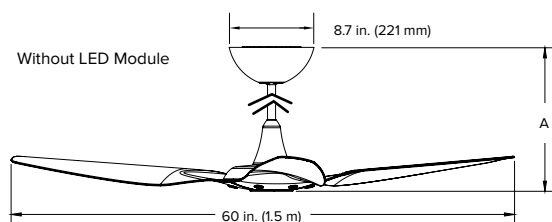

Technical Specifications

Model	Haiku Bamboo Extended Mount				
Model number	S3150-X2-XX-XX-01-A ¹				
Extension Length	7 in. (177.8 mm)	20 in. (508 mm)	32 in. (812.8 mm)	48 in. (1219.2 mm)	60 in. (1524 mm)
Fan diameter	60 in. (1.5 m)				
Fan height (A)	15.5 in. (393.7 mm)	28.5 in. (723.9 mm)	40.5 in. (1028.7 mm)	56.5 in. (1435.1 mm)	68 in. (1727.2 mm)
Fan height (B)	16 in. (406.4 mm)	29 in. (736.6 mm)	41 in. (1041.4 mm)	57.5 in. (1461 mm)	68.5 in. (1739.9 mm)
Hanging weight	15 lb (6.8 kg) ²				
Motor and assembly finishes	Caramel: white, black, satin nickel, oil-rubbed bronze Cocoa: black, satin nickel, oil-rubbed bronze				
Airfoil material	Bamboo				
Airfoil finishes	Caramel or Cocoa				
Number of airfoils	3				
Motor type	EC motor with digital inverter drive				
Number of fan speeds	7				
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz				
RPM (min/max)	35/198 RPM				
Amps (min/max)	0.05/0.363 A				
Watts (min/max)	2/22 W				
Remote control	Included				
Wireless wall control	Optional				
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed				
	LIGHT: Light on/off 16 dimmable light settings				
Operational temperature range	32 to 104°F (0 to 40°C)				
Environment	For indoor use only				
Warranty (Residential) ³	Motor	Limited Lifetime in the US and Canada			
	All other components	1 year in the US and Canada			
Warranty (Commercial) ³	Motor	2 years in the US and Canada			
	All other components	1 year in the US and Canada			

¹XX-XX indicates placeholder numbers, which vary depending on LED option, where the fan was built, and other factors.

²The actual, precise fan weight will vary based on individual component weights and finishing.

³Warranties vary by country. See full warranty for details.

Accessories

Standard Remote



Optional Wireless Wall Control



Optional LED Module



Airfoil Finishes



Caramel



Cocoa





BIG ASS
FANS

An ISO 9001:2008 certified company | ©2015 Delta T Corporation dba Big Ass Solutions. All rights reserved

Haiku 60

TECHNICAL SPECIFICATIONS

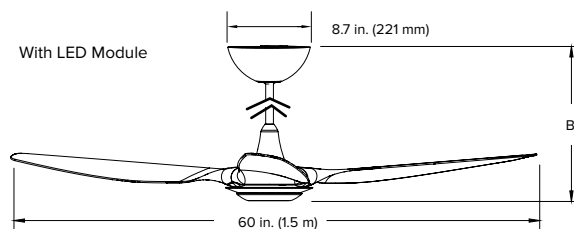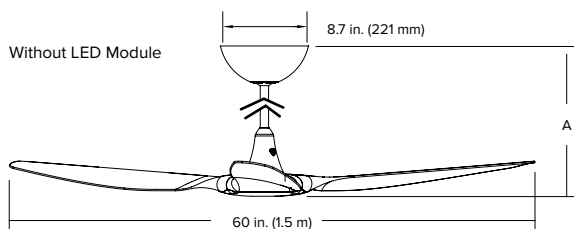

Technical Specifications

Model	Haiku Matrix Composite Extended Mount				
Model number	K3150-X2-XX-XX-01-A ¹				
Extension length	7 in. (177.8 mm)	20 in. (508 mm)	32 in. (812.8 mm)	48 in. (1219.2 mm)	60 in. (1524 mm)
Fan diameter	60 in. (1.5 m)				
Fan height (A)	15 in. (381 mm)	28 in. (711 mm)	40 in. (1016 mm)	56 in. (1422 mm)	68.5 in. (1739.9 mm)
Fan height (B)	15.5 in. (393.7 mm)	28.5 in. (723.9 mm)	40.5 in. (1028.7 mm)	56.5 in. (1435.1 mm)	69 in. (1752.6 mm)
Hanging weight	15 lb (6.8 kg) ²				
Motor and assembly finishes	Black or white				
Airfoil material	Matrix composite				
Airfoil finishes	Black or white				
Number of airfoils	3				
Motor type	EC motor with digital inverter drive				
Number of fan speeds	7				
Operating voltage and frequency	100–240 VAC, 1 Φ, 50–60 Hz				
RPM (min/max)	35/198 RPM				
Amps (min/max)	0.05/0.363 A				
Watts (min/max)	2/32 W				
Remote control	Included				
Wireless wall control	Optional				
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed				
	LIGHT: Light on/off 16 dimmable light settings				
Operational temperature range	32 to 104°F (0 to 40°C)				
Environment	Indoor or covered outdoor use ³				
Warranty (Residential) ³	Motor	Limited Lifetime in the US and Canada			
	All other components	1 year in the US and Canada			
Warranty (Commercial) ³	Motor	2 years in the US and Canada			
	All other components	1 year in the US and Canada			

¹ XX-XX indicates placeholder numbers, which vary depending on LED option, where the fan was built, and other factors.

² The actual, precise fan weight will vary based on actual individual component weights and finishing.

³ Certified by ETL to UL507 damp rated applications

⁴ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote



Optional Wireless Wall Control




Optional LED Module



Airfoil Finishes



Black





White



An ISO 9001:2008 certified company | ©2015 Delta T Corporation dba Big Ass Solutions. All rights reserved

Haiku 60

TECHNICAL SPECIFICATIONS

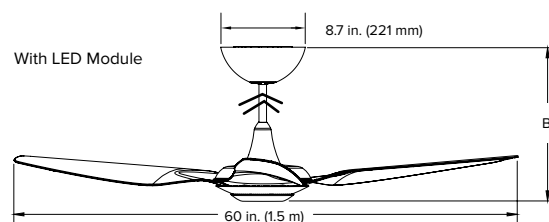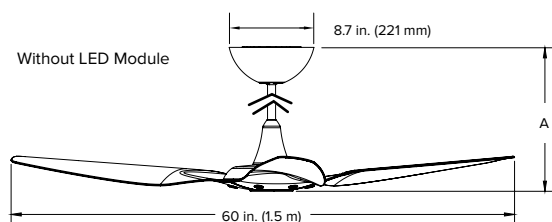

Technical Specifications

Model	Haiku Aluminum Extended Mount				
Model number	S3150-X2-AB-04-03-C-F421				
Extension Length	7 in. (177.8 mm)	20 in. (508 mm)	32 in. (812.8 mm)	48 in. (1219.2 mm)	60 in. (1524 mm)
Fan diameter	60 in. (1.5 m)				
Fan height (A)	15.5 in. (393.7 mm)	28.5 in. (723.9 mm)	40.5 in. (1028.7 mm)	56.5 in. (1435.1 mm)	68 in. (1727.2 mm)
Fan height (B)	16 in. (406.4 mm)	29 in. (736.6 mm)	41 in. (1041.4 mm)	57.5 in. (1461 mm)	68.5 in. (1739.9 mm)
Hanging weight	17.5 lb (8 kg) ¹				
Motor and assembly finishes	Black or white				
Airfoil material	Aluminum				
Airfoil finishes	Polished Aluminum				
Number of airfoils	3				
Motor type	EC motor with digital inverter drive				
Number of fan speeds	7				
Operating voltage and frequency	100–240 VAC, 1 Φ , 50–60 Hz				
RPM (min/max)	35/198 RPM				
Amps (min/max)	0.05/0.363 A				
Watts (min/max)	2/22 W				
Remote control	Included				
Wireless wall control	Optional				
Controller features	FAN: Whoosh® mode On/off Sleep mode Timer Speed				
	LIGHT: Light on/off 16 dimmable light settings				
Operational temperature range	32 to 104°F (0 to 40°C)				
Environment	For indoor or covered outdoor use ²				
Warranty (Residential) ³	Motor	Limited Lifetime in the US and Canada			
	All other components	1 year in the US and Canada			
Warranty (Commercial) ³	Motor	2 years in the US and Canada			
	All other components	1 year in the US and Canada			

¹ The actual, precise fan weight will vary based on individual component weights and finishing.

² Certified by ETL to UL507 damp rated applications

³ Warranties vary by country. See full warranty for details.

Accessories

Standard Remote




Optional Wireless Wall Control



Optional LED Module



Airfoil Finishes



Polished Aluminum




BIG ASS
FANS


Optional Accessory:

Haiku LED Kit

TECHNICAL SPECIFICATIONS

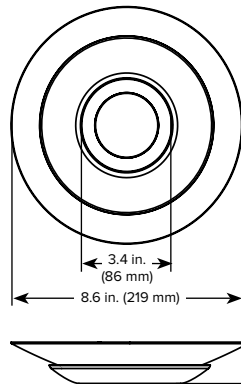

Composite LED

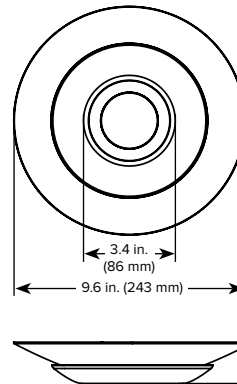

**Bamboo / Polished
Aluminum LED**

Technical Specifications

Operating voltage	12VDC/24VDC
Operating current	1.5 Adc (100% PWM)
Nominal input power	16.3 W
Operating temperature	32 to 104°F (0 to 40°C)
Lens diameter	5.7 in. (145 mm)
Lumen output	1280 Lm
Typical CR	82
Corresponding color temperature	2700 K
Dimming range	3–100%
Operating life expectancy	50,000 hours
Lens color	Diffused clear and smoky options included
Controller	On/off control Digital dimmer
Warranty	1 year in the US and Canada*

*1 year warranty available in the US and Canada; certain exclusions apply. Warranties vary by country. See full warranty for details.





BIGASS
FANS

Optional Accessory:

Haiku 60 Wall Controller

TECHNICAL SPECIFICATIONS

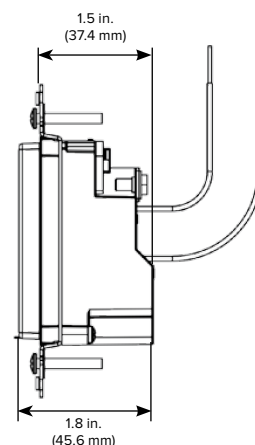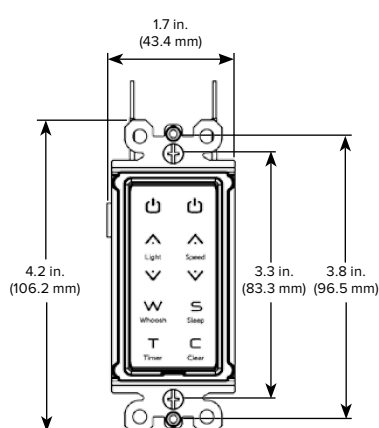

Technical Specifications

Model	WCO	
Compatible model number	S3150-SO-XX-XX-03-C	K3150-SO-XX-XX-03-C
	S3150-A2-XX-XX-03-C	K3150-A2-XX-XX-03-C
	S3150-X2-XX-XX-01-A	K3150-X2-XX-XX-01-A
Color	White	
RF frequency	900 Mhz	
Operating range	20 ft (6.1 m) from controller to fan; successive fans must be within 20 ft (6.1 m) of each other	
Multiple fan operation ¹	Control up to four fans with a single controller	
Nominal input power	100–240V	
Wall control features	FAN: Whoosh® mode On/off Fan speeds: 6 or 7 (model dependent) Sleep mode Timer Reverse	
	LIGHT: Light on/off 16 dimmable light settings	
	Capacitive touch interface	
User interface	Capacitive touch interface	
Status indicator	White LEDs indicate user-entered values Blue LEDs indicate fan speed and lighting level LEDs turn off after 5 seconds of inactivity	
Parts included	Wireless wall control and mounting screws RF board and antenna retainer	
Wallplate	Not included; Decora® wallplate recommended	
Dimension	Fits standard electrical box	
Warranty	1 year warranty in the US and Canada ²	

¹ RF board must be ordered separately for each additional fan

² 1 year warranty available in the US and Canada; certain exclusions apply. Warranties vary by country. See full warranty for details.

Wall Controller



Controller Settings

 Light	LED module with 16 settings provides the perfect level of light for any need.	 Speed	Speed options from gentle heat recirculation to a cooling breeze.
 Whoosh	The exclusive Whoosh® mode simulates the variations in natural airflow.	 Sleep	Sleep mode reduces the fan speed by one increment every hour until the lowest speed is reached.
 Timer	In Timer mode , the fan runs at a set speed until the programmed time period ends.	 Clear	The Clear button returns the fan to default settings.

