WIPO
WORLD
INTELLECTUAL PROPERTY
ORGANIZATION

DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:		**PCT/SE2016/050841**
International filing date:		**08 September 2016 (08.09.2016)**
Document type:		**Certified copy of priority document**
Document details:	Country/Office:	**US**
	Number:	**62/232,743**
	Filing date:	**25 September 2015 (25.09.2015)**
Date of receipt at the International Bureau:		**09 September 2016 (09.09.2016)**

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-*bis*)

34, chemin des Colombettes
1211 Geneva 20, Switzerland
www.wipo.int

Digital Access Service
(DAS)

WIPO
WORLD
INTELLECTUAL PROPERTY
ORGANIZATION

CERTIFICATE OF AVAILABILITY OF A CERTIFIED PATENT DOCUMENT IN A DIGITAL LIBRARY

The International Bureau certifies that a copy of the patent application indicated below has been available to the WIPO Digital Access Service since the date of availability indicated, and that the patent application has been available to the indicated Office(s) as of the date specified following the relevant Office code:

Document details: Country/Office: US
Filing date: 25 Sep 2015 (25.09.2015)
Application number: 62232743

Date of availability of document: 13 Oct 2015 (13.10.2015)

The following Offices can retrieve this document by using the access code:
JP, US, SE, NZ, KR, ES, GB, AU, IB, CN, FI

Date of issue of this certificate: 09 Sep 2016 (09.09.2016)

34, chemin des Colombettes
1211 Geneva 20, Switzerland

www.wipo.int

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 09, 2016

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: *62/232,743*
FILING DATE: *September 25, 2015*

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US62/232,743*

Certified by

Michelle K. Lee

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

PTO/SB/16 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995 no persons are required to respond to a collection of information unless it displays a valid OMB control number

PROVISIONAL APPLICATION FOR PATENT COVER SHEET – Page 1 of 2

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. _____

INVENTOR(S)		
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
Tuomas	TIRRONEN	Helsinki, Finland
Johan	BERGMAN	Stockholm, Sweden
Yufei	BLANKENSHIP	Kildeer, Illinois
Emre	YAVUZ	Stockholm, Sweden

Additional inventors are being named on the _____ separately numbered sheets attached hereto.

TITLE OF THE INVENTION (500 characters max):

SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS

Direct all correspondence to: **CORRESPONDENCE ADDRESS**

☑ The address corresponding to Customer Number: 20792

OR

☐ Firm or Individual Name

Address

City	State	Zip
Country	Telephone	Email

ENCLOSED APPLICATION PARTS (*check all that apply*)

☑ Application Data Sheet. See 37 CFR 1.76.
☐ CD(s), Number of CDs _____
☑ Drawing(s) *Number of Sheets* 3
☐ Other (specify) _____
☑ Specification (e.g., description of the invention) *Number of Pages* 20

Fees Due: Filing Fee of $260 ($130 for small entity) ($65 for micro entity). If the specification and drawings exceed 100 sheets of paper, an application size fee is also due, which is $400 ($200 for small entity) ($100 for micro entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).

METHOD OF PAYMENT OF THE FILING FEE AND APPLICATION SIZE FEE FOR THIS PROVISIONAL APPLICATION FOR PATENT

☐ Applicant asserts small entity status. See 37 CFR 1.27.
☐ Applicant certifies micro entity status. See 37 CFR 1.29.
Applicant must attach form PTO/SB/15A or B or equivalent.
☐ A check or money order made payable to the *Director of the United States Patent and Trademark Office* is enclosed to cover the filing fee and application size fee (if applicable).

260
TOTAL FEE AMOUNT ($)

☑ Payment by credit card. Form PTO-2038 is attached.
☑ The Director is hereby authorized to charge the filing fee and application size fee (if applicable) or credit any overpayment to Deposit Account Number: 50-0220.

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 10 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/SB/16 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995 no persons are required to respond to a collection of information unless it displays a valid OMB control number

PROVISIONAL APPLICATION FOR PATENT COVER SHEET – Page 2 of 2

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☑ No.

☐ Yes, the invention was made by an agency of the U.S. Government. The U.S. Government agency name is: _____

☐ Yes, the invention was made under a contract with an agency of the U.S. Government. The name of the U.S. Government agency and Government contract number are: _____

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

SIGNATURE _____ DATE September 25, 2015

TYPED OR PRINTED NAME Scott C. Hatfield REGISTRATION NO. 38,176 (*if appropriate*)

TELEPHONE 919-854-1400 DOCKET NUMBER P48140_US1

P48140_US1

SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS

The present disclosure is directed to wireless communications and, more particularly, to random access procedures and related wireless terminals and base stations.

In a typical cellular radio system, wireless terminals communicate via a radio access network (RAN) with one or more core networks. The RAN covers a geographical area which is divided into cell areas, with each cell area being served by a base station. A cell area is a geographical area where radio coverage is provided by the base station at a base station site. The base stations communicate through wireless radio communication channels with wireless terminals within range of the base station subsystems.

Communications for machine-type communication (MTC) wireless terminals is a growing area of communications in radio access networks. Such MTC wireless terminals may be used to provide wirelessly networked sensors, meters, etc. In such applications, MTC wireless terminals may be expected to transmit relatively small amounts of uplink (UL) data relatively infrequently. Because MTC wireless terminals may be located in areas (e.g., basements) with unfavorable radio conditions, an MTC wireless terminal may have difficulty transmitting and/or receiving communications of a conventional random access procedure.

DETAILED DESCRIPTION

Inventive concepts will now be described more fully hereinafter with reference to the accompanying drawings, in which examples of embodiments of inventive concepts are shown. Inventive concepts may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of inventive concepts to those skilled in the art. It should also be noted that these embodiments are not mutually exclusive. Components from one embodiment may be tacitly assumed to be present/used in another embodiment.

For purposes of illustration and explanation only, these and other embodiments of inventive concepts are described herein in the context of operating in a RAN (Radio Access Network) that communicates over radio communication channels with wireless terminals (also referred to as UEs). It will be understood, however, that inventive concepts are not limited to such embodiments and may be embodied generally in any type of communication network. As used herein, a legacy or non-legacy wireless terminal (also referred to as a UE, user equipment node, mobile terminal, etc.) can include any device that receives data from and/or transmits data to a communication network, and may include, but is not limited to, a mobile telephone ("cellular" telephone), laptop/portable computer, pocket computer, hand-held computer, and/or desktop computer.

Samsung Exhibit 1007, Page 6 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

Note that although terminology from 3GPP (3rd Generation Partnership Project) LTE (Long Term Evolution) has been used in this disclosure to provide examples of embodiments of inventive concepts, this should not be seen as limiting the scope of inventive concepts to only the aforementioned system. Other wireless systems, including WCDMA, WiMax, UMB and GSM, may also benefit from exploiting ideas/concepts covered within this disclosure.

Also, note that terminology such as base station (also referred to as a eNodeB, eNB, etc.) and wireless terminal (also referred to as a mobile station, mobile terminal, UE, etc.) should be considering non-limiting and does not imply a certain hierarchical relation between the two. In general, a base station or "eNodeB" could be considered as a first device and a wireless terminal or "UE" could be considered as a second device, and these two devices may communicate with each other over some radio channel.

Figure 1 is a block diagram illustrating a Radio Access Network (RAN) according to some embodiments of present inventive concepts. As shown, communications between a plurality of base stations BS-a, BS-b, and BS-c may be provided using respective X2 Interfaces, and communications between base stations and one or more core network nodes MME/S-GW may be provided using respective S1 interfaces. Each base station BS may communicate over a wireless radio interface (including uplinks and downlinks) with respective wireless terminals UEs in a respective cell or cells supported by a base station. By way of example, base station BS-a is shown in communication with wireless terminals UE-a, UE-b, and UE-g, base station BS-b is shown in communication with wireless terminals UE-c and UE-d, and base station BS-c is shown in communication with wireless terminals UE-e and UE-f.

Figure 2 is a block diagram illustrating elements of a base station BS (also referred to as an eNB, eNodeB, an evolved NodeB, a radio base station, a RAN node, etc.) of Figure 1. As shown, a base station BS may include a transceiver circuit 201 (also referred to as a transceiver) configured to provide radio communications with a plurality of wireless terminals, a network interface circuit 205 (also referred to as a network interface) configured to provide communications with other base stations of the RAN (e.g., over the X2 interface), and a processor circuit 203 (also referred to as a processor) coupled to the transceiver circuit and the network interface circuit, and a memory circuit 207 coupled to the processor circuit. The memory circuit 207 may include computer readable program code that when executed by the processor circuit 203 causes the processor circuit to perform operations according to embodiments disclosed herein. According to other embodiments, processor circuit 203 may be defined to include memory so that a memory circuit is not separately provided. When elements of different base stations are discussed below, elements thereof may be distinguished by appending respective letters (e.g., "-a", "-b", etc.) to the element numbers (e.g., "201", "203", "205", and "207"). For example, base station BS-a of Figure 1 may include transceiver 201-a, processor 203-a, network interface 205-a and memory 207-a, and base station BS-b of Figure 1 may include transceiver 201-b, processor 203-b, network interface 205-b, and memory 207-b.

Figure 3 is a block diagram illustrating elements of a wireless terminal UE (also referred to as a mobile terminal, mobile station, a UE, a user equipment, a user equipment node, etc.) of Figure 1. As shown, a wireless terminal UE may include a transceiver circuit 301 (also referred to as a transceiver) configured to provide radio communications with a base station BS, a

Samsung Exhibit 1007, Page 7 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

processor circuit 303 (also referred to as a processor) coupled to the transceiver circuit, and a memory circuit 307 coupled to the processor circuit. The memory circuit 307 may include computer readable program code that when executed by the processor circuit 403 causes the processor circuit to perform operations according to embodiments disclosed herein. According to other embodiments, processor circuit 303 may be defined to include memory so that a memory circuit is not separately provided. When elements of different wireless terminals are discussed below, elements thereof may be distinguished by appending respective letters (e.g., "-a", "-b", etc.) to the element numbers (e.g., "301", "303", and "305"). For example, wireless terminal UE-a of Figure 1 may include transceiver 301-a, processor 303-a, and memory 307-a, and wireless terminal UE-b of Figure 1 may include transceiver 301-b, processor 303-b, and memory 307-b.

Figure 4 is a message diagram illustrating messages transmitted between a wireless terminal UE and a base station BS for a contention based random access procedure. Such a Random Access Procedure, for example, may be initiated by the wireless terminal UE to initiate attachment before RRC (Radio Resource Control) connection. During a random access procedure at operation 401, wireless terminal UE processor 303 may transmit a Random Access Preamble (Msg1) through transceiver 301 using a Physical Random Access Channel (PRACH). The wireless terminal UE processor 303 may randomly select the random access preamble from a set of available random access preambles. Moreover, wireless terminal UE processor 303 may transmit the Random Access Preamble without any prior allocation.

Responsive to receiving the random access preamble at operation 401 through transceiver 201, base station BS processor 203 may transmit a Random Access Response RAR (Msg2) through transceiver 201 at operation 402. More particularly, the Random Access Response RAR may include an uplink grant for a subsequent Message 3 to be transmitted by wireless terminal UE. Responsive to receiving Message 4 of operation 402 through transceiver 301, wireless terminal UE processor 303 may transmit Message 3 (e.g., an RRC connection request) through transceiver 301 at operation 403 using the uplink grant indicated in the RAR of operation 402. Responsive to receiving Message 3 of operation 403 through transceiver 201, base station BS processor 203 may transmit Message 4 through transceiver 201 at operation 404 to provide contention resolution and/or to provide a subsequent uplink grant.

As discussed in greater detail below, a format of the RAR of operation 402 may be different for different types of wireless terminals. For a conventional mobile wireless terminal UE (e.g., a cellular radiotelephone, a smartphone, a tablet computer, a laptop computer, etc.), the RAR of operation 402 may include uplink grant information for the subsequent uplink Message 3 of operation 403 without including repetition information for uplink Message 3 of operation 403 and/or without including information regarding the downlink Message 4 of operation 404. In contrast, an RAR of operation 402 for a MTC (machine-type communication) wireless terminal UE may include repetition information for uplink message 3 of operation 403 and/or downlink grant information for the subsequent downlink Message 4 of operation 404.

During a random access procedure in LTE (Long Term Evolution), after the wireless terminal UE has sent the initial PRACH (Physical Random Access Channel) preamble (operation 401) and received the Random Access Response (RAR) message from the base station BS

Samsung Exhibit 1007, Page 8 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

(operation 402), the wireless terminal UE sends Msg3 at operation 403 which may contain a message from upper layers, such as a Radio Resource Control (RRC) connection request. The Msg3 is scheduled using an uplink (UL) grant which is included in the RAR message (e.g., a Medium Access Control RAR message) as shown in Figure 5 (*see*, 3GPP TS 36.321, "Medium Access Control (MAC) protocol specification, Release 12," V12.5.0, Mar 2015). With a conventional wireless terminal UE (e.g., a cellular radiotelephone, a smartphone, a tablet computer, a laptop computer, etc.), Msg4 may be scheduled as a normal downlink transmission, by sending a downlink allocation over the control channel (e.g., the Physical Downlink Control Channel or PDCCH).

In examples discussed below, base station BS-a may provide wireless communications for wireless terminals UE-a, UE-b, and UE-g, wireless terminals UE-a and UE-g may be an MTC wireless terminals, and wireless terminal UE-b may be a conventional wireless terminal. Accordingly, random access procedures for wireless terminals UE-a and UE-g may be different than random access procedures for wireless terminal UE-b.

As shown in Figure 5, an RAR for conventional wireless terminal UE-b may include a reserved bit R, a timing advance command (11 bits), an uplink (UL) grant for Message 3 of operation 403 (20 bits), and a temporary identification (e.g., C-RNTI or cell radio network temporary identifier) for wireless terminal UE-b (16 bits). The UL grant (for Message 3 of operation 403) of Figure 5 may be specified in TS 36.213 (*see*, 3GPP TS 36.213, "Physical layer procedures," Release 12, V12.0.0, Dec 2013) and may have the following structure:

- Hopping flag – 1 bit
- Fixed size resource block assignment – 10 bits
- Truncated modulation and coding scheme – 4 bits
- TPC command for scheduled PUSCH – 3 bits
- UL delay – 1 bit
- CSI (Channel State Information) request – 1 bit

Thus the total size of the UL grant used in RAR may be 20 bits.

In 3GPP Rel-13 for MTC (Machine-Type Communications) wireless devices UEs, random access procedures may be specified for low complexity wireless terminals UEs and wireless terminals UEs requiring/using coverage enhancements (e.g., in situations where the UEs are in deep coverage in basements, etc.). Different methods may be used to obtain coverage enhancements, where an effect on current LTE procedures may come from time repetitions of various channels. Stated in other words, the data included in one TTI (Transmission Time Interval) may be repeated in time so the recipient(s) can accumulate energy over longer time periods to enhance the coverage of the transmissions.

For a random access procedure, coverage enhancements may mean extending the time it takes to send each of the messages (e.g., PRACH preamble, RAR, Msg3, and Msg4 and the related control channels, where applicable). The different repetition factors of messages (both data and control) and locations of the messages may need to be signaled or determined in one way or another so that MTC wireless terminal UE-a and the base station BS-a can communicate with each other and complete the random access procedure. Such repetition may not be needed, however, for non-MTC wireless terminals (e.g., for conventional wireless terminals such as

Samsung Exhibit 1007, Page 9 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

cellular radiotelephones, smartphones, tablet computers, laptop computers, etc.) such as wireless terminal UE-b.

The time domain configuration and frequency domain configuration for Message 3 (of operation 403) may need to be determined by MTC wireless terminal UE-a, but this may not be included in current systems/specifications such as the RAR of Figure 5.

A time domain configuration and frequency domain configuration for the control channel (e.g., M-PDCCH) for Msg4 may also need to be provided/determined. A current MCS (Modulation and Coding Scheme) field in the UL (uplink) grant for Msg3 of Figure 5 may not be large enough to provide the repetition factors and/or the location properly. As used herein, a repetition factor refers to a number of different time resources used to transmit a message, and location refers to a time/frequency resource used to transmit a message. For example, the location may refer to a time and frequency resource(s) used to transmit one repetition of a message, and the repetition factor may refer to a number of subframes over which the message is transmitted/retransmitted.

According to some embodiments of inventive concepts, UL grant contents for Msg3 may be modified for MTC wireless terminals UE-a and UE-g in a way that the message size does not need to be extended and the same MAC RAR format can be reused for coverage enhanced and/or low complexity Rel-13 UEs. A portion(s) of the current message fields may be reused by indicating a repetition factor for Msg3. Also, a location (narrowband) of the Msg3 transmission may be included in the UL grant. Additionally, a location and repetition factor for the control channel (e.g., M-PDCCH) for Msg4 may be included in the UL grant.

According to some embodiments of inventive concepts, a general structure/format of the MAC (Medium Access Control) RAR (Random Access Response) may not need to be changed for MTC wireless devices, and the UL grant size may not need to be extended. Instead, the UL grant field of the RAR may be used differently for MTC wireless devices without significantly changing the general structure/format of the RAR. The base station may thus have flexibility to indicate a time domain configuration and a frequency domain configuration for Msg3 via RAR.

The time domain configuration may include a repetition factor for Message 3 (of operation 403). Here the 'repetition' refers to repeatedly transmitting code bits of a given transport block (TB). In one embodiment, the 'repetition' may be simple repetition of the same code bits. Alternatively, the 'repetition' may be transmitting several, different, sets of code bits associated with the given transport block.

The time domain configuration may further include a transmission time interval (TTI) field for Message 3 transmission on the uplink. The TTI field contains information about the number of UL subframes that a set of code bits of a TB is mapped to. In one alternative (as in legacy LTE system), a TTI is one subframe, i.e., 1 millisecond. In another alternative (as in narrowband IoT system), a TTI (i.e., an extended TTI) is composed of multiple subframes. A typical value is, an extended TTI is composed of six subframes. If only two possible TTIs are defined in the system, then the TTI field can be 1 bit, for example, TTI field=0 indicates TTI of one subframes, TTI field=1 indicates TTI of six subframes. In general, if Q possible TTIs are defined in the system, then the TTI field is composed of ceil(log2(Q)) bits.

Samsung Exhibit 1007, Page 10 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

The frequency domain configuration may include a resource block assignment that indicates PRB resources for Message 3 uplink transmission, wherein the resource block assignment includes (a) an UL narrowband index and (b) a set of PRB pairs within the narrowband. The frequency domain configuration may further include a frequency hopping configuration of the Message 3 uplink transmission.

In one embodiment, the time domain configuration provided by RAR contains a repetition factor for Msg3 (and/or time/frequency location of Msg3), and the repetition factor for the control channel scheduling (e.g. M-PDCCH) the possible retransmissions of Msg3 during random access procedures for MTC wireless terminals. A control channel location and repetition factor may also be provided for Message 4 so that Message 4 can be scheduled. This can be understood as initializing a UE-specific search space for control channels.

Before sending Message 3 (of operation 403) during a random access procedure, an MTC wireless terminal UE has transmitted at least the PRACH preamble (operation 401) and received the RAR (operation 404) from the base station BS. The repetition factor for the PRACH preamble may depend on the UE coverage level, but the RAR repetition factor may be based on the used PRACH resources. For example, an MTC wireless terminal may determine its coverage level based on an estimation of downlink signaling from the base station, and an MTC wireless terminal may select a PRACH resource based on the determined coverage level. According to some embodiments, a first set of random access preambles may be associated with a first coverage level (e.g., for a medium quality DL channel) indicating a first repetition factor (e.g., for a relatively low number of repetitions), and a second set of random access preambles may be associated with a second coverage level (e.g., for poor quality DL channel) indicating a second repetition factor (e.g., for a relatively high number of repetitions).

According to some embodiments of inventive concepts, the following information elements may be included in the UL grant in RAR for an MTC wireless terminal:

Element 1. Time domain configuration for PUSCH carrying Msg3,
Element 2. Frequency domain configuration for PUSCH carrying Msg3,
Element 3. Time domain configuration for control channel (e.g., M-PDCCH) for Msg4,
Element 4. Frequency domain configuration for control channel for Msg4.

The following sections provide examples of possible implementations of the above Elements 1-4 in the UL grant in RAR for an MTC wireless terminal.

As noted above, Element 1 may contain a repetition factor for PUSCH (Physical Uplink Shared Channel) carrying Msg3. If N bits are used, then 2^N distinct levels of repetition factors could be configured.

According to some embodiments with Element 1 (Option 1 for Element 1), the levels of repetition factors may be offsets with reference to a number of repetitions of another channel or signal. The offset sizes can be a function of CE (coverage enhancement) level (also referred to as a coverage level). In alternative embodiments, offset calculations may be the same for all coverage levels. Examples a, b, and c for Message 3 repetition factors are discussed below.

Samsung Exhibit 1007, Page 11 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

a. In one example, the offsets for a Message 3 repetition factor may be offsets with reference to a number of repetitions of a PRACH preamble sequence (also referred to as a random access preamble). As discussed above, an MTC wireless terminal may select a PRACH preamble sequence based on DL channel quality, one set of preamble sequences may be associated with a first number of repetitions of the sequence, and a second set of preamble sequences may be associated with a second number of repetitions of the sequence. For example, if N=2 (2 bits), 2^2=4 repetition offsets may be provided relative to a repetition level of the PRACH Random Access Preamble. The offset sizes can be a function of CE (coverage enhancement) level. For example, for 5 dB ≤ CE < 10 dB (for a low quality DL channel), the offsets may be {-8, -4, 4, 8} to be subtracted from or added to the random access preamble repetition factor. For 10 dB ≤ CE < 15 dB (for a lower quality DL channel), the offsets may be {-16, -8, 8, 16} to be subtracted from or added to the random access preamble repetition factor. For 15 dB ≤ CE (for a lowest quality DL channel), the offsets may be {-32, -16, 16, 32} to be subtracted from or added to the random access preamble repetition factor.
b. In another example, the offsets may be offsets with reference to a number of repetitions of M-PDCCH for the RAR transmission.
c. In another example, the offsets may be offsets with reference to a number of repetitions of PDSCH (Physical Downlink Shared Channel) carrying the RAR transmission.

According to some other embodiments with Element 1 (Option 2 for Element 1), a set of PUSCH repetition levels may be defined for a given coverage enhancement level, with multiple different sets possible for multiple coverage levels. If N bits are used, then a set can contain 2^N distinct levels of repetition factors. Which set Element 1 points to may depend on the coverage enhancement (CE) level. As discussed above, coverage enhancement levels may be defined as: 5 dB ≤ CE < 10 dB for a low quality DL channel; 10 dB ≤ CE < 15 dB for a lower quality DL channel; and 15 dB ≤ CE (for a lowest quality DL channel). For a low quality DL channel (5 dB ≤ CE < 10 dB) with N=2, the Message 3 may be retransmitted a number of times equal to the repetition factor (e.g., 1, 2, 3, or 4 times). For a lower quality DL channel (10 dB ≤ CE < 15 dB) with N=2, the Message 3 may be retransmitted a number of times equal to the repetition factor plus N^2 (e.g., 5, 6, 7, or 8 times). For a lowest quality DL channel (15 dB ≤ CE) with N=2, the Message 3 may be retransmitted a number of times equal to the repetition factor plus $2N^2$ (e.g., 9, 10, 11, or 12 times). Stated in other words, with N=4, four different repetition factors are available, and the repetition factor may be used as an offset relative to a starting point based on the coverage enhancement level

According to still other embodiments with Element 1 (Option 3 for Element 1), the repetition factor may be directly signaled as a number (e.g., base 2). The numbers can be interpreted "normally" as consecutive numbers or having an offset or integer step between the repetition values. These embodiments may require more bits to be used (e.g., to signal 128 different levels 7 bits may be required). In one alternative, the signaled numbers may be interpreted differently depending on the current coverage enhancement level (as in step 1).

Element 1 may further contain a starting subframe among the set of UL subframes that carry the PUSCH.

Samsung Exhibit 1007, Page 12 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

Element 1 may further contain a transmission time interval (TTI) field for Message 3 transmission on the uplink. If the PUSCH Message 3 is configured with TTI=Q subframes and R repetitions, then one transmission of PUSCH Message 3 takes Q*R subframes.

As noted above, Element 2 is a frequency domain configuration for PUSCH for Msg3. The used narrowband (e.g., an identification of the 6 physical resource blocks PRBs in time and frequency within a subframe to be used) may be indicated first, and the location of PUSCH within that narrowband (e.g., which subset of the 6 PRBs) may be indicated second. Examples a and b are discussed below:

a. The narrowband index may be signaled with log2(floor(100/6)) = 4 bits, when narrowband size is 6 physical resource blocks (PRB) in a system with a maximum of UL system BW bandwidth of 100 PRBs.

b. If full resource allocation flexibility is allowed, this may need $b = \left\lceil \log_2\left(N_{\mathrm{RB}}^{\mathrm{UL}} \cdot \left(N_{\mathrm{RB}}^{\mathrm{UL}}+1\right)/2\right)\right\rceil$ =ceil(log2 (6*7/2)) = 5 bits. If unnecessary resource allocation flexibility (e.g., only allow PUSCH occupying {1,2,3,6} PRBs, i.e., remove {4,5} PRBs) is removed, however, then this part may be reduced to 4 bits. Stated in other words, full resource allocation for {1,2,3,4,5,6} PRBs may allow selection of 1 out of 6 PRBs, 2 out of 6 PRBs, 3 out of 6 PRBs, 4 out of 6 PRBs, 5 out of 6 PRBs, or 6 out of 6 PRBs. The reduced selection for {1,2,3,6} PRBs may allow selection of 1 out of 6 PRBs, 2 out of 6 PRBs, 3 out of 6 PRBs, or 6 out of 6 PRBs.

As noted above, Element 3 is a time domain configuration for a control channel (e.g. M-PDCCH) for Msg4.

According to some embodiments with Element 3 (Option 1 for Element 3), Element 3 can be 0 bits if M-PDCCH for Msg4 reuses a repetition factor of another channel (such as PRACH preamble, RAR, or M-PDCCH of RAR). This may leave M bits for some other fields. For example, M=2 bits for TPC (Transmit Power Control) command. Examples a and b are discussed below:

a. For example, M-PDCCH for Msg4 may be defined to reuse the actual number of repetitions as M-PDCCH of RAR. In this case, blind decoding of R (a number of subframes over which Message 4 is transmitted/retransmitted) may not be necessary.

b. In another example, the (L, R) search space configuration of M-PDCCH for Msg4 may be defined to reuse the same (L, R) search space configuration as M-PDCCH of RAR. In this case, the set of possible R values may be reused, but blind decoding may still be necessary for the UE to know which R value is actually used. Here, L represents the ECCE (Enhanced Control Channel Element) aggregation level of M-PDCCH, and R represents the number of repetitions across subframes. A set of (L, R) is associated with a search space configuration of an M-PDCCH. Stated in other words, L represents a time/frequency resource(s) within a subframe for M-PDCCH for Message 4, and R represents a number of subframes over which M-PDCCH for Message 4 is transmitted/retransmitted.

Samsung Exhibit 1007, Page 13 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

According to some other embodiments with Element 3 (option 2 for Element 3), Element 3 may take M bits so that no reuse is necessary. Similar to Element 1, multiple options exist for Element 3 as discussed below:

a. In one example, Element 3 takes M bits, providing 2^M repetition offsets relative to the actual number of repetitions used for M-PDCCH of RAR. In this case, the R value is provided via Element 1 without ambiguity, and no blind decoding of R is necessary.

b. In another example, a set of M-PDCCH repetition levels are defined for a given coverage enhancement level, with multiple different sets possible for multiple coverage levels. A typical case is 4 different sets of R values is defined for 4 different CE levels, respectively, with the CE levels corresponding to 0 dB (e.g., 0dB ≤ CE < 5dB), 5dB (e.g., 5dB ≤ CE < 10dB), 10dB (e.g., 10dB ≤ CE < 15dB), and 15 dB (e.g., 15dB ≤ CE) (or another similar set) of coverage enhancement. In this case, the set of possible R values may be indicated via Element 3 (2 bits) among 4 sets, but blind decoding may still be necessary for the UE to know which R value is actually used within the indicated set. The 4 sets that Element 3 index into may not be explicitly defined for M-PDCCH of Msg4. For example, the same sets defined for common search space can be reused here. The number of different R values within a given set may vary with CE level.

c. In another example, the repetition factor is determined as in options 2 and 3 for Element 1.

As noted above, Element 4 is a frequency domain configuration for the control channel for Msg4.

According to some embodiments with Element 4, Element 4 can be just the DL (downlink) narrowband index (i.e., without Physical Resource Block PRB location information within the DL narrowband). This may be possible when assuming that the PRB set for M-PDCCH is always a fixed number of PRBs (e.g., all of the 6 PRBs in a narrowband). Similar to Element 2, Element 4 could take P = log2 floor(100/6) = 4 bits. Note that there are usually multiple M-PDCCH candidates of varying aggregation levels, so the actual M-PDCCH may not use all resource elements in the 6 PRB, and two or more M-PDCCHs may multiplex over the same set of PRB pairs.

With the examples discussed above, Elements 1-4 may take 14-16 bits, and this may leave 4-6 bits for remaining information in the UL grant (e.g., for modulation and coding scheme MCS). For coverage enhanced operation according to some embodiments, it is likely that no other information would be needed.

It should be noted that the numbers in embodiments discussed above are provided as examples. Moreover, the sizes of the fields may be modified to increase, for example, the number of possible repetition offsets, if there is room in the UL grant. The total size of the UL grant may be limited to no more than 20 bits, however, to keep it compatible with the current MAC RAR format.

As Msg4 is scheduled as a normal UE-specific downlink transmission, Elements 3 and 4 above can be understood as information initializing the UE-specific search space for M-PDCCH. This may be a significant step as otherwise the UE may not know how to find the M-PDCCH

Samsung Exhibit 1007, Page 14 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

and thus the scheduling information (e.g. location, repetitions) for Msg4. UE-specific search space information provided by Elements 3 and 4 can be used for subsequent M-PDCCH transmission until more detailed M-PDCCH configuration is provided via RRC signaling.

If possible, Msg3 HARQ (Hybrid Automatic Repeat Request) retransmissions may be scheduled in the same way as normal uplink messages, the control channel time/frequency location and M-PDCCH repetition factor may need to be known. In one embodiment, this configuration may be the same as for Msg4 M-PDCCH (Elements 3 and 4).

In some embodiments, only parts of Elements 1-4 may be applied. For example, in some embodiments only Elements 3 and 4 are used to configure the UE-specific search space for M-PDCCH, and other information, such as Msg3 scheduling information, is determined through other means (e.g., through the used PRACH resource set). In another example, only Elements 1 and 2 are applied, but the M-PDCCH search space is configured through alternative means.

The above discussion refers to some embodiments where the MAC RAR message format is as shown in Figure 5. Stated in other words, the MAC RAR message format/size may be the same as and/or similar to MAC RAR message formats in the currently deployed systems. In further embodiments, the RAR message size may be changed.

If some parts/fields of the RAR message are left out or their size is reduced, then the total message size may be reduced. The message can be padded up to the size of the legacy message, or the message may be sent as a shorter message which may provide a further benefit of consuming less radio resources when transmitted. The message size may still be byte aligned, such that the total size is divisible by 8.

According to some embodiments, if a Temporary C-RNTI (Cell Radio Network Temporary Identifier) is not used at all, the RAR message may be 2 octets shorter. Either this message is sent as a shorter message, padded up to full size, or more bits are used for other parts of the message (e.g., using more bits for the UL grant part). According to some other embodiments, if some Elements provided above are left out, the UL grant and the total message size can be reduced.

In alternative embodiments, all or some of the Elements provided above may be included in the UL grant in the MAC RAR message format, but the MAC RAR message size may be larger (more than 6 octets for the message without MAC header(s)). In yet other embodiments, part(s) of the Elements may be included in the MAC RAR message, but not necessarily in the UL grant part of the message.

According to some embodiments disclosed herein, existing MAC RAR and UL grant formats may be used to determine/provide the scheduling information for Msg3 and Msg4 for bandwidth reduced low complexity and coverage enhanced UEs (ref. LTE Rel-13 MTC and coverage enhancements). The contents of the UL grant may be redefined to include information discussed above with a goal of keeping the MAC RAR size the same.

References:

Samsung Exhibit 1007, Page 15 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

[1] 3GPP TS 36.321, "Medium Access Control (MAC) protocol specification (Release 12)," V12.5.0, Mar 2015.

[2] 3GPP TS 36.331, "Radio Resource Control (RRC); Protocol Specification (Release 12)," V12.5.0, Mar 2015.

[3] 3GPP TS 36.213, "Physical layer procedures (Release 12)," V12.0.0, Dec 2013.

[4] 3GPP TS 26.211, "Physical channels and modulation (Release 12)," V12.0.0, Dec 2013.

[5] 3GPP TSG-RAN WG2 #91, "Random Access For Rel-13 Low Complexity And Enhanced Coverage UEs," Beijing, P.R. China, 24th – 28th August 2015.

Example Embodiments:

1. A method of operating a wireless terminal (UE-a), the method comprising:

transmitting a random access preamble of a random access procedure from the wireless terminal (UE-a) to a node (BS-a) of a radio access network, RAN; and

after transmitting the random access preamble, receiving a random access response, RAR, of the random access procedure from the node (BS-a) of the radio access network, wherein the random access response includes an Uplink, UL, grant for a Message 3 uplink communication of the random access procedure, wherein the UL grant includes

a time domain configuration associated with the Message 3 uplink communication, wherein the time domain configuration includes (a) a repetition factor that defines a number of repetitions across subframes for the Message 3 uplink communication, and/or (b) Transmission Time Interval, TTI, information for the Message 3 uplink communication.

2. The method of Embodiment 1, wherein the UL grant further includes a frequency domain configuration associated with the Message 3 uplink communication, wherein the frequency domain configuration includes,

a resource block assignment that indicates Physical Resource Block, PRB, resources for the Message 3 uplink communication, wherein the resource block assignment includes (a) an UL narrowband index and (b) a set of PRB pairs within the narrowband, and/or

a frequency hopping configuration of the Message 3 uplink communication.

3. The method of any of Embodiments 1-2, wherein the random access response further includes a repetition factor associated with a Message 4 downlink communication of the random access procedure wherein the repetition factor is used to define a number of repetitions associated with the Message 4 downlink communication.

Samsung Exhibit 1007, Page 16 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

4. The method of any of Embodiments 1-3 wherein the random access response includes the repetition factor for the Message 3 uplink communication of the random access procedure, the method further comprising:

providing a number of repeated transmissions of the Message 3 uplink communication from the wireless terminal (UE-a) to the node (BS-a) of the radio access network wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication.

5. The method of Embodiment 4 wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication and a number of repeated transmissions of the random access preamble.

6. The method of Embodiment 4 wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication and a coverage enhancement level of a downlink channel from the node (BS-a) to the wireless terminal (UE-a).

7. The method of Embodiment 6 further comprising:

determining the coverage enhancement level of the downlink channel based on downlink transmissions received from the node (BS-a).

8. The method of Embodiment 4 wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication and a number of repeated transmissions of the random access response and/or based on the repetition factor for the Message 3 uplink communication and a number of repeated transmissions of control information for the random access response.

9. The method of any of Embodiments 4-8 wherein the Message 3 uplink transmission includes a Radio Resource Control (RRC) connection request.

10. The method of any of Embodiments 4-9 wherein the Message 3 uplink transmission is transmitted over a physical uplink shared channel (PUSCH).

11. The method of any of Embodiments 1-8 wherein the random access response includes a repetition factor associated with a Message 4 downlink communication which is used to define a number of repetitions of control information associated with the Message 4 downlink communication, the method further comprising:

receiving control information associated with a Message 4 downlink communication based on the repetition factor associated with the Message 4 downlink communication; and

receiving the Message 4 downlink communication from the node (BS-a) using the control information.

12. The method of Embodiment 11 wherein the number of repeated transmissions is based on the repetition factor associated with the Message 4 downlink communication and a number of repeated transmissions of the random access preamble.

Samsung Exhibit 1007, Page 17 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

13. The method of Embodiment 11 wherein the number of repeated transmissions is based on the repetition factor associated with the Message 4 downlink communication and a coverage enhancement level of a downlink channel from the node (BS-a) to the wireless terminal (UE-a).

14. The method of Embodiment 13 further comprising:
determining the coverage enhancement level of the downlink channel based on downlink transmissions received from the node (BS-a).

15. The method of Embodiment 11 wherein the number of repeated transmissions is based on the repetition factor associated with the Message 4 downlink communication and a number of repeated transmissions of the random access response and/or based on the repetition factor for the Message 4 downlink communication and a number of repeated transmissions of control information for the random access response.

16. The method of any of Embodiments 11-15 wherein the control information associated with the Message 4 downlink communication is received over a physical downlink control channel, and wherein the Message 4 downlink communication is received over a physical downlink shared channel.

17. The method of any of Embodiments 11-16 wherein the Message 4 downlink communication includes a contention resolution message and/or an uplink grant for a subsequent uplink communication.

18. The method of any of Embodiments 1-17 wherein the random access response includes information defining a time and/or frequency location associated with the Message 3 uplink communication, the method further comprising:
providing transmission of the Message 3 uplink communication based on the information defining the time and/or frequency location from the random access response.

19. The method of Embodiment 18 wherein information defining the time and/or frequency location defines a time and/or frequency location in a subframe for the Message 3 uplink communication.

20. The method of Embodiment 19 wherein the information defining the time and/or frequency location defines one or more of the following:
(a) a starting subframe among a set of subframes that carries the Message 3 uplink transmission;
(b) a number of repetitions across subframes for carrying the Message 3 uplink transmission;
(c) a frequency location in a subframe for the Message 3 uplink transmission, where the frequency location is provided by a narrowband index or a PRB pair index;
(d) a number of PRB pairs occupied by the Message 3 uplink transmission;
(e) a resource block allocation information of the Message 3 uplink transmission;
(f) a frequency hopping configuration of the Message 3 uplink transmission.

Samsung Exhibit 1007, Page 18 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

21. The method of any of Embodiments 1-20 wherein the random access response includes a configuration information of a control channel for a Message 4 downlink communication, the method further comprising:

receiving the control channel associated with the Message 4 downlink communication based on the configuration information; and

receiving the Message 4 downlink communication from the node (BS-a) based on the control channel.

22. The method of Embodiment 21 wherein the configuration information includes a time and/or frequency resource definition that provides one or more of the following:

(a) a starting subframe among a set of subframes that carries the control channel associated with the Message 4 downlink communication;

(b) a number of repetitions across subframes for carrying the control channel;

(c) a frequency location in a subframe for the control channel, where the frequency location is provided by a narrowband index or a PRB pair index;

(d) a number of PRB pairs that are used for the control channel;

(e) a resource block assignment information of the control channel; and/or

(f) a frequency hopping configuration of the control channel.

23. The method of Embodiment 22 wherein the configuration information further includes PUCCH resource offset information.

24. The method of any of Embodiments 1-22 wherein the random access response further includes a timing advance command and a temporary identification for the wireless terminal, and wherein the UL grant is included between the timing advance command and the temporary identification for the wireless terminal.

25. The method of Embodiment 24 wherein the random access response includes six octets, wherein the timing advance command is included in a portion of a first of the six octets and a portion of a second of the six octets, wherein the UL grant is included in a portion of the second of the six octets and in third and fourth octets of the six octets, and wherein the temporary identification for the wireless terminal is included in fifth and sixth octets of the six octets.

26. The method of any of Embodiments 1-25 wherein the random access response further includes a timing advance command, a temporary identification for the wireless terminal, and/or a modulation and coding scheme for the Message 3 uplink communication.

27. The method of any of Embodiments 1-26 wherein transmitting the random access preamble comprises transmitting the random access preamble via a physical random access channel (PRACH), and/or wherein receiving the random access response comprises receiving the random access response via a physical downlink shared channel (PDSCH).

28. A wireless terminal (UE-a), wherein the wireless terminal is adapted to perform according to any of Embodiments 1-27.

29. A wireless terminal (UE-a) comprising:

Samsung Exhibit 1007, Page 19 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

a transceiver (301-a) configured to provide wireless communication with a node (BS-a) of a radio access network, RAN; and

a processor (303-a) coupled with the transceiver, wherein the processor is configured to perform operations according to of any of Embodiments 1-27, and wherein the processor is configured to transmit and/or receive communications to/from the node (BS-a) through the transceiver (301-a).

30. A method of operating a node (BS-a) of a radio access network, RAN, the method comprising:

receiving a random access preamble of a random access procedure from the wireless terminal (UE-a); and

responsive to receiving the random access preamble, transmitting a random access response, RAR, of the random access procedure to the wireless terminal UE-a, wherein the random access response includes an uplink, UL, grant for a Message 3 uplink communication of the random access procedure, wherein the UL grant includes

a time domain configuration associated with the Message 3 uplink communication, wherein the time domain configuration includes (a) a repetition factor that defines a number of repetitions across subframes for the Message 3 UL communication, or (b) Transmission Time Interval, TTI, information for the Message 3 UL communication.

31. The method of Embodiment 30, wherein the UL grant further includes a frequency domain configuration associated with the Message 3 uplink communication, wherein the frequency domain configuration includes:

a resource block assignment that indicates Physical Resource Block, PRB, resources for the Message 3 uplink communication, wherein the resource block assignment includes (a) an UL narrowband index and (b) a set of PRB pairs within the narrowband; and/or

a frequency hopping configuration of the Message 3 uplink communication.

32. The method of any of Embodiments 30-31, wherein random access response further includes a repetition factor associated with a Message 4 downlink communication of the random access procedure wherein the repetition factor is used to define a number of repetitions associated with the Message 4 downlink communication.

33. The method of any of Embodiments 30-32 wherein the random access response includes the repetition factor for the Message 3 uplink communication of the random access procedure, the method further comprising:

receiving a number of repeated transmissions of the Message 3 uplink communication from the wireless terminal (UE-a) wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication.

34. The method of Embodiment 33 wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication and a number of repeated transmissions of the random access preamble.

Samsung Exhibit 1007, Page 20 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

35. The method of Embodiment 33 wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication and a coverage enhancement level of a downlink channel from the node (BS-a) to the wireless terminal (UE-a).

36. The method of Embodiment 33 wherein the number of repeated transmissions is based on the repetition factor for the Message 3 uplink communication and a number of repeated transmissions of the random access response and/or based on the repetition factor for the Message 3 uplink communication and a number of repeated transmissions of control information for the random access response.

37. The method of any of Embodiments 33-36 wherein the Message 3 uplink transmission includes a Radio Resource Control (RRC) connection request.

38. The method of any of Embodiments 33-37 wherein the Message 3 uplink transmission is transmitted over a physical uplink shared channel (PUSCH).

39. The method of any of Embodiments 33-38 wherein the random access response includes a repetition factor associated with a Message 4 downlink communication which is used to define a number of repetitions of control information associated with the Message 4 downlink communication, the method further comprising:

transmitting control information associated with a Message 4 downlink communication to the wireless terminal (UE-a) based on the repetition factor associated with the Message 4 downlink communication; and

transmitting the Message 4 downlink communication from the node (BS-a) to the wireless terminal (UE-a) using the control information.

40. The method of Embodiment 39 wherein the number of repeated transmissions is based on the repetition factor associated with the Message 4 downlink communication and a number of repeated transmissions of the random access preamble.

41. The method of Embodiment 39 wherein the number of repeated transmissions is based on the repetition factor associated with the Message 4 downlink communication and a coverage enhancement level of a downlink channel from the node (BS-a) to the wireless terminal (UE-a).

42. The method of Embodiment 39 wherein the number of repeated transmissions is based on the repetition factor associated with the Message 4 downlink communication and a number of repeated transmissions of the random access response and/or based on the repetition factor for the Message 4 downlink communication and a number of repeated transmissions of control information for the random access response.

43. The method of any of Embodiments 39-42 wherein the control information associated with the Message 4 downlink communication is transmitted over a physical downlink control channel, and wherein the Message 4 downlink communication is transmitted over a physical downlink shared channel.

Samsung Exhibit 1007, Page 21 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

44. The method of any of Embodiments 39-43 wherein the Message 4 downlink communication includes a contention resolution message and/or an uplink grant for a subsequent uplink communication.

45. The method of any of Embodiments 30-44 wherein the random access response includes information defining a time and/or frequency location associated with a Message 3 uplink communication, the method further comprising:

receiving a Message 3 uplink communication based on the information defining the time and/or frequency location from the random access response.

46. The method of Embodiment 45 wherein information defining the time and/or frequency location defines a time and/or frequency location in a subframe for the Message 3 uplink communication.

47. The method of any of Embodiments 46 wherein the information defining the time and/or frequency location defines one or more of the following:

(a) a starting subframe among a set of subframes that carries the Message 3 uplink transmission;

(b) a number of repetitions across subframes for carrying the Message 3 uplink transmission;

(c) a frequency location in a subframe for the Message 3 uplink transmission, where the frequency location is provided by a narrowband index or a PRB pair index;

(d) a number of PRB pairs occupied by the Message 3 uplink transmission;

(e) a resource block allocation information of the Message 3 uplink transmission; and/or

(f) a frequency hopping configuration of the Message 3 uplink transmission.

48. The method of any of Embodiments 30-47 wherein the random access response includes configuration information of a control channel for a Message 4 downlink communication, the method further comprising:

transmitting the control channel associated with the Message 4 downlink communication to the wireless terminal based on the configuration information; and

transmitting the Message 4 downlink communication to the wireless terminal (UE-a) based on the control channel.

49. The method of Embodiment 48 wherein the configuration information includes a time and/or frequency resource definition that provides one or more of the following:

(a) a starting subframe among a set of subframes that carries the control channel associated with the Message 4 downlink communication;

(b) a number of repetitions across subframes for carrying the control channel;

(c) a frequency location in a subframe for the control channel, where the frequency location is provided by a narrowband index or a PRB pair index;

(d) a number of PRB pairs that are used for the control channel;

(e) a resource block assignment information of the control channel; and/or

(f) a frequency hopping configuration of the control channel.

Samsung Exhibit 1007, Page 22 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

50. The method of any of Embodiments 49 wherein the configuration information further includes PUCCH resource offset information.

51. The method of any of Embodiments 30-50 wherein the random access response further includes a timing advance command and a temporary identification for the wireless terminal, and wherein the UL grant is included between the timing advance command and the temporary identification for the wireless terminal.

52. The method of Embodiment 51 wherein the random access response includes six octets, wherein the timing advance command is included in a portion of a first of the six octets and a portion of a second of the six octets, wherein the UL grant is included in a portion of the second of the six octets and in third and fourth octets of the six octets, and wherein the temporary identification for the wireless terminal is included in fifth and sixth octets of the six octets.

53. The method of any of Embodiments 30-52 wherein the random access response further includes a timing advance command, a temporary identification for the wireless terminal, and/or a modulation and coding scheme for the Message 3 uplink communication.

54. The method of any of Embodiments 30-53 wherein receiving the random access preamble comprises receiving the random access preamble via a physical random access channel (PRACH), and/or wherein transmitting the random access response comprises transmitting the random access response via a physical downlink shared channel (PDSCH).

55. A node (BS-a) of a radio access network, RAN, wherein the node (BS-a) is adapted to perform according to any of Embodiments 30-54.

56. A node (BS-a) of a wireless communication network, the node (BS-a) comprising:

a transceiver (201-a) configured to provide wireless communication with a plurality of wireless terminals (UEs) in a coverage area of the node (BS-a); and

a processor (203-a) coupled to the transceiver (201-a), wherein the processor is configured to perform operations according to any of Embodiments 30-54, and wherein the processor is configured to transmit and/or receive communications to/from wireless terminal (UE-a) through the transceiver (201-a).

Further Definitions:

When an element is referred to as being "connected", "coupled", "responsive", or variants thereof to another element, it can be directly connected, coupled, or responsive to the other element or one or more intervening elements may be present. In contrast, when an element is referred to as being "directly connected", "directly coupled", "directly responsive", or variants thereof to another element, there are no intervening elements present. Like numbers refer to like nodes/elements throughout. Furthermore, "coupled", "connected", "responsive", or variants thereof as used herein may include wirelessly coupled, connected, or responsive. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. Well-known functions or constructions may not be

described in detail for brevity and/or clarity. The term "and/or", abbreviated "/", includes any and all combinations of one or more of the associated listed items.

As used herein, the terms "comprise", "comprising", "comprises", "include", "including", "includes", "have", "has", "having", or variants thereof are open-ended, and include one or more stated features, integers, nodes, steps, components or functions but do not preclude the presence or addition of one or more other features, integers, nodes, steps, components, functions or groups thereof. Furthermore, as used herein, the common abbreviation "e.g.", which derives from the Latin phrase "exempli gratia," may be used to introduce or specify a general example or examples of a previously mentioned item, and is not intended to be limiting of such item. The common abbreviation "i.e.", which derives from the Latin phrase "id est," may be used to specify a particular item from a more general recitation.

It will be understood that although the terms first, second, third, etc. may be used herein to describe various elements/operations, these elements/operations should not be limited by these terms. These terms are only used to distinguish one element/operation from another element/operation. Thus a first element/operation in some embodiments could be termed a second element/operation in other embodiments without departing from the teachings of present inventive concepts. Examples of embodiments of aspects of present inventive concepts explained and illustrated herein include their complimentary counterparts. The same reference numerals or the same reference designators denote the same or similar elements throughout the specification.

Example embodiments are described herein with reference to block diagrams and/or flowchart illustrations of computer-implemented methods, apparatus (systems and/or devices) and/or computer program products. It is understood that a block of the block diagrams and/or flowchart illustrations, and combinations of blocks in the block diagrams and/or flowchart illustrations, can be implemented by computer program instructions that are performed by one or more computer circuits. These computer program instructions may be provided to a processor circuit (also referred to as a processor) of a general purpose computer circuit, special purpose computer circuit, and/or other programmable data processing circuit to produce a machine, such that the instructions, which execute via the processor of the computer and/or other programmable data processing apparatus, transform and control transistors, values stored in memory locations, and other hardware components within such circuitry to implement the functions/acts specified in the block diagrams and/or flowchart block or blocks, and thereby create means (functionality) and/or structure for implementing the functions/acts specified in the block diagrams and/or flowchart block(s).

These computer program instructions may also be stored in a tangible computer-readable medium that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable medium produce an article of manufacture including instructions which implement the functions/acts specified in the block diagrams and/or flowchart block or blocks.

A tangible, non-transitory computer-readable medium may include an electronic, magnetic, optical, electromagnetic, or semiconductor data storage system, apparatus, or device. More

Samsung Exhibit 1007, Page 24 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

specific examples of the computer-readable medium would include the following: a portable computer diskette, a random access memory (RAM) circuit, a read-only memory (ROM) circuit, an erasable programmable read-only memory (EPROM or Flash memory) circuit, a portable compact disc read-only memory (CD-ROM), and a portable digital video disc read-only memory (DVD/BlueRay).


The computer program instructions may also be loaded onto a computer and/or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer and/or other programmable apparatus to produce a computer-implemented process such that the instructions which execute on the computer or other programmable apparatus provide steps for implementing the functions/acts specified in the block diagrams and/or flowchart block or blocks. Accordingly, embodiments of present inventive concepts may be embodied in hardware and/or in software (including firmware, resident software, micro-code, etc.) that runs on a processor such as a digital signal processor, which may collectively be referred to as "circuitry," "a module" or variants thereof.

It should also be noted that in some alternate implementations, the functions/acts noted in the blocks may occur out of the order noted in the flowcharts. For example, two blocks shown in succession may in fact be executed substantially concurrently or the blocks may sometimes be executed in the reverse order, depending upon the functionality/acts involved. Moreover, the functionality of a given block of the flowcharts and/or block diagrams may be separated into multiple blocks and/or the functionality of two or more blocks of the flowcharts and/or block diagrams may be at least partially integrated. Finally, other blocks may be added/inserted between the blocks that are illustrated. Moreover, although some of the diagrams include arrows on communication paths to show a primary direction of communication, it is to be understood that communication may occur in the opposite direction to the depicted arrows.
Many different embodiments have been disclosed herein, in connection with the above description and the drawings. It will be understood that it would be unduly repetitious and obfuscating to literally describe and illustrate every combination and subcombination of these embodiments. Accordingly, the present specification, including the drawings, shall be construed to constitute a complete written description of various example combinations and subcombinations of embodiments and of the manner and process of making and using them, and shall support claims to any such combination or subcombination.

Other network elements, communication devices and/or methods according to embodiments of inventive concepts will be or become apparent to one with skill in the art upon review of the present drawings and description. It is intended that all such additional network elements, devices, and/or methods be included within this description, be within the scope of the present inventive concepts. Moreover, it is intended that all embodiments disclosed herein can be implemented separately or combined in any way and/or combination.

Samsung Exhibit 1007, Page 25 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

Figure 1

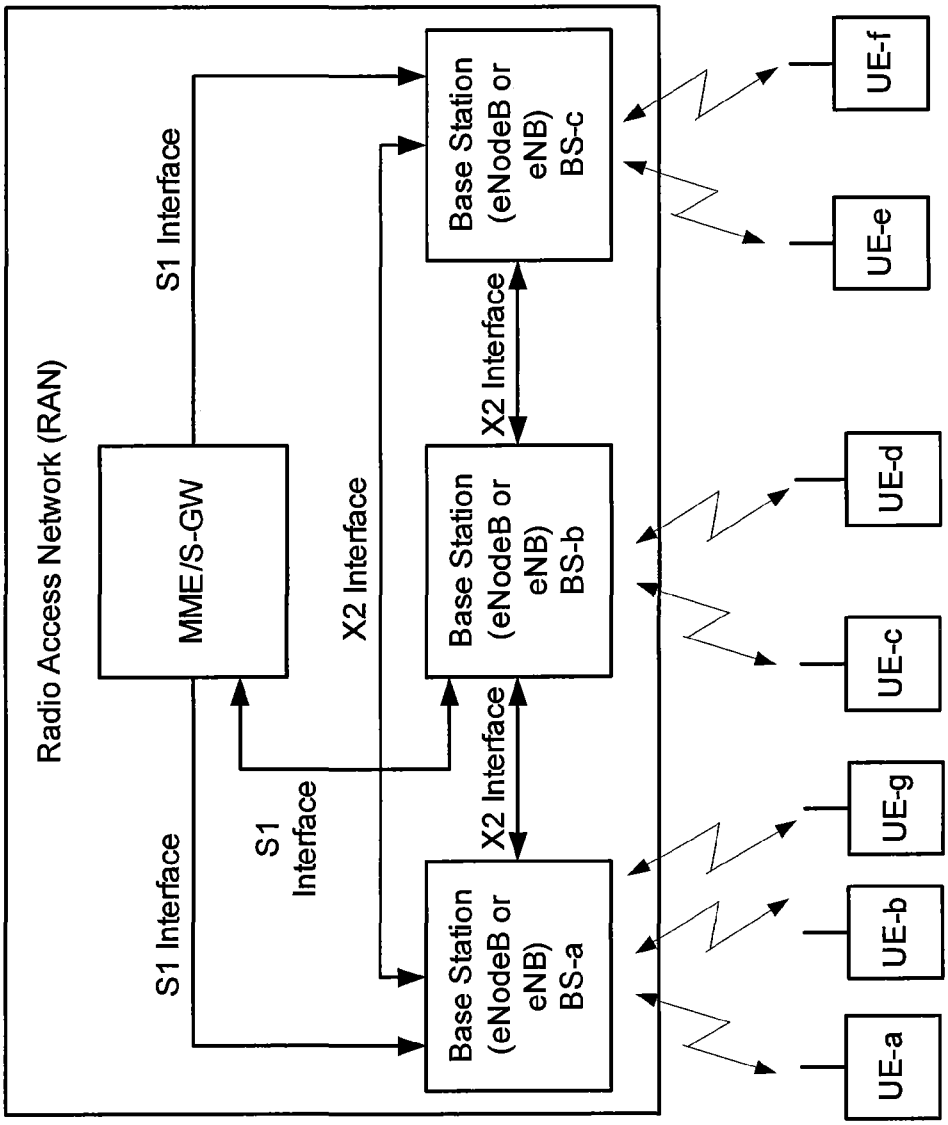

Samsung Exhibit 1007, Page 26 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

Figure 2


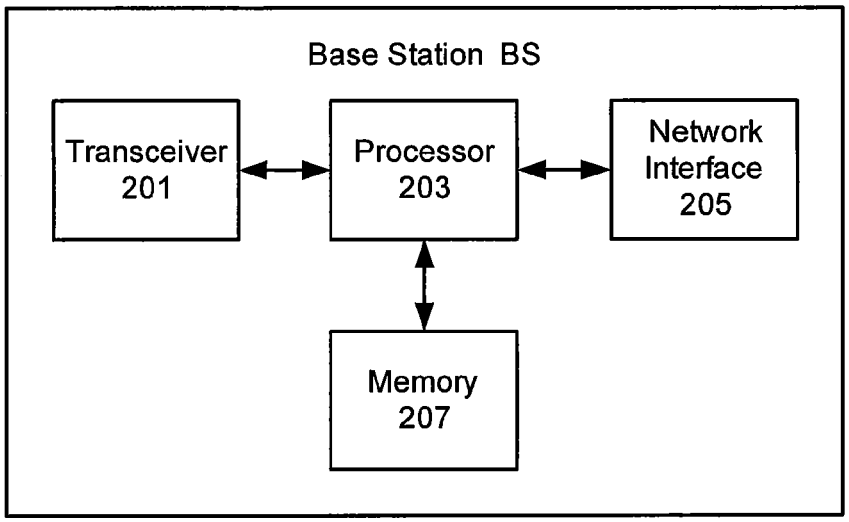


Figure 3

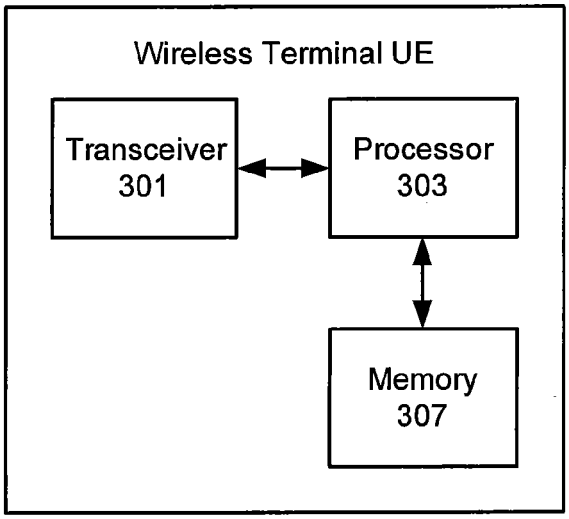

Samsung Exhibit 1007, Page 27 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

Figure 4


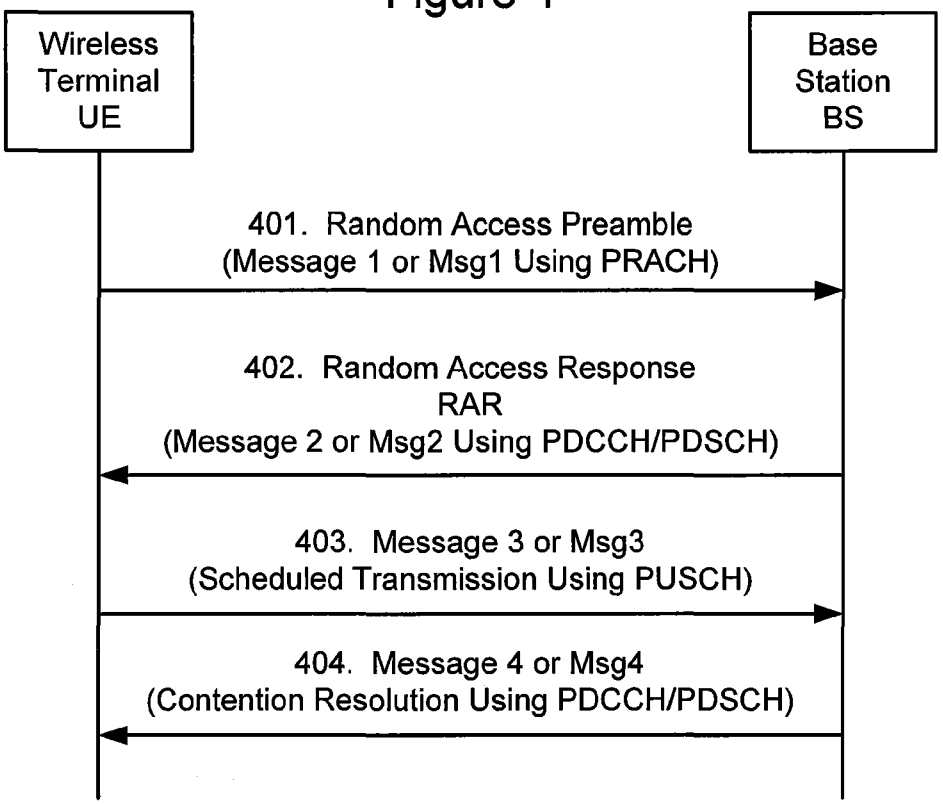


Figure 5

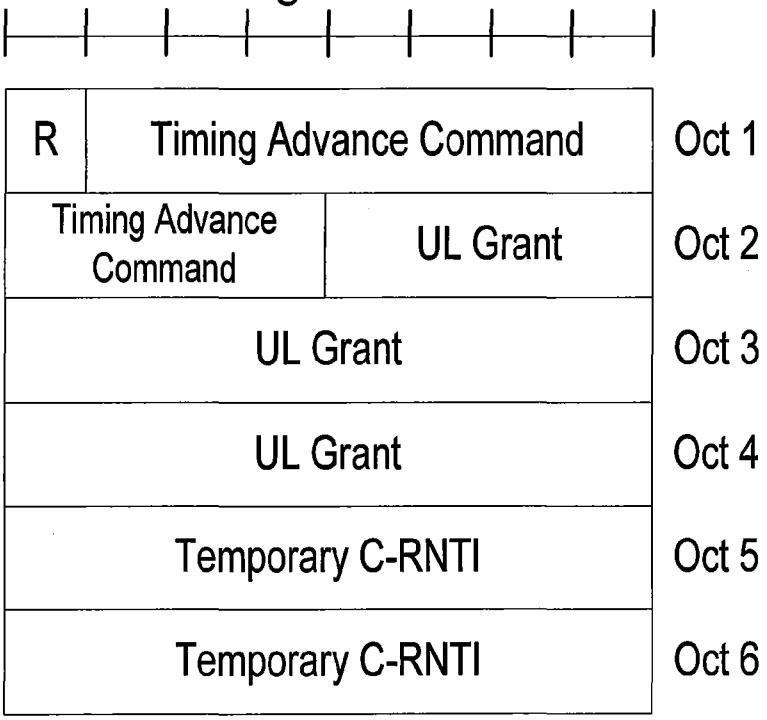

Samsung Exhibit 1007, Page 28 of 38
Samsung Electronics Co., Ltd. v. Asus Technology Licensing Inc.
IPR2024-01036

PTO/AIA/14 (12-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	P48140_US1
	Application Number	
Title of Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS	

The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76.
This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.

Secrecy Order 37 CFR 5.2

☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Inventor Information:

Inventor 1 Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	Tuomas		TIRRONEN	

Residence Information (Select One) ○ US Residency ◉ Non US Residency ○ Active US Military Service

City	Helsinki	Country of Residence i	FI

Mailing Address of Inventor:

Address 1	Savitaipaleentie 9B		
Address 2			
City	Helsinki	**State/Province**	
Postal Code	00950	**Country** i	FI

Inventor 2 Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	Johan		BERGMAN	

Residence Information (Select One) ○ US Residency ◉ Non US Residency ○ Active US Military Service

City	Stockholm	Country of Residence i	SE

Mailing Address of Inventor:

Address 1	Kungsholmsgatan 9		
Address 2			
City	Stockholm	**State/Province**	
Postal Code	SE-112 27	**Country** i	SE

Inventor 3 Remove

Legal Name

PTO/AIA/14 (12-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	P48140_US1
	Application Number	
Title of Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS	

Prefix	Given Name	Middle Name	Family Name	Suffix
	Yufei		BLANKENSHIP	

Residence Information (Select One) (•) US Residency ( ) Non US Residency ( ) Active US Military Service

City	Kildeer	State/Province	IL	Country of Residence i	US

Mailing Address of Inventor:

Address 1	21910 W. Pine Lake Circle
Address 2	

City	Kildeer	State/Province	IL
Postal Code	60047	Country i	US

Inventor 4 Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	Emre		YAVUZ	

Residence Information (Select One) ( ) US Residency (•) Non US Residency ( ) Active US Military Service

City	Stockholm	Country of Residence i	SE

Mailing Address of Inventor:

Address 1	c/o Cavdar, Anders Reimers vag 6
Address 2	

City	Stockholm	State/Province	
Postal Code	SE-11750	Country i	SE

All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the **Add** button. Add

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).

☐ **An Address is being provided for the correspondence Information of this application.**

Customer Number	20792		
Email Address	instructions@myersbigel.com	Add Email	Remove Email

PTO/AIA/14 (12-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	P48140_US1
	Application Number	
Title of Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS	

Application Information:

Title of the Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS		
Attorney Docket Number	P48140_US1	**Small Entity Status Claimed** ☐	
Application Type	Provisional		
Subject Matter	Utility		
Total Number of Drawing Sheets (if any)	3	**Suggested Figure for Publication (if any)**	

Filing By Reference :

Only complete this section when filing an application by reference under 35 U.S.C. 111(c) and 37 CFR 1.57(a). Do not complete this section if application papers including a specification and any drawings are being filed. Any domestic benefit or foreign priority information must be provided in the appropriate section(s) below (i.e., "Domestic Benefit/National Stage Information" and "Foreign Priority Information").

For the purposes of a filing date under 37 CFR 1.53(b), the description and any drawings of the present application are replaced by this reference to the previously filed application, subject to conditions and requirements of 37 CFR 1.57(a).

Application number of the previously filed application	Filing date (YYYY-MM-DD)	Intellectual Property Authority or Country

Publication Information:

☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)

☐ **Request Not to Publish.** I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application **has not and will not** be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32).
Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.

Please Select One:	◉ Customer Number	○ US Patent Practitioner	○ Limited Recognition (37 CFR 11.9)
Customer Number	20792		

PTO/AIA/14 (12-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	P48140_US1
	Application Number	
Title of Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS	

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78.
When referring to the current application, please leave the application number blank.

Prior Application Status		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)

Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the **Add** button.

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(d). When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX)[i] the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(h)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

Remove

Application Number	Country[i]	Filing Date (YYYY-MM-DD)	Access Code[i] (if applicable)

Additional Foreign Priority Data may be generated within this form by selecting the **Add** button.

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013.
NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

PTO/AIA/14 (12-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	P48140_US1
	Application Number	
Title of Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS	

Authorization to Permit Access:

☒ Authorization to Permit Access to the Instant Application by the Participating Offices

If checked, the undersigned hereby grants the USPTO authority to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the World Intellectual Property Office (WIPO), and any other intellectual property offices in which a foreign application claiming priority to the instant patent application is filed access to the instant patent application. See 37 CFR 1.14(c) and (h). This box should not be checked if the applicant does not wish the EPO, JPO, KIPO, WIPO, or other intellectual property office in which a foreign application claiming priority to the instant patent application is filed to have access to the instant patent application.

In accordance with 37 CFR 1.14(h)(3), access will be provided to a copy of the instant patent application with respect to: 1) the instant patent application-as-filed; 2) any foreign application to which the instant patent application claims priority under 35 U.S.C. 119(a)-(d) if a copy of the foreign application that satisfies the certified copy requirement of 37 CFR 1.55 has been filed in the instant patent application; and 3) any U.S. application-as-filed from which benefit is sought in the instant patent application.

In accordance with 37 CFR 1.14(c), access may be provided to information concerning the date o f filing this Authorization.

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Applicant 1

If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.

Clear

○ Assignee	○ Legal Representative under 35 U.S.C. 117	○ Joint Inventor
◉ Person to whom the inventor is obligated to assign.	○ Person who shows sufficient proprietary interest	

If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:

Name of the Deceased or Legally Incapacitated Inventor :

If the Applicant is an Organization check here. ☒

Organization Name	Telefonaktiebolaget L M Ericsson (publ)

PTO/AIA/14 (12-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	P48140_US1
	Application Number	
Title of Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS	

Mailing Address Information For Applicant:			
Address 1			
Address 2			
City	Stockholm	**State/Province**	
Country i	SE	Postal Code	SE-164 83
Phone Number		Fax Number	
Email Address			

Additional Applicant Data may be generated within this form by selecting the Add button.

Assignee Information including Non-Applicant Assignee Information:

Providing assignment information in this section does not subsitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Assignee 1

Complete this section if assignee information, including non-applicant assignee information, is desired to be included on the patent application publication . An assignee-applicant identified in the "Applicant Information" section will appear on the patent application publication as an applicant. For an assignee-applicant, complete this section only if identification as an assignee is also desired on the patent application publication.

If the Assignee or Non-Applicant Assignee is an Organization check here. ☐

Prefix	**Given Name**	Middle Name	**Family Name**	Suffix


Mailing Address Information For Assignee including Non-Applicant Assignee:			
Address 1			
Address 2			
City		**State/Province**	
Country i		Postal Code	
Phone Number		Fax Number	
Email Address			

Additional Assignee or Non-Applicant Assignee Data may be generated within this form by selecting the Add button.

PTO/AIA/14 (12-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	P48140_US1
	Application Number	
Title of Invention	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS	

Signature:

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications.					
Signature				Date (YYYY-MM-DD)	2015-09-25
First Name	Scott C.	Last Name	Hatfield	Registration Number	38176
Additional Signature may be generated within this form by selecting the Add button.					

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Electronic Acknowledgement Receipt

EFS ID:	23607214
Application Number:	62232743
International Application Number:	
Confirmation Number:	2973
Title of Invention:	SCHEDULING MESSAGES FOR COVERAGE ENHANCED AND/OR LOW COMPLEXITY WIRELESS TERMINALS
First Named Inventor/Applicant Name:	Tuomas TIRRONEN
Customer Number:	20792
Filer:	Scott C. Hatfield/Tracy Wallace
Filer Authorized By:	Scott C. Hatfield
Attorney Docket Number:	P48140_US1
Receipt Date:	25-SEP-2015
Filing Date:	
Time Stamp:	14:56:44
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	$260
RAM confirmation Number	1396
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Transmittal of New Application	P48140_US1_Application_Transmittal.pdf	182525 3503f3652be9920fff6c0354c25b00aa4af08d95	no	2
Warnings:					
Information:					
2	Specification	P48140_US1_Application.pdf	2849639 e025a72ab3aec2be6524116233507125436b716e	no	20
Warnings:					
Information:					
3	Drawings-only black and white line drawings	P48140_US1_Figures.pdf	149220 61abde7f1ed6de8f4709f49fb20d9c4391779ae9	no	3
Warnings:					
Information:					
4	Application Data Sheet	P48140_US1_ADS.pdf	713955 e8ech0adcf9aaa8a3fe9c2db27983fbe91374a0a	no	7
Warnings:					
Information:					
This is not an USPTO supplied ADS fillable form					
5	Fee Worksheet (SB06)	fee-info.pdf	30206 72cafe76869196759b5a6ef2912c2d67031e650c	no	2
Warnings:					
Information:					
		Total Files Size (in bytes):	3925545		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.