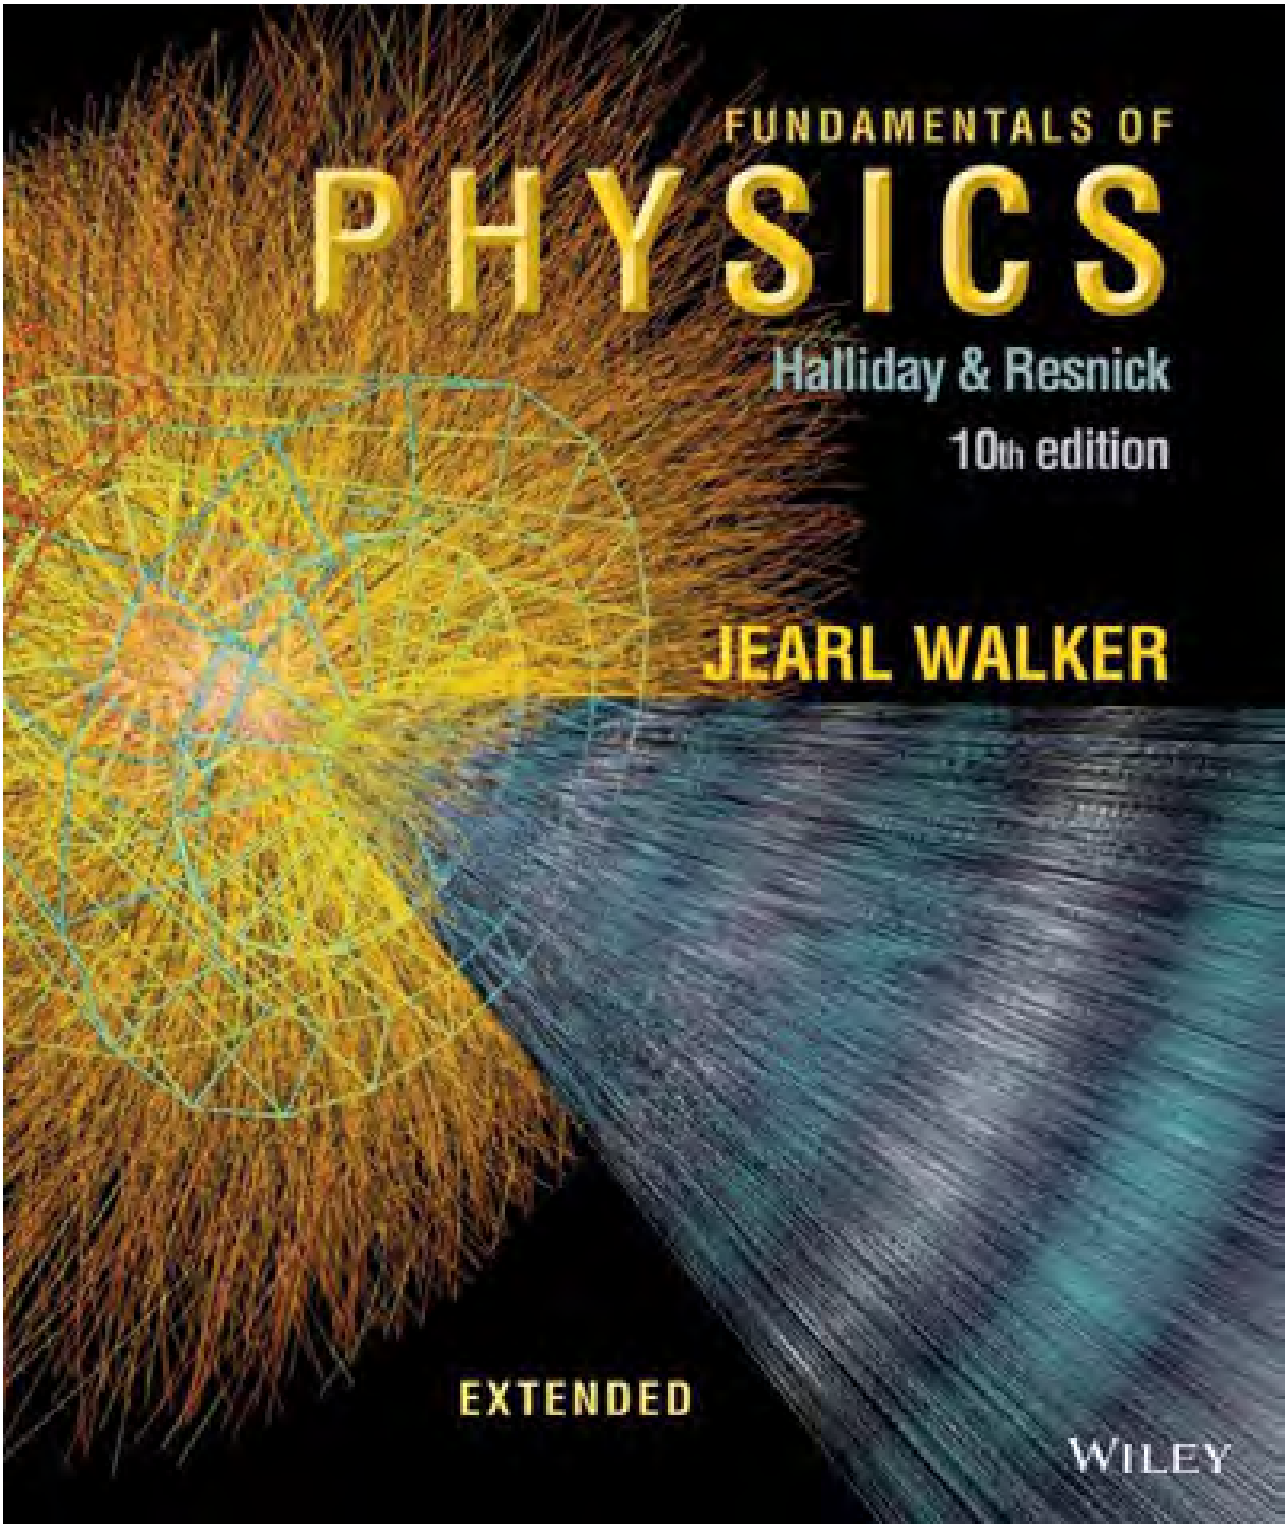
FUNDAMENTALS OF
PHYSICS
Halliday & Resnick
10th edition
JEARL WALKER
EXTENDED
WILEY

MATHEMATICAL FORMULAS*

Quadratic Formula

If $ax^2 + bx + c = 0$, then $x = \dfrac{-b \pm \sqrt{b^2 - 4ac}}{2a}$

Binomial Theorem

$$(1 + x)^n = 1 + \frac{nx}{1!} + \frac{n(n-1)x^2}{2!} + \cdots \qquad (x^2 < 1)$$

Products of Vectors

Let θ be the smaller of the two angles between $\vec{a}$ and $\vec{b}$. Then

$$\vec{a} \cdot \vec{b} = \vec{b} \cdot \vec{a} = a_x b_x + a_y b_y + a_z b_z = ab \cos\theta$$

$$\vec{a} \times \vec{b} = -\vec{b} \times \vec{a} = \begin{vmatrix} \hat{\mathrm{i}} & \hat{\mathrm{j}} & \hat{\mathrm{k}} \\ a_x & a_y & a_z \\ b_x & b_y & b_z \end{vmatrix}$$

$$= \hat{\mathrm{i}} \begin{vmatrix} a_y & a_z \\ b_y & b_z \end{vmatrix} - \hat{\mathrm{j}} \begin{vmatrix} a_x & a_z \\ b_x & b_z \end{vmatrix} + \hat{\mathrm{k}} \begin{vmatrix} a_x & a_y \\ b_x & b_y \end{vmatrix}$$

$$= (a_y b_z - b_y a_z)\hat{\mathrm{i}} + (a_z b_x - b_z a_x)\hat{\mathrm{j}} + (a_x b_y - b_x a_y)\hat{\mathrm{k}}$$

$$|\vec{a} \times \vec{b}| = ab \sin\theta$$

Trigonometric Identities

$$\sin\alpha \pm \sin\beta = 2 \sin\tfrac{1}{2}(\alpha \pm \beta) \cos\tfrac{1}{2}(\alpha \mp \beta)$$

$$\cos\alpha + \cos\beta = 2 \cos\tfrac{1}{2}(\alpha + \beta) \cos\tfrac{1}{2}(\alpha - \beta)$$

*See Appendix E for a more complete list.

Derivatives and Integrals

$$\frac{d}{dx} \sin x = \cos x \qquad \int \sin x\, dx = -\cos x$$

$$\frac{d}{dx} \cos x = -\sin x \qquad \int \cos x\, dx = \sin x$$

$$\frac{d}{dx} e^x = e^x \qquad \int e^x\, dx = e^x$$

$$\int \frac{dx}{\sqrt{x^2 + a^2}} = \ln(x + \sqrt{x^2 + a^2})$$

$$\int \frac{x\, dx}{(x^2 + a^2)^{3/2}} = -\frac{1}{(x^2 + a^2)^{1/2}}$$

$$\int \frac{dx}{(x^2 + a^2)^{3/2}} = \frac{x}{a^2(x^2 + a^2)^{1/2}}$$

Cramer's Rule

Two simultaneous equations in unknowns x and y,

$$a_1 x + b_1 y = c_1 \quad \text{and} \quad a_2 x + b_2 y = c_2,$$

have the solutions

$$x = \frac{\begin{vmatrix} c_1 & b_1 \\ c_2 & b_2 \end{vmatrix}}{\begin{vmatrix} a_1 & b_1 \\ a_2 & b_2 \end{vmatrix}} = \frac{c_1 b_2 - c_2 b_1}{a_1 b_2 - a_2 b_1}$$

and

$$y = \frac{\begin{vmatrix} a_1 & c_1 \\ a_2 & c_2 \end{vmatrix}}{\begin{vmatrix} a_1 & b_1 \\ a_2 & b_2 \end{vmatrix}} = \frac{a_1 c_2 - a_2 c_1}{a_1 b_2 - a_2 b_1}.$$

SI PREFIXES*

Factor	Prefix	Symbol	Factor	Prefix	Symbol
10^{24}	yotta	Y	10^{-1}	deci	d
10^{21}	zetta	Z	10^{-2}	centi	c
10^{18}	exa	E	10^{-3}	milli	m
10^{15}	peta	P	10^{-6}	micro	μ
10^{12}	tera	T	10^{-9}	nano	n
10^{9}	giga	G	10^{-12}	pico	p
10^{6}	mega	M	10^{-15}	femto	f
10^{3}	kilo	k	10^{-18}	atto	a
10^{2}	hecto	h	10^{-21}	zepto	z
10^{1}	deka	da	10^{-24}	yocto	y

*In all cases, the first syllable is accented, as in ná-no-mé-ter.

EXTENDED

FUNDAMENTALS OF PHYSICS

TENTH EDITION

IPR2024-01137
CamelBak EX 2023
Page 3 of 96

This page intentionally left blank

EXTENDED

Halliday & Resnick

FUNDAMENTALS OF PHYSICS

TENTH EDITION

JEARL WALKER
CLEVELAND STATE UNIVERSITY

WILEY

IPR2024-01137
CamelBak EX 2023
Page 5 of 96

EXECUTIVE EDITOR Stuart Johnson
SENIOR PRODUCT DESIGNER Geraldine Osnato
CONTENT EDITOR Alyson Rentrop
ASSOCIATE MARKETING DIRECTOR Christine Kushner
TEXT and COVER DESIGNER Madelyn Lesure
PAGE MAKE-UP Lee Goldstein
PHOTO EDITOR Jennifer Atkins
COPYEDITOR Helen Walden
PROOFREADER Lilian Brady
SENIOR PRODUCTION EDITOR Elizabeth Swain

COVER IMAGE © 2007 CERN

This book was set in 10/12 Times Ten by cMPreparé, CSR Francesca Monaco, and was printed and bound by Quad Graphics.The cover was printed by Quad Graphics.

This book is printed on acid free paper.

Copyright © 2014, 2011, 2008, 2005 John Wiley & Sons, Inc. All rights reserved.
No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise, except as permitted under Sections 107 or 108 of the 1976 United States Copyright Act, without either the prior written permission of the Publisher, or authorization through payment of the appropriate per-copy fee to the Copyright Clearance Center, Inc. 222 Rosewood Drive, Danvers, MA 01923, website www.copyright.com. Requests to the Publisher for permission should be addressed to the Permissions Department, John Wiley & Sons, Inc., 111 River Street, Hoboken, NJ 07030-5774, (201)748-6011, fax (201)748-6008, or online at http://www.wiley.com/go/permissions.

Evaluation copies are provided to qualified academics and professionals for review purposes only, for use in their courses during the next academic year.These copies are licensed and may not be sold or transferred to a third party. Upon completion of the review period, please return the evaluation copy to Wiley. Return instructions and a free of charge return shipping label are available at www.wiley.com/go/returnlabel. Outside of the United States, please contact your local representative.

Library of Congress Cataloging-in-Publication Data

Walker, Jearl
Fundamentals of physics / Jearl Walker, David Halliday, Robert Resnick—10th edition.
volumes cm
Includes index.
ISBN 978-1-118-23072-5 (Extended edition)
Binder-ready version ISBN 978-1-118-23061-9 (Extended edition)
1. Physics—Textbooks. I. Resnick, Robert. II. Halliday, David. III. Title.
QC21.3.H35 2014
530—dc23

2012035307

Printed in the United States of America
10 9 8 7 6 5 4 3 2 1

IPR2024-01137
CamelBak EX 2023
Page 6 of 96

BRIEF CONTENTS

VOLUME 1

1 Measurement
2 Motion Along a Straight Line
3 Vectors
4 Motion in Two and Three Dimensions
5 Force and Motion–I
6 Force and Motion–II
7 Kinetic Energy and Work
8 Potential Energy and Conservation of Energy
9 Center of Mass and Linear Momentum
10 Rotation
11 Rolling, Torque, and Angular Momentum
12 Equilibrium and Elasticity
13 Gravitation
14 Fluids
15 Oscillations
16 Waves–I
17 Waves–II
18 Temperature, Heat, and the First Law of Thermodynamics
19 The Kinetic Theory of Gases
20 Entropy and the Second Law of Thermodynamics

VOLUME 2

21 Coulomb's Law
22 Electric Fields
23 Gauss' Law
24 Electric Potential
25 Capacitance
26 Current and Resistance
27 Circuits
28 Magnetic Fields
29 Magnetic Fields Due to Currents
30 Induction and Inductance
31 Electromagnetic Oscillations and Alternating Current
32 Maxwell's Equations; Magnetism of Matter
33 Electromagnetic Waves
34 Images
35 Interference
36 Diffraction
37 Relativity
38 Photons and Matter Waves
39 More About Matter Waves
40 All About Atoms
41 Conduction of Electricity in Solids
42 Nuclear Physics
43 Energy from the Nucleus
44 Quarks, Leptons, and the Big Bang

Appendices / Answers to Checkpoints and Odd-Numbered Questions and Problems / Index

IPR2024-01137
CamelBak EX 2023
Page 7 of 96

CONTENTS

1 Measurement 1

1-1 MEASURING THINGS, INCLUDING LENGTHS 1
What Is Physics? 1
Measuring Things 1
The International System of Units 2
Changing Units 3
Length 3
Significant Figures and Decimal Places 4

1-2 TIME 5
Time 5

1-3 MASS 6
Mass 6

REVIEW & SUMMARY 8 PROBLEMS 8

2 Motion Along a Straight Line 13

2-1 POSITION, DISPLACEMENT, AND AVERAGE VELOCITY 13
What Is Physics? 13
Motion 14
Position and Displacement 14
Average Velocity and Average Speed 15

2-2 INSTANTANEOUS VELOCITY AND SPEED 18
Instantaneous Velocity and Speed 18

2-3 ACCELERATION 20
Acceleration 20

2-4 CONSTANT ACCELERATION 23
Constant Acceleration: A Special Case 23
Another Look at Constant Acceleration 26

2-5 FREE-FALL ACCELERATION 27
Free-Fall Acceleration 27

2-6 GRAPHICAL INTEGRATION IN MOTION ANALYSIS 29
Graphical Integration in Motion Analysis 29

REVIEW & SUMMARY 30 QUESTIONS 31 PROBLEMS 32

3 Vectors 40

3-1 VECTORS AND THEIR COMPONENTS 40
What Is Physics? 40
Vectors and Scalars 40
Adding Vectors Geometrically 41
Components of Vectors 42

3-2 UNIT VECTORS, ADDING VECTORS BY COMPONENTS 46
Unit Vectors 46
Adding Vectors by Components 46
Vectors and the Laws of Physics 47

3-3 MULTIPLYING VECTORS 50
Multiplying Vectors 50

REVIEW & SUMMARY 55 QUESTIONS 56 PROBLEMS 57

4 Motion in Two and Three Dimensions 62

4-1 POSITION AND DISPLACEMENT 62
What Is Physics? 62
Position and Displacement 63

4-2 AVERAGE VELOCITY AND INSTANTANEOUS VELOCITY 64
Average Velocity and Instantaneous Velocity 65

4-3 AVERAGE ACCELERATION AND INSTANTANEOUS ACCELERATION 67
Average Acceleration and Instantaneous Acceleration 68

4-4 PROJECTILE MOTION 70
Projectile Motion 70

4-5 UNIFORM CIRCULAR MOTION 76
Uniform Circular Motion 76

4-6 RELATIVE MOTION IN ONE DIMENSION 78
Relative Motion in One Dimension 78

4-7 RELATIVE MOTION IN TWO DIMENSIONS 80
Relative Motion in Two Dimensions 80

REVIEW & SUMMARY 81 QUESTIONS 82 PROBLEMS 84

5 Force and Motion—I 94

5-1 NEWTON'S FIRST AND SECOND LAWS 94
What Is Physics? 94
Newtonian Mechanics 95
Newton's First Law 95
Force 96
Mass 97
Newton's Second Law 98

5-2 SOME PARTICULAR FORCES 102
Some Particular Forces 102

5-3 APPLYING NEWTON'S LAWS 106
Newton's Third Law 106
Applying Newton's Laws 108

REVIEW & SUMMARY 114 QUESTIONS 114 PROBLEMS 116

IPR2024-01137
CamelBak EX 2023
Page 8 of 96

6 Force and Motion—II 124
6-1 FRICTION 124
What Is Physics? 124
Friction 124
Properties of Friction 127
6-2 THE DRAG FORCE AND TERMINAL SPEED 130
The Drag Force and Terminal Speed 130
6-3 UNIFORM CIRCULAR MOTION 133
Uniform Circular Motion 133
REVIEW & SUMMARY 138 QUESTIONS 139 PROBLEMS 140

7 Kinetic Energy and Work 149
7-1 KINETIC ENERGY 149
What Is Physics? 149
What Is Energy? 149
Kinetic Energy 150
7-2 WORK AND KINETIC ENERGY 151
Work 151
Work and Kinetic Energy 152
7-3 WORK DONE BY THE GRAVITATIONAL FORCE 155
Work Done by the Gravitational Force 156
7-4 WORK DONE BY A SPRING FORCE 159
Work Done by a Spring Force 159
7-5 WORK DONE BY A GENERAL VARIABLE FORCE 162
Work Done by a General Variable Force 162
7-6 POWER 166
Power 166
REVIEW & SUMMARY 168 QUESTIONS 169 PROBLEMS 170

8 Potential Energy and Conservation of Energy 177
8-1 POTENTIAL ENERGY 177
What Is Physics? 177
Work and Potential Energy 178
Path Independence of Conservative Forces 179
Determining Potential Energy Values 181
8-2 CONSERVATION OF MECHANICAL ENERGY 184
Conservation of Mechanical Energy 184
8-3 READING A POTENTIAL ENERGY CURVE 187
Reading a Potential Energy Curve 187
8-4 WORK DONE ON A SYSTEM BY AN EXTERNAL FORCE 191
Work Done on a System by an External Force 192
8-5 CONSERVATION OF ENERGY 195
Conservation of Energy 195
REVIEW & SUMMARY 199 QUESTIONS 200 PROBLEMS 202

9 Center of Mass and Linear Momentum 214
9-1 CENTER OF MASS 214
What Is Physics? 214
The Center of Mass 215
9-2 NEWTON'S SECOND LAW FOR A SYSTEM OF PARTICLES 220
Newton's Second Law for a System of Particles 220
9-3 LINEAR MOMENTUM 224
Linear Momentum 224
The Linear Momentum of a System of Particles 225
9-4 COLLISION AND IMPULSE 226
Collision and Impulse 226
9-5 CONSERVATION OF LINEAR MOMENTUM 230
Conservation of Linear Momentum 230
9-6 MOMENTUM AND KINETIC ENERGY IN COLLISIONS 233
Momentum and Kinetic Energy in Collisions 233
Inelastic Collisions in One Dimension 234
9-7 ELASTIC COLLISIONS IN ONE DIMENSION 237
Elastic Collisions in One Dimension 237
9-8 COLLISIONS IN TWO DIMENSIONS 240
Collisions in Two Dimensions 240
9-9 SYSTEMS WITH VARYING MASS: A ROCKET 241
Systems with Varying Mass: A Rocket 241
REVIEW & SUMMARY 243 QUESTIONS 245 PROBLEMS 246

10 Rotation 257
10-1 ROTATIONAL VARIABLES 257
What Is Physics? 258
Rotational Variables 259
Are Angular Quantities Vectors? 264
10-2 ROTATION WITH CONSTANT ANGULAR ACCELERATION 266
Rotation with Constant Angular Acceleration 266
10-3 RELATING THE LINEAR AND ANGULAR VARIABLES 268
Relating the Linear and Angular Variables 268

IPR2024-01137
CamelBak EX 2023
Page 9 of 96

10-4 KINETIC ENERGY OF ROTATION 271
Kinetic Energy of Rotation 271

10-5 CALCULATING THE ROTATIONAL INERTIA 273
Calculating the Rotational Inertia 273

10-6 TORQUE 277
Torque 278

10-7 NEWTON'S SECOND LAW FOR ROTATION 279
Newton's Second Law for Rotation 279

10-8 WORK AND ROTATIONAL KINETIC ENERGY 282
Work and Rotational Kinetic Energy 282
REVIEW & SUMMARY 285 QUESTIONS 286 PROBLEMS 287

11 Rolling, Torque, and Angular Momentum 295
11-1 ROLLING AS TRANSLATION AND ROTATION COMBINED 295
What Is Physics? 295
Rolling as Translation and Rotation Combined 295

11-2 FORCES AND KINETIC ENERGY OF ROLLING 298
The Kinetic Energy of Rolling 298
The Forces of Rolling 299

11-3 THE YO-YO 301
The Yo-Yo 302

11-4 TORQUE REVISITED 302
Torque Revisited 303

11-5 ANGULAR MOMENTUM 305
Angular Momentum 305

11-6 NEWTON'S SECOND LAW IN ANGULAR FORM 307
Newton's Second Law in Angular Form 307

11-7 ANGULAR MOMENTUM OF A RIGID BODY 310
The Angular Momentum of a System of Particles 310
The Angular Momentum of a Rigid Body Rotating About a Fixed Axis 311

11-8 CONSERVATION OF ANGULAR MOMENTUM 312
Conservation of Angular Momentum 312

11-9 PRECESSION OF A GYROSCOPE 317
Precession of a Gyroscope 317
REVIEW & SUMMARY 318 QUESTIONS 319 PROBLEMS 320

12 Equilibrium and Elasticity 327
12-1 EQUILIBRIUM 327
What Is Physics? 327
Equilibrium 327
The Requirements of Equilibrium 329
The Center of Gravity 330

12-2 SOME EXAMPLES OF STATIC EQUILIBRIUM 332
Some Examples of Static Equilibrium 332

12-3 ELASTICITY 338
Indeterminate Structures 338
Elasticity 339
REVIEW & SUMMARY 343 QUESTIONS 343 PROBLEMS 345

13 Gravitation 354
13-1 NEWTON'S LAW OF GRAVITATION 354
What Is Physics? 354
Newton's Law of Gravitation 355

13-2 GRAVITATION AND THE PRINCIPLE OF SUPERPOSITION 357
Gravitation and the Principle of Superposition 357

13-3 GRAVITATION NEAR EARTH'S SURFACE 359
Gravitation Near Earth's Surface 360

13-4 GRAVITATION INSIDE EARTH 362
Gravitation Inside Earth 363

13-5 GRAVITATIONAL POTENTIAL ENERGY 364
Gravitational Potential Energy 364

13-6 PLANETS AND SATELLITES: KEPLER'S LAWS 368
Planets and Satellites: Kepler's Laws 369

13-7 SATELLITES: ORBITS AND ENERGY 371
Satellites: Orbits and Energy 371

13-8 EINSTEIN AND GRAVITATION 374
Einstein and Gravitation 374
REVIEW & SUMMARY 376 QUESTIONS 377 PROBLEMS 378

14 Fluids 386
14-1 FLUIDS, DENSITY, AND PRESSURE 386
What Is Physics? 386
What Is a Fluid? 386
Density and Pressure 387

14-2 FLUIDS AT REST 388
Fluids at Rest 389

14-3 MEASURING PRESSURE 392
Measuring Pressure 392

IPR2024-01137
CamelBak EX 2023
Page 10 of 96

14-4 PASCAL'S PRINCIPLE 393
Pascal's Principle 393

14-5 ARCHIMEDES' PRINCIPLE 394
Archimedes' Principle 395

14-6 THE EQUATION OF CONTINUITY 398
Ideal Fluids in Motion 398
The Equation of Continuity 399

14-7 BERNOULLI'S EQUATION 401
Bernoulli's Equation 401
REVIEW & SUMMARY 405 QUESTIONS 405 PROBLEMS 406

15 Oscillations 413
15-1 SIMPLE HARMONIC MOTION 413
What Is Physics? 414
Simple Harmonic Motion 414
The Force Law for Simple Harmonic Motion 419

15-2 ENERGY IN SIMPLE HARMONIC MOTION 421
Energy in Simple Harmonic Motion 421

15-3 AN ANGULAR SIMPLE HARMONIC OSCILLATOR 423
An Angular Simple Harmonic Oscillator 423

15-4 PENDULUMS, CIRCULAR MOTION 424
Pendulums 425
Simple Harmonic Motion and Uniform Circular Motion 428

15-5 DAMPED SIMPLE HARMONIC MOTION 430
Damped Simple Harmonic Motion 430

15-6 FORCED OSCILLATIONS AND RESONANCE 432
Forced Oscillations and Resonance 432
REVIEW & SUMMARY 434 QUESTIONS 434 PROBLEMS 436

16 Waves—I 444
16-1 TRANSVERSE WAVES 444
What Is Physics? 445
Types of Waves 445
Transverse and Longitudinal Waves 445
Wavelength and Frequency 446
The Speed of a Traveling Wave 449

16-2 WAVE SPEED ON A STRETCHED STRING 452
Wave Speed on a Stretched String 452

16-3 ENERGY AND POWER OF A WAVE TRAVELING ALONG A STRING 454
Energy and Power of a Wave Traveling Along a String 454

16-4 THE WAVE EQUATION 456
The Wave Equation 456

16-5 INTERFERENCE OF WAVES 458
The Principle of Superposition for Waves 458
Interference of Waves 459

16-6 PHASORS 462
Phasors 462

16-7 STANDING WAVES AND RESONANCE 465
Standing Waves 465
Standing Waves and Resonance 467
REVIEW & SUMMARY 470 QUESTIONS 471 PROBLEMS 472

17 Waves—II 479
17-1 SPEED OF SOUND 479
What Is Physics? 479
Sound Waves 479
The Speed of Sound 480

17-2 TRAVELING SOUND WAVES 482
Traveling Sound Waves 482

17-3 INTERFERENCE 485
Interference 485

17-4 INTENSITY AND SOUND LEVEL 488
Intensity and Sound Level 489

17-5 SOURCES OF MUSICAL SOUND 492
Sources of Musical Sound 493

17-6 BEATS 496
Beats 497

17-7 THE DOPPLER EFFECT 498
The Doppler Effect 499

17-8 SUPERSONIC SPEEDS, SHOCK WAVES 503
Supersonic Speeds, Shock Waves 503
REVIEW & SUMMARY 504 QUESTIONS 505 PROBLEMS 506

18 Temperature, Heat, and the First Law of Thermodynamics 514
18-1 TEMPERATURE 514
What Is Physics? 514
Temperature 515
The Zeroth Law of Thermodynamics 515
Measuring Temperature 516

18-2 THE CELSIUS AND FAHRENHEIT SCALES 518
The Celsius and Fahrenheit Scales 518

IPR2024-01137
CamelBak EX 2023
Page 11 of 96

18-3 THERMAL EXPANSION 520
Thermal Expansion 520

18-4 ABSORPTION OF HEAT 522
Temperature and Heat 523
The Absorption of Heat by Solids and Liquids 524

18-5 THE FIRST LAW OF THERMODYNAMICS 528
A Closer Look at Heat and Work 528
The First Law of Thermodynamics 531
Some Special Cases of the First Law of Thermodynamics 532

18-6 HEAT TRANSFER MECHANISMS 534
Heat Transfer Mechanisms 534
REVIEW & SUMMARY 538 QUESTIONS 540 PROBLEMS 541

19 The Kinetic Theory of Gases 549
19-1 AVOGADRO'S NUMBER 549
What Is Physics? 549
Avogadro's Number 550

19-2 IDEAL GASES 550
Ideal Gases 551

19-3 PRESSURE, TEMPERATURE, AND RMS SPEED 554
Pressure, Temperature, and RMS Speed 554

19-4 TRANSLATIONAL KINETIC ENERGY 557
Translational Kinetic Energy 557

19-5 MEAN FREE PATH 558
Mean Free Path 558

19-6 THE DISTRIBUTION OF MOLECULAR SPEEDS 560
The Distribution of Molecular Speeds 561

19-7 THE MOLAR SPECIFIC HEATS OF AN IDEAL GAS 564
The Molar Specific Heats of an Ideal Gas 564

19-8 DEGREES OF FREEDOM AND MOLAR SPECIFIC HEATS 568
Degrees of Freedom and Molar Specific Heats 568
A Hint of Quantum Theory 570

19-9 THE ADIABATIC EXPANSION OF AN IDEAL GAS 571
The Adiabatic Expansion of an Ideal Gas 571
REVIEW & SUMMARY 575 QUESTIONS 576 PROBLEMS 577

20 Entropy and the Second Law of Thermodynamics 583
20-1 ENTROPY 583
What Is Physics? 584
Irreversible Processes and Entropy 584
Change in Entropy 585
The Second Law of Thermodynamics 588

20-2 ENTROPY IN THE REAL WORLD: ENGINES 590
Entropy in the Real World: Engines 590

20-3 REFRIGERATORS AND REAL ENGINES 595
Entropy in the Real World: Refrigerators 596
The Efficiencies of Real Engines 597

20-4 A STATISTICAL VIEW OF ENTROPY 598
A Statistical View of Entropy 598
REVIEW & SUMMARY 602 QUESTIONS 603 PROBLEMS 604

21 Coulomb's Law 609
21-1 COULOMB'S LAW 609
What Is Physics? 610
Electric Charge 610
Conductors and Insulators 612
Coulomb's Law 613

21-2 CHARGE IS QUANTIZED 619
Charge Is Quantized 619

21-3 CHARGE IS CONSERVED 621
Charge Is Conserved 621
REVIEW & SUMMARY 622 QUESTIONS 623 PROBLEMS 624

22 Electric Fields 630
22-1 THE ELECTRIC FIELD 630
What Is Physics? 630
The Electric Field 631
Electric Field Lines 631

22-2 THE ELECTRIC FIELD DUE TO A CHARGED PARTICLE 633
The Electric Field Due to a Point Charge 633

22-3 THE ELECTRIC FIELD DUE TO A DIPOLE 635
The Electric Field Due to an Electric Dipole 636

22-4 THE ELECTRIC FIELD DUE TO A LINE OF CHARGE 638
The Electric Field Due to Line of Charge 638

22-5 THE ELECTRIC FIELD DUE TO A CHARGED DISK 643
The Electric Field Due to a Charged Disk 643

22-6 A POINT CHARGE IN AN ELECTRIC FIELD 645
A Point Charge in an Electric Field 645

22-7 A DIPOLE IN AN ELECTRIC FIELD 647
A Dipole in an Electric Field 648
REVIEW & SUMMARY 650 QUESTIONS 651 PROBLEMS 652

IPR2024-01137
CamelBak EX 2023
Page 12 of 96

23 Gauss' Law 659

23-1 ELECTRIC FLUX 659
What Is Physics 659
Electric Flux 660

23-2 GAUSS' LAW 664
Gauss' Law 664
Gauss' Law and Coulomb's Law 666

23-3 A CHARGED ISOLATED CONDUCTOR 668
A Charged Isolated Conductor 668

23-4 APPLYING GAUSS' LAW: CYLINDRICAL SYMMETRY 671
Applying Gauss' Law: Cylindrical Symmetry 671

23-5 APPLYING GAUSS' LAW: PLANAR SYMMETRY 673
Applying Gauss' Law: Planar Symmetry 673

23-6 APPLYING GAUSS' LAW: SPHERICAL SYMMETRY 675
Applying Gauss' Law: Spherical Symmetry 675

REVIEW & SUMMARY 677 QUESTIONS 677 PROBLEMS 679

24 Electric Potential 685

24-1 ELECTRIC POTENTIAL 685
What Is Physics? 685
Electric Potential and Electric Potential Energy 686

24-2 EQUIPOTENTIAL SURFACES AND THE ELECTRIC FIELD 690
Equipotential Surfaces 690
Calculating the Potential from the Field 691

24-3 POTENTIAL DUE TO A CHARGED PARTICLE 694
Potential Due to a Charged Particle 694
Potential Due a Group of Charged Particles 695

24-4 POTENTIAL DUE TO AN ELECTRIC DIPOLE 697
Potential Due to an Electric Dipole 697

24-5 POTENTIAL DUE TO A CONTINUOUS CHARGE DISTRIBUTION 698
Potential Due to a Continuous Charge Distribution 698

24-6 CALCULATING THE FIELD FROM THE POTENTIAL 701
Calculating the Field from the Potential 701

24-7 ELECTRIC POTENTIAL ENERGY OF A SYSTEM OF CHARGED PARTICLES 703
Electric Potential Energy of a System of Charged Particles 703

24-8 POTENTIAL OF A CHARGED ISOLATED CONDUCTOR 706
Potential of Charged Isolated Conductor 706

REVIEW & SUMMARY 707 QUESTIONS 708 PROBLEMS 710

25 Capacitance 717

25-1 CAPACITANCE 717
What Is Physics? 717
Capacitance 717

25-2 CALCULATING THE CAPACITANCE 719
Calculating the Capacitance 720

25-3 CAPACITORS IN PARALLEL AND IN SERIES 723
Capacitors in Parallel and in Series 724

25-4 ENERGY STORED IN AN ELECTRIC FIELD 728
Energy Stored in an Electric Field 728

25-5 CAPACITOR WITH A DIELECTRIC 731
Capacitor with a Dielectric 731
Dielectrics: An Atomic View 733

25-6 DIELECTRICS AND GAUSS' LAW 735
Dielectrics and Gauss' Law 735

REVIEW & SUMMARY 738 QUESTIONS 738 PROBLEMS 739

26 Current and Resistance 745

26-1 ELECTRIC CURRENT 745
What Is Physics? 745
Electric Current 746

26-2 CURRENT DENSITY 748
Current Density 749

26-3 RESISTANCE AND RESISTIVITY 752
Resistance and Resistivity 753

26-4 OHM'S LAW 756
Ohm's Law 756
A Microscopic View of Ohm's Law 758

26-5 POWER, SEMICONDUCTORS, SUPERCONDUCTORS 760
Power in Electric Circuits 760
Semiconductors 762
Superconductors 763

REVIEW & SUMMARY 763 QUESTIONS 764 PROBLEMS 765

27 Circuits 771

27-1 SINGLE-LOOP CIRCUITS 771
What Is Physics? 772
"Pumping" Charges 772
Work, Energy, and Emf 773
Calculating the Current in a Single-Loop Circuit 774
Other Single-Loop Circuits 776
Potential Difference Between Two Points 777

IPR2024-01137
CamelBak EX 2023
Page 13 of 96

27-2 MULTILOOP CIRCUITS 781
Multiloop Circuits 781

27-3 THE AMMETER AND THE VOLTMETER 788
The Ammeter and the Voltmeter 788

27-4 RC CIRCUITS 788
RC Circuits 789
REVIEW & SUMMARY 793 QUESTIONS 793 PROBLEMS 795

28 Magnetic Fields 803
28-1 MAGNETIC FIELDS AND THE DEFINITION OF $\vec{B}$ 803
What Is Physics? 803
What Produces a Magnetic Field? 804
The Definition of $\vec{B}$ 804

28-2 CROSSED FIELDS: DISCOVERY OF THE ELECTRON 808
Crossed Fields: Discovery of the Electron 809

28-3 CROSSED FIELDS: THE HALL EFFECT 810
Crossed Fields: The Hall Effect 811

28-4 A CIRCULATING CHARGED PARTICLE 814
A Circulating Charged Particle 814

28-5 CYCLOTRONS AND SYNCHROTRONS 817
Cyclotrons and Synchrotrons 818

28-6 MAGNETIC FORCE ON A CURRENT-CARRYING WIRE 820
Magnetic Force on a Current-Carrying Wire 820

28-7 TORQUE ON A CURRENT LOOP 822
Torque on a Current Loop 822

28-8 THE MAGNETIC DIPOLE MOMENT 824
The Magnetic Dipole Moment 825
REVIEW & SUMMARY 827 QUESTIONS 827 PROBLEMS 829

29 Magnetic Fields Due to Currents 836
29-1 MAGNETIC FIELD DUE TO A CURRENT 836
What Is Physics? 836
Calculating the Magnetic Field Due to a Current 837

29-2 FORCE BETWEEN TWO PARALLEL CURRENTS 842
Force Between Two Parallel Currents 842

29-3 AMPERE'S LAW 844
Ampere's Law 844

29-4 SOLENOIDS AND TOROIDS 848
Solenoids and Toroids 848

29-5 A CURRENT-CARRYING COIL AS A MAGNETIC DIPOLE 851
A Current-Carrying Coil as a Magnetic Dipole 851
REVIEW & SUMMARY 854 QUESTIONS 855 PROBLEMS 856

30 Induction and Inductance 864
30-1 FARADAY'S LAW AND LENZ'S LAW 864
What Is Physics 864
Two Experiments 865
Faraday's Law of Induction 865
Lenz's Law 868

30-2 INDUCTION AND ENERGY TRANSFERS 871
Induction and Energy Transfers 871

30-3 INDUCED ELECTRIC FIELDS 874
Induced Electric Fields 875

30-4 INDUCTORS AND INDUCTANCE 879
Inductors and Inductance 879

30-5 SELF-INDUCTION 881
Self-Induction 881

30-6 *RL* CIRCUITS 882
RL Circuits 883

30-7 ENERGY STORED IN A MAGNETIC FIELD 887
Energy Stored in a Magnetic Field 887

30-8 ENERGY DENSITY OF A MAGNETIC FIELD 889
Energy Density of a Magnetic Field 889

30-9 MUTUAL INDUCTION 890
Mutual Induction 890
REVIEW & SUMMARY 893 QUESTIONS 893 PROBLEMS 895

31 Electromagnetic Oscillations and Alternating Current 903
31-1 *LC* OSCILLATIONS 903
What Is Physics? 904
LC Oscillations, Qualitatively 904
The Electrical-Mechanical Analogy 906
LC Oscillations, Quantitatively 907

31-2 DAMPED OSCILLATIONS IN AN *RLC* CIRCUIT 910
Damped Oscillations in an *RLC* Circuit 911

31-3 FORCED OSCILLATIONS OF THREE SIMPLE CIRCUITS 912
Alternating Current 913
Forced Oscillations 914
Three Simple Circuits 914

31-4 THE SERIES *RLC* CIRCUIT 921
The Series *RLC* Circuit 921

IPR2024-01137
CamelBak EX 2023
Page 14 of 96

31-5 POWER IN ALTERNATING-CURRENT CIRCUITS 927
Power in Alternating-Current Circuits 927

31-6 TRANSFORMERS 930
Transformers 930
REVIEW & SUMMARY 933 QUESTIONS 934 PROBLEMS 935

32 Maxwell's Equations; Magnetism of Matter 941
32-1 GAUSS' LAW FOR MAGNETIC FIELDS 941
What Is Physics? 941
Gauss' Law for Magnetic Fields 942

32-2 INDUCED MAGNETIC FIELDS 943
Induced Magnetic Fields 943

32-3 DISPLACEMENT CURRENT 946
Displacement Current 947
Maxwell's Equations 949

32-4 MAGNETS 950
Magnets 950

32-5 MAGNETISM AND ELECTRONS 952
Magnetism and Electrons 953
Magnetic Materials 956

32-6 DIAMAGNETISM 957
Diamagnetism 957

32-7 PARAMAGNETISM 959
Paramagnetism 959

32-8 FERROMAGNETISM 961
Ferromagnetism 961
REVIEW & SUMMARY 964 QUESTIONS 965 PROBLEMS 967

33 Electromagnetic Waves 972
33-1 ELECTROMAGNETIC WAVES 972
What Is Physics? 972
Maxwell's Rainbow 973
The Traveling Electromagnetic Wave, Qualitatively 974
The Traveling Electromagnetic Wave, Quantitatively 977

33-2 ENERGY TRANSPORT AND THE POYNTING VECTOR 980
Energy Transport and the Poynting Vector 981

33-3 RADIATION PRESSURE 983
Radiation Pressure 983

33-4 POLARIZATION 985
Polarization 985

33-5 REFLECTION AND REFRACTION 990
Reflection and Refraction 991

33-6 TOTAL INTERNAL REFLECTION 996
Total Internal Reflection 996

33-7 POLARIZATION BY REFLECTION 997
Polarization by Reflection 998
REVIEW & SUMMARY 999 QUESTIONS 1000 PROBLEMS 1001

34 Images 1010
34-1 IMAGES AND PLANE MIRRORS 1010
What Is Physics? 1010
Two Types of Image 1010
Plane Mirrors 1012

34-2 SPHERICAL MIRRORS 1014
Spherical Mirrors 1015
Images from Spherical Mirrors 1016

34-3 SPHERICAL REFRACTING SURFACES 1020
Spherical Refracting Surfaces 1020

34-4 THIN LENSES 1023
Thin Lenses 1023

34-5 OPTICAL INSTRUMENTS 1030
Optical Instruments 1030

34-6 THREE PROOFS 1033
REVIEW & SUMMARY 1036 QUESTIONS 1037 PROBLEMS 1038

35 Interference 1047
35-1 LIGHT AS A WAVE 1047
What Is Physics? 1047
Light as a Wave 1048

35-2 YOUNG'S INTERFERENCE EXPERIMENT 1053
Diffraction 1053
Young's Interference Experiment 1054

35-3 INTERFERENCE AND DOUBLE-SLIT INTENSITY 1059
Coherence 1059
Intensity in Double-Slit Interference 1060

35-4 INTERFERENCE FROM THIN FILMS 1063
Interference from Thin Films 1064

35-5 MICHELSON'S INTERFEROMETER 1070
Michelson's Interferometer 1071
REVIEW & SUMMARY 1072 QUESTIONS 1072 PROBLEMS 1074

IPR2024-01137
CamelBak EX 2023
Page 15 of 96

36 Diffraction 1081

36-1 SINGLE-SLIT DIFFRACTION 1081
What Is Physics? 1081
Diffraction and the Wave Theory of Light 1081
Diffraction by a Single Slit: Locating the Minima 1083

36-2 INTENSITY IN SINGLE-SLIT DIFFRACTION 1086
Intensity in Single-Slit Diffraction 1086
Intensity in Single-Slit Diffraction, Quantitatively 1088

36-3 DIFFRACTION BY A CIRCULAR APERTURE 1090
Diffraction by a Circular Aperture 1091

36-4 DIFFRACTION BY A DOUBLE SLIT 1094
Diffraction by a Double Slit 1095

36-5 DIFFRACTION GRATINGS 1098
Diffraction Gratings 1098

36-6 GRATINGS: DISPERSION AND RESOLVING POWER 1101
Gratings: Dispersion and Resolving Power 1101

36-7 X-RAY DIFFRACTION 1104
X-Ray Diffraction 1104

REVIEW & SUMMARY 1107 QUESTIONS 1107 PROBLEMS 1108

37 Relativity 1116

37-1 SIMULTANEITY AND TIME DILATION 1116
What Is Physics? 1116
The Postulates 1117
Measuring an Event 1118
The Relativity of Simultaneity 1120
The Relativity of Time 1121

37-2 THE RELATIVITY OF LENGTH 1125
The Relativity of Length 1126

37-3 THE LORENTZ TRANSFORMATION 1129
The Lorentz Transformation 1129
Some Consequences of the Lorentz Equations 1131

37-4 THE RELATIVITY OF VELOCITIES 1133
The Relativity of Velocities 1133

37-5 DOPPLER EFFECT FOR LIGHT 1134
Doppler Effect for Light 1135

37-6 MOMENTUM AND ENERGY 1137
A New Look at Momentum 1138
A New Look at Energy 1138

REVIEW & SUMMARY 1143 QUESTIONS 1144 PROBLEMS 1145

38 Photons and Matter Waves 1153

38-1 THE PHOTON, THE QUANTUM OF LIGHT 1153
What Is Physics? 1153
The Photon, the Quantum of Light 1154

38-2 THE PHOTOELECTRIC EFFECT 1155
The Photoelectric Effect 1156

38-3 PHOTONS, MOMENTUM, COMPTON SCATTERING, LIGHT INTERFERENCE 1158
Photons Have Momentum 1159
Light as a Probability Wave 1162

38-4 THE BIRTH OF QUANTUM PHYSICS 1164
The Birth of Quantum Physics 1165

38-5 ELECTRONS AND MATTER WAVES 1166
Electrons and Matter Waves 1167

38-6 SCHRÖDINGER'S EQUATION 1170
Schrödinger's Equation 1170

38-7 HEISENBERG'S UNCERTAINTY PRINCIPLE 1172
Heisenberg's Uncertainty Principle 1173

38-8 REFLECTION FROM A POTENTIAL STEP 1174
Reflection from a Potential Step 1174

38-9 TUNNELING THROUGH A POTENTIAL BARRIER 1176
Tunneling Through a Potential Barrier 1176

REVIEW & SUMMARY 1179 QUESTIONS 1180 PROBLEMS 1181

39 More About Matter Waves 1186

39-1 ENERGIES OF A TRAPPED ELECTRON 1186
What Is Physics? 1186
String Waves and Matter Waves 1187
Energies of a Trapped Electron 1187

39-2 WAVE FUNCTIONS OF A TRAPPED ELECTRON 1191
Wave Functions of a Trapped Electron 1192

39-3 AN ELECTRON IN A FINITE WELL 1195
An Electron in a Finite Well 1195

39-4 TWO- AND THREE-DIMENSIONAL ELECTRON TRAPS 1197
More Electron Traps 1197
Two- and Three-Dimensional Electron Traps 1200

39-5 THE HYDROGEN ATOM 1201
The Hydrogen Atom Is an Electron Trap 1202
The Bohr Model of Hydrogen, a Lucky Break 1203
Schrödinger's Equation and the Hydrogen Atom 1205

REVIEW & SUMMARY 1213 QUESTIONS 1213 PROBLEMS 1214

IPR2024-01137
CamelBak EX 2023
Page 16 of 96

40 All About Atoms 1219
40-1 PROPERTIES OF ATOMS 1219
What Is Physics? 1220
Some Properties of Atoms 1220
Angular Momentum, Magnetic Dipole Moments 1222
40-2 THE STERN-GERLACH EXPERIMENT 1226
The Stern-Gerlach Experiment 1226
40-3 MAGNETIC RESONANCE 1229
Magnetic Resonance 1229
40-4 EXCLUSION PRINCIPLE AND MULTIPLE ELECTRONS IN A TRAP 1230
The Pauli Exclusion Principle 1230
Multiple Electrons in Rectangular Traps 1231
40-5 BUILDING THE PERIODIC TABLE 1234
Building the Periodic Table 1234
40-6 X RAYS AND THE ORDERING OF THE ELEMENTS 1236
X Rays and the Ordering of the Elements 1237
40-7 LASERS 1240
Lasers and Laser Light 1241
How Lasers Work 1242
REVIEW & SUMMARY 1245 QUESTIONS 1246 PROBLEMS 1247

41 Conduction of Electricity in Solids 1252
41-1 THE ELECTRICAL PROPERTIES OF METALS 1252
What Is Physics? 1252
The Electrical Properties of Solids 1253
Energy Levels in a Crystalline Solid 1254
Insulators 1254
Metals 1255
41-2 SEMICONDUCTORS AND DOPING 1261
Semiconductors 1262
Doped Semiconductors 1263
41-3 THE *p-n* JUNCTION AND THE TRANSISTOR 1265
The *p-n* Junction 1266
The Junction Rectifier 1267
The Light-Emitting Diode (LED) 1268
The Transistor 1270
REVIEW & SUMMARY 1271 QUESTIONS 1272 PROBLEMS 1272

42 Nuclear Physics 1276
42-1 DISCOVERING THE NUCLEUS 1276
What Is Physics? 1276
Discovering the Nucleus 1276
42-2 SOME NUCLEAR PROPERTIES 1279
Some Nuclear Properties 1280
42-3 RADIOACTIVE DECAY 1286
Radioactive Decay 1286
42-4 ALPHA DECAY 1289
Alpha Decay 1289
42-5 BETA DECAY 1292
Beta Decay 1292
42-6 RADIOACTIVE DATING 1295
Radioactive Dating 1295
42-7 MEASURING RADIATION DOSAGE 1296
Measuring Radiation Dosage 1296
42-8 NUCLEAR MODELS 1297
Nuclear Models 1297
REVIEW & SUMMARY 1300 QUESTIONS 1301 PROBLEMS 1302

43 Energy from the Nucleus 1309
43-1 NUCLEAR FISSION 1309
What Is Physics? 1309
Nuclear Fission: The Basic Process 1310
A Model for Nuclear Fission 1312
43-2 THE NUCLEAR REACTOR 1316
The Nuclear Reactor 1316
43-3 A NATURAL NUCLEAR REACTOR 1320
A Natural Nuclear Reactor 1320
43-4 THERMONUCLEAR FUSION: THE BASIC PROCESS 1322
Thermonuclear Fusion: The Basic Process 1322
43-5 THERMONUCLEAR FUSION IN THE SUN AND OTHER STARS 1324
Thermonuclear Fusion in the Sun and Other Stars 1324
43-6 CONTROLLED THERMONUCLEAR FUSION 1326
Controlled Thermonuclear Fusion 1326
REVIEW & SUMMARY 1329 QUESTIONS 1329 PROBLEMS 1330

44 Quarks, Leptons, and the Big Bang 1334
44-1 GENERAL PROPERTIES OF ELEMENTARY PARTICLES 1334
What Is Physics? 1334
Particles, Particles, Particles 1335
An Interlude 1339
44-2 LEPTONS, HADRONS, AND STRANGENESS 1343
The Leptons 1343

IPR2024-01137
CamelBak EX 2023
Page 17 of 96

The Hadrons 1345
Still Another Conservation Law 1346
The Eightfold Way 1347

44-3 QUARKS AND MESSENGER PARTICLES 1349
The Quark Model 1349
Basic Forces and Messenger Particles 1352

44-4 COSMOLOGY 1355
A Pause for Reflection 1355
The Universe Is Expanding 1356
The Cosmic Background Radiation 1357
Dark Matter 1358
The Big Bang 1358
A Summing Up 1361

REVIEW & SUMMARY 1362 QUESTIONS 1362 PROBLEMS 1363

APPENDICES
A The International System of Units (SI) A-1
B Some Fundamental Constants of Physics A-3
C Some Astronomical Data A-4
D Conversion Factors A-5
E Mathematical Formulas A-9
F Properties of The Elements A-12
G Periodic Table of The Elements A-15

ANSWERS
to Checkpoints and Odd-Numbered Questions and Problems AN-1

INDEX I-1

IPR2024-01137
CamelBak EX 2023
Page 18 of 96

PREFACE

WHY I WROTE THIS BOOK

Fun with a big challenge. That is how I have regarded physics since the day when Sharon, one of the students in a class I taught as a graduate student, suddenly demanded of me, "What has any of this got to do with my life?" Of course I immediately responded, "Sharon, this has everything to do with your life—this is physics."

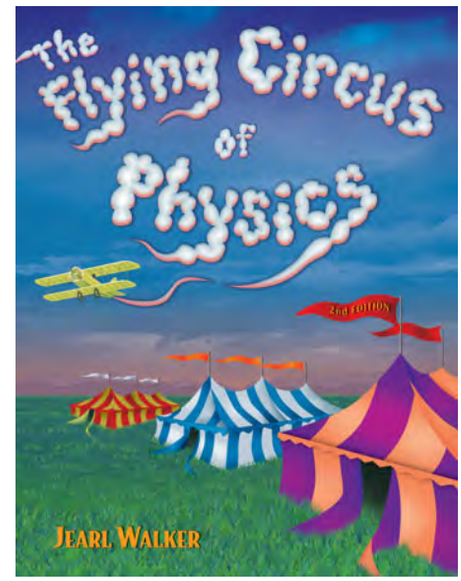

She asked me for an example. I thought and thought but could not come up with a single one.That night I began writing the book *The Flying Circus of Physics* (John Wiley & Sons Inc., 1975) for Sharon but also for me because I realized her complaint was mine. I had spent six years slugging my way through many dozens of physics textbooks that were carefully written with the best of pedagogical plans, but there was something missing. Physics is the most interesting subject in the world because it is about how the world works, and yet the textbooks had been thoroughly wrung of any connection with the real world. The fun was missing.

I have packed a lot of real-world physics into *Fundamentals of Physics*, connecting it with the new edition of *The Flying Circus of Physics*. Much of the material comes from the introductory physics classes I teach, where I can judge from the faces and blunt comments what material and presentations work and what do not. The notes I make on my successes and failures there help form the basis of this book. My message here is the same as I had with every student I've met since Sharon so long ago: "Yes, you *can* reason from basic physics concepts all the way to valid conclusions about the real world, and that understanding of the real world is where the fun is."

I have many goals in writing this book but the overriding one is to provide instructors with tools by which they can teach students how to effectively read scientific material, identify fundamental concepts, reason through scientific questions, and solve quantitative problems. This process is not easy for either students or instructors. Indeed, the course associated with this book may be one of the most challenging of all the courses taken by a student. However, it can also be one of the most rewarding because it reveals the world's fundamental clockwork from which all scientific and engineering applications spring.

Many users of the ninth edition (both instructors and students) sent in comments and suggestions to improve the book. These improvements are now incorporated into the narrative and problems throughout the book. The publisher John Wiley & Sons and I regard the book as an ongoing project and encourage more input from users. You can send suggestions, corrections, and positive or negative comments to John Wiley & Sons or Jearl Walker (mail address: Physics Department, Cleveland State University, Cleveland, OH 44115 USA; or the blog site at www.flyingcircusofphysics.com). We may not be able to respond to all suggestions, but we keep and study each of them.

WHAT'S NEW?

Modules and Learning Objectives "What was I supposed to learn from this section?" Students have asked me this question for decades, from the weakest student to the strongest. The problem is that even a thoughtful student may not feel confident that the important points were captured while reading a section. I felt the same way back when I was using the first edition of Halliday and Resnick while taking first-year physics.

To ease the problem in this edition, I restructured the chapters into concept modules based on a primary theme and begin each module with a list of the module's learning objectives. The list is an explicit statement of the skills and learning points that should be gathered in reading the module. Each list is following by a brief summary of the key ideas that should also be gathered. For example, check out the first module in Chapter 16, where a student faces a truck load of concepts and terms. Rather than depending on the student's ability to gather and sort those ideas, I now provide an explicit checklist that functions somewhat like the checklist a pilot works through before taxiing out to the runway for takeoff.

IPR2024-01137
CamelBak EX 2023
Page 19 of 96

Links Between Homework Problems and Learning Objectives In *WileyPLUS*, every question and problem at the end of the chapter is linked to a learning objective, to answer the (usually unspoken) questions, "Why am I working this problem? What am I supposed to learn from it?" By being explicit about a problem's purpose, I believe that a student might better transfer the learning objective to other problems with a different wording but the same key idea. Such transference would help defeat the common trouble that a student learns to work a particular problem but cannot then apply its key idea to a problem in a different setting.

Rewritten Chapters My students have continued to be challenged by several key chapters and by spots in several other chapters and so, in this edition, I rewrote a lot of the material. For example, I redesigned the chapters on Gauss' law and electric potential, which have proved to be tough-going for my students. The presentations are now smoother and more direct to the key points. In the quantum chapters, I expanded the coverage of the Schrödinger equation, including reflection of matter waves from a step potential. At the request of several instructors, I decoupled the discussion of the Bohr atom from the Schrödinger solution for the hydrogen atom so that the historical account of Bohr's work can be bypassed. Also, there is now a module on Planck's blackbody radiation.

New Sample Problems and Homework Questions and Problems Sixteen new sample problems have been added to the chapters, written so as to spotlight some of the difficult areas for my students. Also, about 250 problems and 50 questions have been added to the homework sections of the chapters. Some of these problems come from earlier editions of the book, as requested by several instructors.

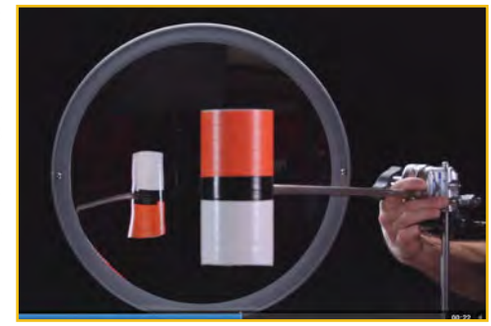

Video Illustrations In the eVersion of the text available in *WileyPLUS*, David Maiullo of Rutgers University has created video versions of approximately 30 of the photographs and figures from the text. Much of physics is the study of things that move and video can often provide a better representation than a static photo or figure.

Online Aid *WileyPLUS* is not just an online grading program. Rather, it is a dynamic learning center stocked with many different learning aids, including just-in-time problem-solving tutorials, embedded reading quizzes to encourage reading, animated figures, hundreds of sample problems, loads of simulations and demonstrations, and over 1500 videos ranging from math reviews to mini-lectures to examples. More of these learning aids are added every semester. For this 10th edition of HRW, some of the photos involving motion have been converted into videos so that the motion can be slowed and analyzed.

These thousands of learning aids are available 24/7 and can be repeated as many times as desired. Thus, if a student gets stuck on a homework problem at, say, 2:00 AM (which appears to be a popular time for doing physics homework), friendly and helpful resources are available at the click of a mouse.

LEARNINGS TOOLS

When I learned first-year physics in the first edition of Halliday and Resnick, I caught on by repeatedly rereading a chapter. These days we better understand that students have a wide range of learning styles. So, I have produced a wide range of learning tools, both in this new edition and online in *WileyPLUS*:

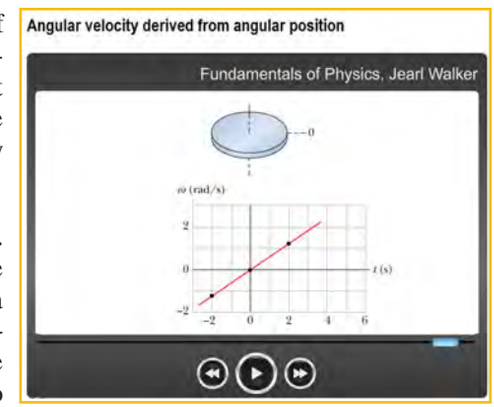

Animations of one of the key figures in each chapter. Here in the book, those figures are flagged with the swirling icon. In the online chapter in *WileyPLUS*, a mouse click begins the animation. I have chosen the figures that are rich in information so that a student can see the physics in action and played out over a minute or two

IPR2024-01137
CamelBak EX 2023
Page 20 of 96

instead of just being flat on a printed page. Not only does this give life to the physics, but the animation can be repeated as many times as a student wants.

Videos I have made well over 1500 instructional videos, with more coming each semester. Students can watch me draw or type on the screen as they hear me talk about a solution, tutorial, sample problem, or review, very much as they would experience were they sitting next to me in my office while I worked out something on a notepad. An instructor's lectures and tutoring will always be the most valuable learning tools, but my videos are available 24 hours a day, 7 days a week, and can be repeated indefinitely.

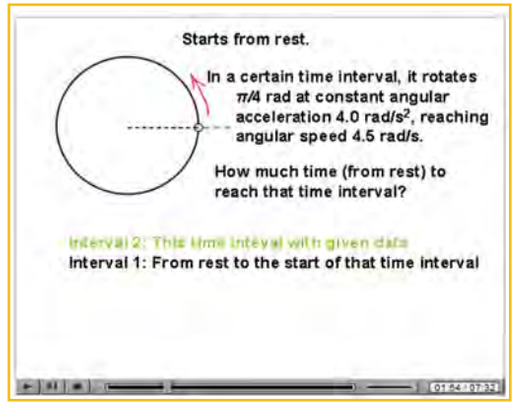

- **Video tutorials on subjects in the chapters.** I chose the subjects that challenge the students the most, the ones that my students scratch their heads about.
- **Video reviews of high school math**, such as basic algebraic manipulations, trig functions, and simultaneous equations.
- **Video introductions to math**, such as vector multiplication, that will be new to the students.
- **Video presentations of every Sample Problem** in the textbook chapters . My intent is to work out the physics, starting with the Key Ideas instead of just grabbing a formula. However, I also want to demonstrate how to read a sample problem, that is, how to read technical material to learn problem-solving procedures that can be transferred to other types of problems.
- **Video solutions to 20% of the end-of-chapter problems.** The availability and timing of these solutions are controlled by the instructor. For example, they might be available after a homework deadline or a quiz. Each solution is not simply a plug-and-chug recipe. Rather I build a solution from the Key Ideas to the first step of reasoning and to a final solution. The student learns not just how to solve a particular problem but how to tackle any problem, even those that require *physics courage*.
- **Video examples of how to read data from graphs** (more than simply reading off a number with no comprehension of the physics).

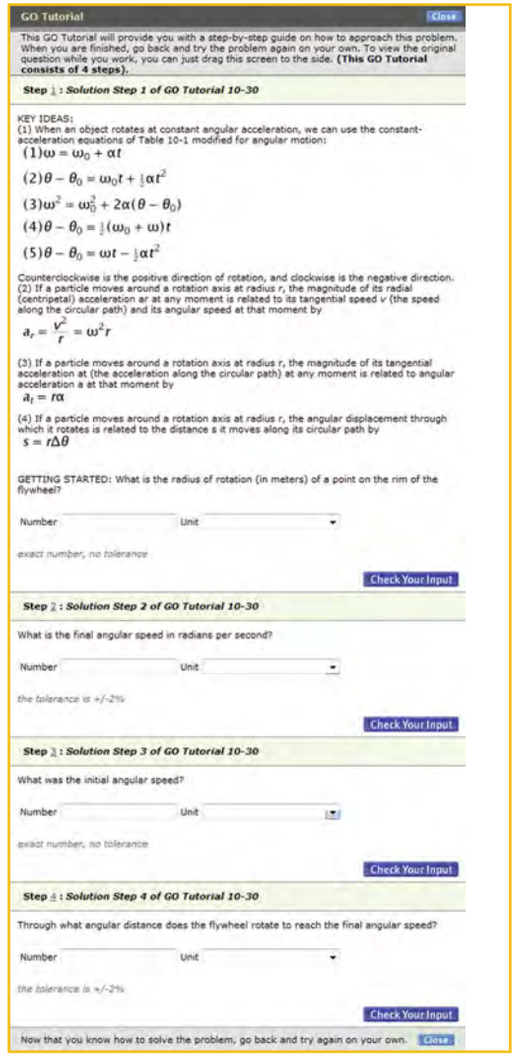

Problem-Solving Help I have written a large number of resources for *WileyPLUS* designed to help build the students' problem-solving skills.

- **Every sample problem in the textbook** is available online in both reading and video formats.
- **Hundreds of additional sample problems.** These are available as stand-alone resources but (at the discretion of the instructor) they are also linked out of the homework problems. So, if a homework problem deals with, say, forces on a block on a ramp, a link to a related sample problem is provided. However, the sample problem is not just a replica of the homework problem and thus does not provide a solution that can be merely duplicated without comprehension.
- **GO Tutorials** for 15% of the end-of-chapter homework problems. In multiple steps, I lead a student through a homework problem, starting with the Key Ideas and giving hints when wrong answers are submitted. However, I purposely leave the last step (for the final answer) to the student so that they are responsible at the end. Some online tutorial systems trap a student when wrong answers are given, which can generate a lot of frustration. My GO Tutorials are not traps, because at any step along the way, a student can return to the main problem.
- **Hints on every end-of-chapter homework problem** are available (at the discretion of the instructor). I wrote these as true hints about the main ideas and the general procedure for a solution, not as recipes that provide an answer without any comprehension.

IPR2024-01137
CamelBak EX 2023
Page 21 of 96

Evaluation Materials

• **Reading questions are available within each online section.** I wrote these so that they do not require analysis or any deep understanding; rather they simply test whether a student has read the section. When a student opens up a section, a randomly chosen reading question (from a bank of questions) appears at the end. The instructor can decide whether the question is part of the grading for that section or whether it is just for the benefit of the student.

• **Checkpoints are available within most sections.** I wrote these so that they require analysis and decisions about the physics in the section. *Answers to all checkpoints are in the back of the book*.

Checkpoint 1

Here are three pairs of initial and final positions, respectively, along an x axis. Which pairs give a negative displacement: (a) −3 m, +5 m; (b) −3 m, −7 m; (c) 7 m, −3 m?

• **All end-of-chapter homework Problems** in the book (and many more problems) are available in *WileyPLUS*. The instructor can construct a homework assignment and control how it is graded when the answers are submitted online. For example, the instructor controls the deadline for submission and how many attempts a student is allowed on an answer. The instructor also controls which, if any, learning aids are available with each homework problem. Such links can include hints, sample problems, in-chapter reading materials, video tutorials, video math reviews, and even video solutions (which can be made available to the students after, say, a homework deadline).

• **Symbolic notation problems** that require algebraic answers are available in every chapter.

• **All end-of-chapter homework Questions** in the book are available for assignment in *WileyPLUS*. These Questions (in a multiple choice format) are designed to evaluate the students' conceptual understanding.

Icons for Additional Help When worked-out solutions are provided either in print or electronically for certain of the odd-numbered problems, the statements for those problems include an icon to alert both student and instructor as to where the solutions are located. There are also icons indicating which problems have GO Tutorial, an Interactive LearningWare, or a link to the *The Flying Circus of Physics*. An icon guide is provided here and at the beginning of each set of problems.

Tutoring problem available (at instructor's discretion) in *WileyPLUS* and WebAssign

SSM Worked-out solution available in Student Solutions Manual

• – ••• Number of dots indicates level of problem difficulty

Additional information available in *The Flying Circus of Physics* and at flyingcircusofphysics.com

WWW Worked-out solution is at

ILW Interactive solution is at

http://www.wiley.com/college/halliday

VERSIONS OF THE TEXT

To accommodate the individual needs of instructors and students, the ninth edition of *Fundamentals of Physics* is available in a number of different versions.

The **Regular Edition** consists of Chapters 1 through 37 (ISBN 9781118230718).

The **Extended Edition** contains seven additional chapters on quantum physics and cosmology, Chapters 1–44 (ISBN 9781118230725).

Volume 1 — Chapters 1–20 (Mechanics and Thermodynamics), hardcover, ISBN 9781118233764

Volume 2 — Chapters 21–44 (E&M, Optics, and Quantum Physics), hardcover, ISBN 9781118230732

IPR2024-01137
CamelBak EX 2023
Page 22 of 96

INSTRUCTOR SUPPLEMENTS

Instructor's Solutions Manual by Sen-Ben Liao, Lawrence Livermore National Laboratory. This manual provides worked-out solutions for all problems found at the end of each chapter. It is available in both MSWord and PDF.

Instructor Companion Site http://www.wiley.com/college/halliday

- **Instructor's Manual** This resource contains lecture notes outlining the most important topics of each chapter; demonstration experiments; laboratory and computer projects; film and video sources; answers to all Questions, Exercises, Problems, and Checkpoints; and a correlation guide to the Questions, Exercises, and Problems in the previous edition. It also contains a complete list of all problems for which solutions are available to students (SSM, WWW, and ILW).
- **Lecture PowerPoint Slides** These PowerPoint slides serve as a helpful starter pack for instructors, outlining key concepts and incorporating figures and equations from the text.
- **Classroom Response Systems ("Clicker") Questions** by David Marx, Illinois State University. There are two sets of questions available: Reading Quiz questions and Interactive Lecture questions. The Reading Quiz questions are intended to be relatively straightforward for any student who reads the assigned material. The Interactive Lecture questions are intended for use in an interactive lecture setting.
- **Wiley Physics Simulations** by Andrew Duffy, Boston University and John Gastineau, Vernier Software. This is a collection of 50 interactive simulations (Java applets) that can be used for classroom demonstrations.
- **Wiley Physics Demonstrations** by David Maiullo, Rutgers University. This is a collection of digital videos of 80 standard physics demonstrations. They can be shown in class or accessed from *WileyPLUS*. There is an accompanying Instructor's Guide that includes "clicker" questions.
- **Test Bank** For the 10th edition, the Test Bank has been completely over-hauled by Suzanne Willis, Northern Illinois University. The Test Bank includes more than 2200 multiple-choice questions. These items are also available in the Computerized Test Bank which provides full editing features to help you customize tests (available in both IBM and Macintosh versions).
- **All text illustrations** suitable for both classroom projection and printing.

Online Homework and Quizzing. In addition to *WileyPLUS*, *Fundamentals of Physics*, tenth edition, also supports WebAssignPLUS and LON-CAPA, which are other programs that give instructors the ability to deliver and grade homework and quizzes online. WebAssign PLUS also offers students an online version of the text.

STUDENT SUPPLEMENTS

Student Companion Site. The web site http://www.wiley.com/college/halliday was developed specifically for *Fundamentals of Physics*, tenth edition, and is designed to further assist students in the study of physics. It includes solutions to selected end-of-chapter problems (which are identified with a www icon in the text); simulation exercises; tips on how to make best use of a programmable calculator; and the Interactive LearningWare tutorials that are described below.

Student Study Guide (ISBN 9781118230787) by Thomas Barrett of Ohio State University. The Student Study Guide consists of an overview of the chapter's important concepts, problem solving techniques and detailed examples.

Student Solutions Manual (ISBN 9781118230664) by Sen-Ben Liao, Lawrence Livermore National Laboratory. This manual provides students with complete worked-out solutions to 15 percent of the problems found at the end of each chapter within the text. The Student Solutions Manual for the 10th edition is written using an innovative approach called TEAL which stands for Think, Express, Analyze, and Learn. This learning strategy was originally developed at the Massachusetts Institute of Technology and has proven to be an effective learning tool for students. These problems with TEAL solutions are indicated with an SSM icon in the text.

IPR2024-01137
CamelBak EX 2023
Page 23 of 96

Interactive Learningware. This software guides students through solutions to 200 of the end-of-chapter problems. These problems are indicated with an ILW icon in the text. The solutions process is developed interactively, with appropriate feedback and access to error-specific help for the most common mistakes.

Introductory Physics with Calculus as a Second Language: (ISBN 9780471739104) *Mastering Problem Solving* by Thomas Barrett of Ohio State University. This brief paperback teaches the student how to approach problems more efficiently and effectively. The student will learn how to recognize common patterns in physics problems, break problems down into manageable steps, and apply appropriate techniques. The book takes the student step by step through the solutions to numerous examples.

IPR2024-01137
CamelBak EX 2023
Page 24 of 96

ACKNOWLEDGMENTS

A great many people have contributed to this book. Sen-Ben Liao of Lawrence Livermore National Laboratory, James Whitenton of Southern Polytechnic State University, and Jerry Shi, of Pasadena City College, performed the Herculean task of working out solutions for every one of the homework problems in the book. At John Wiley publishers, the book received support from Stuart Johnson, Geraldine Osnato and Aly Rentrop, the editors who oversaw the entire project from start to finish. We thank Elizabeth Swain, the production editor, for pulling all the pieces together during the complex production process. We also thank Maddy Lesure for her design of the text and the cover; Lee Goldstein for her page make-up; Helen Walden for her copyediting; and Lilian Brady for her proofreading. Jennifer Atkins was inspired in the search for unusual and interesting photographs. Both the publisher John Wiley & Sons, Inc. and Jearl Walker would like to thank the following for comments and ideas about the recent editions:

Jonathan Abramson, *Portland State University*; Omar Adawi, *Parkland College*; Edward Adelson, *The Ohio State University*; Steven R. Baker, *Naval Postgraduate School*; George Caplan, *Wellesley College*; Richard Kass, *The Ohio State University*; M. R. Khoshbin-e-Khoshnazar, *Research Institution for Curriculum Development & Educational Innovations (Tehran)*; Craig Kletzing, *University of Iowa*, Stuart Loucks, *American River College*; Laurence Lurio, *Northern Illinois University*; Ponn Maheswaranathan, *Winthrop University;* Joe McCullough, *Cabrillo College*; Carl E. Mungan, *U. S. Naval Academy*, Don N. Page, *University of Alberta*; Elie Riachi, *Fort Scott Community College*; Andrew G. Rinzler, *University of Florida*; Dubravka Rupnik, *Louisiana State University*; Robert Schabinger, *Rutgers University*; Ruth Schwartz, *Milwaukee School of Engineering*; Carol Strong, *University of Alabama at Huntsville*, Nora Thornber, *Raritan Valley Community College*; Frank Wang, *LaGuardia Community College*; Graham W. Wilson, *University of Kansas*; Roland Winkler, *Northern Illinois University*; William Zacharias, *Cleveland State University*; Ulrich Zurcher, *Cleveland State University*.

Finally, our external reviewers have been outstanding and we acknowledge here our debt to each member of that team.

Maris A. Abolins, *Michigan State University*
Edward Adelson, *Ohio State University*
Nural Akchurin, *Texas Tech*
Yildirim Aktas, *University of North Carolina-Charlotte*
Barbara Andereck, *Ohio Wesleyan University*
Tetyana Antimirova, *Ryerson University*
Mark Arnett, *Kirkwood Community College*
Arun Bansil, *Northeastern University*
Richard Barber, *Santa Clara University*
Neil Basecu, *Westchester Community College*
Anand Batra, *Howard University*
Kenneth Bolland, *The Ohio State University*
Richard Bone, *Florida International University*
Michael E. Browne, *University of Idaho*
Timothy J. Burns, *Leeward Community College*
Joseph Buschi, *Manhattan College*
Philip A. Casabella, *Rensselaer Polytechnic Institute*
Randall Caton, *Christopher Newport College*
Roger Clapp, *University of South Florida*
W. R. Conkie, *Queen's University*
Renate Crawford, *University of Massachusetts-Dartmouth*
Mike Crivello, *San Diego State University*
Robert N. Davie, Jr., *St. Petersburg Junior College*
Cheryl K. Dellai, *Glendale Community College*
Eric R. Dietz, *California State University at Chico*
N. John DiNardo, *Drexel University*
Eugene Dunnam, *University of Florida*
Robert Endorf, *University of Cincinnati*
F. Paul Esposito, *University of Cincinnati*
Jerry Finkelstein, *San Jose State University*
Robert H. Good, *California State University-Hayward*
Michael Gorman, *University of Houston*
Benjamin Grinstein, *University of California, San Diego*
John B. Gruber, *San Jose State University*
Ann Hanks, *American River College*
Randy Harris, *University of California-Davis*
Samuel Harris, *Purdue University*
Harold B. Hart, *Western Illinois University*
Rebecca Hartzler, *Seattle Central Community College*
John Hubisz, *North Carolina StateUniversity*
Joey Huston, *Michigan State University*
David Ingram, *Ohio University*
Shawn Jackson, *University of Tulsa*
Hector Jimenez, *University of Puerto Rico*
Sudhakar B. Joshi, *York University*
Leonard M. Kahn, *University of Rhode Island*
Sudipa Kirtley, *Rose-Hulman Institute*
Leonard Kleinman, *University of Texas at Austin*
Craig Kletzing, *University of Iowa*
Peter F. Koehler, *University of Pittsburgh*

IPR2024-01137
CamelBak EX 2023
Page 25 of 96

Arthur Z. Kovacs, *Rochester Institute of Technology*
Kenneth Krane, *Oregon State University*
Hadley Lawler, *Vanderbilt University*
Priscilla Laws, *Dickinson College*
Edbertho Leal, *Polytechnic University of Puerto Rico*
Vern Lindberg, *Rochester Institute of Technology*
Peter Loly, *University of Manitoba*
James MacLaren, *Tulane University*
Andreas Mandelis, *University of Toronto*
Robert R. Marchini, *Memphis State University*
Andrea Markelz, *University at Buffalo, SUNY*
Paul Marquard, *Caspar College*
David Marx, *Illinois State University*
Dan Mazilu, *Washington and LeeUniversity*
James H. McGuire, *Tulane University*
David M. McKinstry, *Eastern Washington University*
Jordon Morelli, *Queen's University*
Eugene Mosca, *United States Naval Academy*
Eric R. Murray, *Georgia Institute of Technology, School of Physics*
James Napolitano, *Rensselaer Polytechnic Institute*
Blaine Norum, *University of Virginia*
Michael O'Shea, *Kansas State University*
Patrick Papin, *San Diego State University*
Kiumars Parvin, *San Jose State University*
Robert Pelcovits, *Brown University*
Oren P. Quist, *South Dakota State University*
Joe Redish, *University of Maryland*
Timothy M. Ritter, *University of North Carolina at Pembroke*
Dan Styer, *Oberlin College*
Frank Wang, *LaGuardia Community College*
Robert Webb, *Texas A&M University*
Suzanne Willis, *Northern Illinois University*
Shannon Willoughby, *Montana State University*

IPR2024-01137
CamelBak EX 2023
Page 26 of 96

CHAPTER 10

Rotation

10-1 ROTATIONAL VARIABLES

Learning Objectives

After reading this module, you should be able to . . .

10.01 Identify that if all parts of a body rotate around a fixed axis locked together, the body is a rigid body. (This chapter is about the motion of such bodies.)

10.02 Identify that the angular position of a rotating rigid body is the angle that an internal reference line makes with a fixed, external reference line.

10.03 Apply the relationship between angular displacement and the initial and final angular positions.

10.04 Apply the relationship between average angular velocity, angular displacement, and the time interval for that displacement.

10.05 Apply the relationship between average angular acceleration, change in angular velocity, and the time interval for that change.

10.06 Identify that counterclockwise motion is in the positive direction and clockwise motion is in the negative direction.

10.07 Given angular position as a *function of time*, calculate the instantaneous angular velocity at any particular time and the average angular velocity between any two particular times.

10.08 Given a *graph* of angular position versus time, determine the instantaneous angular velocity at a particular time and the average angular velocity between any two particular times.

10.09 Identify instantaneous angular speed as the magnitude of the instantaneous angular velocity.

10.10 Given angular velocity as a *function of time*, calculate the instantaneous angular acceleration at any particular time and the average angular acceleration between any two particular times.

10.11 Given a *graph* of angular velocity versus time, determine the instantaneous angular acceleration at any particular time and the average angular acceleration between any two particular times.

10.12 Calculate a body's change in angular velocity by integrating its angular acceleration function with respect to time.

10.13 Calculate a body's change in angular position by integrating its angular velocity function with respect to time.

Key Ideas

● To describe the rotation of a rigid body about a fixed axis, called the rotation axis, we assume a reference line is fixed in the body, perpendicular to that axis and rotating with the body. We measure the angular position θ of this line relative to a fixed direction. When θ is measured in radians,

$$\theta = \frac{s}{r} \quad \text{(radian measure)},$$

where s is the arc length of a circular path of radius r and angle θ.

● Radian measure is related to angle measure in revolutions and degrees by

$$1 \text{ rev} = 360^\circ = 2\pi \text{ rad}.$$

● A body that rotates about a rotation axis, changing its angular position from θ_1 to θ_2, undergoes an angular displacement

$$\Delta\theta = \theta_2 - \theta_1,$$

where $\Delta\theta$ is positive for counterclockwise rotation and negative for clockwise rotation.

● If a body rotates through an angular displacement $\Delta\theta$ in a time interval Δt, its average angular velocity ω_{avg} is

$$\omega_{avg} = \frac{\Delta\theta}{\Delta t}.$$

The (instantaneous) angular velocity ω of the body is

$$\omega = \frac{d\theta}{dt}.$$

Both ω_{avg} and ω are vectors, with directions given by a right-hand rule. They are positive for counterclockwise rotation and negative for clockwise rotation. The magnitude of the body's angular velocity is the angular speed.

● If the angular velocity of a body changes from ω_1 to ω_2 in a time interval $\Delta t = t_2 - t_1$, the average angular acceleration α_{avg} of the body is

$$\alpha_{avg} = \frac{\omega_2 - \omega_1}{t_2 - t_1} = \frac{\Delta\omega}{\Delta t}.$$

The (instantaneous) angular acceleration α of the body is

$$\alpha = \frac{d\omega}{dt}.$$

Both α_{avg} and α are vectors.

IPR2024-01137
CamelBak EX 2023
Page 27 of 96

What Is Physics?

As we have discussed, one focus of physics is motion. However, so far we have examined only the motion of **translation,** in which an object moves along a straight or curved line, as in Fig. 10-1*a*. We now turn to the motion of **rotation,** in which an object turns about an axis, as in Fig. 10-1*b*.

You see rotation in nearly every machine, you use it every time you open a beverage can with a pull tab, and you pay to experience it every time you go to an amusement park. Rotation is the key to many fun activities, such as hitting a long drive in golf (the ball needs to rotate in order for the air to keep it aloft longer) and throwing a curveball in baseball (the ball needs to rotate in order for the air to push it left or right). Rotation is also the key to more serious matters, such as metal failure in aging airplanes.

We begin our discussion of rotation by defining the variables for the motion, just as we did for translation in Chapter 2. As we shall see, the variables for rotation are analogous to those for one-dimensional motion and, as in Chapter 2, an important special situation is where the acceleration (here the rotational acceleration) is constant. We shall also see that Newton's second law can be written for rotational motion, but we must use a new quantity called *torque* instead of just force. Work and the work–kinetic energy theorem can also be applied to rotational motion, but we must use a new quantity called *rotational inertia* instead of just mass. In short, much of what we have discussed so far can be applied to rotational motion with, perhaps, a few changes.

Caution: In spite of this repetition of physics ideas, many students find this and the next chapter very challenging. Instructors have a variety of reasons as to why, but two reasons stand out: (1) There are a lot of symbols (with Greek

Mike Segar/Reuters/Landov LLC

(*a*)

Elsa/Getty Images, Inc.

(*b*)

Figure 10-1 Figure skater Sasha Cohen in motion of (*a*) pure translation in a fixed direction and (*b*) pure rotation about a vertical axis.

IPR2024-01137
CamelBak EX 2023
Page 28 of 96



This reference line is part of the body and perpendicular to the rotation axis. We use it to measure the rotation of the body relative to a fixed direction.

Figure 10-2 A rigid body of arbitrary shape in pure rotation about the z axis of a coordinate system. The position of the *reference line* with respect to the rigid body is arbitrary, but it is perpendicular to the rotation axis. It is fixed in the body and rotates with the body.

letters) to sort out. (2) Although you are very familiar with linear motion (you can get across the room and down the road just fine), you are probably very unfamiliar with rotation (and that is one reason why you are willing to pay so much for amusement park rides). If a homework problem looks like a foreign language to you, see if translating it into the one-dimensional linear motion of Chapter 2 helps. For example, if you are to find, say, an *angular* distance, temporarily delete the word *angular* and see if you can work the problem with the Chapter 2 notation and ideas.

Rotational Variables

We wish to examine the rotation of a rigid body about a fixed axis. A **rigid body** is a body that can rotate with all its parts locked together and without any change in its shape. A **fixed axis** means that the rotation occurs about an axis that does not move. Thus, we shall not examine an object like the Sun, because the parts of the Sun (a ball of gas) are not locked together. We also shall not examine an object like a bowling ball rolling along a lane, because the ball rotates about a moving axis (the ball's motion is a mixture of rotation and translation).

Figure 10-2 shows a rigid body of arbitrary shape in rotation about a fixed axis, called the **axis of rotation** or the **rotation axis.** In pure rotation (*angular motion*), every point of the body moves in a circle whose center lies on the axis of rotation, and every point moves through the same angle during a particular time interval. In pure translation (*linear motion*), every point of the body moves in a straight line, and every point moves through the same *linear distance* during a particular time interval.

We deal now—one at a time—with the angular equivalents of the linear quantities position, displacement, velocity, and acceleration.

Angular Position

Figure 10-2 shows a *reference line*, fixed in the body, perpendicular to the rotation axis and rotating with the body. The **angular position** of this line is the angle of the line relative to a fixed direction, which we take as the **zero angular position.** In Fig. 10-3, the angular position θ is measured relative to the positive direction of the x axis. From geometry, we know that θ is given by

$$\theta = \frac{s}{r} \quad \text{(radian measure).} \tag{10-1}$$

Here s is the length of a circular arc that extends from the x axis (the zero angular position) to the reference line, and r is the radius of the circle.

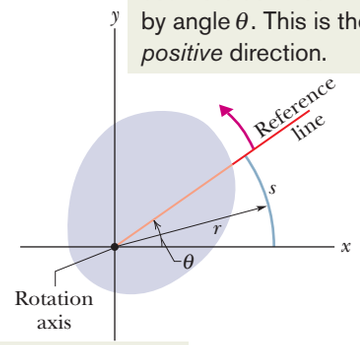

The body has rotated *counterclockwise* by angle θ. This is the *positive* direction.

This dot means that the rotation axis is out toward you.

Figure 10-3 The rotating rigid body of Fig. 10-2 in cross section, viewed from above. The plane of the cross section is perpendicular to the rotation axis, which now extends out of the page, toward you. In this position of the body, the reference line makes an angle θ with the x axis.

IPR2024-01137
CamelBak EX 2023
Page 29 of 96

An angle defined in this way is measured in **radians** (rad) rather than in revolutions (rev) or degrees. The radian, being the ratio of two lengths, is a pure number and thus has no dimension. Because the circumference of a circle of radius r is $2\pi r$, there are 2π radians in a complete circle:

$$1 \text{ rev} = 360° = \frac{2\pi r}{r} = 2\pi \text{ rad}, \tag{10-2}$$

and thus

$$1 \text{ rad} = 57.3° = 0.159 \text{ rev}. \tag{10-3}$$

We do *not* reset θ to zero with each complete rotation of the reference line about the rotation axis. If the reference line completes two revolutions from the zero angular position, then the angular position θ of the line is $\theta = 4\pi$ rad.

For pure translation along an x axis, we can know all there is to know about a moving body if we know $x(t)$, its position as a function of time. Similarly, for pure rotation, we can know all there is to know about a rotating body if we know $\theta(t)$, the angular position of the body's reference line as a function of time.

Angular Displacement

If the body of Fig. 10-3 rotates about the rotation axis as in Fig. 10-4, changing the angular position of the reference line from θ_1 to θ_2, the body undergoes an **angular displacement** $\Delta\theta$ given by

$$\Delta\theta = \theta_2 - \theta_1. \tag{10-4}$$

This definition of angular displacement holds not only for the rigid body as a whole but also for *every particle within that body.*

Clocks Are Negative. If a body is in translational motion along an x axis, its displacement Δx is either positive or negative, depending on whether the body is moving in the positive or negative direction of the axis. Similarly, the angular displacement $\Delta\theta$ of a rotating body is either positive or negative, according to the following rule:

An angular displacement in the counterclockwise direction is positive, and one in the clockwise direction is negative.

The phrase "*clocks are negative*" can help you remember this rule (they certainly are negative when their alarms sound off early in the morning).

Checkpoint 1

A disk can rotate about its central axis like a merry-go-round. Which of the following pairs of values for its initial and final angular positions, respectively, give a negative angular displacement: (a) −3 rad, +5 rad, (b) −3 rad, −7 rad, (c) 7 rad, −3 rad?

Angular Velocity

Suppose that our rotating body is at angular position θ_1 at time t_1 and at angular position θ_2 at time t_2 as in Fig. 10-4. We define the **average angular velocity** of the body in the time interval Δt from t_1 to t_2 to be

$$\omega_{\text{avg}} = \frac{\theta_2 - \theta_1}{t_2 - t_1} = \frac{\Delta\theta}{\Delta t}, \tag{10-5}$$

where $\Delta\theta$ is the angular displacement during Δt (ω is the lowercase omega).

IPR2024-01137
CamelBak EX 2023
Page 30 of 96



This change in the angle of the reference line (which is part of the body) is equal to the angular displacement of the body itself during this time interval.

Figure 10-4 The reference line of the rigid body of Figs. 10-2 and 10-3 is at angular position θ_1 at time t_1 and at angular position θ_2 at a later time t_2. The quantity $\Delta\theta\,(=\theta_2-\theta_1)$ is the angular displacement that occurs during the interval $\Delta t\,(=t_2-t_1)$. The body itself is not shown.

The **(instantaneous) angular velocity** ω, with which we shall be most concerned, is the limit of the ratio in Eq. 10-5 as Δt approaches zero. Thus,

$$\omega = \lim_{\Delta t \to 0} \frac{\Delta\theta}{\Delta t} = \frac{d\theta}{dt}. \tag{10-6}$$

If we know $\theta(t)$, we can find the angular velocity ω by differentiation.

Equations 10-5 and 10-6 hold not only for the rotating rigid body as a whole but also for *every particle of that body* because the particles are all locked together. The unit of angular velocity is commonly the radian per second (rad/s) or the revolution per second (rev/s). Another measure of angular velocity was used during at least the first three decades of rock: Music was produced by vinyl (phonograph) records that were played on turntables at "$33\frac{1}{3}$ rpm" or "45 rpm," meaning at $33\frac{1}{3}$ rev/min or 45 rev/min.

If a particle moves in translation along an x axis, its linear velocity v is either positive or negative, depending on its direction along the axis. Similarly, the angular velocity ω of a rotating rigid body is either positive or negative, depending on whether the body is rotating counterclockwise (positive) or clockwise (negative). ("Clocks are negative" still works.) The magnitude of an angular velocity is called the **angular speed,** which is also represented with ω.

Angular Acceleration

If the angular velocity of a rotating body is not constant, then the body has an angular acceleration. Let ω_2 and ω_1 be its angular velocities at times t_2 and t_1, respectively. The **average angular acceleration** of the rotating body in the interval from t_1 to t_2 is defined as

$$\alpha_{avg} = \frac{\omega_2 - \omega_1}{t_2 - t_1} = \frac{\Delta\omega}{\Delta t}, \tag{10-7}$$

in which $\Delta\omega$ is the change in the angular velocity that occurs during the time interval Δt. The **(instantaneous) angular acceleration** α, with which we shall be most concerned, is the limit of this quantity as Δt approaches zero. Thus,

$$\alpha = \lim_{\Delta t \to 0} \frac{\Delta\omega}{\Delta t} = \frac{d\omega}{dt}. \tag{10-8}$$

As the name suggests, this is the angular acceleration of the body at a given instant. Equations 10-7 and 10-8 also hold for *every particle of that body.* The unit of angular acceleration is commonly the radian per second-squared (rad/s^2) or the revolution per second-squared (rev/s^2).

IPR2024-01137
CamelBak EX 2023
Page 31 of 96

Sample Problem 10.01 Angular velocity derived from angular position

The disk in Fig. 10-5*a* is rotating about its central axis like a merry-go-round. The angular position $\theta(t)$ of a reference line on the disk is given by

$$\theta = -1.00 - 0.600t + 0.250t^2, \qquad (10\text{-}9)$$

with t in seconds, θ in radians, and the zero angular position as indicated in the figure. (If you like, you can translate all this into Chapter 2 notation by momentarily dropping the word "angular" from "angular position" and replacing the symbol θ with the symbol x. What you then have is an equation that gives the position as a function of time, for the one-dimensional motion of Chapter 2.)

(a) Graph the angular position of the disk versus time from $t = -3.0$ s to $t = 5.4$ s. Sketch the disk and its angular position reference line at $t = -2.0$ s, 0 s, and 4.0 s, and when the curve crosses the t axis.

KEY IDEA

The angular position of the disk is the angular position $\theta(t)$ of its reference line, which is given by Eq. 10-9 as a function of time t. So we graph Eq. 10-9; the result is shown in Fig. 10-5*b*.

Calculations: To sketch the disk and its reference line at a particular time, we need to determine θ for that time. To do so, we substitute the time into Eq. 10-9. For $t = -2.0$ s, we get

$$\theta = -1.00 - (0.600)(-2.0) + (0.250)(-2.0)^2$$

$$= 1.2 \text{ rad} = 1.2 \text{ rad} \frac{360^\circ}{2\pi \text{ rad}} = 69^\circ.$$

This means that at $t = -2.0$ s the reference line on the disk is rotated counterclockwise from the zero position by angle 1.2 rad = 69° (counterclockwise because θ is positive). Sketch 1 in Fig. 10-5*b* shows this position of the reference line.

Similarly, for $t = 0$, we find $\theta = -1.00$ rad = −57°, which means that the reference line is rotated clockwise from the zero angular position by 1.0 rad, or 57°, as shown in sketch 3. For $t = 4.0$ s, we find $\theta = 0.60$ rad = 34° (sketch 5). Drawing sketches for when the curve crosses the t axis is easy, because then $\theta = 0$ and the reference line is momentarily aligned with the zero angular position (sketches 2 and 4).

(b) At what time t_{min} does $\theta(t)$ reach the minimum value shown in Fig. 10-5*b*? What is that minimum value?

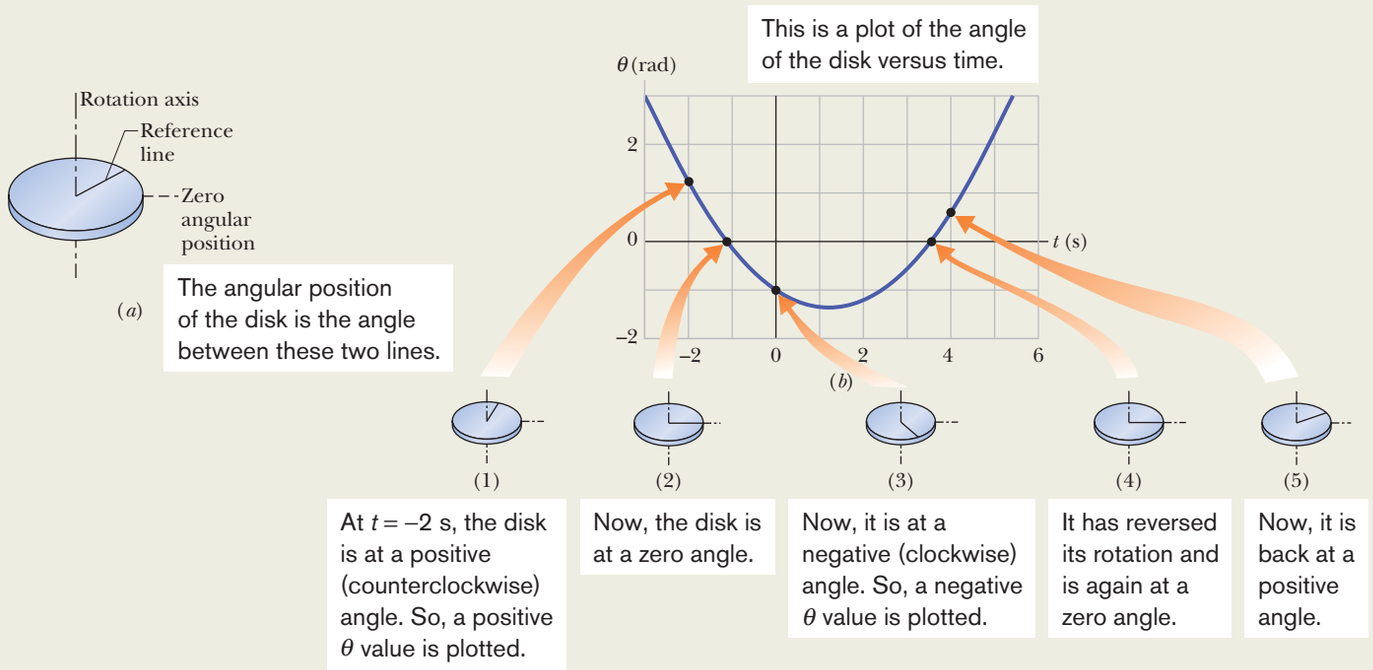

Figure 10-5 (*a*) A rotating disk. (*b*) A plot of the disk's angular position $\theta(t)$. Five sketches indicate the angular position of the reference line on the disk for five points on the curve. (*c*) A plot of the disk's angular velocity $\omega(t)$. Positive values of ω correspond to counterclockwise rotation, and negative values to clockwise rotation.

IPR2024-01137
CamelBak EX 2023
Page 32 of 96

KEY IDEA

To find the extreme value (here the minimum) of a function, we take the first derivative of the function and set the result to zero.

Calculations: The first derivative of $\theta(t)$ is

$$\frac{d\theta}{dt} = -0.600 + 0.500t. \qquad (10\text{-}10)$$

Setting this to zero and solving for t give us the time at which $\theta(t)$ is minimum:

$$t_{min} = 1.20 \text{ s}. \qquad \text{(Answer)}$$

To get the minimum value of θ, we next substitute t_{min} into Eq. 10-9, finding

$$\theta = -1.36 \text{ rad} \approx -77.9°. \qquad \text{(Answer)}$$

This *minimum* of $\theta(t)$ (the bottom of the curve in Fig. 10-5*b*) corresponds to the *maximum clockwise* rotation of the disk from the zero angular position, somewhat more than is shown in sketch 3.

(c) Graph the angular velocity ω of the disk versus time from $t = -3.0$ s to $t = 6.0$ s. Sketch the disk and indicate the direction of turning and the sign of ω at $t = -2.0$ s, 4.0 s, and t_{min}.

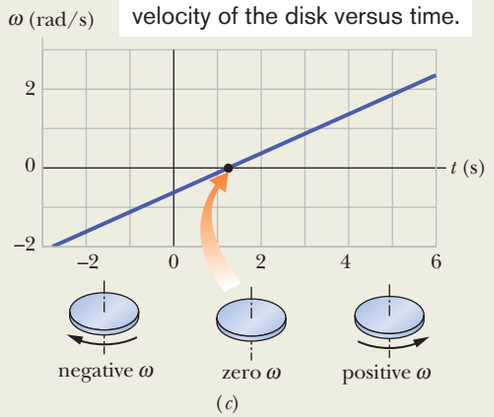

The angular velocity is initially negative and slowing, then momentarily zero during reversal, and then positive and increasing.

KEY IDEA

From Eq. 10-6, the angular velocity ω is equal to $d\theta/dt$ as given in Eq. 10-10. So, we have

$$\omega = -0.600 + 0.500t. \qquad (10\text{-}11)$$

The graph of this function $\omega(t)$ is shown in Fig. 10-5*c*. Because the function is linear, the plot is a straight line. The slope is 0.500 rad/s^2 and the intercept with the vertical axis (not shown) is -0.600 rad/s.

Calculations: To sketch the disk at $t = -2.0$ s, we substitute that value into Eq. 10-11, obtaining

$$\omega = -1.6 \text{ rad/s}. \qquad \text{(Answer)}$$

The minus sign here tells us that at $t = -2.0$ s, the disk is turning clockwise (as indicated by the left-hand sketch in Fig. 10-5*c*).

Substituting $t = 4.0$ s into Eq. 10-11 gives us

$$\omega = 1.4 \text{ rad/s}. \qquad \text{(Answer)}$$

The implied plus sign tells us that now the disk is turning counterclockwise (the right-hand sketch in Fig. 10-5*c*).

For t_{min}, we already know that $d\theta/dt = 0$. So, we must also have $\omega = 0$. That is, the disk momentarily stops when the reference line reaches the minimum value of θ in Fig. 10-5*b*, as suggested by the center sketch in Fig. 10-5*c*. On the graph of ω versus t in Fig. 10-5*c*, this momentary stop is the zero point where the plot changes from the negative clockwise motion to the positive counterclockwise motion.

(d) Use the results in parts (a) through (c) to describe the motion of the disk from $t = -3.0$ s to $t = 6.0$ s.

Description: When we first observe the disk at $t = -3.0$ s, it has a positive angular position and is turning clockwise but slowing. It stops at angular position $\theta = -1.36$ rad and then begins to turn counterclockwise, with its angular position eventually becoming positive again.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

IPR2024-01137
CamelBak EX 2023
Page 33 of 96

Sample Problem 10.02 Angular velocity derived from angular acceleration

A child's top is spun with angular acceleration

$$\alpha = 5t^3 - 4t,$$

with t in seconds and α in radians per second-squared. At $t = 0$, the top has angular velocity 5 rad/s, and a reference line on it is at angular position $\theta = 2$ rad.

(a) Obtain an expression for the angular velocity $\omega(t)$ of the top. That is, find an expression that explicitly indicates how the angular velocity depends on time. (We can tell that there *is* such a dependence because the top is undergoing an angular acceleration, which means that its angular velocity *is* changing.)

KEY IDEA

By definition, $\alpha(t)$ is the derivative of $\omega(t)$ with respect to time. Thus, we can find $\omega(t)$ by integrating $\alpha(t)$ with respect to time.

Calculations: Equation 10-8 tells us

$$d\omega = \alpha\, dt,$$

so

$$\int d\omega = \int \alpha\, dt.$$

From this we find

$$\omega = \int (5t^3 - 4t)\, dt = \tfrac{5}{4}t^4 - \tfrac{4}{2}t^2 + C.$$

To evaluate the constant of integration C, we note that $\omega = 5$ rad/s at $t = 0$. Substituting these values in our expression for ω yields

$$5 \text{ rad/s} = 0 - 0 + C,$$

so $C = 5$ rad/s. Then

$$\omega = \tfrac{5}{4}t^4 - 2t^2 + 5. \qquad \text{(Answer)}$$

(b) Obtain an expression for the angular position $\theta(t)$ of the top.

KEY IDEA

By definition, $\omega(t)$ is the derivative of $\theta(t)$ with respect to time. Therefore, we can find $\theta(t)$ by integrating $\omega(t)$ with respect to time.

Calculations: Since Eq. 10-6 tells us that

$$d\theta = \omega\, dt,$$

we can write

$$\theta = \int \omega\, dt = \int (\tfrac{5}{4}t^4 - 2t^2 + 5)\, dt$$
$$= \tfrac{1}{4}t^5 - \tfrac{2}{3}t^3 + 5t + C'$$
$$= \tfrac{1}{4}t^5 - \tfrac{2}{3}t^3 + 5t + 2, \qquad \text{(Answer)}$$

where C' has been evaluated by noting that $\theta = 2$ rad at $t = 0$.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

Are Angular Quantities Vectors?

We can describe the position, velocity, and acceleration of a single particle by means of vectors. If the particle is confined to a straight line, however, we do not really need vector notation. Such a particle has only two directions available to it, and we can indicate these directions with plus and minus signs.

In the same way, a rigid body rotating about a fixed axis can rotate only clockwise or counterclockwise as seen along the axis, and again we can select between the two directions by means of plus and minus signs. The question arises: "Can we treat the angular displacement, velocity, and acceleration of a rotating body as vectors?" The answer is a qualified "yes" (see the caution below, in connection with angular displacements).

Angular Velocities. Consider the angular velocity. Figure 10-6*a* shows a vinyl record rotating on a turntable. The record has a constant angular speed ω (= $33\frac{1}{3}$ rev/min) in the clockwise direction. We can represent its angular velocity as a vector $\vec{\omega}$ pointing along the axis of rotation, as in Fig. 10-6*b*. Here's how: We choose the length of this vector according to some convenient scale, for example, with 1 cm corresponding to 10 rev/min. Then we establish a direction for the vector $\vec{\omega}$ by using a **right-hand rule,** as Fig. 10-6*c* shows: Curl your right hand about the rotating record, your fingers pointing *in the direction of rotation.* Your extended thumb will then point in the direction of the angular velocity vector. If the record were to rotate in the opposite sense, the right-

IPR2024-01137
CamelBak EX 2023
Page 34 of 96

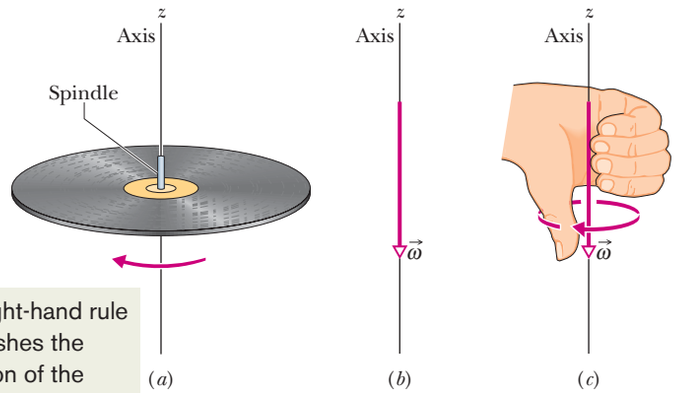

This right-hand rule establishes the direction of the angular velocity vector.

Figure 10-6 (*a*) A record rotating about a vertical axis that coincides with the axis of the spindle. (*b*) The angular velocity of the rotating record can be represented by the vector $\vec{\omega}$, lying along the axis and pointing down, as shown. (*c*) We establish the direction of the angular velocity vector as downward by using a right-hand rule. When the fingers of the right hand curl around the record and point the way it is moving, the extended thumb points in the direction of $\vec{\omega}$.

hand rule would tell you that the angular velocity vector then points in the opposite direction.

It is not easy to get used to representing angular quantities as vectors. We instinctively expect that something should be moving *along* the direction of a vector. That is not the case here. Instead, something (the rigid body) is rotating *around* the direction of the vector. In the world of pure rotation, a vector defines an axis of rotation, not a direction in which something moves. Nonetheless, the vector also defines the motion. Furthermore, it obeys all the rules for vector manipulation discussed in Chapter 3. The angular acceleration $\vec{\alpha}$ is another vector, and it too obeys those rules.

In this chapter we consider only rotations that are about a fixed axis. For such situations, we need not consider vectors—we can represent angular velocity with ω and angular acceleration with α, and we can indicate direction with an implied plus sign for counterclockwise or an explicit minus sign for clockwise.

Angular Displacements. Now for the caution: Angular *displacements* (unless they are very small) *cannot* be treated as vectors. Why not? We can certainly give them both magnitude and direction, as we did for the angular velocity vector in Fig. 10-6. However, to be represented as a vector, a quantity must *also* obey the rules of vector addition, one of which says that if you add two vectors, the order in which you add them does not matter. Angular displacements fail this test.

Figure 10-7 gives an example. An initially horizontal book is given two 90° angular displacements, first in the order of Fig. 10-7*a* and then in the order of Fig. 10-7*b*. Although the two angular displacements are identical, their order is not, and the book ends up with different orientations. Here's another example. Hold your right arm downward, palm toward your thigh. Keeping your wrist rigid, (1) lift the arm forward until it is horizontal, (2) move it horizontally until it points toward the right, and (3) then bring it down to your side. Your palm faces forward. If you start over, but reverse the steps, which way does your palm end up facing? From either example, we must conclude that the addition of two angular displacements depends on their order and they cannot be vectors.

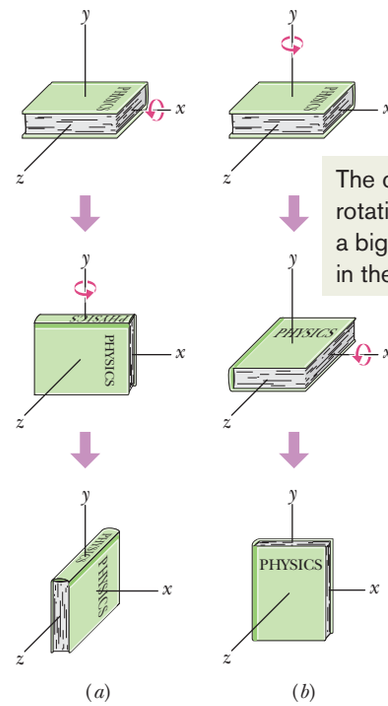

The order of the rotations makes a big difference in the result.

Figure 10-7 (*a*) From its initial position, at the top, the book is given two successive 90° rotations, first about the (horizontal) *x* axis and then about the (vertical) *y* axis. (*b*) The book is given the same rotations, but in the reverse order.

IPR2024-01137
CamelBak EX 2023
Page 35 of 96

10-2 ROTATION WITH CONSTANT ANGULAR ACCELERATION

Learning Objective

After reading this module, you should be able to . . .

10.14 For constant angular acceleration, apply the relationships between angular position, angular displacement, angular velocity, angular acceleration, and elapsed time (Table 10-1).

Key Idea

● Constant angular acceleration (α = constant) is an important special case of rotational motion. The appropriate kinematic equations are

$$\begin{aligned}
\omega &= \omega_0 + \alpha t, \\
\theta - \theta_0 &= \omega_0 t + \tfrac{1}{2}\alpha t^2, \\
\omega^2 &= \omega_0^2 + 2\alpha(\theta - \theta_0), \\
\theta - \theta_0 &= \tfrac{1}{2}(\omega_0 + \omega)t, \\
\theta - \theta_0 &= \omega t - \tfrac{1}{2}\alpha t^2.
\end{aligned}$$

Rotation with Constant Angular Acceleration

In pure translation, motion with a *constant linear acceleration* (for example, that of a falling body) is an important special case. In Table 2-1, we displayed a series of equations that hold for such motion.

In pure rotation, the case of *constant angular acceleration* is also important, and a parallel set of equations holds for this case also. We shall not derive them here, but simply write them from the corresponding linear equations, substituting equivalent angular quantities for the linear ones. This is done in Table 10-1, which lists both sets of equations (Eqs. 2-11 and 2-15 to 2-18; 10-12 to 10-16).

Recall that Eqs. 2-11 and 2-15 are basic equations for constant linear acceleration—the other equations in the Linear list can be derived from them. Similarly, Eqs. 10-12 and 10-13 are the basic equations for constant angular acceleration, and the other equations in the Angular list can be derived from them. To solve a simple problem involving constant angular acceleration, you can usually use an equation from the Angular list (*if* you have the list). Choose an equation for which the only unknown variable will be the variable requested in the problem. A better plan is to remember only Eqs. 10-12 and 10-13, and then solve them as simultaneous equations whenever needed.

Checkpoint 2

In four situations, a rotating body has angular position $\theta(t)$ given by (a) $\theta = 3t - 4$, (b) $\theta = -5t^3 + 4t^2 + 6$, (c) $\theta = 2/t^2 - 4/t$, and (d) $\theta = 5t^2 - 3$. To which situations do the angular equations of Table 10-1 apply?

Table 10-1 Equations of Motion for Constant Linear Acceleration and for Constant Angular Acceleration

Equation Number	Linear Equation	Missing Variable		Angular Equation	Equation Number
(2-11)	$v = v_0 + at$	$x - x_0$	$\theta - \theta_0$	$\omega = \omega_0 + \alpha t$	(10-12)
(2-15)	$x - x_0 = v_0 t + \frac{1}{2}at^2$	v	ω	$\theta - \theta_0 = \omega_0 t + \frac{1}{2}\alpha t^2$	(10-13)
(2-16)	$v^2 = v_0^2 + 2a(x - x_0)$	t	t	$\omega^2 = \omega_0^2 + 2\alpha(\theta - \theta_0)$	(10-14)
(2-17)	$x - x_0 = \frac{1}{2}(v_0 + v)t$	a	α	$\theta - \theta_0 = \frac{1}{2}(\omega_0 + \omega)t$	(10-15)
(2-18)	$x - x_0 = vt - \frac{1}{2}at^2$	v_0	ω_0	$\theta - \theta_0 = \omega t - \frac{1}{2}\alpha t^2$	(10-16)

IPR2024-01137
CamelBak EX 2023
Page 36 of 96

Sample Problem 10.03 Constant angular acceleration, grindstone

A grindstone (Fig. 10-8) rotates at constant angular acceleration $\alpha = 0.35$ rad/s^2. At time $t = 0$, it has an angular velocity of $\omega_0 = -4.6$ rad/s and a reference line on it is horizontal, at the angular position $\theta_0 = 0$.

(a) At what time after $t = 0$ is the reference line at the angular position $\theta = 5.0$ rev?

KEY IDEA

The angular acceleration is constant, so we can use the rotation equations of Table 10-1. We choose Eq. 10-13,

$$\theta - \theta_0 = \omega_0 t + \tfrac{1}{2}\alpha t^2,$$

because the only unknown variable it contains is the desired time t.

Calculations: Substituting known values and setting $\theta_0 = 0$ and $\theta = 5.0$ rev $= 10\pi$ rad give us

$$10\pi \text{ rad} = (-4.6 \text{ rad/s})t + \tfrac{1}{2}(0.35 \text{ rad/s}^2)t^2.$$

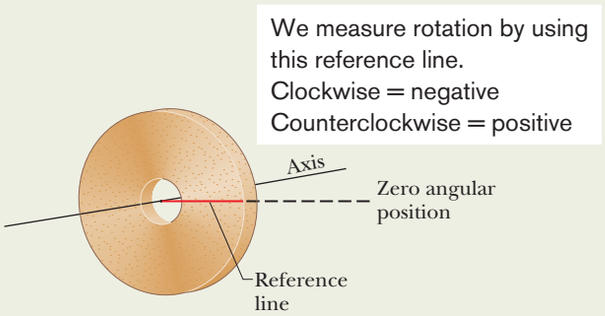

Figure 10-8 A grindstone. At $t = 0$ the reference line (which we imagine to be marked on the stone) is horizontal.

(We converted 5.0 rev to 10π rad to keep the units consistent.) Solving this quadratic equation for t, we find

$$t = 32 \text{ s.} \qquad \text{(Answer)}$$

Now notice something a bit strange. We first see the wheel when it is rotating in the negative direction and through the $\theta = 0$ orientation. Yet, we just found out that 32 s later it is at the positive orientation of $\theta = 5.0$ rev. What happened in that time interval so that it could be at a positive orientation?

(b) Describe the grindstone's rotation between $t = 0$ and $t = 32$ s.

Description: The wheel is initially rotating in the negative (clockwise) direction with angular velocity $\omega_0 = -4.6$ rad/s, but its angular acceleration α is positive. This initial opposition of the signs of angular velocity and angular acceleration means that the wheel slows in its rotation in the negative direction, stops, and then reverses to rotate in the positive direction. After the reference line comes back through its initial orientation of $\theta = 0$, the wheel turns an additional 5.0 rev by time $t = 32$ s.

(c) At what time t does the grindstone momentarily stop?

Calculation: We again go to the table of equations for constant angular acceleration, and again we need an equation that contains only the desired unknown variable t. However, now the equation must also contain the variable ω, so that we can set it to 0 and then solve for the corresponding time t. We choose Eq. 10-12, which yields

$$t = \frac{\omega - \omega_0}{\alpha} = \frac{0 - (-4.6 \text{ rad/s})}{0.35 \text{ rad/s}^2} = 13 \text{ s.} \qquad \text{(Answer)}$$

Sample Problem 10.04 Constant angular acceleration, riding a Rotor

While you are operating a Rotor (a large, vertical, rotating cylinder found in amusement parks), you spot a passenger in acute distress and decrease the angular velocity of the cylinder from 3.40 rad/s to 2.00 rad/s in 20.0 rev, at constant angular acceleration. (The passenger is obviously more of a "translation person" than a "rotation person.")

(a) What is the constant angular acceleration during this decrease in angular speed?

KEY IDEA

Because the cylinder's angular acceleration is constant, we can relate it to the angular velocity and angular displacement via the basic equations for constant angular acceleration (Eqs. 10-12 and 10-13).

Calculations: Let's first do a quick check to see if we can solve the basic equations. The initial angular velocity is $\omega_0 = 3.40$ rad/s, the angular displacement is $\theta - \theta_0 = 20.0$ rev, and the angular velocity at the end of that displacement is $\omega = 2.00$ rad/s. In addition to the angular acceleration α that we want, both basic equations also contain time t, which we do not necessarily want.

To eliminate the unknown t, we use Eq. 10-12 to write

$$t = \frac{\omega - \omega_0}{\alpha},$$

which we then substitute into Eq. 10-13 to write

$$\theta - \theta_0 = \omega_0\left(\frac{\omega - \omega_0}{\alpha}\right) + \tfrac{1}{2}\alpha\left(\frac{\omega - \omega_0}{\alpha}\right)^2.$$

Solving for α, substituting known data, and converting 20 rev to 125.7 rad, we find

$$\alpha = \frac{\omega^2 - \omega_0^2}{2(\theta - \theta_0)} = \frac{(2.00 \text{ rad/s})^2 - (3.40 \text{ rad/s})^2}{2(125.7 \text{ rad})}$$
$$= -0.0301 \text{ rad/s}^2. \qquad \text{(Answer)}$$

IPR2024-01137
CamelBak EX 2023
Page 37 of 96

(b) How much time did the speed decrease take?

Calculation: Now that we know α, we can use Eq. 10-12 to solve for t:

$$t = \frac{\omega - \omega_0}{\alpha} = \frac{2.00 \text{ rad/s} - 3.40 \text{ rad/s}}{-0.0301 \text{ rad/s}^2}$$
$$= 46.5 \text{ s.} \quad \text{(Answer)}$$

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

10-3 RELATING THE LINEAR AND ANGULAR VARIABLES

Learning Objectives

After reading this module, you should be able to . . .

10.15 For a rigid body rotating about a fixed axis, relate the angular variables of the body (angular position, angular velocity, and angular acceleration) and the linear variables of a particle on the body (position, velocity, and acceleration) at any given radius.

10.16 Distinguish between tangential acceleration and radial acceleration, and draw a vector for each in a sketch of a particle on a body rotating about an axis, for both an increase in angular speed and a decrease.

Key Ideas

- A point in a rigid rotating body, at a perpendicular distance r from the rotation axis, moves in a circle with radius r. If the body rotates through an angle θ, the point moves along an arc with length s given by

$$s = \theta r \quad \text{(radian measure)},$$

where θ is in radians.

- The linear velocity $\vec{v}$ of the point is tangent to the circle; the point's linear speed v is given by

$$v = \omega r \quad \text{(radian measure)},$$

where ω is the angular speed (in radians per second) of the body, and thus also the point.

- The linear acceleration $\vec{a}$ of the point has both tangential and radial components. The tangential component is

$$a_t = \alpha r \quad \text{(radian measure)},$$

where α is the magnitude of the angular acceleration (in radians per second-squared) of the body. The radial component of $\vec{a}$ is

$$a_r = \frac{v^2}{r} = \omega^2 r \quad \text{(radian measure)}.$$

- If the point moves in uniform circular motion, the period T of the motion for the point and the body is

$$T = \frac{2\pi r}{v} = \frac{2\pi}{\omega} \quad \text{(radian measure)}.$$

Relating the Linear and Angular Variables

In Module 4-5, we discussed uniform circular motion, in which a particle travels at constant linear speed v along a circle and around an axis of rotation. When a rigid body, such as a merry-go-round, rotates around an axis, each particle in the body moves in its own circle around that axis. Since the body is rigid, all the particles make one revolution in the same amount of time; that is, they all have the same angular speed ω.

However, the farther a particle is from the axis, the greater the circumference of its circle is, and so the faster its linear speed v must be. You can notice this on a merry-go-round. You turn with the same angular speed ω regardless of your distance from the center, but your linear speed v increases noticeably if you move to the outside edge of the merry-go-round.

We often need to relate the linear variables s, v, and a for a particular point in a rotating body to the angular variables θ, ω, and α for that body. The two sets of variables are related by r, the *perpendicular distance* of the point from the rotation axis. This perpendicular distance is the distance between the point and the rotation axis, measured along a perpendicular to the axis. It is also the radius r of the circle traveled by the point around the axis of rotation.

IPR2024-01137
CamelBak EX 2023
Page 38 of 96

The Position

If a reference line on a rigid body rotates through an angle θ, a point within the body at a position r from the rotation axis moves a distance s along a circular arc, where s is given by Eq. 10-1:

$$s = \theta r \quad \text{(radian measure)}. \tag{10-17}$$

This is the first of our linear–angular relations. *Caution:* The angle θ here must be measured in radians because Eq. 10-17 is itself the definition of angular measure in radians.

The Speed

Differentiating Eq. 10-17 with respect to time—with r held constant—leads to

$$\frac{ds}{dt} = \frac{d\theta}{dt} r.$$

However, ds/dt is the linear speed (the magnitude of the linear velocity) of the point in question, and $d\theta/dt$ is the angular speed ω of the rotating body. So

$$v = \omega r \quad \text{(radian measure)}. \tag{10-18}$$

Caution: The angular speed ω must be expressed in radian measure.

Equation 10-18 tells us that since all points within the rigid body have the same angular speed ω, points with greater radius r have greater linear speed v. Figure 10-9*a* reminds us that the linear velocity is always tangent to the circular path of the point in question.

If the angular speed ω of the rigid body is constant, then Eq. 10-18 tells us that the linear speed v of any point within it is also constant. Thus, each point within the body undergoes uniform circular motion. The period of revolution T for the motion of each point and for the rigid body itself is given by Eq. 4-35:

$$T = \frac{2\pi r}{v}. \tag{10-19}$$

This equation tells us that the time for one revolution is the distance $2\pi r$ traveled in one revolution divided by the speed at which that distance is traveled. Substituting for v from Eq. 10-18 and canceling r, we find also that

$$T = \frac{2\pi}{\omega} \quad \text{(radian measure)}. \tag{10-20}$$

This equivalent equation says that the time for one revolution is the angular distance 2π rad traveled in one revolution divided by the angular speed (or rate) at which that angle is traveled.

The Acceleration

Differentiating Eq. 10-18 with respect to time—again with r held constant—leads to

$$\frac{dv}{dt} = \frac{d\omega}{dt} r. \tag{10-21}$$

Here we run up against a complication. In Eq. 10-21, dv/dt represents only the part of the linear acceleration that is responsible for changes in the *magnitude* v of the linear velocity $\vec{v}$. Like $\vec{v}$, that part of the linear acceleration is tangent to the path of the point in question. We call it the *tangential component* a_t of the linear acceleration of the point, and we write

$$a_t = \alpha r \quad \text{(radian measure)}, \tag{10-22}$$

The velocity vector is always tangent to this circle around the rotation axis.

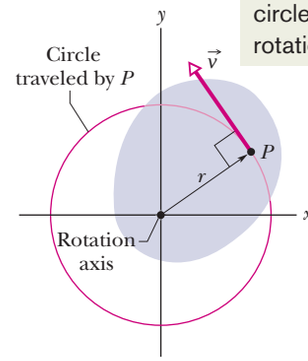

(*a*)

The acceleration always has a radial (centripetal) component and may have a tangential component.

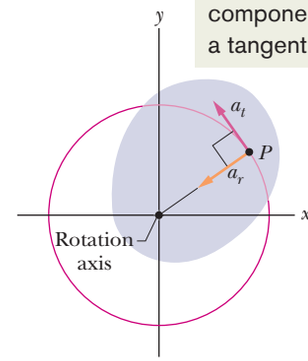

(*b*)

Figure 10-9 The rotating rigid body of Fig. 10-2, shown in cross section viewed from above. Every point of the body (such as P) moves in a circle around the rotation axis. (*a*) The linear velocity $\vec{v}$ of every point is tangent to the circle in which the point moves. (*b*) The linear acceleration $\vec{a}$ of the point has (in general) two components: tangential a_t and radial a_r.

IPR2024-01137
CamelBak EX 2023
Page 39 of 96

where $\alpha = d\omega/dt$. *Caution:* The angular acceleration α in Eq. 10-22 must be expressed in radian measure.

In addition, as Eq. 4-34 tells us, a particle (or point) moving in a circular path has a *radial component* of linear acceleration, $a_r = v^2/r$ (directed radially inward), that is responsible for changes in the *direction* of the linear velocity $\vec{v}$. By substituting for v from Eq. 10-18, we can write this component as

$$a_r = \frac{v^2}{r} = \omega^2 r \quad \text{(radian measure).} \tag{10-23}$$

Thus, as Fig. 10-9*b* shows, the linear acceleration of a point on a rotating rigid body has, in general, two components. The radially inward component a_r (given by Eq. 10-23) is present whenever the angular velocity of the body is not zero. The tangential component a_t (given by Eq. 10-22) is present whenever the angular acceleration is not zero.

Checkpoint 3

A cockroach rides the rim of a rotating merry-go-round. If the angular speed of this system (*merry-go-round + cockroach*) is constant, does the cockroach have (a) radial acceleration and (b) tangential acceleration? If ω is decreasing, does the cockroach have (c) radial acceleration and (d) tangential acceleration?

Sample Problem 10.05 Designing The Giant Ring, a large-scale amusement park ride

We are given the job of designing a large horizontal ring that will rotate around a vertical axis and that will have a radius of $r = 33.1$ m (matching that of Beijing's The Great Observation Wheel, the largest Ferris wheel in the world). Passengers will enter through a door in the outer wall of the ring and then stand next to that wall (Fig. 10-10*a*). We decide that for the time interval $t = 0$ to $t = 2.30$ s, the angular position $\theta(t)$ of a reference line on the ring will be given by

$$\theta = ct^3, \tag{10-24}$$

with $c = 6.39 \times 10^{-2}$ rad/s^3. After $t = 2.30$ s, the angular speed will be held constant until the end of the ride. Once the ring begins to rotate, the floor of the ring will drop away from the riders but the riders will not fall—indeed, they feel as though they are pinned to the wall. For the time $t = 2.20$ s, let's determine a rider's angular speed ω, linear speed v, angular acceleration α, tangential acceleration a_t, radial acceleration a_r, and acceleration $\vec{a}$.



Figure 10-10 (*a*) Overhead view of a passenger ready to ride The Giant Ring. (*b*) The radial and tangential acceleration components of the (full) acceleration.

KEY IDEAS

(1) The angular speed ω is given by Eq. 10-6 ($\omega = d\theta/dt$). (2) The linear speed v (along the circular path) is related to the angular speed (around the rotation axis) by Eq. 10-18 ($v = \omega r$). (3) The angular acceleration α is given by Eq. 10-8 ($\alpha = d\omega/dt$). (4) The tangential acceleration a_t (along the circular path) is related to the angular acceleration (around the rotation axis) by Eq. 10-22 ($a_t = \alpha r$). (5) The radial acceleration a_r is given Eq. 10-23 ($a_r = \omega^2 r$). (6) The tangential and radial accelerations are the (perpendicular) components of the (full) acceleration $\vec{a}$.

Calculations: Let's go through the steps. We first find the angular velocity by taking the time derivative of the given angular position function and then substituting the given time of $t = 2.20$ s:

$$\omega = \frac{d\theta}{dt} = \frac{d}{dt}(ct^3) = 3ct^2 \tag{10-25}$$
$$= 3(6.39 \times 10^{-2}\ \text{rad/s}^3)(2.20\ \text{s})^2$$
$$= 0.928\ \text{rad/s}. \quad \text{(Answer)}$$

From Eq. 10-18, the linear speed just then is

$$v = \omega r = 3ct^2 r \tag{10-26}$$
$$= 3(6.39 \times 10^{-2}\ \text{rad/s}^3)(2.20\ \text{s})^2(33.1\ \text{m})$$
$$= 30.7\ \text{m/s}. \quad \text{(Answer)}$$

IPR2024-01137
CamelBak EX 2023
Page 40 of 96

Although this is fast (111 km/h or 68.7 mi/h), such speeds are common in amusement parks and not alarming because (as mentioned in Chapter 2) your body reacts to accelerations but not to velocities. (It is an accelerometer, not a speedometer.) From Eq. 10-26 we see that the linear speed is increasing as the square of the time (but this increase will cut off at $t = 2.30$ s).

Next, let's tackle the angular acceleration by taking the time derivative of Eq. 10-25:

$$\alpha = \frac{d\omega}{dt} = \frac{d}{dt}(3ct^2) = 6ct$$
$$= 6(6.39 \times 10^{-2}\ \text{rad/s}^3)(2.20\ \text{s}) = 0.843\ \text{rad/s}^2. \quad \text{(Answer)}$$

The tangential acceleration then follows from Eq. 10-22:

$$a_t = \alpha r = 6ctr \quad (10\text{-}27)$$
$$= 6(6.39 \times 10^{-2}\ \text{rad/s}^3)(2.20\ \text{s})(33.1\ \text{m})$$
$$= 27.91\ \text{m/s}^2 \approx 27.9\ \text{m/s}^2, \quad \text{(Answer)}$$

or $2.8g$ (which is reasonable and a bit exciting). Equation 10-27 tells us that the tangential acceleration is increasing with time (but it will cut off at $t = 2.30$ s). From Eq. 10-23, we write the radial acceleration as

$$a_r = \omega^2 r.$$

Substituting from Eq. 10-25 leads us to

$$a_r = (3ct^2)^2 r = 9c^2t^4 r \quad (10\text{-}28)$$
$$= 9(6.39 \times 10^{-2}\ \text{rad/s}^3)^2(2.20\ \text{s})^4(33.1\ \text{m})$$
$$= 28.49\ \text{m/s}^2 \approx 28.5\ \text{m/s}^2, \quad \text{(Answer)}$$

or $2.9g$ (which is also reasonable and a bit exciting).

The radial and tangential accelerations are perpendicular to each other and form the components of the rider's acceleration $\vec{a}$ (Fig. 10-10*b*). The magnitude of $\vec{a}$ is given by

$$a = \sqrt{a_r^2 + a_t^2} \quad (10\text{-}29)$$
$$= \sqrt{(28.49\ \text{m/s}^2)^2 + (27.91\ \text{m/s}^2)^2}$$
$$\approx 39.9\ \text{m/s}^2, \quad \text{(Answer)}$$

or $4.1g$ (which is really exciting!). All these values are acceptable.

To find the orientation of $\vec{a}$, we can calculate the angle θ shown in Fig. 10-10*b*:

$$\tan\theta = \frac{a_t}{a_r}.$$

However, instead of substituting our numerical results, let's use the algebraic results from Eqs. 10-27 and 10-28:

$$\theta = \tan^{-1}\left(\frac{6ctr}{9c^2t^4r}\right) = \tan^{-1}\left(\frac{2}{3ct^3}\right). \quad (10\text{-}30)$$

The big advantage of solving for the angle algebraically is that we can then see that the angle (1) does not depend on the ring's radius and (2) decreases as t goes from 0 to 2.20 s. That is, the acceleration vector $\vec{a}$ swings toward being radially inward because the radial acceleration (which depends on t^4) quickly dominates over the tangential acceleration (which depends on only t). At our given time $t = 2.20$ s, we have

$$\theta = \tan^{-1}\frac{2}{3(6.39 \times 10^{-2}\ \text{rad/s}^3)(2.20\ \text{s})^3} = 44.4°. \quad \text{(Answer)}$$

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

10-4 KINETIC ENERGY OF ROTATION

Learning Objectives

After reading this module, you should be able to . . .

10.17 Find the rotational inertia of a particle about a point.
10.18 Find the total rotational inertia of many particles moving around the same fixed axis.
10.19 Calculate the rotational kinetic energy of a body in terms of its rotational inertia and its angular speed.

Key Idea

● The kinetic energy K of a rigid body rotating about a fixed axis is given by

$$K = \tfrac{1}{2}I\omega^2 \quad \text{(radian measure)},$$

in which I is the rotational inertia of the body, defined as

$$I = \sum m_i r_i^2$$

for a system of discrete particles.

Kinetic Energy of Rotation

The rapidly rotating blade of a table saw certainly has kinetic energy due to that rotation. How can we express the energy? We cannot apply the familiar formula $K = \frac{1}{2}mv^2$ to the saw as a whole because that would give us the kinetic energy only of the saw's center of mass, which is zero.

IPR2024-01137
CamelBak EX 2023
Page 41 of 96

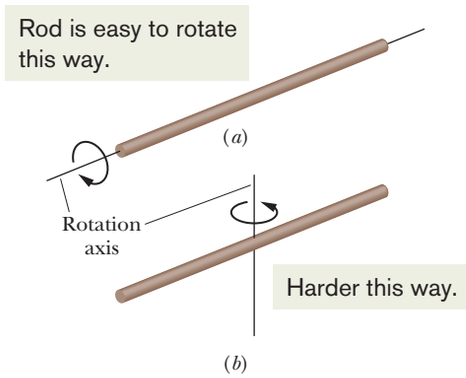

Figure 10-11 A long rod is much easier to rotate about (*a*) its central (longitudinal) axis than about (*b*) an axis through its center and perpendicular to its length. The reason for the difference is that the mass is distributed closer to the rotation axis in (*a*) than in (*b*).

Instead, we shall treat the table saw (and any other rotating rigid body) as a collection of particles with different speeds. We can then add up the kinetic energies of all the particles to find the kinetic energy of the body as a whole. In this way we obtain, for the kinetic energy of a rotating body,

$$K = \tfrac{1}{2}m_1v_1^2 + \tfrac{1}{2}m_2v_2^2 + \tfrac{1}{2}m_3v_3^2 + \cdots = \sum \tfrac{1}{2}m_iv_i^2, \tag{10-31}$$

in which m_i is the mass of the ith particle and v_i is its speed. The sum is taken over all the particles in the body.

The problem with Eq. 10-31 is that v_i is not the same for all particles. We solve this problem by substituting for v from Eq. 10-18 ($v = \omega r$), so that we have

$$K = \sum \tfrac{1}{2}m_i(\omega r_i)^2 = \tfrac{1}{2}\left(\sum m_i r_i^2\right)\omega^2, \tag{10-32}$$

in which ω *is* the same for all particles.

The quantity in parentheses on the right side of Eq. 10-32 tells us how the mass of the rotating body is distributed about its axis of rotation. We call that quantity the **rotational inertia** (or **moment of inertia**) I of the body with respect to the axis of rotation. It is a constant for a particular rigid body and a particular rotation axis. (*Caution:* That axis must always be specified if the value of I is to be meaningful.)

We may now write

$$I = \sum m_i r_i^2 \quad \text{(rotational inertia)} \tag{10-33}$$

and substitute into Eq. 10-32, obtaining

$$K = \tfrac{1}{2}I\omega^2 \quad \text{(radian measure)} \tag{10-34}$$

as the expression we seek. Because we have used the relation $v = \omega r$ in deriving Eq. 10-34, ω must be expressed in radian measure. The SI unit for I is the kilogram–square meter ($\text{kg}\cdot\text{m}^2$).

The Plan. If we have a few particles and a specified rotation axis, we find mr^2 for each particle and then add the results as in Eq. 10-33 to get the total rotational inertia I. If we want the total rotational kinetic energy, we can then substitute that I into Eq. 10-34. That is the plan for a few particles, but suppose we have a huge number of particles such as in a rod. In the next module we shall see how to handle such *continuous bodies* and do the calculation in only a few minutes.

Equation 10-34, which gives the kinetic energy of a rigid body in pure rotation, is the angular equivalent of the formula $K = \frac{1}{2}Mv_{\text{com}}^2$, which gives the kinetic energy of a rigid body in pure translation. In both formulas there is a factor of $\frac{1}{2}$. Where mass M appears in one equation, I (which involves both mass and its distribution) appears in the other. Finally, each equation contains as a factor the square of a speed—translational or rotational as appropriate. The kinetic energies of translation and of rotation are not different kinds of energy. They are both kinetic energy, expressed in ways that are appropriate to the motion at hand.

We noted previously that the rotational inertia of a rotating body involves not only its mass but also how that mass is distributed. Here is an example that you can literally feel. Rotate a long, fairly heavy rod (a pole, a length of lumber, or something similar), first around its central (longitudinal) axis (Fig. 10-11*a*) and then around an axis perpendicular to the rod and through the center (Fig. 10-11*b*). Both rotations involve the very same mass, but the first rotation is much easier than the second. The reason is that the mass is distributed much closer to the rotation axis in the first rotation. As a result, the rotational inertia of the rod is much smaller in Fig. 10-11*a* than in Fig. 10-11*b*. In general, smaller rotational inertia means easier rotation.

IPR2024-01137
CamelBak EX 2023
Page 42 of 96

Checkpoint 4

The figure shows three small spheres that rotate about a vertical axis. The perpendicular distance between the axis and the center of each sphere is given. Rank the three spheres according to their rotational inertia about that axis, greatest first.



10-5 CALCULATING THE ROTATIONAL INERTIA

Learning Objectives

After reading this module, you should be able to . . .

10.20 Determine the rotational inertia of a body if it is given in Table 10-2.

10.21 Calculate the rotational inertia of a body by integration over the mass elements of the body.

10.22 Apply the parallel-axis theorem for a rotation axis that is displaced from a parallel axis through the center of mass of a body.

Key Ideas

● I is the rotational inertia of the body, defined as

$$I = \sum m_i r_i^2$$

for a system of discrete particles and defined as

$$I = \int r^2\, dm$$

for a body with continuously distributed mass. The r and r_i in these expressions represent the perpendicular distance from the axis of rotation to each mass element in the body, and the integration is carried out over the entire body so as to include every mass element.

● The parallel-axis theorem relates the rotational inertia I of a body about any axis to that of the same body about a parallel axis through the center of mass:

$$I = I_{com} + Mh^2.$$

Here h is the perpendicular distance between the two axes, and I_{com} is the rotational inertia of the body about the axis through the com. We can describe h as being the distance the actual rotation axis has been shifted from the rotation axis through the com.

Calculating the Rotational Inertia

If a rigid body consists of a few particles, we can calculate its rotational inertia about a given rotation axis with Eq. 10-33 ($I = \Sigma\, m_i r_i^2$); that is, we can find the product mr^2 for each particle and then sum the products. (Recall that r is the perpendicular distance a particle is from the given rotation axis.)

If a rigid body consists of a great many adjacent particles (it is *continuous,* like a Frisbee), using Eq. 10-33 would require a computer. Thus, instead, we replace the sum in Eq. 10-33 with an integral and define the rotational inertia of the body as

$$I = \int r^2\, dm \quad \text{(rotational inertia, continuous body).} \tag{10-35}$$

Table 10-2 gives the results of such integration for nine common body shapes and the indicated axes of rotation.

Parallel-Axis Theorem

Suppose we want to find the rotational inertia I of a body of mass M about a given axis. In principle, we can always find I with the integration of Eq. 10-35. However, there is a neat shortcut if we happen to already know the rotational inertia I_{com} of the body about a *parallel* axis that extends through the body's center of mass. Let h be the perpendicular distance between the given axis and the axis

IPR2024-01137
CamelBak EX 2023
Page 43 of 96

Table 10-2 Some Rotational Inertias

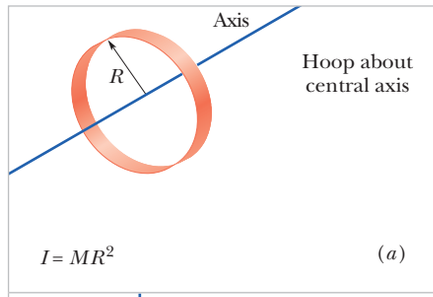 Hoop about central axis $I = MR^2$ (a)	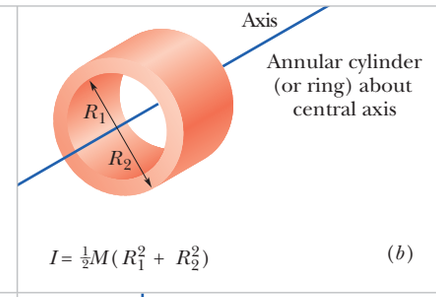 Annular cylinder (or ring) about central axis $I = \frac{1}{2}M(R_1^2 + R_2^2)$ (b)	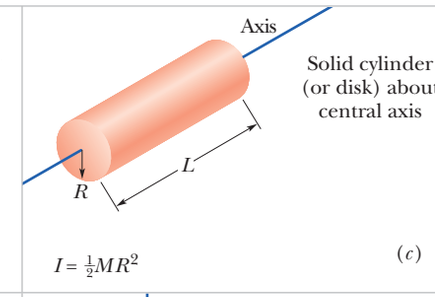 Solid cylinder (or disk) about central axis $I = \frac{1}{2}MR^2$ (c)
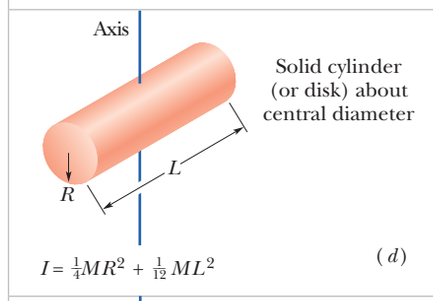 Solid cylinder (or disk) about central diameter $I = \frac{1}{4}MR^2 + \frac{1}{12}ML^2$ (d)	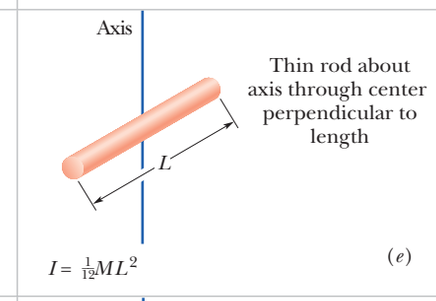 Thin rod about axis through center perpendicular to length $I = \frac{1}{12}ML^2$ (e)	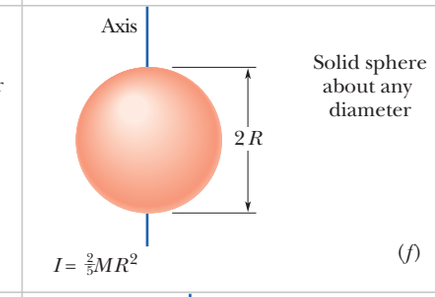 Solid sphere about any diameter $I = \frac{2}{5}MR^2$ (f)
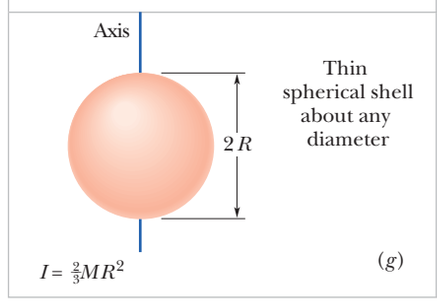 Thin spherical shell about any diameter $I = \frac{2}{3}MR^2$ (g)	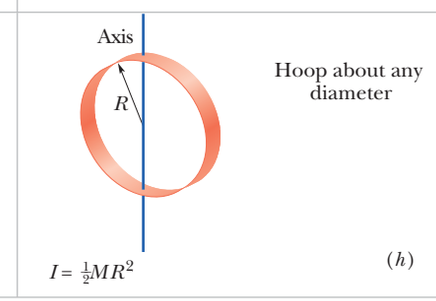 Hoop about any diameter $I = \frac{1}{2}MR^2$ (h)	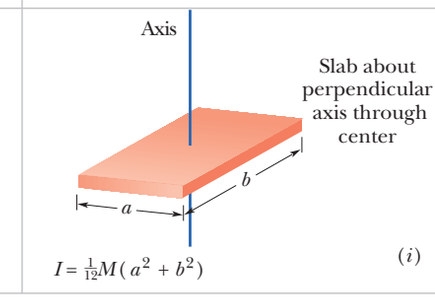 Slab about perpendicular axis through center $I = \frac{1}{12}M(a^2 + b^2)$ (i)

We need to relate the rotational inertia around the axis at P to that around the axis at the com.

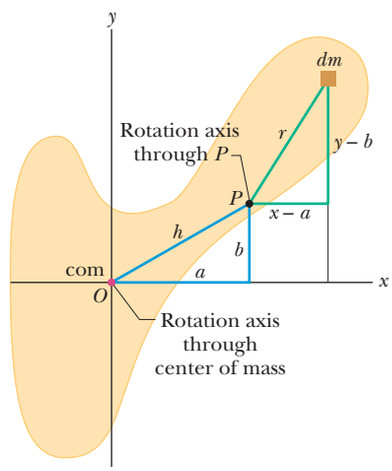

Figure 10-12 A rigid body in cross section, with its center of mass at O. The parallel-axis theorem (Eq. 10-36) relates the rotational inertia of the body about an axis through O to that about a parallel axis through a point such as P, a distance h from the body's center of mass.

through the center of mass (remember these two axes must be parallel). Then the rotational inertia I about the given axis is

$$I = I_{com} + Mh^2 \quad \text{(parallel-axis theorem)}. \tag{10-36}$$

Think of the distance h as being the distance we have shifted the rotation axis from being through the com. This equation is known as the **parallel-axis theorem.** We shall now prove it.

Proof of the Parallel-Axis Theorem

Let O be the center of mass of the arbitrarily shaped body shown in cross section in Fig. 10-12. Place the origin of the coordinates at O. Consider an axis through O perpendicular to the plane of the figure, and another axis through point P parallel to the first axis. Let the x and y coordinates of P be a and b.

Let dm be a mass element with the general coordinates x and y. The rotational inertia of the body about the axis through P is then, from Eq. 10-35,

$$I = \int r^2\, dm = \int [(x - a)^2 + (y - b)^2]\, dm,$$

which we can rearrange as

$$I = \int (x^2 + y^2)\, dm - 2a \int x\, dm - 2b \int y\, dm + \int (a^2 + b^2)\, dm. \tag{10-37}$$

From the definition of the center of mass (Eq. 9-9), the middle two integrals of Eq. 10-37 give the coordinates of the center of mass (multiplied by a constant)

IPR2024-01137
CamelBak EX 2023
Page 44 of 96

and thus must each be zero. Because $x^2 + y^2$ is equal to R^2, where R is the distance from O to dm, the first integral is simply I_{com}, the rotational inertia of the body about an axis through its center of mass. Inspection of Fig. 10-12 shows that the last term in Eq. 10-37 is Mh^2, where M is the body's total mass. Thus, Eq. 10-37 reduces to Eq. 10-36, which is the relation that we set out to prove.

Checkpoint 5

The figure shows a book-like object (one side is longer than the other) and four choices of rotation axes, all perpendicular to the face of the object. Rank the choices according to the rotational inertia of the object about the axis, greatest first.



Sample Problem 10.06 Rotational inertia of a two-particle system

Figure 10-13*a* shows a rigid body consisting of two particles of mass m connected by a rod of length L and negligible mass.

(a) What is the rotational inertia I_{com} about an axis through the center of mass, perpendicular to the rod as shown?

KEY IDEA

Because we have only two particles with mass, we can find the body's rotational inertia I_{com} by using Eq. 10-33 rather than by integration. That is, we find the rotational inertia of each particle and then just add the results.

Calculations: For the two particles, each at perpendicular distance $\frac{1}{2}L$ from the rotation axis, we have

$$I = \sum m_i r_i^2 = (m)(\tfrac{1}{2}L)^2 + (m)(\tfrac{1}{2}L)^2$$
$$= \tfrac{1}{2}mL^2. \qquad \text{(Answer)}$$

(b) What is the rotational inertia I of the body about an axis through the left end of the rod and parallel to the first axis (Fig. 10-13*b*)?

KEY IDEAS

This situation is simple enough that we can find I using either of two techniques. The first is similar to the one used in part (a). The other, more powerful one is to apply the parallel-axis theorem.

First technique: We calculate I as in part (a), except here the perpendicular distance r_i is zero for the particle on the left and L for the particle on the right. Now Eq. 10-33 gives us

$$I = m(0)^2 + mL^2 = mL^2. \qquad \text{(Answer)}$$

Second technique: Because we already know I_{com} about an axis through the center of mass and because the axis here is parallel to that "com axis," we can apply the parallel-axis theorem (Eq. 10-36). We find

$$I = I_{com} + Mh^2 = \tfrac{1}{2}mL^2 + (2m)(\tfrac{1}{2}L)^2$$
$$= mL^2. \qquad \text{(Answer)}$$

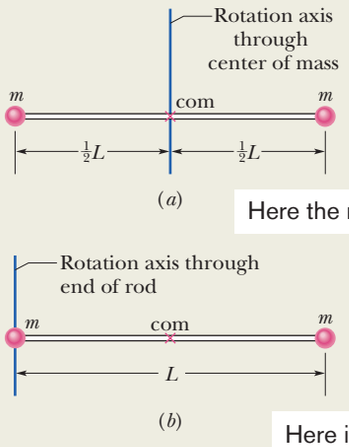

Figure 10-13 A rigid body consisting of two particles of mass m joined by a rod of negligible mass.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

IPR2024-01137
CamelBak EX 2023
Page 45 of 96

Sample Problem 10.07 Rotational inertia of a uniform rod, integration

Figure 10-14 shows a thin, uniform rod of mass M and length L, on an x axis with the origin at the rod's center.

(a) What is the rotational inertia of the rod about the perpendicular rotation axis through the center?

KEY IDEAS

(1) The rod consists of a huge number of particles at a great many different distances from the rotation axis. We certainly don't want to sum their rotational inertias individually. So, we first write a general expression for the rotational inertia of a mass element dm at distance r from the rotation axis: $r^2\,dm$. (2) Then we sum all such rotational inertias by integrating the expression (rather than adding them up one by one). From Eq. 10-35, we write

$$I = \int r^2\,dm. \tag{10-38}$$

(3) Because the rod is uniform and the rotation axis is at the center, we are actually calculating the rotational inertia I_{com} about the center of mass.

Calculations: We want to integrate with respect to coordinate x (not mass m as indicated in the integral), so we must relate the mass dm of an element of the rod to its length dx along the rod. (Such an element is shown in Fig. 10-14.) Because the rod is uniform, the ratio of mass to length is the same for all the elements and for the rod as a whole. Thus, we can write

$$\frac{\text{element's mass } dm}{\text{element's length } dx} = \frac{\text{rod's mass } M}{\text{rod's length } L}$$

or

$$dm = \frac{M}{L}\,dx.$$

We can now substitute this result for dm and x for r in Eq. 10-38. Then we integrate from end to end of the rod (from $x = -L/2$ to $x = L/2$) to include all the elements. We find

$$I = \int_{x=-L/2}^{x=+L/2} x^2\left(\frac{M}{L}\right)dx$$

$$= \frac{M}{3L}\left[x^3\right]_{-L/2}^{+L/2} = \frac{M}{3L}\left[\left(\frac{L}{2}\right)^3 - \left(-\frac{L}{2}\right)^3\right]$$

$$= \tfrac{1}{12}ML^2. \qquad \text{(Answer)}$$

(b) What is the rod's rotational inertia I about a new rotation axis that is perpendicular to the rod and through the left end?

KEY IDEAS

We can find I by shifting the origin of the x axis to the left end of the rod and then integrating from $x = 0$ to $x = L$. However, here we shall use a more powerful (and easier) technique by applying the parallel-axis theorem (Eq. 10-36), in which we shift the rotation axis without changing its orientation.

Calculations: If we place the axis at the rod's end so that it is parallel to the axis through the center of mass, then we can use the parallel-axis theorem (Eq. 10-36). We know from part (a) that I_{com} is $\frac{1}{12}ML^2$. From Fig. 10-14, the perpendicular distance h between the new rotation axis and the center of mass is $\frac{1}{2}L$. Equation 10-36 then gives us

$$I = I_{com} + Mh^2 = \tfrac{1}{12}ML^2 + (M)(\tfrac{1}{2}L)^2$$

$$= \tfrac{1}{3}ML^2. \qquad \text{(Answer)}$$

Actually, this result holds for any axis through the left or right end that is perpendicular to the rod.

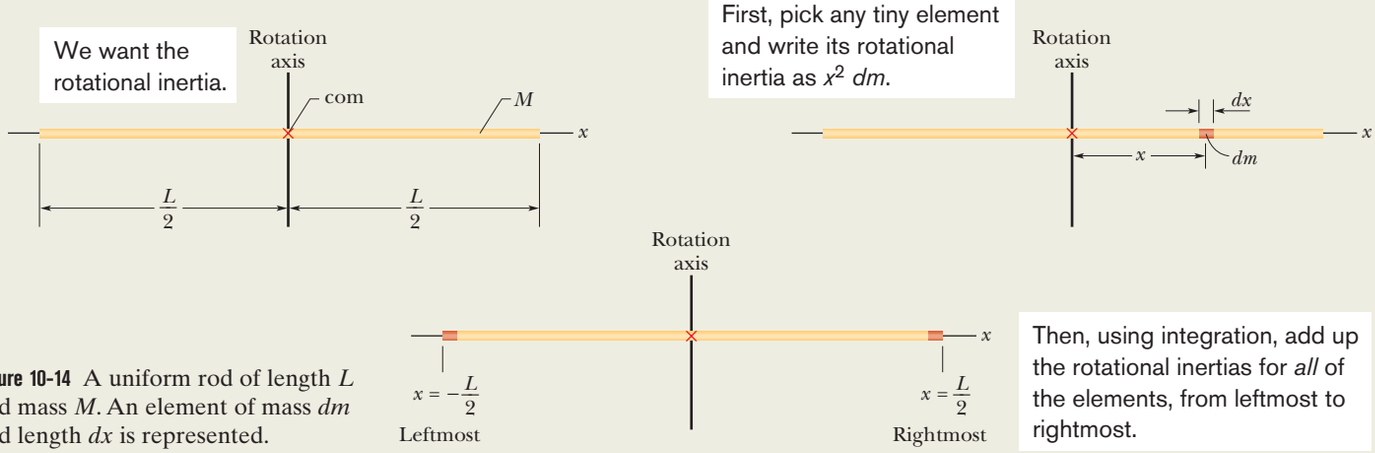

Figure 10-14 A uniform rod of length L and mass M. An element of mass dm and length dx is represented.

IPR2024-01137
CamelBak EX 2023
Page 46 of 96

Sample Problem 10.08 Rotational kinetic energy, spin test explosion

Large machine components that undergo prolonged, high-speed rotation are first examined for the possibility of failure in a *spin test system.* In this system, a component is *spun up* (brought up to high speed) while inside a cylindrical arrangement of lead bricks and containment liner, all within a steel shell that is closed by a lid clamped into place. If the rotation causes the component to shatter, the soft lead bricks are supposed to catch the pieces for later analysis.

In 1985, Test Devices, Inc. (www.testdevices.com) was spin testing a sample of a solid steel rotor (a disk) of mass $M = 272$ kg and radius $R = 38.0$ cm. When the sample reached an angular speed ω of 14 000 rev/min, the test engineers heard a dull thump from the test system, which was located one floor down and one room over from them. Investigating, they found that lead bricks had been thrown out in the hallway leading to the test room, a door to the room had been hurled into the adjacent parking lot, one lead brick had shot from the test site through the wall of a neighbor's kitchen, the structural beams of the test building had been damaged, the concrete floor beneath the spin chamber had been shoved downward by about 0.5 cm, and the 900 kg lid had been blown upward through the ceiling and had then crashed back onto the test equipment (Fig. 10-15). The exploding pieces had not penetrated the room of the test engineers only by luck.

How much energy was released in the explosion of the rotor?

Courtesy Test Devices, Inc.

Figure 10-15 Some of the destruction caused by the explosion of a rapidly rotating steel disk.

KEY IDEA

The released energy was equal to the rotational kinetic energy K of the rotor just as it reached the angular speed of 14 000 rev/min.

Calculations: We can find K with Eq. 10-34 ($K = \frac{1}{2}I\omega^2$), but first we need an expression for the rotational inertia I. Because the rotor was a disk that rotated like a merry-go-round, I is given in Table 10-2*c* ($I = \frac{1}{2}MR^2$). Thus,

$$I = \tfrac{1}{2}MR^2 = \tfrac{1}{2}(272\text{ kg})(0.38\text{ m})^2 = 19.64\text{ kg}\cdot\text{m}^2.$$

The angular speed of the rotor was

$$\omega = (14\,000\text{ rev/min})(2\pi\text{ rad/rev})\left(\frac{1\text{ min}}{60\text{ s}}\right) = 1.466 \times 10^3\text{ rad/s}.$$

Then, with Eq. 10-34, we find the (huge) energy release:

$$K = \tfrac{1}{2}I\omega^2 = \tfrac{1}{2}(19.64\text{ kg}\cdot\text{m}^2)(1.466 \times 10^3\text{ rad/s})^2 = 2.1 \times 10^7\text{ J}. \quad \text{(Answer)}$$

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

10-6 TORQUE

Learning Objectives

After reading this module, you should be able to . . .

10.23 Identify that a torque on a body involves a force and a position vector, which extends from a rotation axis to the point where the force is applied.

10.24 Calculate the torque by using (a) the angle between the position vector and the force vector, (b) the line of action and the moment arm of the force, and (c) the force component perpendicular to the position vector.

10.25 Identify that a rotation axis must always be specified to calculate a torque.

10.26 Identify that a torque is assigned a positive or negative sign depending on the direction it tends to make the body rotate about a specified rotation axis: "clocks are negative."

10.27 When more than one torque acts on a body about a rotation axis, calculate the net torque.

Key Ideas

● Torque is a turning or twisting action on a body about a rotation axis due to a force $\vec{F}$. If $\vec{F}$ is exerted at a point given by the position vector $\vec{r}$ relative to the axis, then the magnitude of the torque is

$$\tau = rF_t = r_\perp F = rF\sin\phi,$$

where F_t is the component of $\vec{F}$ perpendicular to $\vec{r}$ and ϕ is the angle between $\vec{r}$ and $\vec{F}$. The quantity $r_\perp$ is the perpendicular distance between the rotation axis and an extended line running through the $\vec{F}$ vector. This line is called the line of action of $\vec{F}$, and $r_\perp$ is called the moment arm of $\vec{F}$. Similarly, r is the moment arm of F_t.

● The SI unit of torque is the newton-meter (N·m). A torque τ is positive if it tends to rotate a body at rest counterclockwise and negative if it tends to rotate the body clockwise.

IPR2024-01137
CamelBak EX 2023
Page 47 of 96

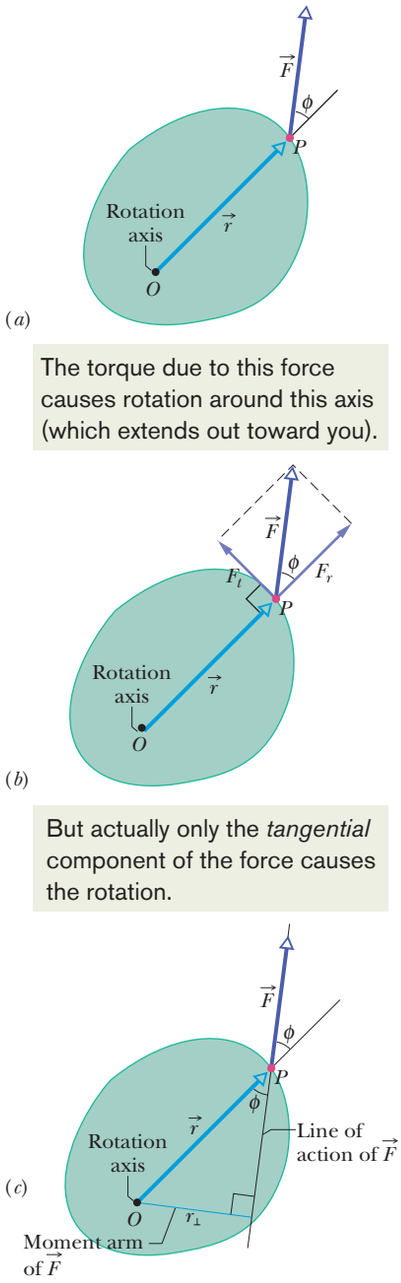

Figure 10-16 (*a*) A force $\vec{F}$ acts on a rigid body, with a rotation axis perpendicular to the page. The torque can be found with (*a*) angle ϕ, (*b*) tangential force component F_t, or (*c*) moment arm $r_\perp$.

Torque

A doorknob is located as far as possible from the door's hinge line for a good reason. If you want to open a heavy door, you must certainly apply a force, but that is not enough. Where you apply that force and in what direction you push are also important. If you apply your force nearer to the hinge line than the knob, or at any angle other than 90° to the plane of the door, you must use a greater force than if you apply the force at the knob and perpendicular to the door's plane.

Figure 10-16*a* shows a cross section of a body that is free to rotate about an axis passing through O and perpendicular to the cross section. A force $\vec{F}$ is applied at point P, whose position relative to O is defined by a position vector $\vec{r}$. The directions of vectors $\vec{F}$ and $\vec{r}$ make an angle ϕ with each other. (For simplicity, we consider only forces that have no component parallel to the rotation axis; thus, $\vec{F}$ is in the plane of the page.)

To determine how $\vec{F}$ results in a rotation of the body around the rotation axis, we resolve $\vec{F}$ into two components (Fig. 10-16*b*). One component, called the *radial component* F_r, points along $\vec{r}$. This component does not cause rotation, because it acts along a line that extends through O. (If you pull on a door parallel to the plane of the door, you do not rotate the door.) The other component of $\vec{F}$, called the *tangential component* F_t, is perpendicular to $\vec{r}$ and has magnitude $F_t = F \sin \phi$. This component *does* cause rotation.

Calculating Torques. The ability of $\vec{F}$ to rotate the body depends not only on the magnitude of its tangential component F_t, but also on just how far from O the force is applied. To include both these factors, we define a quantity called **torque** τ as the product of the two factors and write it as

$$\tau = (r)(F \sin \phi). \tag{10-39}$$

Two equivalent ways of computing the torque are

$$\tau = (r)(F \sin \phi) = rF_t \tag{10-40}$$

and

$$\tau = (r \sin \phi)(F) = r_\perp F, \tag{10-41}$$

where $r_\perp$ is the perpendicular distance between the rotation axis at O and an extended line running through the vector $\vec{F}$ (Fig. 10-16*c*). This extended line is called the **line of action** of $\vec{F}$, and $r_\perp$ is called the **moment arm** of $\vec{F}$. Figure 10-16*b* shows that we can describe r, the magnitude of $\vec{r}$, as being the moment arm of the force component F_t.

Torque, which comes from the Latin word meaning "to twist," may be loosely identified as the turning or twisting action of the force $\vec{F}$. When you apply a force to an object—such as a screwdriver or torque wrench—with the purpose of turning that object, you are applying a torque. The SI unit of torque is the newton-meter (N·m). *Caution:* The newton-meter is also the unit of work. Torque and work, however, are quite different quantities and must not be confused. Work is often expressed in joules (1 J = 1 N·m), but torque never is.

Clocks Are Negative. In Chapter 11 we shall use vector notation for torques, but here, with rotation around a single axis, we use only an algebraic sign. If a torque would cause counterclockwise rotation, it is positive. If it would cause clockwise rotation, it is negative. (The phrase "clocks are negative" from Module 10-1 still works.)

Torques obey the superposition principle that we discussed in Chapter 5 for forces: When several torques act on a body, the **net torque** (or **resultant torque**) is the sum of the individual torques. The symbol for net torque is τ_{net}.

Checkpoint 6

The figure shows an overhead view of a meter stick that can pivot about the dot at the position marked 20 (for 20 cm). All five forces on the stick are horizontal and have the same magnitude. Rank the forces according to the magnitude of the torque they produce, greatest first.



IPR2024-01137
CamelBak EX 2023
Page 48 of 96

10-7 NEWTON'S SECOND LAW FOR ROTATION

Learning Objective

After reading this module, you should be able to . . .

10.28 Apply Newton's second law for rotation to relate the net torque on a body to the body's rotational inertia and rotational acceleration, all calculated relative to a specified rotation axis.

Key Idea

- The rotational analog of Newton's second law is

$$\tau_{net} = I\alpha,$$

where τ_{net} is the net torque acting on a particle or rigid body, I is the rotational inertia of the particle or body about the rotation axis, and α is the resulting angular acceleration about that axis.

Newton's Second Law for Rotation

A torque can cause rotation of a rigid body, as when you use a torque to rotate a door. Here we want to relate the net torque τ_{net} on a rigid body to the angular acceleration α that torque causes about a rotation axis. We do so by analogy with Newton's second law ($F_{net} = ma$) for the acceleration a of a body of mass m due to a net force F_{net} along a coordinate axis. We replace F_{net} with τ_{net}, m with I, and a with α in radian measure, writing

$$\tau_{net} = I\alpha \quad \text{(Newton's second law for rotation).} \tag{10-42}$$

Proof of Equation 10-42

We prove Eq. 10-42 by first considering the simple situation shown in Fig. 10-17. The rigid body there consists of a particle of mass m on one end of a massless rod of length r. The rod can move only by rotating about its other end, around a rotation axis (an axle) that is perpendicular to the plane of the page. Thus, the particle can move only in a circular path that has the rotation axis at its center.

A force $\vec{F}$ acts on the particle. However, because the particle can move only along the circular path, only the tangential component F_t of the force (the component that is tangent to the circular path) can accelerate the particle along the path. We can relate F_t to the particle's tangential acceleration a_t along the path with Newton's second law, writing

$$F_t = ma_t.$$

The torque acting on the particle is, from Eq. 10-40,

$$\tau = F_t r = ma_t r.$$

From Eq. 10-22 ($a_t = \alpha r$) we can write this as

$$\tau = m(\alpha r)r = (mr^2)\alpha. \tag{10-43}$$

The quantity in parentheses on the right is the rotational inertia of the particle about the rotation axis (see Eq. 10-33, but here we have only a single particle). Thus, using I for the rotational inertia, Eq. 10-43 reduces to

$$\tau = I\alpha \quad \text{(radian measure).} \tag{10-44}$$

If more than one force is applied to the particle, Eq. 10-44 becomes

$$\tau_{net} = I\alpha \quad \text{(radian measure),} \tag{10-45}$$

which we set out to prove. We can extend this equation to any rigid body rotating about a fixed axis, because any such body can always be analyzed as an assembly of single particles.

The torque due to the tangential component of the force causes an angular acceleration around the rotation axis.

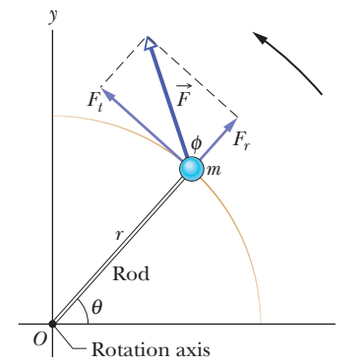

Figure 10-17 A simple rigid body, free to rotate about an axis through O, consists of a particle of mass m fastened to the end of a rod of length r and negligible mass. An applied force $\vec{F}$ causes the body to rotate.

IPR2024-01137
CamelBak EX 2023
Page 49 of 96

Checkpoint 7

The figure shows an overhead view of a meter stick that can pivot about the point indicated, which is to the left of the stick's midpoint. Two horizontal forces, $\vec{F}_1$ and $\vec{F}_2$, are applied to the stick. Only $\vec{F}_1$ is shown. Force $\vec{F}_2$ is perpendicular to the stick and is applied at the right end. If the stick is not to turn, (a) what should be the direction of $\vec{F}_2$, and (b) should F_2 be greater than, less than, or equal to F_1?



Sample Problem 10.09 Using Newton's second law for rotation in a basic judo hip throw

To throw an 80 kg opponent with a basic judo hip throw, you intend to pull his uniform with a force $\vec{F}$ and a moment arm $d_1 = 0.30$ m from a pivot point (rotation axis) on your right hip (Fig. 10-18). You wish to rotate him about the pivot point with an angular acceleration α of -6.0 rad/s^2—that is, with an angular acceleration that is *clockwise* in the figure. Assume that his rotational inertia I relative to the pivot point is 15 kg·m^2.

(a) What must the magnitude of $\vec{F}$ be if, before you throw him, you bend your opponent forward to bring his center of mass to your hip (Fig. 10-18*a*)?

KEY IDEA

We can relate your pull $\vec{F}$ on your opponent to the given angular acceleration α via Newton's second law for rotation ($\tau_{net} = I\alpha$).

Calculations: As his feet leave the floor, we can assume that only three forces act on him: your pull $\vec{F}$, a force $\vec{N}$ on him from you at the pivot point (this force is not indicated in Fig. 10-18), and the gravitational force $\vec{F}_g$. To use $\tau_{net} = I\alpha$, we need the corresponding three torques, each about the pivot point.

From Eq. 10-41 ($\tau = r_\perp F$), the torque due to your pull $\vec{F}$ is equal to $-d_1F$, where d_1 is the moment arm $r_\perp$ and the sign indicates the clockwise rotation this torque tends to cause. The torque due to $\vec{N}$ is zero, because $\vec{N}$ acts at the pivot point and thus has moment arm $r_\perp = 0$.

To evaluate the torque due to $\vec{F}_g$, we can assume that $\vec{F}_g$ acts at your opponent's center of mass. With the center of mass at the pivot point, $\vec{F}_g$ has moment arm $r_\perp = 0$ and thus the torque due to $\vec{F}_g$ is zero. So, the only torque on your opponent is due to your pull $\vec{F}$, and we can write $\tau_{net} = I\alpha$ as

$$-d_1F = I\alpha.$$

We then find

$$F = \frac{-I\alpha}{d_1} = \frac{-(15\ \text{kg}\cdot\text{m}^2)(-6.0\ \text{rad/s}^2)}{0.30\ \text{m}}$$

$$= 300\ \text{N}. \qquad \text{(Answer)}$$

(b) What must the magnitude of $\vec{F}$ be if your opponent remains upright before you throw him, so that $\vec{F}_g$ has a moment arm $d_2 = 0.12$ m (Fig. 10-18*b*)?

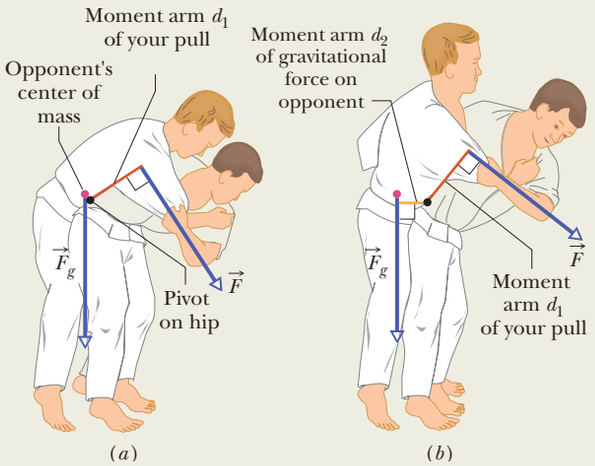

Figure 10-18 A judo hip throw (*a*) correctly executed and (*b*) incorrectly executed.

KEY IDEA

Because the moment arm for $\vec{F}_g$ is no longer zero, the torque due to $\vec{F}_g$ is now equal to d_2mg and is positive because the torque attempts counterclockwise rotation.

Calculations: Now we write $\tau_{net} = I\alpha$ as

$$-d_1F + d_2mg = I\alpha,$$

which gives

$$F = -\frac{I\alpha}{d_1} + \frac{d_2mg}{d_1}.$$

From (a), we know that the first term on the right is equal to 300 N. Substituting this and the given data, we have

$$F = 300\ \text{N} + \frac{(0.12\ \text{m})(80\ \text{kg})(9.8\ \text{m/s}^2)}{0.30\ \text{m}}$$

$$= 613.6\ \text{N} \approx 610\ \text{N}. \qquad \text{(Answer)}$$

The results indicate that you will have to pull much harder if you do not initially bend your opponent to bring his center of mass to your hip. A good judo fighter knows this lesson from physics. Indeed, physics is the basis of most of the martial arts, figured out after countless hours of trial and error over the centuries.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

IPR2024-01137
CamelBak EX 2023
Page 50 of 96

Sample Problem 10.10 Newton's second law, rotation, torque, disk

Figure 10-19*a* shows a uniform disk, with mass $M = 2.5$ kg and radius $R = 20$ cm, mounted on a fixed horizontal axle. A block with mass $m = 1.2$ kg hangs from a massless cord that is wrapped around the rim of the disk. Find the acceleration of the falling block, the angular acceleration of the disk, and the tension in the cord. The cord does not slip, and there is no friction at the axle.

KEY IDEAS

(1) Taking the block as a system, we can relate its acceleration a to the forces acting on it with Newton's second law ($\vec{F}_{net} = m\vec{a}$). (2) Taking the disk as a system, we can relate its angular acceleration α to the torque acting on it with Newton's second law for rotation ($\tau_{net} = I\alpha$). (3) To combine the motions of block and disk, we use the fact that the linear acceleration a of the block and the (tangential) linear acceleration a_t of the disk rim are equal. (To avoid confusion about signs, let's work with acceleration magnitudes and explicit algebraic signs.)

Forces on block: The forces are shown in the block's free-body diagram in Fig. 10-19*b*: The force from the cord is $\vec{T}$, and the gravitational force is $\vec{F}_g$, of magnitude mg. We can now write Newton's second law for components along a vertical y axis ($F_{net,y} = ma_y$) as

$$T - mg = m(-a), \tag{10-46}$$

where a is the magnitude of the acceleration (down the y axis). However, we cannot solve this equation for a because it also contains the unknown T.

Torque on disk: Previously, when we got stuck on the y axis, we switched to the x axis. Here, we switch to the rotation of the disk and use Newton's second law in angular form. To calculate the torques and the rotational inertia I, we take the rotation axis to be perpendicular to the disk and through its center, at point O in Fig. 10-19*c*.

The torques are then given by Eq. 10-40 ($\tau = rF_t$). The gravitational force on the disk and the force on the disk from the axle both act at the center of the disk and thus at distance $r = 0$, so their torques are zero. The force $\vec{T}$ on the disk due to the cord acts at distance $r = R$ and is tangent to the rim of the disk. Therefore, its torque is $-RT$, negative because the torque rotates the disk clockwise from rest. Let α be the magnitude of the negative (clockwise) angular acceleration. From Table 10-2*c*, the rotational inertia I of the disk is $\frac{1}{2}MR^2$. Thus we can write the general equation $\tau_{net} = I\alpha$ as

$$-RT = \tfrac{1}{2}MR^2(-\alpha). \tag{10-47}$$

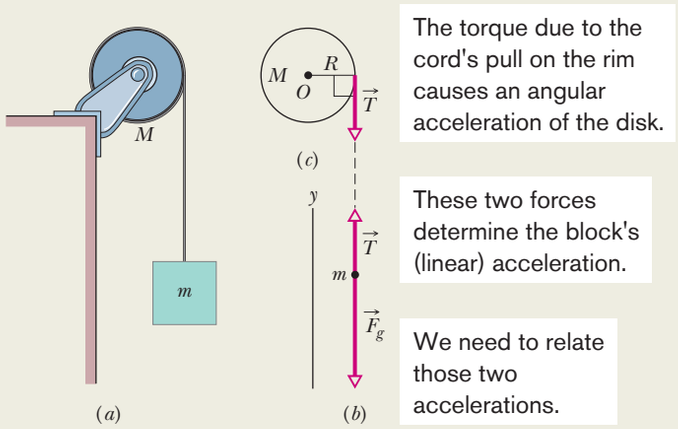

Figure 10-19 (*a*) The falling block causes the disk to rotate. (*b*) A free-body diagram for the block. (*c*) An incomplete free-body diagram for the disk.

This equation seems useless because it has two unknowns, α and T, neither of which is the desired a. However, mustering physics courage, we can make it useful with this fact: Because the cord does not slip, the magnitude a of the block's linear acceleration and the magnitude a_t of the (tangential) linear acceleration of the rim of the disk are equal. Then, by Eq. 10-22 ($a_t = \alpha r$) we see that here $\alpha = a/R$. Substituting this in Eq. 10-47 yields

$$T = \tfrac{1}{2}Ma. \tag{10-48}$$

Combining results: Combining Eqs. 10-46 and 10-48 leads to

$$a = g\frac{2m}{M + 2m} = (9.8\ \text{m/s}^2)\frac{(2)(1.2\ \text{kg})}{2.5\ \text{kg} + (2)(1.2\ \text{kg})}$$
$$= 4.8\ \text{m/s}^2. \tag{Answer}$$

We then use Eq. 10-48 to find T:

$$T = \tfrac{1}{2}Ma = \tfrac{1}{2}(2.5\ \text{kg})(4.8\ \text{m/s}^2)$$
$$= 6.0\ \text{N}. \tag{Answer}$$

As we should expect, acceleration a of the falling block is less than g, and tension T in the cord ($= 6.0$ N) is less than the gravitational force on the hanging block ($= mg = 11.8$ N). We see also that a and T depend on the mass of the disk but not on its radius.

As a check, we note that the formulas derived above predict $a = g$ and $T = 0$ for the case of a massless disk ($M = 0$). This is what we would expect; the block simply falls as a free body. From Eq. 10-22, the magnitude of the angular acceleration of the disk is

$$\alpha = \frac{a}{R} = \frac{4.8\ \text{m/s}^2}{0.20\ \text{m}} = 24\ \text{rad/s}^2. \tag{Answer}$$

IPR2024-01137
CamelBak EX 2023
Page 51 of 96

10-8 WORK AND ROTATIONAL KINETIC ENERGY

Learning Objectives

After reading this module, you should be able to . . .

10.29 Calculate the work done by a torque acting on a rotating body by integrating the torque with respect to the angle of rotation.

10.30 Apply the work–kinetic energy theorem to relate the work done by a torque to the resulting change in the rotational kinetic energy of the body.

10.31 Calculate the work done by a *constant* torque by relating the work to the angle through which the body rotates.

10.32 Calculate the power of a torque by finding the rate at which work is done.

10.33 Calculate the power of a torque at any given instant by relating it to the torque and the angular velocity at that instant.

Key Ideas

- The equations used for calculating work and power in rotational motion correspond to equations used for translational motion and are

$$W = \int_{\theta_i}^{\theta_f} \tau \, d\theta$$

and

$$P = \frac{dW}{dt} = \tau\omega.$$

- When τ is constant, the integral reduces to

$$W = \tau(\theta_f - \theta_i).$$

- The form of the work–kinetic energy theorem used for rotating bodies is

$$\Delta K = K_f - K_i = \tfrac{1}{2}I\omega_f^2 - \tfrac{1}{2}I\omega_i^2 = W.$$

Work and Rotational Kinetic Energy

As we discussed in Chapter 7, when a force F causes a rigid body of mass m to accelerate along a coordinate axis, the force does work W on the body. Thus, the body's kinetic energy ($K = \frac{1}{2}mv^2$) can change. Suppose it is the only energy of the body that changes. Then we relate the change ΔK in kinetic energy to the work W with the work–kinetic energy theorem (Eq. 7-10), writing

$$\Delta K = K_f - K_i = \tfrac{1}{2}mv_f^2 - \tfrac{1}{2}mv_i^2 = W \quad \text{(work–kinetic energy theorem)}. \tag{10-49}$$

For motion confined to an x axis, we can calculate the work with Eq. 7-32,

$$W = \int_{x_i}^{x_f} F \, dx \quad \text{(work, one-dimensional motion)}. \tag{10-50}$$

This reduces to $W = Fd$ when F is constant and the body's displacement is d. The rate at which the work is done is the power, which we can find with Eqs. 7-43 and 7-48,

$$P = \frac{dW}{dt} = Fv \quad \text{(power, one-dimensional motion)}. \tag{10-51}$$

Now let us consider a rotational situation that is similar. When a torque accelerates a rigid body in rotation about a fixed axis, the torque does work W on the body. Therefore, the body's rotational kinetic energy ($K = \frac{1}{2}I\omega^2$) can change. Suppose that it is the only energy of the body that changes. Then we can still relate the change ΔK in kinetic energy to the work W with the work–kinetic energy theorem, except now the kinetic energy is a rotational kinetic energy:

$$\Delta K = K_f - K_i = \tfrac{1}{2}I\omega_f^2 - \tfrac{1}{2}I\omega_i^2 = W \quad \text{(work–kinetic energy theorem)}. \tag{10-52}$$

Here, I is the rotational inertia of the body about the fixed axis and ω_i and ω_f are the angular speeds of the body before and after the work is done.

IPR2024-01137
CamelBak EX 2023
Page 52 of 96

Also, we can calculate the work with a rotational equivalent of Eq. 10-50,

$$W = \int_{\theta_i}^{\theta_f} \tau \, d\theta \quad \text{(work, rotation about fixed axis)}, \tag{10-53}$$

where τ is the torque doing the work W, and θ_i and θ_f are the body's angular positions before and after the work is done, respectively. When τ is constant, Eq. 10-53 reduces to

$$W = \tau(\theta_f - \theta_i) \quad \text{(work, constant torque)}. \tag{10-54}$$

The rate at which the work is done is the power, which we can find with the rotational equivalent of Eq. 10-51,

$$P = \frac{dW}{dt} = \tau\omega \quad \text{(power, rotation about fixed axis)}. \tag{10-55}$$

Table 10-3 summarizes the equations that apply to the rotation of a rigid body about a fixed axis and the corresponding equations for translational motion.

Proof of Eqs. 10-52 through 10-55

Let us again consider the situation of Fig. 10-17, in which force $\vec{F}$ rotates a rigid body consisting of a single particle of mass m fastened to the end of a massless rod. During the rotation, force $\vec{F}$ does work on the body. Let us assume that the only energy of the body that is changed by $\vec{F}$ is the kinetic energy. Then we can apply the work–kinetic energy theorem of Eq. 10-49:

$$\Delta K = K_f - K_i = W. \tag{10-56}$$

Using $K = \frac{1}{2}mv^2$ and Eq. 10-18 ($v = \omega r$), we can rewrite Eq. 10-56 as

$$\Delta K = \tfrac{1}{2}mr^2\omega_f^2 - \tfrac{1}{2}mr^2\omega_i^2 = W. \tag{10-57}$$

From Eq. 10-33, the rotational inertia for this one-particle body is $I = mr^2$. Substituting this into Eq. 10-57 yields

$$\Delta K = \tfrac{1}{2}I\omega_f^2 - \tfrac{1}{2}I\omega_i^2 = W,$$

which is Eq. 10-52. We derived it for a rigid body with one particle, but it holds for any rigid body rotated about a fixed axis.

We next relate the work W done on the body in Fig. 10-17 to the torque τ on the body due to force $\vec{F}$. When the particle moves a distance ds along its

Table 10-3 Some Corresponding Relations for Translational and Rotational Motion

Pure Translation (Fixed Direction)		Pure Rotation (Fixed Axis)	
Position	x	Angular position	θ
Velocity	$v = dx/dt$	Angular velocity	$\omega = d\theta/dt$
Acceleration	$a = dv/dt$	Angular acceleration	$\alpha = d\omega/dt$
Mass	m	Rotational inertia	I
Newton's second law	$F_{\text{net}} = ma$	Newton's second law	$\tau_{\text{net}} = I\alpha$
Work	$W = \int F\,dx$	Work	$W = \int \tau\,d\theta$
Kinetic energy	$K = \frac{1}{2}mv^2$	Kinetic energy	$K = \frac{1}{2}I\omega^2$
Power (constant force)	$P = Fv$	Power (constant torque)	$P = \tau\omega$
Work–kinetic energy theorem	$W = \Delta K$	Work–kinetic energy theorem	$W = \Delta K$

IPR2024-01137
CamelBak EX 2023
Page 53 of 96

circular path, only the tangential component F_t of the force accelerates the particle along the path. Therefore, only F_t does work on the particle. We write that work dW as $F_t\,ds$. However, we can replace ds with $r\,d\theta$, where $d\theta$ is the angle through which the particle moves. Thus we have

$$dW = F_t r\,d\theta. \tag{10-58}$$

From Eq. 10-40, we see that the product $F_t r$ is equal to the torque τ, so we can rewrite Eq. 10-58 as

$$dW = \tau\,d\theta. \tag{10-59}$$

The work done during a finite angular displacement from θ_i to θ_f is then

$$W = \int_{\theta_i}^{\theta_f} \tau\,d\theta,$$

which is Eq. 10-53. It holds for any rigid body rotating about a fixed axis. Equation 10-54 comes directly from Eq. 10-53.

We can find the power P for rotational motion from Eq. 10-59:

$$P = \frac{dW}{dt} = \tau\frac{d\theta}{dt} = \tau\omega,$$

which is Eq. 10-55.

Sample Problem 10.11 Work, rotational kinetic energy, torque, disk

Let the disk in Fig. 10-19 start from rest at time $t = 0$ and also let the tension in the massless cord be 6.0 N and the angular acceleration of the disk be -24 rad/s^2. What is its rotational kinetic energy K at $t = 2.5$ s?

KEY IDEA

We can find K with Eq. 10-34 ($K = \frac{1}{2}I\omega^2$). We already know that $I = \frac{1}{2}MR^2$, but we do not yet know ω at $t = 2.5$ s. However, because the angular acceleration α has the constant value of -24 rad/s^2, we can apply the equations for constant angular acceleration in Table 10-1.

Calculations: Because we want ω and know α and ω_0 ($= 0$), we use Eq. 10-12:

$$\omega = \omega_0 + \alpha t = 0 + \alpha t = \alpha t.$$

Substituting $\omega = \alpha t$ and $I = \frac{1}{2}MR^2$ into Eq. 10-34, we find

$$\begin{aligned} K &= \tfrac{1}{2}I\omega^2 = \tfrac{1}{2}(\tfrac{1}{2}MR^2)(\alpha t)^2 = \tfrac{1}{4}M(R\alpha t)^2 \\ &= \tfrac{1}{4}(2.5\text{ kg})[(0.20\text{ m})(-24\text{ rad/s}^2)(2.5\text{ s})]^2 \\ &= 90\text{ J}. \end{aligned} \tag{Answer}$$

KEY IDEA

We can also get this answer by finding the disk's kinetic energy from the work done on the disk.

Calculations: First, we relate the *change* in the kinetic energy of the disk to the net work W done on the disk, using the work–kinetic energy theorem of Eq. 10-52 ($K_f - K_i = W$). With K substituted for K_f and 0 for K_i, we get

$$K = K_i + W = 0 + W = W. \tag{10-60}$$

Next we want to find the work W. We can relate W to the torques acting on the disk with Eq. 10-53 or 10-54. The only torque causing angular acceleration and doing work is the torque due to force $\vec{T}$ on the disk from the cord, which is equal to $-TR$. Because α is constant, this torque also must be constant. Thus, we can use Eq. 10-54 to write

$$W = \tau(\theta_f - \theta_i) = -TR(\theta_f - \theta_i). \tag{10-61}$$

Because α is constant, we can use Eq. 10-13 to find $\theta_f - \theta_i$. With $\omega_i = 0$, we have

$$\theta_f - \theta_i = \omega_i t + \tfrac{1}{2}\alpha t^2 = 0 + \tfrac{1}{2}\alpha t^2 = \tfrac{1}{2}\alpha t^2.$$

Now we substitute this into Eq. 10-61 and then substitute the result into Eq. 10-60. Inserting the given values $T = 6.0$ N and $\alpha = -24$ rad/s^2, we have

$$\begin{aligned} K = W &= -TR(\theta_f - \theta_i) = -TR(\tfrac{1}{2}\alpha t^2) = -\tfrac{1}{2}TR\alpha t^2 \\ &= -\tfrac{1}{2}(6.0\text{ N})(0.20\text{ m})(-24\text{ rad/s}^2)(2.5\text{ s})^2 \\ &= 90\text{ J}. \end{aligned} \tag{Answer}$$

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

IPR2024-01137
CamelBak EX 2023
Page 54 of 96

Review & Summary

Angular Position To describe the rotation of a rigid body about a fixed axis, called the **rotation axis,** we assume a **reference line** is fixed in the body, perpendicular to that axis and rotating with the body. We measure the **angular position** θ of this line relative to a fixed direction. When θ is measured in **radians,**

$$\theta = \frac{s}{r} \quad \text{(radian measure)}, \tag{10-1}$$

where s is the arc length of a circular path of radius r and angle θ. Radian measure is related to angle measure in revolutions and degrees by

$$1 \text{ rev} = 360^\circ = 2\pi \text{ rad}. \tag{10-2}$$

Angular Displacement A body that rotates about a rotation axis, changing its angular position from θ_1 to θ_2, undergoes an **angular displacement**

$$\Delta\theta = \theta_2 - \theta_1, \tag{10-4}$$

where $\Delta\theta$ is positive for counterclockwise rotation and negative for clockwise rotation.

Angular Velocity and Speed If a body rotates through an angular displacement $\Delta\theta$ in a time interval Δt, its **average angular velocity** ω_{avg} is

$$\omega_{avg} = \frac{\Delta\theta}{\Delta t}. \tag{10-5}$$

The **(instantaneous) angular velocity** ω of the body is

$$\omega = \frac{d\theta}{dt}. \tag{10-6}$$

Both ω_{avg} and ω are vectors, with directions given by the **right-hand rule** of Fig. 10-6. They are positive for counterclockwise rotation and negative for clockwise rotation. The magnitude of the body's angular velocity is the **angular speed.**

Angular Acceleration If the angular velocity of a body changes from ω_1 to ω_2 in a time interval $\Delta t = t_2 - t_1$, the **average angular acceleration** α_{avg} of the body is

$$\alpha_{avg} = \frac{\omega_2 - \omega_1}{t_2 - t_1} = \frac{\Delta\omega}{\Delta t}. \tag{10-7}$$

The **(instantaneous) angular acceleration** α of the body is

$$\alpha = \frac{d\omega}{dt}. \tag{10-8}$$

Both α_{avg} and α are vectors.

The Kinematic Equations for Constant Angular Acceleration *Constant angular acceleration* (α = constant) is an important special case of rotational motion. The appropriate kinematic equations, given in Table 10-1, are

$$\omega = \omega_0 + \alpha t, \tag{10-12}$$

$$\theta - \theta_0 = \omega_0 t + \tfrac{1}{2}\alpha t^2, \tag{10-13}$$

$$\omega^2 = \omega_0^2 + 2\alpha(\theta - \theta_0), \tag{10-14}$$

$$\theta - \theta_0 = \tfrac{1}{2}(\omega_0 + \omega)t, \tag{10-15}$$

$$\theta - \theta_0 = \omega t - \tfrac{1}{2}\alpha t^2. \tag{10-16}$$

Linear and Angular Variables Related A point in a rigid rotating body, at a *perpendicular distance* r from the rotation axis, moves in a circle with radius r. If the body rotates through an angle θ, the point moves along an arc with length s given by

$$s = \theta r \quad \text{(radian measure)}, \tag{10-17}$$

where θ is in radians.

The linear velocity $\vec{v}$ of the point is tangent to the circle; the point's linear speed v is given by

$$v = \omega r \quad \text{(radian measure)}, \tag{10-18}$$

where ω is the angular speed (in radians per second) of the body.

The linear acceleration $\vec{a}$ of the point has both *tangential* and *radial* components. The tangential component is

$$a_t = \alpha r \quad \text{(radian measure)}, \tag{10-22}$$

where α is the magnitude of the angular acceleration (in radians per second-squared) of the body. The radial component of $\vec{a}$ is

$$a_r = \frac{v^2}{r} = \omega^2 r \quad \text{(radian measure)}. \tag{10-23}$$

If the point moves in uniform circular motion, the period T of the motion for the point and the body is

$$T = \frac{2\pi r}{v} = \frac{2\pi}{\omega} \quad \text{(radian measure)}. \tag{10-19, 10-20}$$

Rotational Kinetic Energy and Rotational Inertia The kinetic energy K of a rigid body rotating about a fixed axis is given by

$$K = \tfrac{1}{2}I\omega^2 \quad \text{(radian measure)}, \tag{10-34}$$

in which I is the **rotational inertia** of the body, defined as

$$I = \sum m_i r_i^2 \tag{10-33}$$

for a system of discrete particles and defined as

$$I = \int r^2\, dm \tag{10-35}$$

for a body with continuously distributed mass. The r and r_i in these expressions represent the perpendicular distance from the axis of rotation to each mass element in the body, and the integration is carried out over the entire body so as to include every mass element.

The Parallel-Axis Theorem The *parallel-axis theorem* relates the rotational inertia I of a body about any axis to that of the same body about a parallel axis through the center of mass:

$$I = I_{com} + Mh^2. \tag{10-36}$$

Here h is the perpendicular distance between the two axes, and I_{com} is the rotational inertia of the body about the axis through the com. We can describe h as being the distance the actual rotation axis has been shifted from the rotation axis through the com.

Torque *Torque* is a turning or twisting action on a body about a rotation axis due to a force $\vec{F}$. If $\vec{F}$ is exerted at a point given by the position vector $\vec{r}$ relative to the axis, then the magnitude of the torque is

$$\tau = rF_t = r_\perp F = rF\sin\phi, \tag{10-40, 10-41, 10-39}$$

where F_t is the component of $\vec{F}$ perpendicular to $\vec{r}$ and ϕ is the angle between $\vec{r}$ and $\vec{F}$. The quantity $r_\perp$ is the perpendicular distance between the rotation axis and an extended line running through the $\vec{F}$ vector. This line is called the **line of action** of $\vec{F}$, and $r_\perp$ is called the **moment arm** of $\vec{F}$. Similarly, r is the moment arm of F_t.

IPR2024-01137
CamelBak EX 2023
Page 55 of 96

The SI unit of torque is the newton-meter (N·m). A torque τ is positive if it tends to rotate a body at rest counterclockwise and negative if it tends to rotate the body clockwise.

Newton's Second Law in Angular Form The rotational analog of Newton's second law is

$$\tau_{net} = I\alpha, \tag{10-45}$$

where τ_{net} is the net torque acting on a particle or rigid body, I is the rotational inertia of the particle or body about the rotation axis, and α is the resulting angular acceleration about that axis.

Work and Rotational Kinetic Energy The equations used for calculating work and power in rotational motion correspond to equations used for translational motion and are

$$W = \int_{\theta_i}^{\theta_f} \tau\, d\theta \tag{10-53}$$

and

$$P = \frac{dW}{dt} = \tau\omega. \tag{10-55}$$

When τ is constant, Eq. 10-53 reduces to

$$W = \tau(\theta_f - \theta_i). \tag{10-54}$$

The form of the work–kinetic energy theorem used for rotating bodies is

$$\Delta K = K_f - K_i = \tfrac{1}{2}I\omega_f^2 - \tfrac{1}{2}I\omega_i^2 = W. \tag{10-52}$$

Questions

1 Figure 10-20 is a graph of the angular velocity versus time for a disk rotating like a merry-go-round. For a point on the disk rim, rank the instants a, b, c, and d according to the magnitude of the (a) tangential and (b) radial acceleration, greatest first.



Figure 10-20 Question 1.

2 Figure 10-21 shows plots of angular position θ versus time t for three cases in which a disk is rotated like a merry-go-round. In each case, the rotation direction changes at a certain angular position θ_{change}. (a) For each case, determine whether θ_{change} is clockwise or counterclockwise from $\theta = 0$, or whether it is at $\theta = 0$. For each case, determine (b) whether ω is zero before, after, or at $t = 0$ and (c) whether α is positive, negative, or zero.



Figure 10-21 Question 2.

3 A force is applied to the rim of a disk that can rotate like a merry-go-round, so as to change its angular velocity. Its initial and final angular velocities, respectively, for four situations are: (a) −2 rad/s, 5 rad/s; (b) 2 rad/s, 5 rad/s; (c) −2 rad/s, −5 rad/s; and (d) 2 rad/s, −5 rad/s. Rank the situations according to the work done by the torque due to the force, greatest first.

4 Figure 10-22*b* is a graph of the angular position of the rotating disk of Fig. 10-22*a*. Is the angular velocity of the disk positive, negative, or zero at (a) $t = 1$ s, (b) $t = 2$ s, and (c) $t = 3$ s? (d) Is the angular acceleration positive or negative?

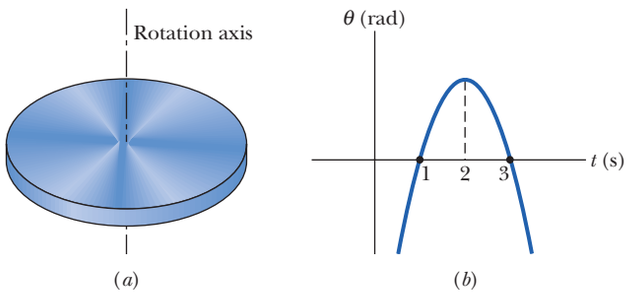

Figure 10-22 Question 4.

5 In Fig. 10-23, two forces $\vec{F}_1$ and $\vec{F}_2$ act on a disk that turns about its center like a merry-go-round. The forces maintain the indicated angles during the rotation, which is counterclockwise and at a constant rate. However, we are to decrease the angle θ of $\vec{F}_1$ without changing the magnitude of $\vec{F}_1$. (a) To keep the angular speed constant, should we increase, decrease, or maintain the magnitude of $\vec{F}_2$? Do forces (b) $\vec{F}_1$ and (c) $\vec{F}_2$ tend to rotate the disk clockwise or counterclockwise?



Figure 10-23 Question 5.

6 In the overhead view of Fig. 10-24, five forces of the same magnitude act on a strange merry-go-round; it is a square that can rotate about point P, at midlength along one of the edges. Rank the forces according to the magnitude of the torque they create about point P, greatest first.



Figure 10-24 Question 6.

7 Figure 10-25*a* is an overhead view of a horizontal bar that can pivot; two horizontal forces act on the bar, but it is stationary. If the angle between the bar and $\vec{F}_2$ is now decreased from 90° and the bar is still not to turn, should F_2 be made larger, made smaller, or left the same?

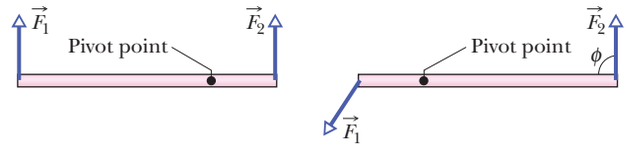

Figure 10-25 Questions 7 and 8.

8 Figure 10-25*b* shows an overhead view of a horizontal bar that is rotated about the pivot point by two horizontal forces, $\vec{F}_1$ and $\vec{F}_2$, with $\vec{F}_2$ at angle ϕ to the bar. Rank the following values of ϕ according to the magnitude of the angular acceleration of the bar, greatest first: 90°, 70°, and 110°.

9 Figure 10-26 shows a uniform metal plate that had been square before 25% of it was snipped off. Three lettered points are indicated. Rank them according to the rotational inertia of the plate around a perpendicular axis through them, greatest first.



Figure 10-26 Question 9.

IPR2024-01137
CamelBak EX 2023
Page 56 of 96

10 Figure 10-27 shows three flat disks (of the same radius) that can rotate about their centers like merry-go-rounds. Each disk consists of the same two materials, one denser than the other (density is mass per unit volume). In disks 1 and 3, the denser material forms the outer half of the disk area. In disk 2, it forms the inner half of the disk area. Forces with identical magnitudes are applied tangentially to the disk, either at the outer edge or at the interface of the two materials, as shown. Rank the disks according to (a) the torque about the disk center, (b) the rotational inertia about the disk center, and (c) the angular acceleration of the disk, greatest first.

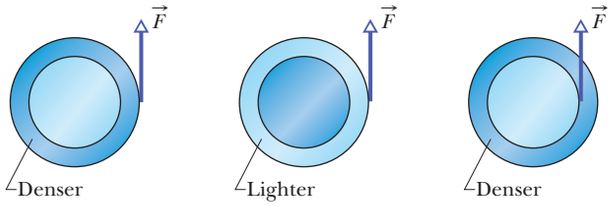

Figure 10-27 Question 10.

11 Figure 10-28*a* shows a meter stick, half wood and half steel, that is pivoted at the wood end at *O*. A force $\vec{F}$ is applied to the steel end at *a*. In Fig. 10-28*b*, the stick is reversed and pivoted at the steel end at *O′*, and the same force is applied at the wood end at *a′*. Is the resulting angular acceleration of Fig. 10-28*a* greater than, less than, or the same as that of Fig. 10-28*b*?



Figure 10-28 Question 11.

12 Figure 10-29 shows three disks, each with a uniform distribution of mass. The radii *R* and masses *M* are indicated. Each disk can rotate around its central axis (perpendicular to the disk face and through the center). Rank the disks according to their rotational inertias calculated about their central axes, greatest first.



Figure 10-29 Question 12.

Problems

Tutoring problem available (at instructor's discretion) in *WileyPLUS* and WebAssign
SSM Worked-out solution available in Student Solutions Manual
WWW Worked-out solution is at http://www.wiley.com/college/halliday
• – ••• Number of dots indicates level of problem difficulty
ILW Interactive solution is at
Additional information available in *The Flying Circus of Physics* and at flyingcircusofphysics.com

Module 10-1 Rotational Variables

•1 A good baseball pitcher can throw a baseball toward home plate at 85 mi/h with a spin of 1800 rev/min. How many revolutions does the baseball make on its way to home plate? For simplicity, assume that the 60 ft path is a straight line.

•2 What is the angular speed of (a) the second hand, (b) the minute hand, and (c) the hour hand of a smoothly running analog watch? Answer in radians per second.

••3 When a slice of buttered toast is accidentally pushed over the edge of a counter, it rotates as it falls. If the distance to the floor is 76 cm and for rotation less than 1 rev, what are the (a) smallest and (b) largest angular speeds that cause the toast to hit and then topple to be butter-side down?

••4 The angular position of a point on a rotating wheel is given by $\theta = 2.0 + 4.0t^2 + 2.0t^3$, where θ is in radians and t is in seconds. At $t = 0$, what are (a) the point's angular position and (b) its angular velocity? (c) What is its angular velocity at $t = 4.0$ s? (d) Calculate its angular acceleration at $t = 2.0$ s. (e) Is its angular acceleration constant?

••5 ILW A diver makes 2.5 revolutions on the way from a 10-m-high platform to the water. Assuming zero initial vertical velocity, find the average angular velocity during the dive.

••6 The angular position of a point on the rim of a rotating wheel is given by $\theta = 4.0t - 3.0t^2 + t^3$, where θ is in radians and t is in seconds. What are the angular velocities at (a) $t = 2.0$ s and (b) $t = 4.0$ s? (c) What is the average angular acceleration for the time interval that begins at $t = 2.0$ s and ends at $t = 4.0$ s? What are the instantaneous angular accelerations at (d) the beginning and (e) the end of this time interval?

•••7 The wheel in Fig. 10-30 has eight equally spaced spokes and a radius of 30 cm. It is mounted on a fixed axle and is spinning at 2.5 rev/s. You want to shoot a 20-cm-long arrow parallel to this axle and through the wheel without hitting any of the spokes. Assume that the arrow and the spokes are very thin. (a) What minimum speed must the arrow have? (b) Does it matter where between the axle and rim of the wheel you aim? If so, what is the best location?



Figure 10-30 Problem 7.

•••8 The angular acceleration of a wheel is $\alpha = 6.0t^4 - 4.0t^2$, with α in radians per second-squared and t in seconds. At time $t = 0$, the wheel has an angular velocity of +2.0 rad/s and an angular position of +1.0 rad. Write expressions for (a) the angular velocity (rad/s) and (b) the angular position (rad) as functions of time (s).

Module 10-2 Rotation with Constant Angular Acceleration

•9 A drum rotates around its central axis at an angular velocity of 12.60 rad/s. If the drum then slows at a constant rate of 4.20 rad/s^2, (a) how much time does it take and (b) through what angle does it rotate in coming to rest?

•10 Starting from rest, a disk rotates about its central axis with constant angular acceleration. In 5.0 s, it rotates 25 rad. During that time, what are the magnitudes of (a) the angular acceleration and (b) the average angular velocity? (c) What is the instantaneous angular velocity of the disk at the end of the 5.0 s? (d) With the angular acceleration unchanged, through what additional angle will the disk turn during the next 5.0 s?

•11 A disk, initially rotating at 120 rad/s, is slowed down with a constant angular acceleration of magnitude 4.0 rad/s^2. (a) How much time does the disk take to stop? (b) Through what angle does the disk rotate during that time?

•12 The angular speed of an automobile engine is increased at a constant rate from 1200 rev/min to 3000 rev/min in 12 s. (a) What is

IPR2024-01137
CamelBak EX 2023
Page 57 of 96

its angular acceleration in revolutions per minute-squared? (b) How many revolutions does the engine make during this 12 s interval?

••13 ILW A flywheel turns through 40 rev as it slows from an angular speed of 1.5 rad/s to a stop. (a) Assuming a constant angular acceleration, find the time for it to come to rest. (b) What is its angular acceleration? (c) How much time is required for it to complete the first 20 of the 40 revolutions?

••14 GO A disk rotates about its central axis starting from rest and accelerates with constant angular acceleration. At one time it is rotating at 10 rev/s; 60 revolutions later, its angular speed is 15 rev/s. Calculate (a) the angular acceleration, (b) the time required to complete the 60 revolutions, (c) the time required to reach the 10 rev/s angular speed, and (d) the number of revolutions from rest until the time the disk reaches the 10 rev/s angular speed.

••15 SSM Starting from rest, a wheel has constant $\alpha = 3.0\ \text{rad/s}^2$. During a certain 4.0 s interval, it turns through 120 rad. How much time did it take to reach that 4.0 s interval?

••16 A merry-go-round rotates from rest with an angular acceleration of $1.50\ \text{rad/s}^2$. How long does it take to rotate through (a) the first 2.00 rev and (b) the next 2.00 rev?

••17 At $t = 0$, a flywheel has an angular velocity of 4.7 rad/s, a constant angular acceleration of $-0.25\ \text{rad/s}^2$, and a reference line at $\theta_0 = 0$. (a) Through what maximum angle θ_{max} will the reference line turn in the positive direction? What are the (b) first and (c) second times the reference line will be at $\theta = \frac{1}{2}\theta_{\text{max}}$? At what (d) negative time and (e) positive time will the reference line be at $\theta = 10.5$ rad? (f) Graph θ versus t, and indicate your answers.

•••18 A pulsar is a rapidly rotating neutron star that emits a radio beam the way a lighthouse emits a light beam. We receive a radio pulse for each rotation of the star. The period T of rotation is found by measuring the time between pulses. The pulsar in the Crab nebula has a period of rotation of $T = 0.033$ s that is increasing at the rate of 1.26×10^{-5} s/y. (a) What is the pulsar's angular acceleration α? (b) If α is constant, how many years from now will the pulsar stop rotating? (c) The pulsar originated in a supernova explosion seen in the year 1054. Assuming constant α, find the initial T.

Module 10-3 Relating the Linear and Angular Variables

•19 What are the magnitudes of (a) the angular velocity, (b) the radial acceleration, and (c) the tangential acceleration of a spaceship taking a circular turn of radius 3220 km at a speed of 29 000 km/h?

•20 An object rotates about a fixed axis, and the angular position of a reference line on the object is given by $\theta = 0.40e^{2t}$, where θ is in radians and t is in seconds. Consider a point on the object that is 4.0 cm from the axis of rotation. At $t = 0$, what are the magnitudes of the point's (a) tangential component of acceleration and (b) radial component of acceleration?

•21 Between 1911 and 1990, the top of the leaning bell tower at Pisa, Italy, moved toward the south at an average rate of 1.2 mm/y. The tower is 55 m tall. In radians per second, what is the average angular speed of the tower's top about its base?

•22 An astronaut is tested in a centrifuge with radius 10 m and rotating according to $\theta = 0.30t^2$. At $t = 5.0$ s, what are the magnitudes of the (a) angular velocity, (b) linear velocity, (c) tangential acceleration, and (d) radial acceleration?

•23 SSM WWW A flywheel with a diameter of 1.20 m is rotating at an angular speed of 200 rev/min. (a) What is the angular speed of the flywheel in radians per second? (b) What is the linear speed of a point on the rim of the flywheel? (c) What constant angular acceleration (in revolutions per minute-squared) will increase the wheel's angular speed to 1000 rev/min in 60.0 s? (d) How many revolutions does the wheel make during that 60.0 s?

•24 A vinyl record is played by rotating the record so that an approximately circular groove in the vinyl slides under a stylus. Bumps in the groove run into the stylus, causing it to oscillate. The equipment converts those oscillations to electrical signals and then to sound. Suppose that a record turns at the rate of $33\frac{1}{3}$ rev/min, the groove being played is at a radius of 10.0 cm, and the bumps in the groove are uniformly separated by 1.75 mm. At what rate (hits per second) do the bumps hit the stylus?

••25 SSM (a) What is the angular speed ω about the polar axis of a point on Earth's surface at latitude 40° N? (Earth rotates about that axis.) (b) What is the linear speed v of the point? What are (c) ω and (d) v for a point at the equator?

••26 The flywheel of a steam engine runs with a constant angular velocity of 150 rev/min. When steam is shut off, the friction of the bearings and of the air stops the wheel in 2.2 h. (a) What is the constant angular acceleration, in revolutions per minute-squared, of the wheel during the slowdown? (b) How many revolutions does the wheel make before stopping? (c) At the instant the flywheel is turning at 75 rev/min, what is the tangential component of the linear acceleration of a flywheel particle that is 50 cm from the axis of rotation? (d) What is the magnitude of the net linear acceleration of the particle in (c)?

••27 A seed is on a turntable rotating at $33\frac{1}{3}$ rev/min, 6.0 cm from the rotation axis. What are (a) the seed's acceleration and (b) the least coefficient of static friction to avoid slippage? (c) If the turntable had undergone constant angular acceleration from rest in 0.25 s, what is the least coefficient to avoid slippage?

••28 In Fig. 10-31, wheel A of radius $r_A = 10$ cm is coupled by belt B to wheel C of radius $r_C = 25$ cm. The angular speed of wheel A is increased from rest at a constant rate of $1.6\ \text{rad/s}^2$. Find the time needed for wheel C to reach an angular speed of 100 rev/min, assuming the belt does not slip. (*Hint:* If the belt does not slip, the linear speeds at the two rims must be equal.)



Figure 10-31 Problem 28.

••29 Figure 10-32 shows an early method of measuring the speed of light that makes use of a rotating slotted wheel. A beam of

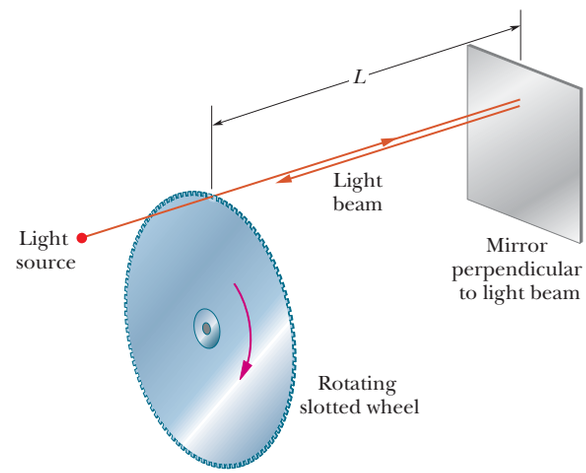

Figure 10-32 Problem 29.

IPR2024-01137
CamelBak EX 2023
Page 58 of 96

light passes through one of the slots at the outside edge of the wheel, travels to a distant mirror, and returns to the wheel just in time to pass through the next slot in the wheel. One such slotted wheel has a radius of 5.0 cm and 500 slots around its edge. Measurements taken when the mirror is $L = 500$ m from the wheel indicate a speed of light of 3.0×10^5 km/s. (a) What is the (constant) angular speed of the wheel? (b) What is the linear speed of a point on the edge of the wheel?

••30 A gyroscope flywheel of radius 2.83 cm is accelerated from rest at 14.2 rad/s^2 until its angular speed is 2760 rev/min. (a) What is the tangential acceleration of a point on the rim of the flywheel during this spin-up process? (b) What is the radial acceleration of this point when the flywheel is spinning at full speed? (c) Through what distance does a point on the rim move during the spin-up?

••31 GO A disk, with a radius of 0.25 m, is to be rotated like a merry-go-round through 800 rad, starting from rest, gaining angular speed at the constant rate α_1 through the first 400 rad and then losing angular speed at the constant rate $-\alpha_1$ until it is again at rest. The magnitude of the centripetal acceleration of any portion of the disk is not to exceed 400 m/s^2. (a) What is the least time required for the rotation? (b) What is the corresponding value of α_1?

••32 A car starts from rest and moves around a circular track of radius 30.0 m. Its speed increases at the constant rate of 0.500 m/s^2. (a) What is the magnitude of its *net* linear acceleration 15.0 s later? (b) What angle does this net acceleration vector make with the car's velocity at this time?

Module 10-4 Kinetic Energy of Rotation

•33 SSM Calculate the rotational inertia of a wheel that has a kinetic energy of 24 400 J when rotating at 602 rev/min.

•34 Figure 10-33 gives angular speed versus time for a thin rod that rotates around one end. The scale on the ω axis is set by $\omega_s = 6.0$ rad/s. (a) What is the magnitude of the rod's angular acceleration? (b) At $t = 4.0$ s, the rod has a rotational kinetic energy of 1.60 J. What is its kinetic energy at $t = 0$?



Figure 10-33 Problem 34.

Module 10-5 Calculating the Rotational Inertia

•35 SSM Two uniform solid cylinders, each rotating about its central (longitudinal) axis at 235 rad/s, have the same mass of 1.25 kg but differ in radius. What is the rotational kinetic energy of (a) the smaller cylinder, of radius 0.25 m, and (b) the larger cylinder, of radius 0.75 m?

•36 Figure 10-34*a* shows a disk that can rotate about an axis at a radial distance h from the center of the disk. Figure 10-34*b* gives the rotational inertia I of the disk about the axis as a function of that distance h, from the center out to the edge of the disk. The scale on the I axis is set by $I_A = 0.050$ kg·m^2 and $I_B = 0.150$ kg·m^2. What is the mass of the disk?

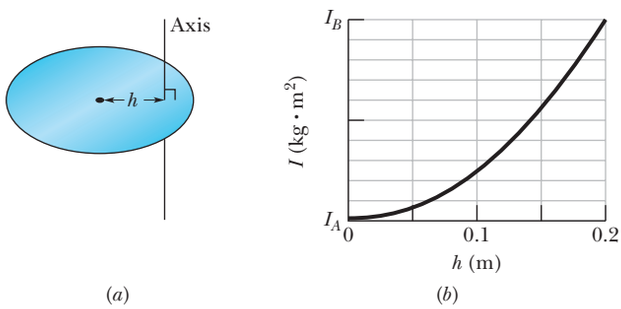

Figure 10-34 Problem 36.

•37 SSM Calculate the rotational inertia of a meter stick, with mass 0.56 kg, about an axis perpendicular to the stick and located at the 20 cm mark. (Treat the stick as a thin rod.)

•38 Figure 10-35 shows three 0.0100 kg particles that have been glued to a rod of length $L = 6.00$ cm and negligible mass. The assembly can rotate around a perpendicular axis through point O at the left end. If we remove one particle (that is, 33% of the mass), by what percentage does the rotational inertia of the assembly around the rotation axis decrease when that removed particle is (a) the innermost one and (b) the outermost one?



Figure 10-35 Problems 38 and 62.

••39 Trucks can be run on energy stored in a rotating flywheel, with an electric motor getting the flywheel up to its top speed of 200π rad/s. Suppose that one such flywheel is a solid, uniform cylinder with a mass of 500 kg and a radius of 1.0 m. (a) What is the kinetic energy of the flywheel after charging? (b) If the truck uses an average power of 8.0 kW, for how many minutes can it operate between chargings?

••40 Figure 10-36 shows an arrangement of 15 identical disks that have been glued together in a rod-like shape of length $L = 1.0000$ m and (total) mass $M = 100.0$ mg. The disks are uniform, and the disk arrangement can rotate about a perpendicular axis through its central disk at point O. (a) What is the rotational inertia of the arrangement about that axis? (b) If we approximated the arrangement as being a uniform rod of mass M and length L, what percentage error would we make in using the formula in Table 10-2*e* to calculate the rotational inertia?



Figure 10-36 Problem 40.

••41 GO In Fig. 10-37, two particles, each with mass $m = 0.85$ kg, are fastened to each other, and to a rotation axis at O, by two thin rods, each with length $d = 5.6$ cm and mass $M = 1.2$ kg. The combination rotates around the rotation axis with the angular speed $\omega = 0.30$ rad/s. Measured about O, what are the combination's (a) rotational inertia and (b) kinetic energy?



Figure 10-37 Problem 41.

••42 The masses and coordinates of four particles are as follows: 50 g, $x = 2.0$ cm, $y = 2.0$ cm; 25 g, $x = 0$, $y = 4.0$ cm; 25 g, $x = -3.0$ cm, $y = -3.0$ cm; 30 g, $x = -2.0$ cm, $y = 4.0$ cm. What are the rotational inertias of this collection about the (a) x, (b) y, and (c) z axes? (d) Suppose that we symbolize the answers to (a) and (b) as A and B, respectively. Then what is the answer to (c) in terms of A and B?

IPR2024-01137
CamelBak EX 2023
Page 59 of 96

••43 SSM WWW The uniform solid block in Fig. 10-38 has mass 0.172 kg and edge lengths $a = 3.5$ cm, $b = 8.4$ cm, and $c = 1.4$ cm. Calculate its rotational inertia about an axis through one corner and perpendicular to the large faces.



Figure 10-38 Problem 43.

••44 Four identical particles of mass 0.50 kg each are placed at the vertices of a 2.0 m × 2.0 m square and held there by four massless rods, which form the sides of the square. What is the rotational inertia of this rigid body about an axis that (a) passes through the midpoints of opposite sides and lies in the plane of the square, (b) passes through the midpoint of one of the sides and is perpendicular to the plane of the square, and (c) lies in the plane of the square and passes through two diagonally opposite particles?

Module 10-6 Torque

•45 SSM ILW The body in Fig. 10-39 is pivoted at O, and two forces act on it as shown. If $r_1 = 1.30$ m, $r_2 = 2.15$ m, $F_1 = 4.20$ N, $F_2 = 4.90$ N, $\theta_1 = 75.0°$, and $\theta_2 = 60.0°$, what is the net torque about the pivot?



Figure 10-39 Problem 45.

•46 The body in Fig. 10-40 is pivoted at O. Three forces act on it: $F_A = 10$ N at point A, 8.0 m from O; $F_B = 16$ N at B, 4.0 m from O; and $F_C = 19$ N at C, 3.0 m from O. What is the net torque about O?



Figure 10-40 Problem 46.

•47 SSM A small ball of mass 0.75 kg is attached to one end of a 1.25-m-long massless rod, and the other end of the rod is hung from a pivot. When the resulting pendulum is 30° from the vertical, what is the magnitude of the gravitational torque calculated about the pivot?

•48 The length of a bicycle pedal arm is 0.152 m, and a downward force of 111 N is applied to the pedal by the rider. What is the magnitude of the torque about the pedal arm's pivot when the arm is at angle (a) 30°, (b) 90°, and (c) 180° with the vertical?

Module 10-7 Newton's Second Law for Rotation

•49 SSM ILW During the launch from a board, a diver's angular speed about her center of mass changes from zero to 6.20 rad/s in 220 ms. Her rotational inertia about her center of mass is 12.0 kg·m^2. During the launch, what are the magnitudes of (a) her average angular acceleration and (b) the average external torque on her from the board?

•50 If a 32.0 N·m torque on a wheel causes angular acceleration 25.0 rad/s^2, what is the wheel's rotational inertia?

••51 GO In Fig. 10-41, block 1 has mass $m_1 = 460$ g, block 2 has mass $m_2 = 500$ g, and the pulley, which is mounted on a horizontal axle with negligible friction, has radius $R = 5.00$ cm. When released from rest, block 2 falls 75.0 cm in 5.00 s without the cord slipping on the pulley. (a) What is the magnitude of the acceleration of the blocks? What are (b) tension T_2 and (c) tension T_1? (d) What is the magnitude of the pulley's angular acceleration? (e) What is its rotational inertia?



Figure 10-41 Problems 51 and 83.

••52 GO In Fig. 10-42, a cylinder having a mass of 2.0 kg can rotate about its central axis through point O. Forces are applied as shown: $F_1 = 6.0$ N, $F_2 = 4.0$ N, $F_3 = 2.0$ N, and $F_4 = 5.0$ N. Also, $r = 5.0$ cm and $R = 12$ cm. Find the (a) magnitude and (b) direction of the angular acceleration of the cylinder. (During the rotation, the forces maintain their same angles relative to the cylinder.)

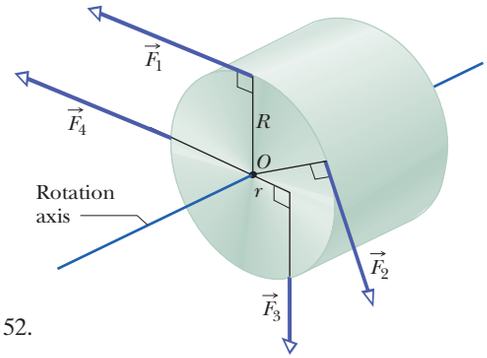

Figure 10-42 Problem 52.

••53 GO Figure 10-43 shows a uniform disk that can rotate around its center like a merry-go-round. The disk has a radius of 2.00 cm and a mass of 20.0 grams and is initially at rest. Starting at time $t = 0$, two forces are to be applied tangentially to the rim as indicated, so that at time $t = 1.25$ s the disk has an angular velocity of 250 rad/s counterclockwise. Force $\vec{F}_1$ has a magnitude of 0.100 N. What is magnitude F_2?



Figure 10-43 Problem 53.

••54 In a judo foot-sweep move, you sweep your opponent's left foot out from under him while pulling on his gi (uniform) toward that side. As a result, your opponent rotates around his right foot and onto the mat. Figure 10-44 shows a simplified diagram of your opponent as you face him, with his left foot swept out. The rotational axis is through point O. The gravitational force $\vec{F}_g$ on him effectively acts at his center of mass, which is a horizontal distance $d = 28$ cm from point O. His mass is 70 kg, and his rotational inertia about point O is 65 kg·m^2. What is the magnitude of his initial angular acceleration about point O if your pull $\vec{F}_a$ on his gi is (a) negligible and (b) horizontal with a magnitude of 300 N and applied at height $h = 1.4$ m?

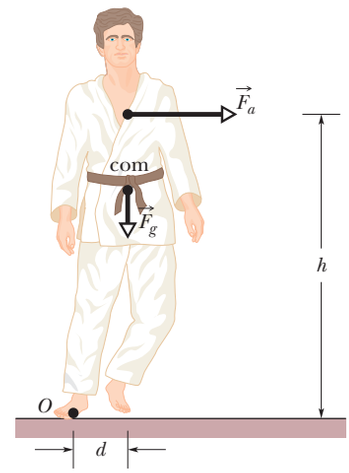

Figure 10-44 Problem 54.

••55 GO In Fig. 10-45*a*, an irregularly shaped plastic plate with uniform thickness and density (mass per unit volume) is to be rotated around an axle that is perpendicular to the plate face and through point O. The rotational inertia of the plate about

IPR2024-01137
CamelBak EX 2023
Page 60 of 96

that axle is measured with the following method. A circular disk of mass 0.500 kg and radius 2.00 cm is glued to the plate, with its center aligned with point O (Fig. 10-45*b*). A string is wrapped around the edge of the disk the way a string is wrapped around a top. Then the string is pulled for 5.00 s. As a result, the disk and plate are rotated by a constant force of 0.400 N that is applied by the string tangentially to the edge of the disk. The resulting angular speed is 114 rad/s. What is the rotational inertia of the plate about the axle?



Figure 10-45 Problem 55.

••56 Figure 10-46 shows particles 1 and 2, each of mass m, fixed to the ends of a rigid massless rod of length $L_1 + L_2$, with $L_1 = 20$ cm and $L_2 = 80$ cm. The rod is held horizontally on the fulcrum and then released. What are the magnitudes of the initial accelerations of (a) particle 1 and (b) particle 2?



Figure 10-46 Problem 56.

•••57 A pulley, with a rotational inertia of 1.0×10^{-3} kg·m^2 about its axle and a radius of 10 cm, is acted on by a force applied tangentially at its rim. The force magnitude varies in time as $F = 0.50t + 0.30t^2$, with F in newtons and t in seconds. The pulley is initially at rest. At $t = 3.0$ s what are its (a) angular acceleration and (b) angular speed?

Module 10-8 Work and Rotational Kinetic Energy

•58 (a) If $R = 12$ cm, $M = 400$ g, and $m = 50$ g in Fig. 10-19, find the speed of the block after it has descended 50 cm starting from rest. Solve the problem using energy conservation principles. (b) Repeat (a) with $R = 5.0$ cm.

•59 An automobile crankshaft transfers energy from the engine to the axle at the rate of 100 hp (= 74.6 kW) when rotating at a speed of 1800 rev/min. What torque (in newton-meters) does the crankshaft deliver?

•60 A thin rod of length 0.75 m and mass 0.42 kg is suspended freely from one end. It is pulled to one side and then allowed to swing like a pendulum, passing through its lowest position with angular speed 4.0 rad/s. Neglecting friction and air resistance, find (a) the rod's kinetic energy at its lowest position and (b) how far above that position the center of mass rises.

•61 A 32.0 kg wheel, essentially a thin hoop with radius 1.20 m, is rotating at 280 rev/min. It must be brought to a stop in 15.0 s. (a) How much work must be done to stop it? (b) What is the required average power?

••62 In Fig. 10-35, three 0.0100 kg particles have been glued to a rod of length $L = 6.00$ cm and negligible mass and can rotate around a perpendicular axis through point O at one end. How much work is required to change the rotational rate (a) from 0 to 20.0 rad/s, (b) from 20.0 rad/s to 40.0 rad/s, and (c) from 40.0 rad/s to 60.0 rad/s? (d) What is the slope of a plot of the assembly's kinetic energy (in joules) versus the square of its rotation rate (in radians-squared per second-squared)?

••63 SSM ILW A meter stick is held vertically with one end on the floor and is then allowed to fall. Find the speed of the other end just before it hits the floor, assuming that the end on the floor does not slip. (*Hint:* Consider the stick to be a thin rod and use the conservation of energy principle.)

••64 A uniform cylinder of radius 10 cm and mass 20 kg is mounted so as to rotate freely about a horizontal axis that is parallel to and 5.0 cm from the central longitudinal axis of the cylinder. (a) What is the rotational inertia of the cylinder about the axis of rotation? (b) If the cylinder is released from rest with its central longitudinal axis at the same height as the axis about which the cylinder rotates, what is the angular speed of the cylinder as it passes through its lowest position?

•••65 A tall, cylindrical chimney falls over when its base is ruptured. Treat the chimney as a thin rod of length 55.0 m. At the instant it makes an angle of 35.0° with the vertical as it falls, what are (a) the radial acceleration of the top, and (b) the tangential acceleration of the top. (*Hint:* Use energy considerations, not a torque.) (c) At what angle θ is the tangential acceleration equal to g?

•••66 A uniform spherical shell of mass $M = 4.5$ kg and radius $R = 8.5$ cm can rotate about a vertical axis on frictionless bearings (Fig. 10-47). A massless cord passes around the equator of the shell, over a pulley of rotational inertia $I = 3.0 \times 10^{-3}$ kg·m^2 and radius $r = 5.0$ cm, and is attached to a small object of mass $m = 0.60$ kg. There is no friction on the pulley's axle; the cord does not slip on the pulley. What is the speed of the object when it has fallen 82 cm after being released from rest? Use energy considerations.

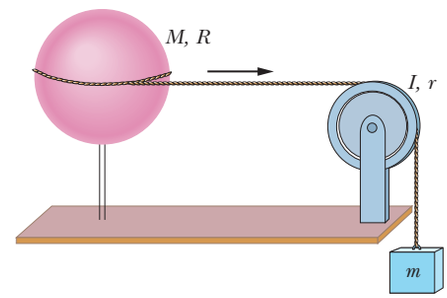

Figure 10-47 Problem 66.

•••67 Figure 10-48 shows a rigid assembly of a thin hoop (of mass m and radius $R = 0.150$ m) and a thin radial rod (of mass m and length $L = 2.00R$). The assembly is upright, but if we give it a slight nudge, it will rotate around a horizontal axis in the plane of the rod and hoop, through the lower end of the rod. Assuming that the energy given to the assembly in such a nudge is negligible, what would be the assembly's angular speed about the rotation axis when it passes through the upside-down (inverted) orientation?



Figure 10-48 Problem 67.

Additional Problems

68 Two uniform solid spheres have the same mass of 1.65 kg, but one has a radius of 0.226 m and the other has a radius of 0.854 m. Each can rotate about an axis through its center. (a) What is the magnitude τ of the torque required to bring the smaller sphere from rest to an angular speed of 317 rad/s in 15.5 s? (b) What is the magnitude F of the force that must be applied tangentially at the sphere's equator to give that torque? What are the corresponding values of (c) τ and (d) F for the larger sphere?



Figure 10-49 Problem 69.

69 In Fig. 10-49, a small disk of radius $r = 2.00$ cm has been glued to the edge of a larger disk of radius $R = 4.00$ cm so that

IPR2024-01137
CamelBak EX 2023
Page 61 of 96

the disks lie in the same plane. The disks can be rotated around a perpendicular axis through point O at the center of the larger disk. The disks both have a uniform density (mass per unit volume) of 1.40×10^3 kg/m^3 and a uniform thickness of 5.00 mm. What is the rotational inertia of the two-disk assembly about the rotation axis through O?

70 A wheel, starting from rest, rotates with a constant angular acceleration of 2.00 rad/s^2. During a certain 3.00 s interval, it turns through 90.0 rad. (a) What is the angular velocity of the wheel at the start of the 3.00 s interval? (b) How long has the wheel been turning before the start of the 3.00 s interval?

71 SSM In Fig. 10-50, two 6.20 kg blocks are connected by a massless string over a pulley of radius 2.40 cm and rotational inertia 7.40×10^{-4} kg·m^2. The string does not slip on the pulley; it is not known whether there is friction between the table and the sliding block; the pulley's axis is frictionless. When this system is released from rest, the pulley turns through 0.130 rad in 91.0 ms and the acceleration of the blocks is constant. What are (a) the magnitude of the pulley's angular acceleration, (b) the magnitude of either block's acceleration, (c) string tension T_1, and (d) string tension T_2?



Figure 10-50 Problem 71.

72 Attached to each end of a thin steel rod of length 1.20 m and mass 6.40 kg is a small ball of mass 1.06 kg. The rod is constrained to rotate in a horizontal plane about a vertical axis through its midpoint. At a certain instant, it is rotating at 39.0 rev/s. Because of friction, it slows to a stop in 32.0 s. Assuming a constant retarding torque due to friction, compute (a) the angular acceleration, (b) the retarding torque, (c) the total energy transferred from mechanical energy to thermal energy by friction, and (d) the number of revolutions rotated during the 32.0 s. (e) Now suppose that the retarding torque is known not to be constant. If any of the quantities (a), (b), (c), and (d) can still be computed without additional information, give its value.

73 A uniform helicopter rotor blade is 7.80 m long, has a mass of 110 kg, and is attached to the rotor axle by a single bolt. (a) What is the magnitude of the force on the bolt from the axle when the rotor is turning at 320 rev/min? (*Hint:* For this calculation the blade can be considered to be a point mass at its center of mass. Why?) (b) Calculate the torque that must be applied to the rotor to bring it to full speed from rest in 6.70 s. Ignore air resistance. (The blade cannot be considered to be a point mass for this calculation. Why not? Assume the mass distribution of a uniform thin rod.) (c) How much work does the torque do on the blade in order for the blade to reach a speed of 320 rev/min?

74 *Racing disks.* Figure 10-51 shows two disks that can rotate about their centers like a merry-go-round. At time $t = 0$, the reference lines of the two disks have the same orientation. Disk A is already rotating, with a constant angular velocity of 9.5 rad/s. Disk B has been stationary but now begins to rotate at a constant angular acceleration of 2.2 rad/s^2. (a) At what time t will the reference lines of the two disks momentarily have the same angular displacement θ? (b) Will that time t be the first time since $t = 0$ that the reference lines are momentarily aligned?



Figure 10-51 Problem 74.

75 A high-wire walker always attempts to keep his center of mass over the wire (or rope). He normally carries a long, heavy pole to help: If he leans, say, to his right (his com moves to the right) and is in danger of rotating around the wire, he moves the pole to his left (its com moves to the left) to slow the rotation and allow himself time to adjust his balance. Assume that the walker has a mass of 70.0 kg and a rotational inertia of 15.0 kg·m^2 about the wire. What is the magnitude of his angular acceleration about the wire if his com is 5.0 cm to the right of the wire and (a) he carries no pole and (b) the 14.0 kg pole he carries has its com 10 cm to the left of the wire?

76 Starting from rest at $t = 0$, a wheel undergoes a constant angular acceleration. When $t = 2.0$ s, the angular velocity of the wheel is 5.0 rad/s. The acceleration continues until $t = 20$ s, when it abruptly ceases. Through what angle does the wheel rotate in the interval $t = 0$ to $t = 40$ s?

77 SSM A record turntable rotating at $33\frac{1}{3}$ rev/min slows down and stops in 30 s after the motor is turned off. (a) Find its (constant) angular acceleration in revolutions per minute-squared. (b) How many revolutions does it make in this time?

78 GO A rigid body is made of three identical thin rods, each with length $L = 0.600$ m, fastened together in the form of a letter **H** (Fig. 10-52). The body is free to rotate about a horizontal axis that runs along the length of one of the legs of the **H**. The body is allowed to fall from rest from a position in which the plane of the **H** is horizontal. What is the angular speed of the body when the plane of the **H** is vertical?



Figure 10-52 Problem 78.

79 SSM (a) Show that the rotational inertia of a solid cylinder of mass M and radius R about its central axis is equal to the rotational inertia of a thin hoop of mass M and radius $R/\sqrt{2}$ about its central axis. (b) Show that the rotational inertia I of any given body of mass M about any given axis is equal to the rotational inertia of an *equivalent hoop* about that axis, if the hoop has the same mass M and a radius k given by

$$k = \sqrt{\frac{I}{M}}.$$

The radius k of the equivalent hoop is called the *radius of gyration* of the given body.

80 A disk rotates at constant angular acceleration, from angular position $\theta_1 = 10.0$ rad to angular position $\theta_2 = 70.0$ rad in 6.00 s. Its angular velocity at θ_2 is 15.0 rad/s. (a) What was its angular velocity at θ_1? (b) What is the angular acceleration? (c) At what angular position was the disk initially at rest? (d) Graph θ versus time t and angular speed ω versus t for the disk, from the beginning of the motion (let $t = 0$ then).

81 GO The thin uniform rod in Fig. 10-53 has length 2.0 m and can pivot about a horizontal, frictionless pin through one end. It is released from rest at angle $\theta = 40°$ above the horizontal. Use the principle of conservation of energy to determine the angular speed of the rod as it passes through the horizontal position.



Figure 10-53 Problem 81.

82 George Washington Gale Ferris, Jr., a civil engineering graduate from Rensselaer Polytechnic Institute, built the original Ferris wheel for the 1893 World's Columbian Exposition in Chicago. The wheel, an astounding engineering construction at the time, carried 36 wooden cars, each holding up to 60 passengers, around a circle 76 m in diameter. The cars were loaded 6 at a time, and once all 36 cars were full, the wheel made a complete

IPR2024-01137
CamelBak EX 2023
Page 62 of 96

rotation at constant angular speed in about 2 min. Estimate the amount of work that was required of the machinery to rotate the passengers alone.

83 In Fig. 10-41, two blocks, of mass $m_1 = 400$ g and $m_2 = 600$ g, are connected by a massless cord that is wrapped around a uniform disk of mass $M = 500$ g and radius $R = 12.0$ cm. The disk can rotate without friction about a fixed horizontal axis through its center; the cord cannot slip on the disk. The system is released from rest. Find (a) the magnitude of the acceleration of the blocks, (b) the tension T_1 in the cord at the left, and (c) the tension T_2 in the cord at the right.

84 At 7:14 A.M. on June 30, 1908, a huge explosion occurred above remote central Siberia, at latitude 61° N and longitude 102° E; the fireball thus created was the brightest flash seen by anyone before nuclear weapons. The *Tunguska Event,* which according to one chance witness "covered an enormous part of the sky," was probably the explosion of a *stony asteroid* about 140 m wide. (a) Considering only Earth's rotation, determine how much later the asteroid would have had to arrive to put the explosion above Helsinki at longitude 25° E. This would have obliterated the city. (b) If the asteroid had, instead, been a *metallic asteroid,* it could have reached Earth's surface. How much later would such an asteroid have had to arrive to put the impact in the Atlantic Ocean at longitude 20° W? (The resulting tsunamis would have wiped out coastal civilization on both sides of the Atlantic.)

85 A golf ball is launched at an angle of 20° to the horizontal, with a speed of 60 m/s and a rotation rate of 90 rad/s. Neglecting air drag, determine the number of revolutions the ball makes by the time it reaches maximum height.

86 Figure 10-54 shows a flat construction of two circular rings that have a common center and are held together by three rods of negligible mass. The construction, which is initially at rest, can rotate around the common center (like a merry-go-round), where another rod of negligible mass lies. The mass, inner radius, and outer radius of the rings are given in the following table. A tangential force of magnitude 12.0 N is applied to the outer edge of the outer ring for 0.300 s. What is the change in the angular speed of the construction during the time interval?



Figure 10-54 Problem 86.

Ring	Mass (kg)	Inner Radius (m)	Outer Radius (m)
1	0.120	0.0160	0.0450
2	0.240	0.0900	0.1400

87 In Fig. 10-55, a wheel of radius 0.20 m is mounted on a frictionless horizontal axle. A massless cord is wrapped around the wheel and attached to a 2.0 kg box that slides on a frictionless surface inclined at angle $\theta = 20°$ with the horizontal. The box accelerates down the surface at 2.0 m/s^2. What is the rotational inertia of the wheel about the axle?



Figure 10-55 Problem 87.

88 A thin spherical shell has a radius of 1.90 m. An applied torque of 960 N·m gives the shell an angular acceleration of 6.20 rad/s^2 about an axis through the center of the shell. What are (a) the rotational inertia of the shell about that axis and (b) the mass of the shell?

89 A bicyclist of mass 70 kg puts all his mass on each downward-moving pedal as he pedals up a steep road. Take the diameter of the circle in which the pedals rotate to be 0.40 m, and determine the magnitude of the maximum torque he exerts about the rotation axis of the pedals.

90 The flywheel of an engine is rotating at 25.0 rad/s. When the engine is turned off, the flywheel slows at a constant rate and stops in 20.0 s. Calculate (a) the angular acceleration of the flywheel, (b) the angle through which the flywheel rotates in stopping, and (c) the number of revolutions made by the flywheel in stopping.

91 SSM In Fig. 10-19*a*, a wheel of radius 0.20 m is mounted on a frictionless horizontal axis. The rotational inertia of the wheel about the axis is 0.40 kg·m^2. A massless cord wrapped around the wheel's circumference is attached to a 6.0 kg box. The system is released from rest. When the box has a kinetic energy of 6.0 J, what are (a) the wheel's rotational kinetic energy and (b) the distance the box has fallen?

92 Our Sun is 2.3×10^4 ly (light-years) from the center of our Milky Way galaxy and is moving in a circle around that center at a speed of 250 km/s. (a) How long does it take the Sun to make one revolution about the galactic center? (b) How many revolutions has the Sun completed since it was formed about 4.5×10^9 years ago?

93 SSM A wheel of radius 0.20 m is mounted on a frictionless horizontal axis. The rotational inertia of the wheel about the axis is 0.050 kg·m^2. A massless cord wrapped around the wheel is attached to a 2.0 kg block that slides on a horizontal frictionless surface. If a horizontal force of magnitude $P = 3.0$ N is applied to the block as shown in Fig. 10-56, what is the magnitude of the angular acceleration of the wheel? Assume the cord does not slip on the wheel.



Figure 10-56 Problem 93.

94 If an airplane propeller rotates at 2000 rev/min while the airplane flies at a speed of 480 km/h relative to the ground, what is the linear speed of a point on the tip of the propeller, at radius 1.5 m, as seen by (a) the pilot and (b) an observer on the ground? The plane's velocity is parallel to the propeller's axis of rotation.

95 The rigid body shown in Fig. 10-57 consists of three particles connected by massless rods. It is to be rotated about an axis perpendicular to its plane through point *P*. If $M = 0.40$ kg, $a = 30$ cm, and $b = 50$ cm, how much work is required to take the body from rest to an angular speed of 5.0 rad/s?



Figure 10-57 Problem 95.

96 *Beverage engineering.* The pull tab was a major advance in the engineering design of beverage containers. The tab pivots on a central bolt in the can's top. When you pull upward on one end of the tab, the other end presses downward on a portion of the can's top that has been scored. If you pull upward with a 10 N force, what force magnitude acts on the scored section? (You will need to examine a can with a pull tab.)

97 Figure 10-58 shows a propeller blade that rotates at 2000 rev/min about a perpendicular axis at point *B*. Point *A* is at the outer tip of the blade, at radial distance 1.50 m. (a) What is the difference in the magnitudes *a* of the centripetal acceleration of point *A* and of a point at radial distance 0.150 m? (b) Find the slope of a plot of *a* versus radial distance along the blade.

Figure 10-58 Problem 97.

IPR2024-01137
CamelBak EX 2023
Page 63 of 96

98 A yo-yo-shaped device mounted on a horizontal frictionless axis is used to lift a 30 kg box as shown in Fig. 10-59. The outer radius R of the device is 0.50 m, and the radius r of the hub is 0.20 m. When a constant horizontal force $\vec{F}_{app}$ of magnitude 140 N is applied to a rope wrapped around the outside of the device, the box, which is suspended from a rope wrapped around the hub, has an upward acceleration of magnitude 0.80 m/s^2. What is the rotational inertia of the device about its axis of rotation?

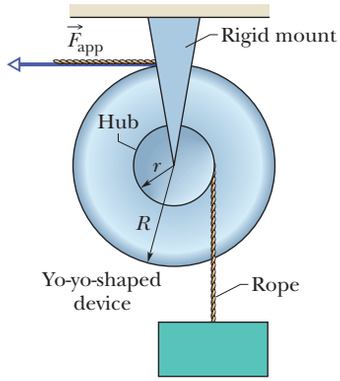

Figure 10-59 Problem 98.

99 A small ball with mass 1.30 kg is mounted on one end of a rod 0.780 m long and of negligible mass. The system rotates in a horizontal circle about the other end of the rod at 5010 rev/min. (a) Calculate the rotational inertia of the system about the axis of rotation. (b) There is an air drag of 2.30×10^{-2} N on the ball, directed opposite its motion. What torque must be applied to the system to keep it rotating at constant speed?

100 Two thin rods (each of mass 0.20 kg) are joined together to form a rigid body as shown in Fig. 10-60. One of the rods has length $L_1 = 0.40$ m, and the other has length $L_2 = 0.50$ m. What is the rotational inertia of this rigid body about (a) an axis that is perpendicular to the plane of the paper and passes through the center of the shorter rod and (b) an axis that is perpendicular to the plane of the paper and passes through the center of the longer rod?



Figure 10-60 Problem 100.

101 In Fig. 10-61, four pulleys are connected by two belts. Pulley A (radius 15 cm) is the drive pulley, and it rotates at 10 rad/s. Pulley B (radius 10 cm) is connected by belt 1 to pulley A. Pulley B' (radius 5 cm) is concentric with pulley B and is rigidly attached to it. Pulley C (radius 25 cm) is connected by belt 2 to pulley B'. Calculate (a) the linear speed of a point on belt 1, (b) the angular speed of pulley B, (c) the angular speed of pulley B', (d) the linear speed of a point on belt 2, and (e) the angular speed of pulley C. (*Hint:* If the belt between two pulleys does not slip, the linear speeds at the rims of the two pulleys must be equal.)



Figure 10-61 Problem 101.

102 The rigid object shown in Fig. 10-62 consists of three balls and three connecting rods, with $M = 1.6$ kg, $L = 0.60$ m, and $\theta = 30°$. The balls may be treated as particles, and the connecting rods have negligible mass. Determine the rotational kinetic energy of the object if it has an angular speed of 1.2 rad/s about (a) an axis that passes through point P and is perpendicular to the plane of the figure and (b) an axis that passes through point P, is perpendicular to the rod of length $2L$, and lies in the plane of the figure.

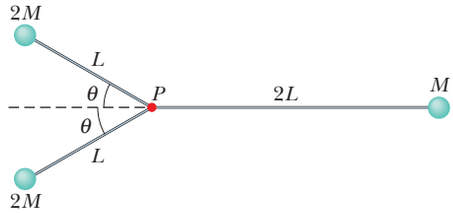

Figure 10-62 Problem 102.

103 In Fig. 10-63, a thin uniform rod (mass 3.0 kg, length 4.0 m) rotates freely about a horizontal axis A that is perpendicular to the rod and passes through a point at distance $d = 1.0$ m from the end of the rod. The kinetic energy of the rod as it passes through the vertical position is 20 J. (a) What is the rotational inertia of the rod about axis A? (b) What is the (linear) speed of the end B of the rod as the rod passes through the vertical position? (c) At what angle θ will the rod momentarily stop in its upward swing?

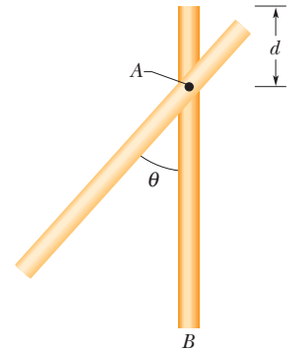

Figure 10-63 Problem 103.

104 Four particles, each of mass, 0.20 kg, are placed at the vertices of a square with sides of length 0.50 m. The particles are connected by rods of negligible mass. This rigid body can rotate in a vertical plane about a horizontal axis A that passes through one of the particles. The body is released from rest with rod AB horizontal (Fig. 10-64). (a) What is the rotational inertia of the body about axis A? (b) What is the angular speed of the body about axis A when rod AB swings through the vertical position?



Figure 10-64 Problem 104.

105 Cheetahs running at top speed have been reported at an astounding 114 km/h (about 71 mi/h) by observers driving alongside the animals. Imagine trying to measure a cheetah's speed by keeping your vehicle abreast of the animal while also glancing at your speedometer, which is registering 114 km/h. You keep the vehicle a constant 8.0 m from the cheetah, but the noise of the vehicle causes the cheetah to continuously veer away from you along a circular path of radius 92 m. Thus, you travel along a circular path of radius 100 m. (a) What is the angular speed of you and the cheetah around the circular paths? (b) What is the linear speed of the cheetah along its path? (If you did not account for the circular motion, you would conclude erroneously that the cheetah's speed is 114 km/h, and that type of error was apparently made in the published reports.)

106 A point on the rim of a 0.75-m-diameter grinding wheel changes speed at a constant rate from 12 m/s to 25 m/s in 6.2 s. What is the average angular acceleration of the wheel?

107 A pulley wheel that is 8.0 cm in diameter has a 5.6-m-long cord wrapped around its periphery. Starting from rest, the wheel is given a constant angular acceleration of 1.5 rad/s^2. (a) Through what angle must the wheel turn for the cord to unwind completely? (b) How long will this take?

108 A vinyl record on a turntable rotates at $33\frac{1}{3}$ rev/min. (a) What is its angular speed in radians per second? What is the linear speed of a point on the record (b) 15 cm and (c) 7.4 cm from the turntable axis?

IPR2024-01137
CamelBak EX 2023
Page 64 of 96

CHAPTER 11

Rolling, Torque, and Angular Momentum

11-1 ROLLING AS TRANSLATION AND ROTATION COMBINED

Learning Objectives

After reading this module, you should be able to . . .

11.01 Identify that smooth rolling can be considered as a combination of pure translation and pure rotation.

11.02 Apply the relationship between the center-of-mass speed and the angular speed of a body in smooth rolling.

Key Ideas

- For a wheel of radius R rolling smoothly,

$$v_{com} = \omega R,$$

where v_{com} is the linear speed of the wheel's center of mass and ω is the angular speed of the wheel about its center.

- The wheel may also be viewed as rotating instantaneously about the point P of the "road" that is in contact with the wheel. The angular speed of the wheel about this point is the same as the angular speed of the wheel about its center.

What Is Physics?

As we discussed in Chapter 10, physics includes the study of rotation. Arguably, the most important application of that physics is in the rolling motion of wheels and wheel-like objects. This applied physics has long been used. For example, when the prehistoric people of Easter Island moved their gigantic stone statues from the quarry and across the island, they dragged them over logs acting as rollers. Much later, when settlers moved westward across America in the 1800s, they rolled their possessions first by wagon and then later by train. Today, like it or not, the world is filled with cars, trucks, motorcycles, bicycles, and other rolling vehicles.

The physics and engineering of rolling have been around for so long that you might think no fresh ideas remain to be developed. However, skateboards and inline skates were invented and engineered fairly recently, to become huge financial successes. Street luge is now catching on, and the self-righting Segway (Fig. 11-1) may change the way people move around in large cities. Applying the physics of rolling can still lead to surprises and rewards. Our starting point in exploring that physics is to simplify rolling motion.

Justin Sullivan/Getty Images, Inc.

Figure 11-1 The self-righting Segway Human Transporter.

Rolling as Translation and Rotation Combined

Here we consider only objects that *roll smoothly* along a surface; that is, the objects roll without slipping or bouncing on the surface. Figure 11-2 shows how complicated smooth rolling motion can be: Although the center of the object moves in a straight line parallel to the surface, a point on the rim certainly does not. However, we can study this motion by treating it as a combination of translation of the center of mass and rotation of the rest of the object around that center.

IPR2024-01137
CamelBak EX 2023
Page 65 of 96

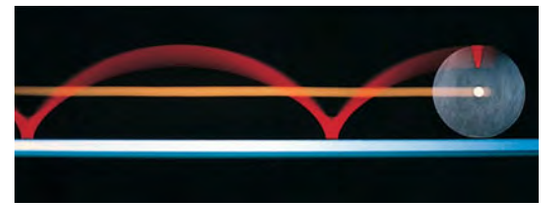

Figure 11-2 A time-exposure photograph of a rolling disk. Small lights have been attached to the disk, one at its center and one at its edge. The latter traces out a curve called a *cycloid.*

Richard Megna/Fundamental Photographs

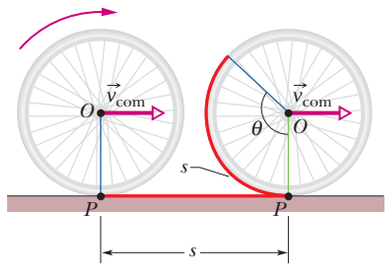

Figure 11-3 The center of mass O of a rolling wheel moves a distance s at velocity $\vec{v}_{com}$ while the wheel rotates through angle θ. The point P at which the wheel makes contact with the surface over which the wheel rolls also moves a distance s.

To see how we do this, pretend you are standing on a sidewalk watching the bicycle wheel of Fig. 11-3 as it rolls along a street. As shown, you see the center of mass O of the wheel move forward at constant speed v_{com}. The point P on the street where the wheel makes contact with the street surface also moves forward at speed v_{com}, so that P always remains directly below O.

During a time interval t, you see both O and P move forward by a distance s. The bicycle rider sees the wheel rotate through an angle θ about the center of the wheel, with the point of the wheel that was touching the street at the beginning of t moving through arc length s. Equation 10-17 relates the arc length s to the rotation angle θ:

$$s = \theta R, \tag{11-1}$$

where R is the radius of the wheel. The linear speed v_{com} of the center of the wheel (the center of mass of this uniform wheel) is ds/dt. The angular speed ω of the wheel about its center is $d\theta/dt$. Thus, differentiating Eq. 11-1 with respect to time (with R held constant) gives us

$$v_{com} = \omega R \quad \text{(smooth rolling motion).} \tag{11-2}$$

A Combination. Figure 11-4 shows that the rolling motion of a wheel is a combination of purely translational and purely rotational motions. Figure 11-4*a* shows the purely rotational motion (as if the rotation axis through the center were stationary): Every point on the wheel rotates about the center with angular speed ω. (This is the type of motion we considered in Chapter 10.) Every point on the outside edge of the wheel has linear speed v_{com} given by Eq. 11-2. Figure 11-4*b* shows the purely translational motion (as if the wheel did not rotate at all): Every point on the wheel moves to the right with speed v_{com}.

The combination of Figs. 11-4*a* and 11-4*b* yields the actual rolling motion of the wheel, Fig. 11-4*c*. Note that in this combination of motions, the portion of the wheel at the bottom (at point P) is stationary and the portion at the top

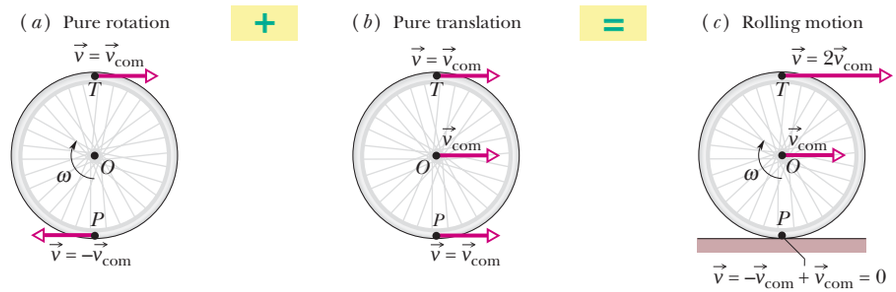

Figure 11-4 Rolling motion of a wheel as a combination of purely rotational motion and purely translational motion. (*a*) The purely rotational motion: All points on the wheel move with the same angular speed ω. Points on the outside edge of the wheel all move with the same linear speed $v = v_{com}$. The linear velocities $\vec{v}$ of two such points, at top (T) and bottom (P) of the wheel, are shown. (*b*) The purely translational motion: All points on the wheel move to the right with the same linear velocity $\vec{v}_{com}$. (*c*) The rolling motion of the wheel is the combination of (*a*) and (*b*).

IPR2024-01137
CamelBak EX 2023
Page 66 of 96

Courtesy Alice Halliday

Figure 11-5 A photograph of a rolling bicycle wheel. The spokes near the wheel's top are more blurred than those near the bottom because the top ones are moving faster, as Fig. 11-4*c* shows.

(at point T) is moving at speed $2v_{com}$, faster than any other portion of the wheel. These results are demonstrated in Fig. 11-5, which is a time exposure of a rolling bicycle wheel. You can tell that the wheel is moving faster near its top than near its bottom because the spokes are more blurred at the top than at the bottom.

The motion of any round body rolling smoothly over a surface can be separated into purely rotational and purely translational motions, as in Figs. 11-4*a* and 11-4*b*.

Rolling as Pure Rotation

Figure 11-6 suggests another way to look at the rolling motion of a wheel—namely, as pure rotation about an axis that always extends through the point where the wheel contacts the street as the wheel moves. We consider the rolling motion to be pure rotation about an axis passing through point P in Fig. 11-4*c* and perpendicular to the plane of the figure. The vectors in Fig. 11-6 then represent the instantaneous velocities of points on the rolling wheel.

Question: What angular speed about this new axis will a stationary observer assign to a rolling bicycle wheel?

Answer: The same ω that the rider assigns to the wheel as she or he observes it in pure rotation about an axis through its center of mass.

To verify this answer, let us use it to calculate the linear speed of the top of the rolling wheel from the point of view of a stationary observer. If we call the wheel's radius R, the top is a distance $2R$ from the axis through P in Fig. 11-6, so the linear speed at the top should be (using Eq. 11-2)

$$v_{top} = (\omega)(2R) = 2(\omega R) = 2v_{com},$$

in exact agreement with Fig. 11-4*c*. You can similarly verify the linear speeds shown for the portions of the wheel at points O and P in Fig. 11-4*c*.



Figure 11-6 Rolling can be viewed as pure rotation, with angular speed ω, about an axis that always extends through P. The vectors show the instantaneous linear velocities of selected points on the rolling wheel. You can obtain the vectors by combining the translational and rotational motions as in Fig. 11-4.

Checkpoint 1

The rear wheel on a clown's bicycle has twice the radius of the front wheel. (a) When the bicycle is moving, is the linear speed at the very top of the rear wheel greater than, less than, or the same as that of the very top of the front wheel? (b) Is the angular speed of the rear wheel greater than, less than, or the same as that of the front wheel?

IPR2024-01137
CamelBak EX 2023
Page 67 of 96

11-2 FORCES AND KINETIC ENERGY OF ROLLING

Learning Objectives

After reading this module, you should be able to . . .

11.03 Calculate the kinetic energy of a body in smooth rolling as the sum of the translational kinetic energy of the center of mass and the rotational kinetic energy around the center of mass.
11.04 Apply the relationship between the work done on a smoothly rolling object and the change in its kinetic energy.
11.05 For smooth rolling (and thus no sliding), conserve mechanical energy to relate initial energy values to the values at a later point.
11.06 Draw a free-body diagram of an accelerating body that is smoothly rolling on a horizontal surface or up or down a ramp.
11.07 Apply the relationship between the center-of-mass acceleration and the angular acceleration.
11.08 For smooth rolling of an object up or down a ramp, apply the relationship between the object's acceleration, its rotational inertia, and the angle of the ramp.

Key Ideas

- A smoothly rolling wheel has kinetic energy

$$K = \tfrac{1}{2}I_{\text{com}}\omega^2 + \tfrac{1}{2}Mv_{\text{com}}^2,$$

where I_{com} is the rotational inertia of the wheel about its center of mass and M is the mass of the wheel.

- If the wheel is being accelerated but is still rolling smoothly, the acceleration of the center of mass $\vec{a}_{\text{com}}$ is related to the angular acceleration α about the center with

$$a_{\text{com}} = \alpha R.$$

- If the wheel rolls smoothly down a ramp of angle θ, its acceleration along an x axis extending up the ramp is

$$a_{\text{com},x} = -\frac{g \sin\theta}{1 + I_{\text{com}}/MR^2}.$$

The Kinetic Energy of Rolling

Let us now calculate the kinetic energy of the rolling wheel as measured by the stationary observer. If we view the rolling as pure rotation about an axis through P in Fig. 11-6, then from Eq. 10-34 we have

$$K = \tfrac{1}{2}I_P\omega^2, \tag{11-3}$$

in which ω is the angular speed of the wheel and I_P is the rotational inertia of the wheel about the axis through P. From the parallel-axis theorem of Eq. 10-36 ($I = I_{\text{com}} + Mh^2$), we have

$$I_P = I_{\text{com}} + MR^2, \tag{11-4}$$

in which M is the mass of the wheel, I_{com} is its rotational inertia about an axis through its center of mass, and R (the wheel's radius) is the perpendicular distance h. Substituting Eq. 11-4 into Eq. 11-3, we obtain

$$K = \tfrac{1}{2}I_{\text{com}}\omega^2 + \tfrac{1}{2}MR^2\omega^2,$$

and using the relation $v_{\text{com}} = \omega R$ (Eq. 11-2) yields

$$K = \tfrac{1}{2}I_{\text{com}}\omega^2 + \tfrac{1}{2}Mv_{\text{com}}^2. \tag{11-5}$$

We can interpret the term $\frac{1}{2}I_{\text{com}}\omega^2$ as the kinetic energy associated with the rotation of the wheel about an axis through its center of mass (Fig. 11-4*a*), and the term $\frac{1}{2}Mv_{\text{com}}^2$ as the kinetic energy associated with the translational motion of the wheel's center of mass (Fig. 11-4*b*). Thus, we have the following rule:

A rolling object has two types of kinetic energy: a rotational kinetic energy ($\frac{1}{2}I_{\text{com}}\omega^2$) due to its rotation about its center of mass and a translational kinetic energy ($\frac{1}{2}Mv_{\text{com}}^2$) due to translation of its center of mass.

IPR2024-01137
CamelBak EX 2023
Page 68 of 96

The Forces of Rolling

Friction and Rolling

If a wheel rolls at constant speed, as in Fig. 11-3, it has no tendency to slide at the point of contact P, and thus no frictional force acts there. However, if a net force acts on the rolling wheel to speed it up or to slow it, then that net force causes acceleration $\vec{a}_{com}$ of the center of mass along the direction of travel. It also causes the wheel to rotate faster or slower, which means it causes an angular acceleration α. These accelerations tend to make the wheel slide at P. Thus, a frictional force must act on the wheel at P to oppose that tendency.

If the wheel *does not* slide, the force is a *static* frictional force $\vec{f}_s$ and the motion is smooth rolling. We can then relate the magnitudes of the linear acceleration $\vec{a}_{com}$ and the angular acceleration α by differentiating Eq. 11-2 with respect to time (with R held constant). On the left side, dv_{com}/dt is a_{com}, and on the right side $d\omega/dt$ is α. So, for smooth rolling we have

$$a_{com} = \alpha R \quad \text{(smooth rolling motion).} \tag{11-6}$$

If the wheel *does* slide when the net force acts on it, the frictional force that acts at P in Fig. 11-3 is a *kinetic* frictional force $\vec{f}_k$. The motion then is not smooth rolling, and Eq. 11-6 does not apply to the motion. In this chapter we discuss only smooth rolling motion.

Figure 11-7 shows an example in which a wheel is being made to rotate faster while rolling to the right along a flat surface, as on a bicycle at the start of a race. The faster rotation tends to make the bottom of the wheel slide to the left at point P. A frictional force at P, directed to the right, opposes this tendency to slide. If the wheel does not slide, that frictional force is a static frictional force $\vec{f}_s$ (as shown), the motion is smooth rolling, and Eq. 11-6 applies to the motion. (Without friction, bicycle races would be stationary and very boring.)

If the wheel in Fig. 11-7 were made to rotate slower, as on a slowing bicycle, we would change the figure in two ways: The directions of the center-of-mass acceleration $\vec{a}_{com}$ and the frictional force $\vec{f}_s$ at point P would now be to the left.



Figure 11-7 A wheel rolls horizontally without sliding while accelerating with linear acceleration $\vec{a}_{com}$, as on a bicycle at the start of a race. A static frictional force $\vec{f}_s$ acts on the wheel at P, opposing its tendency to slide.

Rolling Down a Ramp

Figure 11-8 shows a round uniform body of mass M and radius R rolling smoothly down a ramp at angle θ, along an x axis. We want to find an expression for the body's

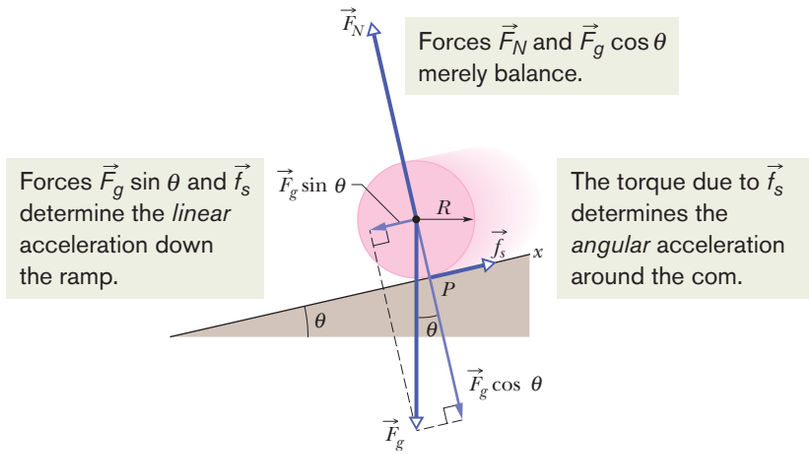

Figure 11-8 A round uniform body of radius R rolls down a ramp. The forces that act on it are the gravitational force $\vec{F}_g$, a normal force $\vec{F}_N$, and a frictional force $\vec{f}_s$ pointing up the ramp. (For clarity, vector $\vec{F}_N$ has been shifted in the direction it points until its tail is at the center of the body.)

IPR2024-01137
CamelBak EX 2023
Page 69 of 96

acceleration $a_{com,x}$ down the ramp. We do this by using Newton's second law in both its linear version ($F_{net} = Ma$) and its angular version ($\tau_{net} = I\alpha$).

We start by drawing the forces on the body as shown in Fig. 11-8:

1. The gravitational force $\vec{F}_g$ on the body is directed downward. The tail of the vector is placed at the center of mass of the body. The component along the ramp is $F_g \sin\theta$, which is equal to $Mg \sin\theta$.
2. A normal force $\vec{F}_N$ is perpendicular to the ramp. It acts at the point of contact P, but in Fig. 11-8 the vector has been shifted along its direction until its tail is at the body's center of mass.
3. A static frictional force $\vec{f}_s$ acts at the point of contact P and is directed up the ramp. (Do you see why? If the body were to slide at P, it would slide *down* the ramp. Thus, the frictional force opposing the sliding must be *up* the ramp.)

We can write Newton's second law for components along the x axis in Fig. 11-8 ($F_{net,x} = ma_x$) as

$$f_s - Mg \sin\theta = Ma_{com,x}. \tag{11-7}$$

This equation contains two unknowns, f_s and $a_{com,x}$. (We should *not* assume that f_s is at its maximum value $f_{s,max}$. All we know is that the value of f_s is just right for the body to roll smoothly down the ramp, without sliding.)

We now wish to apply Newton's second law in angular form to the body's rotation about its center of mass. First, we shall use Eq. 10-41 ($\tau = r_\perp F$) to write the torques on the body about that point. The frictional force $\vec{f}_s$ has moment arm R and thus produces a torque Rf_s, which is positive because it tends to rotate the body counterclockwise in Fig. 11-8. Forces $\vec{F}_g$ and $\vec{F}_N$ have zero moment arms about the center of mass and thus produce zero torques. So we can write the angular form of Newton's second law ($\tau_{net} = I\alpha$) about an axis through the body's center of mass as

$$Rf_s = I_{com}\alpha. \tag{11-8}$$

This equation contains two unknowns, f_s and α.

Because the body is rolling smoothly, we can use Eq. 11-6 ($a_{com} = \alpha R$) to relate the unknowns $a_{com,x}$ and α. But we must be cautious because here $a_{com,x}$ is negative (in the negative direction of the x axis) and α is positive (counterclockwise). Thus we substitute $-a_{com,x}/R$ for α in Eq. 11-8. Then, solving for f_s, we obtain

$$f_s = -I_{com}\frac{a_{com,x}}{R^2}. \tag{11-9}$$

Substituting the right side of Eq. 11-9 for f_s in Eq. 11-7, we then find

$$a_{com,x} = -\frac{g \sin\theta}{1 + I_{com}/MR^2}. \tag{11-10}$$

We can use this equation to find the linear acceleration $a_{com,x}$ of any body rolling along an incline of angle θ with the horizontal.

Note that the pull by the gravitational force causes the body to come down the ramp, but it is the frictional force that causes the body to rotate and thus roll. If you eliminate the friction (by, say, making the ramp slick with ice or grease) or arrange for $Mg \sin\theta$ to exceed $f_{s,max}$, then you eliminate the smooth rolling and the body slides down the ramp.

Checkpoint 2

Disks A and B are identical and roll across a floor with equal speeds. Then disk A rolls up an incline, reaching a maximum height h, and disk B moves up an incline that is identical except that it is frictionless. Is the maximum height reached by disk B greater than, less than, or equal to h?

IPR2024-01137
CamelBak EX 2023
Page 70 of 96

Sample Problem 11.01 Ball rolling down a ramp

A uniform ball, of mass $M = 6.00$ kg and radius R, rolls smoothly from rest down a ramp at angle $\theta = 30.0°$ (Fig. 11-8).

(a) The ball descends a vertical height $h = 1.20$ m to reach the bottom of the ramp. What is its speed at the bottom?

KEY IDEAS

The mechanical energy E of the ball–Earth system is conserved as the ball rolls down the ramp. The reason is that the only force doing work on the ball is the gravitational force, a conservative force. The normal force on the ball from the ramp does zero work because it is perpendicular to the ball's path. The frictional force on the ball from the ramp does not transfer any energy to thermal energy because the ball does not slide (it *rolls smoothly*).

Thus, we conserve mechanical energy ($E_f = E_i$):

$$K_f + U_f = K_i + U_i, \tag{11-11}$$

where subscripts f and i refer to the final values (at the bottom) and initial values (at rest), respectively. The gravitational potential energy is initially $U_i = Mgh$ (where M is the ball's mass) and finally $U_f = 0$. The kinetic energy is initially $K_i = 0$. For the final kinetic energy K_f, we need an additional idea: Because the ball rolls, the kinetic energy involves both translation *and* rotation, so we include them both by using the right side of Eq. 11-5.

Calculations: Substituting into Eq. 11-11 gives us

$$(\tfrac{1}{2}I_{com}\omega^2 + \tfrac{1}{2}Mv_{com}^2) + 0 = 0 + Mgh, \tag{11-12}$$

where I_{com} is the ball's rotational inertia about an axis through its center of mass, v_{com} is the requested speed at the bottom, and ω is the angular speed there.

Because the ball rolls smoothly, we can use Eq. 11-2 to substitute v_{com}/R for ω to reduce the unknowns in Eq. 11-12. Doing so, substituting $\frac{2}{5}MR^2$ for I_{com} (from Table 10-2*f*), and then solving for v_{com} give us

$$v_{com} = \sqrt{(\tfrac{10}{7})gh} = \sqrt{(\tfrac{10}{7})(9.8\ \text{m/s}^2)(1.20\ \text{m})}$$
$$= 4.10\ \text{m/s}. \qquad \text{(Answer)}$$

Note that the answer does not depend on M or R.

(b) What are the magnitude and direction of the frictional force on the ball as it rolls down the ramp?

KEY IDEA

Because the ball rolls smoothly, Eq. 11-9 gives the frictional force on the ball.

Calculations: Before we can use Eq. 11-9, we need the ball's acceleration $a_{com,x}$ from Eq. 11-10:

$$a_{com,x} = -\frac{g\sin\theta}{1 + I_{com}/MR^2} = -\frac{g\sin\theta}{1 + \frac{2}{5}MR^2/MR^2}$$
$$= -\frac{(9.8\ \text{m/s}^2)\sin 30.0°}{1 + \frac{2}{5}} = -3.50\ \text{m/s}^2.$$

Note that we needed neither mass M nor radius R to find $a_{com,x}$. Thus, any size ball with any uniform mass would have this smoothly rolling acceleration down a 30.0° ramp.

We can now solve Eq. 11-9 as

$$f_s = -I_{com}\frac{a_{com,x}}{R^2} = -\tfrac{2}{5}MR^2\frac{a_{com,x}}{R^2} = -\tfrac{2}{5}Ma_{com,x}$$
$$= -\tfrac{2}{5}(6.00\ \text{kg})(-3.50\ \text{m/s}^2) = 8.40\ \text{N}. \qquad \text{(Answer)}$$

Note that we needed mass M but not radius R. Thus, the frictional force on any 6.00 kg ball rolling smoothly down a 30.0° ramp would be 8.40 N regardless of the ball's radius but would be larger for a larger mass.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

11-3 THE YO-YO

Learning Objectives

After reading this module, you should be able to . . .

11.09 Draw a free-body diagram of a yo-yo moving up or down its string.

11.10 Identify that a yo-yo is effectively an object that rolls smoothly up or down a ramp with an incline angle of 90°.

11.11 For a yo-yo moving up or down its string, apply the relationship between the yo-yo's acceleration and its rotational inertia.

11.12 Determine the tension in a yo-yo's string as the yo-yo moves up or down its string.

Key Idea

- A yo-yo, which travels vertically up or down a string, can be treated as a wheel rolling along an inclined plane at angle $\theta = 90°$.

IPR2024-01137
CamelBak EX 2023
Page 71 of 96

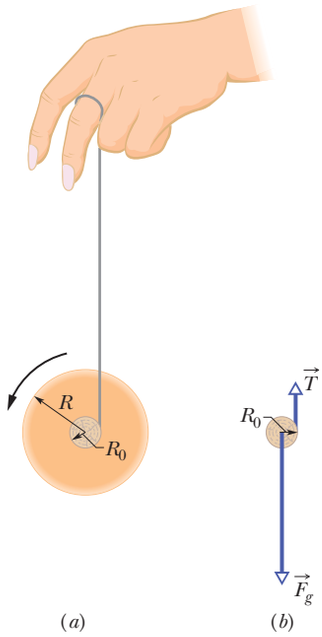

Figure 11-9 (*a*) A yo-yo, shown in cross section. The string, of assumed negligible thickness, is wound around an axle of radius R_0. (*b*) A free-body diagram for the falling yo-yo. Only the axle is shown.

The Yo-Yo

A yo-yo is a physics lab that you can fit in your pocket. If a yo-yo rolls down its string for a distance h, it loses potential energy in amount mgh but gains kinetic energy in both translational ($\frac{1}{2}Mv_{com}^2$) and rotational ($\frac{1}{2}I_{com}\omega^2$) forms. As it climbs back up, it loses kinetic energy and regains potential energy.

In a modern yo-yo, the string is not tied to the axle but is looped around it. When the yo-yo "hits" the bottom of its string, an upward force on the axle from the string stops the descent. The yo-yo then spins, axle inside loop, with only rotational kinetic energy. The yo-yo keeps spinning ("sleeping") until you "wake it" by jerking on the string, causing the string to catch on the axle and the yo-yo to climb back up. The rotational kinetic energy of the yo-yo at the bottom of its string (and thus the sleeping time) can be considerably increased by throwing the yo-yo downward so that it starts down the string with initial speeds v_{com} and ω instead of rolling down from rest.

To find an expression for the linear acceleration a_{com} of a yo-yo rolling down a string, we could use Newton's second law (in linear and angular forms) just as we did for the body rolling down a ramp in Fig. 11-8. The analysis is the same except for the following:

1. Instead of rolling down a ramp at angle θ with the horizontal, the yo-yo rolls down a string at angle $\theta = 90°$ with the horizontal.
2. Instead of rolling on its outer surface at radius R, the yo-yo rolls on an axle of radius R_0 (Fig. 11-9*a*).
3. Instead of being slowed by frictional force $\vec{f}_s$, the yo-yo is slowed by the force $\vec{T}$ on it from the string (Fig. 11-9*b*).

The analysis would again lead us to Eq. 11-10. Therefore, let us just change the notation in Eq. 11-10 and set $\theta = 90°$ to write the linear acceleration as

$$a_{com} = -\frac{g}{1 + I_{com}/MR_0^2}, \tag{11-13}$$

where I_{com} is the yo-yo's rotational inertia about its center and M is its mass. A yo-yo has the same downward acceleration when it is climbing back up.

11-4 TORQUE REVISITED

Learning Objectives

After reading this module, you should be able to . . .

11.13 Identify that torque is a vector quantity.
11.14 Identify that the point about which a torque is calculated must always be specified.
11.15 Calculate the torque due to a force on a particle by taking the cross product of the particle's position vector and the force vector, in either unit-vector notation or magnitude-angle notation.
11.16 Use the right-hand rule for cross products to find the direction of a torque vector.

Key Ideas

- In three dimensions, torque $\vec{\tau}$ is a vector quantity defined relative to a fixed point (usually an origin); it is

$$\vec{\tau} = \vec{r} \times \vec{F},$$

where $\vec{F}$ is a force applied to a particle and $\vec{r}$ is a position vector locating the particle relative to the fixed point.

- The magnitude of $\vec{\tau}$ is given by

$$\tau = rF \sin \phi = rF_\perp = r_\perp F,$$

where ϕ is the angle between $\vec{F}$ and $\vec{r}$, $F_\perp$ is the component of $\vec{F}$ perpendicular to $\vec{r}$, and $r_\perp$ is the moment arm of $\vec{F}$.

- The direction of $\vec{\tau}$ is given by the right-hand rule for cross products.

IPR2024-01137
CamelBak EX 2023
Page 72 of 96

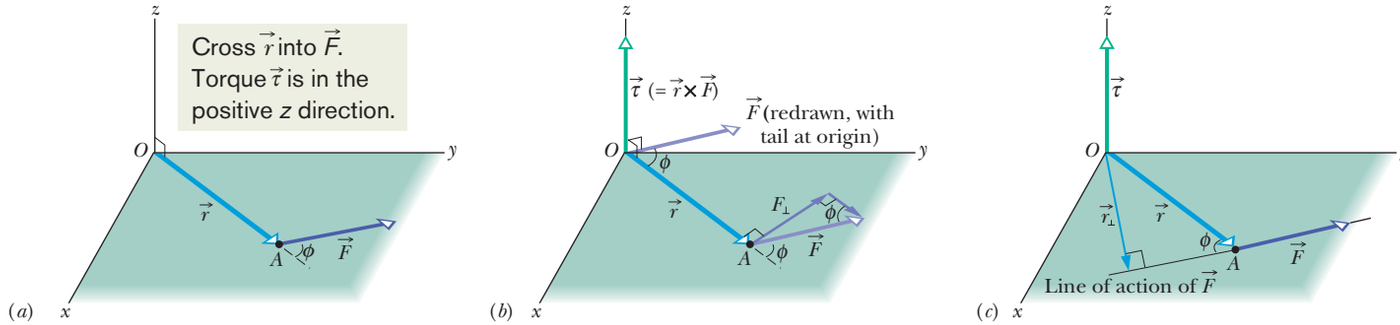

Figure 11-10 Defining torque. (*a*) A force $\vec{F}$, lying in an *xy* plane, acts on a particle at point *A*. (*b*) This force produces a torque $\vec{\tau}$ ($= \vec{r} \times \vec{F}$) on the particle with respect to the origin *O*. By the right-hand rule for vector (cross) products, the torque vector points in the positive direction of *z*. Its magnitude is given by $rF_\perp$ in (*b*) and by $r_\perp F$ in (*c*).

Torque Revisited

In Chapter 10 we defined torque τ for a rigid body that can rotate around a fixed axis. We now expand the definition of torque to apply it to an individual particle that moves along any path relative to a fixed *point* (rather than a fixed axis). The path need no longer be a circle, and we must write the torque as a vector $\vec{\tau}$ that may have any direction. We can calculate the magnitude of the torque with a formula and determine its direction with the right-hand rule for cross products.

Figure 11-10*a* shows such a particle at point *A* in an *xy* plane. A single force $\vec{F}$ in that plane acts on the particle, and the particle's position relative to the origin *O* is given by position vector $\vec{r}$. The torque $\vec{\tau}$ acting on the particle relative to the fixed point *O* is a vector quantity defined as

$$\vec{\tau} = \vec{r} \times \vec{F} \quad \text{(torque defined).} \tag{11-14}$$

We can evaluate the vector (or cross) product in this definition of $\vec{\tau}$ by using the rules in Module 3-3. To find the direction of $\vec{\tau}$, we slide the vector $\vec{F}$ (without changing its direction) until its tail is at the origin *O*, so that the two vectors in the vector product are tail to tail as in Fig. 11-10*b*. We then use the right-hand rule in Fig. 3-19*a*, sweeping the fingers of the right hand from $\vec{r}$ (the first vector in the product) into $\vec{F}$ (the second vector). The outstretched right thumb then gives the direction of $\vec{\tau}$. In Fig. 11-10*b*, it is in the positive direction of the *z* axis.

To determine the magnitude of $\vec{\tau}$, we apply the general result of Eq. 3-27 ($c = ab \sin \phi$), finding

$$\tau = rF \sin \phi, \tag{11-15}$$

where ϕ is the smaller angle between the directions of $\vec{r}$ and $\vec{F}$ when the vectors are tail to tail. From Fig. 11-10*b*, we see that Eq. 11-15 can be rewritten as

$$\tau = rF_\perp, \tag{11-16}$$

where $F_\perp$ ($= F \sin \phi$) is the component of $\vec{F}$ perpendicular to $\vec{r}$. From Fig. 11-10*c*, we see that Eq. 11-15 can also be rewritten as

$$\tau = r_\perp F, \tag{11-17}$$

where $r_\perp$ ($= r \sin \phi$) is the moment arm of $\vec{F}$ (the perpendicular distance between *O* and the line of action of $\vec{F}$).

Checkpoint 3

The position vector $\vec{r}$ of a particle points along the positive direction of a *z* axis. If the torque on the particle is (a) zero, (b) in the negative direction of *x*, and (c) in the negative direction of *y*, in what direction is the force causing the torque?

IPR2024-01137
CamelBak EX 2023
Page 73 of 96

Sample Problem 11.02 Torque on a particle due to a force

In Fig. 11-11*a*, three forces, each of magnitude 2.0 N, act on a particle. The particle is in the *xz* plane at point *A* given by position vector $\vec{r}$, where $r = 3.0$ m and $\theta = 30°$. What is the torque, about the origin *O*, due to each force?

KEY IDEA

Because the three force vectors do not lie in a plane, we must use cross products, with magnitudes given by Eq. 11-15 ($\tau = rF \sin \phi$) and directions given by the right-hand rule.

Calculations: Because we want the torques with respect to the origin *O*, the vector $\vec{r}$ required for each cross product is the given position vector. To determine the angle ϕ between $\vec{r}$ and each force, we shift the force vectors of Fig. 11-11*a*, each in turn, so that their tails are at the origin. Figures 11-11*b*, *c*, and *d*, which are direct views of the *xz* plane, show the shifted force vectors $\vec{F}_1$, $\vec{F}_2$, and $\vec{F}_3$, respectively. (Note how much easier the angles between the force vectors and the position vector are to see.) In Fig. 11-11*d*, the angle between the directions of $\vec{r}$ and $\vec{F}_3$ is 90° and the symbol $\otimes$ means $\vec{F}_3$ is directed into the page. (For out of the page, we would use $\odot$.)

Now, applying Eq. 11-15, we find

$$\tau_1 = rF_1 \sin \phi_1 = (3.0 \text{ m})(2.0 \text{ N})(\sin 150°) = 3.0 \text{ N} \cdot \text{m},$$

$$\tau_2 = rF_2 \sin \phi_2 = (3.0 \text{ m})(2.0 \text{ N})(\sin 120°) = 5.2 \text{ N} \cdot \text{m},$$

and
$$\tau_3 = rF_3 \sin \phi_3 = (3.0 \text{ m})(2.0 \text{ N})(\sin 90°)$$
$$= 6.0 \text{ N} \cdot \text{m}. \quad \text{(Answer)}$$

Next, we use the right-hand rule, placing the fingers of the right hand so as to rotate $\vec{r}$ into $\vec{F}$ through the *smaller* of the two angles between their directions. The thumb points in the direction of the torque. Thus $\vec{\tau}_1$ is directed into the page in Fig. 11-11*b*; $\vec{\tau}_2$ is directed out of the page in Fig. 11-11*c*; and $\vec{\tau}_3$ is directed as shown in Fig. 11-11*d*. All three torque vectors are shown in Fig. 11-11*e*.

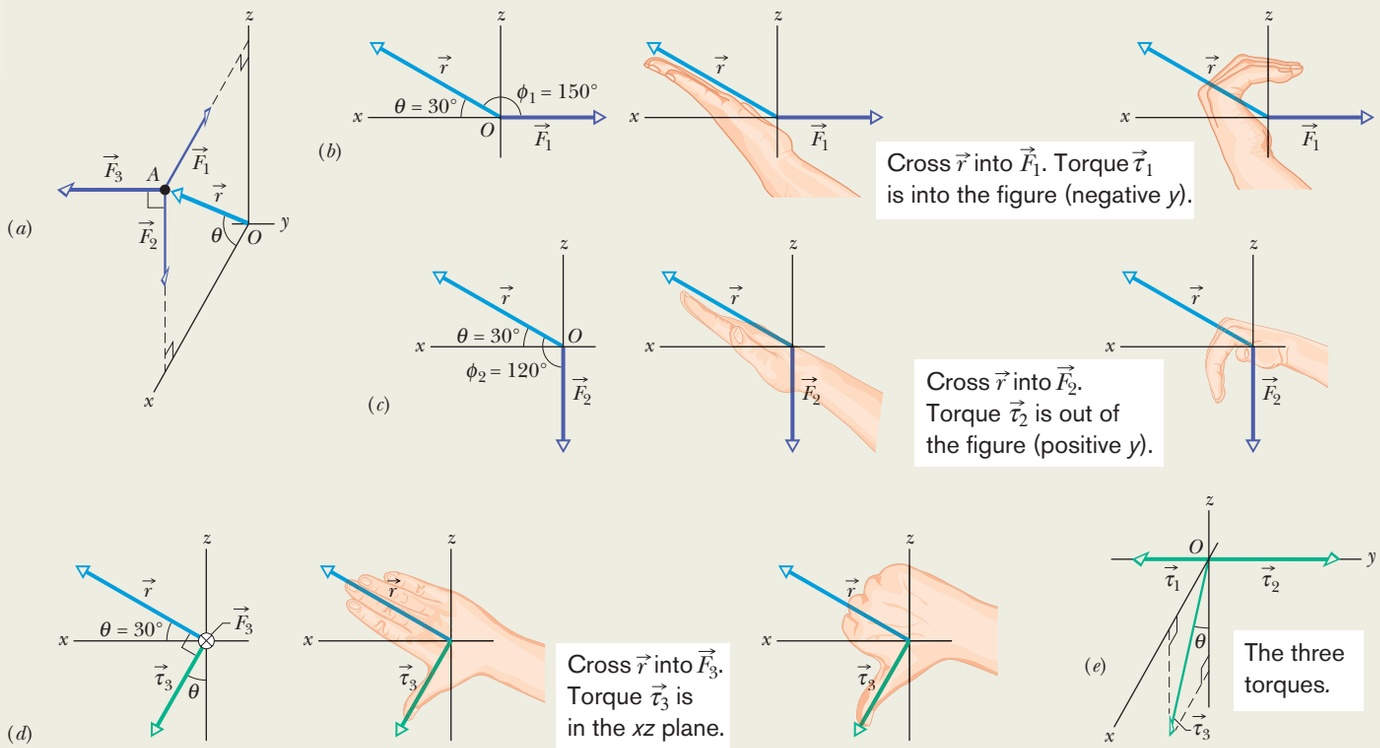

Figure 11-11 (*a*) A particle at point *A* is acted on by three forces, each parallel to a coordinate axis. The angle ϕ (used in finding torque) is shown (*b*) for $\vec{F}_1$ and (*c*) for $\vec{F}_2$. (*d*) Torque $\vec{\tau}_3$ is perpendicular to both $\vec{r}$ and $\vec{F}_3$ (force $\vec{F}_3$ is directed into the plane of the figure). (*e*) The torques.

IPR2024-01137
CamelBak EX 2023
Page 74 of 96

11-5 ANGULAR MOMENTUM

Learning Objectives

After reading this module, you should be able to . . .

11.17 Identify that angular momentum is a vector quantity.
11.18 Identify that the fixed point about which an angular momentum is calculated must always be specified.
11.19 Calculate the angular momentum of a particle by taking the cross product of the particle's position vector and its momentum vector, in either unit-vector notation or magnitude-angle notation.
11.20 Use the right-hand rule for cross products to find the direction of an angular momentum vector.

Key Ideas

- The angular momentum $\vec{\ell}$ of a particle with linear momentum $\vec{p}$, mass m, and linear velocity $\vec{v}$ is a vector quantity defined relative to a fixed point (usually an origin) as

$$\vec{\ell} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v}).$$

- The magnitude of $\vec{\ell}$ is given by

$$\begin{aligned} \ell &= rmv \sin \phi \\ &= rp_\perp = rmv_\perp \\ &= r_\perp p = r_\perp mv, \end{aligned}$$

where ϕ is the angle between $\vec{r}$ and $\vec{p}$, $p_\perp$ and $v_\perp$ are the components of $\vec{p}$ and $\vec{v}$ perpendicular to $\vec{r}$, and $r_\perp$ is the perpendicular distance between the fixed point and the extension of $\vec{p}$.

- The direction of $\vec{\ell}$ is given by the right-hand rule: Position your right hand so that the fingers are in the direction of $\vec{r}$. Then rotate them around the palm to be in the direction of $\vec{p}$. Your outstretched thumb gives the direction of $\vec{\ell}$.

Angular Momentum

Recall that the concept of linear momentum $\vec{p}$ and the principle of conservation of linear momentum are extremely powerful tools. They allow us to predict the outcome of, say, a collision of two cars without knowing the details of the collision. Here we begin a discussion of the angular counterpart of $\vec{p}$, winding up in Module 11-8 with the angular counterpart of the conservation principle, which can lead to beautiful (almost magical) feats in ballet, fancy diving, ice skating, and many other activities.

Figure 11-12 shows a particle of mass m with linear momentum $\vec{p}\,(= m\vec{v})$ as it passes through point A in an xy plane. The **angular momentum** $\vec{\ell}$ of this particle with respect to the origin O is a vector quantity defined as

$$\vec{\ell} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v}) \quad \text{(angular momentum defined)}, \tag{11-18}$$

where $\vec{r}$ is the position vector of the particle with respect to O. As the particle moves relative to O in the direction of its momentum $\vec{p}\,(= m\vec{v})$, position vector $\vec{r}$ rotates around O. Note carefully that to have angular momentum about O, the particle does *not* itself have to rotate around O. Comparison of Eqs. 11-14 and 11-18 shows that angular momentum bears the same relation to linear momentum that torque does to force. The SI unit of angular momentum is the kilogram-meter-squared per second ($\text{kg} \cdot \text{m}^2/\text{s}$), equivalent to the joule-second ($\text{J} \cdot \text{s}$).

Direction. To find the direction of the angular momentum vector $\vec{\ell}$ in Fig. 11-12, we slide the vector $\vec{p}$ until its tail is at the origin O. Then we use the right-hand rule for vector products, sweeping the fingers from $\vec{r}$ into $\vec{p}$. The outstretched thumb then shows that the direction of $\vec{\ell}$ is in the positive direction of the z axis in Fig. 11-12. This positive direction is consistent with the counterclockwise rotation of position vector $\vec{r}$ about the z axis, as the particle moves. (A negative direction of $\vec{\ell}$ would be consistent with a clockwise rotation of $\vec{r}$ about the z axis.)

Magnitude. To find the magnitude of $\vec{\ell}$, we use the general result of Eq. 3-27 to write

$$\ell = rmv \sin \phi, \tag{11-19}$$

where ϕ is the smaller angle between $\vec{r}$ and $\vec{p}$ when these two vectors are tail

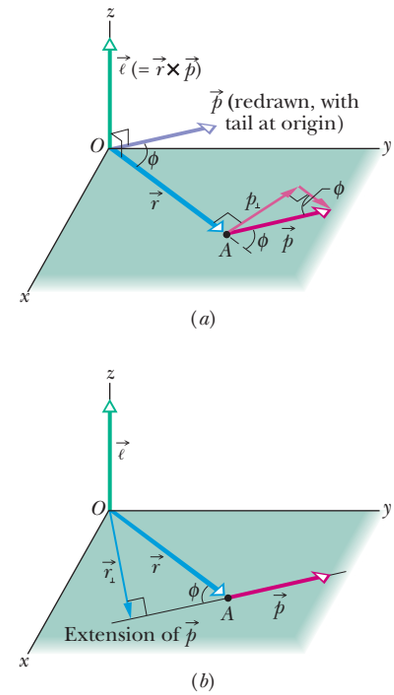

Figure 11-12 Defining angular momentum. A particle passing through point A has linear momentum $\vec{p}\,(= m\vec{v})$, with the vector $\vec{p}$ lying in an xy plane. The particle has angular momentum $\vec{\ell}\,(= \vec{r} \times \vec{p})$ with respect to the origin O. By the right-hand rule, the angular momentum vector points in the positive direction of z. (*a*) The magnitude of $\vec{\ell}$ is given by $\ell = rp_\perp = rmv_\perp$. (*b*) The magnitude of $\vec{\ell}$ is also given by $\ell = r_\perp p = r_\perp mv$.

IPR2024-01137
CamelBak EX 2023
Page 75 of 96

to tail. From Fig. 11-12*a*, we see that Eq. 11-19 can be rewritten as

$$\ell = rp_\perp = rmv_\perp, \tag{11-20}$$

where $p_\perp$ is the component of $\vec{p}$ perpendicular to $\vec{r}$ and $v_\perp$ is the component of $\vec{v}$ perpendicular to $\vec{r}$. From Fig. 11-12*b*, we see that Eq. 11-19 can also be rewritten as

$$\ell = r_\perp p = r_\perp mv, \tag{11-21}$$

where $r_\perp$ is the perpendicular distance between O and the extension of $\vec{p}$.

Important. Note two features here: (1) angular momentum has meaning only with respect to a specified origin and (2) its direction is always perpendicular to the plane formed by the position and linear momentum vectors $\vec{r}$ and $\vec{p}$.

Checkpoint 4

In part *a* of the figure, particles 1 and 2 move around point O in circles with radii 2 m and 4 m. In part *b*, particles 3 and 4 travel along straight lines at perpendicular distances of 4 m and 2 m from point O. Particle 5 moves directly away from O. All five particles have the same mass and the same constant speed. (a) Rank the particles according to the magnitudes of their angular momentum about point O, greatest first. (b) Which particles have negative angular momentum about point O?

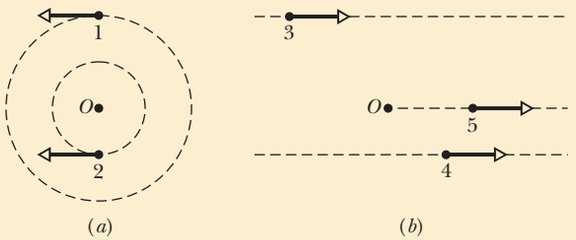

Sample Problem 11.03 Angular momentum of a two-particle system

Figure 11-13 shows an overhead view of two particles moving at constant momentum along horizontal paths. Particle 1, with momentum magnitude $p_1 = 5.0\ \text{kg}\cdot\text{m/s}$, has position vector $\vec{r}_1$ and will pass 2.0 m from point O. Particle 2, with momentum magnitude $p_2 = 2.0\ \text{kg}\cdot\text{m/s}$, has position vector $\vec{r}_2$ and will pass 4.0 m from point O. What are the magnitude and direction of the net angular momentum $\vec{L}$ about point O of the two-particle system?



Figure 11-13 Two particles pass near point O.

KEY IDEA

To find $\vec{L}$, we can first find the individual angular momenta $\vec{\ell}_1$ and $\vec{\ell}_2$ and then add them. To evaluate their magnitudes, we can use any one of Eqs. 11-18 through 11-21. However, Eq. 11-21 is easiest, because we are given the perpendicular distances $r_{\perp 1}$ (= 2.0 m) and $r_{\perp 2}$ (= 4.0 m) and the momentum magnitudes p_1 and p_2.

Calculations: For particle 1, Eq. 11-21 yields

$$\begin{aligned}\ell_1 &= r_{\perp 1}p_1 = (2.0\ \text{m})(5.0\ \text{kg}\cdot\text{m/s}) \\ &= 10\ \text{kg}\cdot\text{m}^2/\text{s}.\end{aligned}$$

To find the direction of vector $\vec{\ell}_1$, we use Eq. 11-18 and the right-hand rule for vector products. For $\vec{r}_1 \times \vec{p}_1$, the vector product is out of the page, perpendicular to the plane of Fig. 11-13. This is the positive direction, consistent with the counterclockwise rotation of the particle's position vector $\vec{r}_1$ around O as particle 1 moves. Thus, the angular momentum vector for particle 1 is

$$\ell_1 = +10\ \text{kg}\cdot\text{m}^2/\text{s}.$$

Similarly, the magnitude of $\vec{\ell}_2$ is

$$\begin{aligned}\ell_2 &= r_{\perp 2}p_2 = (4.0\ \text{m})(2.0\ \text{kg}\cdot\text{m/s}) \\ &= 8.0\ \text{kg}\cdot\text{m}^2/\text{s},\end{aligned}$$

and the vector product $\vec{r}_2 \times \vec{p}_2$ is into the page, which is the negative direction, consistent with the clockwise rotation of $\vec{r}_2$ around O as particle 2 moves. Thus, the angular momentum vector for particle 2 is

$$\ell_2 = -8.0\ \text{kg}\cdot\text{m}^2/\text{s}.$$

The net angular momentum for the two-particle system is

$$\begin{aligned}L &= \ell_1 + \ell_2 = +10\ \text{kg}\cdot\text{m}^2/\text{s} + (-8.0\ \text{kg}\cdot\text{m}^2/\text{s}) \\ &= +2.0\ \text{kg}\cdot\text{m}^2/\text{s}. \qquad \text{(Answer)}\end{aligned}$$

The plus sign means that the system's net angular momentum about point O is out of the page.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

IPR2024-01137
CamelBak EX 2023
Page 76 of 96

11-6 NEWTON'S SECOND LAW IN ANGULAR FORM

Learning Objective

After reading this module, you should be able to . . .

11.21 Apply Newton's second law in angular form to relate the torque acting on a particle to the resulting rate of change of the particle's angular momentum, all relative to a specified point.

Key Idea

- Newton's second law for a particle can be written in angular form as

$$\vec{\tau}_{net} = \frac{d\vec{\ell}}{dt},$$

where $\vec{\tau}_{net}$ is the net torque acting on the particle and $\vec{\ell}$ is the angular momentum of the particle.

Newton's Second Law in Angular Form

Newton's second law written in the form

$$\vec{F}_{net} = \frac{d\vec{p}}{dt} \quad \text{(single particle)} \tag{11-22}$$

expresses the close relation between force and linear momentum for a single particle. We have seen enough of the parallelism between linear and angular quantities to be pretty sure that there is also a close relation between torque and angular momentum. Guided by Eq. 11-22, we can even guess that it must be

$$\vec{\tau}_{net} = \frac{d\vec{\ell}}{dt} \quad \text{(single particle).} \tag{11-23}$$

Equation 11-23 is indeed an angular form of Newton's second law for a single particle:

The (vector) sum of all the torques acting on a particle is equal to the time rate of change of the angular momentum of that particle.

Equation 11-23 has no meaning unless the torques $\vec{\tau}$ and the angular momentum $\vec{\ell}$ are defined with respect to the same point, usually the origin of the coordinate system being used.

Proof of Equation 11-23

We start with Eq. 11-18, the definition of the angular momentum of a particle:

$$\vec{\ell} = m(\vec{r} \times \vec{v}),$$

where $\vec{r}$ is the position vector of the particle and $\vec{v}$ is the velocity of the particle. Differentiating* each side with respect to time t yields

$$\frac{d\vec{\ell}}{dt} = m\left(\vec{r} \times \frac{d\vec{v}}{dt} + \frac{d\vec{r}}{dt} \times \vec{v}\right). \tag{11-24}$$

However, $d\vec{v}/dt$ is the acceleration $\vec{a}$ of the particle, and $d\vec{r}/dt$ is its velocity $\vec{v}$. Thus, we can rewrite Eq. 11-24 as

$$\frac{d\vec{\ell}}{dt} = m(\vec{r} \times \vec{a} + \vec{v} \times \vec{v}).$$

*In differentiating a vector product, be sure not to change the order of the two quantities (here $\vec{r}$ and $\vec{v}$) that form that product. (See Eq. 3-25.)

IPR2024-01137
CamelBak EX 2023
Page 77 of 96

Now $\vec{v} \times \vec{v} = 0$ (the vector product of any vector with itself is zero because the angle between the two vectors is necessarily zero). Thus, the last term of this expression is eliminated and we then have

$$\frac{d\vec{\ell}}{dt} = m(\vec{r} \times \vec{a}) = \vec{r} \times m\vec{a}.$$

We now use Newton's second law ($\vec{F}_{net} = m\vec{a}$) to replace $m\vec{a}$ with its equal, the vector sum of the forces that act on the particle, obtaining

$$\frac{d\vec{\ell}}{dt} = \vec{r} \times \vec{F}_{net} = \sum(\vec{r} \times \vec{F}). \tag{11-25}$$

Here the symbol Σ indicates that we must sum the vector products $\vec{r} \times \vec{F}$ for all the forces. However, from Eq. 11-14, we know that each one of those vector products is the torque associated with one of the forces. Therefore, Eq. 11-25 tells us that

$$\vec{\tau}_{net} = \frac{d\vec{\ell}}{dt}.$$

This is Eq. 11-23, the relation that we set out to prove.

Checkpoint 5

The figure shows the position vector $\vec{r}$ of a particle at a certain instant, and four choices for the direction of a force that is to accelerate the particle. All four choices lie in the xy plane. (a) Rank the choices according to the magnitude of the time rate of change ($d\vec{\ell}/dt$) they produce in the angular momentum of the particle about point O, greatest first. (b) Which choice results in a negative rate of change about O?

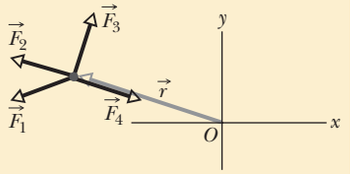

Sample Problem 11.04 Torque and the time derivative of angular momentum

Figure 11-14*a* shows a freeze-frame of a 0.500 kg particle moving along a straight line with a position vector given by

$$\vec{r} = (-2.00t^2 - t)\hat{i} + 5.00\hat{j},$$

with $\vec{r}$ in meters and t in seconds, starting at $t = 0$. The position vector points from the origin to the particle. In unit-vector notation, find expressions for the angular momentum $\vec{\ell}$ of the particle and the torque $\vec{\tau}$ acting on the particle, both with respect to (or about) the origin. Justify their algebraic signs in terms of the particle's motion.

KEY IDEAS

(1) The point about which an angular momentum of a particle is to be calculated must always be specified. Here it is the origin. (2) The angular momentum $\vec{\ell}$ of a particle is given by Eq. 11-18 ($\vec{\ell} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v})$). (3) The sign associated with a particle's angular momentum is set by the sense of rotation of the particle's position vector (around the rotation axis) as the particle moves: clockwise is negative and counterclockwise is positive. (4) If the torque acting on a particle and the angular momentum of the particle are calculated around the *same* point, then the torque is related to angular momentum by Eq. 11-23 ($\vec{\tau} = d\vec{\ell}/dt$).

Calculations: In order to use Eq. 11-18 to find the angular momentum about the origin, we first must find an expression for the particle's velocity by taking a time derivative of its position vector. Following Eq. 4-10 ($\vec{v} = d\vec{r}/dt$), we write

$$\vec{v} = \frac{d}{dt}((-2.00t^2 - t)\hat{i} + 5.00\hat{j})$$

$$= (-4.00t - 1.00)\hat{i},$$

with $\vec{v}$ in meters per second.

Next, let's take the cross product of $\vec{r}$ and $\vec{v}$ using the template for cross products displayed in Eq. 3-27:

$$\vec{a} \times \vec{b} = (a_y b_z - b_y a_z)\hat{i} + (a_z b_x - b_z a_x)\hat{j} + (a_x b_y - b_x a_y)\hat{k}.$$

Here the generic $\vec{a}$ is $\vec{r}$ and the generic $\vec{b}$ is $\vec{v}$. However, because we really don't want to do more work than needed, let's first just think about our substitutions into

IPR2024-01137
CamelBak EX 2023
Page 78 of 96

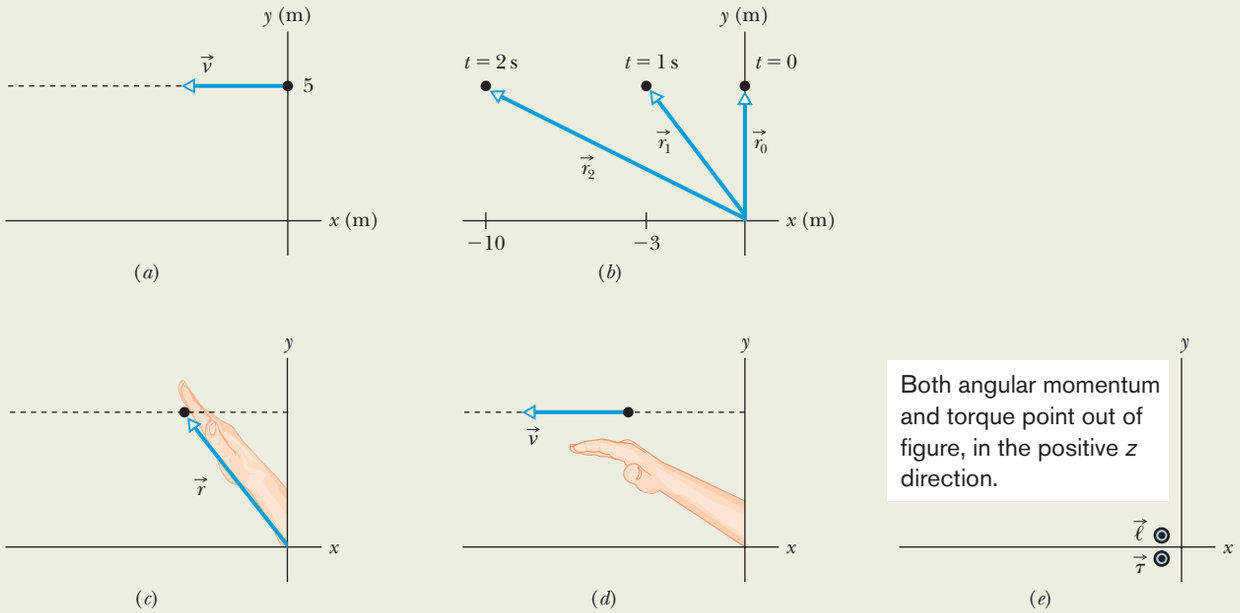

Figure 11-14 (*a*) A particle moving in a straight line, shown at time $t = 0$. (*b*) The position vector at $t = 0$, 1.00 s, and 2.00 s. (*c*) The first step in applying the right-hand rule for cross products. (*d*) The second step. (*e*) The angular momentum vector and the torque vector are along the *z* axis, which extends out of the plane of the figure.

the generic cross product. Because $\vec{r}$ lacks any *z* component and because $\vec{v}$ lacks any *y* or *z* component, the only nonzero term in the generic cross product is the very last one $(-b_x a_y)\hat{k}$. So, let's cut to the (mathematical) chase by writing

$$\vec{r} \times \vec{v} = -(-4.00t - 1.00)(5.00)\hat{k} = (20.0t + 5.00)\hat{k}\ \text{m}^2/\text{s}.$$

Note that, as always, the cross product produces a vector that is perpendicular to the original vectors.

To finish up Eq. 11-18, we multiply by the mass, finding

$$\begin{aligned}\vec{\ell} &= (0.500\ \text{kg})[(20.0t + 5.00)\hat{k}\ \text{m}^2/\text{s}] \\ &= (10.0t + 2.50)\hat{k}\ \text{kg}\cdot\text{m}^2/\text{s}. \qquad \text{(Answer)}\end{aligned}$$

The torque about the origin then immediately follows from Eq. 11-23:

$$\begin{aligned}\vec{\tau} &= \frac{d}{dt}(10.0t + 2.50)\hat{k}\ \text{kg}\cdot\text{m}^2/\text{s} \\ &= 10.0\hat{k}\ \text{kg}\cdot\text{m}^2/\text{s}^2 = 10.0\hat{k}\ \text{N}\cdot\text{m}, \quad \text{(Answer)}\end{aligned}$$

which is in the positive direction of the *z* axis.

Our result for $\vec{\ell}$ tells us that the angular momentum is in the positive direction of the *z* axis. To make sense of that positive result in terms of the rotation of the position vector, let's evaluate that vector for several times:

$$\begin{aligned} t = 0, &\qquad \vec{r}_0 = 5.00\hat{j}\ \text{m} \\ t = 1.00\ \text{s}, &\qquad \vec{r}_1 = -3.00\hat{i} + 5.00\hat{j}\ \text{m} \\ t = 2.00\ \text{s}, &\qquad \vec{r}_2 = -10.0\hat{i} + 5.00\hat{j}\ \text{m}\end{aligned}$$

By drawing these results as in Fig. 11-14*b*, we see that $\vec{r}$ rotates counterclockwise in order to keep up with the particle. That is the positive direction of rotation. Thus, even though the particle is moving in a straight line, it is still moving counterclockwise around the origin and thus has a positive angular momentum.

We can also make sense of the direction of $\vec{\ell}$ by applying the right-hand rule for cross products (here $\vec{r} \times \vec{v}$, or, if you like, $m\vec{r} \times \vec{v}$, which gives the same direction). For any moment during the particle's motion, the fingers of the right hand are first extended in the direction of the first vector in the cross product ($\vec{r}$) as indicated in Fig. 11-14*c*. The orientation of the hand (on the page or viewing screen) is then adjusted so that the fingers can be comfortably rotated about the palm to be in the direction of the second vector in the cross product ($\vec{v}$) as indicated in Fig. 11-14*d*. The outstretched thumb then points in the direction of the result of the cross product. As indicated in Fig. 11-14*e*, the vector is in the positive direction of the *z* axis (which is directly out of the plane of the figure), consistent with our previous result. Figure 11-14*e* also indicates the direction of $\vec{\tau}$, which is also in the positive direction of the *z* axis because the angular momentum is in that direction and is increasing in magnitude.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

IPR2024-01137
CamelBak EX 2023
Page 79 of 96

11-7 ANGULAR MOMENTUM OF A RIGID BODY

Learning Objectives

After reading this module, you should be able to . . .

11.22 For a system of particles, apply Newton's second law in angular form to relate the net torque acting on the system to the rate of the resulting change in the system's angular momentum.

11.23 Apply the relationship between the angular momentum of a rigid body rotating around a fixed axis and the body's rotational inertia and angular speed around that axis.

11.24 If two rigid bodies rotate about the same axis, calculate their total angular momentum.

Key Ideas

- The angular momentum $\vec{L}$ of a system of particles is the vector sum of the angular momenta of the individual particles:

$$\vec{L} = \vec{\ell}_1 + \vec{\ell}_2 + \cdots + \vec{\ell}_n = \sum_{i=1}^{n} \vec{\ell}_i.$$

- The time rate of change of this angular momentum is equal to the net external torque on the system (the vector sum of the torques due to interactions of the particles of the system with particles external to the system):

$$\vec{\tau}_{\text{net}} = \frac{d\vec{L}}{dt} \quad \text{(system of particles)}.$$

- For a rigid body rotating about a fixed axis, the component of its angular momentum parallel to the rotation axis is

$$L = I\omega \quad \text{(rigid body, fixed axis)}.$$

The Angular Momentum of a System of Particles

Now we turn our attention to the angular momentum of a system of particles with respect to an origin. The total angular momentum $\vec{L}$ of the system is the (vector) sum of the angular momenta $\vec{\ell}$ of the individual particles (here with label i):

$$\vec{L} = \vec{\ell}_1 + \vec{\ell}_2 + \vec{\ell}_3 + \cdots + \vec{\ell}_n = \sum_{i=1}^{n} \vec{\ell}_i. \tag{11-26}$$

With time, the angular momenta of individual particles may change because of interactions between the particles or with the outside. We can find the resulting change in $\vec{L}$ by taking the time derivative of Eq. 11-26. Thus,

$$\frac{d\vec{L}}{dt} = \sum_{i=1}^{n} \frac{d\vec{\ell}_i}{dt}. \tag{11-27}$$

From Eq. 11-23, we see that $d\vec{\ell}_i/dt$ is equal to the net torque $\vec{\tau}_{\text{net},i}$ on the ith particle. We can rewrite Eq. 11-27 as

$$\frac{d\vec{L}}{dt} = \sum_{i=1}^{n} \vec{\tau}_{\text{net},i}. \tag{11-28}$$

That is, the rate of change of the system's angular momentum $\vec{L}$ is equal to the vector sum of the torques on its individual particles. Those torques include *internal torques* (due to forces between the particles) and *external torques* (due to forces on the particles from bodies external to the system). However, the forces between the particles always come in third-law force pairs so their torques sum to zero. Thus, the only torques that can change the total angular momentum $\vec{L}$ of the system are the external torques acting on the system.

Net External Torque. Let $\vec{\tau}_{\text{net}}$ represent the net external torque, the vector sum of all external torques on all particles in the system. Then we can write Eq. 11-28 as

$$\vec{\tau}_{\text{net}} = \frac{d\vec{L}}{dt} \quad \text{(system of particles)}, \tag{11-29}$$

IPR2024-01137
CamelBak EX 2023
Page 80 of 96

which is Newton's second law in angular form. It says:

> The net external torque $\vec{\tau}_{net}$ acting on a system of particles is equal to the time rate of change of the system's total angular momentum $\vec{L}$.

Equation 11-29 is analogous to $\vec{F}_{net} = d\vec{P}/dt$ (Eq. 9-27) but requires extra caution: Torques and the system's angular momentum must be measured relative to the same origin. If the center of mass of the system is not accelerating relative to an inertial frame, that origin can be any point. However, if it *is* accelerating, then it *must* be the origin. For example, consider a wheel as the system of particles. If it is rotating about an axis that is fixed relative to the ground, then the origin for applying Eq. 11-29 can be any point that is stationary relative to the ground. However, if it is rotating about an axis that is accelerating (such as when it rolls down a ramp), then the origin can be only at its center of mass.

The Angular Momentum of a Rigid Body Rotating About a Fixed Axis

We next evaluate the angular momentum of a system of particles that form a rigid body that rotates about a fixed axis. Figure 11-15*a* shows such a body. The fixed axis of rotation is a z axis, and the body rotates about it with constant angular speed ω. We wish to find the angular momentum of the body about that axis.

We can find the angular momentum by summing the z components of the angular momenta of the mass elements in the body. In Fig. 11-15*a*, a typical mass element, of mass Δm_i, moves around the z axis in a circular path. The position of the mass element is located relative to the origin O by position vector $\vec{r}_i$. The radius of the mass element's circular path is $r_{\perp i}$, the perpendicular distance between the element and the z axis.

The magnitude of the angular momentum $\vec{\ell}_i$ of this mass element, with respect to O, is given by Eq. 11-19:

$$\ell_i = (r_i)(p_i)(\sin 90°) = (r_i)(\Delta m_i\, v_i),$$

where p_i and v_i are the linear momentum and linear speed of the mass element, and 90° is the angle between $\vec{r}_i$ and $\vec{p}_i$. The angular momentum vector $\vec{\ell}_i$ for the mass element in Fig. 11-15*a* is shown in Fig. 11-15*b*; its direction must be perpendicular to those of $\vec{r}_i$ and $\vec{p}_i$.

The z Components. We are interested in the component of $\vec{\ell}_i$ that is parallel to the rotation axis, here the z axis. That z component is

$$\ell_{iz} = \ell_i \sin\theta = (r_i \sin\theta)(\Delta m_i\, v_i) = r_{\perp i}\, \Delta m_i\, v_i.$$

The z component of the angular momentum for the rotating rigid body as a whole is found by adding up the contributions of all the mass elements that make up the body. Thus, because $v = \omega r_\perp$, we may write

$$L_z = \sum_{i=1}^{n} \ell_{iz} = \sum_{i=1}^{n} \Delta m_i\, v_i r_{\perp i} = \sum_{i=1}^{n} \Delta m_i (\omega r_{\perp i}) r_{\perp i}$$

$$= \omega \left(\sum_{i=1}^{n} \Delta m_i\, r_{\perp i}^2 \right). \qquad (11\text{-}30)$$

We can remove ω from the summation here because it has the same value for all points of the rotating rigid body.

The quantity $\Sigma \Delta m_i\, r_{\perp i}^2$ in Eq. 11-30 is the rotational inertia I of the body about the fixed axis (see Eq. 10-33). Thus Eq. 11-30 reduces to

$$L = I\omega \quad \text{(rigid body, fixed axis)}. \qquad (11\text{-}31)$$

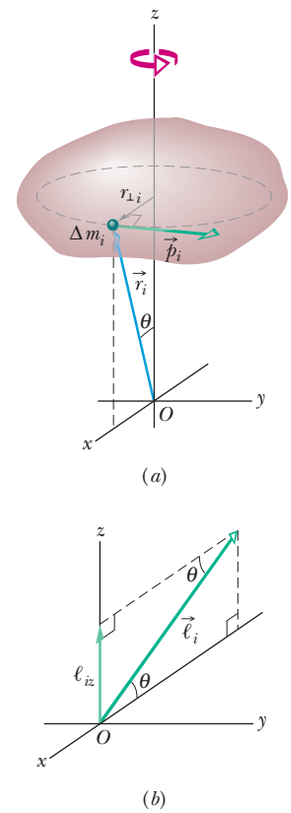

Figure 11-15 (*a*) A rigid body rotates about a z axis with angular speed ω. A mass element of mass Δm_i within the body moves about the z axis in a circle with radius $r_{\perp i}$. The mass element has linear momentum $\vec{p}_i$, and it is located relative to the origin O by position vector $\vec{r}_i$. Here the mass element is shown when $r_{\perp i}$ is parallel to the x axis. (*b*) The angular momentum $\vec{\ell}_i$, with respect to O, of the mass element in (*a*). The z component ℓ_{iz} is also shown.

IPR2024-01137
CamelBak EX 2023
Page 81 of 96

Table 11-1 More Corresponding Variables and Relations for Translational and Rotational Motion[a]

Translational		Rotational	
Force	$\vec{F}$	Torque	$\vec{\tau}\ (=\vec{r}\times\vec{F})$
Linear momentum	$\vec{p}$	Angular momentum	$\vec{\ell}\ (=\vec{r}\times\vec{p})$
Linear momentum[b]	$\vec{P}\ (=\Sigma\vec{p}_i)$	Angular momentum[b]	$\vec{L}\ (=\Sigma\vec{\ell}_i)$
Linear momentum[b]	$\vec{P}=M\vec{v}_{com}$	Angular momentum[c]	$L=I\omega$
Newton's second law[b]	$\vec{F}_{net}=\frac{d\vec{P}}{dt}$	Newton's second law[b]	$\vec{\tau}_{net}=\frac{d\vec{L}}{dt}$
Conservation law[d]	$\vec{P}=$ a constant	Conservation law[d]	$\vec{L}=$ a constant

[a]See also Table 10-3.
[b]For systems of particles, including rigid bodies.
[c]For a rigid body about a fixed axis, with L being the component along that axis.
[d]For a closed, isolated system.

We have dropped the subscript z, but you must remember that the angular momentum defined by Eq. 11-31 is the angular momentum about the rotation axis. Also, I in that equation is the rotational inertia about that same axis.

Table 11-1, which supplements Table 10-3, extends our list of corresponding linear and angular relations.

Checkpoint 6

In the figure, a disk, a hoop, and a solid sphere are made to spin about fixed central axes (like a top) by means of strings wrapped around them, with the strings producing the same constant tangential force $\vec{F}$ on all three objects. The three objects have the same mass and radius, and they are initially stationary. Rank the objects according to (a) their angular momentum about their central axes and (b) their angular speed, greatest first, when the strings have been pulled for a certain time t.



11-8 CONSERVATION OF ANGULAR MOMENTUM

Learning Objective

After reading this module, you should be able to . . .

11.25 When no external net torque acts on a system along a specified axis, apply the conservation of angular momentum to relate the initial angular momentum value along *that axis* to the value at a later instant.

Key Idea

- The angular momentum $\vec{L}$ of a system remains constant if the net external torque acting on the system is zero:

$$\vec{L}=\text{a constant} \quad \text{(isolated system)}$$

or

$$\vec{L}_i=\vec{L}_f \quad \text{(isolated system).}$$

This is the law of conservation of angular momentum.

Conservation of Angular Momentum

So far we have discussed two powerful conservation laws, the conservation of energy and the conservation of linear momentum. Now we meet a third law of this type, involving the conservation of angular momentum. We start from

IPR2024-01137
CamelBak EX 2023
Page 82 of 96

Eq. 11-29 ($\vec{\tau}_{net} = d\vec{L}/dt$), which is Newton's second law in angular form. If no net external torque acts on the system, this equation becomes $d\vec{L}/dt = 0$, or

$$\vec{L} = \text{a constant} \quad \text{(isolated system)}. \tag{11-32}$$

This result, called the **law of conservation of angular momentum,** can also be written as

$$\begin{pmatrix}\text{net angular momentum}\\ \text{at some initial time } t_i\end{pmatrix} = \begin{pmatrix}\text{net angular momentum}\\ \text{at some later time } t_f\end{pmatrix},$$

or

$$\vec{L}_i = \vec{L}_f \quad \text{(isolated system)}. \tag{11-33}$$

Equations 11-32 and 11-33 tell us:

If the net external torque acting on a system is zero, the angular momentum $\vec{L}$ of the system remains constant, no matter what changes take place within the system.

Equations 11-32 and 11-33 are vector equations; as such, they are equivalent to three component equations corresponding to the conservation of angular momentum in three mutually perpendicular directions. Depending on the torques acting on a system, the angular momentum of the system might be conserved in only one or two directions but not in all directions:

If the component of the net *external* torque on a system along a certain axis is zero, then the component of the angular momentum of the system along that axis cannot change, no matter what changes take place within the system.

This is a powerful statement: In this situation we are concerned with only the initial and final states of the system; we do not need to consider any intermediate state.

We can apply this law to the isolated body in Fig. 11-15, which rotates around the z axis. Suppose that the initially rigid body somehow redistributes its mass relative to that rotation axis, changing its rotational inertia about that axis. Equations 11-32 and 11-33 state that the angular momentum of the body cannot change. Substituting Eq. 11-31 (for the angular momentum along the rotational axis) into Eq. 11-33, we write this conservation law as

$$I_i\omega_i = I_f\omega_f. \tag{11-34}$$

Here the subscripts refer to the values of the rotational inertia I and angular speed ω before and after the redistribution of mass.

Like the other two conservation laws that we have discussed, Eqs. 11-32 and 11-33 hold beyond the limitations of Newtonian mechanics. They hold for particles whose speeds approach that of light (where the theory of special relativity reigns), and they remain true in the world of subatomic particles (where quantum physics reigns). No exceptions to the law of conservation of angular momentum have ever been found.

We now discuss four examples involving this law.

1. ***The spinning volunteer*** Figure 11-16 shows a student seated on a stool that can rotate freely about a vertical axis. The student, who has been set into rotation at a modest initial angular speed ω_i, holds two dumbbells in his outstretched hands. His angular momentum vector $\vec{L}$ lies along the vertical rotation axis, pointing upward.

The instructor now asks the student to pull in his arms; this action reduces his rotational inertia from its initial value I_i to a smaller value I_f because he moves mass closer to the rotation axis. His rate of rotation increases markedly,

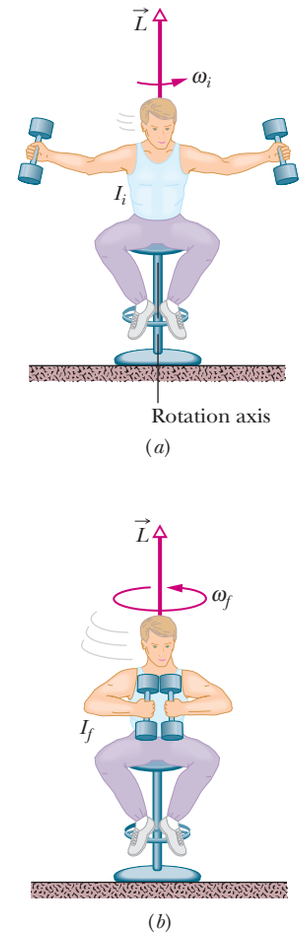

Figure 11-16 (*a*) The student has a relatively large rotational inertia about the rotation axis and a relatively small angular speed. (*b*) By decreasing his rotational inertia, the student automatically increases his angular speed. The angular momentum $\vec{L}$ of the rotating system remains unchanged.

IPR2024-01137
CamelBak EX 2023
Page 83 of 96

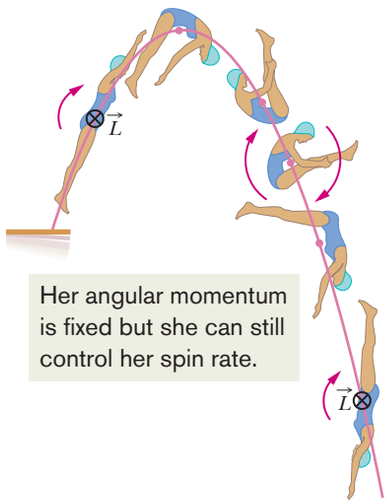

Figure 11-17 The diver's angular momentum $\vec{L}$ is constant throughout the dive, being represented by the tail ⊗ of an arrow that is perpendicular to the plane of the figure. Note also that her center of mass (see the dots) follows a parabolic path.

from ω_i to ω_f. The student can then slow down by extending his arms once more, moving the dumbbells outward.

No net external torque acts on the system consisting of the student, stool, and dumbbells. Thus, the angular momentum of that system about the rotation axis must remain constant, no matter how the student maneuvers the dumbbells. In Fig. 11-16*a*, the student's angular speed ω_i is relatively low and his rotational inertia I_i is relatively high. According to Eq. 11-34, his angular speed in Fig. 11-16*b* must be greater to compensate for the decreased I_f.

2. ***The springboard diver*** Figure 11-17 shows a diver doing a forward one-and-a-half-somersault dive. As you should expect, her center of mass follows a parabolic path. She leaves the springboard with a definite angular momentum $\vec{L}$ about an axis through her center of mass, represented by a vector pointing into the plane of Fig. 11-17, perpendicular to the page. When she is in the air, no net external torque acts on her about her center of mass, so her angular momentum about her center of mass cannot change. By pulling her arms and legs into the closed *tuck position,* she can considerably reduce her rotational inertia about the same axis and thus, according to Eq. 11-34, considerably increase her angular speed. Pulling out of the tuck position (into the *open layout position*) at the end of the dive increases her rotational inertia and thus slows her rotation rate so she can enter the water with little splash. Even in a more complicated dive involving both twisting and somersaulting, the angular momentum of the diver must be conserved, in both magnitude *and* direction, throughout the dive.

3. ***Long jump*** When an athlete takes off from the ground in a running long jump, the forces on the launching foot give the athlete an angular momentum with a forward rotation around a horizontal axis. Such rotation would not allow the jumper to land properly: In the landing, the legs should be together and extended forward at an angle so that the heels mark the sand at the greatest distance. Once airborne, the angular momentum cannot change (it is conserved) because no external torque acts to change it. However, the jumper can shift most of the angular momentum to the arms by rotating them in windmill fashion (Fig. 11-18). Then the body remains upright and in the proper orientation for landing.

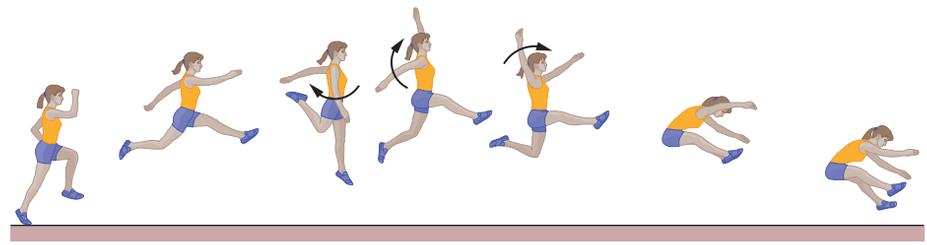

Figure 11-18 Windmill motion of the arms during a long jump helps maintain body orientation for a proper landing.

4. ***Tour jeté*** In a tour jeté, a ballet performer leaps with a small twisting motion on the floor with one foot while holding the other leg perpendicular to the body (Fig. 11-19*a*). The angular speed is so small that it may not be perceptible

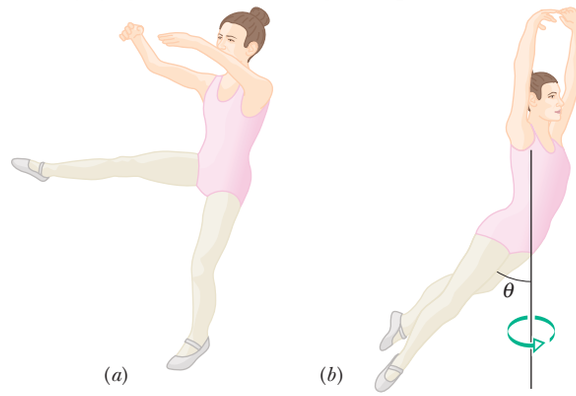

Figure 11-19 (*a*) Initial phase of a tour jeté: large rotational inertia and small angular speed. (*b*) Later phase: smaller rotational inertia and larger angular speed.

IPR2024-01137
CamelBak EX 2023
Page 84 of 96

to the audience. As the performer ascends, the outstretched leg is brought down and the other leg is brought up, with both ending up at angle θ to the body (Fig. 11-19*b*). The motion is graceful, but it also serves to increase the rotation because bringing in the initially outstretched leg decreases the performer's rotational inertia. Since no external torque acts on the airborne performer, the angular momentum cannot change. Thus, with a decrease in rotational inertia, the angular speed must increase. When the jump is well executed, the performer seems to suddenly begin to spin and rotates 180° before the initial leg orientations are reversed in preparation for the landing. Once a leg is again outstretched, the rotation seems to vanish.

Checkpoint 7

A rhinoceros beetle rides the rim of a small disk that rotates like a merry-go-round. If the beetle crawls toward the center of the disk, do the following (each relative to the central axis) increase, decrease, or remain the same for the beetle–disk system: (a) rotational inertia, (b) angular momentum, and (c) angular speed?

Sample Problem 11.05 Conservation of angular momentum, rotating wheel demo

Figure 11-20*a* shows a student, again sitting on a stool that can rotate freely about a vertical axis. The student, initially at rest, is holding a bicycle wheel whose rim is loaded with lead and whose rotational inertia I_{wh} about its central axis is 1.2 kg·m^2. (The rim contains lead in order to make the value of I_{wh} substantial.)

The wheel is rotating at an angular speed ω_{wh} of 3.9 rev/s; as seen from overhead, the rotation is counterclockwise. The axis of the wheel is vertical, and the angular momentum $\vec{L}_{wh}$ of the wheel points vertically upward.

The student now inverts the wheel (Fig. 11-20*b*) so that, as seen from overhead, it is rotating clockwise. Its angular momentum is now $-\vec{L}_{wh}$. The inversion results in the student, the stool, and the wheel's center rotating together as a composite rigid body about the stool's rotation axis, with rotational inertia $I_b = 6.8$ kg·m^2. (The fact that the wheel is also rotating about its center does not affect the mass distribution of this composite body; thus, I_b has the same value whether or not the wheel rotates.) With what angular speed ω_b and in what direction does the composite body rotate after the inversion of the wheel?

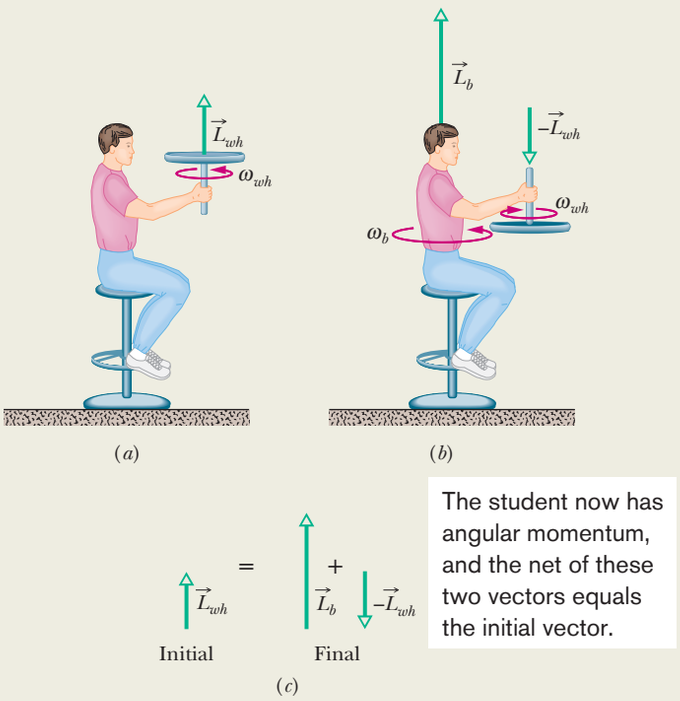

Figure 11-20 (*a*) A student holds a bicycle wheel rotating around a vertical axis. (*b*) The student inverts the wheel, setting himself into rotation. (*c*) The net angular momentum of the system must remain the same in spite of the inversion.

KEY IDEAS

1. The angular speed ω_b we seek is related to the final angular momentum $\vec{L}_b$ of the composite body about the stool's rotation axis by Eq. 11-31 ($L = I\omega$).
2. The initial angular speed ω_{wh} of the wheel is related to the angular momentum $\vec{L}_{wh}$ of the wheel's rotation about its center by the same equation.
3. The vector addition of $\vec{L}_b$ and $\vec{L}_{wh}$ gives the total angular momentum $\vec{L}_{tot}$ of the system of the student, stool, and wheel.
4. As the wheel is inverted, no net *external* torque acts on that system to change $\vec{L}_{tot}$ about any vertical axis. (Torques due to forces between the student and the wheel as the student inverts the wheel are *internal* to the system.) So, the system's total angular momentum is conserved about any vertical axis, including the rotation axis through the stool.

IPR2024-01137
CamelBak EX 2023
Page 85 of 96

Calculations: The conservation of $\vec{L}_{tot}$ is represented with vectors in Fig. 11-20*c*. We can also write this conservation in terms of components along a vertical axis as

$$L_{b,f} + L_{wh,f} = L_{b,i} + L_{wh,i}, \tag{11-35}$$

where *i* and *f* refer to the initial state (before inversion of the wheel) and the final state (after inversion). Because inversion of the wheel inverted the angular momentum vector of the wheel's rotation, we substitute $-L_{wh,i}$ for $L_{wh,f}$. Then, if we set $L_{b,i} = 0$ (because the student, the stool, and the wheel's center were initially at rest), Eq. 11-35 yields

$$L_{b,f} = 2L_{wh,i}.$$

Using Eq. 11-31, we next substitute $I_b\omega_b$ for $L_{b,f}$ and $I_{wh}\omega_{wh}$ for $L_{wh,i}$ and solve for ω_b, finding

$$\omega_b = \frac{2I_{wh}}{I_b}\omega_{wh}$$

$$= \frac{(2)(1.2\ \text{kg}\cdot\text{m}^2)(3.9\ \text{rev/s})}{6.8\ \text{kg}\cdot\text{m}^2} = 1.4\ \text{rev/s}. \quad \text{(Answer)}$$

This positive result tells us that the student rotates counterclockwise about the stool axis as seen from overhead. If the student wishes to stop rotating, he has only to invert the wheel once more.

Sample Problem 11.06 Conservation of angular momentum, cockroach on disk

In Fig. 11-21, a cockroach with mass *m* rides on a disk of mass 6.00*m* and radius *R*. The disk rotates like a merry-go-round around its central axis at angular speed $\omega_i = 1.50$ rad/s. The cockroach is initially at radius $r = 0.800R$, but then it crawls out to the rim of the disk. Treat the cockroach as a particle. What then is the angular speed?

KEY IDEAS

(1) The cockroach's crawl changes the mass distribution (and thus the rotational inertia) of the cockroach–disk system. (2) The angular momentum of the system does not change because there is no external torque to change it. (The forces and torques due to the cockroach's crawl are internal to the system.) (3) The magnitude of the angular momentum of a rigid body or a particle is given by Eq. 11-31 ($L = I\omega$).

Calculations: We want to find the final angular speed. Our key is to equate the final angular momentum L_f to the initial angular momentum L_i, because both involve angular speed. They also involve rotational inertia *I*. So, let's start by finding the rotational inertia of the system of cockroach and disk before and after the crawl.



Figure 11-21 A cockroach rides at radius *r* on a disk rotating like a merry-go-round.

The rotational inertia of a disk rotating about its central axis is given by Table 10-2*c* as $\frac{1}{2}MR^2$. Substituting 6.00*m* for the mass *M*, our disk here has rotational inertia

$$I_d = 3.00mR^2. \tag{11-36}$$

(We don't have values for *m* and *R*, but we shall continue with physics courage.)

From Eq. 10-33, we know that the rotational inertia of the cockroach (a particle) is equal to mr^2. Substituting the cockroach's initial radius ($r = 0.800R$) and final radius ($r = R$), we find that its initial rotational inertia about the rotation axis is

$$I_{ci} = 0.64mR^2 \tag{11-37}$$

and its final rotational inertia about the rotation axis is

$$I_{cf} = mR^2. \tag{11-38}$$

So, the cockroach–disk system initially has the rotational inertia

$$I_i = I_d + I_{ci} = 3.64mR^2, \tag{11-39}$$

and finally has the rotational inertia

$$I_f = I_d + I_{cf} = 4.00mR^2. \tag{11-40}$$

Next, we use Eq. 11-31 ($L = I\omega$) to write the fact that the system's final angular momentum L_f is equal to the system's initial angular momentum L_i:

$$I_f\omega_f = I_i\omega_i$$

or $$4.00mR^2\omega_f = 3.64mR^2(1.50\ \text{rad/s}).$$

After canceling the unknowns *m* and *R*, we come to

$$\omega_f = 1.37\ \text{rad/s}. \quad \text{(Answer)}$$

Note that ω decreased because part of the mass moved outward, thus increasing that system's rotational inertia.

WILEY PLUS Additional examples, video, and practice available at *WileyPLUS*

IPR2024-01137
CamelBak EX 2023
Page 86 of 96

11-9 PRECESSION OF A GYROSCOPE

Learning Objectives

After reading this module, you should be able to . . .

11.26 Identify that the gravitational force acting on a spinning gyroscope causes the spin angular momentum vector (and thus the gyroscope) to rotate about the vertical axis in a motion called precession.

11.27 Calculate the precession rate of a gyroscope.

11.28 Identify that a gyroscope's precession rate is independent of the gyroscope's mass.

Key Idea

- A spinning gyroscope can precess about a vertical axis through its support at the rate

$$\Omega = \frac{Mgr}{I\omega},$$

where M is the gyroscope's mass, r is the moment arm, I is the rotational inertia, and ω is the spin rate.

Precession of a Gyroscope

A simple gyroscope consists of a wheel fixed to a shaft and free to spin about the axis of the shaft. If one end of the shaft of a *nonspinning* gyroscope is placed on a support as in Fig. 11-22*a* and the gyroscope is released, the gyroscope falls by rotating downward about the tip of the support. Since the fall involves rotation, it is governed by Newton's second law in angular form, which is given by Eq. 11-29:

$$\vec{\tau} = \frac{d\vec{L}}{dt}. \tag{11-41}$$

This equation tells us that the torque causing the downward rotation (the fall) changes the angular momentum $\vec{L}$ of the gyroscope from its initial value of zero. The torque $\vec{\tau}$ is due to the gravitational force $M\vec{g}$ acting at the gyroscope's center of mass, which we take to be at the center of the wheel. The moment arm relative to the support tip, located at O in Fig. 11-22*a*, is $\vec{r}$. The magnitude of $\vec{\tau}$ is

$$\tau = Mgr \sin 90° = Mgr \tag{11-42}$$

(because the angle between $M\vec{g}$ and $\vec{r}$ is 90°), and its direction is as shown in Fig. 11-22*a*.

A rapidly spinning gyroscope behaves differently. Assume it is released with the shaft angled slightly upward. It first rotates slightly downward but then, while it is still spinning about its shaft, it begins to rotate horizontally about a vertical axis through support point O in a motion called **precession.**

Why Not Just Fall Over? Why does the spinning gyroscope stay aloft instead of falling over like the nonspinning gyroscope? The clue is that when the spinning gyroscope is released, the torque due to $M\vec{g}$ must change not an initial angular momentum of zero but rather some already existing nonzero angular momentum due to the spin.

To see how this nonzero initial angular momentum leads to precession, we first consider the angular momentum $\vec{L}$ of the gyroscope due to its spin. To simplify the situation, we assume the spin rate is so rapid that the angular momentum due to precession is negligible relative to $\vec{L}$. We also assume the shaft is horizontal when precession begins, as in Fig. 11-22*b*. The magnitude of $\vec{L}$ is given by Eq. 11-31:

$$L = I\omega, \tag{11-43}$$

where I is the rotational moment of the gyroscope about its shaft and ω is the angular speed at which the wheel spins about the shaft. The vector $\vec{L}$ points along the shaft, as in Fig. 11-22*b*. Since $\vec{L}$ is parallel to $\vec{r}$, torque $\vec{\tau}$ must be perpendicular to $\vec{L}$.

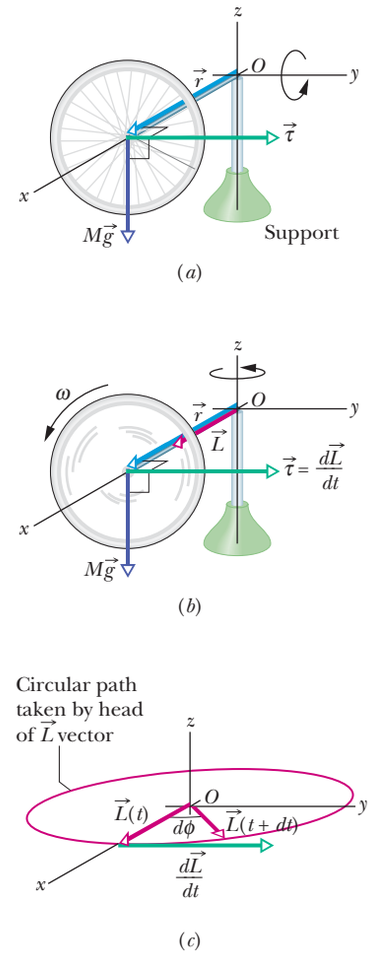

Figure 11-22 (*a*) A nonspinning gyroscope falls by rotating in an xz plane because of torque $\vec{\tau}$. (*b*) A rapidly spinning gyroscope, with angular momentum $\vec{L}$, precesses around the z axis. Its precessional motion is in the xy plane. (*c*) The change $d\vec{L}/dt$ in angular momentum leads to a rotation of $\vec{L}$ about O.

IPR2024-01137
CamelBak EX 2023
Page 87 of 96

According to Eq. 11-41, torque $\vec{\tau}$ causes an incremental change $d\vec{L}$ in the angular momentum of the gyroscope in an incremental time interval dt; that is,

$$d\vec{L} = \vec{\tau}\,dt. \tag{11-44}$$

However, for a *rapidly spinning* gyroscope, the magnitude of $\vec{L}$ is fixed by Eq. 11-43. Thus the torque can change only the direction of $\vec{L}$, not its magnitude.

From Eq. 11-44 we see that the direction of $d\vec{L}$ is in the direction of $\vec{\tau}$, perpendicular to $\vec{L}$. The only way that $\vec{L}$ can be changed in the direction of $\vec{\tau}$ without the magnitude L being changed is for $\vec{L}$ to rotate around the z axis as shown in Fig. 11-22*c*. $\vec{L}$ maintains its magnitude, the head of the $\vec{L}$ vector follows a circular path, and $\vec{\tau}$ is always tangent to that path. Since $\vec{L}$ must always point along the shaft, the shaft must rotate about the z axis in the direction of $\vec{\tau}$. Thus we have precession. Because the spinning gyroscope must obey Newton's law in angular form in response to any change in its initial angular momentum, it must precess instead of merely toppling over.

Precession. We can find the **precession rate** Ω by first using Eqs. 11-44 and 11-42 to get the magnitude of $d\vec{L}$:

$$dL = \tau\,dt = Mgr\,dt. \tag{11-45}$$

As $\vec{L}$ changes by an incremental amount in an incremental time interval dt, the shaft and $\vec{L}$ precess around the z axis through incremental angle $d\phi$. (In Fig. 11-22*c*, angle $d\phi$ is exaggerated for clarity.) With the aid of Eqs. 11-43 and 11-45, we find that $d\phi$ is given by

$$d\phi = \frac{dL}{L} = \frac{Mgr\,dt}{I\omega}.$$

Dividing this expression by dt and setting the rate $\Omega = d\phi/dt$, we obtain

$$\Omega = \frac{Mgr}{I\omega} \quad \text{(precession rate)}. \tag{11-46}$$

This result is valid under the assumption that the spin rate ω is rapid. Note that Ω decreases as ω is increased. Note also that there would be no precession if the gravitational force $M\vec{g}$ did not act on the gyroscope, but because I is a function of M, mass cancels from Eq. 11-46; thus Ω is independent of the mass.

Equation 11-46 also applies if the shaft of a spinning gyroscope is at an angle to the horizontal. It holds as well for a spinning top, which is essentially a spinning gyroscope at an angle to the horizontal.

Review & Summary

Rolling Bodies For a wheel of radius R rolling smoothly,

$$v_{com} = \omega R, \tag{11-2}$$

where v_{com} is the linear speed of the wheel's center of mass and ω is the angular speed of the wheel about its center. The wheel may also be viewed as rotating instantaneously about the point P of the "road" that is in contact with the wheel. The angular speed of the wheel about this point is the same as the angular speed of the wheel about its center. The rolling wheel has kinetic energy

$$K = \tfrac{1}{2}I_{com}\omega^2 + \tfrac{1}{2}Mv_{com}^2, \tag{11-5}$$

where I_{com} is the rotational inertia of the wheel about its center of mass and M is the mass of the wheel. If the wheel is being accelerated but is still rolling smoothly, the acceleration of the center of mass $\vec{a}_{com}$ is related to the angular acceleration α about the center with

$$a_{com} = \alpha R. \tag{11-6}$$

If the wheel rolls smoothly down a ramp of angle θ, its acceleration along an x axis extending up the ramp is

$$a_{com,x} = -\frac{g\sin\theta}{1 + I_{com}/MR^2}. \tag{11-10}$$

Torque as a Vector In three dimensions, *torque* $\vec{\tau}$ is a vector quantity defined relative to a fixed point (usually an origin); it is

$$\vec{\tau} = \vec{r} \times \vec{F}, \tag{11-14}$$

where $\vec{F}$ is a force applied to a particle and $\vec{r}$ is a position vector locating the particle relative to the fixed point. The magnitude of $\vec{\tau}$ is

$$\tau = rF\sin\phi = rF_\perp = r_\perp F, \tag{11-15, 11-16, 11-17}$$

where ϕ is the angle between $\vec{F}$ and $\vec{r}$, $F_\perp$ is the component of $\vec{F}$ perpendicular to $\vec{r}$, and $r_\perp$ is the moment arm of $\vec{F}$. The direction of $\vec{\tau}$ is given by the right-hand rule.

IPR2024-01137
CamelBak EX 2023
Page 88 of 96

Angular Momentum of a Particle The *angular momentum* $\vec{\ell}$ of a particle with linear momentum $\vec{p}$, mass m, and linear velocity $\vec{v}$ is a vector quantity defined relative to a fixed point (usually an origin) as

$$\vec{\ell} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v}). \tag{11-18}$$

The magnitude of $\vec{\ell}$ is given by

$$\ell = rmv \sin \phi \tag{11-19}$$

$$= rp_\perp = rmv_\perp \tag{11-20}$$

$$= r_\perp p = r_\perp mv, \tag{11-21}$$

where ϕ is the angle between $\vec{r}$ and $\vec{p}$, $p_\perp$ and $v_\perp$ are the components of $\vec{p}$ and $\vec{v}$ perpendicular to $\vec{r}$, and $r_\perp$ is the perpendicular distance between the fixed point and the extension of $\vec{p}$. The direction of $\vec{\ell}$ is given by the right-hand rule for cross products.

Newton's Second Law in Angular Form Newton's second law for a particle can be written in angular form as

$$\vec{\tau}_{\text{net}} = \frac{d\vec{\ell}}{dt}, \tag{11-23}$$

where $\vec{\tau}_{\text{net}}$ is the net torque acting on the particle and $\vec{\ell}$ is the angular momentum of the particle.

Angular Momentum of a System of Particles The angular momentum $\vec{L}$ of a system of particles is the vector sum of the angular momenta of the individual particles:

$$\vec{L} = \vec{\ell}_1 + \vec{\ell}_2 + \cdots + \vec{\ell}_n = \sum_{i=1}^{n} \vec{\ell}_i. \tag{11-26}$$

The time rate of change of this angular momentum is equal to the net external torque on the system (the vector sum of the torques due to interactions with particles external to the system):

$$\vec{\tau}_{\text{net}} = \frac{d\vec{L}}{dt} \quad \text{(system of particles)}. \tag{11-29}$$

Angular Momentum of a Rigid Body For a rigid body rotating about a fixed axis, the component of its angular momentum parallel to the rotation axis is

$$L = I\omega \quad \text{(rigid body, fixed axis)}. \tag{11-31}$$

Conservation of Angular Momentum The angular momentum $\vec{L}$ of a system remains constant if the net external torque acting on the system is zero:

$$\vec{L} = \text{a constant} \quad \text{(isolated system)} \tag{11-32}$$

or

$$\vec{L}_i = \vec{L}_f \quad \text{(isolated system)}. \tag{11-33}$$

This is the **law of conservation of angular momentum.**

Precession of a Gyroscope A spinning gyroscope can precess about a vertical axis through its support at the rate

$$\Omega = \frac{Mgr}{I\omega}, \tag{11-46}$$

where M is the gyroscope's mass, r is the moment arm, I is the rotational inertia, and ω is the spin rate.

Questions

1 Figure 11-23 shows three particles of the same mass and the same constant speed moving as indicated by the velocity vectors. Points a, b, c, and d form a square, with point e at the center. Rank the points according to the magnitude of the net angular momentum of the three-particle system when measured about the points, greatest first.



Figure 11-23 Question 1.

2 Figure 11-24 shows two particles A and B at xyz coordinates (1 m, 1 m, 0) and (1 m, 0, 1 m). Acting on each particle are three numbered forces, all of the same magnitude and each directed parallel to an axis. (a) Which of the forces produce a torque about the origin that is directed parallel to y? (b) Rank the forces according to the magnitudes of the torques they produce on the particles about the origin, greatest first.



Figure 11-24 Question 2.

3 What happens to the initially stationary yo-yo in Fig. 11-25 if you pull it via its string with (a) force $\vec{F}_2$ (the line of action passes through the point of contact on the table, as indicated), (b) force $\vec{F}_1$ (the line of action passes above the point of contact), and (c) force $\vec{F}_3$ (the line of action passes to the right of the point of contact)?



Figure 11-25 Question 3.

4 The position vector $\vec{r}$ of a particle relative to a certain point has a magnitude of 3 m, and the force $\vec{F}$ on the particle has a magnitude of 4 N. What is the angle between the directions of $\vec{r}$ and $\vec{F}$ if the magnitude of the associated torque equals (a) zero and (b) 12 N·m?

5 In Fig. 11-26, three forces of the same magnitude are applied to a particle at the origin ($\vec{F}_1$ acts directly into the plane of the figure). Rank the forces according to the magnitudes of the torques they create about (a) point P_1, (b) point P_2, and (c) point P_3, greatest first.



Figure 11-26 Question 5.

6 The angular momenta $\ell(t)$ of a particle in four situations are (1) $\ell = 3t + 4$; (2) $\ell = -6t^2$; (3) $\ell = 2$; (4) $\ell = 4/t$. In which situation is the net torque on the particle (a) zero, (b) positive and constant, (c) negative and increasing in magnitude ($t > 0$), and (d) negative and decreasing in magnitude ($t > 0$)?

7 A rhinoceros beetle rides the rim of a horizontal disk rotating counterclockwise like a merry-go-round. If the beetle then walks along the rim in the direction of the rotation, will the magnitudes of the following quantities (each measured about the rotation axis) increase, decrease, or remain the same (the disk is still rotating in the counterclockwise direction): (a) the angular momentum of the

IPR2024-01137
CamelBak EX 2023
Page 89 of 96

beetle–disk system, (b) the angular momentum and angular velocity of the beetle, and (c) the angular momentum and angular velocity of the disk? (d) What are your answers if the beetle walks in the direction opposite the rotation?

8 Figure 11-27 shows an overhead view of a rectangular slab that can spin like a merry-go-round about its center at O. Also shown are seven paths along which wads of bubble gum can be thrown (all with the same speed and mass) to stick onto the stationary slab. (a) Rank the paths according to the angular speed that the slab (and gum) will have after the gum sticks, greatest first. (b) For which paths will the angular momentum of the slab (and gum) about O be negative from the view of Fig. 11-27?



Figure 11-27 Question 8.

9 Figure 11-28 gives the angular momentum magnitude L of a wheel versus time t. Rank the four lettered time intervals according to the magnitude of the torque acting on the wheel, greatest first.



Figure 11-28 Question 9.

10 Figure 11-29 shows a particle moving at constant velocity $\vec{v}$ and five points with their xy coordinates. Rank the points according to the magnitude of the angular momentum of the particle measured about them, greatest first.

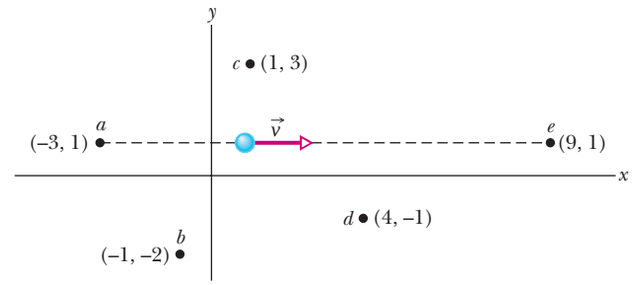

Figure 11-29 Question 10.

11 A cannonball and a marble roll smoothly from rest down an incline. Is the cannonball's (a) time to the bottom and (b) translational kinetic energy at the bottom more than, less than, or the same as the marble's?

12 A solid brass cylinder and a solid wood cylinder have the same radius and mass (the wood cylinder is longer). Released together from rest, they roll down an incline. (a) Which cylinder reaches the bottom first, or do they tie? (b) The wood cylinder is then shortened to match the length of the brass cylinder, and the brass cylinder is drilled out along its long (central) axis to match the mass of the wood cylinder. Which cylinder now wins the race, or do they tie?

Problems

GO Tutoring problem available (at instructor's discretion) in *WileyPLUS* and WebAssign
SSM Worked-out solution available in Student Solutions Manual
WWW Worked-out solution is at http://www.wiley.com/college/halliday
• – ••• Number of dots indicates level of problem difficulty
ILW Interactive solution is at
Additional information available in *The Flying Circus of Physics* and at flyingcircusofphysics.com

Module 11-1 Rolling as Translation and Rotation Combined

•1 A car travels at 80 km/h on a level road in the positive direction of an x axis. Each tire has a diameter of 66 cm. Relative to a woman riding in the car and in unit-vector notation, what are the velocity $\vec{v}$ at the (a) center, (b) top, and (c) bottom of the tire and the magnitude a of the acceleration at the (d) center, (e) top, and (f) bottom of each tire? Relative to a hitchhiker sitting next to the road and in unit-vector notation, what are the velocity $\vec{v}$ at the (g) center, (h) top, and (i) bottom of the tire and the magnitude a of the acceleration at the (j) center, (k) top, and (l) bottom of each tire?

•2 An automobile traveling at 80.0 km/h has tires of 75.0 cm diameter. (a) What is the angular speed of the tires about their axles? (b) If the car is brought to a stop uniformly in 30.0 complete turns of the tires (without skidding), what is the magnitude of the angular acceleration of the wheels? (c) How far does the car move during the braking?

Module 11-2 Forces and Kinetic Energy of Rolling

•3 SSM A 140 kg hoop rolls along a horizontal floor so that the hoop's center of mass has a speed of 0.150 m/s. How much work must be done on the hoop to stop it?

•4 A uniform solid sphere rolls down an incline. (a) What must be the incline angle if the linear acceleration of the center of the sphere is to have a magnitude of $0.10g$? (b) If a frictionless block were to slide down the incline at that angle, would its acceleration magnitude be more than, less than, or equal to $0.10g$? Why?

•5 ILW A 1000 kg car has four 10 kg wheels. When the car is moving, what fraction of its total kinetic energy is due to rotation of the wheels about their axles? Assume that the wheels are uniform disks of the same mass and size. Why do you not need to know the radius of the wheels?

••6 Figure 11-30 gives the speed v versus time t for a 0.500 kg object of radius 6.00 cm that rolls smoothly down a 30° ramp. The scale on the velocity axis is set by v_s = 4.0 m/s. What is the rotational inertia of the object?



Figure 11-30 Problem 6.

••7 ILW In Fig. 11-31, a solid cylinder of radius 10 cm and mass 12 kg starts from rest and rolls without slipping a distance L = 6.0 m down a roof that is inclined at angle θ = 30°. (a) What is the angular speed of the cylinder about its center as it leaves the roof? (b) The roof's edge is at height H = 5.0 m. How far horizontally from the roof's edge does the cylinder hit the level ground?



Figure 11-31 Problem 7.

IPR2024-01137
CamelBak EX 2023
Page 90 of 96

••8 Figure 11-32 shows the potential energy $U(x)$ of a solid ball that can roll along an x axis. The scale on the U axis is set by $U_s = 100$ J. The ball is uniform, rolls smoothly, and has a mass of 0.400 kg. It is released at $x = 7.0$ m headed in the negative direction of the x axis with a mechanical energy of 75 J. (a) If the ball can reach $x = 0$ m, what is its speed there, and if it cannot, what is its turning point? Suppose, instead, it is headed in the positive direction of the x axis when it is released at $x = 7.0$ m with 75 J. (b) If the ball can reach $x = 13$ m, what is its speed there, and if it cannot, what is its turning point?



Figure 11-32 Problem 8.

••9 In Fig. 11-33, a solid ball rolls smoothly from rest (starting at height $H = 6.0$ m) until it leaves the horizontal section at the end of the track, at height $h = 2.0$ m. How far horizontally from point A does the ball hit the floor?



Figure 11-33 Problem 9.

••10 A hollow sphere of radius 0.15 m, with rotational inertia $I = 0.040\ \text{kg}\cdot\text{m}^2$ about a line through its center of mass, rolls without slipping up a surface inclined at 30° to the horizontal. At a certain initial position, the sphere's total kinetic energy is 20 J. (a) How much of this initial kinetic energy is rotational? (b) What is the speed of the center of mass of the sphere at the initial position? When the sphere has moved 1.0 m up the incline from its initial position, what are (c) its total kinetic energy and (d) the speed of its center of mass?

••11 In Fig. 11-34, a constant horizontal force $\vec{F}_{app}$ of magnitude 10 N is applied to a wheel of mass 10 kg and radius 0.30 m. The wheel rolls smoothly on the horizontal surface, and the acceleration of its center of mass has magnitude 0.60 m/s^2. (a) In unit-vector notation, what is the frictional force on the wheel? (b) What is the rotational inertia of the wheel about the rotation axis through its center of mass?



Figure 11-34 Problem 11.

••12 In Fig. 11-35, a solid brass ball of mass 0.280 g will roll smoothly along a loop-the-loop track when released from rest along the straight section. The circular loop has radius $R = 14.0$ cm, and the ball has radius $r \ll R$. (a) What is h if the ball is on the verge of leaving the track when it reaches the top of the loop? If the ball is released at height $h = 6.00R$, what are the (b) magnitude and (c) direction of the horizontal force component acting on the ball at point Q?



Figure 11-35 Problem 12.



Figure 11-36 Problem 13.

••13 *Nonuniform ball.* In Fig. 11-36, a ball of mass M and radius R rolls smoothly from rest down a ramp and onto a circular loop of radius 0.48 m. The initial height of the ball is $h = 0.36$ m. At the loop bottom, the magnitude of the normal force on the ball is $2.00Mg$. The ball consists of an outer spherical shell (of a certain uniform density) that is glued to a central sphere (of a different uniform density). The rotational inertia of the ball can be expressed in the general form $I = \beta MR^2$, but β is not 0.4 as it is for a ball of uniform density. Determine β.

•••14 In Fig. 11-37, a small, solid, uniform ball is to be shot from point P so that it rolls smoothly along a horizontal path, up along a ramp, and onto a plateau. Then it leaves the plateau horizontally to land on a game board, at a horizontal distance d from the right edge of the plateau. The vertical heights are $h_1 = 5.00$ cm and $h_2 = 1.60$ cm. With what speed must the ball be shot at point P for it to land at $d = 6.00$ cm?

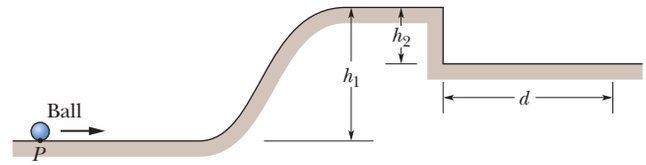

Figure 11-37 Problem 14.

•••15 A bowler throws a bowling ball of radius $R = 11$ cm along a lane. The ball (Fig. 11-38) slides on the lane with initial speed $v_{com,0} = 8.5$ m/s and initial angular speed $\omega_0 = 0$. The coefficient of kinetic friction between the ball and the lane is 0.21. The kinetic frictional force $\vec{f}_k$ acting on the ball causes a linear acceleration of the ball while producing a torque that causes an angular acceleration of the ball. When speed v_{com} has decreased enough and angular speed ω has increased enough, the ball stops sliding and then rolls smoothly. (a) What then is v_{com} in terms of ω? During the sliding, what are the ball's (b) linear acceleration and (c) angular acceleration? (d) How long does the ball slide? (e) How far does the ball slide? (f) What is the linear speed of the ball when smooth rolling begins?



Figure 11-38 Problem 15.

•••16 *Nonuniform cylindrical object.* In Fig. 11-39, a cylindrical object of mass M and radius R rolls smoothly from rest down a ramp and onto a horizontal section. From there it rolls off the ramp and onto the floor, landing a horizontal distance $d = 0.506$ m from the end of the ramp. The initial height of the object is $H = 0.90$ m; the end of the ramp is at height $h = 0.10$ m. The object consists of an outer cylindrical shell (of a certain uniform density) that is glued to a central cylinder (of a different uniform density). The rotational inertia of the object can be expressed in the general form $I = \beta MR^2$, but β is not 0.5 as it is for a cylinder of uniform density. Determine β.

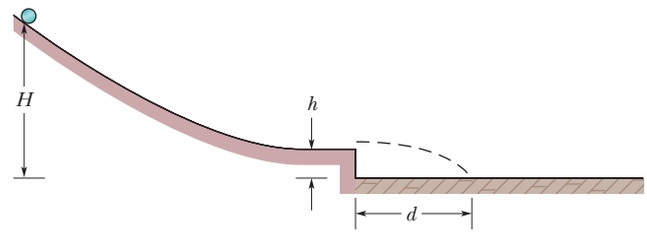

Figure 11-39 Problem 16.

IPR2024-01137
CamelBak EX 2023
Page 91 of 96

Module 11-3 The Yo-Yo

•17 SSM A yo-yo has a rotational inertia of 950 g·cm² and a mass of 120 g. Its axle radius is 3.2 mm, and its string is 120 cm long. The yo-yo rolls from rest down to the end of the string. (a) What is the magnitude of its linear acceleration? (b) How long does it take to reach the end of the string? As it reaches the end of the string, what are its (c) linear speed, (d) translational kinetic energy, (e) rotational kinetic energy, and (f) angular speed?

•18 In 1980, over San Francisco Bay, a large yo-yo was released from a crane. The 116 kg yo-yo consisted of two uniform disks of radius 32 cm connected by an axle of radius 3.2 cm. What was the magnitude of the acceleration of the yo-yo during (a) its fall and (b) its rise? (c) What was the tension in the cord on which it rolled? (d) Was that tension near the cord's limit of 52 kN? Suppose you build a scaled-up version of the yo-yo (same shape and materials but larger). (e) Will the magnitude of your yo-yo's acceleration as it falls be greater than, less than, or the same as that of the San Francisco yo-yo? (f) How about the tension in the cord?

Module 11-4 Torque Revisited

•19 In unit-vector notation, what is the net torque about the origin on a flea located at coordinates (0, −4.0 m, 5.0 m) when forces $\vec{F}_1 = (3.0\text{ N})\hat{k}$ and $\vec{F}_2 = (-2.0\text{ N})\hat{j}$ act on the flea?

•20 A plum is located at coordinates (−2.0 m, 0, 4.0 m). In unit-vector notation, what is the torque about the origin on the plum if that torque is due to a force $\vec{F}$ whose only component is (a) $F_x = 6.0$ N, (b) $F_x = -6.0$ N, (c) $F_z = 6.0$ N, and (d) $F_z = -6.0$ N?

•21 In unit-vector notation, what is the torque about the origin on a particle located at coordinates (0, −4.0 m, 3.0 m) if that torque is due to (a) force $\vec{F}_1$ with components $F_{1x} = 2.0$ N, $F_{1y} = F_{1z} = 0$, and (b) force $\vec{F}_2$ with components $F_{2x} = 0, F_{2y} = 2.0$ N, $F_{2z} = 4.0$ N?

••22 A particle moves through an xyz coordinate system while a force acts on the particle. When the particle has the position vector $\vec{r} = (2.00\text{ m})\hat{i} - (3.00\text{ m})\hat{j} + (2.00\text{ m})\hat{k}$, the force is given by $\vec{F} = F_x\hat{i} + (7.00\text{ N})\hat{j} - (6.00\text{ N})\hat{k}$ and the corresponding torque about the origin is $\vec{\tau} = (4.00\text{ N}\cdot\text{m})\hat{i} + (2.00\text{ N}\cdot\text{m})\hat{j} - (1.00\text{ N}\cdot\text{m})\hat{k}$. Determine F_x.

••23 Force $\vec{F} = (2.0\text{ N})\hat{i} - (3.0\text{ N})\hat{k}$ acts on a pebble with position vector $\vec{r} = (0.50\text{ m})\hat{j} - (2.0\text{ m})\hat{k}$ relative to the origin. In unit-vector notation, what is the resulting torque on the pebble about (a) the origin and (b) the point (2.0 m, 0, −3.0 m)?

••24 In unit-vector notation, what is the torque about the origin on a jar of jalapeño peppers located at coordinates (3.0 m, −2.0 m, 4.0 m) due to (a) force $\vec{F}_1 = (3.0\text{ N})\hat{i} - (4.0\text{ N})\hat{j} + (5.0\text{ N})\hat{k}$, (b) force $\vec{F}_2 = (-3.0\text{ N})\hat{i} - (4.0\text{ N})\hat{j} - (5.0\text{ N})\hat{k}$, and (c) the vector sum of $\vec{F}_1$ and $\vec{F}_2$? (d) Repeat part (c) for the torque about the point with coordinates (3.0 m, 2.0 m, 4.0 m).

••25 SSM Force $\vec{F} = (-8.0\text{ N})\hat{i} + (6.0\text{ N})\hat{j}$ acts on a particle with position vector $\vec{r} = (3.0\text{ m})\hat{i} + (4.0\text{ m})\hat{j}$. What are (a) the torque on the particle about the origin, in unit-vector notation, and (b) the angle between the directions of $\vec{r}$ and $\vec{F}$?

Module 11-5 Angular Momentum

•26 At the instant of Fig. 11-40, a 2.0 kg particle P has a position vector $\vec{r}$ of magnitude 3.0 m and angle $\theta_1 = 45°$ and a velocity vector $\vec{v}$ of magnitude 4.0 m/s and angle $\theta_2 = 30°$. Force $\vec{F}$, of magnitude 2.0 N and angle $\theta_3 = 30°$, acts on P. All three vectors lie in the xy plane. About the origin, what are the (a) magnitude and (b) direction of the angular momentum of P and the (c) magnitude and (d) direction of the torque acting on P?



Figure 11-40 Problem 26.

•27 SSM At one instant, force $\vec{F} = 4.0\hat{j}$ N acts on a 0.25 kg object that has position vector $\vec{r} = (2.0\hat{i} - 2.0\hat{k})$ m and velocity vector $\vec{v} = (-5.0\hat{i} + 5.0\hat{k})$ m/s. About the origin and in unit-vector notation, what are (a) the object's angular momentum and (b) the torque acting on the object?

•28 A 2.0 kg particle-like object moves in a plane with velocity components $v_x = 30$ m/s and $v_y = 60$ m/s as it passes through the point with (x, y) coordinates of (3.0, −4.0) m. Just then, in unit-vector notation, what is its angular momentum relative to (a) the origin and (b) the point located at (−2.0, −2.0) m?

•29 ILW In the instant of Fig. 11-41, two particles move in an xy plane. Particle P_1 has mass 6.5 kg and speed $v_1 = 2.2$ m/s, and it is at distance $d_1 = 1.5$ m from point O. Particle P_2 has mass 3.1 kg and speed $v_2 = 3.6$ m/s, and it is at distance $d_2 = 2.8$ m from point O. What are the (a) magnitude and (b) direction of the net angular momentum of the two particles about O?



Figure 11-41 Problem 29.

••30 At the instant the displacement of a 2.00 kg object relative to the origin is $\vec{d} = (2.00\text{ m})\hat{i} + (4.00\text{ m})\hat{j} - (3.00\text{ m})\hat{k}$, its velocity is $\vec{v} = -(6.00\text{ m/s})\hat{i} + (3.00\text{ m/s})\hat{j} + (3.00\text{ m/s})\hat{k}$ and it is subject to a force $\vec{F} = (6.00\text{ N})\hat{i} - (8.00\text{ N})\hat{j} + (4.00\text{ N})\hat{k}$. Find (a) the acceleration of the object, (b) the angular momentum of the object about the origin, (c) the torque about the origin acting on the object, and (d) the angle between the velocity of the object and the force acting on the object.

••31 In Fig. 11-42, a 0.400 kg ball is shot directly upward at initial speed 40.0 m/s. What is its angular momentum about P, 2.00 m horizontally from the launch point, when the ball is (a) at maximum height and (b) halfway back to the ground? What is the torque on the ball about P due to the gravitational force when the ball is (c) at maximum height and (d) halfway back to the ground?



Figure 11-42 Problem 31.

Module 11-6 Newton's Second Law in Angular Form

•32 A particle is acted on by two torques about the origin: $\vec{\tau}_1$ has a magnitude of 2.0 N·m and is directed in the positive direction of the x axis, and $\vec{\tau}_2$ has a magnitude of 4.0 N·m and is directed in the negative direction of the y axis. In unit-vector notation, find $d\vec{\ell}/dt$, where $\vec{\ell}$ is the angular momentum of the particle about the origin.

•33 SSM WWW ILW At time $t = 0$, a 3.0 kg particle with velocity $\vec{v} = (5.0\text{ m/s})\hat{i} - (6.0\text{ m/s})\hat{j}$ is at $x = 3.0$ m, $y = 8.0$ m. It is pulled by a 7.0 N force in the negative x direction. About the origin, what are (a) the particle's angular momentum, (b) the torque acting on the particle, and (c) the rate at which the angular momentum is changing?

•34 A particle is to move in an xy plane, clockwise around the origin as seen from the positive side of the z axis. In unit-vector notation, what torque acts on the particle if the magnitude of its angular momentum about the origin is (a) 4.0 kg·m²/s, (b) $4.0t^2$ kg·m²/s, (c) $4.0\sqrt{t}$ kg·m²/s, and (d) $4.0/t^2$ kg·m²/s?

IPR2024-01137
CamelBak EX 2023
Page 92 of 96

••35 At time t, the vector $\vec{r} = 4.0t^2\hat{i} - (2.0t + 6.0t^2)\hat{j}$ gives the position of a 3.0 kg particle relative to the origin of an xy coordinate system ($\vec{r}$ is in meters and t is in seconds). (a) Find an expression for the torque acting on the particle relative to the origin. (b) Is the magnitude of the particle's angular momentum relative to the origin increasing, decreasing, or unchanging?

Module 11-7 Angular Momentum of a Rigid Body

•36 Figure 11-43 shows three rotating, uniform disks that are coupled by belts. One belt runs around the rims of disks A and C. Another belt runs around a central hub on disk A and the rim of disk B. The belts move smoothly without slippage on the rims and hub. Disk A has radius R; its hub has radius $0.5000R$; disk B has radius $0.2500R$; and disk C has radius $2.000R$. Disks B and C have the same density (mass per unit volume) and thickness. What is the ratio of the magnitude of the angular momentum of disk C to that of disk B?

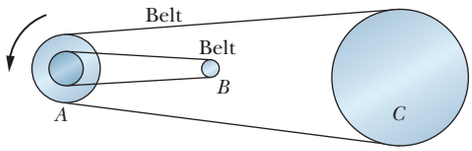

Figure 11-43 Problem 36.

•37 GO In Fig. 11-44, three particles of mass $m = 23$ g are fastened to three rods of length $d = 12$ cm and negligible mass. The rigid assembly rotates around point O at the angular speed $\omega = 0.85$ rad/s. About O, what are (a) the rotational inertia of the assembly, (b) the magnitude of the angular momentum of the middle particle, and (c) the magnitude of the angular momentum of the asssembly?



Figure 11-44 Problem 37.

•38 A sanding disk with rotational inertia 1.2×10^{-3} kg·m^2 is attached to an electric drill whose motor delivers a torque of magnitude 16 N·m about the central axis of the disk. About that axis and with the torque applied for 33 ms, what is the magnitude of the (a) angular momentum and (b) angular velocity of the disk?

•39 SSM The angular momentum of a flywheel having a rotational inertia of 0.140 kg · m^2 about its central axis decreases from 3.00 to 0.800 kg·m^2/s in 1.50 s. (a) What is the magnitude of the average torque acting on the flywheel about its central axis during this period? (b) Assuming a constant angular acceleration, through what angle does the flywheel turn? (c) How much work is done on the wheel? (d) What is the average power of the flywheel?

••40 A disk with a rotational inertia of 7.00 kg·m^2 rotates like a merry-go-round while undergoing a time-dependent torque given by $\tau = (5.00 + 2.00t)$ N·m. At time $t = 1.00$ s, its angular momentum is 5.00 kg·m^2/s. What is its angular momentum at $t = 3.00$ s?

••41 GO Figure 11-45 shows a rigid structure consisting of a circular hoop of radius R and mass m, and a square made of four thin bars, each of length R and mass m. The rigid structure rotates at a constant speed about a vertical axis, with a period of rotation of 2.5 s. Assuming $R = 0.50$ m and $m = 2.0$ kg, calculate (a) the structure's rotational inertia about the axis of rotation and (b) its angular momentum about that axis.



Figure 11-45 Problem 41.

••42 Figure 11-46 gives the torque τ that acts on an initially stationary disk that can rotate about its center like a merry-go-round. The scale on the τ axis is set by $\tau_s = 4.0$ N·m. What is the angular momentum of the disk about the rotation axis at times (a) $t = 7.0$ s and (b) $t = 20$ s?

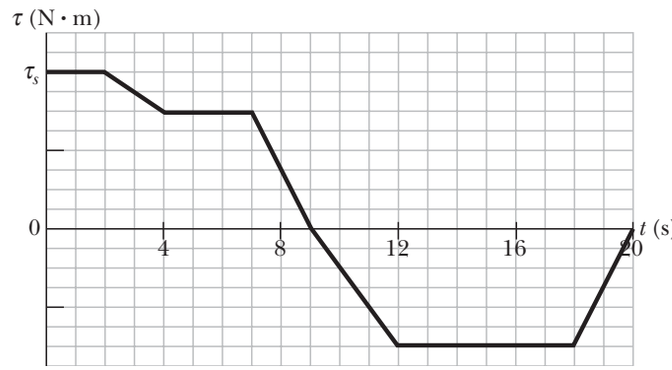

Figure 11-46 Problem 42.

Module 11-8 Conservation of Angular Momentum

•43 In Fig. 11-47, two skaters, each of mass 50 kg, approach each other along parallel paths separated by 3.0 m. They have opposite velocities of 1.4 m/s each. One skater carries one end of a long pole of negligible mass, and the other skater grabs the other end as she passes. The skaters then rotate around the center of the pole. Assume that the friction between skates and ice is negligible. What are (a) the radius of the circle, (b) the angular speed of the skaters, and (c) the kinetic energy of the two-skater system? Next, the skaters pull along the pole until they are separated by 1.0 m. What then are (d) their angular speed and (e) the kinetic energy of the system? (f) What provided the energy for the increased kinetic energy?



Figure 11-47 Problem 43.

•44 A Texas cockroach of mass 0.17 kg runs counterclockwise around the rim of a lazy Susan (a circular disk mounted on a vertical axle) that has radius 15 cm, rotational inertia 5.0×10^{-3} kg·m^2, and frictionless bearings. The cockroach's speed (relative to the ground) is 2.0 m/s, and the lazy Susan turns clockwise with angular speed $\omega_0 = 2.8$ rad/s. The cockroach finds a bread crumb on the rim and, of course, stops. (a) What is the angular speed of the lazy Susan after the cockroach stops? (b) Is mechanical energy conserved as it stops?

•45 SSM WWW A man stands on a platform that is rotating (without friction) with an angular speed of 1.2 rev/s; his arms are outstretched and he holds a brick in each hand. The rotational inertia of the system consisting of the man, bricks, and platform about the central vertical axis of the platform is 6.0 kg·m^2. If by moving the bricks the man decreases the rotational inertia of the system to 2.0 kg·m^2, what are (a) the resulting angular speed of the platform and (b) the ratio of the new kinetic energy of the system to the original kinetic energy? (c) What source provided the added kinetic energy?

•46 The rotational inertia of a collapsing spinning star drops to $\frac{1}{3}$ its initial value. What is the ratio of the new rotational kinetic energy to the initial rotational kinetic energy?

IPR2024-01137
CamelBak EX 2023
Page 93 of 96

•47 SSM A track is mounted on a large wheel that is free to turn with negligible friction about a vertical axis (Fig. 11-48). A toy train of mass m is placed on the track and, with the system initially at rest, the train's electrical power is turned on. The train reaches speed 0.15 m/s with respect to the track. What is the wheel's angular speed if its mass is $1.1m$ and its radius is 0.43 m? (Treat it as a hoop, and neglect the mass of the spokes and hub.)

Figure 11-48 Problem 47.

•48 A Texas cockroach walks from the center of a circular disk (that rotates like a merry-go-round without external torques) out to the edge at radius R. The angular speed of the cockroach–disk system for the walk is given in Fig. 11-49 ($\omega_a = 5.0$ rad/s and $\omega_b = 6.0$ rad/s). After reaching R, what fraction of the rotational inertia of the disk does the cockroach have?



Figure 11-49 Problem 48.

•49 Two disks are mounted (like a merry-go-round) on low-friction bearings on the same axle and can be brought together so that they couple and rotate as one unit. The first disk, with rotational inertia 3.30 kg · m^2 about its central axis, is set spinning counterclockwise at 450 rev/min. The second disk, with rotational inertia 6.60 kg · m^2 about its central axis, is set spinning counterclockwise at 900 rev/min. They then couple together. (a) What is their angular speed after coupling? If instead the second disk is set spinning clockwise at 900 rev/min, what are their (b) angular speed and (c) direction of rotation after they couple together?

•50 The rotor of an electric motor has rotational inertia $I_m = 2.0 \times 10^{-3}$ kg · m^2 about its central axis. The motor is used to change the orientation of the space probe in which it is mounted. The motor axis is mounted along the central axis of the probe; the probe has rotational inertia $I_p = 12$ kg · m^2 about this axis. Calculate the number of revolutions of the rotor required to turn the probe through 30° about its central axis.

•51 SSM ILW A wheel is rotating freely at angular speed 800 rev/min on a shaft whose rotational inertia is negligible. A second wheel, initially at rest and with twice the rotational inertia of the first, is suddenly coupled to the same shaft. (a) What is the angular speed of the resultant combination of the shaft and two wheels? (b) What fraction of the original rotational kinetic energy is lost?

••52 GO A cockroach of mass m lies on the rim of a uniform disk of mass $4.00m$ that can rotate freely about its center like a merry-go-round. Initially the cockroach and disk rotate together with an angular velocity of 0.260 rad/s. Then the cockroach walks halfway to the center of the disk. (a) What then is the angular velocity of the cockroach–disk system? (b) What is the ratio K/K_0 of the new kinetic energy of the system to its initial kinetic energy? (c) What accounts for the change in the kinetic energy?

••53 GO In Fig. 11-50 (an overhead view), a uniform thin rod of length 0.500 m and mass 4.00 kg can rotate in a horizontal plane about a vertical axis through its center. The rod is at rest when a 3.00 g bullet traveling in the rotation plane is fired into one end of the rod. In the view from above, the bullet's path makes angle $\theta = 60.0°$ with the rod (Fig. 11-50). If the bullet lodges in the rod and the angular velocity of the rod is 10 rad/s immediately after the collision, what is the bullet's speed just before impact?



Figure 11-50 Problem 53.

••54 GO Figure 11-51 shows an overhead view of a ring that can rotate about its center like a merry-go-round. Its outer radius R_2 is 0.800 m, its inner radius R_1 is $R_2/2.00$, its mass M is 8.00 kg, and the mass of the crossbars at its center is negligible. It initially rotates at an angular speed of 8.00 rad/s with a cat of mass $m = M/4.00$ on its outer edge, at radius R_2. By how much does the cat increase the kinetic energy of the cat–ring system if the cat crawls to the inner edge, at radius R_1?



Figure 11-51 Problem 54.

••55 A horizontal vinyl record of mass 0.10 kg and radius 0.10 m rotates freely about a vertical axis through its center with an angular speed of 4.7 rad/s and a rotational inertia of 5.0×10^{-4} kg · m^2. Putty of mass 0.020 kg drops vertically onto the record from above and sticks to the edge of the record. What is the angular speed of the record immediately afterwards?

••56 In a long jump, an athlete leaves the ground with an initial angular momentum that tends to rotate her body forward, threatening to ruin her landing. To counter this tendency, she rotates her outstretched arms to "take up" the angular momentum (Fig. 11-18). In 0.700 s, one arm sweeps through 0.500 rev and the other arm sweeps through 1.000 rev. Treat each arm as a thin rod of mass 4.0 kg and length 0.60 m, rotating around one end. In the athlete's reference frame, what is the magnitude of the total angular momentum of the arms around the common rotation axis through the shoulders?

••57 A uniform disk of mass $10m$ and radius $3.0r$ can rotate freely about its fixed center like a merry-go-round. A smaller uniform disk of mass m and radius r lies on top of the larger disk, concentric with it. Initially the two disks rotate together with an angular velocity of 20 rad/s. Then a slight disturbance causes the smaller disk to slide outward across the larger disk, until the outer edge of the smaller disk catches on the outer edge of the larger disk. Afterward, the two disks again rotate together (without further sliding). (a) What then is their angular velocity about the center of the larger disk? (b) What is the ratio K/K_0 of the new kinetic energy of the two-disk system to the system's initial kinetic energy?

••58 A horizontal platform in the shape of a circular disk rotates on a frictionless bearing about a vertical axle through the center of the disk. The platform has a mass of 150 kg, a radius of 2.0 m, and a rotational inertia of 300 kg · m^2 about the axis of rotation. A 60 kg student walks slowly from the rim of the platform toward the center. If the angular speed of the system is 1.5 rad/s when the student starts at the rim, what is the angular speed when she is 0.50 m from the center?

••59 Figure 11-52 is an overhead view of a thin uniform rod of length 0.800 m and mass M rotating horizontally at angular speed 20.0 rad/s about an axis through its center. A particle of mass $M/3.00$ initially attached to one end is ejected from the rod and travels along a path that is perpendicular to the rod at the instant of ejection. If the particle's speed v_p is 6.00 m/s greater than the speed of the rod end just after ejection, what is the value of v_p?



Figure 11-52 Problem 59.

IPR2024-01137
CamelBak EX 2023
Page 94 of 96

••60 In Fig. 11-53, a 1.0 g bullet is fired into a 0.50 kg block attached to the end of a 0.60 m nonuniform rod of mass 0.50 kg. The block–rod–bullet system then rotates in the plane of the figure, about a fixed axis at A. The rotational inertia of the rod alone about that axis at A is 0.060 kg·m^2. Treat the block as a particle. (a) What then is the rotational inertia of the block–rod–bullet system about point A? (b) If the angular speed of the system about A just after impact is 4.5 rad/s, what is the bullet's speed just before impact?



Figure 11-53 Problem 60.

••61 The uniform rod (length 0.60 m, mass 1.0 kg) in Fig. 11-54 rotates in the plane of the figure about an axis through one end, with a rotational inertia of 0.12 kg·m^2. As the rod swings through its lowest position, it collides with a 0.20 kg putty wad that sticks to the end of the rod. If the rod's angular speed just before collision is 2.4 rad/s, what is the angular speed of the rod–putty system immediately after collision?



Figure 11-54 Problem 61.

••62 During a jump to his partner, an aerialist is to make a quadruple somersault lasting a time $t = 1.87$ s. For the first and last quarter-revolution, he is in the extended orientation shown in Fig. 11-55, with rotational inertia $I_1 = 19.9$ kg·m^2 around his center of mass (the dot). During the rest of the flight he is in a tight tuck, with rotational inertia $I_2 = 3.93$ kg·m^2. What must be his angular speed ω_2 around his center of mass during the tuck?

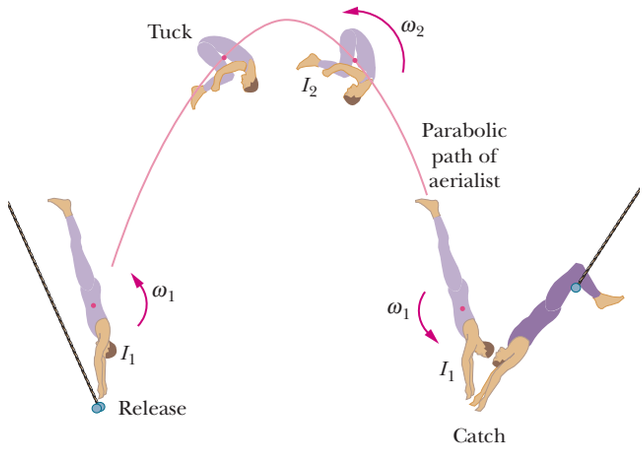

Figure 11-55 Problem 62.

••63 In Fig. 11-56, a 30 kg child stands on the edge of a stationary merry-go-round of radius 2.0 m. The rotational inertia of the merry-go-round about its rotation axis is 150 kg·m^2. The child catches a ball of mass 1.0 kg thrown by a friend. Just before the ball is caught, it has a horizontal velocity $\vec{v}$ of magnitude 12 m/s, at angle $\phi = 37°$ with a line tangent to the outer edge of the merry-go-round, as shown. What is the angular speed of the merry-go-round just after the ball is caught?



Figure 11-56 Problem 63.

••64 A ballerina begins a tour jeté (Fig. 11-19a) with angular speed ω_i and a rotational inertia consisting of two parts: $I_{leg} = 1.44$ kg·m^2 for her leg extended outward at angle $\theta = 90.0°$ to her body and $I_{trunk} = 0.660$ kg·m^2 for the rest of her body (primarily her trunk). Near her maximum height she holds both legs at angle $\theta = 30.0°$ to her body and has angular speed ω_f (Fig. 11-19b). Assuming that I_{trunk} has not changed, what is the ratio ω_f/ω_i?

••65 SSM WWW Two 2.00 kg balls are attached to the ends of a thin rod of length 50.0 cm and negligible mass. The rod is free to rotate in a vertical plane without friction about a horizontal axis through its center. With the rod initially horizontal (Fig. 11-57), a 50.0 g wad of wet putty drops onto one of the balls, hitting it with a speed of 3.00 m/s and then sticking to it. (a) What is the angular speed of the system just after the putty wad hits? (b) What is the ratio of the kinetic energy of the system after the collision to that of the putty wad just before? (c) Through what angle will the system rotate before it momentarily stops?



Figure 11-57 Problem 65.

••66 In Fig. 11-58, a small 50 g block slides down a frictionless surface through height $h = 20$ cm and then sticks to a uniform rod of mass 100 g and length 40 cm. The rod pivots about point O through angle θ before momentarily stopping. Find θ.



Figure 11-58 Problem 66.

••67 Figure 11-59 is an overhead view of a thin uniform rod of length 0.600 m and mass M rotating horizontally at 80.0 rad/s counterclockwise about an axis through its center. A particle of mass M/3.00 and traveling horizontally at speed 40.0 m/s hits the rod and sticks. The particle's path is perpendicular to the rod at the instant of the hit, at a distance d from the rod's center. (a) At what value of d are rod and particle stationary after the hit? (b) In which direction do rod and particle rotate if d is greater than this value?

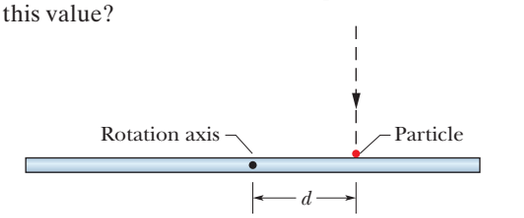

Figure 11-59 Problem 67.

Module 11-9 Precession of a Gyroscope

••68 A top spins at 30 rev/s about an axis that makes an angle of 30° with the vertical. The mass of the top is 0.50 kg, its rotational inertia about its central axis is 5.0×10^{-4} kg·m^2, and its center of mass is 4.0 cm from the pivot point. If the spin is clockwise from an overhead view, what are the (a) precession rate and (b) direction of the precession as viewed from overhead?

••69 A certain gyroscope consists of a uniform disk with a 50 cm radius mounted at the center of an axle that is 11 cm long and of negligible mass. The axle is horizontal and supported at one end. If the spin rate is 1000 rev/min, what is the precession rate?

IPR2024-01137
CamelBak EX 2023
Page 95 of 96

Additional Problems

70 A uniform solid ball rolls smoothly along a floor, then up a ramp inclined at 15.0°. It momentarily stops when it has rolled 1.50 m along the ramp. What was its initial speed?

71 SSM In Fig. 11-60, a constant horizontal force $\vec{F}_{app}$ of magnitude 12 N is applied to a uniform solid cylinder by fishing line wrapped around the cylinder. The mass of the cylinder is 10 kg, its radius is 0.10 m, and the cylinder rolls smoothly on the horizontal surface. (a) What is the magnitude of the acceleration of the center of mass of the cylinder? (b) What is the magnitude of the angular acceleration of the cylinder about the center of mass? (c) In unit-vector notation, what is the frictional force acting on the cylinder?



Figure 11-60 Problem 71.

72 A thin-walled pipe rolls along the floor. What is the ratio of its translational kinetic energy to its rotational kinetic energy about the central axis parallel to its length?

73 SSM A 3.0 kg toy car moves along an x axis with a velocity given by $\vec{v} = -2.0t^3\hat{i}$ m/s, with t in seconds. For $t > 0$, what are (a) the angular momentum $\vec{L}$ of the car and (b) the torque $\vec{\tau}$ on the car, both calculated about the origin? What are (c) $\vec{L}$ and (d) $\vec{\tau}$ about the point (2.0 m, 5.0 m, 0)? What are (e) $\vec{L}$ and (f) $\vec{\tau}$ about the point (2.0 m, −5.0 m, 0)?

74 A wheel rotates clockwise about its central axis with an angular momentum of 600 kg · m²/s. At time $t = 0$, a torque of magnitude 50 N · m is applied to the wheel to reverse the rotation. At what time t is the angular speed zero?

75 SSM In a playground, there is a small merry-go-round of radius 1.20 m and mass 180 kg. Its radius of gyration (see Problem 79 of Chapter 10) is 91.0 cm. A child of mass 44.0 kg runs at a speed of 3.00 m/s along a path that is tangent to the rim of the initially stationary merry-go-round and then jumps on. Neglect friction between the bearings and the shaft of the merry-go-round. Calculate (a) the rotational inertia of the merry-go-round about its axis of rotation, (b) the magnitude of the angular momentum of the running child about the axis of rotation of the merry-go-round, and (c) the angular speed of the merry-go-round and child after the child has jumped onto the merry-go-round.

76 A uniform block of granite in the shape of a book has face dimensions of 20 cm and 15 cm and a thickness of 1.2 cm. The density (mass per unit volume) of granite is 2.64 g/cm³. The block rotates around an axis that is perpendicular to its face and halfway between its center and a corner. Its angular momentum about that axis is 0.104 kg · m²/s. What is its rotational kinetic energy about that axis?

77 SSM Two particles, each of mass 2.90×10^{-4} kg and speed 5.46 m/s, travel in opposite directions along parallel lines separated by 4.20 cm. (a) What is the magnitude L of the angular momentum of the two-particle system around a point midway between the two lines? (b) Is the value different for a different location of the point? If the direction of either particle is reversed, what are the answers for (c) part (a) and (d) part (b)?

78 A wheel of radius 0.250 m, moving initially at 43.0 m/s, rolls to a stop in 225 m. Calculate the magnitudes of its (a) linear acceleration and (b) angular acceleration. (c) Its rotational inertia is 0.155 kg · m² about its central axis. Find the magnitude of the torque about the central axis due to friction on the wheel.

79 Wheels A and B in Fig. 11-61 are connected by a belt that does not slip. The radius of B is 3.00 times the radius of A. What would be the ratio of the rotational inertias I_A/I_B if the two wheels had (a) the same angular momentum about their central axes and (b) the same rotational kinetic energy?



Figure 11-61 Problem 79.

80 A 2.50 kg particle that is moving horizontally over a floor with velocity $(-3.00 \text{ m/s})\hat{j}$ undergoes a completely inelastic collision with a 4.00 kg particle that is moving horizontally over the floor with velocity $(4.50 \text{ m/s})\hat{i}$. The collision occurs at xy coordinates (−0.500 m, −0.100 m). After the collision and in unit-vector notation, what is the angular momentum of the stuck-together particles with respect to the origin?

81 SSM A uniform wheel of mass 10.0 kg and radius 0.400 m is mounted rigidly on a massless axle through its center (Fig. 11-62). The radius of the axle is 0.200 m, and the rotational inertia of the wheel–axle combination about its central axis is 0.600 kg · m². The wheel is initially at rest at the top of a surface that is inclined at angle $\theta = 30.0°$ with the horizontal; the axle rests on the surface while the wheel extends into a groove in the surface without touching the surface. Once released, the axle rolls down along the surface smoothly and without slipping. When the wheel–axle combination has moved down the surface by 2.00 m, what are (a) its rotational kinetic energy and (b) its translational kinetic energy?

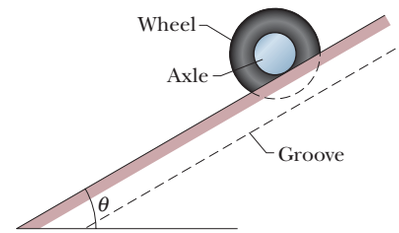

Figure 11-62 Problem 81.

82 A uniform rod rotates in a horizontal plane about a vertical axis through one end. The rod is 6.00 m long, weighs 10.0 N, and rotates at 240 rev/min. Calculate (a) its rotational inertia about the axis of rotation and (b) the magnitude of its angular momentum about that axis.

83 A solid sphere of weight 36.0 N rolls up an incline at an angle of 30.0°. At the bottom of the incline the center of mass of the sphere has a translational speed of 4.90 m/s. (a) What is the kinetic energy of the sphere at the bottom of the incline? (b) How far does the sphere travel up along the incline? (c) Does the answer to (b) depend on the sphere's mass?

84 Suppose that the yo-yo in Problem 17, instead of rolling from rest, is thrown so that its initial speed down the string is 1.3 m/s. (a) How long does the yo-yo take to reach the end of the string? As it reaches the end of the string, what are its (b) total kinetic energy, (c) linear speed, (d) translational kinetic energy, (e) angular speed, and (f) rotational kinetic energy?

85 A girl of mass M stands on the rim of a frictionless merry-go-round of radius R and rotational inertia I that is not moving. She throws a rock of mass m horizontally in a direction that is tangent to the outer edge of the merry-go-round. The speed of the rock, relative to the ground, is v. Afterward, what are (a) the angular speed of the merry-go-round and (b) the linear speed of the girl?

86 A body of radius R and mass m is rolling smoothly with speed v on a horizontal surface. It then rolls up a hill to a maximum height h. (a) If $h = 3v^2/4g$, what is the body's rotational inertia about the rotational axis through its center of mass? (b) What might the body be?

IPR2024-01137
CamelBak EX 2023
Page 96 of 96