



US011667203B2

(12) **United States Patent**
Nook et al.

(10) **Patent No.:** **US 11,667,203 B2**
(45) **Date of Patent:** ***Jun. 6, 2023**

(54) **PORTABLE VEHICLE BATTERY JUMP
START APPARATUS WITH SAFETY
PROTECTION**

(58) **Field of Classification Search**

CPC B60L 53/14; H02J 7/342; H02J 7/0047;
H02J 7/0034; H02J 7/0029; H02J 1/122;
(Continued)

(71) Applicant: **THE NOCO COMPANY**, Glenwillow,
OH (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,085,187 A 4/1963 Godshalk
3,105,183 A 9/1963 Hysler et al.
(Continued)

FOREIGN PATENT DOCUMENTS

AU 6997198 A 7/1998
AU 2015258229 A1 1/2016
(Continued)

OTHER PUBLICATIONS

P. R. Nicastrì and H. Huang, "Jump starting 42V powernet vehicles,"
Gateway to the New Millennium. 18th Digital Avionics Systems
Conference. Proceedings (Cat. No. 99CH37033), St. Louis, MO,
USA, 1999, pp. 8.A.6-8.A.6, doi: 10.1109/DASC.1999.822005.
(Year: 1999).*

(Continued)

Primary Examiner — M Baye Diao

(74) *Attorney, Agent, or Firm* — Jones Day

(72) Inventors: **Jonathan Lewis Nook**, Gates Mills,
OH (US); **William Knight Nook**,
Shaker Heights, OH (US); **James**
Richard Stanfield, Glendale, AZ (US);
Derek Michael Underhill, Tempe, AZ
(US)

(73) Assignee: **The NOCO Company**, Glenwillow,
OH (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 46 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **16/819,831**

(22) Filed: **Mar. 16, 2020**

(65) **Prior Publication Data**
US 2020/0317068 A1 Oct. 8, 2020

Related U.S. Application Data

(60) Continuation of application No. 15/691,884, filed on
Aug. 31, 2017, now Pat. No. 10,604,024, which is a
(Continued)


(51) **Int. Cl.**
B60L 53/14 (2019.01)
H02J 7/00 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **B60L 53/14** (2019.02); **H02J 1/122**
(2020.01); **H02J 7/0029** (2013.01);
(Continued)

(57) **ABSTRACT**

A handheld device for jump starting a vehicle engine
includes a rechargeable lithium ion battery pack (32) and a
microcontroller (1). The lithium ion battery is coupled to a
power output port of the device through a power switch
circuit (15) actuated by the microcontroller. A vehicle bat-
tery isolation sensor (12) connected in circuit with positive
and negative polarity outputs detects the presence of a
vehicle battery (72) connected between the positive and
negative polarity outputs. A reverse polarity sensor (10)
connected in circuit with the positive and negative polarity
outputs detects the polarity of a vehicle battery connected
between the positive and negative polarity outputs, such that

(Continued)

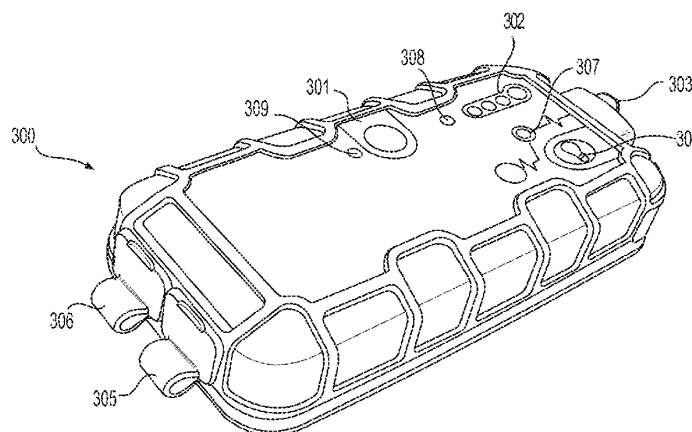

the microcontroller will enable power to be delivered from the lithium ion power pack to the output port only when a good battery is connected to the output port and only when the battery is connected with proper polarity of positive and negative terminals.

11 Claims, 13 Drawing Sheets

Related U.S. Application Data

continuation of application No. 14/619,655, filed on Feb. 11, 2015, now Pat. No. 9,770,992, which is a division of application No. 14/325,938, filed on Jul. 8, 2014, now Pat. No. 9,007,015, which is a continuation of application No. PCT/US2014/045434, filed on Jul. 3, 2014.

(51) **Int. Cl.**

H02J 7/34 (2006.01)

H02J 1/10 (2006.01)

(52) **U.S. Cl.**

CPC **H02J 7/0034** (2013.01); **H02J 7/0047** (2013.01); **H02J 7/342** (2020.01); **H02J 7/00** (2013.01); **H02J 7/0048** (2020.01); **H02J 7/00302** (2020.01); **H02J 7/00306** (2020.01); **H02J 7/00309** (2020.01); **H02J 2310/46** (2020.01)

(58) **Field of Classification Search**

CPC H02J 7/00; H02J 7/0048; H02J 7/00302; H02J 7/00309; H02J 7/00306; H02J 2310/46; Y02T 90/14; Y02T 10/7072; Y02T 10/70

USPC 320/105
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,267,452 A 8/1966 Wolf
3,590,357 A 6/1971 Reid
3,638,108 A 1/1972 Channing
3,933,140 A 1/1976 Gynn
4,041,445 A 8/1977 Carter
4,142,771 A 3/1979 Barnes
4,740,740 A 4/1988 Taranto et al.
4,885,524 A 12/1989 Wilburn
4,910,628 A 3/1990 Minagawa et al.
4,931,731 A 6/1990 Jenks
4,972,135 A 11/1990 Bates et al.
4,990,723 A 2/1991 Ziberna et al.
5,083,076 A 1/1992 Scott
5,111,130 A 5/1992 Bates
5,189,359 A 2/1993 Kronberg
5,194,799 A 3/1993 Tomantschger
5,281,904 A 1/1994 Tomkins
5,319,298 A * 6/1994 Wanzong H02J 7/02
320/158
5,486,434 A 1/1996 Aoyama
5,496,658 A 3/1996 Hein et al.
5,635,817 A 6/1997 Shiska
5,635,818 A 6/1997 Quintero
5,637,978 A 6/1997 Kellett
5,650,974 A 7/1997 Yoshimura
5,707,257 A 1/1998 Kotajima et al.
5,716,735 A 2/1998 Muffoletto et al.
5,793,185 A 8/1998 Prelec et al.
5,795,182 A 8/1998 Jacob
5,820,407 A 10/1998 Morse et al.
5,831,350 A 11/1998 McConkey et al.

5,867,007 A * 2/1999 Kim H02J 7/0024
320/118
5,921,809 A 7/1999 Fink
5,953,681 A 9/1999 Cantatore
5,965,998 A 10/1999 Whiting et al.
6,002,235 A 12/1999 Clore
6,054,779 A 4/2000 Zubko
6,057,667 A 5/2000 Mills
6,130,519 A 10/2000 Whiting et al.
6,140,796 A 10/2000 Martin et al.
6,144,110 A 11/2000 Matsuda et al.
6,147,471 A 11/2000 Hunter
6,160,381 A 12/2000 Peterzell
6,212,054 B1 4/2001 Chan
6,215,273 B1 4/2001 Shy
6,222,342 B1 4/2001 Eggert et al.
6,249,106 B1 6/2001 Turner et al.
6,262,492 B1 7/2001 Sheng
6,262,559 B1 7/2001 Eggert et al.
6,271,605 B1 8/2001 Carkner et al.
6,300,742 B1 10/2001 Hung
6,362,599 B1 3/2002 Turner et al.
6,384,573 B1 5/2002 Dunn
6,386,907 B1 5/2002 Ruffa
6,344,733 B1 7/2002 Crass
6,424,158 B2 7/2002 Klang
6,426,606 B1 7/2002 Purkey
6,632,103 B1 10/2003 Liu
6,648,701 B2 11/2003 Mouissie
6,650,086 B1 11/2003 Chang
6,679,212 B2 1/2004 Kelling
6,679,708 B1 1/2004 Depp et al.
6,756,764 B2 6/2004 Smith et al.
6,759,833 B1 7/2004 Chen
6,774,607 B2 8/2004 Moseneder et al.
6,799,993 B2 10/2004 Krieger
6,803,743 B2 10/2004 George et al.
6,822,425 B2 11/2004 Krieger et al.
6,856,764 B2 2/2005 Higuma
6,919,704 B1 7/2005 Healey
7,015,674 B2 3/2006 Vonderhaar
7,017,055 B1 3/2006 Ho
7,095,339 B2 8/2006 Peng et al.
7,148,580 B2 12/2006 Sodemann et al.
7,301,303 B1 11/2007 Hulden
7,339,347 B2 3/2008 Elder et al.
7,345,450 B2 3/2008 Krieger et al.
7,508,171 B2 3/2009 Carrier et al.
7,514,900 B2 4/2009 Sander et al.
D597,029 S 7/2009 Li
7,579,811 B2 8/2009 Satl et al.
7,656,118 B2 * 2/2010 Krieger H02J 7/0034
320/105
7,675,261 B2 3/2010 Elder et al.
7,679,317 B2 3/2010 Vaselec
7,749,031 B2 7/2010 Detter
7,791,319 B2 9/2010 Veselic et al.
D625,265 S 10/2010 DuMelle et al.
7,847,520 B2 12/2010 Veselic et al.
7,868,582 B2 1/2011 Sander et al.
7,872,361 B2 1/2011 Mcfadden
7,893,558 B2 2/2011 Lee
7,893,655 B2 2/2011 Veselic
7,893,657 B2 2/2011 Chavakula
8,030,900 B2 10/2011 Hussain et al.
D649,116 S 11/2011 Nakatsuka
8,076,900 B1 * 12/2011 Brown H02J 7/0042
320/105
8,125,181 B2 2/2012 Gregg et al.
8,172,603 B1 5/2012 Richardet, Jr.
8,199,024 B2 6/2012 Baxter et al.
8,362,745 B2 1/2013 Tinaphong
8,376,775 B2 2/2013 Rinhardt
8,493,021 B2 7/2013 Richardson et al.
D689,020 S 9/2013 Demirjian et al.
8,686,688 B2 4/2014 Han et al.
8,736,227 B2 5/2014 Chadbourne et al.
8,786,247 B2 7/2014 Ishino et al.
8,994,327 B2 3/2015 Kusch et al.

US 11,667,203 B2

Page 3

(56)	References Cited		2009/0039712 A1 *	2/2009	Czarnyszka	H02J 7/0034 307/127
	U.S. PATENT DOCUMENTS		2009/0108814 A1	4/2009	Wilkins	
	D726,109 S	4/2015 Nook et al.	2009/0174362 A1	7/2009	Richardson et al.	
	D726,114 S	4/2015 Nook et al.	2009/0218988 A1	9/2009	Richardson et al.	
	D726,121 S	4/2015 Nook et al.	2009/0236859 A1	9/2009	McFadden	
	9,007,015 B1	4/2015 Nook et al.	2009/0253312 A1	10/2009	Detter et al.	
	9,007,023 B2	4/2015 Dao	2010/0001682 A1	1/2010	Dickson et al.	
	9,041,244 B2	5/2015 Graf	2010/0013302 A1	1/2010	Howell et al.	
	9,048,666 B2	6/2015 Su	2010/0052620 A1	3/2010	Wong	
	9,070,938 B2	6/2015 Hashimoto et al.	2010/0055546 A1	3/2010	Elder et al.	
	D735,665 S	8/2015 Nook et al.	2010/0129723 A1	5/2010	Noda et al.	
	9,153,978 B2	10/2015 Reade	2010/0173182 A1	7/2010	Baxter	
	D746,774 S	1/2016 Nook et al.	2010/0181959 A1	7/2010	Gibbs et al.	
	9,243,601 B2	1/2016 Reichow	2010/0244766 A1	9/2010	Olsberg	
	9,263,717 B2	2/2016 Nakano et al.	2010/0283623 A1	11/2010	Baxter et al.	
	9,263,907 B2	2/2016 Richardson et al.	2010/0301800 A1	12/2010	Inskeep	
	9,287,725 B2	3/2016 Huffman et al.	2011/0068734 A1 *	3/2011	Waldron	H01M 10/4285 320/107
	9,506,446 B2	11/2016 Liu	2011/0117408 A1	5/2011	Lennox	
	9,525,297 B2	12/2016 Wang	2011/0127947 A1	6/2011	Hunter et al.	
	9,537,136 B2	1/2017 Ryu	2011/0140651 A1	6/2011	Dai	
	9,601,800 B2	3/2017 Nakamoto et al.	2011/0175461 A1 *	7/2011	Tinaphong	H02J 50/402 307/149
	9,608,294 B2	3/2017 Ko	2011/0250473 A1	10/2011	Kim	
	9,718,419 B2	8/2017 Proebstle	2011/0268996 A1	11/2011	Lee	
	9,748,541 B2	8/2017 Burke	2011/0279089 A1	11/2011	Yeo	
	9,748,778 B2	8/2017 Toya	2011/0308856 A1	12/2011	Park	
	9,770,992 B2	9/2017 Nook et al.	2012/0013189 A1	1/2012	Jenkins	
	9,809,183 B2	11/2017 Weffen	2012/0025766 A1	2/2012	Reade	
	9,871,392 B2	1/2018 Durando et al.	2012/0038365 A1	2/2012	Nagata et al.	
	9,874,611 B2	1/2018 Whiting et al.	2012/0068662 A1	3/2012	Durando et al.	
	9,954,391 B2	4/2018 Lei	2012/0091944 A1	4/2012	Rogers	
	10,084,173 B2	9/2018 Ha	2012/0126818 A1	5/2012	Ishihara	
	10,087,904 B2 *	10/2018 Butler	2012/0139498 A1	6/2012	Chang	
	10,128,483 B2	11/2018 Lee	2012/0169116 A1	7/2012	Graf	
	10,218,172 B2	2/2019 Chen et al.	2012/0187897 A1	7/2012	Lenk et al.	
	10,328,806 B2	6/2019 Wang et al.	2012/0270097 A1	10/2012	Yasui et al.	
	10,328,808 B2	6/2019 Nook et al.	2012/0295150 A1	11/2012	Gao et al.	
	10,604,024 B2	3/2020 Nook et al.	2012/0299533 A1	11/2012	Huffman et al.	
	10,981,452 B2	4/2021 Nook et al.	2012/0319487 A1	12/2012	Shah	
	11,104,236 B2 *	8/2021 Wang	2013/0084471 A1	4/2013	Han et al.	
	2001/0025618 A1	10/2001 Kelling	2013/0104817 A1	5/2013	Miller	
	2001/0003827 A1	11/2001 Resch et al.	2013/0154543 A1	6/2013	Richardson et al.	
	2002/0041174 A1	4/2002 Purkey	2013/0154544 A1	6/2013	Yokoyama et al.	
	2002/0007500 A1	6/2002 Fridman et al.	2013/0154550 A1	6/2013	Balmefrizol et al.	
	2002/0007699 A1	6/2002 Mouissie	2013/0162029 A1	6/2013	Reichow	
	2002/0121877 A1	9/2002 Smith et al.	2013/0241488 A1	9/2013	Dao	
	2002/0155752 A1	10/2002 Winkle et al.	2013/0241498 A1	9/2013	Koebler	
	2003/0096158 A1	5/2003 Takano et al.	2013/0295444 A1	11/2013	Kim et al.	
	2003/0141845 A1	7/2003 Krieger	2013/0314041 A1	11/2013	Proebstle	
	2004/0066168 A1	4/2004 George	2014/0045001 A1	2/2014	Yang	
	2004/0106038 A1	6/2004 Shimamura et al.	2014/0077755 A1	3/2014	Zhang	
	2004/0130298 A1	7/2004 Krieger	2014/0084844 A1	3/2014	Weffen	
	2004/0150373 A1	8/2004 Chan	2014/0113463 A1	4/2014	Peterson et al.	
	2004/0239290 A1	12/2004 Krieger	2014/0127550 A1	5/2014	Roh et al.	
	2005/0040788 A1	2/2005 Tseng	2014/0139175 A1	5/2014	Gonzalez	
	2005/0077870 A1 *	4/2005 Ha	2014/0159509 A1	6/2014	Inskeep	
			2014/0210399 A1	7/2014	Urschel	
	2005/0082833 A1	4/2005 Sodemann et al.	2014/0368155 A1	12/2014	Chen	
	2005/0110467 A1	5/2005 Thomason	2015/0012174 A1	1/2015	Kim et al.	
	2005/0116688 A1	6/2005 Yin	2015/0015184 A1	1/2015	Su	
	2005/0162124 A1	7/2005 Bertness et al.	2015/0037662 A1	2/2015	Pinon et al.	
	2005/0213867 A1	9/2005 Rajendran et al.	2015/0054336 A1	2/2015	Liu	
	2005/0252573 A1	11/2005 Montani	2015/0087182 A1	3/2015	Zhao et al.	
	2006/0071631 A1	4/2006 Cheung et al.	2015/0137740 A1	5/2015	Allos	
	2006/0176011 A1	8/2006 Lui	2015/0222060 A1	8/2015	Kim et al.	
	2006/0220610 A1	10/2006 Solberg	2015/0236329 A1	8/2015	Okuda et al.	
	2006/0244412 A1	11/2006 Bonzer	2015/0306964 A1	10/2015	Wang	
	2007/0132427 A1	6/2007 Veselic	2015/0340907 A1	11/2015	Lei	
	2007/0132537 A1	6/2007 Osbun	2015/0380697 A1	12/2015	Osborne et al.	
	2007/0178777 A1	8/2007 Miekka	2016/0001666 A1	1/2016	Nook et al.	
	2007/0182363 A1	8/2007 Yang	2016/0111914 A1	4/2016	Willard et al.	
	2007/0278990 A1	12/2007 Raichle	2016/0141728 A1	5/2016	Fauteux et al.	
	2007/0285049 A1	12/2007 Krieger et al.	2016/0155996 A1	6/2016	Dai	
	2008/0131764 A1	6/2008 Saiki	2016/0181587 A1	6/2016	Koebler	
	2008/0150473 A1	6/2008 Wise	2017/0012448 A1 *	1/2017	Miller	H02J 7/0031
	2008/0143290 A1	7/2008 Chavakula	2017/0084899 A1	3/2017	Deng et al.	
	2008/0157732 A1	7/2008 Williams	2017/0309872 A1	10/2017	Kuboki et al.	
	2009/0026837 A1	1/2009 Lee				

(56)

References Cited

U.S. PATENT DOCUMENTS

2018/0111491 A1 4/2018 Nook et al.
 2018/0215274 A1 8/2018 Nook et al.
 2018/0269703 A1 9/2018 Nook et al.
 2018/0342891 A1 11/2018 Nook et al.
 2018/0345803 A1 12/2018 Nook et al.
 2018/0369599 A1 12/2018 Smith
 2019/0081472 A1 3/2019 Guo et al.
 2019/0308518 A1 10/2019 Nook et al.

FOREIGN PATENT DOCUMENTS

AU 2016269555 B2 1/2017
 AU 2016392707 A1 11/2017
 AU 2017217661 B2 11/2018
 AU 2019201081 A1 3/2019
 AU 2019201559 A1 3/2019
 AU 2020201223 A1 3/2020
 CA 107977 A 10/1907
 CA 105457 S 6/2005
 CA 118796 S 1/2008
 CA 137883 S 6/2011
 CA 145036 S 2/2013
 CA 2916782 A1 1/2016
 CA 2957431 A1 8/2017
 CA 3005971 A1 8/2017
 CN 1440892 A 9/2003
 CN 201947042 U 8/2011
 CN 202058834 U 11/2011
 CN 102414923 A 4/2012
 CN 102447288 A 5/2012
 CN 202696190 U 1/2013
 CN 103035874 A 4/2013
 CN 103066662 4/2013
 CN 203211234 U 9/2013
 CN 203504235 U 3/2014
 CN 103715737 A 4/2014
 CN 203522157 U 4/2014
 CN 104118374 A 10/2014
 CN 104442429 A 3/2015
 CN 104488111 A 4/2015
 CN 104795527 A 7/2015
 CN 204516832 U 7/2015
 CN 204966731 U 1/2016
 CN 107852004 A 3/2018
 CN 108884801 A 11/2018
 DE 29507501 U1 6/1995
 DE 202009016260 U1 3/2010
 DE 102010062708 6/2012
 DE 202013102599 U1 8/2013
 DE 102014114997 A1 1/2016
 DE 112016002206 T5 3/2018
 DE 20 2014 011 413 U1 4/2020
 EP 2105980 9/2009
 EP 2472698 A2 7/2012
 EP 2605313 6/2013
 EP 0616409 9/2014
 EP 3286429 A1 2/2018
 EP 3308446 A1 4/2018
 EP 3407405 A1 11/2018
 GB 2 265 267 A 9/1993
 GB 2527848 A 1/2016
 GB 2557733 A 6/2018
 GB 2562950 A 11/2018
 JP 2001069673 A 3/2001
 JP 2002141056 A 5/2002
 JP 2003-112586 A 4/2003
 JP 2008-146998 A 6/2008
 JP 2011023249 A 2/2011
 JP 2012-004106 A 1/2012
 JP 2012169161 A 9/2012
 JP 2012-230962 A 11/2012
 JP 3182855 U 3/2013
 JP 3182855 U 4/2013
 JP 3185027 U 7/2013
 JP 2014-523623 A 9/2014

JP 2014232666 A 12/2014
 JP 2015-115979 A 6/2015
 JP 2018534892 A 11/2018
 JP 2018536789 A 12/2018
 PH 1/2013/500793 1/2017
 WO 2000/024108 A1 4/2000
 WO 2004036714 A1 4/2004
 WO 2005/038952 A2 4/2005
 WO 2006/057497 6/2006
 WO 2010129723 A2 11/2010
 WO 2011/113734 9/2011
 WO 2012/036556 3/2012
 WO 2012/068635 A1 5/2012
 WO 2012/074548 6/2012
 WO 2012/080996 6/2012
 WO 2012/081140 A1 6/2012
 WO 2013137873 A1 9/2013
 WO 2014/106407 10/2014
 WO 2014/206323 12/2014
 WO 2015/195321 A1 12/2015
 WO 2016003471 A1 1/2016
 WO WO-2016025869 A1 * 2/2016 H02J 7/0021
 WO 2017138963 A1 8/2017
 WO 2017139524 A1 8/2017

OTHER PUBLICATIONS

Exhibit 1008, www.xcar360.com.
 Exhibit 1009, www.electronicshub.org.
 Exhibit 1010, USB Battery Charging 1.2 Compliance Plan.
 Petition for Inter Partes Review of U.S. Pat. No. 9,007,015; IPR 2020-00944, filed May 14, 2020, 99 pages.
 Exhibit 1012, Model: Epower-20B brochure, 1 page.
 Exhibit 1013, Model: Epower-21 brochure, 1 page.
 Exhibit 1015, Fairchild Semiconductor brochure, MC78XX/LM78XX/MC78XXA, 28 pages.
 Report on the filing or determination of an action regarding a patent or trademark, filed Oct. 19, 2017, *The NOCO Company, Inc. v. Shenzhen Valuelink E-Commerce Co., Ltd.*, U.S. District Court for the Northern District of Ohio, Eastern Division, 1 page.
 Report on the filing or determination of an action regarding a patent or trademark, filed Oct. 19, 2017, *The NOCO Company, Inc. v. Shenzhen ChangXin Yang Technology Co., Ltd.*, U.S. District Court for the Northern District of Ohio, Eastern Division, 1 page.
 Report on the filing or determination of an action regarding a patent or trademark, filed Oct. 19, 2017, *The NOCO Company, Inc. v. SZ Jingxinghui Electronics Technology Co., Ltd.*, U.S. District Court for the Northern District of Ohio, Eastern Division, 1 page.
 Report on the filing or determination of an action regarding a patent or trademark, filed Oct. 19, 2017, *The NOCO Company, Inc. v. Shenzhen Anband Technology Co., Ltd.*, U.S. District Court for the Northern District of Ohio, Eastern Division, 1 page.
 Report on the filing or determination of an action regarding a patent or trademark, filed Oct. 30, 2017, *The NOCO Company, Inc. v. Shenzhen Dika Na'er E-Commerce Co., Ltd.*, U.S. District Court for the Northern District of Ohio, Eastern Division, 1 page.
 PTAB notice regarding petition filed in U.S. Pat. No. 9,007,015, U.S. Appl. No. 14/325,938, filed Jan. 15, 2018, IPR2018-00503, 1 page.
 Report on the filing or determination of an action regarding a patent or trademark, filed Sep. 13, 2018, *The NOCO Company, Inc. v. Halo2 Cloud, LLC, QVC, Inc.*, U.S. District Court Delaware, 1 page.
 Notice of Filing Date Accorded to Petition and Time for Filing Patent Owner Preliminary Response, mailed May 21, 2020, *Shenzhen Carlu Technology Co., Ltd. v. The NOCO Company*, IPR2020-00944, U.S. Pat. No. 9,007,015, 4 pages.
 International Search Report in corresponding PCT/US2014/045434, dated Nov. 3, 2014.
 Australian Patent Opposition #1, Australian Patent Application No. 2016269555, Statement of Grounds of Particulars, Brown & Watson International Pty Ltd., Jun. 6, 2019, 6 pages; particular (e), the offering for sale and sale by Asia Bright Industrial (Hong Kong) Co, Ltd. of products identified as the JPS Jump Starter and the JPR Jump Starter prior to Jul. 2014.

(56)

References Cited

OTHER PUBLICATIONS

Australian Patent Opposition #1, Australian Patent Application No. 2016269555, Evidence in Support, filed Sep. 6, 2019, 24 pages.

Australian Patent Opposition #1, Australian Patent Application No. 2016269555, Evidence in Support—Exhibits, filed Sep. 6, 2019, 166 pages; Annexure MD-1, early specification sheets for “the BW Jumpstarter”, 4 pages; Annexure MD-2, product manual for “the BW Jumpstarter”, PROJECTA; “2×22 Amp Hour High Performance Jumpstarter”; 2013; 20 pages.

Australian Patent Opposition #2, Australian Patent Application No. 2019201559, Statement of Grounds and Particulars, filed May 21, 2020, 8 pages.

The NOCO Company v. Deltona Transformer Corporation and Deltran USA, LLC, Defendant Deltran USA, LLC’s Invalidation Contentions, In the United States District Court for the Middle District of Florida, Orlando Division, USB Implementers Forum, Inc., Battery Charging Specification, Revision 1.1, Apr. 15, 2009 on p. 8, Prior Art Offered for Sale or Publicly Used or Known on pp. 8-10, Micro-Start/PPS, E-Power, Battery Tender Power Pack, PowerAll, and Electromate 400 on p. 10; 141 pages.

The NOCO Co., Inc. v. Smartech Products, Inc., et al., Smartech, Inc.’s Invalidity and Unenforceability Contents, Bestek 2400A Peak Current Portable Car Jump Starter Power Bank with 1000mAh Capacity (Smartech 00062-00069)(“Bestek”) on p. 2; HALO 7800 mAh Portable Charger for Cell Phones & Tablets (Smartech 00070-00071)(“HALO”) on p. 2; Schumacher Lithium Iron Jump Starter—SL1 Red Fuel (Smartech 00072-00073)(“Schumacher”) on p. 2, filed Jun. 19, 2019, 8 pages.

Petition for Inter Partes Review of U.S. Pat. No. 9,007,015; 49 pages; filed Jan. 15, 2018.

Report on the filing or determination of an action regarding a patent; U.S. Pat. No. 9,007,015; issued on Oct. 23, 2018; 1 page.

Report on the filing or determination of an action regarding a patent; U.S. Pat. No. 9,007,015; issued on Sep. 21, 2018; 1 page.

Report on the filing or determination of an action regarding a patent; U.S. Pat. No. 9,007,015; issued on Feb. 27, 2018; 1 page.

Report on the filing or determination of an action regarding a patent; U.S. Pat. No. 9,007,015; issued on Dec. 5, 2017; 1 page.

PROJECTA; “2×22 Amp Hour High Performance Jumpstarter”; 2013; pp. 1-20.

Australian Office Action for AU Patent Application No. AU2020201224, dated Oct. 26, 2021.

Declaration by Cory Seligman (30 Pages) and Annexure marked CS-1 (137 Pages), in the matter of AU 2019201559 and Opposition by Brown & Watson; Nov. 23, 2020.

Petition for Inter Partes Review of U.S. Pat. No. 9,007,015 for *Shenzhen Mediatek Tong Technology v. Noco Company* (69 Pages); IPR2020-01387; Jul. 29, 2020.

Petition for Inter Partes Review of U.S. Pat. No. 9,007,015 for *Guangdong Boltpower Energy Co., Ltd. v. Noco Company* (106 Pages); IPR2021-00309; Dec. 11, 2020.

Exhibit 1004 from IPR2021-00309; PTAB Decision Denying Institution of Inter Partes Review of the ‘015 patent in Case IPR2018-00503.

Exhibit 1016 from IPR2020-01387; *The NOCO Company, Inc. v. Shenzhen Lianfa Tong Technology Co. Ltd., et al.*, Case No. 1:19-cv-01855, (N.D. Ohio) First Amended Complaint for Patent Infringement.

XP 55517268A 1, NOCO Product Brochure, Jump Starter, Lithium GB70 2000A 12V.

XP 55517270A 1, NOCO Product Brochure, Jump Starter, Lithium GB40 1000A 12V.

USB Battery Charging Specification Version 1.2 (EX1009).

Datasheet for LM7805 Voltage Regulator from Fairchild Semiconductor (EX1019).

Grounds of Invalidity: Annex A to the Grounds of Invalidity; PROJECTA product manual for 2200A Jumpstarter, P/Nos. HP 2012, HP 2200; Carku E-Power 21 device.

Grounds of Invalidity: Prior use of the Carku E-Power 21 device (“Carku E-Power 21”); User manual for Carku E-Power 21 (Ann

1.); Specification sheet for Carku E-Power 21 (Ann 2); Claimant’s E-catalogue dated Apr. 22, 2014, which included Carku E-Power 21 (Ann 3); Photograph of claimants’ booth at 115th 2014 Canton Fair (Ann 4); Photographs and quotation sheet rcvd by Edelbert Lenz GmbH & Co. KG (Ann 5); User manuals and specification sheets rcvd by Kaz Corp. of Japan (Ann 6); E-Catalogue rcvd by email by Krautli (Schweiz) AG (Ann 7).

Defendant Deltona Transformer Corporation’s Invalidation Contentions: USB Implementers Forum, Inc., Battery Charging Specification, Rev 1.1, Apr. 15, 2009; Micro-Start/PPS, offered for sale as late as Jul. 29, 2013, by Antigravity Batteries; E-Power, offered for sale as late as Apr. 15, 2013 by Carku; Battery Tender Power Pack, offered for sale prior to Jul. 3, 2014 by Carku/Deltran USA LLC; PowerAll, offered for sale as late as Mar. 26, 2014 by Gryphon Mobile Electronics LLC; Electromate 400, offered for sale as late as 2013 by Black & Decker.

Defendant TH Trading Inc.’s Invalidation Contentions.

Defendant’s Invalidation and Unenforceability Contentions: USB Battery Charging Spec Ver 1.2; E-flite EC Connector Assembly Instruct w 2008; Datasheet for LM7805 Voltage Regulator from Fairchild Semiconductor; Carku Product Brochure for Epower-20 jump starter product; Carku Product Brochure for Epower-21 jump starter product; MC78XX/LM78XX/MC78XXA 3-Terminal 1A Positive Voltage Regulator from Fairchild Semiconductor Corp. 2001; Patent Owner The NOCO Company’s Preliminary Response in Dongguan IPR.

Memo Opin and Order of US Dist Ct Jud Barker construing disputed terms of claims 1, 9 and 19 of the ‘015 issued *NOCO v. Smartech Products, Inc.*, 1:18-cv-2780 (N.D. Ohio Apr. 2, 2020; *NOCO Amend Compl NOCO v Shenzhen Lianfa Tong Tech Co., Ltd., et al.*, 1:19-cv-01855 (N.D. Ohio Apr. 2, 2020; Dec Wan; Dec Hartup; Dec Kirtley; Special Master Report on Prop Claim Const For U.S. Pat. No. 9,007,015 issued *NOCO v. Shenzhen Dika Na’Er E-Commerce Co.*, 1:17CV2282 (N.D. Ohio Jun. 28, 2018) acc/adopt by US Dist Ct Jud Boyko, 2019 WL 1723358.

Defendants’ Amended Final Invalidation and Unenforceability Contentions: The Powerall PBJ512000RD Jump Starter, offered for sale by Gryphon Mobile Electronics at least as early as Nov. 5, 2013; The Lightning 12V Jump Starter, offered for sale by Pilot, Inc. at least as early as Mar. 2014; The L3 Model Jump Starter, offered for sale by Shenzhen Tsevie Company at least as early as May 19, 2019. Statement of Defense and Counterclaim: Carku Epower-20 jump starter; Carku Epower-21 jump starter; Carku Product Brochure for the Epower-20 jump starter product; Carku Product Brochure for the Epower-21 jump starter product.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed Aug. 14, 2019, *The NOCO Company, Inc. v. Shenzhen Lianfa Tong Technology Co., Ltd. and Shenzhen Mediatek Tong Technology Co., Ltd.*, 1 page.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed Aug. 14, 2019, *The NOCO Company, Inc. v. Sictec Instruments Company Limited*, 1 page.

Decision Granting Institution of Inter Partes Review, U.S. Pat. No. 9,007,015, U.S. Appl. No. 14/325,938 on Nov. 12, 2020, IPR2020-00944, 70 pages.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed May 28, 2020, *The NOCO Company, Inc. v. Shenzhen Yike Electronics*, 1 page.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed May 28, 2020, *The NOCO Company, Inc. v. Guangzhou Unique Electronics Co., Ltd. and Sui Cheng Limited*, 1 page.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed May 28, 2020, *The NOCO Company, Inc. v. Zhejiang Quingyou Electronic Commerce Co., Ltd.*, 1 page.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed May 28, 2020, *The NOCO Company, Inc. v. Shenzhen GOOLOO E-Commerce Co., Ltd.*, 1 page.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed May 28, 2020, *The NOCO Company, Inc. v. Nice Team Enterprise Limited*, 1 page.

(56)

References Cited

OTHER PUBLICATIONS

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed May 28, 2020, *The NOCO Company, Inc. v. Aukey Technology Co., Ltd.*, 1 page.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed Mar. 16, 2020, *The NOCO Company, Inc. v. Nekteck, Inc.*, 1 page.

Report on the Filing or Determination of an Action Regarding a Patent or Trademark, filed Mar. 13, 2020, *The NOCO Company, Inc. v. Medcursor, Inc.*, 1 page.

Australian Patent Opposition #2, Notice of Opposition, Australian Patent Application No. 2019201559, Brown & Watson International Pty Ltd., Feb. 21, 2020, 1 page.

The offering for sale and sale by ATD Tools, Inc of a product identified as the ADT 5900 Jump Starter prior to Jul. 2014.

Australian Patent Opposition #3, Notice of Opposition, Australian Patent Application No. 2020201223, Brown & Watson International Pty Ltd., Aug. 7, 2020.

German Patent Opposition. German Patent Application No. 102014114997.

D21 advertisement brochure of the opponent transmitted on Dec. 22, 2013.

D22 advertisement brochure of the opponent transmitted on Apr. 23, 2014.

D23 SGS test report relating to jump start devices of the opponent dated Apr. 21, 2014.

D24 TWM417714U1.

D24a machine translation of D24.

D25 data sheet of Topcomtechnology Co., Ltd., for the product "Universal Power Bank", dated Nov. 15, 2011.

D28 affidavit of the manager of the requesting party, 2013.

German Nullity Action, German Patent Application No. 202014011347.5.

The NOCO Company v. Ring Automotive Limited, HP-2020-000022, Grounds of Invalidity, In the High Court of Justice Business And Property Courts of England and Wales Intellectual Property List (ChD) Patents Court, 2 pages.

The making available to the public by supply, description and/or use of the HP2200 jump starter described in the manual dated Aug. 2013 at Annex A Before Jul. 3, 2014 including in and after Aug. 2013 ("HP2200") (cited on p. 1 of reference *The NOCO Company v. Ring Automotive Limited*, HP-2020-000022, Grounds of Invalidity). The Carku E-Power 21 device in so far as it is established to have been made available to the public in the Earlier Proceedings (Carku E-Power 21) (cited on p. 2 of reference *The NOCO Company v. Ring Automotive Limited*, HP-2020-000022, Grounds of Invalidity).

The NOCO Company v. Shenzhen Valuelink E-Commerces Co., Ltd., Case No. 1:17-cv-02210, Defendants' Amended Final Invalidity and Unenforceability Contents, Sep. 23, 2019, 5 pages.; The Powerall PBJS12000RD Jump Starter ("Powerall Jump Starter"), offered for sale by Gryphon Mobile Electronics at least as early as Nov. 5, 2013; The Lightning 12V Jump Starter (Lightning Jump Starter), offered for sale by Pilot, Inc. at least as early as Mar. 2014; The L3 Model Jump Starter, offered for sale by Shenzhen Tsevie Company as Early as May 19, 2019.

Notification of Material filed under Section 27, Australian Government IP Australia, Nov. 8, 2016 (3 pages); Declaration of Sheridan Lee (8 pages); Annexure SL-1 (8 pages); Annexure SL-2 (10 pages); Annexure SL-3 (9 pages); Annexure SL-4 (18 pages); Annexure SL-5, JP 3185027 (14 pages); Annexure SL-6 of English Translation of JP 3185027 (17 pages) and US 2004/0130298 (14 pages).

This Portable USB Charger Battery Pack Can Also Jump Start Your Car (viewed on Internet on Oct. 27, 2020) <URL: <https://www.howtogeek.com/179499/this-portable-usb-charger-battery-pack-can-also-jump-start-your-car/>>, published on Jan. 13, 2014.

Clore Automotive, LLC, U.S. International Trade Commission, Investigation No. 337-TA-1256, Response of Clore Automotive, LLC to the Amended Complaint and Notice of Investigation, pp. 150-151.

Deltran USA, LLC, U.S. International Trade Commission, Investigation No. 337-TA-1256 Deltran USA, LLC's Response to the Amended Complaint and Notice of Investigation, pp. 196-219.

Schumaker Electric Corporation and Schumacher Power Technology (Binhai) Co. Ltd., U.S. International Trade Commission, Investigation No. 337-TA-1256, Response of Schumacher Electric Corporation and Schumacher Power Technology (Binhai) Co. Ltd., to the Complaint of the NOCO Company Under Section 337 of the Tariff Act of 1930 and Notice of Investigation, pp. 180-184.

Best Buy Co., Inc., U.S. International Trade Commission, Investigation No. 337-TA-1256, Response of Best Buy Co., Inc. to the First Amended Complaint and the Notice of Investigation, pp. 69-71.

Guangdong Boltpower Energy Co, Ltd., U.S. International Trade Commission, Investigation No. 337-TA-1256, Response of Guangdong Boltpower Energy Co., Ltd. to the First Amended Complaint and the Notice of Investigation, pp. 73-74.

Winplus North America, Inc. U.S. International Trade Commission, Investigation No. 337-TA-1256, Response of Winplus North America, Inc. to the Amended Complaint and the Commissioner's Notice of Investigation, Exhibit B, pp. 1-5.

Autozone, Inc., U.S. International Trade Commission, Investigation No. 337-TA-1256, Respondents Autozone, Inc. and Best Parts, Inc.'s Response to the Amended Complaint and Notice of Investigation.

Walmart Inc., U.S. International Trade Commission, Investigation No. 337-TA-1256, Response of Walmatr Inc., to the Complaint of the NOCO Company Under Section 337 of the Tariff Act of 1930 and Notice of Investigation.

Smartech Products, Inc., U.S. International Trade Commission, Investigation No. 337-TA-1256, Respondent Smartech Products, Inc.'s Response to the Complaint Under 337 of the Tariff Act of 1930, as Amended, and Notice of Investigation, pp. 98-102.

Halo2cloud, LLC and ZAGG Inc., U.S. International Trade Commission, Investigation No. 337-TA-1256, Response of Halo2Cloud, LLC and ZAGG Inc to the Second Amended Complaint and Notice of Investigation, pp. 141-142.

QVC, Inc., U.S. International Trade Commission, Investigation No. 337-1256, Response of QVC, Inc. to the Second Amended Complaint and Notice of Investigation, pp. 144-145.

In re Certain Portable Battery Jumpstarters and Components Thereof, 3370TA01256, United States International Trade Commission (Mar. 17, 2021).

Fairchild MC78XX/LM78XX/MC78XXA 3-Terminal 1A Positive Voltage Regulator.

USB Battery Charging 1.2 Compliance Plan, Rev. 1.0.

Xysemi XR3403.

Texas Instruments LM2621.

USB Implementers Forum, Inc., Battery Charging Specification, Revision 1.1.

Caraku Epower-20B catalog information.

USB Power Delivery Specification 1.0, Jul. 16, 2012, Exhibit 1045.

IP Australia, Appl. 2022200746, Examination Report No. 1, dated Nov. 3, 2022.

IP Australia, Appl. 2022201338, Examination Report No. 1, dated Feb. 7, 2023.

The NOCO Company v. Shenzhen Dika Na'er E-Commerce (Lead Case No. 1:17-cv-02282), *The NOCO Company v. Shenzhen Changxinyang Technology Co., Ltd* (Case No. 1:117-cv-02209). *The NOCO Company v. Shenzhen Valuelink E-Commerces Co., Ltd* (Case No. 1:17-cv-02210), Defendants' Amended Final Invalidity and Unenforceability Contents, The Powerall PBJS12000RD Jump Starter ("Powerall Jump Starter"), offered for sale by Gryphon Mobile Electronics at least as early as Nov. 5, 2013, on p. 2, The Lightning 12V Jump Starter ("Lightning Jump Starter"), offered for sale by Pilot, Inc. at least as early as Mar. 2014, on p. 2, and The L3 Model Jump Starter, offered for sale by Shenzhen Tsevie Company at least as early as May 19, 2019, on p. 2, Sep. 23, 2019, 5 pages.

The NOCO Company, Inc. v. Shenzhen Changxinyang Technology Co., Ltd., Case No. 1:17-cv-02209, Defendants' Amended Final Invalidity and Unenforceability Contents, In the US District Court of Northern Ohio, Eastern District. The Powerall PBJS12000RD

(56)


References Cited


OTHER PUBLICATIONS



Jump Starter ("Powerall Jump Starter"), offered For sale by Gryphon Mobile Electronics at least as early Nov. 5, 2013; The Lightning 12V Jump Starter (Lightning Jump Starter), offered for sale by Pilot, Inc. at least as early Mar. 2014; The L3 Model Jump Starter, offered for sale by Shenzhen Tsevie Co as Early May 19, 2019.

Shenzhen Caraku Technology Co., Ltd., 70MAI Co., Ltd., Antigravity Batteries LLC, Gooloo Technologies LLC, Great Neck Saw Manufacturers, Inc., Horizon Tool, Inc., MATCO Tools Corporation, Nekteck, Inc., Paris Corporation, Powermax Battery (U.S.A.), Inc., and Shenzhen Gooloo E-Commerce Co., Ltd. U.S. International Trade Commission, Investigation No. 337-TA-1256, Shenzhen Caraku Technology Co., Ltd., 70MAI Co., Ltd., Antigravity Batteries LLC, Gooloo Technologies LLC, Great Neck Saw Manufacturers, Inc., Horizon Tool, Inc., Matco Tools Corporation, Nekteck, Inc., Paris Corporation, Powermax Battery (U.S.A.), Inc. and Shenzhen Gooloo E-Commerce Co., Ltd.'s Response to the Amended Complaint and Notice of Investigation, Exhibit B, pp. 1-3.

* cited by examiner

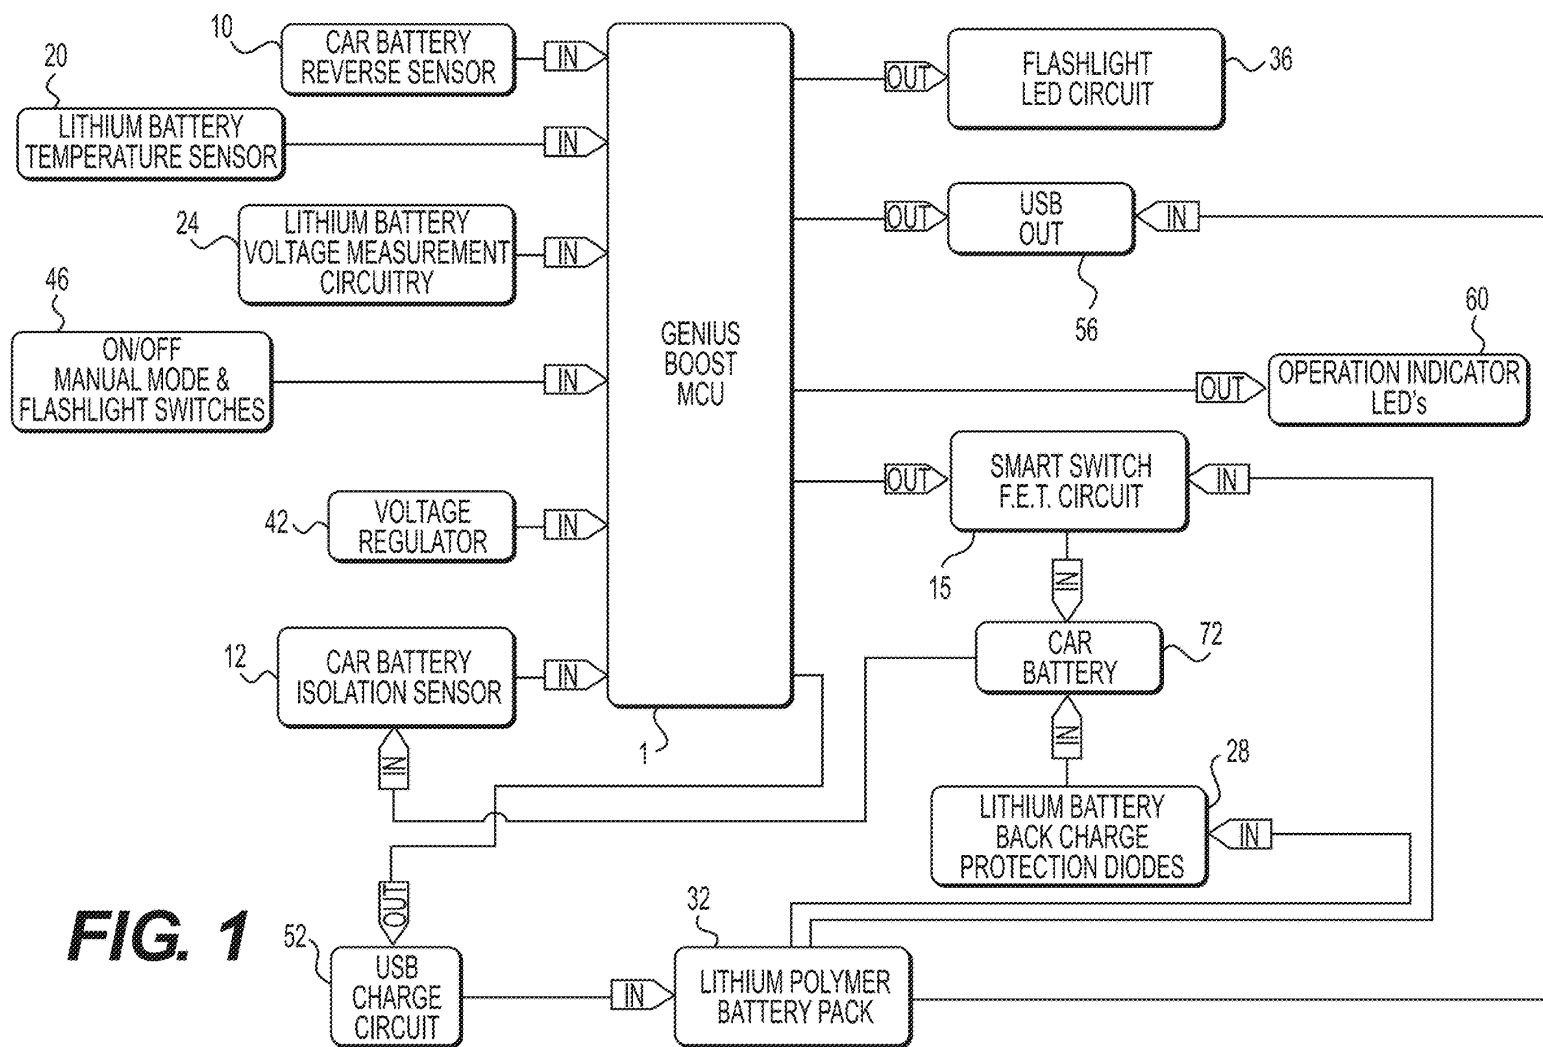

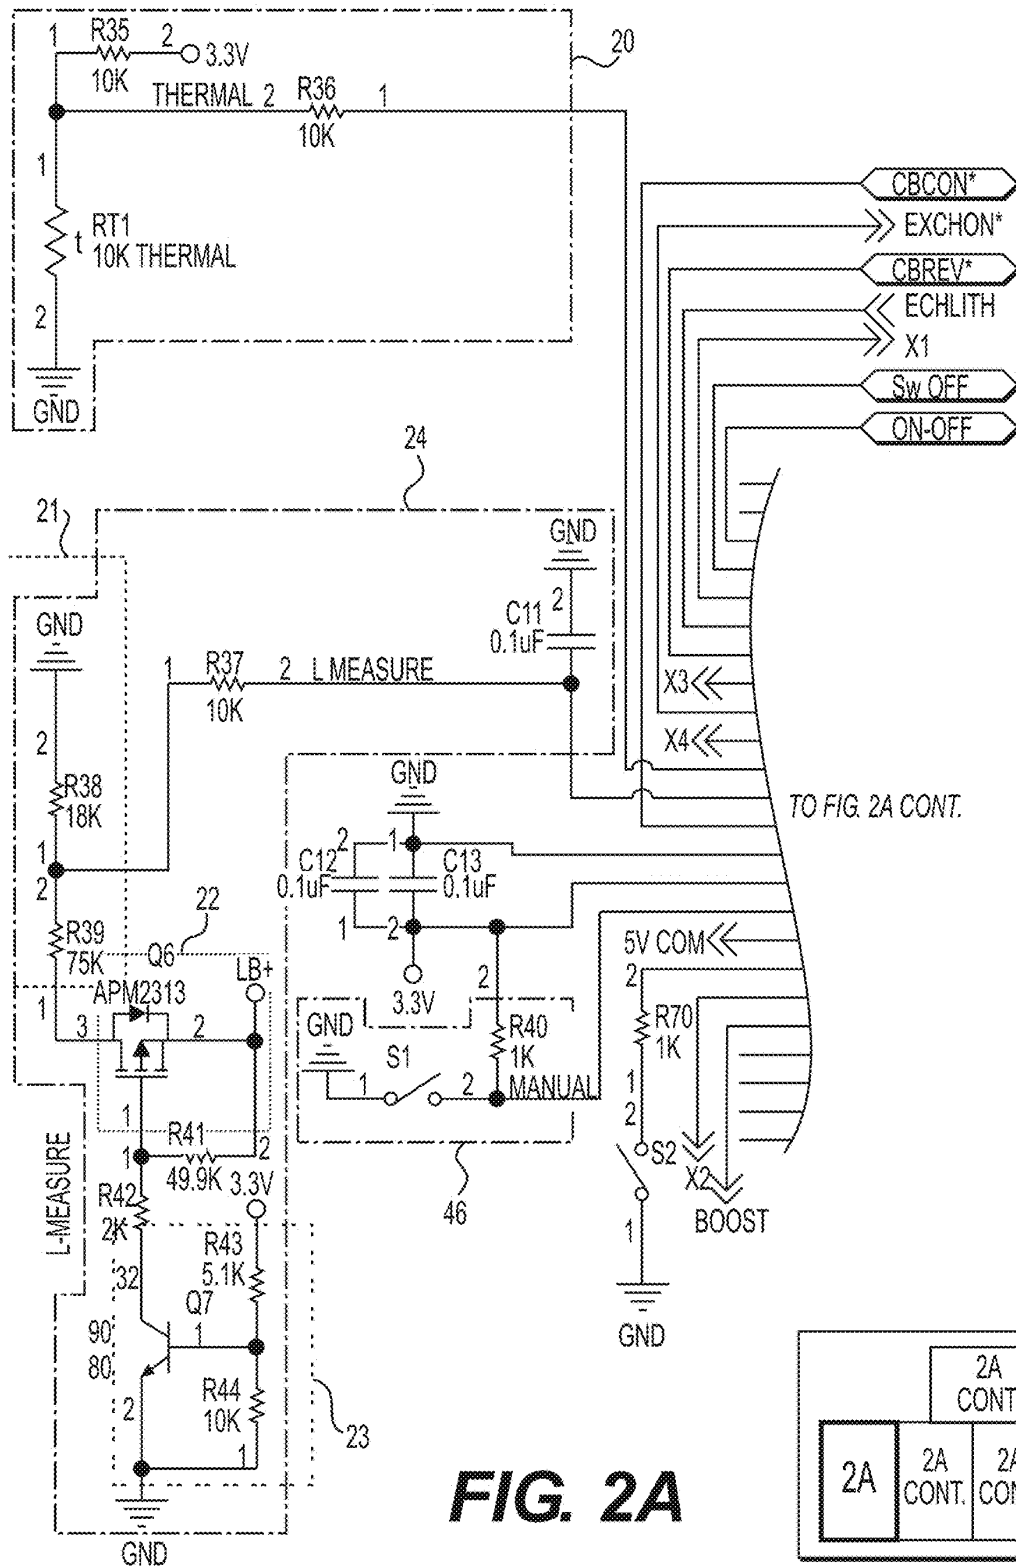

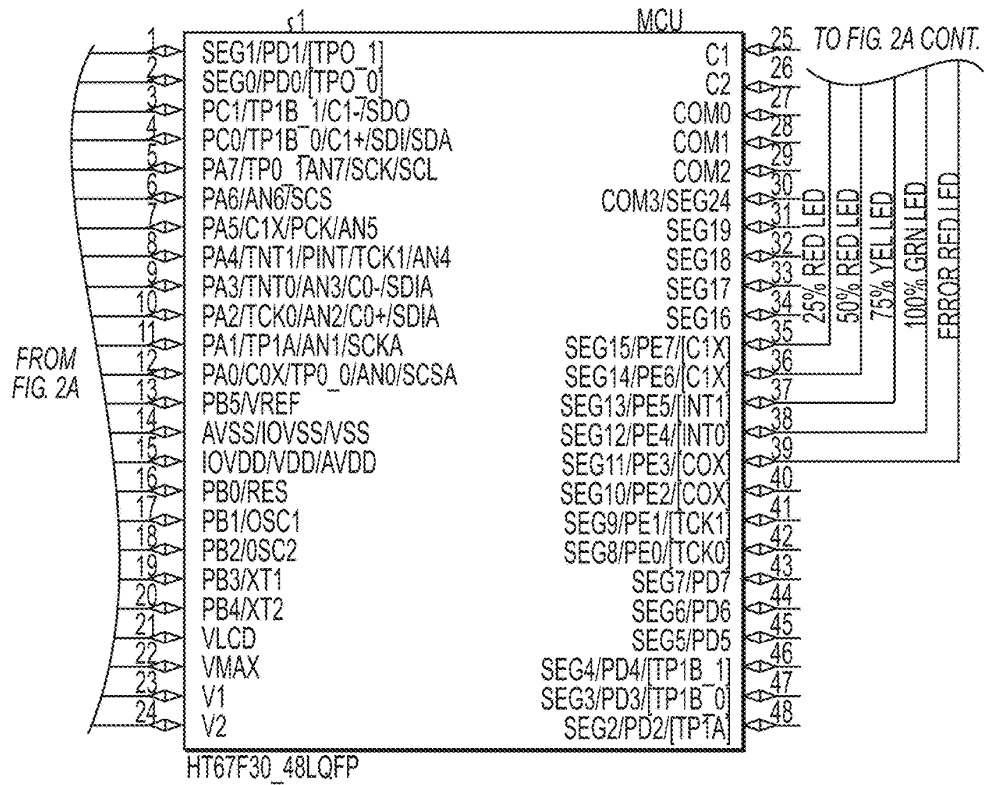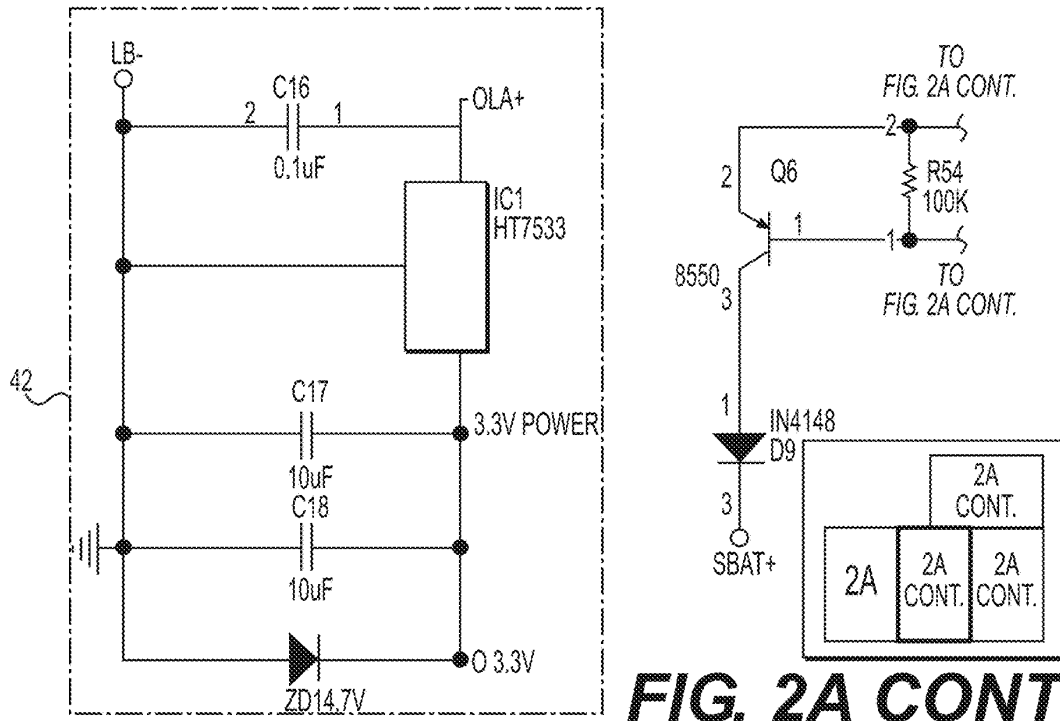

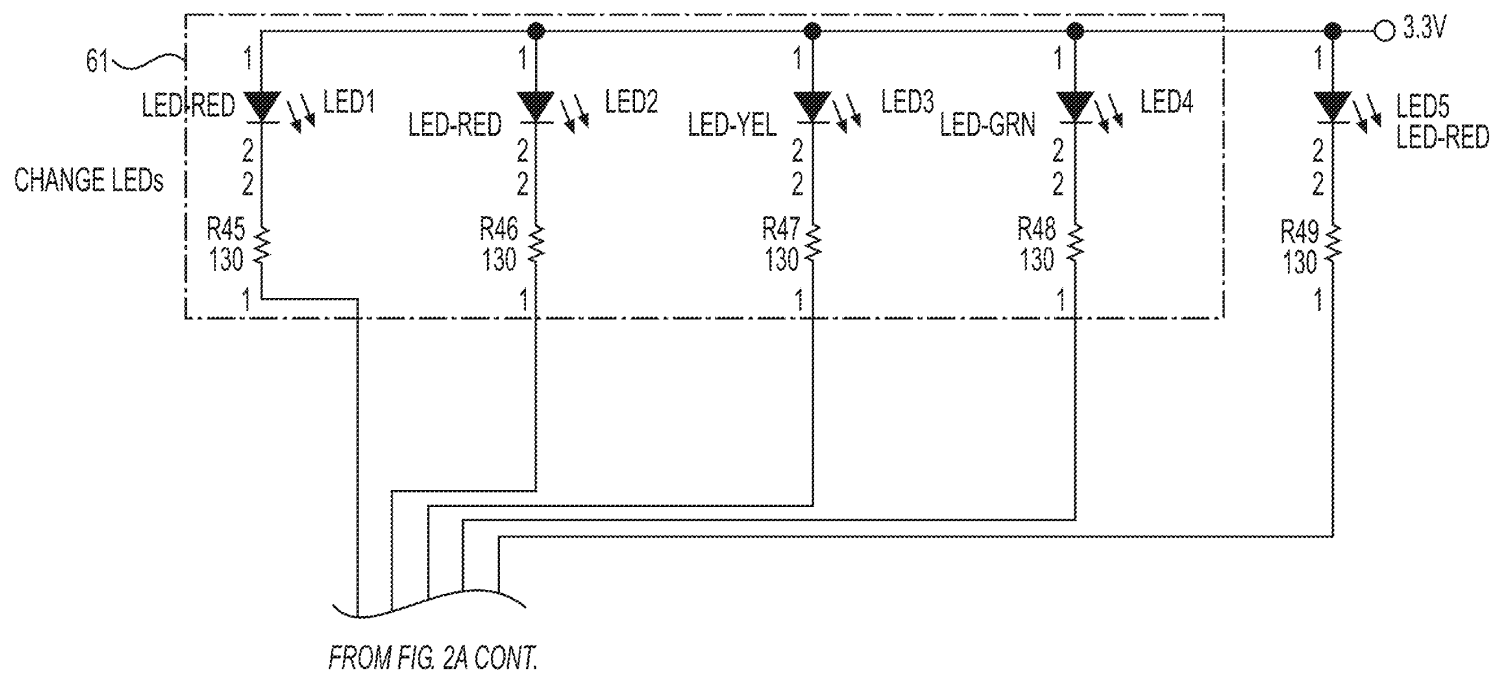



FIG. 2A CONT.



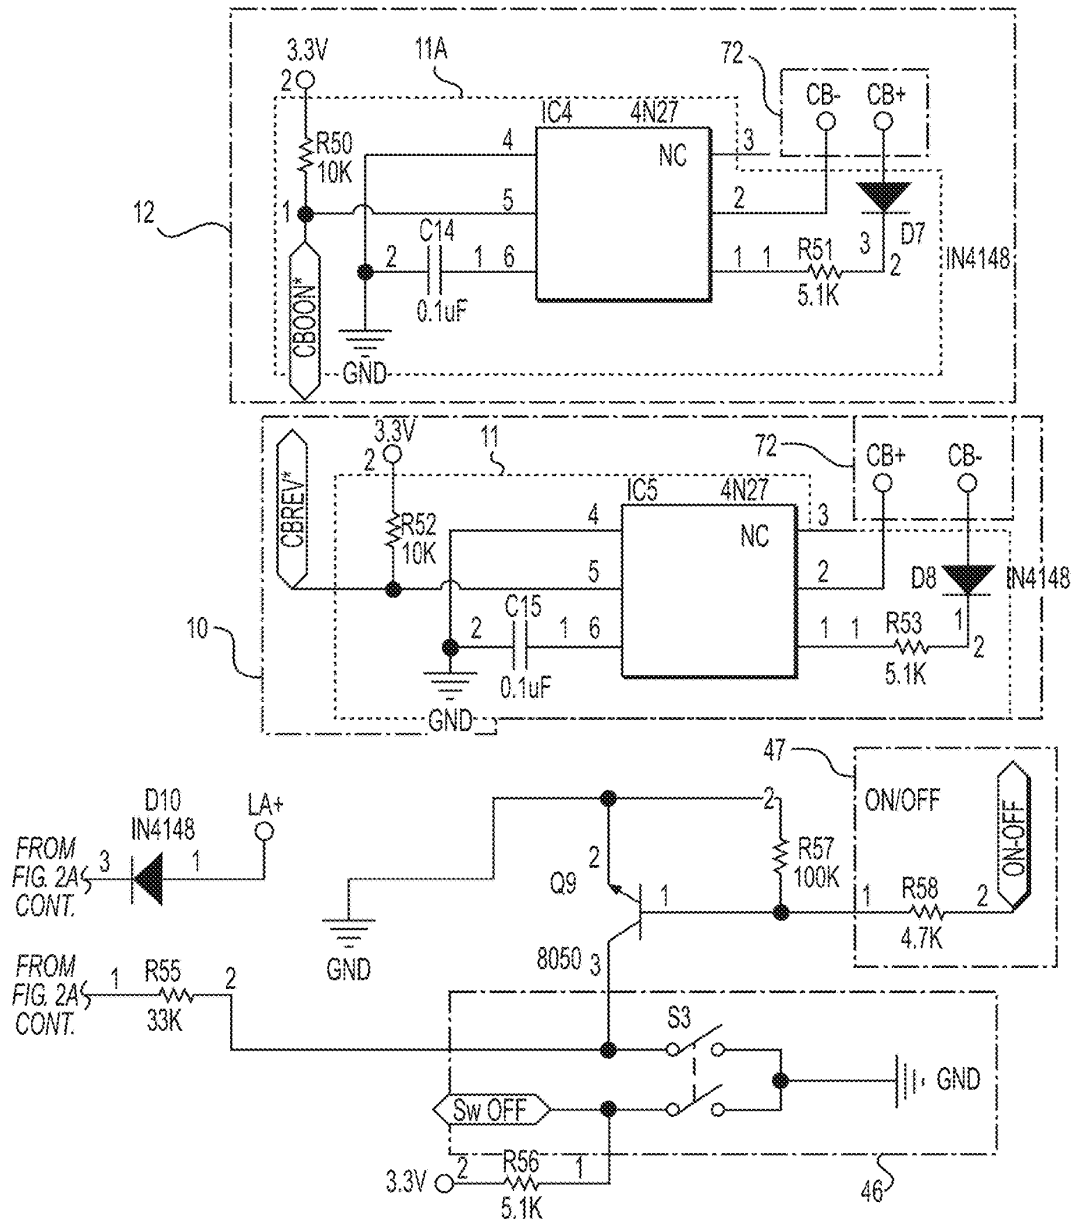



FIG. 2A CONT.



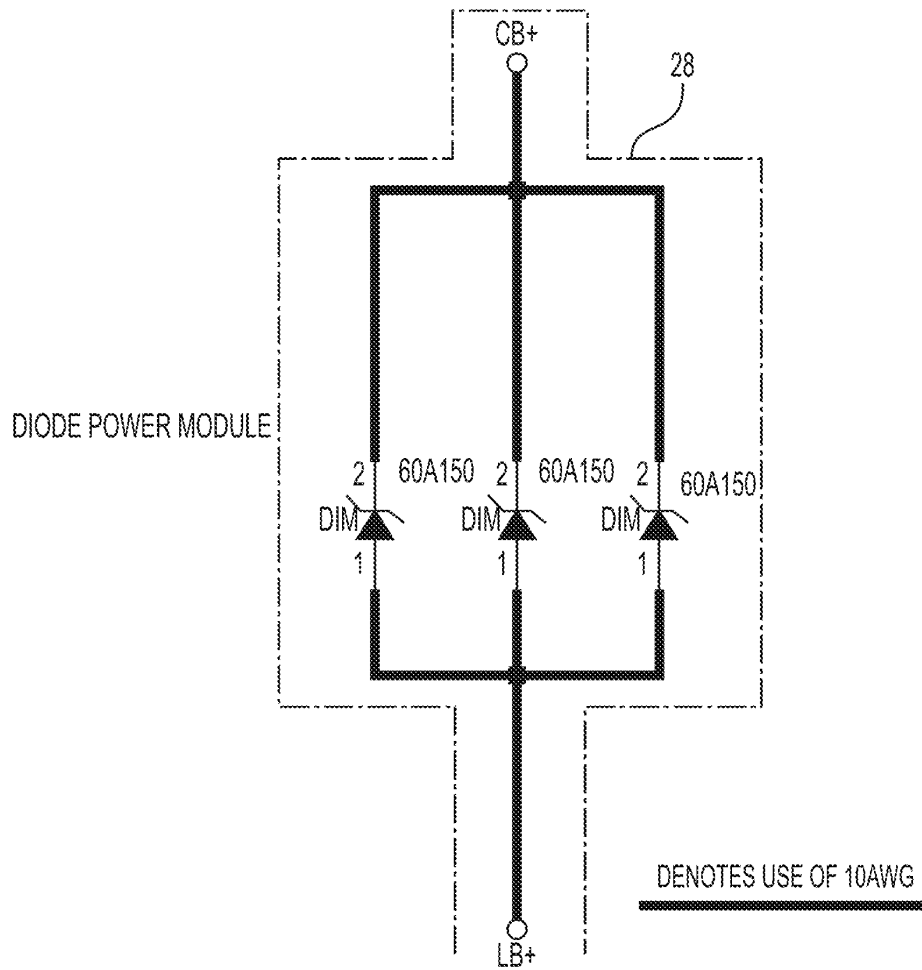



FIG. 2B



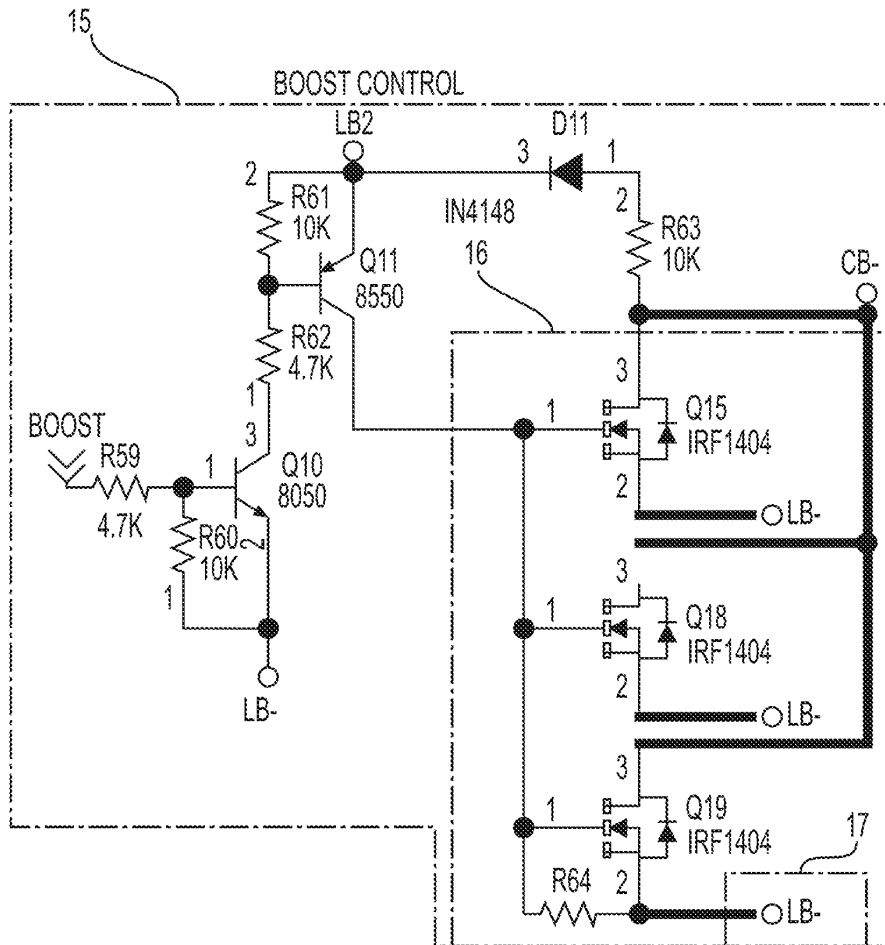



FIG. 2B CONT.



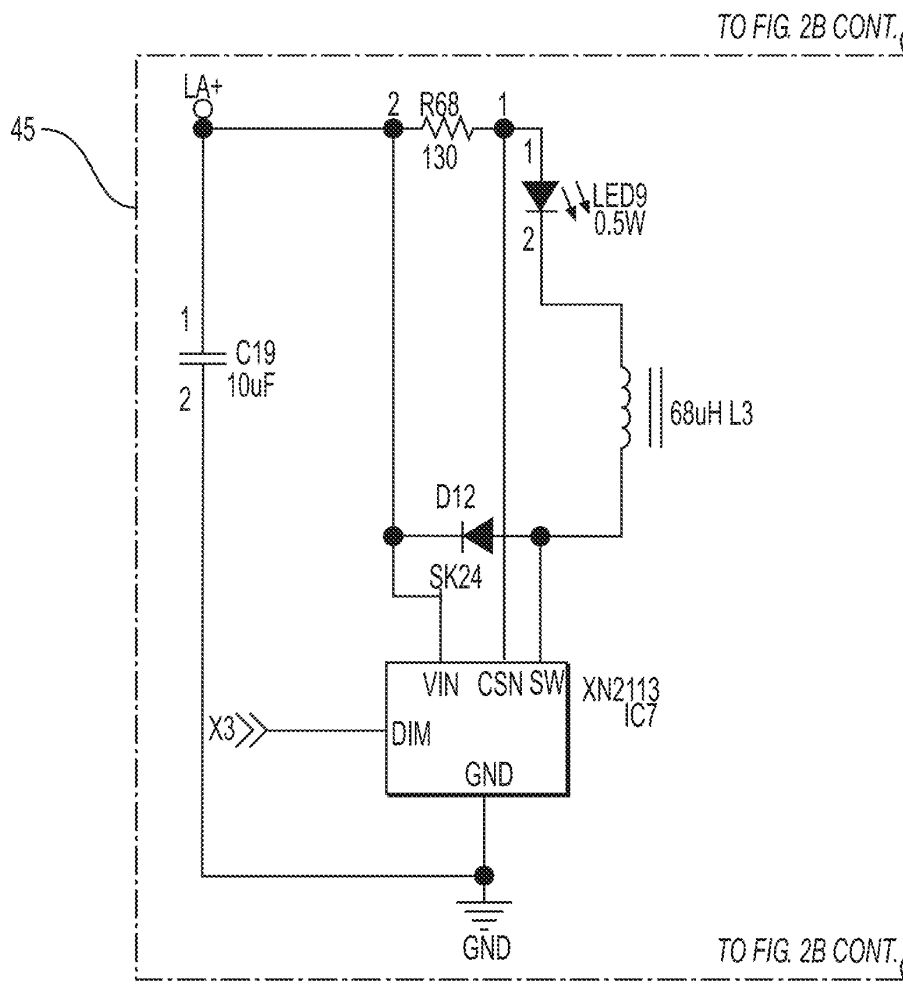

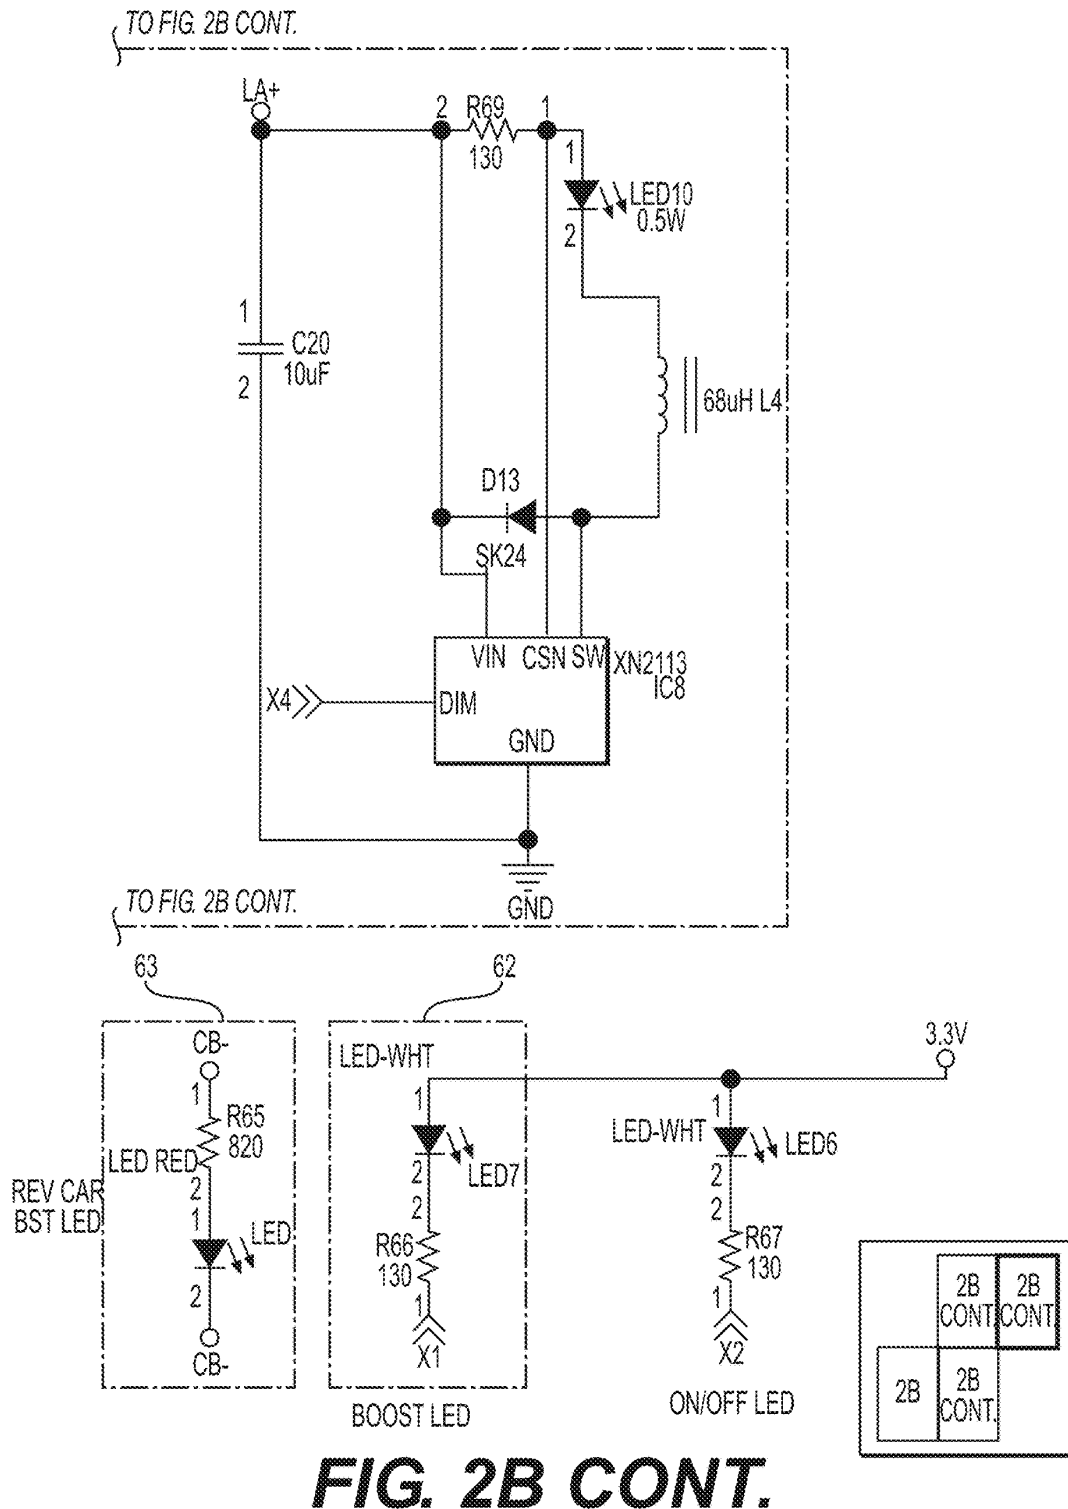


FIG. 2B CONT.





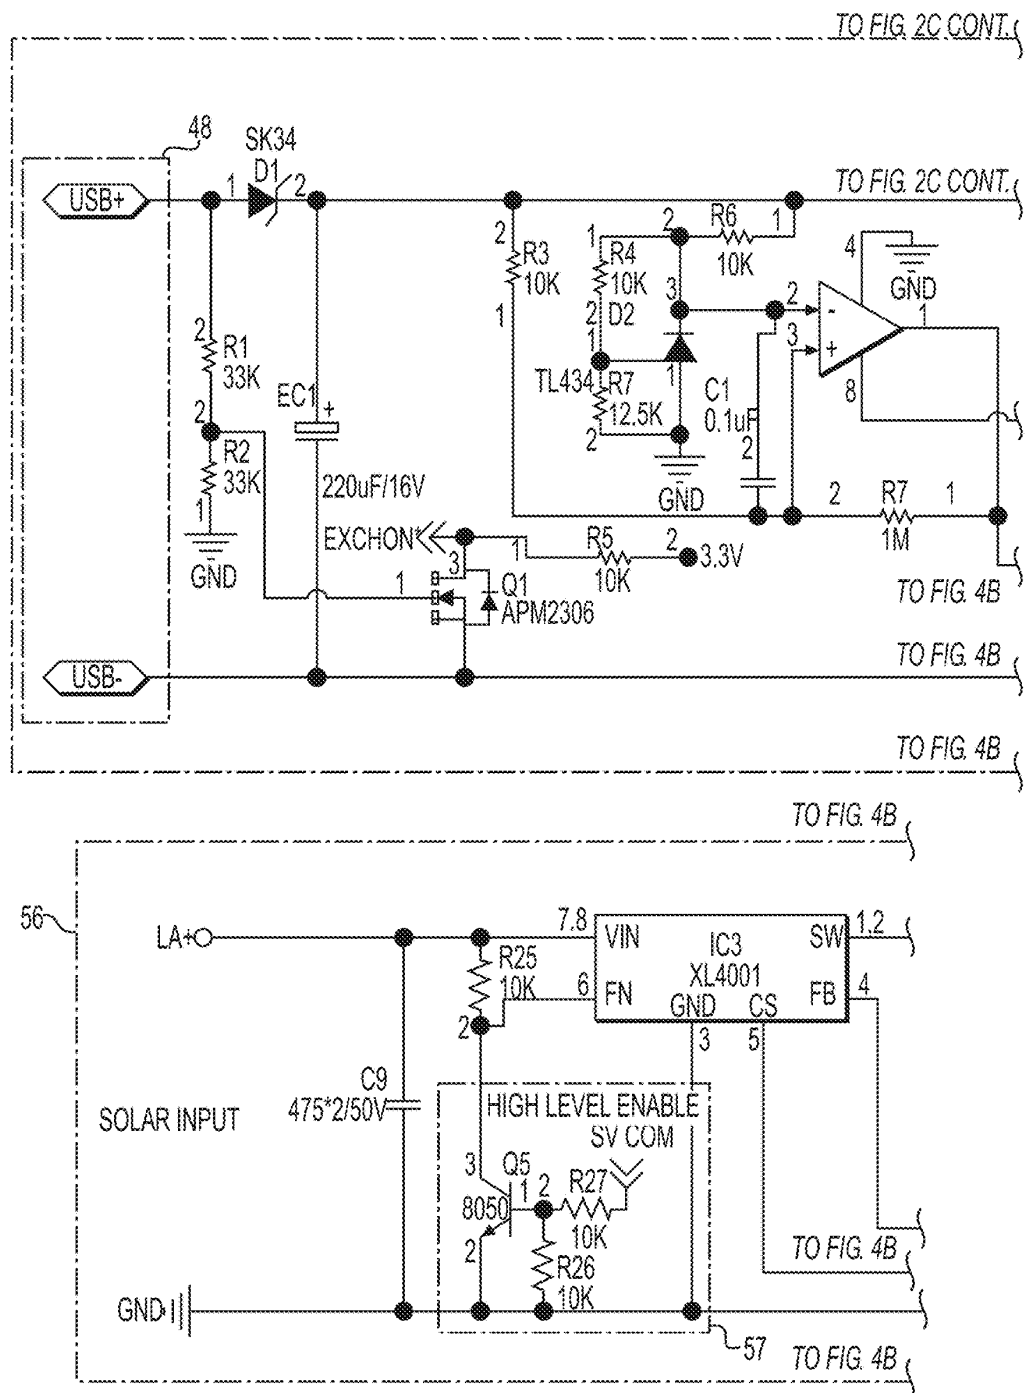
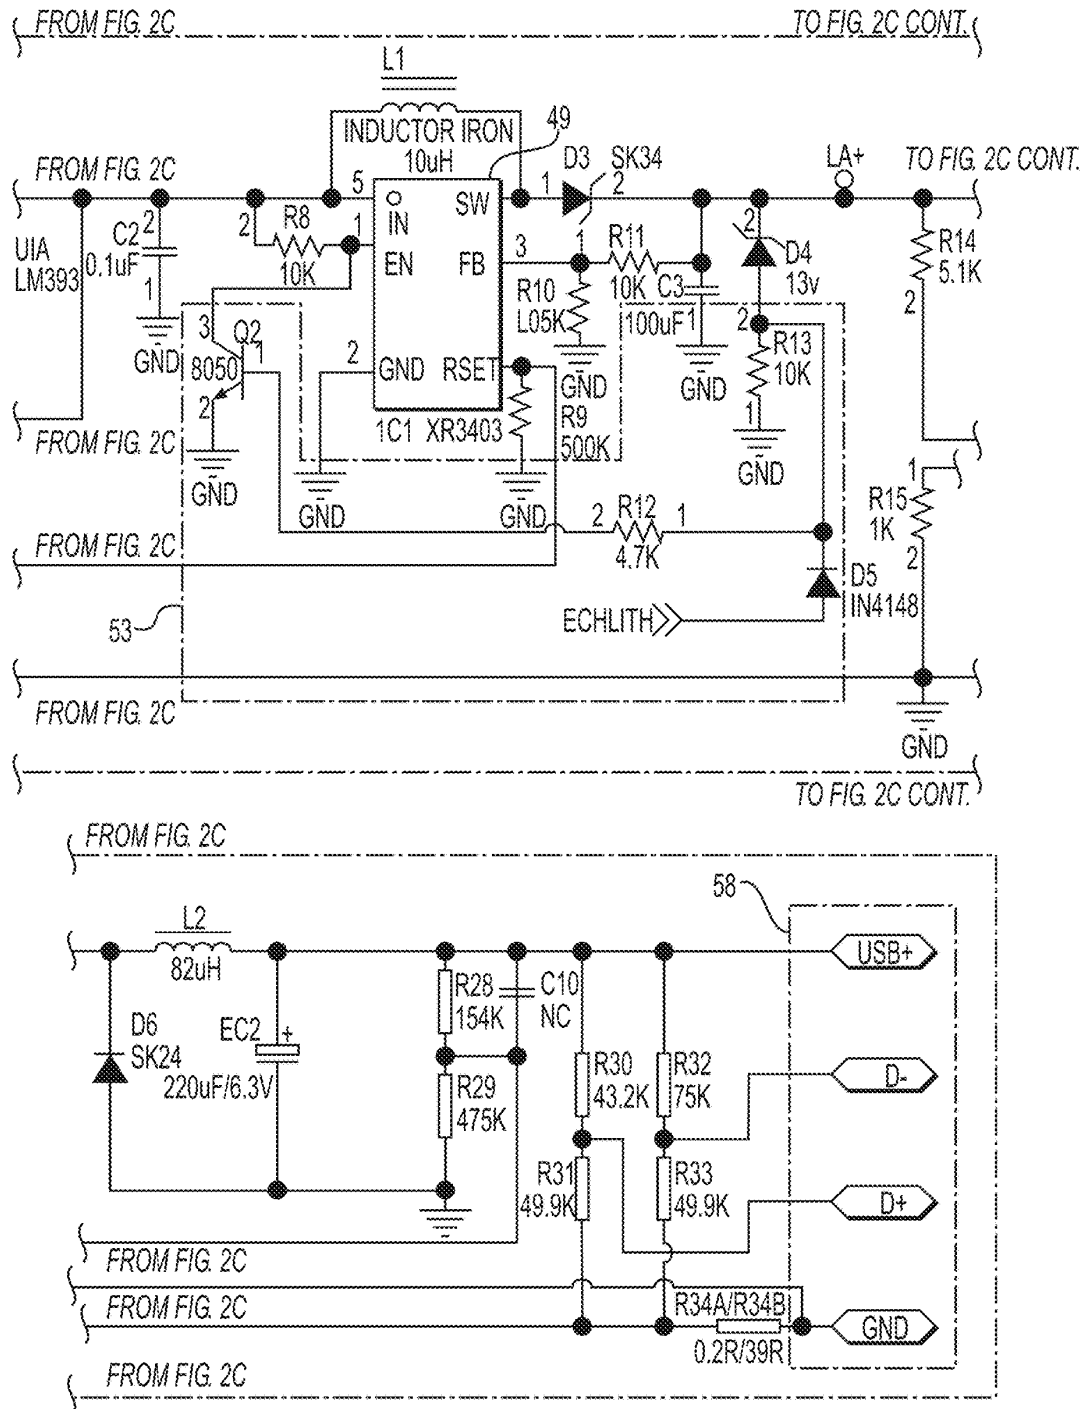

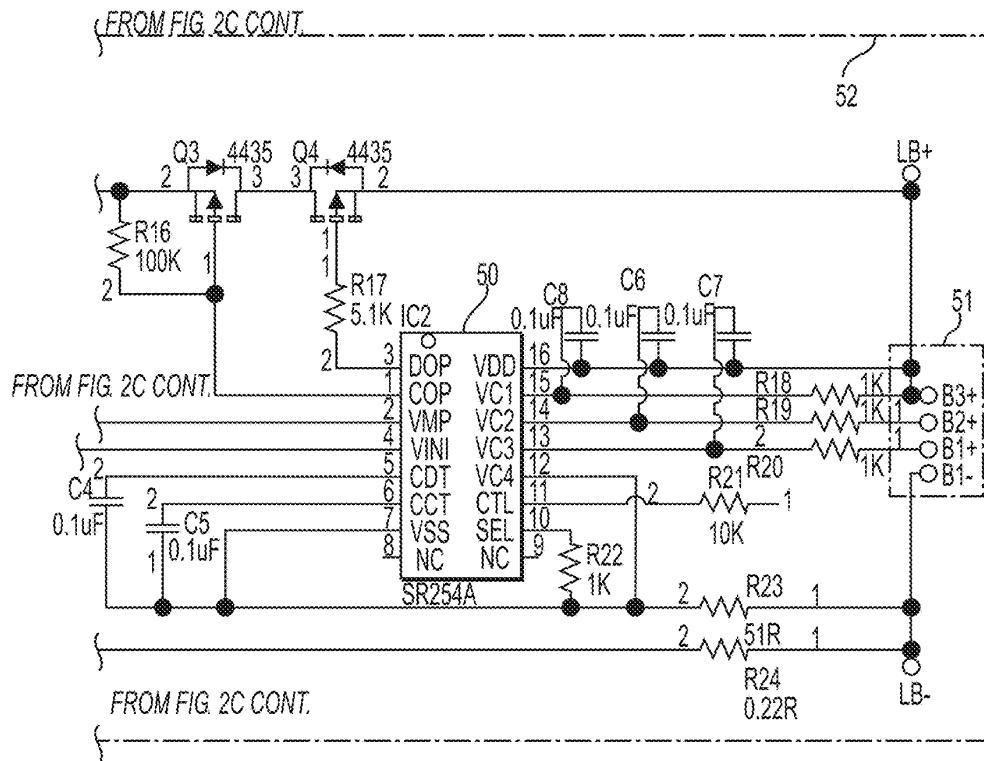



FIG. 2C

2C	2C	2C
	CONT.	CONT.

**FIG. 2C CONT.**

**FIG. 2C CONT.**

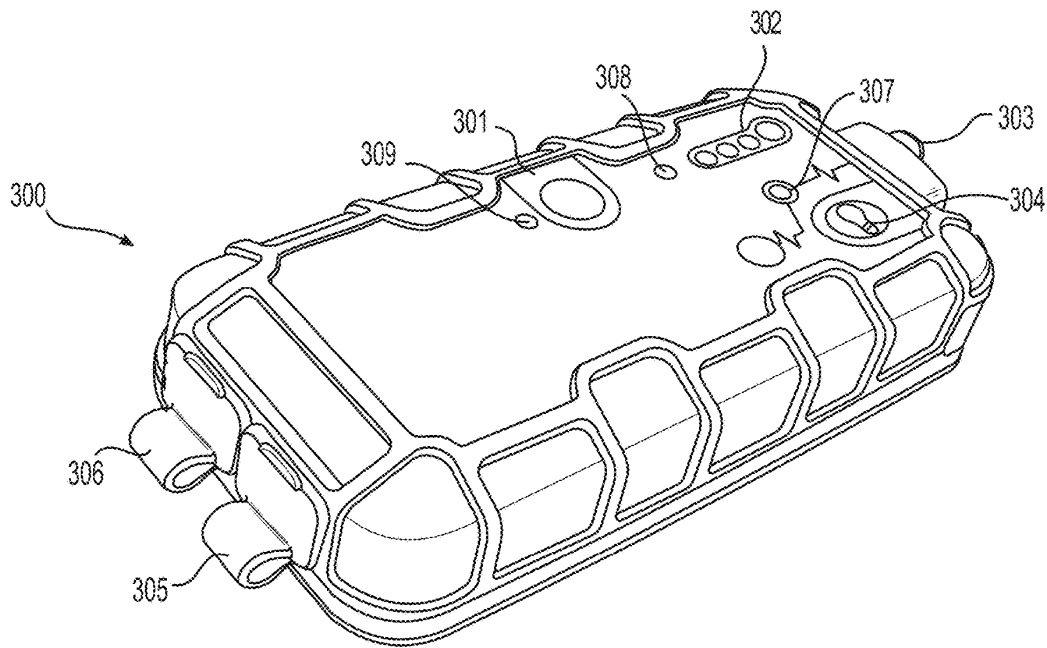


FIG. 3

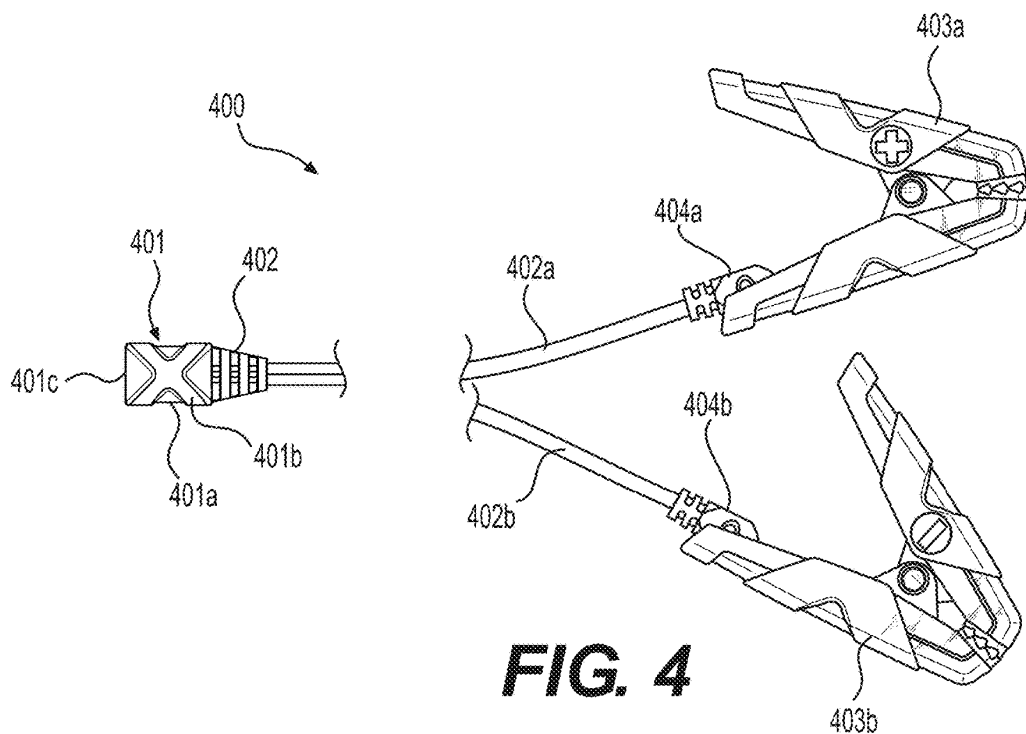


FIG. 4

1

PORTABLE VEHICLE BATTERY JUMP START APPARATUS WITH SAFETY PROTECTION

FIELD OF THE INVENTION

The present invention relates generally to apparatus for jump-starting a vehicle having a depleted or discharged battery.

BACKGROUND TO THE INVENTION

Prior art devices are known for jump-starting a vehicle, which provide either a pair of electrical connector cables that connect a fully-charged battery of another vehicle to the engine start circuit of the dead battery vehicle, or portable booster devices which include a fully-charged battery which can be connected in circuit with the vehicle's engine starter through a pair of cables.

Problems with the prior art arose when either the jumper terminals or clamps of the cables were inadvertently brought into contact with each other while the other ends were connected to a charged battery, or when the positive and negative terminals were connected to the opposite polarity terminals in the vehicle to be jumped, thereby causing a short circuit resulting in sparking and potential damage to batteries and/or bodily injury.

Various attempts to eliminate these problems have been made in the prior art. U.S. Pat. No. 6,212,054 issued Apr. 3, 2001, discloses a battery booster pack that is polarity sensitive and can detect proper and improper connections before providing a path for electric current flow. The device uses a set of LEDs connected to optical couplers oriented by a control circuit. The control circuit controls a solenoid assembly controlling the path of power current. The control circuit causes power current to flow through the solenoid assembly only if the points of contact of booster cable clamp connections have been properly made.

U.S. Pat. No. 6,632,103 issued Oct. 14, 2003, discloses an adaptive booster cable connected with two pairs of clips, wherein the two pairs of clips are respectively attached to two batteries to transmit power from one battery to the other battery. The adaptive booster cable includes a polarity detecting unit connected to each clip, a switching unit and a current detecting unit both provided between the two pairs of clips. After the polarity of each clip is sensed by the polarity detecting unit, the switching unit generates a proper connection between the two batteries. Therefore, the positive and negative terminals of the two batteries are correctly connected based on the detected result of the polarity detecting unit.

U.S. Pat. No. 8,493,021 issued Jul. 23, 2013, discloses apparatus that monitors the voltage of the battery of a vehicle to be jump started and the current delivered by the jump starter batteries to determine if a proper connection has been established and to provide fault monitoring. Only if the proper polarity is detected can the system operate. The voltage is monitored to determine open circuit, disconnected conductive clamps, shunt cable fault, and solenoid fault conditions. The current through the shunt cable is monitored to determine if there is a battery explosion risk, and for excessive current conditions presenting an overheating condition, which may result in fire. The system includes an internal battery to provide the power to the battery of the vehicle to be jump started. Once the vehicle is started, the unit automatically electrically disconnects from the vehicle's battery.

2

U.S. Pat. No. 5,189,359 issued Feb. 23, 1993, discloses a jumper cable device having two bridge rectifiers for developing a reference voltage, a four-input decoder for determining which terminals are to be connected based on a comparison of the voltage at each of the four terminals to the reference voltage, and a pair of relays for effecting the correct connection depending on the determination of the decoder. No connection will be made unless only one terminal of each battery has a higher voltage than the reference voltage, indicating "positive" terminals, and one has a lower voltage than the reference voltage, indicating "negative" terminals, and that, therefore, the two high voltage terminals may be connected and the two lower voltage terminals may be connected. Current flows once the appropriate relay device is closed. The relay device is preferably a MOSFET combined with a series array of photodiodes that develop MOSFET gate-closing potential when the decoder output causes an LED to light.

U.S. Pat. No. 5,795,182 issued Aug. 18, 1998, discloses a polarity independent set of battery jumper cables for jumping a first battery to a second battery. The apparatus includes a relative polarity detector for detecting whether two batteries are configured cross or parallel. A three-position high current capacity crossbar pivot switch is responsive to the relative polarity detector for automatically connecting the plus terminals of the two batteries together and the minus terminals of the two batteries together regardless of whether the configuration detected is cross or parallel, and an under-current detector and a delay circuit for returning the device to its ready and unconnected state after the device has been disconnected from one of the batteries. The crossbar pivot switch includes two pairs of contacts, and a pivot arm that pivots about two separate points to ensure full electrical contact between the pairs of contacts. The invention can also be used to produce a battery charger that may be connected to a battery without regard to the polarity of the battery.

U.S. Pat. No. 6,262,492 issued Jul. 17, 2001, discloses a car battery jumper cable for accurately coupling an effective power source to a failed or not charged battery, which includes a relay switching circuit connected to the power source and the battery by two current conductor pairs. First and second voltage polarity recognition circuits are respectively connected to the power source and the battery by a respective voltage conductor pair to recognize the polarity of the power source and the battery. A logic recognition circuit produces a control signal subject to the polarity of the power source and the battery, and a driving circuit controlled by the control signal from the logic recognition circuit drives the relay switching circuit, enabling the two poles of the power source to be accurately coupled to the two poles of the battery.

U.S. Pat. No. 5,635,817 issued Jun. 3, 1997, discloses a vehicle battery charging device that includes a control housing having cables including a current limiting device to prevent exceeding of a predetermined maximum charging current of about 40 to 60 amps. The control housing includes a polarity detecting device to verify the correct polarity of the connection of the terminals of the two batteries and to electrically disconnect the two batteries if there is an incorrect polarity.

U.S. Pat. No. 8,199,024 issued Jun. 12, 2012, discloses a safety circuit in a low-voltage connecting system that leaves the two low-voltage systems disconnected until it determines that it is safe to make a connection. When the safety circuit determines that no unsafe conditions exist and that it is safe to connect the two low-voltage systems, the safety circuit may connect the two systems by way of a "soft start"

3

that provides a connection between the two systems over a period of time that reduces or prevents inductive voltage spikes on one or more of the low-voltage systems. When one of the low-voltage systems has a completely-discharged battery incorporated into it, a method is used for detection of proper polarity of the connections between the low-voltage systems. The polarity of the discharged battery is determined by passing one or more test currents through it and determining whether a corresponding voltage rise is observed.

U.S. Pat. No. 5,793,185 issued Aug. 11, 1998, discloses a hand-held jump starter having control components and circuits to prevent overcharging and incorrect connection to batteries.

While the prior art attempted solutions to the abovementioned problems as discussed above, each of the prior art solutions suffers from other shortcomings, either in complexity, cost or potential for malfunction. Accordingly, there exists a need in the art for further improvements to vehicle jump start devices.

SUMMARY OF THE INVENTION

In accordance with an aspect of the invention, an apparatus is provided for jump starting a vehicle engine, comprising: an internal power supply; an output port having positive and negative polarity outputs; a vehicle battery isolation sensor connected in circuit with said positive and negative polarity outputs, configured to detect presence of a vehicle battery connected between said positive and negative polarity outputs; a reverse polarity sensor connected in circuit with said positive and negative polarity outputs, configured to detect polarity of a vehicle battery connected between said positive and negative polarity outputs and to provide an output signal indicating whether positive and negative terminals of said vehicle battery are properly connected with said positive and negative polarity outputs of said output port; a power switch connected between said internal power supply and said output port; and a microcontroller configured to receive input signals from said vehicle isolation sensor and said reverse polarity sensor, and to provide an output signal to said power switch, such that said power switch is turned on to cause said internal power supply to be connected to said output port in response to signals from said sensors indicating the presence of a vehicle battery at said output port and proper polarity connection of positive and negative terminals of said vehicle battery with said positive and negative polarity outputs, and is not turned on when signals from said sensors indicate either the absence of a vehicle battery at said output port or improper polarity connection of positive and negative terminals of said vehicle battery with said positive and negative polarity outputs.

In accordance with an embodiment of the invention, the internal power supply is a rechargeable lithium ion battery pack.

A jumper cable device may also be provided, having a plug configured to plug into said output port; a pair of cables integrated with the plug at one respective end thereof; said pair of cables being configured to be separately connected to terminals of a battery at another respective end thereof.

Comprises/comprising and grammatical variations thereof when used in this specification are to be taken to specify the presence of stated features, integers, steps or components or groups thereof, but do not preclude the

4

presence or addition of one or more other features, integers, steps, components or groups thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a functional block diagram of a handheld vehicle battery boost apparatus in accordance with one aspect of the present invention;

FIGS. 2A-2C are schematic circuit diagrams of an example embodiment of a handheld vehicle battery boost apparatus in accordance with an aspect of the invention;

FIG. 3 is a perspective view of a handheld jump starter booster device in accordance with one example embodiment of the invention; and

FIG. 4 is a plan view of a jumper cable usable with the handheld jump starter booster device in accordance with another aspect of the invention.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a functional block diagram of a handheld battery booster according to one aspect of the invention. At the heart of the handheld battery booster is a lithium polymer battery pack 32, which stores sufficient energy to jump start a vehicle engine served by a conventional 12 volt lead-acid or valve regulated lead-acid battery. In one example embodiment, a high-surge lithium polymer battery pack includes three 3.7V, 2666 mAh lithium polymer batteries in a 3S1P configuration. The resulting battery pack provides 11.1V, 2666 Ah (8000 Ah at 3.7V, 29.6 Wh). Continuous discharge current is 25 C (or 200 amps), and burst discharge current is 50 C (or 400 amps). The maximum charging current of the battery pack is 8000 mA (8 amps).

A programmable microcontroller unit (MCU) 1 receives various inputs and produces informational as well as control outputs. The programmable MCU 1 further provides flexibility to the system by allowing updates in functionality and system parameters, without requiring any change in hardware. According to one example embodiment, an 8 bit microcontroller with 2K×15 bits of flash memory is used to control the system. One such microcontroller is the HT67F30, which is commercially available from Holtek Semiconductor Inc.

A car battery reverse sensor 10 monitors the polarity of the vehicle battery 72 when the handheld battery booster device is connected to the vehicle's electric system. As explained below, the booster device prevents the lithium battery pack from being connected to the vehicle battery 72 when the terminals of the battery 72 are connected to the wrong terminals of the booster device. A car battery isolation sensor 12 detects whether or not a vehicle battery 72 is connected to the booster device, and prevents the lithium battery pack from being connected to the output terminals of the booster device unless there is a good (e.g. chargeable) battery connected to the output terminals.

A smart switch FET circuit 15 electrically switches the handheld battery booster lithium battery to the vehicle's electric system only when the vehicle battery is determined by the MCU 1 to be present (in response to a detection signal provided by isolation sensor 12) and connected with the correct polarity (in response to a detection signal provided by reverse sensor 10). A lithium battery temperature sensor 20 monitors the temperature of the lithium battery pack 32 to detect overheating due to high ambient temperature conditions and overextended current draw during jump starting. A lithium battery voltage measurement circuit 24

5

monitors the voltage of the lithium battery pack 32 to prevent the voltage potential from rising too high during a charging operation and from dropping too low during a discharge operation.

Lithium battery back-charge protection diodes 28 prevent any charge current being delivered to the vehicle battery 72 from flowing back to the lithium battery pack 32 from the vehicle's electrical system. Flashlight LED circuit 36 is provided to furnish a flashlight function for enhancing light under a vehicle's hood in dark conditions, as well as providing SOS and strobe lighting functions for safety purposes when a vehicle may be disabled in a potentially dangerous location. Voltage regulator 42 provides regulation of internal operating voltage for the microcontroller and sensors. On/Off manual mode and flashlight switches 46 allow the user to control power-on for the handheld battery booster device, to control manual override operation if the vehicle has no battery, and to control the flashlight function. The manual button functions only when the booster device is powered on. This button allows the user to jump-start vehicles that have either a missing battery, or the battery voltage is so low that automatic detection by the MCU is not possible. When the user presses and holds the manual override button for a predetermined period time (such as three seconds) to prevent inadvertent actuation of the manual mode, the internal lithium ion battery power is switched to the vehicle battery connect port. The only exception to the manual override is if the car battery is connected in reverse. If the car battery is connected in reverse, the internal lithium battery power shall never be switched to the vehicle battery connect port.

USB charge circuit 52 converts power from any USB charger power source, to charge voltage and current for charging the lithium battery pack 32. USB output 56 provides a USB portable charger for charging smartphones, tablets, and other rechargeable electronic devices. Operation indicator LEDs 60 provide visual indication of lithium battery capacity status as well as an indication of smart switch activation status (indicating that power is being provided to the vehicle's electrical system).

Detailed operation of the handheld booster device will now be described with reference to the schematic diagrams of FIGS. 2A-2C. As shown in FIG. 2A, the microcontroller unit 1 is the center of all inputs and outputs. The reverse battery sensor 10 comprises an optically coupled isolator phototransistor (4N27) connected to the terminals of vehicle battery 72 at input pins 1 and 2 with a diode D8 in the lead conductor of pin 1 (associated with the negative terminal CB-), such that if the battery 72 is connected to the terminals of the booster device with the correct polarity, the optocoupler LED 11 will not conduct current, and is therefore turned off, providing a "1" or high output signal to the MCU 1. The car battery isolation sensor 12 comprises an optically coupled isolator phototransistor (4N27) connected to the terminals of vehicle battery 72 at input pins 1 and 2 with a diode D7 in the lead conductor of pin 1 (associated with the positive terminal CB+), such that if the battery 72 is connected to the terminals of the booster device with the correct polarity, the optocoupler LED 11A will conduct current, and is therefore turned on, providing a "0" or low output signal to the MCU, indicating the presence of a battery across the jumper output terminals of the handheld booster device.

If the car battery 72 is connected to the handheld booster device with reverse polarity, the optocoupler LED 11 of the reverse sensor 10 will conduct current, providing a "0" or low signal to microcontroller unit 1. Further, if no battery is

6

connected to the handheld booster device, the optocoupler LED 11A of the isolation sensor 12 will not conduct current, and is therefore turned off, providing a "1" or high output signal to the MCU, indicating the absence of any battery connected to the handheld booster device. Using these specific inputs, the microcontroller software of MCU 1 can determine when it is safe to turn on the smart switch FET 15, thereby connecting the lithium battery pack to the jumper terminals of the booster device. Consequently, if the car battery 72 either is not connected to the booster device at all, or is connected with reverse polarity, the MCU 1 can keep the smart switch FET 15 from being turned on, thus prevent sparking/short circuiting of the lithium battery pack.

As shown in FIG. 2B, the FET smart switch 15 is driven by an output of the microcontroller 1. The FET smart switch 15 includes three FETs (Q15, Q18, and Q19) in parallel, which spreads the distribution of power from the lithium battery pack over the FETs. When that microcontroller output is driven to a logic low, FETs 16 are all in a high resistance state, therefore not allowing current to flow from the internal lithium battery negative contact 17 to the car battery 72 negative contact. When the microcontroller output is driven to a logic high, the FETs 16 (Q15, Q18, and Q19) are in a low resistant state, allowing current to flow freely from the internal lithium battery pack negative contact 17 (LB-) to the car battery 72 negative contact (CB-). In this way, the microcontroller software controls the connection of the internal lithium battery pack 32 to the vehicle battery 72 for jumpstarting the car engine.

Referring back to FIG. 2A, the internal lithium battery pack voltage can be accurately measured using circuit 24 and one of the analog-to-digital inputs of the microcontroller 1. Circuit 24 is designed to sense when the main 3.3V regulator 42 voltage is on, and to turn on transistor 23 when the voltage of regulator 42 is on. When transistor 23 is conducting, it turns on FET 22, thereby providing positive contact (LB+) of the internal lithium battery a conductive path to voltage divider 21 allowing a lower voltage range to be brought to the microcontroller to be read. Using this input, the microcontroller software can determine if the lithium battery voltage is too low during discharge operation or too high during charge operation, and take appropriate action to prevent damage to electronic components.

Still referring to FIG. 2A, the temperature of the internal lithium battery pack 32 can be accurately measured by two negative temperature coefficient (NTC) devices 20. These are devices that reduce their resistance when their temperature rises. The circuit is a voltage divider that brings the result to two analog-to-digital (A/D) inputs on the microcontroller 1. The microcontroller software can then determine when the internal lithium battery is too hot to allow jumpstarting, adding safety to the design.

The main voltage regulator circuit 42 is designed to convert internal lithium battery voltage to a regulated 3.3 volts that is utilized by the microcontroller 1 as well as by other components of the booster device for internal operating power. Three lithium battery back charge protection diodes 28 (see FIG. 2B) are in place to allow current to flow only from the internal lithium battery pack 32 to the car battery 72, and not from the car battery to the internal lithium battery. In this way, if the car electrical system is charging from its alternator, it cannot back-charge (and thereby damage) the internal lithium battery, providing another level of safety.

The main power on switch 46 (FIG. 2A) is a combination that allows for double pole, double throw operation so that with one push, the product can be turned on if it is in the off

7

state, or turned off if it is in the on state. This circuit also uses a microcontroller output 47 to “keep alive” the power when it is activated by the on switch. When the switch is pressed the microcontroller turns this output to a high logic level to keep power on when the switch is released. In this way, the microcontroller maintains control of when the power is turned off when the on/off switch is activated again or when the lithium battery voltage is getting too low. The microcontroller software also includes a timer that turns the power off after a predefined period of time, (such as, e.g. 8 hours) if not used.

The flashlight LED circuit 45 shown in FIG. 2B controls the operation of flashlight LEDs. Two outputs from the microcontroller 1 are dedicated to two separate LEDs. Thus, the LEDs can be independently software-controlled for strobe and SOS patterns, providing yet another safety feature to the booster device. LED indicators provide the feedback the operator needs to understand what is happening with the product. Four separate LEDs 61 (FIG. 2A) are controlled by corresponding individual outputs of microcontroller 1 to provide indication of the remaining capacity of the internal lithium battery. These LEDs are controlled in a “fuel gauge” type format with 25%, 50%, 75% and 100% (red, red, yellow, green) capacity indications. An LED indicator 63 (FIG. 2B) provides a visual warning to the user when the vehicle battery 72 has been connected in reverse polarity. “Boost” and on/off LEDs 62 provide visual indications when the booster device is provide jump-start power, and when the booster device is turned on, respectively.

A USB output 56 circuit (FIG. 2C) is included to provide a USB output for charging portable electronic devices such as smartphones from the internal lithium battery pack 32. Control circuit 57 from the microcontroller 1 allows the USB Out 56 to be turned on and off by software control to prevent the internal lithium battery getting too low in capacity. The USB output is brought to the outside of the device on a standard USB connector 58, which includes the standard voltage divider required for enabling charge to certain smartphones that require it.

The USB charge circuit 52 allows the internal lithium battery pack 32 to be charged using a standard USB charger. This charge input uses a standard micro-USB connector 48 allowing standard cables to be used. The 5V potential provided from standard USB chargers is up-converted to the 12.4 VDC voltage required for charging the internal lithium battery pack using a DC-DC converter 49. The DC-DC converter 49 can be turned on and off via circuit 53 by an output from the microcontroller 1.

In this way, the microcontroller software can turn the charge off if the battery voltage is measured to be too high by the A/D input 22. Additional safety is provided for helping to eliminate overcharge to the internal lithium battery using a lithium battery charge controller 50 that provides charge balance to the internal lithium battery cells 51. This controller also provides safety redundancy for eliminating over discharge of the internal lithium battery.

FIG. 3 is a perspective view of a handheld device 300 in accordance with an exemplary embodiment of the invention. 301 is a power on switch. 302 shows the LED “fuel gauge” indicators 61. 303 shows a 12 volt output port connectable to a cable device 400, described further below. 304 shows a flashlight control switch for activating flashlight LEDs 45. 305 is a USB input port for charging the internal lithium battery, and 306 is a USB output port for providing charge from the lithium battery to other portable devices such as smartphones, tablets, music players, etc. 307 is a “boost on” indicator showing that power is being provided to the 12V

8

output port. 308 is a “reverse” indicator showing that the vehicle battery is improperly connected with respect to polarity. 309 is a “power on” indicator showing that the device is powered up for operation.

FIG. 4 shows a jumper cable device 400 specifically designed for use with the handheld device 300. Device 400 has a plug 401 configured to plug into 12 volt output port 303 of the handheld device 300. A pair of cables 402a and 402b are integrated with the plug 401, and are respectively connected to battery terminal clamps 403a and 403b via ring terminals 404a and 404b. The port 303 and plug 401 may be dimensioned so that the plug 401 will only fit into the port 303 in a specific orientation, thus ensuring that clamp 403a will correspond to positive polarity, and clamp 403b will correspond to negative polarity, as indicated thereon. Additionally, the ring terminals 404a and 404b may be disconnected from the clamps and connected directly to the terminals of a vehicle battery. This feature may be useful, for example, to permanently attach the cables 302a-302b to the battery of a vehicle. In the event that the battery voltage becomes depleted, the handheld booster device 300 could be properly connected to the battery very simply by plugging in the plug 401 to the port 303.

The invention having been thus described, it will be apparent to those skilled in the art that the same may be varied in many ways without departing from the spirit or scope of the invention. Any and all such variations are intended to be encompassed within the scope of the following claims.

The invention claimed is:

1. A jump starter apparatus for jump starting a vehicle battery, comprising:

- a power supply that includes one or more rechargeable batteries;
 - a USB port configured to receive power from an external power source for charging the one or more batteries;
 - a DC-DC converter coupled between the USB port and the one or more rechargeable batteries and configured to increase a voltage received from the external power source for charging the one or more rechargeable batteries;
 - a vehicle battery isolation sensor configured to detect presence of the vehicle battery connected to the jump starter apparatus;
 - a reverse polarity sensor, separate from the vehicle battery isolation sensor, configured to detect a proper polarity connection between the jump starter apparatus and the vehicle battery; and
 - a power switch configured to electrically connect the power supply to the vehicle battery,
- wherein the power switch is controlled based on signals from the vehicle battery isolation sensor and the reverse polarity sensor such that the power supply is connected to the vehicle battery when both (i) the vehicle battery isolation sensor currently indicates that the vehicle battery is connected to the jump starter apparatus, and (ii) the reverse polarity sensor currently indicates that the jump starter and the vehicle battery are connected with the proper polarity connection.

2. The jump starter apparatus of claim 1, wherein the jump starter apparatus is a hand-held device.

3. The jump starter apparatus of claim 1, further comprising:

- a positive battery terminal connector for electrically connecting the jump starter apparatus to a positive terminal of the vehicle battery; and

9

a negative battery terminal connector for electrically connecting the jump starter apparatus to a negative terminal of the vehicle battery.

4. The jump starter apparatus of claim 1, further comprising:

a controller that receives the signals from the vehicle battery isolation sensor and the reverse polarity sensor and controls the power switch.

5. The jump starter apparatus of claim 4, wherein the controller is configured to automatically cause the vehicle battery isolation sensor to detect presence of the vehicle battery and the reverse polarity sensor to detect polarity of the vehicle battery when the vehicle battery is electrically connected to the jump starter apparatus and the jump starter apparatus becomes operational.

6. The jump starter apparatus of claim 1, wherein the power switch is a FET switch.

7. The jump starter apparatus of claim 1, wherein the reverse polarity sensor comprises an optically coupled isolator phototransistor coupled to a vehicle battery terminal connector via a diode.

10

8. The jump starter apparatus of claim 1, wherein the vehicle battery isolation sensor comprises an optically coupled isolator phototransistor coupled to a vehicle battery terminal connector via a diode.

9. The jump starter apparatus of claim 1, further comprising: a battery charge controller configured to control charging of the one or more rechargeable batteries from the USB port.

10. The jump starter apparatus of claim 9, wherein the jump starter apparatus is further configured to provide power for charging an external device.

11. The jump starter apparatus of claim 10, further comprising:

a USB output port for providing power from the rechargeable power supply for charging the external device.

* * * * *