

Electronic Filing System (EFS) Data
Electronic Patent Application Submission
USPTO Use Only



EFS ID: 60235

Application ID: 60521466



Title of Invention: VACUUM CLEANER WITH MULTIPLE
CYCLONIC DIRT SEPARATORS AND
BOTTOM DISCHARGE DIRT CUP

First Named Inventor: Joseph Fester

Domestic/Foreign Application: Domestic Application

Filing Date: 2004-04-30

Effective Receipt Date: 2004-04-30

Submission Type: Provisional Application

Filing Type: new-utility

Confirmation number: 1466

Attorney Docket Number: 71189-1621

Total Fees Authorized: 160.0

Payment Category: Deposit Account

Deposit Account Number: 502003

Deposit Account Name: John E. McGarry

RAM Payment Status: RAM has not been processed

Digital Certificate Holder: cn=John E. McGarry,ou=Registered Attorneys,ou=Patent and Trademark
Office,ou=Department of Commerce,o=U.S. Government,c=US

Certificate Message Digest: 5223be09f2408438070c3f8836a997a1580343e9

TRANSMITTAL

Electronic Version v1.1
 Stylesheet Version v1.1.0

16800 U.S. PTO
 60/521466



Title of Invention

VACUUM CLEANER WITH MULTIPLE CYCLONIC DIRT SEPARATORS AND
 BOTTOM DISCHARGE DIRT CUP

Application Number:

Date:

First Named Applicant: Joseph A. Fester

Confirmation Number:

Attorney Docket Number: 71189-1621

I hereby certify that the use of this system is for OFFICIAL correspondence between patent applicants or their representatives and the USPTO. Fraudulent or other use besides the filing of official correspondence by authorized parties is strictly prohibited, and subject to a fine and/or imprisonment under applicable law.

I, the undersigned, certify that I have viewed a display of document(s) being electronically submitted to the United States Patent and Trademark Office, using either the USPTO provided style sheet or software, and that this is the document(s) I intend for initiation or further prosecution of a patent application noted in the submission. This document(s) will become part of the official electronic record at the USPTO.

Submitted by:	Elec. Sign.	Sign. Capacity
John E. McGarry Registered Number: 22,360	/s/ John E. McGarry	Attorney

Documents being submitted

us-request

Files

71189-1621-usrequ.xml

us-request.dtd

us-request.xml

us-fee-sheet

71189-1621-usfees.xml

us-fee-sheet.xml

us-fee-sheet.dtd

application-body

SPEC.xml

application-body.dtd

wipo.ent

mathml2.dtd

mathml2-qname-1.mod
isoamsa.ent
isoamsb.ent
isoamsc.ent
isoamsn.ent
isoamso.ent
isoamsr.ent
isogr3.ent
isomfrk.ent
isomopf.ent
isomscr.ent
isotech.ent
isobox.ent
isocyr1.ent
isocyr2.ent
isodia.ent
isolat1.ent
isolat2.ent
isonum.ent
isopub.ent
mmlextra.ent
mmlalias.ent
soextblx.dtd
us-application-body.xsl
Image1.tif
Image2.tif
Image3.tif
Image4.tif
Image5.tif
Image6.tif
Image7.tif
Image8.tif
Image9.tif
Image10.tif

Comments

FEE TRANSMITTAL

Electronic Version v08
 Stylesheet Version v08.0

Title of Invention

VACUUM CLEANER WITH MULTIPLE CYCLONIC DIRT SEPARATORS AND
 BOTTOM DISCHARGE DIRT CUP

Application Number:

Date:

First Named Applicant: Joseph A. Fester

Attorney Docket Number: 71189-1621

TOTAL FEE AUTHORIZED \$160

Patent fees are subject to annual revisions on or about October 1st of each year.

Filing as large entity

BASIC FILING FEE

Fee Description	Fee Code	Amount \$	Fee Paid \$
Provisional Filing Fee	1005	160	160
			Subtotal For Basic Filing Fee: \$160

AUTHORIZED BILLING INFORMATION

The commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit account number: 502003

Deposit name: McGarry Bair PC

Deposit authorized name: John E. McGarry

Signature: /s/ John E. McGarry

Date (YYYYMMDD): 2004-04-30

Charge Any Additional Fee Required Under 37 C.F.R. Sections 1.16 and 1.17.

Description

VACUUM CLEANER WITH MULTIPLE CYCLONIC DIRT SEPARATORS AND BOTTOM DISCHARGE DIRT CUP

FIELD OF THE INVENTION

[0001] The invention relates to suction cleaners, and in particular to a separator for a suction cleaner. In one of its aspects, the invention relates to a separator with a cyclonic airflow path to separate dirt and debris from air drawn into the cleaner. In another of its aspects, the invention relates to a separator that deposits the dirt and debris in a collection receptacle. In another of its aspects, the invention relates to a bottom discharge dirt cup with an integrated filter chamber. In another of its aspects, the invention relates to a separator including structure for inhibiting the re-entrainment of debris that vacillates with upward airflows in the collection receptacle. In another of its aspects, the invention relates to multiple cyclone separators including a single primary cyclone in series with a plurality of secondary cyclones arranged in parallel.

DESCRIPTION OF THE RELATED ART

[0002] Cyclone separators are well known. Some follow the textbook examples using frusto-conical shape separators and others use high-speed rotational motion of the air/dirt to separate the dirt by centrifugal force. Typically, working air enters and exits at an upper portion of the cyclone separator as the bottom portion of the cyclone separator is used to collect debris. Furthermore, in an effort to reduce weight, the motor/fan assembly that creates the working air flow is typically placed at the bottom of the handle, below the cyclone separator. This arrangement therefore, requires a tortuous

air path from the top of the cyclone assembly, down the handle to the inlet of the motor/fan assembly. This creates a long air path with multiple parts which may allow for air leaks and generally negatively impacting airflow and, necessarily, cleaning performance.

- [0003] Conrad et al., in U.S. Patent No. 6,129,775 discloses a cyclone separator with a terminal insert which can take a number of forms. In FIG. 14(d), the terminal insert may comprise a plurality of longitudinally extending members (such as rods), which extend upwardly into the cyclone separator cavity from the bottom surface of the cyclone separator. The rods are said to interact with circulating fluid 48 to disrupt its rotational motion. The rods may be positioned symmetrically non-symmetrically around longitudinal axis of the separator. The rods may be a variety of shapes such as, in transverse section, squares, ellipses or other closed convex or abode shapes. Further, the transverse section of rods may vary longitudinally.
- [0004] BISSELL Homecare, Inc. presently manufactures and sells in the United States an upright vacuum cleaner that has a cyclone separator and a dirt cup. A horizontal plate separates the cyclone separator from the dirt cup. The air flowing through the cyclone separator passes through an annular cylindrical cage with baffles and through a cylindrical filter before exiting the cyclone separator at the upper end thereof. The dirt cup has three finger-like projections extending upwardly from the bottom thereof to agglomerate the dirt in the dirt cup. The dirt cup further has a pair of radial fins extending inwardly from the side walls of the dirt cup. The dirt cup and the cyclone separator is further disclosed in the co-pending U.S. Patent Application, S.N. 10/058,514, filed January 28, 2002, which application is incorporated herein by reference.
- [0005] U.S. Patent No. 6,070,291 to Bair et al. and its progeny attempts to solve the efficiency problem by shortening the air path from the cyclone exhaust to the motor

inlet. These patents disclose a pleated main filter element in a cyclonic chamber whereby exhaust air is drawn through the main filter through the bottom of the cyclonic chamber and directly into the motor/fan inlet. The motor/fan assembly is in a vertical position below the cyclone which is undesirable due to the amount of space needed at the bottom of the handle.

- [0006] U.S. Patent No. 6,341,404 to Salo et al. discloses a bottom discharge cyclone chamber with the motor/fan assembly mounted horizontally below the cyclone chamber. However, motor exhaust air is redirected back up towards the bottom of the cyclone chamber where it exits the unit in a radial fashion. This path introduces a number of turns which tends to create backpressure and therefore reduce efficiency.
- [0007] U.S. Patent No. 6,607,572 to Dyson discloses a cyclonic separating apparatus with upstream and downstream cyclonic units, wherein the downstream units comprise a plurality of cyclones inverted relative to the upstream cyclone and inverted with respect to the upstream cyclone. This arrangement of cyclones necessarily creates a tall unit because the downstream cyclones are located above the upstream cyclone.

SUMMARY OF THE INVENTION

- [0008] According to the invention, a vacuum cleaner comprises a housing defining a cyclonic airflow chamber for separating contaminants from a dirt-containing air stream and a cyclonic chamber inlet and an air stream outlet in fluid communication with said cyclonic airflow chamber. The vacuum cleaner includes a nozzle housing having a suction opening fluidly connected with the cyclonic chamber inlet, and an airstream suction source fluidly connected to the main suction opening and to the cyclonic airflow chamber for transporting dirt-containing air from the suction opening to the cyclonic airflow chamber. The suction source is adapted to establish and maintain a dirt-containing airstream from the suction opening to the cyclonic chamber inlet.

- [0009] A dirt-collecting bin is mounted to the housing beneath the cyclonic airflow chamber and includes a bottom wall and a cylindrical sidewall. A separator plate between the cyclonic airflow chamber and the dirt-collecting bin separates the cyclonic airflow chamber from the dirt-collecting bin. The separator plate has a diameter less than a diameter of the cyclonic airflow chamber adjacent the separator plate to thereby define a gap between the separator plate and the cyclonic airflow chamber for passage of dirt separated from the dirt-containing airstream in the cyclonic airflow chamber. The passage of dirt through the gap is accompanied by an airflow having horizontal and vertical components between the gap and the bottom wall of the dirt-collecting bin, which airflow tends to entrain dirt particles therein. It is believed that this airflow may be elliptical in form.
- [0010] The dirt collecting bin further comprises a centrally located vertical standpipe fluidly connected to the airstream outlet at an upper end and a dirt bin exhaust opening at the bottom end. A filter chamber is disposed beneath the bottom wall of the dirt collecting bin and is in fluid communication with the dirt bin exhaust opening. A filter assembly is positioned in the filter chamber. Filter chamber also has an outlet opening that is in fluid communication with the motor/fan inlet.
- [0011] In one embodiment, the filter chamber is integral with the dirt collecting bin whereby both the dirt bin and filter assembly are selectively removable together from the housing.
- [0012] In another embodiment, the filter chamber is separate from the dirt collecting bin and either may be selectively removed separately from the housing.
- [0013] Airflow inhibitors are present in the dirt-collecting bin to reduce the vertical component of the airflow, thereby tending to agglomerate and separate the dirt particles from the airflow.

[0014] In one embodiment, the flow inhibitors comprise at least one finger extending upwardly from the bottom wall of the dirt-collecting bin and positioned radially between a center of the dirt-collecting bin and the sidewall thereof. Preferably, the airflow inhibitors comprise a plurality of said fingers each positioned radially between a center of the dirt-collecting bin and the sidewall thereof. The fingers extend a portion of the distance between the bottom wall and the separator plate. Further, the fingers are rectangular in cross section with a long axis radially disposed in the dirt-collecting bin.

[0015] In another embodiment, the airflow inhibitors further comprise at least one fin that extends radially inwardly from the sidewall of the dirt-collecting bin. Preferably, there are two and only two fins. The fins are generally positioned vertically below the inlet. The fin or fins extend a portion of the distance between the bottom wall and the separator plate. The fin or fins extend between 40% and 60% of the distance between the bottom wall and the separator plate. Generally, the fins have a radial dimension between 2% and 10% of the radius of the dirt-collecting bin, preferably between 3% and 6% of the radius of the dirt-collecting bin. In a specific embodiment, the fins have a radial dimension equal to about 4% of the radius of the dirt-collecting bin.

[0016] In yet another embodiment, a plurality of secondary cyclones are arranged in parallel downstream from the primary cyclonic airflow chamber. The secondary cyclones are arranged in an equi-angular fashion and perpendicular to a central vertical axis of the primary cyclonic airflow chamber.

BRIEF DESCRIPTIONS OF THE DRAWINGS

[0017] FIG. 1 is a perspective view of an upright vacuum cleaner with cyclone separator according to the invention.

- [0018] FIG. 2 is a cut-away perspective view of the cyclonic separator of FIG. 1.
- [0019] FIG. 3 is a cut-away exploded perspective view of the cyclonic separator of FIG. 1.
- [0020] FIG. 4 is a front cross-sectional view of the cyclonic separator of FIGS. 1-2.
- [0021] FIG. 5 is a cross-sectional view taken through line 5-5 of FIG. 4.
- [0022] FIG. 6 is a cross-sectional view taken through line 6-6 of FIG. 4.
- [0023] FIG. 7 is a cut-away perspective view an alternate embodiment of the cyclone separator with a plurality of secondary cyclones.
- [0024] FIG. 8 is a cut-away exploded perspective view of the cyclonic separator of FIG. 7.
- [0025] FIG. 9 is a cross-sectional view taken through line 9-9 of FIG. 7.
- [0026] FIG. 10 is a cross sectional view taken through line 10-10 of FIG. 9.

DESCRIPTION OF THE PREFERRED EMBODIMENT

- [0027] An upright vacuum cleaner 10 with cyclonic dirt separator and dirt cup assembly 12 according to the invention is shown in FIG. 1, comprising an upright handle 14 pivotally mounted to a nozzle base 16. The upright handle 14 mounts the cyclonic dirt separator and dirt cup assembly 12 according to the invention.
- [0028] Referring to FIG. 2, the cyclonic dirt separator and dirt cup assembly 12 comprises a cylindrical cyclone separator 18 with an upper wall 20 and a sidewall 22, the sidewall 22 terminating in a lower offset lip 24. An annular collar 26 depends from the upper wall 20, the collar 26 being centered in the cylindrical cyclone separator 18. The sidewall 22 further includes a tangential air inlet 28 aligned proximate the upper wall 20 for generating a tangential airflow in the separator 18 parallel to the upper wall 20.
- [0029] The cyclonic dirt separator 18 further comprises an exhaust assembly 30. The exhaust assembly 30 comprises a hollow cylindrical louver cage 32 mounted on a

separator plate 34. The louver cage 32 further comprises a plurality of louvers 36 cylindrically arranged between a top portion of the louver cage 32 and the separator plate 34. A working air path is defined through the louver cage 32 and through a centrally located aperture on the separator plate 34. The louver cage 32 and separator plate 34 are removably mounted on the annular collar 26 on the upper wall 20 of the cyclone separator 18 via a friction fit. However, other mechanical fastening means can be used to removably mount the exhaust assembly 30 to the upper wall 20. For example, one quarter turn bayonet fasteners, ramped threads, detents, or any other commonly known fastening method can be used according to the invention.

[0030] Also in this manner, a toroidal chamber 48 is defined between the cylindrical arrangement of louvers 36 and the sidewall 22, and between the upper wall 20 and the separator plate 34, respectively. In the preferred embodiment, the air inlet 28 is vertically aligned between the upper wall 20 and the separator plate 34 such that the tangential airflow generated from the tangential air inlet 28 is directed into the toroidal chamber 48.

[0031] With further reference to FIGS. 2-6, the tangential airflow, containing particulate matter, passes through the tangential air inlet 28 and into the toroidal chamber 48 to travel around the exhaust assembly 30. As the airflow travels about the toroidal chamber 48, heavier dirt particles are forced toward the sidewall 22. These particles fall under the force of gravity through a gap 50 defined between an edge 52 of the separator plate 34 and the sidewall 22. Referring particularly to FIG. 4, dirt particles falling through the gap 50 drop through an open end of the separator 18 and are collected in a dirt cup and filter chamber assembly 54. The upper end of the dirt cup/filter chamber 54 is received in a nesting relationship in the lower offset lip 24 of the sidewall 22 to seal the cyclone separator 18 to the dirt cup/filter chamber 54. The dirt cup/filter chamber 54 thereby performs the function of collecting the dirt separated

from the airflow within the cyclone separator 18.

[0032] As the inlet air traverses through toroidal chamber 48, casting dirt particles toward sidewall 22, the inlet air is drawn inwardly between the louvers 36. As seen in FIG. 5, the louvers 36 are oriented away from the direction of air flow (indicated by arrows) about the toroidal chamber 48. The velocity of the air flow is altered as the air flow changes direction to pass around and between the louvers 36. This change in velocity of the air flow causes additional dirt particles to separate from the air stream. These dirt particles are urged toward the gap 50 by the circulating air flow in the cyclone separator 18.

[0033] Referring now to the dirt cup/filter chamber 54 shown in FIGS. 2-5, the dirt cup/filter chamber 54 comprises a pair of vertically oriented regions. The upper region comprises the dirt cup region 58 for collecting dirt as previously described and the lower chamber region comprises the filter chamber 60. The dirt cup region 58 is formed with a generally planar dirt cup bottom wall 62 and an upstanding cylindrical dirt cup sidewall 64 to form an open-topped receptacle. A plurality of upstanding prongs or fingers 66 project upwardly from the bottom wall 62. The fingers 66 can function in varying arrangements, but in the preferred embodiment the fingers 66 are arranged generally symmetrically about a hollow standpipe 68 concentric with sidewall 64. The hollow standpipe 68 is fluidly connected to a bottom of the exhaust assembly 30 separator plate 34 at a top end and a centrally located aperture in the dirt cup bottom wall 62 at a bottom end. The fingers 66 are found to function best when displaced at least some distance from an outer wall of the standpipe 68. Each of the fingers 66 are shown as being generally rectangular in plan view, having a long axis of its plan cross-section aligned with a radius of the circle. The fingers 66 can be of uniform cross-section from top to bottom, or can have a tapering cross-section as depicted in FIG. 4, wherein the fingers 66 are narrower at the top and wider at the

base where they join the bottom wall 62. The fingers 66, as shown in the FIGS. 2-4, are approximately one half the height of the dirt cup region 58. Increasing the height of the fingers 66 is preferred, but can be limited by production and tooling constraints and, as will be further described, the need to be able to detach the dirt cup/filter chamber 54 from the cyclone separator 18. In an alternate embodiment, the fingers 66 can be attached to an outer surface of the standpipe 68 and extend outward therefrom terminating at some distance from the outer side wall 64.

[0034] The dirt cup region 58 further includes a pair of fins 70, 72 affixed to and contiguous with the sidewall 64. The fins 70, 72 are generally rectangular in cross-section, in plan view, projecting inwardly from the sidewall 64 toward a center of the dirt cup region 58. The distance fins 70, 72 project from the sidewall 64 can range from 2 to 10% of the radius, but is preferably 3 to 6% of the radius, and optimally 4% of the radius of the dirt cup region 58. The fins 70, 72 extend generally upwardly from the bottom wall 62 of the dirt cup region 58. In the preferred embodiment, the fins 70, 72 are perpendicular to the bottom wall 62 and extend approximately one-half of the height of the dirt cup region 58, although the fins 70, 72 can vary in height from 40 to 60% of the distance from the bottom wall 62 to the separator plate 34 and still be effective. Also in the preferred embodiment, the fins 70, 72 are generally aligned in the direction of inlet airflow entering the cyclone separator 18 through the air inlet 28. As shown in FIG. 2-4, the fins 70, 72 are arranged with respect to a radial plane 74 perpendicular to the tangential line that is in alignment with the inlet 28, with fin 70 angularly displaced from radial 74 by angle θ and fin 72 displaced from radial 74 by angle ϕ . These angles can vary over a range of about 30° to 60° , and preferably in the range of 40° to 50° . It has been found that a satisfactory placement of the fins results when the angle θ is about 45° and the angle ϕ is about 45° .

[0035] A known phenomenon in cyclone separators is the re-entrainment of dirt into the

cyclonic airflow after it is apparently deposited in a dirt containment vessel positioned beneath the cyclone chamber. It has been discovered that this re-entrainment is due to the vertical component of air circulation within the dirt cup between the gap 50 at one side of the dirt-collecting bin and the bottom wall 62 at an opposite side of the dirt-collecting bin. Generally, the airflow pattern has the strongest component at the bottom portion of the dirt-collecting bin 560 below the inlet 152 to the cyclone chamber 550. This air circulation is shown in phantom lines in FIG. 4.

[0036] These vertical components of the air circulation are manifested in the "vacillating" of the dirt deposited within the dirt cup region 58. Disruption of, or a decrease in the magnitude of, these vertical components or vectors serves to minimize the re-entrainment of dirt in the cyclonic airflow and agglomeration of the dirt in the dirt cup. Disruption of the airflow tends to agglomerate the dirt particles in the dirt cup region 58, forming clumps or balls unlikely to be re-entrained. It has been found that the fingers 66 and the fins 70, 72 function in concert to inhibit the vacillation of the debris deposited in the dirt cup region 58, disrupting the elliptical vectors that generate upward currents that would tend to carry the smaller dirt particles upwardly and back into the cyclonic air flow. The fingers 66 further deflect dirt particles within the dirt cup region 58 to further encourage agglomeration of the dirt particles. The fingers 70, 72 are generally arranged symmetrically about the dirt cup region 58, but have been found to cooperate with the fins 70, 72 optimally when none of the fingers 66 are directly aligned with either of the fins 70, 72.

[0037] Referring to FIGS. 2-4, the filter chamber region 60 further comprises a bottom wall 76 in spaced relation to the dirt cup bottom wall 62 and with a side wall 80. The bottom wall 62 further comprises a centrally located aperture that is in fluid communication with a bottom portion of the standpipe 68. The bottom wall 76 further comprises an aperture to removably receive a filter assembly 82. The filter assembly

82 further comprises a filter cage 84 which supports a cylindrical foam filter 86. The filter assembly mates with the bottom wall 76 via a $\frac{1}{4}$ turn bayonet fastener or any other suitable mechanical fastening means as previously described. As can be appreciated, air flow enters the filter chamber region 60 from aperture in the bottom wall 62, passes through the foam filter 86 where particulate matter is captured, and continues on to the suction source inlet. Optionally, the suction source exhaust may pass through a final filter before re-entering the atmosphere.

[0038] The dirt cup/filter chamber 54 is removably connected to the housing 12. The dirt cup/filter chamber 54 is generally vertically adjustable relative to the cyclone separator 18, such as by a cam mechanism on a vacuum cleaner, so that it can be raised into an engaged and operative position underneath the cyclone separator 18. The upper edge of sidewall 64 is received within offset lip 24, which prevents the dirt cup/filter chamber 54 from being dislodged from the cyclone separator 18. To remove the dirt cup/filter chamber 54 from the cyclone separator 18, such as to discard accumulated dirt, the dirt cup/filter chamber 54 is displaced downwardly from the cyclone separator 18. Once disengaged from the offset lip 24, the dirt cup/filter chamber 54 can be removed from the separator 18.

[0039] Referring to FIGS. 7–10, in an alternate embodiment, a secondary cyclone assembly 100 is positioned above and in fluid communication with the working air outlet of the cyclone separator 18. The secondary cyclone assembly 100 further comprises a plurality of secondary cyclones 102 spaced about a central vertical axis 104 of the exhaust assembly 30. In this embodiment, the exhaust assembly comprises a set of louvers 36 and an annular wall 136 and is capped at an upper end by upper annular wall 137. Each secondary cyclone 102 is frusto-conical in shape with a larger end 106 located toward a secondary cyclone outer wall 108 and a smaller end 110 located toward a secondary cyclone inner wall 112. A longitudinal axis 114 of each secondary

cyclone 102 is oriented generally perpendicular to the central vertical axis 104. In an alternate embodiment, the secondary cyclone 102 is concave, or bowed out, relative to the longitudinal axis.

[0040] Each secondary cyclone 102 comprises a cone 116, a working air inlet 118 a debris exhaust 120, and a working air outlet 122. The large ends 106 of the cones 116 are closed by an end cap 107. The working air outlet 122 is located along the longitudinal axis 114 at or near the larger end 106 and extends through the end cap 107 while the debris exhaust is located at the smaller end 110 in line with the longitudinal axis 114. The working air inlet 118 is an aperture formed in a side wall of the cone 116 near the larger end 106.

[0041] The standpipe 68 extends upwardly along the vertical axis 104 through the exhaust assembly 30 and is sealingly terminated at a top surface 124 of the secondary cyclone assembly 100. The standpipe 68 is formed in two parts, an upper standpipe 126 and a lower standpipe 128. The upper standpipe 126 is fixed to the top surface 124 while the lower standpipe 128 is fixed to the dirt cup bottom wall 62. Sealing communication between the upper and lower standpipes 126, 128 is maintained by a gasket 130 therebetween. A generally cylindrical secondary debris chamber 132 is oriented along the vertical axis 114 and is formed between the inner wall 112 and an outer surface of the standpipe 68. A generally cylindrical working air plenum 134 is also oriented along the vertical axis 114 and is formed between an inner surface of the annular wall 136, an outer surface of the inner wall 112 and the upper annular wall 137. When viewed from the top, the standpipe 68, the secondary debris chamber 132, the working air plenum 134 and the outer wall 108 of the secondary cyclone assembly 100 are aligned concentrically about the vertical axis 104. The secondary debris chamber 132 is an annular conduit that terminates below the separator plate 34. A secondary debris collector 144 is formed from in a frustro-conical shape and is

attached at an inner end to the lower standpipe 128 and terminates in an upwardly directed lip 146 at an outer end. A removable lid 148 is positioned on the collector 144 and is sealed and secured at an inner annular edge to the bottom end of annular wall 136 with an upstanding annular collar 150.

[0042] Referring to FIG. 9, a working air inlet conduit 138 is in fluid communication between the working air plenum 134 and the working air inlet 118. A working air outlet conduit 140 is in fluid communication between an interior of the cone 116 near the larger end 106 and an interior surface, or exhaust chamber 142, of the upper standpipe 126.

[0043] The size and shape of the secondary cyclones 102 are important for maximizing separation efficiency. In the preferred embodiment, the larger end 106 of the cone 116 has an opening that is 10 times the surface area of the smaller end 110. However, acceptable performance is obtained within a range of ratios of the larger end to the smaller end of about 2 to 1 to about 20 to 1, preferably between about 3.5 to 1 to about 8.5 to 1. Furthermore, the number of secondary cyclones 102 utilized in the secondary cyclone assembly 100 impacts the overall separation efficiency. In the preferred embodiment, seven secondary cyclones are arranged generally equi-angularly about the vertical axis 104, however, spacing between some of the secondary cyclones 102 can vary to provide space for the work air conduits 138, 140. The number of secondary cyclones 102 utilized can, however, vary between two and fifteen and preferably between five and eleven.

[0044] Referring to FIG. 9, air flow through the secondary cyclone assembly 100 is illustrated by arrows. As previously described, inlet air is drawn through the tangential air inlet 28 and traverses around the toroidal chamber 48 casting dirt particles toward the sidewall 22 thereby separating larger primary debris from the air stream and depositing the primary debris, by force of gravity, through the gap 50 between the separator plate edge 52 and the dirt cup side wall 64. Working air passes through the

louvers 36 and into the working air plenum 134. Since the plurality of secondary cyclones 102 are arranged in parallel, working air is evenly divided to each working air inlet conduit 138. Working air then tangentially enters the cone 116 near the larger end 106 to create a swirling action within in the cone 116. As the swirling air approaches the smaller end 110 of the cone 116, the velocity of the air speeds up and throws the fine secondary debris remaining in the air stream toward the inner wall of the cone in a fashion similar to the primary cyclone separator 18. The fine secondary debris exits the interior of the cone 116 at the debris exhaust 120 and enters the collective secondary debris chamber 132 where it falls, under force of gravity, into the secondary debris collection container 144 located in the dirt cup region 58.

[0045] The working air is then forced to change direction and enters the working air outlet 122 at the larger end 106 of the cone 116. Working air passes through the working air outlet conduit 140 and enters the collective exhaust chamber 140 within the upper standpipe 126 where it is drawn to the inlet of the suction source, preferably a commonly known motor/fan assembly. Optionally, a pre-motor filter (not shown) can be located immediately upstream of the motor/fan assembly to prevent any remaining debris from entering the motor/fan assembly.

[0046] While the invention has been specifically described in connection with certain specific embodiments thereof, it is to be understood that this is by way of illustration and not of limitation. Reasonable variation and modification are possible within the forgoing disclosure and drawings without departing from the spirit of the invention which is defined in the appended claims.

Claims

- [c1] A vacuum cleaner comprising:
- a housing defining a first cyclonic airflow chamber for separating contaminants from a dirt-containing airstream as it travels about a cyclonic axis in the first cyclonic airflow chamber, said housing further comprising a cyclonic chamber inlet and an airstream outlet in fluid communication with said cyclonic airflow chamber;
 - a nozzle housing including a suction opening, said suction opening being fluidly connected with said cyclonic chamber inlet;
 - an airstream suction source fluidly connected to said main suction opening and to the first cyclonic airflow chamber for transporting dirt-containing air from the main suction opening to the cyclonic airflow chamber, said suction source is adapted to establish and maintain a dirt-containing airstream from said main suction opening through said first cyclonic airflow chamber inlet and to a first cyclonic airflow chamber outlet;
 - a dirt-collecting bin mounted to the housing beneath said first cyclonic airflow chamber, the dirt-collecting bin comprising a bottom wall, a sidewall, and a centrally located hollow standpipe;
 - a plurality of secondary cyclones, each of which is in fluid communication with the first cyclonic airflow chamber outlet wherein the secondary cyclones have cyclonic axes that are oriented perpendicular to the cyclonic axis of the first cyclonic airflow chamber.
- [c2] A vacuum cleaner according to claim 1 wherein the plurality of secondary cyclones is between one and 16 secondary cyclones.

VACUUM CLEANER WITH MULTIPLE CYCLONIC DIRT SEPARATORS AND BOTTOM DISCHARGE DIRT CUP

Abstract

A vacuum cleaner with cyclonic dirt separation and a bottom discharge dirt cup beneath the cyclone separator and a filter beneath the dirt cup and between the dirt cup and a suction motor inlet. A separator plate separates the cyclone separator from the dirt cup. Fins project from a sidewall of the dirt tank, and fingers projecting from a bottom wall of the dirt tank. A hollow standpipe in the dirt cup transports working air from the cyclone separator outlet to the filter. A cyclone separator further comprising a plurality of secondary cyclones oriented generally perpendicular to a primary cyclone separator.

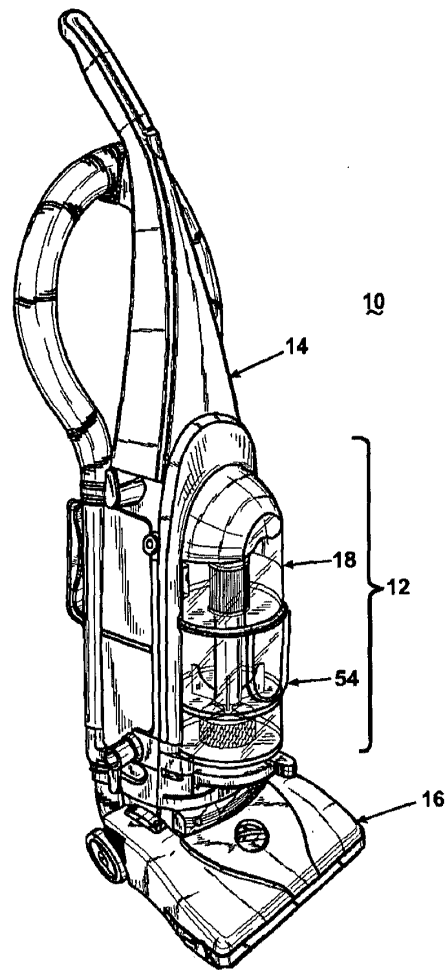


Fig. 1

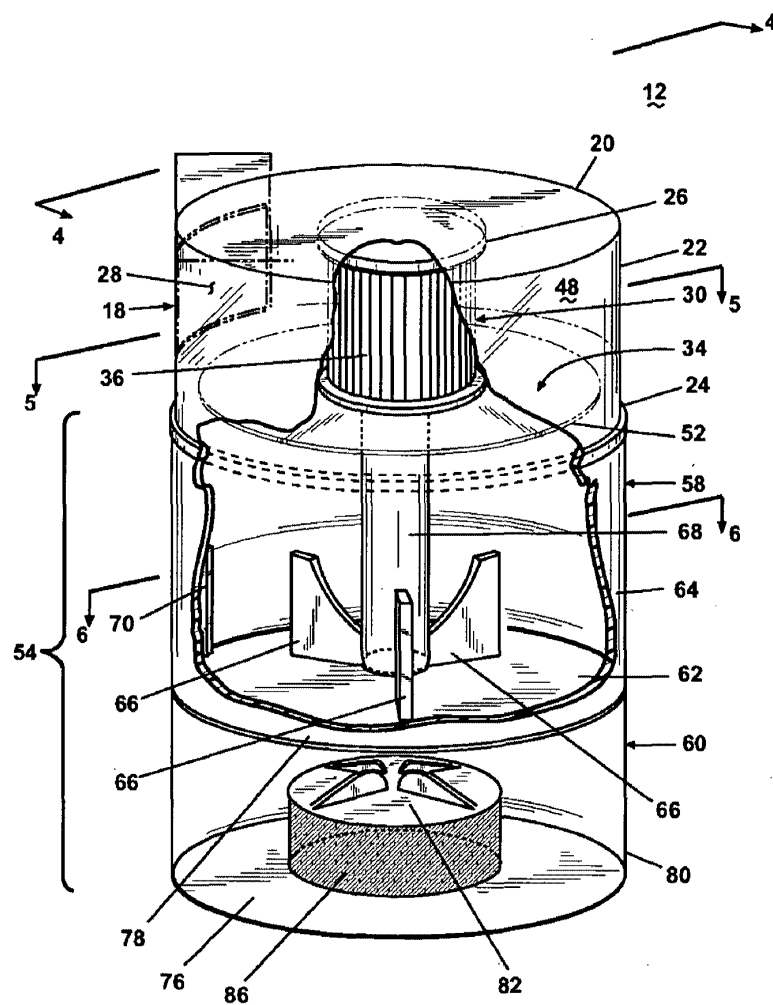


Fig. 2

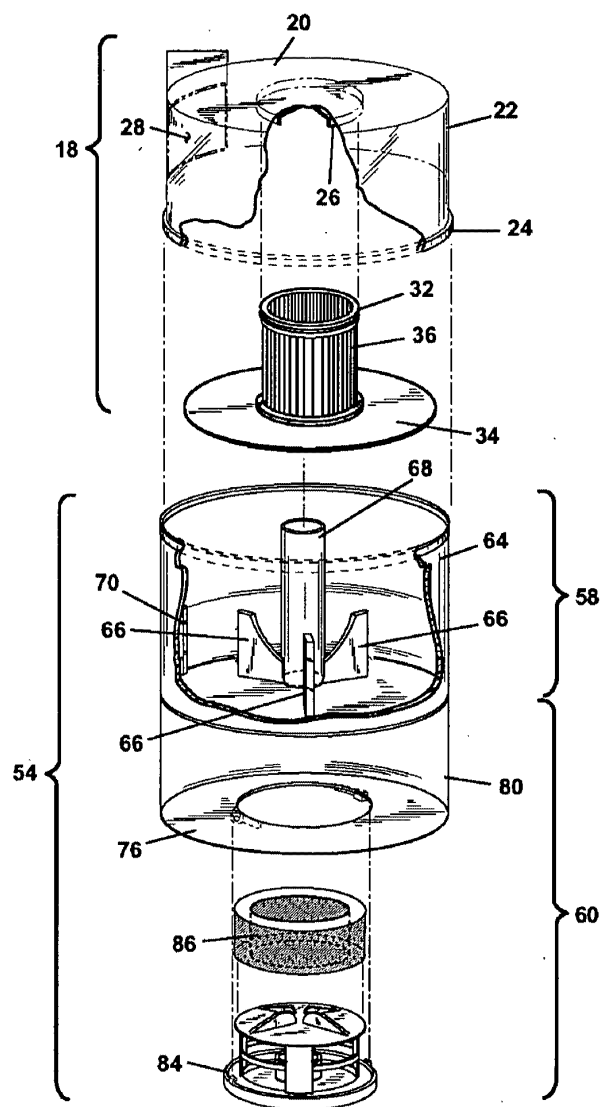


Fig. 3

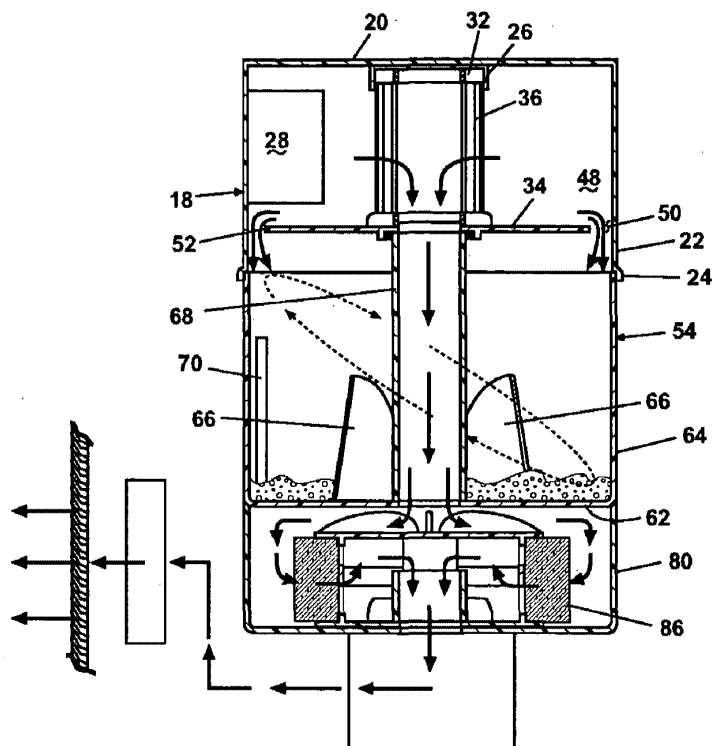


Fig. 4

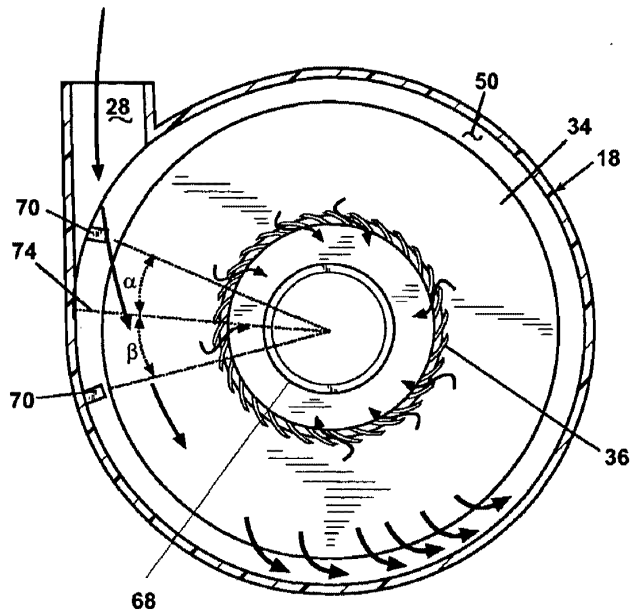


Fig. 5

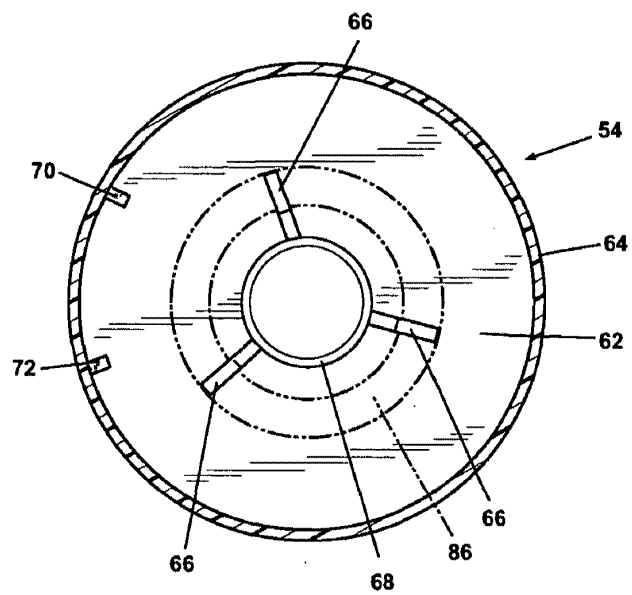


Fig. 6

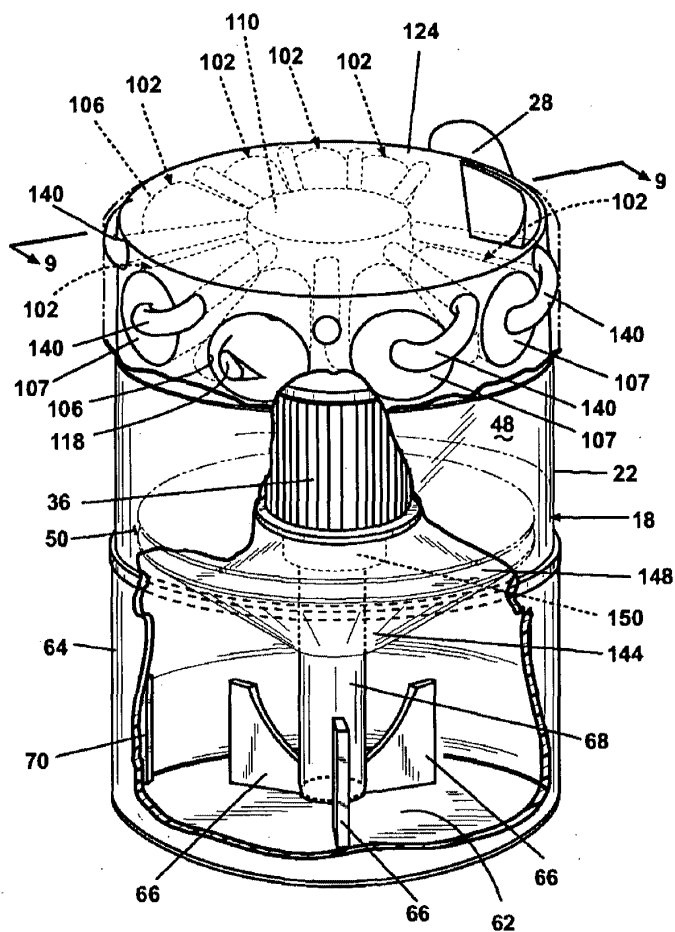


Fig. 7

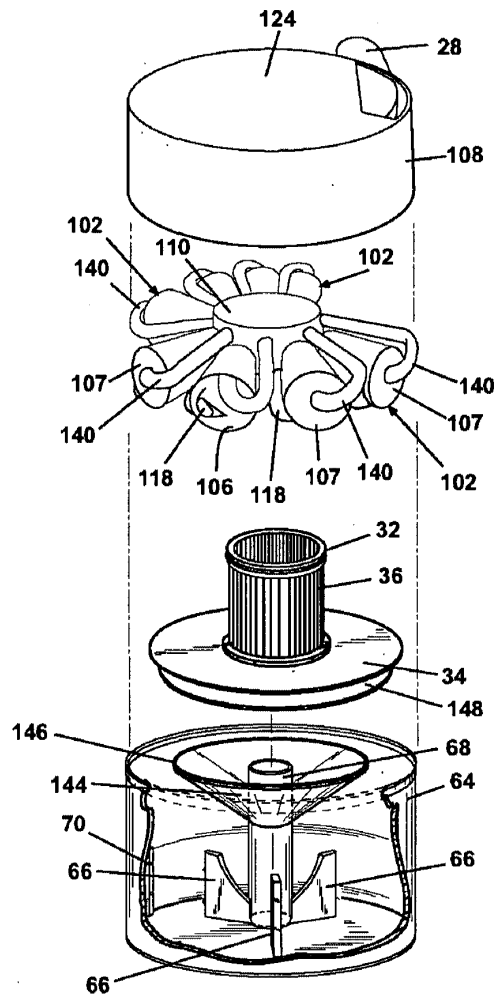


Fig. 8

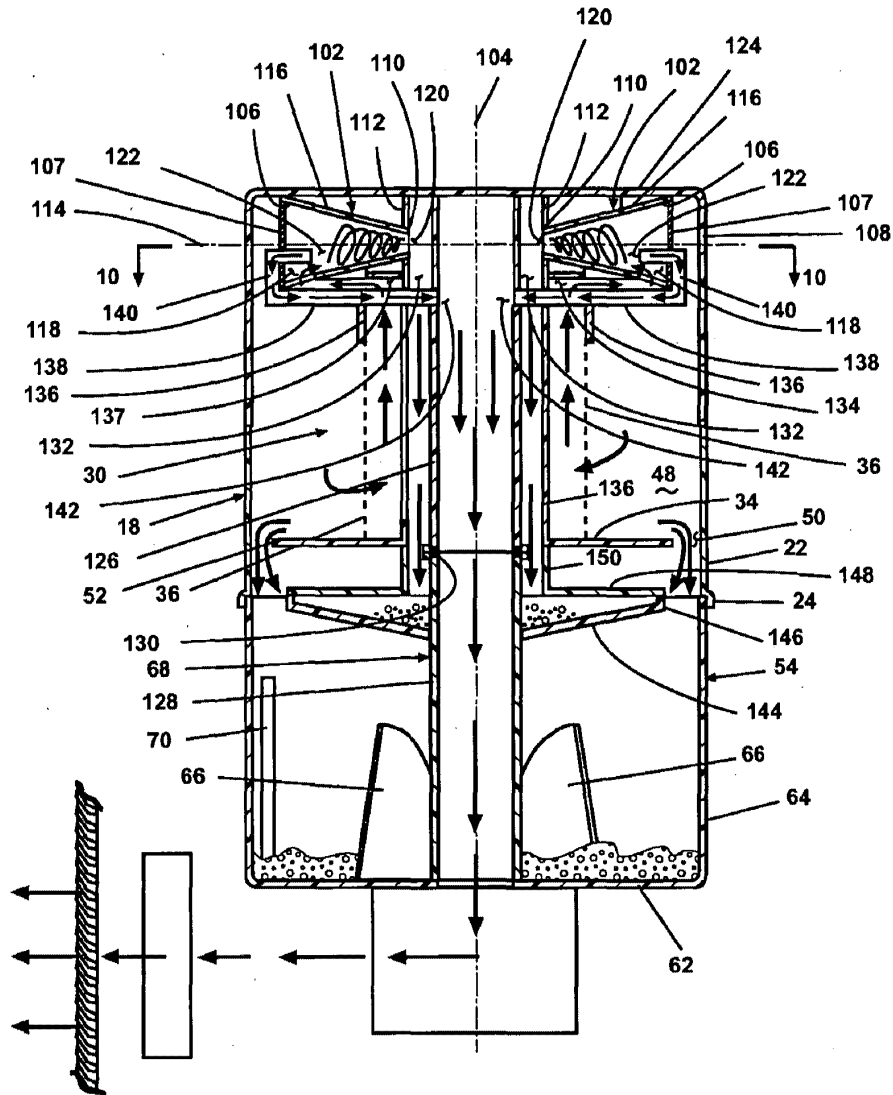


Fig. 9

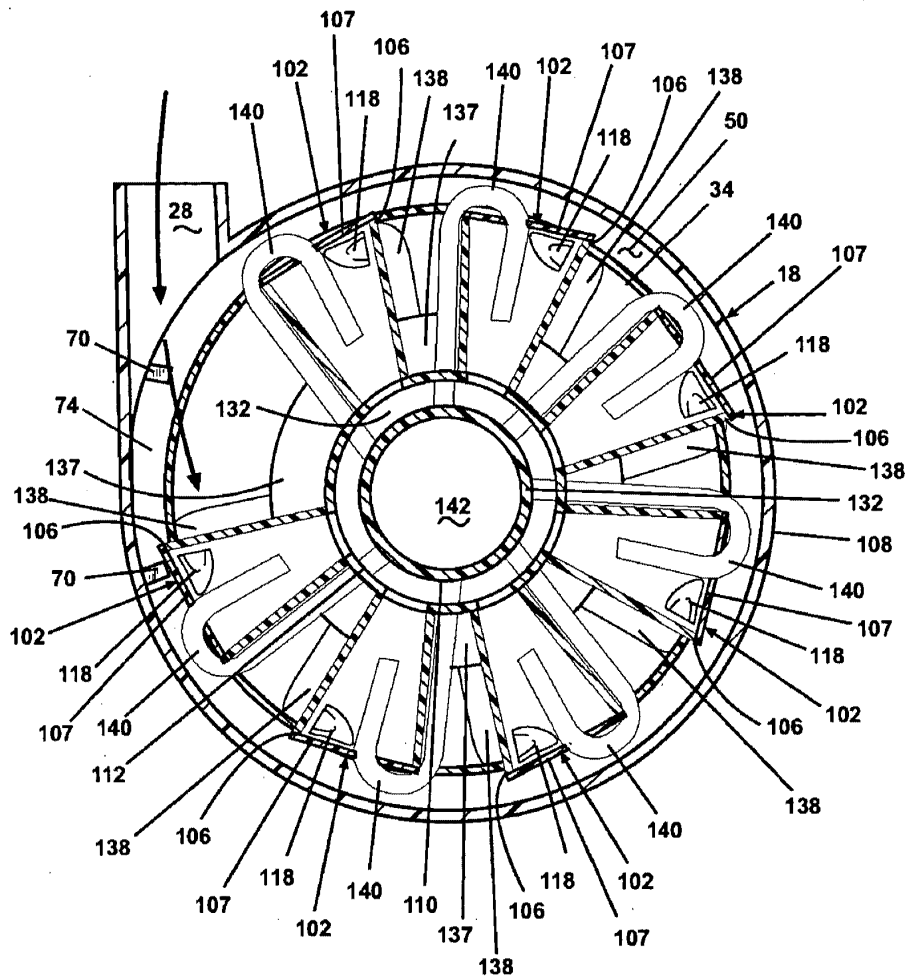


Fig. 10

APPLICATION DATA SHEET

Electronic Version v14

Stylesheet Version v14.0

Title of Invention	VACUUM CLEANER WITH MULTIPLE CYCLONIC DIRT SEPARATORS AND BOTTOM DISCHARGE DIRT CUP		
Application Type: provisional, utility Attorney Docket Number: 71189-1621			
Correspondence address: Customer Number: 20915 			
Inventor Information: <u>Inventor 1:</u> Applicant Authority Type: Inventor Citizenship: US Given Name: Joseph Middle Name: A. Family Name: Fester City of Residence: Ada State of Residence: MI Country of Residence: US Address-1 of Mailing Address: 61 Honey Creek Avenue, N.E. Address-2 of Mailing Address: City of Mailing Address: Ada State of Mailing Address: MI Postal Code of Mailing Address: 49301 Country of Mailing Address: US Phone: Fax: E-mail:			
Attorney Information: practitioner(s) at Customer Number:			

20915



as my attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

PATENT APPLICATION SERIAL NO. _____

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE
FEE RECORD SHEET

08/18/2004 VVAN11 00000002 502003 60521466
01 FC:1005 160.00 DA

PTO-1556
(5/87)



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	PATENT NUMBER	GROUP ART UNIT	FILE WRAPPER LOCATION
60/521,466			



Correspondence Address/Fee Address Change

The following fields have been set to Customer Number 110057 on 12/12/2012

- Correspondence Address
- Maintenance Fee Address

The address of record for Customer Number 110057 is:

110057
McGarry Bair PC
32 Market Ave. SW, Suite 500
Grand Rapids, MI 49503