United States Patent [19]

Hagen

[11] **4,309,152**

[45] **Jan. 5, 1982**

[54] **HYDRAULIC MOTOR/PUMP WITH VARIABLE MECHANICAL ADVANTAGE**

[75] Inventor: **Glenn E. Hagen,** New Orleans, La.

[73] Assignee: **Sea Energy Corporation,** New Orleans, La.

[21] Appl. No.: **72,987**

[22] Filed: **Sep. 6, 1979**

[51] **Int. Cl.**[3] **F04B 1/06**

[52] **U.S. Cl.** **417/218;** 417/399; 417/461

[58] **Field of Search** 417/398, 399, 505, 461, 417/428, 221, 218, 390, 273; 91/497; 92/12.1, 12.2

[56] **References Cited**

U.S. PATENT DOCUMENTS


1,072,718	9/1913	Heindl	417/399
1,902,345	3/1933	Valentine	91/497 X
2,755,966	7/1956	Lindars	91/275 X
2,762,307	9/1956	Orloff	91/502 X
3,972,268	8/1976	Freeman	91/497 X
4,028,014	6/1977	Cocks	417/403
4,077,213	3/1978	Hagen	60/500

Primary Examiner—William L. Freeh
Assistant Examiner—Edward Look
Attorney, Agent, or Firm—Arthur M. Dula

[57] **ABSTRACT**

The invention is an efficient hydraulic motor/pump whose mechanical advantage can be varied while it is operating. Preferred embodiments described include a multi-cylinder reciprocation motor/pump, a variable level power extraction system used with a wave generator, a hydraulic transformer and a hydraulic autotransformer.

3 Claims, 11 Drawing Figures

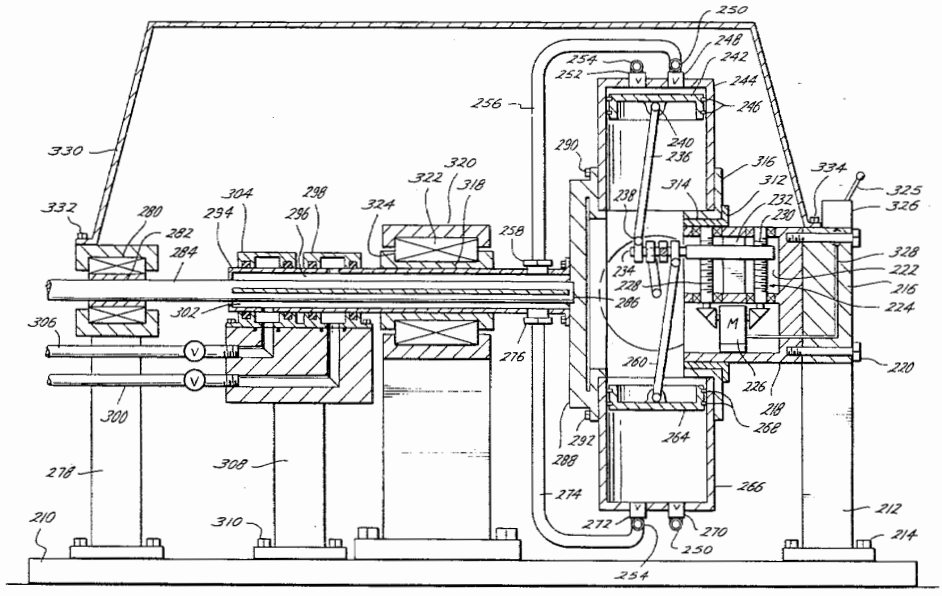

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 1 of 18

Fig. 1

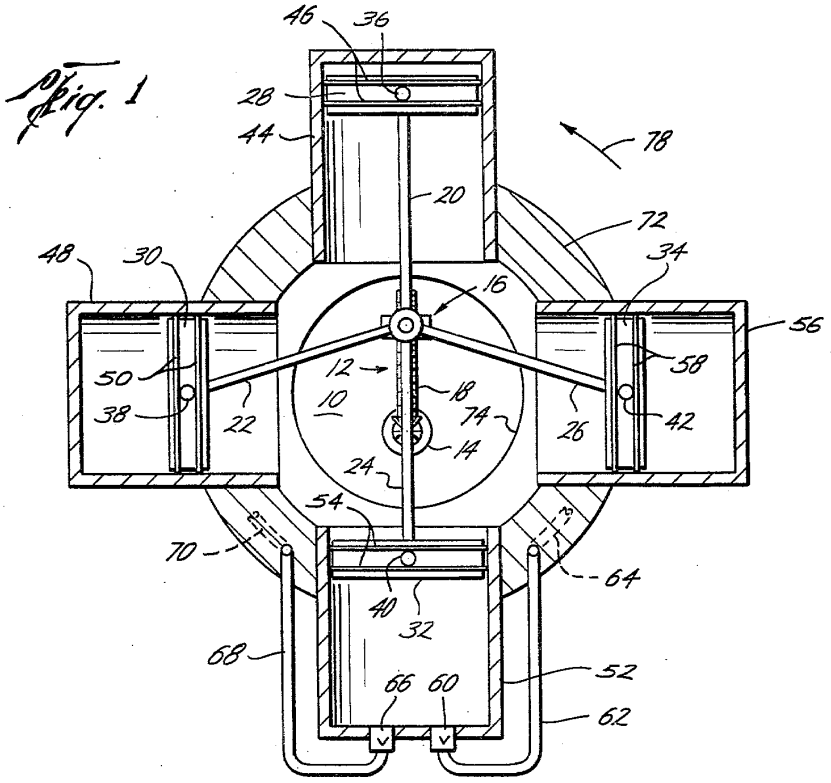


Fig. 3

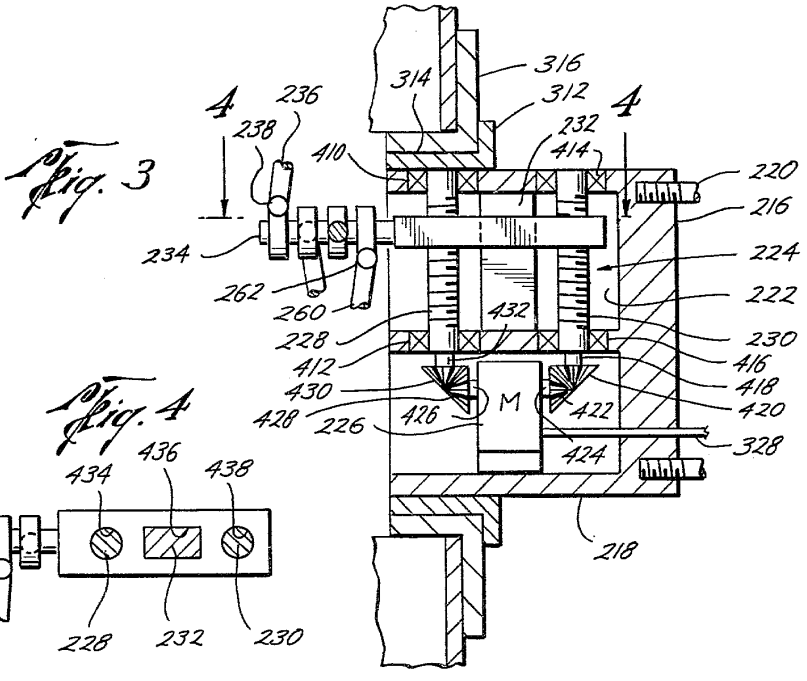


Fig. 4

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 2 of 18

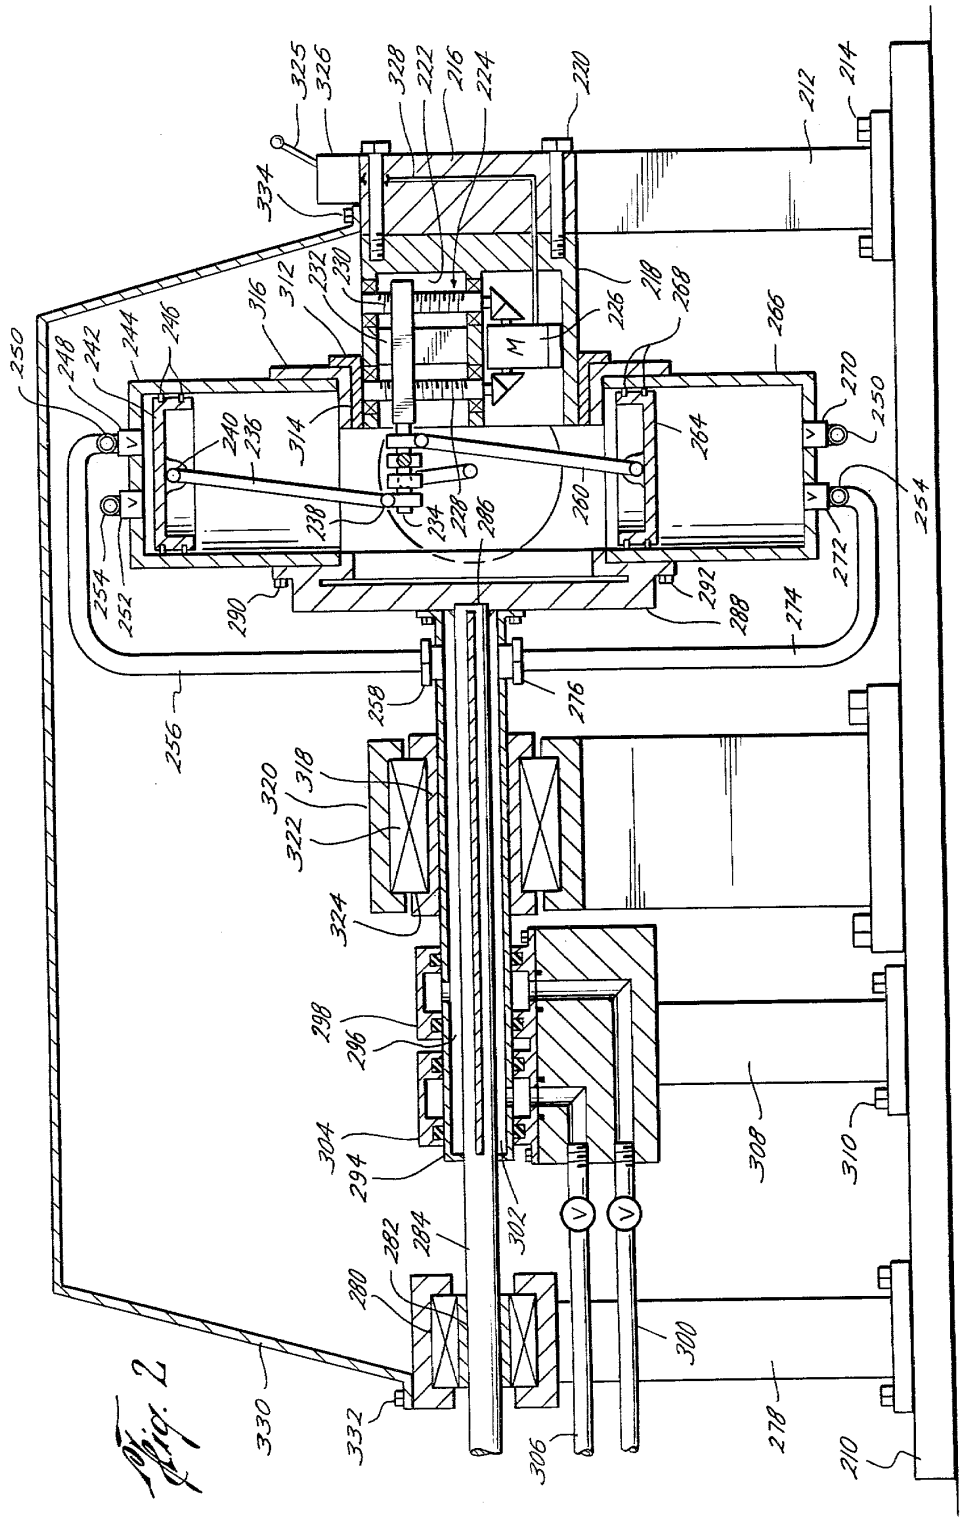

325
326
328
222
216
224
220
212
214
334
316
312
232
230
218
268
226
266
M
250
248
242
244
246
240
236
314
264
270
250
238
234
228
286
260
254
254
252
290
292
288
274
272
256
258
276
320
318
322
324
298
296
304
294
302
308
310
282
284
280
300
278
210
330
332
306

Fig. 2

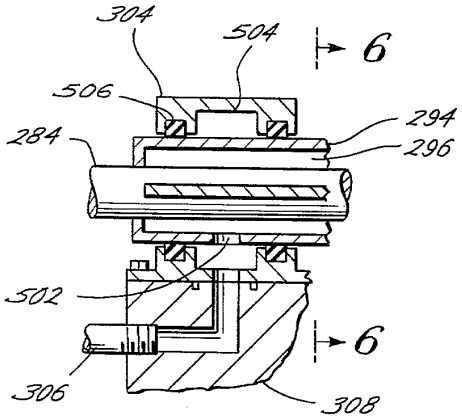


Fig. 5




Fig. 6

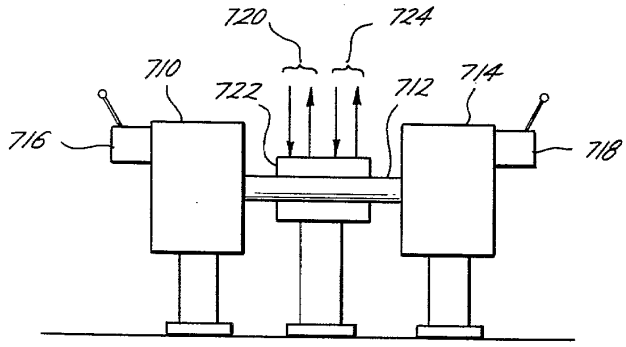


Fig. 7

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 4 of 18

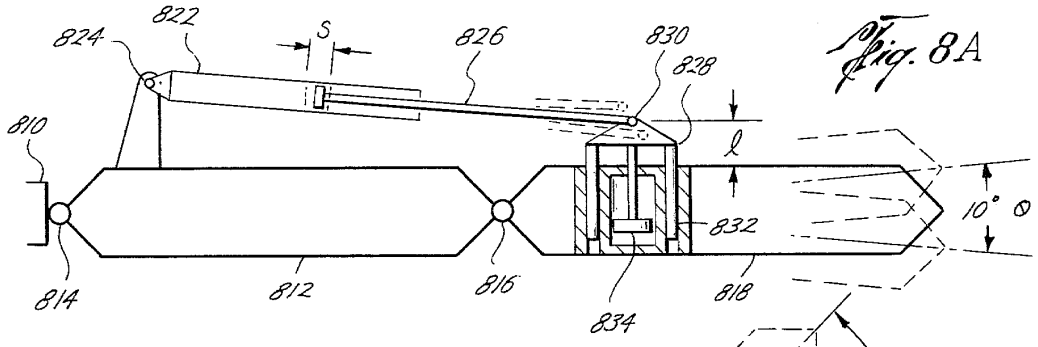


Fig. 8A

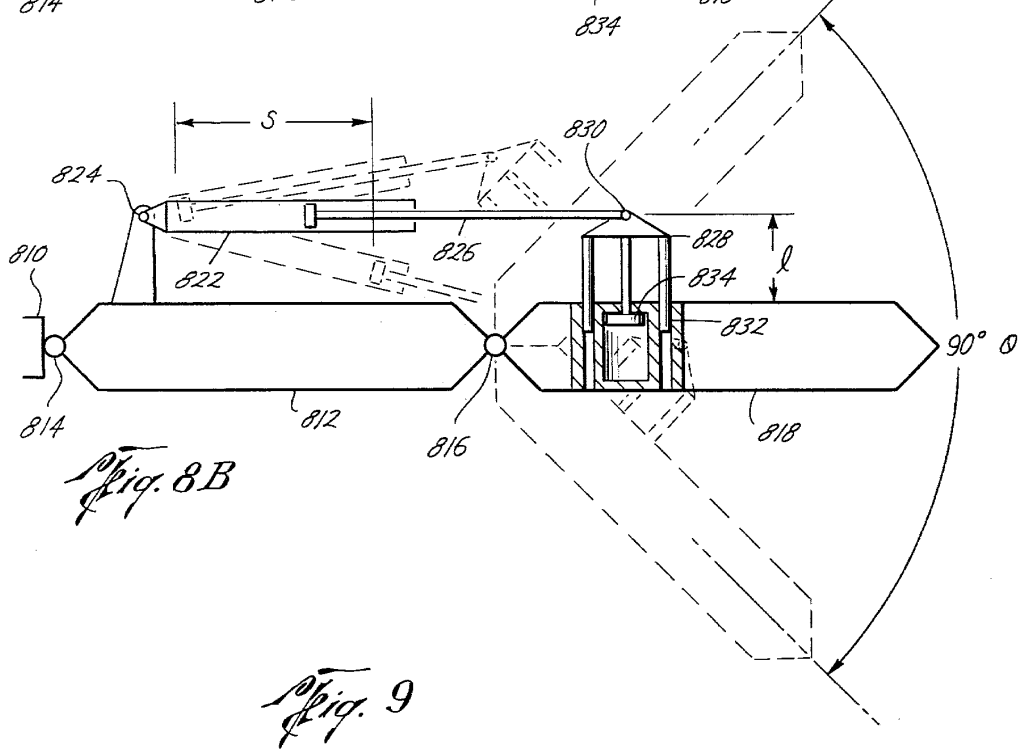


Fig. 8B

Fig. 9

Θ°	(cm) STROKE (S)	(cm) LENGTH (ℓ)	AVERAGE HYDRAULIC POWER (KWH)
10	5	57	.12
10	10	114	
10	20	229	
45	50	128	
45	100	256	
45	150	384	
90	100	130	
90	200	261	
90	300	392	9.5

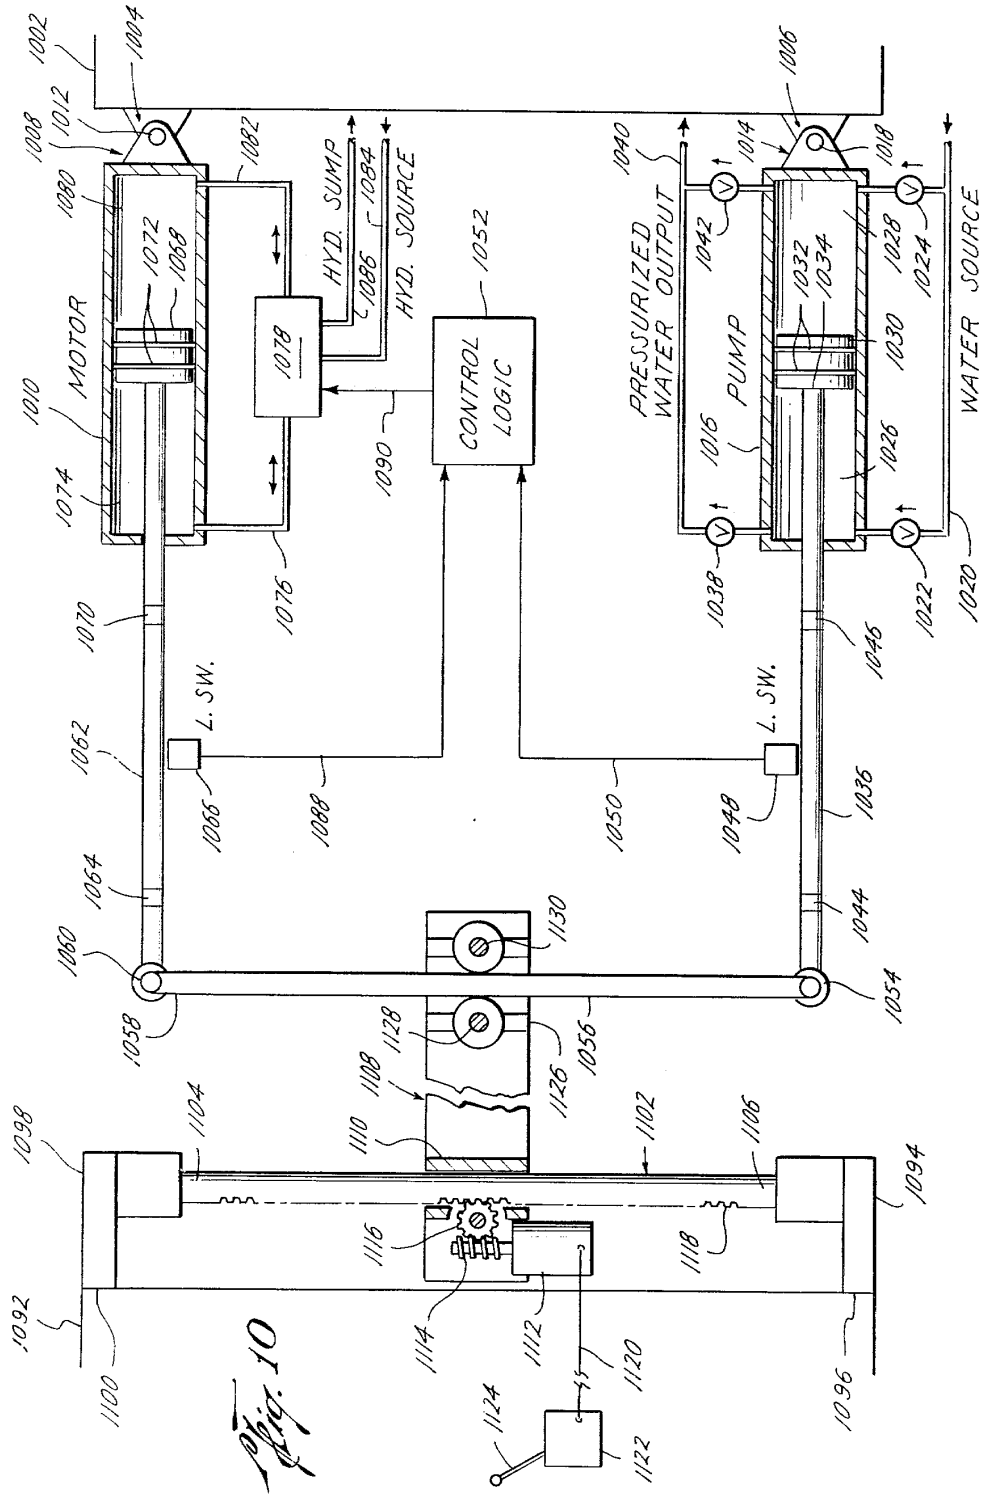


Fig. 10

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 6 of 18

HYDRAULIC MOTOR/PUMP WITH VARIABLE MECHANICAL ADVANTAGE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to hydraulic machinery and more specifically relates to hydraulic motor/pumps whose mechanical advantage can be varied during their operation.

2. Background of the Prior Art

Since the development of the water wheel and inclined screw pump in classical times, humanity has used hydraulic machinery to derive mechanical motion from flowing fluids and vice versa.

a. Specific Pumps

Hydraulic machines, for example the Pappenhein, Cochrane, Cary, Pattison, Ramelli, Emory, Heppel, Knott, Repsol, and/or Holly, rotary pumps use eccentric interlocking stators or gears to convert rotary mechanical energy into fluid pressure. The Quimby screw pump is illustrative of a class of hydraulic pumps that use screw threads in a cylinder to move viscous fluids. Other examples of higher pressure rotary pumps include those developed by Gould, Greindl, Mellory and Hasafan.

The above pumps generally have two mated gears or lobes closely fitting within a casing. One gear is the driver, the other gear, the follower, is driven by the driver. Many adaptations have been tried to obtain an efficient rotary pump.

The Gerotor pump uses an inner gear that is keyed to and rotates with, the driving shaft; an outer gear of internal type is driven by the inner gear and is free to rotate with a snug fit in a recess in one end of the housing. The teeth of the two gears are specially shaped so that the tops of all teeth of the inner gear are always in sliding contact with the teeth of the outer gear.

The Vickers vane pump is a constant discharge pump in which radial vanes produce the pumping action. The vanes are free to slide in and out of a rotating hub and so maintain contact with an outer ring. Oilways from the high pressure discharge of the pump to the spaces behind the vanes assure that this contact is maintained.

Unfortunately, rotary pumps are less efficient than piston pumps. Piston pumps include valve plate axial piston pumps, in which pistons are driven by a non-revolving wobble plate, and bent axis valve plate axial piston pump, wherein the angle between two sections of the pump housing, which may be adjusted by hand or servo control, determines piston travel.

The Hele-Shaw radial piston pump converts the rotary motion of an eccentric shaft into motion of pistons pumping fluid.

The centrifugal pump and its functional converse the turbine motor use centrifugal and reaction force, respectively, to accomplish their purposes.

b. General Discussion

Rotary Pumps are of the positive-displacement type, usually valveless, simple, compact, light in weight, and low in first cost. They are built in capacities from a fraction of a gallon (as in domestic oil burners and refrigerators) to 5,000 gpm and above, as in marine cargo service. Though used for pressure up to 1,000 psi, their particular field is for pressures of 25 to 500 psi. Before the development of the modern centrifugal pump, large rotary pumps of lobe type were used for low-head irrigation projects in capacities as large as 35,000 gpm and showed mechanical efficiencies of 80 to 85 percent.

Rotary pumps require the maintenance of very close clearances between rubbing surfaces for their continued volumetric efficiency. No satisfactory method of packing the moving surfaces to compensate for wear has been developed; consequently, although some rotary pumps are used successfully for clean water, their great field of application is in pumping oils or other liquids having lubricating value and sufficient viscosity to prevent excessive leakage. Rotary pumps are being used in the oil industry in increasing volume. They are also used for liquids of high viscosities.

Pigott (*Oil Gas Jour.*, May 10, 1934) classifies rotary pumps in the following seven groups: (1) vane type, (a) sliding vanes, (b) swinging vanes; (2) oscillating-piston or eccentric type; (3) gear type, (a) lobar, two and three teeth, (b) special-contours teeth, (c) spur gear, (d) helical and herringbone gear, (e) internal gear with two-teeth differences or with one-tooth difference; (4) screw type; (5) radial plunger type; (6) swash-plate type; and (7) miscellaneous.

Rotary pumps up to 100 psi may be considered low pressure, from 100 to 500 psi moderate pressure, and above 500 psi high pressure; fractional to 50 gpm are small-volume pumps, 50 to 500 gpm moderate-volume, and above 500 gpm large-volume.

Vane Pumps. Leakage in vane-type pumps occurs across the tips and sides of the vanes. Since the vane tips cannot be made to fit the bore of the housing in all positions, there is line contact and low resistance to leakage. Wear is serious at the higher speeds unless the vanes are restrained against centrifugal forces. Increasing the number of vanes materially decreases leakage, but increases cost and complexity.

Guided-vane Type Pumps. A single rotor revolves in a case. The pumping element consists of multiple blades sliding in and out of slots in the rotor. Impeller and case are eccentric. Centrifugal force or pressure maintains the outer end of the blades in contact with the casing bore. The blades are made of hardened steel, bronze, or bakelite. This type of pump is useful for small and moderate capacities and low pressure. Rapid wear on the points of the sliding blades and in the casing occurs where speed is high or where the liquid pumped has a low lubricating value. In some constructions, the blades are made with end trunnions operating in grooves in the side plate.

Swinging-vane Type Pumps. This type of pump has vanes that are hinged or articulated. The hinge joints are subjected to wear, and the comparatively small number of vanes or blades possible with this construction give a less satisfactory seal than do the multiple blades in the sliding-vane type. Swinging-vane pumps are used for moderate volume, for low pressure and vacuum, and for low speeds.

Eccentric-piston Pumps. Many pumps of this type are in service. The contact between the strap and the body approximates single-line contact. Leakage, therefore, becomes excessive as wear progresses. This type of pump is useful for small and medium capacities, low pressure, and limited speed.

Radial-plunger and Swash-plate Pumps. The rotation of the body carrying the plungers connects each plunger flow periodically to the suction port on the plunger's suction stroke and to the discharge port on its discharge stroke. These can be adapted for variable capacity by varying the eccentricity between the plung-

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 7 of 18

er-carrying body and the ring that drives the plungers; or by varying the angle between the drive shaft and the plunger-carrying body. The actual machines are complicated.

Lobar Pumps. Lobar pumps are suitable for medium and large capacities and low pressures. As in the oscillating-piston type, there is line contact between the impeller and the body, and leakage is excessive at higher pressures. The impellers are not self-actuating. Such pumps, therefore, must be built with external pilot gears capable of transmitting half the power utilized from the driving to the driven shaft.

Gear Pumps. These pumps are of the two-shaft type and cover a wide variety of constructions. They are used for practically all capacities and pressures. In many types, the impeller gears are self-actuating, requiring no pilot gears. The simplest form uses spur gears. The large number of teeth in contact with the casing minimizes leakages around the periphery. The utility of the straight spur-gear type is limited by trapping of liquid, which occurs on the discharge side at the point of gear intermesh, resulting in noisy operation and low mechanical efficiency, particularly at high rotative speed. Discharge pockets in the side plates may be provided to reduce the effects of trapping. Impellers in other pumps of this type are of single-helical or double-helical construction with angles from 15 to 30 degrees or more. With gears of single-helical type on higher pressure, considerable end thrust of the impeller gears on the pump side plates results. Either helical or herringbone gear construction largely eliminates the effects of trapping but introduces leakage losses between the teeth at the meshing point unless the teeth are cut without root clearance.

Internal-gear Pumps. "One-tooth difference." In pumps of this type, an impeller mounted eccentrically with the body actuates an internal gear rotating in the body or in bearings carried in the end plates. Flow is practically continuous and without reversals. High rotative speeds may be used. In such pumps, leakage occurs around the periphery of the ring gear, over the tips of the gear teeth at open mesh, and through the contact line at full mesh. This type is particularly adaptable for high pressures and high speeds, for oils with lubricating value and considerable viscosity.

"Two-teeth difference." In this construction an abutment on one side plate is used to fill the clearance between the external and internal gear. Such construction reduces leakage, but involves the use of an overhung internal gear that restricts the pump's application to small and medium capacity and pressure.

Screw Pumps. In this type of pump, a long single helical impeller of small diameter and special form actuates one or more idler impellers contained in a casing so as to displace the liquid pumped axially. Multiple surface, rather than line contacts, between screws and case minimizes leakage. This construction permits operation at very high speed. Where, right- and left-hand helices are used, the pumping load is balanced and thrust is eliminated. No shaft bearings or timing gears are required owing to the form of the impellers. Wear of rotating elements may be rapid with liquids of low lubricating value.

Double-screw Pumps. Double-screw pump construction incorporates right- and left-hand intermeshing helices on parallel shafts with timing gears. These pumps have been extensively used for medium and large capacities and moderate to high pressures. There is some leakage axially at the impeller contact. Impellers are carried in bearings so that wear on impellers and casing is reduced. Flow is practically continuous.

The mechanical efficiency of the better types of rotary pumps when handling oils or other liquids with lubricating value is good.

Aside from leakage, wear problems and strictly limited ranges of capacities and pressures, the conventional hydraulic pumps described above are generally not good hydraulic motors and vice versa.

A simple reciprocating piston connected to a flywheel doesn't leak, doesn't wear when pumping non-lubricating fluids and is both a good hydraulic pump and an efficient hydraulic motor. This arrangement's greatest defect is that its mechanical advantage is constant, or at least cannot be altered while in operation. The result of this limitation is that the speed and torque of such a motor is a function of fluid flow and pressure. Used as a pump, its delivery is a function of flywheel speed and its output pressure is a function of input torque for a given constant load.

In the past these limitations have been avoided by operating reciprocating machines at variable speeds, by bypassing some of the pumped fluid around the pump at constant speed, or by intermittently loading and unloading the pump. The size of the piston may also be changed, but not while the system is in operation. All of these expedients either require that the system be stopped or that it lose efficiency.

SUMMARY OF THE PRESENT INVENTION

The present invention is a hydraulic pump whose crankshaft is stationary while its cylinder or cylinders rotate. Since the crankshaft is stationary, its connecting rods' length and thus the mechanical advantage of the system, can be varied while the invention is in operation. This change in mechanical advantage creates a variable hydraulic gear box. Connecting two such gear boxes together produces a hydraulic equivalent of a variable transformer. The addition of servo-control produces a hydraulic autotransformer. The invention may also be used to construct a high efficiency, variable power absorber for a wave generator.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a partially cutaway schematic view of a four-cylinder hydraulic motor/pump constructed according to the preferred embodiment of the present invention;

FIG. **2** is a cutaway side view of a motor/pump constructed according to the preferred embodiment of the present invention;

FIG. **3** is a detailed cross-sectional view of the variable length crankshaft unit in FIG. **2**;

FIG. **4** is a view taken along lines **4**—**4** of FIG. **3**;

FIG. **5** is a detail of the fluid coupling utilized by the preferred embodiment of the present invention shown in FIG. **2**;

FIG. **6** is a view taken along section lines **6**—**6** of FIG. **5**;

FIG. **7** is a conceptual block diagram illustrating a hydraulic variable transformer constructed using the preferred embodiment of the present invention;

FIG. **8A** shows another embodiment of the present invention configured as a variable power absorber on a wave generating system during low (10 degree) sea states;

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 8 of 18

FIG. 8B shows the same embodiment of the present invention as is shown in FIG. 8A except that the invention is now adapted to absorb power from 90 degree sea states;

FIG. 9 is a table detailing the sea state "θ", length "l", stroke "s", and amount of hydraulic power generated by the embodiment of the present invention shown in FIGS. 8A and 8B.

FIG. 10 illustrates a third embodiment of the present invention wherein mechanical advantage is varied on a level arm between two parallel-mounted hydraulic cylinders.

INDEX LIST TO DRAWINGS

10 Crankshaft block
12 Crankshaft unit
14 Motor
16 Crankshaft
18 Screw thread
20 Connecting rods
22 Connecting rods
24 Connecting rods
26 Connecting rods
28 Pistons
30 Pistons
32 Pistons
34 Pistons
36 Wrist pins
38 Wrist pins
40 Wrist pins
42 Wrist pins
44 Cylinder
46 Sealing ring
48 Cylinder
50 Sealing ring
52 Cylinder
54 Sealing ring
56 Cylinder
58 Seal ring
60 Valve (inlet)
62 Hydraulic pipe
64 Fluid manifold
66 Outlet valve
68 Outlet tube
70 Outlet manifold
72 Cylinder block
74 Bearing surface
78 Arrow
210 Base plate
212 Upright
214 Bolts
216 End
218 Crankshaft block
220 Bolts
222 Cavity
224 Offset crankshaft
226 Motor
228 Screw threads
230 Screw threads
232 Bearing
234 Crankshaft
236 Connecting rod
238 Bearing end
240 Upper end
242 Piston
244 Cylinder
246 Seal ring
248 Inlet valve
250 Inlet manifold
252 Outlet valve
254 Output manifold
256 Hydraulic line
258 Inlet adapter
260 Connecting rod
262 End
264 Piston
266 Cylinder
268 Annular ring
270 Inlet valve
272 Outlet valve
274 Hydraulic line
276 Shaft adapter
278 Bearing post
280 Bearing blocks
282 Bearing surfaces
284 Drive shaft
286 End
288 Hub assembly
290 Bolt
292 Bolt
294 Carrier shaft
296 Hydraulic passageway
298 Hydraulic coupler
300 Inlet supply pipe
302 Hydraulic passage
304 Coupler
306 Hydraulic line
308 Coupler support
310 Bolt
312 Annular bearing
314 Bottom
316 Outer edge
318 Thrust bearing
320 Support structure
322 Bearing block
324 Outer portion
325 Control lever
326 Controller
328 Line
330 External housing
332 Bolts
334 Bolts
410 Upper bearing
412 Lower bearing
414 Upper bearing
416 Lower bearing
418 Shaft
420 Spur gear (vertical)(rear)
422 Horizontal spur gear (rear)
424 Shaft
426 Shaft
428 Frontal horizontal spur gear
430 Frontal vertical spur gear
432 Shaft
434 Threaded opening
436 Bearing opening
438 Threaded opening
502 Opening
504 Interior
506 Bearing surface
602 Partitions
604 Partitions
710 Hydraulic motor
712 Shaft
714 Drive pump
716 Control assembly

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 9 of 18

718 Control assembly
720 Input-output pair
722 Coupling
724 Input-output pair
810 Fixed point
812 Float
814 Hinge
816 Hinge
818 Float
822 Cylinder
824 Hinge
826 Shaft
828 Support
830 Hinge
832 Bearing
834 Cylinder
1002 Fixed mounting
1004 Pivot mount
1006 Pivot mount
1008 Pivot flange
1010 Cylinder
1012 Bearing
1014 Flange
1016 Cylinder
1018 Bearing
1020 Water source line
1022 Valve
1024 Valve
1026 Forward portion
1028 Rear space
1030 Piston
1032 Seal ring
1034 Wrist pin
1036 Pump shaft
1038 Valve
1040 Output line
1042 Valve
1044 Magnetized portion
1046 Magnetized region
1048 Switch
1050 Control line
1052 Control logic
1054 Bearing
1055 End
1056 Rocker arm
1058 End
1060 Bearing
1062 Motor arm
1064 Magnetized region
1066 Limit switch
1068 Piston
1070 Magnetized region
1072 Sealing ring
1074 Forward portion
1076 Line
1078 Valve
1080 Rear interior portion
1082 Hydraulic line
1084 Line
1086 Line
1088 Line
1090 Line
1092 Mounting surface
1094 Mount
1096 Weld
1098 Mounting means
1100 Weld
1102 Bearing surface
1104 Upper end
1106 Lower end
1108 Fulcrum assembly
1110 Bearing
1112 Motor
1114 Worm gear
1116 Idler gear
1118 Geared portion
1120 Control line
1122 Motor controller
1124 Control lever
1126 Fulcrum assembly
1128 Bearing
1130 Bearing

DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. **1** shows a schematic cross-sectional view of a hydraulic motor/pump constructed according to the preferred embodiment of the present invention.

Stationary crankshaft block **10** includes variable crankshaft unit **12**, which is a screw thread **18** engaging motor **14**. Movable crankshaft **16** moveably engages elongated threaded member **18**.

Crankshaft **16** comes out of the plane of FIG. **1** and rotatingly engages connecting rods **20**, **22**, **24**, and **26** by means of conventional crankshaft bearings.

Connecting rods **20**, **22**, **24**, and **26** are connected at their terminal ends to pistons **28**, **30**, **32**, and **34**, respectively, through wrist pins **36**, **38**, **40**, and **42**, respectively.

Piston **28** is movably disposed within cylinder **44**. Piston **28** is held in sealing contact with the interior of cylinder **44** by means of annular sealing rings **46**. Piston **30** is movably disposed within cylinder **48** and is in sealing contact with the interior of cylinder **48** by means of annular seal rings **50**. Piston **32** is movably disposed within cylinder **52**. The outer perimeter of piston **32** is held in sealing contact with the interior of cylinder **52** by means of annular seal rings **54**. Piston **34** is movably disposed within cylinder **56**. The outer perimeter of piston **34** is held in sealing contact with the interior of cylinder **56** by means of annular seal rings **58**.

Referring now to cylinder **52** in FIG. **1**, inlet valve **60** is in fluid connection with the interior of cylinder **52** and, by means of hydraulic pipe **62**, is in fluid communication with inlet fluid manifold **64**. Outlet valve **66** is similarly disposed by means of outlet tube **68** between outlet manifold **70** and the interior of cylinder **52**.

It should be understood that FIG. **1** is included in this specification to teach how to make and use the present invention. The pistons and cylinders described above may be made of any material sufficiently strong to withstand the pressure generated by the invention when it is being used as a pump or motor, i.e., between 50 psi and 14,000 psi. The inlet and outlet valves described in connection with cylinder **52** are self-actuating check valves when the present invention is operating as a pump, but will require external means of mechanical or electrical actuation when the present device is operating as a motor. These valve actuating means, which may be either mechanical, hydraulic or electrical, are well known to those skilled in the art of mechanical and hydraulic engineering. Thus, purely as a convenience and for simplicity, these actuation means will not be described in detail, but discussion will be had as if such actuation means were present.

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 10 of 18

Cylinders **44**, **48**, **52**, and **56** are mechanically fixed within a cylinder block **72**. This cylinder block is shown in FIG. **1** as being a circular metal casting adapted to receive the cylinders much as the block of some foreign automobiles, i.e., Renault, receives cylinder inserts. It should be understood that this cylinder block **72** can be any means for holding the cylinders in position and also provides a bearing surface **74** along its inner perimeter disposed so as to make sliding contact with the outer bearing surface of crankshaft block assembly **10**.

The cylinders and pistons of this invention rotate, thus good engineering practice will dispose the cylinders such that the center of mass of the cylinders and block **72**, taken together as a rotor or cylinder assembly, will be as close as possible to the assembly's center of rotation.

Bearing **74** and the wrist pins and crankshaft bearings used by the preferred embodiment of the present invention must be lubricated to function properly. Lubrication systems required to pump oil or other lubricating fluids to such bearings are well known to those skilled in the art of hydraulic or automotive engineering. Thus the oiling systems that are a necessary part of the present invention are not shown because their design and manufacture would be obvious to anyone of ordinary skill in the art to which this invention pertains.

The materials used to construct the crankshaft and connecting rods of the present invention must be strong enough not to break and rigid enough not to deform under the loads imposed on them when the present invention is operating as either a motor or a pump.

Functionally, cylinder block assembly **72** and cylinders **44**, **48**, **52** and **56** rotate on bearing **74** around stationary crankshaft block assembly **10**. In FIG. **1** crankshaft **16** is shown positioned approximately three-quarters of the way up threaded member **18**.

Because crankshaft **16** is offset from the center of rotation of block **72**, rotating block assembly **72** on bearing surface **74** in the direction indicated by arrow **78** causes pistons **28** to move inward toward block **10** in cylinder **44**, while piston **32** moves outward in cylinder **52**. Given the indicated rotational direction **78** of block **72**, piston **34** moves toward the top of cylinder **56** while piston **30** moves toward the bottom of cylinder **48**.

As piston **32** moves toward the top of cylinder **52** the hydraulic fluid within cylinder **52** is forced through outlet valve **66** and outlet tube **68** into outlet manifold **70**. From outlet manifold **70**, as will be shown in greater detail in FIG. **2** below, the pumped fluid is carried out of the pump. Simultaneously, the downward movement of piston **28** in cylinder **44** draws hydraulic fluid in through its associated inlet valve from the inlet manifold.

For the purpose of simplicity, only one set of inlet and outlet valves, those associated with cylinder **52**, is shown. It should be understood that each cylinder in the present invention is equipped with such valves.

To vary the mechanical advantage of the present invention, prime mover **14** rotates screw thread **18**. This rotation moves crankshaft assembly **16** toward or away from the center of rotation of crankshaft block **10** depending on the screw thread's direction of rotation. If crankshaft **16** is moved toward the center of rotation of crankshaft block **10**, then the stroke of the pistons in the present invention in their respective cylinders becomes shorter by a factor of 2 k, where k is the change in distance between the center of shaft **16** and the center of rotation of block **10**, while the pressure exerted on the hydraulic fluid by the piston becomes proportionately greater for a constant load. In all the examples citing specific flow rates and pressures in this application, a constant load is assumed. The effect of higher flow rates on hydrodynamic drag is also ignored. In reality hydrodynamic drag goes up as power function of flow rate. As the examples given in the present specification are illustrative, those skilled in the art will clearly understand them despite these simplifications.

In the limiting case, when the crankshaft assembly **16** has been lowered on screw thread **18** until its center coincides with the center of rotation of crankshaft block assembly **10**, then all of the pistons sit stationary in their respective cylinders. In this condition the present invention is totally unloaded and the only work done by the present invention would be that work required to overcome the frictional losses associated with bearing **74** and the connecting rod bearings on crankshaft assembly **16**.

At the other extreme, when prime mover **14** has rotated screw thread member **18** so as to move crankshaft assembly **16** to the upper limit of travel on screw **18**, then pistons **28**, **30**, **32** and **34** travel their maximum stroke, i.e., virtually the entire length of their respective cylinders. This causes the present invention to output a maximum flow of pumped fluid at minimum pressure for a given speed and torque of cylinder block assembly **72**.

By varying the mechanical advantage of the present invention, any given rotational speed and torque input can selectably result in output flow rates and pressures that may be adjusted from a small flow rate at a high pressure to a high flow rate at a low pressure. Thus the present invention can replace all the prior art pumps discussed above while operating at higher efficiency and lower wear factors even when pumping non-lubricating fluids. The use of many cylinders can make output flow continuous.

The mechanical power put into the present invention when it operates as a pump is always equal to the hydraulic power, i.e., flow rate times the pressure, output from the invention, less frictional losses.

Within the envelope of possible pressures and flow rates dictated by the mechanical size of the pistons and the amount of offset from center of rotation to which the crankshaft of the present invention can be extended, the invention can continuously vary the flow rate and pressure to always equal the same hydraulic power.

FIG. **2** shows a longitudinal cross-section of a motor/pump constructed according to the preferred embodiment of the present invention.

Base plate **210** has a first upright **212** affixed to it by bolts **214**, by welding or any other convenient means. Upright **212** has connected to its upper end **216** a crankshaft block assembly **218**, which is secured to upper end **216** of upright **212** by bolts **220**, by welding or any other convenient means.

The end of crankshaft block assembly **218** opposite upper end **216** of upright **212** has a cavity **222** that contains variable offset crankshaft assembly **224**.

Crankshaft assembly **224** includes a motor **226** that is adapted to drive a pair of screw threads **228** and **230**. Between screw threads **228** and **230** is a rectangular bearing **232**. In FIG. **2**, crankshaft **234** is shown approximately three-quarters of the way up screw threads **228**, **230** and bearing **232**. Crankshaft assembly **224** is described in greater detail in the discussion describing FIG. **3** below.

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 11 of 18

Connecting rod **236** is connected at its lower connecting rod bearing end **238** to crankshaft **234** and at its upper end **240**, by a wrist pin not shown, to piston **242**. Piston **242** is held in slidably sealing contact with the interior of cylinder assembly **244** by annular seal rings **246**.

At the top of cylinder assembly **244**, inlet valve **248**, which is a check valve adapted to let fluid into the cylinder, but not out of it, is in fluid communication with the interior of cylinder **244** and with inlet manifold **250**.

Similarly outlet valve **252** is in controlled fluid communication with the interior of cylinder **244** and is also in fluid communication with output manifold **254**. Outlet valve **252** is a check valve adapted to allow fluids to flow out of cylinder **244**, but not into it. Inlet manifold **250** is in fluid communication by hydraulic line **256** to shaft inlet adapter **258**.

Similarly, connecting rod **260** is connected at its crankshaft end **262** by a crankshaft bearing to crankshaft assembly **234** and at its piston end by a wrist pin, not shown, to piston **264**. Piston **264** is maintained in sealing contact around its outer perimeter with the interior of cylinder assembly **266** by means of annular rings **268**.

Inlet valve **270** controllably connects the interior of cylinder assembly **266** with inlet manifold **250**, which is an annular manifold running around the outer perimeter of the cylinder on this embodiment of the present invention. Similarly, output valve **272** is in fluid communication with the interior of cylinder assembly **266** and is in fluid communication with outlet manifold **254**.

Outlet manifold **254** is in fluid communication by hydraulic line **274** with hydraulic shaft adapter **276**.

Bearing post **278** supports bearing blocks **280**. Bearing surfaces **282** are in contact with drive shaft **284**. It should be understood that all the bearings in the present invention have associated lubrication means which are not shown because they are well known to those skilled in the art of hydraulic and mechanical engineering.

Steel shaft **284** is affixed by welding or any other convenient means at its end **286** to hub assembly **288**. Hub assembly **288** is connected by bolts **290** or any other convenient means to the exterior of cylinder assembly **244** and by bolts **292** to the exterior of cylinder assembly **266**.

An annular hydraulic carrier shaft **294** surrounds steel shaft **284**. This shaft defines two hemi-cylindrical fluid passageways. Details of this shaft are given in FIGS. **5** and **6** and the related text below.

Hydraulic connector **258** is in fluid communication with hydraulic passageway **296**, which, in turn, is in fluid communication with hydraulic coupler **298**. Hydraulic coupler **298** is in fluid communication with inlet supply pipe **300**, which is connected to a hydraulic source not shown.

When the present invention is operated as a pump, line **300** is connected to a hydraulic sump. When the present invention is operated as a hydraulic motor, line **300** is connected to a hydraulic pressure source.

Fitting **276** places hydraulic line **274** in fluid communication with hydraulic passage **302**, which, in turn, is in fluid communication with coupler **304** and hydraulic line **306**. When line **300** is connected to a sump, line **306** is connected to a source and vice versa.

Hydraulic couplers **304**, **298** are held by bolts, welding or any other convenient means on hydraulic couplers support **308**, which is attached by bolts **310**, by welding or any other convenient means, to base plate **210**.

Bearing support stand **278** is also connected by bolts or other convenient means as shown to base **210**.

Annular bearing **312** is affixed by any convenient means to the outer perimeter of crankshaft block assembly **218** on its side opposite upper end **216** of upright support **212**. Bearing **312** is preferably an annular bearing that engages both the bottom **314** and the outer edge **316** of the carrier block of the cylinder assembly of the present invention.

Annular thrust bearing **318** is affixed by any convenient means to the outer perimeter of hydraulic supply shaft **294** where said shaft passes through bearing support structure **320**, which contains bearing blocks **322**. Thrust bearing **318** is adapted to act as a bearing along that portion of shaft **294** that is within bearing block assembly **322** and on the outer portions **324** of bearing block assembly **322**. The purpose of this thrust bearing is to prevent lateral motion of the rotor assembly of the present invention.

When the present invention operates as a pump, torque is applied to driveshaft **284** from a prime mover, not shown. Torque is imparted through assembly **288** to rotate the piston assembly of the present invention around stationary crankshaft block **218**. This rotation occurs on bearings **312**, **318** and **282**. Note that, in the preferred embodiment of the present invention shown in FIG. **2**, bearing **318** keeps the rotatary assembly from moving to the right or left, i.e., laterally, while bearings **312** and **282** take the weight of the rotating portion of the invention.

When the embodiment of the present invention shown in FIG. **2** operates as a pump, fluid flows from a sump through fluid supply line **300**, annular fluid coupling **298**, and fluid passageway **296**, fitting **258** and supply line **256** to inlet manifold **250**. As the cylinder assembly rotates, hydraulic fluid is drawn through the inlet valves of the respective cylinders during their downward stroke and forced through the output valve of the respective cylinders during their downward stroke. As was discussed in connection with FIG. **1**, above, for a given amount of input power, the delivery of output hydraulic power may be varied in pressure and flow rate, these two variables always being inverse to one another, by adjusting the degree of offset of crankshaft assembly **234** from the center of rotation of the cylinder assembly of the present invention.

Once hydraulic fluid is forced out through the outlet valves of the respective cylinders into the outlet manifold, it flows through manifold **254**, outlet line **274**, coupling **276**, output annular passageway **302** and fluidic coupling **304** to output line **306**.

Control **325** controls the flow of electric power from controller **326** through line **328** to motor **226**. Motor **226** is a reversible electric motor capable of driving screw thread assemblies **228** and **230** in either direction and thus raising or lowering crankshaft assembly **234**. This controller may be fluidic, electrical or mechanical. A simple hand wheel could be connected through a flexible shaft or gearing arrangement to raise or lower crankshaft **234**. Alternatively, pressure sensors could be placed in the input line and/or torque sensors could be placed on the input drive shaft and negative feedback servo-control of the position of crankshaft **234** could be utilized to maintain a constant output pressure or flow rate in the face of variable torque and rotational speed to the input shaft.

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 12 of 18

Protective external housing **330** is connected by bolts **332** to the top of bearing stand **278** and by bolts **334** to the top of vertical posts **212**. The purpose of this external housing is to comply with various OSHA and NIOSH standards for the protection of workers from rotating machinery. It completely encloses all moving parts of the present invention.

Pump Example

Pistons **242** and **264** have a diameter of 10 inches, i.e., an area of 78.5 square inches, and crankshaft adjusting mechanism **224** can adjust the length of the stroke of these pistons from zero inches to 24 inches. Given these parameters, if shaft **284** is driven at 100 rpm at a torque sufficient to produce 100 psia hydraulic pressure output when crankshaft assembly **234** is adjusted so as to produce a stroke of 24 inches, then the four-cylinder pump described in FIGS. **1** and **2** will discharge 3,264 gallons per minute at 100 psia pressure. If crankshaft adjusting mechanism **224** moves crankshaft **234** so that its center lies only 3 inches from the center of rotation of the cylinder assembly in the present invention, then the total stroke of the pistons of the preferred embodiment of the present invention is reduced to six inches and the embodiment of the present invention shown in FIGS. **1** and **2** will pump 136 gallons per minute at 2400 psia.

At this point, it is important to note that reciprocating hydraulic pistons and cylinders are an inherently efficient way to move fluids. They do not leak to any measurable degree and can achieve efficiencies in excess of 90 percent. It should also be noted that, no single prior art pump known to the inventor is capable of producing output volume and pressure ranges as great as the present invention. Normally a rotary impeller or centrifugal pump would be used to pump 3,264 gallons per minute at 100 psia while a reciprocating pump would be required to produce 136 gallons per minute at 2400 psia. Further, it would be virtually impossible to drive these two pumps from the same prime mover, i.e., with the same input speed and torque.

FIG. **3** shows crankshaft adjusting mechanism **224** in detail. In this Figure, similar numbers indicate similar structures to those in FIG. **2**.

Bearing **312** is attached to block **218** and engages the bottom and a portion of the outer surface of cylinder block assembly **244**.

Outer screw **228** engages an upper bearing **410** and a lower bearing **412**. Rear screw threaded member **230** engages an upper bearing **414** and a lower bearing **416**. Shaft **418** connects threaded member **230** to rear vertical spur gear **420**, which, in turn, is connected through rear horizontal spur gear **422** to shaft **424** of reversible motor **226**. The other output of reversible motor **226** is connected through shaft **426** and frontal horizontal spur gear **428** to frontal vertical spur gear **430**. Frontal vertical gear **430** is connected through vertical shaft **432** to screw threaded member **228**.

Crankshaft **234** is equipped with four bearing surfaces such as the one surrounded by crankshaft bearing **262** of connecting rod **260**. Crankshaft assembly **234** is connected to a sliding bearing assembly having a first threaded opening **434** that engages screw thread **228**, a middle power bearing opening **436** that engages bearing member **232** in slidably close contact, and a rear screw threaded opening **438** that engages rear screw threaded member **230**.

For the purpose of the present invention threads **228**, **230** taken together with bearing block **232** forms a lever arm whose fulcrum is in the center of offset crankshaft assembly **224**. This center coincides with the center of rotation of structure **224**. The center of structure **224** is referred to as the center of rotation because the cylinder assemblies of the present invention rotate about it. It is recognized that the crankshaft assembly is stationary. For convenience the center portion of crankshaft assembly **224** is referred to as a fulcrum for the purpose of this application. As offset crankshaft **234** comes close to this fulcrum, less reaction force is transmitted through the lever arm to block **218**. As crankshaft **234** moves away from this fulcrum, then the reaction force impressed by the lever arm made up of screws **228**, **230** and bearing **232** impress more reaction force on block **218**. Motor **226** is the adjustment means for altering the distance between the point at which the lever arm formed by screw threads **228**, **230** and bearing block **232** engages connecting rod **234** and the lever arm's fulcrum as heretofore described as the center of rotation of assembly **224**.

Functionally, electric current from control line **328** causes motor **226** to rotate spur gears **428** and **422**. The rotation of spur gears **428** and **422** causes the rotation of spur gears **430** and **420** and thus causes the rotation of threaded members **228** and **230**, respectively. Threaded members **228** and **230** engage matingly threaded openings **434** and **438** attached to crankshaft **234** and, depending on the direction of their rotation, drive crankshaft **234** toward and away from motor **226**. Movement of crankshaft **234** varies the mechanical advantage of the present invention.

Screw threads **228** and **230** move crankshaft **234** up and down. Bearings **436** and **232** withstand the mechanical stress imposed by the crankshaft by the moving cylinders.

FIG. **4** is a view of FIG. **3** taken along section lines **4—4**. FIG. **4** shows a cross-sectional view of the portion of crankshaft assembly **234** that interacts with threaded members **228** and **230** and bearing structure **232**. In FIG. **4**, similar numbers indicate similar structures to those used in FIGS. **2** and **3**.

FIG. **5** shows a detail of the hydraulic coupling between hydraulic conduit shaft **294** and annular hydraulic fluid coupling means **304**. Similar numbers indicate similar structures to FIG. **2**.

In FIG. **5** a solid steel drive shaft **284** is positioned annularly internal to two hemi-cylindrical fluid passageways, one of which is designated **296**. The entire structure, i.e., two hemi-cylindrical shafts and the steel shaft, are referred to as conduit structure **294**. The portion of shaft **294** engaging annularly hydraulic coupling **304** is equipped with an opening **502** that places the interior **504** of hydraulic coupling **304** in fluid communication with hemi-cylindrical conduit **302**. As this opening rotates with the piston assembly of the present invention, it always stays within annular fluid cavity **504**.

Hydraulic coupling **304** is equipped with bearing surfaces **506** that annularly surround conduit means **294** to produce an annular fluid-tight seal about chamber **504**.

Fluid coupling **304** is connected by welding, bolting or any other convenient means to fluid support posts **308**. Annular fluid channel **504** is in fluid communication with supply line **306**.

Many ways of coupling stationary hydraulic supplies or sumps to rotating hydraulic machinery are well known to those skilled in the art of hydraulic engineer-

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 13 of 18

ing. The present embodiment is shown as a convenience only and is not intended to be limiting.

FIG. **6** is a view taken along section lines **6—6** of FIG. **5**. The purpose of FIG. **6** is to indicate the construction of the hemi-cylindrical fluid passages used in the preferred embodiment of the present invention.

In FIG. **6** a central drive shaft **284** is surrounded by conduit shell **294**. Partitions **602** and **604** divide the annulus between outer shell **294** and inner core **284** in two hemi-cylindrical passageways, one of which is hemi-cylindrical passageway **296** discussed in connection with FIG. **5**, above, while the other is hemi-cylindrical passageway **302** described in connection with FIG. **2**, above.

These shafts, passageways and dividers may be made of any convenient material capable of withstanding the hydraulic pressure utilized by the present invention, for example, steel or titanium.

To operate the preferred embodiment of the present invention as described in FIGS. **2** through **6**, above, as a hydraulic motor, a hydraulic source is connected to line **306** and hydraulic fluid flows through this line, coupling **304**, cylindrical conduit **296**, fitting **258**, line **256**, manifold **250**, and valve **248** into cylinder **244**.

Piston **242** is forced down by the pressurized fluid causing the cylinder assembly of the present invention to rotate. This rotation is imparted through flange assembly **288** to drive shaft **284**. Drive shaft **284** can then be coupled to any desired load, e.g., an electric generator, or even to another piece of hydraulic machinery, as will be discussed in connection with FIG. **7**, below.

A valve control means capable of opening inlet valve **250** during the downward power stroke of piston **242** and of opening outlet valve **252** during the upward exhaust stroke of piston **242** must be provided for the present invention to operate as a hydraulic motor. The operation of these valves could be hydraulic, mechanical or electrical, but they must be positive action valves not actuated by the internal pressure within cylinder **244**. Further, each of the four cylinders of the embodiment shown in FIGS. **1** and **2** of the present invention must be equipped with such valves and the valves must be controlled to open and close at the proper time to deliver hydraulic fluid to the pistons during their downward power stroke and to exhaust hydraulic fluid under virtually zero pressure to a sump during the exhaust stroke.

These valves and their timing means have been omitted from the present invention because they can be made and used by anyone who has ordinary skill in the art of mechanical or hydraulic engineering.

The inventor prefers to use a series of mechanical valves using rockers arms and pushrods very similar to those used in an automobile. In the present case, however, no cam shaft is needed, but rather appropriate cams are constructed on the outer surface of crankshaft block assembly **218**.

Exhausted hydraulic fluid flows out of the exhaust valves of the respective cylinders into output manifold **254**, thence through exhaust line **274**, hemi-cylindrical conduit **302**, coupling **298** and line **300**.

Motor Example

Referring to the pump example described above, if 100 psia fluid at 3,264 gallons per minute drives the preferred embodiment of the present invention shown in FIG. **2** as a hydraulic motor, then each stroke of each cylinder will utilize 8.16 gallons per stroke when the stroke length is set at 24 inches. Four cylinders would thus use 32.64 gallons per revolution. Thus input of 3,264 gallons per minute would drive the motor at 100 rpm.

If the stroke length is decreased to 6 inches, then each stroke of each cylinder uses 2.04 gallons for a total of 8.16 gallons per revolution of the cylinder assembly. This yields an rpm of 400, necessarily at a torque approximately one-quarter of the torque the present invention yields at 100 rpm.

Again the power carried out of the present invention when it is operating as a hydraulic motor by output shaft **284** will be equal to the incoming hydraulic power, less frictional losses, which should be only on the order of 10%.

The output rpm and torque, however, may be varied, these two variables always being inversely related to each other, within wide limits by varying the mechanical advantage of the system.

FIG. **7** shows a schematic diagram of two motor/-pumps constructed according to the preferred embodiment of the present invention described above that are mechanically connected together to form a hydraulic variable transformer.

A hydraulic variable transformer is the hydraulic analog of an electrical variable transformer.

An ordinary electric transformer works by introducing a first voltage and current into primary coil windings. This first voltage and current generates an electromagnetic (EM) field. The EM field interacts with secondary coil windings to generate an electric voltage and current. The voltage in the second winding is directly proportional to the voltage introduced into the first coil times the ratio of the number of turns in the secondary coil to the number of turns in the primary coil. The current in the secondary windings is directly related to the current in the primary windings and inversely related to the ratio of the number of turns in the secondary of the transformer to the number of turns in the primary coil.

An electrical variable transformer utilizes a moving tap to change the number of turns in the secondary winding of the transformer thus altering the ratio of the secondary turns to primary turns in the transformer. Again, for a constant voltage and current input, the adjustable nature of the variable transformer allows a greater or lesser voltage to be output from the secondary coil windings, always with the proviso that the current output is inadversely related to the voltage output such that the output power from the secondary, (power being current times voltage) is always equal to the input less power hysteresis losses. Hysteresis losses in an electrical machine are analogous to frictional losses in a hydraulic machine.

The present invention is a highly efficient motor/-pump having a variable mechanical advantage. The efficiency range of the present invention both as a pump and a hydraulic motor can be over 90 percent. Thus, if two units constructed according to the preferred embodiment of the present invention are connected together mechanically such that one acts as a motor driving the other, which acts as a pump, then the resultant device functions as a hydraulic equivalent of the electrical variable transformer.

Specifically with respect to FIG. **7**, hydraulic motor **710** constructed according to the preferred embodiment of the present invention is connected by means of shaft **712** to drive pump **714**, which is a pump constructed

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 14 of 18

according to the preferred embodiment of the present invention.

Hydraulic motor **710** has a control assembly **716** capable of varying its mechanical efficiency as described above. Pump **714** has a control assembly **718** capable of altering its mechanical advantages as described above. Input-output pair **720** delivers hydraulic fluid from and to hydraulic motor **710** through fluid coupling **722**. Input-output pair **724** delivers hydraulic fluid to and from pump **714** through fluid coupling **722**.

Functionally, fluid is introduced to hydraulic motor **710** at a given flow rate and pressure through input-output line **720** and hydraulic coupling **722**. This hydraulic power supply drives motor **710** at a characteristic rotational speed and torque, which depend on the input flow rate, pressure and the setting of control **716**. The rotational output of motor **710** drives pump **714** through drive shaft **712**. Pump **714** generates a pressure and flow rate of hydraulic output, said pressure and flow rate depending on the torque and speed of shaft **712** and on the setting of control **718**. This hydraulic output exits pump **714** through input-output line **724**.

Within design limits dictated by the physical parameters of pump **714** and hydraulic motor **710**, it is possible for a given flow rate and pressure of fluid input to the hydraulic motor **710** to produce a wide range of pressures or flow rates from hydraulic pump **714**.

Another embodiment of the present invention is a positively driven, infinitely variable hydromechanical transmission. In this embodiment, shaft **712** joining motor **710** and pump **714** is severed and a remote prime mover, not shown, drives hydraulic pump **714**. The hydraulic connection to pump **714**, i.e., hydraulic lines **724**, are connected to hydraulic lines **720**, which drive hydraulic motor **710**. The portion of shaft **712** associated with hydraulic motor **710** can then be used to drive a remote load, not shown. Functionally, by varying the degree of mechanical advantage in pump **714** and motor **710**, a given rotational speed and torque input to pump **714** can produce a very wide range, and more importantly an infinitely variable, positively coupled range, of output speeds and torques from hydraulic motor **710**. By saying that the transmission built according to the above description is "positively coupled" is meant that the fluids pumped by pump **714** and used to drive motor **710** is essentially incompressable. Thus any mechanical movement of the fluid caused by pump **714** will result in a corresponding non-slipping mechanical movement in hydraulic motor **710**. Infinitely variable hydraulic transmissions are known, but they depend for their effectiveness on the viscosity of a liquid such as the automatic transmission used in most modern cars. They are not positively coupled transmissions.

The only limitations on the system are those dictated by its physical construction, i.e., the size of the pistons, volume of the cylinders, degree of stroke variability permitted by the design of the crankshaft assembly, etc. and the losses caused by fluid and other frictional interactions within pump **714** and hydraulic motor **710**. Also, the hydraulic power output of pump **714**, regardless of its flow rate or pressure, cannot be greater than the power input to hydraulic motor **710**, regardless of its flow rate of pressure, less frictional losses.

By connecting flow sensors and pressure sensors to input-output lines **720** and **724** control units **716** and **718** may be automatically operated by means of negative feedback servo-circuits to obtain a desired output from pump **714** while holding the supply pressure and flow rate to hydraulic motor **710** constant. Alternatively, hydraulic motor **710** could be fed an erratic hydraulic supply, one that varies in pressure and/or flow rate, and the servo-circuit could maintain negative feedback control such that the output of pump **714** would be at a constant flow rate of pressure. The construction of such servo-circuits is well within the state of the art and their use with the present invention would result in a hydraulic equivalent of an electrical auto or "constant voltage" transformer. Such a device, especially one that operates at the high efficiencies allowed by the present invention, could be extremely useful in conditioning erratic hydraulic power surges from wave or wind generators to provide constant output pressure required to drive conventional turbines such as a Pelton wheel turbine.

FIG. **8** shows an embodiment of the present invention used to vary the mechanical advantage of a reciprocating pump system. This system is used to condition power output from a wave generator. The wave generator is similar to the one taught by U.S. Pat. No. 4,077,213.

In FIG. **8** a wave generating facility comprises a fixed point **810** coupled to a first float **812** through a hinge **814**. Float **812** is connected through a second hinge **816** to a second float **818**. These floats may be rafts approximately 10 feet thick and 50 feet long. Their size varies as described in U.S. Pat. No. 4,077,213 to produce an array capable of absorbing energy from a variety of different wave lengths of ocean waves.

As is shown in FIG. **8A**, the sea state (the rafts ride approximately half submerged) causes perturbation of the float **818** with respect to float **812** about hinge **816** of approximately 10 degrees.

A hinged hydraulic cylinder **822** is connected at its rear by hinge **824** to the upper surface of float **812** by bolting, welding or other means. Hydraulic cylinder **822** has a shaft **826** that is attached to support framework **828** at hinge point **830**.

Variable height structure **828** is shown in FIG. **8A** at a length "l" above the top surface of float **818**. Support structure **828** comprises a pair of cylinder bearings **832** that are sized to be capable of carrying the force that is transmitted to them by the movement of float **818** via shaft **826** and thence to hydraulic cylinder **822**.

A second hydraulic cylinder **834** has its hydraulic shaft attached to support mechanism **828** and is adapted to controllably raise and lower the mechanism.

FIG. **8B**, in which like numbers indicate like structures, shows the wave generator comprised of stationary point **810** and floats **812** and **818** in a sea state where float **818** is perturbed to a maximum deflection of 90 degrees with respect to float **812** about hinge **816**. As shown in FIG. **8B**, hydraulic cylinder **834** has lifted support structure **828** so shaft **826** moves through a much longer stroke "S" than it did in FIG. **8A**.

Functionally, any perturbation of float **818** perturbs attachment point **830** of support structure **828** and shaft **826** to a greater or lesser degree, depending on the elevation of attachment point **830** above the surface of float **818**. The height of this attachment point, and thus the mechanical advantage of the system, is variable depending on the degree of extension of hydraulic cylinder **834**.

If the sea state is as shown in FIG. **8A**, i.e., a small amount of ripple inducing a movement of approximately 10 degrees total about joint **816**, then cylinder **834** stays retracted and the 10 degree movement of point **830** causes only a very small movement in shaft

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 15 of 18

826. Hydraulic cylinder 822 thus pumps only a small amount of fluid.

As wave action increases, the deflection of float 818 with respect to float 812 about joint 816 increases. The present invention teaches the varying of the mechanical advantage used to actuate hydraulic cylinder 822 by increasing the length "l" so as to maintain, preferably, a constant pressure while increasing the flow rate out of the cylinder. Cylinder 822 is a double action hydraulic cylinder and it is desirable to maintain a constant pressure out of it to drive a Pelton wheel turbine, which is essentially a constant pressure device. Clearly a mere change in operating rationale would allow a constant flow rate to be maintained at a variable pressure.

Looking now to FIG. 9, and in conjunction with FIGS. 8A and 8B, it will be noted that FIG. 9 is a table that lists the following quantities from left to right for a wave generator built according to FIG. 8 and U.S. Pat. No. 4,077,213. The table assumes the piston has a one-square meter surface and operates at a constant pressure of 100 kilograms per square centimeter (approximately 1400 pounds). From left to right the columns in FIG. 9 are defined as follows:

Theta equals the number of degrees of total average perturbation per cycle experienced by float 818 with respect to float 812. As such, it also defines the arc of movement described by the top of lifting structure 830 with respect to shaft 826. (Actually this is an approximation, but if the hydraulic cylinder is located near the end of the raft compared to its overall length, then the approximation will be acceptable.)

Stroke "s" is the distance, in centimeters, traveled by shaft 826.

Length "l" is the length, in centimeters, that the top of structure 828, and thus joint 830, is above the surface of float 818.

Average hydraulic power "KWH" is the number of kilowatt hours of hydraulic power generated by cylinder 112 during a single perturbation of float 818.

For a hydraulic cylinder operating at 100 kilograms per square centimeter and having a total piston surface area of 10,000 square centimeters, the minimum stroke of 5 centimeters (about 2 inches) occurs when joint 830 is about 2 feet (57 centimeters) off the deck of float 818. This stroke yields an average hydraulic power output of 0.12 KWH.

For the same system operating under very turbulent sea states, i.e., a maximum perturbation of 90 degrees, float 818 would generate a stroke of 300 centimeters (approximately 10 feet), if the mechanical advantage of the system were varied by lifting attachment point 830, 392 centimeters (about 12.8 feet) off the surface of float 818. This 300 centimeter stroke generates 9.5 KWH.

Another way to state this is that the minimum stroke described above generates a flow of 50 liters of fluid at about 1400 psi while the maximum stroke described above, generates 3000 liters of fluid flow at this pressure. In terms of power, if waves strike the raft assembly so as to perturb the raft through its maximum deflection three times per minute, then a 10 degree average perturbation results in an average power output of 21.6 KW per piston and the maximum perturbation of 90% results in the output of 1,711 megawatts per piston.

If the float array described in connection with U.S. Pat. No. 4,077,213 was equipped with 1000 pistons constructed according to the preferred embodiment of the present invention shown in FIGS. 8A and 8B and this array was operated at 100 kg/cm^2 and each piston had one meter of surface area, then at 10 degree perturbation, the system would produce an average of 21 megawatts continuous and at maximum perturbation of 90 degrees, the system would produce 1711 megawatts continuous.

The embodiment of the present invention described in connnection with FIG. 8 above teaches a means for changing the mechanical advantage of a power absorption system on a wave generator such that a one-to-seven length change in the height of support structure 828 causes one-to-sixty power absorption change by cylinder 822.

The preferred embodiment of the present invention operating on a wave generator would have some means of sensing wave height in advance of the wave striking the float array. This means could be an independent sensor riding ahead of the raft assembly or could be an optical sensor. Once the wave height is known, then a computer could calculate the expected deflection of the rafts based on the rafts' known response to different wave heights and a servo-circuit would adjust the height of holding assembly 828, and thus the mechanical advantage of the power extraction system, so double action cylinder 822 would output a constant pressure output.

A system such as the system described above could be placed under computer control to tune a wave generator to the power spectrum of incoming waves.

FIG. 10 shows an embodiment of the present invention wherein the mechanical advantage between a hydraulic cylinder acting as a motor and a hydraulic cylinder acting as a pump is varied by changing the fulcrum position of the connecting linkage between the two parallel hydraulic cylinder actuating rods.

Structurally, wall or fixed mounting 1002 is provided with two spaced apart pivotal hydraulic cylinder mountings, i.e., first hydraulic cylinder mounting pivot 1004 and second hydraulic cylinder pivot mount 1006. Pivot flange 1008 on the back of hydraulic cylinder 1010 is connected by means of bearing 1012 to pivot mount 1004.

Hydraulic cylinder swivel flange 1014 of hydraulic cylinder 1016 is connected by means of bearing 1018 to mounting pivot mount 1006.

In the preferred embodiment of the present invention bearings 1012, 1018 are adapted to allow their respective hydraulic cylinders one degree of rotational freedom, i.e., the cylinders are constrained to swing through an arc within the plane of the drawing as shown in FIG. 10.

Water source line 1020 is in fluid communication with the water source, not shown. Line 1020 is also in fluid communication through check valve 1022 with forward portion 1026 of double acting cylinder 1016. Line 1020 is also in fluid communication through check valve 1024 with the rear interior space 1028 of cylinder 1016. A piston 1030 is movably disposed within cylinder 1016. Annular seal rings 1032 place the perimeter of piston 1030 in sealing contact with the interior walls of cylinder 1016. Piston 1030 is connected via central wrist pin 1034 to hydraulic pump shaft 1036.

Forward portion 1026 of hydraulic cylinder 1016 is in fluid communication through check valve 1038 with pressurized water output line 1040. Rear portion 1028 of double acting hydraulic cylinder 1016 is in fluid communication through check valve 1042 with hydraulic output line 1040.

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 16 of 18

Hydraulic pump actuator shaft **1036** has a forward magnetized portion **1044**, which is located at that point on shaft **1036** that will pass under limit switch **1046** when piston **1030** reaches the rear wall of cylinder **1016**. Shaft **1036** also has a second magnetized region **1046** located on said shaft so as to pass under limit switch **1048** when piston **1030** reaches the front wall of cylinder **1016**. Limit switch **1046**, which in the preferred embodiment of the present invention is a magnetic reed switch set close enough to shaft **1036** to be actuated by magnetized regions **1044** and **1046**. Magnetic reed switch **1048** is connected by electrical control line **1050** to control logic **1052**.

The forward end of actuating rod **1036** is connected via bearing **1054** to end **1055** of transverse rocker arm **1056**. The other end **1058** of rocker arm **1056** is connected by bearing **1060** to hydraulic motor arm **1062**.

Hydraulic motor arm **1062** is equipped with a forward magnetized region **1064** which is located on shaft **1062** so as to lie under and proximate limit switch **1066** when piston **1068** is proximate the rear wall of cylinder **1010**. Shaft **1062** has a second magnetized region **1070** which is located on shaft **1062** so as to be proximate limit switch **1066** when piston **1068** reaches the forward wall of cylinder **1010**.

Piston **1068** is movably disposed within cylinder **1010** and its outer perimeter is adapted to carry sealing rings **1072** which place its outer perimeter in sealing contact with the interior wall of cylinder **1010**. Forward portion **1074** of the interior of cylinder **1010** is in fluid communication by line **1076** with valve assembly **1078**. The rear interior portion **1080** of cylinder **1010** is in fluid communication with valve **1078** through hydraulic line **1082**. Valve **1078** is in fluid communication with hydraulic pressure source, not shown, via line **1084**. Valve **1078** is in fluid communication via line **1086** with a hydraulic sump, not shown.

Limit switch **1066** is electrically connected via line **1088** to control logic assembly **1052**. Control logic assembly **1052** is in electrical command communication with valve **1078** by means of command line **1090**.

Control logic **1052** is any logic circuit capable of putting out a change of state command signal to valve **1078** when switch **1048** senses magnetized region **1044** or **1046**, or limit switch **1066** senses magnetized region **1064** or **1070**. Valve **1078** is any valve that, on reception of a change of state signal from control logic **1052**, alters the hydraulic connections of lines **1076** and **1082** to lines **1086** and **1084** so as to reverse the motion of piston **1068** in cylinder **1010**.

Mounting surface **1092** has a spaced apart first mount **1094** affixed to it by weld **1096** and second mounting means **1098** spaced apart from **1094** and affixed to it by weld **1100**, or any equivalent mounting means. Geared cylindrical bearing surface **1102** is affixed at its upper end **1104** to mounting means **1098** and at its lower end **1106** to mounting means **1094**. Movable fulcrum assembly **1108** includes a cylindrical bearing **1110** adapted to slidably engage cylindrical bearing surface **1102**. A motor **1112** drives a worm gear **1114**. Worm gear **1114** drives idler gear **1116**, which engages the geared portion **1118** of bearing surface **1102**. Motor **1112** is a reversible electric motor connected by control line **1120** to reversible motor controller **1122**, which is actuated by control lever **1124**.

Bearing **1110** is attached on its other side by any convenient means to roller bearing variable fulcrum assembly **1126**. Within bearing fulcrum assembly **1126** a first roller bearing assembly **1128** is located on the side of rod **1056** near motor **1112** and a second roller bearing **1130** is located within fulcrum assembly **1126** on the side of rod **1056** opposite bearing **1128**.

Functionally, a hydraulic source, not shown, is connected in fluid communication through line **1084**, valve **1078**, and line **1076** to the interior forward portion **1074** of cylinder **1010**. Simultaneously a rear portion **1080** of cylinder **1010** is connected through hydraulic line **1082** and valve **1078** to hydraulic sump **1086**. The pressure difference between the hydraulic source and the hydraulic sump causes piston **1068** to move toward the rear of cylinder **1010**. This movement continues until magnetized portion **1064** on shaft **1062** actuates limit switch **1066**.

Upon actuation, limit switch **1066** sends a signal through line **1088** to control logic **1052**. Upon receiving this signal, control logic **1052** sends a change of state command through command interface line **1090** to valve **1078**.

As shaft **1062** has moved into cylinder **1010**, this movement has been transmitted through bearing **1060** and rocker arm **1056** to pump actuator arm **1036**. The movement of pump actuator arm **1036** will be in the direction opposite the movement of motor arm **1062**, thus piston **1030** will move toward the front of cylinder **1016**.

As piston **1030** moves to the front of cylinder **1016**, water is drawn into rear space **1028** inside cylinder **1016** through check valve **1024** from line **1020** and the water source, not shown. Simultaneously, water is forced out of the forward portion **1026** of cylinder **1016** through check valve **1038** and into line **1040** to the pressurized water output.

When fulcrum assembly **1108** is approximately in the center of track **1102**, and thus in the center of rod **1056**, then magnetized region **1046** on shaft **1036** will actuate limit switch **1048** at the same time as magnetized region **1064** actuates limit switch **1066**.

It will be clear to those skilled in the art of hydraulic control that the function of magnetized regions **1044**, **1046**, **1064**, and **1070** and limit switches **1066**, **1048** are to change the state of motion of the motor piston whenever either the motor piston **1068** or the pump piston **1030** reaches the end of its cylinder. As is clearly shown in FIG. **10**, if fulcrum point **1108** is moved toward side **1055** of rod **1056**, then limit switch **1066** will act to switch control logic **1052** and valve **1078** because rod **1062** is on the longer end of the lever arm formed by rocker arm **1056** and fulcrum **1108**. When the embodiment of the present invention shown in FIG. **10** is in this state, then motor piston **1068**, and hence motor shaft **1062**, will be moving through a relatively long stroke compared to pump shaft **1036** and pump piston **1030**. This will allow relatively low pressure hydraulic fluid to pump relatively high pressure water. Of course the flow rate of hydraulic fluid through motor cylinder **1010** will be inversely proportional to the flow rate of water through pump cylinder **1016**.

Once motor piston **1068** reaches its forward limit of travel and limit switch **1066** causes the state of valve **1078** to shift, then space **1080** will be connected through line **1082**, valve **1078**, and line **1084** to the hydraulic pressure source and space **1074** of cylinder **1010** will be connected to the hydraulic sump. This arrangement will cause piston **1068** to move forward toward the front of cylinder **1010** and, as was described above, fulcrum point **1108** and lever arm **1056**, as shown in FIG. **10**,

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 17 of 18

will cause pump piston **1030** to move from its forward position toward the rear of cylinder **1016**. As piston **1030** moves to the rear of cylinder **1016**, water is drawn in through line **1020** and valve **1022** to forward portion **1026** of cylinder **1016**. Simultaneously, water is forced out of portion **1028** of cylinder **1016** through valve **1042** and line **1040** to the pressurized water output.

When lever **1124** is pushed forward, motor control **1122** sends a signal through line **1120** to motor **1112** that causes worm gear **1114** to rotate so as to cause idler gear **1116** to rotate in the direction that causes fulcrum assembly **1108** to move up track **1102** so that the fulcrum bearings **1128, 1130** are closer to end **1058** of shaft **1056**. This action alters the mechanical advantage of the system described in FIG. **10** by allowing a smaller stroke of motor piston **1068** to act through the lever arm formed between fulcrum **1108** and bearing **1054** so as to cause excursions in pump arm **1036** sufficient to drive the magnetized portion of the arm under the limit switch and thus switch the direction of motor operation. In this configuration a relatively small amount of high pressure fluid flowing through motor cylinder **1010** will drive a larger volume of relatively lower pressure fluid of the pressurized water output of pump cylinder **1016**.

Conversely, if lever **1124** is pulled down, then motor control **1122** sends a signal to motor **1112** that causes worm gear **1114** to rotate in the opposite direction, which drives the fulcrum **1108** toward end **1055** of shaft **1056**. In this configuration a relatively long stroke on the part of motor piston **1068** drives shaft **1062** to and from its limits. This long movement on the part of shaft **1062** causes a relatively shorter movement of shaft **1036**. The result is that a relatively low pressure, high volume flow of hydraulic fluid through motor cylinder **1010** will result in the flow of a relatively smaller amount of higher pressure water out of pump cylinder **1016**.

The embodiment of the present invention illustrated by FIG. **10** in the above discussion is relatively simple to build and its mechanical advantage can be altered while it is in operation. It should be noted that the hydraulic motor may be run on hydraulic fluid, which is a good lubricant, and may be desirable for placement on offshore wave generating facilities where a closed loop system is desirable for maintenance and lubrication purposes, while the pump system uses a water source and outputs pressurized water, which may be desirable for use on wave generator systems because a Pelton wheel hydraulic turbine operates well on water and filtered ocean water can be used as an open system, thus avoiding the need for the expense of return piping. This system also avoids the possibility of contaminating the ocean with hydrocarbons on the long hydraulic runs from many cylinders to the central hydraulic turbogenerator on a wave generator facility.

The above-described preferred embodiments of the present invention should not be taken as limiting. They describe only a few of the ways a person skilled in the art of mechanical and hydraulic engineering could make use of the present invention. Therefore, the present invention should be limited only by the following claims and their legal equivalents.

I claim:

1. An apparatus including an expandable chamber device which is capable of being operated as a hydraulic motor or pump attached by a reciprocating connecting rod to a crankshaft which includes an adjustment means to alter the distance between the point at which the connecting rod engages the crankshaft and the center of rotation of the expandable chamber device, said adjustment means comprising at least one screw which threadably, movably, orthogonally engages a portion of said crankshaft, said screw being operably connected to a remote controlled prime mover capable of reversibly rotating said screw in such a manner as to position said crankshaft at a distance between the point at which said crankshaft engages said connecting rod and the center of rotation of the expandable chamber device which said hydraulic motor or pump is operating, the improvement comprising:

said adjustment means including at least one bearing shaft closely, slidably engaging the interior of an opening in a portion of said crankshaft.

2. An apparatus comprising:

a hydraulic motor having a reciprocating motor rod, said motor rod having a limit of travel,

a hydraulic pump having a reciprocating pump rod, said pump rod having a limit of travel,

a rocker lever arm having two ends, one said end engaging said motor rod and the other said end engaging said pump motor rod, a fulcrum means located functionally adjacent said rocker lever arm between said motor rod end and said pump rod end for forcing motion of said motor rod end of said lever arm to cause movement of said pump rod end of said lever arm, said fulcrum means comprising, a fulcrum bearing surrounding said lever arm; a housing pivotally holding said fulcrum bearing; a linear bearing track closely, slidingly engaging a second linear bearing portion of said housing, said bearing track having a geared portion; and a controllably reversible prime mover attached to said housing, said mover controllably and reversibly actuating rotation of the gear that engages the gear portion of said bearing track, whereby said housing and said fulcrum bearing are controllably moveable along said bearing track,

sensing means responsive to the position of said pump rod and said motor rod for sensing when said pump rod or motor rod reaches its limit of travel, and

control means responsive to said sensing means for reversing the direction of travel of said motor when said sensing means senses that said motor rod or said pump rod reaches its limit of travel.

3. An apparatus as in claim **2** wherein said geared bearing track is substantially parallel to said lever arm when said reciprocating motor arm is midway between its limits of travel.

* * * * *

U.S. Well - Exhibit 2072
Liberty v. U.S. Well - IPR2024-01274
Page 18 of 18