



US009586659B2

(12) **United States Patent**
Langelaan

(10) **Patent No.:** **US 9,586,659 B2**
(45) **Date of Patent:** ***Mar. 7, 2017**

(54) **POWERED HYDROFOIL BOARD**

USPC 114/74
See application file for complete search history.

(71) Applicant: **Jacob Willem Langelaan**, State
College, PA (US)

(56) **References Cited**

(72) Inventor: **Jacob Willem Langelaan**, State
College, PA (US)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

293,133 A 2/1884 Applegate
322,712 A 7/1885 Harris
(Continued)

This patent is subject to a terminal dis-
claimer.

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **15/064,521**

CH 591358 A5 9/1977
CN 202264871 U 6/2012
(Continued)

(22) Filed: **Mar. 8, 2016**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

US 2016/0185430 A1 Jun. 30, 2016

U.S. Appl. No. 14/509,289, Examiner Interview Summary mailed
Nov. 18, 2015, 3 pgs.

(Continued)

Related U.S. Application Data

(63) Continuation of application No. 14/509,289, filed on
Oct. 8, 2014, now Pat. No. 9,359,044.

(Continued)

Primary Examiner — Lars A Olson

Assistant Examiner — Jovon Hayes

(74) *Attorney, Agent, or Firm* — Schwegman Lundberg &
Woessner, P.A.

(51) **Int. Cl.**

B63B 35/79 (2006.01)
B63B 1/24 (2006.01)
B63H 11/04 (2006.01)
B63H 1/16 (2006.01)
B63H 21/17 (2006.01)

(Continued)

(57)

ABSTRACT

A passively stable personal hydrofoil watercraft that has a flotation device, wherein a user can ride in a prone, kneeling, or standing position. The watercraft includes a strut having an upper end interconnected with the flotation device and lower end connected with a hydrofoil. The hydrofoil greatly reduces the power required to travel at higher speed. The watercraft also includes a propulsion system connected to the hydrofoil. Both longitudinal and directional control of the watercraft is via weight shift, eliminating the need of any movable surfaces. The flotation device, strut, and hydrofoil may be permanently interconnected or may be detachable.


(52) **U.S. Cl.**

CPC **B63B 35/79** (2013.01); **B63B 1/248**
(2013.01); **B63B 35/7926** (2013.01); **B63B**
35/7943 (2013.01); **B63H 1/16** (2013.01);
B63H 5/14 (2013.01); **B63H 11/04** (2013.01);
B63H 21/17 (2013.01); **B63H 21/21** (2013.01)

(58) **Field of Classification Search**

CPC B63B 1/248

20 Claims, 4 Drawing Sheets

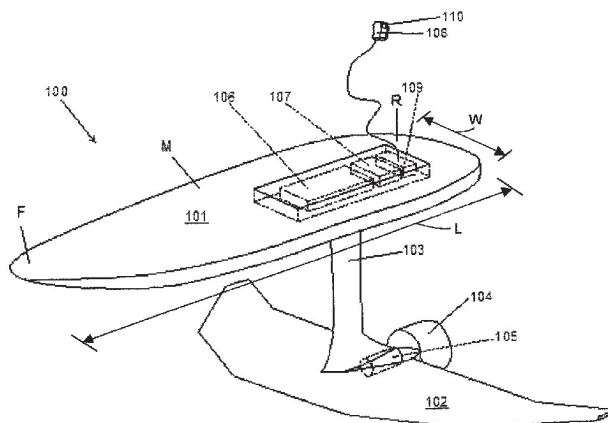

BRP 1001

US 9,586,659 B2

Page 2

Related U.S. Application Data				6,702,634	B2	3/2004	Jung		
				6,901,872 <th>B1</th> <th>6/2005</th> <th>Battle et al.</th> <td></td>	B1	6/2005	Battle et al.		
(60)	Provisional application No. 61/889,071, filed on Oct. 10, 2013.			7,047,901 <th>B2 *</th> <th>5/2006</th> <th>Chen</th> <td>B63B 1/246 114/274</td>	B2 *	5/2006	Chen	B63B 1/246 114/274	
				7,089,875 <th>B2</th> <th>8/2006</th> <th>Kurze</th> <td></td>	B2	8/2006	Kurze		
(51)	Int. Cl.			7,144,285 <th>B1</th> <th>12/2006</th> <th>Hendricks</th> <td></td>	B1	12/2006	Hendricks		
	B63H 21/21	(2006.01)		7,207,282 <th>B1</th> <th>4/2007</th> <th>Ruan et al.</th> <td></td>	B1	4/2007	Ruan et al.		
	B63H 5/14	(2006.01)		7,232,350 <th>B1</th> <th>6/2007</th> <th>Krah et al.</th> <td></td>	B1	6/2007	Krah et al.		
				7,232,355 <th>B2 *</th> <th>6/2007</th> <th>Woolley</th> <td>B63B 1/248 114/253</td>	B2 *	6/2007	Woolley	B63B 1/248 114/253	
(56)	References Cited			7,298,056 <th>B2</th> <th>11/2007</th> <th>Gizara</th> <td></td>	B2	11/2007	Gizara		
				7,731,555 <th>B2 *</th> <th>6/2010</th> <th>Railey</th> <td>B63B 35/7943 440/6</td>	B2 *	6/2010	Railey	B63B 35/7943 440/6	
	U.S. PATENT DOCUMENTS			7,832,349 <th>B2 *</th> <th>11/2010</th> <th>Dansie</th> <td>B63B 1/24 114/274</td>	B2 *	11/2010	Dansie	B63B 1/24 114/274	
	326,241	A	9/1885	Preston	7,854,637 <th>B2 *</th> <th>12/2010</th> <td>Schultz, deceased et al.</td> <td>B63H 5/14 440/67</td>	B2 *	12/2010	Schultz, deceased et al.	B63H 5/14 440/67
	374,713	A	12/1887	Smith					
	427,435	A	5/1890	Manville	7,930,985 <td>B2</td> <td>4/2011</td> <td>Walworth et al.</td> <td></td>	B2	4/2011	Walworth et al.	
	497,158	A	5/1893	Allen	7,963,814 <td>B2</td> <td>6/2011</td> <td>Grimmeisen</td> <td></td>	B2	6/2011	Grimmeisen	
	506,237	A	10/1893	Kinsman et al.	8,636,552 <td>B2</td> <td>1/2014</td> <td>Braden et al.</td> <td></td>	B2	1/2014	Braden et al.	
	619,281	A	2/1899	Cornish	8,702,458 <td>B2</td> <td>4/2014</td> <td>Preston</td> <td></td>	B2	4/2014	Preston	
	670,263	A	3/1901	Whiton	8,870,614 <td>B2</td> <td>10/2014</td> <td>Railey</td> <td></td>	B2	10/2014	Railey	
	704,790	A	7/1902	Gillinder et al.	9,060,385 <td>B1</td> <td>6/2015</td> <td>Manning</td> <td></td>	B1	6/2015	Manning	
	714,428	A	11/1902	Wirth	9,359,044 <td>B2</td> <td>6/2016</td> <td>Langelaan</td> <td></td>	B2	6/2016	Langelaan	
	723,235	A	3/1903	Brachhausen	2001/0007235	A1	7/2001	Dynes et al.	
	773,155	A	10/1904	O'neill	2001/0042498	A1	11/2001	Burnham	
	2,110,812	A	3/1938	Negri	2002/0056408	A1	5/2002	Dec et al.	
	2,451,781	A	3/1948	Steele	2002/0072285	A1	6/2002	Jung	
	2,748,400	A	6/1956	Kregall	2002/0124783	A1 *	9/2002	Dynes	B63B 1/285 114/55.54
	2,812,736	A	11/1957	Fry	2003/0167991	A1	9/2003	Namanny	
	2,815,518	A	12/1957	Kuehn	2004/0139905	A1	7/2004	Chen	
	2,840,832	A	7/1958	Fried	2005/0109258	A1 *	5/2005	Smith	B63B 1/24 114/274
	2,891,259	A	6/1959	Perry	2006/0094310	A1	5/2006	Railey	
	2,931,332	A	4/1960	Hebrank	2007/0046028	A1	3/2007	Gizara	
	3,019,760	A	4/1960	Berliner	2007/0089657	A1	4/2007	Ruan et al.	
	3,105,249	A	10/1963	Palmore	2007/0245943	A1 *	10/2007	Rice	B60V 1/08 114/272
	3,150,632	A	9/1964	Evans	2007/0283865	A1	12/2007	Railey	
	3,164,119	A	1/1965	Emmanuel et al.	2008/0078316	A1	4/2008	Gizara	
	3,213,822	A	10/1965	Sawchuk	2008/0168937	A1	7/2008	Ruan et al.	
	3,227,123	A	1/1966	Voigt	2008/0173225	A1	7/2008	Proto	
	3,254,622	A	6/1966	Bramson	2009/0165690	A1	7/2009	Walworth et al.	
	3,262,413	A	7/1966	Douglas	2009/0221198	A1	9/2009	Townsend	
	3,265,027	A *	8/1966	Brown	2010/0167605	A1 *	7/2010	Schultz et al.	B63H 5/14 440/67
					2010/0233920	A1	9/2010	Railey	
	3,294,055	A	12/1966	Mcguire	2010/0323568	A1 *	12/2010	Chambers	B63B 35/793 441/79
	3,324,822	A	6/1967	Carter, III	2011/0003521	A1	1/2011	Roman	
	3,340,845	A	9/1967	Tyrack	2011/0056423	A1	3/2011	Railey	
	3,371,646	A	3/1968	Mela	2011/0201238	A1	8/2011	Rott et al.	
	3,380,421	A	4/1968	Lstiburek	2011/0212691	A1	9/2011	Rott et al.	
	3,405,677	A *	10/1968	Smith	2011/0256518	A1	10/2011	Rott	
					2012/0000409	A1	1/2012	Railey	
	3,456,613	A	7/1969	Smith	2012/0073486	A1	3/2012	Railey	
	3,536,025	A	10/1970	Tierney	2012/0225598	A1	9/2012	Railey et al.	
	3,548,778	A	12/1970	Von Smagala-Romanoff	2013/0059489	A1	3/2013	Vlock et al.	
	3,747,138	A	7/1973	Morgan	2013/0104787	A1	5/2013	Roman	
	3,882,815	A	5/1975	Bennett	2013/0239861	A1	9/2013	Gizara	
	3,964,417	A	6/1976	Williams	2014/0007802	A1	1/2014	Railey	
	RE28,955	E	9/1976	Stanberry, Sr. et al.	2014/0134900	A1	5/2014	Derrah	
	4,020,782	A	5/1977	Gleason	2014/0349531	A1	11/2014	Mcclan	
	4,274,357	A	6/1981	Dawson	2015/0011133	A1	1/2015	Vlock et al.	
	4,508,046	A	4/1985	Coulter et al.	2015/0064995	A1	3/2015	Woods et al.	
	4,971,586	A	11/1990	Walsh	2015/0083034	A1	3/2015	Howes	
	5,017,166	A	5/1991	Chang	2015/0104985	A1 *	4/2015	Langelaan	B63H 21/17 440/6
	5,062,378	A	11/1991	Bateman					
	5,471,942	A	12/1995	Miller et al.					
	5,809,926	A *	9/1998	Kelsey					
	5,947,788	A	9/1999	Derrah					
	6,019,059	A *	2/2000	Kelsey					
	6,142,840	A	11/2000	Efthymiou					
	6,178,905	B1 *	1/2001	Dynes et al.					
	6,183,333	B1	2/2001	Hall	FOREIGN PATENT DOCUMENTS				
	6,192,817	B1	2/2001	Dec					
	6,311,631	B1	11/2001	Beecher	DE	3070662D1	6/1985		
	6,409,560	B1 *	6/2002	Austin	DE	4100890	A1	7/1992	
					DE	102004049615	A1	4/2006	
					DE	202012012844	U1	2/2014	
	6,568,340	B2	5/2003	Dec et al.					

(56)

References Cited

FOREIGN PATENT DOCUMENTS

DE	102013218735	A1	3/2015
EP	2700571	A2	2/2014
FR	2728863	A1	7/1996
FR	2755090	A1	4/1998
FR	2766154	A1	1/1999
JP	2012025293	A	2/2012
KR	1020140024816	A	3/2014
WO	WO-2006014085	A1	2/2006
WO	WO-2007088351	A1	8/2007
WO	WO-2011050410	A1	5/2011
WO	WO-2011075808	A1	6/2011
WO	WO-2011100654	A2	8/2011
WO	WO-2011130724	A2	10/2011
WO	WO-2012003333	A1	1/2012
WO	WO-2013173182	A1	11/2013
WO	WO-2013191501	A1	12/2013

OTHER PUBLICATIONS

U.S. Appl. No. 14/509,289, Non Final Office Action mailed Aug. 17, 2015, 9 pgs.



U.S. Appl. No. 14/509,289, Notice of Allowance mailed Apr. 26, 2016, 9 pgs.




U.S. Appl. No. 14/509,289, Notice of Allowance mailed Dec. 4, 2015, 9 pgs.

U.S. Appl. No. 14/509,289, Preliminary Amendment filed Apr. 12, 2016, 6 pgs.

U.S. Appl. No. 14/509,289, Response filed Nov. 16, 2015 to Non Final Office Action mailed Aug. 17, 2015, 8 pgs.

* cited by examiner

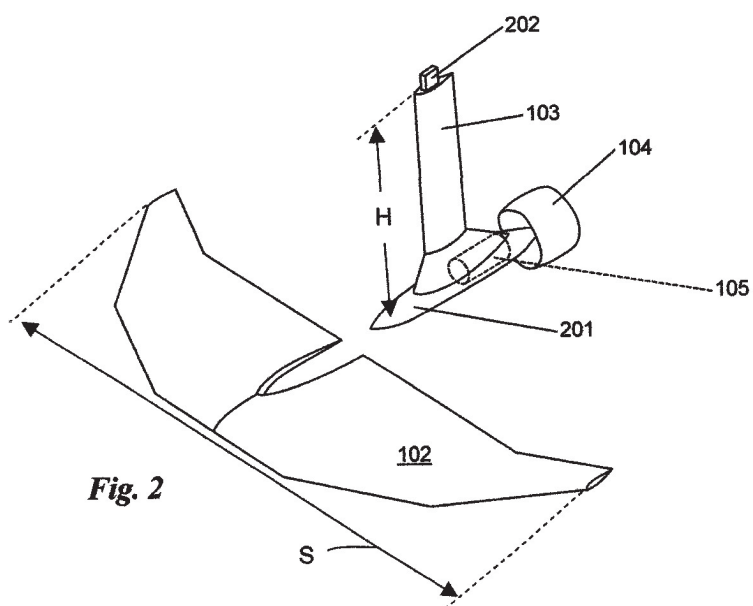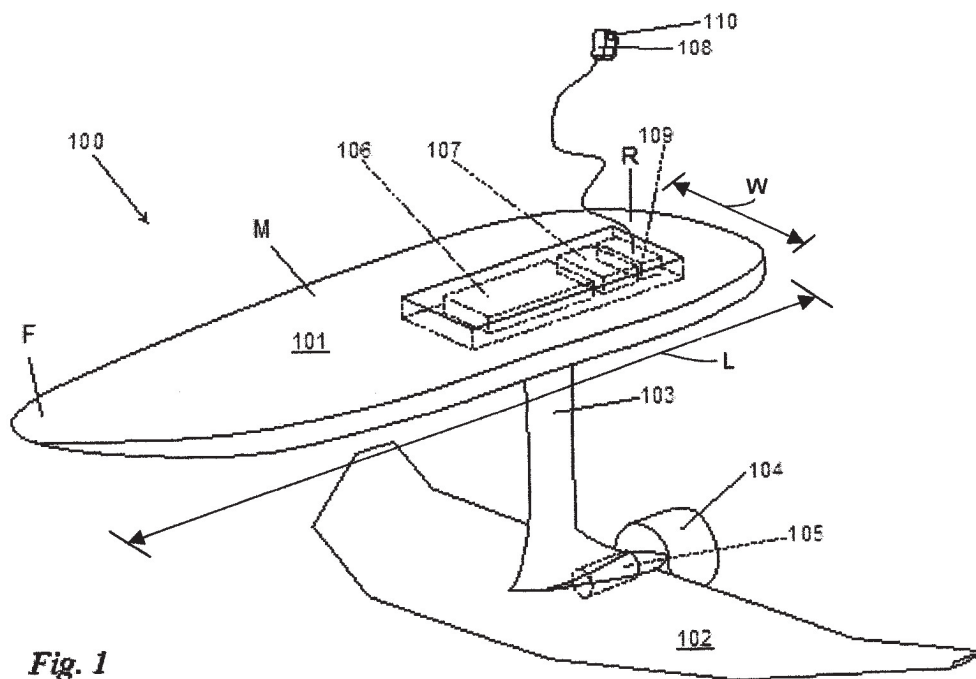

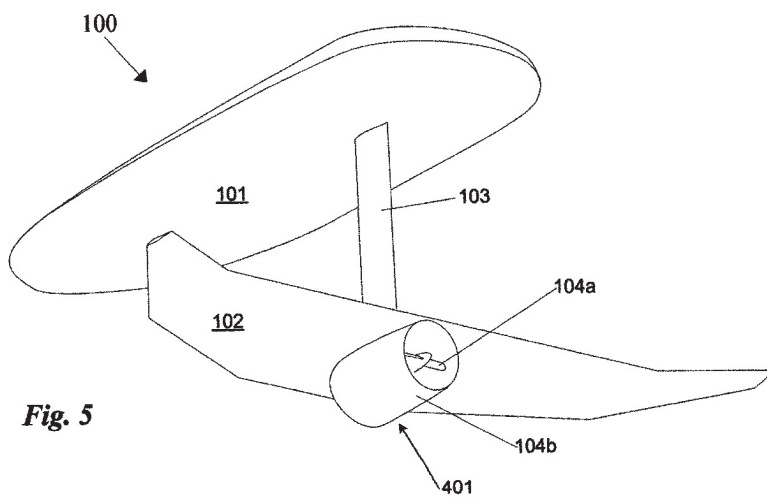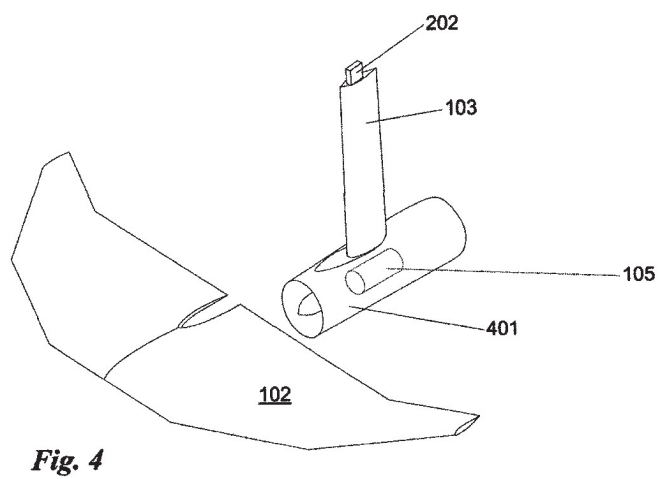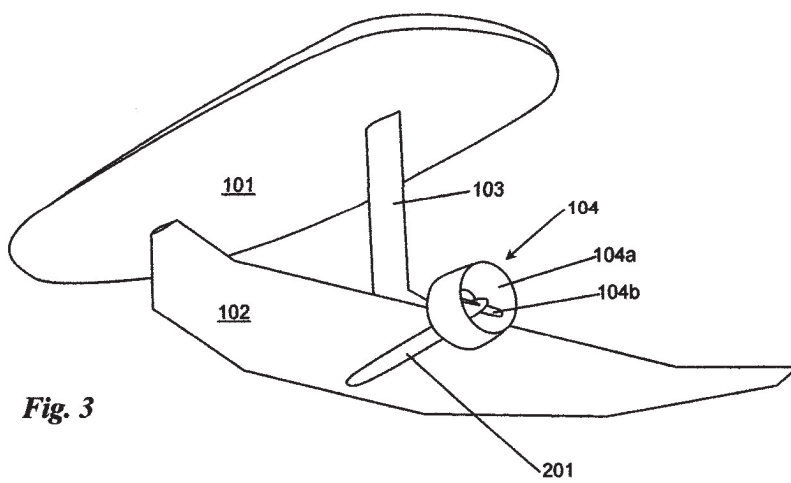

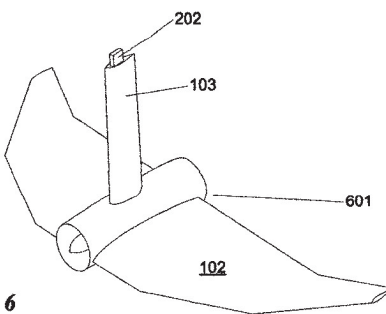


Fig. 6

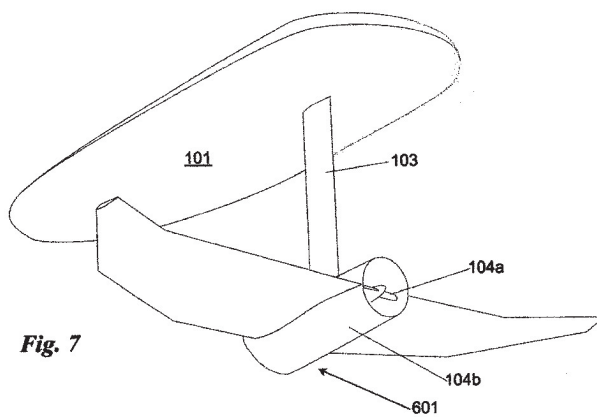


Fig. 7

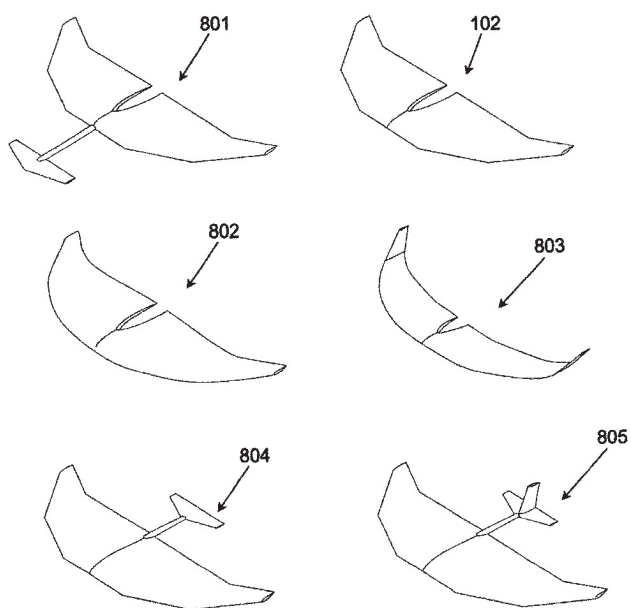
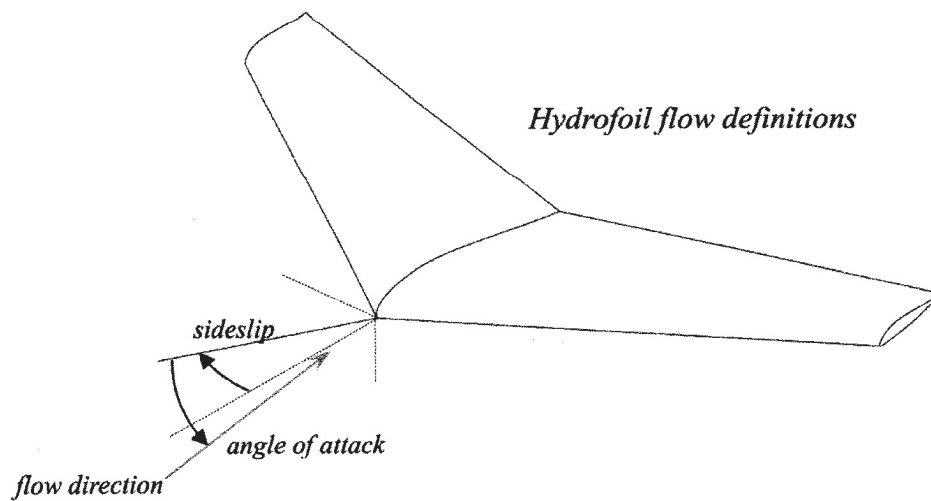
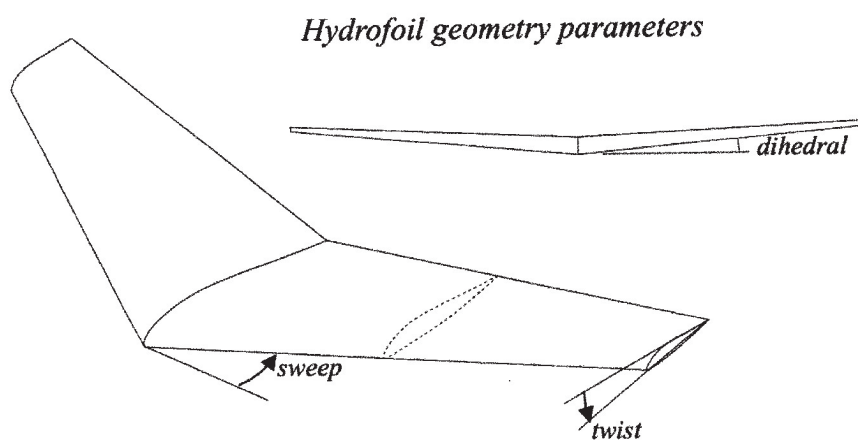


Fig. 8

**Fig. 9****Fig. 10**

1

POWERED HYDROFOIL BOARD**CROSS-REFERENCE TO RELATED APPLICATION**

This application is a continuation of U.S. Ser. No. 14/509,289, filed Oct. 8, 2014, which claims priority to U.S. Provisional Patent Application Ser. No. 61/889,071, filed Oct. 10, 2013, the contents of which are incorporated herein in their entireties.

FIELD OF THE INVENTION

The present invention relates to personal watercraft; specifically, an electrically powered hydrofoil surfboard that is controlled by weight shift.

BACKGROUND OF THE INVENTION

Hydrofoils have been used on surfboards (U.S. Pat. No. 5,062,378 A, Bateman; U.S. Pat. No. 3,747,138, Morgan; U.S. Pat. No. 7,144,285 B1, Tareah), sailboards (U.S. Pat. No. 4,508,046 Shannon), water skis (U.S. Pat. No. 7,232,355, Woolley), and devices for swimmers (U.S. Pat. No. 2,931,332, Hebrank) as well as ships and boats (e.g. U.S. Pat. No. 3,227,123 A Voigt). The purpose of hydrofoils on surfboards is typically to enable higher speeds and to lift the surfboard above the choppy, turbulent surface of the water, thus enabling surfing on larger waves. On sailboards and kiteboards, hydrofoils enable higher speeds; and on water skis hydrofoils enable new forms of trick skiing.

Powered surfboards have been developed for reducing the effort required in paddling (U.S. Pat. No. 7,731,555 B2 Bailey) and as personal watercraft (U.S. Pat. No. 6,702,634 B2 Jung, U.S. Pat. No. 3,262,413 A Bloomingdale et al., U.S. Pat. No. 6,192,817 B1 Dec, U.S. Pat. No. 4,971,586 A Walsh, U.S. Pat. No. 4,274,357 A Dawson). A particularly well-designed example of this type is the Jet-Surf (<http://www.jet-surf.es>). However, significant power is required to achieve speeds typical of surfing (up to ten horsepower to achieve thirty miles per hour), precluding the use of battery-powered motors for operationally useful periods.

A major factor that distinguishes surfboards from other watercraft is that control (both speed and directional) is affected via weight shift rather than by moveable surfaces (such as rudders) or thrust vectoring. Indeed, other methods of transport (skateboards and snowboards) also rely heavily on weight shift, and this method of control is central to the experience of surfing, snowboarding, and skateboarding.

An electrically powered hydrofoil device is described in Chen (U.S. Pat. No. 7,047,901 B2). The watercraft in that disclosure has two main disadvantages. First, the device in Chen requires a stabilizing component that controls the depth of the hydrofoil. Second, a steering mechanism is used for directional control. Therefore it does not (and cannot) accurately mimic the experience of surfing or snowboarding.

A need therefore exists for a personal watercraft that provides improved control and performance while providing a "surfing feel." In addition, this personal watercraft should be mechanically simple, easy to transport, and easy to maintain.

SUMMARY OF THE INVENTION

Embodiments of the present invention improve upon the powered surfboard by incorporating a hydrofoil. The hydrofoil greatly reduces the power required to travel at "fun"

2

speeds (ranging from twenty to thirty miles per hour, but can be higher or lower depending on the user), so that a battery-powered electric motor (rather than an internal combustion engine) can be used to power the propulsion system.

5 This results in reduced noise and vibration as well as reduced environmental impact.

Embodiments of the present invention also improve upon the powered hydrofoil surfboard. The hydrofoil of the present invention has been designed to provide passive stability in the longitudinal direction, making traditional altitude control systems based on moveable surfaces unnecessary. Further, both longitudinal and directional control of the board is via weight shift, so that riding the board is similar in feel to surfing or snowboarding, and the lack of a mechanical steering system makes the craft lighter, reduces parts count, and reduces the likelihood of a mechanical failure. Speed control is provided through a combination of throttle and weight shift.

The prior art in powered hydrofoil surfboards have all relied on moveable surfaces for control, and have ignored the possibility of designing the hydrofoil for passive static stability. The watercraft of the present invention is specifically designed to achieve desired levels of stability and controllability without the need for moveable surfaces. This is done through a combination of airfoil design, planform design, and tailoring the span-wise twist distribution to achieve desired outcomes.

Specific hydrofoils can be designed for different purposes: a larger foil results in lower speeds, more suitable for training; smaller foils operate at higher speeds for more advanced user; and tuning of the specific profile, twist, and dihedral can also be used to tailor the board to the user. A fixed canard or horizontal tail surface can also be added to further improve passive longitudinal stability as a training aid while still requiring the use of weight shift for control. A fixed vertical tail can be added to improve lateral stability as a training aid while still requiring the use of weight shift for control.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a personal hydrofoil watercraft in accordance with the present invention;

FIG. 2 is an exploded perspective view showing one embodiment of the hydrofoil and propulsion system assembly;

FIG. 3 is a perspective view from underneath a personal hydrofoil watercraft in accordance with the present invention;

FIG. 4 is an exploded perspective view showing an alternate embodiment of the hydrofoil and propulsion system assembly;

FIG. 5 is a perspective view from underneath a personal hydrofoil watercraft with the hydrofoil and propulsion system of FIG. 4;

FIG. 6 is a perspective view of an embodiment of the hydrofoil and propulsion system as an integrated body;

FIG. 7 is a perspective view from underneath a personal hydrofoil watercraft with the hydrofoil and propulsion system of FIG. 6;

FIG. 8 shows perspective views of alternate examples of hydrofoil planform designs;

FIG. 9 is a schematic illustrating hydrofoil flow definitions; and

3

FIG. 10 is a schematic showing hydrofoil geometry parameters

DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 1, a perspective view of a hydrofoil watercraft 100 in accordance with an embodiment of the present invention is shown. Watercraft 100 may include a flotation board 101, a hydrofoil 102 spaced below the flotation board, a strut 103 connecting the hydrofoil to the board, a propulsion system 104, an electric motor 105, a battery 106, a motor speed controller 107, a throttle system 108, a throttle interface 109, and a spring-loaded trigger 110.

The flotation board 101 of FIG. 1 is similar to those used in surfing or sailboarding. In the illustrated embodiment, the flotation board has a fore-aft length L that is greater than its lateral width W. Generally, the ratio of lateral width W to length L may be between 0.2 and 0.5. The length L will generally be in the range of 5 to 8 feet and the width W will generally be in the range of 1.5 to 2 feet. The primary function of the flotation board is to provide flotation at low speeds, and it is preferentially configured with a flat upper surface to allow an adult human to lie prone, sit, kneel or stand on it and an opposed bottom surface facing the water. The lower surface may be almost flat to permit good hydroplaning.

The flotation board 101 can be made of foam, fiber-reinforced epoxy (using glass, carbon, or Kevlar fibers), or other suitable materials known to those of skill in the art. It may have a watertight compartment defined therein to contain the battery 106, motor speed controller 107 and throttle interface 109. The flotation board 101 provides an attachment structure for attaching the strut 103. The attachment structure may be a releasable mechanism to permit easy assembly and dis-assembly for transport. The flotation board 101 may be said to have a forward section F at the front end, a rear section R at the rear end and a middle section M intermediate the front and rear ends. Element M may also represent a midpoint that is halfway between the front and rear ends. As shown, the strut 103 is connected to the flotation board between the middle section M and the rear section R. The connection is behind the midpoint M and centered side to side. A throttle cable may connect the throttle module 108 to the throttle interface 109 or wireless communication may be provided between the throttle module 108 and throttle interface 109. In an alternate arrangement, the batteries 106 may be contained in the strut 103 or embedded in the hydrofoil 102. Each configuration has advantages and disadvantages ranging from ease of access for charging (in the case of a compartment in the flotation board) to reduction in the length of wires needed to connect the battery to the motor (in the case of containment in the strut or hydrofoil).

The strut 103 can be made of extruded aluminum, fiber-reinforced epoxy (using glass, carbon, or Kevlar fibers), or other suitable materials known to those of skill in the art. As shown, the strut is streamlined in cross-section to minimize drag. The strut may be constructed so as to allow passage of electrical wires from the motor speed controller 107 to the electric motor 105, such as inside or attached to the strut. The primary function of the strut is to rigidly connect the hydrofoil 102 at a fixed distance H from the board 101. The distance H will generally be in the range of 1 to 4 feet. In an alternative embodiment, more than one strut may be used or the strut may be shaped differently than shown.

The hydrofoil 102 of FIG. 1 is specifically designed to be statically stable in the longitudinal degrees of freedom via a

4

combination of airfoil design, planform design and span-wise twist distribution. The hydrofoil 102 has a wingspan S (see FIG. 2). The wingspan will generally be in the range of 1 to 4 feet. It is also designed to be stable in sideslip ("weathercock stability") either via planform design or via the addition of small vertical foils (winglets or fins). In some cases it may be advantageous to add a fixed canard or horizontal tail to further enhance static longitudinal stability (for example, for training purposes). The fixed distance H (see FIG. 2) of the strut 103 may be greater than the wingspan S of the hydrofoil 102 so that the hydrofoil remains fully submerged even when the user is leaning to turn.

The propulsion system 104 (discussed in more detail below) may comprise a ducted propeller or pump-jet, or may be of another type. The propulsion system is driven by the electric motor 105.

The electric motor 105 is connected to the motor speed controller 107 using wires sized to carry the required voltage and current. The motor speed controller 107 may include other functionality such as a low-voltage alarm or other protective circuitry for the battery 106; alternately, such circuitry may be included in the throttle interface 109. The main function of the throttle interface is to connect the motor speed controller 107 to the throttle module 108.

The throttle module 108 may be a hand-held device with a spring-loaded trigger 110 (so the throttle disengages automatically when it is released). Pulling or depressing the trigger causes the motor to turn a propeller or impeller in the propulsion system 104, with motor speed being proportional to the degree the trigger is pulled or depressed. The throttle module communicates the degree of trigger pull/depression to the throttle interface 109 via a cable or wirelessly. The throttle module may take other forms, such as being operated by other body parts.

The throttle interface 109 may in addition include circuitry and connections to permit charging of the battery 106. This would include battery protection circuits. The throttle interface may also include a means to display battery information to the user (for example, via LEDs to indicate charge state). Alternately, such information may be displayed on the throttle module 108.

To operate the watercraft 100, a user initially lies prone on the flotation board 101. The throttle is engaged, causing the craft to accelerate. As the craft gains speed the user may move to a kneeling or standing position. As the craft further gains speed the hydrofoil generates sufficient lift to raise the board above the water. The user controls altitude of the board by leaning back (to go up) and forward (to go down). The user can steer left or right by leaning in the appropriate direction. Releasing the throttle causes the motor to stop, reducing speed. The watercraft 100 may have other safety devices and features which causes the electric motor 105 to stop when the rider falls off the flotation board 101. These devices may monitor the presence of a user on the flotation board 101.

FIG. 2 shows an exploded perspective view of one embodiment of the hydrofoil 102, strut 103, propulsion system 104, and electric motor 105. The electric motor 105 and propulsion system 104 are integrated into a waterproof, streamlined pod 201 that is designed to be embedded in the hydrofoil 102. The pod 201 also defines the lower end of the strut 103. The streamlined pod performs two main structural functions: it transmits propulsion forces to the strut 103 and it transmits lift forces from the hydrofoil 102 to the strut 103. It may also contain provisions for cooling the electric motor 105. The pod 201 is connected to the hydrofoil 102 either by

a fitting (so that the hydrofoil can be easily removed) or it is integrally manufactured with the hydrofoil 102.

In its preferential form the electric motor 105 is a high efficiency brushless motor. A gearbox may be provided to ensure that the propeller or impeller of the propulsion system 104 operates over an appropriate range of speeds.

The strut 103 contains at its upper end a fitting 202 to attach the strut to the flotation board 101 of FIG. 1. This fitting fits into a complementary slot in flotation board 101 and may use one of several methods to attach the strut 103 to the flotation board 101: examples include bolts, pins, or latches. Any other attachment approach may be used, or the strut and/or foil and/or flotation board may be integrally formed or permanently interconnected.

FIG. 3 shows a perspective view of the watercraft 100 from below. In its preferred form the propulsion system 104 comprises a propeller 104a and a duct 104b. The duct has two purposes: it acts as a propeller guard and it is designed to increase propeller thrust. In an alternate form the propulsion system may comprise a pump-jet.

FIG. 4 shows an exploded perspective view of an alternative embodiment of the hydrofoil 102, strut 103, electric motor 105 and propulsion system 401. In this embodiment the propulsion system comprises a long duct and may contain a stator assembly. The duct functions both as a guard for the propeller (shown in FIG. 3) and to improve hydrodynamic efficiency. A stator (not shown) aft of the propeller can also be included to improve propulsive efficiency. In this embodiment the electric motor 105 is enclosed in a streamlined pod embedded in the propulsion system. In the embodiment of FIG. 4, the propulsion system is mounted below the hydrofoil 102. FIG. 5 shows a perspective view of the watercraft 100 from below with the propulsion system 401 mounted below the hydrofoil 102.

FIG. 6 shows a perspective view of an alternative embodiment of the hydrofoil 102, strut 103, and propulsion system 601. In this embodiment the propulsion system is integrated in the hydrofoil so that the inlet is at or near the forward (leading) edge of the hydrofoil and the outlet is at or near the rear (trailing) edge of the hydrofoil. As in the embodiments of FIG. 2, FIG. 3, FIG. 4 and FIG. 5, the propulsion system comprises a duct, a propeller, electric motor, and may include a stator.

FIG. 7 shows a perspective view of the watercraft 100 from below with the propulsion system of FIG. 6 integrated in the hydrofoil.

FIG. 8 shows perspective views of alternative embodiments of the hydrofoil planform. Hydrofoil 801 includes a fixed canard that increases stability (suitable for training). Note that this canard is fixed, not movable: control still occurs through weight shift. Hydrofoil 102 is shown in earlier drawings, and can be considered a baseline “all around” hydrofoil (suitable for a wide range of abilities). Foils 802 and 803 are progressively higher performance, permitting higher speeds and/or greater maneuverability. Foil 803 includes winglets, which increase directional stability and decrease drag. Foil 804 includes a horizontal tail, which improves longitudinal stability (similar to 801, it is suitable for training). Foil 805 includes both a horizontal tail and a vertical tail, improving longitudinal stability and directional stability (suitable for training). These tails may be considered a secondary hydrofoil. Note that other versions of the hydrofoil are possible: the key is designing the hydrofoil for passive static stability via planform design, airfoil design, and span-wise twist distribution.

Preferred embodiments of the present invention provide a hydrofoil watercraft with a fixed hydrofoil connected to a

flotation board by one or more struts, with the fixed hydrofoil having no movable or adjustable surfaces. No movable hydrofoil is provided, but secondary hydrofoils on one or more struts (as shown in 801, 804, and 805) may be included. Additionally, no movable steering system is provided, as the watercraft is maneuvered by weight shifts.

This invention exploits passive stability to obviate the necessity for mechanisms or active control systems to provide stability. This passive stability allows the watercraft to be controlled by weight shift rather than by mechanical systems. FIG. 9 and FIG. 10 show the hydrofoil flow definitions and hydrofoil geometry parameters respectively. For the hydrofoil, longitudinally trimmed motion occurs when the total pitching moment is zero. This trim condition is stable if a disturbance results in a restoring moment that returns the hydrofoil to its original condition. The pitching moment coefficient can be written as $C_m = C_{m0} + C_{m\alpha}\alpha + C_{mQ}Q$ where C_{m0} is the pitching moment coefficient at zero angle of attack and zero pitch rate, $C_{m\alpha}$ is the derivative of pitching moment coefficient with respect to angle of attack (called pitch stiffness), α is the angle of attack (the angle between the flow direction and the chord of the hydrofoil), C_{mQ} is the derivative of pitching moment coefficient with respect to pitch rate (called pitch damping), and Q is the pitch rate. To ensure a trimmable, stable hydrofoil, the following conditions must be true: $C_{m0} > 0$, $C_{m\alpha} < 0$, $C_{mQ} < 0$. This is achieved with a combination of airfoil selection, hydrofoil sweep and span-wise twist. The exact ratios of wing sweep and twist are dependent on the degree of stability desired and are also affected by the pitching moment characteristics of the airfoil. The derivative C_{mQ} determines the “quickness” of the longitudinal response. Typically it will lie between -2 and -20 , with more negative values leading to a “sluggish” feel. In the steady state (when $Q=0$) the angle of attack (and thus speed) at which trim occurs is a function of C_{m0} and $C_{m\alpha}$.

$$\alpha_{trim} = -\frac{C_{m0}}{C_{m\alpha}}$$

C_{m0} is defined entirely by hydrofoil design parameters; $C_{m\alpha}$ is defined by a combination of hydrofoil design parameters and the location of the center of gravity: this is the means by which weight shift enables longitudinal control of the hydrofoil watercraft.

Similarly for lateral motion, trim occurs when the yawing moment and rolling moment are zero. It is further desirable that this occurs at zero sideslip angle, so the hydrofoil “tracks straight” through the water. When the yaw rate is zero, rolling moment coefficient and yawing moment coefficient can be written as

$$C_l = C_{l0} + C_{l\beta}\beta + C_{lP}P$$

$$C_n = C_{n0} + C_{n\beta}\beta + C_{nP}P$$

where C_{l0} and C_{n0} are the roll rate and yaw rate at zero sideslip, respectively, $C_{l\beta}$ and $C_{n\beta}$ are the derivatives of roll rate and yaw rate with respect to sideslip angle, respectively, C_{lP} and C_{nP} are the derivatives of roll rate and yaw rate with respect to roll rate, respectively. Note that $C_{n\beta}$ is sometimes called weathercock stiffness and C_{lP} is sometimes called roll damping. Trimmable, stable motion at zero sideslip is achieved by ensuring that the following conditions are true:

$$C_{l0} = 0$$

$$C_{n0} = 0$$

7

$$C_{i_p} < 0$$

$$C_{n_p} > 0$$

$$C_{l_p} < 0$$

This is achieved through a combination of sweep and dihedral and can also be influenced with the addition of winglets or a fin. The practical upper limit of C_{n_p} and practical lower limits of C_{l_p} and C_{i_p} are determined by the practicality of hydrofoil design. For example, sweep angles greater than 60 degrees are unlikely to lead to useable designs and twist of greater than 15 degrees is unlikely to lead to useable designs. Given these geometric limits and the subjective judgment of "ride quality" on the part of a user, bounds on the roll and yaw derivatives exist but are not quantifiable to a useful degree of precision.

Directional control is achieved by the weight shift and the weathercock stability stiffness. Shifting weight to one side causes the watercraft to roll to that side; this causes sideslip in the direction of the weight shift, and the C_{n_p} term causes the vehicle to turn in the direction of the lean. It should be noted that there is a trade-off between stability and maneuverability. More experienced users generally want a watercraft that is somewhat less stable to provide greater maneuverability. In contrast, less experienced users may want a watercraft that has more stability, and this may be done through appropriate design of the hydrofoil to give the desired stability and maneuverability characteristics.

As will be clear to those of skill in the art, the herein described embodiments of the present invention may be altered in various ways without departing from the scope or teaching of the present invention. It is the following claims, including all equivalents, which define the scope of the invention.

I claim:

1. A passively stable, weight-shift controlled personal hydrofoil watercraft, comprising:

a flotation device that has a fore-aft length greater than a lateral width, the flotation device having a top surface and a bottom surface, wherein a user can be disposed on the top surface of the flotation device in a prone, kneeling, or standing position, the flotation device having a forward section, a middle section, and a rear section;

a strut having an upper end and a lower end, the upper end fixedly interconnected with the flotation device between the middle section and the rear section of the flotation device;

a hydrofoil fixedly interconnected with the lower end of the strut, the hydrofoil having no movable surface;

a propulsion system for propelling the watercraft in a body of water, wherein the propulsion system is connected to the hydrofoil; and

the watercraft having no movable steering system.

2. A watercraft in accordance with claim 1, wherein the propulsion system comprises a battery, an electric motor, a motor speed controller, and a propulsor, the propulsor selected from a propeller, a ducted propeller, or a pump-jet.

3. A watercraft in accordance with claim 2, wherein the propulsor is disposed below the hydrofoil.

4. A watercraft in accordance with claim 1, wherein the hydrofoil is indirectly connected to the strut.

5. A watercraft in accordance with claim 4, wherein the strut is directly connected to the propulsion system.

6. A watercraft in accordance with claim 5, wherein a first hydrofoil wing of the hydrofoil is indirectly connected to the strut through the propulsion system.

8

7. A watercraft in accordance with claim 4, wherein the hydrofoil comprises a plurality of wings that are interconnected by way of a strut.

8. A watercraft in accordance with claim 2, wherein the battery and motor speed controller are contained in a watertight compartment integrated into the flotation device.

9. A watercraft in accordance with claim 2, wherein the electric motor is integrated into a waterproof, streamlined pod and the watercraft comprises a cooling system for cooling the electric motor.

10. A watercraft in accordance with claim 9, wherein the waterproof, streamlined pod is removably interconnected with the hydrofoil through a fitting.

11. A watercraft in accordance with claim 8, further comprising a wireless handheld controller having a transmitter, and a throttle interface having a receiver, wherein the transmitter is adapted to send wireless signals to the receiver that cause an output of the propulsion system to change.

12. A watercraft in accordance with claim 1, wherein a first hydrofoil wing of the hydrofoil is directly connected to the strut.

13. A watercraft in accordance with claim 8, wherein the strut has an internal passage and electrical wires extend from the electric motor to the watertight compartment inside the strut through the internal passage for controlling the electric motor.

14. A watercraft in accordance with claim 13, wherein the flotation device has a detector adapted to detect a user's presence on the flotation device and cease operation of the electric motor if the detector detects that the user is not on the flotation device.

15. A watercraft in accordance with claim 1, wherein the propulsion system is directly or indirectly connected to the hydrofoil.

16. A personal hydrofoil watercraft, comprising:

a surfboard-shaped flotation device that has a fore-aft length greater than a lateral width, the flotation device having a top surface and a bottom surface, wherein the top surface has a substantially horizontal supporting surface configured to support a user in a prone, kneeling, or standing position, the flotation device having a forward section, a middle section, and a rear section;

a hydrofoil interconnected with the surfboard-shaped flotation device, the hydrofoil having a strut and a first hydrofoil wing, an upper end of the strut being fixedly interconnected with the surfboard-shaped flotation device;

a propulsion system attached to the surfboard-shaped flotation device for propelling the watercraft in a body of water, the propulsion system comprising a battery, an electric motor, a motor speed controller, and a propulsor, wherein the propulsor is selected from a propeller, a ducted propeller, or a pump-jet, and the battery and motor speed controller are contained in a watertight compartment integrated into the flotation device;

the watercraft having no movable steering system;

a handheld controller having a throttle; and

a throttle interface, wherein the throttle is adapted to send electronic signals to the throttle interface that cause an output of the propulsion system to change.

17. A watercraft in accordance with claim 16, wherein the hydrofoil comprises a plurality of hydrofoil wings including the first hydrofoil wing and a second hydrofoil wing, the first and second hydrofoil wings being connected by way of a strut.

18. A watercraft in accordance with claim 16, wherein the watercraft comprises a cooling system for cooling the electric motor.

19. A watercraft in accordance with claim 16, wherein the strut has an internal passage and electrical wires extend from the electric motor to the watertight compartment inside the strut through the internal passage for controlling electric motor. 5

20. A watercraft in accordance with claim 16, wherein the handheld controller comprises a wireless transmitter operatively coupled to the throttle and the throttle interface includes a receiver, the transmitter being adapted to send wireless signals to the receiver in response to actuation of the throttle that cause an output of the propulsion system to change. 10 15

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 9,586,659 B2
APPLICATION NO. : 15/064521
DATED : March 7, 2017
INVENTOR(S) : Jacob Willem Langelan

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Claims

In Column 9, Line 4, in Claim 19, after “controlling”, insert --the--

Signed and Sealed this
First Day of May, 2018

A handwritten signature in black ink, appearing to read "Andrei Iancu", with a stylized, flowing script.

Andrei Iancu
Director of the United States Patent and Trademark Office



(10) **Number:** US 9,586,659 C1

(45) **Certificate Issued:** Aug. 6, 2024

- (52) *B63H 5/14* (2006.01)
B63H 21/17 (2006.01)
B63H 21/21 (2006.01)
U.S. Cl.
 CPC *B63H 11/04* (2013.01); *B63H 1/16*
 (2013.01); *B63H 5/14* (2013.01); *B63H 21/17*
 (2013.01); *B63H 21/21* (2013.01)
- (58) **Field of Classification Search**
 None
 See application file for complete search history.

No. 90/015,269, Aug. 9, 2023

Patent No.: **9,586,659**
 Issued: **Mar. 7, 2017**
 Appl. No.: **15/064,521**
 Filed: **Mar. 8, 2016**

Certificate of Correction issued May 1, 2018

(63) Continuation of application No. 14/509,289, filed on Oct. 8, 2014, now Pat. No. 9,359,044.

(60) Provisional application No. 61/889,071, filed on Oct. 10, 2013.

(51) **Int. Cl.**
B63H 11/04 (2006.01)
B63H 1/16 (2006.01)


References Cited

To view the complete listing of prior art documents cited during the proceeding for Reexamination Control Number 90/015,269, please refer to the USPTO's Patent Electronic System.

Primary Examiner — Sarah B McPartlin

ABSTRACT

A passively stable personal hydrofoil watercraft that has a flotation device, wherein a user can ride in a prone, kneeling, or standing position. The watercraft includes a strut having an upper end interconnected with the flotation device and lower end connected with a hydrofoil. The hydrofoil greatly reduces the power required to travel at higher speed. The watercraft also includes a propulsion system connected to the hydrofoil. Both longitudinal and directional control of the watercraft is via weight shift, eliminating the need of any movable surfaces. The flotation device, strut, and hydrofoil may be permanently interconnected or may be detachable.

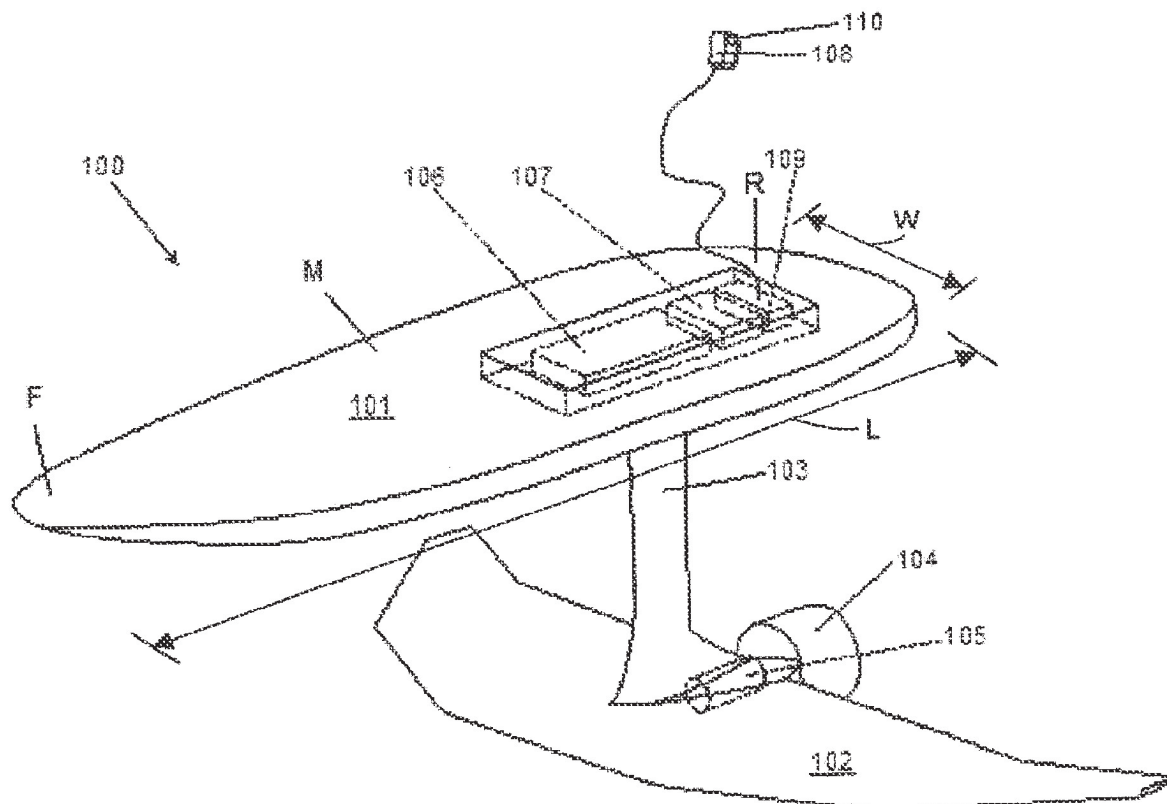

1

EX PARTE REEXAMINATION CERTIFICATE

THE PATENT IS HEREBY AMENDED AS
INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN
DETERMINED THAT:

The patentability of claims **1-15** is confirmed.

Claim **16** is determined to be patentable as amended.

Claims **17-20**, dependent on an amended claim, are determined to be patentable.

New claims **21-28** are added and determined to be patentable.

16. A *passively stable, weight-shift controlled* personal hydrofoil watercraft, comprising:

- a surfboard-shaped flotation device that has a fore-aft length greater than a lateral width, the flotation device having a top surface and a bottom surface, wherein the top surface has a substantially horizontal supporting surface configured to support a user in a prone, kneeling, or standing position, the flotation device having a forward section, a middle section, and a rear section;
- a hydrofoil interconnected with the surfboard-shaped flotation device, the hydrofoil having a strut and a first hydrofoil wing, an upper end of the strut being fixedly interconnected with the surfboard-shaped flotation device, *the hydrofoil having no movable surface*;
- a propulsion system attached to the surfboard-shaped flotation device for propelling the watercraft in a body of water, the propulsion system comprising a battery, an electric motor, a motor speed controller, and a propul-

2

sor, wherein the propulsor is selected from a propeller, a ducted propeller, or a pump-jet, and the battery and motor speed controller are contained in a watertight compartment integrated into the flotation device;

- the watercraft having no movable steering system;
- a handheld controller having a throttle; and
- a throttle interface, wherein the throttle is adapted to send electronic signals to the throttle interface that cause an output of the propulsion system to change.

19. A watercraft in accordance with claim **16**, wherein the strut has an internal passage and electrical wires extend from the electric motor to the watertight compartment inside the strut through the internal passage for controlling *the electric motor*.

21. A watercraft in accordance with claim **1**, wherein the upper end of the strut is fixedly interconnected with the flotation device via a detachable fitting.

22. A watercraft in accordance with claim **21**, wherein the detachable fitting is configured to fit into a complementary opening in the flotation device.

23. A watercraft in accordance with claim **22**, wherein the fitting is configured to be secured within the complementary opening by at least one of a bolt, a pin, and a latch.

24. A watercraft in accordance with claim **1**, wherein the propulsion system includes a battery positioned in the strut.

25. A watercraft in accordance with claim **24**, further comprising a wired connection between the battery and a motor of the propulsion system.

26. A watercraft in accordance with claim **1**, further comprising a safety device for monitoring the presence of a user on the flotation board.

27. A watercraft in accordance with claim **1**, wherein the strut is the only strut connected with the flotation device.

28. A watercraft in accordance with claim **1**, wherein the propulsion system includes a motor speed controller contained in a watertight compartment integrated into the flotation device.

* * * * *