



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.11.2006 Bulletin 2006/47

(51) Int Cl.:
B25H 3/02 (2006.01)

(21) Application number: **06010116.9**

(22) Date of filing: **16.05.2006**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**
Designated Extension States:
AL BA HR MK YU

(72) Inventor: **Duvigneau, Nikolai
Caesarea 38900 (IL)**

(74) Representative: **Vossius & Partner
Siebertstrasse 4
81675 München (DE)**

(30) Priority: **16.05.2005 US 681159 P**

(71) Applicant: **KETER PLASTIC LTD.
Herzelyia 46852 (IL)**

Remarks:

A request for correction of the description has been filed pursuant to Rule 88 EPC. A decision on the request will be taken during the proceedings before the Examining Division (Guidelines for Examination in the EPO, A-V, 3.).

(54) **Portable container assembly**

(57) A wheeled cabinet assembly comprising a wheeled base cabinet (12) fitted with a locomoting handle

(46), and at least one detachable container (80) made from a pliable material and designed as an independent carrying bag.

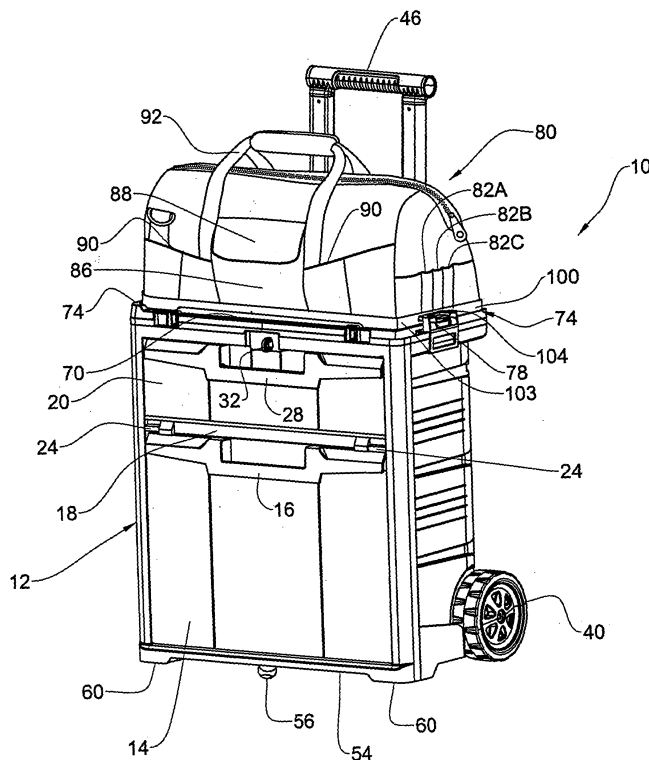


FIG. 1

Description

[0001] This invention relates generally to containers adapted to store any items a person may require such as hobby gear (fishing equipment, remote controlled items, etc), tools, nuts and bolts, and whatever other articles a worker requires to perform various tasks at a workplace, and more particularly to a portable container assembly which can be wheeled to a workplace.

[0002] Whilst hereinafter in the specification and claims the assembly is referred to as a tool assembly, it should be understood in its broad meaning, namely suited for any type of equipment and gear.

[0003] When a mechanic works in a garage to repair automobiles, the tools, the gauges, the bolts and all other articles he may require for this purpose are then available to the mechanic in a workshop.

[0004] But when a worker is required to go to a work place which is not a workshop in that it lacks the tools and other articles needed by the worker to perform various tasks, then the worker must bring along to the work place whatever tools and articles he needs to do the job he is expected to carry out, thereby converting the unequipped work place into a workshop.

[0005] In those cases where the tools and other articles the worker requires for the job at the work place can be stored in a tool box, then the worker can hand carry the tool box to the work place and then, in effect, transform it to a workshop. But more often than not, what the worker needs to bring to the work place cannot be fully accommodated even in an exceptionally large-capacity tool box.

[0006] To make it possible to wheel to a workplace a container capable of storing not only tools but whatever other articles are necessary to carry out the job to be performed at the work place, it is known to provide for this purpose a portable, wheeled container. Examples of rolling container assemblies are disclosed, for example, in US Patent 6,374,847 to Tirami *et al*, directed to a rolling containers assembly including (a) a base cabinet including wheels and (b) at least one additional cabinet being removably connectable on top of the base cabinet, the additional cabinet having a pulling handle for locomotins the rolling containers assembly.

[0007] US Patent 6,374,847 also to Tirami *et al* is directed to a rolling containers assembly including (a) a base cabinet including wheels and a pulling handle for locomoting the rolling containers assembly; and (b) at least one additional cabinet being removably connectable on top of the base cabinet.

[0008] US Patent 6,371,320 assigned to the same Applicant as the present invention is concerned with a portable workshop container assembly adapted to store tools and other articles a worker requires to perform various tasks at a workplace. The assembly includes three major components in stacked relation. The lower component is a wheeled bucket, the middle component is a tray nested in the bucket and provided with a rim, and the third component is a tool box that rests on the rim. Also pro-

vided is a latching mechanism having a latch which is pivoted by a toggle member to the upper end of the bucket and cooperates with a first catch element mounted at the bottom of the tool box and a second catch element mounted on the rim of the tray. When the tool box rests on the rim, the first and second catch elements are then adjacent each other. In one mode of operation, the latch simultaneously engages the first and second latch elements to interlock all three components to form a unitary assembly that can be wheeled to the work place.

[0009] Still an arrangement is disclosed in US Patent 5,240,264 is concerned with a wheeled container having multiple closed compartments which can be removed and handled individually. The container can be easily assembled and disassembled for storage and transport, and where the wheels which fold away when not in use.

[0010] At times there may be a need to carry items to a location to where the wheeled container can not be locomoted, e.g. owing to sandy or rough terrain. For example, when going fishing, the fisherman may locomot the wheeled assembly as near as the shore but will not take it in the water with him. Another example may be a repairman required to carry some tools and equipment to install a chandelier. He may wheel the wheeled assembly as near as below the working site but will then have to climb up and down a ladder each time he wishes to reach for a tool or piece of equipment.

[0011] It is an object of the present invention to provide a wheeled container assembly, wherein at least one container is a detachably articulated for carrying away items in an easy to carry container made of pliable material.

[0012] This object is attained with the subject-matter according to the claims.

[0013] According to the present invention there is provided a cabinet assembly comprising a wheeled base cabinet fitted with a locomoting handle, and at least one detachable container made from a pliable material and designed as a carrying bag.

[0014] The term *carrying bag* as used herein denotes a bag substantially made of pliable material e.g. fabric, Gore-Tex™, plastic, etc. and fitted with carrying means e.g. one or more of handles, shoulder straps and back straps, or a combination thereof.

[0015] The carrying bag (detachable container), according to one embodiment, is fitted with a base portion made of a substantially rigid material and fitted for articulation to the wheeled based cabinet. Said base portion comprises catch arrangements for engagement with a latch of the base cabinet. The base portion may be in the form of a frame supporting a sheet material serving as a base, or it may be a solid member with a solid base.

[0016] According to one embodiment of the invention, the carrying bag is detachably mounted over a top surface of base cabinet such that there extends a gap between said top surface and between the base portion of the carrying bag, said gap serving as a storage compartment for carrying straps of the bag, while not in use.

[0017] The base cabinet may be designed in different

modifications. For example, it may comprise one or more bins tiltable between an inclined, open position and an upright (erect) closed position. There may also be provided one or more drawer units slidably received within the base cabinet. One or more may be incorporated in the base cabinet for storage of small items, said trays being designed for removal from the base cabinet.

[0018] According to one particular design, the base cabinet is in the form of a basket or bucket with an open top closable by a tray, and where the carrying bag is fitted for detachably connecting to the tray or directly to the upper edge of the bucket.

[0019] The base cabinet may be part of a modular system where modular elements adapted for interconnecting are provided such that a user may assemble an array of compartments and cabinets to create a base cabinet, however with the carrying bag constituting one of said modular elements, typically adapted for articulating as an uppermost component.

[0020] According to an embodiment of the present invention, a top member of the base cabinet is formed with a top wall surface for supporting the carrying bag and optionally there is a peripheral shoulder around at least a portion of said top wall surface, snugly receiving respective portions of a base portion of the carrying bag.

[0021] The base portion of the carrying bag, according to one embodiment, is sufficiently deep to accommodate the pliable portion of the carrying bag, while not in use. According to a modification of this embodiment, the carrying bag may be articulated over a top surface of the base cabinet in an bottom up position, i.e. such that the pliable bag is collapsed and fully received within a basin of the base portion, and the base portion is attached in this fashion to the base cabinet.

[0022] The handle of the assembly is fitted to the base cabinet and is typically a collapsible or telescopic handle deformable between a collapsed or retracted position and an operative extended or extracted position.

[0023] For easy displacement of the cabinet assembly into its tilted rolling position, there is formed, adjacent a bottom end of the base cabinet, a footstep portion for an individual to step on when tilting the assembly.

[0024] Attachment of the carrying bag to the base cabinet may be facilitated by a variety of arrangements of an attaching mechanism, e.g. sliding catch, pivotable latch, snapping closure, etc. It is appreciated that instead of the carrying bag there may be attached over the base cabinet a tool case made of rigid material, where articulation thereto may be facilitated by the same attaching mechanism.

[0025] The base cabinet typically comprises a pair of rear wheels for pulling the assembly by the handle (e.g. at a tilted position of the assembly). Optionally, there is provided one or more front swiveled wheels for both supporting the cabinet assembly at an essentially upright/erect position, and for pushing it so as to roll it at the erect position.

[0026] In order to understand the invention and to see

how it may be carried out in practice, some embodiments will now be described, by way of non-limiting examples only, with reference to the accompanying drawings, in which:

Fig. 1A is an isometric view of a wheeled cabinet assembly in accordance with a first embodiment of the present invention;

Fig. 2A is an isometric view of the carrying bag of the cabinet assembly seen in Fig. 1, detached therefrom;

Fig. 2B is a rear isometric view of the base cabinet of the cabinet assembly seen in Fig. 1, with the carrying bag removed therefrom;

Fig. 3 is an exploded isometric view of a portion of the wheeled cabinet assembly of Fig. 1, illustrating the latching mechanism, wherein the base portion of the carrying bag is illustrated in solid and the body portion thereof is illustrated in dashed lines;

Fig. 4A is a rear isometric view of a cabinet assembly in accordance with a second embodiment of the present invention, the carrying bag shown partially in dashed lines;

Fig. 4B is a front isometric view of the cabinet assembly seen in Fig. 4A, with the carrying bag disengaged from the base cabinet;

Fig. 5 is a front exploded isometric view of the base cabinet of the cabinet assembly seen in Figs. 4A and 4B; and

Fig. 6 is an isometric view of a latching portion of the cabinet assembly illustrated in Figs. 4A and 4B.

[0027] Attention is first directed to Fig. 1 of the drawings illustrating a cabinet assembly in accordance with the first embodiment of the present invention generally designated **10**, comprising a rigid base cabinet **12** fitted with a tilting bin **14** accessible by pulling at handle **16** in a pivoting manner. Above the bin **14** there is a fixed shelf **18** giving rise to a storage compartment closable by a door **20** pivotally secured at **24** to the base cabinet. Door **20** is fitted with a handle **28** and an opening through which projects a locking eye **32**, for a lock to be mounted, to thereby lock the compartment **18** and prevent unauthorized opening thereof.

[0028] As can further be seen in Figs. 1 and 2B, the base cabinet **12** comprises a pair of wheels **40** (only one seen in Fig. 1) fitted at a rear lower end of the base cabinet so as to facilitate locomoting the cabinet assembly by pulling at handle **46**. As can be seen also in Fig. 2B, the handle **46** is in the form of a telescopic handle with two retractable bars **47** displaceable between a retracted position (not shown) and an operative position in which the handle is extracted as in the figures, to facilitate displacement of the cabinet assembly **10** by pulling. For that purpose, the cabinet assembly is typically tilted over the rear wheels **40** and there is formed, at lower portion of the rear face of the cabinet base a footstep portion **48** to assist in tilting of the cabinet.

[0029] In the embodiment of Fig. 1 the a base **54** of the base cabinet **12** is fitted with a front swiveled wheel **56** both for supporting the cabinet assembly **10** at its essentially erect position and also to facilitate pushing it as to roll it at this erect position (typically over a short distance i.e. repositioning). The swiveled wheel **56** may be integrated with the base **54** of the base cabinet or it may be detachably articulated thereto. Alternatively, or in addition, the bottom wall of the base cabinet is formed with rests **60** for supporting the cabinet assembly **10** while at the erect position, in rest.

[0030] Also noticeable in Fig. 2B, the base cabinet **12** is fitted at its rear wall **66** with a locking eye **68** engageable with a rear wall of the tiltable cabinet **14** to thereby lock the cabinet **14** and prevent unauthorized opening thereof.

[0031] Still noticed in Fig. 2B, a top wall **70** of the base cabinet **12** is fitted with a handle **74** to thereby facilitate lifting the base cabinet and carrying it over obstacles, inserting it into a car, etc. handle **74** substantially does not project from the surface of the top wall **70**.

[0032] It is further noticed that the top wall **70** is formed with a seating in the form of a partial peripheral shouldering rim **74** and with two pivot latches **78**, one at each side of the base cabinet **12**, the purpose of which will become apparent hereinafter.

[0033] As seen in Fig. 1, and in detail in Fig. 2A, a carrying bag **80** is mounted on the top wall **70** of the base cabinet **12**, said carrying bag **80** being made of a resilient material such as reinforced cloth, Gortex®, nylon, etc. The carrying bag **80** is typically formed with a plurality of pockets **82A**, **82B**, **82C**, etc., each sized to accommodate different pieces of equipment and gear at user's choice. The bag **80** further comprises an external pocket **86** closed by a flap cover **88** and several pockets **90** adapted to receive a carrying handle **92** or a shoulder strap **96** (Fig. 2A), respectively, when not in used.

[0034] The arrangement is such that the carrying bag **80** is made of a pliable material and is formed with a rigid base portion **100**, said base portion retaining a fixed shape and comprises depressions **104** at opposed sides thereof fitted for engagement by latches **78** of the base cabinet **12**.

[0035] Base portion **100** of carrying bag **80** is sized and shaped for receiving over the top wall **70** of base cabinet **12** such that the side walls **103** are at least partially supported by peripheral shouldering rim **74** of the base cabinet.

[0036] As can be seen in Fig. 3, the base portion **100** of the carrying bag **80** is in the form of a solid basin-like structure into which the fabric structure of the carrying bag is fixedly fitted (see Fig. 2A). In accordance with the embodiment of Fig. 3, the base member **100** is designed that such when it is assembled over the base cabinet **12**, there is a gap formed between a bottom surface of the bottom portion **100** and the top wall surface **70** of the base cabinet **12**. This gap can be used for example to store shoulder strap **96** of the carrying bag, a pair of back straps (not shown), etc.

[0037] In accordance with a modification of the invention, a bottom surface of the bottom portion **100** may be padded with a soft material to facilitate carrying of the soft bag **80** as a back pack.

[0038] Whilst it appears from Fig. 3 that the base portion **100** of the carrying bag is a solid basin-like member, it should be realized that the base member may also be in the form of a rigid frame with pliable material attached thereto for constituting the base of the carrying bag.

[0039] The basin-like base portion **100** of the carrying bag **80** is illustrated in the embodiment of Fig. 3 such that it is sufficiently deep to receive the pliable portions of the carrying bag **80** collapsed into the basin **105** such that it does not extend over the edges **107**, in a storage position.

[0040] In accordance with a modification (not shown) the carrying bag is designed such that its base portion may be articulated to the base cabinet **12** in an inverted position (i.e. 'bottoms up') such that the pliable portions of the carrying bag **80** are fully received within the basin **105** and the gap extending over the top wall **70** of the base cabinet **12**.

[0041] Also seen in more detail in Fig. 3 is the pivoting latch **78** which in this figure is illustrated in its open position with its claw **112** adapted for arresting wall portion **114** of base portion **100**.

[0042] Turning now to Figs. 4 to 6 of the drawings there is illustrated a different embodiment of the present invention generally designated **150**. In this embodiment, the rigid base cabinet **152** comprises a bucket **156** having an open top defined by a peripheral top edge **158** and fitted at two opposed side walls thereof with carrying handles **162**. A pair of rolling wheels **166** are pivotally secured at a bottom rear edge of the cabinet assembly **152**.

[0043] The cabinet assembly **152** further comprises a tray member **170** formed with a peripheral rim **174** adapted for resting over top edge **158** of bucket **156** and further fitted with a carrying handle **176** to assist in removal thereof. Tray **170** is compartmented for storage of small articles such as screwdrivers, bolts, drilling bits, etc.

[0044] Mounted over the tray **170** there is a cover **180** fitted for assembly over the peripheral shoulder **174** of tray **170**. Cover **180** has a top wall **182** depressed below its upper surface **186** and comprising a central handle **188** to facilitate transporting the base cabinet, at its closed position, e.g. over obstacles, etc., by lifting thereof.

[0045] As can further be seen, best in Figs. 4d and 6, the top cover **180** is formed at its top wall with a V-like longitudinal groove **192** serving to support a longitudinal work piece, e.g. while cutting, drilling, etc.

[0046] The cabinet assembly **152** further comprises a locomoting handle **198** which, similar to the previous embodiment, is a telescopic retractable handle, shown in Figs. 4A to 6 in its fully extracted operative position. However, in its retracted position, the handlebar **200** does not project over the top edge **192** of cover **180**.

[0047] Further noticeable is a latching mechanism generally designated **210** (see also Fig. 6) comprising a

latch **212** pivotally articulated to the bucket **156** adapted to simultaneously engage with a latch arresting portion **216** (Fig. 5) of the cover **180** and a recess portion **218** of the tray **170**, so as to interlock the bucket **156**, the tray **170** and the cover **180** to thereby form a unitary base cabinet **152**. The latch **212** comprises an opening through which extends a locking eye **220** for retaining the base cabinet **152** in a closed position to prevent unauthorized opening thereof.

[0048] As mentioned above, the top wall **182** of cover **180** is depressed and extends below a top surface **186** thereof thus forming a seating surface to accommodate a detachable container (carrying bag **230**), shown in the exploded view of Fig. 4B and illustrated in Fig. 4A such that its base portion **234** is illustrated in solid lines and the pliable body **236** is illustrated in this figure by dashed lines.

[0049] Similar to the previous embodiments, the carrying bag **230** has a rigid base portion **234** fitted for snugly receiving over the surface **182** of top cover **180**, said bottom portion **234** comprises at its side edges two depressions **240** fitted for arresting by a sliding latch **246** fitted on cover **180** for detachably articulating the carrying bag **230** over the base cabinet **152**. Disengagement of the carrying bag **230** from the base cabinet **152** is facilitated by slidingly displacing the latch **246** away from the base member **234**, so as to disengage from the recesses **240**.

[0050] Whilst some embodiments have been described and illustrated with reference to some drawings, the artisan will appreciate that many variations are possible which do not depart from the general scope of the invention, *mutatis, mutandis*. Such a variation may be the combination of any features taken from different embodiments described before.

[0051] For example, the base cabinet may be designed in different modules and comprise any combination of drawers, bins, shelves and removable compartments (rigid or pliable). Furthermore, articulation of the pliable compartment, namely the carrying bag, may be facilitated by other arrangements than those disclosed.

Claims

1. A cabinet assembly comprising a wheeled base cabinet fitted with a locomoting handle, and at least one detachable container made from a pliable material and designed as an independent carrying bag.
2. A cabinet assembly according to claim 1, wherein the carrying bag is substantially made of pliable material and is fitted with carrying arrangements being one or more of handles, shoulder straps and back straps.
3. A cabinet assembly according to claim 2, wherein a base portion of the carrying bag is padded on an

exterior thereof for use as a back pack.

4. A cabinet assembly according to any one of the preceding claims, wherein a base portion of the carrying bag is made of a substantially rigid material and is fitted for detachably articulation to the wheeled based cabinet.
5. A cabinet assembly according to claim 4, wherein the base portion of the carrying bag is a solid member or in the form of a frame supporting a sheet material serving as a base.
6. A cabinet assembly according to any one of the preceding claims, wherein the carrying bag is detachably mounted over a top surface of base cabinet such that there extends a gap between said top surface and between the base portion of the carrying bag, said gap serving as a storage compartment for carrying straps of the bag, while not in use.
7. A cabinet assembly according to any one of the preceding claims, wherein the base cabinet is in the form of a bucket with an open top edge closable by a tray, and where the carrying bag is fitted for detachably interconnecting to the tray and bucket or directly to the top edge of the bucket.
8. A cabinet assembly according to any one of the preceding claims, wherein an uppermost member of the base cabinet is formed with a top wall surface for supporting the carrying bag.
9. A cabinet assembly according to claim 8, wherein the top wall of the uppermost member is formed with a shouldering rim for at least partially supporting and snuggling respective portions of a base portion of the carrying bag.
10. A cabinet assembly according to any one of claims 3 to 9, wherein the base portion of the carrying bag is sufficiently deep to accommodate the pliable portion of the carrying bag, while not in use.
11. A cabinet assembly according to claim 10, wherein the carrying bag may be articulated over a top surface of the base cabinet in a bottoms up position, such that the pliable bag is collapsed and fully received within a basin of the base portion, and the base portion is attached in this fashion to the base cabinet.
12. A cabinet assembly according to any one of the preceding claims, wherein the locomoting handle of the assembly is fitted to the base cabinet and is typically a collapsible or telescopic handle deformable between a collapsed or retracted position and an operative extended or extracted position.

13. A cabinet assembly according to any one of the preceding claims, wherein adjacent a bottom end at a rear wall of the base cabinet there is a footstep portion for tilted the assembly into its rolling position. 5
14. A cabinet assembly according to any one of the preceding claims, wherein the carrying bag is articulated to the base cabinet by one of a sliding catch, a pivotable latch and a snapping closure. 10
15. A cabinet assembly according to any one of the preceding claims, wherein the carrying bag is replaceable by a suited rigid compartment formed with a base mimicking that of the base portion of the carrying bag. 15
16. A cabinet assembly according to any one of the preceding claims, wherein the base cabinet is fitted with a pair of rear wheels for pulling the assembly by a handle and further there is provided one or more front swiveled wheels for both supporting the cabinet assembly at an essentially erect position, and for pushing it so as to roll it at the erect position. 20
17. A cabinet assembly according to any one of the preceding claims, wherein the base cabinet comprises one or more bins tiltable between an inclined, open position and an upright closed position. 25
18. A cabinet assembly according to any one of the preceding claims, wherein the base cabinet comprises one or more drawer or trays slidingly received within the base cabinet. 30
19. A cabinet assembly according to any one of the preceding claims, wherein the base cabinet may is part of a modular system comprising modular compartment elements adapted for interconnecting such that a user may assemble an array of compartments and cabinets to create a base cabinet, however with the carrying bag constituting one of said modular elements, adapted for articulating as an uppermost component. 35 40

45

50

55

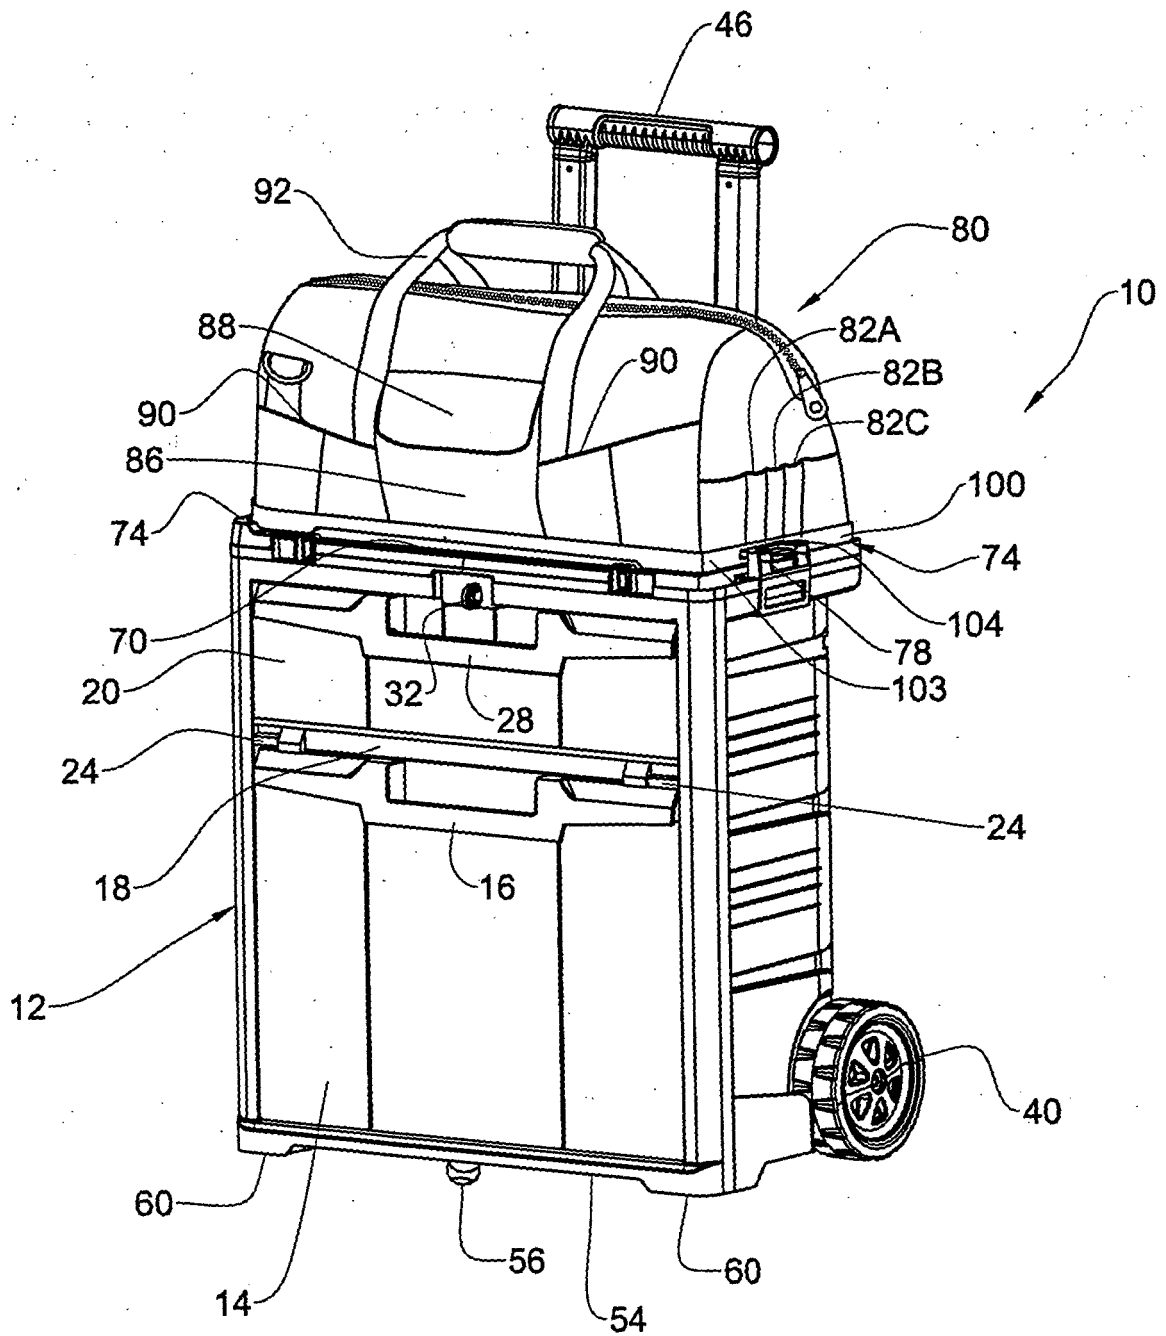


FIG. 1

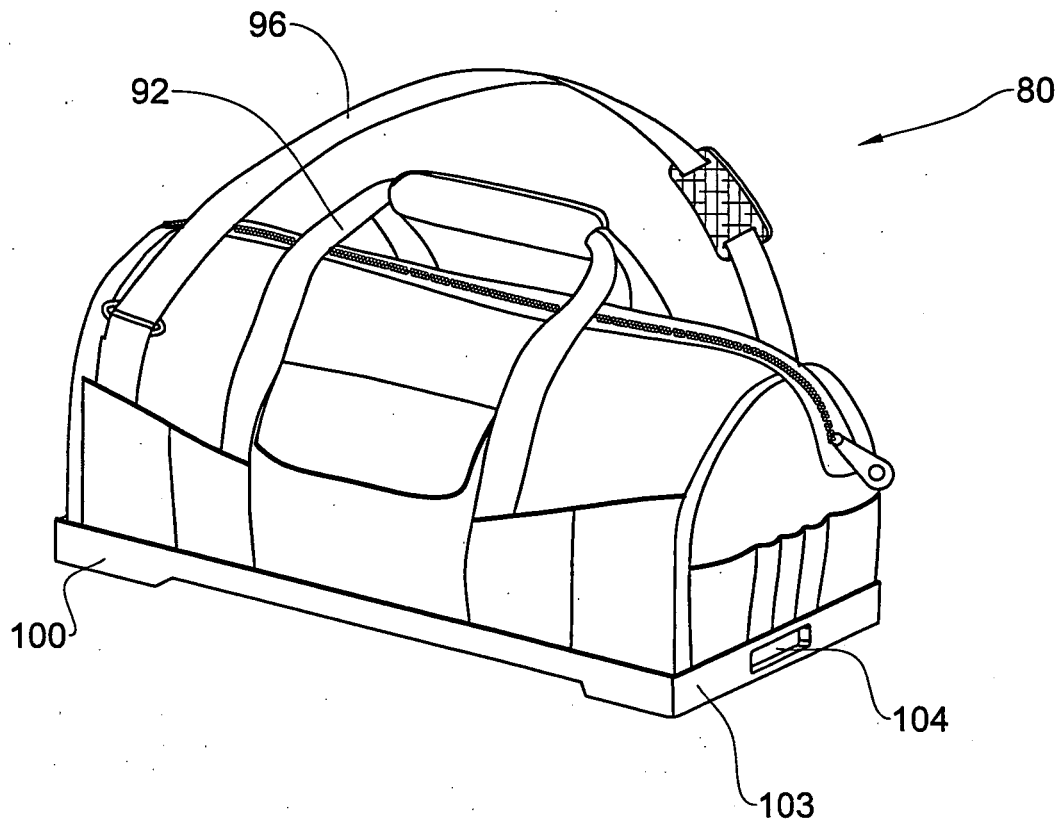


FIG. 2A

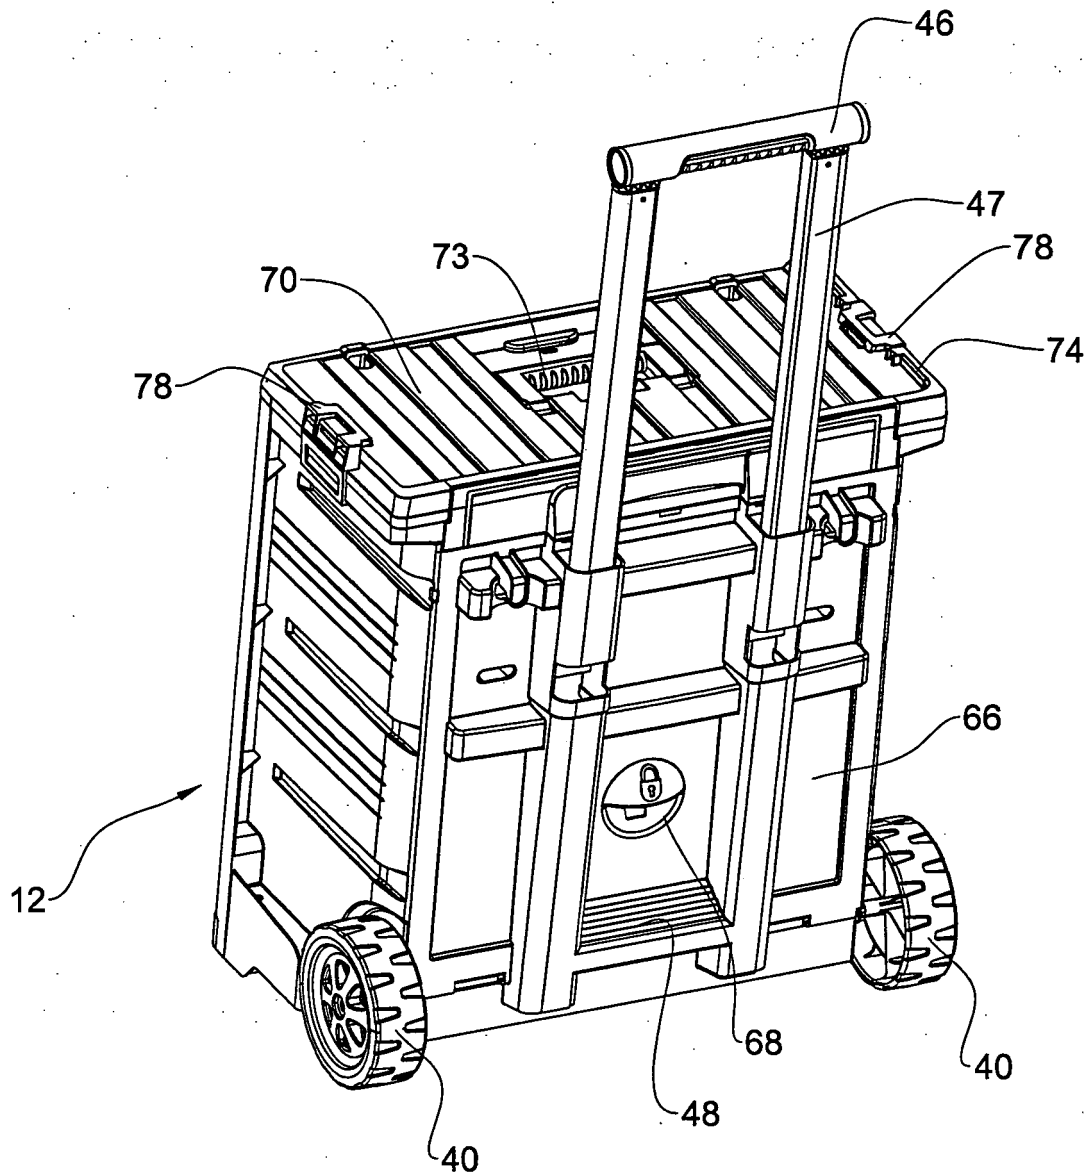


FIG. 2B

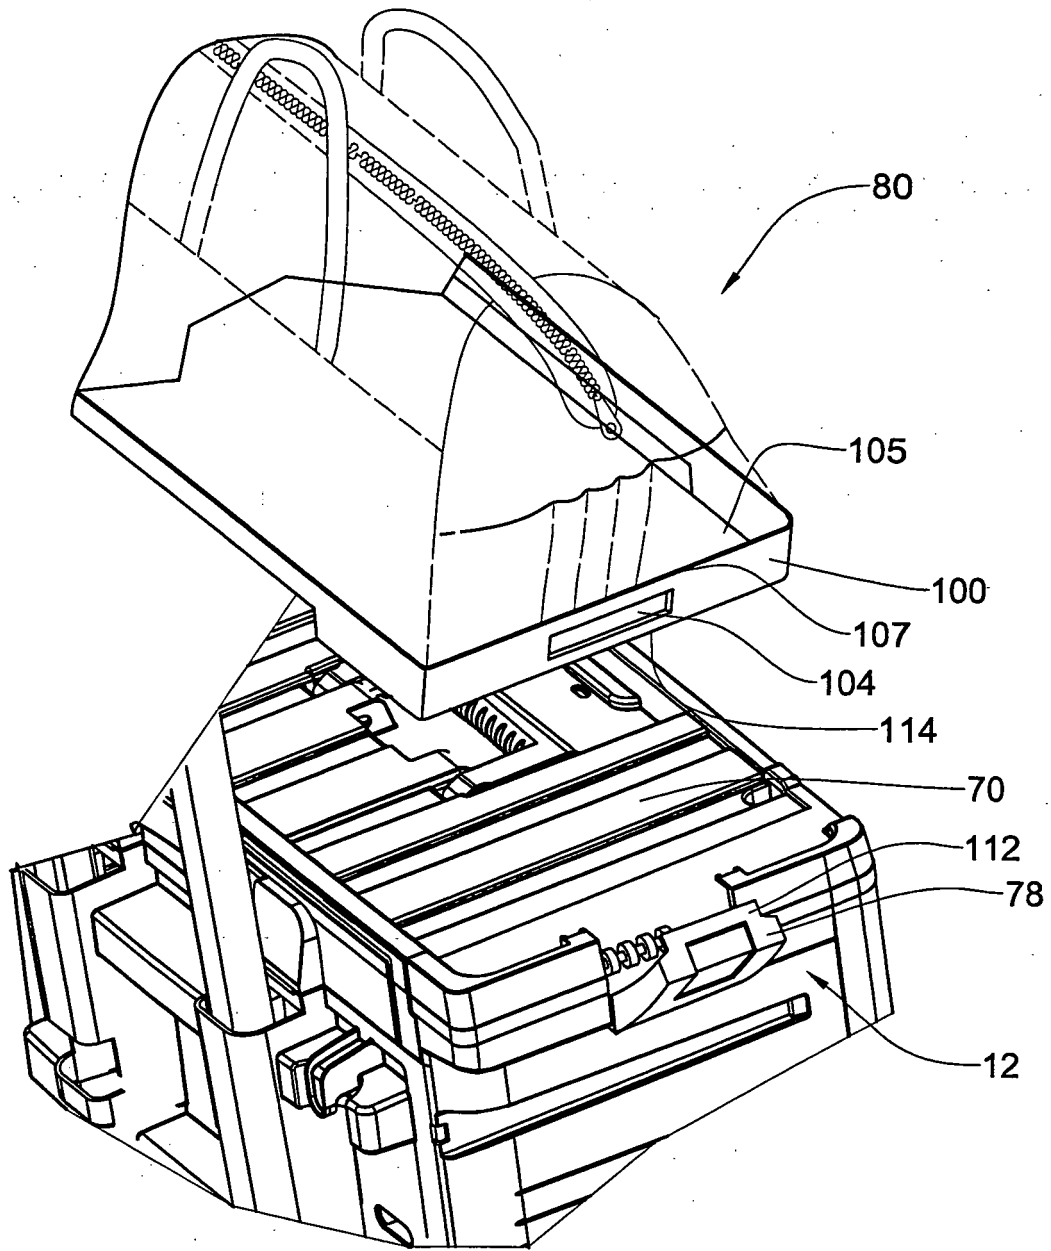


FIG. 3

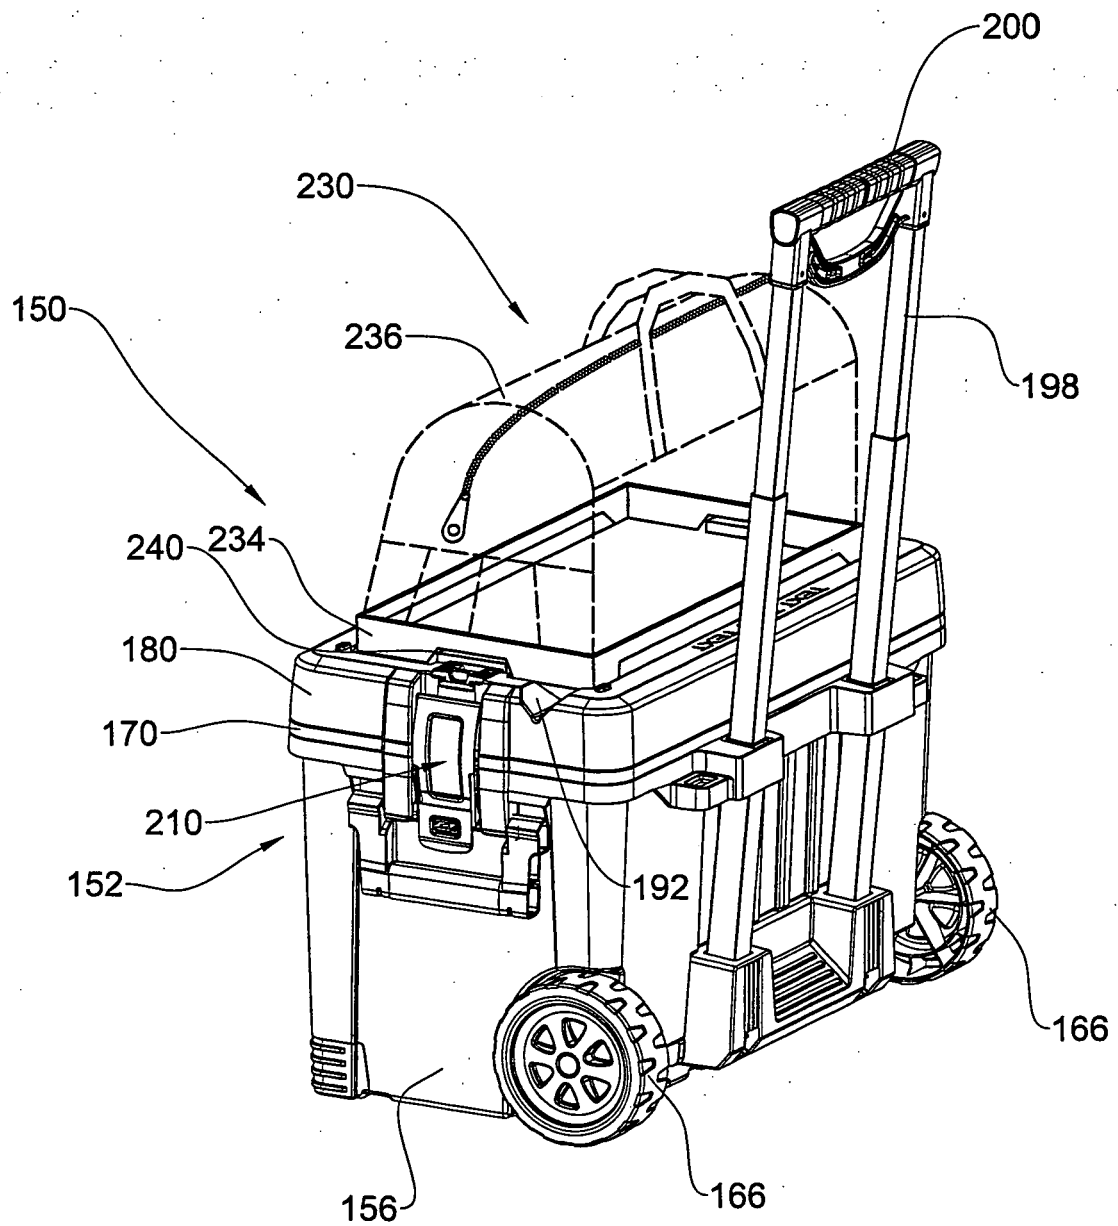


FIG. 4A

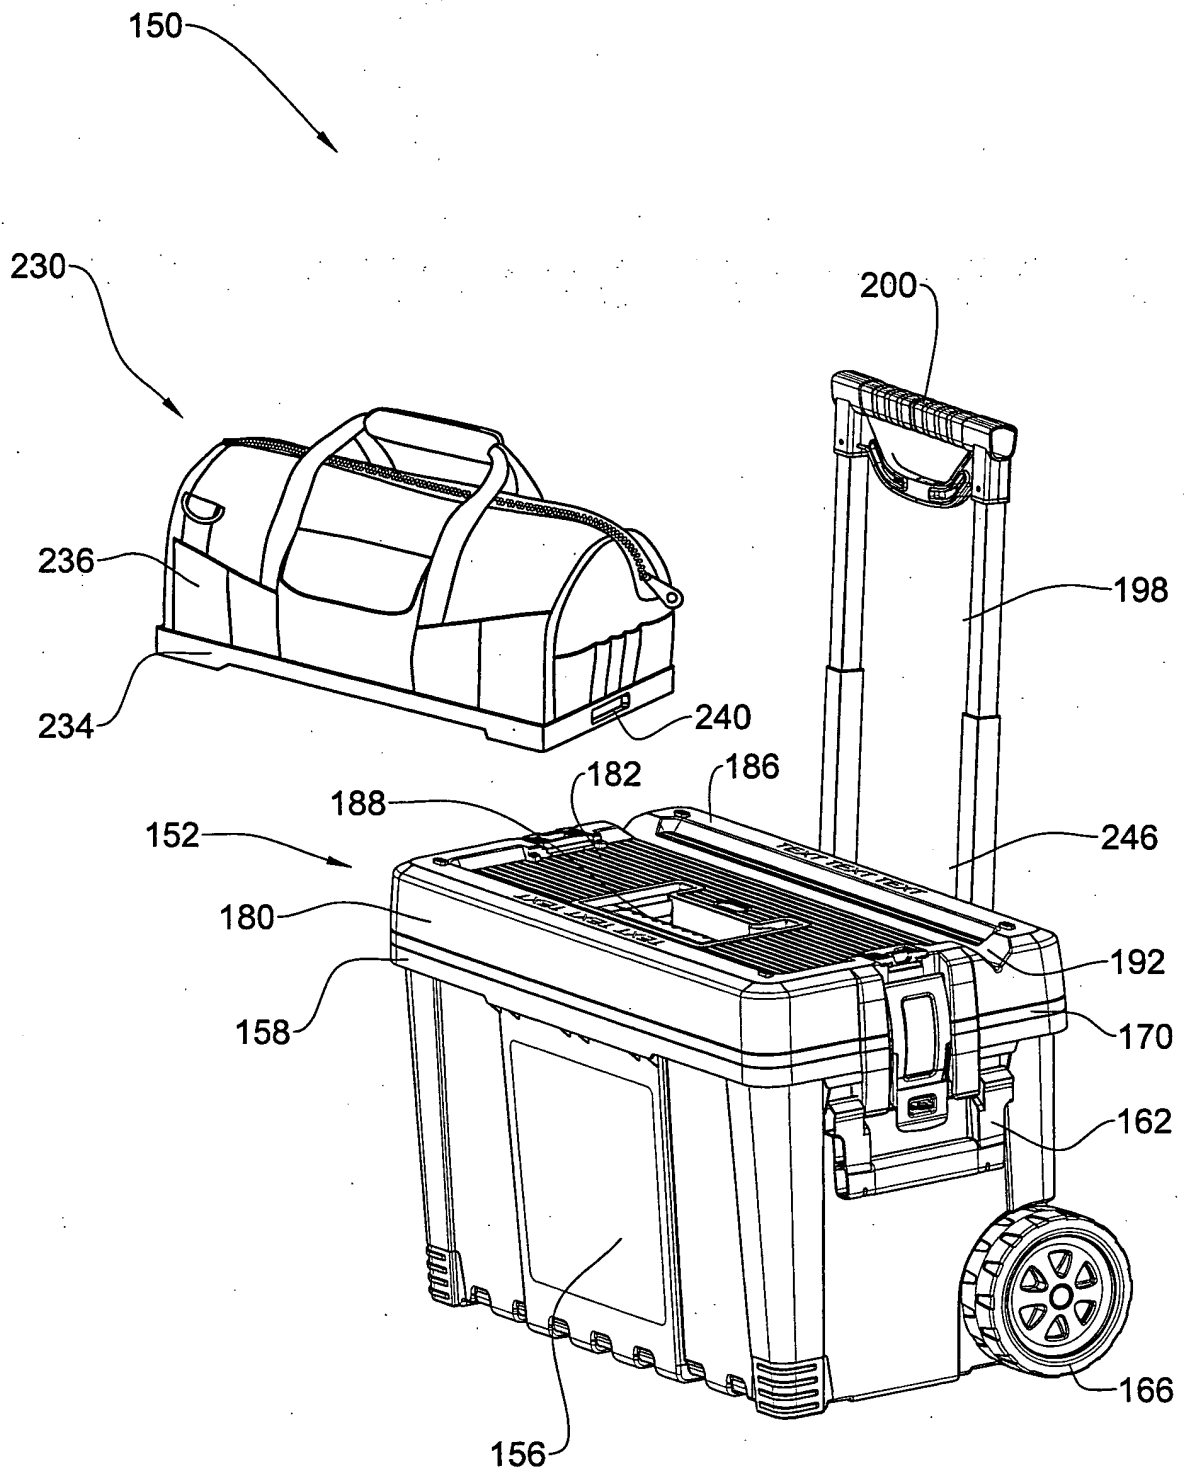


FIG. 4B

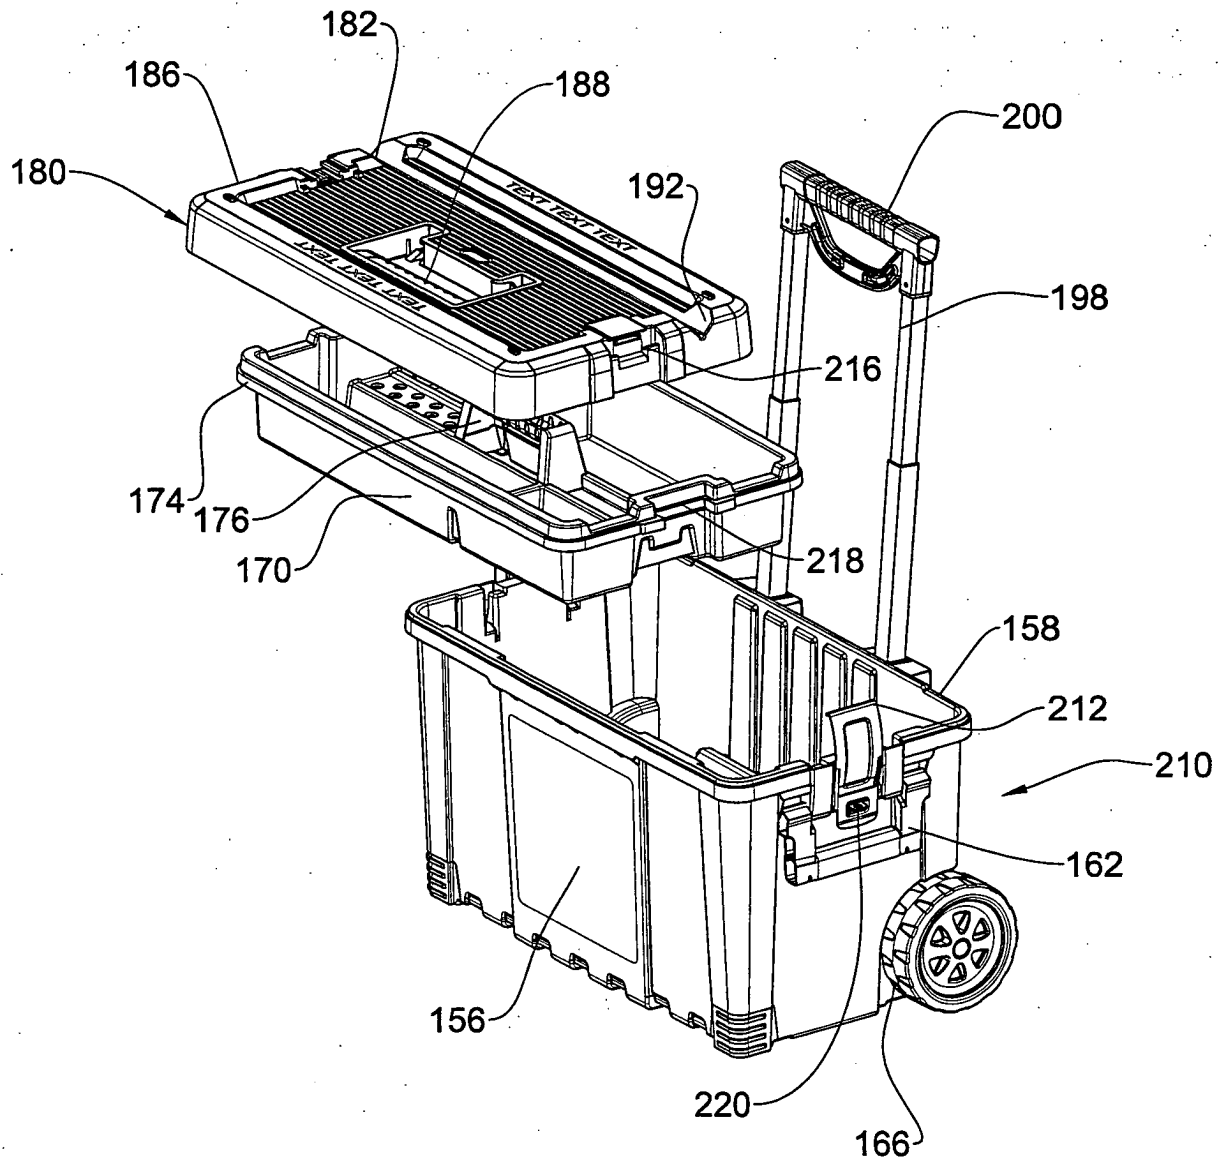


FIG. 5

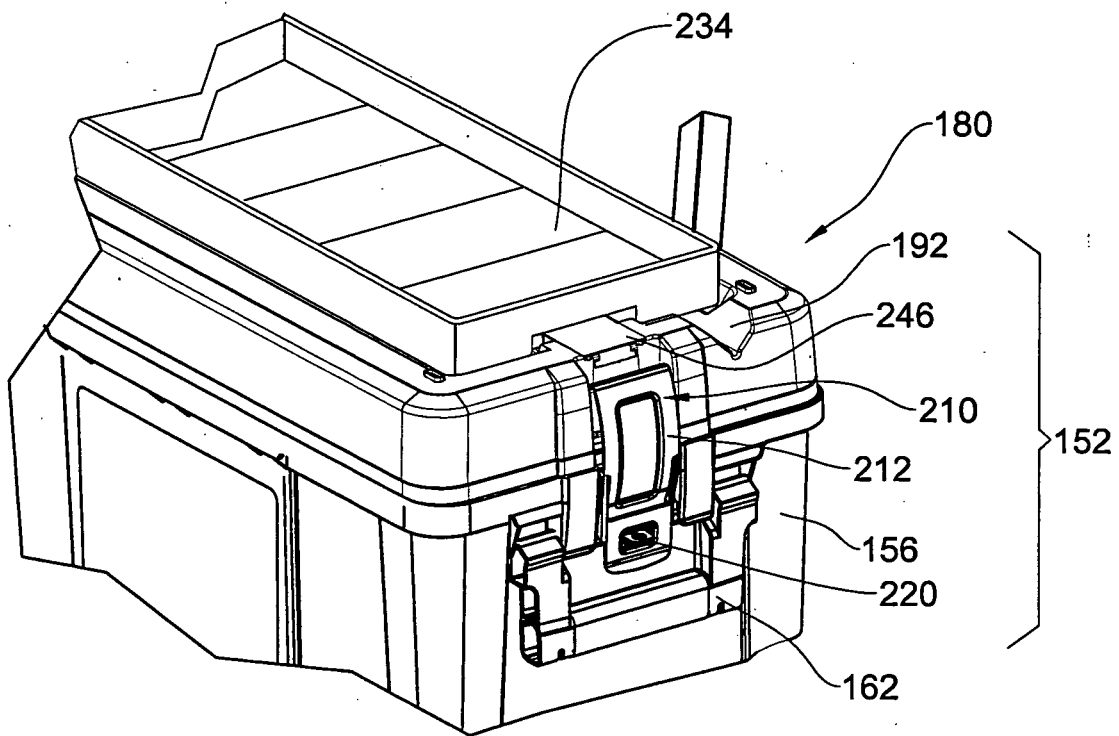


FIG. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6374847 B [0006] [0007]
- US 6371320 B [0008]
- US 5240264 A [0009]