



Model 375ST SpeedTender™ Seed Delivery System

375 Unit Tank Capacity

8" Belt Conveyor or 8" Poly-Cup Plastic Auger Unloading System



FEATURES

- Dual Compartments
- Lower Overall Tank Height (9'-9 1/2") for easier filling and greater stability during transport
- 3-Axle Undercarriage with Electric Brakes on ALL Axles
- Easy Glide™ Axle System
- High Reach 20' Auger / 21' Conveyor
- Larger Opening to Fill Corners of Tank
- Easy Access to Standard Electric Start 11 H.P. Honda® Engine
- Heavier Rated Ball Hitch Connector
- Roll Tarp Protects Valuable Contents
- Choice of Red, Green, Blue or Beige Exterior Finish
- Unloads up to 30 Bushels/Minute
- 11' Telescoping Spout
- Electronic scale system mounted between tank and chassis for accurate and complete unloading.



J. & M. Manufacturing Co., Inc. - Fort Recovery, Ohio, U.S.A.
www.jm-inc.com e-mail: sales@jm-inc.com telephone: 1.419.375.2376





Model 375ST SpeedTender™ Seed Delivery System

If you could sit down at the drawing board and design the perfect Seed Delivery system, what are the features you would want to have?

No shoveling required for a complete fill. Square tank design makes complete re-filling easy compared to clipped-corner tank designs.

Ladder folds down to allow for easy check of contents and folds up out of way for transport.

Front and Rear Bump Guards protect conveyor.

Diamond-plate guards, fenders and bumpers.

Easy access motor mounted on driver side for refueling.

2⁵/₁₆" ball hitch or 3" Lunette eye hitch

Divided tank allows you the flexibility to transport multi-crop or seed variety.

21' long conveyor is light weight and recommended for easy handling.

Top windows provide better visibility when re-filling.

Halogen lights come standard. Optional for Competitors

Comfort Grip handles. Hands won't get pinched when turning wheels and moving conveyor.

Welded handle for easy conveyor handling.

Conveyor can pivot a full 180° and locked into position every 2 inches.

Electronic scale system mounted between the tank and chassis, allowing the operator to accurately control the flow of seed as it leaves the tank, not the conveyor. This allows the operator to close the tank door when the target weight is reached and finish with an empty conveyor every time. Other systems that have the conveyor attached to the tank weigh the seed as it leaves the conveyor, not the tank. This is problematic, since the conveyor is still full of seed, requiring manual clean out.

Tool-less Spout Removal

We have listened . . . and built . . . just what you've been looking for!






Model 375ST SpeedTender™ Seed Delivery System

375 Unit Tank Capacity

8" Belt Conveyor or 8" Poly-Cup Plastic Auger Unloading System

DIMENSIONS

	Model 375ST8AU (with 8" poly-cup auger)	Model 375ST8BC (with 8" tube conveyor)
A	2'-4 3/4"	1'-10 1/4"
B	1'-5 5/8" (min.) 1'-9 5/8" (max.)	1'-5 5/8" (min.) 1'-9 5/8" (max.)
C	22'-3"	22'-3"
D	9'-11 1/2" (top of box) 9'-9 1/2" (top of box w/o scales)	9'-11 1/2" (top of box) 9'-9 1/2" (top of box w/o scales)
E	3'-3"	3'-3"
F	15'-10"	15'-10"
G	8'-6"	8'-6"
H	14'-8 1/4" (max.) 6'-10" (min.)	14'-8" (max.) 6'-8" (min.)
I	14'-10 1/4" (max.) 10'-10" (min.)	14'-7" (max.) 10'-2" (min.)
J	10'-7" (Overall Height) 10'-4 1/2" (Overall Height w/o scales)	10'-7" (Overall Height) 10'-4 1/2" (Overall Height w/o scales)

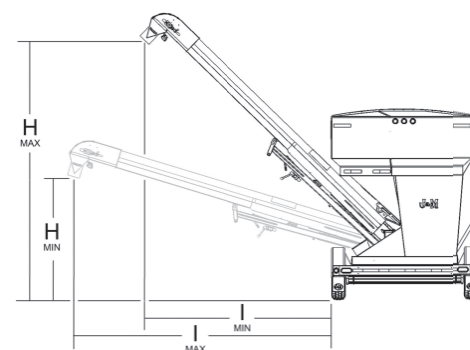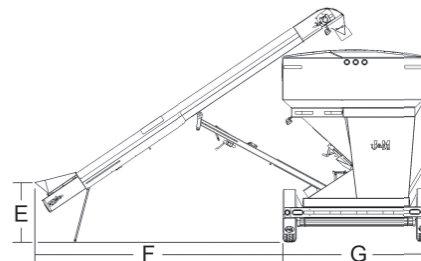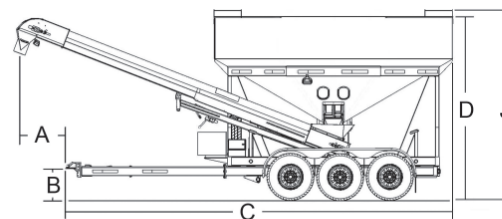

PRODUCT FEATURES



SPT-AF1 Deluxe All Function Control hydraulically opens/closes the tank doors, raises/lowers the conv./auger and starts/stops the auger or conveyor.



Optional wireless remote



Auger/Conveyor base pivots a full 180 degrees and can be locked into position in 2" increments. Optional cover shown below.



Driver side mounted 11 HP Honda Electric Start Engine.



375STWS Scale System with 640XL Indicator.



Ladder folds down to easily check contents, then stores up and out of the way for transport.



* Auger is recommended for Tall Bulk Fill Planters
* Specifications are subject to change without notice or obligation.

J. & M. Manufacturing Co., Inc. - Fort Recovery, Ohio, U.S.A.
www.jm-inc.com e-mail: sales@jm-inc.com telephone: 1.419.375.2376

