



US008499250B2

(12) **United States Patent**
Wetzer et al.

(10) **Patent No.:** **US 8,499,250 B2**
(45) **Date of Patent:** **Jul. 30, 2013**

(54) **APPARATUS AND METHODS FOR INTERACTING WITH MULTIPLE INFORMATION FORMS ACROSS MULTIPLE TYPES OF COMPUTING DEVICES**

6,219,045 B1 4/2001 Leahy et al.
6,259,448 B1 * 7/2001 McNally et al. 715/733
6,396,513 B1 * 5/2002 Helfman et al. 715/752

(Continued)

(75) Inventors: **Michael Wetzer**, Fayetteville, NY (US);
Thomas Theriault, Baldwinsville, NY (US); **Mark Dingman**, Tully, NY (US);
Rupert Key, Woodley Reading (GB)

FOREIGN PATENT DOCUMENTS

JP 06-062142 4/1994
JP 2006-053799 2/2006
WO WO 2004/066105 8/2004

OTHER PUBLICATIONS

Premium Agency, Inc. Develops "MAJUA," Japan's First 3-d HD-Quality In-browser Plugin, Dec. 1, 2008, <http://www.premiumagency.com/majua/>.

(Continued)

(21) Appl. No.: **12/465,331**

(22) Filed: **May 13, 2009**

(65) **Prior Publication Data**

US 2010/0122196 A1 May 13, 2010

Related U.S. Application Data

(60) Provisional application No. 61/052,765, filed on May 13, 2008.

(51) **Int. Cl.**
G06F 3/48 (2013.01)

(52) **U.S. Cl.**
USPC **715/769**; 715/810; 715/835; 715/764;
715/757; 726/4; 725/39; 725/46; 345/632;
345/158

(58) **Field of Classification Search**
USPC 715/769
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,742,286 A * 4/1998 Kung et al. 715/839
6,189,008 B1 2/2001 Easty et al.

Primary Examiner — William Bashore


Assistant Examiner — Reza Nabi

(74) *Attorney, Agent, or Firm* — Foley & Lardner LLP;
Joseph Teja, Jr.; Brett P. Belden

(57) **ABSTRACT**

A system and method for interacting with multiple information forms across multiple types of computing devices and platforms is provided. A computer-readable storage media for interacting with multiple information forms across computing devices is also provided and includes computer-readable instructions to cause one or more computer processors to execute operations including authenticating a user; establishing a channel grid framework for the user on a first platform, the channel grid framework providing access to a first computer application displayed on a display device as a channel; deploying the channel from the channel grid framework on the first platform to a second platform in response to a user selecting the channel from the channel grid framework on the first platform and performing a copy operation of the channel to the second platform; and establishing a run time application of the first computer application on the second platform.

36 Claims, 5 Drawing Sheets

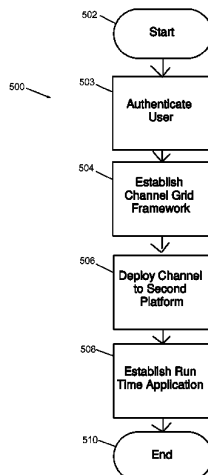

U.S. PATENT DOCUMENTS

6,658,432	B1	12/2003	Alavi et al.	
6,671,715	B1	12/2003	Langseth et al.	
6,694,316	B1	2/2004	Langseth et al.	
6,724,403	B1	4/2004	Santoro et al.	
6,741,980	B1	5/2004	Langseth et al.	
7,028,264	B2	4/2006	Santoro et al.	
7,181,417	B1	2/2007	Langseth et al.	
7,375,678	B2 *	5/2008	Feyereisen et al.	342/180
7,376,907	B2 *	5/2008	Santoro et al.	715/765
7,478,337	B2 *	1/2009	Kodosky et al.	715/771
7,564,469	B2 *	7/2009	Cohen	345/632
7,627,860	B2 *	12/2009	Kodosky et al.	717/141
7,681,230	B2 *	3/2010	O'Brien	726/4
7,793,232	B2	9/2010	Chaudhri et al.	
7,849,226	B2	12/2010	Zigmond et al.	
7,873,371	B2 *	1/2011	Oberg et al.	455/456.3
7,933,632	B2	4/2011	Flynt et al.	
7,979,854	B1 *	7/2011	Borole et al.	717/172
7,996,862	B2	8/2011	Babu	
8,001,379	B2 *	8/2011	Daskalopoulos et al.	713/168
8,051,472	B2 *	11/2011	Maes	726/8
8,086,853	B2 *	12/2011	Warwick	713/168
2002/0122063	A1 *	9/2002	Weinberg et al.	345/764
2003/0018967	A1	1/2003	Gorbatov et al.	
2003/0018972	A1	1/2003	Arora	
2003/0035010	A1 *	2/2003	Kodosky et al.	345/771
2003/0058277	A1	3/2003	Bowman-Amuah	
2003/0084436	A1	5/2003	Berger	
2003/0184595	A1 *	10/2003	Kodosky et al.	345/810
2004/0003247	A1 *	1/2004	Fraser et al.	713/169
2004/0015367	A1 *	1/2004	Nicastro et al.	705/1
2004/0082345	A1	4/2004	Lueckhoff	
2004/0148184	A1	7/2004	Sadiq	
2005/0027676	A1	2/2005	Eichstaedt et al.	
2005/0086612	A1 *	4/2005	Gettman et al.	715/848
2005/0114881	A1	5/2005	Philyaw	
2005/0137981	A1 *	6/2005	Maes	705/44
2005/0172018	A1 *	8/2005	Devine et al.	709/223
2005/0203771	A1 *	9/2005	Achan	705/2
2005/0246415	A1	11/2005	Belfiore et al.	
2005/0278741	A1	12/2005	Robarts et al.	
2006/0015818	A1	1/2006	Chaudhri et al.	
2006/0061580	A1	3/2006	Fujiwara et al.	
2006/0271953	A1	11/2006	Jacoby et al.	
2006/0271959	A1	11/2006	Jacoby et al.	
2006/0271960	A1 *	11/2006	Jacoby et al.	725/46
2006/0271961	A1	11/2006	Jacoby et al.	
2006/0271997	A1	11/2006	Jacoby et al.	
2006/0277469	A1	12/2006	Chaudhri et al.	
2006/0282312	A1	12/2006	Carlson et al.	
2007/0018887	A1 *	1/2007	Feyereisen et al.	342/176
2007/0083616	A1	4/2007	Madden	
2007/0083911	A1	4/2007	Madden et al.	
2007/0088952	A1 *	4/2007	Hewitt et al.	713/171
2007/0101291	A1	5/2007	Forstall et al.	
2007/0101297	A1	5/2007	Forstall et al.	
2007/0101368	A1	5/2007	Jacoby et al.	
2007/0101433	A1	5/2007	Louch et al.	
2007/0118813	A1	5/2007	Forstall et al.	
2007/0124663	A1	5/2007	Fischer et al.	
2007/0130541	A1	6/2007	Louch et al.	
2007/0162850	A1	7/2007	Adler et al.	
2007/0189737	A1	8/2007	Chaudhri et al.	
2007/0192823	A1 *	8/2007	Andersen et al.	726/1
2007/0223462	A1 *	9/2007	Hite et al.	370/356
2008/0005798	A1 *	1/2008	Ross	726/26
2008/0028338	A1 *	1/2008	Kodosky et al.	715/835

2008/0034309	A1	2/2008	Louch et al.	
2008/0034314	A1	2/2008	Louch et al.	
2008/0066011	A1	3/2008	Urrabazo et al.	
2008/0104513	A1	5/2008	Krogh	
2008/0111818	A1 *	5/2008	Stambaugh	345/440
2008/0120327	A1	5/2008	Bhat	
2008/0126989	A1	5/2008	Flores et al.	
2008/0129725	A1	6/2008	Stambaugh	
2008/0141170	A1 *	6/2008	Kodosky et al.	715/810
2008/0141174	A1 *	6/2008	Kodosky et al.	715/835
2008/0150963	A1	6/2008	Stambaugh	
2008/0168185	A1	7/2008	Robbin et al.	
2008/0168245	A1	7/2008	De Atley et al.	
2008/0168391	A1	7/2008	Robbin et al.	
2008/0168526	A1	7/2008	Robbin et al.	
2008/0172173	A1 *	7/2008	Chang et al.	701/207
2008/0172625	A1 *	7/2008	Montgomery	715/764
2008/0172632	A1	7/2008	Stambaugh	
2008/0207327	A1 *	8/2008	Van Luchene et al.	463/42
2008/0235601	A1	9/2008	Fried et al.	
2008/0256643	A1	10/2008	Jones et al.	
2009/0013263	A1 *	1/2009	Fortnow et al.	715/753
2009/0018712	A1 *	1/2009	Duncan et al.	701/2
2009/0025025	A1	1/2009	Vleck	
2009/0091578	A1	4/2009	Carnahan et al.	
2009/0113481	A1 *	4/2009	Friedman	725/46
2009/0132942	A1	5/2009	Santoro et al.	
2009/0231128	A1	9/2009	Watson et al.	
2009/0249069	A1 *	10/2009	Daskalopoulos et al.	713/169
2009/0254842	A1 *	10/2009	Leacock et al.	715/757
2009/0259972	A1 *	10/2009	Kodosky et al.	715/810
2009/0287914	A1 *	11/2009	Shah et al.	713/1
2010/0017722	A1 *	1/2010	Cohen	715/740
2010/0031334	A1	2/2010	Shaik	
2010/0058188	A1 *	3/2010	Shah et al.	715/734
2010/0080298	A1	4/2010	Hang et al.	
2010/0083189	A1	4/2010	Arlein et al.	
2010/0122196	A1	5/2010	Wetzer et al.	
2010/0131443	A1	5/2010	Agarwal	
2010/0162172	A1	6/2010	Aroner	
2010/0254370	A1	10/2010	Jana	
2010/0274859	A1 *	10/2010	Bucuk	709/206
2010/0281107	A1	11/2010	Fallows	
2010/0299640	A1 *	11/2010	Titus	715/848
2010/0313146	A1 *	12/2010	Nielsen et al.	715/757
2011/0161234	A1 *	6/2011	Cuellar et al.	705/75
2011/0252132	A1 *	10/2011	Wetzer et al.	709/224
2011/0252460	A1 *	10/2011	Wetzer et al.	726/4
2011/0252461	A1 *	10/2011	Wetzer et al.	726/4
2011/0258573	A1 *	10/2011	Wetzer et al.	715/775
2012/0096267	A1 *	4/2012	Daskalopoulos et al.	713/169

OTHER PUBLICATIONS

Project Wonderland Toolkit for Building 3D Virtual Worlds, Ig3d-wonderland: Project Wonderland, Mar. 5, 2009, <https://Ig3d-wonderland.dev.java.net/>.

Linden Lab, How Meeting in Second Life Transformed IBM's Technology Elite Into Virtual World Believers, pp. 1-8.

Project Darkstar, Project Darkstar Community-Home, Mar. 5, 2009, <http://www.projectdarkstar.com/>.

International Search Report, PCT/US04/35537, Jun. 24, 2009.

Extended European Search Report corresponding to EP Application No. 09747470.4.

International Search Report and Written Opinion issued on May 10, 2012 in PCT/US2012/022406.

* cited by examiner

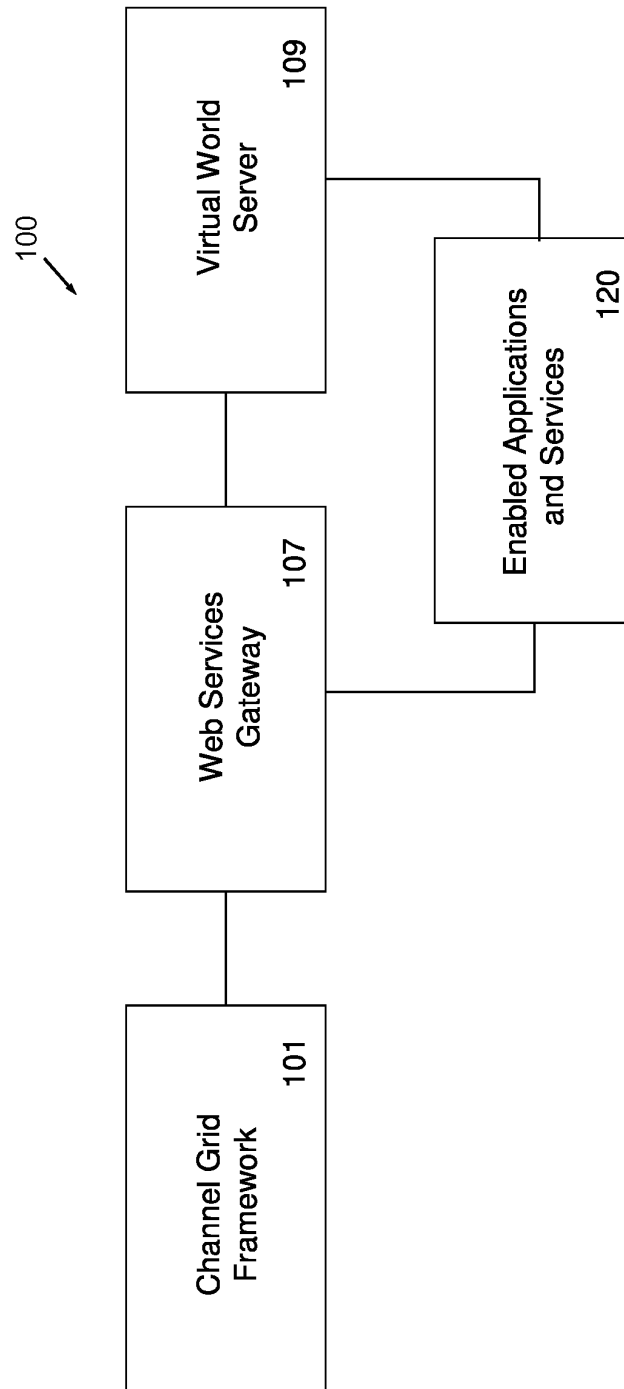


FIG. 1

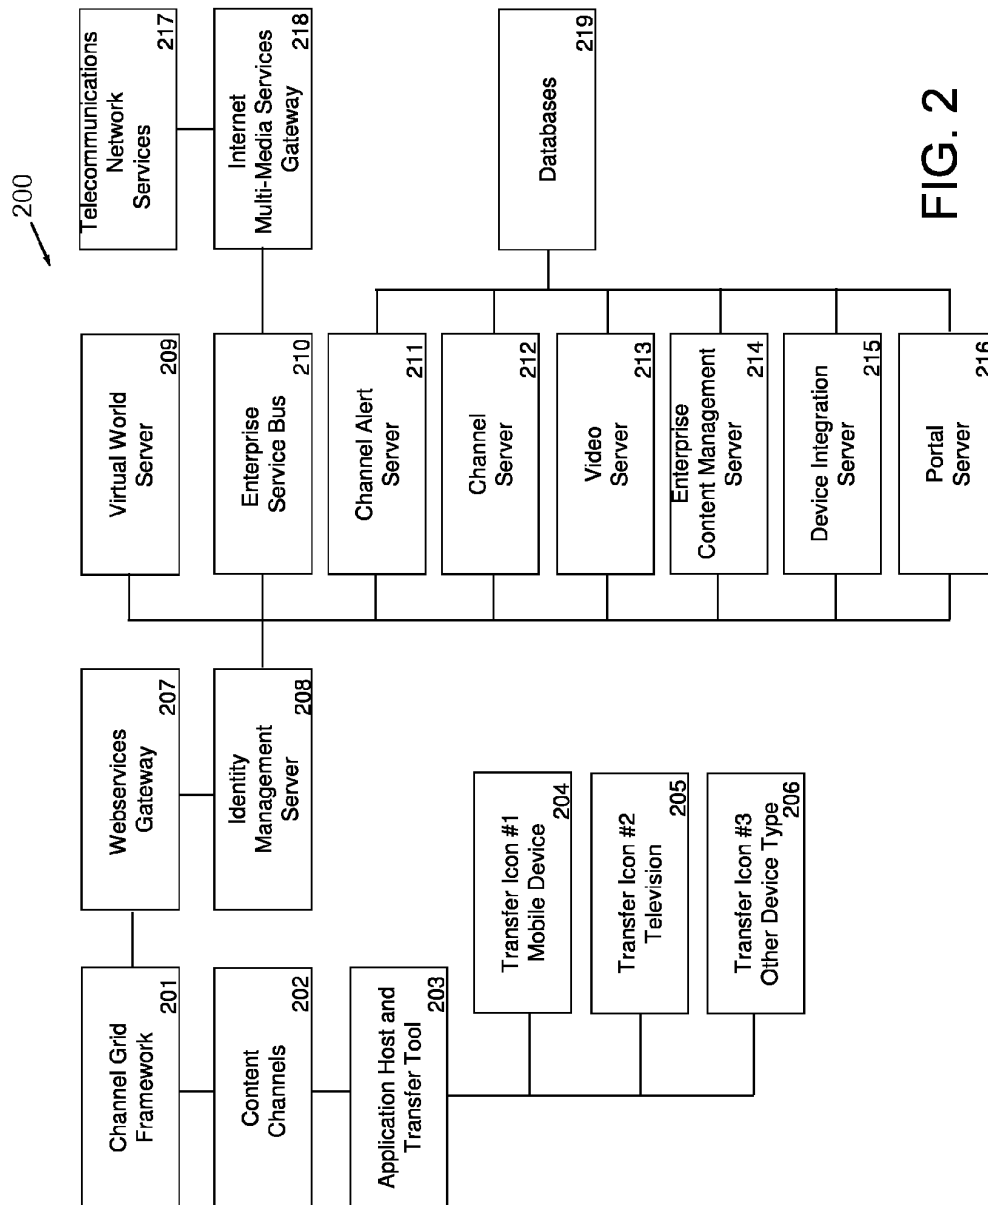


FIG. 2

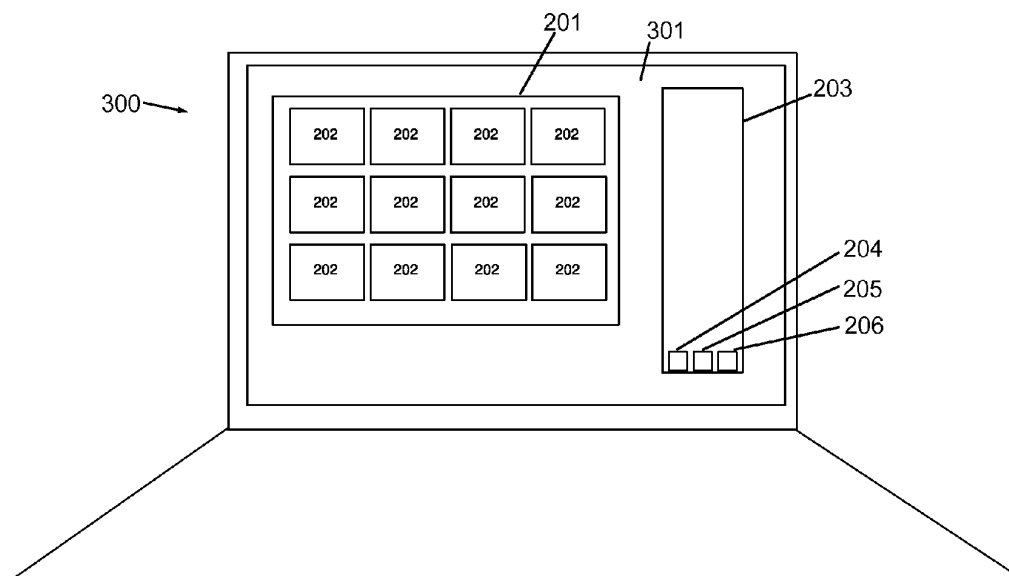
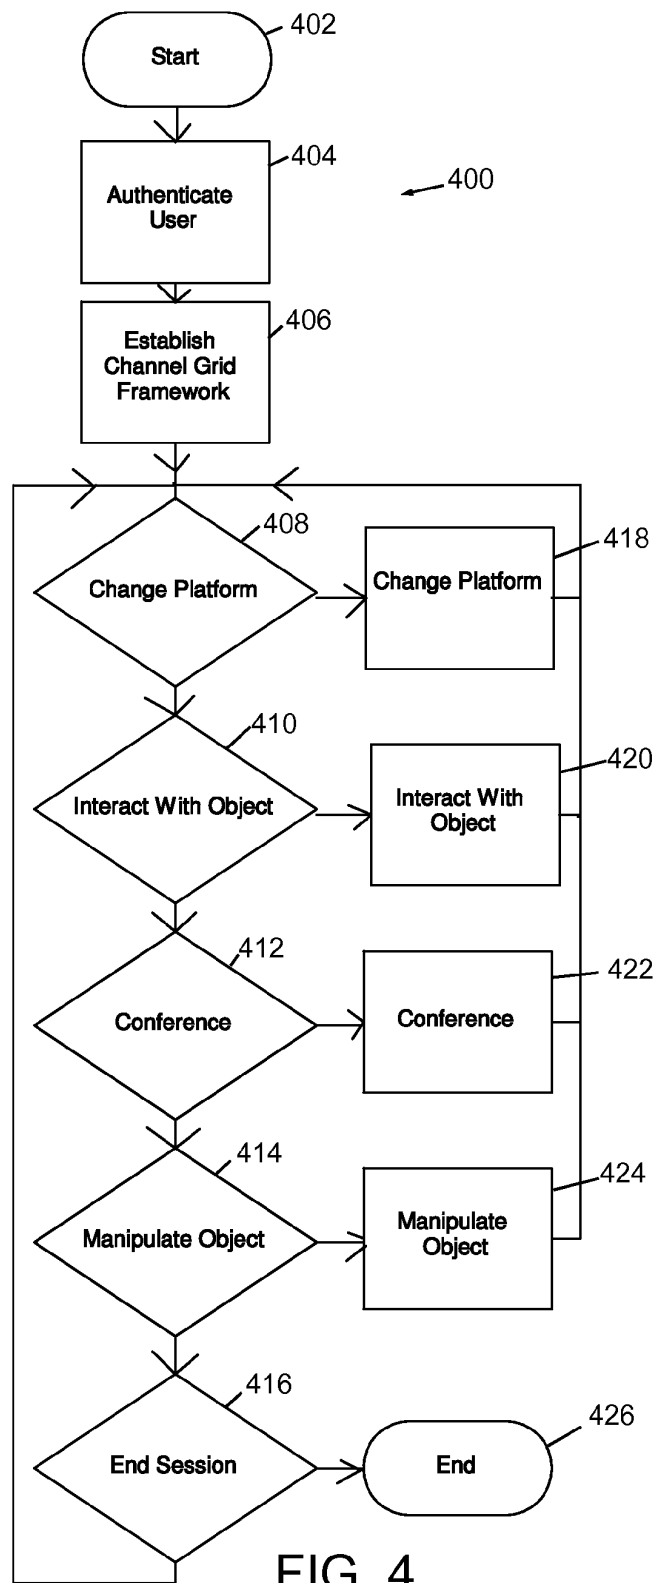


FIG. 3



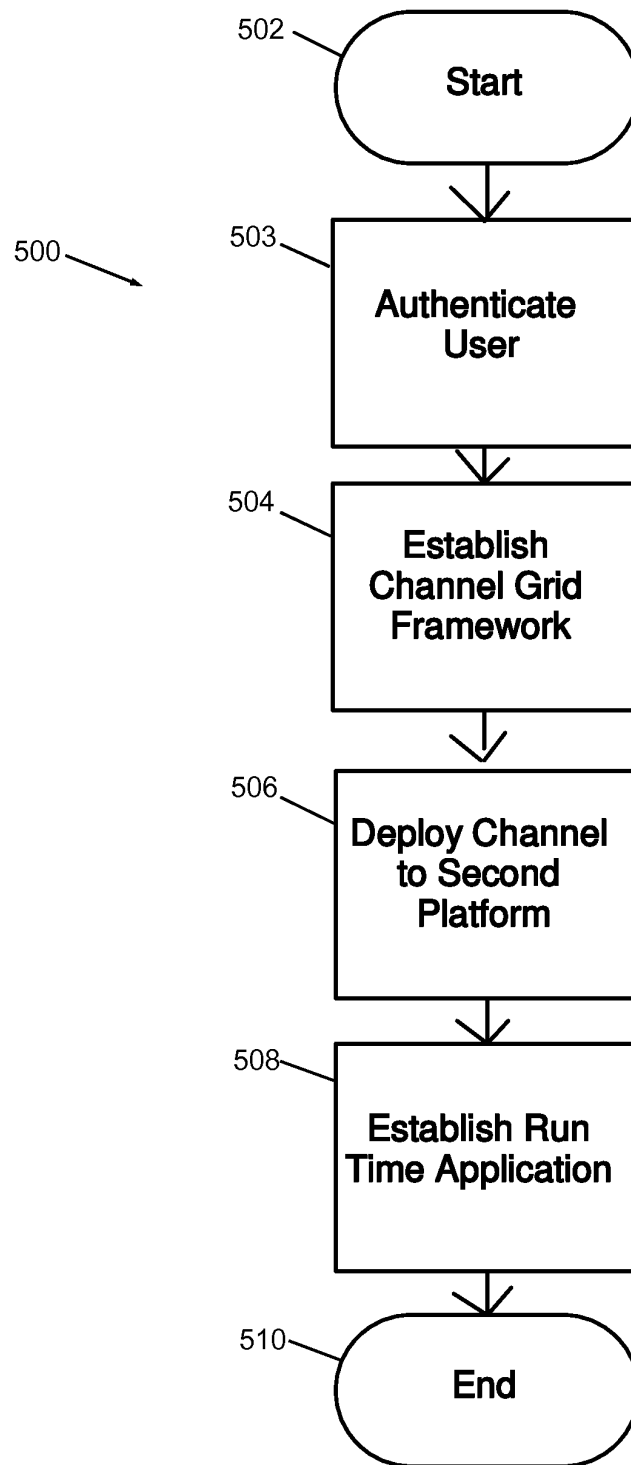


FIG. 5

1

APPARATUS AND METHODS FOR INTERACTING WITH MULTIPLE INFORMATION FORMS ACROSS MULTIPLE TYPES OF COMPUTING DEVICES

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims the benefit of U.S. Provisional Patent Application Ser. No. 61/052,765 filed May 13, 2008, and entitled SYSTEM AND METHOD FOR CONDUCTING BUSINESS IN A VIRTUAL WORLD OR METAVERSE, which is herein incorporated by reference in its entirety.

BACKGROUND

1. Field of Invention

Embodiments of the present invention relate generally to user-centric information convergence and, more particularly, to apparatus and methods for interacting with multiple information forms across multiple types of computing devices and platforms.

2. Description of the Related Art

Significant strides have been made in creating digital/digitized content of many varieties, including text, graphics, pictures, video, streaming real-time video, remote device control/interaction, three dimensional ("3D") graphic visualization of objects and digital sound.

Dissimilar evolutions of device interfaces on platforms such as computer desktop/laptop screens, mobile devices, and special use displays have created many content interaction metaphors. Users have had to accept that these different physical devices require expertise in each format to make them useful. Information utility has grown and similar content can now be accessed from dissimilar devices but with differing access methods and metaphors.

Browsers were the Internet's early solution to creating a "window" or "portal" onto personalizable content to manage the proliferation and exponentially expanding amount of electronically available information. Some consumer interface technologies have focused on simplification and ease of use. These technologies (ex. Google® or Apple® products) utilize icons and simple text entry to improve usability and simplicity while utilizing sophisticated computing methods to keep the users' display of information to a minimum. These technologies largely remain text or two-dimensional ("2D") graphic-centric.

3D data visualization methods have been limited to narrow deployment largely in the technical Computer Aided Design ("CAD") fields where sophisticated users with specialized training manipulated specialized applications. Advances in 3D gaming technologies have created low cost and mass availability of sophisticated visualization, sound and animation of information, however they lack useful business application due to their primary focus on the user/player's point-of-reference. Gaming technologies treat objects within the 3D framework for visual reference and are poorly suited for complex and cross platform information management solutions.

Therefore, there is a need for a solution that addresses the above and other problems.

BRIEF SUMMARY OF THE INVENTION

Aspects of the present invention provide a system, method, and computer program product for interacting with multiple

2

information forms across multiple types of computing devices, including interactive displays and communication devices, without the shortcomings of previous systems. A system, method, and computer program product in accordance with the present invention may employ a universal grid of channels to engage in context relevant interactions with any type of content and the content's representation as a selectable item, such as a graphic, picture, video, and the like.

According to an aspect of the invention, a computer-readable storage media is provided for interacting with multiple information forms across computing devices. The computer-readable storage media may include computer-readable instructions configured to cause one or more computer processors to execute the operations including authenticating a user, establishing a channel grid framework for the user on a first platform where the channel grid framework provides access to a first computer application displayed on a display device as a channel. The computer-readable storage media may further include computer-readable instructions configured to cause one or more computer processors to also execute the operations including deploying the channel from the channel grid framework on the first platform to a second platform in response to a user selecting the channel from the channel grid framework on the first platform and performing a copy operation of the channel to the second platform and establishing a run time application of the first computer application on the second platform.

These and other advantages, aspects, and features of the present invention will become more apparent from the following detailed description of embodiments and implementations of the present invention when viewed in conjunction with the accompanying drawings. The present invention is also capable of other embodiments and different embodiments, and details can be modified in various respects without departing from the spirit and scope of the present invention. Accordingly, the drawings and descriptions below are to be regarded as illustrative in nature, and not as restrictive.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings illustrate an embodiment of the invention and depict the above-mentioned and other features of this invention and the manner of attaining them. In the drawings:

FIG. 1 illustrates a block diagram of a system for conducting business in a virtual world in accordance with an embodiment of the present invention.

FIG. 2 illustrates a block diagram of a system and method for interacting with multiple information forms across multiple types of platforms in accordance with an embodiment of the present invention.

FIG. 3 illustrates a schematic representation of a computer display device displaying a channel grid framework in accordance with an embodiment of the present invention.

FIG. 4 illustrates a flowchart of an exemplary method of interacting with a channel in accordance with an embodiment of the present invention.

FIG. 5 illustrates a flowchart of a method of transferring a channel from a first platform to a second platform in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

The following detailed description of the invention refers to the accompanying drawings and to certain preferred embodiments, but the detailed description does not limit the invention. The scope of the invention is defined by the

appended claims and equivalents as it will be apparent to those of skill in the art that various features, variations, and modifications can be included or excluded based upon the requirements of a particular use.

As used in this application, the terms “a”, “an” and “the” may refer to one or more than one of an item. The terms “and” and “or” may be used in the conjunctive or disjunctive sense and will generally be understood to be equivalent to “and/or.” For brevity and clarity, a particular quantity of an item may be described or shown while the actual quantity of the item may differ, and features from one embodiment may be combined with features of another embodiment. By way of non-limiting example, various components (e.g., channel grid framework **101**, content channels **202**, and the like) are described and shown, which may perform various functions and interact with each other. These components may be segregated based on their function merely for the sake of description and may represent computer hardware and executable software code which may be stored on a computer-readable storage medium for execution on appropriate computing hardware. The various functions of the different components may be combined or segregated as hardware or software stored on a computer-readable medium in any manner, and may be used separately or in combination.

As can be appreciated from the above discussion, electronic information users are confronted with ever increasing amounts of data. Information technologies are moving beyond traditional computing terminals and equipment onto mobile, television and other special-use displays. Dissimilar formats compounded with increasing amounts of digital content are overwhelming users with data. Information users are now wasting their time locating, putting into context, consolidating, managing multiple versions of, and understanding what is truly meaningful. Users then spend insufficient time contemplating contexts and acting on the information. Inefficiency is increasing and productivity declining. Consumers have a problem meaningfully understanding and efficiently consuming the vast amount of content.

In accordance with an embodiment of the present invention, a common and efficient utility may be provided to interact with multiple information forms across multiple types of computers, interactive displays, and communication devices (“platforms”), in a more effective and efficient manner. Users may define the type and manner of delivery of information. The term “information” should be broadly interpreted to include, by way of non-limiting example, any appropriate type of content or data. Non-limiting examples may include text, graphics, pictures, video, streaming real-time video, remote device control/interaction, 3D graphic visualization of objects, and digital sound. Likewise, the phrase “information forms” as used herein is intended to be synonymous with “information.” The term “platforms” should be broadly interpreted to include, by way of non-limiting example, computers, communication devices, and other computing devices. Non-limiting examples include servers, networks of servers, desktop computers, laptop computers, tablet computers, netbook computing devices, telephones, cell phone devices, handheld devices, smart phones, interactive displays, personal digital assistants (PDAs), portable digital assistants, enterprise digital assistants, personal navigation devices, network connected devices, Blu-ray players (or other optical disk players with network access), in-vehicle devices, televisions (set top boxes), virtual machines, and game consoles. Likewise, the term devices used herein is intended to be synonymous.

Information may be delivered to a user based on the user’s identity as established by the system when the user’s session

is established. Because the user is known and authenticated, preferences and rights to certain information types can be defined and managed for the user.

Information relevant to the user may be presented in, by way of non-limiting example, a twelve item grid in the form of “channels.” These channels may be preconfigured and may contain any information format. Non-limiting examples include streaming video, audio, voice-over-IP communication, environmental monitoring information, financial services information, enterprise resource planning information, building information modeling, product lifecycle management information, project management information, immersive 3D environments, video conferencing information, RSS reader information, channel application repository information, end-user preferences and localization information, word processing documents, spreadsheets, presentation/slide shows, email, address book information, instant messaging information, enterprise content management information, text, graphics, pictures, video, remote device control/interaction, and 3D graphic visualization of objects. Each channel may be configured to perform complex functions both in how the information is synthesized and delivered as well as what the user may do with it (as may be driven by the identify and authorization granted to the user). The channels may be represented in 2D or 3D form across multiple types of platforms.

The assignment of information priority, event alerts or triggers, and complex actions that can result from the user’s interaction with a channel may be built upon and exploited by developers. A development tool or facility may be provided to a developer to create many forms of customization. Triggers may be parameterized against information behavior. Non-limiting examples of triggers may include exceeding a quantified numerical limit and multiple similar events trending in a certain direction. The trigger may cause the information channel to change its appearance or to take other actions that may be implemented by the developer. By way of non-limiting example, one action that may be implemented is to provide a notification to the user.

With respect to the information in a channel, the user may take action by touching, clicking, or otherwise interacting with the channel. Based on the access rights assigned to an individual and the underlying actions enabled through the channel’s design, immediate response to an event or a complex logic chain that formed the event may occur. In some instances, the information may require deeper understanding, in which case the channel may expand to more channels, more information, or into a 3D form to aid rapid and effective understanding.

3D representation of objects and other users may be available seamlessly to facilitate context relevant interaction with an easy-to-understand representation of a physical place, object, people, or other users. Touching, clicking, or otherwise interacting with objects or participating users may enable conditional logic to drive further visualization or actions. Events and actions may be carried out from two dimensions to be viewed within a 3D representation. Objects may appear to live in this virtual or representative world (meta-verse) indefinitely on demand from digital representations that may exist in databases as needed.

FIG. 1 illustrates a block diagram of a system **100** for conducting business in a virtual world in accordance with an embodiment of the present invention. The system **100** may include a channel grid framework **101**, a web services gateway **107**, a virtual world server **109**, and enabled applications and services **120**. The channel grid framework **101** may be connected to the web services gateway **107**. The web services gateway **107** may be connected to the channel grid framework

5

101, the virtual world server 109, and enabled applications and services 120. The virtual world server 109 may be connected to the enabled applications and services 120. The enabled applications and services 120 may be connected to the web services gateway 107 and the virtual world server 109.

FIG. 2 illustrates a block diagram of a system 200 for interacting with multiple information forms across multiple types of platforms in accordance with an embodiment of the present invention. The system 200 may include multiple components. As noted above, the various functions of the different components may be combined or segregated as hardware or software. By way of non-limiting example, the components may exist on or as servers or networks of servers, services, or devices. The components may exist in a service-oriented architecture (SOA) that enables each component to exist as a logical component. Similarly, the components may exist on other computers, communication devices, and other computing devices such as desktop computers, laptop computers, mobile telephones, interactive displays, portable digital assistants (PDAs), other network-connected devices, Blu-ray players, in-vehicle devices, televisions, and the like. The system 200 may include a channel grid framework 201, content channels 202, and an application host and transfer tool 203. The application host and transfer tool 203 may include transfer icon #1 mobile device 204, transfer icon #2 television 205, and transfer icon #3 other device type 206. Of course, additional transfer icons may be included as desired. The system 200 may further include a web services gateway 207 and an identity management server 208.

The channel grid framework 201 may be connected to the content channels 202 and the web services gateway 207 through a system bus (not shown) or any suitable network or communication connection. Similarly, the content channels 202 may be connected to the application host and transfer tool 203. The application host and transfer tool 203 may be connected to the transfer icon #1 mobile device 204, the transfer icon #2 television 205, and the transfer icon #3 other device type 206. As noted above, the channel grid framework 201 may be connected to the web services gateway 207. The web services gateway 207 may be connected to the identity management server 208.

The system 200 may further include a virtual world server 209, an enterprise service bus 210, a channel alert server 211, a channel server 212, a video server 213, an enterprise content management server 214, a device integration server 215, and a portal server 216. The system 200 may further include telecommunications network services 217, an Internet multimedia services gateway 218, and multiple databases 219.

The identity management server 208 may be connected to the virtual world server 209, the enterprise service bus 210, the channel alert server 211, the channel server 212, the video server 213, the enterprise content management server 214, the device integration server 215, and the portal server 216. Each of the virtual world server 209, the enterprise service bus 210, the channel alert server 211, the channel server 212, the video server 213, the enterprise content management server 214, the device integration server 215, and the portal server 216 may be connected to one another. The enterprise service bus 210 may be connected to the Internet multimedia services gateway 218, which may be connected to the telecommunications network services 217. The channel alert server 211, the channel server 212, the video server 213, the enterprise content management server 214, the device integration server 215, and the portal server 216 may each be connected to multiple databases 219.

6

In addition to FIG. 2, attention is now directed to FIG. 3, which illustrates a schematic representation of a computer display device 300 displaying the channel grid framework 201 in accordance with an embodiment of the present invention. The channel grid framework 201 may be a hardware device or a software application that displays a twelve channel display layout on a hardware device, such as a computer display device 300. The channel grid framework 201 may be delivered as a web-based browser software application or as a standalone application. Any type of information or content may be assigned to any channel 202. The channel may be displayed on multiple platforms. Although the channel grid framework 201 may display twelve channels 202, the grid may display a larger or smaller number of channels 202. The channel grid framework 201 may include a three-by-four (3×4) matrix of square elements. Although the channel grid framework 201 may include a three-by-four matrix of square elements, different configurations may be substituted. The channel grid framework 201 may also provide development, display, security, integration, and related feature implementation of services delivered through and coupled with the web-services gateway 207, where the actual command structure, business logic, and functions of specific channels 202 may be integrated from subordinate application functions as supported by the virtual world server 209, the enterprise service bus 210, the channel alert server 211, the channel server 212, the video server 213, the enterprise content management server 214, the device integration server 215, the portal server 216, the telecommunications network services 217, the Internet multimedia services gateway 218, and multiple databases 219.

Each of the channels 202 may be representative of any form of information or content. Non-limiting examples include static icons which may activate further functions and full motion multimedia. An unlimited number of direct commands, access to subordinate grids or functions may be assigned to the channel 202 by a developer. A user may access specific channels 202 and interact with them based on the user's profile that has been established and is managed by the identity management server 208. A channel 202 may be developed through the use of services available to the developer. The use of these services may include web services gateway 207, identity management server 208, virtual world server 209, the enterprise service bus 210, the channel alert server 211, the channel server 212, the video server 213, the enterprise content management server 214, the device integration server 215, the portal server 216, and the Internet multimedia services gateway 218. The channel information (e.g., content), enabling alerts, and integration to these services may reside in multiple databases 219.

The application host and transfer tool 203 may be a separate software application that may be installed on a specific hardware device such as a computer, communication device, or other computing device. Non-limiting examples include a server, a network of servers, a desktop computer, a laptop computer, a tablet computer, a net-book computing device, a telephone, a cell phone device, a handheld device, a smart phone, an interactive display, a personal data assistant (PDA), an enterprise digital assistant, a personal navigation device, a network connected device, a Blu-ray player (or other optical disk player with network access), an in-vehicle device, a set-top box (television), a virtual machine, a game console, and the like. The application host and transfer tool 203 may allow for individual channels residing in the desktop channel grid framework 201 to be "dragged and dropped" (by, as a non-limiting example, clicking, holding, moving and releasing) out of the desktop channel grid framework 201 and into

the application host and transfer tool **203**. The dropping of a channel **202** on the application host and transfer tool **203** may trigger a server event that may download a copy of the channel into the application host and transfer tool **203**. Once the channel **202** is installed onto the application host and transfer tool **203**, the channel may then be an independent entity, the desktop channel grid framework **201** can be closed, and the channel(s) **202** residing in the application host and transfer tool **203** can be utilized. Channels **202** residing in the application host and transfer tool **203** can be transferred to other registered devices or platforms (such as from a desktop computer to a mobile telephone) by “dragging and dropping” the channel **202** on top of one of the registered device icons located on, by way of non-limiting example, the application host and transfer tool **203** dock. The drag and drop event may trigger a download of the device specific application to the intended device or platform. Channels **202** residing in the application host and transfer tool **203** may also be “dragged” outside of the application host and transfer tool **203** onto the device “desktop” and be interacted with. All functions and features may remain operable and synchronized across all registered devices or platforms invoked through the transfer command for **204**, **205** and **206** through the web services gateway (**207**) in a manner similar to the channel grid framework’s **201** instantiation. The channel **202** may then appear in the channel grid framework **201** and on the desktop **301**. Functions and features of the channel **202** remain operable and synchronized across all registered platforms invoked through the copy or transfer command through the web services gateway **207** to the channel server **212** and channel alert server **211** to allow full engagement of the functions provided by the channel **202**.

Transfer icon #1 mobile device **204**, transfer icon #2 television **205**, and transfer icon #3 other device type may each be a hardware device or software application. If a selected channel **202** exists in the application host transfer tool **203**, the channel **202** may be moved to a transfer icon through a drag and drop instruction. During a drag and drop function, the channel **202** may be transformed to become available on a selected platform (e.g., a mobile device). During an initial configuration of channels **202**, a user profile may be established which may identify user preferences, platform identities, and service support instructions as to how the user wishes information to behave on the selected platform. The selected platform may need to be electronically connectable such as through the Internet, close over-the-air mechanism (e.g., Bluetooth®), or through a wired connection. When the channel **202** appears on the selected platform, it may retain all of its original native functionality from the channel grid framework **201** if it has been configured or programmed to do so. The application host and transfer tool **203** transfer icons **204**, **205**, **206** may serve as trigger mechanisms, each to activate a channel download to a specific, registered device or platform. The download may be activated by a drag and drop of an application host and transfer tool **203** in which channel **202** application resides onto a transfer icon **204**, **205**, **206**, which, in turn, may send the download request to a remote server application where the appropriate and device or platform specific application may be downloaded to the requesting device or platform.

The web services gateway **207** may be an Internet-based hardware device or software tool through which the channel grid framework **201** may interact with external applications and services. When a user selects a specific channel **202** an instruction from the channel grid framework **201** may pass through the web services gateway **207** to interact with the identity management server **208**. A user may be authenticated

along with the registries to all services, applications, and information that may be involved with that performance of the function of channel **202**. Once authenticated, the request for activity may be processed by one or more of the enterprise service bus **210**, the channel alert server **211**, the channel server **212**, the video server **213**, the enterprise content management server **214**, the device integration server **215**, the portal server **216**, the Internet multimedia services gateway **218**, the virtual world server **209** and the multiple databases **219**. The information or service function to be performed or processed may then be processed back through the identity management server **208** for authorization, then transformed back into the channel characterization as defined in the channel grid framework **201** and displayed as a channel **202**.

The identity management server **208** may be a hardware device or software application that may provide user, application, device, location, equipment and information authentication. When a channel **202** is initially created, the application and its information access and security protocols that are required may be identified. When a user is associated with a channel **202** or specific services that may be enabled by the channel **202**, access and security protocols may be identified for each condition and action to be performed by the user. This information may be stored in a secure and specific database **219**. Every time the channel **202** is invoked or interrogated, both the security of the applications affected as well as the security of the user may be confirmed. Once authorized, the channel **202** services may be performed, and the content provided by the computer application on the channel **202** may be evaluated. The interrogation of the channel **202** may be bi-directional, where the channel **202** may interrogate the identity management server **208** to evaluate content and determine if the channel **202** services are available, and similarly, the identity management server **208** and the web services gateway **207** may be configured to interrogate the channel **202** in the channel grid framework **201** to evaluate content provided by the first computer application.

The virtual world server **209** may be a 3D software application or a device and may be used to provide visualization of information, command actions, or functions, and collaboration among electronically-connected participants. By way of non-limiting example, teleconference attendees may be visualized as floating orbs. Other users on separate platforms may also serve as video conference attendees. Within the virtual world server **209**, an instantaneous visualization of objects in 3D may serve as a method to access information as well as an ability to command actions, or perform functions. These objects may each have associated data or metadata attached. When the user interacts (by way of non-limiting example by touching, clicking, or performing other commands) with an object, the virtual world server **209** may access the data or metadata or a related application as desired by the developer. All interactions with information, command actions, or functions may pass through the identity management server **208** and the web services gateway **207**, and may be displayed in native applications or through a channel **202**.

The enterprise services bus **210** may be a hardware device or software application that may manage multiple information control, application integration, and user enabled instructions. It may be the primary integration utility to all applications, information and communications. When a developer creates a channel’s **202** business logic, associated commands, information transactions, user class entitlements and workflow, they may be stored in databases **219**. The enterprise service bus **210** may call the instructions and information from these databases **219** and enable the command to be serviced and the action requirements to be satisfied.

The channel alert server **211** may be a hardware device or software application that may continually monitor application and information activities defined by a channel. By way of non-limiting example, a user or developer may define threshold conditions with definitive values assigned to events, conditions, logical workflows, discrete information values or signal data. If an established condition is met, the channel alert server **211** may notify the identity management server **208** to confirm the subscriber of the event, determine the active devices of the subscriber, and then pass through the web services gateway **207** and the channel grid framework **201** to provide a visual or auditory alert in the channel **202**. Likewise, the alert may trigger additional actions affecting the channel **202** and the underlying computer application. For example, a channel may be established to monitor an alarm condition of a business or residence. If a condition at the business or residence triggers an alarm, an additional alert action such as notifying a law enforcement agency or a protective services group may be triggered. The alert can appear as defined on other platforms such as a mobile device, a television (set top box), a Blu-ray player, or other devices.

The channel server **212** may be a hardware device or a software application which may define the visual characterization, functions, information, and features of a channel **202**. The channel description and all related information may be stored in databases **219**. All channels may be stored in a channel repository located within the channel server **212**. When a channel **202** is added to the channel grid framework **201** or the application host and transfer tool **203**, software calls or hardware signals may be made to the channel server **212** to request a device specific download action to be performed. The download may occur over, by way of non-limiting example, wired/wireless Internet via TCP-IP, Bluetooth, or local cable via USB cable. This action may route through the enterprise service bus **210** based on logic associated to the channel **202**. Specific actions and information to be displayed may be served or serviced through the identity management server **208**, and on to the target device.

The video server **213** may be a hardware device or software application that may provide application services to transform, transmit, and support the delivery of information in the form of video and audio. The channel server **212**, enterprise content management server **214**, and databases **219** may be accessed by the video server **213** for content.

The enterprise content management server **214** may be a hardware device or a software application that may provide primary configuration, templates, user interface controls and management control over the information displayed on a channel **202**. The originating application data from all applications that are invoked through a channel call may route through the enterprise content management server **214**. All images, charting, icons, artwork and other forms of digital art that make up the user experience may be stored in the enterprise content management server repository **214**. Metadata associated with the request, action, data, user, and time may be managed in an associated database **219**.

The device integration server **215** may be a hardware device or software application that may manage the connection between a channel **202** and any application or information source containing streaming or real-time information from a machine or device. The device integration server **215** may support the interchange of Internet protocol based information commands. A user invoking a channel **202** associated with this information type, and authorized to do so by the identity management server **208**, whether displayed in the virtual world server **209** or directly to the channel **202**, may command a function. By way of non-limiting example, a user

may send a command to an actual physical thermostat in the actual physical world as a display in the virtual world server. The device integration server may store real-time data captured from devices in multiple databases **219** for later retrieval.

The portal server **216** may be a hardware device or software application that may facilitate Internet function access by the web services gateway **207**. This utility may be used to call other Internet-based functions and services by the web services gateway **207**.

The telecommunications network services **217** may provide content distribution and retrieval services for channels **202** through telecommunication wireline and wireless services.

The enterprise service bus **210** may send all data traffic requests to applications, services and systems.

The Internet multi-media services gateway **218** may serve as the specific implementation of network traffic protocols, applications and services to specific telecommunications providers.

The databases **219** may exist to manage commands, applications, information, and user profiles.

The operation of the system **200** for interacting with multiple information and data forms across multiple types of computers, interactive displays, communication devices, and computing devices is now described with reference to FIGS. **4** and **5**.

FIG. **4** is a flowchart of an exemplary method **400** of interacting with a channel. In operation **402**, the method **400** may begin. In operation **404**, a user may be authenticated. The user may initiate the channel grid framework **201**, and provide authentication data. The authentication data may pass through the web services gateway **207** to the identity management server **208** for authentication.

After authenticating the user in operation **404**, the channel grid framework **201** may be established for the user on a first platform or device in operation **406**. The channel grid framework **201** may display twelve channels **202**. A channel **202** may be representative of any form of information or content. As a non-limiting example, the channel **202** may represent a temperature in a specific building as measured by a thermostat sensor. In displaying the channel **202**, the channel **202** may be authenticated by the identity management server **208**.

In operation **408**, the user may determine whether to transfer the channel **202** from the first platform or device to a second platform or device. If the user determines to transfer the channel **202** from the first platform or device to the second platform or device, operation **418** may be performed and the channel **202** may be deployed from the first platform or device to the second platform or device by selecting the channel **202** and dragging that channel **202** from the channel grid framework **201**. The selection and dragging of the channel **202** may be according to the method shown in FIG. **5** and discussed below. The method **400** may return to operation **408**. If in operation **408** the user does not determine to transfer the channel **202**, the method **400** may proceed to operation **410**.

In operation **410**, the user may determine whether to interact with a 3D digital instance of a physical object in a 3D workspace to access information related to the physical object. If the user determines to interact with the 3D digital instance of the physical object in the 3D workspace, operation **420** may be performed. The user may be presented with the 3D workspace using the virtual world server **209**. In the 3D workspace, the 3D digital instance of the physical object may appear. The user may select or otherwise interact with the 3D digital instance of the physical object to access information

11

related to the physical object. Further to the non-limiting example where the channel **202** may represent the temperature in the specific building as measured by the thermostat sensor, the user may select or otherwise interact with a 3D digital instance of the thermostat. As a non-limiting example, the user may obtain a service history of the thermostat.

In the 3D workspace, the underlying functionalities of a channel **202** (identity, web services, enterprises services bus, databases) may be accessed in the same way as they would be using a channel **202** interface on the channel grid framework **201**. By way of non-limiting example, when a user selects a specific channel **202**, an instruction from the channel grid framework **201** may pass through the web services gateway **207** to interact with the identity management server **208**. The user may be authenticated along with the registries to all services, applications, and information that may be involved with that performance of the function of channel **202**. Once authenticated, the request for activity may be processed by one or more of the enterprise service bus **210**, the channel alert server **211**, the channel server **212**, the video server **213**, the enterprise content management server **214**, the device integration server **215**, the portal server **216**, the Internet multimedia services gateway **218**, the virtual world server **209**, and the multiple databases **219**. The information or service function to be performed or processed may then be processed back through the identity management server **208** for authorization, then transformed back into the channel characterization as defined in the channel grid framework **201** and displayed as the channel **202**. Similarly, from the 3D workspace, the operations may occur.

The method may return to operation **408**. If in operation **410** the user does not determine to interact with the 3D digital instance of the physical object, the method **400** may proceed to operation **412**.

In operation **412**, the user may determine whether to interact with a 3D avatar (an electronic representation of a human or other) of a second user in a 3D workspace to be displayed on both the user's platform or device and the second user's platform or device. If the user determines to interact with the 3D avatar of the second user in the 3D workspace, operation **422** may be performed. The user may be presented with the 3D workspace using the virtual world server **209**. The second user may also be presented with the 3D workspace using the virtual world server **209**. The first and second users may be on different platforms or devices. In the 3D workspace, the user may be represented by a 3D avatar of the user. The second user may be represented by the 3D avatar of the second user. The 3D avatars of the user and the second user may interact in the 3D workspace. The method may return to operation **408**. If, in operation **412**, the user does not determine to interact with the 3D avatar of the second user in the 3D workspace, the method may proceed to operation **414**.

In operation **414**, the user may determine whether to interact with a 3D digital instance of a physical object in a 3D workspace to implement a change in the 3D digital instance to implement a corresponding physical change in the physical object. If the user determines to interact with the 3D digital instance of the physical object in the 3D workspace, operation **424** may be performed. The user may be presented with the 3D workspace using the virtual world server **209**. In the 3D workspace, a 3D digital instance of a physical object may appear. The user may implement a change in the 3D digital instance of the physical object to implement a corresponding physical change in the physical object. Further to the non-limiting example where channel **202** may represent the temperature in the specific building as measured by a thermostat sensor, the user may increase the desired temperature in the

12

3D digital instance of the physical thermostat. Accordingly, the physical thermostat's setting may experience a corresponding increase in the desired temperature. The method may return to operation **408**. If in operation **414** the user does not determine to interact with the 3D digital instance of the physical object in the 3D workspace, the method **400** may proceed to operation **416**.

In operation **416**, the user may determine whether to end the current session. If the user determines not to end the current session, the method **400** may return to operation **408**. If the user does determine to end the current session, the method **400** may proceed to operation **426** and ends.

It should be noted that although FIG. 4 shows determinations occurring at particular points during the method, the determinations, like other operations, may be made at different points during the method, and differently relative to one another.

FIG. 5 is a flowchart of an exemplary method **500** of transferring a channel from a first platform or device to a second platform or device. In operation **502**, the method **500** may begin.

In operation **503**, a user may be authenticated. In operation **504**, a channel grid framework **201** for the user may be established on a first platform or device. The channel grid framework **201** may provide access to a first computer application displayed on a display device as a channel **202**. The channel **202** may be displayed on the first platform or device in a channel grid framework **201**. As noted above, the channel server **212** may define the visual characterization, functions, information, and features of the channel **202**. The channel description and all related information may be stored in databases **219**. All channels may be stored in a channel repository located within the channel server **212**. When the channel **201** is added to the channel grid framework **201**, software calls or hardware signals may be made to the channel server **212** to request a device specific download action to be performed. This action may route through the enterprise service bus **210** based on logic associated to the channel **202**. Specific actions and information to be displayed may be served or serviced through the identity management service **208**, and on the target device.

In operation **506**, the channel **202** may be deployed from the channel grid framework **201** on the first platform or device to a second platform or device in response to the user selecting the channel from the channel grid framework **201** on the first platform or device and performing a copy operation of the channel **202** to the second platform or device. The selecting may include a dragging of the channel **202** out of the channel grid framework **201** and onto the application host and transfer tool **203** where the channel **202** may then be directed to a registered computing device. The channel grid framework **201** may be a browser-based software application or a stand-alone software application. The first platform or device may be running, and the channel grid framework **201** may be compatible with JavaFX™, Microsoft Silverlight™, Adobe Flex™, and similar proprietary and open source rich Internet application software frameworks, for example. The selection of the channel **202** may include using a rich Internet application or a similar class of software tools delivered via a browser or via a sandbox or virtual machine. For example, JavaFX™, Microsoft Silverlight™, Adobe Flex™, and similar proprietary and open source software tools may be used to provide additional functionality of the application host and transfer tool **203** to enable dragging of the channel **202** from the channel grid framework **201** to an icon **204**, **205**, or **206** on the desktop **301** of the first platform or device. The icon **204**, **205**, or **206** may represent the second platform or device. While the

13

rich Internet applications, such as JavaFX™, Microsoft Silverlight™, Adobe Flex™, and similar proprietary and open source software tools may be used to provide dragging functionality within the channel grid framework 201, the additional functionality of the application host and transfer tool 203 may provide the dragging functionality independent of the channel grid framework 202. Similarly to operation 504, when the channel 201 is added to the application host and transfer tool 203, software calls or hardware signals may be made to the channel server 212 to request a device specific download action to be performed.

In operation 508, a runtime application of the channel 201 may be established on the second platform or device. This may result in the channel 201 being displayed and becoming operational on the second platform or computing device. In operation 510, the method 500 ends.

The foregoing description discloses only exemplary embodiments of the invention. Modifications of the above-disclosed embodiments of the present invention of which fall within the scope of the invention will be readily apparent to those of ordinary skill in the art. By way of non-limiting example, although many items are shown as software applications (e.g., the channel grid framework 201), one or more of these items may also be embodied as hardware, or as a combination of software and hardware. Further, although one or more components are disclosed as existing in a SOA architecture, one or more components may exist as separate components, and may be merged or separated differently.

The devices and subsystems of the exemplary embodiments of FIGS. 1-5 are for exemplary purposes, as many variations of the specific hardware used to implement the exemplary embodiments are possible, as will be appreciated by those skilled in the relevant arts. By way of non-limiting example, the functionality of one or more of the devices and subsystems of the exemplary embodiments of FIGS. 1-5 can be implemented via one or more programmed computer systems or devices, including server computers, client computers, and the like.

To implement such variations as well as other variations, a single computer system can be programmed to perform the special purpose functions of one or more of the devices and subsystems of the exemplary embodiments of FIGS. 1-5. On the other hand, two or more programmed computer systems or devices can be substituted for any one of the devices and subsystems of the exemplary embodiments of FIGS. 1-5. Accordingly, principles and advantages of distributed processing, such as redundancy, replication, and the like, also can be implemented, as desired, to increase the robustness and performance of the devices and subsystems of the exemplary embodiments of FIGS. 1-5.

The devices and subsystems of the exemplary embodiments of FIGS. 1-5 can store information relating to various processes described herein. This information can be stored in one or more memories, such as a hard disk, optical disk, magneto-optical disk, RAM, and the like, of the devices and subsystems of the exemplary embodiments of FIGS. 1-5. One or more databases of the devices and subsystems of the exemplary embodiments of FIGS. 1-5 can store the information used to implement the exemplary embodiments of the present invention. The databases can be organized using data structures (e.g., records, tables, arrays, fields, graphs, trees, lists, and the like) included in one or more memories or storage devices listed herein. The processes described with respect to the exemplary embodiments of FIGS. 1-5 can include appropriate data structures for storing data collected and/or gener-

14

ated by the processes of the devices and subsystems of the exemplary embodiments of FIGS. 1-5 in one or more databases thereof.

All or a portion of the devices and subsystems of the exemplary embodiments of FIGS. 1-5 can be conveniently implemented using one or more general purpose computer systems, microprocessors, digital signal processors, microcontrollers, and the like, programmed according to the teachings of the exemplary embodiments of the present invention, as will be appreciated by those skilled in the computer and software arts. Appropriate software can be readily prepared by programmers of ordinary skill based on the teachings of the exemplary embodiments, as will be appreciated by those skilled in the software art. Further, the devices and subsystems of the exemplary embodiments of FIGS. 1-5 can be implemented on the World Wide Web. In addition, the devices and subsystems of the exemplary embodiments of FIGS. 1-5 can be implemented by the preparation of application-specific integrated circuits or by interconnecting an appropriate network of conventional component circuits, as will be appreciated by those skilled in the electrical arts. Thus, the exemplary embodiments are not limited to any specific combination of hardware circuitry and/or software.

As stated above, the devices and subsystems of the exemplary embodiments of FIGS. 1-5 can include computer readable storage media or memories for holding instructions programmed according to the teachings of the present invention and for holding data structures, tables, records, and/or other data described herein. Computer readable storage media can include any suitable medium that participates in providing instructions to a processor for execution. Such a medium can take many forms, including but not limited to, non-volatile media, volatile media, transmission media, and the like. Non-volatile media can include, by way of non-limiting example, optical or magnetic disks, magneto-optical disks, and the like. Volatile media can include dynamic memories, and the like. Transmission media can include coaxial cables, copper wire, fiber optics, and the like. Transmission media also can take the form of acoustic, optical, electromagnetic waves, and the like, such as those generated during radio frequency (RF) communications, infrared (IR) data communications, and the like. Common forms of computer-readable storage media can include, by way of non-limiting example, a floppy disk, a flexible disk, hard disk, magnetic tape, any other suitable magnetic medium, a CD-ROM, CDRW, DVD, any other suitable optical medium, punch cards, paper tape, optical mark sheets, any other suitable physical medium with patterns of holes or other optically recognizable indicia, a RAM, a PROM, an EPROM, a FLASH-EPROM, any other suitable memory chip or cartridge, a carrier wave, or any other suitable medium from which a computer can read.

Although embodiments of the present invention have been shown and described, the present invention is not so limited, but rather covers various modifications and equivalent arrangements, which fall within the purview of the claims and their equivalents.

What is claimed is:

1. A non-transitory computer-readable storage media for interacting with multiple information forms across computing devices, the computer-readable storage media including computer-readable instructions configured to cause one or more computer processors to execute the operations comprising:

authenticating a user and a first platform associated with the user;
establishing a channel grid framework for the user on the first platform, the channel grid framework including a

15

matrix of elements, wherein each element represents a secure user-centric channel providing access to a first computer application, wherein the secure user-centric channel is displayed on a display device of the first platform; and

deploying the secure user-centric channel from the channel grid framework on the first platform to a second platform associated with the user in response to a user selecting the secure user-centric channel from the channel grid framework on the first platform and performing a copy operation of the secure user-centric channel to the second platform, wherein deploying the secure user-centric channel comprises:

A) establishing a user profile identifying user preferences, platform identities, and service support instructions that determine how the secure user-centric channel behaves on at least the second platform; B) identifying the second platform to which the channel is to be deployed;

C) authenticating the second platform to receive the secure user-centric channel based at least in part on a second platform identity for the second platform; and

D) if the user, the first platform, and the second platform are authenticated, transmitting to the second platform data used to deploy the secure user-centric channel, wherein the transmitted data is configured to provide access to the first computer application on the second platform, and wherein the transmitted data is configured to cause services that are enabled by the secure user-centric channel on the second platform to be based at least in part on information access rights and/or security protocols respectively associated with the secure user-centric channel, the user, and the second platform, wherein the user selecting the channel from the channel grid framework on the first platform and performing the copy operation of the channel to the second platform includes performing a drag and drop operation, wherein said drag and drop operation causes the channel to be deployed on the second platform based at least in part on the user profile, and wherein at least a portion of the data transmitted to the second platform is based at least in part on the user profile.

2. The computer-readable storage media of claim 1, wherein the user selecting the channel from the channel grid framework on the first platform and performing the copy operation of the channel to the second platform includes performing a drag and drop operation.

3. The computer-readable storage media of claim 1, wherein the channel is a computer application capable of at least one of launching other computer applications, receiving data regarding other computer applications, displaying streaming data, or polling external computer applications.

4. The computer-readable storage media of claim 1, wherein the channel grid framework provides access to twelve channels conveying information.

5. The computer-readable storage media of claim 1, wherein the first and second platforms comprise different members from a group consisting of a server, a network of servers, a desktop computer, a laptop computer, a tablet computer, a netbook computing device, a personal digital assistant (PDA), a telephone, a cell phone device, a handheld device, a smart phone, an interactive display, a portable digital assistant (PDA), an enterprise digital assistant, a personal navigation device, a network connected device, an optical disk player, an in-vehicle device, a set-top television box, a virtual machine, and a game console.

16

6. The computer-readable storage media of claim 1, wherein deploying the channel from the channel grid framework includes:

displaying an icon on the first platform, the icon instantiating a representation of the second platform; and

identifying the selected channel from the channel grid framework on the first platform and displaying a representation of the selected channel; and

receiving data representing a user dragging the representation of the selected channel out of the channel grid framework on the first platform to the icon representing the second platform.

7. The computer-readable storage media of claim 1, wherein the first computer application displayed on the display device as a channel includes at least one of a streaming video application, an audio application, a voice-over-IP application, an environmental monitoring application, a financial services application, an enterprise resource planning application, a building information modeling application, a product lifecycle management application, a project management application, an immersive three dimensional environment application, a video conferencing application, an RSS reader application, a channel application repository application, an end-user preferences and localization application, a word processing application, a spreadsheet application, a presentation-slide show application, an email application, an address book application, an instant messaging application, an enterprise content management application, a text application, a graphics application, a picture application, a video application, a remote control-interaction application, and a three-dimensional graphic visualization of objects application.

8. The computer-readable storage media of claim 1 further comprising computer-readable instructions configured to cause one or more computer processors to execute the operations comprising:

interrogating the channel in the channel grid framework on the display device to evaluate content provided by the first computer application.

9. The computer-readable storage media of claim 8 further comprising computer-readable instructions configured to cause one or more computer processors to execute the operations comprising:

configuring the channel grid framework to provide an intelligent alert object;

comparing the evaluated content provided by the first computer application to a predetermined intelligent alert threshold condition; and

displaying an alert condition on the first and second platforms when the evaluated content meets the predetermined threshold condition.

10. The computer-readable storage media of claim 8 further comprising computer-readable instructions configured to cause one or more computer processors to execute the operations comprising:

selecting an object from the first computer application displayed on the display device as a three-dimensional workspace; and

interacting spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace.

11. The computer-readable storage media of claim 8 further comprising computer-readable instructions configured to cause one or more computer processors to execute the operations comprising:

17

selecting an object displayed by the first computer application in a three-dimensional workspace, the selected object in the three-dimensional workspace corresponding to a physical device in a physical space;

interacting spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace; and

implementing a virtual change in the digital instance of the selected object using the second computer application to implement a corresponding physical change in the physical device.

12. The computer-readable storage media of claim 11, wherein interacting spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace includes interacting with a 3D avatar of a second user in a 3D workspace to be displayed on both the user's platform and the second user's platform.

13. A computer-implemented method for interacting with multiple information forms across computing devices, the computer-implemented method comprising:

authenticating a user and a first computing device platform associated with the user;

establishing a channel grid framework for the user on the first computing device platform, the channel grid framework including a matrix of elements, wherein each element represents a secure user-centric channel providing access to a first computer application, wherein the secure user-centric channel is displayed on a display device of the first computing device platform; and

deploying the secure user-centric channel from the channel grid framework on the first computing device platform to a second computing device platform associated with the user in response to a user selecting the channel from the channel grid framework on the first computing device platform and performing a copy operation of the channel to the second computing device platform, wherein deploying the channel comprises:

A) establishing a user profile identifying user preferences, platform identities, and service support instructions that determine how the secure user-centric channel behaves on at least the second computing device platform;

B) identifying the second computing device platform to which the channel is to be deployed;

C) authenticating the second computing device platform to receive the secure user-centric channel based at least in part on a second computing device platform identity for the second computing device platform; and

D) if the user, the first computing device platform, and the second computing device platform are authenticated, transmitting to the second computing device platform data used to deploy the secure user-centric channel,

wherein the transmitted data is configured to provide access to the first computer application on the second computing device platform, and wherein the transmitted data is configured to cause services that are enabled by the secure user-centric channel on the second computing device platform to be based at least in part on information access rights and/or security protocols respectively associated with the secure user-centric channel, the user, and the second computing device platform, wherein the

18

user selecting the channel from the channel grid framework on the first computing device platform and performing the copy operation of the channel to the second computing device platform includes performing a drag and drop operation, wherein said drag and drop operation causes the channel to be deployed on the second computing device platform based at least in part on the user profile, and wherein at least a portion of the data transmitted to the second computing device platform is based at least in part on the user profile.

14. The computer-implemented method of claim 13, wherein the user selecting the channel from the channel grid framework on the first computing device platform and performing the copy operation of the channel to the second computing device platform includes performing a drag and drop operation.

15. The computer-implemented method of claim 13, wherein the channel is a computer application capable of at least one of launching other computer applications, receiving data regarding other computer applications, displaying streaming data, or polling external computer applications.

16. The computer-implemented method of claim 13, wherein the channel grid framework provides access to twelve channels conveying information.

17. The computer-implemented method of claim 13, wherein the first and second computer device platforms comprise different members from a group consisting of a server, a network of servers, a desktop computer, a laptop computer, a tablet computer, a netbook computing device, a personal digital assistant (PDA), a telephone, a cell phone device, a handheld device, a smart phone, an interactive display, a portable digital assistant (PDA), an enterprise digital assistant, a personal navigation device, a network connected device, an optical disk player, an in-vehicle device, a set-top television box, a virtual machine, and a game console.

18. The computer-implemented method of claim 13, wherein deploying the channel from the channel grid framework includes:

displaying an icon on the first computing device platform, the icon instantiating a representation of the second computing device platform; and

identifying the selected channel from the channel grid framework on the first computing device platform and displaying a representation of the selected channel; and receiving data representing a user dragging the representation of the selected channel out of the channel grid framework on the first computing device platform to the icon representing the second computing device platform.

19. The computer-implemented method of claim 13, wherein the first computer application displayed on the display device as a channel includes at least one of a streaming video application, an audio application, a voice-over-IP application, an environmental monitoring application, a financial services application, an enterprise resource planning application, a building information modeling application, a product lifecycle management application, a project management application, an immersive three dimensional environment application, a video conferencing application, an RSS reader application, a channel application repository application, an end-user preferences and localization application, a word processing application, a spreadsheet application, a presentation-slide show application, an email application, an address book application, an instant messaging application, an enterprise content management application, a text application, a graphics application, a picture application,

19

a video application, a remote control-interaction application, and a three-dimensional graphic visualization of objects application.

20. The computer-implemented method of claim **13** further comprising:

interrogating the channel in the channel grid framework on the display device to evaluate content provided by the first computer application.

21. The computer-implemented method of claim **20** further comprising:

configuring the channel grid framework to provide an intelligent alert object;

comparing the evaluated content provided by the first computer application to a predetermined intelligent alert threshold condition; and

displaying an alert condition on the first and second computing device platforms when the evaluated content meets the predetermined threshold condition.

22. The computer-implemented method of claim **20** further comprising:

selecting an object from the first computer application displayed on the display device as a three-dimensional workspace; and

interacting spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace.

23. The computer-implemented method of claim **20** further comprising:

selecting an object displayed by the first computer application in a three-dimensional workspace, the selected object in the three-dimensional workspace corresponding to a physical device in a physical space;

interacting spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace; and

implementing a virtual change in the digital instance of the selected object using the second computer application to implement a corresponding physical change in the physical device.

24. The computer-implemented method of claim **23**, wherein interacting spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace includes interacting with a 3D avatar of a second user in a 3D workspace to be displayed on the user's computing device platform and on the second user's computing device platform.

25. A system for interacting with multiple information forms across computing devices, the system comprising:

at least one processor;

an identity management server configured to authenticate a user;

a channel grid framework established for the user on a first computing device platform associated with the user, the channel grid framework including a matrix of elements, wherein each element represents a secure user-centric channel providing access to a first computer application, wherein the secure user-centric channel is displayed on a display device of the first computing device platform; and

an application host and transfer tool configured to deploy the secure user-centric channel from the channel grid

20

framework on the first computing device platform to a second computing device platform associated with the user in response to a user selecting the channel from the channel grid framework on the first computing device platform and performing a copy operation of the channel to the second computing device platform,

wherein the application host and transfer tool is configured to establish a user profile identifying user preferences, platform identities, and service support instructions that determine how the secure user-centric channel behaves on at least the second computing device platform;

wherein the application host and transfer tool is configured to identify the second computing device platform to which the secure user-centric channel is to be deployed; wherein the identity management server is configured to authenticate the second computing device platform to receive the secure user-centric channel based at least in part on a second computing device platform identity for the second computing device platform; and

wherein, if the user, the first computing device platform, and the second computing device platform are authenticated, the application host and transfer tool is configured to transmit to the second computing device platform data used to deploy the secure user-centric channel, wherein the transmitted data is configured to provide access to the first computer application on the second computing device platform, and wherein the transmitted data is configured to cause services that are enabled by the secure user-centric channel on the second platform to be based at least in part on information access rights and/or security protocols respectively associated with the secure user-centric channel, the user, and the second platform, wherein the user selecting the channel from the channel grid framework on the first computing device platform and performing the copy operation of the channel to the second computing device platform includes performing a drag and drop operation, wherein said drag and drop operation causes the channel to be deployed on the second computing device platform based at least in part on the user profile, and wherein at least a portion of the data transmitted to the second computing device platform is based at least in part on the user profile.

26. The system of claim **25**, wherein the application host and transfer tool is further configured to receive a copy of the channel in response to the copy operation, including the user selecting the channel from the channel grid framework on the first computing device platform and performing a drag and drop copy operation of the channel to the second computing device.

27. The system of claim **25** further comprising:

a Web services gateway configured to integrate subordinate application functions in the channel, the subordinate applications functions including at least one of launching other computer applications, receiving data regarding other computer applications, displaying streaming data, or polling external computer applications.

28. The system of claim **25**, wherein the channel grid framework provides access to twelve channels conveying information.

29. The system of claim **25**, wherein the first and second computer device platforms comprise different members from a group consisting of a server, a network of servers, a desktop computer, a laptop computer, a tablet computer, a netbook computing device, a personal digital assistant (PDA), a telephone, a cell phone device, a handheld device, a smart phone, an interactive display, a portable digital assistant (PDA), an enterprise digital assistant, a personal navigation device, a

21

network connected device, an optical disk player, an in-vehicle device, a set-top television box, a virtual machine, and a game console.

30. The system of claim 25, wherein the application host and transfer tool is further configured to:

display an icon on the first computing device platform, the icon instantiating a representation of the second computing device platform;

identify the selected channel from the channel grid framework on the first computing device platform and display a representation of the selected channel; and

receive data representing a user dragging the representation of the selected channel out of the channel grid framework on the first computing device platform to the icon representing the second computing device platform.

31. The system of claim 25, wherein the first computer application displayed on the display device as a channel includes at least one of a streaming video application, an audio application, a voice-over-IP application, an environmental monitoring application, a financial services application, an enterprise resource planning application, a building information modeling application, a product lifecycle management application, a project management application, an immersive three dimensional environment application, a video conferencing application, an RSS reader application, a channel application repository application, an end-user preferences and localization application, a word processing application, a spreadsheet application, a presentation-slide show application, an email application, an address book application, an instant messaging application, an enterprise content management application, a text application, a graphics application, a picture application, a video application, a remote control interaction application, and a three-dimensional graphic visualization of objects application.

32. The system of claim 27, wherein the identity management server and the web services gateway are further configured to interrogate the channel in the channel grid framework on the display device to evaluate content provided by the first computer application.

33. The system of claim 32 further comprising:

a channel server configured to provide the first computer application displayed on the display device as the channel;

22

a channel alert server configured to provide an intelligent alert object to the channel grid framework and further configured to compare the evaluated content provided by the first computer application to a predetermined intelligent alert threshold condition and display an alert condition on the first and second computing device platforms when the evaluated content meets the predetermined threshold condition.

34. The system of claim 32 further comprising:

a virtual world server configured to select an object from the first computer application displayed on the display device as a three-dimensional workspace and interact spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace.

35. The system of claim 32, wherein the virtual world server is further configured to:

select an object displayed by the first computer application in a three-dimensional workspace, the selected object in the three-dimensional workspace corresponding to a physical device in a physical space;

interact spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace; and

implement a virtual change in the digital instance of the selected object using the second computer application to implement a corresponding physical change in the physical device.

36. The system of claim 35, wherein interacting spatially with a digital instance of the selected object in the three-dimensional workspace to access a second computer application providing additional content related to the selected object displayed in the three-dimensional workspace includes interacting with a 3D avatar of a second user in a 3D workspace to be displayed on the user's computing device platform and on the second user's computing device platform.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,499,250 B2
APPLICATION NO. : 12/465331
DATED : July 30, 2013
INVENTOR(S) : Wetzer et al.

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page:

The first or sole Notice should read --

Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 652 days.

Signed and Sealed this
Twenty-third Day of May, 2017



Michelle K. Lee
Director of the United States Patent and Trademark Office