



US007457503B2

(12) **United States Patent**
Solheid et al.

(10) **Patent No.:** **US 7,457,503 B2**
(45) **Date of Patent:** **Nov. 25, 2008**

(54) **TELECOMMUNICATIONS CONNECTION
CABINET**

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,736,100 A 4/1988 Vastagh

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 743 701 A2 11/1996

(Continued)

OTHER PUBLICATIONS

Drawings showing an ADC fiber storage trough concept including presentation entitled "Fujitsu Fiber Management Project Fiber Trough Concept", 11 pages (Jun. 2002).

(Continued)

Primary Examiner—Javaid Nasri

(74) *Attorney, Agent, or Firm*—Merchant & Gould P.C.

(57) **ABSTRACT**

A telecommunications cabinet comprising a top, a floor, a pair of opposing sides, a front wall and a rear wall defining an interior, the front including an access door for accessing the interior. Within the interior are mounted a cable management structure, an adapter panel with an adapter configured to optical connector two optical fiber cables terminated with fiber optic connectors, and a fiber optic connector holder mounted in openings of the adapter panel. The connector holder has an opening configured to receive a fiber optic connector with a dust cap, the opening accessible from a front side of the adapter panel. A fiber optic connector including a ferrule with a polished end face holding an end of an optical fiber with a dust cap placed about the ferrule and polished end face is inserted within the opening of a fiber optic connector holder. And a fiber optic connector is inserted within the rear side of one of the adapters.

41 Claims, 16 Drawing Sheets

(75) Inventors: **James J. Solheid**, Lakeville, MN (US); **Daniel Ray Mertesdorf**, Duluth, MN (US); **Matthew J. Holmberg**, Le Center, MN (US); **Trevor D. Smith**, Eden Prairie, MN (US); **Joel B. Douglas**, Hutchinson, MN (US); **Kathleen M. Barnes**, Golden Valley, MN (US); **Marlon E. Holmquist**, Gibbon, MN (US); **Thomas C. Tinucci**, Chaska, MN (US); **Cindy S. Walters**, Prior Lake, MN (US); **James W. Conroy**, Prior Lake, MN (US)

(73) Assignee: **ADC Telecommunications, Inc.**, Eden Prairie, MN (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 2 days.

(21) Appl. No.: **11/729,310**

(22) Filed: **Mar. 27, 2007**

(65) **Prior Publication Data**

US 2008/0075411 A1 Mar. 27, 2008

Related U.S. Application Data


(63) Continuation of application No. 10/613,764, filed on Jul. 2, 2003, now Pat. No. 7,233,731.

(51) **Int. Cl.**
G02B 6/00 (2006.01)

(52) **U.S. Cl.** **385/135**

(58) **Field of Classification Search** 385/134–137,
385/70, 72, 53, 75

See application file for complete search history.

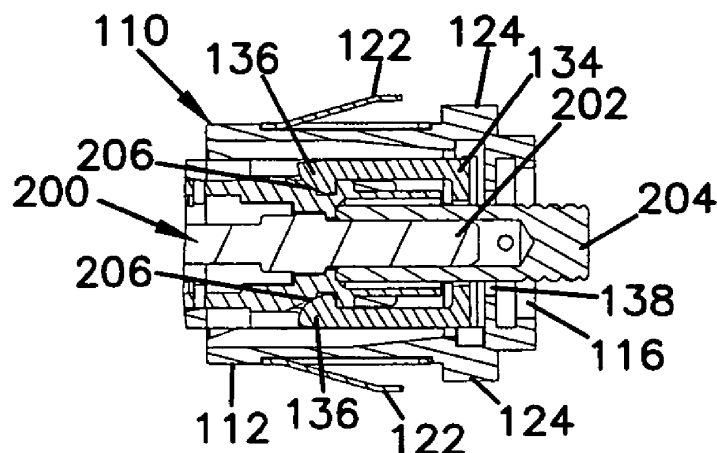

US 7,457,503 B2

Page 2

U.S. PATENT DOCUMENTS

4,747,020 A 5/1988 Brickley et al.
4,792,203 A 12/1988 Nelson et al.
4,824,196 A 4/1989 Bylander
4,861,134 A 8/1989 Alameel et al.
4,900,123 A 2/1990 Barlow et al.
4,948,220 A 8/1990 Violo et al.
4,995,688 A 2/1991 Anton et al.
5,023,646 A 6/1991 Ishida et al.
5,073,042 A 12/1991 Mulholland et al.
5,076,688 A 12/1991 Bowen et al.
5,142,598 A 8/1992 Tabone
5,214,735 A 5/1993 Henneberger et al.
5,233,674 A 8/1993 Vladic
5,274,729 A 12/1993 King et al.
5,274,731 A 12/1993 White
5,317,663 A 5/1994 Beard et al.
5,333,221 A 7/1994 Briggs et al.
5,333,222 A 7/1994 Belenkiy et al.
5,359,688 A 10/1994 Underwood
5,363,465 A 11/1994 Korkowski et al.
5,367,598 A 11/1994 Devenish, III et al.
5,402,515 A 3/1995 Vidacovich et al.
5,408,557 A 4/1995 Hsu
RE34,955 E 5/1995 Anton et al.
5,420,958 A 5/1995 Henson et al.
5,442,726 A 8/1995 Howard et al.
5,448,015 A 9/1995 Jamet et al.
5,469,526 A 11/1995 Rawlings
5,497,444 A 3/1996 Wheeler
5,506,922 A 4/1996 Grois et al.
5,511,144 A 4/1996 Hawkins et al.
5,542,015 A 7/1996 Hultermans
5,647,043 A 7/1997 Anderson et al.
5,708,751 A 1/1998 Mattei
5,734,776 A 3/1998 Puetz
5,764,844 A 6/1998 Mendes
5,774,612 A 6/1998 Belenkiy et al.
5,778,132 A 7/1998 Csipkes et al.
5,823,646 A 10/1998 Arizpe et al.
5,825,955 A 10/1998 Ernst et al.
5,883,995 A 3/1999 Lu
5,909,526 A 6/1999 Roth et al.
5,930,425 A 7/1999 Abel et al.
5,945,633 A 8/1999 Ott et al.
5,956,444 A 9/1999 Duda et al.
5,969,294 A 10/1999 Eberle et al.
5,975,769 A 11/1999 Larson et al.
6,027,252 A 2/2000 Erdman et al.
6,041,155 A 3/2000 Anderson et al.
6,044,193 A 3/2000 Szentesi et al.
6,061,492 A 5/2000 Strause et al.
6,069,797 A 5/2000 Widmayer et al.
6,079,881 A 6/2000 Roth
6,096,797 A 8/2000 Prantl et al.
6,149,315 A 11/2000 Stephenson
6,160,946 A 12/2000 Thompson et al.
6,188,687 B1 2/2001 Mussman et al.
6,188,825 B1 2/2001 Bandy et al.
6,208,796 B1 3/2001 Williams Vigliaturo
6,227,717 B1 5/2001 Ott et al.
6,234,683 B1 5/2001 Waldron et al.
6,236,795 B1 5/2001 Rodgers
6,240,229 B1 5/2001 Roth
6,247,849 B1 6/2001 Liu
6,259,850 B1 7/2001 Crosby, Jr. et al.
6,271,484 B1 8/2001 Tokutsu
6,278,829 B1 8/2001 BuAbbud et al.
RE37,489 E 1/2002 Anton et al.
6,347,888 B1 2/2002 Puetz
6,356,697 B1 3/2002 Braga et al.
6,363,200 B1 3/2002 Thompson et al.

6,385,381 B1 5/2002 Janus et al.
6,411,767 B1 6/2002 Burrous et al.
6,418,262 B1 7/2002 Puetz et al.
6,424,781 B1 7/2002 Puetz et al.
6,425,694 B1 7/2002 Szilagyi et al.
6,431,762 B1 8/2002 Taira et al.
6,434,313 B1 8/2002 Clapp, Jr. et al.
6,452,925 B1 9/2002 Sistanizadeh et al.
6,453,033 B1 9/2002 Little et al.
6,464,402 B1 10/2002 Andrews et al.
D466,087 S 11/2002 Cuny et al.
6,480,487 B1 11/2002 Wegleirner et al.
6,483,977 B2 11/2002 Battey et al.
6,496,640 B1 12/2002 Harvey et al.
6,539,147 B1 3/2003 Mahony
6,539,160 B2 3/2003 Battey et al.
6,542,688 B1 4/2003 Battey et al.
6,554,485 B1 4/2003 Beatty et al.
6,556,763 B1 4/2003 Puetz et al.
6,577,595 B1 6/2003 Counterman
6,597,670 B1 7/2003 Tweedy et al.
6,614,980 B1 9/2003 Mahony
6,621,975 B2 9/2003 Laporte et al.
6,623,170 B2 9/2003 Petrillo
6,625,375 B1 9/2003 Mahony
6,631,237 B2 10/2003 Knudsen et al.
6,654,536 B2 11/2003 Battey et al.
6,661,961 B1 12/2003 Allen et al.
6,668,127 B1 12/2003 Mahony
6,678,457 B2 1/2004 Kim et al.
6,760,531 B1 7/2004 Solheid et al.
6,768,860 B2 7/2004 Liberty
6,778,752 B2 8/2004 Laporte et al.
6,788,786 B1 9/2004 Kessler et al.
6,792,191 B1 9/2004 Clapp, Jr. et al.
6,815,612 B2 11/2004 Bloodworth et al.
6,850,685 B2 2/2005 Tinucci et al.
6,853,795 B2 2/2005 Dagley et al.
6,870,734 B2 3/2005 Mertesdorf et al.
6,901,200 B2 5/2005 Schray
6,909,833 B2 6/2005 Henschel et al.
6,925,241 B2 8/2005 Bohle et al.
6,950,593 B2 9/2005 Hodge et al.
6,983,095 B2 1/2006 Reagan et al.
7,029,322 B2 4/2006 Ernst et al.
7,198,409 B2 4/2007 Smith et al.
7,200,317 B2 4/2007 Reagan et al.
7,218,827 B2 5/2007 Vongseng et al.
7,233,731 B2 6/2007 Solheid et al.
7,277,620 B2 10/2007 Vongseng et al.
2001/0001270 A1 5/2001 Williams Vigliaturo
2002/0034290 A1 3/2002 Pershan
2002/0176681 A1 11/2002 Puetz et al.
2003/0113086 A1 6/2003 Jun et al.
2003/0174996 A1 9/2003 Henschel et al.
2003/0207601 A1 11/2003 Adachi
2004/0074852 A1 4/2004 Knudsen et al.
2004/0165852 A1 8/2004 Erwin et al.
2004/0228598 A1 11/2004 Allen et al.
2004/0264873 A1 12/2004 Smith et al.
2005/0002633 A1 1/2005 Solheid et al.
2005/0129379 A1 6/2005 Reagan et al.
2005/0163448 A1 7/2005 Blackwell, Jr. et al.
2006/0083475 A1 4/2006 Grubish et al.
2006/0115220 A1 6/2006 Elkins, II et al.
2006/0204200 A1 9/2006 Lampert et al.

FOREIGN PATENT DOCUMENTS

EP 0 788 002 8/1997
EP 0 871 047 10/1998
EP 0 975 180 1/2000
EP 1 045 267 10/2000

EX-1005

JP	63-229409	9/1988
WO	WO 98/53347	11/1998
WO	WO 00/75706 A2	12/2000
WO	WO 02/103429 A2	12/2002
WO	WO 2004/032532 A2	4/2004

OTHER PUBLICATIONS

Drawings showing another ADC fiber storage trough concept including presentation entitled "Fujitsu Fiber Management Project Fiber Trough Concept" by Kathy Barnes (7 pages), photos of trough disclosed in presentation by Kathy Barnes installed in a rack (3 pages) and presentation entitled "Fujitsu Fiber Management Project Fiber Trough Concept" by Dan Mertesdorf (9 pages), 19 total pages (Apr. 2002).

"Retainer Staright [sic] Removable SC," which shows a latch design, 2 pages (Jan. 17, 2006).

Brochure from Amphenol Corp. entitled "Amphenol® 954 Series one piece SC Connector," 2 pgs. (1990).

AMP Inc. catalog entitled "Fiber Optic Products," front and back covers and p. 59, (4 pgs.) (© 1991).

HRS catalog entitled "Optical Fibre Connectors," front and back covers and pp. 16, 17 and 49 (5 pages) (Mar. 1991).

AT&T Network Systems catalog entitled "Fiber Optic Products Innovation for wide ranging applications," front and back covers and pp. 6-1 through 6-16 (18 pages) (© 1995).

ADC Telecommunications, Inc.'s Outside Plant, Fiber Cross-Connect Solutions Products Brochure; front cover, Table of Contents, pp. 1-48, and back cover; revised Jun. 2002, Item No. 1047.

ADC Telecommunications, Inc.'s 6th Edition of Next Generation Frame (NGF) Product Family Ordering Guide; front cover, Table of Contents, pp. 1-41, and back cover; revised Feb. 2003, Item No. 820.

ADC Telecommunications, Inc.'s Fiber Optic, Cable Assemblies and Accessories Brochure; front cover, Table of Contents, pp. 1-23, and back cover; revised Apr. 2003, Item No. 100300.

ADC Telecommunications, Inc.'s OMX™ 600, Optical Distribution Frame Brochure; front cover, Table of Contents, pp. 1-14, and back cover; revised Feb. 2001, Item No. 854.

Iwano, S. et al., "MU-type Optical Fiber Connector System," *NTT Review*, vol. 9, No. 2, pp. 63-71 (Mar. 1997).

NTT Int'l Fiber Termination Module (FTM) & Premises Optical Distribution Cabinets (PODC) product brochure, 3 pages, undated. Sugita, E. et al., "SC-Type Single-Mode Optical Fiber Connectors," *Journal of Lightwave Technology*, vol. 7, No. 11, pp. 1689-1696 (Nov. 1989).

24 photos of LambdaUnite® Blank Card; "LambdaUnite® MultiService Switch (MSS)" brochure (2003); and "Lucent's LambdaUnite® Busts Out" official release (Jan. 29, 2002).

FONS Corporation's MDC Series Rack or Wall Mount Enclosures product sheet, 3 pages, (2002).

FONS Corporation's Modular Distribution Cabinets Rack Mount Enclosures, Model MDC-7, product sheet, 2 pages (2005) (shows the same device as shown in Exhibit A).

FONS Corporation's Technical Drawing No. 11669, Rev. D, of Distribution Cabinet Assembly MFDC-7, 1 page (technical drawing depicting the device shown in Exhibit B).

ADC Telecommunications, Inc.'s Secure Fiber Entrance Terminal (SFET) Brochure; front cover, pp. 2-7, and back cover; revised May 1998, Item No. 1005.

ADC Telecommunications, Inc.'s 2nd Edition of Fiber Panel Products; front cover, Table of Contents, pp. 1-111, and back cover; revised Jul. 1996, Item No. 846.

U.S. Appl. No. 11/729,425, filed Mar. 27, 2007 including Fourth Preliminary Amendment filed May 2, 2008.

Complaint relating to Civil Action No. 08-CV-02234-DWF-JSM, filed Jun. 13, 2008. on p. 3, the issue date for '620 should be Oct. 2, 2007 on p. 4, the issue date for '317 should be Apr. 3, 2007.

Complaint relating to Civil Action No. 08-CV-5222-RMK-JJK, filed Sep. 19, 2008 (8 pages).

FIG. 1

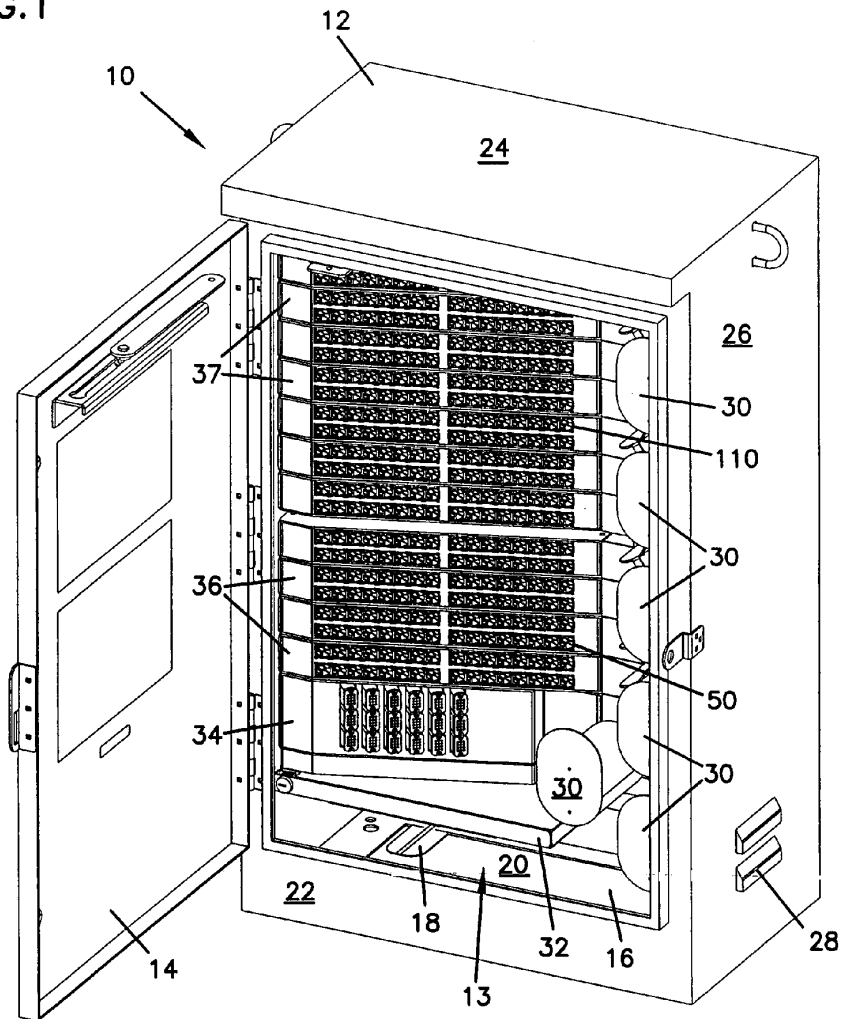
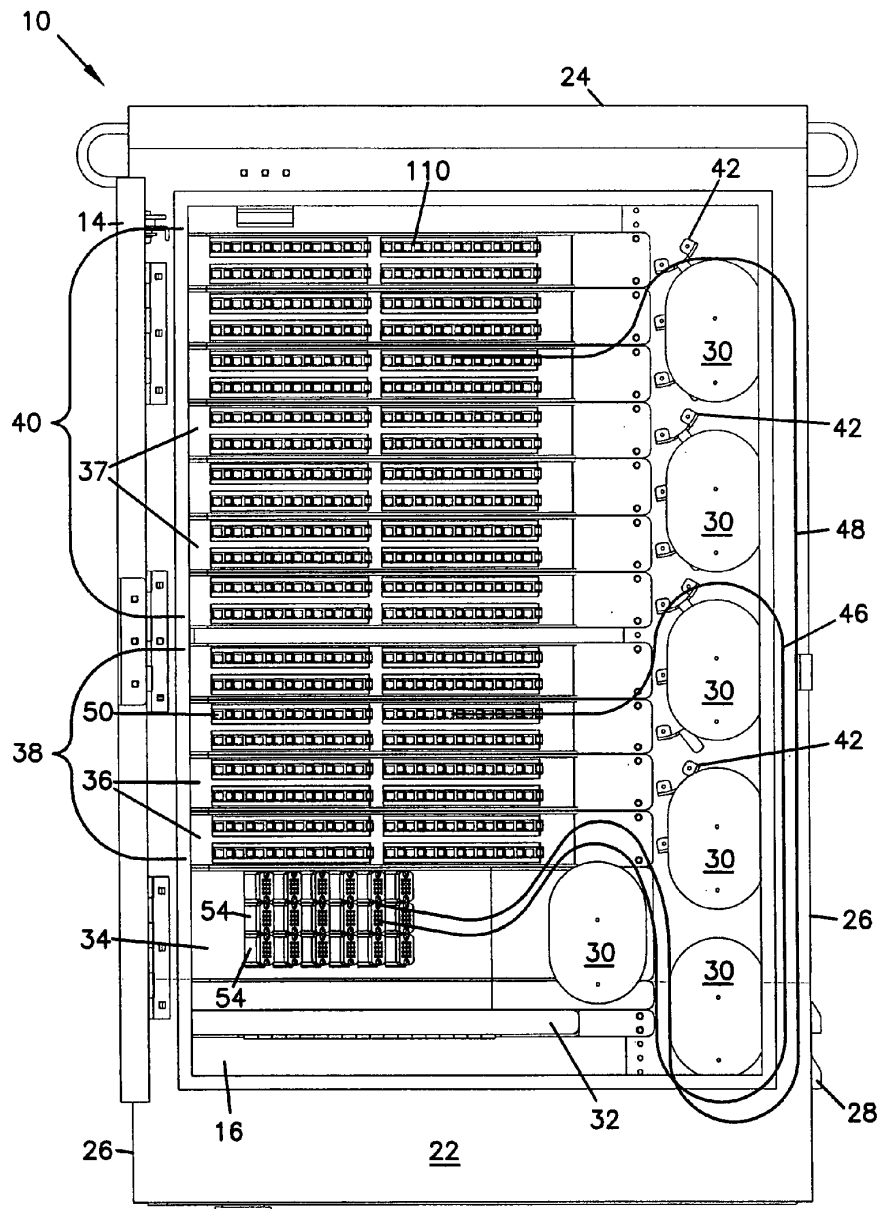


FIG. 2



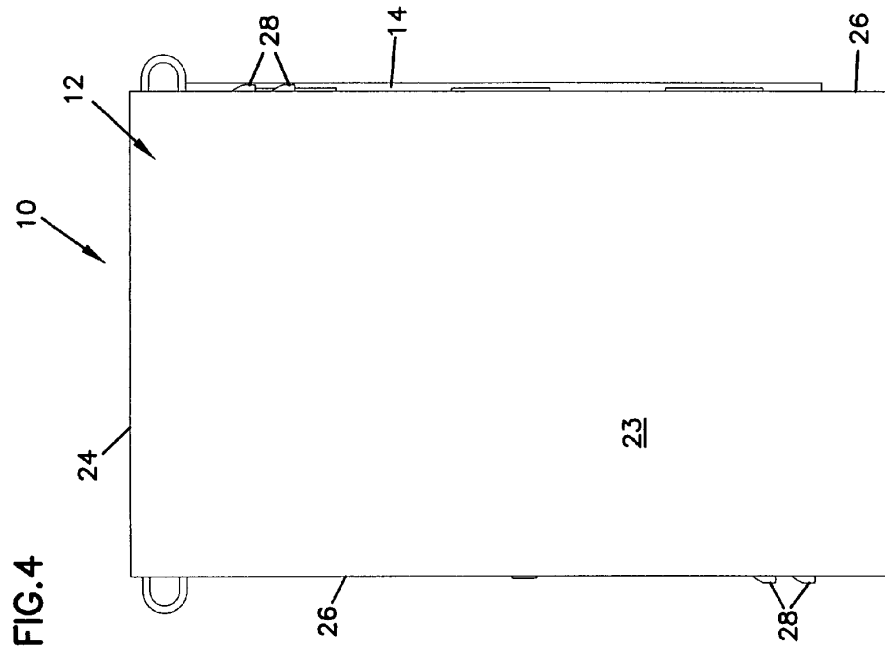
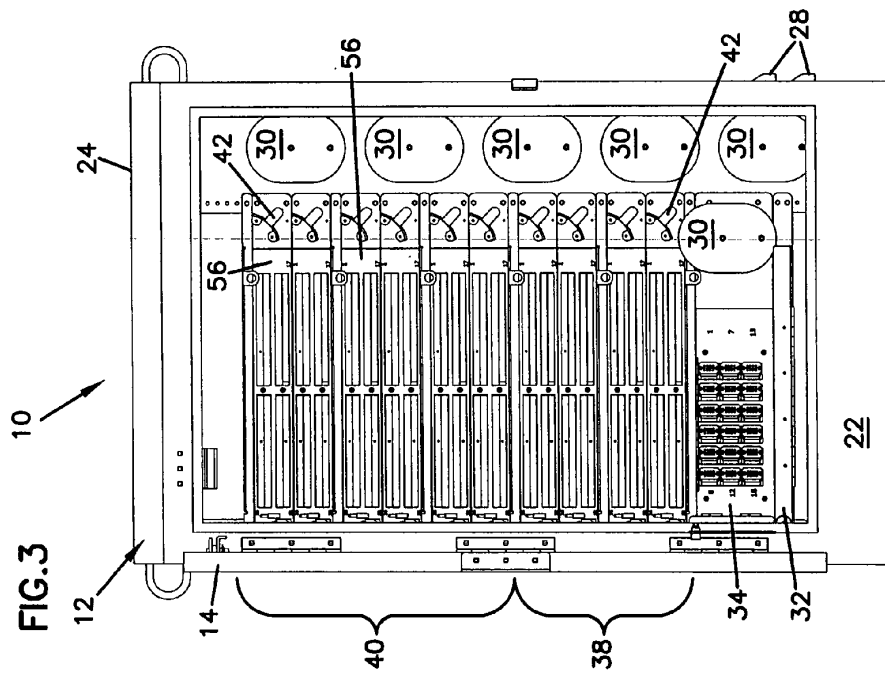


FIG. 6

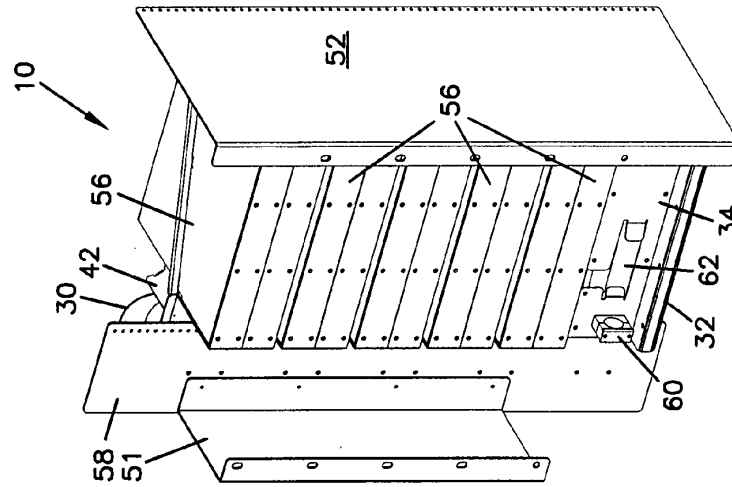


FIG. 5

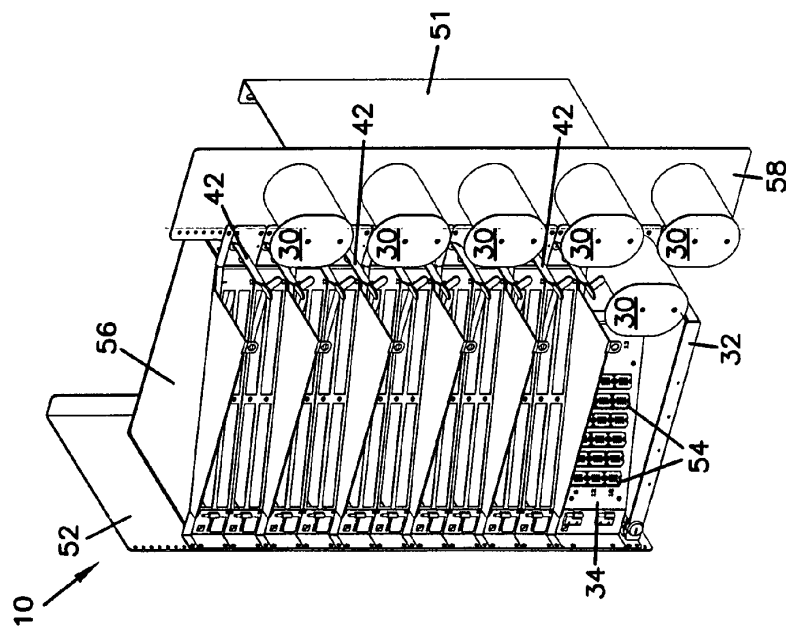


FIG. 8

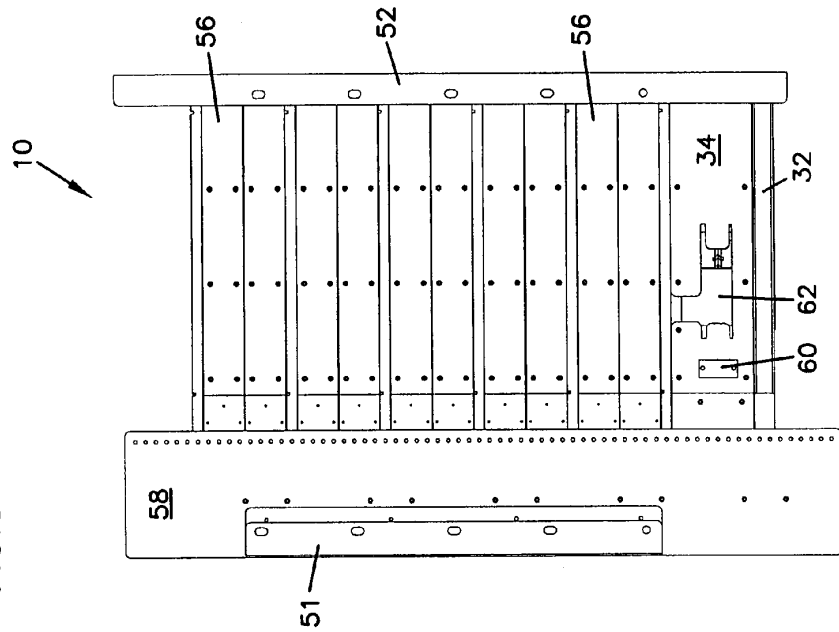


FIG. 7

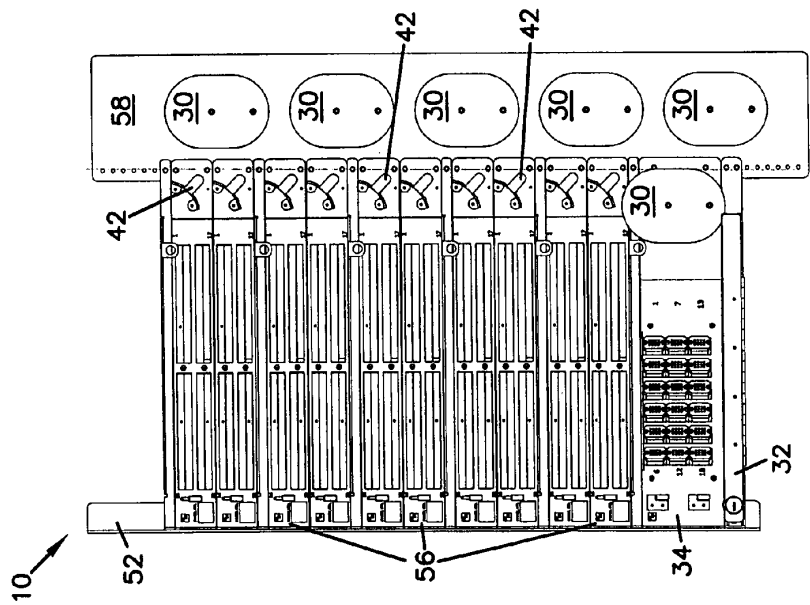


FIG.9

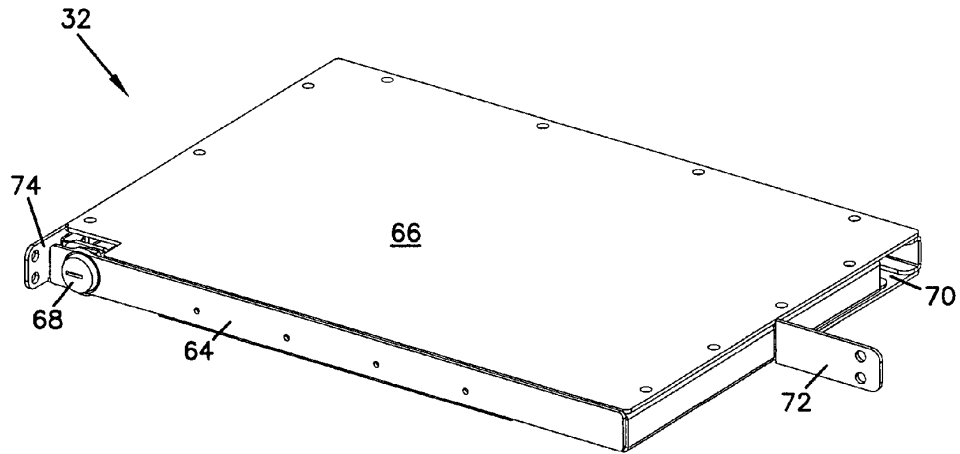


FIG.10

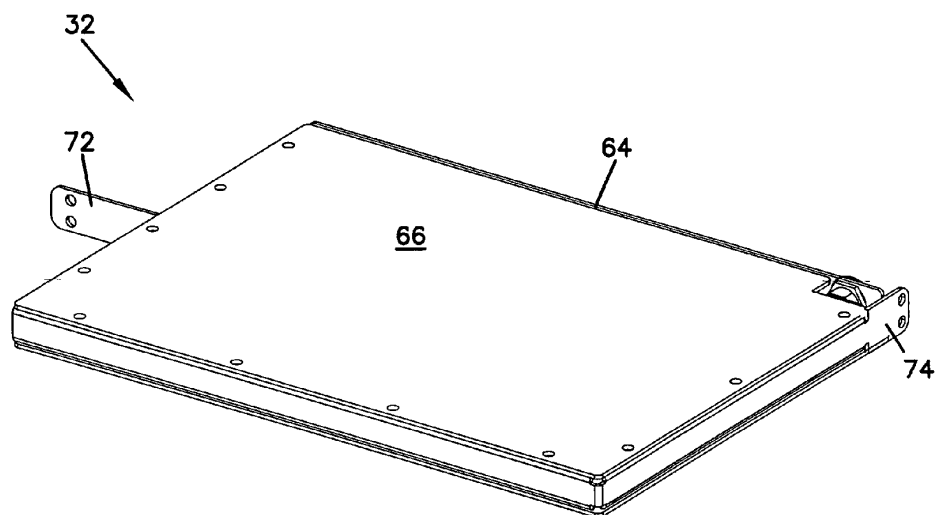


FIG. 11

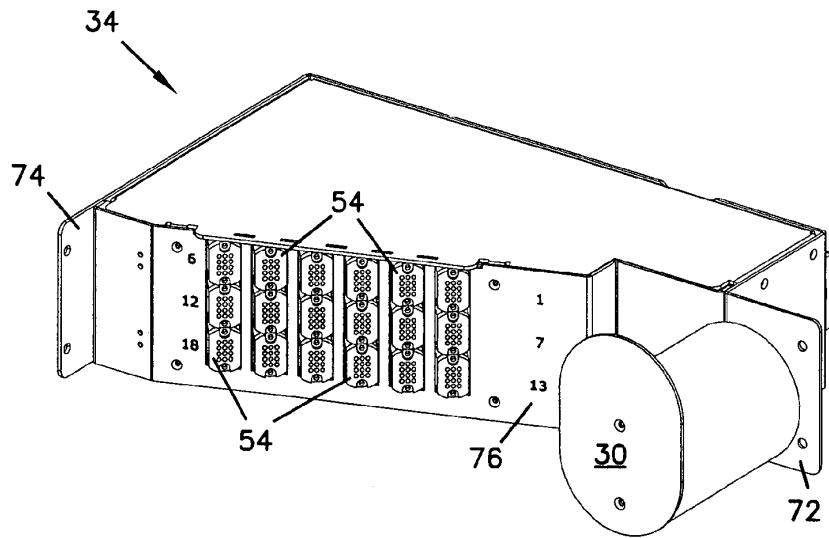


FIG. 12

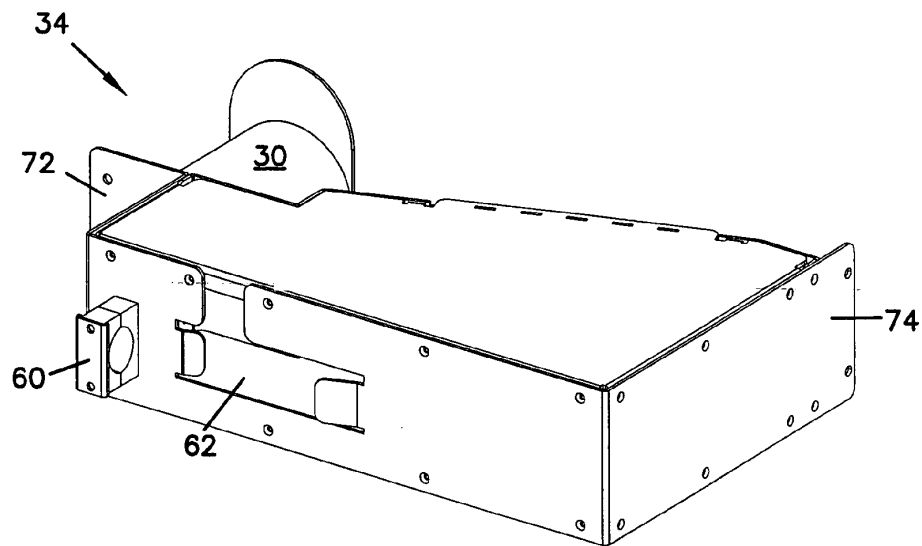


FIG.13

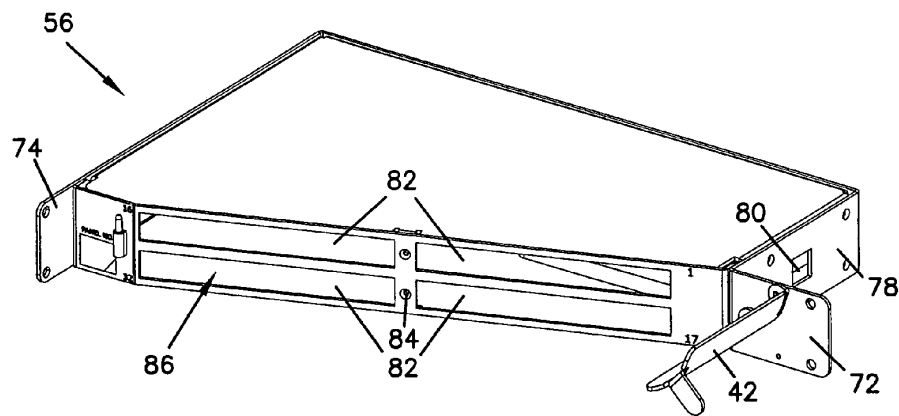
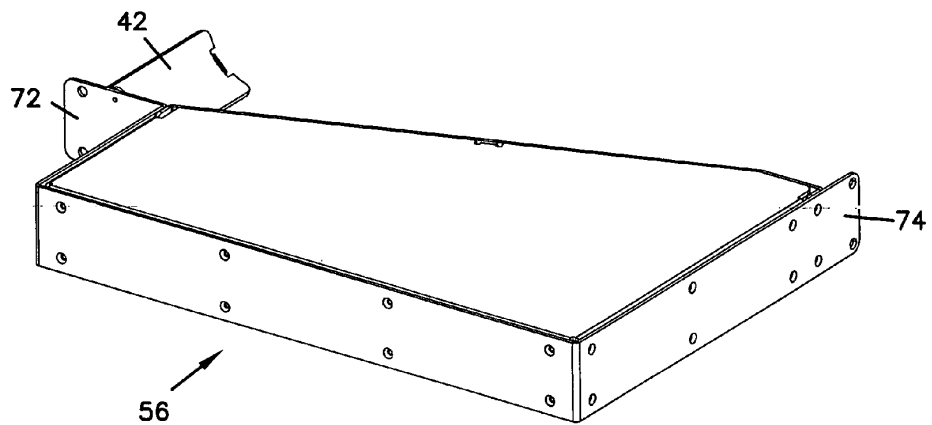
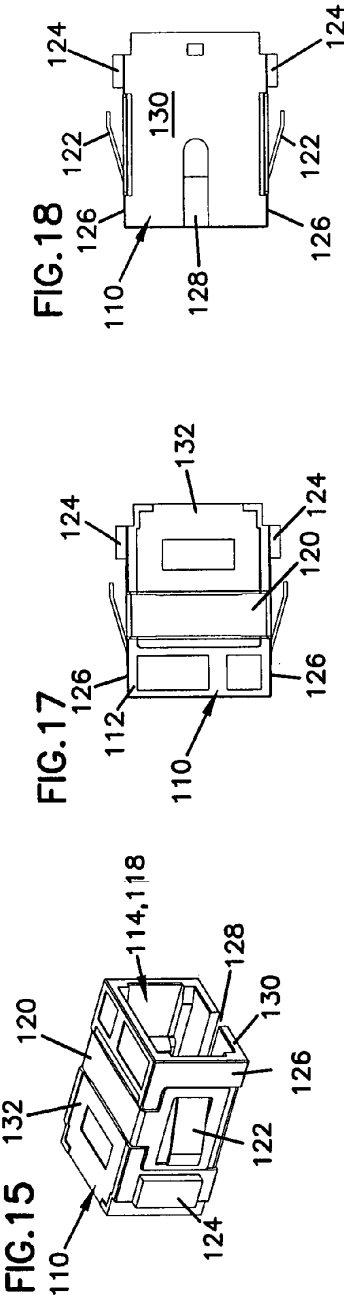
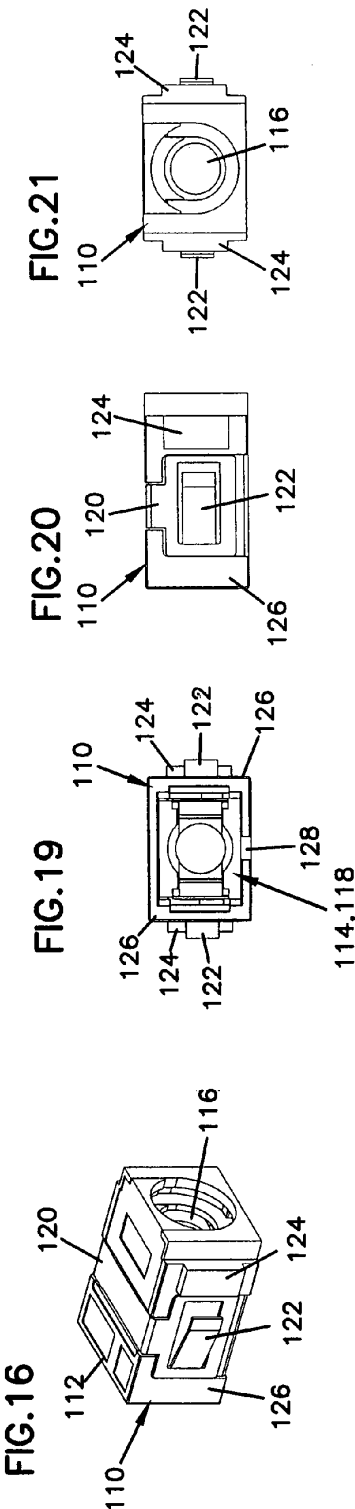
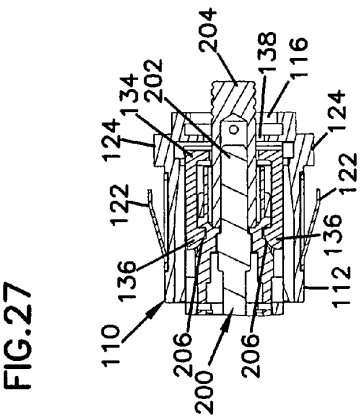

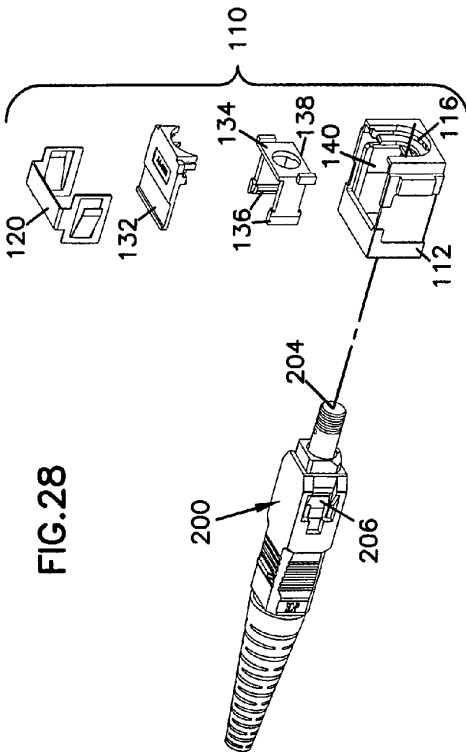
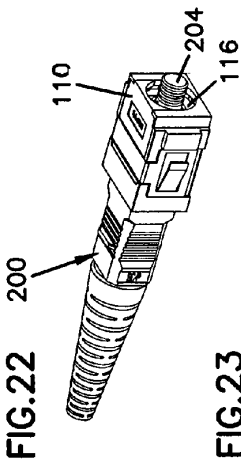
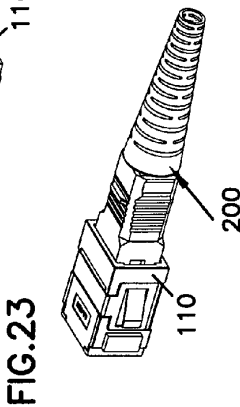
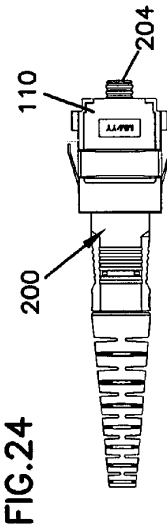
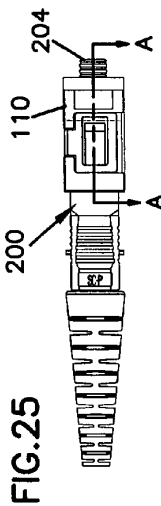
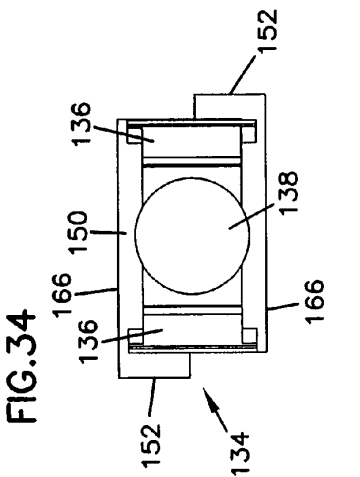
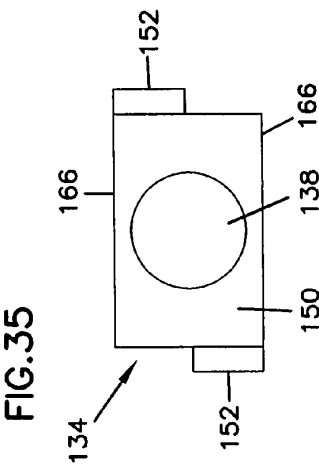
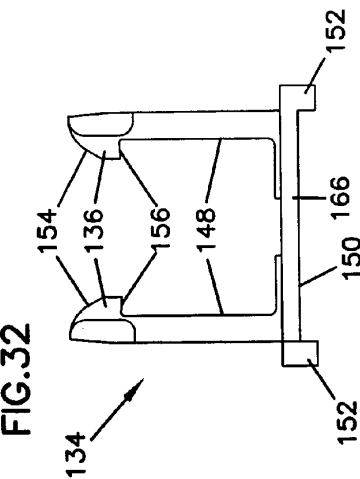
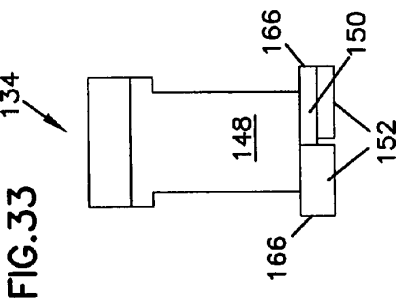
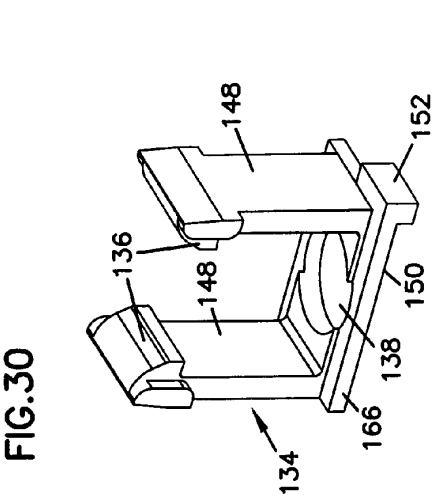
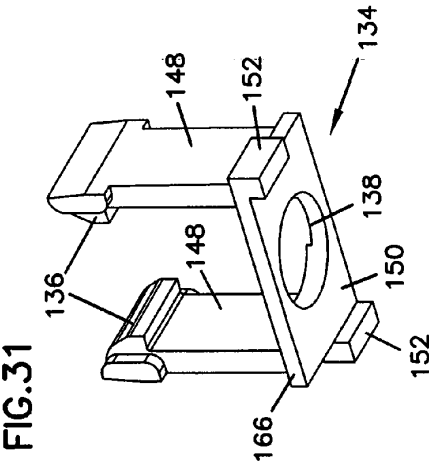



FIG.14













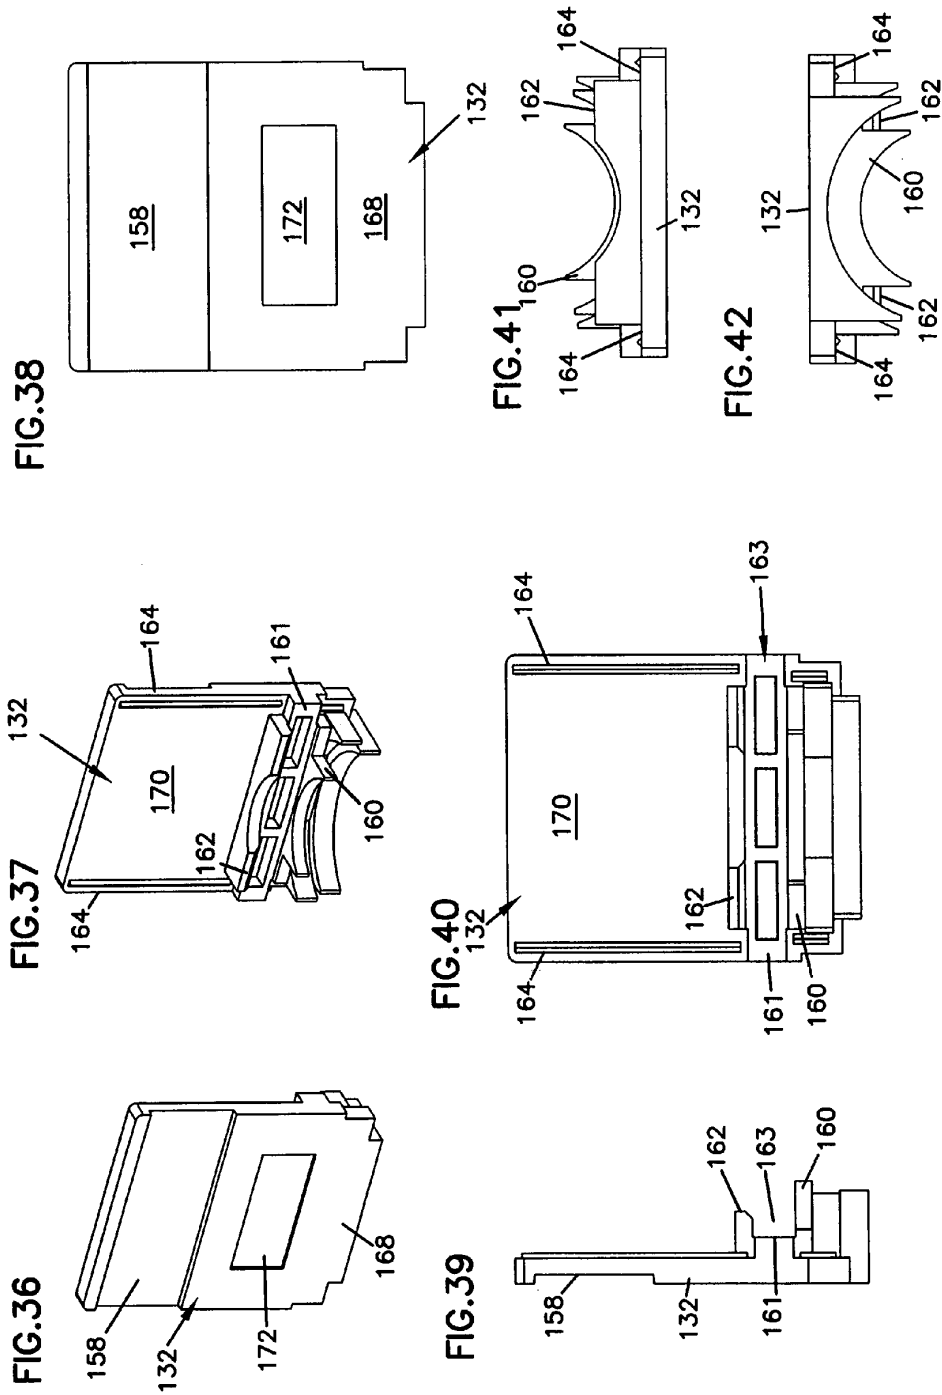

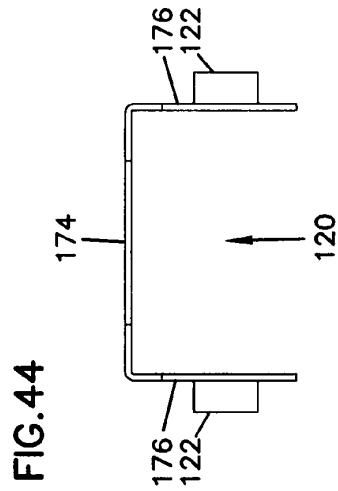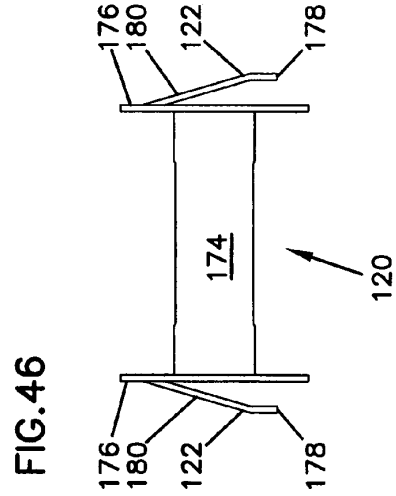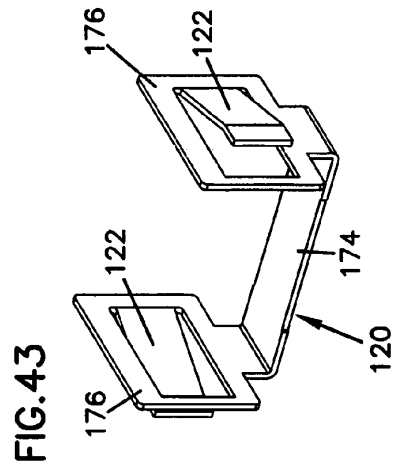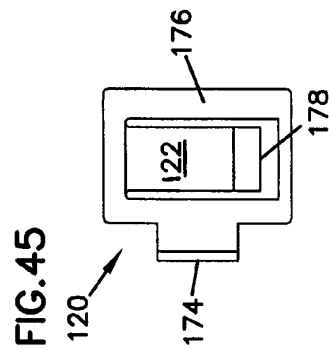

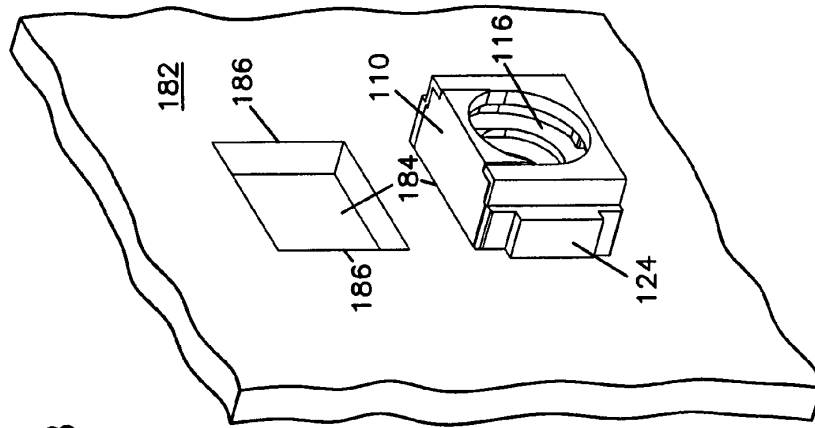


FIG. 48




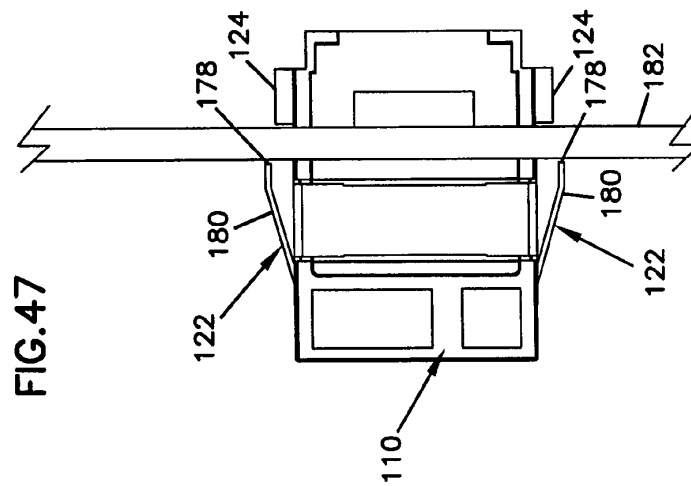


FIG. 47

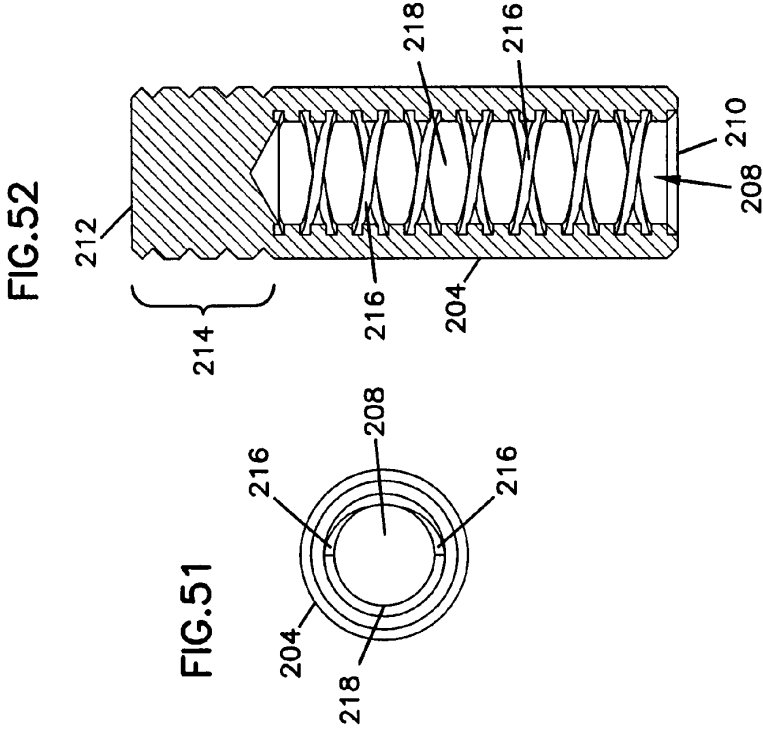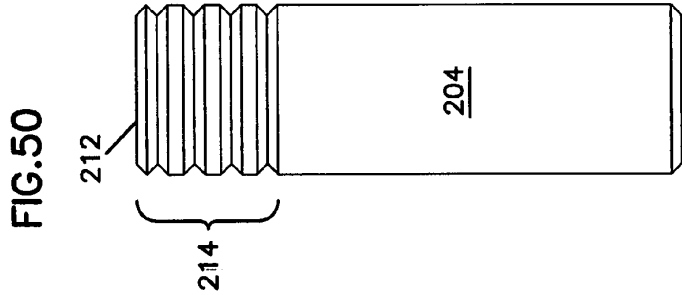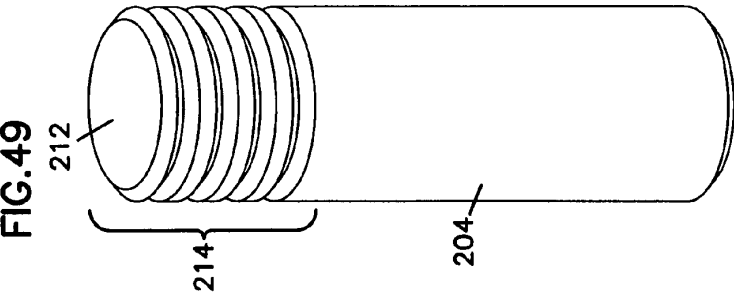

1

TELECOMMUNICATIONS CONNECTION CABINET

This application is a continuation of application Ser. No. 10/613,764, filed Jul. 2, 2003 now U.S. Pat. No. 7,233,731, which application is incorporated herein by reference.

FIELD OF THE INVENTION

The present invention generally relates to cabinets for connecting telecommunications cables.

BACKGROUND OF THE INVENTION

Installation of telecommunications equipment to support the current and potential future needs of a particular group of customers may make it desirable to install more capacity than the current customer base alone may dictate. Excess capacity may be installed to permit the easy addition of new circuits for new or existing customers. A telecommunications connection cabinet with such excess capacity may be pre-configured at a fabrication facility and installed in the field to include more circuits than are necessary to provide service to the existing customers. Prior to the linkage of these surplus or future expansion circuits to customers, it is desirable to provide for storage, organization and protection of the patch cords or other connection cables within the cabinet.

Such connection cables might include fiber optic patch cords terminated with fiber optic connectors. Fiber optic connectors include a polished end face, typically held by a ferrule, which permits positioning of the optical fiber held by the connector to receive and transmit signals another optical fiber or optical light source. It is desirable to keep these polished end faces as free of contaminants as possible to improve the transmission of light to and from the optical fiber held by the connector. Such contaminants which might adversely impact the transmission of light to and from the optical fiber include but are not limited to dust and finger prints.

Dust caps may be provided for connectors to protect the polished end face of the optical fiber. However, when such dust caps are in place, the connector is not capable of being received in known optical fiber adapters, such as those described in U.S. Pat. Nos. 5,317,663, and 6,347,888. The disclosures of these patents are incorporated herein by reference. A connector may be inserted into one of these known adapters for storage or pre-wiring of a cross-connection point, an interconnection point or some other type telecommunications switching or connection equipment with the dust cap removed. While the adapters might provide some protection from contaminants to a single connector inserted into an adapter, these adapters are not as effective as a dust cap in protecting the polished end face.

It is desirable to improve the known methods and apparatus for protecting the polished end face of a fiber optic connector within telecommunications equipment.

SUMMARY OF THE INVENTION

A telecommunications cabinet comprising a top, a floor, a pair of opposing sides, a front wall and a rear wall defining an interior, the front including an access door for accessing the interior. Within the interior are mounted a cable management structure, an adapter panel with an adapter configured to optically connect two optical fiber cables terminated with fiber optic connectors, and a fiber optic connector holder mounted in openings of the adapter panel. The connector holder has an opening configured to receive a fiber optic

2

connector with a dust cap, the opening accessible from a front side of the adapter panel. A fiber optic connector including a ferrule with a polished end face holding an end of an optical fiber with a dust cap placed about the ferrule and polished end face is inserted within the opening of a fiber optic connector holder.

A telecommunications connection rack with a rack mounting structure, and a cable management structure, a fanout panel and an adapter panel mounted to the rack mounting structure. The adapter panel includes a plurality of adapter openings sized to receive and mount fiber optic adapters for optically connecting optical fibers within fiber optic cables terminated with fiber optic connectors, and a plurality of optical fiber adapters mounted within the openings. A cable connector holder panel is mounted to the rack mounting structure and includes a plurality of openings sized similarly to the openings in the adapter panel and a plurality of fiber optic connector holders mounted within the openings. Each of the fiber optic connector holders is configured to receive a fiber optic connector with a dust cap in place about a polished end face of a ferrule holding the end of an optical fiber. The cable management structure is configured to direct a fiber optic cable from the fanout panel to each of the adapter panel and the cable connector holder panel and to store excess cable length.

A method of connecting telecommunications service cables including providing a equipment mounting rack with a fanout module, an adapter module, a connector holder module and a cable management structure mounted to the rack. A multi-strand optical fiber service cable is directed to the fanout module. The multiple strands of the service cable are separated into individual fiber patch cords extending from the fanout module, with a distal end of each patch cord terminated with a fiber optic connector. The fiber optic connectors include a dust cap positioned about a polished end face. A first patch cord is extended from the fanout module into the cable management structure so that the connector of the first patch cord is proximate a fiber optic connector holder mounted within an opening in a front of the connector holder module. The fiber optic connector of the first patch cord is inserted into the fiber optic connector holder without removing the dust cap. The connector of the first patch cord is withdrawn from the connector holder. The dust cap is removed from the polished end face. The first patch cord is adjusted within the cable management structure so that the connector is adjacent an fiber optic adapter mounted within an opening in a front of the adapter module. The connector of the first patch cord is inserted into the adapter so that the optical fiber of the patch cord is optically connected to a second connector inserted within an opposite end of the adapter.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the description, illustrate several aspects of the invention and together with the detailed description, serve to explain the principles of the invention. A brief description of the drawings is as follows:

FIG. 1 is front perspective view of a telecommunications connection cabinet according to the present invention with an access door to the front of the cabinet open.

FIG. 2 is front view of the telecommunications connection cabinet of FIG. 1 with illustrative cable paths.

FIG. 3 is a front view of the telecommunications connection cabinet of FIG. 1 with the adapters and connector holders removed.

3

FIG. 4 is a rear view of the telecommunications connection cabinet of FIG. 3.

FIG. 5 is a front perspective view of the rack, modules and cable management devices of the telecommunications cabinet of FIG. 1 removed from the cabinet.

FIG. 6 is a rear perspective view of the rack, modules and cable management structures of FIG. 5.

FIG. 7 is a front view of the rack, modules and cable management structures of FIG. 5.

FIG. 8 is a rear view of the rack, modules and cable management structures of FIG. 5.

FIG. 9 is a front perspective view of a splice drawer module for use with telecommunications connection cabinet of FIG. 1.

FIG. 10 is a rear perspective view of a splice drawer module for use with telecommunications connection cabinet of FIG. 1.

FIG. 11 is a front perspective view of a fanout module for use with telecommunications connection cabinet of FIG. 1.

FIG. 12 is a rear perspective view of a fanout module for use with telecommunications connection cabinet of FIG. 1.

FIG. 13 is a front perspective view of a chassis for the splitter module or the adapter module of telecommunications connection cabinet of FIG. 1.

FIG. 14 is a rear perspective view of a chassis for the splitter module or the adapter module of telecommunications connection cabinet of FIG. 1.

FIG. 15 is a first perspective view of a fiber optic connector holder according to the present invention.

FIG. 16 is a second perspective view of the fiber optic connector holder of FIG. 15.

FIG. 17 is a top view of the fiber optic connector holder of FIG. 15.

FIG. 18 is a bottom view of the fiber optic connector holder of FIG. 15.

FIG. 19 is a first end view of the fiber optic connector holder of FIG. 15.

FIG. 20 is a side view of the fiber optic connector holder of FIG. 15.

FIG. 21 is a second opposite end view of the fiber optic connector holder of FIG. 15.

FIG. 22 is a first perspective view of system for holder a fiber optic connector including the fiber optic connector holder of FIG. 15 with a fiber optic connector inserted.

FIG. 23 is a second perspective view of the system for holding a fiber optic connector of FIG. 22.

FIG. 24 is a top view of the system for holding a fiber optic connector of FIG. 22.

FIG. 25 is a side view of the system for holding a fiber optic connector of FIG. 22.

FIG. 26 is an end view of the system for holding a fiber optic connector of FIG. 22.

FIG. 27 is a cross-sectional view of the system for holding a fiber optic connector of FIG. 8, taken along line A-A in FIG. 25.

FIG. 28 is an exploded perspective view of the system for holding a fiber optic connector of FIG. 22.

FIG. 29 is a perspective view of the main housing of the fiber optic connector holder of FIG. 15.

FIG. 30 is a first perspective view of an inner housing of the fiber optic connector holder of FIG. 15.

FIG. 31 is a second perspective view of the inner housing of FIG. 30.

FIG. 32 is a top view of the inner housing of FIG. 30.

FIG. 33 is a side view of the inner housing of FIG. 30.

FIG. 34 is a first end view of the inner housing of FIG. 30.

4

FIG. 35 is a second end view of the inner housing of FIG. 30.

FIG. 36 is a first perspective view of the cover of the fiber optic connector holder of FIG. 15.

FIG. 37 is a second perspective view of the cover of FIG. 36.

FIG. 38 is a top view of the cover of FIG. 36.

FIG. 39 is a side view of the cover of FIG. 36.

FIG. 40 is a bottom view of the cover of FIG. 36.

FIG. 41 is a first end view of the cover of FIG. 36.

FIG. 42 is a second end view of the cover of FIG. 36.

FIG. 43 is a perspective view of the clip of the fiber optic connector holder of FIG. 29.

FIG. 44 is an end view of the clip of FIG. 43.

FIG. 45 is a side view of the clip of FIG. 43.

FIG. 46 is a bottom view of the clip of FIG. 43.

FIG. 47 is a top view of the fiber optic connector holder of FIG. 15 inserted within an opening in a bulkhead.

FIG. 48 is a perspective view of a bulkhead including a plurality of openings for receiving fiber optic connector adapters and the fiber optic connector holder of FIG. 15 inserted within one of the openings.

FIG. 49 is a perspective view of the dust cap of the fiber optic connector of FIG. 29.

FIG. 50 is a side view of the dust cap of FIG. 49.

FIG. 51 is an end view of the dust cap of FIG. 49.

FIG. 52 is a cross-sectional view of the dust cap of FIG. 49.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Reference will now be made in detail to exemplary aspects of the present invention which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or similar parts.

Telecommunications connection cabinets, such as cabinet 10 shown in FIG. 1, are used to permit organization and interconnection of different telecommunications infrastructure cables. A multi-strand telecommunications service cable such as an IFC or ribbon cable with multiple optical fibers, may be used to electronically or optically link widely spaced facilities. The service cable may be directed into cabinet 10 where it may be connected to a fanout module 34 and separated into individual fibers. Each of these strands may be connected to a patch cord 46 which may be terminated with a fiber optic connector. The fiber optic connector of patch cord 46 (such as connector 200 described below) may then be inserted into the front of an adapter 50 mounted to an adapter module 36 within cabinet 10.

Adapter module 36 may also include a splitter that combines the signals from up to 32 individual patch cords 46 into a single optical fiber cable. As shown in the FIGS., there are four adapter modules 36 with splitters. As configured, cabinet 10 may have up to four optical fibers carrying the signals from up to 128 patch cords 46. These up to four optical fiber cables are directed to a splice module 32 mounted within cabinet 10. These up to four cables are available to splice in splice drawer 32 for communication of the signals to other downstream telecommunication equipment.

For patch cords 48 connected to circuits for which connection to downstream telecommunications equipment is anticipated but not yet required, these patch cords are routed instead to a connector holder module 37. Connectors 200 terminating patch cords 48 are directed into a connector holder 110. These patch cords 48 are not optically linked to any downstream

5

equipment and are being stored and protected for damage or contamination in connector holders 110 until needed.

Referring now to FIGS. 1 and 2, cabinet 10 includes a housing 12 with a top 24, opposing sides 26, a front wall 22 and a floor 20. A rear wall 23, shown in FIG. 4 below, cooperates with the top, sides, front and floor to enclose the equipment mounted within housing 12 in an interior 13. Sides 26 include vent openings 28 which are shielded to prevent rain, snow and debris entry into interior 13. Front wall 22 includes a front access opening 16 permitting access to the front of the equipment mounted within interior 13. A door 14 is hinged to one side of opening 16 and closes off opening 16 to seal interior 13 from the elements when closed. A cable entry 18 in floor 20 allows the multi-strand telecommunications service cables to be fed into interior 13 and customer cables from the splice tray to exit interior 13. While only one opening 18 is shown in FIG. 1, additional openings in floor 20 may be provided depending on the size and number of cables entering and exiting cabinet 10.

Mounted within interior 13 is a variety of telecommunications equipment and supporting structure. As will be described below, interior 13 includes a rack mounting structure to which this telecommunications equipment is mounted. The equipment within interior 13 includes splice module 32, fanout module 24, a plurality of adapter modules 36, and a plurality of connector holder modules 37. Adjacent this equipment are mounted a plurality of cable storage spools 30 and bend radius protectors 42. Spools 30 and radius protectors 42 cooperate to direct cables between the fronts of the different telecommunications equipment mounted within interior 13.

Within interior 13, adapter modules 36 and connector holder modules 37 include a module housing, which will be discussed below. Each of the housings for modules 36 and 37 are mounted within the internal rack mounting structure of cabinet 10. Adapter modules 36 are grouped together in an active connection stack 38 and connector holder modules 37 are grouped together in a storage stack 40. Fanout module 34 is mounted beneath active connection stack 38 as the service cable enters cabinet 10 from below through opening 18. As configured in the drawings, cabinet 10 also directs the customer cables through floors 20, so splice module 32 is located below the active connection and storage areas. If the service and/or customer cables enter cabinet 10 through an opening through or adjacent to top 24, fanout module 34 and splice module 32 may be positioned above the active connection and storage areas.

Referring now also to FIGS. 3 and 4, cabinet 10 is configured to be a front access cabinet and no provision is made for allowing access through rear wall 23. In the field, a technician would only need to access the equipment mounted within cabinet 10 through front opening 16 to connect or disconnect a particular customer's circuit. All connections between the various equipment behind the equipment in the interior 13 are not easily accessible and are anticipated to be pre-configured and cabled before cabinet 10 leaves the manufacturing facility. Alternatively, rear wall 23 could be configured with an access door if such access is desired.

Modules 34, 36 and 37 include front faces which are angled with respect to front wall 22 to improve the positioning of cables between the cable management structures (including spools 30 and radius limiters 42) and adapters 50 and connector holders 110.

As shown in FIGS. 3 and 4, connector holders 110, adapters 50 and any splitters within modules 36 and 37 have been removed. The module housing 56 for each module 36 and 37 may be identical and will be described further below. As

6

shown in FIGS. 1 and 2, each module 37 includes 32 connector holders in each of seven connector holder modules 37. This provides a total storage capacity as configured of 224 connectors 200.

Fanout module 34 as shown in the FIGS. includes eighteen cable breakouts 54. Each cable breakout 54 allows for separation of a service cable or subunit of a service cable into a maximum of 12 fibers. This provides a maximum capacity for fanout module 34 to receive up to eighteen service cables or subunits of service cables, and separate out up to 216 patch cords 46 and 48 from these service cables. This permits a connector holder in storage area 40 for each of the maximum number of patch cords 46 and 48 that may extend from fanout module 34.

Patch cords 46 and 48 may be terminated with fiber optic connectors such as connector 200 shown in FIGS. 22 through 28, below. Optical fiber within these cables may be terminated at a polished end face held by a ferrule 202 in connector 200, as is well known in the art and shown in U.S. Pat. No. 5,317,663, incorporated herein by reference. These polished end faces and ferrules 202 need to be stored and protected until needed for connecting to other fiber optic cables or optical signal equipment.

Often a dust cap 204 may be placed about ferrule 202 and the polished end face of the optical fiber to protect the polished end face from contamination from dust, fingerprints or other items which might degrade optical signal transmission. While it is known to store these in known optical fiber adapters until the fiber within the attached cable is needed to connect to another fiber optic cable to optical signal equipment, such storage is less than ideal as adapters do not seal the polished end face from contamination as well as dust cap 204 securely fit and held about ferrule 202 of connector 200. Known adapters do not permit insertion of connector 200 which still has dust cap 204 in place about ferrule 202 and the polished end face of the cable.

Referring now to FIGS. 15 and 16, connector holder 110 includes a main housing 112 defining an interior cavity 114. An open end 118 permits insertion of a connector 200 into cavity 114 while an opposite opening 116 permits dust cap 204 to protrude from connector holder 110. A clip 120 is positioned about main housing 112 and includes a pair of spring mounting clips 122. A pair of flanges 124 extends from opposing sides 126 of main housing 112 adjacent spring clips 122. Clips 122 and flanges 124 cooperate to releasably mount holder 110 to an opening in a bulkhead as is shown below.

Main housing 112 also includes a bottom 130 with a keyway 128 to receive a keyed extension of connector 200 to consistently orient connector 200 for insertion into cavity 114. Opposite bottom 130 is an open top closed by a cover 132. This is shown in more detail in FIG. 26, below. FIGS. 17 through 21 provide additional views of connector holder 110.

Referring now to FIGS. 22 through 27, connector 110 is shown with connector 200 positioned within cavity 118. Dust cap 204 extends from opening 116 of connector holder 110 while connector 200 is inserted through open end 114.

Referring now to FIGS. 27 and 28, connector holder 110 further includes an inner housing 134 with a pair of opposing releasable catches 136 and an opening 138 sized to receive dust cap 204. Inner housing 134 is positioned within main housing 112 through an open top 140 with opening 138 adjacent opening 116 and catches 136 adjacent open end 114. Cover 132 is then positioned within open top 140 and clip 120 placed about cover 132 and main housing 112. Cover 132 may be sealed within open top 140 by gluing, ultrasonic welding or a variety of known fastening techniques. Con-

tor 200 includes a pair of opposing recesses 206 which receive catches 136 when connector 200 is inserted within holder 110.

As shown, connector 200 and holder 110 are SC style. Connector 200 and holder 110 may conform to other styles and formats of electrical connectors and adapters without straying from the spirit of the present invention.

Referring now to FIG. 29, main housing 112 also includes a slot 142 along both sides of cavity 114 to receiving and positioning a flange of inner housing 134 within cavity 114. A recess 144 is provided along sides 126 to receive clip 120. Open top 140 includes a ledge 146 upon which cover 132 is positioned to close cavity 114. An outer bulkhead 168 forms a portion of opening 116. An inner bulkhead 145 is positioned spaced apart from outer bulkhead 168 and these bulkheads cooperate to define slot 142. Between bulkheads 145 and 168 is a positioning surface 143 defining the bottom of slot 142.

Referring now to FIGS. 30 to 35, inner housing 134 includes a pair of clip arms 148 extending from a cross piece 150. Opening 138 for receiving dust cap 204 of connector 200 is in cross piece 150. Catches 136 are at the end of clip arms 148 opposite cross piece 150. Cross piece 150 includes a pair of flanges 152 which are received in slots 142 in main housing 112. As shown in FIG. 32, catches 136 include a ramped portion 154 which is engaged by connector 200 as connector 200 is inserted within cavity 114 through open end 118 of connector holder 110. Clip arms 148 are deflected outward allowing connector 200 to pass between catches 136. When connector 200 is fully inserted within cavity 114 (as shown in FIG. 27) catches 136 are received within recesses 206 and a retaining surface 156 of each catch 136 holds connector 200 within cavity 114.

Inner housing 134 is configured to permit insertion within slots 142 of cavity 114 of main housing 112 in either of two orientations. A pair of edges 166 of cross piece 150 properly position inner housing within cavity 114 with regard to cover 132 and main housing 112 so that opening 138 is aligned to receive dust cap 204.

Referring now to FIGS. 36 to 42, cover 132 includes a recess 158 for receiving clip 120 along an outer surface 168. Also in outer surface 168 is a recess 172 for receiving indicia. Along an inner surface 170 are formed a pair of edges 164 configured to be received upon ledges 146 of main housing 112. Extending from inner surface 170 is an outer flange 160 which cooperates with bulkhead 168 within main housing 112 to define opening 116. Also extending from inner surface 170 is an inner flange 162 which is spaced apart from outer flange 160 to form a slot 163. Slot 163 cooperates within slot 142 of main housing 112 to receive flanges 152 of inner housing 134.

At the top of slot 163 is a positioning surface 161 which cooperates with one of edges 166 of inner housing 134 to position inner housing 134 within cavity 114 so that opening 138 of inner housing 134 is aligned with opening 116. When assembled as connector holder 110, positioning surface 143 of main housing 112 and positioning surface 161 of cover 132 cooperate to engage both edges 166 of inner housing 134. Slot 142 of main housing 112 and slot 163 of cover 132 cooperate to capture flanges 152 of inner housing 134.

Referring now to FIGS. 43 to 46, clip 120 includes a cross piece 174 and a pair of opposing sides 176. Spring clips 122 are formed in sides 176. Sides 176 are received within recesses 144 of main housing 112 and cross piece 174 is received within recess 158 of cover 132. It is anticipated that clip 120 will be made of a resilient deformable metal to

facilitate insertion and removal from an opening in a bulkhead. Spring clips 122 each include an end 178 and a ramped surface 180.

FIGS. 47 and 48 shows fiber optic connector holder 110 inserted within an opening 184 in a bulkhead 182. Bulkhead 182 may be part of a piece of telecommunications switching equipment such as a panel for making a plurality of connections between optical fiber cables including a plurality of openings 84 for adapters, as shown in FIG. 48, or in connector holder module 37. Alternatively, bulkhead 182 may include only a single opening 184 where only a single fiber optic connector holder 110 is needed.

Open end 118 of connector holder 110 is inserted through opening 184 until a pair of sides 186 of opening 184 engage ramped surfaces 180 of spring clips 122. Continued insertion of connector holder 110 will cause bulkhead sides 186 to deflect spring clips 122 inward toward sides 126. Bulkhead sides 186 will eventually pass beyond ends 178 of spring clips 122. Spring clips 122 will then spring back as shown in FIG. 48, capturing bulkhead sides 186 between ends 178 and flanges 124. Connector holder 110 may be removed from opening 184 by compressing spring clips 122 and removing in a direction opposite the insertion described above.

Alternatively, flanges 124 may be configured to include a fastener opening so that connector holder 110 can be mounted within opening 184 by removable fasteners.

It is anticipated that openings 184 for mounting adapters and connector holders may be included in sliding adapter packs, such as described in commonly-owned U.S. Pat. No. 5,497,444. The disclosure of this patent is incorporated herein by reference.

Referring now to FIGS. 49 through 52, dust cap 204 includes a central opening 208 to receive ferrule 202 when ferrule 202 is inserted through open end 210. Opposite open end 210 is closed end 212 which includes knurling 214 to provide better grip for removing dust cap 204. Central opening 208 fits about ferrule 202 to provide a seal about ferrule 202 and to hold dust cap to connector 200. Due to the reduction of air volume within central opening 208 when ferrule 202 is inserted (see FIG. 27), one or more helix shaped recesses 216 are provided within central opening 208 along inner walls 218. Recesses 216 extend from adjacent closed end 212 to open end 210. Recesses 216 are small enough prevent entry of unwanted contaminants and still permit air displaced within central opening 208 to be expelled when ferrule 202 is inserted so that dust cap 204 may be fully seat to connector 200. Recesses 216 also allow air to pass into central opening 208 when dust cap 204 is withdrawn from ferrule 202. The shape of each recess 216 is also designed to allow passage of air into and out of central opening 208 when dust cap 204 is removed or placed on ferrule 202 while inhibiting the passage of contaminants along the same path.

Referring now to FIGS. 5 through 8, cabinet 10 is shown without housing 12. A pair of vertical supports 51 and 52 adjacent sides 26 of housing 12 provide mounting locations for the equipment mounted in cabinet 10. A cable management panel 58 is mounted to vertical support 51, and a plurality of cable spools 30 are mounted to panel 58. Bend radius protectors 42 are mounted to each module housing 56 adjacent panel 58 and provide bend radius protection for cables 46 and 48 being directed from spools 30 to modules 36 or 37.

Mounted to the rear of fanout module 34 is a cable clamp 60 for securing the service cable after it enters cabinet 10 through opening 18 in bottom 20. From clamp 60, the service cable, sub-units of the service cable or smaller bundles of optical fibers may enter fanout module 34 through rear opening 62. In addition to spools 30 mounted to panel 58, another

spool 30 is mounted to the front of fanout module 34 to provide bend radius protection and direct patch cords 46 and 48 from cable breakouts 54 into cable spools 30 of panel 58 and radius protectors 42 of modules 36 and 37.

Referring now to FIGS. 9 and 10, splice module 32 includes a splice drawer 64 slidably mounted within a housing 66. Splice module housing 66 includes a pair of mounting flanges 72 and 74 for mounting splice module 32 to panel 58 and vertical support 52. A locking drawer latch 68 is included in drawer 64 to prevent unwanted or accidental access to the splices within splice module 32. A rear opening 70 is provided to permit cables from modules 36 to enter housing 66 and be spliced in drawer 64.

Referring now to FIGS. 11 and 12, fanout module 34 includes a front face to which are mounted the eighteen cable breakouts 54. Fanout module 34 also includes a flange 72 for mounting to panel 58 and a flange 74 for mounting to vertical support 52.

Referring now to FIGS. 13 and 14, module housing 56 provides the basic shell for both adapter module 36 and connector holder module 37. Housing 56 includes a front face 84 with four openings 84. Openings 84 are sized and configured to receive up to eight adapters 50 or connector holders 110, so that a total of thirty-two patch cords 46 or 48 can be received. These adapters 50 or connector holders 110 may be held within opening 84 by a retainer clip such as that disclosed in commonly-owned U.S. Pat. No. 5,214,735, the disclosure of which is incorporated herein by reference. Module housing 56 also defines an interior space 86 with a cable exit 80 in a side wall 78. When module housing 56 is used for an adapter module 36, each adapter 50 mounted in openings 84 may have a connector 200 inserted into a rear side that will be optically linked with a connector 200 of patch cord 46 inserted into a front side. These rear connectors 200 may terminate fiber optic cables which may then extend through cable exit 80.

Alternatively, adapter module 36 may include a splitter within interior 86. Then, the connectors 200 attached to the rear of each adapter 50 would be optically connected to the splitter. The splitter would then combine the signals from each of the adapters 50 for a given module 36 into a single optical fiber cable which may then be directed out of module 36 through cable exit 80 and to rear opening 70 of splice module 32. Within splice module 32, each of the cables carrying the combined signals from the patch cords 46 connected to up to thirty-two adapters of a module 36 could be spliced into another cable for distribution of the signals to downstream equipment or customers.

As shown in the FIGS., cabinet 10 is configured for front access only, as no provision is made for an access opening through rear wall 23. Other configurations of housing 12 for cabinet 10 are contemplated, which may include providing additional access into interior 13. A preferred method of connecting a fiber optic service cable in cabinet 10 reduces the need access to the rear of the equipment mounted within housing 12.

To connect a service cable within cabinet 10, the service cable is fed into cabinet 10 through opening 18 in bottom 20. The service cable is directed into a space between the equipment mounted to vertical supports 51 and 52 and rear wall 23 and then clamped to the rear of fanout module 34 at clamp 60. From clamp 60, the cable may be broken out into sub-units and directed through opening 62 into an interior 61 of fanout module 34. Within interior 61, the sub-units of cable are further broken down to the individual fibers which are lead to cable breakouts 54 where they are passed out of interior 61 and preferably up-jacketed to standard patch cords 46 or 48 terminated with connectors 200. Patch cords 46 and 48 are

anticipated to standard size patch cords such as 1.7 mm, 2.0 mm, or otherwise appropriately sized for routing within cabinet 10.

From the breakouts 54, patch cords 46 and 48 are lead over spool 30 mounted to fanout module 34 and to the spools 30 mounted to panel 58. From these spools, the patch cords 46 and 48 are led past radius protectors 42 and connectors 200 inserted within an adapter 50 and a connector holder 110, respectively. Patch cords 46, as described above, are optically linked through adapter 50 and possibly a splitter within interior 86 of adapter module 36 to splice module 32 and then to downstream equipment. As described above, patch cords 48 are stored for future use in connector holders 110 with dust cap 104 in place to protect the polished end faces from damage or contamination.

When one of the stored or inactive patch cords 48 is needed for connection to downstream equipment, for instance when a new customer requests service or an existing customer needs to expand service, the desired inactive patch cord 48 is removed from connector holder 110. Dust cap 104 is removed from ferrule 102 of connector 200 and patch cord 48 is partially removed from spools 30 mounted to panel 58. This patch cord is then rerouted so that its connector 200 is adjacent the desired adapter 50 for connecting to downstream equipment. At this point, the former inactive patch cord 48 has become an active patch cord 46 and is inserted into the appropriate adapter 50. An active patch cord 46 may be converted to an inactive patch cord 48 by a reversal of the above process when a previously required circuit is no longer needed by a customer or other downstream equipment.

By configuring cabinet 10 as described above, only front access through access opening 16 is necessary in the field for a technician to connect a circuit for a new customer or an existing customer or to take a circuit out of service.

The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

What is claimed is as follows:

1. A telecommunications cabinet comprising:

- a housing including an access opening for accessing an interior of the housing, the housing also including at least one door for opening and closing the access opening;
- a plurality of connectorized fiber optic cords positioned within the housing, the plurality of connectorized fiber optic cords including a first plurality of connectorized fiber optic cords and a second plurality of connectorized fiber optic cords;
- a first cable routed out of the housing, the first cable being optically connected to the first plurality of connectorized fiber optic cords;
- a fiber optic splitter optically connected to the second plurality of connectorized fiber optic cords;
- a second cable routed out of the housing, the second cable being optically connected to the second plurality of connectorized fiber optic cords;
- an array of fiber optic adapters mounted within the interior of the housing for optically coupling the first plurality of connectorized fiber optic cords to the second plurality of connectorized fiber optic cords;
- a connector storage arrangement where fiber optic connectors of at least some of the connectorized fiber optic cords are stored within the housing, the connector storage arrangement including an array of storage ports;

11

the fiber optic connectors including connector bodies having first ends positioned within the storage ports, the fiber optic connectors also including ferrules positioned at the first ends of the connector bodies, the ferrules having side surfaces and end surfaces, the ferrules holding optical fibers having polished end faces positioned at the end surfaces of the ferrules; and

dust caps having open ends positioned opposite from closed ends, the dust caps including inner surfaces defining central openings that extend from the open ends to the closed ends of the dust caps, the dust caps being mounted on the ferrules of the fiber optic connectors with the inner surfaces of the dust caps engaging the side surfaces of the ferrules and the closed ends of the dust caps opposing the polished end faces of the optical fibers, the dust caps being mounted on the ferrules of the fiber optic connectors while the first ends of the fiber optic connectors are positioned within the storage ports.

2. The telecommunications cabinet of claim 1, further comprising a panel provided within the housing, wherein the connector storage arrangement is provided at a face of the panel.

3. The telecommunications cabinet of claim 2, wherein the connector storage arrangement includes a plurality of separate connector holders that define the array of storage ports, the connector holders being releasably mounted at the face of the panel.

4. The telecommunications cabinet of claim 3, wherein the panel is upright.

5. The telecommunications cabinet of claim 3, wherein the connector holders are secured to the panel by snap-fit connections.

6. The telecommunications cabinet of claim 3, wherein the connector holders are secured to the panel by resilient latches.

7. The telecommunications cabinet of claim 6, wherein the resilient latches extend through openings defined by the panel.

8. The telecommunications cabinet of claim 3, wherein the connector holders include main housings and an inner housings positioned within the main housings, the inner housings including a pairs of clip arms for retaining the fiber optic connectors within the connector holders.

9. The telecommunications cabinet of claim 8, wherein the main housings include rear openings through which the dust caps extend when the fiber optic connectors are mounted within the connector holders.

10. The telecommunications cabinet of claim 9, wherein the connector holders include retaining clips mounted on the main housings, the retaining clips including pairs of spring clips adapted for engaging openings in the panel to secure the connector holders to the panel.

11. The telecommunications cabinet of claim 1, wherein the fiber optic connectors also include grip housings mounted over the connector bodies, and wherein at least portions of the grip housings are positioned within the storage ports when the fiber optic connectors are stored at the connector storage arrangement.

12. The telecommunications cabinet of claim 11, wherein the grip housings include key members.

13. The telecommunications cabinet of claim 12, wherein the storage ports define slots for receiving the key members when the fiber optic connectors are stored within the storage ports.

14. The telecommunications cabinet of claim 11, wherein the grip housings are generally rectangular.

15. The telecommunications cabinet of claim 1, wherein the dust caps define internal helix shaped recesses.

12

16. The telecommunications cabinet of claim 15, wherein knurling is provided at the closed ends of the dust caps.

17. A telecommunications cabinet comprising:

a housing including an access opening for accessing an interior of the housing, the housing also including at least one door for opening and closing the access opening;

a plurality of connectorized fiber optic cords positioned within the housing, the plurality of connectorized fiber optic cords including a first plurality of connectorized fiber optic cords and a second plurality of connectorized fiber optic cords;

a first cable routed out of the housing, the first cable being optically connected to the first plurality of connectorized fiber optic cords;

a fiber optic splitter optically connected to the second plurality of connectorized fiber optic cords;

a second cable routed out of the housing, the second cable being optically connected to the second plurality of connectorized fiber optic cords;

a plurality of fiber optic adapters mounted within the interior of the housing for optically coupling the first plurality of connectorized fiber optic cords to the second plurality of connectorized fiber optic cords, the fiber optic adapters being mounted to a first panel surface within the housing;

a connector storage arrangement where fiber optic connectors of at least some of the connectorized fiber optic cords are stored within the housing, the connector storage arrangement being provided at a second panel surface within the housing, the second panel surface being separate from the first panel surface, and the second panel surface defining a plurality of openings for mounting a plurality of connector holders to the second panel surface, the connector holders defining connector storage cavities;

the fiber optic connectors including connector bodies having first ends positioned within the connector storage cavities, the fiber optic connectors also including ferrules positioned at the first ends of the connector bodies, the ferrules having side surfaces and end surfaces, the ferrules holding optical fibers having polished end faces positioned at the end surfaces of the ferrules; and

dust caps having open ends positioned opposite from closed ends, the dust caps including inner surfaces defining central openings that extend from the open ends to the closed ends of the dust caps, the dust caps being mounted on the ferrules of the fiber optic connectors with the inner surfaces of the dust caps engaging the side surfaces of the ferrules and the closed ends of the dust caps opposing the polished end faces of the optical fibers, the dust caps being mounted on the ferrules of the fiber optic connectors while the first ends of the fiber optic connectors are positioned within the connector storage cavities.

18. The telecommunications cabinet of claim 17, wherein the second panel surface is upright.

19. The telecommunications cabinet of claim 17, wherein the connector holders are secured at the second panel surface by resilient latches that extend through the openings in the second panel surface.

20. The telecommunications cabinet of claim 17, wherein the fiber optic connectors also include grip housings mounted over the connector bodies, and wherein at least portions of the grip housings are positioned within the connector storage cavities when the fiber optic connectors are stored at the connector storage arrangement.

13

21. The telecommunications cabinet of claim 20, wherein the grip housings include key members.

22. A telecommunications connection cabinet comprising:

a housing including an access opening for accessing an interior of the housing, the housing also including at least one door for opening and closing the access opening;

a plurality of telecommunications adapters mounted within the interior of the housing, each telecommunications adapter being configured for coupling together two fiber optic connectors such that an optical interconnection is made between the two fiber optic connectors;

a fiber optic splitter positioned within the housing;

a fiber optic cord positioned within the housing, the fiber optic cord having an end that terminates at a fiber optic connector;

a connector holder positioned within the housing, the connector holder defining at least one connector receptacle;

the fiber optic connector being stored at the connector holder, the fiber optic connector including a connector body having a first end positioned within the connector receptacle of the connector holder, the fiber optic connector also including a ferrule positioned at the first end of the connector body, the ferrule having a side surface and an end surface, the ferrule holding an optical fiber having a polished end face positioned at the end surface of the ferrule;

the connector holder having at least a portion that deflects when the fiber optic connector is inserted into the connector receptacle of the connector holder; and

a dust cap having an open end positioned opposite from a closed end, the dust cap including an inner surface defining a central opening that extends from the open end to the closed end of the dust cap, the dust cap being mounted on the ferrule of the fiber optic connector with the inner surface of the dust cap engaging the side surface of the ferrule and the closed end of the dust cap opposing the polished end face of the optical fiber, the dust cap being mounted on the ferrule of the fiber optic connector while the fiber optic connector is stored at the connector holder.

23. The telecommunications cabinet of claim 22, wherein the fiber optic connector also includes a grip housing slidably mounted over the connector body, and wherein at least a portion of the grip housing is positioned within the connector receptacle of the connector holder when the fiber optic connector is stored at the connector holder.

24. The telecommunications cabinet of claim 22, wherein the connector holder includes a latch that secures the connector holder to a panel defining a connector storage location within the housing.

25. The telecommunications cabinet of claim 24, wherein the latch extends through an opening defined by the panel.

26. The telecommunications cabinet of claim 22, wherein the connector holder is mounted at a face of an upright panel.

27. A telecommunications connection cabinet comprising:

a housing including an access opening for accessing an interior of the housing, the housing also including at least one door for opening and closing the access opening;

a plurality of telecommunications adapters mounted within the interior of the housing, each telecommunications adapter being configured for coupling together two fiber optic connectors such that an optical interconnection is made between the two fiber optic connectors;

a fiber optic splitter positioned within the housing;

14

a fiber optic cord positioned within the housing, the fiber optic cord having an end that terminates at a fiber optic connector;

a connector holder positioned within the housing, the connector holder defining at least one connector receptacle; the fiber optic connector being stored at the connector holder, the fiber optic connector including a connector body having a first end positioned within the connector receptacle of the connector holder, the fiber optic connector also including a ferrule positioned at the first end of the connector body, the ferrule having a side surface and an end surface, the ferrule holding an optical fiber having a polished end face positioned at the end surface of the ferrule;

the fiber optic connector also including a grip housing slidably mounted over the connector body, wherein at least a portion of the grip housing is positioned within the connector receptacle of the connector holder when the fiber optic connector is stored at the connector holder; and

a dust cap having an open end positioned opposite from a closed end, the dust cap including an inner surface defining a central opening that extends from the open end to the closed end of the dust cap, the dust cap being mounted on the ferrule of the fiber optic connector with the inner surface of the dust cap engaging the side surface of the ferrule and the closed end of the dust cap opposing the polished end face of the optical fiber, the dust cap being mounted on the ferrule of the fiber optic connector while the fiber optic connector is stored at the connector holder.

28. The telecommunications cabinet of claim 1, further comprising an adapter module at which the array of fiber optic adapters is located, and a storage module for at which the array of storage ports is located.

29. The telecommunications cabinet of claim 28, wherein the adapter module includes a housing in which the splitter is located.

30. The telecommunications cabinet of claim 1, further comprising a plurality of adapter modules each including one of the arrays of fiber optic adapters, and a plurality of storage modules each including one of the arrays of storage ports.

31. The telecommunications cabinet of claim 30, further comprising a fanout module and a splice module, wherein the storage modules are mounted at a first location within the housing, wherein the adapter modules are mounted at a second location below the first location, wherein the fanout module is located at a third location below the second location, and the splice module is located at a fourth location below the third location.

32. The telecommunications cabinet of claim 1, wherein the access opening comprises a front access opening, and wherein the cabinet includes a vertical cable management routing path laterally offset from the array of fiber optic adapters and the array of storage ports.

33. The telecommunications cabinet of claim 32, wherein vertically separated spools are provided along the vertical cable management routing path.

34. The telecommunications cabinet of claim 32, wherein the array of fiber optic adapters is mounted on a panel having a front face that is angled in a front to rear direction relative to the front access opening to facilitate cable routing to the vertical cable management routing path.

35. The telecommunications cabinet of claim 32, wherein the array of fiber optic adapters and the array of storage ports are mounted on panels having front faces that are angled in a

15

front to rear direction relative to the front access opening to facilitate cable routing to the vertical cable management routing path.

36. The telecommunications cabinet of claim 1, further comprising a fanout module for fanning out at least one of the first and second pluralities of connectorized fiber optic cords. 5

37. The telecommunications cabinet of claim 36, wherein the fanout module includes an enclosure having front fanout locations and a rear cable pass-through opening, and wherein the fanout module also includes a cable management spool 10 located adjacent a front of the enclosure and a cable clamp located adjacent a rear of the enclosure.

38. The telecommunications cabinet of claim 1, further comprising first and second vertical supports positioned within the housing, a cable management panel connected to the first vertical support, a plurality of vertically spaced-part 15 attached to the cable management panel for transitioning the fiber optic cords from vertical routing paths to horizontal routing paths, the telecommunications cabinet further including a termination region and a storage region located laterally 20 offset from the cable management panel, the termination

16

region including a plurality of adapter modules each including one of the arrays of fiber optic adapters, and the storage region including a plurality of storage modules each including one of the arrays of storage ports.

39. The telecommunications cabinet of claim 38, wherein the access opening is at a front side of the housing, wherein the cable management panel faces in a forward direction, wherein the adapter modules and the storage modules include laterally facing mounting flanges that attach to the second vertical support and forwardly facing mounting flanges that attach to the cable management panel.

40. The telecommunications cabinet of claim 39, wherein adapter modules and the storage modules include front faces that are angled to face slightly laterally toward the cable management panel.

41. The telecommunications cabinet of claim 40, wherein the laterally facing mounting flanges attach to the second vertical support at locations that are positioned forward of the cable management panel.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,457,503 B2
APPLICATION NO. : 11/729310
DATED : November 25, 2008
INVENTOR(S) : Solheid et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

IN THE CLAIMS:

Col. 14, line 61, claim 34: "the anay of fiber optic" should read --the array of fiber optic--

Col. 14, line 66, claim 35: "the anay of fiber optic" should read --the array of fiber optic--

Signed and Sealed this
Twenty-sixth Day of February, 2013



Teresa Stanek Rea
Acting Director of the United States Patent and Trademark Office