

Doc Code: **TR.PROV**

Document Description: Provisional Cover Sheet (SB16)

PTO/SB/16 (11-08)

Approved for use through 01/31/2014 OMB 0651-0032

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

Provisional Application for Patent Cover Sheet

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c)

Inventor(s)

Inventor 1

Remove

Given Name	Middle Name	Family Name	City	State	Country i
Jose		Tellado	Mountain View	CA	US

Inventor 2

Remove

Given Name	Middle Name	Family Name	City	State	Country i
Gregory		Raleigh	Woodside	CA	US

All Inventors Must Be Listed – Additional Inventor Information blocks may be generated within this form by selecting the **Add** button.

Add

Title of Invention

USER EQUIPMENT LINK QUALITY ESTIMATION BASED ON POSITIONING

Attorney Docket Number (if applicable)

HWPII-1004-3

Correspondence Address

Direct all correspondence to (select one):

☒ The address corresponding to Customer Number

☐ Firm or Individual Name

Customer Number

86125

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are:

Entity Status

Applicant claims small entity status under 37 CFR 1.27

☒ Yes, applicant qualifies for small entity status under 37 CFR 1.27☐ No**Warning**

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

Signature

Please see 37 CFR 1.4(d) for the form of the signature.

Signature	/Brian Short/			Date (YYYY-MM-DD)	2012-10-15
First Name	Brian	Last Name	Short	Registration Number (If appropriate)	41309

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. This form can only be used when in conjunction with EFS-Web. If this form is mailed to the USPTO, it may cause delays in handling the provisional application.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that : (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

PATENT APPLICATION
USER EQUIPMENT LINK QUALITY ESTIMATION BASED ON
POSITIONING

Inventor(s): Jose Tellado, a citizen of the United States, residing at
1759 Cherrytree Ln
Mountain View, CA 94040

Gregory Raleigh, a citizen of the United States, residing at
131 Fox Hollow Road
Woodside, CA 94062

Assignee: Headwater Partners II LLC
350 Marine Parkway, Suite 300, Redwood City, CA 94065

Entity: Small

USER EQUIPMENT LINK QUALITY ESTIMATION BASED ON POSITIONING

FIELD OF THE INVENTION

The described embodiments relate to communications. More specifically, the described embodiments relate to estimating a user equipment link quality based on positioning.

5

BACKGROUND

In many environments the link quality between a plurality of base stations and a plurality of user equipment varies significantly over time, space (for example movement of the user equipment), frequency band, etc., for example due to space/time/frequency selective fading, or shadowing from objects (buildings, trees, etc.), etc.. For many wireless access technologies the base station and user equipment attempt to adapt the transmission mode to exploit high data rates while providing desirable robustness of the data communication. In some systems, for the link to be efficient and robust the link quality should be monitored over space/time/frequency. Link quality information exchanged between the base station and the user equipment may become stale (if not updated fast enough) and may take significant wireless communication resources (for example over a control channel). Therefore it is desirable to have improved systems and methods for estimating a user equipment link quality based on a positioning of the user equipment

10

15

SUMMARY

An embodiment includes a system. The system includes a base station and a user equipment (UE), wherein the UE wirelessly communicates with the base station. At least one of a controller of the base station or a controller of the UE is operative to determine a plurality of link qualities (LQs) of the UE for a plurality of positionings of the UE, wherein at least one of the plurality of positionings includes at least a location or an orientation of the UE, store information associated with the plurality of LQs for the plurality of positionings, estimate at least one future positioning of the UE, and estimate a future link quality (LQ) of the UE at the at least one future positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the UE.

20

25

Another embodiment includes a method. The method includes determining a plurality of link qualities (LQs) of a user equipment (UE) for a plurality of positionings of the UE, wherein at least one of the plurality of positionings includes at least a location or an orientation of the UE,

30

storing information associated with the plurality of LQs for the plurality of positionings, estimating at least one future positioning of the UE, and estimating a future link quality (LQ) of the UE at the at least one future positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the UE.

- 5 Other embodiments are directed to systems, apparatuses, and computer readable media associated with methods described herein.

Reference to the remaining portions of the specification, including the drawings and claims, will realize other features and advantages of the described embodiments. Further features and advantages of the described embodiments, as well as the structure and operation of
10 various embodiments of the described embodiments, are described in detail below with respect to the accompanying drawings. In the drawings, like reference numbers can indicate identical or functionally similar elements.

BRIEF DESCRIPTION OF THE DRAWINGS

- Figure 1 shows a wireless communication system, according to an embodiment.
- 15 Figure 2 shows a backhaul system, according to an embodiment.
- Figure 3 shows another backhaul system, according to an embodiment.
- Figure 4 shows another backhaul system, according to an embodiment.
- Figure 5 shows another backhaul system, according to an embodiment.
- Figure 6 shows another backhaul system, according to an embodiment.
- 20 Figure 7a shows another backhaul system, according to an embodiment.
- Figure 7b shows another backhaul system, according to an embodiment.
- Figure 8 shows a system for estimating a future link quality of a user equipment (UE) device at a future positioning, according to an embodiment.
- Figure 9 shows another system for estimating a link quality of a UE device at a
25 neighboring positioning, according to an embodiment.

Figure 10 shows another system for estimating a future link quality of a UE device at a future time based on a future positioning, according to an embodiment.

5 Figure 11 shows another system for estimating a future link quality of a second UE device at a future positioning based on link qualities, based on a plurality of positionings of a first UE device, according to an embodiment.

Figure 12 shows a wireless system that includes characterizing of interference at a user equipment, according to an embodiment.

Figure 13 shows another wireless system that includes characterizing of interference at a UE device, according to an embodiment.

10 Figure 14 shows another wireless system that includes characterizing of interference at a UE device, according to an embodiment.

Figure 15 shows a wireless system that includes characterization of interference at a base station, according to an embodiment.

15 Figure 16 shows an example of three base stations scheduling resource blocks on the same frequency channel (or carrier) A (represented by rectangular blocks with x-axis in time units and y-axis in frequency units), according to an embodiment.

Figure 17 shows a plurality of base station cells, according to an embodiment.

20 Figure 18 shows two BS clusters (BS1-BS7 and BS11-BS17) simultaneously scheduling transmission modes or null transmissions or characterizing interference in parallel, according to an embodiment.

Figure 19a and 19b show examples of a pattern of a BS simultaneously scheduling transmission modes or null transmissions or characterizing interference in parallel, dynamically moving from a first cluster of BS to a second cluster of BS, according to one or more embodiments.

25

In at least some embodiments the plurality of BSs wirelessly communicate with a plurality of user equipment (UE) device, such as UE device 121 (wirelessly communicating with BS 100), UE device 122 (wirelessly communicating with BS 111), UE device 123 (wirelessly communicating with BS 112). The wireless communication access traffic (or data or data
5 payload) associated with UE devices 121, 122, 123 may be associated with one or more data networks 140, 141 (for example a carrier network, or a company network, or the internet, or a core network). The wireless communication access traffic may include downlink (originating from the data network 140, 141) or uplink (originating from the UE devices 121, 122, 123) or both downlink (DL) and uplink (UL) traffic. For at least one embodiment the wireless
10 communication access traffic (or the backhaul traffic) include data associated (for example originating from or terminating at) with the UE device or control information associated with the wireless communication system (for example the X2 interface from the 4G or LTE WCT). Examples of control information associated with the wireless communicating system includes link performance (for example information associated with received signal quality, path loss,
15 channel between desired BS and one or more UE device or bUE device, SNR, interference, interference sources, etc.), traffic/data (for example information associated with QoS, packet delay, traffic loading, jitter, queue states or sizes, PER, etc.).

In at least some embodiments the wireless communication access traffic is communicated
20 to a data network 140, 141, through a backhaul communication technology, such as backhaul 130, 131, 132, 133, 134. The backhaul communication technology may include one or more of a fiber communication technology, a microwave link, a T1/E1, a cable or DSL communication technology or an alternative inband or out of band wireless (for example WiMAX or WiFi) communication technology. In at least some embodiments the backhaul requirements for a BS
25 include parameters associated with the BS or a plurality of UE devices associated with the BS. In at least some embodiments BS 100 may include a large coverage area, and a high density plurality of UE devices and include 2G/3G/4G wireless communication technology. For example BS 100 aggregate access traffic may be large and may require a Backhaul 130 with large bandwidth (for example a fiber communication technology or a microwave communication
30 technology). In at least some embodiments BS 122 includes a small coverage area (for example a home), and a small number of UE devices and include 4G wireless communication technology. For example BS 122 aggregate access traffic may be small and may require a Backhaul 130 with

small bandwidth (for example a DSL communication technology or a cable modem communication technology). In at least some embodiments the backhaul requirements associated with a BS includes one or more of a latency, a bandwidth, a PER (packet error rate), a packet jitter, a cost, a data cap, etc. In at least some embodiments the access traffic associated with the plurality of UE devices associated with a BS includes a plurality of backhaul requirements. For example a first UE device may be streaming video, which may require large bandwidth, but relaxed latency and PER requirements. For example a second UE device may be performing VoIP, which may require low latency, and small bandwidth. In at least some embodiments the backhaul associated with a BS (for example one or more of BS 100, 101, 110, 111, 112) may not satisfy the access traffic requirements of the plurality of UE devices associated with the BS. In at least some embodiments a BS may not have access to so-called traditional backhaul (such as T1/E1, microwave, fiber) or traditional backhaul installation time or installation costs are too high.

/*100 series.

Figure 2 shows an embodiment of a backhaul system, according to an embodiment. The system includes a base station (BS) (201), and a plurality of backhaul user equipment (bUE) devices (such as bUE devices 210, 211), each of the plurality of bUE devices 210, 211 operable to wirelessly communicate with the BS (201) through at least a first communication technology (for example wireless communication technologies (WCT) 210 and 211), and the plurality of bUE devices 210, 211 each operable to communicate with at least one data network (such as data networks 241, 242) through at least a second communication technology (for example backhaul communication technologies (CT) 230 and 231). For an embodiment, the BS (201) is operative to wirelessly communicate (for example wireless communication technologies (WCT) 222) with one or more user equipment (UE) devices (such as, UE device 212), and network connect the one or more UE devices (such as, UE device 212) to the at least one data network (241, 242) through one or more of the plurality of bUE devices 210, 211, select one or more of the plurality of bUE devices 210, 211 for backhaul (BH) traffic, wherein the BH traffic includes access traffic associated with the one or more UE devices (such as, UE device 212), aid in selecting a transmission power level of at least one of the plurality of bUE devices 210, 211, or at least one of the one or more UE devices (such as, UE device 212), and transmit resource block (RB) scheduling information for the BH traffic of at least one of the plurality of bUE devices 210, 211 and the access traffic of at least one of the one or more UE devices (such as, UE device 212).

It is to be understood that while Figure 2 only shows a single UE device 212, embodiments include the BS 201 wirelessly communicating with any number of UE devices. Further, while Figure 2 only shows two bUE devices 210, 211, embodiments includes any
5 number of bUE devices operable to wirelessly communicate with the BS 201. Further, while Figure 2 depicts the BS 201 operable to perform several steps, it is to be understood that embodiments include the operational steps being performed or aided by other devices. For example, the steps of selecting one or more of the plurality of bUE devices 210, 211 for backhaul (BH) traffic, and selecting a transmission power level of at least one of the plurality of bUE
10 devices 210, 211 can alternatively be wholly or partially performed somewhere else, such as, at a base station controller or in the cloud (for example at a cloud RAN or at a cloud BS).

In at least some embodiments the access traffic associated with UE device 212 (or a plurality of UE devices) includes a plurality of applications (for example streaming video, VoIP, browsing, gaming, etc.), each of which may include one or more plurality of access traffic
15 requirements (for example delay QoS, best effort, foreground, background, DL, UL, etc.) and may map into a set of backhaul requirements for selecting the bUE device. For example UE device 212 may need to upload (access traffic UL) a large file in the background. For this example a first bUE device may include a high bandwidth and high PER backhaul WCT link on the DL (for example a 4G/LTE link limited by bursty interference from aggressive frequency
20 reuse) and a second bUE device may include a low bandwidth and low PER WCT link on the DL (for example a 3G link limited by low SNR). For this example the access traffic requirements are better matched (or alternatively mapped or satisfied) by the first bUE device. For example UE device 212 application may include a VoIP (typically with low bandwidth, symmetrical
25 DL/UL, low latency access traffic requirements). For this example a first bUE device may include a high bandwidth, high latency and high jitter backhaul CT to a VoIP gateway (for example over a cable modem to a cable operator to a VoIP gateway) and a second bUE device may include a low bandwidth, low latency and low jitter CT link (for example a T1 to a core network). For this example the VoIP access traffic requirements are better matched (or
30 alternatively mapped or satisfied) by the second bUE device.

For at least one embodiment the bUE device 210 wirelessly communicates with the BS 201 on the same wireless technology (for example 4G-LTE) as the UE device 212 wirelessly communicates with the BS 201 but on a different channel or carrier. For at least one embodiment the bUE device 210 wirelessly communicates with the BS 201 on the first wireless
5 technology (for example 4G/LTE) as the UE device 212 wirelessly communicates with the BS 201 on a second wireless technology (for example 3G/HSPA).

/*[C2-C12] 100 series

Exemplary embodiments of the BS 201 include a cellular BS, a 3G NodeB, a 4G Long
10 Term Evolution (LTE) eNodeB. It is to be understood that this is not an exhaustive list.

For at least some embodiments, the plurality of bUE devices 210, 211 wirelessly communicate with the BS 201 over one or more of wireless communication technologies, wherein the one or more wireless communication technologies include at least one of WiFi,
15 WiMax, 3G, 4G, LTE, Orthogonal frequency division multiple access (OFDMA), Wideband code division multiple access (WCDMA).

For at least some embodiments, the one or more UE devices (such as, UE device 212) wirelessly communicate with the BS 201 over one or more of wireless communication
20 technologies, wherein the one or more wireless communication technologies include at least one of WiFi, WiMax, 3G, 4G, LTE, OFDMA, WCDMA.

For an embodiment, the one or more UE devices (such as, UE device 212) wirelessly communicate with the BS 201 and the plurality of bUE devices 210, 211 wirelessly
25 communicate with the BS 201 utilizing a same wireless communication technology. Further, for at least one embodiment, the one or more UE devices (such as, UE device 212) wirelessly communicate with the BS 201, and the plurality of bUE devices 210, 211 wirelessly communicate with the BS 201 utilizing the same wireless communication technology and a shared one or more frequency channels.

30

For at least some embodiments, at least one of the one or more UE devices (such as, UE device 212) or at least one of the plurality of bUE devices 210, 211 includes one or more of a

fixed client terminal, mobile terminal, a user terminal, an access terminal, a consumer premises equipment.

For various embodiments, at least one of the one or more UE devices (such as, UE device
5 212) or at least one of the plurality of bUE devices 210, 211 includes one or more of a cellular phone, a smart phone, a notebook, a laptop, a tablet, a PC.

For at least one embodiment, at least one of the plurality bUE devices 210, 211, is at least one of associated with or a part of a small cell BS, wherein the small cell BS includes client side
10 modem functionality. More specifically, for at least one embodiment the small cell BS includes one or more of a microcell, a picocell, a relay node, a femtocell. For at least one embodiment a small cell BS (for example one or more of a microcell, a picocell, a relay node, femtocell) includes client side modem functionality (for example a subset of a UE device or bUE device functionality). For at least one embodiment the small cell BS includes a backhaul CT to one or
15 more data networks. For these embodiments a small cell BS with client side modem functionality could function as a bUE device. For at least one embodiment each of the first BS and the small cell BS including bUE device functionality include backhaul CT and the access traffic associated with the first BS could be communicated over the WCT through the small cell BS including bUE device functionality. For at least one embodiment each of the first BS and the
20 small cell BS including bUE device functionality include backhaul CT and the access traffic associated with the small cell BS including bUE device functionality could be communicated over the WCT through the first BS. For at least one embodiment each of the first BS and the small cell BS including bUE device functionality include backhaul CT and the access traffic associated with the small cell BS including bUE device functionality is communicated over the
25 first BS backhaul CT or the small cell BS backhaul CT based on first parameters of the first BS backhaul CT or second parameters of the small cell BS backhaul CT. For at least one embodiment the first parameters or second parameters include one or more of bandwidth, latency, PER, jitter, QoS, cost, sponsoring, rebates. At least some embodiments of both Figure 2 and Figure 3 utilize these embodiments.

30

For at least one embodiment, the at least one data network (such as, data networks 241, 242) includes one or more of a wide area network, mobile core, core network, a company

network, carrier network, broadband network, internet. For at least one embodiment accessing a data service (for example video streaming, cloud back-up, SW update) over one or more data networks and one or more backhaul CT includes a common operator with improved control of parameters (for example latency, bandwidth, PER). This is typically the case for wireless service providers with carrier class backhaul CT (for example fiber CT, microwave CT, T1/E1) to mobile core or core networks. For at least one embodiment accessing a data service (for example video streaming, cloud back-up, SW update) over one or more data networks and one or more backhaul CT includes a plurality of operators with a plurality of control of parameters (for example latency, bandwidth, PER). This is typically the case for femtocell backhaul CT over a CT and data network operated by a DSL or cable modem service provider.

For at least one embodiment, the second communication technology includes one or more of broadband internet connectivity, wired communication technology, T1, E1, digital subscriber line (DSL), Data Over Cable Service Interface Specification (DOCSIS), cable modem, wireless communication technology, WiFi, WiMax, point to point (P2P) or point to multi-point (P2mP) microwave, fiber communication technology, 3G, 4G. For example the access or backhaul WCT may be one of 2G or 3G WCT and the backhaul CT may be a 4G CT). For at least one embodiment the bUE device may be a UE device (for example a smartphone or tablet or notebook) with one or more of 2G, 3G, 4G cellular access WCT and one or more of WiFi, Bluetooth, USB, Ethernet backhaul CT. For at least one embodiment the one or more of WiFi, Bluetooth, USB, Ethernet backhaul CT may be configured to connect to one or more of a WiFi access point, or a Ethernet LAN over a Bluetooth or a USB or Ethernet modem. Clearly many other permutations or combinations of one or more WCT and one or more backhaul CT are possible. For at least one embodiment the bUE device is a dedicated (or alternatively called a specialized or custom) device to improve the performance of the backhaul WCT link or backhaul CT link or the connection (for example by performing one or more of the following functions: collecting additional information, mapping, bridging, routing, network connecting, controlling) between the backhaul WCT and the backhaul CT. For example the dedicated bUE device may improve the backhaul WCT by improving hardware or software capability (for example increased transmit power, lower receiver noise figure, additional transmit or receiver antennas, higher antenna gain, improved link performance statistics gathering and exchange), by improving the installation or deployment of the bUE device for better signal quality parameters

(lower path loss, lower interference, etc.), by deploying the dedicated bUE device at a location with favorable backhaul CT parameters (for example at closer to a cable or DSL head-end for improved data communication performance) or by improving the connection between the backhaul WCT and the backhaul CT (for example by improved packet processing, protocol
5 conversion, header conversion, PER monitoring, ARQ handling, QoS mapping, etc.).

/*[C13] [14, 15] 100 series

For at least one embodiment, the BS 201 is further operative to obtain one or more first parameters associated with the wireless communication between one or more of the plurality of
10 bUE devices 210, 211 and the BS 201. Specifically, for at least one embodiment, the selection of the one or more of the plurality of bUE devices 210, 211 for the BH traffic is based on the first parameters. At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

15 In at least some embodiments selecting the bUE device (such as, one of bUE device 210, 211) is based on a bUE backhaul wireless communication technology (WCT) between the plurality of bUE devices 210, 211 and the BS 201. For example bUE device 210 may include a WCT 220 with large bandwidth (exemplary first parameter) (for example 4G or LTE) and bUE device 211 may include a WCT 231 with low PER (exemplary first parameter) (for example
20 2G/3G). For this example bUE device 210 may be better suited for a streaming video application and bUE device 211 may be better suited for a VoIP or gaming application. For example bUE device 210 may include a WCT 230 with a high SNR (exemplary first parameter) and bursty interference (exemplary first parameter) (for example 4G/LTE with aggressive frequency reuse resulting in high average throughput and high PER and frequent
25 retransmissions) and bUE device 211 may include a WCT 231 with low average and low variance CQI (channel quality information) (exemplary first parameter). For this example bUE device 210 may be better suited for video streaming and bUE device 211 may be better suited for VoIP application. In at least some embodiments the bUE device 210 may include a WCT 220 with low interference footprint (for example by using directional antennas or low transmission
30 power which results in lower interference to other surrounding WCT links) (exemplary first parameter), which could make it more desirable for selection. In at least some embodiments a WCT 220 DL (shown as a dashed arrow) parameters are more desirable than the WCT 221 DL

parameters and an UL access traffic (WCT 222) associated with UE 212 is network connected through bUE device 210. In at least some embodiments a WCT 220 UL (shown as a solid arrow) parameters are less desirable than the WCT 221 UL parameters and DL access traffic (WCT 222) associated with UE 212 is network connected through bUE device 211. For example WCT parameters relevant for selecting a bUE device based on bUE WCT include one or more of a link quality, link quality statistics, link quality variation, path loss, fading, shadowing, Signal to Noise Ratio (SNR), Signal to Interference and Noise Ratio (SINR), Packet Error Rate (PER), received interference, interference generated to other devices, Channel Quality Indicator (CQI), Channel State Information (CSI), Modulation and Coding Scheme (MCS), Precoding Matrix Indicator (PMI), rank indicator (RI), single user or multiuser Multiple Input Multiple Output (SU-MIMO or MU-MIMO) information.

/*[C16] [17, 18] 100 series

For at least one embodiment, the BS 201 is further operative to obtain one or more second parameters associated with the at least one data network (such as, data networks 241, 242) through at least the second communication technology. More specifically, for at least one embodiment, the selection of the one or more of the plurality of bUE devices 210, 211 for the BH traffic is based on the one or more second parameters. A non-exhaustive list of exemplary second parameters includes one or more of a link quality, bandwidth, throughput, cost, latency, jitter, QoS, PER.

In at least some embodiments selecting the bUE device is based on a bUE backhaul CT parameter (second parameter associated with second communication technology) between the plurality of bUE devices 210, 211 and one or more data networks. For example bUE device 210 may include a backhaul CT 230 with large bandwidth (exemplary second parameter) (for example cable modem) and bUE device 211 may include a backhaul CT 231 with low latency (exemplary second parameter) (for example T1). For this example bUE device 210 may be better suited for a streaming video application and bUE device 211 may be better suited for a VoIP or gaming application. For example bUE device 210 may include a backhaul CT 230 with a monthly data cap (exemplary second parameter) (for example cable modem) and bUE device 211 may include a backhaul CT 231 with unlimited data usage (exemplary second parameter) and high latency (exemplary second parameter) (for example a home DSL). For this example

bUE device 210 may be better suited for VoIP or gaming and bUE device 211 may be better suited for background data (for example SW updates or local content preloading) application.

/*[19, 20]

5 For at least one embodiment, the access traffic associated with the one or more UE devices (such as, UE device 212) is classified into two or more data flows based on a data flow parameter and the selection of the one or more plurality of bUE devices 210, 211 for the BH traffic is based in part on the data flow parameter. More specifically, for at least one embodiment, the data flow parameter includes one or more of a data flow bandwidth, latency,
10 Quality of Service (QoS), PER, UE device state, application, user state, cost, sponsoring, data plan. For at least one embodiment a UE device has a plurality of applications using communication resources over the access WCT and at least two data communications associated with the plurality of active applications have a common a data flow parameter within a tolerance threshold. For example a first data communication may be associated with a gaming application
15 with maximum latency of requirement parameter 5ms and a second data communication may be associated with a VoIP application with maximum latency requirement of 10ms and the classification is all data flow with latency requirements below 10ms. For at least one embodiment the data flow classification includes a plurality of parameters, for example bandwidth and latency, or bandwidth and cost, or QoS and cost. For at least one embodiment the
20 plurality of applications includes a plurality of UE devices. For example a first data communication associated with a first application associated with a first UE may be aggregated with a second data communication associated with a second application associated with a second UE when they first and second data communications based on a data flow parameter (for example the data flow parameter requirements are within a threshold tolerance).

25

/*[43+]100 series

Figure 3 shows an embodiment of the backhaul system wherein a BS 301 is further operable to communicate with at least one data network (such as, data network 340) over at least a third communication technology (for example Backhaul CT 332). For at least some
30 embodiments, the BS 301 is further operative to select the third communication technology for BH traffic, wherein the BH traffic of the third communication technology including access traffic from the one or more UE devices (such as, UE device 212).

/*[44-50] [Second independent claim and associated dependents] 100 series

5 An exemplary, non-exhaustive list of technology that can be utilized as the third communication technology include one or more of wired communication technology, T1, E1, DSL, DOCSIS, cable modem, wireless communication technology, WiFi, WiMax, P2P or P2mP microwave, fiber communication technology.

10 For at least some embodiments, the BS is further operative to obtain one or more third parameters associated with the at least one data network through at least the third communication technology. An exemplary, non-exhaustive list of parameters that can be utilized as the one or more third parameters includes one or more of a link quality, bandwidth, throughput, cost, latency, jitter, QoS, PER. For at least one embodiment, the third communication technology for BH traffic includes a carrier grade communication technology. For at least one embodiment, the
15 BH traffic of the third communication technology includes legacy access traffic. For at least one embodiment the BH traffic of the third communication technology includes legacy access traffic, wherein the legacy access traffic includes one or more of 2G access WCT traffic, 2G+3G access WCT traffic, low latency access WCT traffic. For at least one embodiment the BH traffic of the third communication technology includes low bandwidth or low latency access traffic, wherein
20 the access traffic includes one or more of 2G access traffic, 2G+3G access traffic, access traffic associated with voice or gaming applications or real time applications.

In at least some embodiments the BS 301 includes traditional backhaul (for example carrier grade or narrowband—such as a small number of T1 or E1) that is insufficient to satisfy
25 the access traffic demands of the plurality of UE (such as, UE 212). For example a BS 301 that is upgraded from 3G WCT to 3G+4G WCT may not have sufficient bandwidth to support the additional services or applications. For example the BS 301 may include a small number of T1 (for example based on legacy 2G or 3G requirements) that may be able to support latency or jitter or PER requirements (for example for a 2G or 3G cellular service) but may not be able to
30 support the bandwidth requirement of additional 4G services. For example a BS 301 may have been dimensioned for a small number of UE devices or UE devices with lower access traffic capability but over the deployment lifetime a growth in the number of UE devices or additional

enhanced access traffic generating capability UE device (for example smartphones or tablets) or additional services or applications on existing UE device may require additional demands on backhaul. In at least some embodiments the BS 301 requires a bUE device to network connect at least a portion of the access traffic (for example additional access traffic from new UE, services
5 or higher bandwidth WCT) to a data network over a bUE device and selecting between the traditional backhaul and the bUE device backhaul. In at least some embodiments the bUE device backhaul is used as an interim solution. In at least some embodiments the bUE device backhaul is used as an interim solution until additional traditional backhaul is available (for example while upgrading a BS backhaul from one or more of T1 to microwave or fiber communication
10 technology). For example a BS deployment with 2G or 2G+3G WCT may be been equipped with a small number of T1/E1, wherein the small number of T1/E1 is sufficient to satisfy an initial or legacy access traffic parameters/requirement (for example bandwidth and latency). For at least one embodiment additional backhaul CT performance (bandwidth, capacity, latency, etc.) is required (for example to included additional UE, additional services, additional UE with
15 enhanced requirements/capabilities, additional WCT—such as 4G) may be required at a later time, wherein the additional backhaul CT performance is achieved with assistance of one or more bUE device. For at least one embodiment the additional backhaul CT performance is achieved with assistance of one or more bUE device as in interim solution. For at least one embodiment the interim solution is used until the BS backhaul is upgraded (for example from a
20 small number of T1/E1 to a fiber CT—which may take several years to deploy/install). At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

/*[21, 22] 100 series

For at least one embodiment, the BS 201 (or 301) operative to aid in selecting the
25 transmission power level of at least one of the plurality of bUE devices 210, 211, or the one or more UE devices (such as, UE device 212) is assisted by a signal transmitted by the BS 201. More specifically, or at least one embodiment, the assisting by the signal transmitted by the BS 201 includes one or more of a control message from the BS 201, or a reference signal transmitted by the BS 201. At least some embodiments of both Figure 2 and Figure 3 can implement these
30 embodiments. For at least one embodiment the reference signal transmitted by the BS 201 includes one or more of a pilot, a synchronization sequence, a reference symbol, a training sequence, a data symbol, wherein one o more of the plurality of bUE devices or at least one of

the one or more UE devices may use to estimate a received signal strength and/or derive a transmission path loss from which the transmission power level may be selected (or alternatively estimated, derived, or refined). For at least one embodiment the BS 201 estimates a received signal strength (for example based on one or more of a pilot, a synchronization sequence, a reference symbol, a training sequence, a data symbol) from at least one of the plurality of bUE devices or at least one of the one or more UE and/or derives a transmission path loss from which a desired transmission power level for at least one of the bUE device or UE device may be selected. For at least one embodiment, information associated with the particular bUE device or UE device desired transmission power may be communicated to the particular bUE device or UE device over a control message from the BS 201.

/*[23, 24, 25, 26] 100 series

For at least one embodiment, a resource block includes a partition of a carrier or frequency channel for the wirelessly communicating. More specifically, for at least one embodiment, the partition includes one or more of a unit of time, a unit of frequency, a code. For an embodiment, the partition includes one or more of a time slot, a frequency band, a time-frequency allocation, a time-code allocation, a time-frequency-code allocation. At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

For at least one embodiment, the wireless communication between the plurality of bUE devices 210, 211 and the BS 201 is enhanced relative to the wireless communication between the BS 201 and at least one of the one or more UE devices (such as, UE device 212), wherein the enhanced wireless communication includes one or more of better antenna gain, more antennas, outdoor installation, better processing power, better transmit or receive analog or digital performance, lower transmit power, higher or outdoor installation, improved link parameters, improved number of antennas. For at least one embodiment the bUE devices are selected from the one or more UE devices based on enhanced (or alternatively higher performance or favorable) WCT parameters. For example the bUE device may be selected from the population of one or more UE devices based on better path loss (less path loss), higher MCS, lower PER. For at least one embodiment the bUE device may be dedicated devices with hardware or software functionality that results in better WCT parameters. For at least one embodiment the dedicated bUE device have better antennas (for example higher gain or more antennas), higher transmission power or lower receiver sensitivity or are installed at favorable locations relative to

the BS 201 (for example lower shadowing or higher K-factor channels). At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

/*[C27] [28, 29] 100 series

5 At least one embodiment further includes classifying and prioritizing the BH traffic based on the access traffic (for example access traffic is classified based on QoS parameters of the access traffic data or control payload and this information is mapped onto associated BH traffic), and wherein the RB scheduling information for the BH traffic is based on the BH traffic prioritization. At least one embodiment further includes classifying and prioritizing the access
10 traffic, wherein the RB scheduling information for the access traffic and the BH traffic is based on the access traffic prioritization and BH traffic prioritization. For example a DL scheduler may assign RBs to DL access traffic for a first UE and DL backhaul traffic for a bUE device which includes UL access traffic from a second UE (or the first UE) to be sent over the bUE device backhaul CT. For this example the DL scheduler RB assignments may be based on the
15 first UE DL access traffic classification and the DL backhaul traffic which is associated with second UE (or first UE) UL access traffic. For at least one embodiment, classifying the BH traffic includes best effort access traffic having a lower priority than classified access traffic having a delay QoS below a threshold. At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

20 In at least some embodiments the access traffic associated with a plurality of UE (such as, UE 212) is classified (for example based on delay QoS, best effort, DL, UL, foreground, background). In at least some embodiments the classified access traffic is aggregated (for example across a plurality of UE (such as, UE 212)). In at least some embodiments the classified aggregated traffic is assigned into queues prior to assigning of resource blocks for BH
25 traffic of at least one of the plurality of bUE devices. For example the VoIP access traffic from the plurality of UE (such as, UE 212) could be assigned to one VoIP queue and based on the plurality of bUE WCT or CT parameters this queue may be carried by a selected bUE device.

/*[30] [31, 32, 33, 34] 100 series

For at least one embodiment, a bUE device selection of one or more of the plurality of
30 bUE devices 210, 211 is based on one or more first parameters of the wireless communication

between the bUE device and the BS 201 or one or more second parameters of associated with at least one data network through at least the second communication technology. For example bUE devices 210, 211 may be selected from a larger pool of available bUE devices for providing backhaul traffic functionality or alternatively bUE devices 210, 211 may have been deployed at

5 desirable locations based on favorable WCT parameters (for example near a BS or with favorably channel parameters—for example one or more of low loss, low interference, etc.) or backhaul CT parameters (for example near a fiber CT with high bandwidth and low latency or near a microwave CT with line of sight--LOS). More specifically, for at least one embodiment, the bUE device deployment selection includes one or more of selecting a bUE device

10 deployment configuration, selecting a bUE type, selecting a bUE configuration, selecting a bUE device installation positioning, selecting a bUE site. More specifically, for at least one embodiment, the first parameter of the bUE device selection is based on a joint first parameter between at least two of the plurality of bUE devices 210, 211. More specifically, for at least one embodiment, the joint first parameter enables joint or simultaneous wireless communication on a

15 shared resource block (RB) of at least two of the plurality of bUE devices 210, 211. For a more specific embodiment, the joint or simultaneous wireless communication includes one or more of multi user (MU)-MIMO, successive interference cancelling (SIC), multilevel constellation and/or modulation. For at least one embodiment the BS (for example 201 or 301) includes a plurality of antennas (for example for transmission or reception) and in combination with the at

20 least two of the plurality of bUE devices generate a matrix wireless communication channel between the BS and the at least two of the plurality of bUE devices. For this embodiment the matrix channel may support at least two simultaneous transmissions over the same RB based on a channel parameter. For at least one embodiment the channel parameter includes a channel matrix rank. For at least one embodiment the channel parameter includes a plurality of singular

25 values (or alternatively eigenvalues or eigen-directions or some other property of the matrix channel that may assists in quantifying a number of simultaneous transmissions). For at least one embodiment the channel parameter includes a parameter greater than a threshold (for example the number of singular values above a threshold—for example singular values that are at least 2 times larger than the background one or more of noise or interference or distortion).

30 For at least one embodiment the plurality of bUE devices (for example 210, 211) are selected based channel matrix parameters between one or more subsets of the plurality of bUE devices (for example at least a minimum number of subsets of size 2 of bUE devices selected from the

plurality of bUE devices including channel matrix of rank 2 when combined with a BS with at least 2 antennas or at least a minimum number of subsets of size 3 of bUE devices having rank 3 when combined with a BS with at least 3 antennas). For at least one embodiment the matrix channel parameter includes information associated with one or more of multi user (MU)-MIMO, successive interference cancelling (SIC), multilevel constellation and/or modulation. For at least one embodiment at least one of the plurality of bUE devices are selected to enable simultaneous wireless communication between the BS with the at least one bUE device and at least one UE of the plurality of UE.

In at least some embodiments one or more of the plurality of UE devices (such as, UE device 212), in addition to a first CT for communication with the BS 201, include a second CT (for example 3G WCT combined with 4G CT or cellular WCT combined WiFi CT or cellular WCT combined with Bluetooth or USB or Ethernet CT, etc.) and based on the parameters associated with the second CT, one of the one or more UE may be operated (or alternatively selected or converted or chosen for consideration) to a bUE device (for example provisioned or dynamically). In at least some embodiments the bUE devices are dedicated (for example a specialized bUE device) for network connecting access traffic over backhaul. In at least some embodiments the dedicated bUE device includes improved WCT parameters (for example higher antenna gain, higher transmit power, lower received noise figure) relative to a majority of the plurality of UE devices. In at least some embodiments the bUE devices are deployed under favorable conditions (for example installed at a higher location, or lower mobility/fixed, pointed in the direction of improved link quality, installed at a location with lower shadowing or lower path loss, etc.) relative to a majority of the plurality of UE device. In at least some embodiments better bUE device deployment improves the efficiency of the backhaul WCT link (for example more efficient modulation and coding scheme (MCS)) or lower interference to other links. At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

/*[35, 36, 37] 100 series

Figure 4 shows another embodiment of a backhaul system. For this embodiment, the plurality of bUE devices (such as, bUE devices 410b, 411b) are selected such that at least one of the one or more UE devices (such as, UE devices 410a, 411a) has an associated bUE device, thereby enabling joint or simultaneous wireless communication (for example backhaul wireless communication technologies (WCT) 422 and 423 and access wireless communication

technologies (WCT) 421 and 424) over one or more shared resource blocks (RB). For at least one embodiment, the joint wireless communication over the one or more shared RB includes joint wireless communication utilizing one or more of communication separable in space, multilevel constellation, transmitter pre-coding or receiver separation. For at least some

5 embodiments, the at least one of the plurality of bUE devices 410b, 411b includes a plurality of transmit antennas, wherein the at least one bUE device includes more transmit antennas than the one or more UE devices 410a, 411a the at least one bUE device is associated with, or at least one of the plurality of bUE devices includes a plurality of receive antennas, wherein the at least one bUE device includes more receive antennas than the one or more UE devices the at least one

10 bUE device is associated with. At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

/*[C35] 100 series

In at least some embodiments a access WCT (for example 421 and 424) and a BH WCT

15 (for example 422 and 423) may be operated simultaneously for improved usage of the WCT resources (for example improved spectral efficiency, lower interference, joint RB utilization). For example space division multiple access (SDMA), beamforming (BF), multiple input multiple output (MIMO), successive interference cancelling (SIC), transmit precoding (TP), dirty paper coding (DPC) may be enabled between a BS and at least two clients (for example a bUE device

20 and a UE or two bUE devices or two UE devices) over a shared resource (for example a shared time-frequency resource block). In at least some embodiments an UL RB may be shared between access WCT 421 link and backhaul WCT 423 link (for example using multiuser-MIMO or BF or SIC). For at least one embodiment the BS (for example 201 or 301) includes a plurality of antennas (for example for transmission or reception) and in combination with the at least one of

25 the plurality of bUE devices (for example bUE device 410b) and one of the plurality of UE (for example UE 410a) generate a matrix wireless communication channel between the BS and the at least two of the plurality of bUE devices (for example based on access WCT 421 link and backhaul WCT 423 link). For this embodiment the matrix channel may support at least two simultaneous transmissions over the same RB based on a channel parameter. For at least one

30 embodiment the channel parameter includes a channel matrix rank. For at least one embodiment the channel parameter includes a plurality of singular values (or alternatively eigenvalues or eigen-directions or some other property of the matrix channel that may assists in quantifying a

number of simultaneous transmissions). For at least one embodiment the channel parameter includes a parameter greater than a threshold (for example the number of singular values above a threshold—for example singular values that are at least 2 times larger than the background one or more of noise or interference or distortion). For at least one embodiment the plurality of bUE
5 devices (for example bUE devices 410b, 411b) are selected based channel matrix parameters between one or more subsets of the plurality of bUE devices combined with one or more of the plurality of UE devices (for example at least a minimum number of subsets of size 2 of a bUE device selected from the plurality of bUE devices combined with a UE device including channel matrix of rank 2 when communicating with a BS with at least 2 antennas). For at least one
10 embodiment the matrix channel parameter includes information associated with one or more of multi user (MU)-MIMO, successive interference cancelling (SIC), multilevel constellation and/or modulation. For at least one embodiment at least one of the plurality of bUE devices are selected to enable simultaneous wireless communication between the BS with the at least one bUE device and at least one UE of the plurality of UE. In at least some embodiments the
15 backhaul WCT 423 link has better parameters than the WCT 421 link over shared resource and a lower transmit power is transmitted from bUE device 410b than UE device 410a. In at least some embodiments a DL RB may be shared between access WCT 424 link and backhaul WCT 422 link. In at least some embodiments the backhaul WCT 424 link has better parameters (for example bUE device 411b has additional antennas or additional receiver processing for shared
20 signal separation) than the WCT 422 link over the shared resource and a lower receiver complexity is required from UE 411a. In at least some embodiments improved BH WCT of bUE device is based on one or more of additional transmit or receive antennas, higher antenna gain, better deployment, bUE device selection, lower transmit power enabled deployment of backhaul with small degradation in WCT efficiency relative to a traditional backhaul. At least some
25 embodiments of both Figure 2 and Figure 3 can implement these embodiments.

/*[31 - 36] 100 series

For at least some embodiments, the BS 201 (or alternatively BS 301) is one of a plurality of BSs, wherein the plurality of BSs are each assigned one or more frequency channels based on
30 a soft frequency reuse (SFR) scheme with at least a low transmit power level and a high transmit power level, and wherein at least one of the plurality of bUE devices are assigned a resource block (RB) at the low transmit power level. For at least some embodiments, the BS 201 (or

alternatively BS 301) is one of a plurality of BSs, wherein the plurality of BSs are each assigned one or more frequency channels based on a soft frequency reuse (SFR) scheme with at least a low transmit power level and a high transmit power level, and wherein a majority (for example greater than 50%) of the plurality of bUE devices are assigned a resource block (RB) at the low transmit power level. For at least some embodiments, the BS 201 is one of a plurality of BSs, wherein the plurality of BSs are each assigned one or more frequency channels based on a fractional frequency reuse (FFR) scheme with at least a first frequency reuse scheme and a second frequency reuse scheme, the first frequency reuse scheme including a higher frequency reuse (or alternatively higher frequency efficiency usage) than the second frequency reuse scheme and wherein at least one of the plurality of bUE devices 210, 211 are assigned a resource block (RB) having the first frequency reuse or at least one of the one or more UE devices are assigned a resource block (RB) having a second frequency reuse. For at least some embodiments, the BS 201 is one of a plurality of BSs, wherein the plurality of BSs are each assigned one or more frequency channels based on a fractional frequency reuse (FFR) scheme with at least a first frequency reuse scheme and a second frequency reuse scheme, the first frequency reuse scheme including a higher frequency reuse (or alternatively higher frequency efficiency usage) than the second frequency reuse scheme and wherein a majority (for example greater than 50%) of the plurality of bUE devices (for example 210, 211) are assigned a resource block (RB) having the first frequency reuse or at least one of the one or more UE devices are assigned a resource block (RB) having a second frequency reuse. For at least one embodiment the bUE devices are one or more of selected (for example from a plurality of UE) or provisioned (for example a transmit power setting) or deployed (for example based on a frequency reuse plan) or installed (for example an installation height or pointing angle) to enable a majority of bUE devices to be assigned a RB at the low transmit power level of a SFR and/or first frequency reuse (higher efficiency) of a FFR. At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

For at least some embodiments, a first bUE device of the plurality of bUE devices 210, 211 is assigned a wireless communication uplink (UL) resource block (RB) for BH traffic and a second bUE device of the plurality of bUE devices is assigned a downlink (DL) RB for BH traffic. For at least one embodiment a first bUE device includes a backhaul CT with desirable DL parameters (for example wide bandwidth—for example VSDL) for an application on a UE

device requiring DL access and a second bUE device includes a backhaul CT with desirable UL parameters (for example low latency --for example carrier T1) for an application requiring UL access (for example a real-time video download—DL--with ACKs--UL). For at least one embodiment a first bUE device of the plurality of bUE devices 210, 211 is assigned a wireless communication uplink (UL) resource block (RB) for BH traffic and a second bUE device of the plurality of bUE devices is assigned a downlink (DL) RB for BH traffic to enable joint or simultaneous transmission (for example shared RB) between the first bUE device and a first UE device in the UL and between the second bUE device and a second UE device in the DL. For at least one embodiment a first bUE device of the plurality of bUE devices 210, 211 is assigned a wireless communication uplink (UL) resource block (RB) for BH traffic and a second bUE device of the plurality of bUE devices is assigned a downlink (DL) RB for BH traffic to assist in balancing wireless communication resources (for example RB) between the access WCT and backhaul WCT usage of the wireless communication resources.

For at least some embodiments, at least a first bUE device of the plurality of bUE devices 210, 211 transmits or receives access traffic associated with the first bUE device. For at least one embodiment the first bUE device (for example 210) communicates self-generated access traffic over the backhaul CT (for example 230). For at least one embodiment the first bUE device (for example 210) communicates self-generated access traffic over the WCT (for example 220) through the BS (for example BS 201). For at least one embodiment the first bUE device (for example 210) communicates self-generated access traffic over the backhaul CT (for example 230) or over the WCT (for example 220) through the BS (for example BS 201) based on an access traffic parameter (for example latency or bandwidth).

For at least some embodiments, a first bUE device is dynamically added to or deleted from the plurality of bUE devices 210, 211 based on one or more first parameters associated with the wireless communication between the first bUE device and the BS 201 or one or more second parameters associated with the at least one data network through at least the second communication technology associated with the first bUE device. For at least one embodiment a particular bUE device is dynamically added to the plurality of bUE devices 210, 211 based on one or more first parameters associated with the wireless communication between the first bUE device and the BS 201 relative to a threshold (for example a particular bUE device could be

added to the plurality of bUE devices when the SNIR exceeds a threshold, or a MCS exceeds a threshold, or a link quality variation is below a threshold). For at least one embodiment a particular bUE device is dynamically deleted from the plurality of bUE devices 210, 211 based on one or more first parameters associated with the wireless communication between the first
5 bUE device and the BS 201 relative to a threshold (for example a particular bUE device could be deleted from the plurality of bUE devices when the SNIR drops below a threshold, or a transmit power exceeds a threshold, or a PER is above a threshold). At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

10 For at least some embodiments, the BS 201 is further operative to select at least a first bUE device of the plurality of bUE devices 210, 211 for backhaul (BH) traffic, wherein the BH traffic includes access traffic from a second bUE device of the plurality of bUE devices 210, 211.

For at least some embodiments, a first bUE device of the plurality of bUE devices 210,
15 211 is assigned a first channel, and a second bUE device of the plurality of bUE devices 210, 211 is assigned a second channel. For at least one embodiment one of the plurality of UE devices access WCT is assigned to the first or second channel. For at least one embodiment one of the plurality of UE devices access WCT is assigned to the first or third channel.

20 For at least some embodiments, the selection of the one or more of the bUE devices 210, 211 is based on evaluating, obtaining and/or classifying a characteristic or parameter of the access, payload, communication, or data flow of the at least one UE device (such as, UE device 212) and the BS 201. At least some embodiments of both Figure 2 and Figure 3 can implement these embodiments.

25

/*200 Series:

/*[C1] 200 Series

Figure 5 shows another backhaul system, according to an embodiment. For this embodiment, the system includes a first base station (BS) 510, one or more backhaul user
30 equipment (bUE) devices (such as, bUE device 522), the one or more bUE devices 522 operable to wirelessly communicate with the first BS 510 through at least a first communication technology (for example wireless communication technology (WCT) 531), and the one or more

bUE devices 522 operable to communicate with at least one data network (such as, data network 551) through at least a second communication technology (for example backhaul communication technology (CT) 541), and a second base station (BS) 500 operable to wirelessly communicate (for example through backhaul WCT 530) with the first BS 510, the second BS 500 further
5 operable to communicate with a second data network (such as, data network 550 through backhaul CT 540). For this embodiment, the first BS 510 is operative to wirelessly communicate (for example access WCT 534) with one or more user equipment (UE) devices (such as, UE device 521), and network connect the one or more UE devices 521 to the at least one data network 551 or the second data network 550 through at least one of the one or more bUE devices
10 522 or the second BS 500, select at least one of the one or more bUE devices 522 or the second BS 500 for backhaul (BH) traffic, wherein the BH traffic includes access traffic from the one or more UE devices 521, aid in selecting the transmission power level of at least one of the one or more bUE devices 522, or at least one of the one or more UE devices 521, and transmit resource block (RB) scheduling information for the BH traffic transmission of at least one of the one or
15 more bUE devices 522 and the access traffic of at least one of the one or more UE devices 521. An exemplary second UE device 520 is shown connected to the second BS 500 through access WCT 533. In at least some embodiments, the second BS 500 shares wireless communication resources (for example one or more frequency bands or one or more frequency channels or one or more resource blocks) between the backhaul WCT 530 and the access WCT 533 for access
20 traffic associated with UE device 520.

In at least some embodiment the first BS 510 assigns at least a portion of the access traffic to be communicated over the BH WCT 530 connection between the first BS and the second BS. In at least some embodiment, the first BS includes a Relay Node. In at least some
25 embodiments, the first BS 510 may communicate all of the access traffic associated with the first BS's associated UE (for example UE device 521) through backhaul WCT 530. In at least some embodiments, BH WCT 530 includes a scarce or shared or expensive wireless resource (such as 3G/4G wireless spectrum) or generates interference to other BS or UE device (for example access WCT 533 or access WCT 534). In at least some embodiments, the access traffic
30 associated with one of the one or more UE device associated with first BS 510 (for example UE device 521) includes a plurality of services or applications with one or more backhaul requirements (for example one or more of latency, bandwidth, QoS, PER, cost, a data usage cap,

etc.). In at least some embodiments, at least one of the one or more backhaul requirements of a service or application generating access traffic exceed the backhaul parameters of BH WCT 530 (for example cost or bandwidth). In at least some embodiments, one or more of the backhaul parameters of BH WCT 530 exceed the requirements of services or applications of the one or
5 more UE device (for example UE device services or applications may include background data or best effort data). In at least some embodiments, it may be desirable to add (for example deploy a bUE device or select and/or reconfigure a particular UE device from the one or more UE device) a bUE device and selecting between the BH WCT 530 associated with BS 500 and BH WCT 531 associated with the bUE device 522 for backhauling access traffic from UE device
10 521. For example BH WCT 531 may include one or more of a first cost, a first latency, first interference, first bandwidth to a data network 551, and the BH WCT 530 to second data network 550 over BH CT 540 may include one or more of a second cost, a second latency, second interference, second bandwidth to a data network 551. In at least some embodiments, the first cost of BH WCT 531 is lower than a second cost of BH WCT 530 and services or
15 applications requiring low cost are communicated over BH WCT 531 (for example streaming video). In at least some embodiments, the first latency of BH WCT 531 is higher than a second latency of BH WCT 530 and services or applications requiring low latency are communicated over BH WCT 530 (for example VoIP).

20 In at least some embodiments, the BH CT 540 to data network 550 is a carrier core network (for example carrier class), but is low bandwidth or expensive (for example a few T1) . In at least some embodiments, the BH to data network 551 through bUE device 522 is over a consumer grade (for example DSL or cable modem) network. In at least some embodiments, latency sensitive access traffic is carried over BH WCT 530. In at least some embodiments, BH
25 WCT 531 through bUE device 522 is selected based on one or more of peak traffic events or to communicate overflow traffic or offload traffic or best effort traffic or background access traffic.

/*[C2 – C20] 200 series

For at least some embodiments the first BS 510 includes one or more of a cellular BS or a
30 Relay Node (RN).

For at least some embodiments the one or more bUE devices (such as, bUE device 522) wirelessly communicate with the first BS 510 over one or more of wireless communication technologies (WCT 531), wherein the one or more wireless communication technologies include at least one of WiFi, WiMax, 3G, 4G, LTE, Orthogonal frequency division multiple access (OFDMA), Wideband code division multiple access (WCDMA).

For at least some embodiments the one or more UE devices (such as, UE device 521) wirelessly communicate (WCT 534) with the first BS 510 over one or more of wireless communication technologies, wherein the one or more wireless communication technologies include at least one of WiFi, WiMax, 3G, 4G, LTE, OFDMA, WCDMA.

For at least some embodiments the one or more UE devices (such as, UE device 521) wirelessly communicate with the first BS 510 and the one or more bUE devices (such as, bUE device 522) wirelessly communicate with the first BS 510 utilizing a same wireless communication technology (that is, WCT 531 and WCT 534 are the same). More specifically, for at least some embodiments the one or more UE devices (such as, UE device 521) wirelessly communicate with the first BS 510, and the one or more bUE devices (such as, bUE device 522) wirelessly communicate with the first BS 510 utilizing the same wireless communication technology and a shared one or more frequency channels.

For at least some embodiments the at least one of the one or more UE devices (such as, UE device 521) or at least one of the one or more bUE devices (such as, bUE device 522) includes one or more of a fixed client terminal, mobile terminal, a user terminal, an access terminal, a consumer premises equipment. For at least some embodiments the at least one of the one or more UE devices or at least one of the one or more bUE devices (such as, bUE device 522) includes one or more of a cellular phone, a smart phone, a notebook, a laptop, a tablet, or a PC.

For at least some embodiments the at least one of the one or more bUE devices (such as, bUE device 522) is at least one of associated with or a part of a small cell BS, wherein the small cell BS includes client side modem functionality. More specifically, for at least some

embodiments the small cell BS includes one or more of a microcell, a picocell, a relay node, a femtocell.

For at least some embodiments the at least one data network includes one or more of a
5 wide area network, mobile core, core network, a company network, carrier network, broadband network, internet.

For at least some embodiments the second communication technology includes one or more of broadband internet connectivity, wired communication technology, T1, E1, digital
10 subscriber line (DSL), Data Over Cable Service Interface Specification (DOCSIS), cable modem, wireless communication technology, WiFi, WiMax, 4G, point to point (P2P) or point to multi-point (P2mP) microwave, fiber communication technology (for example 4G carrying 3G/2G).

For at least some embodiments the first BS 510 is further operative to obtain one or more
15 first parameters associated with the wireless communication (such as, WCT 531) between at least one of the one or more bUE devices (such as, bUE device 522) and the first BS 510. More specifically, for at least some embodiments the selection of the at least one of the one or more bUE devices (such as, bUE device 522) for the BH traffic is based on the one or more first
20 parameters. For at least some embodiments the one or more first parameters includes one or more of a link quality, link quality statistics, link quality variation, path loss, fading, shadowing, Signal to Noise Ratio (SNR), Signal to Interference and Noise Ratio (SINR), Packet Error Rate (PER), received interference, interference generated to other devices, Channel Quality Indicator (CQI), Channel State Information (CSI), Modulation and Coding Scheme (MCS), Precoding
25 Matrix Indicator (PMI), rank indicator (RI), single user or multiuser Multiple Input Multiple Output (SU-MIMO or MU-MIMO) information.

For at least some embodiments the first BS 510 is further operative to obtain one or more
second parameters associated with the at least one data network (such as data network 510
through at least the second communication technology. More specifically, for at least some
30 embodiments the selection of the at least one of the one or more bUE devices (such as, bUE device 522) for the BH traffic is based on the one or more second parameters. An exemplary,

non-exhaustive list of second parameters includes one or more of a link quality, bandwidth, throughput, cost, latency, jitter, QoS, PER.

For at least some embodiments the access traffic associated with the one or more UE devices (such as, UE device 521) is classified into two or more data flows based on a data flow parameter and the selection of at least one of the one or more bUE devices (such as, bUE device 522) for the BH traffic is based in part on the data flow parameter. For at least some embodiments the data flow parameter includes one or more of a data flow bandwidth, latency, Quality of Service (QoS), PER, UE device state, application, user state, cost, sponsoring, data plan.

/*[C28-C36] 200 series

For at least some embodiments the first BS 510 operative to aid in selecting the transmission power level of at least one of the one or more bUE devices (such as, bUE device 522), or the one or more UE devices (such as, UE device 521) is assisted by a signal transmitted by the first BS 510. For at least some embodiments the assisting by the signal transmitted by the first BS 510 includes one or more of a control message from the first BS 510, or a reference signal transmitted by the first BS 510.

For at least some embodiments a resource block includes a partition of a carrier or frequency channel for the wirelessly communicating. For at least some embodiments the partition includes one or more of a unit of time, a unit of frequency, or a code. For at least one other embodiment, the partition includes one or more of a time slot, a frequency band, a time-frequency allocation, a time-code allocation, a time-frequency-code allocation.

For at least some embodiments the wireless communication between the one or more bUE devices (such as, bUE device 522) and the first BS 510 is enhanced relative to the wireless communication between the first BS 510 and at least one of the one or more UE devices (such as, UE device 521), wherein the enhanced wireless communication includes one or more of better antenna gain, more antennas, outdoor installation, better processing power, better transmit or receive analog or digital performance, lower transmit power, higher or outdoor installation, improved link parameters, improved number of antennas.

At least some embodiments further include classifying and prioritizing the BH traffic based on the access traffic, and wherein the RB scheduling information for the BH traffic is based on the BH traffic prioritization. At least some embodiments further include classifying and prioritizing the access traffic, wherein the RB scheduling information for the access traffic and the BH traffic is based on the access traffic prioritization and BH traffic prioritization. More specifically, at least some embodiments include classifying the BH traffic including best effort access traffic having a lower priority than classified access traffic having a delay QoS below a threshold.

/*[C42-C51] 200 series

At least some embodiments further includes selecting the one or more bUE devices (such as, bUE device 522) such that at least one of the one or more UE devices (such as, UE device 521) has an associated bUE device, thereby enabling joint or simultaneous wireless communication over one or more shared resource blocks (RB). At least some embodiments further includes selecting the one or more bUE devices (such as, bUE device 522) such that a majority of the one or more UE devices (such as, UE device 521) has an associated bUE device, thereby enabling joint or simultaneous wireless communication over one or more shared resource blocks (RB). For at least some embodiments, the joint wireless communication over the one or more shared RB includes joint wireless communication utilizing one or more of communication separable in space, multilevel constellation, transmitter pre-coding or receiver separation. For at least some embodiments the at least one of the one or more bUE devices (such as, bUE device 522) includes a plurality of transmit antennas, wherein the at least one bUE device includes more transmit antennas than the one or more UE devices (such as, UE device 521). For at least some embodiments, the at least one of the one or more bUE devices (such as, bUE device 522) includes a plurality of transmit antennas, wherein the at least one bUE device includes more transmit antennas than the majority (for example 50% or more) of the one or more UE devices (such as, UE device 521). For at least some embodiments a majority (for example 50% or more) of the one or more bUE devices (such as, bUE device 522) includes a plurality of transmit antennas, wherein the majority of the one or more bUE device includes more transmit antennas than the majority (for example 50% or more) of the one or more UE devices (such as, UE device 521). For at least some embodiments the at least one of the one or more bUE devices (such as, bUE device 522) includes a plurality of receiver antennas, wherein the at least one bUE device includes more receiver antennas than the one or more UE devices (such as, UE device 521). For

at least some embodiments the at least one of the one or more bUE devices (such as, bUE device 522) includes a plurality of receiver antennas, wherein the at least one bUE device includes more receiver antennas than the majority (for example 50% or more) of the one or more UE devices (such as, UE device 521). For at least some embodiments a majority (for example 50% or more) of the one or more bUE devices (such as, bUE device 522) includes a plurality of receiver antennas, wherein the majority of the one or more bUE device includes more receiver antennas than the majority (for example 50% or more) of the one or more UE devices (such as, UE device 521).

10 In at least one embodiment, the at least one bUE device is associated with at least one of the one or more UE devices (such as, UE device 521) includes a plurality of transmit (or alternatively receive) antennas, wherein the at least one bUE device includes more transmit (or alternatively receive) antennas than the one or more UE devices (such as, UE device 521) the at least one bUE device is associated with.

15 For at least some embodiments the first BS 510 is one of a plurality of BSs, wherein the plurality of BSs are each assigned one or more frequency channels based on a soft frequency reuse (SFR) scheme with at least a low transmit power level and a high transmit power level, and wherein at least one of the one or more bUE devices (such as, bUE device 522) are assigned a resource block (RB) at the low transmit power level. For at least some embodiments the first BS 20 510 is one of a plurality of BSs, wherein the plurality of BSs are each assigned one or more frequency channels based on a soft frequency reuse (SFR) scheme with at least a low transmit power level and a high transmit power level, and wherein at least a majority (for example 50% or more) the one or more bUE devices (such as, bUE device 522) are assigned a resource block (RB) at the low transmit power level.

For at least some embodiments the first BS 510 is one of a plurality of BSs, wherein the plurality of BSs are each assigned one or more frequency channels based on a fractional frequency reuse (FFR) scheme and wherein at least one of the one or more bUE devices (such as, bUE device 522) are assigned a resource block (RB) having a higher frequency reuse than a resource block (RB) assigned to the one or more UE devices (such as, UE device 521). For at 30 least some embodiments the first BS 510 is one of a plurality of BSs, wherein the plurality of

BSs are each assigned one or more frequency channels based on a fractional frequency reuse (FFR) scheme and wherein at least a majority (for example 50% or more) of the one or more bUE devices (such as, bUE device 522) are assigned a resource block (RB) having a higher frequency reuse than a resource block (RB) assigned to the one or more UE devices (such as, UE device 521).

For at least one embodiment, the one of more bUE devices includes a plurality of bUE devices, and wherein a first bUE device of the plurality of bUE devices is assigned a wireless communication uplink (UL) resource block (RB) for BH traffic and a second bUE device of the plurality of bUE devices assigned a downlink (DL) RB for BH traffic.

For at least one embodiment, at least a first bUE device of the one or more bUE devices (such as, bUE device 522) transmits or receives access traffic associated with the first bUE device (for example self-generated access traffic form services or applications associated with the bUE device). For at least one embodiment a first bUE device is dynamically added to or deleted from the one or more bUE devices (such as, bUE device 522) based on one or more first parameters associated with the wireless communication between the first bUE device and the first BS 510 or one or more second parameters associated with the at least one data network through at least the second communication technology associated with the first bUE device.

20

For at least one embodiment, the first BS 510 is further operative to select at least a first bUE device of the one or more bUE devices (such as, bUE device 522) for backhaul (BH) traffic, wherein the BH traffic includes access traffic from at least a second bUE device of the one or more bUE devices (such as, bUE device 522).

25

Figure 6 shows another backhaul system, according to an embodiment. This embodiment further includes multiple bUE devices 522, 623, wherein a first bUE device 522 operable to communicate with at least one data network (such as, data network 551) through at least a second communication technology (such as backhaul CT 541), and second bUE device 623 is operable to communicate with at least one data network (such as, data network 652) through, for example, backhaul CT 642. At least some embodiments of both Figure 2 and Figure 4 (which

30

include a plurality of bUE devices) may be utilized for the embodiments related (or alternatively associated with or in conjunction with or jointly with or to enhance) to Figure 6.

/*[C37-C41] 200 series

5 For at least some embodiments, the selecting at least one of the one or more bUE devices (such as, bUE devices 522, 623) is based on one or more first parameters associated with the wireless communication between the one or more bUE devices (such as, bUE devices 522, 623) and the first BS 510 or one or more second parameters associated with one or more first data network through at least one or more second communication technology. For at least one
10 embodiment, the selection at least one of the one or more bUE devices (such as, bUE devices 522, 623) includes one or more of selecting a deployment, selecting a type, selecting a configuration, selecting an installation, selecting a site. For at least one embodiment, the one of more bUE devices (such as, bUE devices 522, 623) includes a plurality of bUE devices (such as, bUE devices 522, 623), and wherein the first parameter of the bUE selection is based on a joint
15 first parameter between at least two of the plurality of bUE devices (such as, bUE devices 522, 623). For at least one embodiment the joint first parameter enables joint or simultaneous wireless communication on a shared resource block (RB) of at least two of the plurality of bUE devices (such as, bUE devices 522, 623). For at least one embodiment the joint or simultaneous wireless communication includes one or more of multi user (MU)-MIMO, successive
20 interference cancelling (SIC), multilevel constellation/modulation.

In at least one embodiment, the backhaul system in Figure 5 is improved as shown in the backhaul system Figure 6 by including an additional bUE device (for example bUE device 623). For example access traffic associated with UE device 521 could be selected between backhauling
25 paths BH WCT 530, BH WCT 531 and BH WCT 632 based on one or more of the WCT parameters (for example spectrum efficiency, throughput, PER, received or generated interference, channel variation, mobility, handoff) or the one or more BH CT parameters (for example latency, bandwidth, PER, jitter) of BT CT (such as 540, 541, 642), associated with one or more data networks (such as 550, 551, 652). In at least some embodiments, the one or more
30 data networks 540, 541, 642 may be the same network. In at least some embodiments, two out of the 3 networks 540, 541, 642 may be the same network. In at least some embodiments, the one or more data networks 540, 541, 642 may be the same or different networks. In at least

some embodiments, selecting a backhaul path between a plurality of bUE devices enables (or improves) sharing (or joint or simultaneously) of WCT resources between the bUE device and the UE device (SDMA, BF, MU-MIMO, SIC). In at least some embodiments, backhaul selecting between a plurality of bUE devices enables higher spectrum utilization (higher MCS utilization, better frequency reuse, improved FFR, improved SFR, lower interference, lower transmit power).

Figure 7a shows another backhaul system, according to an embodiment. For this embodiment, the first BS 510 is further operable to communicate with at least a third data network (such as, data network 752) over at least a third communication technology (backhaul CT 742). For at least some embodiments, the third communication technology includes one or more of wired communication technology, T1, E1, DSL, DOCSIS, cable modem, wireless communication technology, WiFi, WiMax, P2P or P2mP microwave, fiber communication technology. For an embodiment, the first BS 510 is further operative to select the third communication technology for BH traffic, wherein the BH traffic of the third communication technology including access traffic from the one or more UE devices 521. For an embodiment, the first BS 510 is further operative to obtain one or more third parameters associated with the at least one data network (such as, data network 752) through at least the third communication technology. For at least some embodiments, the one or more third parameters includes one or more of a link quality, bandwidth, throughput, cost, latency, jitter, QoS, PER.

/*[C21 – C25 above] 200 series

/*[C26, C27] 200 series

For at least some embodiments, the third communication technology for BH traffic includes a carrier grade communication technology (for example, fiber CT, T1, wireless microwave). For at least some embodiments, the BH traffic of the third communication technology includes legacy access traffic.

Figure 7b shows another backhaul system, according to an embodiment. It is to be noted that the embodiment as shown does not include any bUE devices. This system includes a first base station (BS) 510. A second base station (BS) 500 is operable to wirelessly communicate with the first BS 510. The second BS 500 is further operable to communicate with a second data network 550. Further, the first BS 510 is operative communicate with at least a third data

network over at least a third communication, to wirelessly communicate with one or more user equipment (UE) devices (such as, UE device 521), and network connect the one or more UE devices (such as, UE device 521), to at least the third data network 752 or to the second data network 550 through the second BS, select at least one of the third data network over at least a
5 third communication technology or the second data network through the second BS for backhaul (BH) traffic, wherein the BH traffic includes access traffic from the one or more UE devices, aid in selecting the transmission power level of at least one of the one or more UE devices, and transmit resource block (RB) scheduling information for the BH traffic transmission of at least one of the second BS for BH traffic and the access traffic of at least one of the one or more UE
10 devices.

/*[C20] 200 series

Figure 7a shows another backhaul system, according to an embodiment. BS 510 may include BH CT to a data network 752. For example BH CT 742 may include one or more carrier
15 class T1/E1 which provide one or more of low bandwidth, low latency, high cost and legacy data communications. In at least some embodiments, BS 510 also includes BH WCT 530 and BH WCT 531. In at least some embodiments, BH CT 742 has lowest latency followed by BH WCT 530 and then BH WCT 531. In at least some embodiments, BH WCT 531 has highest bandwidth, followed by BH WCT 530 and then BH CT 742. Based on the last two sentences
20 access traffic associated to low latency low bandwidth services or applications (such as VoIP or gaming) may be assigned to BH CT 742, access traffic associated to best effort and large bandwidth services or applications (such as video streaming, SW download, file sharing, cloud backup) may be assigned to BH CT 531. In at least some embodiments, one of the BH paths 530, 531, 752 may have BH parameters associated with DL or UL direction that may favor a first
25 BH path for DL access traffic and a second BH path for UL access traffic. For example DSL CT may be asymmetric and favor DL access traffic. For example the access DL WCT resources may be oversubscribed relative to UL WCT resources favoring selection of BH WCT UL.

/*[Cend] 200 series

30 As previously noted, Figure 7b shows another backhaul system, according to an embodiment. In at least some embodiments, BS 510 may include BH CT 742 to a data network 752. For example BH CT 742 may include one or more carrier class T1/E1 which provide one or

more of low bandwidth and/or low latency and/or high cost. In at least some embodiments, BS 510 may also include BH WCT 530. In at least some embodiments, BH CT 742 has lower latency than BH WCT 530. In at least some embodiments, BH WCT 530 has higher bandwidth than BH CT 742. Based on the last two prior parameters access traffic associated to low latency and/or low bandwidth services or applications (such as VoIP or gaming) may be assigned to BH CT 742, access traffic associated to best effort and/or large bandwidth services or applications (such as video streaming, SW download, file sharing, cloud backup) may be assigned to BH CT 530. In at least some embodiments, one of the BH paths 530, 752 may have BH parameters associated with DL or UL direction that may favor a first BH path for DL access traffic and a second BH path for UL access traffic. For example DSL CT may be asymmetric and favor DL access traffic. For example the access DL WCT resources may be oversubscribed relative to UL WCT resources favoring selection of BH WCT UL.

/*300 Series

15 /*[C1] 300 Series

Figure 8 shows a system for estimating a future link quality of a user equipment (UE) at a future positioning, according to an embodiment. This embodiment includes a base station 800 and a UE device (or alternatively a user device or end user device or wireless end user device) 820, wherein the UE device 820 wirelessly communicates with the base station 800. According to at least some embodiments, at least one of a controller of the base station 800, a controller of the UE device 820, a controller (not shown) associated with the system, or a combination of the listed controllers is operative to determine a plurality of link qualities (LQs) 830a, 830b, of the UE device 820 for a plurality of positionings 860a, 860b of the UE device 820, wherein at least one of the plurality of positionings 860a, 860b includes at least a location or an orientation of the UE device 820. The one or more controllers are further operative to store information associated with the plurality of LQs 830a, 830b, for the plurality of positionings 860a, 860b, estimate at least one future positioning 870 of the UE device 820, and estimate a future link quality (LQ) 831 of the UE device 820 at the at least one future positioning 870 of the UE device 820 based on the stored information associated with the plurality of LQs 830a, 830b at the plurality of positionings of the UE device 820. For at least one embodiment the plurality of LQs are one or more of obtained, communicated, received, sent, transmitted, computed, post-processed, extrapolated, interpolated, derived in addition to or instead off stored. For at least one

embodiment the estimated future LQ are one or more of obtained, communicated, received, computed, post-processed, extrapolated, interpolated, derived in addition to or instead off estimated.

5 As shown, a neighboring base station (BS) 810 generates interference 841 which can be received by the UE device 820. For at least one embodiment one or more LQ 830a, 830b includes information associated with interference 841.

10 For at least one embodiment UE device 820 wirelessly communicates with a first BS (for example BS 800) at a first UE positioning (for example UE positioning 860a) and wirelessly communicates with a second BS (for example BS 810) at a second positioning (for example positioning 860b). For this embodiment a handoff between the first BS 800 and the second BS 810 may occur when the UE device 820 moves from the first UE positioning 860a to the second positioning 860b.

15 For at least one embodiment a scheduler (for example a scheduler within BS 800 for DL or UL) assigns resources (for example resource allocation of frequency channels, resource blocks, time slots to one of a plurality of UE device) or transmission modes (for example transmit power, modulation and coding scheme (MCS), transmit diversity or pre-coding or

20 MIMO or BF) based on information associated with a link quality between the UE device 820 and a link partner wirelessly communicating with the UE device 820. For at least one embodiment a scheduler assigns resources (for example a plurality of time-frequency RBs) to a plurality of UE devices at a plurality of future time slots. The information associated with the LQ of at least one of the plurality of UE devices at the plurality of future time slots may improve

25 one or more of the link efficiency, link robustness, PER, spectral efficiency, latency, of the wireless communication directed by scheduler. For at least one embodiment a scheduler assigns resources or transmission mode based on a UE future positioning LQ. For at least one embodiment the future LQ is based on a future positioning of the UE device. For at least one embodiment the future positioning of the UE device 820 is based on a future time. For at least

30 one embodiment the future LQ is based on positioning. For example a UE device may be located (stationary or mobile) within a home or office building and the path loss (or short /long term fading) of the desired signal and interfering signals may change based on the location due to

shadowing of windows or walls or reflections of objects surrounding the UE device. For example a UE device may be located (stationary or mobile) within a home or office building and the path loss (or short and/or long term fading) of the desired signal and interfering signals may change based on the orientation due shadowing of windows or walls or reflections of objects

5 surrounding the UE device or polarization of the transmit or receive antennas. For example the LQ of a UE device may be further based on a transmit mode selection (for example transmit power or transmit BF, etc.). For at least one embodiment it may be beneficial to account for transmit mode selecting when storing or estimating LQs. For at least one embodiment the stored or estimated future LQ is based on a carrier (or frequency channel) between the UE device and

10 the link partner. For at least one embodiment the stored or estimated future LQ is based on a link partner selection (for example if the UE device at a location where two serving BS may wirelessly communicate with the UE device). For at least one embodiment the stored or estimated future LQs may be based on surrounding objects. For example the positioning of at least a part of a user associated with the UE device (for example using sensors at the UE

15 device—such as touch sensors, camera, etc.). For example the location of the user's hands or head relative to the UE device. For at least one embodiment the stored information associated with the plurality of LQs includes a number of parameters. For example the stored information could be a multidimensional table including Cartesian (x,y,z) location (for example relative to a home or office origin) and two angle coordinates (for example azimuth and elevation relative to

20 North-South axis), user positioning (for example hand and head offset relative to a UE device origin), and interference level (for example max, min, typical). For at least one embodiment to reduce storage, the LQs information may be compressed (for example by decimating location or angle granularity, or by fitting the information to a function). For at least one embodiment the LQs information may be reduced by applying interpolation or extrapolation operations on the

25 stored LQs for estimating the future LQ. For at least one embodiment a correction factor is applied to some of the LQs information (for example the user hand and/or head information could be included as a correction factor that is independent of UE device location). For at least one embodiment the contributions of transmit mode in the estimated future LQ may be included as a correction factor.

30

For at least one embodiment the information associated with the plurality of LQs are stored at the UE device. For at least one embodiment the information associated with the

plurality of LQs are stored at the UE device to improve the privacy of the UE device or a user associated with the UE device. For at least one embodiment the information associated with the plurality of LQs are stored at the UE device to reduce control overhead to the wireless communication link. For at least one embodiment a user may select if the information associated with the LQs may be shared with the link partner. For at least one embodiment the information associated with the plurality of LQs of a first UE device are stored at an associated BS (for example one of more of a link partner BS or a neighbor BS or a interfering BS). For at least one embodiment the information associated with the plurality of LQs of a first UE device are stored at a second UE device. For at least one embodiment the information associated with the plurality of LQs of a first UE device are stored at one or more controllers associated with the first UE device, an associated BS, a BS aggregator or cluster or a cloud element (for example a cloud RAN or cloud BS).

For at least one embodiment a BS (for example BS 800) is communicating with a plurality of UE device (including UE device 820). For at least one embodiment the BS includes a scheduler for jointly scheduling the plurality of UE device. For at least one embodiment the BS obtains a plurality of estimated future LQs of the plurality of UE devices and the scheduler assigns resources to each of the plurality of UE devices based on the plurality of estimated future LQs (for example if a first UE SNR is estimated to increase and a second UE SNR is estimated to decrease), the second UE device may be scheduled before the first UE device. For at least one embodiment the BS obtains a plurality of estimated future LQs of the plurality of UE devices and the scheduler assigns transmit modes to each of the plurality of UE devices based on the plurality of estimated future LQs (for example the scheduler may assign joint resources to two UE devices using MU-MIMO or BF transmission).

25

/* [C2-C30] 300 Series

For at least one embodiment, the at least one of the future LQ or the plurality of LQs 830a, 830b includes one or more of a path loss (PL), S, I, SNR, SINR, SIR, CQI, CSI, PER. For at least one embodiment, the at least one of the future LQ or the plurality of LQs 830a, 830b is associated with an uplink or downlink transmission. For at least one embodiment, the at least one of the future LQ or the plurality of LQs 830a, 830b is associated with a frequency band or a frequency channel. A non-exhaustive list of exemplary frequency bands includes a 850MHz

30

GSM band (824–849MHz and 869–894MHz) and a PCS band (1,850–1,910MHz and 1,930–1,990MHz) cellular frequency bands. A non-exhaustive list of exemplary frequency channels include a 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz used for 4G-LTE. For at least one embodiment one or more channels may be used at each frequency band. For at least one embodiment, at least one of the future LQ or the plurality of LQs 830a, 830b is associated with a wireless communication technology. A non-exhaustive list of exemplary a wireless communication technologies include GSM, CDMA, HSPA, LTE. For at least one embodiment, at least one of the future LQ or the plurality of LQs 830a, 830b is associated with a link partner of the UE device 820.

10

For at least one embodiment, a link quality positioning information includes at least one of the determined plurality of LQs 830a, 830b, the stored information, the estimated future positioning 870 or the estimated future LQ 831. For at least one embodiment, the UE device 820 obtains at least a portion of the link quality positioning information from a link partner. More specifically, for at least one embodiment, the UE device 820 communicates at least a portion of the link quality positioning information to a link partner.

15

At least one embodiment further includes allocating a resource to a UE link, wherein the allocation of the resource to the UE link is based on the estimated future LQ 831. For at least one embodiment, the allocating can be performed by a controller, wherein the controller can be located within a base station or equivalent – such as, a combination of base stations, a base station controller, or cloud (for example a cloud RAN or cloud BS). More specifically, for at least one embodiment, the resource is one or more of a carrier, a frequency channel, a resource block, a time slot, a frequency band, a code.

20

At least one embodiment, further includes selecting a transmission mode for a UE link, wherein the selecting the transmission mode for the UE link is based on the estimated future LQ 831. Again, for at least some embodiments, the selecting can be performed by a controller, wherein the controller can be located within a base station or equivalent – such as, a combination of base stations, a base station controller, or cloud. For at least one embodiment, the transmission mode includes one or more of a modulation, a code, a modulation and coding scheme (MCS), a MIMO mode, a beamforming parameter, a transmit power.

25

30

At least some embodiments further include obtaining at least one future time, and wherein the estimating the at least one future positioning 870 is based on the at least one future time. For at least one embodiment a scheduler assigns resources (for example time-frequency RB or time slots—either DL or UL) to a UE device at a particular time slot or particular time-
5 frequency block or a particular time-code or a particular time-frequency-code blocks. For at least one embodiment the estimated future LQ (at one or more future times) may be used by the scheduler for improving the wireless communication between the UE device and the link partner (for example one or more BS) by assigning the particular resource or a particular resource at a particular transmission mode.

10

At least some embodiments further include a second plurality of positionings wherein the second plurality of positionings includes the at least one future positioning 870, and further includes estimating a second plurality of LQs based on the second plurality of positionings. More specifically, for at least one embodiment, the second plurality of positionings includes a
15 current positioning. More specifically, at least one embodiment further includes allocating a resource block (RB) to a UE device 820 link based on the estimated second plurality of LQs.

For at least some embodiments, the plurality of positionings is constrained to a physical area. More specifically, for at least some embodiments, the constrained physical area includes
20 one or more of at least a portion of a home, an office, or an office building.

For at least some embodiments, at least one of the plurality of positionings or the estimated at least one future positioning 870 of the UE device 820 further includes at least one of an error, an accuracy, a deformation, a velocity, an acceleration. For at least one embodiment a
25 velocity and/or acceleration (for example a current or past one or more of location or velocity or acceleration may be used to estimate a future position, for example using motion equations) may be used to obtain the estimated at least one future positioning. For at least one embodiment a positioning error or a positioning accuracy may be used to assign a quality measure or a confidence interval or a statistic measure to the positioning or the associated LQ. For example if
30 the positioning error is below a first threshold, the associated plurality of LQ of future estimated LQ error may be below a second threshold. For at least one embodiment if an error (or alternatively accuracy) of at least one of a plurality of LQ or estimated future LQ are below a

first threshold, the associated wireless communication PER may be below a second threshold. For at least one embodiment a data communication over wireless communication between UE device 820 and BS 800 requires a low PER and the estimated future positioning error must be below a threshold or the transmission mode must have additional margin (above a threshold) or robustness.

/*[Storing or estimating based on UE device 820 usage+environment information] 300 Series

At least some embodiments further include determining a UE device 820 usage information, wherein at least a portion of the link quality positioning information is based on the UE device 820 usage information. More specifically, for at least some embodiments, the UE device 820 usage information includes UE device 820 information indicating one or more of a user handheld mode, a hands-free mode, a speaker phone mode, a car Bluetooth mode, a headset Bluetooth mode. For at least one embodiment the UE device 820 being in handheld mode results in additional signal loss or attenuation from the users' hand (and/or head). For at least one embodiment the UE device 820 being in car Bluetooth mode results in additional signal loss from car walls/exterior but typically less attenuation from not being indoors and typically additional channel fluctuations from car mobility. For at least one embodiment the UE device 820 being in speaker phone mode results in lower loss from head attenuation.

At least some embodiments further include determining a UE device 820 environment information, wherein at least a portion of the link quality positioning information is based on the UE device 820 environment information. More specifically, for at least some embodiments, the UE device 820 environment information includes information associated to one or more of a traffic load, a network load, an interference. For at least some embodiments, the UE device 820 environment information includes one or more time of day, whether information (for example, temperature, wind, or humidity), day of year, or season. For at least some embodiments, the UE device 820 environment information includes information associated with surrounding objects. For at least some embodiments, the UE device 820 environment information includes information associated with a user of the UE device. For at least some embodiments, the information associated with the user of the UE device includes positioning of the user of the UE device 820. For at least some embodiments, the information associated with the user of the UE device includes positioning of the user of the UE device 820 relative to the UE device 820. At

least some embodiments further include assisting determining the UE device 820 environment information using sensors of the UE device 820. The sensors include, for example, a camera a touchscreen and/or gyroscope.

5 /*[C31] 300 Series

Figure 9 shows another system for estimating a link quality of a UE device at a neighboring positioning, according to an embodiment. It is to be understood that the embodiments of Figure 8 can be applied to the embodiments of Figure 9.

10 For at least one embodiment it is desirable to estimate (or alternatively derive or obtain or predict or interpolate or extrapolate) a link quality at one or more positionings that are within a positioning threshold of a current positioning of a UE device. For example, the link quality from one or more possible changes of positioning may be estimated for attempting to improve the link quality (for example if the current LQ is not adequate). For at least one embodiment
15 moving to a neighboring positioning may include rotating the UE device from a vertical to a horizontal positioning, or moving from the left side to the right side of a user's head, or walking the UE device to a different location in a room or a building.

 The embodiment of Figure 9 includes a base station 800 and user equipment 820 (UE),
20 wherein the UE device 820 wirelessly communicates with the base station 800. According to at least some embodiments, at least one of a controller of the base station 800, a controller of the UE device 820, a controller (not shown) associated with the system, or a combination of the listed controllers is operative to determine a plurality of link qualities (LQs) 830a, 830b, of the UE device 820 for a plurality of positionings 860a, 860b of the UE device 820, wherein at least
25 one of the plurality of positionings 860a, 860b includes at least a location or an orientation of the UE device 820. The controller(s) are further operative to store information associated with the plurality of LQs 830a, 830b for the plurality of positionings 860a, 860b, estimate at least a positioning of the UE device, determine at least one neighboring positioning 970 of the positioning of the UE device 820, and estimate a link quality (LQ) 931 of the UE device 820 at
30 the at least one neighboring positioning 970 of the UE device 820 based on the stored information associated with the plurality of LQs 830a, 830b at the plurality of positionings 860a, 860b of the UE device 820.

/*[C32-C40] 300 Series

At least some embodiments further include adjusting or changing a configuration of the UE device 820 based on the estimated LQ 931. At least some embodiments further include
5 presenting the estimated LQ 931 of the UE device 820 at the at least one neighboring positioning 970. That is, present estimated LQ 931 of the UE device 820 at the at least one neighboring positioning 970 to a user of the UE device 820. At least some embodiments further include selecting a candidate positioning from the at least one neighboring positioning 970 based on the estimated LQ 931. At least some embodiments further include presenting the selected candidate
10 positioning to a user of the UE device 820. For at least some embodiments a link quality neighboring positioning information includes at least one of the determined plurality of LQs 830a, 830b, the stored information, the estimated at least a positioning of the UE device 820, the determined at least one neighboring positioning 970, or the estimated LQ. At least some embodiments further include determining a UE device 820 environment information, wherein at
15 least a portion of the link quality neighboring positioning information is based on the UE device 820 environment information. For at least some embodiments the UE device 820 environment information includes information associated with a user of the UE device 820. At least some embodiments further include selecting a joint candidate positioning of the UE device 820 and a user of the UE device 820, wherein the joint candidate positioning includes a combination of a
20 UE device 820 positioning and a user positioning relative to the UE device 820. At least some embodiments further include presenting the selected joint candidate positioning.

For at least one embodiment it may be beneficial to estimate a LQ at a neighboring positioning based on a first positioning. For at least one embodiment the first positioning may be
25 a current positioning. For at least one embodiment it may be beneficial to estimate a LQ at a plurality of neighboring positioning based on a first positioning. The estimated future LQ at the plurality of neighboring positioning may be presented to a user of the UE device (for example in a color coded map of a first positioning and a plurality of neighboring positioning). For at least one embodiment the plurality of estimated future LQ at the plurality of neighboring positioning
30 may be used to select a desired neighboring positioning. For at least one embodiment the plurality of estimated future LQ at the plurality of neighboring positioning may be used to select a desired neighboring positioning with improved wireless communication parameters (lower

PER, higher data rates, higher spectral efficiency, lower transmit power, lower received or generated interference, better coverage, etc.). For at least one embodiment the selected neighboring positioning may be presented to a user of the UE device (for example by voice command or in a color coded map or diagram of a first positioning and one or more selected positioning). For example a UE device may determine that moving the UE device by a given amount in a given direction improves LQ (for example due to wall shadowing loss). For example the UE device may determine that rotating the UE device around a horizontal axis improves LQ (for example due to antenna polarization gain). For at least one embodiment the plurality of estimated future LQ at the plurality of neighboring positioning may be used to select a desired neighboring positioning for a user. For example moving the UE device user's hand relative to a phone or tablet or a user rotating relative to a vertical axis to reduce head or body attenuation (combined effects of hands and head are known to reduce path loss by 5-10dB). For at least one embodiment the selection of neighboring positioning for estimating LQ is based on a user selection (for example only evaluate neighboring positioning within 5 ft). For at least one embodiment a neighboring positioning is selected if the future LQ improves by a given threshold (for example a neighboring candidate position is only presented if the path loss improved by 3dB). For at least one embodiment the threshold is provided by a user of the UE device.

Figure 10 shows another system for estimating a future link quality of a UE device at a future time based on a future positioning (for example UE positioning at second time 1060b), according to an embodiment. It is to be understood that the embodiments of Figure 8 can be applied to the embodiments of Figure 10.

For at least one embodiment the estimated future LQ at a future time is based on a UE positioning history (for example the UE positioning at first time 1060a), wherein the UE positioning history includes at least one UE positioning prior to the future positioning (for example at the future time). For at least one embodiment the estimated future LQ at a future time is based on a UE positioning path (for example UE positioning path 1070), wherein a positioning path may include a plurality of UE positioning (for example UE positioning at two or more times or time instances) or a UE positioning trajectory or UE positioning function of time (for example derived from equations of motion based on a first positioning and/or first velocity and/or first acceleration). For at least one embodiment Figure 10 shows a system for estimating

a plurality of LQ based on one or more of a UE positioning at first time 1060a, UE positioning path 1070 or UE positioning at a second time 1060b, for example based on one or more of positioning and positioning motion (for example velocity, acceleration, etc.).

5 Figure 11 shows another system for estimating a future link quality 1031 of a second UE device 830 at a future positioning 1170 based on link qualities 830a, 830b based on a plurality of positionings 1160a, 1160b of a first UE device 820, at according to an embodiment. It is to be understood that the embodiments of Figure 8 can be applied to the embodiments of Figure 11.

10 For at least one embodiment one or more parameters associated with UE device 820 or UE device 830 (for example device type—smartphone, tablet—transmit power, number of antennas, receiver processing, receiver noise figure, etc.) are included in the estimation of the LQ of UE device 830 based on the LQ 830a, 830b associated with UE device 820. For at least one embodiment information associated with the plurality of LQs for a plurality of positioning of UE
15 device 820 are combined with information associated with the plurality of LQs for a plurality of positioning of UE device 830 for improving the stored information for estimating a future link quality. For example an office building with multiple UE devices and users may combine the plurality of LQs (for example by device type) for improving the estimated future LQ. In contrast with the embodiment of Figure 8, the UE device 820 does not need to estimate its own future
20 link quality. However, the link quality of the UE device 830 is estimated.

/*[C1] 400 Series

Figure 12 shows a wireless system that includes characterizing of interference at a user equipment, according to an embodiment. The system includes a base station (BS) 1200, wherein
25 the BS 1200 is operative to wirelessly communicate with a plurality of user equipment (UE) (such as, UE device 1211 as shown by the solid arrow between BS 1200 and UE device 1211). The system includes one or more controllers operative to select one or more base stations (BSs) 1201, 1203 (as shown by a thicker cell boundaries for BS cell 1221 and BS cell 1223) associated with base station 1200. It is to be noted, for example, that BS 1202 is associated with BS 1200
30 based on control 1240, but has not been selected as shown by standard thickness for BS cell 1222. Further, the same or different or a combination of same a different controllers are operative to schedule the selected one or more BSs 1201, 1203 associated with the BS 1200 to

transmit according to at least one transmission mode during a scheduled transmission (in some embodiments the transmission generates interference at UE device 1211 as represented by the dashed-arrows between BS 1201 and UE device 1211 and BS 1203 and UE device 1211).

Further, at least one of the plurality of UE devices (such as UE device 1211) are operative to
5 characterize interference at the at least one of the plurality of UE devices (such as UE device 1211) during the scheduled transmission.

/*[C2-C16, C26-C55] 400 series

The characterized interference includes, for example, one or more of co-channel
10 interference, adjacent channel interference, intersector interference, intercell interference, intrasystem interference, intersystem interference.

For at least some embodiments, the wireless system includes at least one of a WiFi system, a WiMAX system, a cellular system, a 3G system, a 4G system, a HSPA system, an LTE
15 system. Further, for at least some embodiments, the BS 1200 includes at least one of an AP, a NodeB, a eNodeB, a macrocell BS, a microcell BS, a relay node, a femtocell, a Distributed Antenna System (DAS) BS, a Remote Radio Head (RRH) BS, a small cell BS.

For at least some embodiments, the BS 1200 and one or more BSs (for example a subset of 1201, 1202, 1203, 1204) are part of a heterogeneous network. For an embodiment, the BS
20 1200 includes one or more sectors or cells. For an embodiment, the BS 1200 includes a coverage area or a cell.

For at least some embodiments, the at least one UE device includes one or more of an mobile terminal (MT), an access terminal (AT), a customer premises equipment (CPE).

25 For at least some embodiments, selecting the one or more BSs (for example a subset of BS 1201, 1202, 1203, 1204) associated with the BS 1200 is based on physical proximity. More specifically, for an embodiment the selecting of the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) associated with the BS 1200 is based on the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) being located within a threshold distance from
30 the BS. For an embodiment, at least one of the selected one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) associated with the BS 1200 is a neighboring BS. For an

embodiment, the BS 1200 includes a coverage area or a cell, and wherein at least one of the selected one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) associated with the BS 1200 is within the coverage area of the BS.

5 For an embodiment, the BS 1200 and at least one of the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) are classified, and wherein the selecting of the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) is based on the classification. For an embodiment, the classification is based on one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) parameters. A non-exhaustive list of exemplary parameters include at
10 least one of BS 1200 height, BS 1200 coverage area, BS 1200 transmit power, BS 1200 antenna configuration, and/or BS 1200 type (macro, micro, relay node, femto).

 For an embodiment, the BS 1200 and the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) are a subset of a plurality of BSs from a cellular wireless system, and
15 wherein the plurality of BS from the cellular system are grouped into one or more clusters, and wherein the BS 1200 and the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) are part of a same cluster.

 For at least some embodiments, selecting at least one of the one or more BSs (for
20 example a subset of BSs 1201, 1202, 1203, 1204) associated with the BS 1200 is based on an interference estimate. For an embodiment, the interference estimate is based on at least one of a distance between at least one of the selected one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) and the at least one of the plurality of UE devices, a path loss model applied to at least one of the selected one or more BSs (for example a subset of BSs 1201, 1202, 1203,
25 1204) and the plurality of UE devices, a propagation loss application, an interference measurement data, or an interference estimate by the at least one of the plurality of UE devices.

 For at least some embodiments, the BS 1200 and the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) are synchronized. For an embodiment, the
30 synchronization includes one or more of time, timing phase, timing frequency, carrier phase or carrier frequency synchronization. For an embodiment, the synchronization further includes transmitting the at least one transmission mode with a time offset associated with a wireless

communication propagation time. For at least one embodiment synchronizing the BS 1200 with one or more BSs simplifies the interference characterization and/or improves the time and/or frequency alignment of the desired and interfering transmission modes. For at least one embodiment transmitting the at least one transmission mode with a time offset associated with a wireless communication propagation time improves the time alignment of a the at least one transmission mode signal and a one or more second transmission mode signal as received by one or more UE devices (for example a desired and interfering signal may be better aligned at a UE receiver or a interfering signal and a Null transmission signal may be better aligned simplifying an interference measurement).

10

For at least some embodiments, the at least one transmission mode includes an active transmission mode. For at least one embodiment the active transmission mode includes one or more of a training mode, control mode or data mode. For at least one embodiment the active transmission mode is a non-zero or non-null transmission mode. For an embodiment, the at least one transmission mode includes a data transmission mode. For an embodiment, the data transmission mode includes a data or a data payload. For an embodiment, the data transmission mode includes data intended to be received by at least one UE device wirelessly communicating with the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204). For an embodiment, the data transmission mode includes data intended to be transmitted to a virtual UE device wirelessly communicating with the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) or data without a target destination. For at least one embodiment at least one of the one or more BSs is scheduled to send a transmission mode but no (link partner) UE device is expecting a data communication at the scheduled transmission. In such an embodiment the at least one BS may send a data transmission to a virtual UE device (for example a special or ghost or imaginary or out of range UE device). This embodiment allows for transmission of data without requiring a UE device communicating with the BS at the scheduled transmission.

For an embodiment, the data transmission mode includes random data or pseudo-random data or scrambled data. For at least one embodiment, if the BS does not have data to transmit at the scheduled transmission it may transmit filler data, for example random or pseudo-random or stuffed data.

For an embodiment, the at least one transmission mode includes one or more of a transmission power, a MIMO mode, a beamforming parameter, a PMI, a MCS, a selected transmit antenna.

5 For an embodiment, the at least one transmission mode includes a high interference mode, low interference mode or typical interference mode. For at least one embodiment the at least one transmission mode includes a high interference mode to assist at least one of the plurality of UE device (such as UE device 1211) to characterize high interference levels, for example to improve the estimation accuracy or to characterize an upper range of possible
10 interference levels (for example if an inferring BS has transmit power control, or SFR (soft frequency reuse). For at least one embodiment the at least one transmission mode of a first BS includes a low interference mode to assist at least one of the plurality of UE device (such as UE device 1211) to characterize low interference levels, for example to improve the estimation accuracy of a second BS or to characterize a lower range of possible interference levels (for
15 example if an inferring BS has transmit power control, or SFR).

For an embodiment, the scheduled at least one transmission mode includes a periodic schedule. For at least one embodiment the transmission mode includes the periodic schedule to reduce a control of the scheduled transmissions or to reduce the complexity of at least one of the
20 plurality of UE devices to characterize the interference (for example reducing a search time or control message decoding).

For an embodiment, the scheduled at least one transmission mode includes a wireless communication resource. For an embodiment, the wireless communication resource includes
25 one or more of a resource block, a code, a time slot, a frequency band.

For an embodiment, the wirelessly communicating includes a frame structure, the frame structure including a control signal having a placement relative to the frame structure, wherein the scheduled transmission is scheduled relative (for example a time or frequency offset) to the
30 control signal. For an embodiment, the placement is fixed and/or known. For an embodiment, the frame structure is for transmission. For an embodiment, the wirelessly communicating includes a frame structure, the frame structure including a control signal having a placement

relative to the frame structure, wherein the scheduled transmission is directed or enabled by the control signal. For an embodiment, the placement includes a timing and/or frequency offset. For an embodiment, the wirelessly communicating includes a periodic frame structure, including a periodic control signal having a placement relative to the periodic frame structure, wherein the scheduled transmission is scheduled relative to the periodic control signal. For an embodiment, the placement is fixed and/or known. For an embodiment, the frame structure is for transmission. For an embodiment, the scheduled transmission is scheduled at a fixed time or frequency offset relative to a known placement of the periodic control signal. For an embodiment, the scheduled transmission is scheduled at a structured known time or frequency offset relative a known placement of the periodic control signal.

For at least some embodiments, scheduling the selected one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) associated with the BS 1200 includes transmitting according to the at least one transmission mode during a plurality of scheduled transmissions. For an embodiment, the plurality of scheduled transmissions have a duty cycle relative to the wireless communication below a threshold. For an embodiment, the plurality of scheduled transmissions occupy a fraction (for example below a threshold, typically <10%) of wireless communication resources. For an embodiment, the plurality of scheduled transmissions are periodically or quasi-periodically scheduled relative to a wireless communication frame control signal. For an embodiment, the plurality of scheduled transmissions are dynamically allocated by a wireless communication frame control signal. For an embodiment, each of the plurality of scheduled transmissions includes at least one of a plurality of transmission modes. For an embodiment, selecting at least one of the plurality of transmission modes for each of the plurality of scheduled transmissions is based on a regular pattern. For an embodiment, the regular pattern is dynamically modified by a frame control signal. For at least one embodiment a regular pattern simplifies the control for transmission of the plurality of transmission modes. For at least one embodiment a regular pattern simplifies at least one of the plurality of UE devices (such as UE device 1211) are operative to characterize interference at the at least one of the plurality of UE devices (such as UE device 1211) during the scheduled transmission by reducing complexity for decoding of control signals or complexity to remove desired signals or other interfering signals from the received signals. For at least one embodiment the regular pattern is dynamically modified based on data traffic transmission parameters associated with the BS (for example

based on BS data traffic load—highly loaded vs lightly loaded, or based on distribution of data traffic transmission modes—for example SISO vs. MIMO vs. BF or SFR). For at least one embodiment a regular pattern is dynamically modified based on a BS becoming active or inactive (for example a femto cell).

5

For at least some embodiments, the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) associated with the BS 1200 dynamically changes.

At least some embodiments further include a plurality of scheduled transmissions, and
10 further including dynamically selecting the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204) associated with the BS. For an embodiment, a fifth UE device of the plurality of UE devices is configured to characterize interference during the plurality of scheduled transmission and dynamic selection of the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204). For an embodiment, the fifth UE device is configured to characterize
15 interference of the dynamic selection of one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204), enables estimation of an interference contribution from at least one of the one or more BSs (for example a subset of BSs 1201, 1202, 1203, 1204).

For at least some embodiment, the wirelessly communicating includes a frame structure,
20 the frame structure including at least a control subframe and a data subframe, wherein the data subframe includes the scheduled transmission.

Figure 13 shows another wireless system that includes characterizing of interference at a user equipment, according to an embodiment. The system includes a base station (BS) 1200,
25 wherein the BS 1200 is operative to wirelessly communicate with a plurality of user equipment (UE) (such as, UE device 1211). The system includes one or more controllers operative to control BS 1200 to transmit a null transmission mode (shown as the dotted BS cell 1220) during at least a portion of the scheduled transmission of BS 1201 or BS 1203 (shown as thicker cell boundaries of BS cell 1221 and BS cell 1223).

30

/*[C17, 18] 400 Series

More specifically, for at least some embodiments further include scheduling the BS 1200 to transmit a null transmission mode during at least a portion of the scheduled transmission. For an embodiment, the null transmission includes a non-active transmission, wherein an active transmission is one or more of a training transmission mode, a control transmission mode and a data mode. For at least one embodiment the null transmission includes a BS transmission signal (or power) level below a threshold. For at least one embodiment the null transmission is a constant transmission or contains mostly noise or other non-desired transmission due to imperfections of a transmitter. For at least one embodiment the null transmission is intended to be a zero transmission but may include some spurious or undesired signals or noise.

10

At least some embodiment further include characterizing, by at least a second UE device of the plurality of UE devices, interference during the null transmission mode at the at least a portion of the scheduled transmission.

15 Figure 14 shows another wireless system that includes characterizing of interference at a user equipment, according to an embodiment. The system includes a base station (BS) 1200, wherein the BS 1200 is operative to wirelessly communicate with a plurality of user equipment (UE) (such as, UE device 1211). The system includes one or more controllers operative to selecting a BS 1201 to schedule the selected BS 1201 to transmit a null transmission mode (shown as the dotted BS cell 1221) during at least a portion of the scheduled transmission of BS 1203 (shown as thicker cell boundary of BS cell 1223).

20

/*[C19-C25] 400 Series

At least embodiments, further include selecting a second BS, and scheduling the selected second BS 1201 (selected BS) to transmit a null transmission mode during at least a second portion of the scheduled transmission. For an embodiment, the selection of the second BS 1201 is based on one or more of a physical proximity of the second BS 1201 relative to the BS 1200, being a designated as a neighbor of the BS 1200, being within a coverage area of the BS 1200, a classification of the second BS 1201 and the BS 1200. For an embodiment, the second BS 1201 is selected based on an estimate of its generated interference to one or more of the plurality of UE devices being above a threshold. For an embodiment, selecting the second BS 1201 is based on an interference estimate. For an embodiment, the interference estimate is based on at least

30

one of a distance between the second BS 1201 and at least one of the plurality of UE device, a path loss model applied to the second BS 1201 and the plurality of UE devices, a propagation loss application, an interference measurement data, an interference estimate by at least one of the plurality of UE devices. An embodiment further includes characterizing, by at least a third UE

5 device of the plurality of UE devices, interference during the null transmission mode of the at least the second portion of the scheduled transmission. For an embodiment, the characterizing of the interference occurs during null transmission of second BS 1201. At least some embodiments further include characterizing, by at least a fourth UE device of the plurality of UE devices, an interference contribution of the second BS and the one or more BSs during the null

10 transmission mode of the at least the second portion of the scheduled transmission. For an embodiment, the characterizing of the interference occurs during null transmission of second BS 1201. Figure 16 shows an example of three BS, BS1, BS2, BS3 scheduling resource blocks on the same frequency channel (or carrier) A (represented by rectangular blocks with x-axis in time units and y-axis in frequency units), according to an embodiment. In the example of Figure 16,

15 the unused RB are represented as blank rectangles, and the active scheduled RB are represented as three different shades of gray: light for transmit mode (TM) c, medium for TMb and dark for TMa (for example the shade of gray may represent a transmit power level). In the example of Figure 16 all BS are active during time slot 1 (including all frequency bands), which may represent control or reference signals simultaneously transmitted from all three BS. For example

20 BS1 allocates contiguous RB between time units 1 to 5. For example BS2 allocates time unit 1 and has a gap until units 5-6. BS3 allocated time units 1-2. A receiver (for example UE1) may receive a linear combination of all three BS transmissions, attenuated by respective gains G1, G2 and G3. From this example the interference will be worst at time unit (or slot) 1, since all three BS are active and interference would be minimum at time units 7 and 8. Other time units 2

25 through 6 would have intermediate interference levels. From this example the measured interference is a function of the resource block that is selected for measuring interference and is dependent on scheduling decisions (and traffic load) of the interfering BS. For at least one embodiment it may be advantageous to schedule a resource block and a transmit mode so that the interference measurement at UE1 has less variability. For at least one embodiment improved

30 interference measurements results in one or more of improved resource allocation and improved MCS selection, lower PER, reduced retransmissions for UE1.

Figure 17 shows a plurality of BS cells, according to an embodiment. In this example (and following figures) all cells are homogenous hexagons for simplicity of representation. In practice BS cells may be heterogeneous (for example different sizes and shapes) and a smaller BS cell (for example micro, pico, femto, or relay node) may be within the coverage area of a larger cell (for example macro or micro). In this example (and several following figures) a cell with a scheduled null transmission is represented as a blank (or white) hexagon. In this example (and several following figures) a cell with a scheduled transmission mode is represented as a dark gray hexagon. In this example (and several following figures) a cell that is not constrained to a transmission mode or a null transmission is represented as a light gray hexagon. In the example of Figure 16, a receiver in BS1 or a receiver of a plurality of UE devices wirelessly communicating with BS1 may measure joint interference from all six nearest neighboring BS: BS2-BS7 which have all been scheduled to follow a transmission mode. For at least one embodiment all remaining farther neighbors are unrestricted and may transmit (or not) based on local traffic requirements. In the example of Figure 16 BS1 (or all the UE devices associated with BS1 for UL measurements at BS1) is scheduled to transmit a null transmission. For at least one embodiment a null transmission reduced the complexity of estimating interference. For at least one embodiment BS1 (or a selected UE device) may transmit and the interference may be estimated after subtracting the contribution of the desired signal.

Figure 18 shows an example where two BS clusters (BS1-BS7 and BS11-BS17) may be simultaneously scheduling transmission modes or null transmissions or characterizing interference in parallel, according to an embodiment. For at least one embodiment if the two BS clusters are sufficiently separated the interference coupling between the two clusters may be negligible. For at least one embodiment simultaneous scheduling of transmission active and null modes with a reuse factor (or minimum separation or cluster size) increases interference measurement rate or transmission efficiencies.

Figure 19a and 19b show an example of a pattern (for example regular) of BS simultaneously scheduling transmission modes or null transmissions or characterizing interference in parallel, dynamically moving from a first cluster of BS (BS2, BS1, BS7, BS17, BS12, BS13, BS3) to a second (for example partially overlapping cluster: BS1, BS5, BS6, BS7, BS2, BS3, BS4) cluster of BS, according to an embodiment.

Figure 20 shows an example of a cluster of BS simultaneously scheduling transmission modes or null transmissions or characterizing interference in parallel, with a plurality of null transmission BS (for example neighboring cluster BS1, BS3, BS4), such as a hand-off associated list of BS, according to an embodiment.

Figure 21 shows an example of a cluster of BS simultaneously scheduling transmission modes or null transmissions or characterizing interference in parallel to assist FFR or SFR including at least a high transmit power and/or a low transmit power plurality of BS (for example BS1, BS3, BS4 transmitting at lower transmit power T_{Mb} represented by a smaller cell), according to an embodiment.

/*500 series.

/*[C1, C58] 500 Series

Figure 15 shows a wireless system that includes characterizing of interference at a base station, according to an embodiment. The wireless system includes a first base station (BS) 1200, wherein the first BS 1200 is operative to wirelessly communicate with a first plurality of user equipment (UE) (such as UE device 1510). One or more controllers (associated with the control 1240, associated with at least the first or second base stations 1200, 1201, or an combination of) are operative to select a second BS 1201 associated with first BS 1200. The second BS 1201 is operative to wirelessly communicate with a second plurality of UE devices (such as UE devices 1511, 1512). Further, the one or more controllers (which can be a different, same or combination of the prior controller) are operative to select a UE device 1511 from the second plurality of UE devices 1511, 1512. Further, the one or more controllers (which can be a different, same or combination of the prior controller) are operative to schedule the selected UE device 1511 to transmit according to a transmission mode during a scheduled transmission. Further, the first BS 1200 is operative to characterize interference at a least a portion of the scheduled transmission.

It is to be understood that the embodiments of Figure 12, Figure 13, Figure 14 can be modified from DL transmission mode to UL transmission mode and applied to the embodiments of Figure 15.

/*[C2-C17, C27-C57] 500 Series

The characterized interference includes, for example, one or more of co-channel interference, adjacent channel interference, intersector interference, intercell interference,
5 intrasystem interference, intersystem interference.

For at least some embodiments, the wireless system includes at least one of a WiFi system, a WiMAX system, a cellular system, a 3G system, a 4G system, a HSPA system, an LTE system. Further, for at least some embodiments, the BS 1200 includes at least one of an AP, a
10 NodeB, a eNodeB, a macrocell BS, a microcell BS, a relay node, a femtocell, a Distributed Antenna System (DAS) BS, a Remote Radio Head (RRH) BS, a small cell BS.

For at least some embodiments, the BS 1200 and one or more BSs 1201, 1202 are part of a heterogeneous network. For an embodiment, the BS 1200 includes one or more sectors or
15 cells. For an embodiment, the BS 1200 includes a coverage area or a cell (such as BS cell 1220).

For at least some embodiments, the at least one of the first or second plurality of UE devices (such as, UE devices 1511, 1512) includes one or more of an MT, an AT, a CPE.

20 For at least some embodiments, the selected second BS 1201 associated with the first BS 1200 is a neighboring BS.

For at least some embodiments, the first BS 1200 includes a coverage area or a cell (such as BS Cell 1220), and wherein the selected second BS 1202 associated with the first BS 1200 or
25 the selected UE device from the second plurality of UE devices (such as, UE device 1514) is within the coverage area of the first BS 1200.

For at least some embodiments, the first BS 1200 and the second BS 1201 are classified, and wherein the selecting of the second BS 1201 is based on the classification. For at least some
30 embodiments, the classification is based on one or more BS parameters. A non-exhaustive list of exemplary BS parameters include at least one of BS height, BS coverage area, BS transmit power, BS antenna configuration, BS type (macro, micro, relay node, femto).

For at least some embodiments, the second plurality of UE devices (such as, UE devices 1511, 1512) are classified, and wherein the selecting the UE device is based on the classification. A non-exhaustive list of exemplary UE device classifications include at least one of UE device
5 height, UE device transmit power, UE device antenna configuration, UE device type (macro, micro, relay node, femto), UE device mobility, UE device data/resource usage.

For at least some embodiments, the first BS 1200 and the second BS 1201 are a subset of a plurality of BSs from a cellular wireless system, and wherein the plurality of BS from the
10 cellular system are grouped into one or more clusters, and wherein the first BS 1200 and the second BS 1201 are part of a same cluster.

For at least some embodiments, selecting the second BS 1201 associated with the first BS 1200 or the UE device from the second plurality of UE devices (such as, UE devices 1511, 1512)
15 is based on an interference estimate. For an embodiment, the interference estimate is based on at least one of a distance between the selected UE device and the first BS 1200, a path loss model applied to the selected UE device and the first BS 1200, a propagation loss application, an interference measurement data, an interference estimate by the first BS 1200.

20 /*[C27-C57] 500 Series

For at least some embodiments, the first BS 1200 and the second BS 1201 are synchronized. For an embodiment, the synchronization includes one or more of time, timing phase, timing frequency, carrier phase or carrier frequency synchronization. For an embodiment,
25 the synchronization further includes transmitting the transmission mode with a time offset associated with a wireless communication propagation time.

For at least some embodiments, the transmission mode includes an active transmission mode. For an embodiment, the transmission mode includes a data transmission mode. For an
30 embodiment, the data transmission mode includes a data carrying or a data payload. For an embodiment, the data transmission mode includes data intended to be received by the second BS 1201. For an embodiment, the data transmission mode includes virtual data or data without a

target destination. For an embodiment, the data transmission mode includes random data or pseudo-random data or scrambled data.

For at least some embodiments, the transmission mode includes one or more of a
5 transmission power, a MIMO mode, a beamforming parameter, a PMI, a MCS, a selected transmit antenna. For an embodiment, the transmission mode includes a high interference mode, low interference mode or typical interference mode.

For at least some embodiments, the scheduled transmission mode includes a periodic
10 schedule. For an embodiment, the scheduled transmission mode includes a wireless communication resource. For an embodiment, the wireless communication resource includes one or more of a resource block, a code, a time slot, a frequency band.

For at least some embodiments, the wirelessly communicating includes a frame structure,
15 the frame structure including a control signal having a placement (for example one or more of a time slot, frequency or time offset) relative to the frame structure, wherein the scheduled transmission is scheduled relative to the control signal. For an embodiment, the scheduled transmission placement is fixed and/or known. For an embodiment, the frame structure is for transmission. For an embodiment, the frame structure includes a DL subframe and an UL
20 subframe and wherein the DL subframe includes the control signal (for example one or more of a frame boundary, synch, RS, etc.) and the UL subframe includes the scheduled transmission.

For at least some embodiments the wirelessly communicating includes a frame structure, the frame structure including a control signal having a placement relative to the frame structure,
25 wherein the scheduled transmission is directed or enabled by the control signal. For an embodiment, the wirelessly communicating includes a periodic frame structure, including a periodic control signal having a placement relative to the periodic frame structure, wherein the scheduled transmission is scheduled relative to the periodic control signal. For an embodiment, the placement is fixed and/or known. For an embodiment, the frame structure is for transmit.
30 For an embodiment, the scheduled transmission is scheduled at a fixed time or frequency offset relative to a known placement of the periodic control signal. For an embodiment, the scheduled

transmission is scheduled at a structured known time or frequency offset relative a known placement of the periodic control signal.

For at least one embodiment, scheduling the selected UE device includes transmitting
5 according to at least one transmission mode during a plurality of scheduled transmissions.

At least one embodiment further includes selecting at least two UE devices from the second plurality of UE devices (such as, UE devices 1511, 1512) including the selected UE device, wherein scheduling the at least two UE devices includes transmitting according to at least
10 one transmission mode for each of the selected at least two UE devices during a plurality of scheduled transmissions. For an embodiment, the plurality of scheduled transmissions have a duty cycle relative to the wireless communication below a threshold. For at least one embodiment, the plurality of scheduled transmissions occupy a fraction (for many embodiments the fraction will be low, for example <10%) of wireless communication resources. For an
15 embodiment, the plurality of scheduled transmissions are periodically or quasi-periodically scheduled relative to a wireless communication frame control signal. For an embodiment, the plurality of scheduled transmissions are dynamically allocated by a wireless communication frame control signal. For an embodiment, each of the plurality of scheduled transmissions includes at least one of a plurality of transmission modes. For an embodiment, selecting at least
20 one of the plurality of transmission modes for each of the plurality of scheduled transmissions is based on a regular pattern. For an embodiment, the regular pattern is dynamically modified by a frame control signal.

For at least one embodiment, the selected second BS 1201 associated with the first BS
25 1200 or the selected UE device from the second plurality of UE devices (such as, UE devices 1511, 1512) wirelessly communicating with the second BS 1201 dynamically changes. At least one embodiment further includes a plurality of scheduled transmissions, and further includes dynamically selecting the second BS 1201 associated with the first BS 1200 or the selected UE device from the second plurality of UE devices (such as, UE devices 1511, 1512) wirelessly
30 communicating with the second BS 1201. For an embodiment, first BS 1200 is configured to characterize interference of the selected UE device during the plurality of scheduled transmission and dynamic selection of the second BS 1201 or the selected UE device from the second

plurality of UE devices (such as, UE devices 1511, 1512) wirelessly communicating with the second BS 1201. For an embodiment, the first BS 1200 is configured to characterize interference of the dynamic selection of the second BS 1201 and the selected UE device, enables estimation of an interference contribution from at least one of the second plurality of UE devices
5 (such as, UE devices 1511, 1512) wirelessly communicating with the second BS 1201.

At least some embodiment include the wirelessly communicating includes a frame structure, the frame structure including at least a control subframe and a data subframe, wherein the data subframe includes the scheduled transmission.

10

/*[C18] 500 Series

In at least one embodiment, one or more controllers are operative to scheduling the first plurality of UE device (such as UE device 1510) to transmit a null transmission mode during at least a portion of the scheduled transmission. Further, the first BS 1200 is operative to
15 characterize interference at a least a portion of the scheduled null transmission.

/*[C19] 500 Series

At least one embodiment further includes characterizing, by the first BS 1200, interference during the null transmission mode at the at least a portion of the scheduled transmission.

20

/*[C20] 500 Series

In at least one embodiment, one or more controllers (associated with the control 1240, associated with the first or second or third base stations 1200, 1201, 1202 or an combination of) are operative to select a third BS 1202 associated with first BS 1200. The third BS 1202 is
25 operative to wirelessly communicate with a third plurality of UE devices (such as UE device 1514 within BS cell 1222). Further, the one or more controllers (which can be a different, same or combination of the prior controller) are operative to schedule the third plurality of UE devices (such as UE device 1514) to transmit according to a null transmission mode during at least a portion of a second BS 1201 scheduled transmission. Further, the first BS 1200 is operative to
30 characterize interference at a least a portion of the null scheduled transmission. For an embodiment, a null transmission mode includes not assigning any of the third plurality of UE devices any transmission resources.

/*[C21-C26] 500 Series

For at least some embodiments, the selecting of the third BS is based on one or more of a
5 physical proximity (for example a physical proximity below a threshold distance) of the third BS
or the third plurality of UE devices relative to the first BS 1200, being a designated as a neighbor
of the first BS 1200, being within a coverage area of the first BS 1200, a classification of the
third BS and the first BS 1200. For an embodiment, the third BS is selected based on an estimate
10 of interference generated from one or more of the third plurality of UE devices to the first BS
1200 being above a threshold. For an embodiment, selecting the third BS is based on an
interference estimate. For an embodiment, the interference estimate is based on at least one of a
distance between at least one of the third plurality of UE devices and first BS 1200, a path loss
model applied to at least one of the third plurality of UE devices and the plurality of UE devices,
a propagation loss application, an interference measurement data, an interference estimate by
15 first BS 1200. An embodiment further includes characterizing, by the first BS 1200, interference
during the null transmission mode at the at least the second portion of the scheduled
transmission. For an embodiment, the characterizing occurs during null transmission of BS and
third bUE device. For an embodiment, the first BS 1200 is configured to jointly characterize an
interference contribution of at least one of the third plurality of UE devices and at least one of the
20 second plurality of UE devices (such as, UE devices 1511, 1512) during the null transmission
mode of the at least the second portion of the scheduled transmission. For an embodiment, the
characterizing occurs during null transmission of BS and third BS.

/*JT No claims yet, insert at end of spec

25

For at least one embodiment a BS (such as BS 201) includes a plurality of sectors
wherein the plurality of bUE devices (such as, bUE devices 210, 211) are distributed over the
plurality of sectors and access traffic from a UE device (such as, UE device 212) associated with
the BS is wirelessly communicated over one or more of the plurality of bUE devices. For an
30 embodiment the BS may include three sectors and the plurality of bUE devices may include two
bUE devices located within the coverage area of a first sector of the three sectors and access
traffic from a UE device located within the coverage area of a second sector of the three sectors

may be wirelessly communicated over the at least one of the two bUE devices located within the coverage area of the first sector.

For an embodiment a BS may include three sectors and the plurality of bUE devices may
5 include two bUE devices located within the coverage area of a first sector and a second sector of
the three sectors and access traffic from a UE device located within the coverage area of one of
the three sectors may be wirelessly communicated over the at least one of the two bUE devices
located within the coverage area of the first sector and second sectors. Clearly other
embodiments are possible wherein the access traffic of a UE device may be wirelessly
10 communicated over two or more bUE devices that are within the same sector as the UE device, a
different sector than the UE device or both the same sector and a different sector as the UE
device.

For at least one embodiment a BS (such as BS 201) includes a plurality of channels
15 wherein the plurality of bUE devices are distributed over the plurality of channels and access
traffic from a UE device associated with the BS is wirelessly communicated over one or more of
the plurality of bUE devices. For an embodiment a BS may include three channels and the
plurality of bUE devices may include two bUE devices located within the first channel of the
three channels and access traffic from a UE device associated with the second channel of the
20 three channels may be wirelessly communicated over the at least one of the two bUE devices
associated with the first channel. For an embodiment a BS may include three channels and the
plurality of bUE devices may include two bUE devices associated with a first channel and a
second channel of the three channels and access traffic from a UE device associated with one of
the three channels may be wirelessly communicating over the at least one of the two bUE
25 devices associated with the first channel and the second channel. Clearly other embodiments are
possible wherein the access traffic of a UE device may be wirelessly communicating over two or
more bUE devices that are within the same channel as the UE device, a different channel than the
UE device or both the same channel and a different channel as the UE device.

30 For at least one embodiment a BS includes a plurality of sectors and a plurality of
channels and the plurality of bUE devices are assigned resources from the plurality of sectors
and a plurality of channels and the plurality of bUE devices and a particular UE device of the one

or more UE devices is assigned one or more bUE devices for the plurality of bUE devices that could be in the same sector and/or channel or a different sector and/or channel.

For at least one embodiment (for example embodiments associated with Figure 3) the bUE device (such as bUE device 210) may be selected to wirelessly communicate troubleshooting or fault isolation information. For at least one embodiment the backhaul WCT 220 wireless communication path is used to transmit access traffic when backhaul CT 332 path is not operating correctly or to detect if backhaul CT 332 path is operating correctly. For at least one embodiment the backhaul WCT 220 wireless communication path is used to transmit control information to help isolate a source of a backhaul communication to Data network 340 over backhaul CT 332 is operating within a threshold or to isolate which of the one or more of the BS (such as 301) or the access WCT 222 or the data network 340 are operating with a threshold of performance. For at least one embodiment, the bUE device is used to diagnose a BS (such as BS 301) remotely. For example one or more control information may be sent over backhaul WCT and backhaul CT 220 and diagnosed at one or more data network locations. For example the bUE device (for example a smartphone) may be a UE device with cellular and WiFi connectivity and the WiFi backhaul path wirelessly communicating to data network 241 may be used to verify a performance parameter (or alternatively a fault) of the cellular access WCT 222.

For at least one embodiment a first backhaul path including a backhaul CT (such as 332) includes circuit switched connectivity (for example TDM, T1) and a second backhaul path including backhaul CT (such as 230) includes packet switched (for example IP, Ethernet) connectivity. For at least one embodiment access traffic associated with a UE device 212 is used to select a first backhaul path or a second backhaul path based on circuit switched or packet switched backhaul.

For at least one embodiment a first backhaul path (such as 332) includes legacy backhaul CT (for example T1) and a second backhaul path (such as 230) includes subsequent generation based backhaul CT (for example VDSL). For at least one embodiment, access traffic associated with a UE device 212 is used to select a first backhaul path or a second backhaul path based on legacy or subsequent generation based backhaul.

For at least one embodiment a first backhaul path (such as 332) parameters are suited for legacy access traffic (for example 2G voice traffic) and a second backhaul path (such as 230) parameters are suited for subsequent generation access traffic (for example 4G data). For at least one embodiment, access traffic associated with a UE device 212 is used to select a first backhaul path or a second backhaul path based on legacy or subsequent generation access traffic.

For at least one embodiment backhaul CT 230 over bUE device 210 is selected for improving resilience (or alternatively as a backup) for the primary backhaul CT 332 to data network 340 or as an alternative route for BH. For at least one embodiment backhaul CT 230 over bUE device 210 is selected as a temporary or interim deployment during the upgrade or ramp up or installation of backhaul CT 332 to data network 340.

For at least one embodiment one or more of a first access WCT includes one or more first QoS parameters, a first backhaul WCT includes one or more second QoS parameters and a first backhaul CT includes one or more third QoS parameters and a mapping (or alternatively a conversion or best fit) between at least two out of the first, second or third QoS parameters is required.

For at least one embodiment (for example Figure 5) a handoff between a first BS and a second BS is based on a bUE device. For example UE device 520 is wirelessly communicating to Data network 550 over BS 500 and backhaul 540. For at least one embodiment based on one or more parameters associated with BS 510 to data network 551 (such as a parameter associated with backhaul WCT 531 or backhaul CT 541) a UE device 520 could be handoff from BS 500 to BS 510 (for example if UE device 520 requests a data communication that could be better handled by the backhaul path to data network 551). For at least one embodiment one or more of a network entity (for example cloud or BS controller) or BS or UE device is aware of a backhaul parameter prior to (or during) one or more of associating a UE device to a BS, handover or handoff of UE device to a BS. For at least one embodiment the backhaul parameter includes one or more of a carrier core network backhaul or a carrier partner core network backhaul or a roaming backhaul core network. For at least one embodiment the handover or handoff of a UE device to a BS wirelessly communicating backhaul traffic over a bUE device is based on a

backhaul CT ownership (for example carrier owned or partner carrier owned or owned by a roaming network carrier).

For at least one embodiment (for example embodiments associated with Figure 3 or Figure 2) the backhaul WCT 220 includes a wireless communication mode that could be differentiated from the access WCT 222. For at least one embodiment the mode could be a differentiated MCS (for example a higher modulation and/or code rate and/or bits/sec/Hz) or a differentiated MIMO or SIC or beamforming mode (for example additional MIMO streams, additional number of transmit or receive antennas for bUE device) or differentiated ARQ scheme (for example larger buffers, block ARQ, intermediate MAC termination point) or differentiated control message or differentiated control code or a differentiated scheduling (for example reserved or special RB). For at least one embodiment the mode could enable simultaneous or joint access and backhaul WCT transmission (for example with differentiated frame control indicators). For at least one embodiment the mode includes a more robust modulation and coding for overcoming channel impairments and/or interference or allocating high priority queues to improve on mean access delay (for example reducing backhaul traffic latency below a threshold). For at least one embodiment the mode includes a transmit power level (for example a lower transmit power to reduce backhaul WCT interference to access WCT links).

For at least one embodiment the mode may enable MU-MIMO or beamforming between a UE device and bUE device on the same BS resource. For at least one embodiment the mode includes specialized symbols (for example training, reference symbols, control) for the backhaul CT. For at least one embodiment the mode includes differentiated link adaptation, resource allocation or scheduling of wireless communication resources to the backhaul WCT (for example due to differentiated channel characteristics—better LoS or K-factor or better antennas). For at least one embodiment backhaul WCT has differentiated for interference generation (transmission) or interference characterization (for example estimation) or interference suppression (for example reception cancellation algorithms). For at least one embodiment the mode enables scheduling of super-position frames wherein access and BH traffic overlap on one or more time, frequency, code resources (for example using single or multiple antennas).

For at least one embodiment (for example embodiments of Figure 2) two or more backhaul paths (over bUE device 210 and bUE device 211) may be used for backhaul diversity

(for example for traffic load balancing, channel or interference diversity). For at least one embodiment (for example embodiments of Figure 2) two or more backhaul paths (over bUE device 210 and bUE device 211) may include, more than one WCT (for example WiFi and cellular, 3G and 4G).

5

For at least one embodiment channel and/or interference information associated with bUE device embodiments (for example embodiments of Figure 2) are communicated to a cloud or network entity (for example cloud RAN or cloud BTS or multi-BTS control) based interference monitoring & mitigation in order to select one or more of frequency channel,
10 resource allocation, scheduling for backhaul traffic. For at least one embodiment one or more bUE devices include better interference monitoring and/or cancellation and/or mitigation than the UE device. For at least one embodiment wireless communications resource (channels, resource allocation, transmit power level) monitoring and/or assignment algorithms for backhaul WCT are centralized. For at least one embodiment wireless communications resource (channels,
15 resource allocation, transmit power level) monitoring and/or assignment algorithms for backhaul WCT are distributed.

For at least one embodiment a resource allocation (for example one or more of a frequency channel allocation, a frequency channel reuse, a SFR, a FFR) of a wireless
20 communication resource is based on one or more bUE devices or one or more bUE parameters, which are differentiated relative to at least a subset of the plurality UE device or plurality of UE device parameters. For example the bUE device may include additional transmit or receiver analog (such as number of antennas, antenna gain) or baseband capability (such as transmit precoding, interference cancelling) that allow for more aggressive use of wireless
25 communication resources. For at least one embodiment the resource allocation jointly assigns resources to backhaul and access traffic with differentiated parameters used in the assignments. For at least one embodiment a backhaul traffic to a bUE device has preferential treatment (for example higher priority) relative to access traffic in a scheduling assignment. For at least one embodiment a backhaul traffic has differentiated QoS parameters relative to access traffic QoS
30 parameters wherein one or more of the resource allocation, scheduling and link adaptation are based on differentiated QoS parameters. For at least one embodiment the backhaul traffic QoS parameters are based on the associated access traffic QoS parameters. For at least one

embodiment the backhaul QoS parameters are consistent and/or coordinated between the UE device and the associated BS or the associated bUE device. For at least one embodiment the interference characterization includes (or alternatively accounts for) transmit or receive interference processing capability (for example a transmit precoding or dirty paper coding or a receiver nulling or successive interference cancelling). For at least one embodiment resource allocation (or scheduling or link adaptation) is based on the interference characterization including transmit or receive interference processing capability. For at least one embodiment interference characterization matrices associated to a plurality of transmit nodes (for example BS in the DL or UE device in the UL) and a plurality of receiver nodes are based on transmit or received interference mitigation capability. For at least one embodiment the resource allocation (or alternatively scheduling) of one or more of access traffic or backhaul traffic associated with the access traffic is based at least in part on a revenue (or alternatively one or more of a cost or a profit or a service plan or a data plan) obtained from the access traffic data communication. For at least one embodiment the resource allocation (or scheduler) is based at least in part of on information obtained from DPI of the access or backhaul traffic (for example based on the content or the application or the service). For at least one embodiment the resource allocation (or alternatively scheduling) of one or more of access traffic or backhaul traffic associated with the access traffic is based at least in part on a sponsored service or application (or alternatively a revenue share or a special or a coupon or a zero-rated or a good customer status) obtained from the access traffic data communication.

For at least one embodiment (for example embodiments associated with Figure 3), access traffic associated with UE device 212 is backhauled over a bUE device 210 to data network 241 or backhaul CT 332 to data network 340 based on energy efficiency of one or more elements of the system (for example battery state or energy consumption of bUE device 210 or BS 301, etc.).

For at least one embodiment a receiver (for example a UE device) stores interference information (for example raw samples or post-processed received signal and/or noise symbols) from one or more of reference symbols (RS), control symbols and data symbols, and receives from a link partner (for example a BS) interference activity scheduling information (for example active transmission mode RB, on/off tables, null intervals), and refines interference characterization based on stored interference information and (delayed) interference activity

scheduling information. For at least one embodiment the interference activity scheduling information may be delayed.

For at least one embodiment a receiver storing interference information reduces a
5 requirement (such as latency, BW) on the backhaul for exchange of control messages between one or more of a BS or one or more UE device. For example control messages may be compressed (for example one or more of on/off, power control, BF, MIMO parameters). For at least one embodiment a receiver stored interference information includes a first covariance matrix, and based on an interference activity scheduling information including information based
10 on a interference source configuration, the receiver refines the first covariance matrix to a second covariance matrix. For at least one embodiment a receiver computes a plurality of covariance matrix (for example a first covariance matrix based on the leading 25% of received frame, and a second covariance matrix based on the leading 75% of received frame) and based on interference activity scheduling information from neighbor BS may obtain a new covariance matrix based on
15 the plurality of covariance matrices.

For at least one embodiment a resource allocation or scheduler agent (for example executed by a BS controller) clusters (for example allocates contiguous frequency and/or time resource blocks) transmission modes within a transmission frame (for example DL or UL frames
20 or sub-frames). For example a first set (or alternatively group or cluster or classification) of transmission time slots (or alternatively time and/or frequency RBs) may be assigned a beamforming transmission mode, followed by a second set of transmission time slots assigned a MIMO (multiple input, multiple output) transmission mode, followed by a third set of transmission time slots assigned a SISO (single input, single output) transmission mode,
25 followed by empty slots. In at least a second embodiment a first set of RB may include transmission at a maximum transmit power level, followed by a median transmit power level, followed by a minimum transmit power level. Other group classifications criteria may be based on one or more of path loss (for example for UL), MCS, transmit power, number of transmit antennas, SFR, FFR. For at least one embodiment a plurality of UE device (or bUE device) may
30 be classified into sets based on path loss, for example with high path loss UL UE (which typically will transmit higher power) transmitting the first cluster of RB, followed by typical path loss UE, followed by low path loss UE.

For at least one embodiment a plurality of UE devices (or bUE devices) may be classified into sets based on distance to a BS (or location relative to two neighboring BS), for example cell edge UL UE (which typically will transmit higher power and/or often interfere with a
5 neighboring BS) transmitting the first cluster of RB, followed by median cell UE device, followed by close-in UE device.

For at least one embodiment classifying transmission mode into clusters reduces the variation of interference generated or received over time or enables more predictable interference
10 levels versus frame location (for example time and/or frequency RB relative to frame boundaries) making scheduling or link adaptation more robust based on frame location interference characterization information. For at least one embodiment reduced interference variation based on transmission mode clustering enables resource allocation (for example frequency channel assignments, SFR, FFR) to be allocated at larger time intervals (for example
15 higher latency feedback, more accurate estimators, larger time constant assignments—for example at central or distributed controller at a cloud node). For at least one embodiment a resource allocation or schedulers is based on an inner and outer loop control. For example outer loop (typically resource allocation agent) based on longer term S and/or I statistics, and inner loop (typically scheduler) based on instantaneous channel or queue status.

20

For at least one embodiment a bUE device is managed (or alternatively controlled) at least in part by a user (for example a cellular subscriber). For at least one embodiment a user may one or more of allow, block, restrict, a bUE functionality. For example a bUE user (or subscriber) may limit the amount of backhaul traffic communicating over the bUE device. For at
25 least one embodiment the bUE device may restrict the amount of backhaul traffic based on bUE state (for example battery state or a data plan associated with the bUE WCT or CT). For at least one embodiment the bUE device includes a user policy. For example a UI for user notification of bUE information (status, usage, battery usage or projections, etc.), user control (for example one or more of request for permission, approval, block, restrict, allow, throttle, shape) or offers
30 to the user, such as a data plan sponsor. For at least one embodiment the user-managed bUE device is sponsored or awards credits and/or points to the user.

For at least one embodiment a wireless access provider (or WCT provider) pays (or alternatively compensates or is billed by) a second CT provider (for example a cellular carrier may compensate a DSL and/or cable service provider backhauling data through the bUE device). For at least one embodiment, revenue generated from access traffic over backhaul CT is revenue-
5 shared between the WCT provider and one or more backhaul CT provider or some other partnership.

It should be understood that any of the embodiments of the described embodiments can be implemented in the form of control logic using hardware and/or using computer software in a
10 modular or integrated manner. Based on the disclosure and teachings provided herein, a person of ordinary skill in the art will know and appreciate other ways and/or methods to implement embodiments of the described embodiments using hardware or a combination of hardware and software.

Any of the software components or functions described in this application may be
15 implemented as software code to be executed by a processor using any suitable computer language such as, for example, Java, C++ or Perl using, for example, conventional or object-oriented techniques. The software code may be stored as a series of instructions or commands on a computer readable medium for storage and/or transmission, suitable media include random access memory (RAM), a read only memory (ROM), a magnetic medium such as a hard-drive or
20 a floppy disk, or an optical medium such as a compact disk (CD) or DVD (digital versatile disk), flash memory, and the like. The computer readable medium may be any combination of such storage or transmission devices.

Such programs may also be encoded and transmitted using carrier signals adapted for transmission via wired, optical, and/or wireless networks conforming to a variety of protocols,
25 including the Internet. As such, a computer readable medium according to an embodiment of the described embodiments may be created using a data signal encoded with such programs. Computer readable media encoded with the program code may be packaged with a compatible device or provided separately from other devices (e.g., via Internet download). Any such computer readable medium may reside on or within a single computer program product (e.g. a
30 hard drive, a CD, or an entire computer system), and may be present on or within different computer program products within a system or network. A computer system may include a

monitor, printer, or other suitable display for providing any of the results mentioned herein to a user.

Any of the methods described herein may be totally or partially performed with a computer system including a processor, which can be configured to perform the steps. Thus, 5 embodiments can be directed to computer systems configured to perform the steps of any of the methods described herein, potentially with different components performing a respective steps or a respective group of steps. Although presented as numbered steps, steps of methods herein can be performed at a same time or in a different order. Additionally, portions of these steps may be used with portions of other steps from other methods. Also, all or portions of a step may be 10 optional. Additionally, any of the steps of any of the methods can be performed with modules, circuits, or other means for performing these steps.

The specific details of particular embodiments may be combined in any suitable manner without departing from the spirit and scope of embodiments of the invention. However, other embodiments of the invention may be directed to specific embodiments relating to each 15 individual aspect, or specific combinations of these individual aspects.

The above description of exemplary embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form described, and many modifications and variations are possible in light of the teaching above. The embodiments were chosen and described in order to best 20 explain the principles of the invention and its practical applications to thereby enable others skilled in the art to best utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated.

CLAIMS

/*300 Series

What is claimed:

1. [P1] A method, comprising:
 - determining a plurality of link qualities (LQs) of a user equipment (UE) for a plurality of positionings of the UE, wherein at least one of the plurality of positionings includes at least a location or an orientation of the UE;
 - storing information associated with the plurality of LQs for the plurality of positionings;
 - estimating at least one future positioning of the UE; and
 - estimating a future link quality (LQ) of the UE at the at least one future positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the UE.
2. [P4] The method of claim 1, wherein at least one of the future LQ or the plurality of LQs comprises one or more of a path loss (PL), S, I, SNR, SINR, SIR, CQI, CSI, PER.
3. [P4] The method of claim 1, wherein at least one of the future LQ or the information associated with the plurality of LQs is associated with an uplink or downlink transmission.
4. [P4] The method of claim 1, wherein at least one of the future LQ or the plurality of LQs is associated with a frequency band or a frequency channel.
5. [P4] The method of claim 1, wherein at least one of the future LQ or the plurality of LQs is associated with a wireless communication technology.

6. [P3] The method of claim 1, wherein at least one of the future LQ or the plurality of LQs is associated with a link partner of the UE.
7. [P2] The method of claim 1, wherein a link quality positioning information includes at least one of the determined plurality of LQs, the stored information, the estimated future positioning or the estimated future LQ.
8. [P2] The method of claim 7, wherein the UE obtains at least a portion of the link quality positioning information from a link partner.
9. [P2] The method of claim 7, wherein the UE communicates at least a portion of the link quality positioning information to a link partner.
10. [P2] The method of claim 1, further comprising allocating a resource to a UE link, wherein the allocation of the resource to the UE link is based on the estimated future LQ.
11. [P3] The method of claim 10, wherein the resource is one or more of a carrier, a frequency channel, a resource block, a time slot, a frequency band, a code.
12. [P2] The method of claim 1, further comprising selecting a transmission mode for a UE link, wherein the selecting the transmission mode for the UE link is based on the estimated future LQ.
13. [P3] The method of claim 12, wherein the transmission mode comprises one or more of a modulation, a code, a modulation and coding scheme (MCS), a MIMO mode, a beamforming parameter, a transmit power.
14. [P2] The method of claim 1, further comprising obtaining at least one future time, and wherein the estimating the at least one future positioning is based on the at least one future time.
15. [P2] The method of claim 1, further comprising a second plurality of positionings wherein the second plurality of positionings comprises the at least one future positioning,

and further comprising estimating a second plurality of LQs based on the second plurality of positionings.

16. [P3] The method of claim 15, wherein the second plurality of positionings comprises a current positioning.
17. [P3] The method of claim 15, further comprising allocating a resource block (RB) to a UE link based on the estimated second plurality of LQs.
18. [P3] The method of claim 1, wherein the plurality of positionings is constrained to a physical area.
19. [P4] The method of claim 18, wherein the constrained physical area comprises one or more of at least a portion of a home, an office, or an office building.
20. [P3] The method of claim 1, wherein at least one of the plurality of positionings or the estimated at least one future positioning of the UE further comprises at least one of an error, an accuracy, a deformation, a velocity, an acceleration.
21. [P2] The method of claim 7, further comprising determining a UE usage information, wherein at least a portion of the link quality positioning information is based on the UE usage information.
22. [P4] The method of claim 21, wherein the UE usage information comprises UE information indicating one or more of a user handheld mode, a hands-free mode, a speaker phone mode, a car Bluetooth mode, a headset Bluetooth mode.
23. [P2] The method of claim 7, further comprising determining a UE environment information, wherein at least a portion of the link quality positioning information is based on the UE environment information.
24. [P3] The method of claim 23, wherein the UE environment information comprises information associated to one or more of a traffic load, a network load, an interference.

25. [P4] The method of claim 23, wherein the UE environment information comprises one or more time of day, whether information, day of year, season.
26. [P3] The method of claim 23, wherein the UE environment information comprises information associated with surrounding objects.
27. [P3] The method of claim 23, wherein the UE environment information comprises information associated with a user of the UE.
28. [P2] The method of claim 27, wherein the information associated with the user of the UE includes positioning of the user of the UE.
29. [P4] The method of claim 27, wherein the information associated with the user of the UE includes positioning of the user of the UE relative to the UE.
30. [P3] The method of claim 23, further comprising assisting determining the UE environment information using sensors of the UE.

31. [P1] A method, comprising:
- determining a plurality of link qualities (LQs) of a user equipment (UE) for a plurality of positionings of the UE, wherein at least one of the plurality positioning includes at least a location or an orientation of the UE;
 - storing information associated with the plurality of LQs for the plurality of positionings;
 - estimating at least a positioning of the UE;
 - determining at least one neighboring positioning of the positioning of the UE; and
 - estimating a future link quality (LQ) of the UE at the at least one neighboring positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the UE.
32. [P3] The method of claim 31, further comprising adjusting or changing a configuration of the UE based on the future LQ.
33. [P2] The method of claim 31, further comprising presenting the future LQ of the UE at the at least one neighboring positioning.
34. [P2] The method of claim 31, further comprising selecting a candidate positioning from the at least one neighboring positioning based on the future LQ.
35. [P2] The method of claim 34, further comprising presenting the selected candidate positioning to a user of the UE.
36. [P2] The method of claim 31, wherein a link quality neighboring positioning information includes at least one of the determined plurality of LQs, the stored information, the estimated at least a positioning of the UE, the determined at least one neighboring positioning, or the future LQ.
37. [P2] The method of claim 36, further comprising determining a UE environment information, wherein at least a portion of the link quality neighboring positioning information is based on the UE environment information.

38. [P3] The method of claim 37, the UE environment information comprises information associated with a user of the UE.
39. [P3] The method of claim 37, further comprising selecting a joint candidate positioning of the UE and a user of the UE, wherein the joint candidate positioning comprises a combination of a UE positioning and a user positioning relative to the UE.
40. [P3] The method of claim 39, further comprising presenting the selected joint candidate positioning.

41. [P1] A user equipment (UE), the UE comprising:
- a transceiver operative to communicate with a link partner device through a communication link, wherein the communication link includes a link quality;
 - a controller, the controller operative to:
 - determine a plurality of link qualities (LQs) of the UE for a plurality of positionings of the UE, wherein at least one of the plurality of positionings includes at least a location or an orientation of the UE;
 - store information associated with the plurality of LQs for the plurality of positionings;
 - estimate at least one future positioning of the UE; and
 - estimate a future link quality (LQ) of the UE at the at least one future positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the UE.
42. A user equipment (UE), comprising:
- means for determining a plurality of link qualities (LQs) of a user equipment (UE) for a plurality of positionings of the UE, wherein at least one of the plurality of positionings includes at least a location or an orientation of the UE;
 - means for storing information associated with the plurality of LQs for the plurality of positionings;
 - means for estimating at least one future positioning of the UE; and
 - means for estimating a future link quality (LQ) of the UE at the at least one future positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the UE.
43. A system, comprising:
- a base station;
 - a user equipment (UE), the UE wirelessly communicating with the base station, wherein at least one of a controller of the base station or a controller of the UE is operative to:

determine a plurality of link qualities (LQs) of the UE for a plurality of positionings of the UE, wherein at least one of the plurality of positionings includes at least a location or an orientation of the UE;

store information associated with the plurality of LQs for the plurality of positionings;

estimate at least one future positioning of the UE; and

estimate a future link quality (LQ) of the UE at the at least one future positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the UE.

44. A method, comprising:

determining a plurality of link qualities (LQs) of a first user equipment (UE) for a plurality of positionings of the UE, wherein at least one of the plurality of positionings includes at least a location or an orientation of the first UE;

storing information associated with the plurality of LQs for the plurality of positionings;

estimating at least one future positioning of a second UE; and

estimating a future link quality (LQ) of the second UE at the at least one future positioning of the UE based on the stored information associated with the plurality of LQs at the plurality of positionings of the first UE.

ABSTRACT OF THE DISCLOSURE

Systems, methods, and apparatuses for estimating a user equipment link quality based
5 on a positioning of user equipment are provided. One method includes determining a plurality of
link qualities (LQs) of the user equipment (UE) for a plurality of positionings of the UE, wherein
at least one of the plurality of positionings includes at least a location or an orientation of the UE,
storing information associated with the plurality of LQs for the plurality of positionings,
estimating at least one future positioning of the UE, and estimating a future link quality (LQ) of
10 the UE at the at least one future positioning of the UE based on the stored information associated
with the plurality of LQs at the plurality of positionings of the UE.

BH Macro/Small cells (Micro/Pico/RN/Femto)

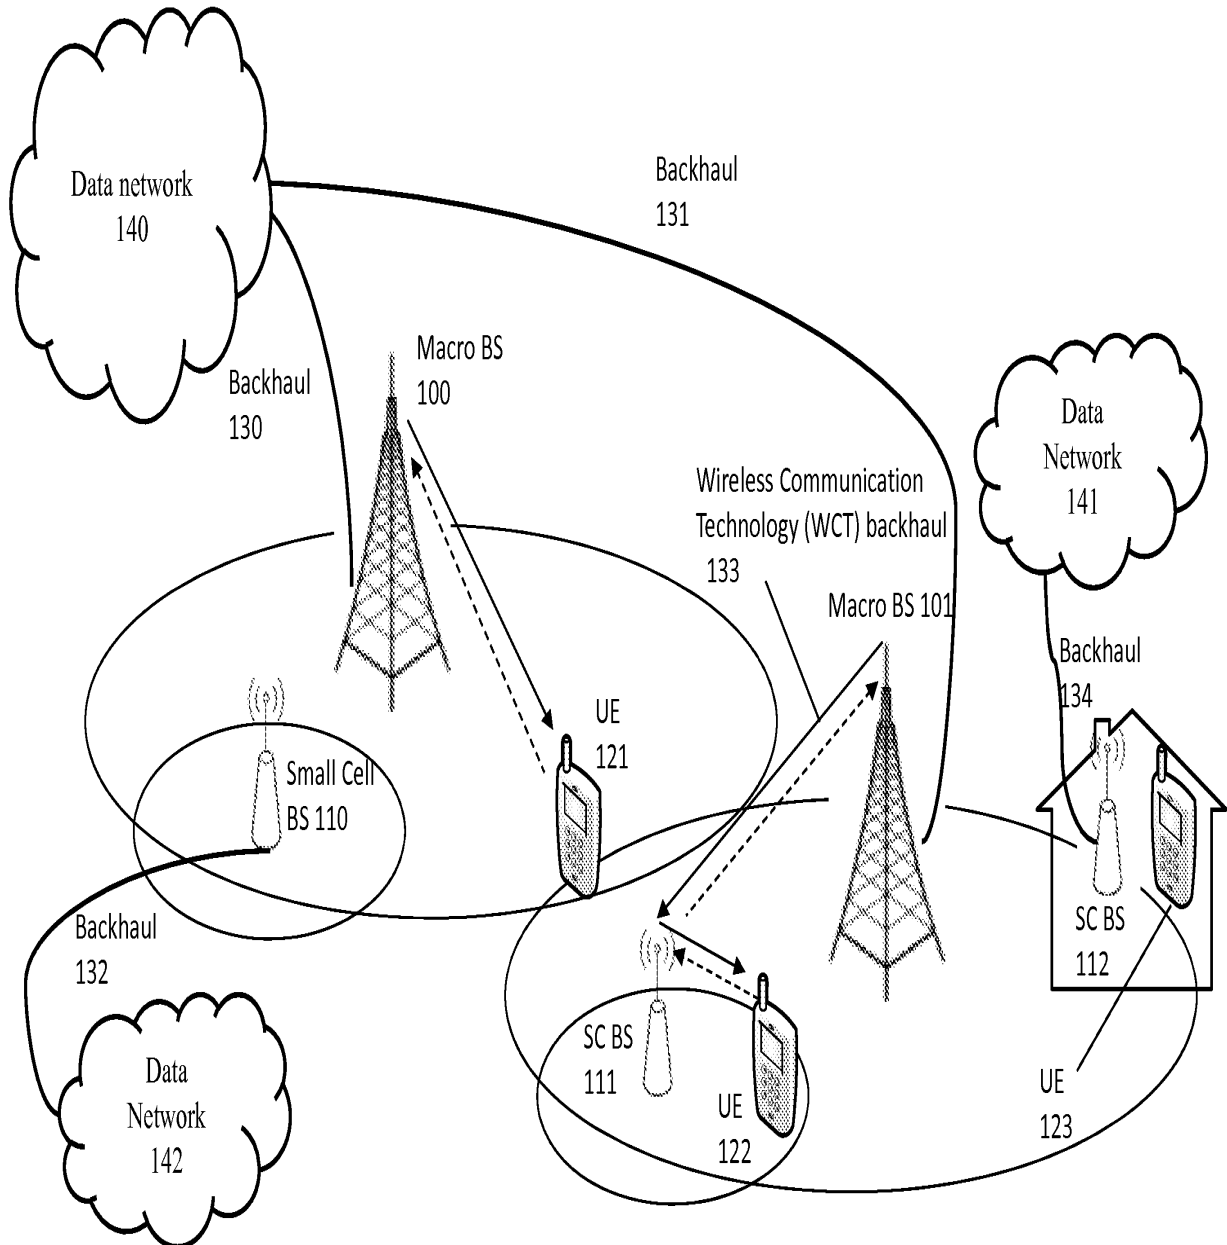


Figure 1

10/15/2012

C100, BS with plurality bUE

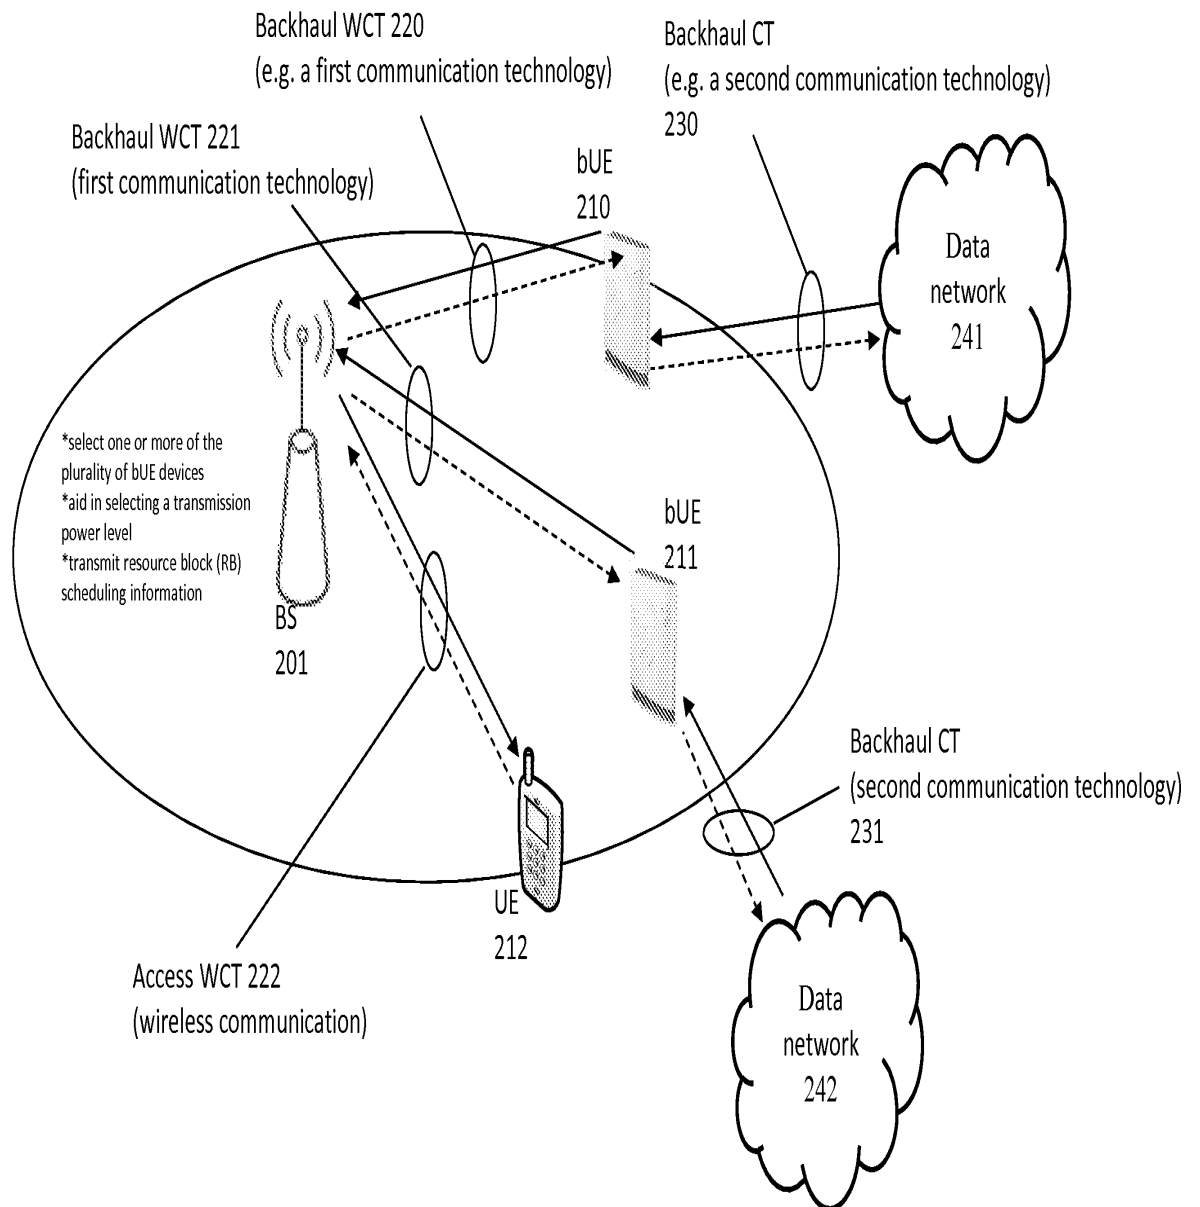


Figure 2

10/15/2012

C100b, BS with bUE + trad BH

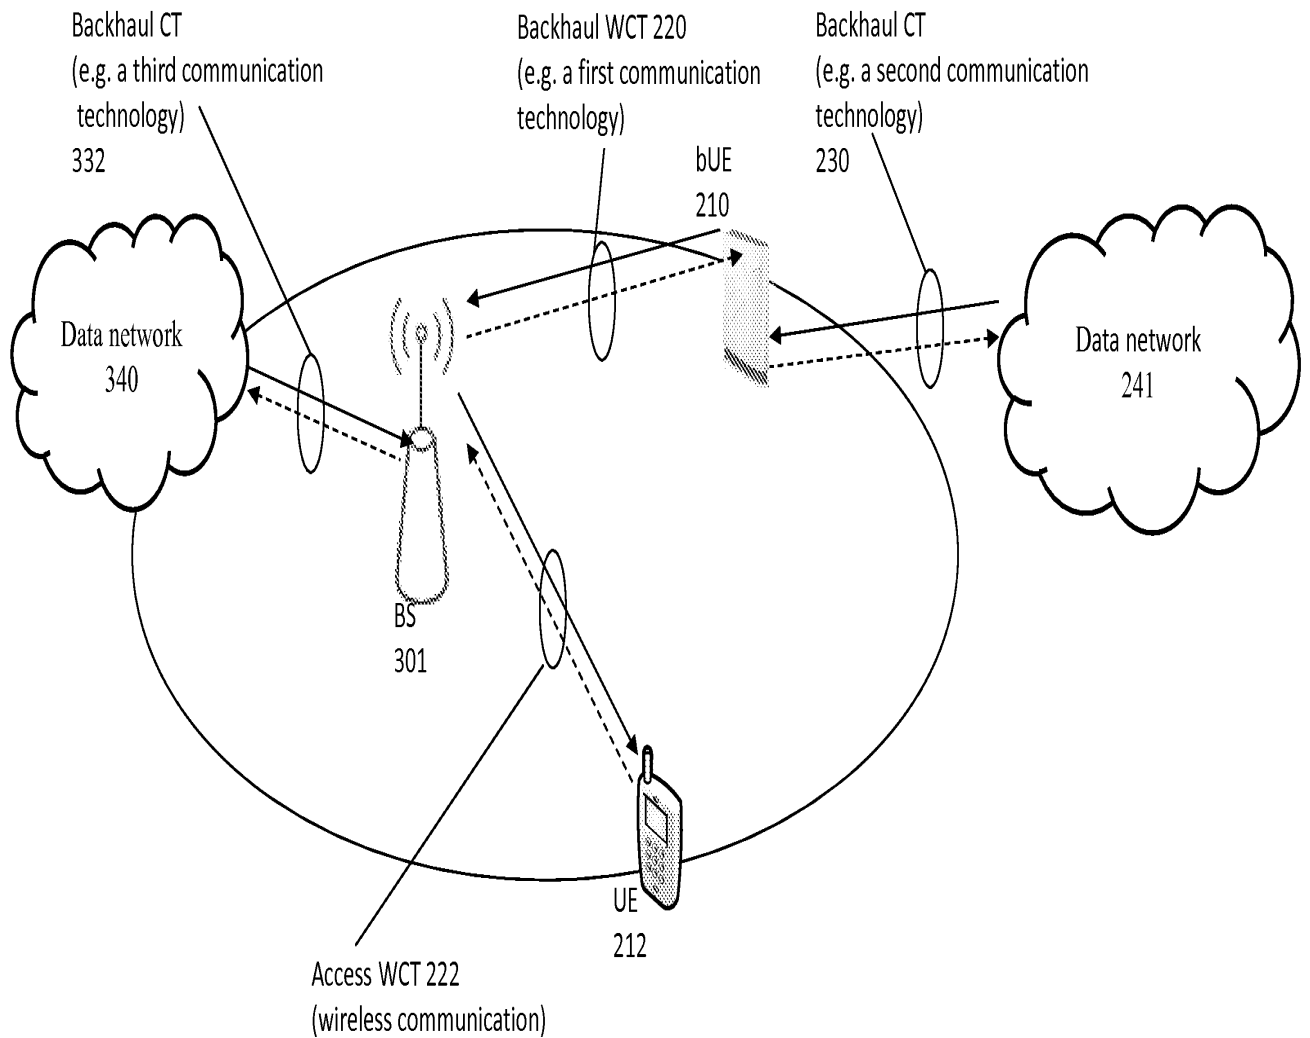


Figure 3

10/15/2012

C100c, BS with plurality bUE, each UE associated with paired bUE

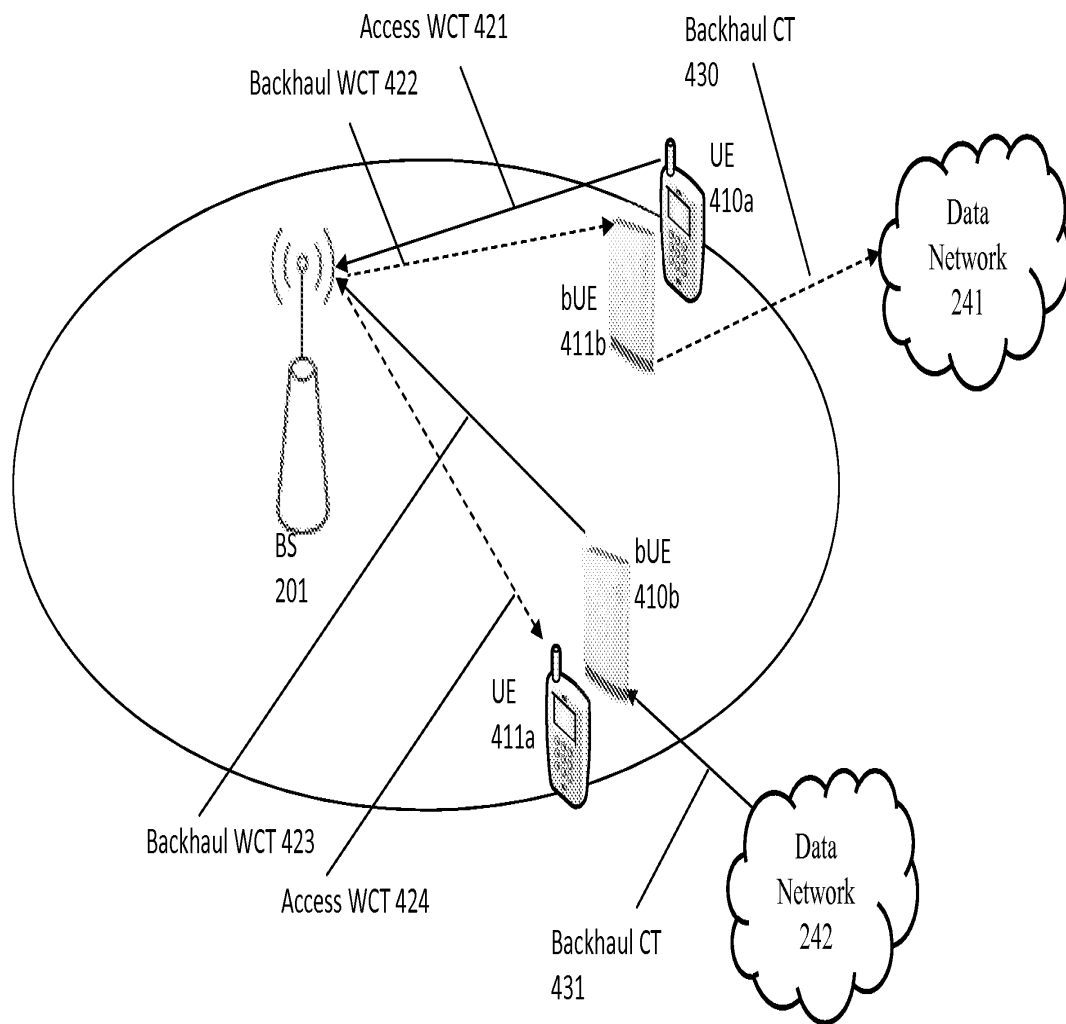


Figure 4

10/15/2012

C200, eRN with bUE

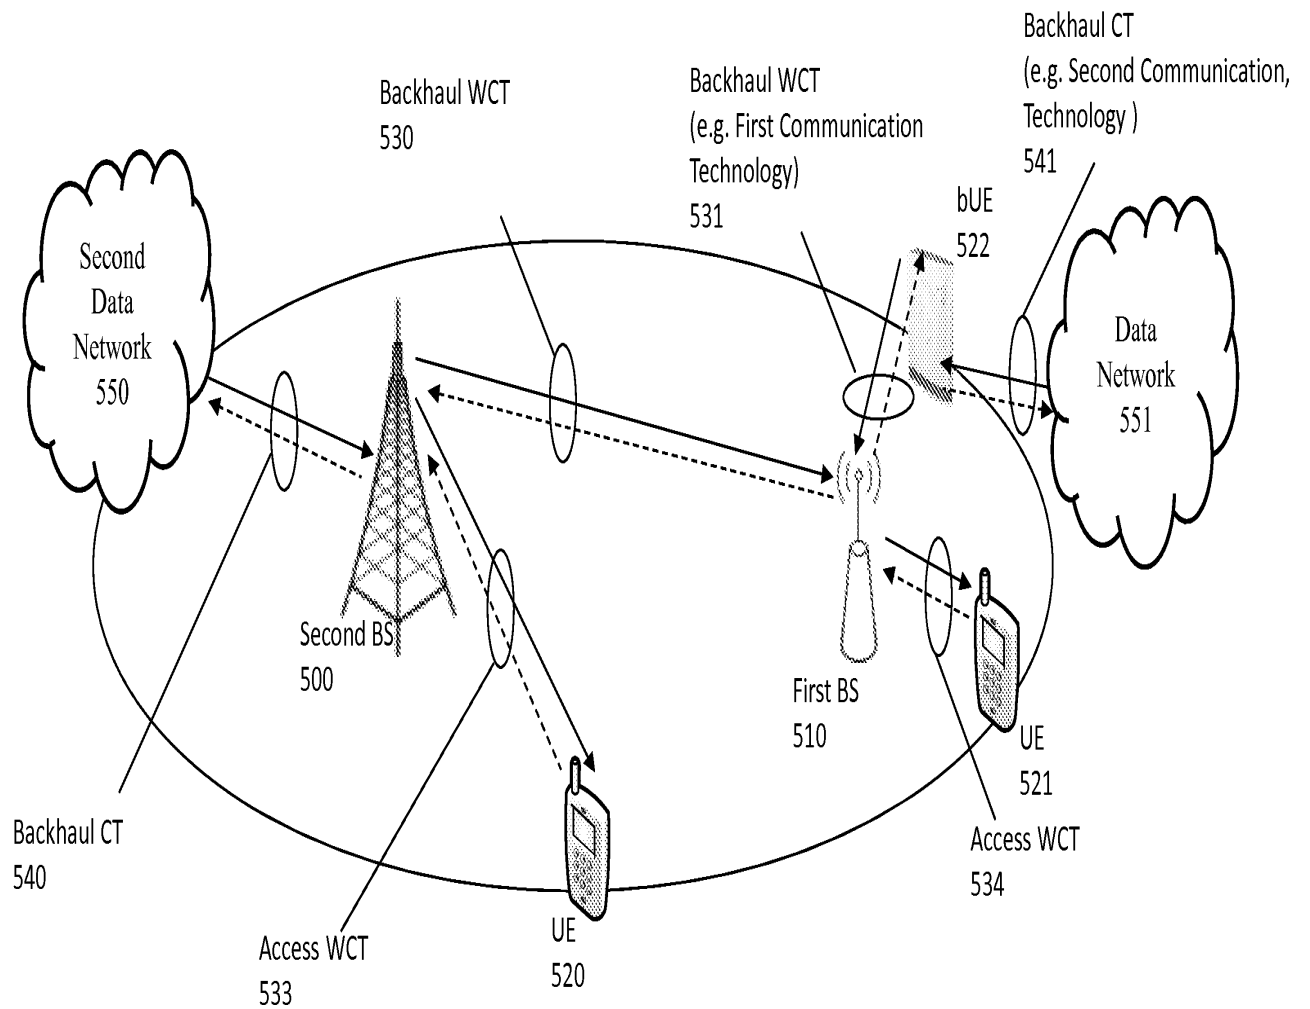


Figure 5

10/15/2012

C200b, eRN with plurality bUE

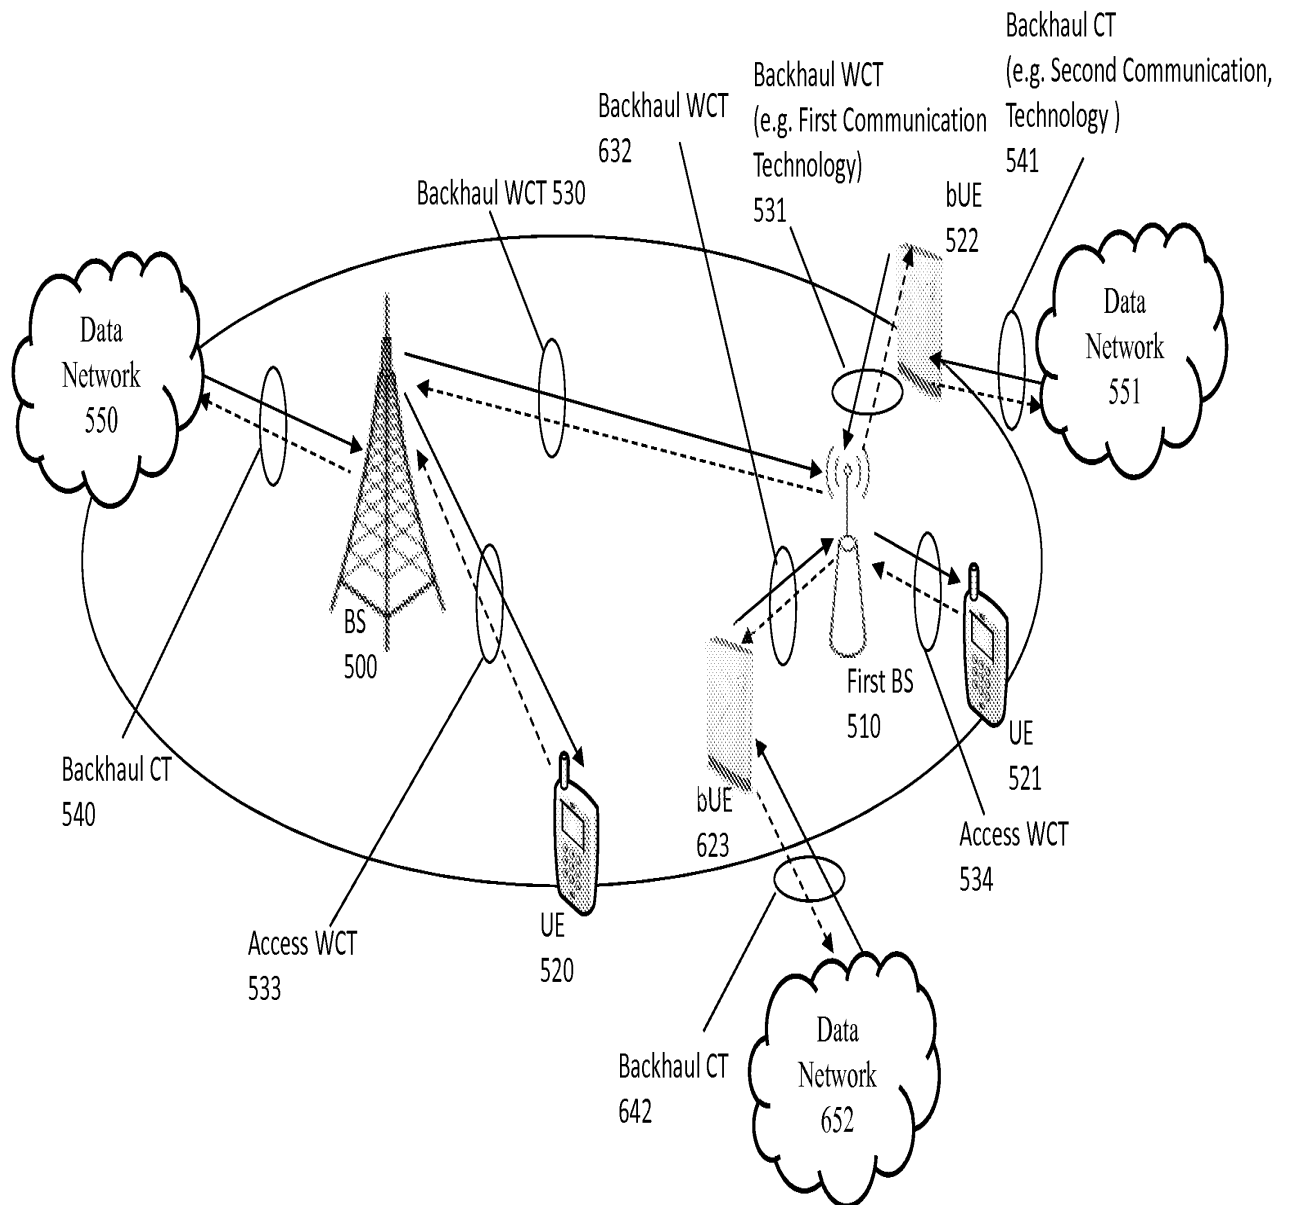


Figure 6

10/15/2012

C200c, epRN with bUE + partial standard BH

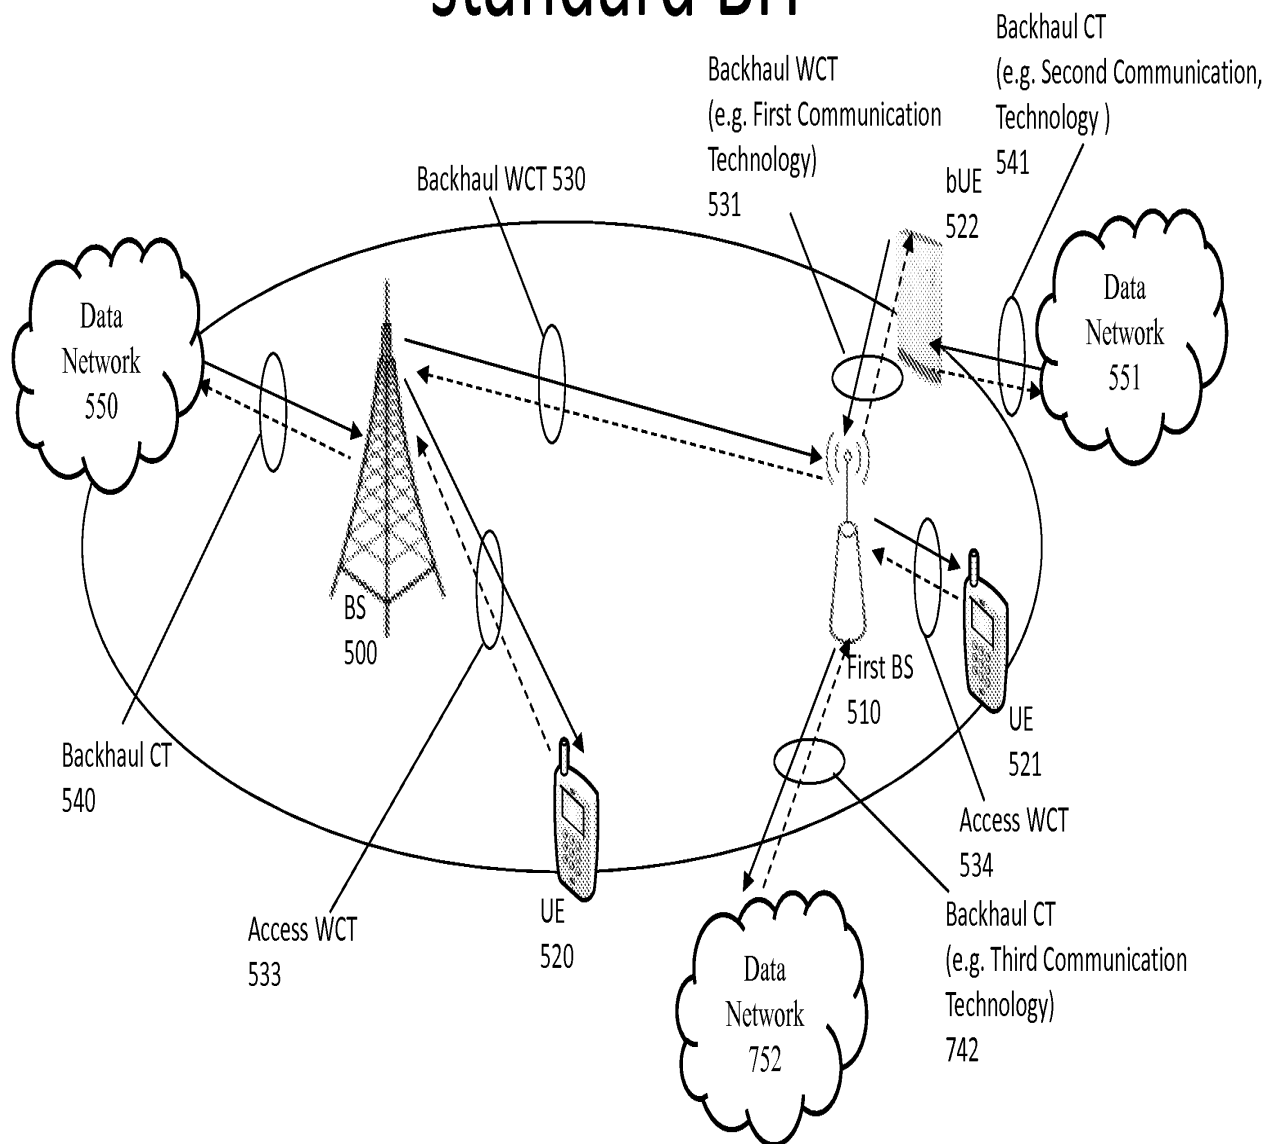


Figure 7a

10/15/2012

C200c, epRN with bUE + partial standard BH

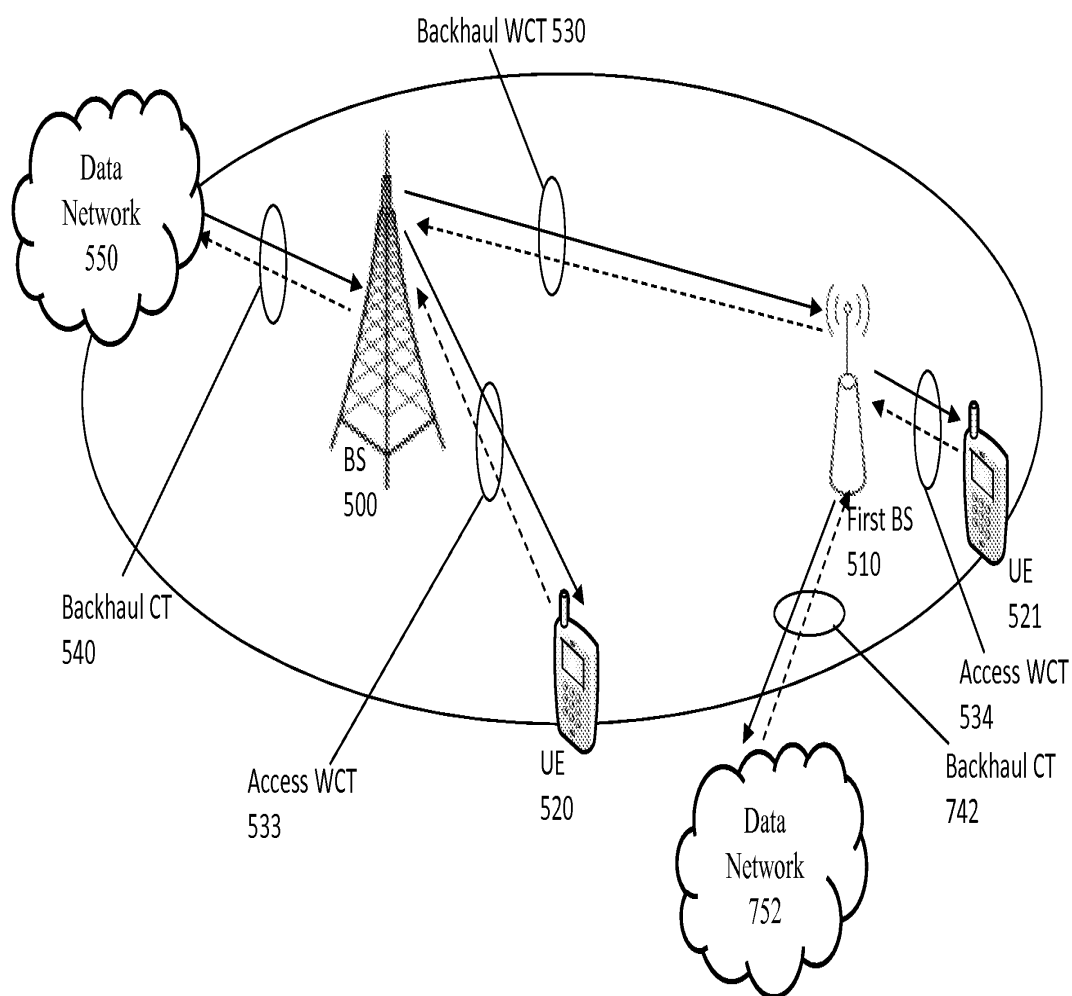


Figure 7b

10/15/2012

C300a, Link Quality prediction based on UE LQs history and future positioning

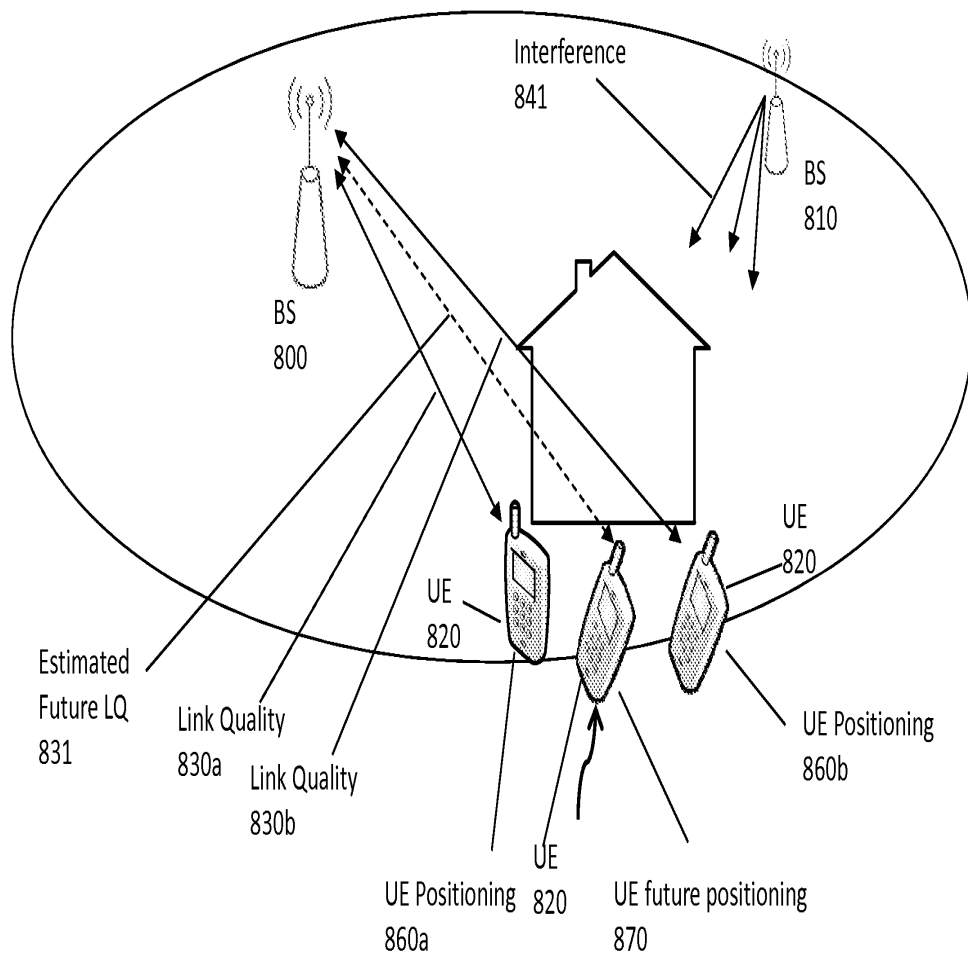


Figure 8

10/15/2012

C300b, UE Link Quality at neighbor positioning based on UE LQs history

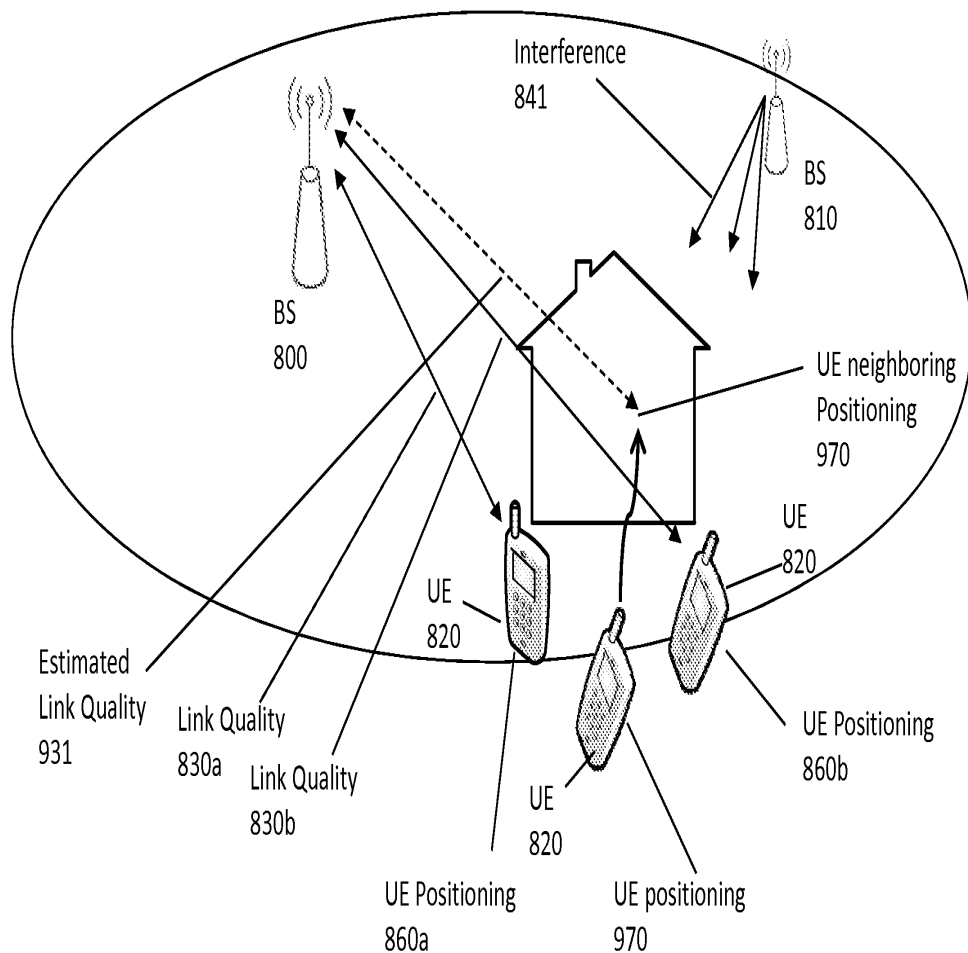


Figure 9

10/15/2012

10

C300c, Estimate future LQ at UE based on history/location/motion path

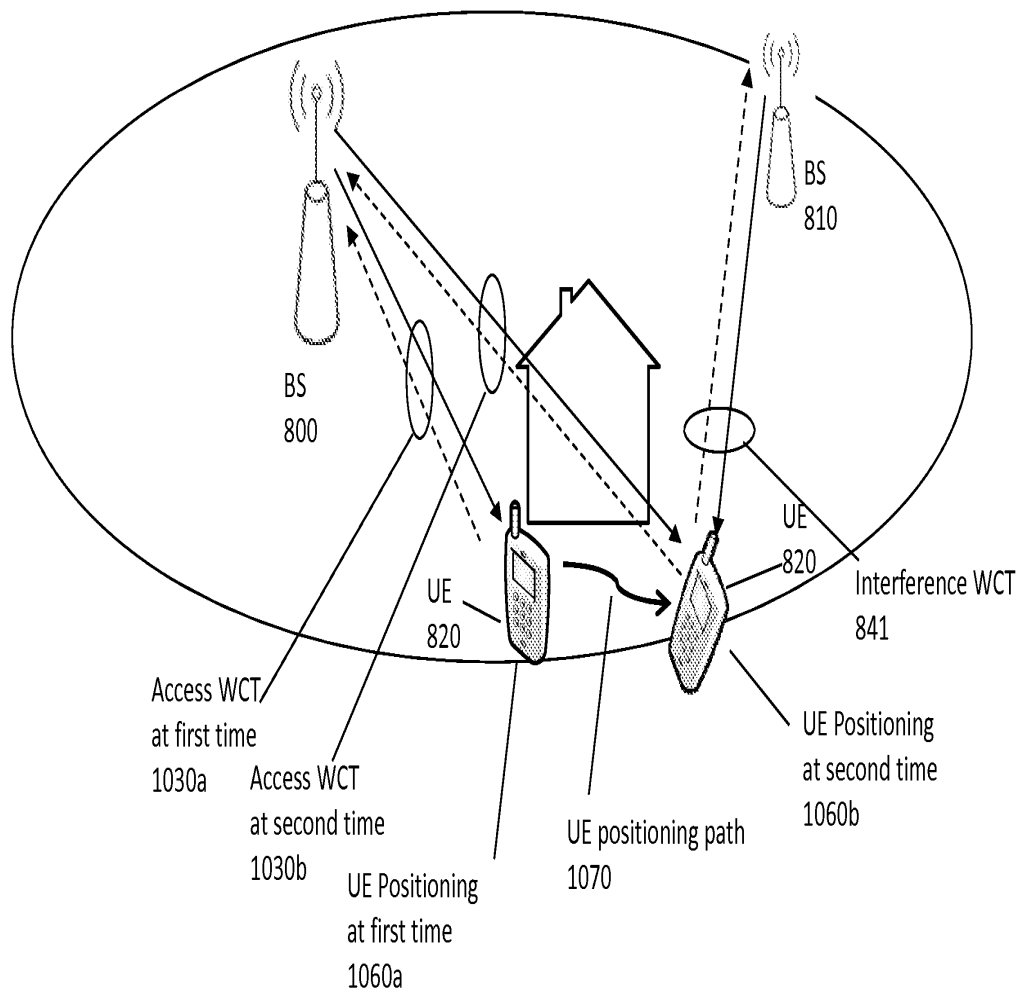


Figure 10

10/15/2012

11

C300d, second UE Link Quality prediction based on first UE history and second UE future positioning

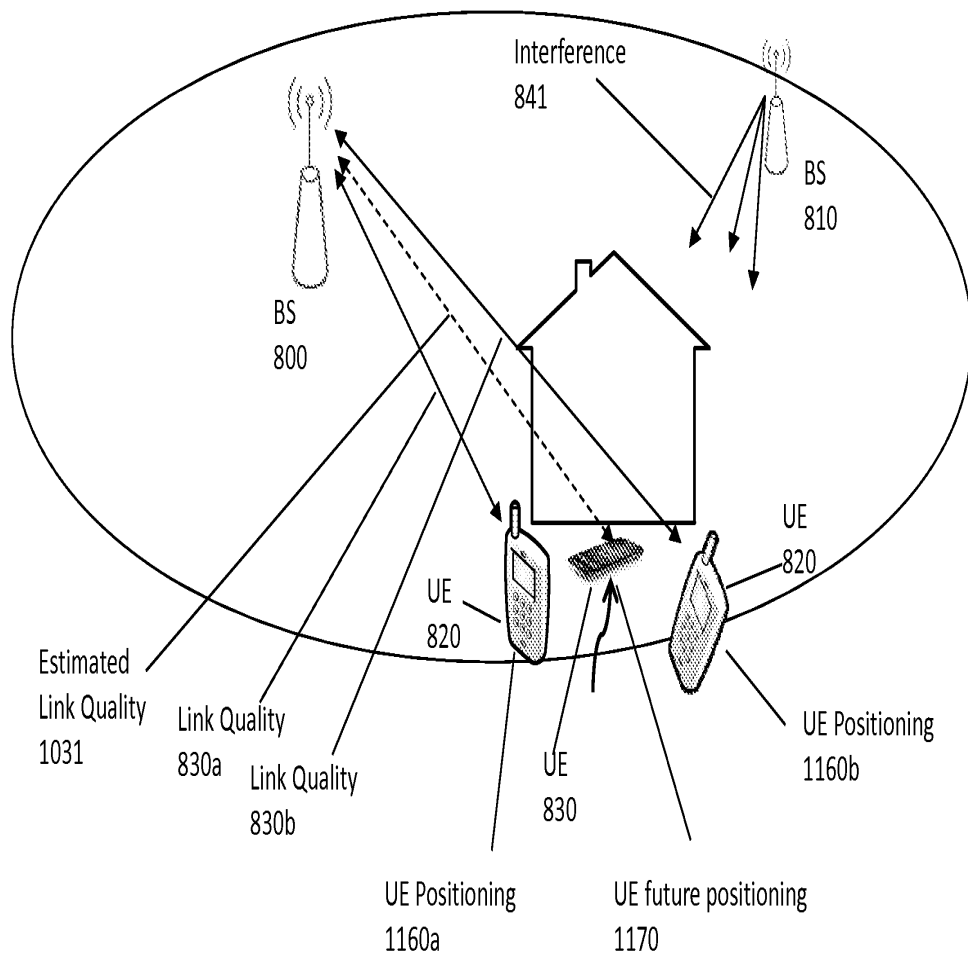


Figure 11

10/15/2012

12

C400, Scheduling Tx mode on selected BS1201/1203

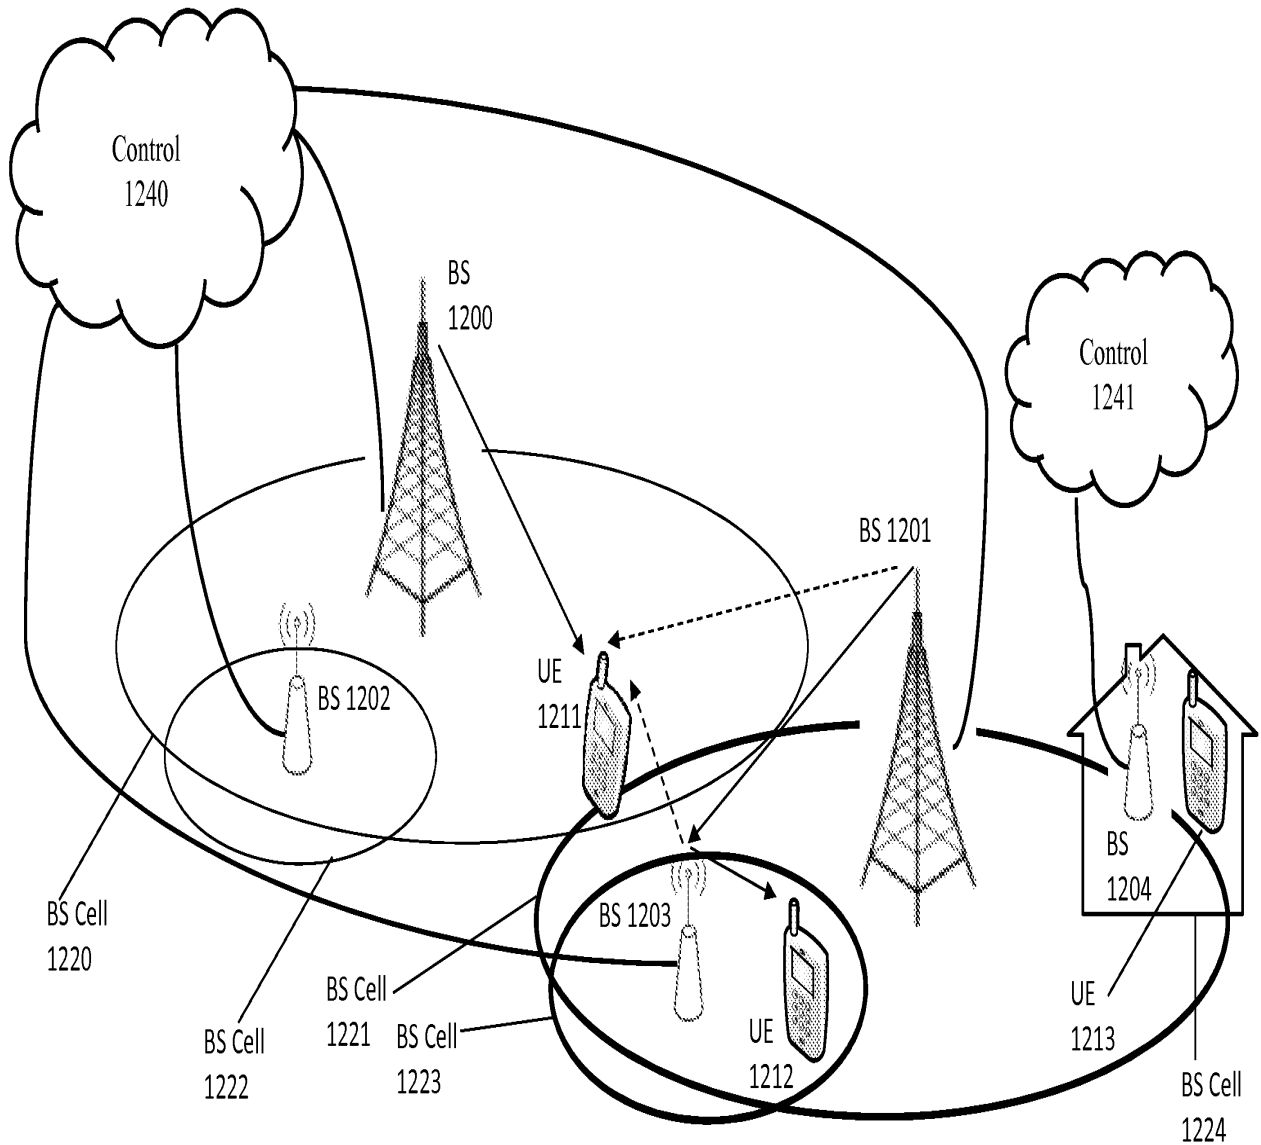


Figure 12

10/15/2012

13

C400b, Scheduling Tx mode on selected BS1201/1203 +Null BS1200

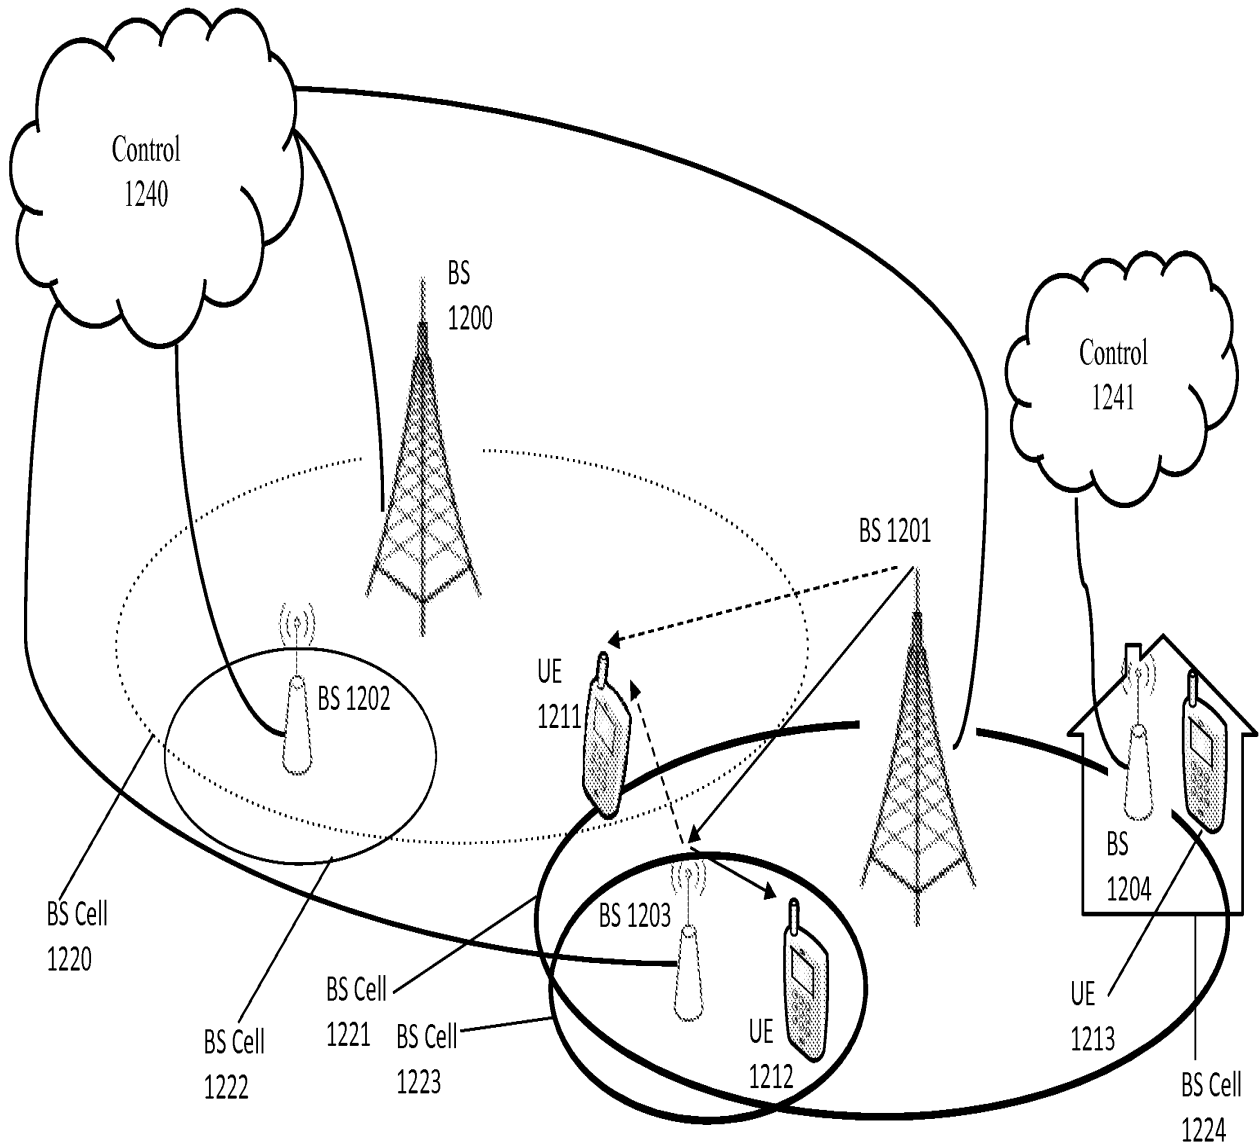


Figure 13

10/15/2012

C400, Scheduling Tx mode on selected BS1203 +Null Selected Neighbor BS1201

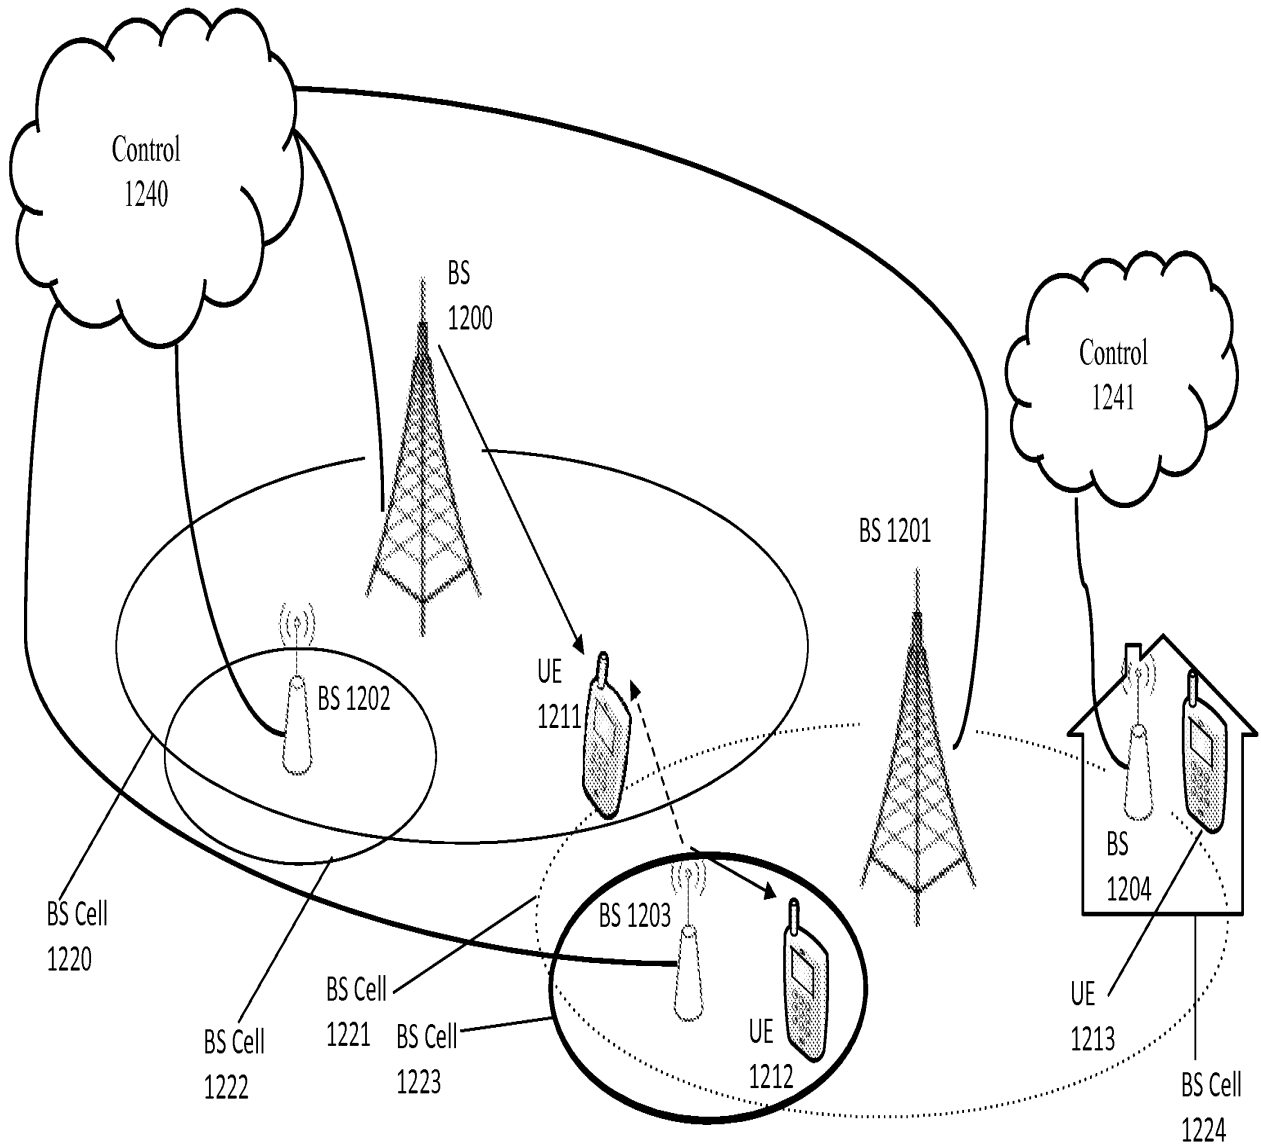


Figure 14

10/15/2012

15

C500, Scheduling Tx mode on selected UE1511 or UE1512, (May Tx NULL UE1510)

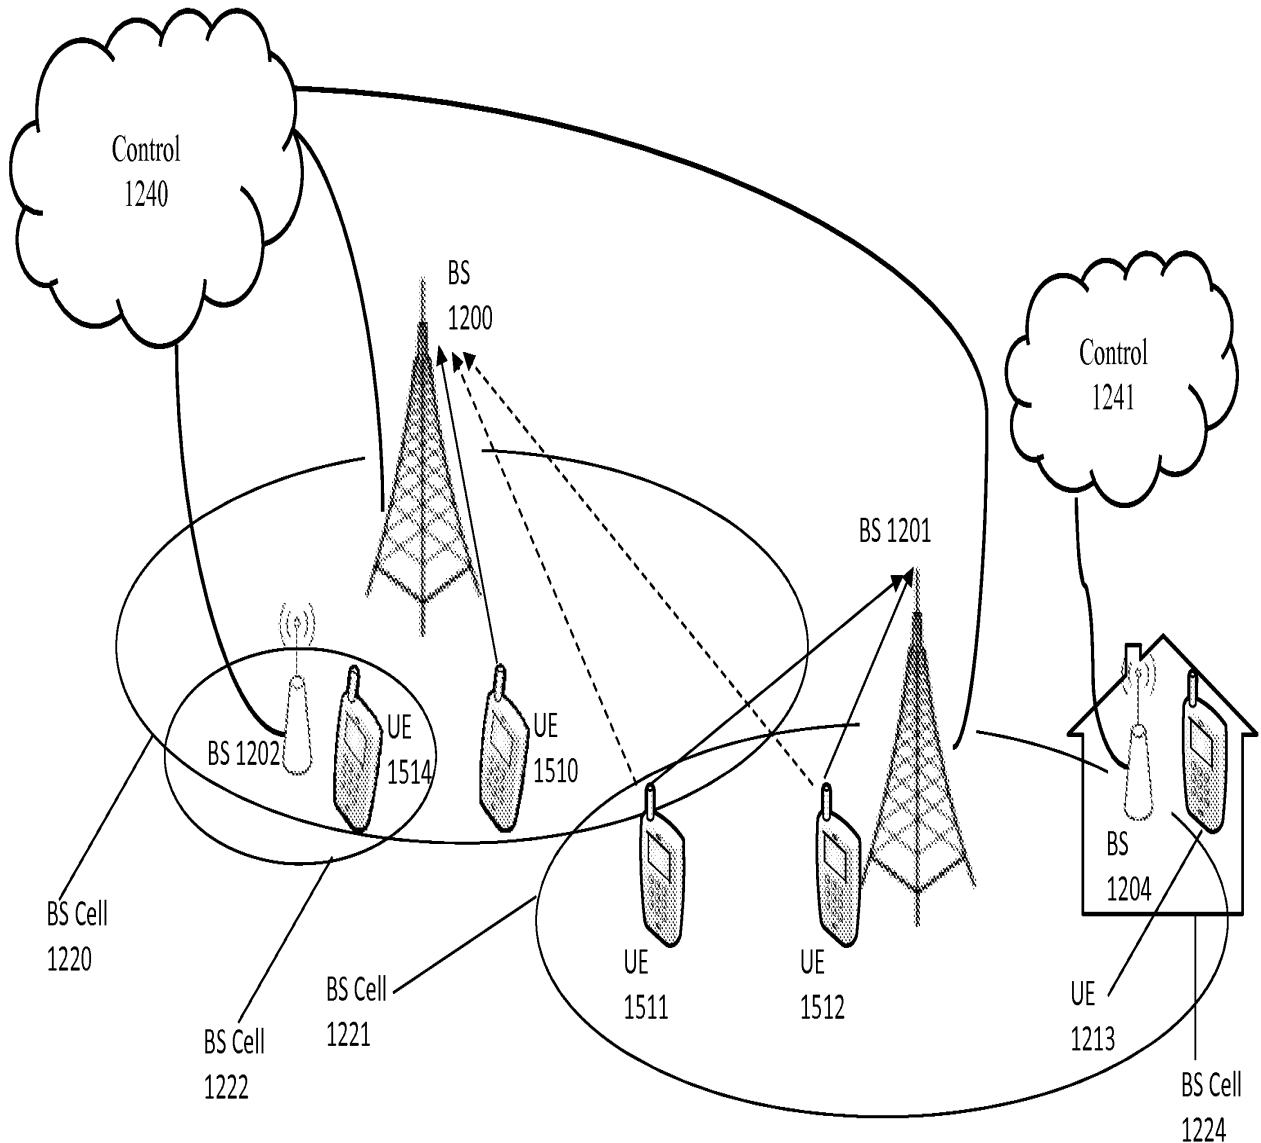


Figure 15

10/15/2012

Rx Interference varies with RB allocation

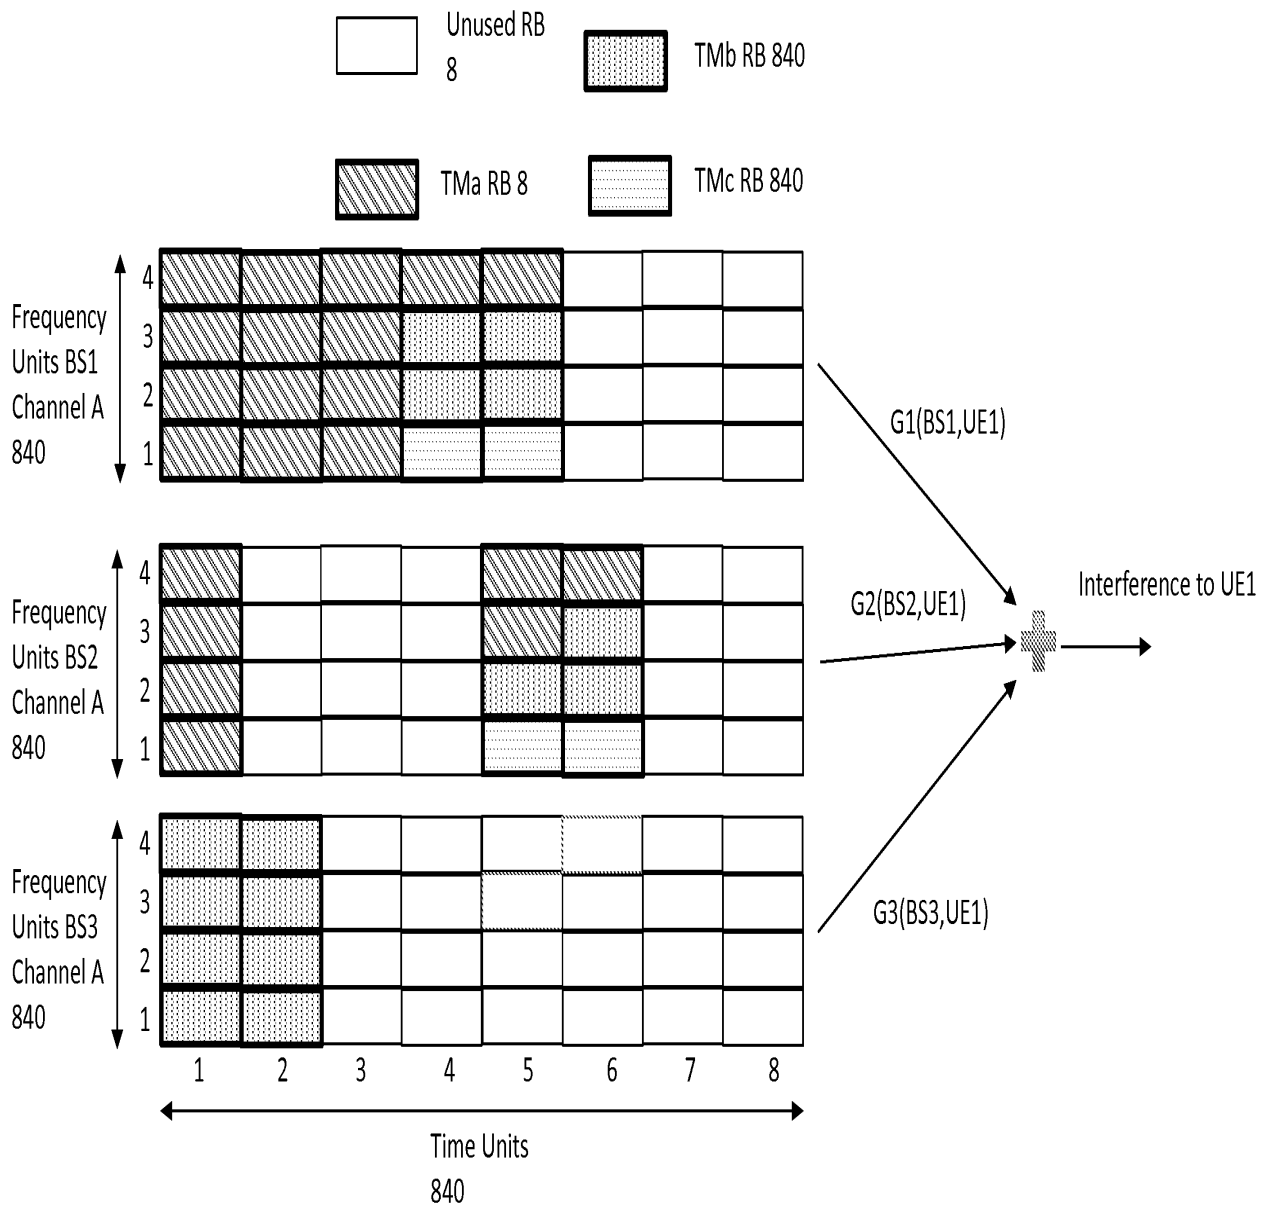


Figure 16

10/15/2012

17

Basic Scheduled Null/TM/Random

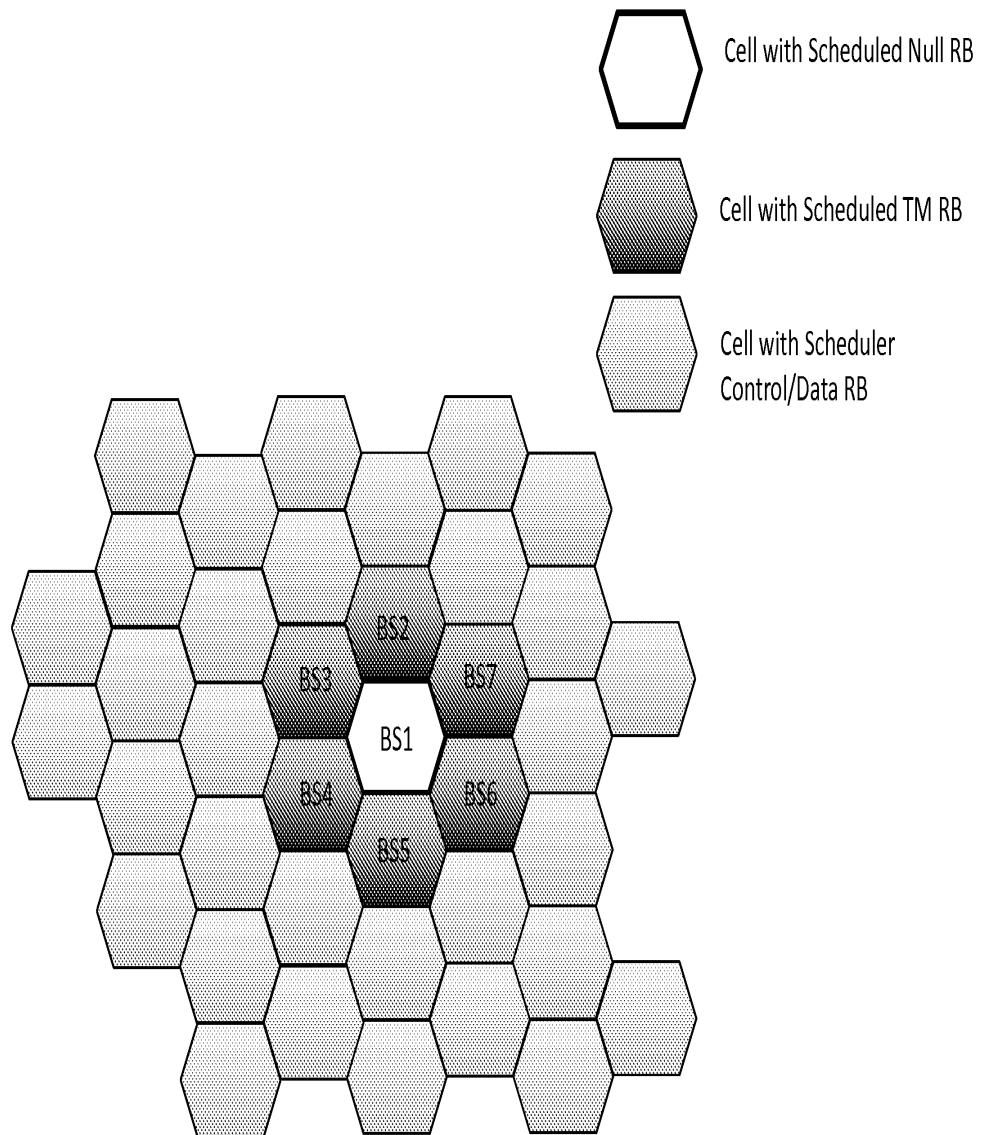


Figure 17

10/15/2012

18

Reuse Scheduled Null/TM/Random

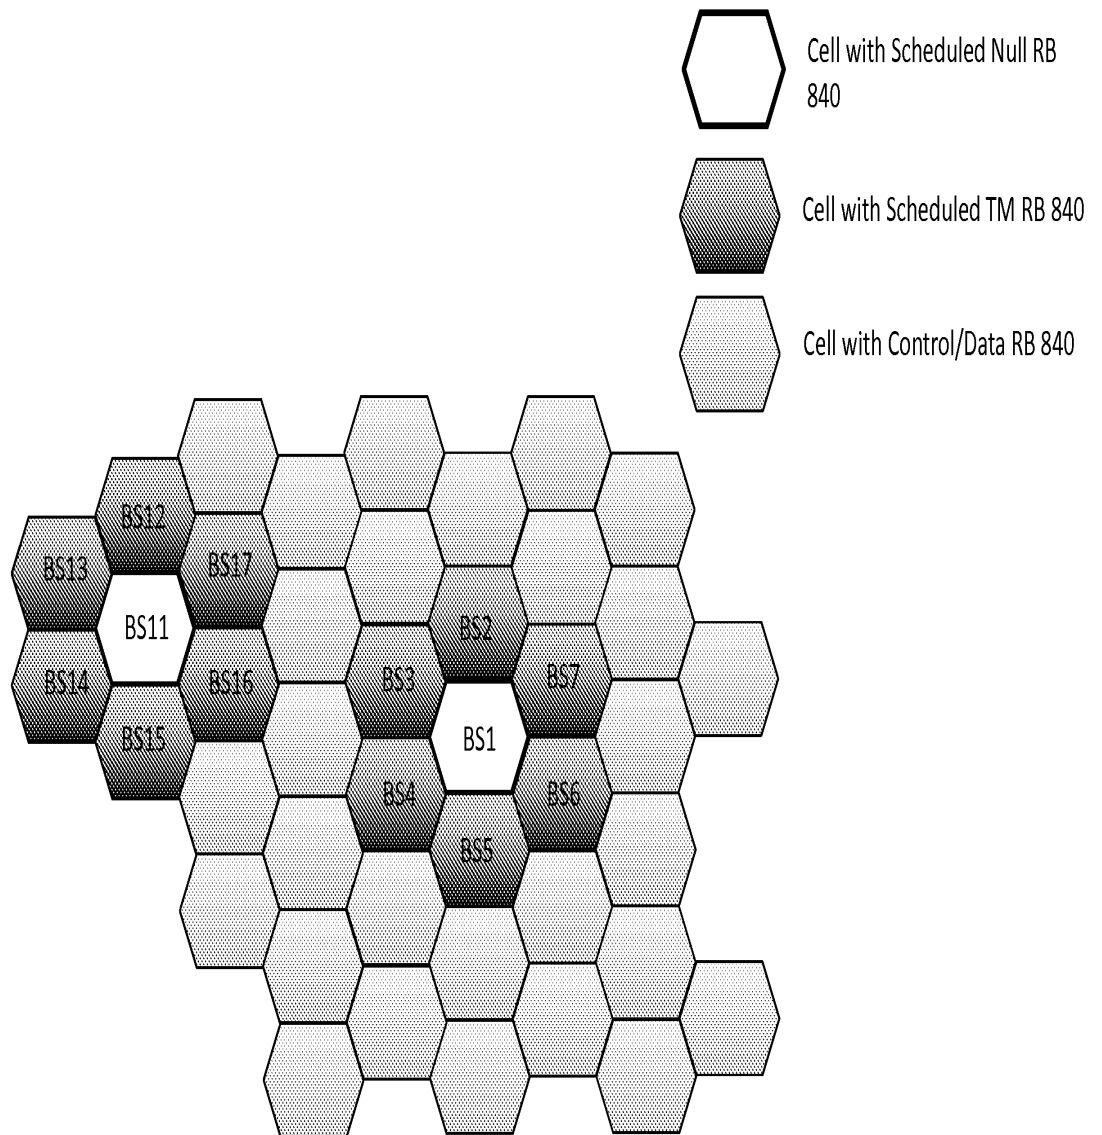


Figure 18

10/15/2012

19

Shifting/Translation of Scheduled Null/TM/Random

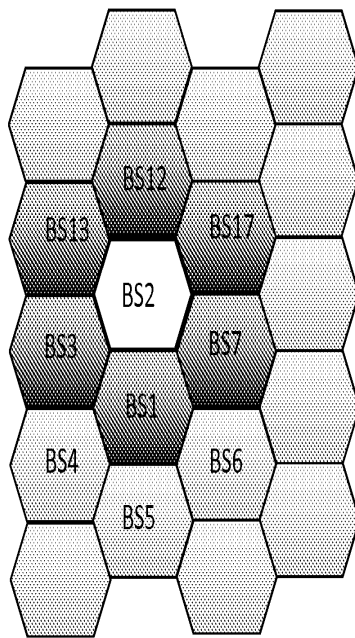
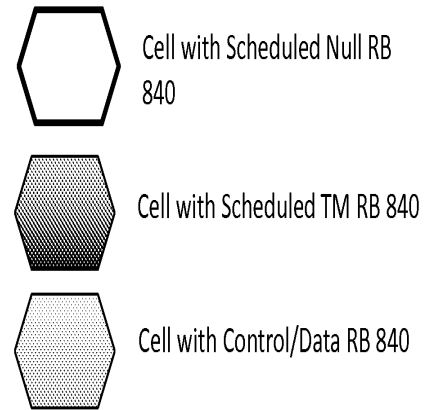


Figure 19a

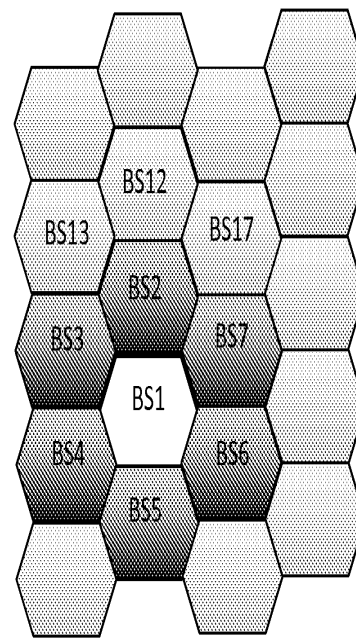


Figure 19b

10/15/2012

20

Hand-Off list Scheduled Null/TM/Random

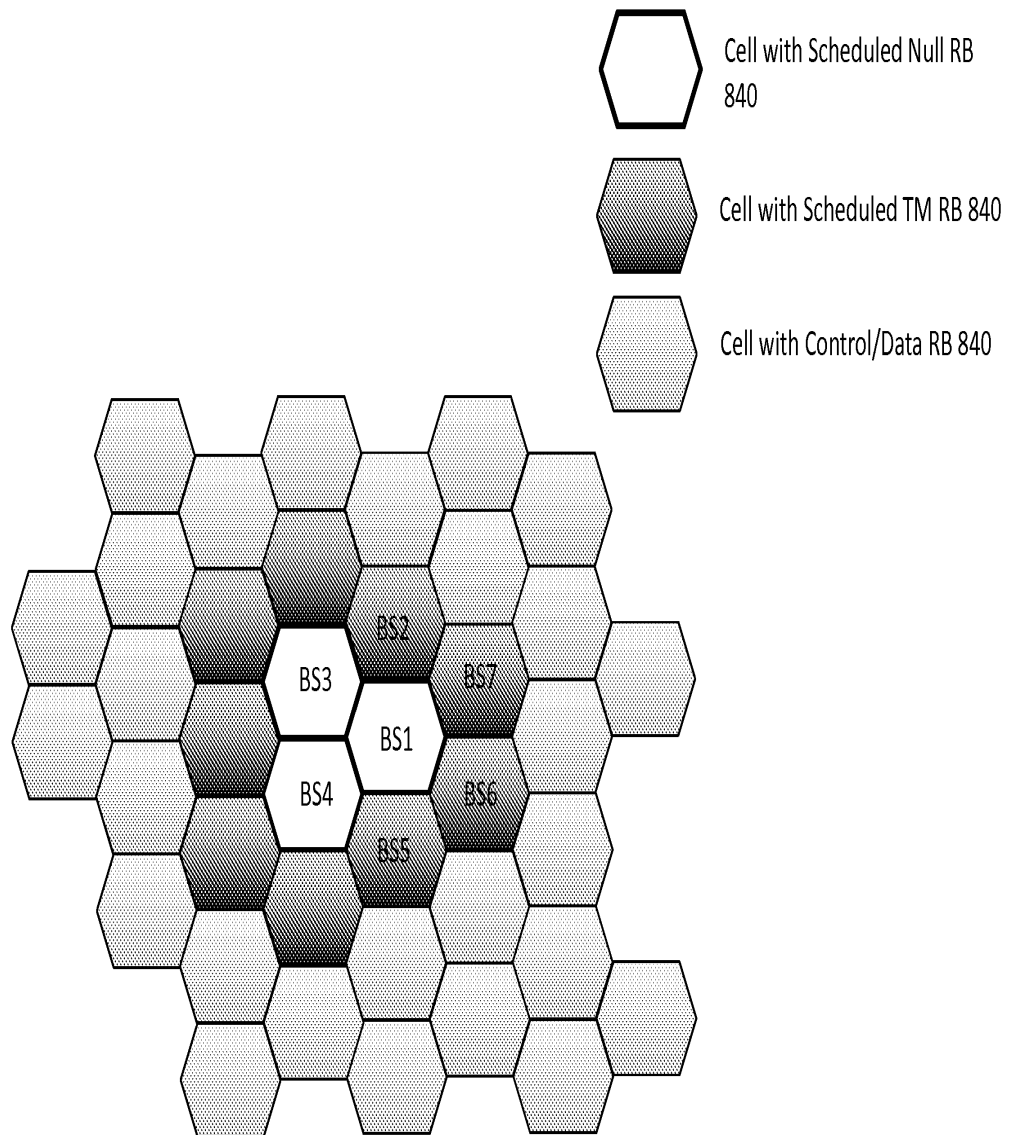


Figure 20

10/15/2012

21

Basic Scheduled Null/TM/Random

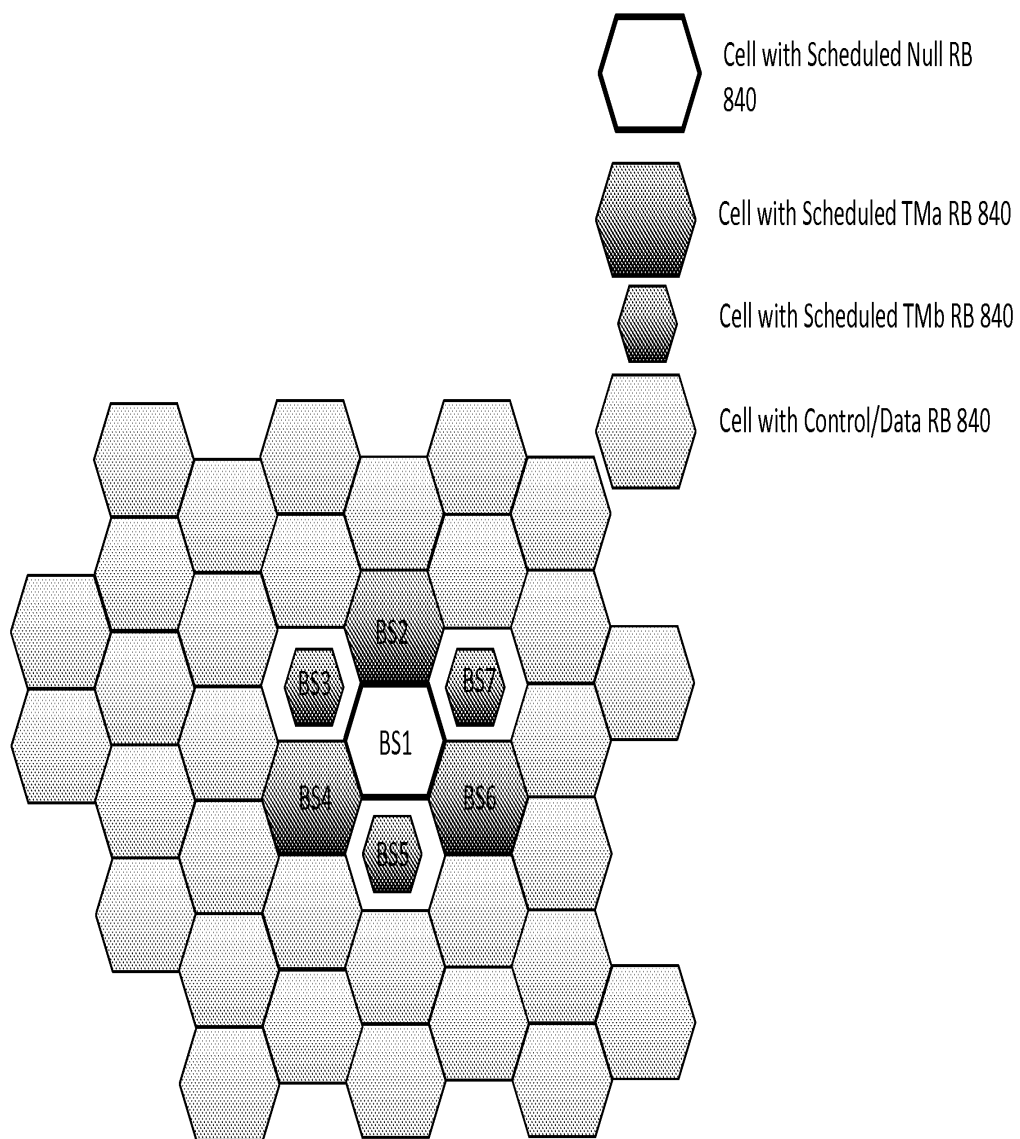


Figure 21

10/15/2012

22

Electronic Patent Application Fee Transmittal				
Application Number:				
Filing Date:				
Title of Invention:		USER EQUIPMENT LINK QUALITY ESTIMATION BASED ON POSITIONING		
First Named Inventor/Applicant Name:		Jose Tellado		
Filer:		Brian R. Short		
Attorney Docket Number:		WP11-1004-3		
Filed as Small Entity				
Provisional Filing Fees				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Provisional Application filing fee	2005	1	125	125
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Total in USD (\$)				125

Electronic Acknowledgement Receipt	
EFS ID:	13991011
Application Number:	61714151
International Application Number:	
Confirmation Number:	4523
Title of Invention:	USER EQUIPMENT LINK QUALITY ESTIMATION BASED ON POSITIONING
First Named Inventor/Applicant Name:	Jose Tellado
Customer Number:	86125
Filer:	Brian R. Short
Filer Authorized By:	
Attorney Docket Number:	WP11-1004-3
Receipt Date:	15-OCT-2012
Filing Date:	
Time Stamp:	20:43:46
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$ 125
RAM confirmation Number	7725
Deposit Account	
Authorized User	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
-----------------	----------------------	-----------	----------------------------------	------------------	------------------

1	Provisional Cover Sheet (SB16)	HWPII-1004-3-CoverSheet.pdf	2071180 3bb4c66e3b29ced588db454a57d996be671c1f5	no	3
Warnings:					
Information:					
2	Specification	HWPII-1004-3-SpecAsFiled.pdf	273734 aeab8a3878d4f14f4957b560c49e5ff11824b5c1	no	82
Warnings:					
Information:					
3	Drawings-only black and white line drawings	HWPII-1004-Figures.pdf	1024396 79fdd85f5c588e8962235345364026965ee6790a	no	22
Warnings:					
Information:					
4	Fee Worksheet (SB06)	fee-info.pdf	29703 5bb226a82d0bb1e5cb0948a193dff0bd31cc0247	no	2
Warnings:					
Information:					
Total Files Size (in bytes):			3399013		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					

SCORE Placeholder Sheet for IFW Content

Application Number: 61714151

Document Date: 10/15/2012

The presence of this form in the IFW record indicates that the following document type was received in electronic format on the date identified above. This content is stored in the SCORE database.

- Drawings – Other than Black and White Line Drawings

Since this was an electronic submission, there is no physical artifact folder, no artifact folder is recorded in PALM, and no paper documents or physical media exist. The TIFF images in the IFW record were created from the original documents that are stored in SCORE.

To access the documents in the SCORE database, refer to instructions developed by SIRA.

At the time of document entry (noted above):

- Examiners may access SCORE content via the eDAN interface.
- Other USPTO employees can bookmark the current SCORE URL (<http://es/ScoreAccessWeb/>).
- External customers may access SCORE content via the Public and Private PAIR interfaces.

Form Revision Date: February 8, 2006



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
61/714,151	10/15/2012		125	HWPII-1004-3		

CONFIRMATION NO. 4523

86125
Law Office of Brian Short
P.O. Box 641867
San Jose, CA 95164-1867

FILING RECEIPT



0000000057449840

Date Mailed: 11/07/2012

Receipt is acknowledged of this provisional patent application. It will not be examined for patentability and will become abandoned not later than twelve months after its filing date. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Inventor(s)

Jose Tellado, Mountain View, CA;
Gregory Raleigh, Woodside, CA;

Applicant(s)

Jose Tellado, Mountain View, CA;
Gregory Raleigh, Woodside, CA;

Power of Attorney:

Brian Short--41309

If Required, Foreign Filing License Granted: 11/05/2012

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 61/714,151**

Projected Publication Date: None, application is not eligible for pre-grant publication

Non-Publication Request: No

Early Publication Request: No

**** SMALL ENTITY ****

Title

USER EQUIPMENT LINK QUALITY ESTIMATION BASED ON POSITIONING

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international

page 1 of 3

application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national

security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation and commercialization of new technologies. The USA offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to encourage, facilitate, and accelerate business investment. To learn more about why the USA is the best country in the world to develop technology, manufacture products, and grow your business, visit SelectUSA.gov.