



US007130630B1

(12) **United States Patent**
Enzmann et al.

(10) **Patent No.:** **US 7,130,630 B1**
(45) **Date of Patent:** **Oct. 31, 2006**

(54) **LOCATION QUERY SERVICE FOR WIRELESS NETWORKS**

(75) Inventors: **Mark J. Enzmann**, Roswell, GA (US);
Robert T. Moton, Jr., Alpharetta, GA (US); **Samuel N. Zellner**, Dunwoody, GA (US)

(73) Assignee: **BellSouth Intellectual Property Corporation**, Wilmington, DE (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 760 days.

(21) Appl. No.: **09/739,315**

(22) Filed: **Dec. 19, 2000**

(51) **Int. Cl.**
H04Q 7/20 (2006.01)
H04M 11/04 (2006.01)

(52) **U.S. Cl.** **455/435.1; 455/404.2; 455/456.1; 340/988**

(58) **Field of Classification Search** **455/435.1, 455/404.1, 404.2, 456.1, 457, 521, 426.1; 340/988, 991, 992, 993**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,757,267 A	7/1988	Riskin	379/113
5,303,393 A	4/1994	Noreen et al.	455/3.2
5,511,111 A	4/1996	Serbetcioglu et al.	379/67
5,512,908 A	4/1996	Herrick	342/387
5,566,235 A	10/1996	Hetz	379/221.02
5,588,042 A	12/1996	Comer	379/59
5,596,625 A	1/1997	LeBlanc	379/60
5,610,973 A	3/1997	Comer	379/59
5,625,364 A	4/1997	Herrick et al.	342/449
5,657,375 A	8/1997	Connolly et al.	455/436
5,663,734 A	9/1997	Krasner	
5,701,301 A	12/1997	Weisser, Jr.	370/428
5,712,899 A *	1/1998	Pace, II	455/456.2
5,727,057 A	3/1998	Emery et al.	379/211

5,771,283 A	6/1998	Chang et al.	379/142
5,794,210 A	8/1998	Goldhaber et al.	705/14
5,819,155 A	10/1998	Worthy et al.	455/2
5,838,774 A	11/1998	Weisser, Jr.	379/92.02
5,852,775 A	12/1998	Hidary	455/412.1
5,875,401 A	2/1999	Rochkind	455/466

(Continued)

FOREIGN PATENT DOCUMENTS

EP 000964542 A2 12/1999 705/14 X

(Continued)

OTHER PUBLICATIONS

"Wireless Application Protocol", Oct. 1999 Wireless Internet Today, pp. 1-20.

(Continued)

Primary Examiner—Joseph Feild


Assistant Examiner—S. Smith

(74) *Attorney, Agent, or Firm*—Merchant & Gould

(57) **ABSTRACT**

A location query service for use with a wireless network that tracks the location of network devices, such as a network complying with enhanced 911 standards. The service provides requesters with the locations of network users, based on the locations of the users' wireless network devices. The service receives a location query from a requester, retrieves location information associated with the network user, and returns the location information to the requester. Alternately, before returning the location information to the requester, the service authenticates that the requestor is authorized by the network user to receive the network user's location information. A requestor can submit a location query, for example, by voice calls through the Public Switched Telephone Network (PSTN) to an interactive voice response unit (IVRU), personal computer access through a global computer network, and cellular telephone access through a global computer network.

22 Claims, 4 Drawing Sheets

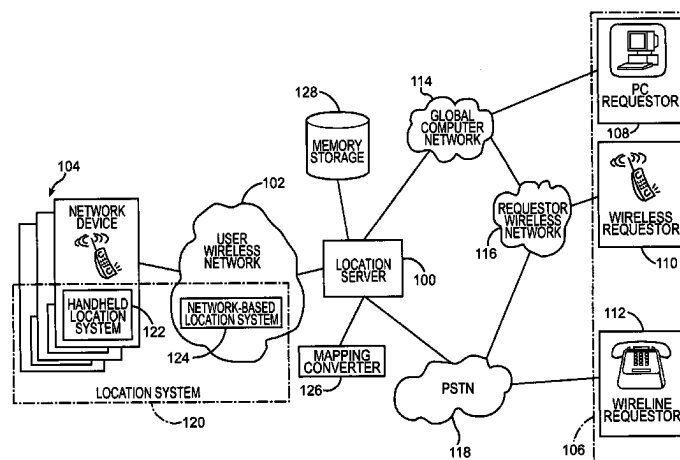

U.S. PATENT DOCUMENTS

5,903,636	A	5/1999	Malik	379/142.01
5,949,867	A	9/1999	Sonnenberg	379/221.02
5,961,593	A	10/1999	Gabber et al.	709/219
6,011,975	A	1/2000	Emery et al.	455/456.1
6,028,921	A	2/2000	Malik et al.	379/201
6,047,327	A	4/2000	Tso et al.	709/232
6,085,086	A	7/2000	La Porta et al.	455/432
6,091,956	A	7/2000	Hollenberg	455/456.5
6,101,381	A	8/2000	Tajima et al.	455/414
6,112,186	A	8/2000	Bergh et al.	705/10
6,122,520	A	9/2000	Want et al.	455/456.2
6,133,853	A	10/2000	Obradovich et al.	340/905
6,138,003	A *	10/2000	Kingdon et al.	455/410
6,157,829	A	12/2000	Grube et al.	455/414
6,184,829	B1	2/2001	Stilp	342/387
6,185,426	B1	2/2001	Alperovich et al.	455/456
6,208,854	B1	3/2001	Roberts et al.	455/417
6,208,866	B1	3/2001	Rouhollahzadeh et al.	455/456.5
6,233,329	B1	5/2001	Urban et al.	379/142.1
6,259,405	B1	7/2001	Stewart et al.	342/457
6,311,069	B1 *	10/2001	Havinis et al.	455/456.4
6,317,718	B1	11/2001	Fano	705/1
6,321,092	B1	11/2001	Fitch et al.	455/456.5
6,324,396	B1	11/2001	Vasa et al.	455/415
6,332,127	B1	12/2001	Bandera et al.	705/14
6,353,664	B1	3/2002	Cannon et al.	379/142.1
6,377,810	B1	4/2002	Geiger et al.	455/456.2
6,385,591	B1	5/2002	Mankoff	705/14
6,418,308	B1	7/2002	Heinonen et al.	455/414
6,421,441	B1	7/2002	Dzuban	379/221.09
6,427,073	B1	7/2002	Kortesalmi et al.	455/414.1
6,442,391	B1	8/2002	Johansson et al.	455/456
6,442,687	B1	8/2002	Savage	713/156
6,449,497	B1	9/2002	Kirbas et al.	455/564
6,463,533	B1	10/2002	Calamera et al.	713/163
6,470,378	B1	10/2002	Tracton et al.	709/203
6,473,626	B1	10/2002	Nevoux et al.	455/560
6,477,382	B1	11/2002	Mansfield et al.	455/458
6,484,148	B1	11/2002	Boyd	705/14
6,496,931	B1	12/2002	Rajchel et al.	713/168
6,505,046	B1	1/2003	Baker	455/456.3
6,505,048	B1	1/2003	Moles et al.	455/456.1
6,505,049	B1	1/2003	Dorenbosch	455/456
6,505,163	B1	1/2003	Zhang et al.	704/275
6,522,876	B1	2/2003	Weiland et al.	455/414.1
6,526,275	B1	2/2003	Calvert	455/418
6,545,596	B1	4/2003	Moon	340/425.5
6,546,257	B1	4/2003	Stewart	455/456.3
6,560,442	B1	5/2003	Yost et al.	455/67.1
6,560,461	B1	5/2003	Fomukong et al.	455/456
6,594,482	B1	7/2003	Findikli et al.	455/411
6,618,474	B1	9/2003	Reese	379/142.17
6,618,593	B1	9/2003	Drutman et al.	455/456
6,622,016	B1	9/2003	Sladek et al.	455/414.1
6,628,928	B1	9/2003	Crosby et al.	455/77
6,628,938	B1	9/2003	Rachabathuni et al.	455/414
6,647,257	B1	11/2003	Owensby	455/414.1
6,647,269	B1	11/2003	Hendrey et al.	455/456
6,662,014	B1 *	12/2003	Walsh	455/456.2
6,675,017	B1 *	1/2004	Zellner et al.	379/142.02
6,738,808	B1	5/2004	Zellner et al.	709/223
6,819,929	B1	11/2004	Antonucci et al.	455/445
6,850,758	B1	2/2005	Paul et al.	455/422.1
6,868,074	B1	3/2005	Hanson	370/328
2001/0034709	A1	10/2001	Stoifo et al.	705/51
2002/0077130	A1	6/2002	Owensby	455/466

FOREIGN PATENT DOCUMENTS

WO WO 98/19484 5/1998

WO

WO 99/27716

6/1999

OTHER PUBLICATIONS

Mark Moeglein, et al., "An Introduction to Snap Track Server-Aided GPS Technology", available at <http://www.snaptrack.com/atwork.html>.

U.S. Official Action dated Dec. 13, 2005 cited in U.S. Appl. No. 09/740,372.

U.S. Official Action dated Nov. 21, 2005 cited in U.S. Appl. No. 09/740,414.

U.S. Official Action dated Mar. 1, 2004 cited in U.S. Appl. No. 09/740,375.

U.S. Final Official Action dated Sep. 24, 2004 cited in U.S. Appl. No. 09/740,375.

U.S. Official Action dated Feb. 28, 2005 cited in U.S. Appl. No. 09/740,375.

U.S. Final Official Action dated Jul. 26, 2005 cited in U.S. Appl. No. 09/740,375.

Petronis, Scott, "Mapping Technology: The Common Thread," Wireless Review, vol. 17, No. 3, pp. 10-14, Feb. 1, 2000, ISSN: 1099-9248.

U.S. Official Action dated May 7, 2003 cited in U.S. Appl. No. 09/740,373.

U.S. Final Official Action dated Oct. 21, 2003 cited in U.S. Appl. No. 09/740,373.

U.S. Official Action dated Jan. 26, 2004 cited in U.S. Appl. No. 09/740,373.

U.S. Official Action dated Apr. 28, 2005 cited in U.S. Appl. No. 09/740,373.

U.S. Official Action dated Aug. 30, 2005 in U.S. Appl. No. 10/704,775.

U.S. Official Action dated Oct. 4, 2005 in U.S. Appl. No. 10/819,940.

Co-pending U.S. Appl. No. 11/252,039, filed Oct. 17, 2005.

U.S. Official Action dated Jul. 26, 2005 in U.S. Appl. No. 09/740,414.

U.S. Appl. No. 09/630,134, entitled "Method and System for Delivery of a Calling Party's Location," filed Aug. 1, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.

U.S. Appl. No. 09/740,414, entitled "Location Blocking Service from a Wireless Service Provider," filed Dec. 19, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.

U.S. Appl. No. 09/740,372, entitled "Identity Blocking Service from a Wireless Service Provider," filed Dec. 19, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.

U.S. Appl. No. 09/739,162, entitled "System and Method for Surveying Wireless Device Users by Location," filed Dec. 19, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.

U.S. Appl. No. 09/739,340, entitled "System and Method for Using Location Information to Execute an Action," filed Dec. 19, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.

U.S. Appl. No. 10/704,775, entitled "Location Blocking Service for Wireless Networks," filed Nov. 12, 2003, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.

U.S. Appl. No. 10/819,940, entitled "Anonymous Location Service for Wireless Networks," filed Apr. 8, 2004, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.

U.S. Official Action dated Feb. 12, 2003 in U.S. Appl. No. 09/630,134.

U.S. Official Action dated Jul. 10, 2003 in U.S. Appl. No. 09/630,134.

U.S. Official Action dated Jun. 7, 2004, in U.S. Appl. No. 09/630,134.

U.S. Official Action dated Jan. 13, 2005 in U.S. Appl. No. 09/630,134.


U.S. Official Action dated May 16, 2003 in U.S. Appl. No. 09/740,372.

U.S. Official Action dated Oct. 30, 2003 in U.S. Appl. No. 09/740,372.

U.S. Official Action dated Apr. 15, 2004 in U.S. Appl. No. 09/740,372.
U.S. Official Action dated Nov. 2, 2004 in U.S. Appl. No. 09/740,372.
U.S. Official Action dated Mar. 12, 2004 in U.S. Appl. No. 09/739,340.
U.S. Official Action dated Dec. 10, 2004 in U.S. Appl. No. 09/739,340.
U.S. Official Action dated Nov. 10, 2003 in U.S. Appl. No. 09/739,162.
U.S. Official Action dated Mar. 9, 2004 in U.S. Appl. No. 09/739,162.
U.S. Official Action dated Sep. 9, 2004 in U.S. Appl. No. 09/739,162.
U.S. Official Action dated Nov. 10, 2003 in U.S. Appl. No. 09/740,414.
U.S. Official Action dated Apr. 21, 2004 in U.S. Appl. No. 09/740,414.
U.S. Official Action dated Oct. 5, 2004 in U.S. Appl. No. 09/740,414.
PCT International Search Report, PCT/US01/22295.
Microsoft Mobility Developer Conference 2003.
3rd Generation Partnership Project: Technical Specification Group Services and System Aspects; Functional Stage 2 Description of Location Services in UMTS (1999).
http://www.openwave.com/us/news_room/press_releases/2001/20010320, "Open Wave Announces Availability to End-to-End Set of Location Services for Wireless Internet".

U.S. Appl. No. 09/739,339.
U.S. Appl. No. 09/739,162.
U.S. Appl. No. 09/606,535.
U.S. Appl. No. 09/606,534.
U.S. Appl. No. 09/739,340.
U.S. Appl. No. 09/630,134.
U.S. Official Action dated Feb. 24, 2006 cited in U.S. Appl. No. 09/630,134.
U.S. Official Action dated Mar. 10, 2006 cited in U.S. Appl. No. 11/252,039.
U.S. Appl. No. 11/298,419, entitled "System and Method for Using Location Information to Execute an Action" filed Dec. 9, 2005, Inventors: Robert T. Moton Jr.; Mark J. Enzmann; and Samuel N. Zellner.
U.S. Appl. No. 11/298,149, entitled "System and Method for Using Location Information to Execute an Action" filed Dec. 9, 2005, Inventors: Robert T. Moton Jr.; Mark J. Enzmann; and Samuel N. Zellner.
U.S. Appl. No. 11/300,694 entitled "System and Method for Using Location Information to Execute an Action" filed Dec. 15, 2005, Inventor: Samuel N. Zellner.
U.S. Official Action dated Apr. 21, 2006 cited in U.S. Appl. No. 11/322,531.
U.S. Official Action dated Jun. 7, 2005 in U.S. Appl. No. 09/630,134.

* cited by examiner

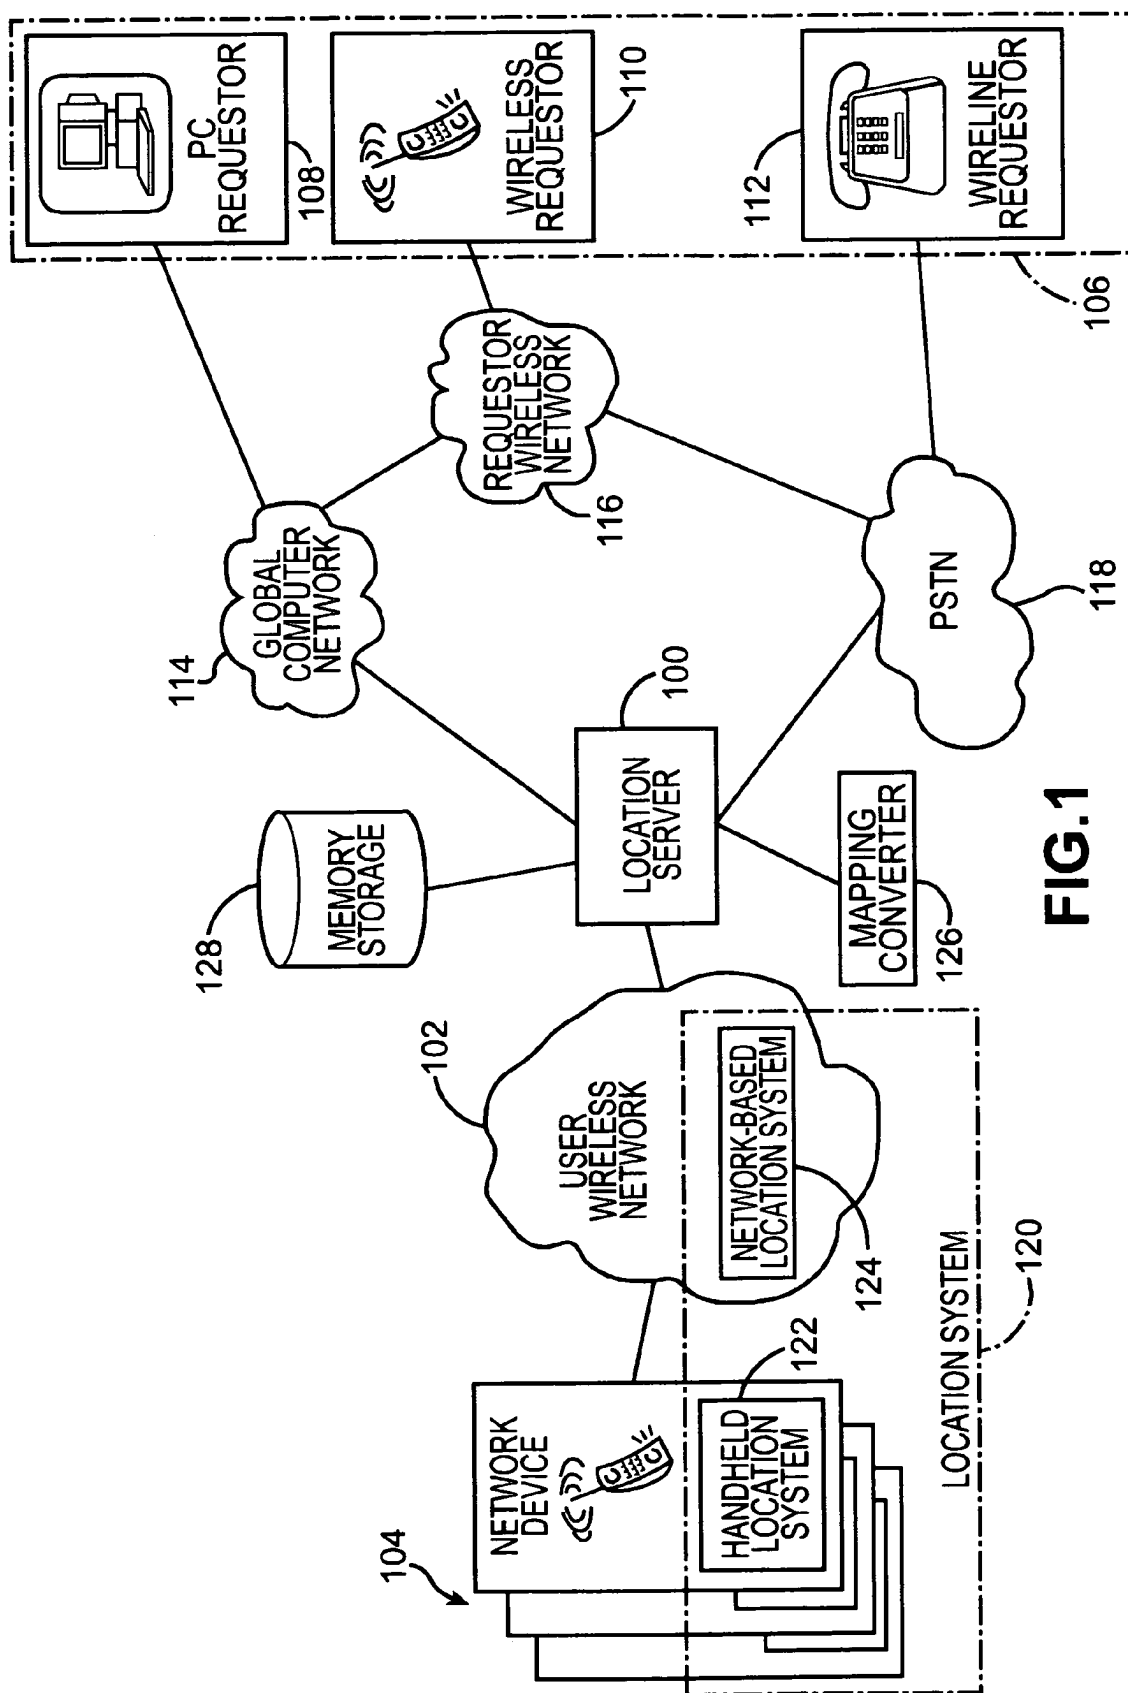



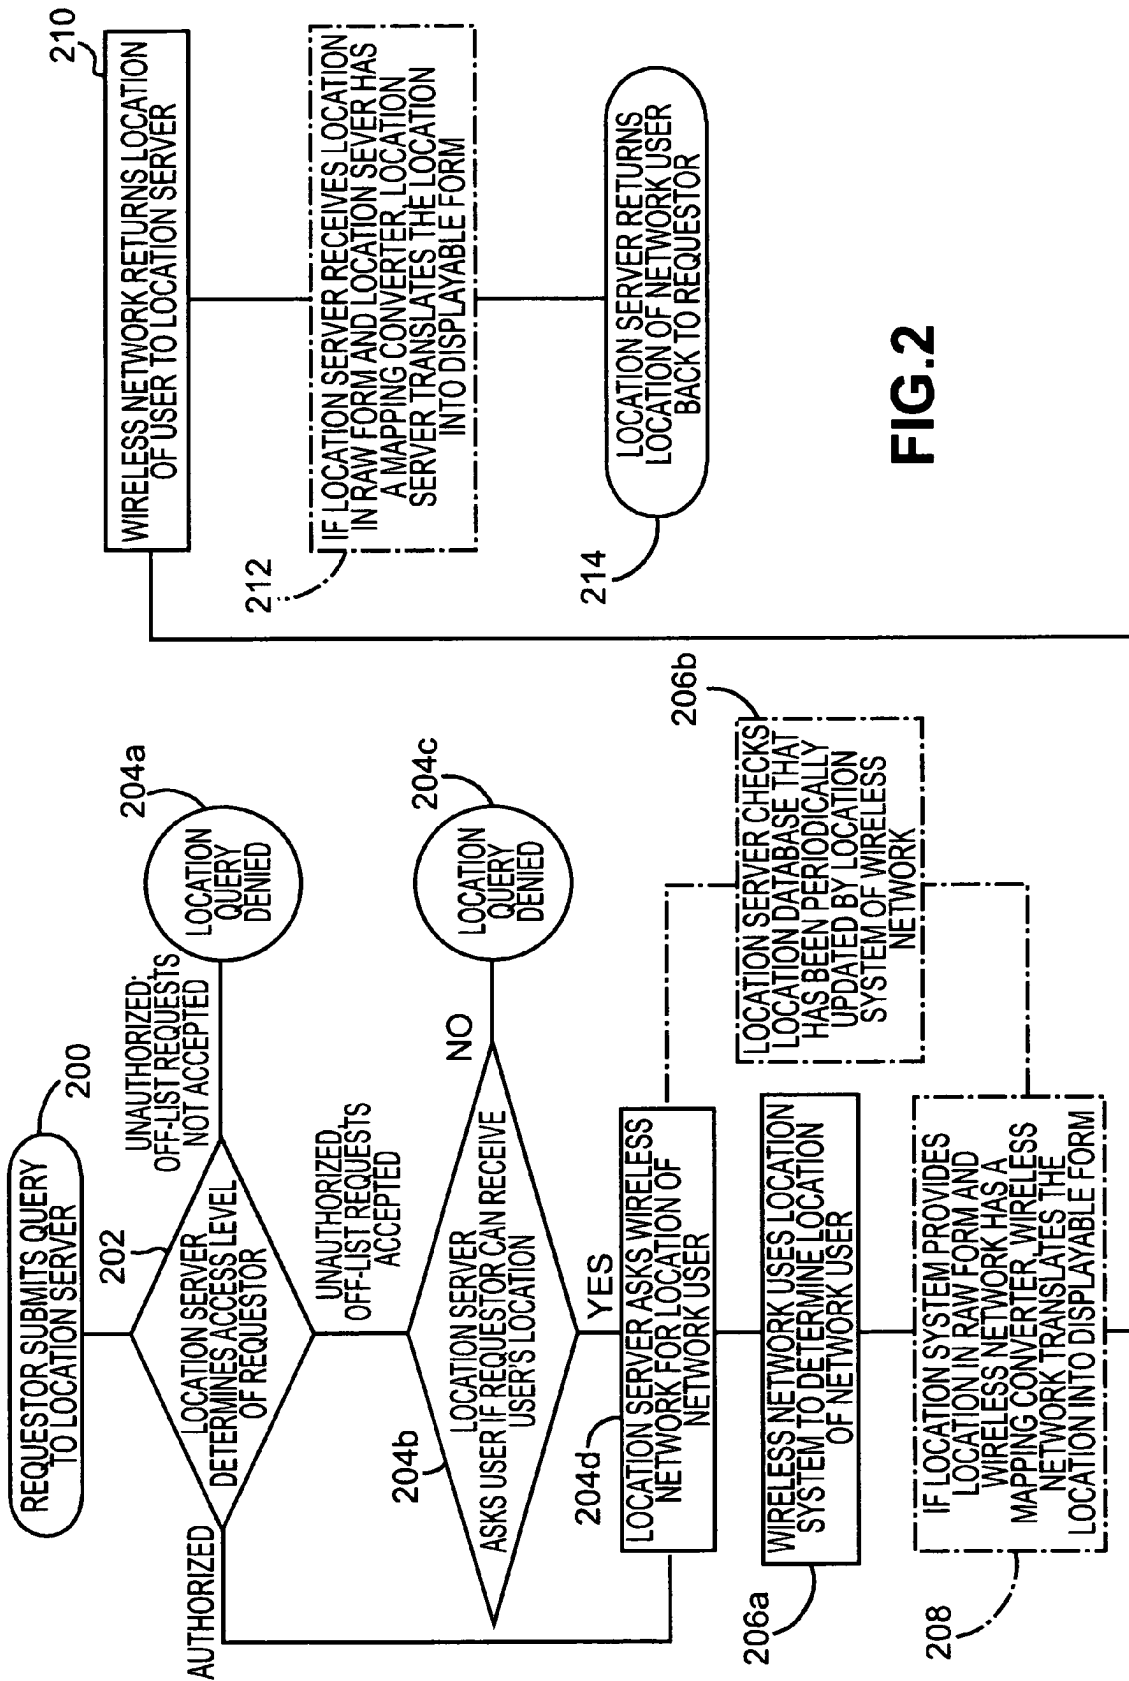


FIG. 2

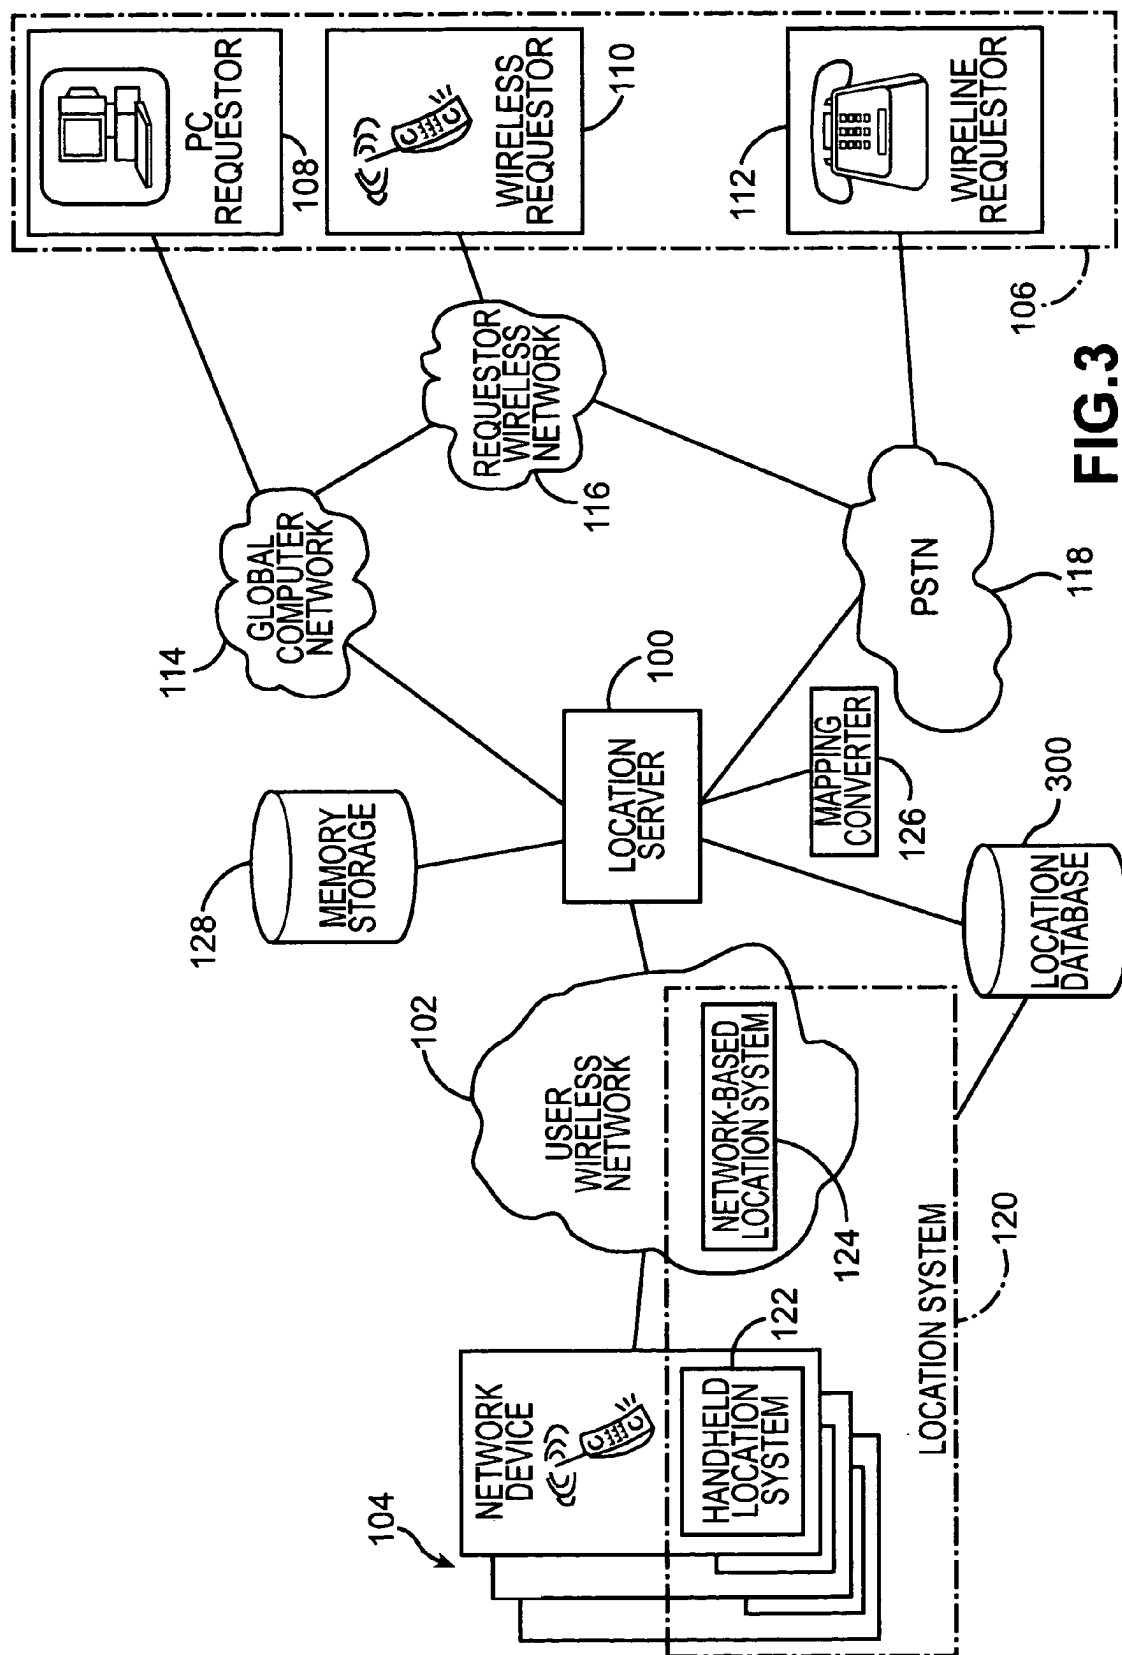

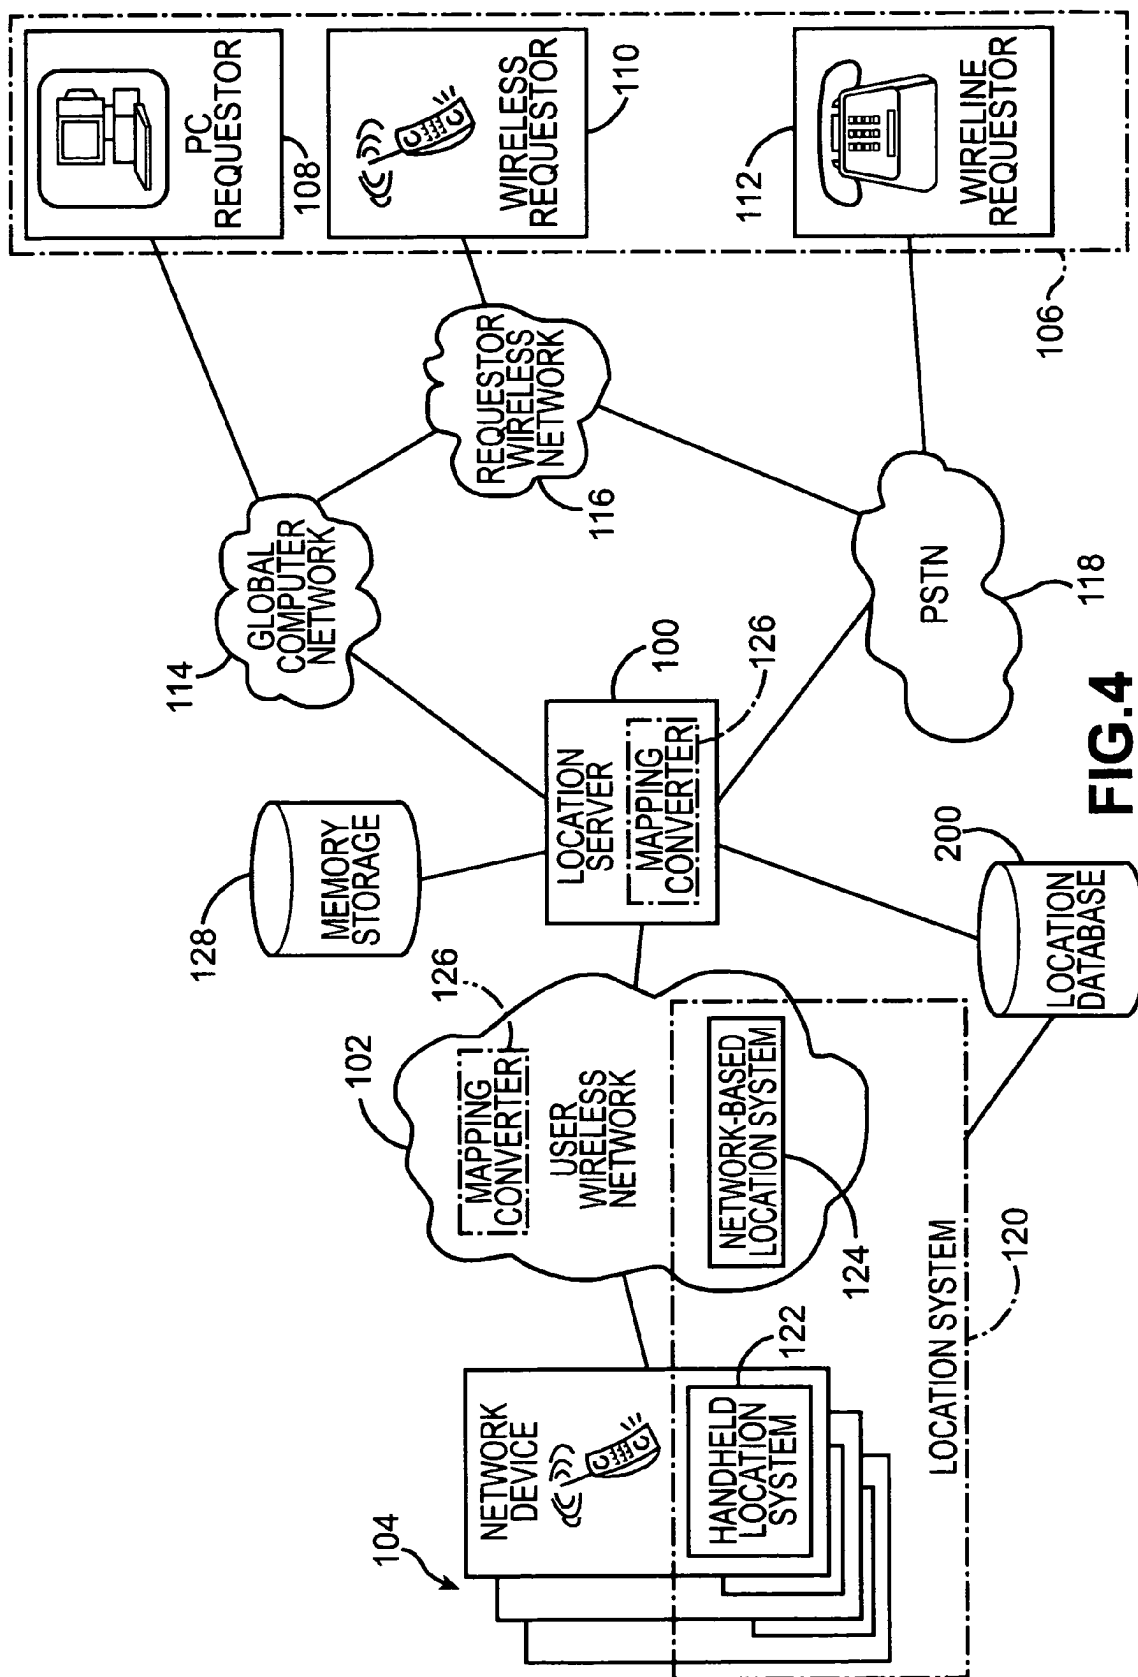

**LOCATION QUERY SERVICE FOR
WIRELESS NETWORKS****BACKGROUND****1. Field of the Invention**

The present invention relates to the field of wireless networks, and in particular, to wireless networks that track the location of wireless network devices.

2. Background of the Invention

In compliance with regulations promulgated by the Federal Communications Commission (FCC), wireless networks will soon provide services that are able to determine the location of all network users. These federally mandated services, known as enhanced wireless 911 (E911) services, will require wireless telephones to provide 911 call centers, or Public Safety Answering Points (PSAPs), with vital information necessary to locate and identify a caller in an emergency. To comply with E911 standards, wireless network providers will track the location and identity information of all wireless callers, with the purpose of providing such information to emergency personnel when a caller dials **911** from a wireless telephone. The FCC's wireless E911 rules require certain Commercial Mobile Radio Services (CMRS) carriers to begin transmission of enhanced location and identity information in two phases. Phase I requires carriers to transmit a caller's telephone number and general location to a PSAP. Phase II requires carriers to provide more precise location information to the PSAP.

Under the FCC rules, wireless networks and the corresponding wireless handheld devices, such as cellular telephones, will provide both the identity and location of the caller to a 911 dispatcher. To provide a caller's identity, the wireless handheld device will furnish a mobile identification number (MIN), indicating in most instances the telephone number of the device. The wireless network and wireless handheld devices will provide the location of callers using a network-based location system (e.g., triangulation), global positioning systems (GPSs) within the handheld devices, or a combination of the two systems.

Although, in large part, wireless network providers will implement the location tracking systems to comply with the FCC standards, once completed, the providers will have the ability to offer other location-based services supported by the E911 infrastructure. Indeed, beyond the needs of PSAPs in emergency situations, there are many instances in which it is helpful to know the location of a network user. For example, a service dispatcher monitoring the activities of his service technicians may wish to determine the exact locations of his technicians to facilitate efficient scheduling. Although, with conventional mobile telephone networks, the dispatcher could call and ask the technician for his location, the dispatcher may prefer to ascertain the location information without interrupting the technician's activities.

Other location tracking systems provide the ability to determine a person's location without communicating with (or interrupting) the person. However, these solutions require dedicated networks and network devices. For instance, although a global positioning system can provide a person's location without contacting the person, the system requires that the party requesting the location information (referred to herein as the "requester") have communication hardware that receives the location information from the person's GPS receiver. For example, in a typical fleet vehicle tracking system, the fleet manager must purchase and maintain a central processor that communicates with the GPS receiver in each vehicle.

SUMMARY OF THE INVENTION

The present invention is a location query service for use with a wireless network that tracks the location of network devices. The service provides requesters with the locations of network users, based on the locations of the users' wireless network devices. The service enables a requestor to obtain a network user's location without requiring communication with the user. In addition, the service relieves a requester of the burden of purchasing and maintaining dedicated location tracking equipment by taking advantage of existing communication infrastructures, such as global computer networks, Public Switched Telephone Networks (PSTNs), and wireless networks (with their soon-to-be-implemented location systems).

According to a preferred embodiment of the present invention, the location query service receives a location query from a requestor for a network user, retrieves the location information of the network user, and returns the location information to the requestor. Preferably, the requestor is an authorized requestor and the service authenticates that the requestor is authorized before returning the location information to the requestor. Within the query, the requestor provides an identification of the network user, such as a name, telephone number, Internet address, or electronic mail (email) address. The service of the present invention supports a variety of communication methods through which a requestor can submit a location query, for example, voice calls through the Public Switched Telephone Network (PSTN) to an interactive voice response unit (IVRU), personal computer access through a global computer network, and cellular telephone access through a global computer network.

In processing location queries, a preferred embodiment of the present invention gives the network user control of who can receive his location information. The network user provides the service with a list of authorized requestors who may receive the user's location information. The service authenticates that a requestor is authorized before forwarding location information.

In an alternate preferred embodiment of the present invention, the location query service prompts a network user each time an unauthorized requestor asks for location information. An unauthorized requestor is a requestor who is not designated on a network user's list of authorized requestors and who has not been pre-approved to receive the user's location information. With these "off-list" requests, the network user permits or denies access for unauthorized (off-list) requestors on an individual basis, while automatically permitting access by authorized (on-list) requestors.

In a preferred embodiment, the system of the present invention includes a user wireless network and a location server. The user wireless network is in communication with a plurality of network devices operated by a plurality of network users. The user wireless network is also in communication with a location system for determining the location of each network device. The location server is in communication with the wireless network and with a plurality of requestors. The location server accommodates a variety of interfaces in communicating with the plurality of requestors. For example, for Internet protocol (IP) communication, the location server communicates with the plurality of requestors through a global computer network, e.g., the Internet. As another example, for voice communication, the location server communicates with the plurality of requestors through a PSTN.

According to a preferred method of the present invention, the location server receives a location query for a network user from a requestor, retrieves the user's location from the location system, and forwards the location back to the requestor. Preferably, the location server also confirms that the requestor is authorized to receive the user's location. In an alternate preferred embodiment, if the location system provides the location in a "raw" form, not easily understood by the typical requestor (e.g., x-y position coordinates), the method further includes translating the location from the raw form to a "displayable" form (e.g., a street address, building name, or area name). The system component that executes this translation function is a mapping converter. The mapping converter can be provisioned in several locations within the system, from the requestor's device to the devices of the plurality of requestors.

Accordingly, it is an object of the present invention to provide a requester with the location of a wireless network user.

Another object of the present invention is to provide a wireless network user with the ability to automatically furnish specified requesters with the location of the network user.

Another object of the present invention is to provide a wireless network user with the ability to approve or deny access to the user's location information by a requestor who has not been pre-approved.

These and other objects of the present invention are described in greater detail in the detailed description of the invention, the appended drawings, and the attached claims.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a system architecture that provides the location query service according to a preferred embodiment of the present invention.

FIG. 2 is a flow chart tracing the steps for providing a location query service according to a preferred embodiment of the present invention.

FIG. 3 is a schematic diagram of a system architecture that provides the location query service according to an alternate preferred embodiment, in which a device's location is periodically recorded in a location database 300.

FIG. 4 is a schematic diagram of a system architecture that provides the location query service according to an alternate preferred embodiment of the present invention, with the mapping converter provisioned in alternate locations.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is a location query service for use with a wireless network that tracks the locations of network users. The location query service provides a requestor with the location of a network user. In providing this service, the present invention contemplates future enhanced digital cellular networks, in which network users will use digital cellular handheld devices to access data from a global computer network, and in which digital cellular network providers will track the location of each network user.

Referring to FIG. 1, the primary components of a preferred embodiment of the present invention include a location server 100 and a user wireless network 102. User wireless network 102 is in communication with a plurality of network devices 104. Location server 100 is in communication with user wireless network 102 and with a plurality of

requestors 106. The plurality of requestors 106 employ any suitable means to communicate with location server 100, but preferably use at least one of a PC requestor 108, a wireless requestor 110, and a wireline requestor 112. For communication between location server 100 and PC requestor 108, the present invention includes a global computer network 114. For communication between location server 100 and wireless requestor 110 (which has IP messaging capabilities), the present invention includes a requestor wireless network 116 and global computer network 114 for IP messaging, and requestor wireless network 116 and a PSTN 118 for voice communication. For communication between location server 100 and wireline requestor 112, the present invention includes PSTN 118.

According to a preferred embodiment of the present invention, user wireless network 102 is in communication with a location system 120 that provides the locations of the plurality of network devices 104. Location system 120 includes one or both of handheld location systems 122 and a network-based location system 124. Handheld location systems 122 are provisioned in wireless handheld devices 104. Network-based location systems 124 are part of user wireless network 102.

Location system 120 provides the location information, e.g., position coordinates, of a handheld device, which indicates where a network user is located. Location system 120 can be a part of the wireless network or can be contained in the handheld devices. In the preferred embodiment of the present invention, as shown in FIG. 1, location system 120 is both a part of the wireless network and is also contained in the handheld devices. For example, suitable methods of determining location as a part of the wireless network include Wireless Access Protocol (WAP) location services, Time Difference of Arrival (TDOA) location systems, Angle of Arrival (AOA) location systems, and other systems using triangulation across cell sites or cell sectors. An example of a suitable location system in the handheld devices is a GPS.

If location system 120 provides location information in raw form, a further preferred embodiment of the present invention includes a mapping converter 126. An example of information in raw form would be GPS coordinates, with which the typical telephone user is unfamiliar. As used herein, "raw" refers to location information in a rudimentary form, such that a typical telephone user would find it difficult to understand. "Displayable" refers to location information easily understood by a typical network user. Although displayable may imply a visual communication, as used herein, the term extends to other forms of communication, such as audio-based communication. Mapping converter 126 includes a cross-referenced database that allows mapping converter 126 to translate raw location information into displayable location information. For example, the database of mapping converter 126 could include an entry associating coordinates "R-S" (raw information) with the description "101 Park Place" (displayable information).

Although shown as a separate component of the system in FIG. 1, mapping converter 126 could be integral to a component described above. One of ordinary skill in the art would understand that the functions and structure of mapping converter 126 could be located in several different places, anywhere from location system 120 to the communication devices of the requestors 106. For example, mapping converter 126 could be located within network-based location system 124. As another example, mapping converter 126 could also be located within location server 100. Regardless of where mapping converter 126 is provisioned,

the desired end result is to deliver displayable location information to the plurality of requestors **106**.

Location server **100** executes the service logic of the present invention, including receiving location queries from requestors **106**, confirming the access levels of requestors **106**, obtaining the location information of wireless network devices **104**, and returning the location information to requestors **106**. Although shown as a separate component in FIG. 1, one of ordinary skill in the art would appreciate that location server **100** could be a part of another system component, such as user wireless network **102**, PSTN **118**, or global computer network **114**.

In a representative embodiment, location server **100** consists of two components. The first component is a locating mechanism (such as location system **120**) that determines locations of network devices **104** using various technologies (e.g., GPS, triangulation, radio signal delay, and cell sector) and combinations thereof. The location mechanism can reside in a network device (e.g., GPS) or within user wireless network **102**. The location mechanism produces x-y coordinates that are typically transmitted to the second component of location server **100**, which could be in the same box or could be connected via an IP network. The second component of location server **100** integrates the coordinate information into various mapping systems and provides an interface to other applications through various protocols, of which IP is the most common.

In a preferred embodiment of the present invention, location server **100** is in communication with a memory storage **128**. Memory storage **128** is a database or other memory storage device that can record relationships between device identifications (e.g., MINS) and network user identifications. In addition, memory storage contains authorized requestor lists for each device identification. Although FIG. 1 shows memory storage **128** as a separate component of the system accessible to location server **100**, memory storage **128** could be contained within location server **100**.

Wireless handheld devices **104** operate over user wireless network **102**. Familiar examples include pagers and cellular telephones. As a minimum, wireless handheld devices **104** provide network users with wireless communication and cooperate with user wireless network **102** to provide the location of the device. This cooperation may simply involve wireless transmissions to user wireless network **102** that enable network-based location system **124** to ascertain the locations of devices **104**. Or, in conjunction with network-based location system **124**, wireless handheld devices **104** may include handheld location systems **122**, such as GPSs integral to the devices. To facilitate the alternate preferred embodiment in which a network user responds to off-list requests, wireless handheld devices **104** include messaging capabilities that can communicate a request for access, the identification of the unauthorized requestor, and a response by the network user. For example, such messaging capabilities can be audio-based, text-based, or graphical. Preferably, wireless handheld devices **104** are WAP-compatible thin clients having thin browsers adapted to access global computer network **114** and to communicate with location server **100**.

Global computer network **114** provides communication between TCP/IP requestor devices and location server **100**. Preferably, global computer network **114** is the Internet. Also, preferably, network **114** provides a user-friendly interface, e.g., a graphical user interface, through which a requestor can submit a location query. With a graphical user interface (GUI), the requestor device, such as PC requestor

108, is provisioned with software that cooperates with the GUI. Global computer network **114** also preferably supports communication with WAP-compatible wireless devices, such as wireless requestor **110**. With these WAP-compatible wireless devices, requestor wireless network **116** provides communication between wireless requestor **110** and global computer network **114**.

PSTN **118** provides communication between PSTN devices and location server **100**. Along with requestor wireless network **116**, PSTN **118** also provides communication between wireless requestors and location server **100**. Location server **100** preferably supports a number of different protocols, at least one of which is IP. PSTN **118** preferably includes a Voice XML (Extensible Markup Language) server, which allows PSTN **118** to interface with location server **100** and provides a common markup language for supporting voice browsing applications. The Voice XML server could include, for example, an IVRU allowing a requestor to use a touch-tone pad to navigate the application.

The plurality of requestors **106** communicate with location server **100** using a device compatible with location server **100** or compatible with an interface between the requestors **106** and location server **100**. Global computer network **114** and PSTN **118** are examples of these types of interfaces. Compatible devices include personal computers and IP wireless devices for global computer network **114**, and standard wireline telephones for PSTN **118**.

Together, the above components provide the location query service as outlined in the flowchart of FIG. 2, according to a preferred embodiment of the present invention. While the system operation described herein and illustrated in the diagram and flowchart contains many specific details, these specific details should not be construed as limitations on the scope of the invention, but rather as examples of preferred embodiments thereof. As would be apparent to one of ordinary skill in the art, many other variations on the system operation are possible, including differently grouped and ordered method steps. Accordingly, the scope of the invention should be determined not by the embodiments illustrated, but by the appended claims and their equivalents.

As shown in step **200**, a requestor submits a location query to location server **100**. The query includes at least an identification of the requestor and an identification of the network user about whom the requestor desires location information. Optionally, the query also includes a password, which enables a location query service provider to allow access to the service only by requestors who pay for the service. Alternately, only the network user pays for the service and gives her authorized requestors a password to gain access to the service.

The requestor submits the query using any number of communications media supported by location server **100** and the requestor's individual communication device. For example, if the requestor uses a personal computer **108** linked to location server **100** through global computer network **114**, the requestor could initiate the query using a graphical user interface. As another example, if the requestor uses a text messaging wireless device **110** linked to location server **100** through requestor wireless network **116** and global computer network **114**, the requestor could initiate the query using a menu driven interface or a series of key sequence inputs. As another example, if the requestor uses a wireline telephone, the requestor could interact with an IVRU using the requestor's touch-tone keys to initiate the query.

In the preferred embodiment, the present invention accommodates the variety of ways in which a requestor can

identify the network user that the requestor wishes to locate. For example, the requestor can give a telephone number, name, Internet address, or email address of the network user. In response, location server **100**, global computer network **114**, PSTN **118**, or a separate system component consults a database cross referencing this information and translates the given identification into an identification of the network user's wireless device (e.g., the MIN). As described later in this process, location server **100** provides location system **120** with this device identification to search for the location of the device.

Once location server **100** has received the query, in step **202**, location server **100** determines whether the requestor is an authorized requestor and whether the network user in question accepts requests from unauthorized off-list requestors to view the network user's location information. Location server **100** determines if the requestor is an authorized requester by consulting memory storage **128**, which contains a list that the network user provides. The list indicates which people (requesters) have access to the network user's location information. Although shown as a separate system component in FIG. 1, memory storage **128** could be a part of location server **100**, such that the list is stored in location server **100**.

Along with the access list, the network user specifies a user preference dictating whether the network user will entertain requests to release her location information to requestors not on the access list. The user preference is also preferably stored in memory storage **128**, but can be stored in any location accessible to location server **100**. Location server **100** consults this user preference if the requestor is not on the access list.

If the requestor is unauthorized and the network user does not accept individual requests to release location information, in step **204a**, location server **100** returns a message to the requestor reporting that the location query has been denied.

If the requestor is unauthorized, but the network user does entertain requests to release location information, in step **204b**, location server **100** asks the network user if the requestor can receive the network user's location information.

In asking for approval, location server **100** provides the network user with the identity of the requestor. If the network user chooses not to release her location information to the requestor, in step **204c**, location server **100** returns a message to the requestor reporting that the location query has been denied.

If, in step **204b**, the network user chooses to release her location information to the requestor, in step **204d**, location server **100** proceeds with determining the location information of the wireless device. Likewise, if originally in step **202**, location server determines that the requestor is on the access list and is authorized, location server **100** proceeds with determining the location information of the wireless device in step **204d**.

In step **204d**, location server **100** asks user wireless network **102** for the location information of the network user. In this inquiry, location server **100** includes the identification of the device corresponding to the network user.

In step **206a**, user wireless network **102** uses location system **120** to determine the location of the specified network device. User wireless network **102** monitors wireless handheld devices that are powered on. In most instances, a network user simply turns on his wireless handheld device

and, if it is a text messaging device, leaves the network interface open, perhaps to a web page. The initial accessing of the web page or the completion of any other wireless transmission (e.g., placing of a wireless telephone call) provides user wireless network **102** with location and identity information. In addition, each time the web page automatically refreshes, or each time the network user enters a browse command, user wireless network **102** receives updated location information. Thus, after location server **100** asks user wireless network **102** for the location of the network user, location system **120** of user wireless network **102** waits for the next transmission by the network device and determines the location information from that transmission. Alternately, instead of having location server **100** query user wireless network **102** for location information regarding a specific mobile device, location system **120** could be configured to continuously track devices and push location information to location server **100**.

As another way to avoid a prolonged wait for the transmission providing the location information, in an alternate preferred embodiment, as shown in FIG. 3, the present invention periodically records a device's location in a location database **300**. Therefore, instead of activating location system **120** only in response to a request from location server **100**, location system **120** of user wireless network **102** periodically updates location database **300** and always has location information available when location server **100** makes a request. In such a case, as shown in step **206b**, location server **100** checks location database **300** for the location information of the network user. Although maintaining a database that is periodically updated for all network devices requires considerable amounts of data storage, this alternate embodiment provides a more immediate response to the requestor.

In steps **206a** or **206b**, location system **120** of user wireless network **102** provides the location information in either raw or displayable forms. If location system **120** provides raw location information, such as x-y coordinates, the method of the present invention preferably further includes translating the raw data to a displayable message, easily comprehended by a typical requestor. Mapping converter **126** executes this translation and the method of the present invention varies depending upon where mapping converter **126** is provisioned (as described below and shown in FIG. 4).

In step **208**, if location system **120** provides raw location information and mapping converter **126** is provisioned in user wireless network **102**, user wireless network **102** translates the raw location information to a displayable form before returning the location information to location server **100**. If location system **120** provides the location information in displayable form, or if location system **120** provides the location information in raw form and user wireless network **102** does not have a mapping converter, user wireless network **102** simply forwards the location information.

In step **210**, user wireless network **102** returns the location information, whether raw or displayable, to location server **100**. In step **212**, if the location information is in raw form and location server **100** contains mapping converter **126**, location server **100** translates the location information to displayable form. Finally, in step **214**, location server **100** returns the location information of the network user back to the requestor.

SPECIFIC EXAMPLES OF PREFERRED EMBODIMENTS

The benefits of the present invention apply to numerous situations in which a requestor wants to know the location of a network user. The most applicable situations involve network users that require a certain degree of supervision by another (the requestor). Examples of these types of network users include parolees, the elderly, and children. In each case, the present invention provides a location query service by making use of a wireless device that the network user would otherwise already be using for its primary purpose, e.g., a cellular telephone used for personal voice communication.

As another specific example, the present invention could be implemented in the context of an instant messaging service. A user could have an instant messaging service configured to display only the friends of that user who are in the same city as the user. When a friend's name appears on the user's instant messaging screen, the user may want the option to query for the location of the friend to determine, for example, whether the friend is near enough to have lunch and, if so, to select a restaurant that is conveniently located for the friend and the user. Using the present invention to obtain the location information would save the user from having to send a message to the friend asking for the location of the friend. The location query of the present invention could be explicit or implicit, occurring in the background of the instant messaging service, as a result of a configuration option or an action in the application.

The foregoing disclosure of embodiments of the present invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many variations and modifications of the embodiments described herein will be obvious to one of ordinary skill in the art in light of the above disclosure. The scope of the invention is to be defined only by the claims appended hereto, and by their equivalents.

What is claimed is:

1. A method for providing a location query service for use with a wireless network that tracks locations of network users, the method comprising:

receiving from a requester a query asking for location information associated with a wireless network user; determining whether the requestor is authorized to receive the requested location information and, if so, retrieving the location information associated with the wireless network user and forwarding the location information to the requestor;

if the requestor is unauthorized, determining whether the wireless network user will accept requests to release location information to unauthorized users;

if the requestor is unauthorized and the wireless network user is determined not to accept such requests, returning a message to the requestor that the request is denied;

if the requestor is unauthorized and the wireless network user is determined to accept such requests, forwarding to the wireless network user the requester identification and the request for the requestor to receive the location information;

if the wireless network user chooses not to release the requested location information to the unauthorized requestor, returning a message to the requestor that the request is denied; and

if the wireless network user chooses to release the requested location information to the unauthorized user, retrieving the location information associated with the wireless network user and forwarding the location information to the requester.

2. The method of claim 1, wherein the identification is one of a user name, a telephone number, an Internet address, and an email address.

3. The method of claim 1, wherein receiving and forwarding comprise communications over a global computer network.

4. The method of claim 1, wherein receiving and forwarding comprise communications over a Public Switched Telephone Network.

5. The method of claim 1, wherein retrieving the location information comprises identifying a wireless device associated with the wireless network user and determining a location of the wireless device.

6. The method claim 1, further comprising translating the location information from raw form to displayable form.

7. The method of claim 1, wherein retrieving the location information comprises using a location system to determine the location of a network device associated with the wireless network user.

8. The method of claim 1, wherein retrieving the location information comprises consulting a location database that is periodically updated by a location system.

9. Currently Amended) A system for providing a location query service with a wireless network in communication with a plurality of wireless network devices, the system comprising:

a location system in communication with the wireless network, the location system providing location information associated with the plurality of wireless network devices; and

a location server in communication with the wireless network and a plurality of requesters, wherein the location server is operative:

to determine whether the requestor is authorized to receive the requested location information associated with the network user and, if so, to retrieve the location information and forward that information to the requestor;

if the requester is unauthorized, to determine whether the network user will accept requests to release location information to unauthorized users;

if the requester is unauthorized and the network user is determined not to accept such requests, to return a message to the requestor that the request is denied;

if the requester is unauthorized and the wireless network user is determined to accept such requests, to send the access request to the network user about whom the requestor seeks location information, so as to determine whether the network user chooses to release the location information to the requester

if the network user chooses not to release the requested location information to the unauthorized requestor, to return a message to the requestor that the request is denied; and

if the network user chooses to release the requested location information to the unauthorized user, to retrieve the network user's location information provided by the location system and to forward the location information to the requester.

11

10. The system of claim **9**, wherein the location system is at least one of a handheld location system and a network-based location system.

11. The system of claim **10**, wherein the handheld location system is a global positioning system.

12. The system of claim **10**, wherein the network-based location system is one of a Wireless Access Protocol location service and a triangulation system.

13. The system of claim **9**, further comprising a mapping converter that translates the location information provided by the location system from raw form to displayable form.

14. The system of claim **9**, further comprising a global computer network in communication with the location server and the plurality of requesters, wherein the global computer network facilitates communication between the location server and the plurality of requesters.

15. The system of claim **14**, wherein the global computer network is the Internet.

16. The system of claim **14**, wherein the plurality of requesters have requestor devices with messaging capabilities and the global computer network facilitates messaging between the location server and the requester devices.

17. The system of claim **16**, wherein the message capabilities are one of audio-based, text-based, and graphical.

12

18. The system of claim **16**, wherein the global computer network includes a graphical user interface through which the plurality of requesters can submit location queries.

19. The system of claim **16**, wherein the requestor devices are Wireless Access Protocol compatible thin clients having thin browsers adapted to access the global computer network and to communicate with the location server.

20. The system of claim **16**, wherein the requestor devices are personal computers.

21. The system of claim **9**, further comprising a Public Switched Telephone Network in communication with the location server and the plurality of requesters, wherein the Public Switched Telephone Network facilitates communication between the location server and the plurality of requesters.

22. The system of claim **21**, wherein the Public Switched Telephone Network includes one of an interactive voice response unit and an automatic call distributor, through which the plurality of requesters can submit location queries.

* * * * *