US010655435B2

(12) **United States Patent**
Oehring et al.

(10) **Patent No.: US 10,655,435 B2**
(45) **Date of Patent: May 19, 2020**

(54) **SMART FRACTURING SYSTEM AND METHOD**

(71) Applicant: **U.S. Well Services, LLC**, Houston, TX (US)

(72) Inventors: **Jared Oehring**, Houston, TX (US); **Alexander James Christinzio**, Morgantown, WV (US); **Brandon N. Hinderliter**, Houston, TX (US)

(73) Assignee: **U.S. Well Services, LLC**, Houston, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/170,695**

(22) Filed: **Oct. 25, 2018**

(65) **Prior Publication Data**

US 2019/0120024 A1 Apr. 25, 2019

Related U.S. Application Data

(60) Provisional application No. 62/577,056, filed on Oct. 25, 2017.

(51) **Int. Cl.**
E21B 41/00 (2006.01)
E21B 43/26 (2006.01)

(52) **U.S. Cl.**
CPC ***E21B 41/0092*** (2013.01); ***E21B 43/26*** (2013.01)

(58) **Field of Classification Search**
CPC E21B 21/062; E21B 43/26; E21B 43/267; E21B 44/00
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,656,861 A 1/1928 Leonard
1,671,436 A 5/1928 Melott
(Continued)

FOREIGN PATENT DOCUMENTS

AU 2007340913 7/2008
CA 2406801 11/2001
(Continued)

OTHER PUBLICATIONS

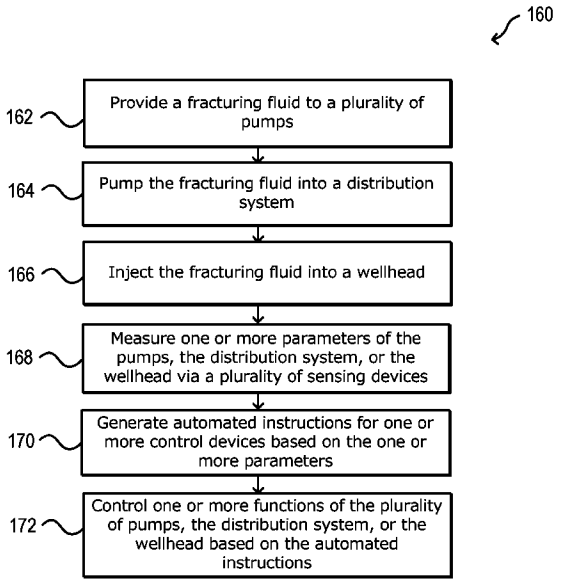
UK Power Networks—Transformers to Supply Heat to Tate Modern—from Press Releases May 16, 2013.
(Continued)

Primary Examiner — Jennifer H Gay
(74) *Attorney, Agent, or Firm* — Hogan Lovells US LLP

(57) **ABSTRACT**

A hydraulic fracturing system includes a plurality of pumps positioned at a wellsite and configured to pressurize a fracturing fluid, a distribution system fluidly coupled to receive and consolidate fracturing fluid from the plurality of pumps for injection into a wellhead. The hydraulic fracturing system further includes a control system, which includes a plurality of sensing devices configured to measure one or more parameters of the plurality of pumps and the distribution system, one or more processing device configured to receive and analyze the one or more parameters measured by the plurality of sensing devices and generate control instructions based at least in part on the one or more parameters, and one or more control device configured **110** to receive the control instructions and control one or more aspects of the plurality of pumps or the distribution system based on the control instructions.

19 Claims, 7 Drawing Sheets



(56) **References Cited**

U.S. PATENT DOCUMENTS

2,004,077 A 6/1935 McCartney
2,183,364 A 12/1939 Bailey
2,220,622 A 11/1940 Aitken
2,248,051 A 7/1941 Armstrong
2,407,796 A 9/1946 Page
2,416,848 A 3/1947 Rothery
2,753,940 A 7/1956 Bonner
3,061,039 A 10/1962 Peters
3,066,503 A 12/1962 Fleming
3,302,069 A 1/1967 Webster
3,334,495 A 8/1967 Jensen
3,722,595 A 3/1973 Kiel
3,764,233 A 10/1973 Strickland
3,773,140 A 11/1973 Mahajan
3,837,179 A 9/1974 Barth
3,849,662 A 11/1974 Blaskowski
3,881,551 A 5/1975 Terry
4,037,431 A 7/1977 Sugimoto
4,100,822 A 7/1978 Rosman
4,151,575 A 4/1979 Hogue
4,226,299 A 10/1980 Hansen
4,265,266 A 5/1981 Kierbow et al.
4,432,064 A 2/1984 Barker
4,442,665 A 4/1984 Fick et al.
4,456,092 A 6/1984 Kubozuka
4,506,982 A 3/1985 Smithers et al.
4,512,387 A 4/1985 Rodriguez
4,529,887 A 7/1985 Johnson
4,538,916 A 9/1985 Zimmerman
4,676,063 A 6/1987 Goebel et al.
4,759,674 A 7/1988 Schroder
4,793,386 A 12/1988 Sloan
4,845,981 A 7/1989 Pearson
4,922,463 A 5/1990 Del Zotto et al.
5,006,044 A 4/1991 Walker, Sr.
5,025,861 A 6/1991 Huber et al.
5,050,673 A 9/1991 Baldridge
5,130,628 A 7/1992 Owen
5,131,472 A 7/1992 Dees et al.
5,172,009 A 12/1992 Mohan
5,189,388 A 2/1993 Mosley
5,366,324 A 11/1994 Arlt
5,422,550 A 6/1995 McClanahan
5,548,093 A 8/1996 Sato
5,590,976 A 1/1997 Kilheffer et al.
5,655,361 A 8/1997 Kishi
5,736,838 A 4/1998 Dove et al.
5,755,096 A 5/1998 Holleyman
5,790,972 A 8/1998 Kohlenberger
5,865,247 A 2/1999 Paterson
5,879,137 A 3/1999 Yie
5,894,888 A 4/1999 Wiemers
5,907,970 A 6/1999 Havlovick et al.
6,138,764 A 10/2000 Scarsdale et al.
6,142,878 A 11/2000 Barin
6,164,910 A 12/2000 Mayleben
6,202,702 B1 3/2001 Ohira
6,208,098 B1 3/2001 Kume
6,254,462 B1 7/2001 Kelton
6,271,637 B1 8/2001 Kushion
6,273,193 B1 8/2001 Hermann
6,315,523 B1 11/2001 Mills
6,477,852 B2 11/2002 Dodo
6,484,490 B1 11/2002 Olsen
6,491,098 B1 12/2002 Dallas
6,529,135 B1 3/2003 Bowers et al.
6,776,227 B2 8/2004 Beida
6,802,690 B2 10/2004 Han
6,808,303 B2 10/2004 Fisher
6,931,310 B2 8/2005 Shimizu et al.
6,936,947 B1 8/2005 Leijon
7,082,993 B2 8/2006 Ayoub
7,104,233 B2 9/2006 Ryczek et al.
7,170,262 B2 1/2007 Pettigrew
7,173,399 B2 2/2007 Sihler
7,308,933 B1 12/2007 Mayfield
7,312,593 B1 12/2007 Streicher et al.
7,336,514 B2 2/2008 Amarillas
7,445,041 B2 11/2008 O'Brien
7,494,263 B2 2/2009 Dykstra et al.
7,500,642 B2 3/2009 Cunningham
7,525,264 B2 4/2009 Dodge
7,563,076 B2 7/2009 Brunet
7,581,379 B2 9/2009 Yoshida
7,675,189 B2 3/2010 Grenier
7,683,499 B2 3/2010 Saucier
7,717,193 B2 5/2010 Egilsson et al.
7,755,310 B2 7/2010 West et al.
7,807,048 B2 10/2010 Collette
7,835,140 B2 11/2010 Mori
7,845,413 B2 12/2010 Shampine et al.
7,926,562 B2 4/2011 Poitzsch
7,894,757 B2 7/2011 Keast
7,977,824 B2 7/2011 Halen et al.
8,037,936 B2 10/2011 Neuroth
8,054,084 B2 11/2011 Schulz et al.
8,083,504 B2 12/2011 Williams
8,096,354 B2 1/2012 Poitzsch
8,096,891 B2 1/2012 Lochtefeld
8,139,383 B2 3/2012 Efraimsson
8,146,665 B2 4/2012 Neal
8,154,419 B2 4/2012 Daussin et al.
8,232,892 B2 7/2012 Overholt et al.
8,261,528 B2 9/2012 Chillar
8,272,439 B2 9/2012 Strickland
8,310,272 B2 11/2012 Quarto
8,354,817 B2 1/2013 Yeh et al.
8,474,521 B2 7/2013 Kajaria
8,534,235 B2 9/2013 Chandler
8,573,303 B2 11/2013 Kerfoot
8,596,056 B2 12/2013 Woodmansee
8,616,005 B1 12/2013 Cousino
8,616,274 B2 12/2013 Belcher et al.
8,646,521 B2 2/2014 Bowen
8,692,408 B2 4/2014 Zhang et al.
8,727,068 B2 5/2014 Bruin
8,760,657 B2 6/2014 Pope
8,774,972 B2 * 7/2014 Rusnak F04D 15/0066 415/122.1
8,789,601 B2 7/2014 Broussard
8,800,652 B2 8/2014 Bartko
8,807,960 B2 8/2014 Stephenson
8,838,341 B2 9/2014 Kumano
8,851,860 B1 10/2014 Mail
8,857,506 B2 10/2014 Stone, Jr.
8,899,940 B2 12/2014 Laugemors
8,905,056 B2 12/2014 Kendrick
8,905,138 B2 12/2014 Lundstedt et al.
8,997,904 B2 4/2015 Cryer
9,018,881 B2 4/2015 Mao et al.
9,051,822 B2 6/2015 Ayan
9,067,182 B2 6/2015 Nichols
9,103,193 B2 8/2015 Coli
9,119,326 B2 8/2015 McDonnell
9,121,257 B2 9/2015 Coli et al.
9,140,110 B2 9/2015 Coli et al.
9,160,168 B2 10/2015 Chapel
9,175,554 B1 11/2015 Watson
9,206,684 B2 12/2015 Parra
9,322,239 B2 4/2016 Angeles Boza et al.
9,366,114 B2 6/2016 Coli et al.
9,410,410 B2 8/2016 Broussard et al.
9,450,385 B2 9/2016 Kristensen
9,458,687 B2 10/2016 Hallundbaek
9,475,020 B2 10/2016 Coli et al.
9,475,021 B2 10/2016 Coli et al.
9,534,473 B2 1/2017 Morris et al.
9,562,420 B2 2/2017 Morris et al.
9,587,649 B2 3/2017 Oehring
9,611,728 B2 4/2017 Oehring
9,650,871 B2 * 5/2017 Oehring E21B 41/0021
9,650,879 B2 5/2017 Broussard et al.
9,728,354 B2 8/2017 Skolozdra
9,738,461 B2 8/2017 DeGaray

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,745,840	B2	8/2017	Oehring et al.	
9,840,901	B2 *	12/2017	Oehring	E21B 43/26
9,863,228	B2	1/2018	Shampine et al.	
9,893,500	B2	2/2018	Oehring	
9,915,128	B2	3/2018	Hunter	
9,932,799	B2	4/2018	Symchuk	
9,963,961	B2	5/2018	Hardin	
9,970,278	B2 *	5/2018	Broussard	E21B 43/26
9,976,351	B2	5/2018	Randall	
9,995,218	B2	6/2018	Oehring	
10,008,880	B2	6/2018	Vicknair	
10,020,711	B2	7/2018	Oehring	
10,036,238	B2	7/2018	Oehring	
10,107,086	B2	10/2018	Oehring	
10,119,381	B2 *	11/2018	Oehring	F04B 23/00
10,196,878	B2	2/2019	Hunter	
10,227,854	B2	3/2019	Glass	
10,232,332	B2	3/2019	Oehring	
10,246,984	B2	4/2019	Payne	
10,254,732	B2	4/2019	Oehring	
10,260,327	B2	4/2019	Kajaria	
10,280,724	B2	5/2019	Hinderliter	
10,287,873	B2	5/2019	Filas	
10,309,205	B2	6/2019	Randall	
10,371,012	B2	8/2019	Davis	
10,378,326	B2	8/2019	Morris	
10,393,108	B2	8/2019	Chong	
10,407,990	B2	9/2019	Oehring	
10,436,026	B2	10/2019	Dunadjela	
2002/0169523	A1	11/2002	Ross et al.	
2003/0056514	A1	3/2003	Lohn	
2003/0138327	A1	7/2003	Jones et al.	
2004/0040746	A1	3/2004	Niedermayr	
2004/0102109	A1	5/2004	Cratty et al.	
2004/0167738	A1	8/2004	Miller	
2005/0061548	A1	3/2005	Hooper	
2005/0116541	A1	6/2005	Seiver	
2005/0274508	A1	12/2005	Folk	
2006/0052903	A1	3/2006	Bassett	
2006/0260331	A1	11/2006	Andreychuk	
2007/0131410	A1	6/2007	Hill	
2007/0187163	A1	8/2007	Cone	
2007/0201305	A1	8/2007	Heilman et al.	
2007/0226089	A1	9/2007	DeGaray et al.	
2007/0277982	A1	12/2007	Shampine	
2007/0278140	A1	12/2007	Mallet et al.	
2008/0017369	A1	1/2008	Sarada	
2008/0041596	A1	2/2008	Blount	
2008/0112802	A1	5/2008	Orlando	
2008/0137266	A1	6/2008	Jensen	
2008/0208478	A1	8/2008	Ella et al.	
2008/0217024	A1	9/2008	Moore	
2008/0236818	A1	10/2008	Dykstra	
2008/0264625	A1	10/2008	Ochoa	
2008/0264640	A1	10/2008	Eslinger	
2008/0264649	A1	10/2008	Crawford	
2009/0045782	A1	2/2009	Datta	
2009/0065299	A1	3/2009	Vito	
2009/0078410	A1	3/2009	Krenek et al.	
2009/0090504	A1	4/2009	Weightman	
2009/0093317	A1	4/2009	Kajiwara et al.	
2009/0095482	A1	4/2009	Surjaatmadja	
2009/0145611	A1	6/2009	Pallini, Jr.	
2009/0153354	A1	6/2009	Daussin et al.	
2009/0188181	A1	7/2009	Forbis	
2009/0200035	A1	8/2009	Bjerkreim et al.	
2009/0260826	A1	10/2009	Sherwood	
2009/0308602	A1	12/2009	Bruins et al.	
2010/0000508	A1	1/2010	Chandler	
2010/0019574	A1	1/2010	Baldassarre et al.	
2010/0038907	A1	2/2010	Hunt	
2010/0045109	A1	2/2010	Arnold	
2010/0051272	A1	3/2010	Loree et al.	
2010/0101785	A1	4/2010	Khvoshchev	
2010/0132949	A1	6/2010	DeFosse et al.	
2010/0146981	A1	6/2010	Motakef	
2010/0172202	A1	7/2010	Borgstadt	
2010/0200224	A1	8/2010	Nguete	
2010/0250139	A1	9/2010	Hobbs et al.	
2010/0293973	A1	11/2010	Erickson	
2010/0303655	A1	12/2010	Scekic	
2010/0322802	A1	12/2010	Kugelev	
2011/0005757	A1	1/2011	Hebert	
2011/0017468	A1	1/2011	Birch et al.	
2011/0061855	A1	3/2011	Case et al.	
2011/0085924	A1	4/2011	Shampine	
2011/0166046	A1	7/2011	Weaver	
2011/0247878	A1	10/2011	Rasheed	
2011/0272158	A1	11/2011	Neal	
2012/0018016	A1	1/2012	Gibson	
2012/0049625	A1	3/2012	Hopwood	
2012/0085541	A1	4/2012	Love et al.	
2012/0127635	A1	5/2012	Grindeland	
2012/0205301	A1	8/2012	McGuire et al.	
2012/0205400	A1	8/2012	DeGaray et al.	
2012/0222865	A1	9/2012	Larson	
2012/0232728	A1	9/2012	Karimi et al.	
2012/0247783	A1	10/2012	Berner, Jr.	
2012/0255734	A1	10/2012	Coli et al.	
2013/0009469	A1	1/2013	Gillett	
2013/0025706	A1	1/2013	DeGaray et al.	
2013/0175038	A1	7/2013	Conrad	
2013/0175039	A1	7/2013	Guidry	
2013/0199617	A1	8/2013	DeGaray et al.	
2013/0233542	A1	9/2013	Shampine	
2013/0306322	A1	11/2013	Sanborn et al.	
2013/0341029	A1	12/2013	Roberts et al.	
2013/0343858	A1	12/2013	Flusche	
2014/0000899	A1	1/2014	Nevison	
2014/0010671	A1	1/2014	Cryer et al.	
2014/0054965	A1	2/2014	Jain	
2014/0060658	A1	3/2014	Hains	
2014/0095114	A1 *	4/2014	Thomeer	G06Q 10/20 702/187
2014/0096974	A1	4/2014	Coli	
2014/0124162	A1	5/2014	Leavitt	
2014/0138079	A1	5/2014	Broussard et al.	
2014/0174717	A1	6/2014	Broussard et al.	
2014/0219824	A1	8/2014	Burnette	
2014/0246211	A1	9/2014	Guidry et al.	
2014/0251623	A1	9/2014	Lestz et al.	
2014/0255214	A1	9/2014	Burnette	
2014/0277772	A1 *	9/2014	Lopez	F04D 13/12 700/282
2014/0290768	A1 *	10/2014	Randle	E21B 43/26 137/565.16
2014/0379300	A1 *	12/2014	Devine	F04B 51/00 702/182
2015/0027712	A1	1/2015	Vicknair	
2015/0053426	A1	2/2015	Smith	
2015/0068724	A1	3/2015	Coli et al.	
2015/0068754	A1	3/2015	Coli et al.	
2015/0075778	A1	3/2015	Walters	
2015/0083426	A1	3/2015	Lesko	
2015/0097504	A1	4/2015	Lamascus	
2015/0114652	A1	4/2015	Lestz	
2015/0136043	A1	5/2015	Shaaban	
2015/0144336	A1	5/2015	Hardin et al.	
2015/0159911	A1	6/2015	Holt	
2015/0175013	A1	6/2015	Cryer et al.	
2015/0176386	A1	6/2015	Castillo et al.	
2015/0211512	A1	7/2015	Wiegman	
2015/0211524	A1	7/2015	Broussard	
2015/0217672	A1	8/2015	Shampine	
2015/0225113	A1	8/2015	Lungu	
2015/0252661	A1	9/2015	Glass	
2015/0300145	A1	10/2015	Coli et al.	
2015/0314225	A1	11/2015	Coli et al.	
2015/0330172	A1	11/2015	Allmaras	
2015/0354322	A1	12/2015	Vicknair	
2016/0032703	A1 *	2/2016	Broussard	E21B 43/26 166/250.01
2016/0102537	A1 *	4/2016	Lopez	E21B 43/26 700/282

(56) **References Cited**

U.S. PATENT DOCUMENTS

2016/0105022	A1	4/2016	Oehring	
2016/0160889	A1	6/2016	Hoffman et al.	
2016/0177675	A1	6/2016	Morris et al.	
2016/0177678	A1	6/2016	Morris	
2016/0186531	A1	6/2016	Harkless et al.	
2016/0208592	A1*	7/2016	Oehring	H02K 9/04
2016/0208593	A1	7/2016	Coli et al.	
2016/0208594	A1	7/2016	Coli et al.	
2016/0208595	A1	7/2016	Tang	
2016/0221220	A1	8/2016	Paige	
2016/0230524	A1	8/2016	Dumoit	
2016/0230525	A1	8/2016	Lestz et al.	
2016/0258267	A1	9/2016	Payne et al.	
2016/0265457	A1	9/2016	Stephenson	
2016/0273328	A1	9/2016	Oehring	
2016/0281484	A1	9/2016	Lestz	
2016/0290114	A1*	10/2016	Oehring	E21B 43/26
2016/0290563	A1	10/2016	Diggins	
2016/0312108	A1	10/2016	Lestz et al.	
2016/0319650	A1	11/2016	Oehring	
2016/0326854	A1	11/2016	Broussard	
2016/0326855	A1	11/2016	Coli et al.	
2016/0341281	A1	11/2016	Brunvold et al.	
2016/0348479	A1	12/2016	Oehring	
2016/0349728	A1	12/2016	Oehring	
2016/0369609	A1	12/2016	Morris et al.	
2017/0016433	A1	1/2017	Chong	
2017/0021318	A1	1/2017	McIver et al.	
2017/0022788	A1*	1/2017	Oehring	E21B 41/0021
2017/0022807	A1	1/2017	Dursun	
2017/0028368	A1*	2/2017	Oehring	B28C 9/04
2017/0030177	A1	2/2017	Oehring et al.	
2017/0030178	A1*	2/2017	Oehring	F04B 47/02
2017/0036178	A1	2/2017	Coli et al.	
2017/0036872	A1	2/2017	Wallace et al.	
2017/0037717	A1*	2/2017	Oehring	F04B 23/00
2017/0037718	A1	2/2017	Coli et al.	
2017/0051732	A1	2/2017	Hemandez et al.	
2017/0096885	A1*	4/2017	Oehring	E21B 43/26
2017/0104389	A1	4/2017	Morris et al.	
2017/0114625	A1	4/2017	Norris	
2017/0145918	A1	5/2017	Oehring	
2017/0146189	A1	5/2017	Herman	
2017/0159570	A1	6/2017	Bickert	
2017/0218727	A1	8/2017	Oehring	
2017/0218843	A1	8/2017	Oehring	
2017/0222409	A1	8/2017	Oehring	
2017/0226839	A1	8/2017	Broussard	
2017/0226842	A1*	8/2017	Omont	E21B 33/13
2017/0234250	A1	8/2017	Janik	
2017/0241221	A1	8/2017	Seshadri	
2017/0259227	A1	9/2017	Morris et al.	
2017/0292513	A1*	10/2017	Haddad	E21B 41/0092
2017/0313499	A1	11/2017	Hughes et al.	
2017/0314380	A1	11/2017	Oehring	
2017/0314979	A1	11/2017	Ye	
2017/0328179	A1	11/2017	Dykstra	
2017/0369258	A1	12/2017	DeGaray	
2018/0028992	A1	2/2018	Stegemoeller	
2018/0038216	A1*	2/2018	Zhang	E21B 43/26
2018/0156210	A1	6/2018	Oehring	
2018/0183219	A1	6/2018	Oehring	
2018/0216455	A1	8/2018	Andreychuk	
2018/0245428	A1	8/2018	Richards	
2018/0258746	A1	9/2018	Broussard	
2018/0274446	A1	9/2018	Oehring	
2018/0320483	A1*	11/2018	Zhang	E21B 41/0092
2018/0363437	A1	12/2018	Coli et al.	
2019/0003329	A1	1/2019	Morris	
2019/0010793	A1	1/2019	Hinderliter	
2019/0063309	A1	2/2019	Davis	
2019/0100989	A1	4/2019	Stewart	
2019/0112910	A1*	4/2019	Oehring	E21B 43/26
2019/0120024	A1*	4/2019	Oehring	E21B 41/0092
2019/0128080	A1	5/2019	Ross	
2019/0162061	A1	5/2019	Stephenson	
2019/0169971	A1	6/2019	Oehring	
2019/0178057	A1	6/2019	Hunter	
2019/0178235	A1	6/2019	Coskrey	
2019/0203567	A1	7/2019	Ross	
2019/0203572	A1	7/2019	Morris	
2019/0211661	A1	7/2019	Reckels	
2019/0226317	A1	7/2019	Payne	
2019/0245348	A1	8/2019	Hinderliter	
2019/0292866	A1	9/2019	Ross	
2019/0292891	A1	9/2019	Kajaria	
2019/0316447	A1	10/2019	Oehring	

FOREIGN PATENT DOCUMENTS

CA	2707269	12/2010
CA	2482943	5/2011
CA	3050131	11/2011
CA	2955706	10/2012
CA	2966672	10/2012
CA	3000322	4/2013
CA	2787814	2/2014
CA	2833711	5/2014
CA	2978706	9/2016
CA	2944980	2/2017
CA	3006422	6/2017
CA	3018485	8/2017
CA	2964593	10/2017
CA	2849825	7/2018
CA	2919649	2/2019
CA	2919666	7/2019
CA	2797081	9/2019
CA	2945579	10/2019
CN	201687513	12/2010
CN	101977016	2/2011
CN	202023547	11/2011
CN	102602322	7/2012
JP	2004264589	9/2004
WO	2016/144939	9/2016
WO	2016/160458	10/2016

OTHER PUBLICATIONS

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/293,681 dated Feb. 16, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/294,349 dated Mar. 14, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Jan. 20, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,443 dated Feb. 7, 2017.

Notice of Allowance issued in corresponding U.S. Appl. No. 15/217,040 dated Mar. 28, 2017.

Notice of Allowance issued in corresponding U.S. Appl. No. 14/622,532 dated Mar. 27, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/291,842 dated Jan. 6, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Dec. 7, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated May 17, 2016.

Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Dec. 21, 2015.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Aug. 5, 2015.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Sep. 12, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/217,040 dated Nov. 29, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/235,788 dated Dec. 14, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated May 15, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/486,970 dated Jun. 22, 2017.

(56) **References Cited**

OTHER PUBLICATIONS

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,656 dated Jun. 23, 2017.
Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,694 dated Jun. 26, 2017.
Final Office Action issued in corresponding U.S. Appl. No. 15/294,349 dated Jul. 6, 2017.
Non-Final Office Action issued in corresponding U.S. Appl. No. 14/884,363 dated Sep. 5, 2017.
Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Sep. 6, 2017.
Non-Final Office Action issued in corresponding U.S. Appl. No. 14/881,535 dated Oct. 6, 2017.
Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,414 dated Nov. 29, 2017.
Non-Final Office Action issued in corresponding U.S. Appl. No. 15/644,487 dated Nov. 13, 2017.
Canadian Office Action dated Mar. 2, 2018 in related Canadian Patent Application No. 2,833,711.
Office Action dated Apr. 10, 2018 in related U.S. Appl. No. 15/294,349.
Office Action dated Apr. 2, 2018 in related U.S. Appl. No. 15/183,387.
Office Action dated May 29, 2018 in related U.S. Appl. No. 15/235,716.
Candian Office Action dated Apr. 18, 2018 in related Canadian Patent Application No. 2,928,711.
Canadian Office Action dated Jun. 22, 2018 in related Canadian Patent Application No. 2,886,697.
Office Action dated Jul. 25, 2018 in related U.S. Appl. No. 15/644,487.
Office Action dated Oct. 4, 2018 in related U.S. Appl. No. 15/217,081.
International Search Report and Written Opinion dated Sep. 19, 2018 in related PCT Patent Application No. PCT/US2018/040683.
Canadian Office Action dated Sep. 28, 2018 in related Canadian Patent Application No. 2,945,281.
Office Action dated Dec. 12, 2018 in related U.S. Appl. No. 16/160,708.
International Search Report and Written Opinion dated Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54542.
International Search Report and Written Opinion dated Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54548.
International Search Report and Written Opinion dated Dec. 31, 2018 in related PCT Patent Application No. PCT/US18/55913.
International Search Report and Written Opinion dated Jan. 4, 2019 in related PCT Patent Application No. PCT/US18/57539.
Office Action dated Jan. 30, 2019 in related Canadian Patent Application No. 2,936,997.
International Search Report and Written Opinion dated Feb. 15, 2019 in related PCT Application No. PCT/US18/63977.
Non-Final Office Action dated Feb. 25, 2019 in related U.S. Appl. No. 16/210,749.
International Search Report and Written Opinion dated Mar. 5, 2019 in related PCT Application No. PCT/US18/63970.
Non-Final Office Action dated Mar. 6, 2019 in related U.S. Appl. No. 15/183,387.
Office Action dated Mar. 1, 2019 in related Canadian Patent Application No. 2,943,275.
International Search Report and Written Opinion dated Apr. 10, 2019 in corresponding PCT Application No. PCT/US2019/016635.
Notice of Allowance dated Apr. 23, 2019 in corresponding U.S. Appl. No. 15/635,028.
Schlumberger, "Jet Manual 23, Fracturing Pump Units, SPF/SPS-343, Version 1.0," Jan. 31, 2007, 68 pages.
Stewart & Stevenson, "Stimulation Systems," 2007, 20 pages.
Luis Gamboa, "Variable Frequency Drives in Oil and Gas Pumping Systems," Dec. 17, 2011, 5 pages.
"Griswold Model 811 Pumps: Installation, Operation and Maintenance Manual, ANSI Process Pump," 2010, 60 pages.
International Search Report and Written Opinion dated Jul. 9, 2019 in corresponding PCT Application No. PCT/US2019/027584.
Office Action dated Jun. 11, 2019 in corresponding U.S. Appl. No. 16/210,749.
Office Action dated May 10, 2019 in corresponding U.S. Appl. No. 16/268,030.
Canadian Office Action dated May 30, 2019 in corresponding CA Application No. 2,833,711.
Canadian Office Action dated Jun. 20, 2019 in corresponding CA Application No. 2,964,597.
International Search Report and Written Opinion dated Sep. 11, 2019 in related PCT Application No. PCT/US2019/037493.
Office Action dated Aug. 19, 2019 in related U.S. Appl. No. 15/356,436.
Office Action dated Oct. 2, 2019 in related U.S. Appl. No. 16/152,732.
Office Action dated Sep. 11, 2019 in related U.S. Appl. No. 16/268,030.
Office Action dated Oct. 11, 2019 in related U.S. Appl. No. 16/385,070.
Office Action dated Sep. 3, 2019 in related U.S. Appl. No. 15/994,772.
Office Action dated Sep. 20, 2019 in related U.S. Appl. No. 16/443,273.
Canadian Office Action dated Oct. 1, 2019 in related Canadian Patent Application No. 2,936,997.
International Search Report and Written Opinion dated Jan. 2, 2020 in related PCT Application No. PCT/US19/55325.
Notice of Allowance dated Jan. 9, 2020 in related U.S. Appl. No. 16/570,331.
Non-Final Office Action dated Dec. 23, 2019 in related U.S. Appl. No. 16/597,008.
Non-Final Office Action dated Jan. 10, 2020 in related U.S. Appl. No. 16/597,014.
Non-Final Office Action dated Dec. 6, 2019 in related U.S. Appl. No. 16/564,186.
International Search Report and Written Opinion dated Nov. 26, 2019 in related PCT Application No. PCT/US19/51018.
Non-Final Office Action issued in U.S. Appl. No. 16/152,695 dated Mar. 3, 2020.
International Search Report and Written Opinion issued in Application No. PCT/US2019/055323 dated Feb. 11, 2020.

* cited by examiner

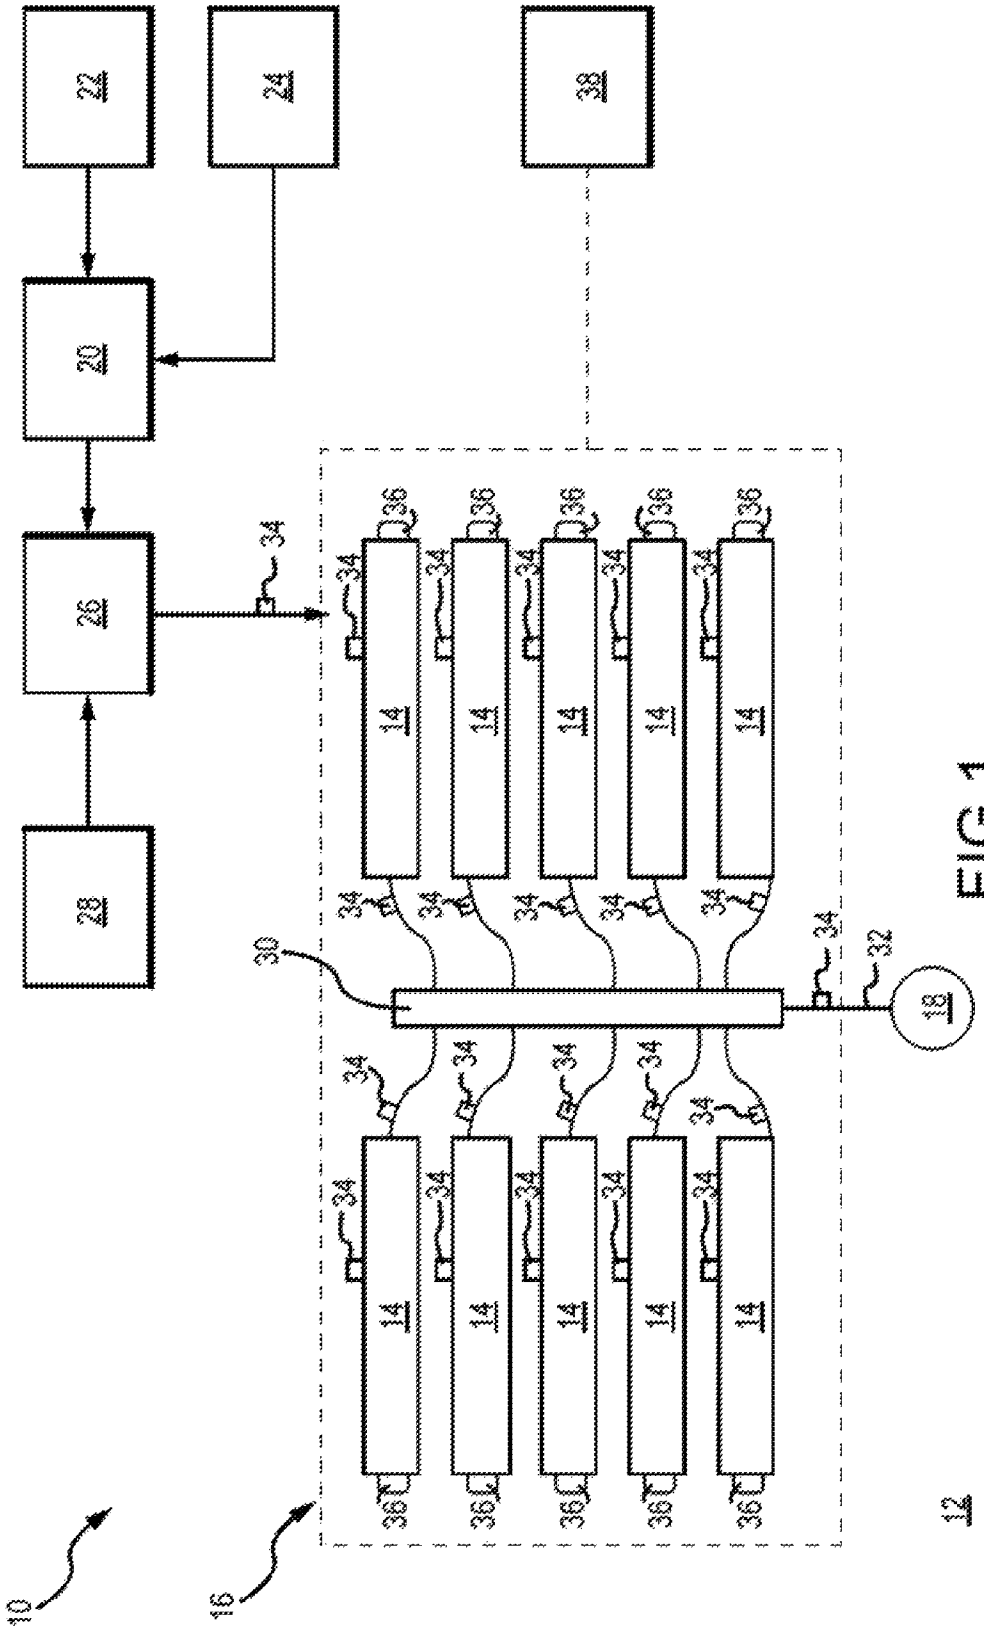


FIG. 1

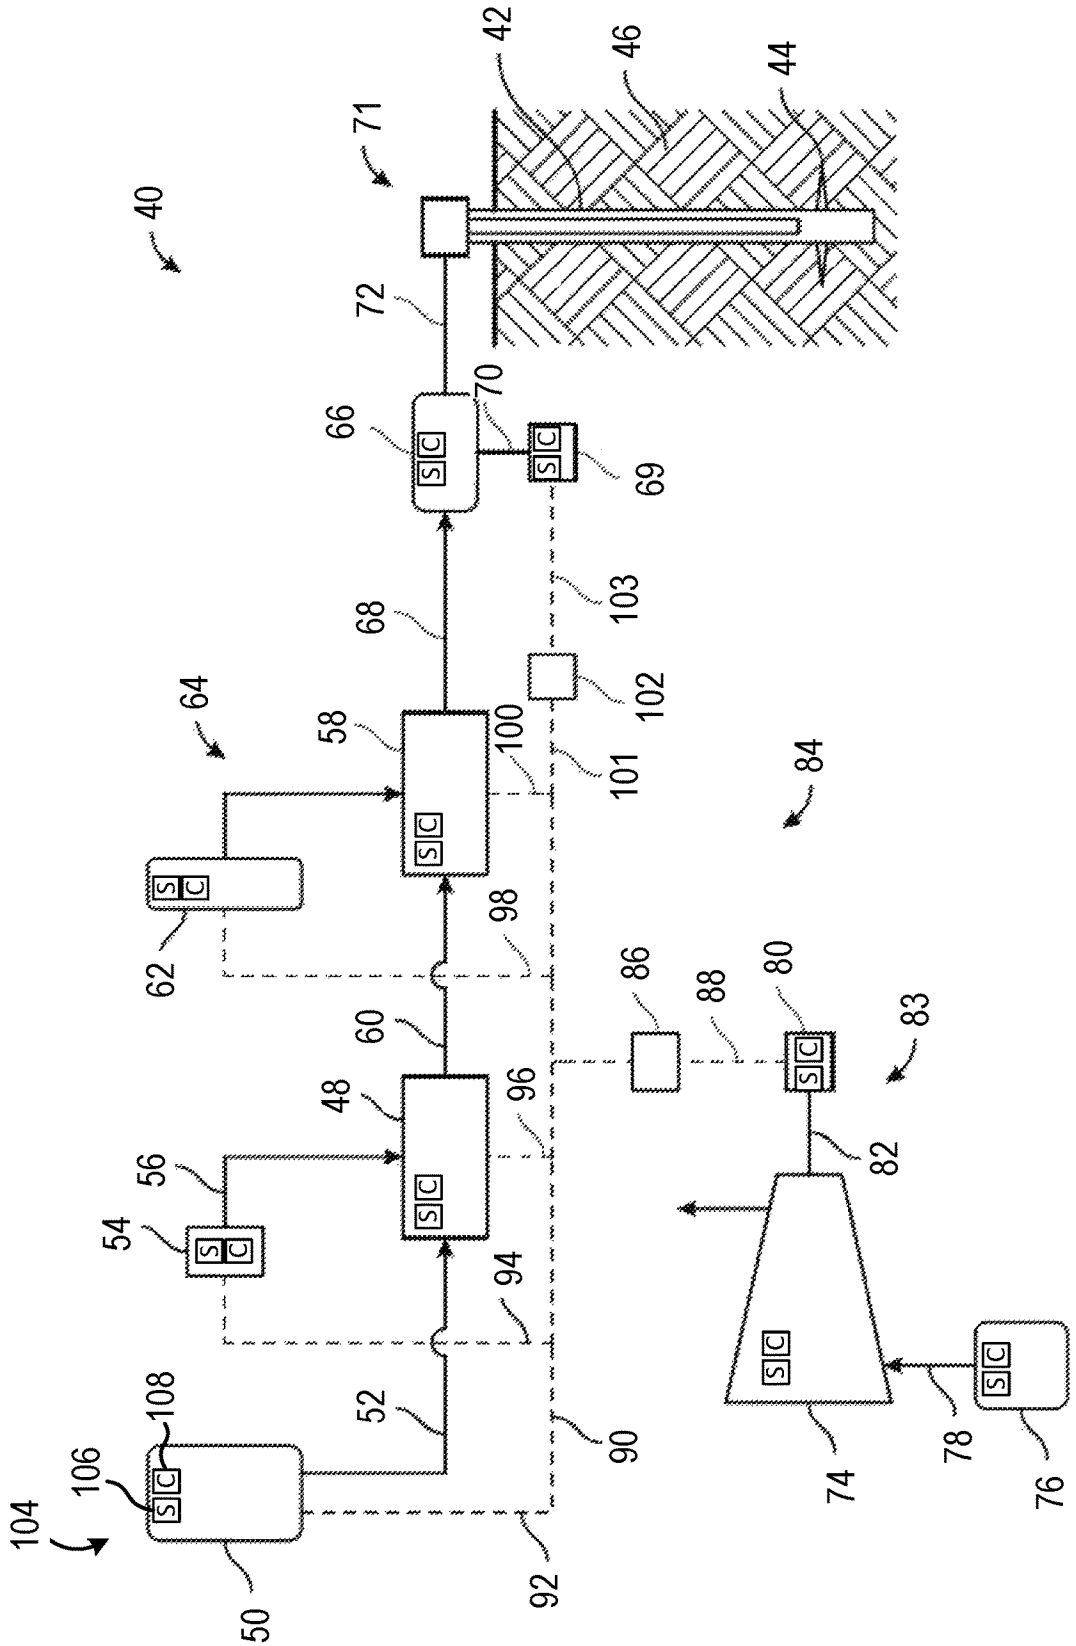

40
42
46
44
71
72
70
66
69
68
103
102
64
58
100
101
84
62
98
86
88
80
83
60
48
96
56
54
94
82
52
90
108
106
104
50
92
74
78
76

FIG.2

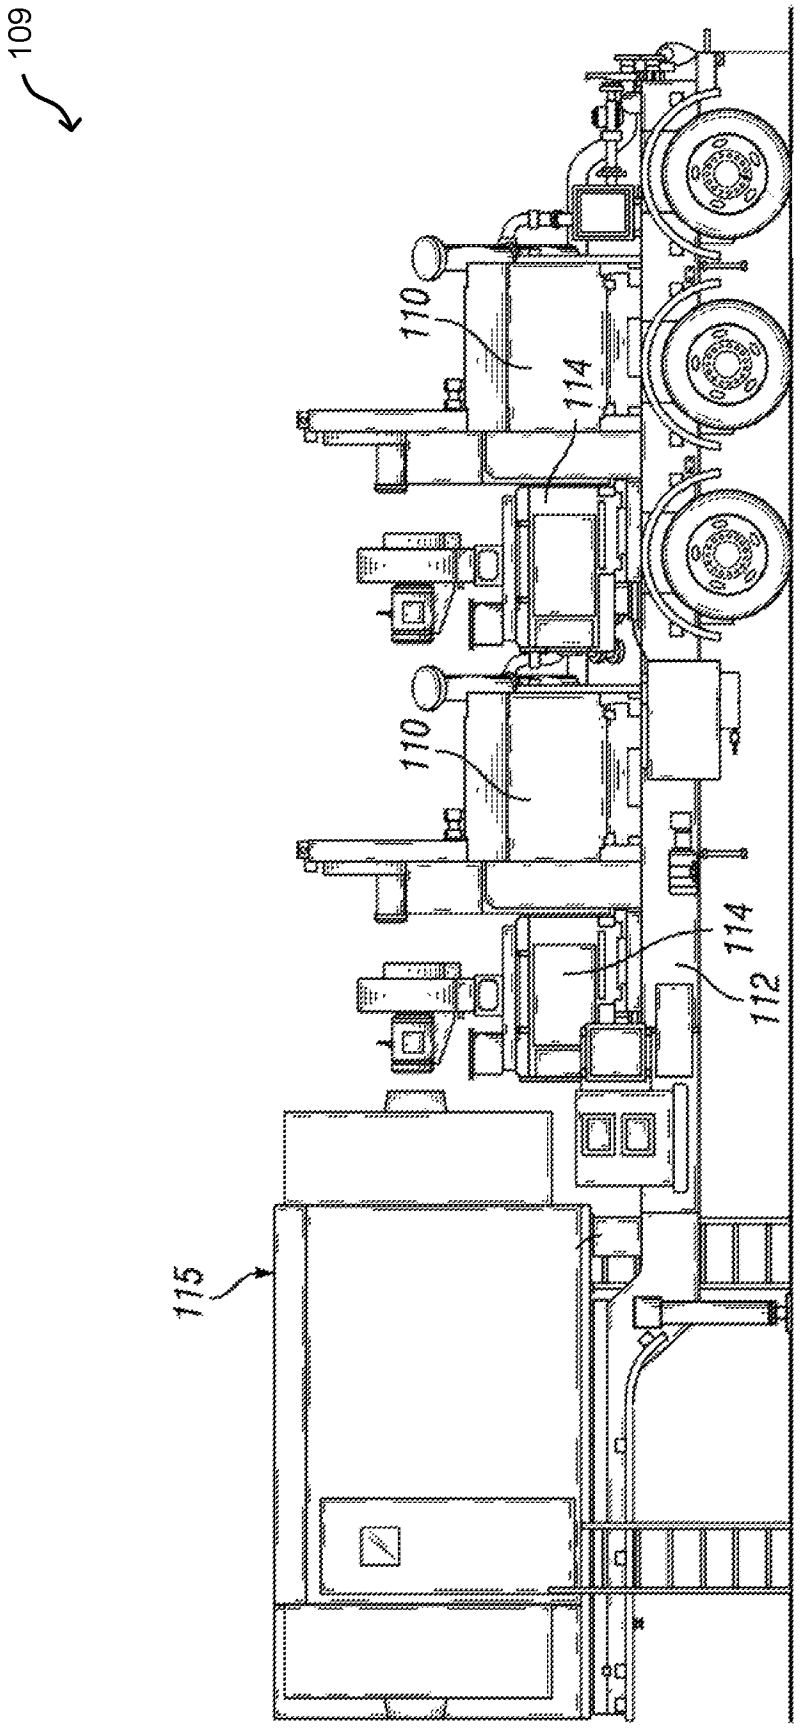


FIG.3

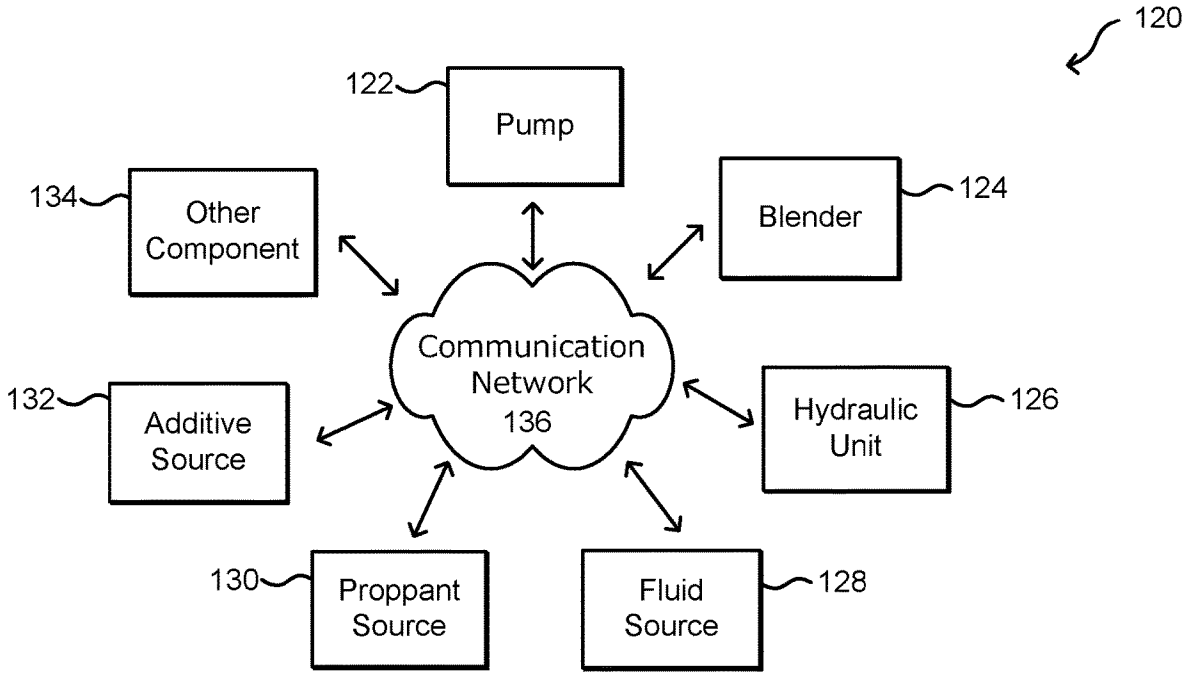

120
122
Pump
134
Other Component
Blender
124
Communication Network 136
132
Additive Source
Hydraulic Unit
126
130
Proppant Source
Fluid Source
128

FIG.4

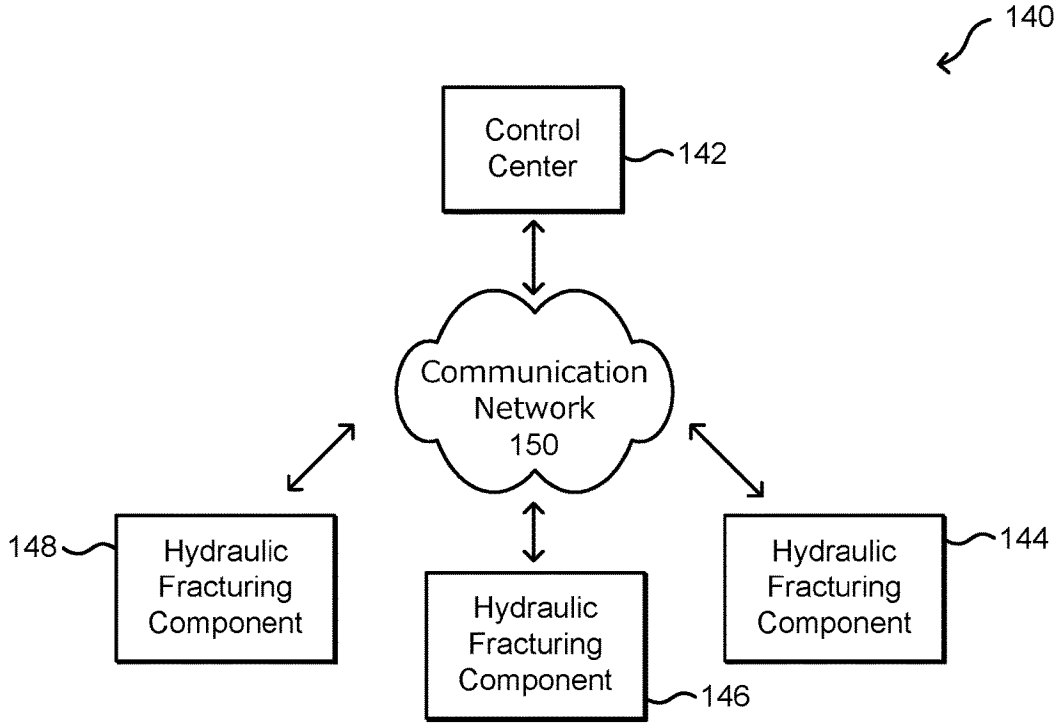

140
Control Center
142
Communication Network 150
148
Hydraulic Fracturing Component
Hydraulic Fracturing Component
144
Hydraulic Fracturing Component
146

FIG.5

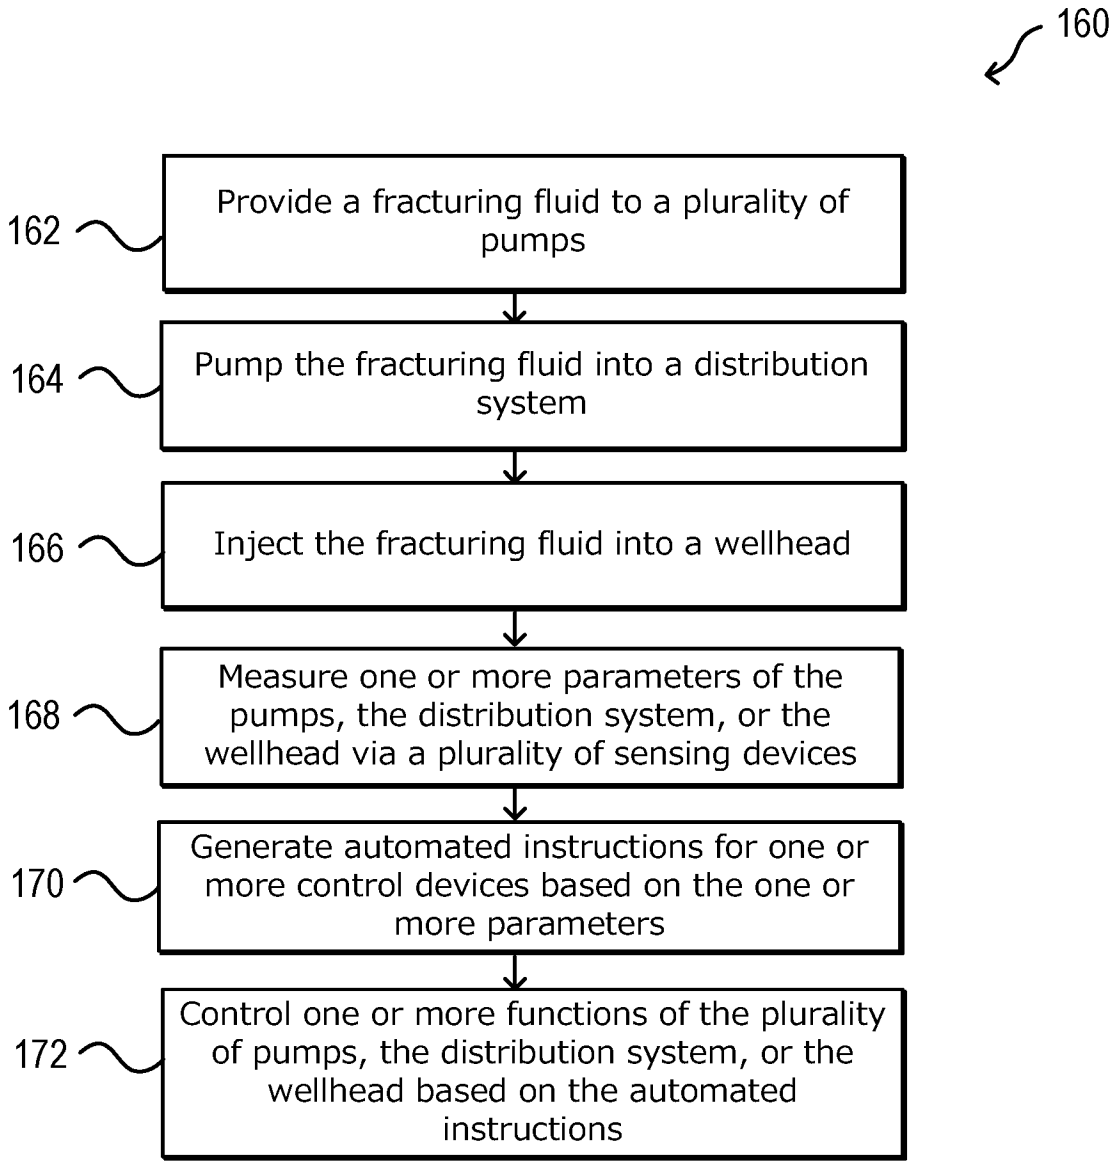

160
162
Provide a fracturing fluid to a plurality of pumps
164
Pump the fracturing fluid into a distribution system
166
Inject the fracturing fluid into a wellhead
168
Measure one or more parameters of the pumps, the distribution system, or the wellhead via a plurality of sensing devices
170
Generate automated instructions for one or more control devices based on the one or more parameters
172
Control one or more functions of the plurality of pumps, the distribution system, or the wellhead based on the automated instructions

FIG.6

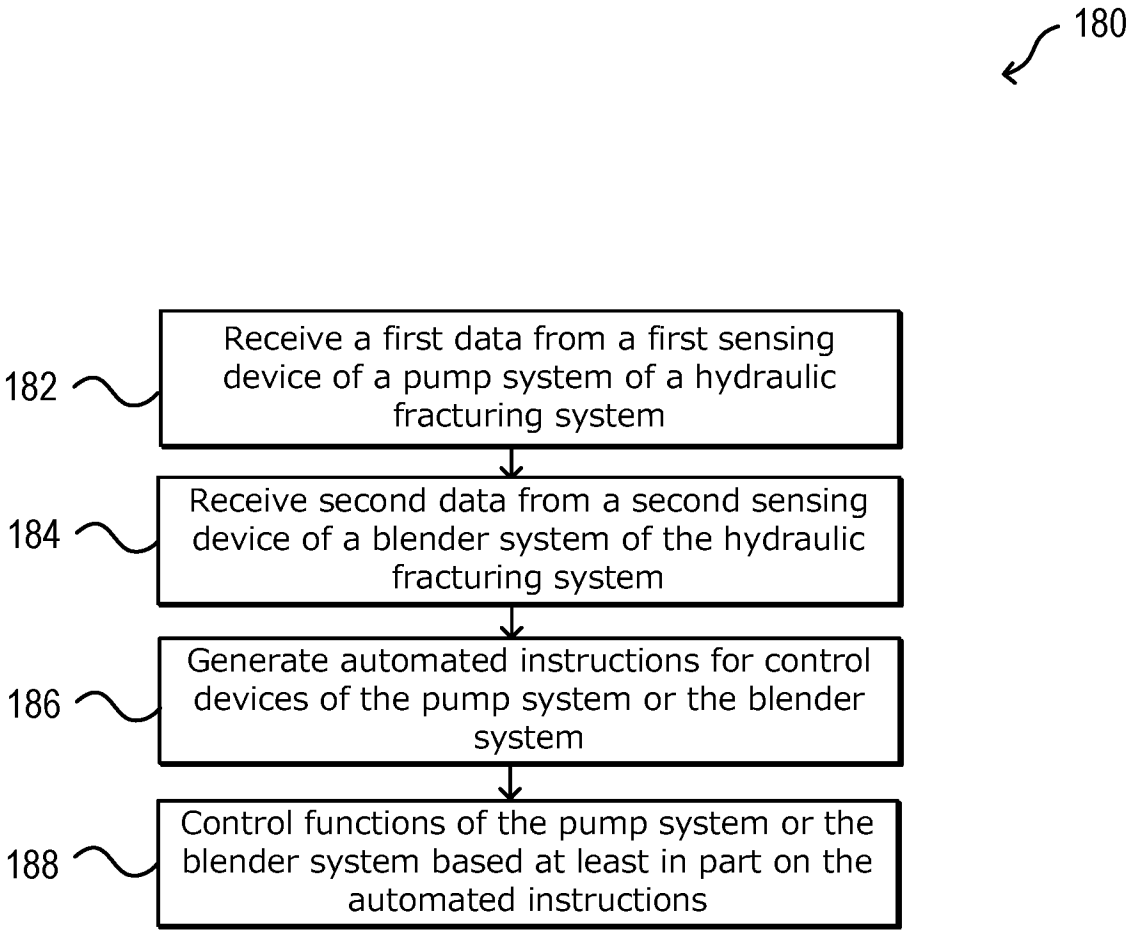

180
182
Receive a first data from a first sensing device of a pump system of a hydraulic fracturing system
184
Receive second data from a second sensing device of a blender system of the hydraulic fracturing system
186
Generate automated instructions for control devices of the pump system or the blender system
188
Control functions of the pump system or the blender system based at least in part on the automated instructions

FIG.7

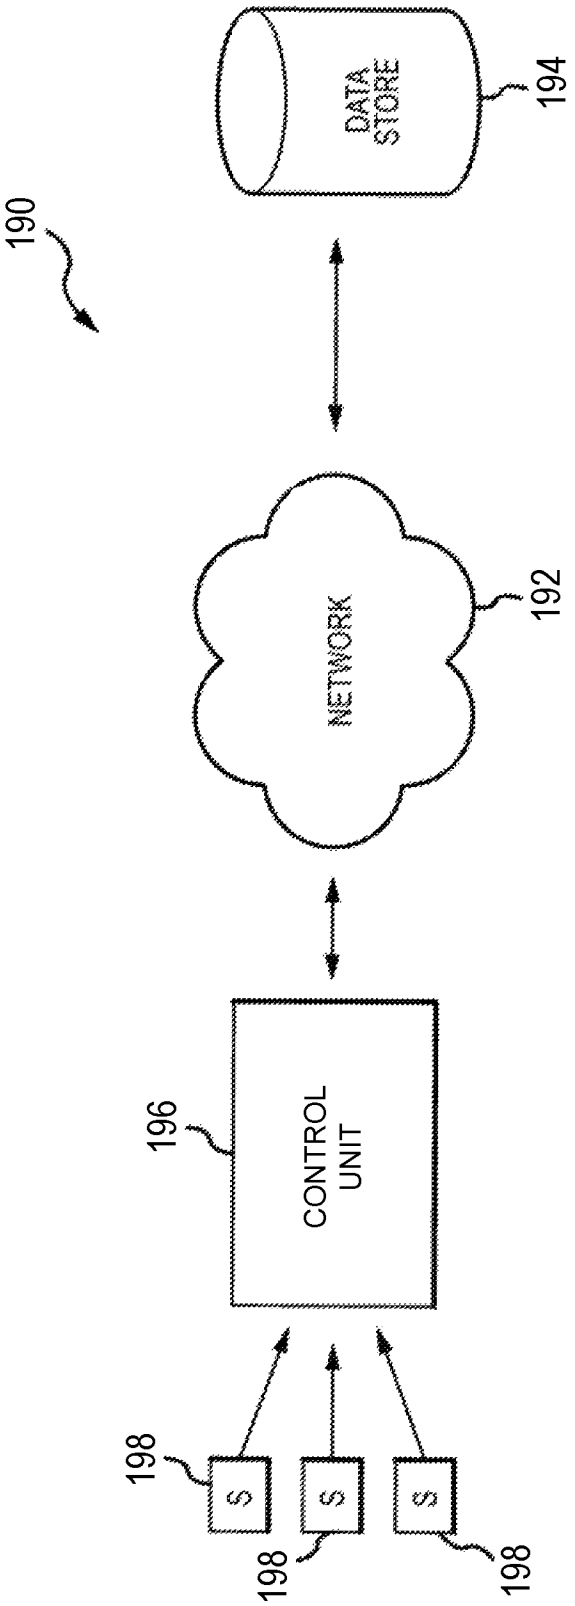

190
DATA STORE
194
NETWORK
192
CONTROL UNIT
196
S
S
S
198
198
198

FIG.8

SMART FRACTURING SYSTEM AND METHOD

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority to and the benefit of U.S. Provisional Application Ser. No. 62/577,056 filed Oct. 25, 2017 titled "AUTOMATED FRACTURING PUMP SYSTEM" the full disclosure of which is hereby incorporated herein by reference in its entirety for all purposes.

BACKGROUND

With advancements in technology over the past few decades, the ability to reach unconventional sources of hydrocarbons has tremendously increased. Horizontal drilling and hydraulic fracturing are two such ways that new developments in technology have led to hydrocarbon production from previously unreachable shale formations. Hydraulic fracturing (fracturing) operations typically require powering numerous components in order to recover oil and gas resources from the ground. For example, hydraulic fracturing usually includes pumps that inject fracturing fluid down the wellbore, blenders that mix proppant into the fluid, cranes, wireline units, and many other components that all must perform different functions to carry out fracturing operations.

Conventionally, these components or systems of components are generally independent systems that are individually controlled by operators. Furthermore, in some cases, operators are also responsible for taking measurements, interpreting raw data, making calculations, and the like. Thus, a large amount of operator intervention to diagnose, interpret, respond to, adjust, and otherwise control operating conditions of the various components.

SUMMARY

Applicant recognized the problems noted above herein and conceived and developed embodiments of systems and methods, according to the present disclosure, for assessing flow rates in hydraulic fracturing systems.

In an embodiment, a hydraulic fracturing system includes a plurality of pumps positioned at a wellsite and configured to pressurize a fracturing fluid, a distribution system fluidly coupled to receive and consolidate fracturing fluid from the plurality of pumps for injection into a wellhead. The hydraulic fracturing system further includes a control system, which includes a plurality of sensing devices configured to measure one or more parameters of the plurality of pumps and the distribution system. The control system also includes one or more processing device configured to receive and analyze the one or more parameters measured by the plurality of sensing devices and generate control instructions based at least in part on the one or more parameters. The control system further includes one or more control device configured to receive the control instructions and control one or more aspects of the plurality of pumps or the distribution system based on the control instructions.

In an embodiment, a hydraulic fracturing method includes providing a fracturing fluid to a plurality of pumps, pumping the fracturing fluid into a distribution system, injecting the fracturing fluid into a well via a wellhead, and measuring one or more parameters of the plurality of pumps, the distribution system, or the wellhead via a plurality of sensing devices instrumented thereon. The method also includes generating automated instructions for one or more control devices based at least in part on the one or more parameters, and controlling one or more functions of the plurality of pumps, the distribution system, or the wellhead based at least in part on the automated instructions.

In an embodiment, a hydraulic fracturing method includes receiving a first data from a first sensing device of a pump system of a hydraulic fracturing system, the first data indicative of a condition of the pump system, and receiving second data from a second sensing device of a blender system of the hydraulic fracturing system, the blender system mixing together materials to form a fracturing fluid and delivering the fracturing fluid to the pump system, and the second data indicative of a condition of the blender system. The method also includes generating automated instructions for one or more control devices of the pump system or the blender system based at least in part on the first and second data, and controlling one or more functions of the plurality of the pump system or the blender system based at least in part on the automated instructions.

BRIEF DESCRIPTION OF DRAWINGS

The foregoing aspects, features, and advantage of embodiments of the present disclosure will further be appreciated when considered with reference to the following description of embodiments and accompanying drawings. In describing embodiments of the disclosure illustrated in the appended drawings, specific terminology will be used for the sake of clarity. However, the disclosure is not intended to be limited to the specific terms used, and it is to be understood that each specific term includes equivalents that operate in a similar manner to accomplish a similar purpose.

FIG. **1** is a schematic plan view of an embodiment of an automated hydraulic fracturing operation, in accordance with embodiments of the present disclosure.

FIG. **2** is a schematic diagram of an embodiment of an automated hydraulic fracturing system, in accordance with embodiments of the present disclosure.

FIG. **3** illustrates an instrumented fracturing pump system, in accordance with embodiments of the present disclosure.

FIG. **4** is a diagram of communicative components of an automated hydraulic fracturing system, in accordance with embodiments of the present disclosure.

FIG. **5** is a diagram of communicative components of an automated hydraulic fracturing system with a central control center, in accordance with embodiments of the present disclosure.

FIG. **6** is a flow chart of an embodiment of an automated hydraulic fracturing method, in accordance with embodiments of the present disclosure.

FIG. **7** is a flow chart of an embodiment of a method of controlling an automated hydraulic fracturing system, in accordance with embodiments of the present disclosure.

FIG. **8** is a block diagram of an embodiment of a control system of an automated hydraulic fracturing system, in accordance with embodiments of the present disclosure.

DETAILED DESCRIPTION

The foregoing aspects, features, and advantages of the present disclosure will be further appreciated when considered with reference to the following description of embodiments and accompanying drawings. In describing the embodiments of the disclosure illustrated in the appended drawings, specific terminology will be used for the sake of

clarity. However, the disclosure is not intended to be limited to the specific terms used, and it is to be understood that each specific term includes equivalents that operate in a similar manner to accomplish a similar purpose.

When introducing elements of various embodiments of the present disclosure, the articles "a", "an", "the", and "said" are intended to mean that there are one or more of the elements. The terms "comprising", "including", and "having" are intended to be inclusive and mean that there may be additional elements other than the listed elements. Any examples of operating parameters and/or environmental conditions are not exclusive of other parameters/conditions of the disclosed embodiments. Additionally, it should be understood that references to "one embodiment", "an embodiment", "certain embodiments", or "other embodiments" of the present disclosure are not intended to be interpreted as excluding the existence of additional embodiments that also incorporate the recited features. Furthermore, reference to terms such as "above", "below", "upper", "lower", "side", "front", "back", or other terms regarding orientation or direction are made with reference to the illustrated embodiments and are not intended to be limiting or exclude other orientations or directions. Additionally, recitations of steps of a method should be understood as being capable of being performed in any order unless specifically stated otherwise. Furthermore, the steps may be performed in series or in parallel unless specifically stated otherwise.

FIG. **1** is a schematic representation of an embodiment of a hydraulic fracturing system **10** positioned at a well site **12**. In the illustrated embodiment, pump trucks **14**, which make up a pumping system **16**, are used to pressurize a fracturing fluid solution for injection into a wellhead **18**. A hydration unit **20** receives fluid from a fluid source **22** via a line, such as a tubular, and also receives additives from an additive source **24**. In an embodiment, the fluid is water and the additives are mixed together and transferred to a blender unit **26** where proppant from a proppant source **28** may be added to form the fracturing fluid solution (e.g., fracturing fluid) which is transferred to the pumping system **16**. The pump trucks **14** may receive the fracturing fluid solution at a first pressure (e.g., 80 psi to 100 psi) and boost the pressure to around 15,000 psi for injection into the wellhead **18**. In certain embodiments, the pump trucks **14** are powered by electric motors.

After being discharged from the pump system **16**, a distribution system **30**, such as a missile, receives the fracturing fluid solution for injection into the wellhead **18**. The distribution system **30** consolidates the fracturing fluid solution from each of the pump trucks **14** (for example, via common manifold for distribution of fluid to the pumps) and includes discharge piping **32** (which may be a series of discharge lines or a single discharge line) coupled to the wellhead **18**. In this manner, pressurized solution for hydraulic fracturing may be injected into the wellhead **18**. In the illustrated embodiment, one or more sensors **34**, **36** are arranged throughout the hydraulic fracturing system **10**. In embodiments, the sensors **34** transmit flow data to a data van **38** for collection and analysis, among other things.

FIG. **2** is a detailed schematic representation of an automated hydraulic fracturing system **40**, that can be used for pressurizing a wellbore **42** to create fractures **44** in a subterranean formation **46** that surrounds the wellbore **42**. Included with the system **40** is a hydration unit **48** that receives fluid from a fluid source **50** via line **52**, and also selectively receives additives from an additive source **54** via line **56**. Additive source **54** can be separate from the hydration unit **48** as a stand-alone unit, or can be included as part of the same unit as the hydration unit **48**. The fluid, which in one example is water, is mixed inside of the hydration unit **48** with the additives. In an embodiment, the fluid and additives are mixed over a period of time, to allow for uniform distribution of the additives within the fluid. In the example of FIG. **2**, the fluid and additive mixture is transferred to a blender unit **58** via line **60**. A proppant source **62** contains proppant, which is delivered to the blender unit **58** as represented by line **64**, where line **64** can be a conveyer. Inside the blender unit **58**, the proppant and fluid/additive mixture are combined to form a fracturing fluid, which is then transferred to a fracturing pump system **66** via line **68**; thus fluid in line **68** includes the discharge of blender unit **58** which is the suction (or boost) for the fracturing pump system **66**.

Blender unit **58** can have an onboard chemical additive system, such as with chemical pumps and augers. Optionally, additive source **54** can provide chemicals to blender unit **58**; or a separate and standalone chemical additive system (not shown) can be provided for delivering chemicals to the blender unit **58**. In an example, the pressure of the fracturing fluid in line **68** ranges from around 80 psi to around 100 psi. The pressure of the fracturing fluid can be increased up to around 15,000 psi by pump system **66**. A motor **69**, which connects to pump system **66** via connection **40**, drives pump system **66** so that it can pressurize the fracturing fluid. In one example, the motor **69** is controlled by a variable frequency drive ("VFD").

After being discharged from pump system **66**, fracturing fluid is pumped into a wellhead assembly **71**. Discharge piping **42** connects discharge of pump system **66** with wellhead assembly **71** and provides a conduit for the fracturing fluid between the pump system **66** and the wellhead assembly **71**. In an alternative, hoses or other connections can be used to provide a conduit for the fracturing fluid between the pump system **66** and the wellhead assembly **71**. Optionally, any type of fluid can be pressurized by the fracturing pump system **66** to form injection fracturing fluid that is then pumped into the wellbore **42** for fracturing the formation **44**, and is not limited to fluids having chemicals or proppant.

An example of a turbine **74** is provided in the example of FIG. **1**. The turbine **74** can be gas powered, receiving a combustible fuel from a fuel source **76** via a feed line **78**. In one example, the combustible fuel is natural gas, and the fuel source **76** can be a container of natural gas or a well (not shown) proximate the turbine **74**. Combustion of the fuel in the turbine **74** in turn powers a generator **80** that produces electricity. Shaft **82** connects generator **80** to turbine **74**. The combination of the turbine **74**, generator **80**, and shaft **82** define a turbine generator **83**. In another example, gearing can also be used to connect the turbine **74** and generator **80**.

An example of a micro-grid **84** is further illustrated in FIG. **2**, and which distributes electricity generated by the turbine generator **83**. Included with the micro-grid **84** is a transformer **86** for stepping down voltage of the electricity generated by the generator **80** to a voltage more compatible for use by electrically powered devices in the hydraulic fracturing system **40**. In another example, the power generated by the turbine generator and the power utilized by the electrically powered devices in the hydraulic fracturing system **10** are of the same voltage, such as 4160 V, so that main power transformers are not needed. In one embodiment, multiple 3500 kVA dry cast coil transformers are utilized. Electricity generated in generator **80** is conveyed to transformer **86** via line **88**. In one example, transformer **86**

steps the voltage down from 13.8 kV to around 600 V. Other step down voltages can include 4,160 V, 480 V, or other voltages.

The output or low voltage side of the transformer **56** connects to a power bus **90**, lines **92**, **94**, **96**, **98**, **100**, and **101** connect to power bus **90** and deliver electricity to electrically powered components of the system **40**. More specifically, line **92** connects fluid source **20** to bus **90**, line **94** connects additive source **24** to bus **90**, line **96** connects hydration unit **18** to bus **90**, line **98** connects proppant source **62** to bus **90**, line **100** connects blender unit **28** to bus **90**, and line **101** connects bus **90** to an optional variable frequency drive ("VFD") **102**. Line **103** connects VFD **102** to motor **69**. In one example, VFD **102** can be used to control operation of motor **69**, and thus also operation of pump **66**.

In an example, additive source **54** contains ten or more chemical pumps for supplementing the existing chemical pumps on the hydration unit **48** and blender unit **58**. Chemicals from the additive source **54** can be delivered via lines **56** to either the hydration unit **48** and/or the blender unit **58**. In one embodiment, the elements of the system **40** are mobile and can be readily transported to a wellsite adjacent the wellbore **42**, such as on trailers or other platforms equipped with wheels or tracks.

In the illustrated embodiment, one or more instrumentation devices **104** such as various types of sensors **106** and controllers **108** are arranged throughout the hydraulic fracturing system **40** and coupled to one or more of the aforementioned components, including any of the wellhead assembly **71**, pump **66**, blender unit **58**, proppant source **62**, hydration unit **48**, additive source **54**, fluid source **50**, generator **80**, turbine **74**, fuel source **76**, any deliveries lines, and various other equipment used in the hydraulic fracturing system **40**, not all of which are explicitly described herein for sake of brevity. The instrumentation **104** may include various sensors, actuators, and/or controllers, which may be different for different components. For example, the instrumentation devices **104** may include hardware features such as, low pressure transducer (low and high frequency), high pressure transducers (low and high frequency), low frequency accelerometers, high frequency accelerometers, temperature sensors, external mounted flow meters such as doppler and sonar sensors, magnetic flow meters, turbine flow meters, proximity probes and sensors, speed sensors, tachometers, capacitive, doppler, inductive, optical, radar, ultrasonic, fiber optic, and hall effect sensors, transmitters and receivers, stroke counters, GPS location monitoring, fuel consumption, load cells, PLCs, and timers. In some embodiments, the instrumentation devices may be installed on the components and dispersed in various locations.

The components may also include communication means that enable all the sensor packages, actuation devices, and equipment components to communicate with each other allowing for real time conditional monitoring. This would allow equipment to adjust rates, pressure, operating conditions such as engine, transmission, power ends RPMs, sand storage compartment gates, valves, and actuators, sand delivery belts and shoots, water storage compartments gates, valves, and actuators, water delivery lines and hoses, individual fracture pump's rates as well as collective system rates, blender hydraulics such as chemical pumps, liquid and dry, fan motors for cooling packages, blender discharge pumps, electric and variable frequency powered chemical pumps and auger screws, suction and discharge manifold meters, valves, and actuators. Equipment can prevent failures, reduce continual damage, and control when it is allowed and not allowed to continue to operate based on live and continuous data readings. Each component may be able to provide troubleshooting codes and alerts that more specifically narrow down the potential causes of issues. This allows technicians to more effectively service equipment, or for troubleshooting or other processes to be initialized automatically. Conditional monitoring will identify changes in system components and will be able to direct, divert, and manage all components so that each is performing its job the most efficiently

In some embodiments, the sensors may transmit data to a data van **38** for collection and analysis, among other things. In some embodiment, the sensors may transmit data to other components, to the central processing unit, or to devices and control units remote from the site. The communications between components, sensors, and control devices may be wired, wireless, or a combination of both. Communication means may include fiber optics, electrical cables, WiFi, Bluetooth, radio frequency, and other cellular, nearfield, Internet-based, or other networked communication means.

The features of the present disclosure may allow for remote monitoring and control from diverse location, not solely the data van **68**. Fracturing control may be integrated in with the sensor and monitoring packages **104** to allow for automated action to be taken when/if needed. Equipment may be able to determine issues or failures on its own, then relay that message with a specified code and alarm. Equipment may also be in control to shut itself down to prevent failures from occurring. Equipment may monitor itself as well as communicate with the system as a whole. This may allow whole system to control equipment and processes so that each and every component is running at its highest efficiency, sand, water, chemical, blenders, pumps, and low and high pressure flow lines. Features of the present disclosure may capture, display, and store data, which may be visible locally and remotely. The data may be accessible live during the data collection and historical data may also be available. Each component to this system can be tested individually with simulation as well as physical function testing.

Operating efficiencies for each individual component and the system **40** may be greatly improved. For example, sand storage and delivery to the blender can be monitored with load cells, sonar sensors and tachometers to determine storage amounts, hopper levels, auger delivery to the tub. Pump efficiencies may be monitored with flow sensors, accelerometers, pressure transducer and tachometers to optimize boost and rate while minimizing harmful conditions such as cavitation or over rating. Failure modes such as wash outs, cutting, valve and/or seat failures, packing issues and supply blockage can be captured and then prevented. Flow lines, both suction supply and discharge can be monitored with flow meters to distribute and optimize flow rates and velocities while preventing over pumping scenarios. Feedback loops of readings from blender to supply manifolds and to pumps can work with each other to optimize pressure and flow. Dropping out of an individual pump may occur preventing further failures, when this occurs the system as a whole may automatically select the best pumps to make up that needed rate. These changes and abilities solve equipment issues and prevent down time as well as provide a means to deliver a consistent job.

In some embodiments, instrumentation devices **104** (any of the above described, among others) can be imbedded, mounted, located in various locations such as in line with flow vessels like hoses, piping, manifolds, placed one pump components such as fluid ends, power ends, transmission, engines, and any component within these individual pieces,

mounted external to piping and flow vessels, mounted on under or above sand and water storage containers. Blender hoppers could be duel equipped with hopper proximity level sensors as well as a load cell to determine amount of sand in the hopper at any given time.

FIG. **3** illustrates an example fracturing pump system **109**, in accordance with example embodiments. As illustrated, the fracturing pump system **109** includes instrumented components, including motors **114**, a transmission, a variable frequency drive (VFD) **115**, pumps **110**, a power end, and a fluid end. The fluid end may further include instrumented components such as packings, valves, seats, stay rod bolts, suction manifold, suction hoses, and discharge flow iron. These components may include embedded or retrofitted hardware devices which are configured to sense various conditions and states associated with the components. Example hardware devices include low pressure transducer (low and high frequency), high pressure transducers (low and high frequency), low frequency accelerometers, high frequency accelerometers, temperature sensors, external mounted flow meters such as doppler and sonar sensors, magnetic flow meters, turbine flow meters, proximity probes and sensors, speed sensors, tachometers, capacitive, doppler, inductive, optical, radar, ultrasonic, fiber optic, and hall effect sensors, transmitters and receivers, stroke counters, gps location monitoring, fuel consumption, PLCs, and timers. The system may be attached to a trailer **112** or a skid.

The fracturing pump components may also include various types of communications devices such as transmitters, receivers, or transceivers, using various communication protocols. This enables components of the fracturing pump components to communicate amongst each other or with a central control unit or remote device so monitor conditions, ensuring that the pumping process is completed effectively and consistently. Communication between the equipment can be both wired and/or wireless, such as through Ethernet, WiFi, Bluetooth, cellular, among other options. Data captured by the hardware can be displayed live locally, stored locally, displayed live remotely, or stored remotely. Such data may be accessed in real-time as well as stored and retrieved at a later time as historical data. In some embodiments, data from one component can be used to determine real time actions to be taken by another component to ensure proper functionality of each component. Specifically, this may allow equipment to adjust rates, pressure, operating conditions such as engine, transmission, power end rotations per minute (RPMs), valves, actuators, individual fracturing pump rates as well as collective system rates, fan motors for cooling packages, electric and variable frequency drive (VFD) powered electric motors for pumps, suction and discharge manifold meters, valves, and actuators. Equipment can prevent failures, reduce continual damage, and control operation based on live and continuous data readings.

Additionally, each component may be able to provide troubleshooting codes and alerts that more specifically provides information regarding the potential causes of issues or current conditions. This information may allow technicians to more effectively service equipment. Conditional monitoring can be used to identify changes in system components and can direct, divert, and manage all components such that each component performs its function with optimal efficiency and/or effectiveness. Failures may be reduced because of the ability to automatically shut down equipment based on continuous real-time readings from various sensors. The components can monitor themselves as well as communicate with the system as a whole.

Present systems and techniques may improve the operating efficiencies for each individual component and the system as a whole. For example, pump efficiencies can be monitored with flow sensors, accelerometers, pressure transducer and tachometers to optimize boost and rate while minimizing harmful conditions such as cavitation or over rating. Failure modes such as wash outs, cutting, valve failures, seat failures, packing issues and supply blockage, can be captured and then prevented. Flow lines, both suction supply and discharge can be monitored with flow meters to distribute and optimize flow rates and velocities while preventing over pumping scenarios. In some embodiments, feedback loops of readings from blender to supply manifolds and to pumps can work with each other to optimize pressure and flow.

In various embodiments, for example, an individual pump may be dropped from operation to prevent further failures. When this occurs, the system as a whole may automatically select the best pump(s) to make up for the dropped pump. Power ends (pumps) may keep track of stroke counts and pumping hours. This data may be accompanied with maintenance logs which may help determine schedules and maintenance procedures. In some embodiments, transmissions may be monitored for each individual gear, duration and load may be logged as well as temperature. If any of these various components were to indicate an alarm that would be detrimental to the equipment, the signal from that sensor may relay the message to shut the entire pump down.

FIG. **4** includes a diagram **120** illustrating a connected automated fracturing system, in accordance with various embodiments. In this example, one or more components **42** of a fracturing system, such as a pump **122**, blender **124**, hydration unit **126**, fluid source **128**, proppant source **130**, additive source **132**, and one or more other components **134**, may include communication devices for transmitting and receiving data with each other over a communication network **136**. In some embodiments, at least some of the components include processors that analyze the data received from one or more of the other components and automatically controls one or more aspects of that component. The communication network **120** may include various types of wired or wireless communication protocols, or a combination of wired and wireless communications. In some embodiments, the connected automated fracturing system further includes one or more of a plurality of components including a manifold, a manifold trailer, a discharge piping, flow lines, conveyance devices, a turbine, a motor, a variable frequency drive, a generator, or a fuel source. Sensors and control devices may be integrated into the one or more of these components, allowing these components to communicate with the rest of the system.

FIG. **5** includes a diagram **140** illustrating a communications network of the automated fracturing system, in accordance with various embodiments. In this example, one or more hydraulic fracturing components **148**, such as, and not limited to, any of those mentioned above, may be communicative with each other via a communication network **150** such as described above with respect to FIG. **4**. The components **148** may also be communicative with a control center **142** over the communication network **150**. The control center **142** may be instrumented into the hydraulic fracturing system or a component. The control center **142** may be onsite, in a data van, or located remotely. The control center **142** may receive data from any of the components **148**, analyze the received data, and generate control instructions for one or more of the components based at least in part on the data. For example, the control center **142** may control

an aspect of one component based on a condition of another component. In some embodiments, the control center **142** may also include a user interface, including a display for displaying data and conditions of the hydraulic fracturing system. The user interface may also enable an operator to input control instructions for the components **144**. The control center **142** may also transmit data to other locations and generate alerts and notification at the control center **150** or to be received at user device remote from the control center **142**.

In some embodiments, a hydraulic fracturing system includes a plurality of pumps positioned at a wellsite and configured to pressurize a fracturing fluid, a distribution system fluidly coupled to receive and consolidate fracturing fluid from the plurality of pumps for injection into a wellhead. The hydraulic fracturing system further includes a control system, which includes a plurality of sensing devices configured to measure one or more parameters of the plurality of pumps and the distribution system. The control system also includes one or more processing device configured to receive and analyze the one or more parameters measured by the plurality of sensing devices and generate control instructions based at least in part on the one or more parameters. The control system further includes one or more control device configured to receive the control instructions and control one or more aspects of the plurality of pumps or the distribution system based on the control instructions.

In some embodiments, the one or more sensing device are installed on the plurality of pumps and the distribution system, and include at least one of flow sensors, accelerometers, pressure transducer, or tachometers. The plurality of pumps or the distribution system may include at least one of a gate, valve, actuator, motor, suction pipe, discharge pipe, engine, transmission, or temperature regulation device, controllable via the one or more control device. In some embodiments, the system further includes a suction line through which fracturing fluid is supplied and a discharge line through which fracturing fluid is discharged, and the plurality of sensing devices includes one or more flow sensors configured to measure flow through the suction line and the discharge line.

The system may also include one or more blenders configured to mix together one or more materials to form the fracturing fluid, wherein the fracturing fluid is provided from the blender to the plurality of pumps via a manifold, wherein the plurality of sensing devices includes one or more pressure or flow sensors for measuring flow and/or pressure conditions at the one or more blenders, the manifold, the plurality of pumps and the distribution system. In some embodiments, the one or more control device is configured to control the one or more blenders, the manifold, the plurality of pumps and the distribution system based on the flow and/or pressure conditions.

FIG. **6** is a flow chart of an embodiment of an automated hydraulic fracturing method **160**, in accordance with example embodiments. It should be noted that the method may include additional steps, fewer steps, and differently ordered steps than illustrated in this example. In this example, a fracturing fluid is provided **162** to a plurality of pumps, and the fracturing fluid is pumped **164** into a distribution system. The fracturing fluid is then injected **166** into a well via a wellhead. One or more parameters of the plurality of pumps, the distribution system, or the wellhead is measured **168** via a plurality of sensing devices instrumented thereon. Automated instructions are then generated for one or more control devices based at least in part on the one or more parameters, and one or more functions of the plurality of pumps, the distribution system, or the wellhead can be controlled based at least in part on the automated instructions.

In some embodiments, the method **160** also includes detecting that a first parameter of the one or more parameters is outside of an acceptable threshold, in which the first parameter is associated with a first pump of the plurality of pumps, and automatically adjusting or turning off the first pump. In some embodiments, the method **160** also includes adjusting one or more of the other pumps in the plurality of pumps to compensate for the first pump. In some embodiments, the method **160** also includes selecting the one or more of the other pumps to adjust based at least in part on the conditions of the other pumps as indicated by one or more of the one or more parameters. In one or more embodiments, the method **160** also includes determining that the one or more parameters are indicative of a potential failure condition; and determining a source of the potential failure condition. In some embodiments, the method **160** also includes generating an alert or notification indicative of the potential failure condition and the source. In some embodiments, the method **160** also includes logging operation data including a number of strokes and pumping hours performed by a pump of the plurality of pumps, and determining a maintenance schedule based at least in part on the operation data.

The hydraulic fracturing system may include other components, such as a turbine, a generator, a hydration unit, a distribution system, a fuel source, or a wellhead, among others. These components may also be instrumented with sensors that measures at least one parameter associated with the turbine, the generator, the hydration unit, the distribution system, the fuel source, or the wellhead. These components may also include controllers, which control at least one aspect of the turbine, the generator, the hydration unit, the distribution system, the fuel source, or the wellhead, based at least in part on the automated instructions. In some embodiments, the hydraulic fracturing system includes a plurality of pumps and a distribution system, in which fracturing fluid is provided from the blender to the plurality of pumps, the fracturing fluid is provided from the plurality of pumps to the distribution system, and the fracturing fluid is injected from the distribution system into the wellbore. The individual pressure at each pump may be automatically adjusted based on the automated instructions. The combined or overall pump rate of the plurality of pumps may also be controlled, and the rate at the distribution system may also be controlled via the automated instructions.

FIG. **7** illustrates a method **180** of controlling an automated fracturing system, in accordance with various embodiments. In this embodiment, a first data is received **182** from a first sensing device of a pump system of a hydraulic fracturing system. The first data may be indicative of a condition of the pump system, such as a flow rate, pump efficiency, temperature, pressure, among others. Second data may be received **184** from a second sensing device of a blender system of the hydraulic fracturing system. The blender system mixes together materials such as proppant and a fluid to form a fracturing fluid and delivers the fracturing fluid to the pump system. The second data may be indicative of a condition of the blender system. Automated instructions for one or more control devices of the pump system or the blender system is generated based at least in part on the first and second data. one or more functions of the plurality of the pump system or the blender system is controlled based at least in part on the automated instructions.

In some embodiments, the pump system includes one or more pumps and a distribution system that receives and consolidates the fracturing fluid from the one or more pumps for injection into a wellhead. In some embodiments, the method **180** also includes controlling one or more functions of the distribution system based on the automated instructions. In some embodiments, the pump system includes a plurality of pumps, and the first data includes measurements of each of the plurality of pumps. The method **180** may also include controlling one or more of the plurality of pumps individually based on the automated instructions. The method **180** may further include detecting that a measurement associated with a first pump of the plurality of pumps is outside of an acceptable threshold, and automatically taking the first pump offline in response to the detection. The method may further include adjusting one or more of the other pumps in the plurality of pumps to compensate for taking the first pump offline.

FIG. **8** is a block diagram of an embodiment of a control system **190** for receiving, analyzing, and storing information from the well site. As described above, sensors **198** are arranged at the well site and may transmit data to a control unit **196** for evaluation and potential adjustments to operating parameters of equipment at the well site. The control unit **196** may be communicatively coupled to a network **192**, such as the Internet, that can access a data store **194**, such as a cloud storage server. Accordingly, in embodiments, data from the sensors **198** is transmitted to the control unit **196** (which may be located on a component, within a data van, or remotely) and is stored locally. However, the control unit **196** may upload the data from the sensors **198** along with other data, to the data store **194** via the network **192**. Accordingly, data from previous pumping operations or different sensors may be utilized to adjust various aspects of the hydraulic fracturing operation as needed. For example, the flow data from the sensor **198** may be coupled with information from the sensors **198** (such as the vibration sensor, gear sensors, RPM sensors, pressure sensors, etc.) to provide diagnostics with information from the data store **194**. For example, previous data may be used as training data for a machine learning model for predicting various control parameters of a present operation.

In embodiments, the data store **194** includes information of the equipment used at the well site. It should be appreciated that, in various embodiments, information from the data store **194** may be stored in local storage, for example in storage within a data can, and as a result, communication over the network **192** to the remote data store **194** may not be used. For example, in various embodiments, drilling operations may be conducted at remote locations where Internet data transmission may be slow or unreliable. As a result, information from the data store **194** may be downloaded and stored locally at the data van before the operation, thereby providing access to the information for evaluation of operation conditions at the well site.

The foregoing disclosure and description of the disclosed embodiments is illustrative and explanatory of the embodiments of the invention. Various changes in the details of the illustrated embodiments can be made within the scope of the appended claims without departing from the true spirit of the disclosure. The embodiments of the present disclosure should only be limited by the following claims and their legal equivalents.

The invention claimed is:

1. A hydraulic fracturing system, comprising:

a plurality of pumps positioned at a wellsite and configured to pressurize a fracturing fluid;

a distribution system fluidly coupled to receive and consolidate fracturing fluid from the plurality of pumps for injection into a wellhead; and

a control system comprising:

a plurality of sensing devices configured to measure one or more parameters of the plurality of pumps and the distribution system;

one or more processing devices configured to receive a first parameter from a first device of the plurality of pumps, the distribution system, or the wellhead, and transmit the first parameter to a second device of the plurality of the plurality of pumps, the distribution system, or the wellhead, and detect that the first parameter is outside of an acceptable threshold; and generate automated control instructions at the second device based at least in part on the first parameter; and

one or more control devices configured to receive the automated control instructions and automatically adjust one or more aspects of the second device based on the control instructions.

2. The system of claim **1**, wherein the plurality of sensing devices are installed on the plurality of pumps and the distribution system, and selected from a group including flow sensors, accelerometers, pressure transducer, and tachometers.

3. The system of claim **1**, wherein the plurality of pumps or the distribution system includes at least one device selected from a group include a gate, valve, actuator, motor, suction pipe, discharge pipe, engine, transmission, and temperature regulation device, controllable via the one or more control devices.

4. The system of claim **1**, further comprising:

a suction line through which fracturing fluid is supplied; and

a discharge line through which fracturing fluid is discharged, wherein the plurality of sensing devices includes one or more flow sensors configured to measure flow through the suction line and the discharge line.

5. The system of claim **1**, further comprising:

one or more blenders configured to mix together one or more materials to form the fracturing fluid, wherein the fracturing fluid is provided from the blender to the plurality of pumps via a manifold, wherein the plurality of sensing devices includes one or more pressure or flow sensors for measuring flow conditions at the one or more blenders, the manifold, the plurality of pumps, or the distribution system.

6. The system of claim **5**, wherein the one or more control device is configured to control the one or more blenders, the manifold, the plurality of pumps and the distribution system based on the flow and/or pressure conditions.

7. A hydraulic fracturing method, comprising:

providing a fracturing fluid to a plurality of pumps;

pumping the fracturing fluid into a distribution system;

injecting the fracturing fluid into a wellhead;

measuring one or more parameters of the plurality of pumps, the distribution system, or the wellhead via a plurality of sensing devices instrumented thereon;

detecting that a first parameter of the one or more parameters is outside of an acceptable threshold;

generating automated instructions for one or more control devices based at least in part on the one or more parameters;

automatically adjusting one or more functions of the plurality of pumps, the distribution system, or the wellhead based at least in part on the automated instructions;

transmitting the first parameter from a first device of the plurality of pumps, the distribution system, or the wellhead to a second device of the plurality of the plurality of pumps, the distribution system, or the wellhead;

generating the automated instructions at the second device based at least in part on the first parameter; and

automatically adjusting one or more functions of the second device based on the automated instructions.

8. The method of claim **7**, further comprising:

detecting that a first pump of the plurality of pumps is underperforming; and

adjusting one or more of the pumps in the plurality of pumps to compensate for the first pump.

9. The method of claim **8**, further comprising:

selecting the one or more of the other pumps to adjust based at least in part on the conditions of the other pumps as indicated by one or more of the one or more parameters.

10. The method of claim **7**, further comprising:

determining that the one or more parameters are indicative of a potential failure condition; and

determining a source of the potential failure condition.

11. The method of claim **10**, further comprising:

generating an alert or notification indicative of the potential failure condition and the source.

12. The method of claim **7**, further comprising:

logging operation data including a number of strokes and pumping hours performed by a pump of the plurality of pumps; and

determining a maintenance schedule based at least in part on the operation data.

13. A hydraulic fracturing method, comprising:

performing one or more hydraulic fracturing operations at a hydraulic fracturing system, the hydraulic fracturing system comprising a plurality of pumps, a distribution system, and a wellhead;

measuring one or more operational parameters of the plurality of pumps, the distribution system, or the wellhead;

transmitting a first parameter of the one or more operational parameters from a first device of the plurality of pumps, the distribution system, or the wellhead to a second device of the plurality of the plurality of pumps, the distribution system, or the wellhead;

detecting that the first parameter is outside of an acceptable threshold;

generating automated instructions at the second device based at least in part on the first parameter; and

automatically adjusting one or more functions of the second device based on the automated instructions.

14. The method of claim **13**, wherein

the distribution system receives and consolidates the fracturing fluid from the plurality of pumps for injection into a wellhead.

15. The method of claim **14**, further comprising:

controlling one or more functions of the distribution system based on the automated instructions.

16. The method of claim **13**, wherein the first parameter includes measurements of one or more of the plurality of pumps.

17. The method of claim **16**, further comprising:

controlling one or more of the plurality of pumps individually based on the automated instructions.

18. The method of claim **17**, further comprising:

detecting that a measurement associated with a first pump of the plurality of pumps is outside of an acceptable threshold; and

automatically taking the first pump offline in response to the detection.

19. The method of claim **18**, further comprising:

adjusting one or more of the other pumps in the plurality of pumps to compensate for taking the first pump offline.

* * * * *