

(12) **United States Patent**
Oehring et al.

(10) **Patent No.:** **US 10,598,258 B2**
(45) **Date of Patent:** **Mar. 24, 2020**

(54) **MULTI-PLUNGER PUMPS AND ASSOCIATED DRIVE SYSTEMS**

(56) **References Cited**

(71) Applicant: **U.S. Well Services, Inc.**, Houston, TX (US)

U.S. PATENT DOCUMENTS
1,656,861 A 1/1928 Leonard
1,671,436 A 5/1928 Melott
(Continued)

(72) Inventors: **Jared Oehring**, Houston, TX (US);
Lon Robinson, Houston, TX (US);
Brandon N. Hinderliter, Houston, TX (US);
Alexander James Christinzio, Houston, TX (US)

FOREIGN PATENT DOCUMENTS

AU 2007340913 7/2008
CA 2406801 11/2001
(Continued)

(73) Assignee: **U.S. Well Services, LLC**, Houston, TX (US)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

Non-Final Office Action dated Feb. 12, 2019 in related U.S. Appl. No. 16/170,695.

(Continued)

(21) Appl. No.: **16/210,807**

Primary Examiner — D. Andrews

(22) Filed: **Dec. 5, 2018**

(74) *Attorney, Agent, or Firm* — Hogan Lovells US LLP

(65) **Prior Publication Data**

US 2019/0249754 A1 Aug. 15, 2019

Related U.S. Application Data

(60) Provisional application No. 62/594,912, filed on Dec. 5, 2017.

(51) **Int. Cl.**
E21B 43/20 (2006.01)
F16H 3/52 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **F16H 3/52** (2013.01); **E21B 37/00** (2013.01); **E21B 43/20** (2013.01); **E21B 43/26** (2013.01);
(Continued)


(58) **Field of Classification Search**

None
See application file for complete search history.

(57) **ABSTRACT**

A hydraulic fracturing system for fracturing a subterranean formation is described according to various embodiments. In an embodiment, the system can include a multi-plunger hydraulic fracturing pump fluidly connected to a well associated with the subterranean formation, the multi-plunger pump configured to pump fluid into a wellbore associated with the well at a high pressure so that the fluid passes from the wellbore into the subterranean formation and fractures the subterranean formation. In an embodiment, a plurality of motors can be positioned to power the multi-plunger pump, and a planetary gear train can have a plurality of pinion gears in rotational contact with each of the plurality of motors. In an embodiment, a gear ratio of the planetary gear train and a speed at which the plurality of motors operates can be selected so as to limit a maximum pump speed associated with the multi-plunger pump.

20 Claims, 10 Drawing Sheets

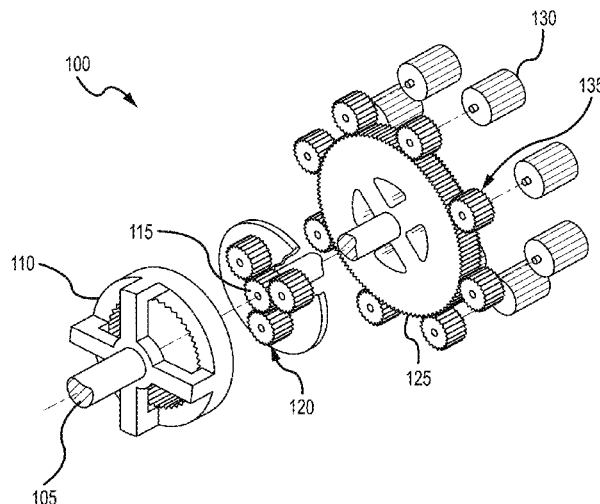

(51)	Int. Cl.		6,208,098 B1	3/2001	Kume
	F04B 17/03	(2006.01)	6,254,462 B1	7/2001	Kelton
	F04B 23/04	(2006.01)	6,271,637 B1	8/2001	Kushion
	F04B 15/02	(2006.01)	6,273,193 B1	8/2001	Hermann
	F04B 47/02	(2006.01)	6,315,523 B1	11/2001	Mills
	E21B 43/26	(2006.01)	6,477,852 B2	11/2002	Dodo
	E21B 37/00	(2006.01)	6,484,490 B1	11/2002	Olsen
	F04B 49/20	(2006.01)	6,491,098 B1	12/2002	Dallas
	F16H 39/02	(2006.01)	6,529,135 B1	3/2003	Bowers et al.
(52)	U.S. Cl.		6,776,227 B2	8/2004	Beida
	CPC		6,802,690 B2	10/2004	Plan
	F04B 15/02 (2013.01); F04B 17/03		6,808,303 B2	10/2004	Fisher
	(2013.01); F04B 23/04 (2013.01); F04B 47/02		6,931,310 B2	8/2005	Shimizu et al.
	(2013.01); F04B 49/20 (2013.01); F16H		6,936,947 B1	8/2005	Leijon
	39/02 (2013.01); F16H 2200/2007 (2013.01)		7,082,993 B2	8/2006	Ayoub
(56)	References Cited		7,104,233 B2	9/2006	Ryzczek et al.
	U.S. PATENT DOCUMENTS		7,170,262 B2	1/2007	Pettigrew
	2,004,077 A	6/1935	7,173,399 B2	2/2007	Sihler
	2,183,364 A	12/1939	7,308,933 B1	12/2007	Mayfield
	2,220,622 A	11/1940	7,312,593 B1	12/2007	Streicher et al.
	2,248,051 A	7/1941	7,336,514 B2	2/2008	Amarillas
	2,407,796 A	9/1946	7,445,041 B2	11/2008	O'Brien
	2,416,848 A	3/1947	7,494,263 B2	2/2009	Dykstra et al.
	2,753,940 A	7/1956	7,500,642 B2	3/2009	Cunningham
	3,061,039 A	10/1962	7,525,264 B2	4/2009	Dodge
	3,066,503 A	12/1962	7,563,076 B2	7/2009	Brunet
	3,302,069 A	1/1967	7,581,379 B2	9/2009	Yoshida
	3,334,495 A	8/1967	7,675,189 B2	3/2010	Grenier
	3,722,595 A	3/1973	7,683,499 B2	3/2010	Saucier
	3,764,233 A	10/1973	7,717,193 B2	5/2010	Egilsson et al.
	3,773,140 A	11/1973	7,755,310 B2	7/2010	West et al.
	3,837,179 A	9/1974	7,807,048 B2	10/2010	Collette
	3,849,662 A	11/1974	7,835,140 B2	11/2010	Mori
	3,881,551 A	5/1975	7,845,413 B2	12/2010	Shampine et al.
	4,037,431 A	7/1977	7,926,562 B2	4/2011	Poitzsch
	4,100,822 A	7/1978	7,977,824 B2	7/2011	Halen et al.
	4,151,575 A	4/1979	7,984,757 B1	7/2011	Keast
	4,226,299 A	10/1980	8,037,936 B2	10/2011	Neuroth
	4,265,266 A	5/1981	8,054,084 B2	11/2011	Schulz et al.
	4,432,064 A	2/1984	8,083,504 B2	12/2011	Williams
	4,442,665 A	4/1984	8,096,354 B2	1/2012	Poitzsch
	4,456,092 A	6/1984	8,096,891 B2	1/2012	Lochtefeld
	4,506,982 A	3/1985	8,139,383 B2	3/2012	Efraimsson
	4,512,387 A	4/1985	8,146,665 B2	4/2012	Neal
	4,529,887 A	7/1985	8,154,419 B2	4/2012	Daussin et al.
	4,538,916 A	9/1985	8,232,892 B2	7/2012	Overholt et al.
	4,676,063 A	6/1987	8,261,528 B2	9/2012	Chillar
	4,759,674 A	7/1988	8,272,439 B2	9/2012	Strickland
	4,793,386 A	12/1988	8,310,272 B2	11/2012	Quarto
	4,845,981 A	7/1989	8,354,817 B2	1/2013	Yeh et al.
	4,922,463 A	5/1990	8,474,521 B2	7/2013	Kajaria
	5,006,044 A	4/1991	8,534,235 B2	9/2013	Chandler
	5,025,861 A	6/1991	8,573,303 B2	11/2013	Kerfoot
	5,050,673 A	9/1991	8,596,056 B2	12/2013	Woodmansee
	5,130,628 A	7/1992	8,616,005 B1	12/2013	Cousino
	5,131,472 A	7/1992	8,616,274 B2	12/2013	Belcher et al.
	5,172,009 A	12/1992	8,646,521 B2	2/2014	Bowen
	5,189,388 A	2/1993	8,692,408 B2	4/2014	Zhang et al.
	5,366,324 A	11/1994	8,727,068 B2	5/2014	Bruin
	5,422,550 A	6/1995	8,760,657 B2	6/2014	Pope et al.
	5,548,093 A	8/1996	8,774,972 B2	7/2014	Rusnak et al.
	5,590,976 A	1/1997	8,789,601 B2	7/2014	Broussard
	5,655,361 A	8/1997	8,800,652 B2	8/2014	Bartko
	5,736,838 A	4/1998	8,807,960 B2	8/2014	Stephenson
	5,755,096 A	5/1998	8,838,341 B2	9/2014	Kumano
	5,790,972 A	8/1998	8,851,860 B1	10/2014	Mail
	5,865,247 A	2/1999	8,857,506 B2	10/2014	Stone, Jr.
	5,879,137 A	3/1999	8,899,940 B2	12/2014	Laugemors
	5,894,888 A	4/1999	8,905,056 B2	12/2014	Kendrick
	5,907,970 A	6/1999	8,905,138 B2	12/2014	Lundstedt et al.
	6,138,764 A	10/2000	8,997,904 B2	4/2015	Cryer
	6,142,878 A	11/2000	9,018,881 B2	4/2015	Mao et al.
	6,164,910 A	12/2000	9,051,822 B2	6/2015	Ayan
	6,202,702 B1	3/2001	9,067,182 B2	6/2015	Nichols
			9,103,193 B2	8/2015	Coll
			9,119,326 B2	8/2015	McDonnell
			9,121,257 B2	9/2015	Coli et al.
			9,140,110 B2	9/2015	Coli et al.
			9,160,168 B2	10/2015	Chapel

(56)

References Cited

U.S. PATENT DOCUMENTS

9,175,554 B1	11/2015	Watson	2009/0078410 A1	3/2009	Krenek et al.
9,206,684 B2	12/2015	Parra	2009/0090504 A1	4/2009	Weightman
9,322,239 B2	4/2016	Angeles Boza et al.	2009/0093317 A1	4/2009	Kajiwarra et al.
9,366,114 B2	6/2016	Coli et al.	2009/0095482 A1	4/2009	Surjaatmadja
9,410,410 B2	8/2016	Broussard et al.	2009/0145611 A1	6/2009	Pallini, Jr.
9,450,385 B2	9/2016	Kristensen	2009/0153354 A1	6/2009	Daussin et al.
9,458,687 B2	10/2016	Hallundbaek	2009/0188181 A1	7/2009	Forbis
9,475,020 B2	10/2016	Coli et al.	2009/0200035 A1	8/2009	Bjerkreim et al.
9,475,021 B2	10/2016	Coli et al.	2009/0260826 A1	10/2009	Sherwood
9,534,473 B2	1/2017	Morris et al.	2009/0308602 A1	12/2009	Bruins et al.
9,562,420 B2	2/2017	Morris et al.	2010/0000508 A1	1/2010	Chandler
9,587,649 B2	3/2017	Oehring	2010/0019574 A1	1/2010	Baldassarre et al.
9,611,728 B2	4/2017	Oehring	2010/0038907 A1	2/2010	Hunt
9,650,871 B2	5/2017	Oehring et al.	2010/0045109 A1	2/2010	Arnold
9,650,879 B2	5/2017	Broussard et al.	2010/0051272 A1	3/2010	Loree et al.
9,728,354 B2	8/2017	Skolozdra	2010/0101785 A1	4/2010	Khvoshchev
9,738,461 B2	8/2017	DeGaray	2010/0132949 A1	6/2010	DeFosse et al.
9,745,840 B2	8/2017	Oehring et al.	2010/0146981 A1	6/2010	Motakef
9,840,901 B2	12/2017	Oehring et al.	2010/0172202 A1	7/2010	Borgstadt
9,863,228 B2	1/2018	Shampine et al.	2010/0200224 A1	8/2010	Nguete
9,893,500 B2	2/2018	Oehring	2010/0250139 A1	9/2010	Hobbs et al.
9,915,128 B2	3/2018	Hunter	2010/0293973 A1	11/2010	Erickson
9,932,799 B2	4/2018	Symchuk	2010/0303655 A1	12/2010	Seckic
9,963,961 B2	5/2018	Hardin	2010/0322802 A1	12/2010	Kugelev
9,970,278 B2	5/2018	Broussard	2011/0005757 A1	1/2011	Hebert
9,976,351 B2	5/2018	Randall	2011/0017468 A1	1/2011	Birch et al.
9,995,218 B2	6/2018	Oehring	2011/0061855 A1	3/2011	Case et al.
10,008,880 B2	6/2018	Vicknair	2011/0085924 A1	4/2011	Shampine
10,020,711 B2	7/2018	Oehring	2011/0166046 A1	7/2011	Weaver
10,036,238 B2	7/2018	Oehring	2011/0247878 A1	10/2011	Rasheed
10,107,086 B2	10/2018	Oehring	2011/0272158 A1	11/2011	Neal
10,119,381 B2	11/2018	Oehring	2012/0018016 A1	1/2012	Gibson
10,196,878 B2	2/2019	Hunter	2012/0049625 A1	3/2012	Hopwood
10,227,854 B2	3/2019	Glass	2012/0085541 A1	4/2012	Love et al.
10,232,332 B2	3/2019	Oehring	2012/0127635 A1	5/2012	Grindeland
10,246,984 B2	4/2019	Payne	2012/0205301 A1	8/2012	McGuire et al.
10,254,732 B2	4/2019	Oehring	2012/0205400 A1	8/2012	DeGaray et al.
10,260,327 B2	4/2019	Kajaria	2012/0222865 A1	9/2012	Larson
10,280,724 B2	5/2019	Hinderliter	2012/0232728 A1	9/2012	Karimi et al.
10,287,873 B2	5/2019	Filas	2012/0247783 A1	10/2012	Berner, Jr.
10,309,205 B2	6/2019	Randall	2012/0255734 A1	10/2012	Coli et al.
10,371,012 B2	8/2019	Davis	2013/0009469 A1	1/2013	Gillett
10,378,326 B2	8/2019	Morris	2013/0025706 A1	1/2013	DeGaray et al.
10,393,108 B2	8/2019	Chong	2013/0175038 A1	7/2013	Conrad
10,407,990 B2	9/2019	Oehring	2013/0175039 A1	7/2013	Guidry
10,436,026 B2	10/2019	Ounadjela	2013/0199617 A1	8/2013	DeGaray et al.
2002/0169523 A1	11/2002	Ross et al.	2013/0233542 A1	9/2013	Shampine
2003/0056514 A1	3/2003	Lohn	2013/0306322 A1	11/2013	Sanborn et al.
2003/0138327 A1	7/2003	Jones et al.	2013/0341029 A1	12/2013	Roberts et al.
2004/0040746 A1	3/2004	Niedermayr	2013/0343858 A1	12/2013	Flusche
2004/0102109 A1	5/2004	Cratty et al.	2014/0000899 A1	1/2014	Nevison
2004/0167738 A1	8/2004	Miller	2014/0010671 A1	1/2014	Cryer et al.
2005/0061548 A1	3/2005	Hooper	2014/0054965 A1	2/2014	Jain
2005/0116541 A1	6/2005	Seiver	2014/0060658 A1	3/2014	Hains
2005/0274508 A1	12/2005	Folk	2014/0095114 A1	4/2014	Thomeer
2006/0052903 A1	3/2006	Bassett	2014/0096974 A1	4/2014	Coli
2006/0260331 A1	11/2006	Andreychuk	2014/0124162 A1	5/2014	Leavitt
2007/0131410 A1	6/2007	Hill	2014/0138079 A1	5/2014	Broussard et al.
2007/0187163 A1	8/2007	Cone	2014/0174717 A1	6/2014	Broussard et al.
2007/0201305 A1	8/2007	Heilman et al.	2014/0219824 A1	8/2014	Burnette
2007/0226089 A1	9/2007	DeGaray et al.	2014/0246211 A1	9/2014	Guidry et al.
2007/0277982 A1	12/2007	Shampine	2014/0251623 A1	9/2014	Lestz et al.
2007/0278140 A1	12/2007	Mallet et al.	2014/0255214 A1	9/2014	Burnette
2008/0017369 A1	1/2008	Sarada	2014/0277772 A1	9/2014	Lopez
2008/0041596 A1	2/2008	Blount	2014/0290768 A1	10/2014	Randle
2008/0112802 A1	5/2008	Orlando	2014/0379300 A1	12/2014	Devine et al.
2008/0137266 A1	6/2008	Jensen	2015/0027712 A1	1/2015	Vicknair
2008/0208478 A1	8/2008	Ella et al.	2015/0053426 A1	2/2015	Smith
2008/0217024 A1	9/2008	Moore	2015/0068724 A1	3/2015	Coli et al.
2008/0236818 A1	10/2008	Dykstra	2015/0068754 A1	3/2015	Coli et al.
2008/0264625 A1	10/2008	Ochoa	2015/0075778 A1	3/2015	Walters
2008/0264640 A1	10/2008	Eslinger	2015/0083426 A1	3/2015	Lesko
2008/0264649 A1	10/2008	Crawford	2015/0097504 A1	4/2015	Lamascus
2009/0045782 A1	2/2009	Datta	2015/0114652 A1	4/2015	Lestz
2009/0065299 A1	3/2009	Vito	2015/0136043 A1	5/2015	Shaaban
			2015/0144336 A1	5/2015	Hardin et al.
			2015/0159911 A1	6/2015	Holt
			2015/0175013 A1	6/2015	Cryer et al.
			2015/0176386 A1	6/2015	Castillo et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2015/0211512	A1	7/2015	Wiegman
2015/0211524	A1	7/2015	Broussard
2015/0217672	A1	8/2015	Shampine
2015/0225113	A1	8/2015	Lungu
2015/0252661	A1	9/2015	Glass
2015/0300145	A1	10/2015	Coli et al.
2015/0314225	A1	11/2015	Coli et al.
2015/0330172	A1	11/2015	Allmaras
2015/0354322	A1	12/2015	Vicknair
2016/0032703	A1	2/2016	Broussard et al.
2016/0102537	A1	4/2016	Lopez
2016/0105022	A1	4/2016	Oehring
2016/0208592	A1	4/2016	Oehring
2016/0160889	A1	6/2016	Hoffman et al.
2016/0177675	A1	6/2016	Morris et al.
2016/0177678	A1	6/2016	Morris
2016/0186531	A1	6/2016	Harkless et al.
2016/0208593	A1	7/2016	Coli et al.
2016/0208594	A1	7/2016	Coli et al.
2016/0208595	A1	7/2016	Tang
2016/0221220	A1	8/2016	Paige
2016/0230524	A1	8/2016	Dumoit
2016/0230525	A1	8/2016	Lestz et al.
2016/0258267	A1	9/2016	Payne et al.
2016/0265457	A1	9/2016	Stephenson
2016/0273328	A1	9/2016	Oehring
2016/0281484	A1	9/2016	Lestz
2016/0290114	A1	10/2016	Oehring
2016/0290563	A1	10/2016	Diggins
2016/0312108	A1	10/2016	Lestz et al.
2016/0319650	A1	11/2016	Oehring
2016/0326854	A1	11/2016	Broussard
2016/0326855	A1	11/2016	Coli et al.
2016/0341281	A1	11/2016	Brunvold et al.
2016/0348479	A1	12/2016	Oehring
2016/0349728	A1	12/2016	Oehring
2016/0369609	A1	12/2016	Morris et al.
2017/0016433	A1	1/2017	Chong
2017/0021318	A1	1/2017	McIver et al.
2017/0022788	A1	1/2017	Oehring et al.
2017/0022807	A1	1/2017	Dursun
2017/0028368	A1	2/2017	Oehring et al.
2017/0030177	A1	2/2017	Oehring et al.
2017/0030178	A1	2/2017	Oehring et al.
2017/0036178	A1	2/2017	Coli et al.
2017/0036872	A1	2/2017	Wallace
2017/0037717	A1	2/2017	Oehring
2017/0037718	A1	2/2017	Coli et al.
2017/0051732	A1	2/2017	Hernandez et al.
2017/0096885	A1	4/2017	Oehring
2017/0104389	A1	4/2017	Morris et al.
2017/0114625	A1	4/2017	Norris
2017/0145918	A1	5/2017	Oehring
2017/0146189	A1	5/2017	Herman
2017/0159570	A1	6/2017	Bickert
2017/0218727	A1	8/2017	Oehring
2017/0218843	A1	8/2017	Oehring
2017/0222409	A1	8/2017	Oehring
2017/0226839	A1	8/2017	Broussard
2017/0226842	A1	8/2017	Omont et al.
2017/0234250	A1	8/2017	Janik
2017/0241221	A1	8/2017	Seshadri
2017/0259227	A1	9/2017	Morris et al.
2017/0292513	A1	10/2017	Haddad
2017/0313499	A1	11/2017	Hughes et al.
2017/0314380	A1	11/2017	Oehring
2017/0328179	A1	11/2017	Dykstra
2017/0369258	A1	12/2017	DeGaray et al.
2018/0028992	A1	2/2018	Stegemoeller
2018/0038216	A1	2/2018	Zhang
2018/0156210	A1	6/2018	Oehring
2018/0183219	A1	6/2018	Oehring
2018/0216455	A1	8/2018	Andreychuk
2018/0245428	A1	8/2018	Richards
2018/0258746	A1	9/2018	Broussard

2018/0274446	A1	9/2018	Oehring
2018/0320483	A1	11/2018	Zhang
2018/0363437	A1	12/2018	Coli
2019/0003329	A1	1/2019	Morris
2019/0010793	A1	1/2019	Hinderliter
2019/0063309	A1	2/2019	Davis
2019/0100989	A1	4/2019	Stewart
2019/0112910	A1	4/2019	Oehring
2019/0120024	A1	4/2019	Oehring
2019/0128080	A1	5/2019	Ross
2019/0162061	A1	5/2019	Stephenson
2019/0169971	A1	6/2019	Oehring
2019/0178057	A1	6/2019	Hunter
2019/0178235	A1	6/2019	Coskrey
2019/0203567	A1	7/2019	Ross
2019/0203572	A1	7/2019	Morris
2019/0211661	A1	7/2019	Reckels
2019/0226317	A1	7/2019	Payne
2019/0245348	A1	8/2019	Hinderliter
2019/0292866	A1	9/2019	Ross
2019/0292891	A1	9/2019	Kajaria
2019/0316447	A1	10/2019	Oehring

FOREIGN PATENT DOCUMENTS

CA	2707269	12/2010
CA	2482943	5/2011
CA	3050131	11/2011
CA	2955706	10/2012
CA	2966672	10/2012
CA	3000322	4/2013
CA	2787814	2/2014
CA	2833711	5/2014
CA	2978706	9/2016
CA	2944980	2/2017
CA	3006422	6/2017
CA	3018485	8/2017
CA	2964593	10/2017
CA	2849825	7/2018
CA	2919649	2/2019
CA	2919666	7/2019
CA	2797081	9/2019
CA	2945579	10/2019
CN	201687513	12/2010
CN	101977016	2/2011
CN	202023547	11/2011
CN	102602322	7/2012
JP	2004264589	9/2004
WO	2016/144939	9/2016
WO	2016/160458	10/2016

OTHER PUBLICATIONS

International Search Report and Written Opinion dated Feb. 15, 2019 in related PCT Application No. PCT/US18/63977.

Non-Final Office Action dated Feb. 25, 2019 in related U.S. Appl. No. 16/210,749.

International Search Report and Written Opinion dated Mar. 5, 2019 in related PCT Application No. PCT/US18/63970.

Non-Final Office Action dated Mar. 6, 2019 in related U.S. Appl. No. 15/183,387.

Office Action dated Mar. 1, 2019 in related Canadian Patent Application No. 2,943,275.

Office Action dated Jan. 30, 2019 in related Canadian Patent Application No. 2,936,997.

Office Action dated Dec. 12, 2018 in related U.S. Appl. No. 16/160,708.

International Search Report and Written Opinion dated Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54542.

International Search Report and Written Opinion dated Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54548.

International Search Report and Written Opinion dated Dec. 31, 2018 in related PCT Patent Application No. PCT/US18/55913.

International Search Report and Written Opinion dated Jan. 4, 2019 in related PCT Patent Application No. PCT/US18/57539.

International Search Report and Written Opinion dated Apr. 10, 2019 in corresponding PCT Application No. PCT/US2019/016635.

(56)

References Cited**OTHER PUBLICATIONS**

Notice of Allowance dated Apr. 23, 2019 in corresponding U.S. Appl. No. 15/635,028.

Schlumberger, "Jet Manual 23, Fracturing Pump Units, SPF/SPS-343, Version 1.0," Jan. 31, 2007, 68 pages.

Stewart & Stevenson, "Stimulation Systems," 2007, 20 pages.

Luis Gamboa, "Variable Frequency Drives in Oil and Gas Pumping Systems," Dec. 17, 2011, 5 pages.

"Griswold Model 811 Pumps: Installation, Operation and Maintenance Manual, ANSI Process Pump," 2010, 60 pages.

UK Power Networks—Transformers to Supply Heat to Tate Modern—from Press Releases May 16, 2013.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/293,681 dated Feb. 16, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/294,349 dated Mar. 14, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Jan. 20, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,443 dated Feb. 7, 2017.

Notice of Allowance issued in corresponding U.S. Appl. No. 15/217,040 dated Mar. 28, 2017.

Notice of Allowance issued in corresponding U.S. Appl. No. 14/622,532 dated Mar. 27, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/291,842 dated Jan. 6, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Dec. 7, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated May 17, 2016.

Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Dec. 21, 2015.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Aug. 5, 2015.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Sep. 12, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/217,040 dated Nov. 29, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/235,788 dated Dec. 14, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated May 15, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/486,970 dated Jun. 22, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,656 dated Jun. 23, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,694 dated Jun. 26, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 15/294,349 dated Jul. 6, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/884,363 dated Sep. 5, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Sep. 6, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/881,535 dated Oct. 6, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/145,414 dated Nov. 29, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/644,487 dated Nov. 13, 2017.

Canadian Office Action dated Mar. 2, 2018 in related Canadian Patent Application No. 2,833,711.

Office Action dated Apr. 10, 2018 in related U.S. Appl. No. 15/294,349.

Office Action dated Apr. 2, 2018 in related U.S. Appl. No. 15/183,387.

Office Action dated May 29, 2018 in related U.S. Appl. No. 15/235,716.

Canadian Office Action dated Apr. 18, 2018 in related Canadian Patent Application No. 2,928,711.

Canadian Office Action dated Jun. 22, 2018 in related Canadian Patent Application No. 2,886,697.

Office Action dated Jul. 25, 2018 in related U.S. Appl. No. 15/644,487.

Office Action dated Oct. 4, 2018 in related U.S. Appl. No. 15/217,081.

International Search Report and Written Opinion dated Sep. 19, 2018 in related PCT Patent Application No. PCT/US2018/040683.

Canadian Office Action dated Sep. 28, 2018 in related Canadian Patent Application No. 2,945,281.

International Search Report and Written Opinion dated Jul. 9, 2019 in corresponding PCT Application No. PCT/US2019/027584.

Office Action dated Jun. 11, 2019 in corresponding U.S. Appl. No. 16/210,749.

Office Action dated May 10, 2019 in corresponding U.S. Appl. No. 16/268,030.

Canadian Office Action dated May 30, 2019 in corresponding CA Application No. 2,833,711.

Canadian Office Action dated Jun. 20, 2019 in corresponding CA Application No. 2,964,597.

Office Action dated Jun. 7, 2019 in corresponding U.S. Appl. No. 16/268,030.

International Search Report and Written Opinion dated Sep. 11, 2019 in related PCT Application No. PCT/US2019/037493.

Office Action dated Aug. 19, 2019 in related U.S. Appl. No. 15/356,436.

Office Action dated Oct. 2, 2019 in related U.S. Appl. No. 16/152,732.

Office Action dated Sep. 11, 2019 in related U.S. Appl. No. 16/268,030.

Office Action dated Oct. 11, 2019 in related U.S. Appl. No. 16/385,070.

Office Action dated Sep. 3, 2019 in related U.S. Appl. No. 15/994,772.

Office Action dated Sep. 20, 2019 in related U.S. Appl. No. 16/443,273.

Canadian Office Action dated Oct. 1, 2019 in related Canadian Patent Application No. 2,936,997.

International Search Report and Written Opinion dated Nov. 26, 2019 in related PCT Application No. PCT/US19/51018.

International Search Report and Written Opinion dated Jan. 2, 2020 in related PCT Application No. PCT/US19/55325.

Notice of Allowance dated Jan. 9, 2020 in related U.S. Appl. No. 16/570,331.

Non-Final Office Action dated Dec. 23, 2019 in related U.S. Appl. No. 16/597,008.

Non-Final Office Action dated Jan. 10, 2020 in related U.S. Appl. No. 16/597,014.

Non-Final Office Action dated Dec. 6, 2019 in related U.S. Appl. No. 16/564,186.

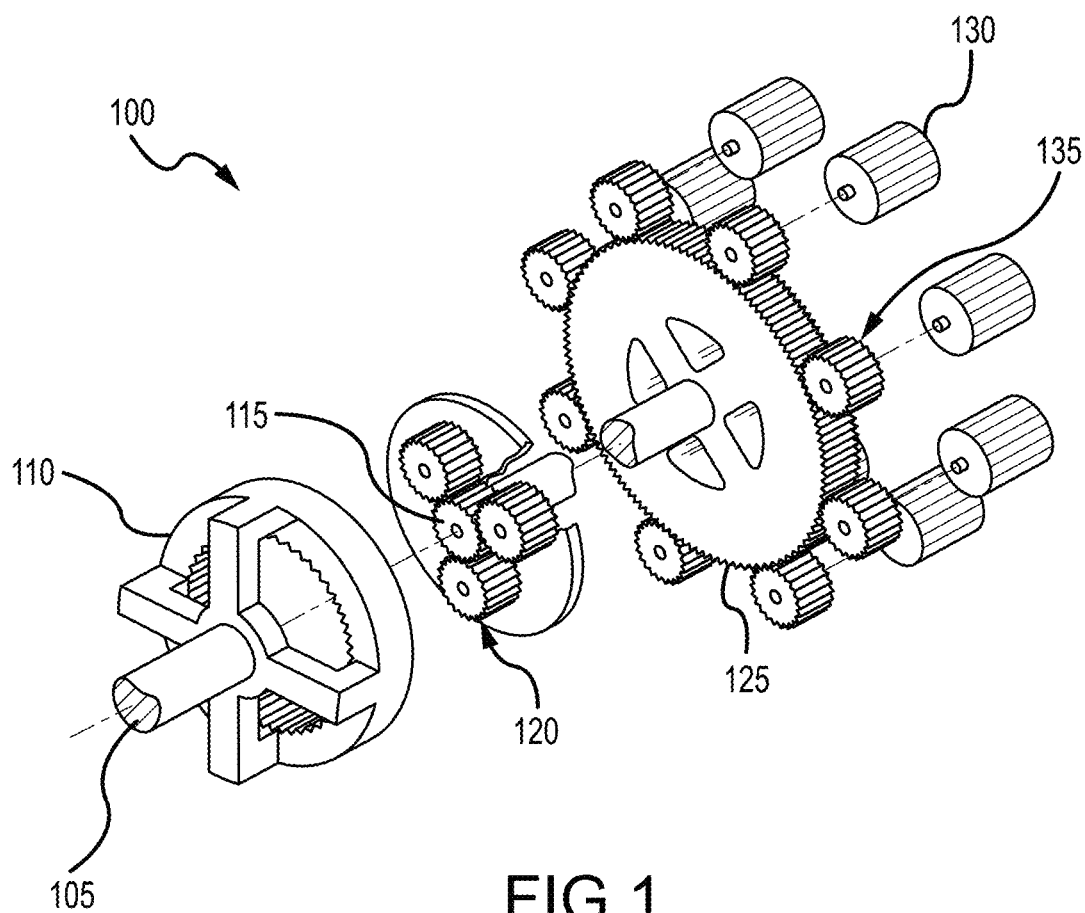


FIG. 1

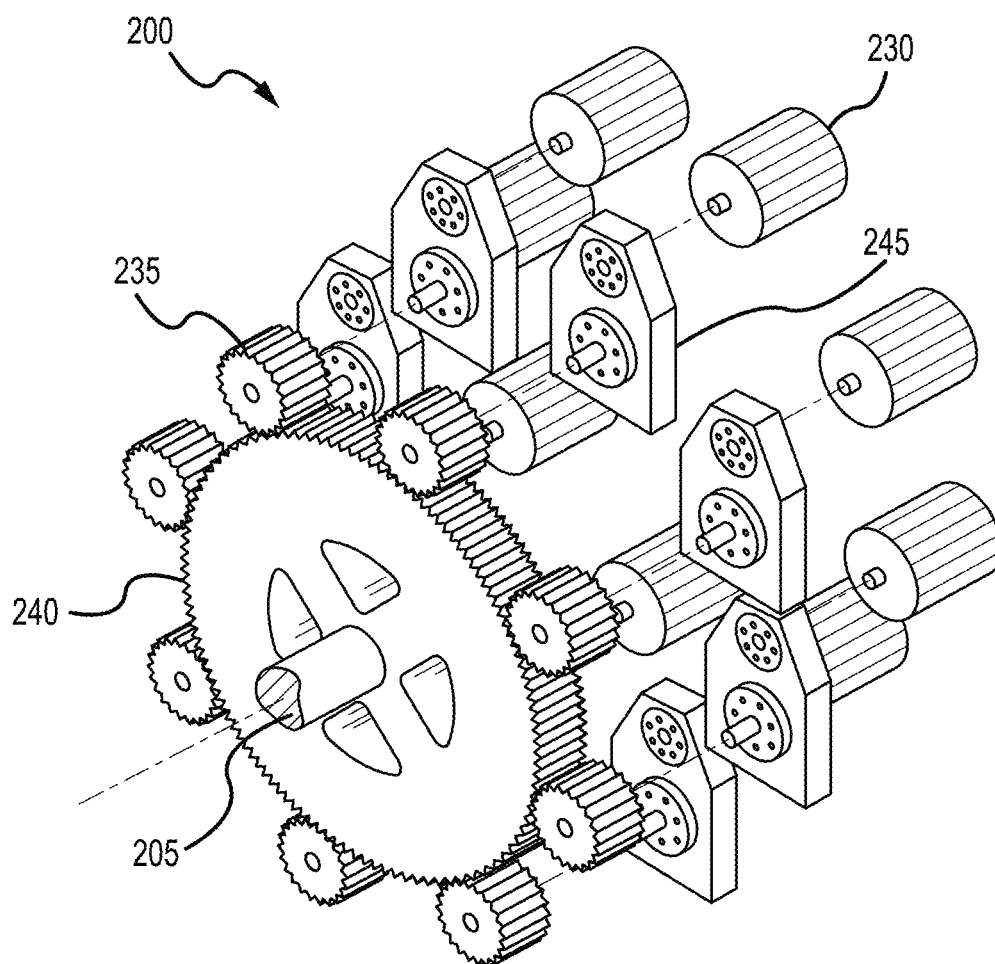


FIG.2

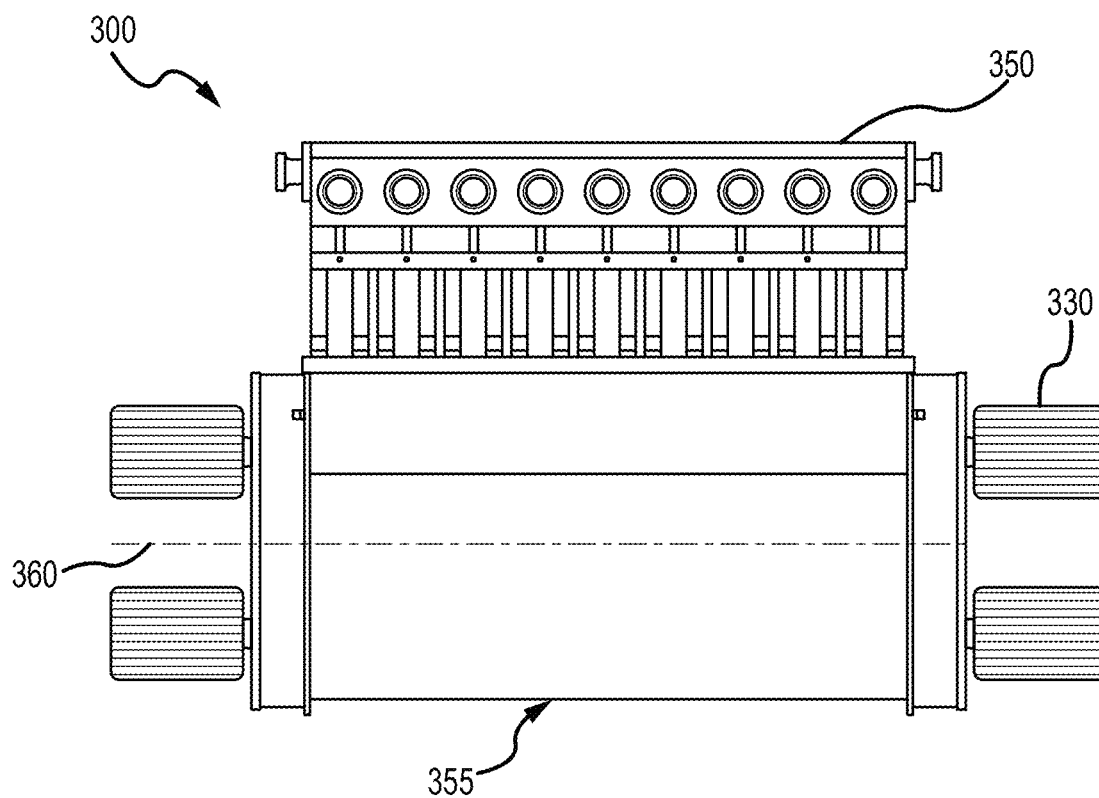


FIG.3

Plunger Critical Speed Calculations

Plunger Critical Speed = 32 in/sec (based on 120 rpm crankshaft speed on 8" stroke pump)
 Plunger Maximum Speed = 40 in/sec (based on 150 rpm crankshaft speed on 8" stroke pump)

	Pump Stroke (in.)	Volume per rev. (BBL)				Crankshaft rpm		Discharge Rates (BPM) at Critical Speed				Discharge Rates (BPM) at Maximum Speed			
		Triplex	Quint	9 Plunger	13 Plunger	Critical	Maximum	Triplex	Quint	9 Plunger	13 Plunger	Triplex	Quint	9 Plunger	13 Plunger
2.75" Bore	8	0.01469	0.01749	0.04408	0.06967	120.00	150.00								
	9	0.01653	0.02155	0.04999	0.07163	106.67	133.33								
	10	0.01837	0.03061	0.05510	0.07959	96.00	120.00	1.76	2.94	5.29	8.63	2.20	3.67	6.61	9.55
	11	0.02020	0.03397	0.06081	0.08754	87.27	109.09								
	12	0.02204	0.03673	0.06612	0.09550	80.00	100.00								
	13	0.02388	0.03979	0.07163	0.10346	73.85	92.31								
3.0" Bore	8	0.01749	0.02114	0.05246	0.07577	120.00	150.00								
	9	0.01967	0.02279	0.05903	0.08524	106.67	133.33								
	10	0.02186	0.02643	0.06557	0.09471	96.00	120.00	2.10	3.50	6.29	9.89	2.62	4.37	7.87	11.37
	11	0.02404	0.03007	0.07213	0.10419	87.27	109.09								
	12	0.02623	0.03371	0.07869	0.11366	80.00	100.00								
	13	0.02841	0.04736	0.08524	0.12313	73.85	92.31								
3.25" Bore	8	0.02052	0.02420	0.06156	0.08893	120.00	150.00								
	9	0.02309	0.03348	0.06926	0.10004	106.67	133.33								
	10	0.02565	0.04275	0.07696	0.11116	96.00	120.00	2.46	4.10	7.39	10.67	3.08	5.13	9.23	13.34
	11	0.02822	0.04703	0.08466	0.12227	87.27	109.09								
	12	0.03078	0.05130	0.09235	0.13339	80.00	100.00								
	13	0.03335	0.05558	0.10004	0.14450	73.85	92.31								
3.5" Bore	8	0.02380	0.02967	0.07340	0.10313	120.00	150.00								
	9	0.02677	0.04462	0.08032	0.11602	106.67	133.33								
	10	0.02975	0.04958	0.08925	0.12892	96.00	120.00	2.86	4.76	8.57	12.38	3.57	5.96	10.71	15.47
	11	0.03272	0.05454	0.09817	0.14181	87.27	109.09								
	12	0.03570	0.05930	0.10710	0.15470	80.00	100.00								
	13	0.03867	0.06446	0.11602	0.16759	73.85	92.31								
4.0" Bore	8	0.03109	0.03181	0.08326	0.13470	120.00	150.00								
	9	0.03497	0.05829	0.10491	0.15154	106.67	133.33								
	10	0.03886	0.06476	0.11657	0.16838	96.00	120.00	3.23	5.22	13.39	16.16	4.56	7.77	13.99	20.21
	11	0.04273	0.07124	0.12823	0.18522	87.27	109.09								
	12	0.04662	0.07771	0.13989	0.20206	80.00	100.00								
	13	0.05051	0.08419	0.15154	0.21889	73.85	92.31								
4.5" Bore	8	0.03934	0.06557	0.11803	0.17049	120.00	150.00								
	9	0.04426	0.07377	0.13278	0.19180	106.67	133.33								
	10	0.04918	0.08196	0.14754	0.21311	96.00	120.00	4.72	7.87	14.16	20.46	5.90	9.54	17.70	25.57
	11	0.05410	0.09016	0.16229	0.23442	87.27	109.09								
	12	0.05902	0.09836	0.17704	0.25573	80.00	100.00								
	13	0.06393	0.10655	0.19180	0.27704	73.85	92.31								
5.0" Bore	8	0.04857	0.08095	0.14571	0.21048	120.00	150.00								
	9	0.05484	0.09107	0.16393	0.23678	106.67	133.33								
	10	0.06111	0.10119	0.18214	0.26309	96.00	120.00	5.83	9.71	17.49	25.26	7.29	12.14	21.86	31.57
	11	0.06739	0.11131	0.20036	0.28940	87.27	109.09								
	12	0.07366	0.12143	0.21857	0.31571	80.00	100.00								
	13	0.07993	0.13155	0.19180	0.34202	73.85	92.31								

FIG. 4

Transmission CAT TH55-E90 Ratios			Tire Pump Fluid End Quint	
			Bar	PSI/Bar
1st Gear	4.07			
2nd Gear	3.49		1.0	0.00157
3rd Gear	3.08		4.5	0.06540
4th Gear	2.53		3.0	0.03333
5th Gear	2.22			
6th Gear	1.89			
7th Gear	1.84			
8th Gear	1.38			
9th Gear	1.00			

CAT TH55-E90 Transmission - Quint Pumps																	
Fluid End	Gear	Engine			Gear	Engine			Gear	Engine			Gear	Engine			Gear
		rpm	Pump Crank rpm	Pump BPM		rpm	Pump Crank rpm	Pump BPM		rpm	Pump Crank rpm	Pump BPM		rpm	Pump Crank rpm	Pump BPM	
4.0"	1st Gear	1500	500	3.33	2nd Gear	1500	438	2.92	3rd Gear	1500	375	2.50	4th Gear	1500	313	2.08	5th Gear
		1550	517	3.45		1550	454	3.03		1550	391	2.60		1550	330	2.20	
		1600	533	3.56		1600	470	3.13		1600	407	2.71		1600	347	2.31	
		1650	550	3.67		1650	486	3.24		1650	424	2.82		1650	364	2.42	
	2nd Gear	1700	567	3.78	3rd Gear	1700	502	3.35	4th Gear	1700	440	2.93	5th Gear	1700	381	2.53	6th Gear
		1750	583	3.89		1750	518	3.45		1750	456	3.04		1750	397	2.64	
		1800	600	4.00		1800	534	3.56		1800	472	3.14		1800	413	2.75	
		1850	617	4.11		1850	550	3.67		1850	488	3.25		1850	429	2.86	
	3rd Gear	1900	633	4.22	4th Gear	1900	567	3.78	5th Gear	1900	504	3.36	6th Gear	1900	445	2.96	7th Gear
		1950	650	4.33		1950	583	3.89		1950	520	3.47		1950	461	3.07	
		2000	667	4.44		2000	599	4.00		2000	536	3.57		2000	477	3.18	
		2050	683	4.56		2050	615	4.11		2050	552	3.68		2050	493	3.29	
4.5"	1st Gear	1500	500	3.33	2nd Gear	1500	438	2.92	3rd Gear	1500	375	2.50	4th Gear	1500	313	2.08	5th Gear
		1550	517	3.45		1550	454	3.03		1550	391	2.60		1550	330	2.20	
		1600	533	3.56		1600	470	3.13		1600	407	2.71		1600	347	2.31	
		1650	550	3.67		1650	486	3.24		1650	424	2.82		1650	364	2.42	
	2nd Gear	1700	567	3.78	3rd Gear	1700	502	3.35	4th Gear	1700	440	2.93	5th Gear	1700	381	2.53	6th Gear
		1750	583	3.89		1750	518	3.45		1750	456	3.04		1750	397	2.64	
		1800	600	4.00		1800	534	3.56		1800	472	3.14		1800	413	2.75	
		1850	617	4.11		1850	550	3.67		1850	488	3.25		1850	429	2.86	
	3rd Gear	1900	633	4.22	4th Gear	1900	567	3.78	5th Gear	1900	504	3.36	6th Gear	1900	445	2.96	7th Gear
		1950	650	4.33		1950	583	3.89		1950	520	3.47		1950	461	3.07	
		2000	667	4.44		2000	599	4.00		2000	536	3.57		2000	477	3.18	
		2050	683	4.56		2050	615	4.11		2050	552	3.68		2050	493	3.29	
5.0"	1st Gear	1500	500	3.33	2nd Gear	1500	438	2.92	3rd Gear	1500	375	2.50	4th Gear	1500	313	2.08	5th Gear
		1550	517	3.45		1550	454	3.03		1550	391	2.60		1550	330	2.20	
		1600	533	3.56		1600	470	3.13		1600	407	2.71		1600	347	2.31	
		1650	550	3.67		1650	486	3.24		1650	424	2.82		1650	364	2.42	
	2nd Gear	1700	567	3.78	3rd Gear	1700	502	3.35	4th Gear	1700	440	2.93	5th Gear	1700	381	2.53	6th Gear
		1750	583	3.89		1750	518	3.45		1750	456	3.04		1750	397	2.64	
		1800	600	4.00		1800	534	3.56		1800	472	3.14		1800	413	2.75	
		1850	617	4.11		1850	550	3.67		1850	488	3.25		1850	429	2.86	
	3rd Gear	1900	633	4.22	4th Gear	1900	567	3.78	5th Gear	1900	504	3.36	6th Gear	1900	445	2.96	7th Gear
		1950	650	4.33		1950	583	3.89		1950	520	3.47		1950	461	3.07	
		2000	667	4.44		2000	599	4.00		2000	536	3.57		2000	477	3.18	
		2050	683	4.56		2050	615	4.11		2050	552	3.68		2050	493	3.29	

FIG. 5

Transmission	
Allison 9800 Ratios	
1st Gear	5.71
2nd Gear	2.58
3rd Gear	2.20
4th Gear	1.77
5th Gear	1.58
6th Gear	1.27
7th Gear	1.00

Frac Pump	
Fluid End	Triplex Rev/rev
4.0"	0.02107
4.5"	0.02893
5.0"	0.04855

Allison 9800 Transmission, Triplex Pumps

	THROTTLE 4.0"	Engine rpm	Pump Crank rpm	Pump BPM		THROTTLE 4.5"	Engine rpm	Pump Crank rpm	Pump BPM		THROTTLE 4.0"	Engine rpm	Pump Crank rpm	Pump BPM		THROTTLE 4.0"	Engine rpm	Pump Crank rpm	Pump BPM																												
		1500	65.0	1.00		1550	67.5	1.05	1600		70.0	1.10	1650	72.5		1.15	1700	75.0	1.20	1750	77.5	1.25	1800	80.0	1.30	1850	82.5	1.35	1900	85.0	1.40	1950	87.5	1.45													
Allison 9800 Transmission	1st Gear	1500	65.0	1.00	2nd Gear	1500	67.5	1.05	3rd Gear	1500	70.0	1.10	4th Gear	1500	72.5	1.15		1500	75.0	1.20	1550	77.5	1.25	1600	80.0	1.30	1650	82.5	1.35	1700	85.0	1.40	1750	87.5	1.45												
		1550	68.1	1.02		1550	70.7	1.07		1550	73.2	1.12		1550	75.7	1.17		1550	78.2	1.22	1550	80.7	1.27	1600	83.2	1.32	1650	85.7	1.37	1700	88.2	1.42	1750	90.7	1.47	1800	93.2	1.52	1850	95.7	1.57	1900	98.2	1.62	1950	100.7	1.67
		1600	71.2	1.05		1600	73.8	1.10		1600	76.3	1.15		1600	78.8	1.20		1600	81.3	1.25	1600	83.8	1.30	1650	86.3	1.35	1700	88.8	1.40	1750	91.3	1.45	1800	93.8	1.50	1850	96.3	1.55	1900	98.8	1.60	1950	101.3	1.65			
		1650	73.3	1.10		1650	75.9	1.15		1650	78.4	1.20		1650	80.9	1.25		1650	83.4	1.30	1650	85.9	1.35	1700	88.4	1.40	1750	90.9	1.45	1800	93.4	1.50	1850	95.9	1.55	1900	98.4	1.60	1950	100.9	1.65						
		1700	75.4	1.15		1700	78.0	1.20		1700	80.5	1.25		1700	83.0	1.30		1700	85.5	1.35	1700	88.0	1.40	1750	90.5	1.45	1800	93.0	1.50	1850	95.5	1.55	1900	98.0	1.60	1950	100.5	1.65									
		1750	77.5	1.20		1750	80.1	1.25		1750	82.6	1.30		1750	85.1	1.35		1750	87.6	1.40	1750	90.1	1.45	1800	92.6	1.50	1850	95.1	1.55	1900	97.6	1.60	1950	100.1	1.65												
		1800	79.6	1.25		1800	82.2	1.30		1800	84.7	1.35		1800	87.2	1.40		1800	89.7	1.45	1800	92.2	1.50	1850	94.7	1.55	1900	97.2	1.60	1950	99.7	1.65															
		1850	81.7	1.30		1850	84.3	1.35		1850	86.8	1.40		1850	89.3	1.45		1850	91.8	1.50	1850	94.3	1.55	1900	96.8	1.60	1950	99.3	1.65																		
		1900	83.8	1.35		1900	86.4	1.40		1900	88.9	1.45		1900	91.4	1.50		1900	93.9	1.55	1900	96.4	1.60	1950	98.9	1.65																					
		1950	85.9	1.40		1950	88.5	1.45		1950	91.0	1.50		1950	93.5	1.55		1950	96.0	1.60																											
Allison 9800 Transmission	1st Gear	1500	68.0	2.08	2nd Gear	1500	70.7	2.16	3rd Gear	1500	73.4	2.24	4th Gear	1500	76.1	2.32		1500	78.8	2.40	1550	81.5	2.48	1600	84.2	2.56	1650	86.9	2.64	1700	89.6	2.72	1750	92.3	2.80	1800	95.0	2.88	1850	97.7	2.96	1900	100.4	3.04	1950	103.1	3.12
		1550	71.3	2.19		1550	74.0	2.27		1550	76.7	2.35		1550	79.4	2.43		1550	82.1	2.51	1550	84.8	2.59	1600	87.5	2.67	1650	90.2	2.75	1700	92.9	2.83	1750	95.6	2.91	1800	98.3	2.99	1850	101.0	3.07	1900	103.7	3.15	1950	106.4	3.23
		1600	74.2	2.22		1600	76.9	2.30		1600	79.6	2.38		1600	82.3	2.46		1600	85.0	2.54	1600	87.7	2.62	1650	90.4	2.70	1700	93.1	2.78	1750	95.8	2.86	1800	98.5	2.94	1850	101.2	3.02	1900	103.9	3.10	1950	106.6	3.18			
		1650	76.3	2.26		1650	79.0	2.34		1650	81.7	2.42		1650	84.4	2.50		1650	87.1	2.58	1650	89.8	2.66	1700	92.5	2.74	1750	95.2	2.82	1800	97.9	2.90	1850	100.6	2.98	1900	103.3	3.06	1950	106.0	3.14						
		1700	78.4	2.31		1700	81.1	2.39		1700	83.8	2.47		1700	86.5	2.55		1700	89.2	2.63	1700	91.9	2.71	1750	94.6	2.79	1800	97.3	2.87	1850	100.0	2.95	1900	102.7	3.03	1950	105.4	3.11									
		1750	80.5	2.35		1750	83.2	2.43		1750	85.9	2.51		1750	88.6	2.59		1750	91.3	2.67	1750	94.0	2.75	1800	96.7	2.83	1850	99.4	2.91	1900	102.1	2.99	1950	104.8	3.07												
		1800	82.6	2.39		1800	85.3	2.47		1800	88.0	2.55		1800	90.7	2.63		1800	93.4	2.71	1800	96.1	2.79	1850	98.8	2.87	1900	101.5	2.95	1950	104.2	3.03															
		1850	84.7	2.43		1850	87.4	2.51		1850	90.1	2.59		1850	92.8	2.67		1850	95.5	2.75	1850	98.2	2.83	1900	100.9	2.91	1950	103.6	2.99																		
		1900	86.8	2.47		1900	89.5	2.55		1900	92.2	2.63		1900	94.9	2.71		1900	97.6	2.79	1900	100.3	2.87	1950	103.0	2.95																					
		1950	88.9	2.51		1950	91.6	2.59		1950	94.3	2.67																																			
Allison 9800 Transmission	1st Gear	1500	69.0	2.08	2nd Gear	1500	71.7	2.16	3rd Gear	1500	74.4	2.24	4th Gear	1500	77.1	2.32		1500	79.8	2.40	1550	82.5	2.48	1600	85.2	2.56	1650	87.9	2.64	1700	90.6	2.72	1750	93.3	2.80	1800	96.0	2.88	1850	98.7	2.96	1900	101.4	3.04	1950	104.1	3.12
		1550	72.3	2.19		1550	75.0	2.27		1550	77.7	2.35		1550	80.4	2.43		1550	83.1	2.51	1550	85.8	2.59	1600	88.5	2.67	1650	91.2	2.75	1700	93.9	2.83	1750	96.6	2.91	1800	99.3	2.99	1850	102.0	3.07	1900	104.7	3.15	1950	107.4	3.23
		1600	74.2	2.22		1600	76.9	2.30		1600	79.6	2.38		1600	82.3	2.46		1600	85.0	2.54	1600	87.7	2.62	1650	90.4	2.70	1700	93.1	2.78	1750	95.8	2.86	1800	98.5	2.94	1850	101.2	3.02	1900	103.9	3.10	1950	106.6	3.18			
		1650	76.3	2.26		1650	79.0	2.34		1650	81.7	2.42		1650	84.4	2.50		1650	87.1	2.58	1650	89.8	2.66	1700	92.5	2.74	1750	95.2	2.82	1800	97.9	2.90	1850	100.6	2.98	1900	103.3	3.06	1950	106.0	3.14						
		1700	78.4	2.31		1700	81.1	2.39		1700	83.8	2.47		1700	86.5	2.55		1700	89.2	2.63	1700	91.9	2.71	1750	94.6	2.79	1800	97.3	2.87	1850	100.0	2.95	1900	102.7	3.03	1950	105.4	3.11									
		1750	80.5	2.35		1750	83.2	2.43		1750	85.9	2.51		1750	88.6	2.59		1750	91.3	2.67	1750	94.0	2.75	1800	96.7	2.83	1850	99.4	2.91	1900	102.1	2.99	1950	104.8	3.07												
		1800	82.6	2.39		1800	85.3	2.47		1800	88.0	2.55		1800	90.7	2.63		1800	93.4	2.71	1800	96.1	2.79	1850	98.8	2.87	1900	101.5	2.95	1950	104.2	3.03															
		1850	84.7	2.43		1850	87.4	2.51		1850	90.1	2.59		1850	92.8	2.67		1850	95.5	2.75	1850	98.2	2.83	1900	100.9	2.91	1950	103.6	2.99																		
		1900	86.8	2.47		1900	89.5	2.55		1900	92.2	2.63		1900	94.9	2.71		1900	97.6	2.79	1900	100.3	2.87	1950	103.0	2.95																					
		1950	88.9	2.51		1950	91.6	2.59		1950	94.3	2.67																																			

FIG. 6

Transmission	
Allison 9800 Ratios	
1st Gear	3.75
2nd Gear	2.63
3rd Gear	2.20
4th Gear	1.77
5th Gear	1.58
6th Gear	1.27
7th Gear	1.00

Frac Pump	
Fluid End Bore	Quint BBL/rev
4.0"	0.05167
4.5"	0.06948
5.0"	0.08095

Allison 9800 Transmission, Quint Pumps

	Quint 4.0"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 4.0"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 4.0"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 4.0"	Engine rpm	Pump Crank rpm	Pump BPM
		1500	83.0	3.25		1500	87.8	3.34		1500	107.3	3.55		1500	133.4	3.69
Allison 9800 Transmission	1st Gear	1550	85.1	3.36	2nd Gear	1550	90.7	3.46	3rd Gear	1550	110.9	3.73	4th Gear	1550	137.6	3.73
		1600	87.2	3.47		1600	93.8	3.54		1600	114.8	3.82		1600	142.3	3.73
		1650	89.3	3.58		1650	96.8	3.66		1650	118.1	3.92		1650	146.7	3.73
		1700	91.4	3.69		1700	99.9	3.74		1700	121.6	4.00		1700	151.2	3.73
		1750	93.5	3.80		1750	102.4	3.86		1750	125.2	4.17		1750	155.6	3.80
		1800	95.6	3.90		1800	106.3	3.94		1800	128.8	4.30		1800	160.1	3.87
		1850	97.7	4.03		1850	108.3	4.06		1850	132.4	4.44		1850	164.5	3.94
		1900	99.8	4.12		1900	112.2	4.14		1900	135.9	4.52		1900	168.9	4.01
		1950	81.9	4.23		1950	114.1	4.26		1950	138.5	4.71		1950	173.4	4.08
	Quint 4.5"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 4.5"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 4.5"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 4.5"	Engine rpm	Pump Crank rpm	Pump BPM
		1500	83.0	3.12		1500	87.8	3.25		1500	107.3	3.43		1500	133.4	3.73
Allison 9800 Transmission	1st Gear	1550	85.1	3.26	2nd Gear	1550	90.7	3.34	3rd Gear	1550	110.9	3.68	4th Gear	1550	137.6	3.68
		1600	87.2	3.40		1600	93.8	3.52		1600	114.8	3.80		1600	142.3	3.68
		1650	89.3	3.54		1650	96.8	3.62		1650	118.1	3.92		1650	146.7	3.68
		1700	91.4	3.68		1700	99.9	3.71		1700	121.6	4.06		1700	151.2	3.68
		1750	93.5	3.81		1750	102.4	3.79		1750	125.2	4.20		1750	155.6	3.75
		1800	95.6	3.95		1800	106.3	3.87		1800	128.8	4.33		1800	160.1	3.82
		1850	97.7	4.09		1850	108.3	3.99		1850	132.4	4.47		1850	164.5	3.89
		1900	99.8	4.22		1900	112.2	4.07		1900	135.9	4.60		1900	168.9	3.96
		1950	81.9	4.36		1950	114.1	4.17		1950	139.5	4.74		1950	173.4	4.03
	Quint 5.0"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 5.0"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 5.0"	Engine rpm	Pump Crank rpm	Pump BPM	Quint 5.0"	Engine rpm	Pump Crank rpm	Pump BPM
		1500	83.0	3.00		1500	87.8	3.11		1500	107.3	3.30		1500	133.4	3.60
Allison 9800 Transmission	1st Gear	1550	85.0	3.10	2nd Gear	1550	90.7	3.11	3rd Gear	1550	110.9	3.49	4th Gear	1550	133.4	3.60
		1550	86.1	3.21		1550	91.7	3.24		1550	110.9	3.58		1550	137.6	3.60
		1600	87.2	3.34		1600	93.6	3.38		1600	110.9	3.67		1600	142.3	3.60
		1650	88.3	3.47		1650	95.6	3.54		1650	110.9	3.76		1650	146.7	3.60
		1700	89.4	3.60		1700	97.7	3.69		1700	111.0	3.85		1700	151.2	3.60
		1750	90.5	3.73		1750	100.4	3.79		1750	111.1	4.03		1750	155.6	3.65
		1800	91.6	3.87		1800	103.4	3.89		1800	111.2	4.14		1800	160.1	3.72
		1850	92.7	4.00		1850	106.3	3.99		1850	111.3	4.27		1850	164.5	3.79
		1900	93.8	4.14		1900	109.3	4.10		1900	111.4	4.41		1900	168.9	3.86
		1950	94.9	4.27		1950	112.2	4.21		1950	111.5	4.55		1950	173.4	3.93

FIG. 7

Transmission			
CAT TH55-E70 Rating			
1st Gear	2.25		
2nd Gear	4.50		
3rd Gear	5.28		
4th Gear	2.45		
5th Gear	1.90		
6th Gear	3.50		
7th Gear	1.10		

Gear Pump	
Fluid End	Triplex
Barrel	886/rev
4.5"	0.00001
4.5"	0.00005
4.5"	0.00001

CAT TH55-E70 Transmission, Triplex Pumps

Transmission	Gear	1st Gear			Gear	2nd Gear			Gear	3rd Gear			Gear	4th Gear			Gear	5th Gear			Gear	6th Gear			Gear	7th Gear		
		Engine rpm	Pump Crank rpm	Pump BPM		Engine rpm	Pump Crank rpm	Pump BPM		Engine rpm	Pump Crank rpm	Pump BPM		Engine rpm	Pump Crank rpm	Pump BPM		Engine rpm	Pump Crank rpm	Pump BPM		Engine rpm	Pump Crank rpm	Pump BPM		Engine rpm	Pump Crank rpm	Pump BPM
CAT TH55-E70 Transmission	1st Gear	1500	330	2.25	2nd Gear	1500	330	2.25	3rd Gear	1500	330	2.25	4th Gear	1500	330	2.25	5th Gear	1500	330	2.25	6th Gear	1500	330	2.25	7th Gear	1500	330	2.25
		1550	340	2.25		1550	340	2.25		1550	340	2.25		1550	340	2.25		1550	340	2.25		1550	340	2.25		1550	340	2.25
		1600	350	2.25		1600	350	2.25		1600	350	2.25		1600	350	2.25		1600	350	2.25		1600	350	2.25		1600	350	2.25
		1650	360	2.25		1650	360	2.25		1650	360	2.25		1650	360	2.25		1650	360	2.25		1650	360	2.25		1650	360	2.25
		1700	370	2.25		1700	370	2.25		1700	370	2.25		1700	370	2.25		1700	370	2.25		1700	370	2.25		1700	370	2.25
		1750	380	2.25		1750	380	2.25		1750	380	2.25		1750	380	2.25		1750	380	2.25		1750	380	2.25		1750	380	2.25
		1800	390	2.25		1800	390	2.25		1800	390	2.25		1800	390	2.25		1800	390	2.25		1800	390	2.25		1800	390	2.25
		1850	400	2.25		1850	400	2.25		1850	400	2.25		1850	400	2.25		1850	400	2.25		1850	400	2.25		1850	400	2.25
		1900	410	2.25		1900	410	2.25		1900	410	2.25		1900	410	2.25		1900	410	2.25		1900	410	2.25		1900	410	2.25
		1950	420	2.25		1950	420	2.25		1950	420	2.25		1950	420	2.25		1950	420	2.25		1950	420	2.25		1950	420	2.25
CAT TH55-E70 Transmission	2nd Gear	1500	330	4.50	3rd Gear	1500	330	4.50	4th Gear	1500	330	4.50	5th Gear	1500	330	4.50	6th Gear	1500	330	4.50	7th Gear	1500	330	4.50	8th Gear	1500	330	4.50
		1550	340	4.50		1550	340	4.50		1550	340	4.50		1550	340	4.50		1550	340	4.50		1550	340	4.50		1550	340	4.50
		1600	350	4.50		1600	350	4.50		1600	350	4.50		1600	350	4.50		1600	350	4.50		1600	350	4.50		1600	350	4.50
		1650	360	4.50		1650	360	4.50		1650	360	4.50		1650	360	4.50		1650	360	4.50		1650	360	4.50		1650	360	4.50
		1700	370	4.50		1700	370	4.50		1700	370	4.50		1700	370	4.50		1700	370	4.50		1700	370	4.50		1700	370	4.50
		1750	380	4.50		1750	380	4.50		1750	380	4.50		1750	380	4.50		1750	380	4.50		1750	380	4.50		1750	380	4.50
		1800	390	4.50		1800	390	4.50		1800	390	4.50		1800	390	4.50		1800	390	4.50		1800	390	4.50		1800	390	4.50
		1850	400	4.50		1850	400	4.50		1850	400	4.50		1850	400	4.50		1850	400	4.50		1850	400	4.50		1850	400	4.50
		1900	410	4.50		1900	410	4.50		1900	410	4.50		1900	410	4.50		1900	410	4.50		1900	410	4.50		1900	410	4.50
		1950	420	4.50		1950	420	4.50		1950	420	4.50		1950	420	4.50		1950	420	4.50		1950	420	4.50		1950	420	4.50
CAT TH55-E70 Transmission	3rd Gear	1500	330	5.28	4th Gear	1500	330	5.28	5th Gear	1500	330	5.28	6th Gear	1500	330	5.28	7th Gear	1500	330	5.28	8th Gear	1500	330	5.28	9th Gear	1500	330	5.28
		1550	340	5.28		1550	340	5.28		1550	340	5.28		1550	340	5.28		1550	340	5.28		1550	340	5.28		1550	340	5.28
		1600	350	5.28		1600	350	5.28		1600	350	5.28		1600	350	5.28		1600	350	5.28		1600	350	5.28		1600	350	5.28
		1650	360	5.28		1650	360	5.28		1650	360	5.28		1650	360	5.28		1650	360	5.28		1650	360	5.28		1650	360	5.28
		1700	370	5.28		1700	370	5.28		1700	370	5.28		1700	370	5.28		1700	370	5.28		1700	370	5.28		1700	370	5.28
		1750	380	5.28		1750	380	5.28		1750	380	5.28		1750	380	5.28		1750	380	5.28		1750	380	5.28		1750	380	5.28
		1800	390	5.28		1800	390	5.28		1800	390	5.28		1800	390	5.28		1800	390	5.28		1800	390	5.28		1800	390	5.28
		1850	400	5.28		1850	400	5.28		1850	400	5.28		1850	400	5.28		1850	400	5.28		1850	400	5.28		1850	400	5.28
		1900	410	5.28		1900	410	5.28		1900	410	5.28		1900	410	5.28		1900	410	5.28		1900	410	5.28		1900	410	5.28
		1950	420	5.28		1950	420	5.28		1950	420	5.28		1950	420	5.28		1950	420	5.28		1950	420	5.28		1950	420	5.28

FIG. 8

RPMs/1000		
CAT TH55-E70 E-2000		
1st Gear	5.22	
2nd Gear	4.55	
3rd Gear	4.20	
4th Gear	3.66	
5th Gear	3.22	
6th Gear	2.85	
7th Gear	2.50	

5th Pump	
Flow (GPM)	Head (ft)
100	2.50
200	2.50
300	2.50
400	2.50
500	2.50

CAT TH55-E70 Transmission, Quint Pumps

	Q200T 6.0				Q200T 6.0				Q200T 6.0				Q200T 6.0				Q200T 6.0			
	Engine rpm	Pump Crank rpm	Pump RPM		Engine rpm	Pump Crank rpm	Pump RPM		Engine rpm	Pump Crank rpm	Pump RPM		Engine rpm	Pump Crank rpm	Pump RPM		Engine rpm	Pump Crank rpm	Pump RPM	
CAT TH55-E70 Transmission	1st Gear	1500	37.5	1.50	2nd Gear	1500	37.5	1.50	3rd Gear	1500	37.5	1.50	4th Gear	1500	37.5	1.50	5th Gear	1500	37.5	1.50
		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55
		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60
		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65
		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70
		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75
		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80
		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85
		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90
		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95
CAT TH55-E70 Transmission	3rd Gear	1500	37.5	1.50	4th Gear	1500	37.5	1.50	5th Gear	1500	37.5	1.50	6th Gear	1500	37.5	1.50	7th Gear	1500	37.5	1.50
		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55
		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60
		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65
		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70
		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75
		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80
		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85
		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90
		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95
CAT TH55-E70 Transmission	5th Gear	1500	37.5	1.50	6th Gear	1500	37.5	1.50	7th Gear	1500	37.5	1.50	8th Gear	1500	37.5	1.50	9th Gear	1500	37.5	1.50
		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55		1550	38.0	1.55
		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60		1600	39.0	1.60
		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65		1650	40.0	1.65
		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70		1700	41.0	1.70
		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75		1750	42.0	1.75
		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80		1800	43.0	1.80
		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85		1850	44.0	1.85
		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90		1900	45.0	1.90
		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95		1950	46.0	1.95

FIG. 9

Transmission TA90-8501 Ratios		
5th Gear	4.47	
2nd Gear	3.57	
3rd Gear	2.85	
4th Gear	2.41	
5th Gear	1.92	
6th Gear	1.54	
7th Gear	1.25	
8th Gear	1.00	
9th Gear	0.80	

Frac Pump		
Fluid End	Quint	
4.0"	0.075667	
4.5"	0.06548	
5.0"	0.08095	

Twin Disc TA90-8501 Transmission - Quint Pumps																	
Fluid End	Gear	Engine rpm	Pump Crank rpm	Pump BPM	Gear	Engine rpm	Pump Crank rpm	Pump BPM	Gear	Engine rpm	Pump Crank rpm	Pump BPM	Gear	Engine rpm	Pump Crank rpm	Pump BPM	Gear
		1500	52.8	3.71		1500	56.1	3.42		1500	82.8	4.29		1500	98.0	5.00	
4.0"	1st Gear	1550	54.6	3.82	2nd Gear	1550	58.3	3.53	3rd Gear	1550	85.6	4.42	4th Gear	1550	101.2	5.23	5th Gear
		1600	56.3	3.93		1600	70.6	3.65		1600	88.3	4.57		1600	104.5	5.40	
		1650	58.1	4.04		1650	72.6	3.76		1650	91.1	4.71		1650	107.8	5.57	
		1700	59.9	4.15		1700	75.0	3.87		1700	93.9	4.85		1700	111.0	5.74	
		1750	61.6	4.26		1750	77.2	3.99		1750	96.7	4.98		1750	114.3	5.90	
	2nd Gear	1800	63.4	4.38		1800	79.4	4.10		1800	99.4	5.14		1800	117.6	6.07	
		1850	65.1	4.50		1850	81.6	4.21		1850	102.2	5.28		1850	120.8	6.24	
		1900	66.9	4.61		1900	83.8	4.33		1900	104.9	5.42		1900	124.1	6.41	
		1950	68.7	4.73		1950	86.0	4.44		1950	107.7	5.56		1950	127.4	6.58	
		2000	70.5	4.85		2000	88.3	4.57		2000	110.5	5.70		2000	130.7	6.75	
4.5"	1st Gear	1500	52.8	3.71	2nd Gear	1500	56.3	3.42	3rd Gear	1500	82.8	4.29	4th Gear	1500	98.0	5.00	5th Gear
		1550	54.6	3.82		1550	58.3	3.53		1550	85.6	4.42		1550	101.2	5.23	
		1600	56.3	3.93		1600	70.6	3.65		1600	88.3	4.57		1600	104.5	5.40	
		1650	58.1	4.04		1650	72.6	3.76		1650	91.1	4.71		1650	107.8	5.57	
		1700	59.9	4.15		1700	75.0	3.87		1700	93.9	4.85		1700	111.0	5.74	
	2nd Gear	1750	61.6	4.26		1750	77.2	3.99		1750	96.7	4.98		1750	114.3	5.90	
		1800	63.4	4.38		1800	79.4	4.10		1800	99.4	5.14		1800	117.6	6.07	
		1850	65.1	4.50		1850	81.6	4.21		1850	102.2	5.28		1850	120.8	6.24	
		1900	66.9	4.61		1900	83.8	4.33		1900	104.9	5.42		1900	124.1	6.41	
		1950	68.7	4.73		1950	86.0	4.44		1950	107.7	5.56		1950	127.4	6.58	
5.0"	1st Gear	1500	52.8	3.71	2nd Gear	1500	56.3	3.42	3rd Gear	1500	82.8	4.29	4th Gear	1500	98.0	5.00	5th Gear
		1550	54.6	3.82		1550	58.3	3.53		1550	85.6	4.42		1550	101.2	5.23	
		1600	56.3	3.93		1600	70.6	3.65		1600	88.3	4.57		1600	104.5	5.40	
		1650	58.1	4.04		1650	72.6	3.76		1650	91.1	4.71		1650	107.8	5.57	
		1700	59.9	4.15		1700	75.0	3.87		1700	93.9	4.85		1700	111.0	5.74	
	2nd Gear	1750	61.6	4.26		1750	77.2	3.99		1750	96.7	4.98		1750	114.3	5.90	
		1800	63.4	4.38		1800	79.4	4.10		1800	99.4	5.14		1800	117.6	6.07	
		1850	65.1	4.50		1850	81.6	4.21		1850	102.2	5.28		1850	120.8	6.24	
		1900	66.9	4.61		1900	83.8	4.33		1900	104.9	5.42		1900	124.1	6.41	
		1950	68.7	4.73		1950	86.0	4.44		1950	107.7	5.56		1950	127.4	6.58	

FIG. 10

1

**MULTI-PLUNGER PUMPS AND
ASSOCIATED DRIVE SYSTEMS****CROSS REFERENCE TO RELATED
APPLICATIONS**

This application claims priority to and the benefit of U.S. Provisional Patent Application No. 62/594,912, filed Dec. 5, 2017, the full disclosure of which is hereby incorporated by reference herein for all purposes.

BACKGROUND**1. Technical Field**

This disclosure relates generally to drive systems for reciprocating plunger-style pumps used in hydraulic fracturing operations, and more particularly to multi-plunger hydraulic fracturing pumps and associated drive systems.

2. Background

With advancements in technology over the past few decades, the ability to reach unconventional sources of hydrocarbons has tremendously increased. Horizontal drilling and hydraulic fracturing are two such ways that new developments in technology have led to hydrocarbon production from previously unreachable shale formations. Hydraulic fracturing (fracking) operations typically require powering numerous components in order to recover oil and gas resources from the ground. For example, hydraulic fracturing usually includes pumps that inject fracking fluid down the wellbore, blenders that mix proppant into the fluid, cranes, wireline units, and many other components that all must perform different functions to carry out fracking operations.

Hydraulic fracturing operations commonly use diesel-powered pumps to transmit fluid media down the well bore, the transmissions for the diesel-powered pumps often having seven speeds or more. When one or more pumps go offline during operation, for example due to system failure or for scheduled maintenance, the speed of the remaining operating pumps is increased accordingly. However, many of the top gears in these diesel transmissions provide speeds that are above the critical speed for the associated plunger pumps. Thus, compensating for the downed pump or pumps by up-shifting operation of the remaining pumps to these higher gears, above the critical speed for the pumps, can result in damage to the pumps. There is a need for hydraulic fracturing pumps that are capable of operation at or below the critical speed, without sacrificing pump rate, efficiency, and efficacy.

SUMMARY

One of the most common transmissions utilized in hydraulic fracturing pump applications is a nine-speed transmission, often driven by a diesel-powered engine. When this transmission is in fifth gear and the engine is running at 1700 rotations per minute (rpm), for example, the critical speed of 120 rpm on an associated 8-inch stroke pump is reached. Therefore, running the pump with the transmission operating in any of gears six through nine, above the critical speed reached at gear five, could cause pump cavitation and damage accumulation to the fluid end of the pump.

It has historically been believed that pump cavitation is caused by air entering the pump. Through testing and

2

data-gathering, however, Applicants have observed that pump cavitation and damage are caused by the formation of vacuum bubbles as a result of fluid being accelerated too fast through the pump. A heightened speed of operation creates low pressure within the pumps, creating vacuum bubbles. As the pump plungers retract, the vacuum bubbles implode, causing damage (cavitation) to the pump and engine systems. Although the risks of operating the pumps at too great of speeds may be known, concerns about lowered pump rates and lost efficiency resulting from maintaining slower transmission speeds commonly lead to disregard of the risks as an unavoidable consequence of maintaining pump efficiency.

In seeking to avoid such pump damage, Applicants have observed that, by operating transmissions such that pumps are maintained at or below critical pump speeds, such formation of vacuum bubbles and resulting pump cavitation and damage may be avoided. Further still, Applicants have observed that use of electric- or hydraulic-powered pumps may allow for better control of pump speeds at or below the critical speed due to the smaller increments between gear speeds as compared to those of pumps driven by diesel-powered engines.

Operation below critical pump speeds has previously been avoided as being considered inefficient and ineffective for pump usage in fracking, as slower pump speeds are historically believed to be directly tied to pump rates. Applicant has observed, however, that the introduction of multiple electric- or hydraulic-powered motors driving planetary gear trains can provide effective and efficient pumping power, thereby maintaining a consistent pump rate for fluid transfer, while also sustaining a pumping speed at or below the critical speed for the plungers. For example, Applicant discovered that varying pump bore sizes and stroke lengths, as well as number of plungers, allowed for operation at slower pump speeds while maintaining or increasing fluid pump rates. Applicant also discovered, through testing and analysis, that certain bore size, stroke length, and plunger number combinations provided maximum pump rate efficiency at a usable and economically effective overall pump size.

The present disclosure is directed to hydraulic fracturing system for fracturing a subterranean formation, according to various embodiments. In an embodiment, the hydraulic fracturing system can include a multi-plunger hydraulic fracturing pump fluidly connected to a well associated with the subterranean formation, and the multi-plunger pump can be configured to pump fluid into a wellbore associated with the well at a high pressure so that the fluid passes from the wellbore into the subterranean formation and fractures the subterranean formation. In an embodiment, the system can further include a plurality of motors positioned to power the multi-plunger pump, and a planetary gear train having a plurality of input pinion gears in rotational contact with each of the plurality of motors. In an embodiment, a gear ratio of the planetary gear train and a speed at which the plurality of motors operates can be selected so as to limit a maximum pump speed associated with the multi-plunger pump.

In an embodiment, the system can include a plurality of speed reduction gearboxes positioned between the plurality of input pinion gears and the plurality of motors so as to achieve a desired pump rate.

In an embodiment, the plurality of motors can include one of a plurality of electric motors or a plurality of hydraulic motors.

In an embodiment, the maximum pump speed can correlate to a critical plunger speed associated with each of the plurality of hydraulic pumps.

In an embodiment, the maximum pump speed can be 5% or less over a critical plunger speed associated with each of the plurality of hydraulic pumps.

In an embodiment, the plurality of hydraulic pumps includes an odd number of plungers greater than or equal to five plungers.

In an embodiment, a stroke length of each of the plungers associated with the plurality of hydraulic pumps can be selected to inversely relate to a pump speed associated with the plurality of hydraulic pumps so as to achieve a predetermined flow rate.

In an embodiment, the system can include a variable frequency drive (VFD) connected to the plurality of motors to control the speed of the plurality of motors. The VFD can be positioned to accelerate or decelerate pump rotational speeds associated with each of the plurality of hydraulic pumps, according to an embodiment.

In an embodiment, the VFD can include a plurality of VFDs and the plurality of VFDs can be configured to share a load required to power the plurality of hydraulic pumps.

In an embodiment, the plurality of VFDs can be configured to automatically shut off in the event of an overpressure event with respect to the plurality of hydraulic pumps.

The present disclosure is also related to a hydraulic fracturing system for fracturing a subterranean formation, according to an embodiment. In an embodiment, the system can include a multi-plunger hydraulic fracturing pump fluidly connected to a well associated with the subterranean formation, and the multi-plunger pump can be configured to pump fluid into a wellbore associated with the well at a high pressure so that the fluid passes from the wellbore into the subterranean formation and fractures the subterranean formation. In an embodiment, a plurality of motors can be positioned to power the multi-plunger pump. The system can further include a variable frequency drive connected to the plurality of motors to control the speeds of the plurality of electric motors, according to an embodiment. In an embodiment, the system can include a planetary gear train having a plurality of input pinion gears in rotational contact with each of the plurality of motors. In an embodiment, a gear ratio of the planetary gear train and a speed at which the plurality of motors operates can be selected so as to limit a maximum pump speed associated with the multi-plunger pump.

The present disclosure is also directed to a method for pumping fluid into a wellbore associated with a subterranean formation. In an embodiment, the method can include fluidly connecting a multi-plunger hydraulic fracturing pump to a well associated with the subterranean formation such that the multi-plunger pump pumps fluid into the wellbore at a high pressure so that fluid passes from the wellbore into the subterranean formation and fractures the subterranean formation. In an embodiment, the method can include powering the multi-plunger pump with a plurality of motors. In an embodiment, the method can further include providing a planetary gear train having a plurality of input pinion gears in rotational contact with each of the plurality of motors so as to translate power from the plurality of motors into a desired pump rate of the multi-plunger pump.

Other aspects and features of the present disclosure will become apparent to those of ordinary skill in the art after reading the detailed description herein and the accompanying figures.

BRIEF DESCRIPTION OF DRAWINGS

Some of the features and benefits of the present invention having been stated, others will become apparent as the description proceeds when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is an exploded schematic example of a planetary gear train having multiple input pinions for direct connection to an electric motor, according to an embodiment.

FIG. 2 is an exploded schematic example of a planetary gear train having a speed reduction gearbox mounting for connection to an electric motor, according to an embodiment.

FIG. 3 is a schematic example of a multi-plunger pump having nine plungers and four electric motors mounted for driving the multi-plunger pump, according to an embodiment.

FIG. 4 is a table showing calculations of plunger pump critical speeds according to embodiments of the present technology.

FIG. 5 is a table showing data related to certain pumps and transmissions in an example application, meant to highlight certain embodiments of the present technology.

FIGS. 6-10 are tables showing additional data related to certain pumps and transmissions in further example applications, meant to further highlight embodiments of the present technology.

While the invention will be described in connection with the preferred embodiments, it will be understood that the included description is not intended to limit the invention to the described preferred embodiments. On the contrary, the description is intended to cover all alternatives, modifications, and equivalents, as may be included within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF INVENTION

The method and system of the present disclosure will now be described more fully hereinafter with reference to the accompanying drawings in which embodiments are shown. The method and system of the present disclosure may be in many different forms and should not be construed as limited to the illustrated embodiments set forth herein: rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey its scope to those skilled in the art. Like numbers refer to like elements throughout.

It is to be further understood that the scope of the present disclosure is not limited the exact details of construction, operation, exact materials, or embodiments shown and described, as modifications and equivalents will be apparent to one skilled in the art. In the drawings and specification, there have been disclosed illustrative embodiments and, although specific terms are employed, they are used in a generic and descriptive sense only and not for the purpose of limitation.

Described herein is an example of a method and system for providing reciprocating, plunger-style pumps as part of a multi-plunger system for use in hydraulic fracturing operations. Also described are various drive systems for use with the described reciprocating, plunger-style pumps. In various embodiments, the pumps and drive systems may be utilized by conventionally powered (i.e., diesel engine-driven) hydraulic fracturing pumping systems, or in other embodiments by hydraulically powered or electrically powered hydraulic fracturing pumping systems.

5

Multi-plunger hydraulic fracturing pumps, though known in the art, are typically limited to either triplex (three plungers) or quintuplex (five plungers) arrangements. Common hydraulic fracturing pumps often utilize 8-inch, 10-inch, and 11-inch stroke triplex and quintuplex hydraulic fracturing pumps. Hydraulic fracturing pumps are commonly driven by an engine (usually a 2500 horsepower (HP) diesel engine) and a multiple speed transmission, usually having seven speeds or more. However, many of the top gears, depending on the manufacturer and gear ratios, provide speeds that are above the critical speed of a plunger pump. FIG. 4 details calculations of such plunger critical speeds.

For example, one of the most common transmissions utilized in hydraulic fracturing pump applications is the Caterpillar model TH55-E90, which is a 9-speed transmission. As shown in FIG. 5, when this transmission is in 5th gear and the engine is operating at 1700 rpm, the critical speed of 120 rpm on an 8-inch stroke pump is reached. Therefore, running the pump with the transmission in any of gears 6 through 9 could cause pump cavitation and damage accumulation to the fluid end.

Similarly, the common hydraulic fracturing application transmissions known in the art may exhibit the same issues in higher gears, as shown below in FIGS. 6-10. For example, as shown in FIG. 6 and FIG. 7, the critical plunger speed is reached in the 3rd gear, such that use of gears 4-7 may cause cavitation and damage accumulation. Similarly, as shown in FIG. 8 and FIG. 9, the critical plunger speed is reached in the 4th gear, such that use of gears 5-7 may cause cavitation and damage accumulation. In FIG. 10, the critical plunger speed is reached in the 4th gear, such that use of gears 5-9 may result in cavitation and damage accumulation.

Use of the multi-plunger hydraulic fracturing pumps according to the present disclosure may eliminate the need for a diesel engine and transmission. As shown above, diesel engines and transmissions often include multiple gears that accelerate the plunger speed above critical operating speeds. This elimination of the typical engine and transmission from hydraulic fracturing pump units may enable the pumps to be driven by multiple electric motors, according to some embodiments, or multiple hydraulic motors according to other embodiments. These electric or hydraulic motors may have fewer gears such that operation in gears that increase the plunger speeds above their critical speeds can be avoided. By using multiple motors, whether hydraulic or electric, to drive a single pump, pump rates can be increased without exceeding critical plunger speeds.

Use of electric or hydraulic motors, rather than diesel motors, may also make maintenance, repair, and replacement of the electric motors safer and faster than single or double electric motor-driven pumps. This configuration may prevent the fracturing pumps from being run at speeds higher than the critical plunger speed, which may help to minimize pump cavitation and damage accumulation, thus greatly extending the usable life of the pump fluid ends. For example, as discussed in more detail below, the system could be designed to allow only a slight overspeed of the pumps beyond the identified critical pump speed as a safety margin in the event that one of the fleet's pumps were taken offline for repairs or maintenance, and an additional rate of the remaining online pumps were required to complete the stage being pumped.

In the multiple electric motor-driven embodiment of the present disclosure, the electric motors may directly drive the pump, and the gear ratios of the planetary drive along with the electric motor-rated speeds may be chosen to limit the

6

maximum pump speed, so as to not exceed the plunger critical speed. However, the gear ratios and electric motor-rated speeds may also be chosen to allow only a slight percentage of overspeed (higher than critical plunger speed) as a safe margin to enable a fleet of operating pumps to achieve a desired pump rate, for example when one pump is taken off line, as is often the case in hydraulic fracturing. For example, the gear ratios and electric motor-rated speeds may be chosen to operate 5% or less above the critical plunger speed according to some examples; 10% or less above the critical plunger speed according to some examples; or any other acceptable range as will be readily understood by one having ordinary skill in the art. Repairs or maintenance are generally performed as quickly as possible so that the offline pump is available by the next sequential fracturing stage. This same logic could be applied to the hydraulic motor driven system or the system that utilizes speed reduction gearboxes driving a single ring gear.

By the present disclosure, multi-plunger hydraulic fracturing pumps utilizing higher multiples of plungers, such as 7, 9, 11, 13, etc. (septenplex, novenplex, undenplex, tredenplex, etc.), are described. In some embodiments, more than 13 plungers may be utilized, as will be readily understood by one having ordinary skill in the art. In some embodiments, odd numbers of plungers may be chosen so that the pump flow ripple magnitude is minimized. For example, in multi-plunger hydraulic fracturing pumps having higher numbers of plungers, the plunger ripple frequency may be increased, thereby reducing the amount of time between ripples, which may provide a smoother pressure performance for the pumps.

In some embodiments, longer stroke lengths of the plunger pumps may be utilized to reduce plunger speed. For example, a 10-inch stroke pump of a given plunger size may be run at a slower speed than an 8-inch stroke pump of the same plunger size, in order to accomplish the same flow rate. Slowing the plunger down may also decrease the possibility of pump cavitation. For example, when triplex and quintuplex pumps, as are known in the art, are operated at higher rates, conditions for cavitation to occur are measurably higher. According to an embodiment, a critical pump speed may be 120 rpm of the pump crankshaft. With this pump speed, on the currently used 8-inch stroke pumps, the rotational speed translates to an average linear speed of the plungers at a velocity of 32 inches per second. At higher speeds, with every stroke of the plungers, fluid is accelerated into and out of the pump fluid end, creating a likelihood of low pressure regions within the fluid end that approach or dip below vapor pressure values for the fluid, thereby causing cavitation, and ultimately damage accumulation, to occur. The use of longer stroke plungers accordingly contributes critically to longer fluid end life.

Various drive systems for powering multi-plunger hydraulic fracturing pumps are contemplated. According to an embodiment, multiple electric motors may be utilized to power the multi-plunger hydraulic fracturing pump. The number of motors utilized may be selected based on the output hydraulic horsepower for which the pump is designed, in some examples. In other examples, the number of motors could be determined on an "n plus 1" basis, in which "n" number of motors would be adequate to provide enough input power according to the output hydraulic horsepower for which the pump is designed, and one ("1") additional motor would be included to allow for a single motor failure or maintenance situation. In such a situation, the failed motor (or motor purposefully removed for maintenance) could be disconnected from the electrical circuit

and allowed to freewheel, while the remaining operational motors would still provide adequate power for the pump, according to an embodiment.

In the example illustrated in FIG. 1, an exploded schematic view shows an embodiment of a planetary gear train **100** in which the multiple input pinion gears **135** are directly connected to the electric motors **130**. According to the illustrated embodiment, both ends of the pump crankshaft **105** may be powered with an identical planetary gear train **120** and electric motors **130** to enable the motors **130** to be sized small enough to simplify motor removal and installation as compared to a larger single electric motor, or a double electric motor drive system.

In the illustrated embodiment of FIG. 1, eight electric motors **130** may correspond to and drive eight input pinion gears **135** associated with a single main planetary gear **125**. The main planetary gear **125** may in turn drive the sun gear **115** positioned central to three planetary gears **120**. The final drive gear **110** may have internal gear teeth positioned to catch the external gear teeth of the three planetary gears **120**, which may cause rotation of the pump crankshaft **105**. In this way, a plurality of electric motors **130** may provide power to a pump crankshaft **105**, which may in turn drive a multi-plunger pump, for example as illustrated in FIG. 3 and discussed in greater detail below.

In another embodiment, multiple hydraulic motors may be utilized to power a multi-plunger hydraulic fracturing pump, in which a planetary gear train system **100** similar to that illustrated in FIG. 1 could also be utilized. In an example, a planetary gear train system may be utilized on one or both ends of the pump crankshaft to allow for smaller hydraulic motors to be utilized.

According to an alternate embodiment, for example as illustrated in FIG. 2, a plurality of electric motors or hydraulic motors **230** each may be mounted to a plurality of speed reduction gearboxes **245**. FIG. 2 illustrates an exploded schematic example of a planetary gear train **200** having a plurality of speed reduction gearbox **245** mountings for connection to a plurality of electric motors **230**, according to an embodiment. The speed reduction gearboxes **245** may, in turn, power a single ring gear **240** to turn the pump crankshaft **205** at the proper rpm needed to drive the multi-plunger pumps at the desired pump rate. In some examples, this configuration may not require use of a multi-planetary gear train system as described above and illustrated in FIG. 1, for example. For example, as illustrated in the embodiment of FIG. 2, the plurality of electric motors **230** may drive the main planetary gear in the form of a ring gear **240** through speed reduction gearboxes **245**, and the ring gear **240** may directly turn the pump crankshaft **205**. In such an example additional planetary gears **120**, as illustrated in the embodiment of FIG. 1, for example, may not be included.

In an embodiment utilizing multiple electric motors, the fleet of fracturing pumps may be powered by multiple electric motors, and overall electric power may be generated by one or more diesel or gas turbines. When the pumps are being brought online to pump fluids into the well, the power may be switched via appropriate switchgear to the electric motors.

In some embodiments, the speed of the motors may be controlled by one or more variable frequency drives (VFD), which may accelerate or decelerate the pump rotational speeds using an S curve. The pump operator may select the various pump speeds via a human-machine interface (HMI) according to some embodiments, for example from inside a data van, or from a "suitcase," which is a portable, stand-alone HMI. The HMI or suitcase may allow on/off control of

the pumps as well as speed control of the pumps, to allow the pumps to run at speeds from zero crankshaft rpm up to the maximum speed, which would correlate with the plunger critical speed.

According to an embodiment, one of the VFDs may be designated as the master VFD, and the remaining VFDs may be designed to share the load required to power the pump under all load conditions. In the case of an overpressure event, the hydraulic fracturing controls may automatically turn the VFD off using the on/off signal for rapid shutdown, instead of using the rpm command, which uses an S curve to control the acceleration and/or deceleration. A manual emergency shutdown may also be included, which uses an HMI (such as a push button or other HMI, which may be electronic and/or manual) to shut off the VFD using the on/off function. This manual emergency shutdown feature may be configured to shut down all VFDs simultaneously, thereby shutting down the entire site. The emergency shutdown may also be configured to stop the VFD on the blender discharge pumps, and may or may not be tied into the electrical microgrid to open breakers, thereby stopping the flow and/or generation of electricity and/or gas compression.

The HMI may be designed to allow only a slight percentage of overspeed (higher than critical plunger speed) as a safe margin to enable a fleet of operating pumps to achieve a desired pump rate when one pump is taken offline, for example, as is often the case in hydraulic fracturing. Repairs or maintenance are generally performed as quickly as possible so that the offline pump is available by the next sequential fracturing stage. This same logic could be applied to the hydraulic motor driven system or the system that utilizes speed reduction gearboxes driving a single ring gear.

FIG. 3 illustrates a schematic example of a multi-plunger pump **300** with four electric motors mounted to the pump for driving the multi-plunger pump, according to an embodiment. In the illustrated embodiment, the multi-plunger pump **300** may include nine plungers positioned at the multi-plunger fluid end **350** of the multi-plunger pump **300**. In other embodiments, various other numbers of plungers may be included, as will be readily understood by one having ordinary skill in the art.

A crankshaft centerline **360** may bisect the multi-plunger pump **300** between the multi-plunger fluid end **350** and the pump power end **355**. Two electric motors **330** may be positioned on opposing sides of the multi-plunger pump **300**, across the crankshaft centerline **360**. The four total electric motors **330** may drive the crankshaft associated with the nine plungers, as described above with respect to FIGS. 1 and 2. For example, in some embodiments the four electric motors **330** may drive the crankshaft via one or more planetary gear trains. In some embodiments, a plurality of speed reduction gearboxes may be positioned between the electric motors **330** and the one or more planetary gear trains so as to control the rotational speed of the one or more planetary gear trains and, ultimately, the pump rate of the plungers.

The present invention described herein, therefore, is well adapted to carry out the objects and attain the ends and advantages mentioned, as well as others inherent therein. While a presently preferred embodiment of the invention has been given for purposes of disclosure, numerous changes exist in the details of procedures for accomplishing the desired results. These and other similar modifications will readily suggest themselves to those skilled in the art, and are intended to be encompassed within the spirit of the present invention disclosed herein and the scope of the appended claims.

What is claimed is:

1. A hydraulic fracturing system for fracturing a subterranean formation comprising:

a multi-plunger hydraulic fracturing pump fluidly connected to a well associated with the subterranean formation, the multi-plunger pump configured to pump fluid into a wellbore associated with the well at a high pressure so that the fluid passes from the wellbore into the subterranean formation and fractures the subterranean formation;

a plurality of motors positioned to simultaneously power the multi-plunger pump; and

a planetary gear train having a plurality of input pinion gears in rotational contact with each of the plurality of motors,

wherein a gear ratio of the planetary gear train and a speed at which the plurality of motors operates are selected so as to limit a maximum pump speed associated with the multi-plunger pump.

2. The system of claim 1, the system further comprising a plurality of speed reduction gearboxes positioned between the plurality of input pinion gears and the plurality of motors so as to achieve a desired pump rate.

3. The system of claim 1, wherein the plurality of motors comprises one of a plurality of electric motors or a plurality of hydraulic motors.

4. The system of claim 1, wherein the maximum pump speed correlates to a critical plunger speed associated with the multi-plunger hydraulic fracturing pump.

5. The system of claim 1, wherein the maximum pump speed is 5% or less over a critical plunger speed associated with the multi-plunger hydraulic fracturing pump.

6. The system of claim 1, wherein the multi-plunger hydraulic fracturing pump comprises an odd number of plungers greater than or equal to five plungers.

7. The system of claim 6, wherein a stroke length of each of the plungers associated with the multi-plunger hydraulic fracturing pump is selected to inversely relate to a pump speed associated with the multi-plunger hydraulic fracturing pump so as to achieve a predetermined flow rate.

8. The system of claim 1, further comprising:

a variable frequency drive (VFD) connected to the plurality of motors to control the speed of the plurality of motors, wherein the VFD is positioned to accelerate or decelerate pump rotational speeds associated with the multi-plunger hydraulic fracturing pump.

9. The system of claim 8, wherein the VFD comprises a plurality of VFDs and wherein the plurality of VFDs are configured to share a load required to power the multi-plunger hydraulic fracturing pump.

10. The system of claim 9, wherein the plurality of VFDs are configured to automatically shut off in the event of an overpressure event with respect to the multi-plunger hydraulic fracturing pump.

11. A hydraulic fracturing system for fracturing a subterranean formation comprising:

a multi-plunger hydraulic fracturing pump fluidly connected to a well associated with the subterranean formation, the multi-plunger pump configured to pump fluid into a wellbore associated with the well at a high pressure so that the fluid passes from the wellbore into the subterranean formation and fractures the subterranean formation;

a plurality of motors positioned to simultaneously power the multi-plunger pump;

a variable frequency drive connected to the plurality of motors to control the speeds of the plurality of motors; and

a planetary gear train having a plurality of input pinion gears in rotational contact with each of the plurality of motors,

wherein a gear ratio of the planetary gear train and a speed at which the plurality of motors operates are selected so as to limit a maximum pump speed associated with the multi-plunger pump.

12. The system of claim 11, the system further comprising a plurality of speed reduction gearboxes positioned between the plurality of input pinion gears and the plurality of motors so as to achieve a desired pump rate.

13. The system of claim 11, wherein the plurality of motors comprises one of a plurality of electric motors or a plurality of hydraulic motors.

14. The system of claim 11, wherein the maximum pump speed correlates to a critical plunger speed associated with the multi-plunger hydraulic fracturing pump.

15. A method for pumping fluid into a wellbore associated with a subterranean formation, the method comprising:

fluidly connecting a multi-plunger hydraulic fracturing pump to a well associated with the subterranean formation such that the multi-plunger pump pumps fluid into the wellbore at a high pressure so that fluid passes from the wellbore into the subterranean formation and fractures the subterranean formation;

simultaneously powering the multi-plunger pump with a plurality of motors;

providing a planetary gear train having a plurality of input pinion gears in rotational contact with each of the plurality of motors so as to translate power from the plurality of motors into a desired pump rate of the multi-plunger pump.

16. The method of claim 15, further comprising:

positioning a plurality of speed reduction gearboxes between the plurality of input pinion gears and the plurality of motors so as to achieve the desired pump rate.

17. The method of claim 15, wherein the plurality of motors comprises one of a plurality of electric motors or a plurality of hydraulic motors.

18. The method of claim 15, wherein the maximum pump speed correlates to a critical plunger speed associated with the multi-plunger hydraulic fracturing pump.

19. The method of claim 15, further comprising:

connecting a variable frequency drive (VFD) to the plurality of motors so as to control the speed of the plurality of motors, wherein the VFD is positioned to accelerate or decelerate pump rotational speeds associated with the multi-plunger hydraulic fracturing pump.

20. The method of claim 19, the method further comprising:

detecting an overpressure event with respect to the multi-plunger hydraulic fracturing pump; and automatically shutting off the VFD.

* * * * *