



US008264003B2

(12) **United States Patent**
Herman

(10) **Patent No.:** **US 8,264,003 B2**
(45) **Date of Patent:** **Sep. 11, 2012**

(54) **MERGED CASCODE TRANSISTOR**

(75) Inventor: **Thomas Herman**, Manhattan Beach, CA (US)

(73) Assignee: **International Rectifier Corporation**, El Segundo, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/688,338**

(22) Filed: **Mar. 20, 2007**

(65) **Prior Publication Data**

US 2007/0215899 A1 Sep. 20, 2007

Related U.S. Application Data

(60) Provisional application No. 60/783,934, filed on Mar. 20, 2006.

(51) **Int. Cl.**
H01L 29/66 (2006.01)

(52) **U.S. Cl.** **257/194**; 257/E29.246

(58) **Field of Classification Search** 257/192,
257/194, 195, E29.14, E29.144, E29.246,
257/E29.249

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,903,383	B2 *	6/2005	Yokogawa et al.	257/192
7,052,942	B1 *	5/2006	Smart et al.	438/162
2004/0188761	A1 *	9/2004	Koyama	257/348
2005/0051796	A1 *	3/2005	Parikh et al.	257/192
2005/0189561	A1 *	9/2005	Kinzer et al.	257/192
2006/0060871	A1 *	3/2006	Beach	257/94

FOREIGN PATENT DOCUMENTS

JP	2001-210657	8/2001
JP	2002-076020	3/2002
JP	2008-522436	6/2008
WO	WO 2005/079370	9/2005

OTHER PUBLICATIONS

Tietze, et al., *Halbleiter-Schaltungstechnik*, 12. Auflage, Berlin: Springer, 2002, pp. 316-317.

* cited by examiner

Primary Examiner — Victor A Mandala

Assistant Examiner — Selim Ahmed

(74) *Attorney, Agent, or Firm* — Farjami & Farjami LLP

(57) **ABSTRACT**

A merged gate transistor in accordance with an embodiment of the present invention includes a semiconductor element, a supply electrode electrically connected to a top surface of the semiconductor element, drain electrode electrically connected to the top surface of the semiconductor element and spaced laterally away from the supply electrode, a first gate positioned between the supply electrode and the drain electrode and capacitively coupled to the semiconductor element to form a first portion of the transistor and a second gate positioned adjacent to the first gate, and between the supply electrode and the drain electrode to form a second portion of the transistor, wherein the second gate is also capacitively coupled to the semiconductor element. The first gate is connected to an input voltage signal such that conduction of the first portion is based on a value of the input voltage signal and the second gate is connected to a predetermined constant voltage such that the second portion of the transistor conducts until a voltage difference between the predetermined constant voltage and a voltage at the source electrode reaches a predetermined level.

16 Claims, 4 Drawing Sheets

40

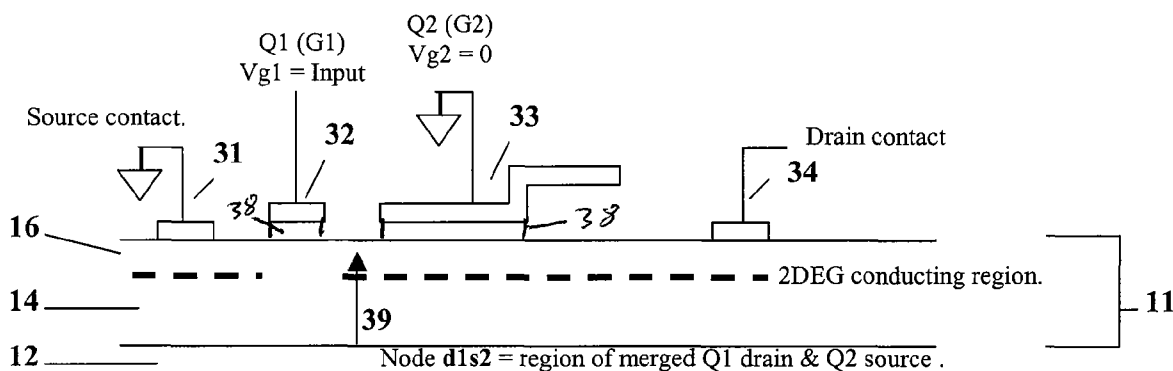


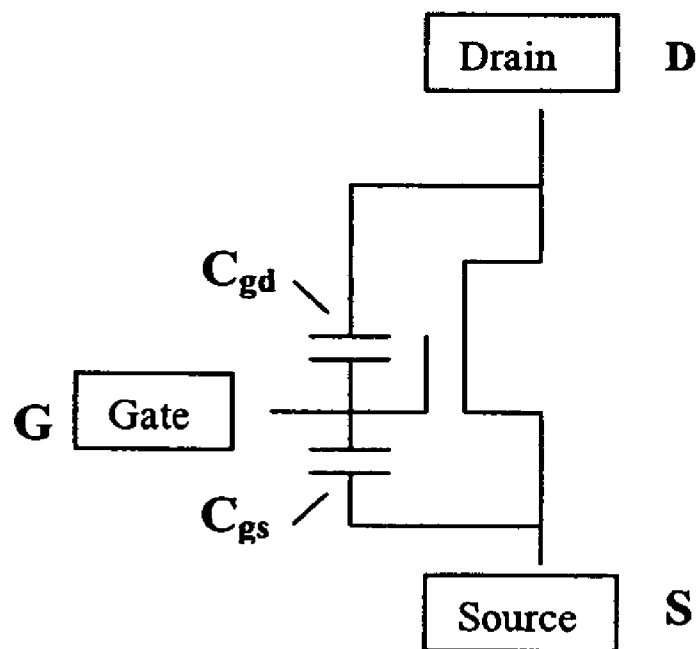
Fig. 1**10****PRIOR ART**

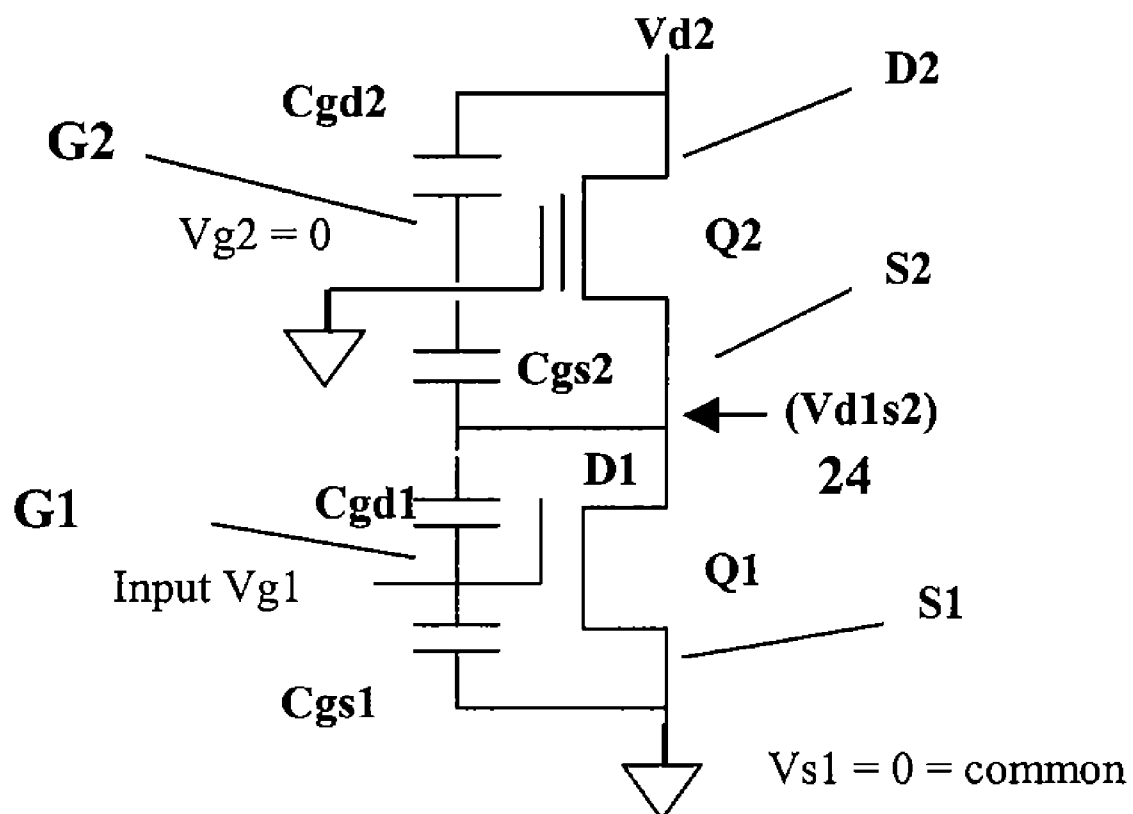
Fig. 2

Fig. 3

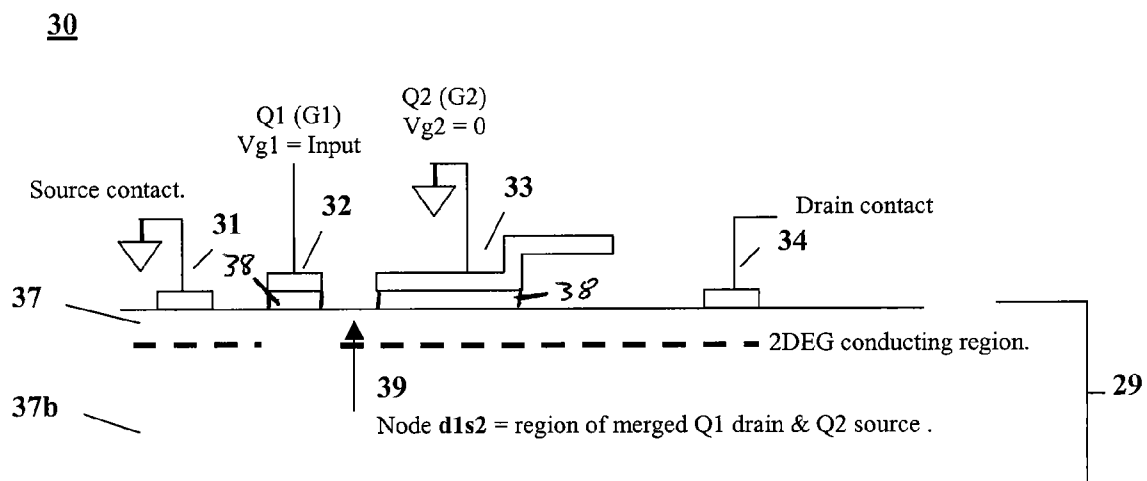
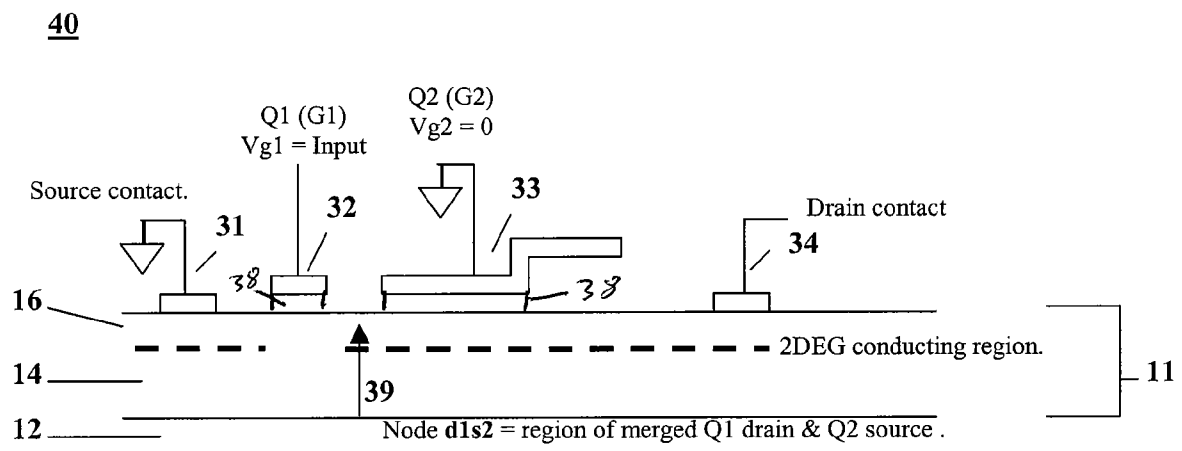


Fig. 4



1

MERGED CASCODE TRANSISTOR**CROSS-REFERENCE TO RELATED APPLICATIONS**

The present application claims benefit of and priority to U.S. Provisional Application Ser. No. 60/783,934, filed on Mar. 20, 2006, entitled MERGED CASCODE TRANSISTOR (III-NITRIDE, COMPOUND, OR SILICON SEMICONDUCTOR) FOR LOW Q_g, FAST SWITCHING AND HIGH VOLTAGE, the entire contents of which are hereby incorporated by reference herein.

The present application is also related to U.S. patent application Ser. No. 11/345,753 entitled III-NITRIDE INTEGRATED SCHOTTKY AND POWER DEVICE filed Feb. 2, 2006, which claims benefit of and priority to U.S. Provisional Patent Application Ser. No. 60/649,393 entitled GaN MONOLITHIC FETKY SYNCHRONOUS RECTIFIER FOR BOOST DIODE filed Feb. 2, 2005, the entire contents of both of which are hereby incorporate by reference herein.

BACKGROUND OF THE INVENTION

The present invention relates to a transistor for use in high voltage, high speed switching applications. More specifically, the present application relates to a merged gate transistor that is useful for high voltage, high speed applications.

FIG. 1 illustrates a schematic representation of a conventional field effect transistor (FET) 1. The FET 1 includes a drain D, a source S and a gate G to control current flow between the drain and the source. When FETs, like FET 1 in FIG. 1 are used in used in large switching applications, for example, in DC-DC power converters, low gate charge/capacitance and low gate-drain capacitance are important parameters in providing high frequency and high efficiency. Large drain-source voltage (V_{ds}) swings during switching create a large "Miller effect" and as a result, excessive switching losses.

In addition, high dV/dt changes at the drain (D) may result in a voltage transient VG1 at the gate (G). The magnitude of the transient VG1 is proportional to the ratio of the gate-drain capacitance (C_{gd}) to the gate-source capacitance (C_{gs}) C_{gd}/C_{gs}. As a result, the transient VG1 may turn the transistor 1 ON briefly when not desired. This unwanted period of conduction may result in rather large power and efficiency losses. These problems are common in all FET devices whether they are silicon, non-silicon or IEMT devices.

Accordingly, it would be desirable to provide a transistor suitable for use in high voltage, high speed switching applications that avoids the problems discussed above.

SUMMARY OF THE INVENTION

A merged gate transistor in accordance with an embodiment of the present invention includes a semiconductor element, a supply electrode electrically connected to a top surface of the semiconductor element, drain electrode electrically connected to the top surface of the semiconductor element and spaced laterally away from the supply electrode, a first gate positioned between the supply electrode and the drain electrode and capacitively coupled to the semiconductor element to form a first portion of the transistor and a second gate positioned adjacent to the first gate, and between the supply electrode and the drain electrode to form a second portion of the transistor, wherein the second gate is also capacitively coupled to the semiconductor element. The first gate is connected to an input voltage signal such that conduc-

2

tion of the first portion is based on a value of the input voltage signal and the second gate is connected to a predetermined constant voltage such that the second portion of the transistor conducts until a voltage difference between the predetermined constant voltage and a voltage at the source electrode reaches a predetermined level.

A merged cascode high electron mobility transistor in accordance with an embodiment of the present invention includes a first epitaxial layer of III-Nitride material, a second epitaxial layer of a III-Nitride material, positioned on top of said first epitaxial layer such that a 2 dimensional electron gas conducting layer is formed between the first and second epitaxial layers, a supply electrode electrically connected to the first epitaxial layer, a drain electrode electrically connected to the first epitaxial layer and spaced laterally from the supply electrode, a first gate positioned between the supply electrode and the drain electrode and capacitively coupled to the first epitaxial layer to form a first portion of the transistor and a second gate positioned adjacent to the first gate, and between the drain electrode and the supply electrode and capacitively coupled to the first epitaxial layer to form a second portion of the transistor. The first gate is connected to an input voltage signal such that conduction of the first portion is based on a value of the input voltage signal and the second gate is connected to a predetermined constant voltage such that the second portion of the transistor conducts until a voltage difference between the predetermined constant voltage and a voltage at the source electrode reaches a predetermined level.

Embodiments and advantages of the present invention will become apparent from the following description of the invention which refers to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a schematic view of a conventional FET. FIG. 2 illustrates a merged gate transistor in accordance with an embodiment of the present invention.

FIG. 3 illustrates an operative configuration for a transistor device in accordance with an embodiment of the present invention.

FIG. 4 illustrates an operative configuration for a transistor device in accordance with another embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

A transistor 20 suitable for use in high voltage, high speed switching applications in accordance with an embodiment of the present invention is described with reference to FIG. 2. A single FET 20 with two merged gates 22, 22¹ is illustrated in FIG. 2. That is, the FET 20 of FIG. 2 is a single device and not two separate FETs.

The top portion Q2 is in depletion mode, that is, normally ON with a depletion pinchoff voltage V_{p2}. The gate voltage V_{g2} at the gate 22¹ of the top portion Q2 is set to 0, as illustrated. However, depending on the specific application, the gate voltage V_{g2} may be set at any desired value.

The bottom portion Q1 of FET 20 is preferably in enhancement mode, that is, normally OFF, with an enhancement threshold voltage V_{t1}. An input voltage signal is preferably connected to the gate 22 to provide the gate voltage V_{g1} at the gate 22 of the bottom portion Q1.

In operation, when the input voltage signal provides a high voltage at V_{g1}, the bottom portion Q1 is conducting. That is, the level of the input voltage signal is sufficiently high such that the enhancement threshold voltage V_{t1} is met or

3

exceeded and conduction occurs. The voltage at the node **24** (V_{ds2}) at this time is low, substantially 0V. As noted above, the voltage at the gate **22**¹ (V_{g2}) is set to 0, and thus, the gate-source voltage of the top portion **Q2** is approximately 0V, as well. Since the top portion **Q2** is in depletion mode, **Q2** is fully ON and is fully conducting. Thus, both the top and bottom portions **Q1**, **Q2** of device **20** are both ON and conducting. Further, the voltage at the drain (V_{d2}) of portion **Q2** is close to 0 as well.

When the input voltage at V_{g1} and provided to the gate **22** of the bottom portion **Q1** (V_{g1}) goes low, the bottom portion **Q1** turns OFF and the bottom portion **Q2** stops conducting. As a result, the voltage at the node **24** (V_{ds2}) rises until the gate-source voltage (V_{gs}) of the top portion **Q2** reaches the pinch off voltage V_{p2} and the top portion **Q2** turns OFF. Thereafter, the drain voltage V_{d2} of the top portion **Q1** rises to the full supply voltage.

Thus, in the device **20**, the voltage at node **24** (V_{ds2}) never rises above the magnitude of the pinchoff voltage V_{p2} . The pinchoff voltage V_{p2} is preferably set low, on the order of a few volts and is typically much lower than the peak drain voltage V_{d2} , or supply voltage, which is generally 10s-100s of volts.

As a result, the drain swing of the bottom portion **Q1** is substantially reduced, that is, a swing of only a few volts. This is a much smaller swing than would occur if a single FET were used alone as a switching device. As a result, **Q1** need only be optimized for ultra-low voltage operation.

The FET **20** of the present invention offers several advantages. First, the "Miller effect" is greatly reduced, and thus power losses are also substantially reduced as well. The dV/dt at the drain (**D1**) of the bottom portion **Q1** is also reduced, and thus, the capacitively coupled voltage transient V_{G1} is also reduced. As a result, the danger of shoot through is also substantially reduced. Further, since **Q1** can be optimized for ultra-low voltage operation, short gate lengths (L_g) can be used which further reduce the overall gate charge of **Q1** and improve switching performance. Since **Q1** never has a high voltage on its drain (**D1**), **Q1**'s gate does not need field plating which also reduces its capacitance. **Q2** can be optimized for stable higher voltage operation, for example by field plating the gate. Ordinarily field plating the gate creates higher gate drain charge and high gate drain capacitance, however, since the gate **G2** is grounded, any capacitively coupled shoot through voltage transient at **G2** is relatively harmless such that unwanted conduction in the top portion **Q2** is unlikely. While the configuration of FIG. 2 may lead to higher static R_{dson} , or DC conduction losses, the overall improved lower R_Q figure of merit will result in lower overall power losses and higher efficiency.

FIG. 3 illustrates an exemplary embodiment of a transistor **30** in accordance with an embodiment of the present invention preferably implemented as a high electron mobility transistor (IEMT). Specifically, FIG. 3 illustrated a merged cascode BEMT **30** in accordance with an embodiment of the present invention that may be fabricated with insulated gates and a semiconductor element **29** including two III-Nitride epitaxial layers (**37**, **37b**) with a 2DEG conducting layer (**28**) at the interface of the epitaxial layers (**37**, **37b**).

Generally, in the BEMT **30** of FIG. 3, the first (or bottom) portion **Q1** is in enhancement mode such that the 2DEG is typically not present under the gate **G1** when $V_{g1}=0$, as illustrated. This may be accomplished by using a recessed gate, fluorine implants or any other suitable means. As illustrated, a source contact **31** is positioned on a top surface of a semiconductor element **29**, which may include the first epitaxial layer **37**. The gates **G1**, **G2** (**32**, **33**) are position adja-

4

cent to the source contact **31** and are separated from the top surface of the first epitaxial layer **37** by an insulating layer **38**. A drain contact **34** is positioned on the other side of the gates **32**, **33** on the top surface of the first epitaxial layer **37**. The node **24** of FIG. 2 is represented by the arrow **39** in the area of the merged **Q1** drain and **Q2** source. That is, on the drain side of the gate **32** (**G1**) of the first portion **Q1** and on the source side of the gate **33** (**G2**) of the second portion.

While specifically illustrated as an IEMT device in FIG. 3, it is noted that the first and second portions **Q1**, **Q2** of the FET **20** may be fabricated using silicon, III-Nitride or may be a compound semiconductor, if desired. While the top portion **Q2** is described as being in depletion mode and the bottom portion **Q1** is described as being in enhancement mode, **Q1** and **Q2** may be in either depletion mode or in enhancement mode. Alternatively, both the first and second portion **Q1**, **Q2** may be in the same mode, if desired.

The first and second portions **Q1**, **Q2** may include insulated gates, schottky gates, or junction gates. Further, the polarity of the conducting channel may be either N-type or P-type. The voltage V_{g2} at the gate **33** (**G2**) of portion **Q2** may be set at some non-zero value, if desired, as is mentioned above.

The device of FIG. 3 may include a III-nitride base heterojunction **10** disposed over a support body **12**. FIG. 4 illustrates this embodiment and common reference numbers refer to common elements. The transistor **40** of FIG. 4 is similar to the switching device described in U.S. patent application Ser. No. 11/345,753, mentioned above. Heterojunction **11** includes a first III-nitride semiconductor body **14**, and a second III-nitride semiconductor body **16** over first III-nitride semiconductor body **14**. A first power electrode **31** (i.e. source electrode) and a second power electrode **34** (i.e. drain electrode) are electrically connected to second III-nitride semiconductor body **16** through a direct ohmic connection or any other suitable means. Two gate structures **32**, **33** are disposed between electrodes **31**, **34** over second III-nitride semiconductor body **16**. In the preferred embodiment of the present invention, the gates **32**, **33** are capacitively connected, or coupled, to second III-nitride semiconductor layer **16** through an insulating layer **38**, for example. Alternatively, gate structures **32**, **33** may include a schottky gate electrode connected to second III-nitride semiconductor body **16**.

In a device according to any one of the embodiments of the present invention, the first III-nitride semiconductor body is preferably an alloy from the InAlGa_N system, such as GaN, and the second III-nitride semiconductor body **16** is another alloy from the InAlGa_N system having a band gap that is different from that of first III-nitride semiconductor **14**, whereby a two-dimensional electron gas (2DEG) is formed due to the heterojunction of the first and the second III-nitride semiconductor bodies as is well known in the art. For example, the second III-nitride semiconductor body may be formed with AlGa_N. However, other materials may be used if desired.

In addition, support body **12** may be a combination of a substrate material, and if required, a buffer layer (not shown) on the substrate to compensate for the lattice and thermal mismatch between the substrate and first III-nitride semiconductor body **14**. For economic reasons, the preferred material for the substrate is silicon. Other substrate materials such as sapphire, and SiC can also be used without deviating from the scope and the spirit of the present invention.

AlN is a preferred material for a buffer layer, if necessary. However, a multi-layer or graded transitional III-nitride semiconductor body may also be used as a buffer layer without deviating from the scope and the spirit of the present invention.

5

It is also possible to have the substrate made from the same material as first III-nitride semiconductor body and thus avoid the need for a buffer layer. For example, a GaN substrate may be used when first III-nitride semiconductor body **14** is formed with GaN.

The gate electrodes **32**, **33** may be composed of n type or p type silicon, or polysilicon of any desired conductivity, or TiW, aluminum, Ti/Al, refractory silicides, or other metallic layer. Ohmic electrodes **31**, **34** may be composed of Ti/Al and may further include other metallic bodies over the top surface thereof such as Ti/TiW, Ni/Au, Mo/Au, or the like. Any other metal system that makes low resistance contact to the 2DEG may be employed. Gate insulating layer **38** may be composed of SiN, Al₂O₃, SiO₂, HfO, MgO, Sc₂O₃, or the like. Schottky metal for schottky electrode **26** may include nickel, platinum, palladium, silicides of those metals, or any other metal with sufficient barrier height to keep leakage low.

Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims.

What is claimed is:

1. A merged cascode transistor circuit comprising:
 - an input voltage signal source having an input voltage signal;
 - a constant voltage source having a predetermined constant voltage;
 - a merged cascode transistor comprising:
 - a semiconductor element;
 - a source electrode electrically connected to a top surface of the semiconductor element;
 - a drain electrode electrically connected to the top surface of the semiconductor element and spaced laterally away from the source electrode;
 - a first gate positioned between the source electrode and the drain electrode and coupled to the semiconductor element to form a first portion of the transistor; and
 - a second gate positioned adjacent to the first gate, and between the source electrode and the drain electrode to form a second portion of the transistor, wherein the second gate includes a field plate and is also coupled to the semiconductor element;
 - wherein the first gate is connected to the input voltage signal source such that conduction of the first portion of the transistor is based on a value of the input voltage signal and the second gate is connected to the constant voltage source such that the second portion of the transistor conducts until a voltage difference between the predetermined constant voltage and a voltage at a node in the semiconductor element between the first portion and the second portion of the transistor reaches a predetermined level, wherein the first portion of the transistor is an enhancement mode transistor and the second portion of the transistor is a depletion mode transistor, and wherein a drain region of the enhancement mode transistor is merged with a source region of the depletion mode transistor at the node in the semiconductor element.
2. The merged cascode transistor of claim 1, wherein the semiconductor element further comprises:
 - a first III-Nitride layer; and
 - a second III-Nitride layer on which the first III-Nitride layer is positioned such that a 2DEG conduction layer forms between the first and second III-Nitride layers,

6

wherein the source electrode and the drain electrode are ohmically connected to the first III-Nitride layer.

3. The merged cascode transistor of claim 2, further comprising an insulating layer positioned between the first and second gates and the first III-Nitride layer such that the first and second gates are capacitively coupled to the first III-Nitride layer.

4. The merged cascode transistor of claim 3, wherein the first III-Nitride layer comprises AlGaN material and the second III-Nitride layer comprises GaN material.

5. The merged cascode transistor of claim 4, further comprising an insulating layer positioned between the first and second gates and the first III-Nitride layer such that the first and second gates are capacitively coupled to the first III-Nitride layer.

6. The merged cascode transistor of claim 5, wherein the first portion of the transistor conducts when the input voltage signal provides an input voltage above a predetermined threshold voltage.

7. The merged cascode transistor of claim 6, where in the predetermined level is a pinch off voltage of the second portion of the transistor.

8. The merged cascode transistor of claim 7, wherein the insulation layer is comprised of silicon dioxide.

9. The merged cascode transistor of claim 8, wherein the insulation layer is comprised of silicon nitride.

10. A merged cascode high electron mobility transistor circuit comprises:

- an input voltage signal source having an input voltage signal;
- a constant voltage source having a predetermined constant voltage;
- a merged cascode transistor comprising:
 - a first epitaxial layer of III-Nitride material;
 - a second epitaxial layer of a III-Nitride material in contact with the first epitaxial layer such that a 2-dimensional electron gas conducting layer is formed between the first and second epitaxial layers;
 - a source electrode electrically connected to the first epitaxial layer;
 - a drain electrode electrically connected to the first epitaxial layer and spaced laterally from the source electrode;
 - a first gate positioned between the source electrode and the drain electrode and coupled to the first epitaxial layer to form a first portion of the transistor; and
 - a second gate, including a field plate, positioned adjacent to the first gate, and between the drain electrode and source electrode and coupled to the first epitaxial layer to form a second portion of the transistor;
- wherein the first gate is connected to the input voltage signal source such that conduction of the first portion is based on a value of the input voltage signal and the second gate is connected to the constant voltage source such that the second portion of the transistor conducts until a voltage difference between the predetermined constant voltage and a voltage at a node in the semiconductor element between the first portion and the second portion of the transistor reaches a predetermined level, wherein the first portion of the transistor is an enhancement mode transistor and the second portion of the transistor is a depletion mode transistor, and wherein a drain region of the enhancement mode transistor is merged with a source region of the depletion mode transistor at the node in the semiconductor element.

7

11. The merged cascode high electron mobility transistor of claim 10, further comprising an insulating layer positioned between the first and second gates and the first epitaxial layer.

12. The merged cascode high electron mobility transistor of claim 11, wherein the first epitaxial layer comprises an AlGaN material and the second epitaxial layer comprises a GaN material.

13. The merged cascode high electron mobility transistor of claim 12, wherein first portion of the transistor conducts when the input voltage signal provides an input voltage above a predetermined threshold voltage.

8

14. The merged cascode high electron mobility transistor of claim 13, wherein the predetermined level is a pinch off voltage of the second portion of the transistor.

15. The merged cascode high electron mobility transistor of claim 14, wherein the insulating layer is comprised of silicon dioxide.

16. The merged cascode high electron mobility transistor of claim 14, wherein the insulating layer is comprised of silicon nitride.

* * * * *