US012130900B2

(12) **United States Patent**
Tussy

(10) **Patent No.: US 12,130,900 B2**
(45) **Date of Patent: *Oct. 29, 2024**

(54) **METHOD AND APPARATUS TO DYNAMICALLY CONTROL FACIAL ILLUMINATION**

(71) Applicant: **FaceTec, Inc.**, Las Vegas, NV (US)

(72) Inventor: **Kevin Alan Tussy**, Las Vegas, NV (US)

(73) Assignee: **FaceTec, Inc.**, Las Vegas, NV (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/142,529**

(22) Filed: **May 2, 2023**

(65) **Prior Publication Data**

US 2023/0394127 A1 Dec. 7, 2023

Related U.S. Application Data

(63) Continuation of application No. 16/428,857, filed on May 31, 2019, now Pat. No. 11,657,132, which is a (Continued)

(51) **Int. Cl.**
G06F 21/32 (2013.01)
G06F 21/34 (2013.01)
(Continued)

(52) **U.S. Cl.**
CPC ***G06F 21/32*** (2013.01); ***G06F 21/34*** (2013.01); ***G06Q 20/3276*** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC G06F 21/32; G06F 21/34; H04W 12/065; H04W 12/06; G06V 40/172; G06V 40/50; G06Q 20/40145
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,031,228 A 7/1991 Lu
5,699,449 A 12/1997 Javidi
(Continued)

FOREIGN PATENT DOCUMENTS

CA 3075573 1/2013
CN 103593594 2013 2/2014
(Continued)


OTHER PUBLICATIONS

After Effects Tutorial—17—Introduction to Masking, by thenewboston, uploaded Dec. 7, 2008, youtube.com [online], [retrieved Jun. 15, 2017]. Available from <URL:https://www.youtube.com/watch?v=kWd51xDqz1c>.
(Continued)

Primary Examiner — Shanto Abedin
(74) *Attorney, Agent, or Firm* — Weide & Miller, Ltd.

(57) **ABSTRACT**

Systems and methods for authenticating a user in an authentication system using a computing device configured to capture authentication biometric identity information. The authentication biometric identify information captured during an authentication session. The authentication biometric identify information may comprise or be derived from one or more images of the user being authenticated. The authentication biometric identify information is compared to root identify biometric information. The root identify biometric information is captured from a trusted source, such as trusted devices located at trusted locations, such as a government entity, financial institution, or business. Identity verification may occur by comparing the trusted root identify biometric information to the biometric identify information captured during an authentication session. Liveness determination may also occur to verify the user is a live person. Liveness determination may include comparing two images of the
(Continued)

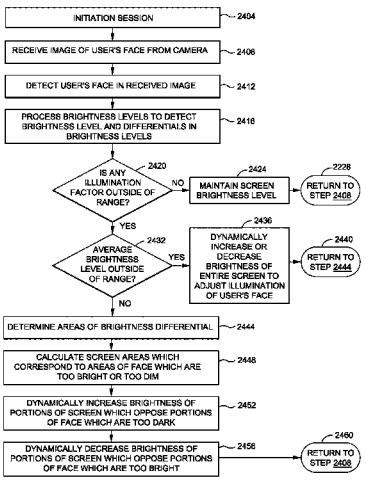

user such that the two images are captured at different distances from the user.

18 Claims, 23 Drawing Sheets

Related U.S. Application Data

continuation-in-part of application No. 15/934,105, filed on Mar. 23, 2018, now Pat. No. 10,262,126, and a continuation-in-part of application No. 15/900,681, filed on Feb. 20, 2018, now Pat. No. 10,614,204, said application No. 15/934,105 is a continuation of application No. 14/839,505, filed on Aug. 28, 2015, now Pat. No. 9,953,149, said application No. 15/900,681 is a continuation of application No. 14/839,505, filed on Aug. 28, 2015, now Pat. No. 9,953,149, said application No. 16/428,857 is a continuation-in-part of application No. 16/256,955, filed on Jan. 24, 2019, now Pat. No. 10,698,995, which is a continuation-in-part of application No. 15/934,105, filed on Mar. 23, 2018, now Pat. No. 10,262,126, said application No. 16/428,857 is a continuation-in-part of application No. 16/256,974, filed on Jan. 24, 2019, now Pat. No. 10,915,618.

(60) Provisional application No. 62/621,504, filed on Jan. 24, 2018, provisional application No. 62/621,493, filed on Jan. 24, 2018, provisional application No. 62/621,471, filed on Jan. 24, 2018, provisional application No. 62/460,670, filed on Feb. 17, 2017, provisional application No. 62/188,584, filed on Jul. 3, 2015, provisional application No. 62/139,558, filed on Mar. 27, 2015, provisional application No. 62/101,317, filed on Jan. 8, 2015, provisional application No. 62/085,963, filed on Dec. 1, 2014, provisional application No. 62/064,415, filed on Oct. 15, 2014, provisional application No. 62/054,847, filed on Sep. 24, 2014, provisional application No. 62/043,224, filed on Aug. 28, 2014.

(51) **Int. Cl.**

G06Q 20/32	(2012.01)
G06Q 20/40	(2012.01)
G06V 10/10	(2022.01)
G06V 40/16	(2022.01)
G06V 40/50	(2022.01)
G06V 40/60	(2022.01)
G06V 40/70	(2022.01)
H04W 12/06	(2021.01)
H04W 12/065	(2021.01)
H04W 12/65	(2021.01)
H04W 12/68	(2021.01)
H04W 88/02	(2009.01)
G06V 40/20	(2022.01)
H04L 9/40	(2022.01)

(52) **U.S. Cl.**

CPC ***G06Q 20/40145*** (2013.01); ***G06V 10/17*** (2022.01); ***G06V 40/166*** (2022.01); ***G06V 40/172*** (2022.01); ***G06V 40/50*** (2022.01); ***G06V 40/67*** (2022.01); ***G06V 40/70*** (2022.01); ***H04W 12/06*** (2013.01); ***H04W 12/065*** (2021.01); *G06V 40/20* (2022.01); *H04L 63/0861* (2013.01); *H04W 12/65* (2021.01); *H04W 12/68* (2021.01); *H04W 88/02* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,781,650	A	7/1998	Lobo et al.
5,784,056	A	7/1998	Nielsen
5,835,616	A	11/1998	Lobo et al.
5,842,194	A	11/1998	Arbuckle
5,850,470	A	12/1998	Kung et al.
5,956,122	A	9/1999	Doster
5,982,912	A	11/1999	Fukui et al.
6,134,339	A	10/2000	Luo
6,173,068	B1	1/2001	Prokoski
6,212,030	B1	4/2001	Koriyama et al.
6,246,779	B1	6/2001	Fukui et al.
6,301,370	B1	10/2001	Steffens et al.
6,310,601	B1	10/2001	Moore et al.
6,389,176	B1	5/2002	Hsu et al.
6,461,807	B1	10/2002	Friend et al.
D485,279	S	1/2004	DeCombe
6,678,664	B1	1/2004	Ganesan
6,687,390	B2	2/2004	Avni et al.
6,697,502	B2	2/2004	Luo
6,711,584	B1	3/2004	Wajda et al.
6,728,401	B1	4/2004	Hardeberg
6,775,397	B1	8/2004	Hamalainen
6,840,149	B2	1/2005	Beal
6,961,361	B1	11/2005	Tanaka
7,003,135	B2	2/2006	Hsieh et al.
7,211,138	B2	5/2007	Yamamoto e et al.
7,218,774	B2	5/2007	Liu
7,231,657	B2	6/2007	Honarvar et al.
7,289,648	B2	10/2007	Liu
7,308,581	B1	12/2007	Geosimonian
7,333,963	B2	2/2008	Widrow et al.
7,415,152	B2	8/2008	Jiang et al.
7,428,320	B2	9/2008	Northcott et al.
7,519,200	B2	4/2009	Gokturk et al.
D596,192	S	7/2009	Shotel
D601,582	S	10/2009	Chaudhri
D606,082	S	12/2009	Parker
7,636,450	B1	12/2009	Bourdev
7,646,909	B2	1/2010	Jiang et al.
7,660,444	B2	2/2010	Hamalainen
7,710,693	B2	5/2010	Guzman-Casillas et al.
7,783,118	B2	8/2010	Zhou
7,788,247	B2	8/2010	Wang et al.
7,804,982	B2	9/2010	Howard et al.
D625,325	S	10/2010	Vu
7,809,722	B2	10/2010	Gokturk et al.
D637,604	S	5/2011	Brinda
7,945,653	B2	5/2011	Zuckerberg et al.
D640,277	S	6/2011	Woo
7,960,470	B2	6/2011	Okahira
D650,793	S	12/2011	Impas
8,121,408	B2	2/2012	Omori
8,165,352	B1	4/2012	Mohanty et al.
8,200,980	B1	6/2012	Robinson et al.
D663,743	S	7/2012	Tanghe
D663,744	S	7/2012	Tanghe
8,210,247	B2	7/2012	Blomgren
8,244,211	B2	8/2012	Clark
D667,423	S	9/2012	Nagamine
8,280,120	B2	10/2012	Hoyos et al.
8,316,237	B1	11/2012	Felsher et al.
8,326,000	B2	12/2012	Jung et al.
8,355,528	B2	1/2013	Bladel et al.
8,392,268	B2	3/2013	Smith et al.
8,396,246	B2	3/2013	Anbalagan et al.
8,411,909	B1	4/2013	Zhao et al.
8,416,312	B2	4/2013	Matsunaga
8,457,367	B1	6/2013	Sipe
8,460,024	B2	6/2013	Damodharan et al.
D691,171	S	10/2013	Brinda
D692,018	S	10/2013	Wenz
D692,915	S	11/2013	Brinda
8,649,604	B2	2/2014	Steinberg et al.
D702,714	S	4/2014	Abratowski
D703,693	S	4/2014	Brinda

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,709,801 B2 4/2014 Pan et al.
8,722,977 B2 5/2014 Wooten, Jr.
8,743,051 B1 6/2014 Moy et al.
8,750,574 B2 6/2014 Ganong et al.
8,787,627 B1 7/2014 Freedman
D710,878 S 8/2014 Jung
D712,909 S 9/2014 Francisco
D712,915 S 9/2014 Lee
D713,410 S 9/2014 Francisco
D715,317 S 10/2014 Pearce
8,856,541 B1 10/2014 Chaudhury
8,867,849 B1 10/2014 Kirkham
D717,339 S 11/2014 Wen
D717,829 S 11/2014 Lee
8,922,480 B1 12/2014 Freed et al.
8,959,578 B2 2/2015 Simpson et al.
D725,151 S 3/2015 Bray
D725,668 S 3/2015 Clare
D726,221 S 4/2015 Gomez
D728,623 S 5/2015 Lim
D730,389 S 5/2015 Izotov
9,037,354 B2 5/2015 Mondragon
D730,933 S 6/2015 Lee
D730,941 S 6/2015 Marianek
D731,552 S 6/2015 Seo
9,069,447 B2 6/2015 Kim
D733,755 S 7/2015 Kadosh
9,076,008 B1 7/2015 Moy
9,076,028 B2 7/2015 Summers
D736,812 S 8/2015 Yoo
D737,325 S 8/2015 Kim
D738,921 S 9/2015 Lim
9,137,246 B2 9/2015 Parry et al.
D740,833 S 10/2015 Bae
9,152,849 B2 10/2015 Ganong et al.
D742,417 S 11/2015 Brunner
D745,567 S 12/2015 Park
9,202,105 B1 12/2015 Wang et al.
9,209,355 B2 12/2015 Senda et al.
D747,354 S 3/2016 Park
D752,078 S 3/2016 Guesnon, Jr.
9,286,507 B2 3/2016 Shuster
D753,132 S 4/2016 Cuthbert
D756,401 S 5/2016 Soldner
D757,084 S 5/2016 Chaudhri
D759,723 S 6/2016 Butcher
D761,268 S 7/2016 Oh
D761,277 S 7/2016 Harvell
D762,655 S 8/2016 Kai
D762,673 S 8/2016 Seo
D762,715 S 8/2016 Williamson
D763,271 S 8/2016 Everette
D763,306 S 8/2016 Lee
D764,526 S 8/2016 Gomez
D764,534 S 8/2016 Seo
D765,117 S 8/2016 Joo
D765,133 S 8/2016 Joo
9,424,491 B1 8/2016 Kirkham
9,430,695 B2 8/2016 Summers
D765,674 S 9/2016 Kim
D766,298 S 9/2016 Bae
D766,314 S 9/2016 Bauer
D766,926 S 9/2016 Fleischmann
9,448,687 B1 9/2016 McKenzie
D769,933 S 10/2016 Sabia
9,459,132 B2 10/2016 Fehrenbach et al.
D772,288 S 11/2016 Montes
D772,929 S 11/2016 Montes
D776,680 S 1/2017 Bae
D776,695 S 1/2017 Yu
D777,755 S 1/2017 Beaty
D778,923 S 2/2017 Zhou
D778,940 S 2/2017 Williamson
D780,781 S 3/2017 Ding
9,600,649 B2 3/2017 Parry et al.
9,607,138 B1 3/2017 Baldwin
D783,633 S 4/2017 Oh
D783,652 S 4/2017 Guan
D784,363 S 4/2017 Fleming et al.
9,621,548 B2 4/2017 Bud
D787,527 S 5/2017 Wilberding
D788,122 S 5/2017 Tada
D788,810 S 6/2017 Kim
D790,567 S 6/2017 Su
D791,158 S 7/2017 Shiino
D791,806 S 7/2017 Brewington
D792,903 S 7/2017 Park
9,708,909 B2 7/2017 Atkinson et al.
D794,663 S 8/2017 Sakuma
9,740,848 B2 8/2017 Parry et al.
D798,321 S 9/2017 Lieb
D798,902 S 10/2017 Choi
D799,544 S 10/2017 Kim
D800,743 S 10/2017 Rhodes
9,798,420 B2 10/2017 Ichikawa
D801,990 S 11/2017 Reissner
D803,870 S 11/2017 Landry
D805,546 S 12/2017 Wu
D805,548 S 12/2017 King
D806,092 S 12/2017 Hersh
D806,113 S 12/2017 Beckman
D806,733 S 1/2018 Lim
D807,378 S 1/2018 Imamura
D807,381 S 1/2018 Hersh
9,911,036 B2 3/2018 Hartman
9,953,149 B2 4/2018 Tussy
D817,994 S 5/2018 Jou
D819,075 S 5/2018 Tsuji
9,958,687 B2 5/2018 Chern et al.
D820,305 S 6/2018 Clediere
D820,852 S 6/2018 Chung
D821,439 S 6/2018 Sowden
D821,443 S 6/2018 Jang
D822,054 S 7/2018 Persson
D823,335 S 7/2018 Alonso
D823,867 S 7/2018 Berlow
D823,891 S 7/2018 Lupei
10,032,066 B2 7/2018 Gongaware et al.
D825,587 S 8/2018 O'Rourke
D825,588 S 8/2018 Hashimoto
D829,240 S 9/2018 Rowny
D835,665 S 12/2018 Kimura
D850,478 S 6/2019 Kim
D854,578 S 7/2019 Clement
10,360,464 B1 7/2019 McKay et al.
D866,570 S 11/2019 Burroughs
D866,584 S 11/2019 Burroughs
D870,125 S 12/2019 Shim
D873,845 S 1/2020 Keyzer
10,614,204 B2 4/2020 Tussy
D886,853 S 6/2020 Clement
D888,764 S 6/2020 Lee
10,691,934 B2 6/2020 Bud
10,698,995 B2 6/2020 Tussy
D891,464 S 7/2020 Zurmoehle
10,803,160 B2 10/2020 Tussy
10,915,618 B2 2/2021 Tussy
10,917,431 B2 2/2021 Turgeman
10,963,669 B2 3/2021 Berini et al.
D928,176 S 8/2021 Hamre
11,256,792 B2 2/2022 Tussy
D949,178 S 4/2022 Kim
D952,661 S 5/2022 Behzadi
11,386,189 B2 7/2022 Van Os
11,393,108 B1 7/2022 Modestine
D963,381 S 9/2022 Davis
D964,385 S 9/2022 Fang
2002/0054059 A1 5/2002 Schneiderman
2002/0055955 A1 5/2002 Lloyd-Jones et al.
2002/0103813 A1 5/2002 Frigon
2002/0087622 A1 7/2002 Anderson
2002/0191818 A1 12/2002 Matsuo et al.
2003/0039380 A1 2/2003 Sukegawa et al.
2003/0053663 A1 3/2003 Chen et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2003/0063669 A1 4/2003 Lee et al.
2003/0095053 A1 5/2003 Kandogan
2003/0103652 A1 6/2003 Lee et al.
2003/0133599 A1 7/2003 Tian et al.
2003/0198368 A1 10/2003 Kee
2003/0217294 A1 11/2003 Kyle
2003/0236832 A1 12/2003 McIntyre et al.
2004/0070678 A1 4/2004 Toyama et al.
2004/0081338 A1 4/2004 Takenaka
2004/0091136 A1 5/2004 Dombrowski
2004/0109584 A1 6/2004 Lestideau
2004/0125991 A1 7/2004 Yokoi
2004/0143598 A1 7/2004 Drucker et al.
2004/0190758 A1 9/2004 Doi et al.
2004/0201709 A1 10/2004 McIntyre et al.
2004/0218792 A1 11/2004 Spoonhower et al.
2004/0264780 A1 12/2004 Zhang et al.
2005/0031173 A1 2/2005 Hwang
2005/0065855 A1 3/2005 Geller
2005/0065885 A1 3/2005 Gordon
2005/0094849 A1 5/2005 Sung et al.
2005/0100195 A1 5/2005 Li
2005/0117802 A1 6/2005 Yonaha et al.
2005/0141766 A1 6/2005 Nagahashi et al.
2005/0180627 A1 8/2005 Yang et al.
2005/0190273 A1 9/2005 Toyama et al.
2005/0220347 A1 10/2005 Enomoto
2005/0251015 A1 11/2005 Takikawa et al.
2005/0265603 A1 12/2005 Porter
2006/0050933 A1 3/2006 Adam et al.
2006/0110014 A1 5/2006 Philomin
2006/0133672 A1 6/2006 Li
2006/0156029 A1 7/2006 Algazi
2006/0173560 A1 8/2006 Widrow
2006/0218225 A1 9/2006 Hee Voon et al.
2006/0222215 A1 10/2006 Jung et al.
2006/0224523 A1 10/2006 Elvitigala
2006/0239515 A1 10/2006 Zhang et al.
2006/0251292 A1 11/2006 Gokturk et al.
2006/0251338 A1 11/2006 Gokturk et al.
2006/0251339 A1 11/2006 Gokturk et al.
2006/0253491 A1 11/2006 Gokturk et al.
2006/0274978 A1 12/2006 Fukuda et al.
2007/0074114 A1 3/2007 Adjali et al.
2007/0081744 A1 4/2007 Gokturk et al.
2007/0098230 A1 5/2007 Norita
2007/0098303 A1 5/2007 Gallagher et al.
2007/0177805 A1 8/2007 Gallagher
2007/0206834 A1 9/2007 Shinkai et al.
2007/0211925 A1 9/2007 Aoki et al.
2007/0290499 A1 12/2007 Tame
2008/0037869 A1 2/2008 Zhou
2008/0046458 A1 2/2008 Tseng et al.
2008/0077595 A1 3/2008 Leebow
2008/0080743 A1 4/2008 Schneiderman et al.
2008/0080745 A1 4/2008 Vanhoucke et al.
2008/0091723 A1 4/2008 Zuckerberg et al.
2008/0100195 A1 5/2008 Kim et al.
2008/0130960 A1 6/2008 Yagnik
2008/0212849 A1 9/2008 Gao
2008/0317379 A1 12/2008 Steinberg et al.
2009/0185784 A1 7/2009 Hiroike et al.
2009/0226052 A1 9/2009 Fedele
2009/0232367 A1 9/2009 Shinzaki
2009/0252383 A1 10/2009 Adam et al.
2009/0324018 A1 12/2009 Tell
2009/0324022 A1 12/2009 Sangberg et al.
2009/0324137 A1 12/2009 Stallings et al.
2010/0050134 A1 2/2010 Clarkson
2010/0054600 A1 3/2010 Anbalagan et al.
2010/0054601 A1 3/2010 Anbalagan et al.
2010/0061631 A1 3/2010 Omori
2010/0067750 A1 3/2010 Matsuo
2010/0158327 A1 6/2010 Kangas et al.
2010/0232656 A1 9/2010 Ryu
2010/0245614 A1 9/2010 Matsunaga
2010/0272363 A1 10/2010 Steinberg et al.
2010/0287053 A1 11/2010 Ganong et al.
2010/0310133 A1 12/2010 Mason et al.
2010/0317420 A1 12/2010 Hoffberg
2010/0318366 A1 12/2010 Sullivan
2011/0063108 A1 3/2011 Aonuma et al.
2011/0169853 A1 7/2011 Oiwa
2011/0196753 A1 8/2011 Hodgdon et al.
2011/0202531 A1 8/2011 Zuckerberg et al.
2011/0225481 A1 9/2011 Zuckerberg et al.
2011/0276484 A1 11/2011 Pearson et al.
2011/0282906 A1 11/2011 Wong
2012/0066758 A1 3/2012 Kasturi
2012/0140993 A1 6/2012 Bruso et al.
2012/0235790 A1 9/2012 Zhao et al.
2012/0323704 A1 12/2012 Steelberg
2013/0007032 A1 1/2013 Klappert
2013/0015946 A1 1/2013 Lau
2013/0057693 A1 3/2013 Baranek
2013/0066526 A1 3/2013 Mondragon
2013/0077835 A1 3/2013 Kritt et al.
2013/0086674 A1 4/2013 Horvitz et al.
2013/0179298 A1 7/2013 Segman
2013/0226740 A1 8/2013 Biliosa
2013/0236066 A1 9/2013 Shubinsky
2013/0246158 A1 9/2013 Cannon
2013/0267204 A1 10/2013 Schultz et al.
2013/0342672 A1 12/2013 Gray et al.
2014/0012756 A1 1/2014 Beraja
2014/0022179 A1 1/2014 Yoon
2014/0059673 A1 2/2014 Azar
2014/0098174 A1 4/2014 Summers
2014/0118257 A1 5/2014 Baldwin
2014/0123275 A1 5/2014 Azar
2014/0165187 A1 6/2014 Daesung
2014/0169643 A1 6/2014 Todoroki
2014/0173443 A1 6/2014 Hawkins, III
2014/0197922 A1 7/2014 Stanwood
2014/0198959 A1 7/2014 Derakhshani
2014/0337791 A1 11/2014 Agnetta
2014/0337948 A1* 11/2014 Hoyos G06Q 20/40145 726/7
2014/0351761 A1 11/2014 Bae
2015/0052462 A1 2/2015 Kulkarni
2015/0055821 A1 2/2015 Fotland
2015/0074615 A1 3/2015 Han
2015/0077323 A1 3/2015 Ramaswamy
2015/0131872 A1 5/2015 Ganong et al.
2015/0148106 A1 5/2015 Choi
2015/0153571 A1 6/2015 Ballard
2015/0205399 A1 7/2015 Kim
2015/0205454 A1 7/2015 Ainslie
2015/0212684 A1 7/2015 Sabia
2015/0227286 A1 8/2015 Kang et al.
2015/0262024 A1* 9/2015 Braithwaite G06V 10/141 382/118
2015/0310259 A1* 10/2015 Lau G06V 40/169 382/118
2015/0310260 A1 10/2015 Summers
2015/0378433 A1 12/2015 Savastinuk
2016/0026425 A1 3/2016 Lee
2016/0062456 A1* 3/2016 Wang G06F 3/013 382/117
2016/0063235 A1 3/2016 Tussy
2016/0071111 A1 3/2016 Wang et al.
2016/0209939 A1 7/2016 Zambetti
2016/0259528 A1 9/2016 Foss
2016/0261675 A1 9/2016 Block
2016/0284123 A1 9/2016 Hare
2016/0342826 A1 11/2016 Apostolos et al.
2016/0364561 A1 12/2016 Lee
2017/0083086 A1 3/2017 Mazur
2017/0111493 A1 4/2017 Stone
2017/0161906 A1* 6/2017 Davis G06V 40/161
2017/0220843 A1 8/2017 Apostolos et al.
2018/0096212 A1* 4/2018 Lin G06V 40/172
2018/0139157 A1 5/2018 Deculus
2018/0150708 A1* 5/2018 Martin G06V 40/67

(56) **References Cited**

U.S. PATENT DOCUMENTS

2018/0165508	A1	6/2018	Othman et al.	
2018/0173980	A1*	6/2018	Fan	G06V 40/45
2018/0342018	A1	11/2018	Pancholi	
2019/0080072	A1	3/2019	Van Os	
2019/0080189	A1	3/2019	Van Os	
2019/0105551	A1	4/2019	Ray	
2019/0213311	A1	7/2019	Tussy	
2020/0042685	A1	2/2020	Tussy et al.	
2022/0019325	A1	1/2022	Xu	
2022/0342972	A1	10/2022	Van Os	

FOREIGN PATENT DOCUMENTS

EP	1455297	9/2004
EP	1693801	8/2006
EP	1388802	2/2024
JP	2005-287878	10/2005
JP	2006-259923	9/2006
JP	2007-148968	6/2007
JP	2007-304801	11/2007
JP	2014-010686	1/2014
KR	20130097581	9/2013
KR	10-1755995	7/2017
WO	WO 2006/130542	12/2006
WO	WO 2008/107002	9/2008
WO	WO 2015/070320	5/2015
WO	WO 2017/100929	6/2017
WO	WO 2007/119818	10/2019

OTHER PUBLICATIONS

Android_locked-out-PDF, screenshot, date unknown, author unknown.
Android-lock-screen1-PDF, screenshot, date unknown, author unknown.
Arrington, "First Screen Shots of Riya", Oct. 26, 2005, http://techcrunch.com/2005/10/26/riya-prepares-tolaunch-alpha/, 10 pages.
Arrington, "Ojos—Auto Name & Tag Your Photos", Aug. 15, 2005, http://techcrunch.com/2005/08/31/ojos-autoname-tag-your-photos/, 8 pages.
Baker, "Google & Riya Face Recognition Photo Search", Nov. 22, 2005, http://www.searchenginejournal.com/google-riya-face-recognition-photo-search/25501, 1 page.
Becker et al., "Evaluation of Face Recognition Techniques for Application to Facebook", IEEE International conference on Automatic Face and Gesture Recognition, 2008, 6 pages.
Bletsko et al., "Using Skin-Color Motion for 3D Face Modelling and Synthesis", Sep. 6, 2003, WISP 2003, pp. 295-299.
Facebook, "Making Photo Tagging Easier", https://m.facebook.com/note/facebook/making-photo-tagging-easier/467145887130/?_tn_=C&_rdr, 2 pages.
Facetime—PDF, sceenshot, date unknown, author unknown.
Girija Chetty and Michael Wagner, "Automated lip feature extraction for liveness verification in audio-video authentication", Human Computer Communication laboratory School of Information Sciences and Engineering, University of Canberra, Australia, Proc. Image and Vision Computer (2004), Jan. 1, 2004, 6 pages.
Hagai Aronowitz, et al., Multi-Modal Biometrics for Mobile Authentication, IJCB, 2014.
Image 9-PDF, screenshot, date unknown, author unknown.
Iphone-Facetime-PDF, screen shot, date unknown, author unknown.
Keyboard-PDF, screen shot, date unknown, author unknown.
Kishore, "How to Add, Upload, and Tag Your Pictures and Photos in FaceBook", http://www.online-tech-tips.com/fun-stuff/how-to-add-upload-and-tag-your-pictures-and-photos-in-facebook/, Aug. 11, 2007, 13 pages.
Michelson et al., "Auto-tagging the Facebook", 2006, http://cs229.stanford.edu/proj2006/MichelsonOrtizAutoTaggingTheFacebook.pdf, 5 pages.
Optical Illusions—Animated GIF & JPG, dated Oct. 28, 2013, plus.google.com [online], [retrieved Jun. 19, 2017]. Available from internet <URL:https://plus.google.com/+Whak-Off/posts/CX4YhzXSQy2>.
Passcode-lock-PDF, screen shot, date unknown, author unknown.
Passcode-PDF, screen shot, date unknown, author unknown.
Ponce, "Riya._Photo_Sharing_with_Face_Recognition", (Oct. 28, 2005, http://www.ohgizmo.com/2005/10/28/riya-photo-sharing-with-face-recognition/, 2 pages.
Rafalovitch, "Viewfinder Friends—idea for Facebook application", Nov. 14, 2007, http://blog.outerthoughts.com/2007/11/viewfinder-friends-idea-for-facebook-application/, 5pages.
Rogssignol, Joe. "How to customise the Lock screen in iOS 7." iDownloadBlog, posted Jan. 11, 2014 (Retrieved from the internet Mar. 30, 2016). Internet URL: <http: //www.idownloadblog.com/2014/01/11/how-to-theme-the-lock-screen-on-oos-7/>.
Schuon et al., "CS229 Project Report: Automated photo tagging in Facebook", Dec. 2007, http://cs229.Stanford.edu/proj2007/SchuonRobertsonZou-AutomatedPhotoTaggingInFacebook.pdf, 5 pages.
Screen Shot-PDF, screen shot, date unknown, author unknown.
Screenshot_2012-06-20-16-06-32-PDF, screen shot, date unknown, author unknown.
Shutterstock [online], Aug. 4, 2014 [retried Jul. 24, 2016]. Retrieved from the internet URL:http://www.tineye.com/search/543afefb8836762927558call587ce7f99a706ad/.,pic-199246373 stock phot male silhouette image.
Silvio Barra, et al., FAME: Face Authentication for Mobile Encounter, IEEE, 2013.
Stone, et al. "Autotagging Facebook: Social network context improves photo annotation," In Workshop on Internet Vision, 2008, 2 pages.
The Universal Face Login for 5 Billion Smartphones, zoomlogin.com [online], [retrieved Jun. 19, 2017]. Available from internet <URL:https://zoomlogin.com/>.
Topic_facetime_ios-PDF, screen shot, date unknown, author unknown.
Unknown, "What does it mean to "tag" someones picture on facebook, whats the point of doing it?", Nov. 28, 2007, https://answers.yahoo.com/question/index?qid=20071128123629AAY0DLP, 2 pages.
Wong, Yongkang, et al. "Patch-based probalistic image quality assessment for face selection and improved video-based face recognition." CVPR 2011 Workshops. IEEE, 2011.
Wp_ss_20130124-00071-PDF, screen shot, Jan. 24, 2013, author unknown.
Yadav, "Facebook—The Complete Biography", Aug. 25, 2006, http://mashable.com12006/08/25/facebook-protile/, 7 pages.
Yang, et al., "Detecting Faces in Images: A Survey", Jan. 2002, IEEE Trans. Pattern Analysis Machine Intelligence, 24(1), 2 pages.
"An Overview of Face Liveness Detection", Chakraborty, et al., Dept. of Computer Science and Engineering, National Institute of Technology, Silchar India, International Journal on Information Theory (IJIT), vol. 3, No. 2, DOI: 10.512/ijit.2014.3202, 15 pages, Apr. 2014.
"SVO Fast Semi-Direct Monocular Visual Odometry", Christian Forster, et al., ResearchGate, Conference Paper in Proceedings—IEEE International Conference on Robotics and Automation, DOI: 10.1109/ICRA.2014.6906584, https://www.researchgate.net/publication/262378002, 9 pages, May 18, 2014.
"Evaluating Liveness by Face Images and the Structure Tensor", Kollreider, et al., Halmstad University, SE-30118, Sweden, Halmstad University Post-Print, © IEEE 2005, Fourth IEEE Workshop on Automatic Identification Advanced Technologies, 2005, IEEE: 2005. pp. 75-80, DOI: http://dx.doi.org/10.1109/AUTOID.2005.20, 7 pages, date unknown.
"An Iterative Image registration Technique with an Application to Stereo Vision", Lucas, et al., Computer Science Department, Carnegie-Mellon University, Pittsburgh, Pennsylvania 15213, From Proceedings of Imaging Understanding Workshop, pp. 121-130 (1981)., pp. 121-130, 10 pgs., date unknown.
"Head Gesture Recognition Using Optical Flow Based Classification with Reinforcement of GMM Based Background Subtraction", Saikia, et al., Department of Electronics and Communication Engineering, DBCET, Assam Don Bosco University, International Journal of Computer Application (0975-8887), vol. 65—No. 25, Mar. 2013, 7 pgs.
"A Liveness Detection Method for Face Recognition Base on Optical Flow Field", Bao, et al., College of Computer Science,

(56) **References Cited**

OTHER PUBLICATIONS

Zhejiang University, 978-1-4244-3986-7/09/$25.00 © 2009 IEEE, IEEE Xplore (Mar. 15, 2022 download), 4 pages.
This AI Tries to Figure Out If You're a Real Person, by Aaron Tilley, dated Aug. 22, 2017, forbes.com [online]. Retrieved Nov. 5, 22 from internet, <URL:https://www.forbes.com/sites/aarontilley/2017/08/22/thi-ai-tries-to-figure-out-if-youre-a-real-person/?sh=3ace069014e0> (Year: 2017).
Life detection, dated to Dec. 1, 2020, innovatrics.com [online]. Retrieved Nov. 5, 2022 from internet <URL:https://web.archive.org/web/20201201080447/https://www.innovatric.com/es/dot-kit-de-herramientras-de-onboading-digital/deteccion-de-vida/> (Year: 2020).
Andrea Lagorio, et al., "Liveness detection based on 3D face shape analysis" IEEE, 2013.
Japan Patent Office ("JPO") Preliminary Report issued for Application No. JP2020-023503 on Feb. 9, 2021.

* cited by examiner

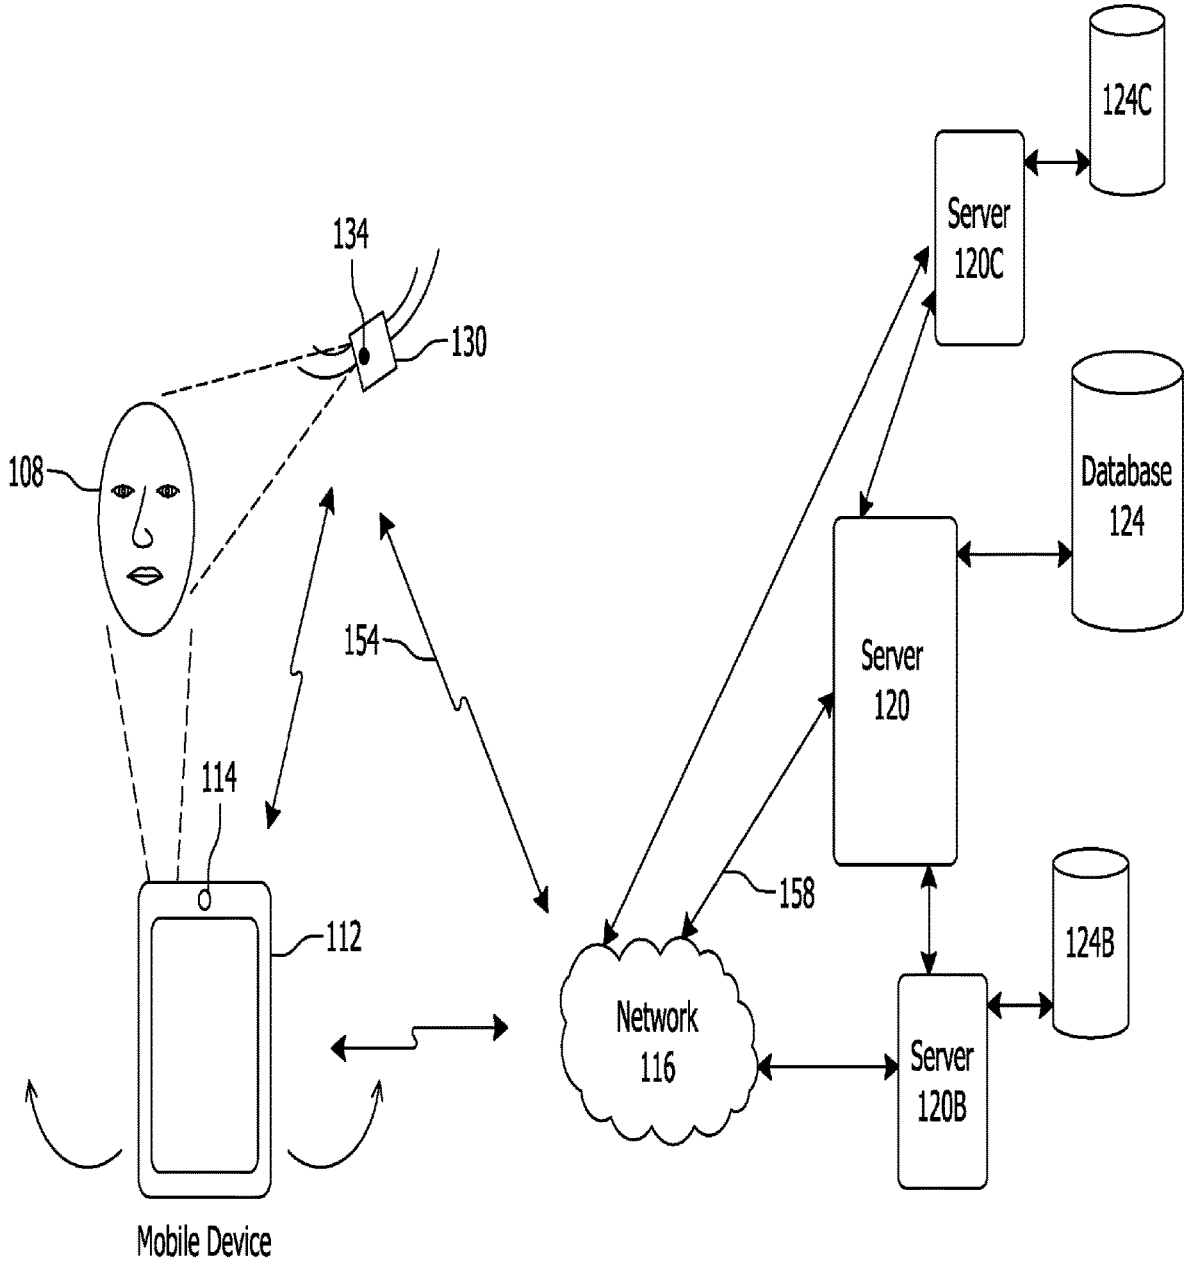

124C
Server
120C
134
130
108
Database
124
154
Server
120
114
158
124B
112
Network
116
Server
120B
Mobile Device

FIG. 1

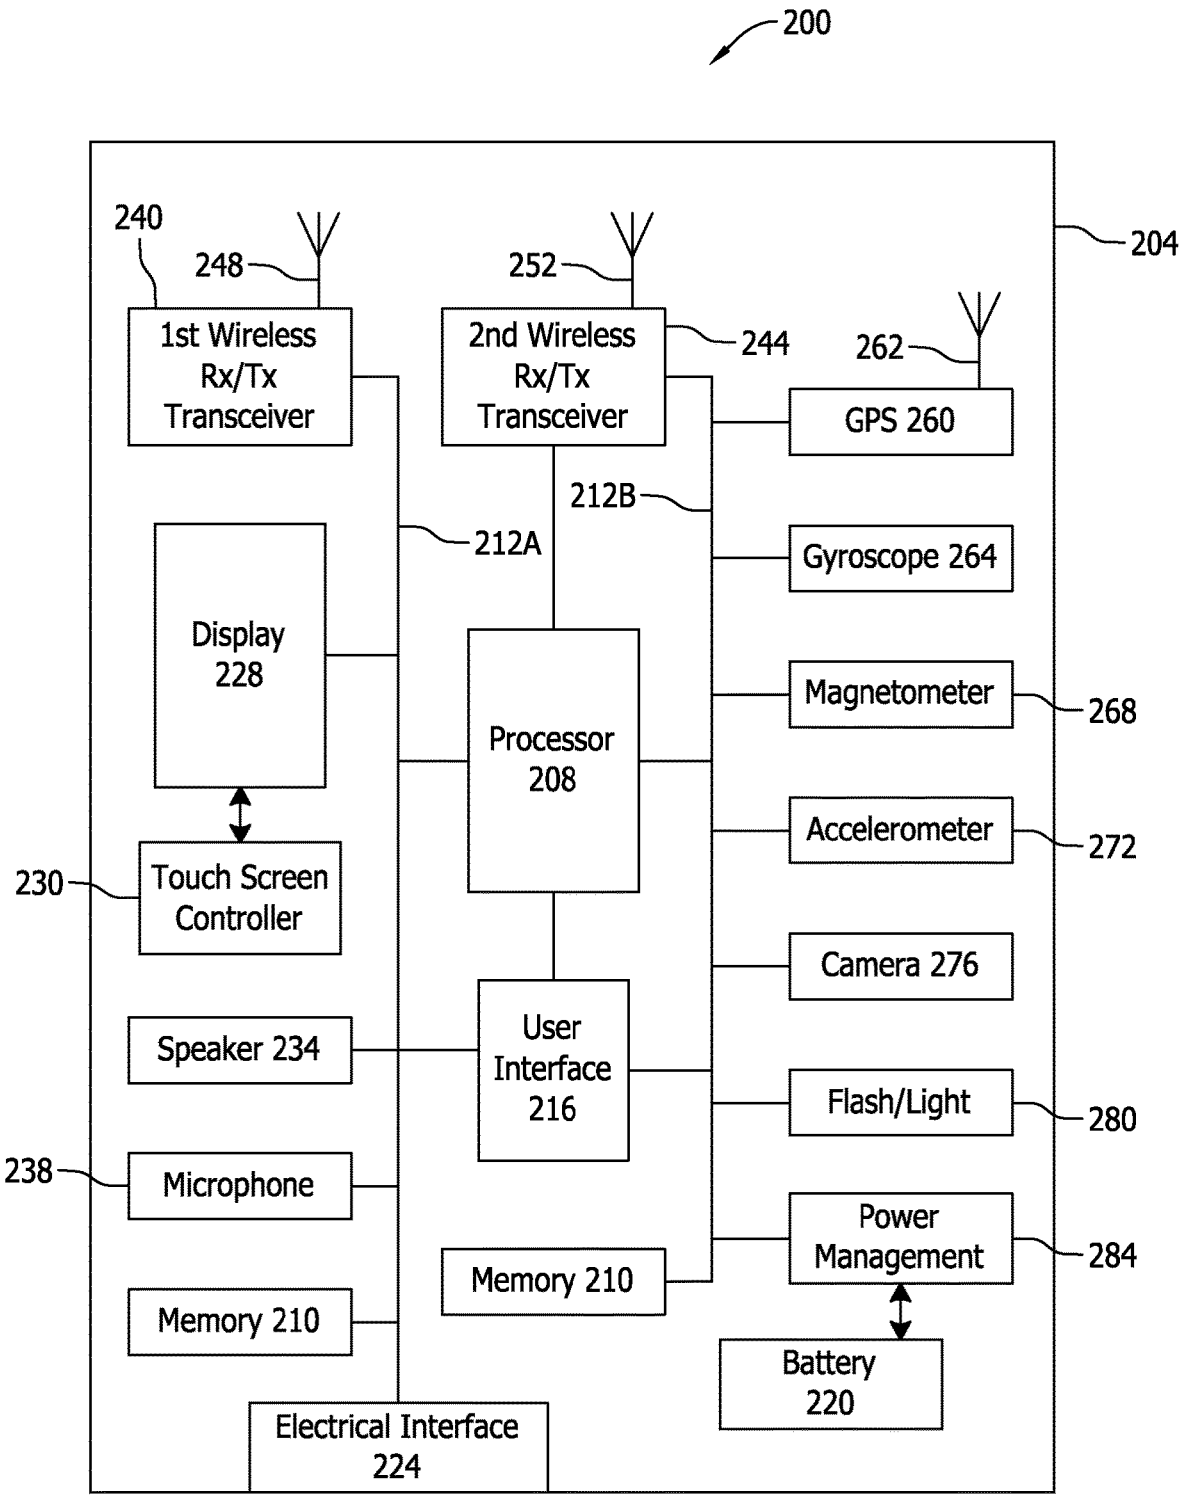

200
204
240
248
252
1st Wireless Rx/Tx Transceiver
2nd Wireless Rx/Tx Transceiver
244
262
GPS 260
212B
212A
Gyroscope 264
Display 228
Processor 208
Magnetometer
268
Accelerometer
272
230
Touch Screen Controller
Camera 276
Speaker 234
User Interface 216
Flash/Light
280
238
Microphone
Power Management
284
Memory 210
Memory 210
Battery 220
Electrical Interface 224

FIG. 2

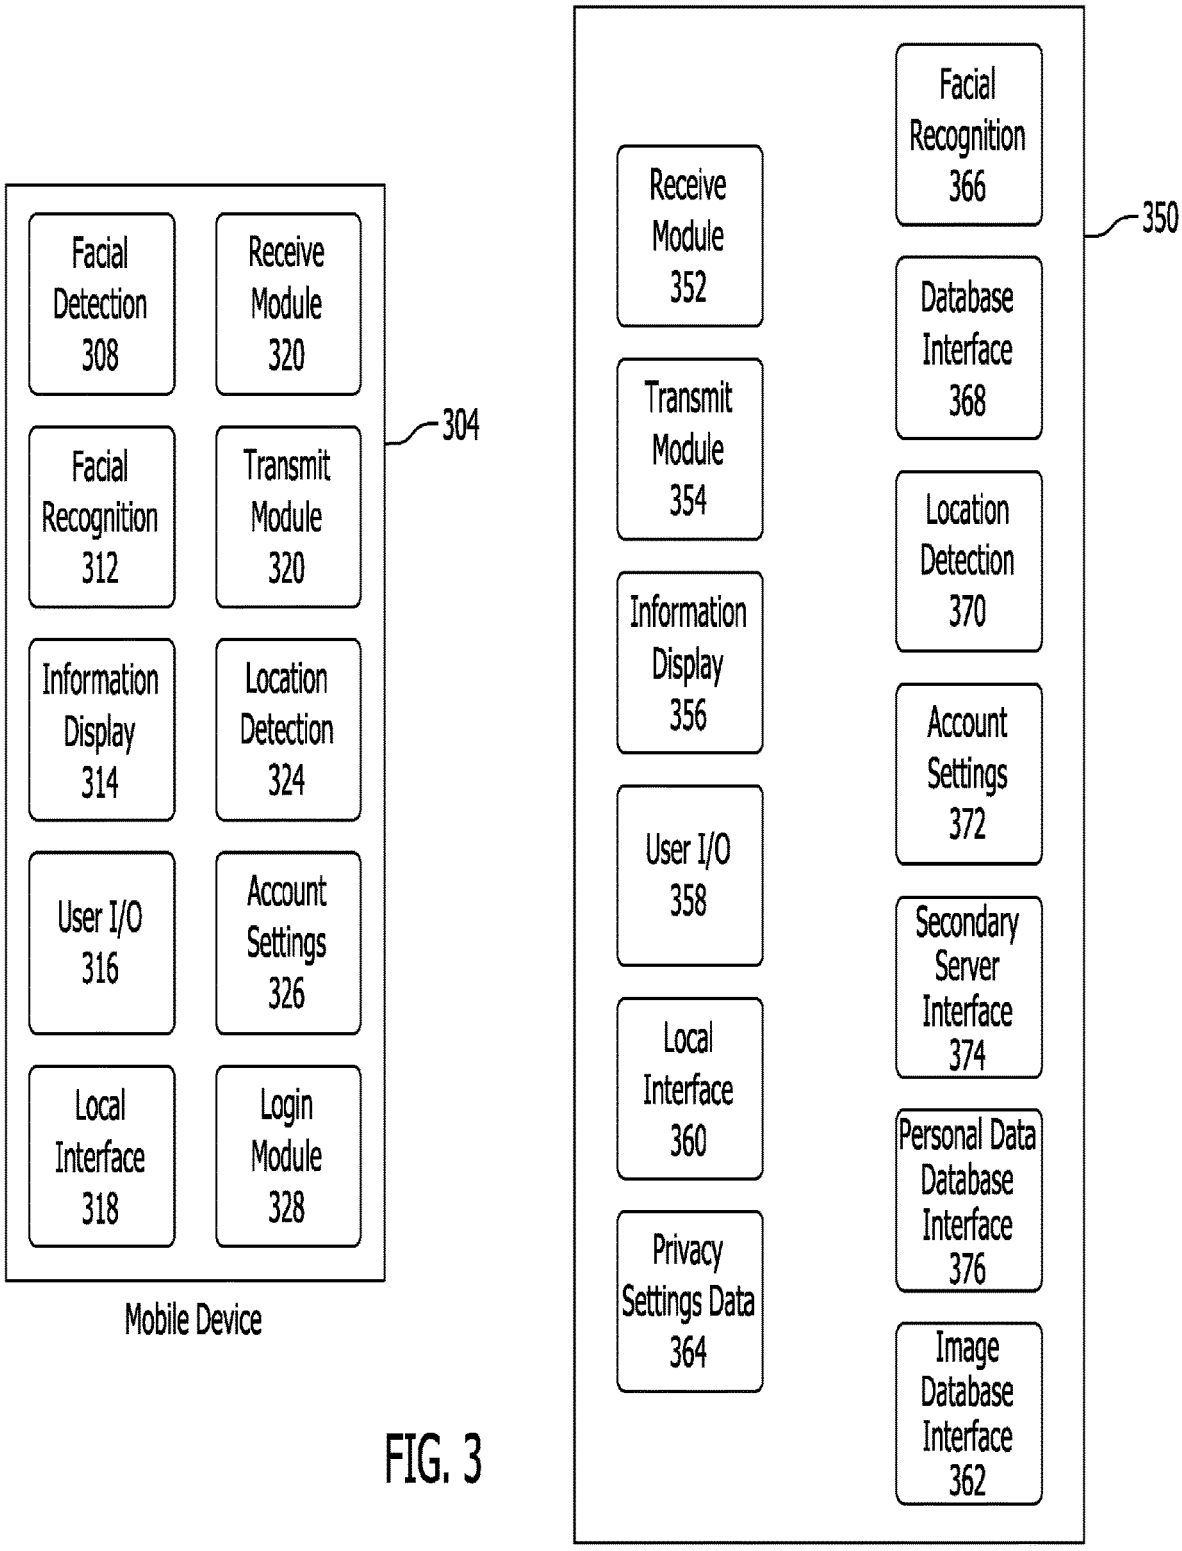

Facial Detection 308
Receive Module 320
Facial Recognition 312
Transmit Module 320
Information Display 314
Location Detection 324
User I/O 316
Account Settings 326
Local Interface 318
Login Module 328
304
Mobile Device
Receive Module 352
Transmit Module 354
Information Display 356
User I/O 358
Local Interface 360
Privacy Settings Data 364
Facial Recognition 366
Database Interface 368
Location Detection 370
Account Settings 372
Secondary Server Interface 374
Personal Data Database Interface 376
Image Database Interface 362
350

FIG. 3

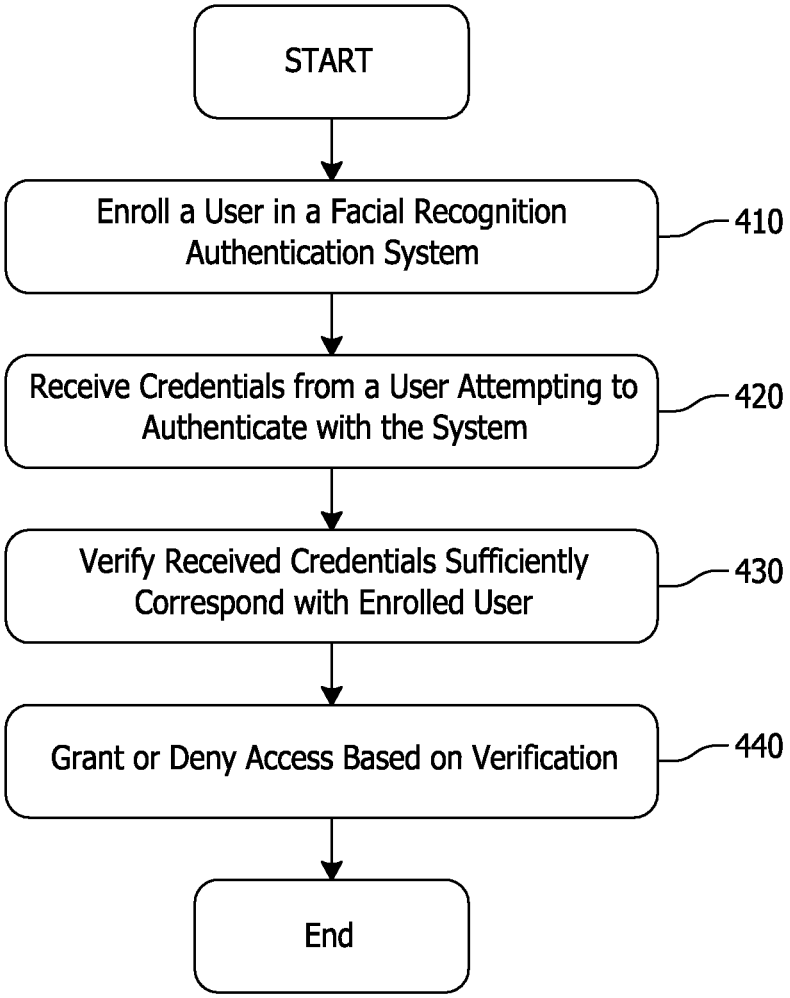

START
Enroll a User in a Facial Recognition Authentication System
410
Receive Credentials from a User Attempting to Authenticate with the System
420
Verify Received Credentials Sufficiently Correspond with Enrolled User
430
Grant or Deny Access Based on Verification
440
End

FIG. 4

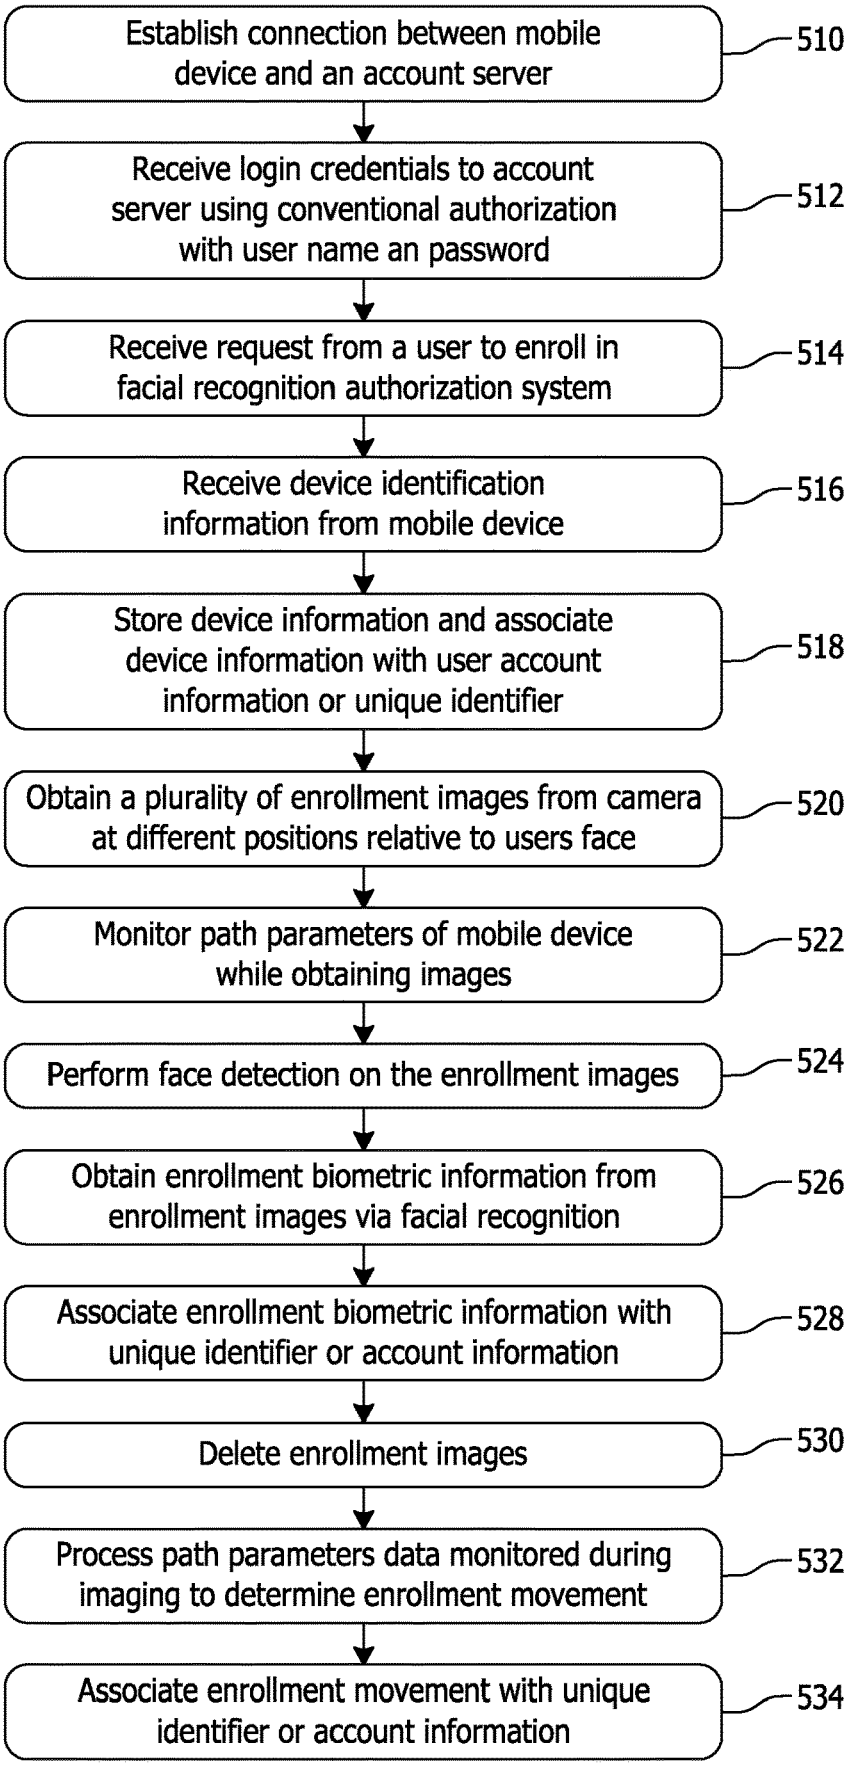

Establish connection between mobile device and an account server
510
Receive login credentials to account server using conventional authorization with user name an password
512
Receive request from a user to enroll in facial recognition authorization system
514
Receive device identification information from mobile device
516
Store device information and associate device information with user account information or unique identifier
518
Obtain a plurality of enrollment images from camera at different positions relative to users face
520
Monitor path parameters of mobile device while obtaining images
522
Perform face detection on the enrollment images
524
Obtain enrollment biometric information from enrollment images via facial recognition
526
Associate enrollment biometric information with unique identifier or account information
528
Delete enrollment images
530
Process path parameters data monitored during imaging to determine enrollment movement
532
Associate enrollment movement with unique identifier or account information
534

FIG. 5

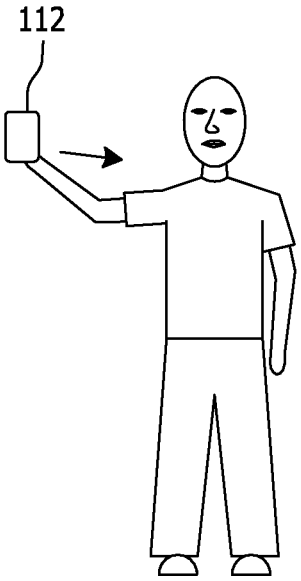


FIG. 6A

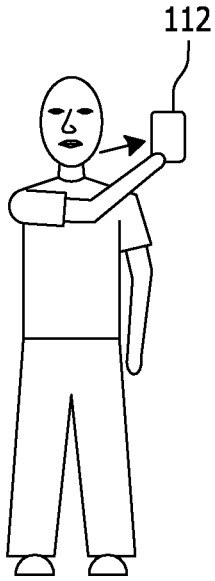


FIG. 6B

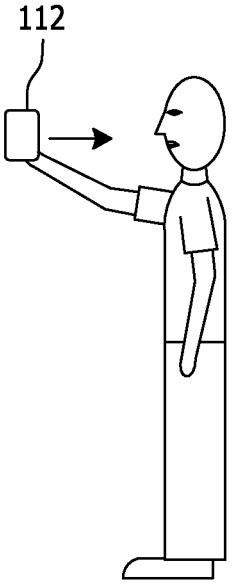


FIG. 7A

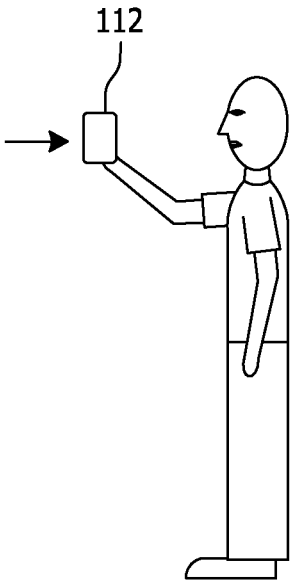


FIG. 7B

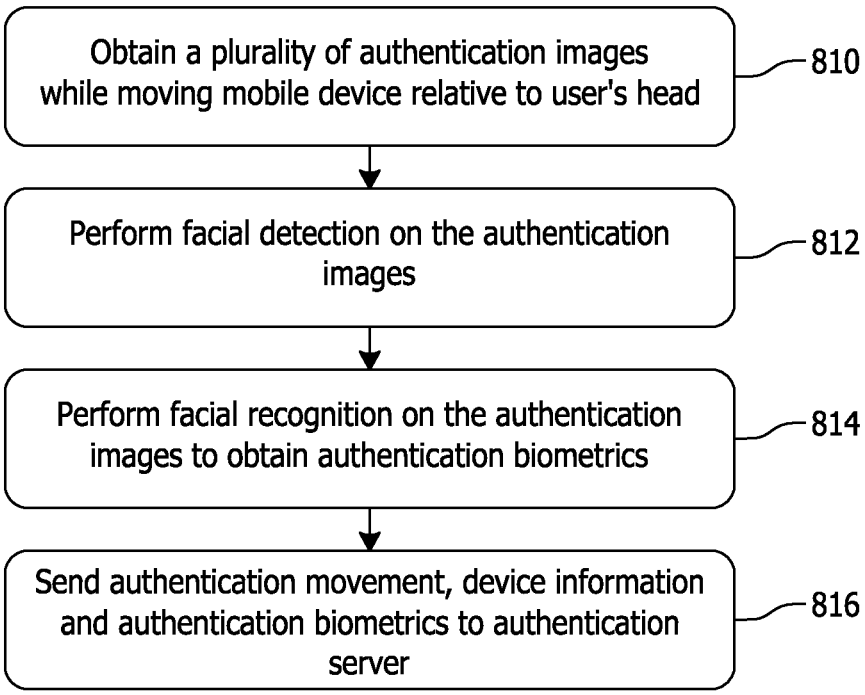

Obtain a plurality of authentication images while moving mobile device relative to user's head
810
Perform facial detection on the authentication images
812
Perform facial recognition on the authentication images to obtain authentication biometrics
814
Send authentication movement, device information and authentication biometrics to authentication server
816

FIG. 8

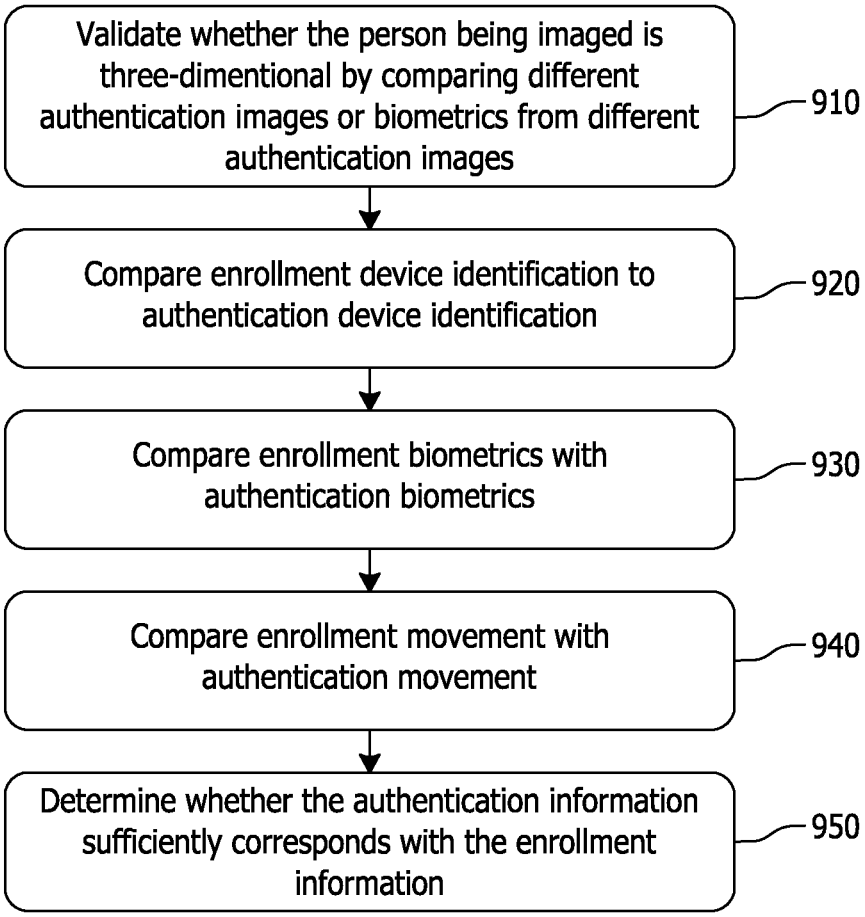

Validate whether the person being imaged is three-dimentional by comparing different authentication images or biometrics from different authentication images
910
Compare enrollment device identification to authentication device identification
920
Compare enrollment biometrics with authentication biometrics
930
Compare enrollment movement with authentication movement
940
Determine whether the authentication information sufficiently corresponds with the enrollment information
950

FIG. 9

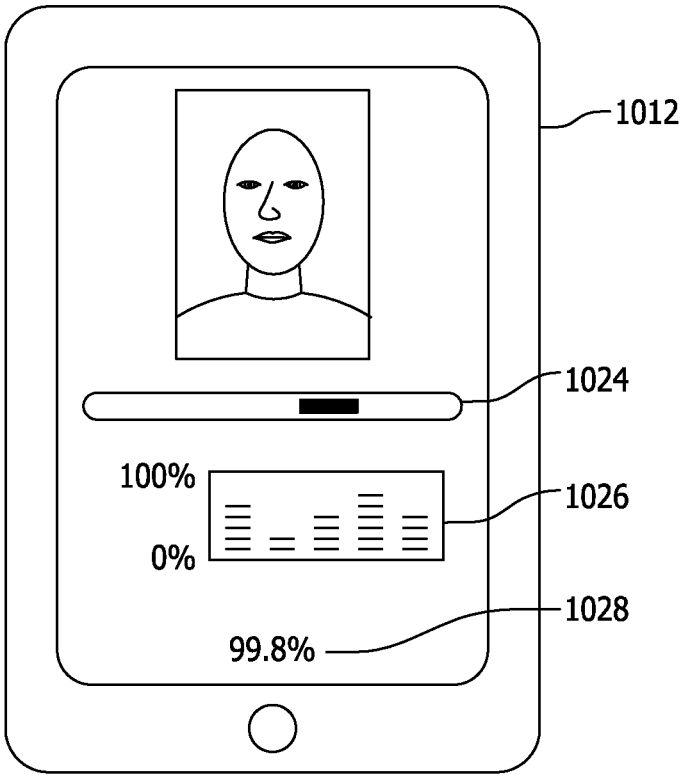


FIG. 10

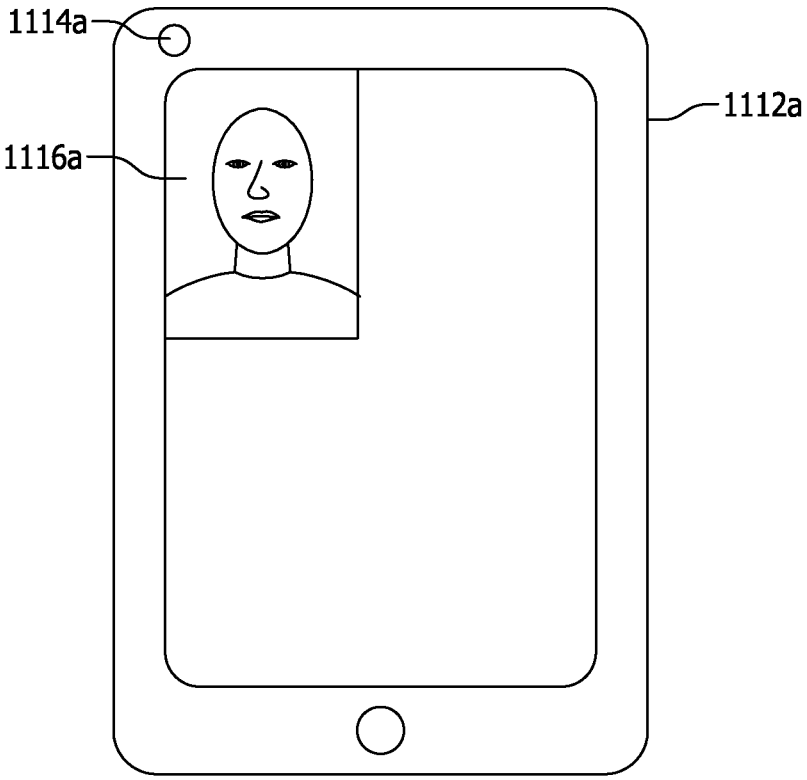


FIG. 11A

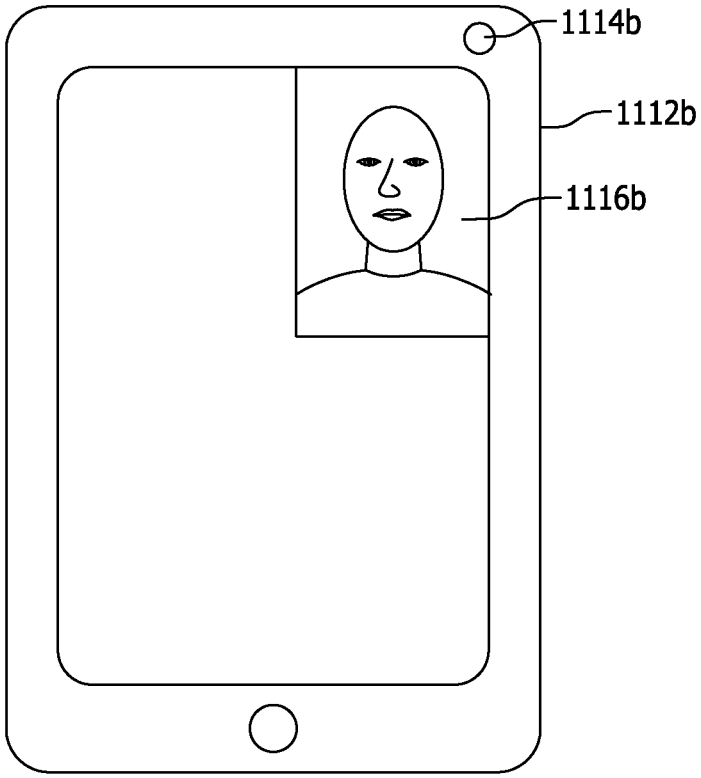


FIG. 11B

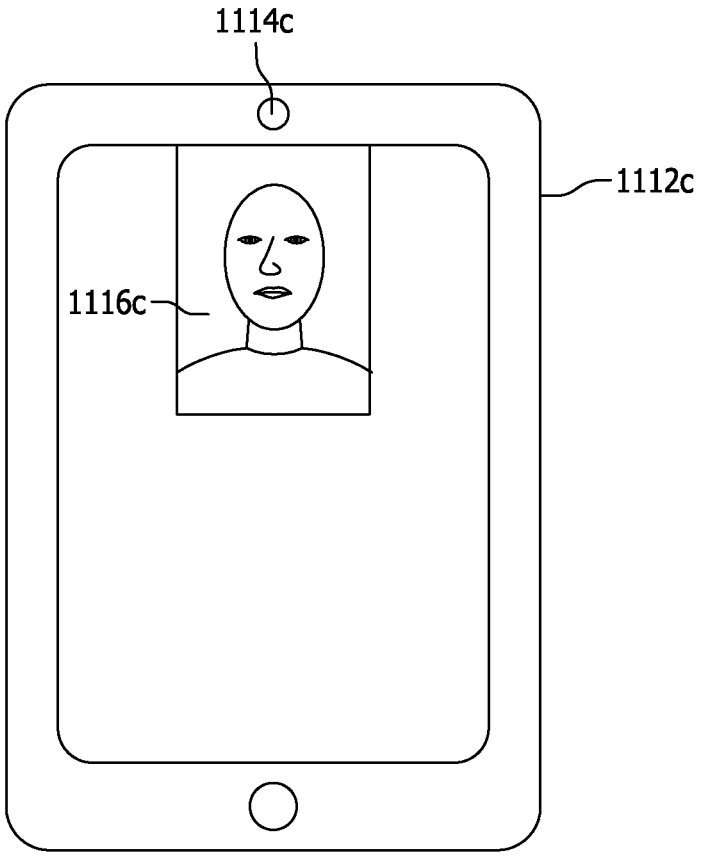


FIG. 11C

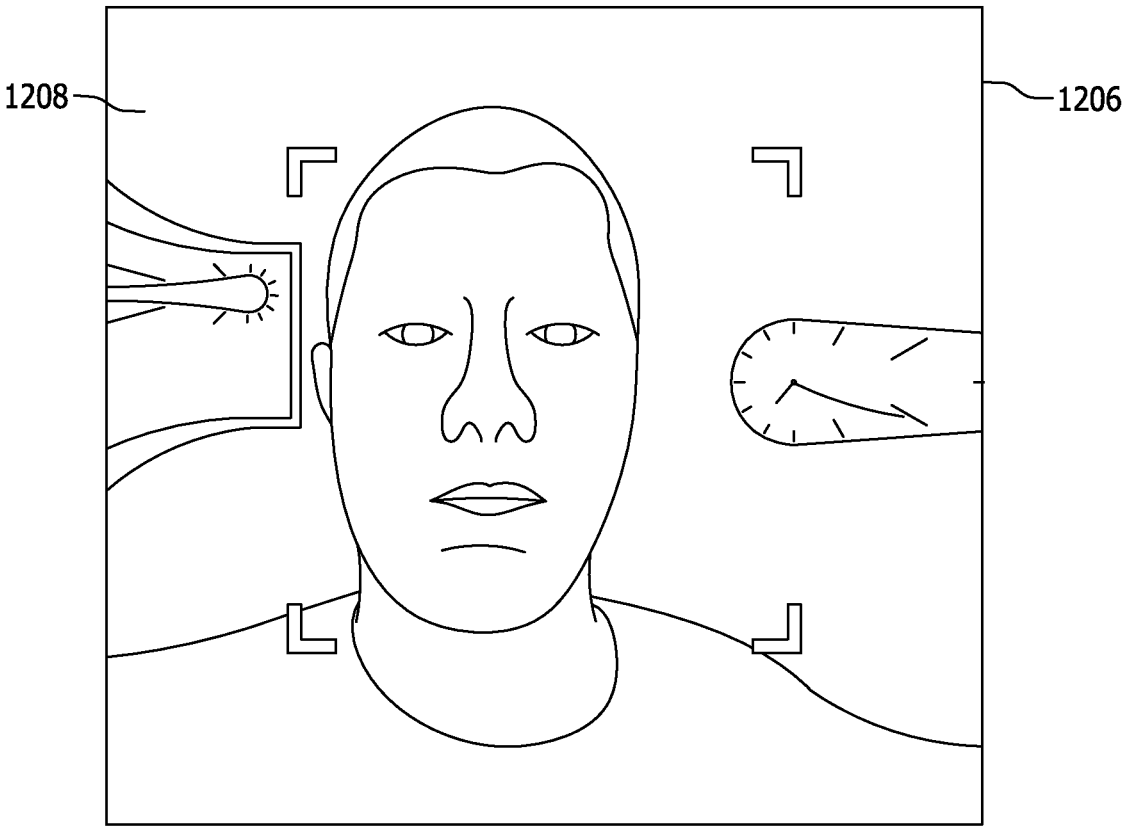


FIG. 12

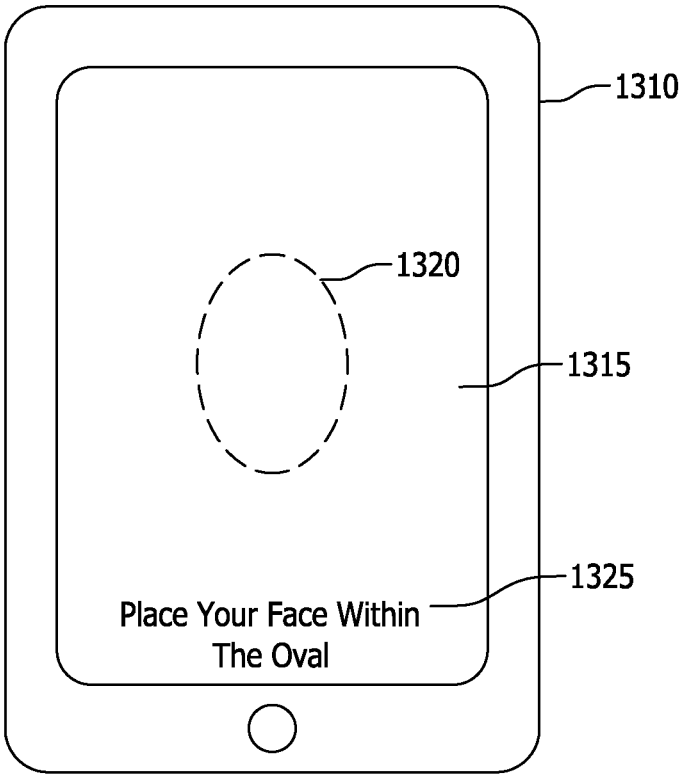


FIG. 13A

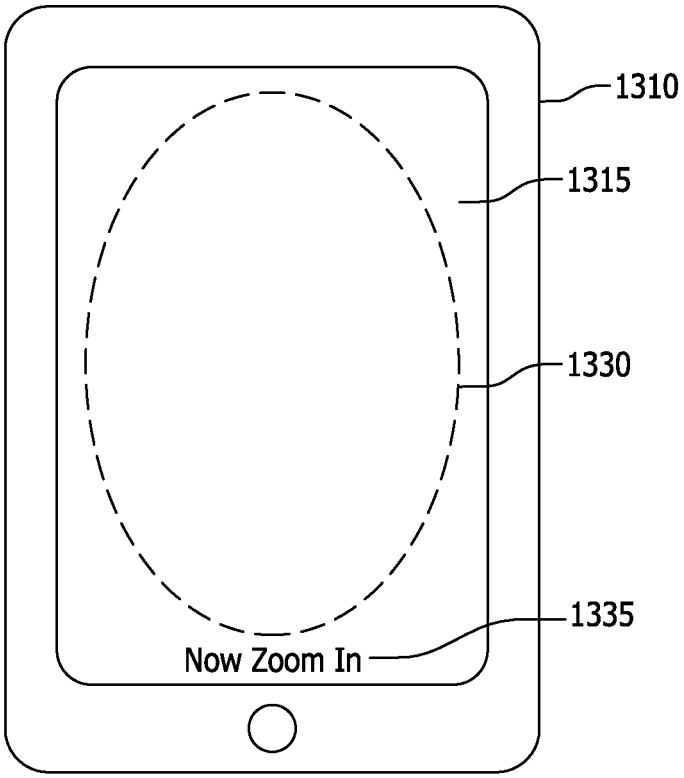


FIG. 13B

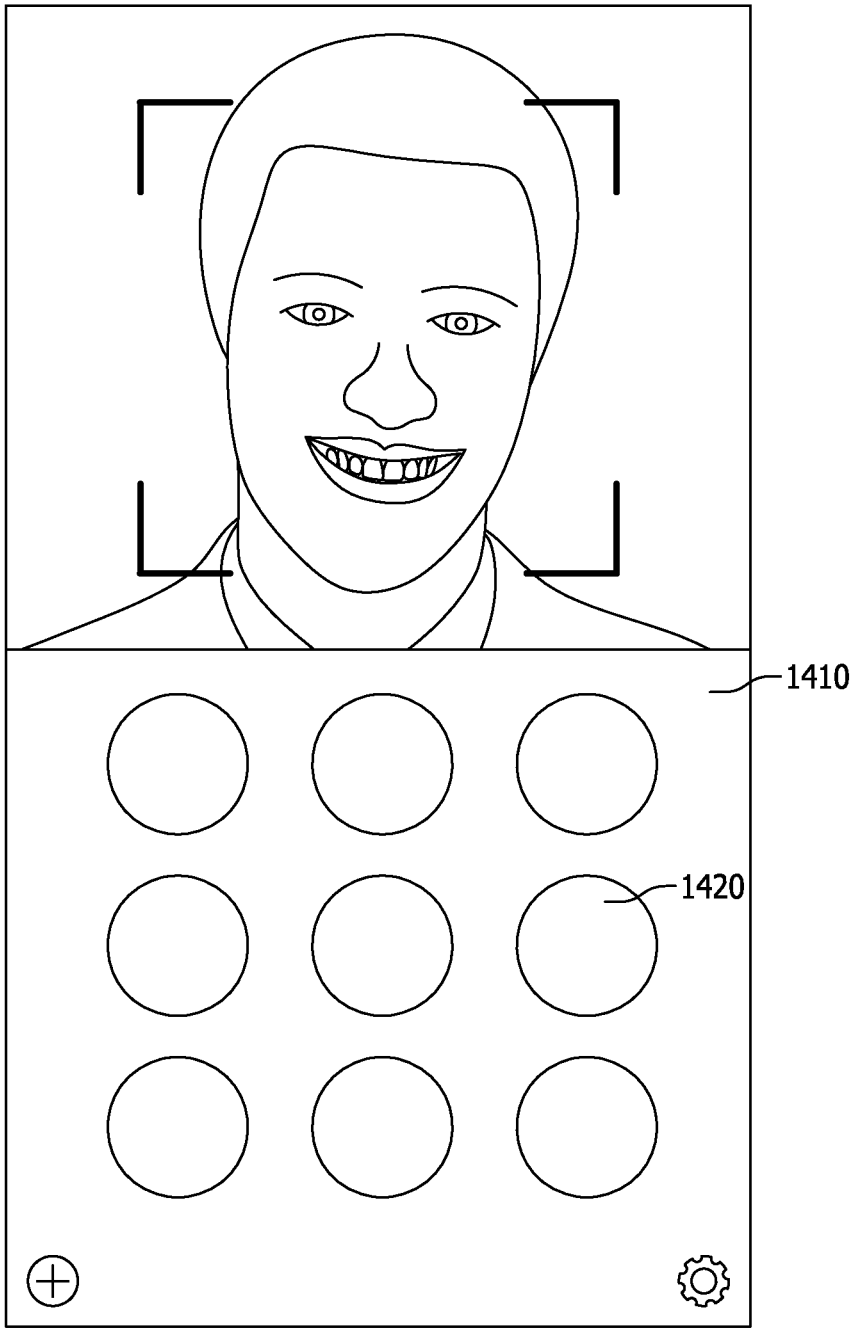


FIG. 14

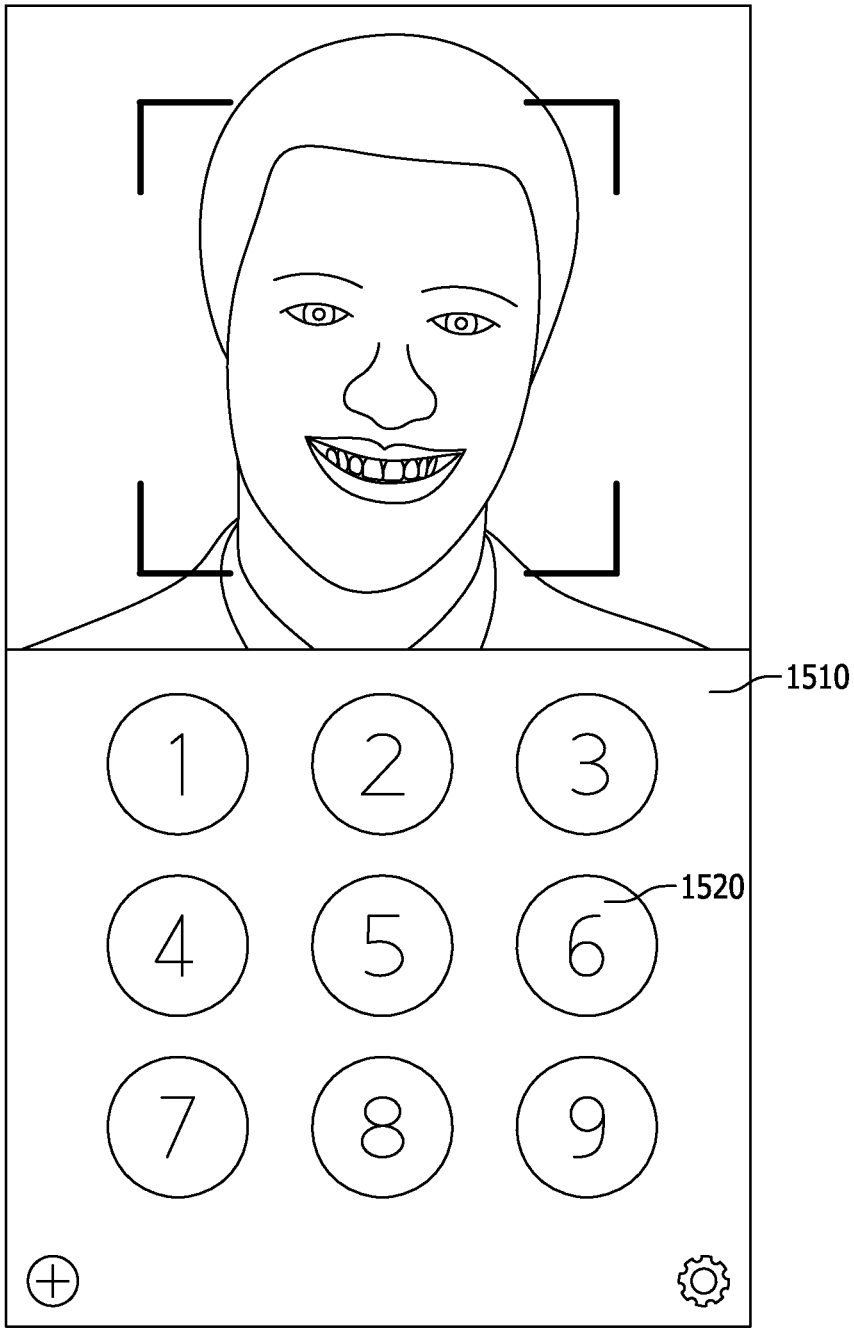


FIG. 15

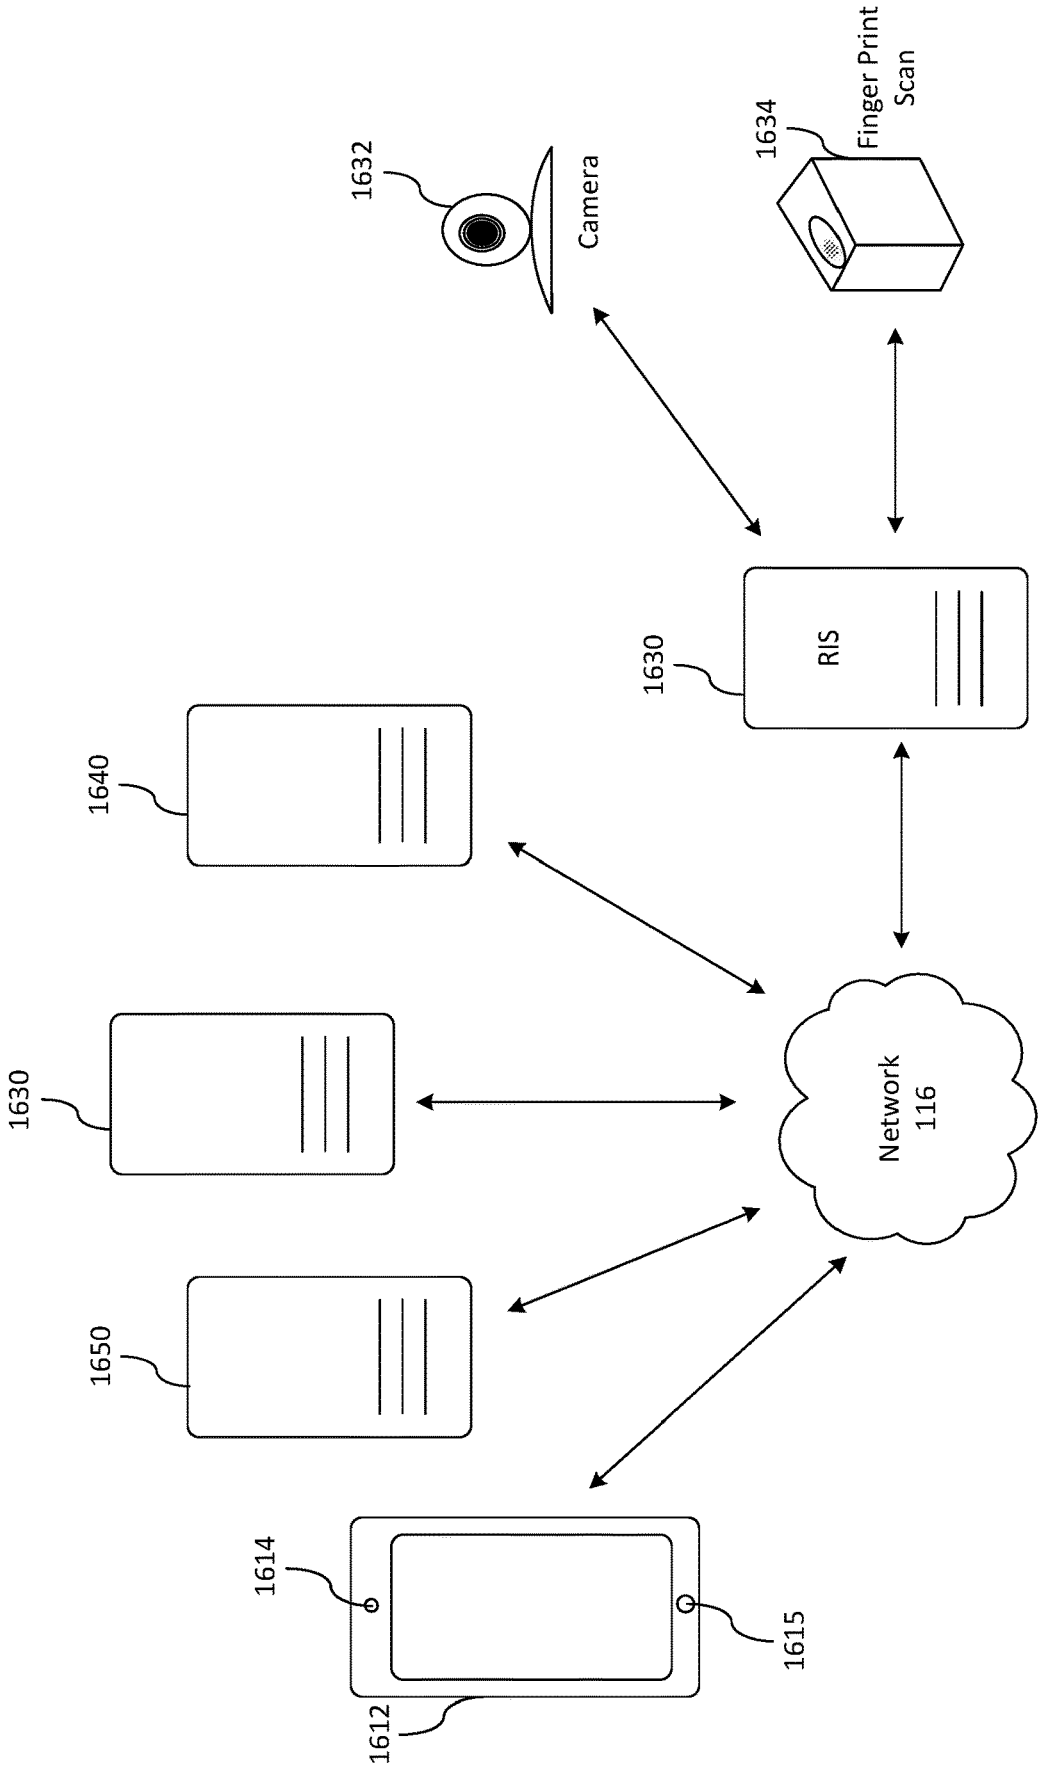

1632
Camera
1634
Finger Print Scan
1630
RIS
1640
1630
Network 116
1650
1614
1615
1612

Fig. 16

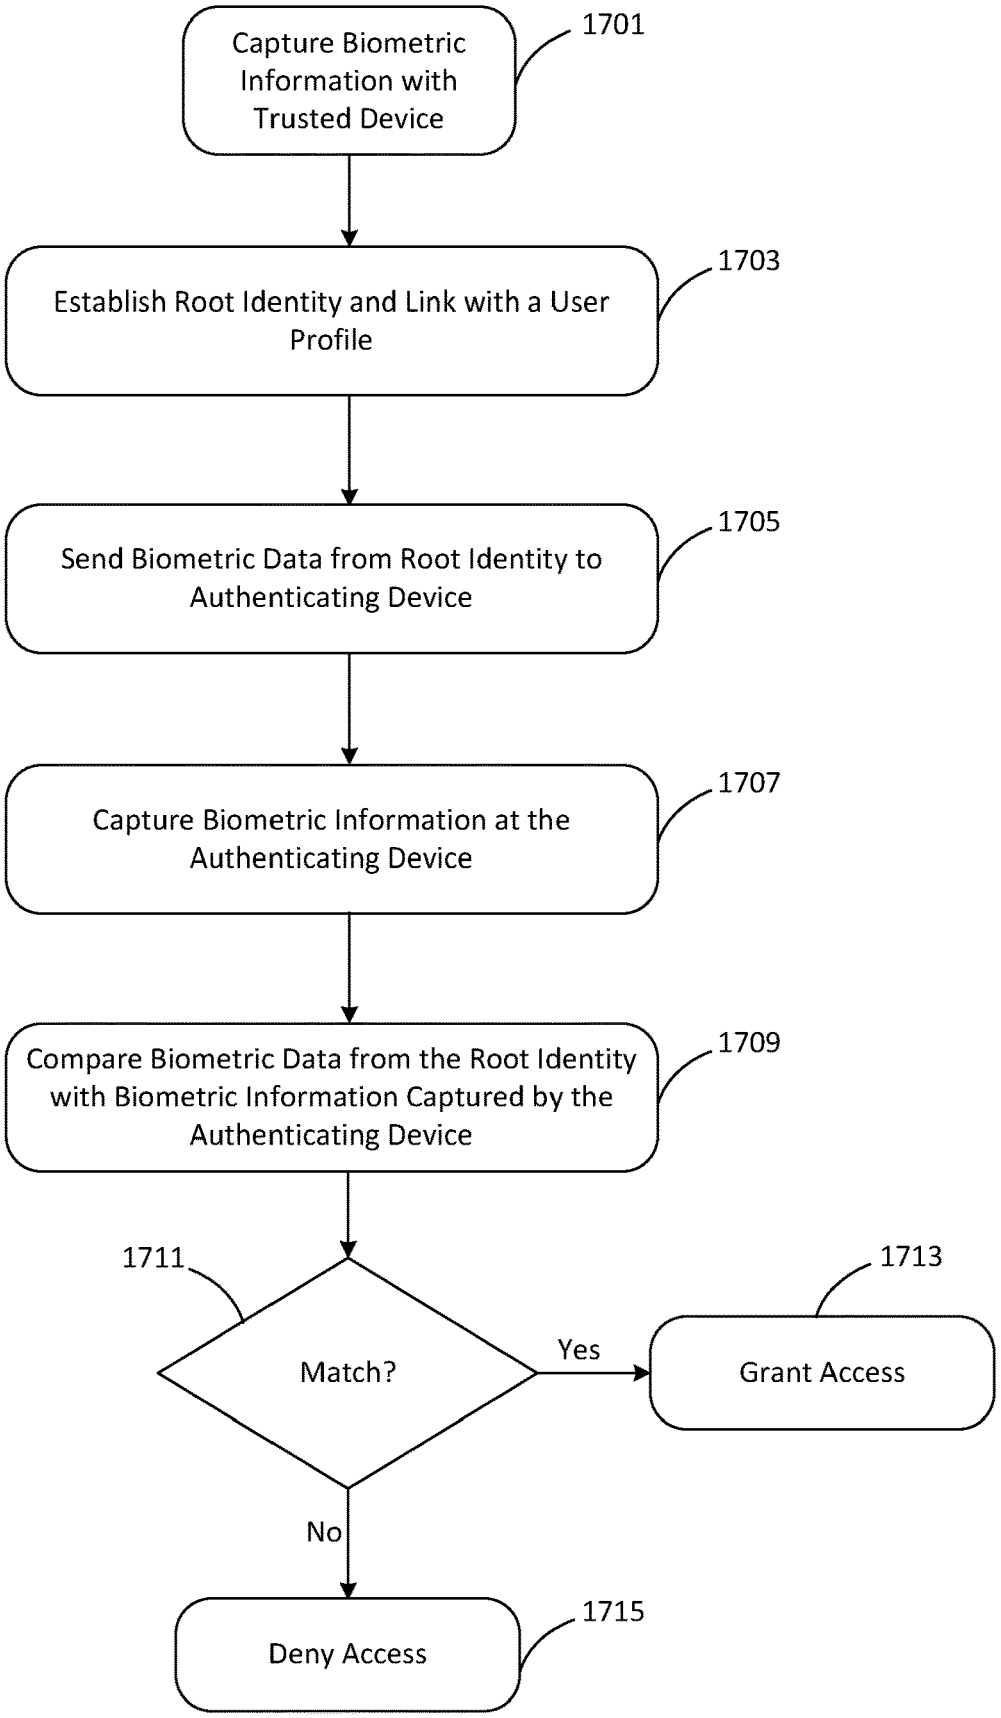

Capture Biometric Information with Trusted Device
1701
Establish Root Identity and Link with a User Profile
1703
Send Biometric Data from Root Identity to Authenticating Device
1705
Capture Biometric Information at the Authenticating Device
1707
Compare Biometric Data from the Root Identity with Biometric Information Captured by the Authenticating Device
1709
1711
Match?
Yes
1713
Grant Access
No
Deny Access
1715

Fig. 17

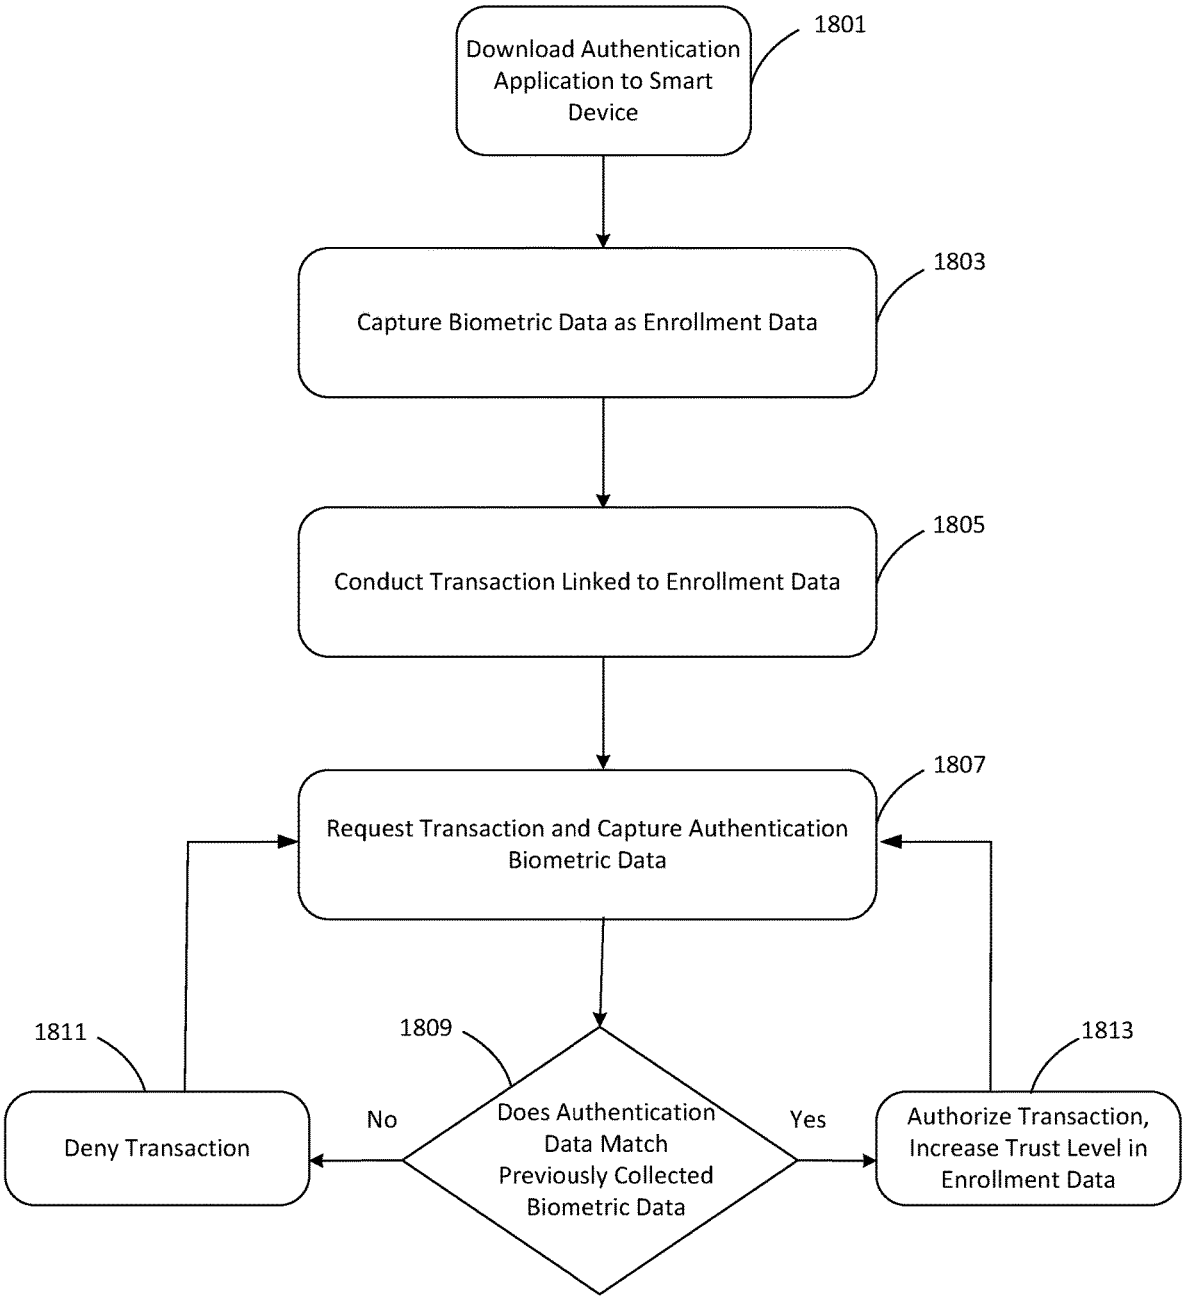

Download Authentication Application to Smart Device
1801
Capture Biometric Data as Enrollment Data
1803
Conduct Transaction Linked to Enrollment Data
1805
Request Transaction and Capture Authentication Biometric Data
1807
1809
Does Authentication Data Match Previously Collected Biometric Data
No
Yes
1811
Deny Transaction
1813
Authorize Transaction, Increase Trust Level in Enrollment Data

Fig. 18

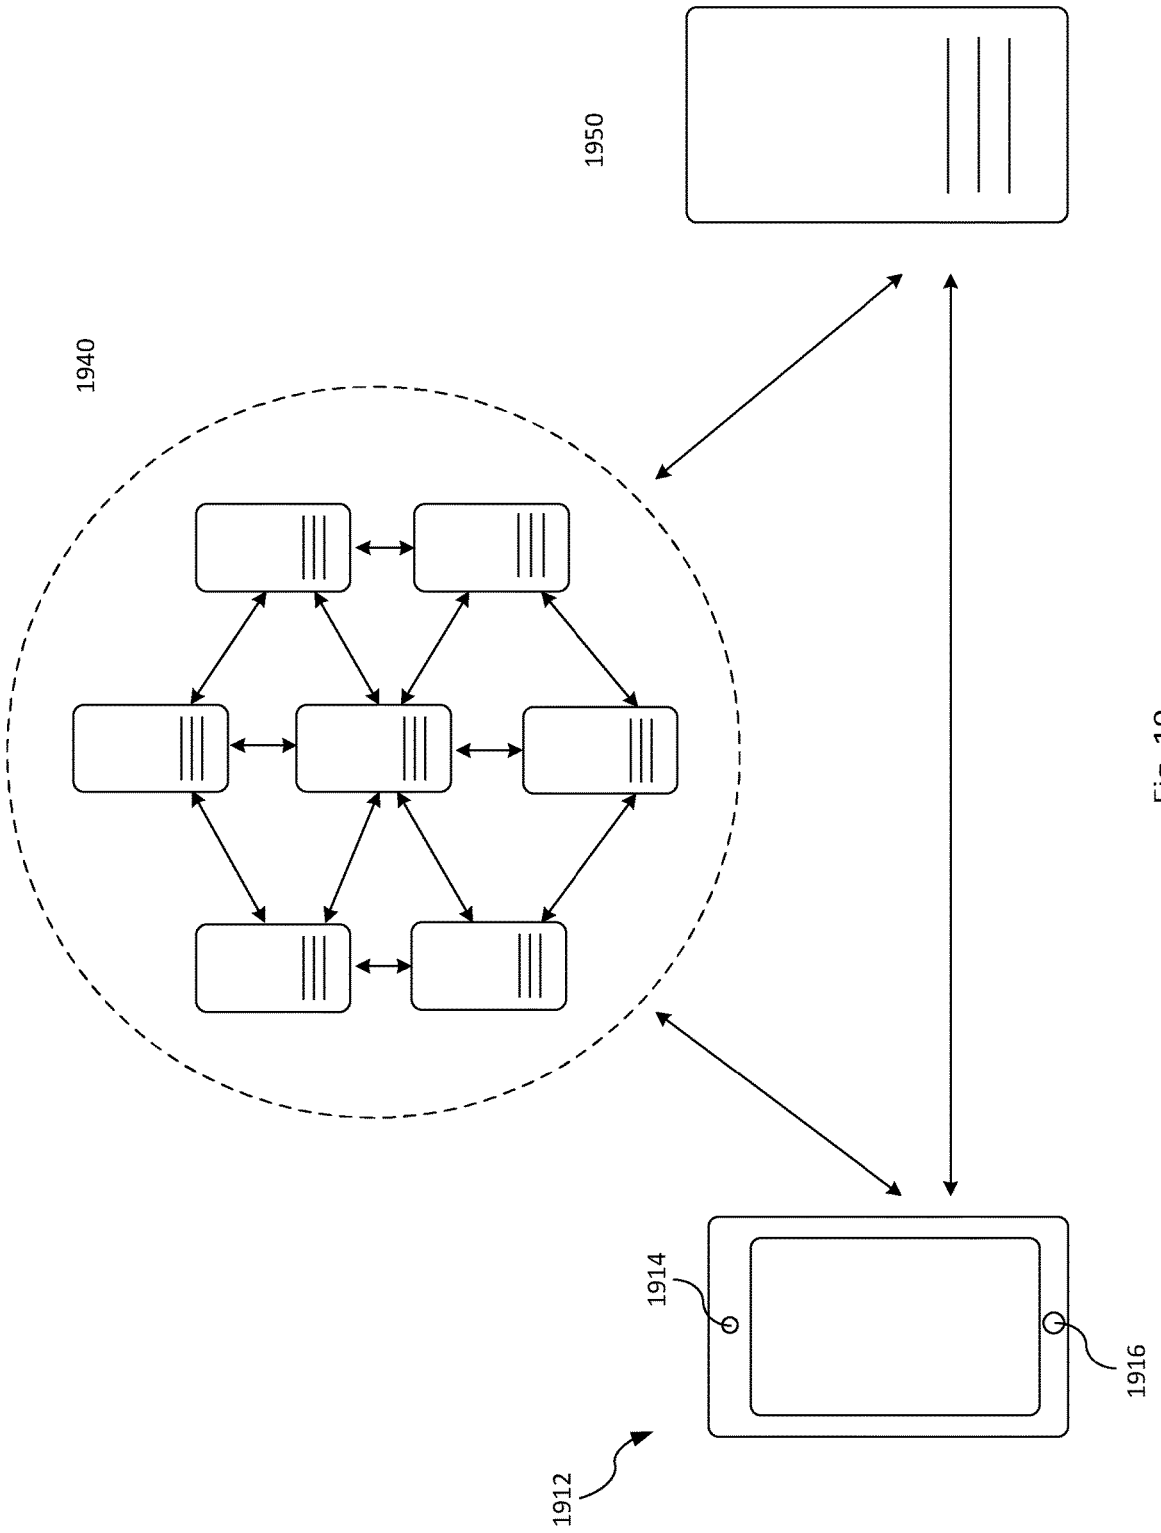


Fig. 19

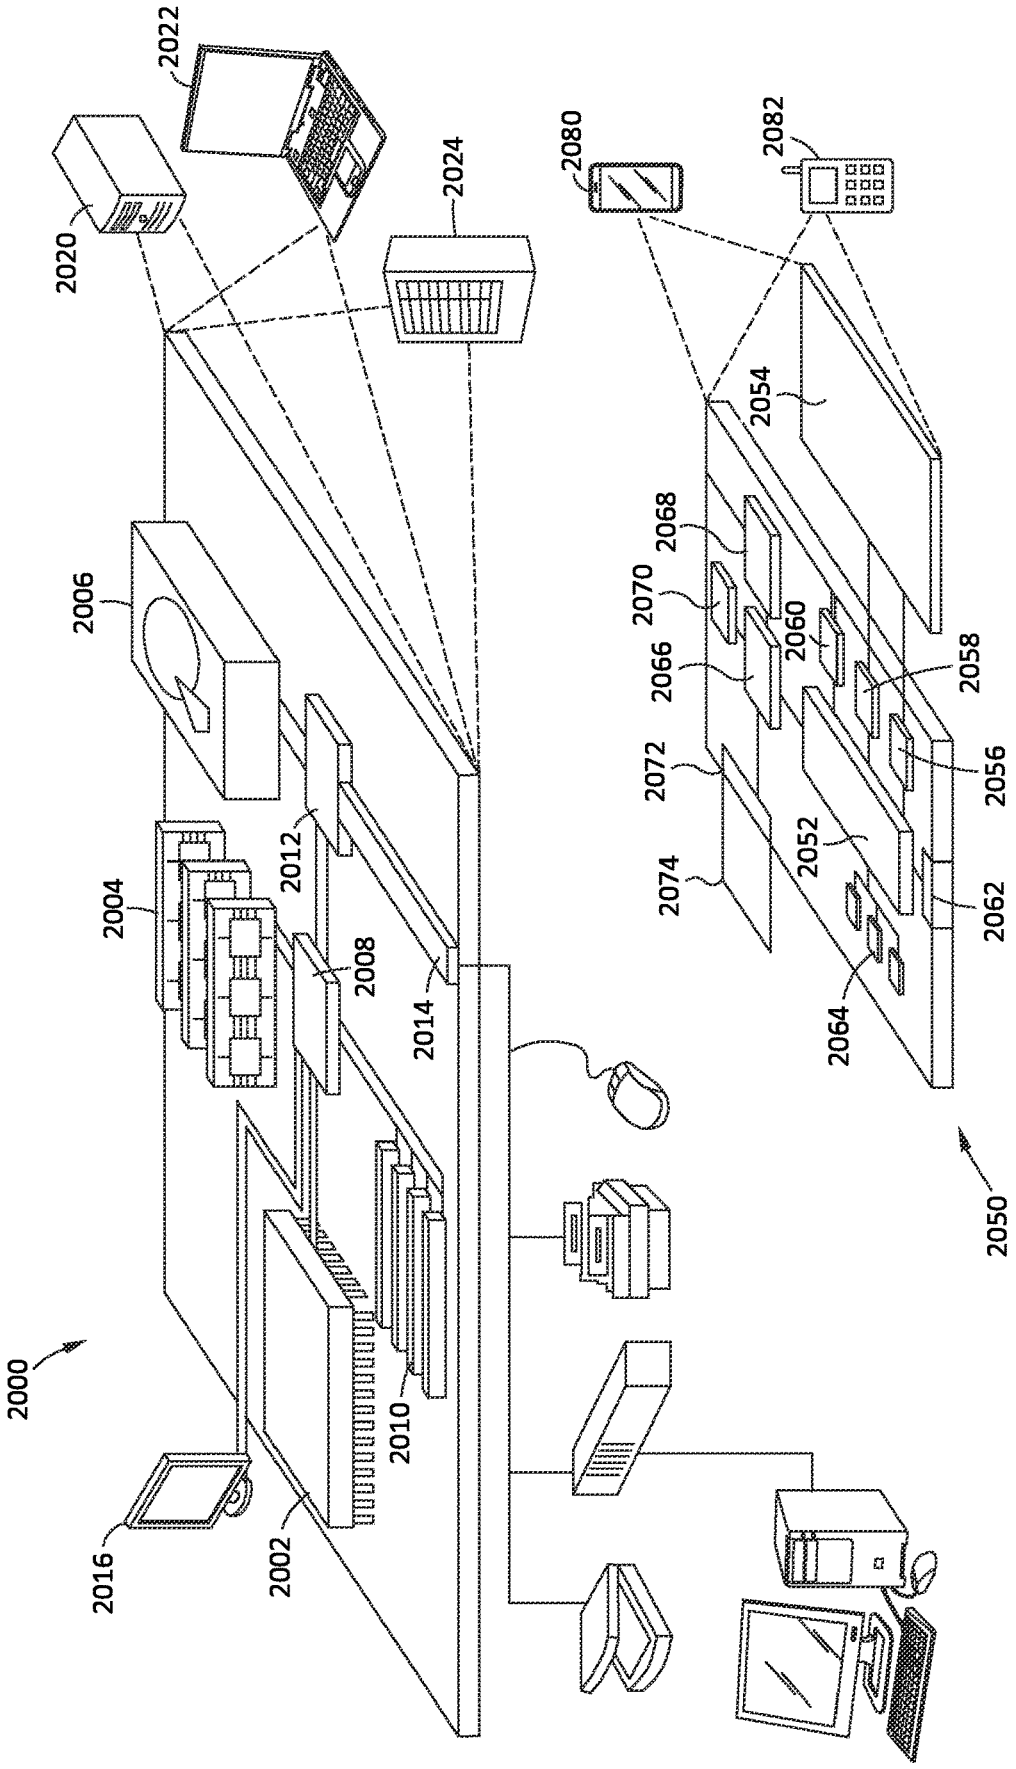

2000
2002
2004
2006
2008
2010
2012
2014
2016
2020
2022
2024
2050
2052
2054
2056
2058
2060
2062
2064
2066
2068
2070
2072
2074
2080
2082

FIG. 20

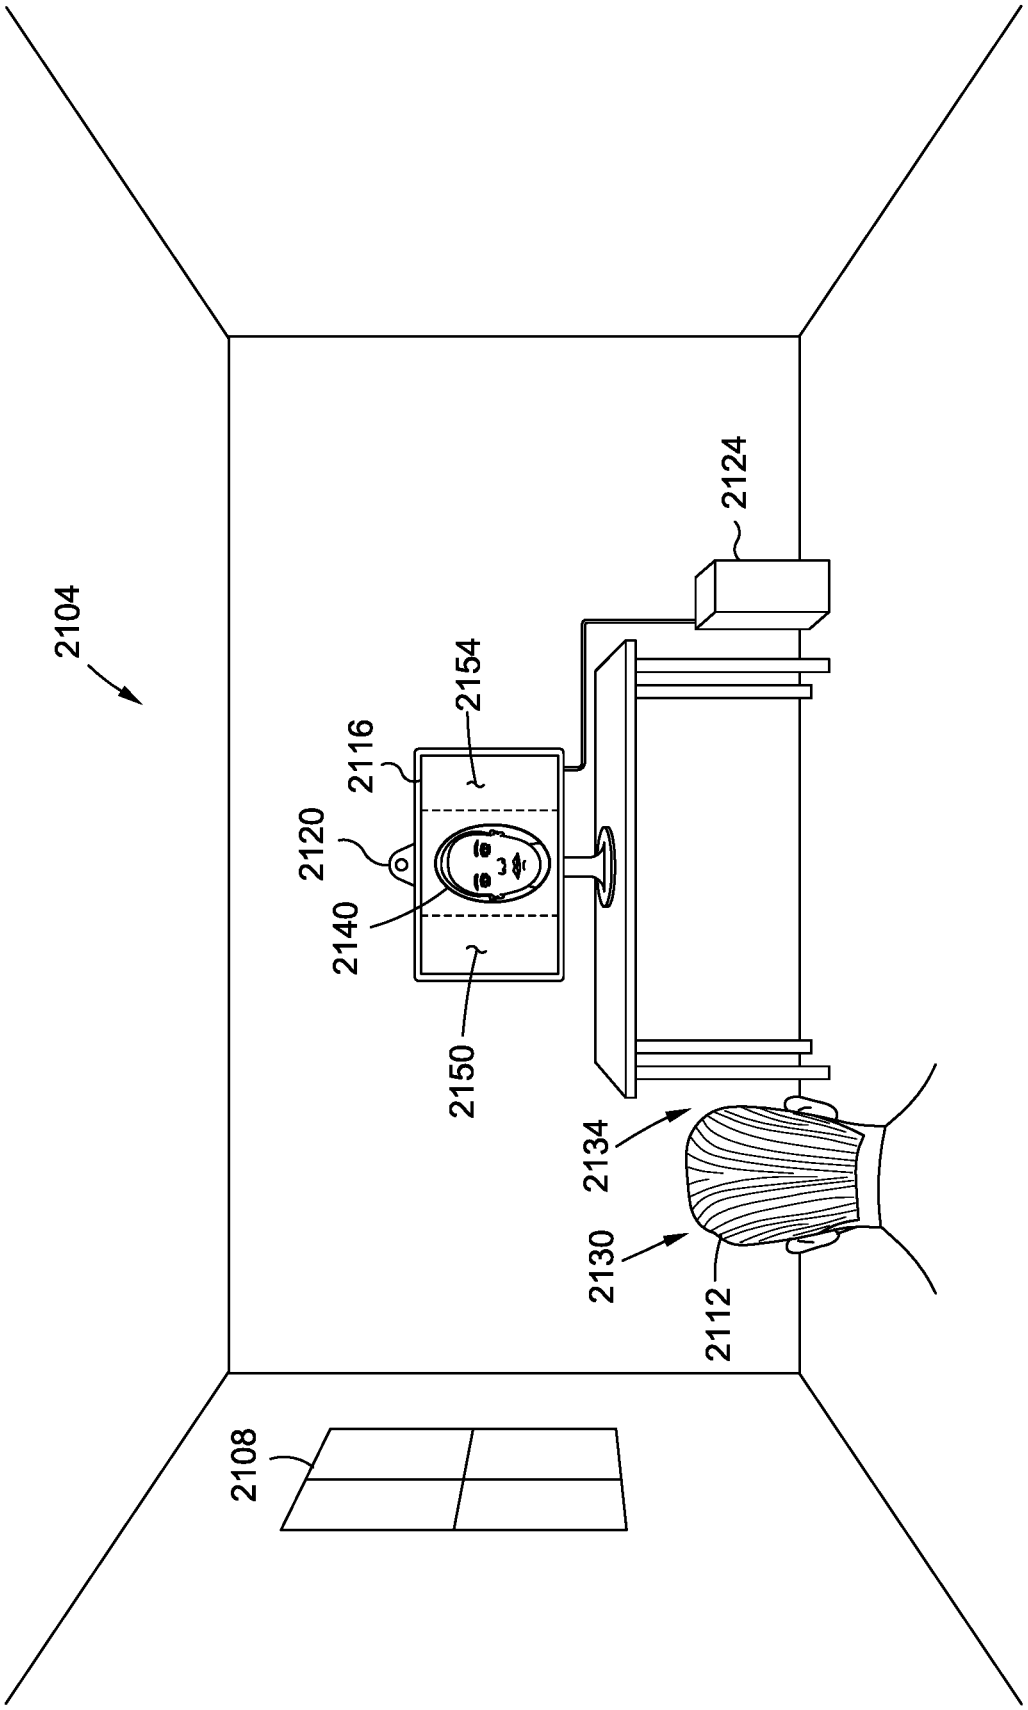


FIG. 21

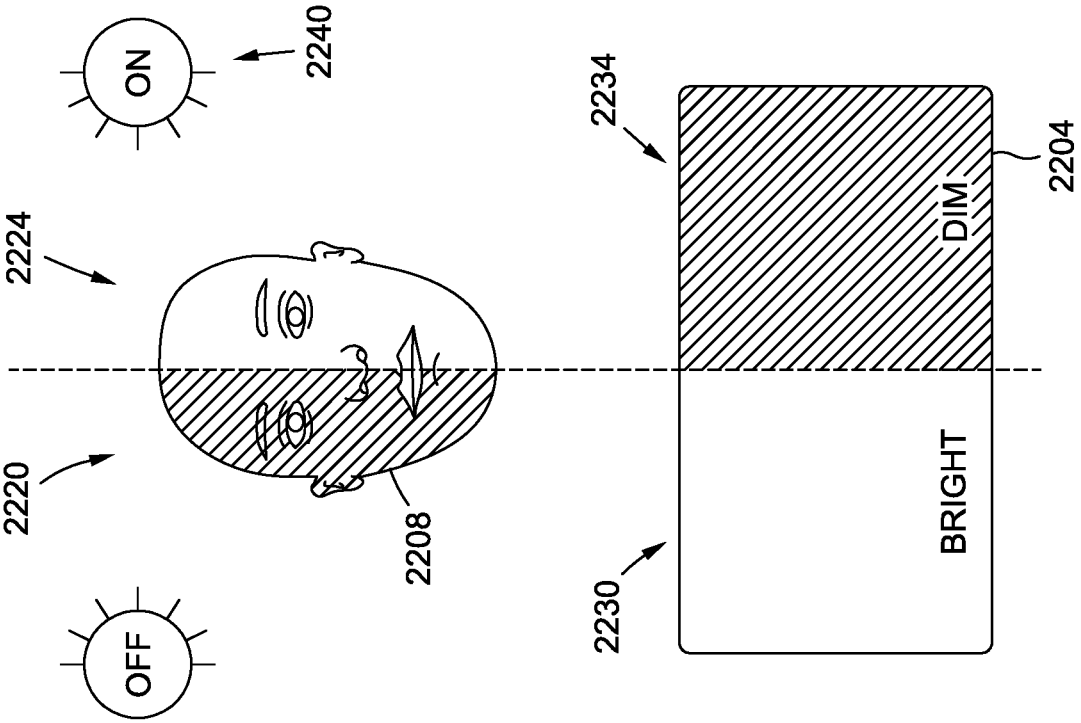


FIG. 22B

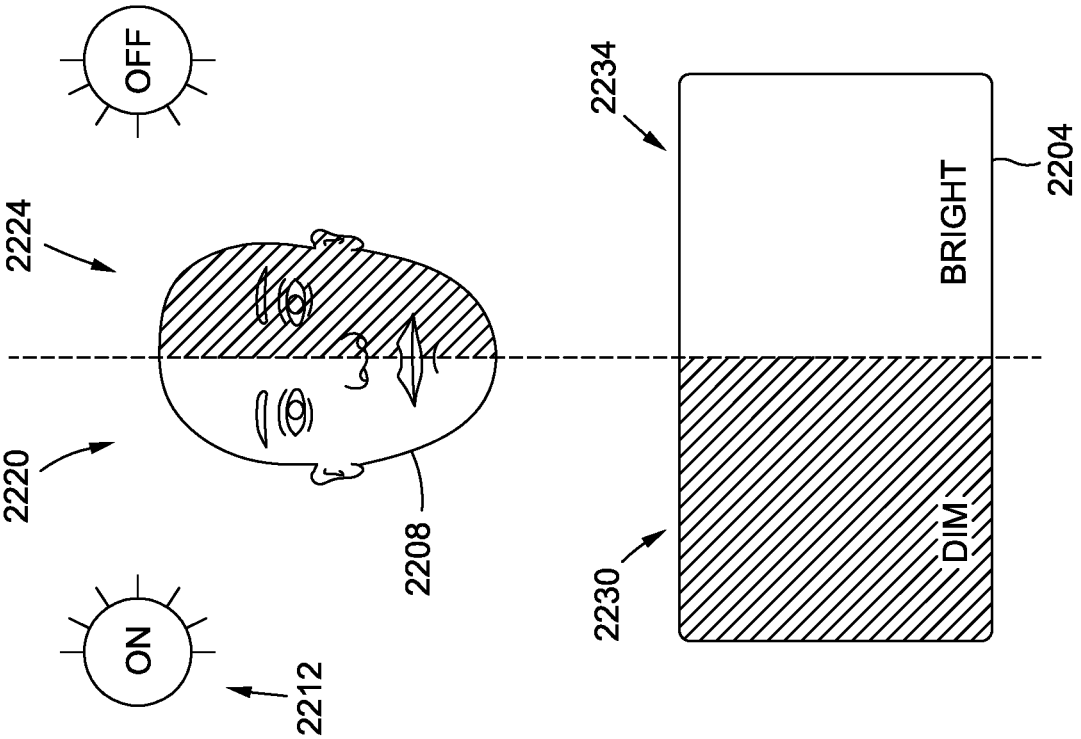


FIG. 22A

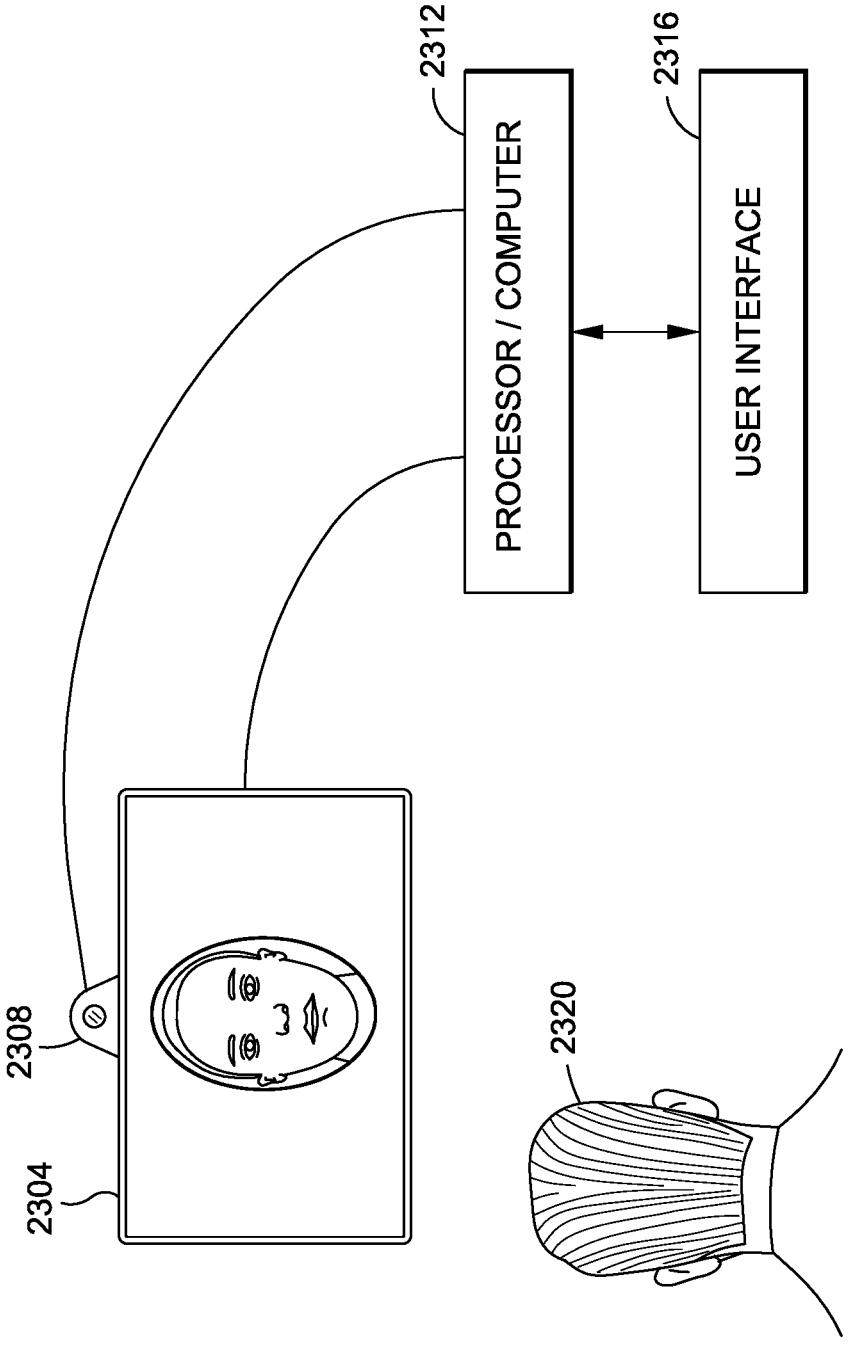

2312
PROCESSOR / COMPUTER
2316
USER INTERFACE
2308
2304
2320

FIG. 23

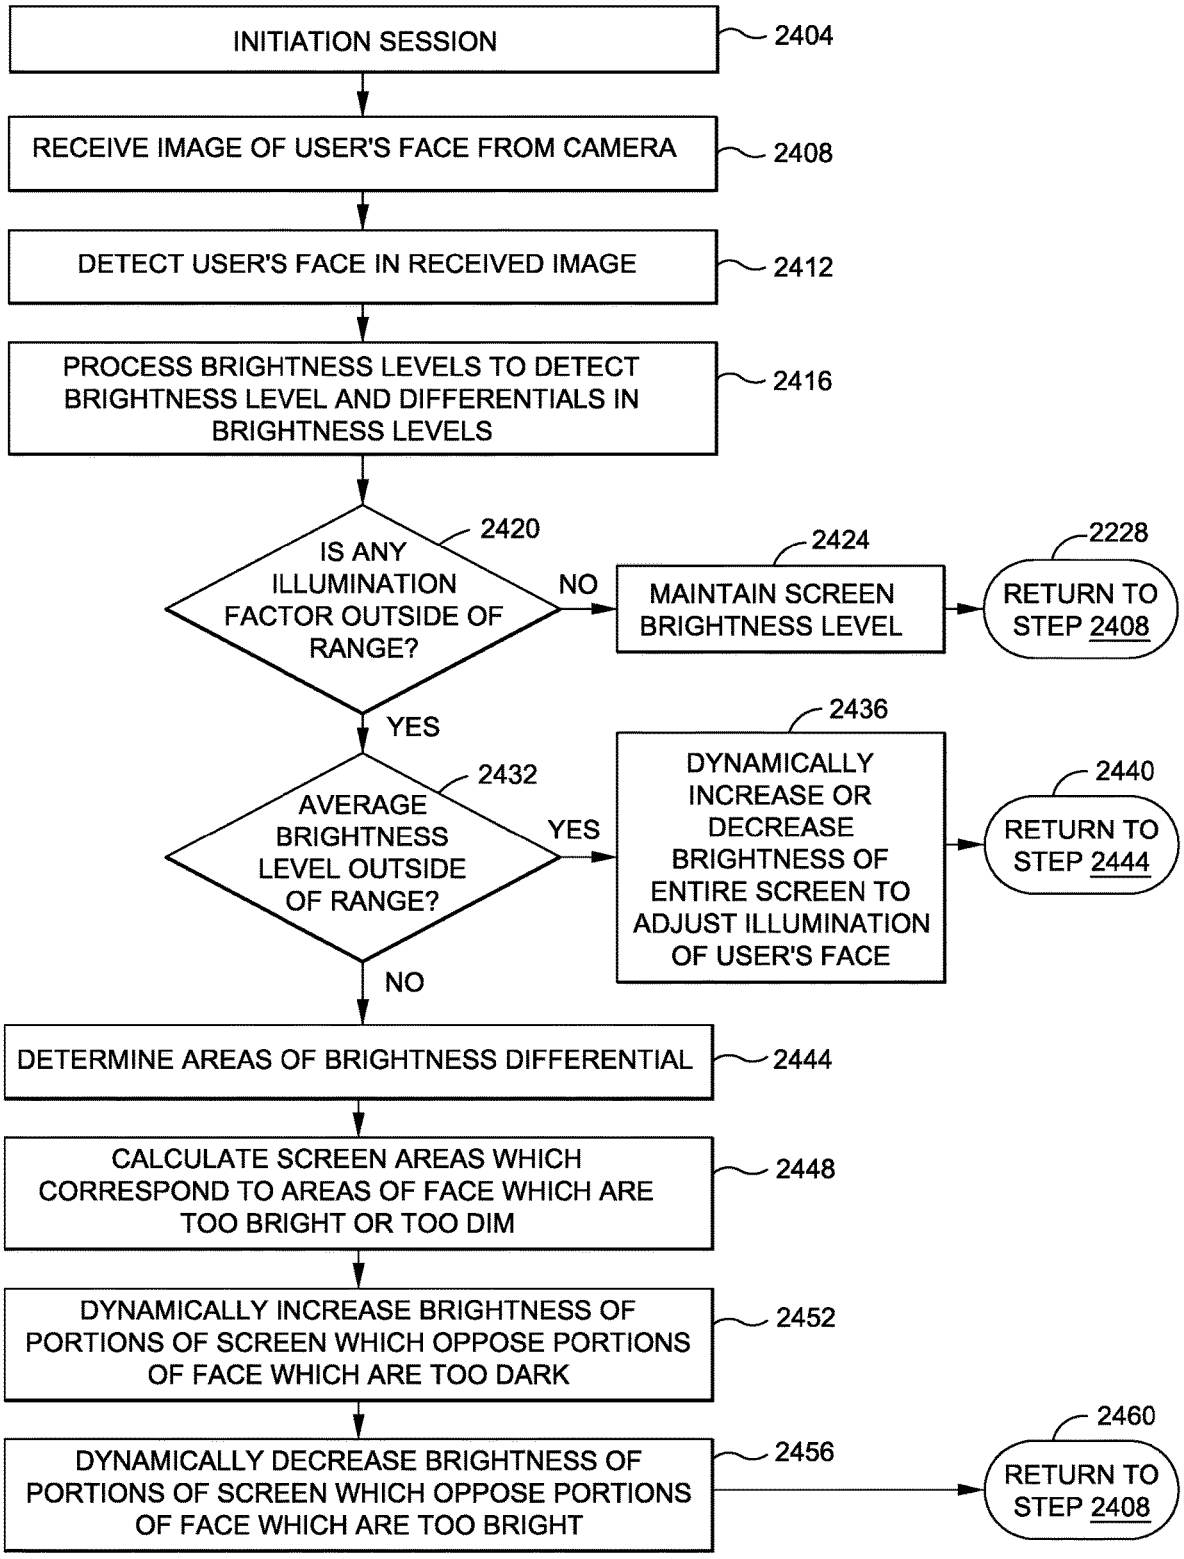

INITIATION SESSION
2404
RECEIVE IMAGE OF USER'S FACE FROM CAMERA
2408
DETECT USER'S FACE IN RECEIVED IMAGE
2412
PROCESS BRIGHTNESS LEVELS TO DETECT BRIGHTNESS LEVEL AND DIFFERENTIALS IN BRIGHTNESS LEVELS
2416
IS ANY ILLUMINATION FACTOR OUTSIDE OF RANGE?
2420
NO
MAINTAIN SCREEN BRIGHTNESS LEVEL
2424
RETURN TO STEP 2408
2228
YES
AVERAGE BRIGHTNESS LEVEL OUTSIDE OF RANGE?
2432
YES
DYNAMICALLY INCREASE OR DECREASE BRIGHTNESS OF ENTIRE SCREEN TO ADJUST ILLUMINATION OF USER'S FACE
2436
RETURN TO STEP 2444
2440
NO
DETERMINE AREAS OF BRIGHTNESS DIFFERENTIAL
2444
CALCULATE SCREEN AREAS WHICH CORRESPOND TO AREAS OF FACE WHICH ARE TOO BRIGHT OR TOO DIM
2448
DYNAMICALLY INCREASE BRIGHTNESS OF PORTIONS OF SCREEN WHICH OPPOSE PORTIONS OF FACE WHICH ARE TOO DARK
2452
DYNAMICALLY DECREASE BRIGHTNESS OF PORTIONS OF SCREEN WHICH OPPOSE PORTIONS OF FACE WHICH ARE TOO BRIGHT
2456
RETURN TO STEP 2408
2460

FIG. 24

METHOD AND APPARATUS TO DYNAMICALLY CONTROL FACIAL ILLUMINATION

BACKGROUND

1. Field

The disclosed embodiments relate to biometric security. More specifically, the disclosed embodiments relate to facial recognition authentication systems.

2. Related Art

With the growth of personal electronic devices that may be used to access many different user accounts, and the increasing threat of identity theft and other security issues, there is a growing need for ways to securely access user accounts via electronic devices. Account holders are thus often required to have longer passwords that meet various criteria such as using a mixture of capital and lowercase letters, numbers, and other symbols. With smaller electronic devices, such as smart phones, smart watches, "Internet of Things" ("IoT") devices and the like, it may become cumbersome to attempt to type such long passwords into the device each time access to the account is desired and if another individual learns the user's password then the user can be impersonated without actually being present themselves. In some instances, users may even decide to deactivate such cumbersome security measures due to their inconvenience on their devices. Thus, users of such devices may prefer other methods of secure access to their user accounts.

One other such method may be with biometrics. For example, an electronic device may have a dedicated sensor that may scan a user's fingerprint to determine that the person requesting access to a device or an account is authorized. However, such fingerprint systems are often prohibitively expensive for use on a small electronic device, or are often considered unreliable and unsecure.

In addition, facial recognition is generally known and may be used in a variety of contexts. Two-dimensional facial recognition is commonly used to tag people in images on social networks or in photo editing software. Facial recognition software, however, has not been widely implemented on its own to securely authenticate users attempting to gain access to an account because it not considered secure enough. For example, two-dimensional facial recognition is considered unsecure because faces may be photographed or recorded, and then the resulting prints or video displays showing images of the user may be used to trick the system. Accordingly, there is a need for reliable, cost-effective, and convenient method to authenticate users attempting to log in to, for example, a user account.

SUMMARY

The disclosed embodiments have been developed in light of the above and aspects of the invention may include a method for enrolling and authenticating a user in an authentication system via a user's a mobile computing device. The user's device includes a camera and at least one movement detecting sensor, such as an accelerometer, magnetometer, and gyroscope.

In one embodiment, the user may enroll in the system by providing enrollment images of the user's face. The enrollment images are taken by the camera of the mobile device as the user moves the mobile device to different positions relative to the user's head. The user may thus obtain enrollment images showing the user's face from different angles and distances. The system may also utilize one or more movement sensors of a mobile device to determine an enrollment movement path that the phone takes during the imaging. At least one image is processed to detect the user's face within the image, and to obtain biometric information from the user's face in the image. The image processing may be done on the user's mobile device or at a remote device, such as an authentication server or a user account server. The enrollment information (the enrollment biometrics, movement, and other information) may be stored on the mobile device or remote device or both.

The system may then authenticate a user by the user providing at least one authentication image via the camera of the mobile device while the user moves the mobile device to different positions relative to the user's head. The authentication images are processed for face detection and facial biometric information. Path parameters may also be obtained during the imaging of the authentication images (authentication movement). The authentication information (authentication biometric, movement, and other information) is then compared with the enrollment information to determine whether the user should be authenticated or denied. Image processing and comparison may be conducted on the user's mobile device, or may be conducted remotely.

In some embodiments, multiple enrollment profiles may be created by a user to provide further security. For example, a user may create an enrollment wearing accessories such as a hat or glasses, or while making a funny face. In further embodiments, the user's enrollment information may be linked to a user's email address, phone number, or other unique identifier.

The authentication system may include feedback displayed on the mobile device to aid a user in learning and authentication with the system. For instance, an accuracy meter may provide feedback on a match rate of the authentication biometrics or movement. A movement meter may provide feedback on the movement detected by the mobile device.

In some embodiments, the system may reward users who successfully utilize the authentication system or who otherwise take fraud preventing measures. Such rewards may include leaderboards, status levels, reward points, coupons or other offers, and the like. In some embodiments, the authentication system may be used to login to multiple accounts.

In addition to biometric and movement matching, some embodiments may also utilize banding detection, glare detection, and screen edge detection to further secure the system. In other embodiments, other user attributes may be detected and matched including users' gender, age, ethnicity, and the like.

The system may also provide gradual access to user account(s) when the user first sets up the authentication system. As the user successfully implements the system, authorization may be expanded. For example, during a time period as the user gets accustomed to the authentication system, lower transaction limits may be applied.

In some embodiments, the mobile device may show video feedback of what the user is imaging to aid the user to image his or her face during enrollment or authentication. The video feedback may be displayed on only a portion of the display screen of the mobile device. For example, the video feedback may be displayed in an upper portion of the display screen. The video feedback display may be position on a

portion of the display screen that corresponds with a location of a front-facing camera of the mobile device.

To facilitate imaging in low-light, portions of the screen other than the video feedback may be displayed in a bright color, such as white. In some embodiments, and LED or infrared light may be used, and near infrared thermal imaging may be done with an infrared camera. The mobile device used for imaging may thus have multiple cameras for capture visible light and infrared images. The mobile device may also have multiple cameras (two or more) imaging in a single spectrum or multiple spectrum to provide stereoscopic, three-dimensional images. In such an embodiment, the close-up frames (zoomed) may create the most differentiation as compared to images captured from a distance. In such an embodiment, the frames captured at a distance may be unnecessary.

In some embodiments, to provide added security, the mobile device may output objects, colors, or patterns on the display screen to be detected during the imaging. The predetermined object or pattern may be a unique one-dimensional or two-dimensional barcode. For example, a QR code (two-dimensional barcode) may be displayed on the screen and reflected off the user's eye. If the QR code is detected in the image, then the person may be authenticated. In other embodiments, an object may move on the screen and the system may detect whether a user's eyes follow the movement.

In some embodiments, the system may provide prompts on a video feedback display to aid the user in moving the device relative to the user's head during enrollment and/or authentication. The prompts may include ovals or frames displayed on the display screen in which the user must place his or her face by moving the mobile device until his or her face is within the oval or frame. The prompts may preferably be of differing sizes and may also be centered on different positions of the screen. When an actual, three-dimensional person images himself or herself close up and far away, it has been found that the biometric results are different due to the barrel distortion effect of the lens at the different distances. Thus, a three-dimensional person may be validated when biometric results are different in the close-up and far away images. This also allows the user to have multiple biometric profiles for each of the distances.

In other embodiments, biometrics from images obtained between the close-up and far away images may be analyzed for incrementally different biometric results. In this manner, the morphing of the face from the far face to the warped close up face is captured and tracked. The incremental frames during an authentication may then be matched to frames captured at similar locations during enrollment along the motion path and compared to ensure that the expected similarities and difference are found. This results in a motion path and captured image and biometric data that can prove a three-dimensional person is presently being imaged. Thus, not only are the close-up and far away biometrics compared, but also biometric data obtained in between. The biometric data obtained in between must also correspond to a correct morphing speed along the motion path, greatly enhancing the security of the system.

The touch screen may be utilized in some embodiments. For example, the user may need to enter or swipe a code or pattern in addition to the authentication system described herein. The touchscreen may also detect a size and orientation of a user's finger, and whether a right hand or a left hand is used on the touch screen. Voice parameters may also be used as an added layer of security. The system may detect edge sharpness or other indicators to ensure that the obtained images are of sufficient quality for the authentication system.

When a camera has an autofocus, the autofocus may be controlled by the system to validate the presence of the actual, three-dimensional person. The autofocus may check that different features of the user or environment focus at different focal lengths. In other embodiments, authentication images may be saved to review the person who attempted to authenticate with the system.

In some embodiments, the match thresholds required may be adapted over time. The system may thus account for changing biometrics due to age, weight gain/loss, environment, user experience, security level, or other factors. In further embodiments, the system may utilize image distortion prior to obtaining biometric information to further protect against fraudulent access.

Also disclosed is a method for verifying biometric authentication comprising receiving root biometric identity information, corresponding to a user, from a trusted biometric information source to establish the root biometric identity information as being trusted and verified. Storing the root biometric identity information in a database and subsequently, during an authentication process, capturing a first image with an authentication camera. The first image is captured when the user is a first distance from the authentication camera. Capturing a second image with the authentication camera, such that the second image is captured when the user is a second distance from the authentication camera. The first distance is different than the second distance. The method of operation also includes processing the first image to create first authentication biometric information and processing the second image to create second authentication biometric information. The method also compares the first authentication biometric information to the second authentication biometric information and compares the root biometric identity information with the first authentication biometric information, the second authentication biometric information, or both. The method will authenticate the user when the comparing determines that the first authentication biometric information matches the second authentication biometric information within a threshold, but are not identical, and the comparing determines that the root biometric identity information matches the first authentication biometric information, the second authentication biometric information, or both within a threshold.

In one embodiment, the authentication camera is one of the following type cameras: camera in a user's mobile device, camera in a user's computer, camera at an ATM machine, camera at a business point of sale, and camera at a financial institution. The trusted biometric information source is a first camera at a trusted source. The first camera may be located at a financial institution or at a government agency office. In one configuration, an authentication server receives the root biometric identity information, the first authentication biometric information, and the second authentication biometric information and the authentication server performs the comparing and authenticating.

In one arrangement, the first image and the second image are of the user's face. As part of a liveness determination, one of the first image and the second image is distorted due to barrel distortion. The method may further comprise performing one or more additional liveness tests on the first image or the second image to verify the user is a live person during the authentication process.

Also disclosed is a method for verifying biometric authentication of a user comprising storing root biometric identity information of the user obtained from a trusted biometric

sensing device which is located at a trusted location to establish the root biometric identity information as trusted and verified. Then, during an authentication session receiving a root biometric identity information, receiving authentication biometric identity information of the user from a computing device during an authentication session, and comparing the root biometric identity information with the authentication biometric identity information. Authenticating the user when the root biometric identity information matches the authentication biometric identity information within a predetermined threshold.

In one embodiment, the trusted biometric sensing device is at one of the following locations: financial institution, business point of sale, or government entity. The computing device that is used during an authentication session is located at a financial institution, ATM, business point of sale, or is the user's mobile device or user's personal computer. In one embodiment, the trusted biometric sensing device includes a camera and the computing device used during an authentication session includes a camera. The root biometric identify information and the authentication biometric identity information is based on a facial image of the user and at least one other item of biometric information.

In one embodiment, this method further comprises capturing supplemental authentication biometric identity information from the user during the authentication session and comparing the supplemental authentication biometric identity information to the authentication biometric identity information. The method also compares the supplemental authentication biometric identity information to the root biometric identify information. The user is authenticated when the comparing determines that the authentication biometric identify information matches the supplemental authentication biometric information within a first threshold, but are not identical, and the comparing determines that the root biometric identity information matches the supplemental authentication biometric information within the predetermined threshold.

Also disclosed is an identity authentication system comprising the following elements. A first computing device configured to request and receive root biometric identity information, for a user, from a trusted source, such that the trusted source is a government affiliated entity or a financial institution. A second computing device configured to, during an authentication session, create authentication biometric information captured from the user during the authentication session, compare the authentication biometric information to the root biometric identity information, and perform a liveness determination on the user during the authentication session using the authentication biometric information. Responsive to the comparing and performing, authenticate the user if the comparing determines the authentication biometric information matches the root biometric identity information within a threshold and the liveness determination determines the user is a live person.

The root biometric identity information may be derived from an image. In one configuration, an image of the user can not be re-created from the root biometric identity information. The first computing device and the second computing device may be the same computing device. It is also contemplated that the authentication biometric information is derived from at least a first image and a second image which are captured by a camera associated with the second computing device. As such, the first image is captured by the camera located at a first distance from the user and the second image captured by the camera located at a second distance from the user, with the second distance less than the first distance. The liveness determination comprises determining if the second image has barrel distortion as compared to the first image.

Also disclosed herein is a method for establishing a trusted biometric profile comprising capturing biometric information from a user when the user makes a financial payment to a third party, the financial payment to a third party creating financial payment data. Then, storing the biometric information from the user with the financial payment data and creating a biometric trust profile associated with the user with the biometric information from the user with the financial payment data to establish trust in the biometric profile.

In one embodiment, capturing biometric information comprises capturing at least a first image at a first distance from the user, processing the first image to create first biometric information, and capturing at least a second image at a second distance from the user such that the second distance is different than the first distance. This embodiment also processes the second image to create second biometric information, and compares the first biometric information to the second biometric information to determine if the first biometric information matches the second biometric information within a threshold. This method may further comprise performing a liveness test as part of the comparison by comparing the first biometric information to the second biometric information to verify the first biometric information is not too similar to the second biometric information.

In one arrangement, the financial payment to the third party is not accepted when the first biometric information does not match the second biometric information within a threshold, or the liveness test determines the biometric information is not from a live person. It is also contemplated that this method may further comprise capturing additional biometric information from a user, in addition to the prior biometric information, when the user makes additional financial payment to a third party. Then, comparing the additional biometric information from a user to the prior biometric information, and responsive to a match between the additional biometric information and the prior biometric information, updating the biometric trust profile to increase the trust associated with the biometric trust profile. However, responsive to a non-match between the additional biometric information and the prior biometric information, updating the biometric trust profile with an indicator of a failed comparison.

The method may further comprise generating a trust score for the user's biometric trust profile, the trust score being determined by at least one of the following: amount of the financial payment, number of financial payments, and age of the biometric trust profile. The biometric trust profile may be shared with or used by other entities to verify an identity of a person based on the biometric trust profile.

Also disclosed is a method for establishing a trusted biometric profile of a user comprising capturing first biometric information from a user when the user performs a first trust building action and processing the first biometric information to generate a biometric information profile. Capturing second biometric information from the user when the user performs a second trust building action and processing the second biometric information to compare first biometric information with the second biometric information. If the processing determines that the first biometric information matches the second biometric information within a threshold, then updating the trusted biometric profile to reflect the match but if the processing determines that the first biometric information does not match the

second biometric information within the threshold, then updating the trusted biometric profile to reflect the failure to match.

In one embodiment, the trust building action is one or more of the following: financial payment, attending place of employment, payments to an escrow account, and doctor appointment. The biometric information profile may include a trust score that is based on biometric information matches, the number of trust building actions, and the nature of the trust building actions.

In one embodiment, the capturing biometric information comprises capturing at least one first image at a first distance from the user, and processing the at least one first image to create the first biometric information. Capturing at least one second image at a second distance from the user such that the second distance is different than the first distance, and processing the at least one second image to create the second biometric information. Then, comparing the first biometric information to the second biometric information to determine if the first biometric information matches the second biometric information within a threshold.

This method may further comprise performing a liveness test as part of the comparison by comparing the first biometric information to the second biometric information to verify the first biometric information is different from the second biometric information due to the change in distance at which the images are captured. In one embodiment, the financial payment to the third party is not accepted when the first biometric information does not match the second biometric information within a threshold and the liveness test determines the biometric information is from a live person. The biometric trust profile may be shared with or used by other entities to verify the identity of the user. It is contemplated that the biometric information is derived from an image of the user's face.

Also disclosed is a system for developing a biometric trust profile based on user action and user biometric information. In one embodiment, this system comprises a first computing device having a camera configured to capture a first image set of the user when the user is making a first financial transaction, process the first image set to create first biometric information, and store the first biometric information as part of a biometric trust profile for the user. A second computing device is also provided which has a camera configured to, or the first computing device is further configured to capture a second image set of the user when the user is making a second financial transaction, process the second image set to create second biometric information, and store the second biometric information as part of a biometric trust profile for the user. A third computing device is configured to compare the first biometric information to the second biometric information, responsive the first biometric information and the second biometric information matching within a predetermined threshold, updating the biometric trust profile to an increased trust level and responsive to the first biometric information to the second biometric information not matching within a predetermined threshold, updating the biometric trust profile to decrease the trust level.

In one embodiment, the first image set, and the second image set comprise at least a close image and a far image, the close image captured when the camera is closer to the user than the far image. The first computing device or the second computing device may be further configured to perform a liveness determination on the second image set to verify the user in the second image set is a live person. In one embodiment, an image of the user can not be re-created from the biometric information. The first computing device and the second computing device may be the same computing device. It is contemplated that the biometric trust profile may include a trust score representing a level of trust for the biometric trust profile such that the trust score is based on one or more of the following: financial transaction amount, number of financial transactions, and how long ago the creation of the first biometric information occurred. In one arrangement, the financial transaction is payment of money to a third party.

Also disclosed is a method for capturing and storing biometric information comprising capturing first biometric information of a user with a computing device, and converting the first biometric information to a first biometric template. Creating a first datablock that is part of a blockchain, such that the first datablock includes the first biometric template and first authentication information. The first datablock is added to the blockchain such that the blockchain exists at numerous locations on numerous different data memories.

In one embodiment, this method further comprises capturing a second biometric information with a computing device and converting the second biometric information to a second biometric template. Then comparing the second biometric template to the first biometric template and responsive to an authentication match between the second biometric template and the first biometric template, creating a second datablock, the second data block including the second biometric template, the second authentication information, and the results of the comparing. Then, adding the second datablock to the blockchain. It is contemplated that the first biometric information may be at least one image of the user captured with a camera and the second biometric information comprises at least one image of the user captured with the camera. In one embodiment, the second biometric information may comprise a first image captured at a first distance from the user and a second image captured at a second distance from the user, the converting may convert the first image to a first image biometric template and convert the second image to a second image biometric template, and the comparing may compare the first image biometric template to the second image biometric template. The authentication match may comprise the first image biometric template matching the second image biometric template within a first threshold and the first image biometric template being different from the second image biometric template within a second threshold.

In one embodiment, the authentication information comprises one or more of the following: device ID, a unique user ID, user identity information, the algorithm type, encryption type, biometric sensor version, date and time stamp, GPS information. This method may further comprise encrypting a datablock when a datablock is added to the blockchain. The method may occur on a user's computing device, on an authentication server, or both. In one arrangement, a datablock is downloaded to a user's computing device from the blockchain and a private key is maintained by the user to decrypt the downloaded datablock. The datablock may further include financial transaction information associated with the authentication match. The comparing and authentication match may occur on a blockchain ledge server. In one embodiment, an image of the user can not be re-created from the root biometric identity information.

Also disclosed herein is a method for authenticating a user with a computing device. The computing device has a camera and display screen. This method includes capturing one or more images of a user's face with a camera associated

with the computing device and processing the image to identify the user's face in the one or more images. Then, processing the image to evaluate an illumination level of a first portion (area) of the user's face and an illumination level of a second portion of the user's face in the one or more images. Responsive to an illumination level of the first portion (area) or second portion (area) of the user's face being below a threshold illumination level, determine a first portion of a screen which opposes the first portion of the user's face and a second portion of the screen which opposes the second portion of the user's face. Responsive to the first portion of the user's face having an illumination level below the threshold illumination level, increasing the brightness of the first portion of the screen and, responsive to the second portion of the user's face having an illumination level below the threshold illumination level, increasing the brightness of the second portion of the screen. In one embodiment, one area of the screen would decrease in brightness while another area of the screen will increase in brightness. For example, such an embodiment, if the whole screen starts at 60% brightness then one side goes to 10% and the other goes to 100%. This provides more dynamic range on the screen and the difference in light output between the two areas of the screen compensate for the uneven environmental light. This in turn reduced the dynamic range of relative brightness across the user's face.

In one embodiment, the authenticating determines liveness and three dimensionality detection. The method of claim **1** wherein the authentication is three dimensionality detection and identity verification. In one configuration, the one or more images comprises a first image and a second image and the method further comprises comparing the first image to the second image to evaluate differences between the first image and the second image to verify that the one or more images, which are two-dimensional, are not captured from a two-dimensional picture, but are actually captured from a person, which has a three-dimensional face. This is achieved through analysis or the one or more photos for generation loss and perspective distortion.

Thereafter, comparing the first image, the second image, or both to a previously captured and stored image to verify identify of the user. In one embodiment, the one or more images comprise a first image and a second image and capturing the second image occurs with a distance between the user's face and the camera that is different than a distance between the user's face and the camera when the first image is captured. Alternatively, the method may further comprise detecting portions of the user's face which are at an illumination level that is greater than a maximum illumination level and decreasing screen brightness at portions of the screen which oppose the portions of the user's face which are at an illumination level that is greater than a maximum illumination level. For example, the user's face can be "washed out" in the captured image due to overly bright illumination such that the sensor can't pick up the detail in the skin. The opposite may also occur such that if is the user's skin in the captured image is so dark that the camera sensor isn't getting enough detail for the system algorithms to make a decision. Thus, there are maximum and/or minimum allowable illumination level, based on the camera's ability to capture enough facial detail to provide a positive match, or perform the liveness detection checks.

It is also contemplated that this method may further include balancing the illumination of the user's face by also reducing brightness of a portion of the screen that does not having its brightness level increased.

Also disclosed is a system for dynamically balancing illumination of a user's face during an authentication session. In one embodiment, this system includes a computing device that includes a screen, a camera, a processor, and a memory, the memory configured with non-transitory processor executable code capable of being executed by the processor. The processor executable code is configured to capturing images of the user's face with the camera during an authentication session, such that the user's face is facing the screen; and analyze brightness levels of the user's face in the images in relation to one or more thresholds. Responsive to the brightness levels of the user's face in the images being outside of one of the one or more thresholds, controlling screen brightness to establish the brightness levels of the user's face to be within the one or more thresholds. This method continues to monitor the brightness levels of the user's face during the authentication session and dynamically adjusting screen brightness to maintain the brightness levels of the user's face in the images to be within the one or more thresholds. It should be noted that the dynamic adjustments to the screen brightness adjust for the skin tones of the user to reach a state of illumination of the user's skin, taking into account skin tone, so that the camera can collect adequate detail. Thus, the system is designed to compensate and dynamically adjust to provide an optimal facial brightness for users of all skin tones.

In one embodiment, the processor executable code is configured to calculate a brightness differential between the bright area of the user's face and the dark areas of the user's face in an image and if the brightness differential exceeds a brightness differential threshold, then increasing brightness of one or more portions of a screen that oppose the dark areas of the user's face. The processor executable code may be further configured to decrease brightness of one or more portions of the screen that oppose the bright area of the user's face. It is contemplated that the one or more thresholds may include maximum brightness threshold, minimum brightness threshold, and a brightness differential threshold.

In one variation, capturing images of the user's face during an authentication session comprises capturing at least one image at a first distance between the user's face and the camera and capturing at least one image at a second distance between the user's face and the camera, the first distance different than the second distance. In one embodiment, authentication includes comparing the at least one image captured at a first distance to the at least one image captured at a second distance to expected differences and only authenticating when the expected differences resulting from the change in distance are present in the comparison. This system may be configured to dynamically adjust screen brightness to maintain the brightness levels of the user's face in the images within the one or more thresholds by adjusting a portion of the screen brighter while leaving a portion of the screen unchanged.

Also disclosed herein is a method for balancing illumination of a user's face during an authentication session comprising capturing images of a user's face with a computing device. The computing device includes a camera, screen, a processor, and memory with the memory configured with non-transitory machine executable code executable by the processor. The code is configured to monitoring the brightness levels of the user's face in the image to determine if one or more portions of user's face have brightness levels that are outside of a range of brightness levels suitable for authentication processing, such as liveness detection and/or three dimensionality detection. This may include automatically dimming the screen as the user

brings the mobile device closer to their face due to the facing receiving greater illumination the closer the screen is to the face. For example, the intensity of light is inversely proportional to the square of the distance.

Responsive to the monitoring determining that one or more portions of the user's face have brightness levels that are outside of the range of brightness levels suitable for authentication processing, dynamically increasing or decreasing brightness of one or more screen areas to establish the brightness levels of the user's face within the range of brightness levels suitable for authentication processing.

In one embodiment, the brightness levels suitable for authentication processing (which may include liveness detection) include a brightness differential between the bright areas of the user's face and dark areas of the user's face. The step of dynamically increasing or decreasing brightness of one or more screen areas may comprise increasing brightness of screen areas which oppose areas of the user's face which have brightness levels which are below the range of brightness levels suitable for authentication processing. In one variation, dynamically increasing or decreasing brightness of one or more screen areas comprises decreasing brightness of screen areas which oppose areas of the user's face which have brightness levels which are above the range of brightness levels suitable for authentication processing.

It is also contemplated that the monitoring and dynamically increasing or decreasing brightness of one or more screen areas occurs in real time during the authentication session to adjust to changes in illumination of the user's face which occur during the authentication session. As discussed herein the authentication session may include capturing a first image with the camera spaced or separated from the user's face by a first distance and capturing a second image with the camera separated from the user's face by a second distance, the second distance being different than the first distance. This step also adjust screen brightness, before image capture, during image capture of the first image and the second image, and/or between capture of the first image and the second image, to maintain facial illumination within a range which causes the user's face in the first image and the second image to be at a brightness level that is within a predetermined range of brightness levels which are suitable for authentication processing.

The system may utilize any number or combination of the security features as security layers, as described herein. When authentication fails, the system may be configured so that it is unclear which security layer triggered the failure to preserve the integrity of the security system.

Other systems, methods, features and advantages of the invention will be or will become apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the invention, and be protected by the accompanying claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention. In the figures, like reference numerals designate corresponding parts throughout the different views.

FIG. **1** illustrates an example environment of use of the facial recognition authentication system, according to one exemplary embodiment.

FIG. **2** illustrates an example embodiment of a mobile device.

FIG. **3** illustrates exemplary software modules that are part of the mobile device and server.

FIG. **4** shows a method for performing facial recognition authentication according to one embodiment.

FIG. **5** shows a method for enrolling a user in a facial recognition authentication system, according to one exemplary embodiment.

FIGS. **6**A and **6**B show an example of movement of a mobile device about a user's face according to one exemplary embodiment.

FIGS. **7**A and **7**B show an example of movement of a mobile device about a user's face according to one exemplary embodiment.

FIG. **8** shows a method of providing authentication information in a facial recognition authentication system, according to one exemplary embodiment.

FIG. **9** shows a method of verifying authentication credential in a facial recognition authentication system, according to one exemplary embodiment.

FIG. **10** illustrates an exemplary display showing a graphical and numeric feedback in a facial recognition authentication system.

FIGS. **11**A, **11**B, and **11**C illustrate exemplary video feedback displays corresponding to front-facing camera positions in a facial recognition authentication system.

FIG. **12** shows an exemplary video display feedback of a facial recognition authentication system where edge pixels on the sides of the display are stretched horizontally.

FIGS. **13**A and **13**B illustrates exemplary screen displays with face alignment indicators shown as an oval to serve as a guide as the user moves the mobile device closer to or away from their face.

FIG. **14** illustrates an exemplary mobile device display showing a graphical code entry interface with an imaging area.

FIG. **15** illustrates an example mobile device display showing a numeric and graphical code entry interface with an imaging area.

FIG. **16** shows a system for biometric identification using root identity information, according to an exemplary embodiment.

FIG. **17** shows a method for authenticating using a root identification system, according to one exemplary embodiment.

FIG. **18** shows a method of remotely establishing a biometric identity, according to one exemplary embodiment.

FIG. **19** shows a system of biometric authentication using a blockchain, according to an exemplary embodiment.

FIG. **20** is a schematic of a computing or mobile device such as one of the devices described above, according to one exemplary embodiment.

FIG. **21** illustrates an example environment of use of the dynamic facial illumination system.

FIG. **22**A illustrates on example of the dynamic adjustment of portion of the screen based on a sensed brightness of the captured image of the user's face.

FIG. **22**B illustrates on example of the dynamic adjustment of portion of the screen based on a sensed brightness of the captured image of the user's face.

FIG. **23** illustrates an exemplary system for dynamic screen brightness.

FIG. **24** is an operational flow diagram of an exemplary method of operation.

DETAILED DESCRIPTION OF EMBODIMENTS

A system and method for providing secure and convenient facial recognition authentication will be described below.

The system and method may be achieved without the need for additional expensive biometric readers or systems while offering enhanced security over conventional facial recognition systems.

Facial Recognition Authentication Environment

FIG. **1** illustrates an example environment of use of the facial recognition authentication system described herein. This is but one possible environment of use and system. It is contemplated that, after reading the specification provided below in connection with the figures, one of ordinary skill in the art may arrive at different environments of use and configurations.

In this environment, a user **108** may have a mobile device **112** which may be used to access one or more of the user's accounts via authentication systems. A user **108** may have a mobile device **112** that can capture a picture of the user **108**, such as an image of the user's face. The user may use a camera **114** on or connected to the mobile device **112** to capture an image or multiple images or video of himself or herself. The mobile device **112** may comprise any type of mobile device capable of capturing an image, either still or video, and performing processing of the image or communication over a network.

In this embodiment, the user **108** may carry and hold the mobile device **112** to capture the image. The user may also wear or hold any number of other devices. For, example, the user may wear a watch **130** containing one or more cameras **134** or biosensors disposed on the watch. The camera **134** may be configured to create an image from visible light as well as infrared light. The camera **134** may additionally or alternatively employ image intensification, active illumination, or thermal vision to obtain images in dark environments.

When pointed towards a user **108**, the camera **134** may capture an image of the user's face. The camera **134** may be part of a module that may either include communication capability that communicates with either a mobile device **112**, such as via Bluetooth®, NFC, or other format, or communication directly with a network **116** over a wired or wireless link **154**. The watch **130** may include a screen on its face to allow the user to view information. If the camera module **134** communicates with the mobile device **112**, the mobile device **134** may relay communications to the network **116**. The mobile device **134** may be configured with more than one front facing camera **114** to provide for a 3D or stereoscopic view, or to obtain images across different spectral ranges, such as near infrared and visible light.

The mobile device **112** is configured to wirelessly communicate over a network **116** with a remote server **120**. The server **120** may communicate with one or more databases **124**. The network **116** may be any type of network capable of communicating to and from the mobile device including but not limited to a LAN, WAN, PAN, or the Internet. The mobile device **112** may communicate with the network via a wired or wireless connection, such as via Ethernet, Wi-Fi, NFC, and the like. The server **120** may include any type of computing device capable of communicating with the mobile device **112**. The server **120** and mobile device **112** are configured with a processor and memory and are configured to execute machine readable code or machine instructions stored in the memory.

The database **124**, stored on mobile device or remote location as shown, may contain facial biometric information and authentication information of users **108** to identify the users **108** to allow access to associated user data based on one or more images or biometric information received from the mobile device **112** or watch **134**. The data may be, for example, information relating to a user account or instruction to allow access to a separate account information server **120**B. The term biometric data may include among other information biometric information concerning facial features and path parameters. Examples of path parameters may include an acceleration and speed of the mobile device, angle of the mobile device during image capture, distance of the mobile device to the user, path direction in relation to the user's face position in relation to the user, or any other type parameter associated with movement of the mobile device or the user face in relation to a camera. Other data may also be included such as GPS data, device identification information, and the like.

In this embodiment, the server **120** processes requests for identification from the mobile device **112** or user **108**. In one configuration, the image captured by the mobile device **112**, using facial detection, comprises one or more images of the user's face **108** during movement of the mobile device relative to the user's face, such as in a side to side or horizontal arc or line, vertical arc or line, forward and backwards from the user's face, or any other direction of motion. In another configuration, the mobile device **112** calculates biometric information from the obtained images, and sends the biometric information to the server **120**. In yet another embodiment, the mobile device **112** compares biometric information with stored biometric information on the mobile device **112**, and sends an authentication result from the comparison to the server **120**.

The data including either the image(s), biometric information, or both are sent over the network **116** to the server **120**. Using image processing and image recognition algorithms, the server **120** processes the person's biometric information, such as facial data, and compares the biometric information with biometric data stored in the database **124** to determine the likelihood of a match. In other embodiments, the image processing and comparison is done on the mobile device **112**, and data sent to the server indicates a result of the comparison. In further embodiments, the image processing and comparison is done on the mobile device **112** without accessing the server, for example, to obtain access to the mobile device **112** itself.

By using facial recognition processing, an accurate identity match may be established. Based on this and optionally one or more other factors, access may be granted, or an unauthorized user may be rejected. Facial recognition processing is known in the art (or is an established process) and as a result, it is not described in detail herein.

Also shown is a second server **120**B with associated second database **124**B, and third server **120**C with associated third database **124**C. The second and third database may be provided to contain additional information that is not available on the server **120** and database **124**. For example, one of the additional servers may only be accessed based on the authentication of the user **108** performed by the server **120**.

Executing on the mobile device **112** is one or more software applications. This software is defined herein as an identification application (ID App). The ID App may be configured with either or both of facial detection and facial recognition and one or more software modules which monitor the path parameters and/or biometric data. Facial detection as used herein refers to a process which detects a face in an image. Facial recognition as used herein refers to a process that can analyze a face using an algorithm, mapping its facial features, and converting them to biometric data, such as numeric data. The biometric data can be compared to that derived from one or more different images for

similarities or dis-similarities. If a high percentage of similarity is found in the biometric data, the individual shown in the images may be considered a match.

With the ultimate goal of matching a face of a user to an identity or image stored in a database **124**, to authenticate the user, the ID App may first process the image captured by the camera **114**, **134** to identify and locate the face that is in the image. As shown in FIG. **1**, there may be the face **108**. The authentication may be used for logging into an online account or for numerous other access control functions.

The portion of the photo that contains the detected face may then be cropped, cut, and stored for processing by one or more facial recognition algorithms. By first detecting the face in the image and cropping only that portion of the face, the facial recognition algorithm need not process the entire image. Further, in embodiments where the facial recognition processing occurs remotely from the mobile device **112**, such as at a server **120**, much less image data is required to be sent over the network to the remote location. It is contemplated that the entire image, a cropped face, or only biometric data may be sent to the remote server **120** for processing.

Facial detection software can detect a face from a variety of angles. However, facial recognition algorithms are most accurate in straight on images in well-lit situations. In one embodiment, the highest quality face image for facial recognition that is captured is processed first, then images of the face that are lower quality or at different angles other than straight toward the face are then processed. The processing may occur on the mobile device or at a remote server which has access to large databases of image data or facial identification data.

The facial detection is preferred to occur on the mobile device and is performed by the mobile device software, such as the ID App. This reduces the number or size of images (data) that are sent to the server for processing where faces are not found and minimizes the overall amount of data that must be sent over the network. This reduces bandwidth needs and network speed requirements are reduced.

In another preferred embodiment, the facial detection, facial recognition, and biometric comparison all occur on the mobile device. However, it is contemplated that the facial recognition processing may occur on the mobile device, the remote server, or both.

FIG. **2** illustrates an example embodiment of a mobile device. This is but one possible mobile device configuration and as such it is contemplated that one of ordinary skill in the art may differently configure the mobile device. The mobile device **200** may comprise any type of mobile communication device capable of performing as described below. The mobile device may comprise a PDA, cellular telephone, smart phone, tablet PC, wireless electronic pad, an IoT device, a "wearable" electronic device or any other computing device.

In this example embodiment, the mobile device **200** is configured with an outer housing **204** configured to protect and contain the components described below. Within the housing **204** is a processor **208** and a first and second bus **212**A, **212**B (collectively **212**). The processor **208** communicates over the buses **212** with the other components of the mobile device **200**. The processor **208** may comprise any type processor or controller capable of performing as described herein. The processor **208** may comprise a general-purpose processor, ASIC, ARM, DSP, controller, or any other type processing device. The processor **208** and other elements of the mobile device **200** receive power from a battery **220** or other power source. An electrical interface **224** provides one or more electrical ports to electrically interface with the mobile device, such as with a second electronic device, computer, a medical device, or a power supply/charging device. The interface **224** may comprise any type electrical interface or connector format.

One or more memories **210** are part of the mobile device **200** for storage of machine readable code for execution on the processor **208** and for storage of data, such as image data, audio data, user data, medical data, location data, accelerometer data, or any other type of data. The memory **210** may comprise RAM, ROM, flash memory, optical memory, or micro-drive memory. The machine-readable code as described herein is non-transitory.

As part of this embodiment, the processor **208** connects to a user interface **216**. The user interface **216** may comprise any system or device configured to accept user input to control the mobile device. The user interface **216** may comprise one or more of the following: keyboard, roller ball, buttons, wheels, pointer key, touch pad, and touch screen. A touch screen controller **230** is also provided which interfaces through the bus **212** and connects to a display **228**.

The display comprises any type display screen configured to display visual information to the user. The screen may comprise a LED, LCD, thin film transistor screen, OEL CSTN (color super twisted nematic), TFT (thin film transistor), TFD (thin film diode), OLED (organic light-emitting diode), AMOLED display (active-matrix organic light-emitting diode), capacitive touch screen, resistive touch screen or any combination of these technologies. The display **228** receives signals from the processor **208** and these signals are translated by the display into text and images as is understood in the art. The display **228** may further comprise a display processor (not shown) or controller that interfaces with the processor **208**. The touch screen controller **230** may comprise a module configured to receive signals from a touch screen which is overlaid on the display **228**.

Also part of this exemplary mobile device is a speaker **234** and microphone **238**. The speaker **234** and microphone **238** may be controlled by the processor **208**. The microphone **238** is configured to receive and convert audio signals to electrical signals based on processor **208** control. Likewise, the processor **208** may activate the speaker **234** to generate audio signals. These devices operate as is understood in the art and as such are not described in detail herein.

Also connected to one or more of the buses **212** is a first wireless transceiver **240** and a second wireless transceiver **244**, each of which connect to respective antennas **248**, **252**. The first and second transceiver **240**, **244** are configured to receive incoming signals from a remote transmitter and perform analog front-end processing on the signals to generate analog baseband signals. The incoming signal maybe further processed by conversion to a digital format, such as by an analog to digital converter, for subsequent processing by the processor **208**. Likewise, the first and second transceiver **240**, **244** are configured to receive outgoing signals from the processor **208**, or another component of the mobile device **208**, and up convert these signal from baseband to RF frequency for transmission over the respective antenna **248**, **252**. Although shown with a first wireless transceiver **240** and a second wireless transceiver **244**, it is contemplated that the mobile device **200** may have only one such system or two or more transceivers. For example, some devices are tri-band or quad-band capable, or have Bluetooth®, NFC, or other communication capability.

It is contemplated that the mobile device, and hence the first wireless transceiver **240** and a second wireless transceiver **244** may be configured to operate according to any

presently existing or future developed wireless standard including, but not limited to, Bluetooth, WI-FI such as IEEE 802.11 a,b,g,n, wireless LAN, WMAN, broadband fixed access, WiMAX, any cellular technology including CDMA, GSM, EDGE, 3G, 4G, 5G, TDMA, AMPS, FRS, GMRS, citizen band radio, VHF, AM, FM, and wireless USB.

Also part of the mobile device is one or more systems connected to the second bus **212**B which also interface with the processor **208**. These devices include a global positioning system (GPS) module **260** with associated antenna **262**. The GPS module **260** can receive and processing signals from satellites or other transponders to generate location data regarding the location, direction of travel, and speed of the GPS module **260**. GPS is generally understood in the art and hence not described in detail herein. A gyroscope **264** connects to the bus **212**B to generate and provide orientation data regarding the orientation of the mobile device **204**. A magnetometer **268** is provided to provide directional information to the mobile device **204**. An accelerometer **272** connects to the bus **212**B to provide information or data regarding shocks or forces experienced by the mobile device. In one configuration, the accelerometer **272** and gyroscope **264** generate and provide data to the processor **208** to indicate a movement path and orientation of the mobile device.

One or more cameras (still, video, or both) **276** are provided to capture image data for storage in the memory **210** and/or for possible transmission over a wireless or wired link or for viewing later. The one or more cameras **276** may be configured to detect an image using visible light and/or near-infrared light. The cameras **276** may also be configured to utilize image intensification, active illumination, or thermal vision to obtain images in dark environments. The processor **208** may process image data to perform image recognition, such as in the case of, facial detection, item detection, facial recognition, item recognition, or bar/box code reading.

A flasher and/or flashlight **280**, such as an LED light, are provided and are processor controllable. The flasher or flashlight **280** may serve as a strobe or traditional flashlight. The flasher or flashlight **280** may also be configured to emit near-infrared light. A power management module **284** interfaces with or monitors the battery **220** to manage power consumption, control battery charging, and provide supply voltages to the various devices which may require different power requirements.

FIG. **3** illustrates exemplary software modules that are part of the mobile device and server. Other software modules may be provided to provide the functionality described below. It is provided that for the functionality described herein there is matching software (non-transitory machine-readable code, machine executable instructions or code) configured to execute the functionality. The software would be stored on a memory and executable by a processor.

In this example confirmation, the mobile device **304** includes a receive module **320** and a transmit module **322**. These software modules are configured to receive and transmit data to remote device, such as cameras, glasses, servers, cellular towers, or WIFI system, such as router or access points.

Also part of the mobile device **304** is a location detection module **324** configured to determine the location of the mobile device, such as with triangulation or GPS. An account setting module **326** is provided to establish, store, and allow a user to adjust account settings. A log in module **328** is also provided to allow a user to log in, such as with password protection, to the mobile device **304**. A facial detection module **308** is provided to execute facial detection algorithms while a facial recognition module **321** includes software code that recognizes the face or facial features of a user, such as to create numeric values which represent one or more facial features (facial biometric information) that are unique to the user.

An information display module **314** controls the display of information to the user of the mobile device. The display may occur on the screen of the mobile device or watch. A user input/output module **316** is configured to accept data from and display data to the user. A local interface **318** is configured to interface with other local devices, such as using Bluetooth® or other shorter-range communication, or wired links using connectors to connected cameras, batteries, data storage elements. All the software (with associated hardware) shown in the mobile device **304** operate to provide the functionality described herein.

Also shown in FIG. **3** is the server software module **350**. These modules are located remotely from the mobile device, but can be located on any server or remote processing element. As is understood in the art, networks and network data use a distributed processing approach with multiple servers and databases operating together to provide a unified server. As a result, it is contemplated that the module shown in the server block **350** may not all be located at the same server or at the same physical location.

As shown in FIG. **3**, the server **350** includes a receive module **352** and a transmit module **354**. These software modules are configured to receive and transmit data to remote devices, such as cameras, watches, glasses, servers, cellular towers, or WIFI systems, such as router or access points.

An information display module **356** controls a display of information at the server **350**. A user input/output module **358** controls a user interface in connection with the local interface module **360**. Also located on the server side of the system is a facial recognition module **366** that is configured to process the image data from the mobile device. The facial recognition module **366** may process the image data to generate facial data (biometric information) and perform a compare function in relation to other facial data to determine a facial match as part of an identify determination.

A database interface **368** enables communication with one or more databases that contain information used by the server modules. A location detection module **370** may utilize the location data from the mobile device **304** for processing and to increase accuracy. Likewise, an account settings module **372** controls user accounts and may interface with the account settings module **326** of the mobile device **304**. A secondary server interface **374** is provided to interface and communicate with one or more other servers.

One or more databases or database interfaces are provided to facilitate communication with and searching of databases. In this example embodiment the system includes an image database that contains images or image data for one or more people. This database interface **362** may be used to access image data users as part of the identity match process. Also part of this embodiment is a personal data database interface **376** and privacy settings data module **364**. These two modules **376**, **364** operate to establish privacy setting for individuals and to access a database that may contain privacy settings.

Authentication System

An authentication system with path parameters that is operable in the above described environment and system will now be described as shown in FIG. **4**. FIG. **4** shows a method for performing facial recognition authentication

with path parameters according to one embodiment of the invention. As will be described in more detail below, the system utilizes the features of the mobile device **112** and server **120** defined above to generate a secure and convenient login system as one example of an authentication system. This reduces the burden of the user having to type in complex passwords onto a small screen of a mobile device, prevents fraud through means such as key logging or screen shot captures, and increases security by combining several path parameters and/or device parameters which must be met before user is authenticated.

In step **410**, the system enrolls a user in the facial recognition authentication system. In one embodiment, an authentication server, such as the server **120** (FIG. **1**), may be configured to authenticate a user to allow access to a user's account, such as a bank or other account, via the mobile device **112**. The authentication server **120** may be included as a part of a server of the institution or entity providing user accounts (hereinafter "account server"), or the authentication server may be provided separately. For example, in the environment shown in FIG. **1**, Servers **120**B and **120**C may represent account servers. In other embodiments, the account server and the authentication server are one in the same. In one embodiment, the authentication server **120** may provide an authentication application to the user for installation on the mobile device **112**.

An enrollment process according to one embodiment will be described with reference to FIG. **5**. In this embodiment, a user via a mobile device **112** establishes a connection between the mobile device **112** and the account server **120**B in step **510**. As just one example, the user may establish a connection with a server of a financial institution such as a bank, or this connection may occur later in the process after authentication. The user then provides typical login information to authenticate the user, such as a user name and password for a financial account in step **512**. In step **514**, the user may next receive a prompt at the mobile device **112** to enroll in the facial recognition authentication system. The user then, via the user interface, indicates that he or she would like to set up the authentication system in response to the prompt.

Next, in step **516**, the mobile device **112** may send device information to the authentication server **120**. The device information may include among other information a device identifier that uniquely identifies the mobile device of the user. Such information may include device manufacturer, model number, serial number, and mobile network information. In step **518**, when the authentication server **120** is incorporated with the account server **120**B, the authentication server **120** associates and stores the device information with the user's account information. When the authentication server **120** is separate from the account server **120**B, the account server **120**B may generate a unique identifier related to the account information and send the unique identifier to the authentication server **120**. The authentication server **120** may associate the device information and the unique identifier with each other and may store the information in a database **124**.

The user is next prompted to provide a plurality of images of his or her face using a camera **114** on the mobile device **112** (hereinafter, "enrollment images") in step **510**. The enrollment images of the user's face are taken as the user holds the mobile device and moves the mobile device to different positions relative to his or her head and face. Thus, the enrollment images of the user's face are taken from many different angles or positions. Furthermore, the path parameters of the mobile device are monitored and recorded for future comparison in step **522**. Some non-limiting examples of how a user might hold a mobile device and take a plurality of images of her face is shown in FIGS. **6**A-**7**B.

In FIGS. **6**A and **6**B, the user holds the mobile device **112** on one side of his or her face, and moves the mobile device **112** in an arc like path horizontally about his or her face until the mobile device **112** is on the other side of her or her face. In FIGS. **7**A and **7**B, the user holds the mobile device **112** far away from his or her face, and then brings the mobile device **112** forward closer to his or her face. Of course, any number of other paths may be used in addition to those shown in FIGS. **6**A-**7**B. Additionally, the user may move his or her head while the camera is held fixed. The user could also hold the camera steady and move their head in relation to the camera. This method thus can be implemented with a webcam on a laptop or desktop, or on any other device, such as an IoT device where a camera is mounted on a similarly stationary location or object.

The enrollment images may be obtained as follows. The user holds and orients a mobile device **112** with a camera **114** so that the camera **114** is positioned to image the user's face. For example, the user may use a front facing camera **114** on a mobile device **112** with a display screen and may confirm on the display screen that his or her face is in position to be imaged by the camera **114**.

Once the user has oriented the device, the device may begin obtaining the enrollment images of the user. In one embodiment, the user may press a button on the device **112** such as on a touchscreen or other button on the device to initiate the obtaining of the enrollment images. The user then moves the mobile device to different positions relative to his or her head as the device images the user's face from a plurality of angles or positions as described above. When the above-mentioned front-facing camera is used, the user may continually confirm that his or her face is being imaged by viewing the imaging on the display screen. The user may again press the button to indicate that the imaging is completed. Alternatively, the user may hold the button during imaging, and then release the button to indicate that imaging is complete.

As described above, the mobile device **112** may include face detection. In this embodiment in step **524**, the mobile device may detect the user's face in each of the enrollment images, crop the images to include only the user's face, and send, via a network, the images to the authentication server **120**. In step **526**, upon receipt of the enrollment images, the authentication server **120** performs facial recognition on the images to determine biometric information ("enrollment biometrics") for the user. The authentication server **120** may then associate the enrollment biometrics with the device information and the unique identifier (or account information) and stores the biometric information in the database **124** in step **528**. For added security, in step **530**, the mobile device **112** and the authentication server **120** may be configured to delete the enrollment images after the enrollment biometrics of the user are obtained.

In another embodiment, the mobile device **112** may send the images to the authentication server **120** without performing face detection. The authentication server **120** may then perform the face detection, facial recognition, and biometric information processing. In another embodiment, the mobile device **112** may be configured to perform the facial detection, facial recognition, and biometric processing, and then send the results or data resulting from the processing to the authentication server **120** to be associated with the unique identifier or user account. This prevents sensitive personal data (images) from leaving the user's device. In yet another

embodiment, the mobile device **112** may perform each of the above-mentioned steps, and the mobile device **112** may store the enrollment information without sending any of the enrollment biometrics or images to the server.

In one embodiment, the mobile device's gyroscope, magnetometer, and accelerometer are configured to generate and store data while the user moves the mobile device about his or her head to obtain the enrollment images (path parameters). The mobile device may process this data in step **532** to determine a path or arc in which the mobile device moved while the user imaged his or her face ("enrollment movement"). By using data from the accelerometer, magnetometer, and gyroscope, the system may check when a user is ready to begin scanning himself/herself, as well as determining the scan path. The data is thus used to determine when to start and stop the scan interval. The data may additionally include the time elapsed during scanning. This time may be measured from the user pressing the button to start and stop the imaging, or may be measured from the duration the button is held down while imaging, or during more movement or to complete sweep.

The enrollment movement of the mobile device **112** (which is data that defined the movement of the mobile device during image capture) may be sent to the authentication server **120**. The authentication server **120** associates and stores the enrollment movement, the enrollment biometrics, the device information, and the unique identifier or account information. Alternatively, the data generated by the gyroscope, magnetometer, and accelerometer may be sent to the server **120**, and the server **120** may process the data to determine the enrollment movement.

Thus, in the above described embodiment, the enrollment information may thus comprise the device information, the enrollment biometrics, and the enrollment movement (based on movement of the mobile device **112**).

Returning to FIG. **4**, once enrollment is complete, the authentication server **120** may later receive credentials from a user attempting to authenticate with the system as shown in step **420**. For example, a user may attempt to log in to a user account. When a user attempts to log in, instead of or in addition to providing typical account credentials such as user name and password, the user may again take a plurality of images or video of his or her face as the mobile device **112** is held in the hand and moved to different positions relative to the head ("authentication images") in the same manner as was done during enrollment (such as shown in FIGS. **6**A-**7**B). In this manner, the user may provide the necessary images (the term images includes video as video is a succession of images) from many different angles and/or positions, and may provide path parameters of the device while obtaining the images ("authentication movement") to both confirm the identity of the user as well as the liveness and realness of that individual to ensure it is not a video, screen shot, or other representation of the person.

In one embodiment outlined in FIG. **8**, the user via the mobile device **112** obtains several authentication images in step **810** while moving the mobile device **112** to different positions relative to the user's head. Using facial detection in step **812**, the mobile device **112** detects the user's face in each of the authentication images, crops the images, and sends the images to the authentication server **120**. In another embodiment, the mobile device **112** sends the images to the server **124**, and the server **124** performs facial detection. In step **814**, the authentication routing **120** may perform facial recognition on the authentication images to obtain biometric information ("authentication biometrics"). In another embodiment, the mobile device **112** performs facial recognition to obtain the authentication biometrics and sends the authentication biometrics to the server **120**.

In step **816**, the mobile device **112** sends the device information identifying the device and sends path parameters such as gyroscope, magnetometer, and accelerometer information defining the path of the mobile device taken during imaging, as well as the elapsed time during imaging ("authentication movement") to the server **120**. The credentials received by the authentication server **120** for a login in the facial recognition system may thus comprise the device information, the authentication images or the authentication biometrics, and the authentication movement (path parameters).

Returning to FIG. **4**, in step **430**, the authentication server **120** verifies that the credentials received from the mobile device **112** sufficiently correspond with the information obtained during enrollment. For example, as shown in step **910** in FIG. **9**, by using algorithms to process the characteristics of the face and light striking the face between the different images, the authentication server **120** can determine that the face in the authentication images is three-dimensional, i.e. not a representation on a printed picture or video screen. Where the mobile device **120** sends only the authentication biometrics **120** to the server, the server **120** may validate the realness or three-dimensional aspects of the user imaged by comparing the biometric results of the different images.

In step **920**, the authentication server **120** may then compare the login credentials with the information stored from the enrollment process. In step **920**, the server **120** compares the identification of the device obtained during the login process to that stored during enrollment. In step **930**, the authentication biometrics may be compared with the enrollment biometrics to determine whether they sufficiently correspond with the enrollment biometrics. In step **940**, the authentication movement may be compared with the enrollment movement to determine whether it sufficiently corresponds with the enrollment movement.

In some embodiments, a copy of the enrollment information may be stored on the mobile device **112**, and the mobile device **112** may verify that the credentials received on the mobile device **112** sufficiently correspond with the enrollment information. This would allow a user to secure documents, files, or applications on the mobile device **112** itself in addition to securing a user's account hosted on a remote device, such as the authentication server **120**, even when a connection to the authentication server **120** may be temporarily unavailable, such as when a user does not have access to the Internet. Further, this would allow the user to secure access to the mobile device **112** itself. Or enrollment info may be stored on server.

Accordingly, in step **950**, if the authentication server **120** or mobile device **112** determines that the enrollment information sufficiently corresponds with the credentials received, then the server or mobile device may verify that the identification of the user attempting login corresponds the account holder. This avoids the cumbersome process of the user having to manually type in a complex password using the small screen of the mobile device. Many passwords now require capital, non-text letter, lower case, and numbers.

The level of correspondence required to determine that the enrollment information sufficiently corresponds with the authentication information in the login attempt may be set in advance. For example, the level of correspondence may be a 99.9% match rate between the enrollment biometrics and the authentication biometrics and a 90% match rate between

the enrollment movement and the authentication movement. The required level of correspondence may be static or elastic based on the established thresholds.

For example, the required level of correspondence may be based on GPS information from the mobile device **112**. In one embodiment, the authentication server **120** may require a 99.9% match rate as the level of correspondence when the GPS information of the mobile device corresponds with the location of the user's home or other authorized location(s). In contrast, if the GPS information shows the device is in a foreign country far from the user's home, the authentication server may require a 99.99% match rate as the level of correspondence or may be denied entirely. Hence, the required match between pre-stored authentication data (enrollment information) and presently received authentication data (authentication information) is elastic in that the required percentage match between path parameters or images my change depending on various factors, such as time of day, location, frequency of login attempt, date, or any other factor.

The required level of correspondence may additionally depend on time. For instance, if a second authentication attempt is made shortly after a first authentication attempt in a location far from the first authentication location based on GPS information from the mobile device **112**, the level of correspondence threshold may be set higher. For example, a user can not travel from Seattle to New York in 1 hour. Likewise, login attempts at midnight to three in the morning may be a sign of fraud for some users based on patterns of the users' usage.

The level of correspondence between the enrollment information and the authentication information may be the result of compounding the various parameters of the enrollment information and the authentication information. For example, when the button hold time in the authentication information is within 5% of the button hold time of the enrollment information, the correspondence of the button hold time may constitute 20% of the overall match. Similarly, when the motion path trajectory of the authentication information is within 10% of the enrollment information, the motion path trajectory may constitute 20% of the overall match. Further parameter match rates such as the face size and facial recognition match in the authentication information as compared to the enrollment information may constitute the remaining 10% and 50% of the overall level of correspondence. In this manner, the total overall level of correspondence may be adjusted (total of all parameters being more than 75%, for example), or the match rate of individual parameters may be adjusted. For example, on a second attempted login, the threshold match rate of one parameter may be increased, or the overall level of correspondence for all parameters may be increased. The threshold match rates may also be adjusted based on the account being authenticated or other different desired levels of security.

Returning to FIG. **4**, in step **440**, the authentication server **120** may grant or deny access based on the verification in step **430**. For example, if the authentication server **120** verifies that the credentials match the enrollment information, then the server **120** may authenticate the user to allow access to the user's account. In the instance where the authentication server **120** is separate from the account server **120**B (such as a bank's server), the authentication server **120** may transmit the unique identifier to the account server along with an indication that the identity of the user associated with the unique identifier has been verified. The account server **120**B may then authorize the user's mobile device **112** to transmit and receive data from the account server **120**B. Of course, all this may occur at only the account server **120**B or on the mobile device **112** itself.

Alternatively, if the credentials provided by the user are not verified, the authentication server may transmit a message to display on the screen of the mobile device **112** indicating that the login attempt failed. The authentication server **120** may then allow the user to try again to log in via the facial recognition login system, or the authentication server **120** may require the user to enter typical account credentials, such as a user name and password.

In one embodiment, the server **120** may allow three consecutive failed login attempts before requiring a user name and password. If in one of the attempts, the required level of correspondence is met, then the user may be verified, and access may be granted. According to one embodiment, the authentication server **120** may retain the information from each successive authentication attempt and combine the data from the multiple authentication attempts to achieve more accurate facial biometric information of the person attempting to authenticate. In addition, the level of correspondence may be increased at each successive attempt to authenticate. In addition, by averaging the path data (authentication movement) and/or image data (authentication images/biometrics) from several login attempts, the login data (enrollment information) is perfected and improved.

Accordingly, the above described authentication system allows for authentication to a remote server **120** or on the mobile device **112** itself. This may be accomplished as described above by the mobile device **112** capturing the authentication credentials, and the authentication server **120** processing and analyzing the credentials compared to the enrollment information (cloud processing and analysis); the mobile device **112** capturing the authentication credentials and processing the credentials, and the authentication server **120** analyzing the credentials compared to the enrollment information (mobile device processing, cloud analysis); or the mobile device **112** capturing the authentication credentials, and processing and analyzing the credentials compared to the enrollment information (mobile device processing and analysis).

Advantages and Features of the Embodiments

The above described system provides several advantages. As one advantage, the facial recognition authentication system provides a secure login. For example, if during a login attempt the camera of the mobile device imaged a digital screen displaying a person rotating their head while the phone was not moving, the accelerometer, magnetometer, and gyroscope data would not detect any motion. Thus, the enrollment movement and the authentication movement would not correspond, and the login attempt would be denied.

In addition, because a plurality of images are used as enrollment images and authentication images, histograms or other photo manipulation techniques may be used to determine if a digital screen is present in place of a human face in the images. For example, the system may check for light frequency changes in the captured images, or banding in an image which would indicate an electronic display generated the image, backlighting, suspicious changes in lighting, or conduct other analyses on the images by comparing the images to determine that the actual live user is indeed alive, present, and requesting authorization to login.

As yet another advantage, as explained above, not only must the enrollment biometrics sufficiently correspond to the authentication biometrics, but also the enrollment movement must match the authentication movement, and the device information must match the enrollment device information. For example, an application may be downloaded to a mobile device that has a digital camera. The application may be a login application, or may be an application from a financial institution or other entity with which the user has an account. The user may then login to the application using typical login credential such as a website user name and password. Further, the user may have a device code from logging in on another device, or may use the camera to scan QR code or other such code to pair the device to their user account.

The user then holds the mobile device to move the mobile phone to different positions relative to his or her head while keeping his or her face visible to the camera as it is moved. As the mobile device is moved, the camera takes the enrollment images of the face. During imaging, the speed and angle of the current user's mobile device movement is measured using the accelerometer, magnetometer, and gyroscope to generate the enrollment movement. Further continuous imaging and detection of the face throughout the process has been shown to prevent fraud. This is because a fraud attempt cannot be made by rotating images in and out of the front of the camera.

For example, a user may start the movement from right to left or from left to right as shown in FIGS. **6**A and **6**B. The movement may also be in a front and back direction as shown in FIGS. **7**A and **7**B. Any other movement may be utilized such as starting in the center, then going right, and then going back to center. Vertical and diagonal movements may also be used to further compound the complexity of the enrollment movement. When the user then later attempts login, the user must repeat the motion pattern in the authentication movement to match the enrollment movement in addition to the biometric data and device information matching. Thus, the security of the system is greatly enhanced.

The system therefore provides enhanced security for authenticating a user who has a mobile device. As explained above, the system may use at least any one or more of the following in any number of combinations to securely authenticate the user: physical device verification, mobile network verification, facial recognition including the size of the face in the image, a face detected in every frame during the movement, accelerometer information, gyroscope information, magnetometer information, pixels per square inch, color bits per pixel, type of image, user entered code or pattern, and GPS information.

As another advantage, the facial recognition login system provides a convenient manner for a user to login to an account with a mobile device. For example, once enrolled, a user does not need to enter a user name and password on the small mobile device each time the user wishes to access the account. Instead, the user simply needs to image himself or herself while mimicking the enrollment movement with the mobile device. This is especially advantageous with smaller mobile devices such as mobile phones, smart watches, and the like.

The system may be further configured to allow a user to securely log on to multiple devices, or to allow users to securely share devices. In one embodiment, the enrollment information may be stored on an authentication server (or on "the cloud") and thus is not associated only with the user's original device. This allows the user to use any number of suitable devices to authenticate with the authentication server. In this manner, a user may use a friend's phone (third party device) or other device to access his or her information, such as account information, address book information, email or other messaging, etc. by performing the authentication operation on any device.

For example, the user may provide an email address, user name code, or similar identifier on the friend's phone such that the authentication server compares the login information with enrollment information for the user's account. This would indicate to the authentication server which authentication profile to use, but does not by itself allow access to the user's data, accounts, or tasks. Upon logging out of a friend's phone, access to the user's information on the friend's phone is terminated. The provides the benefit of allowing a user to securely access account or other authentication accessible information or tasks using any device without having to type the user's password into the third-party device, where it could be logged or copied. In a sense, the user is the password.

Through cloud-based enrollment information, a single user may also securely transfer data between authenticated devices. In one embodiment, a user may own a first device, such as a mobile phone, and is authenticated on the first device via the authentication system. The user may then acquire a new device, such as a new phone, tablet computer, or other device. Using the cloud-based authentication system, the user may authenticate on the new device and transfer data from the first device to the new device. The transfer of data may be completed via the Internet, a local network connection, a Bluetooth connection, a wired connection, or a near field communication. The authentication process may also be part of a security check to resent or restore a system after the phone is lost or stolen. Thus, the authentication system may be used to activate or authenticate a new device, with the authentication used to verify the user of the new device.

Similarly, the system may facilitate secure access to a single shared device by multiple people to control content or other features on the device. In many cases, passwords can be viewed, copied, guessed, or otherwise detected, particularly when a device is shared by several users. The users may be, for example, family members including parents and children, coworkers, or other relationships, such as students. The authentication system may allow each of the family members to log in based on his or her own unique enrollment information associated with a user account.

The device may restrict access to certain content or features for one or more of the certain user's accounts, such as children's user accounts, while allowing access to content and features for others, such as the parents' accounts. By using the authentication system for the shared device, the users such as children are unable to utilize a password to try and gain access to the restricted content because the authentication system requires the presence of the parent for authentication, as explained above. Thus, device sharing among users with different privileges is further secured and enhanced. Likewise, in a classroom setting, a single device may be securely shared between multiple people for testing, research, and grade reporting.

Adaptations and Modifications

Numerous modifications may be made to the above system and method without departing from the scope of the invention. For example, the images may be processed by a facial recognition algorithm on the device and may also be converted to biometric data on the device which is then compared to previously created biometric data for an authorized user. Alternatively, the images from a device may be sent through a wired or wireless network where the facial

recognition algorithms running on a separate server can process the images, create biometric data and compare that data against previously stored data that assigned to that device.

Multiple Profiles for a Single User

Further, the photo enrollment process may be done multiple times for a user to create multiple user profiles. For example, the user may enroll with profiles with and without glasses on, with and without other wearable devices, in different lighting conditions, wearing hats, with different hair styles, with or without facial or ear jewelry, or making different and unique faces, such as eyes closed, winking or tongue out to establish another level of uniqueness to each user profile. Such 'faces' made by the user would not be available on the user's Social Media Pages and hence not available for copying, manipulation, and use during a fraud attempt. Each set of enrollment images, enrollment biometrics, or both may be saved along with separate enrollment movement. In one embodiment at least three images are captured as the mobile device completes the path. It is contemplated that any number of images may be captured.

Linking Enrollment Information

It is also contemplated that the enrollment process may be linked to an email address, phone number, or other identifier. For example, a user may sign up with an email address, complete one or more enrollments as described above, and confirm the enrollments via the same email address. The email address may then further enhance the security of the system. For example, if a user unsuccessfully attempts to login via the authentication system a predetermined number of times, such as three times for example, then the authentication system locks the account and sends an email to the email address informing the user of the unsuccessful login attempts. The email might also include one or more pictures of the person who failed to login and GPS or other data from the login attempt. The user may then confirm whether this was a valid login attempt and reset the system, or the user may report the login attempt as fraudulent. If there is a reported fraudulent login, or if there are too many lockouts, the system may delete the account associated with the email address to protect the user's security. Thus, future fraudulent attempts could not be possible.

Feedback Meters

To further facilitate imaging, the mobile device may include various feedback meters such as a movement meter or accuracy meter as shown in FIG. **10**. In one embodiment, the mobile device **1012** may display a movement meter **1024** that indicates the amount of movement the mobile device **1012** makes as the user moves the mobile device **1012** to different positions relative to his/her head. For example, the movement meter **1024** may be represented as a line that slides from one side of the screen. In this manner, the enrollment process may require a certain threshold of device movement to register a user with the multi-dimensional authentication system. For example, the system could require that the mobile device **1012** is moved in an arc or straight line and is rotated at least 45 degrees to create the enrollment information. In another example, the system could require an acceleration experienced by the device exceeding a threshold amount. The movement meter may also aid the user in learning how to image himself/herself using the authentication system.

The mobile device **1012** may also display an accuracy meter **1026** or any other visual representation of authenticated frames to aid the user in authenticating himself/herself using the authentication system and learning to improve authentication. The accuracy meter **1026** may show a user a match rate (graphical, alpha, or numerical) of a predetermined number of images obtained during the authentication process. The accuracy meter can be represented on the display in a variety of ways including numeric percentages, color representation, graphical, and the like. A combination of representations may also be utilized.

For example, as shown in FIG. **10**, match rates for a predetermined number of images taken during authentication are represented on the accuracy meter. In the embodiment shown in FIG. **10**, each of the images may be represented by a column in a graph, and the accuracy can be shown for each image in each column. For example, the column with a longer bar represent higher accuracy, and a column with a lower bar represents lower accuracy. In addition to match rates for images, the match rates for the path parameter may also be displayed. Over time the user can improve.

In another embodiment, each of the images may be represented on a table as a color that corresponds to the match rate. The color dark green may represent a very high match rate, light green may represent a good match rate, yellow may represent a satisfactory match rate, red may represent a mediocre match rate, and grey may represent a poor match rate. Other colors schemes may also be used.

The height of the bars or the colors used may correspond to predetermined match rates. For example, a full bar or dark green may be a match rate greater than 99.9%, a three-quarter bar or light green may be a match rate between 90% and 99.9%, a half bar or yellow may be a match rate of 50-90%, red may be a match rate of 20%-50%, and a single line to a quarter bar or grey may be a match rate of 0-20%. A pie chart, line graph, or any other type of representation could also be used or any other numerical or graphical display. An overall score may be presented or a score per image.

The accuracy meter may also include a message **1028** indicating an overall match score. For example, the accuracy meter may indicate an average overall match score or the number of images which achieved a 99.9% match rate, and display the message to a user. With the movement meter **1024** and the accuracy meter **1026** as described above, the user may quickly learn to use the authentication system due to the feedback presented by the meters **1024**, **1026**.

Gamification and Rewards

The movement and accuracy meters **1024**, **1026** may also be configured to incorporates game features, aspects, or techniques into the authentication system to encourage a user to try and get the best match possible (such as a high number score or a high percentage of frames), increasing the user's skill in utilizing the authentication system. This also builds user adoption rates for the technology.

For example, the user may compete with themselves to mimic or improve past authentication scores to encourage or train the user to achieve a high score. Further modifications of the authentication meter may also be incorporated such as the ability to share accuracy match results with others to demonstrate one's skill in using the system or to compete against others. In other instances, the user may receive a reward, such as a gift or coupon, for high accuracy scores. While this may slightly increase costs, the reduction in fraud loss would far outweigh the additional cost.

Further game techniques may be incorporated into the authentication system to encourage users to take actions which will prevent unauthorized or fraudulent authentication. In one embodiment, the authentication system may award users that engage in fraud preventing activities. One such activity is utilizing the facial recognition authentication

system described herein. For example, based on the above described accuracy meter, the system may reward a user that successfully authenticates with the system above a certain match rate. The system may award reward points, cash, or other prizes based on the successful authentication or on a predetermined number of successful authentications. Where reward points are utilized, the points may be cashed in for predetermined prizes.

Other game features may involve award levels for users who gain a predetermined amount of experience using the authentication feature. For example, different reward levels may be based on users successfully authenticating 100 times, 500 times, 1000 times, etc. Because each instance of fraud loss can be significant and can damage the goodwill of the business or organization, the benefits to fraud prevention are significant.

In one embodiment, the user may be notified that he or she has achieved various competency levels, such as a "silver level" upon achieving **100** successful authentications, a "gold level" for achieving **500** successful authentications, or a "platinum level" for achieving **1000** successful authentications. An amount of points awarded for each authentication above a given match rate may increase based on the user's experience level. Of course, the names of the levels and the number of authentications for each level as described above are only exemplary and may vary as desired.

In one embodiment, an authentication only counts toward reward levels when business is transacted at the web site while in other embodiments, repeated attempts may be made, all of which count toward rewards. Another feature may incorporate a leaderboard where a user may be notified of a user ranking comparing his or her proficiency or willingness in using the authentication system as compared with other users.

Successful use of the authentication system benefits companies and organizations that utilize the system by reducing costs for fraudulent activities and the costs of preventing fraudulent activities. Those cost savings may be utilized to fund the above described game features of the authentication system.

Further activities that correspond to the authentication system and contribute to the reduction of fraud may also be incorporated to allow a user to earn points or receive prizes. Such activities may include a user creating a sufficiently long and strong password that uses a certain number and combination of characters. This encourages and rewards users to set passwords that are not easily compromised. Other examples may include rewarding users to take time to perform verification steps in addition to an initial authentication such as a mobile phone or email verification of the authentication, answering one or more personal questions, or other secondary verifications as currently known or later developed. This rewards users for taking on added time and inconvenience to lower the risk of fraud to a company or organization.

As another example, if the authentication service is used to login to websites or apps that provide affiliate programs, then the reward or gift can be subsidized from the affiliate commissions on purchases made on those sites. For example, if a commerce (product or service) web site utilizes the method and apparatus disclosed herein to avoid fraud, and thus increase profits, then a percentage of each purchase made by a user using the authentication service will be provided to the authentication service. By reducing fraud, consumer purchases are more likely and additional users will be willing to enter financial and personal information. An affiliate link, code, or referral source or identifier may be used to credit the authentication system with directing the consumer to the commerce (product or service) web site.

Multiple Account Login

It is also contemplated that the authentication system may be configured to allow a user to access several different web sites using a single authentication. Because the authentication process and result are unique to the user, the user may first designate which participating web sites the user elects to log into and then after selecting which one or more web sites to log into, the user performs the authentication described herein. If the secure authentication is successful, then the user is logged into the selected web sites. In this way, the authentication process is a universal access control for multiple different web sites and prevents the user from having to remember multiple different user names and passwords while also reducing fraud and password overhead for each user.

Automatic Start/Stop of Imaging

It is also contemplated that the system may be configured to have the video camera running on the phone. The mobile device would grab frames and path parameter data when the phone moves (using the camera, gyroscope, magnetometer, and accelerometer) but only process into biometric data on the device or send the frames up to the server if they have a face in them. In this embodiment, the application executing on the mobile device could trigger the software application to start saving frames once the phone is moving and then if the phone continues to move in the correct path (a semi-circle, for example) and the system detects a face in the frame the mobile device would start to send images, a portion of the image, orbiometric data to the server for processing. When the system senses motion it may trigger the capture of images at certain intervals. The application may then process the frames to determine if the images contain a face. If the images do include a face, then the application crops it out and then verifies if the motion path of the mobile device is similar to the one use used during enrollment. If the motion path is sufficiently similar, then the application can send the frames one at a time to the server to be scanned or processed as described above.

Banding and Edge Detection

When a fraudulent attempt is made using a display screen, such as an LED, LCD, or other screen, the system may detect the fraudulent login attempt based on expected attributes of the screen. In one embodiment, the authentication system will run checks for banding produced by digital screens. When banding is detected, the system may recognize a fraudulent attempt at a login. In another embodiment, the system will run checks for edge detection of digital screens. As the mobile device is moved to obtain the authentication movement during a login attempt, the system checks the captured images to for edges of a screen to recognize a fraudulent login attempt. The system may also check for other image artifacts resulting from a screen such as glare detection. Any now know or later developed algorithms for banding and screen edge detection may be utilized. Upon detection of fraud will prevent authentication and access to the website or prevent the transaction or account access.

Other Attributes Estimation

The authentication system may further conduct an analysis on the enrollment images to estimate at least one of a gender, an approximate age, and an ethnicity. In an alternative embodiment, the user may manually enter one or more of their gender, an approximate age, and an ethnicity, or this information may be taken or obtained from existing records

which are known to be accurate. The authentication system may then further store a user's estimated gender, age, and ethnicity as enrollment credentials or user data. Thus, when the user later attempts to authenticate with the system, the system will compare derived gender, age, and ethnicity obtained from authentication images (using biometric analysis to determine such data or estimates thereof based on processing) with the stored gender, age, and ethnicity to determine whether to authenticate the user. For example, if the derived data for gender, age and ethnicity matches the stored enrollment credentials, then the authentication is successful, or this aspect of the authentication is successful.

The authentication system may make the gender, age, and ethnicity estimations based on a single image during the authentication process or based on multiple images. For example, the authentication system may use an image from the plurality of images that has an optimal viewing angle of the user's face for the analysis. In other embodiments, a different image may be used for each analysis of age, gender, and ethnicity when different images reveal the best data for the analysis. The authentication may also estimate the gender, age, and ethnicity in a plurality of the images and average the results to obtain overall scores for a gender, age, and ethnicity.

As an alternative to obtaining the gender, age, and ethnicity as enrollment information, the estimated gender, age, and ethnicity estimations as authentication credentials may be set over a course of repeated use of the authentication system. For example, if in previous successful authentications using biometrics and movement information, the authentication system always estimates a user's age being between 40 and 50, then the authentication may set credentials for that user requiring later login information to include images of a face estimated to be between 40 and 50. Alternatively, gender, age, and ethnicity estimations may be implemented as one of many factors contributing to an overall authentication score to determine whether or not to authenticate a user.

For example, if the authentication process has a gender estimation of + or −0.2 of 1.9 male rating, then if the actual results do not fall within that range the system may deny access for the user. Likewise, if the user's age range always falls between 40-50 years of age during prior authentication attempts or enrollment, and an authentication attempt falls outside that range, the system may deny access or use the result as a compounding factor to deny access.

In a further embodiment, when a bracelet or watch capable of obtaining an EKG signature is used, a certain EKG signature may be required at login. The EKG signature could also be paired with the facial recognition rotation to provide multiple stage sign-on for critical security and identification applications. Further, the credentials could also include GPS information where login is only allowed within certain geographic locations as defined during enrollment. In one configuration the GPS coordinates of the mobile device are recorded and logged for a login attempt or actual login. This is additional information regarding the location of the user. For example, if the GPS coordinates are in a foreign country known for fraud, then the attempt was likely fraudulent, but if the GPS coordinate indicate the attempt or login was made in the user's house, then fraud is less likely. In addition, some applications may only allow a user to login when at specified location such as a secure government facility or at a hospital.

The enrollment information may further include distance information. Because the motion arc (speed, angle, duration . . .) is unique to each user, face detection software on the device can process the images and determine if the device is too close or too far from the subject. Or in other words, the enrollment information may consider the size of the face in the images. Thus, the potential enrollment information may also vary based on the length of a user's arm, head, and face size, and on the optics of the camera in the user's particular mobile device. The user may also be positioned at a fixed computer or camera, such as laptop, desktop, or atm. The user may then move the face either forwards and back, side to side, or up and down (or a combination) to create the images. Hence, this method of operation is not limited to a mobile device. In one embodiment, the camera is disposed in an automobile, such as in a mirror, and the person moves their head or face to authenticate.

Gradual Authentication Access

In one embodiment, the system is set to limit what the user can do when first enrolled and authenticated. Then, after further authentications or after a predetermined time period and number of authentications, additional capabilities may be granted. For example, during the first 20 authentications during the first 3 months, a maximum transaction of $100 may be allowed. This builds a database of known authentication data relating to non-objected to transactions by the user. Then, during the next 20 authentications a transaction limit of $3000 may be established. This limits the total loss in the event of fraud when the authentication data is limited, and the user is new to the system. For example, if an unauthorized user manages to fraudulently enroll in the authentication system.

Video Display for Imaging

When the user images himself/herself using a front-facing camera, the user may confirm that his/her face is being imaged by viewing the image on the display, as described above. The image shown on the display may be configured to be smaller in area than the entire display, and may be positioned in an upper portion of the display towards the top of the device. When the user's image is shown only in the top portion of the user's display screen, the user's eyes tend to look more closely at the front camera. When the user's eyes are tracking up, the accuracy of the facial recognition may be improved. Further, tracking the movement of the eyes from frame to frame may allow the system to validate that the images are of a live person, and are not from a photograph or video recording of the person.

The image shown on the display may also be positioned to correspond with a camera location on the user's device, as shown in FIGS. **11**A-**11**C. Mobile devices that are available today may include front-facing cameras disposed at several different positions. For example, one mobile device **1112***a*, **1112***b* may have a front-facing camera **1114***a*, **1114***b* that is disposed above the display and off center towards one side or the other, as shown in FIGS. **11**A and **11**B. Accordingly, the feedback image **1116***a*, **1116***b* of the user shown on the display may be positioned to correspond with the location of the camera **1114***a*, **1114***b* as shown. In FIG. **11**A, where a camera **1114***a* is above the display and is off-center at a position left of the center, then the image **1116***a* may be shown in an upper left corner of the display. In FIG. **11**B, where a camera **1114***b* is above the display and is off-center at a position right of the center, then the image **1116***b* may be shown in an upper right corner of the display. As shown in FIG. **11**C, a mobile device **1112***c* may have a camera **1114***c* that is disposed centered directly above the display. There, the image **1116***c* may be displayed centered in an upper portion of the display. In this manner, a user's eyes are directed close to and/or track as close to the camera as possible, aiding eye tracking and movement verification.

The user is also able to better see the feedback image, and other feedback or information on the screen, as they move the mobile device.

The image viewed on the display by the user may further be modified such that the edge pixels on the sides display are stretched horizontally as shown in FIG. **12**. That is, a predetermined area **1206**, **1208** on both the right and the left sides are warped to stretch towards right and left edges, respectively, of the screen. This allows a larger vertical portion of the displayed image to be shown on the display. Simultaneously, this trains a user to use the system correctly by keeping his or her face in the center of the screen, as his or her face would become warped on the screen if it becomes off center and part of the face enters the one of the warped areas.

Authentication in Low-Light Environments

To facilitate imaging, the screen on the mobile device may additionally be displayed with a white background, and the brightness of the screen may be increased to light up the user's face in dark environment. For example, a portion of the display could provide video feedback for the user to ensure he or she is imaging himself or herself, while the remaining portion of the display is configured to display a bright white color. Referring to the example shown in FIG. **11**C, this may be done by showing the video feedback **1116***c* on a center of the display, with the surrounding areas being displayed as bright white bars around the video feedback **1116***c*. In very dark situation, an LED flash on the back side of the mobile device and the back facing camera may be used. Alternatively, the camera may be configured to create an image using infrared light or other night vision techniques.

When infrared imaging is used as thermal imaging, further security enhancements are possible. Particularly, the thermal imaging may be analyzed to indicate whether the obtained images are from an actual user or are fraudulent images from a screen or other device. When a person is in front of an infrared thermal imaging camera, the heat radiation detected should be fairly oval shaped designating the person's head. In contrast, the heat radiating from a screen is typically rectangular. Further, the heat patterns detected in the actual person's face as well as the movement of the heat patterns in the images can be compared with expected heat patterns of a human face to distinguish the images from fraudulent authorization attempts using a screen.

Detecting Output from the Mobile Device

The display or other light source on the mobile device may further be utilized to provide additional security measures. During the authentication process described above, light from the display or other light source is projected onto the user's face and eyes. This projected light may then be detected by the camera of the mobile device during imaging. For example, the color tone detected on the skin, or a reflection of the light from the cornea of a user's eye may be imaged by the camera on the mobile phone. Because of this, random light patterns, colors, and designs may be utilized to offer further security and ensure there is a live person attempting authentication and not merely an image or video of a person being imaged by a fraudster.

As one example, when a user begins authentication, the authentication server may generate and send instructions to the user's device to display a random sequence of colors at random intervals. The authentication server stores the randomly generated sequence for later comparison with the authentication information received from the mobile device. During authentication imaging, the colors displayed by the device are projected onto the user's face, and are reflected off the user's eyes (the cornea of the eyes) or any other surface that receives and reflects the light from the screen. The camera on the user's mobile device detects the colors that are reflected off the user's skin or eyes (or other surface) and generates color data indicating the colors detected based on the screen projection. This data may be returned to the authentication server to determine if the color sequence or pattern sent to the mobile device matches that known sequence or pattern projected by the screen of the user device. Based on this comparison at the authentication server the authentication is a success or denied. The comparison with the random sequence of colors in the instructions may alternatively occur exclusively at the user device to determine that a live user is being authenticated.

As another example, when a user begins authentication, the authentication server may send instructions the user's device to display a randomly generated pattern which is then stored on the authentication server. This pattern may include graphics, text, lines or bars, flashing light patters, colors, a QR code, or the like. The randomly generated pattern is displayed during authentication imaging, and the pattern is reflected off the user's eyes (cornea). The camera of the user's device detects the reflected pattern off the eye of the user and processes the reflected, mirrored image of the displayed pattern. The processed pattern (such as being converted to a numeric value) is transmitted to the authentication server and compared to the pattern that was randomly generated and stored on the authentication server to verify if the pattern displayed by the screen, and imaged after reflection off the user's face establishes a pattern match.

If a match occurs, this establishes or increases the likelihood that a live person is being imaged by the device. If the pattern is not a match, or does not meet a match threshold level, then the authentication process may fail (access denied) or the account access or transaction amount may be limited. It is noted that this example could also be incorporated on desktop computer with a webcam that does not incorporate the enrollment movement and authentication movement described above. Further, this example may not only be incorporated with facial recognition, but could also serve as an added layer of security for iris recognition or any other type of eye blood vessel recognition, or any facial feature that is unique to a user.

When the above example is implemented on a desktop computer, eye tracking may also be utilized to further demonstrate the presence of a live user. For example, the screen could show a ball or other random object or symbol moving in a random pattern that the user watches with his or her eyes. The camera can detect this real-time movement to verify the user is live, and not a picture or display, and verify that the eye or head movements correspond to and match the expected movement of the object or words on the screen, which are known by the authentication system. Eye tracking can also be done by establishing an anchor point, such as via a mouse click at a location on the screen (if the user is looking at the location where the mouse click takes place), and then estimating where the user is looking at the screen relative to the anchor position.

The use of a moving object on the screen may also be beneficial during enrollment on either a mobile or stationary device. For example, while capturing the enrollment images, the device may display a moving digital object (such as a circle or words(s)) that moves around the screen so that the user is encouraged to follow it with his or her head and eyes. This movement may be involuntary from the user, or the

device may be configured to instruct the user to follow the object. This results in movement of the head and/or eyes creating small changes in the orientation of the user's head and face with the device camera, providing more complete enrollment information. With more complete enrollment information, the system may better ensure that the user will later be authenticated at a high rate even at slightly different angles during future authentication attempts.

Intuitive User Training and Enhanced Security by "Zooming"

In one embodiment, the system is configured to aid the user to easily learn to authenticate with the system. As shown in FIG. **13**A, once enrollment or authentication is begun as described previously, the system causes the user's mobile device **1310** to display a small oval **1320** on the screen **1315** while the mobile device **1310** is imaging the user. Instructions **1325** displayed on the screen **1315** instruct the user to hold the mobile device **1310** so that his or her face or head appears within in the oval **1320**. Because the oval **1320** is small, the user is required to hold the mobile device **1310** away from his or her body, such as by straightening his or her arm while holding the mobile device **1310**. The maximum arm length and face size is unique to the user. In other embodiment, the arm may not be fully straightened such as to accommodate operation when space is not available, such as in a car or in a crowded location. It is noted that while the small oval **1320** is shown centered in the display, it may be positioned anywhere on the screen **1315**.

Next, as shown in FIG. **13**B, the system causes the user's mobile device **1310** to display a larger oval **1330** on the display **1315**. The display **1315** may also show corresponding instructions **1335** directing the user to "zoom in" on his or her face to fill the oval **1330** with his or her face. The user does this by bringing the mobile device **1310** closer to his or her face in a generally straight line to the user's face (such as shown in FIGS. **7**A and **7**B) until the user's face fills the oval **1330** or exceeds the oval. In other embodiments, the large oval **1330** may simply be a prompt for the user to bring the mobile device **1310** closer to the user's face.

Thus, the system provides and teaches the user a simple method to provide enrollment and authentication images along with enrollment and authentication movement as explained above. The system may also teach varying enrollment and authentication movement by varying the location of the small oval **1320** on the screen **1315**, and by changing the order and the size of the ovals displayed. For example, the user may zoom in ½ way, then out, then in all the way, by moving the mobile device. The system may be configured to monitor that the camera's zoom function (when equipped) is not in use, which typically requires the user to touch the screen.

In one embodiment, the enrollment movement may be omitted, and the authentication movement may be compared to expected movement based on the prompts on the screen. For example, the device or authentication server generates a series of differently sized ovals within which the user must place his or her face by moving the mobile device held in the user's hand. In this manner, the authentication movement may be different during each login depending on the order, size, and placement of the ovals shown on the screen.

The system may also incorporate other security features when the "zoom in" movement is used as shown in FIGS. **13**A and **13**B. Typical cameras on a mobile device or any other device include a curved lens. This results in a barrel distortion effect in the resulting images taken by the camera. In some instances, this curvature may not be visible to the human eye, or may only be noticeable at certain focal lengths. The curvature or barrel distortion effect can vary with focal length or distance between the user and the lens. The degree of the barrel distortion effect is thus dependent on the type of optics used in the camera's lens and other factors.

The barrel distortion effect becomes more pronounced on an image of a person's face when the person images his or her face close to the lens. The effect results in the relative dimensions of the person's face appearing different than when the imaging is done with the person's face farther away from the lens. For example, a person's nose may appear as much as 30% wider and 15% taller relative to a person's face when the image is taken at a close proximity as compared to when the image is taken at a distance. The differences in the relative dimensions are caused by the relatively larger differences between the camera and the various facial features when the person is imaged close to the lens as compared to the relatively equal distances when the person is imaged at a distance farther from the lens.

Such differences have been found to be significant in many facial recognition algorithms. That is, a facial recognition algorithm may not recognize a live person imaged at a close proximity and a far proximity as the same person. In contrast, if a two-dimensional photograph of a person is imaged by the camera at both a close proximity and a farther proximity, the relative focal lengths between the lens and the two-dimensional image do not change so significantly. Thus, a facial recognition algorithm would recognize the two-dimensional photograph as the same person when imaged at both a close proximity and a distance farther from the lens.

This effect may be used to increase the security of the authentication system. For example, during enrollment, enrollment images may be provided by the user at both the close and far proximity from the lens, in addition to other positions through the movement. Later, during authentication, authentication images may be obtained at both the close and far distances from the lens to determine if they match with the enrollment information obtained from the enrollment images. Further, because the barrel distortion effect is expected when an actual, three-dimensional person is present, an absence of the relative change in the dimensions of the facial features alerts the system to a fraudulent attempt at authentication. This effect could not easily be re-created with a two-dimensional picture (printed photograph or screen) and thus, this step can serve as a secure test to prevent a two-dimensional picture (in place of a live face) from being used for authentication.

In other words, using this movement of "zooming" in and out on the user's face, two or more biometric profiles could be created for the same person. One of the multiple profiles for the person may be imaged farther from the camera, and one of the multiple profiles may be for the person imaged closer to the camera. For the system to authenticate the person, the authentication images and biometrics must match the two or more profiles in the enrollment images and biometrics.

In addition, the system may detect the presence of a real person as compared with a fraudulent photograph of a person by comparing the background of the images obtained at a close and a far proximity. When the mobile device **1310** is held such that the person's face fits within the oval **1320**, objects in the background that are almost directly behind the person may be visible. However, when the mobile device **1310** is held such that the person's face fits within the larger oval **1330**, the person's face blocks the cameras ability to see the same objects that are almost directly behind the person. Thus, the system may compare the backgrounds of the

images obtained at the close and the far proximity to determine whether the real person is attempting authentication with the system.

Of course, in FIGS. **13**A and **13**B, shapes or guides other than ovals **1320** and **1330** may be used to guide the user to hold the mobile device **1310** at the appropriate distance from his or her face. For example, the mobile device **1310** may show a full or partial square or rectangle frame. Further, the system may vary the size and location of the frame, such as the ovals **1320**, **1330** to add further security. For example, the system may require a medium sized frame, a small frame, and then a large frame. As another example, the system may require a small frame at a first location and a second location, and then a large frame. This may be done randomly to teach different users different enrollment and authentication movements.

The number of frame sizes presented to the user may also vary for a single user based on the results of other security features described herein. For example, if the GPS coordinates of the mobile device show that the device is in an unexpected location, more frames at different distances may be required for authentication. One or more indicators, such as lights, words, or symbols may be presented on the screen to be visible to the user to direct the user to the desired distance that the mobile device should be from the user.

In FIGS. **13**A and **13**B, the system may predict the expected barrel distortion of the images based on the mobile device used for enrollment and authentication, and based on known and trusted enrollment data. In addition or as an alternative, the known specifications of a mobile phone camera for a given model may be utilized to predict the expected distortion of the person's facial features at different distances from the lens. Thus, the authentication may be device dependent. Further, enrollment information from the user is not required at every possible distance from the camera.

For example, as described above, enrollment images and biometrics may be obtained for a user at two distances from the user. During authentication, multiple images are captured in addition to images corresponding the close and far distances of the enrollment images and biometrics. Based on the expected distortion of these intermediary images according to the distanced traveled by the device, the system may validate that the change in distortion of the images is happening at the correct rate, even though only two enrollment profiles are obtained.

The capturing of these images may be still images or video, such that frames or images are extracted from the video that is taken during the movement from the first position distant from the user and the second position proximate the user. Thus, it is contemplated the operation may capture numerous frames during the zoom motion and ensure that the distortion is happening at the correct rate for the head size and the movement of the mobile device distance based on data from the accelerometers, magnetometers, and so forth.

Over time based on accumulated data, or calculated data during design phase, the system will have data indicating that if a phone is moved a certain distance toward a user's face, then the distortion effect should fall within a known percentage of the final distortion level or initial distortion level. Thus, to fool or deceive the authentication system disclosed herein, the fraud attempt would not only need to distort the fraudulent two-dimensional picture image, but would also need to cut the background, and then make a video of the face, distortion, and background that does all of this incrementally and at the correct speed, all while not having any banding from the video screen or having any screen edges visible, which is very unlikely.

Many currently known facial detection and facial recognition algorithms are configured to look for a small face within an image. Thus, to ensure that the facial detection and recognition algorithms detect and recognize the user's face in the zoomed in image (FIG. **13**B), the system may add a large buffer zone around the image taken at a close proximity. This creates a larger overall image and allows current facial detection and recognition algorithms to detect and recognize the face, even where the face of the user is large in the original image.

When the enrollment and authentication movement resulting from the process described with FIGS. **13**A and **13**B is used, the eye tracking security features described above may also be enhanced. For example, when the user is instructed to bring the mobile device **1310** closer to his or her face to fill the oval **1330**, the QR code, a random shape, a bar code, color, text, numbers or any other visual indictor may be displayed on the screen. At this close distance, the reflection of the displayed indicator off the user's eye or face may be more easily imaged by the camera. Furthermore, eye movement, blinking, and the like to determine the "liveness" of the person being imaged may also be more easily obtained at the close proximity.

In one embodiment, at least one blink is required to prove liveness for authentication. In another embodiment, blinks may be counted, and the number of blinks may be averaged over time during authentications. This allows for an additional factor in authentication to be the number of blinks observed during the motion. If a pattern of when the user blinks during the motion is observed, the system may verify that the user blinks at the expected time and device location during the motion during future authentication attempts.

In other embodiments, the size or location of the oval or frame may change to sizes or locations other than that shown in FIGS. **13**A, **13**B such that the user must position and/or angle the phone to place his or her face within the oval. This establishes yet another method of insuring liveness of the user.

In one exemplary method, the mobile device is positioned at a first distance from the user and a first image captured for processing. This distance may be linearly away from the user and in this embodiment not in an arc or orbit. This may occur by the user moving the mobile device, either by hand, or by the mobile device being on a movable device or rail system. Or, the lens system may be adjusted if in a fixed system to change the size of the user's face in relation to the frame size. Alternatively, the user may stay stationary, the multiple cameras may be used, or camera may move without the user moving. Once some form of movement (from a device, camera, lens, or user) has occurred to establish the camera at a second distance, a second image is captured for processing. Movement from the first position to the second position may be straight toward the user. Processing occurs on both images.

The processing may include calculations to verify a difference between the two images, or a difference in biometrics obtained from the two images, that indicates that a real person is being imaged. Processing may occur to compare the first authentication image to a first enrollment image (corresponding to the first distance) to determine if a match is present and then compare the second authentication image to a second enrollment image (corresponding to the second distance) to determine if a match is present. If a match occurs, then authentication may proceed.

Variations on these methods are also possible with the system requiring a match at the first distance, but a failure to match at the second distance, thereby indicating that the second image is not of a two-dimensional picture. The processing resulting in a match or failure to match may be any type image or facial recognition processing algorithm. As with other processing described herein, the processing may occur on the mobile device, one or more remote servers, or any combination of such devices.

All the processing described herein may occur on only the mobile device, only a remote server, or a combination there. The biometric data may be stored on the mobile device or the server, or split between the two for security purposes. For example, the images could be processed on the mobile device, but compared to enrollment data in the cloud or at a remote server. Or, the images could be sent to the cloud (remote server) for processing and comparison.

Touch Screen Enhancements

Additional added security modifications may include information about a user's finger. Many mobile devices with touch screens can detect the location and approximate size of a user's touch on the screen. Accordingly, an approximate size of a user's finger or thumb may be measured by the system. In addition to the size of a finger, an orientation angle of the finger or whether the fingers or thumbs of the right or left hand are used can be detected.

In one embodiment, a user selects an account to open, begins enrollment imaging, or begins authentication imaging by touching the touchscreen of the user device. The authentication system may thus detect whether the touch by a user during authentication corresponds with previously stored enrollment information including the size of the user's finger or thumb, amount of pressure applied to the screen and whether the user is right or left handed. This adds an additional security layer for the authentication system.

Furthermore, the authentication system may require that the user initiates an authentication by touching a fingerprint reader or the touchscreen in one or more predetermined manners. In one embodiment, as shown in FIG. **14**, a touchscreen **1410** may be divided up into predetermined regions **1420**. For example, there may be nine equal, circular, square, or other shaped regions **1420** on the touchscreen **1410** of the mobile device. During enrollment, the user selects one of the regions **1420** of the screen **1410** to touch to initiate authentication. During authentication, if the preselected region **1420** is not touched to begin authentication or during the entire authentication process, then authentication is denied. This is but one possible design possibility and other design options are contemplated.

The regions **1420** on the touchscreen may be visually represented by a grid, or may not be displayed at all on the touchscreen **1410**. As shown in FIG. **15**, in addition to or in place of the regions **1420**, buttons **1520** may be displayed on a touchscreen **1510**. Here, the user may initiate the authentication by pressing one or more of the buttons **1520** in a predetermined pattern. The user may also initiate authentication via a predetermined swiped pattern. The position to be touched by the user may change with each authentication attempt and may be conveyed to the user through any instructions from the authentication server, such as a code, number, letter, color, captcha or other indicator.

Voice Parameters

It is also contemplated that the user could record their voice by speaking a phrase while recording their images during the enrollment process when first using the system. Then, to authenticate, the user would also have to also speak the phrase when also moving the mobile device to capture the image of their face. Thus, one additional path parameter may be the user's spoken voice and use of voice recognition as another layer or element of the authentication process.

Image Quality Assurance

The authentication system may also process the images received from the mobile device to determine if the images are of sufficient quality. For example, the system may check the images for blurriness caused by the images being out of focus or by the camera lens being obscured by fingerprints, oils, etc. The system may alert that user that the quality of the images is insufficient (or too bright or too dark) and direct the user to adjust a focus, exposure, or other parameter, or to clean the lens of the camera.

Autofocus

The authentication system may also utilize an autofocus feature when the mobile device camera is equipped with such. For example, when an actual, three-dimensional person is being imaged, the system checks to ensure that the sharpness of the image changes throughout as the camera perform auto-focusing. In another embodiment, the system may control the autofocus so that the camera focuses on a first location or distance to check for sharpness (in focus) of a portion of the image containing a face. The system then controls the camera to focus at a second location or distance where the presence of a face is not detected and check for sharpness (in focus) of a portion of the image. If a three-dimensional person in a real environment is being imaged, it is expected that the focal length settings should be different at the first and second locations, which suggests a real person is presently being imaged. However, if the focal lengths of both locations are the same, this indicates that a two-dimensional photograph or screen is being imaged, indicating a fraudulent login attempt.

The system may also control the auto-focus of the device to check for different focal lengths of different features in the image. For example, when a person's face is imaged from the front, a person's ear is expected to have a different focal length (more distant) than the tip of a person's nose.

Images of Login Attempt

The authentication server may also be configured to store the authentication images for a predetermined length of time. The images may provide additional security benefits as evidence of a person attempting to log in to a user's account. For example, the system may store a predetermined number of prior log in attempts, such as twenty login attempts, or store images from login attempts for a predetermined time period, such as during the past seven days or weeks. Any fraud or attempted fraud will result in pictures of the person attempting the login being stored or sent to the authentication server of the account server.

The mere knowledge that photos will be taken and sent is a significant deterrent to any potentially dishonest person because they know their picture will be taken and stored, and it is an assurance of security to the user. Likewise, any attempted and failed attempt can have the photo stored and indicator of who is attempting to access the account. It is also contemplated that an email or text message along with the picture of the person attempting the failed log in may be sent to the authorized user, so they know who is attempting to access their account. This establishes the first line of security for the account as the user with the photo or image also being possessed by the authentication server.

Adaptive Match Thresholds

Further, the level or percentage of correspondence between the enrollment information and the authentication

information to authenticate the user may change over time. In other words, the system may comprise an adaptive threshold.

After a user regularly uses the authentication system described above, the user will have logged in with the system by moving the mobile device in the predetermined path relative to his or her head many times. Accordingly, it may be expected that as the user will gain experience using the authentication system, and that the user will gradually settle into a comfortable and standardized motion path. In contrast, the initial enrollment movement of a user will likely be the most awkward and clumsy movement as the user has little experience with the authentication system.

To make the authentication system more convenient for the user without losing security, the adaptive threshold system allows the enrollment movement to adapt so that the user is not locked into the awkward and clumsy initial movement as the enrollment movement. To facilitate this, upon each successfully authorization, the successful authorization movement is stored, and the motion path is added to a list of acceptable motion paths. The list of acceptable motion paths may be limited to a predetermined number of paths. When a new successfully authorization is completed and the list of acceptable motion paths is full, the older enrollment motion path is deleted and the newest is stored in its place. Alternatively, the motion path that is least like the other motion paths stored on the list may be deleted. Thus, by storing the most alike or newest motion paths, the enrollment movement may slowly adapt over time as the user because familiar with the system and settles into a comfortable motion path for authentication.

In addition, other enrollment information may adaptively change in a similar manner as the user information. For example, successful authentication photos or biometric information can be stored as part of the enrollment information, and old enrollment information may be discarded over time. In this manner, the authentication system can be convenient for a user even over a long period of time as the user experiences aging, facial hair growth, different styles of makeup, new glasses, or other subtle face alterations.

Determining how much variance is allowed over time in the motion path or the biometric information, or both may be set by the entity requiring authentication to meet that entity's security requirements. Time or number of scans after the initial enrollment can be used to modify the adaptive threshold. For example, during a first few days after enrollment, the threshold may be lower while a security threat is low and the differences in paths are likely to be higher. After several authentications or several days, the threshold may increase. The threshold further may be set based on trending data of either the motion path or biometric information. For example, the threshold may be more lenient in a direction the data is trending, while having a tighter tolerance for data against the trend.

A temporal aspect may also be added along with the location information. For example, if the user conducts and authenticates a transaction near his home, and then one hour later another transaction is attempted in a foreign country, the transaction may be denied. Or it may be denied if the distance between the prior authentication location and the next authentication location cannot be traveled or is unlikely to have been traveled in the amount of time between login or authentication attempts. For example, if the user authenticates in Denver, but an hour later an attempt is made in New York, Russia or Africa, then either first or second attempt is fraudulent because the user likely cannot travel between these locations in 1 hour.

Further, if the next transaction is attempted at a more reasonable time and distance away from the first transaction, the level of correspondence threshold may be raised to provide added security, without automatically denying the transaction. Likewise, an altimeter may be used such that if the altitude determined by the mobile device is different than the altitude of the city in which the user is reported to be located, then this may indicate a fraud attempt. Thus, altitude or barometric readings from the mobile device may be used to verify location and can be cross referenced against GPS data, IP address or router location data, or user identified location.

Random Image Distortion

To provide an additional layer of security to the facial recognition authentication system, the system may utilize random image distortion. For example, a user may be assigned a random distortion algorithm upon enrollment into the system. The distortion algorithm may include such distortions to the image as widening or narrowing the person's face by a predetermined amount, adding or superimposing a predetermined shape at a predetermined position on the user's face. As one example of this, the distortion may be a circle superimposed at 100 pixels above the user's left eye.

With the uniquely assigned distortion on the images from the user, the biometric data for that user will be unique to the account or device used by the user. That is, the enrollment biometrics stored on the authentication server or on the mobile device will reflect not only the facial features of the user, but also will reflect the uniquely assigned image distortion. Thus, even if an accurate, fraudulent representation of a person were used on a different device or via a different account, the proffered authentication biometrics would not sufficiently correspond due to a different or an absence of the unique distortion. Thus, the overall security may be enhanced.

Security Layers

It is noted that each of the above embodiments, modifications, and enhancements may be combined in any combination as necessary to create multiple layers of security for authentication. For example, the facial recognition may be combined with motion detection or path detection, or operate independently of these features for authentication. Further, when more than one of the above described enhancements or modifications are combined, the authentication system may be configured so as not to provide any feedback or indication on which layer failed authentication.

For example, when a predetermined touch pattern to initiate authentication is combined with the authentication movement and facial authentication, the system does not indicate whether a touch pattern was incorrect, or the authentication movement or authentication images failed to correspond to the enrollment information. Instead, the system provides an identical denial of authentication no matter what failure occurs. This is the case when any number of the security features described above are combined. In this manner, it is difficult for a fraudster to detect what aspect of the fraudulent credentials must be corrected, further enhancing the security of the system.

All the above features may be incorporated together, or only some features may be used and others omitted. For example, when the device prompts the user to move the device so that the user places his or her head within a first small frame (such as an oval) then to a second large frame (such as in FIGS. **7**A, **7**B, **13**A, and **13**B), the system may be configured such that facial recognition need not be performed on the image(s) in the first frame (distantly

captured frames). The security of the system is maintained by performing facial recognition throughout the imaging at some point between the first and second frames, and at the second frame. This may especially be true when also integrated another layer of security, such as checking eye tracking following a moving object on the screen, or reading a reflection of a QR code or random shape off the user's eye. In another embodiment, when two or more cameras are used creating three dimensional, stereoscopic images, the facial recognition may not be performed at the first, far away frame, but instead the liveness of the person may be validated at the closer in frame only after the movement of the device. In still other embodiments, other security layers may be used, and the motion parameters may be omitted. Such combinations may be beneficial for larger or stationary devices, such as gaming laptop computers, personal desktop computers, a stationary kiosk, or the like.

Example Applications

Likewise, although described herein as financial account authentication, the authentication using path parameters and image data may be implemented in any environment requiring verification of the user's identity before allowing access, such as auto access, room access, computer access, web site or data access, phone use, computer use, package receipt, event access, ticketing, courtroom access, airport security, retail sales transaction, IoT access, or any other type of situation.

For example, an embodiment will be described where the above authentication system is used to securely conduct a retail sales transaction. In this embodiment, a user is enrolled with the authentication server or an authentication application on the mobile device as described above and has generated enrollment information including enrollment images and/or biometrics, and enrollment movement. In this example, the user initiates or attempts to complete a transaction at a retail establishment with a credit card, smart card, or using a smart phone with NFC capabilities.

The user begins the transaction by swiping a credit card, smart card, or using an application on a smartphone with NFC capabilities to pay for goods or services. The retail establishment would then authorize the card or account with the relevant network of the financial institution ("Gateway"). For example, the retail establishment, through a Gateway such as one operated by VISA or AMERICAN EXPRESS would determine whether the account is available and has sufficient available funds.

The Gateway would then communicate with the authorization server to authorize the transaction by verifying the identity of the user. For example, the Gateway may send an authorization request to the authentication server, and the authentication server then sends a notification, such as a push notification, to the user's mobile device to request that the user authenticate the transaction.

Upon receipt of the notification from the authentication server, such as through a vibration, beep, or other sound on the mobile device, the user may then authenticate his or her identify with the mobile device. The authentication server may also send information concerning the transaction to the user for verification by the user. For example, the authentication server may send information that causes the mobile device to display the merchant, merchant location, and the purchase total for the transaction.

Next, as before, the user may hold the mobile device and obtain a plurality of authentication images as the user moves the mobile device to different positions relative to the user's head. While moving the mobile device to obtain the authentication images, the mobile phone further tracks the path parameters (authentication movement) of the mobile device via the gyroscope, magnetometer, and the accelerometer to obtain the authentication movement of the device. The mobile device may then send the device information, the authentication images, and the authentication movement to the authentication server. In other embodiments, the mobile device may process the images to obtain biometric data and send the biometric data to the server. In still other embodiments, the mobile device may process the images, obtain the authentication information, compare the authentication information to enrollment information stored on the mobile device, and send pass/fail results of the comparison to the authentication server.

The authentication server may then authenticate the identity of the user and confirm that the user wishes to authorize the transaction on his or her account if the device information, authentication images and/or biometrics, and authentication movement correspond with the enrollment device information, the enrollment images and/or biometrics, and the enrollment movement. The authentication server then transmits an authorization message to the Gateway. Once the gateway has received confirmation of the authorization, the Gateway then communicates with the retail establishment to allow the retail transaction.

Several advantages may be obtained when a retail transaction is authorized utilizing the above system and method. Because the identity verification of the user and the confirmation of the transaction is completed via the authentication system and mobile device, there is no longer a requirement for a user to provide his or her credit card or signature, or to enter a pin number into the retailer's point of sale system. Further, the retail establishment does not need to check a photo identification of the user. The above method and system also has the advantage that it provides secure transactions that can work with mobile and online transactions that do not have cameras, such as security cameras, on the premises.

In the secure retail transaction described above, the user obtains the total amount due on his or her mobile device from the retail establishment via the Gateway and authentication server. However, in one embodiment, the mobile phone may use the camera as a bar code, QR code, or similar scanner to identify the items and the prices of the items being purchased. The mobile device may then total the amount due and act as the checkout to complete the transaction with the retail establishment.

In another embodiment, a user of the application may want to anonymously pay an individual or a merchant. In this instance, the user would designate an amount to be paid into an application, and the application would create a unique identifying transaction number. This number may then be shown to the second user, so the second user can type the identifying transaction number on an application on a separate device. The unique identifying transaction number may also be sent from the user to the second user via NFC, Bluetooth, a QR code, or other suitable methods. The second user may also type the amount and request payment.

Upon receiving the payment request and unique identifying transaction number, the authentication server may send a notification to the first user's mobile device to authenticate the transaction. The user would then verify his or her identity using the facial recognition authentication system described above. The user may alternatively or additionally verify his or her identity using other biometric data such as a fingerprint or retina scan, path based motion

and imaging, or the user may enter a password. Upon authentication, the user's device would send a request to the user's payment provider to request and authorize payment to the second user. In this manner, the payment may be done securely while the users in the transaction are anonymous.

According to one embodiment, as an additional measure of security, the GPS information from the mobile device may also be sent to the authentication server to authenticate and allow the retail transaction. For example, the GPS coordinates from the mobile device may be compared with the coordinates of the retail establishment to confirm that the user is actually present in the retail establishment. In this manner, a criminal that has stolen a credit card and attempts to use the card from a distant location (as compared to the retail location) is unable to complete a transaction because the user's phone is not at the location of the retail establishment. IP addresses may also be used to determine location.

As explained above, the level or percentage of correspondence between the enrollment information and the authentication information to authenticate the user may also be adjusted based on the coordinates of the GPS of the mobile device. For example, if the retail establishment and GPS coordinates of the mobile device are near a user's home, then the level of correspondence may be set at a lower threshold, such as at a 99% match rate. Alternatively, if the location is very far from the user's home, and is in a foreign country, for example, then the level of correspondence may be set at a higher threshold, such as at a 99.999% match rate.

Biometric Identification Using Root Identity Information

Most biometric identification systems in recent years use devices such as smartphones to capture biometric data (e.g. a digital photograph or scan of a fingerprint). This biometric data is matched to preexisting biometric data either on the device (in compliance with the FIDO Alliance standards) or on the cloud (a remote computing device) where the biometric data is sent to servers and compared to preexisting data.

However, with the ability to convert images or other biometric data into biometric templates on the device without sending the raw data files up to a server, an additional option is available. Existing raw biometric data such as facial images, fingerprint scans, etc. or converted biometric templates may be downloaded to the device.

The downloaded biometric data may then be converted and/or compared to a biometric template that was created from the data captured on that device and previously uploaded to the cloud or captured and uploaded to the cloud from a different device.

This allows a third party to provide an existing root identity profile for comparison to the biometric information obtained at the device for authentication. For example, the root identity profile may comprise an image or other biometric reading from a customer that was captured and verified in a bank branch, from a DMV file, or from another authorized and trusted source. The bank branch, government entity (such as DMV), or other trusted source may have a secure camera, fingerprint reader, or other type of biometric capture device which captures the biometric information from the user in a trusted manner to create the root identity profile. The root identity profile may alternatively or additionally comprise biometric templates created from the verified image or biometric reading. In this manner, the identification match at the device has in increased level of trust based on the verified, third-party root identity profile. The biometric template is defined as data derived from biometric identity profile. By way of example, if a trusted image of a user is captured, that trusted image may be or may be a part of the root identity profile. That trusted image may be processed to create a biometric template or be a part of a biometric template. The processing may transform the image to data (the biometric template) which may be used in the authentication process but the original image may not be recreated from the biometric template.

FIG. **16** shows a system for biometric identification using root identity information, according to an exemplary embodiment. The system includes a user device **1612** such as a smart phone or tablet computing device that comprises one or more biometric sensors such as a camera **1614** and fingerprint scanner **1615**. The device **1612** communicates with a network **116** such as the Internet.

A root identity server **1630** is also connected to the network **116**. The root identity server **1630** may be a bank server, a government server, or other "trusted" server that stores the root identity information including biometric information and/or biometric template(s). The root identity server **1630** is connected to biometric sensing devices such as a camera **1632** or fingerprint scanner **1634**. It is contemplated that the camera **1632** may be part of a computer, standalone device, or a mobile device, all of which are trusted. The camera may be fixed or the distance between the user and the camera **1632** may vary during the capture of the trusted images, such as an image captured from a far distance to an image captured at a close distance. The distance may be similar to the distance at which a user could establish while holding their mobile device to image themselves. An authentication server **1620** providing an application such as facial recognition algorithms and the like is also connected to the network **116**. Also part of the embodiment of FIG. **16** is a third party server **1640**, which may be a root identity server or a third party server, such as for a business or any other type entity. As described above, an authentication server **1650** may also be part of the system. The authentication server **1650** may be configured to perform authentication processing, such as by executing one or more authentication algorithms on biometric data to evaluate and authenticate a user. In one embodiment, the authentication servers **1650** may be configured as one or more of the servers **120** as shown and described above in FIG. **1**. FIG. **20** illustrates exemplary server hardware. Any means of communication between the elements of FIG. **16** may occur including wired and wireless connections.

FIG. **17** shows a method for authenticating using a root identification system, according to one exemplary embodiment. Authentication using facial recognition as the biometric information analyzed for a root identity profile may work as explained in the following exemplary embodiment. First, in step **1701**, biometric information is captured via a trusted device (camera **1632** or scanner **1634** in FIG. **16**). The device is considered trusted because the biometric information collected at the device is verified by a trusted institution such as a bank or government agency. This captured data may be defined as a root identity profile. It may be stored in a sever **1630** or any secure database. In one embodiment, the root identity profile may include DMV (Department of Motor Vehicle) images, or any government based or collected trusted biometric information. A root identity profile is established in step **1703** that comprises the biometric information from the trusted device and links the biometric information to a user identity, such as by name, social security number, other identifying number, driver license number, financial account number, account name, or any other type information. This root identity profile is stored on

the server, such as server **1630**, **1640**, **1650** or any other database. The trusted source can be a business or government entity.

In step **1705**, biometric information such as an image that contains data about the face of an individual from the root identity profile is sent from the server **1630** to the smart device **1612** upon an authentication request from the smart device **1612**. The term smart device (which is used as the authentication device) may be any type computing device, such as computer, mobile device (tablet, mobile phone), ATM, kiosk, or any other device which is used to conduct an authentication session to verify identify. The smart device (authentication device) may belong to the user, business, government entity or any other entity seeking to use the authentication system to verify identity. For example, an auto dealership may wish to verify identify before releasing the new automobile to the purchase. If the authentication device is an ATM, authentication may be required before a cash withdrawal occurs. If a point of sale, the jewelry store for example, may wish to verify identify before providing the diamond ring. In a government agency, the government agency may want to verify identify before releasing the pension, retirement benefit, medical services, or tax return.

The smart device **1612** may be referred to as the authentication device because it is the device that is used for authentication. The user of the smart device **1612** then articulates the camera **1614** so that the user's face can be captured by the device's camera **1614**, in step **1707**. As described above, one or more images may be captured. The images may be captured with the camera at different distances from the user or the user at different distances from the camera. The biometric data (profile or template) downloaded from the server **1630** to the authentication device can now be compared in step **1709**. In one embodiment the trusted template or the trusted image may be downloaded to the smart device (authentication device). For example, each trusted image is converted into a biometric template by a facial recognition algorithm for comparison. Upon comparison, if the templates are similar enough based on the thresholds set by, for example, an application publisher or entity requesting authentication, the smart device captured image (device identity) and the previously captured image (root identity) can be considered a match in step **1711**. Thus the person is who they assert to be and identity is verified. Access may then be granted, or the business transaction completed, travel allowed, or any other activity authorized, or the signup/enrollment process may then be completed based on the matching images or templated in step **1713**. If there is no match in step **1711**, the access is denied in step **1715**.

As describe above, the trusted biometric information (profile or template) is sent from a remote server to the authenticating device. In other embodiments other data exchange schemes are possible. In one embodiment, the trusted biometric information stored on a root identity server **1630** and the authentication biometric information (captured during an authentication session) is uploaded to the root identify server **1630**. The root identify server **1630** is equipped with a memory (storing software—machine readable code) and a processor configured to execute authentication algorithms. The authentication algorithms may be for identity verification, liveness, or both. The results of the authentication request are the return to the authentication device which may be any of the servers or devices shown in FIG. **16**.

In another embodiment an authentication device **1612** (or server) initiates an authentication session. Authentication biometric data is captured and processed. The resulting authentication biometric information is uploaded to an authentication server **1650**. The authentication server **1650** is configured with memory, machine readable code, and a processor and configured to process/compare biometric information as part of an authentication session. The authentication server **1650**, upon initiate of the authentication session obtains root biometric identity information corresponding to the user, the authentication retrieves root biometric identity information for the user. The root biometric identity information may be stored on the authentication server **1650** or requested and received from the root identity server. In some cases, such as in the case of government controlled identity data, the root biometric identity information may be stored on a secure government server functioning as the root identity server. Upon receipt of the root biometric identity information from the root identity server **1630**, the authentication server **1650** perform identify verification by comparing the root biometric identity information with the authentication biometric information (the profile information or the template) by comparing the root biometric identity information with the authentication biometric information.

In another embodiment, authentication (includes liveness termination, identity verification, or both) occur on both the authentication device and a remote server, such as the authentication server or the root identity server. In this configuration, the smart device will receive the authentication session biometric information captured from the user and also the trusted root identity information from the root identity server and then perform a comparison to determine if there is a match. If there is a match, then the biometric information captured by the smart device (authentication session biometric information capture device) will be sent to the authentication server **1650** of the root identity server **1630** and the processing and comparison will be repeated there. This provides a double verification process and would prevent the smart device from in accurately or fraudulently reporting a successful authentication.

It is also contemplated the liveness determination may occur in all of these embodiments as part of the authentication. While identity verification against trusted root identity information is a valuable part of the process, so to is liveness determination. As such it is contemplated that identity verification may occur independently, liveness determination may occur independently, or both may occur as part of a verification session. In one embodiment and as discussed above, the liveness detection is a comparison between two images of the user captured at different distances between the user and the camera (due to a change in distance between the camera and the user from either camera movement, user movement, or both). In one embodiment, the liveness detection occurs before identity verification. It may serve as a pre-requisite that must successfully occur before identity verification will be attempted. In one example embodiment, the liveness detection occurs as is described herein. If the process determines that other than a live person is conducting the authentication attempt, then the authentication session ends and no additional biometric information is collected, and the trusted root identity information is not downloaded and compared, or the biometric information captured by the smart device is not uploaded to the authentication server or the root identity server. Alternatively, if the liveness determination determines that the person conducting the authentication session is a live person, then either root biometric information is retrieved from root biometric server or the biometric information collected

during the authentication is uploaded to the authentication server or root identity server for identity verification. Using the liveness termination as a prerequisite before identity verification provides several benefits. On benefit is an elimination of personal biometric data information over the network, reduced bandwidth usage, faster authentication session conclusion, and less burden on processing resources of the authentication server or the root identity server, which in turn saves costs by requiring less network and server resources.

The benefits of this system include but are not limited to the ability to match previously captured biometric data from a different device with a new device while no Biometric Data leaves the new device during the matching. This is important in some regulatory environments and industries.

For facial recognition systems with a server component, the same facial recognition algorithm can be loaded onto the server as is running in an application on the smart device. This allows only the template to be transferred to the device instead of the biometric reading itself (e.g. the facial images, fingerprints scans, etc.). For example, in step **1705**, the biometric information may be the biometric template instead of an image from the root identity profile. The algorithms located on different devices/servers must be configured so that the templates they create are homogenous and can be compared. That is, if the algorithms output data in different formats, the resulting biometric templates/data format is incompatible, and no matching can occur because the similar facial features would not be represented by similar biometric template data patterns. The term template is defined herein as biometric data points represented by a string of numbers or other data formed in a consistently formatted pattern so that similarities and differences may be determined via various methods of comparison.

In an embodiment where on the template is transferred to the device, the root identity established in step **1703** may include a biometric template created from a biometric algorithm, such as a facial recognition algorithm. For example, an image that includes the face of an individual that captured with a trusted device (camera **1632** at a bank branch, DMV, etc.) is sent to the server **1630** where it is converted to a biometric template with a facial recognition algorithm. As mentioned above, the biometric template from the root identity profile is sent to the smart device **1612** upon an authentication request in step **1705**. This can be referred to as the root identity biometric template. The method proceeds as previously explained with reference to FIG. **17**, where the biometric templates are compared in step **1709**.

In another example, two or more biometric modalities could be used together such as fingerprints, face, and voice. Another example of the method of FIG. **17** using two or more biometric modalities may work as follows. First, images of a user's face, scans of the user's fingerprints, as well as a recording of the user's voice are captured with trusted devices in step **1701** (e.g. devices **1632**, **1634** at a bank branch, a DMV, etc. where the identity of the captured data is verified) to establish a root identity in step **1703**. The images, scans, and recording may be considered root identity biometric data because this information is captured from a trusted source. In step **1707**, the user of the smart device (1) presses one or more of his/her fingers on a fingerprint sensor, and/or takes a photo of their fingers; (2) articulates the camera so that the user's face can be captured by the device's camera; and/or (3) speaks words into the device's microphone to be recorded. The device recorded data may be considered device identity biometric data.

The root identity biometric data and the device identity biometric data are converted into biometric templates (root identity biometric templates and device identity biometric templates) by fingerprint recognition, facial recognition, and/or voice recognition algorithms. In some instances, the root identity biometric data may be converted into the root identity biometric templates at the server, and the templates may be sent to the device. The root identity biometric templates and the device identity biometric templates are compared in step **1709**, and if the templates are similar enough based on the thresholds set by, for example, an application publisher, the root identity templates and the device identity templates can be considered a match. Based on the match, access may be granted, or a signup/enrollment process can be completed in step **1713**.

In another embodiment, in step **1709**, the images and/or the biometric template(s) from the user's device may be uploaded to the server where they can be stored and/or compared with the root identity biometric images and/or template(s). Then, if the user wishes to replace the original device or add a second user device to the account, both the root identity image(s) and/or template(s) the device identity image(s) and/or template(s) captured on the first device can be sent to the second device during set up or enrollment for comparison and matching. This daisy-chains the root identity from the server to the first device identity, and then again to the second device identity. If no root identity image and/or template has been captured previously and stored on the server, the image and/or template that is uploaded from the first device can still provide added security. If the user chooses to add a second device to an account, the image(s) and/or template(s) from the first device can be sent to the second device, and the comparison described above may again occur by the user using the second device to authenticate. The authentication would compare the biometric information sent from the first device to the second device with the user biometric data captured using the second device to verify it is the same user. This allows the user to add a second device with increased security because the user identities on both devices were deemed to be a match.

In addition, when the image(s) and/or template(s) are uploaded to the server, the on-server comparisons between the image(s) and/or template(s) can be performed independent from a comparison performed directly on the device. This offers a significant increase in security because even if a hacker was somehow able to manipulate the user's device to send a "Match" result back to the server, the server would also compare the same image(s) and/or biometric template(s). Hence, the authentication may occur at two or more devices or servers to make the system more secure. If less than all or a predetermined number of device/servers to not authenticate, then a match is not declared. Thus, the server would also need to determine that the image(s) and/or biometric template(s) were a match using the same thresholds. Therefore, the hacker would not only need to compromise the user's device, but also the one or more servers to defeat the security.

In addition to the biometric matching, liveness checks may be included on the device portion of the matching as well as the server portion, as have been described in detail above. For example, additional information such as device movement, skin texture, three-dimensional depth information can be used to help determine that the biometric data being presented to the camera is from a live human being and not a photo, video, or mask spoof.

Remote Collection of Biometric Images/Templates

To verify biometric data, an individual typically is required to enter a bank branch, a government office such as a DMV or police station, or other "trusted" location to have his/her biometric data collected. For example, a bank may require a photograph, a fingerprint, or a voice recording to open certain types of accounts. The obtained biometric data is then linked to the person and the account. This in-person collection of biometric data has typically been required because there was no other way to trust that an individual was indeed who they claimed to be. Through the in-person collection, the identification is verified by, for example, the person providing documents with their name and photograph issued by a governing body.

However, according to an exemplary embodiment disclosed herein, an individual may provide his/her own biometric data using any smart device with a biometric sensor or camera to be verified without in-person verification. In fact, according to the disclosed embodiments, businesses, organizations, government entities, account providing institutions, or financial institutions may trust with more certainty than ever before that the biometric data provided is from the correct individual and not an imposter, hacker, or bad actor.

FIG. **18** shows a method of remotely establishing a biometric identity, according to one exemplary embodiment. In this embodiment, an individual first downloads an application to his/her smart device from an institution with which he/she either has an account, or with which he/she wants to open an account in step **1801**. Upon opening the application and when prompted, the person presents his/her face, fingerprint, etc. to the camera or sensor. The biometric data is captured and stored on the device as "enrollment data" in step **1803**. This process is described above in detail as the enrollment process or storing the baseline biometric information. In some embodiments, the enrollment data is sent to a server and stored on a server or database.

Next, the user makes a payment or a deposit to the institution in step **1805**. For example, if a lending institution has provided a mortgage to the user, then the user would enter his/her payment account information into the application so that the institution could collect payment. When the payment information and authorization is transmitted to the lending institution some or all of the biometric enrollment data from the user is collected and is transferred to the lending institutions server with it. Because the payment is made by the user for the user's debt, which causes money to flow away from the user and thus would not occur by a potential hacker or person committing fraud, the resulting biometric data collected as part of the transaction is considered as trusted. This step may be defined as performing an act that is a detriment to the user or an act from which the user does not benefit. While this act may typically concern money payments to a third party, it could also be an act like performing a service or task, filing taxes, medical check-up, donating blood, a DNA test or sample, or any other event that a person intent on committing fraud would likely not do repeatedly.

Later, when the user again opens the application to conduct another transaction (such as a payment or other act), the user is again prompted, as part of the payment, to present his/her biometric information to the camera or sensor, and new biometric templates can be created in step **1807**. The new biometric templates are compared to the previous "enrollment data" on the device and/or the new templates can be sent to the server for comparison in step **1809**. In some embodiments, the device may compare the templates by downloading the enrollment data templates from the server to the device for matching. Or, the newly acquired template may be uploaded to an authentication server for comparison to enrollment templates (biometric information) or previously recorded templates (biometric information).

When it is determined that the new biometric information and/or templates do not match the enrollment data, then the transaction may be denied as shown in step **1811** and the root identity will not have the unmatched biometric information added to it. Or, the transaction may be completed, but the new unmatched biometric information is not added to the database or the account may be flagged for an attempted and failed biometric information match attempt. However, when the new biometric information sufficiently matches the enrollment data, the transaction may be authorized as shown in step **1813**. Furthermore, when there is a match, the trust level of the biometric data appended to the user's profile is increased.

Because, in this embodiment, the user is sending funds into the account, for example to pay a debt or to make a deposit, he/she (the user) has an incentive to be able to later access the account that contains those funds or that has had debt reduced. Thus, over time as several deposits and/or payments are made with matching biometric templates, the trust in the identity of the user performing the transactions increases as shown in the loop of steps **1807**, **1809**, and **1813**. The trust is increased because it is not likely that a person attempting to commit fraud or identity theft now or in the future would pay another person's debts (bills), or perform other acts that do not benefit them or that cause a detriment to them (such as for example a payment). This also provides repeated links or association between the user and the account to build trust that the user is who they say they are the person associated with that account.

The resulting biometric information may be later used in other environments and applications beyond that one account after it become trusted. For example, once trust is built with a biometric profile for a user, that same biometric profile may be considered as trusted and used for purchases or access control.

In one embodiment, to limit liability to third parties or other entities, access of withdrawals for even a trusted biometric profile can be limited to the same amount or less than has been deposited or paid in total by the user. For example, if a user pays a $3,000 mortgage payment, loan payments, or bank deposits, each month for three months using his/her smart device and using his/her face to identify themselves each time, the lending institution may be willing to allow that person to transfer up to $9,000 (or some other amount related to the trusted payments made) from a different account that the bank has for the user, such as a checking account. Likewise, if a trusted biometric profile is established, it may be assigned a trust score, which designates the amount or degree of trust associated with that trusted biometric profile. Based on the trust score, third parties, such as businesses, vendors, government agencies, may make decision on how to do business with that user or how much to lend or sell them based on that trust score. For example, different threshold for the trust score may be established and the trust score must meet these thresholds (based on a comparison) before money will be lend, a credit card issued, or a product sold/given to the user, before an identification card will be issued, or before access is granted to a secure location.

As banks and other lending institutions report on outstanding balances, credit limits, and payment timeliness to the credit bureaus, it is envisaged that the bank could also

provide the biometric template (possibly in an encrypted format) to a credit bureau, government entity, or other entity, to store as part of the identifying information in the user's credit file. Then if the user desires to apply for credit from a different institution that institution can require that the user access their version of the application with the same biometric data collection system (and/or trust score) as was used to create and maintain the template. The biometric templates could be sent to the credit bureaus servers and be compared with the templates on file for that individual. With this process, the user can positively identify themselves and grant access to the financial institution to view their credit information without providing or transmitting their social security number, date of birth or other sensitive information.

If a user does not have a debt to pay to the account issuer or the issuer is not a financial institution, it is possible to simply offer a temporary escrow service (or other process to build trust) to provide the assurance that the biometric data provided is true and correct for the user being claimed. For example, a user can provide a credit card number with his/her name and address, the card could be billed $100 and the user would provide their biometric data to the app in their smart device. The user would then correctly answer a series of knowledge based authentication questions based on their credit report, insurance information, medical information or other potential confidential information, and provide their biometric data again to the app to retrieve the funds or match with a trusted database stored biometric or other means. The result is a biometric identity that can be trusted in future transactions up to the amount that was previously placed into escrow and successfully retrieved. In this manner, credit may be offered up to the escrow amount or some amounted based on the escrow account amount.

Although described in financial terms, it is also contemplated that other actions may be used to build trust that biometric information captured when the action occurs and the resulting trusted biometric profile developed over time is accurate and trusted. For example, in one embodiment, the authentication system may be used as a time-clock or access control system at a person's place of employment. Every time the user clocks into work or enters the building using the system for access control, their biometric information is captured and used to build trust in their identity. It is assumed that the person attending work is the actual person and not a person attempting to commit fraud or establish a false identity. Likewise, this process could occur at a doctors office as part of a medical exam, dentist office, for donation of money, when obtaining or renewing a driver license or passport, attending school, or any other activity that would not be performed by a person attempting to commit fraud. GPS data may be combined with this process to verify that a person clocking into work is at the work site.

Decentralized Biometric Identity Ledger

There are numerous security and privacy benefits to a decentralized, anonymous, biometric identity network as compared to biometric authentication conducted on a centralized database or solely on a user device. As previously explained, biometric identity information may comprise images having biometric data such as digital photographs of a face or a fingerprint, and/or biometric templates which are strings of numbers representing data that has been captured by a sensor and converted to a string by a biometric recognition algorithm.

Decentralized Ledgers such as Blockchains, Tangles, HashGraphs etc., referred to hereafter at Blockchains, can be used to create public or private records that provide an immutable transaction history. The blocks may store various data, and in this embodiment, the blocks may store biometric data in the form of an image or a biometric template created from a biometric sensor (camera, fingerprint scanner, etc.) and/or from an algorithm analyzing an output from the biometric sensor (photograph, fingerprint scan, etc.). FIG. **19** shows a system of biometric authentication using a blockchain, according to an exemplary embodiment.

In an exemplary biometric authentication method, a smart device **1912** would run an application allowing a sensor **1916** or camera **1914** to capture biometric data and optionally convert the biometric data to one or more biometric templates. That biometric data and/or template(s) would be added to an encrypted block along with additional information such as a device ID, a unique user ID, user identity information, the algorithm/sensor version/type info, date and time stamp, GPS information, and/or other data.

The block may be added to the blockchain **1940** where it is stored. If the user attempts to open the application again, or provides the public key or a unique user identifier that corresponds to the public key for the block into another application. Then the user is again presented with the biometric data capture interface through which the user again presents his/her biometric data to the sensor **1619** or camera **1914**. The captured biometric data may again optionally be converted to a biometric template on the device **1912**. Next, the user's previous block is requested from the blockchain **1940** and is downloaded to the smart device **1912** where a private key may be kept in the application to decrypt the block. The data and/or biometric template(s) from the block can now be compared to the recently captured biometric data and/or biometric template(s). If a match is found, then the user is authenticated and granted access to the application, can make a transaction, etc. and the successful decryption of the block and the matching of the templates can be recorded with any combination of the data, the transaction, original template, the most recently successfully matched template or both may be stored in the new block.

In addition to or as an alternative to the comparison and matching being done on the device **1912**, the comparison and matching may be completed on the blockchain ledger servers **1940**. In this instance, biometric data obtained at the user device **1912** and/or biometric template(s) generated at the user device **1912** from the biometric data is encrypted and sent to the blockchain ledger servers **1940**. Next, the public key and the private decryption key may be sent to the blockchain ledger servers **1940** to decrypt one or more previous blocks of the user's biometric information and/or template(s) as well as to decrypt the most recently sent biometric data and/or template(s). The blockchain ledger servers **1940** then run the matching algorithms to determine if the biometric information and/or template(s) stored in the block and the most recently collected biometric information and/or template(s) are deemed a match by the thresholds previously set in the matching algorithm. By providing template matching on all the blockchain ledger severs **1940** (which could be hundreds or thousands of servers), an account provider can be sure that the device **1912** running the application has not been compromised if the matching results are the same as on the blockchain ledger servers **1940**. The device **1912** and all of the blockchain ledger servers **1940** would have to be compromised at the same time for a hacker to change all of them, which of course would be highly unlikely if not impossible.

In yet another embodiment a dedicated "matching server" **1950** could be employed that would be sent a copy of both the recently collected biometric information and/or template(s) from the device and the biometric information

and/or template(s) in the block. The device **1912** may provide the decryption key directly to the matching server **1950**, or the blockchain **1940** could be instructed to send the encrypted biometric template(s) to the matching server with a "smart contract" which is a set of computer instructions coded into the block. This is a feature of blockchains with decentralized processing abilities like Ethereum.

It is also envisaged that when a new device requests a block using a user's unique ID, for example an email address, phone number, or a public key, that the device is only authorized to download blocks in the chain that contain biometric templates of the user that are associated with that unique ID because the device contains the private keys. So the user's most recent templates could be compared with all the templates that have been captured and are stored on the blockchain, allowing for multiple matches. This may provide fewer false rejections of the correct users that can result from changes in appearance due to lighting, aging, makeup, hair, beard, glasses, etc.

In one configuration of the system and method disclosed herein, there is a private key and the private key will decrypt the block contents, but the biometric data inside the block is what is used on the comparison to determine if there is a match between new biometric data and stored biometric data. Thus, the private key is required to gain access to the biometric data block. The private key may be created by the user, the system, or the private key could corresponded to a combination of unique identifiers that are is easier to remember, a phone number, a social security number, an email address and a date of birth, etc., and thus also unique to the user. In this configuration, it's possible and contemplated that there are two blockchains, one with the personal data in it, and one with anonymous storage of biometrics templates only, in it. The personal data blocks in the first blockchain would be decrypted by a private key or corresponding personal data combos that only you know, and you share it only with specific vendors that you want to be able to verify that identity, then in that data the block number of another block(s) with your biometric data is appended to that record and then the app can go unlock that block and match/update your newly uploaded biometric data to the data in that biometric block.

In addition to the biometric matching, the application collecting the biometric data may perform liveness tests on the biometric data collected, such as those described above. If the user is proven to exhibit traits that typically only exist in living humans, at the exact moment that the identity is verified then the biometric data can be trusted to be from a real human being, not a non-living object such as a photo or video spoof.

FIG. **20** is a schematic of a computing or mobile device, or server, such as one of the devices described above, according to one exemplary embodiment. FIG. **20** shows an example of a computing device **2070** and a mobile computing device **2050**, which may be used with the techniques described here. Computing device **2070** is intended to represent various forms of digital computers, such as laptops, desktops, workstations, personal digital assistants, servers, blade servers, mainframes, and other appropriate computers. Computing device **2050** is intended to represent various forms of mobile devices, such as personal digital assistants, cellular telephones, smart phones, and other similar computing devices. The components shown here, their connections and relationships, and their functions, are meant to be exemplary only, and are not meant to limit the implementations described and/or claimed in this document.

Computing device **2070** includes a processor **2002**, memory **2004**, a storage device **2006**, a high-speed interface or controller **2008** connecting to memory **2004** and high-speed expansion ports **2010**, and a low-speed interface or controller **2012** connecting to low-speed bus **2014** and storage device **2006**. Each of the components **2002**, **2004**, **2006**, **2008**, **2010**, and **2012**, are interconnected using various busses, and may be mounted on a common motherboard or in other manners as appropriate. The processor **2002** can process instructions for execution within the computing device **2070**, including instructions stored in the memory **2004** or on the storage device **2006** to display graphical information for a GUI on an external input/output device, such as display **2016** coupled to high-speed controller **2008**. In other implementations, multiple processors and/or multiple buses may be used, as appropriate, along with multiple memories and types of memory. Also, multiple computing devices **2070** may be connected, with each device providing portions of the necessary operations (e.g., as a server bank, a group of blade servers, or a multi-processor system).

The memory **2004** stores information within the computing device **2070**. In one implementation, the memory **2004** is a volatile memory unit or units. In another implementation, the memory **2004** is a non-volatile memory unit or units. The memory **2004** may also be another form of computer-readable medium, such as a magnetic or optical disk.

The storage device **2006** is capable of providing mass storage for the computing device **2070**. In one implementation, the storage device **2006** may be or contain a computer-readable medium, such as a hard disk device, an optical disk device, or a tape device, a flash memory or other similar solid-state memory device, or an array of devices, including devices in a storage area network or other configurations. A computer program product can be tangibly embodied in an information carrier. The computer program product may also contain instructions that, when executed, perform one or more methods, such as those described above. The information carrier is a computer- or machine-readable medium, such as the memory **2004**, the storage device **2006**, or memory on processor **2002**.

The high-speed controller **2008** manages bandwidth-intensive operations for the computing device **2070**, while the low-speed controller **2012** manages lower bandwidth-intensive operations. Such allocation of functions is exemplary only. In one implementation, the high-speed controller **2008** is coupled to memory **2004**, display **2016** (e.g., through a graphics processor or accelerator), and to high-speed expansion ports **2010**, which may accept various expansion cards (not shown). In the implementation, low-speed controller **2012** is coupled to storage device **2006** and low-speed bus **2014**. The low-speed bus **2014**, which may include various communication ports (e.g., USB, Bluetooth, Ethernet, wireless Ethernet) may be coupled to one or more input/output devices, such as a keyboard, a pointing device, a scanner, or a networking device such as a switch or router, e.g., through a network adapter.

The computing device **2070** may be implemented in a number of different forms, as shown in the figure. For example, it may be implemented as a standard server **2020**, or multiple times in a group of such servers. It may also be implemented as part of a rack server system **2024**. In addition, it may be implemented in a personal computer such as a laptop computer **2022**. Alternatively, components from computing device **2070** may be combined with other components in a mobile device (not shown), such as device **2050**. Each of such devices may contain one or more of

computing device **2070**, **2050**, and an entire system may be made up of multiple computing devices **2070**, **2050** communicating with each other.

Computing device **2050** includes a processor **2052**, memory **2064**, an input/output device such as a display **2054**, a communication interface **2066**, and a transceiver **2068**, among other components. The device **2050** may also be provided with a storage device, such as a microdrive or other device, to provide additional storage. Each of the components **2050**, **2052**, **2064**, **2054**, **2066**, and **2068**, are interconnected using various buses, and several of the components may be mounted on a common motherboard or in other manners as appropriate.

The processor **2052** can execute instructions within the computing device **2050**, including instructions stored in the memory **2064**. The processor may be implemented as a chipset of chips that include separate and multiple analog and digital processors. The processor may provide, for example, for coordination of the other components of the device **2050**, such as control of user interfaces, applications run by device **2050**, and wireless communication by device **2050**.

Processor **2052** may communicate with a user through control interface **2058** and display interface **2056** coupled to a display **2054**. The display **2054** may be, for example, a TFT LCD (Thin-Film-Transistor Liquid Crystal Display) or an OLED (Organic Light Emitting Diode) display, or other appropriate display technology. The display interface **2056** may comprise appropriate circuitry for driving the display **2054** to present graphical and other information to a user. The control interface **2058** may receive commands from a user and convert them for submission to the processor **2052**. In addition, an external interface **2062** may be provide in communication with processor **2052**, so as to enable near area communication of device **2050** with other devices. External interface **2062** may provide, for example, for wired communication in some implementations, or for wireless communication in other implementations, and multiple interfaces may also be used.

The memory **2064** stores information within the computing device **2050**. The memory **2064** can be implemented as one or more of a computer-readable medium or media, a volatile memory unit or units, or a non-volatile memory unit or units. Expansion memory **2074** may also be provided and connected to device **2050** through expansion interface **2072**, which may include, for example, a SIMM (Single In Line Memory Module) card interface. Such expansion memory **2074** may provide extra storage space for device **2050**, or may also store applications or other information for device **2050**. Specifically, expansion memory **2074** may include instructions to carry out or supplement the processes described above, and may include secure information also. Thus, for example, expansion memory **2074** may be provide as a security module for device **2050**, and may be programmed with instructions that permit secure use of device **2050**. In addition, secure applications may be provided via the SIMM cards, along with additional information, such as placing identifying information on the SIMM card in a non-hackable manner.

The memory may include, for example, flash memory and/or NVRAM memory, as discussed below. In one implementation, a computer program product is tangibly embodied in an information carrier. The computer program product contains instructions that, when executed, perform one or more methods, such as those described above. The information carrier is a computer- or machine-readable medium, such as the memory **2064**, expansion memory **2074**, or memory on processor **2052**, that may be received, for example, over transceiver **2068** or external interface **2062**.

Device **2050** may communicate wirelessly through communication interface **2066**, which may include digital signal processing circuitry where necessary. Communication interface **2066** may provide for communications under various modes or protocols, such as GSM voice calls, SMS, EMS, or MMS messaging, CDMA, TDMA, PDC, WCDMA, CDMA2000, or GPRS, among others. Such communication may occur, for example, through radio-frequency transceiver **2068**. In addition, short-range communication may occur, such as using a Bluetooth, Wifi, or other such transceiver (not shown). In addition, GPS (Global Positioning system) receiver module **2070** may provide additional navigation- and location-related wireless data to device **2050**, which may be used as appropriate by applications running on device **2050**.

Device **2050** may also communicate audibly using audio codec **2060**, which may receive spoken information from a user and convert it to usable digital information. Audio codec **2060** may likewise generate audible sound for a user, such as through a speaker, e.g., in a handset of device **2050**. Such sound may include sound from voice telephone calls, may include recorded sound (e.g., voice messages, music files, etc.) and may also include sound generated by applications operating on device **2050**.

The computing device **2050** may be implemented in a number of different forms, as shown in the figure. For example, it may be implemented as a cellular telephone **2080**. It may also be implemented as part of a smart phone **2082**, personal digital assistant, a computer tablet, or other similar mobile device.

Thus, various implementations of the systems and techniques described here can be realized in digital electronic circuitry, integrated circuitry, specially designed ASICs (application specific integrated circuits), computer hardware, firmware, software, and/or combinations thereof. These various implementations can include implementation in one or more computer programs that are executable and/or interpretable on a programmable system including at least one programmable processor, which may be special or general purpose, coupled to receive data and instructions from, and to transmit data and instructions to, a storage system, at least one input device, and at least one output device.

These computer programs (also known as programs, software, software applications or code) include machine instructions for a programmable processor, and can be implemented in a high-level procedural and/or object-oriented programming language, and/or in assembly/machine language. As used herein, the terms "machine-readable medium" "computer-readable medium" refers to any computer program product, apparatus and/or device (e.g., magnetic discs, optical disks, memory, Programmable Logic Devices (PLDs)) used to provide machine instructions and/or data to a programmable processor, including a machine-readable medium that receives machine instructions as a machine-readable signal. The term "machine-readable signal" refers to any signal used to provide machine instructions and/or data to a programmable processor.

To provide for interaction with a user, the systems and techniques described here can be implemented on a computer having a display device (e.g., a CRT (cathode ray tube) or LCD (liquid crystal display) monitor) for displaying information to the user and a keyboard and a pointing device (e.g., a mouse or a trackball) by which the user can provide input to the computer. Other kinds of devices can be used to

provide for interaction with a user as well; for example, feedback provided to the user can be any form of sensory feedback (e.g., visual feedback, auditory feedback, or tactile feedback); and input from the user can be received in any form, including acoustic, speech, or tactile input.

The systems and techniques described here can be implemented in a computing system (e.g., computing device **2070** and/or **2050**) that includes a back end component (e.g., as a data server), or that includes a middleware component (e.g., an application server), or that includes a front end component (e.g., a client computer having a graphical user interface or a Web browser through which a user can interact with an implementation of the systems and techniques described here), or any combination of such back end, middleware, or front end components. The components of the system can be interconnected by any form or medium of digital data communication (e.g., a communication network). Examples of communication networks include a local area network ("LAN"), a wide area network ("WAN"), and the Internet.

The computing system can include clients and servers. A client and server are generally remote from each other and typically interact through a communication network. The relationship of client and server arises by virtue of computer programs running on the respective computers and having a client-server relationship to each other.

Also disclosed herein is a method and system for dynamically monitoring illumination of the user's face and adjusting the brightness of a display screen or other light source to control and balance the illumination or brightness level of the user's face. As discussed above, a camera captures one or more images of a user's face. Processing occurs on the one or more images to detect either liveness and/or three-dimensionality of the user, facial or identity recognition, or both. Adequate and balanced illumination of the user's face results in the captured images being suitable for accurate processing, thereby resulting in effective processing, faster processing, and more accurate liveness and three-dimensionality of the user, facial or identity recognition, or both. The system checks for liveness of the user and three-dimensionality.

FIG. **21** illustrates an example environment of use. This environment is in a room **2104** or other area. In the room may be a window **2108** which allows in a large amount of light while the opposite side of the room may be void of any illumination elements, such as lights or windows. A user **2112** is positioned facing and in front of a screen **2116** that has a camera **2120**, such as a web cam, or any other type of camera. The monitor **2116** and camera may connect to a computer **2124** or any other processing device. The camera **2120** capture an image of the user's face and displays the face on the monitor **2126** as a displayed facial image **2140**.

In this example environment the face illuminates the left hand side (LHS) **2130** of the user's face while the right hand side (RHS) **2134** of the user's face is less illuminated or dark. The image recorded by the camera **2120** captures this unbalanced illumination. As is understood by one of ordinary skill in the art cameras have a limited contrast differential across which the entire image can be captured without having areas which are too dark or too bright. Stated another way, an image capture device, such as a CCD, captures light energy and the amount of light energy captured determines the brightness of that portion of the image. If one portion of the scene is very bright, while another portion very dark, then the image capture device can not accurately capture detail in both portions of the frame. The dark portions may be black, with no detail, or the bright portions will be blown out and all white.

For some phone, it is unlikely both the light and dark areas would be lack detail because the camera usually user chooses the location of "focus" and then the camera adjusts exposure levels have detail in that area, or the camera uses whichever part has the most area to establish exposure. For example, if the face is small and the background is dark the camera will optimize for the larger area (dark background) but if the face is larger in area than the background (like in the zoomed position closer to the user) the camera optimizes exposure for the lighter face. This means that in many cases the camera must adjust during the zoom motion (movement toward or away from the user's face) and that is hard for some low-end phones to do quickly. So by dimming the screen the systems reduce the need for the camera to compensate as much, thus improving operation for all mobile devices and particularly for low-end mobile devices.

If such an image is presented for processing for displayed facial image **2140** liveness and/or three-dimensionality of the user, facial or identity recognition, or both, the processing may fail or lack accuracy. To overcome this drawback, proposed is a system which dynamically monitors the facial illumination and balance, and responsive thereto, dynamically controls the brightness of the entire screen or portions of the screen. In this example environment, because the LHS **2130** of the user's face is highly illuminated, the brightness level of the LHS of the screen **2150** is unchanged or dimmed. Concurrently, the RHS **2134** of the user's face is poorly illuminated and in the shadow, the brightness level of the RHS of the screen **2154** is unchanged or dimmed. This results in the RHS **2134** of the user face receiving more illumination from the RHS **2154** of the screen due to the light from the screen striking the RHS **2134** of the user's face being. The illumination of the LHS of the user face **2130** is typically unchanged because the majority of its illumination is from the window.

Although shown in a room, the same problem can outside or in a vehicle. In both instances, portions of the user's face may not be equally illuminated, thereby yielding facial images which have portions which are too dark and too bright for capture of an image which is suitable for processing. For example, this can occur in a vehicle where the side of the user's face adjacent the window to much brighter than the side of the user's face that is opposite or not near the window. The mobile device may be a mobile phone, tablet, laptop, or an in-car camera. The location may be in the car, building, or outside. The user may also be in a room which has high contrast between different areas or wearing a hat. Similarly, the user may be near a lamp, reflection, or any other source of light or cause of dimness that may cause an imbalance of light on the user's face, which will cause a captured image to be imbalanced.

Over time, the illumination balance on the face of the user may change in real time. For example, a cloud may pass by or a lamp or light fixture may be turned on or off. There are numerous actions or events that will change the illumination on a user face. The system and method disclosed herein is configured to react to the change in real time to dynamically adjust the screen brightness, on the one or more portions of the screen, to balance the illumination of the user's face.

Although discussed above in relation to the right hand side and left hand side of the user's face having unbalanced illumination, it is also contemplated the any portion of the user's face may have unbalanced illumination as compared to the rest of the user's face.

FIG. **22**A illustrates on example of the dynamic adjustment of portion of the screen based on a sensed brightness of the captured image of the user's face. In this example a

screen **2204** opposes a user's face **2208**. A light source **2212** illuminates the faces left hand side (LHS) **2208** causing the face's LHS to be highly illuminated as compared to the face's right hand side (RHS) **2224**. The camera captures images of the user's face and this illumination differential is detected in the image by a processor executing software. The processor and executed software generates control signals to adjust the screen's brightness level. As a result, a screen's RHS **2234** is controlled to increase brightness while leaving a screen's LHS **2230** unchanged or dimmed. This compensates for the illumination differential.

FIG. **22**B illustrates on example of the dynamic adjustment of portion of the screen based on a sensed brightness of the captured image of the user's face. In this example a screen **2204** opposes a user's face **2208**. A light source **2240** illuminates the face's right hand side (RHS) **2208** causing the face's RHS to be highly illuminated as compared to the face's left hand side (LHS) **2224**. The camera captures images of the user's face and this illumination differential is detected in the image by a processor executing software. The processor and executed software generates control signals to adjust the screen's brightness level. As a result, a screen's LHS **2234** is controlled to increase brightness while leaving a screen's RHS **2230** unchanged or dimmed. This compensates for the illumination differential. These changes may occur in real time.

It is contemplated and disclosed that the amount of screen brightness adjustment is variable. Statement simply, the screen's brightness level may be increased slightly, to it's maximum brightness, or any degree therebetween. This provides accurate illumination balancing to thereby insuring that the captured images are ideal for post capture processing.

FIG. **23** illustrates an exemplary system for dynamic screen brightness. As shown a screen **2304** is provided with a camera **2308**. The camera **2308** is configured to capture a face of a user **2320**. The screen **2304** and camera **2308** connect to a computer or processor **2312**. The computer or processor may be similar to or the same as that shown in FIG. **20**. As a result, the computer or processor **2312** is not described in detail. A user interface **2316** connects to or communicates with the computer or processor **2312**. Although shown as being used with a desktop computer **2124** and desk monitor **2116** it is also contemplated and disclosed that the computing device may be a laptop, tablet, or mobile computing device such as a smartphone or any other type screen and computing device combination.

The system of FIG. **23** generates a real time feedback loop. The camera generates an image which is provided to the computer or processor **2312**. The computer or processor **2312** executed software code which detects and locates the face within the image and determines if the brightness levels are within a predetermined desired range and whether the brightness difference across the face are to large or outside a threshold. Based on the detected brightness levels and the location of the brightness differences the screen is controlled to be brighter in certain areas to compensate for the brightness differential by adding more illumination to the area of the face with are detected to be dark.

It is contemplated that the any portion of the screen may be controlled to have brightness levels which are increased, decreased, or held the same. By way of example and not limitation, the adjusted screen areas include the sides, the upper portion, lower portion, upper right quadrant, lower right quadrant, upper left quadrant, lower left quadrant, center area, outer edge areas, or any other portion of the screen or combination of these areas.

FIG. **24** is an operational flow diagram of an exemplary method of operation. This is but one possible method of operation and as such one of ordinary skill in the art may arrive at different alternative methods of operation. In this example embodiment, at a step **2404** a session is initiated. The session could be any type session that captures facial images and for which uniform lighting and lighting of an intensity range is required or preferred. In one embodiment the session is an authentication session such as, a liveness verification session, a facial recognition session or both. The term authentication session as used herein is defined to mean verifying liveness and/or three dimensionality of user (verifying the user is a real liver person), verifying the identity of the user, or both. Next, at a step **2408** the system receives an image of the user's face from the camera. Although described in connection with the face, it is contemplated that this innovation may find use for balancing illumination of any capture element when a screen is available to dynamically adjust light out for illuminating the item being imaged.

At a step **2412** the image is provided to the computer, which has a processor executing machine readable code that is stored in a non-transitory state on a memory. The code analyzes the image data to detect the user's face or portions of the user's face.

Next, at a step **2416** the software processes the image data to detect brightness levels on the user face. In one embodiment the detecting determines over all illumination of the face and illumination balance across the face. Illumination balance is a measure of if the face is uniform brightness or if one portion of the face is too dark, other portion is too bright, or both, which may hinder subsequent image processing.

Next, at a decision step **2420** the system determines if the any illumination level of the facial portion of the image is out of range. This determines if the image is too dark or too bright for subsequent optimal processing and the overall or average brightness of the face in the image is in range, or if one section of the face is too bright or too dark as compared to other areas of the face. If at step **2420** any of the overall illumination levels are not out of range, then the operation advances to step **2424** and the screen brightness is maintained. Then at a step **2228** the operation advances to step **2408** and the operation continues.

Alternatively, if at step **2420** it is determined that the average brightness of the face in the image is too bright or too dark. If, at step **2432**, the average brightness of the face in the facial image is too bright or too dark, then the operation advances to step **2436** and the screen brightness is dynamically adjusted to increase or decrease the brightness of the entire screen to thereby adjust the overall brightness or darkness of the user's face as captured in the image. The light from the screen projects outward from the screen and strikes the face of the user.

At a decision step **2432** it is determined that the brightness is not outside of the desired range of brightness that is suitable for subsequent processing, then the operation advances to step **2444**. At step **2444** the system determines the areas of the brightness differential, such as by determining the areas of the face that are too bright or too dark or which have too great a differential comparing the brightest areas of the face to the darkest areas of the face. This step also compares portions of the face to threshold levels from brightness, darkness, or both to determine if a portion of the face is not illuminated properly for ideal subsequent processing.

Then, at a step **2448** screens area are calculated which corresponded to area of the face which are determined to be

too bright or too dark in the received image. In one embodiment, this calculation determines areas of the screen which oppose or are opposite the areas of the face which are to bright or too dark. As shown in the earlier figures, if the right side of the face is too dark, then this step determines that the right side of the screen (from the perspective of looking at the screen) opposes the right side of the face.

Next, at a step **2452** system dynamically increases brightness levels of portions of the screen which oppose the portions of the face which were determined to be too dark, to thereby provide additional illumination to that portion of the face. Similarly, at as step **2456**, the system dynamically decreases brightness levels of the portions of the screen which oppose the portions of the face which were determined to be too bright or have too much illumination, to thereby reduce illumination to that portion of the face. It is contemplated that any portion of the screen may have its brightness levels adjusted. It is also contemplated that a portion of the screen may have its brightness level increased without having any portion made dimmer. Likewise, in some instances a portion of the screen may have its brightness level decreased without having any portion made brighter. In other situation, portions of the screen may be made brighter while portions are made dimmer.

This process occurs dynamically such that as the illumination of the user's face changes, the screen brightness and which portions are adjusted changes in real time to react to the real time changes in facial illumination. These real time changes may occur based on the changing environment that changes the light on the user face, or due to change in facial illumination which occur due to movement of the camera relative to the user's face or movement of the user's face relative to the camera. For example, in the case of a computer web cam, often placed above or on the monitor (screen) the user will move closer to the camera as port of the authentication, liveness or facial recognition process. The change in distance between the user and the camera may change the illumination on the user's face, such as by shadowing, light blocking, or any other factor. When the screen (and camera) is moved closer to the user's face, the face covers a larger portion of the screen and if the user is light skinned then more light comes from the screen and the user is closer to the light source (screen) so exponentially more light is on the user's face, which creates that illumination feedback loop. If the user is dark skinned, different parameters may apply. It is also contemplated that a light or flash located on the front of the mobile device may be controlled to adjust facial illumination. The disclosed system adjusts the screen brightness as the distance between the user and the camera changes to dynamically maintain the illumination levels on the user's face during the capture of multiple images or video of the user's face. It is understood that video capture is the capture of multiple sequential images. Thereafter, the operation advances to step **2460** and returns to step **2408** and the process repeats.

Also disclosed herein is a method and system to account for non-use of the system over a period of time, which may be many months or years. Over the prior of non-use, the user's appearance may have changed as compared to the last time they used the system. Due to the non-use, the user is not accessing their authentication account through use of the system and, as a result, is not gaining the benefit of the continuous learning feature of the system. This leads to the facemap of the user not adapting to the user's change in appearance over time. Consequently, the user may not match highly enough when compared to the re-enrolled facemap (prior data) to authenticate the user due to the user's change in appearance over time. This can be problematic when the user does not often access their account by authenticating or use the authentication system for access. One example of when this may occur is when the system is used to account recovery after a long period non-use. This can occur when a bank account or credit card account is not used for long period of time and when the user returns to access the account their appearance has changed.

To over come this drawback in the prior art, it is contemplated to relax or lower the required thresholds used to match the user during the authentication process that determine if an authentication match has occurred. For example, if a 99.999% match is typically required for authentication for a frequent user of the authentication system, then the threshold may be lower to a 99.995% match if the authentication system has not been used for a year. This is based on the expectation that a user that authenticated recently, such as yesterday or last week, should look very much the same during the next authentication. However, it is understandable that a user who has not authentication for a year will have a changed appearance somewhat, and hence, a lower authentication threshold is appropriate to avoid false rejections. This could also be supplemented by increasing the importance or weight of specific algorithms (facial analysis techniques) that are known to be more robust to user changes resulting from aging and reducing the influence or weight on algorithms that have been determined to be more sensitive to aging to prevent false rejections.

In one embodiment, the threshold is lower based on the time period from the last authentication, such that the threshold is lowered as the time period from the last authentication session increases. This may occur automatically based on an algorithm. The algorithm may take into account the persons age, or other factors. As to age, period may change more during certain times of their life than at the times. For example, when the age of the user is from 30 to 35, the user's appearance may change very little, while the user appearance may change more dramatically from 18 years old to 25 years old. In another embodiment, facial features which are detected may cause the threshold to be relaxed (lowered). For example, if the authentication system detects a beard, glasses, make-up, wrinkles or some other appearance changing feature of the user, then the threshold detection may be lowered to account for the change that occurred over a long period of time. Thus, the threshold may be adjusted based on the amount of time that has passed since the last authentication. For example, if six months have passed since the last successful authentication session, then the threshold may be relaxed (lowered) by a first amount. If twelve months has passed since the last successful authentication session, then the threshold may be relaxed (lowered) by a second amount, which is more than the first amount. If authentication has not occurred for 18 months, then the thresholds may be relaxed (lowered) by a third amount, which is more than the second amount. The numeric time periods are for exemplary purposes only. It is also contemplated that passage of time since the last successful authentication may require a second authentication factor, which may be any authentication factor discussed herein, such as authentication from a trusted device, authentication triggered from a link being sent to a mobile #or email, prior password, prior address, security question, location question, knowledge based questions to enhance the probability that the user is indeed the correct user and not a similar looking imposter. All this may optionally occur with live-

ness verification to verify not only that the user matches previously stored user data but also that the user is three-dimensional and live.

In one embodiment, certain traits or facial areas, which are know to change with time, are associated with relaxed or lowed threshold, while other threshold associated with traits that do not change with age are not relaxed or lowered. Traits that change with age may include but are not limited to hair color, double chin, wrinkles, hair line, bag under eyes, moles, scars, facial hair, sun burns, tans, or any other feature or trait that changes over time.

It is also contemplated that the user may, in the case of a long time period or even a short time period between the current authentication and the prior authentication be presented with the option to enter information about their appearance that may have changed. For example, if the any of the following change the appearance of the user then the user may provide this information to the authentication system: facial hair/beard, glasses, cosmetic surgery, change in tan, contacts, make up, sunburn, dental braces, dental work, bruising, allergies, facial swelling, or any other feature that may change to appearance of the user.

It is further contemplated that the time of year the user performed their last authentication be taken into account in the authentication algorithms. For example, if the user last authenticated in the winter, then that user is more likely to be lighter skinned than if that last authentication occurred in the summer due to likely tanning in the summer. As a result, the system can compensate for that change dues to the seasons during the authentication process.

While various embodiments of the invention have been described, it will be apparent to those of ordinary skill in the art that many more embodiments and implementations are possible that are within the scope of this invention. In addition, the various features, elements, and embodiments described herein may be claimed or combined in any combination or arrangement.

What is claimed is:

1. A method for authenticating a user with a computing device, the computing device having an associated camera and display screen, comprising:

capturing one or more images of a user's face with a camera associated with the computing device;

processing the at least one of the one or more images to evaluate an illumination level of a first portion of the user's face and an illumination level of a second portion of the user's face in the one or more images;

responsive to an illumination level of the first portion or second portion of the user's face being below a threshold illumination level, determining a first portion of a screen which opposes the first portion of the user's face and a second portion of the screen which opposes the second portion of the user's face;

responsive to the first portion of the user's face having an illumination level below the threshold illumination level, increasing the brightness of the first portion of the screen;

responsive to the second portion of the user's face having an illumination level below the threshold illumination level, increasing the brightness of the second portion of the screen; and

capturing a first image of the user's face and capturing a second image of the user's face and responsive to an illumination level of the first portion or second portion of the user's face being within a threshold illumination level, comparing the first image to the second image to evaluate differences between the first image and the second image to verify that the one or more images were captured from a three-dimensional face.

2. The method of claim **1** wherein the authentication further comprises liveness analysis.

3. The method of claim **1** wherein the authentication further comprises identity verification.

4. The method of claim **1** further comprising

comparing the first image, the second image, or both to a previously captured and stored image to verify identity of the user.

5. The method of claim **1** wherein capturing the second image occurs with a second distance between the user's face and the camera, and capturing the first image occur with a first distance between the user's face the camera, such that the second distance is different than the first distance.

6. The method of claim **1** further comprising detecting portions of the user's face, in the one or more images, which are at an illumination level that is greater than a maximum illumination level and decreasing screen brightness at portions of the screen which oppose the portions of the user's face which are at an illumination level that is greater than a maximum illumination level.

7. The method of claim **1** further comprising balancing the illumination of the user's face by also reducing brightness of a portion of the screen that did not have its brightness level increased.

8. A system for dynamically balancing illumination of a user's face during an authentication session:

a computing device that includes a screen, a camera, a processor, and a memory, the memory configured with non-transitory processor executable code capable of being executed by the processor, the processor executable code configured to:

capturing one or more images of the user's face with the camera during an authentication session, wherein the authentication session comprises one or more of the following: identity analysis, facial three-dimensionality analysis, and liveness analysis;

analyzing brightness levels of the user's face in the one or more images in relation to a brightness differential, wherein the analyzing comprises calculating a brightness differential between a bright area of the user's face and a dark area of the user's face in one or more images;

responsive to the brightness levels of the user's face in the one or more images exceeding the brightness differential, controlling screen brightness to establish the brightness levels of the user's face to be within the one or more thresholds by increasing brightness of one or more portions of a screen that oppose the dark areas of the user's face;

continuing to monitor the brightness levels of the user's face during the authentication session and dynamically adjusting screen brightness to maintain the brightness levels of the user's face in the images to be within the one or more thresholds.

9. The system of claim **8**, wherein the processor executable code is further configured to decrease brightness of one or more portions of the screen that oppose bright areas of the user's face.

10. The system of claim **8** wherein the one or more thresholds include maximum brightness threshold, minimum brightness threshold, and brightness differential threshold.

11. The system of claim **8** wherein the authentication session comprises capturing at least one image at a first distance between the user's face and the camera and cap-

turing at least one image at a second distance between the user's face and the camera, the first distance different than the second distance.

12. The system of claim **11** wherein the authentication session includes comparing the at least one image captured at a first distance to the at least one image captured at a second distance for expected differences and only authenticating when the expected differences resulting, from the change in distance, are present in the comparison.

13. The system of claim **8** wherein dynamically adjusting screen brightness to not exceed the brightness differential of the user's face in the images comprises adjusting a portion of the screen brighter while leaving a portion of the screen unchanged.

14. A method for balancing illumination of a user's face during an authentication session comprising:

capturing images of a user's face with a computing device, the computing device having a camera, screen, a processor, and memory, the memory configured with non-transitory machine executable code executable by the processor;

monitoring the brightness levels of the user's face in at least one of the images to determine if one or more portions of user's face have brightness levels that are outside of a range of brightness levels suitable for authentication processing, wherein the brightness levels suitable for authentication processing include a brightness differential between the bright areas of the user's face and dark areas of the user's face; and

responsive to the monitoring determining that one or more portions of the user's face have brightness levels that are outside of the range of brightness levels suitable for authentication processing, dynamically increasing or decreasing brightness of one or more screen areas to establish the brightness levels of the user's face within the range of brightness levels suitable for authentication processing wherein the authentication processing comprises liveness analysis.

15. The method of claim **14** wherein dynamically increasing or decreasing brightness of one or more screen areas comprises increasing brightness of screen areas which oppose areas of the user's face which have brightness levels which are below the range of brightness levels suitable for authentication processing.

16. The method of claim **15** wherein dynamically increasing or decreasing brightness of one or more screen areas comprises decreasing brightness of screen areas which oppose areas of the user's face which have brightness levels which are above the range of brightness levels suitable for authentication processing.

17. The method of claim **14** wherein the monitoring and dynamically increasing or decreasing brightness of one or more screen areas occurs in real time during the authentication session to adjust to changes in illumination of the user's face.

18. The method of claim **14** wherein the authentication session includes capturing a first image with the camera separated from the user's face by a first distance and capturing a second image with the camera separated from the user's face by a second distance, the second distance being different than the first distance, and adjusting screen brightness during capture of the first image and the second image to maintain facial illumination within a range which causes the user's face in the first image and the second image to be at a brightness level that is within a predetermined range of brightness levels which are suitable for authentication processing.

* * * * *