

US007796998B1

(12) **United States Patent**
Zellner et al.

(10) **Patent No.:** **US 7,796,998 B1**
(45) **Date of Patent:** **Sep. 14, 2010**

(54) **METHOD AND SYSTEM FOR DELIVERY OF
A CALLING PARTY'S LOCATION**

(75) Inventors: **Samuel N. Zellner**, Dunwoody, GA
(US); **Robert T. Moton, Jr.**, Alpharetta,
GA (US); **Mark J. Enzmann**, Roswell,
GA (US)

(73) Assignee: **AT&T Intellectual Property, I, L.P.**,
Reno, NV (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 64 days.

(21) Appl. No.: **09/630,134**

(22) Filed: **Aug. 1, 2000**

(51) **Int. Cl.**
H04W 24/00 (2009.01)

(52) **U.S. Cl.** **455/456.1**; 455/404.1; 455/457;
455/433; 455/414.1; 455/415; 379/45; 379/201.08;
370/352; 370/401

(58) **Field of Classification Search** 455/457,
455/415, 461, 566, 456.1-3, 414.1-2, 404,
455/404.1, 433; 379/207.15, 37, 43, 45,
379/201.08 11, 142.1, 142.06, 201.11, 88.21;
370/351-356, 401, 338; 709/203-206
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,445,118	A	4/1984	Taylor et al.
4,757,267	A *	7/1988	Riskin 379/114.24
5,303,393	A	4/1994	Noreen et al. 455/3.2
5,444,444	A	8/1995	Ross 340/994
5,511,111	A *	4/1996	Serbetcioglu et al. 379/88.01
5,512,908	A	4/1996	Herrick 342/387
5,528,248	A	6/1996	Steiner et al.
5,566,235	A *	10/1996	Hetz 379/221.02

5,588,042	A	12/1996	Comer 379/59
5,596,625	A *	1/1997	LeBlanc 455/404
5,610,973	A	3/1997	Comer 379/59
5,625,364	A	4/1997	Herrick et al. 342/449
5,657,375	A *	8/1997	Connolly et al. 455/436
5,663,734	A	9/1997	Krasner
5,694,453	A *	12/1997	Fuller et al. 340/825.49

(Continued)

FOREIGN PATENT DOCUMENTS

EP 000964542 A2 12/1999 705/14 X

(Continued)

OTHER PUBLICATIONS

PCT International Search Report, PCT/US01/22295.

(Continued)


Primary Examiner—Sharad Rampuria

(74) *Attorney, Agent, or Firm*—Cantor Colburn LLP

(57) **ABSTRACT**

A method and system for providing a service that delivers location information associated with a caller. The service operates in both wireline and wireless networks, providing called parties with the location information of calling parties who use either stationary terminal devices or mobile devices. The service can operate as a stand alone service or can be a part of a calling name delivery service (or caller-ID service), delivering location information in addition to the conventional name, number, date, and time. The primary components of the present invention include a service control point, an address database in communication with the service control point, and a network that tracks the locations of mobile network users. The system further includes a mapping converter if the location data provided by the network is not meaningful to a subscriber.

24 Claims, 6 Drawing Sheets

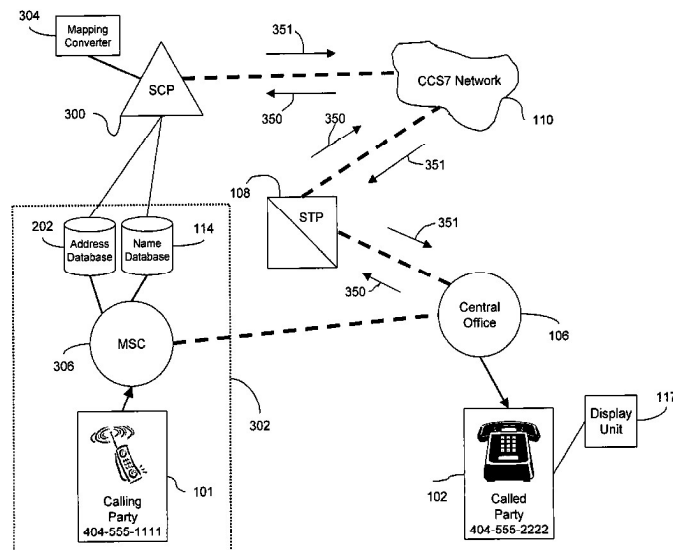

US 7,796,998 B1

Page 2

U.S. PATENT DOCUMENTS

5,701,301 A 12/1997 Weissner, Jr.
 5,712,899 A 1/1998 Pace, II 379/58
 5,727,057 A * 3/1998 Emery et al. 379/201.07
 5,771,283 A * 6/1998 Chang et al. 379/142.01
 5,794,210 A 8/1998 Goldhaber et al. 705/14
 5,819,155 A 10/1998 Worthing et al. 455/2
 5,838,774 A 11/1998 Weissner, Jr.
 5,852,775 A 12/1998 Hidary
 5,875,401 A 2/1999 Rochkind 455/466
 5,903,636 A * 5/1999 Malik 379/142.01
 5,949,867 A * 9/1999 Sonnenberg 379/211.02
 5,961,593 A 10/1999 Gabber et al.
 6,011,975 A * 1/2000 Emery et al. 455/456.1
 6,028,921 A * 2/2000 Malik et al. 379/201.04
 6,047,327 A 4/2000 Tso et al. 709/232
 6,085,086 A 7/2000 La Porta et al. 455/432
 6,091,956 A 7/2000 Hollenberg 455/456.5
 6,101,381 A 8/2000 Tajima et al.
 6,112,186 A 8/2000 Bergh et al. 705/10
 6,122,520 A 9/2000 Want et al. 455/456.2
 6,133,853 A 10/2000 Obradovich et al. 340/905
 6,138,003 A 10/2000 Kingdon et al.
 6,157,829 A 12/2000 Grube et al.
 6,184,829 B1 2/2001 Stulp 342/387
 6,185,426 B1 * 2/2001 Alperovich et al. 455/456
 6,208,854 B1 * 3/2001 Roberts et al. 455/417
 6,208,866 B1 3/2001 Rouhollahzadeh et al. 455/456.5
 6,229,477 B1 5/2001 Chang et al.
 6,233,329 B1 * 5/2001 Urban et al. 379/142.1
 6,259,405 B1 7/2001 Stewart et al. 342/457
 6,311,069 B1 10/2001 Havinis et al.
 6,317,718 B1 11/2001 Fano 705/1
 6,321,092 B1 11/2001 Fitch et al. 455/456.5
 6,324,396 B1 * 11/2001 Vasa et al. 455/415
 6,332,127 B1 12/2001 Bandera et al. 705/14
 6,353,664 B1 * 3/2002 Cannon et al. 379/142.1
 6,377,810 B1 4/2002 Geiger et al. 455/456.2
 6,385,591 B1 5/2002 Mankoff 705/14
 6,414,635 B1 7/2002 Stewart et al.
 6,418,308 B1 * 7/2002 Heinonen et al. 455/414.3
 6,421,441 B1 * 7/2002 Dzuban 379/221.09
 6,427,073 B1 7/2002 Kortessalmi et al. 455/414.1
 6,442,391 B1 8/2002 Johansson et al. 455/456
 6,442,687 B1 8/2002 Savage 713/156
 6,449,497 B1 9/2002 Kirbas et al.
 6,463,533 B1 10/2002 Calamera et al. 713/163
 6,470,378 B1 10/2002 Tracton et al. 709/203
 6,470,447 B1 10/2002 Lambert et al.
 6,473,626 B1 * 10/2002 Nevoux et al. 455/560
 6,477,382 B1 11/2002 Mansfield et al. 455/458
 6,484,148 B1 11/2002 Boyd
 6,496,931 B1 12/2002 Rajchel et al. 713/168
 6,505,046 B1 * 1/2003 Baker 455/456.3
 6,505,048 B1 1/2003 Moles et al. 455/456.1
 6,505,049 B1 * 1/2003 Dorenbosch 455/456
 6,505,163 B1 * 1/2003 Zhang et al. 704/275
 6,522,876 B1 2/2003 Weiland et al. 455/414.1
 6,526,275 B1 2/2003 Calvert 455/418
 6,545,596 B1 4/2003 Moon 340/425.5
 6,546,257 B1 4/2003 Stewart 455/456.3
 6,560,442 B1 5/2003 Yost et al. 455/67.1
 6,560,461 B1 5/2003 Fomukong et al. 455/456
 6,590,885 B1 * 7/2003 Jorgensen 370/338
 6,594,482 B1 7/2003 Findikli et al. 455/411
 6,614,781 B1 * 9/2003 Elliott et al. 370/352
 6,618,474 B1 9/2003 Reese 379/142.17
 6,618,593 B1 * 9/2003 Drutman et al. 455/456.3
 6,622,016 B1 * 9/2003 Sladek et al. 455/414.1
 6,628,928 B1 9/2003 Crosby et al. 455/77
 6,628,938 B1 9/2003 Rachabathuni et al. 455/414

6,640,184 B1 10/2003 Rabe
 6,647,257 B2 11/2003 Owensby 455/414.1
 6,647,269 B2 11/2003 Hendrey et al. 455/456
 6,650,901 B1 * 11/2003 Schuster et al. 455/456.1
 6,662,014 B1 * 12/2003 Walsh 455/456.2
 6,675,017 B1 1/2004 Zellner et al. 379/142.02
 6,677,894 B2 1/2004 Sheynblat et al.
 6,701,160 B1 3/2004 Pinder et al. 455/550.1
 6,716,101 B1 4/2004 Meadows et al. 455/456.1
 6,732,101 B1 5/2004 Cook 707/10
 6,738,808 B1 5/2004 Enzmann et al. 709/223
 6,754,504 B1 6/2004 Reed
 6,779,020 B1 * 8/2004 Henrick 709/206
 6,799,049 B1 9/2004 Zellner et al.
 6,819,929 B2 * 11/2004 Antonucci et al. 455/445
 6,829,475 B1 12/2004 Lee et al.
 6,850,758 B1 * 2/2005 Paul et al. 455/422.1
 6,867,733 B2 3/2005 Sandhu et al.
 6,868,074 B1 * 3/2005 Hanson 370/328
 6,874,011 B1 3/2005 Spielman 709/206
 6,876,858 B1 4/2005 Duvall et al.
 6,937,869 B1 * 8/2005 Rayburn 455/457
 6,940,950 B2 * 9/2005 Dickinson et al. 379/45
 6,954,147 B1 * 10/2005 Cromer et al. 340/568.1
 6,996,211 B2 * 2/2006 Reynolds et al. 379/88.21
 7,005,985 B1 2/2006 Steeves
 7,023,995 B2 4/2006 Olsson
 7,069,319 B2 6/2006 Zellner et al.
 7,079,627 B2 * 7/2006 Crago et al. 379/45
 7,085,555 B2 8/2006 Zellner et al.
 7,103,368 B2 9/2006 Teshima 455/456.3
 7,106,843 B1 9/2006 Gainsboro et al. 379/191
 7,110,749 B2 9/2006 Zellner et al.
 7,116,977 B1 * 10/2006 Moton et al. 455/419
 7,123,693 B2 * 10/2006 Nelson et al. 379/45
 7,181,225 B1 2/2007 Moton et al.
 7,212,829 B1 5/2007 Lau et al. 455/456.1
 7,260,186 B2 * 8/2007 Zhu et al. 379/45
 7,260,378 B2 8/2007 Holland et al. 455/404.2
 7,330,464 B2 * 2/2008 Brouwer et al. 370/352
 7,433,673 B1 * 10/2008 Everson et al. 455/404.1
 7,529,359 B2 * 5/2009 Gallant et al. 379/210.02
 2001/0034709 A1 10/2001 Stoifo et al. 705/51
 2002/0052781 A1 5/2002 Aufricht et al.
 2002/0077083 A1 6/2002 Zellner et al.
 2002/0077084 A1 6/2002 Zellner et al.
 2002/0077130 A1 6/2002 Owensby 455/466
 2002/0077897 A1 6/2002 Zellner et al.
 2002/0102993 A1 8/2002 Hendrey et al.
 2002/0107027 A1 8/2002 O'Neil
 2003/0109245 A1 * 6/2003 McCalmont et al. 455/404
 2004/0205198 A1 10/2004 Zellner et al.
 2005/0272445 A1 12/2005 Zellner
 2006/0094447 A1 5/2006 Zellner
 2006/0105784 A1 5/2006 Zellner et al.
 2006/0167986 A1 7/2006 Trzyna et al. 709/203
 2007/0042789 A1 2/2007 Moton et al. 455/456.1
 2007/0047523 A1 * 3/2007 Jiang 370/352

FOREIGN PATENT DOCUMENTS

WO WO 98/19484 7/1998
 WO WO 99/27716 3/1999
 WO WO 99/27716 * 6/1999

OTHER PUBLICATIONS

Written Opinion, PCT/US01/22295.
 "Wireless Application Protocol", Oct. 1999 Wireless Internet Today, pp. 1-20.
 Mark Moeglein, et al., "An Introduction to Snap Track Server-Aided GPS Technology", available at <http://www.snaptrack.com/atwork.html>.

“Signal Soft Wireless Location Services”, available at http://www.signalsoftcorp.com/products/location_manager.html.
 U.S. Appl. No. 09/739,339.
 U.S. Appl. No. 09/739,162.
 U.S. Appl. No. 09/606,535.
 U.S. Appl. No. 09/606,534.
 U.S. Appl. No. 09/739,340.
 U.S. Appl. No. 09/739,315.
 Microsoft Mobility Developer Conference 2003.
 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Functional Stage 2 Description of Location Services in UMTS (1999).
 U.S. Official Action dated Aug. 30, 2005 in U.S. Appl. No. 10/704,775.
 U.S. Official Action dated Oct. 4, 2005 in U.S. Appl. No. 10/819,940.
 Co-pending U.S. Appl. No. 11/252,039, filed Oct. 17, 2005.
 U.S. Official Action dated Mar. 1, 2004 cited in U.S. Appl. No. 09/740,375.
 U.S. Final Official Action dated Sep. 24, 2004 cited in U.S. Appl. No. 09/740,375.
 U.S. Official Action dated Feb. 28, 2005 cited in U.S. Appl. No. 09/740,375.
 U.S. Final Official Action dated Jul. 26, 2005 cited in U.S. Appl. No. 09/740,375.
 Petronis, Scott, “Mapping Technology: The Common Thread,” Wireless Review, vol. 17, No. 3, pp. 10-14, Feb. 1, 2000, ISSN: 1099-9248.
 U.S. Official Action dated May 7, 2003 cited in U.S. Appl. No. 09/740,373.
 U.S. Final Official Action dated Oct. 21, 2003 cited in U.S. Appl. No. 09/740,373.
 U.S. Official Action dated Jan. 26, 2004 cited in U.S. Appl. No. 09/740,373.
 U.S. Official Action dated Apr. 28, 2005 cited in U.S. Appl. No. 09/740,373.
 U.S. Official Action dated Nov. 21, 2005 cited in U.S. Appl. No. 09/740,414.
 U.S. Official Action dated Dec. 13, 2005 cited in U.S. Appl. No. 09/740,372.
 U.S. Official Action dated Jun. 7, 2005 in U.S. Appl. No. 09/630,134.
 U.S. Official Action dated Jul. 26, 2005 in U.S. Appl. No. 09/740,414.
 U.S. Official Action dated Feb. 3, 2006 cited in U.S. Appl. No. 09/739,315.
 U.S. Official Action dated Mar. 10, 2006 cited in U.S. Appl. No. 11/252,039.
 U.S. Appl. No. 11/298,419, entitled “System and Method for Using Location Information to Execute an Action” filed Dec. 9, 2005, Inventors: Robert T. Moton Jr.; Mark J. Enzmann; and Samuel N. Zellner.
 U.S. Appl. No. 11/298,149, entitled “System and Method for Using Location Information to Execute an Action” filed Dec. 9, 2005, Inventors: Robert T. Moton Jr.; Mark J. Enzmann; and Samuel N. Zellner.
 U.S. Appl. No. 11/300,694, entitled “System and Method for Using Location Information to Execute an Action” filed Dec. 15, 2005, Inventors: Samuel N. Zellner.
 U.S. Official Action dated Apr. 21, 2006 cited in U.S. Appl. No. 11/322,531.
 U.S. non-final Official Action dated Oct. 5, 2006 in U.S. Appl. No. 11/298,149.
 U.S. Appl. No. 11/528,782, entitled “System and Method for Using Location Information to Execute an Action,” filed Sep. 28, 2006, Inventors: Robert T. Moton, Jr. et al.
 U.S. Appl. No. 11/516,164, entitled “System and Method for Using Location Information to Execute an Action,” filed Sep. 6, 2006, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.
 U.S. Appl. No. 11/522,239, entitled “System and Method for Using Location Information to Execute an Action,” filed Sep. 15, 2006, Inventors: Samuel N. Zellner.
 U.S. Appl. No. 11/375,849, entitled “Anonymous Location Service for Wireless Networks,” filed Mar. 15, 2006, Inventors: Samuel N. Zellner; Mark J. Enzmann, Robert T. Moton, Jr.

U.S. Appl. No. 11/187,347, entitled “Location-Based Security Rules,” filed Jul. 21, 2005, Inventors: Samuel N. Zellner.
 U.S. Appl. No. 11/406,881, entitled “Location Blocking Service From a Wireless Service Provider,” filed Apr. 19, 2006, Inventors: Samuel N. Zellner; Mark J. Enzmann, Robert T. Moton, Jr.
 U.S. Appl. No. 09/740,375, entitled “Identity Blocking Service From a Web Advertiser,” filed Dec. 19, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann, Robert T. Moton, Jr.
 U.S. Appl. No. 11/322,531, entitled “Location Blocking Service From a Web Advertiser,” filed Dec. 30, 2005, Inventors: Samuel N. Zellner; Mark J. Enzmann, Robert T. Moton, Jr.
 U.S. non-final Official Action dated Apr. 22, 2005 in U.S. Appl. No. 09/739,340.
 U.S. final Official Action dated Apr. 8, 2005 in U.S. Appl. No. 09/739,162.
 U.S. non-final Official Action dated Dec. 19, 2005 cited in U.S. Appl. No. 09/740,375.
 U.S. non-final Official Action dated Feb. 6, 2006 cited in U.S. Appl. No. 09/740,375.
 U.S. final Official Action dated May 19, 2006 cited in U.S. Appl. No. 09/740,375.
 BellSouth “The Real Yellow Pages”, Greater Atlanta A-L, 2004 BellSouth Advertising & Publishing Corp.
 BellSouth “The Real Yellow Page”, Greater Atlanta M-Z, 2004 BellSouth Advertising & Publishing Corp.
 U.S. Appl. No. 11/589,688, filed Oct. 30, 2006, entitled “Location Query Service for Wireless Networks”.
 U.S. non-final Official Action dated Dec. 15, 2006 in U.S. Appl. No. 11/522,239.
 U.S. non-final Official Action dated Jan. 9, 2007 in U.S. Appl. No. 11/406,881.
 U.S. final Official Action dated Jan. 11, 2007 in U.S. Appl. No. 11/322,531.
 U.S. non-final Official Action dated Jan. 16, 2007 in U.S. Appl. No. 11/187,347.
 U.S. final Official Action dated Feb. 6, 2007 in U.S. Appl. No. 11/252,039.
 U.S. non-final Official Action dated Apr. 6, 2007 in U.S. Appl. No. 11/298,419.
 U.S. Appl. No. 11/637,369, filed Dec. 12, 2006, entitled “Surveying Wireless Device Users by Location”.
 U.S. Appl. No. 11/959,283, filed Dec. 18, 2007, entitled “Location-Based Security Rules”.
 U.S. Final Office Action dated Jul. 19, 2007 in U.S. Appl. No. 11/298,149.
 U.S. Final Office Action dated Sep. 10, 2007 in U.S. Appl. No. 11/522,239.
 U.S. Office Action dated Sep. 12, 2007 in U.S. Appl. No. 11/406,881.
 U.S. Office Action dated Sep. 13, 2007 in U.S. Appl. No. 11/252,039.
 U.S. Final Office Action dated Nov. 15, 2007 cited in U.S. Appl. No. 11/298,419.
 U.S. Office Action dated Dec. 31, 2007 cited in U.S. Appl. No. 11/528,782.
 U.S. Final Office Action dated Mar. 18, 2008 in U.S. Appl. No. 11/252,039.
 U.S. Final Office Action dated Apr. 3, 2008 in U.S. Appl. No. 11/589,688.
 U.S. Appl. No. 10/704,775, entitled “Location Blocking Service for Wireless Networks,” filed Nov. 12, 2003, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.
 U.S. Appl. No. 10/819,940, entitled “Anonymous Location Service for Wireless Networks,” filed Apr. 8, 2004, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.
 U.S. Appl. No. 09/740,414, entitled “Location Blocking Service from a Wireless Service Provider,” filed Dec. 19, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.
 U.S. Appl. No. 09/740,372, entitled “Identity Blocking Service from a Wireless Service Provider,” filed Dec. 19, 2000, Inventors: Samuel N. Zellner; Mark J. Enzmann; and Robert T. Moton Jr.
 U.S. Official Action dated Jun. 21, 2004 in U.S. Appl. No. 09/739,315.
 U.S. Official Action dated Feb. 9, 2005 in U.S. Appl. No. 09/739,315.

US 7,796,998 B1

Page 4

U.S. Official Action dated Mar. 12, 2004 in U.S. Appl. No. 09/739,340.

U.S. Official Action dated Dec. 10, 2004 in U.S. Appl. No. 09/739,340.

U.S. Official Action dated May 16, 2003 in U.S. Appl. No. 09/740,372.

U.S. Official Action dated Oct. 30, 2003 in U.S. Appl. No. 09/740,372.

U.S. Official Action dated Apr. 15, 2004 in U.S. Appl. No. 09/740,372.

U.S. Official Action dated Nov. 2, 2004 in U.S. Appl. No. 09/740,372.

U.S. Official Action dated Nov. 10, 2003 in U.S. Appl. No. 09/739,162.

U.S. Official Action dated Mar. 9, 2004 in U.S. Appl. No. 09/739,162.

U.S. Official Action dated Sep. 9, 2004 in U.S. Appl. No. 09/739,162.

U.S. Official Action dated Nov. 10, 2003 in U.S. Appl. No. 09/740,414.

U.S. Official Action dated Apr. 21, 2004 in U.S. Appl. No. 09/740,414.

U.S. Official Action dated Oct. 5, 2004 in U.S. Appl. No. 09/740,414.

http://www.openwave.com/us/news_room/press_releases/2001/20010320, "Open Wave Announces Availability to End-to-End Set of Location Services for Wireless Internet".

* cited by examiner

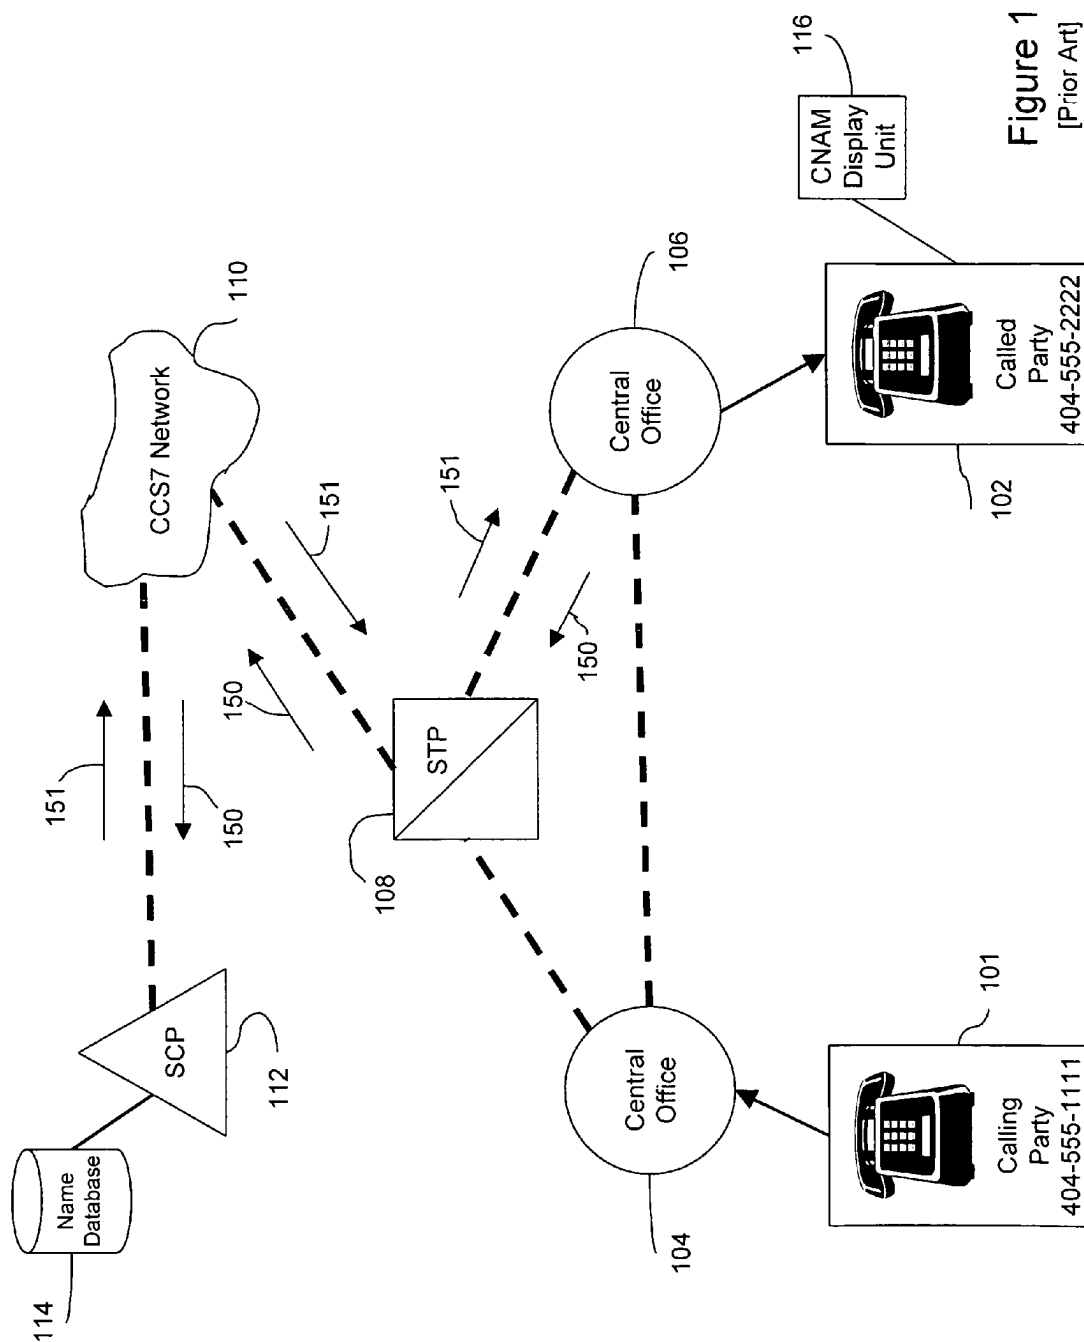


Figure 1
[Prior Art]

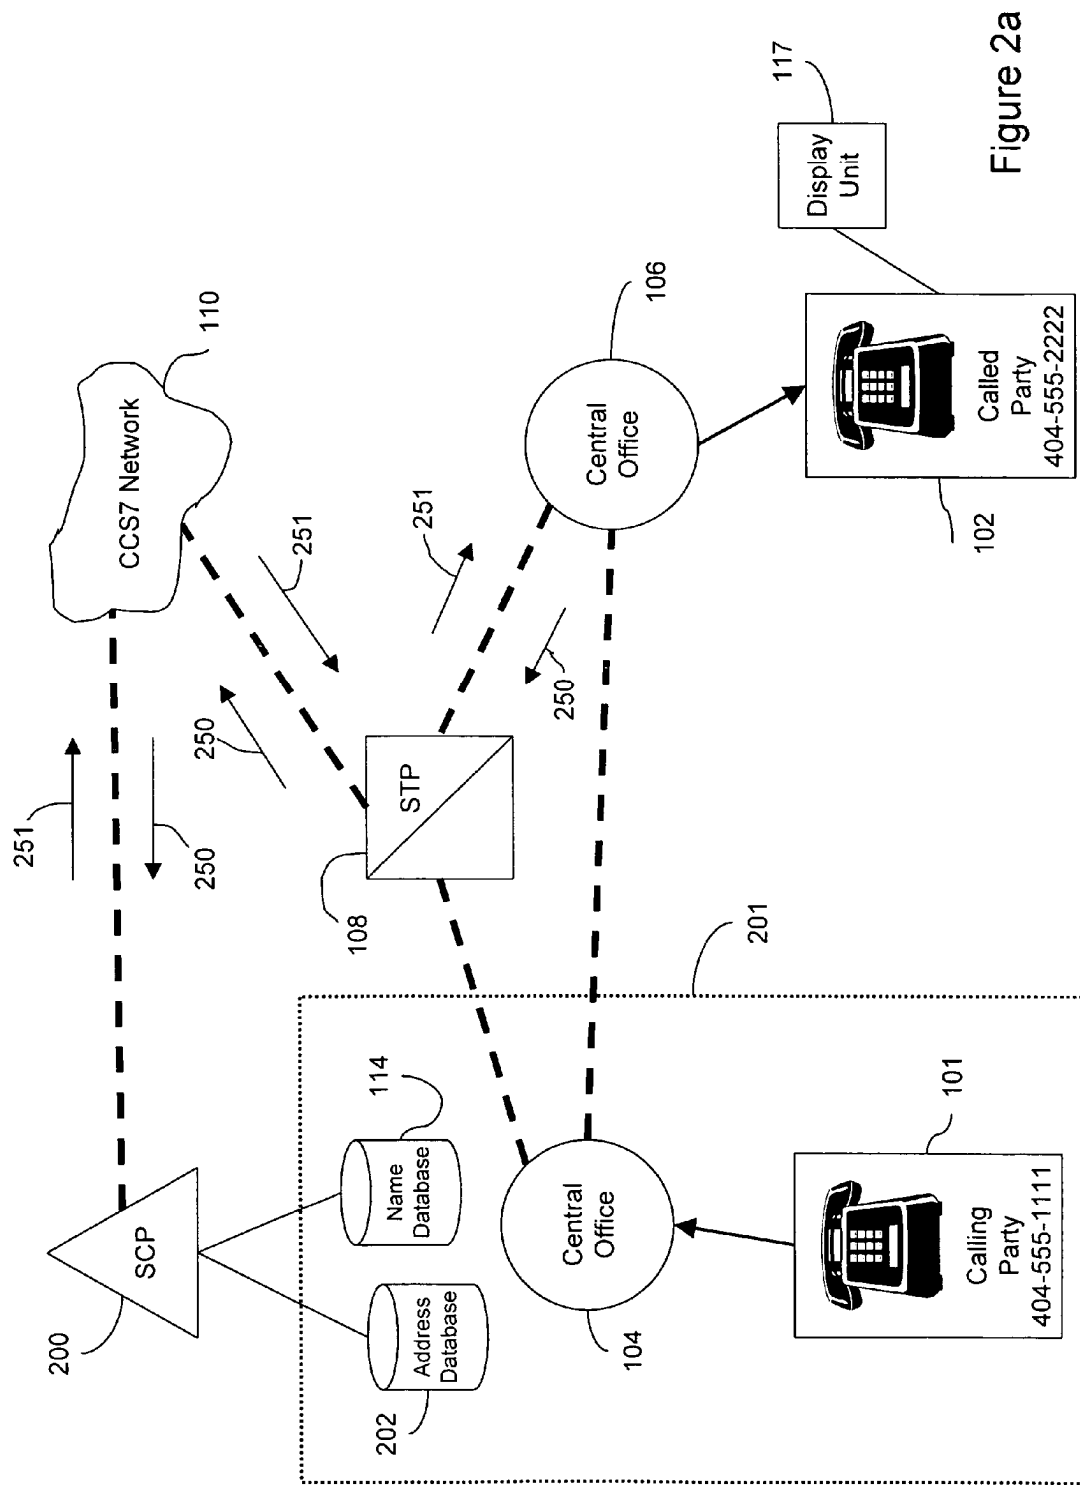


Figure 2a

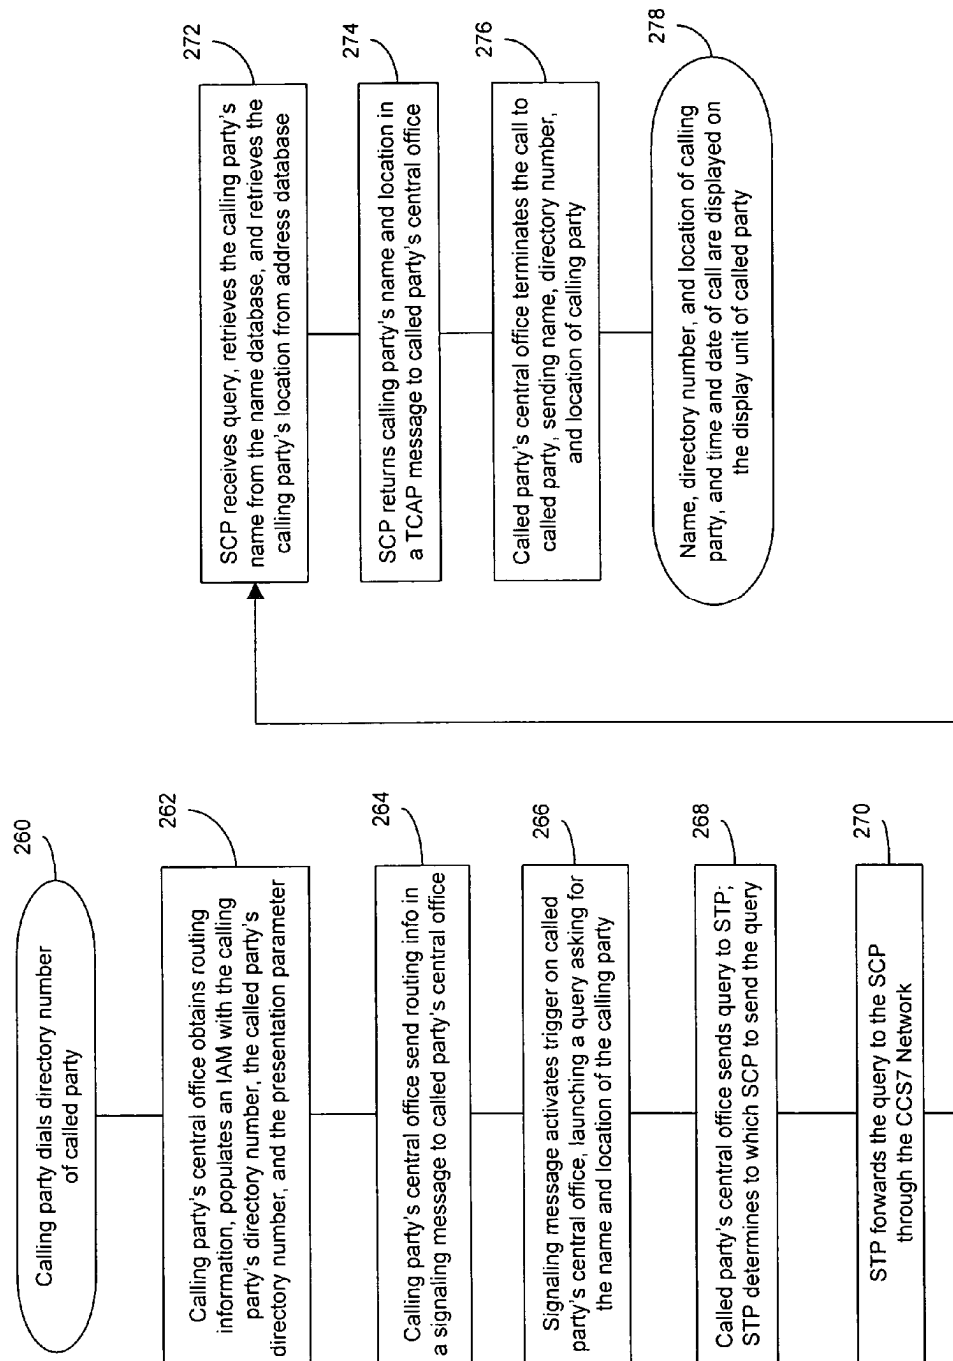


Figure 2b

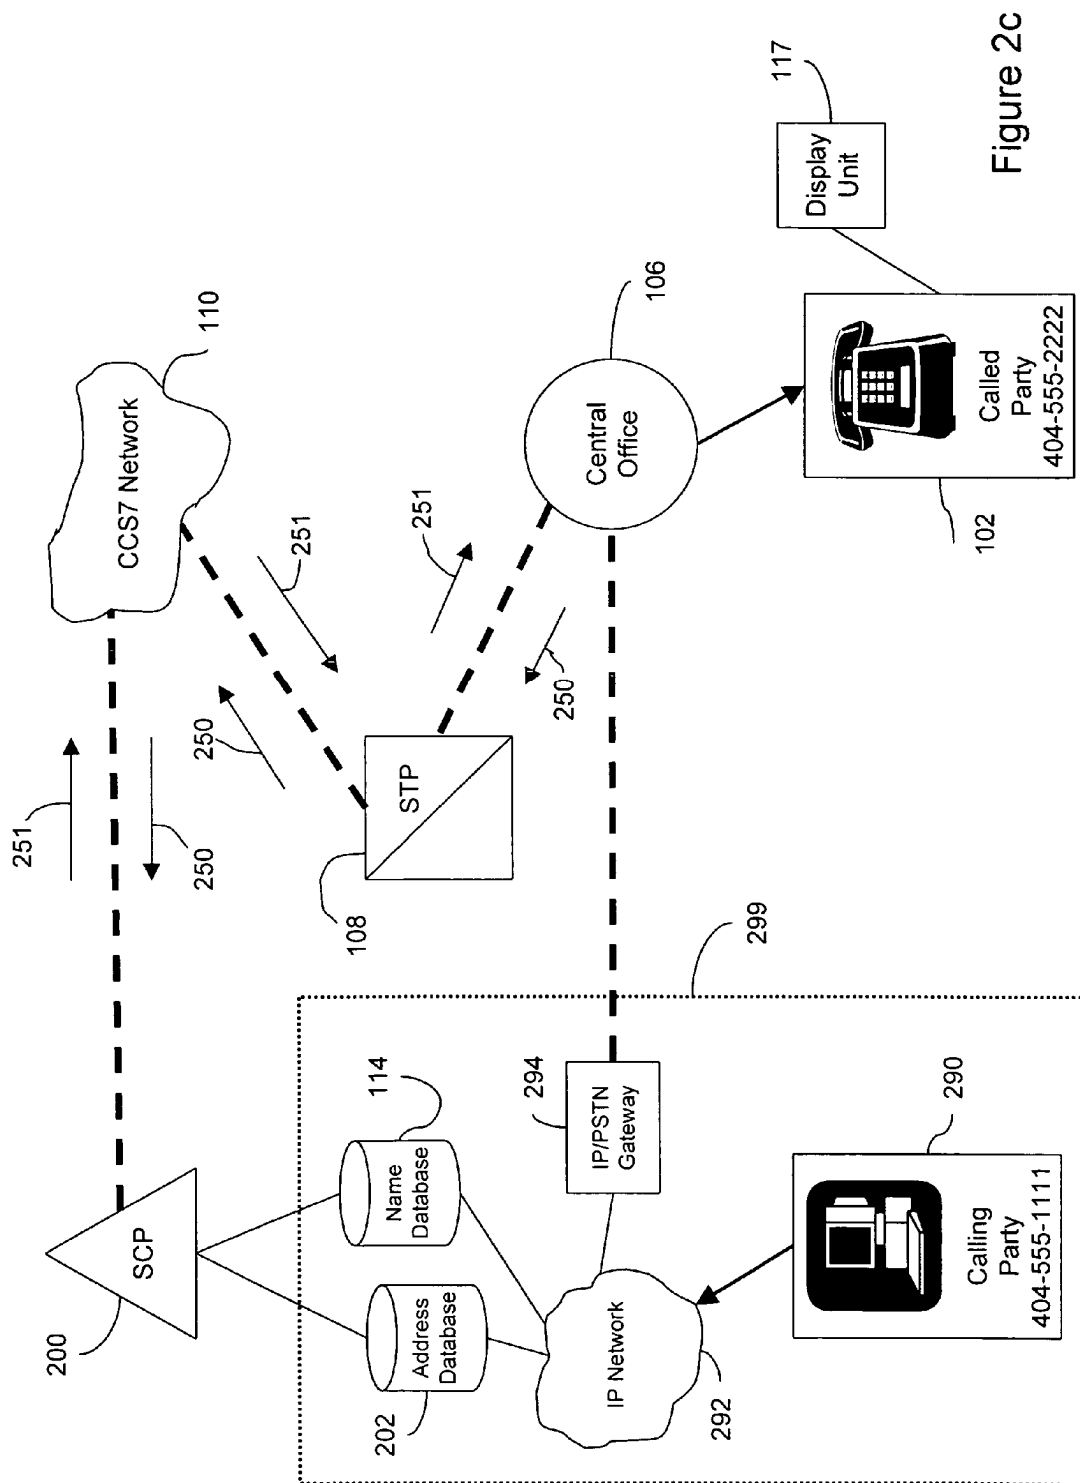


Figure 2c

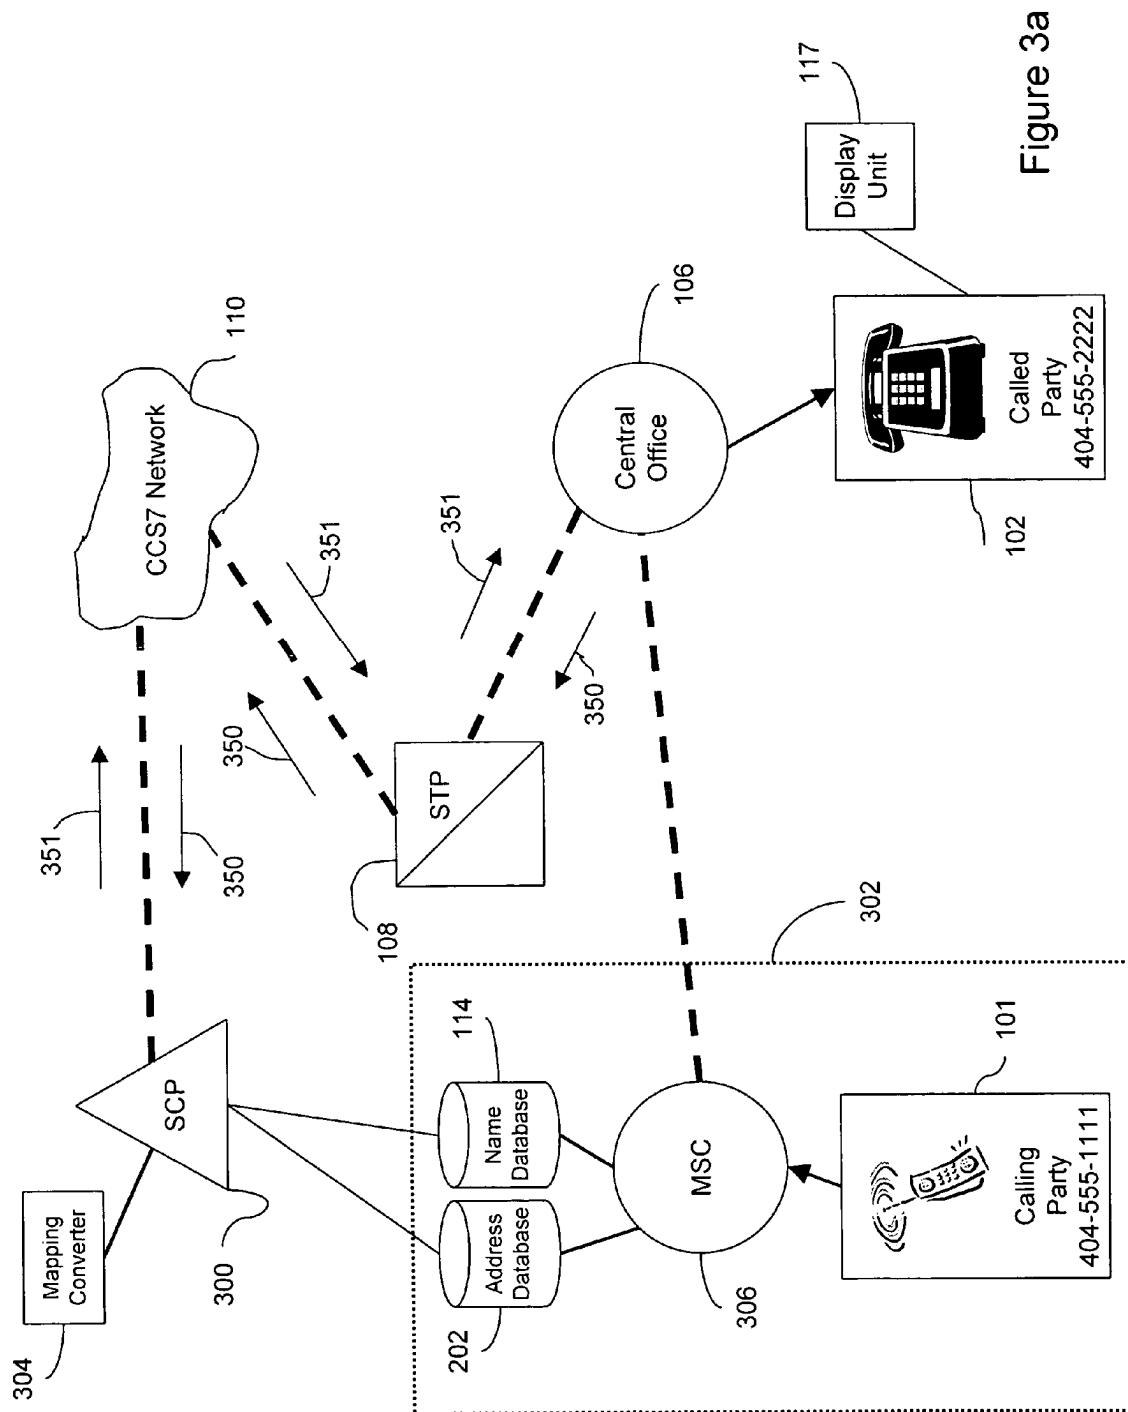


Figure 3a

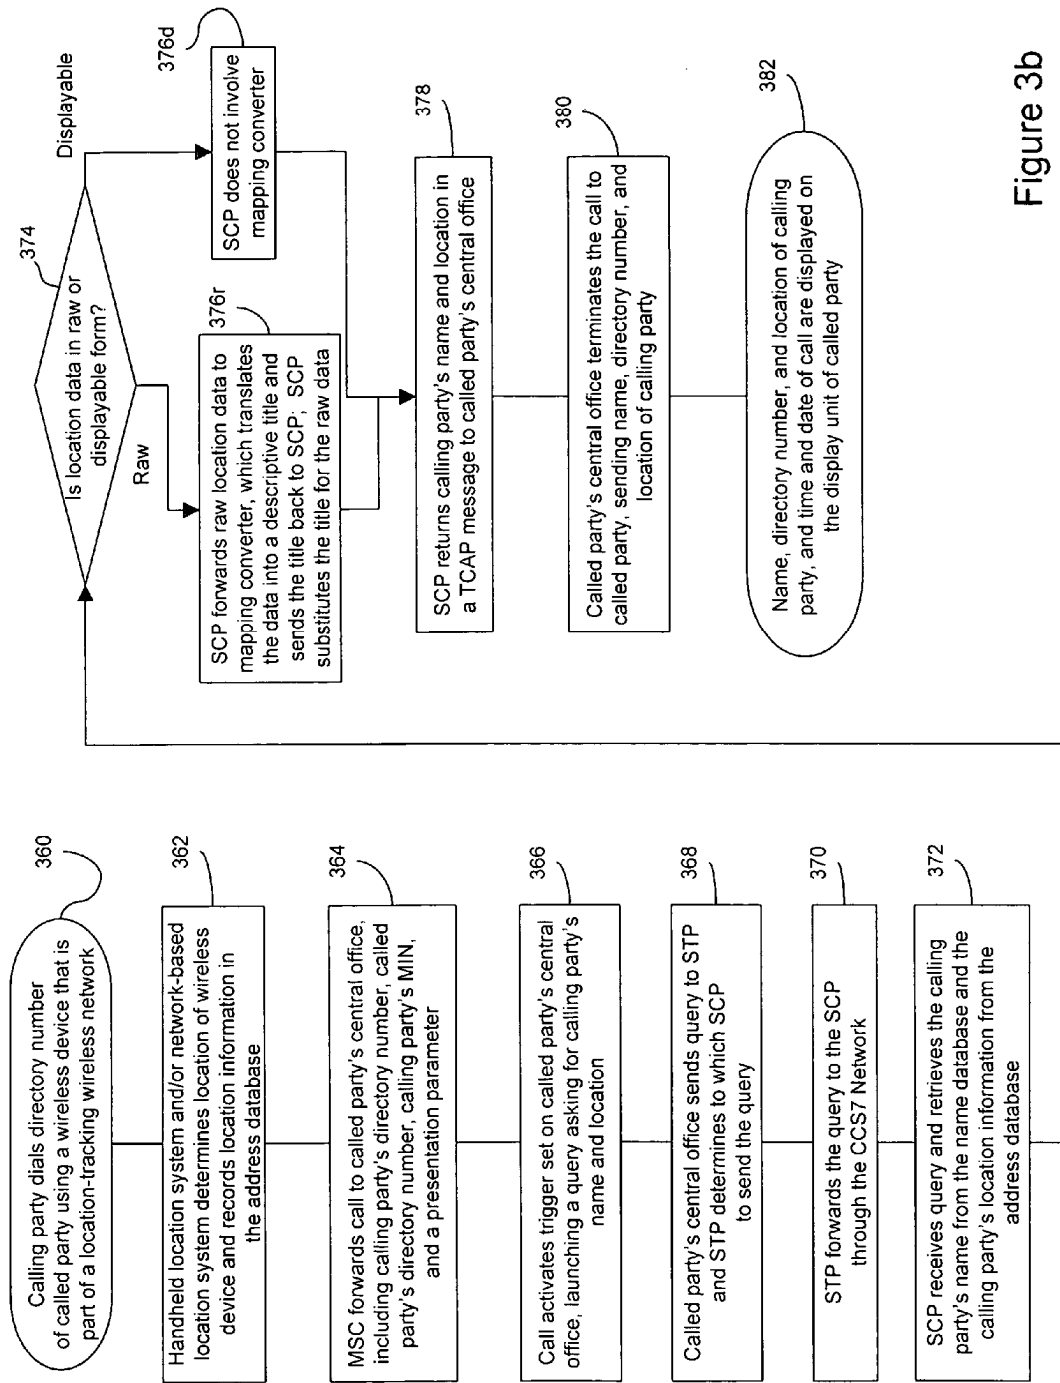


Figure 3b

1

METHOD AND SYSTEM FOR DELIVERY OF A CALLING PARTY'S LOCATION

BACKGROUND

1. Field of the Invention

The present invention relates to telecommunication systems, and in particular, to caller name delivery services and networks that track the location and identity of network devices.

2. Background of the Invention

Users of modern public switched telephone networks (PSTNs) have long enjoyed the benefits of calling name delivery (CNAM), also known as caller identification or caller ID. CNAM enables a called party to view information about a calling party on a display unit, which is typically a liquid crystal display (LCD), a light-emitting diode (LED) display, or a comparable device. The displayed information generally includes at least the calling party's name, the calling party's directory number, and the date and time of the call.

PSTNs typically provide CNAM information (except for the date and time, which is generally provided by the display unit) using the model illustrated in FIG. 1, which is a prior art schematic of a CNAM system architecture implemented within an Advanced Intelligent Network (AIN). AIN networks use a complex, high speed, high traffic volume data packet-switched messaging system to provide versatility in the handling of telephone calls. The Advanced Intelligent Network System is described in U.S. Pat. No. 5,701,301 and U.S. Pat. No. 5,838,774, which are hereby incorporated by reference in their entirety.

Referring to FIG. 1, CNAM is typically implemented in the following manner. A calling party 101 picks up the telephone and dials the directory number of a called party 102, which is 404-555-2222. Called party 102 is a CNAM subscriber having a CNAM display unit 116. CNAM display unit 116 could be separate from or integral to the device of called party 102. After calling party 101 dials the directory number, a central office 104 (also referred to as a service switching point) serving calling party 101 obtains routing information and populates an initial address message (IAM) with certain information. The IAM is a parameter that exists within an integrated services digital network user part (ISUP) signaling message. The IAM is a defined message type from TR-NTW-000246 and ITU Q.764/Q.767, and is one of a sequence of messages used in ISUP trunk signaling. An ISUP signaling message employs a Common Circuit Signaling System 7 (CCS7) call setup protocol. In particular, the IAM is populated with the directory number of calling party (404-555-1111), the directory number of the called party (404-555-2222), and a presentation parameter. In this case, the presentation parameter allows a CNAM display.

Central office 104 then sends this routing information in the signaling message to a central office 106, which serves called party 102. Recognizing that the call is for a CNAM subscriber, central office 106 halts the calling process to launch a calling name query 150 on the CCS7 network. As a part of the query launch, central office 106 populates a called party address parameter in query 150 with the directory number of calling party 101, in this case 404-555-1111. The called party address parameter is a routing parameter within an Advanced Intelligent Network (AIN) query package.

After central office 106 has populated the called party address parameter, calling name query 150 is sent to a signaling transfer point (STP) 108. STP 108 performs a global title translation (GTT) on the called party address parameter to determine to which service control point (SCP) calling name

2

query 150 should be routed. This determination is made based on the first three digits (the numbering plan area, or NPA) in the directory number of calling party 101, which in this case is 404. STP 108 then forwards the calling name query to the appropriate SCP 112 through CCS7 Network 110. SCP 112 searches a CNAM database 114 for calling party's record from which SCP 112 retrieves the associated name. CNAM database 114 is preferably a part of SCP 112, as shown in FIG. 1, but may be separate from SCP 112, or incorporated as part of another network element such as a service node or a switch.

SCP 112 returns the name associated with the directory number of calling party 101 in a transaction capability application part (TCAP) response 151 to central office 106 through CCS7 Network 110 and STP 108. TCAP response 151 is the final message containing instructions on how to handle the call. TCAP response 151 ends the SSP/SCP transaction that began with calling name query 150. In this example, the full name of calling party 101 is returned in TCAP response 151 to central office 106.

When central office 106 terminates the call to called party 102, central office 106 sends the name of calling party 101 and the directory number of calling party 101 (404-555-1111). Central office 106 sends this information over called party's line to called party's display unit 116. The information is then displayed on called party's display unit 116, along with the date and time of the call (generated by display unit 116).

The principal advantage of conventional CNAM services is the ability to screen calls. Upon receiving a call, a called party can review the information on the display unit and decide whether or not to answer the call. However, users wanting to screen calls and fulfill other location-sensitive purposes often prefer to know more about the calling party than just name, number, date, and time. For instance, a service dispatcher monitoring the activities of his service technician may wish to receive the exact location of his technician each time the technician calls in, so as to facilitate efficient scheduling of the next assignment. Although the name and number on the CNAM display unit could possibly provide clues to the technician's location, the dispatcher would prefer seeing a more precise and easily understandable description of location, e.g., a street address or building name. Thus, although the typical CNAM information may be suitable for simple call screening, many telephone users would prefer to receive even more information about the calling party.

SUMMARY OF THE INVENTION

The present invention is a method and system for providing a service that delivers location information associated with a caller. The service operates in both wireline and wireless networks, providing called parties with the location information of calling parties who use either stationary or wireless telephones. The service can operate as a stand alone service or can be a part of a CNAM service, delivering location information in addition to the conventional name, number, date, and time. In conjunction with any call, the present invention reports to the called party the location from which the calling party is calling. Therefore, a subscriber can use the valuable location information to better screen calls and to fulfill other location-sensitive purposes.

The primary components of the present invention include a service control point, an address database in communication with the service control point, and a network that tracks the locations of network users. The service control point operates within a PSTN in cooperation with other AIN components, such as signal transfer points and service switching points.

The address database operates within the location-tracking network and allows access by the service control point to its contents. The location-tracking network interfaces with the PSTN to terminate calls between location-tracking network users and PSTN users. For example, for a wireline network, central offices provide this interface. As another example, for a wireless network, mobile switching centers (MSCs) provide this interface. As another example, for voice over Internet protocol (VoIP) calls, an Internet protocol network and an IP-to-PSTN gateway provide the interface.

The service control point performs service logic in response to a query requesting the location of a calling party. The service control point can also execute logic in response to a query for the caller name. The service control point accesses the name database (for CNAM) and the address database (for location information delivery). In response to queries, the service control point also returns routing instructions to direct the service switching points how to terminate a call and to provide CNAM and location information for presenting on a display unit.

The address database cross-references location information with directory numbers, listing location information for every directory number. These directory numbers (commonly referred to as telephone numbers) correspond to stationary terminal devices (e.g., telephones connected to the wireline network) and to mobile devices (e.g., cellular telephones). For stationary terminal devices, the location-tracking network records each entry in the address database upon service activation and does not change the entry unless the terminal device is disconnected and/or moved. For mobile devices, the location-tracking network periodically updates entries in the address database, changing the location information as the mobile devices move from place to place.

The location-tracking network is a call carrier that tracks the locations of its users and maintains the information in the address database. For example, the location-tracking network could be a wireline network that records the location of stationary terminal devices upon service activation. As another example, the location-tracking network could be a conventional wireless network providing such services as paging, digital cellular, and personal communications services (PCS). To track location of wireless network users, the wireless network would use, for example, handheld device location systems or network-based location systems. As another example, the location-tracking network could be an Internet protocol network, in which location could be an email address.

Together, in the context of a call, these components deliver the location of a calling party to a called party for presentation to the called party using such media as textual displays, graphical displays, and audio messages. The methods by which the locations are delivered vary depending on whether the calling party is using a stationary terminal device or a mobile device. Broadly stated, the method of the present invention for delivering a calling party's location in the context of a call from a stationary terminal device includes receiving the call at a service switching point, activating a trigger set for calls to a location delivery subscriber (the called party), sending a query to the service control point requesting location information, searching the address database for the calling party's directory number to determine the calling party's location, returning routing instructions and the calling party's location to the service switching point, routing the call to the called party, and displaying the calling party's location on the called party's display unit. Alternately, the method could also include searching a name database in communication with the service control point for the calling

party's number to determine the calling party's name, returning the calling party's name, and displaying the calling party's name on the display unit.

In the context of a call from a mobile device, the method of the present invention generally includes determining the calling party's location using a location system of the location-tracking network, recording the calling party's location in the address database with an associated identifier (e.g., Mobile Identification Number, or MIN), forwarding the call to a service switching point of the PSTN, activating a trigger set for calls to a location delivery subscriber (the called party), sending a query to the service control point requesting location information, searching the address database for the calling party's directory number to determine the calling party's location, returning routing instructions and the calling party's location to the service switching point, routing the call to the called party, and displaying the calling party's location on the called party's display unit.

Preferably, the location system records the calling party's location in a way meaningful to the location delivery subscriber of the location information delivery service. For example, location information could include street addresses, landmarks, or building names. However, if the location system provides less descriptive location information, this method may also include the step of converting the location information provided by the location system into a more meaningful description or a description better suited for displaying on a display unit. For example, if the location system merely provides position coordinates, the service control point could use a mapping converter to translate the position coordinates received from the address database into a street address or building name for display on the display unit.

Alternatively, in addition to location delivery, the present invention could also include searching a name database in communication with the service control point for the calling party's identifier to determine the calling party's name, returning the calling party's name, and displaying the calling party's name on the display unit.

Accordingly, it is an object of the present invention to provide a subscriber with the location of a calling party.

Another object of the present invention is to provide location delivery subscribers with easy to understand location descriptions.

Another object of the present invention is to provide a location delivery service for both wireline and wireless network users and for both stationary terminal devices and mobile devices.

These and other objects of the present invention are described in greater detail in the detailed description of the invention, the appended drawings, and the attached claims.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a prior art schematic diagram illustrating the CNAM operating environment.

FIG. 2a is a schematic diagram of a system architecture that provides location delivery for calling parties using stationary terminal devices, according to a preferred embodiment of the present invention.

FIG. 2b is a flowchart, corresponding to FIG. 2a, outlining the method steps for delivering the location of a calling party using a stationary terminal device, according to a preferred embodiment of the present invention.

FIG. 2c is a schematic diagram of a system architecture that provides location delivery for calling parties using stationary VoIP terminal devices, according to an alternate preferred embodiment of the present invention.

FIG. 3a is a schematic diagram of a system architecture that provides location delivery for calling parties using mobile devices, according to a preferred embodiment of the present invention.

FIG. 3b is a flowchart, corresponding to FIG. 3a, outlining the method steps for delivering the location of a calling party mobile devices, according to a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is a location delivery service for called parties. The invention provides subscribing called parties with location information about calling parties, for both stationary terminal devices (e.g., wireline) and mobile devices (e.g., wireless). The location delivery service enables a subscriber to more effectively screen calls and to satisfy other location-sensitive purposes. The present invention contemplates future enhanced digital cellular networks that will track the identity and location of each wireless network user.

The system of the present invention provides location delivery using at least a service control point, an address database in communication with the service control point, and a network that tracks the locations of network devices. If the location-tracking network provides location information in a form unsuitable for display on a display unit, the system further includes a mapping converter in communication with the service control point. The method of the present invention varies according to whether a calling party is a stationary terminal device (e.g., wireline) or a mobile device (e.g., wireless). The system architecture of FIG. 2a and the corresponding flowchart of FIG. 2b illustrate the location delivery service for a wireline call from a stationary terminal device, according to a preferred embodiment of the present invention. The system architecture of FIG. 3a and the corresponding flowchart of FIG. 3b illustrate the location delivery service for a wireless call from a mobile device, according to another preferred embodiment of the present invention.

Referring to FIG. 2a, the primary components of the stationary terminal device embodiment of the present invention include SCP 200 and address database 202. Address database 202 is a part of location-tracking network 201 and contains a location description for the location-tracking network terminal devices (e.g., telephones) organized by directory number. SCP 200 is in communication with address database 202 and is specially programmed to perform location delivery logic. Specifically, in response to a query requesting location information, SCP 200 reads the calling party information embedded in the query, and consults address database 202 for the calling party's location (i.e., the location of the calling party's wireline network terminal). SCP 200 returns routing instructions including the location of the calling party. Optionally, the query also asks for call name delivery information, in response to which SCP 200 consults name database 114 for the calling party's name and SCP 200 returns the name and telephone number of the calling party along with the location information.

Address database 202 and name database 114 are preferably maintained by location-tracking network 201 as shown in FIG. 2a, whereby network user names and locations are stored upon service activation and SCP 200 is given access to the information. Alternatively, the network of SCP 200 could maintain address database 202 and name database 114.

Based on the system architecture shown in FIG. 2a, a preferred embodiment of the present invention delivers the location information of a calling party using a stationary terminal device according to the method shown in FIG. 2b.

Although this method describes location information delivered in the context of CNAM, the present invention could provide location delivery wholly separate from a CNAM service. In addition, while the system operation described herein and illustrated in the diagrams and flowcharts contains many specific details, these specific details should not be construed as limitations on the scope of the invention, but rather as examples of preferred embodiments thereof. As would be apparent to one of ordinary skill in the art, many other variations on the system operation are possible, including differently grouped and ordered method steps. Accordingly, the scope of the invention should be determined not by the embodiments illustrated, but by the appended claims and their equivalents.

Referring to FIGS. 2a and 2b, in step 260, calling party 101 dials the directory number of a called party 102 (404-555-2222). Called party 102 is a CNAM subscriber having a display unit 117. In step 262, central office 104 serving calling party 101 obtains routing information, populates an initial address message (IAM) with the directory number of calling party 101 (404-555-1111), the directory number of the called party 102 (404-555-2222), and a presentation parameter (in this example) that allows a CNAM display. In step 264, central office 104 sends this routing information in the signaling message to central office 106, which serves called party 102.

In step 266, the signaling message activates a trigger on central office 106 set for calls to a CNAM and location delivery subscriber (the called party). The trigger launches a query 250 asking for the name and location of the calling party, and including in the called party address parameter the directory number of calling party 101, 404-555-1111. In step 268, central office 106 sends query 250 to STP 108, which performs a global title translation on the called party address parameter and determines that query 250 should be routed to SCP 200. STP 108 then forwards the query 250 to SCP 200 through CCS7 Network 110 in step 270.

In response to query 250, in step 272, SCP 200 searches name database 114 for calling party 101's record, from which SCP 200 retrieves the associated name. SCP 200 also searches address database 202 for calling party 101's record from which SCP 200 retrieves calling party 101's location information.

In step 274, SCP 200 returns the name and location associated with the directory number of calling party 101 (along with call routing instructions) in a transaction capability application part (TCAP) response 251 to central office 106 through CCS7 Network 110 and STP 108. In step 276, central office 106 terminates the call to called party 102, sending the name, directory number, and location of calling party 101. Finally, in step 278, the information, including the location of calling party 101, is displayed on called party's display unit 117. Display unit 117 also generates and displays the date and time of the call. Thus, for the wireline call, called party 102 knows the location of calling party 101 before answering the telephone call.

Although called party 102 is depicted as a wireline device in FIG. 2a, one of ordinary skill in the art would appreciate that called party 102 could also be a wireless network user to which SCP 200 delivers location information. In such a case, the system architecture would preferably include a mobile switching center (MSC) between central office 106 and called party 102. The location information originating from SCP 200 would pass through CCS7 Network 110, STP 108, central office 106, the MSC, and onto the called party 202. Also, preferably display unit 117 would be integral to the device of called party 102.

In addition, although calling party **101** is shown as a part of a separate location-tracking network **201** in FIG. **2a**, one of ordinary skill in the art would appreciate that calling party **101** could be within the same network as called party **102**. In such case, address database **202** and name database **114** would also be within the same network.

In an alternate preferred embodiment of the present invention, the calling party is a stationary VoIP telephone, instead of a stationary wireline telephone, and the location-tracking network is an IP network (shown generally as **299**). As shown in FIG. **2c**, VoIP telephone **290** is in communication with IP network **292**. IP network **292** is in communication with name database **114** and address database **202** and maintains the information within the databases. To facilitate calls to and from the circuit-switched PSTN network, IP network **292** is in communication with central office **106** through gateway **294**. Gateway **294** handles IP to PSTN conversions. Within this IP/PSTN system architecture, the method for delivering location information is as described above for the stationary wireline telephone, in FIGS. **2a** and **2b**.

FIG. **3a** illustrates a system architecture that provides location delivery for calling parties using mobile devices, according to a preferred embodiment of the present invention. As shown, the primary components of the mobile device embodiment of the present invention include SCP **300** and a location-tracking network **302**, which in this case is a wireless network. Wireless network **302** tracks the location of wireless network devices, such as cellular telephones and interactive pagers, and records location data in address database **202** as part of each call. The methods by which wireless network **302** determines the location of a mobile wireless network device are described below. Wireless network **302** provides SCP **300** with access to address database **202**. SCP **300** is specially programmed to perform location delivery logic. Specifically, in response to a query requesting location and CNAM information, SCP **300** reads the calling party information embedded in the query, which includes the calling party's directory number. Based on the directory number, SCP **300** consults name database **114** for calling party **101**'s name and address database **202** for calling party **101**'s location information. SCP **300** returns routing instructions including the name, telephone number, and location of the calling party.

If wireless network **302** provides location data in a rudimentary form not easily understood by a CNAM subscriber, the primary components of the wireless embodiment further include a mapping converter **304** in communication with SCP **300**, as shown in FIG. **3a**. An example of a rudimentary form would be GPS coordinates, with which the typical telephone user is unfamiliar. As used herein, "raw" refers to location data in a rudimentary form, unsuitable for display on a calling name display unit. "Displayable" refers to location data already suitable for display on a display unit. Mapping converter **304** translates the location data provided by wireless network **302** into descriptions that are understandable to the typical user. For example, if wireless network **302** furnishes GPS coordinates, mapping converter **304** could translate coordinates X-Y into "101 Park Place." In this manner, SCP **300** reads the location data provided by wireless network **302**, as translated (if necessary) by mapping converter **304**, and delivers the location information to display unit **117**.

Although FIG. **3a** shows mapping converter **304** as a separate component within the PSTN network, one of ordinary skill in the art would understand that the functions and structure of mapping converter **304** could be located in several different places. For example, mapping converter **304** could be located within SCP **300** or within name database **114**. As another example, mapping converter **304** could also be

located within wireless network **302**, in communication with location system or as part of location system. Regardless of where mapping converter **304** is provisioned, the desired end result is to deliver displayable location information to display unit **117**.

In tracking the location of network devices, wireless network **302** determines the location of a network device during origination of the call from the calling party, and records the location data in address database **202**. To obtain the location data, wireless network **302** uses any suitable location system. Examples of suitable location systems include handheld device location systems and network-based location systems. One example of a handheld device location system is a GPS mounted in a cellular telephone. Examples of network-based location systems include triangulation systems and Wireless Application Protocol (WAP) location systems. Depending on the desired degree of accuracy, one or both of the location systems can be used to determine a device's location.

Suitable WAP location services are described in WAP version 1.1, which is herein incorporated by reference in its entirety. WAP is an application environment and set of communication protocols for wireless devices designed to enable manufacturer-, vendor-, and technology-independent access to the Internet and advanced telephony services. WAP provides wireless Internet access through all digital cellular networks, giving network users a menu driven method for downloading information, such as flight schedules and bank account balances, to wireless devices from the Internet.

The present invention will enjoy widespread application as location-tracking networks continue to emerge. In particular, the present invention will take advantage of location data provided by federally mandated enhanced wireless 911 (E911) services. E911 services help ensure that wireless telephones provide 911 call centers, or Public Safety Answering Points (PSAPs), with vital information necessary to locate and identify a caller in an emergency. To comply with E911 standards promulgated by the Federal Communications Commission (FCC), wireless network providers will soon be required to track the location and identity information of all wireless callers, with the purpose of providing such information to emergency personnel when a caller dials 911 from a wireless telephone. The FCC's wireless E911 rules require certain Commercial Mobile Radio Services (CMRS) carriers to begin transmission of enhanced location and identity information in two phases. Phase I requires carriers to transmit a caller's telephone number and general location to a PSAP. Phase II requires carriers to provide more precise location information to the PSAP. Thus, the present invention will parlay the location data obtained for the mandated E911 location tracking systems into valuable location information for the benefit of all location delivery and CNAM subscribers.

Based on the system architecture shown in FIG. **3a**, a preferred embodiment of the present invention delivers the location information of a wireless calling party according to the method shown in FIG. **3b**. Although this method describes location information delivered in the context of CNAM, the present invention could provide location delivery wholly separate from a CNAM service. Referring to FIGS. **3a** and **3b**, in step **360**, calling party **101** dials the directory number of a called party **102** (404-555-2222) using a wireless device that is part of location-tracking wireless network **302**. Called party **102** subscribes to location delivery and CNAM and has a display unit **117**. In step **362**, if wireless network **302** includes a handheld location system, the wireless device of calling party **101** forwards the location information to wireless network **302**, which records the location information in address database **202**. If wireless network **302** includes a

network-based location service, the network-based location system determines the location of the handheld device and records the location information in address database 202.

In step 364, MSC 306 forwards the call to central office 106, which serves called party 102. The call includes the directory number of calling party 101 (404-555-1111), the directory number of the called party 102 (404-555-2222), the mobile identification number of calling party 101, and a presentation parameter that enables a CNAM display.

In step 366, the call activates a trigger on central office 106 set for calls to a location delivery and CNAM subscriber (the called party). The trigger launches a query 350 asking for the name and location of the calling party, and including in the called party address parameter the directory number of calling party 101, 404-555-1111. In step 368, central office 106 sends query 350 to STP 108, which performs a global title translation on the called party address parameter and determines that query 350 should be routed to SCP 300. STP 108 then forwards query 350 to SCP 300 through CCS7 Network 110 in step 370.

In step 372, in response to query 350's asking for name and location information, SCP 300 searches name database 114 for calling party 101's record (using calling party 101's directory number and/or mobile identification number) from which SCP 300 retrieves the associated name. SCP 300 also searches address database 202 and retrieves the associated location information.

In step 374, SCP 300 determines whether the location data received from wireless network 302 is in raw or displayable form. If the location data received from wireless network 302 is in raw form not easily understood by subscribers (e.g., the location data is GPS coordinates), in step 376r, SCP 300 forwards the location data to mapping converter 304, which translates the location data into a descriptive title corresponding to the raw location data and returns the descriptive title to SCP 300. SCP 300 then substitutes the descriptive title for the raw location data. If the location data is in displayable form, in step 376d, SCP 300 forwards the location data without involving mapping converter 304.

Having the location information and the name of calling party 101, SCP 300, in step 378, returns the name and location associated with the directory number of calling party 101 (along with call routing instructions) in a transaction capability application part (TCAP) response 351 to central office 106 through CCS7 Network 110 and STP 108. In step 380, central office 106 terminates the call to called party 102, sending the name, directory number, and location of calling party 101. Finally, in step 382, the information, including the location of calling party 101, is displayed on called party's display unit 117, along with the date and time of the call as generated by display unit 117.

In delivering location information, the present invention is compatible with most conventional CNAM display units. CNAM display units typically have a screen of three to four lines of text displaying 14 characters each, and can accept up to 256 characters in each TCAP message. If a CNAM delivers a calling party's name, directory number, and time and date of the call, as well as the location information of the present invention, the CNAM display unit preferably contains a screen of four lines to accommodate these four items of information. If the CNAM display unit contains only three lines, preferably the unit provides means for scrolling through the text. In either case, because conventional CNAM display units accommodate a TCAP message containing as many as 256 characters, the units have existing capacity with which to display location information. Thus, the present invention car-

ries the advantage of not requiring the procurement of additional hardware, i.e., display units.

In an alternate preferred embodiment of the present invention, calling party 101 and called party 102 are wireless device users, both associated with the same wireless network or different wireless networks. In this embodiment, for a wireless to wireless call between calling party 101 and called party 102, the method and system of location delivery occurs as outlined above, except that wireless components are used in the system architecture and wireless protocols (e.g., Wireless Intelligent Network (WIN)) are used instead of wireline protocols (e.g., AIN).

The foregoing disclosure of embodiments of the present invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many variations and modifications of the embodiments described herein will be obvious to one of ordinary skill in the art in light of the above disclosure. The scope of the invention is to be defined only by the claims appended hereto, and by their equivalents.

What is claimed is:

1. A method for providing a service that delivers the geographic location of a calling party on a VOIP (voice over Internet Protocol) phone, comprising:

receiving a call transmitted from a calling party's IP (Internet Protocol) network to a called party, wherein data associated with the call includes an IP address of the calling party and a directory number corresponding to the IP address;

in response to receiving the call, triggering a query associated with the called party and requesting the geographic location of the calling party;

receiving information returned on a circuit signaling network in response to the request, and including geographic location information associated with the calling party and recorded by a geographic location-tracking network;

terminating the call and delivering the geographic location information to the called party; and

translating the geographic location information from raw form to a displayable form;

wherein if the call is from a mobile device, the geographic location information is recorded after the call originates from the calling party and before the call is received at a network element associated with the called party; and wherein the geographic location information includes a building name.

2. The method of claim 1, wherein if the call is from a stationary geographic location, the geographic location information is recorded during the calling party's service activation; and

wherein delivering the geographic location information to the called party comprises providing the geographic location information of the calling party in relation to a landmark.

3. The method of claim 1, wherein if the call is from the mobile device, before the call is received at the network element associated with the called party means before the call is received at a central office associated with the called party.

4. The method of claim 3, wherein the geographic location information is recorded using a geographic location system to determine a current geographic location of the mobile device.

5. The method of claim 4, wherein the current geographic location is in raw format, and further comprising translating the current geographic location into a displayable form.

6. The method of claim 1, wherein the geographic location information is received in response to searching a database

11

for the calling party's geographic location information using the IP address of the calling party.

7. The method of claim 1, wherein the geographic location information is global positioning system coordinates.

8. The method of claim 1, wherein delivering the geographic location information uses a medium of an audio message.

9. The method of claim 1, wherein a network that tracks geographic locations of network devices provides the location information.

10. The method of claim 9, wherein the network provides enhanced 911 services.

11. A system for delivering location information of a calling party on a VOIP (voice over Internet Protocol) phone associated with an IP (Internet Protocol) address and a directory number corresponding to the IP address, the system comprising:

a location-tracking network storing the calling party's geographic location information in an address database, wherein the address database cross-references geographic location information with directory numbers and corresponding IP addresses associated with VOIP phones;

a control server in communication with the address database;

a mapping converter that translates the geographic location information from raw form to displayable form; and

a called party's network element that receives a call from the calling party, wherein data associated with the call includes the IP address of the calling party,

wherein the control server, in response to a query received from and launched by a trigger at the network element associated with the called party, searches the address database for geographic location information corresponding to the IP address of the calling party, and returns the geographic location information on a circuit signaling network to the called party's network element;

wherein the called party's network element terminates the call and delivers the geographic location information to the called party;

wherein delivering the geographic location information uses a medium of an audio message; and

wherein the geographic location information includes a building name.

12. The system of claim 11, wherein the query is a query for routing instructions, the control server provides routing

12

instructions, and the control server returns routing instructions with the geographic location information to the called party's network element, which forwards the geographic location information to a display unit.

13. The system of claim 12, wherein the routing instructions are in the form of a transaction capability application part response.

14. The system of claim 11, wherein if the calling party is a mobile device, the location-tracking network continually updates the address database with new geographic location information.

15. The system of claim 11, wherein if the calling party is a stationary device, the geographic location-tracking network records the geographic location information of the stationary device upon installation of the stationary device.

16. The system of claim 11, wherein the location-tracking network is a wireless network that supports enhanced 911 services.

17. The system of claim 11, wherein the location-tracking network includes a handheld device location system that provides the geographic location information.

18. The system of claim 17, wherein the handheld device location system is a global positioning system.

19. The system of claim 11, wherein the location-tracking network includes a network-based location system that provides the geographic location information.

20. The system of claim 19, wherein the network-based location system is a Wireless Application Protocol location system.

21. The system of claim 11, wherein the mapping converter is in communication with the control element.

22. The system of claim 11, wherein the mapping converter is in communication with the location-tracking network.

23. The system of claim 11, further comprising a name database cross-referencing calling party names with directory numbers corresponding to IP addresses,

wherein the control server searches the name database for a name corresponding to the directory number, and forwards the name to a display unit, and

wherein the display unit displays the geographic location information and the name.

24. The system of claim 23, wherein the display unit is a calling name display unit.

* * * * *