8454305

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

January 30, 2024

THIS IS TO CERTIFY THAT ANNEXED IS A TRUE COPY FROM THE RECORDS OF THIS OFFICE OF THE FILE WRAPPER AND CONTENTS OF:

APPLICATION NUMBER: *14/087,169*
FILING DATE: *November 22, 2013*
PATENT NUMBER: *9730484*
ISSUE DATE: *August 15, 2017*

Certified by

Performing the Functions and Duties of the
Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

PTO/AIA/15 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995 no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	51-3770
First Named Inventor	Bhupesh Dua
Title	Article Of Footwear Having A Flat Knit...
Express Mail Label No.	

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☐ **Fee Transmittal Form** (PTO/SB/17 or equivalent)
2. ☐ **Applicant asserts small entity status.** See 37 CFR 1.27
3. ☐ **Applicant certifies micro entity status.** See 37 CFR 1.29. Applicant must attach form PTO/SB/15A or B or equivalent.
4. ☑ **Specification** [*Total Pages* 27] Both the claims and abstract must start on a new page. *(See MPEP § 608.01(a) for information on the preferred arrangement)*
5. ☑ **Drawing(s)** (35 U.S.C. 113) [*Total Sheets* 18]
6. **Inventor's Oath or Declaration** [*Total Pages*] *(including substitute statements under 37 CFR 1.64 and assignments serving as an oath or declaration under 37 CFR 1.63(e))*
   a. ☐ Newly executed (original or copy)
   b. ☐ A copy from a prior application (37 CFR 1.63(d))
7. ☑ **Application Data Sheet** ** See note below.* See 37 CFR 1.76 (PTO/AIA/14 or equivalent)
8. **CD-ROM or CD-R** in duplicate, large table, or Computer Program (*Appendix*)
   ☐ Landscape Table on CD
9. **Nucleotide and/or Amino Acid Sequence Submission** (*if applicable, items a. – c. are required*)
   a. ☐ Computer Readable Form (CRF)
   b. ☐ Specification Sequence Listing on:
      i. ☐ CD-ROM or CD-R (2 copies); or
      ii. ☐ Paper
   c. ☐ Statements verifying identity of above copies

ADDRESS TO:

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

ACCOMPANYING APPLICATION PAPERS

10. ☐ **Assignment Papers** (cover sheet & document(s))
    Name of Assignee NIKE, Inc. for the United States and NIKE International Ltd. for all other states
11. ☐ **37 CFR 3.73(c) Statement** (*when there is an assignee*) ☐ **Power of Attorney**
12. ☐ **English Translation Document** (*if applicable*)
13. ☐ **Information Disclosure Statement** (PTO/SB/08 or PTO-1449)
    ☐ Copies of citations attached
14. ☐ **Preliminary Amendment**
15. ☐ **Return Receipt Postcard** (*MPEP § 503*) (*Should be specifically itemized*)
16. ☐ **Certified Copy of Priority Document(s)** (*if foreign priority is claimed*)
17. ☐ **Nonpublication Request** Under 35 U.S.C. 122(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or equivalent.
18. ☐ **Other:** _____

Note*: (1) Benefit claims under 37 CFR 1.78 and foreign priority claims under 1.55 **must be included in an Application Data Sheet (ADS).
(2) For applications filed under 35 U.S.C. 111, the application must contain an ADS specifying the applicant if the applicant is an assignee, person to whom the inventor is under an obligation to assign, or person who otherwise shows sufficient proprietary interest in the matter. See 37 CFR 1.46(b).

19. CORRESPONDENCE ADDRESS

☑ The address associated with Customer Number: 57618 **OR** ☐ Correspondence address below

Name					
Address					
City		State		Zip Code	
Country		Telephone		Email	

Signature	/Eric M. Gibson/	Date	2013-11-22
Name (Print/Type)	Eric M. Gibson	Registration No. (Attorney/Agent)	59,058

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

ARTICLE OF FOOTWEAR HAVING A FLAT KNIT UPPER CONSTRUCTION OR OTHER UPPER CONSTRUCTION

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a division of U.S. Patent Application Serial Number 13/533,140, entitled "Article of Footwear Having a Flat Knit Upper Construction or Other Upper Construction", filed on June 26, 2012, which application is a continuation of U.S. Patent Application Serial Number 12/829,788, entitled "Article of Footwear Having a Flat Knit Upper Construction or Other Upper Construction", filed on July 2, 2010, and issued as U.S. Patent Number 8,215,132 on July 10, 2012, which application is a divisional of U.S. Patent Application Serial Number 11/558,499, entitled "Article of Footwear Having a Flat Knit Upper Construction or Other Upper Construction", filed on November 10, 2006 and issued as U.S. Patent Number 7,774,956 on May 15, 2008, each naming Bhupesh Dua, et al. as inventors, the disclosures of all of which applications are hereby incorporated by reference in entirety.

BACKGROUND

[0002] Conventional articles of athletic footwear include two primary elements, an upper and a sole structure. The upper provides a covering for the foot that securely receives and positions the foot with respect to the sole structure. In addition, the upper may have a configuration that protects the foot and provides ventilation, thereby cooling the foot and removing perspiration. The sole structure is secured to a lower surface of the upper and is generally positioned between the foot and the ground. In addition to attenuating ground reaction forces, the sole structure may provide traction and control foot motions, such as pronation.

Accordingly, the upper and the sole structure operate cooperatively to provide a comfortable structure that is suited for a wide variety of ambulatory activities, such as walking and running The general features and configuration of the conventional upper are discussed in greater detail below.

[0003] The upper forms a void on the interior of the footwear for receiving the foot. The void has the general shape of the foot, and access to the void is provided by an ankle opening. Accordingly, the upper extends over the instep and toe areas of the foot, along the medial and lateral sides of the foot, and around the heel area of the foot. A lacing system is often incorporated into the upper to selectively increase the size of the ankle opening and permit the wearer to modify certain dimensions of the upper to accommodate feet with varying proportions. In addition, the upper may include a tongue that extends under the lacing system and a heel counter to limit movement of the heel.

[0004] The materials forming the upper may be selected based upon the properties of wear-resistance, flexibility, stretchability, and air-permeability, for example. With regard to the exterior layer, the toe area and the heel area may be formed of leather, synthetic leather, or a rubber material to impart a relatively high degree of wear-resistance. Leather, synthetic leather, and rubber materials, however, may not exhibit the desired degree of flexibility and air-permeability. Accordingly, various other areas of the exterior layer of the upper may be formed from a synthetic or natural textile material. The exterior layer of the upper may be formed, therefore, from numerous material elements that each impart different properties to specific portions of the upper.

[0005] The intermediate layer of the upper may be formed from a lightweight polymer foam material that provides cushioning. Similarly, the interior layer of the upper may be formed of a moisture-wicking textile that removes perspiration from the area immediately surrounding the foot. In some articles of athletic footwear, the various layers may be joined with an adhesive, and stitching may be utilized to join elements within a single layer or to reinforce specific areas of the upper.

[0006] Although the materials selected for the upper vary significantly, textile materials often form at least a portion of the exterior layer and interior layer. A textile may be defined as a structure manufactured from fibers, filaments, or yarns characterized by flexibility, fineness, and a high ratio of length to thickness. Textiles generally fall into two categories. The first category includes textiles produced directly from webs of filaments or fibers by randomly interlocking to construct non-woven fabrics and felts. The second category includes textiles formed through a mechanical manipulation of yarn (e.g., by interlacing or interlooping), thereby producing a woven fabric or a knit fabric, for example.

[0007] Yarn is the raw material utilized to form textiles in the second category. In general, yarn is defined as an assembly having a substantial length and relatively small cross-section that is formed of at least one filament or a plurality of fibers. Fibers have a relatively short length and require spinning or twisting processes to produce a yarn of suitable length for use in textiles. Common examples of fibers are cotton and wool. Filaments, however, have an indefinite length and may merely be combined with other filaments to produce a yarn suitable for use in textiles. Modern filaments include a plurality of synthetic materials such as rayon, nylon, polyester, and polyacrylic, with silk being the primary, naturally-occurring exception. Yarn may be formed of a single filament, which is conventionally referred to as a "monofilament yarn," or a plurality of individual filaments grouped together. Yarn may also include separate filaments formed of different materials, or the yarn may include filaments that are each formed of two or more different materials. Similar concepts also apply to yarns formed from fibers. Accordingly, yarns may have a variety of configurations that generally conform to the definition provided above.

[0008] The various techniques for mechanically manipulating yarn into a textile include interweaving, intertwining and twisting, and interlooping. Interweaving is the intersection of two yarns that cross and interweave at right angles to each other. The yarns utilized in interweaving are conventionally referred to as "warp" and "weft." Intertwining and twisting encompasses procedures such

as braiding and knotting where yarns intertwine with each other to form a textile. Interlooping involves the formation of a plurality of columns of intermeshed loops, with knitting being the most common method of interlooping.

[0009] The textiles utilized in footwear uppers generally provide a lightweight, air-permeable structure that is flexible and comfortably receives the foot. In order to impart other properties to the footwear, including durability and stretch-resistance, additional materials are commonly combined with the textile, including leather, synthetic leather, or rubber, for example. With regard to durability, U.S. Pat. No. 4,447,967 to Zaino discloses an upper formed of a textile material that has a polymer material injected into specific zones to reinforce the zones against abrasion or other forms of wear. Regarding stretch resistance, U.S. Pat. No. 4,813,158 to Brown and U.S. Pat. No. 4,756,098 to Boggia both disclose a substantially inextensible material that is secured to the upper, thereby limiting the degree of stretch in specific portions of the upper. U.S. Patent Publication No. 2006-0048413 describes, inter alia, a rubber/foam web sandwiched between two textile structures to provide support, and this structure also allows for regional breathability, stretchability, and durability.

SUMMARY

[0010] One example structure according to this invention relates to an article of footwear having an upper and a sole structure secured to the upper. The upper includes a knitted element formed from at least one mechanically manipulated yarn. The knitted element of this example structure has an area with a first layer and a coextensive second layer. The first layer is formed as a unitary construction with the second layer, and the second layer is joined to the first layer at opposite sides of the second layer.

[0011] Another example aspect of the invention relates to a method of manufacturing an article of footwear. The method includes steps of flat knitting a textile element and incorporating the textile element into the article of footwear. The step of flat knitting may include forming an area of the textile element with a first layer and a coextensive second layer. The two layers may be utilized to form a channel, for example. In some configurations, the step of flat knitting may include forming a first area and a second area, with one or both of a stitch type and a yarn type of the first area being different than a stitch type and a yarn type of the second area.

[0012] Yet another example structure according to this invention relates to an article of footwear having a knitted element that includes a foot-receiving portion and one or more straps formed of unitary construction with the foot-receiving portion. The foot-receiving portion defines a void for receiving the foot, and the strap or straps extend outward from one or more sides of the foot-receiving portion.

[0013] The advantages and features of novelty characterizing various aspects of the invention are pointed out with particularity in the appended claims. To gain an improved understanding of the advantages and features of novelty, however, reference may be made to the following descriptive matter and accompanying drawings that describe and illustrate various embodiments and concepts related to the aspects of the invention.

DESCRIPTION OF THE DRAWINGS

[0014] FIG. 1 is a lateral side elevational view of an article of footwear having a first upper in accordance with the invention.

[0015] FIG. 2 is a medial side elevational view of the article of footwear.

[0016] FIG. 3 is top plan view of the article of footwear.

[0017] FIGS. 4A-4C are cross-sectional views of the article of footwear, as defined by section lines 4A-4C in FIG. 3.

[0018] FIG. 5 is a plan view of a lateral textile element of the first upper.

[0019] FIG. 6 is a plan view of a medial textile element of the first upper.

[0020] FIG. 7 is a plan view of a central textile element of the first upper.

[0021] FIG. 8A is a perspective view depicting a first step in assembling the article of footwear.

[0022] FIG. 8B is a perspective view depicting a second step in assembling the article of footwear.

[0023] FIG. 8C is a perspective view depicting a third step in assembling the article of footwear.

[0024] FIG. 8D is a perspective view depicting a fourth step in assembling the article of footwear.

[0025] FIG. 8E is a perspective view depicting a fifth step in assembling the article of footwear.

[0026] FIG. 9A is a plan view of another configuration for the lateral textile element.

[0027] FIG. 9B is a plan view of yet another configuration for the lateral textile element.

[0028] FIG. 10A is a perspective view of a textile element of a second upper in accordance with the invention.

[0029] FIG. 10B is a top plan view of the textile element of the second upper.

[0030] FIG. 10C is a side elevational view of the textile element of the second upper.

[0031] FIG. 11A is a perspective view of an article of footwear having a third upper in accordance with the invention.

[0032] FIG. 11B is a side elevational view of the third upper in combination with a foot.

[0033] FIG. 12 is a perspective view of an article of footwear having another upper configuration in accordance with this invention.

[0034] FIG. 13 is a perspective view of an article of footwear having yet another upper configuration in accordance with this invention.

DETAILED DESCRIPTION

[0035] The following discussion and accompanying figures disclose various uppers for articles of footwear, the uppers (or at least portions thereof) being at least partially formed from a material produced through a flat knitting process. The uppers are disclosed in combination with footwear suitable for activities that include running and yoga. Concepts associated with the footwear and the uppers are not limited solely to footwear designed for running and yoga, but they may be applied to a wide range of athletic footwear styles, including baseball shoes, basketball shoes, cross-training shoes, cycling shoes, football shoes, tennis shoes, soccer shoes, walking shoes, and hiking boots, for example. The concepts also may be applied to footwear styles that are generally considered to be non-athletic, including dress shoes, loafers, sandals, and work boots. The concepts disclosed herein apply, therefore, to a wide variety of footwear styles. Also, aspects of this invention may be used in conjunction with other portions of a footwear structure, such as a layer within an upper member structure, an interior lining for a footwear product (such as a sock liner), a bootie member (optionally for inclusion in a footwear structure), etc.

[0036] Flat knitting, when used in example structures according to this invention, can provide various advantages. For example, flat knitting can be used to provide textile structures for use in footwear uppers of a final desired shape such that textile cutting steps can be avoided (which eliminates waste, avoids the need to finish cut edges, saves time, saves money, etc.). Flat knitted elements also can be formed directly in desired three dimensional shapes, which can help avoid the need to use additional support structures in the overall footwear construction (which also saves time, money, etc.; produces a lighter and/or more flexible product; may eliminate seams and at least some sewing, etc.; etc.). By selectively placing multiple different yarns and/or stitch patterns at multiple different locations in the overall structure during the knitting process, flat knitted

products may have multiple different physical properties (e.g., different stretchability, different moisture management capabilities, etc.) at multiple different locations or zones within a single, unitary construction (e.g., different properties at different zones or locations within a single footwear structure). Additionally, flat knitting can be used to produce pockets, tunnels, or other layered structures in the final product. These and other features, aspects, and advantages of structures and methods in accordance with examples of this invention will be described in more detail below in conjunction with the various example structures illustrated in FIGS. 1-13.

[0037] General Footwear Structure

[0038] An article of footwear 10 is depicted in FIGS. 1-4C as including a sole structure 20 and an upper 30. For reference purposes, footwear 10 may be divided into three general regions: a forefoot region 11, a midfoot region 12, and a heel region 13, as shown in FIGS. 1 and 2. Footwear 10 also includes a lateral side 14 and a medial side 15. Forefoot region 11 generally includes portions of footwear 10 corresponding with the toes and the joints connecting the metatarsals with the phalanges. Midfoot region 12 generally includes portions of footwear 10 corresponding with the arch area of the foot, and heel region 13 corresponds with rear portions of the foot, including the calcaneus bone. Lateral side 14 and medial side 15 extend through each of regions 11-13 and correspond with opposite sides of footwear 10. Regions 11-13 and sides 14-15 are not intended to demarcate precise areas of footwear 10. Rather, regions 11-13 and sides 14-15 are intended to represent general areas of footwear 10 to aid in the following discussion. In addition to footwear 10, regions 11-13 and sides 14-15 may also be applied to sole structure 20, upper 30, and individual elements thereof.

[0039] Sole structure 20 is secured to upper 30 and extends between the foot and the ground when footwear 10 is worn. In addition to providing traction, sole structure 20 may attenuate ground reaction forces when compressed between the foot and the ground during walking, running, or other ambulatory activities. As depicted in the figures, one suitable configuration for sole structure

20 includes a midsole 21, an outsole 22, and an insole 23. Midsole 21 is secured to a lower surface of upper 30 and is primarily formed from a polymer foam element (e.g., a polyurethane or ethylvinylacetate foam, phylon, phylite, etc.) that imparts the ground reaction force attenuation properties to sole structure 20. Midsole 21 may incorporate a fluid-filled bladder that supplements the ground reaction force attenuation properties. Outsole 22 is secured to a lower surface of midsole 21 and may be formed from textured rubber or other materials that impart a relatively high degree of wear resistance and/or traction properties. Insole 23 is located within upper 30 and is positioned to extend under a lower surface of the foot. Although this configuration for sole structure 20 provides a suitable example for a sole structure that may be used in connection with upper 30, a variety of other conventional or nonconventional configurations for sole structure 20 may also be utilized without departing from this invention.

[0040] Upper 30 defines a void within footwear 10 for receiving and securing the foot relative to sole structure 20. More particularly, the void is shaped to accommodate a foot and extends along the lateral side of the foot, along the medial side of the foot, over the foot, and under the foot. Access to the void is provided by an ankle opening 31 located in at least heel region 13. A lace 32 extends through various lace elements 33 and permits the wearer to modify dimensions of upper 30, thereby accommodating feet with varying proportions. Lace 32 also permits the wearer to loosen upper 30 and facilitate removal of the foot from the void. Lace elements 33 in this example footwear structure 10 are formed from a flexible material, and each has a pair of loops 35 formed on opposite ends of a central section 36, with loops 35 having a configuration that receives lace 32. In addition, upper 30 includes a heel counter 34 that extends around heel region 13 and limits movement of the heel. A wide variety of other lace engaging elements and/or other footwear securing systems may be provided, if desired.

[0041] Textile Elements

[0042] The void in this example footwear structure 10 is primarily defined by a lateral textile element 40, a medial textile element 50, and a central textile element 60. Lateral textile element 40 forms portions of upper 30 corresponding with lateral side 14. Medial textile element 50 forms portions of upper 30 corresponding with medial side 15. In addition, central textile element 60 forms portions of upper 30 extending under the foot, over forward portions of the foot, and around the heel of the foot. Textile elements 40, 50, and 60 extend around the foot and are the primary elements of footwear 10 that make contact with the foot or a sock worn over the foot. In general, and as described in greater detail below, upper 30 is substantially assembled by joining edges of textile elements 40, 50, and 60 to impart a general shape of the void. In addition, assembling upper 30 in this example structure 10 involves incorporating lace 32, lace elements 33, and heel counter 34 into footwear 10.

[0043] Textile elements 40, 50, and 60 are depicted as forming portions of both an exterior surface and an opposite interior surface of footwear 10. In further configurations, textile elements 40, 50, and 60 may form only the exterior surface or only the interior surface (e.g., as an interior liner or bootie for the footwear structure). Textile elements 40, 50, and 60 may also be located between other footwear elements so as to form non-visible or non-exposed portions of footwear 10. In addition, textile elements 40, 50, and 60 are depicted as extending through each of regions 11-13, but they may be limited to a smaller portion of footwear 10.

[0044] Lateral textile element 40 is depicted individually in FIG. 5 and is formed of unitary (i.e., one-piece) construction through a flat knitting process. That is, a flat knitting process is utilized to mechanically manipulate one or more yarns in a manner that forms an upper edge 41, a lower edge 42, a rear edge 43, and four channels 44 in lateral textile element 40. As depicted in the cross-section of FIG. 4B, channels 44 are formed from two at least partially coextensive layers of the material forming lateral textile element 40, and the two layers are formed of unitary (i.e., one piece) construction through the flat knitting process. When viewed

from the side of footwear 10, as in FIG. 1, channels 44 are oriented in a substantially vertical direction or are angled with respect to a vertical direction.

[0045] Medial textile element 50 is depicted individually in FIG. 6 and is similar in shape and configuration to lateral textile element 40. Accordingly, medial textile element 50 is formed of unitary (i.e., one-piece) construction through a flat knitting process. That is, a flat knitting process is utilized to mechanically manipulate one or more yarns in a manner that forms an upper edge 51, a lower edge 52, a rear edge 53, and four channels 54 in medial textile element 50. As depicted in the cross-section of FIG. 4B, channels 54 are formed from two at least partially coextensive layers of the material forming medial textile element 50, and the two layers are formed of unitary (i.e., one piece) construction through the flat knitting process. When viewed from the side of footwear 10, as in FIG. 2, channels 54 are oriented in a substantially vertical direction or are angled with respect to the vertical direction. Channels 54 are, therefore, similar in configuration and orientation to channels 44 of lateral textile element 40.

[0046] Central textile element 60 is depicted individually in FIG. 7 and includes a forward portion 61, a center portion 62, and a rearward portion 63 formed of unitary (i.e., one piece) construction. Forward portion 61 is primarily located in a throat area of footwear 10 (i.e., under lace 32) and has an elongate configuration defined by a lateral edge 64a and a medial edge 64b. As depicted in FIG. 3, and as described in greater detail below, at least a portion of lateral edge 64a is joined to lateral textile element 40 and at least a portion of medial edge 64b is joined to medial textile element 50. Center portion 62 is primarily located adjacent sole structure 20 (i.e., in an area extending under the foot) to form a lower portion of the void within upper 30. Center portion 62 has a shape that approximates a shape of the foot and is defined by a lateral edge 65a and a medial edge 65b. As described in greater detail below, lateral edge 65a is joined to lateral textile element 40 and medial edge 65b is joined to medial textile element 50. Rearward portion 63 is primarily located in heel region 13 and has a generally Y-shaped configuration defined by a lateral edge 66a, a medial edge 66b, and an

ankle edge 66c. As described in greater detail below, lateral edge 66a is joined to lateral textile element 40, medial edge 66b is joined to medial textile element 50, and ankle edge 66c forms a portion of an upper edge of ankle opening 31.

[0047] Flat Knitting and Yarn

[0048] Each of textile elements 40, 50, and 60 may be formed through a flat knitting process. In general, flat knitting is a method for producing knitted material in which the material is turned periodically (i.e., the material is knitted from alternating sides). The two sides (otherwise referred to as "faces") of the material are conventionally designated as the "right side" (i.e., the side that faces outwards, towards the viewer) and the "wrong side" (i.e., the side that faces inwards, away from the viewer). Flat knitting may be contrasted with circular knitting, in which the fabric is always knitted from the same side. Various circular knitting techniques are known, for example, narrow tube circular knitting and wide tube circular knitting. More specific examples of circular knitting techniques are described in U.S. Published Patent Publication No. 2005/0193592, which publication is entirely incorporated herein by reference. In contrast with circular knitting, flat knitting may be more complicated because the same stitch (as seen from the right side) is produced by two different movements when knitted from the right and wrong sides. Accordingly, a knit stitch (as seen from the right side) may be produced by a knit stitch on the right side or by a purl stitch on the wrong side. In flat knitting, the fabric is usually turned after every row. Although flat knitting provides a suitable manner for forming textile elements 40, 50, and 60, other types of knitting may also be utilized, including wide tube circular knitting, narrow tube circular knit jacquard, single knit circular knit jacquard, double knit circular knit jacquard, and warp knit jacquard, for example.

[0049] An advantage of flat knitting over various other types of knitting is that the flat knitting process may be utilized to form generally three-dimensional structures or structures wherein layers of material overlap each other (i.e., are at least partially coextensive) to form loops or other overlapping configurations, as with channels 44 and 54. More particularly, the flat knitting process may make

structures wherein layers are joined to each other such that opposite sides of one layer are formed of unitary construction with the other layer, as with channels 44 and 54. In addition, flat knitting may be utilized to form areas with different types of stitches and areas with different types of yarns. For example, forward portion 61 of central element 60 is depicted as having a ribbed configuration that stretches to a different degree than the non-ribbed configurations of center portion 62 and rearward portion 63. Moreover, textile elements 40 and 50 may be formed from a less stretchable type of stitch than forward portion 61, and the yarn selected for textile elements 40 and 50 may be more wear-resistant than the yarn selected for forward portion 61. As another example, the knit/yarn combination utilized for rearward portion 63 may be selected to impart stretch and recovery to ankle opening 31. Accordingly, the flat knitting process may be utilized to form a generally three-dimensional or overlapping structure having areas with different properties that are produced from combinations of different types of stitches and different types of yarns.

[0050] The flat knitting process may also be utilized to form elements with defined shapes that do not need to be cut from a larger textile element. For example, each of textile elements 40, 50, and 60 may be knitted to have the respective shapes depicted in FIGS. 5-7 without cutting textile elements 40, 50, and 60 from larger textile elements. Unlike textile elements cut from a larger textile element, therefore, the edges of textile elements 40, 50, and 60 do not need to be finished to prevent unraveling. Also this feature reduces waste and saves time and money in the manufacturing process.

[0051] The yarn forming textile elements 40, 50, and 60 may include cotton and wool fibers, natural filaments such as silk, and synthetic filaments that include rayon, nylon, polyester, and acrylic. Other materials also may be used without departing from this invention. The yarn may be a monofilament yarn or a plurality of individual filaments. The yarn may also be formed of separate filaments formed of different materials, or the yarn may be formed of filaments that are each formed of two or more different materials. Similar concepts also apply to yarns

formed from fibers. In order to provide the stretch and recovery properties to upper 30, and particularly textile elements 40, 50, and 60, a yarn that incorporates an elastane fiber may be utilized. Elastane fibers are available from E. I. duPont de Nemours Company under the LYCRA trademark. Such fibers may have the configuration of covered LYCRA® wherein the fiber includes a LYCRA® core that is surrounded by a nylon sheath. One suitable yarn, for example, includes a 70 denier elastane core that is covered with nylon having a 2 ply, 80 denier, 92 filament structure. Other fibers or filaments exhibiting elastic properties may also be utilized.

[0052] The characteristics of the yarn selected for textile elements 40, 50, and 60 depend primarily upon the materials that form the various filaments and fibers. Cotton, for example, provides a soft hand, natural aesthetics, and biodegradability. Elastane fibers, as discussed above, provide substantial stretch and recoverability. Rayon provides drape and moisture absorption. Wool also provides high moisture absorption, in addition to insulating properties. Polytetrafluoroethylene coatings may provide a low friction contact between the textile and the skin. Nylon is a durable and abrasion-resistant material with high strength, and polyester is a hydrophobic material that dries quickly and also provides relatively high durability. The flat filaments of nylon/polyester may provide luster whereas textured filaments may provide bulk and a matte luster. Accordingly, the materials comprising the yarn may be selected to impart a variety of physical properties to textile elements 40, 50, and 60, and the physical properties may include, for example, strength, stretch, support, stiffness, recovery, fit, and form.

[0053] Assembly Process

[0054] A suitable assembly process for footwear 10 is generally depicted in FIGS. 8A-8E. The order of the various steps outlined below is discussed as an example of the manner in which footwear 10 may be assembled. One skilled in the relevant art will recognize, however, that a different order may also be utilized for assembling footwear 10. With reference to FIG. 8A, each of textile elements 40 and 50 are depicted as being stitched or otherwise joined to central textile element

60. More particularly, lower edge 42 of lateral textile element 40 is stitched to lateral edge 65a of center portion 62, and lower edge 52 of medial textile element 50 is stitched to medial edge 65b of center portion 62. A variety of stitch types may be utilized to join edges 42, 52, 65a, and 65b in the manner discussed above. For example, edges 42, 52, 65a, and 65b may abut each other or overlap each other once the stitching is applied. In addition to stitching, edges 42, 52, 65a, and 65b may be joined to each other with an adhesive or with a heat bonding operation. Accordingly, a variety of methods may be utilized to join textile elements 40, 50, and 60. Furthermore, one skilled in the relevant art will recognize that a last having the general shape of the foot may be utilized in joining textile elements 40, 50, and 60 to form upper 30.

[0055] Once lower portions of textile elements 40 and 50 are joined to center portion 62, textile elements 40 and 50 are joined to rearward portion 63, as depicted in FIG. 8B. More particularly, rear edge 43 of lateral textile element 40 is stitched to lateral edge 66a of rearward portion 63, and rear edge 53 of medial textile element 50 is stitched to medial edge 66b of rearward portion 63. With reference to FIG. 8C, the assembly process continues by joining textile elements 40 and 50 to forward portion 61. More particularly, upper edge 41 of lateral textile element 40 is stitched to lateral edge 64a of forward portion 61, and upper edge 51 of medial textile element 50 is stitched to medial edge 64b of forward portion 61.

[0056] At this point in the assembly process, textile elements 40, 50, and 60 are joined to each other to form an interior void shaped to receive the foot. The various other elements of footwear 10 may now be added. With reference to FIG. 8D, lace elements 33 are positioned to extend through channels 44 and 54 and also extend under center portion 62 of central textile element 60. Each of loops 35 are positioned to extend outward from upper portions of channels 44 and 54, and central section 36 of lace elements 33 is positioned under and on the exterior of central textile element 60. As the final steps in this example assembly process, as depicted in FIG. 8E, lace 32 is threaded through lace elements 33, heel counter 34 is adhesively-bonded or otherwise secured to an exterior of upper 30 in heel

region 13, and sole structure 20 is adhesively-bonded or otherwise secured to a lower area of upper 30.

[0057] Additional Configurations

[0058] Footwear 10 provides an example of a suitable configuration of an article of footwear having an upper at least partially formed from a flat knit material structure. With reference to FIG. 9A, another configuration for lateral textile element 40 is depicted as having various lace loops 45 in place of channels 44 and lace elements 33. As discussed above, the flat knitting process may be utilized to form generally three-dimensional structures wherein layers of material overlap each other (i.e., are at least partially coextensive) to form loops or other overlapping configurations, as with channels 44 and 54. Lace loops 45 may be used in place of lace elements 33 to receive portions of lace 32. Although not necessary, lace elements 33 may be formed from a substantially inextensible material. In order to provide lace loops 45 with similar properties, the yarns and stitch selected for lace loops 45 may impart a substantially non-stretch configuration to upper 30 in the area of lace loops 45.

[0059] Yet another configuration for lateral textile element 40 is depicted in FIG. 9B as having a pocket 46 in place of channels 44 and lace elements 33. Pocket 46 has an upper opening and is otherwise closed to permit small items (e.g., a key, identification, or change) to be secured within footwear 10. As with channels 44 and lace loops 45, pocket 46 is formed through the flat knitting process as a unitary construction with the textile element 40. If desired, a flap or other closure element may be provided to help secure items within the pocket 46 (optionally, the flap may be formed as part of the textile element 40 in the flat knitting process (e.g., as a unitary, one-piece structure therewith).

[0060] As another example of a three-dimensional structure formed through a flat knitting process, an upper 70 is depicted in FIGS. 10A-10C. Upper 70 includes a central portion 71, a pair of side portions 72, and eight lace loops 73. Side portions 72 each include a side edge 74, a rear edge 75, and a central edge 76. When assembled into an article of footwear, central portion 71 extends over

the foot, and side portions 72 wrap under the foot. More particularly, side edges 74 are joined to each other (e.g., with stitching) to form a seam that extends under the foot and along a longitudinal length of the foot. In addition, rear edges 75 are joined to each other (e.g., with stitching) to form a seam that extends upward along the heel. In this configuration, central edge 76 may define an opening that permits the foot to enter and exit a void within upper 70. A lace may also extend through lace loops 73 to provide adjustability.

[0061] Whereas side portions 72 are relatively flat in configuration, central portion 71 has a domed shape formed through the flat knitting process. That is, the flat knitting process forms central portion 71 to have a three-dimensional structure that is shaped to extend over the foot. In comparison with side portions 72, which have a non-ribbed type of knit, central portion 71 may be ribbed. In addition to different knit types, different areas may also incorporate different yarns to further vary the properties of upper 70. In addition to providing a three-dimensional structure, therefore, the flat knitting process may be utilized to impart different knit types and yarns to different areas of upper 70, thereby varying the properties of upper 70 in the different areas.

[0062] Another article of footwear 10' is depicted in FIGS. 11A and 11B as including a sole structure 20' and an upper 30'. Whereas footwear 10 includes sole structure 20 that is separate from and attached to upper 30, sole structure 20' of this example is a lower surface of a textile material that forms upper 30'. Accordingly, footwear 10' may be used for activities such as yoga where a minimal sole is acceptable. In other configurations, sole structure 20' may include polymer foam or rubber elements that impart force attenuation and wear resistance. A separate sole structure may be provided for use with upper 30', if desired.

[0063] Upper 30' includes a foot-receiving portion 31' and a pair of straps 32' that extend outward from sides of foot-receiving portion 31'. Foot-receiving portion 31' has the general configuration of a sock that is formed of unitary (i.e., one piece) construction by the flat knitting process. Foot-receiving portion 31' is, therefore, a textile element shaped to extend around the foot, and

foot-receiving portion 31' has an opening 33' for inserting and removing the foot from upper 30'. Straps 32' are each formed of unitary (i.e., one piece) construction with foot-receiving portion 31' and are joined with foot-receiving portion 31' proximal opening 33'. As with foot-receiving portion 31', straps 32' are formed through the flat knitting process. Each of straps 32' in this example structure are tapered from the area where straps 32' are joined with foot-receiving portion 31' to an end portion of straps 32'. That is, the end portions of straps 32' have a lesser width than the portions of straps 32' that are adjacent opening 33'. Straps 32' may each be formed from a single layer of textile material, or each of straps 32' may have a tubular configuration that is effectively formed from two layers of the textile material.

[0064] Straps 32' are utilized to secure footwear 10' to the foot. As such, straps 32' may have a length that ranges, for example, between three inches and twenty-four inches, depending upon the size and intended use of footwear 10'. As depicted, however, straps 32' are approximately six inches in length. Each of straps 32' has an end portion and a fastener 34' that is located at the end portion. Fastener 34' is depicted as corresponding portions of a hook-and-loop fastener, such as VELCRO®, but they may also be snaps, buttons, or other desired fasteners. With reference to FIG. 11B, straps 32' wrap around the ankle such that fastener 34' is utilized to secure the end portions of straps 32' together behind the ankle. Alternately, straps 32' may be tied on the upper surface of the foot or may wrap around the foot to secure footwear 10' to the foot. Accordingly, a variety of methods for securing footwear 10' to the foot may be utilized, depending upon the foot size and preferences of the wearer.

[0065] Whereas upper 30 is formed from three separate textile elements 40, 50, and 60 that are joined through stitching, upper 30' is formed from a single textile element formed of unitary construction. In contrast with upper 30, therefore, upper 30' is free from seams that may contact the foot during use. That is, foot-receiving portion 31' of this example structure 10' is formed to extend around the foot and does not include seams adjacent the foot. Furthermore, the seamless

union of sole structure 20' and upper 30' in this example structure 10' further reduces seams adjacent the foot. Accordingly, the flat knitting process may be utilized to form a seamless footwear component that extends around the foot.

[0066] FIGS. 12 and 13 illustrate additional examples of articles of footwear like the example shown in FIGS. 11A and 11B, but these additional examples have somewhat different straps and/or securing arrangements. In the example article of footwear 100 shown in FIG. 12, the article of footwear 100 includes a sole structure 120 and an upper 130. A separate sole structure 120 may be provided and attached to the upper 130, if desired, or the upper 130 and the sole structure 120 may be provided as a unitary, one-piece construction (e.g., as a flat knit yoga shoe, slipper, bootie, or the like). The upper 130 of this example structure 100 includes a foot-receiving portion 131 that defines an opening 133 through which the wearer's foot may be inserted. This example structure 100 includes a single strap 132 that extends over the wearer's foot to secure the foot in the article of footwear 100. While any desired type of securing system may be provided (e.g., buttons, snaps, hooks, buckles, etc.), in this example structure 100, one portion of a hook-and-loop fastener 134 is provided on the free end of the strap 132, and this portion of the fastener 134 secures to another portion of the hook-and-loop fastener (not shown) provided at the side of the upper 130. The strap 132 may be provided on either the lateral side or the medial side of the upper member 130 without departing from the invention. This strap 132 may be provided as a unitary, one-piece construction with the upper member 130 by a flat knitting process, e.g., in the manner described above in conjunction with the strap 32 of FIGS. 11A and 11B. If desired, the strap 132 (as well as straps 32 described above) may be constructed from a stretchable material, e.g., to enable a snug and secure fit to the wearer's foot.

[0067] FIG. 13 illustrates an example article of footwear 200 having yet another strap/securing arrangement. In this example, parts that are the same or similar to those described in conjunction with FIG. 12 will be labeled with the same reference number (and the corresponding description thereof will be omitted).

Rather than a single strap, in this example, several (e.g., four in the illustrated example) long and relatively thin and flexible straps 232 are provided. If desired, the straps 232 may be sufficiently thin and/or flexible to allow the wearer to tie them together around the foot (e.g., in a bow or a knot, akin to a shoelace), to thereby secure the foot in the article of footwear 200. The straps 232 may be of sufficient length to wrap around the wearer's ankle one or more times, and optionally up the wearer's calf, e.g., in a manner similar to straps provided in conventional ballet slippers and/or Greco Roman type sandals. If desired, rather than tying, fastener elements (such as hook-and-loop fasteners, or the like) may be provided, e.g., in a manner similar to that described above in conjunction with FIGS. 11A through 12.

[0068] Straps 232 may be formed as a unitary, one piece construction with the upper member 130, e.g., during a flat knitting process, like the processes described above in conjunction with FIGS. 11A through 12. Alternatively, if desired, the straps 232 may be separate from the upper member 130 (e.g., like a lace, belt, ribbon, or other strap element), optionally extending through channels formed in the upper member 130, e.g., in a manner similar to the channels 44 and 54 described above in conjunction with FIGS. 1-8E. Other strap and/or fastener arrangements may be provided without departing from this invention.

[0069] While the footwear structures 10', 100, and 200 shown in FIGS. 11A through 13 are illustrated as ballet or yoga type footwear, the described structures and techniques may be used to provide upper members or portions thereof (e.g., liners, bootie elements, etc.) for a wide variety of different footwear products without departing from the invention.

[0070] Conclusion

[0071] As described above, a flat knitting process may be utilized to form a variety of uppers or other structures for inclusion in footwear products. An advantage of flat knitting is that generally three-dimensional structures may be formed. In addition, structures wherein layers of material overlap each other to form loops or other overlapping configurations may be formed. The flat knitting

process may also be utilized to form areas with different properties, e.g., by using combinations of different types of stitches and/or different types of yarns. Accordingly, flat knitting may be utilized to shape an upper and also provide different properties to different areas of the upper.

[0072] The invention is disclosed above and in the accompanying drawings with reference to a variety of embodiments. The purpose served by the disclosure, however, is to provide an example of the various features and concepts related to aspects of the invention, not to limit the scope of aspects of the invention. One skilled in the relevant art will recognize that numerous variations and modifications may be made to the embodiments described above without departing from the scope of the invention, as defined by the appended claims.

WHAT IS CLAIMED IS:

1. An article of footwear comprising an upper including a flat-knitted element formed from at least one yarn mechanically manipulated in a flat-knitting process, the flat-knitted element including a first layer having:

a central portion having a domed, three-dimensional structure configured for extending over the top of a foot;

a first side portion being formed of unitary construction with the central portion and extending from a first side of the central portion; and

a second side portion being formed of unitary construction with the central portion and extending from a second side opposite the first side of the central portion.

2. The article of footwear of claim 1, further comprising a first loop being formed as a second layer of unitary construction with the first layer.

3. The article of footwear of claim 2, wherein the first loop extends outward from the central portion.

4. The article of footwear of claim 2, further comprising eight loops being formed as a second layer of unitary construction with the first layer.

5. The article of footwear of claim 1, wherein the knitted element defines a void for receiving a foot of a wearer.

6. The article of footwear of claim 1, wherein the knitted element defines at least a portion of an exterior surface of the upper, and the knitted element defines at least a portion of a void for receiving a foot of a wearer.

7. The article of footwear of claim 1, wherein the knitted element includes a first area and a second area, the first area including a first type of knit structure, and the second area including a second type of knit structure, the first type being different than the second type.

8. The article of footwear of claim 1, wherein the at least one mechanically manipulated yarn includes a first yarn and a different second yarn, the first yarn being located in a first area of the upper, and the second yarn being located in a second area of the upper.

9. The article of footwear of claim 1, wherein the knitted element forms a defined shape having finished edges during the flat knitting process.

10. An article of footwear comprising an upper including a flat-knitted element formed from at least one yarn mechanically manipulated in a flat-knitting process, the flat-knitted element including a first layer and a second layer,

the first layer including:

a central portion;

a first side portion being formed of unitary construction with the central portion and extending from a first side of the central portion; and

a second side portion being formed of unitary construction with the central portion and extending from a second side opposite the first side of the central portion; and

the second layer being flat-knitted with the first layer at opposite ends of the second layer to form an overlapped loop.

11. The article of footwear of claim 10, wherein the central portion has a domed, three-dimensional structure configured for extending over the top of a foot.

12. A method of manufacturing an article of footwear, the method comprising forming during a flat-knitting process an upper including a flat-knitted element including a first layer having:

a central portion having a domed, three-dimensional structure configured for extending over the top of a foot;

a first side portion being formed of unitary construction with the central portion and extending from a first side of the central portion; and

a second side portion being formed of unitary construction with the central portion and extending from a second side opposite the first side of the central portion.

13. The method recited in claim 12, wherein the flat knitting process includes forming a first area and a second area, a stitch type of the first area being different that a stitch type of the second area.

14. The method recited in claim 12, wherein the flat knitting process includes forming a first area and a second area, a yarn type of the first area being different than a yarn type of the second area.

15. The method recited in claim 12, wherein the flat knitting process includes forming a first area and a second area, a stitch type and a yarn type of the first area being different than a stitch type and a yarn type of the second area.

16. The method recited in claim 12, further comprising assembling the flat-knitted element into an article of footwear.

17. The method recited in claim 16, wherein the assembling includes joining side edges of the first side portion and the second side portion to form a seam extending under a foot and along a longitudinal length of the foot.

18. The method recited in claim 16, wherein the assembling includes joining rear edges of the first side portion and the second side portion to form a seam that extends upward along a heel.

19. The method recited in claim 12, wherein the flat knitting process includes forming a first loop of unitary construction in the textile element.

20. The method recited in claim 19, further comprising extending a lace element through the first loop.

ABSTRACT

Flat knitting allows production of textile structures (e.g., for use in footwear uppers) of a final desired shape such that textile cutting steps can be avoided. Flat knitted elements also can be formed directly in desired three dimensional shapes, which can help avoid the need to use additional support structures (e.g., in footwear construction). By selectively placing multiple different yarns and/or stitch patterns at multiple different locations in the overall structure during the knitting process, flat knitted products may have multiple different physical properties (e.g., different stretchability, different moisture management capabilities, etc.) at multiple different locations or zones within a single, unitary construction (e.g., different properties at different zones or locations within a single footwear structure). Additionally, flat knitting can be used to produce pockets, tunnels, or other layered structures in the final product.

Skechers EX1013-p. 29
Skechers v Nike

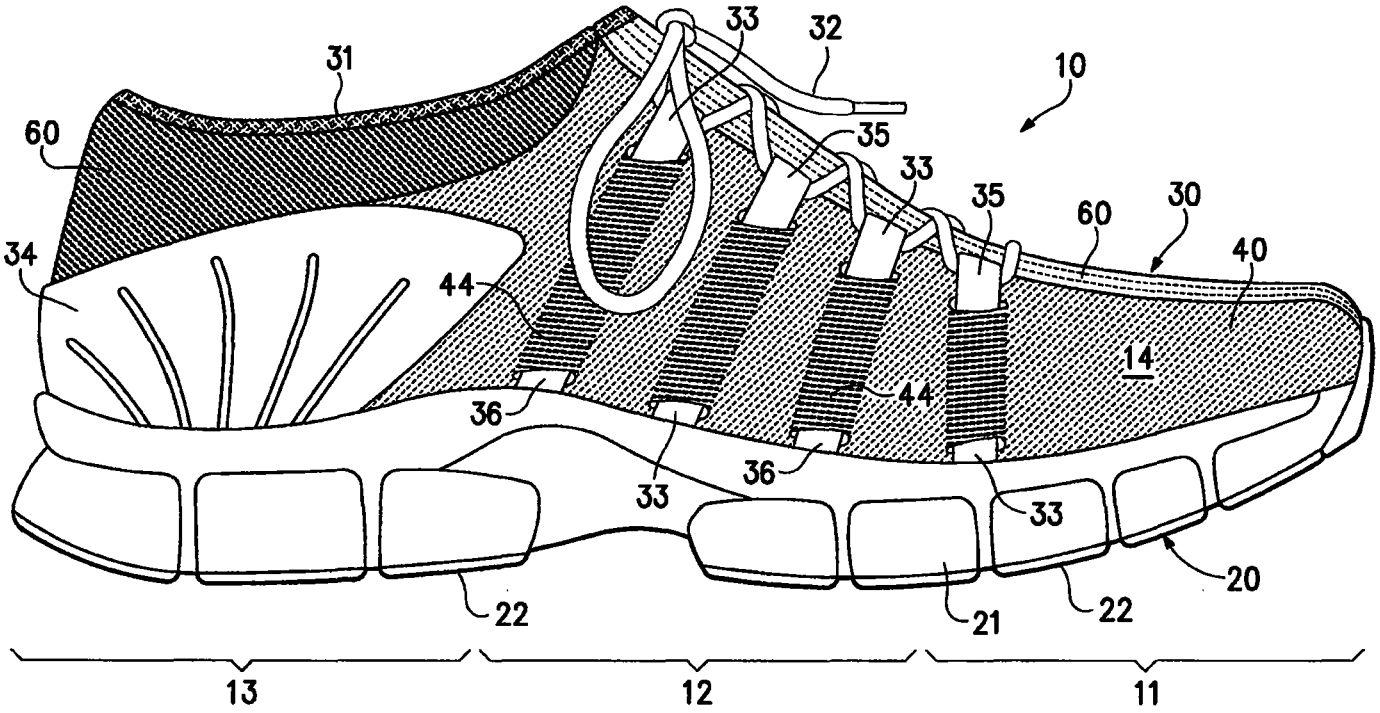

31
33
32
10
60
35
33
35
60
30
34
44
40
14
44
36
36
33
33
20
22
21
22
13
12
11

Figure 1

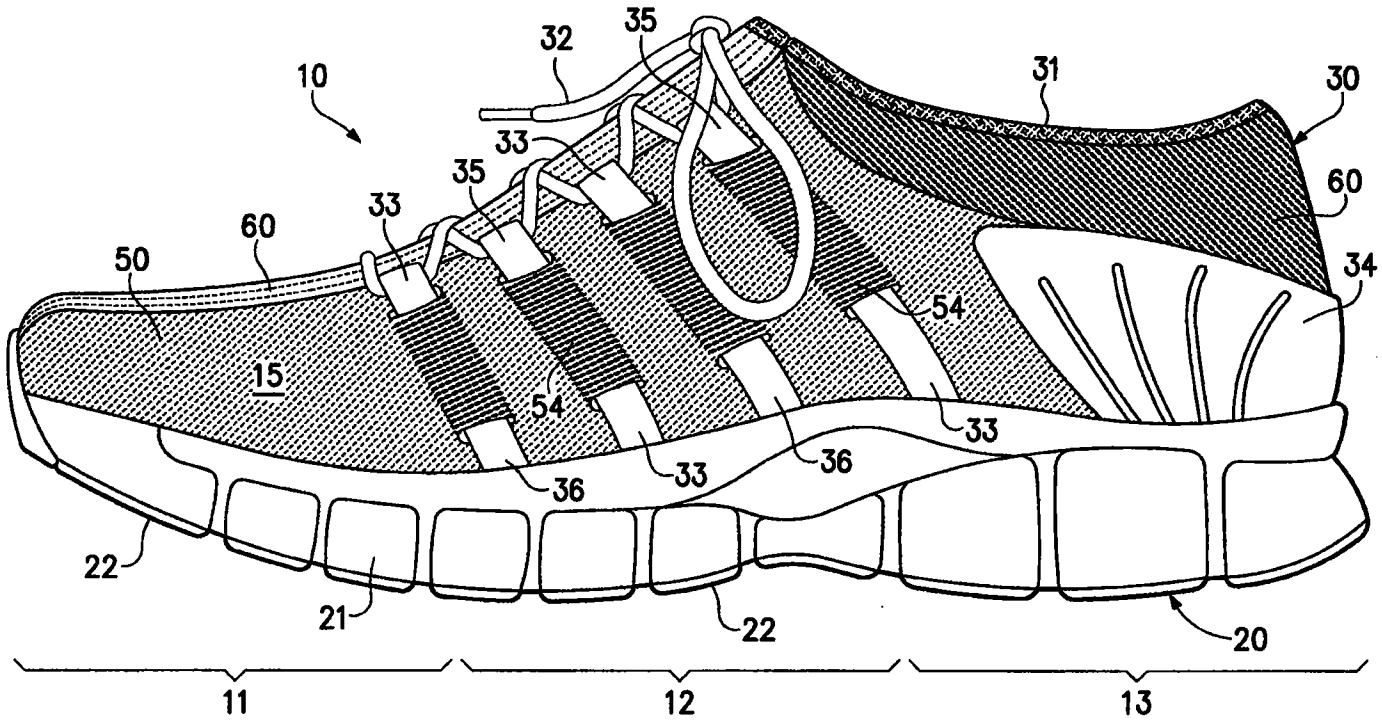

10
32
35
31
30
33
35
60
33
60
50
34
54
15
54
33
36
33
36
22
21
22
20
11
12
13

Figure 2

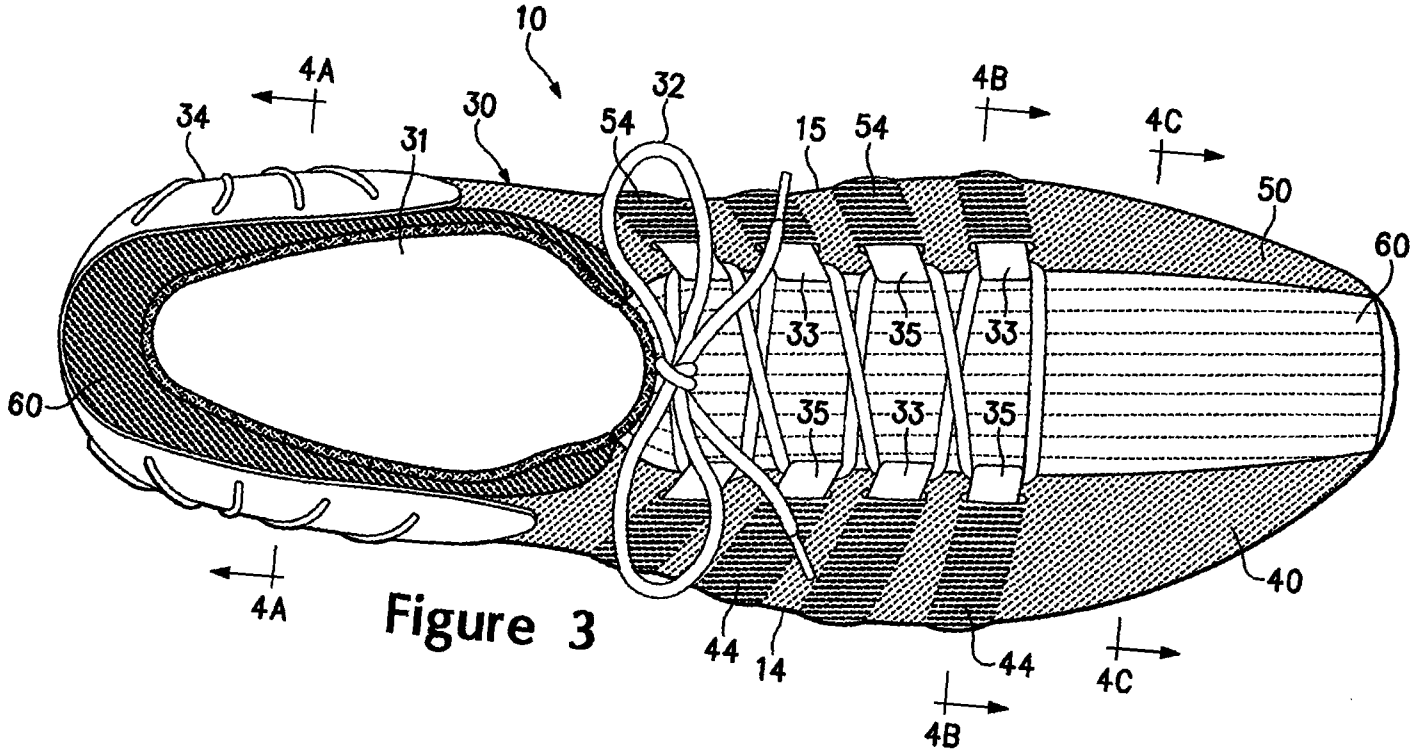

10
4A
34
31
30
54
32
15
54
4B
4C
50
60
33
35
33
60
35
33
35
40
4A
44
14
44
4C
4B

Figure 3

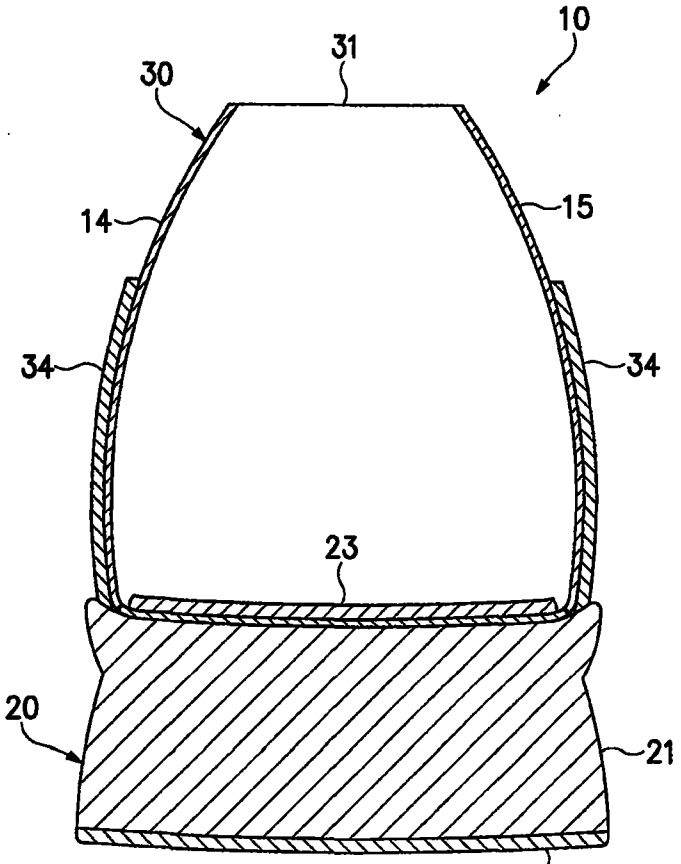


Figure 4A

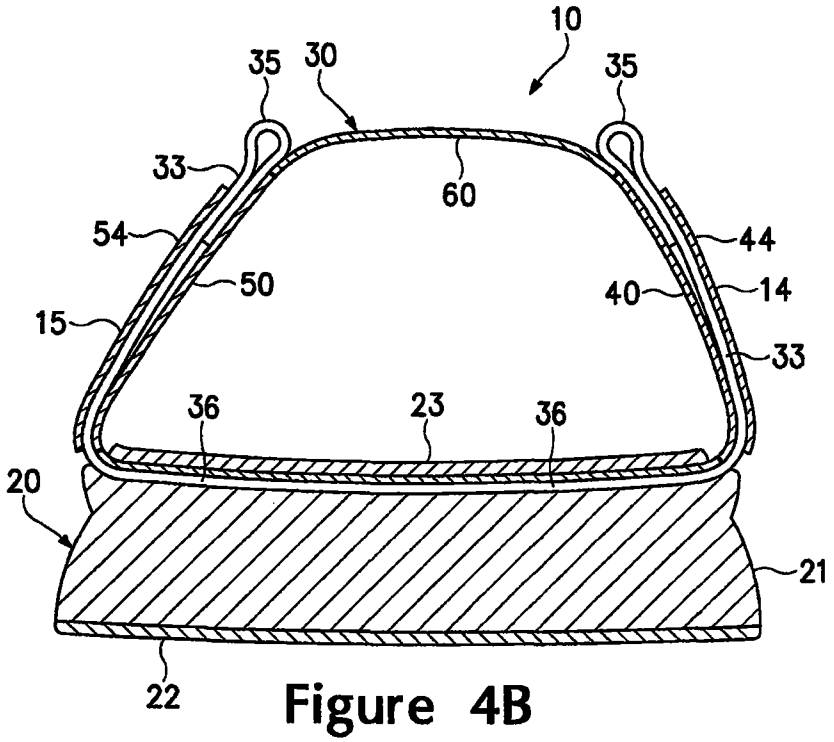


Figure 4B

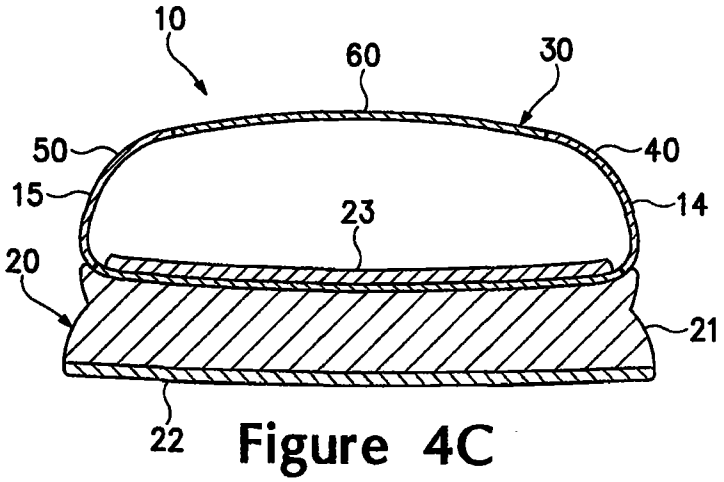


Figure 4C

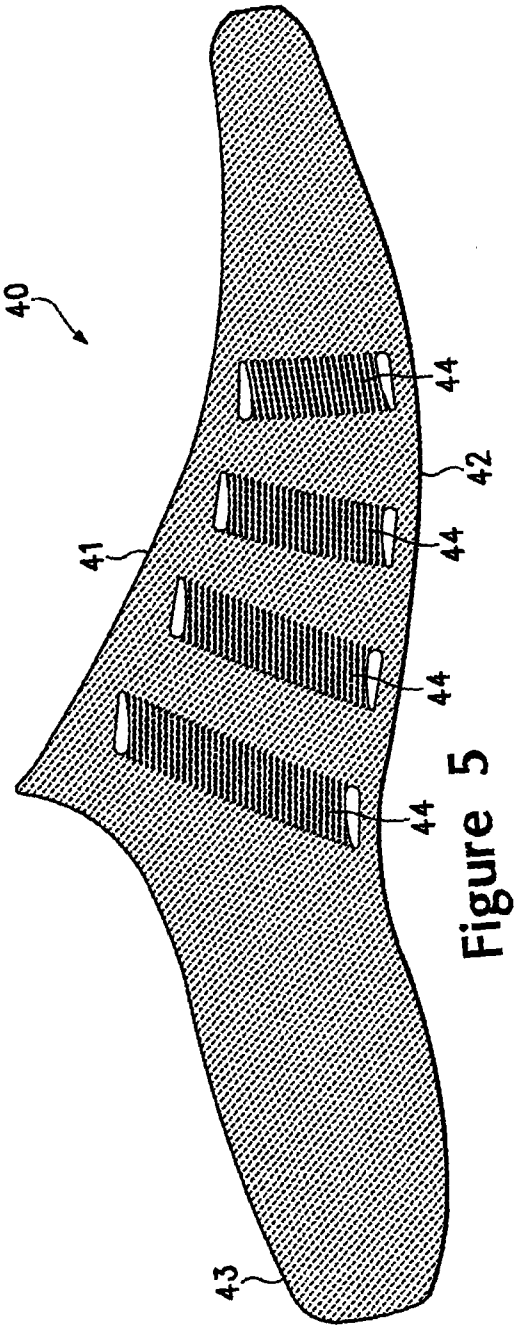


Figure 5

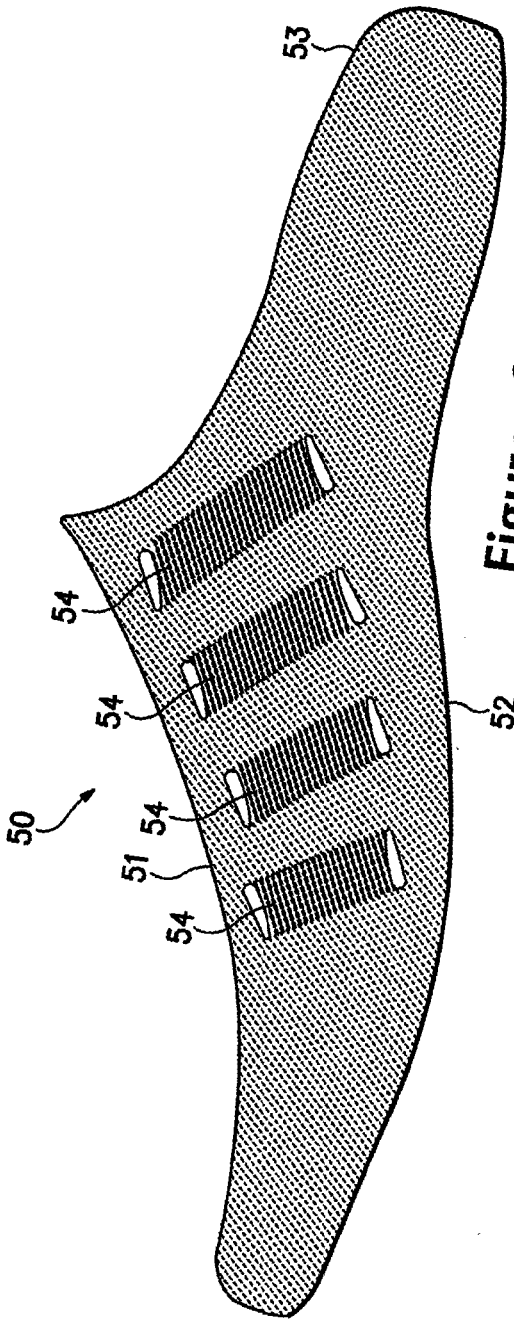


Figure 6

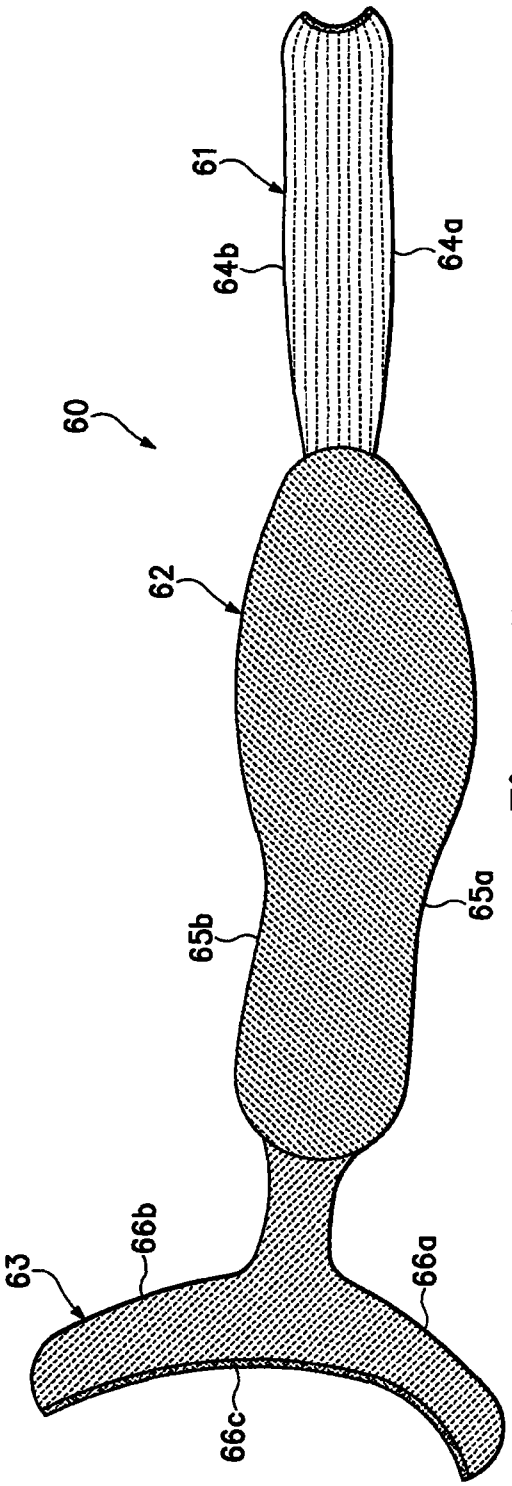


Figure 7

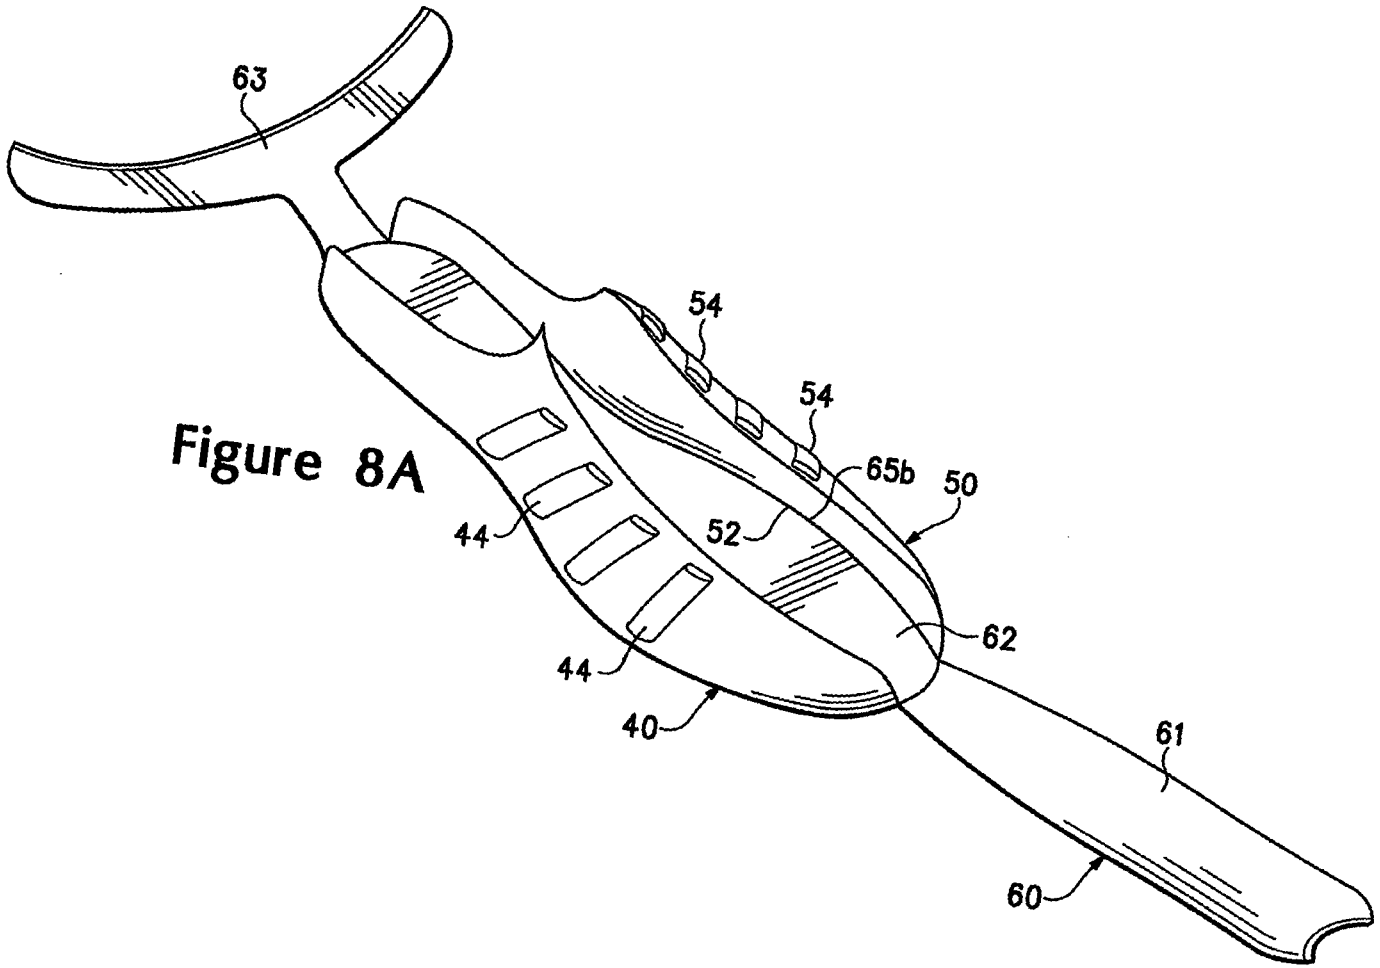


Figure 8A

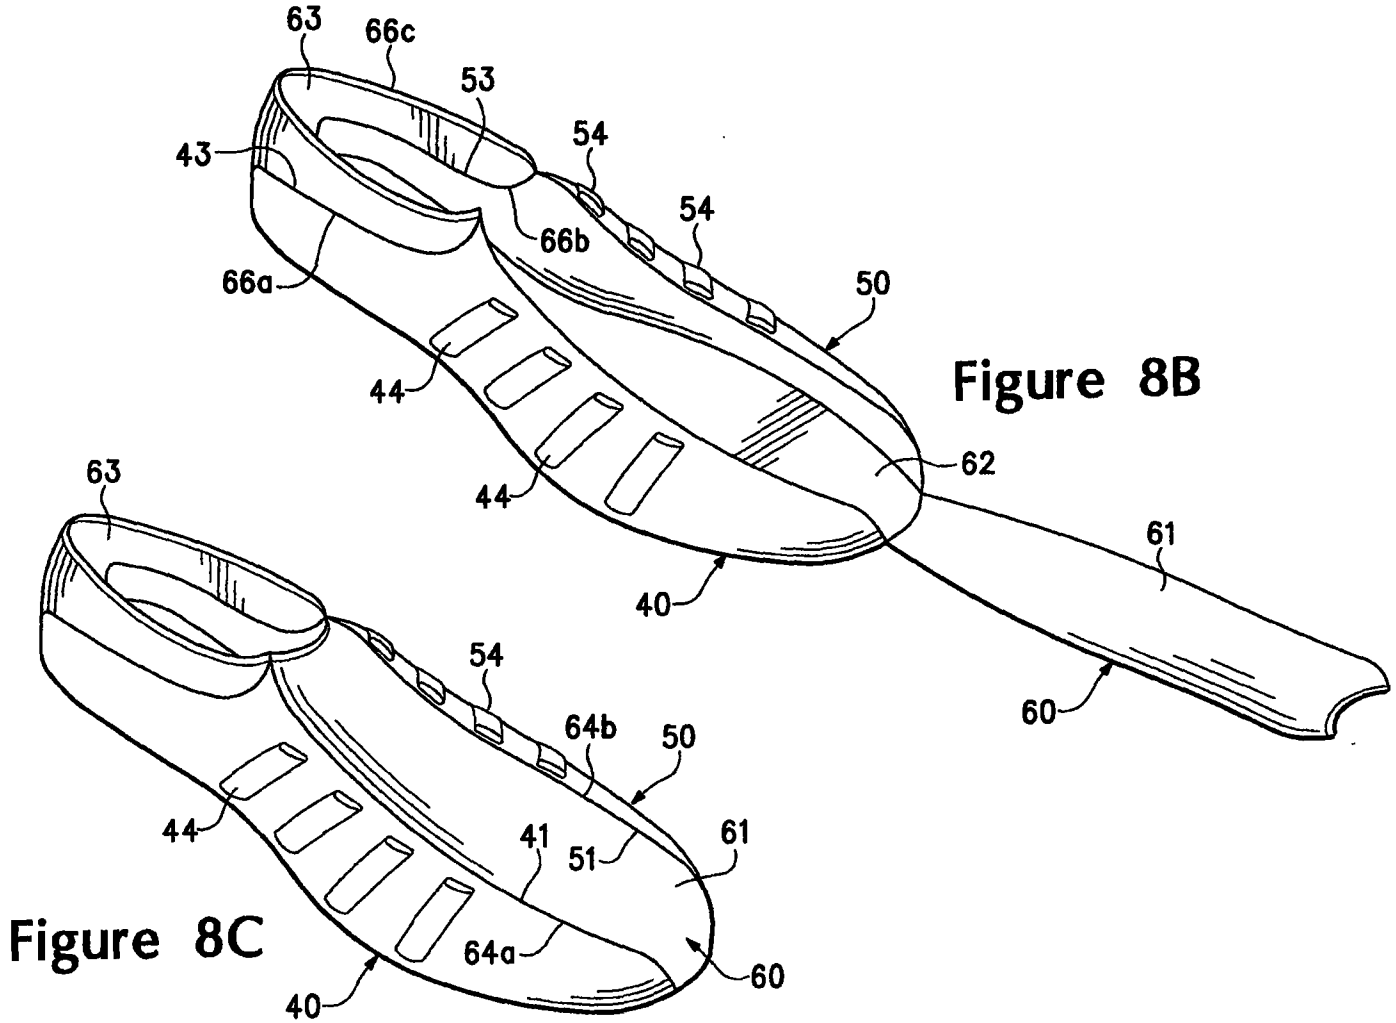


Figure 8B

Figure 8C

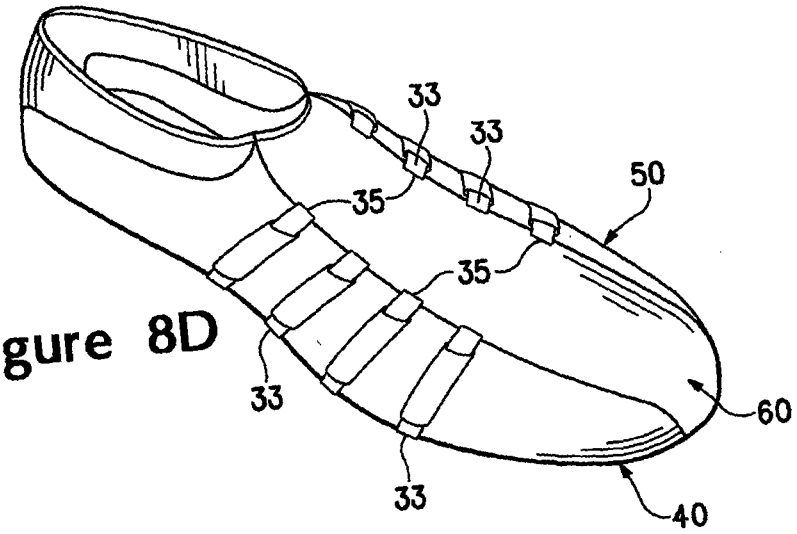


Figure 8D

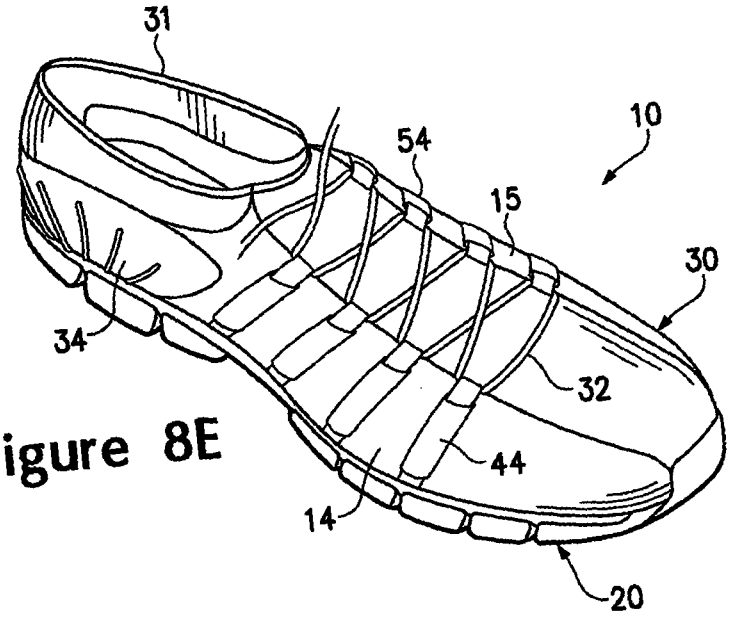


Figure 8E

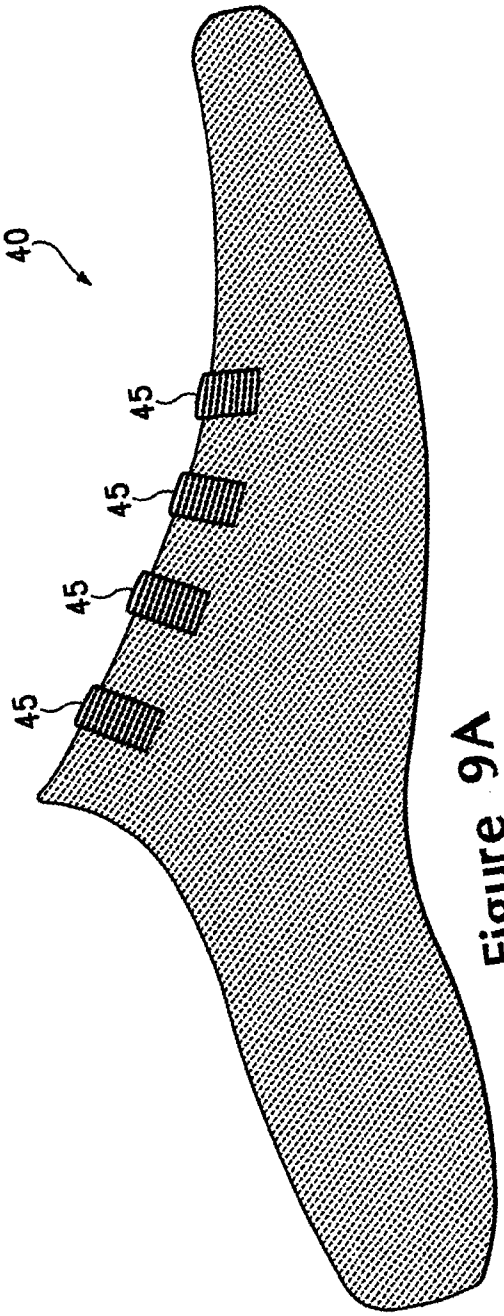


Figure 9A

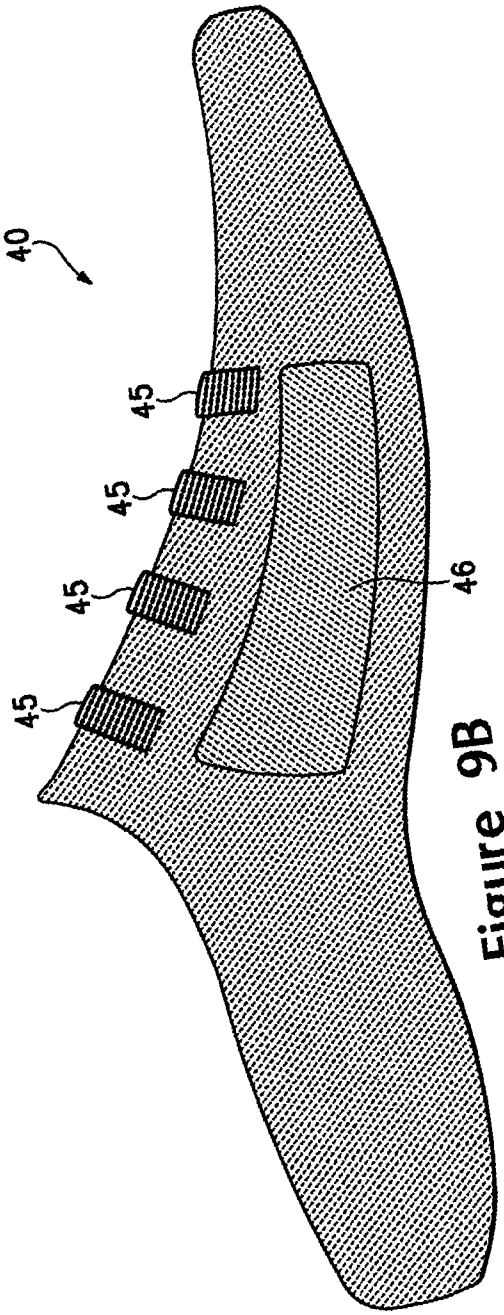


Figure 9B

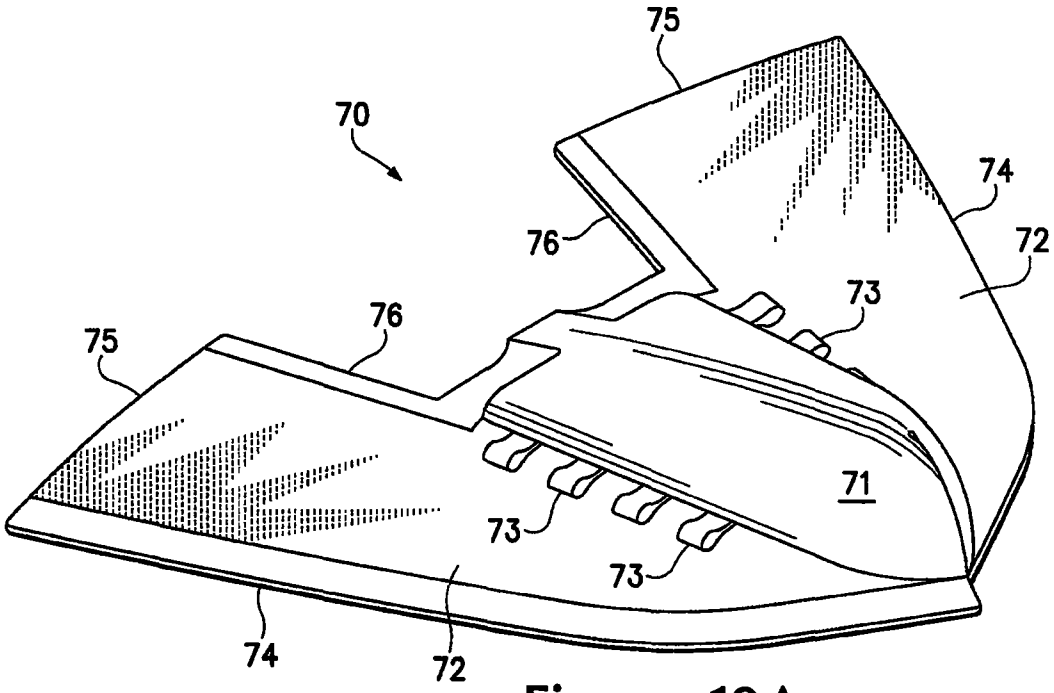


Figure 10A

Skechers EX1013-p. 44
Skechers v Nike

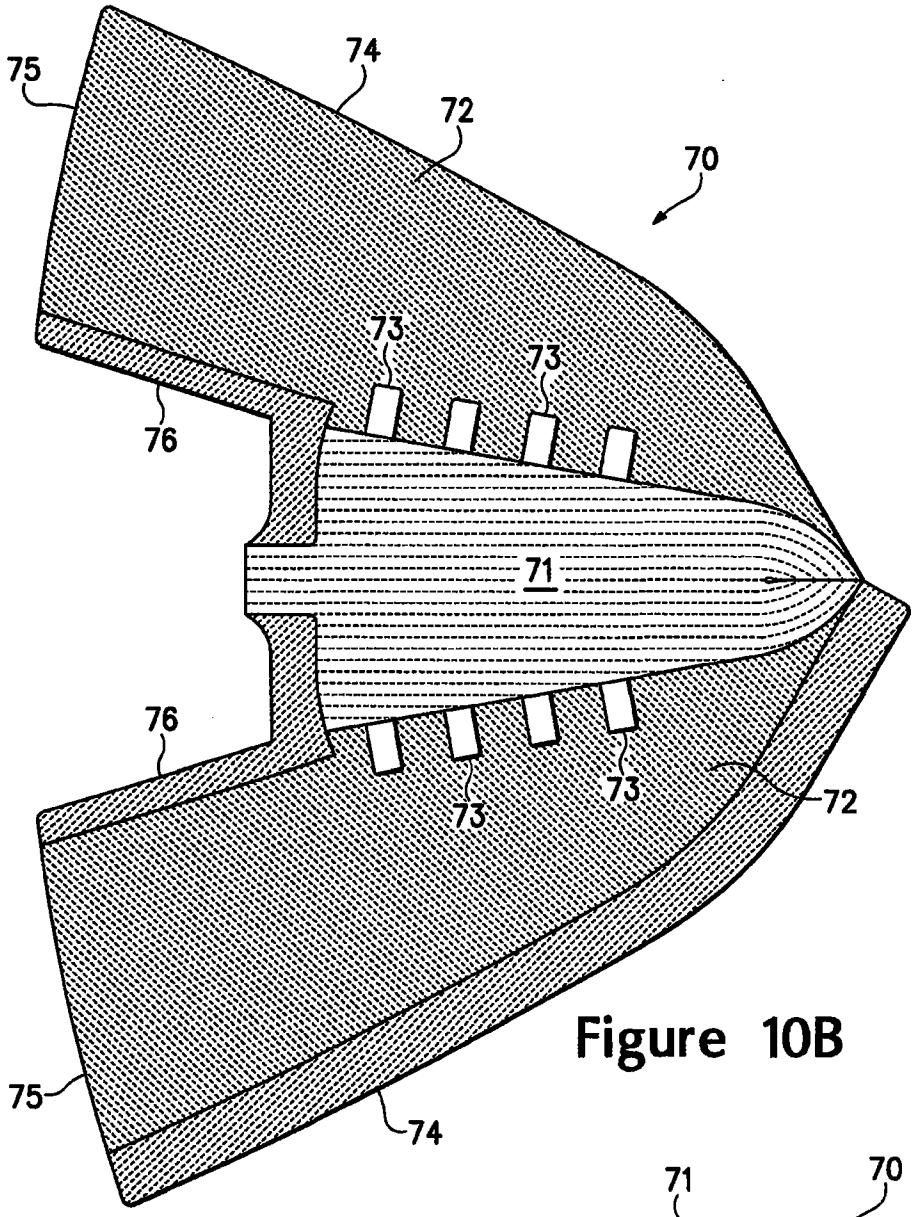


Figure 10B

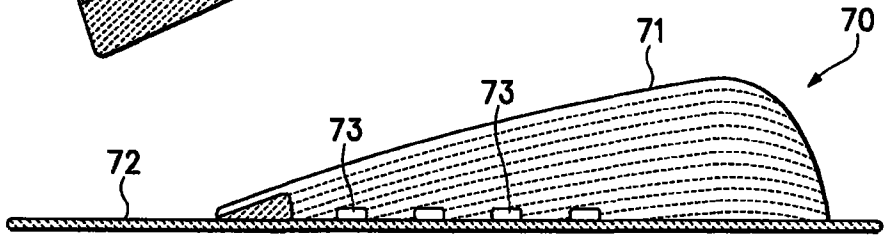


Figure 10C

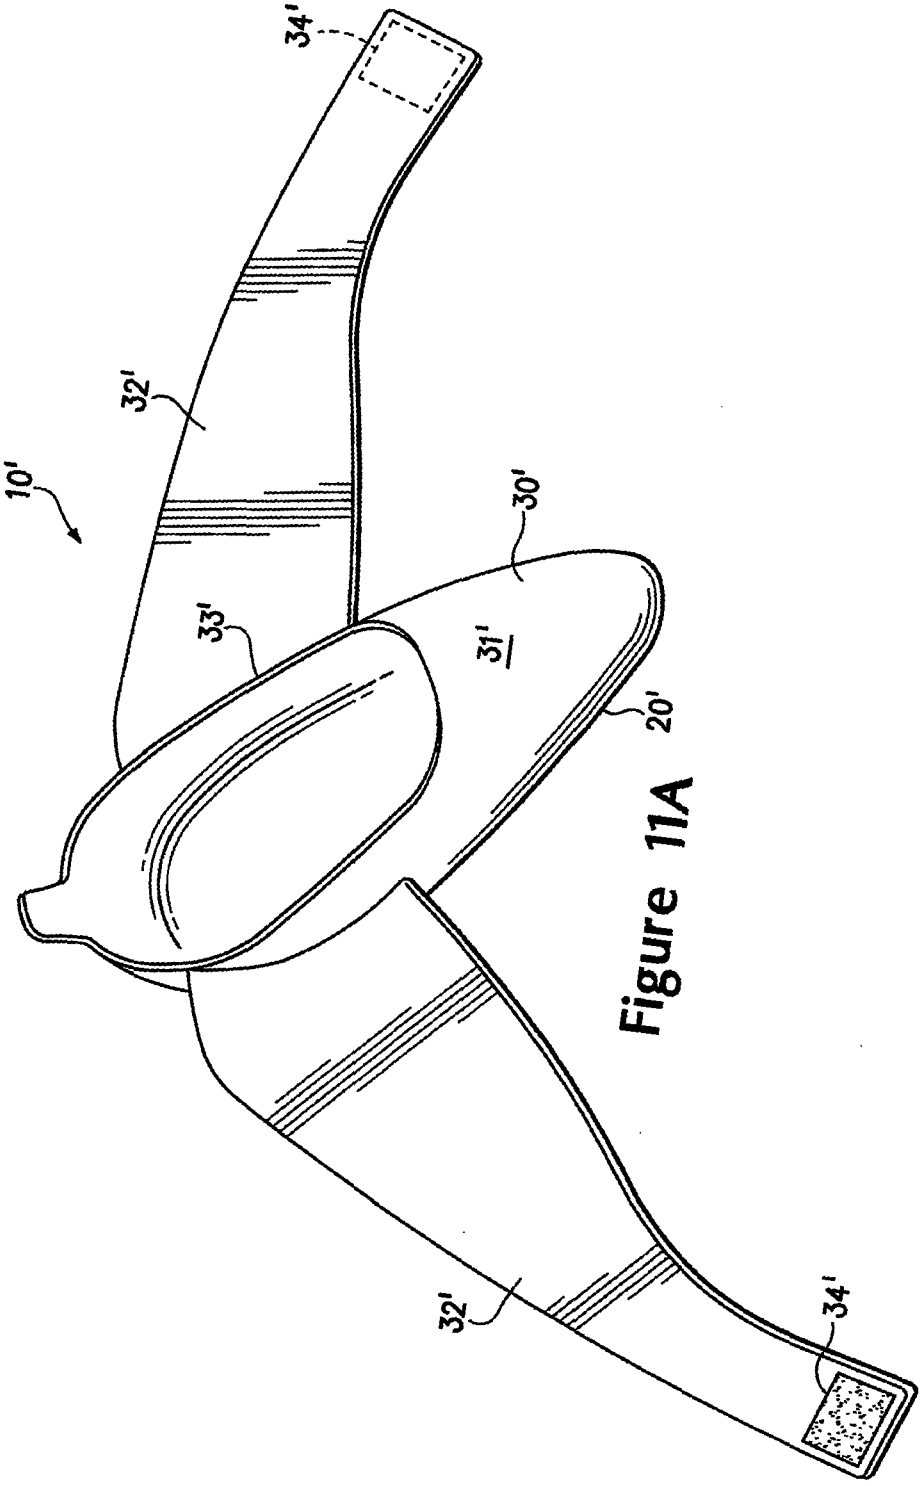


Figure 11A

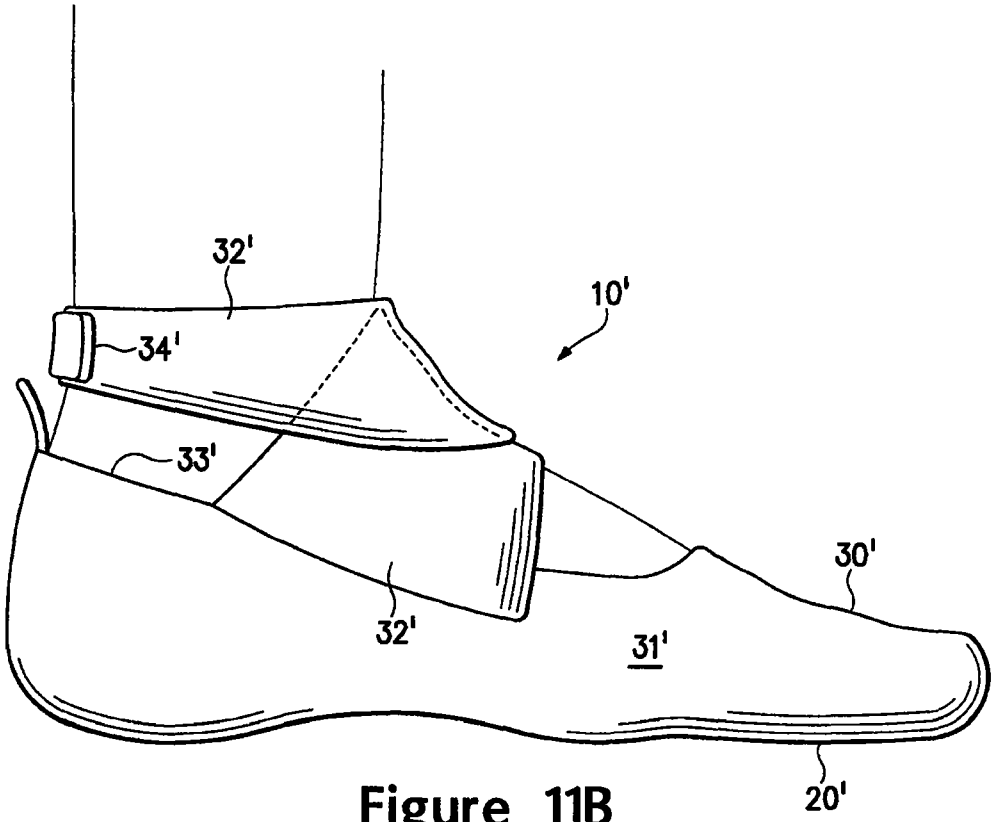


Figure 11B

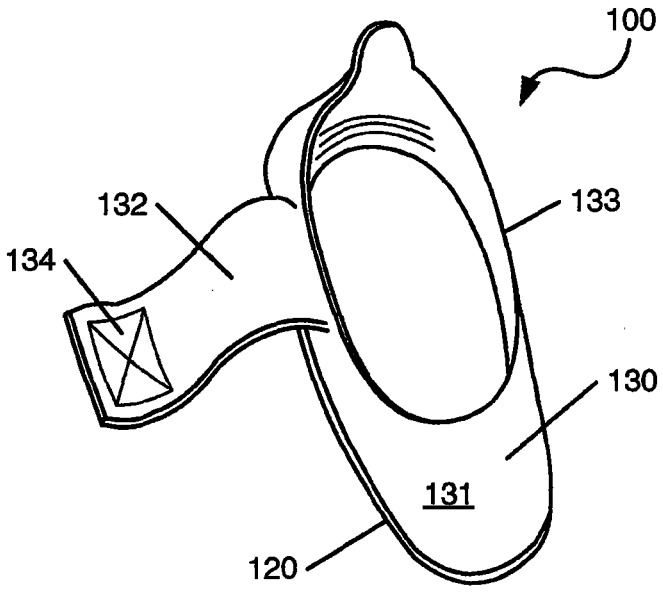


Figure 12

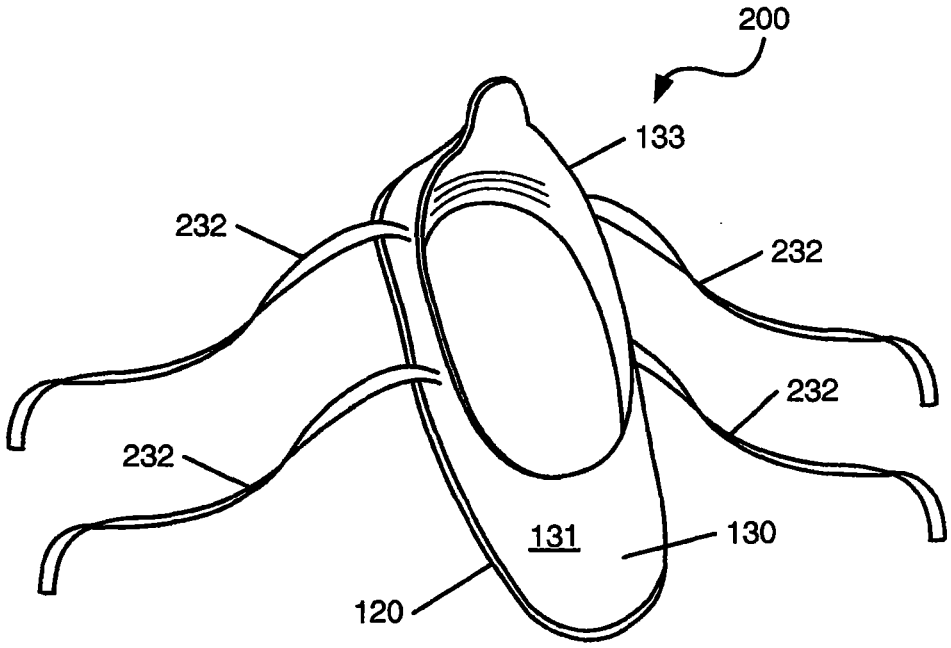


Figure 13

PTO/AIA/14 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	51-3770
	Application Number	
Title of Invention	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction	

The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76.
This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.

Secrecy Order 37 CFR 5.2

☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Inventor Information:

Inventor 1 Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	Bhupesh		Dua	

Residence Information (Select One) ◉ US Residency ○ Non US Residency ○ Active US Military Service

City	Portland	State/Province	OR	Country of Residence	US

Mailing Address of Inventor:

Address 1	c/o NIKE, Inc.		
Address 2	One Bowerman Drive		
City	Beaverton	State/Province	OR
Postal Code	97005	Country	US

Inventor 2 Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	Edward	N.	Thomas	

Residence Information (Select One) ◉ US Residency ○ Non US Residency ○ Active US Military Service

City	Portland	State/Province	OR	Country of Residence	US

Mailing Address of Inventor:

Address 1	c/o NIKE, Inc.		
Address 2	One Bowerman		
City	Beaverton	State/Province	OR
Postal Code	97005	Country	US

All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the **Add** button. Add

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below.
For further information see 37 CFR 1.33(a).

PTO/AIA/14 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	51-3770
	Application Number	
Title of Invention	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction	

☐ **An Address is being provided for the correspondence Information of this application.**			
Customer Number	57618		
Email Address	mail@plumsea.com	Add Email	Remove Email

Application Information:

Title of the Invention	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction		
Attorney Docket Number	51-3770	**Small Entity Status Claimed**	☐
Application Type	Nonprovisional		
Subject Matter	Utility		
Total Number of Drawing Sheets (if any)	18	**Suggested Figure for Publication (if any)**	10A

Publication Information:

☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)
☐ **Request Not to Publish.** I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application **has not and will not** be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32).
Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.

Please Select One:	◉ Customer Number	○ US Patent Practitioner	○ Limited Recognition (37 CFR 11.9)
Customer Number	57618		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78.

Prior Application Status	Pending		Remove
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)
	Division of	13533140	2012-06-26
Prior Application Status	Patented		Remove

PTO/AIA/14 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	51-3770
	Application Number	
Title of Invention	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction	

Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)	Patent Number	Issue Date (YYYY-MM-DD)
13533140	Continuation of	12829788	2010-07-02	8215132	2012-07-10
Prior Application Status	Patented			Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)	Patent Number	Issue Date (YYYY-MM-DD)
11558499	Division of	11558499	2006-11-10	7774956	2008-05-15

Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the **Add** button.

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(d). When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX)[i] the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(h)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

Remove

Application Number	Country[i]	Filing Date (YYYY-MM-DD)	Access Code[i] (if applicable)

Additional Foreign Priority Data may be generated within this form by selecting the **Add** button.

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013.

Authorization to Permit Access:

☒ Authorization to Permit Access to the Instant Application by the Participating Offices

PTO/AIA/14 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	51-3770
	Application Number	
Title of Invention	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction	

If checked, the undersigned hereby grants the USPTO authority to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the World Intellectual Property Office (WIPO), and any other intellectual property offices in which a foreign application claiming priority to the instant patent application is filed access to the instant patent application. See 37 CFR 1.14(c) and (h). This box should not be checked if the applicant does not wish the EPO, JPO, KIPO, WIPO, or other intellectual property office in which a foreign application claiming priority to the instant patent application is filed to have access to the instant patent application.

In accordance with 37 CFR 1.14(h)(3), access will be provided to a copy of the instant patent application with respect to: 1) the instant patent application-as-filed; 2) any foreign application to which the instant patent application claims priority under 35 U.S.C. 119(a)-(d) if a copy of the foreign application that satisfies the certified copy requirement of 37 CFR 1.55 has been filed in the instant patent application; and 3) any U.S. application-as-filed from which benefit is sought in the instant patent application.

In accordance with 37 CFR 1.14(c), access may be provided to information concerning the date o f filing this Authorization.

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Applicant 1

If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.

Clear

◉ Assignee	○ Legal Representative under 35 U.S.C. 117	○ Joint Inventor
○ Person to whom the inventor is obligated to assign.	○ Person who shows sufficient proprietary interest	

If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:

Name of the Deceased or Legally Incapacitated Inventor :

If the Applicant is an Organization check here. ☒

Organization Name	NIKE, Inc.

Mailing Address Information For Applicant:

Address 1	One Bowerman Drive		
Address 2			
City	Beaverton	**State/Province**	OR
Country	US	Postal Code	97005
Phone Number		Fax Number	

PTO/AIA/14 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	51-3770
	Application Number	
Title of Invention	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction	

Email Address	

Additional Applicant Data may be generated within this form by selecting the Add button.

Non-Applicant Assignee Information:

Providing assignment information in this section does not subsitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Assignee 1

Complete this section only if non-applicant assignee information is desired to be included on the patent application publication in accordance with 37 CFR 1.215(b). Do not include in this section an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest), as the patent application publication will include the name of the applicant(s).

If the Assignee is an Organization check here. ☐

Prefix	**Given Name**	Middle Name	**Family Name**	Suffix

Mailing Address Information For Non-Applicant Assignee:

Address 1			
Address 2			
City		**State/Province**	
Country i		Postal Code	
Phone Number		Fax Number	
Email Address			

Additional Assignee Data may be generated within this form by selecting the Add button.

Signature:

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Signature	/Eric M. Gibson/			Date (YYYY-MM-DD)	2013-11-22
First Name	Eric M.	Last Name	Gibson	Registration Number	59058

Additional Signature may be generated within this form by selecting the Add button.

PTO/AIA/14 (03-13)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	51-3770
	Application Number	
Title of Invention	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction	

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Electronic Acknowledgement Receipt

EFS ID:	17476689
Application Number:	14087169
International Application Number:	
Confirmation Number:	5123
Title of Invention:	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction
First Named Inventor/Applicant Name:	Bhupesh Dua
Customer Number:	57618
Filer:	Eric M. Gibson/Cathy Lee
Filer Authorized By:	Eric M. Gibson
Attorney Docket Number:	51-3770
Receipt Date:	22-NOV-2013
Filing Date:	
Time Stamp:	11:59:49
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Transmittal of New Application	2013-11-22_51-3770_Transmittal.pdf	69681 bbcb9daea115fd841718bc197036473c16607204	no	1

Warnings:

Information:

2		2013-11-22_51-3770_Specification.pdf	148083 e0fe0549dd719d83acc20486c1c3981af36bf505	yes	27

Multipart Description/PDF files in .zip description		
Document Description	**Start**	**End**
Specification	1	22
Claims	23	26
Abstract	27	27

Warnings:

Information:

3	Drawings-only black and white line drawings	2013-11-22_51-3770_Drawings.pdf	512321 8e183637b8d8c6e94d391b3f5d97f47f4ab00d46	no	18

Warnings:

Information:

4	Application Data Sheet	2013-11-22_51-3770_ADS.pdf	58258 3af7a724d80204f8279dd2d194475bab09c165c6	no	6

Warnings:

Information:

This is not an USPTO supplied ADS fillable form

Total Files Size (in bytes):	788343

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PATENT APPLICATION FEE DETERMINATION RECORD

Substitute for Form PTO-875

Application or Docket Number: 14/087,169

APPLICATION AS FILED - PART I

FOR	(Column 1) NUMBER FILED	(Column 2) NUMBER EXTRA	SMALL ENTITY RATE($)	SMALL ENTITY FEE($)	OR	OTHER THAN SMALL ENTITY RATE($)	OTHER THAN SMALL ENTITY FEE($)
BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A	N/A			N/A	280
SEARCH FEE (37 CFR 1.16(k), (i), or (m))	N/A	N/A	N/A			N/A	600
EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A	N/A			N/A	720
TOTAL CLAIMS (37 CFR 1.16(i))	20 minus 20 =	*			OR	x 80 =	0.00
INDEPENDENT CLAIMS (37 CFR 1.16(h))	3 minus 3 =	*				x 420 =	0.00
APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is $310 ($155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).						0.00
MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))							0.00
* If the difference in column 1 is less than zero, enter "0" in column 2.			TOTAL			TOTAL	1600

APPLICATION AS AMENDED - PART II

		(Column 1) CLAIMS REMAINING AFTER AMENDMENT		(Column 2) HIGHEST NUMBER PREVIOUSLY PAID FOR	(Column 3) PRESENT EXTRA	SMALL ENTITY RATE($)	SMALL ENTITY ADDITIONAL FEE($)	OR	OTHER THAN SMALL ENTITY RATE($)	OTHER THAN SMALL ENTITY ADDITIONAL FEE($)
AMENDMENT A	Total (37 CFR 1.16(i))	*	Minus	**	=	x =		OR	x =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=	x =		OR	x =	
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							OR		
						TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	

		(Column 1) CLAIMS REMAINING AFTER AMENDMENT		(Column 2) HIGHEST NUMBER PREVIOUSLY PAID FOR	(Column 3) PRESENT EXTRA	RATE($)	ADDITIONAL FEE($)		RATE($)	ADDITIONAL FEE($)
AMENDMENT B	Total (37 CFR 1.16(i))	*	Minus	**	=	x =		OR	x =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=	x =		OR	x =	
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							OR		
						TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	

* If the entry in column 1 is less than the entry in column 2, write "0" in column 3.

** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".

*** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".

The "Highest Number Previously Paid For" (Total or Independent) is the highest found in the appropriate box in column 1.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY.DOCKET.NO	TOT CLAIMS	IND CLAIMS
14/087,169	11/22/2013	3765	0.00	51-3770	20	3

CONFIRMATION NO. 5123

57618
PLUMSEA LAW GROUP, LLC
10411 MOTOR CITY DRIVE
SUITE 320
BETHESDA, MD 20817

FILING RECEIPT



Date Mailed: 12/12/2013

Receipt is acknowledged of this non-provisional patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Inventor(s)

Bhupesh Dua, Portland, OR;
Edward N. Thomas, Portland, OR;

Applicant(s)

NIKE, Inc., Beaverton, OR

Assignment For Published Patent Application

NIKE, Inc., Beaverton, OR

Power of Attorney: None

Domestic Priority data as claimed by applicant

This application is a DIV of 13/533,140 06/26/2012
which is a CON of 12/829,788 07/02/2010 PAT 8215132
which is a DIV of 11/558,499 11/10/2006 PAT 7774956

Foreign Applications for which priority is claimed (You may be eligible to benefit from the **Patent Prosecution Highway** program at the USPTO. Please see http://www.uspto.gov for more information.) - None.
Foreign application information must be provided in an Application Data Sheet in order to constitute a claim to foreign priority. See 37 CFR 1.55 and 1.76.

Permission to Access - A proper **Authorization to Permit Access to Application by Participating Offices** (PTO/SB/39 or its equivalent) has been received by the USPTO.

If Required, Foreign Filing License Granted: 12/05/2013
The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 14/087,169**

Projected Publication Date: To Be Determined - pending completion of Missing Parts

Non-Publication Request: No

Early Publication Request: No

Title

Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction

Preliminary Class

036

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications: No

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at http://www.uspto.gov/web/offices/pac/doc/general/index.html.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, http://www.stopfakes.gov. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4258).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign AssetsControl, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The U.S. offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to promote and facilitate business investment. SelectUSA provides information assistance to the international investor community; serves as an ombudsman for existing and potential investors; advocates on behalf of U.S. cities, states, and regions competing for global investment; and counsels U.S. economic development organizations on investment attraction best practices. To learn more about why the United States is the best country in the world to develop technology, manufacture products, deliver services, and grow your business, visit http://www.SelectUSA.gov or call +1-202-482-6800.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
14/087,169	11/22/2013	Bhupesh Dua	51-3770

CONFIRMATION NO. 5123

57618
PLUMSEA LAW GROUP, LLC
10411 MOTOR CITY DRIVE
SUITE 320
BETHESDA, MD 20817

FORMALITIES LETTER

OC000000065404420

Date Mailed: 12/12/2013

NOTICE TO FILE MISSING PARTS OF NONPROVISIONAL APPLICATION

FILED UNDER 37 CFR 1.53(b)

Filing Date Granted

Items Required To Avoid Abandonment:

An application number and filing date have been accorded to this application. The item(s) indicated below, however, are missing. Applicant is given **TWO MONTHS** from the date of this Notice within which to file all required items below to avoid abandonment. Extensions of time may be obtained by filing a petition accompanied by the extension fee under the provisions of 37 CFR 1.136(a).

- The statutory basic filing fee is missing.
  *Applicant must submit $**280** to complete the basic filing fee for an undiscounted entity. If appropriate, applicant may make a written assertion of entitlement to small entity status and pay the small entity filing fee (37 CFR 1.27) or make a certification of entitlement to micro entity status and pay the micro entity filing fee (37 CFR 1.29).*

The applicant needs to satisfy supplemental fees problems indicated below.

The required item(s) identified below must be timely submitted to avoid abandonment:

- A surcharge (for late submission of the basic filing fee, search fee, examination fee or inventor's oath or declaration) as set forth in 37 CFR 1.16(f) of $ **140** for an undiscounted entity, must be submitted.

SUMMARY OF FEES DUE:

Total fee(s) required within **TWO MONTHS** from the date of this Notice is $ **1740** for an undiscounted entity
- $ **280** Statutory basic filing fee.
- $ **140** Surcharge.
- The application search fee has not been paid. Applicant must submit $ **600** to complete the search fee.
- The application examination fee has not been paid. Applicant must submit $ **720** to complete the examination fee for an undiscounted entity.

Items Required To Avoid Processing Delays:

Applicant is notified that the above-identified application contains the deficiencies noted below. No period for reply is set forth in this notice for correction of these deficiencies. However, if a deficiency relates to the inventor's oath or declaration, the applicant must file an oath or declaration in compliance with 37 CFR 1.63, or a substitute

statement in compliance with 37 CFR 1.64, executed by or with respect to each actual inventor no later than the expiration of the time period set in the "Notice of Allowability" to avoid abandonment. See 37 CFR 1.53(f).

- A properly executed inventor's oath or declaration has not been received for the following inventor(s):
  Bhupesh Dua
  Edward N. Thomas
  Applicant may submit the inventor's oath or declaration at any time before the Notice of Allowance and Fee(s) Due, PTOL-85, is mailed.

Replies must be received in the USPTO within the set time period or must include a proper Certificate of Mailing or Transmission under 37 CFR 1.8 with a mailing or transmission date within the set time period. For more information and a suggested format, see Form PTO/SB/92 and MPEP 512.

Replies should be mailed to:

Mail Stop Missing Parts
Commissioner for Patents
P.O. Box 1450
Alexandria VA 22313-1450

Registered users of EFS-Web may alternatively submit their reply to this notice via EFS-Web.
https://sportal.uspto.gov/authenticate/AuthenticateUserLocalEPF.html

For more information about EFS-Web please call the USPTO Electronic Business Center at **1-866-217-9197** or visit our website at http://www.uspto.gov/ebc.

If you are not using EFS-Web to submit your reply, you must include a copy of this notice.

/ctuazon/

Office of Data Management, Application Assistance Unit (571) 272-4000, or (571) 272-4200, or 1-888-786-0101

JLE

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
14/087,169 ✓	11/22/2013 ✓	Bhupesh Dua	51-3770

CONFIRMATION NO. 5123 ✓

57618
PLUMSEA LAW GROUP, LLC
10411 MOTOR CITY DRIVE
SUITE 320
BETHESDA, MD 20817

FORMALITIES LETTER

OC000000065404428

DOCKETED
PDF SNS
DEC 18 2013
RESP. TO NP DUE
2/12/2014

Date Mailed: 12/12/2013 ✓

NOTICE TO FILE MISSING PARTS OF NONPROVISIONAL APPLICATION

RECEIVED
DEC 16 2013
PLUMSEA LAW GROUP

FILED UNDER 37 CFR 1.53(b)

Filing Date Granted

Items Required To Avoid Abandonment:

An application number and filing date have been accorded to this application. The item(s) indicated below, however, are missing. Applicant is given **TWO MONTHS** from the date of this Notice within which to file all required items below to avoid abandonment. Extensions of time may be obtained by filing a petition accompanied by the extension fee under the provisions of 37 CFR 1.136(a).

- The statutory basic filing fee is missing.
  *Applicant must submit $**280** to complete the basic filing fee for an undiscounted entity. If appropriate, applicant may make a written assertion of entitlement to small entity status and pay the small entity filing fee (37 CFR 1.27) or make a certification of entitlement to micro entity status and pay the micro entity filing fee (37 CFR 1.29).*

The applicant needs to satisfy supplemental fees problems indicated below.

The required item(s) identified below must be timely submitted to avoid abandonment:

- A surcharge (for late submission of the basic filing fee, search fee, examination fee or inventor's oath or declaration) as set forth in 37 CFR 1.16(f) of $ **140** for an undiscounted entity, must be submitted.

SUMMARY OF FEES DUE:

Total fee(s) required within **TWO MONTHS** from the date of this Notice is $ **1740** for an undiscounted entity ✓

- $ **280** Statutory basic filing fee.
- $ **140** Surcharge.
- The application search fee has not been paid. Applicant must submit $ **600** to complete the search fee.
- The application examination fee has not been paid. Applicant must submit $ **720** to complete the examination fee for an undiscounted entity.

Items Required To Avoid Processing Delays:

Applicant is notified that the above-identified application contains the deficiencies noted below. No period for reply is set forth in this notice for correction of these deficiencies. However, if a deficiency relates to the inventor's oath or declaration, the applicant must file an oath or declaration in compliance with 37 CFR 1.63, or a substitute

statement in compliance with 37 CFR 1.64, executed by or with respect to each actual inventor no later than the expiration of the time period set in the "Notice of Allowability" to avoid abandonment. See 37 CFR 1.53(f).

- A properly executed inventor's oath or declaration has not been received for the following inventor(s):
  Bhupesh Dua
  Edward N. Thomas

  Applicant may submit the inventor's oath or declaration at any time before the Notice of Allowance and Fee(s) Due, PTOL-85, is mailed.

Replies must be received in the USPTO within the set time period or must include a proper Certificate of Mailing or Transmission under 37 CFR 1.8 with a mailing or transmission date within the set time period. For more information and a suggested format, see Form PTO/SB/92 and MPEP 512.

Replies should be mailed to:

Mail Stop Missing Parts
Commissioner for Patents
P.O. Box 1450
Alexandria VA 22313-1450

Registered users of EFS-Web may alternatively submit their reply to this notice via EFS-Web.
https://sportal.uspto.gov/authenticate/AuthenticateUserLocalEPF.html

For more information about EFS-Web please call the USPTO Electronic Business Center at **1-866-217-9197** or visit our website at http://www.uspto.gov/ebc.

If you are not using EFS-Web to submit your reply, you must include a copy of this notice.

/ctuazon/

Office of Data Management, Application Assistance Unit (571) 272-4000, or (571) 272-4200, or 1-888-786-0101

Electronic Patent Application Fee Transmittal

Application Number:	14087169
Filing Date:	22-Nov-2013
Title of Invention:	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction
First Named Inventor/Applicant Name:	Bhupesh Dua
Filer:	Eric M. Gibson/Jose Espejo
Attorney Docket Number:	51-3770

Filed as Large Entity

Utility under 35 USC 111(a) Filing Fees

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Basic Filing:				
Utility application filing	1011	1	280	280
Utility Search Fee	1111	1	600	600
Utility Examination Fee	1311	1	720	720
Pages:				
Claims:				
Miscellaneous-Filing:				
Late Filing Fee for Oath or Declaration	1051	1	140	140
Petition:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				
Miscellaneous:				
		Total in USD ($)		**1740**

Electronic Acknowledgement Receipt

EFS ID:	18171757
Application Number:	14087169
International Application Number:	
Confirmation Number:	5123
Title of Invention:	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction
First Named Inventor/Applicant Name:	Bhupesh Dua
Customer Number:	57618
Filer:	Eric M. Gibson/Jose Espejo
Filer Authorized By:	Eric M. Gibson
Attorney Docket Number:	51-3770
Receipt Date:	11-FEB-2014
Filing Date:	22-NOV-2013
Time Stamp:	12:17:16
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	Electronic Funds Transfer
Payment was successfully received in RAM	$1740
RAM confirmation Number	10890
Deposit Account	
Authorized User	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)

Skechers EX1013-p. 66
Skechers v Nike

1	Applicant Response to Pre-Exam Formalities Notice	2014-02-11_51-3770_MP_Notice.pdf	119273 c512331bacb9ea4f81634aaed98a2d68631a5999	no	2
Warnings:					
Information:					
2	Fee Worksheet (SB06)	fee-info.pdf	37069 dac2ff026ac1b58edaab22fde589a09bbb5c2cee	no	2
Warnings:					
Information:					
			Total Files Size (in bytes):	156342	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PATENT APPLICATION FEE DETERMINATION RECORD

Substitute for Form PTO-875

Application or Docket Number: 14/087,169

APPLICATION AS FILED - PART I

FOR	(Column 1) NUMBER FILED	(Column 2) NUMBER EXTRA	SMALL ENTITY RATE($)	SMALL ENTITY FEE($)	OR	OTHER THAN SMALL ENTITY RATE($)	OTHER THAN SMALL ENTITY FEE($)
BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A	N/A			N/A	280
SEARCH FEE (37 CFR 1.16(k), (i), or (m))	N/A	N/A	N/A			N/A	600
EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A	N/A			N/A	720
TOTAL CLAIMS (37 CFR 1.16(i))	20 minus 20 =	*			OR	x 80 =	0.00
INDEPENDENT CLAIMS (37 CFR 1.16(h))	3 minus 3 =	*				x 420 =	0.00
APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is $310 ($155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).						0.00
MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))							0.00
* If the difference in column 1 is less than zero, enter "0" in column 2.			TOTAL			TOTAL	1600

APPLICATION AS AMENDED - PART II

		(Column 1) CLAIMS REMAINING AFTER AMENDMENT		(Column 2) HIGHEST NUMBER PREVIOUSLY PAID FOR	(Column 3) PRESENT EXTRA	SMALL ENTITY RATE($)	SMALL ENTITY ADDITIONAL FEE($)	OR	OTHER THAN SMALL ENTITY RATE($)	OTHER THAN SMALL ENTITY ADDITIONAL FEE($)
AMENDMENT A	Total (37 CFR 1.16(i))	*	Minus	**	=	x =		OR	x =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=	x =		OR	x =	
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							OR		
						TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	

		(Column 1) CLAIMS REMAINING AFTER AMENDMENT		(Column 2) HIGHEST NUMBER PREVIOUSLY PAID FOR	(Column 3) PRESENT EXTRA	RATE($)	ADDITIONAL FEE($)		RATE($)	ADDITIONAL FEE($)
AMENDMENT B	Total (37 CFR 1.16(i))	*	Minus	**	=	x =		OR	x =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=	x =		OR	x =	
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							OR		
						TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	

* If the entry in column 1 is less than the entry in column 2, write "0" in column 3.
** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".
*** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".
The "Highest Number Previously Paid For" (Total or Independent) is the highest found in the appropriate box in column 1.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY.DOCKET.NO	TOT CLAIMS	IND CLAIMS
14/087,169	11/22/2013	3765	1740	51-3770	20	3

CONFIRMATION NO. 5123

UPDATED FILING RECEIPT

57618
PLUMSEA LAW GROUP, LLC
10411 MOTOR CITY DRIVE
SUITE 320
BETHESDA, MD 20817

OC000000066618541

Date Mailed: 02/21/2014

Receipt is acknowledged of this non-provisional patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Inventor(s)

Bhupesh Dua, Portland, OR;
Edward N. Thomas, Portland, OR;

Applicant(s)

NIKE, Inc., Beaverton, OR

Assignment For Published Patent Application

NIKE, Inc., Beaverton, OR

Power of Attorney: None

Domestic Priority data as claimed by applicant

This application is a DIV of 13/533,140 06/26/2012 PAT 8650916
which is a CON of 12/829,788 07/02/2010 PAT 8215132
which is a DIV of 11/558,499 11/10/2006 PAT 7774956

Foreign Applications for which priority is claimed (You may be eligible to benefit from the **Patent Prosecution Highway** program at the USPTO. Please see http://www.uspto.gov for more information.) - None.
Foreign application information must be provided in an Application Data Sheet in order to constitute a claim to foreign priority. See 37 CFR 1.55 and 1.76.

Permission to Access - A proper **Authorization to Permit Access to Application by Participating Offices** (PTO/SB/39 or its equivalent) has been received by the USPTO.

If Required, Foreign Filing License Granted: 12/05/2013
The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 14/087,169**

Projected Publication Date: 06/05/2014

Non-Publication Request: No

Early Publication Request: No

Title

Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction

Preliminary Class

036

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications: No

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at http://www.uspto.gov/web/offices/pac/doc/general/index.html.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, http://www.stopfakes.gov. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4258).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign AssetsControl, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The U.S. offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to promote and facilitate business investment. SelectUSA provides information assistance to the international investor community; serves as an ombudsman for existing and potential investors; advocates on behalf of U.S. cities, states, and regions competing for global investment; and counsels U.S. economic development organizations on investment attraction best practices. To learn more about why the United States is the best country in the world to develop technology, manufacture products, deliver services, and grow your business, visit http://www.SelectUSA.gov or call +1-202-482-6800.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
14/087,169	11/22/2013	Bhupesh Dua	51-3770

CONFIRMATION NO. 5123

57618
PLUMSEA LAW GROUP, LLC
10411 MOTOR CITY DRIVE
SUITE 320
BETHESDA, MD 20817

NOTICE

OC000000066618542

Date Mailed: 02/21/2014

INFORMATIONAL NOTICE TO APPLICANT

Applicant is notified that the above-identified application contains the deficiencies noted below. No period for reply is set forth in this notice for correction of these deficiencies. However, if a deficiency relates to the inventor's oath or declaration, the applicant must file an oath or declaration in compliance with 37 CFR 1.63, or a substitute statement in compliance with 37 CFR 1.64, executed by or with respect to each actual inventor no later than the expiration of the time period set in the "Notice of Allowability" to avoid abandonment. See 37 CFR 1.53(f).

The item(s) indicated below are also required and should be submitted with any reply to this notice to avoid further processing delays.

- A properly executed inventor's oath or declaration has not been received for the following inventor(s):
  Bhupesh Dua
  Edward N. Thomas

Doc Code: PA..

Document Description: Power of Attorney

PTO/AIA/82A (07-12)

Approved for use through 11/30/2014. OMB 0651-0035

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FOR POWER OF ATTORNEY TO ONE OR MORE REGISTERED PRACTITIONERS

NOTE: This form is to be submitted with the Power of Attorney by Applicant form (PTO/AIA/82B or equivalent) to identify the application to which the Power of Attorney is directed, in accordance with 37 CFR 1.5. If the Power of Attorney by Applicant form is not accompanied by this transmittal form or an equivalent, the Power of Attorney will not be recognized in the application.

Application Number	14/087,169
Filing Date	November 22, 2013
First Named Inventor	Bhupesh Dua
Title	Article of Footwear Having a Flat Knit Upper Construction or Other Upper Construction
Art Unit	3765
Examiner Name	Larry D. Worrell Jr.
Attorney Docket Number	51-3770

SIGNATURE of Applicant or Patent Practitioner

Signature	/Eric M. Gibson/	Date	March 12, 2014
Name	Eric M. Gibson	Telephone	(301) 365-9040
Registration Number	59,058		

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4(d) for signature requirements and certifications.

☐ *Total of _____ forms are submitted.

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Doc Code: PA..

Document Description: Power of Attorney

PTO/AIA/82B(07-12)
Approved for use through 11/30/2014. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY BY APPLICANT

I hereby revoke all previous powers of attorney given in the application identified in the attached transmittal letter.

☒ I hereby appoint Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A or equivalent):

57618

OR

☐ I hereby appoint Practitioner(s) named below as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A or equivalent):

Name	Registration Number	Name	Registration Number

Please recognize or change the correspondence address for the application identified in the attached transmittal letter to:

☒ The address associated with the above-mentioned Customer Number.

OR

☐ The address associated with Customer Number: 57618

OR

☐ Firm or Individual Name					
Address					
City		State		Zip	
Country					
Telephone		Email			

I am the Applicant:

☐ Inventor or Joint Inventor

☐ Legal Representative of a Deceased or Legally Incapacitated Inventor

☒ Assignee or Person to Whom the Inventor is Under an Obligation to Assign

☐ Person Who Otherwise Shows Sufficient Proprietary Interest (*e.g.*, a petition under 37 CFR 1.46(b)(2) was granted in the application or is concurrently being filed with this document)

SIGNATURE of Applicant for Patent

Signature		Date	November 8 2012
Name	John P. Coburn III	Telephone	503-671-6453
Title and Company	Secretary, Nike, Inc.		

NOTE: Signature - This form must be signed by the applicant in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. Submit multiple forms for more than one signature, see below *.

☐ *Total of _____ forms are submitted.

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/AIA/01 (06-12)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of Invention	Article of Footwear Having a Flat Knit Upper Construction or Other Upper Construction

As the below named inventor, I hereby declare that:

This declaration is directed to:

☐ The attached application, or

☒ United States application or PCT international application number 14/087,169

filed on November 22, 2013.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTOR

Inventor: Bhupesh Dua Date (Optional): _____

Signature: Bhupesh Dua

Note: An application data sheet (PTO/AIA/14 or equivalent), including naming the entire inventive entity, must accompany this form. Use an additional PTO/SB/AIA01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. This information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/AIA/01 (06-12)
Approved for use through 01/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of Invention	Article of Footwear Having a Flat Knit Upper Construction or Other Upper Construction

As the below named inventor, I hereby declare that:

This declaration is directed to:

☐ The attached application, or

☒ United States application or PCT international application number 14/087,169 filed on November 22, 2013.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTOR

Inventor: Edward N. Thomas Date (Optional): 03/07/2014

Signature: Edward N. Thomas

Note: An application data sheet (PTO/AIA/14 or equivalent), including naming the entire inventive entity, must accompany this form. Use an additional PTO/SB/AIA01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Electronic Acknowledgement Receipt

EFS ID:	18443335
Application Number:	14087169
International Application Number:	
Confirmation Number:	5123
Title of Invention:	Article Of Footwear Having A Flat Knit Upper Construction Or Other Upper Construction
First Named Inventor/Applicant Name:	Bhupesh Dua
Customer Number:	57618
Filer:	Eric M. Gibson/Jose Espejo
Filer Authorized By:	Eric M. Gibson
Attorney Docket Number:	51-3770
Receipt Date:	12-MAR-2014
Filing Date:	22-NOV-2013
Time Stamp:	12:16:47
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Power of Attorney	2014-03-12_51-3770_POA.pdf	250066 8f63e0d03273582bb6d0b0486e05ee7279890380	no	2

Warnings:	
Information:	

2	Oath or Declaration filed	2014-03-12_51-3770_Executed_Dec.pdf	253961 75bebe8d98e322af3dbf07f6edfb09d566fda50e	no	2

Warnings:	
Information:	
Total Files Size (in bytes):	504027

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PTO/SB/08a (01-10)
Approved for use through 07/31/2012. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

INFORMATION DISCLOSURE STATEMENT BY APPLICANT

(Not for submission under 37 CFR 1.99)

Application Number	14087169
Filing Date	2013-11-22
First Named Inventor	Bhupesh Dua
Art Unit	3765
Examiner Name	Larry D. Worrell Jr.
Attorney Docket Number	51-3770

U.S.PATENTS

Examiner Initial*	Cite No	Patent Number	Kind Code[1]	Issue Date	Name of Patentee or Applicant of cited Document	Pages,Columns,Lines where Relevant Passages or Relevant Figures Appear
	1	2343390		1944-03-07	Ushakoff	
	2	2608078		1952-08-26	Anderson	
	3	2569764		1951-10-02	Jonas	
	4	2314098		1943-03-16	McDonald	
	5	2641004		1953-06-09	Whiting et al.	
	6	2440393		1948-04-27	Clark	
	7	4750339		1988-06-14	Simpson et al.	
	8	2147197		1939-02-14	Glidden	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	9	6333105		2001-12-25	Tanaka et al.	
	10	3583081		1974-06-08	Hayashi	
	11	4447967		1984-05-15	Zaino	
	12	4813158		1989-03-21	Brown	
	13	4756098		1988-07-12	Boggia	
	14	5345638		1994-09-13	Nishida	
	15	4785558		1988-11-22	Shiomura	
	16	0601192		1898-03-22	Woodside	
	17	1215198	A	1917-02-06	Rothstein	
	18	1597934	A	1926-08-31	Stimpson	
	19	1888172	A	1932-11-15	Joha	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	20	1902780	A	1933-03-21	Holden et al.	
	21	1910251	A	1933-05-23	Joha	
	22	2001293	A	1935-05-14	Wilson	
	23	2047724	A	1936-07-14	Zuckerman	
	24	2330199	A	1943-09-28	Basch	
	25	2400692	A	1946-05-21	Herbert	
	26	2586045	A	1952-02-19	Hoza	
	27	2675631	A	1954-04-20	Doughty	
	28	2994322	A	1961-08-01	Cullen et al.	
	29	3694940	A	1972-10-03	Stohr	
	30	3704474	A	1972-12-05	Winkler	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	31	3766566	A	1973-10-23	Tadakoro	
	32	3778856	A	1973-12-18	Christie et al.	
	33	3952427	A	1976-04-27	Von den Benken et al.	
	34	3972086	A	1976-08-03	Belli et al.	
	35	4027402	A	1977-06-07	Liu et al.	
	36	4031586	A	1977-06-28	Von den Benken et al.	
	37	4211806	A	1980-07-08	Civardi et al.	
	38	4232458	A	1980-11-11	Bartels	
	39	4255949	A	1981-03-17	Thorneburg	
	40	4258480	A	1981-03-31	Famolare, Jr.	
	41	4317292	A	1982-03-02	Melton	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	42	4373361	A	1983-02-15	Thorneburg	
	43	4465448	A	1984-08-14	Aldridge	
	44	4607439	A	1986-08-26	Harada	
	45	4737396	A	1988-04-12	Kamat	
	46	5031423	A	1991-07-16	Ikenaga	
	47	5095720	A	1992-03-17	Tibbals, Jr.	
	48	5117567	A	1992-06-02	Berger	
	49	5152025	A	1992-10-16	Hirmas	
	50	5192601	A	1993-03-09	Neisler	
	51	5353524	A	1994-10-11	Brier	
	52	5461884	A	1995-10-31	McCartney et al.	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	53	5371957	A	1994-12-13	Gaudio	
	54	5511323	A	1996-04-30	Dahlgren	
	55	5572860	A	1996-11-12	Mitsumoto et al.	
	56	5575090	A	1996-11-19	Condini	
	57	5623840	A	1997-04-29	Roell	
	58	5729918	A	1998-03-24	Smets	
	59	5735145	A	1998-04-07	Pernick	
	60	5746013	A	1998-05-05	Fay, Sr.	
	61	5765296	A	1998-06-16	Ludemann et al.	
	62	5884419	A	1999-03-23	Davidowitz et al.	
	63	5996189	A	1999-12-07	Wang	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	64	6029376	A	2000-02-29	Cass	
	65	6032387	A	2000-03-07	Johnson	
	66	6052921	A	2000-04-25	Oreck	
	67	6088936	A	2000-07-18	Bahl	
	68	6151802	A	2000-11-28	Reynolds	
	69	6170175	B1	2001-01-09	Funk	
	70	6308438	B1	2001-10-30	Throneburg et al.	
	71	6401364	B1	2002-06-11	Burt	
	72	6558784	B1	2003-05-06	Norton et al.	
	73	6588237	B2	2003-07-08	Cole et al.	
	74	6754983	B2	2004-06-29	Hatfield et al.	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	75	6910288	B2	2005-06-28	Dua	
	76	6922917	B2	2005-08-02	Kerns et al.	
	77	6931762	B1	2005-08-23	Dua	
	78	D517297	S	2006-03-21	Jones et al.	
	79	7051460	B2	2006-05-30	Orei et al.	
	80	7056402	B2	2006-06-06	Koerwien et al.	
	81	7347011	B2	2008-02-25	Dua et al.	
	82	7441348		2008-10-28	Dawson	
	83	7543397	B2	2009-06-09	Kilgore et al.	
	84	7568298	B2	2009-08-04	Kerns	
	85	7682219	B2	2010-03-23	Falla	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	86	8490299	B2	2013-07-23	Dua et al.	
	87	8215132		2012-07-10	Dua et al.	
	88	2376399		1943-10-09	Yandell	
	89	2904980		1959-09-22	Stinson	
	90	3402323		1968-09-17	Longstreth	
	91	3603006		1971-09-07	Davenport et al.	
	92	4646727		1987-03-03	Chambers	
	93	4878504		1989-11-07	Nelson	
	94	4998722		1991-03-12	Scott	
	95	5067260		1991-11-26	Jenkins, Jr.	
	96	5257969		1993-11-02	Mance	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	97	D346686		1994-05-10	Hatfield	
	98	5377430		1995-01-03	Hatfield et al.	
	99	7016867		2006-03-21	Lyden	
	100	7107235		2006-09-12	Lyden	
	101	7774956		2010-08-17	Dua et al.	
	102	8650916		2014-02-18	Dua et al.	

If you wish to add additional U.S. Patent citation information please click the Add button.

U.S.PATENT APPLICATION PUBLICATIONS

Examiner Initial*	Cite No	Publication Number	Kind Code[1]	Publication Date	Name of Patentee or Applicant of cited Document	Pages,Columns,Lines where Relevant Passages or Relevant Figures Appear
	1	20020148258		2002-10-17	Cole et al.	
	2	20120255201		2012-10-11	Little	
	3	20020078599	A1	2002-06-27	Delgorgue et al.	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	4	20030126762	A1	2003-07-10	Tseng	
	5	20030191427	A1	2003-10-19	Jay et al.	
	6	20040118018	A1	2004-06-24	Dua	
	7	20040181972	A1	2004-09-23	Csorba	
	8	20050115284	A1	2005-06-02	Dua	
	9	20050193592	A1	2005-09-08	Dua et al.	
	10	20050273988	A1	2005-12-15	Christy	
	11	20050284000	A1	2005-12-29	Kerns	
	12	20060059715	A1	2006-03-26	Aveni	
	13	20060162187	A1	2006-07-27	Byrnes et al.	
	14	20070022627	A1	2007-02-01	Sokolowski et al.	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	15	20070180730	A1	2007-08-09	Greene et al.	
	16	20070180730	A1	2007-12-27	Baychar	
	17	20080017294	A1	2008-01-24	Bailey et al.	
	18	20080078102	A1	2008-04-03	Kilgore et al.	
	19	20080110048	A1	2008-05-15	Dua et al.	
	20	20080189830	A1	2008-08-14	Egglesfield	
	21	20080313939	A1	2008-12-25	Ardill	
	22	20090068908	A1	2009-03-12	Hinchcliff	
	23	20100051132	A1	2010-03-04	Glenn	
	24	20100154256	A1	2010-06-24	Dua	
	25	20100170651	A1	2010-07-08	Scherb et al.	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	26	20110030244	A1	2011-02-10	Motawi et al.	
	27	20110078921	A1	2011-04-07	Greene et al.	
	28	20120255201	A1	2012-09-20	Huffa et al.	
	29	20120285043		2012-11-15	Dua et al.	
	30	20060048413		2006-03-09	Sokolowski et al.	

If you wish to add additional U.S. Published Application citation information please click the Add button.

FOREIGN PATENT DOCUMENTS

Examiner Initial*	Cite No	Foreign Document Number[3]	Country Code[2]	Kind Code[4]	Publication Date	Name of Patentee or Applicant of cited Document	Pages,Columns,Lines where Relevant Passages or Relevant Figures Appear	T[5]
	1	19728848	DE		1999-01-07	Kundert Werke Gmbh		☐
	2	0448714	EP		1991-10-02	Toray Industries		☐
	3	1233091	EP		2002-08-21	Lee Sara Corp		☐
	4	0231247	WO		2002-04-18	Prodesco Inc.		☐

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	5	H11302943	JP		1999-11-02	Masahiko et al.		☐
	6	19738433	DE		1998-04-02	Recytex Textilaufbereltung Gmb		☐
	7	0758693	EP		1997-02-19	Buck		☐
	8	7304678	NL		1974-10-08	Wildeman et al.		☐
	9	1084173	DE		1960-06-23	Geissler		☐
	10	0032861	WO		2000-06-08	Recaro Gmbh & Co.		☐
	11	538865	GB		1941-08-20	Brew		☐
	12	0728860	EP		1996-08-28	Hoeshst Trevira Gmbh & Co Kg		☐
	13	H08109553	JP		1996-04-30	Toho Seni Kk		☐
	14	2171172	FR		1973-09-21	ICI Ltd		☐
	15	1603487	GB		1981-11-25	Inmont Corporation		☐

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	16	H06113905	JP		1994-04-26	Daiyu Shoji Kk		☐
	17	9003744	WO		1990-04-19	RBFPT Inc.		☐
	18	870963	DE	C	1953-03-19	Hofer		☐
	19	0279950	EP	A2	1998-08-31	Arova Mammut		☒
	20	0898002	EP	A2	1999-02-24	Shima Seiki Mfg		☐
	21	1437057	EP	A1	2004-07-14	Mizuno KK		☐
	22	1563752	EP	A1	2005-08-17	Calzado Robusta S.L.		☐
	23	1602762	EP	A1	2005-12-07	Shima Seiki Mfg		☐
	24	1972706	EP	A1	2008-09-27	Shima Seiki Mfg		☐
	25	2018837	GB	A	1979-10-24	Dubied & Cie, S.A.E		☐

If you wish to add additional Foreign Patent Document citation information please click the Add button

NON-PATENT LITERATURE DOCUMENTS

INFORMATION DISCLOSURE STATEMENT BY APPLICANT

(**Not for submission under 37 CFR 1.99)**

Application Number	14087169
Filing Date	2013-11-22
First Named Inventor	Bhupesh Dua
Art Unit	3765
Examiner Name	Larry D. Worrell Jr.
Attorney Docket Number	51-3770

Examiner Initials*	Cite No	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc), date, pages(s), volume-issue number(s), publisher, city and/or country where published.	T[5]
	1	Declaration of Dr. Edward C. Frederick from the US Patent and Trademark Office Inter Partes Review of US Patent No. 7,347,011 (178 pp).	☒
	2	David J. Spencer, Knitting Technology: A Comprehensive Handbook and Practical Guide (Third ed., Woodhead Publishing Ltd. 2001) (413 pp).	☒
	3	Excerpt of Hannelore Eberle et al., Clothing Technology (Third English ed., Beuth-Verlag GmnH 2002) (book cover and back; pp2-3, 83).	☒
	4	International Search Report and Written Opinion in connection with PCT/US2009/056795 mailed on April 20, 2010.	☐
	5	International Search Report and Written Opinion in connection with PCT/US2012/028576 mailed on October 1, 2012	☐
	6	International Search Report and Written Opinion in connection with PCT/US2012/028559 mailed on October 19, 2012	☐
	7	International Search Report and Written Opinion in connection with PCT/US2012/028534 mailed on October 17, 2012	☐
	8	International Preliminary Report on Patentability in connection with PCT/US2012/028534 mailed September 17, 2013	☐
	9	International Preliminary Report on Patentability in connection with PCT/US2012/028576 mailed September 17, 2013	☐
	10	International Search Report, mailed April 4,2008, issued in the International Application No. PCT/US2007/084013.	☐

INFORMATION DISCLOSURE STATEMENT BY APPLICANT (**Not for submission under 37 CFR 1.99)**		
	Application Number	14087169
	Filing Date	2013-11-22
	First Named Inventor	Bhupesh Dua
	Art Unit	3765
	Examiner Name	Larry D. Worrell Jr.
	Attorney Docket Number	51-3770

	11	International Preliminary Report on Patentability, mailed May 22,2009, issued in the International Application No. PCT/US2007/084013.	☐

If you wish to add additional non-patent literature document citation information please click the Add button

EXAMINER SIGNATURE

Examiner Signature		Date Considered	

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through a citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

[1] See Kind Codes of USPTO Patent Documents at www.USPTO.GOV or MPEP 901.04. [2] Enter office that issued the document, by the two-letter code (WIPO Standard ST.3). [3] For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. [4] Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST.16 if possible. [5] Applicant is to place a check mark here if English language translation is attached.

INFORMATION DISCLOSURE STATEMENT BY APPLICANT

(**Not for submission under 37 CFR 1.99)**

Application Number	14087169
Filing Date	2013-11-22
First Named Inventor	Bhupesh Dua
Art Unit	3765
Examiner Name	Larry D. Worrell Jr.
Attorney Docket Number	51-3770

CERTIFICATION STATEMENT

Please see 37 CFR 1.97 and 1.98 to make the appropriate selection(s):

☐ That each item of information contained in the information disclosure statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of the information disclosure statement. See 37 CFR 1.97(e)(1).

OR

☐ That no item of information contained in the information disclosure statement was cited in a communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the person signing the certification after making reasonable inquiry, no item of information contained in the information disclosure statement was known to any individual designated in 37 CFR 1.56(c) more than three months prior to the filing of the information disclosure statement. See 37 CFR 1.97(e)(2).

☐ See attached certification statement.

☐ The fee set forth in 37 CFR 1.17 (p) has been submitted herewith.

☒ A certification statement is not submitted herewith.

SIGNATURE

A signature of the applicant or representative is required in accordance with CFR 1.33, 10.18. Please see CFR 1.4(d) for the form of the signature.

Signature	/Eric M. Gibson/	Date (YYYY-MM-DD)	2014-03-13
Name/Print	Eric M. Gibson	Registration Number	59,058

This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1 hour to complete, including gathering, preparing and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

(19) BUNDESREPUBLIK DEUTSCHLAND

DEUTSCHES PATENT- UND MARKENAMT

(12) **Offenlegungsschrift**

(10) **DE 197 28 848 A 1**

(51) Int. Cl.[6]:
A 41 B 11/00
D 04 B 1/00
G 09 F 3/04

(21) Aktenzeichen: 197 28 848.0
(22) Anmeldetag: 5. 7. 97
(43) Offenlegungstag: 7. 1. 99

(71) Anmelder:
Kunert Werke GmbH, 87509 Immenstadt, DE

(74) Vertreter:
Rüger und Kollegen, 73728 Esslingen

(72) Erfinder:
Schützmeier, Hermann, 87509 Immenstadt, DE

(56) Entgegenhaltungen:
DE-PS 8 29 161

Die folgenden Angaben sind den vom Anmelder eingereichten Unterlagen entnommen

Prüfungsantrag gem. § 44 PatG ist gestellt

(54) Bekleidungsstück mit eingeprägtem Zeichen

(57) Ein vorzugsweise aus Maschenware ausgebildetes Bekleidungsstück besteht wenigstens teilweise aus einem elastomeren, thermisch deformierbaren Kunstfasergarn. Um das Bekleidungsstück mit gewünschten Zeichen, Kennzeichnungen u. dgl. zu versehen, sind diese in die Maschenware durch Temperatur- und/oder Druckeinwirkung eingeprägt. Es werden dabei Prägebereiche ausgebildet, in denen die Maschenware wesentlich dünner liegt als in der anschließenden Umgebung. Die Prägebereiche sind dabei im wesentlichen glatt, ohne daß hier die Fadenstruktur aufgelöst wäre. Obwohl die Maschen als solche erhalten sind, ergibt sich, beispielsweise durch partielles Anschmelzen der Oberfläche, ein glattes, im Vergleich zur Umgebung geändertes Aussehen, was eine plastische oder räumliche Wirkung des gewünschten Schriftzugs oder sonstigen Logos hervorbringt.

DE 197 28 848 A 1

DE 197 28 848 A 1

Skechers EX1013-p. 97
Skechers v Nike

Beschreibung

Die Erfindung betrifft ein Bekleidungsstück, insbesondere ein Beinbekleidungsstück, wie einen Strumpf oder eine Strumpfhose, mit den Merkmalen des Oberbegriffs des Patentanspruchs 1.

Sowohl bei Beinbekleidungsstücken, wie halterlosen Damenstrümpfen oder Feinstrumpfhosen, als auch bei anderen Kleidungsstücken, wie Freizeit- oder Sportbekleidung, ist häufig der Wunsch vorhanden, an dem betreffenden Kleidungsstück Markierungen, Zeichen, Beschriftungen, Logos, Schmuckelemente od. dgl. anzubringen. Dies erfolgt häufig durch aufgenähte Etiketten oder Farbaufdrucke. Jedoch sind in einigen Fällen sowohl Farbaufdrucke als auch Etiketten nicht praktikabel. Beide stören häufig den optischen Eindruck oder verschlechtern die Trageeigenschaften zumindest an der Anbringstelle.

Insbesondere elastische Gewebe oder Gestricke sind zum Anbringen von Farbmarkierungen oder Etiketten meist wenig geeignet. Während sich Farbmarkierungen in diesem Bereich beim Spannen des Grundmaterials lösen können, verändern aufgenähte Etiketten die Eigenschaften des textilen Flächengebildes, insbesondere die Elastizität nachhaltig. Außerdem stören beide den optischen Gesamteindruck. Dies gilt insbesondere für Abschnitte eines Bekleidungsstücks, die in getragenem Zustand gespannt, d. h. gedehnt sind. Dies ist beispielsweise an dem oberen Rand von halterlosen Damenstrümpfen oder Feinstrumpfhosen der Fall. Darüber hinaus gilt dies für entsprechende Abschnitte sonstiger Bekleidungsstücke.

Davon ausgehend ist es Aufgabe der Erfindung, eine Möglichkeit zu schaffen, Bekleidungsstücke mit einer Kennzeichnung zu versehen, die die Trageeigenschaften an der entsprechenden Stelle nicht fühlbar verändert.

Diese Aufgabe wird von einem Bekleidungsstück mit den Merkmalen des Patentanspruchs 1 gelöst.

Das erfindungsgemäße Bekleidungsstück weist wenigstens in dem zu kennzeichnenden Bereich ein textiles Flächengebilde auf, das durch ein oder mehrere Fäden gebildet ist, die dauerhaft verformbar sind. Vorzugsweise sind diese durch Temperatur und Druck verformbare Kunstfasern. Diese sind miteinander vermascht, so daß das textile Flächengebilde in entspanntem Zustand eine Dicke aufweist, die größer als die Fadendicke ist. Beispielsweise wird dieser Bereich des Flächengebildes durch Maschen gebildet, die eine gewisse Ausdehnung senkrecht zu der Fläche des Flächengebildes haben. Das Gestrick kann sowohl ein- als auch mehrfädig ausgebildet sein.

Dem zu erzeugenden Muster, dem Logo oder der sonstigen Markierung entsprechend sind Prägebereiche festgelegt, in denen das Flächengebilde durch Druck- und Temperatureinwirkung so umgeformt worden ist, daß es eine verminderte Dicke aufweist. Gegenüber diesen Prägebereichen wirken die übrigen Bereiche des textilen Flächengebildes erhaben, so daß eine räumliche Wirkung zustandekommt. Damit ist es möglich, ohne Veränderung der jeweiligen Farbe Schriftzüge, Logos oder sonstige Markierungen in den betreffenden Bereich des Bekleidungsstücks einzuprägen, die insbesondere dann plastisch hervortreten, wenn das Flächengebilde entspannt ist, d. h. keinem Zug ausgesetzt ist. Die Prägeparameter sind dabei vorzugsweise so festgelegt, daß die einzelnen Fäden oder Fasern des textilen Flächengebildes nicht aufgelöst werden, sondern bei dem Prägevorgang erhalten bleiben. Sie werden lediglich deformiert. Damit wird eine Schädigung des Gestricks insbesondere im Übergangsbereich von dem Prägebereich zu umgebenden ungeprägten Bereichen vermieden.

Auf die genannte Weise lassen sich insbesondere bei Feinstrumpfhosen, Strümpfen, Miederwaren oder Sportbekleidung Schriftzüge oder Logos einprägen, die relativ auffällig sind, wenn die Ware lose ausgebreitet liegt und die die Trageeigenschaften nicht fühlbar verändern.

Das textile Flächengebilde besteht vorzugsweise aus Kunstfasern, die bei dem Prägevorgang dauerhaft verformt werden. Auch nach vielmaligem Tragen oder Waschen bleibt das eingeprägte Muster in dem lose liegenden Material deutlich sichtbar.

Ein besonders guter Effekt wird erreicht, wenn das textile Flächengebilde eine Maschenware, insbesondere ein Gewirk, ein Gestrick oder Raschelware ist. Dabei ist es besonders zweckmäßig, wenn der Prägebereich auf einem mehrlagigen Textilbereich ausgebildet ist. Hier tritt die räumliche Wirkung durch den Unterschied zwischen den Prägebereichen und den erhabenen Bereichen am deutlichsten hervor. Vorzugsweise sind die einzelnen Lagen des Flächengebildes auch in den Prägebereichen miteinander nicht verschmolzen, so daß der Tragekomfort nicht beeinträchtigt ist.

Die durch ein elastomeres Garn gebildeten einzelnen Fasern oder Fäden des textilen Flächengebildes sind vorzugsweise oberflächig so weit angeschmolzen, daß sich in dem Prägebereich im ungedehnten Zustand fast glatte Flächenbereiche ergeben, die die Strickstruktur kaum mehr erkennen lassen. Der Schmelzvorgang oder die Strukturänderung geht jedoch nicht so weit, daß die einzelnen Fäden ganz miteinander verschmelzen. Vielmehr bleiben sie in dem Gewebe wenigstens etwas beweglich, um keine steifen Bereiche zu erzeugen.

Die Prägebereiche können als Buchstabenzeichen od. dgl. ausgebildet werden. Sie können sowohl als Verzierungen als auch zur Kennzeichnung oder als Informationsträger verwendet werden.

In der Zeichnung ist ein Ausführungsbeispiel des Gegenstandes der Erfindung veranschaulicht. Es zeigen:

Fig. 1 einen mit einer eingeprägten Kennzeichnung versehenen Damenstrumpf, in schematisierter Darstellung,

Fig. 2 den Damenstrumpf nach **Fig.** 1, in einer ausschnittsweisen Darstellung seines oberen Randes,

Fig. 3 eine perspektivische Schnittdarstellung eines geprägten Bereichs und sich daran anschließender ungeprägter Bereiche des Randes des Strumpfs nach **Fig.** 2, in stark schematisierter Prinzipdarstellung und

Fig. 4 ein geprägtes textiles Flächengebilde, in aufs Äußerste schematisierter Schnittdarstellung und in einlagiger Ausführung.

Beschreibung

In **Fig.** 1 ist ein Damenstrumpf **1** dargestellt, dessen oberer Rand **2** mit einem Markenlogo **3** versehen ist. Der obere Rand **2** ist als Doppelrand oder Bündchen ausgebildet. Das hier doppelt vorhandene Strumpfmaterial ist durch den sogenannten Umhang **4** miteinander verbunden. In dem bei einer Trennlinie **5** beginnenden Rand- und Griffbereich **6** ist das Strumpfmaterial unter Verwendung texturierter Garne besonders elastisch ausgebildet. Der Damenstrumpf **1** ist insgesamt rundgestrickt aus synthetischem Garn gearbeitet. Dabei können auch mehrere Synthetikgarne unterschiedlicher Konstruktion verarbeitet sein. Beispielsweise kann in den Maschenreihen abwechselnd ein umwundenes elastomeres Garn und ein glattes Garn verstrickt sein ("Satin-Sheer"). Das synthetische elastomere Garn ist vorzugsweise aus Polyamidfasern gebildet, wobei unter Umständen auch andere Garne in Frage kommen.

Der in den Saum **2** eingeprägte Schriftzug **3** wird, wie **Fig.** 2 zeigt, durch Prägebereiche **8** gebildet, die von ungeprägten Bereichen **9** umgeben sind. Während die ungeprägt-

ten Bereiche **9** deutlich die Maschenstruktur des rundgestrickten Flächengebildes erkennen lassen, ist die Struktur der Maschenware in den Prägebereichen **8** so weit geändert, daß diese Flächenbereiche fast glatt sind. Dabei sind die einzelnen Fäden allenfalls oberflächlich angeschmolzen oder zumindest deformiert. Wie aus **Fig.** 3 ersichtlich ist, sind sowohl in dem ungeprägten Bereich **9** als auch in dem Prägebereich **8** einzelne Fäden **11**, **12** erkennbar, wobei die Maschen in dem Prägebereich **8** nicht zerstört sind.

Während in dem ungeprägten Bereich die Gesamtdicke des hier aus zwei Lagen **13**, **14** bestehenden Flächengebildes deutlich größer als der Durchmesser eines Fadens und auch größer als eine einzelne Masche ist, ist die Dicke in dem Prägebereich **8** geringer. Jedoch wird dies nur durch Verformung der einzelnen Fäden **11**, **12**, nicht aber durch Verschmelzen beider Lagen **13**, **14** miteinander erreicht. Während die Maschen der Lagen **13**, **14** in den ungeprägten Bereichen **9** mehr oder weniger räumlich angeordnet sein und aus den Fäden **11**, **12** Filamente herausragen können, die einen gewissen Flor schaffen, liegen die Maschen zumindest der oberen Lage **13**, in dem Prägebereich **8** flach, wobei die aus den Fäden **11**, **12** herausragenden Filamente hier angeschmolzen sind. Dadurch ist die Maschenstruktur kaum mehr zu erkennen und der Prägebereich **8** kann eine glatte, zum Teil auch glänzende Oberfläche erhalten, während die übrigen Bereiche matt und erhaben erscheinen. Die Maschenstruktur ist jedoch erhalten, so daß die Prägebereiche **8** sowohl dehnbar als auch dauerhaft mechanisch stabil sind.

Bei Dehnung des Saums **2**, insbesondere wenn der Strumpf **1** getragen wird, zeigen die Prägebereiche **8** im Vergleich zu den ungeprägten Bereichen kaum oder nicht verändertes Dehnverhalten. Die Fäden **11**, **12** sind in den Prägebereichen **8** im Wesentlichen genauso stabil wie in den ungeprägten Bereichen **9**, so daß der eingeprägte Schriftzug **3** keine nachteiligen Auswirkungen auf den Saum **2** hat.

Wie bei dem Strumpf **1** ist es gleichermaßen möglich, an einem entsprechenden Bund einer Feinstrumpfhose Schriftzüge **3** oder sonstige Markierungen, Logos od. dgl. anzubringen. Dies kann ebenfalls an entsprechenden Teilen von sonstigen, aus elastomeren Garnen hergestellter Kleidungsstücke geschehen. Dies können beispielsweise Bodies sein. Die eingeprägten Zeichen können an beliebigen zweilagig ausgebildeten Stellen, wie beispielsweise Ärmelbündchen, Kragen oder an sonstigen Stellen vorgesehen werden.

Darüber hinaus ist es möglich, textile Flächengebilde **15**, wie sie aus **Fig.** 4 ersichtlich sind, mit Prägebereichen **8'** zu versehen, wenn die betreffenden Flächengebilde **15** einen räumlichen Aufbau haben. Dieser kann sich, wie in **Fig.** 4 angedeutet, dadurch ergeben, daß das hier im Querschnitt veranschaulichte Flächengebilde in entspanntem Zustand nicht eben, sondern gerippt liegt. Das Flächengebilde **15** ist vorzugsweise eine Maschenware, die in diesem Fall sowohl ein- als auch mehrlagig ausgebildet sein kann. Der beim Prägen entstehende dauerhafte Dickenunterschied zwischen Prägebereichen **8'** und ungeprägten Bereichen **9'** ergibt sich durch plastische Verbiegung einzelner Rippen **17**, **18**, die gegenüber undeformierten Rippen **19**, **20** eine geringere Höhe aufweisen.

Ein vorzugsweise aus Maschenware ausgebildetes Bekleidungsstück **1** besteht wenigstens teilweise aus einem elastomeren, thermisch deformierbaren Kunstfasergarn. Um das Bekleidungsstück mit gewünschten Zeichen, Kennzeichnungen u. dgl. zu versehen, sind diese in die Maschware durch Temperatur- und/oder Druckeinwirkung eingeprägt. Es werden dabei Prägebereiche **8** ausgebildet, in denen die Maschenware wesentlich dünner liegt als in der anschließenden Umgebung **9**. Die Prägebereiche **8** sind dabei im Wesentlichen glatt ohne daß hier die Fadenstruktur aufgelöst wäre. Obwohl die Maschen als solche erhalten sind, ergibt sich, beispielsweise durch partielles Anschmelzen der Oberfläche, ein glattes, im Vergleich zur Umgebung geändertes Aussehen, was eine plastische oder räumliche Wirkung des gewünschten Schriftzugs oder sonstigen Logos hervorbringt.

Patentansprüche

1. Bekleidungsstück (**1**), insbesondere Beinbekleidungsstück,
mit wenigstens einem durch ein textiles Flächengebilde (**2**) gebildeten Abschnitt, der von einem oder mehreren dauerhaft verformbaren Fäden (**11**, **12**) gebildet ist und der eine Dicke aufweist, die deutlich größer ist, als die Dicke des Fadens, **dadurch gekennzeichnet**,
daß in das textile Flächengebilde (**2**) eine Struktur eingeprägt ist, die erhabene Bereiche (**9**) sowie Prägebereiche (**8**) enthält, die zwischen den erhabenen Bereichen (**9**) angeordnet sind und die eine Dicke aufweisen, die geringer ist als die Dicke der erhabenen Bereiche (**9**).

2. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß der oder die Fäden (**11**, **12**) Kunstfasern sind, die thermoplastische Eigenschaften aufweisen.

3. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß das textile Flächengebilde (**2**) eine Maschenware, insbesondere ein Gewirk, ein Gestrick oder Raschelware ist.

4. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß der oder die das Flächengebilde (**2**) bildenden Fäden (**11**, **12**) sowohl in den erhabenen Bereichen (**9**) als auch in den Prägebereichen (**8**) beweglich gelagert sind.

5. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß der oder die das Flächengebilde (**2**) bildenden Fäden (**11**, **12**) sowohl in den erhabenen Bereichen (**9**) als auch in den Prägebereichen (**8**) untereinander unverbunden sind.

6. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß die Fadenstruktur des oder der das Flächengebilde (**2**) bildenden Fäden (**11**, **12**) sowohl in den erhabenen Bereichen (9 als auch in den Prägebereichen (**8**) erhalten ist.

7. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß der oder die Fäden (**11**, **12**) aus einheitlichem Material bestehen.

8. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß der oder die Fäden (**11**, **12**) aus unterschiedlichen Materialien bestehen.

9. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß das Flächengebilde (**2**) elastisch ist.

10. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß das Flächengebilde (**2**) mehrlagig (**13**, **14**) ausgebildet ist.

11. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß das Flächengebilde (**2**) wenigstens abschnittsweise wenigsten zwei aufeinander liegende Lagen (**13**, **14**) aufweist.

12. Bekleidungsstück nach Anspruch 11, dadurch gekennzeichnet, daß die Lagen (**13**, **14**) untereinander nicht verbunden sind.

13. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß der oder die Fäden (**11**, **12**) des Flächengebildes (**2**) in den Prägebereichen (**8**) oberflächlich angeschmolzen sind.

14. Bekleidungsstück nach Anspruch 13, dadurch ge-

kennzeichnet, daß die oberflächlich angeschmolzenen Fäden (**11**, **12**) in dem Prägebereich (**8**) eine fast glatte Oberfläche definieren, die die Maschenstruktur des Flächengebildes (**2**) kaum mehr erkennen lassen.

15. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß die Prägebereiche (**8**) Informationsträger sind.

16. Bekleidungsstück nach Anspruch 1, dadurch gekennzeichnet, daß die Prägebereiche (**8**) als Logo ausgebildet sind.

Hierzu 3 Seite(n) Zeichnungen

- Leerseite -

Nummer: **DE 197 28 848 A1**
Int. Cl.[6]: **A 41 B 11/00**
Offenlegungstag: 7. Januar 1999

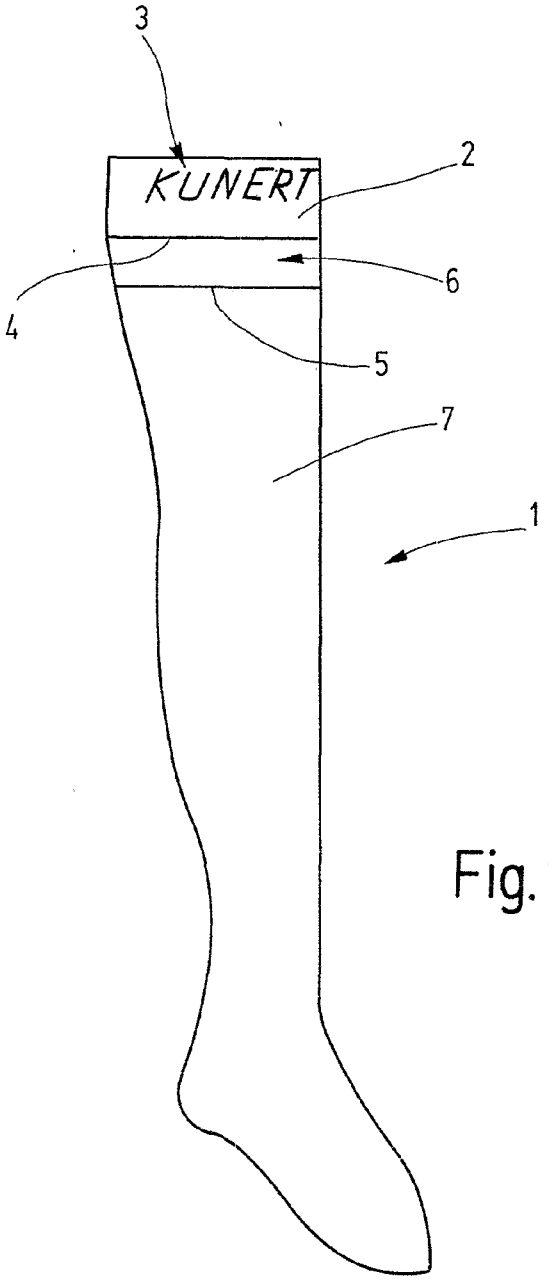


Fig. 1

Skechers EX1013-p. 102
Skechers v Nike

Nummer: **DE 197 28 848 A1**
Int. Cl.[6]: **A 41 B 11/00**
Offenlegungstag: 7. Januar 1999

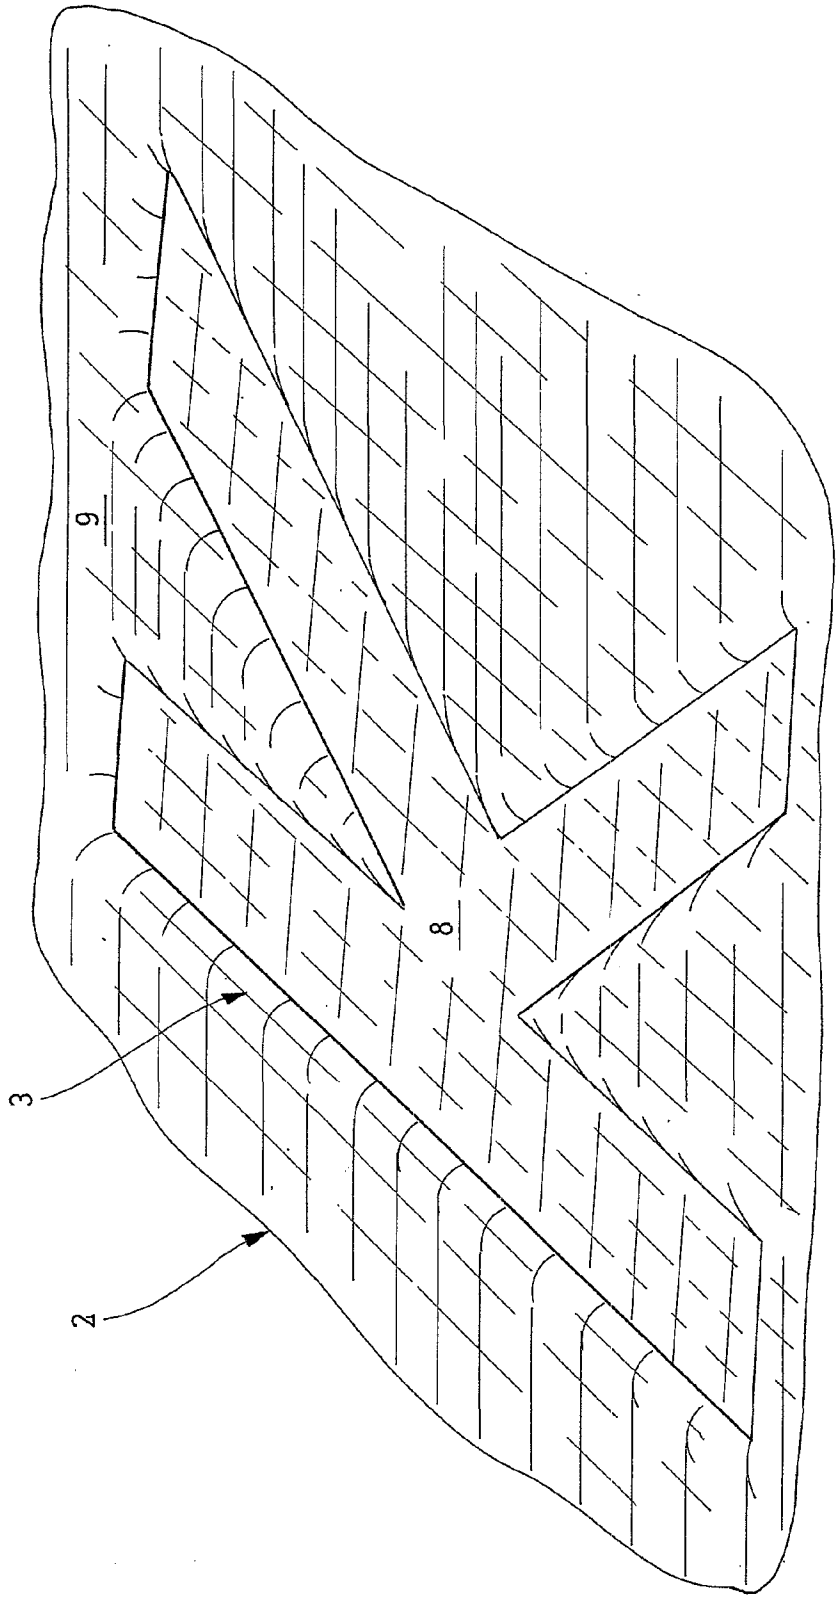


Fig. 2

Skechers EX1013-p. 103
Skechers v Nike

Nummer: DE 197 28 848 A1
Int. Cl.[6]: A 41 B 11/00
Offenlegungstag: 7. Januar 1999

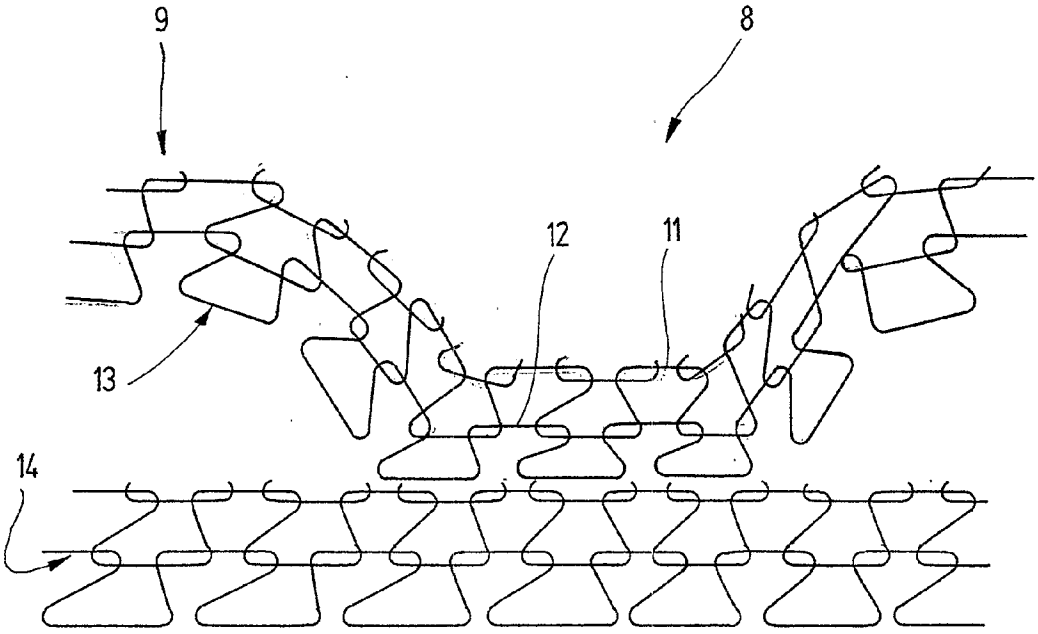


Fig. 3

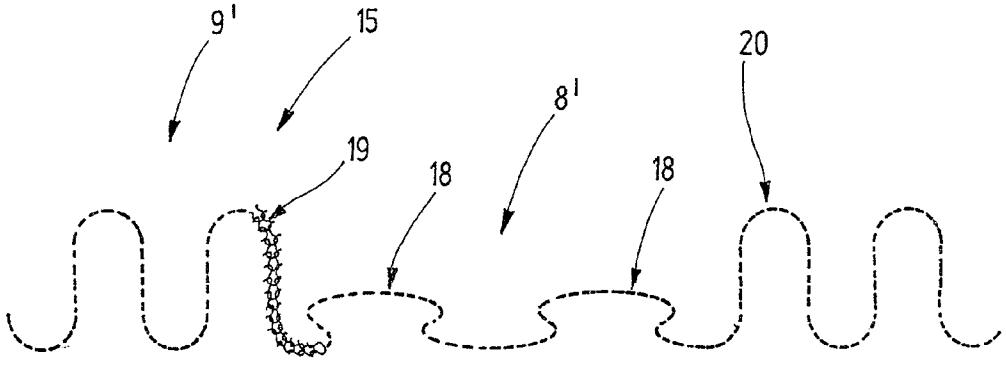


Fig. 4

Skechers EX1013-p. 104
Skechers v Nike

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 448 714 B1

(12) EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
03.07.1996 Bulletin 1996/27

(21) Application number: 89911609.9

(22) Date of filing: 18.10.1989

(51) Int Cl.⁶: D04B 21/14, A01G 9/14, A44D 27/28, A41D 27/28

(86) International application number:
PCT/JP89/01068

(87) International publication number:
WO 91/05897 (02.05.1991 Gazette 1991/10)

(54) PROCESS FOR PRODUCING A FABRIC HAVING OVERLAPPING STRIPS

VERFAHREN ZUR HERSTELLUNG VON STOFF MIT ÜBERLAPPENDEN LAMELLEN

PROCEDE DE PRODUCTION D'UN TISSU PRESENTANT DES BANDES LISSES RECOUVRANTES

(84) Designated Contracting States:
DE FR GB

(43) Date of publication of application:
02.10.1991 Bulletin 1991/40

(73) Proprietor: TORAY INDUSTRIES, INC.
Tokyo 103 (JP)

(72) Inventors:
- NAKAJIMA, Tamotu
Kouka-gun Shiga 520-33 (JP)
- OKAMOTO, Miyoshi
Takatsuki-shi Osaka 569 (JP)
- SHIMIZU, Hisao
Otsu-shi Shiga 520 (JP)

(74) Representative: Coleiro, Raymond et al
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(56) References cited:
DE-A- 2 714 059
FR-A- 867 813
GB-A- 2 209 350
US-A- 4 626 465
FR-A- 375 439
GB-A- 2 025 194
JP-Y- 5 746 393

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Printed by Jouve, 75001 PARIS (FR)

EP 0 448 714 B1

Description

The invention relates to a process for producing a special structure, in particular fabrics having overlapping strips providing openings between the strips.

Conventionally, when constructing fabrics, priority has often been given to fashion, including color and design, and brand names, and manufacturers have simply relied on the primary characteristics of fiber materials (such as the water absorbing ability of cotton) when producing articles having a permeability, waterproofness and other functional properties.

However, a fabric construction should have satisfactory functional properties allowing the products to act effectively in summer when the wearers, exposed to strong sunlight, tend to perspire profusely. Women, in particular, often wear clothes with long sleeves to avoid a suntan, and therefore, women's clothes are required to have particularly good properties including a high air permeability and comfort. Mesh-type fabrics are available to achieve a high air permeability, but are not widely used because the skin or underwear can be seen through them, or because the wearers may suffer from a mesh-like tan.

Recently, many types of closely-woven fabrics with a moisture permeability and water repellency have been made commercially available as materials for sportswear, rainwear and umbrellas, but these fabrics have a low air permeability (windbreak performance) and thus are regarded as completely different from the fabrics produced by the process of the invention, which have a high air permeability. Materials with a low air permeability cannot provide the comfort associated with air permeability, even though showing a good windbreak performance.

For certain applications fabrics having a special overlapping structure, in which a plurality of overlapping steps are interconnected so as to provide openings between the strips, have been used.

Fabrics having such an overlapping structure are disclosed in JP-A-57-46393. The fabrics, for rainwear, comprise many long strips of waterproof cloth cut in the direction of the weft, placed in overlapping relationship with one another and continuously stitched, intermittently adhered or intermittently fused in the direction of the warp.

GB-A-2025194 discloses a soil covering sheet, for use in growing crop plants, comprising a plurality of overlapping sheets connected together only by a plurality of tapes or strings secured to each strip and running transversely across each strip.

FR-A-867813 describes fabrics having an overlapping structure in which parallel strips of material overlap to a small extent with one another to provide a narrow elongate overlap portion between the fabrics within which the fabrics are glued together at longitudinally spaced apart regions along the overlap portion, thus leaving openings between the glued regions.

Each of the above fabrics is produced merely by laying strips of material in overlapping relationship and then permanently interconnecting them.

To the applicants' knowledge there are no fabrics available which are highly fashionable as well as having a high air permeability, together with a light screening ability and waterproofness, as these properties generally conflict with each other.

Fabrics having a high air permeability together with a light screening ability and waterproofness as described above, if made available, will be useful not only for clothing but for a wide variety of applications, in addition to clothing, in various industrial areas.

As a solution to the conventional technical problems described above, the invention provides a process for providing, in a practically useful manner, fabrics having an overlapping structure, which have a high air permeability together with a good light-screening ability and high waterproofness.

In the case of clothing, for example, the invention allows the production of fabrics suitable for producing fabrics having a special structure suitable for providing functional and fashionable clothing with characteristic features not available from conventional clothing, including the ability to prevent exposure of the skin of the wearer directly to sunlight or rain and to maintain a high air permeability preventing tanning of the skin, allowing the wearer to feel cool and comfortable in summer and yet still providing a garment having a unique and fashionable appearance.

Clothing having such an overlapping structure is suitable for outdoor wear, including sportswear such as golf wear, baseball uniforms, baseball undershirts, and tennis wear, casual articles such as T-shirts and polo shirts, and rainwear such as a raincoat.

In addition to these clothing articles, fabrics having such a structure can provide various other unique articles if good use is made of the functional characteristics obtained from their unique fabric structure.

Various unique materials made of such fabrics can provide different novel products not currently available in each relevant area, including various clothing articles other than those stated above, bedclothes, earth and sand fixing sheets, agricultural and horticultural greenhouses, footwear, perishables storage containers, beach umbrellas, tents, partitions, filtering materials, chair covers, and curtains.

Thus, the process of the invention allows the production of fabrics having the following features.

They have a special structure which consists of a large number of overlapping narrow strips which are connected to form a fabric in such a way that the overlapping portions provide openings in the direction of the width of the narrow strips.

In the process of the invention for producing fabrics with the special structure, narrow strips are placed one on top of another while displacing them so that they partially overlap each other to form an overlapping struc-

Skechers EX1013-p. 106
Skechers v Nike

ture, and then adjacent narrow strips are connected while maintaining that structure, to thereby produce a fabric.

The articles which can be constructed from fabrics produced by a process in accordance with the invention include clothes, various clothing items other than clothes, bedclothes, earth and sand fixing sheets, agricultural and horticultural greenhouses, footwear, perishables packaging materials, beach umbrellas, tents, partitions, filtering materials, chair covers and curtains.

With such features as described above, fabrics having an overlapping structure consisting of narrow strips, as proposed herein, can provide the desirable actions and effects as described below.

(1) When used as material for clothes, they prevent the skin of the wearer from suffering from tanning or roughness, because they intercept direct sunlight.
(2) They serve to produce comfortable clothes which have a high air permeability but prevent the skin from being seen.
(3) They have a light-screening ability, waterproofness and moisture permeability together with a high air permeability.
(4) They have an uneven surface which provides a three-dimensional, dry appearance, and serve to produce clothes without a sticky touch to the skin of the wearer.
(5) When combined with other materials of different types or colors, they can have multiple functions with a very high fashionability not available from conventional fabrics.

With such a number of features as described above, fabrics produced by a process of the invention provide materials for a variety of clothing items including sportswear such as golf wear, tennis wear, baseball uniforms and baseball undershirts, rainwear such as raincoats, casual clothes such as summer sweaters, T-shirts and polo shirts, caps, hats and gloves.

In addition to these applications, they can effectively provide materials for bedclothes, earth and sand fixing sheets, agricultural and horticultural greenhouses, footwear, perishables packaging materials, beach umbrellas, tents, partitions, filtering materials, chair covers, and curtains, as described above.

Preferred embodiments of the invention will now be described in more detail with reference to the accompanying drawings in which:

Fig. 1(A) shows a cross section of a fabric produced by a process of the present invention which consists of overlapping narrow strips connected to each other. The cross section schematically shows the fabric's special structure which is like a tiled roof. Fig. 1(B) illustrates a cross section of a non-connected portion of a fabric where overlapping narrow strips are separated from each other. This cross section schematically shows that many narrow strips overlap each other with appropriate gaps (openings) maintained between adjacent strips.

Fig. 2 schematically illustrates a top view of a special fabric with the overlap structure as depicted in Figs. 1(A) and (B). As seen from this top view, the narrow strips are machine sewn together in the width direction of the strips along parallel lines aligned at regular intervals.

Fig. 3 schematically shows the external appearances of a raincoat made of a fabric with a special structure which will be described later in Example 2.

Fig. 4(A) and (B) gives an oblique view of a structural example consisting of narrow strips of a few different materials and colors.

In Fig. 5 a cross section of a fabric structure which is not based on the present invention is illustrated schematically to show the difference thereof from a structure produced by a process of the invention.

Fig. 6(A), (B), (C), (D) and (E) gives cross sections of non-sewn portions of various types of fabrics with special structures consisting of narrow strips as proposed herein.

Fig. 7(A), (B) and (C) gives cross sections of non-sewn portions of other various types of fabrics with special structures consisting of narrow strips as proposed herein.

Fig. 8 illustrates an example of assembling a temporarily-fixed overlap structure as a step in a process of the invention for producing a fabric with an overlap structure.

Figs. 9-13 illustrate various articles made particularly of fabrics with a special structure produced by a process of the invention. Specifically, Figs. 9-13 show examples of bedclothes, earth and sand fixing sheet, agricultural or horticultural greenhouse, footwear, and perishables storage bag, respectively.

A fabric which may be produced by a process of this invention has a special structure which consists of a large number of narrow strips which overlap each other and are connected to form a fabric sheet in such a way that the overlapping portions provide openings in the direction of the width of the narrow strips.

Any kind of narrow strip in a sheet form with a smaller width than length can serve for the invention, and there are no specific limitations on their widths. In general, desirable materials include woven, knitted or non-woven fabric, film and plastics in the form of thin sheet with a width of 1-200 mm. Of these materials, woven, knitted and non-woven fabrics are most desirable because they can maximize the effect of the invention and can be handled easily when manufacturing products. Knitted, woven and non-woven fabrics are particularly desirable when used to produce such articles as clothes, other clothing items, bedclothes, perishables storage containers, beach umbrellas and tents.

However, the optimum width of narrow strips as described above should vary with the actual application of the fabrics produced by the process of the invention. For

Skechers EX1013-p. 107
Skechers v Nike

large-size articles such as large-type agricultural or horticultural greenhouses and large-type earth and sand fixing sheets, for example, the optimum width of the narrow strips used may be greater than the width range described above.

Also, desirable materials for narrow strips may vary with application. High-strength non-woven fabrics, film or thin plastic sheets may be desirable for such articles as agricultural or horticultural greenhouses, earth and sand fixing sheets and filter mediums.

Concerning production methods, narrow strips of woven fabric, for example, may be obtained by directly producing narrow strips with a desired width with a ribbon or tape weaving machine, or by producing a fabric with a wide fabric weaving machine followed by melt-cutting to a desired width on the weaving machine or with a melt-cutter, or by weaving soluble fiber into a fabric along parallel lines followed by treating the fabric with solution that dissolves the soluble fiber to provide narrow fabric strips with a desired width. Practically, an appropriate production method may be selected after considering the ease of the production operations and the specifications of the required narrow strips. For any type of material, including woven, knitted or non-woven fabrics, film and thin plastic sheets, proper narrow strips may be obtained either by producing large sheets and then cutting them into strips, or by directly producing narrow strips.

The desirable width range for these narrow strips is as described above. A more detailed explanation is given below concerning their application to clothes, other clothing items, bedclothes, and other small articles such as footwear and perishables storage containers. Widths smaller than 1 mm are generally undesirable because it is difficult to produce such narrow strips, and because it is usually difficult to form a fabric from such narrow strips. Widths greater than 200 mm are also generally undesirable because the resultant fabrics may not be significantly better than conventional fabrics with respect to functional and fashionable features as well as air permeability, which is the most important property of the fabrics produced by the process of the invention. Thus, widths of 2-100 mm, or 5-70 mm in particular, are desirable for these articles.

These narrow strips may have an irregular cross section with a moderately uneven or wavy surface. For example, the cross section may be either a flat rectangle or in the form of "A", ">", or combinations of these shapes such as "W", or may have other bent forms such as "}", "}", "}", "}", "}", "}", "{", "{" and "~". These narrow strips generally may be single-layer sheets, but also may be double-layer sheets such as tubes and double fabrics. Here, the width of a tube-like strip is defined as its diameter.

Where applied to articles used in contact with the skin, including clothes and other clothing items, narrow strips are preferably of a fiber material such as woven, knitted or non-woven fabric, because they are agreeable to the touch. Desirable fibers used as a base material for these narrow strips are synthetic fibers including polyethylene terephthalate and its copolymers (including, e.g., copolymers with isophthalic acid or 5-sodium sulfoisophthalate), polybutylene terephthalate and its copolymers, other various polyesters, polyamides such as nylon 6, 11, 12, 66 and 610 and their copolymers, acrylic polymers, polyurethane, polyethylene, ultra-high molecular weight polyethylene, polypropylene, their copolymers, and polyvinyl alcohol; regenerated cellulosic fibers including rayon and cuprammonia rayon; semi-synthetic fibers including acetate and triacetate, and natural fibers including cotton, hemp, silk and wool. These fibers may be used separately or in combination in the form of composite, combined filament yarn fabric, blended yarn fabric, twisted union yarn fabric or mixed-woven fabric.

Of these, narrow strips of composite yarn of polyester fiber and polyamide fiber, those of composite yarn of high shrinkage polyester-isophthalic acid copolymer fiber combined with other types of fibers such as low shrinkage fibers, and those of water-sensitive fibers made by spinning of low-saponification value polyvinyl alcohol are particularly desirable because they can shrink during processing to form a bulky fabric, leading to favorable bulky, dry-touch textures. As a result, the fabric will not cling to the skin and has a large porosity. Also, the fabric will have a higher air permeability and will be agreeable to the touch, making it possible to produce very comfortable clothes. Another way of obtaining bulky fabrics is to form narrow strips using bulky yarns such as woolen yarns produced from single multifilaments.

A fabric with an "overlap structure" of narrow strips as proposed herein consists of many narrow strips overlapping each other like a tiled roof. Its cross section is like that of a mino (straw raincoat).

Unique effects and functional features resulting from such a structure are explained below with reference to the drawings.

Figure 1(A) shows a cross section of sewn narrow strips that constitute a fabric with a special overlap structure which can be produced by a process of the invention, and schematically illustrates narrow strips S_1, S_2, S_3, S_4, S_5, S_6 and S_7 overlapping each other to form a structure like a tiled roof or a mino. Fig. 1(B) shows a cross section of a non-sewn portion of narrow strips that constitute a fabric with a special overlap structure, and further schematically illustrates narrow strips S_1, S_2, S_3, S_4, S_5, S_6 and S_7 overlapping each other with proper gaps therebetween.

As seen from these drawings, a fabric which can be produced by a process of the invention consists of many (more than one) narrow strips which overlap each other while maintaining an opening in the width direction of the narrow strips.

With this special structure, suchafabric, when exposed to rain for example, prevents an ingress of rain

Skechers EX1013-p. 108
Skechers v Nike

drops (arrow b) while allowing air to flow therein (arrow c), leading to a high water repellence and high air permeability. Arrow a in Fig. 1(A) and (B) shows the "downward" direction.

Compared to this, Fig. 5 schematically shows a cross section of a fabric structure which is not produced by a process of the present invention. The overlap structure given in Fig. 5, in which many narrow strips S_1, S_2, S_3, ... overlapping each other are bonded to base sheet B, has no openings in the width direction in the overlap portion of the narrow strips. Such a structure cannot increase the air permeability as indicated by arrow c in Fig. 1(B), even though it serves to repel raindrops as indicated by arrow b, and thus it cannot achieve a high air permeability together with a light-screening ability and waterproofness as intended in the present invention. In this example, a high air permeability could not be achieved even if an air permeable fabric is used as the base sheet B. In any case, a structure comprising a base sheet is obviously different from the fabrics of the invention with respect to expected effects.

Figure 2 schematically shows, as an example, a top view of a special fabric with an overlap structure as given in Fig. 1(A) and (B). The fabric in Fig. 2 consists of narrow strips sewn downward in the width direction thereof, and these strips are sewn with a machine along dashed lines 1, 2, 3 and 4. The cross section indicated by d-d along one of the sewing lines in Fig. 2 corresponds to that shown in Fig. 1(A), and the cross section e-e, which is spared from the sewing lines, corresponds to that given in Fig. 1 (B).

The narrow strips of a fabric having a special structure produced by a process of the invention may overlap each other either regularly or irregularly with varying overlapping widths, as long as a proper overlapped structure is maintained.

Figures 6 and 7 illustrate a cross section of a non-sewn portion of narrow strips contained in some variations of the basic fabric S produced by a process of the invention. Fig. 6(A), (B) and (C) shows an example in which narrow strips with a "A"-shaped cross section and the narrow strips in Fig. 6(D) and (E), although in a flat form, overlap each other irregularly, unlike the case shown in Fig. 1. Two adjacent strips form a repeating overlap pattern in Fig. 6(D), but a repeating pattern consists of three strips in Fig. 6(E). The examples in Fig. 7 (A), (B) and (C) show two layers (inside layer and outside layer), each of which has an overlap structure consisting of narrow strips.

Various process embodiments are available for producing fabrics with an overlap structure consisting of many narrow strips. The most practical way may be to put narrow strips one on top of another while slightly shifting their positions to form an overlap structure, followed by connecting them temporarily by adhesive while maintaining the overlap structure.

More specifically, narrow strips impregnated with a water-soluble adhesive (such as an adhesive based on polyvinyl alcohol or acrylic resin) may be put one on top of another on a tube or other appropriate supporting roll with a surface coated with, for instance, fluoroplastics such as polytetrafluoroethylene while rotating the tube so that the strips are put one on top of another with a slight misalignment therebetween, followed by drying and cutting along the axis of the tube to provide a sheet with an overlap structure consisting of temporarily bonded narrow strips. A fabric sheet consisting of temporarily bonded strips thus obtained is then sewn in the "downward" direction, in which the strips will not be turned up during the sewing operation, along lines at required intervals, in order to fix the narrow strips with regular shifts or irregular shift maintained therebetween. Then, the fabric sheet is immersed in heated water to dissolve and remove the water-soluble adhesive used for the temporary bonding, to form a fabric with an overlap structure produced by a process of the present invention.

This is explained in more detail below with reference to the drawings. Figure 8 illustrates a process that effectively produces a sheet consisting of temporarily bonded narrow strips. In the Fig. 8, a guide 12 moving at a constant speed and tension rolls 13 and 14 are provided near a cylinder 11, which rotates at a constant speed, and narrow strips 16 wound on a collared bobbin 15 are supplied through rolls 13 and 14 and guide 12, so that the narrow strips 16 are wound up on the constantly rotating cylinder 11 with a desired overlap therebetween.

In Fig. 8, a temporary bonding adhesive tank 18 and squeezing roll 17 are provided so that narrow strips impregnated with the temporary bonding adhesive form an overlap structure on the cylinder, followed by drying the temporary bonding adhesive in hot air supplied though hot water outlet 19 to ensure a temporary fixing. Thus, a temporary fixing is achieved during and/or after the winding of the narrow strips on the cylinder.

In view of the expected effects and workability, a water-soluble adhesive such as one based on polyvinyl alcohol or acrylic resin may be most desirable for the temporary fixing. An aqueous solution prepared by diluting the adhesive to an appropriate concentration may be applied to the narrow strips during and/or after the winding of the narrow strips on the cylinder, followed by drying. This may be performed while separating the strips from the cylinder. The application may be carried out by impregnation or an appropriate spreading process such as spraying, padding or brushing. A suitable process may be selected after considering its workability or other features. The narrow strips which are temporarily fixed by, for instance, exposure to normal temperature air or hot air after the application of the water-soluble adhesive are then cut or melt-cut in the transverse direction and removed from the roll to provide a fabric sheet with an overlap structure consisting of temporarily fixed narrow strips.

Next, the temporarily bonded narrow strips in the fabric with an overlap structure are connected together.

Skechers EX1013-p. 109
Skechers v Nike

Skechers EX1013-p. 110
Skechers v Nike

There are no specific requirements for the connecting method to be used. The use of a sewing machine is generally desirable because of its high availability. For instance, it is desirable to sew the narrow strips in their width direction along parallel lines aligned at appropriate intervals to combine the strips. In this case, the strips should preferably be sewn "downward", or in such a direction that the strips will not be turned up during sewing. There are no specific requirements for the intervals between sewing lines, and an appropriate interval may be selected depending on the use and purpose of the fabric. Also, there are no specific requirements for the sewing pattern, and appropriate pattern such as a linear, checked, checkered or cross-stitched pattern may be selected depending on the use and purpose of the fabric. Sewing may be carried out by a general-use sewing machine with one needle or by a multiple-needle sewing machine, suchasa kilting machine, that can sew along several lines simultaneously.

Another way of combining the narrow strips is the use of a high-frequency or supersonic sewing machine.

The use of a sewing machine is not the only way available for combining the narrow strips, but it may also be effective to use an adhesive for bonding them together. The use of a sewing machine, however, is desirable in most practical cases because it can combine them in the downward direction of the overlap structure, which serves to minimize the number of wrinkles and is easy to perform.

Also, they may be combined by continuous or discontinuous fusion bonding with thermoplastic fiber. A fusion bonding method using vibrational energy caused by supersonic wave may be useful in most cases.

Where narrow strips are combined by sewing into a fabric, a tape for reinforcement may be put on the sewing line, followed by sewing of the narrow strips together with the reinforcing tape. Furthermore, it may also be desirable to perform ironing and/or heat-pressing in the downward direction of the overlap structure after forming a fabric to further reinforce the overlap structure.

A fabric obtained by such processes as described above is then subjected to another process to remove the temporary bonding. When a water-soluble adhesive is used for temporary bonding, the water-soluble adhesive used for the temporary bonding is removed by immersing the fabric in hot water to dissolve the adhesive. In this case, appropriate agents such as desizing agents, antistatic agents and softening agents, may be used. After adequate desizing for complete removal of the temporary adhesive, the narrow strips are dried in air or hot air to form a fabric with such a structure as shown in Fig. 1(A) or (B).

The process for removing the temporary bonding of narrow strips overlapping each other may be performed after producing secondary products from the fabric sheet consisting of temporarily bonded narrow strips. For instance, secondary products such as clothes or other clothing items may be produced from fabric sheets consisting of narrow strips combined in a temporarily-bonded state, followed by treatment of the products in a process for dissolution and removal of the water-soluble adhesives. Such a procedure, in which temporary bonding is removed after the production of secondary products, may be more desirable in most practical cases because of the ease of operations for producing the secondary products.

It also may be desirable to subject a fabric produced by a process of the present invention to a water repellency treatment depending on the use of the fabric. Water repellency treatment can be easily carried out by applying an appropriate agent, such as silicone- or fluorine-based one, by means of spraying, padding, immersion or coating. In particular, padding is most desirable because it can apply a water repellency agent uniformly and also because its application in the downward direction of the overlap structure, as in the case of sewing as stated above, can be effective for preventing the formation of wrinkles. Thus, the padding process may be the best due to these advantages.

In producing such various secondary products as stated above from fabrics with an overlap structure consisting of narrow strips as proposed herein, such fabrics may be used solely or together with other fabric materials.

Such other fabric materials should preferably be appropriate general-use plain fabrics. In case of such secondary products as clothes and other clothing items, it may be desirable that an appropriate plain fabric be used at portions that are frequently subjected to strong bending motion while a fabric of the invention be used at flat portions that are free of strong bending motion. In rainwear, for instance, conventional waterproof material may be used at such portions as shoulders, knees and elbows, while using a fabric with an overlap structure the invention at other flat portions in order to maximize the effect of the fabric of the invention.

Figure 3, for example, schematically illustrates the appearance of a raincoat of a fabric with an overlap structure produced by sewing as described later in Example 2. Plain waterproof sheets made of high-density fabric 5 are used at flexible portions such as the collar, shoulders and elbows while fabric with an overlap structure 6 is used at other flat portions. This examples shows how both the characteristics of a fabric with an overlap structure and those of another material can be effectively exploited.

Where a raincoat is produced solely from a fabric with an overlap structure, combined-woven fiber with a low melting point may be used as material for narrow strips, and the fabric used at flexible portions such as collar, shoulders and elbows as stated above is heat-treated to melt and join the low melting point components so that the waterproofness is improved due to blinding, joining and increased density.

Where fabrics with an overlap structure are used for the production of such secondary products as clothes

and other clothing items, it may be practical to use the fabric in such a way that the downward direction of the overlap structure is virtually consistent with the downward direction of the secondary products. Note, their use is not limited to such a direction, and they may be used in any other arrangement depending on such factors as fashion and appearance.

As described above, the fabrics produced by a process of the invention have an overlap structure consisting of narrow strips which can shade direct sunlight and ensure high air permeability. Furthermore, the process can impart to the fabrics other desired properties such as water repellency, oil repellency and moisture permeability by performing appropriate treatment steps. They also can have many other good features including dry, rough surface textures and unique appearance and may be fashionable and therefore can be useful for a variety of applications including sportswear such as golf wear, tennis wear, baseball uniforms and baseball undershirts; rainwear such as raincoats; casual clothes such as summer sweaters, T-shirts and polo shirts; and other articles such as caps, hats and gloves.

The fabric and secondary products, including clothes and other clothing items, with an overlap structure may be of reversible type. Thus, such fabrics can provide very unique material and products including clothes and other clothing items having two useful sides.

Where narrow strips having two sides each of which are made of different materials, such as material 7 mainly for one side of the strips and material 8 mainly for the other side in Fig. 4(A), it will be easy to produce clothes having an outer surface and an inner surface each of which have a different characteristic from each other. Such narrow strips may be produced easily from, for instance, a double-woven fabric. In a typical case, such as fiber as cotton may be used as material for the inside surface thereof (in contact with the skin) and a water repellent material such as polyester may be used for the outside surface thereof. In another example, the fiber used in the outside surface of the narrow strips may be different from that used in their inside surface with respect to shrinkability and other properties. In such a case, the narrow strips may have a bent structure such that large openings may be formed between the strips so that the resultant fabric can have a high air permeability.

Where each narrow strip consists of two narrower strips made of different materials each arranged in a side by side structure in a widthwise direction, as shown in Fig. 4(B), material 9 used for the upper half thereof and forming the inside surface of the resultant fabric, may be cotton fiber while material 10 used for the lower half thereof may be water-repellent polyester fiber. In this case, a synergetic effect due to two different properties, i.e., sophisticated touch and water repellency, can be achieved very effectively. Where a narrow strip consists of two narrower strips of different materials as described above, the boundary between the two materials may not be consistent with the middle line, but the boundary line may be at any desirable position in the width direction.

To produce a fabric with an overlap structure particularly high in bulkiness and air permeability, narrow strips of polyurethane fiber may be temporarily combined under an appropriate tension followed by sewing of the strips and removal of the temporary bonding to form a fabric with an overlap structure. In such a fabric, the narrow strips will have a wavy form, resulting in large gaps between them. Another good way of obtaining large gaps is by placing narrow strips of polyurethane fiber and those of other fiber one on top of another alternatingly while applying a tension to the polyurethane fiber strips followed by the formation of a fabric and removal of the temporary bonding so that the two types of strips have different wavy shapes.

A fabric with large gaps may also be produced effectively by combining narrow strips of high shrinkable fiber and those of low-shrinkage fiber appropriately, followed by heat treatment. Large gaps may be formed due to the difference in the degree of shrinkage between the two types of strips.

Highly fashionable, colorful fabrics or secondary products, including clothes and other clothing items, may be obtained by using a fabric having an overlap structure consisting of narrow strips of different colors or having an overlap structure consisting of narrow strips which have two sides with different colors and or which have different colored portions formed in the widthwise direction as illustrated in Fig. 4(A) and (B).

Furthermore, a fabric with novel functional and colorful features that are not available in conventional fabrics may be produced by combining several types of narrow strips which are different in color, material and other properties.

Where a fabric with an overlap structure is used to form clothes or other clothing items, the number of narrow strips used in a piece of clothes or a clothing item is preferably in the range of 2 (incl.) to 1500 (incl.), more desirably in the range of 2 (incl.) to 1000 (incl.), and still more desirably in the range of 5 (incl.) to 700 (incl.). Several narrow strips, up to 30 or so, are preferably present in every 10 cm length of fabric.

The use of too many narrow strips is not desirable because it may lead to problems such as a lower fabric strength, lower number of effective gaps for ventilation due to an increased number of strips per unit length of the resultant fabric, and increased weight of the fabric.

There are no specific requirements for the size of each narrow strip, but those with a surface area of 1.1 mm^2 - 5×10^4 mm^2 are generally desirable for small articles including clothes and other clothing items. It is generally difficult to produce a desired overlap structure from narrow strips with a surface area of less than 1.1 mm^2, but a fabric consisting of narrow strips larger than 5×10^4 mm^2 will lose its good features and has

Skechers EX1013-p. 111
Skechers v Nike

fewer significant differences from conventional plain fabrics, though the desirable strip size varies with the application of the resultant fabric.

The fabrics with an overlap structure can be applied to a wide variety of articles, as described below.

Firstly, completely novel bedclothes with a high air permeation for good ventilation, together with a favorable heat insulation and which are fashionable, can be produced from a fabric with an overlap structure.

More specifically, novel bedclothes, including blanket and bed sheet fabric and side cloth for futon (Japanese quilt), pajamas, nightdresses, nightgowns, bathrobes, and pillowcases, particularly for summer use can be produced.

For such articles as bed sheets, pajamas and towel-cloth blankets, in particular, it is desirable to use narrow strips of cotton towel cloth because comfortable products with an agreeable touch can be produced. Where an article made solely of such towel cloth strips may have some problems, including a lack of effective gaps and excessive flexibility causing the fabric to cling to the skin, it may be desirable that appropriate narrow strips of, for instance, woven, knitted or non-woven fabric more firmly formed with a stronger nerve than the towel-cloth strips be used in combination with the towel-cloth strips in an alternating arrangement in a checked pattern or in other appropriate ways.

Furthermore, bedclothes with multiple functions can be produced by using several types of narrow strips of different materials in combination. For instance, bedclothes with an agreeable dry touch and good water absorbing ability can be produced by combining narrow strips made of polyester thread with those of cotton.

The bedclothes of the invention are produced by cutting and sewing a fabric with a special structure as described above. These bedclothes can be produced easily and in particular, those for summer use can ensure coolness and comfortability. Figure 9 schematically illustrates a towel-cloth blanket made of fabric S with an overlap structure.

Secondly, a novel soil and sand fixing sheet that has high water permeability and effectively hold soil and sand can be produced from a fabric with an overlap structure.

More specifically, it is possible to produce a soil and sand fixing sheet with a special structure that prevents soil and sand from flowing out therethrough, and serves to discharge soil water and rain water from the ground, while leaving an appropriate moisture in the ground.

Such soil and sand fixing sheets include drainage materials for building and engineering works for the construction of retaining walls, tunnels, roads, culverts, golf links, water supply/drain channels, slopes and weak ground treatment, other drainage materials such as for coal accumulation sites, and soil water removal sheets for flower pots.

Figure 10 schematically explains how a soil and sand fixing sheet of a fabric with an overlap structure can serve to hold soil and sand while retaining a high water permeability. Soil and sand layer 23 is supported by soil and sand fixing sheet 22, which comprises a fabric S with an overlap structure.

With such a unique structure, the soil and sand fixing sheet of such a fabric schematically shown in Fig. 10 maintains narrow gaps between the narrow strips, which provide channels for water drainage as indicated by arrows, while retaining particles in the ground layer, including soil and sand, which are greater than a certain size. In addition, with the multiple layer structure consisting of narrow strips, the sheet can work as a filter free of clogging. Thus, soil and sand fixing sheet 22 prevents soil and sand from flowing out while maintaining good performance for drainage and water permeation.

Based on this mechanism, fabrics with an overlap structure can serve as a filter for various applications.

Thirdly, fabrics with an overlap structure can be useful in producing novel agricultural or horticultural greenhouses which provide good ventilation and shade and are highly suitable for the cultivation of certain agricultural or horticultural plants.

No agricultural or horticultural greenhouses are available which are suitable for the cultivation of, for example, seedlings of such widely known foliage plants as benjamin tree, yucca, dracaena tree and concinna, which grow well in a well-ventilated, well-shaded environment free of direct sunlight. In general, conventional greenhouse materials with a good light screening ability have a low air permeability, and vice versa.

Unlike these, the fabrics with an overlap structure can serve to produce an agricultural or horticultural greenhouse which provide an effective shade while maintaining a good ventilation.

The agricultural and horticultural greenhouses of the invention are described in detail below.

The agricultural and horticultural greenhouses as proposed herein include covers, tents and greenhouses for protection and cultivation of seedlings of rice and vegetables for agricultural production; covers, tents and greenhouses for protection and cultivation of seedlings of other plants including foliage plants, flowers, garden trees and fruit trees; and other types and sizes of greenhouses.

Figure 11 schematically illustrates an example of greenhouse for seedlings of foliage plants and flowers as proposed herein. In Fig. 11, fabrics with a special structure of the invention are used as exterior materials including roofing for greenhouse 24.

For these agricultural and horticultural greenhouses in particular, the use of a combination of various narrow strips of different materials and colors will permit the construction of completely novel agricultural and horticultural greenhouses which have light-screening ability together with good ventilation and also has beautiful and fashionable appearance with various colors. By making use of such color features, it will also be easy to construct greenhouses which have different colors for iden-

Skechers EX1013-p. 112
Skechers v Nike

tification of the plants cultivated in them.

If narrow strips of an appropriate size and of an appropriate color or appropriate different colors are used at appropriate portions, greenhouses useful under various conditions can be produced, including those which absorb light efficiently to maintain a high temperature while keeping good ventilation, or which reflect light considerably to prevent the inside temperature from rising excessively. Greenhouses that provide various basic inside environments can be constructed by using a combination of narrow strips of appropriate sizes and appropriate different colors, for instance black, white, gray or transparent, at appropriate portions.

Fourthly, fabrics with an overlap structure are useful to produce functional, fashionable and comfortable footwear which has novel, fashionable appearance together with good waterproofness and high air permeability to permit the wearer to feel cool and dry especially in summer.

The footwear as proposed herein includes sports shoes, boots, slippers, sandals and other indoor footwear as well as various shoes for daily use.

Figure 12 schematically illustrates a cross section of shoe 25 comprising fabric S of the invention. Narrow strips with a hook-like cross section are used in this example.

For footwear of a fabric with an overlap structure, it may be practical to use a fabric produced by a process of the invention in such a way that the downward direction of the overlap structure virtually coincides with that of the footwear. However, there are no specific requirements for the use direction of the structure. Narrow strips may be used in any desired direction depending on the desired fashionable features and appearance.

Footwear of novel design an high fashionability that was not available in the past can be produced by using a combination of a large number of narrow strips which are different in color, hue and shade.

Furthermore, footwear with multiple functions can be produced by using a combination of narrow strips of different materials. For instance, footwear with many good properties including waterproofness, water absorption and air permeability can be produced by using double-woven fabric strips in which the inside layer to come in contact with the body is made of cotton while the other layer to be exposed to rain is coated with synthetic polymer film containing fine pores.

Fifthly, fabrics with an overlap structure serve to produce novel perishables storage containers that provide an environment which is well screened from sunlight, well ventilated and therefore suitable for the transportation and storage of perishables.

Conventional flexible containers, for instance, have been generally used for the transportation of powder and particle materials including livestock feed, but not for perishables including grain, vegetables, fruits, fish, shellfish and flowers because no materials have been available which can provide an environment suitable for their transportation. Fabrics with a special structure of the invention, however, serve to produce novel perishables containers which can provide an environment suitable for the transportation and storage of these perishables.

The perishables storage containers as proposed herein include all boxes, bags and tubes designed to contain perishables including perishable plants as well as perishable foods such as grain, vegetables, fruits, fish, shellfish and flowers in order to transport them by land, sea or air or to preserve or store them.

Figure 13 schematically illustrates an example of a tube-like bag for transportation which is made of a perishables storage material with an overlap structure. The side wall of storage bag 26 is made of fabric with an overlap structure S.

Such perishables storage containers have good functions and effects as described below.

(1) The fabrics serve to produce perishables transporting containers which prevent the contents from being exposed to direct sunlight and maintain good ventilation. Thus, these containers are highly suitable for the storage and transportation of vegetables and other foods which require good ventilation and shade.

(2) They serve for easy production of containers which have high waterproofness, light-screening ability and moisture permeability as well as high air permeability and therefore, they are highly suitable for the transportation of perishables.

(3) The use of a combination of various narrow strips of different materials and colors permits the production of novel containers for the transportation, preservation or storage of perishables with colorful and fashionable appearance.

With such a colorful feature, these fabrics serve for easy production of containers of different colors for easy identification of the contents such as vegetables and fruits.

(4) If narrow strips of an appropriate size and of an appropriate color or appropriate different colors are used at appropriate portions, it is possible to produce containers which maintain good ventilation while absorbing light efficiently to keep a high temperature or which reflect light considerably to prevent the inside temperature from rising excessively.

If a proper combination of various narrow strips of an appropriate size and appropriate different colors, for instance black, white, gray and/or transparent, is used at appropriate portions, it is basically possible to produce containers which provide any desired inside environment.

In addition to these, fabrics with an overlap structure can be applied to a wide variety of products including

Skechers EX1013-p. 113
Skechers v Nike

curtains, partitions and chair covering materials as well as beach umbrellas and tents with high air permeability to ensure coolness and comfortability.

Some examples are given below to further illustrate processes embodying the present invention.

Example 1

Narrow fabric strips 36 mm wide were woven with a ribbon weaving machine using 30-denier (D), 12-filament polyester yarn as warp and weft. The yarn density of the strips was 80 warp threads and 26 weft threads per centimeter.

The narrow strips were immersed in a water-soluble polyvinyl alcohol adhesive and then wound up on a cylindrical roll coated with fluoropolymer while rotating the roll at 1 m/min and shifting each strip by a required distance so that the width of the overlap between them would be 18 mm. The sheet thus obtained was then dried and cut in the direction of the axis of the roll to provide fabric in which the narrow strips were temporarily fixed with the above-mentioned water-soluble adhesive.

Then, the fabric sheet was sewn with a plurality of sewing yarns utilizing a conventional sewing machine in the width direction of the narrow strips and in the downward direction of the fabric (so that the narrow strips would not be turned up) by a plurality of sewing lines parallel to each other with a regular space of 43 mm interposed therebetween, followed by immersion in hot water of 80°C to dissolve and remove the water-soluble adhesive.

Thus, a fabric sheet with an overlap structure of the invention which had a width of 36 mm, overlap width of 18 mm and sewing line interval of 43 mm was obtained.

A piece of golf wear was produced from the fabric by sewing. Though it was sultry and the sunlight was strong on the day of testing, it was revealed that the fabric screened the skin from the sunlight effectively and had a high air permeability, and further, had a suitable handling touch and was very comfortable, demonstrating that the fabric was very suitable as material for golf wear.

Example 2

Narrow fabric strips 10 mm wide were woven with a ribbon weaving machine using, as warp and weft, mixed-yarns produced by combining conventional type polyester filament yarns (30D, 12F, shrinkage rate in boiling water 7%) and isophthalate- copolymerized polyester filament yarns (30D, 12F, shrinkage rate in boiling water 15%) and interlaced with each other by utilizing a air jet nozzle. The yarn density thereof was 56 warp threads and 20 weft threads per centimeter.

The strips were connected to each other temporarily with a water-soluble adhesive and sewn with a sewing machine in the width direction of the strips to form a fabric sheet by the same method as in Example 1. They were sewn with a plurality of sewing lines arranged in parallel to each other with an interval of 5 mm interposed therebetween.

Then, a high-pressure paddle dyeing apparatus was used to immerse the sheet in boiling water to dissolve and remove the water-soluble adhesive while allowing a difference in shrinkage rate to develop, followed by dyeing the sheet deep brown with a disperse dye by a conventional dyeing process. The dyed and dried fabric sheet was then subjected to treatment for water and oil repellency. The water and oil repellent agent used was Asahi Guard AG-710 Emulsion (supplied by Asahi Glass Co., Ltd.) in the form of 6% aqueous solution. It was used with 0.1% Sumitex Accelerator Acx (supplied by Sumitomo Chemical Co., Ltd.) as catalyst. The solution for water and oil repellent treatment was applied to the fabric in the downward direction by light padding, followed by drying at 100°C and heat treatment at 180°C for 30 seconds to provide the final fabric product.

The fabric was then used to produce a raincoat as schematically illustrated in Fig. 3 and the raincoat was subjected to a test. High-density waterproof plain fabric coated with a water repellent agent was used as material for the collar, shoulders and elbows.

It was demonstrated that the raincoat had good features including high air permeability, waterproofness, moistureproofness and was fashionable with an attractive surface, which features are not available in conventional commercial rain coats.

Example 3

Narrow strips of polyester yarn as described in Example 1 and those of Nylon 6 yarns that had the same dimensions as the former were attached alternatingly to a plate made of fluorine-contained polymer with an overlap width of 15 mm using the same water-soluble adhesive as used in Example 1.

After drying, they were sewn together by the same procedure as in Example 1 with sewing line intervals of 20 mm. Then, a paddle dyeing apparatus was employed to perform a hot water treatment at 80°C for dissolution and removal of the water-soluble adhesive and to dye the Nylon 6 strips yellow with an acid dye at 100°C, followed by drying.

A summer sweater was produced by sewing the fabric and worn for testing. Because of the overlap structure, the skin was not seen through the fabric, so it can be worn directly next to the skin. The fabric appeared moderately bulky and dry because of the difference in processing characteristics between the polyester and polyamide fiber. It had a suitable handling touch and high air permeability with a good tanning control ability. Furthermore, it had good properties and was fashionable, with a striped appearance with a combination of the yellow and natural color or off-white of the polyester.

Skechers EX1013-p. 114
Skechers v Nike

Example 4

Narrow towel-cloth strips 7 mm wide were woven using cotton threads as warp and weft.

The strips were immersed in a water-soluble polyvinyl alcohol adhesive and then wound up on a fluoropolymer-coated cylindrical roll rotating at such a speed as to produce fabric with a required width and with an overlap width of 3 mm.

A sheet thus obtained was dried and cut in the direction of the axis of the roll to obtain fabric consisting of narrow strips temporarily fixed with the above-mentioned water-soluble adhesive.

The sheet was sewn with a conventional sewing machine along lines aligned at intervals of 20 mm in the "downward" direction so that the strips could not be turned up to provide multi-layer fabric with an overlap structure.

The fabric was the used to produce a towel-cloth blanket for summer use as illustrated in Fig. 9. The blanket is fringed with conventional polyester fabric, which serves also for reinforcement. It was then immersed in hot water at 80°C to dissolve and remove the water-soluble adhesive.

Thus, a towel-cloth blanket was obtained in which 7 mm-width strips forming an overlap structure with a overlap width of 3 mm as illustrated in Fig. 1 were sewn together along parallel lines aligned at intervals of 20 mm. Although it was very sultry on the night of the test and one would have been unable to sleep well under a conventional blanket, the towel-cloth blanket, with moderate heat insulation and dry surface texture together with a high air-permeability and moisture permeability, was found to be very comfortable and highly suitable for summer use.

Example 5

Narrow fabric strips 20 mm wide were produced with a tape weaving machine using 500-denier, 36-filament polyester yarn and 250-denier, 48-filament polyester yarn as warp and weft, respectively.

The strips were immersed in a water-soluble polyvinyl alcohol adhesive and then wound up on a cylindrical roll coated with fluorine contained polymer rotating at such a speed as to produce a sheet with a required width and with an overlap width of 7 mm. A sheet thus obtained was dried and cut in the direction of the axis of the roll to obtain fabric consisting of narrow strips temporarily fixed with the above-mentioned water-soluble adhesive.

The temporarily fixed sheet was double-sewn with an industrial sewing machine along parallel lines aligned at intervals of 20 mm in the "downward" direction so that the strips would not be turned up, in order to provide multi-layer fabric with an overlap structure as illustrated in Fig. 1(A) and (B). The fabric was then immersed in hot water at 80°C to dissolve and remove the above-mentioned adhesive.

Thus, a sheet was obtained in which 20 mm-width strips forming an overlap structure with a overlap width of 7 mm as illustrated in Fig. 10 were sewn together along parallel lines aligned at intervals of 20 mm.

The sheet was compared with coarse-pitch needle-punched non-woven fabric which had been used conventionally for retention of soil and sand.

These two fabric sheets were subjected to a test. Weak soil and sand containing much water was put on each sheet under the same conditions to determine their water discharge ability. It was shown that the soil and sand fixing sheet produced by the process of the present invention discharged water without allowing the soil and sand to flow away but leaving an appropriate moisture, while the conventional needle-punched non-woven sheet allowed large amounts of soil, sand an water to flow away with some holes clogged, indicating that the latter was failed to work well.

Example 6

Narrow fabric strips 25 mm wide were produced with a tape weaving machine using 50-denier, 24-filament nylon yarn and 100-denier, 48-filament nylon yarn as warp and weft, respectively.

The strips were immersed in a water-soluble polyvinyl alcohol adhesive and then wound up on a fluoropolymer-coated cylindrical roll rotating at such a speed as to produce a sheet with a required width and with an overlap width of 4 mm. A sheet thus obtained was dried and cut in the direction of the axis of the roll to obtain fabric consisting of narrow strips temporarily fixed with the above-mentioned water-soluble adhesive.

The sheet was sewn with a conventional sewing machine along parallel lines aligned at intervals of 20 mm in the "downward" direction so that the strips wound not be turned up, in order to provide multi-layer fabric with an overlap structure.

The fabric was then immersed in hot water at 80°C and then washed in water to dissolve and remove the above-mentioned adhesive. The fabric thus obtained was dried to provide a sheet in which 25 mm-width strips forming an overlap structure with an overlap width of 4 mm as illustrated in Fig. 1(A) and (B) were sewn together along parallel lines aligned at intervals of 20 mm.

The sheet was then used to construct a horticultural greenhouse as schematically illustrated in Fig. 11, and foliage plants were cultivated in it. It was revealed that the greenhouse was able to provide a well-shaded, well-ventilated environment highly suitable for the cultivation of foliage plants. The plants grew rapidly without withering.

Example 7

Narrow fabric strips 12 mm wide were produced with a tape weaving machine using 50-denier, 24-fila-

Skechers EX1013-p. 115
Skechers v Nike

ment nylon yarn and 100-denier, 48-filament nylon yarn as warp and weft, respectively.

The strips were immersed in a water-soluble polyvinyl alcohol adhesive and then wound up on a fluoropolymer-coated cylindrical roll rotating at such a speed as to produce a sheet with a required width and with an overlap width of 6 mm.

A sheet thus obtained was dried and cut in the direction of the axis of the roll to obtain fabric consisting of narrow strips temporarily fixed with the above-mentioned water-soluble adhesive.

The fabric sheet was sewn with a conventional sewing machine along parallel lines aligned at regular intervals of 20 mm in the "downward" direction so that the strips would not be turned up.

The fabric was then immersed in hot water at 80°C to dissolve the above-mentioned adhesive. The fabric thus obtained was dried and treated for water and oil repellency.

The water and oil repellent agent used was Asahi Guard AG-710 (Asahi Glass Co., Ltd.) in the form of 5% solution. The fabric was introduced into the solution in a downward direction of the multi-layer structure and wrung lightly in a mangle, followed by drying at 90°C for 5 minutes and curing at 150°C for 3 minutes to provide a fabric sheet with a special overlap structure produced by the process of the invention as shown in Fig. 1(A) and (B) which consists of 12 mm-width narrow strips forming overlaps with an overlap width of 6 mm and sewn together along parallel lines aligned at intervals of 15 mm.

The sheet was then used to produce low shoes for summer use as illustrated in Fig. 12. They were fringed with conventional synthetic leather, which served also for reinforcement.

The shoes were put on for testing. Though it was very sultry and conventional shoes would have been very stuffy on the day of test, it was demonstrated that the low shoes with an overlap structure very comfortable and suitable for summer use because of high air permeability, moisture permeability and waterproofness and also because the fabric with a slightly rough surface was agreeable to the touch.

Example 8

Narrow fabric strips 30 mm wide were produced with a tape weaving machine using 500-denier, 36-filament polyester yarn and 250-denier, 48-filament polyester yarn as warp and weft, respectively.

The strips were immersed in a water-soluble polyvinyl alcohol adhesive and then wound up on a fluoropolymer-coated cylindrical roll rotating at such a speed as to produce a sheet with a required width and with an overlap width of 6 mm. A sheet thus obtained was dried and cut in the direction of the axis of the roll to obtain fabric consisting of narrow strips temporarily fixed with the above-mentioned water-soluble adhesive.

The fabric sheet was sewn with a conventional sewing machine along parallel lines aligned at regular intervals of 20 mm in the "downward" direction so that the strips would not be turned up to provide fabric consisting of narrow strips temporarily fixed with the above-mentioned water-soluble adhesive.

The fabric was then immersed in hot water at 80°C and washed in water to dissolve and remove the above-mentioned adhesive, followed by drying. Thus, a fabric sheet with a special overlap structure as shown in Fig. 1(A) and (B) was obtained which consisted of 30 mm-width narrow strips forming overlaps with an overlap width of 6 mm and sewn together along parallel lines aligned at intervals of 20 mm.

The sheet was then used to produce a tube-like bag as schematically illustrated in Fig. 13, and the bag was subjected to a test for the transportation of vegetables. It was demonstrated that the bag was able to provide a well-shaded, well-ventilated environment highly suitable for the transportation and storage of vegetables. The vegetables under test were stored without withering for a long period of time.

POSSIBLE INDUSTRIAL APPLICATIONS

The fabrics with a special structure produced by the process of the present invention have high air permeability, light-screening ability and waterproofness, which are generally difficult to achieve simultaneously, and are also highly fashionable.

If used as material for clothing, it can form clothes with completely unique functions including the ability to prevent the skin of the wearer from being exposed directly to sunlight or rain water while maintaining very good ventilation and fashionable appearance.

For instance, the fabrics can be used as material for various clothes, especially for outdoor wear including sportswear such as golf wear, baseball uniform, baseball undershirts and tennis wear; casuals such as T-shirts and polo shirts; and rainwear such as raincoats.

As described previously, the fabrics produced by the process of the invention, with good features and functions, also serve as material for various clothing items other than clothes, namely bedclothes, soil and sand fixing sheets, agricultural and horticultural greenhouses, footwear, perishables storage containers, beach umbrellas, various tents, filters, chair coverings, partitions and curtains. Thus, they are useful for an extremely wide variety of products.

Claims

1. A process for producing a fabric (S) having a plurality of narrow strips ($S_{(1-7)}$) in overlapping relationship with one another, each strip having a longitudinal side portion overlapping with a longitudinal side portion of an adjacent strip, which strips are

Skechers EX1013-p. 116
Skechers v Nike

interconnected with one another to provide a fabric, but which fabric is provided with openings between the respective overlapping longitudinal side portions of each pair of adjacent strips, in which process

(1) a plurality of narrow strips (S_{1-y}) are arranged in overlapping relationship with one another so that each strip has a longitudinal side portion overlapping with a longitudinal side portion of an adjacent strip,
(2) each strip is temporarily secured, one to the next, by adhesive between overlapping side portions of each pair of adjacent strips,
(3) the strips are permanently interconnected with one another to provide a fabric; and
(4) the adhesive between the overlapping longitudinal side portions of each pair of adjacent strips is removed to provide openings therebetween.

2. A process according to claim 1, wherein strips, each carrying adhesive are received, in overlapping relationship with one another, by a take-up roller and carried through a drying station so as to activate the adhesive and secure temporarily each strip, one to the next.

3. A process according to claim 2, wherein

(a) a plurality of strips are arranged in overlapping side by side relation with one another,
(b) the strips impregnated with an adhesive,
(c) the overlapping strips are introduced under tension to a take-up roller, and
(d) the strips are carried through the drying station.

4. A process according to claim 2 or claim 3, wherein at the drying station, hot air is directed at the overlapping strips.

5. A process according to claim 4, wherein the hot air is directed to overlapping strip material taken up on the take-up roller.

6. A process according to any preceding claim, in which the additional step of cutting the strips laterally to provide fabric pieces is carried out.

7. A process according to claim 6, wherein the strips are cut prior to removal of the adhesive.

8. A process according to claim 7, wherein the strips are cut while the material is taken up by the take-up roller and is cut in a direction along the axis of the take-up roller.

9. A process according to any one of claims 6 to 8, wherein the lateral cutting is carried out at regions of the strips spaced apart from one another such that a fabric piece is obtained which, after removal of the adhesive, has a large number of narrow strips forming an overlapping structure and connected together while maintaining openings in the width direction of the narrow strips.

10. A process according to any preceding claim, wherein the width of the narrow strips is selected in the range of 1-200 mm.

11. A process according to any preceding claim, wherein several types of narrow strip (9, 10), each type being of a different respective material, are used in large numbers to form an overlapping structure.

12. A process according to claim 11, wherein different respective materials having respective heat shrinkage rates different from one another are used.

13. A process according to any preceding claim, wherein narrow strips made of a fibrous structure comprising mixed yarns including fibers having a high shrinkage and/or composite yarns comprising high shrinkage yarns and low shrinkage yarns are used.

14. A process according to any preceding claim, wherein narrow fibrous strips are used in which fiber mainly providing one surface of each strip is different from fiber mainly providing the opposite surface thereof.

15. A process according to claim 14, wherein fibres providing respective opposite surfaces of the strips have different respective shrinkage rates are used.

16. A process according to any preceding claim, wherein several types of narrow strip, each type being of a different color, are used to form an overlapping structure.

17. A process according to any preceding claim, wherein a large number of narrow strips with a water- or oil-repellancy are used to form an overlapping structure.

Patentansprüche

1. Verfahren zur Herstellung von Stoff (S) mit einer Anzahl schmaler Lamellen (S_{1-y}) in einander überlappendem Verhältnis, wobei jede Lamelle einen Längsseitenabschnitt aufweist, der den Längsseitenabschnitt der benachbarten Lamelle überlapt, die Lamellen miteinander zu Stoff verbunden sind, der Stoff jedoch mit Öffnungen zwischen den ent-

Skechers EX1013-p. 117
Skechers v Nike

sprechenden überlappenden Längsseitenabschnitten jedes Paars benachbarter Lamellen versehen ist, wobei bei diesem Verfahren

(1) eine Anzahl schmaler Lamellen ($S_{1...7}$) in einander überlappendem Verhältnis angeordnet werden, so daß jede Lamelle einen Längsseitenabschnitt aufweist, der den Längsseitenabschnitt der benachbarten Lamelle überlappt,
(2) jede Lamelle, eine an die nächste, durch Klebstoff zwischen den überlappenden Seitenabschnitten jedes Paars benachbarter Lamellen zeitweilig befestigt wird,
(3) die Lamellen dauerhaft miteinander verbunden werden, wodurch Stoff bereitgestellt wird, und
(4) der Klebstoff zwischen den überlappenden Längsseitenabschnitten jedes Paars benachbarter Lamellen entfernt wird, wodurch dazwischen Öffnungen entstehen.

2. Verfahren nach Anspruch 1, wobei die Lamellen, die jeweils Klebstoff tragen, in einander überlappendem Verhältnis von einer Aufnahmerolle aufgenommen und durch eine Trocknungsstelle befördert werden, so daß der Klebstoff aktiviert wird und jede Lamelle, eine an die nächste, zeitweilig befestigt wird.

3. Verfahren nach Anspruch 2, wobei

(a) eine Anzahl von Lamellen in einander seitlich überlappendem Verhältnis angeordnet wird,
(b) die Lamellen mit Klebstoff imprägniert werden,
(c) die überlappenden Lamellen unter Spannung zu einer Aufnahmerolle geführt werden, und
(d) die Lamellen durch die Trocknungsstelle befördert werden.

4. Verfahren nach Anspruch 2 oder 3, wobei an der Trocknungsstelle Heißluft auf die überlappenden Lamellen gerichtet wird.

5. Verfahren nach Anspruch 4, wobei die Heißluft auf das überlappenden Lamellenmaterial gerichtet wird,das auf der Aufnahmerolle aufgenommen wird.

6. Verfahren nach einem der vorstehenden Ansprüche, wobei der zusätzliche Schritt des seitlichen Trennens der Lamellen erfolgt, wodurch Stoffstücke bereitgestellt werden.

7. Verfahren nach Anspruch 6, wobei die Lamellen vor der Entfernung des Klebstoffs geschnitten werden.

8. Verfahren nach Anspruch 7, wobei die Lamellen geschnitten werden, wenn das Material von der Aufnahmerolle aufgenommen wird und in einer Richtung entlang der Achse der Aufnahmerolle geschnitten wird.

9. Verfahren nach einem der Ansprüche 6 bis 8, wobei das seitliche Schneiden in Bereichen der voneinander getrennten Lamellen erfolgt, so daß ein Stoffstück erhalten wird, das nach der Entfernung des Klebstoffs eine große Anzahl schmaler Lamellen aufweist, die eine überlappende Struktur bilden und miteinander verbunden sind, wobei in Breitenrichtung der schmalen Lamellen Öffnungen erhalten bleiben.

10. Verfahren nach einem der vorstehenden Ansprüche, wobei die Breite der schmalen Lamellen im Bereich von 1 bis 200 mm ausgewählt wird.

11. Verfahren nach einem der vorstehenden Ansprüche, wobei verschiedene Arten schmaler Lamellen (9, 10),von denen jede Art aus einem entsprechenden anderen Material ist, in großer Zahl für die Bildung der überlappenden Struktur verwendet werden.

12. Verfahren nach Anspruch 11, wobei entsprechende unterschiedliche Materialien mit entsprechenden voneinander verschiedenen Wärmeschrumpfungsraten verwendet werden.

13. Verfahren nach einem der vorstehenden Ansprüche, wobei schmale Lamellen aus faseriger Struktur verwendet werden, die gemischte Garne umfassen, die Fasern mit starker Schrumpfung und/oder Verbundgarne einschließen, die stark schrumpfende Garne und wenig schrumpfende Garne umfassen.

14. Verfahren nach einem der vorstehenden Ansprüche, wobei schmale faserige Lamellen verwendet werden, bei denen die Faser, die hauptsächlich eine Oberfläche jeder Lamelle bildet, von der Faser verschieden ist, die hauptsächlich die entgegengesetzte Oberfläche der Lamelle bildet.

15. Verfahren nach Anspruch 14, wobei Fasern, die die entsprechenden entgegengesetzten Oberflächen der Lamellen bilden, mit entsprechenden unterschiedlichen Schrumpfungsraten verwendet werden.

16. Verfahren nach einem der vorstehenden Ansprüche, wobei verschiedene Arten schmaler Lamellen für die Bildung der überlappenden Struktur verwendet werden, wobei jede Art eine andere Farbe hat.

17. Verfahren nach einem der vorstehenden Ansprü-

Skechers EX1013-p. 118
Skechers v Nike

che, wobei für die Bildung der überlappenden Struktur eine große Zahl wasser- oder ölabweisender schmaler Lamellen verwendet wird.

Revendications

1. Procédé de production d'un tissu (S) comportant plusieurs bandes étroites (S_{1-y}) à disposition relative de chevauchement entre elles, chaque bande comportant une partie latérale longitudinale chevauchant une partie latérale longitudinale d'une bande adjacente, lesquelles bandes sont reliées mutuellement entre elles de façon à fournir un tissu, mais ce tissu étant pourvu d'ouvertures séparant les parties latérales longitudinales respectives de chaque paire de bandes adjacentes qui se chevauchent, procédé selon lequel :

   (1) on dispose plusieurs bandes étroites (S_{1-y}) suivant une disposition relative de chevauchement entre elles, d'une façon telle que chaque bande comporte une partie latérale longitudinale chevauchant une partie latérale longitudinale d'une bande adjacente.
   (2) on fixe temporairement chaque bande à la suivante au moyen d'un adhésif disposé entre des parties latérales de chaque paire de bandes adjacentes qui se chevauchent.
   (3) on relie mutuellement les bandes d'une manière permanente entre elles de façon à fournir un tissu et
   (4) on élimine l'adhésif situé entre les parties latérales longitudinales de chaque paire de bandes adjacentes qui se chevauchent, de façon à ménager des ouvertures entre elles.

2. Procédé selon la revendication 1, selon lequel des bandes, portant chacune de l'adhésif, sont reçues par un rouleau récepteur suivant une disposition relative de chevauchement entre elles et sont transportées à travers un poste de séchage de façon à activer l'adhésif et fixer temporairement chaque bande sur la suivante.

3. Procédé selon la revendication 2, selon lequel :

   (a) on dispose plusieurs bandes suivant une disposition relative de chevauchement côte à côte entre elles,
   (b) on imprégne les bandes d'un adhésif,
   (c) on amène les bandes en chevauchement, sous tension, sur un rouleau récepteur et
   (d) on transporte les bandes à travers le poste de séchage.

4. Procédé selon la revendication 2 ou la revendication 3, selon lequel, au poste de séchage, de l'air chaud est dirigé sur les bandes en chevauchement.

5. Procédé selon la revendication 4, selon lequel l'air chaud est dirigé sur une matière formée de bandes en chevauchement reçue sur le rouleau récepteur.

6. Procédé selon l'une quelconque des revendications précédentes, selon lequel on exécute l'opération supplémentaire consistant à découper les bandes latéralement de façon à fournir des morceaux de tissu.

7. Procédé selon la revendication 6, selon lequel les bandes sont découpées préalablement à l'élimination de l'adhésif.

8. Procédé selon la revendication 7, selon lequel les bandes sont découpées alors que la matière est reçue par le rouleau récepteur et sont découpées suivant la direction de l'axe du rouleau récepteur.

9. Procédé selon l'une quelconque des revendications 6 à 8, selon lequel le découpage latéral est exécuté en des zones des bandes qui sont espacées entre elles, d'une façon telle qu'on obtient un morceau de tissu qui, après élimination de l'adhésif, comporte un grand nombre de bandes étroites formant une structure à chevauchement et reliées entre elles, tout en maintenant des ouvertures suivant la direction de la largeur des bandes étroites.

10. Procédé selon l'une quelconque des revendications précédentes, selon lequel la largeur des bandes étroites est choisie dans l'intervalle de valeurs de 1-200 mm.

11. Procédé selon l'une quelconque des revendications précédentes, selon lequel plusieurs types de bandes étroites (9, 10), chaque type étant en une matière respective différente, sont utilisés en des nombres élevés de façon à former une structure à chevauchement.

12. Procédé selon la revendication 11, selon lequel on utilise différentes matières respectives présentant des taux respectifs de retrait thermique qui sont différents entre eux.

13. Procédé selon l'une quelconque des revendications précédentes, selon lequel on utilise d'étroites bandes formées d'une structure fibreuse comprenant des fils mélangés comportant des fibres ayant un retrait élevé et/ou des fils composites comprenant des fils à retrait élevé et des fils à faible retrait.

14. Procédé selon l'une quelconque des revendications précédentes, selon lequel on utilise d'étroites bandes fibreuses dans lesquelles la fibre constituant

Skechers EX1013-p. 119
Skechers v Nike

principalement une première surface de chaque bande est différente de la fibre constituant principalement la surface opposée de cette bande.

15. Procédé selon la revendication 14, selon lequel on utilise des fibres formant les surfaces opposées respectives des bandes qui ont des taux respectifs de retrait différents.

16. Procédé selon l'une quelconque des revendications précédentes, selon lequel on utilise plusieurs types de bandes étroites, chaque type étant d'une couleur différente, pour former une structure à chevauchement.

17. Procédé selon l'une quelconque des revendications précédentes, selon lequel un grand nombre de bandes étroites ayant des propriétés hydrophobe et oléorésistante sont utilisées pour former une structure à chevauchement.

Skechers EX1013-p. 120
Skechers v Nike

Fig. 1


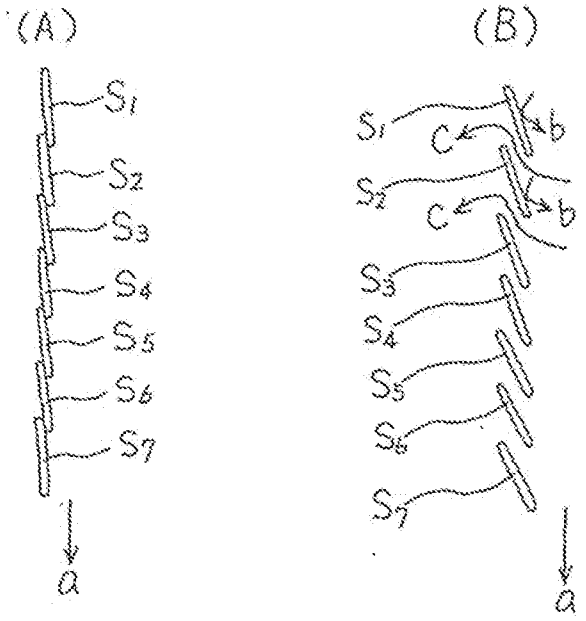


Fig. 2

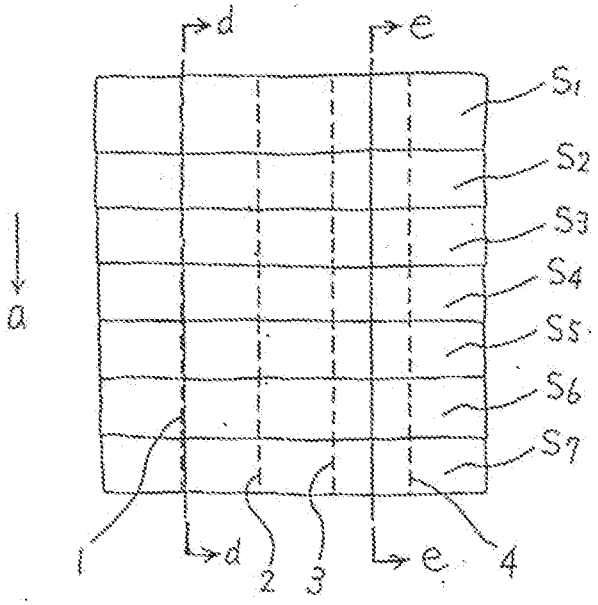

Skechers EX1013-p. 121
Skechers v Nike

Fig. 3



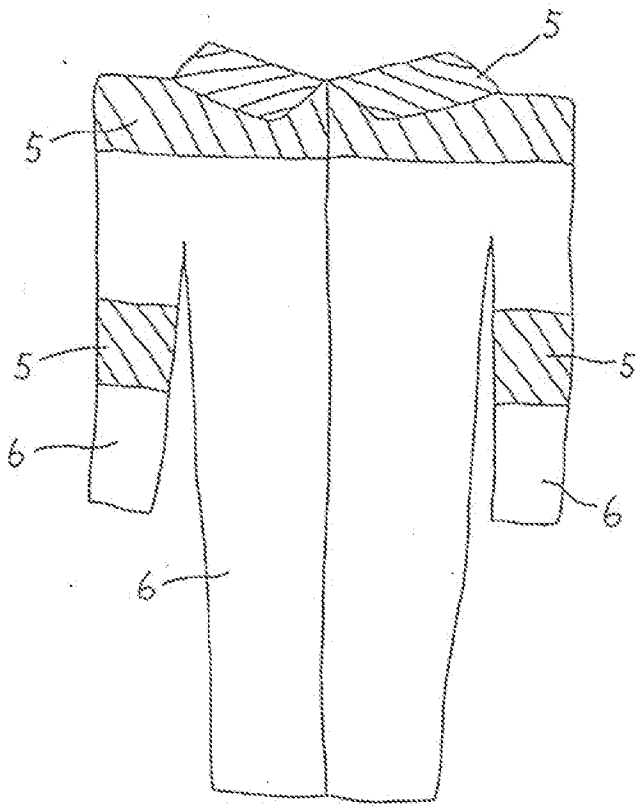


Fig. 4

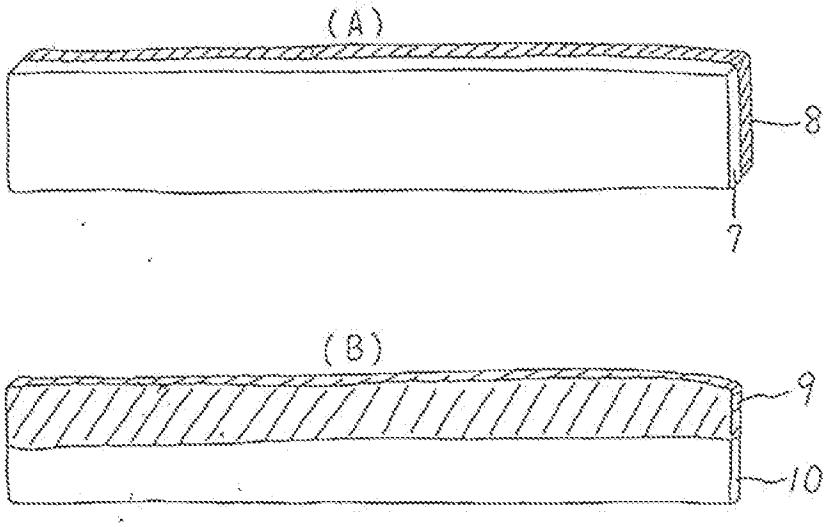


Skechers EX1013-p. 122
Skechers v Nike

Fig. 5

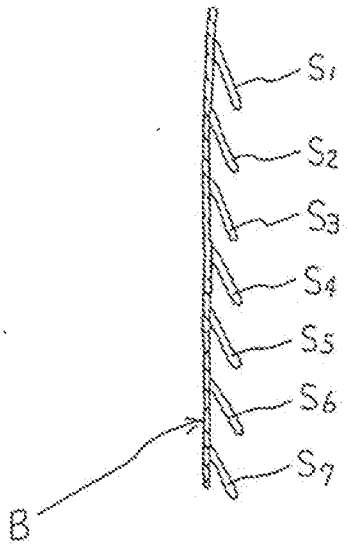

Skechers EX1013-p. 123
Skechers v Nike

Fig. 6

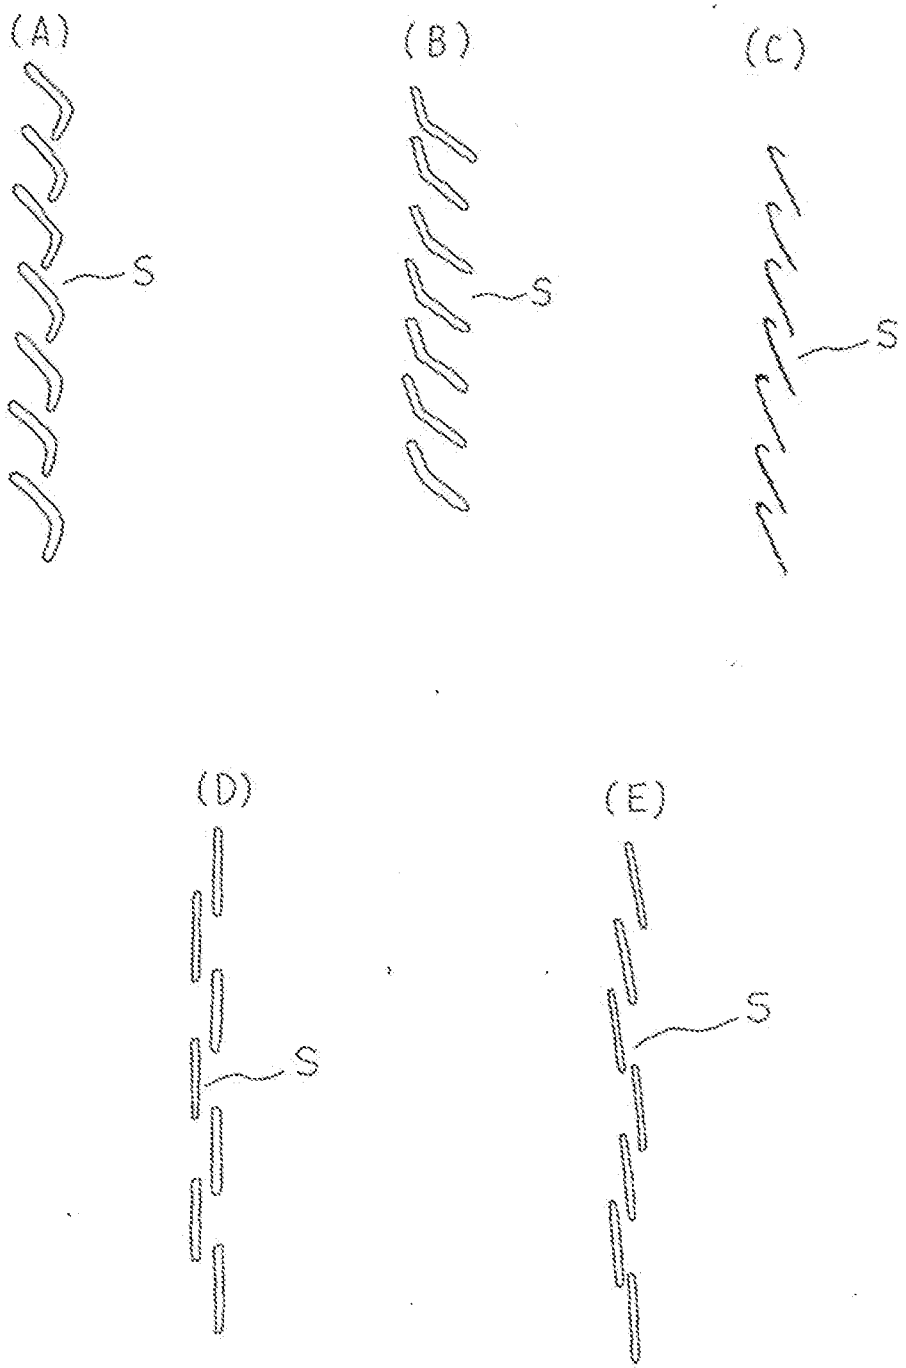

Skechers EX1013-p. 124
Skechers v Nike

Fig. 7


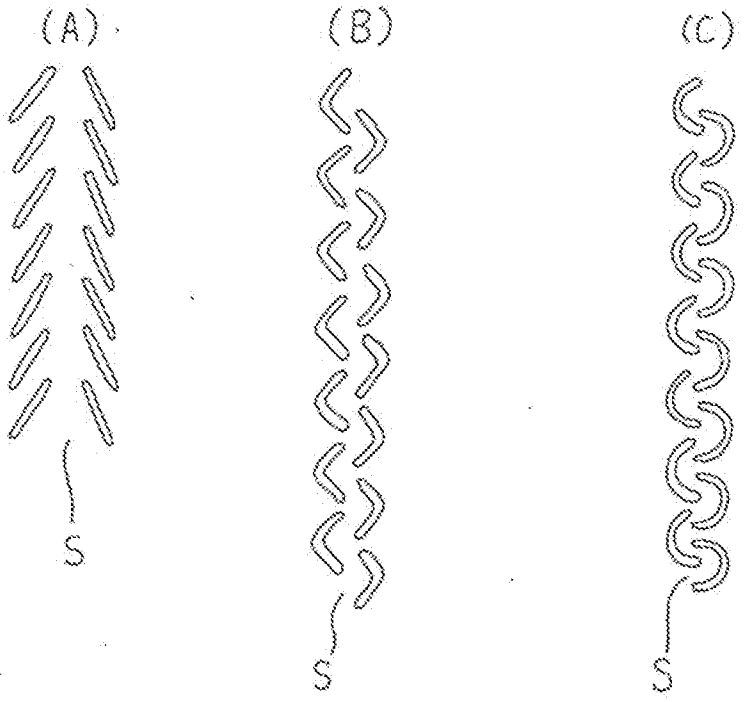


Fig. 8

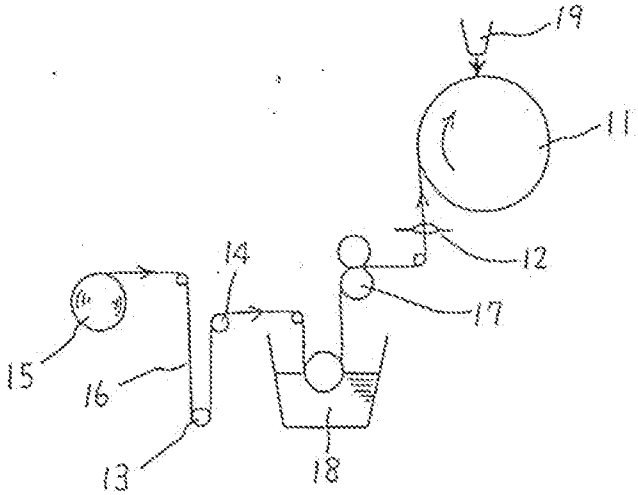

Skechers EX1013-p. 125
Skechers v Nike

Fig. 9


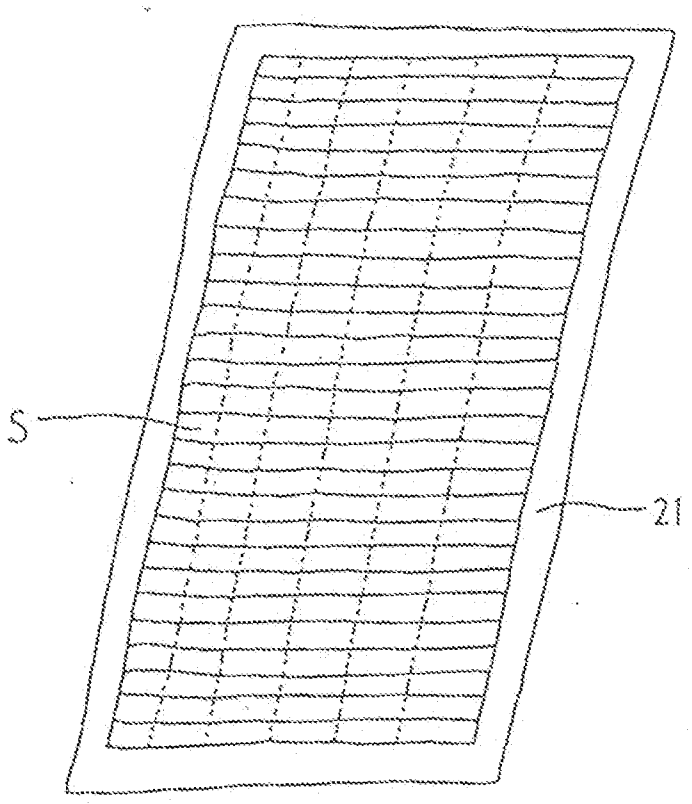


Fig. 10

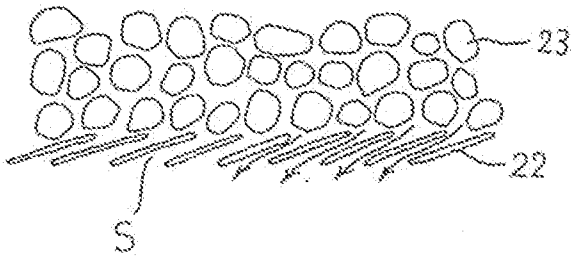

Skechers EX1013-p. 126
Skechers v Nike

Fig. 11

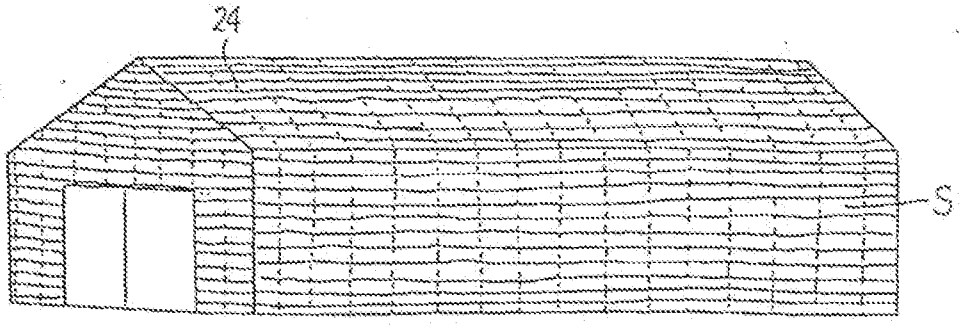


Fig. 12


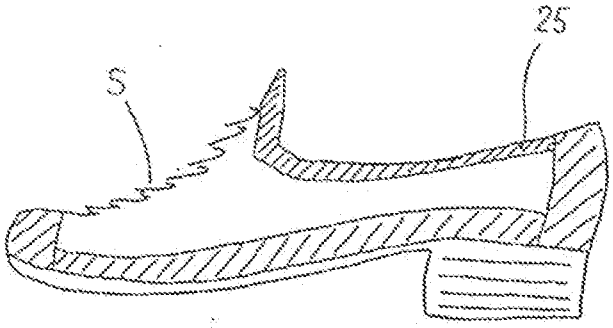


Fig. 13

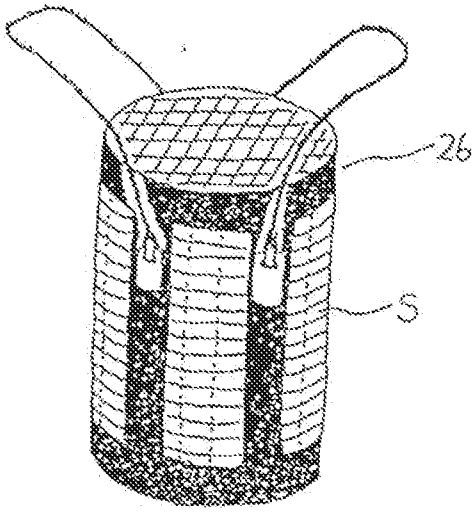

Skechers EX1013-p. 127
Skechers v Nike

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 233 091 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.08.2002 Bulletin 2002/34

(51) Int Cl.[7]: **D04B 1/14**

(21) Application number: **02251103.4**

(22) Date of filing: **19.02.2002**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **20.02.2001 GB 0104143**

(71) Applicant: **Sara Lee Corporation**
Winston-Salem, NC 27105 (US)

(72) Inventors:
- **Ractcliffe, Andrew**
  Slough, Berkshire SL1 4AU (GB)
- **Sharrocks, Philip**
  Slough, Berkshire SL1 4AU (GB)
- **Starbuck, Michael**
  Slough, Berkshire SL1 4AU (GB)
- **Cole, Claire**
  Slough, Berkshire SL1 4AU (GB)

(74) Representative: **Dealtry, Brian**
Eric Potter Clarkson,
Park View House,
58 The Ropewalk
Nottingham NG1 5DD (GB)

(54) Knitted fabric

(57) A knitted fabric comprising a plurality of knitted stitches which are interconnected to define a plurality of courses and wales, the knitted stitches being formed from a heat fusible yarn (14), with at least some of said stitches being formed from said heat fusible yarn plated with a ground yarn (12), the heat fusible yarn (14) being fused together at adjacent points of contact on stitches in order to give the fabric a desired dimensional stability and shape.

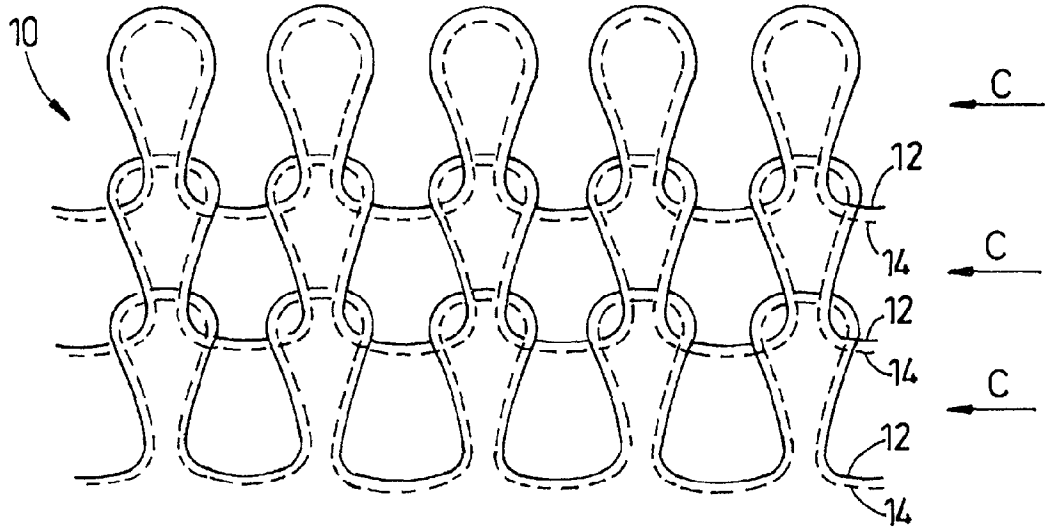


Fig. 1

EP 1 233 091 A1

Description

[0001] The present invention relates to a warp or weft knitted fabric, in particular but not exclusively, a knitted fabric suitable for making garments.

[0002] Fabrics for garments are commonly knitted using thermoplastics yarns such as polyamide or polyesters. The fabric may be knitted using either warp knitting or weft knitting techniques.

[0003] Once knitted, it is common for the fabric to be heat set in order to give the fabric stable dimensions and/or shape. Heat setting is achieved by stretching the fabric to the required dimension/shape and raising the temperature of the fabric to the setting temperature of the yarn whereat a permanent change is induced, viz. a new memory position is introduced into the yarn and it loses some of its stretch recovery capabilities and usually becomes relatively stiff. The fabric therefore thereafter retains the dimension/shape to which it was stretched during the heat setting process.

[0004] Accordingly, once the fabric has been heat set, it tends to lose its soft feel and handle qualities.

[0005] A general aim of the present invention is to provide a knitted fabric which is knitted using thermoplastics yarns as ground yarns and which is dimensionally stable without fully heat setting of the ground yarns.

[0006] According to one aspect of the present invention there is provided a knitted fabric comprising a plurality of knitted stitches which are interconnected to define a plurality of courses and wales, the knitted stitches being formed from a heat fusible yarn, with at least some of said stitches being formed from said heat fusible yarn plated with a ground yarn, the heat fusible yarn being fused together at points of contact on adjacent stitches in order to give the fabric a desired dimensional stability and shape.

[0007] According to another aspect of the invention there is provided a process for setting the coursewise and walewise dimensions and/or three dimensional shape of a fabric, the process including the steps of knitting a fabric so as to comprise a plurality of knitted stitches which are interconnected to define a plurality of courses and wales, the knitted stitches being formed from a heat fusible yarn with at least some of said stitches being formed from heat fusible yarn plated with a ground yarn having a setting temperature greater than the fusing temperature at which the heat fusible yarn become fusible, stretching the fabric on a former to stretch the fabric to desired coursewise and walewise dimensions and/or three dimensional shape, heating the fabric whilst on said former to at least the fusing temperature and preferably below said heat setting temperature, in order to cause the fusible yarn to fuse together at points of contact between the fusible yarn and subsequently cooling and removing the fabric from the former.

[0008] Preferably the heat fusible yarn is an elastomeric yarn.

[0009] Preferably the ground yarn is a thermoplastics yarn such as a polyamide or polyester. The heat fusible yarn is fusible at a temperature below the heat setting temperature of the thermoplastics yarn; the difference in these temperatures being dependent on the fibre type and the method of heating to effect fusing.

[0010] Various aspects of the present invention are hereinafter described, with reference to the accompanying drawings, in which:-

Figure 1 is a schematic stitch diagram of part of a weft knitted fabric according to a first embodiment of the present invention shown in a stretched condition prior to a setting operation;

Figure 2 is a schematic stitch diagram of the weft knitted fabric of Figure 1 after a setting operation;

Figure 3 is a schematic stitch diagram similar to Figure 2 showing a weft knitted fabric according to a second embodiment of the present invention.

[0011] A weft knitted fabric 10 according to a first embodiment of the present invention is illustrated in Figures 1 and 2. The fabric 10 includes a plurality of courses C each of which is knit using at least two yarn ends, viz. a ground yarn 12 and a heat fusible yarn 14 which serves the function of providing the fabric with desired dimensions and/or shape after a heat treatment.

[0012] The ground yarn 12 provides the body to the fabric and is preferably a thermoplastic yarn such as a polyamide or a polyester. The weight of the ground yarn is preferably in the range of 10-200 dtex, more preferably in the range of 60 to 80 dtex.

[0013] The heat fusible yarn is formed from a thermoplastics material which at a predetermined fusible temperature will fuse with itself at points of contact of the heat fusible yarn.

[0014] The weight of the fusible yarn is preferably in the range of 10 to 160 dtex, more preferably in the range of 20 to 50 dtex.

[0015] In this specification, the term 'fusible' is used to denote the condition where the yarn is able to bond to itself by the application of heat whilst retaining its integrity as a yarn; in other words the fusible temperature of the yarn is the temperature at or above which it becomes sufficiently tactile for it to bond or weld to itself but is below the temperature at which the yarn fully melts. For example, the 'sticking point' of elastomeric yarns would be in the region of 150 to 170 degrees C, i.e. this is the temperature at which the fusing would become active. This is the temperature based on 'dry' heat. The temperatures in the presence of steam would be considerably lower. The normal setting temperature of the ground yarns would be in excess of 180 degrees C in dry heat.

[0016] Thus, the predetermined fusible temperature is lower than the temperature at which the fusible yarn 14 melts and is also lower than the temperature at which the thermoplastic ground yarn 12 fully sets.

[0017] Accordingly, as schematically illustrated in Fig-

ure 2, if the fabric 10 is stretched, for example is placed upon a former, and is then raised to the predetermined fusible temperature, the points of contact between the fusible yarn become tactile and fuse together to define fused connections 18. Since the fusible temperature is below the temperature at which the fusible yarn 14 fully melts, the stitches 20 formed by the fusible yarn remain intact. The fused connections 18 thereby lock the stitches 20 formed by the fusible yarn 14, i.e. stitch lengths inbetween each adjacent pair of connections 18 are fixed throughout the fabric.

[0018] Since the fusible yarn 14 is knitted on adjacent courses and wales throughout the fabric, the relative position/sizes of stitch loops created by both the fusible and ground yarns immediately prior to creation of the fused connections 18 are maintained thereby giving the fabric a desired dimension/shape.

[0019] Accordingly, the fusible yarn 14 acts to 'set' the fabric at a desired dimension/shape without requiring the thermoplastic ground yarn 12 to be fully set. It will therefore be appreciated that the ground yarn 12 is more flexible and has more stretch recovery than a fully set thermoplastic ground yarn and that, as a result, the fabric of the present invention has improved feel and handle qualities.

[0020] Desirably the fusible and ground yarns are chosen such that at the predetermined fusible temperature of the fusible yarn 14, the ground yarn 12 is partially set, i.e. the ground yarn 12 is given a degree of shape retention or memory. This assists in giving stability to the shape/dimension of the fabric whilst still providing the benefits of improved feel/handle qualities when compared with a fully set ground yarn.

[0021] The relative weights of the ground and fusible yarns are chosen to ensure that the fusible yarns 14 contact one another at adjacent stitches (i.e. the ground yarns are not sufficiently large to shield the fusible yarns 14 from one another).

[0022] Preferably the fusible yarn 14 is an elastomeric yarn such as a bare Lycra (RTM) or Roice (RTM).

[0023] The use of an elastomeric yarn as the fusible yarn gives the advantage of providing the fabric with stretch qualities which enhance close shape fitting of a garment on the body of a wearer.

[0024] Alternatively, the fusible yarn 14 may be a non-elastomeric yarn such as a thermoplastic monofilament yarn produced from polyamide, polypropylene or other polymer with a lower setting, softening or melting temperature than the ground yarn.

[0025] In the alternative embodiment 30 illustrated in Figure 3, a fabric is illustrated having single courses C_S of heat fusible yarn 14 only alternating with courses C of fusible yarn 14 plaited with ground yarn 12. Instead of a single course C_S located inbetween courses of plated yarns 12 and 14 it will be appreciated that a desired number of adjacent courses C_S may be provided.

[0026] The combination of the number of adjacent courses formed from plated ground and fusible yarns and the number of adjacent courses formed from fusible yarns only may be varied as required in order to provide the fabric with desired characteristics. An important consideration is that each stitch contains the fusible yarn 12 such that connections 18 may be formed at each stitch.

[0027] In the examples given in Figures 1 and 3, the fabric is shown as being formed from plain jersey stitches only.

[0028] It will be appreciated that the fabric may also include other conventional stitches such as tuck or miss-stitches.

[0029] The fabric of the present invention is particularly suited to the creation of seamless garments wherein a tubular blank of fabric is moulded to a three dimensional shape on a former.

[0030] For example, a former in the shape of a human body part, for example the torso, is provided for the shaping of garments such as brassieres or briefs.

[0031] A tube of fabric as described above is located upon the former and elevated in temperature to the heat fusible temperature of the fusible yarn which is a high enough temperature to cause the heat fusible yarn to bond or weld together at its points of contact; the fusible temperature however being lower than the temperature at which the ground yarns are fully set. Preferably the fabric is heated using live steam.

[0032] Once the fabric has been exposed to a temperature whereat the heat fusible yarn has welded to itself, the fabric structure is locked in its stretched condition and slightly contracts (due to the stretch recovery of the heat fusible yarn). Accordingly the size of the former is chosen to be slightly oversize in order to cater for the slight contraction of the garment when removed from the former.

[0033] It is envisaged that heat meltable yarns may be incorporated into the fabric so as to join regions of fabric together. These heat meltable yarns are chosen so as to completely melt when the fabric is exposed to the fusible temperature and thereby cause the regions of fabric joined thereby to separate leaving a welded edge formed by the melted heat meltable yarn and which is of a desired shape and which is run resistant. This enables the garment to be shaped by pattern control techniques during knitting and avoids the need for a separate cutting-out process to shape the garment from the tubular blank.

[0034] It is envisaged that the former may be made from a resin polymer and be provided with a heat sink to prevent the surface of the former retaining a surface temperature equal to or above the welding temperature after repeated fabric moulding operations.

Claims

1. A knitted fabric comprising a plurality of knitted stitches which are interconnected to define a plurality of courses and wales, the knitted stitches being

Skechers EX1013-p. 130
Skechers v Nike

formed from a heat fusible yarn, with at least some of said stitches being formed from said heat fusible yarn plated with a ground yarn, the heat fusible yarn being fused together at adjacent points of contact on stitches in order to give the fabric a desired dimensional stability and shape.

2. A fabric according to claim 1 wherein said heat fusible yarn is a bare elastomeric yarn.

3. A fabric according to claims 1 or 2 wherein the ground yarn is a thermoplastics yarn capable of being fully set when elevated to a fully set temperature, said heat fusible yarn being fusible at a temperature below said fully set temperature.

4. A process for setting the coursewise and walewise dimensions and/or three dimensional shape of a fabric, the process including the steps of knitting a fabric so as to comprise a plurality of knitted stitches which are interconnected to define a plurality of course and wales, the knitted stitches being formed from a heat fusible yarn with at least some of said stitches being formed form heat fusible yarn plated with a ground yarn, stretching the fabric on a former to stretch the fabric to desired coursewise and walewise dimensions and/or three dimensional shape, heating the fabric whilst on said former to at least the fusing temperature in order to cause the fusible yarn to fuse together at points of contact between the fusible yarn and subsequently cooling and removing the fabric from the former.

5. A process according to claim 4 wherein said ground yarn is a thermoplastics yarn capable of being fully set when elevated to a fully set temperature, and wherein said heating of the fabric whilst on the former is preformed to elevate the fabric to a temperature greater than said fusing temperature but less than said fully set temperature.

6. A process according to claim 4 or 5 wherein the fabric is further knitted using heat meltable yarns in order to join regions of said fabric together, said heat meltable yarns being melted when raising the fabric to said heat fusible temperature so as to cause said regions of fabric to separate and define, where separated, a run resistant edge of a desired shape.

7. A garment formed at least in part from knitted fabric according to Claims 1, 2 or 3.

Skechers EX1013-p. 131
Skechers v Nike

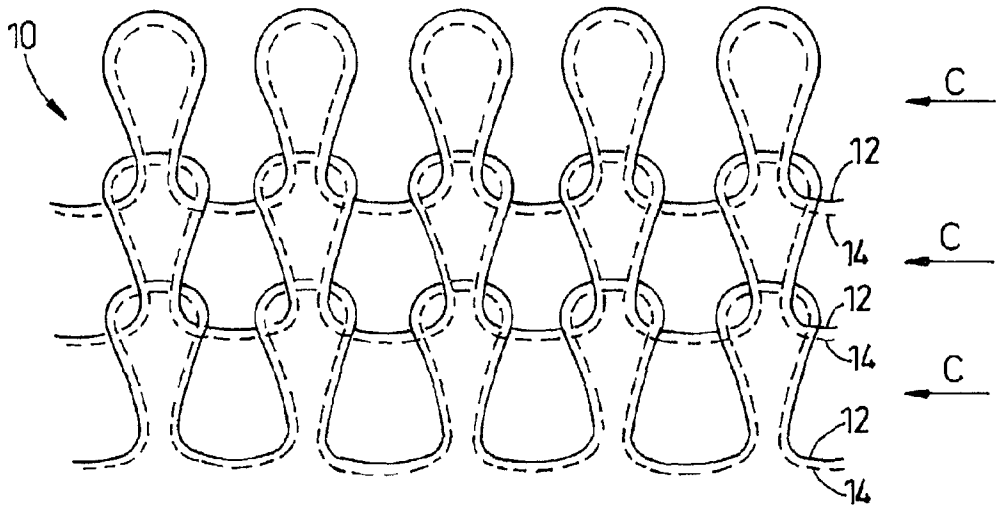


Fig. 1

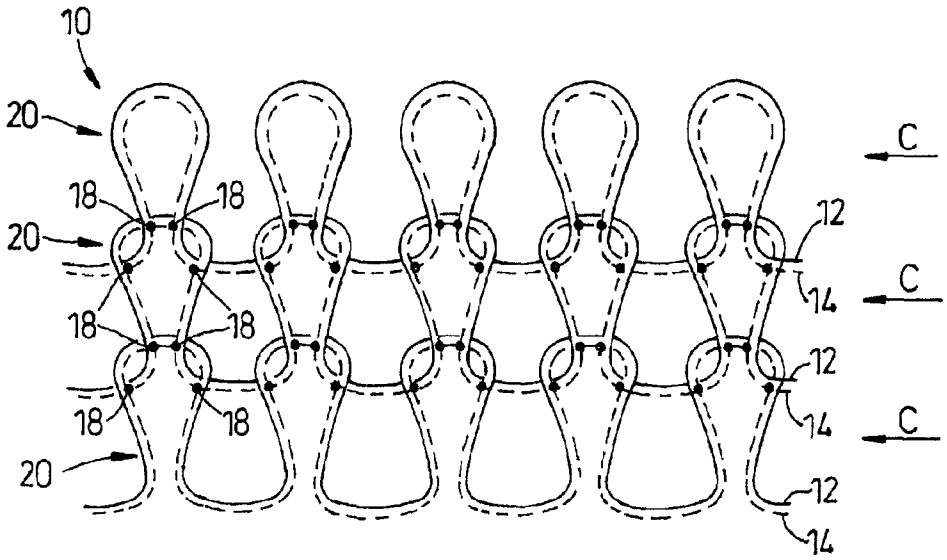


Fig. 2

Skechers EX1013-p. 132
Skechers v Nike

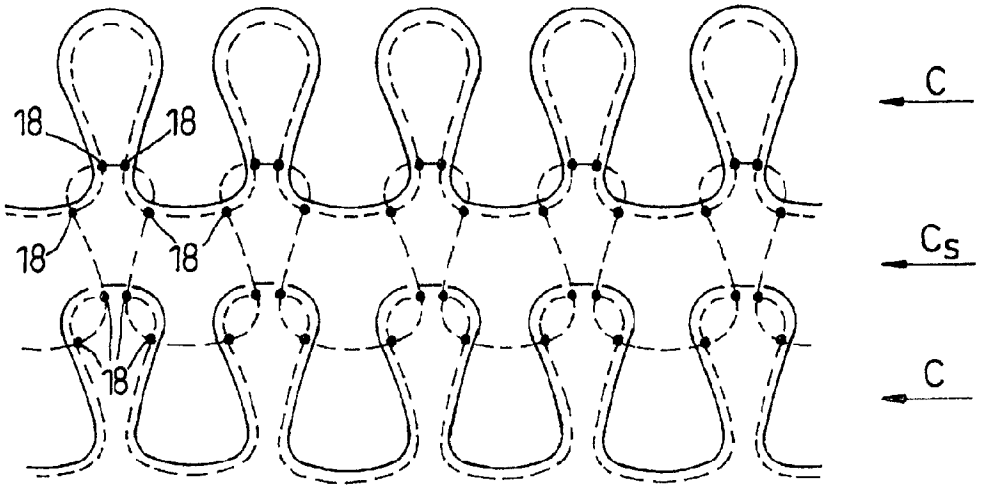


Fig. 3

Skechers EX1013-p. 133
Skechers v Nike

European Patent Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 1103

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 198 55 542 A (KEIPER RECARO GMBH CO) 8 June 2000 (2000-06-08) * column 1, line 66 - column 2, line 13; claims 1,3 *	1,4	D04B1/14
X	DE 295 04 780 U (HOECHST TREVIRA GMBH & CO KG) 20 July 1995 (1995-07-20) * page 17, line 9 - line 19; claims 1,5; example 2 *	1,3-5	
X	EP 0 833 000 A (KANEBO LTD) 1 April 1998 (1998-04-01) * claims 1,2,6; examples 6,7 *	1,3-5	
A	DE 38 05 234 A (SHIMA SEIKI MFG) 31 August 1989 (1989-08-31) * column 4, line 34 - column 5, line 13; claims 1-3; figures 1-4 *	1,4,6,7	
A	DE 197 38 433 A (RECYTEX TEXTILAUFBEREITUNG GMB) 2 April 1998 (1998-04-02)		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	DE 25 23 772 A (BAHNER GERHARD) 2 December 1976 (1976-12-02)		D04B
A	EP 0 758 693 A (BUCK ALFRED) 19 February 1997 (1997-02-19)		

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
THE HAGUE	23 May 2002	Van Gelder, P

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

Skechers EX1013-p. 134
Skechers v Nike

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 02 25 1103

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-05-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 19855542	A	08-06-2000	DE	19855542 A1	08-06-2000
			WO	0032861 A1	08-06-2000
DE 29504780	U	20-07-1995	DE	29504780 U1	20-07-1995
			BR	9601065 A	06-01-1998
			CA	2172236 A1	22-09-1996
			CZ	9600837 A3	16-10-1996
			EP	0733732 A2	25-09-1996
			HU	9600683 A1	29-12-1997
			JP	8269841 A	15-10-1996
			PL	313371 A1	30-09-1996
EP 0833000	A	01-04-1998	DE	69619672 D1	11-04-2002
			EP	0833000 A1	01-04-1998
			JP	3025310 B2	27-03-2000
			US	5962349 A	05-10-1999
			WO	9637648 A1	28-11-1996
DE 3805234	A	31-08-1989	DE	3805234 A1	31-08-1989
			CH	679354 A	14-02-1992
			FR	2627515 A1	25-08-1989
			GB	2214939 A ,B	13-09-1989
DE 19738433	A	02-04-1998	DE	29616943 U1	21-11-1996
			DE	19738433 A1	02-04-1998
DE 2523772	A	02-12-1976	DE	2523772 A1	02-12-1976
			NL	7604471 A	30-11-1976
EP 0758693	A	19-02-1997	EP	0758693 A1	19-02-1997
			AT	207554 T	15-11-2001
			DE	59509754 D1	29-11-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

Skechers EX1013-p. 135
Skechers v Nike

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 April 2002 (18.04.2002)

PCT

(10) International Publication Number
WO 02/31247 A1

(51) International Patent Classification[7]: D04H 1/00, 3/14, B32B 27/04, 27/12

(21) International Application Number: PCT/US01/31604

(22) International Filing Date: 10 October 2001 (10.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/238,971 10 October 2000 (10.10.2000) US

(71) Applicant *(for all designated States except US)*: **PRODESCO, INC.** [US/US]; 700 Park Avenue, P.O. Box 237, Perkasie, PA 18944 (US).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **GREENHALGH, E., Skott** [US/US]; 7943 Pleasant Avenue, Wyndmoor, PA 19038 (US).


(74) Agents: **BARRON, Alexis** et al.; Synnestvedt & Lechner LLP, 2600 Aramark Tower, 1101 Market Street, Philadelphia, PA 19107-2950 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: STIFFENED FABRIC

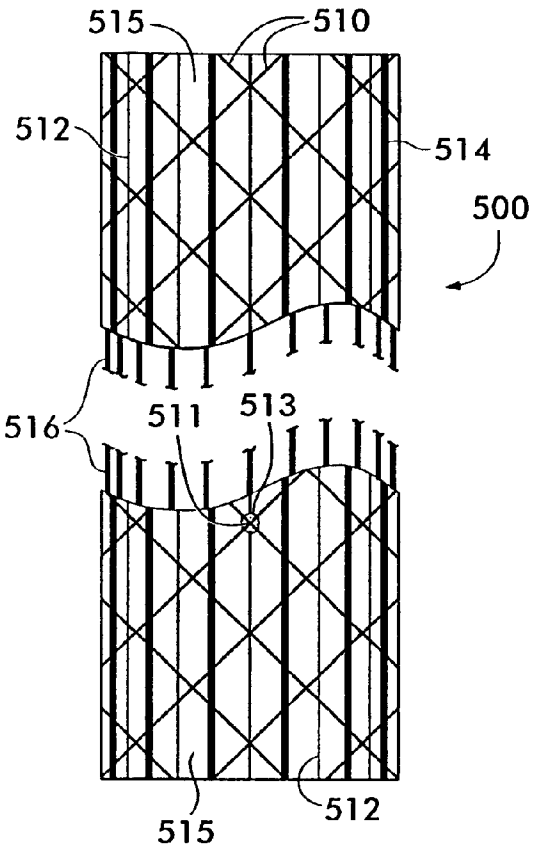

(57) Abstract: A stiffened fabric (500) of interlaced filamentary members (510 & 514) is disclosed, stiffening of the fabric being caused by joining the filamentary members together at mutual points of contact (511) within the fabric to prevent relative motion of the filamentary members. Joining of the members occurs by heat fusing, chemical fusing, or adhesive (513) bonding at selected points to control the stiffness of the fabric. Bio-absorbable materials are used to form some of the filamentary members so that the stiffness and porosity of the fabric changes over time as the bio-absorbable material is absorbed when the fabric is implanted in living tissue.

WO 02/31247 A1

patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:
— *with international search report*

STIFFENED FABRIC

Related Application

This application is based on and claims priority of U.S. Provisional Application No. 60/238,971, filed October 10, 2000.

Field of the Invention

This invention relates to fabrics preferably comprising a plurality of different materials, wherein filaments within the fabric are fused or otherwise joined together to control various physical properties of the fabric.

Background of the Invention

The physical characteristics of fabrics, such as stiffness (also known as "hand"), porosity, density, elasticity, resilience, tensile strength, resistance to abrasion, are largely controlled by the size and type of yarns or filaments which are interlaced together, the material from which the yarns or filaments are made and the manner in which they are interlaced, for example, by weaving, knitting or braiding.

There is generally a limit on the degree of stiffness which can be attained in a fabric. This is due, in part, to the inherent flexibility of the long, slender filamentary members comprising the fabric and the fact that they are generally free to move relatively to one another to some degree within the fabric.

It is sometimes desirable to have a fabric formed of relatively thin filamentary members of a relatively flexible

material but having a stiffness which is relatively greater than would normally be achieved when the filamentary members are interlaced. Such fabrics are expected to find use as human implants to reinforce soft tissue for the treatment of conditions, such as sleep apnea and snoring. It would also be beneficial if the stiffness of the fabric could be designed to change over time to become less stiff in relation to the formation of scar tissue resulting from the implant, which tends to stiffen the tissue. If the fabric can be made to become less stiff over time, the total stiffness of the affected area will remain relatively constant over time for optimum treatment of the disorder.

It may also be desired to maintain or augment a particular porosity or interstice size in the fabric which is otherwise incompatible with the desired stiffness of the fabric. If relatively large interstices are desired in the fabric, for example, to allow flow of fluid therethrough or promote ingrowth of tissue into the fabric, this is achieved by interlacing relatively small diameter filamentary members in a relatively open mesh. This will yield a fabric of relatively low stiffness, especially if polymers such as polyester, nylon or polypropylene are used which are themselves relatively soft, pliant filaments.

If the stiffness of fabrics could be controlled and relatively high stiffness could be achieved in conjunction with other fabric properties which are presently considered incompatible or inconsistent with the higher stiffness, then woven, knitted and braided fabrics may find a wider spectrum of applications, especially, but not only, in the treatment of human diseases and disorders.

Summary of the Invention

The invention concerns a stiffened fabric comprising a plurality of filamentary members interlaced together, for example, by weaving, knitting or braiding. The filamentary members engage one another at mutual points of contact where, at selected ones of the mutual points of contact, they are substantially rigidly joined together to substantially inhibit

relative motion between the filamentary members and thereby impart a predetermined stiffness to the fabric. The selected ones of the mutual points of contact joined together may comprise a portion of the total number of the mutual points of contact or substantially all of the mutual points of contact between the filamentary members as required to obtain a desired stiffness. The filamentary members are free to move relatively to one another between the selected ones of the mutual points of contact at which they are attached, thus providing for a degree of flexibility in the fabric.

In one embodiment, the plurality of filamentary members comprises a first group of filamentary members having a relatively low melting point interlaced with a second group of filamentary members having a relatively high melting point. The filamentary members of the first group are joined to filamentary members of the second group by heating the fabric to a temperature higher than the melting point of the first group of filamentary members and lower than the melting point of the second group of filamentary members thereby causing filamentary members of the first group to fuse with filamentary members of the second group at the mutual points of contact between the filamentary members of the first and the second groups. In another embodiment of the stiffened fabric according to the invention, an adhesive, positioned at the selected ones of the mutual points of contact, is used to join the filamentary members together, thereby stiffening the fabric.

The invention also contemplates a stiffened fabric wherein the plurality of filamentary members includes a first group of filamentary members comprising a material which is absorbable when implanted in living tissue. Filamentary members comprising such bio-absorbable material are interlaced with a second group of filamentary members, preferably comprising non bio-absorbable material. The bio-absorbable filamentary members of the first group are initially joined to filamentary members of the second group at the mutual points of contact to provide a relatively high stiffness to the fabric. The filamentary members of the first group are absorbed upon implantation of the fabric in

living tissue and, over time, provide a relatively lower stiffness to the fabric as the filamentary members of the first group are absorbed. The purpose of this embodiment is to construct an implant formed by braiding the filamentary members into an elongated rod which is implanted in soft tissue to provide stiffness. Over time, as the bio-absorbable filaments are absorbed the rod becomes less stiff, thereby compensating for the increased stiffness of the surrounding tissue due to the formation of scar tissue to keep the overall stiffness of the tissue near the implant a constant.

In another embodiment of the stiffened fabric according to the invention, the filamentary members are interlaced by weaving to provide a plurality of interstices in the fabric having a predetermined size and resulting in the fabric having a first predetermined porosity. The fabric further comprises a plurality of absorbable filamentary members again formed of a material which is absorbable when implanted in living tissue. The absorbable filamentary members are interwoven in the fabric in overlying relation with the interstices thereby reducing the size of the interstices and resulting in the fabric having a second predetermined porosity smaller than the first predetermined porosity. The absorbable filamentary members are absorbed when the fabric is implanted in living tissue causing the porosity of the fabric to change from the second predetermined porosity to the first (larger) predetermined porosity.

It is an object of the invention to provide a fabric wherein the stiffness or "hand" may be controlled.

It is another object of the invention to provide a fabric wherein the stiffness may be varied.

It is another object of the invention to provide a fabric wherein the porosity of the fabric may be varied.

These and other objects and advantages of the invention may be discerned upon consideration of the following drawings and detailed description of the preferred embodiments.

Brief Description of the Drawings

Figure 1 shows a side view of a braided fabric rod according to the invention;

Figure 2 shows a perspective view of a knitted fabric tube according to the invention;

Figure 3 shows a perspective view of a woven fabric sleeve according to the invention; and

Figure 4 shows a perspective view of a wound rod according to the invention.

Detailed Description of the Preferred Embodiments

The invention comprises a fabric of interlaced filamentary members wherein the members, once interlaced, are joined together at points of contact with one another to prevent relative motion between them and thereby stiffen the fabric. The filamentary members are not otherwise constrained between the points of contact at which they are joined and may, thus, move relatively to one another between the joined contact points to provide some flexibility to the fabric. Joining together of the filamentary members is preferably accomplished by including throughout the fabric filamentary members having a relatively low melting point with filamentary members having a relatively higher melting point and subjecting the fabric to a temperature somewhere between the melting points of the two members. The lower melting point members fuse with the higher melting point members, locking all of the members in place and substantially increasing the stiffness of the fabric while maintaining other fabric characteristics such as porosity, interstice size, which would otherwise only be associated with a fabric having relatively less stiffness.

A stiffened fabric according to the invention may find use as a human implant in the area of the soft palate and air passageways of the body to stiffen the palate and passageways in

the treatment of excessive snoring and obstructive sleep apnea (OSA). OSA, while not life threatening, is nevertheless a serious disorder which interrupts sleep and is recognized as a leading cause of excessive daytime sleepiness which increases the risk factors in automobile and industrial accidents.

OSA results from an occlusion of the upper airway at the level of the oropharynx. The occlusion occurs because the tissue defining the airway is insufficiently stiff and collapses when the airway is subjected to sub-atmospheric pressure during inspiration. The resulting apnea leads to progressive asphyxia until there is a brief arousal from sleep and the airway dilator and abductor muscles reopen the airway and airflow to the lungs resumes. The person then returns to sleep. The sequence repeats itself throughout sleep as many as 400 to 500 times per night. The compliant tissue is also naturally prone to vibrate at relatively low frequencies resulting in snoring. Currently, severe OSA is treated by a tracheotomy which bypasses the occluded passageways.

By way of example, a stiffened fabric rod 500, shown in Figure 1, having a of length 30mm, a diameter of 3mm, an elastic modulus of 80,000 psi and a porosity of 60% was made according to the invention to serve as an implant to stiffen the soft palate.

To achieve the above specified properties, 24 polyester yarns 510 of 150 denier were braided at a +/-45° braid angle with 12 axially oriented yarns 512 of 100 denier, also of polyester. A further 12 axial filamentary members 514 were also braided into rod 500, members 514 comprising monofilament polypropylene of 6 mil diameter. A further 22 polypropylene monofilaments 516 were braided axially into the rod to form a core.

The rod was then heated to a temperature of 163°C, the melting point of the polypropylene (the melting point of the polyester was 250°C) to fuse the polypropylene and polyester together and form a stiffened rod of braided fabric. The ratio of polyester and polypropylene was chosen to achieve the required elastic modulus of 80,000 psi. The axially oriented core

monofilaments 516 help stabilize the rod when subjected to bending forces and prevent the rod from kinking when bent. When implanted in the soft palate, the rod stiffens the palate and increases its natural frequency to reduce snoring and any effects of sleep apnea caused by the compliance of the upper palate.

Rather than using heat to fuse the filamentary members to form the stiffened fabric rod 500, adhesive bonding of the filamentary members may be employed. Selected points of contact such as 511 between filamentary members 510 are bonded together with an adhesive 513. Adhesive 513 is preferably substantially inelastic and effectively prevents relative sliding motion as well as relative rotation of the filamentary members 510 to provide increased stiffness to the stiffened fabric rod 500. The stiffness of the rod is proportional to the number of mutual points of contact which are adhered to one another. The adhesive may be a permanent adhesive, activated by heat, chemicals or water, as well as a solvent which chemically fuses the filamentary members together at the cross-over points. The adhesive may also be water soluble, yielding a rod with one stiffness when dry, and a second, lower stiffness when wetted to dissolve the adhesive bonds thereby allowing the filamentary members to move relatively to one another.

An aspect of the invention is the creation of a structure whose stiffness and/or porosity changes over time. For example, filamentary members 514 may be bio-absorbable filaments made from materials such as polylactic acid or polyglycolic acid instead of polypropylene. The bio-absorbable filaments are interbraided with the polyester yarns 510 forming the stiffened rod and joined with them at the mutual points of contact. Once implanted, the bio-absorbable filaments 514 degrade over time and are absorbed into and eliminated from the tissue, leaving only the polyester yarns and/or polypropylene filaments in the implant. Stiffness of the rod is reduced over time as a result of the elimination of some of the filaments which would normally contribute some stiffness to the rod. This is useful, for example, to maintain the stiffness of the tissue constant as scar tissue, which is stiffer than regular tissue, forms as the tissue heals after the

operation. The degrading components compensate for the development of the stiffer scar tissue by reducing the stiffness provided by the rod.

Porosity of the fabric may also be increased by interlacing the bio-absorbable filaments to coincide with interstices 515 formed by the non-biodegradable filamentary members 510 of the stiffened fabric rod as shown in Figure 1. As the bio-absorbable filaments degrade, they no longer block the interstices 515 between the other filamentary members 510, resulting in increased porosity over time. This is of interest to promote the ingrowth of living cells into the implant to secure it in position and prevent migration.

The composite stiffened fabric according to the invention is not limited to the above described application, and several examples of additional applications are provided below.

In the construction of a Bowden cable, used for the remote mechanical actuation of a device, a flexible yet relatively stiff outer sleeve houses a coaxial wire core which is movable longitudinally through the sleeve to place a tension or compression force on a mechanism connected to one end of the wire core, such as the trunk release of an automobile, to actuate it and allow the trunk to be opened remotely, for example, from within the passenger compartment. Such a Bowden cable 518, a portion of which is shown in Figure 2, may have an outer sleeve formed from a warp knitted tube 520 comprising polyester yarns 522 having a relatively low melting point and PTFE yarns or filaments 524, which has a relatively higher melting point. Tube 520 is knitted by techniques well known in the art so that the polyester yarns comprise the outer surface 526 of the tube, and the PTFE filaments comprise the inner surface 528 of the tube. When the tube is heated, the polyester yarns fuse to each other and the PTFE filaments provide the required stiffness to the tube. The PTFE provides for a non-stick inner surface 528 allowing the wire core 530 to slide within the tube substantially without friction, thus, providing an excellent bearing surface on the inside of the tube.

By way of a further example, in the construction of a flexible sheath 532 (see Figure 3) for covering electrical wiring harnesses to protect the wires 534 against abrasion, a woven tube 536 may be manufactured from a combination of two different filamentary materials 538 and 540 having different melting points, such as polypropylene and polyester respectively. If the two materials are interwoven to form a substantially homogeneous fabric, then when the heat is applied to fuse the lower melting point material (the polypropylene 538) a continuously stiffened tube will be formed. However, if the polypropylene 538 is interwoven with the polyester 540 at selected points intermittently along the length of the tube, for example, at regular intervals, this will form an intermittently stiffened tube having stiffened segments 542 alternating with unstiffened segments 544. The length of tube having the alternating section will be more flexible than the continuously stiffened tube and will bend more easily to follow a curved path.

In another example, shown in Figure 4, a filament wound rod 546 may be formed by the stiffened composite fabric according to the invention. Starting with a core 548 of polyester filaments, polypropylene filaments 550 may be wrapped, either alone or in combination with other filaments or yarns 552, around the polyester core 548. Upon fusing of the lower melting polypropylene filaments 550, a stiffened rod is produced. If bio-absorbable filaments such as polyglycolic or polylactic are used for filaments 552, then the rod will be capable of changing stiffness as the bio-absorbable filaments are absorbed over time. The filament-wound embodiment may also be used to stiffen living tissue similar to the braided embodiment.

The composite stiffened fabric according to the invention may also be used to create flat fabric and stiffen the flat fabric into a desired three dimensional shape. Materials having different melting points, such as polyester and polypropylene, are woven, knitted or braided together. The fabric may be shaped in a mold or on a mandrel having the desired shape, and when heated to the melting temperature of the lower melting point

material and then cooled, the fabric will be fixed into the desired shape by the fusing of the yarns or filaments together.

In all the examples provided above, the relative stiffness of the end product may be tailored to a desired value by the choice of materials and the ratio of lower melting to higher melting temperature materials used, with greater stiffness being achieved if more lower melting temperature material is used. In addition to joining the various yarns and/or filaments together by heat fusing, adhesives may also be used. Selected ones or all of the filamentary members comprising the fabric may be coated with adhesive which causes the filamentary members to bond together at points of contact.

CLAIMS

What is claimed is:

1. A stiffened fabric, comprising a plurality of filamentary members interlaced together and engaging one another at mutual points of contact, said filamentary members being substantially rigidly joined together at selected ones of said mutual points of contact to substantially inhibit relative motion between said filamentary members and thereby impart a predetermined stiffness to said fabric, said filamentary members being free to move relatively to one another between said selected ones of said mutual points of contact.

2. A stiffened fabric according to Claim 1, wherein said selected ones of said mutual points of contact comprise substantially all of said mutual points of contact between said filamentary members.

3. A stiffened fabric according to Claim 1, wherein said plurality of filamentary members comprise a first group of filamentary members having a relatively low melting point interlaced with a second group of filamentary members having a relatively high melting point, said filamentary members of said first group being joined to filamentary members of said second group by heating said fabric to a temperature higher than said melting point of said first group of filamentary members and lower than said melting point of said second group of filamentary members thereby causing filamentary members of said first group to fuse with filamentary members of said second group at said mutual points of contact between said filamentary members of said first and said second groups.

4. A stiffened fabric according to Claim 3, wherein said filamentary members of said first group comprise polypropylene and said filamentary members of said second group comprise polyester, said polypropylene having a relatively lower melting point than said polyester.

5. A stiffened fabric according to Claim 3, wherein said filamentary members are interlaced by braiding into an elongated rod.

6. A stiffened fabric according to Claim 5, wherein said elongated rod comprises:

filamentary members of said second group braided together at a predetermined braid angle; and

filamentary members of said first group braided with said first group axially with respect to said rod.

7. A stiffened fabric according to Claim 3, wherein said fabric has a relatively greater number of filamentary members of said first group than the number of filamentary members of said second group.

8. A stiffened fabric according to Claim 1, further comprising an adhesive positioned at said selected ones of said mutual points of contact to join said filamentary members together, thereby stiffening said fabric.

9. A stiffened fabric according to Claim 8, wherein said adhesive comprises a water activated adhesive which joins said filamentary members together when in contact with water, thereby increasing the stiffness of said fabric.

10. A stiffened fabric according to Claim 8, wherein said adhesive comprises a water soluble adhesive which releases said filamentary members from one another when in contact with water, thereby reducing the stiffness of said fabric.

11. A stiffened fabric according to Claim 1, wherein said plurality of filamentary members includes a first group of filamentary members comprising a material which is absorbable when implanted in living tissue, filamentary members comprising said first group being interlaced with a second group of filamentary members, said filamentary members of said first group being initially joined to filamentary members of said second group at said mutual points of contact to provide a relatively

high stiffness to said fabric, said filamentary members of said first group being absorbed upon implantation of said fabric in living tissue and thereby providing a relatively lower stiffness to said fabric as said filamentary members of said first group are absorbed.

12. A stiffened fabric according to Claim 11, wherein said filamentary members are interlaced by braiding to form said fabric into an elongated rod shape.

13. A stiffened fabric according to Claim 11, wherein said filamentary members are interlaced to form a tube.

14. A stiffened fabric according to Claim 13, wherein said filamentary members are interlaced by braiding.

15. A stiffened fabric according to Claim 11, wherein said absorbable material comprises polylactic acid.

16. A stiffened fabric according to Claim 11, wherein said absorbable material comprises polyglycolic acid.

17. A stiffened fabric according to Claim 1, wherein said filamentary members are interlaced by weaving to provide a plurality of interstices in said fabric having a predetermined size and resulting in said fabric having a first predetermined porosity, said fabric further comprising a plurality of absorbable filamentary members comprising a material which is absorbable when implanted in living tissue, said absorbable filamentary members being interwoven in said fabric in overlying relation with said interstices thereby reducing the size of said interstices and resulting in said fabric having a second predetermined porosity smaller than said first predetermined porosity, said absorbable filamentary members being absorbed when said fabric is implanted in living tissue causing said porosity of said fabric to change from said second predetermined porosity to said first predetermined porosity.

18. A stiffened fabric according to Claim 17 wherein said absorbable filamentary members comprise polylactic acid.

19. A stiffened fabric according to Claim 17 wherein said absorbable filamentary members comprise polyglycolic acid.

20. A stiffened fabric according to Claim 1, further comprising an elongated core around which said filamentary members are interlaced to form a stiffened sheath surrounding said core.

21. A stiffened fabric according to Claim 20, wherein said filamentary members are interlaced by wrapping around said core.

22. A stiffened fabric according to Claim 21, wherein a portion of said filamentary members comprise a material which is absorbable in living tissue.

23. A stiffened fabric, comprising:

a plurality of filamentary members interlaced together and engaging one another at mutual points of contact; and

means for substantially rigidly attaching said filamentary members to one another at selected ones of said mutual points of contact, said attaching means being inelastic and substantially preventing relative motion between said filamentary members at said selected ones of said mutual points of contact and thereby imparting a predetermined stiffness to said fabric, said filamentary members being free to move relatively to one another between said selected ones of said mutual points of contact.

24. A stiffened fabric according to Claim 23, wherein said attaching means comprises fusing said filaments together at said selected ones of said mutual points of contact.

25. A stiffened fabric according to Claim 23, wherein said attaching means comprises adhesively bonding said filaments together at said selected ones of said mutual points of contact.

26. A method of making a fabric having a predetermined stiffness, said method comprising the steps of:

interlacing a plurality of filamentary members together, said filamentary members engaging one another at mutual points of contact;

rigidly joining together said filamentary members at selected ones of said mutual points of contact to substantially prevent relative motion at said selected ones of said mutual points of contact; and

allowing said filamentary members to move relatively to one another between said selected ones of said mutual points of contact.

27. A method of making a fabric implantable in human tissue and having a stiffness which changes over time, said method comprising the steps of:

interlacing a plurality of filamentary members together, said filamentary members engaging one another at mutual points of contact, at least some of said filamentary members comprising a material which is absorbable in living tissue;

rigidly joining together said filamentary members at selected ones of said mutual points of contact to substantially prevent relative motion at said selected ones of said mutual points of contact; and

allowing said filamentary members to move relatively to one another between said selected ones of said mutual points of contact, when said fabric is implanted in living tissue, said filamentary members comprising said absorbable material being absorbed, thereby reducing the stiffness of said fabric.

28. A method of making a fabric implantable in human tissue and having a porosity which changes over time, said method comprising the steps of:

interlacing a plurality of first filamentary members together thereby creating interstices between said filamentary members, said filamentary members engaging one another at mutual points of contact;

interlacing a plurality of second filamentary members comprising a material which is absorbable in living tissue with

said first plurality of filamentary members, said second filamentary members being positioned to substantially coincide with said interstices;

rigidly joining together at least said first filamentary members at selected ones of said mutual points of contact to substantially prevent relative motion at said selected ones of said mutual points of contact; and

allowing said filamentary members to move relatively to one another between said selected ones of said mutual points of contact, when said fabric is implanted in living tissue, said second filamentary members comprising said absorbable material being absorbed thereby increasing the porosity of said fabric.

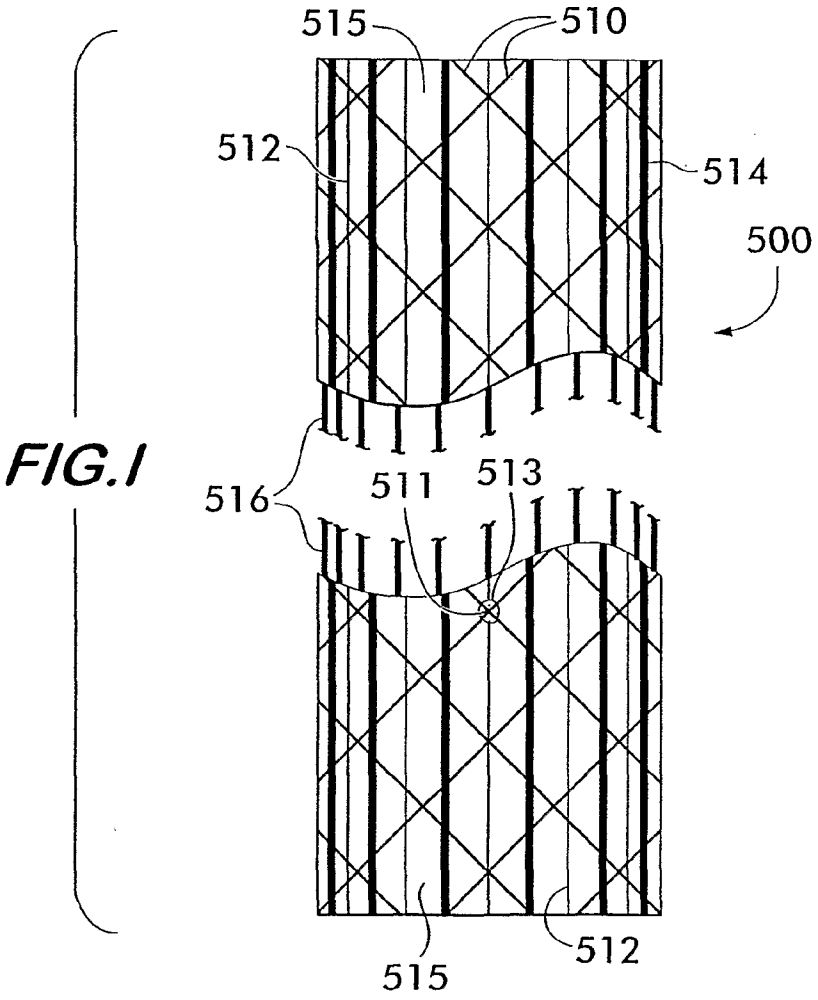


FIG.1

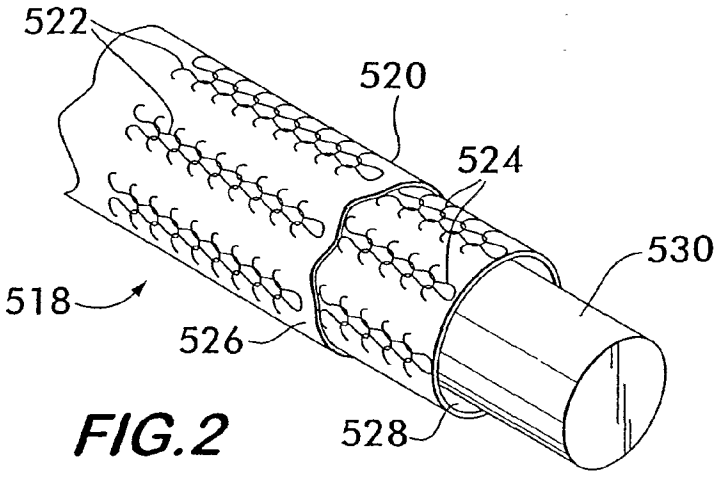


FIG.2

Skechers EX1013-p. 154
Skechers v Nike

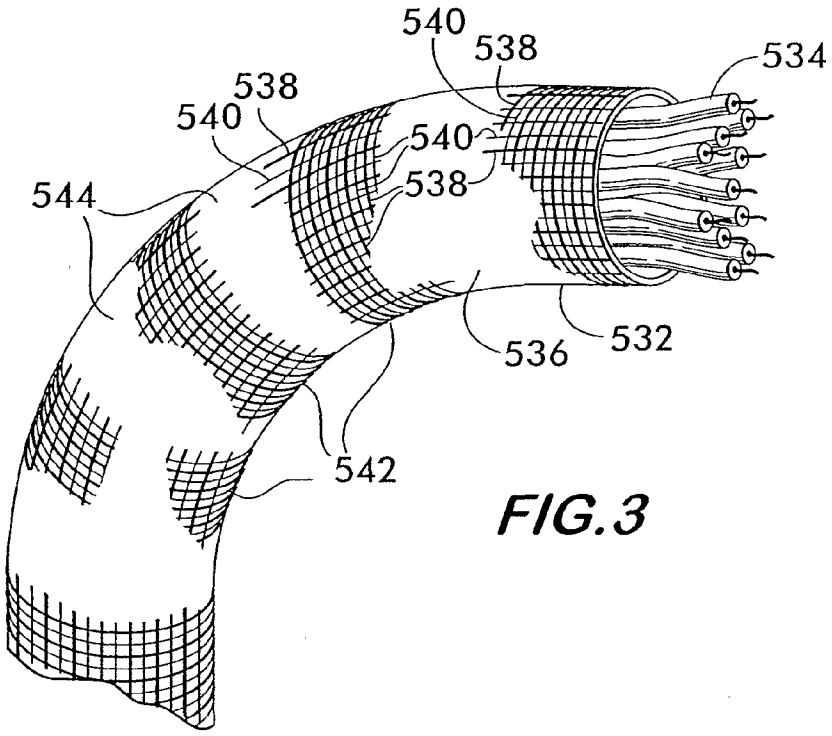


FIG.3

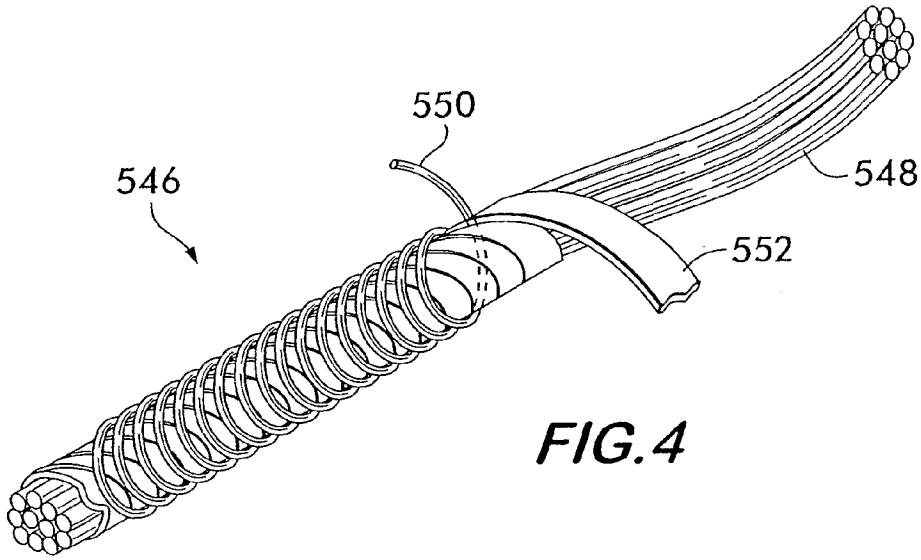


FIG.4

Skechers EX1013-p. 155
Skechers v Nike

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/31604

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :D04H 1/00, 3/14; B32B 27/04, 27/12

US CL :442/103,361,364,409,411,415; 604/265,288; 623/1.38,1.39,1.40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 442/103,361,364,409,411,415; 604/265,288; 623/1.38,1.39,1.40

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,015,429 A (LAU et al) 18 January 2000, see entire document.	1-28
X,P	US 6,162,537 A (MARTIN et al) 19 December 2000, see entire document.	1-28

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E"	earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search 17 NOVEMBER 2001	Date of mailing of the international search report 04 JAN 2002
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer ULA C. RUDDOCK Telephone No. (703) 308-0661

Form PCT/ISA/210 (second sheet) (July 1998)★

B. FIELDS SEARCHED
Electronic data bases consulted (Name of data base and where practicable terms used):

WEST
search terms: fiber, polyester, polypropylene, polylactic acid, polyglycolic acid, stiffened, fabric, textile, cloth, sheat, core, braiding, braided

(19)日本国特許庁（ＪＰ）　(12) **公開特許公報（Ａ）**　(11)特許出願公開番号

特開平11－302943

(43)公開日　平成11年(1999)11月２日

(51)Int.Cl.[6]	識別記号	ＦＩ	
Ｄ０３Ｄ　15/00		Ｄ０３Ｄ　15/00	Ｃ
Ａ４２Ｂ　1/00		Ａ４２Ｂ　1/00	Ｋ
Ｄ０４Ｂ　1/16		Ｄ０４Ｂ　1/16	
Ｄ０４Ｃ　1/02		Ｄ０４Ｃ　1/02	

審査請求　未請求　請求項の数７　ＯＬ　（全　５　頁）

(21)出願番号　特願平10－109367

(22)出願日　平成10年(1998)４月20日

(71)出願人　598052481
植田　政彦
大阪府大阪市平野区平野上町１丁目10番14号

(71)出願人　598052447
福山　満
大阪府羽曳野市碓井４丁目22番２号

(71)出願人　598052492
阿部　澄夫
兵庫県神戸市須磨区横尾２丁目26番地の４

(74)代理人　弁理士　鎌田　文二　（外２名）

最終頁に続く

(54)【発明の名称】　アパレル用生地及びブレード、それを用いた形態安定化繊維製品の製造方法

(57)【要約】
【課題】　アパレル用生地やブレードを素材として作られる繊維製品の形態安定性を簡単かつ安価な方法で高めることである。
【解決手段】　繊維製品の素材となるアパレル用生地やブレードの構成糸の中に熱可塑性樹脂の低融点糸を含ませ、素材を縫合するなどしてできる製品を低融点糸の融点を越える温度で熱成形して仕上げるようにしたのである。

【特許請求の範囲】
【請求項１】　よこ糸又は１本置きのたて糸と１本置きのよこ糸に低融点糸を用い、この低融点糸と他の糸を織成して成るアパレル用生地。
【請求項２】　ニットの地編組織の中に低融点糸を編込んで成るアパレル用生地。
【請求項３】　構成繊維の中に低融点糸を含ませた原糸を平打ちに組んで成るブレード。
【請求項４】　原糸の中に低融点糸を含ませ、その低融点糸の原糸と非低融点糸の原糸を平打ちに組んで成るブレード。
【請求項５】　請求項１又は２記載のアパレル用生地を裁断、縫合し、しかる後、低融点糸の融点を越える温度で熱成形することから成る形態安定化繊維製品の製造方法。
【請求項６】　請求項２記載のアパレル用生地を所要形状に成型編みし、しかる後、低融点糸の融点を越える温度で熱成形することから成る形態安定化繊維製品の製造方法。
【請求項７】　請求項３又は４記載のブレードを縫合又は織成してブレード製シートを形成し、そのシートを低融点糸の融点を越える温度で熱成形することから成る形態安定化繊維製品の製造方法。
【発明の詳細な説明】
【０００１】
【発明の属する技術分野】この発明は、形態安定化繊維製品の製造方法と、その製品の専用素材として利用するアパレル用生地並びにブレードに関する。
【０００２】
【従来の技術】形態安定化が要求される繊維製品は、服、帽子、手提袋、手提バッグなど種々ある。
【０００３】この繊維製品の素材としては、織布、ニット（編物）が利用され、また、帽子等の素材としてブレード（平打ちの組紐）もよく利用されている。ところで、服、帽子などの素材生地のうち、綿、麻、或いはそれ等の繊維の混紡率を高めた糸を織成して作られる生地は特にしわがつき易い。このため、織成後の生地を樹脂加工（防しわ加工）してしわをつき難くすることがなされている。比較的しわになり難い合繊の高率混紡物に対しても、より完全な防しわ性をもたせるためにその樹脂加工がなされており、また、最近では、カッターシャツなどに対して高度な形態安定加工（ウォッシュアンドウエア加工やパーマネント加工など）も施されている。
【０００４】
【発明が解決しようとする課題】樹脂加工等で防しわ性を向上させる方法は、生地の製造工程が複雑になり、生産性やコスト面で問題がある。また、樹脂加工や特殊加工による形態安定機能は、クリーニング等によって徐々に消失するなど長続きしないことが多い。
【０００５】また、ニットは、織布に比べてしわになり難い反面、形崩れし易い欠点をもつが、防しわのための樹脂加工でニットに形状保持機能をもたせるのは難しい。
【０００６】さらに、帽子用真田と称される帽子用ブレードの場合、材料として天然繊維の中で最も腰の強い麻がよく用いられているが、麻のブレードで作った帽子は小さく折り畳むと折り目が残って体裁が悪くなる。また、麻は水に濡れると腰が弱くなって（しなやかになって）製品が形崩れし易くなる。
【０００７】そこで、この発明は、形崩れし難く、かつしわになり難い形態安定化繊維製品を簡単に作るための製造方法と、その方法用の専用素材を提供することを課題としている。
【０００８】
【課題を解決するための手段】上記の課題を解決するため、この発明においては、下記(1)、(2)のこの発明のアパレル用生地を裁断、縫合し、しかる後、低融点糸の融点を越える温度で熱成形する方法を採る。
(1) よこ糸又は１本置きのたて糸と１本置きのよこ糸に低融点糸を用い、この低融点糸と他の糸を織成して成るアパレル用生地。
(2) ニットの地編組織の中に低融点糸を編込んで成るアパレル用生地。
【０００９】また、上記(2)のアパレル用生地を所要形状に成型編みし、しかる後、低融点糸の融点を越える温度で熱成形する方法を採る。
【００１０】さらに、下記(3)、(4)のこの発明のブレードを縫合又は織成してブレード製シートを形成し、そのシートを低融点糸の融点を越える温度で熱成形する方法を採る。
(3) 構成繊維の中に低融点糸を含ませた原糸を平打ちに組んで成るブレード。
(4) 原糸の中に低融点糸を含ませ、その低融点糸の原糸と非低融点糸の原糸を平打ちに組んで成るブレード。
【００１１】
【作用】この発明のアパレル用生地及びブレードに含まれる低融点糸がこの発明の製造方法による熱成形時に塑性変形し、その後、冷え固まって成形後の形状を保とうとする。また、熱成形時に低融点糸が他の糸に付着して糸同志の熱固定もなされ、これによっても保形性が高まる。そのため、製品にしわがつき難く、製品の形崩れも起こり難くなる。
【００１２】さらに、この発明の製造方法では、低融点糸を含む素材を用いるので、仕上げ成形を熱成形とするだけでよく、工程の複雑化やコストアップを招かない。
【００１３】
【発明の実施の形態】図１～図３に、この発明のアパレル用生地の実施形態を示す。図１、図２はいずれも織布である。これ等の織布１、２は、実際は密に織られるが、図は判り易くするために糸の配列ピッチを粗くして

表わした。

【００１４】図１の織布１は、たて糸（経糸）３と、低融点糸のよこ糸（緯糸）４を平織りしたものである。

【００１５】また、図２の織布２は、通常のたて糸３と低融点糸のたて糸５を交互に配し、さらに、通常のよこ糸６と低融点糸のよこ糸４を交互に配し、これ等を平織したものである。

【００１６】たて糸３、よこ糸６には天然繊維（綿、麻など）、合成繊維（ポリエステル、ナイロンなど）再生繊維（レーヨン、ポリノジック、キュプラ）それ等の繊維の混紡糸などを用いる。

【００１７】また、よこ糸４、たて糸５には、一緒に織込む他の糸よりも融点の低い熱可塑性樹脂、例えば、ポリ塩化ビニル、ビニロン、アクリル、ポリプロピレン、アセテート、ポリウレタンなどで形成された糸を用いる。この低融点糸のよこ糸４とたて糸５はモノフィラメントであってもよいが、糸３、６が熱可塑性樹脂で形成されている場合には、それよりも融点の低い材料樹脂を選ぶ必要がある。

【００１８】なお、図２の織布２は、２本のよこ糸、即ち、通常のよこ糸６と低融点糸のよこ糸４を交互に織込む必要があるので、図１の織布に比べて織が面倒になるが、熱成形後に得られる形態安定化の機能はこの糸配置が最も優れる。

【００１９】織布の織り方は、平織りを例示したが、この平織りに限定されるものではない。

【００２０】図３は、第３実施形態のニットを示している。このニット７は、通常の編糸８と、低融点糸の編糸９（これは編糸８よりも融点が低い）を用いて両面編したものであって、２つのゴム編組織が腹合わせになっている。ニットは、織物に比べて元々しわがつき難いが、織物よりも形崩れし易い。しかし、例示のニット７は、熱成形すると低融点糸９による保形性が生じて形崩れが起こり難くなり、しわもつき難くなる。

【００２１】平編、或いはゴム編される通常の編糸に低融点糸を添えて編成した添え編糸のニットや編組織の中に低融点糸を編込んだレース地なども形態安定機能が高まり、形崩れが起こり難くなる。

【００２２】図４は、この発明の生地を素材にして作った帽子の一例である。この帽子１０に採用した生地は、天然繊維のたて糸と低融点糸であるポリ塩化ビニルのよこ糸を杉織した後、表面を起毛処理した織布１であり、その生地を所要形状に裁断、縫合し、さらに、成形型を用い、ポリ塩化ビニルの融点よりも高い温度で熱生成して帽子１０に仕立ててある。この帽子１０は小さく折り畳んでバッグや服のポケットなどに収納しても、取り出して元の状態に広げると折り目が自然に消え、体裁が悪くならない。

【００２３】なお、この発明の生地は、服、カーテン、手提袋など、他の繊維製品の素材としても利用できる。

【００２４】図５は、ブレードの実施形態である。このブレード１１は、数本（図は２本）のたて糸１２を中に通して数本（通常６～１２本）の原糸１３を平打ちに組んだものである。

【００２５】原糸１３は、図６（ａ）に示すように、麻の繊維１４の中に低融点糸（ここではポリ塩化ビニルの単繊維を用いた）１５を数本加えてこれを軽く撚り合わせたものや、図６（ｂ）に示すように、麻の繊維１４の束の外周に低融点糸１５を巻き沿わせたもの、或いは図６（ｃ）に示すように、低融点糸１５を芯にしてその外周に麻の繊維１４を軽く撚り合わせたものなどを用いた。

【００２６】低融点糸１５は、平打ちに組む原糸１３の何本かを低融点糸に置き代える形で加えてもよい。

【００２７】なお、原糸１３を構成する繊維１４は、低融点糸１５よりも融点の高い繊維であればよく、麻に限定されない。

【００２８】図７は、図５のブレード１１を部分的にオーバラップさせて渦状に巻き、隣り合うブレードの重ね部を縫合して（１６が縫い目）して作られた円形シート１７を示している。この円形シート１７を成形型（図示せず）を用いて低融点糸の融点以上の温度（他の糸は溶けたりちぢれたりしない温度）で熱成形し、図８に示すような帽子１８に仕上げる。

【００２９】このブレードは、籠、手提袋、手提バッグなど、他の製品の素材としても利用できる。そのブレードを縫合して継ぎ合わせる方法や、図９に示すように平織する方法で材料シートを作り、そのシートを加工すれば様々な形態安定化繊維製品を作ることができる。

【００３０】

【発明の効果】以上述べたように、この発明では素材と成すアパレル用生地やブレードに低融点糸を含ませ、その生地やブレードで作られた製品を熱成形することにより低融点糸を変形させ、さらに、他の糸に付着させるので製品の形態安定性を簡単に、しかも、コストをかけずに高めることができる。

【００３１】なお、この発明の方法で得られる製品はしわがつき難く、形態の回復性に優れるため、ブレード製帽子等も小さく折り畳んでバッグ等に収納することができる。

【００３２】また、熱成形後の低融点糸は水に濡れても成形後の形を保つので、水を吸うセルロース系の繊維（綿、麻など）を用いた生地やブレードで作られる繊維製品にこの発明を適用すると、水濡れ、洗濯等による形態悪化を防止できる。

【図面の簡単な説明】

【図１】この発明の生地（織布）の実施形態の組織図


【図２】他の実施形態（織布）の組織図

【図３】更に他の実施形態（ニット）の組織図


【図４】図１の生地で作った繊維製品の一例（帽子）を

示す斜視図
【図５】この発明のブレードの概要を示す平面図
【図６】低融点糸を含む原糸の具体例を示す図
【図７】ブレードを渦状に縫合して得られる円形シートの平面図
【図８】図７の円形シートを熱成形して得られるブレード製帽子の一例を示す斜視図
【図９】ブレードを平織りしてできるシートの平面図
【符号の説明】
１、２　織布
３　通常のたて糸
４　低融点糸のよこ糸
５　低融点糸のたて糸
６　通常のよこ糸
７　ニット
８　編糸
９　低融点糸の編糸
１０　帽子
１１　ブレード
１２　たて糸
１３　原糸
１４　麻の繊維
１５　低融点糸
１６　縫い目
１７　円形シート
１８　ブレード製帽子


【図１】

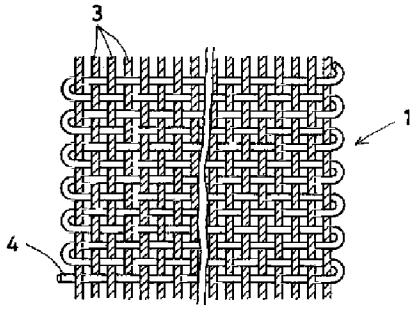


【図２】

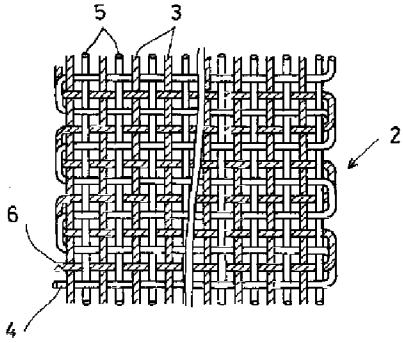


【図５】

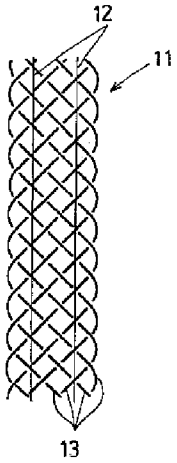


【図３】




【図４】

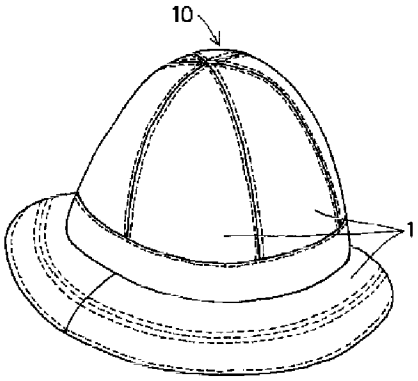


【図６】

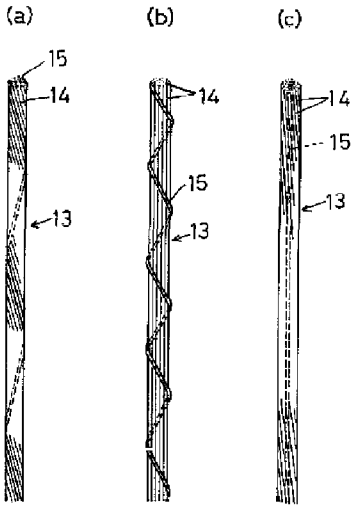


【図９】



【図７】

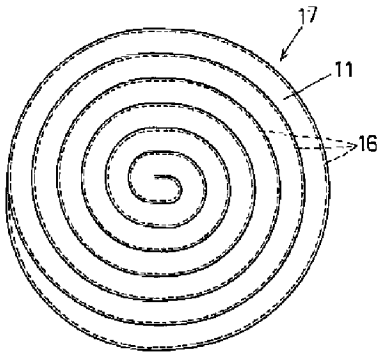

【図８】

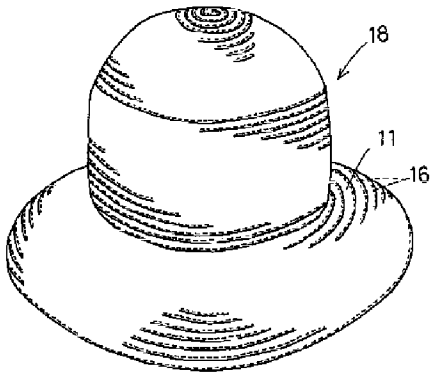

フロントページの続き

(72)発明者　植田　政彦
大阪府大阪市平野区平野上町１丁目10番14号

(72)発明者　福山　満
大阪府羽曳野市碓井４丁目22番２号

(72)発明者　阿部　澄夫
兵庫県神戸市須磨区横尾２丁目26番地の４

(19) BUNDESREPUBLIK DEUTSCHLAND

DEUTSCHES PATENTAMT

(12) **Offenlegungsschrift**

(10) **DE 197 38 433 A1**

(51) Int. Cl.[6]:
D 06 N 7/00
D 04 H 3/14
D 03 D 15/00
D 04 B 21/00

(21) Aktenzeichen: 197 38 433.1
(22) Anmeldetag: 3. 9. 97
(43) Offenlegungstag: 2. 4. 98

DE 197 38 433 A1

(66) Innere Priorität:
296 16 943.9 28.09.96

(71) Anmelder:
Recytex-Textilaufbereitung GmbH & Co. KG, 41751 Viersen, DE

(74) Vertreter:
Bonsmann, M., Dipl.-Ing., Pat.-Anw., 41063 Mönchengladbach

(72) Erfinder:
Schulte, Ulrich, 50996 Köln, DE; Hahnen, Ulrich, 41061 Mönchengladbach, DE

(54) Textiles Flächengebilde

(57) Die Erfindung betrifft ein textiles Flächengebilde, in das Garn mit Anteilen von größenordnungsmäßig zehn bis zwanzig Gewichtsprozenten niedrigschmelzender Bindefaser und neunzig bis achtzig Gewichtsprozenten von bei einer höheren Temperatur als die Bindefasern schmelzenden Fasern oder nichtschmelzenden Fasern eingearbeitet ist. Im Vergleich zu Laminaten wird durch Wegfall des für die Erstellung von Laminaten erforderlichen Kaschiervorganges ein Arbeitsschritt eingespart. Eine Delaminierung der Einzelkomponenten ist ausgeschlossen, da diese bindungstechnisch miteinander verbunden sind.

DE 197 38 433 A1

Beschreibung

Die Erfindung betrifft ein textiles Flächengebilde.

Aus DE-GM 94 09 763 ist ein Laminat mit einer auf einer voluminösen Warenbahn aufkaschierten textilen Oberware bekannt, bei dem die voluminöse Warenbahn als thermofusioniertes Vlies ausgebildet ist. Die Herstellung eines Laminates erfordert bei der Herstellung den Arbeitsschritt eines Kaschiervorganges. Weiterhin besteht das Problem, eine Delaminierung der Einzelkomponenten sicher auszuschließen.

Der Erfindung liegt die Aufgabe zugrunde, ein textiles Flächengebilde zu schaffen, welches die Vorteile des bekannten Laminates, nicht aber dessen Nachteile aufweist.

Zur Lösung dieser Aufgabe ist erfindungsgemäß vorgesehen, daß in das textile Flächengebilde Garn mit Anteilen von größenordnungsmäßig zehn bis zwanzig Gewichtsprozenten niedrigschmelzender Bindefaser und neunzig bis achtzig Gewichtsprozenten von bei einer höheren Temperatur als die Bindefasern schmelzenden Fasern oder nicht schmelzenden Fasern eingearbeitet ist.

Sofern es sich bei dem textilen Flächengebilde beispielsweise um eine Webware handelt, kann diese bindungstechnisch so ausgelegt werden, daß bei der Erstellung ein sogenannter "Unterschuß" miteingetragen und eingebunden wird. Dieser Unterschuß ist von der Dekoroberseite her nicht sichtbar. Der Unterschuß kann sowohl in der Garnstärke (somit im Gewicht pro Quadratmeter) und der Garnzusammensetzung variiert werden. Es können beispielsweise niedrigschmelzende Bindefasern mit in das Garn eingearbeitet sein (zehn bis fünfzig Gewichtsprozente), die bei einer niedrigeren Temperatur schmelzen als die Restfasern.

Zweckmäßige Ausgestaltungen der Erfindung ergeben sich aus den Unteransprüchen.

Ähnlich einem "Unterschuß" bei einer Webware können andere textile Konstruktionen, wie Wirk-, Rascheln und Strickware, mit den in den Schutzansprüchen beschriebenen Garnen kombiniert werden.

Bei der Erfindung ist vorteilhaft, daß im Vergleich zu Laminaten durch Wegfall des für die Erstellung von Laminaten erforderlichen Kaschiervorganges ein Arbeitsschritt eingespart wird. Eine Delaminierung der Einzelkomponenten ist ausgeschlossen, da diese bindungstechnisch miteinander verbunden sind.

Weiterhin ist eine deutlich verbesserte Drapierbarkeit der Stoffe vorteilhaft, da einerseits keine Verhärtung durch ein Klebemedium entsteht und andererseits der "innige" Verbund von Ober- und Unterware selbst bei kritischen Radien zu keiner Knickbildung führt.

Zudem ist vorteilhaft, daß der Unteraufbau des textilen Flächengebildes durch entsprechende Verfahren aufgerauht werden kann, wodurch die Einzelfasern eine Orientierung in die "dritte Dimension" erhalten. Durch Aktivierung der niedrigschmelzenden Fasern kann diese "Volumigkeit" fixiert werden, wodurch eine Polsterwirkung erzielt wird.

Patentansprüche

1. Textiles Flächengebilde, **dadurch gekennzeichnet,** daß in das Flächengebilde Garn mit Anteilen von größenordnungsmäßig zehn bis zwanzig Gewichtsprozenten niedrigschmelzender Bindefaser und neunzig bis achtzig Gewichtsprozenten von bei einer höheren Temperatur als die Bindefasern schmelzenden Fasern oder nichtschmelzenden Fasern eingearbeitet ist.

2. Textiles Flächengebilde nach Anspruch 1, dadurch gekennzeichnet, daß das Garn eine Bikomponenten-Polyesterfaser aufweist, und daß die bei einer höheren Temperatur als Bindefasern schmelzenden Fasern oder nichtschmelzenden Fasern solche auf der Basis von Polyester oder Polyestermischgeweben sind.

3. Textiles Flächengebilde nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die bei einer höheren Temperatur als Bindefasern schmelzenden oder nichtschmelzenden Fasern recyclierte Fasern sind.

4. Textiles Flächengebilde nach Anspruch 3, dadurch gekennzeichnet, daß die recyclierten Fasern Reißspinnfasern sind.

5. Textiles Flächengebilde nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß der Anteil an niedrigschmelzender Bindefaser bei fünfzehn Gewichtsprozenten liegt.

6. Textiles Flächengebilde nach einem der Ansprüche 1 bis 5, dadurch gekennzeichnet, daß der Anteil an niedrigschmelzenden Bindefasern bei dreißig Gewichtsprozenten liegt.

7. Textiles Flächengebilde nach Anspruch 6, dadurch gekennzeichnet, daß eine thermoplastische Faser mit einem ähnlichen Hochfrequenz-Schweißverhalten wie Polyvenylchlorid Verwendung findet.

8. Textiles Flächengebilde nach einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß das textile Flächengebilde eine Webware ist.

9. Textiles Flächengebilde nach einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß das textile Flächengebilde eine Wirkware ist.

10. Textiles Flächengebilde nach einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß das textile Flächengebilde eine Raschelware ist.

11. Textiles Flächengebilde nach einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß das textile Flächengebilde eine Strickware ist.

12. Textiles Flächengebilde nach Anspruch 8, dadurch gekennzeichnet, daß das Garn als Unterschuß in die Webware eingetragen ist.

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 758 693 A1

(12) EUROPÄISCHE PATENTANMELDUNG

(43) Veröffentlichungstag:
19.02.1997 Patentblatt 1997/08

(51) Int. Cl.[6]: **D04B 1/14**

(21) Anmeldenummer: **95112661.4**

(22) Anmeldetag: **11.08.1995**

(84) Benannte Vertragsstaaten:
AT BE CH DE ES FR GB IT LI NL SE

(71) Anmelder: **BUCK, Alfred**
D-72108 Rottenburg (DE)

(72) Erfinder: **BUCK, Alfred**
D-72108 Rottenburg (DE)

(74) Vertreter: **Rüger, Rudolf, Dr.-Ing. et al**
Patentanwälte Rüger, Barthelt & Abel,
Postfach 348
73704 Esslingen (DE)

(54) Halbzeug für Verbundwerkstoff

(57) Ein Fertigprodukt oder ein insbesondere zur Herstellung von Formteilen geeignetes Halbzeug (20,30) besteht aus einer Maschenware, in der wenigstens ein Faden (4) aus einem ersten Material und wenigstens ein anderer Faden (5) aus einem zweiten Material verarbeitet sind. Zumindest das zweite Material ist thermoplastisch und hat eine Erweichungstemperatur (Glasumwandlungspunkt), die niedriger liegt als die Erweichungstemperatur des ersten Materials. Das zweite Material ist ein Material, das sich bei Erwärmung über eine vorbestimmte Temperatur stoffschlüssig mit dem ersten Material und mit sich selbst verbindet.

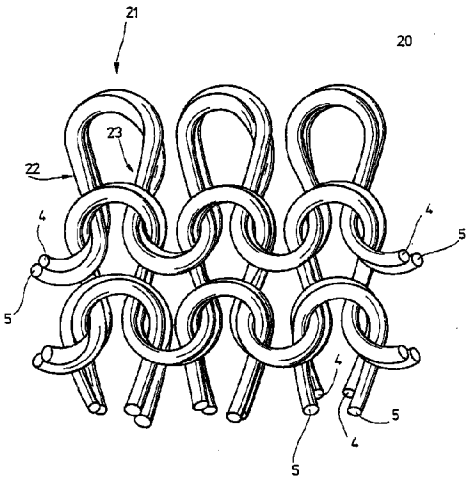


Fig. 1

EP 0 758 693 A1

Beschreibung

Grundsätzlich eignen sich thermoplastische Kunststoffe sehr gut dazu, komplizierte Formteile herzustellen. Hierzu sind unterschiedliche Vorgehensweisen bekannt.

Der thermoplastische Kunststorf kann in Gestalt von Pellets vorliegen und wird in entsprechenden Spritzgußmaschinen aufgeschmolzen und in die Spritzgußform unter Druck eingefüllt. Derartige Formteile haben nur eine begrenzte Festigkeit, die sich ausschließlich aufgrund der Eigenschaften des thermoplastischen Kunststoffes ergibt. Allerdings sind mit dem Spritzgußverfahren bislang im wesentlichen nur Teile hergestellbar, die kein allzu ungünstiges Verhältnis zwischen der Wandstärke und der Fläche der betreffenden Wand aufweisen.

Bei ungünstigeren Verhältnissen, also Teilen, die, bezogen auf ihre flächige Ausdehnung, verhältnismäßig dünn sind, wird eine andere Vorgehensweise bevorzugt, die darin besteht, den thermoplastischen Kunststoff zunächst als große Folie zu extrudieren, die sodann im Tiefziehverfahren in die endgültige Gestalt gebracht wird. Auch diese Teile haben eine geringe Festigkeit. Zum Erhöhen der Festigkeit bleibt nichts anderes übrig, als Fasern einzubetten. In diesem Falle wird eine andere Technik angewendet, die darin besteht, daß lange Glasfasern in ein noch nicht vollständig ausgehärtetes thermoplastisches Harz eingebettet werden und diese zähe Masse in eine Form gegeben wird, in der die Masse in die entsprechende Gestalt umgeformt und ausgehärtet wird. Nachteilig bei diesem Verfahren ist die begrenzte Haltbarkeit des Halbzeugs, das dazu neigt, im Laufe der Zeit vollständig auszuhärten, so daß es nicht mehr die gewünschte, etwa kaugummiartige Konsistenz hat. Im ausgehärteten Zustand kann es in der Regel in komplizierte Formen nicht mehr eingebracht werden.

Es wurde deswegen bereits versucht, in die Form die Fasern einzulegen und anschließend die Form mit dem thermoplastischen Material zu füllen. Auch hierbei sind Probleme aufgetreten, die durch das Fasermaterial hervorgerufen werden, das einerseits von dem thermoplastischen Kunststoff zur Seite gedrückt wird und andererseits eine gleichmäßige Durchdringung verhindert, da das Fasermaterial für den thermoplastischen Kunststoff wie eine Art Filter wirkt.

Die für großflächige Teile bislang praktikabelste Technik besteht darin, auf einen Formkörper ein Glasgewebe oder Glasrovings Schicht für Schicht aufzulaminieren. Diese Laminiertechnik ist außerordentlich aufwendig und deswegen nur bei von Haus aus teuren Gegenständen einigermaßen rentabel.

Darüber hinaus ist es aus der DE-A-41 37 406 bekannt, ein Hybridgarn herzustellen, das aus ca. 64% Kohlenstoffasern und 38% Polyamidfasern besteht. Dieses Garn wird zu einem textilen Flächengebilde verarbeitet, beispielsweise ein Gestrick. Durch Wärmeeinwirkung bei gleichzeitigem Pressen des Gestricks kann daraus ein faserverstärkter Formkörper erzeugt werden. Allerdings hat die Praxis gezeigt, daß dieses Hybridgarn eine extreme statische Aufladung beim Stricken zeigt. Die starke elektrostatische Aufladung behindert den Strickvorgang, so daß ein Stricken oder Wirken parktisch nicht möglich ist. Das Hybridgarn kann nur zu anderen textilen Flächengebilden, wie Geweben, Gelegen und Wickelkörpern verarbeitet werden, also in Verfahren, bei denen die elektrostatische Aufladung nicht auftritt oder nicht stört.

Ferner kann bei dem Hybridgarn der verarbeitende Betrieb das Mischungsverhältnis zwischen den beiden Materialien nicht variieren. Das Mischungsverhältnis ist durch den Aufbau des Hybridgarns fest vorgegeben.

Ausgehend hiervon ist es Aufgabe der Erfindung, ein Halbzeug zur Herstellung großflächiger Formteile zu schaffen, das mit geringem Aufwand herstellbar ist.

Diese Aufgabe wird erfindungsgemäß durch ein Halbzeug mit den Merkmalen des Anspruches 1 bzw. des Anspruches 2 gelöst.

Die Verwendung der Maschenware, die aus Fäden zweierlei Materials besteht, sorgt dafür, daß in jedem genügend großen Volumenelement des textilen Flächengebildes vergleichbare Mengen des ersten und des zweiten Materials vorhanden sind. Das so hergestellte Halbzeug kann in beliebige Formen eingelegt werden, die lediglich erwärmt werden müssen, um das thermoplastische zweite Material aufzuschmelzen, d.h. auf eine Temperatur oberhalb des Glasumwandlungspunktes zu bringen, so daß es sich stoffschlüssig, d.h. dauerhaft und fest mit den Fäden aus dem ersten Material verbinden kann. Wegen der gleichmäßigen oder gleichförmigen Verteilung der Fäden des zweiten Materials in dem Halbzeug befindet sich der als Bindemittel dienende thermoplastische Kunststoff bereits von Haus aus an derjenigen Stelle, an der er die Fäden des ersten Materials miteinander verkleben soll. Er braucht keine weiten Strecken zu fließen, da unmittelbar das Bindemittel in Gestalt der Fäden aus dem zweiten Material bereitsteht. Deformationen des textilen Flächengebildes durch Fließen des thermoplastischen Materials sind dadurch ebenso ausgeschlossen wie Fehlstellen, hervorgerufen durch einen Mangel an thermoplastischem Kunststoff zum Verbinden der Fäden aus dem ersten Material.

Ferner hat das Halbzeug den Vorteil, daß das Mischungsverhältnis zwischen den beiden Materialien im verarbeitenden Betrieb praktisch beliebig frei wählbar ist.

Eventuell sonst auftretende elektrostatische Aufladung kann dadurch verhindert werden, daß das sich elektrostatisch aufladende Material vor dem Verarbeitungsvorgang entsprechend vorbehandelt wird. Aufgrund der Tatsache, daß beide Materialien getrennt vorbearbeitet werden können, lassen sich Probleme beim Verstricken weitgehend verhindern.

Da der thermoplastische Kunststoff über die gesamte Fläche des Halbzeugs gleichmäßig verteilt zur Verfügung steht, ist die Größe des herzustellenden Fer-

Skechers EX1013-p. 166
Skechers v Nike

tigfabrikats praktisch unbegrenzt. Durch Übereinanderlegen mehrerer Lagen des erfindungsgemäßen Halbzeugs können beliebig starke und in der Fläche beliebig große Werkstücke ohne weiteres hergestellt werden.

Ein weiterer wesentlicher Vorteil des erfindungsgemäßen Halbzeugs besteht darin, daß fertig ausgehärteter und somit dauerhafter thermoplastischer Kunststoff verwendet wird. Das Halbzeug unterliegt vor der Verarbeitung keiner besonderen Alterung, die eine nachträgliche Verarbeitung erschweren würde. Es ist auch weder klebrig, noch sind besondere Vorsichtsmaßnahmen bei der Handhabung notwendig, wie dies bei manchen, nicht vollständig ausgehärteten Thermoplasten der Fall ist.

Da das Halbzeug aus im wesentlichen nicht miteinander verbundenen einzelnen Fäden besteht, kann es auch leicht in nahezu jede beliebige Form gebracht werden. Einem Umformen beim Einlegen in das betreffende Formgebungswerkzeug setzt es keine besonderen Kräfte entgegen.

Falls aus bestimmten anderen Gesichtspunkten heraus für das erste Material ein Stoff in Frage kommt, der sich nicht unmittelbar mit dem zweiten Material stoffschlüssig verbindet, besteht die Möglichkeit, die Fäden des ersten Materials mit einem als Haftvermittler dienenden dritten Material vor der Verarbeitung zu beschichten.

Zweckmäßigerweise hat das zweite Material ein Formgedächtnis, derart, daß es bei Erwärmung über eine vorbestimmte Temperatur und anschließende Abkühlung den Verlauf beibehält, den es während der Erwärmung inne hatte. Dadurch kann erreicht werden, daß bei der Herstellung des Halbzeugs die Struktur in bestimmter Weise vorher festgelegt wird, wodurch beispielsweise die von den Fäden des ersten Materials gebildete Struktur unter einer vorbestimmten Vorspannung gehalten werden.

Das erste Material ist vorzugsweise kein organisches Material und kann aus Stoffen wie Metall, Keramik oder anderen anorganischen Verbindungen ausgewählt sein.

Der mechanische Aufbau der Fäden des ersten Materials und der Fäden des zweiten Materials kann entsprechend den mechanischen Anforderungen bei der Herstellung, Verarbeitung oder den Anforderungen an das Fertigprodukt ausgewählt werden. So ist es beispielsweise besonders einfach, wenn die Fäden aus dem zweiten Material Endlosgarne oder Monofile sind, da sich der thermoplastische Kunststoff ohne weiteres in diese Form bringen läßt. Bei Karbonfasern oder ähnlichen Fasern sind Endlosfasern unter Umständen nur bedingt herstellbar, weshalb Garne aus Stapelfasern dort zweckmäßig sein können.

Für die Gestricke oder Gewirke kommen grundsätzlich alle Bindungsarten in Frage, wobei einfache Bindungsarten bevorzugt werden, weil sie die geringste Anzahl von Kreuzungspunkten im Bereich der Maschen aufweisen. Wegen der einfacheren Verarbeitung wird einfaches rechts/links Gestrick bevorzugt, weil bei diesem Gestrick ohne weiteres lange Maschenschenkel erzeugt werden können.

Die langen Maschenschenkel wiederum ergeben eine gute Festigkeit des aus dem erfindungsgemäßen Halbzeug hergestellten Fertigproduktes.

Bei der Maschenware können die Fäden aus dem ersten und dem zweiten Material entweder zufällig verteilt an der Vorder- und der Rückseite liegen, wodurch eine leichte gleichmäßige Durchdringung des aus den ersten Fäden gebildeten Gestricks mit dem thermoplastischen Material erzielt wird. Andererseits kann auch eine sogenannte platierte Ware verwendet werden, bei der sich der thermoplastische Faden ausschließlich auf einer und der nichtthermoplastische Faden auf der anderen Seite befindet. Wird ein solches Halbzeug zum Fertigprodukt verarbeitet, kann durch entsprechende kurze Einwirkung von Wärme eine vollständige Durchdringung des Gestricks aus den Fäden des ersten Materials durch den thermoplastischen Kunststoff verhindert werden, wodurch auf einer Seite der Gestrickcharakter erhalten bleibt.

Die Verarbeitung des Halbzeugs läßt sich vereinfachen, wenn es als eben liegendes Flächengebilde mit einer gewissen inneren Spannung vorfixiert ist. Diese Vorfixierung läßt sich entweder erreichen, indem das Halbzeug auf eine Temperatur erwärmt wird, bei der das zweite Material sich noch nicht stoffschlüssig mit anderen Teilen des Halbzeugs verbindet, aber bereits Formgedächtnis auf den Zustand umprogrammiert wird, den es während der Erwärmung einnimmt. Durch anschließendes Abkühlenlassen auf Umgebungstemperatur behalten dann die Fäden des zweiten Materials im wesentlichen ihre Gestalt, in die sie während des Erwärmens auf die Fixiertemperatur gebracht wurden. Ein solches Halbzeug ist nach wie vor sehr elastisch.

Es besteht auch die Möglichkeit, die Temperatur beim Fixieren weiter zu erhöhen, so weit, bis bereits Teile der Fäden des zweiten Materials beginnen, sich stoffschlüssig mit anderen Teilen des Halbzeugs zu verbinden. Hierdurch entsteht eine punktuelle Verbindung der Fäden des zweiten Materials mit sich selbst oder mit Fäden des ersten Materials. Nach dem Abkühlen auf die Umgebungstemperatur wird wegen der punktuellen Verbindung ein vergleichsweise recht steifes Halbzeug erhalten,das aber dennoch eine begrenzte Beweglichkeit hat und ohne Schaden auch in komplizierte Formen eingelegt werden kann, insbesondere dann, wenn während des Einlegens gleichzeitig durch Heizen die Fixierpunkte wiederum gelöst werden.

Der Anteil an Fäden gleichen Materials richtet sich nach der Festigkeit des Fertigproduktes bzw. dem im Fertigprodukt enthaltenen Bindemittelanteil.

In der Zeichnung sind Ausführungsbeispiele des Gegenstandes der Erfindung dargestellt. Es zeigen:

Fig. 1 ein Halbzeug in Gestalt eines rechts/links Gestricks mit zufälligem Verlauf der Fäden des zweiten Materials und

Skechers EX1013-p. 167
Skechers v Nike

Fig. 2 ein Halbzeug in Gestalt eines rechts/links Gestricks.

Fig. 1 zeigt ein Halbzeug 20 in Gestalt eines textilen Flächengebildes, das von einem rechts/links Gestrick gebildet ist. Das rechts/links Gestrick besteht aus zwei Fäden 4 und 5 aus einem ersten und einem zweiten Material. Diese beiden Fäden 4 und 5 sind gemeinsam verstrickt, und zwar werden sie beim Verstricken so in die Nadeln der jeweiligen Strickmaschine eingelegt, daß willkürlich und zufällig verteilt der Faden 4 oder der Faden 5 an der Vorder- oder rechten Seite des Gestrikkes 20 erscheint. So ist beispielsweise bei einer Masche 21 der Faden 4 im linken Maschenschenkel 22 vorne, während er im rechten Maschenschenkel 23 an der vom Betrachter abgewandten Rückseite verläuft.

Das erste Material, aus dem der Faden 4 besteht, ist bevorzugt kein organisches Material, sondern ein Material, das aus den Stoffen Metall, Keramik oder sonstige anorganische Verbindungen wie Mineralfasern ausgewählt ist. Der Faden 5 dagegen besteht aus einem thermoplastischen Kunststoff. Als thermoplastisches Material kommt jeder Kunststoff in Frage, der geeignet ist, sich durch Erwärmen stoffschlüssig mit sich selbst oder dem Material für den ersten Faden 4 zu verbinden. Falls die Haftung unzureichend ist, besteht auch die Möglichkeit, den ersten Faden 4 mit einem dritten Material zu beschichten, das als Haftvermittler oder Haftbrücke zwischen dem zweiten Material und dem ersten Material dient.

Die Fäden 4 können Garne, Spinnfasergarne, Endlosgarne, Monifile, gefachte Garne oder Zwirne sein, ebenso wie die Fäden 5 Garne, Spinnfasergarne, Endlosgarne, Monofile, gefachte Garne oder Zwirne sein können, wobei die Art des Fadens 4 von der Art des Fadens 5 abweichen kann. Zweckmäßigerweise sind die Fäden 5 aus dem zweiten Material, dem thermoplastischen Kunststoff, Endlosgarne oder Monofile oder daraus hergestellte Zwirne, da es ohne weiteres möglich ist, entsprechende Endlosfilamente herzustellen.

Das Gestrick 20 kann als Flachgestrick auf einer Flachstrickmaschine oder als Schlauch auf einer Rundstrickmaschine erzeugt werden. Zweckmäßigerweise wird es unmittelbar nach dem Stricken durch Erwärmen fixiert, wobei zwei Fälle unterschieden werden können. Im einen Fall wird beim Fixieren die Temperatur des Gestricks 20 nur so weit erhöht, daß der aus dem thermoplastischen Kunststoff bestehende Faden 5 noch nicht aufschmilzt, sondern gerade eben kräftefrei den Verlauf annimmt, den das Gestrick 20 während des Fixierens aufgrund außen angreifender Kräfte annimmt. Sodann läßt man das Gestrick 20,ohne die von außen angreifenden Kräfte zu verändern, sich wieder auf Raumtemperatur abkühlen, womit die Fäden 5 aus dem thermoplastischen Kunststoff dauerhaft in die gewünschte Maschenstruktur umgeformt sind. Selbst beim Wegnehmen der äußeren Vorspannkräfte springt das Gestrick 20 nicht mehr in seine ursprüngliche Gestalt zurück. Ein solcher maßen vorfixiertes Gestrick 20 hat praktisch die ursprüngliche Schmiegsamkeit und läßt sich ohne Kraftaufwand in nahezu jede beliebige Form bringen,und das praktisch faltenfrei.

Eine andere Möglichkeit der Vorfixierung besteht darin, die Temperatur des Gestricks 20 so weit zu erhöhen, bis lokal der Faden 5 aus dem thermoplastischen Kunststoff an der Oberfläche klebrig wird und sich an den Kreuzungsstellen mit den darüber oder darunter verlaufenden anderen Fäden 4, 5 stoffschlüssig verbindet. Nach dem Abkühlen auf Umgebungstemperatur ist ein punktuell bereits verfestigtes Gewebe erhalten, das wesentlich steifer ist als das, das erhalten wird, wenn die Erwärmungstemperatur gerade nur so weit getrieben wird, bis das Formgedächtnis des thermoplastischen Kunststoffes auf den anderen Verlauf des Fadens 4 umprogrammiert wird.

Das so erhaltene Gestrick 20 kann beim Verwender in eine beheizbare Form eingelegt werden, die das Halbzeug 1 auf eine Temperatur bringt, bei der die Fäden 5 aus dem zweiten Material aufschmelzen, so daß sich deren Material gleichmäßig über die gesamte Fläche verteilt und dadurch die in dem aufgeschmolzenen Material eingebetteten Fäden 4 aus dem ersten Material stoffschlüssig miteinander durch Verkleben verbindet. Nach dem Erkalten wird ein in sich steifes und verfestigtes Formteil, das auch eben sein kann, erhalten.

Das in Fig. 1 dargestellte Gestrick 20 kann entweder das Fertigprodukt sein, wenn es beispielsweise eine Tapete bilden soll oder es ist ein Halbzeug, aus dem, wie vorher beschrieben, Formteile gepreßt werden können. Beim Pressen stellen aie aus dem thermoplastischen Kunststoff bestehenden Fäden den gleichmäßiger verteilten Bindemittelvorrat dar, mit dessen Hilfe die im fertigen Formteil eingebettete Verstärkung aus den verstrickten Fäden 4 eingehüllt ist.

Es hat sich gezeigt, daß besonders feste Formteile erhalten werden können, wenn das Stricken so erfolgt, daß die Maschenschenkel 22, 23 eine Länge von größer 2 mm aufweisen. Vorzugsweise beträgt die Länge der Maschenschenkel 22, 23 zwischen 2 mm und 12 mm, besser zwischen 4 mm und 8 mm. Unter bestimmten Umständen können besonders gute Verhältnisse mit 6 mm Schenkellänge erzielt werden.

Wie vorerwähnt, kann das Verhältnis zwischen der Menge an Bindemittel zu der Menge an Verstärkungseinlage durch das Volumenverhältnis zwischen den Fäden 4 und den Fäden 5 gesteuert bzw. eingestellt werden.

Weil der Faden 4 aus dem thermoplastischen Kunststoff zufällig verteilt an der Vorder- und an der Rückseite des Gestricks 20 liegt, entsteht beim Pressen des Halbzeugs in den entsprechenden Formkörper ein Formkörper, bei dem die Einlage weitgehend in der Mitte verläuft, d.h. an beiden Seiten der Einlage ist thermoplastisches Bindemittel vorhanden.

Wenn es gewünscht ist, daß das Bindemittel sich vorzugsweise auf einer Seite des Formteils befindet, während die andere Seite von dem Bindemittel weitge-

Skechers EX1013-p. 168
Skechers v Nike

hend frei ist, kann das Gestrick als platierte Ware hergestellt werden, wie dies in Fig. 3 dargestellt ist. Bei diesem Gestrick 30 liegt der Faden 5 beispielsweise immer nur an der vom Betrachter abliegenden rechten Seite des Gestricks, während der Faden 4 an der dem Betrachter zugekehrten linken Seite verläuft.

In den beiden Fig. 1 und 2 ist jeweils ein einfaches rechts/links Gestrick gezeigt. Dieses Gestrick ist auch mit großer Länge der Maschenschenkel verhältnismäßig einfach herzustellen. Allerdings ist das gezeigte rechts/links Gestrick keineswegs die einzige geeignete Bindungsart. Vielmehr kommen auch rechts/rechts/ oder links/links Gestricke sowie gegebenenfalls Interlockware in Betracht. Schließlich versteht sich, daß Halbzeug mit vergleichbaren Eigenschaften auch als Wirkware bzw. Kettenwirkware hergestellt werden kann. Der Vorteil einer Wirkware liegt vor allen Dingen darin, daß das Halbzeug in Richtung parallel zu zwei unter einem spitzen Winkel zueinander verlaufenden Achsen eine recht hohe Zugfestigkeit aufweist.

In jedem Fall ist die Weiterverarbeitung,wie oben beschrieben, wobei ein wesentlicher Vorteil darin besteht, daß der mit verarbeitete Faden 5 oder gegebenenfalls mehrere Fäden 5 aus thermoplastischem Material praktisch keine Alterung aufweisen, womit das Halbzeug 20 oder 30 beliebig lange bis zur Verarbeitung in das Formteil lagerfähig ist. Außerdem ist der Faden 5 aus thermoplastischem Kunststoff bei Umgebungstemperatur nicht klebrig, was bei der Weiterverarbeitung ebenfalls einen erheblichen Vorteil darstellt.

Wegen des überall gleichen Mischungsverhältnisses zwischen dem Fadenanteil aus dem ersten Material und dem Fadenanteil aus dem zweiten Material, nämlich dem thermoplastischen Kunststoff, besteht in jedem Volumenelement des Halbzeugs 20 oder 30 der gleiche Vorrat an Bindemittel, gebildet durch den Faden 5 aus thermoplastischem Kunststoff. Beim Verpressen braucht das Bindemittel nur Strecken entsprechend der Größe der Maschenweite zurückzulegen. Dadurch können großtechnisch rationell flächige Formteile hergestellt werden, die sonst nur mit Hilfe einer Laminiertechnik produzierbar wären.

Patentansprüche

1. Fertigprodukt oder insbesondere zur Herstellung von Formteilen geeignetes Halbzeug (20,30), bestehend aus einer Maschenware, in der wenigstens ein Faden (4) aus einem ersten Material und wenigstens ein Faden (5) aus einem zweiten Material verarbeitet sind,

   wobei zumindest das zweite Material thermoplastisch ist,

   das zweite Material eine Erweichungstemperatur (Glasumwandlungspunkt) aufweist, die niedriger liegt als die Erweichungstemperatur des ersten Materials,

   das zweite Material ein Material ist, das sich bei Erwärmung über eine vorbestimmte Temperatur stoffschlüssig mit dem ersten Material und mit sich selbst verbindet, und

   die Fäden (4) aus dem ersten Material und die Fäden (5) aus dem zweiten Material über die Fläche des Flächengebildes gleichmäßig verteilt sind.

2. Fertigprodukt oder insbesondere zur Herstellung von Formteilen geeignetes Halbzeug (20,30), bestehend aus einer Maschenware, in der wenigstens ein Faden (4) aus einem ersten Material und wenigstens ein Faden (5) aus einem zweiten Material verarbeitet sind,

   wobei die Fäden (4) aus dem ersten Material mit einem dritten Material beschichtet sind,

   zumindest das zweite Material thermoplastisch ist,

   das zweite Material eine Erweichungstemperatur (Glasumwandlungspunkt) aufweist, die niedriger liegt als die Erweichungstemperatur des ersten Materials,

   das zweite Material ein Material ist, das sich bei Erwärmung über eine vorbestimmte Temperatur stoffschlüssig mit dem dritten Material und mit sich selbst verbindet, und

   die Fäden (4) aus dem ersten Material und die Fäden (5) aus dem zweiten Material über die Fläche des Flächengebildes gleichmäßig verteilt sind.

3. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß das zweite Material ein Formgedächtniss aufweist, derart, daß es bei Erwärmung über eine vorbestimmte Temperatur und anschließender Abkühlung den Verlauf beibehält, den es während der Erwärmung inne hatte.

4. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß das erste Material kein organisches Material ist.

5. Fertigprodukt oder Halbzeug nach Anspruch 4, dadurch gekennzeichnet, daß das erste Material aus den Stoffen Metall, Keramik und sonstige anorganische Verbindungen ausgewählt ist.

6. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Fäden (4) aus dem ersten Material Garne, Spinnfasergarne, Endlosgarne, Monofile, gefachte Garne oder Zwirne sind oder aufweisen.

7. Fertigprodukt oder Halbzeug nach Anspruch 6, dadurch gekennzeichnet, daß zumindest die Fäden (4) aus dem ersten Material Einzelfasern oder Stapelfasern aufweisen.

8. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß zumindest die

Skechers EX1013-p. 169
Skechers v Nike

Fäden (4) aus dem ersten Material gedrehte Garne sind.

9. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Fäden (5) aus dem zweiten Material Garne, Spinnfasergarne, Endlosgarne, Monofile, gefachte Garne oder Zwirne sind oder aufweisen.

10. Fertigprodukt oder Halbzeug nach Anspruch 9, dadurch gekennzeichnet, daß zumindest die Fäden (5) aus dem zweiten Material Einzelfasern oder Stapelfasern aufweisen.

11. Fertigprodukt oder Halbzeug nach Anspruch 9, dadurch gekennzeichnet, daß zumindest die Fäden (5) aus dem zweiten Material gedrehte Garne sind.

12. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Maschenware eine Wirkware ist.

13. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Maschenware ein Gestrick (20,30) ist.

14. Fertigprddukt oder Halbzeug nach Anspruch 12 oder 13, dadurch gekennzeichnet, daß das Gestrick (20,30) oder Gewirk ein rechts/links, ein rechts/rechts oder ein links/links Gestrick oder Gewirk ist.

15. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß in der Maschenware (20,30) jede Masche von Fäden (4) aus dem ersten Material und von Fäden (5) aus dem zweiten Material gebildet ist.

16. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß in der Maschenware die Fäden (4) aus dem ersten Material und die Fäden (5) aus dem zweiten Material zufällig verteilt an der Vorderseite oder an der Rückseite liegen.

17. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Maschenware eine plattierte Ware ist, bei der die Fäden (4) aus dem ersten Material auf der eine Seite und die Fäden (5) aus dem zweiten Material auf der anderen Seite der Ware liegen.

18. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Maschenware (20,30) in zumindest einer Richtung vorgedehnt und in der gedehnten Stellung fixiert ist.

19. Fertigprodukt oder Halbzeug nach den Ansprüchen 1 und 18, dadurch gekennzeichnet, daß die Richtung parallel zu den Maschenstäbchen liegt.

20. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Maschen (21) der Maschenware Maschenschenkel (22,23) mit einer Länge zwischen 2 mm und 12 mm vorzugsweise zwischen 4 mm und 8 mm bevorzugt um 6 mm aufweisen.

21. Fertigprodukt oder Halbzeug nach Anspruch 18, dadurch gekennzeichnet, daß zum Fixieren das textile Flächengebilde (20,30) auf eine Temperatur erwärmt wird, bei der es eine der Vordehnung entsprechende Gestalt annimmt, die es nach dem Abkühlen auf die Umgebungtemperatur beibehält.

22. Fertigprodukt oder Halbzeug nach Anspruch 18, dadurch gekennzeichnet, daß zum Fixieren das textile Flächengebilde (20,30) auf eine Temperatur erwärmt wird, bei der sich zumindest einige Fäden (5) aus dem zweiten Material stoffschlüssig mit den Fäden (5) aus dem zweiten Material oder dessen Beschichtung verbinden.

23. Fertigprodukt oder Halbzeug nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß der Volumenanteil an dem zweiten Material bezogen auf den Volumenanteil des ersten Materials zwischen 10% und 60% vorzugsweise zwischen 10% und 40% beträgt.

24. Tapete bestehend aus einem Fertigprodukt oder Halbzeug nach einem oder mehreren der vorhergehenden Ansprüche.

Skechers EX1013-p. 170
Skechers v Nike

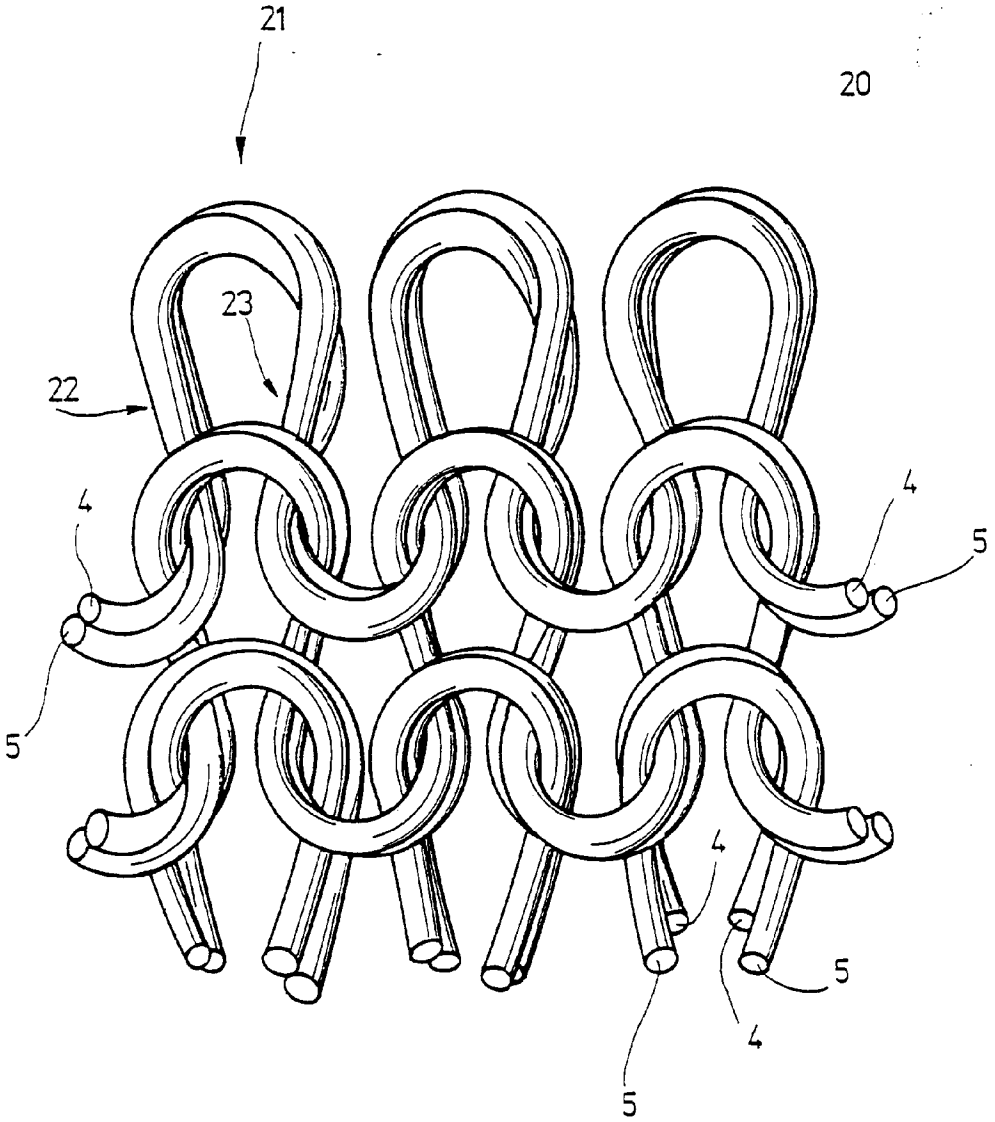


Fig. 1

Skechers EX1013-p. 171
Skechers v Nike

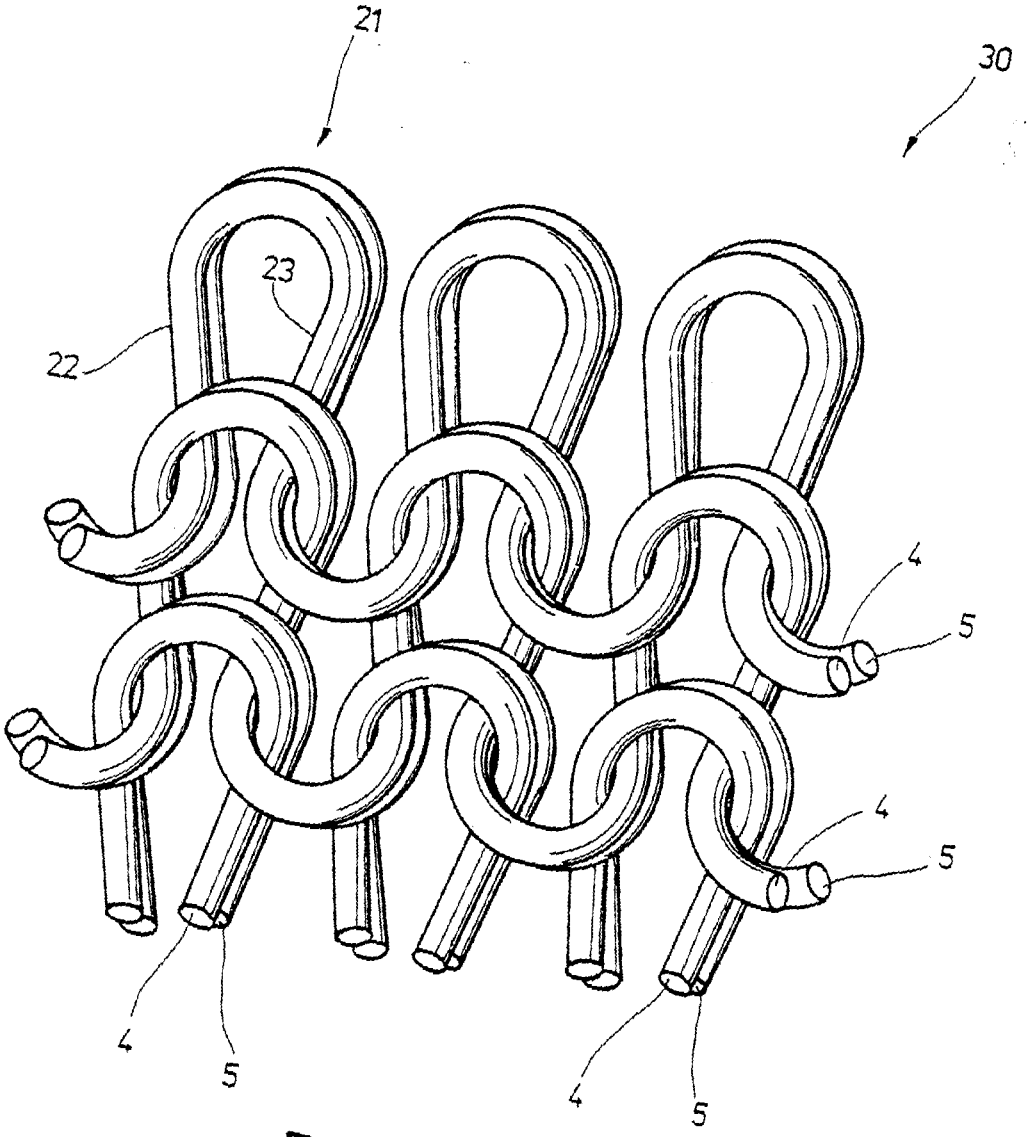


Fig. 2

Skechers EX1013-p. 172
Skechers v Nike

Europäisches Patentamt

EUROPÄISCHER RECHERCHENBERICHT

Nummer der Anmeldung
EP 95 11 2661

EINSCHLÄGIGE DOKUMENTE

Kategorie	Kennzeichnung des Dokuments mit Angabe, soweit erforderlich, der maßgeblichen Teile	Betrifft Anspruch	KLASSIFIKATION DER ANMELDUNG (Int.Cl.6)
X	WO-A-93 21367 (PROTECMA) * Seite 10, Zeile 1 - Zeile 17; Ansprüche 4-6 *	1,4,5,9, 13-15, 17,22	D04B1/14
X	EP-A-0 310 200 (STAMICARBON B.V.) * Ansprüche 1,2,4 *	1,6,9, 22,23	
E	DE-A-44 12 376 (BUCK) * Ansprüche 1-29 *	1-24	
D,A	DE-A-41 37 406 (BASF AG)		
A	FR-A-2 568 275 (ÉTABLISSEMENTS LES FILS D'AUGUSTE CHOMARAT ET CIE)		
A	US-A-2 608 078 (ANDERSON)		

RECHERCHIERTE SACHGEBIETE (Int.Cl.6)

D04B
D02G

Der vorliegende Recherchenbericht wurde für alle Patentansprüche erstellt

Recherchenort	Abschlußdatum der Recherche	Prüfer
DEN HAAG	16.Januar 1996	Van Gelder, P

KATEGORIE DER GENANNTEN DOKUMENTE

X : von besonderer Bedeutung allein betrachtet
Y : von besonderer Bedeutung in Verbindung mit einer anderen Veröffentlichung derselben Kategorie
A : technologischer Hintergrund
O : nichtschriftliche Offenbarung
P : Zwischenliteratur

T : der Erfindung zugrunde liegende Theorien oder Grundsätze
E : älteres Patentdokument, das jedoch erst am oder nach dem Anmeldedatum veröffentlicht worden ist
D : in der Anmeldung angeführtes Dokument
L : aus andern Gründen angeführtes Dokument

& : Mitglied der gleichen Patentfamilie, übereinstimmendes Dokument

EPO FORM 1503 03.82 (P04C03)

Skechers EX1013-p. 173
Skechers v Nike

Prijs *f* 3,—

OCTROOIRAAD

NEDERLAND

Ter inzage gelegde
Octrooiaanvrage Nr. 7304678
Int. Cl. D 04 h 3/08.

Indieningsdatum: 4 april 1973, 24 uur.

Datum van terinzagelegging: 8 oktober 1974.

De hierna volgende tekst is een afdruk van de beschrijving met conclusie(s), zoals deze op bovengenoemde datum werd ingediend.

Aanvrager: Arno Edgar Wildeman
Bowdon, Altrincham, Graafschap Chester, Groot-Brittannië.

Gemachtigde: Nederlandsch Octrooibureau (Dr. J. G. Frielink c.s.), Johan de Wittlaan 15, 's-Gravenhage.

Ingeroepen recht van voorrang: geen.

Korte aanduiding: Textielproduct en werkwijze voor het vervaardigen ervan.

De uitvinding heeft betrekking op een textielproduct en werkwijze voor het vervaardigen ervan.

Niet geweven textielproducten van het steek gebreide type ("stitch knitted type") vervaardigd zonder gebruikmaking van steekgarens, zijn vervaardigd en wel uit een basis-vezelvlies, door het vlies samen te drukken en samen te breien met vezelbundels, opgenomen door samengestelde naalden vanaf een zijde van het vlies naar de andere zijde, waar zij worden samengenaaid in een kettingsteekformatie met vezelbundels genomen uit opeenvolgende doordringingen om de naalden door het vlies, als beschreven in de Britse octrooischriften 1.058.483 of 1.143.827.

Het gebruik van dergelijke textielmaterialen is beperkt als gevolg van het feit, dat zelfs bij machines met

Skechers EX1013-p. 174
Skechers v Nike

een fijne naaldzetting met 28 naalden per 25 mm, de afzonderlijke naalden slechts in staat zijn tot onderling breien van minder dan de helft van de vezels in het vlies. Er is daarom onvoldoende verankering voor meer dan de helft van de vezels in het samengestelde textielmateriaal. Verschillende pogingen zijn gedaan om dit te vermijden, bijv. (a) door naaldprikken na het hechten met steken, maar dit geeft grote veranderingen in het uiterlijk van het textielmateriaal zonder de nadelen volledig te vermijden; (b) het bekleden of impregneren van het textielmateriaal met hechtmiddelen, maar hierdoor wordt ook de greep belangrijk gewijzigd, waardoor het textielmateriaal voor vele toepassingen ongeschikt is.

Onderhavige uitvinding heeft betrekking op een vervaardiging van een niet-geweven thermo-gehecht textielmateriaal in twee trappen. Eerst wordt een basis vezelvlies onderworpen aan een werkwijze van vezelbreien om het vlies te consolideren tot een gebreid vliesmateriaal en in de tweede plaats wordt dit aldus gefabriceerde materiaal onderworpen aan een werkwijze van thermo-hechten voor het verschaffen van een betere verankering van de vezels en een grotere stabiliteit van het uiteindelijke materiaal.

Bij het uitvoeren van de uitvinding kan het vlies worden vervaardigd op de een of andere bekende wijze op een vliesvormmachine, bijv. door de banen genomen van de dofferцilinder van een gebruikelijke katoen- of wolkaarde of op een pneumatische vliesvormmachine over de gehele breedte samengevouwen. De aldus verkregen vezelvliesbanen worden dan geconsolideerd tot een textielmateriaal door vezelbreien, bijv. op de een of andere steekhechtmachine, of door gebruikmaking van een vezelbreiwerkwijze.

Volgens de uitvinding is het textielmateriaal volgens de uitvinding gekenmerkt door het differentieel hechten van het textielmateriaal door het erin brengen van thermoplastisch gehechte vezels of elementairdraden.

De samenstelling van het vlies of de baan kan als volgt zijn:

Skechers EX1013-p. 175
Skechers v Nike

1. 100% smeltvezels van een enkel type synthetische vezels, bijv. nylon 6, nylon 66, polypropeen, polyester, enz.

2. Een mengsel van smeltvezels van twee of meer typen waarvan de smeltpunten variëren, bijv. 50% nylon 6 en 50% nylon 66, of 40% bicomponent vezel met een nylon 6 mantel en een nylon 66 kern en 60% nylon 66 vezel.

3. Een mengsel van niet-smelt vezels, bijv. viscose met tenminste 10% smeltvezels, bijv. nylon 6 of polypropeen.

Het textielmateriaal vervaardigd uit een van de drie vliessamenstellingen als boven aangegeven wordt vervolgens onderworpen aan een werkwijze van thermo-hechten door het materiaal te leiden door de kneep gevormd door twee rollen op de thermo-hechtmachine. Het thermo-hechten kan worden uitgevoerd onder gebruikmaking van een verwarmde en een niet-verwarmde kalanderrol, waarbij de verwarmde rol is gegraveerd of glad en de niet-verwarmde rol is hard of zacht.

De oppervlaktetemperatuur van de verwarmde rol of rollen is van belang en wordt zo gekozen dat hij hoger is dan het smeltpunt van de smeltvezels in het vezel-gebreide materiaal, waarna het materiaal van de rollen wordt genomen.
De mate van smelten en de doordringingsdiepte door het vezelgebreide textielmateriaal, waarop smelten wordt uitgevoerd, wordt geregeld door:

(a) de temperatuur van de hechtrol of -rollen;
(b) de druk uitgeoefend op het textielmateriaal in de kneep;
(c) de snelheid waarmede het vezel-gebreide textielmateriaal door de kneep passeert;
(d) de kenmerken van de roloppervlakken.

Aan de hand van de volgende voorbeelden wordt de uitvinding hierna nader beschreven.

VOORBEELD I

Een mengsel van nylon 6 en nylon 66 vezels worden gekaard op een kaarde van het woltype, dwars gevouwen en toegevoerd aan een Malivlies steek-hechtmachine onder de volgende omstandigheden:

Skechers EX1013-p. 17
Skechers v Nike

Gegevens van het vlies: nylon 6, 4 denier, 2½" 65%
nylon 66, 3 denier, 4" 35%

Malivlies
Brei-gegevens: 18 naalden per 25 mm
steeklengte 1,6 mm
materiaalgewicht 204 g/m2
snelheid 1000 steken/min.

Dit materiaal bezat goede textiel-eigenschappen, maar de oppervlakken waren zo zacht dat "pilling" optrad bij lichte wrijving.

Het vezel-gebreide materiaal werd daarna thermo-gehecht door het leiden ervan door de kneep van een calander met een verwarmde gegraveerde rol in aanraking met de zijde zonder lussen van het materiaal en een "cotton bowl" aanraking met de luszijde, in overeenstemming met de volgende omstandigheden:

Oppervlakte-temperatuur verwarmde rol 230°C
Meetdruk 1000 kg/10 cm lengte
Loopsnelheid 5 m/min.
Gepatroneerde rol met geheven vierkanten
Punten van vierkanten - 0,68 mm x 0,68 mm
Afstand tussen de punten 0,52 mm
Oppervlak van de punten 32,1% van het totale oppervlak.
Na thermo-hechting onder gebruikmaking van de "pillbox tester" van Imperial Chemical Industries Ltd. gedurende 5 uur bleek het "pilling" op de thermo-gehechte zijde van het materiaal nul te zijn en aan de luszijde te verwaarlozen.

VOORBEELD II

Een mengsel van nylon 6 en vincel wordt gekaard op een kaarde van het wol-type, dwars gevouden en toegevoerd aan een Malivlies stik-hechtmachine, onder de volgende omstandigheden:

Gegevens van het vlies: nylon 6, 3 denier 2½" 65%
"vincel 64" denier 6" 35%

7304678

Skechers EX1013-p. 177
Skechers v Nike

Malivlies
Brei-gegevens: 14 naalden per 25 mm
steeklengte 1,6 mm
gewicht textielmateriaal 1,80 g/m2
snelheid 1200 steken/min.

Als bij Voorbeeld I bezat het materiaal goede textieleigenschappen, maar was niet bevredigend als gevolg van "pilling".

Het vezel-gebreide textielmateriaal was thermo-gehecht door het leiden ervan door de kneep van een calander met een verwarmde gegraveerde rol in aanraking met een zijde van het materiaal zonder lussen en een gladde stalen onverwarmde rol in aanraking met de luszijde, in overeenstemming met de volgende omstandigheden:

Oppervlakte-temperatuur verwarmde rol 225°C
Kneepdruk 1500 kg/10 cm lengte
Loopsnelheid 5 m/min.
Gepatroneerde rol geheven vierkanten
Toppen van de vierkanten 0,68 mm x 0,68 mm
Afstand tussen de toppen 0,52 mm
Oppervlak van de toppen 32,1% van het totale oppervlak
Het thermo-gehechte materiaal bezat na 5 uur in een "pillbox tester" van Imperial Chemical Industries Ltd. een "pilling" gelijk aan nul aan de thermogehechte zijde van het materiaal en te verwaarlozen "pilling" aan de luszijde.

Als gevolg van het gebruik van een hechttemperatuur boven de smeltpunten van de nylon 6 vezel in bovengenoemde voorbeelden werd een volledig hechten van de anders losse vezels op de zijde zonder lussen van het materiaal bereikt, de verankering van de vezels veroorzaakt een te verwaarlozen "pilling" op de niet-thermo-gehechte luszijde van het materiaal.

Het plaatsen van de verwarmde rol op de zijde van het materiaal zonder lussen met een onverwarmde rol op de zijde

Skechers EX1013-p. 178
Skechers v Nike

van het materiaal met de lussen maakt differentieel hechten van het vlies op de baan met meer hechting op de achterzijde of de zijde zonder lussen en progressief minder hechting naar de lus- of voorzijde mogelijk.

Textielmaterialen vervaardigd volgens de uitvinding bezitten een zeer goede greep en drapeervermogen en zijn geschikt voor bekleding, huishoudelijke en industriële doeleinden.

C O N C L U S I E S

1. De vezel-gebreide textielmateriaal, g e k e n m e r k t door het differentieel hechten van het materiaal door de aanwezigheid van thermo-plastisch gehechte vezels of elementairdraden.

2. Materiaal volgens conclusie 1, m e t h e t k e n m e r k, dat de vezels 100% thermo-plastische of smeltvezels kunnen zijn, een mengsel van thermo-plastische opsmeltvezels van twee of meer typen, of een mengsel van thermoplastische of smeltvezels en niet-smeltvezels.

3. Werkwijze voor het vervaardigen van een vezel-gebreid textielmateriaal, g e k e n m e r k t door het onderwerpen van een vlies of baan bevattende thermo-hardende of smeltvezels, aan een vezelbrei-handeling en het leiden van het verkregen vlies, of de verkregen baan door de kneep van een verwarmde en een koude rol om de thermo-hardende of smeltvezels differentieel te smelten om het vlies op e baan tot een vezel-gebreid thermo-gehard materiaal te vormen.

4. Werkwijze volgens conclusie 2, m e t h e t k e n m e r k, dat het vlies op de baan wordt geleid door de kneep van een koude rol en een verwarmde rol met een gegrafeerd patroon daarop bij een temperatuur liggende boven d het smeltpunt van tenminste een van de thermo-plastische of smeltcomponentvezels.

7304678

****

Skechers EX1013-p. 179
Skechers v Nike

BUNDESREPUBLIK DEUTSCHLAND

KL. 71a 23/02

INTERNAT. KL. A 43b

DEUTSCHES PATENTAMT

AUSLEGESCHRIFT 1 084 173

G 15395 VII/71a

ANMELDETAG: 18. SEPTEMBER 1954

BEKANNTMACHUNG DER ANMELDUNG UND AUSGABE DER AUSLEGESCHRIFT: 23. JUNI 1960

Schuhoberteil

Anmelder:

Walter Geißler,
Unterföhring bei München, Bahnhofstr. 16

Walter Geißler, Unterföhring bei München,
ist als Erfinder genannt worden

1

Die Erfindung bezieht sich auf ein Schuhoberteil, welches aus einem Mischgewebe mit Textil- und Polyvinylchloridanteilen hergestellt und einer Warmbehandlung unterzogen ist.

Es ist bekannt, Mischgewebe, die aus Textil- und PVC-Fasern bestehen, zu verwenden, wobei man ein derartiges Mischgewebe durch eine Warmbehandlung und eventuell durch Beflocken und Schleifen so ausbilden kann, daß es eine samt- oder wildlederartige Beschaffenheit erhält.

Es ist auch bekannt, Schußfäden und Kettenfäden thermoplastisch miteinander zu verschmelzen, wobei es möglich ist, daß sowohl der Schuß- als auch der Kettenfaden oder nur einer der beiden Fäden thermoplastisch ist und durch Verschmelzung und anschließende Härtung mit dem anderen Faden ein Gewebe entsteht, welches hart ist.

Der Nachteil dieser bekannten Gewebe oder von Gewirken dieser Art besteht darin, daß bei der Herstellung des Gewebes oder Gewirkes der Anteil der PVC-haltigen Fäden an genau bestimmten Stellen, die anschließend gehärtet werden sollen, berücksichtigt werden muß und dadurch bei der Herstellung eine Verteuerung entsteht.

Aufgabe der Erfindung ist es, es zu gestatten, daß das Material für das Schuhoberteil in der Web- oder Wirkwarenfabrik hergestellt wird, ohne daß dabei auf die spätere Weiterverarbeitung dieses Materials zu Schuhschäften Rücksicht genommen zu werden braucht, z. B. darauf, welche Stellen des Gewebes oder Gewirkes besonders mit PVC-Fäden angereichert werden müssen.

Die Lösung der Aufgabe nach der Erfindung besteht darin, daß das Mischgewebe oder Mischgewirk aus an sich bekannten Mischfäden aus Textil- und Polyvinylchloridfasern hergestellt und an wählbaren Stellen in bekannter Weise durch Warmbehandlung versteift ist.

Nach diesem Merkmal findet die Mischung mit dem thermoplastischen Werkstoff nicht im Gewebe oder Gewirk z. B. durch Verwendung unterschiedlicher Schuß- oder Kettenfäden statt, sondern im Faden selbst. Wenn man direkt in der Faser mischt, dann braucht man nicht mehr Schuß- und Kettenfäden aus verschiedenen Werkstoffen zu wählen, man kann also einheitlich denselben Faden für Schuß- und Kette verwenden, so daß das ganze Gewebe oder Gewirk aus einem einheitlichen Werkstoff hergestellt wird, ohne daß dabei Rücksicht auf den Zuschnitt genommen werden muß. Erst wenn die Teile zugeschnitten sind und wenn feststeht, welche Teile z. B. für die Fersen- oder Zehenkappe verwendet werden, wird an örtlich begrenzten Stellen eine an sich bekannte Warmbehandlung durchgeführt, womit die entsprechende Härtung erreicht wird.

2

In weiterer Ausgestaltung der Erfindung ist an der dem Fuß zugekehrten Innenseite des Fersenteils ein aufgerauhtes Baumwollgewebe angeordnet, welches sich während der Warmbehandlung des Schuhoberteils mit diesem verbindet.

Nach diesem Merkmal wird also innen am Schuh ein aufgerauhtes, aus anderen Fasern bestehendes Gewebe oder Gewirk thermoplastisch befestigt. Statt des Baumwollgewebes oder -gewirkes kann auch ein Wollgewebe oder -gewirk verwandt werden, so daß der Schuh außen ein wildlederartiges Aussehen hat, wasserabweisend ist und eine gewisse Härte mit noch genügend großer Dehnbarkeit aufweist, während sich innen eine flauschartige, wärmende und an dem Fuß sich anschmiegende Baumwoll- oder Wollauskleidung befindet. Die thermoplastische Verformung wird zweckmäßig so weit getrieben, daß die Maschenbildung vom Weben oder Wirken verschmolzen ist.

Eine weitere mögliche Ausgestaltung besteht darin, daß der Anteil an Polyvinylchlorid in den Mischfäden des Gewebes oder Gewirkes so hoch ist, daß die der Abnutzung unterliegenden Ränder des gewebten oder gewirkten Schuhoberteils nach der Warmbehandlung eine genügende Härte besitzen und daß Ösen und bzw. oder Verzierungen aus Metall od. dgl. durch Erhitzen der betreffenden Stellen und Einschmelzen befestigt werden können.

Hinsichtlich der dekorativen Ausgestaltung ist es noch wichtig, daß in den Mischfäden des Gewebes bzw. Gewirkes ein so hoher Gehalt an Polyvinylchlorid vorhanden ist, daß vorzugsweise Ornamente durch erhitzte Prägestempel herstellbar sind.

Als Anwendungsgebiet der vorliegenden Erfindung sind alle Möglichkeiten zu bezeichnen, bei denen man Schuhoberteilen aus dekorativen Gründen das Aussehen von Wildleder geben will, den Preis aber erheblich senken möchte. Insbesondere ist das Schuh-

009 547/145

Skechers EX1013-p. 180
Skechers v Nike

oberteil auch für medizinische Zwecke geeignet, um bei anormal ausgebildeten Füßen die Möglichkeit zu haben, das elastisch nachgebende Schuhoberteil der Fußform anzupassen.

Patentansprüche:

1. Schuhoberteil, bestehend aus einem Mischgewebe mit Textil- und Polyvinylchloridanteilen, welches einer Warmbehandlung unterzogen ist, **dadurch gekennzeichnet,** daß das Mischgewebe aus an sich bekannten Mischfäden aus Textil- und Polyvinylchloridfasern hergestellt und an wählbaren Stellen in bekannter Weise durch Warmbehandlung versteift ist.

2. Schuhoberteil nach Anspruch 1, dadurch gekennzeichnet, daß an Stelle des Mischgewebes ein Mischgewirk verwendet ist.

3. Schuhoberteil nach den Ansprüchen 1 und 2, dadurch gekennzeichnet, daß seine Fersen- und Zehenteile durch Warmbehandlung versteift sind und daß an der dem Fuß zugekehrten Innenseite des Fersenteiles ein aufgerauhtes Woll- oder Baumwollgewebe oder ein Woll- oder Baumwollgewirk angeordnet ist, welches sich während der Warmbehandlung des Schuhoberteiles mit diesem verbunden hat.

4. Schuhoberteil nach den Ansprüchen 1 bis 3, dadurch gekennzeichnet, daß der Anteil an Polyvinylchlorid in den Mischfäden des Gewebes oder Gewirkes so hoch ist, daß die der Abnutzung unterliegenden Ränder des gewebten oder gewirkten Schuhoberteiles nach der Warmbehandlung eine genügende Härte besitzen und daß Ösen und bzw. oder Verzierungen aus Metall od. dgl. durch Erhitzen der betreffenden Stellen und Einschmelzen befestigt sind.

5. Schuhoberteil nach den Ansprüchen 1 bis 3, dadurch gekennzeichnet, daß in den Mischfäden des Gewebes oder Gewirkes ein so hoher Gehalt an Polyvinylchlorid vorhanden ist, daß vorzugsweise Ornamente durch erhitzte Prägestempel herstellbar sind.

In Betracht gezogene Druckschriften:
Deutsche Patentschriften Nr. 822 240, 475 648;
deutsches Gebrauchsmuster Nr. 1 676 274;
USA.-Patentschriften Nr. 2 639 250, 2 343 390.

© 009 547/145 6. 60

Skechers EX1013-p. 181
Skechers v Nike

PCT WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 7 :		(11) Internationale Veröffentlichungsnummer: **WO 00/32861**
D04B 1/16	**A1**	(43) Internationales Veröffentlichungsdatum: 8. Juni 2000 (08.06.00)

(21) **Internationales Aktenzeichen:** PCT/DE99/03852

(22) **Internationales Anmeldedatum:** 1. Dezember 1999 (01.12.99)

(30) **Prioritätsdaten:**
198 55 542.3 1. Dezember 1998 (01.12.98) DE

(71) **Anmelder** *(für alle Bestimmungsstaaten ausser US)*: RECARO GMBH & CO. [DE/DE]; Stuttgarter Strasse 73, D–73230 Kirchheim/Teck (DE).

(72) **Erfinder; und**
(75) **Erfinder/Anmelder** *(nur für US)*: ROELL, Friedrich [DE/DE]; Fünf Linden 61, D–88400 Biberach (DE).

(74) **Anwalt:** WAHL, Hendrik; Zipse & Habersack, Wotanstrasse 64, D–80639 München (DE).

(81) **Bestimmungsstaaten:** JP, US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht
Mit internationalem Recherchenbericht.
Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.

(54) **Title:** STABILIZATION OF A KNITTED ARTICLE USING A THERMAL MATERIAL

(54) **Bezeichnung:** STABILISIERUNG EINES GESTRICKS DURCH THERMOMATERIAL

(57) **Abstract**

The invention relates to a method for stabilizing a knitted article comprising mechanically sensitive weaves, such as, for example, terry cloth or loop pile weaves. To this end, either a melt fiber is knitted in or the knitted article is coated with a melt material and is subsequently subjected to a thermal treatment.

(57) **Zusammenfassung**

Die Erfindung betrifft ein Verfahren zur Stabilisierung eines Gestricks mit mechanisch empfindlichen Bindungen, wie z.B. Frottee– oder Polfadenbindungen. Hierbei wird entweder in das Gestrick ein Schmelzfaden eingestrickt oder das Gestrick mit einem Schmelzmaterial beschichtet und anschließend thermisch behandelt.

LEDIGLICH ZUR INFORMATION

Codes zur Identifizierung von PCT-Vertragsstaaten auf den Kopfbögen der Schriften, die internationale Anmeldungen gemäss dem PCT veröffentlichen.

AL	Albanien	**ES**	Spanien	**LS**	Lesotho	**SI**	Slowenien
AM	Armenien	**FI**	Finnland	**LT**	Litauen	**SK**	Slowakei
AT	Österreich	**FR**	Frankreich	**LU**	Luxemburg	**SN**	Senegal
AU	Australien	**GA**	Gabun	**LV**	Lettland	**SZ**	Swasiland
AZ	Aserbaidschan	**GB**	Vereinigtes Königreich	**MC**	Monaco	**TD**	Tschad
BA	Bosnien-Herzegowina	**GE**	Georgien	**MD**	Republik Moldau	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagaskar	**TJ**	Tadschikistan
BE	Belgien	**GN**	Guinea	**MK**	Die ehemalige jugoslawische Republik Mazedonien	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Griechenland			**TR**	Türkei
BG	Bulgarien	**HU**	Ungarn	**ML**	Mali	**TT**	Trinidad und Tobago
BJ	Benin	**IE**	Irland	**MN**	Mongolei	**UA**	Ukraine
BR	Brasilien	**IL**	Israel	**MR**	Mauretanien	**UG**	Uganda
BY	Belarus	**IS**	Island	**MW**	Malawi	**US**	Vereinigte Staaten von Amerika
CA	Kanada	**IT**	Italien	**MX**	Mexiko		
CF	Zentralafrikanische Republik	**JP**	Japan	**NE**	Niger	**UZ**	Usbekistan
CG	Kongo	**KE**	Kenia	**NL**	Niederlande	**VN**	Vietnam
CH	Schweiz	**KG**	Kirgisistan	**NO**	Norwegen	**YU**	Jugoslawien
CI	Côte d'Ivoire	**KP**	Demokratische Volksrepublik Korea	**NZ**	Neuseeland	**ZW**	Zimbabwe
CM	Kamerun			**PL**	Polen		
CN	China	**KR**	Republik Korea	**PT**	Portugal		
CU	Kuba	**KZ**	Kasachstan	**RO**	Rumänien		
CZ	Tschechische Republik	**LC**	St. Lucia	**RU**	Russische Föderation		
DE	Deutschland	**LI**	Liechtenstein	**SD**	Sudan		
DK	Dänemark	**LK**	Sri Lanka	**SE**	Schweden		
EE	Estland	**LR**	Liberia	**SG**	Singapur		

STABILISIERUNG EINES GESTRICKS DURCH THERMOMATERIAL

Die vorliegende Erfindung betrifft ein Verfahren zur Stabilisierung von Gestricken.

Es sind Gestrickstrukturen bekannt, die über oder weniger lockere Bindungen verfügen, die im Falle einer mechanischen Beanspruchung leicht aufgeweitet oder gar zerstört werden können. Derartige Bindungen sind z.B. Frottéebindungen oder Polfadenstrukturen.

Der vorliegenden Erfindung liegt die Aufgabe zugrunde, ein Verfahren zu schaffen, das eine Fixierung von lockeren Bindungsstrukturen in einem Gestrick ermöglicht. Diese Aufgabe wird durch ein Verfahren gemäß Anspruch 1 oder 2 gelöst. Vorteilhafte Weiterbildungen der Erfindung sind Gegenstand der Unteransprüche. Die Erfindung betrifft ebenfalls ein Gestrick, das unter Anwendung des Verfahrens nach Anspruch 1 oder 2 hergestellt ist.

Erfindungsgemäß erfolgt die Festlegung oder Fixierung der lockeren Bindungsstrukturen im Gestrick durch ein thermoplastisches Material, das unter Einwirkung von Hitze weich wird und/oder verklebt und/oder seine Struktur verändert.

Bei der thermischen Behandlung eines Schmelzmaterials verbindet sich bzw. verklebt das thermoplastische Material mit dem Gestrick in einem definierten Bereich, wodurch die lockeren Bindungsstrukturen sicher an dem Gestrick festgelegt werden.
Ein derartiges Material, das in Garnform erhältlich ist, ist z.B. Grilon® von EMS-Chemie AG. Diese Schmelzfäden sind mit einem Schmelzpunkt in einem weiten Temperaturbereich von 85 bis 160°C erhältlich.

Statt eines Schmelzfadens, der durch die Thermobehandlung zumindest partiell, in der Regel völlig aufschmilzt, kann auch ein Thermofaden verwendet werden, der unter Temperatureinwirkung seine Eigenschaften seine Struktur, wie z.B. Form, Länge etc. verändert. Bei der thermischen Behandlung des Thermomaterials, z.B. eines Thermoschrumpffadens verändert dieser seine Struktur, z.B. Länge. Eine Stabilisierung des Gestricks erfolgt hier durch die Längenabnahme des Fadens, die zu einer Verdichtung des Gestricks führt. Vorzugsweise sollte dabei der Durchmesser des Fadens beibehalten werden.

Es gibt drei Alternativen, das thermoplastische Material in das Gestrick einzubringen.

Eine erste Möglichkeit zur Einbringung des thermoplastischen Materials in das Gestrick besteht im Beschichten des fertigen Gestricks mit dem Material. Das thermoplastische Material wird vorzugsweise auf der Rückseite, d.h. nicht Sichtseite des Gestrickes aufgeklebt, aufgedampft oder anderweitig beschichtet. Nach der thermischen Behandlung verschmilzt bzw. verklebt das Material dann auf der Rückseite des Gestricks und fixiert dadurch eventuell in dem Gestrick vorhandene lockere Bindungsstrukturen.

In einer zweiten Alternative wird das thermoplastische Material als Faden in einer rückwärtigen Lage oder in eine Verbindungslage eines mehrlagigen Gestricks eingestrickt. Nachdem das Gestrick fertig gestrickt ist oder bereits im Laufe der Herstellung wird das Gestrick thermisch behandelt, wodurch der Faden aufschmilzt bzw. verklebt und auf diese Weise lockere Bindungsstrukturen in dem Gestrick festigt. Der thermoplastische Faden kann hierbei als Vermaschungsfaden fungieren. Da jedoch der Faden bei der thermischen Behandlung eventuell reißen kann, wird er vorzugsweise als Faden eingestrickt, der nicht an der

Maschenbildung des Gestricks beteiligt ist. Eine geeignete Einbringung wäre hier ein Kett- oder Schußfadeneintrag.

Eine dritte Möglichkeit der Einbringung des Thermo- oder Schmelzfadens ist das Aufplattieren des Fadens. Hier wird der Faden über einen speziellen Fadenführer neben dem Vermaschungsfaden derart eingebracht, daß er in Abständen an dem Gestrick festgelegt, z.B. partiell vermascht wird.

Als thermoplastischer Faden bzw. Thermofaden wird vorzugsweise aus Faden Typ Grilon® Multifil, K oder KE der EMS-Chemie AG verwendet.

Allgemein sollte der Schmelzpunkt des Fadens bzw. Aufweichpunkt des Fadens sollte vorzugsweise wenigstens 30° über Raumtemperatur liegen, um bei höheren Stricktemperaturen keine Ausfälle zu verursachen, andererseits sollte die Schmelztemperatur nicht zu hoch liegen, um durch die Thermobehandlung nicht die Qualität der anderen Fäden des Gestricks zu beeinträchtigen.

Durch die erfindungsgemäße Technologie lassen sich mechanisch sehr strapazierte Gestricke, wie z.B. Sitzbezüge in ihren Abriebeigenschaften beträchtlich verbessern.

Der Schmelzfaden kann auch dazu verwendet werden, nachträglich Funktions- oder Zierelemente mit dem Gestrick zu verbinden. Die Verbindung wird dann durch die thermische Aktivierung des definiert ein- bzw. aufgebrachten Schmelzfadens bewirkt.

Der Schmelzfaden kann auch als Polfaden zwischen zwei Lagen eingebracht und anschließend thermisch aktiviert werden, wodurch die beiden Lagen stabil miteinander verbunden werden.

In einer sehr vorteilhaften Weiterbildung der Erfindung wird der Schmelzfaden dazu verwendet, Anfangs- oder Endreihen, Lö-

cher Kanten oder andere hervortretende oder konturierte Gestrickelemente zu verkleben oder diese Stellen zu stabilisieren.

Durch die Verwendung von Thermofäden lassen sich auf einfache Weise Mehrlagen-Abstandsstrukturen herstellen.

Der Schmelz- oder Thermofaden kann auch von anderen Fadenmaterialien umsponnen oder umwunden sein, wodurch es möglich ist, auch schlecht strickbare Fadenmaterialien in das Gestrick einzubringen.

Zum Fixieren des Gestricks auf einem Träger kann auf der Rückseite des Gestricks ein Schmelz- oder Thermofaden aufgebracht, vorzugsweise definiert aufplattiert oder partiell vermascht werden. Durch Dampf- bzw. Hitzebehandlung kann dann das Gestrick, z.B. ein Sitzbezug einfach auf einen Träger wie z.B. Formschaum aufgebracht und fixiert werden.

PATENTANSPRÜCHE:

1. Verfahren zur Stabilisierung eines Gestricks mit mechanisch empfindlichen Bindungen, wie z.B. Frottee- oder Polfadenbindungen, bei dem in das Gestrick ein Schmelz- oder Thermofaden eingestrickt bzw. aufplattiert und das Gestrick anschließend thermisch behandelt wird.

2. Verfahren zur Stabilisierung eines Gestricks mit mechanisch empfindlichen Bindungen, wie z.B. Frottee- oder Polfadenbindungen, bei dem das Gestrick mit einem Schmelz- oder Thermomaterial beschichtet und anschließend thermisch behandelt wird.

3. Verfahren nach Anspruch 1,
dadurch gekennzeichnet,
daß der Schmelzfaden in dem Gestrick vermascht wird.

4. Verfahren nach Anspruch 1 oder 3,
dadurch gekennzeichnet,
daß der Schmelzfaden in das Gestrick als Kett- oder Schußfaden eingebracht wird.

5. Verfahren nach Anspruch 1, 3 oder 4,
dadurch gekennzeichnet,
daß der Schmelzfaden auf der Rückseite des Gestricks eingebunden wird.

6. Verfahren nach Anspruch 2,
dadurch gekennzeichnet,
daß dir Rückseite des Gestricks mit dem Schmelzmaterial beschichtet wird.

7. Verfahren gemäß Anspruch 1 und 2.

8. Verfahren nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß ein Schmelz- oder Thermofaden verwendet wird, der von anderen Fadenmaterialien umsponnen oder umwunden ist.

9. Verfahren nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß durch die thermische Aktivierung des definiert ein- bzw. aufgebrachten Schmelzfadens nachträglich Funktions- oder Zierelemente mit dem Gestrick verbunden werden.

10. Verfahren nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß der Schmelzfaden als Polfaden zwischen zwei Lagen eingebracht und anschließend thermisch aktiviert wird.

11. Verfahren nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß durch thermische Aktivierung des Schmelzfadens Anfangs- oder Endreihen, Löcher Kanten oder andere hervortretende oder konturierte Gestrickelemente verklebt oder stabilisiert werden.

12. Gestrick, hergestellt gemäß einem Verfahren nach einem der vorhergehenden Ansprüche.

13. Sitzbezug, hergestellt mit einem Gestrick nach Anspruch 12.

INTERNATIONAL SEARCH REPORT

Internatior pplication No
PCT/DE 99/03852

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 D04B1/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 D04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 728 860 A (HOECHST TREVIRA GMBH & CO KG) 28 August 1996 (1996-08-28) claims 1,4,41 ---	1,3,5, 12,13
X	EP 0 208 627 A (TEXTILES ET PLASTIQUES CHOMARAT) 14 January 1987 (1987-01-14) example 1 ---	2,6,12, 13
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 8, 30 August 1996 (1996-08-30) & JP 08 109553 A (TOHO SENI K.K.), 30 April 1996 (1996-04-30) abstract ---	1,4,12, 13
X	EP 0 305 094 A (LOMBARDI) 1 March 1989 (1989-03-01) claim 4; figures 3,4 ---	1,3,5,12
	-/--	

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
10 May 2000	18/05/2000

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Van Gelder, P

1

Form PCT/ISA/210 (second sheet) (July 1992)

Skechers EX1013-p. 190
Skechers v Nike

INTERNATIONAL SEARCH REPORT

Internatior pplication No
PCT/DE 99/03852

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
X	DE 196 36 208 A (RECARO GMBH & CO) 15 July 1971 (1971-07-15) column 6, line 16 - line 62; figures 3-5	1,9, 11-13
A	GB 1 465 361 A (DE WITTE) 23 February 1977 (1977-02-23)	
A	GB 538 865 A (BREW)	
A	PATENT ABSTRACTS OF JAPAN vol. 18, no. 201, 8 April 1994 (1994-04-08) & JP 06 002240 A (KAWASHIMA TEXTILE MFG LTD) abstract	

1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

Skechers EX1013-p. 191
Skechers v Nike

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internatior pplication No
PCT/DE 99/03852

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0728860 A	28-08-1996	DE 19506037 A	29-08-1996
		BR 9600792 A	23-12-1997
		CA 2170013 A	23-08-1996
		CZ 9600518 A	15-01-1997
		HU 9600381 A	28-04-1997
		JP 8260303 A	08-10-1996
		PL 312882 A	02-09-1996
		TR 960840 A	21-10-1996
		US 5618624 A	08-04-1997
EP 208627 A	14-01-1987	FR 2583339 A	19-12-1986
		AT 39857 T	15-01-1989
		DE 3661687 D	16-02-1989
JP 08109553 A	30-04-1996	NONE	
EP 0305094 A	01-03-1989	US 4794767 A	03-01-1989
		CA 1286514 A	23-07-1991
		DE 3879043 A	15-04-1993
DE 19636208 A	12-03-1998	WO 9810127 A	12-03-1998
		EP 0932715 A	04-08-1999
GB 1465361 A	23-02-1977	NONE	
GB 538865 A		NONE	
JP 06002240 A	11-01-1994	NONE	

INTERNATIONALER RECHERCHENBERICHT

Internatio[illegible] Aktenzeichen
PCT/DE 99/03852

A. KLASSIFIZIERUNG DES ANMELDUNGSGEGENSTANDES
IPK 7 D04B1/16

Nach der Internationalen Patentklassifikation (IPK) oder nach der nationalen Klassifikation und der IPK

B. RECHERCHIERTE GEBIETE

Recherchierter Mindestprüfstoff (Klassifikationssystem und Klassifikationssymbole)
IPK 7 D04B

Recherchierte aber nicht zum Mindestprüfstoff gehörende Veröffentlichungen, soweit diese unter die recherchierten Gebiete fallen

Während der internationalen Recherche konsultierte elektronische Datenbank (Name der Datenbank und evtl. verwendete Suchbegriffe)

C. ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie°	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
X	EP 0 728 860 A (HOECHST TREVIRA GMBH & CO KG) 28. August 1996 (1996-08-28) Ansprüche 1,4,41 ---	1,3,5, 12,13
X	EP 0 208 627 A (TEXTILES ET PLASTIQUES CHOMARAT) 14. Januar 1987 (1987-01-14) Beispiel 1 ---	2,6,12, 13
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 8, 30. August 1996 (1996-08-30) & JP 08 109553 A (TOHO SENI K.K.), 30. April 1996 (1996-04-30) Zusammenfassung ---	1,4,12, 13
X	EP 0 305 094 A (LOMBARDI) 1. März 1989 (1989-03-01) Anspruch 4; Abbildungen 3,4 ---	1,3,5,12
	-/--	

[X] Weitere Veröffentlichungen sind der Fortsetzung von Feld C zu entnehmen

[X] Siehe Anhang Patentfamilie

° Besondere Kategorien von angegebenen Veröffentlichungen :
"A" Veröffentlichung, die den allgemeinen Stand der Technik definiert, aber nicht als besonders bedeutsam anzusehen ist
"E" älteres Dokument, das jedoch erst am oder nach dem internationalen Anmeldedatum veröffentlicht worden ist
"L" Veröffentlichung, die geeignet ist, einen Prioritätsanspruch zweifelhaft erscheinen zu lassen, oder durch die das Veröffentlichungsdatum einer anderen im Recherchenbericht genannten Veröffentlichung belegt werden soll oder die aus einem anderen besonderen Grund angegeben ist (wie ausgeführt)
"O" Veröffentlichung, die sich auf eine mündliche Offenbarung, eine Benutzung, eine Ausstellung oder andere Maßnahmen bezieht
"P" Veröffentlichung, die vor dem internationalen Anmeldedatum, aber nach dem beanspruchten Prioritätsdatum veröffentlicht worden ist
"T" Spätere Veröffentlichung, die nach dem internationalen Anmeldedatum oder dem Prioritätsdatum veröffentlicht worden ist und mit der Anmeldung nicht kollidiert, sondern nur zum Verständnis des der Erfindung zugrundeliegenden Prinzips oder der ihr zugrundeliegenden Theorie angegeben ist
"X" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann allein aufgrund dieser Veröffentlichung nicht als neu oder auf erfinderischer Tätigkeit beruhend betrachtet werden
"Y" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann nicht als auf erfinderischer Tätigkeit beruhend betrachtet werden, wenn die Veröffentlichung mit einer oder mehreren anderen Veröffentlichungen dieser Kategorie in Verbindung gebracht wird und diese Verbindung für einen Fachmann naheliegend ist
"&" Veröffentlichung, die Mitglied derselben Patentfamilie ist

Datum des Abschlusses der internationalen Recherche	Absendedatum des internationalen Recherchenberichts
10. Mai 2000	18/05/2000

Name und Postanschrift der Internationalen Recherchenbehörde	Bevollmächtigter Bediensteter
Europäisches Patentamt, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Van Gelder, P

1

Formblatt PCT/ISA/210 (Blatt 2) (Juli 1992)

Skechers EX1013-p. 193
Skechers v Nike

INTERNATIONALER RECHERCHENBERICHT

Internatio : Aktenzeichen
PCT/DE 99/03852

C.(Fortsetzung) ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie°	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
X	DE 196 36 208 A (RECARO GMBH & CO) 15. Juli 1971 (1971-07-15) Spalte 6, Zeile 16 - Zeile 62; Abbildungen 3-5	1,9, 11-13
A	GB 1 465 361 A (DE WITTE) 23. Februar 1977 (1977-02-23)	
A	GB 538 865 A (BREW)	
A	PATENT ABSTRACTS OF JAPAN vol. 18, no. 201, 8. April 1994 (1994-04-08) & JP 06 002240 A (KAWASHIMA TEXTILE MFG LTD) Zusammenfassung	

1

Skechers EX1013-p. 194
Skechers v Nike

INTERNATIONALER RECHERCHENBERICHT

Angaben zu Veröffentlichungen, die zur selben Patentfamilie gehören

Internationales Aktenzeichen
PCT/DE 99/03852

Im Recherchenbericht angeführtes Patentdokument	Datum der Veröffentlichung	Mitglied(er) der Patentfamilie	Datum der Veröffentlichung
EP 0728860 A	28-08-1996	DE 19506037 A	29-08-1996
		BR 9600792 A	23-12-1997
		CA 2170013 A	23-08-1996
		CZ 9600518 A	15-01-1997
		HU 9600381 A	28-04-1997
		JP 8260303 A	08-10-1996
		PL 312882 A	02-09-1996
		TR 960840 A	21-10-1996
		US 5618624 A	08-04-1997
EP 208627 A	14-01-1987	FR 2583339 A	19-12-1986
		AT 39857 T	15-01-1989
		DE 3661687 D	16-02-1989
JP 08109553 A	30-04-1996	KEINE	
EP 0305094 A	01-03-1989	US 4794767 A	03-01-1989
		CA 1286514 A	23-07-1991
		DE 3879043 A	15-04-1993
DE 19636208 A	12-03-1998	WO 9810127 A	12-03-1998
		EP 0932715 A	04-08-1999
GB 1465361 A	23-02-1977	KEINE	
GB 538865 A		KEINE	
JP 06002240 A	11-01-1994	KEINE	

RESERVE COPY.

3rd. Edition

PATENT SPECIFICATION.

Application Date: Nov. 18, 1939. *No. 30312/39.* **538,865**

" " *April 26, 1940.* *No. 7497/40.*

One Complete Specification Left: Dec. 12, 1940.

(Under Section 16 of the Patents and Designs Acts, 1907 to 1939.)

Specification Accepted: Aug. 20, 1941.

PROVISIONAL SPECIFICATION
No. 30312 A.D. 1939.

Improvements relating to Knitted Fabrics and Manufactured Knitted Articles.

I, HAROLD EDMUND BREW, B.Sc., A.T.I., Assoc. M.C.T., a British subject, of Hawthorn Cottage, Glazebrook Lane, Glazebrook, Manchester, do hereby declare the nature of this invention to be as follows :—

This invention relates to knitted fabrics, and to manufactured articles made by knitting, such for example as ladies stockings.

One of the disadvantages of certain types of knitted wear at present known, is the susceptibility to "laddering", that is, to a broken stitch in one course releasing the engaged stitch in the next course and allowing the dropping of the successively-engaged stitches in successive courses. In the case of a stocking for instance, a stitch broken at the knee may cause a " ladder " along the length of the stocking as far as the instep.

Again, knitted fabrics are usually very susceptible to lateral distortion, for which reason they are not suitable for the manufacture of processed goods since they would be distorted in the processing machinery; and, in addition, many knitted fabrics if cut into narrow-width strips or into other small-dimensioned pieces are apt to curl and/or fray.

The object of the present invention is to provide knitted goods of an improved character in which, (a) if the stitching is of a ladderable type, laddering is prevented, or at the least if it occurs is confined to short lengths; (b) the fabrics may be reinforced against lateral distortion, and (c) the fabrics may be prevented from fraying and/or curling.

According to the invention, the knitted goods are made from yarns some of which or some parts of which are capable of being rendered temporarily adhesive, and such state of adhesion is brought about after knitting has been accomplished. The result aimed at is that where, in the finished article, a portion rendered adhesive is in contact with another part union will take place, thus uniting contiguous stitches at random. According to the particular goods being made, that is according to whether non-laddering or reinforcement is the principal aim, the number and spacing of the unions will be varied. For instance, in the case of a stocking the unions must be such as not unduly to interfere with the elasticity and tension of the article.

The invention contemplates the use of a double yarn, of which one strand only is capable of being rendered adhesive, and whether the two yarns are knitted simultaneously from separate supplies, or whether they are twisted together or otherwise combined, as a composite yarn. Further, the invention includes the use of thermo-plastic yarn components, to be rendered adhesive by the application of heat as well as the use of substances which, if treated with solvents or liquid reagents, become adhesive. As further alternatives gaseous or vapour reagents may be employed, and either with or without super-atmospheric pressure.

As applied to double or composite yarns, the invention may be characterised by the use of " primary " or foundation yarns of silk or viscose rayon, or other natural or synthetic fibre, and " binding " yarns comprising filaments of acetate or ether rayon, or of hydrolised acetate, or of acetylated yarn, or of other filaments of a yarn having different chemical properties from the primary yarn. The difference of chemical properties is to be such that a treatment of the selected binding yarn, to effect the desired union, will be of a kind not calculated to affect the primary yarn.

In other cases the binding yarn of a composite yarn may be treated at intermittent places to modify its chemical and/or physical properties in such a way as to render the yarn adhesive when treated say by heat, or with a solvent, or the like.

In examples of the invention when a viscose-acetate combination yarn, or a

[*Price 2/-*]

Price 4s 6d

Price 25p

Skechers EX1013-p. 196
Skechers v Nike

real-silk-acetate combination yarn is employed, the state of adhesion may be introduced by the application of such solvents as either glacial acetic acid or acetone, these two examples being named as representative of a wide range of alternatives. The proportions of solvent and the periods of immersion to give optimum results can be found by simple trial and error. In other examples, instead of a solvent being employed the yarn could be hydrolised by the application of caustic soda to the acetate constituents, that is, for example, in the case of a viscose-acetate combination. Again, in other examples, instead of solvents or hydrolising agents being used, the acetate constituents may be fused by the application of heat with or without pressure.

In the use of solvents or other re-agents, in particular liquid re-agents, a too-rapid treatment of the binding yarn may result, and this would cause excessive binding of the primary yarn, or even dispersion of the binding yarn. This can be prevented by the treatment of the binding yarn with a resist at short intervals, which intervals may be regularly or irregularly spaced.

In other embodiments of the invention when a composite yarn is used in which the two constituents are of similar material, the material will be such as to allow of the adhesion being produced, but one or both the yarns will be treated with a resist, in parts, so that the adhesion will be brought about only in those places not treated with the resist.

In the manufacture of such articles as stockings, the binding yarn may, if desired, be employed for a certain proportion only of the courses, and in such case it may be necessary to vary the effective denier or count of the primary yarn in the intervening courses, so that there will be no noticeable " ringing " or other marking of the finished article.

The invention is capable of a number of modifications, but in all cases the aim is to use yarns which, when the knitted article is subsequently treated, will be rendered adhesive in certain points, with the result that a union will accrue where those points are points of contact in the stitching.

Dated this 17th day of November, 1939.

For the Applicant,
WILSON, GUNN & ELLIS,
Chartered Patent Agents,
54/56, Market Street, Manchester, 1.

PROVISIONAL SPECIFICATION.
No. 7497 A.D. 1940.

Improvements relating to Knitted Fabrics and Manufactured Knitted Articles.

I, HAROLD EDMUND BREW, B.Sc., A.T.I., Assoc. M.C.T., a British subject, of Hawthorn Cottage, Glazebrook Lane, Glazebrook, Manchester, do hereby declare the nature of this invention to be as follows :—

This invention relates to knitted fabrics and to manufactured articles made by knitting, such for example as ladies stockings, and consists of improvements in or modifications of the invention forming the subject of my earlier Application for Patent No. 30312/39 filed on the 18th November, 1939 (Serial No. 538,865).

According to that invention, knitted goods were made from yarns, some of which, or some parts of which, were capable of being rendered temporarily adhesive, such state of adhesion being brought about after the knitting had been accomplished, and with a view to preventing or resisting laddering of the fabric. Alternative modes of operation are described in my said earlier Application, and the present invention consists of improved means for bringing about the adhesion between the yarns.

The present invention consists mainly in the use of improved or alternative solvents or swelling agents, which will act on the auxiliary yarn of say cellulose derivative (in particular cellulose acetate) to affect the adhesion, but which will have no adverse affect on the basic yarn (for example a viscose yarn). Other derivatives than cellulose acetate are cellulose nitrate, and cellulose ethers, e.g., benzyl cellulose and ethyl cellulose, and also mixed cellulose esters, cellulose aceto propionate. Further, synthetic threads of other materials may be employed as the auxiliary yarn (and even as the main yarn), for example, the polyamide and vinyl resins, the solvents or swelling agents being suitably chosen.

According to the invention, solvents or swelling agents are selected from (a) the alkyl and aryl esters, (for example, ethyl acetate, ethyl lactate, benzyl benzoate); from (b) the halogen derivatives of the lower members of the aliphatic and aromatic hydrocarbons (for example,

Skechers EX1013-p. 197
Skechers v Nike

chloroform, methylene chloride, benzylidene chloride); or from (c) the alkyl ketones, (for example, acetone); from (d) the group comprising ethyl aceto-acetate, diethyl carbonate, benzyl alcohol, diacetone alcohol, the polyglycol and glycol acetates and ethers (for example, ethylene glycol di-acetate, ethylene glycol mono-ethyl ether), cyclo-hexanone and methyl cyclohexanone, cyclohexanol acetate, methyl cyclohexanol acetate, the chlorohydrins (for example, mono- di- or epichlorohydrin) di-chlor ethyl ether, tetralin, eugenol, nitrobenzene, and nitromethane; or (e) from suitable mixtures of any of these.

According to another feature of the invention for use in cases where the pure solvent would be too strong and disperse or unduly weaken the yarn, a diluent is used, for example, one or more selected from the group comprising the aliphatic alcohols, ethers and hydrocarbons (for example, ethyl alcohol, ethyl ether, pentane or petroleum) amylene, petroleum ether, and the aromatic hydrocarbons (for example benzene or toluene), these diluents being selected so as not to destroy the required adhesion in the yarn.

The diluent is preferably one having a boiling point appreciably lower, and a rate of evaporation higher than the solvent or swelling agent used for treatment of the acetate.

Some of the solvents or swelling agents referred to above are not solvent at normal temperatures, but may be rendered solvent by raising the temperature. For example, ethylene-glycol mono-ethyl ether produces no adhesion in the cellulose acetate at normal temperatures, but when raised say to 60° C. will produce an adhesion.

According to a further feature of the invention, in cases where the cellulose derivative yarn is likely to shrink or become brittle under the influence of the solvent, suitable plasticisers are used to counteract this tendency. These plasticisers should have a high boiling point, should be stable against normal conditions, should be insoluble in water, and unaffected by hot detergents. Preferably also, the plasticisers should be such as to have a solvent action on the auxiliary yarn, and for most uses should be colourless and odourless. Examples, suitable principally with cellulose acetate yarns, are the alkyl phthalates (for example diethyl phthalate), alkyl tartrates (for example, dibutyl tartrate), alkyl citrates (for example tri-amyl citrate) and alkyl salicylates (for example ethyl salicylate), benzyl alcohol, benzyl benzoate, butylene glycol diacetate, cresyl glyceryl diacetate, glyceryl tri-crotonate, and tri-cresyl phosphate. In some instances, mixtures of certain of these substances may be employed.

After the treatment of the fabric, the plasticisers may be removed from the main yarn (but not from the auxiliary yarn) by utilising the preferential absorption of the cellulose derivative for the plasticiser and by using a relatively poor solvent for the plasticiser. For example, with an alkyl phthalate as a plasticiser, petroleum ether or benzene has been found useful as a solvent.

For the best results, and to maintain the elasticity of the fabric, it is important that the auxiliary yarn should be twisted with the main yarn, otherwise there may be no points of contact between the auxiliary yarn and itself, and excessive swelling would therefore have to be engendered to obtain local adhesion. Further, the number of contacts between the auxiliary yarn and itself, may be controlled by varying the degree of twist in the composite yarn.

The aim of the solvent treatment is to produce adhesion of the cellulose derivative or other auxiliary yarn where it meets itself only and not with the principal yarn.

In an example of the invention, a composite twisted yarn comprises a main yarn of viscose or real silk of 50 denier, and an auxiliary yarn of cellulose acetate of 10 denier, or finer. These components are twisted so as to have from two to six turns per inch. The knitted fabric is immersed in a bath containing :

ethyl acetate 20 gms. to 25 gms.,
ethyl ether 77.5 gms. to 72.5 gms. (Sp.Gr. .720),
di-ethyl phthalate 2.5 gms.,

for 12 hours, at room temperature, and is then removed and the solvents allowed to evaporate.

It is to be understood that the time periods, the temperatures, and the rate and conditions of evaporation are variable.

In another example, the following bath is made up :—

ethyl acetate 25 gms. to 30 gms.,
pentane 74 gms. to 69 gms.,
di-ethyl phthalate 1 gm.

and the fabric treated as before.

In some cases the immersion of the fabric may be carried out under superatmospheric pressure.

The conditions of evaporation of the solvent and diluent are likely to have considerable effect on the nature of the auxiliary yarn. The evaporation should preferably take place at a temperature above normal room temperature, and in an atmosphere containing the solvent in vapour form.

Skechers EX1013-p. 198
Skechers v Nike

The twisting together of the two components of the yarn may be effected in various ways, and either in the knitting machine, or as a preliminary operation. The two components may each have a twist, or one may be twisted around the other.

Dated this 25th day of April, 1940.

For the Applicant,
WILSON, GUNN & ELLIS,
Chartered Patent Agents,
54/56, Market Street, Manchester, 1.

COMPLETE SPECIFICATION.

Improvements relating to Knitted Fabrics and Manufactured Knitted Articles.

I, HAROLD EDMUND BREW, B.Sc., A.T.I., Assoc. M.C.T., a British subject, of Hawthorn Cottage, Glazebrook Lane, Glazebrook, Manchester, do hereby declare the nature of this invention and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement :—

This invention refers to machine-made knitted goods, including both knitted piece goods and shaped knitted articles such as articles for wear and parts thereof, for example ladies' stockings, under-wear and the like. The invention is concerned only with goods of the type (hereinafter referred to as " the said type " or " the type refered to ") in which the knitting is done entirely from continuous filaments, whether natural (e.g. silk) or artificial (e.g. acetate rayon or viscose rayon).

The terms " filament " and " filamentary " are used herein to denote an elongated knittable element of continuous longitudinal structure, as distinct from an element which is of a longitudinally-built-up structure, such as a spun yarn. The invention is not concerned with spun yarns made by associating short fibres together. The continuous filamentary elements with which the invention is concerned are characterised by substantial uniformity of cross-section, and by smoothness of surface. In the art " filament " denotes a single element the product of only one extrusion orifice. As these filaments are too fine for use alone, it is usual to twist a number of them together as a unit. In this specification, the term filament includes and usually denotes such a unitary twisted assembly.

One of the disadvantages of these filamentary knitted goods, which are fine-gauge goods, is that, with certain types of stitch there is, owing to the smooth surfaces of the filaments, a marked susceptibility to " laddering "; that is a susceptibility to a broken stitch in one course, releasing the engaged stitch of the next course, which in turn releases the engaged stitch of the third course, and so on for successively-engaged stitches in successive courses. In the case of a lady's stocking, for instance, a loop stitch broken at the knee may cause a " ladder " along the length of the stocking, as far as the instep. When stockings are being worn they are subject to a certain amount of lateral tension tending to straighten out the loop stitches, which tension helps in the disengagement of the successive stitches once a broken stitch occurs.

The use of the fine-gauge knitted goods to which this invention relates, involves two main desiderata, one being the presence of a high degree of resistance to laddering (when the stitch is of a laddering type) to prevent easy damage to the goods; and the other being the presence of a sufficient degree of elasticity in the goods to ensure (say in the case of a garment) a good fit without permanent distortion. Broadly, the means for satisfying these desiderata are, to some extent, opposed to each other, in that any attempt to anchor the stitches of a knitted fabric together to resist laddering, tends, by preventing relative movement at the points of anchorage, to lessen the elasticity of the fabric. The commercial failure of many of the proposals previously put forward for preventing laddering has been due to their undue interference with the elasticity of the goods.

The object of the present invention is to provide knitted goods of the type referred to which are of an improved character in that, if the stitching is of a ladderable type, laddering is prevented, or at the most is confined to a very small number of courses, without the goods having been rendered too inelastic for their normal purposes.

According to the invention, knitted goods of the type referred to are made from a composite yarn composed of at least one inert foundation filament and at least one potentially-adhesive binding filament, the filaments being twisted together with a low degree of twist, and, after knitting, the goods are subjected to treatment which will render the binding filament or filaments tacky or adhesive

Skechers EX1013-p. 199
Skechers v Nike

and will cause mutually-contacting adhesive parts to unite. The degree of twist in the composite yarn is such that there are sufficient contacts of adhesive parts with each other to prevent laddering, and such that there is sufficient relative freedom between the component filaments of the yarn to maintain the desired elasticity, and the nature of the treatment is such that, whilst two mutually-contacting adhesive parts will unite, one adhesive part will not as a rule unite with an inert filament. The invention embraces both the method of manufacture and the manufactured goods, and also the special yarns hereinafter described.

By the term " binding filament " is meant a filament composed of, or carrying on its surface (continuously or intermittently) a substance which may be rendered tacky or adhesive by means such as heat and/or gelatinising agents, or by such chemical treatment as may be applied without damaging or seriously weakening the filament; and, by the term " inert foundation filament " is meant a filament which will not be rendered tacky or adhesive by the treatment which renders the binding filament tacky or adhesive. The expression " potentially-adhesive " as applied to the binding filament means " capable of being rendered adhesive."

The binding filament or filaments with which the inert foundation filament is twisted may be potentially adhesive throughout its or their whole length, or may be potentially adhesive at some parts only. Filaments made from cellulose esters or ethers are potentially adhesive throughout their whole length, in that the whole surface may be rendered adhesive by the action of solvents or gelatinising agents. Similarly, the whole surface of filaments coated with some natural or synthetic resins, or resin-forming substances, may be rendered adhesive by heat. A filament potentially adhesive at some parts only of its surface may be obtained by covering an inert filament at some parts only of its surface with a substance capable of being rendered adhesive, or by covering with a resist at some parts only the surface of a filament potentially adhesive throughout its length.

The present invention seeks as far as possible to avoid adhesion between different parts of any one stitch loop, and between adjacent stitches in the same course. By the process of the invention adhesion normally takes place only between the binding filament of a stitch in one course and the binding filament of an inter-engaging stitch of the next course, and since the points of contact between any two such stitches in different courses are always at the base of a loop, the adhesions between the binding filament and itself will be at the base of the loop. Moreover, as the adhesions occur between the binding filament and itself, the stitches are, despite their connection, capable of some relative movement or deformation because the foundation filaments may pull away from the binding filaments to a slight extent when under stress.

The control of the position of the unions throughout the stitches, and of the relative freedom of the component filaments, is determined by regulating the degree of twist between the components of the composite yarn, and also, if the binding filament has interrupted potentially-adhesive surface parts, by regulating the spacing of those parts from each other. These factors will be variable according to the size of the stitches to be made and to the degree of elasticity required in the ultimate article. In any one stitch, the chances of that stitch being united by adhesion to another will depend on the position of the potentially-adhesive part along the yarn (determining whether or not it is at the base of the loop), on the position of such part around the yarn (determining whether or not it contacts with the inter-engaging stitch even if at the base of a loop), and on the corresponding positions in the inter-engaging stitch (determining whether or not two potentially-adhesive parts come into contact). The number of potential unions between the crossing yarns in the knitted fabric will increase as the number of twists per unit length of yarn is increased, such number of unions being related to the square of the number of turns. The number of potential unions is also dependent upon the size of the knitted stitch, which is determined by the gauge or fineness of the fabric. Given the standard of elasticity required in the goods to be made, and the size of stitch required, the determination of the correct amount of twist between the components of the yarn may be made by trial and error, but it will be found usually to be between two and ten turns per inch.

Theoretically, if the potentially-adhesive parts are regularly spaced in the yarn, because of the twist being perfectly regular, and the stitches are of uniform size, the unions will occur in a regular series. In practice, however, it is very difficult, if not impossible, to ensure perfect regularity in the treatment or preparation of the yarn, so that the resulting unions will be somewhat irregu-

Skechers EX1013-p. 200
Skechers v Nike

larly spaced in the fabric, although of the desired frequency. In most cases the yarn will be so prepared with respect to the size of the stitches to be made, that on the average not more than one contact of adhesive-forming parts will occur in any one loop.

The means selected to bring about the tacky or adhesive condition will depend to some extent on the nature of the potentially-adhesive substance in the yarn. In some cases, when that substance is one which on ageing will pass through an adhesive phase, a mere ageing will suffice, either at atmospheric or superatmospheric pressure. In other cases, when that substance is a thermo-plastic one, the application of heat will be required, sometimes accompanied by pressure, either a mechanical pressure (e.g. ironing) or a gaseous pressure. Again, it may be necessary to apply to the knitted goods fluids which produce an adhesive state in the binding filament by acting as gelatinising agents for the adhesive-forming substances such fluids being either in gaseous or liquid form, or themselves carried in an inert medium, any surplus being removed before final drying; or combinations of these several steps may be found advantageous. In cases where the potentially-adhesive binding filament consists of or carries on its surface partly-condensed resin-forming materials as the adhesive-forming substance the adhesion between the stitches may be effected in and by a final condensation reaction carried out in the knitted goods, for example in a closed chamber under heat and pressure. Given the substances of which the various components of the yarn are made, the selection of the best means, and the choice of fluid agents (if used) will be made by trial and error until the adhesion can be restricted almost entirely to the binding filament and itself. The examples given below will be a guide to the right selection.

The heat treatment of the goods to bring about adhesion, when that form of treatment is selected, may be carried out in hot water when the reagents or some of them previously applied to the yarns are not readily water-soluble, or in other suitable liquid media, the temperature being maintained at a sufficiently high degree to produce the required tacky or adhesive state. In this connection, instead of the goods being subjected to a separate treatment for producing the adhesion, the adhesion may be effected during the usual dyeing and finishing processes either by the mere heat treatment in those processes effecting gelatinisation, or by one of the reagents for gelatinisation being carried in one of the finishing baths. The usual care will be taken to see that the temperatures are not raised to a degree which would be injurious to any of the substances under treatment.

In the application of the invention to the finer gauges of silk stockings, composed of 2, 3, or 4 thread thrown silk yarns, it may not be desirable to use a fine cellulose acetate or other thermo-plastic filament as a binding filament and in such cases the necessary adhesive-forming substance would be deposited intermittently or continuously on one or more of the silk threads e.g. by printing, spraying or other means.

In a convenient method of carrying out the invention, the composite yarn comprises as the inert foundation filament, viscose rayon; and as the potentially-adhesive binding filament, acetate rayon; the foundation filament being of larger diameter than the binding filament. The two components are twisted together slightly, so as to give, for example, from two to ten turns per inch. The twisting together of the components of the composite yarn will preferably be done before the yarn is brought to the knitting machine, although it is not inconceivable that knitting machines may be adapted to twist the filaments together immediately prior to knitting. In any case, it is necessary to insert only sufficient twist in the composite yarn to provide enough binding places to give the desired degree of anti-laddering effect and to maintain a desirable elasticity. More twist than this, by introducing too many bindings, and by associating the binding filament too tightly with the foundation filament, will be liable to reduce the elasticity of the fabric unduly.

It is probable that with some methods of treatment a slight shrinkage will occur in the length of the binding filament, and in order to counter-act this and thus preserve the elasticity of the fabric, it may be desirable to have a greater length of the binding filament than of the inert foundation filament per unit length of composite yarn. This may be accomplished by having different tensions for the different components during folding and twisting together, and/or by twisting (or untwisting) the components themselves (or one of them) prior to or during twisting together, the separate twisting or untwisting of the components being to the same or to different degrees, and in the same or in different directions. It would be possible, for instance, so to prepare the components that in twisting them together the inert foundation filament would be

Skechers EX1013-p. 201
Skechers v Nike

still further twisted, whilst the binding filament would be untwisted, thus providing a greater length of the shrinkable component than of the other component, in any given length of the composite yarn, but not sufficiently to interfere with the knitting properties of the yarn.

The knitted articles of the invention may be regarded as formed of two fabrics, the respective threads of which are intertwined, and one only of which is keyed to itself at points of crossing. If the degree of twist, the separate tensions during the folding of the inert and binding filaments, and the tension of the composite yarn during knitting are adjusted to the optimum, a certain amount of relative movement is possible between the two fabrics, and if the finishing treatment is appropriately selected such relative movement is maintained, thus preserving to a large extent the elasticity of the material as a whole. This effect may be enhanced by giving to the compound fabric a finishing treatment with a suitable lubricant. The binding filament being mainly for the introduction of binding places, may be as fine as conveniently possible consistent with its having sufficient strength for its purpose.

In a fabric made according to this invention, the unions at the crossed adhesive parts are within the thickness of the fabric, between the crossed yarns.

When the adhesive or tacky state is brought about by the application of a gelatinising agent or solvent, it is necessary to control the action so as to avoid any adverse effect on the physical properties of the yarn, and for this purpose a diluent may be used. Such diluent may be one that is appreciably more volatile than the gelatinising agent. Where the degree of gelatinisation is controlled by the application of the gelatinising agent and diluent for a short period of time and by the rapid removal (say by evaporation, or washing off, or further dilution) of the diluent, the volatility of this latter need not be so high. When a more volatile diluent is used the gelatinisation and adhesion occur during evaporation of the agent and diluent.

In cases where the binding filament is likely to shrink and become brittle under the influence of a volatile gelatinising agent, and where this tendency cannot be conveniently or sufficiently counteracted by regulating tensions and twists as above mentioned, a less volatile solvent may be used as the gelatinising agent or as an addition to the volatile gelatinising agent, which less volatile solvent will, when it remains in the binding filament, also serve as a plasticiser to counteract such tendency to brittleness. This less volatile solvent or plasticiser if not subsequently removed, should be stable under normal conditions, insoluble in water, and unaffected by hot detergents, and should be non-toxic and non-irritant.

Preferably also, the plasticiser should be colourless and odourless. The terms " volatile " and " less volatile " as used herein refer to volatility at normal room temperatures in open atmosphere, the latter denoting " substantially non-volatile under normal conditions ".

The binding filament may be formed from cellulose esters, such as cellulose acetate or cellulose nitrate; the mixed cellulose esters (such as cellulose aceto propionate); or from cellulose ethers (such as benzyl cellulose or ethyl cellulose). Further, synthetic filaments of other materials may be employed as the binding filament, for example, the polyamide and vinyl resins; or a filament with a smooth sheath or coating or impregnation of cellulose acetate or other cellulose derivatives, or other potentially-adhesive substance on a core of non-reactable substance such as viscose. Natural and synthetic rubber substances may also be used as the adhesive-forming substance if in filamentary form or carried by a non-adhesive filament. In all these cases, the selected gelatinising agent will be suitable to the substance used in or for the auxiliary or binding filament.

Examples of agents for effecting gelatinisation and comprising solvents of high and low volatility, selection from which will be determined by the nature of the adhesive-forming substance to be gelatinised, are :—

(a) Some of the aliphatic and aromatic esters, including some of those derived from the simple esters by the inclusion of substituent groups in the molecule (such as ethyl acetate, ethyl aceto-acetate, di-ethyl carbonate, benzyl benzoate, glyceryl tri-acetate, and di-methyl glycol phthalates). Dimethyl phthalate has been found particularly useful for cellulose acetate;

(b) Some of the glycols and their substituted derivatives (such as ethylene glycol mono ethyl ether and butylene glycol di-acetate);

(c) Some of the halogen derivatives of the aliphatic and aromatic hydrocarbons (such as methylene chloride and chloroform);

(d) Some of the alkyl and aryl ketones (such as methyl ethyl ketone and diacetone alcohol);

(e) Some of the fatty acids (such as acetic acid and propionic acid);

(f) The aryl sulphonamides (such as *p*-

toluene sulphonamide); and

(g) Any suitable mixture of any of the above.

Agents which have a strong solvent or dispersing action on the material of the binding filament are not suitable for use alone as gelatinisers. The aim of the treatment is to produce in the binding filament an adhesive state of such degree that union occurs only between parts of the binding filament in contact with each other, and not between the binding filament and the inert foundation filament. Thus, acetone and acetic acid are not suitable alone as gelatinisers for cellulose esters. Where cellulose acetate forms the potentially-adhesive substance, dimethyl phthalate gives the range of adhesiveness required to achieve the object of the invention.

Some of the gelatinising agents mentioned are not effective when used alone, but have a gelatinising effect when mixed with another non-solvent. Such mixtures have advantages in that the solvent or gelatinising action is more gentle and is more easily controlled. An example of such a mixture is ethyl alcohol with diethyl carbonate or butyl formate. Again, some of the agents specified are non-solvent at ordinary temperatures but become effective on the temperature being raised. For example:—ethylene glycol monoethyl ether produces no adhesion in cellulose acetate at normal temperatures but will do so at say 60° C. Other similar examples are *n*-propyl and iso-propyl alcohols and acetates and methyl amyl ketone.

When the adhesive-forming substance is a cellulose acetate, the gelatinising agent selected will depend to some extent on the acetyl content of the acetate used, as some of the solvents above-named are more effective with some types of acetate than with others.

Examples of diluents suitable for use with gelatinising agents which otherwise would be too strong and injure the yarn are, the aliphatic alcohols and ethers (such as ethyl alcohol and ethyl ether), and the aliphatic and aromatic hydrocarbons and certain of their chlorinated derivatives (such as pentane, benzene and carbon-tetra-chloride).

If the gelatinising agent consists of or includes a substance not readily volatilised at moderate temperatures, such substance may be removed from the inert foundation filament, but not completely from the binding filament, by washing off. In this case, selective action is obtained as a result of preferential absorption by the binding filament. The selective action may be increased by using in the washing process a relatively poor solvent for the less volatile substance and a short period of treatment. For example, when an alkyl phthalate has been used with cellulose acetate, petroleum ether and benzene are useful as solvents to remove the alkyl phthalate from the inert foundation filament whilst not removing it altogether from the binding filament.

It may here be stated that a process has been described in and claimed by Specification No. 501,436 for the manufacture of textiles, to increase the tensile strength and the resistance to wear and laundering and to prevent untwisting of the yarns thereof without substantially altering the original appearance and porosity of the textile, comprising mixing together, before spinning, non-adhesive textile fibres or filaments and a minor proportion of at least one type of potentially-adhesive fibres or filaments, spinning the mixture of fibres or filaments into a single yarn, activating the potentially-adhesive fibres or filaments sufficiently to render them adhesive but not sufficiently to render the yarn formed therefrom non-porous, and squeezing the fibres or filaments of the yarn together while the fibres or filaments are in an adhesive condition to cause the fibres or filaments to adhere to each other at their points of contact.

In the accompanying drawing :—

Fig. 1 is an enlarged face view of a piece of knitted fabric according to this invention, made with a composite yarn having an inert foundation filament and a potentially-adhesive binding filament twisted together, in which the pitch of the twist is greater than the total length of one complete stitch;

Fig. 2 is a like view, in which the pitch of twist is equal to the total length of one complete stitch;

Fig. 3 is a like view, of a fabric in which the components of the composite yarn are not twisted together, and in which therefore there is a possibility of the number of unions being nil, or at the most being very small; and

Figs. 4 and 5 are diagrams to illustrate how the number of possible unions in a fabric according to Fig. 1 increases as the square of the number of twists per unit length of composite yarn.

Referring to Fig. 1 the yarn comprises a filamentary base or foundation element 1, for example of thrown silk or of viscose rayon, or of other filamentary natural or artificial material not potentially-adhesive in relation to the mode of treatment to be selected, and a filamentary binding element 2 twisted with the inert foundation filament 1, the element 2 being of cellulose acetate, or of ether rayon, or of locally

hydrolised acetate, or being an acetylated filament or other filamentary adhesive-forming substance, the selection being such that the subsequent treatment to bring about an adhesive condition will not affect the inert foundation element 1. The type of fabric shown is a simple, single-ply knit having loop stitches A and sinker stitches B, such as might be produced on an ordinary circular stocking-knitting machine. It will be observed that at the point 3, the binding element 2 crosses itself in contact, such point 3, being at the base of a loop A, and that these contacts occur at more or less random points but relatively frequent. As shown in Fig. 2 the points of contact are more numerous, and occur consistently at the same parts of the stitches. This regularity is difficult to achieve, and moreover the greater number of unions, whilst increasing the reinforcement of the fabric, may render the fabric too rigid for some purposes, e.g. for stockings.

In both cases shown, the main fabric which is formed from the inert foundation filament 1 has no unions in it, and therefore is elastically free. Should a stitch break at any point, whether in one element only or in both, laddering will occur only so far as the nearest points of adhesion of the binding filament 2.

In a preferred mode of carrying out the invention, for the manufacture of anti-laddering stockings, the stockings are knitted with a composite yarn such as is shown in Fig. 1, in which the binding filament is cellulose acetate, and the inert foundation filament 1 is viscose. After knitting, the stockings are first immersed in a bath containing a non-volatile gelatinising agent such as di-methyl phthalate in benzene, are then drained, dried, and finally subjected to a hot-pressing or ironing treatment which causes union of contacting adhesive parts. A suitable temperature for pressing is usually between 110° C. and 150° C., and a suitable time is ¼ minute or thereabouts; a suitable range of pressure is that adopted in normal hosiery finishing. All the optima for these factors may be found readily by trial. In order to prevent one side of the stocking sticking to the other side during the pressing operation it is necessary to insert a shielding material in the stocking, for example a wooden form, as in the known finishing art.

In this mode of treatment, instead of a mechanical pressure being employed, the goods may be subjected to a gaseous pressure in a closed chamber and at an elevated temperature.

In a modification of this mode of treatment, instead of a non-volatile solvent being applied to the yarn by immersing the goods in a bath containing the solvent, the non-volatile solvent is incorporated in the binding filament itself during its manufacture. In such case, after knitting, the goods are merely subjected to a heat and pressure treatment in either of the ways referred to above.

In another mode of operation, after the application of the non-volatile solvent to the knitted goods, the goods are passed to the dye bath, the heat of which effects gelatinisation. Alternatively, the gelatinising bath is also the dye bath, and the usual drying processes which follow will give the required heat treatment to bring about the adhesion.

In another convenient mode of carrying out the invention, also for the manufacture of anti-laddering stockings, the stockings are knitted with a composite yarn such as is shown in Fig. 1 and are then immersed in a sufficiently-strong bath of a volatile gelatinising agent, such as ethyl acetate, and a diluent such as pentane, and with or without a non-volatile solvent to act as a plasticiser, and are then dried at room temperature and pressure, or thereabouts, gelatinisation occurring in the bath or during evaporation according to the nature of the agent employed.

In another modification, the goods, instead of being dipped in a volatile gelatinising reagent, are exposed to a vapour, for example, chloroform vapour, preferably at superatmospheric pressure.

In cases where two layers of a stocking or of other tubular or folded articles would otherwise be in contact whilst adhesion is being brought about, and would become united, a shielding element will be inserted to prevent to adjacent layers of fabric adhering to each other, as described above.

This protection of the tubular goods from self-contact may not always be necessary; for example it may not be necessary when the adhesion is brought about whilst the goods are in an aqueous bath. It is believed that during and after the immersion of the goods in an aqueous gelatinising bath, absorption of water causes some swelling action as a preliminary to and distinct from gelatinisation, and that where such swelling occurs in two contacting binding filaments, within the fabric, the contact pressure is sufficient to guarantee at those points a union which does not take place elsewhere.

It may be found that, after some modes of treatment, the fabric has acquired a slight stiffness which is due to mere matting or incipient cohesion, between the yarns at points other than the main binding places where more or less complete

Skechers EX1013-p. 204
Skechers v Nike

union has occurred. This stiffness may be removed, and at the same time the yarn may be somewhat softened, by subjecting the fabric to an after-treatment which will break down such incipient connections without impairing the main unions. The after-treatment may comprise the application of a warm weak soap solution, or even of warm water alone, or of other media, and in some cases may comprise or include a light mechanical working.

Referring now to Fig. 3, it will be observed that in the fabric shown there are no unions. The elements 1 and 2 in this case are not twisted together and there is a probability that one of the elements will be thrown consistently to the outside of the fabric in the knitting process. If and where this occurs the anti-laddering effect is absent, for which reason it is necessary to twist the element together, if only slightly.

In Fig. 4, unit lengths of two portions of compound yarn are shown each having two twists. It will be obvious that, potentially, each of the parts X in one unit may unite with either of the parts X in the other unit, making four possibilities in all. In Fig. 5 equal units of compound yarn are shown, each having four twists. Here also, each of the parts X in one unit may unite with any one of the parts X in the other unit, making sixteen possibilities in all. The number of actual unions taking place will be roughly proportional to the number of possibilities offered, and the number of actual unions will vary substantially as the square of the number of twists per unit length of the compound yarn.

The following are examples of the carrying out of the invention, the fabric in all cases being brought to a clean scoured condition before the treatment begins :—

EXAMPLE 1.

The fabric was made from a composite yarn having a basic or foundation filamentary component of viscose of 75 denier with 2 turns Z twist per inch, and an auxiliary or binding filamentary component of cellulose acetate of 15 denier with 2 turns Z twist per 1", the two components being twisted together so as to have 4 turns S twist per 1". The fabric was knitted with 48 wales per 1" and with 48 courses per 1". The fabric was immersed for 30 seconds in a bath made up of :

4— 6 parts by volume di-methyl phthalate
96—94 parts by volume benzene

at a normal temperature and pressure, and then dried by evaporating, but so that the air-dry fabric contained about 15% by weight of the di-methyl phthalate. The fabric was then subjected to a hot pressing treatment for ¼ minute or thereabouts at 135° C. during which gelatinisation and adhesion took place, and to an after-treatment of 10 minutes duration at 70—80° C. in a ½% to 1% soap solution, and finally dried.

EXAMPLE 2.

In this case, the fabric was of the same construction as that used for Example 1, but the binding filament had from 10% to 15% (by weight) of di-methyl phthalate incorporated in it during its manufacture. No wet treatment was required for producing an adhesion. Instead the fabric was subjected to a heat and pressure treatment by being heated in a closed chamber for a short period at 140° C. under a gaseous pressure of 80 lbs. per square inch. The fabric was then subjected to the after-treatment in soap solution as in the preceding example.

EXAMPLE 3.

Fabric exactly as used for Example 2, but in which the binding filament contained from 10% to 15% (by weight) of di-methyl phthalate, or a fabric exactly as used for Example 1 but to the binding filament of which that amount of di-methyl phthalate had been applied by dipping and drying the goods, was then dyed in a bath at a temperature of from 70—80° C. and finished in the usual manner, gelatinisation and adhesion occurring during dyeing and/or finishing. No after-treatment in soap solution or the like was required in this case.

EXAMPLE 4.

A fabric as used for Example 1 was immersed for 30 seconds in a bath made up of

30—35 parts by volume ethyl acetate
62—68½ parts by volume pentane
1½— 3 parts by volume di-ethyl phthalate

at normal temperature and pressure, and the surplus liquor then removed as by centrifuging, the remaining volatile solvent (ethylacetate) then being allowed to evaporate slowly. Adhesion took place during evaporation. The major proportion of the non-volatile solvent (di-ethyl phthalate) was then removed from the main filament by a short washing-off treatment with petroleum ether, some of it being retained in the binding filament by preferential absorption. An after-treatment in soap solution was then carried out as in Example 1, and the fabric finally dried.

EXAMPLE 5.

A fabric as used in Example 1 was immersed in the following bath, and the treatment continued as in Example 4:—

12.5 parts of volume di-ethyl carbonate
35—40 parts of volume ethyl alcohol
40—45 parts of volume benzene
1—1.5 parts of volume di-methyl phthalate.

EXAMPLE 6.

A fabric as used in Example 1 was immersed in the following bath and the treatment continued as in Example 4:—
50 parts by volume butyl formate
50 parts by volume alcohol.

EXAMPLE 7.

A fabric as used for Example 1 was exposed to an atmosphere of chloroform vapour for an hour at normal temperature and pressure, during which exposure the adhesion took place, and the fabric was then subjected to the after-treatment as in Example 1. This example may be modified by the dilution of the chloroform vapour with air or an inert gas, and/or by the presence of a plasticiser (such as di-methyl phthalate) in or on the binding yarn. In all cases the treatment could be accelerated by raising the temperature and/or by raising the pressure of the gaseous reagent.

EXAMPLE 8.

A fabric as used for Example 1 was immersed for 30 seconds in a bath made up of
80 parts by volume methylene chloride
20 parts by volume benzene
at normal temperature and pressure, during which immersion the adhesion took place, the surplus liquor was then removed, and the remainder allowed to evaporate, after which an after-treatment was carried out as in Example 1.

EXAMPLE 9.

Knitted goods were made from thrown silk yarn composed of three silk threads, one of which, before twisting, had been printed at intervals of about ½" with a mixture containing cellulose acetate and di-methyl phthalate, carried in a volatile medium. Such a mixture may also contain softeners and/or a lubricant to assist knitting as in known practice. After knitting the goods were heat treated according to Example 2, to produce the desired adhesion.

In any of the foregoing examples where an immersion teatment is used, the immersion may be carried out under super-atmospheric pressure.

The conditions of evaporation of the solvent and diluent from the fabric may have considerable effect on the binding filament. The evaporation of the volatile solvents should preferably take place at a temperature above normal room temperature, and in an atmosphere containing the solvent in vapour form, and if necessary with the material undergoing a slow uniform movement.

As an alternative to the after-treatment with soap solution, when the adhesive-forming substance is cellulose acetate, an after-treatment with an aqueous solution of a swelling agent for cellulose acetate (such as acetone or di-acetone alcohol) may be used.

In the manufacture of such articles as stockings, the composite yarn may if desired be employed for a certain proportion only of the courses, and some other yarn be employed for the other courses. In such a case it may be necessary to use an equivalent count for that other yarn, so that there will be no noticeable "ringing" or like marking of the finished article.

The gelatinising process may, in the case of dyed goods, be carried out before or after or during dyeing. It is possible, by using this process, and particularly with the soaping as an after-treatment to give to rayon material some of the handle and appearance of real silk.

Whilst the invention has been described as related to the prevention or reduction of laddering, it is found also that the resulting knitted goods have an increased resistance to distortion, making them more amenable to mechanical processing, and have an increased resistance to curling and fraying.

Having now particularly described and ascertained the nature of my said invention and in what manner the same is to be performed, I declare that what I claim is :—

1. Method of manufacture of knitted goods of the type referred to, wherein the goods are knitted from a composite yarn which is composed of at least one inert foundation filament and at least one potentially-adhesive binding filament the filaments being twisted together with a low degree of twist; and wherein after knitting the goods are subjected to treatment which will render the binding filament or filaments tacky or adhesive and will cause mutually-contacting adhesive parts to unite; the degree of twist in the composite yarn being such that there are sufficient contacts of adhesive parts with each other to prevent laddering and such that there is sufficient relative freedom between the component filaments of the yarn to maintain the desired elasticity; and the nature of the treatment being such that, whilst two mutually-contacting adhesive parts will unite, one adhesive part will not, in general, unite with an inert filament.

2. Method according to claim 1, wherein the potentially-adhesive parts are rendered adhesive by heating, and pressure

Skechers EX1013-p. 206
Skechers v Nike

is applied during the heating to bring about union.

3. Method according to claim 1, wherein the potentially-adhesive parts are rendered adhesive by the application of a gelatinising agent.

4. Method according to claim 3, wherein the gelatinising agent is contained within the binding filament itself, and is rendered active by heating.

5. Method according to Claim 3, in which a diluent is employed with the gelatinising agent.

6. Method according to claim 1, in which the surface of the binding filament or filaments is potentially-adhesive throughout.

7. Method according to claim 1, in which the surface of the binding filament or filaments is potentially-adhesive only in some parts.

8. Method according to claim 1, in which the composite yarn has only one binding filament.

9. Method according to claim 1, in which the composite yarn is formed from one larger inert foundation filament and one or more than one smaller binding filament.

10. Method according to claim 9, in which the inert foundation filament is formed of silk or viscose and is twisted with one binding filament formed of cellulose acetate.

11. Method according to claim 10, in which di-methyl phthalate is applied to the goods after knitting, and the goods are then heated.

12. Method according to claim 3, wherein the gelatinising agents are volatile solvents, and have mixed with them one or more less volatile solvents to serve as plasticisers.

13. In the method according to any of the preceding claims, the use of a composite yarn having one inert foundation filament and one gelatinisable binding filament wherein prior to being twisted together the components were each twisted separately, the direction of twist being such that when the components are being twisted together the inert component is still further twisted whilst the gelatinisable component is untwisted.

14. The method of manufacture of knitted goods of the type referred to, and having anti-laddering properties, when carried out according to any one of the Examples herein set forth.

15. The method according to claim 1, wherein the adhesive-forming substances, of which the binding filaments are made, or with which they are coated, are synthetic-resin-forming substances, the adhesive state being producible during a condensation of the resin; and wherein the knitted goods are subjected to heat and pressure to condense the resin and thereby produce union at points where condensation occurs in the meeting surfaces of two binding filaments crossing in contact.

16. The method according to any of the preceding claims, wherein the knitted goods are subjected to an after-treatment in a warm aqueous bath, to break down incipient cohesion and mere matting without impairing the main unions.

17. In the method according to claim 12, the step of removing the less volatile solvents from the foundation filament but not completely from the binding filament or filaments by the use of a weak solvent for the less volatile solvent through a short period, and by relying on the preferential absorption of the binding filament or filaments for the less volatile solvent.

18. In a method according to any of the preceding claims in which adhesion is to be brought about by heating without pressure, the step of heating the knitted goods whilst immersed in an aqueous medium.

19. Method according to claim 1, wherein the goods are knitted from multi-thread thrown silk yarn, one of the threads of which has been coated throughout or at intervals with an adhesive-forming compound to constitute it a binding filament.

20. Knitted goods of the type referred to prepared or produced according to the method or process herein particularly described and ascertained.

21. For use in the manufacture of knitted goods of the type referred to, a composite knitting yarn consisting of at least one inert foundation filament and at least one potentially-adhesive binding filament, the components having been twisted together, and the degree of twist being such that in the knitted goods there will be a sufficient number of contacts between the auxiliary component or components and itself or themselves after treatment as herein set forth to prevent laddering whilst there will be sufficient relative freedom between the component filaments to maintain the desired elasticity.

22. A composite yarn according to claim 21, having an inert foundation filament, wherein the several components had each been twisted before they were brought and twisted together, the directions of twist being such that in twisting the components together, the foundation component became further twisted whilst the auxiliary component or components became slightly untwisted sufficiently to

Skechers EX1013-p. 207
Skechers v Nike

allow for relative shrinkage in the subsequent manufacturing process.

23. A composite yarn as claimed in claim 21 or 22, wherein the auxiliary component or each of them contains a substance which may be caused to gelatinise to produce an adhesive state.

24. For use in the manufacture of knitted goods of the type referred to, a knitting yarn according to claim 21 wherein the binding filament is potentially adhesive at some parts only of its length.

Dated this 14th day of November, 1940.

For the Applicant,
WILSON, GUNN & ELLIS,
54/56, Market Street, Manchester, 1.

Printed for His Majesty's Stationery Office, by M.M.P. Ltd.—1948

3rd Edition

[This Drawing is a reproduction of the Original on a reduced scale.]

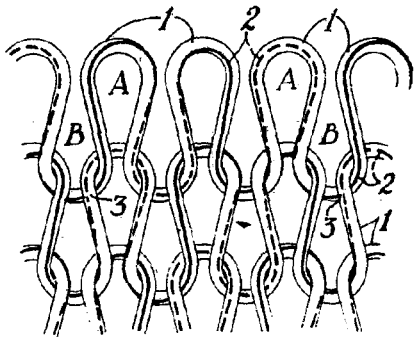


FIG. 1.

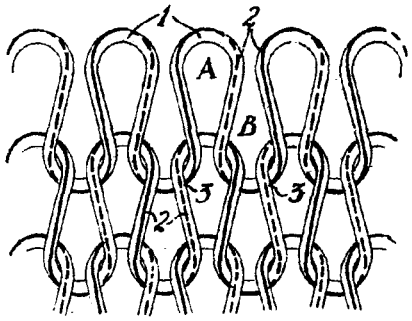


FIG. 2.

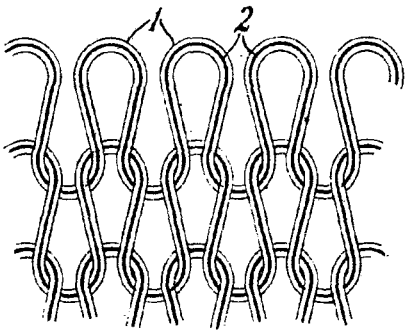


FIG. 3.




FIG. 4.




FIG. 5.

M.M.P. Ltd.

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 728 860 A1

(12) EUROPÄISCHE PATENTANMELDUNG

(43) Veröffentlichungstag:
28.08.1996 Patentblatt 1996/35

(51) Int. Cl.[6]: **D04B 1/04**, D03D 27/00

(21) Anmeldenummer: **96101888.4**

(22) Anmeldetag: **09.02.1996**

(84) Benannte Vertragsstaaten:
AT BE CH DE DK ES FR GB IE IT LI LU NL PT SE

(30) Priorität: **22.02.1995 DE 19506037**

(71) Anmelder: **Hoechst Trevira GmbH & Co KG**
65929 Frankfurt am Main (DE)

(72) Erfinder:
- **Dinger, Rolf**
  D-86845 Grossaitingen (DE)
- **Wiegand, Joachim, Dr.**
  D-86399 Bobingen (DE)
- **Fendt, Armin**
  D-86836 Graben (DE)

(54) Verformbare, hitzestabilisierbare textile Polware

(57) Die vorliegende Erfindung betrifft eine Polware aus einem textilen Rücken aus Maschenware oder Gewebe und darin eingebundenen henkelbildenden Polgarnen, deren textiler Rücken aus einem Multifilament-Hybridgarn aus einer Mischung aus niedriger schmelzenden und gekräuselten höher schmelzenden Filamenten besteht, die dreidimensional verformbar ist und deren Rücken durch eine Wärmebehandlung verfestigt werden kann. Die erfindungsgemäße Polware hat einen angenehm weichen, textilen Griff und kann z.B. als Bezugsstoff für Sitzmöbel oder zur textilen Oberflächengestaltung von kompliziert gestylten Flächen, wie z.B. der Innenseite von Autotüren, eingesetzt werden.

EP 0 728 860 A1

Beschreibung

Die vorliegende Erfindung betrifft eine Polware aus einem textilen Rücken aus Maschenware oder Gewebe und darin eingebundenen henkelbildenden Polgarnen, deren textiler Rücken aus einem Multifilament-Hybridgarn aus einer Mischung aus niedriger schmelzenden und gekräuselten höher schmelzenden Filamenten besteht, die dreidimensional verformbar ist und deren Rücken durch eine Wärmebehandlung verfestigt werden kann. Die erfindungsgemäße Polware hat einen angenehm weichen, textilen Griff und kann z.B. als Bezugsstoff für Sitzmöbel oder zur textilen Oberflächengestaltung von kompliziert gestylten Flächen, wie z.B. der Innenseite von Autotüren, eingesetzt werden.

Flächengebilde aus Hybridgarnen, die aus niedriger schmelzenden und höher schmelzenden Fasermaterialien zusammengesetzt sind, und die durch eine Wärmebehandlung verfestigt werden können, sind bereits bekannt.
So sind beispielsweise aus dem EP-B-0359436 Lamellenvorhänge bekannt, deren Lamellen aus einem Gewebe aus niedriger schmelzenden und höher schmelzenden Garnen bestehen, das nach seiner Herstellung einer Wärmebehandlung unterzogen wird, bei der die niedriger schmelzenden Garnanteile schmelzen und das Gewebe versteifen.

Es ist auch bekannt, aus Hybridgarnen, die einen hochschmelzenden oder unschmelzbaren Filamentanteil und einen thermoplastischen niedriger schmelzenden Filamentanteil aufweisen, Flächengebilde herzustellen, die durch Erwärmen über den Schmelzpunkt der thermoplastischen, niedriger schmelzenden Garnkomponente in faserverstärkte, steife Thermoplast-Platten, sog. "organische Bleche" überführt werden können.

Verschiedene Wege der Herstellung faserverstärkter Thermoplasthalbzeuge sind beschrieben worden in Chemiefasern/Textiltechnik 39./91. Jahrgang (1989) Seiten T185 bis T187, T224 bis T228 und T236 bis T240. Die Herstellung ausgehend von flächenförmigen Textilmaterialien aus Hybridgarnen wird dort als ein eleganter Weg beschrieben, der den Vorteil bietet, daß das Mischungsverhältnis von Verstärkungs- und Matrixfasern sich sehr exakt einstellen läßt und daß die Textilmaterialien sich aufgrund ihrer Drapierfähigkeit gut in Preßformen einlegen lassen (Chemiefasern/Textiltechnik 39./91. Jahrgang (1989), Seite T186).
Wie aus Seite T238/T239 dieser Publikation hervorgeht, ergeben sich Probleme allerdings bei der zweidimensionalen Verformung der Textilmaterialien. Da die Dehnungsfähigkeit der Verstärkungsfäden in der Regel vernachlässigbar klein ist, können Textilflächen aus herkömmlichen Hybridgarnen, nur noch aufgrund ihrer Bindung verformt werden.
Dieser Verformbarkeit sind jedoch in der Regel enge Grenzen gesetzt, wenn Faltenbildung vermieden werden soll (T239), eine Erfahrung die durch Computersimulationen bestätigt wurde.
Der Ausweg, die Textilien aus Verstärkungs- und Matrixfäden in Formen zu pressen ist mit dem Nachteil behaftet, daß dann eine partielle Stauchung eintritt, was zu einer Verlagerung und/oder Kräuselung der Verstärkungsfäden, verbunden mit einem Abfall der Verstärkungswirkung, führt.
Eine weitere in Seite T239/T240 angesprochene Möglichkeit, dreidimensional verformte Formteile mit unverlagerten Verstärkungsfäden herzustellen, bestünde in der Herstellung dreidimensional gewebter Vorformlinge, was aber erheblichen maschinellen Aufwand, sowohl bei der Herstellung der Vorformlinge als auch bei der Thermoplast-Imprägnierung oder -Beschichtung, bedingt.

Zur Verbesserung der Verformbarkeit von Verstärkungseinlagen dient ein aus der DE-A-40 42 063 bekanntes Verfahren. Bei diesem werden in das als Textilbewehrung vorgesehene Flächengebilde längenverformbare, nämlich hitzeschrumpfende, Hilfsfäden eingearbeitet. Durch Erwärmen wird der Schrumpf ausgelöst und das Textilmaterial etwas zusammengezogen, sodaß die Verstärkungsfäden gewellt oder in loser Umschlingung gehalten werden.

Aus der DE-A-34 08 769 ist eine Verfahren bekannt zur Herstellung von faserverstärkten Formkörpern aus thermoplastischem Material, bei dem flexible textile Gebilde eingesetzt werden, die aus weitgehend unidirektional ausgerichteten Verstärkungsfasern und aus einer aus thermoplastischen Garnen oder Fasern aufgebauten Matrix bestehen. Diese Halbzeuge werden bei Ihrer endgültigen Formgebung durch heizbare Profildüsen verformt, wobei praktisch alle thermoplastischen Fasern aufgeschmolzen werden.

Aus der Europäischen Patentanmeldung EP-A-0 260 872 ist ein getuftetes Textilmaterial bekannt bei dem Polgarne in einen Primärrücken aus Vliesstoff getufted sind, der relativ niedrig schmelzende Garne enthält. Durch eine Wärmebehandlung der getufteten Ware werden die niedriger schmelzenden Faserbestandteile des Vliesrückens geschmolzen, wobei der Rücken verfestigt wird und die Polgarne darin eingebunden werden.

Aus der Europäischen Patentanmeldung EP-A-0 568 916 ist ein getuftetes Textilmaterial bekannt bei dem Polgarne, die niedrig schmelzende Fasern enthalten, in einen mehrschichtigen Primärrücken getufted sind. Durch eine gezielte Wärmebehandlung, die nur den Rücken der getufteten Ware beeinflußt, werden die niedriger schmelzenden Garnbestandteile der Polgarne geschmolzen und in den Rücken eingebunden. Dabei sorgt eine auf der Polseite vorhandene besondere Schicht des mehrschichtigen Rückens für eine Wärmeisolierung, um eine Verhärtung der Polgarne zu verhindern.

Aus der Japanischen Patent-Offenlegungsschrift 30 937/1984 ist eine Polware bekannt aus einem Grundgewebe, in das Polgarne eingebunden sind. Das Grundgewebe besteht aus einem Garn aus niedriger schmelzenden und höher schmelzenden Fasern. Nach der Herstellung des Gewebes und Einbinden des Pols wird das Material auf eine Temperatur erwärmt, bei der die niedriger schmelzenden Fasern schmelzen, wobei eine Verfestigung des Geweberückens erfolgt. Aus dem Beispiel dieser Druckschrift ist zu ersehen, daß das zu Herstellung des gewebten Rückens einge-

Skechers EX1013-p. 211
Skechers v Nike

setzte Garn ein Stapelfasergarn ist, das aus einer Mischung niedriger schmelzender und höher schmelzender Stapelfasern durch Sekundärspinnen erhalten wird.

Diese Druckschriften geben allerdings keine Hinweise zur Herstellung einer Polware, die verformbar ist, d.h. sich zum Überziehen kompliziert dreidimensional gestalteter Flächen eignet.

In der deutschen Patentanmeldung P 42 09 970.6 ist bereits vorgeschlagen worden, einen Strukturplüsch aus einem gestrickten Rücken und darin mustermäßig eingebundene Polgarne herzustellen, wobei vorzugsweise Garne aus Polyestern eingesetz werden. Allerdings können die dort beschriebenen Materialien nicht thermoverfestigt werden und ihre Verformbarkeit ist auf das aus der Gestrickstruktur des Rückens sich ergebende Ausmaß begrenzt.

Hybridgarne aus unschmelzbaren (z.B. Glas- oder Kohlenstoffaser) und schmelzbaren Fasern (z.B. Polyesterfaser) sind bekannt. So betreffen beispielsweise die Patentanmeldungen EP-A-156 599, 156 600, 351 201 und 378 381 und die Japanische Druckschrift JP-A-04 353 525 Hybridgarne aus nichtschmelzbaren Fasern, z.B. Glasfasern, und thermoplastischen, z.B. Polyester-Fasern.
Auch die EP-A-551 832 und die DE-A-29 20 513 betreffen Mischgarne, die allerdings gebondet werden, vorher aber als Hybridgarn vorliegen.

Aus dem Europäischen Patent EP-B-0 325 153 ist ein textiles Flächengebilde aus Polyestergarnen mit einem Craquelé-Effekt bekannt, das zum Teil aus kaltverstreckten, höher schrumpfenden und zum Teil aus warmverstreckten normalschrumpfenden Polyesterfasern besteht. Bei diesem Material wird der Craquelé-Effekt durch Auslösen des Schrumpfs der höherschrumpfenden Fasern herbeigeführt.
Aus der EP-B- 0 336 507 ist ein Verfahren zum Verdichten eines textilen Flächengebildes aus Polyestergarnen bekannt, das zum Teil aus kaltverstreckten, höher schrumpfenden und zum Teil aus warmverstreckten, normalschrumpfenden Polyesterfasern besteht. Bei diesem Material wird die Verdichtung durch Auslösen des Schrumpfs der höherschrumpfenden Fasern herbeigeführt.

Aus der EP-A-0 444 637 ist ein Verfahren bekannt zur Herstellung eines gekräuselten Hybridgarns aus niedriger schmelzenden und höher schmelzenden Filamentgarnen. Bei diesem Verfahren wird zuerst das höher schmelzende Garn in einer Texturierdüse (bulking jet gemäß US-A-3 525 134) gekräuselt, dann wird es mit der niedriger schmelzende Garnkomponente vereinigt und beide Garne in einer zweiten Texturierdüse gemeinsam gekräuselt.

Eine Aufgabe der vorliegenden Erfindung ist es, eine Polware bereitzustellen, die einen angenehm weichen, "textilen" Griff hat, in vielen ansprechenden Dekors herstellbar ist, eine gute Drapierfähigkeit hat, sich dreidimensional verformen und damit auch kompliziert dreidimensional gestalteten Oberflächen, wie z.B. Sitz- und Rückenlehnenflächen von Sitzmöbeln oder der Innenseite von Autotüren, faltenlos anpassen läßt, und deren Rücken durch einfaches Erwärmen in einem den Erfordernissen der Weiterverarbeitung angepaßten Umfang verfestigt und versteift werden kann.

Die im Folgenden beschriebene erfindungsgemäße Polware löst diese Aufgabe.

Ein Gegenstand der vorliegenden Erfindung ist eine Polware aus einem textilen Rücken aus Maschenware oder Gewebe und darin eingebundenen henkelbildenden Polgarnen, deren textiler Rücken aus einem Multifilament-Hybridgarn aus mindestens 2 Sorten A und B von Filamenten und ggf. Begleitfilamenten C besteht, die dadurch gekennzeichnet ist, daß

die Filamente A	texturiert sind und einen Schmelzpunkt über 180°C, vorzugsweise über 220°C insbesondere über 250°C haben,
die Filamente B	einen Schmelzpunkt unter 220°C, vorzugsweise unter 200°C, insbesondere unter 180°C haben,

der Schmelzpunkt der Filamente B mindestens 20°C, vorzugsweise mindestens 40°C, insbesondere mindestens 80°C unter dem Schmelzpunkt der Filamente A liegt, und
das Gewichtsverhältnis der Filamente A:B im Bereich von 20:80 bis 80:20, vorzugsweise von 40:60 bis 60:40 liegt und das Multifilament-Hybridgarn noch bis zu 40 Gew.-% Begleitfilamente C enthält.

Ein wesentlicher Vorteil dieser Polware besteht darin, daß sie dreidimensional verformbar ist.
Diese wertvolle Eigenschaft wird besonders begünstigt und auch dann erzielt, wenn der Rücken aus einem Gewebe besteht, wenn die höherschmelzenden texturierten Filamente A eine Einkräuselung von 3 bis 50 %, vorzugsweise von 8 bis 30 %, insbesondere von 10 bis 22 % aufweisen.

Die Einkräuselung der höherschmelzenden Filamente kann im Prinzip nach allen bekannten Methoden erfolgen, bei denen in die Filamente bei erhöhter Temperatur eine zwei- oder dreidimensionale Kräuselung einfixiert wird. Geeignete bekannte Verfahren sind z.B. die Stauchkammerkräuselung, die Zahnradkräuselung, das "knit-deknit"-Verfahren, bei dem ein Garn zunächst zu einem Strickschlauch gestrickt wird, dieser thermofixiert und anschließend wieder aufgezogen wird. Das bevorzugte Verfahren zur Texturierung der Filamente A ist jedoch das in zahlreichen Veröffentlichungen beschriebene Falschdrahtverfahren.

Zweckmäßigerweise sind die höherschmelzenden texturierten Filamente A luftdüsentexturiert oder vorzugsweise falschdrahttexturiert.

Eine weitere besonders wertvolle Eigenschaft der erfindungsgemäßen Polware besteht darin, daß ihr Rücken durch eine Wärmebehandlung verfestigt werden kann. Hierbei bilden die niedriger schmelzenden Filamente B des Mul-

Skechers EX1013-p. 212
Skechers v Nike

tifilament-Hybridgarns des textilen Rückens zumindest partiell eine Matrix, die die höherschmelzenden texturierten Filamente des Multifilament-Hybridgarns untereinander und mit dem Polgarn im Bereich der Rückenebene miteinander verbindet.

Unter Matrix im Sinne dieser Erfindung ist eine zusammenhängende Polyestermasse zu verstehen, die durch das vollständige oder partielle Schmelzen der Filamente B, oder durch ein Miteinanderverkleben der bis zur Klebrigkeit erweichten Filamente B gebildet wird.

Um diese Verfestigungsmöglichkeit zu erzielen, ohne dabei unerwünschte Einbußen bezüglich Festigkeit, Formhaltigkeit der Ware unter erschwerten Anwendungsbedingungen oder an textilem Griff und Aspekt des Flors hinnehmen zu müssen, ist es zweckmäßig und vorteilhaft, wenn die Filamente A einen Schmelzpunkt von über 220°C, vorzugsweise von 220 bis 300°C, insbesondere von 240-280°C haben.

Ferner ist es zweckmäßig und vorteilhaft, wenn die Filamente B einen Schmelzpunkt von unter 220°C, vorzugsweise von 110 bis 220°C, insbesondere von 150 bis 200°C haben.

Erfindungswesentlich ist somit der Einsatz von Filamentsorten A,B für die bestimmte Schmelzpunktsvorgaben bestehen.

Der Schmelzpunkt der Filamente wird an dem zu Ihrer Herstellung verwendeten Polymer-Rohstoff bestimmt. Eine Besonderheit vieler Polymermaterialien, wie z.B. auch von Polyestermaterialien, besteht darin, daß sie in der Regel vor dem Schmelzen erweichen und der Schmelzvorgang sich über einen relativ großen Temperaturbereich erstreckt. Dennoch ist es möglich, gut reproduzierbare, für diese Polymermaterialien, z.B. für Polyestermaterialien, charakteristische Temperaturpunkte zu ermitteln, bei denen die untersuchte Probe ihre geometrische Form verliert, d.h. in einen flüssigen (wenngleich oft hochviskosen) Zustand übergeht. Die Bestimmung dieser charakteristischen Temperaturpunkte erfolgt mit sogenannten Penetrometern (analog DIN 51579 bzw. 51580), bei denen auf ein Chip oder Pellet der zu untersuchenden Polymerprobe eine Meßspitze definierter Dimension unter definiertem Druck aufgesetzt wird, die Probe dann mit definierten Aufheizgeschwindigkeit erwärmt und das Eindringen der Meßspitze in das Polymermaterial messend verfolgt wird.

Sobald die Probe, z.B. die Polyesterprobe erweicht, beginnt ein sehr langsames Eindringen der Meßspitze in das Material.

Das Eindringen der Meßspitze kann sich bei steigender Temperatur wieder verlangsamen und auch ganz zum Stillstand kommen, wenn die erweichte, zunächst amorphe Polyestermasse kristallisiert.

In diesem Fall zeigt sich bei weiterer Erhöhung der temoeratur ein zweiter Erweichungsbereich der dann im folgenden beschriebenen "Schmelzbereich" übergeht.

Der genannte "Schmelzbereich" ist ein bestimmter recht enger, für das Material charakteristischen Temperaturbereich, in dem eine auffällige Beschleunigung des Eindringens der Meßspitze in das Polyestermaterial erfolgt. Als gut reproduzierbarer Schmelzpunkt kann dann ein Temperaturpunkt definiert werden, bei dem die Meßspitze eine bestimmte Eindringtiefe erreicht hat.

Als Schmelzpunkt im Sinne dieser Erfindung wird der Temperaturpunkt (Mittelwert aus 5 Messungen) definiert, bei dem eine Meßspitze mit einer kreisförmigen Auflagefläche von 1 mm^2 unter einem Auflagegewicht von 0,5 g in eine mit 5°C/min aufgeheizte Polymerprobe, z.B. Polyesterprobe, 1000 µm tief eingedrungen ist.

Sowohl aus Gründen der Herstellung der erfindungsgemäßen Polware als auch aus Gründen einer besonders vorteilhaften Verteilung des Matrixmaterials bei der Verfestigung des Rückens (kurze Fließwege) ist es bevorzugt, daß zwischen den Filamente A und B und ggf. C Fadenschluß besteht.

Der Fadenschluß zwischen den Filamenten ist erforderlich um einen Fadenkörper zu bilden, der nach Art eines Garns verarbeitet werden kann, d.h. der z.B. verwebt oder verwirkt werden kann, ohne daß sich Einzelfilamente des Verbundes aus diesem lösen oder größere Schlaufen bilden und somit zu Störungen der Verarbeitungsschritte führen.

Der erforderliche Fadenschluß kann z.B. dadurch herbeigeführt werden, daß dem Garn ein sogenannter Schutzdrall von z.B 10 bis 100 Drehungen/m vermittelt wird, oder daß die Filamente punktuell miteinander verschweißt werden. Vorzugsweise wird der erforderliche Fadenschluß durch Verwirbelung in einer Jet-Düse herbeigeführt wobei die zu einem Garn zu verbindenden Filamente in einem engen Faden Kanal seitlich mit einem scharfen Gasstrahl angeblasen werden. Der Grad der Verwirbelung und damit die Güte des Fadenschlusses kann dabei durch die Stärke der Anblasung variiert werden.

Vorzugsweise sind die Filamente A,B und ggf. C des Multifilament-Hybridgarns miteinander verwirbelt, wobei der Verwirbelungsgrad des Multifilament-Hybridgarns zweckmäßigerweise einer Öffnungslänge von 10 bis 100 mm entspricht.

Der Verwirbelungsgrad wird charakterisiert durch die Angabe der Öffnungslänge, die gemäß der in US-A-2 985 995 beschriebenen Nadeltest-Methode mit einem ITEMAT Nadeltest-Gerät gemessen wird.

Weitere bevorzugte Merkmale des Multifilament-Hybridgarns, die je nach Anwendungserfordernissen oder Zweckmäßigkeit einzeln oder in wechselnden Kombinationen vorliegen können, sind, daß die Filamente B glatt sind, das Multifilament-Hybridgarn keine Begleitfilamente C enthält, es einen Gesamttiter von 80 bis 500 dtex, vorzugsweise 100 bis 400 dtex, insbesondere 160 bis 320 dtex, hat, die höherschmelzenden texturierten Filamente A einen Einzelfilament-

Skechers EX1013-p. 213
Skechers v Nike

Titer von 0,5 bis 15 dtex, vorzugsweise von 2 bis 10 dtex, haben, und die niedrigerschmelzenden Filamente B einen Einzelfilament-Titer von 1 bis 20 dtex, vorzugsweise von 3 bis 15 dtex, haben.

Im Interesse einer guten textilen Qualität der erfindungsgemäßen Polware ist es zweckmäßig ein Multifilament-Hybridgarn einzusetzen dessen höherschmelzende texturierte Filamente A einen Anfangsmodul von 15 bis 28 N/tex, vorzugsweise von 20 bis 25 N/tex, und eine feinheitsbezogene Höchstzugkraft von über 25 cN/tex, vorzugsweise von über 30 cN/tex, insbesondere von 30 bis 40 cN/tex haben.

Es hat sich als vorteilhaft erwiesen, insbesondere bei der Herstellung von erfindungsgemäßen Polwaren mit dunkleren Farbtönen einen Rücken zu benutzen der ebenfalls in dunkleren Tönen gefärbt ist. Ist der Rücken wesentlich heller als der Pol so kann es passieren, daß beim Streichen über den Pol oder beim Legen der Polware über Strukturen mit geringem Krümmungsradius der hellere Rücken durch den Pol hindurchscheint ("durchgrinsen").
Es ist daher bevorzugt, daß die höherschmelzenden texturierten Filamente A gefärbt, vorzugsweise spinngefärbt sind. Die niedrigerschmelzenden Filamente B können spinngefärbt, oder vorzugsweise rohweiß sein, da es sich gezeigt hat, daß beim thermischen Verfestigen des Rückens das Material des Filamente B weitestgehend von den Strängen der Filamente A aufgenommen wird und sich insgesamt die dunkle Farbe der Filamente A ergibt.

Es hat sich gezeigt, daß bei der Herstellung des Rückens neben den erfindungsgemäß einzusetzenden Multifilament-Hybridgarn auch andere Garne mitverarbeitet werden können. Zweckmäßigerweise soll jedoch der Anteil des Multifilament-Hybridgarns im Rücken mindestens 30 %, vorzugsweise mindestens 75 %, insbesondere 100% betragen.

Für die meisten Applikationen ist es zweckmäßig daß das Flächengewicht der erfindungsgemäßen Polware 100 bis 1000 g/m^2, vorzugsweise 200 bis 500 g/m^2 beträgt und daß das Gewichtsverhältnis von textilem Rücken zu Polgarn in der Rohware im Bereich von 20:80 bis 40:60 liegt.

Ferner ist es zweckmäßig, daß die Henkel eine Länge von 1,0 bis 6,0 mm, im Falle von Scherplüsch vorzugsweise von 2,8 bis 3,5 mm, im Falle von Kurzhenkelplüsch vorzugsweise von 1,0 bis 2,5 mm, haben.

In der Regel genügt die erfindungsgemäße Polware den Anforderungen an Innendekorationsmaterial wenn der Gesamttiter des Polgarns 50 bis 800 dtex, vorzugsweise 100 bis 400 dtex beträgt.
Dabei beträgt der Einzelfilament-Titer des Polgarns normalerweise 0,5 bis 10 dtex, vorzugsweise 0,7 bis 6 dtex, insbesondere 3 bis 6 dtex.
Mit Rücksicht auf den textilen Charakter der erfindungsgemäßen Polware ist es bevorzugt, daß die Polgarne texturiert, vorzugsweise blas-oder falschdrahttexturiert, sind.

Der Pol selbst kann aus ungeschnittenen Polgarn-Schlingen oder aus geschnittenen Polgarn-Enden bestehen.

Wie oben bereits angegeben ist eine Ausführungsform der erfindungsgemäßen Polware dadurch gekennzeichnet, daß der textile Rücken aus Maschenware besteht.
In dieser Ausführungsform kann der Rücken der erfindungsgemäßen Polware gewirkt oder gestrickt sein.
Die gewirkten textilen Flächen können kettengewirkt oder kuliergewirkt sein.

Ein gestrickter oder gewirkter Rücken kann Rechts/Rechts, Links/Links oder eine Rechts/Links-Maschenstruktur und deren bekannte Varianten sowie Jacquard-Musterungen aufweisen.
Die Rechts/Rechts-Maschenstruktur beinhaltet beispielsweise auch deren Varianten plattiert, durchbrochen, gerippt, versetzt, Welle, Fang oder Noppe sowie die Interlock-Bindung Rechts/Rechts/Gekreuzt.
Die Links/Links-Maschenstruktur beinhaltet beispielsweise auch deren Varianten plattiert, durchbrochen, unterbrochen, versetzt, übersetzt, Fang oder Noppe. Die Rechts/Links-Maschenstruktur beinhaltet beispielsweise auch deren Varianten plattiert, hinterlegt, durchbrochen, Plüsch, Futter, Fang oder Noppe.

Wie oben ebenfalls bereits angegeben, ist eine weitere Ausführungsform der erfindungsgemäßen Polware dadurch gekennzeichnet, daß der textile Rücken gewebt ist.
Im Prinzip kann ein gewebter Rücken alle bekannten Gewebekonstruktionen aufweisen wie die Leinwandbindung und deren Ableitungen, wie z.B. Ripse-, Panama-, Gerstenkorn- oder Scheindreherbindung, oder die Köperbindung und deren vielfache Ableitungen, von denen nur beispielsweise Fischgratköper, Flachköper, Flechtköper, Gitterköper, Kreuzköper, Spitzköper, Zickzackköper, Schattenköper oder Schatten-Kreuzköper genannt seien. (Wegen der Bindungsbezeichnungen vergl. DIN 61101)

Die Gewebe- oder Maschenbindungen werden nach dem beabsichtigten Einsatzzweck des erfindungsgemäßen Textilmaterials ausgewählt, wobei rein technische Zweckmäßigkeit ausschlaggebend sind, gelegentlich aber auch zusätzlich dekorative Gesichtspunkte berücksichtigt werden können. Bevorzugte Maschenstruktur ist die Grundbindungen Rechts/Rechts, Links/Links oder eine Rechts/Links, bevorzugte Gewebebindung ist die Leinwandbindung ggf. mit einfachen Ableitungen ohne größere Flottierungen.
Bevorzugt sind jeweils die Grundstrukturen der Maschenware oder Gewebe.

Die Dichte der Rückenfläche liegt je nach der Anwendung für die das Material vorgesehen ist und je nach dem Titer der bei der Herstellung eingesetzten Garne bei Geweben im Bereich von 10 bis 25 Fäden/cm, vorzugsweise von 14 bis 20 Fäden/cm in Kette und Schuß, bei Maschenware bei einer entsprechenden Maschendichte von ca. 12 bis 30 Nadeln/inch, vorzugsweise 16 bis 24 Nadeln/inch. Innerhalb dieses Bereichs können die Dichten natürlich dem beabsichtigten Anwendungsfall angepaßt werden.

Skechers EX1013-p. 214
Skechers v Nike

Je nach den Anforderungen des Anwendungsfalls und insbesondere des angestrebten Struktordekors des Pols weisen bei einem Rücken aus Maschenware mindestens 30 %, vorzugsweise 60 bis 100 % der Maschen Polgarne auf. Aus dem gleichen Grund kann es zweckmäßig sein, daß bei einem Rückengewebe nicht jeder Kett-und/oder Schußfaden Polnoppen einbindet. In der Regel binden bei einem Rückengewebe 30 %, vorzugsweise 60 bis 100 % der Kett- und/oder Schußfäden Polnoppen ein.

Durch eine gezielt gesteuerte Einbindung von Polnoppen in die Rückenfläche können sehr dekorative Plüsche mit interessanten Oberflächenstrukturen und Dekors erzeugt werden. Derartige Erzeugnisse sind unter der Bezeichnung "Strukturplüsch" bekannt.

Die Struktur und Herstellung dieser dekorativen Strukturplüsche, mit gewebtem Rücken oder einem Rücken aus Maschenware soll im Folgenden anhand eines gestrickten Rückens erläutert werden. Die beschriebene Struktur kann sinngemäß und analog auch auf Polwaren mit gewebtem Rücken übertragen werden.

Wegen des erfindungsgemäßen Einsatzes des Multifilament-Hybridgarns ergibt sich auch bei gewebtem Rücken eine dreidimensional verformbare, durch Hitze zu verfestigende Polware.

Eine solche, besonders bevorzugte, dekorative Plüschkonstruktion besteht aus einem gestrickten Strukturplüsch mit hoher Verformbarkeit, aus Grund- und Henkelgarnen, der als Henkelgarne Filamentgarne aufweist, die, bezogen auf eine Maschinenteilung von 18 oder 20 Nadeln pro inch, einen Gesamttiter von 300 - 400 dtex, vorzugsweise 345 - 360 dtex, haben, dessen Grundgarn, bezogen auf eine Maschinenteilung von 18 oder 20 Nadeln pro inch einen Gesamttiter von 300 bis 370 dtex, vorzugsweise 320 - 350 dtex, hat, wobei die Einzeltiter der Filamente größer als 1,5 dtex, vorzugsweise größer als 2,5 dtex sind, und dessen Flächengewicht etwa 350 bis 550 g/m^2 beträgt, und dessen Grundmaschen in Strukturzonen kein Henkelgarn enthalten.

Strukturzonen im Sinne dieser Erfindung sind Bereiche, in denen der erfindungsgemäße Strickplüsch keine Henkel aufweist.

Auch die zur Herstellung des Strukturplüsches geeignete Grundgarne bestehen zweckmäßigerweise ebenfalls aus synthetischen Filamenten. Geeignete Filamentmaterialien für Grund- und Henkelgarne sind beispielsweise Polyester-, Polyamid- oder Polyacrylnitril-Filamente; bevorzugt sind Polyesterfilamente. Sprechen keine besonderen anwendungstechnische Forderungen für die Verwendung unterschiedlicher Materialien in Henkel- und Grundgarn, so ist es bevorzugt, für beide Polyester-Filamentgarne einzusetzen.

Zweckmäßigerweise haben alle im Polgarn enthaltenen Filamente einen Schmelzpunkt der mindestens 20°C, vorzugsweise mindestens 40°C insbesondere mindestens 80°C über dem Schmelzpunkt der Filamente B des Multifilament-Hybridgarns liegt. Ist dies aus besonderen Gründen nicht der Fall so ist bei der Verfestigung des Rückens der erfindungsgemäßen Polware darauf zu achten, daß die Wärmebehandlung auf den Rücken des Materials beschränkt wird, z.B. durch Kontakterwärmung an einer Heizfläche, um eine Verhärtung des Polgarns zu vermeiden.

Bevorzugt, insbesondere für Garn- und Einzeltiter im unteren Teil des angegebenen Titerbereichs, werden texturierte Garne. Dabei ist es besonders vorteilhaft, wenn Grundgarne falschdrahttexturiert, Henkelgarne falschdraht- oder luftdüsentexturiert sind.

Die erfindungsgemäßen Stukturplüsche können auch aus Mischgarnen aus glatten und texturierten Filamenten bestehen oder solche Garne enthalten.

Geeignete Garne im oben angegebenen Titerbereich sind beispielsweise unter den Handelsnamen ®TREVIRA texturiert, in verschiedenen Typen, bekannt.

Wie oben ausgeführt, beziehen sich die oben angegebenen Gesamttiter der in den erfindungsgemäßen Strukturplüsch enthaltenen Grund- und Henkelgarne auf eine Maschendichte entsprechend einer Maschinenteilung von 18 oder 20 Nadeln pro inch. Bei feinerer Maschinenteilung werden die Titer von Grund - und Henkelgarnen entsprechend herabgesetzt.

Die Einzeltiter der Grund- und Henkelgarne liegen oberhalb 1,5 dtex und sollten zweckmäßigerweise 5 dtex nur bei besonderen Anforderungen an den Plüsch übersteigen. Die Titerauswahl innerhalb dieses Bereichs richtet sich einerseits nach den gewünschten Eigenschaften der erfindungsgemäßen Strukturplüsche. Strukturplüsche aus Garnen, insbesondere aus Henkelgarnen mit Einzeltitern unterhalb 3 dtex, sind weicher, dichter und seidiger als solche aus Garnen mit höheren Einzeltitern. Andererseits sind neben den Qualitäts- und Echtheitsanforderungen auch wirtschaftliche Gesichtspunkte bei der Titerauswahl zu berücksichtigen. So ist es zweckmäßig, wenn keine anderen Anforderungen dagegen sprechen, Garne mit Einzeltitern von 2,5 dtex bis 5 dtex, insbesondere handelsübliche Standardtypen, einzusetzen.

Für besonders hohe Qualitäten und insbesondere wenn eine sehr ansprechende Optik und angenehmer Griff gewünscht werden ist es bevorzugt, Profilfilamente wie z.B. solche mit ovalem, hantelförmigem oder bändchenförmigem Querschnitt, der auch noch eine oder mehrere Einschnürungen aufweisen kann, oder Dreikant-, Dreilapp (trilobal)- und besonders Achtlapp (oktolobal)- Profile einzusetzen.

Der Henkelanteil liegt beim erfindungsgemäßen Strukturplüsch in Abhängigkeit vom Dessign bei 40 - 75 %, vorzugsweise bei 45 - 60 %, insbesondere bei etwa 50 %. Der hier in Rede stehende "Henkelanteil" ist der Anteil in % der im Rapport vorhandenen Henkel zur Anzahl der auf der gleichen Fläche des Grundmaterials bei Vollplüsch maximal möglichen Henkel.

Skechers EX1013-p. 215
Skechers v Nike

$$\text{Henkelanteil [\%]} = \frac{\text{Anzahl der im Rapport vorhandenen Henkel x 100}}{\text{Anzahl der bei Vollplüsch maximal möglichen Henkel}}$$

Während bei herkömmlichen Strickplüschen der Gewichtsanteil des Grundmaterials etwa 25-28 Gew.% des Gesamtgewichts beträgt, beläuft sich der Gewichtsanteil des Grundmaterials beim erfindungsgemäßen Strukturplüsch aufgrund der hohen Titer sowohl im Henkel- als auch im Grundgarn und wegen seines oben beschriebenen, sehr kompakten Aufbaus auf 40-45 Gew% und kann je nach dem Dessign (d.h. bei geringerem Henkelanteil) auch noch darüber liegen.

Zur Gestaltung des Oberflächendessigns können die Maschen der Grundware mustermäßig mit Henkeln kombiniert sein, was durch entsprechende jacquardmäßige Nadelauswahl der Strickmaschine erreicht wird oder es können Henkel-Leerreihen, d.h. komplette Grundreihen ohne Henkel vorliegen.

Beispielsweise können auf 1 bis 5 Henkelreihen eine oder zwei Reihen ohne Henkel folgen (Querripp-Effekt). Auch Muster mit gewebeähnlichem Charakter lassen sich auf diese Weise herstellen. Auf diese Weise hergestellte Dessigns, die längslaufende und/oder querlaufende und/oder diagonallaufende Gassen aufweisen, die als eine Art von Lüftungskanälen wirken, tragen bei der Verwendung dieser Stukturplüsche als Sitzbezüge wesentlich zum Sitzkomfort bei.

Die erfindungsgemäßen Strukturplüsche haben aufgrund der oben genannten Merkmale, insbesondere der hohen Dichte des Grundgewebes, der hohen Garnstärke in Grund- und Henkelgarn und der damit erzielten hohen Poldichte, aber auch durch eine ggf. angewandte den Pol zusätzlich stabilisierende Ausrüstung, und dem daraus resultierenden sehr guten Polstand auch bei kritischen Dessigns eine sehr gute Stabilität.

Von besonderer anwendungstechnischer Bedeutung ist es, daß trotz der sehr kompakten, dichten Warenkonstruktion die Dehnbarkeit und die reversible und irreversible Verformbarkeit des erfindungsgemäßen Strukturplüsches noch in weiten Grenzen den anwendungstechnischen Forderungen angepaßt werden kann durch die Einstellung der Strickmaschine (Warenfestigkeit), die Wahl der Elastizität und/oder Einkräuselung des Grundgarns und/oder eine Nachbehandlung des Strukturplüsches z.B. durch eine der gewünschten Verformbarkeit angepaßte Schrumpfbehandlung.

Die Einstellung der Dehnung erfolgt entsprechend dem Ausmaß der bei der Weiterverarbeitung zu dreidimensional geformten Gegenständen, wie z.B. Sitzbezügen oder speziellen tiefgezogenen Verkleidungselementen, beispielsweise in einem Autoinnenraum, notwendigen Verformung.

Durch die freie Einstellbarkeit der Dehnung ergibt sich für die erfindungsgemäßen Strukturplüsche neben der einfacheren Herstellung auch ein zusätzlicher Qualitätsvorteil gegenüber den nahezu oder völlig unelastischen Geweben aus Flockgarnen. Bei letzteren ist eine gewisse Verformbarkeit nur durch aufwendige Konstruktionen unter Einsatz von speziellen Garnen mit hoher Dehnbarkeit erreichbar.

Der Pol der erfindungsgemäßen Strukturplüsche wird bevorzugt auf etwa 1 bis 3 mm geschoren. Hierbei ergibt sich der weitere wirtschaftliche Vorteil, daß der durch die hohe Stärke von Grund- und Henkelgarnen bewirkte hervorragende Polstand ein sparsames Abscheren ermöglicht und somit zu der wirtschaftlich sehr erwünschten Reduzierung des Scherverlusts, der nach dem Stand der Technik bei etwa 20 bis 30 Gew.-% liegt, beim erfindungsgemäßen Strukturplüsch aber nur 10 bis 15 Gew.-% beträgt, beiträgt.

Durch Einstellung einer niedrigen Polhöhe kann mit dem erfindungsgemäßen Strukturplüsch auch eine Flockgewebe-Optik erzeugt werden.

Die hohe Dichte des Grundmaterials des erfindungsgemäßen Strukturplüsches bringt den weiteren Vorteil, daß es eine erheblich verringerte Durchdringbarkeit für Formmassen hat und daher mit besonderem Vorteil bei Formgebungsverfahren, die mit einem direkten Hinterspritzen oder Hinterschäumen arbeiten, in vielen Fällen ohne die sonst erforderliche durchdringungssperrende Unterkaschierung eingesetzt werden kann.

Wie oben ausgeführt, wird der Rücken der erfindungsgemäßen Polware aus einem Multifilament-Hybridgarn hergestellt, das höherschmelzende (A) und niedrigerschmelzende Filamente (B) aufweist, wobei die Schmelzpunkte einen bestimmten, verfahrenstechnisch bedingten Mindestabstand haben müssen, und die Filamente A texturiert sind. Diese Merkmale sind notwendig aber auch ausreichend, um der erfindungsgemäßen Polware und dem sie tragenden Rücken die Verformbarkeit und die Fähigkeit zur Thermoverfestigung zu vermitteln.

Für die Filamente A des Multifilament-Hybridgarns gilt, daß sie oberhalb 180C, vorzugsweise über 220°C, insbesondere über 250°C schmelzen sollen. Sie können im Prinzip aus allen spinnfähigen Materialien bestehen, die diese Voraussetzungen erfüllen. Geeignet sind daher sowohl halbsynthetische Materialien, wie z.B. Filamente aus regenerierter Zellulose oder Zelluloseacetat, als auch synthetische Filamente, die wegen der Möglichkeit, ihre mechanischen und chemischen Eigenschaften in weitem Bereich zu variieren, besonders bevorzugt sind.

So können prinzipiell Filamente A aus Hochleistungspolymeren bestehen, wie z.B. aus Polymeren, die ohne oder mit nur geringer Verstreckung, ggf. nach einer dem Spinnvorgang nachgeschalteten Wärmebehandlung, Filamente mit sehr hohem Anfangsmodul und sehr hoher Reißfestigkeit (= feinheitsbezogener Höchstzugkraft) liefern. Solche Filamente sind eingehend beschrieben in Ullmann's Encyclopedia of Industrial Chemistry, 5.Auflage (1989), Band A13, Seiten 1 bis 21 sowie Band 21, Seiten 449 bis 456. Sie bestehen beispielsweise aus flüssigkristallinen Polyestern (LPC), Polybenzimidazol (PBI), Polyetherketon (PEK), Polyetheretherketon (PEEK), Polyetherimiden (PEI), Polyethersulfon (PESU), Aramiden wie Poly-(m-phenylenisophthalamid)(PMIA), Poly-(m-phenylen-terephthalamid)(PMTA), oder

Skechers EX1013-p. 216
Skechers v Nike

Poly(phenylensulfid)(PPS).

In der Regel ist jedoch der Einsatz derartiger Hochleistungsfasern nicht erforderlich und im Hinblick auf die Anforderungen an die Festigkeit des Rückenmaterials der erfindungsgemäßen Polware auch nicht zweckmäßig.

Zweckmäßigerweise bestehen daher die Filamente A aus regenerierter oder modifizierter Zellulose, höherschmelzenden Polyamiden (PA), wie z.B. 6-PA oder 6,6-PA, Polyvinylalkohol, Polyacrylnitril, Modacrylpolymeren, Polycarbonat, insbesondere aber aus Polyestern. Polyester eignen sich insbesondere deshalb als Rohstoff für die Filamente A weil es möglich ist, auf relativ einfache Weise durch Modifikation der Polyesterkette die chemischen, mechanischen und sonstigen physikalischen anwendungsrelevanten Eigenschaften, insbesondere z.B. den Schmelzpunkt zu variieren.

Als Polymermaterial, aus denen die niedriger schmelzenden Filamente (B) bestehen, kommen ebenfalls zweckmäßigerweise spinnfähige Polymere in Betracht wie z.B. Vinylpolymere wie Polyolefine, wie Polyethylen oder Polypropylen, Polybuten, niedriger schmelzende Polyamide, wie z.B. 11-PA oder alicyclische Polyamide (z.B. das durch Kondensation von 4,4'-Diaminodicyclohexylmethan und Decancarbonsäre erhältliche Produkt), insbesondere aber auch hier modifizierte Polyester mit erniedrigtem Schmelzpunkt

Die Polgarne bestimmen weitgehend den textilen Charakter der erfindungsgemäßen Polware. Sie können aus allen üblicherweise zur Herstellung des Pols von Polwaren, z.B. von Plüschen, eingesetzten Faser- und Filamentmaterialien bestehen. So können die Polgarne aus Spinnfasern aus natürlichen Fasermaterialien, wie z.B. Baumwolle oder Wolle, bestehen oder aus halbsynthetischen Fasermaterialien, oder auch aus Synthesefasern und -filamenten. Auch Mischungen von natürlichen und synthetischen Fasern können im Polgarn vorliegen, wenn dies den Anforderungen des Endverbrauchers gerecht wird.

Die Polgarne sind in der Regel gefärbt, z.B. spinngefärbt, und es werden häufig Garne verschiedener Färbungen verarbeitet um bestimmte Dekorative Effekte zu erzielen.

Vorzugsweise sind die Polgarne texturiert.

Wie oben bereits dargelegt, ist es besonders zweckmäßig, daß die höherschmelzenden texturierten Filamente A Polyesterfilamente sind, und daß es dann besonders vorteilhaft ist, wenn auch die niedrigerschmelzenden Filamente B aus modifiziertem Polyester mit erniedrigtem Schmelzpunkt bestehen.

In einer bevorzugten Ausführungsform der vorliegenden Erfindung besteht das Polgarn aus der gleichen Polymerklasse wie die Rückengarne. Es ist besonders bevorzugt, daß das Polgarn ein Polyestergarn ist.

Bevorzugt ist es, daß alle im Polgarn enthaltenen Filamente einen Schmelzpunkt haben, der mindestens 20°C, vorzugsweise mindestens 40°C insbesondere mindestens 80°C über dem Schmelzpunkt der Filamente B des Multifilament-Hybridgarns liegt. Wird diese Bedingung nicht erfüllt, so kann sich der Pol bei der thermischen Verfestigung des Rückens mitverfestigen und versteifen und damit seinen textilen Charakter einbüßen, es sei denn, daß die Thermofixierung des Rückens so ausgeführt wird, daß nur der Rücken die zur Verfestigung nötige Temperatur annimmt, z.B. durch eine Kontaktheizung des Rückens.

Wenn die Rückengarne und das Polgarn im wesentlichen aus der gleichen Polymerklasse besteht, ergeben sich erhebliche Vorteile bei der Entsorgung des gebrauchten Materials. Ein derartiges sortenreines Produkt kann nämlich auf besonders einfache Weise recyclisiert werden, z.B. durch einfaches Aufschmelzen und Regranulieren.

Sofern das Polymermaterial von Rücken und Pol Polyester ist, besteht darüberhinaus die Möglichkeit aus den gebrauchten Produkten z.B. durch Alkoholyse wertvolle Rohmaterialien zur erneuten Herstellung von Polyestern zu gewinnen. Polyester im Sinne dieser Erfindung sind auch Copolyester, die aus mehr als einer Sorte von Dicarbonsäureresten und/oder mehr als einer Sorte Diolresten aufgebaut sind.

Ein Polyester, aus dem die Fasermaterialien der erfindungsgemäßen Polware hergestellt sind, besteht zu mindestens 70 Mol.-%, bezogen auf die Gesamtheit aller Polyesterbaugruppen, aus Baugruppen, die sich von aromatischen Dicarbonsäuren und von aliphatischen Diolen ableiten, und

zu maximal 30 Mol%, bezogen auf die Gesamtheit aller Polyesterbaugruppen, aus Dicarbonsäure-Baugruppen, die von den aromatischen Dicarbonsäure-Baugruppen, die den überwiegenden Teil der Dicarbonsäure-Baugruppen bilden, verschieden sind oder sich von araliphatischen Dicarbonsäuren mit einem oder mehreren, vorzugsweise einem oder zwei kondensierten oder nicht kondensierten aromatischen Kernen, oder von aliphatischen Dicarbonsäuren mit insgesamt 4 bis 12 C-Atomen, vorzugsweise 6 bis 10 C-Atomen ableiten

und Diol-Baugruppen, die sich von verzweigten und/oder längerkettigen Diolen mit 3 bis 10, vorzugsweise 3 bis 6, C-Atomen, oder von cyclischen Diolen, oder von Ethergruppen enthaltenden Diolen, oder, sofern in geringer Menge vorhanden, von Polyglycol mit einem Molgewicht von ca. 500 - 2000 ableiten.

Im Einzelnen ist der Polyester des Kerns, bezogen auf die Gesamtheit aller Polyesterbaugruppen, aus

35 bis 50 Mol-% Baugruppen der Formel $-CO-A^1-CO-$ (I)

0 bis 15 Mol-% Baugruppen der Formel $-CO-A^2-CO-$ (II)

35 bis 50 Mol-% Baugruppen der Formel $-O-D^1-O-$ (III)

0 bis 15 Mol-% Baugruppen der Formel $-O-D^2-O-$ (IV)

und 0 bis 25 Mol.-% Baugruppen der Formel $-O-A^3-CO-$ (V)

aufgebaut, worin

Skechers EX1013-p. 217
Skechers v Nike

A^1 aromatische Reste mit 5 bis 12, vorzugsweise 6 bis 10 C-Atomen

A^2 von A^1 verschiedene aromatische Reste oder araliphatische Reste mit 5 bis 16, vorzugsweise 6 bis 12 C-Atomen oder aliphatische Reste mit 2 bis 10 Kohlenstoffatomen, vorzugsweise 4 bis 8 Kohlenstoffatomen,

A^3 aromatische Reste mit 5 bis 12, vorzugsweise 6 bis 10 C-Atomen


D^1 Alkylen- oder Polymethylengruppen mit 2 bis 4 Kohlenstoffatomen oder Cycloalkan- oder Dimethylen-cycloalkangruppen mit 6 bis 10 C-Atomen,

D^2 von D^1 verschiedene Alkylen- oder Polymethylengruppen mit 3 bis 4 Kohlenstoffatomen oder Cycloalkan- oder Dimethylencycloalkangruppen mit 6 bis 10 C-Atomen oder geradkettige oder verzweigte Alkandiyl-Gruppen mit 4 bis 16, vorzugsweise 4 bis 8, C-Atomen oder Reste der Formel $-(C_2H_4\text{-}O)_m\text{-}C_2H_4-$, worin m eine ganze Zahl von 1 bis 40 bedeutet, wobei m = 1 oder 2 für Anteile bis zu 20 Mol.-% bevorzugt sind und Gruppen mit m = 10 bis 40 vorzugsweise nur in Anteilen von unter 5 Mol.-% vorhanden sind, bedeuten,

wobei die Anteile der Grundbausteine I und III und der Modifizierungsbausteine II, IV und V im Rahmen der oben angegebenen Bereiche so gewählt werden, daß sich der gewünschte Schmelzpunkt des Polyesters ergibt.

Die erfindungsgemäße Polware, deren Fasermaterialien aus derartigen Polyestern, insbesondere aus Polyethylenterephthalat, bestehen, sind nicht leicht zu entflammen.

Die Schwerentflammbarkeit kann noch verstärkt werden durch den Einsatz von flammhemmend modifizierten Polyestern. Derartige flammhemmend modifizierten Polyester sind bekannt. Sie enthalten Zusätze von Halogenverbindungen, insbesondere Bromverbindungen, oder, was besonders vorteilhaft ist, sie enthalten Phosphorverbindungen, die in die Polyesterkette einkondensiert sind. Besonders bevorzugte, flammhemmende erfindungsgemäße Polwaren enthalten in Rücken und/oder Pol Garne aus Polyestern, die in der Kette Baugruppen der Formel



(VI)

worin R Alkylen oder Polymethylen mit 2 bis 6 C-Atomen oder Phenyl und R^1 Alkyl mit 1 bis 6 C-Atomen, Aryl oder Aralkyl bedeutet, einkondensiert enthalten. Vorzugsweise bedeuten in der Formel VI R Ethylen und R^1 Methyl, Ethyl, Phenyl, oder o-, m- oder p-Methyl-phenyl, insbesondere Methyl.

Die Baugruppen der Formel VI sind zweckmäßigerweise in der Polyesterkette zu bis zu 15 Mol%, vorzugsweise zu 1 bis 10 Mol%, enthalten.

Es ist von besonderem Vorteil wenn die eingesetzten Polyester nicht mehr als 60 mVal/kg, vorzugsweise weniger als 30 mVal/kg, verkappte Carboxylendgruppen und weniger als 5 mVal/kg, vorzugsweise weniger als 2 mVal/kg, insbesondere weniger als 1,5 mVal/kg, freie Carboxylendgruppen aufweist.
Vorzugsweise weist daher der Polyester z. B. durch Umsetzung mit Mono-, Bis- und/oder Polycarbodiimiden verkappte Carboxylendgruppen auf.
In einer weiteren, im Hinblick auf eine auch über längere Zeiträume anhaltende Hydrolysestabilität weist der Polyester des Kerns und der Polyester der Polyestermischung des Mantels maximal 200 ppm, vorzugsweise maximal 50 ppm, insbesondere 0 bis 20 ppm, Mono- und/oder Biscarbodiimide und 0,02 bis 0,6 Gew.-%, vorzugsweise 0,05 bis 0,5 Gew.-% freies Polycarbodiimid mit einem mittleren Molekulargewicht von 2000 bis 15000, vorzugsweise von 5000 bis 10000 auf. Die Polyester der in der erfindungsgemäßen Polware enthaltenen Garne können außer den Polymer-Materialien bis zu 10 Gew% von nicht-polymeren Stoffen, wie Modifizierungszusätzen, Füllmitteln, Mattierungsmitteln, Farbpigmenten, Farbstoffen, Stabilisatoren, wie UV-Absorbern, Antioxydantien, Hydrolyse-, Licht- und Temperatur-Stabilisatoren und/oder Verarbeitungshilfsmitteln enthalten.

Ein Gegenstand der Erfindung sind auch die verfestigten oben beschriebenen Polwaren, d.h. solche, bei denen die niedriger schmelzenden Filamente B des Multifilament-Hybridgarns des textilen Rückens zumindest partiell eine Matrix bilden, die die höherschmelzenden texturierten Filamente des Multifilament-Hybridgarns untereinander und mit dem Polgarn im Bereich der Rückenebene miteinander verbindet.

Ein besonderes Charakteristikum dieses Materials ist, daß nicht nur der Rücken durch zumindest partielle Matrixbildung der Filamente B des Multifilament-Hybridgarns des Rückens verfestigt ist sondern daß überraschenderweise die Festigkeit der Einbindung des Polgarns in den Rücken höher ist als dessen Höchstzugkraft.

Ein weiterer Gegenstand der vorliegenden Erfindung ist ein Multifilament-Hybridgarn bestehend aus mindestens 2 Sorten A und B von Filamenten und ggf. Begleitfilamenten C, dadurch gekennzeichnet, daß

Skechers EX1013-p. 218
Skechers v Nike

die Filamente A texturiert sind und einen Schmelzpunkt über 180°C, vorzugsweise über 220°C insbesondere über 250°C haben,

die Filamente B glatt sind und einen Schmelzpunkt unter 220°C, vorzugsweise unter 200°C, insbesondere unter 180°C haben,

der Schmelzpunkt der Filamente B mindestens 20°C, vorzugsweise mindestens 40°C, insbesondere mindestens 80°C unter dem Schmelzpunkt der Filamente A liegt, und
das Gewichtsverhältnis der Filamente A:B im Bereich von 20:80 bis 80:20, vorzugsweise von 40:60 bis 60:40 liegt und das Multifilament-Hybridgarn noch bis zu 40 Gew.-% Begleitfilamente C enthält.

Ein weiterer Gegenstand der vorliegenden Erfindung ist ein Verfahren zur Herstellung einer thermisch zu verfestigenden Polware aus einem textilen Rücken aus Maschenware oder Gewebe und darin eingebundenen henkelbildenden Polgarnen, durch Weben, Wirken oder Stricken eines Gewebes, eines Gewirkes oder eines Gestricks mit eingebundenen Henkeln oder durch Weben, Wirken oder Stricken eines Doppelgewebes, Doppelgewirkes oder Doppelgestricks wobei die beiden textilen Flächen durch Henkelgarne miteinander verbunden sind, und anschließendes Trennen der beiden textilen Flächen derart, daß zwei einbahnige Polgewebe, -gewirke oder gestricke gebildet werden, das dadurch gekennzeichnet ist, daß
das dem Webstuhl, der Wirk- oder der Strickmaschine zur Bildung der textilen Rückenflächen der Polware zugeführte Garn zu mindestens 30 %, vorzugsweise mindestens 75 % ein Multifilament-Hybridgarn ist, bestehend aus mindestens 2 Sorten A und B von Filamenten und ggf. Begleitfilamenten C besteht, wobei

die Filamente A texturiert sind und einen Schmelzpunkt über 180°C, vorzugsweise über 220°C insbesondere über 250°C haben,

die Filamente B einen Schmelzpunkt unter 220°C, vorzugsweise unter 200°C, insbesondere unter 180°C haben,

der Schmelzpunkt der Filamente B mindestens 20°C, vorzugsweise mindestens 40°C, insbesondere mindestens 80°C unter dem Schmelzpunkt der Filamente A liegt, und
das Gewichtsverhältnis der Filamente A:B im Bereich von 20:80 bis 80:20, vorzugsweise von 40:60 bis 60:40 liegt und das Multifilament-Hybridgarn noch bis zu 40 Gew.-% Begleitfilamente C enthält.

Anschließend kann das erhaltene Polgewebe, -gewirke oder gestrick einer verfestigenden Wärmebehandlung, die ebenfalls ein, ggf. integraler, Teil des erfindungsgemäßen Verfahrens ist, unterzogen werden bei einer Temperatur, bei der die niediger schmelzenden Filamente B des Multifilament-Hybridgarns erweichen. Auch die so hergestellte verfestigte Polware ist Gegenstand der vorliegenden Erfindung.

Die Temperatur der abschließenden Wärmebehandlung und die Behandlungsdauer richten sich nach dem gewünschten Grad der Verfestigung und dem Schmelzpunkt der Filamente B des Multifilament-Hybridgarns.
In der Regel wird die Wärmebehandlung bei 100 bis 200°C, vorzugsweise bei 120 bis 180°C ausgeführt.

In der Praxis hat es sich als sehr vorteilhaft erwiesen, die Rohware des hergestellten Polgewebes, -gewirkes oder -gestricks durch eine Wärmebehandlung bei relativ niedriger Temperatur, z.B. durch Dämpfen, auf dem Spannrahmen vorzufixieren.
Der Rohware wird dadurch die Aufrollneigung genommen, sie wird gängiger für die weiteren Verarbeitungsschritte, der Pol wird besser eingebunden (Henkelstabilisierung) und widersteht damit besser mechanischen Zugbelastungen. Ein besonderer Vorteil, der mit der Vorfixierung verbunden ist, besteht darin, daß keine Kaschierung zur Erzwingung der Planlage erforderlich ist und kein oder nur sehr geringer Kantenverschnitt entsteht.

Es ist daher bevorzugt, daß die Rohware des hergestellten Polgewebes, -gewirkes oder -gestricks auf dem Spannrahmen vorfixiert wird.
Vorzugsweise werden zur Bildung des RückensMultifilament-Hybridgarne eingesetzt deren Filamente B glatt sind.

Weiterhin wird entsprechend den Anforderungen der Anwendungspraxis das Verfahren so gesteuert, daß das Flächengewicht der Polware 100 bis 1000 g/m^2, vorzugsweise 200 bis 500 g/m^2 beträgt und das Einlaufverhältnis von Rückengarn zu Polgarn im Bereich von 20:80 bis 40:60 liegt.

Die Steuerung erfolgt je nach gemünschter Poldichte und -musterung so, daß bei einem Rücken aus Maschenware mindestens 30 %, vorzugsweise 60 bis 100 % der Maschen Polgarne aufweisen, bei einem Rückengewebe 30 %, vorzugsweise 60 bis 100 % der Kett-und/oder Schußfäden Polnoppen einbinden.

Die Herstellung des bevorzugten erfindungsgemäßen, gestrickten Strukturplüsches erfolgt durch Verstricken eines Grund- und eines Henkelgarns, Ausrüsten des Gestricks und Scheren des Pols, und ist dadurch gekennzeichnet, daß für die Bildung des Rückens ein oben beschriebenes Multifilament-Hybridgarn eingesetzt wird und das Stricken auf Strickmaschinen mit systemweise getrennter Einarbeitung von Grund- und Henkelgarnen und jacquardmäßiger Nadelauswahl und einer Maschinenteilung von 18, 20 oder 24 Nadeln pro inch, vorzugsweise 18 oder 20 Nadeln/inch, ausgeführt wird, wobei als Henkelgarne Polyester-Filamentgarne eingesetzt werden, die, bezogen auf eine Maschinenteilung von 18 oder 20, einen Gesamttiter von 300 - 400 dtex, vorzugsweise 345 - 360 dtex, haben, daß Grundgarne eingesetzt werden, die, bezogen auf eine Maschinenteilung von 18 oder 20 Nadeln/inch einen Gesamttiter

Skechers EX1013-p. 219
Skechers v Nike

von 300 bis 370 dtex, vorzugsweise 320 - 350 dtex, haben, daß die Einzeltiter der Filamente größer als 1,5 dtex, vorzugsweise größer als 2,5 dtex sind, und daß auf ein Flächengewicht von etwa 350 bis 550 g/m^2 gestrickt wird.
Die so erhaltene erfindungsgemäße, durch eine Wärmebehandlung zu verfestigende Polware, kann durch die oben beschriebene Wärmebehandlung in eine erfindungsgemäße verfestigte Polware überführt werden.

Die Garnauswahl und die Auswahl der Einzeltiter der Grund- und Henkelgarne erfolgt nach den oben angegebenen Kriterien.

Der Henkelanteil wird beim erfindungsgemäßen Strukturplüsch in Abhängigkeit vom Dessign auf 40-70 % eingestellt und liegt damit deutlich unter dem Henkelanteil bekannter Plüsche.

Sowohl über jacquardmäßige Auswahl als auch durch Henkel-Leerreihen können gezielt spezielle Dessigns erzeugt werden. Beispielsweise können auf 1 bis 5 Henkelreihen eine oder zwei Reihen ohne Henkel folgen.

Auch Muster mit gewebeähnlichem Charakter und Dessigns, die längslaufende, querlaufende und/oder diagonallaufende Gassen aufweisen, lassen sich auf diese Weise herstellen.

Die Musterauswahl erfolgt überwiegend nach ästhetischen Gesichtspunkten. Wie weiter oben bereits dargelegt, lassen sich auch typische gewebevelourähnliche Oberflächen einstellen.

Der optische Eindruck der Strukturplüsche wird durch geeignete Farbwahl in Grund und Henkelgarn stark beeinflußt; Farbkontraste betonen den Strukturcharakter, insbesondere wenn Grund- und Henkelgarn Kontrastfarben aufweisen.

Die Ausrüstung dieses Strukturplüsches gemäß Erfindung erfolgt in an sich bekannter Weise so, daß ein sauberer Pol und eine kontrastreiche Optik entsteht.

Die vorliegende Erfindung betrifft auch ein Verfahren zur Herstellung eines Multifilament-Hybridgarns durch Mischen von mindestens zwei Garnen A und B und ggf. weiteren Begleitgarnen C und anschließende Durchführung einer Fadenschluß-Operation dadurch gekennzeichnet, daß

die Filamente A texturiert sind und einen Schmelzpunkt über 180°C, vorzugsweise über 220°C insbesondere über 250°C haben,

die Filamente B einen Schmelzpunkt unter 220°C, vorzugsweise unter 200°C, insbesondere unter 180°C haben,

der Schmelzpunkt der Filamente B mindestens 20°C, vorzugsweise mindestens 40°C, insbesondere mindestens 80°C unter dem Schmelzpunkt der Filamente A liegt, und
das Gewichtsverhältnis der Filamente A:B im Bereich von 20:80 bis 80:20, vorzugsweise von 40:60 bis 60:40 liegt und das Multifilament-Hybridgarn noch bis zu 40 Gew.-% Begleitfilamente C enthält.

Vorzugsweise erfolgt die Fadenschlußoperation durch Luftdüsenverwirbelung. Weiterhin ist es bevorzugt, daß bei der Herstellung des Multifilament-Hybridgarns keine Begleitfilamente C eingesetzt werden.

Die erfindungsgemäße Polware ist in der bevorzugten Ausführungsform sortenrein und weist daher die oben bereits beschriebenen Vorteile bei der Entsorgung bzw. Recyclisierung auf. Darüberhinaus ergeben sich durch die vorliegende Erfindung weitere Vorteile, nämlich die Einsparung einer Kaschierung vor der Weiterverarbeitung, die Möglichkeit den Rücken soweit zu versteifen und dabei zu verdichten, daß ein direktes Hinterspritzen z.B. mit Formschäumen möglich ist, ohne daß ein Durchschlagen des Schaums auf die Polseite erfolgt. Besonders vorteilhaft ist es, daß die Polware, selbst dann wenn ihr Rücken gewebt ist, eine sehr gute dreidimensionale Verformbarkeit aufweist, die sich aus der Verwendung des beschriebenen Multifilament-Hybridgarns bei der Herstellung des Rückens ergibt.

Die folgenden Ausführungsbeispiele veranschaulichen die Herstellung des erfindungsgemäßen Multifilament-Hybridgarns und dessen Einsatz bei der Herstellung von erfindungsgemäßen unstrukturierten und strukturierten (Strukturplüsch) Polwaren.

Beispiel 1

Herstellung des für den Rücken eingesetzten Grundgarns:

Ein Hybridgarn wird hergestellt durch dubeln eines Garns 110 dtex f 32, spinngefärbt, texturiert, aus unmodifiziertem Polyethylenterephthalat (Rohstoff-Schmelzpunkt 265°C) (®TREVIRA Type 536) mit einem Garn 140 dtex f 24 aus isophthalsäuremodifiziertem Polyethylenterephthalat (Rohstoff-Schmelzpunkt 110 bis 120°C) und gemeinsames Verwirbeln in einer mit einem Luftdruck von 2 bar betriebenen Verwirbelungsdüse, wobei das tiefer schmelzende Garn im wesentlichen glatt bleibt.

Beispiel 2

Auf einer Rundstrickmaschine Type MCPE mit Jacquard-Einrichtung mit 20 Nadeln/inch und 26" Zylinderdurchmesser, und 3,5 mm - Platinen wird ein Gestrick hergestellt. Es wird ein Henkelanteil von 100% eingestellt bei einem Einlaufverhältnis von Henkelgarn/Grundgarn von 75% : 25%.

Skechers EX1013-p. 220
Skechers v Nike

Bindung: Zweifarbig Jacquard, 14 Vollreihen mit Grundgarn, 28 Henkelreihen. Als Grundgarn wird ein gemäß Beschreibung im Beispiel 1 erhaltenes Multifilament-Hybridgarn, als Henkelgarn ein Polyester-Buntgarn ®TREVIRA texturiert, vom Titer 84 f 24 X 2 mit oktalobalem Querschnitt eingesetzt.

Der so erhaltene Strickschlauch wird wie üblich geschnitten zu einer Strickware mit 172 cm Breite und einem Flächengewicht von 380 g/m^2. Die Rohware wird auf einem Spannrahmen bei max. 120°C gedämpft, wobei eine Vorstabilisierung erfolgt. Anschließend wird die Ware geschoren (2 Passagen), gewaschen (Breitwäsche 50°C), bei 150°C auf Rahmen getrocknet und fixiert und fertiggestellt.

Die Fertigware hat eine Warenbreite von 165 cm und ein Flächengewicht von 330g/m^2.

Durch den Einsatz des Multifilament-Hybridgarns ist das sonst übliche Kantenschneiden und -leimen nicht erforderlich, da die Ware einwandfrei flach liegt.

Beispiel 3

Auf einer Rundstrickmaschine mit Jacquard-Einrichtung mit 20 Nadeln/inch und 26" Zylinderdurchmesser, und 3,5 mm - Platinen wird ein Gestrick hergestellt. Es wird ein Henkelanteil von 50% eingestellt bei einem Einlaufverhältnis von Henkelgarn/Grundgarn von 55% : 45%, wobei die Henkel in einem Karomuster von 3 X 6 Maschen gestrickt werden.

Als Grundgarn wird ein analog Beschreibung im Beispiel 1 erhaltenes (Ausgangsgarne sind: Höherschmelzende Type: Multifilamentgarn dtex 220 f 40 aus Polyethylenterephalat, Schmelzpunkt 265°C; Niedrigerschmelzende Type: Multifilamentgarn dtex 140 f 24 aus isophthalsäuremodifiziertem Polyethylenterephthalat, Schmelzpunkt 110°C) Multifilament-Hybridgarn, als Henkelgarn ein Polyestergarn ®TREVIRA texturiert vom Titer 167 f 48 X 2 (oktal) eingesetzt.

Der so erhaltene Strickschlauch wird wie üblich geschnitten zu einer Strickware mit 182 cm Breite und einem Flächengewicht von 489 g/m^2. Die Rohware wird auf einem Spannrahmen bei max. 120°C gedämpft, wobei eine Vorstabilisierung erfolgt. Anschließend wird die Ware geschoren (2 Passagen), gewaschen (Breitwäsche 50°C), bei 150°C auf Rahmen getrocknet und fixiert und fertiggestellt.

Die Fertigware hat eine Warenbreite von 170 cm und ein Flächengewicht von 446g/m^2. Der Scherverlust beträgt 10,4%.

Beispiel 4

Auf einer Rundstrickmaschine mit Jacquard-Einrichtung mit 20 Nadeln/inch und 26" Zylinderdurchmesser, und 3,5 mm - Platinen wird ein Gestrick hergestellt. Es wird ein Henkelanteil von 72% eingestellt bei einem Einlaufverhältnis von Henkelgarn/Grundgarn von 61,5% : 38,5%, wobei für den Henkelanteil ein schräglaufendes Jacquardmuster eingestellt wird.

Als Grundgarn wird ein analog Beschreibung im Beispiel 1 erhaltenes (Ausgangsgarne sind: Höherschmelzende Type: Multifilamentgarn dtex 220 f 40 aus Polyethylenterephalat, Schmelzpunkt 265°C; Niedrigerschmelzende Type: Multifilamentgarn dtex 140 f 24 aus isophthalsäuremodifiziertem Polyethylenterephthalat, Schmelzpunkt 110°C) Multifilament-Hybridgarn, als Henkelgarn ein Polyestergarn ®TREVIRA Velours, PMC vom Titer 110 f 32 X 3 eingesetzt.

Die Rohware wird auf einem Spannrahmen bei max. 120°C gedämpft, wobei eine Vorstabilisierung erfolgt. Anschließend wird die Ware geschoren (2 Passagen), gewaschen (Breitwäsche 50°C), bei 150°C auf Rahmen getrocknet und fixiert und fertiggestellt.

Die Fertigware hat ein Flächengewicht von 435g/m^2. Der Scherverlust beträgt 13,3%.

Beispiel 5

Auf einer Rundstrickmaschine mit Jacquard-Einrichtung mit 20 Nadeln/inch und 26" Zylinderdurchmesser, und 3,5 mm - Platinen wird ein Gestrick hergestellt. Es wird ein Henkelanteil von 50% eingestellt bei einem Einlaufverhältnis von Henkelgarn/Grundgarn von 58% : 42%, wobei die Henkel in einem Karomuster von 3 X 6 Maschen gestrickt werden.

Als Grundgarn wird ein analog Beschreibung im Beispiel 1 erhaltenes (Ausgangsgarne sind: Höherschmelzende Type: Multifilamentgarn dtex 220 f 40 aus Polyethylenterephalat, Schmelzpunkt 265°C; Niedrigerschmelzende Type: Multifilamentgarn dtex 140 f 24 aus isophthalsäuremodifiziertem Polyethylenterephthalat, Schmelzpunkt 110°C) Multifilament-Hybridgarn, als Henkelgarn ein Polyestergarn ®TREVIRA Jet-Tex vom Titer 365 f 128 eingesetzt.

Der so erhaltene Strickschlauch wird wie üblich geschnitten zu einer Strickware mit 180 cm Breite und einem Flächengewicht von 518 g/m^2. Die Rohware wird auf einem Spannrahmen bei max. 120°C gedämpft, wobei eine Vorstabilisierung erfolgt. Anschließend wird die Ware geschoren (2 Passagen), gewaschen (Breitwäsche 50°C), bei 150°C auf Rahmen getrocknet und fixiert und fertiggestellt.

Die Fertigware hat eine Warenbreite von 170 cm und ein Flächengewicht von 506g/m^2. Der Scherverlust beträgt 11,4%.

Skechers EX1013-p. 221
Skechers v Nike

Patentansprüche

1. Polware aus einem textilen Rücken aus Maschenware oder Gewebe und darin eingebundenen henkelbildenden Polgarnen, dessen textiler Rücken aus einem Multifilament-Hybridgarn aus mindestens 2 Sorten A und B von Filamenten und ggf. Begleitfilamenten C besteht, dadurch gekennzeichnet, daß
die Filamente A
texturiert sind und einen Schmelzpunkt über 180°C haben,
die Filamente B
einen Schmelzpunkt unter 220°C haben,
der Schmelzpunkt der Filamente B mindestens 20°C unter dem Schmelzpunkt der Filamente A liegt, und
das Gewichtsverhältnis der Filamente A:B im Bereich von 20:80 bis 80:20 liegt und das Multifilament-Hybridgarn noch bis zu 40 Gew.-% Begleitfilamente C enthält.

2. Polware gemäß Anspruch 1, dadurch gekennzeichnet, daß sie dreidimensional verformbar ist.

3. Polware gemäß mindestens einem der Ansprüche 1 und 2, dadurch gekennzeichnet, daß die höher schmelzenden texturierten Filamente A des Multifilament-Hybridgarns eine Einkräuselung von 3 bis 50 %, vorzugsweise von 8 bis 30 % aufweisen.

4. Polware gemäß mindestens einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß ihr Rücken durch eine Wärmebehandlung verfestigt werden kann.

5. Polware gemäß mindestens einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß die Filamente A des Multifilament-Hybridgarns einen Schmelzpunkt von 220 bis 300°C, vorzugsweise von 240-280°C haben.

6. Polware gemäß mindestens einem der Ansprüche 1 bis 5, dadurch gekennzeichnet, daß die Filamente B des Multifilament-Hybridgarns einen Schmelzpunkt von 110 bis 220°C, vorzugsweise von 150 bis 200°C haben.

7. Polware gemäß mindestens einem der Ansprüche 1 bis 6, dadurch gekennzeichnet, daß zwischen den Filamente A und B des Multifilament-Hybridgarns und ggf. C Fadenschluß besteht.

8. Polware gemäß mindestens einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß das Multifilament-Hybridgarn keine Begleitfilamente C aufweist.

9. Polware gemäß mindestens einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß das Multifilament-Hybridgarn einen Gesamttiter von 80 bis 500 dtex, vorzugsweise 100 bis 400 dtex, insbesondere 160 bis 320 dtex, hat, und die höher schmelzenden texturierten Filamente A des Multifilament-Hybridgarns einen Einzelfilament-Titer von 0,5 bis 15 dtex, vorzugsweise von 2 bis 10 dtex, und die niedriger schmelzenden Filamente B des Multifilament-Hybridgarns einen Einzelfilament-Titer von 1 bis 20 dtex, vorzugsweise von 3 bis 15 dtex, haben.

10. Polware gemäß mindestens einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die höherschmelzenden texturierten Filamente A des Multifilament-Hybridgarns gefärbt sind.

11. Polware gemäß mindestens einem der Ansprüche 1 bis 10, dadurch gekennzeichnet, daß ihr Flächengewicht 100 bis 1000 g/m2, vorzugsweise 200 bis 500 g/m2 beträgt.

12. Polware gemäß mindestens einem der Ansprüche 1 bis 11, dadurch gekennzeichnet, daß das Gewichtsverhältnis von textilem Rücken zu Polgarn in der Rohware im Bereich von 20:80 bis 40:60 liegt.

13. Polware gemäß mindestens einem der Ansprüche 1 bis 12, dadurch gekennzeichnet, daß der Gesamttiter des Polgarns 50 bis 800 dtex, vorzugsweise 100 bis 400 dtex beträgt.

14. Polware gemäß mindestens einem der Ansprüche 1 bis 13, dadurch gekennzeichnet, daß der Einzelfilament-Titer des Polgarns 0,5 bis 10 dtex, vorzugsweise 0,7 bis 6 dtex, beträgt.

15. Polware gemäß mindestens einem der Ansprüche 1 bis 14, dadurch gekennzeichnet, daß Rückengarne und Polgarn aus der gleichen Polymerklasse, vorzugsweise aus Polyestern, bestehen.

Skechers EX1013-p. 222
Skechers v Nike

16. Polware gemäß mindestens einem der Ansprüche 1 bis 15, dadurch gekennzeichnet, daß alle im Polgarn enthaltenen Filamente einen Schmelzpunkt haben, der mindestens 20°C, vorzugsweise mindestens 40°C insbesondere mindestens 80°C über dem Schmelzpunkt der Filamente B des Multifilament-Hybridgarns liegt.

17. Polware gemäß mindestens einem der Ansprüche 1 bis 16, dadurch gekennzeichnet, daß der Pol aus geschnittenen Polgarn-Enden besteht.

18. Polware gemäß mindestens einem der Ansprüche 1 bis 17, dadurch gekennzeichnet, daß mindestens 30 %, vorzugsweise 60 bis 100 % der Maschen bzw der Kett-und/oder Schußfäden Polgarne einbinden.


19. Polware gemäß mindestens einem der Ansprüche 1 bis 18, dadurch gekennzeichnet, daß sie einen gestrickten Rücken und Strukturdekor aufweist und daß sie als Henkelgarne Filamentgarne aufweist, die, bezogen auf eine Maschinenteilung von 18 oder 20 Nadeln pro inch, einen Gesamttiter von 300 - 400 dtex haben, dessen Grundgarn, bezogen auf eine Maschinenteilung von 18 oder 20 Nadeln pro inch einen Gesamttiter von 300 bis 370 dtex hat, wobei die Einzeltiter der Filamente größer als 1,5 dtex sind, dessen Flächengewicht etwa 350 bis 550 g/m^2 beträgt, und dessen Grundmaschen in Strukturzonen kein Henkelgarn enthalten.

20. Polware gemäß mindestens einem der Ansprüche 1 bis 19, dadurch gekennzeichnet, daß Garne aus Profilfilamenten mit ovalem, hantelförmigem oder bändchenförmigem Querschnitt, der auch noch eine oder mehrere Einschnürungen aufweisen kann, oder Dreikant-, Dreilapp (trilobal)- und besonders Achtlapp (oktolobal)- Profile eingesetzt werden.

21. Polware gemäß mindestens einem der Ansprüche 1 bis 20, dadurch gekennzeichnet, daß der Henkelanteil bei etwa 40 bis 73 Prozent liegt.

22. Polware gemäß mindestens einem der Ansprüche 15 bis 21, dadurch gekennzeichnet, daß der Polyester zu mindestens 70 Mol.-%, bezogen auf die Gesamtheit aller Polyesterbaugruppen, aus Baugruppen, die sich von aromatischen Dicarbonsäuren und von aliphatischen Diolen ableiten, und zu maximal 30 Mol%, bezogen auf die Gesamtheit aller Polyesterbaugruppen, aus Dicarbonsäure-Baugruppen, die von den aromatischen Dicarbonsäure-Baugruppen, die den überwiegenden Teil der Dicarbonsäure-Baugruppen bilden, verschieden sind oder sich von araliphatischen Dicarbonsäuren mit einem oder mehreren, vorzugsweise einem oder zwei kondensierten oder nicht kondensierten aromatischen Kernen, oder von cyclischen oder acyclischen aliphatischen Dicarbonsäuren mit insgesamt 4 bis 12 C-Atomen, vorzugsweise 6 bis 10 C-Atomen ableiten und Diol-Baugruppen, die sich von verzweigten und/oder längerkettigen Diolen mit 3 bis 10, vorzugsweise 3 bis 6, C-Atomen, oder von cyclischen Diolen, oder von Ethergruppen enthaltenden Diolen, oder, sofern in geringer Menge vorhanden, von Polyglycol mit einem Molgewicht von ca. 500 - 2000 ableiten, besteht.

23. Polware gemäß mindestens einem der Ansprüche 1 bis 22, dadurch gekennzeichnet, daß der Polyester Baugruppen der Formel VI enthält,



(VI)

worin R Alkylen oder Polymethylen mit 2 bis 6 C-Atomen oder Phenyl, vorzugsweise Ethylen, und R^1 Alkyl mit 1 bis 6 C-Atomen, Aryl oder Aralkyl, vorzugsweise Methyl, bedeutet, einkondensiert enthalten.

24. Polware gemäß mindestens einem der Ansprüche 1 bis 23, dadurch gekennzeichnet, daß der Rücken durch zumindest partielle Matrixbildung der Filamente B des Multifilament-Hybridgarn des Rückens verfestigt ist.

25. Polware gemäß mindestens einem der Ansprüche 1 bis 24, dadurch gekennzeichnet, daß die Festigkeit der Einbindung des Polgarns in den Rücken höher ist als dessen Höchstzugkraft.

26. Multifilament-Hybridgarn bestehend aus mindestens 2 Sorten A und B von Filamenten und ggf. Begleitfilamenten C, dadurch gekennzeichnet, daß

Skechers EX1013-p. 223
Skechers v Nike

die Filamente A
texturiert sind und einen Schmelzpunkt über 180°C haben,
die Filamente B
glatt sind und einen Schmelzpunkt unter 220°C haben,
der Schmelzpunkt der Filamente B mindestens 20°C unter dem Schmelzpunkt der Filamente A liegt, und
das Gewichtsverhältnis der Filamente A:B im Bereich von 20:80 bis 80:20 liegt und das Multifilament-Hybridgarn noch bis zu 40 Gew.-% Begleitfilamente C enthält.

27. Multifilament-Hybridgarn gemäß Anspruch 26, dadurch gekennzeichnet, daß die höherschmelzenden texturierten Filamente A eine Einkräuselung von 3 bis 50 %, vorzugsweise von 8 bis 30 %, insbesondere von 10 bis 22 % aufweisen.

28. Multifilament-Hybridgarn gemäß mindestens einem der Ansprüche 26 und 27, dadurch gekennzeichnet, daß die Filamente A einen Schmelzpunkt von 220 bis 300°C, vorzugsweise von 240-280°C haben.

29. Multifilament-Hybridgarn gemäß mindestens einem der Ansprüche 26 bis 28, dadurch gekennzeichnet, daß die Filamente B einen Schmelzpunkt von 110 bis 220°C, vorzugsweise von 150 bis 200°C haben.

30. Multifilament-Hybridgarn gemäß mindestens einem der Ansprüche 26 bis 29, dadurch gekennzeichnet, daß zwischen den Filamente A und B und ggf. C Fadenschluß besteht.

31. Multifilament-Hybridgarn gemäß mindestens einem der Ansprüche 26 bis 30, dadurch gekennzeichnet, daß das Multifilament-Hybridgarn keine Begleitfilamente C enthält.

32. Verfahren zur Herstellung einer Polware aus einem textilen Rücken aus Maschenware oder Gewebe und darin eingebundenen henkelbildenden Polgarnen, durch Weben, Wirken oder Stricken eines Gewebes, eines Gewirkes oder eines Gestricks mit eingebundenen Henkeln oder durch Weben, Wirken oder Stricken eines Doppelgewebes, Doppelgewirkes oder Doppelgestricks wobei die beiden textilen Flächen durch Henkelgarne miteinander verbunden sind, und anschließendes Trennen der beiden textilen Flächen derart, daß zwei einbahnige Polgewebe, -gewirke oder gestricke gebildet werden, dadurch gekennzeichnet, daß
das dem Webstuhl, der Wirk- oder der Strickmaschine zur Bildung der textilen Rückenflächen der Polware zugeführte Garn zu mindestens 30 %, vorzugsweise mindestens 75 % ein Multifilament-Hybridgarn ist, bestehend aus mindestens 2 Sorten A und B von Filamenten und ggf. Begleitfilamenten C besteht, wobei
die Filamente A
texturiert sind und einen Schmelzpunkt über 180°C, vorzugsweise über 220°C insbesondere über 250°C haben,
die Filamente B
einen Schmelzpunkt unter 220°C, vorzugsweise unter 200°C, insbesondere unter 180°C haben,
der Schmelzpunkt der Filamente B mindestens 20°C, vorzugsweise mindestens 40°C, insbesondere mindestens 80°C unter dem Schmelzpunkt der Filamente A liegt, und
das Gewichtsverhältnis der Filamente A:B im Bereich von 20:80 bis 80:20, vorzugsweise von 40:60 bis 60:40, liegt und das Multifilament-Hybridgarn noch bis zu 40 Gew.-% Begleitfilamente C enthält.

33. Verfahren gemäß Anspruch 32, dadurch gekennzeichnet, daß das erhaltene Polgewebe, -gewirke oder gestrick einer verfestigenden Wärmebehandlung unterzogen wird bei einer Temperatur, bei der die niediger schmelzenden Filamente B des Multifilament-Hybridgarns erweichen.

34. Verfahren gemäß mindestens einem der Ansprüche 32 und 33, dadurch gekennzeichnet, daß die Wärmebehandlung bei 100 bis 200°C ausgeführt wird.

35. Verfahren gemäß mindestens einem der Ansprüche 32 bis 34, dadurch gekennzeichnet, daß die Rohware des hergestellten Polgewebes, -gewirkes oder -gestricks auf dem Spannrahmen vorfixiert wird.

36. Verfahren gemäß mindestens einem der Ansprüche 32 bis 35, dadurch gekennzeichnet, daß der Rücken gestrickt ist und das Stricken auf Strickmaschinen mit systemweise getrennter Einarbeitung von Grund- und Henkelgarnen und jacquardmäßiger Nadelauswahl und einer Maschinenteilung von 18, 20 oder 24 Nadeln pro inch ausgeführt wird, wobei als Henkelgarne Polyester-Filamentgarne eingesetzt werden, die, bezogen auf eine Maschinenteilung von 18 oder 20, einen Gesamttiter von 300 - 400 dtex haben, daß Grundgarne eingesetzt werden, die, bezogen auf eine Maschinenteilung von 18 oder 20 Nadeln/inch einen Gesamttiter von 300 bis 370 dtex haben, daß die Einzel-

Skechers EX1013-p. 224
Skechers v Nike

titer der Filamente größer als 1,5 dtex sind, und daß auf ein Flächengewicht von etwa 350 bis 550 g/m^2 gestrickt wird.

37. Verfahren zur Herstellung eines Multifilament-Hybridgarns durch Vereinigen und Mischen eines höherschmelzenden (A) und eines niedriger schmelzenden (B) Filamentgarns dadurch gekennzeichnet, daß die Garne A und B einer Verwirbelungsdüse zugeführt werden, wobei ein Garn A eingesetzt wird dessen Filamente texturiert sind und einen Schmelzpunkt über 180°C haben,
ein Garn B eingesetzt wird dessen Filamente glatt sind und einen
Schmelzpunkt unter 220°C haben, wobei
der Schmelzpunkt der Filamente B mindestens 20°C unter dem
Schmelzpunkt der Filamente A liegt, und
die Filamente A und B im Gewichtsverhältnis A:B im Bereich von 20:80 bis 80:20 zugeführt werden und noch bis zu 40 Gew.-% Begleitfilamente C zugeführt werden.

38. Verfahren gemäß Anspruch 37, dadurch gekennzeichnet, daß die Fadenschlußoperation in einer Luftdüsenverwirbelung besteht.

39. Verfahren gemäß mindestens einem der Ansprüche 37 und 38, dadurch gekennzeichnet, daß keine Begleitfilamente C eingesetzt werden.

40. Verwendung der Polware des Anspruchs 1 zur textilen Innenraumgestaltung

41. Verwendung gemäß Anspruch 40 zur Herstellung von Sitzbezügen und Sitzen.

42. Verwendung gemäß mindestens einem der Ansprüche 40 und 41 zur Herstellung von Innenauskleidungen und zur Innenauskleidung.

43. Verwendung gemäß mindestens einem der Ansprüche 40 bis 42 im Fahrzeugbau.

Skechers EX1013-p. 225
Skechers v Nike

Europäisches Patentamt

EUROPÄISCHER RECHERCHENBERICHT

Nummer der Anmeldung
EP 96 10 1888

EINSCHLÄGIGE DOKUMENTE

Kategorie	Kennzeichnung des Dokuments mit Angabe, soweit erforderlich, der maßgeblichen Teile	Betrifft Anspruch	KLASSIFIKATION DER ANMELDUNG (Int.Cl.6)
A	PATENT ABSTRACTS OF JAPAN vol. 14, no. 74 (C-0687), 13.Februar 1990 & JP-A-01 292139 (KURARAY CO LTD), 24.November 1989, * Zusammenfassung * ---	1,4,6, 32,33	D04B1/04 D03D27/00
A	WO-A-94 20657 (E.I. DU PONT DE NEMOURS & CO) * Seite 5, Zeile 5 - Seite 6, Zeile 22 * ---	1,26, 28-32	
D,A	DE-A-40 42 063 (SCHWARZ) ---		
D,A	DE-A-34 08 769 (BAYER AG) ---		
D,A	EP-A-0 260 872 (AVCO SYNTHETIC TURF PRODUCTION DISTRIBUTION INC.) -----		

RECHERCHIERTE SACHGEBIETE (Int.Cl.6)

D04B
D03D
D02G

Der vorliegende Recherchenbericht wurde für alle Patentansprüche erstellt

Recherchenort	Abschlußdatum der Recherche	Prüfer
DEN HAAG	4.Juni 1996	Van Gelder, P

KATEGORIE DER GENANNTEN DOKUMENTE

X : von besonderer Bedeutung allein betrachtet
Y : von besonderer Bedeutung in Verbindung mit einer anderen Veröffentlichung derselben Kategorie
A : technologischer Hintergrund
O : nichtschriftliche Offenbarung
P : Zwischenliteratur

T : der Erfindung zugrunde liegende Theorien oder Grundsätze
E : älteres Patentdokument, das jedoch erst am oder nach dem Anmeldedatum veröffentlicht worden ist
D : in der Anmeldung angeführtes Dokument
L : aus andern Gründen angeführtes Dokument

& : Mitglied der gleichen Patentfamilie, übereinstimmendes Dokument

EPO FORM 1503 03.82 (P04C03)

Skechers EX1013-p. 226
Skechers v Nike

(19)日本国特許庁（ＪＰ）　(12)**公開特許公報**（Ａ）　(11)特許出願公開番号

特開平8－109553

(43)公開日　平成８年(1996)４月30日

(51)Int.Cl.[6]		識別記号	庁内整理番号	ＦＩ	技術表示箇所
Ｄ０４Ｂ	1/00		Ｃ		
Ａ４３Ｂ	23/02	１０１	Ａ		
Ｂ３２Ｂ	5/24	１０１		9349－4Ｆ	
	5/26			9349－4Ｆ	
	27/02			9349－4Ｆ	

審査請求　未請求　請求項の数８　ＦＤ　(全 10 頁)　最終頁に続く

(21)出願番号　特願平6－264624

(22)出願日　平成６年(1994)10月４日

(71)出願人　594013402
東宝繊維株式会社
東京都葛飾区奥戸４丁目15番７号

(72)発明者　中込　義正
東京都葛飾区奥戸４丁目15番７号東宝繊維株式会社内


(74)代理人　弁理士　山田　正国

(54)【発明の名称】　三層シート用基布及びその製造方法並びに、この三層基布を用いた自動車座席、靴、鞄、袋物など用の三層シート

(57)【要約】

【目的】　三層用のシートの基布がメリヤス編み布であり、しかも一部の編み糸が断線したとしても、編み糸が伝線せず、かつメリヤス生地としての伸縮性と風合いを保つようにしたもので、この基布を及びその製造方法、並びにその基布を用いた自動車座席、靴、鞄袋など用の三層シートを市場に提供する。

【構成】平メリヤス編み布の少なくとも３コース毎に熱可塑性の挿入糸１１が挿入してあって、編み布１３が構成してある。この編み布１３が縦方向に牽引されて、熱セットしてある。このときの熱で相隣るコースの掛合部分であって、前記挿入糸１１を挟持している部分はバインダーとして結合して、前記編み糸が伝線せず、かつメリヤス生地としての伸縮性と風合いを保つようにした。

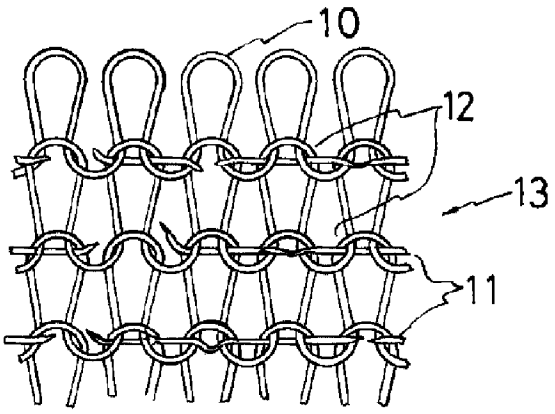

【特許請求の範囲】
【請求項１】合成樹脂製のフィラメントよりなる編み糸により平編みのメリヤスとしてあり、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のフィラメント挿入糸が挿入してあって、この挿入糸は前記上下のコースの編み糸の掛合位置において挟持されて、全体としてクロスインレイの平編みメリヤス布としてあり、これを縦方向に牽引して熱セットしてあって、前記上下のコースの編み糸は挿入糸をバインダーとして前記掛合位置において、それぞれ融着して形成してあることを特徴とする三層シート用基布。
【請求項２】前記挿入糸による前記編み糸の融着は熔融固化した挿入糸の一部が前記編み糸繊維の一部乃至全部を抱持して結合したものであることを特徴とする請求項１記載の三層シート用基布。
【請求項３】前記編み糸は１５デニール乃至１２０デニールであり、フィラメントカウント１乃至３６のポリエステルフィラメントであり、前記挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３６デニールの範囲あることを特徴とする請求項１または請求項１又は請求項２記載の三層シート用基布。
【請求項４】合成樹脂製のフィラメント編み糸により平編みのメリヤスを編成する際に、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のモノフィラメント樹脂よりなる挿入糸を相隣するコースの編み糸が掛合する間に挿入して、コース方向に挿入糸が挿入してあるクロスインレイの平編みメリヤス布を編成する第１工程。前記第１工程で編成された編み布を幅寸法を維持したまま、縦方向に順次牽引しながら、前記挿入糸が塑性変形可能な軟化温度であって、編み糸が塑性変形しない温度まで加熱し、前記相隣するコースの編み糸が掛合する間に挟持されている軟化した挿入糸の一部によってを相圧接する部分前記編み糸の全部乃至前記編み糸繊維の一部を抱持する第２工程。その後編み布を牽引状態のまゝ冷却して、前記挿入糸をその状態で固化させる第３工程。以上の３工程よりなる三層シート用の基布の製造方法。
【請求項５】請求項４の発明の第１工程の編み糸は前記編み糸は１５デニール乃至１２０デニール、フィラメントカウントは１乃至３６のポリエステルフィラメント、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３０デニールの範囲のものを用いる方法であることを特徴とする三層シート用の基布の製造方法。
【請求項６】織布、不織布、編み布、合成樹脂フィルムの一種よりなる表層と、この裏面にウレタン発泡層及び基布が順次積層して一体化してある表皮材に於いて、
前記基布は合成樹脂製のフィラメントよりなる編み糸により平編みのメリヤスとしてあり、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のフィラメント挿入糸が挿入してあって、この挿入糸は前記上下のコースの編み糸の掛合位置において挟持されて、全体としてクロスインレイの平編みメリヤス布としてあり、これを縦方向に牽引して熱セットしてあって、前記上下のコースの編み糸は挿入糸をバインダーとして前記掛合位置において、それぞれ融着して形成してあることを特徴とする自動車座席、靴、鞄、袋物など用三層シート。
【請求項７】前記編み糸は前記編み糸は１５デニール乃至１２０デニール、フィラメントカウントは１乃至３６のポリエステルを用いる方法であり、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３６デニールの範囲であことを特徴とする請求項６記載の自動車座席、靴、袋物など用三層シート。
【請求項８】前記挿入糸による編み糸の融着は熔融固化した挿入糸の一部が編み糸繊維の一部乃至全部を抱持して結合したものであることを特徴とする請求項６、又は請求項７記載の自動車座席、靴、鞄、袋物など用三層シート。
【発明の詳細な説明】
【０００１】
【産業上の利用分野】この発明は、主として家具又は自動車の椅子、靴、鞄、その他の袋物、衣服用の表皮材に係るものであり、殊に、その表皮材が表層と基布の中間に合成樹脂発泡層（通常ポリウレタンフォーム）を有する三層シートに係るものであり、また前記三層シートに用いる基布に関する。
【０００２】
【従来の技術】従来のこの種の表皮材は一般に密な化粧シートであり、一般に中間が合成樹脂発泡層であり、裏面に基布が裏打ちしてある三層シートとなっている。この三層シートの基布としては、捲縮糸を用いたメリヤス、トリコット編布、不織布などを用いているが糸の使用量が多くコストを押し上げている。またモノフィラメントを用いて平編メリヤス編布を用いることも考えられるが、一部の編み糸が破断したとき、簡単に伝線が起こり、使用に耐えない。また全体に糊付け、若しくは合成樹脂エマルジョンを塗布してゲル化した基布も市場には見受けられるが、メリヤスとしての伸縮性乃至風合いが減殺されている。
【０００３】
【発明が解決しようとする課題】そこでこの請求項１乃至４記載の発明は従来のトリコット編布などより遥かに糸乃至繊維の使用量が少なく、しかも一部の繊維が断線したとしても、みだりに伝線せず、メリヤスとしての伸縮性と風合いのある三層シート用の基布を市場に提供することである。請求項２記載の発明の課題とするところは、前記の課題の他、相隣るコースとの掛合位置の編み

糸の結合を強固した前記基布を得るためである。請求項３記載の発明の課題とするところは、前記の課題の他、丈夫で軽量な前記基布を得るためである。

【０００４】請求項４及び５記載の発明の課題とするところは、請求項１、請求項３、又は請求項４記載の発明の物を製造する方法を市場に提供することを目的とする。

【０００５】請求項６、７及び１１記載の発明の課題とするところは、請求項１記載の発明の基布を用いた自動車座席、靴、鞄、袋物など用三層シートを市場に提供することである。

【０００６】請求項８記載の発明の課題とするところは、請求項２又は請求項３記載の発明の基布を用いた自動車座席、靴、鞄、袋物など用三層シートを市場に提供することである。

【０００７】

【課題を解決するための手段】前記の課題を解決するために、この物の発明は合成樹脂製のフィラメントよりなる編み糸により平編みのメリヤスとしてあり、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のフィラメント挿入糸が挿入してあって、この挿入糸は前記上下のコースの前記編み糸の掛合位置において挟持されて、全体としてクロスインレイの平編みメリヤス布としてあり、これを縦方向に牽引して熱セットしてあって、前記上下のコースの前記編み糸は挿入糸をバインダーとして前記掛合位置において、それぞれ融着して形成してあることを特徴とする三層シート用基布とする。

【０００８】また前記の課題を解決するために、前記三層シート用基布の前記挿入糸による編み糸の融着は熔融固化した挿入糸の一部が編み糸繊維の一部乃至全部を抱持して結合したものであることを特徴とすることが好ましい。

【０００９】また前記の課題を解決するために、前記三層シート用基布の前記編み糸は１５デニール乃至１２０デニールでフィラメントカウントは１乃至３６のポリエステルフイラメントであり、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３６デニールの範囲ものが好ましい。

【００１０】前記の課題を解決するために、この方法の発明は合成樹脂製のフィラメント編み糸により平編みのメリヤスを編成する際に、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のモノフィラメント樹脂よりなる挿入糸を相隣するコースの編み糸が掛合する間に挿入して、コース方向に挿入糸が挿入してあるクロスインレイの平編みメリヤス布を編成する第１工程。前記第１工程で編成された編み布を幅寸法を維持したまま、縦方向に順次牽引しながら、前記挿入糸が塑性変形可能な軟化温度であって、編み糸が塑性変形しない温度まで加熱し、前記相隣するコースの編み糸が掛合する間に挟持されている軟化した挿入糸の一部に押し込み、前記軟化した挿入糸の一部によって、前記編み糸の前記掛合部分の全部乃至前記編み糸繊維の一部を抱持する第２工程。その後編み布を牽引状態のまゝ冷却して、前記挿入糸をその状態で固化させる第３工程。以上の３工程よりなる三層シート用の基布の製造方法とする。

【００１１】また前記の課題を解決するために、前述の方法発明において、第１工程の編み糸は前記編み糸は１５デニール乃至１２０デニール、フィラメントカウントは１乃至３６のポリエステルフィラメントを用いる方法であり、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３０デニールの範囲を用いる方法であることが好ましい、

【００１２】また前記の課題を解決するために、他の物の関連発明は織布、不織布、編み布、合成樹脂フィルムの一種よりなる表層と、この裏面にウレタン発泡層及び基布が順次積層して一体化してある表皮材に於いて、前記基布は合成樹脂製のフィラメントよりなる編み糸により平編みのメリヤスとしてあり、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のフィラメント挿入糸が挿入してあって、この挿入糸は前記上下のコースの編み糸の掛合位置において挟持されて、全体としてクロスインレイの平編みメリヤス布としてあり、これを縦方向に牽引して熱セットしてあって、前記上下のコースの編み糸は挿入糸をバインダーとして前記掛合位置において、それぞれ融着して形成してあることを特徴とする自動車座席、靴、鞄、袋物など用三層シートとする。

【００１３】また前記の課題を解決するために、前記自動車座席、靴、鞄、袋物など用三層シートの前記編み糸は１５デニール乃至１２０デニール、フィラメントカウントは１乃至３６のポリエステルをフィラメント用いる方法であり、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３６デニールの範囲であることが好ましい。

【００１４】また前記の課題を解決するために、前記基布の前記編み糸が非熔融性の繊維よりなる自動車座席、靴、鞄、袋物など三層シートの前記挿入糸による編み糸の融着は熔融固化した挿入糸の一部が編み糸繊維の一部乃至全部を抱持して結合したものであることが好ましい。

【００１５】

【作用】請求項１記載の三層シート用の基布は前述の通り構成しているから、相隣するコースの掛合位置に於いて、挿入糸を介して編み糸が結合しているから、編み糸の一部が断線したとしても、その断線部分の直ぐ近傍の両側に相隣する編み糸がその掛合位置で編み糸同士が結

合している部分があるから、編み糸に張力が作用しても、掛合位置における結合部分において、バインダーとなっている前記挿入糸が熔融し固化した部分によって、前記ニードルループ乃至シンカループが延ばされるのが制限され、余程強い引っ張り力が部分的に作用しない限り、前記ニードルループ乃至シンカループ部分が抜けて、縦方向に伝線が起こらない作用をなす。

【００１６】また仮に部分的に受ける引張力によって、一部コースの挿入糸が断線したとしても、或いは成形時の熱によって、挿入糸が断線していたとしても、その近傍のニードルループ乃至シンカループが外れるだけで、他のコースは平常状態を維持する作用をなす。従って、この三層シート用の基布を中間に合成樹脂発泡層（通常ポリウレタンフォーム）のある三層シートの裏面の裏打材として使用する場合においても、縫製部分の縫糸を充分に支持する作用をなす。また全体として、従来のトリコット編みに対し糸の使用量は３０％乃至５０％減である。

【００１７】また基布全体としては平編みメリヤスとしての左右及び縦方向への伸縮性は保持された状態となる。請求項２記載の発明に於いては、請求項１記載の作用の外、前記挿入糸による編み糸の融着は熔融した挿入糸の一部が編み糸の全部若しくは編み糸の繊維間に押し込まれて、一部の繊維を抱持して主として機械的に結合しており、編み糸自体の強度をそのまま維持しているから平編みメリヤスの風合いを保持した状態を維持する作用を為す。

【００１８】請求項３記載の発明に於いては、請求項１記載の作用の外、編み糸がポリエステルであり、挿入糸はナイロンであり、ポリエチレン、ポリプロピレン、又はポエステルそれぞれのデニール数も前記の通りであるから、軽量であり、この三層シート用の基布を中間に合成樹脂発泡層（通常ポリウレタンフォーム）のある三層シートの裏面の裏打材として使用した場合において、三層シートの裏面の滑りがよいものとなり、また全体として軽量となる作用をなす。

【００１９】請求項４記載の方法発明に於いては、前述の第１工程に於いて製造されたクロスインレイの平編みメリヤス編み布は、第２工程で縦方向に牽引されるときに、編み糸が軟化しない範囲で、挿入糸のみが軟化熔融されるから、相隣のコースとの掛合部分において、軟化した挿入糸を前記掛合部分で挟持し、挿入糸を押し潰し、熔融した挿入糸の一部は、その部分の編み糸の一部若しくは全部を抱持するように変形する。而して、その状態で冷却し、熔融した挿入糸は前述の変形状態のまま固化し、相隣する編み糸のニードルループとシンカループが結合され平編みメリヤスとなる作用をなす。この請求項４記載の方法により請求項１記載の発明の基布が製造される。

【００２０】請求項５記載の方法発明に於いては、請求項５記載の発明の作用の外、発明の第１工程の編み糸は前記編み糸は１５デニール乃至１２０デニールであり、フィラメントカウントは１乃至３６のポリエステルを用いる方法であり、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であって、１５デニール乃至３０デニールの範囲のものを用いる方法であるから、前記バインダーとなる挿入糸は加熱により容易に軟化し、その一部が編み糸の全部を抱持し、若しくは編み糸の繊維間に塑性変形して押し込まれ、一部の編み糸繊維を抱持し、相隣るコースの掛合点を塑性流動した挿入糸の一部によって結合する。またこの方法に於いては挿入糸はナイロン、ポリエチレン、ポリプロピレン、ポリエステルのうちの一種であり、前述のデニール数も編み糸より細く、かつ軽量でメリヤス編み布全体としての繊維使用量も、挿入糸を使用しない平編みメリヤスと比較してもせいぜい２０％増の編み布となる作用をなす。

【００２１】請求項６乃至８記載の自動車用座席、靴、鞄、袋物用三層シートの発明においては、これらの目的物として使用中に前記編み糸の一部が破断したとしても、この編み糸はそれぞれ結合点で前述の様に、前記挿入糸をバインダーとして結合されているから、相隣るコースのニードルループまたはシンカループが抜け、順次外れる伝線現象は極めて起こりがたく、この自動車用座席三層シートを裁断して、自動車用座席、靴、袋物などの表面形状に縫製した場合に縫い糸が基布から抜けて、直接発泡層に食い込み、発泡層を破壊して、結局縫製部分を破壊するようなこともなく、長期間縫い糸の保持がされる作用をなす。

【００２２】また前記の縫製した自動車用座席の表面形状の縫製品としたとき、内部に自動車座席のクッション材等を詰め込み、或いは自動車の座席の下地部分にこの縫製品を被せる場合に、前記基布が用いられているから、従来のトリコット同様に前記下地部分との滑りがよい。殊に前記基布の表面を外面に向けて積層したものは、前記作用は更に顕著である。殊に請求項６及び７記載の発明のものにおいては、前記基布の裏面を外面に向けて積層したものは、多少内部の下地部分がウレタンホーム場合は、これとの滑り具合は前記基布の表面を外面に向けて積層したものより滑り難く、完全にウレタンホームよりなる前記下地部分に被せた後においては、みだりに滑らず安定性がよい作用をなす。

【００２３】また自動車座席、靴、鞄、袋物など用三層シートの基布の前記挿入糸による融着部分が塑性変形して、編み糸の全部又は一部を抱持して結合している状態であるから、編み糸の引張力は何ら減殺されておらず、縫い糸に対して充分なアンカー作用をなす。また平編みメリヤスとしての伸縮性と風合いを保っている。

【００２４】

【実施例】

実施例１
図１及び図２に図示するものであり、請求項１、及び請求項３記載の発明を含む実施例である。編み糸１０として、ポリエステルよりなるマルチフィラメントを用い、そのデニール数は１５乃至１２０であり、フィラメントカウントは３２乃至４２のものを用いた。また挿入糸１１としてはナイロン６のモノフィラメントを用い、デニール数は１５ないし３６のものを用いた。而して編み組織としては、編み糸１０によって平編メリヤス編み布を編む際に、前記挿入糸１１を各コース毎に挿入したクロスインレイの平編みメリヤス編み布として（図１参照）、三層シート用基布１３を形成している。前述の挿入糸１１は各コース毎に挿入することが好ましいが、２又は３コース毎であっても、これらの請求項１、請求項３及び請求項４記載の発明の実施例に含まれる。
【００２５】前記挿入糸１１は図示の例では１ウエルおきに相隣するコースの編み糸１０間に挿入され、その隣のウエルに於いては、その表面側に浮かしてそれぞれ形成してあり、相隣する挿入糸１１の編み糸１１によって挟持される位置はウエル位置が異にしてある。即ち相隣するコースのニードルループとシンカーループとの掛合部１４のうち、コース方向に１ウエルおきに挿入糸１１を挟持している。
【００２６】更に前記挿入糸１１を挟持した編み糸１０の結合点１２はそれぞれ編み糸１０の一部をバインダーとして、相互に溶着されている（図２参照）。その結合状態は、前記編み糸１０の一部が軟化して塑性変形し、編み糸１０の繊維間に食い込み、一部の繊維を抱持して、その状態で冷却した挿入糸１１によって、主として機械的に結合されている。
【００２７】前述の実施例に用いた編み糸１０としてポリエステルのマルチフィラメント糸の材質は単なる例示であって、その他の合成樹脂製のモノフィラメントであってもこの実施例に含まれる。合成樹脂製の繊維としては例えば、ビニロン、ビニリデン、ポリ塩化ビニル、アクリル、ポリエチレン、ポリプロピレン、ポリウレタンなどであってもよく、デニール数１５乃至１２０、ヒラメントカウント１乃至３６の範囲であり、挿入糸１１より融点が相対的に高い編み糸と適宜組み替えても、前述の請求項１、請求項３及び請求項４記載の発明の実施例に含まれる。
【００２８】また挿入糸１１としては丈夫で融点が前記編み糸１０よりも相対的に１５℃以上低い熱可塑性合成樹脂性のフィラメントであれば、ナイロン６に限定するわけではない。
【００２９】実施例１の作用は請求項１、請求項３及び請求項４記載の発明の作用を合わせて奏するため、重ねての説明を省略する。挿入糸１１が各コース毎になく３コースまでの範囲で１コースおきまたは２コースおきに挿入したものは、編み糸１０が断線したときは、伝線が起こったとしても、次の挿入糸１１のあるコースで伝線が止まる作用を成す。
【００３０】実施例２
請求項４及び請求項５記載の方法発明の実施例であり、実施例１の基布を製造する方法である。図４のブロック線図に基づいて説明する。
【００３１】先ず実施例１記載の編み糸１０及び挿入糸１１を用い、丸編み機または平編み機を用いて、各コース毎に挿入糸１１をクロスインレイして、クロスインレイの平編みメリヤス編み布を順次編成する。次に、この編成された編み布を順次縦方向に牽引しながら、例えば加熱トンネルを通す。この場合編み糸１０は緊張状態となるが、挿入糸１１には全く引張力は作用しない。
【００３２】加熱トンネル内の温度は前記挿入糸１１の塑性変形可能な軟化温度（ナイロン６の場合は１３０℃乃至１４０℃）に加熱すると、編み糸１０は軟化せず殆どそのままの状態であり、各挿入糸１１は軟化され、これを挟持している相隣のコースの編み糸１０の掛合部分において、その牽引力によって軟化状態の挿入糸１１に食い込み、挿入糸１１の一部は編み糸１０の繊維間に細かく分散して押し込まれる（図２参照）。つまり熔融した挿入糸１１の一部が編み糸１０の一部即ち、繊維を抱持した状態となる。挿入糸１１の太さを編み糸１０よりも相対的に細いものを使用する場合も、この実施例に含まれる。前述の加熱手段は加熱トンネルに限定されず加熱ロールによっても同様の結果が得られ、この発明の方法の実施例に含まれる。
【００３３】次に加熱トンネルより搬出された編み布は冷却区間において、縦方向に牽引された状態のまま、空冷または水槽中に入れて冷却する。その後必要に応じて、幅方向に挿入糸１１がほぼ直線になるまで拡げて、仕上げて成品たる基布１３とする。
【００３４】実施例２の方法の実施例の作用は請求項４及び請求項５記載の発明の効果を合わせて奏するため重ねての説明を省略する。具体的には、クロスインレイされている挿入糸１１のうち、編み糸１０よりなるメリヤス面から浮き上がった部分は、加熱時の熱により、一部が溶断する部分もあり、或いは熔融して細くなる部分もある（図２参照）。その他、挿入糸１１が編み糸１０より細いものを用いる実施例の方法においては、挿入糸１１の軟化が容易であり、挿入糸１１と編み糸１０との熔融温度差の少ない場合あっても、過加熱により編み糸１０を熱損傷するおそれがなく、挿入糸１１の選択幅が拡大する作用をなす。
【００３５】実施例３
請求項６記載及び７記載の発明を含むの実施例であり、実施例１記載の基布を用いたのであり、この基布１４たるメリヤス地の裏面側ウレタンホーム層１５及び表層１６を順次重なって密着して一体となっている自動車座席、靴、鞄、袋物など用の三層シートＡとしたものであ

る（図５参照）。

【００３６】前記の表層１６は織布、不織布、編み布、合成樹脂フイルムなどよりなり、縫い糸１７が表層１６を破壊して、発泡ポリウレタン層１５にもぐり込まないものであれば、この発明においては特に限定はない。

【００３７】このようにして形成されている実施例３の自動車座席、靴、袋物など用三層シートＡの作用は例えば、自動車座席として、この自動車座席用三層シートＡを使用するとき、適宜形状に裁断とて縫製して使用されるが、前記基布１３の編み糸１０は縫い糸１７のアンカーとして、充分これを支持し、永年自動車座席として使用された結果、縫い糸１７部分に応力が集中して、その裏面の基布１４のうちの一部の編み糸が切断されたとしても、その直ぐ近傍おいて、相隣するコースの編み糸との掛合点乃至結合点で結合されているから、相隣するコース同士の編み糸１０のニードルループ乃至シンカループの掛合が外れ難く、従って、前記断線部分よりウエル方向に伝線現象が極めて起こり難い。従って縫い糸１７は充分に前記編み糸１０に支持され続ける作用をなす。

【００３８】また自動車座席用三層シートＡの裏面は前記の基布１４のメリヤス面の表面側である場合は凹凸が少なく摩擦係数が小さい。従って自動車用座席の形状に仕立てた後、内部にクッション材を充填したり、或いはクッション材の上に覆い被せるときにも、滑りやすく作業性がよい。

【００３９】この発明において、前記自動車座席用三層シートＡと同一の構造の三層シートとし、自動車の座席以外の目的として、靴、他鞄、ハンドバッグなどの袋物用の三層シートとすることもでき、また衣服用の三層シートとしても使用できる。これらの場合も自動車座席用三層シートＡの場合と同等の作用をなす。　また衣服用の三層シートとするときは、裏面のメリヤス編みの表を外面にして張り合わせたものは、裏生地又は下着との滑りがよく気心地がよいものとなる。

【００４０】

【発明の効果】請求項１の物の特定発明においては、相隣するコースの掛合位置に於いて、挿入糸を介して編み糸が結合しているから、編み糸の一部が断線したとしても、その断線部分の直ぐ近傍の両側に前記編み糸が結合している部分があるから、編み糸に張力が作用しても、前記挿入糸によって、前記ループ乃至シンカが延ばされるのが制限され、余程強い引っ張り力が部分的に作用しない限り、前記ループ乃至シンカ部分が抜けて、縦方向に伝線現象が起こらない効果を奏する。

【００４１】また挿入糸の融点は編み糸の融点より低いものを用いているから、編み糸自体の強度は充分に保持されており、仮に部分的に受ける引張力によって、一部コースの編み糸が断線したとしても、その部分のニードルループ乃至シンカループが外れるだけで、との隣の他ウエルの相隣るコース若しくは次のコースの掛合部に於いては、相隣のコースが相互に結合しているから、それ以上伝線は広がらず平常状態を維持する効果を有する。

【００４２】また相隣するコースの結合点は前記の挿入糸をバイダーとして相隣するコースの編み糸が結合されている部分のみで、他は全く結合されていないから、クロスインレイ乃至平メリヤス編み布としての風合いと縦横の伸縮性を維持している。

【００４３】合成樹脂発泡層を中間に表層とこの基布でサンドイッチ状に挟んで成形した時に、前記編み糸は伝線し難く、縫製糸の支持力が高く、三層シートの内面が滑りやすいものが得られ、自動車座席用は勿論のこと、その他の靴、鞄、などの袋物、或いは衣服用の三層シートの基布として最適である。また全体として、従来のトリコット編みに対し糸の使用量は３０％乃至５０％減で軽量である。

【００４４】また全体として平メリヤスであるから、表面側は凹凸が少なく、滑らかであり、裏面はこれに比較して、凹凸があるから、三層シートの基布として使用するとき、表裏の何れを外側にして、積層するかによって、完成した三層シートの裏面の滑り度合いが異なるものが、２種成形することが出来る。従って、目的に応じこの基布の表裏何れかを外面にして、三層シートを成形することができる。

【００４５】請求項２記載の発明は請求項１記載の効果のほか相隣するコースの挿入糸による編み糸の結合は、編み糸繊維の一部乃至全部を抱持して結合したものであるから、結合は強固で編み糸の風合い及びメリヤス生地としての伸縮性は損なわておらず、かつ強度も編み糸の強度を維持している効果を有する。

【００４６】請求項３記載の発明は請求項１記載または請求項２の効果の他、編み糸は１５デニール乃至１２０デニールであり、フィラメントカウント１乃至３６のポエステルであり、挿入糸はナイロン、ポリエチレン、ポリプロピレン、ポリエステルのうちの一種であり、１５乃至３６デニールのものを用いたものであるから、基布自体が極めて軽量で、摩擦計数が小さく、引っ張り強度が大きく、縫い糸の支持力が大きい。従って、自動車座席用は勿論のこと、靴、鞄その他の袋物、或いは衣服用の三層シートの基布として使用したとき、基布が滑りやすく、自動車座席用として使用するときは、縫製作業後内部にクッション材などを挿入する時の作業性がよいし、靴、鞄、衣服用として使用する時は、基布の肌触りがよく、また裏生地若しくは下着との滑りもよい。

【００４７】請求項４及５記載の方法発明は、従前の平編み機や丸編み機を用いて簡単にかつ、従来のトリコット編みの方法より数倍の編み速度で編み布が製造でき、かつ加熱牽引及び冷却も連続加工が出来るから、すこぶる能率的に請求項１、２及び３記載の発明の基布が製造できる。さらに単に第１工程で編み上げた編み布を、第２工程で単に牽引しながな前記の温度範囲で加熱し冷却

するだけで相隣するコースの掛合部分のみをそれぞれ結合ができる。

【００４８】請求項６、７及び８記載の関連発明の物の発明に於いては、前述の請求項４及５記載の方法発明により成形された請求項１記載の基布を自動車の座席、靴、鞄、袋物など用の三層シートの基布として、形成したものであるから、この三層シートによって、自動車座席の表面を形成するように、或い靴、鞄、袋物など適宜目的に応じた形状に裁断し、ミシンなどを用いて縫製すると、この時前述の編み糸及び挿入糸は縫い糸と掛合して、充分な支持力を発揮し、縫糸が必要以上に中間の発泡層に食い込ませない効果を奏する。

【００４９】而して、例えば自動車座席の表層材として縫製し、内部にクッションなどを詰め込み、或いは自動車の座席の骨組み及びクッション材が取り付けてある自動車の座席の下地部分に被せて、自動車の座席を完成させる。この時、前記基布が発泡層の裏面に一体に積層されているから、従来のトリコットなどの基布と同様に座席の下地との滑りがよくすこぶる組立て作業の作業性がよい。

【００５０】また自動車用座席その他、目的物に縫製後、これらの使用中に編み糸の一部が破断したとしても、編み糸はそれぞれ結合点で、前述の様に挿入糸をバインダーとして結合されているから、相隣るコースのニードルループまたはシンカループが抜け、順次外れる伝線減少は極めて起こり難たく、縫糸が基布から抜けて、直接発泡層に食い込み、発泡層を破壊して、結局縫製部分を破壊するようなこともなく、長期間縫製糸の保持がされる効果を有する。

【００５１】請求項８記載の物の発明に於いては、自動車座席用三層シートの基布の前記挿入糸による融着部分が挿入糸が塑性変形して、編み糸の繊維間に食い込んで、主として機械的に結合しているから、編み糸の引張力は何ら減殺されておらず、縫い糸に対して充分なアンカー作用をなす。また編み糸の他の部分に対しては、通常のメイヤスの風合いを保持している。

【００５２】実施例固有の効果

実施例１の物の効果は請求項１、請求項３及び請求項４記載の発明の効果を合わせて奏する。挿入糸１１がコース毎になく一つおき又は二つおきにある物においては、挿入糸１１が少ないだけ、三層シート用の基布として、糸使用量が少なく軽量であり、また仮に編み糸の一部であって、挿入糸１１のないコースの編み糸が断線しても、２コース以内には必ず相隣するコースの編み糸が結合した結合点１２があるから、その部分のニードルループ乃至シンカループはそれほど延ばされず、伝線減少は余り起こらず、仮に起こったとしても、前記挿入糸１１が挿入されて、結合点１２があるコースで伝線が止まり、実質的に伝線が伝播するコースは２コースまでであり、実質的に毎コース毎に挿入糸１１のあるものと伝線阻止効果において、遜色はない。

【００５３】実施例２の方法は請求項４及び請求項５記載の方法発明の効果を合わせて奏する。その他、挿入糸１１が編み糸１０より細いものを用いる実施例の方法においては。挿入糸１１の軟化が容易であり、挿入糸１１と編み糸１０との熔融温度差の少ない場合あっても、過加熱により編み糸１０を熱損傷するおそれがなく、挿入糸１１の選択幅が拡大する効果を奏する。実施例３の物は請求項６及び８記載の発明の効果を合わせて奏する。

【図面の簡単な説明】

【図１】クロスレイイン編み布の一部拡大表面図である。

【図２】加熱成形後の基布の一部拡大表面図である。

【図３】編み糸と挿入糸との結合状態を示す拡大断面図である。


【図４】実施例２の方法のフローチャートである。

【図５】実施例３の三層シートの縫い合わせ部分の拡大断面図である。


【符号の説明】

１０　編み糸
１１　挿入糸
１２　結合点
１３　基布
１５　表層
１６　合成樹脂発泡層
１７　縫い糸


【図１】




【図２】

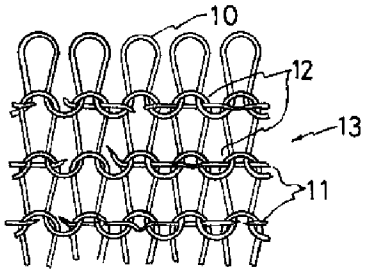


【図３】



【図４】

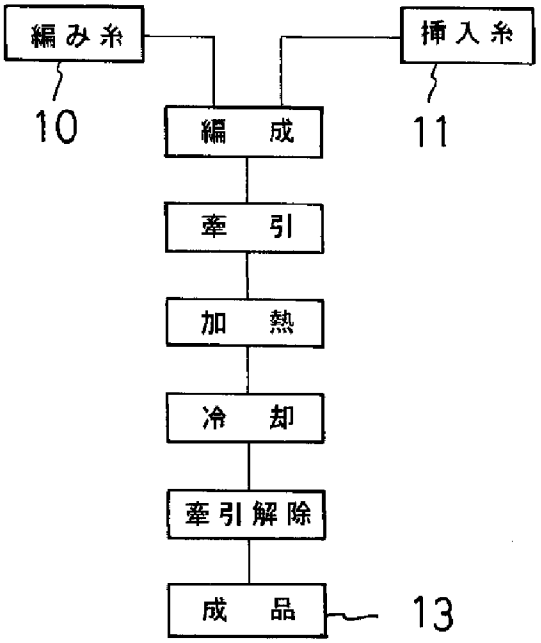

【図５】

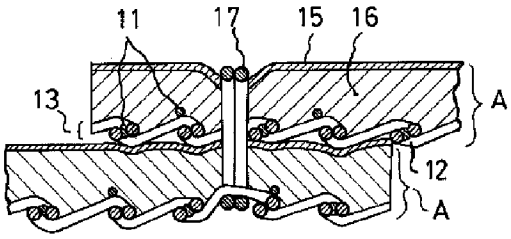

【手続補正書】
【提出日】平成６年１１月１７日
【手続補正１】
【補正対象書類名】明細書
【補正対象項目名】特許請求の範囲
【補正方法】変更
【補正内容】
【特許請求の範囲】
【請求項１】合成樹脂製のフィラメントよりなる編み糸により平編みのメリヤスとしてあり、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のフィラメント挿入糸が挿入してあって、この挿入糸は前記上下のコースの編み糸の掛合位置において挟持されて、全体としてクロスインレイの平編みメリヤス布としてあり、これを縦方向に牽引して熱セットしてあって、前記上下のコースの編み糸は挿入糸をバインダーとして前記掛合位置において、それぞれ融着して形成してあることを特徴とする三層シート用基布。
【請求項２】前記挿入糸による前記編み糸の融着は溶融固化した挿入糸の一部が前記編み糸繊維の一部乃至全部を抱持して結合したものであることを特徴とする請求項１記載の三層シート用基布。
【請求項３】前記編み糸は１５デニール乃至１２０デニールであり、フィラメントカウント１乃至３６のポリエステルフィラメントであり、前記挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３６デニールの範囲あることを特徴とする請求項１または請求項１又は請求項２記載の三層シート用基布。
【請求項４】合成樹脂製のフィラメント編み糸により平編みのメリヤスを編成する際に、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のモノフィラメント樹脂よりなる挿入糸を相隣するコースの編み糸が掛合する間に挿入して、コース方向に挿入糸が挿入してあるクロスインレイの平編みメリヤス布を編成する第１工程。前記第１工程で編成された編み布を幅寸法を維持したまま、縦方向に順次牽引しながら、前記挿入糸が塑性変形可能な軟化温度であって、編み糸が塑性変形しない温度まで加熱し、前記相隣するコースの編み糸が掛合する間に挟持されている軟化した挿入糸の一部によってを相圧接する部分前記編み糸の全部乃至前記編み糸繊維の一部を抱持する第２工程。その後編み布を牽引状態のまゝ冷却して、前記挿入糸をその状態で固化させる第３工程。以上の３工程よりなる三層シート用の基布の製造方法。
【請求項５】請求項４の発明の第１工程の編み糸は前記編み糸は１５デニール乃至１２０デニール、フィラメントカウントは１乃至３６のポリエステルフィラメント、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３０デニールの範囲のものを用いる方法であることを特徴と

する三層シート用の基布の製造方法。
【請求項６】織布、不織布、編み布、合成樹脂フィルムの一種よりなる素層と、この裏面にウレタン発泡層及び基布が順次積層して一体化してある表皮材に於いて、前記基布は合成樹脂製のフィラメントよりなる編み糸により平編みのメリヤスとしてあり、これに少なくとも３コース毎に前記編み糸よりも低融点の熱可塑性合成樹脂のフィラメント挿入糸が挿入してあって、この挿入糸は前記上下のコースの編み糸の掛合位置において挟持されて、全体としてクロスインレイの平編みメリヤス布としてあり、これを縦方向に牽引して熱セットしてあって、前記上下のコースの編み糸は挿入糸をバインダーとして前記掛合位置において、それぞれ融着して形成してあることを特徴とする自動車座席、靴、鞄、袋物など用三層シート。
【請求項７】前記編み糸は前記編み糸は１５デニール乃至１２０デニール、フィラメントカウントは１乃至３６のポリエステルを用いる方法であり、挿入糸はナイロン、ポリエチレン、ポリエステル、ポリプロピレンのうちの一種であり、１５デニール乃至３６デニールの範囲であことを特徴とする請求項６記載の自動車座席、靴、袋物など用三層シート。
【請求項８】前記挿入糸による編み糸の融着は溶融固化した挿入糸の一部が編み糸繊維の一部乃至全部を抱持して結合したものであることを特徴とする請求項６、又は請求項７記載の自動車座席、靴、鞄、袋物など用三層シート。
【手続補正２】
【補正対象書類名】明細書
【補正対象項目名】０００８
【補正方法】変更
【補正内容】
【０００８】また前記の課題を解決するために、前記三層シート用基布の前記挿入糸による編み糸の融着は溶融固化した挿入糸の一部が編み糸繊維の一部乃至全部を抱持した結合したものであることを特徴とすることが好ましい。
【手続補正３】
【補正対象書類名】明細書
【補正対象項目名】００１４
【補正方法】変更
【補正内容】
【００１４】また前記の課題を解決するために、前記基布の前記編み糸が非溶融性の繊維よりなる自動車座席、靴、鞄、袋物など三層シートの前記挿入糸による編み糸の融着は溶融固化した挿入糸の一部が編み糸繊維の一部乃至全部を抱持して結合したものであることが好ましい。
【手続補正４】
【補正対象書類名】明細書
【補正対象項目名】００１５
【補正方法】変更
【補正内容】
【００１５】
【作用】請求項１記載の三層シート用の基布は前述の通り構成しているから、相隣するコースの掛合位置に於いて、挿入糸を介して編み糸が結合しているから、編み糸の一部が断線したとしても、その断線部分の直ぐ近傍の両側に相隣する編み糸がその掛合位置で編み糸同士が結合している部分があるから、編み糸に張力が作用しても、掛合位置における結合部分において、バインダーとなっている前記挿入糸が溶融し固化した部分によって、前記ニードルループ乃至シンカループが延ばされるのが制限され、余程強い引っ張り力が部分的に作用しない限り、前記ニードルループ乃至シンカループ部分が抜けて、縦方向に伝線が起こらない作用をなす。
【手続補正５】
【補正対象書類名】明細書
【補正対象項目名】００１７
【補正方法】変更
【補正内容】
【００１７】また基布全体としては平編みメリヤスとしての左右及び縦方向への伸縮性は保持された状態となる。請求項２記載の発明に於いては、請求項１記載の作用の外、前記挿入糸による編み糸の融着は溶融した挿入糸の一部が編み糸の全部若しくは編み糸の繊維間に押し込まれて、一部の繊維を抱持して主として機械的に結合しており、編み糸自体の強度をそのまま維持しているから平編みメリヤスの風合いを保持した状態を維持する作用を為す。
【手続補正６】
【補正対象書類名】明細書
【補正対象項目名】００１９
【補正方法】変更
【補正内容】
【００１９】請求項４記載の方法発明に於いては、前述の第１工程に於いて製造されたクロスインレイの平編みメリヤス編み布は、第２工程で縦方向に牽引されるときに、編み糸が軟化しない範囲で、挿入糸のみが軟化熔融されるから、相隣のコースとの掛合部分において、軟化した挿入糸を前記掛合部分で挟持し、挿入糸を押し潰し、溶融した挿入糸の一部は、その部分の編み糸の一部若しくは全部を抱持するように変形する。而して、その状態で冷却し、溶融した挿入糸は前述の変形状態のまま固化し、相隣する編み糸のニードルループとシンカループが結合され平編みメリヤスとなる作用をなす。この請求項４記載の方法により請求項１記載の発明の基布が製造される。
【手続補正７】
【補正対象書類名】明細書

【補正対象項目名】００２２
【補正方法】変更
【補正内容】
【００２２】また前記の縫製した自動車用座席の表面形状の縫製品としたとき、内部に自動車座席のクッション材等を詰め込み、或いは自動車の座席の下地部分にこの縫製品を被せる場合に、前記基布が用いられているから、従来のトリコット同様に前記下地部分との滑りがよい。殊に前記基布の表面を外面に向けて積層したものは、前記作用は更に顕著である。殊に請求項６及び７記載の発明のものにおいては、前記基布の裏面を外面に向けて積層したものは、多少内部の下地部分がウレタンホームの場合、これとの滑り具合は前記基布の表面を外面に向けて積層したものより滑り難く、完全にウレタンホームよりなる前記下地部分に被せた後においては、みだりに滑らず安定性がよい作用をなす。
【手続補正８】
【補正対象書類名】明細書
【補正対象項目名】００３４
【補正方法】変更
【補正内容】
【００３４】実施例２の方法の実施例の作用は請求項４及び請求項５記載の発明の効果を合わせて奏するため重ねての説明を省略する。具体的には、クロスインレイされている挿入糸１１のうち、編み糸１０よりなるメリヤス面から浮き上がった部分は、加熱時の熱により、一部が溶断する部分もあり、或いは溶融して細くなる部分もある（図２参照）。その他、挿入糸１１が編み糸１０より細いものを用いる実施例の方法においては、挿入糸１１の軟化が容易であり、挿入糸１１と編み糸１０との溶融温度差の少ない場合あっても、過加熱により編み糸１０を熱損傷するおそれがなく、挿入糸１１の選択幅が拡大する作用をなす。
【手続補正９】
【補正対象書類名】明細書
【補正対象項目名】００４１
【補正方法】変更
【補正内容】
【００４１】また挿入糸の融点は編み糸の融点より低いものを用いているから、編み糸自体の強度は充分に保持されており、仮に部分的に受ける引張力によって、一部コースの編み糸が断線したとしても、その部分のニードルループ乃至シンカループが外れるだけで、この隣の他ウエルの相隣るコース若しくは次のコースの掛合部に於いては、相隣のコースが相互に結合しているから、それ以上伝線は広がらず平常状態を維持する効果を有する。
【手続補正１０】
【補正対象書類名】明細書
【補正対象項目名】００５２
【補正方法】変更
【補正内容】
【００５２】実施例固有の効果
実施例１の物の効果は請求項１、請求項３及び請求項４記載の発明の効果を合わせて奏する。挿入糸１１がコース毎になく一つおき又は二つおきにある物においては、挿入糸１１が少ないだけ、三層シート用の基布として、糸使用量が少なく軽量であり、また仮に編み糸の一部であって、挿入糸１１のないコースの編み糸が断線しても、２コース以内には必ず相隣するコースの編み糸が結合した結合点１２があるから、その部分のニードルループ乃至シンカループはそれほど延ばされず、伝線現象は余り起こらず、仮に起こったとしても、前記挿入糸１１が挿入されて、結合点１２があるコースで伝線が止まり、実質的に伝線が伝播するコースは２コースまでであり、実質的に毎コース毎に挿入糸１１のあるものと伝線阻止効果において、遜色はない。

フロントページの続き

(51)Int.Cl.[6]	識別記号	庁内整理番号	ＦＩ	技術表示箇所
Ｄ０６Ｃ　7/00			Ａ	

(19) RÉPUBLIQUE FRANÇAISE

INSTITUT NATIONAL
DE LA PROPRIÉTÉ INDUSTRIELLE

PARIS

(11) N° de publication : **2.171.172**
(A n'utiliser que pour le classement et les commandes de reproduction).

(21) *N° d'enregistrement national :* **73.04106**
(A utiliser pour les paiements d'annuités, les demandes de copies officielles et toutes autres correspondances avec l'I.N.P.I.)

DEMANDE DE BREVET D'INVENTION

1re PUBLICATION

(22) Date de dépôt ..... 6 février 1973, à 15 h 45 mn.

(41) Date de la mise à la disposition du public de la demande..... B.O.P.I. — «Listes» n. 38 du 21-9-1973.

(51) Classification internationale (Int. Cl.) **D 04 h 1/04; A 43 b 3/10, 23/02; B 32 b 5/02.**

(71) Déposant : Société dite : IMPERIAL CHEMICAL INDUSTRIES LIMITED, résidant en Grande-Bretagne.

(73) Titulaire : *Idem* (71)

(74) Mandataire : Simonnot, Rinuy, Santarelli.

(54) **Etoffes non tissées.**

(72) Invention de :

(33) (32) (31) Priorité conventionnelle : *Demande de brevet déposée en Grande-Bretagne le 7 février 1972, n. 5.490/1972 au nom de la demanderesse.*

La présente invention concerne des étoffes non tissées améliorées qui sont renforcées et stabilisées par des liaisons formées entre les fibres ou filaments contigus, la matière constituant les liaisons provenant de certains au moins des filaments ou fibres dont se compose l'étoffe non tissée.

Il a été proposé de réaliser des étoffes non tissées à partir d'un mélange de fibres homogènes de deux types dont celles de l'un d'eux (les fibres liables) peuvent être rendues adhésives dans des conditions qui laissent les fibres de l'autre type (les fibres non liables) inchangées. Ainsi, des étoffes non tissées ont été produites à partir de mélanges de fibres naturelles, par exemple de laine ou de coton,avec des fibres synthétiques, par exemple des fibres de poly(ε-caprolactame) ou à partir de mélanges de deux fibres synthétiques différentes, par exemple des fibres de poly(hexaméthylène-adipamide) avec des fibres de poly(ε-caprolactame). Dans les deux cas, les fibres de poly(ε-caprolactame) sont rendues adhésives à une température d'environ 210°C qui n'affecte pas sensiblement les autres types de fibres,de sorte qu'elles adhèrent les unes aux autres et aux autres fibres non liables et forment des liaisons après refroidissement.

Plus récemment, le brevet britannique N° 1 073 182 a proposé de fabriquer un type d'étoffes non tissées liées connues sous la désignation d'étoffes liées par fusion. Ces étoffes sont renforcées et stabilisées par des liaisons formées entre les fibres ou filaments contigus, dont une proportion au moins est conjuguée et présente au moins un composant formant une partie de sa surface qui peut être rendu collant dans des conditions qui n'affectent pas sensiblement les autres composants, c'est-à-dire que le composant est potentiellement adhésif.

Ces fibres conjuguées (qui sont les fibres liables) peuvent être utilisées soit seules, soit en mélange avec d'autres fibres non liables qui ne sont pas affectées par le traitement de liaison. Selon l'une de ses caractéristiques, la présente invention concerne les étoffes ou structures liées par fusion comprenant un mélange de fibres conjuguées et de fibres non

liables.

Pour plus de commodité et pour faciliter la compréhension, on va se référer dans le présent mémoire à des fibres à deux composants (en ce qui concerne les étoffes liées par fusion). Toutefois, il est bien entendu que les fibres hétérogènes et les fibres conjuguées contenant plus de deux composants ne sont pas exclues du cadre de l'invention.

Dans le contexte du présent mémoire, le mot "fibre" doit être considéré comme englobant les filaments continus aussi bien que les fibres discontinues.

Les propriétés physiques des étoffes non tissées liées dépendent dans une certaine mesure du nombre des liaisons entre les filaments et par suite de la proportion des fibres liables dans le mélange. Pour certaines applications nécessitant une propriété physique spécifique minimale, par exemple une grande résistance à la déchirure, les propriétés de l'étoffe telle que la résistance à l'abrasion de la surface et l'aspect peuvent être inappropriées, étant donné que la proportion des fibres liables donnant cette propriété spécifique peut être trop faible pour fixer et lier efficacement toutes les fibres de la surface à la masse principale de l'étoffe.

En conséquence, la présente invention concerne une étoffe non tissée obtenue à partir d'un mélange de fibres liables et non liables et comprenant un corps principal et des couches superficielles de part et d'autre de ce dernier, une couche superficielle au moins contenant une plus forte proportion de fibres liables que le corps principal.

D'une manière surprenante, les propriétés physiques ne sont tout au plus que légèrement affectées par ces surfaces riches en fibres liables, et la résistance à l'abrasion et l'aspect sont très améliorés.

La présente invention s'applique à tout type d'étoffes ou structures non tissées liées, que ce soit par fusion ou d'une autre manière, comprenant des étoffes fabriquées à partir de fibres discontinues, de filaments continus, des étoffes aiguilletées et tuftées, des étoffes à couches multiples et des étoffes

piquées.

Les produits de l'invention peuvent être réalisés par un certain nombre de procédés dont la nature dépend du type de fibres et de la nature du produit que l'on désire obtenir. Par exemple, un produit se composant de fibres discontinues peut être réalisé en produisant une première bande présentant un mélange contenant une forte proportion de fibres liables et une seconde bande comprenant une plus faible proportion de fibres liables que la première bande et en stratifiant les première et seconde bandes. Les bandes peuvent être produites par n'importe quel procédé classique, par exemple par traitement sur la machine Garnett, par introduction des nappes en travers de la carde ou par dépôt à l'air des fibres.

Des bandes à filaments continus peuvent être préparées d'une façon classique en utilisant plusieurs dispositifs pour déposer les filaments sur une surface collectrice, les dispositifs déposant les filaments formant une surface recevant une plus forte proportion de fibres liables que les autres dispositifs de dépôt.

Des bandes à fibres discontinues peuvent être également réalisées en posant en travers une seule nappe non tissée dans laquelle une forte proportion des fibres liables sont concentrées vers les bords de la nappe. Lorsque cette nappe est posée en travers, les surfaces de la bande non tissée résultante sont riches en fibres liables.

La proportion des fibres liables des couches superficielles du produit dépend dans une large mesure de l'équilibre entre des facteurs économiques et la nécessité d'obtenir une surface ayant une grande résistance à l'abrasion et un bon aspect.

Il est préférable que la proportion des fibres liables de la couche superficielle soit d'au moins 20 % supérieure à la proportion des fibres liables du corps principal. Le corps principal doit contenir au moins 5 % et de préférence 25 % de fibres liables (voir brevet britannique N° 1 073 182 précité).

Les exemples suivants sont donnés à titre illustratif, mais non limitatif de l'invention.

Skechers EX1013-p. 240
Skechers v Nike

Exemple 1

On fait fondre un polypropylène ayant un indice d'écoulement à l'état fondu de 6, lorsqu'on le détermine suivant la méthode ASTM - D1238 à 190°C sous une charge de 2,14 kg, et un copolyamide 6.6/6 (75:25 poids/poids), la viscosité relative d'une solution à 8,4 % dans l'acide formique à 90 % étant de 40, dans une extrudeuse à vis d'un diamètre de 7,5 cm et un appareil à vis classique de fusion du "Nylon" sous pression, respectivement. Les polymères fondus sont introduits dans chacun des huit ensembles de filtres dans les proportions de 75 parties de polypropylène et de 25 parties de copolyamide en poids. Le débit total des polymères de chaque ensemble de filtres est de 118 g/minute. Six des huit ensembles produisent chacun 40 filaments homogènes de polypropylène et 42 filaments à deux composants, à savoir une âme de polypropylène et une gaine de copolyamide 6.6/6 (75:25) à un rapport volumique de l'âme à la gaine de 60:40. Chacun des deux autres ensembles de filtres produit 80 filaments à deux composants, à savoir une âme de polypropylène et une gaine de copolyamide 6.6/6 à un rapport volumique de l'âme à la gaine de 80:20. Tous les trous de la filière sont de même dimension. Les filaments extrudés de chaque ensemble de filtres sont refroidis à l'air et étirés à un rapport de 2,67, la surface des rouleaux d'étirage étant moletée. Les 8 faisceaux de filaments sont chargés électrostatiquement et ont fait passer chaque faisceau immédiatement dans un pistolet de pulvérisation qui est animé continuellement d'un mouvement alternatif au-dessus d'une courroie mobile constituée par une toile de fils d'acier inoxydable. Les deux ensembles de filtres ne produisant que des filaments à deux composants alimentent les deux derniers des huit pistolets de pulvérisation. A la sortie du pistolet, les filaments se séparent. La vitesse de déplacement des pistolets est de 1,38 m/seconde.

La largeur de la bande est de 4,3 m et elle pèse 70 g/m^2. On traite la bande par la vapeur à la pression atmosphérique pour favoriser sa séparation du transporteur et on la lie ensuite en la faisant passer dans une chambre à vapeur d'une lon-

gueur de 0,3 m pendant qu'elle est intercalée entre deux courroies transporteuses en tissu. La chambre à vapeur comporte à l'entrée et à la sortie des éléments étanches à la vapeur constitués par des sacs à air gonflables, comme décrit dans le brevet britannique N° 1 001 508, qui ont pour effet de comprimer la bande. Une pression d'air de 3,30 kg/cm^2 est maintenue dans les éléments d'étanchéité et la vapeur d'eau saturée est maintenue à une pression de 1,54 kg/cm^2 dans la chambre, ces conditions ayant pour effet de ramollir les gaines de copolyamide des filaments à deux composants de l'étoffe et de former des liaisons entre lesdits filaments contigus. Finalement, on enroule le produit.

La bande présente des résistances à la déchirure de 25 kg à la fois dans le sens machine et dans le sens transversal.

On recouvre le côté de la bande présentant la plus faible proportion des filaments à deux composants avec une solution visqueuse d'un caoutchouc naturel non vulcanisé qu'on étale régulièrement sur la bande à l'aide d'une raclette. Le caoutchouc est ultérieurement vulcanisé.

Le produit constitue une assise élastique de tapis et est caractérisé par une bonne stabilité dimensionnelle et une bonne résistance à la déchirure, grâce à la bande non tissée liée. Lorsqu'on pose le produit en plaçant la bande au-dessus, la surface supérieure présente une grande résistance à l'abrasion.

A titre de comparaison, on a préparé une assise de tapis analogue renforcée par une bande liée par fusion ayant les mêmes proportions des filaments à deux composants que la bande décrite ci-dessus, mais sans présenter de couche superficielle riche en de tels filaments. Cette assise présente une bonne stabilité dimensionnelle et une bonne résistance à la déchirure, mais la surface supérieure est rapidement usée par abrasion, les filaments se détachant du corps principal.

Une troisième assise, renforcée par une matière liée par fusion se composant entièrement de filaments à deux composants, présente une bonne stabilité dimensionnelle et une bonne résistance à l'abrasion, mais une très faible résistance à la déchi-

rure.

Exemple 2

On prépare une bonne cardée en travers pesant 68 g/m^2 à partir d'un mélange de fibres discontinues comprenant 40 % de fibres de "Nylon 66" de 6 deniers d'une longueur de 63,5 mm et 60 % de fibres hétérogènes à âme et gaîne de 6 deniers d'une longueur de 63,5 mm, l'âme étant en "Nylon 66" et la gaine en "Nylon 6" en proportions égales, et on l'aiguillette légèrement pour former une structure cohérente.

On prépare également une seconde bande cardée en travers pesant 136 g/m^2 à partir d'un mélange de fibres comprenant 70 % de fibres de "Nylon 66" de 3 deniers d'une longueur de 50 mm et 30 % de fibres hétérogènes de 3 deniers d'une longueur de 50 mm, les composants et leur disposition étant identiques à ceux du premier mélange. On aiguillette aussi légèrement cette bande pour former une structure cohérente.

On dépose la seconde bande sur un transporteur mobile et on dépose la première bande sur la surface supérieure de la seconde. On fait passer tout d'abord la bande combinée sur un métier à aiguilles dans lequel elle est consolidée (stratifiée) en utilisant des aiguilles minces (36,norme britannique.), puis on la lie dans une étuve à vapeur d'eau et à air chaud. Dans cette étuve, la bande est exposée à une température de 225°C dans une atmosphère comprenant 20 % d'air et 80 % de vapeur d'eau pendant 20 secondes.

Après le passage dans l'étuve de liaison, la bande est refroidie à la température ambiante et est bobinée. Le produit présente une surface lisse résistant à l'abrasion, son autre surface étant relativement molle. La matière est considérée comme étant appropriée pour réaliser des tiges de pantoufles.

Exemple 3

On prépare l'étoffe à double bande de l'exemple 2, mais en interposant entre les première et seconde bandes une toile de fibres discontinues de "Nylon 66" filé, à 7,2 brins par cm à la fois dans le sens de la chaîne et de la trame. On lie la structure comme dans l'exemple 2. Le produit est analogue à celui de

l'exemple 2, mais présente une plus grande stabilité dimensionnelle.

Exemple 4

On prépare une bande liée comme dans l'exemple 2, mais, immédiatement à sa sortie de l'étuve de liaison, on la fait passer dans une presse de calandrage non traitée, dont un rouleau présente une configuration de gaufrage sur sa surface. La bande est ainsi comprimée sous forme d'une configuration correspondant à celle du rouleau.

Il va de soi que de nombreuses modifications peuvent être apportées à l'étoffe décrite sans sortir du cadre de l'invention.

REVENDICATIONS

1. Etoffe non tissée produite à partir d'un mélange de fibres liables et non liables et comprenant un corps principal et des couches superficielles de part et d'autre de ce dernier, étoffe caractérisée en ce qu'une couche superficielle au moins contient une plus forte proportion de fibres liables que le corps principal.

2. Etoffe selon la revendication 1, caractérisée en ce que les couches superficielles contenant la plus forte proportion des fibres liables constituent au total jusqu'à 50 % en poids de l'étoffe non liée.

3. Etoffe selon la revendication 1 ou 2, caractérisée en ce que la proportion des fibres liables de la couche superficielle présente une proportion de fibres liables d'au moins 20 % supérieure à celle du corps principal.

4. Etoffe selon l'une quelconque des revendications 1 à 3, caractérisée en ce que les fibres liables sont des fibres conjuguées comportant un composant potentiellement adhésif qui constitue au moins une partie de leur surface.

PATENT SPECIFICATION (11) 1 603 487

1 603 487

(21) Application No. 24228/78 (22) Filed 30 May 1978 (19)
(31) Convention Application Nos. 819 834 (32) Filed 30 March 1978 in
891 833
891 835
(33) United States of America (US)
(44) Complete Specification published 25 Nov. 1981
(51) INT. CL.³ B32B 5/18 5/22 27/12 27/40
(52) Index at acceptance
B5N 0518 0522 2712 2740

(54) LEATHER LIKE MATERIALS

(71) We, INMONT CORPORATION, a Corporation organised under the laws of the State of Delaware, United States of America, of 1133 Avenue of the Americas, New York, New York 10036, United States of America, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

This invention relates to the production of leather-like materials.

The leathers used for shoe uppers (and other leather products) come in a great variety of types, grades, and finishes, to meet customer demand. They may vary in colour (and in shadings) gloss, softness, grain, or thickness. Demand for any particular grade or finish may vary, unpredictably, with changes in the public taste or other circumstances.

Economical manufacture of synthetic leatherlike materials often requires relatively large scale continuous runs of any particular grade or finish. If even a small portion of the demand for variety is to be met promptly, large inventories of a great many different finished materials are needed.

The present application describes an overall system, and various aspects thereof, by which synthetic leatherlike materials of high quality (such as desirable softness, tear-resistance, grain, leatherlike "break", good behavior on lasting of shoes, stitch-retention, pleasing and abrasion-resisting surface, freedom from "orange peel", and good moisture vapor transmission,) can be produced as needed. The system even makes it possible for the shoe manufacturer to make his shoe upper materials as required with a minimum of investment in inventory of raw materials and with simple, relatively inexpensive equipment, without the need to use polluting solvents and without the attendant fire and toxicity hazards.

The synthetic leatherlike materials described herein are made up of two or three basic components. One is a thin microporous elastomeric layer. Another is a fibrous backing layer. And a third is a very thin preformed skin. Webs of these materials are laminated together in continuous fashion, preferably entirely by heat, as needed. The microporous elastomeric material and the fibrous backing may be stocked in only one or more or three basic colors (e.g. white, black or grey and brown) and may be produced by large scale continuous manufacture. A wide variety of different colors and patterns of the thin skins may be prepared at low cost, as by gravure printing on suitable thin, economical carrier layers. The grain is produced by continuous heat-embossing of the laminate and may be accomplished on the very same rolls that are used for the laminating.

One way to vary the properties of the shoe upper materials is to vary the fibrous layer. Thus for shoes which are to be made by the known string-lasting or slip-lasting technique, in which the property of stretchability of the shoe upper material (e.g. stretchability such that the upper conforms smoothly to the last at zones of relatively high curvature such as the toe zone) is unimportant or undesirable, the fibrous layer may include a woven structure, such as an open woven scrim, which has (owing to its openness) little yarn crimp and thus resists elongation; the resulting structure is strong but may have a relatively low elongation at break (e.g. an elongation of about 20% or less). Similarly athletic shoes (designed to have high dimensional stability, so as to support the foot well) may be made with such a scrim-containing fibrous layer. For conventional men's dress shoes, particularly of the currently popular softer type, a fibrous layer having considerably greater stretchability may be used (e.g. to produce a structure having an elongation

at break of well above 15% such as 25, 30 or 50%). Also, a different fibrous layer may be preferred in order to obtain the thickness desired for a particular use, e.g., different thicknesses may be employed for men's dress and casual shoes, and thinner material may be used for women's shoes. The system described herein permits a change in the type of fibrous layer to be made simply and easily; there is no need to provide an inventory of laminates of any given fibrous backing.

According to the present invention a process for making artificial leather comprises:

(a) providing a supply of a continuous web of fibrous material, for example comprising needle-punched staple fibres, and a separate supply of a continuous sheet of microporous elastomeric polyurethane and a separate supply of a macro-apertured web of a fusible elastomeric polymer the said microporous elastomeric polyurethane having a higher melting point than the fusible polymer of the macro-apertured web such as to remain in a microporous condition at the fusion temperature of the said macro-apertured web;

(b) continuously pulling the said webs and sheet lengthwise under tension from the said supplies to an assembling zone;

(c) continuously pre-heating the said fibrous web during its passage to the said assembling zone;

(d) continuously bringing the said macro-apertured web into contact with the said pre-heated fibrous web and transferring heat from and through the said fibrous web to the said macro-apertured web to raise the said macro-apertured web to its fusion temperature;

(e) bringing the said microporous sheet into contact with the said macro-apertured web before the said macro-apertued web attains its fusion temperature and before the said macro-apertured web attains its network breakdown temperature whereby the said macro-apertured web adheres to the said microporous sheet without substantial network breakdown;

(f) passing the resulting assemblage of webs and sheet lengthwise through a nip between two rotating rolls, for example comprising a metal roll having a hot surface and an elastomer surfaced back up roll, the said rolls exerting high pressure to compress the said microporous sheet and cause the said fusible elastomeric polymer to flow around fibres of the said fibrous web to encase and bond the said fibres while leaving unbonded breathable areas corresponding to the macro-apertures of the said web; and

(g) cooling the resulting assemblage to set the said fusible polymer in solid condition.

The term "macro-apertured web" means a web having apertures visible to the unaided human eye, but having substantially no apertures which are more than 10 mms across.

The said macro-apertured web preferably is a stretchable web having a thickness of about 3 to 5 mils, and weighs about 0.5 to 0.08 oz/yd^2.

Preferably the said tension on the said macro-apertured web is maintained sufficiently low that the said web stretches less than 10% in passing from its supply to the said nip.

The said fibrous web may comprise an elastomeric binder in amount of about 2 to 40%, based on the total weight of the said fibrous web.

Preferably prior to cooling the assemblage resulting from the process, the said assembly is passed continuously lengthwise onto a rotating roll having a hot surface, the said hot surface preferably having a temperature which is within about 15°C of the melting-sticking temperature of the said microporous material, for providing a finish on the said microporous sheet, and is continuously removed lengthwise from the said hot roll.

The said assemblange is then preferably maintained in a relaxation step under substantial absence of tension and in lengthwise arcuate form with its hot-finished surface convex at an elevated temperature such as to cause lengthwise relaxation of the microporous material thereby causing the said fibrous web laminated thereto to undergo lengthwise contraction.

The said assemblage preferably travels in contact with the said hot surface of the said rotating roll for a residence time of more than 1/2 second while the said assemblage is in arcuate form with its fibrous surface convex, and the said assemblage then, directly after its removal from the said hot surface of the said rotating roll, travels continuously in an arcuate form with its hot-finished surface convex at an elevated temperature such as to cause lengthwise relaxation of the microporous material thereby causing the said fibrous web laminated thereto to undergo lengthwise contraction.

The said hot surface is preferably an embossing surface having ridges penetrating into the said microporous material. The said microporous material is preferably directly in contact with the said hot surface.

The said microporous sheet may be about 10 to 50 mils thick and the said fibrous web may have a thickness of about 20 to 50 mils during the said relaxation step, the overall thickness of the laminate during the said relaxation step being about 35 to 80 mils.

The fibre to elastomer weight ratio in the said assemblage may be about 0.8:1 to 1.2.:1

A grain pattern is preferably imparted to the microporous polyurethane sheet by passing the said sheet material continuously to the nip between a roll having a hot grain-embossing surface having hot grain-embossing projections, (which hot surface may be

afforded by the surface of the one of the two rotating rolls to which the microporous sheet is juxtaposed), and another roll, compressing the said sheet in the said nip and thereby forcing the said projections into the said sheet, passing the said sheet material out of the said nip and maintaining the said sheet material on the said grain embossing surface to transfer heat from the said projections into the said sheet while the said sheet is substantially uncompressed, and then continuously removing the said sheet material from the said hot roll.

In another form of the invention when the said assemblage is on the said hot roll there may be a thin elastomeric skin between the said microporous material and the said hot surface of the said roll. The said thin elastomeric skin may have a thickness of less than about 15 mils.

The residence time of the said sheet material in the said nip is preferably less than about 0.1 second and its residence time on the said hot surface while substantially uncompressed is preferably at least about 1/2 second.

Preferably the said residence time in the said hot nip is so short that the said microporous sheet recovers to substantially its original thickness in the said process.

The said microporous polyurethane preferably has a melting-sticking temperature of at least about 130°C, e.g. about 155—185°C.

In another form of the invention a surface showing a depth of surface colour is imparted to the microporous sheet by a process which comprises continuously supplying a transparent coloured skin having an elastomeric layer onto a hot roll, continuously supplying a web having a coloured microporous elastomeric surface layer into contract with the said coloured skin, and, while the said skin is on the said roll, fusing the said elastomeric layer to the said microporous elastomeric sheet to form a product in which the colour of the said microporous zone is visible through the said coloured skin.

The said skin is preferably supported on a carrier sheet in its passage to and on the said hot roll and the heat to effect the said fusion is supplied from the said roll through the said carrier sheet.

The said skin may be made by gravure coating a plurality of different shades of material successively onto the said carrier sheet, the said different shades of material being differently distributed on the same overall area of the said carrier sheet to form a mottled pattern.

The fibrous web supplied before the process commences preferably is a ligated web, for example comprising needle-punched staple fibres and comprising about 0.05 to 0.1 gram of staple fibres per cubic centimetre, and has a specific gravity below about 0.15 and the continuous sheet of microporous elastomeric polyurethane supplied before the process commences preferably has a specific gravity above 0.2, and the process preferably is such as to compact the said web to raise its specific gravity to above about 0.2.

The said fibrous web preferably comprises heat-settable fibres, and at least one of the said rolls has a hot surface maintained at temperature at which heat-setting of the said heat-settable fibres occurs.

The said fibrous web may be passed through a web-preheating zone under tension before passing through the said nip.

The said heat-settable fibres preferably comprise polyethylene terephthalate staple fibres and the said hot surface preferably is maintained at a temperature of at least about 170°C but below the fusing temperature of the said heat-settable fibres.

According to another form of the invention the process includes:

(a) placing a thin preformed skin on the outer surface of the said microporous polyurethane, the said skin having a surface, in contact with the said microporous outer surface, which is heat fusible to the said outer surface, the said fusible surface of the said skin preferably being of elastomeric polyurethane having a lower melting point than the polyurethane of the said outer microporous surface;

(b) passing the said assemblage continuously lengthwise onto a rotating embossing roll having a hot grain-embossing surface, (which may be afforded by the surface of the one of the two rotating rolls to which the microporous sheet is juxtaposed), and which preferably is at a temperature within about 15°C of the melting-sticking temperature of the said microporous material, in contact with the said skin at a temperature above the temperature at which the said skin fuses to the said outer surface; and

(c) continuously removing the said assemblage lengthwise from the said embossing roll.

The said skin preferably is heat-adhered to the said outer surface of the said microporous polyurethane sheet prior to the said embossing step (b).

The process thus preferably includes the steps of providing a supply of a continuous supporting film, e.g. of polyethylene terephthalate, carrying the said skin, continuously drawing off the said skin-carrying film from the said supply onto the surface of a rotating roll having a hot surface in contact with the said supporting film at a temperature above the said skin-outer surface fusion temperature and maintaining the said outer surface of the said microporous polyurethane in contact with the said skin on the said film-contacted roll so as to adhere the said skin to the said outer microporous surface, and thereafter stripping the said film from the said assemblage prior to the said embossing step (b).

The face of the said skin which is in contact with the said embossing surface preferably carries a release agent.

In the said embossing step (b) the said assemblage passes through the nip between the said embossing roll and an elastomer surface roll biased toward the said embossing roll, and the conditions are preferably such that at the said nip the said microporous polyurethane is compressed and the said elastomer roll surface deformed, and the said microporous polyurethane then expands to substantially its original thickness on leaving the said nip and the said assemblage, with the said skin, then remains in contact with the said embossing roll for a period of at least about 1/2 second, the residence time in the said nip being less than about 0.1 second.

The weight ratio of fibrous material to elastomer in the said assemblage preferably is about 0.8:1 to 1.2:1 and the thickness of the said assemblage is about 20 to 80 mils.

The said skin may comprise a plurality of layers including a layer adjacent to the said film and carrying a release agent to reduce adhesion to the said embossing surface and another layer, further from the said film than the said first mentioned layer, of elastomeric polyurethane.

The invention also extend to a highly air-permeable grain-embossed artificial leather having a dull grained surface comprising a fibrous non-woven material and a microporous elastomeric layer laminated thereto by fused elastomeric material bonded by the process according to the invention to the said microporous layer in a discontinuous or open pattern and embedding adjacent surface portion of fibres of the said non-woven layer, the said microporous layer being produced by coagulation of a solution of elastomer followed by mechanical removal of coagulated surface material to expose the inner structure of the coagulated microporous material and thereby provide an open surface having exposed microscopic open cells, the said microporous material being embossed by contact with a hot grain-embossing surface at a temperature within 15°C of the melting-sticking temperature of the said microporous material, the said embossing being effected to an extent sufficient to impart a visible grain pattern but insufficient to close the said exposed open cells.

Such an artificial leather showing a depth of surface colour may comprise a base sheet having a coloured microporous surface zone heat-laminated to a preformed coloured transparent substantially continuous skin, the colour of the said microporous zone being visible through the said skin. The said microporous zone may be coloured brown or black, and the said skin may be less than 20 mils thick. The microporous zone may be of pigmented elastomeric polyurethane and the said skin may comprise a layer of pigmented elastomer fused to the said microporous zone. The polyurethane of the said microporous zone preferably is thermoplastic and has a fusing temperature above that of the polyurethane of the said skin.

The said skin may comprise at least two layers including an outer layer which is harder than the said elastomer layer.

The fibrous non-woven material may comprise a batt of non-woven fibrous material needle punched to a microporous elastomeric polyurethane sheet having a thickness of about 10 to 40 mils and a specific gravity of about 0.2 to 0.6 so that fibres of the said batt extend transversely from one face of the sheet into the said microporous sheet.

The said needle punched fibres may extend through the said microporous sheet onto the opposite face thereof, the amount of fibres being above about 2 ounces per square yard on the said one face and less than about 1 ounce per square yard on the said opposite face.

Various aspects of the system are described more fully in the following Examples and discussion and accompanying drawings, in which:—

Figures 1—3, 7—9, 12—16B, 18—23A, 33 and 34 are photomicrographs taken with a scanning electron microscope, and Figures 4, 16 and 25—32 are photomicrographs taken with a light microscope. The scale for each photomicrograph is given in the drawings.

Figures 1 and 2 shows the microporous material,

Figure 3 shows a cross-section of a portion of the laminate, illustrating the bonding between fibres and the microporous material,

Figure 4 shows a macro-apertured web used as a bonding material,

Figure 5 shows, schematically, a laminating apparatus,

Figure 6 shows, schematically, another laminating apparatus,

Figures 7 and 8 show a pattern of projections on the microporous material, Figure 7 being a cross-section.

Figure 9 is a cross-section showing the bond between fibers and the microporous material, formed in Example 2,

Figure 10 shows, schematically, an embossing arrangement,

Figures 11 and 11A show, schematically, a portion of the embossing apparatus and the path of the embossed material,

Figures 12 and 12A show the embossed material and Figures 13 and 13A show the material before embossing.

Figure 14 is a cross-section taken at and near the embossed top surface shown in Figures 12 and 12A,

Figures 15, 15A and 15B show the pattern of a first skin-forming coat on a carrier film,

Figures 16, 16A and 16B show material

having two skin-forming coats on a carrier film,

Figure 17 shows, schematically, apparatus for applying the skin to the laminate,

Figures 18, 18A and 18B are cross-sections of the product of Example 4,

Figures 19 and 19A are schematic views of machines for use in applying a film surface to the assemblage in the system described herein,

Figures 20 to 20C and 21 to 21C are cross-sections of products of Example 7 and Figures 22—23A are views of the top surfaces of those products,

Figure 24 is a schematic view of the embossing procedure,

Figures 25 and 25A are cross-sectional views of a needle-punched fibrous material,

Figures 26, 26A, 27 and 27A are cross-sectional views of a laminate made from these needle-punched materials while Figures 28 and 28A are specially prepared views of the same material illustrating the bonding,

Figures 29 to 32 relate to needle-punched microporous material (the darker portions shown in Figures 30 and 32 having been inked for contrast),

Figures 33 (a cross-section) and 34 (a top view of the embossed surface) illustrate less desirable embossed structures, and

Figure 35 is a schematic view of another laminating arrangement.

In the following Examples all proportions are by weight unless otherwise indicated.

The melting-sticking temperatures mentioned herein may be measured on a standard Fischer-Johns melting point block and indicate the temperatures at which the materials stick noticeably to the thin glass cover slip of the block. The measurements with microporous materials (particularly those which have a very open surface structure as shown in Figure 1 and thus have very little material directly in contact with the hot glass) are carried out under conditions providing (a) light pressure on the material, (b) insulation to reduce cooling of the subsurface portions owing to loss of heat by convection (or otherwise) through the microporous open-cell material and (c) sufficient time for subsurface portions to be affected by the temperature of the hot glass. For example the pressure may be provided by a one pound weight exerting its force (through the light insulating layers) on a round piece of the material (about 18 mm in diameter, so that the pressure is about 45 g/cm^2) resting on the hot glass. The insulation may be provided by placing several layers of the microporous sheet material above the sample (so that the total thickness of the layers of microporous material is about 0.1 inch) while underneath the one pound weight there is a thin layer of silicons rubber resting on a thin glass cover slip which in turn rests on the top of those layers of microporous material. In tests in which the assembly is kept for 5 minutes each at melting point block temperatures of 160, 165, 170 and 175°, it is found that slight sticking (requiring one to lightly peel off the material to separate it from the hot glass) occurs at about 160 to 170°C. and strong sticking occurs at about 170°C.

EXAMPLE 1

In this Example a fibrous backing is laminated to a microporous polyurethane sheet about 30 mils (3/4 mm) thick having a specific gravity of about 0.33 and having the microporous structure shown in Figs. 1 and 2. These SEM photomicrographs (taken at an edge of a cross-section cut with a razor) show the internal texture (cross section) of the microporous sheet and, at a long angle, the similar external texture of its top surface. The microporous sheet is made by mechanically slitting a thicker microporous polyurethane sheet made by coagulating, leaching and drying a cast layer containing dissolved polyurethane and dispersed salt particles (salt:polyurethane ratio about 3:1) as described for instance in British patent 1,122,804, and U.S. patents 3,860,680, 4,028,451 and patents referred to therein. The dissolved polyurethane used in that process also contains about 2 to 5% (based on the weight of polyurethane) of carbon black and the coagulated dried material therefore has a dull black or brownish-black appearance. The dried sheet, 1.6 mm thick, is slit mechanically to form two thinner sheets of about 3/4 mm thickness.

The fibrous backing is a 30 mil (about 0.7—0.8 mm) thick fibrous, fabric weighing about 7.6 ounces per square yard, made by needle punching polyester (polyethylene terephthalate) staple fibers through a woven scrim and then impregnating with a latex to add about 20% of butadiene-acrylonitrile copolymer rubber as a binder for the fibrous structure. The woven scrim is made of polyester yarns square woven to have about 20 ends per inch in both warp and weft in a very open weave (the spaces between adjacent yarns being about 5 times the yarn diameter) weighing about 1.6 oz/sq.yd. The fibrous sheet may be made by a needling method as described in U.S. patents 3,206,351, 3,090,100 or 3,090,099. The needled staple fibers constitute about 80% of the total fiber weight. The calculated specific gravity of the fibrous sheet is in the neighborhood of 0.25.

The structure of the resulting laminate, at the interface between fabric and microporous material, is as shown in Figure 3. The materials are bonded together by thermal fusion, under controlled conditions, of an intervening web of macroapertured elastomeric polyurethane whose structure is illus-

trated in Figure 4; it will be seen that it has a lace-like random-patterned fibrous appearance. It is produced by a process of melt-extruding, in tubular form, the polyurethane saturated with inert gas; the extruded material, containing spaced bubbles (formed by release of gas on extrusion), is then stretched to burst the bubbles and opposing walls of the tube are pressed together (while hot and self-adhesive) to form the tubular structure into a flat sheet. Similar materials produced in the same general way (but not having the same melting point and fiber spacing and thickness) are sold under the name "Sharnet", as heat-sealable adhesives for thermally bonding fibrous fabrics together. See U.S. 4062915.

The heat-lamination is effected with the apparatus illustrated in Figure 5, using an 8 1/2 inch diameter steel idler roll 11 internally heated with hot oil and a 10 inch diameter driven rubber backup roll 12 (whose rubber surface has a Shore A hardness of about 80). The hot roll 11 is mounted for free rotation on an adjustable support 13 which can be raised or lowered to open or close the nip between the hot roll 11 and the backup roll 12 to the desired degree.

The macro-apertured web W wound on a supply roll 14 is drawn off that roll and over an idler roll 16 and onto the microporous sheet M carried by a roll 17 while the microporous sheet M is drawn off from its supply roll 18, onto a five inch diameter slotted expander idler roll 19 (which functions to avoid creasing or wrinkling), then over an idler roll 21 and the 4 1/2 inch diameter idler roll 17 and then onto the fibrous fabric FF which is supported on the heated roll 11. At the same time the fibrous fabric is unwound from its supply roll 22, passed over idler roll 23 and onto the hot roll 11 which has a surface speed of about 2.3 feet per minute; it is in contact with the hot roll for about 1/2 turn of that roll to preheat the fabric, before it is contacted by web W and microporous material M. The resulting assembly of microporous material and fabric is thereafter on the hot roll for about 2/5 turn of that roll. It then travels over cooling rolls 24, 26 to a windup roll 27.

The hot roll has a surface temperature of 340—350°F (170—177°C). The pressure at the nip is of the order of about 30 to 40 pounds per lineal inch (about 5 to 7 kg/cm) and is such that the effective width of the nip (owing to yielding of the rubber of backup roll 12) is about 3/4 inch (about 2 cm). The tension (exerted by the pulling effect of the backup roll) is such that the macro-apertured web W stretches up to about 10% (measured by marking a fixed length of the supplies of web W and sheet M and then measuring the distances between these marks in the laminate).

The melting-sticking point of the macro-apertured web is less than the melting-sticking point of the microporous structure (e.g. ~120 vs. ~160°C. It is also well below the melting temperature of the polyester (polyethylene terephthalate) fibers of the fabric (>250 °C).

In the process the macro-apertured web W is heated, on hot roll 11 by heat transferred from and through the pre-heated fabric F, while the web W is held in place on the fabric and maintained in its substantially continuous lace-like configuration by the microporous sheet. If the web W (which, as previously noted is made by a stretching process) is laid onto the preheated fabric as described, while unrestrained by the microporous sheet and while under the tension resulting from the pulling of the structure by the action of the nip (and the frictional contact with the fabric F) its fibrous structure or network tends to break up into individual spaced lumps even when its temperature is still well below its melting temperature and well below the temperature at which it forms a substantial bond to the fabric. But when it is in contact with the microporous sheet at this stage, the network does not break up but instead adheres to, and forms a bond with, the microporous sheet. Then on further heating and passage through the nip between rolls 11 and 12 under high pressure the heat-tackified network material is deformed around fibers of the fabric (as can be seen in Figure 3: see also Figures 9 and 18B). The resulting hot laminate is cooled while avoiding small-radius changes in direction (which could exert delaminating forces before the bond between the fibers and the polymer has been set by cooling).

In this Example the web W comes into contact with the microporous material when the web temperature is still below the above-mentioned network-breakup temperature of the web. At some stage in the process the web temperature is sufficiently high to cause the polyurethane of the macro-apertured web to form a physico-chemical bond with the polyurethane of the microporous structure. Thus, at that stage the microporous sheet carries, in effect, integral projections of lower-melting polyurethane in a web, or network pattern on its surface. When the temperature is then raised above the melting point of this lower-melting polyurethane, the network does not break up into lumps but flows plastically to embed therein fibers of the fabric. The maximum temperature attained at the surface (of the microporous material) being laminated (which temperature may be measured by inserting a piece of temperature-indicating paper on said surface so that the paper is carried through the laminating process) is above the melting point of the polyurethane of the macro-apertured web but well below the melting

point of the microporous polyurethane at said surface. It is also below the temperature at which the microporous structure collapses, even under the high pressure in the nip (i.e. below the "collapse temperature" measured at the nip pressure).

The macro-apertured web used in this Example has a thickness of over 3 mils (i.e., over about 0.08 mm) and less than 5 mils (about 0.13 mm), such as about 3.5—4 mils and has a unit weight of over 0.5 oz/yd² (17 g/m²) and less than 0.8 oz/yd² (27 g/m²) such as about 0.55 to 0.65 oz/yd² (about 18 to 22 g/m²). This provides sufficient material, in sufficient local concentration, to effect strong embedment of the fibers. The web has substantially no apertures which are more than 10 mm across (preferably substantially none are above 7 mm across) in any direction. This helps to give a laminate that is not subject to local internal separation or gapping (between bond lines or zones). While there is noticeable anisotropy in the macro-apertured web (in which, it having been formed by stretching, most of the apertures are longer in the "machine" direction, lengthwise of the web, than in the cross direction, as can be seen in Figure 4), it is nevertheless found that the resulting bond has substantially equal strength in the machine direction and the cross direction. However, undue further stretching in the machine direction (e.g. by more than 10%) does cause some significant anisotropy, which is undesirable for many purposes. Tension control may be effected by various techniques as by control of let-off brakes acting on the supply roll for the web W.

EXAMPLE 2

In this Example the apparatus of Figure 6 is employed. The materials used are the same as in Example 1, except as noted. The fabric F passes from its supply roll around one or more idler rolls 31 and then around a series of pre-heating rolls 32 which are internally heated, with hot oil, at a temperature of 325°F; as will be seen from the drawing, they apply heat alternately to the two faces of the fabric. At the last hot roll 32A of this series the pre-heated fabric is brought into contact with an assembly of the macro-apertured web W and the micro-porous sheet M, then the three-layer assemblage passes around a roll 33 and then a heater roll 34 which contacts the fabric F of the assemblage and is at a temperature higher than that of the pre-heating rolls, and then over an idler roll and onto a final heating roll 36 internally heated with steam at a temperature of 350°F and then through the nip between that roll 36 and a rubber-covered back up roll 37 (the force at the nip being 60 pounds per lineal inch) then around cooling cans 38 and idler rolls 39 to a windup roll.

The webs W and M are passed from their respective supply rolls 41, 42 to an idler roll and then (if required by the available equipment) over other idler rolls 43, 44 to the pre-heating roll 32A.

In one run the temperature of heater roll 34 is about 360°F (182°C) and the speed is such that the time of contact with that roll is about 0.1 minute, the temperature of the heater roll 36 is about 325—350°F and the time of contact therewith is about 0.2 minute.

All the webs are pulled over the various rolls by the force exerted, at the nip, by the driven backup roll 37, which also causes the hot roll 36 to rotate. The rolls 32, 32A, 33, 34 may be independently driven at surface speeds slightly less (e.g. 1% less) than that of backup roll 37 to insure that the fabric F makes a tight wrap around those rolls thus facilitating heat transfer to the fabric. The tensions in the fabric F and webs W and M are controlled by appropriate adjustment of brakes on the supply rolls. The web W is under tension which tends to stretch it lengthwise and cause it to decrease in width; preferably this tension is so controlled (as by the braking) that the resulting lengthwise stretch is less than 10% and the consequent decrease in the width of web W is well below 15% (e.g. from a starting width of 44 inches, the web necks down to a width of no less than 39 or 40 inches). The microporous sheet M is also maintained under tension, preferably at a level such that it stretches less than 5% (e.g. 2 1/2—3%) in its passage to the nip.

The particular sheet of microporous material used in this Example 2 has small spaced projections on the face which comes into contact with the web W and fabric F. It is a 30 mil (3/4 mm) thick sheet made by mechanically splitting (in half) a 1.6 mm thick white-pigmented coagulated, leached and dried microporous polyurethane sheet made by a casting process (described in U.S. patent 3,860,686) in which such spaced projections are, incidentally, formed on the lower face of the sheet. (Figures 6 to 8 of U.S. patent 3,860,680 illustrate the pattern of projections formed on one type of casting belt.) Figures 7 and 8 of the present application show a pattern of projections which is essentially like that of the material used in this Example (those Figures 7 and 8 are actually views of another microporous layer which differs from the layer used in this Example, in density and melting point). In Figure 7 the spaces 51 are formed by the parallel warp wires of a square woven wire casting belt on which the product is formed, while the arc 52 is a depression formed by a weft wire, which runs transverse to the warp wires of the belt and is interlaced with these warp wires, in a plain ("one up and one down") weave. The diameters of the wires are about17 mils (warp), 8 mils weft and

there are about 36 warp wires per inch and about 68 weft wires per inch). Thus, behind the plane of Figure 7 there is another arcuate depression (53 shown in Figure 8) of the same shape as the depression 52 but in staggered relation thereto.

Figure 9 indicates that the bond between the microporous material and the fibrous fabric is largely localized at the outer portions of the previously mentioned small spaced projections. Nevertheless it is a very strong bond.

EXAMPLE 3

The laminate of Example 2 is passed around an idler roll 54 (Figure 10) and then around a driven roll 56 and around a driven heating roll 57, then over a roll 58, to the nip between a heated embossing idler roll 59 and a rubber-surfaced backup roll 61 which is pressed against the embossing roll, and then, over cooling rolls 62 to a driven takeup roll 63. The surfaces of rolls 57 and 59 are at about the melting-sticking temperature (discussed below) of the microporous polyurethane. The exact temperatures of the roll surfaces are not known and the temperatures given here are rough approximations. Roll 57 is internally heated with oil (at about 350°F); roll 59 is internally heated with steam (at about 345°F). The backup roll 61 is driven at a surface speed about 1% higher than that of the rolls 56, 57 so that the material is pulled and therefore pressed closely to the surface of the latter rolls. On the heating roll 57 the residence time (of contact between the surface of the microporous polyurethane material of the laminate and the hot roll surface) is about 6 seconds; the laminate is under lengthwise tension but this does not cause significant thinning or compression (in thickness) of the microporous material. At the nip, the laminate is compressed considerably against the hot surface of the embossing roll which is also at a temperature close to the sticking temperature. This embossing roll has a pattern of surface ridges conforming to the surface grooves or veins in grain leather, and the localized pressure exerted on the microporous material by these ridges is sufficient at this temperature to cause the microporous material to tend to adhere to the surface of the embossing roll after it leaves the nip; thus when the speed of the takeup roll 63 is adjusted so that there is practically no tension on the laminate leaving the nip, the laminate (see also Figure 11) stays on the surface of the rotating embossing roll 59 for a short distance. The microporous surface becomes embossed, in that it has a distinct grain pattern of grooves or lines like that of grain leather but no continuous skin is formed on the microporous surface. In fact, even after the embossed material has been given a colour coating (i.e. two white pigmented coatings of elastomeric polyurethane each applied, by gravure printing from a gravure roll whose surface has conventional tiny coating-containing cups or hollows uniformly distributed thereover, the amount of each coating applied being 2.5 grams of polyurethane per square meter), the surface of the embossed material is still devoid of any continuous skin. See Figures 12 and 12A which are top views of the embossed and coated material and compare them with Figs. 13 and 13A which are similar views of the untreated surface. It will be noted in Fig. 12 that there are some areas in which localized compaction appears to have occurred to a larger degree but without significant destruction of the essential open pore structure.

During the treatment described in this Example the entire microporous layer is exposed to heat. At its outer surface the temperature is at about its melting-sticking temperature. At the fabric-bonded face the temperature is below the softening temperature of the lower-melting, polyurethane of the web W. After leaving the nip the microporous polyurethane is not subjected to any significant tension while hot, but is permitted to relax. It is believed that this effects an annealing of any stresses and strains such as those imposed by pulling of the material lengthwise during manufacture or processing (e.g. during the laminating step), and that such annealing helps to impart to the material a softer, leather-like hand, rather than a "plastic" feel. It is noted that at times the laminate will have a tendency to curl, with the microporous polyurethane being on the concave side (particularly when the microporous polyurethane web M has been pulled more than desired during the laminating step) and that such curl is significantly reduced or eliminated by the effects of the embossing.

The product of Example 3 has outstanding utility for uppers of sport shoes (such as tennis shoes) made by a process involving conventional injection molding of the sole of the shoe to the insole and the upper. In that process the sole is formed in a cavity whose upper wall includes the lower portions of the upper; the sole-forming material (which, in reaction injection molding, may be a reactive polyurethane) is injected into the cavity, displacing the air in the cavity. To expedite the process the upper material must be highly permeable to the displaced air, especially when low injection pressures are employed. The highly open surface shown in Figures 12, 12A and 14 permits rapid air transmission at a pressure difference of say 1000 mm of water (such as a permeability of 50,000 liters of air per square meter per hour at 20°C); in contrast, the same material subjected to more drastic embossing (Figures 30 and 31) has much lower air permeability.

Typical products of Example 3 (having a unit weight of 14.7 oz/sq yd, thickness of 0.062 inch, specific gravity 0.32, ultimate elongation of over 100% in all directions) have high tear strength, high water vapor permeability, outstanding abrasion resistance and resistance to flexing and exellent washability.

As mentioned above, the material may be color coated, as by gravure printing, after embossing. One such coating is an off-white (or grey) made up of 215 parts of Verona Impranil D392 (described below), 480 parts of Permuthane U—23—336 (also described below) 61 parts of a white color concentrate (Verona White PP901) and very small amounts of red, black and blue color concentrates, plus 223 parts of a 1/1 toluene/isopropanol blend.

EXAMPLE 4

A sheet of Mylar (Registered Trade Mark) (polyethylene terephthalate) film about 1 mil (25 microns) in thickness and having a shiny surface is drawn off from a roll thereof and printed, by direct gravure printing in a "spray" ground pattern, with a black-pigmented solution of thermoplastic elastomeric polyurethane of relatively high modulus in a volatile solvent. The printed sheet is heated to remove the solvent, leaving a dry non-tacky mottled gray deposit having a thickness of less than 0.2 mil (less than 5 microns). This deposit is transparent; thus when the coated sheet is laid onto a newspaper it is easy to read the printed words of the newspaper through the printed sheet, as illustrated in the enlarged photograph Figure 15. Figure 15 also shows the "spray" pattern which gives the same overall mottled effect as a light non-uniform spray. Figures 15A and 15B are views of this first coating at different, much higher, magnifications.

The sheet is then given a second gravure coating on top of the first one, this time with a burgundy pigmented solution of thermoplastic elastomeric polyurethane which is softer (of lower modulus) and has a lower melting point than the previously applied polyurethane; the coated sheet is then heated to remove the solvent. The amount of this second coat is such that the total coating thickness (both coats) is less than 0.3 mil (less than 8 microns). The twice-coated sheet is still transparent and non-uniform by transmitted light (see Figure 16), but less so than the once-coated sheet. (The dot patterns seen in Figures 15 and 16 correspond to the pattern of the tiny coating-carrying "cells" of the gravure roll.) When viewed against a white background it appears pink with darker pink mottling. Figures 16A and 16B are views of the resulting coating at different, much higher, magnifications. The coated sheet is rolled up for storage.

Both coatings are found to be tightly bonded to the Mylar film; they are not visibly affected by scraping with one's finger nail.

The coated sheet is then used for applying a thin skin to the top (microporous) surface of the laminate of Example 1.

In the skin-applying step the apparatus shown in Figure 17 is employed. In this apparatus the coated side of the Mylar film is brought into contact with the surface of the microporous layer and heat is transferred through the film to the coating and microporous surface while pressure is exerted on the assemblage. The lower-melting second coating fuses sufficiently to bond the coatings to the microporous surface. More particularly the apparatus includes an 8 1/2 inch diameter steel idler roll 11, internally heated with hot oil, and the coated film S and microporous-surfaced fibrous laminate L are pulled onto this hot roll by the force exerted (on the assemblage of S and L by a 10 inch diameter driven rubber backup roll 12 (whose rubber surface has a Shore A hardness of about 80) which is in contact with the fibrous bottom surface of L. The hot roll 11 is mounted for free rotation on a conventional adjustable support 13 (which can be raised or lowered to open or close the nip between hot roll 11 and backup roll 12 to the desired degree) the support 13 being adjustably forced under pressure in a direction to urge the hot roll 11 against the backup roll. More particularly, the coated film (wound on roll 71) is drawn off over idler rolls 72, 73, then over a five inch diameter slotted expander idler roll 74 (which functions to avoid creasing or wrinkling), and then onto laminate L which is supported on the backup roll 12. At the same time the laminate L is unwound from its supply roll 76, passed over idler roll 77 and onto the backup roll 12. The resulting assembly of S and L is on the hot roll for about 3 to 5 seconds. It then travels over idler (cooling) rolls 78, 79 to a windup roll 81.

Roll 11 has a surface temperature which is believed to be of the order of about 345°F. The pressure at the nip is on the order of about 10 pounds per lineal inch and is such that the effective width of the nip (owing to yielding of the rubber of backup roll 12) is about 1/2 inch. Thereafter the Mylar film is stripped off (this requires substantially no force). Even though the hot roll 11 is an embossing roll, having a leather-grained dull outer surface, the product has a shiny surface (with a very light grain embossed therein) and the Mylar film still is very smooth to the touch and has a clear appearance (although it shows a faint grain pattern of fine creases). The material is given a marked leather grain appearance and feel by passing it through the nip between the rolls 11 and 12 and then over roll 11 in the manner shown in Figure 17

while the hot embossing roll 11 is maintained at a surface temperature believed to be on the order of about 345—360°C.

The product has a relatively dull, or "flat", leather-grained surface with a subdued aniline appearance. Its color is rich reddish brown and is much deeper and darker than that of the skin, because, it is believed, the dark surface of the original microporous surface shows through the skin, changing the pink color of the skin to a deep reddish brown color.

The structure of the skin and underlying microporous material is shown in Figures 18 and 18A.

The first coating on the Mylar sheet has the following composition:
"Impranil D 392" 277.3 parts; "Permuthane U—23—336" 641 parts, "Impranil PP—922 Jet Black" 81.7 parts. The Impranil D 392 is a solution of a light-stable elastomeric polyurethane sold by Verona Dyestuff Division of Mobay Chemical Corp.; it contains 30% polymer and 70% solvent (dimethylformamide/toluene/isopropyl alcohol 1/2/1.5 ratio); this solution is then diluted with a sufficient amount of a 1/1 toluene/isopropanol blend to reduce its viscosity to a suitable level (e.g. to a viscosity of 15 poise) for gravure printing. The Permuthane U—23—336 is a 14% solution of an aliphatic elastomeric polyurethane in a mixture of methyl cellosolve, toluene and isopropyl alcohol. The Impranil PP—922 Jet Black (also sold by Verona) is a pigment concentrate containing 7% pigment and 22.0% total solids, the 14% difference being dissolved cellulose acetate butyrate ("C.A.B."). The Impranil D392 comprises a very hard clear polyurethane and, if used alone, gives a very glossy coating, while the Permuthane U—23—336 contains a conventional flatting or dulling agent and also has a lower viscosity. By using a mixture of these, as described, the final product has a medium gloss, good face-to-face slip, good hand and good flexing, good blocking resistance and good release from the hot embossing roll. As can be seen from Figure 15 the deposit of the first coating is not uniform; the average amount of solids deposited is in the range of about 2 to 3 (e.g. 2.5) g/m^2. The solvent removal after printing is effected in an oven at about 70°C for 2 minutes.

The second coating on the Mylar sheet has the following composition: "Witco Y 343" 504.3 parts, red-blue pigment concentrate 214.3 parts, 1/1 toluene/isopropanol mixture 281.4 parts. The Witco Y 343 is a 35% solution of a non-discoloring thermoplastic elastomeric polyester polyurethane in a 15/35/25/25 blend of toluene/isopropanol/DMF/methyl cellosolve. The pigment concentrate contains 9.3% pigment and 10.86% of a mixture of C.A.B. and the elastomer of Witco Y343; The average amount of solids deposited in the second coating is in the range of about 2 to 3 (e.g. 2.5) g/m^2. The solvent removal after printing is effected in an oven at about 70°C for about 2 minutes.

In the coatings the polymers are most preferably of the well known nondiscoloring type, resistent to discoloration by ultraviolet light. Such materials are well known in the art and are commercially available.

EXAMPLE 5

Example 4 is repeated except that the Mylar film has a thickness of about 0.4 mil (about 10 microns) and the skin applying and final embossing are effected in a single step, using the same dull grained surface embossing roll as described in Example 4 operating under similar embossing conditions but with the embossing roll in contact with the Mylar film. The product is similar to that of Example 1 but has a much more lustrous surface and a shallower grain.

EXAMPLE 6

Example 5 is repeated, except that the Mylar film is a commercial film having a dull surface to produce a grained-surface product having a subdued luster.

EXAMPLE 7

In this Example a film of Mylar about 0.5 mil thick is coated with two thin polymeric layers: (a) the layer first deposited on the Mylar film (which is to form the outer skin surface of the artificial leather) is of a hard relatively inflexible polymer, such as polymeric methyl methacrylate, (b) the second layer (which is to serve as the thermoplastic adhesive which bonds the first layer to the microporous surface), is of a flexible polymer, preferably an elastomeric polyurethane such as a polyester polyurethane made from ethylene glycol (or other glycol), adipate polyester and hexamethylenediisocyanate. To promote release of the Mylar on heating the Mylar may first be coated with a very thin layer of a release agent such as a hydrocarbon wax (e.g. a paraffin wax or microcrystalline wax). The two skin-forming layers may each be applied to the Mylar film as solutions in solvents, which are then evaporated off as in Example 4. The total thickness of the two layers is about 3 1/2 mil or about 13 microns as will be seen in Figures 20A and 21A, while the thickness of the harder layer (*a*, above) is less than 5 microns such as about 1 to 2 microns.

The coatings on the Mylar film are transferred to the microporous surface of a laminate like that described in Example 2 in a manner such as that described in Example 4; in this case the nip pressure is very low so as to avoid permanent compaction of the

microporous layer while the roll temperatures and roll contact time, are sufficiently high to effectively activate the adhesive qualities of the skin and thus bond the skin to the microporous layer. The Mylar film can be stripped off while the material is still hot, or stripped off later. Preferably it is stripped off hot, as shown in Figure 19; the still-hot skin and upper zone of the microporous layer may then be embossed with a minimum of reheating.

In the embossing step employed in this particular Example the laminate carrying the skin is passed into the nip between the previously described hot grain-surface embossing roll 11 and backup roll 12 (with its skin in contact with the hot roll 11) and remains stuck to roll 11 (whose surface temperature is probably in the neighborhood of 360°F for a period of some 5 seconds before it is drawn off. Two different draw-off systems are employed:

(A) In one, as shown schematically in Figure 11 the material being drawn off forms a loop with the hot microporous layer on the convex side, and the material is drawn off from that loop at a rate carefully controlled to maintain the running material in that loop form (just as it leaves the hot roll) under substantially no tension.

(B) In the second system, shown schematically in Figure 11A the material is drawn off under tension and the loop is maintained by the presence of a guide bar 91.

In both cases the resulting material had a well-formed leather grain appearance. Figure 22 is view taken at 45° of the material made by process A. Figures 23 and 23A (at a higher magnification) are similar views of the material made by process B.

In both cases there is substantially no compaction of the microporous layer. The thickness of the product in each case is about 62 mils before embossing and about 62 mils after embossing and cooling. The structure of the materials made by processes A and B are shown in the cross-sectional views in Figures 20 to 20C, (for A) and 21 to 21C (for B).

In both cases it will be seen that the harder outer layer of the skin tends to break into plates, especially on flexing in use, (see Figure 20B and 21A for instance); these are held firmly by the elastomeric lower layer.

The material made by process A has a much more pleasant, softer leatherlike hand. Its fibrous layer is not taut but so free of tension that it shows (in this case) slight puckering.

A sample of the material made by process B is retained in curved configuration (in the machine direction as in the loops in Figs. 11 and 11A) without tension in an oven at 150 °C for 10 min. then taken out hot and allowed to cool under a weight which keeps it flat. The material is found to have a feel and appearance like that of the material made by process A.

It is believed that the embossing effects shown in Figures 20 to 20C and 21 to 21C can be explained as follows: The microporous layer has a large void volume, well over 50% (e.g. about 70—75% for a layer having a specific gravity about 0.3), and is composed of thin walls of elastomeric material around its cells or voids (see Figure 1). It is thus relatively easily compressible; its cellular structure collapses, at least partially, resiliently under pressure. When (as shown schematically in Figure 24) the laminate having the skin thereon is brought into the nip between the metallic embossing roll 11 (which has embossing ridges 101) and the rubber-surface backup drive roll 12, the microporous layer 102 is squeezed at the nip and the rubber surface 103 of the backup roll is deformed. The pressure at the nip is sufficient under these conditions to force the embossing ridges 101 into the material and to cause the skin to conform closely to the very hot surface of the embossing roll. The temperature of that surface is such that if the material remained compressed in the nip for some time the microporous layer would become permanently compacted. However the rate of travel of the material, and its effective path length in the nip, are such that the time in the nip is very short (e.g. less than 0.1 second, such as 0.03 second) and, despite the fact that the solid skin provides relatively fast heat transfer (as compared to heat transfer at a wholly porous surface), it is found that such permanent compaction can be substantially avoided.

After the material leaves the nip its microporous layer expands to substantially its original thickness; the skin surface remains on the hot surface of the embossing roll for a period of time such that the skin and the immediately underlying portion of the expanded microporous material are molded to the configuration of the very hot surface of the embossing roll. See for instance Figures 20—20C. The hot embossing surface may be at a temperature well above the fusion temperature of the skin, and the contact between the hot embossing surface and the skin may be such that the laminate adheres to the embossing surface against the force of gravity as shown in Figure 29. (The penetration of the hot embossing ridges into the microporous layer and the resulting local plastic deformation of the latter may aid in supporting the laminate on the roll at this stage). For instance, the material may remain in contact with the surface of the hot embossing roll for about 1/3 or 1/2 of a revolution (120 or 180°) of that roll, for a period of time well over 1/2 second (e.g. about 1 or 2 to 6 or 10 seconds).

The temperature of the embossing surface

is generally within about 15°C (more preferably within about 10° or 5°) of the melting-sticking temperature of the microporous material. In one embodiment, the temperature of the embossing surface is at or above the melting temperature of the material of the skin (especially the material at the underside of the skin which is in contact with the microporous surface); it is best to have a release agent (such as the hydrocarbon mentioned earlier) at the outer surface of the skin to prevent undue sticking to the embossing surface. When such undue sticking occurs, all or part of the skin may remain on the embossing surface when the laminate is removed therefrom.

In one typical run the surface temperature of the steel embossing roll is about 165°C, the melting-sticking point of the microporous material is about 160—165°C, the melting-sticking point of the skin material adjacent to the microporous layer is about 160—170°C and the melting temperature of the macroapertured material is about 120°C. With a steel embossing roll having embossing ridges which project out about 10 mils from the base level of the roll surface, a backup roll whose rubber surface layer is about 3/4 inch thick and has a hardness of 62 (Shore A durometer), and a laminate which is about 60 mils thick and is compressible to a thickness of about 20 mils, the rolls are adjusted so that the rubber surface of the backup roll is just in contact with the outer edges of the embossing ridges and a stop is positioned to prevent the rolls from approaching any closer than that during operation (and, during operation, a force of about 7 lbs. per lineal inch of nip is applied across the axes of the rolls to bias them toward each other); the use of the stop in this manner effectively avoids undue local rises in pressure.

The conditions of embossing are such that there is a sharp temperature gradient between the embossing surface and the interface between the microporous layer and the fibrous layer, so that the lower-melting material derived from the macroapertured web is kept at a temperature below that at which it becomes mobile; the bond, at that interface, between the fibrous and microporous layers is substantially undisturbed. The use of relatively low pressures at the nip helps to preserve this thermal gradient; at high pressures (with consequent higher compression of the microporous layer), the transfer of heat to that interface is much more rapid.

For any particular set of matrials and any particular piece of equipment the temperature, pressures and times will need to be adjusted, by trial-and-error, to arrive at the optimum operating conditions within the guidelines set forth herein. For instance, the thermal responses of different batches of similar polyurethanes may differ and the temperature level needed for sharp embossing may be some 5° or 10°C higher for one batch than for another even though they have similar melting-sticking temperatures. Even with the same batch, one may vary the embossing conditions. Thus for a material which embosses best at one temperature level one may, less desirably, use a lower embossing temperature (some 10 or 15°C lower) with a somewhat higher nip pressure, and consequent greater deformation of the rubber roll at the nip; such use of lower temperature and higher pressure usually gives a product whose grain pattern is not as sharp, and whose "break", hand, and moisture vapor transmission are not as good.

In Examples 4—7 above, the thin elastomeric skin is deposited onto a smooth strong plastic (Mylar) film of high dimensional stability and modulus and high softening temperature. The skin is applied to the microporous layer and the stable plastic film is stripped off. The step of applying the skin to the microporous layer may be effected under the very same conditions (e.g. pressure, temperature and time) as the subsequent embossing step, previously discussed. The hot roll may have the very same embossing surface, but (owing to the presence of the stable plastic carrier film) even then very little embossing of the material occurs at this stage (and the stripped polyethylene terephthalate carrier film remains shiny, flat and smooth to the touch, but may have a faintly visible embossed pattern of fine shallow creases). The support may also be a relatively weak, stretchy film of low softening temperature such as low density polyethylene film, especially if the skin-film compositie is handled carefully (as under controlled relatively low feeding tensions to avoid undue stretching) and the hot roll in contact with such film 30 has a non-adherent (e.g. Teflon) surface. Another suitable support is a film of stereoregular polyolefin such as polypropylene, e.g. biaxially stretched or extruded (cast) polypropylene film.

The skin in Examples 4—7, above, is quite thin (well below 20 microns) being below 15 microns in Example 7 and below 10 microns in Example 4.

The skin may also be stripped from its carrier film (or other carrier structure, e.g. paper) before the skin is applied to the surface of the microporous material and the desired steps of applying the skin and embossing may then be combined, using a single pass around the hot roll under the same conditions as described above. Since the unsupported skin is elastomeric, tender and stretchy, greater care is required for such an operation, such as finer control of feeding tensions. In such embodiments the carrier film may be stripped away and the unsupported skin may be rolled up for storage and

then unrolled when it is to be applied; alternatively the apparatus may have provision for stripping off the carrier film during the travel of the carrier skin composite from a supply roll to the hot embossing roll, e.g. the carrier film may be stripped off just before the skin comes into contact with that hot roll.

The same kind of process may occur in the absence of a skin, as in the process of Example 3. Comparison of Figures 1, 2, 13 and 13A with Figures 12, 12A and 14 indicates that fusion and spreading of the individual outer edges of thin polyurethane walls of the cellular structure occurs on contact with the hot embossing surface. Less desirably, substantially complete fusion of the outer surface may occur (as shown in Figures 33 and 34) when the contact time in the nip is unduly prolonged at a given temperature.

A typical leather grain pattern has relatively deep, broad and widely spaced intersecting "veins" whose depth is on the order of about 5 to 10 or 15 mils, and shallower "hair cells" which are small depressions having a depth on the order of about 1/2 to 1 mil, or more. The embossing roll has a corresponding pattern of vein-forming ridges and their cell-forming knobs of corresponding heights. In Figure 22 reference numeral 91 indicates a vein and numeral 92 indicates hair cells.

In the foregoing Example 7 the microporous material is dull black and the skin is pigmented a deep opaque black. It will be understood that other colour combinations may be used (e.g. a white skin on a white microporous layer). Also either or both layers of the skin may be transparent; they may be either clear or transparently or translucently pigmented (or dyed) in a colour, or colors, selected to augment or modify the colour of the microporous surface as in Example 4.

The surface of the microporous layer may be preheated, before it passes through the nip; e.g. that surface may be preheated to substantially its melting-sticking temperature and then passed through the nip between the embossing roll and the backup roll and then travel along the hot embossing roll. With such a procedure embossing may be effected at quite a rapid rate. A procedure of this type is described in Example 3 (and Figure 10) wherein a preheat roll 57 is employed. It has also been found that the carrier web (e.g. the Mylar film employed in Examples 4 to 7 may be stripped off just after the material leaves the hot skin-applying roll, while the material is still hot; the thus preheated skin-carrying laminate may be fed directly to the nip of the embossing roll, as illustrated schematcally in Figure 19.

In Figure 19, a supply of a laminate (of microporous layer and fibrous layer) is let off from a braked roll 105, passes over tensioning rolls 106 and an adjustable idler roll 107 while a supply of plastic film (e.g. Mylar) carrying the skin is let off from a braked roll 108 and fed to the hot surface of an oil-heated Teflon-coated roll 109. The laminate passes onto the skin on the hot roll 109, the assemblage passes through the nip between the backup roll 111 and the hot roll 109, then between idler rolls 112, 113 at which point the film is stripped off and wound up (on the roll 114) for re-use while the hot skin-carrying laminate passes on to the surface of the hot embossing roll 116, then through the nip between that roll 118 and a backup roll 117, then over adjustably located idler roll 118, idler roll 119 and roll 121 to the windup roll 122 which is driven by the roll 123. The arrangement of the rolls 121 and 124 serves to isolate the winding tension from the material passing over the roll 121.

The same apparatus may be used, with modifications, for the laminating, as illustrated schematically in Figure 19A, in which the rolled up supply of macro-apertured web is mounted on a roll 131 having a ball-bearing shaft and is fed over a short path (with substantially no tension) directly into contact at the idler rolls 132, 133 with the microporous sheet M which is being pulled, under tension from its supply (not shown) over tension rollers 106 and the idler roll 107 and the macroapertured web (carried by the microporous material) passes into contact with the heated surface of the fibrous web F which has been drawn under tension over tension rolls (not shown) and idler rolls (not shown) around a hot roll 116 and onto the surface of hot roll 102. The whole assemblage, with the fibrous layer in contact with the hot roll 109 passes around that hot roll and through the nip between the backup roll 111 and that roll 109.

EXAMPLE 8

This Example illustrates that hot-laminating and transfer of a skin to the microporous surface may be effected in a single pass over a hot roll and that the heat for the lamination may be transferred through the microporous layer to the fusible adhesive without collapse of the microporous material by suitable control. Referring to Figure 35 a film of Mylar, carrying skin-forming layers (as described in Example 7 above), is fed from its supply roll 141 over guide rolls 142, 143 to the hot surface of the 8 1/2 inch diameter steel idler embossing roll 11 internally heated with hot oil (e.g. at a temperature in the neighborhood of 345°F). At the same time the microporous sheet material M (wound on the supply roll 144 and fed around the idler guide roll 146), the macro-apertured web W (wound on the supply roll 147) and the

fibrous backing F (wound on the supply roll 148 and fed around the idler guide roll 149) are all drawn off their supply rolls to an idler guide roll 151 at whose surface they are assembled together. (The supply roll for the macro-apertured web is placed as close as possible to the assembly point to reduce necking down of that web as it passes from the roll 147 to the roll 151). The assemblage is fed onto the heated skin on the embossing roll so that the microporous surface adheres to the skin as the whole assemblage passes around the embossing roll and through the nip between that roll and the 10 inch diameter driven rubber-surfaced backup roll 12, after which the material is drawn off as in Example 1. At a driven roll speed of about 3 feet per minute there is a good grain pattern but the microporous structure is drastically collapsed; when the roll speed is increased to about 5 fpm the microporous layer of the resulting product is not as collapsed but shows little, if any, leatherlike "break". But when the roll speed is increased to about 9 fpm a good leatherlike "break" is obtained (with little grain embossing) while retaining good adhesion between the fibrous and microporous layers. The surface is then embossed (e.g. in the manner described in Example 7) to provide the grain pattern.

While the illustrations show the backup roll below the embossing roll, it will be understood that these rolls may be side-to-side or the backup roll may be above the embossing roll.

For best results the surface temperature of the hot rolls (particularly the embossing roll) should be carefully controlled. To this end, the internally heated roll should have a relatively thin outer wall (e.g. 3/4 inch thick steel) and the heating fluid, such as oil, should be circulated at a relatively rapid rate to maintain a relatively uniform temperature over the entire roll surface; typically the fluid circulates through a cylindrical annular space whose outer boundary is the annular cylindrical outer wall of the roll, and there is a vane (or vanes) to cause the fluid to flow in a spiral path along that wall. The equipment also preferably has suitable devices for maintaining the webs or sheet materials in alignment as they are fed to the zone where they are brought into contact with each other, and devices for trimming off edges (where owing to misalignment, the desired lamination or bonding has not occurred). The hot roll used for laminating may have a non-stick surface (e.g. a surface coated with polytetrafluoroethylene) so that it will not be marred by contact with mis-aligned macro-apertured adhesive web material.

As previously mentioned, the embossed material is preferably taken off the embossing roll in a reversely curved path to effect the relaxation previously described. Apparently the contact with the hot roll causes sufficient transfer of heat into the main body of the microporous layer so that its temperature while in the zone Z (Figure 24) is sufficiently high to effect that relaxation under the circumstances. Very good results have been obtained when the arc formed in zone Z has a relatively small radius (e.g. well below 2 inches such as about 1/4 inch or 1/2 inch) and the time of travel around that arc is relatively short (e.g. as low as 0.3 seconds or less, although of course longer times may be used). The position of the arc may be pre-set, as by positioning a guide bar (e.g. a 1/2 inch diameter rod) as shown in dotted lines in Figure 11. The guide bar may be freely rotatable to make sure that the material is not drawn around it under a significant tension.

The preferred microporous materials are produced by coagulating at least one layer of a solution of elastomeric polyurethane in a liquid solvent (e.g. by contacting the layer of solution with a non-solvent or coagulant which is miscible with said solvent); methods of this type are well known in the art. As indicated in Example 2, a temporary support used in this process may have a surface so patterned as to form the projections during this process. The temporary support need not be a fabric; it may, for instance, be a coagulant-permeable plastic having apertures, or valleys, for forming the projections. The microporous structure generally has a specific gravity in the range of about 0.3 to 0.5; preferably at its upper portion (to which the skin is to be adhered) its specific gravity is in the range of about 0.3 to 0.4. As indicated previously, the microporous layer, whose thickness is preferably within the range of about 10 to 50 mils, such as about 20, 30 or 40 mils, (about 0.5 to 0.1 mm) may be made by slitting a thicker coagulated sheet (which may, for instance, be 1, 2 or 3 mm thick), thereby exposing, at the slit surfaces, the interior structure of the coagulated material. That interior structure is often more open and more uniform than the structure at the original outer surfaces of the thicker coagulated sheet. It is preferred to arrange the microporous layer in the laminate so that a slit microporous surface is at the outside (to receive the skin and/or embossing) and the original surface (if any) of the sheet is at the inside, adhered to the fibrous layer. One may also use a sheet made by coagulation of a layer (of polyurethane solution) which is sufficiently thin to provide the desired 10 to 50 mil sheet thickness directly, without slitting; in that case the outside surface of the microporous layer of the laminate may have, of course, a coagulated surface structure. The structure of a surface of that type is seen in Figures 3 and 4 of Civardi et al U.S. patent 3,764,363, which are plan views of the surface and in Figure 2 of that patent, where

the cross-section at the surface is shown. Comparison of those views with Figures 1 and 2 of this application shows that the coagulated surface structure is less open and the cavities just below the surface are partially covered by a micro-apertured skin. Experiments thus far indicte that in the embossing of a laminate having a microporous layer whose outside surface has the less open coagulated structure it is preferable to maintain the embossing roll at a lower temperature (e.g. at about 155—160°C) and the pressure at the nip at a higher value (e.g. some 100—200% higher such as at about 15 pounds per lineal inch) than is the case for the slit-surfaced material; in one run the post-nip residence time on the hot roll is about 10 seconds.

The preferred polyurethanes for the microporous material are those described in U.S. patent 3,709,864, particularly those having nitrogen contents above about 4%, more preferably containing about 4 1/2% N. Usually the melting-sticking temperature of the microporous polyurethane is well above 120° or 130°C and below 200°C such as about 155 to 175°C.

In the foregoing Examples the fibrous sheet is a needle-punched non-woven fabric containing a binder. The binder (e.g. in amount of 2 to 40%) aids in bonding the fibers of the fabric together (e.g. one may use a non-woven fabric whose fibers have been treated with a latex of an elastomer, such as butadiene-acrylonitrile copolymer, as is well known in the art). The fibers of the nonwoven fabric may be interlaced in other ways, e.g. by entangling fibers with water jets, the fabric being held together solely by the fiber to fiber friction; also the fibers may be interlaced into a woven or knitted fabric (e.g. two layers of a nonwoven fibrous structure may be needle punched through a central reinforcing open weave, scrim, fabric). The fibrous fabric may be woven or knitted (e.g. of multifiber yarns) and in that case it is desirable that the fabric face being laminated have exposed individual fibers or small groups of fibers which can become embedded in the fused projections of the microporous material; thus a surface of a woven fabric may be sanded, or otherwise treated, to raise a light nap of spaced individual fibers thereon. A fabric of the type described in U.S. 3,988,488 having a bonded nap (on the side opposite that facing the microporous layer) may be employed; here again it may be desirable to nap, at least lightly, the un-napped face (Figure 5 of 3,988,488) before laminating, so as to facilitate embedment of fibers into the fused projections. The fabric is preferably such as to impart additional strength to the microporous material, or in some cases to provide the principal tensile strength of the laminate. Preferably also its presence imparts to the laminate a higher tangent modulus at 15 or 20% elongation, a property which appears to be significant in the consistent lasting of shoe uppers.

One type of preferred fabric is a nonwoven structure of entangled or ligated individual fibers (e.g. of about 1 to 5 denier) having a high degree of "vertical" entanglement and interlocking (which is produced by needling a batt of staple fibers, either by the use of solid needles, usually having fiber-moving barbs, as in U.S. patents 3,090,099, 3,090,100 and 3,206,351, or by the use of fluid needling jets as in U.S. patents 3,214,819; 3,485,706, 3,508,308 and 3,620,903); preferably the fabric has little or no binder which would tend to stiffen the fabric and make it less pliable (less than 30% binder and more preferably below 20%, e.g. 0, 5 or 10% elastomeric binder). Certain fabrics of this type, such as those sold under the names Nexus and Sontara, usually are anisotropic, having considerably higher strengths and moduli in the "machine direction" than in the cross direction; these may be reshaped to make them more isotropic in use or they may be used without reshaping. In the latter case the laminated product will be cut anisotropically (as is done with the leather customarily used for shoe uppers), by the shoe manufacturer, into shoe upper blanks in which the lasting-pulling direction corresponds to the machine direction of the fabric. In either case, the laminate will have a tangent modulus at 15 or 20% elongation in the lasting-pulling direction which is significantly higher (e.g. 50% or 100% higher) than that of the microporous layer alone, whether measured at room temperature (e.g. 23°C) or at elevated temperature (e.g. dry at 80°C or in steam at 100°C). The fibers are generally close together; thus as can be seen in Figure 3 a plurality of individual fibers may become embedded within a small portion of fused material, on laminating. The Nexus and Sontara fabrics usually have high elongations at break (e.g. about 50% or more even in the machine directions).

Another fibrous fabric which may be employed is the material described as a "melded fabric" in the article on "Cambrelle Melded Fabrics" by Sudnik which appears at pages 34—39 of Textiles (pub. by Shirley Institute) June 1976 or described in British patent 1,245,088.

The fibrous web employed in Examples 1 and 2 has a high degree of fiber entanglement resulting, in part, from the use of a high density of needle punches, and also has a substantial degree of fiber bonding, due to the presence of the binder; its woven scrim is situated between two layers of fibers. It has been found, surprisingly, that one may obtain very good results by the use of a fibrous

web in which the degree of fiber entanglement is very appreciably lower, in which there is substantially no binder and in which the scrim may be omitted, or situated as before, or situated at or just below the surface of the web. As shown in Example 9 below, the fibrous web may have a very low specific gravity prior to laminating, and the heat and pressure of the laminating process may itself be employed to densify the fibrous layer. This makes it possible to employ very economically produced loose fibrous webs (such as needle-punched webs having specific gravities well below 0.2, (e.g. below 0.15 or even below about 0.1) with attendant significant cost savings.

EXAMPLES 9A to 9D

Example 9A

A loose fluffy staple fiber batt weighing about 4 ounces per square yard (about 100 g/m^2) and having a thickness of (very roughly) about 2 to 3 mm, as viewed from a cut edge thereof, is needle punched to a square-woven open scrim of yarns (woven about 8 ends per cm in each direction) weighing about 1.7 ounces per square yard (about 40g per square meter). The needle punching is effected by means of the usual barbed reciprocating needles. Each needle is pushed into the batt (from its face which is not in contact with the scrim) in one direction (say "upward"); its barbs engage one or more of the fibers and it thus forces those fibers through the batt and through the openings in the scrim. Then the needle is moved in the opposite direction (say "downward") and thus withdrawn back through the scrim and fiber batt, leaving fiber loops extending through the scrim and forming a sort of nap (principally of loops) on the free face of the scrim. The barbs are small pointed or flared extensions or projections of the needle; they are open "upward" to catch fibers on the "upward" stroke and leave them in place on the "downward" stroke. There are about 300 to 350 more or less randomly located needle punches per square inch of the batt surface. The needle punching causes about ½ oz/yd^2 of staple fiber to project from, or lie on, the free face of the scrim.

The staple fiber batt is made of conventional polyester (polyethylene terephthalate) staple fibers of about 2 denier per filament about 1 1/2 to 3 inches long; the fibers are crimped, as is conventional, as seen in Fig. 25, having about 12 crimps per inch. The scrim is woven of yarns made of polyester staple fibers.

The scrim face of the needle-punched material is laminated to a web of microporous polyurethane about 20 mils thick having a specific gravity of about 0.33 and having the microporous structure shown in Figures 1 and 2, made by mechanically slitting a thicker sheet as described in Example 1. The laminating is effected as in Example 1 or 2, using the macro-apertured web of elastomeric polyurethane. The resulting laminate has excellent strength, softness and tear resistance, despite the relatively small extent of fiber entanglement (the density of needle punches, about 300—350 per square inch, is much less than that employed in the making of the needle-punched material used in Examples 1 and 2). This indicates that the bonding at one face, but the lamination, greatly improves the coherency and strength of the relatively loose needle punched material. The fibrous material is compacted considerably; the thickness of the laminate is about 48 mils while the thickness of the original needle-punched fibrous structure is about 86 mils (as measured with an Ames 560 series thickness gauge according to ASTM D1814—70).

Figures 25 to 26A are photomicrographs, all taken edge-on, with a light microscope, of the needle punched material of this Example.

In the view at low magnification, Figure 25, the general arrangement of fibers and scrim before lamination is apparent. In Figure 25A which shows a portion of the same structure, at higher magnification, one can see a group of fibers which have been acted on by the punching needle to more or less align them transversely to the web and to force them through the scrim.

The laminate is seen at the same two magnifications in Figures 26 and 26A. The bonding effect that the lamination has on the fibers is seen in Figures 27 to 28A. Figures 27 and 27A are views of thin cross-sections made by embedding the laminate in a water-soluble medium and then making a slice with a microtome; the tight cluster of fibers at the center of each view is a thread of the scrim. Figures 28 and 28A show the same cross-sections after the water-soluble embedding material has been dissolved away; it will be seen that fibers are still bonded to the microporous material M by fingers of adhesive (as at 160) which extend some distance into the fibrous structure and encapsulate portions of the fibers. It will be understood that in most cases these encapsulated portions are parts of individual fibers which (out of the planes of the thin slices shown in Figs. 28 and 28A) extend transversely through the fibrous web (although some of the encapsulated portions are parts of individual fibers of the scrim threads which extend longitudinally of that web). Thus when one gently teases individual fibers from the fibrous side of the laminate, one end of the teased fiber generally remains anchored to the laminate; in contrast one can readily tease out and remove (without fiber breakage) individual fibers of the needled material before laminat-

ing.

B. Example 9A is repeated using about 250 to 300 needle punches per square inch and impregnating the needle-punched structure with about 5 or 10% of its weight of an elastomeric binder (e.g. a butadiene-acrylonitrile rubber) which is applied as an aqueous latex and then cured.

C. Example 9B is repeated using about 500 needle punches per square inch.

D. Examples 9A—9C are repeated using a microporous material about 30 mils (instead of 20 mils) thick.

In the laminating procedure used in this Example 9, the loose fibrous web is passed under tension around a hot roll having a temperature of, say, about 345 to 380°F (about 170 to 195°C) and then through the nip between the hot roll and the locally deformed rubber surface of the backup roll. It is known that at these temperatures a batt of polyester staple fibers tends to shrink. In the procedure used herein the batt is restrained against shrinkage in area (as by the pressure exerted thereon by the tensioned microporous sheet and, then by the nip pressure and the anchoring and binding action of the macroapertured adhesive, as well as the stabilizing effect of the scrim). In the nip, owing to the deformation of the rubber surface of the backup roll and the consequent variations in the linear speed of that surface, the compressed assemblage of batt and microporous material may be subjected to shearing forces, first in one direction and then in the other, which may have some compacting or felting effect on the batt.

The needle punched structure used in this Example 9 contains (as previously mentioned) about 4 ounces per yard of relatively loose staple fibers (not counting the staple fibers which are in twisted compacted form in the yarns of the scrim) and is about 86 mils thick; the specific gravity of the loose staple fiber in the needle-punched structure is thus well below 0.2, i.e. below 0.1. specifically about 0.07. In the process this loose staple fiber becomes compacted and set, so that the specific gravity of the loose staple fiber in the final product is well above 0.15, i.e. above about 0.2, specifically about 0.24.

As previously noted, products of various thicknesses may be produced by the system described herein. Generally for shoe uppers an overall laminate thickness within the range of about 40 to 80 mils (about 1 to 2 mm) is desirable for men's shoes and an overall thickness within the range of about 35 to 50 mils (about 0.8 to 1.2 mm) is desirable for women's shoes. For upholstery it may be about 20 to 40 mils (about 0.5 to 1 mm).

As previously noted, in the preferred process a thin preformed skin is laminated to the outer surface of the microporous layer, or that outer surface is directly embossed without a skin (giving a product having a dull, suede-like appearance). Alternatively, the outer surface of the microporous layer may be finished in other ways before or after it is laminated to the fibrous material. Thus a thin skin (as of elastomeric polyurethane) may be applied by spraying or printing. The presence of this skin usually reduces the moisture vapor transmission somewhat; for instance a material finished in this way may have an MVT of about 70 after finishing, as compared to an MVT of about 200 g/sq.m./hr. in the absence of the finish.

In the most preferred constructions according to this invention the fiber:elastomer weight ratio is in the range of about 0.8:1 to 1.2:1 such as about 1:1. (The weight of elastomer includes not only the weight of the microporous layer, which constitutes well over 50% of the weight of elastomer, but also the weight of binder that may be present in the fibrous layer which binder preferably makes up less than 30% of the total weight of elastomer). In the laminated product, the specific gravity of the fibrous layer (including any binder therein), is preferably below about 0.3, such as 0.28, 0.25 or 0.2, and above 0.1. This makes it possible to produce a shoe upper material whose lower layer is readily compressible in the shoe-making process (e.g. in lasting which involves significant bending of the shoe upper material at the toe portion, which bending compresses the fibrous underside of the shoe upper material) while also having sufficient cohesive strength to resist conventional shoe making forces without breaking. In such products the thickness of the microporous layer is, as previously mentioned, in the range of about 20 to 35 or 40 mils, and the thickness of the fibrous layer is at least about 20 mils such as about 25, 30, 40 or 50 mils or more. Preferably the total amount of fibers is in the range of about 2 or 3 to 6 ounces per square yard (such as may be provided by using a scrim weighing about 1 to 2 or 3 [e.g. 1 1/2] ounces per square yard, into which about 2 to 3 or more ounces per square yard of staple fiber have been punched) and the amount of added impregnant or binder, if any, is about 1/2 ounce or less per square yard. The weight of elastomer supplied in the macro-reticulated web is preferably in the range of about 0.4 to 0.8 ounce (more preferably about 0.6 ounce) per square yard.

In the following Examples the fibrous sheet to which the microporous layer is laminated in accordance with the invention is a combination of a cellular elastomeric sheet (such as the microporous sheets previously described) and a nonwoven fiber batt having fibers of said batt extending transversely into said elastomeric sheet.

EXAMPLE 10

In this Example a thin sheet of microporous elastomeric polyurethane is combined with a nonwoven polyester staple fiber web by needle punching fibers of the web into the microporous sheet. The microporous sheet is like that used in Example 1 except that its thickness is about 15 mils (3/8 mm). The nonwoven fiber web is the same loose fluffy batt (weighing about 4 ounces per square yard) used as a starting material in Example 9 and the needle-punching is effected in the manner generally described in Example 9 except that the fibers are punched into and through a microporous sheet. During the "upstroke" each needle punches a crater into the "lower" face of the microporous sheet and thus tears the microporous material locally, forming a small resilient flap or flaps of the elastomeric polyurethane; the flap presses against the fiber(s) in the hole to hold them frictionally. Figures 29 and 30 show the appearance of the "lower" and "upper" faces (respectively) of a microporous sheet from which the fibers have been removed mechanically (by peeling the fibrous batt away from the microporous sheet thereby pulling the frictionally held needled fibers back out of their holes in the microporous sheet). Figures 31, 31A, 32 show the needled fibers held in the holes. The needling is carried out to form about 300 to 350 more or less randomly positioned holes per square inch of the microporous sheet.

The upper surface is laminated to a microporous sheet as described in the earlier examples.

EXAMPLE 11

Example 10 is repeated except that a woven scrim of polyester fiber is placed between the nonwoven batt and the microporous sheet before needling, so that the resulting needled fibers are punched through the openings in the scrim and then into the microporous sheet and thus serve to hold the whole assemblage together. The scrim used in this Example is the same square-woven scrim described in Example 9. The presence of the scrim results in a laminate having a greater stability and a higher modulus at low elongations.

EXAMPLE 12

Examples 10 and 11 are repeated, except that the microporous sheet to which the batt is needled is 30 mils thick and the number of needle punches is about 600—800 per square inch and the distribution of the needle holes is such that a criss cross overall pattern (of fibrous material) is apparent on the "lower" face of the microporous sheet with areas which are essentially fiber-free (or of much lower fiber density) readily visible, between the criss-crossing lines.

In the needle-punching of the microporous material the "upward" strokes of the needles may be such that they move to positions considerably above (e.g. 1/4 inch or more above) the "upper" surface of the microporous material, so that there is a considerable length of fiber, on the upper face; these lengths tend to form curls of fibers (Figure 32) unless brushed out. Alternatively the upward strokes may terminate a much shorter distance above that upper surface or all (or some of) those upward strokes may even terminate within the microporous material so that the fibers (e.g. fiber loops) are retained within the material without being exposed at that upper surface.

The number of needles punches per square inch will generally be well over 100 and is preferably over 200, such as about 300, about 400, about 500 or even more.

The needle punching may be effected so that only a relatively small amount of fibre is present on the "upper" surface of the microporous material, e.g. about 0.2 to 1 (such as about 0.4 to 0.6) oz/yd^2.

The "upper" partly fibrous surface of the needle-punched microporous material (such as the materials of Examples 10—12) may be treated in various ways prior to being laminated to the microporous material.

It may be treated to melt back the protruding surface fibres, thus forming fused nubs at the fibre ends; the presence of these nubs makes it more difficult to pull these fibres out through the microporous material and thus strengthens the physical bond between the fibrous batt and the microporous material. Such fibre-melting treatments may be effected by flaming (or infra-red heating) without significantly affecting the microporous material. One may also subject the "upper" surface of the needle-punched microporous material to influences which tend to fuse or soften the microporous material, such as infra-red heating or flaming of that surface with or without preliminary treatment of that surface with an agent which lowers the fusion temperature (e.g. a solvent such a dimethyl formamide). The protruding fibres at the "upper" surface of the needle-punched microporous material may also be abraded (as by sanding, to break the protruding loops of fibre) or brushed (to pull out such loops) thereby providing a nap having numerous free fibre ends; this nap may, if desired, be sheared in conventional manner, to a uniform nap length or thickness with or without preliminary or subsequent bonding (as described earlier) of the fibres to the microporous surface.

Before or after (or during) the operation of needle-punching the batt to the microporous layer, the batt may be treated to increase its coherence as by applying a binding agent, e.g. up to about 40%, such as 5, 10, or 20% of

binding agent as an elastomeric latex (previously described) or solution.

The treated needle-punched microporous material may be used in various ways. For instance, it may be used as a lining for shoes.

In the operation of the system described herein, very goods results have been obtained by using fibrous layers comprising fibres of polyethylene terephthalate. It will be understood that other fibres such as nylon (e.g. nylon 66), polyolefin (e.g. polypropylene), rayon, or polyacrylonitrile (e.g. Orlon) be employed.

Also, while very good results have been obtained with macro-apertured webs of elastomeric polyurethane, it will be understood that other thermoplastic elastomers may be employed, such as the polymers of diolefins sold as Kraton (a butadiene-styrene copolymer) and Solprene. Preferred thermoplastic elastomers set to a bond which is resistant to steam treatment; such treatment may be used in processing lasted shoe uppers. Their melting-sticking temperatures are preferably above 100°C, more preferably above about 110°C. Reactive elastomers which become cross-linked on heating during the processing of the laminate may also be used.

The skin material preferably comprises elastomeric material, preferably a polyurethane or a polyacrylate, and is preferably substantially free of solvent. Preferably, also, the outer, visible, portion of the skin is resistant to discoloration on exposure to air, light, or heat. Other components may also be present in the skin and these need not be elastomeric (see, for instance the uppermost layer in Figure 20A and note the "top coating" materials employed in U.S. patent 4,073,984). Excellent results are obtained with thermoplastic skins, including those whose melting-sticking temperatures are about the same as, or even higher than that of the microporous material and those whose melting-sticking temperatures are well below that of the microporous material and well below the temperature of the hot embossing roll. For instance, polyurethane materials, such as described in Example 4 above, may have melting-sticking temperatures of about 130°C. When the process involves bringing the skin-contacting surface of the microporous material up to its melting-sticking temperature (as is the case in the preferred grain-embossing process), or higher, the skin material may be a cross-linked non-thermoplastic polymer (or a polymer having a higher fusion temperature) since adhesion to the microporous material may then be obtained by fusion of the latter; accordingly the skin may comprise a layer of cross-linked polyurethane or polyacrylate. As noted there may be a release agent in or on the skin; this may be a readily fusible material which may form a non-tacky liquid film (such as a wax) or a finely divided material such as a flatting agent (e.g. a silica gel or silicate flatting agent of conventional type) that reduces the tackiness and adhesion of the heat-softened material. Of course the hot rolls may be coated with a non-adhering type of polymer such as a tetrafluoroethylene polymer (e.g. Teflon).

WHAT WE CLAIM IS:—

1. A process for making artificial leather which comprises:

(a) providing a supply of a continuous web of fibrous material and a separate supply of a continuous sheet of microporous elastomeric polyurethane and a separate supply of a macro-apertured web of a fusible elastomeric polymer the said microporous elastomeric polyurethane having a higher melting point than the fusible polymer of the macro-apertured web such as to remain in a microporous condition at the fusion temperature of the said macro-apertured web;

(b) continuously pulling the said webs and sheet lengthwise under tension from the said supplies to an assembling zone;

(c) continuously pre-heating the said fibrous web during its passage to the said assembling zone;

(d) continuously bringing the said macro-apertured web into contact with the said pre-heated fibrous web and transferring heat from and through the said fibrous web to the said macro-apertued web to raise the said macro-apertured web to its fusion temperature;

(e) bringing the said microporous sheet into contact with the said macro-apertured web before the said macro-apertured web attained its fusion temperature and before the said macro-apertured web attains its network breakdown temperature whereby the said macro-apertured web adheres to the said microporous sheet without substantial network breakdown;

(f) passing the resulting assemblage of webs and sheet lengthwise through a nip between two rotating rolls, the said rolls exerting high pressure to compress the said microporous sheet and cause the said fusible elastomeric polymer to flow around fibres of the said fibrous web to encase and bond the said fibres while leaving unbonded breathable areas corresponding to the macro-apertures of the said web; and

(g) cooling the resulting assemblage to set the said fusible polymer in solid condition.

2. A process as claimed in Claim 1, in which the said fibrous web comprises needle-punched staple fibres.

3. A process as claimed in Claim 1 or Claim 2 in which the said macro-apertured web is a stretchable web having a thickness of about 3 to 5 mils, and weighs about 0.5 to 0.08 oz/yd^2.

4. A process as claimed in Claim 1, 2 or

3, in which the said tension on the said macro-apertured web is maintained sufficiently low that the said web stretches less than 10% in passing from its supply to the said nip.

5. A process as claimed in Claim 1, 2, 3 or 4, in which the said fibrous web comprises an elastomeric binder in amount of about 2 to 40%, based on the total weight of the said fibrous web.

6. A process as claimed in Claim 1, 2, 3, 4 or 5, in which the said two rolls comprise a metal roll having a hot surface and an elastomer surfaced backup roll.

7. A process as claimed in any one of Claims 1 to 6, in which prior to cooling the resulting assemblage, the said assemblage is passed continuously lengthwise onto a rotating roll having a hot surface for providing a finish on the said microporous sheet, and is continuously removed lengthwise from the said hot roll.

8. A process as claimed in Claim 7, in which the said assemblage is maintained in a relaxation step under substantial absence of tension and in lengthwise arcuate form with its hot-finished surface convex at an elevated temperature such as to cause lengthwise relaxation of the microporous material thereby causing the said fibrous web laminated thereto to undergo lengthwise contraction.

9. A process as claimed in Claim 7 or Claim 8, in which the said hot surface has a temperature which is within about 15°C of the melting-sticking temperature of the said microporous material.

10. A process as claimed in Claim 7, 8 or 9, in which the said assemblage travels in contact with the said hot surface of the said rotating roll for a residence time of more than 1/2 second while the said assemblage is in arcuate form with its fibrous surface convex, and the said assemblage then, directly after its removal from the said hot surface of the said rotating roll, travels continuously in an arcuate form as set forth in Claim 8.

11. A process as claimed in Claim 7, 8, 9 or 10, in which the said hot surface is an embossing surface having ridges penetrating into the said microporous material.

12. A process as claimed in any one of Claims 7 to 11, in which the said microporous material is directly in contact with the said hot surface.

15. A process as claimed in any one of Claims 8 to 12, in which the said microporous sheet is about 10 to 50 mils thick and the said fibrous web has a thickness of about 20 to 50 mils during the said relaxation step, the overall thickness of the laminate during the said relaxation step being about 35 to 80 mils.

14. A process as claimed in any one of Claims 7 to 13, in which the fibre to elastomer weight ratio in the said assemblage is about 0.8:1 to 1.2:1.

15. A process as claimed in any one of Claims 1 to 14, in which a grain pattern is imparted to the microporous polyurethane sheet by passing the said sheet material continuously to the nip between a roll having a hot grain-embossing surface having hot grain-embossing projections and another roll, compressing the said sheet in the said nip and thereby forcing the said projections into the said sheet, passing the said sheet material out of the said nip and maintaining the said sheet material on the said grain embossing surface to transfer heat from the said projections into the said sheet while the said sheet is substantially uncompressed, and then continuously removing the said sheet material from the said hot roll.

16. A process as claimed in any one of Claims 7 to 15, in which the said hot surface is afforded by the surface of the one of the two rotating rolls to which the microporous sheet is juxtaposed.

17. A process as claimed in any one of Claims 7 to 16, in which when the said assemblage is on the said hot roll there is a thin elastomeric skin between the said microporous material and the said hot surface of the said roll.

18. A process as claimed in Claim 17, in which the said thin elastomeric skin has a thickness of less than about 15 mils.

19. A process as claimed in any one of Claims 15 to 18, in which the residence time of the said sheet material in the said nip is less than about 0.1 second and its residence time on the said hot surface while substantially uncompressed is at least about 1/2 second.

20. A process as claimed in any one of Claims 15 to 19, in which the said microporous polyurethane has a melting-sticking temperature of at least about 130°C.

21. A process as claimed in any one of Claims 15 to 20, in which the said melting-sticking temperature is about 155—185°C.

22. A process as claimed in any one of Claims 15 to 22, in which the said residence time in the said hot nip is so short that the said microporous sheet recovers to substantially its original thickness in the said process.

23. A process as claimed in any one of Claims 1 to 22, in which a surface showing a depth of surface colour is imparted to the microporous sheet which comprises continuously supplying a transparent coloured skin having an elastomeric layer onto a hot roll, continuously supplying a web having a coloured microporous elastomeric surface layer into contact with the said coloured skin, and while the said skin is on the said roll, fusing the said elastomeric layer to the said microporous elastomeric sheet to form a

product in which the colour of the said microporous zone is visible through the said coloured skin.

24. A process as claimed in Claim 23, in which the said skin is supported on a carrier sheet in its passage to and on the said hot roll and the heat to effect the said fusion is supplied from the said roll through the said carrier sheet.

25. A process as claimed in Claim 24, and including the steps of making the said skin by gravure coating a plurality of different shades of material successively onto the said carrier sheet, the said different shades of material being differently distributed on the same overall area of the said carrier sheet to form a mottled pattern.

26. A process as claimed in any one of Claims 1 to 25, in which the fibrous web supplied before the process commences is a ligated web and has a specific gravity below about 0.15 and in which the continuous sheet of microporous elastomeric polyurethane supplied before the process commences has a specific gravity above 0.2, and in which the process is such as to compact the said web to raise its specific gravity to above about 0.2.

27. A process as claimed in Claim 26, in which the said fibrous web comprises heat-settable fibres, and at least one of the said rolls has a hot surface maintained at temperature at which heat-setting of the said heat-settable fibres occurs.

28. A process as claimed in Claim 26 or Claim 27, in which the said fibrous web is passed through a web-preheating zone under tension before passing through the said nip.

29. A process as claimed in Claim 27 or Claim 28, in which the said heat-settable fibres comprise polyethylene terephthalate staple fibres and the said hot surface is maintained at a temperature of at least about 170°C but below the fusing temperature of the said heat-settable fibres.

30. A process as claimed in Claim 26, 27, 28 or 29, in which the said ligated fibrous web comprises needle-punched staple fibres and comprises about 0.05 to 0.1 gram of staple fibres per cubic centimetre.

31. A process as claimed in any one of Claims 1 to 30, for making artificial leather which includes:

(a) placing a thin preformed skin on the outer surface of the said microporous polyurethane, the said skin having a surface, in contact with the said microporous outer surface, which is heat fusible to the said outer surface;

(b) passing the said assemblage continuously lengthwise onto a rotating embossing roll having a hot grain-embossing surface in contact with the said skin at a temperature above the temperature at which the said skin fuses to the said outer surface; and

(c) continuously removing the said assemblage lengthwise from the said embossing roll.

32. A process as claimed in Claim 31, in which the said grain-embossing surface is afforded by the surface of the one of the two rotating rolls to which the microporous sheet is juxtaposed.

33. A process as claimed in Claim 30, 31 or 32, in which the said skin is heat-adhered to the said outer surface of the said microporous polyurethane sheet prior to the said embossing step (b).

34. A process as claimed in any one of Claims 30 to 33, including the steps of providing a supply of a continuous supporting film carrying the said skin, continuously drawing off the said skin-carrying film from the said supply onto the surface of a rotating roll having a hot surface in contact with the said supporting film at a temperature above the said skin-outer surface fusion temperature and maintaining the said outer surface of the said microporous polyurethane in contact with the said skin on the said film-contacted roll so as to adhere the said skin to the said outer microporous surface, and thereafter stripping the said film from the said assemblage prior to the said embossing step (b).

35. A process as claimed in Claim 34, in which the said film is of polyethylene terephthalate.

36. A process as claimed in any one of Claims 30 to 35, in which the said fusible surface of the said skin is of elastomeric polyurethane having a lower melting point than the polyurethane of the said outer microporous surface.

37. A process as claimed in any one of Claims 30 to 36, in which the face of the said skin which is in contact with the said embossing surface carries a release agent.

38. A process as claimed in any one of Claims 30 to 37, in which in the said embossing step (b) the said assemblage passes through the nip between the said embossing roll and an elastomer surfaced roll biased toward the said embossing roll, the conditions being such that at the said nip the said microporous polyurethane is compressed and the said elastomer roll surface is deformed, the said microporous polyurethane then expands to substantially its original thickness on leaving the said nip and the said assemblage, with the said skin, then remains in contact with the said embossing roll for a period of at least about 1/2 second, the residence time in the said nip being less than about 0.1 second.

39. A process as claimed in Claim 38, in which the said hot grain-embossing surface is at a temperature within about 15°C of the melting-sticking temperature of the said microporous material.

40. A process as claimed in any one of

Claims 30 to 39, in which the weight ratio of fibrous material to elastomer in the said assemblage is about 0.8:1 to 1.2:1 and the thickness of the said assemblage is about 20 to 80 mils.

41. A process as claimed in any one of Claims 33 to 40, in which the said skin comprises a plurality of layers including a layer adjacent to the said film and carrying a release agent to reduce adhesion to the said embossing surface and another layer, further from the said film than the said first mentioned layer, of elastomeric polyurethane.

42. A process for making an artificial leather substantially as specifically described herein with reference to the examples.

43. An artificial leather whenever made by a process as claimed in any one of Claims 1 to 42.

44. A highly air-permeable grain-embossed artificial leather having a dull grained surface comprising a fibrous non-woven material and a microporous elastomeric layer laminated thereto by fused elastomeric material bonded by the process claimed in any one of Claims 1 to 6 to the said microporous layer in a discontinuous or open pattern and embedding adjacent surface portions of fibres of the said non-woven layer, the said microporous layer being produced by coagulation of a solution of elastomer followed by mechanical removal of coagulated surface material to expose the inner structure of the coagulated microporous material and thereby provide an open surface having exposed microscopic open cells, the said microporous material being embossed by contact with a hot grain-embossing surface at a temperature within 15°C of the melting-sticking temperature of the said microporous material, the said embossing being effected to an extent sufficient to impart a visible grain pattern but insufficient to close the said exposed open cells.

45. An artificial leather as claimed in Claim 44 showing a depth of surface colour which comprises a base sheet having a coloured microporous surface zone heat-laminated to a preformed coloured transparent substantially continuous skin, the colour of the said microporous zone being visible through the said skin.

46. An artificial leather as claimed in Claim 45, in which the said microporous zone is coloured brown or black.

47. An artificial leather as claimed in Claim 45 or Claim 46, in which the said skin is less than 20 mils thick.

48. An artificial leather as claimed in Claim 45, 46 or 47, in which the microporous zone is of pigmented elastomeric polyurethane and the said skin comprises a layer of pigmented elastomer fused to the said microporous zone.

49. An artificial leather as claimed in any one of Claims 45 to 48, in which the polyurethane of the said microporous zone is thermoplastic and has a fusing temperature above that of the polyurethane of the said skin.

50. An artificial leather as claimed in any one of Claims 45 to 49, in which the said skin comprises at least two layers including an outer layer which is harder than the said elastomer layer.

51. An artificial leather as claimed in any one of Claims 44 to 50, in which the fibrous non-woven material comprises a batt of non-woven fibrous material needle punched to a microporous elastomeric polyurethane sheet having a thickness of about 10 to 40 mils and a specific gravity of about 0.2 to 0.6 so that fibres of the said batt extend transversely from one face of the said sheet into the said microporous sheet.

52. An artificial leather as claimed in Claim 51, in which the said needle punched fibres extend through the said microporous sheet onto the opposite face thereof, the amount of fibres being above about 2 ounces per square yard on the said one face and less than about 1 ounce per square yard on the said opposite face.

53. An artificial leather substantially as specifically described herein with reference to the Examples and the accompanying drawings.

KILBURN & STRODE,
Chartered Patent Agents,
Agents for the Applicants.

Printed for Her Majesty's Stationery Office by Burgess & Son (Abingdon) Ltd.—1981. Published at The Patent Office, 25 Southampton Buildings, London, WC2A 1AY, from which copies may be obtained.

1603487 COMPLETE SPECIFICATION
14 SHEETS *This drawing is a reproduction of the Original on a reduced scale*
Sheet 1



FIG 1



FIG 2



FIG 3



FIG 4

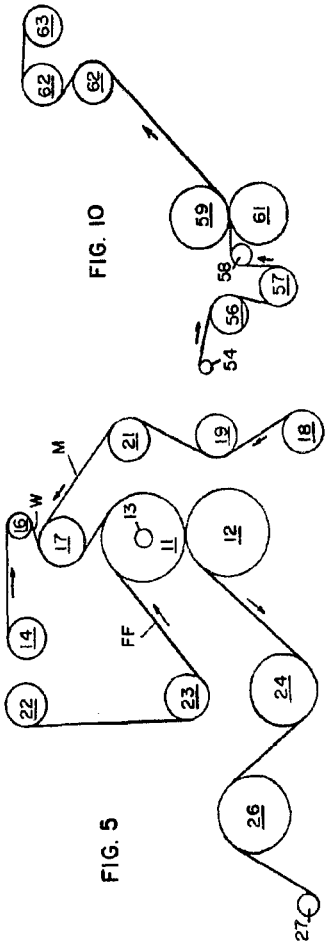


FIG. 10

FIG. 5

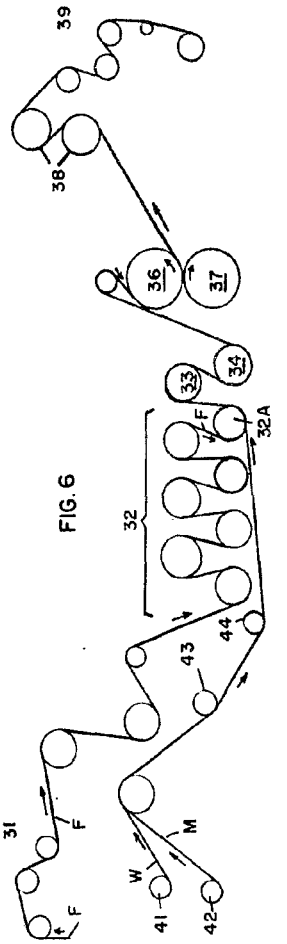


FIG. 6



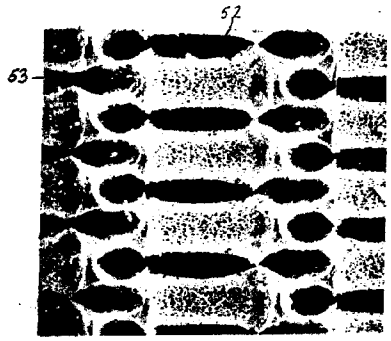
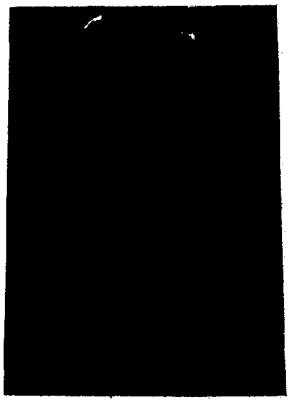


FIG 8

FIG 15



FIG 16



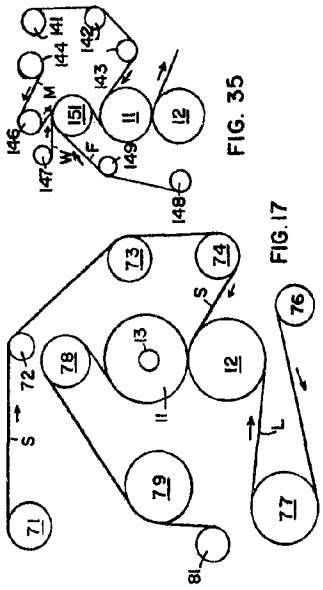


FIG. 35

FIG. 17

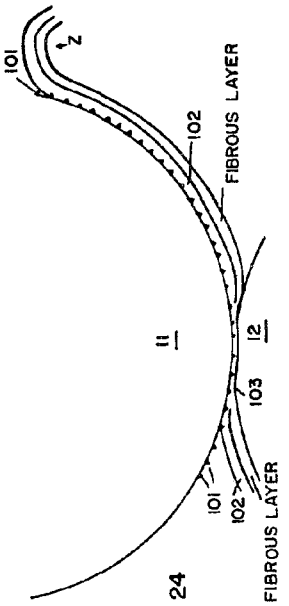


FIG. 24




FIG. 11





FIG. 11A


1603487 COMPLETE SPECIFICATION
14 SHEETS *This drawing is a reproduction of the Original on a reduced scale*
Sheet 5

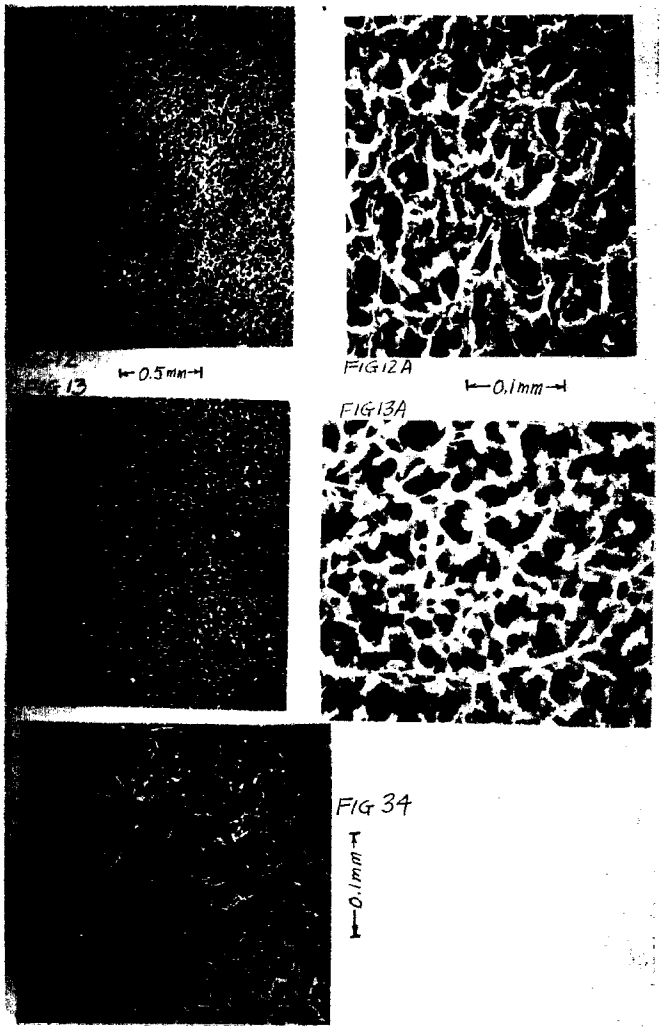

1603487 COMPLETE SPECIFICATION

14 SHEETS *This drawing is a reproduction of the Original on a reduced scale*

Sheet 6

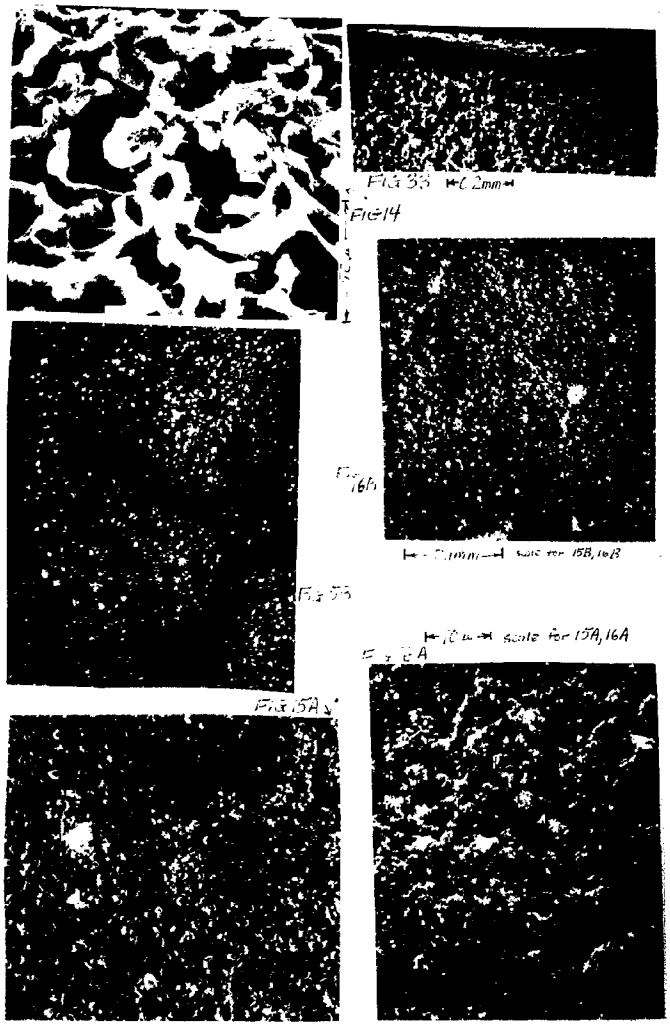





←50μ→ FIG 18



←10μ→ FIG 18A

←0.5mm→ FIG 18B

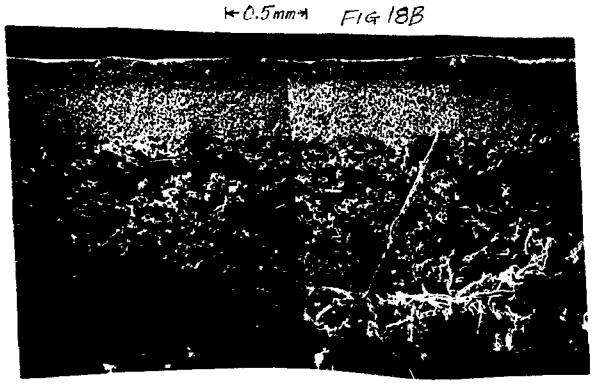

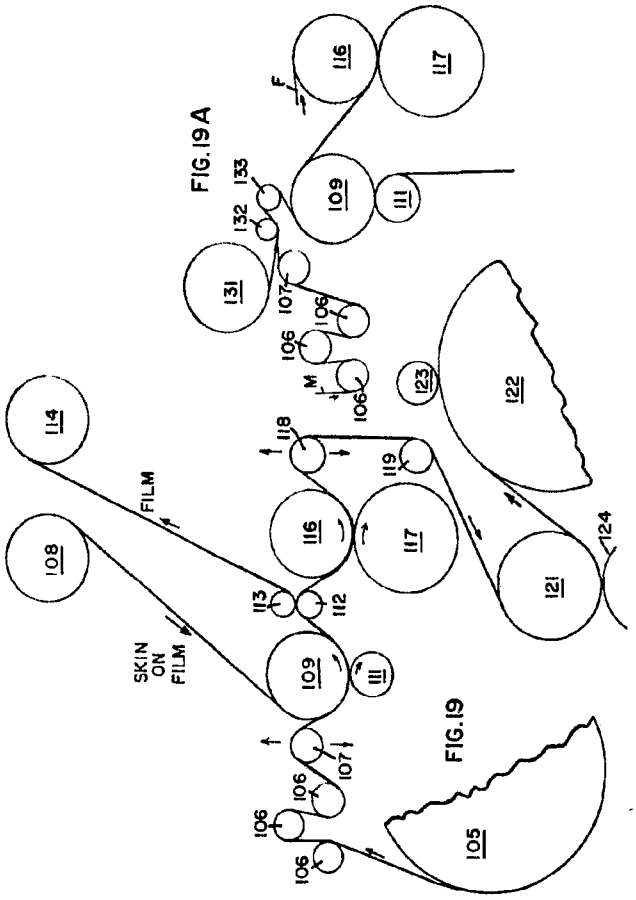
FIG.19A
FIG.19
FILM
SKIN ON FILM
F
M
105
106
107
108
109
111
112
113
114
116
117
118
119
121
122
123
124
131
132
133

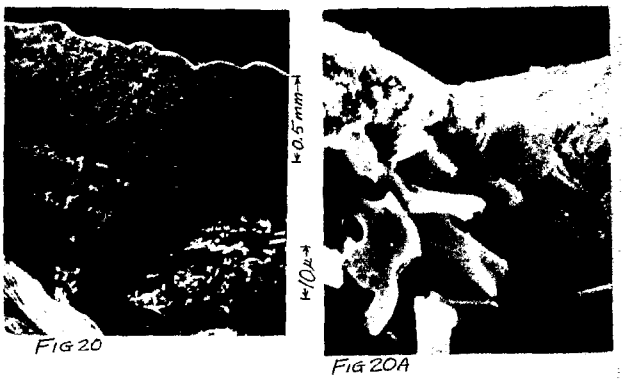


FIG 20 FIG 20A

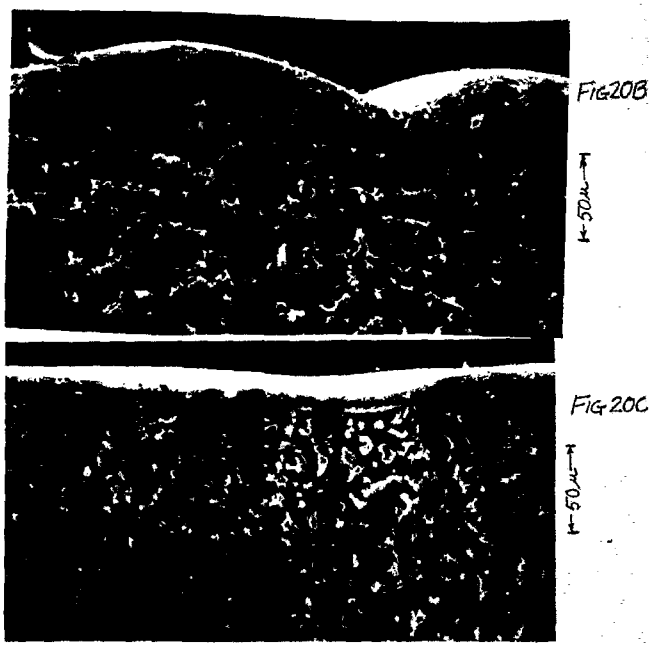
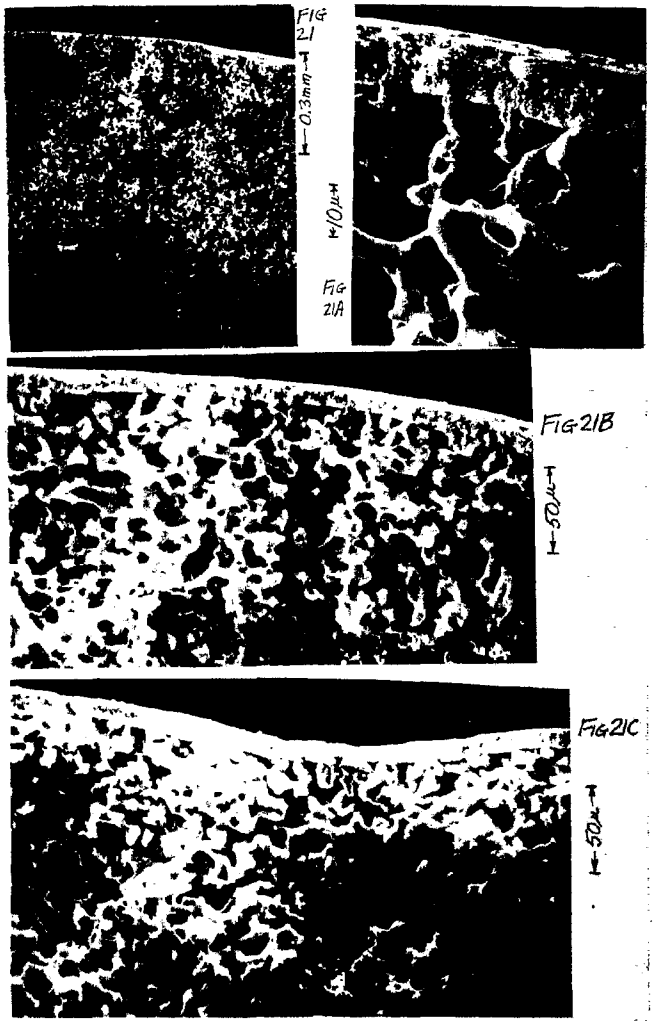


FIG 20B FIG 20C


FIG 2I
0.3mm
10μm
FIG 2IA
FIG2IB
50μm
FIG2IC
50μ

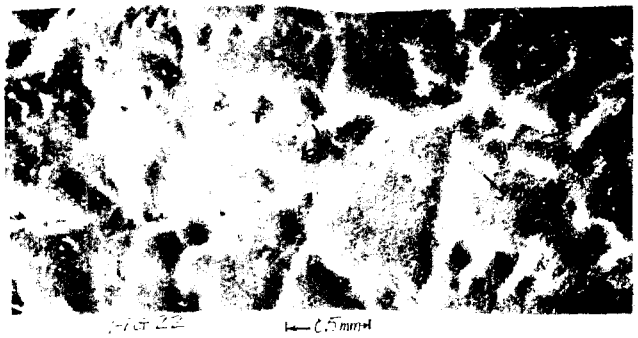


FIG 22

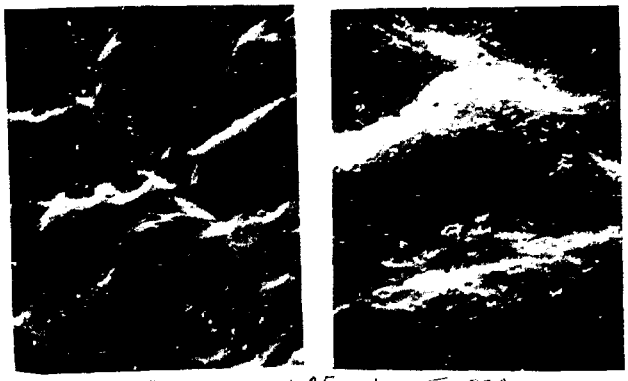
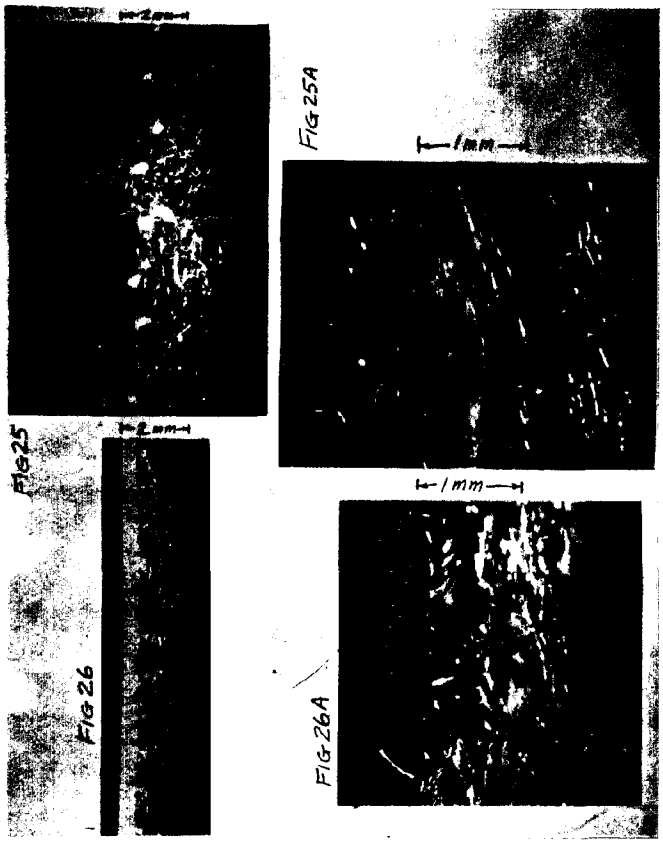
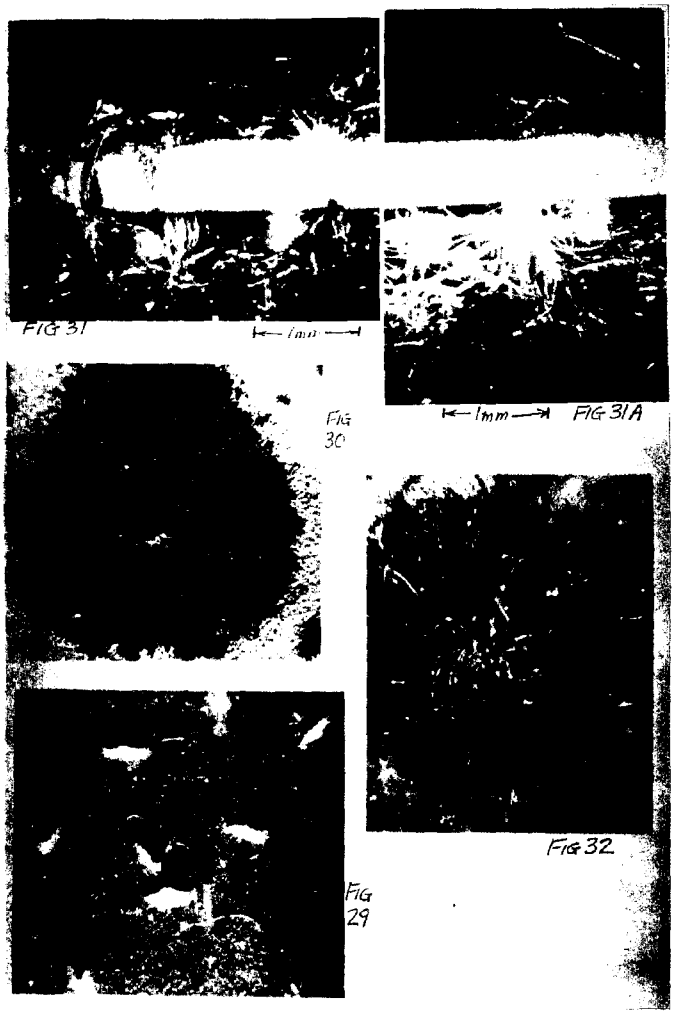


FIG 23 FIG 23A


FIG 25A
1mm
FIG 25
2mm
FIG 26
1mm
FIG 26A


FIG 31
1mm
1mm
FIG 31A
FIG 30
FIG 32
FIG 29

1603487 COMPLETE SPECIFICATION
14 SHEETS *This drawing is a reproduction of the Original on a reduced scale*
Sheet 14



FIG 27

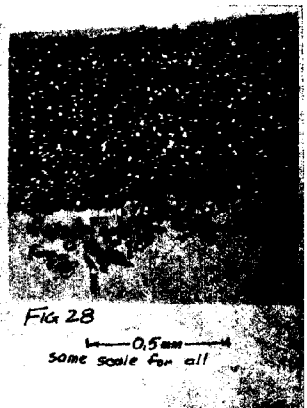


FIG 28

0,5 mm
same scale for all



FIG 27A



FIG 28A

(19) Japan Patent Office (JP)

(12) Public Patent Disclosure Bulletin (A)

(11) Public Patent Disclosure Bulletin No.: H6-113905

(43) Public Patent Disclosure Bulletin Date: April 26, 1994

(51) Int. Cl.[5]	Identification code	JPO file number	F1	Basis for classification
A43B 23/02	101 Z	7421-4F		
	13/00	8016-4F		

Request for Examination: Not made Number of Inventions: 3 (Total Pages: 4)

(21) Patent Application No.: H4-72312

(22) Patent Application Date: February 21, 1992

(71) Applicant: 000149620
Daiyu Corporation
7-3, Asakusa 7-chome, Daito Ku, Tokyo

(72) Inventor: Osamu Daimaru
c/o Daiyu Corporation
7-3, Asakusa 7-chome, Daito Ku, Tokyo

72) Inventor: Ryuzo Daimaru
c/o Daiyu Corporation
7-3, Asakusa 7-chome, Daito Ku, Tokyo

72) Inventor: Naoto Fujita
c/o Daiyu Corporation
7-3, Asakusa 7-chome, Daito Ku, Tokyo

(74) Agent: Osamu Sugawara, Patent Attorney


(54) Title of Invention: Uppers material for shoes

(57) Abstract

Petitioner adidas AG - Exhibit 1006 - Page 1

Skechers EX1013-p. 282
Skechers v Nike

[Objective] To develop uppers material for shoes indispensable to manufacturing methods that increase the economic efficiency of production by reducing the quantity of uppers materials for shoes as much as possible thus simplifying the stitching process.
[Configuration] The configuration is one sheet of cloth wherein, as uppers material for shoes, all the outlines of the main uppers for the shoe of one foot are continuous and the interiors thereof are woven using Jacquard weave in a variety of weave structures and/or patterns for each location. It is configured with yarn count of 250 per inch or greater and each pattern element is $25cm^2$ to $80cm^2$.

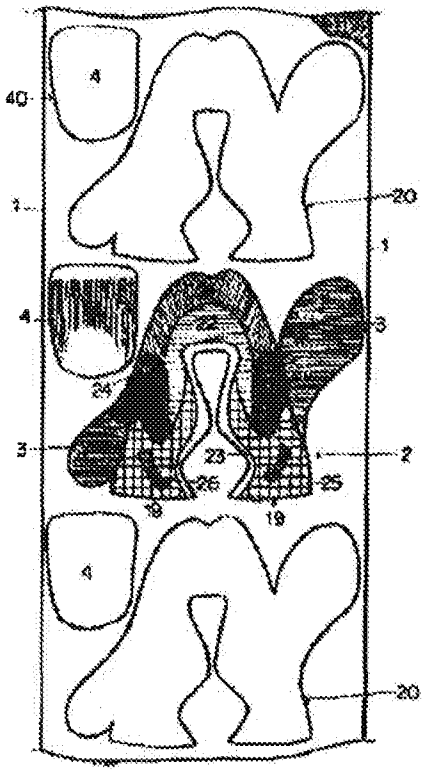

[start of original P2]

What is claimed is:

1. Uppers material for shoes configured of one sheet of cloth wherein all the outlines of the main uppers materials for the shoe of one foot are continuous and the interiors therein are woven in a variety of weave structures and/or patterns.

2. The uppers material for shoes according to claim 1 wherein said weave structure is Jacquard weave.

3. The uppers material for shoes according to claim 1 or claim 2 wherein the yarn count of said weave structure is 250 per inch and one pattern is $25cm^2$ to $80cm^2$.

BACKGROUND OF THE INVENTION

[0001]

Petitioner adidas AG - Exhibit 1006 - Page 2

Skechers EX1013-p. 283
Skechers v Nike

[Field of the Invention] The present invention relates to uppers material for shoes and more particularly that for sport shoes. In particular, the shoe uppers material of the present invention is uppers material comprising one sheet of woven fabric.

[0002]

[Description of the Related Art] The uppers material used in sport shoes and the like is configured of several types of parts. For example, when using woven fabric and/or knitted fabric as uppers materials for shoes, as shown in Figure 2, the material is made into many parts, such as the tip part A, upper surface part B, edge part C, side surface parts D, E, and F, ankle edge part G, heel parts H and I, and the material and shape of each is selected according to the function of that location. Parts of many types are provided, such as woven fabrics and/or knitted fabrics of various surface structure and design (A, B, I), natural leather or manmade leather (C, E, G), and plastic (D, F, H). A sheet of shoe uppers material is formed by attaching each part with adhesive or by sewing/stitching, with the parts stitched together 3-dimensionally in specified locations.

[0003] A configuration that assembles uppers material as parts, enabling parts to be designated on a surface according to the mobility or protection required at each site on the foot, meets the demand for emphasis on functionality and the requirement for ever smaller material parts.

[0004]

[Problem the Invention Seeks to Solve] As mentioned above, with the conventional shoe manufacturing methods based on parts, a variety of materials come to be assembled into the shoe for one foot. To do this, there is the difficulty of procuring each material and losses of each material are large, with the loss having to be borne by the shoe factory. In addition, because the structure is complicated, effort is required for cutting and stitching together and skill-training is required. The actual labor cost, domestically, for cutting and sewing/stitching work has increased by 10 to 100% or more. The trend toward a "parts approach" results in an increase in the component of specialized fabrication work and a steep rise in personnel cost, coupled with the fact that domestic sewing/stitching factories are unprofitable. Thus shoe manufacturing that involves a large number of individual parts has become difficult in practice. Further, in respect to economies of manufacturing, because a process where each part of a shoe is designed and cut and a process where these parts of complicated shapes are stitched together accurately and with uniform elasticity are involved, for mass production, there were the issues that high-level

Petitioner adidas AG - Exhibit 1006 - Page 3

Skechers EX1013-p. 284
Skechers v Nike

techniques were required and simplification/reduction of the number of process steps was difficult.

[0005]

[Means of solving the problem] The present invention solves these problems. It develops material for shoes indispensable to manufacturing methods that increase economic efficiency of production by reducing the quantity of shoe uppers materials as much as possible, thus enabling smooth provision of materials and reducing labor cost through simplification of the sewing/stitching process. The present invention, by setting up the conventional parts as a single sheet of main uppers materials as much as possible, reduces the number of parts and the number of sewing/stitching operations, thus improving overall efficiency. To sum up, uppers material is provided which, on a single sheet of Jacquard weave cloth, forms an integration of almost all the uppers material for a shoe. The present invention is uppers material configured of one sheet of cloth wherein all the outlines of the main uppers materials for the shoe of one foot are continuous and the interiors therein are woven in a variety of weave structures, designs and/or patterns. The weave structure is Jacquard weave, the yarn count of the weave structure is 250 per inch or greater, and one pattern element is $25cm^2$ to $80cm^2$. This configuration can handle the strengthening of shoes and the demands of design quite adequately.

[0006] Furthermore, the present invention forms the uppers material on one sheet of Jacquard weave cloth, and on top of them other elements can be sewn on, water-proofing material can be applied, decorative elements can be sewn on, and of course water-proofing can be done as a secondary production step.

[0007]

[Embodiments] Figure 1 shows an embodiment of uppers material for shoes according to the present invention. The uppers material for shoes is configured of one sheet of cloth wherein, the main uppers material 2 for the shoe of one foot are woven on elongated foundation cloth 1, all the outlines thereof are connected, and within those outlines at each appropriate location 21 through 26 are many kinds of weave structures, designs and patterns. The weave structure is a comparatively heavy Jacquard weave, the weave structure being changed for each part corresponding to each location on the shoe or being woven in a pattern that changes the design/pattern. On foundation cloth 1, all of the main uppers material 2 for the shoe of one foot are woven, and continuous thereto middle sheet 3 and, and separated a little therefrom, shoe

Petitioner adidas AG - Exhibit 1006 - Page 4

Skechers EX1013-p. 285
Skechers v Nike

tongue flap shaped cover 4, are woven in. Middle sheet 3 is a sole-shape divided in half, roughly diagonally, formed continuous with the edge of the outline of main uppers material 2, to the right and left thereof. Middle sheet 3, formed divided, will become the shape of the sole by being 3-dimensionally folded in and stitched together when main uppers material 2 is formed 3-dimensionally on the shoe mold. Also, the shoe tongue flap shaped cover 4 is sown in on the inside of main uppers material 2. In this embodiment, main uppers material 2, middle sheet 3, and tongue flap shaped cover 4 are positioned appropriately on elongated foundation cloth 1, forming an elongated weaving with a continuous pattern. Main uppers material 2, middle sheet 3, and tongue flap shaped cover 4 are cut along the outline line of each 20 and 40, to form two parts. The above-mentioned main uppers material 2 is configured of a weave structure with a yarn count of 250 per inch or more, one pattern element being from 25cm^2 to 80cm^2 in size. Because this yarn count meets the strength demanded of sports shoes, it is in the preferred range, and making one pattern element about 25cm^2 to 80cm^2 in size is desirable, not only in terms of design, but also to maintain flexibility and strength.

[start of original P3]

[0008] For weaving yarn, material is selected that is outstanding in terms of wear resistance, weather resistance, elasticity, and flexibility. By "punch-out" cutting of main uppers 2, middle sheet 3, and tongue flap shaped cover 4, parts are made in the least number possible.

[0009] Figure 3 shows the main uppers 2 after cutting. Overall they make one sheet of woven fabric and each pattern element 10 through 18 therein is formed of a different weave structure and/or different pattern. For each shoe location, the appropriate weave structure is used. For example, toe cap tip 10 is formed of a weave structure of high yarn count and density, and upper surface 11 is formed of a weave structure with high breathability. Furthermore, by using a weaving yarn materials such as those with nylon fiber blended in and cutting the outline lines by thermal cutting, the cut edges melt and will not fray.

[0010] The main uppers 2, configured in this way, become 3-dimensional shoe uppers by stitching together the parts for joining by stitching 19 at the rear-most part of those main uppers.

[0011] When the elongated foundation cloth 1 of Figure 2 is fully woven, the shoe uppers parts can be procured as just main uppers 2, middle sheet 3, and tongue flap shaped cover 4, and he

Petitioner adidas AG - Exhibit 1006 - Page 5

Skechers EX1013-p. 286
Skechers v Nike

work of stitching together the parts can be greatly simplified. The thickness of the main uppers 2 can be as appropriate, but in this embodiment, the rough average is 2mm.

[0012] In this connection, the shape of main uppers 2 enables various types of computer-generated designs and patterns to be used, and by designating patterns or other software to weaving machines, this can be applied both to small lot production and to mass production.

[0013]

[Effects of the Invention] The uppers material for shoes according to the present invention, which is the above configuration, is advantageous in terms of material procurement, enables simplification of manufacturing processes, and will lead to a main transformation of shoe manufacturing methods. In addition it has the following unique technical effects.

[0014] (1) It is desirable to make shoes that are matched to the individuality of each shoe wearer's foot, but with the movement toward mass production and standardization of each part, it becomes difficult to make shoes matched to that individuality. However, with Jacquard weave cloth, if pattern, size, characteristics of the upper part of the foot, and the like are inputted to a computer connected to a weaving machine, from the stage of material [selection] shoes can be made that are matched to the wearer.

(2) Because the shoes are made with the main uppers as one sheet, the conventional work of stitching together numerous parts can be abbreviated and the production process can be greatly shortened. As a result, large numbers of skilled technicians are no longer needed and streamlining can be done. Moreover, production times can be shortened and production cost can be reduced.

(3) Because the shoes are made with one sheet of main uppers, they can be lightened.

(4) Because the setting for yarn count, the size setting of each pattern element, and the arrangement and shape of each pattern element enable any desired pattern to be made, designs can deal precisely with the strength and flexibility demanded at each location.

(5) Because the number of stitching sites is greatly reduced, water resistance will be very improved compared to conventional products. Also, because the load applied to the shoe surface can be distributed, shoes will be subject to less breakage.

[0015] In this way the uppers material for shoes according to the present invention will greatly change the manufacturing method for fabric-made sports shoes. This is a very useful and outstanding invention that not only enables the easy forming of popular designs, patterns and the

Petitioner adidas AG - Exhibit 1006 - Page 6

Skechers EX1013-p. 287
Skechers v Nike

like, but also achieves outstanding economic efficiency in manufacturing through easy stylization of materials, simplification of manufacturing processes, shortening of production time, etc., and contributes to the reduction of manufacturing cost.

[Brief Description of the Drawings]

Figure 1 is a plane view of one embodiment of the uppers material for shoes according to the present invention and shows an elongated foundation cloth in the state where the uppers are woven thereon;

Figure 2 is a plane view of conventional parts-type uppers material for shoes prior to being stitched together; and

Figure 3 is a plane view of another embodiment of uppers material for shoes according to the present invention in the state where the main uppers have been cut out.

[Explanation of Key Numbers]

1	Elongated foundation cloth
2	Main uppers
3	Middle sheet
4	Tongue flap shaped cover
10 through 18	Pattern elements
19	Parts for joining by stitching
21 through 26	Locations inside outlines of main uppers
20 and 40	Outline lines

Petitioner adidas AG - Exhibit 1006 - Page 7

Skechers EX1013-p. 288
Skechers v Nike

[start of original P4]

Fig. 1

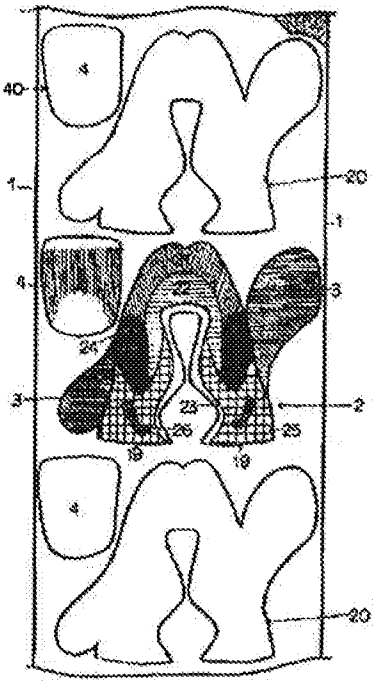


Fig. 2





Fig. 3



GlobalPath TRANSLATIONS

Translation Certification by GlobalPath Translations, Inc., November 8, 2012

The English translation for the accompanying document was completed by a native-speaking, accredited, professional translator, in accordance with the codes, ethics and practices of the American Translators Association. The English version provided is an accurate translation of the original Japanese text.

Certified Translation: 8-Page Accompanying Japanese Translation into English

- **Certified Translation File Name:** Certified Translation J.H6-113905.docx
- **Original Document Translated:** Public Patent Disclosure Bulletin No.:H6-113905

November 8, 2012

Gerry H. Carson, CEO
GlobalPath Translations, Inc.
3080 Verdun Drive NW
Atlanta, GA 30305

Date

NORBERT VON LOTTEN NOTARY PUBLIC FULTON COUNTY, GEORGIA

Petitioner adidas AG - Exhibit 1006 - Page 8

Skechers EX1013-p. 289
Skechers v Nike

(19)日本国特許庁（ＪＰ）　(12)公開特許公報（Ａ）　(11)特許出願公開番号

特開平6－113905

(43)公開日　平成６年(1994)４月26日

(51)Int.Cl.[5]		識別記号	庁内整理番号	ＦＩ	技術表示箇所
Ａ４３Ｂ	23/02	１０１　Ｚ	7421－4Ｆ		
	13/00		8016－4Ｆ		

審査請求　未請求　請求項の数３(全　４　頁)


(21)出願番号　特願平4－72312

(22)出願日　平成４年(1992)２月21日

(71)出願人　000149620
株式会社大裕商事
東京都台東区浅草７丁目７番３号
(72)発明者　大丸　修
東京都台東区浅草７丁目７番３号　株式会社大裕商事内
(72)発明者　大丸　良三
東京都台東区浅草７丁目７番３号　株式会社大裕商事内
(72)発明者　藤田　直人
東京都台東区浅草７丁目７番３号　株式会社大裕商事内
(74)代理人　弁理士　菅原　修

(54)【発明の名称】　シューズ用甲被材

(57)【要約】
【目的】　シューズの甲被のパーツを極力少なくして縫製工程を簡略化し、作業経済性を高める製法に不可欠なシューズ用甲被素材を開発する。
【構成】　シューズ用甲被材として、シューズの片足分の主たる甲被を、全輪郭が連続しかつその内部を各部位ごとに多種類の織り組織及び又は模様によって、ジャガード織で織り立てた一枚の布で構成した。織り組織の糸本数が、２５０本／インチ以上、かつ一の柄を２５(m^2)～８０(m^2)で構成する。

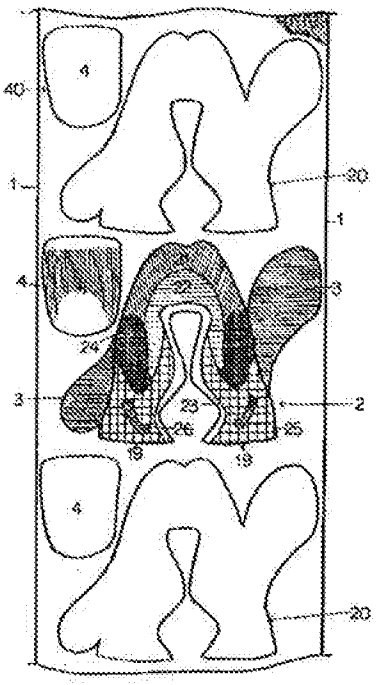

Petitioner adidas AG - Exhibit 1006 - Page 9

Skechers EX1013-p. 290
Skechers v Nike

1

【特許請求の範囲】

【請求項１】　シューズの片足分の主たる胛被を、全輪郭が連続しかつその内部を多種類の織り組織及び又は模様によって織り立てた一枚の布で構成したことを特徴とするシューズ用胛被材。

【請求項２】　前記織り組織がジャガード織である特許請求の範囲第１項記載のシューズ用胛被材。

【請求項３】　前記織り組織の糸本数が、２５０本／インチ以上からなり、かつ一の柄を２５〔m²〕～８０〔m²〕で構成した特許請求の範囲第１項および第２項記載のシューズ用胛被材。

【発明の詳細な説明】

【０００１】

【産業上の利用分野】本発明は、シューズ、特にスポーツ用シューズの胛被材に関する。特に、本発明のシューズの胛被材は一枚の織物からなる胛被材である。

【０００２】

【従来の技術】スポーツシューズなどに使用されている胛被材は、数種類のパーツから構成されている。例えば、従来、織物、編物をシューズ用胛被材として利用する場合は、図２に示すように、先端部分パーツＡ、上面パーツＢ、縁パーツＣ、側面パーツＤ・Ｅ・Ｆ、足首縁パーツＧ、踵部分パーツＨ・Ｉなど、部位の機能に応じた素材や形状が選定され、多数にパーツ化されている。表面の組織、意匠の違う織物や編物（Ａ・Ｂ・Ｉ）、天然皮革や人工皮革（Ｃ・Ｅ・Ｇ）、プラスチック（Ｄ・Ｆ・Ｈ）等を多数のパーツ部品を準備し、パーツ部品はそれぞれ接着及び縫製し、一枚の胛被材となり、所定の個所で立体的に縫合されてシューズの胛被を形成する。

【０００３】パーツ部品で胛被材を組合せる構成は、ある面では足の各部位ごとに要請される運動性や保護部材などに応じたパーツを選定でき、機能重視の要請や材料の小片化の要請に叶うものであった。

【０００４】

【発明が解決しようとする課題】前記のように従来のパーツ部品によるシューズ製法は、様々な素材が１足のシューズに組み合わされてきている。これには、各素材の調達の複雑さがあるとともに、各材料のロスが大きいし、しかもこのロスはシューズ工場の負担となっており、また複雑な構造のため、それにともなう裁断、縫合に手間がかかり、技能教育の必要性もある。事実国内の裁断・縫製工賃は、１０～１００％以上も上がってきている。このようにパーツ化の方向は、専門的加工作業の部分を増大させ、人件費の高騰とともあいまって、国内での縫合加工は採算が合わず、多数個のパーツ部品からなるシューズ生産は、事実上困難になってきている。また製造経済性の面でも、シューズの各部位を設計切断してパーツ化する工程と、その複雑な形状のパーツを正確にかつ均等な張力で縫合する工程があるため、量産する場合にも高度な技術が必要であり、工程数の簡略化に課題があった。

2

【０００５】

【課題を解決するための手段】本発明は、これらの課題を解決するもので、スムーズな材料手配を可能にし、縫製工程を簡略化して工賃を下げるべく、シューズの胛被のパーツを極力少なくして作業経済性を高める製法に不可欠な素材を開発するものであり、従来のパーツ部品を極力主たる胛被として一枚仕立とし、パーツ部品及び、縫製部の数を減らし、すべての効率を上げるものである。要約するとジャガード織り生地一枚で、シューズの胛被のほぼ全部を一括形成した胛被材を提供する。ここに本発明は、シューズの片足分の主たる胛被を、全輪郭が連続しかつその内部を多種類の織り組織及び又は意匠・模様によって織り立てた一枚の布で構成したことを特徴とするシューズ用胛被材である。織り組織はジャガード織で、織り組織の糸本数が、２５０本／インチ以上からなり、かつ一の柄を２５〔m²〕～８０〔m²〕で構成している。この構成は、シューズの強度およびデザインの要請にも極めて適切に対応できる。

【０００６】なお、本発明は、その一枚のジャガード織り布で胛被を形成するが、他の部材をその上から縫い合わせたり、防水部材を張り合せたり、装飾部材を縫合したり、防水処理を二次加工することなども当然にできる。

【０００７】

【実施例】図１は、本発明に係るシューズ用胛被材を示す実施例である。シューズ用胛被材は、長尺基布１に、シューズの片足分の主たる胛被２を、全輪郭が連続しかつその輪郭内部を適宜部位２１～２６ごとに多種類の織り組織及び意匠・模様によって織り立てた一枚の布で構成している。織り組織は、比較的厚手のジャガード織で、シューズの各部位に相応する部分ごとに織り組織を変えて、あるいは意匠模様を変えた柄に織っている。長尺基布１には、シューズの片足分の主たる胛被２の全部を織り、これに連続して中敷布３、および少し離してシューズの舌片状カバー４を織り込んでいる。中敷布３は、足底型を略斜め半分に分割して主たる胛被２の輪郭縁に連続して左右に形成している。分割形成された中敷布３は、主たる胛被２が足型に立体化されたときの３次元的折り込みと縫合で足底の形となる。また舌片状カバー４は、主たる胛被２の内部に縫合される。この実施例では、長尺基布１に、主たる胛被２と中敷布３、舌片状カバー４を適宜位置に配して、連続模様長尺織物として形成している。主たる胛被２と中敷布３と舌片状カバー４とはそれぞれその輪郭線２０・４０で裁断され、２つのパーツ部品を形成する。前記主たる胛被２は、織り組織の糸本数が、２５０本／インチ以上からなり、かつ一の柄を２５〔m²〕～８０〔m²〕で構成している。この糸本数は、スポーツシューズとしての強度の要請にかなうために好適な範囲であり、一つの柄は２５〔m²〕～８０

Petitioner adidas AG - Exhibit 1006 - Page 10

Skechers EX1013-p. 291
Skechers v Nike

$/m^2$ 位にするのがデザイン上ばかりでなく柔軟性や強度を維持するのに好ましい。

【０００８】織り糸は、ひっかき耐摩耗性、耐候性、弾性、柔軟性に優れた素材が選定され、主たる胛被２と中敷布３、舌片状カバー４を打ち抜き裁断して、極力少ないパーツを作成する。

【０００９】図３は、裁断した主たる胛被２を示すもので、全体が一枚の織物であって、その中のそれぞれの柄１０～１８は、異なる織り組織・異なる模様で形成されている。例えば、つま先先端部１０は、糸本数を多く密度の高い織り組織で形成し、上面１１は通気性の高い織り組織で形成して、シューズの各部位に適応した織り組織を用いる。なお織り糸にナイロン繊維を混紡しておいた素材等によって、輪郭線を加熱裁断をすれば裁断縁が溶融してほつれない。

【００１０】このように構成された主たる胛被２は、その最後方部の縫製結合部１９をあわせて縫合され、立体的なシューズの胛被になる。

【００１１】図２の長尺基布１を織りあげると、主たる胛被２と中敷布３、舌片状カバー４のパーツ部品だけでシューズの胛被部品が調達できることになり、そしてパーツの縫合作業は、極めて簡略化されることになる。主たる胛被２は、厚さは適宜でよいが、実施例では略平均２㎜である。

【００１２】図に、主たる胛被２の形状は、コンピュータにより種々の設計・デザインが可能であり、織機にパターンやソフトを指示することにより、少数個の生産にも量産化にも適応できる。

【００１３】

【発明の効果】以上の構成である本発明に係るシューズ用胛被材は、材料調達上有利であり、製造上もその工程が簡略化でき、シューズの製法を大きく変革することになる。そして次のような特有な技術的効果がある。

【００１４】①シューズは、履く人の足の個性にあわせて作成されるのが好ましいが、パーツ部品で規格化して量産してゆくと、その個性に適合したシューズができにくいが、ジャガード織り生地の場合は、織機に接続するコンピュータにパターンや大きさ・足甲の形状の特性などを入力すれば、材料の時点から履く人に適合したシューズを作成できる。

②一枚の主たる胛被で、作成するので、従来のような多数のパーツの縫合という作業が省略でき、作業工程が大幅に短縮できる。そのため熟練技術者を多く要しない簡素化ができ、かつ作業時間の短縮化ができ、製造コストを引き下げることが可能である。

③一枚の主たる胛被で作成されているため、軽量化ができる。

④糸本数の設定と、一つの柄の大きさの設定、一つの柄の配置や形状が自由にパターン化できるので、各部位ごとに要請される強度や柔軟性に、しっかりと対応できる。

⑤縫合箇所が極端に少なくなるので、防水性は従来品に比してたいへんよくなり、またシューズ表面にかかる負荷も分散できるので破損も少ないものとなっている

【００１５】このように、本発明に係るシューズ用胛被材は、布製のスポーツシューズの製法を大きく変えるもので、流行のデザインや柄などを容易に形成できるばかりでなく、材料の定型化、製造工程の簡略化、製造時間の短縮化など、製造上の優れた経済性を達成するものであり、製造コストの低廉化に寄与することができるきわめて有用な優れた発明である。

【図面の簡単な説明】

【図１】本発明に係るシューズ用胛被材の一実施例を示すもので長尺基布に織り込んだ状態を示す平面図。

【図２】従来のパーツ化したシューズ用胛被材の縫合前の平面図。

【図３】本発明に係るシューズ用胛被材の他の実施例で、主たる胛被を打ち抜いた状態平面図。


【符号の説明】

１	長尺基布
２	主たる胛被
３	中敷布
４	舌片状カバー
１０～１８	柄
１９	縫製結合部
２１～２６	主たる胛被の輪郭内部の部位
２０・４０	輪郭線


Petitioner adidas AG - Exhibit 1006 - Page 11

Skechers EX1013-p. 292
Skechers v Nike


【図1】

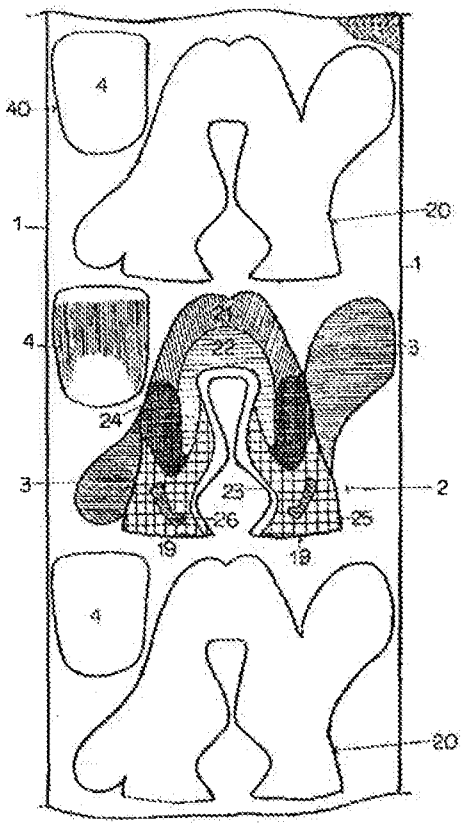

【図2】



【図3】



Petitioner adidas AG - Exhibit 1006 - Page 12

Skechers EX1013-p. 293
Skechers v Nike

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :		(11) International Publication Number:	WO 90/03744
A43D 8/24	A1	(43) International Publication Date:	19 April 1990 (19.04.90)

(21) International Application Number: PCT/US89/04370

(22) International Filing Date: 3 October 1989 (03.10.89)

(30) Priority data:

251,305	3 October 1988 (03.10.88)	US
279,308	28 November 1988 (28.11.88)	US
347,813	4 May 1989 (04.05.89)	US

(60) Parent Applications or Grants
(63) Related by Continuation

US	251,305 (CIP)
Filed on	3 October 1988 (03.10.88)
US	279,308 (CIP)
Filed on	28 November 1988 (28.11.88)
US	347, 813 (CIP)
Filed on	4 May 1989 (04.05.89)

(71) Applicant *(for all designated States except US)*: RBFPT, INC. [US/US]; 207 Lochside Drive, Cary, NC 27511 (US).


(72) Inventor; and
(75) Inventor/Applicant *(for US only)* : CURLEY, John, Joseph, Jr. [US/US]; 51 Pleasant Street, Dunstable, MA 01827 (US).

(74) Agents: SMITH, James, M. et al.; Hamilton, Brook, Smith & Reynolds, Two Militia Drive, Lexington, MA 02173 (US).

(81) Designated States: AT (European patent), AU, BE (European patent), BR, CH (European patent), DE (European patent), DK, FR (European patent), GB (European patent), HU, IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent), US.

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: HEAT EMBOSSED SHOES

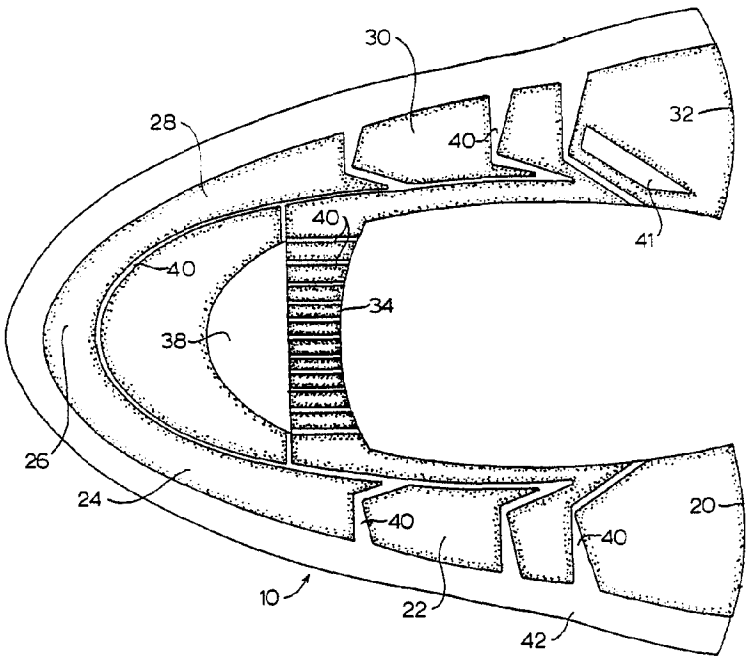

(57) Abstract

A labor-saving shoe making process provides multilayered, heat embossed, shoe components including a one-piece upper. The components comprise a resilient foam layer and other layers for flexibility, strength and durability. Embossing of the shoe components serves to reduce the thickness of the material, provide sealing of the material, provide form and shape to the shoe, and allow strain control management. The connecting of shoe components is accomplished in part through the use of thermoplastic rivets which are heated and melted by the application of a high frequency field.

Petitioner adidas AG - Exhibit 1010, Page 1
Skechers EX1013-p.294
Skechers v Nike

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MR	Mauritania
BE	Belgium	GA	Gabon	MW	Malawi
BF	Burkina Faso	GB	United Kingdom	NL	Netherlands
BG	Bulgaria	HU	Hungary	NO	Norway
BJ	Benin	IT	Italy	RO	Romania
BR	Brazil	JP	Japan	SD	Sudan
CA	Canada	KP	Democratic People's Republic of Korea	SE	Sweden
CF	Central African Republic			SN	Senegal
CG	Congo	KR	Republic of Korea	SU	Soviet Union
CH	Switzerland	LI	Liechtenstein	TD	Chad
CM	Cameroon	LK	Sri Lanka	TG	Togo
DE	Germany, Federal Republic of	LU	Luxembourg	US	United States of America
DK	Denmark	MC	Monaco		

HEAT EMBOSSED SHOES

Background of the Invention

The process of shoe manufacturing is generally very labor intensive and the most expensive component of the manufacturing process today is labor. For a particular shoe style, after the pattern is made for all sizes and the production schedule of manufacturing steps is determined, the labor-intensive assembly process occurs. The assembly process for a shoe having its specific design and number of pieces begins with the process of cutting the upper material. With a more complicated shoe pattern or with more pieces in the shoe design, more elaborate cutting procedures must be designed to minimize waste of materials.

In a typical shoe manufacturing process, after the upper pieces are cut, they are prepared for stitching in the fitting process. The upper pieces are first marked for stitching. The edges of the pieces that are to be joined to other pieces must be reduced in thickness in the skiving process in which a machine cuts a bevel on the edge of the material on the flesh side, or underside of each piece. Some or all of the upper parts, particularly thick leather uppers, may also need to be reduced in thickness or made more even in thickness by a "splitting" machine. Each of these steps requires handling of the individual upper pieces and skilled manipulation to achieve the desired change in the upper.

After the upper pieces are prepared by skiving and splitting, in a typical process, the interlining is cemented to the upper in the doubling process to add thickness and to improve the comfort and smoothness of the interior of the shoe. This requires careful

alignment of the interlining and the upper. To further improve the comfort and to add strength, the insides of the seams are often "rubbed" to reduce their bulk and then reinforced with fabric tape that is adhesive coated. Similar fabric tape is also often applied to the edges of the uppers that are around the top of the shoe opening. Each of these top edges as well as other visible edges may also have cement applied to them prior to folding them into a narrow fold and heat-cementing or stitching the fold in place to provide a neat appearance to the edge.

If the shoe has eyelets, these are applied by a machine that punches, spaces, and aligns the holes and sets the eyelets in the appropriate place. The eyelets then are laced by a machine with thread so that the piece(s) are held in the correct position in the subsequent steps.

The upper pieces are stitched together after or during the fitting process depending on the manufacturing steps for the particular shoe. The stitching process may be by machine or by hand and may include reinforcement stitching at the front corners in laced shoes and decorative stitching.

In the final segment of the traditional shoe manufacturing process, the uppers are then shaped over a last (a shoe form shaped like a foot). A variety of lasting techniques may be used to assemble the upper and interlining over the last and to fasten them to the insole. In this process the heel, toe and side portions of the shoe upper are pulled into place around the last so that they are in the desired shape of the final shoe product. The shoe upper may then remain in that pulled position for several days to set the shape.

Alternatively, the position of the upper may be set by a heat setting process. The bottoms of the shoes are added in the "bottoming" process by cementing, molding or sewing. Laces are then added and the product is boxed and warehoused.

Summary of the Invention

Provided with the present invention is a component of a shoe comprising a multi-layered material embossed in a manner which serves several functions, including but not limited to closing or sealing of edges, incorporation of functional design or pattern lines to facilitate flexing for contouring to maintain shape, and for strain management. The embossing seals the layers of the material together at the edge and reduces the thickness of the material in the embossed regions. One layer of the multi-layered material is a breathable porous foam which, when subjected to heat, or other forms of fusing energy, becomes viscous to a point that an internal bonding of the foam cell matrix is accomplished.

The shoe component is any one of a number of different elements of the shoe. Possible components include an entire one-piece upper or overlay portions. The shoe component may have embossing away from the edges of the material, such as embossing to facilitate design or pattern. Such embossing serves to control shape and texture of the shoe component, and may additionally serve to provide specific strain performance factors in end use application.

Also provided in the present invention is a method of fastening together portions of a shoe. The method involves aligning the shoe portions and inserting a thermoplastic connector through the material of the shoe

portions. The thermoplastic connector is then subjected to sufficient energy to soften the thermoplastic connector. The shape of the connector is then deformed such that when it hardens its new shape restricts the shoe portions from separating from one another.

The first thermoplastic connector may be inserted through a second thermoplastic member as well as the aligned portions of the shoe. The connector may be subjected to a high frequency electromagnetic field of sufficient energy to melt the two pieces of the connector to the point that they adhere to one another, thus securing the shoe portions together.

Brief Description of the Drawings

Figure 1 is a sectional perspective view of the layered upper material prior to heat embossing.

Figure 2 is a sectional perspective view of the layered upper material after heat embossing.

Figure 3 is a plan view of a first embodiment of an embossed pattern for an upper.

Figure 4 is a plan view of a second embodiment of an embossed pattern for an upper showing one side of the upper.

Figure 5 is a plan view of a third embodiment of an embossed pattern for an upper.

Figure 6 is a plan view of a fourth embodiment of an embossed pattern for an upper.

Figure 7 is a plan view of a fifth embodiment of an embossed pattern for an upper.

Figure 8 is a perspective drawing of a shoe made from the first embodiment of the upper.

Figure 9 is a schematic drawing of placement of uppers in a multiple-upper cutting pattern.

Figure 10 is an elevational view of an embossing mold as used in the process of the invention.

Figure 11 is a partial sectional side view of the upper material on the bottom mold plate prior to embossing.

Figure 12 is a partial sectional side view of the upper material on the bottom mold plate after embossing.

Figure 13 is a perspective view of a mold used according to the process of the invention.

Figure 14 is a side view of a shoe having a quarter overlay secured by a thermoplastic rivet.

Figure 15 is a side view of the thermoplastic rivet of Figure 14.

Figure 16 is a plan view of a one-piece upper used in the shoe of Figure 14.

Figure 17 is a side view of a shoe having a quarter overlay, a forefoot stabilizer, and a tougue secured by thermoplastic rivets.

Figure 18A is a plan view of the one-piece upper used in the shoe of Figure 17.

Figure 18B is a cross section of Figure 18A.

Figure 19A is a plan view of two quarter overlays of a thermal plastic urethane material.

Figure 19B is a cross section of Figure 19A.

Figure 20A is a plan view of a forefoot stabilizer of a thermal plastic urethane material.

Figure 20B is a cross section of Figure 20A.

Figure 21A is a plan view of two quarter overlays of a heat embossed foam/fabric material.

Figure 21B is a cross section of Figure 21A.

Figure 22A is a plan view of a forefoot stabilizer of a heat embossed foam/fabric material.

Figure 23A is a perspective view of a thermoplastic fastener.

Figure 23B is a side view of an unfolded thermoplastic fastener.

Figure 23C is a rear view of a shoe upper partially fastened at the heel by a thermoplastic fastener.

Figure 24 is a side view of a casual shoe embodying the present invention.

Figure 25 is a plan view of a main upper portion used to form the shoe of Figure 24.

Figure 26 is a plan view of a quarter overlay in the shoe of Figure 24.

Figure 27 is a cross sectional view of the overlay of Figure 26 taken along line 27-27.

Figure 28 is an alternative quarter overlay.

Figure 29 is a side view of a shoe using the upper of Figure 28.

Detailed Description of the Preferred Embodiments

The present invention comprises a method for making shoes and shoe components and the shoes and shoe components made by this process.

Most types of shoes may be made with the method of the invention. Thus, flat heeled shoes, high-heeled shoes, and shoes with buckles, straps connected to both sides of the shoe and extending across the top of the foot, lacing, velcro attachment straps or other fasteners may be made with the process of the invention. Additional decorations or cut outs may also be added to the basic show pattern.

As shown in Figures 1 and 2, the upper 10 is preferably comprised of a plurality of layers and most preferably of three layers. Additional layers may be

added for durability or strength. A process known as a combining process which is well known in the footwear manufacturing field, may be used to make a layer of fabric adhere to each side of a foam core 12 layer. In the preferred embodiment, the layers are held together by neoprene cement. The bottom sheet (lining) is placed in a mold and coated with cement and then the foam layer is placed on the lining. Finally, another layer of cement is applied and the fluid layer is added. The mold is then closed to press the layers together. Other methods of layer formation may be used.

In a preferred embodiment, the layers are held together by adhesive systems of a thermo-set (cross-linked) nature. However, adhesives in the thermoplastic family may also be used providing they exhibit melting properties in excess of the process temperatures associated with the other components of the material. Alternatively, flame lamination techniques can be used which eliminate the need for adhesives altogether.

A preferred core material 12 is a foam product of the polyurethane family of an ether origin (i.e. polypropylene glycol), which is treated with a diisocyanate in the presence of water and catalyst agents. Density of preferred foams run 1.5 - 4.0 lbs/ft but foams of higher and lower density have application in some end use catagories. Many foam core materials originate from variations inside of the polyurethane family. Others utilizing polymer backbones which fall outside the polyurethane group can also be used as core materials.

In one preferred embodiment, the outer layer is a warp knit fabric classified as "tricot." The term refers

to a fairly wide range of finished goods, some of which are acceptable in a shoe molding process, and some which are not. In particular, two bar knits such as full tricots and warp lockknit have shown particularly good characteristics with regard to the molding process as well as end use.

In another preferred embodiment, the outer layer is a weft knit fabric of jersey, rib, or purl designation. Variations of the jersey designation show particularly good properties due to their dimensional equality in elasticity. Many other variations of weft knitted fabric have also shown good success in the process and end use.

In still another preferred embodiment, the outer layer is of the woven classification. In utilizing woven structure fabrics in the fabrication process, success is more dependent upon yarn schemes than in knit fabrics. While a characteristic of knitted structures is fabric stretch or elasticity, wovens possess lower stretch values due to the somewhat linear relationship between fabric and yarn width/length. Therefore, in utilizing woven materials in the process, it is necessary to focus on yarn elasticity properties. Methods of incorporating elasticity in yarns are well known and may include texturing or using bi-component or bi-constituent yarn or fiber.

A different preferred embodiment uses an outer layer made of a product of the leather designation. Such leathers may be derived from cow, steer, bull, water buffalo, pig, calf, etc. Hides can be tanned by methods which produce leather products compatible to the shoe fabrication method of the present invention. Considering the durability of general leather products, a property necessary to use leather successfully is

Petitioner adidas AG - Exhibit 1010 - Page 10
Skechers EX1013 p. 303
Skechers v Nike

multi-directional extension with a low corresponding loss of basic strength properties such as tear. In one application, this is accomplished by splitting the leather hide down to relatively low gauge (0.4 - 0.6 mm.) and laminating the resulting veneer to a substrate of substantial properties. Substrate nomination is contingent upon final component requirements.

In another preferred embodiment, the outer layer is of synthetic polymer products such as polyurethane, P.V.C., or synthetic rubbers, in either cellular or solid state. Industrial processes may be used to to fabricate products that use synthetic skins or coatings on a fabric substrate. Two such methods used extensively in the industry are "wet" and "dry" processing. Because of their low cost, such materials can be engineered in a multitude of methods to produce a wide range of physical properties and appearances.

Considerations governing choice of inner and outer layer materials include embossability of the outer layer, which includes scorch resistance to heat but also requires ability to take the embossing and retain the form in conjunction with the foam layer; sufficient tear strength of one or both layer; comfort of the inner layer; durability of both layers; appearance of the outer layer; and flexibility of both layers.

The uppers 10 are cut from the embossed, layered material using a variety of methods. These include, but are not limited to, standard knife edge die, knife edge gang die, dual function mold/die method, automated vertical die cutting, automated roller die cutting, automated laser method, and template/guide automated cutting. The die or template may be designed to cut one or more uppers at a time.

One example is the spacing of four upper patterns 18 as shown in Figure 9 on a single cutting die or template guide will allow interlocking of the patterns on the upper material and will minimize material waste. Generally, a square sheet of material about the size of the mold is used. After embossing, the embossed sheet is demolded and the molded upper is then cut out of the square sheet. A gang cutting die with a template guide is generally used for a multi-cavity mold.

The shape of the upper 10 is constrained by the shape and size of the foot but may be designed for a wide variety of shoe styles. As shown in Figure 3, beginning on one side of the shoe, the one-piece shoe upper 10 extends in a "U" or "V" shape from a first central back side 20 of the upper to a first shoe side 22 to the first side front 24, to the toe area 26; and then the second side extends in mirror image to the first side from the toe area 26 to the second side front 28, the second shoe side 30 and the second back side 32 of the upper 10. The dotted line in Figures 4-7 show the central point on each side of which the shape of the shoe is a rough mirror image of the other side, the difference between sides being that the shoe side 22 or 40 which is on the inside of the foot may be cut with a small indentation or other variation to assist in lasting the side of the shoe that will be on the inside of the foot. A strap 34 may extend over the top of the foot connecting the sides 22,30 or the side fronts 24, 28 (Figures 3 and 4); or each side may have a laceable strap 36 (Figures 5 and 6) or a strap from the other side. The upper 10 over the top of the foot may be solid without a cut away area 38 or there may be no strap(s) at all (Figure 7).

Before the layered material is cut (trimmed), it is placed in a heat molding press to emboss a design 40 on the material and to flatten the edges 42. The embossing process heat-fuses the edge seams including the upper edges 48 thus making the multi-layered material totally enclosed without stitching the edge seams and thus enables the labor-saving use of the one-piece upper.

Embossing 40 in the toe area 26 and side fronts 24,28 (Figure 3) helps maintain the toe box shape and embossing lines 40 on the strap 34 help curve the strap across the instep. Additional embossing adds to the rigidity of the shoe upper so that it better retains a desired shape. All of the embossing may be shaped for aesthetic styling. Edge 42 is the lasting margin that is lasted under during the lasting process. A logo may be placed on the shoe in a logo area 41 embossed on the shoe. The design may be formed on any portion of the shoe. In Figures 3-7, a variety of side designs are shown. The design may extend across the strap 34 as shown in Figures 3-4. It is important to note that the heat fusing and embossing of a design on natural materials such as cotton or leather as well as on nylons, polyesters, and other synthetic materials to form a three-layered laminate shoe upper is a unique and important aspect of this invention.

Embossing additionally serves to manage strain in end use. Since embossing lines are used extensively to create designs and patterns, it is possible to use these points, or add additional points which become part of the design pattern. This embossing then serves to control upper component strain by "locking off" outer shell or substrate fiber length. This technology serves to provide the shoe designer with unlimited control over

shoe upper end use dynamic properties, by allowing extensive adjustment of specific modulus properties in locations of stress and associated strain. For example, it is well known that basketball shoe top collars which are properly functional stretch to a degree to allow the wearer a snug fit around the lower portion of the leg when fully laced. However, the shoe portions known as the in/out quarters, when properly engineered, require stretch properties which are considerably less than those of the top collar. By using the described method, a shoe designer may make function an inherent part of the shoe design. The method allows function to be incorporated into the shoe in the fabrication step itself.

A typical embossing mold 100 which is used in the process of the invention is comprised of hydraulic cylinders 102 and 104 that drive a top press plate 106 against a bottom press plate 108, while mold 110 is located in between (Figure 10). Both of the press plates 106,108 contain heating elements 112 and 114. The heating elements 112,114 heat the press plates 106,108 which in turn heat the top mold plate 116 and the bottom mold plate 118 to the desired temperature. It is important to note that it is possible to use different temperature settings between the top press plate 106 and the bottom press plate 112 during the molding operation. This allows the top mold plate 116 to be either a higher or lower temperature than bottom mold plate 118 of mold 110 during the same molding process, thus allowing a more heat sensitive material such as thermoplastic urethane or PVC to be used on one of the surfaces.

For example, Figures 11 and 12 show partial cross sections of mold 110 and an upper prior to and during the embossing process. The use of mold alignment pins 120 on

one of the mold plates as shown in perspective view in Figure 13 and mold pin alignment holes 122 enables proper alignment of the mold plates 116, 118. If outer layer 14 happens to be a heat sensitive material such as PVC, mold press plate 106 may be set at a lower temperature so as not to heat top mold plate 116 above the softening point of layer 14. The temperature of bottom mold plate 118 may or may not need to be increased to compensate for the lower temperature of top plate 116 in order to achieve the proper heat fusing of layers 14 and 16 to foam core 12. After the desired heating time, the top press plate 106 is raised and the embossing mold 110 is removed. The embossed, molded upper is removed and is ready for trimming of the excess material. In a preferred method of the invention with polyurethane foam, a three minute heating cycle at 200 degrees C is used. This temperature, in the presence of molding pressure, is adequate to accomplish internal cell wall bonding. Such bonding is a consequence of the heat and pressure which renders the cell matrix viscous to a point of internal tack. This internal tack accomplishes setting of the areas of embossing. Although the heating of the foam is likely to be to a temperature less than its melting temperature, the embossed regions are here referenced as melted regions. Leather products, fabrics of natural and synthetic fiber, and synthetic material of P.V.C or polyurethane in combination with the foam can withstand this heating treatment without distortion or degradation of original physical properties.

As an alternate method of embossing, ultra-sonic or high frequency welding techniques could be used for embossing materials such as certain plastics that are not porous or discontinuous and have the requisite

characteristics to enable embossing upon exposure to the high frequencies. High frequency heat is produced by using a transformer to raise the main voltage, a rectifier to change alternating current to direct current, and an oscillator valve to stop and start the current at speeds of about 28 million cycles per second or greater, to establish a field between two metal plates.

High frequency heating differs from radiant and conducted heat in that the temperature is raised uniformly throughout a material without a necessary waiting period for heat to spread from an exterior heat source to the interior of the material. In using high frequency heating with the invention an oscillating electronic field is created between two surfaces between which is positioned the upper material. Exposure to this field results in movement of the molecules in the upper and uniform generation of frictional heat throughout the upper. The use of a high frequency heating field plus pressure from the protruding portions of a mold result in the embossed design on the upper. The mold may also be used to cut the perimeter of the upper by having a raised edge around the outside edge of the mold.

High frequency welding with a welding die also may be used to fuse two pieces of material, such as the two back edges of the upper, or to add extra components to the upper (such as a tongue, trim, buckles, etc.). High frequency (HF) welding is particularly suited to such materials as PVC and would allow the fusing of color pigments or appliques to the embossed areas.

After the upper 10 is completely embossed, a back strip 44 is attached to the back sides 20, 32 of the upper 10 using stitching methods known in the art as

shown in Figure 8. The back strip 44 may be a straight narrow strip of 3/8 to 1/2 inch width and approximately double the length of the backside so that it may be sewn to both the inside and outside of the back shoe seam forming a fold 46 at the top edge 48 of the shoe 50. Alternatively, the back strip 44 may only be placed on the exterior to the shoe 50. The back strip 44 may also be decoratively designed in color and/or shape. If the back strip 44 is omitted, an alternative method of attaching the back sides of the upper, such as overlapping the back sides and stitching, or heat embossing the two sides together may be used.

According to a method of the invention, the shoe 50 is lasted with any of several conventional techniques. Preferably, of these techniques, cold cement lasting is used because it is the simplest lasting method and is less costly than others, but California lasting (full sock lasting) may also be used. The insole board that is used is preferably made of non-woven, cellulose base fiber board prepared by conventional techniques, but it may be made of other hard or soft fiber lasting boards. The sock liner preferably is made of Tricot-covered rubber sponge, but it could be made of any fabric-covered cushioning material. When the shoe is lasted, lines A and B are aligned in parallel in shoes with a strap 34 (Figure 3).

Following attachment of the back strip and lasting, the bottom 52 of the shoe is attached, preferably by a cementing method. Cold cementing is preferably used because it is inexpensive and simple. The bottom 52 is preferably made using molded ethyl vinyl acetate (EVA) by methods known in the art; however cut EVA may be used as may thermal plastic rubber. Other bottoming methods that

do not entail the cement process may be used. These would require "direct-attached" polyurethane or thermal plastic rubber. Both of these latter techniques require California lasted shoes.

A preferred embodiment of the invention involves preparation of a three layered upper having an outer layer which is a warp knit, weft knit, woven fabric, leather product, or synthetic coated material. The central layer of the material is a polyurethane foam, and the inner liner may be any one of a number of materials. The laminate is heat embossed at 200 degrees C for approximately three minutes, after which the backsides of the the upper are attached together by means of stitching to a back strip. The upper is then lasted and attached to the bottom of the shoe by cold cementing or other conventional means.

A number of different components of a shoe may be made using heat embossing methods such as those previously described for the one piece upper. The heat embossing of shoe components is decorative as well as functional in several ways. For a multi-layered material having a layer of porous foam such as polyurethane foam, the heat and pressure of the heat embossing selectively causes the inner cell wall matrix to become viscous to a point that the resulting tack is adequate to accomplish bonding. Thus, when heated, the polyurethane foam becomes a strong bonding adhesive which adheres firmly to surrounding material. For a material having the foam as a central layer between two outer fabric layers, the embossing serves to firmly seal the three layers together. The shoe components of the present invention are embossed along the edges and are thus sealed along

the edges, removing the need for any edge stitching to hold the material layers together.

Another function of the heat embossing is to reduce the thickness of the material in the region of the embossing. Since shoe components are often joined at the edges, it is desireable to have the edges relatively thin compared to the rest of the material to prevent from forming an unusually thick region of the shoe where the connected shoe components overlap. Heat embossing along the edges of a shoe component provide this thinner region without the necessity of skiving, which is the traditional method of edge thickness reduction.

Shown in Figure 14 is a side view of a typical shoe 130 made with a heat embossing process. The shoe 130 has a heat embossed upper 132 and a quarter overlay 134 which is also heat embossed. The edges of the overlay 134 are embossed to reduce and seal them, while a more central region 135 of the overlay is embossed to hold eyelets 136, which in turn hold the laces of the shoe 130. The overlay 134 is stitched to the lasting margin of the upper and may be additionally secured by a thermoplastic rivet 138. During assembly, the two-piece rivet 138 is passed through aligned holes in both the overlay 134 and the upper 132.

A side view of thermoplastic rivet 138 passing through two pieces of material 139,141 shown in Figure 15. Front rivet plate 140 has two pins 142 which fit into the receiving holes 146 of back plate 144. Heating of the thermoplastic rivet 138 causes the two pieces of the rivet to melt and bond together forming a secure, permanent connection. This heating is preferably done with a high frequency electromagnetic field, which is particularly good for providing uniform heating of the

thermoplastic material. Alternative heating methods such as ultrasonic heating or thermal welding may also be used. The pins 142 of the front plate 140 of the rivet 138 may extend through holes 146 and beyond the rear surface of back plate 144. In such a case, pressure applied to the back of the rivet 138 during heating then causes the end of the pins 142 to spread and flatten out along the rear surface of the back plate 144. Thus when the rivet hardens, the pins 142 are even further prevented from moving back through the holes in the back plate 144.

Using certain thermoplastic materials, the thermoplastic rivet 138 may alternatively consist of just the front plate 140. Once the pins 142 pass through the material to be joined, they are heated and the pins 142 are flattened out to restrict the rivet 138 from passing back through the material. Such a deformation of the rivet 138 may be accomplished through the use of a pressure device which applies pressure to the rivet 138 during heating.

Figure 16 shows a plan view of the upper of the shoe in Figure 14. Quarter region 148 is embossed flat to provide a seat for a quarter overlay 134. The lasting margin 150 is also embossed to seal the edge and to reduce the thickness of the lasting margin 150 without skiving. The upper is shown with one of two quarter overlays 134 in place. The other quarter overlay is left out to show the quarter region 148 of the upper, which is embossed flat to accomodate an overlay 134. Embossing this region 148 prevents the shoe from being abnormally wide in the overlapping quarter region of the shoe. Rivet holes 149 are also shown in both the upper 132 and the quarter overlay 134.

In Figure 17 is shown a shoe 152 having an upper 153 and a number of overlay components. A heel stabilizer 154, a quarter overlay 156, and a forefoot stabilizer 158 are each attached to the shoe 152 during a bottoming process. A tongue 160 is also included, and both the tongue 160 and the forefoot stabilizer 158 are attached to the vamp 162 of the upper by way of a thermoplastic rivet 164. In this case the rivet 164 serves to secure both the tongue 160 and the forefoot stabilizer 158, thus providing an economical use of connection elements.

The overlay components 154,156,158 of the shoe 152 of Figure 17 are preferably made by an injection molding process using materials such as thermoplastic elastomers, or in some cases engineering thermoplastics. Some alternatives to the injection molding method include flow molding, casting, and extrusion process. The molded overlays are easy and inexpensive to produce and add support and aesthetic value to the shoe. Other materials such as the foam/fabric material of the upper or a natural material such as leather are also used as overlay material. A combination of different overlay components of different materials is often used on the same shoe.

Both the tongue 160 and the upper 153 of the shoe 152 are formed of a material with a central resilient foam layer. Heat embossing seals and reduces the material in selected areas. Figures 18A and 18B show a plan view and a cross sectional view, respectively, of the upper 153 of Figure 17. The lasting margin 156 of the upper 153 is embossed. Futher embossing of the upper 153 provides seats for the overlays shown in the assembled shoe of Figure 17. Since the non-shaded portions of Figure 18A are the regions depressed by heat embossing, it is apparent that the embossed regions seat

the heel stabilizer 154, the quarter overlay 156, and the forefoot stabilizer 156 perfectly. The cross section of Figure 18B shows the relative thickness difference between an embossed region 168 and a non-embossed region 170 of the upper 153.

Figure 19A is a plan view of the quarter overlays 156 and 156' of the shoe 152 of Figure 17 (overlay 156' is not shown in Figure 17). It can be seen from this view that the injection molded components are fabricated in a manner to reduce thickness gauge in the bottom region. These portions of the overlays are turned under during bottoming of the shoe, and it is therefore advantageous to have the thickness reduced in these regions 172. Figure 19B is a cross section of one of the quarter overlays 156, 156' and shows the difference in thickness in different regions of the TPU material. Much of the molded pattern is decorative, but it additionally serves to allow a certain degree of bending movement to the overlay. The mold also gives shape and texture to the surface of the overlay.

Shown in Figure 20A is a plan view of the forefoot stabilizer 158 of the shoe 152 of Figure 17. Like the quarter overlays 156, 156', this particular forefoot stabilizer 158 is made of a TPU material. The forefoot stabilizer is made flat in a central region 174 and at the ends 176 of the extending portions 177. Molded lines 178 in the remainder of the material provide texture and improve bending properties in this region. Holes 180 in the central region 174, support the pins 142 of thermoplastic rivet 138. The cross section of Figure 20B shows the difference in thickness between the different regions of the forefoot stabilizer.

Figure 21A is a plan view of an alternative embodiment of the quarter overlays 156 and 156' of Figures 17 and 19. Quarter overlays 180 and 180' still fit within the recessed regions of the shoe upper 153 of Figure 17, but are made of foam/fabric material instead of a TPU. The foam/fabric material is like that previously disclosed for the upper, and is embossed along the edges to seat the material. The quarter overlays 180 and 180' are also embossed at the bottom portions 182 and in the eyelet regions 184. The eyelets (not shown) are mounted in the regions 184, and the bottom portions 182 are attached to the lasting margin of the upper 153 prior to bottoming of the shoe. The raised non-embossed central regions 186 of the quarter overlays 180, 180' are instrumental in keeping the shape of the overlays. A cross section of one of the quarter overlays is shown in Figure 21B. From this cross section the thickness difference between the embossed and non-embossed regions of the foam/fabric material is apparent.

The forefoot stabilizer 188 of Figure 22A is similarly shaped to the forefoot stabilizer 158 of Figures 17 and 20, but is made of the foam/fabric material. The forefoot stabilizer 188 is embossed in the bottom regions 190, in the eyelet regions 192, in the rivet region 194, and along the edges. The embossing along the bottom region 190 allows proper attachment to the shoe upper. The embossing in the eyelet regions 192 provides a flat region for attachment of the eyelet (not shown). The embossing in the rivet region 194 provides a flat, recessed region in which the rivet 164 fits, passing through rivet holes 196. The raised, non-embossed region 198 gives shape and texture to the surface of the forefoot stabilizer 188. A cross section

of the forefoot stabilizer is correspondingly shown in Figure 22B.

Figures 23A-23C show a folding thermoplastic fastener 200 designed particularly for binding together the left and right heel portions of an upper. The fastener 200 is shown folded up in Figure 23A and partially unfolded in Figure 23B. Two rows of pins 202 on fastener rear plate 204 align with the two rows of holes 206 on fastener hole plate 208 when the fastener i folded over. As shown in Figure 23C, the reduced areas of the heel portions 210 of a shoe upper 212 are punched with holes 214 which align with the pins 202 of the fastener 200 when the heel portions 210 are pulled together. The pins 202 of the fastener 200 are then pushed through the holes 214 of the heel portions 210. The fastener is then closed along a hinge between the rear plate 204 and the hole plate 208, such that the holes 206 in the hole plate 208 engage the ends of the pins 202 sticking through the heel portions 210. Once engaged, the fastener is heated to melt the pin/hole connections such that when rehardened they are permanently secured. Decorative cover plate 216 is hinged to hole plate 208 and is folded over to cover the pin/hole connections. The cover plate 216 has a lip which meshes with a lip on the hole plate 208 to keep it tightly secured when folded over and pressed into engagement with the hole plate 208.

As noted above, the embossing allows for control of stress, contouring and flexibility of various portions o the shoe. Figure 24 illustrates a women's casual shoe which utilizes such functional embossing. The shoe uppe is formed of a one-piece upper, illustrated in Figure 25 and quarter overlays, one of which is illustrated in

thickness of the embossed lines 226 and 228 also allows bending along the embossing lines.

Figure 28 illustrates an alternative quarter overlay, and a shoe incorporating that overlay is illustrated in Figure 29. In this design, stretch from the eyelets to the sole is controlled by the horizontal embossing lines such as 236. Depending on the weave of the fabric layers, some stretching is allowed between the embossing lines. In this design, stretching from the eyelets to the shoe must be limited to a larger extent by the weave of the fabric than in the prior design, but the embossing lines allow for greater flexibility which allows the overlay to fold over the foot more readily.

The invention has great industrial applicability particularly in countries with a labor shortage or where it is essential to minimize labor costs to be competitive. The method of the invention may be used in the shoe manufacturing industry to make durable, attractive, inexpensive shoes through elimination or diminishing of most of the labor-intensive shoe fitting steps, such as skiving, multiple-piece stitching, prefitting, splitting, interlining, and edge taping.

While the invention has been described with reference to specific embodiments thereof, it will be appreciated that numerous variations, modifications, and embodiments are possible, and accordingly, all such variations, modifications, and embodiments are to be regarded as being within the the spirit and scope of the invention.

Petitioner adidas AG - Exhibit 1010 - Page 26
Skechers EX1013 p. 319
Skechers v Nike

CLAIMS

1. A shoe comprising an upper portion formed substantially of resilient foam material sandwiched between inner and outer layers, the upper portion being embossed by melted, depressed regions of the foam.

2. A shoe as claimed in Claim 1 wherein the upper portion has an embossed lasting margin.

3. A shoe as claimed in Claim 1 wherein edges of the upper portion are embossed to seal said edges.

4. The shoe component of Claim 1 wherein the resilient foam material is a porous breathable foam which in the presence of heat and pressure transforms internally to a point that the inner cell wall matrix of the foam becomes viscous, providing sufficient tack to accomplish a bonding within the matrix.

5. The shoe component of Claim 1 wherein embossing of the shoe component provides a predetermined functional design pattern on the shoe component.

6. The shoe component of Claim 1 wherein embossing of the shoe component contributes to specific strain performance factors in the shoe component.

7. The shoe component of Claim 1 wherein the embossing of the shoe component contributes to the maintaining of the proper shape of the shoe component.

Petitioner adidas AG - Exhibit 1010 - Page 27
Skechers EX1013 p. 320
Skechers v Nike

8. The shoe component of Claim 1 wherein the shoe component is a one-piece upper.

9. The shoe component of Claim 1 wherein the shoe component is an eyestay overlay.

10. The shoe component of Claim 1 wherein the shoe component is a quarter overlay.

11. A component of a shoe comprising a multi-layered material embossed along the edges of the material, the embossing sealing the layers of the material together at the edge and reducing the thickness of the material in the embossed regions.

12. The shoe component of Claim 11 wherein the multi-layered material includes a layer of porous breathable foam which in the presence of heat and pressure transforms internally to a point that the inner cell wall matrix of the foam becomes viscous, providing sufficient tack to accomplish a monogamous bonding within the matrix.

13. The shoe component of Claim 1 wherein the shoe component is further embossed away from the edges of the material.

14. A shoe comprising an upper portion having back sides, sides and a toe area formed from a single sheet of material, the material being selectively embossed relative to the shoe structure such that depressions embossed in the material help maintain a proper shape of the shoe.

15. A shoe as claimed in Claim 14 wherein the shoe comprises a depression curved about the toe area to separate upper and side portions of the toe area.

16. A shoe as claimed in Claim 14 wherein said upper portion comprises a strap formed between sides of the shoe, the strap having transverse depressions thereacross.

17. A shoe as claimed in Claim 14 wherein said upper portion has a depressed lasting margin.

18. A shoe as claimed in Claim 14 wherein upper edges of back sides and sides of said upper portion are sealed by depressions.

19. A shoe as claimed in Claim 14 wherein the sheet of material comprises a resilient foam layer sandwiched between inner and outer layers.

20. A shoe as claimed in Claim 14 wherein the said upper portion has a depressed lasting margin.

21. A shoe as claimed in Claim 14 wherein upper edges of back sides and sides of said upper portion are sealed by depressions.

22. A shoe comprising an upper portion having back sides, sides and a toe area formed in a single sheet of material, the sheet of material comprising resilient foam material sandwiched between inner and outer layers, the material being embossed by melted, depressed regions of the foam to help maintain the shape of the shoe, the depressed regions including a lasting margin and upper edges of the back sides and sides.

23. A shoe as claimed in Claim 22 comprising a depression curved about the toe area to separate upper and side portions of the toe area.

24. A shoe comprising a plurality of heat-embossed, multi-layered shoe portions fastened together with a thermoplastic connector, the connector passing through the material of the connected portions and being such that once heated it restricts separation of said materials.

25. A shoe as claimed in Claim 24 wherein the thermoplastic connector comprises a first member having pins which extend through the material being fastened together, and a second member having holes which engage the pins of the first member while they are extended through said material.

26. The shoe of Claim 24 wherein the shoe portions comprise the left and right heel portions of a one-piece upper.

27. The shoe of Claim 24 wherein the multi-layer composition of said shoe portions includes a central layer of porous foam sandwiched between an inner layer and an outer layer.

28. A method of making a shoe component, comprising:

fabricating the shoe component in a desired shape from a multi-layered material; and

embossing the shoe component in select regions, the embossing sealing the layers of the material together at the edge and reducing the thickness of the material in the embossed regions.

29. The method of Claim 28 wherein said embossing of the shoe component comprises embossing with heat.

30. The method of Claim 28 wherein embossing said shoe component comprises embossing with high frequency energy.

31. The method of Claim 28 wherein said shoe component comprises a one-piece upper.

32. The method of Claim 28 wherein said shoe component comprises a multi-layered material having an outer layer, a resilient central layer, and an inner layer.

33. The method of Claim 32 wherein said resilient central layer is a porous foam which when heated, melts to a bonding adhesive.

34. The method of Claim 32 wherein said outer layer and said inner layer are tricot.

35. The method of Claim 32 wherein said outer layer and said inner layer are woven cotton.

36. The method of Claim 32 wherein the outer layer comprises leather.

37. The method of Claim 32 wherein said central resilient layer comprises polyurethane.

38. A method of fastening together portions of a shoe, the method comprising:

aligning the shoe portions with one another in a desired fashion;

inserting a thermoplastic connector through the shoe portions such that the shoe portions are adjacent one another with the thermoplastic connector passing through each of them;

subjecting the thermoplastic connector to sufficient energy to melt the thermoplastic connector such that when rehardened, the connector restricts the shoe portions from separating from one another.

39. The method of Claim 38 wherein the thermoplastic connector comprises a first member having pins which extend through the shoe portions, and a second member having holes which engage the pins of the first member while the connector is subjected to the melting energy.

40. The method of Claim 38 wherein the shoe portions comprise the left and right heel portions of a one-piece upper.

41. The method of Claim 38 wherein the shoe portions include a tongue.

42. The method of Claim 38 wherein the shoe portions include a portion formed of a multi-layer material, the material having a layer of porous foam, and heat-embossed depressed regions in the material.

43. The method of Claim 38 wherein the shoe portions include an overlay.

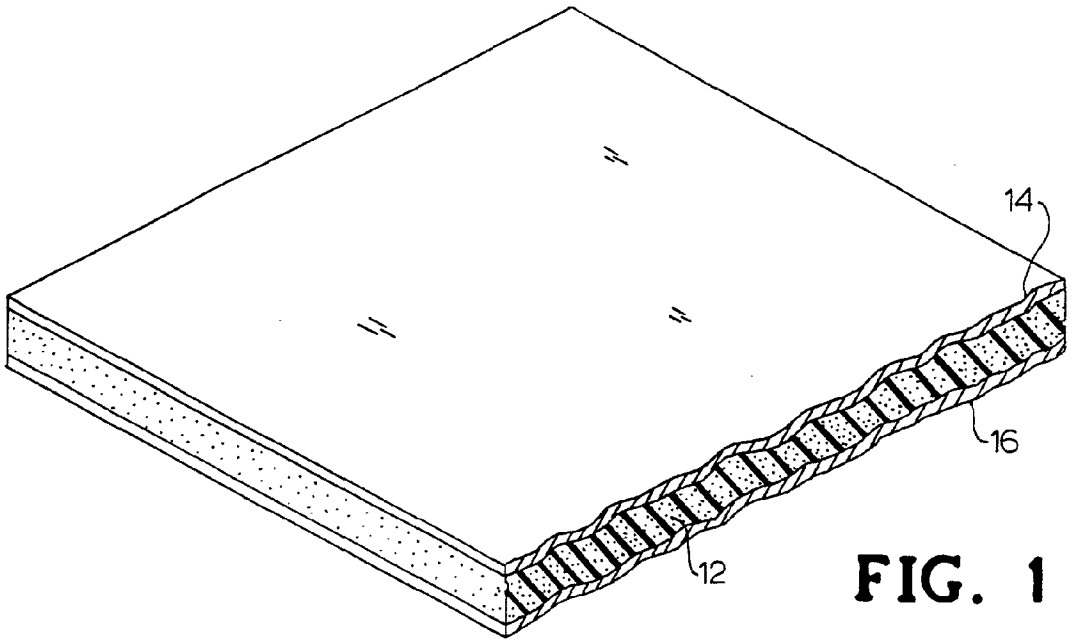


FIG. 1

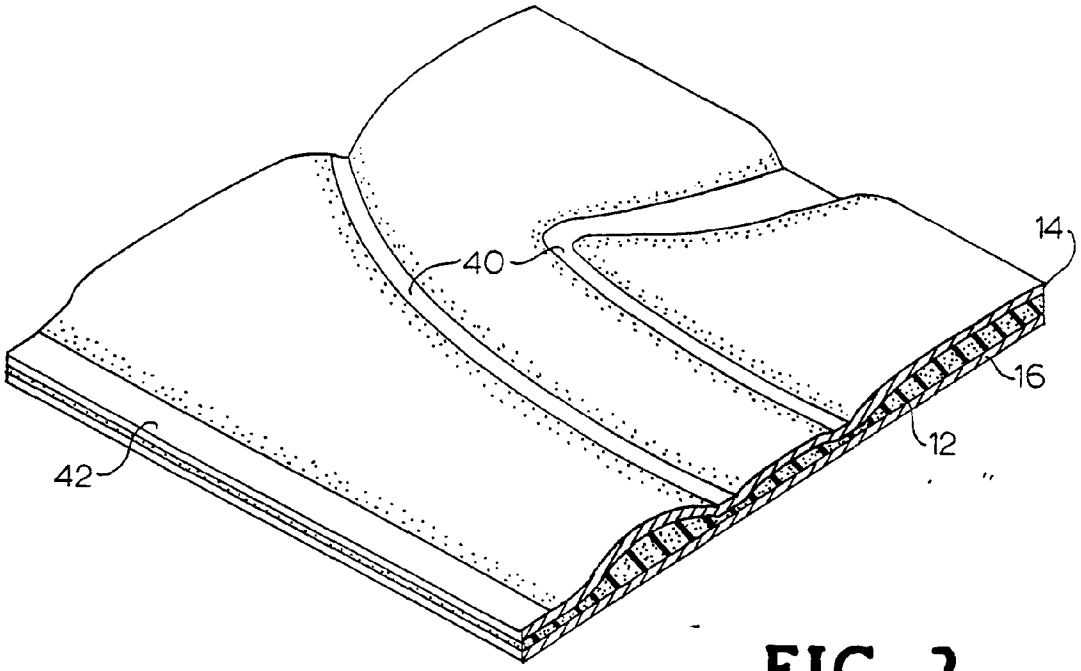


FIG. 2

Petitioner adidas AG - Exhibit 1010 - Page 34
Skechers EX1013 p. 327
Skechers v Nike

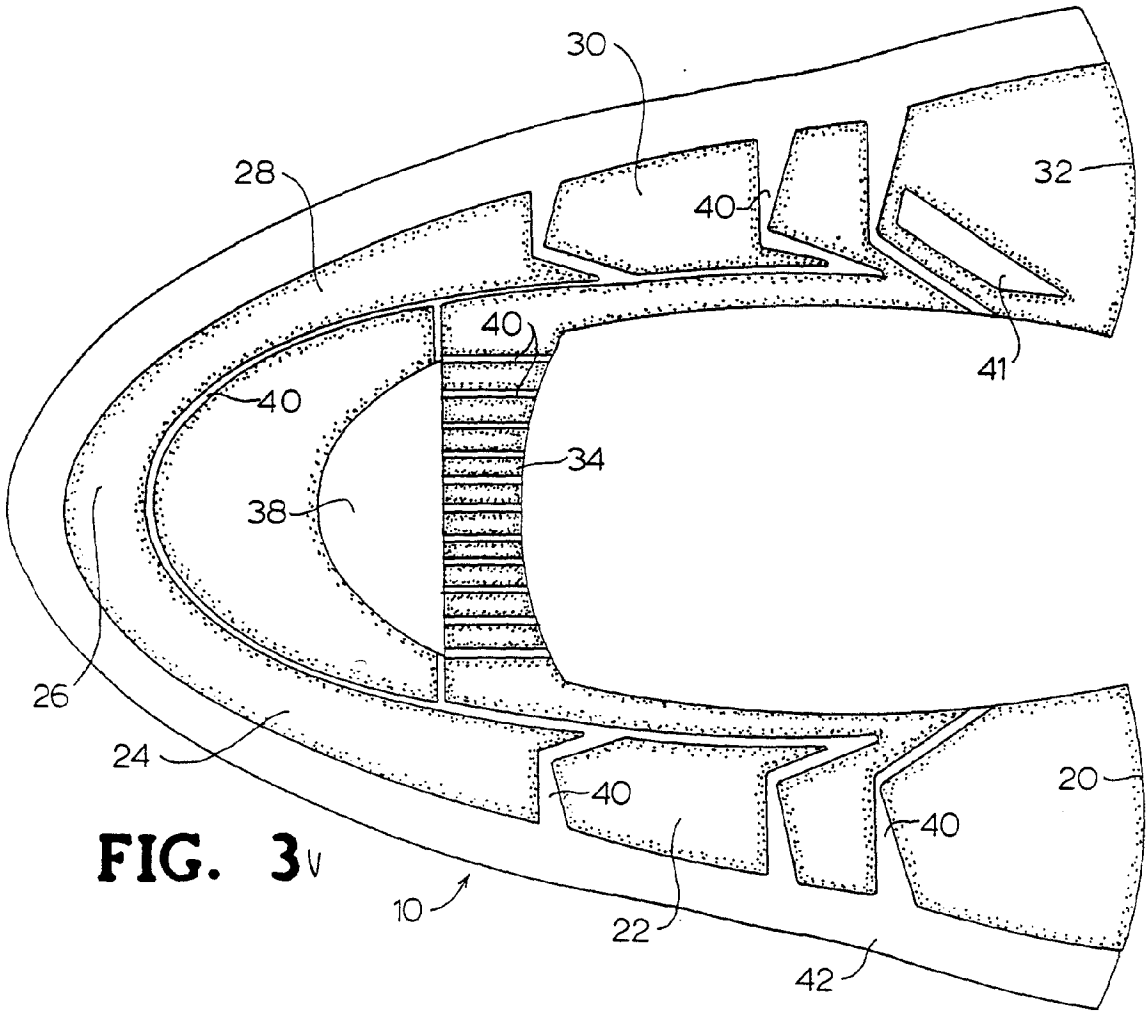


FIG. 3

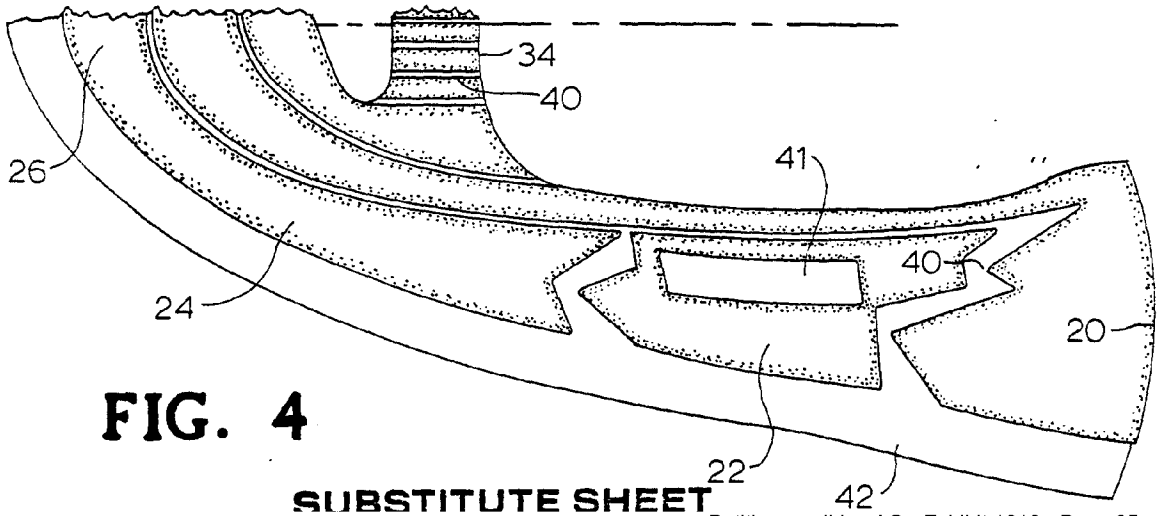


FIG. 4

Petitioner adidas AG - Exhibit 1010 - Page 35
Skechers EX1013 p. 328
Skechers v Nike

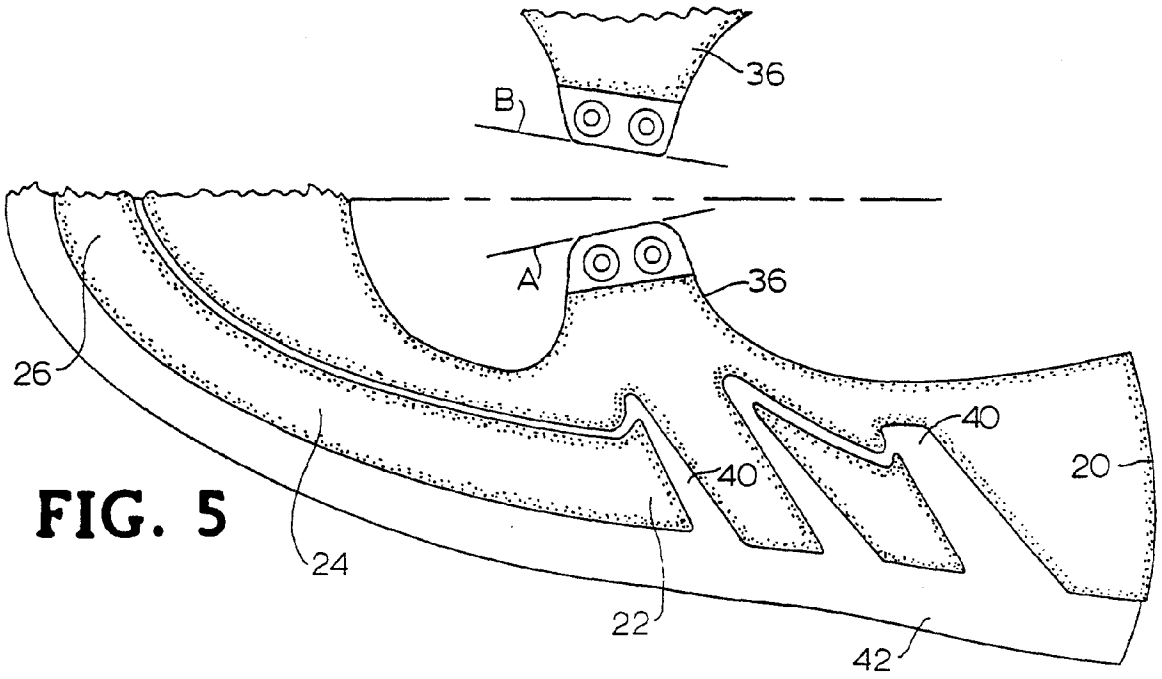


FIG. 5

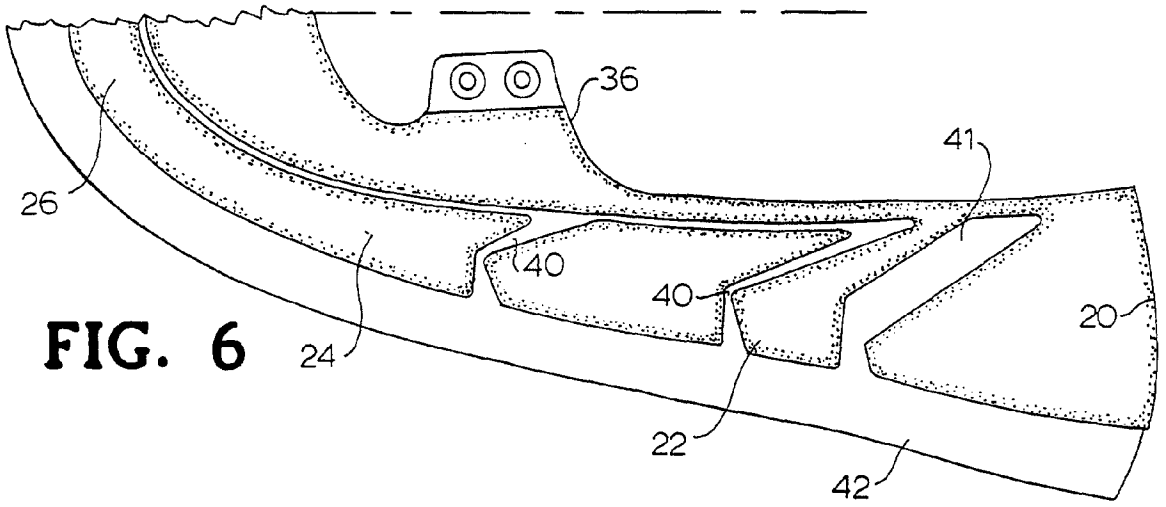


FIG. 6

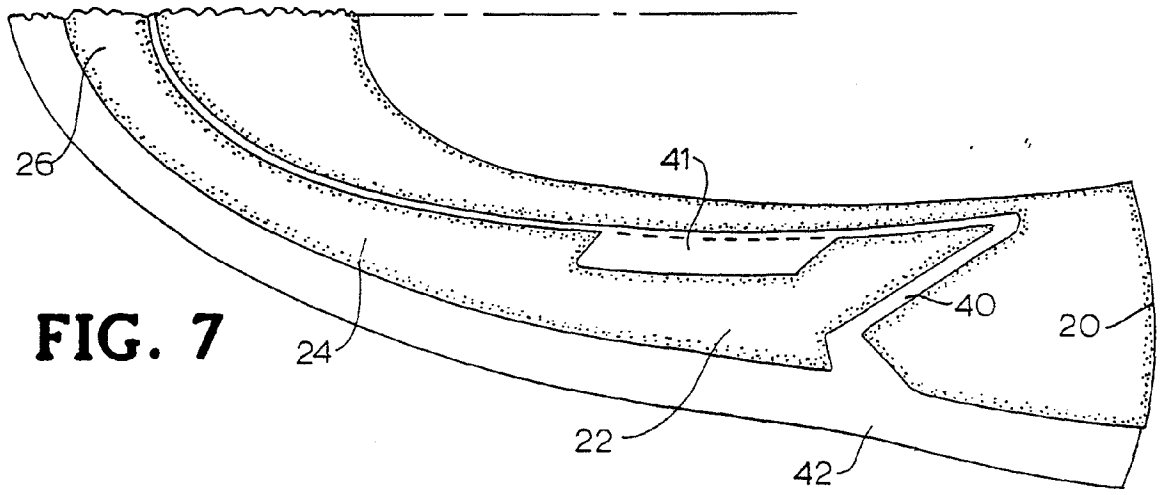


FIG. 7

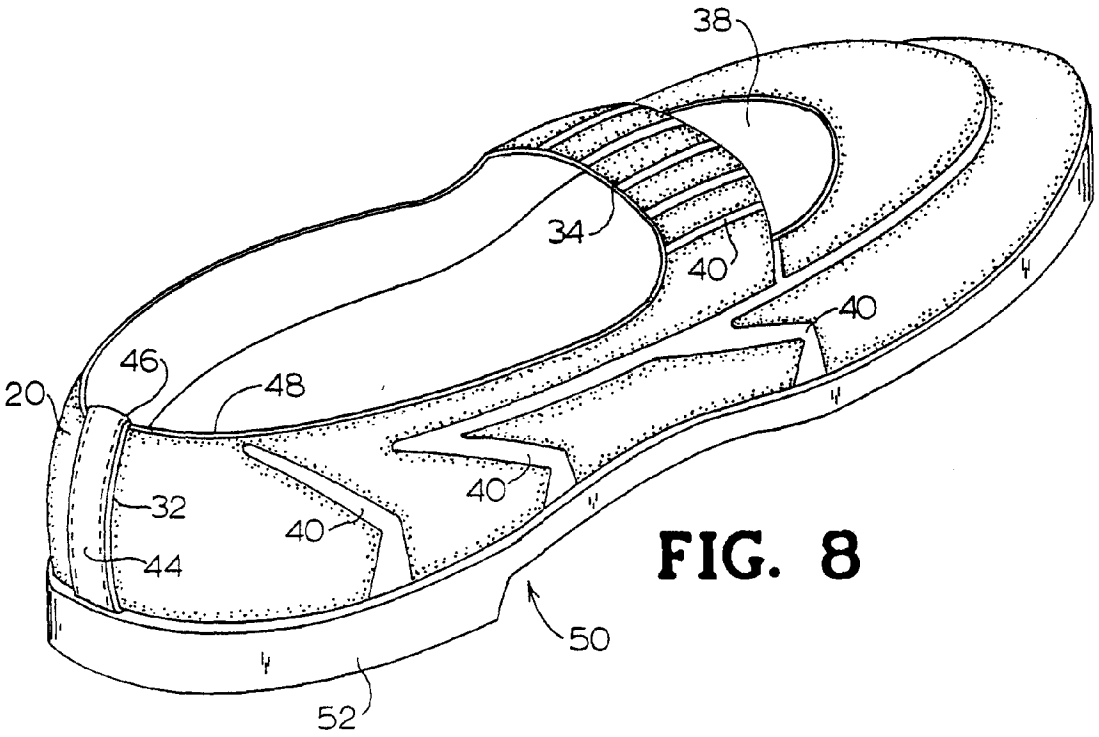


FIG. 8

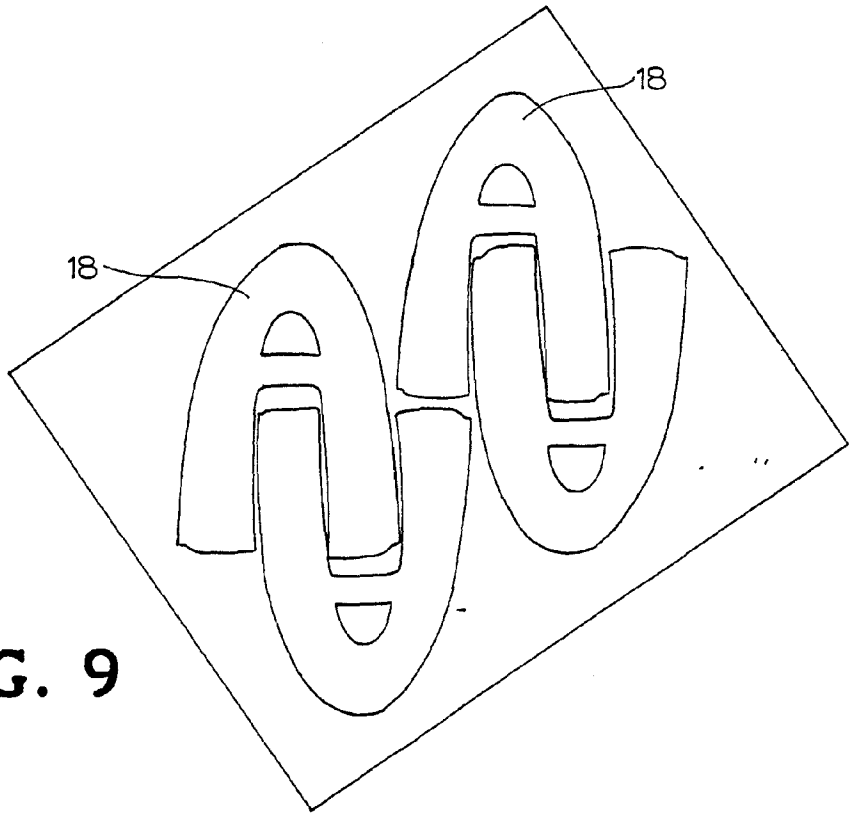


FIG. 9

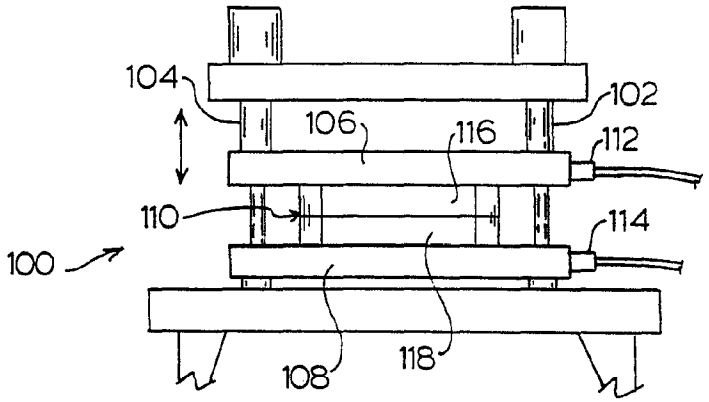


FIG. 10

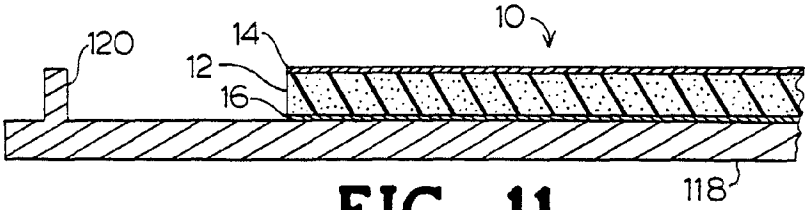


FIG. 11

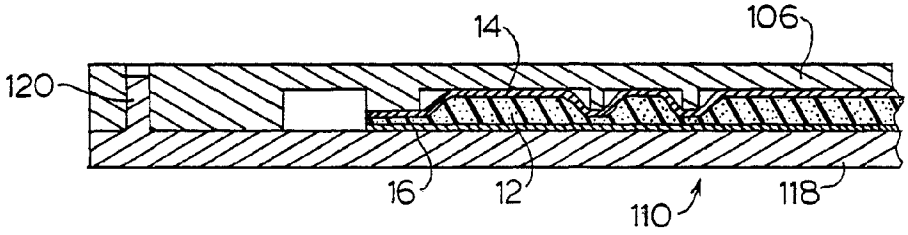


FIG. 12

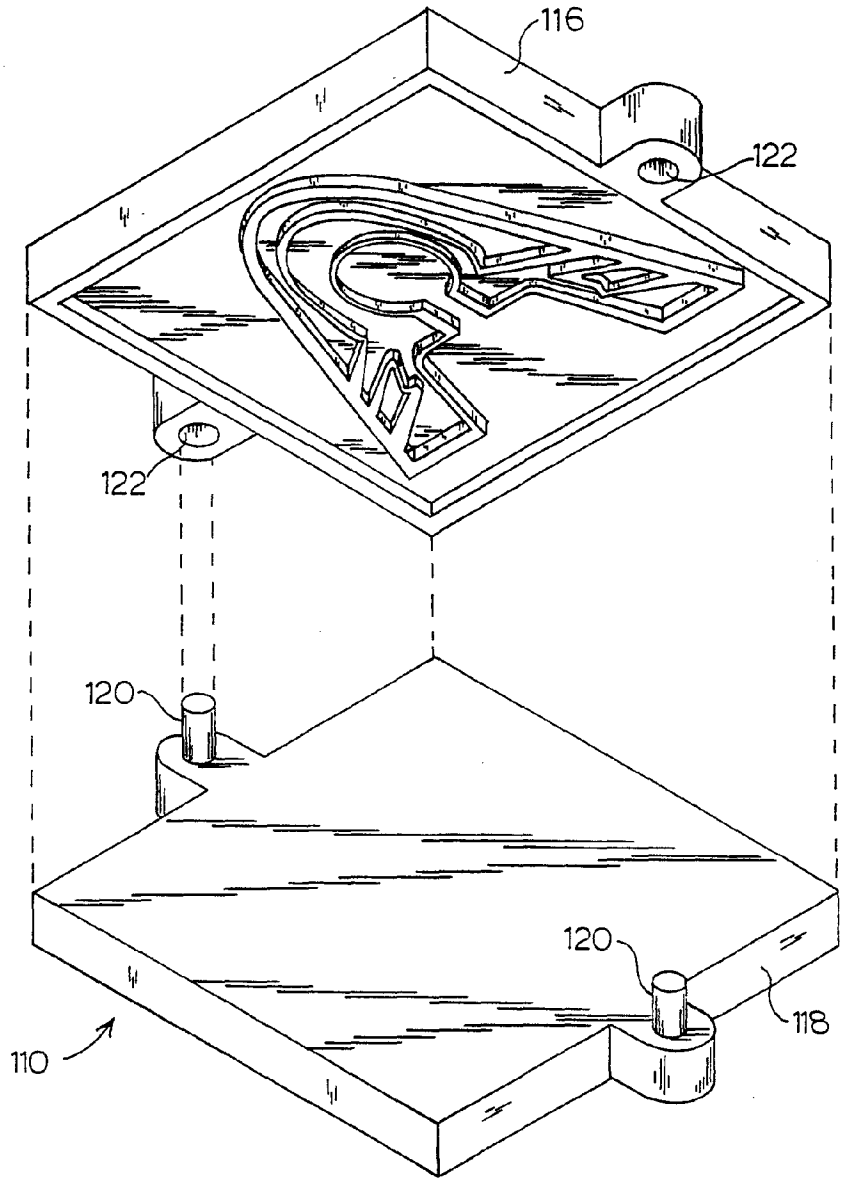


FIG. 13

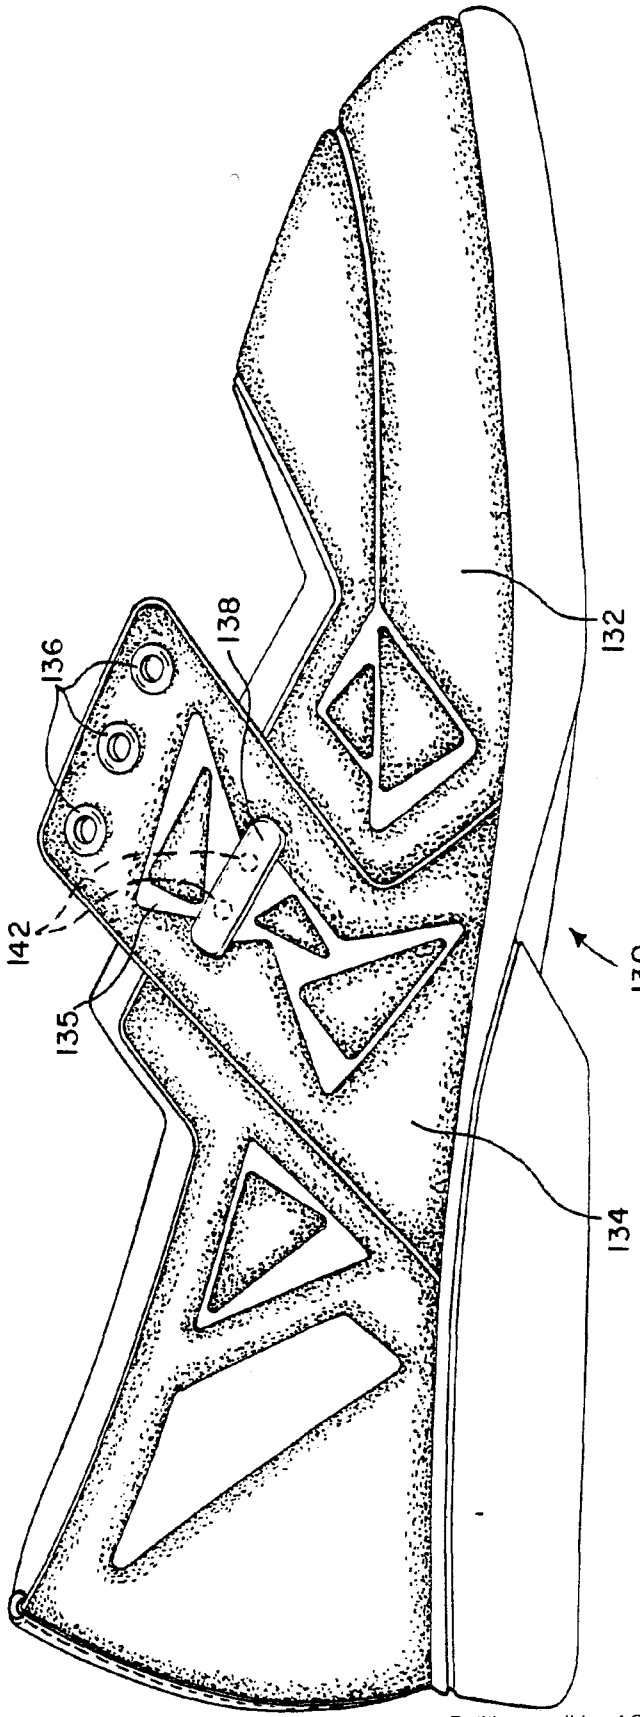


FIG. 14

Petitioner adidas AG - Exhibit 1010 - Page 40
Skechers EX1013-p 333
Skechers v Nike

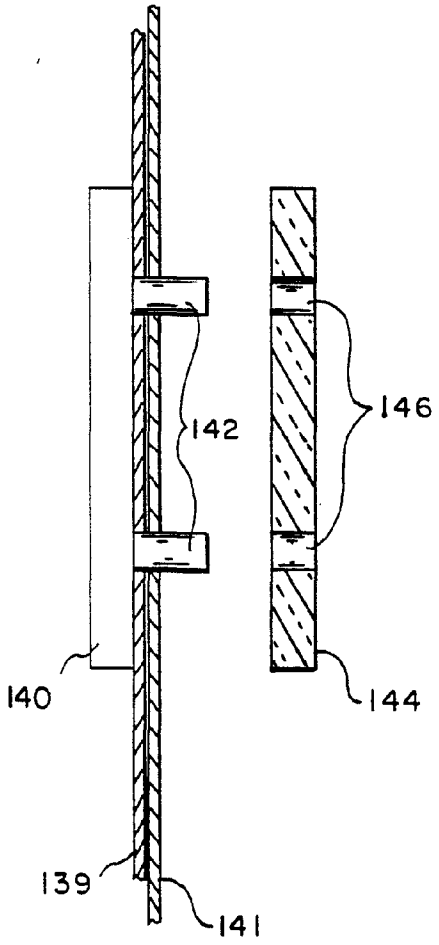


FIG. 15

Petitioner adidas AG - Exhibit 1010 - Page 41
Skechers EX1013 p. 334
Skechers v Nike

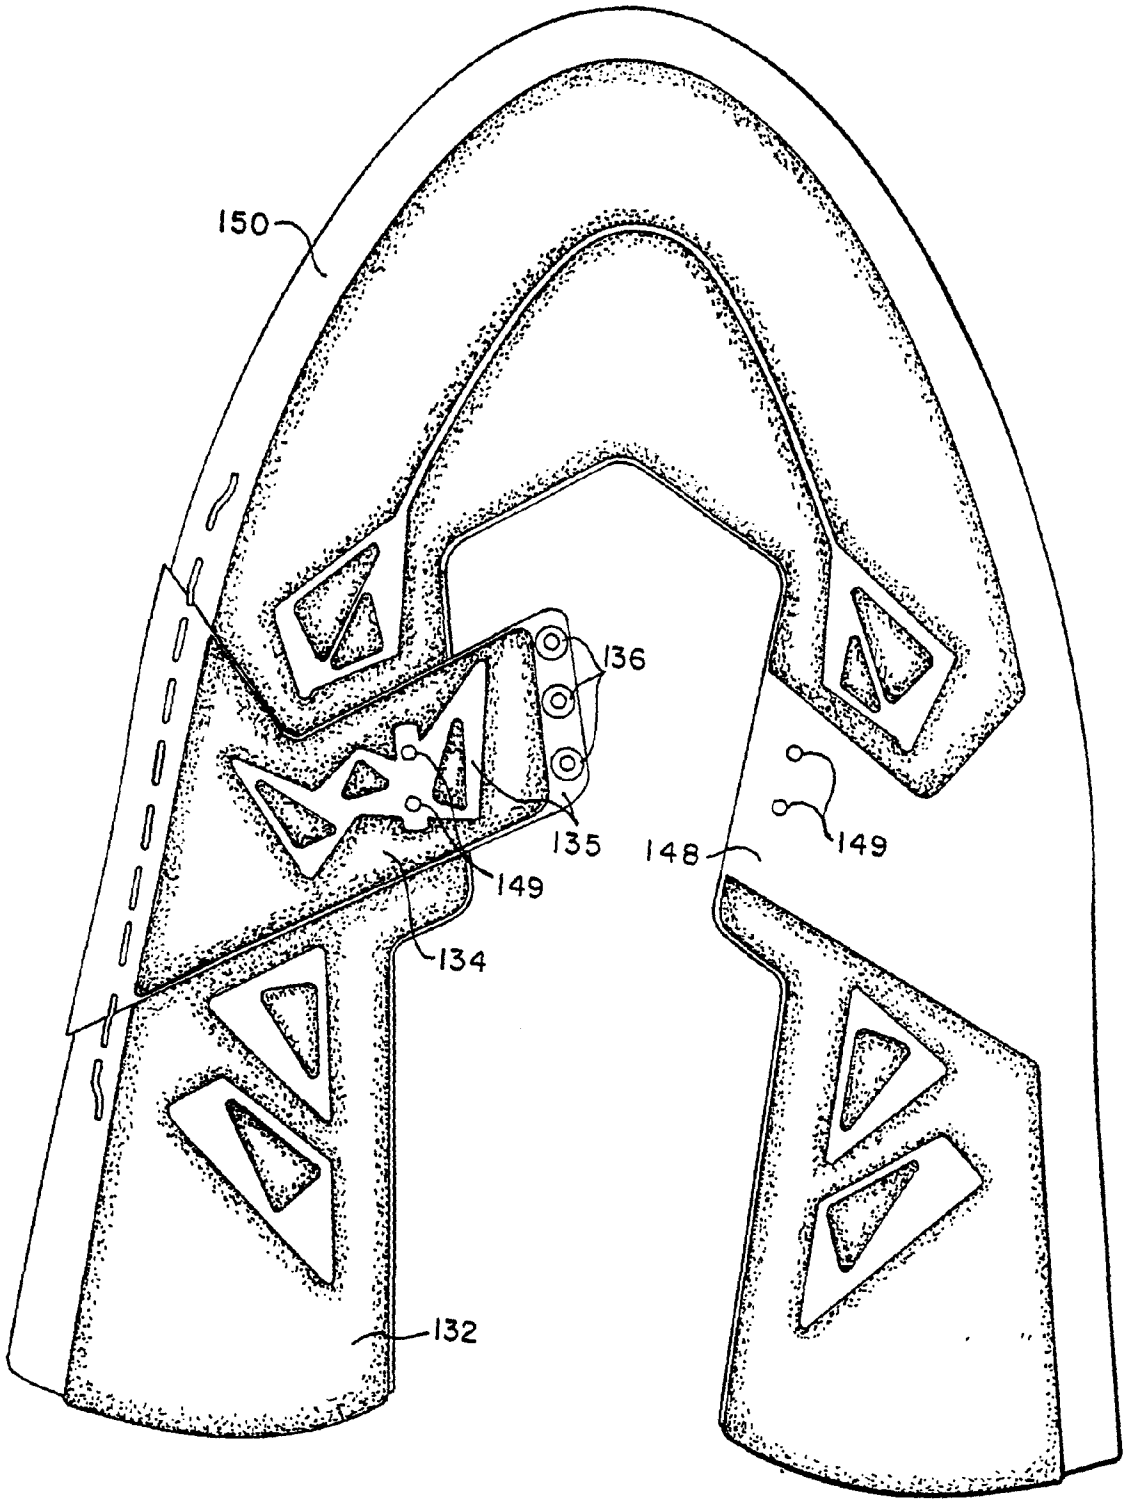


FIG.16

Petitioner adidas AG - Exhibit 1010, Page 42
Skechers EX1013, p. 335
Skechers v Nike

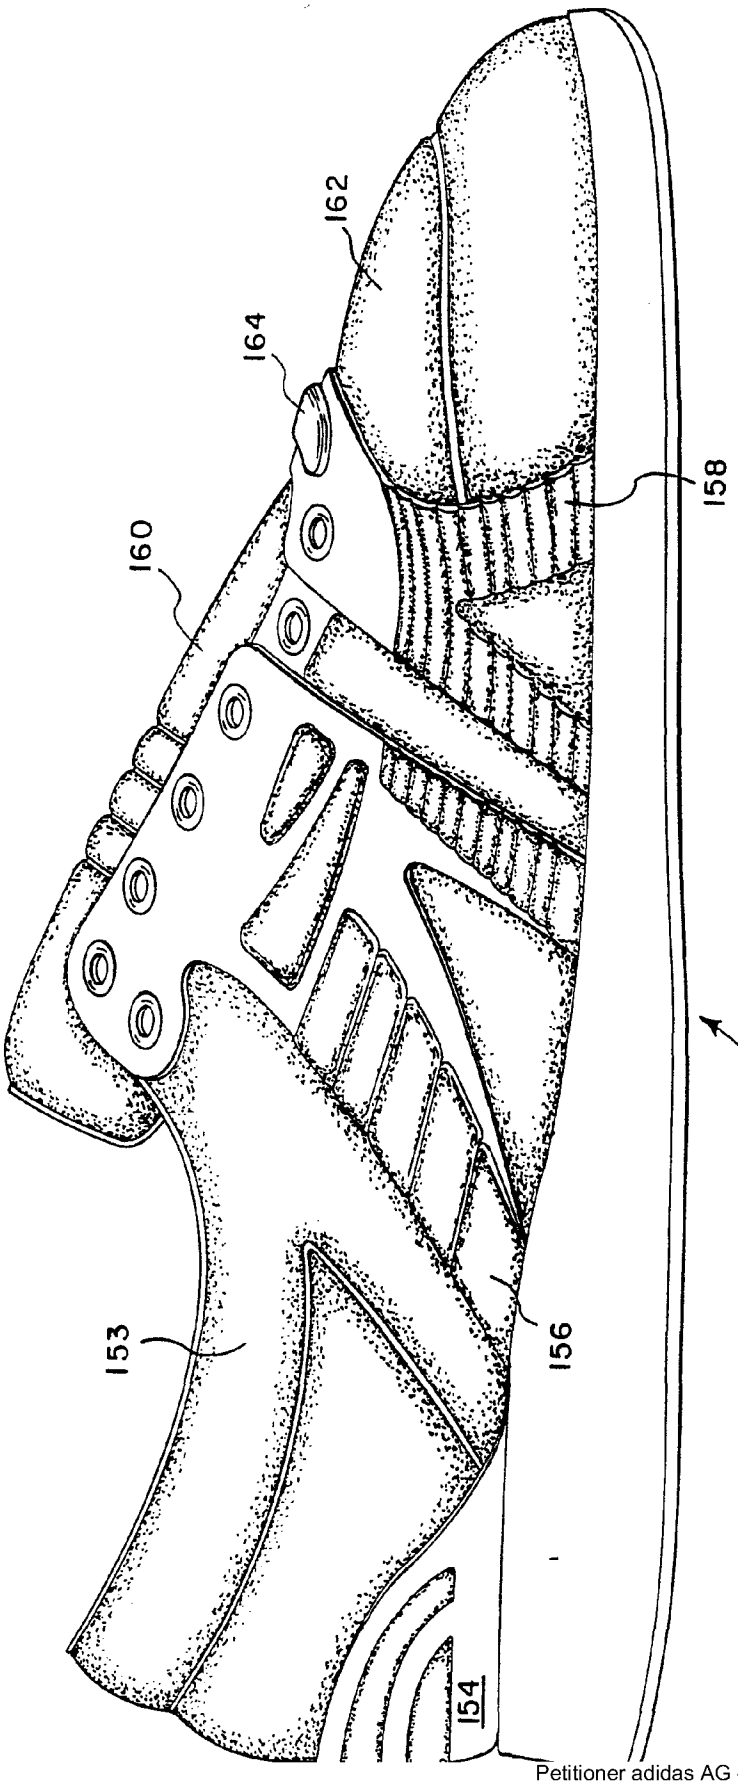


FIG. 17

Petitioner adidas AG - Exhibit 1010 - Page 43
Skechers EX1013 p. 336
Skechers v Nike

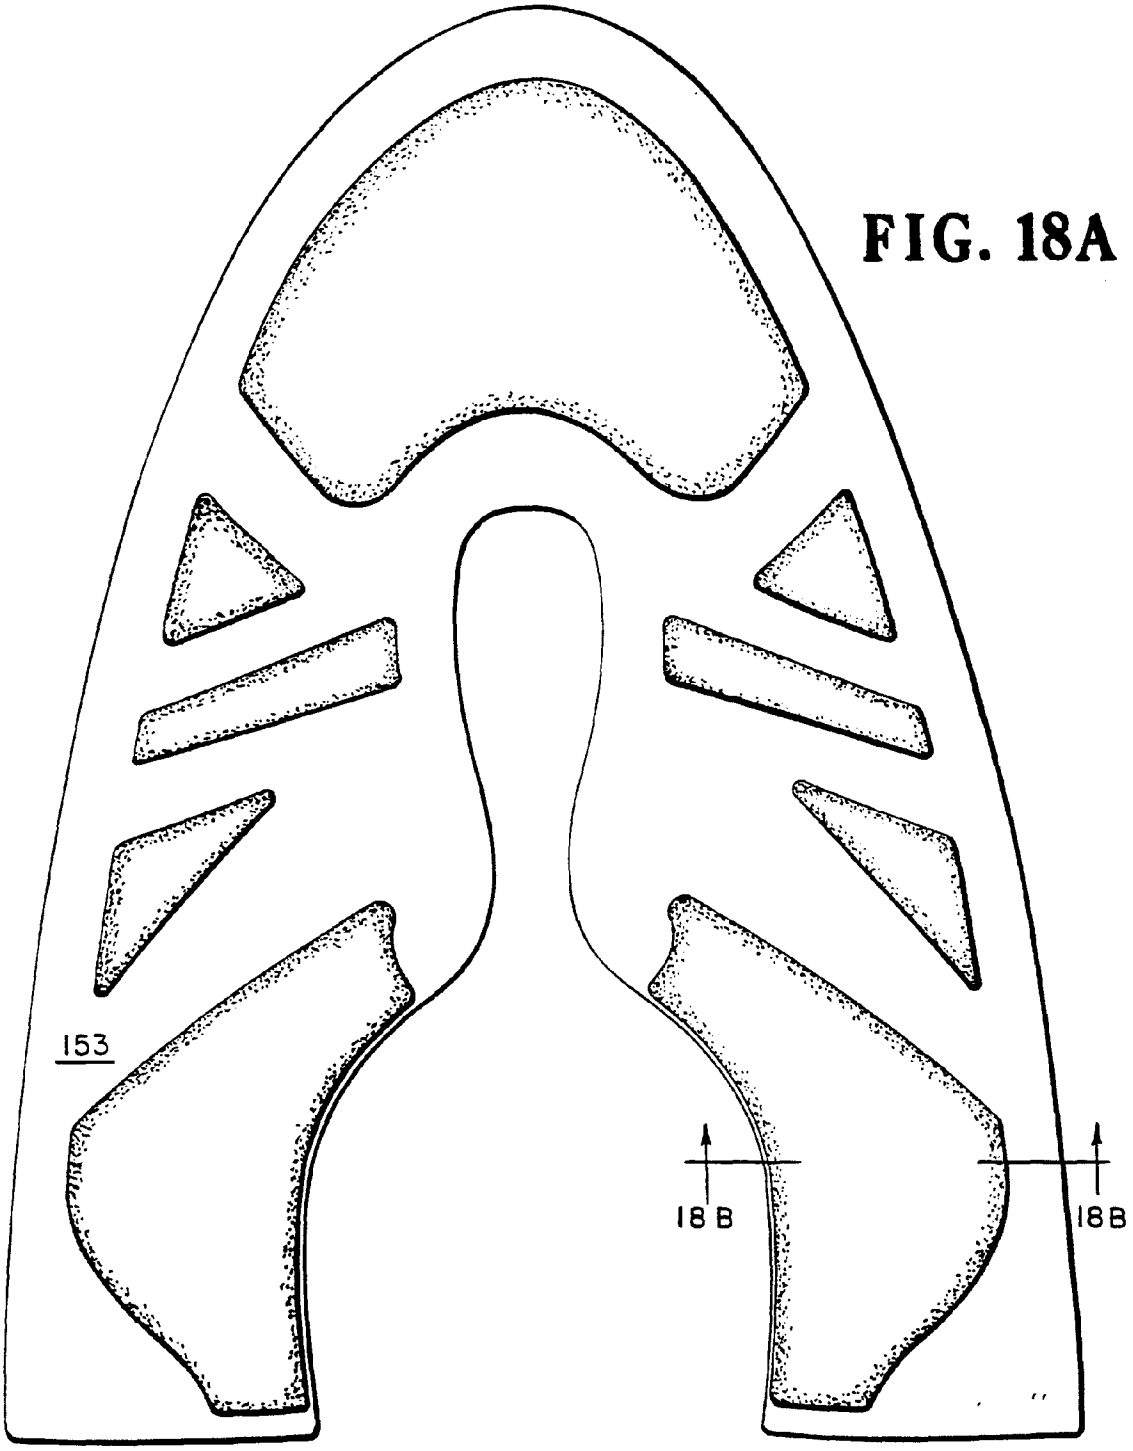


FIG. 18A



FIG. 18B

Petitioner adidas AG - Exhibit 1010 - Page 44
Skechers Ex1013 p. 337
Skechers v Nike

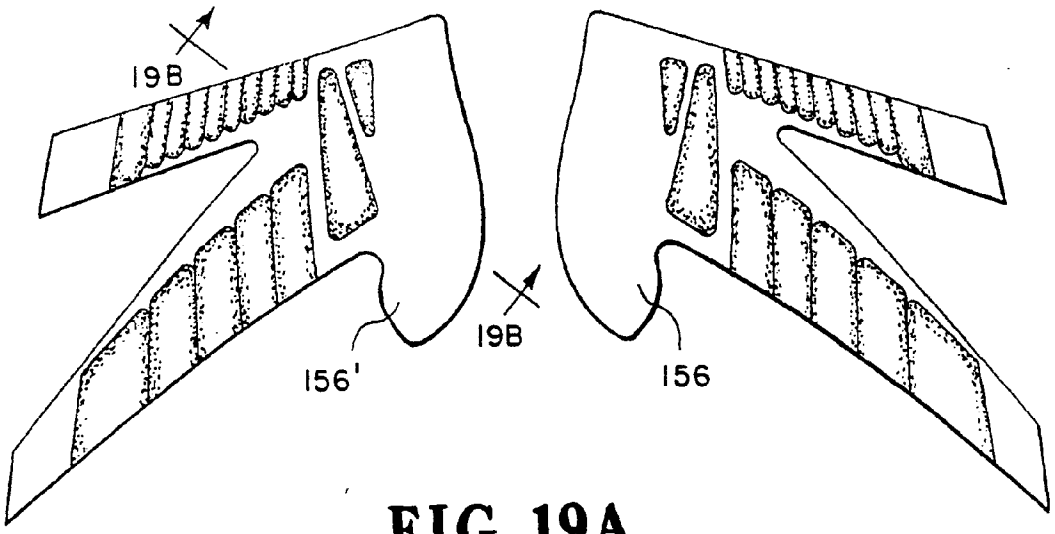


FIG. 19A




FIG.19B

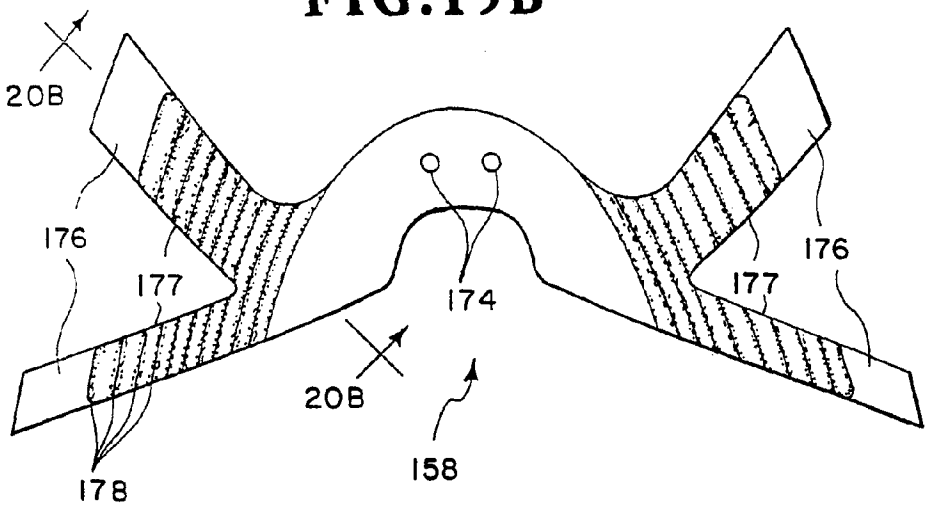


FIG.20A



FIG. 20B

Petitioner adidas AG - Exhibit 1010 - Page 45
Skechers Ex1013 p. 338
Skechers v Nike

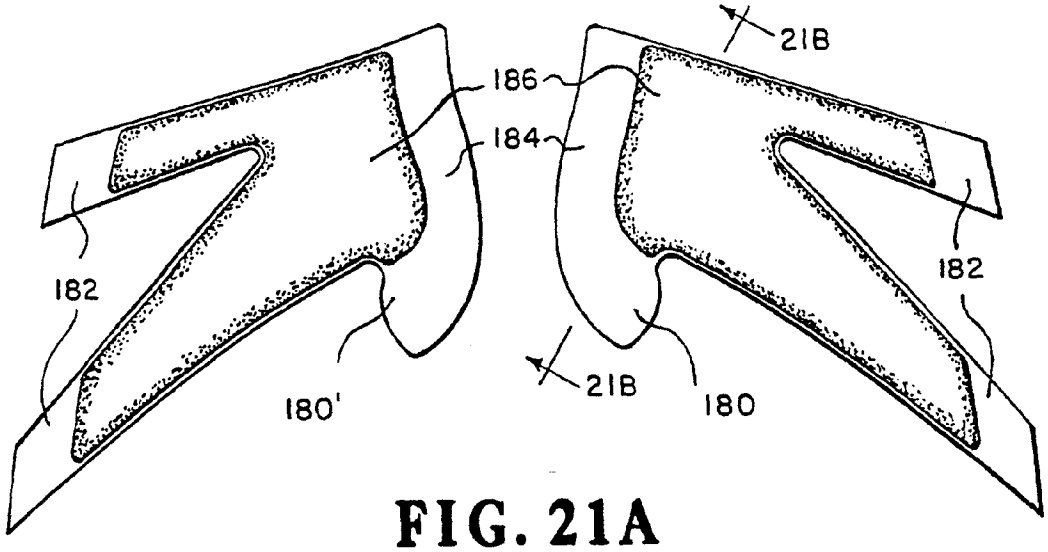


FIG. 21A



FIG. 21B

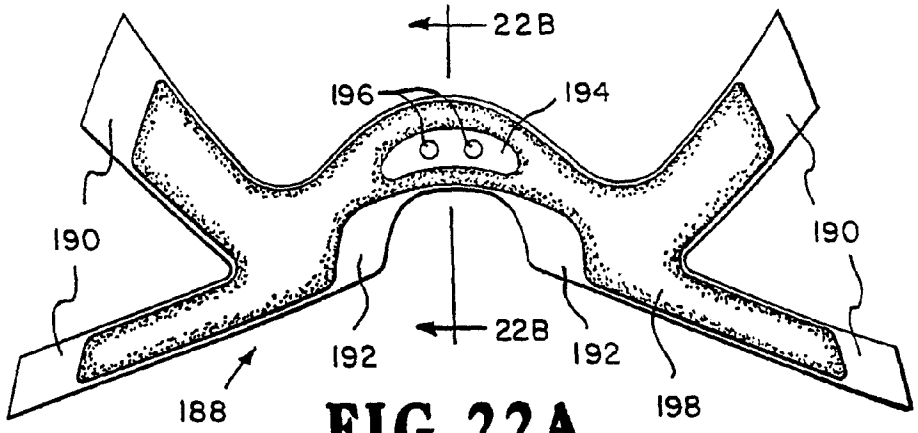


FIG. 22A




FIG. 22B

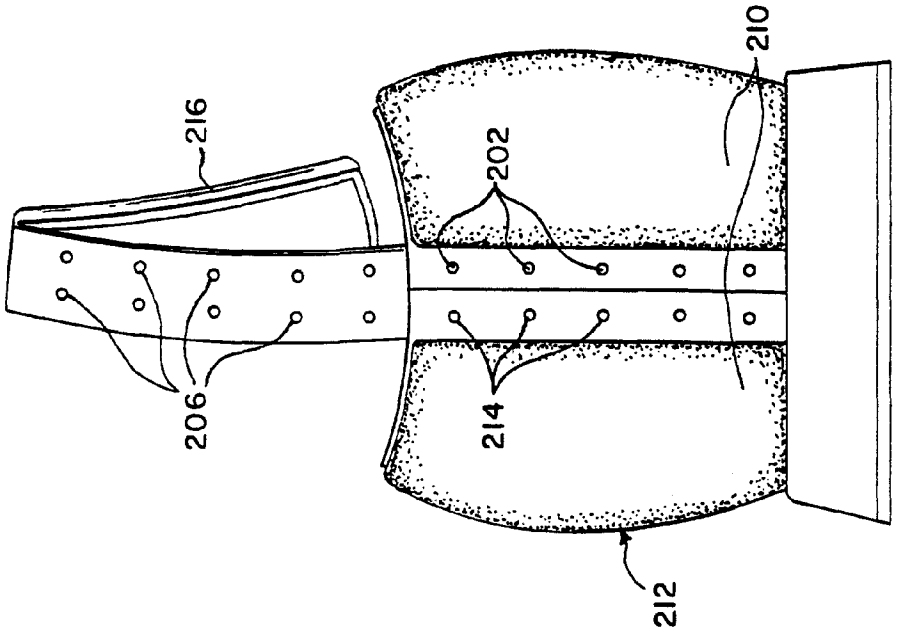


FIG. 23C

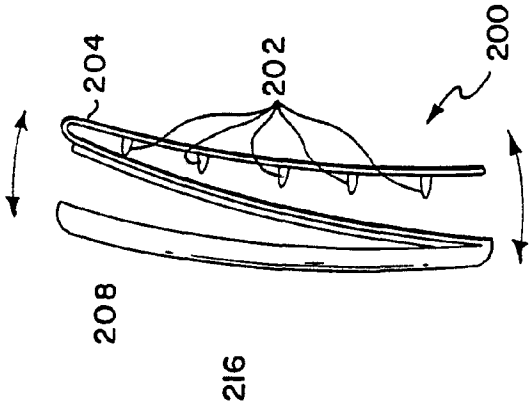


FIG. 23B

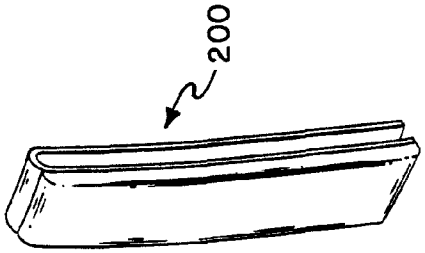


FIG. 23A

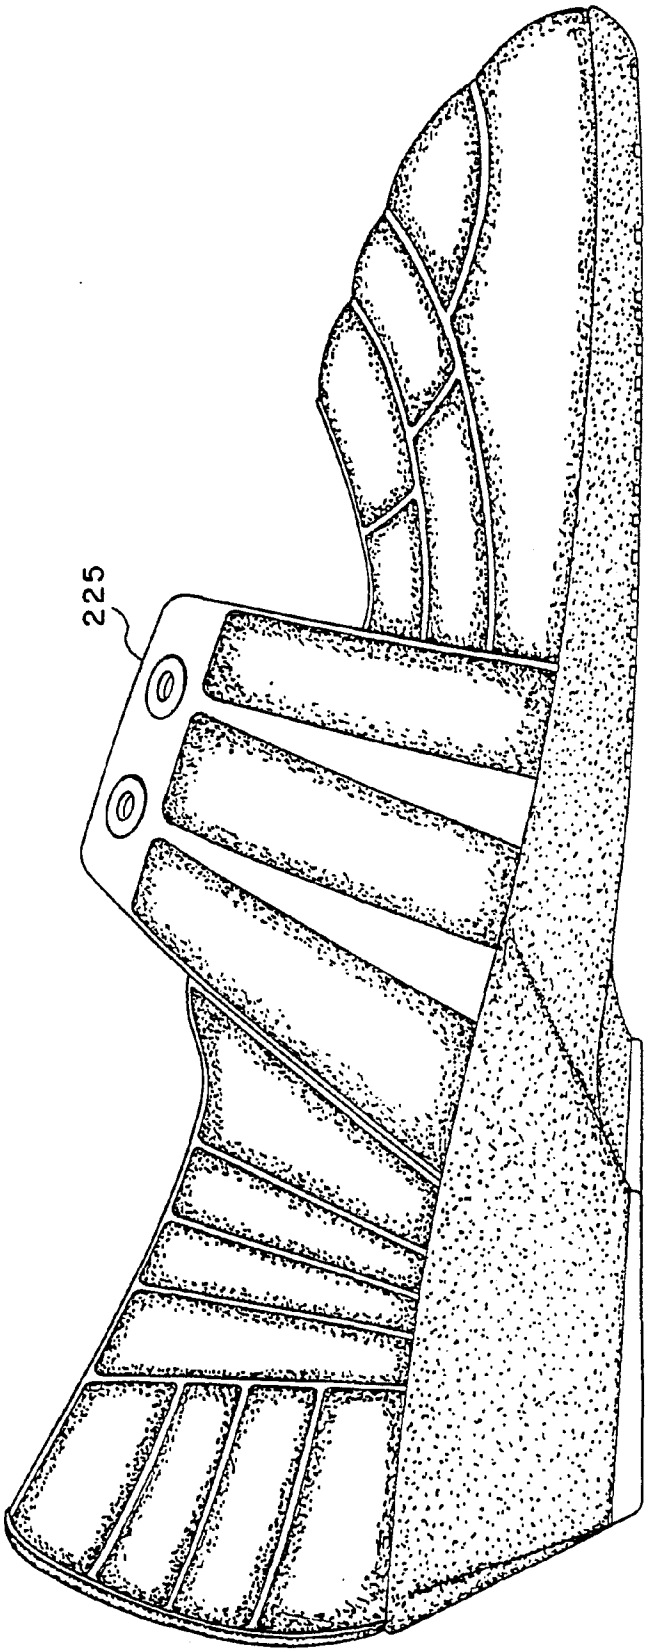


FIG. 24

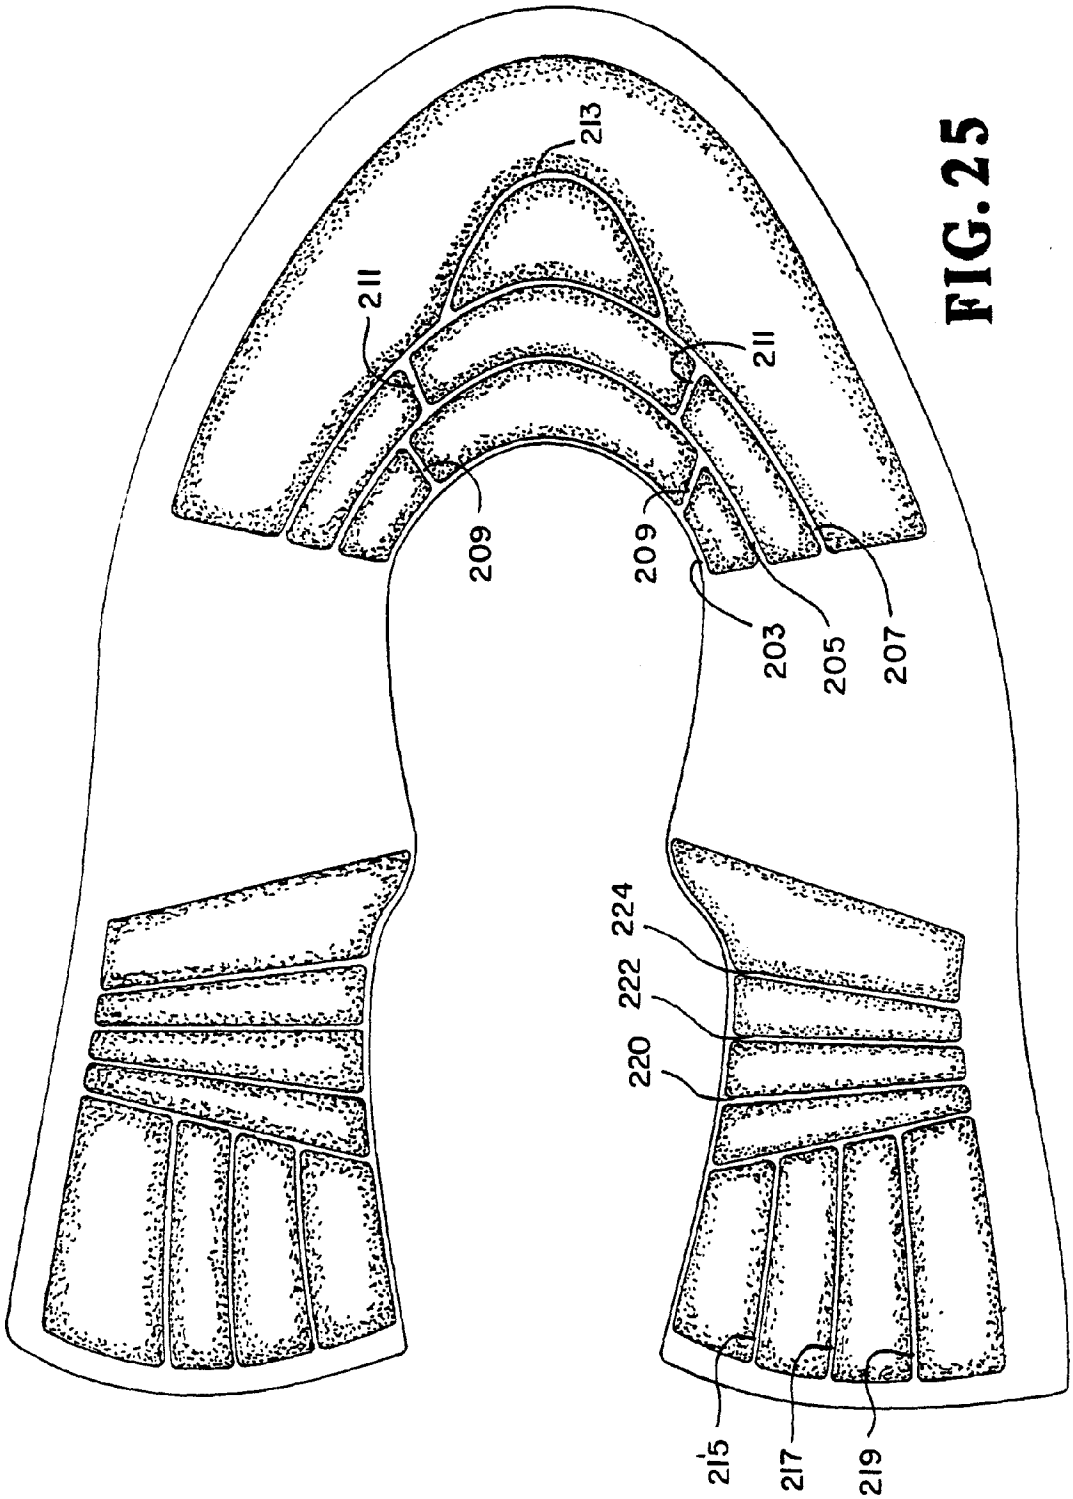


FIG. 25

Petitioner adidas AG - Exhibit 1010 - Page 49
Skechers EX1013 p. 342
Skechers v Nike

SUBSTITUTE SHEET

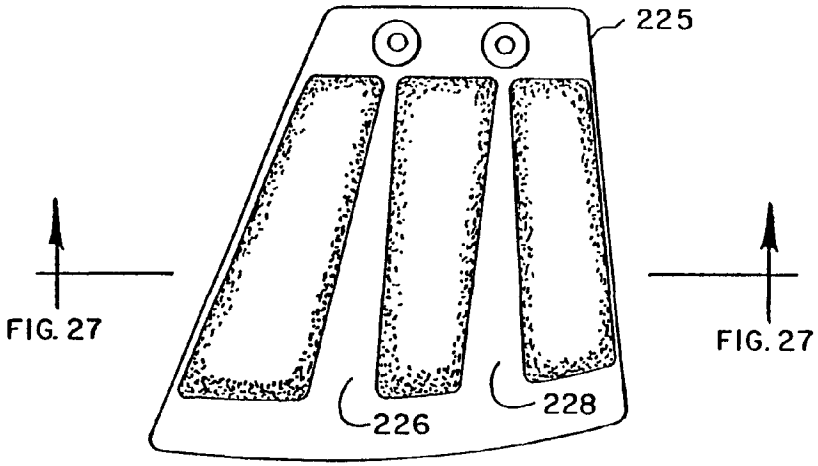


FIG. 26

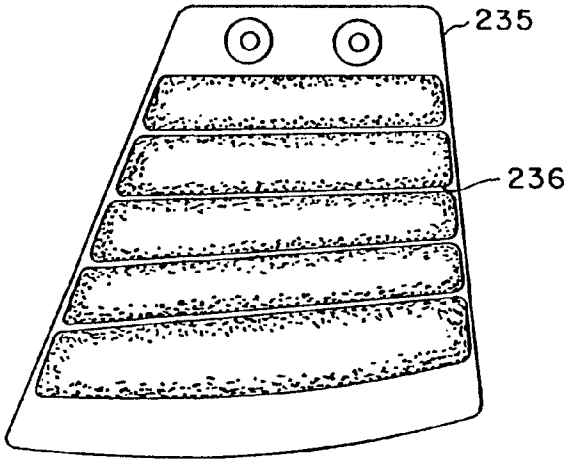


FIG. 28

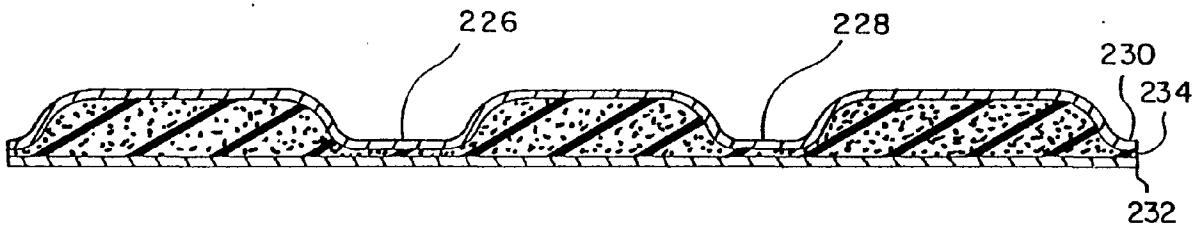


FIG. 27

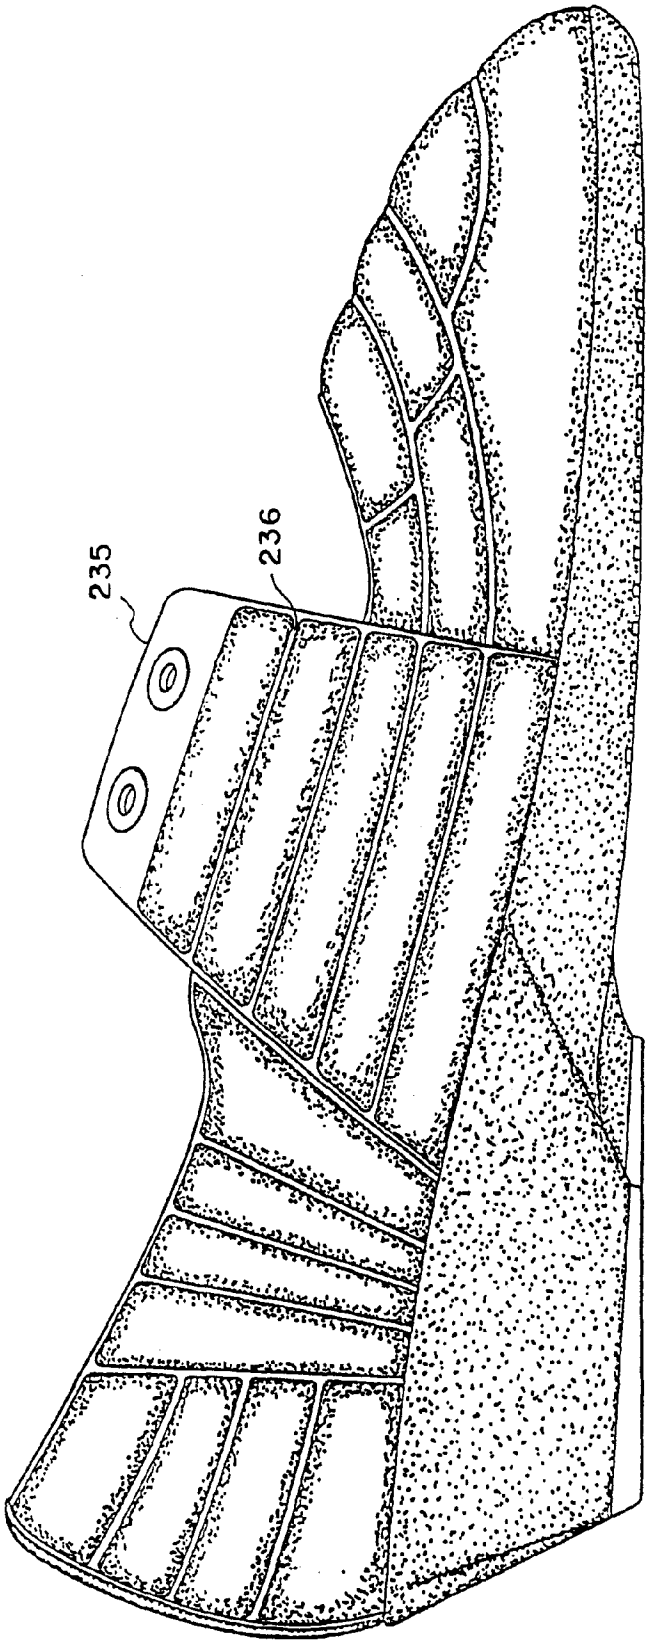


FIG. 29

INTERNATIONAL SEARCH REPORT

International Application No PCT/US 89/04370

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) [6]

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC5: A 43 D 8/24

II. FIELDS SEARCHED

Minimum Documentation Searched [7]

Classification System	Classification Symbols
IPC5	A 43 D; A 43 B

Documentation Searched other than Minimum Documentation to the Extent that such Documents are included in the Fields Searched [8]

III. DOCUMENTS CONSIDERED TO BE RELEVANT [9]

Category [10]	Citation of Document, [11] with indication, where appropriate, of the relevant passages [12]	Relevant to Claim No. [13]
A	US, A, 2622052 (J.D. CHANDLER) 16 December 1952, see the whole document	1-43
A	US, A, 3130505 (I.I. MARKEVITCH) 28 April 1964, see the whole document	1-43
A	US, A, 3583081 (HIDEO HAYASHI) 8 June 1971, see the whole document	1-43
A	DE, B2, 2235819 (FRITZ WAGNER, MASCHINENFABRIK GMBH & CO KG) 14 February 1974, see the whole document	1-43

* Special categories of cited documents: [14]

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report
17th January 1990	12. 02. 90
International Searching Authority	**Signature of Authorized Officer**
EUROPEAN PATENT OFFICE	C.D. v.d. Vliet

Form PCT/ISA/210 (second sheet) (January 1985)

ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/US 89/04370

SA 31867

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on 08/11/89
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 2622052	16/12/52	NONE	
US-A- 3130505	28/04/64	NONE	
US-A- 3583081	08/06/71	FR-A- 1578531	14/08/69
		GB-A- 1223285	24/02/71
		DE-A- 1785183	04/11/71
		DE-U- 6753371	24/04/69
		DE-U- 6753380	24/04/69
DE-B2- 2235819	14/02/74	DE-A- 2265494	02/12/82

EPO FORM P0470

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

Erteilt auf Grund des Ersten Überleitungsgesetzes vom 8. Juli 1949
(WiGBl. S. 175)

BUNDESREPUBLIK DEUTSCHLAND

AUSGEGEBEN AM
19. MÄRZ 1953

DEUTSCHES PATENTAMT

PATENTSCHRIFT

Nr. 870 963
KLASSE 71a GRUPPE 17 11
H 7841 VII/71a

Georg Hofer, Grassau (Obb.)
ist als Erfinder genannt worden

Georg Hofer, Grassau (Obb.)

Lasche für Stiefel, insbesondere für Skistiefel

Patentiert im Gebiet der Bundesrepublik Deutschland vom 13. März 1951 an
Patentanmeldung bekanntgemacht am 24. Juli 1952
Patenterteilung bekanntgemacht am 5. Februar 1953

Skechers EX1013-p. 347
Skechers v Nike

Die Erfindung bezieht sich auf Laschen von Schuhen, die der Feuchtigkeit ausgesetzt werden, insbesondere Schuhe für den Wintersport, wie Skistiefel.

Bei solchen Schuhen ist das Oberleder gewöhnlich viel fester und wasserundurchlässiger als das meist dünne Leder der Schuhlaschen. Während das Oberleder der Schuhe der Feuchtigkeit ziemlich lange standhält, ohne daß sie durchzudringen vermag, schlägt die Feuchtigkeit durch die dünne Lasche viel schneller hindurch und erzeugt nasse Füße mit allen bekannten Folgeerscheinungen, zumal der Schnee sich leicht in die Lücken an den Schuhlaschen festsetzt und dort durch die Körperwärme zum Schmelzen kommt. Besonders ist dies der Fall, wenn eine Schuhlasche Polstereinlagen aus weichen Stoffen, wie z. B. Schwammgummi, hat, um den Druck der Verschnürung vom Fuß fernzuhalten. In diesem Fall saugt sich der Schwammgummi voll Wasser, näßt nach innen durch und ist nur sehr schwer trocken zu bekommen, weil das von ihm aufgesogene Wasser nur ganz allmählich durch das Leder der Lasche hindurch verdunsten kann.

Die Erfindung besteht nun darin, die weiche Polstereinlage auswechselbar zu machen.

Fig. 1 zeigt schematisch den Erfindungsgegenstand in der Draufsicht,

Fig. 2 im Schnitt *A-B*.

Die als Tasche 1 ausgebildete Lasche wird nicht, wie bisher, allseitig zugenäht, sondern sie bleibt an einer Seite, zweckmäßig an der Oberseite 2, offen. Das Polster 3, z. B. der Schwammgummi, wird in die Laschentasche 1 eingelegt und kann, wenn es feucht ist, herausgenommen und gesondert getrocknet werden.

Man kann den Vorderteil 4 oder den Rückteil 5 der Lasche noch über die für den Gebrauch erforderliche Länge hinaus, z. B. an der Oberseite der Lasche an der Stelle 6, verlängern und in die Tasche hinein um die Oberkante des Polsters herumklappen, damit die Einlage nicht herausrutscht, wie es in der Abbildung gestrichelt gezeichnet ist.

Wenn die Lasche nicht in Form einer Tasche ausgebildet ist, kann man das Polster auch an der Rückseite der Lasche an einigen Punkten abnehmbar befestigen, z. B. mit einer Verschnürung, mit kleinen Druckknöpfen od. dgl.

Die Beschreibung und die Abbildungen zeigen nur eine Ausführungsform der erfindungsgemäßen taschenförmigen Lasche, ohne daß die Erfindung jedoch auf diese besondere Ausführungsform beschränkt sein soll.

Patentansprüche:

1. Lasche für Stiefel, insbesondere für Skistiefel, die mit Polster versehen ist, dadurch gekennzeichnet, daß Mittel vorgesehen sind, um das Polster leicht auswechselbar mit der Lasche zu verbinden.

2. Lasche nach Anspruch 1, dadurch gekennzeichnet, daß sie als einseitig, insbesondere an ihrer Oberseite offene Tasche ausgebildet ist, in die das Poster eingelegt werden kann.

3. Lasche nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Fläche der Lasche derart vergrößert ist, daß sie um einen Teil des Polsters herumgelegt werden kann.

4. Lasche nach Anspruch 1, dadurch gekennzeichnet, daß das Polster an der Rückseite der Lasche z. B. mit einer Verschnürung oder mit kleinen Druckknöpfen befestigt ist.

Hierzu 1 Blatt Zeichnungen

5785 3.53

Skechers EX1013-p. 348
Skechers v Nike

Zu der Patentschrift 870 963
Kl. 71 a Gr. 17₁₁

Fig. 2


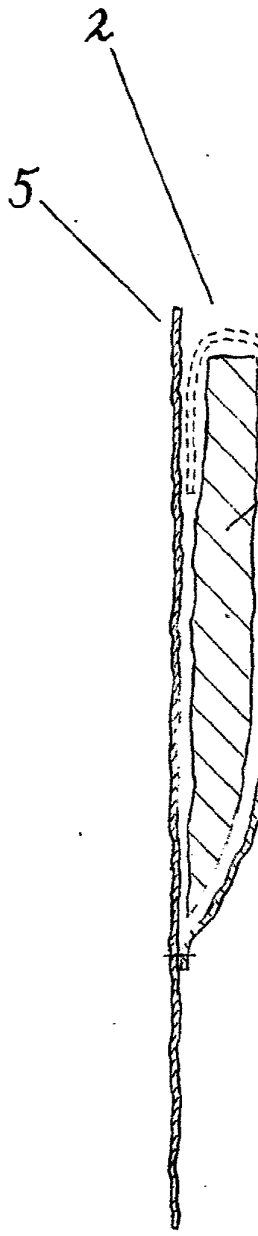


Fig. 1

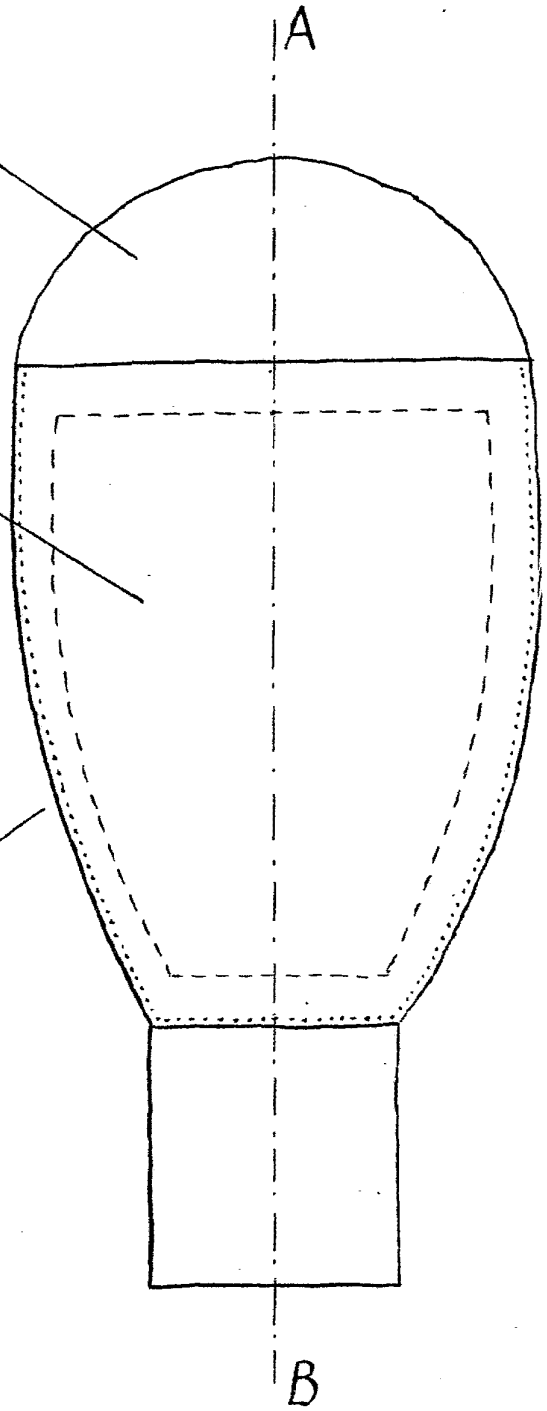

Espacenet

Bibliographic data: EP0279950 (A2) — 1988-08-31

Upholstered belt.

No documents available for this priority number.

Inventor(s): LEUTERT RUDOLF ± (LEUTERT, RUDOLF)

Applicant(s): AROVA MAMMUT AG [CH] ± (AROVA-MAMMUT AG)

Classification: - international: ***A45C13/30; D03D15/00; D03D3/02;***
(IPC1-7): A45C13/30; D03D15/00; D03D3/02
- cooperative: **A45C13/30**; **D03D15/00**; **D03D3/02**; D10B2201/02; D10B2321/022; D10B2321/041; D10B2331/02; D10B2331/04


Application number: EP19870119268 19871228

Priority number(s): DE19873705908 19870224

Also published as: EP0279950 (A3) EP0279950 (B1) DE3705908 (A1)

Abstract of EP0279950 (A2)

An upholstered belt whereby a human body can carry a weight, which consists of a textile fabric tube (1) as weight-bearing component and a padding material on the inside of the fabric tube, is simpler to manufacture and gives improved wear comfort when the padding material consists of crimped yarn (10) arranged in the direction (20) of the warp threads of the fabric tube (1) in the longitudinal direction and on the inside thereof.

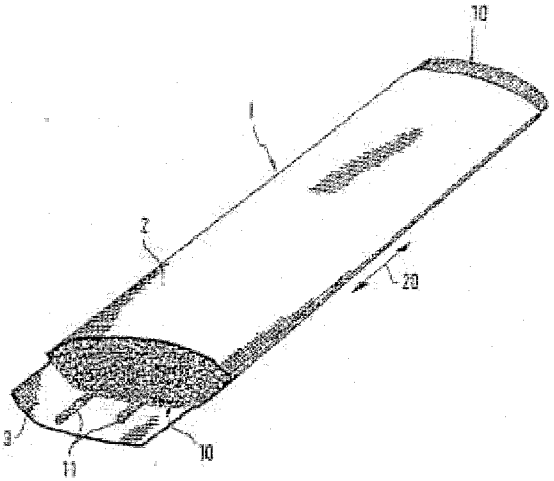

Skechers EX1013-p. 350
Skechers v. Vibe

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Veröffentlichungsnummer: **0 279 950**
A2

(12) EUROPÄISCHE PATENTANMELDUNG

(21) Anmeldenummer: **87119268.8**

(22) Anmeldetag: **28.12.87**

(51) Int. Cl.⁴: **D03D 15/00** , D03D 3/02 , A45C 13/30

(30) Priorität: **24.02.87 DE 3705908**

(43) Veröffentlichungstag der Anmeldung: **31.08.88 Patentblatt 88/35**

(84) Benannte Vertragsstaaten: **AT CH DE FR GB IT LI**


(71) Anmelder: **AROVA-MAMMUT AG**
Unterer Haldenweg 12
CH-5600 Lenzburg(CH)

(72) Erfinder: **Leutert, Rudolf**
Hauptstrasse 196
CH-9126 Neckar SG(CH)

(74) Vertreter: **Uri, Peter Alexander, Dipl.-Ing. et al**
Patentanwälte Strohschänk, Uri & Strasser
Innere Wiener Strasse 8
D-8000 München 80(DE)

(54) Gepolsterter Gurt.

(57) Bei einem gepolsterten Gurt, insbesondere zur Lastaufnahme am menschlichen Körper, bestehend aus einem textilen Gewebeschlauch (1) zur Lastaufnahme und einem im Inneren des Gewebeschlauchs aufgenommenen Polstermaterial, ist zur Vereinfachung der Herstellung und zur Verbesserung des Tragekomforts vorgesehen, daß das Polstermaterial aus in Richtung (20) der Kettfäden des Gewebeschlauchs (1) in Längsrichtung in dessen Innerem angeordnetem Kräuselgarn (10) besteht.

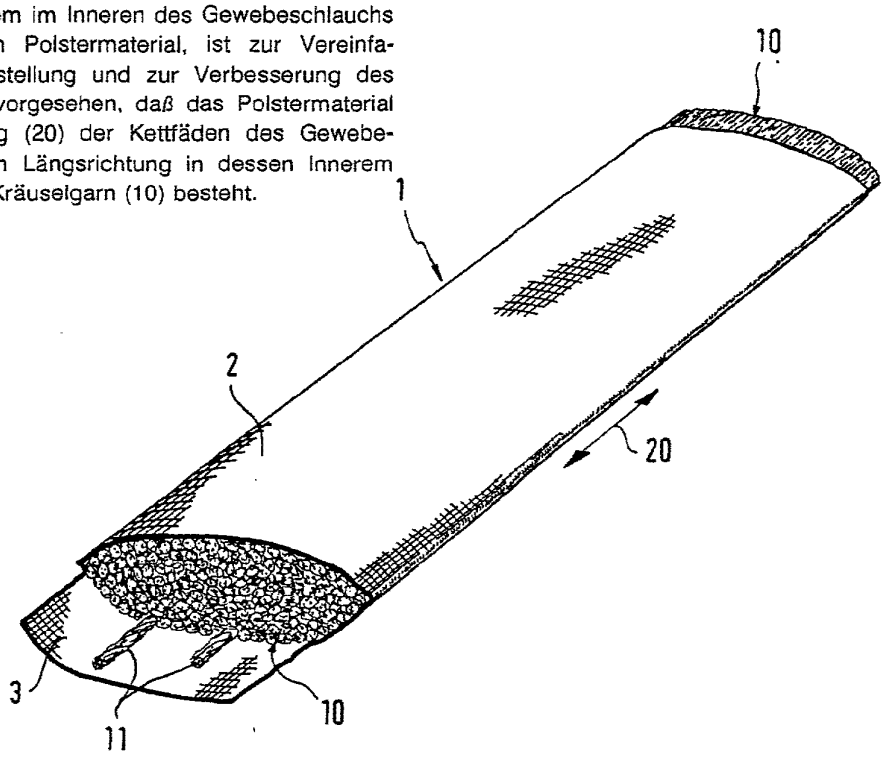

EP 0 279 950 A2

Gepolsterter Gurt

Die Erfindung betrifft einen gepolsterten Gurt, insbesondere zur Lastaufnahme am menschlichen Körper, bestehend aus einem textilen Gewebeschlauch zur Lastaufnahme und einem im Inneren des Gewebeschlauchs aufgenommenen Polstermaterial.

Derartige gepolsterte Gurte werden beispielsweise bei der Anfertigung von Klettergürteln für Bergsteiger oder von Tragegurten für Rucksäcke oder ähnliches eingesetzt. Die Gurte dienen dabei zur Übertragung einer Last auf den menschlichen Körper, wobei vor allem darauf zu achten ist, daß die Lasteinleitung in den menschlichen Körper ohne lokale Lastspitzen erfolgt. In besonderem Maße gilt dies bei Klettergürteln, um Verletzungen bei Seilstürzen zu verhindern. Aber auch bei Rucksack-Tragegurten ist eine flächige Lasteinleitung gefordert, um Druck-oder Scheuerstellen zu vermeiden und einen hohen Tragekomfort sicherzustellen. Eine weitere beispielsweise Verwendung derartiger gepolsterter Gurte findet sich bei der Anfertigung von Sattelgurten für Lasttiere, wie beispielsweise Pferde.

Herkömmliche gepolsterte Gurte dieser Art bestehen aus einem einstückig gewebten Schlauchgewebe, das zur Herstellung von Tragegurten für Rucksäcke oder von Klettergürteln in entsprechende Stücke geschnitten wird, in die ein Polstermaterial in Gestalt von im Querschnitt rechteckigen Schaumstoffstreifen eingezogen wird. Dieses Einziehen wird in der Praxis entweder von Hand oder aber unter Verwendung maschineller Hilfsvorrichtungen durchgeführt. Nach dem Einsetzen der Schaumstoff-Stücke werden die Enden der Stücke aus Schlauchgewebe in der gewünschten Weise zu Tragegurten oder Klettergürteln vernäht. Unabhängig davon, ob das Einziehen des Füllmaterials von Hand oder mit maschineller Hilfe geschieht, ist daher die Herstellung arbeitsaufwendig und kostspielig.

In der Praxis ergeben sich überdies einige problematische Eigenschaften derartiger bekannter gepolsterter Gurte. Zum einen sind die Schaumstoffeinlagen im Querschnitt rechteckig. Da sie zur Entfaltung der gewünschten Polsterwirkung aus nicht allzu weichem Material bestehen dürfen, neigen die Kanten des rechteckigen Querschnitts trotz der Elastizität des Materials zur Herbeiführung von Scheuerstellen. Darüber hinaus zeigt es sich, daß die für den Einsatz in Frage kommenden Schaumstoffe wenig alterungsbeständig sind und im Dauergebrauch alsbald krümelig zerfallen. Insbesondere tritt diese unerwünschte Erscheinung durch den Einfluß des Hautschweißes der Benutzer auf, wobei zu berücksichtigen ist, daß bei den vorgesehenen Anwendungsfällen die Gurte häufig auf bloßer Haut oder auf nur dünner Kleidung und bei sportlicher Anstrengung mit entsprechender Transpiration getragen werden. Auch der Einfluß der Ultraviolettstrahlung der Sonne scheint diesen Alterungsprozeß zu beschleunigen.

Die der Erfindung zugrundeliegende Aufgabe besteht somit darin, einen gepolsterten Gurt der eingangs genannten Gattung zu schaffen, der bei einfacher kostengünstiger Herstellung einen erhöhten Tragekomfort gewährleistet.

Gemäß der Erfindung wird diese Aufgabe bei einem gepolsterten Gurt der eingangs genannten Gattung dadurch gelöst, daß das Polstermaterial aus in Richtung der Kettfäden des Gewebeschlauchs in Längsrichtung in dessen Innerem angeordnetem Kräuselgarn besteht.

Durch diese erfindungsgemäße Ausgestaltung wird erreicht, daß sich der Gurt in optimaler Weise an die anatomischen Gegebenheiten des menschlichen Körpers ohne Druckstellen anpaßt. Besonders vorteilhaft ist es dabei, daß die zu übertragende Last ausschließlich von dem äußeren im Verhältnis zum Füllmaterial dehnungsarmen Gewebeschlauch aufgenommen wird, so daß das Füllmaterial in Längsrichtung keinen Belastungen unterliegt, daher in Längsrichtung auch nicht gedehnt wird, so daß die einzelnen Stränge des Kräuselgarns nicht verstreckt werden und ihre voluminöse Bauschigkeit auch bei Belastung erhalten bleibt. Wegen der Kräuselung der ein zelnen Stränge des Füllmaterials verstreben sich diese in Querrichtung gegenseitig, so daß sie im Inneren des Gewebeschlauches nicht verrutschen können und der flächige Polsterungseffekt auch im Dauergebrauch erhalten bleibt.

Um jede Verstreckung des Kräuselgarns in Längsrichtung durch Kraftbelastung zu vermeiden, ist es bevorzugt, daß das das Polstermaterial darstellende Kräuselgarn ohne Verbindung mit dem Gewebeschlauch lose in dessen Innerem aufgenommen ist. Wegen der voluminösen Bauschigkeit und Kräuselung der einzelnen Garnstränge wird auch dabei eine Verschiebung und Zusammenballung in Querrichtung vermieden.

Bevorzugt ist es, daß das Kräuselgarn ein texturiertes Chemiefasergarn mit voluminöser Bauschigkeit ist wie ein texturiertes Polyester-Endlosgarn. Ein derartiges Material ist nicht nur hinsichtlich der Bauschigkeit sehr formstabil, sondern zeichnet sich auch durch Schweißfestigkeit und Alterungsbeständigkeit aus.

Bei einer bevorzugten Ausführungsform des erfindungsgemäßen Polstergurts ist vorgesehen, daß der Gewebeschlauch aus einer oberen Gewebelage

Skechers EX1013-p. 352
Skechers v Nike

und einer unteren Gewebelage unterschiedlicher Materialbeschaffenheit besteht.

Bevorzugt besteht die obere Gewebelage aus einem witterungsbeständigen Material hoher Reißfestigkeit und Bruchdehnung, wie einem Polyamidgarn. Diese obere Gewebelage ist dann in erster Linie für die Lastaufnahme verantwortlich. Sie wird im Gebrauch auf der körperfernen Seite angeordnet und gewährleistet zudem die erforderliche Witterungsbeständigkeit und Unempfindlichkeit gegen UV-Bestrahlung.

Die untere Gewebelage besteht vorzugsweise aus einem atmungsfähigen, hautfreundlichen Material, wie Polyester-Spinnfasergarn, Baumwoll-Polyester-Mischgarn, PVC-oder Polypropylen-Garn. Die Unterseite ist dabei zur Auflage auf dem menschlichen Körper vorgesehen. Die bevorzugten Materialien weisen Trageeigenschaften auf, die jenen aus Naturfasern, wie beispielsweise Baumwolle hinsichtlich Hautfreundlichkeit und Atmungsfähigkeit sehr nahekommen oder diese gar übertreffen.

Bei einem bevorzugten Verfahren zur Herstellung eines erfindungsgemäßen gepolsterten Gurtes ist vorgesehen, daß der Gewebeschlauch in einer Webmaschine, beispielsweise einem Bandwebstuhl, einstückig in einem Arbeitsgang gewebt wird und daß dabei als Polstermaterial eine Vielzahl von Garnsträngen des Kräuselgarns als Kettfäden zugeführt und ohne Verwebung mit den Schuß-und Kettfäden des Gewebeschlauchs in dessen Innenraum lose eingezogen wird.

Es wird dabei also in einem einzigen Arbeitsgang ein gepolsteter Gurt aus Gewebeschlauch und Polstermaterial hergestellt. Die Arbeitsgänge des mühsamen Einziehens von Stücken des Polstermaterials wie beim Stand der Technik entfallen. Der aus der Webmaschine erfindungsgemäß austretende Gurt kann zur Weiterverarbeitung und Konfektionierung beispielsweise zu Klettergürteln oder Tragegurten für Rucksäcke in Stücke geschnitten werden. Zum Vernähen der Enden dieser Stücke kann im Bedarfsfall auch entweder ein Teil des Füllmaterials herausgeschnitten oder einfach in das Innere des Gurtes zurückgeschoben werden, so daß die Enden in der gewünschten Weise ohne polsternde Zwischenlage vernäht werden können. Es ist somit kein nachträgliches Zuschneiden und Einziehen von zusätzlichen Elementen erforderlich.

Die Erfindung wird im folgenden beispielsweise unter Bezugnahme auf die Zeichnung näher erläutert; die einzige Figur der Zeichnung zeigt eine schematische Darstellung eines Stücks des gepolsterten Gurts in perspektivischer Ansicht mit einem unregelmäßig ausgeschnittenen Ende zur Darstellung von Einzelheiten.

Das gezeigte Ausführungsbeispiel des gepolsterten Gurts umfaßt einen im Querschnitt spitzovalen Gewebeschlauch aus einer oberen Gewebelage 2 und einer unteren Gewebelage 3, die aus unterschiedlichen Materialien bestehen können. Die obere Gewebelage 2 kann einfarbig oder mehrfach gemustert, beispielsweise mit farbigen Längsstreifen gewebt oder mit eingewebten oder aufgedruckten Symbolen versehen sein. Das Material der oberen Gewebelage 2 besteht beispielsweise aus einem witterungsbeständigen Polyamidgarn hoher Reißfestigkeit und Bruchdehnung.

Die untere Gewebelage 3, die zur Auflage auf dem Körper des Benutzers bestimmt ist, besteht beispielsweise aus einem Polyester-Spinnfasergarn, einem Baumwoll-Polyester-Mischgarn oder einem PVC-oder Polypropylen-Garn. Diese Materialien zeichnen sich durch hohe Atmungsfähigkeit und Hautfreundlichkeit aus und kommen in ihren Eigenschaften Naturfasern nahe, so daß sich ein hoher Tragekomfort gewährleisten läßt. Die obere Gewebelage 2 und die untere Gewebelage 3 werden bei der Herstellung des Gewebeschlauchs unter Verwendung der unterschiedlichen Materialien als Kett-und Schußfäden einstückig zusammengewebt.

Wie dargestellt, ist der Innenraum des Gewebeschlauchs 1 mit Kräuselgarn 10 gefüllt, dessen einzelne Garnstränge 11 sich in Richtung 20 der Kettfäden des Gewebeschlauchs in dessen Längsrichtung erstrecken. Die einzelnen Garnstränge 11 des Kräuselgarns sind weder miteinander noch mit den Kett-oder Schußfäden des Gewebeschlauchs verbunden. Sie sind lose im Innenraum des Gewebeschlauchs 1 aufgenommen, können sich jedoch wegen ihrer voluminösen Bauschigkeit gegeneinander nicht verschieben, so daß die Polstergestalt des Gurtes im Gebrauch aufrechterhalten bleibt.

Das Kräuselgarn 10 ist ein texturiertes Chemiefasergarn mit voluminöser Bauschigkeit, beispielsweise ein texturiertes Polyester-Enlosgarn.

Die Herstellung des gepolsterten Gurtes erfolgt auf einem Bandwebstuhl bzw. einer Gurt-Webmaschine. Dabei werden in die Webmaschine als Kettfäden gleichzeitig die Garne für die obere Gewebelage 2, die untere Gewebelage 3 und das Kräuselgarn 10 zugeführt. Während des Webvorgangs werden die Kettfäden der oberen und unteren Gewebelagen 2, 3 mit ihren jeweiligen Schußfäden zu dem einstückigen Gewebeschlauch verwebt, während die Garnstränge 11 des Kräuselgarns 10 ohne Verwebung mit dem Gewebeschlauch 1 in dessen Innenraum lose eingezogen werden. Die gesamte Herstellung erfolgt also in kostengünstiger Weise in einem einzigen Arbeitsgang auf einer einzigen Maschine.

Zur Konfektionierung des Gurtes, d.h. zur Herstellung von beispielsweise Tragegurten für Rucksäcke oder Klettergürtel, werden entsprechende Stücke abgeschnitten. Je nach Bedarf können entweder aus den Enden dieser Stücke

Skechers EX1013-p. 353
Skechers v Nike

Teile des Kräuselgarns herausgeschnitten oder das Kräuselgarn an diesen Enden in das Innere des Gewebeschlauches zurückgeschoben werden, so daß diese Enden ohne Zwischenlage von Polstermaterial mit den entsprechenden Enden anderer Stücke zur Bildung der gewünschten Artikel vernäht werden können.

Ansprüche

1. Gepolsterter Gurt, insbesondere zur Lastaufnahme am menschlichen Körper, bestehend aus einem textilen Gewebeschlauch zur Lastaufnahme und einem im Inneren des Gewebeschlauchs aufgenommenen Polstermaterial, dadurch **gekennzeichnet,** daß das Polstermaterial aus in Richtung (20) der Kettfäden des Gewebeschlauchs (1) in Längsrichtung in dessen Innerem angeordnetem Kräuselgarn (10) besteht.

2. Gepolsterter Gurt nach Anspruch 1, dadurch **gekennzeichnet,** daß das das Polstermaterial darstellende Kräuselgarn (10) ohne Verbindung mit dem Gewebeschlauch (1) lose in dessen Innerem aufgenommen ist.

3. Gepolsterter Gurt nach Anspruch 1 oder 2, dadurch **gekennzeichnet,** daß das Kräuselgarn (10) ein texturiertes Chemiefasergarn mit voluminöser Bauschigkeit ist, wie ein texturiertes Polyester-Endlosgarn.


4. Gepolsterter Gurt nach einem der Ansprüche 1 bis 3, dadurch **gekennzeichnet,** daß der Gewebeschlauch (1) aus einer oberen Gewebelage (2) und einer unteren Gewebelage (3) unterschiedlicher Materialbeschaffenheit besteht.

5. Gepolsterter Gurt nach Anspruch 4, dadurch **gekennzeichnet,** daß die obere Gewebelage (2) aus einem witterungsbeständigen Material hoher Reißfestigkeit und Bruchdehnung besteht, wie einem Polyamidgarn.

6. Gepolsterter Gurt nach Anspruch 4 oder 5, dadurch **gekennzeichnet,** daß die untere Gewebelage (3) aus einem atmungsfähigen, hautfreundlichen Material besteht, wie Polyester-Spinnfasergarn, Baumwoll-Polyester-Mischgarn, PVC-oder Polypropylen-Garn.

7. Verfahren zur Herstellung eines gepolsterten Gurtes nach einem der vorhergehenden Ansprüche, dadurch **gekennzeichnet,** daß der Gewebeschlauch (1) in einer Webmaschine einstückig in einem Arbeitsgang gewebt wird und daß dabei als Polstermaterial eine Vielzahl von Garnsträngen (11) des Kräuselgarns (10) als Kettfäden zugeführt und ohne Verwebung mit den Schuß-und Kettfäden des Gewebeschlauchs (1) in dessen Innenraum lose eingezogen wird.

Skechers EX1013-p. 354
Skechers v Nike

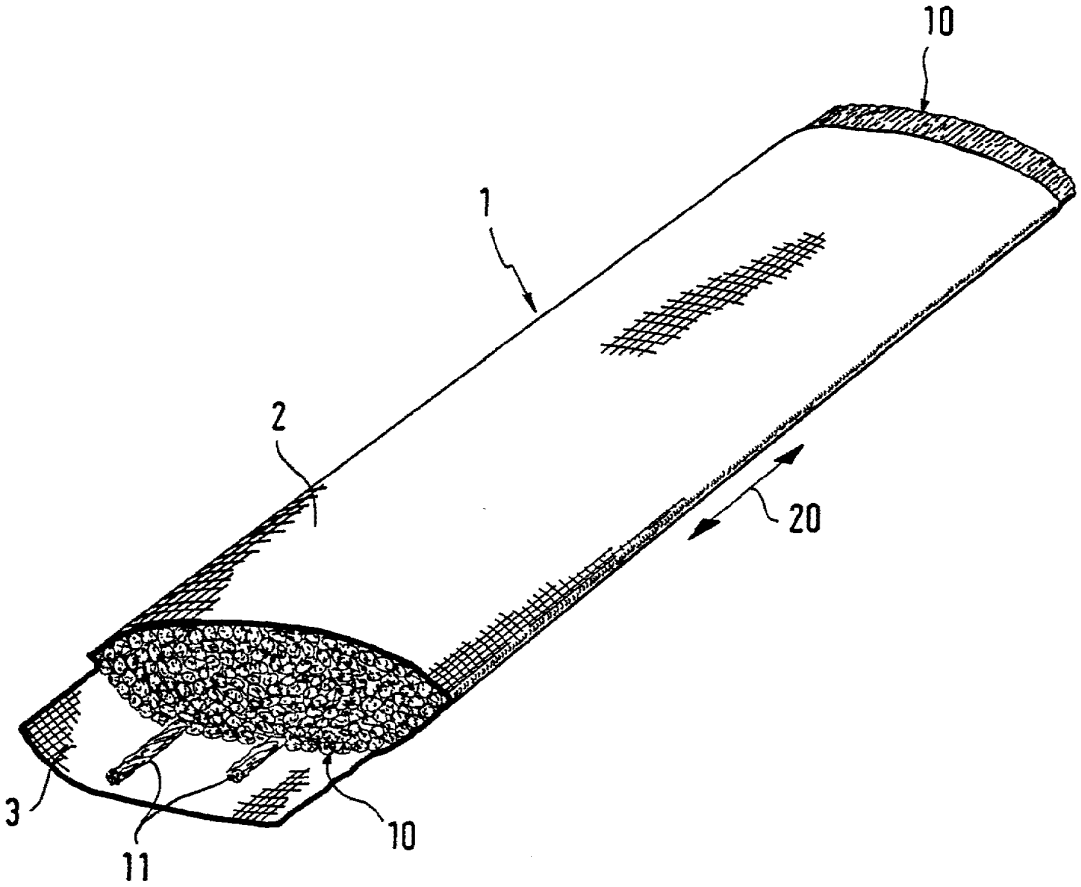
10
1
2
20
3
11
10

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 898 002 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
24.02.1999 Bulletin 1999/08

(51) Int Cl.[6]: **D04B 15/56**

(21) Application number: **98306719.0**

(22) Date of filing: **21.08.1998**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **21.08.1997 JP 225427/97**

(71) Applicant: **SHIMA SEIKI MANUFACTURING, LTD.**
Wakayama (JP)


(72) Inventor: **Shima, Masahiro**
Wakayama (JP)

(74) Representative: **Jackson, Robert Patrick**
Frank B. Dehn & Co.,
European Patent Attorneys,
179 Queen Victoria Street
London EC4V 4EL (GB)

(54) A flat knitting machine having a yarn feeding system

(57) Plural carrier rails (16) are arranged radially relative to a trick gap, and yarn carriers (2) are made to run on the rails. In the yarn carrier, a feeder rod (24) is mounted on a yarn rod, guide so that the rod can slide up and down. The feeder rod is pushed up by a spring coil (30), and the feeder rod is pushed down by a catching member (14) toward the gap.

FIG. 2

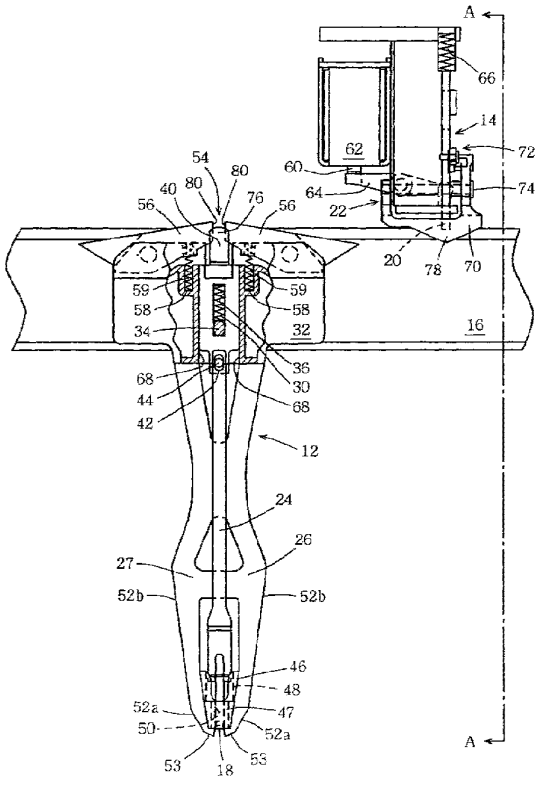

EP 0 898 002 A2

Description

[0001] The present invention relates to a yarn feeding system for a flat knitting machine that feeds yarn to needles provided on needle beds.

[0002] When multiple color yarns or yarns of various kinds are used in knitting, a carrier rail is provided above needle beds along the longitudinal direction thereof, and multiple yarn carriers are supported on this rail. A carriage is made to reciprocate over the needle beds to actuate needles.

[0003] At the time of knitting, when a needle arranged on a needle bed is made to protrude into a yarn feeding position, a yarn feeder having a yarn feeding eyelet provided at the lower end of a yarn carrier must feed yarn at a point close to the top end of the needle. However, if yarn feeders of all of multiple yarn carriers arranged on a carrier rail are positioned close to the top end of a needle, when a yarn carrier that is moving crosses a yarn carrier that is standing, their yarn feeders will collide with each other or their yarn feeders will collide with a needle or a sinker. To solve such problems, the present applicant proposed a yarn feeding system that is described in Japanese Provisional Patent Hei 5-25658.

[0004] In this Japanese Provisional Patent Hei 5-25658, a catching means for selecting a yarn carrier and catching the yarn carrier, and a lowering means for bringing a yarn feeder provided at the top end of a feeder rod of a yarn carrier are provided between a carriage and a yarn carrier. When a catching pin of the catching member is to trail a yarn carrier, the lowering means will lower the top end of the feeder rod, that is energized to rise by a spring, against the spring's energization for rising. Thus a yarn feeding system that avoids the above problems in this way has been disclosed.

[0005] In the above yarn feeding system, however, the entire feeder rod is raised or lowered. Hence a spring coil, etc. of the lowering means, that energizes the feeder rod to rise and is interlocked with catching of the yarn feeder to lower the feeder rod, is required to exert a large force. This, in turn, gives large loads to supporting parts, etc. that support the feeder rod so that it can be moved up and down. The resulting yarn feeding system is inevitably larger in size, more complex in mechanism and heavier in weight.

[0006] In view of the above problems, one object of at least the preferred forms of the present invention is to provide a flat knitting machine having a yarn feeding system that is simple in construction, small in size and light in weight, and can bring the yarn feeder or a yarn carrier close to the top end of a needle when the needle that is arranged on a needle bed is made to protrude to a yarn feeding position.

[0007] Another object of at least the preferred forms of the present invention is to provide a yarn feeding system that can moderate interference of yarn carriers.

[0008] A flat knitting machine having a yarn feeding system according to the present invention is a flat knitting machine having at least a pair of needle beds with a large number of needles, one in a front and one in a back, top ends of said needle beds being opposed to each other so as to form a trick gap in between, said flat knitting machine having a yarn feeding system comprsing at least a carrier rail arranged above the needle beds and a yarn carrier movable along the carrier rail and for feeding yarn to the needles,

said flat knitting machine characterized in that said yarn carrier comprises :

a base movable along the carrier rail;
a plate guide having one end fixed to said base and extending from said base towards the trick gap; and
a feeder rod supported by said plate guide, extending from the base towards the trick gap, movable vertically, and having a yarn feeding eyelet at a bottom end towards the trick gap side, and that
said flat knitting machine furthere comprises :
raising means for keeping said feeder rod in a raised position while the yarn feeder is in a standby position; and
lowering means for lowering said feeder rod while yarn is to be fed from said yarn feeding eyelet to a needle.

[0009] With this arrangement, by lowering the feeder rod, the yarn feeding eyelet at the bottom end thereof is brought close to the top end of the needle, and in turn, yarn is reliably fed to the needle. Moreover, as only the feeder rod being light in weight is moved vertically, it is easy to move the feeder rod vertically, and the yarn feeding system is reduced in size.

[0010] Preferably, said flat knitting machine having a yarn feeding system is characterized by

a plurality of said carrier rails and a plurality of said yarn carriers being provided;
said plate guide and said base being an integral member;
the plate guides of the plural yarn carriers being arranged in radial directions having a center at the trick gap; and
the feeder rods being movable up and down in the radial directions.

[0011] By providing the guide and the base as an integral member, the yarn carrier is made simpler in structure and lighter in weight. Moreover, a clearance between two adjacent yarn guides is made larger, and a clearance between the feeder rod and other guides or feeder rods can be made larger when the feeder rod is raised.

[0012] Preferably, said flat knitting machine having a yarn feeding system is characterized by said plate guide being broader than said feeder rod and having two side edges along the carrier rail being tapered towards the

Skechers EX1013-p. 357
Skechers v Nike

bottom end thereof.

[0013] With this arrangement, when a yarn carrier crosses with another yarn carrier, if their guides contact with each other, the contacting point will shift from an upper part to a lower part of side edges, and the yarn carriers will be flexed and will cross more closely. Thus impacts of the collision between these yarn carriers is moderated.

[0014] Preferably, said flat knitting machine having a yarn feeding system further comprises a member being located near the bottom end of said feeder rod and above the yarn feeding eyelet, surrounding the feeder rod, being thicker in an upper part thereof than in a lower end thereof, being tapered towards the yarn feeding eyelet, and having an ellipsiodal horizontal section having a major axis being parallel with the carrier rail and a minor axis being perpendicular to the carrier rail.

[0015] With this arrangement, when the yarn carrier cross another yarn carrier, on the side of their feeder rods, the members of which sections are elliptic will contact with each other. As they are free of angles, impacts of collision are moderate, and they push away from each other to separate the yarn carriers.

[0016] Preferably, said flat knitting machine having a yarn feeding system is characterized by a yarn feeding member mounted on a lower end of said feeder rod, tapered towards the trick gap, and having a bottom end forming said yarn feeding eyelet.

[0017] The yarn feeding member is tapered, and can be made thinner than the feeder rod. Hence the yarn feeding member at the bottom end of the feeder rod will not interfere with a yarn from another yarn carrier when the yarn carrier is moved.

[0018] Preferably, said plurality of carrier rails are arranged along an arc facing said trick gap.

[0019] With this arrangement, all the yarn carriers arranged over needle beds is made of the same shape. Moreover, the higher is the position, the greater is the clearance between the yarn carriers. Hence collision is prevented by raising feeder rods.

[0020] Further, preferably, said raising means comprises a spring having two ends, one end mounted on said base and one end mounted on the feeder rod, and pushing up the feeder rod; and

a second guide is mounted on said base and guides the feeder rod vertically.

[0021] With this arrangement, the feeder rod is pressed upward by the spring coil, and the vertical movement of the feeder rod is guided by the guide member.

[0022] Preferably, said flat knitting machine having a yarn feeding system furthere comprises:

a catching member for catching and trailing the yarn carrier and comprising a main part, a pin driven by a solenoid so as to descend from the main part, swing members swingably mounted on the main part, and a rotational arm having two ends and rotatably mounted at said two ends, one at said swing member and one at said pin; and

an engaging member formed on an upper end of the base of said yarn carrier and engageable with the pin of said catching member, wherein

said feeder rod has a top engageable with and pushed down by said swing member while the swing member is swung towards the top.

[0023] With this arrangement, before the catching member catches the yarn carrier, a swing member will be swung to a position at which the swing member will push down the top of the feeder rod, and while the catching member travels, the swing member pushes down the top of the feeder rod. When the catching member does not catch, the swing member swings to a position at which the member will not push down the top of the feeder rod. Hence the push-down distance of the feeder rod by the swing member is made longer than the downward stroke of the pin for catching.

[0024] Preferably, said flat knitting machine having a yarn feeding system is characterized by a pair of swing pieces provided on the upper end of said base, being able to swing in a vertical plane, and having a gap in between and respective ends at said gap pushed up, and by

said engaging member comprising said gap.

[0025] With this arrangement, with the travel of the catching member, initially the catching pin pushes down one swing member and runs onto it, and when the pin reaches the gap between the pair of swing members, the swing members will be pushed up by a spring coil and the catching pin will be locked by the pair of swing members. As a result, the yarn carrier is caught and trailed reliably.

[0026] Certain embodiments of the invention will now be described, by way of example only, and with reference to the accompanying drawings:

Fig. 1 is a side view of a flat knitting machine provided with a yarn feeding system of an embodiment.

Fig. 2 is a partially cutaway front view of the yarn feeding system of Fig. 1.

Fig. 3 is a side view of the yarn feeding system along the line A-A of Fig. 2.

Fig. 4 is a front view of a feeder rod of a yarn carrier.

Fig. 5 is a front view of a feeder rod guide of the yarn carrier.

Fig. 6 is a diagram showing a guide provided to the feeder rod guide.

Fig. 7 is a diagram showing that the lower end of a catching pin of a catching member is in contact with the top of a swing member.

Fig. 8 is a diagram showing that the yarn carrier is being caught and trailed by the catching member.

Fig. 9 is a diagram showing a support means seen from the back of the yarn carrier.

Fig. 10 is a partially cutaway front view of a yarn

Skechers EX1013-p. 358
Skechers v Nike

carrier of a modification.

Fig. 11 is a front view of a yarn carrier of another modification.

Fig. 12 is a rear view of the yarn carrier of above modification.

Fig. 1. is a side view of a flat knitting machine having a yarn feeding system according to the present invention, and 1 denotes the flat knitting machine generally.

a side view of a flat knitting machine having a yarn feeding system according to the present invention, and 1 denotes the flat knitting machine generally.

[0027] In this flat knitting machine 1, top ends of a pair of needle beds 2, one. in the front and one in the rear, are opposed to each other on a frame 4, with the needle beds 2 forming an inverted V when seen from the side. Plural needles 6 are mounted on each needle bed 2 so that these needles 6 can be moved forward and backward. Carriages 8 are driven, by a belt driving means not illustrated, over the tops of the needle beds 2 to reciprocate and move needles 6 forward or backward through knitting cams 9 mounted on the carriages 8. The carriages 8 are integrally provided with a gate arm 10 that strides over the front and back needle beds 2. A catching member 14 for catching a yarn carrier 12 is mounted on the gate arm 10.

[0028] Four carrier rails 16 are supported by supporting brackets, that are provided on both ends of the flat knitting machine and are not illustrated, above the needle beds 2 in the longitudinal direction thereof. The carrier rails 16 are arranged radially with the center being close to the top ends of the needles 6 arranged on the needle beds 2. Yarn carriers 2, that will be described later, are movably supported on both the front and back faces of each carrier rail 16. The section of the carrier rail 16 is tapered downwards, and a yarn feeder 18 that is provided at the bottom end of each yarn carrier is positioned close to the top ends of needles 6 arranged on needle beds 2. When the carrier rails 16 are radially arranged as described above, all the yarn carriers supported by respective carrier rails 16 can have an identical form. In the present embodiment, two needle beds 2 are used. The number of needle beds 2, however, is not limited to two. For example, three or more needle beds 2 may be used.

[0029] Fig. 2 is a partially cutaway front view of the yarn feeding system, and Fig. 3 is a side view of the yarn feeding system along the line A-A. The yarn feeding system comprises a yarn carrier 12, a catching member 14 and a lowering means 22. The yarn carrier 12 is movably supported on a carrier rail 16 and feeds yarn to a needle 6. The catching member 14 catches and carries the yarn carrier 12 by means of a catching pin 20 that can be operated by a carriage 8 to move forward and backward. The lowering means 22 lowers a yarn feeder 18 that is provided at the lower end of the yarn carrier 12 close to the top end of a needle 6.

[0030] A carrier base 25 of the yarn carrier 12 is provided with a feeder rod 24 that can be moved up and down and a feeder rod guide 26. A yarn feeder 18 for feeding yarn to a needle 6 is mounted at the lower end of the feeder rod 24. The feeder rod guide 26 hangs down from the carrier base 25 and guides the feeder rod 24 in a vertical direction at the lower end of the guide 26. Fig. 4 and Fig. 5 are diagrams showing the feeder rod 24 and the feeder rod guide 25, respectively. Fig. 6 is a front view and a bottom view of a guide 46 that is provided on the feeder rod guide 26.

[0031] The feeder rod 24 is provided with a rod 28 that is a long and narrow plate, pipe, etc., a rising guide 38 above the rod 28, a push-down part 40 above the rising guide 38, and a yarn feeder 18 having a yarn feeding eyelet at the bottom end of the rod 28. A spring coil 30 is mounted on the rising guide 38 as a spring for energizing the feeder rod 24 upward. A protruding piece 34 is provided on a feeder box 32 to support the lower end of the spring coil 30, and a slot 36 is made in the rising guide 38 in the vertical direction. The protruding piece 34 is put into this slot 36. The push-down part 40 contacts the lowering means 22 that will be described later. The rising guide is made thicker than the rod 28. In the present embodiment, a pipe-shaped yarn feeder 18 is fitted at the bottom end of the rod 28. A slot 42 is formed in the upper end of the rod 28, and the rising guide 38 and the rod 28 are joined together with a screw 44; their overall height can be adjusted.

[0032] The feeder rod guide 26 is made of a thin plate having appropriate elasticity and hardness. The guide 26 is wider than the feeder rod 24. There is a broad part 27 in the lower part of the feeder rod guide 26. To guide the feeder rod 24 in the vertical direction, a guide 46 is fitted at the bottom end of the guide 26. The guide 46 is provided with grooves 48 for vertically guiding the lower parts of the guide 26 and a through hole 50 for vertically guiding the yarn feeder 18. Thick and smooth buffer surfaces 47 are formed on both the front and the back of the guide 46. These buffer surfaces moderate impacts when the yarn carrier 12 come to cross and contact with another yarn carrier 12; the yarn carriers 12 will push each other to separate from each other. As described above, when the feeder rod 24 is guided at the lower end of the feeder rod guide 26 in the vertical direction, yarn will be fed to a needle 6 reliably.

[0033] Both the left and right side edges of the broad part 27 in the lower portion of the feeder rod guide 26 are tapered downward to form flanks 52a, 52b of the yarn carrier 12. They are designed to moderate shocks of contacts the yarn carrier 12 may have with another yarn carrier 12 when the yarn carrier 12 is moved by the catching member 14 that will be described later. The flanks of the yarn carrier 12 are divided into two parts: the lower carrier flanks 52a and the upper carrier flanks 52b. When two yarn carriers 12, that are normally adjacent to each other, cross with each other, the lower carrier flanks 52a of the respective yarn carriers 12 will contact with each other. Since the lower carrier flanks 52a

Skechers EX1013-p. 359
Skechers v Nike

are tapered towards the bottom end, they can moderate shocks of contacts between the yarn carriers 12. At the time of a contact, the feeder rod guides 26 of both yarn carriers 12 will be flexed, and the guides 46 of the two yarn carriers 12, being provided on the feeder rod guides 26, will contact with each other. Since buffer surfaces 47 being thick smooth slopes are formed on the guides 46, the guides 46 will moderate the shocks of contacts between the yarn carriers 12. The buffer surfaces 46 act to push against each other to separate the yarn carriers.

[0034] When a yarn carrier 12, that is moving with its feeder rod guide 26 being flexed due to a contact with another yarn carrier 12, cross another (third) yarn carrier 12, their upper carrier flanks 52b will contact with each other. Since the upper flanks 52b are tapered downward just like the lower flanks 52b, they can moderate the shocks of contacts between yarn carriers 12.

[0035] Slopes 53, being tapered downward, are formed on both left and right side edges of the top end of the feeder rod guide 26, that is below the guide 46. These slopes 53 act to avoid interference with yarn extending from another yarn carrier 12 to the needle 6 when the yarn carrier 12 is moved by the catching member 14. The feeder rod guide 26 of the present invention is formed integrally with the carrier base 25 to reduce the number of parts of the yarn carrier 12 and the weight thereof.

[0036] An engaging means 54 is formed on the top end of the yarn carrier 12, and the catching member 14, that will be described later, makes a catching pin 20 engage with the engaging means 54 to catch and trail the yarn carrier 12. The engaging means 54 is formed between a pair of left and right swing pieces 56, 56 that are supported by axes in the upper portion of the yarn carrier 12 so that they can swing in vertical directions. One end, on the center side of the yarn carrier 12, of the swing piece 56 is energized upward by a spring coil 59 in a groove 58 of the feeder box 32 to assume a position higher than the fulcrum of the swing piece 56.

[0037] The catching member 14 comprises a solenoid 62 and a transmission lever 64. The solenoid 62 receives signals from a controller not illustrated to make an output plunger 60 protrude or retract. The transmission lever 64 transmits the movement of the output plunger 60 of the solenoid 62 to the catching pin 20. The catching pin 20 is energized downward by a spring coil 66, and the catching member 14 makes the catching pin 20 engage with the engaging means 54 formed between a pair of left and right swing pieces 56, 56 on the top of each yarn carrier to catch and trail the yarn carrier 12.

[0038] With the feeder rod 24 being energized upward by the spring coil 30, the rising guide 38 of the feeder rod 24 is supported in a groove 68 made in the feeder box 32 so that the feeder rod 24 can be moved upward and downward. The lowering means 22 is provided with a cam plate 70 for pressing down the feeder rod 24, and the cam plate 70 is linked with the catching pin 20 of the catching member 14, via a linking arm 72. Being interlocked with the vertical movements of the catching pin 20, the cam plate 70 will swing to and fro with a pin 74 of the swing axis as the center. On the lower end of the cam plate 70 is formed a push-down cam 78 for pushing down the top end 76 of the push-down part 40 of the feeder rod 24. When the cam plate 70 of the lowering means 22 pushes down the feeder rod 24, the yarn feeder 18 being provided at the lower end of the feeder rod 24 will protrude from the bottom end of the feeder rod guide 26.

[0039] Next, the action of the yarn feeding system at the time of knitting will be described.

[0040] When the carriage 8 is driven by a belt driving means, according to output signals of a controller not illustrated, to travel over the needle bed 2, needles 6 arranged on the needle bed 2 are moved forward or backward by knitting cams 9. When the carriage 8 is travelling, for a portion for which knitting is not made, the solenoid 62 will be actuated by an output signal for pattern knitting to make the output plunger 60 protrude downward. The catching pin 20 of the catching member 14 will be raised by the output plunger 60, via the transmission lever 64, against the tensile force of the spring coil 66. With the rising of this catching pin 20, the cam plate 70 of the lowering means 22 will be swung up with the swing axis pin 74 as the center.

[0041] For a portion for which knitting is made, at a point this side of a position at which the carriage 8 faces a specified yarn carrier for feeding yarn to a needle 6, the solenoid 62 will be actuated by an output signal of the controller not illustrated, and the output plunger 60 will be retracted upward. The catching pin 20, that has been raised, will be pushed down by the tensile force of the spring coil 66. Being interlocked with the pushing down of the catching pin 20, the cam plate 70 of the lowering means 22 will be swung, via the linking arm 72, towards the yarn carrier 12 with the swing axis pin 74 as the center.

[0042] The carriage 8 travels, and the lower end of the protruding catching pin 20 will come to contact with the top of a swing piece 56, on the upstream side of the travel direction of the carriage 8, of the pair of left and right swing members 56 in the upper part of the yarn carrier 12. As a result, one end, on the center side of the yarn carrier 12, of the swing member 56 will be swung downward against the upward energization by the spring coil 59 (Fig. 7). When the carriage 8 travels further, the push-down cam 78, that is formed on the lower end of the cam plate 70, will come to contact the top end 76 of the push-down part of the feeder rod 24 to push the feeder rod 24 downward. As a result, the yarn feeder 18 at the bottom end of the feeder rod 28 will protrude from the bottom end of the feeder rod guide 26 so that it can feed yarn to a needle 6.

[0043] When the catching pin 20 enters into the engaging means 54 between swing pieces 56, 56, the swing piece 56, that has been swung downward by the

Skechers EX1013-p. 360
Skechers v Nike

catching pin 20, will be swung back to the original position by the upward energization of the spring coil 59. As a result, the catching pin 20 will be held between the sides 80 of the pair of swing pieces 56, 56, and the yarn carrier 12 will be trailed by the carriage 8. At this time, yarn will be fed from the yarn feeder 18 of the yarn carrier 12 to a needle 6 (Fig. 8). With this arrangement, even if knitting of a fabric is made at a high speed, the catching member 14 can reliably engage the catching pin 20 with the engaging means 54 to catch and trail a yarn carrier 12.

[0044] In the present embodiment, between a pair of left and right swing pieces 56, 56 that are provided on the yarn carrier at the top end and near the center thereof, is provided a space sufficient for engagement of the catching pin 20 of the catching member 14. However, it is not always necessary to provide a space between the pair of left and right swing pieces 56, 56.

[0045] When the carriage 8 comes to a specified position for releasing the yarn carrier 12 or actuating another yarn carrier 12, the solenoid 62 will be actuated by an output signal from the controller not illustrated, and the output plunger 60 will be made to protrude downward. As a result, the catching pin 20, that has been lowered, will be pushed up against the tensile force of the spring coil 66. With the rise of this catching pin 20, the cam plate 70 of the lowering means 22 will be swung up with the swing axis pin 74 as the center.

[0046] When the catching pin 20 is raised and, in turn, the engagement between the catching pin 20 and the side 80, on the center side of the yarn carrier, of the swing piece 56 on the downstream side of the travel direction of the carriage 8 is undone, the yarn carrier 12 will be released, and due to swinging up of the cam plate 70, the feeder rod 24, that has been pressed down, will be pushed up by the spring coil 30 to a position at which the yarn feeder 18 at the bottom end thereof will not interfere with the yarn feeder 18 of another yarn carrier 12, a needle 6, a sinker, etc.

[0047] When the carriage 8 comes to a position for actuating another yarn carrier 12, the solenoid 62 will be actuated by an output signal of the controller, and the output plunger 60 will be retracted upward. The catching pin 20, that has been raised, will be pushed down by the tensile force of the spring coil 66, and the cam plate 70 of the lowering means 22 will be swung towards the yarn carrier 12 with the swing axis pin 74 as the center. The catching pin 20 will be lowered to enter into the engaging means 54 of the yarn carrier 12. Under this condition, when the carriage 8 travels further, the push-down cam 78, that is formed on the lower edge of the cam plate 70, will push down the feeder rod 24, and the yarn feeder 18, that is provided at the bottom end of the feeder rod, will protrude to the yarn feeding position in which the yarn feeder 18 is close to the top end of the needle 6. After that, the fabric is knitted with yarns fed by yarn feeders of yarn carriers 12 selected in a procedure similar to that described above.

[0048] Fig. 9 is a diagram showing a supporting means 82 for supporting a yarn carrier 12 on a carrier rail 16, that is seen from the rear of the yarn carrier 12. A pair of left and right rollers 84A, 84A and a pair of left and right rollers 84B, 84B are mounted in the upper part and the lower part of the carrier base 25 of the yarn carrier 12, respectively. Grooves 86 are made on both the front and the back of the carrier rail 16 in the longitudinal direction thereof. Protruding slopes 88 conical in section are provided in the upper part and the lower part of each groove 86. The yarn carrier 12 is supported by fitting the upper and lower pairs of left and right rollers 84A, 84B on the protruding slopes 88 conical in section, that are formed on the carrier rail 16. The lower pair of left and right rollers 84B, that are mounted on the yarn carrier 12, are energized downward by a leaf spring 90 that is provided between the rollers. With this, the yarn carrier 12 is supported on the carrier rail 16 more reliably. When the yarn carrier 12 is supported on the carrier rail 16 as described above, the yarn carrier 12 can be effectively prevented from coming off the carrier rail 16 and the carrier 12 can be moved with lower friction.

[0049] The carrier rail 16 is provided with plates made of a magnetic material, that are not illustrated, over the entire length thereof. These plates are attracted by a magnet, not illustrated, that is mounted on the yarn carrier being held on the carrier rail 16, on a surface opposing the above plates. Because of this arrangement, when the yarn carrier 12 is released from the catching pin 20, the yarn carrier 12 will quickly come to a halt due to the attractive force of the magnet.

[0050] Supporting means 82 are not limited to rollers. Any means of low frictional resistance such as ball bushings may be used. The carrier rail 16 can be reduced in weight by making the carrier rail 16 from aluminium or the like, and making the slopes 88 conical in section that directly support the rollers 84 of the yarn carrier 12 from steel.

[0051] With regard to the lowering means 22, being linked with catching of the yarn carrier 12 by the catching member 14, the cam plate 70 makes the feeder rod 24 move downward. In this way, the downward movement of the feeder rod 24 is made greater than the amount of protrusion of the catching pin 20. However, the feeder rod 24 may be moved downward directly by the catching pin 20, etc.

[0052] In the above embodiment, flanks 52 are formed on both the left and right side edges in the lower portion of the feeder rod guide 26. These flanks are intended to moderate impacts of a contact that will occur when the yarn carrier 12 is moved by the catching member 14 to cross another yarn carrier 12. However, if the feeder rod guides 26 of yarn carriers 12 do not contact with each other, for example, when the amount of vertical movement that the feeder rod 24 can make is increased and the push-down amount of the feeder rod 24 by the cam plate 70 of the lowering means 22 is increased, there is no need of forming flanks 52 on the

Skechers EX1013-p. 361
Skechers v Nike

feeder rod guides 26.

[0053] Next, a modification of the present invention will be described with reference to drawings. Fig. 10 is a partially cutaway front view of a yarn carrier 92. In this modification, flanks 98 for yarn are formed on both sides of a yarn feeder 96 having a yarn feeding eyelet, that is provided at the lower end of the feeder rod 94, by tapering towards the lower end of the yarn feeder 96. The lowering means 22 makes the feeder rod 94 move downward. The feeder rod 94, in turn, makes the yarn feeder 96 having flanks for yarn on both sides thereof protrude from the top end of the feeder rod guide 26. With this arrangement, when the yarn carrier 92 is moved by the catching member 14, the yarn feeder 96 at the bottom end of the feeder rod 94 will not interfere with any yarn extending from the yarn feeder 92 of another yarn carrier 92 to a needle 6; thus more stable supply of yarn can be achieved. The yarn feeder 96 having flanks 98 for yarn is provided with thick and smooth slopes 100 formed on the front and the back of the yarn carrier. These slopes 100 act in such a way that the yarn carrier 92 pushes away another yarn carrier 92.

[0054] With reference to Fig. 11 and Fig. 12, another modification will be described. Except some points that will be described below, this modification is similar to other embodiments. A new yarn carrier 101, that is similar to the yarn carrier 12 of Fig. 1 through Fig. 9, is used. In Fig. 11, 103 denotes a carrier base. A cam plate 105 is provided so that the cam plate 105 can slide sidewise relative to the base 103. A cam groove 107 and a pin 109 that is provided at the top of a member 38 are arranged so that the pin 109 can slide in the cam groove 107. 111 denotes a slide groove that allows the cam plate 105 to slide relative to the base 103. 113 is a driving belt that makes the yarn carrier 101 run along the rail 16.

[0055] The rear of the yarn carrier 101 is shown in Fig. 12. 115 denotes a magnet that is mounted on the back of the cam plate 105. The magnet 115 attracts, for example, the rail 16 made of steel, and generates a frictional force on the cam plate 105 so that the cam plate 105 lags behind the base 103 in movement. As a result, when the yarn carrier 101 is made to run by the belt 113, a kind of force of inertia due to the magnet 115 will work on the cam plate 105, and the cam plate 115 will slide backward relative to the moving direction in the slide groove 111. The pin 109 will be pushed down, and the feeder rod 24 will move downward and the yarn feeder 18 will come close to a needle. When the belt 113 is stopped and the yarn carrier 101 is stopped, under the influence of the spring coil 30, the pin 109 will move towards the center of the slide groove 107. With this force, the cam 105 will move in the slide groove 111, and the pin 109 will be restored to the top of the groove 107.

[0056] In Fig. 11 and Fig. 12, the yarn carrier 101 is driven by the belt 113. However, it may be driven by the catching member 14. In that case, the cam plate 70, etc. will not be required. With regard to processing after stoppage of the yarn carrier 101, for example, the belt 113 may be moved in the reverse direction just a little to use the force to restore the cam plate 105. Or the restoring force of the pin 109 to the top of the cam groove 107 may be increased by attaching one end of a spring coil to the left and one end of another spring coil to the right of the spring coil and attaching the other ends of the spring coils to the cam plate 105.

[0057] In the above embodiments, a flat knitting machine in which plural carrier rails 16 are arranged radially was described. The present invention, however, can be applied to a flat knitting machine in which plural carrier rails 16 are arranged horizontally. In this case, to bring the lower ends of the yarn carriers 12, 92 close to a needle 6, the feeder rod guides 26 are bent in the middle, and the rods of the feeder rods 24, 94 are mode of a flexible material such as a leaf spring.

Claims

1. A flat knitting machine having at least a pair of needle beds with a large number of needles, one in a front and one in a back, top ends of said needle beds being opposed to each other so as to form a trick gap in between, said flat knitting machine having a yarn feeding system comprsing at least a carrier rail arranged above the needle beds and a yarn carrier movable along the carrier rail and for feeding yarn to the needles,

   said flat knitting machine characterized in that said yarn carrier comprises :
   a base movable'along the carrier rail;
   a plate guide having one end fixed to said base and extending from said base towards the trick gap; and
   a feeder rod supported by said plate guide, extending from the base towards the trick gap, movable vertically, and having a yarn feeding eyelet at a bottom end towards the trick gap side, and that
   said flat knitting machine furthere comprises:
   raising means for keeping said feeder rod in a raised position while the yarn feeder is in a stand-by position; and
   lowering means for lowering said feeder rod while yarn is to be fed from said yarn feeding eyelet to a needle.

2. A flat knitting machine having a yarn feeding system of claim 1 characterized by

   a plurality of said carrier rails and a plurality of said yarn carriers being provided;
   said plate guide and said base being an integral member;
   the plate guides of the plural yarn carriers being arranged in radial directions having a center at

Skechers EX1013-p. 362
Skechers v Nike

the trick gap; and
the feeder rods being movable up and down in the radial directions.

3. A flat knitting machine having a yarn feeding system of claim 1 or 2 characterized by said plate guide being broader than said feeder rod and having two side edges along the carrier rail being tapered towards the bottom end thereof.

4. A flat knitting machine having a yarn feeding system of claim 3 further comprising a member being located near the bottom end of said feeder rod and above the yarn feeding eyelet, surrounding the feeder rod, being thicker in an upper part thereof than in a lower end thereof, being tapered towards the yarn feeding eyelet, and having an ellipsiodal horizontal section having a major axis being parallel with the carrier rail and a minor axis being perpendicular to the carrier rail.

5. A flat knitting machine having a yarn feeding system of claim 1, 2 or 3 characterized by a yarn feeding member mounted on a lower end of said feeder rod, tapered towards the trick gap, and having a bottom end forming said yarn feeding eyelet.

6. A flat knitting machine having a yarn feeding system of any preceding claim characterized in that said plurality of carrier rails are arranged along an arc facing said trick gap.

7. A flat knitting machine having a yarn feeding system of claim 1 characterized in that

said raising means comprises a spring having two ends, one end mounted on said base and one end mounted on the feeder rod, and pushing up the feeder rod; and that
a second guide is mounted on said base and guides the feeder rod vertically.

8. A flat knitting machine having a yarn feeding system of claim 7 further comprising:

a catching member for catching and trailing the yarn carrier and comprising a main part, a pin driven by a solenoid so as to descend from the main part, swing members swingably mounted on the main part, and a rotational arm having two ends and rotatably mounted at said two ends, one at said swing member and one at said pin; and
an engaging member formed on an upper end of the base of said yarn carrier and engageable with the pin of said catching member, wherein said feeder rod has a top engageable with and pushed down by said swing member while the swing member is swung towards the top.

9. A flat knitting machine having a yarn feeding system of claim 8 characterized by a pair of swing pieces provided on the upper end of said base, being able to swing in a vertical plane, and having a gap in between and respective ends at said gap pushed up, and by said engaging member comprising said gap.

Skechers EX1013-p. 363
Skechers v Nike

FIG. 1



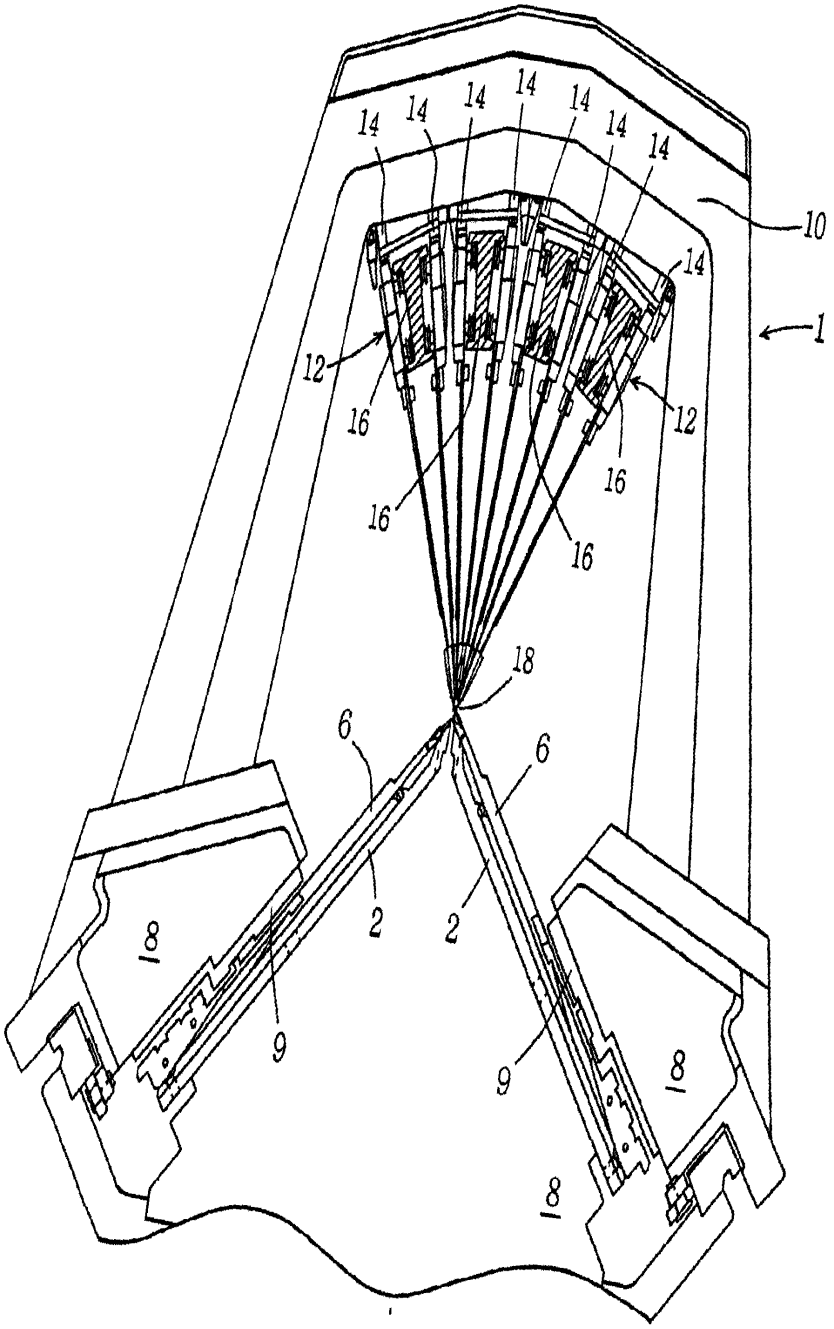


FIG. 2

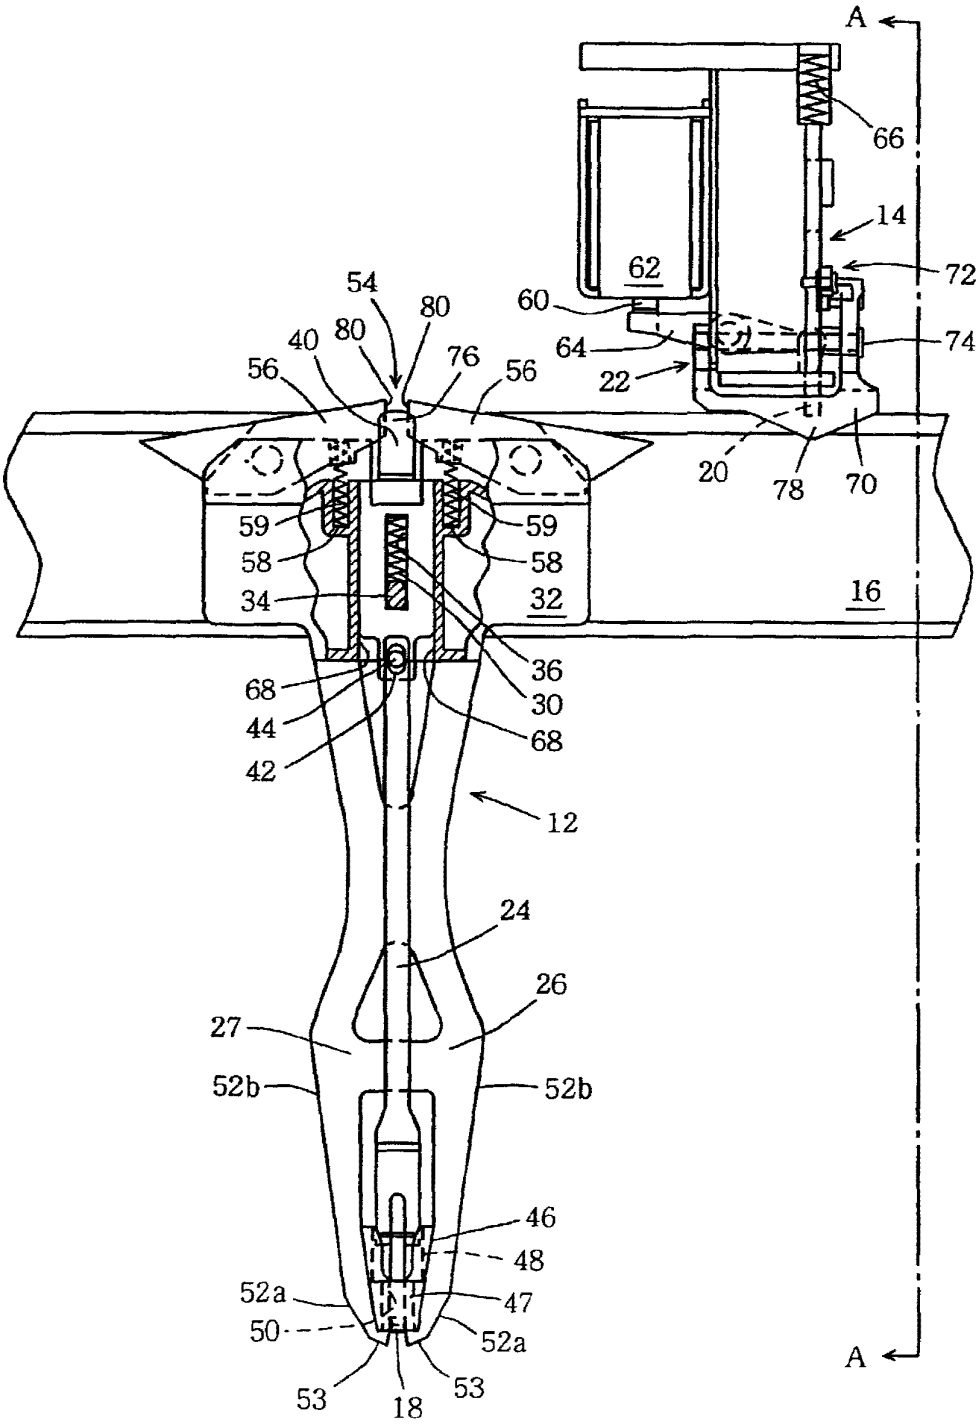


Skechers EX1013-p. 365
Skechers v Nike

FIG. 3

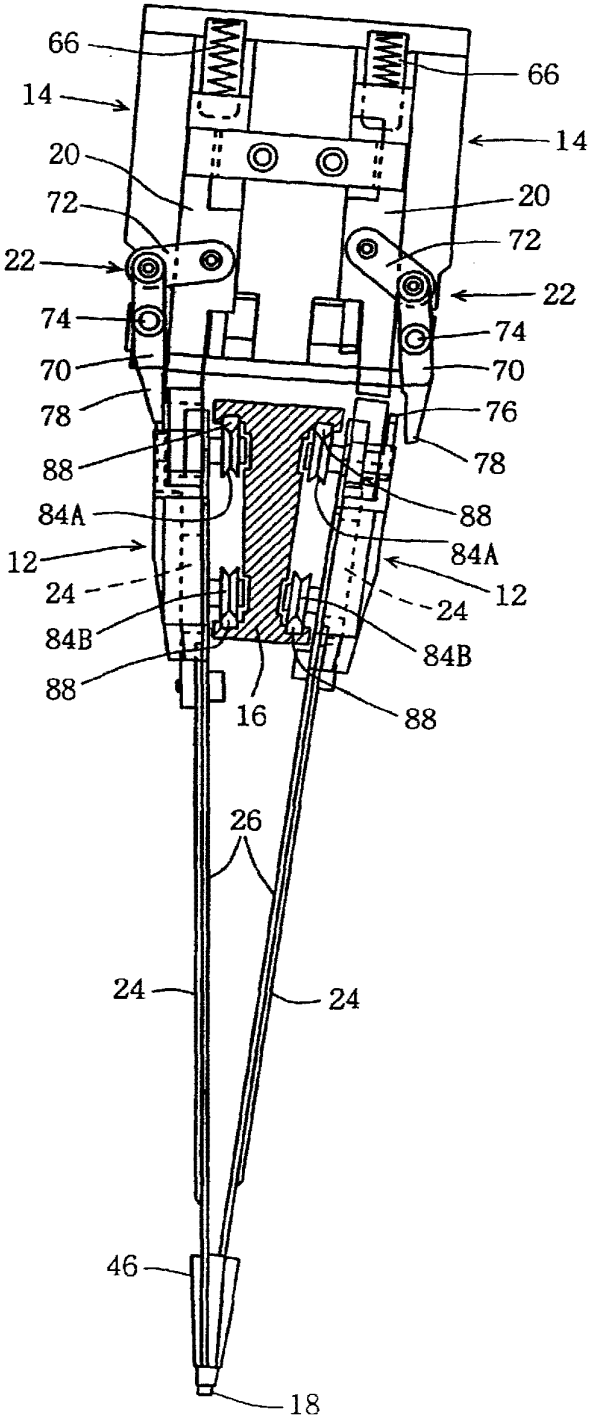


Skechers EX1013-p. 366
Skechers v Nike

FIG. 4

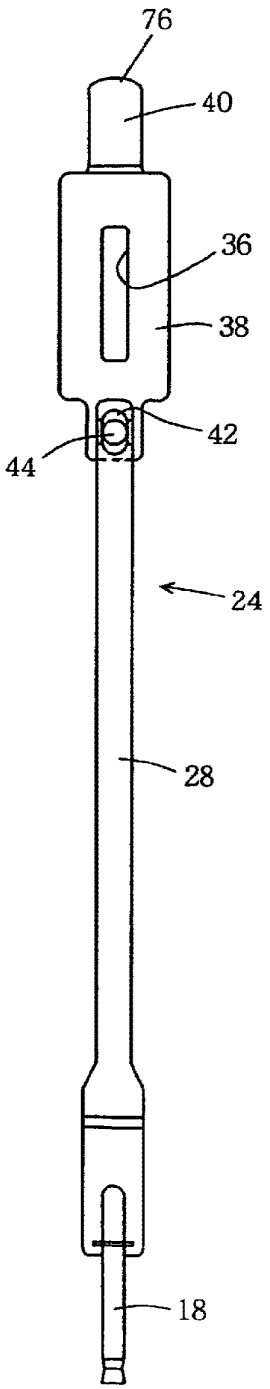


Skechers EX1013-p. 367
Skechers v Nike

FIG. 5

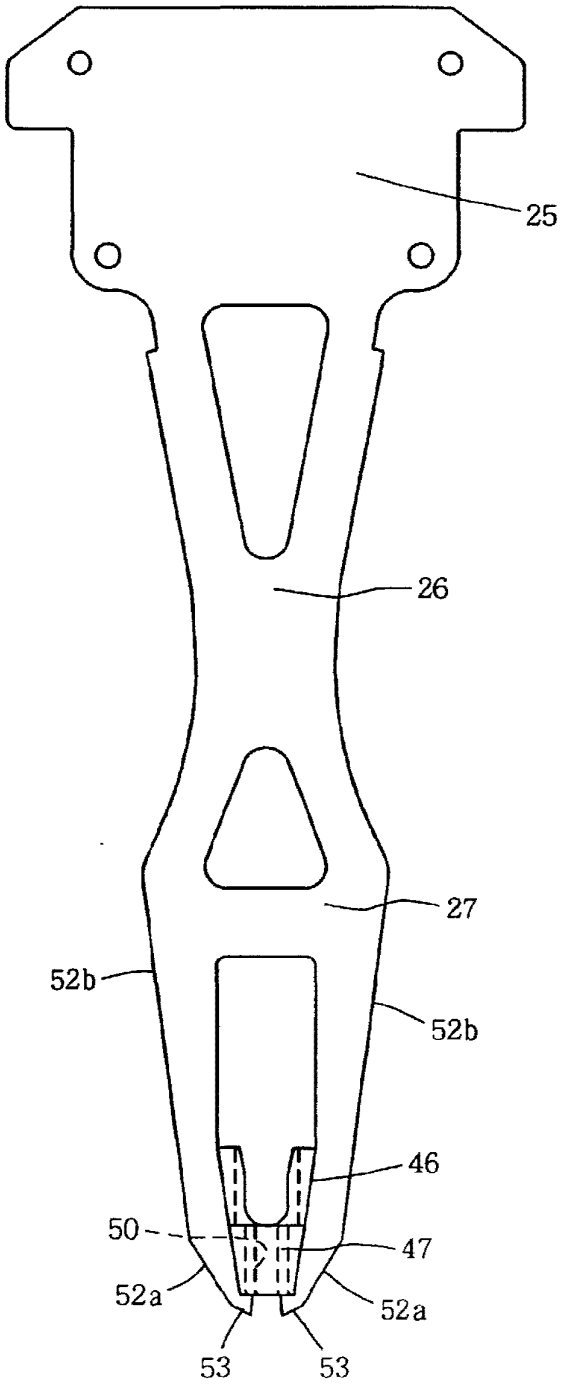


Skechers EX1013-p. 368
Skechers v Nike

FIG. 6

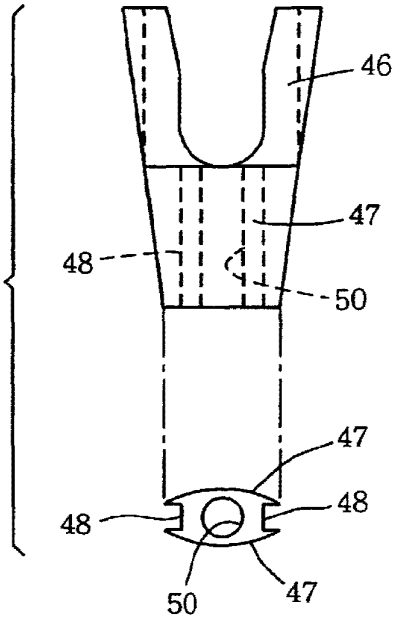


Skechers EX1013-p. 369
Skechers v Nike

FIG. 7

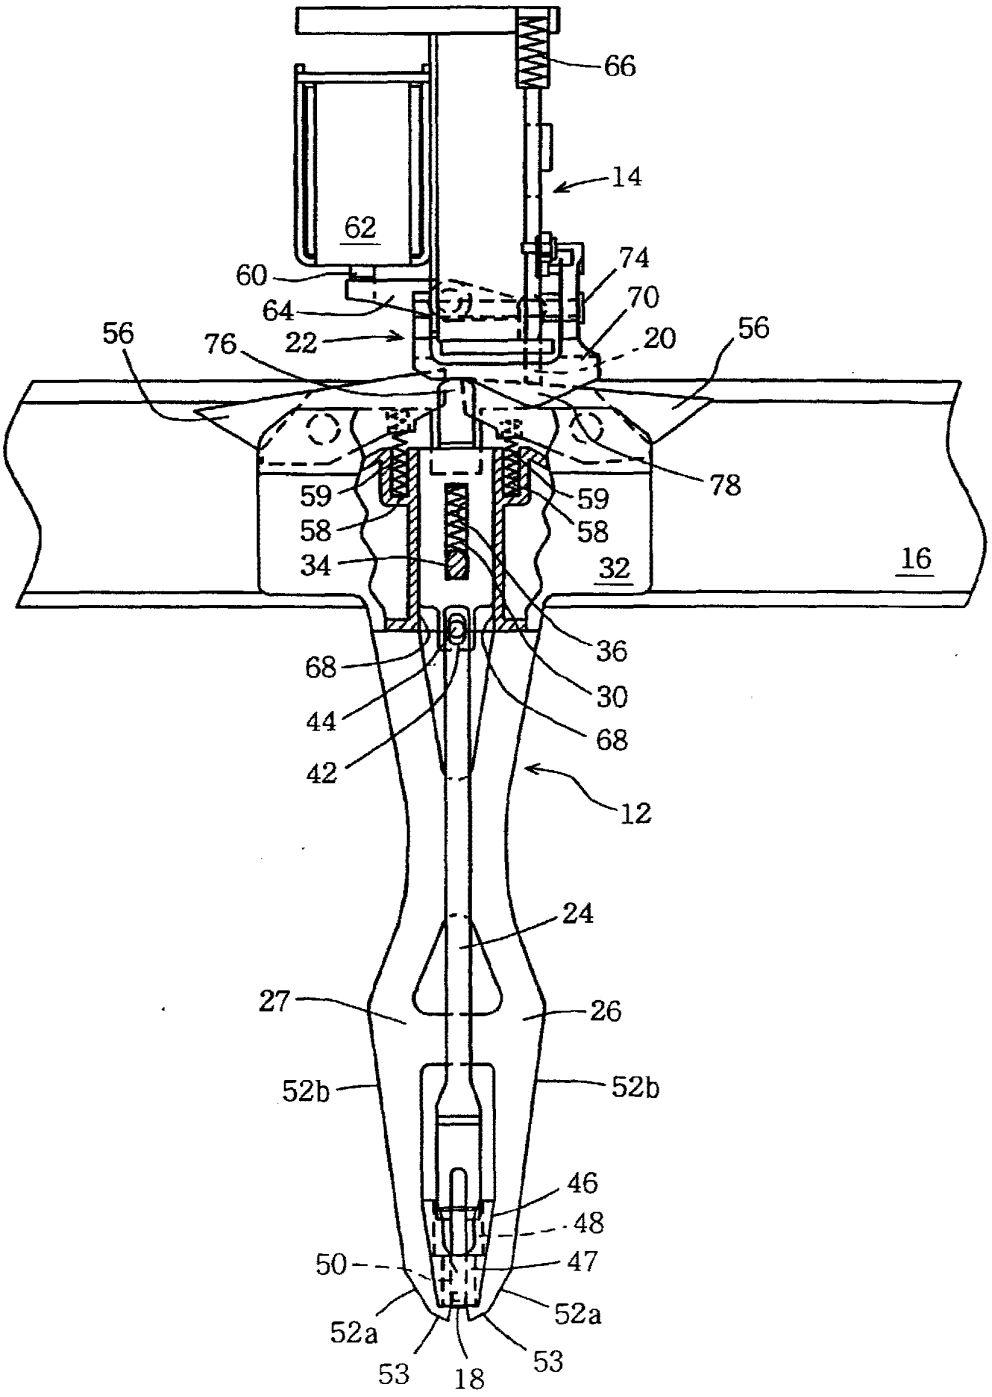


Skechers EX1013-p. 370
Skechers v Nike

FIG. 8

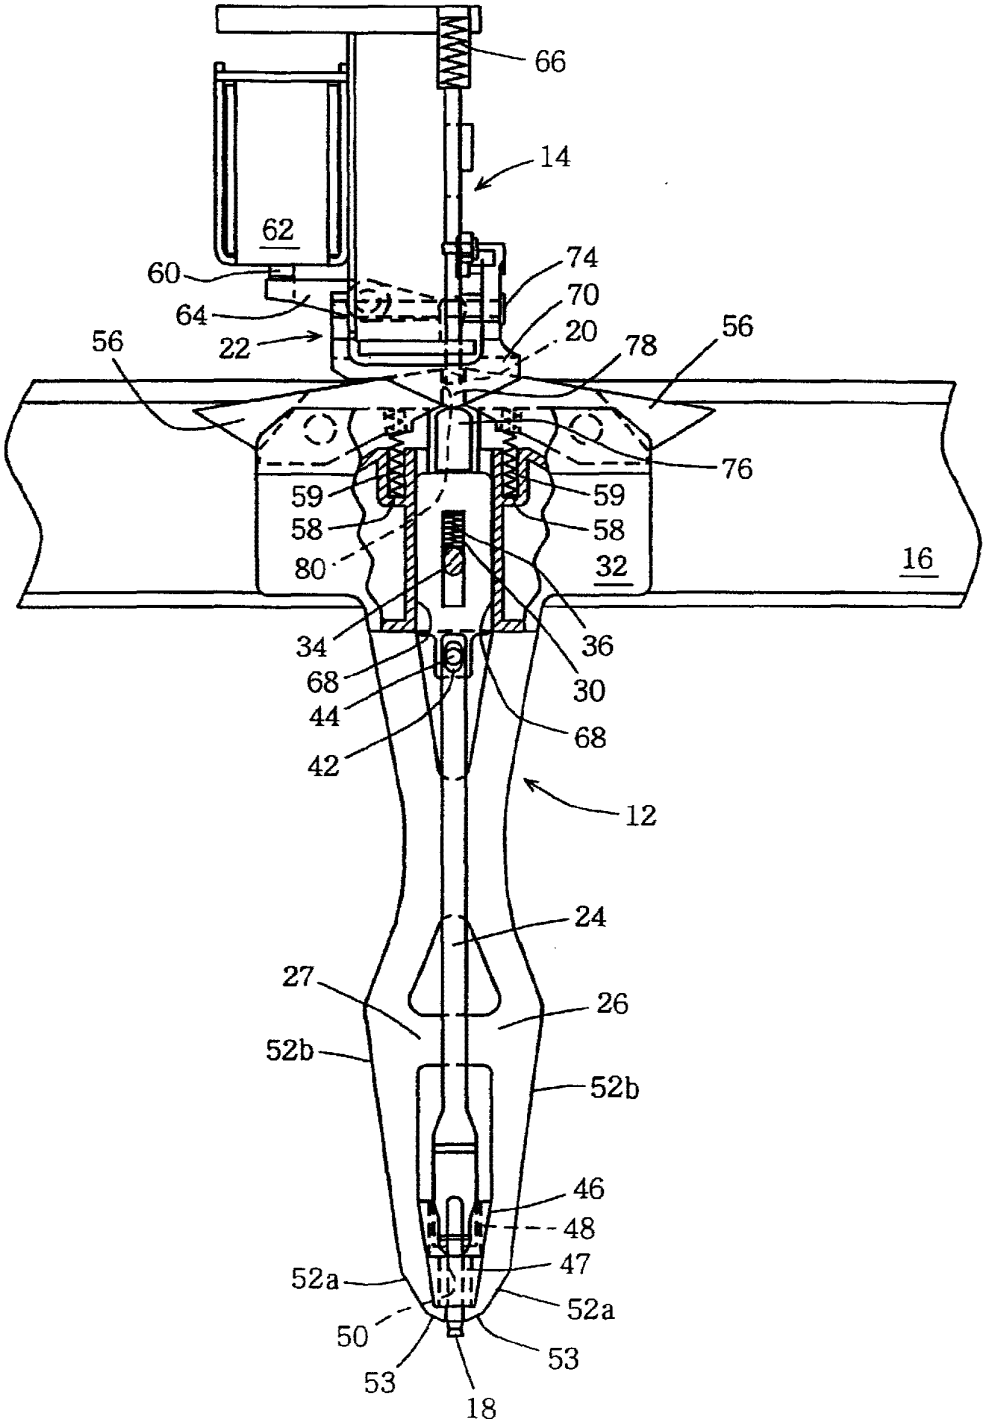


Skechers EX1013-p. 371
Skechers v Nike

FIG. 9

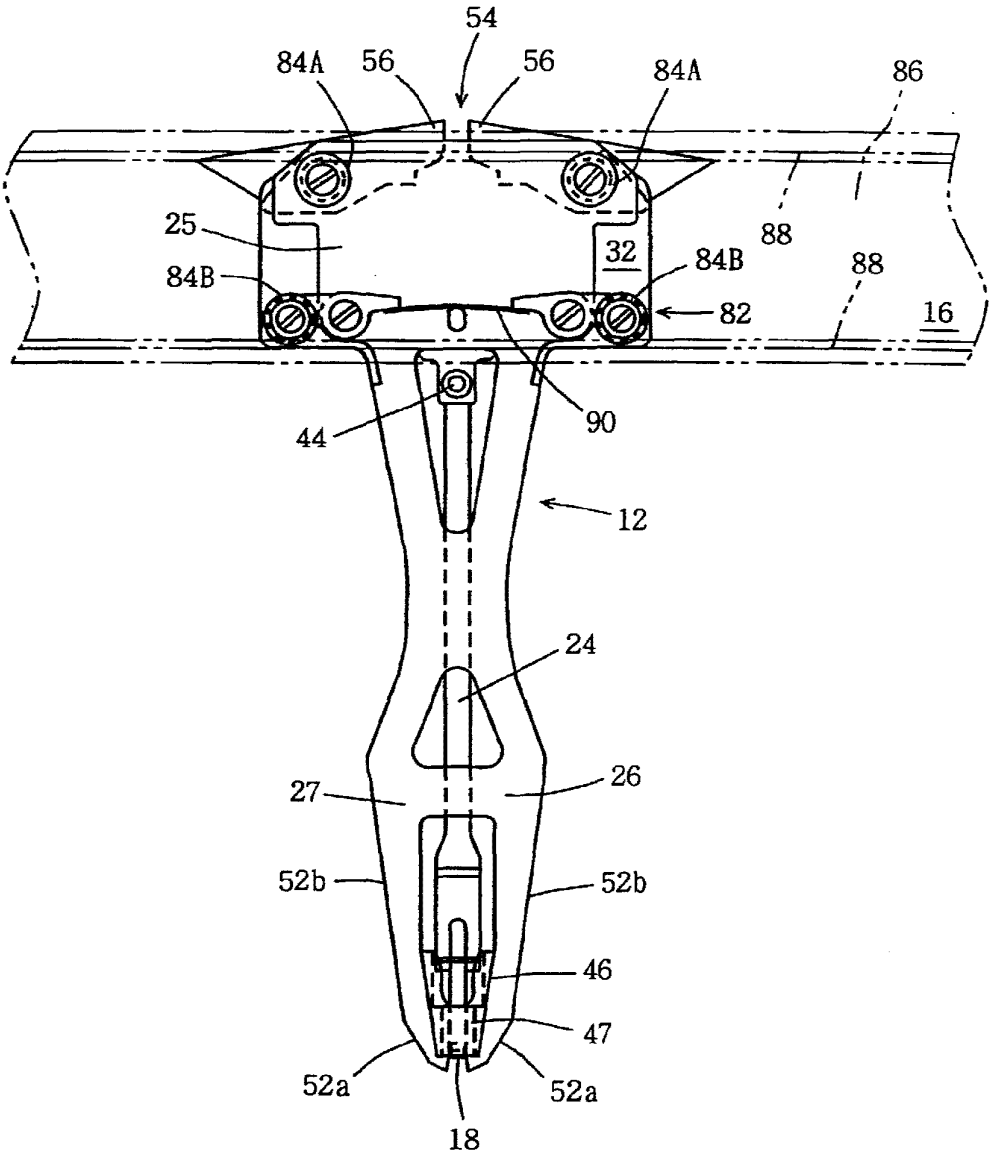


Skechers EX1013-p. 372
Skechers v Nike

FIG. 10

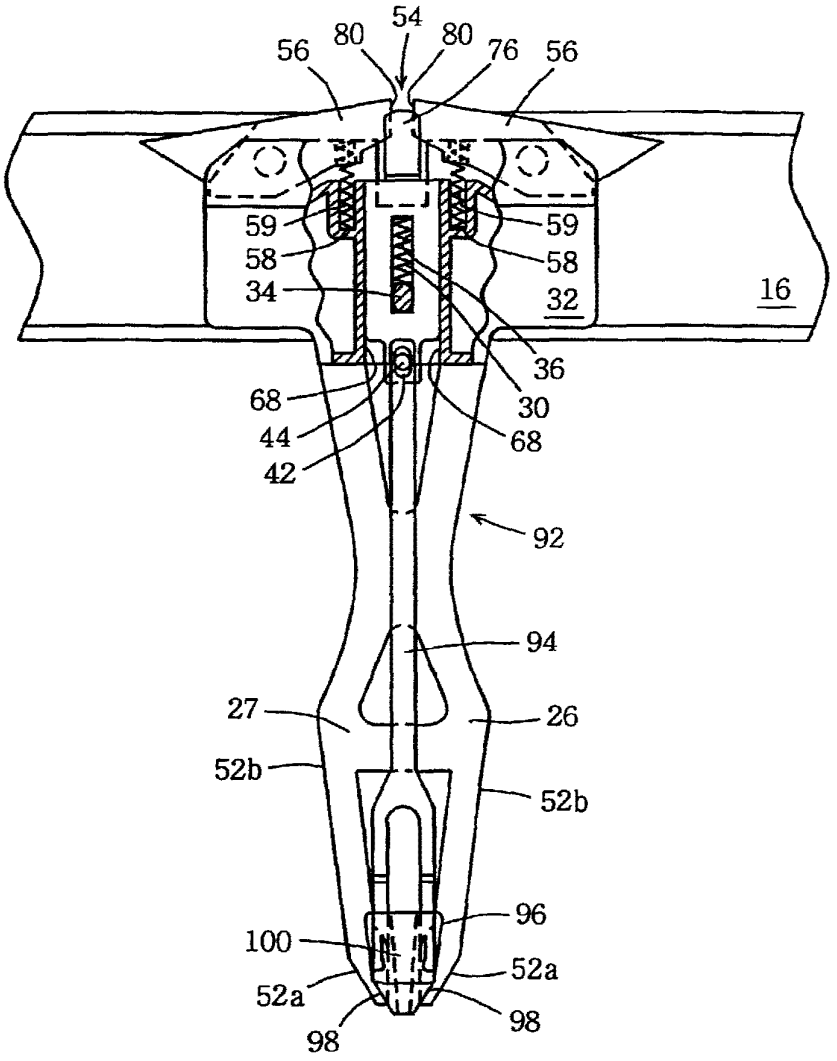


Skechers EX1013-p. 373
Skechers v Nike

FIG. 11

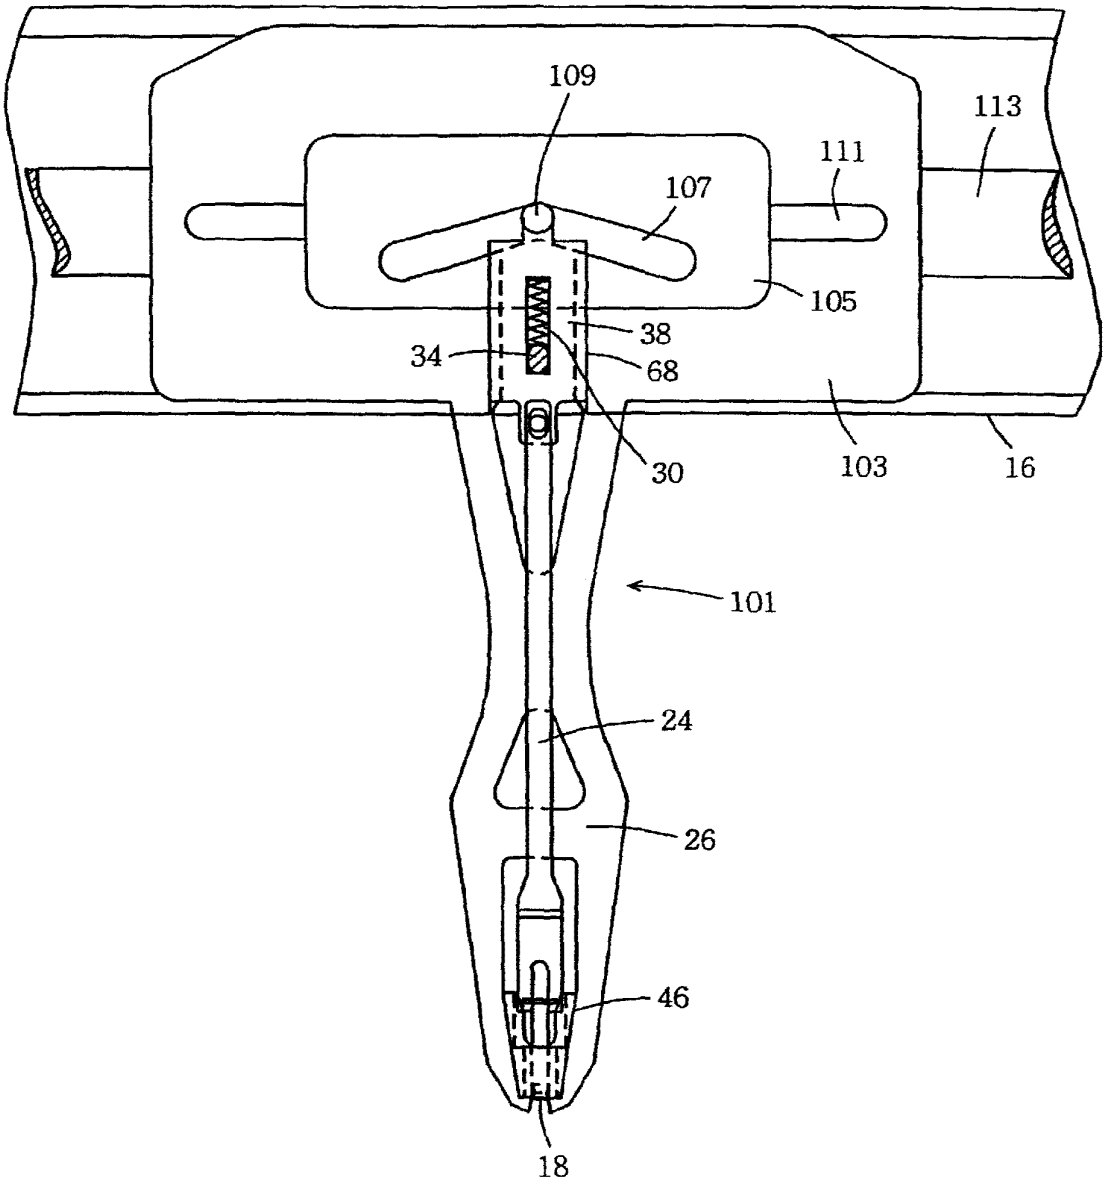

Skechers EX1013-p. 374
Skechers v Nike

FIG. 12

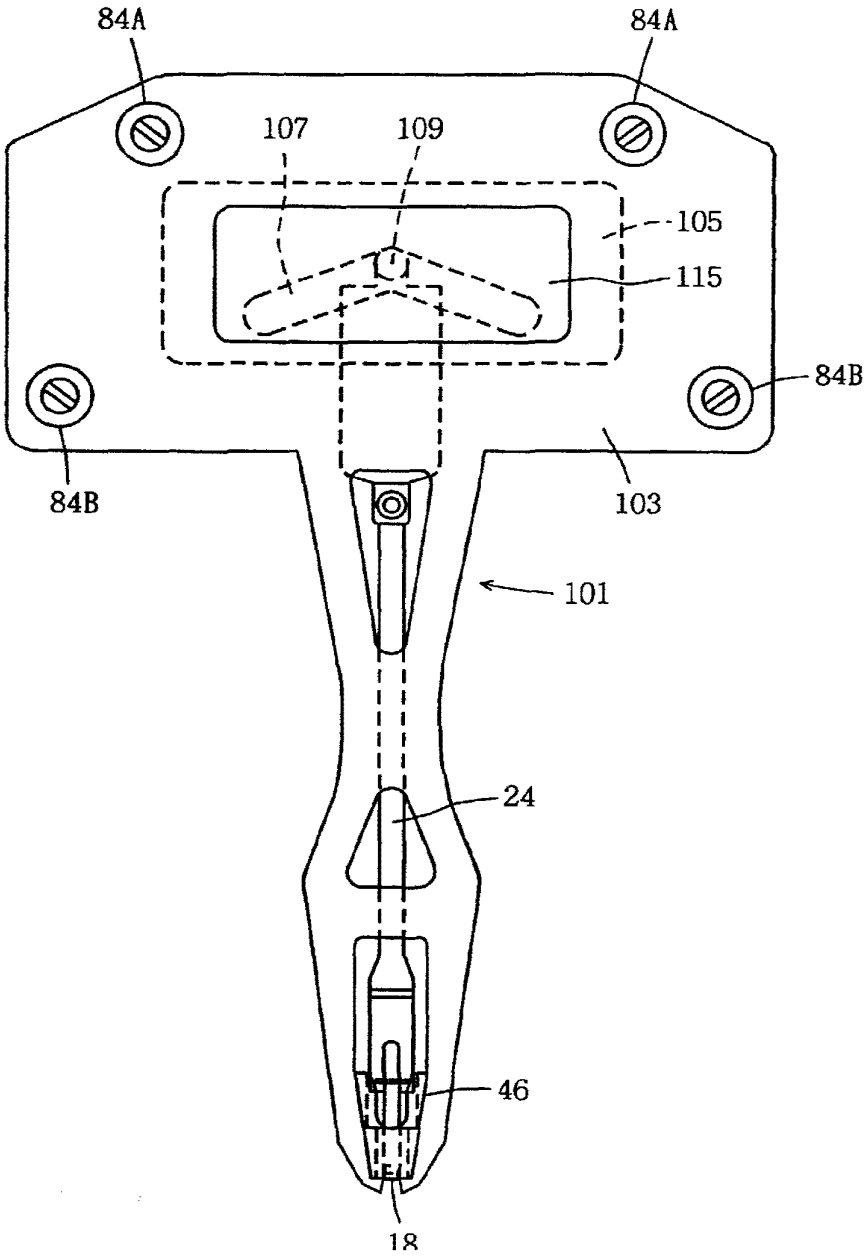

Skechers EX1013-p. 375
Skechers v Nike

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 437 057 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
14.07.2004 Bulletin 2004/29

(51) Int Cl.[7]: **A43B 1/00**, A43B 5/06, A43B 7/06, D04B 21/02

(21) Application number: **04000365.9**

(22) Date of filing: **09.01.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(30) Priority: **10.01.2003 JP 2003004903**
25.11.2003 JP 2003394141

(71) Applicant: **Mizuno Corporation**
Osaka-shi, Osaka 541-8538 (JP)

(72) Inventors:
- **Orei, Takeshi**
  Osaka-shi Osaka 559-8510 (JP)
- **Matsuzaki, Takeshi**
  Osaka-shi Osaka 559-8510 (JP)
- **Yamamoto, Tetsuo**
  Osaka-shi Osaka 559-8510 (JP)

(74) Representative:
Diehl, Hermann, Dr. Dipl.-Phys. et al
DIEHL, GLÄSER, HILTL & PARTNER
Patentanwälte
Augustenstrasse 46
80333 München (DE)

(54) Light weight shoes

(57) A shoe (20) including an upper material using a double raschel warp knitted fabric is provided. The upper material includes a first surface having a non-mesh structure and a second surface having a non-mesh structure part (A)(1a-1d), a mesh structure part (B)(2) and a mesh structure part (C)(3a-3d). The burst strengths burst strengths A, B and C of the parts (A, B and C) satisfy the relationship: A > B > C. The non-mesh structure part (A)(1a-1d) is disposed in a part surrounding the tiptoe, a part connecting to a shoe sole and disposed in both sides of the foot for example, in a stripe. The mesh structure part (B)(2) is disposed in the vicinity of the surface of the toe and the mesh structure part (C)(3a-3d) is disposed in the both sides of the foot for example, in a stripe. Thus, a shoe having lightweight, air permeability and durability and a double raschel knitted fabric used for the shoe are provided.

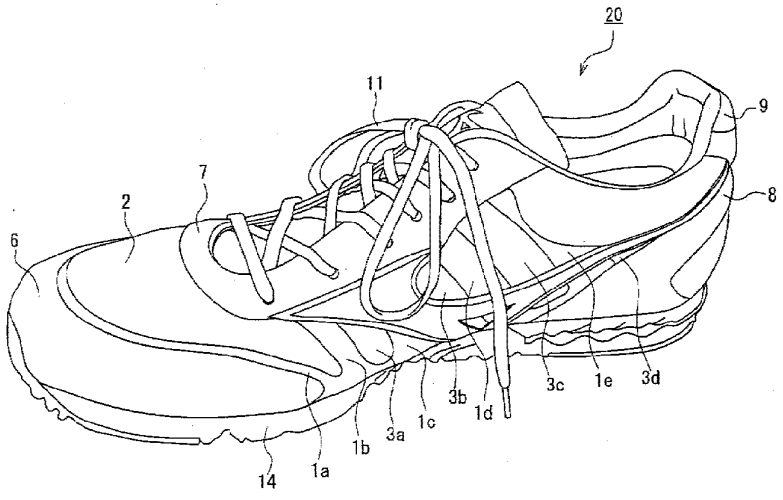


FIG. 2

EP 1 437 057 A1

Description

[0001] The present invention relates to shoes. More particularly, the present invention relates to shoes incorporating a double raschel warp knitted fabric.

[0002] Conventionally, a warp knitted fabric, a woven fabric, a mesh material, and the like, have been used for shoes (see, for example, application for utility model registration No. 2548713, JP 5(1993)-176804A). In particular, in sport shoes, properties such as lightweight and air permeability are required. A warp knitted fabric having a mesh structure is preferred with respect to the above-mentioned properties, but, on the other hand, it does not have a satisfactory strength and needs reinforcement as a whole. At the present, in most cases, such reinforcement is carried out by using artificial leather, leather, a resin sheet, resin, a woven fabric, and the like, from the side of the front surface. Therefore, in general, the usual weight of one sport shoe is about 150 g to 500 g.

[0003] However, the weight of the conventional sport shoe is heavy for use in marathon, running, and indoor sports such as badminton, ping-pong, etc. Therefore, there is a demand for shoes having lighter weight.

[0004] With the foregoing in mind, in order to solve the above-mentioned conventional problem, it is an object of the present invention to provide a shoe having lightweight and air permeability and also having high durability. This object is solved by the above independent claim 1. The invention also provides a double raschel warp knitted fabric of independent claim 10 and a use of this double raschel warp knitted fabric for a shoe according to independent claim 14. Further advantageous features and aspects of the invention are evident from the dependant claims, the description and the drawings.

[0005] According to one aspect of the present invention a shoe is provided which includes an upper material using a double raschel warp knitted fabric. The upper material includes a first surface having a non-mesh structure and a second surface having a non-mesh structure part (A) and mesh structure parts (B, C); the burst strengths A, B and C of the parts (A, B and C) satisfy the relationship: A > B > C; the non-mesh structure part (A) is disposed in a part surrounding the tiptoe and partially in both sides of the foot; the mesh structure part (B) is disposed in the vicinity of the surface of the toe; and the mesh structure part (C) is disposed partially in the both sides of the foot.

[0006] According to another aspect of the invention a shoe is provided including an upper material using a double raschel warp knitted fabric. The upper material includes a front surface including a mesh structure part and a back surface having a non-mesh structure; and a constituent yarn of the front surface includes a yarn having a melting point that is lower than the melting point of a constituent yarn of the back surface, and at least a part of the front surface is partially fused.

[0007] Another aspect of the present invention relates to a double raschel warp knitted fabric adapted for use with a shoe. The warp knitted fabric includes one surface having a non-mesh structure and another surface having a non-mesh structure part (A) and mesh structure parts (B, C); the burst strengths A, B and C of the parts (A, B and C) satisfy the relationship: A > B > C; the non-mesh structure part (A) is disposed in a part surrounding the tiptoe and partially in both sides of the foot; the mesh structure part (B) is disposed in the vicinity of the front surface of the toe; the mesh structure part (C) is disposed partially in the both sides of the foot; and at least the parts A to C are disposed in one continuous knitted fabric.

[0008] Figure 1 is a plan view showing a shoe pattern using a double raschel warp knitted fabric according to Embodiment 1 of the present invention.

[0009] Figure 2 is a side view showing a sport shoe according to Embodiment 2 of the present invention.

[0010] Figure 3 is a perspective view showing the shoe shown in Figure 2 when a tongue part is taken out of the shoe.

[0011] Figure 4 is a side view showing the shoe of Figure 2 seen from the opposite side.

[0012] Figure 5 is a plan view showing a shoe pattern using a double raschel warp knitted fabric according to Embodiment 3 of the present invention.

[0013] The present invention relates to a shoe including an upper material using a double raschel warp knitted fabric. The double raschel warp knitted fabric is a three-layer warp knitted fabric including a base fabric for a front surface, a base fabric for a back surface and a connecting yarn connecting the front surface to the back surface. This warp knitted fabric is knitted by using a warp knitting machine with a double needle line so that the base fabric for a first surface is knitted as a derivative weave that is jacquard-controlled so as to include a non-mesh structure part (A) and mesh structure parts (B, C) and the base fabric for a second surface is knitted as a homogeneous non-mesh structure. The second surface may be formed of one weave and may be formed with different weave mixed. A warp knitting machine for knitting this knitted fabric is commercially available from KARL MAYER Textilmaschinenfabrik GmbH in Germany (NIPPON MAYER LTD. (a Japan corporation) is included).

[0014] When the surface including the non-mesh structure part (A) and mesh structure parts (B, C) of the knitted fabric is used for the front surface of a shoe, the shoe has an excellent appearance and furthermore, a surface area is increased, thus improving air permeability. On the contrary, when the second surface having a non-mesh structure is used for the front surface of the shoe, water can easily be prevented from entering the shoe from the surface.

[0015] The burst strengths A, B and C of the parts (A, B and C) of the double raschel warp knitted fabric satisfy the relationship: A > B > C. The non-mesh structure part (A) is disposed in a part that requires a high strength,

Skechers EX1013-p. 377
Skechers v Nike

that is, a part surrounding the tiptoe (i.e., a tiptoe region of the shoe) and a part connecting to a shoe sole, and also to parts that face the sides of the foot (i.e., side regions of the shoe), the non-mesh structure part (A) is disposed in a stripe. Furthermore, to a part that may have moderate strength and air permeability, that is, a part in the vicinity of the surface of the toe (i.e., a toe region of the shoe), the mesh structure part (B) is placed. Furthermore, to a part that needs air permeability, that is, the side surfaces of the foot (both sides), the mesh structure part (C) is placed, for example, in a stripe. Thus, as a whole, in the shoe, air permeability and durability are balanced.

[0016] The burst strength according to the bursting test based on the JIS L 1096 A of the non-mesh structure part (A) is preferably about 1400 kPa to 1550 kPa with respect to shoes such as marathon shoes, in which lightweight is particularly required. With respect to general shoes for running or jogging, the burst strength is preferably about 1600 kPa. Furthermore, with respect to shoes for a heavy use, for example, shoes for indoor sports such as badminton, ping-pong, etc., the burst strength is preferably about 2400 kPa.

[0017] It is preferable that the burst strength of the mesh structure part (C) is in the range from 900 kPa to 1000 kPa. The mesh structure part (B) may have any burst strength between the burst strength of (A) and that of (C).

[0018] It is preferable that a tiptoe region, a heel region and an eyelet part of the sport shoe are reinforced. Among the above-mentioned parts, the heel part may not be reinforced in the case where lightweight is particularly important.

[0019] It is preferable that a tongue part of the sport shoe includes the mesh structure part (C). It is further preferable that the tongue part may include a mesh structure part (D) having a burst strength that is lower than that of the part (C).

[0020] The double raschel warp knitted fabric may have a property of being stretchable in the width direction of the foot and not stretchable in longitudinal direction of the foot. Thus, the effect of allowing a size of a shoe to be stable and preventing the tiptoe part from stretching when the toe touches to the part at the time of wearing. On the contrary, a property of not being stretchable in the width direction of the foot and stretchable in the longitudinal direction of the foot may be provided. Thus, fitness can be provided in the direction of the width. Furthermore, when a shoe is manufactured by a process called a lasting method, in particular, the manufacturing process of the side part can be carried out easily.

[0021] At least the parts A to C of the double raschel warp knitted fabrics of the present invention are disposed as one continuous knitted fabric. Thus, when the fabrics are cut together with paper pattern, a shoe can be formed, thus enabling the efficiency in the formation to be improved.

[0022] Then, on another surface of the upper material (corresponding to an instep cover) of the present invention, a fiber with a low melting point is used and at least a part thereof is fused. Since the fused part is reinforced by fixing knit stitches, in the case of reinforcing a part with which the calx is brought into contact or a part with which the both sides of the foot are brought into contact, by heating only these parts from the outside, the knit stitch can be reinforced. In this case, it is important that only outside of the upper material is fused. The inner surface side of the upper material is not preferably fused in order to maintain a flexible state because this side covers the foot. An example of the fiber with a low melting point includes, for example, an ethylene vinyl alcohol fiber yarn but is not limited thereto. It is preferable to use fibers whose melting point is 150°C to 200°C. The fiber with a low melting point may be used for an entire surface of the front surface of the double raschel warp knitted fabric. The fiber with a low melting point can be produced by mixing together with a fiber with 20 wt.% or more of high melting point material such as polyester. In the case of polyethylene terephthalate, the melting point is 260°C.

[0023] A constituent yarn of the back surface of the double raschel warp knitted fabric and a connecting yarn connecting the front surface to the back surface are preferably a polyester fiber yarn, and more preferably a polyethylene terephthalate fiber yarn. The other configuration of the present invention may be the same as that of the basic invention mentioned above.

[0024] The present invention can provide a shoe having lightweight and air permeability and further having high durability, and a double raschel warp knitted fabric used therefor.

Example

[0025] Hereinafter, the present invention will be explained in more detail by way of Examples. Note here that the present invention is not limited to the following Examples.

(Example 1)

[0026] Figure 1 shows a double raschel warp knitted fabric (thin melon-net fabric and back-woven half-net) used for a sport shoe according to one Example of the present invention. Shoe patterns 10 matched to paper patterns are placed continuously on one knitted fabric as shown in Figure 1. In the shoe patterns 10, a non-mesh structure part (A) 1a to 1e are disposed in a part surrounding the tiptoe and a part connecting to the shoe sole and stripe-shaped parts on the side surface of the foot (both sides). That is to say, 1a denotes a part surrounding the tiptoe and connected to the shoe sole; 1b to 1e denote stripe-shaped parts arranged on both surfaces of the foot (both sides); and 1f to 1g denote parts folded in the shoe sole. A cut 13 at the tip is a part that

Skechers EX1013-p. 378
Skechers v Nike

becomes circular shape at the site of the tiptoe when folded into the shoe sole. A constituent yarn of a front surface and a back surface of this double raschel warp knitted fabric was a multifilament fiber yarn of polyethylene terephthalate (total diameter of fibers: 84 dtex and number of filaments: 24) and a connecting yarn connecting the front surface to the back surface was a monofilament fiber yarn made of polyethylene terephthalate (total diameter of fibers: 33 dtex and number of filament: 1). Gauge of a knitting machine was 24 gauges, and the weight per unit area of an entire knitted fabric was 258.4 g/m^2.

[0027] To a part that may have a moderate strength and air permeability, that is, a part in the vicinity of the surface of the toe, a mesh structure part (B) 2 was placed.

[0028] To a part that needs air permeability, that is, the side surfaces of the foot (both sides), mesh structure parts (C) 3a to 3d were placed in a stripe.

[0029] A tongue part 12 was formed of a mesh structure part (C) 4 and a mesh structure part (D) 5 with higher air permeability.

[0030] The back surface was formed of the same weave as that of the non-mesh structure part (A) of the front surface.

[0031] This double raschel warp knitted fabric had a structure that is stretchable in the X direction and not stretchable in the Y direction.

[0032] When the bursting test was carried out in accordance with JIS L 1096 A method, the burst strength of the non-mesh structure part (A) was 1600 kPa; the burst strength of the mesh structure part (B) was 1500 kPa; the burst strength of the mesh structure part (C) was 1000 kPa; and the burst strength of the mesh structure part (D) was 930 kPa. When the air permeability test was carried out in accordance with the JIS L 1096 A method ("Frazil method"), air permeability of the non-mesh structure part (A) was 240 cm^3/cm^2/s; air permeability of the mesh structure part (B) was 255 cm^3/cm^2/s; air permeability of the mesh structure part (C) was 278 cm^3/cm^2/s; and air permeability of the mesh structure part (D) was 340 cm^3/cm^2/s. The thickness of this knitted fabric was 5 mm. Furthermore, the weight of double raschel warp knitted fabric used for one shoe was 20 g (in the case of 26.0 cm-shoe).

(Example 2)

[0033] Sport shoes were formed by using the warp knitted fabrics obtained in Embodiment 1. Figure 2 is a side view showing a shoe for a right foot. References numerals given to elements except for the elements of the shoe pattern in Figure 1 will be mentioned below. Reference numeral 6 denotes a reinforcing cloth (artificial leather) for a tiptoe part; 7 denotes a reinforcing cloth (artificial leather) for reinforcing eyelets for shoelace 11; 8 denotes a leather part for reinforcing the calx; 9 denotes a cushion part for covering the tarsus; and 14 denotes a shoe sole part formed of synthetic elastomer (EVA resin). Figure 3 is a perspective view showing the shoe of Figure 2 when the tongue portion is taken out of the shoe. Figure 4 is a side view showing the shoe of Figure 2 seen from the opposite side.

[0034] The weight of a 26-cm shoe was 133.1 g, which was significantly lighter as compared with the weight of about 150 g to 200 g of one of the conventional sport shoes of the same kind. This reduction in weight can be achieved by reducing the upper material by minimizing the amount of reinforcing materials as possible and by disposing a part requiring a satisfactory strength and a part requiring air permeability on one continuous warp knitted fabric so as to reduce sewing parts.

[0035] A test in terms of feeling of wearing, air permeability and durability was carried out by actually wearing the formed 26-cm shoes for one month. As a result, it was confirmed that the feeling of wearing, air permeability and durability were good and that the shoes had excellent functional properties as sport shoes. In particular, the shoes were suitable as shoes to be worn in long-distance running such as marathon.

(Example 3)

[0036] Figure 5 shows double raschel warp knitted fabric (thin melon-net fabric and back-woven half-net) used for sport shoes according to one Example of the present invention. A constituent yarn of a front surface of the double raschel warp knitted fabric is a multi-filament yarn made of ethylene vinyl alcohol (total diameter of fibers: 84 dtex, number of filaments: 24, amount of yarns: 78.76 g/m^2, and total ratio: 30.4%), and a constituent yarn of the back surface of the double raschel warp knitted fabric is a multi-filament yarn made of polyethylene terephthalate (total diameter of fibers: 84 dtex, number of filaments: 24, amount of yarns: 94.52 g/m^2, and total ratio: 36.5%); and a connecting yarn connecting the front surface to the back surface is a monofilament fiber yarn made of polyethylene terephthalate (total diameter of fibers: 33 dtex, number of filament: 1, amount of yarns: 85.73 g/m^2, and total ratio: 33.1%). Gauge of a knitting machine was 24 gauges, and the weight per unit area was 259.0 g/m^2. The thickness of this knitted fabric was 5 mm.

[0037] In Figure 5, reference numeral 30 denotes a shoe pattern on knitted fabric. On one knitted fabric, respective parts are placed continuously. For reducing the excess parts so as to increase the yield, the arrangement is changed from that shown in Figure 1. Reference numeral 31 denotes a part for covering the anterior side of the foot and 32 denotes a part for covering the posterior side of the foot. The configuration is different from that shown in Figure 1 in that two parts are combined into one continuous part. Reference numeral 33 denotes a tongue part; and 34 denotes a part to be attached to the posterior side face of the calx. The burst strength of each part is substantially the same as that

Skechers EX1013-p. 379
Skechers v Nike

in Example 1. The number of meshes (the number of holes per inch (25.4 mm)) is described below. In the below explanation, X direction denotes a width direction and Y direction denotes a longitudinal direction in Figure 5.

(1) a part 31a1 located above the toe, stripe parts 31a2 and 32a1 of the side part of the foot, a part 32a2 for covering the calx, and a part through which a shoelace passes in a tongue part 33c: 5.5 meshes in the lateral direction and 3 meshes in the longitudinal direction
(2) a tip part 31b of the toe, a side part 32b1 of the foot and a stripe part 32b2, and a part 34 to be attached to the side face of the posterior side of the calx: 11 meshes in the lateral direction and 6 meshes in the longitudinal direction
(3) an anterior side 31c1 folded into a shoe sole and a stripe part 31c2, a reinforcing part 32c1 of a side part of the calx and an edge part 32c2: 12 meshes in the lateral direction and 12 meshes in the longitudinal direction
(4) a central part 33a of the tongue part: 5 meshes in the lateral direction and 2 meshes in the longitudinal direction.
(5) a part 33b except for a central part and a part through which a shoelace passes: 6 meshes in the lateral direction and 3.5 meshes in the longitudinal direction.

[0038] This double raschel warp knitted fabric has a structure that is not stretchable in the X direction and the Y direction.

[0039] A shoe that is the same as that shown in Figures 2 to 4 is formed by using the shoe patterns 30 of a knitted fabric. Thereafter, side parts of the foot corresponding to the parts 1c and 1d of Figure 2 are fused and processed by heating thereof at 170°C. As a result, in the heated part, knit stitch structure became rigid, and thus reinforcement can be carried out.

[0040] The weight of one of the obtained 26-cm shoes was 133 g. A test in terms of feeling of wearing, air permeability and durability was carried out by actually wearing the formed 26-cm shoes for one month. As a result, it was confirmed that the feeling of wearing, air permeability and durability were good and that the shoes had excellent functional properties as sport shoes. In particular, the shoes were suitable as shoes to be worn in long-distance running such as marathon.

Claims

1. A shoe (20) comprising:

   an upper material using a double raschel warp knitted fabric;

   the upper material including a first surface having a non-mesh structure and a second surface having a non-mesh structure part (A) (1a to 1d) and mesh structure parts (B) (C) (2) (3a to 3d)

   the non-mesh structure part (A) and the mesh structure parts (B, C) respectively having burst strengths A, B and C that satisfy the relationship: A > B > C;

   the shoe including a tiptoe region, a toe region positioned adjacent to the tiptoe region, a heel region, and two side regions that extend between the heel and toe regions;

   the non-mesh structure part (A) being disposed at the tiptoe region (1a) and partially at both side regions (1b to 1e);

   the mesh structure part (B) (2) being disposed adjacent the toe region; and

   the mesh structure part (C)(3a to 3d) being disposed partially at both side regions.

2. The shoe according to claim 1, wherein in accordance with a bursting test based on JIS L 1096A Method, the burst strength of the non-mesh structure part (A) is 1400 kPa or more and the burst strength of the mesh structure part (C) is 900 kPa to 1200 kPa.

3. The shoe according to claim 1 or 2, wherein the tiptoe region (6), the heel region (8) and an eyelet part (a)(7) of the shoe are reinforced.

4. The shoe according to any one of claims 1 to 3, wherein a tongue part (5) of the shoe comprises the mesh structure part (C).

5. The shoe according to any one of claims 1 to 4, wherein a constituent yarn of the first surface and the second surface, and a connecting yarn connecting the first surface to the second surface are polyester fiber yarns.

6. The shoe according to claim 1, wherein the upper material comprises a front surface having a mesh structure part and a back surface having a non-mesh structure; a constituent yarn of the front surface including a yarn having a melting point that is lower than the melting point of a constituent yarn of the back surface, and at least a part of the front surface is partially fused.

7. The shoe according to claim 6, wherein the constituent yarn of the front surface is an ethylene vinylalcohol fiber yarn.

Skechers EX1013-p. 380
Skechers v Nike

8. The shoe according to claim 6 or 7, wherein the constituent yarn of the back surface and the connecting yarn connecting the front surface to the back surface are polyester fiber yarns.

9. The shoe according to any one of the preceeding claims wherein at least the parts (A) to (C) are disposed in one continous knitted fabric.

10. A double raschel warp knitted fabric including one surface having a non-mesh structure and another surface having a non-mesh structure part (A) and mesh structure parts (B, C);
the non-mesh structure part (A) and the mesh structure parts (B, C) including burst strengths A, B and C satisfy the relationship: A > B > C, and
the parts (A) to (C) being disposed in one continuous knitted fabric.

11. The double raschel warp knitted fabric according to claim 10, wherein a constituent yarn of the first surface and the second surface and a connecting yarn connecting the first surface to the second surface is a polyester fiber yarn.

12. The double raschel warp knitted fabric according to claim 10, wherein the upper material comprises a front surface having a mesh structure part and a back surface having a non-mesh structure; and a constituent yarn of the front surface including a yarn having a melting point that is lower than the melting point of a constituent yarn of the back surface.

13. The double raschel warp knitted fabric according to claim 12, wherein the constituent yarn of the front surface is an ethylene-vinyl alcohol fiber yarn.

14. The double raschel warp knitted fabric according to claim 12 or 13, wherein the constituent yarn of the back surface and the connecting yarn connecting the front surface to the back surface are polyester fiber yarns.

15. Use of a double raschel warp knitted fabric according to any one of claims 10 to 14 for a shoe.

16. Use of a double raschel warp knitted fabric according to claim 15 for a shoe:

the shoe including a tiptoe region, a toe region positioned adjacent to the tiptoe region, a heel region, and two side regions that extend between the heel and toe regions;

the non-mesh structure part (A) being disposed at the tiptoe region and partially at the side regions of the shoe;

the mesh structure part (B) being disposed in the vicinity of the toe region of the shoe;

the mesh structure part (C) being disposed partially at the side regions of the shoe.

Skechers EX1013-p. 381
Skechers v Nike

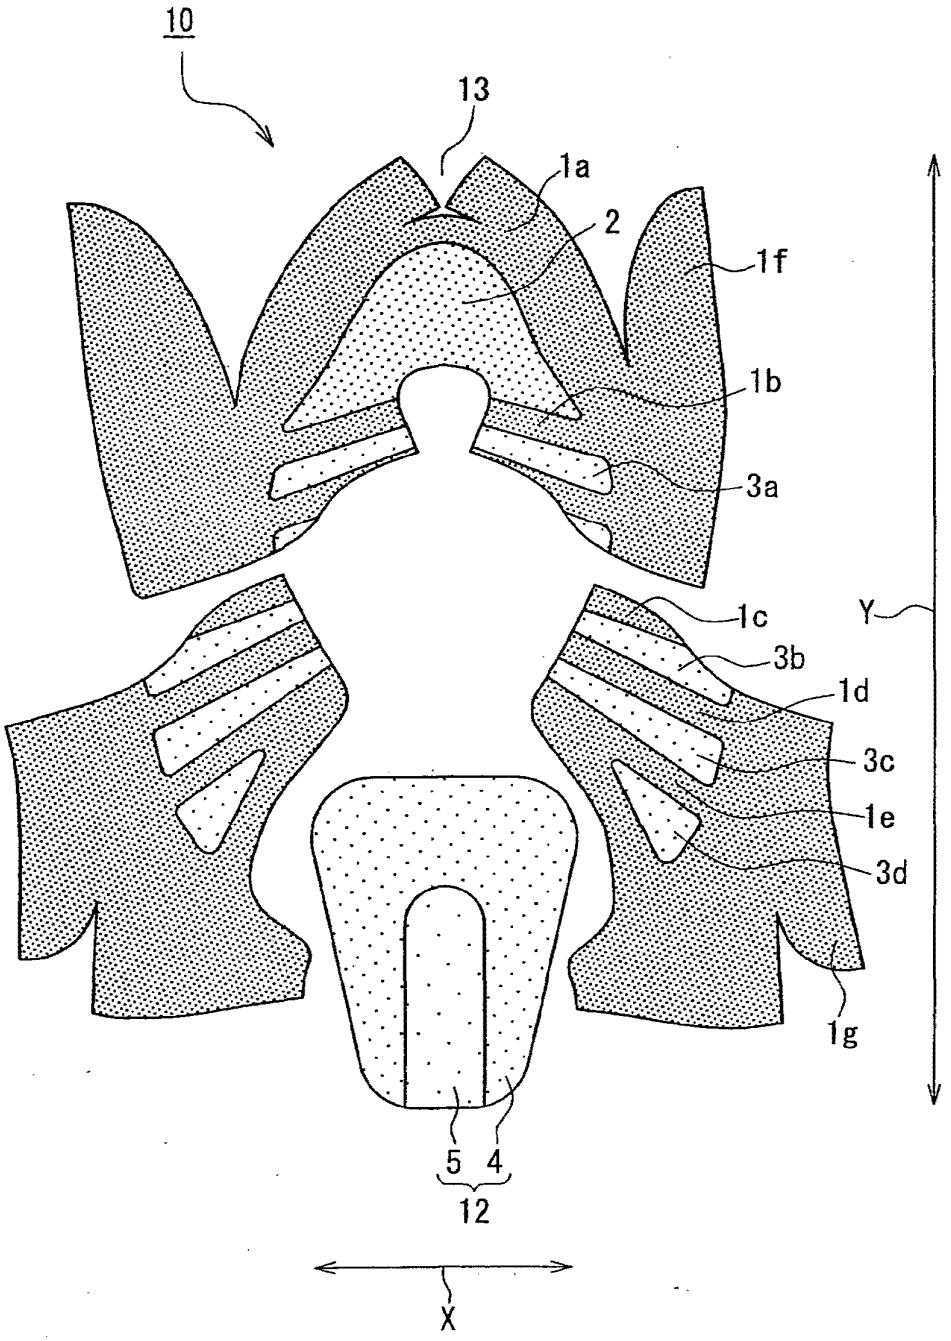


FIG. 1

Skechers EX1013-p. 382
Skechers v Nike

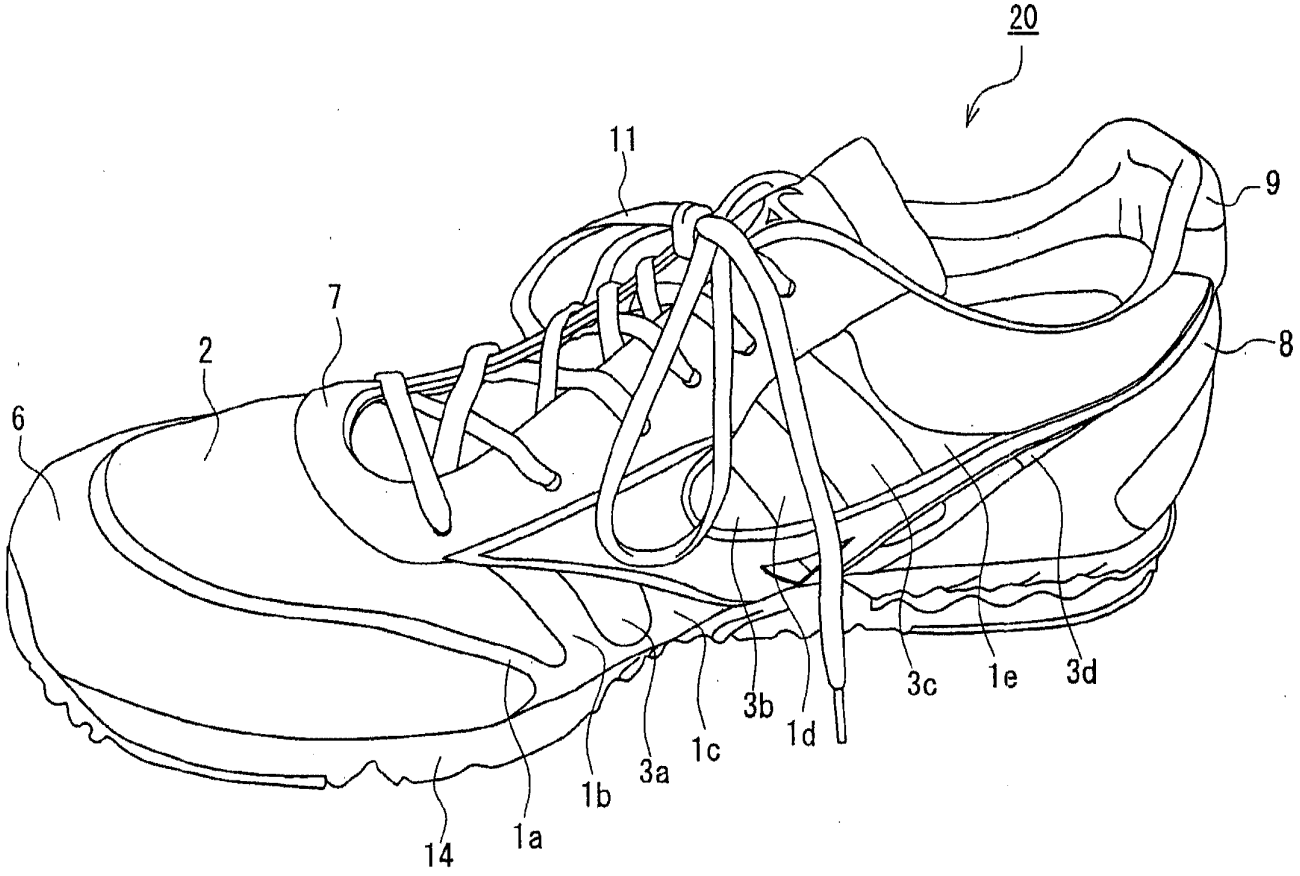


FIG. 2

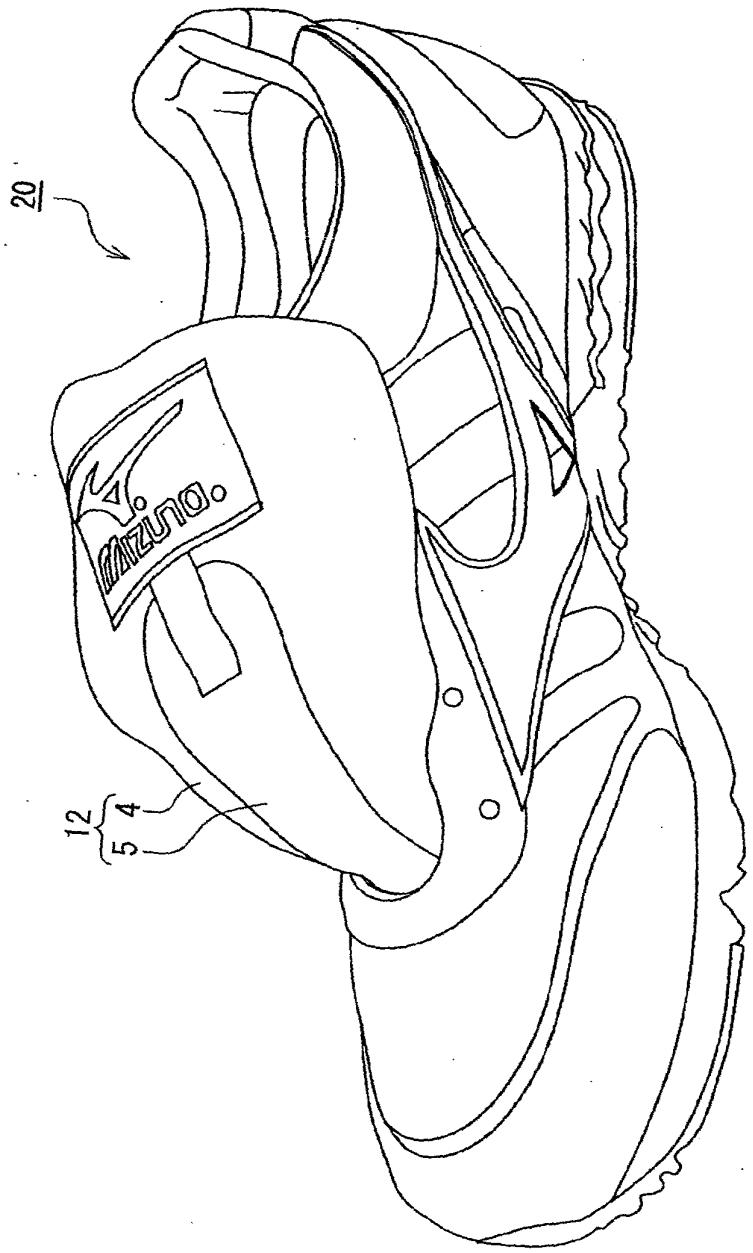


FIG. 3

Skechers EX1013-p. 384
Skechers v Nike

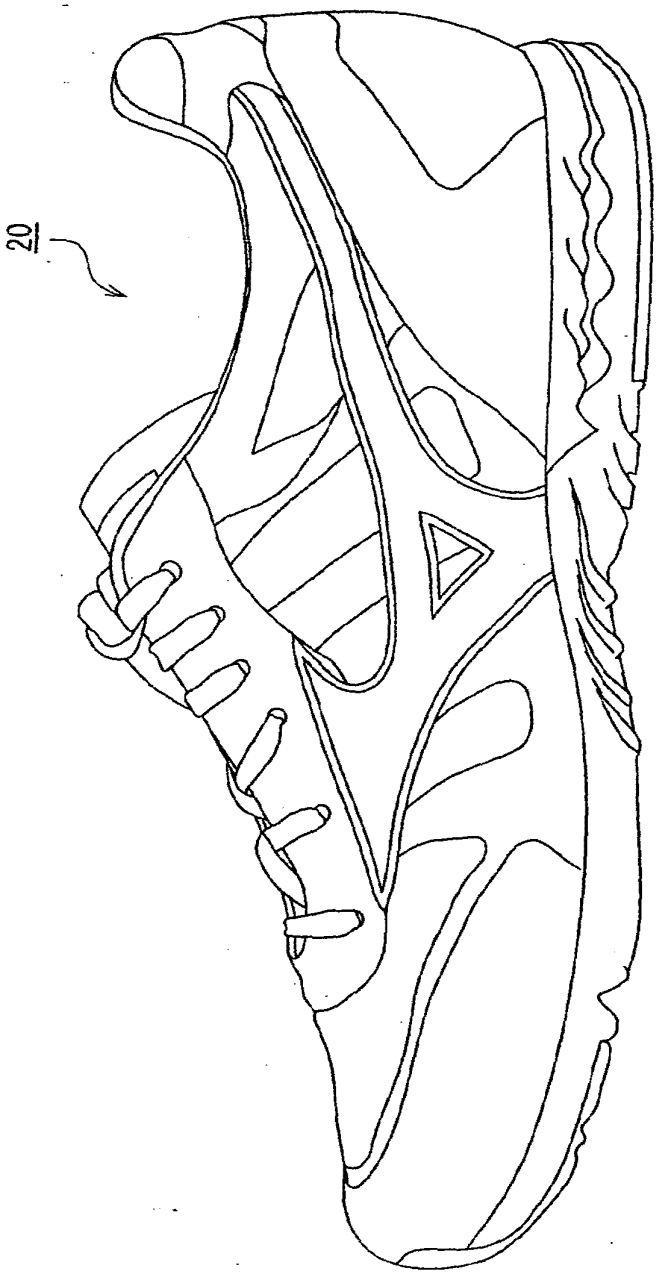


FIG. 4

Skechers EX1013-p. 385
Skechers v Nike

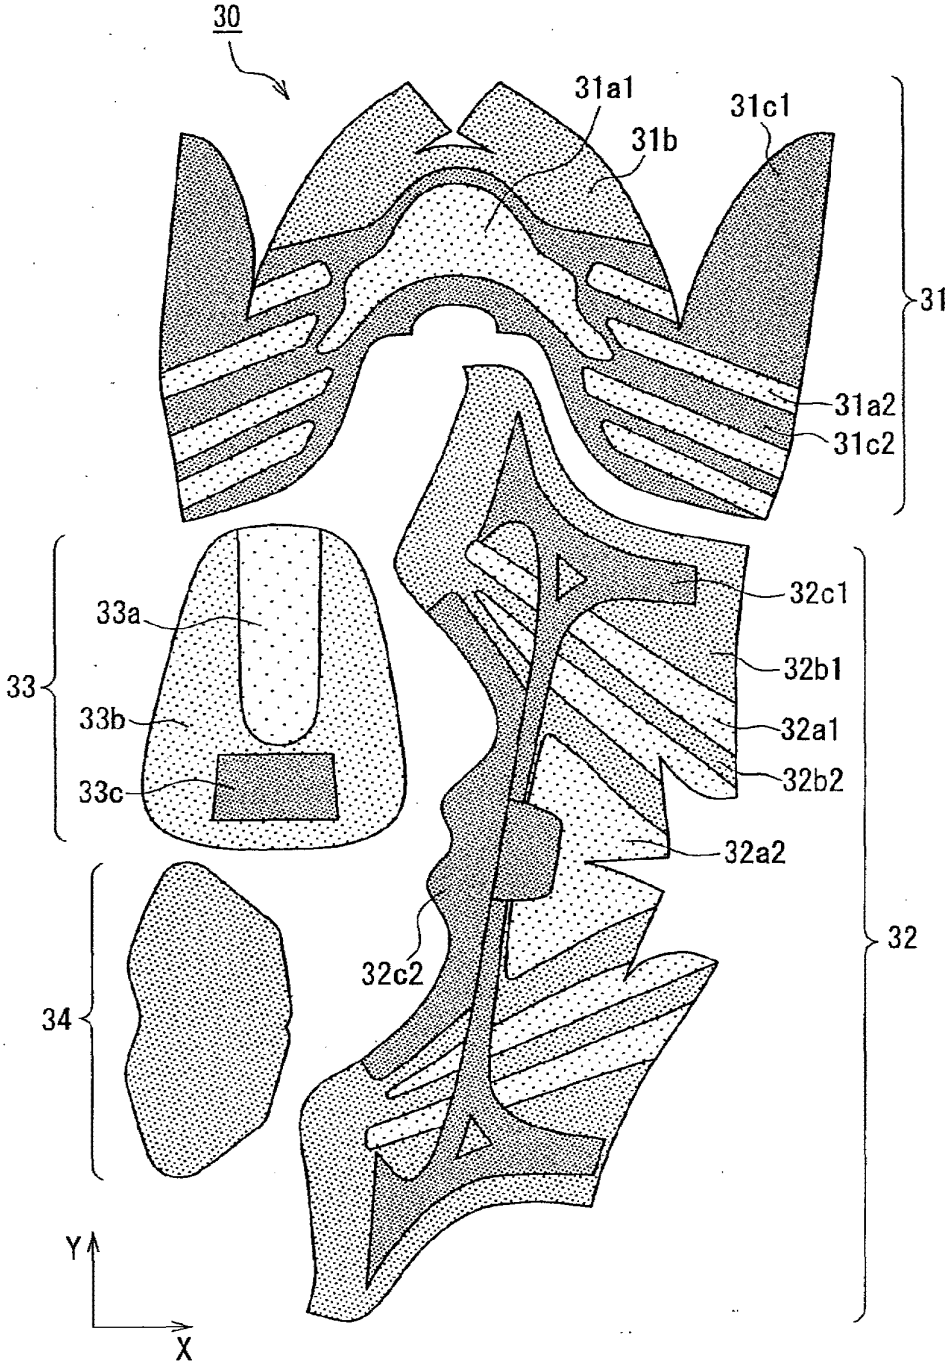


FIG. 5

Skechers EX1013-p. 386
Skechers v Nike

European Patent Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 00 0365

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 06, 30 June 1997 (1997-06-30) & JP 9 047302 A (MIZUNO CORP), 18 February 1997 (1997-02-18) * abstract *	1,10,15, 16	A43B1/00 A43B5/06 A43B7/06 D04B21/02
A	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 07, 3 July 2002 (2002-07-03) & JP 2002 065303 A (TOHO TENAX CO LTD), 5 March 2002 (2002-03-05) * abstract *	1,10,15, 16	
A	FR 2 319 488 A (CITC INDUSTRIES INC) 25 February 1977 (1977-02-25) * the whole document *	1,10,15, 16	
A	US 5 746 013 A (FAY SR WILLIAM L) 5 May 1998 (1998-05-05) * the whole document *	1,10,15, 16	

TECHNICAL FIELDS SEARCHED (Int.Cl.7)

A43B
D04B

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
The Hague	22 April 2004	Cianci, S

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

Skechers EX1013-p. 387
Skechers v Nike

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 04 00 0365

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-04-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 9047302 A	18-02-1997	NONE	
JP 2002065303 A	05-03-2002	NONE	
FR 2319488 A	25-02-1977	DE 2634159 A1	17-02-1977
		DE 7623920 U1	26-01-1978
		FR 2319488 A1	25-02-1977
US 5746013 A	05-05-1998	BR 9602748 A	22-04-1998
		CA 2179108 A1	14-12-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

Skechers EX1013-p. 388
Skechers v Nike

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 563 752 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.08.2005 Bulletin 2005/33

(51) Int Cl.[7]: **A43C 13/14**, A43B 7/32, A43B 23/26

(21) Application number: **04380085.3**

(22) Date of filing: **14.04.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL HR LT LV MK

(30) Priority: **13.02.2004 ES 200400343**

(71) Applicant: **Calzados Robusta, S.L.**
26580 Arnedo (La Rioja) (ES)

(72) Inventors:
- **Hernandez Martinez-Portillo, Luis Miguel**
  26580 Arnedo (La Rioja) (ES)
- **Arechavaleta Garcia, Adelardo**
  26580 Arnedo (La Rioja) (ES)

(74) Representative: **Carpintero Lopez, Francisco**
Herrero & Asociados, S.L.,
Alcalá, 35
28014 Madrid (ES)

(54) Metatarsal protection for safety footwear

(57) It is constituted on the basis of a tongue (1) which is conveniently attached to the boot, which is divided into a number of sectors (3), in which are some receptacles (5) which hold sheets (6) of material resistant to impact and ductile in order to facilitate the adaptation thereof to the form of the boot when closed. The sectors (3) are delimited by some lines of stitching (4) which facilitate the relative inclination between sectors (3) and therefore the articulation of the tongue (1) when the boot is flexed achieving greater user comfort.

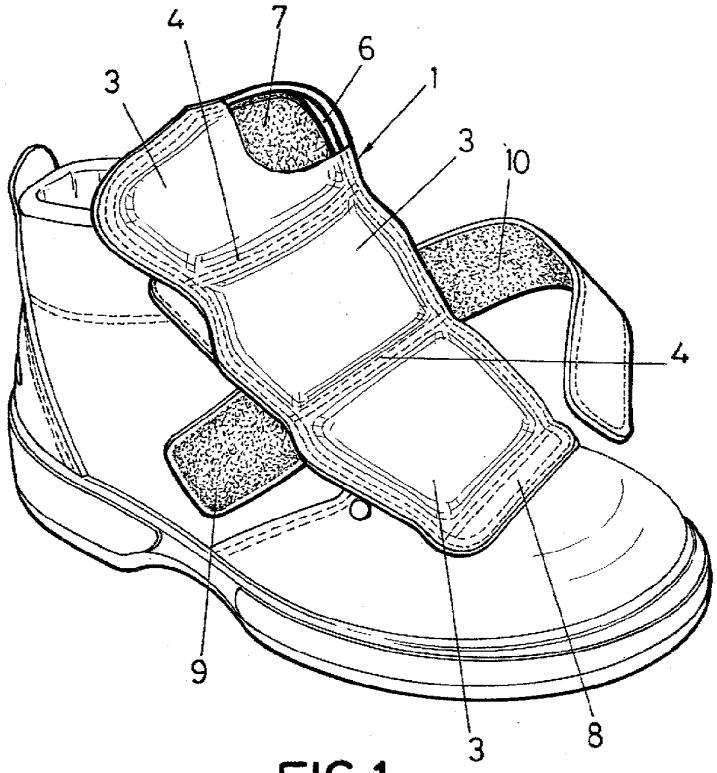


FIG.1

EP 1 563 752 A1

Description

OBJECT OF THE INVENTION

[0001] The present invention is of application for safety footwear employed in industry, of the type of that which incorporates protection to protect the user's feet fundamentally from impacts, as well as additionally from heat and the action of aggressive liquids.

[0002] The object of the invention is a metatarsal protection for safety footwear which is highly resistant to impact, whilst having the capability to adapt its form to the elastic deformation which is produced in the boot when walking or when the foot is flexed in a stationary position, achieving in this way greater comfort in the use of this type of footwear.

BACKGROUND OF THE INVENTION

[0003] Safety boots conventionally incorporate a toecap with metallic reinforcement to avoid injuries which could arise from the impact of an object which fell accidentally on the worker's boot. As a supplement to this reinforcing element it is envisaged, not only to protect the toecap area of the foot, but also to confer an added value to the boot through the incorporation of protection in the area of the instep.

[0004] This protection, usually termed metatarsal, is formed by means of a stiff tongue which reduces movement and articulation capacity, especially in the metatarsal area.

[0005] The protection normally hinges with respect to an emerging flap defined in the toecap of the boot to which it is joined by stitching or by means of rivets and is formed in a single material, which can be plastic or metallic, and also have curved forms which adapt to the shape of the metatarsal sector of the safety boot and in some developments it is envisaged that it be of reduced length without managing to cover the height of the boot with the object of guaranteeing a minimum articulation of the foot.

[0006] This solution however is not completely satisfactory since, by not covering the whole extension of the metatarsal sector there remains an extensive area of the foot, ankle and area where the leg joins the ankle exposed to impacts, and also the discomfort and cutting effect that the stiff tongue has on the user.

[0007] The development of protection for safety footwear in which a compromise is reached between resistance to impact and flexibility, whilst guaranteeing the protection of the whole metatarsal area makes the invention feasible which is disclosed below.

DESCRIPTION OF THE INVENTION

[0008] The metatarsal protection which constitutes the object of this invention fully covers the expressed expectations in the measure that it offers effective protection for the whole metatarsal area whilst providing flexibility for its adaptation to the movement of the boot resulting therefore in substantial comfort for the user.

[0009] The metatarsal protection fundamentally comprises a tongue formed by individual layers of leather or of appropriate material, which is divided into sectors in which receptacles are defined which hold sheets of impact-resistant material and at the same time offer a certain ductility to allow a certain deformation of the tongue and thereby good adaptation to the morphology of the boot, when worn on the foot and closed. These sectors are delimited by lines of stitching sewn transversally which facilitate the articulation of the tongue when the boot is flexed eliminating in this way the stiffness which usually accompanies other systems of protection.

[0010] The sheet of impact-resistant and ductile material (for example aluminium) can be clad with a padded material, like latex foam for example, which constitutes a covering which prevents the cutting effect of the sheet, whilst increasing comfort.

[0011] The tongue is secured by stitching to the toecap of the boot and could even be reinforced by means of rivets.

[0012] The protection so constituted guarantees the absorption of impacts by means of the sheets of resistant material which are located in different sectors of the tongue, preferably parallel and separated by a short distance. This separating gap facilitates articulation between said sectors, allowing the tongue to adapt to the form of the instep of the boot when flexed.

[0013] The incorporation of this protection does not constitute any impediment whatsoever for the adoption of any boot closing system, be it by means of a Velcro strip, laces or any other solution.

DESCRIPTION OF THE DRAWINGS

[0014] To complete the description that is being made and with the object of assisting in a better understanding of the characteristics of the invention, in accordance with a preferred example of practical embodiment thereof, accompanying said description as an integral part thereof, is a set of drawings wherein, by way of illustration and not restrictively, the following has been represented:

Figure 1. - It shows a view in perspective of an open boot in which the metatarsal protection is appreciated with a section in which one can observe the resistant sheet and the padded material inside one of the sectors.

Figure 2. - It shows a side view of a longitudinal section of the protection.

Figure 3. - It shows a side view of the flexed boot in which one can observe how the protection articulates to adapt to the form of the boot.

Skechers EX1013-p. 390
Skechers v Nike

PREFERRED EMBODIMENT OF THE INVENTION

[0015] Taking the figures represented as reference a preferred mode of embodiment is described of the metatarsal protection for safety footwear which constitutes the object of this invention.

[0016] The metatarsal protection is constituted on the basis of a tongue (1) which is conveniently attached to the boot, be this by stitching, rivets, a combination of both or any other means.

[0017] The tongue (1) is formed by two layers of leather or of appropriate material (2-2') between which are defined a number of sectors (3), delimited by lines of stitching (4) which allow articulation of the boot, in which some receptacles (5) are to be found which hold sheets (6) of impact-resistant and ductile material, to facilitate the adaptation thereof to the form of the boot when worn and closed.

[0018] The resistant sheets (6) are clad with padding (7) inside the receptacles (5).

[0019] The sectors (3) of the tongue (1) can be extended transversally thereto in a parallel arrangement and separated at a short distance by the transversal lines of stitching (4) which facilitate the relative inclination between sectors (3) and therefore the articulation of the tongue (1) when the boot is flexed.

[0020] Furthermore the tongue (1) comes with a flap (8) which constitutes the connecting element with the boot, to which it is conveniently articulated.

[0021] As can be appreciated in figure 1 the boot can have a Velcro strip (9) to which adhere the band (10) which can previously enwrap the tongue (1) to establish the closing of the boot, although as has been indicated above, the form of closing can be by laces, buckles or of any other nature.

Claims

1. Metatarsal protection for safety footwear which is constituted on the basis of a tongue (1) fitted with resistant elements which is conveniently attached to the boot, be this by stitching, rivets, a combination of both or other means, **characterised in that** the tongue is divided into a number of sectors (3), in which are receptacles (5) which hold sheets (6) of material, resistant to impact, and having a certain ductility to facilitate the adaptation thereof to the form of the boot when closed, the sectors (3) being delimited by some lines of stitching (4) which facilitate the relative inclination between sectors (3) and therefore the articulation of the tongue (1) and its adaptation to the form of the boot.

2. Metatarsal protection for safety footwear according to claim 1 **characterised in that** the resistant sheets (6) are clad with padding (7) inside the receptacles (5).

3. Metatarsal protection for safety footwear according to claim 1 **characterised in that** the sectors (3) of the tongue (1) are extended transversally thereto in a parallel arrangement and separated by a short distance to facilitate their articulation.

Skechers EX1013-p. 391
Skechers v Nike

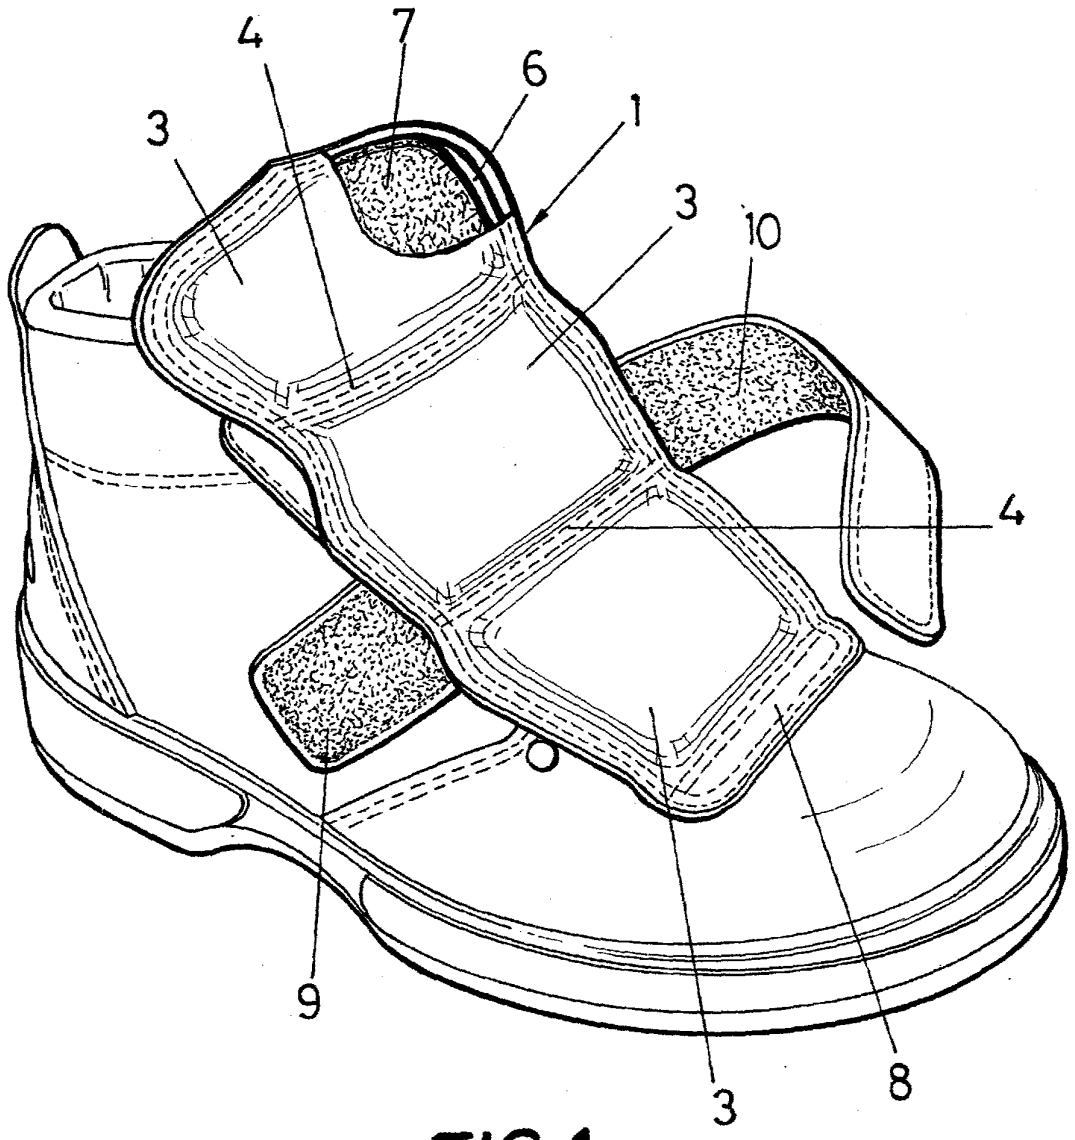


FIG.1

Skechers EX1013-p. 392
Skechers v Nike

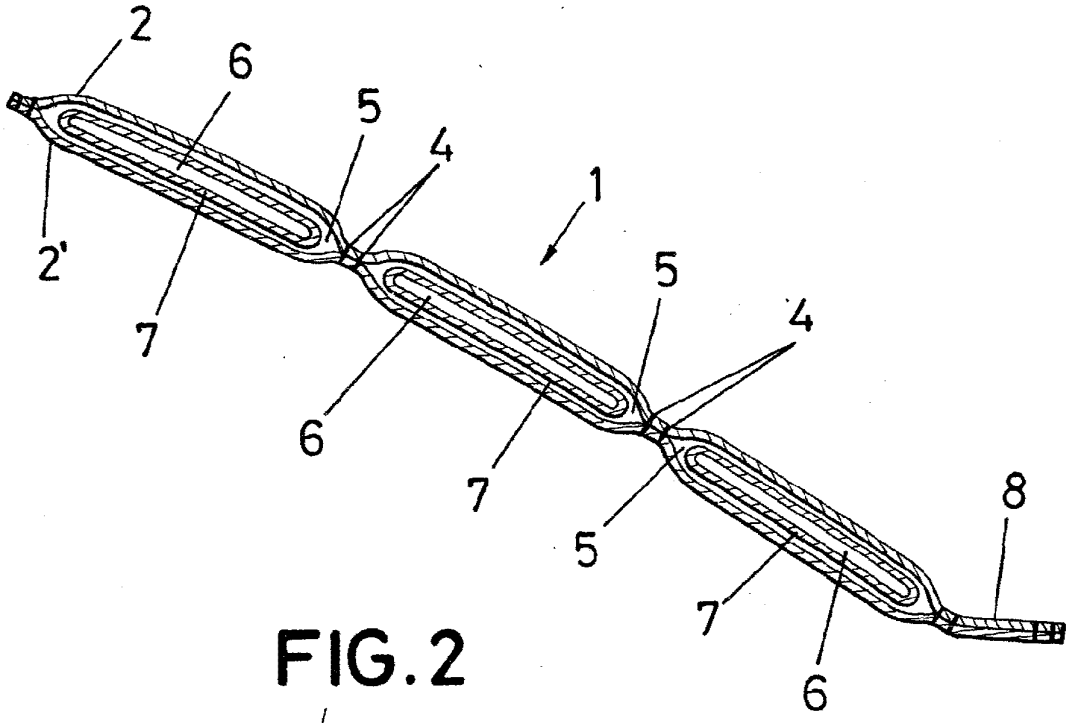


FIG. 2

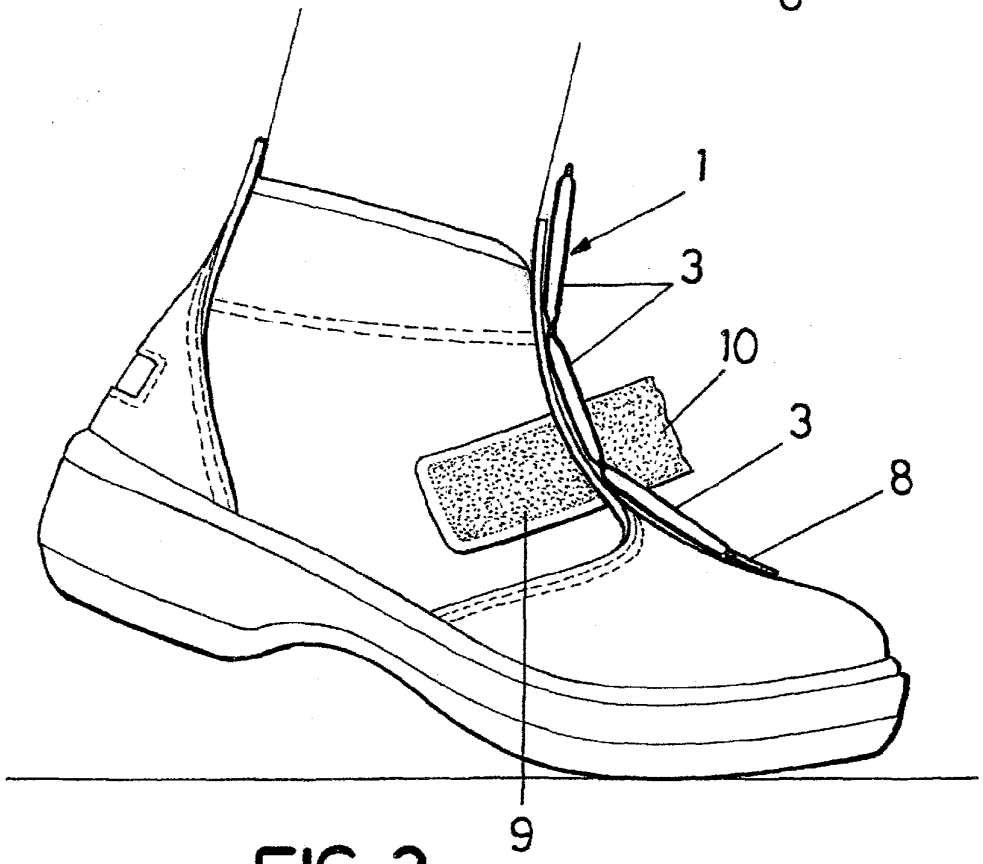


FIG. 3

Skechers EX1013-p. 393
Skechers v Nike

European Patent Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 38 0085

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 14 85 771 A1 (RIDDERMANN,PAUL) 11 June 1970 (1970-06-11) * column 3; figure 4 *	1,2	A43C13/14 A43B7/32 A43B23/26
Y	DE 195 41 253 A1 (LUPOS SCHUHFABRIK GMBH, 41836 HUECKELHOVEN, DE; WILHELM KAECHELE GMBH,) 7 May 1997 (1997-05-07) * page 4, line 29; figures *	1-3	
Y	FR 2 313 880 A (NORET ET FILS P) 7 January 1977 (1977-01-07) * page 2; figures *	1-3	
Y	FR 2 475 864 A (ADIDAS FABRIQUE CHAUSSURES SPORT) 21 August 1981 (1981-08-21) * claims; figures *	1-3	
Y	WO 00/64292 A (NORMAC AGENCIES PTY LTD; MACLEOD, NORMAN, WILLIAM) 2 November 2000 (2000-11-02) * claims; figures *	1-3	
A	US 3 995 382 A (SMITH ET AL) 7 December 1976 (1976-12-07) * columns -; figures *	2	TECHNICAL FIELDS SEARCHED (Int.Cl.7) A43C A43B

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
The Hague	28 April 2005	Claudel, B

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

Skechers EX1013-p. 394
Skechers v Nike

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 04 38 0085

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-04-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1485771 A1	11-06-1970	NONE	
DE 19541253 A1	07-05-1997	AT 189582 T	15-02-2000
		AU 1765497 A	29-05-1997
		WO 9716991 A2	15-05-1997
		DE 59604438 D1	16-03-2000
		EP 0862372 A2	09-09-1998
		ZA 9609333 A	11-06-1998
FR 2313880 A	07-01-1977	FR 2313880 A1	07-01-1977
FR 2475864 A	21-08-1981	FR 2475864 A2	21-08-1981
WO 0064292 A	02-11-2000	WO 0064292 A1	02-11-2000
		DE 10081296 T0	16-08-2001
US 3995382 A	07-12-1976	AT 360869 B	10-02-1981
		AT 231076 A	15-06-1980
		BE 840673 A1	12-10-1976
		CA 1050753 A1	20-03-1979
		CH 611781 A5	29-06-1979
		DE 2609782 A1	28-04-1977
		DE 7607177 U1	31-05-1979
		DK 100976 A	23-04-1977
		ES 231874 Y	16-05-1978
		FR 2328416 A1	20-05-1977
		GB 1524744 A	13-09-1978
		IT 1056927 B	20-02-1982
		JP 1007385 C	31-07-1980
		JP 52054549 A	04-05-1977
		JP 54040981 B	06-12-1979
		LU 74974 A1	19-01-1977
		NL 7602636 A	26-04-1977
		NO 760727 A	25-04-1977
		SE 7602815 A	23-04-1977

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

Skechers EX1013-p. 395
Skechers v Nike

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 602 762 A1

(12) EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
07.12.2005 Bulletin 2005/49

(21) Application number: **04714438.1**

(22) Date of filing: **25.02.2004**

(51) Int Cl.[7]: **D04B 15/56**

(86) International application number:
PCT/JP2004/002194

(87) International publication number:
WO 2004/076732 (10.09.2004 Gazette 2004/37)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(30) Priority: **26.02.2003 JP 2003049795**

(71) Applicant: **SHIMA SEIKI MANUFACTURING LIMITED**
Wakayama-shi, Wakayama 641-8511 (JP)


(72) Inventors:
- **OKUNO, Masao,**
Shima Seiki Manufacturing Limited
Wakayama-shi, Wakayama 641-8511 (JP)
- **NAKAMORI, Toshinori,**
Shima Seiki Manufacturing Ltd
Wakayama-shi, Wakayama 641-8511 (JP)

(74) Representative: **Graefe, Jörg et al**
Fritz Patent- und Rechtsanwälte
Ostentor 9
59757 Arnsberg (DE)

(54) YARN CARRIER OF WEFT KNITTING MACHINE

(57) When bringing pins (2) are engaged with the yarn carrier at the engagement portions (3a, 3b) near the center of the yarn carrier, the yarn carrier, as a normal carrier, feeds the yarn so that the yarn is applied to a knitting needle performing knitting operation by a carriage. When the bringing pins (2) are engaged with the yarn carrier at the engagement points (4a, 4b) near the rear side thereof in the travel direction, the yarn carrier, as an inlay carrier, feeds the yarn in preference to the knitting operation so that the yarn is not applied to the knitting needle performing the knitting operation by the carriage. When the projection portions (6a, 6b) of engagement releasing members (5a, 5b) are pressed by the contact thereof with the stopper, the engagement releasing members (5a, 5b) are moved backward, and slope portions (7a, 8a; 7b, 8b) push up the bringing pins (2) engaged with the yarn carrier at the engagement points (3a, 4a; 3b, 4b) so as to release the engagement.

FIG. 1

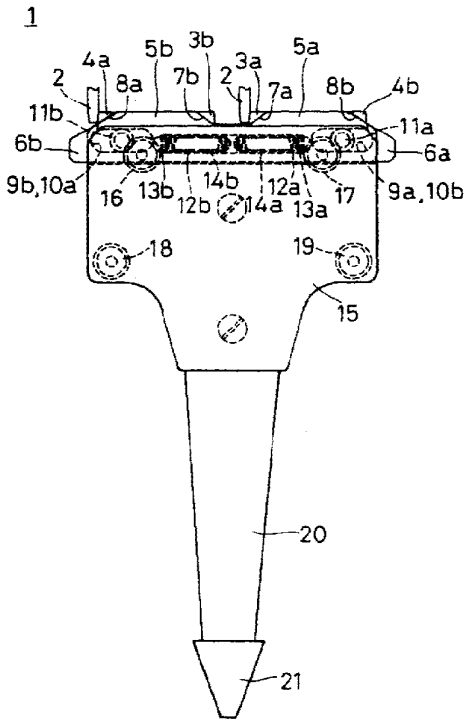

EP 1 602 762 A1

Description

Technical Field

[0001] The present invention relates to a yarn carrier, in a weft knitting machine, that is brought by a carriage and thereby supplies yarn when producing a knitted fabric by travels of the carriage.

Background Art

[0002] Conventionally, in a typical weft knitting machine, a knitted fabric is produced by letting a carriage travel back and forth along the longitudinal direction of a needle bed on which a large number of knitting needles are provided to be juxtaposed to each other. The carriage is provided with a knitting cam for letting the knitting needles perform a knitting operation. To the knitting needles performing a knitting operation, a knitting yarn is supplied from a yarn carrier that is brought by the carriage. In a weft knitting machine that is provided with at least the front and the rear needle beds, yarn guide rails are installed above a needle bed gap in which the front ends of the knitting needles proceeding from the front and the rear needle beds are opposed to each other, so as to face the needle bed gap, and yarn carriers suspended from the yarn guide rails travel along the yarn guide rails. Carriages are provided at the front and the rear needle beds and linked to each other by a bridge straddling the yarn guide rails. Pins for letting the carriages bring the yarn carriers can project and withdraw at the bridge and are engaged with the yarn carriers in the projecting state. An engagement position of the pin and the yarn carrier is normally set to be a position in which a knitting yarn is supplied from the yarn carrier at a timing at which the front ends of the knitting needles recede from the needle bed gap after proceeding thereinto when the knitting needles are led to perform a knitting operation by the knitting cam.

[0003] When a yarn carrier for supplying a knitting yarn at a normal timing and a yarn carrier for supplying a knitting yarn prior to the normal timing so as not to be hooked on knitting needles are used in combination, it is possible to perform inlay knitting (see Japanese Unexamined Patent Publication JP-A 55-148256, for example). According to JP-A 55-148256, a yarn feeding-member corresponding to a yarn carrier for inlay knitting shown in FIGS. 5 to 9 has a shape different from that of a yarn feeding member for knitting a normal knitted fabric shown in FIG. 4. The shapes are different because the yarn feeding members supply knitting yarns at different timings by being engaged with pins at different positions with respect to a yarn feeding position. The positions of the front ends of the yarn feeding members for supplying knitting yarns at the needle bed gap are also different between the yarn feeding member for normal knitting and the yarn feeding member for inlay knitting.

[0004] In the yarn carrier brought by the carriage, by lifting the pin, engagement can be released and a travel thereof can be halted, so that it is possible to produce a knitted fabric, changing knitting yarns by changing yarn carriers in the middle of the course in which the knitted fabric is produced. When the carriage travels to the end portion of the knitting width and the yarn carrier abuts against a stopper that has been provided on the yarn guide rail, the pin is pushed up by, for example, a slope, and thus engagement with the pin can be mechanically released. In JP-A 55-148256, a configuration is shown in which with respect to the yarn feeding member for normal knitting shown in FIG. 4, the front end of the pin that has been engaged with an engagement point runs over a slope provided at a stopper and thus the engagement is released. With respect to the yarn feeding member for inlay knitting shown in FIGS. 5 to 9, a configuration is disclosed in which a switching component provided at the yarn feeding member can be displaced relatively back and forth, and when the front end of the switching component abuts against a stopper, the switching component recedes and a slope formed at the switching component pushes up the front end of the pin from the engagement point and thus the engagement is released.

[0005] The yarn feeding member for inlay knitting disclosed in JP-A 55-148256 is only for inlay knitting, and thus a timing at which a knitting yarn is supplied so as not to be hooked at a position where the knitting needles perform a knitting operation by the action of the knitting cam mounted on the carriage, and a position in which a knitting yarn is supplied at the needle bed gap are different from those of the yarn feeding member for normal knitting. This method by which the yarn feeding member for normal knitting and the yarn feeding member for inlay knitting are used in combination to produce a knitted fabric enables an inlay knitted fabric to be produced effectively when the knitting width is substantially constant. However, when the knitting width changes, it is impossible to produce a good inlay knitted fabric. More specifically, in the case where the knitting width changes, a better knitted fabric can be produced when the end portions are tucked and hooked on the knitting needles also in the course of inlay knitting. However, in the yarn feeding member only for inlay knitting, a timing at which a knitting yarn is supplied with respect to a knitting operation of knitting needles led by the knitting cam is different from that of the yarn feeding member for normal knitting, and thus it is impossible to supply a knitting yarn for a knitting operation of the knitting needles included in the knitting timing such as tucking.

Disclosure of Invention

[0006] It is an object of the invention to provide a yarn carrier, in a weft knitting machine, in which a plurality of engagement points are provided so that a knitting yarn can be supplied at a plurality of different timings and in

Skechers EX1013-p. 397
Skechers v Nike

which engagement with a pin can be released when the yarn carrier abuts against a stopper or the like.

[0007] The invention is directed to a yarn carrier, in a weft knitting machine, that yarn carrier is used for supplying a knitting yarn to knitting needles provided to be juxtaposed to each other in needle beds of the weft knitting machine, that can travel along a yarn guide rail parallel with a longitudinal direction of the needle beds, and that can be engaged with a pin projecting from a carriage and is brought by the carriage when engaged with the pin,

wherein engagement with the pin is possible at a plurality of points that are spaced apart in a travel direction, and

the yarn carrier comprises an engagement releasing member that has a projection portion and a plurality of slope portions, which projection portion is capable of projecting to a front side in a travel direction in which the yarn carrier is brought by the carriage, and is displaceable so that the engagement with the pin at any of the plurality of points can be released at the plurality of slope portions when the projection portion is pressed from the front side and recedes.

[0008] In addition, the invention is characterized in that the plurality of points engaged with the pin include:

an engagement point for a normal carrier in which a knitting yarn can be supplied so as to be hooked on knitting needles performing a knitting operation, and

an engagement point for an inlay carrier in which a knitting yarn can be supplied so as not to be hooked on knitting needles performing a knitting operation.

[0009] In addition, the invention is characterized in that the engagement releasing members are provided so that the front sides thereof, with respect to back-and-forth travels of the carriage, are paired to be on one side and the other side of the yarn guide rail.

[0010] In addition, the invention is characterized in that the yarn carrier further comprises a spring that biases the projection portion of the engagement releasing member so as to project to the front side.

Brief Description of Drawings

[0011] Other and further objects, features, and advantages of the invention will be more explicit from the following detailed description taken with reference to the drawings wherein:

FIG. 1 is a front view showing a schematic configuration of a yarn carrier 1 according to an embodiment of the invention;

FIG. 2 is a front view showing a state in which the yarn carrier 1 in FIG. 1 travels along a yarn guide rail 22 and is halted abutting against a stopper 23;

FIG. 3 is a right side cross-sectional view showing a configuration in which the yarn carriers 1 in FIG. 1 are attached to the plurality of yarn guide rails 22 and displaceably supported by rollers 16, 17, 18, and 19;

FIG. 4 is a front view showing components that constitute a main unit 15 of the yarn carrier 1 in FIG. 1;

FIG. 5 is a view showing the relative positional relationship among engagement releasing members 5a and 5b and a spacer 31 in the yarn carrier 1 in FIG. 1; and

FIG. 6 is a view showing a sock 40 as an example of a knitted fabric that can be preferably produced using the yarn carrier 1 in FIG. 1.

Best Mode for Carrying out the Invention

[0012] Now referring to the drawings, preferred embodiments of the invention are described below.

[0013] FIG. 1 shows a schematic configuration of a yarn carrier 1 according to an embodiment of the invention. The yarn carrier 1 of this embodiment can travel back and forth along the longitudinal direction of needle beds of a weft knitting machine, and has a plurality of engagement points 3a, 3b; 4a, 4b that can be engaged with a bringing pin 2 projecting and withdrawing at, for example, a bridge portion of a carriage (not shown). The yarn carrier 1 is brought by the carriage to travel back and forth to the left or the right in the drawing, and has the engagement points 3a and 4a used in a travel to the right and the engagement points 3b and 4b used in a travel to the left at symmetrical positions with respect to the center. When the bringing pin 2 is engaged with the engagement points 3a and 3b, which are close to the center, the yarn carrier 1 functions as a normal carrier and supplies a knitting yarn so as to be hooked on the knitting needles performing a knitting operation led by the carriage. When the bringing pin 2 is engaged with the engagement points 4a and 4b, which are close to the rear sides with respect to the travel directions, the yarn carrier 1 functions as an inlay carrier and supplies a knitting yarn prior to a knitting operation so as not to be hooked on the knitting needles performing a knitting operation led by the carriage. With the engagement points 3a, 3b; 4a, 4b that are engaged with the bringing pin 2, it is possible to switch between functions of a normal carrier and an inlay carrier, and thus it is possible to easily perform knitting in which both ends of an inlay knitted fabric are tucked on the knitting needles.

[0014] In order to release engagement of the bringing pin 2 that is engaged with each of the engagement points 3a, 3b; 4a, 4b, engagement releasing members 5a and 5b are provided. The engagement releasing members 5a and 5b are provided in such a manner that with respect to back-and-forth travels of the carriage, the engagement releasing member 5a that operates during a travel to the right in the drawing is paired with the engagement releasing member 5b that operates during a travel to the left. The engagement releasing

Skechers EX1013-p. 398
Skechers v Nike

member 5a has a projection portion 6a that projects to the right on the yarn carrier 1 in the drawing and slope portions 7a and 8a that release engagement of the bringing pin 2 at the engagement points 3a and 4a. The engagement releasing member 5b has a projection portion 6b that projects to the left on the yarn carrier 1 in the drawing and slope portions 7b and 8b that release engagement of the bringing pin 2 at the engagement points 3b and 4b.

[0015] These engagement releasing members 5a and 5b are formed by a metal plate or other materials, and are provided with pairs of elongated holes 9a, 10a; 9b, 10b that are spaced apart in the horizontal direction of the drawing. The elongated hole 9a of the engagement releasing member 5a and the elongated hole 10b of the engagement releasing member 5b are arranged at positions where one overlaps the other, and a supporting pin 11a is inserted into the holes. Furthermore, the elongated hole 9b of the engagement releasing member 5b and the elongated hole 10a of the engagement releasing member 5a are arranged at positions where one overlaps the other, and a supporting pin 11b is inserted into the holes. The engagement releasing members 5a and 5b can be displaced with relative to the yarn carrier 1 within a range in which the both ends of the elongated holes 9a, 10a; 9b, 10b do not abut against the supporting pins 11a and 11b. At positions between the pairs of the elongated holes 9a, 10a; 9b, 10b of the engagement releasing members 5a and 5b, elongated holes 12a and 12b are provided. At the elongated hole 12a of the engagement releasing member 5a, a spring receiving portion 13a is formed by partial bending on the right side in the drawing. At the elongated hole 12b of the engagement releasing member 5b, a spring receiving portion 13b is formed by partial bending on the left side in the drawing. The front ends of the spring receiving portions 13a and 13b are inserted into an elongated hole of a spacer (described later), and receive one ends of coil springs 14a and 14b.

[0016] A main unit 15 of the yarn carrier 1 that has the engagement points 3a, 3b; 4a, 4b for the bringing pin 2 and that is provided with the displaceable engagement releasing members 5a and 5b, is provided with rollers 16, 17, 18, and 19, and can be supported in such a manner that the main unit 15 can run on a yarn guide rail 22 (described later). An arm 20 is extended from the main unit 15, and the front end of the arm 20 is provided with a yarn feeding port 21 for supplying a knitting yarn to a needle bed gap.

[0017] FIG. 2 shows a state in which the yarn carrier 1 of this embodiment travels along the yarn guide rail 22 and is halted abutting against a stopper 23. For example, when the bringing pin 2 is engaged with any of the engagement points 3b and 4b and lets the yarn carrier 1 travel to the left in the drawing, the projection portion 6b of the engagement releasing member 5b abuts against the right side face of the stopper 23. When the bringing pin 2 is intended to further travel to the left, the projection portion 6b is pressed down and the engagement releasing member 5b is displaced to the right with relative to the main unit 15. With this relative displacement, the slope portion 7b or 8b pushes up the front end of the bringing pin 2 that is engaged with the engagement point 3b or 4b and releases the bringing pin 2 from the engagement point 3b or 4b. The bringing pin 2 is biased by a spring to project downwards, and thus when pushed up by the slope portion 7b or 8b with a force that is greater than the spring bias, the bringing pin 2 is pushed up from the engagement point 3b or 4b resisting the spring bias. The bringing pin 2 continues to travel to the left even after pushed up from the engagement point 3b or 4b, and thus the bringing pin 2 is parted from the engagement point 3b or 4b and thus the engagement is released. Also, in the case where the yarn carrier 1 abuts against the stopper 23 on the right side, the engagement releasing member 5a performs an operation to release the engagement of the bringing pin 2 in a similar manner.

[0018] Furthermore, a magnet is attached to the yarn carrier 1. Even after engagement of the bringing pin 2 at the engagement points 3a, 3b; 4a, 4b is released, a sliding friction on the yarn guide rail 22 deriving from the magnetic attraction of the magnet is set to be greater than the bias of the coil springs 14a and 14b, and thus the yarn carrier 1 holds the current position. Therefore, the bringing pin 2 that was engaged with the engagement points 4a and 4b for an inlay carrier and whose engagement is released reaches the engagement points 3a and 3b for a normal carrier when the carriage continues to travel. However, since the engagement points 3a and 3b are closed with the slope portions 7a and 7b of the engagement releasing members 5a and 5b, the bringing pin 2 is not engaged with the engagement point 3a or 3b.

[0019] It should be noted that a plurality of yarn carriers 1 can be arranged in the longitudinal direction of one yarn guide rail 22. One of the plurality of yarn carriers 1 is selected by letting the bringing pin 2 project and be engaged with the engagement point 3a, 3b, 4a, or 4b. As for the knitting cam provided at the carriage, a plurality of sets can be provided so that a plurality of knitting operations can be performed in one travel. Each of the plurality of knitting cams brings the yarn carrier 1 to let a knitting yarn be supplied. Therefore, the stopper 23 provided on the yarn guide rail 22 is to halt travels of the plurality of yarn carriers 1. As for the yarn carrier 1 of this embodiment, when between the stopper 23 and the yarn carrier 1 engaged with the bringing pin 2, there is another yarn carrier 1, the yarn carrier 1 on the frontmost abuts against the stopper 23 and is halted first. Subsequently, the yarn carrier 1 abuts against its preceding yarn carrier 1 and is halted sequentially, and engagement with the bringing pin 2 can be released by, instead of abutting against the stopper 23, abutting against the preceding yarn carrier 1, and the travel thereof can be thus halted.

Skechers EX1013-p. 399
Skechers v Nike

[0020] FIG. 3 shows a cross-sectional configuration in which the plurality of yarn carriers 1 are attached to the plurality of yarn guide rails 22 and displaceably supported by the rollers 16, 17, 18, and 19. Although the arm 20 and the yarn feeding port 21 are shown only for one yarn carrier 1, also in other yarn carriers 1, the yarn feeding port 21 provided at the front end of the arm 20 faces the needle bed gap 24 and supplies a knitting yarn in a basically similar manner. A position for supplying a knitting yarn is a position in which knitting needles 25 and 26 proceed from the front and the rear needle beds and can catch a knitting yarn with the hooks thereof. When the bringing pin 2 is engaged with the engagement points 3a and 3b for a normal carrier, a knitting yarn is supplied from the yarn feeding port 21 at a timing at which the knitting needles 25 and 26 recede from the needle bed gap after proceeding thereinto, and thus it is possible to perform knitting by hooking the knitting yarn on the knitting needles 25 and 26. When the bringing pin 2 is engaged with the engagement points 4a and 4b for an inlay carrier, a knitting yarn is supplied from the yarn feeding port 21 prior to a timing at which the knitting needles 25 and 26 proceed into the needle bed gap 24, and thus the knitting yarn goes under the knitting needles 25 and 26, so that it is possible not to hook the knitting yarn on the knitting needles 25 and 26.

[0021] FIG. 4 shows components that constitute the main unit 15 of the yarn carrier 1 in this embodiment. A base 30 is formed by a metal plate or other materials, is formed in one piece with the arm 20, and is disposed on the rear face side in the drawing. To the surface of the base 30, a spacer 31 is attached that is formed, for example, a synthetic resin. On the spacer 31, the elongated holes 32a and 32b for accommodating the coil springs 14a and 14b are formed on positions that are close to the center. On the both sides of the elongated holes 32a and 32b, supporting holes 33a and 33b for letting the supporting pins 11a and 11b shown in FIG. 1 through are provided.

[0022] On the front face side of the spacer 31, the engagement releasing members 5a and 5b are arranged one on top of the other. For example, the engagement releasing member 5a is on the rear face side, and the spring receiving portion 13a is inserted into the elongated hole 32a of the spacer 31 and receives one end of the coil spring 14a. The other end of the coil spring 14a abuts against the end portion of the elongated hole 32a at a position that is close to the center. In this manner, the coil spring 14a biases the engagement releasing member 5a to the right in the drawing. On the front face side of the engagement releasing member 5a, the engagement releasing member 5b is disposed. The spring receiving portion 13b of the engagement releasing member 5b goes into the elongated hole 12a of the engagement releasing member 5a to be inserted into the elongated hole 32b of the spacer 31 and receives one end of the coil spring 14b. The other end of the coil spring 14b abuts against the end portion of the elongated hole 32b at a position that is close to the center. In this manner, the coil spring 14b biases the engagement releasing member 5b to the left in the drawing. The surface of the main unit 15 is covered by a cover 35.

[0023] FIG. 5 shows the relative positional relationship among the engagement releasing members 5a and 5b and the spacer 31. Herein, drawing of the elongated holes 32a and 32b of the spacer 31 has been omitted. FIG. 5(a) shows a state in which the bringing pin 2 is engaged with the engagement point 3a, 4a, 3b, or 4b and can move in connection therewith as shown in FIG. 1, and FIG. 5(b) shows a state in which engagement is released by abutting against, for example, the stopper 23 as shown in FIG. 2. In the state where engagement is possible as shown in FIG. 5 (a), the projection portions 6a and 6b of the engagement releasing members 5a and 5b project and the slope portions 7a, 8a; 7b, 8b are apart from the engagement points 3a, 4a; 3b, 4b, and thus engagement with the bringing pin 2 is possible. In the state where, for example, in a travel to the left, the projection portion 6b of the engagement releasing member 5b, which is one of the engagement releasing members, abuts against the stopper 23 or the side face of another yarn carrier 1, the engagement releasing member 5b moves relatively to the right, and thus the slope portions 7b and 8b cover the engagement points 3b and 4b as shown in FIG. 5(b). When any of the engagement points 3b and 4b is engaged with the bringing pin 2, the front end of the bringing pin 2 is pushed up by the slope portion 7b or 8b, and thus the engagement is released.

[0024] During this travel to the left, since the other engagement releasing member 5a is not displaced, when the amount at which the tail portion of the engagement releasing member 5a projects is set, even in the most receding state, not to project to the right exceeding the front end of the projection portion 6a of the other engagement releasing member 5a, the apparent amount at which the pair of engagement releasing members 5a and 5b projects to the right can be set not to change overall. Although it is possible to form the pair of engagement releasing members 5a and 5b in one piece, in the case where the pair is formed in one piece, when the projection portion 6b abuts against, for example, the stopper 23 and recedes, the other projection portion 6a projects further, and thus it is necessary to provide a mechanism that can return the engagement releasing member to the center position reliably. In this embodiment, the pair of engagement releasing members 5a and 5b are separately formed, and thus an operation to release engagement can be performed reliably and simply.

[0025] Also, the yarn carrier 1 of this embodiment further includes the coil springs 14a and 14b that bias the projection portions 6a and 6b of the engagement releasing members 5a and 5b to project forwards, but it is also possible that the spring bias of, for example, the coil springs 14a and 14b is not applied. In the case where the engagement releasing members 5a and 5b can trav-

Skechers EX1013-p. 400
Skechers v Nike

el smoothly, the engagement releasing members 5a and 5b can be displaced by the bringing pin 2, as long as the projection portion 6a or 6b does not abut against, for example, the stopper 23 or another yarn carrier 1. Even when the slope portion 7a, 8a, 7b, or 8b covers the engagement point 3a, 4a, 3b, or 4b, the front end of the bringing pin 2 presses the slope portion 7a, 8a, 7b, or 8b to let the engagement releasing member 5a or 5b move to the side of the projection portion 6a or 6b, so that the slope portion 7a, 8a, 7b, or 8b does not cover the engagement point 3a, 4a, 3b, or 4b.

[0026] In this embodiment, however, the coil springs 14a and 14b bias the projection portions 6a and 6b of the engagement releasing members 5a and 5b to project forwards. With this configuration, as long as the projection portion 6a or 6b does not abut against, for example, the stopper 23, it is possible to let the projection portions 6a and 6b always project so that the slope portion 7a, 8a, 7b, or 8b does not cover the engagement point 3a, 4a, 3b, or 4b, and thus engagement with the bringing pin 2 can be reliably performed.

[0027] FIG. 6 shows an example of a knitted fabric that can be preferably produced using the yarn carrier 1 of this embodiment. FIG. 6(a) shows a sock 40 as a completed knitted fabric. The sock 40 has a heel portion 41, and is to be produced in three dimensions. FIG. 6 (b) shows a knitted fabric in which the sock 40 in FIG. 6 (a) is cylindrically knitted separately between the front and the rear needle beds of the weft knitting machine. For example, a rear needle bed knitted fabric 43, which is to be produced at the rear needle bed, includes a knitting width changing portion to form the heel portion 41. A front needle bed knitted fabric 45, which is to be produced at the front needle bed, is produced with the substantially constant knitting width. When inlay knitting is performed in the heel portion 41, it is preferable that a knitting yarn is not only simply led through the knitted fabric, but also tucked on the knitting needles at the both sides of the knitting width. The heel portion 41 is knitted by short rows.

[0028] With use of the yarn carrier 1 of this embodiment, the bringing pin 2 can be engaged with the engagement points 3a and 3b to perform tucking at the start of knitting, and then the bringing pin 2 can be engaged with the engagement points 4a and 4b to perform inlay knitting. Switching between the engagement points 3a, 4a; 3b, 4b at the start of knitting is performed by letting the carriage that has once moved recede and then move again.

[0029] It should be noted that the position of the yarn feeding port 21 with respect to the needle bed gap 24 can be changed by applying the configuration for letting the position of a yarn feeding portion of a yarn carrier approach to the front end portion of knitting needles, which has been disclosed by the applicant of the invention in Japanese Unexamined Patent Publication JP-A 11-61606.

[0030] As described above, the yarn carrier 1 in a weft knitting machine in this embodiment is used for supplying a knitting yarn to the knitting needles 25 and 26 that are provided side by side on the needle beds of the weft knitting machine, can travel along the yarn guide rail 22 parallel with the longitudinal direction of the needle beds, and can be engaged with the bringing pin 2 projecting from the carriage. The yarn carrier 1 is brought by the carriage and travels when engaged with the bringing pin 2. The engagement with the bringing pin 2 is possible at the plurality of engagement points 3a, 4a; 3b, 4b that are provided to be spaced apart in the travel direction, and thus it is possible to let timings for supplying a knitting yarn be different, depending on the engagement points 3a, 4a; 3b, 4b. This change of timings for supplying a yarn is useful not only when using functions of a normal carrier and an inlay carrier properly, but also when producing various knitted fabrics and when letting the end of a yarn be drawn into the knitted fabric. The yarn carrier 1 includes the engagement releasingmembers 5a and 5b, and the engagement releasingmembers 5a and 5b have the projection portions 6a and 6b and the plurality of slope portions 7a, 8a; 7b, 8b. The projection portions 6a and 6b of the engagement releasing members 5a and 5b can project to the front sides in the travel directions in which the yarn carrier 1 is brought by the carriage, and can be displaced so that the engagement with the bringing pin 2 can be released at any of the plurality of slope portions 7a, 8a; 7b, 8b when the projection portions 6a and 6b are pressed from the front sides and recede. When, for example, the stopper 23 is provided in the middle of the yarn guide rail 22, the projection portions 6a and 6b of the engagement releasing members 5a and 5b abut against the stopper 23 or so forth, and thus engagement with the bringing pin 2 can be released at the slope portions 7a, 8a; 7b, 8b.

[0031] The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The present embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing description and all changes which come within the meaning and the range of equivalency of the claims are therefore intended to be embraced therein.

Industrial Applicability

[0032] As described above, according to the invention, a yarn carrier in a weft knitting machine is used for supplying a knitting yarn to knitting needles provided to be juxtaposed to each other in needle beds of the weft knitting machine, can travel along a yarn guide rail parallel with the longitudinal direction of the needle beds, and can be engaged with a pin projecting from a carriage, and is brought by the carriage and travels when engaged with the pin. Engagement with the pin is possible at a plurality of points that are spaced apart in the

Skechers EX1013-p. 401
Skechers v Nike

travel direction, and thus it is possible to let timings for supplying a knitting yarn be different, depending on the engagement points. The yarn carrier includes an engagement releasing member, and the engagement releasing member has a projection portion and a plurality of slope portions. The projection portion of the engagement releasing member can project to the front side in the travel direction in which the yarn carrier is brought by the carriage, and the releasing member is displaceable so that the engagement with the pin can be released at any of the plurality of slope portions when the projection portion is pressed from the front side and recedes. When, for example, a stopper is provided in the middle of the yarn guide rail, the projection portion of the engagement releasing member abuts against the stopper or so forth, and thus engagement with the pin can be released at the slope portion.

[0033] Furthermore, according to the invention, the plurality of points engaged with the pin include an engagement point for a normal carrier in which a knitting yarn can be supplied so as to be hooked on knitting needles performing a knitting operation, and an engagement point for an inlay carrier in which a knitting yarn can be supplied so as not to be hooked on knitting needles performing a knitting operation. Thus, the yarn carrier can be used for not only inlay knitting but also normal knitting.

[0034] Furthermore, according to the invention, the engagement releasing members are provided so that the front sides thereof, with respect to back-and-forth travels of the carriage, are paired to be on one side and the other side of the yarn guide rail. Thus, only one side of the engagement releasing member that corresponds to the travel direction of the carriage abuts against, for example, the stopper, to be displaced, and thus the engagement with the pin can be released. The engagement releasing members that project to one sides are provided to be paired with each other. Thus, it is not necessary to let the opposite side of the projection portion project as much as the other projection portion, and when the projection portion abuts against, for example, the stopper and recedes, it is possible to suppress the projection of the opposite side within a range in which the other projection portion projects.

[0035] Furthermore, according to the invention, a spring biases the projection portion of the engagement releasing member so as to project to the front side. Thus, it is possible to let the projection portion project, as long as the projection port ion does not abut against, for example, the stopper, so that engagement with the pin is not released at the slope portion and the bringing pin can be reliably engaged.

Claims

1. A yarn carrier, in a weft knitting machine, that yarn carrier is used for supplying a knitting yarn to knitting needles provided to be juxtaposed to each other in needle beds of the weft knitting machine, that can travel along a yarn guide rail parallel with a longitudinal direction of the needle beds, and that can be engaged with a pin projecting from a carriage, and is brought by the carriage when engaged with the pin,

   wherein engagement with the pin is possible at a plurality of points that are spaced apart in a travel direction, and the yarn carrier comprises an engagement releasing member that has a projection portion and a plurality of slope portions, which projection portion is capable of projecting to a front side in a travel direction in which the yarn carrier is brought by the carriage, and is displaceable so that the engagement with the pin at any of the plurality of points can be released at the plurality of slope portions when the projection portion is pressed from the front side and recedes.

2. The yarn carrier of claim 1, wherein the plurality of points engaged with the pin include:


   an engagement point for a normal carrier in which a knitting yarn can be supplied so as to be hooked on knitting needles performing a knitting operation, and
   an engagement point for an inlay carrier in which a knitting yarn can be supplied so as not to be hooked on knitting needles performing a knitting operation.

3. The yarn carrier of claim 1 or 2, wherein the engagement releasing members are provided so that the front sides thereof, with respect to back-and-forth travels of the carriage, are paired to be on one side and the other side of the yarn guide rail.

4. The yarn carrier of any one of claims 1 to 3, further comprising a spring that biases the projection portion of the engagement releasing member so as to project to the front side.


Skechers EX1013-p. 402
Skechers v Nike

FIG. 1

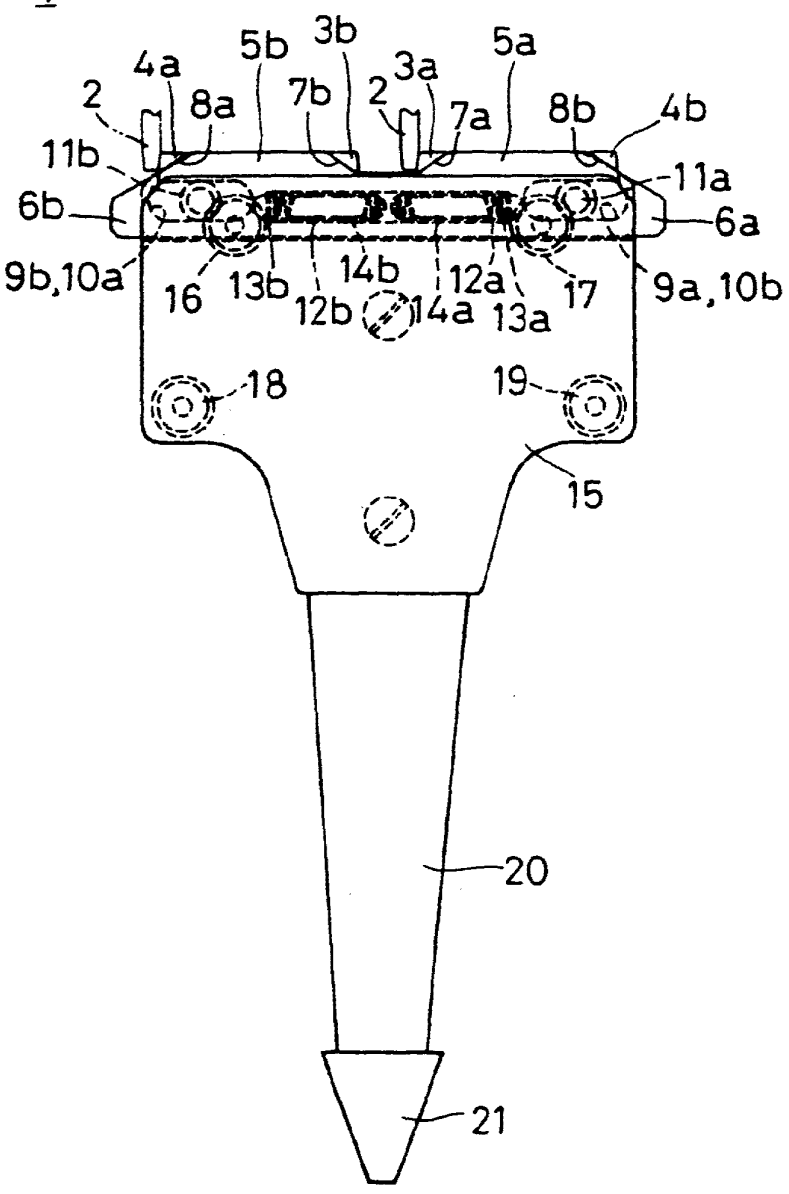


Skechers EX1013-p. 403
Skechers v Nike

FIG. 2

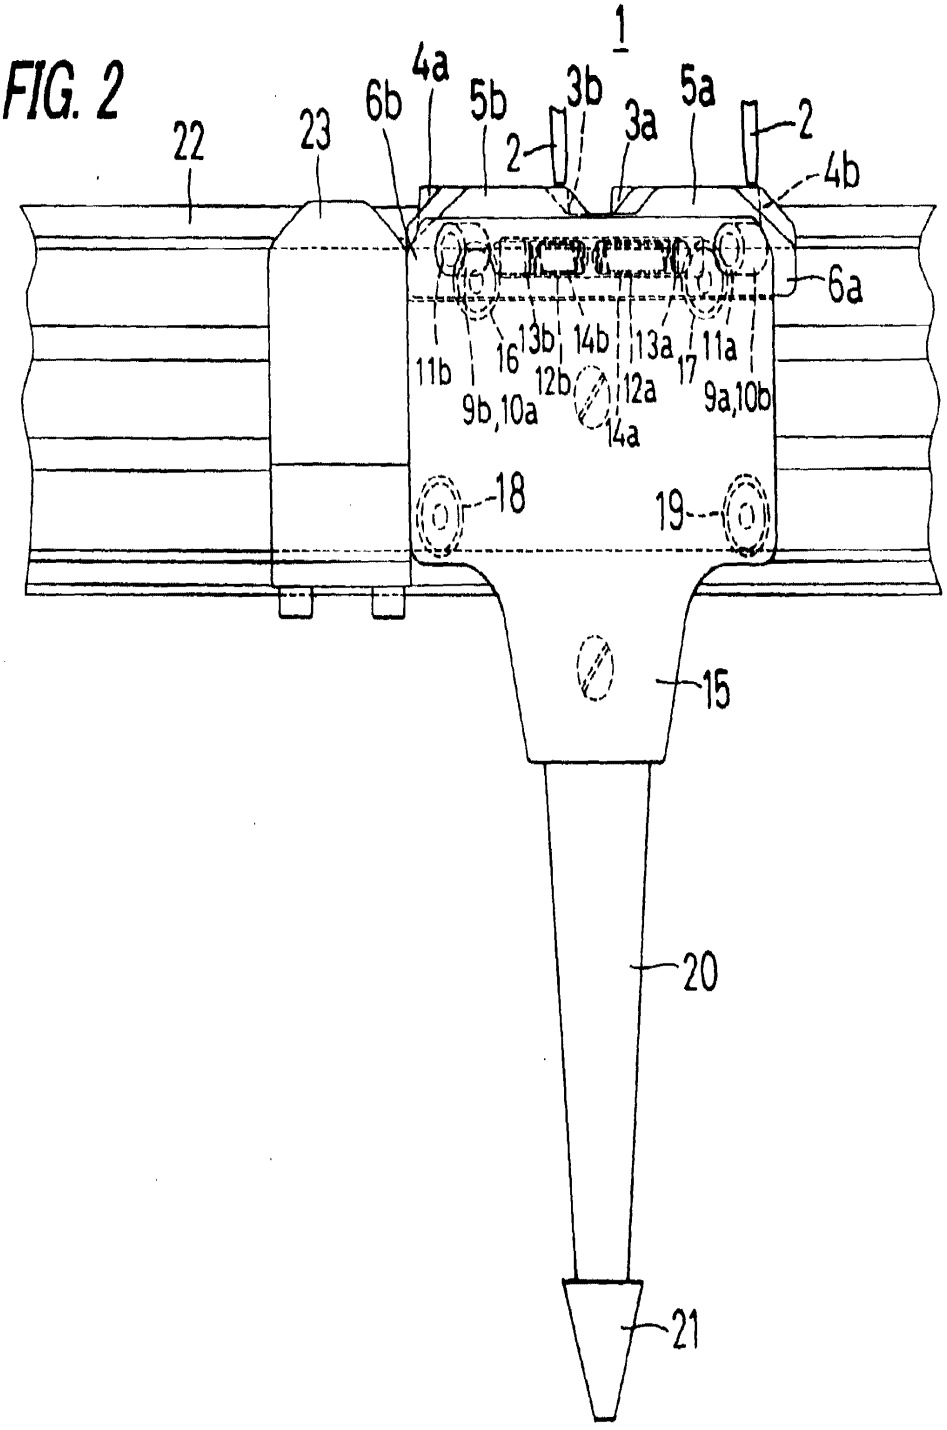


EP 1 602 762 A1

FIG. 3

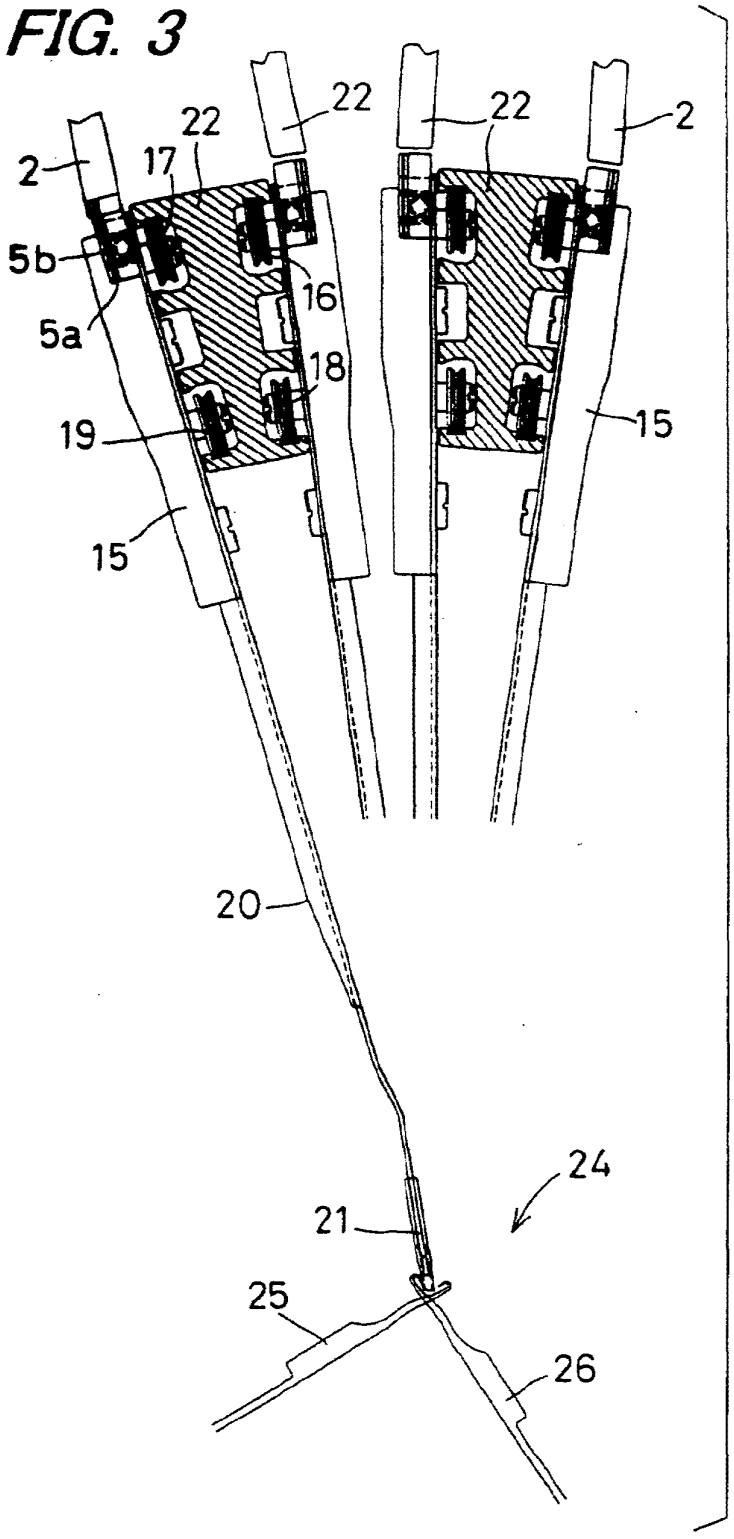


Skechers EX1013-p. 405
Skechers v Nike

FIG. 4

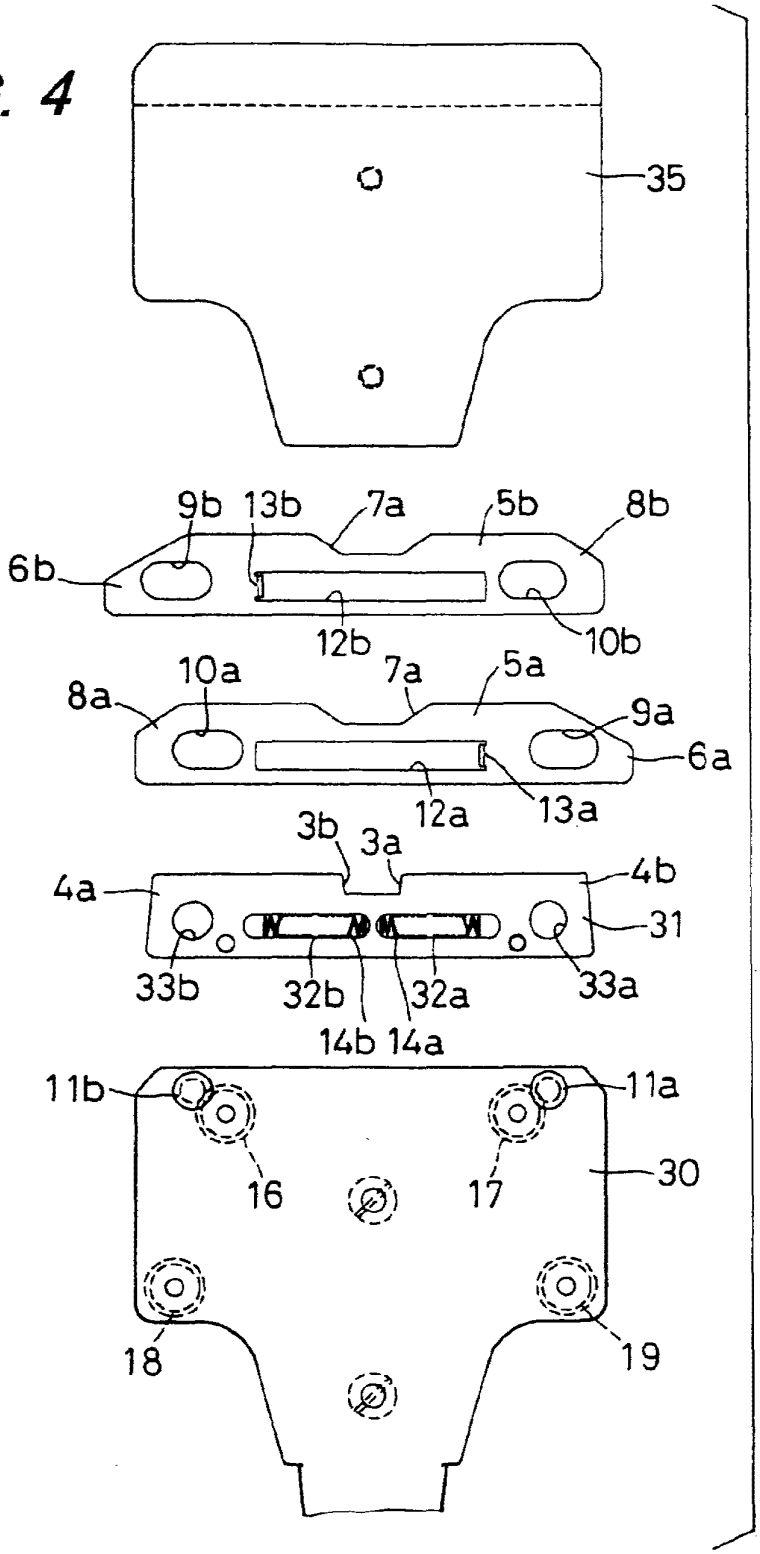


Skechers EX1013-p. 406
Skechers v Nike

FIG. 5

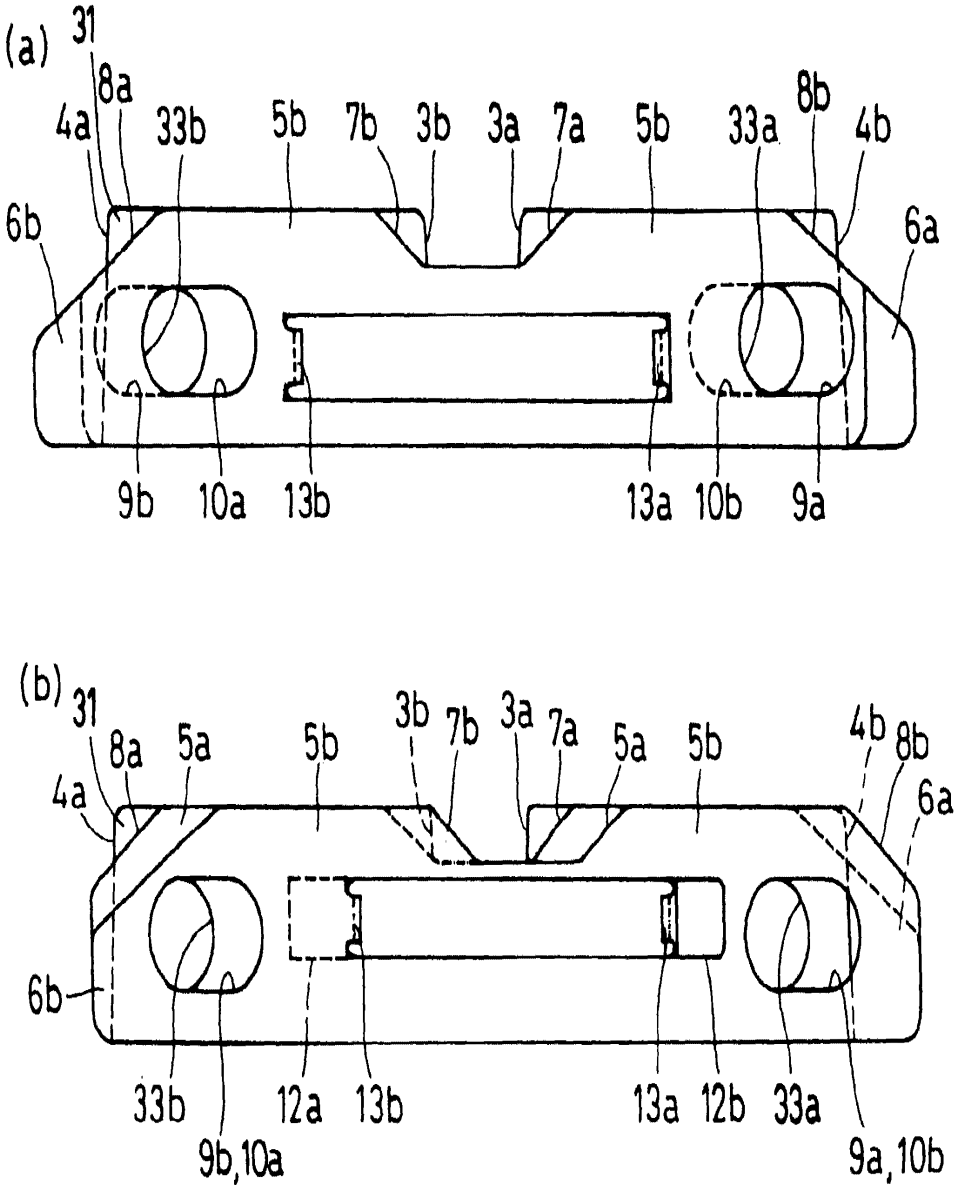

Skechers EX1013-p. 407
Skechers v Nike

FIG. 6

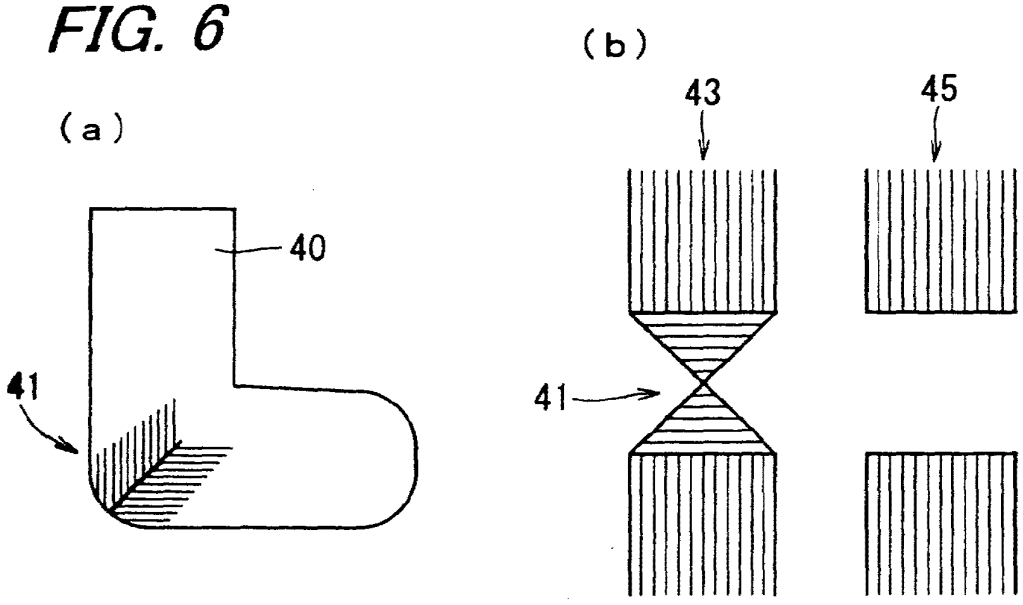

Skechers EX1013-p. 408
Skechers v Nike

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP2004/002194

A. CLASSIFICATION OF SUBJECT MATTER
Int.Cl[7] D04B15/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
Int.Cl[7] D04B15/56

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2004
Kokai Jitsuyo Shinan Koho 1971-2004 Jitsuyo Shinan Toroku Koho 1996-2004

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 8-13295 A (Kabushiki Kaisha Sansei Seisakusho), 16 January, 1996 (16.01.96), (Family: none)	1-4
A	US 4513588 A (Universal Maschinenfabrik), 30 April, 1985 (30.04.85), & JP 61-58578 B & DE 3245233 A & ES 8406587 A & FR 2537170 A & GB 2131460 A & IT 1194497 A & SU 1447292 A	1-4
A	JP 61-58576 B2 (Kabushiki Kaisha Shima Idea Center), 12 December, 1986 (12.12.86), (Family: none)	1-4

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
31 March, 2004 (31.03.04)	13 April, 2004 (13.04.04)
Name and mailing address of the ISA/ Japanese Patent Office	Authorized officer
Facsimile No.	Telephone No.

Form PCT/ISA/210 (second sheet) (January 2004)

Skechers EX1013-p. 409
Skechers v Nike

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP2004/002194

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 62-45019 Y2 (Kabushiki Kaisha Shima Idea Center), 30 November, 1987 (30.11.87), (Family: none)	1-4
A	US 6021651 A (Shima Seiki Manufacturing, Ltd.), 08 February, 2000 (08.02.00), & JP 3044370 B2 & EP 898002 B1 & CN 1133765 B & TW 421681 A	1-4
A	JP 55-148256 A (Kabushiki Kaisha Sansei Seisakusho), 18 November, 1980 (18.11.80), (Family: none)	1-4

Form PCT/ISA/210 (continuation of second sheet) (January 2004)

Skechers EX1013-p. 410
Skechers v Nike

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 972 706 A1

(12) EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:
24.09.2008 Bulletin 2008/39

(21) Application number: **06832769.1**

(22) Date of filing: **16.11.2006**

(51) Int Cl.:
D04B 7/14 *(2006.01)* ***D04B 15/56*** *(2006.01)*

(86) International application number:
PCT/JP2006/322889

(87) International publication number:
WO 2007/058275 (24.05.2007 Gazette 2007/21)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR

(30) Priority: **17.11.2005 JP 2005333269**

(71) Applicant: **Shima Seiki Manufacturing., Ltd.**
Wakayama 641-8511 (JP)


(72) Inventor: **YAMANO, Hirotoshi**
Wakayama-shi
Wakayama 641-8511 (JP)

(74) Representative: **Wagner, Karl H.**
Wagner & Geyer Partnerschaft
Patent- und Rechtsanwälte
Gewürzmühlstrasse 5
80538 München (DE)

(54) WEFT KNITTING MACHINE CAPABLE OF INSERTING WARP AND KNITTING METHOD BY THAT WEFT KNITTING MACHINE

(57) The invention relates a warp insertable weft knitting machine in which a knitting yarn is fed only to knitting needles on one of the needle beds, and a fabric can be knitted also with knitting needles on the other of the needle beds, without using a special yarn guide apparatus or the like, using a warp, and a knitting method in the weft knitting machine. When hooks (19) of five knitting needles (17) are advanced from a back needle bed (23) between knitting needles (16a, 16b) on a front needle bed (22), it is possible to knit back stitches with these five knitting needles (17). The number of knitting needle (16a) and the number of knitting needle (16b) may not limited to one, respectively. The knitting needles (16) from the front needle bed (22) can be advanced to an area in which the knitting needles (17) have been advanced from the back needle bed (23), and thus rib, links, or other structures with the knitting needles (16, 17) from the front and back needle beds can be knitted using a knitting yarn fed as a warp.

FIG. 1

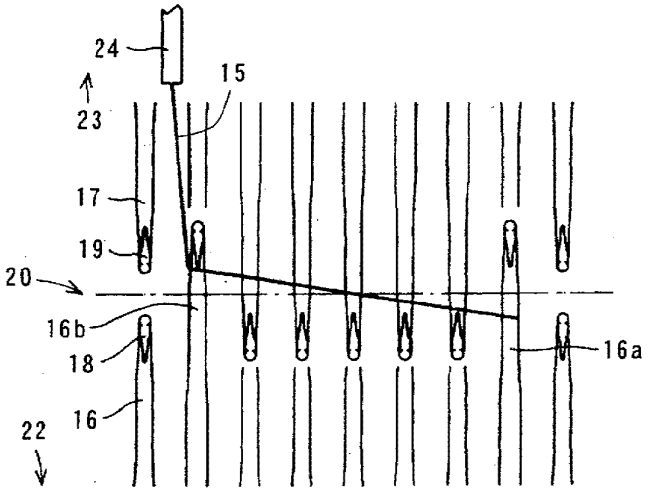

EP 1 972 706 A1

Description

Technical Field

[0001] The present invention relates to a warp insertable weft knitting machine having not only a function to perform basic knitting of a fabric with a weft as a knitting yarn, but also a function to perform knitting of a fabric with a knitting yarn that can act as a warp, fed from a lace bar, and a knitting method in the weft knitting machine.

Background Art

[0002] It is conventionally known that a weft knitting machine 1 as shown in Fig. 10 is capable of knitting a structure similar to a warp knitting structure (see Japanese Examined Patent Publication JP-B2 3452639, for example). In the weft knitting machine 1, a pair of needle beds, a front needle bed 2 and a back needle bed 3, are opposed to each other at a needle bed gap 4. A warp insertion mechanism 5 is provided above the needle bed gap 4. A plurality of knitting needles 6 and 7 are arranged side by side respectively on the front needle bed 2 and the back needle bed 3. The warp insertion mechanism 5 can feed a knitting yarn that can act as a warp to a hook at a leading end of the knitting needle 6 which is advanced from the front needle bed 2 to the needle bed gap 4. Carriages 8 and 9 on which a cam mechanism is mounted are arranged on the front needle bed 2 and the back needle bed 3 so as to be capable of traveling back and forth in a direction perpendicular to a plane of paper. The cam mechanism is for selectively driving a plurality of knitting needles 6 and 7 back and forth with respect to the needle bed gap 4. Yarn feeders 10 are supported by yarn guide rails 11 above the needle bed gap 4 so as to be capable of traveling back and forth in a direction perpendicular to the plane of paper. A plurality of yarn guide rails 11 (for example, three yarn guide rails 11, in Fig. 10) extend above the needle bed gap 4 in a direction perpendicular to the plane of paper. Tracks on which the yarn feeders 10 travel are located on both sides of the yarn guide rails 11. The carriages 8 and 9 can selectively bring any one of the yarn feeders 10. The yarn feeders 10 feed a knitting yarn to the knitting needles 6 and 7 which are advanced to the needle bed gap 4. The weft knitting machine 1 can obtain a knitted fabric of a basic weft knitting structure by causing the carriages 8 and 9 to bring the yarn feeders 10 and causing the cam mechanism to drive the knitting needles 6 and 7.

[0003] The warp insertion mechanism 5 can perform a swing motion about a swing shaft 12 and a reciprocating motion along the swing shaft 12. The warp insertion mechanism 5 includes a plurality of lace bars 13. A plurality of yarn feeding tubes 14 can be attached to each of the lace bars 13. Each of the yarn feeding tubes 14 can feed a knitting yarn to a hook at the leading end of the knitting needle 6 which is advanced from the front needle bed 2 to the needle bed gap 4. The plurality of yarn feeding tubes 14 are spaced away from each other in a direction perpendicular to the plane of paper. Four rows of yarn feeding tubes 14 can be arranged in the warp insertion mechanism 5, as shown in Fig. 10. The swing motion of the warp insertion mechanism 5 about the swing shaft 12 causes the tip of the yarn feeding tube 14 to perform a swing operation crossing the needle bed gap 4. The reciprocating motion of the warp insertion mechanism 5 along the swing shaft 12 causes the tip of the yarn feeding tube 14 to perform a lapping operation in the longitudinal direction of the needle bed gap 4. A structure similar to a warp knitting structure can be knitted with a combination of the swing operation and the lapping operation of the yarn feeding tube 14 on the knitting needle 6. Herein, in a case where knitting yarns are fed to a plurality of knitting needles 6 with the lapping operation, a weft knitting structure is knitted with intermediate knitting needles 6. It should be noted that the swing operation and the lapping operation are performed in a state where the carriages 8 and 9 and the yarn feeders 10 have been stopped at positions away from the yarn feeding tubes 14 in a direction perpendicular to the plane of paper.

[0004] The warp insertion mechanism 5 can be used for the purpose of not only knitting a structure similar to a warp knitting structure but also knitting a weft knitting structure (see Japanese Unexamined Patent Publication JP-A 8-74146 (1996), for example). Fig. 16 in JP-A 8-74146 shows an example in which plating knitting is partially performed with a combination of knitting yarns corresponding to those fed from the yarn feeder 10 and from the yarn feeding tube 14 in Fig. 10 of the present application. Fig. 17 in JP-A 8-74146 shows an example in which a belt-like pattern with a relatively narrow width is knitted using many yarn feeding tubes 14 that can be attached at relatively narrow intervals to the lace bar 13. Fig. 1 in JP-A 8-74146 shows the arrangement of cams on a front carriage corresponding to the carriage 8 for the front needle bed 2 shown in Fig. 10 of the present application. Three cam systems are mounted on the front carriage. The middle system is a weft cam lock having functions of knitting and stitch transfer. The systems on both sides of the middle system are warp cam locks for performing knitting with a knitting yarn fed from the warp insertion mechanism 5.

[0005] With the weft knitting machine 1 as shown in Fig. 10, it is also possible to knit a weft knitting structure as described above using a knitting yarn fed from the yarn feeding tube 14 in the warp insertion mechanism 5. However, the weft knitting machine 1 is specified such that the warp insertion mechanism 5 feeds a knitting yarn only to the knitting needles 6 on the front needle bed 2, which is one of two needle beds. According to the specification of this type of weft knitting machine 1, a knitting yarn is not fed from the yarn feeding tube 14 to the knitting needles 7 on the back needle bed 3, which is the other of the needle beds, and a warp cam lock adapted for knitting using a knitting yarn fed from the yarn feeding

Skechers EX1013-p. 412
Skechers v Nike

tube 14 is not mounted on the carriage 9. The reason for this is that a knitting yarn cannot be stably fed at all times to the hook of the knitting needle 7 which is advanced from the back needle bed 3 to the needle bed gap 4 although a knitting yarn may be able to be fed thereto from a limited number of the rows of yarn feeding tubes 14, for example, the left rows in Fig. 10 with the swing operation and the lapping operation.

[0006] A configuration is also conceivable in which a knitting yarn fed from a yarn feeding tube 14 is guided by an additional special guide apparatus, or the like, to the hook of the knitting needle 7 on the back needle bed 3. However, with this sort of guide apparatus or the like, the configuration of the weft knitting machine 1 may be complicated, and the number of the yarn feeders 10 or the yarn feeding tubes 14 that can be used may be limited.

Disclosure of Invention

[0007] It is an object of the invention to provide a warp insertable weft knitting machine in which a knitting yarn is fed only to knitting needles on one of the needle beds as in conventional apparatuses, and a fabric can be knitted also with knitting needles on the other of the needle beds, without using a special yarn guide apparatus or the like, using a knitting yarn inserted as a warp and a knitting method in the weft knitting machine.

[0008] The invention is directed to a warp insertable weft knitting machine comprising a pair of needle beds which are opposed to each other at a needle bed gap and a lace bar capable of feeding a knitting yarn that can act as a warp only to one of the needle beds, comprising:

a plurality of hook members that are arranged on the one of the needle beds and can be advanced to the needle bed gap;
advancement drive means which drives the hook members such that the hook members are advanced from the one of the needle beds to the needle bed gap, at positions on both sides of an area in which knitting is performed with knitting needles on the other of the needle beds; and
knitting drive means which drives the knitting needles such that the knitting needles are advanced from the other of the needle beds and knits a fabric using a knitting yarn that is fed from the lace bar and hooked between the hook members.

[0009] Moreover, the invention is directed to a knitting method in a warp insertable weft knitting machine comprising a pair of needle beds which are opposed to each other at a needle bed gap and a lace bar capable of feeding a knitting yarn that can act as a warp only to one of the needle beds, wherein knitting is also performed on the other of the needle beds using the knitting yarn fed from the lace bar, comprising:

advancing hook members from the one of the needle beds at positions inside the needle bed gap on both sides of an area in which knitting is performed with knitting needles on the other of the needle beds;
advancing the knitting needles from the other of the needle beds at a position in the area in which knitting is performed inside the needle bed gap;
feeding a knitting yarn from the lace bar such that the knitting yarn is hooked between the hook members which are advanced from the one of the needle beds to the needle bed gap; and
knitting a fabric using the hooked knitting yarn with the knitting needles which are advanced from the other of the needle beds to the needle bed gap.

[0010] Furthermore, in the invention, it is preferable that the knitting needles on the other of the needle beds are advanced to the needle bed gap, after the hook members are advanced from the one of the needle beds to the needle bed gap and the knitting yarn fed from the lace bar is hooked between the hook members.

[0011] Furthermore, in the invention, it is preferable that the knitting needles on the one of the needle beds are used as the hook members.

[0012] Furthermore, in the invention, it is preferable that a fabric using the knitting yarn hooked between the hook members is knitted also with the knitting needles on the one of the needle beds.

Brief Description of Drawings

[0013] Other and further objects, features, and advantages of the invention will be more explicit from the following detailed description taken with reference to the drawings.

[0014] Fig. 1 is a partial plan view showing a basic concept which is to make it possible to knit a fabric using a warp also with knitting needles on a back needle bed, in a weft knitting machine in which the warp can be fed only to knitting needles on a front needle bed as one embodiment of the invention.

[0015] Fig. 2 is a right side cross sectional view showing a state in which a swing operation of swinging a yarn feeding tube in Fig. 1 in a direction away from a needle bed gap has been performed to pull out the warp to a position below a path on which a knitting needle on the front needle bed is advanced and retracted with respect to the needle bed gap.

[0016] Fig. 3 is a right side cross sectional view showing a state in which a swing operation of swinging the yarn feeding tube in Fig. 1 toward a position above the needle bed gap has been performed to hook the warp from below to above around a needle shaft of the knitting needle on the front needle bed as the knitting needle is advanced to the needle bed gap.

[0017] Fig. 4 is a right side cross sectional view showing a state in which a lapping operation of moving the yarn feeding tube in Fig. 1 to a deeper side on a plane of paper and a swing operation of swinging the yarn feed-

Skechers EX1013-p. 413
Skechers v Nike

ing tube in a direction away from the needle bed gap have been performed to hook the warp on a hook of a knitting needle and then to pull out the warp to a position above the back needle bed.

[0018] Fig. 5 is a right side cross sectional view showing a state in which hooks of the knitting needles have been advanced from the back needle bed in Fig. 1 to the needle bed gap.

[0019] Fig. 6 is a right side cross sectional view showing a state in which a swing operation of swinging all of four rows of yarn feeding tubes toward positions above the needle bed gap in the weft knitting machine in Fig. 1.

[0020] Fig. 7 is a view showing a simplified configuration of a cam mechanism that enables knitting to be performed using the warp as shown in Fig. 1 also with the knitting needles on the back needle bed.

[0021] Fig. 8 is a view showing in a simplified manner a configuration of warp cams in Fig. 7, loci of butts of knitting needles guided by the cams and a configuration of the knitting needle.

[0022] Fig.9 is a view showing in a simplified manner the configuration of the warp cams in Fig. 7 and the loci of butts of knitting needles guided by the cams.

[0023] Fig. 10 is a right side cross sectional view showing a schematic configuration of a conventional weft knitting machine in which the warp can be inserted.

Best Mode for Carrying out the Invention

[0024] Now referring to the drawings, preferred embodiments of the invention are described below.

[0025] Fig. 1 shows a basic concept which is to make it possible to knit a fabric using a warp 15 also with knitting needles 17 on a back needle bed 23, in a weft knitting machine 21 in which the warp 15 can be fed only to knitting needles 16 on a front needle bed 22 as one embodiment of the invention. As described above, the warp 15 is not necessarily a knitting yarn used for knitting a warp knitting structure, but is referred to as a "warp" for the sake of convenience. The warp 15 is fed so as to be hooked on a needle shaft at a point closer to a trailing end than a hook 18 of one of the knitting needles 16 on the front needle bed 22. The knitting needles 16 for hooking the warp 15 on the front needle bed 22 are selected so as to be spaced away from each other. Hooks 19 of the knitting needles 17 on the back needle bed 23 are advanced between the knitting needles 16. A needle bed gap 20 to which the hooks 18 and 19 are advanced is formed as a gap where the front needle bed 22 and the back needle bed 23 are opposed to each other in the weft knitting machine 21. With the yarn feeders 10 as shown in Fig. 10, a knitting yarn can be fed to both knitting needles which are advanced from the front and back needle beds. However, the warp 15 is fed with a combination of a swing operation and a lapping operation of a yarn feeding tube 24, and thus the warp 15 cannot be stably fed to the knitting needles 17 on the back needle bed 23. The warp 15 can be stably fed from the yarn feeding tube 24 to the needle bodies of the knitting needles 16 on the front needle bed 22, and thus the warp 15 can be reliably hooked between the knitting needles 16. Furthermore, when the warp 15 is hooked in the needle bed gap 20 between the knitting needles 16 from the front needle bed 22, it is possible to form a knitting loop, by advancing the hook 19 of the knitting needle 17 from the back needle bed 23 to hook the warp 15 on the hook 19, and then pulling the knitting needle 17 into the back needle bed 23. Hereinafter, among the knitting needles 16 hooking the warp 15, a knitting needle on which the warp is initially hooked is referred to as a knitting needle 16a, and a knitting needle on which the warp is subsequently hooked which warp communicates with the yarn feeding tube 24 is referred to as a knitting needle 16b.

[0026] It is possible to form back stitches with five knitting needles 17, by advancing the hooks 19 of the five knitting needles 17 from the back needle bed 23, between the knitting needles 16a and 16b that are advanced from the front needle bed 22 to the needle bed gap 20 as shown in Fig. 1. The number of the knitting needle 16a that is advanced from the front needle bed 22 to the needle bed gap 20 is not limited to one, and the number of the knitting needle 16b that is advanced from the front needle bed 22 to the needle bed gap 20 is not limited to one. The warp 15 may be hooked between the knitting needles 16a and 16b on the front needle bed 22, at the boundary between a region in which face stitches are to be formed with a plurality of knitting needles 16 and.a region in which back stitches are to be formed with a plurality of knitting needles 17. Furthermore, in Fig. 1, the knitting needles 16 from the front needle bed 22 can be advanced to an area in which the knitting needles 17 have been advanced from the back needle bed 23, and thus rib, links, or other structures with the knitting needles 16 and 17 from the front and back needle beds can be knitted using a knitting yarn fed as a warp. Herein, in the weft knitting machine 21, a cam mechanism mounted on carriages that travel along the needle beds drives the knitting needles 16 and 17 to advance and retract them. Thus, the state is not kept in which the knitting needles 16 and 17 have been advanced to the needle bed gap 20 as shown in Fig. 1. In Fig. 1, the knitting needles are driven such that the knitting needle 16a is initially advanced and retracted with respect to the needle bed gap 20, the five knitting needles 17 are subsequently advanced and retracted with sequentially shifted phases with respect to the needle bed gap 20, and then the knitting needle 16b is finally advanced and retracted with respect to the needle bed gap 20.

[0027] Figs. 2, 3, 4, and 5 show a schematic procedure in which knitting is performed using the warp 15 with the knitting needles 17 on the back needle bed 23 as shown in Fig. 1. Fig. 2 shows a state in which the swing operation of swinging the yarn feeding tube 24 in a direction away from the needle bed gap 20 has been performed to pull out the warp 15 to a position below the path on which the knitting needle 16a on the front needle bed 22 is ad-

Skechers EX1013-p. 414
Skechers v Nike

vanced and retracted with respect to the needle bed gap 20. Fig. 3 shows a state in which the swing operation of swinging the yarn feeding tube 24 toward a position above the needle bed gap 20 has been performed to hook the warp 15 from below to above around the needle shaft of the knitting needle 16a on the front needle bed 22 as the knitting needle are advanced to the needle bed gap 20. Fig. 4 shows a state in which the lapping operation of moving the yarn feeding tube 24 to the deeper side on a plane of paper and the swing operation of swinging the yarn feeding tube 24 in a direction away from the needle bed gap 20 have been performed to hook the warp 15 on the needle shaft of the knitting needle 16b and then to pull out the warp 15 to a position above the back needle bed 23. Fig. 5 shows a state in which the hooks 19 of the knitting needles 17 have been advanced from the back needle bed 23 to the needle bed gap 20.

[0028] As shown in Fig. 10, a plurality of rows of yarn feeding tubes 24, for example, four rows can be provided. However, in Figs. 2 to 5, only one row is shown for the sake of convenience. The knitting needles 16 and 17 are latch needles. A stitch transfer blade 25 is attached to one side face of the latch needle. The hooks 18 and 19 at leading ends of the knitting needles 16 and 17 can be opened and closed with latches 26 and 27. The knitting needles 16 and 17 are accommodated in needle grooves so as to be capable of being advanced and retracted with respect to the needle bed gap 20. The needle grooves are formed between needle plates 28 and 29 that are arranged upright at a constant pitch respectively on the front needle bed 22 and the back needle bed 23. Wires 30 and 31 such as piano wires are arranged in a direction perpendicular to the plane of paper so as to pass through the vicinity of the ends of the front needle bed 22 and the back needle bed 23 that face the needle bed gap 20. The wires 30 and 31 function substantially as front edges of the front needle bed 22 and the back needle bed 23 that are located on the side of the needle bed gap 20. In the weft knitting machine 21, the wires 30 and 31 are supported by fixed sinkers 32 and 33 that are respectively attached to the front needle bed 22 and the back needle bed 23.

[0029] As the knitting needles 16 and 17, it is also possible to use compound needles in which a needle main body and a slider can be advanced and retracted independently of each other, instead of using latch needles. In a case where a compound needle is used in which a tongue at the leading end of the needle is separated into two portions as a slider to sandwich a hook of a needle main body therebetween, it is possible to perform stitch transfer and the like by advancing the slider to the needle bed gap 20. Thus, the stitch transfer blade 25 does not have to be used.

[0030] Fig. 6 shows a state in which the swing operation of swinging all of four rows of yarn feeding tubes toward positions above the needle bed gap 20. The swing operation is performed by angularly displacing a warp insertion mechanism 35 about a swing shaft 34 perpendicular to the plane of paper. In Figs. 2 to 5, only one yarn feeding tube 24 is shown, but the yarn feeding tube 24 is the yarn feeding tube that is the farthest from the front needle bed 22 of the four rows of yarn feeding tubes. The yarn feeding tube that is the closest to the front needle bed 22 of the four rows is referred to as a yarn feeding tube 36. Each of rows of yarn feeding tubes is attached to a lace bar 37. The lace bar 37 can be angularly displaced about the swing shaft 34 of the warp insertion mechanism 35. This swinging displacement is driven by a swing mechanism 38. The swing operation of the lace bar 37 driven by the swing mechanism 38 causes the swing operation in which the tip of each yarn feeding tube is swung between a position above the needle bed gap 20 and a position away from the needle bed gap 20 above the back needle bed 23. Herein, it is not possible to pull the warp 15 to a position below the knitting needles 17 as the knitting needles are advanced from the back needle bed 23 to the needle bed gap 20, even with the swing operation of the yarn feeding tube 24 to a position above the needle bed gap 20. More specifically, the states corresponding to Figs. 2 and 4 cannot be realized for the knitting needles 17 from the back needle bed 23. Thus, in this embodiment, the warp 15 has been hooked between the needle bodies of the knitting needles 16 which are advanced from the front needle bed 22 to the needle bed gap 20 as shown in Figs. 2 to 4. It should be noted that a knitting yarn acting as a weft can be fed from yarn feeders 39 to each of the knitting needles 16 and 17.

[0031] Fig. 7 shows the simplified configuration of a cam mechanism 40 that enables knitting to be performed using the warp 15 also with the knitting needles 17 on the back needle bed 23. The cam mechanism 40 is mounted separately as a carriage on the side of the front needle bed 22 and a carriage on the side of the back needle bed 23. Three cam systems are mounted on each of the carriages. The middle systems serving as knitting and stitch transfer cams 41F and 41B are mounted on the side of the front needle bed 22 and on the side of the back needle bed 23, respectively. Hereinafter, symbols "F" and "B" refer to the side of the front needle bed 22 and the side of the back needle bed 23, respectively. The knitting and stitch transfer cams 41F and 41B are formed for the purpose of enabling a knitting operation and a stitch transfer operation to be performed with a weft fed from the yarn feeders 39 in Fig. 6. Warp cams 42F and 42B; 43F and 43B are respectively provided on both sides of the knitting and stitch transfer cams 41F and 41B on the carriages. When the carriages travel to the left, the warp cams 42F and 42B are at the front, and the warp cams 43F and 43B are at the back. When the carriage travel to the right, the warp cams 43F and 43B are at the front, and the warp cams 42F and 42B are at the back.

[0032] Herein, the carriages for the front needle bed 22 and the back needle bed 23 can also bring the yarn feeders 39 along with the warp cams 42F and 42B; 43F and 43B. Thus, it is also possible to perform knitting with a weft fed from the yarn feeder 39, using the warp cams

Skechers EX1013-p. 415
Skechers v Nike

42F and 42B; 43F and 43B. Moreover, it is possible to perform the kitting operation of knit with a first cam system S1 and to perform the stitch transfer operation with a second cam system S2, of the three cam systems.

[0033] Figs. 8 and 9 show in a simplified manner the configuration of the warp cams 43F and 43B in Fig. 7 and the loci of butts of knitting needles guided by the cams. Fig. 8 also shows the configuration of the knitting needle 16. The hook 18 and the latch 26 are arranged at the leading end of the knitting needle 16. A needle jack 45 is linked to the trailing end of the knitting needle 16. The needle jack 45 includes a butt 46 projecting upward from the needle groove. The cam mechanism 40 in Fig. 7 acts on the butt 46 of the needle jack 45. Herein, in a case where the knitting needle is a compound needle, a slider cam is also provided. Furthermore, also on the side of the back needle bed 23, a needle jack is linked to the knitting needle 17, and the cams act on a butt of the needle jack to drive the knitting needle 17. Elements on the side of the back needle bed 23 are shown in the upper portion, and those of the front needle bed 22 are shown in the lower portion, with the needle bed gap 20 interposed therebetween.

[0034] The warp cams 43F and 43B include needle raising cams 50F and 50B, guard cams 51F and 51B, and knitting cams 52F and 52B. The knitting cams 52F and 52B are situated only on the side closer to the knitting and stitch transfer cams 41F and 41B in Fig. 7. A butt path 53 is provided on the side farther from the knitting and stitch transfer cams 41F and 41B, on the warp cam 43F on the side of the front needle bed 22. The butt path 53 guides the butt 46 from a tuck-height path 53a to a plating-height path 53b.

[0035] Fig. 8 shows butt loci 54F and 54B when the carriages travel to the left. The butt locus 54F on the side of the front needle bed 22 extends from a position below the knitting cam 52F through the gap between the needle raising cam 50F and the guard cam 51F. At a peak 50Fa of the needle raising cam 50F, the butt locus 54F reaches a knit height and the most advancing position with respect to the needle bed gap 20. In a case where a knitting loop is held on the hook 18 of the knitting needle 16, the latch 26 is opened and the knitting loop is moved toward the needle shaft, and thus the knitting loop is cleared. After the peak 50Fa, the butt locus 54F returns to the tuck height. In a case where the knitting needle 16 has been selected for tuck, the peak 50Fa does not act, and thus the butt locus 54F is kept at the tuck height. After the peak 50Fa, the butt 46 is guided so as to enter the tuck-height path 53a and then the plating-height path 53b of the butt path 53. Consequently, after the travel of the carriage, the knitting needle 16 has been advanced to the needle bed gap 20 at the plating height that is slightly higher than the tuck height. On the side of the back needle bed 23, the butt does not project from the needle groove and is sunk therein such that the butt locus 54B of the needle jack extends without receiving the action of the needle raising cam 50B. Consequently, even after the travel of the carriage, the knitting needle 17 stays pulled back into the back needle bed 23, without being advanced to the needle bed gap 20. Herein, it is also possible to end the butt locus 54F at the tuck height, without providing the butt path 53 on the side of the front needle bed 22 with the plating-height path 53b.

[0036] Fig. 9 shows butt loci 55F and 55B when the carriages travel to the right. The butt locus 55F on the side of the front needle bed 22 extends from the plating-height path 53b to the tuck-height path 53a of the butt path 53 in the opposite direction of Fig. 8. The tuck height is kept by causing the peak 50Fa of the needle raising cam 50F so as not to act, and the knitting cam 52F is caused to act thereby pulling the knitting needle 16 back into the front needle bed 22. The butt locus 55B on the side of the back needle bed 23 guides the butt so that the butt is advanced toward the needle bed gap 20 up to the knit height at a peak 50Ba of the needle raising cam 50B, and the knitting needle 17 is pulled by the knitting cam 52B back into the back needle bed 23.

[0037] Even the warp cams 42F and 42B shown in Fig. 7 can be used for knitting with the warp 15 using the knitting needles 17 on the back needle bed 23, with operations symmetrical to those in Figs. 8 and 9. Herein, the knitting needles 16 have been advanced from the front needle bed 22 to the needle bed gap 20, and the warp 15, fed from the yarn feeding tube 24 of the warp insertion mechanism 25, is hooked between the knitting needles 16. However, the hook members that are advanced from the front needle bed 22 and hook the warp 15 are not limited to the knitting needles 16. For example, a member such as a yarn guide that is advanced and retracted with respect to the needle bed gap 20 may be provided with a portion for hooking the warp 15 fed from the yarn feeding tube 24, or a member only for receiving and hooking the warp 15 may be provided. Furthermore, in a case where a compound needle is used as the knitting needle, it is also possible to hook the warp 15 on the slider by changing the path along which the slider is guided. When the hook member that is advanced to the needle bed gap 20 does not pull the warp 15 into the front needle bed 22 but releases the warp 15 at the needle bed gap 20, it is possible to form only back stitches with the knitting needles 17 on the back needle bed 23.

[0038] In Fig. 8, the knitting needles 16 on the front needle bed 22 are advanced to the needle bed gap 20 with the travel of the carriages, and then the warp 15 is hooked between the knitting needles 16. With the next travel of the carriages, the knitting needles 17 on the back needle bed 23 are advanced to the needle bed gap 20 and then retracted therefrom, and the knitting needles 16 on the front needle bed 22 are also retracted from the needle bed gap 20. However, it is also possible to advance both the knitting needles 16 on the front needle bed 22 and the knitting needles 17 on the back needle bed 23 between the knitting needles 16 to the needle bed gap 20 with the travel of the carriages, so as to hook the warp 15 between the knitting needles 16 on the front

Skechers EX1013-p. 416
Skechers v Nike

needle bed 22, and then to simultaneously retract the knitting needles 16 on the front needle bed 22 and the knitting needles 17 on the back needle bed 23 from the needle bed gap 20 with the next travel of the carriages.

[0039] In order to enable this sort of knitting operation to be performed, the guard cam 51B for the back needle bed 23 shown in Figs. 8 and 9 may be provided with the butt path 53 as in the guard cam 51F for the front needle bed 22. When the guard cam 51B is also provided with the butt path 53, the warp cams 42F and 42B; 43F and 43B are longitudinally symmetrical. It is possible to simultaneously advance the front and back knitting needles 16 and 17 to the needle bed gap 20, to hook the warp 15 between the knitting needles 16 and 17, and then to perform knitting using the hooked warp 15 with the knitting needles 17 on the back needle bed 23, by making the butt loci on the side of the back needle bed 23 longitudinally symmetrical to the butt loci 54F and 55F on the side of the front needle bed 22.

[0040] As described above, in the warp insertable weft knitting machine 21, a pair of needle beds such as the front needle bed 22 and the back needle bed 23 are opposed to each other at the needle bed gap 20. The lace bar 37 can feed a knitting yarn that can act as the warp 15 only to one of the needle beds such as the front needle bed 22. The weft knitting machine 21 includes hook members such as the knitting needles 16, advancement drive means such as the warp cams 42F and 43F, and knitting drive means such as the warp cams 42B and 43B. A plurality of hook members are arranged on the one of the needle beds, and can be advanced to the needle bed gap 20. The advancement drive means advances the hook members to the needle bed gap 20, at positions on both sides of an area in which knitting is performed at the other of the needle beds such as the back needle bed 23. A knitting yarn fed from the lace bar 37 can be hooked between the hook members which are advanced to the needle bed gap 20. In a state where the knitting yarn has been hooked between the hook members, it is possible to perform knitting using the other of the needle beds, without using a special yarn guide apparatus or the like, by driving the knitting needles 17 with the knitting drive means such that the knitting needles 17 are advanced from the other of the needle beds at positions between the hook members and knit a fabric using the hooked knitting yarn. For example, even when only face stitches can be formed with the knitting needles 16 on the one of the needle beds, back stitches also can be formed with the knitting needles 17 on the other of the needle beds.

[0041] The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The present embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing description and all changes which come within the meaning and the range of equivalency of the claims are therefore intended to be embraced therein.

Industrial Applicability

[0042] According to the invention, in a needle bed gap, hook members can be advanced from one of the needle beds of the needle beds at positions on both sides of an area in which knitting is performed at another of the needle beds, and a knitting yarn fed from a lace bar can be hooked between the hook members. In a state where the knitting yarn is hooked between the hook members, it is possible to perform knitting using a knitting needle on the other of the needle beds, without using a special yarn guide apparatus or the like, by driving the knitting needle on the other of the needle beds such that the knitting needle that has been advanced to the needle bed gap is retracted therefrom between the hook members. The knitting needle on the other of the needle beds may be advanced to the needle bed gap, either before or after the knitting yarn is hooked between the hook members. For example, even when only face stitches can be formed with a knitting needle on the one of the needle beds, back stitches also can be formed with the knitting needle on the other of the needle beds.

[0043] Furthermore, according to the invention, the hook members are advanced from the one of the needle beds at positions inside the needle bed gap on both sides of an area in which knitting is performed at the other of the needle beds. The knitting needle is advanced from the other of the needle beds to a position within this area inside the needle bed gap. The knitting yarn is fed from the lace bar so as to be hooked between the hook members which are advanced from the one of the needle beds to the needle bed gap. A fabric is knitted with the knitting needle which is advanced from the other of the needle beds to the needle bed gap, using the knitting yarn hooked between the hook members. Thus, it is possible to perform knitting using the other of the needle beds, without using a special yarn guide apparatus or the like.

[0044] Furthermore, according to the invention, after the knitting yarn fed from the lace bar is hooked between the hook members which are advanced from the one of the needle beds to the needle bed gap, the knitting needle is advanced from the other of the needle beds to a position between the yarn feeding members. Thus, it is possible to knit a fabric using the knitting yarn fed from the lace bar also with the knitting needle on the other of the needle beds.

[0045] Furthermore, according to the invention, knitting needles on the one of the needle beds are used as the hook members. Thus, it is possible to perform knitting using the knitting needle on the other of the needle beds, in the basic configuration of conventional weft knitting machines.

[0046] Furthermore, according to the invention, a fabric using the knitting yarn hooked between the hook members is knitted also with the knitting needle on the one of the needle beds. Thus, it is possible to knit rib, links, or

Skechers EX1013-p. 417
Skechers v Nike

other structures using the knitting yarn fed as a warp, with the knitting needles on both needle beds that are opposed to each other with the needle bed gap interposed therebetween.

Claims

1. A warp insertable weft knitting machine comprising a pair of needle beds which are opposed to each other at a needle bed gap and a lace bar capable of feeding a knitting yarn that can act as a warp only to one of the needle beds, comprising:

   a plurality of hook members that are arranged on the one of the needle beds and can be advanced to the needle bed gap;
   advancement drive means which drives the hook members such that the hook members are advanced from the one of the needle beds to the needle bed gap, at positions on both sides of an area in which knitting is performed with knitting needles on the other of the needle beds; and
   knitting drive means which drives the knitting needles such that the knitting needles are advanced from the other of the needle beds and knits a fabric using a knitting yarn that is fed from the lace bar and hooked between the hook members.

2. A knitting method in a warp insertable weft knitting machine comprising a pair of needle beds which are opposed to each other at a needle bed gap and a lace bar capable of feeding a knitting yarn that can act as a warp only to one of the needle beds, wherein knitting is also performed on the other of the needle beds using the knitting yarn fed from the lace bar, comprising:

   advancing hook members from the one of the needle beds at positions inside the needle bed gap on both sides of an area in which knitting is performed with knitting needles on the other of the needle beds;
   advancing the knitting needles from the other of the needle beds at a position in the area in which knitting is performed inside the needle bed gap;
   feeding a knitting yarn from the lace bar such that the knitting yarn is hooked between the hook members which are advanced from the one of the needle beds to the needle bed gap; and
   knitting a fabric using the hooked knitting yarn with the knitting needles which are advanced from the other of the needle beds to the needle bed gap.


3. The method of claim 2, wherein the knitting needles on the other of the needle beds are advanced to the needle bed gap, after the hook members are advanced from the one of the needle beds to the needle bed gap and the knitting yarn fed from the lace bar is hooked between the hook members.

4. The method of claim 2 or 3, wherein the knitting needles on the one of the needle beds are used as the hook members.

5. The method of any one of claims 2 to 4, wherein a fabric using the knitting yarn hooked between the hook members is knitted also with the knitting needles on the one of the needle beds.


Skechers EX1013-p. 418
Skechers v Nike

FIG. 1

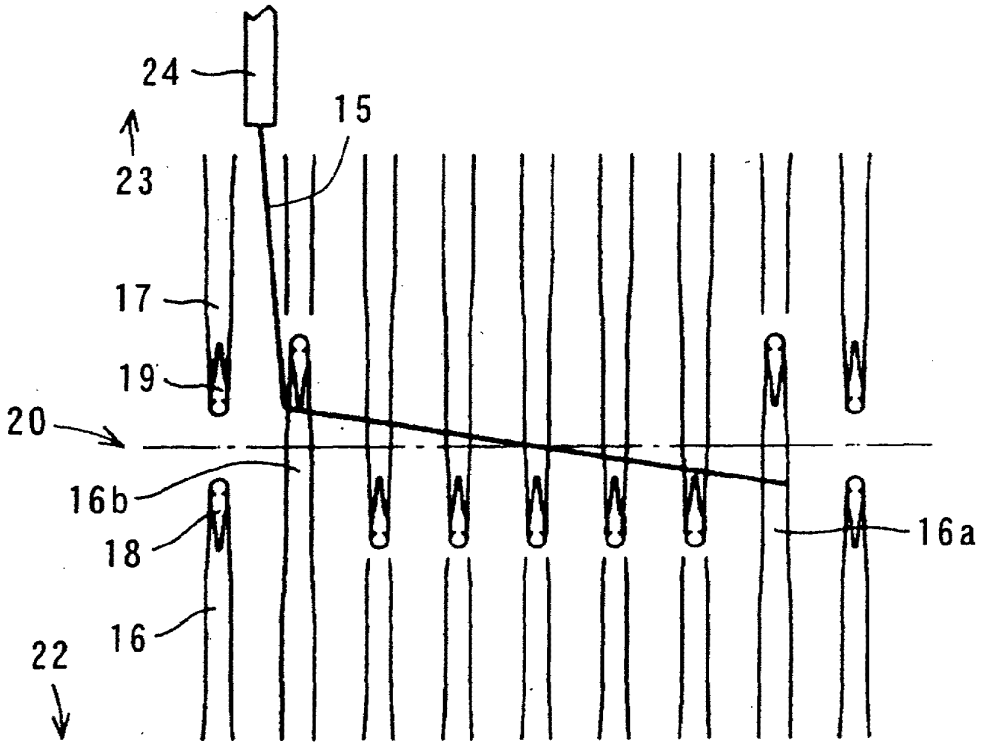

Skechers EX1013-p. 419
Skechers v Nike

FIG. 2

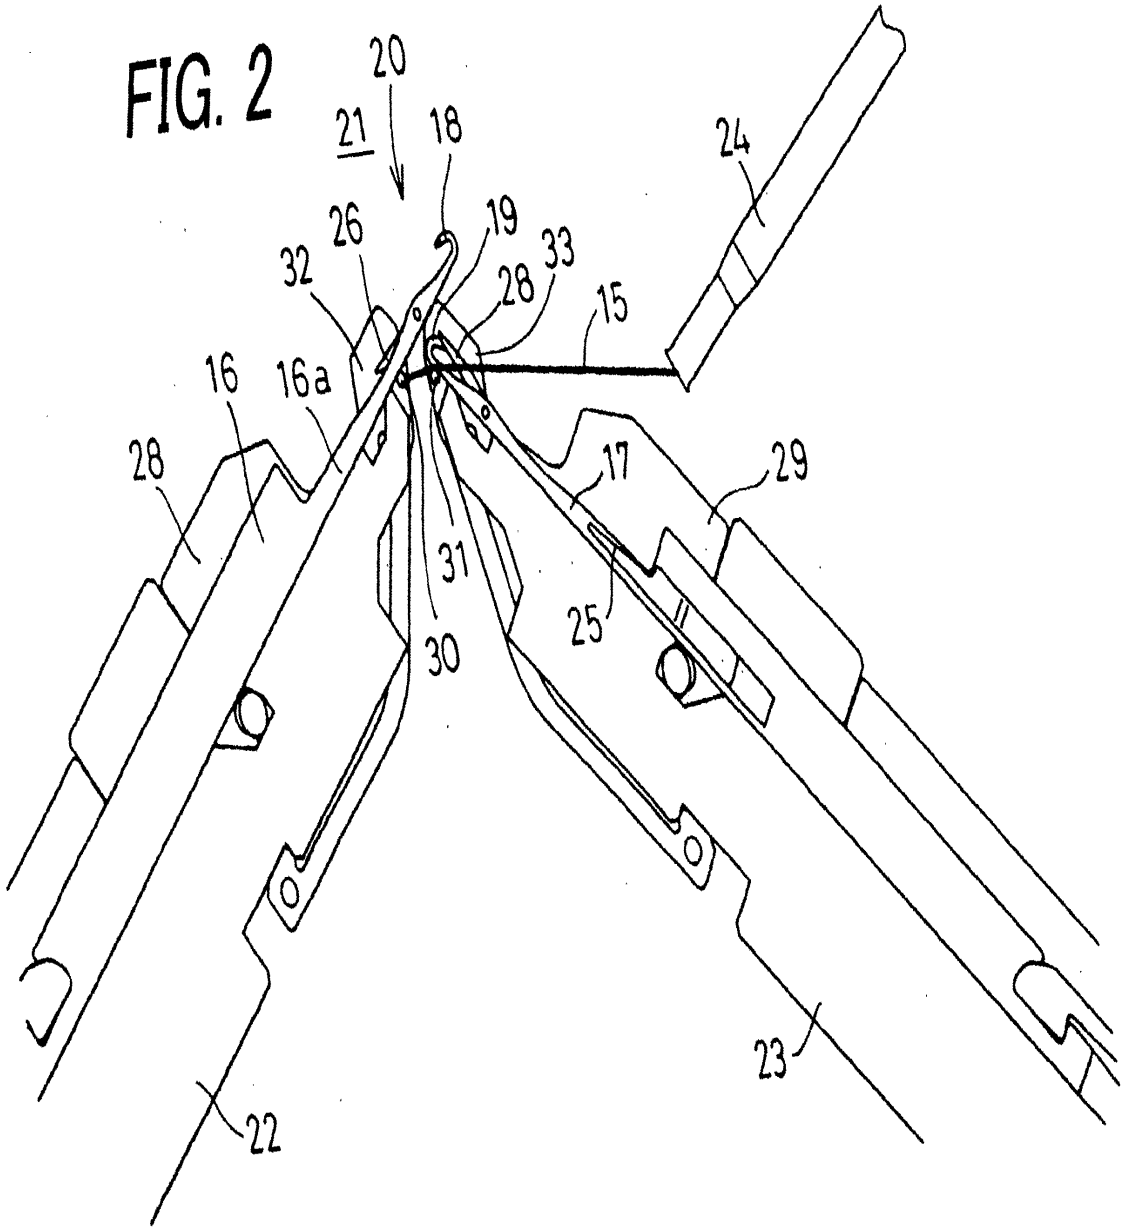

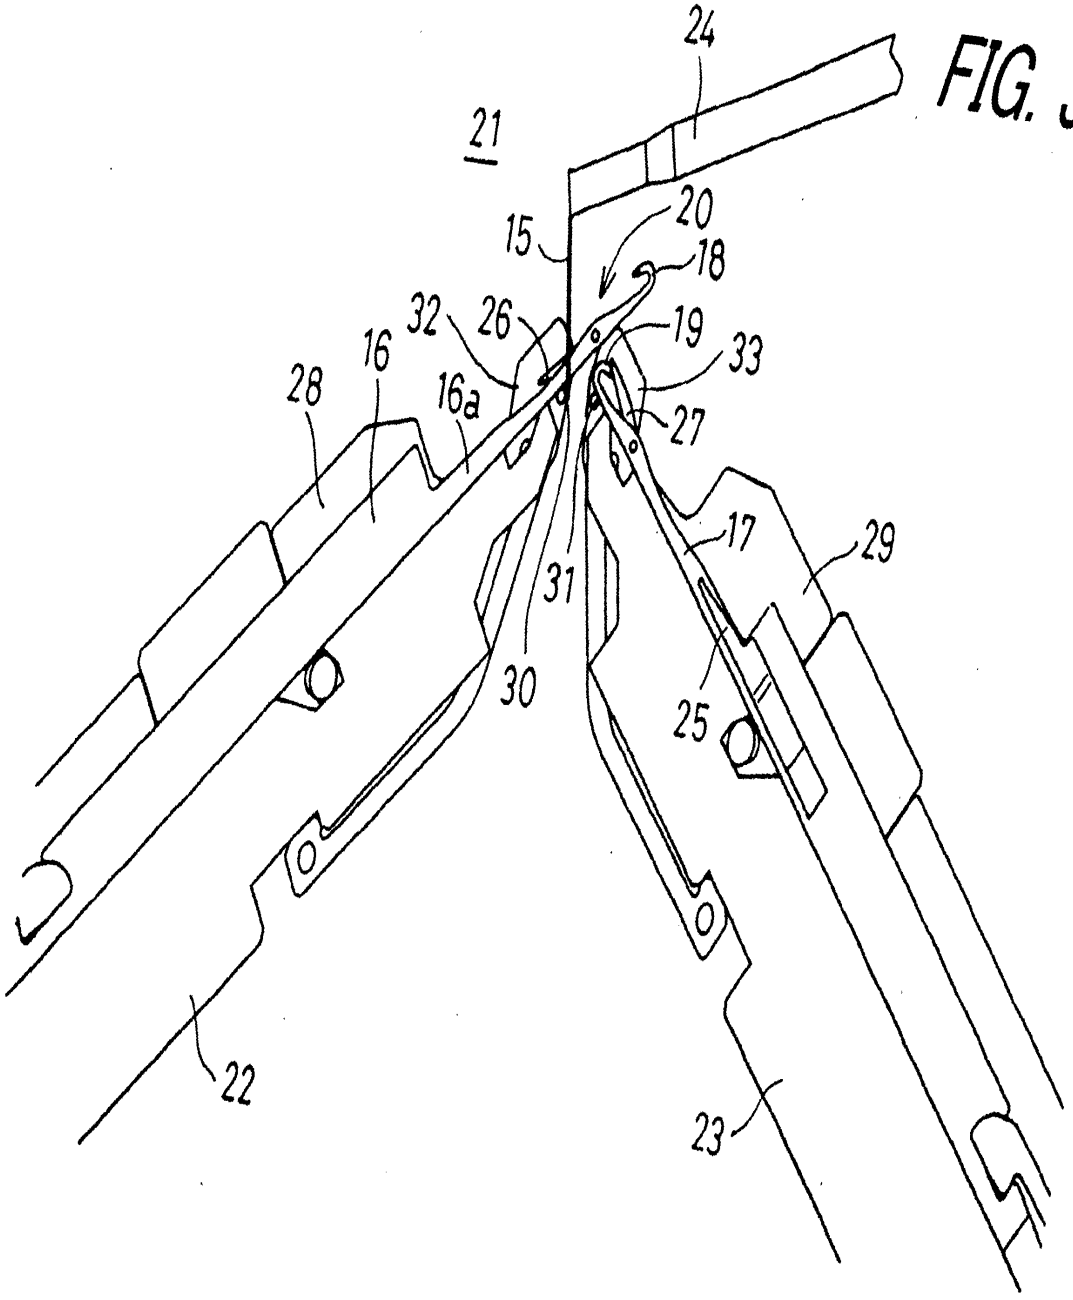


FIG. 3

EP 1 972 706 A1

FIG. 4

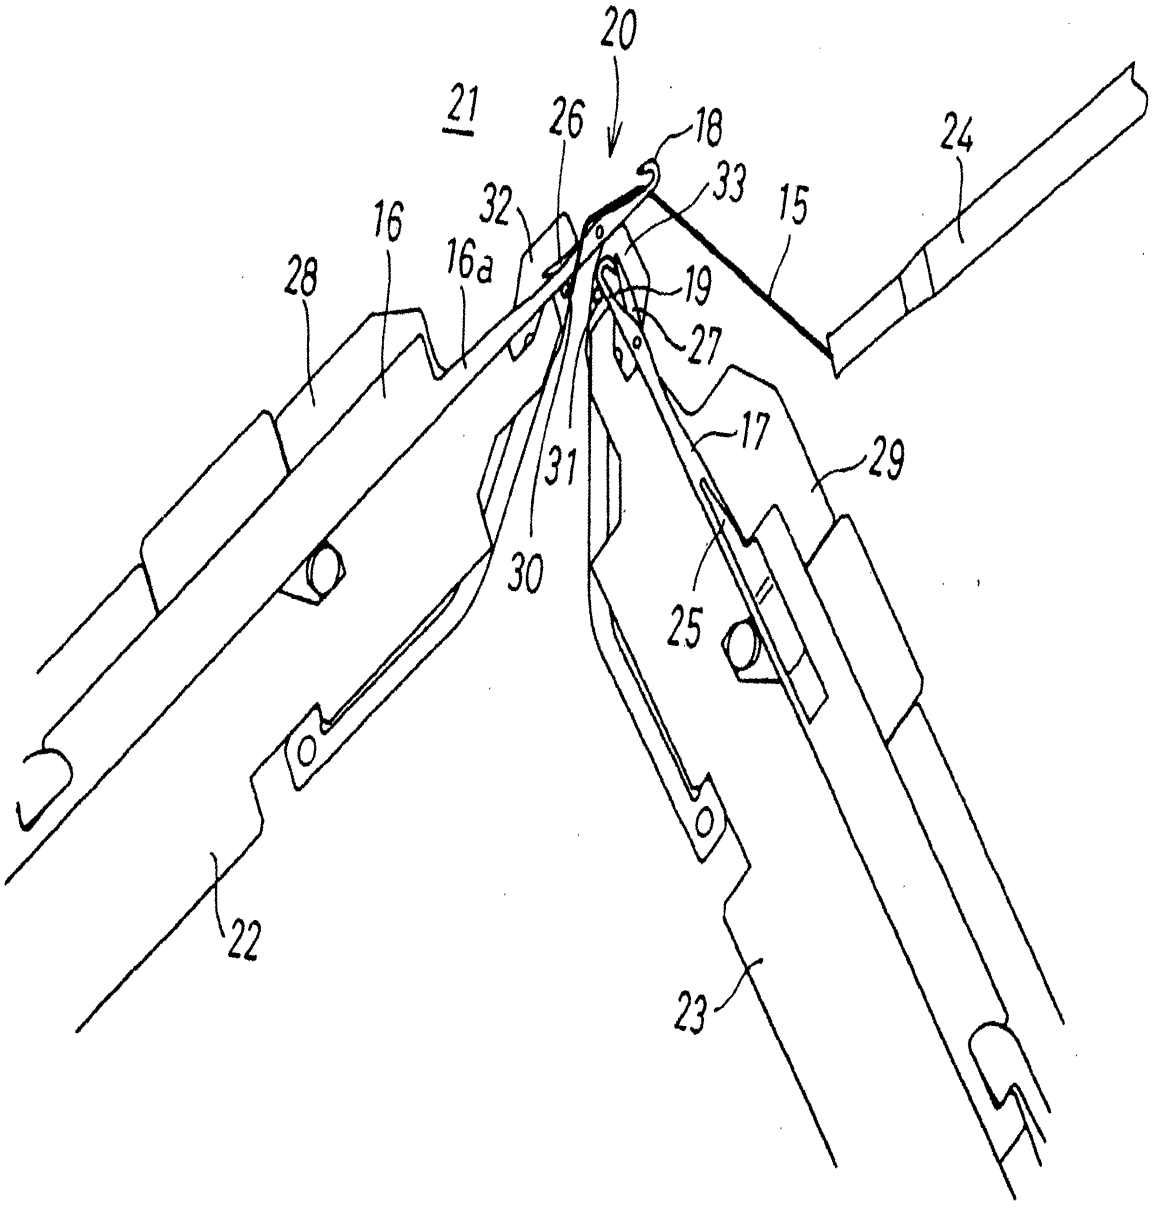


FIG. 5



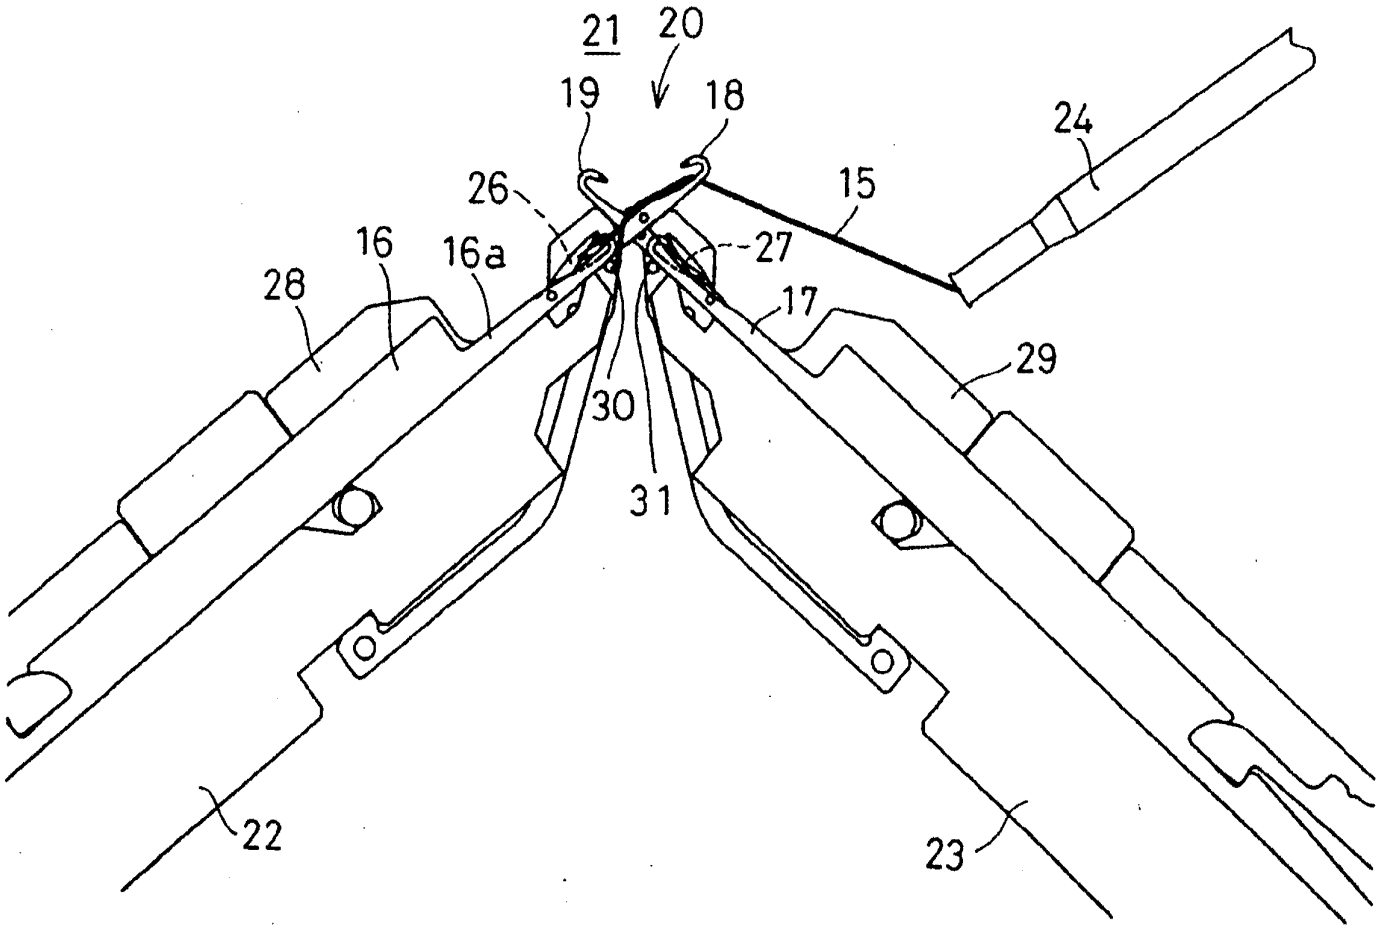


FIG. 6

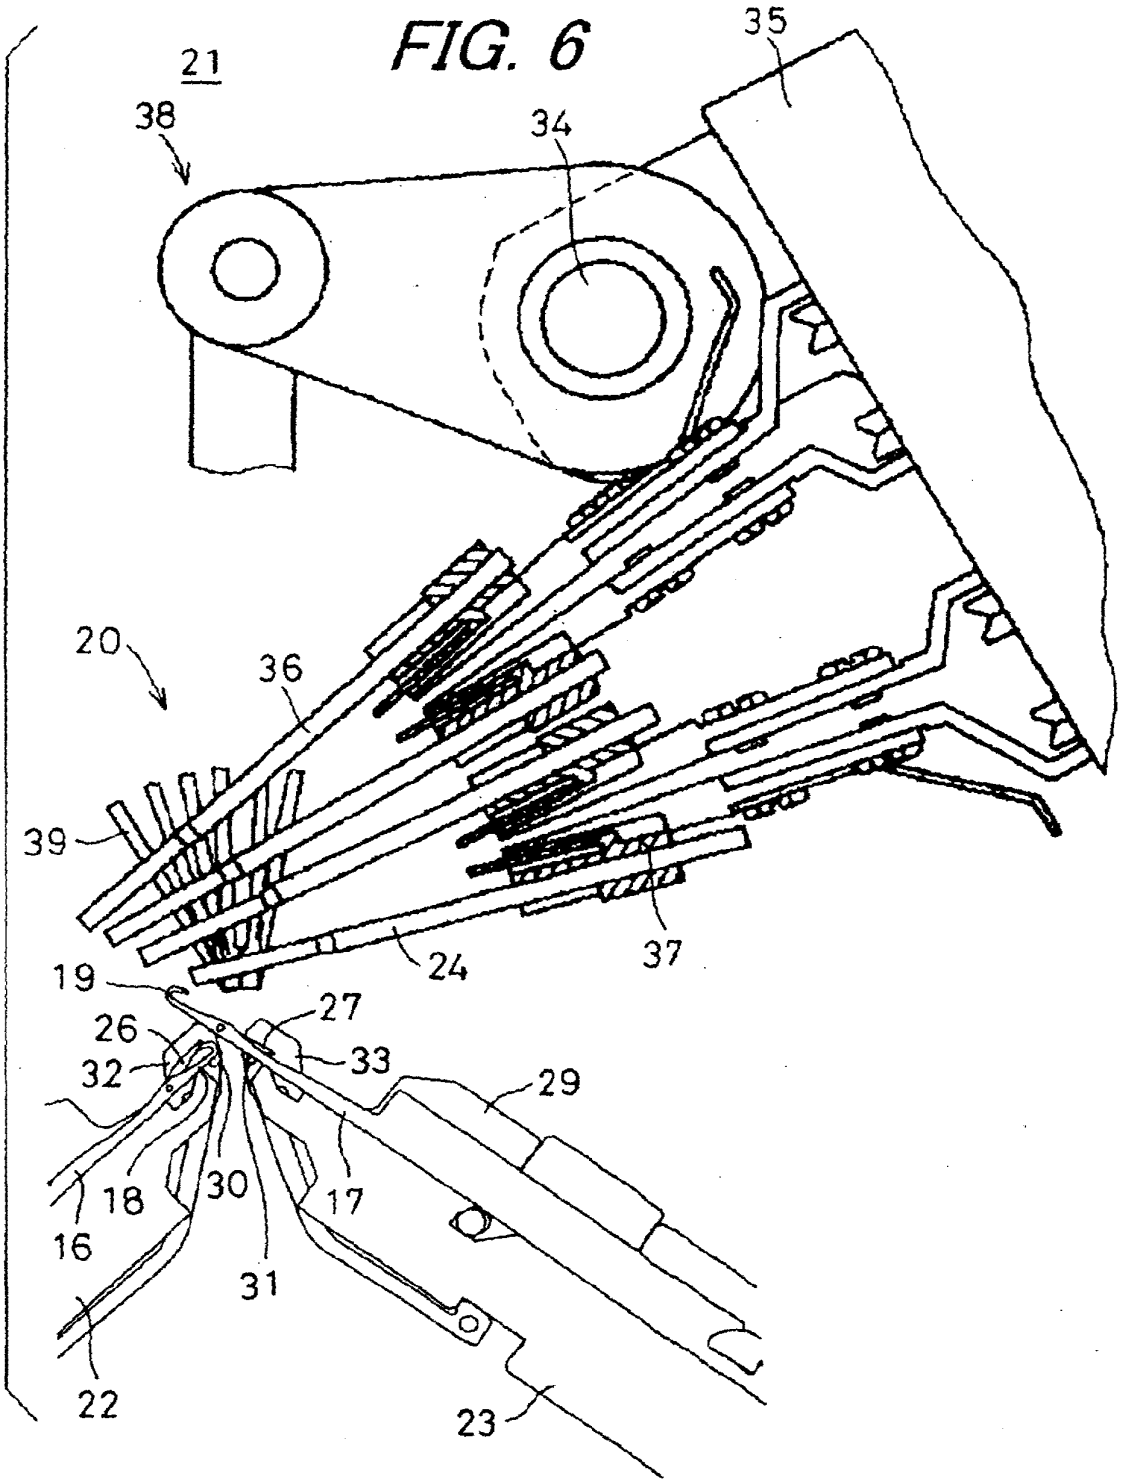

Skechers EX1013-p. 424
Skechers v Nike

FIG. 7

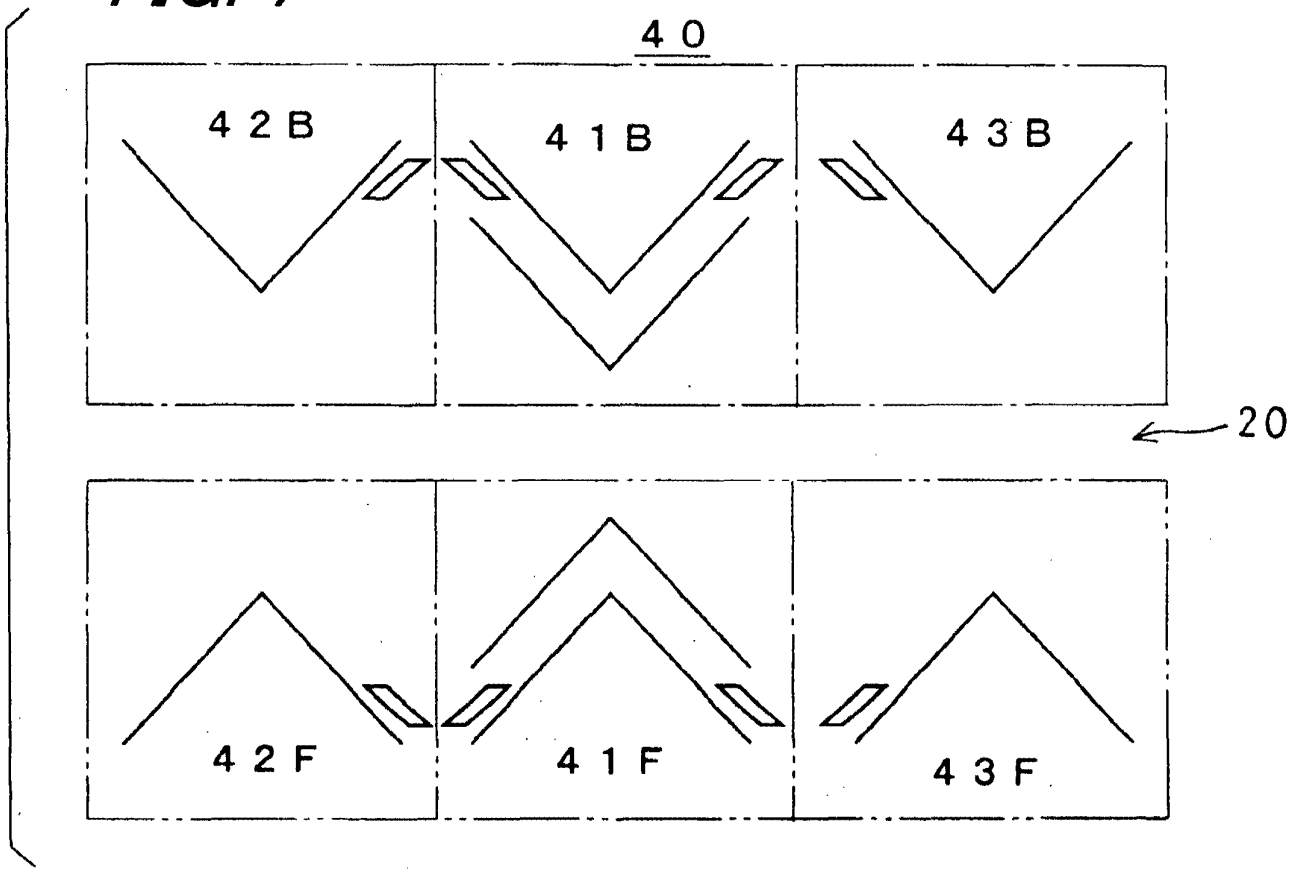

Skechers EX1013-p. 425
Skechers v Nike

FIG. 8





43B
(←)
18
50B
26
50Ba
54B
52B
51B
16
20
51F
52F
50Fa
53a
53b
54F
46
53
45
50F
43F

FIG. 9



Skechers EX1013-p. 427
Skechers v Nike

FIG. 10

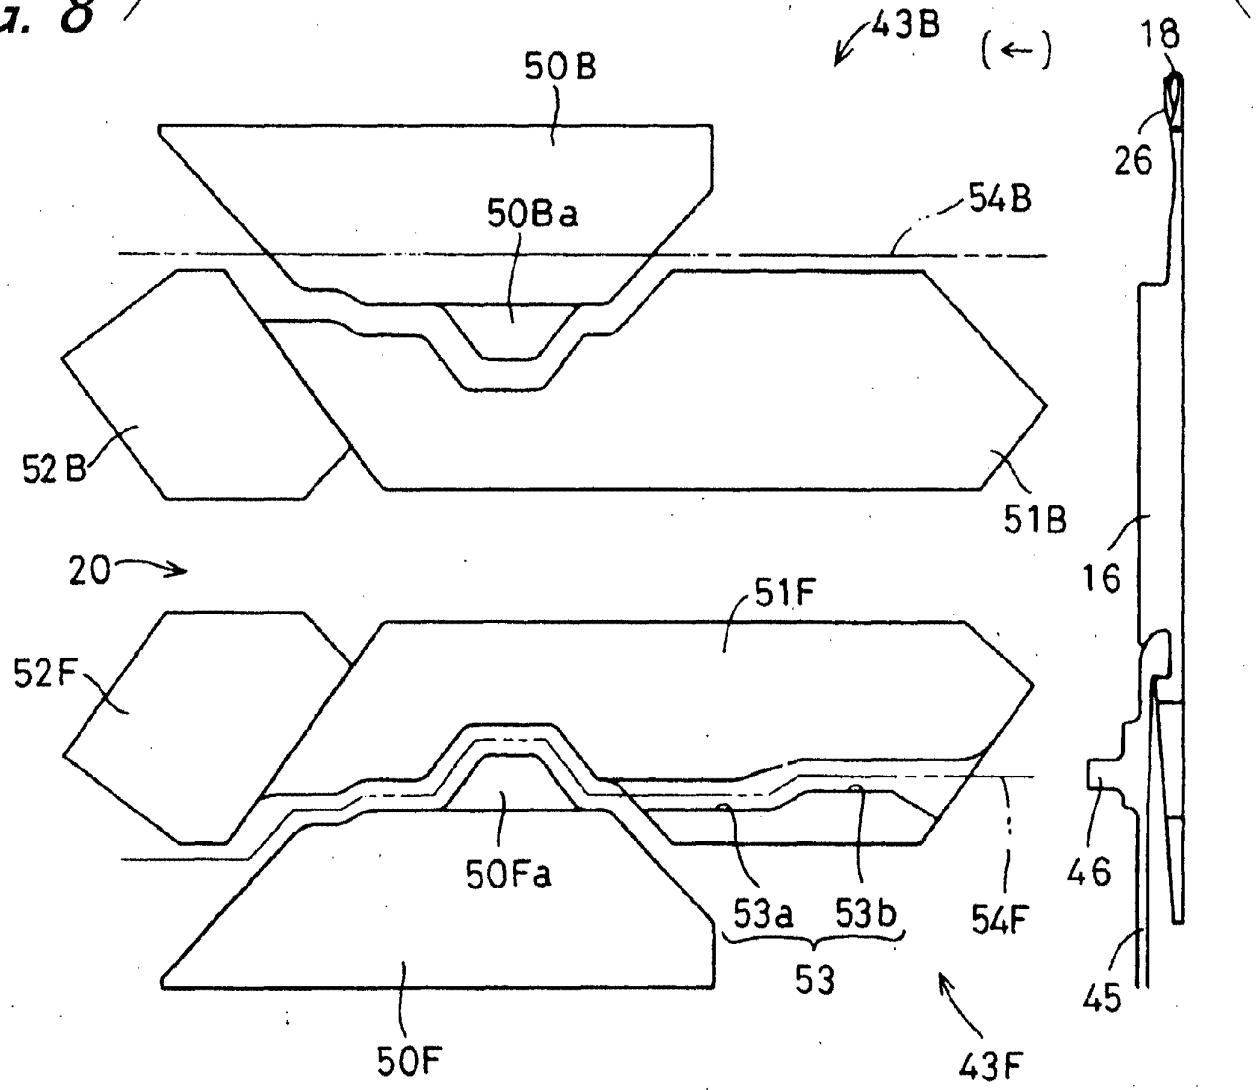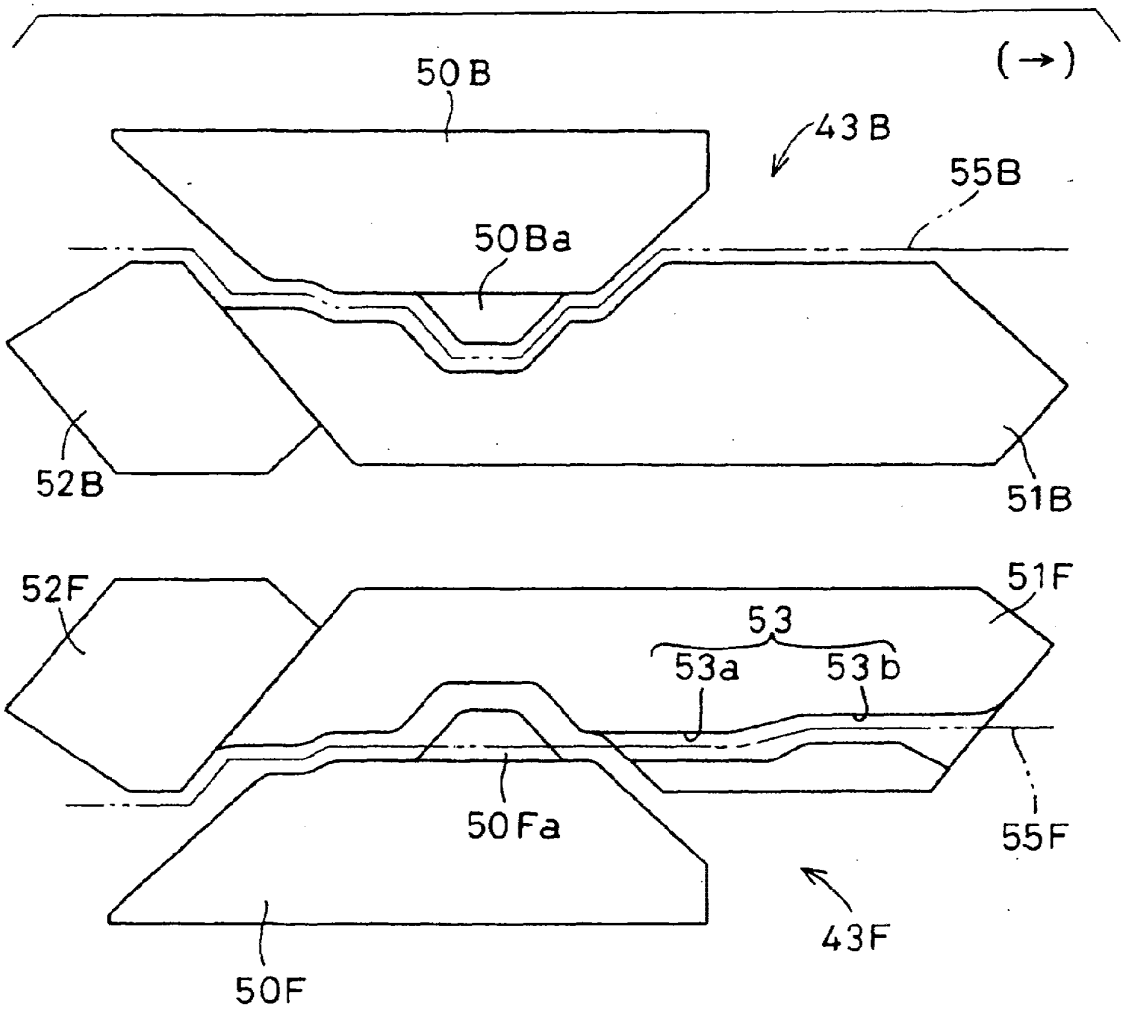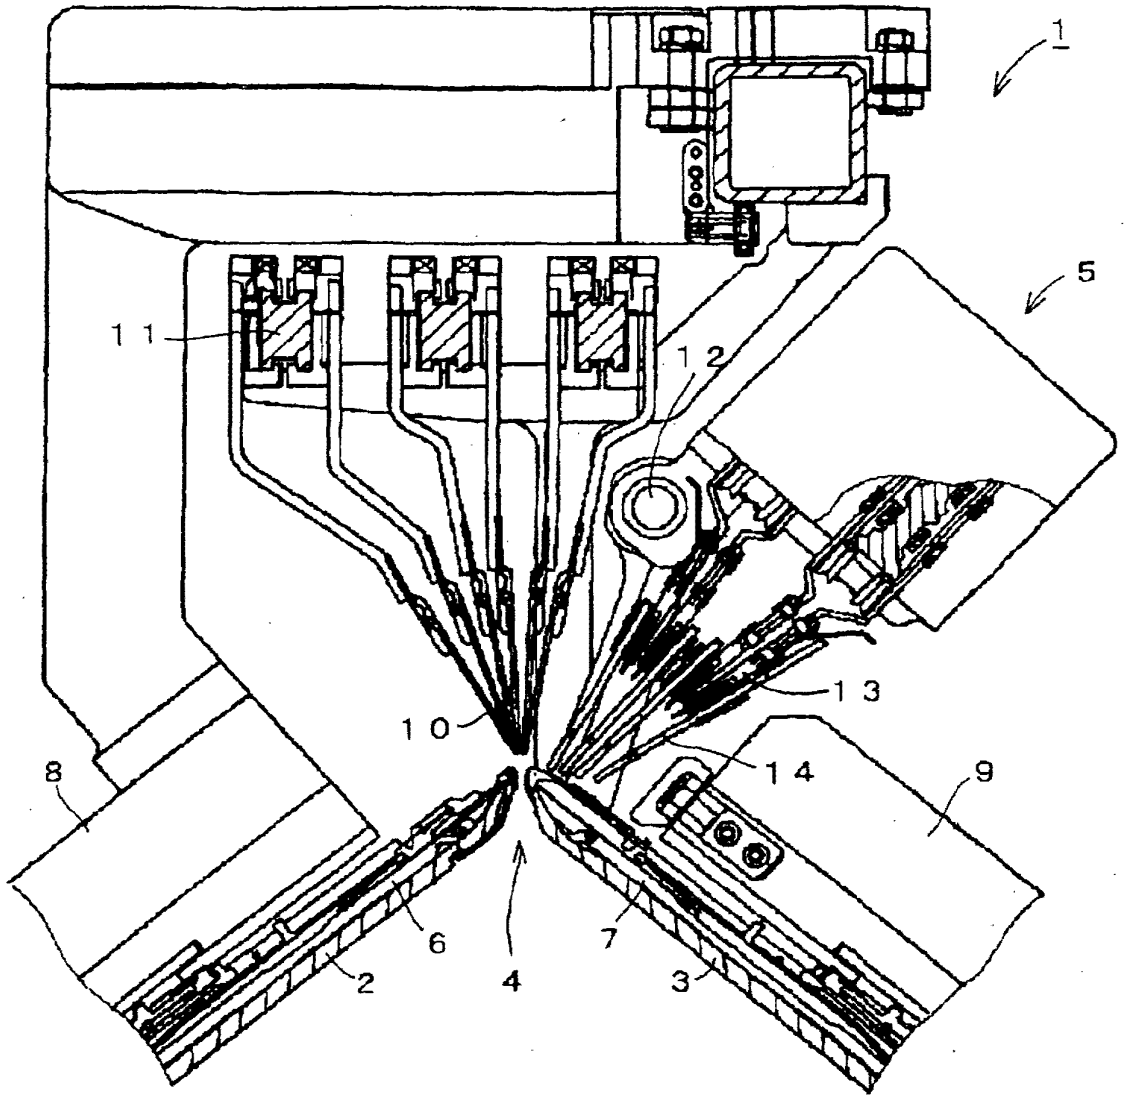

Skechers EX1013-p. 428
Skechers v Nike

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP2006/322889

A. CLASSIFICATION OF SUBJECT MATTER
D04B7/14(2006.01)i, *D04B15/56*(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
D04B7/12-7/18, D04B15/56

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1922-1996	Jitsuyo Shinan Toroku Koho	1996-2006
Kokai Jitsuyo Shinan Koho	1971-2006	Toroku Jitsuyo Shinan Koho	1994-2006

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	JP 3452639 B2 (Shima Seiki Mfg., Ltd.), 29 September, 2003 (29.09.03), & US 5544502 A & EP 682133 A1 & DE 69503831 C & KR 161162 B	1 2-5
A	JP 51-42225 B2 (Kabushiki Kaisha Shima Idea Center), 15 November, 1976 (15.11.76), (Family: none)	2-5
A	JP 34-4254 Y1 (Toshiro SUMIDA), 27 March, 1959 (27.03.59), (Family: none)	2-5
A	JP 2005-290572 A (Shima Seiki Mfg., Ltd.), 20 October, 2005 (20.10.05), & WO 2005/95697 A1	2-5

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search 30 November, 2006 (30.11.06)	Date of mailing of the international search report 12 December, 2006 (12.12.06)
Name and mailing address of the ISA/ Japanese Patent Office Facsimile No.	Authorized officer Telephone No.

Form PCT/ISA/210 (second sheet) (April 2005)

Skechers EX1013-p. 429
Skechers v Nike

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3452639 B **[0002]**
- JP 8874146 A **[0004]**
- JP 8074146 A **[0004] [0004] [0004]**

Skechers EX1013-p. 430
Skechers v Nike

(12) UK Patent Application (19) GB (11) 2 018 837 A

(21) Application No **7909437**
(22) Date of filing **16 Mar 1979**
(23) Claims filed **16 Mar 1979**
(30) Priority data
(31) **3902/78**
(32) **12 Apr 1978**
(33) **Switzerland (CH)**
(43) Application published **24 Oct 1979**
(51) **INT CL²** **D048 7/26**
(52) Domestic classification **D1C** 1B
(56) Documents cited
GB 878691
GB 671932
GB 366991
(58) Field of search **D1C**
(71) Applicants
Edouard Dubied & Cie (Societe Anonyme), 2108 Couvet, Switzerland.
(72) Inventor
Michel Patthey
(74) Agents
Mathys & Squire

(54) **A flat knitting machine for the production of Intarsia knitwear**

(57) A flat knitting machine for the production of Intarsia knitwear comprises a knitting carriage, guide bars for the thread guides and a control device for the thread guides, each thread guide comprising a plunger-type thread feeder.

Associated with each guide bar is a control device, rigidly connected to the knitting carriage and cooperating with at least one thread guide, consisting of a cam (1) comprising at least three different dip levels (8, 12, 10) and actuating the plunger type thread feeders situated on its passage, regardless of the direction of displacement of the knitting carriage.

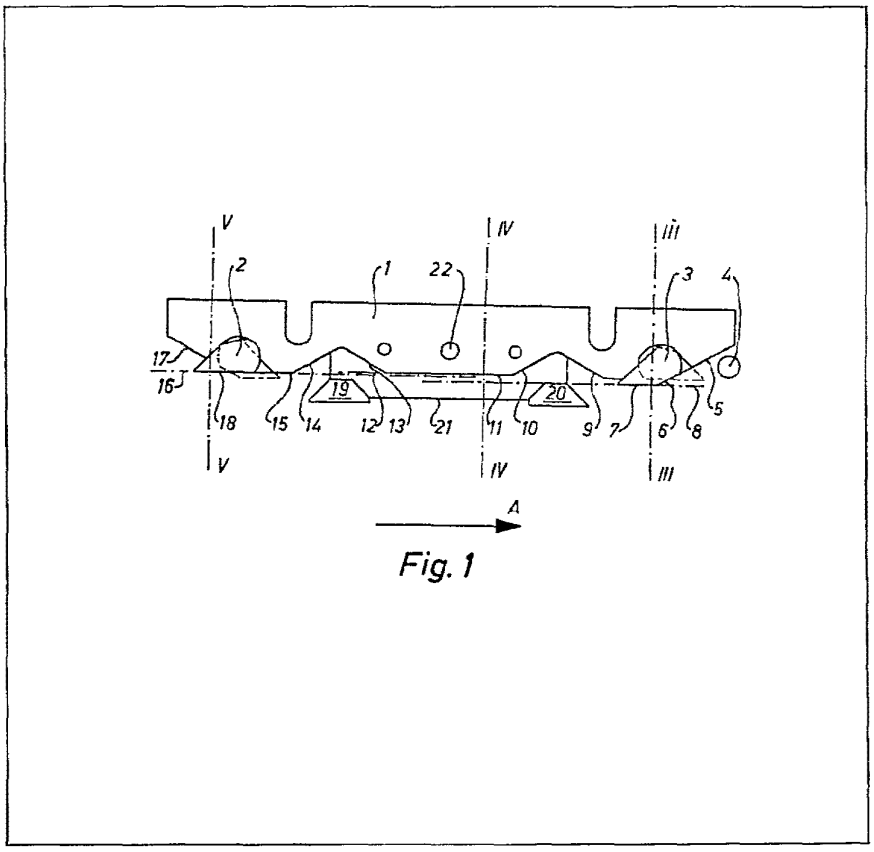


Fig. 1

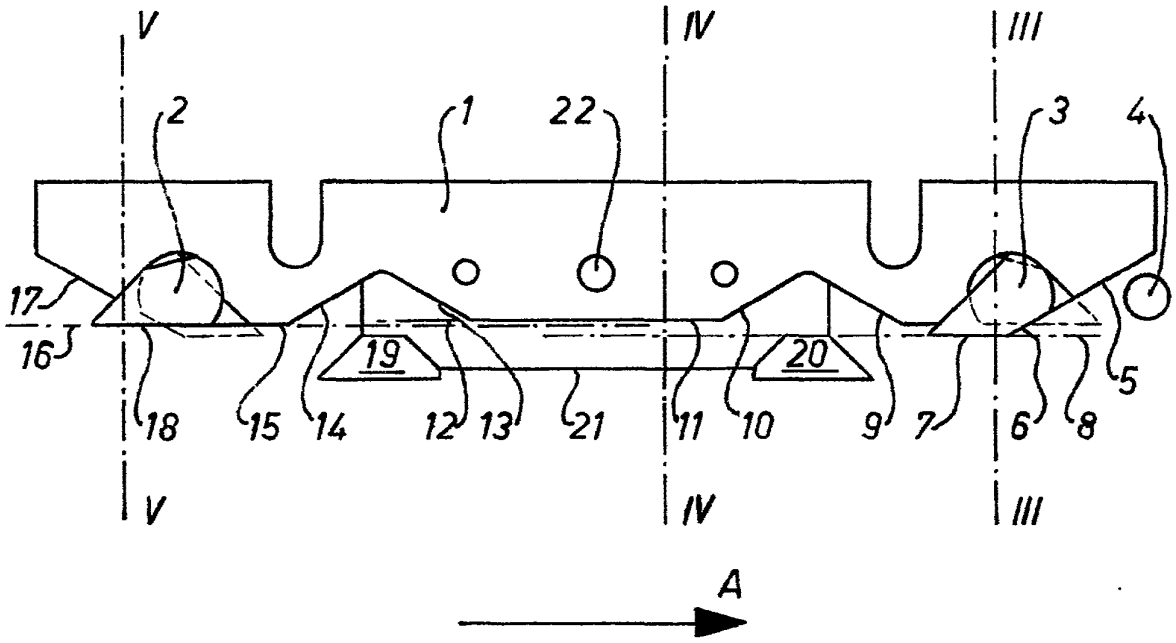

V
IV
III
2
1
22
3
4
17
16
19
20
5
18
15
14
12
13
21
11
10
9
7
6
8
V
IV
III
A

Fig. 1

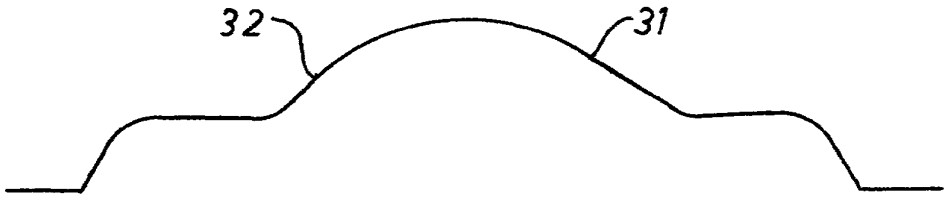

32
31

Fig. 6

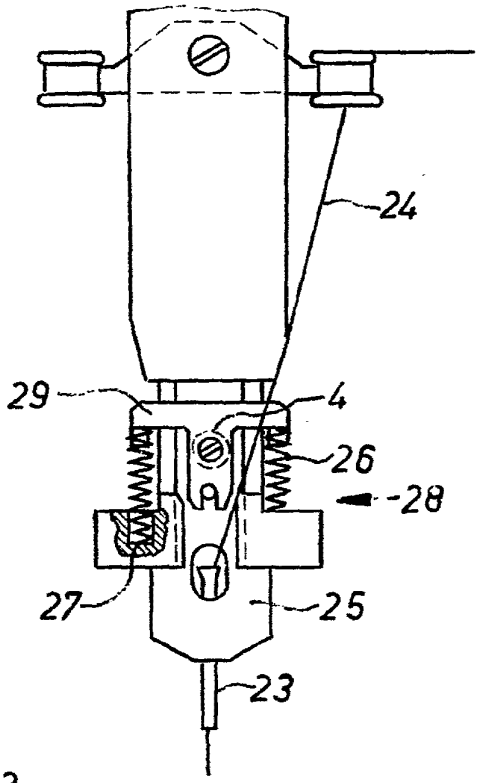


Fig. 2

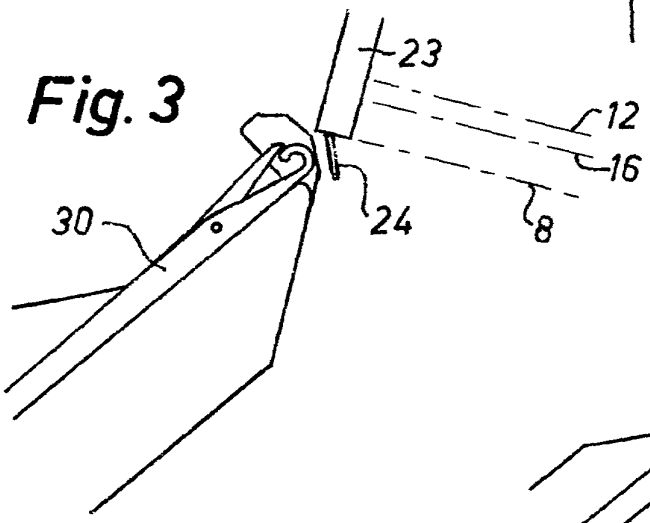


Fig. 3

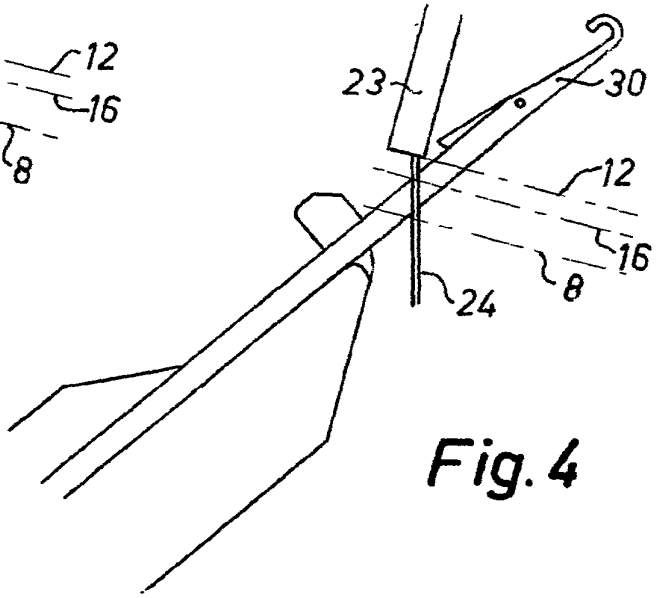


Fig. 4

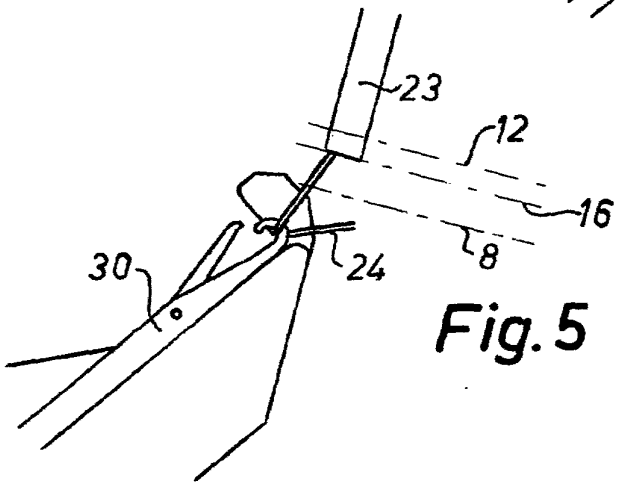


Fig. 5

SPECIFICATION

A flat knitting machine for the production of Intarsia knitwear

The present invention relates to a flat knitting machine for the production of Intarsia knitwear, and is concerned more particularly with a knitting machine of the kind comprising a knitting carriage, guide bars for the thread guides, said thread guides each comprising a plunger-type thread feeder, and a control device for the thread feeders.

Knitting machines of this kind are already known, such as that described in the German Patent DT-AS 2 459 693. Nevertheless, this Patent restricts the effectiveness of the plunger-type thread feeders to waiting at the end of travel to permit them to pick up a thread. It is actually a question of a machine comprising a device acting on thread guides driven by a knitting carriage and having no means of acting on the thread guides temporarily out of action.

The object of the present invention is to provide a simple device, easily adaptable to existing machines, permitting the production of Intarsia patterns, even with looped yarns, acting on all the thread guides used in the article to be knitted, regardless of whether they are in action or not in the row of knitting in question, in such a manner as to permit the production of Intarsia patterns, even if they are separated from one another, without the floating threads being able to be a hindrance in production.

According to the present invention there is provided a flat knitting machine of the kind described, wherein a control device is associated with each guide bar, and each control device is rigidly connected to the knitting carriage and cooperates with at least one thread guide.

The accompanying drawings illustrate, by way of example, one form of embodiment of the invention in which,

Figure 1 is the front view of the device for controlling the thread feeders,

Figure 2 is a partial front view of a thread guide,

Figure 3 is a diagrammatic view of the position of a guide tube in relation to the needles on III-III in Figure 1,

Figure 4 is a diagrammatic view of the position of a guide tube in relation to the needles on IV-IV in Figure 1,

Figure 5 is a diagrammatic view of the position of a guide tube in relation to the needles on V-V in Figure 1,

Figure 6 shows a curve of the rise and fall of the needles in relation to the cam of Figure 1.

The device for controlling the thread feeders, illustrated in Figure 1, comprises a cam 1 equipped with pivoting tongues 2, 3. This cam, which is rigidly connected to a known knitting carriage, not illustrated, by means which are likewise known and not illustrated, is displaced with said knitting carriage in a backward and forward movement. For the description, we assume that the knitting carriage is being displaced from left to right in the drawing, in the direction indicated by the arrow A. The cam 1 cooperates with a cam follower in the form of a stud 4, rigidly connected to each thread feeder, as described in connection with Figure 2.

The cam 1 comprises a first inclined ramp 5 extended by a ramp 6 of the pivoting tongue 3 which comprises a face 7 situated at a dip level 8. The cam 1 also comprises a rising ramp 9, a descending ramp 10, a face 11 forming a dip level 12, a rising ramp 13, a descending ramp 14, a face 15 forming a dip level 16 and a ramp 17. The pivoting tongue 2 comprises a face 18 situated in the extension of the face 15 and at the dip level 16. Safety cams 19, 20, rigidly connected to a plate 21 fixed to the cam 1 by fixing means 22, guarantee a rising movement of the stud 4 during its displacement over the profile of the cam 1, defined by the above-mentioned ramps and faces. During a displacement of the carriage in the opposite direction to the arrow A, the tongues are displaced by the stud 4 and assume the positions indicated in dotted lines. The geometry of the cam and consequently that of the path of the stud 4 is similar, seen in the direction of displacement of said stud, to that described above.

The thread guide illustrated in Figure 2 comprises a tube 23 into which the thread 24 fits. Said tube is rigidly connected to a slide 25 behind which the stud 4 is fixed. Under the effect of the compression springs 26 bearing on the one hand against an abutment 27 rigidly connected to the thread feeder 28 and on the other hand against the end 29 of the slide 25, said thread feeder is always restored to the high position.

The cam 1, of Figure 1, acts on the stud 4, against the action of the springs 26.

The function of the different dip levels 8, 12, 16 is described with reference to Figures 3, 4 and 5.

The diagrammatic view of Figure 3 is a partial cross-section of the needle beds, on III-III in Figure 1, showing the position of the tube 23 in relation to the needles 30 of a needle bed, when the stud 4 of the thread feeder 28 is at the dip level 8 defined by the face 7 of the cam 1. In this phase of the descent, it is a question of positioning the thread 24 with precision between two adjacent needles 30, at the lowest level to permit the raised needle to pass above the thread. This position is the more important the greater the distance separating two fields of work of the same colour, knitted with the same thread feeder, to guarantee the position of the thread 24 below the needle during long displacemement of the thread feeders, whichs has led to the appearance of long floating threads.

The partial cross-section on IV-IV of Figure 1, illustrated in Figure 4 shows the position of the tube 23 in relation to the needles 30, when the stud 4 of the thread feeder 28 is at the dip level 12 defined by the face 11 of the cam 1. It is a question of positioning the tube 23 between two needles in such a manner that it is low enough for the closed latch of the needle not to prick into the thread during the last rising phase 31 of the needle (Figure 6), and then, for the open latch not to be closed by a fibril or loop of this thread during the first phase 32 of clearing the knitting cam system of the needle (Figure 6), which would inevitably lead to a dropped loop in the

knitting.

The partial cross-section on V-V of Figure 1 illustrates the relative positions of the tube and of the needle when the stud 4 is at the dip level 16 defined by the face 18 of the cam 1. Here it is a question of keeping the thread feeder in a sufficiently low position, guaranteeing the placing of the thread in the hook long enough for the thread not to be able to escape from said hook before it is held by the closed latch.

Figure 6 disposed opposite Figure 1, illustrates the position of the rise curve of the needles in relation to the cam 1. It should be noted that the descending movements of the thread feeder take place when the latter is stopped.

The drive of the thread feeder by the carriage, in a conventional manner not described within the scope of this invention, takes place when the stud 4 arrives at the top of the ramp 13. Said stud will remain in this position until the thread feeder arrives at the end of its travel. From then on, the stud follows the profile of the cam 1 defined by the ramp 14, the face 18 and the ramp 17.

A distinction must be made between the cases of two thread feeders, working or out of operation. The thread feeder which is not to be brought into operation during the knitting of the row in question will not remain at the top of the ramp 13 and will continue its descending movement controlled by the ramp 14. It is absolutely essential that the thread feeders out of operation should follow the same descending movements, in order to avoid errors in knitting which could appear if the thread guided by these thread feeders were in the path of the rising needles.

In this device, the ramps 9 and 10 only function in the opposite direction to the displacement of the carriage. They position the thread feeder so as to be high enough to be able to be entrained by the carriage without coming into contact with the needles.

Thus the knitter has a simple machine at his disposal without any limitation, enabling him to produce all the types of Intarsia patterns. This machine would comprise as many devices as shown in Figure 1 as it comprises guide bars for the thread guides.

CLAIMS:

1 A flat knitting machine for the production of Intarsia knitwear, comprising a knitting carriage, guide bars for the thread guides, said thread guides each comprising a plunger-type thread feeder, and a control device for the plunger-type thread feeders, characterised in that, associated with each guide bar is a control device, and that each control device is rigidly connected to the knitting carriage and cooperates with at least one thread guide.

2. A knitting machine as claimed in claim 1, characterised in that the control device is a cam operating alternately in one direction or in the other of the displacement of the knitting carriage.

3. A knitting machine as claimed in claim 2, characterised in that the cam (1) comprises at least three different levels of dip (8, 12, 16) acting on a stud (4) of the thread feeders (28) out of action and at least one intermediate position afforded by the intersection of ramps (13, 14 and 9, 10 respectively) positioning said stud (4) during a simultaneous displacement of the knitting carriage and of a thread guide.

4. A knitting machine as claimed in claim 3, characterised in that the cam (1) comprises at least two tongues (2, 3) which can be orientated into two distinct positions, by the stud (4) according to the direction of displacement of the knitting carriage and in that the two distinct positions of each tongue form two different levels of dip (8, 16).

5. A flat knitting machine for the production of Intarsia knitwear, substantially as hereinbefore described with reference to the accompanying drawings.

Printed for Her Majesty's Stationery Office by Croydon Printing Company Limited, Croydon Surrey, 1979.
Published by the Patent Office, 25 Southampton Buildings, London, WC2A 1AY, from which copies may be obtained.

DECLARATION OF DR. EDWARD C. FREDERICK

I. Background and Qualifications

1. I, Dr. Edward C. Frederick, make this declaration in connection with the petition by adidas AG ("adidas") for *Inter Partes* Review of U.S. Patent No. 7,347,011 ("the '011 Patent") owned by Nike, Inc.

2. I make this declaration based upon personal knowledge. I am over age 21 and otherwise competent to make this declaration.

3. The statements herein include my opinions and the bases therefore, which relate to the '011 Patent and various prior art references that disclose features found in the claims of the '011 Patent. Although I am being compensated for my time at a rate of $250 per hour in preparing this declaration, the opinions herein are my own, and I have no stake in the outcome of the review proceeding, My compensation does not depend in any way on the outcome of adidas's petition.

4. I am President of Exeter Research, Inc. in Brentwood, New Hampshire. I have more than thirty years of experience in the sporting goods industry, including extensive experience in footwear design and biomechanics, as well as footwear development and manufacturing. Further, I am an active researcher in footwear biomechanics and have published more than one hundred articles in international journals, books and conference proceedings. In addition, I

am inventor or a co-inventor on 16 issued patents including 10 U.S. utility patents relating to footwear.

5. I have been intimately involved with the creation of more than two-dozen new products over the years and have supervised the design and development of hundreds of new products. This experience encompasses doing the background research to come up with new concepts, developing the product concepts, writing design briefs, creating designs, writing specifications, developing tech packages, managing the step-by-step development of the product, commercializing the product, managing production trials, and hands-on testing as well as managing the testing of the product and its components and materials. The choice of materials, constructions and processes, has been an important part of that experience.

6. A copy of my *curriculum vitae* is attached hereto, and it includes a listing of prior experience as an expert in litigation and patent reexamination matters.

II. Materials Reviewed

7. In forming my opinions, I have reviewed (i) the '011 Patent and its prosecution history that is available on the U.S. Patent Office website; and (ii) prior art to the '011 Patent, including (a) U.S. Patent No. 2,147,197 to Glidden; (b) U.S. Patent No. 2,314,098 to McDonald; (c) U.S. Patent No. 2,641,004 to Whiting;

Petitioner adidas AG - Exhibit 1001 - Page 2

Skechers EX1013-p. 437
Skechers v Nike

(d) U.S. Patent No. 4,785,558 to Shiomura; (e) U.S. Patent No. 5,345,638 to Nishida; (f) PCT International Publication No. WO 90/03744 to Curley; (g) Japanese Patent Publication No. H6-113905 to Osamu Daimaru (including an English translation thereof); and (h) the reference text "Knitting Technology: A comprehensive handbook and practical guide," 3rd edition, by David J. Spencer, published in 2001. I understand the prior art references identified above will be included with the petition for *inter partes* review filed with the U.S. Patent Office.

III. Person of Ordinary Skill in the Art of the '011 Patent

8. Counsel for adidas has informed me that the content of a patent or other printed publication (*e.g.*, prior art reference) should be interpreted the way a person of ordinary skill in the art would have interpreted the reference at the time the application for the '011 Patent was filed in the United States – March 3, 2004.

9. In my opinion, the person of ordinary skill in the art for the '011 Patent would have at least several years' experience with all aspects of shoemaking from the conceptual stage through design, development, commercialization, and manufacturing. The cycle of design and development of a new footwear product takes roughly 18 months and there are seven or more decision points during this cycle where the choice of upper materials and production processes are addressed. The person of ordinary skill has been through many and varied product cycles with projects representing a typical range constructions. In addition, a person of

ordinary skill in the art would have basic knowledge of the functional requirements of footwear and a comprehensive understanding of the range of material choices, as well as construction techniques and processes used to create the various parts of a shoe and to assemble them in a proper manner.

10. I have been asked by adidas's counsel to assume that the person of ordinary skill is a hypothetical person who is assumed to be aware of all the pertinent information that qualifies as prior art. In addition, the person of ordinary skill in the art makes inferences and creative steps. He or she is not an automaton, but has ordinary creativity.

11. Based on my experience, I have an understanding of the capabilities of the skilled person in this field, and my opinions are provided from the perspective of such a person.

IV. Standards for Claim Construction, Anticipation, and Obviousness

12. I understand from counsel for adidas that, in a review proceeding, the claims are to be given their broadest reasonable construction consistent with the patent specification. I also understand that limitations from the specification are not to be read into the claims.

13. Counsel for adidas has informed me that a patent claim is invalid as anticipated (i.e., invalid under 35 U.S.C. § 102) if every limitation of a claim is found identically (either expressly, implicitly, or inherently) in a reference. A

reference inherently discloses the subject matter that a person of ordinary skill in the art would have recognized as necessarily being present in the subject matter disclosed in the reference.

14. Counsel for adidas has also informed me that, by law, a patent may not be obtained though the invention is not identically disclosed or described as set forth in a prior art reference, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious (i.e., invalid under 35 U.S.C. § 103) at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains.

15. I have also been informed that, in order for a patent claim to have been obvious, there should be a reasoned explanation as to why collectively the prior art references would have rendered the claimed invention obvious. Depending on the real-world context of the invention described in a patent, various factors or reasons can suffice as a reason to modify or combine the subject matter disclosed in prior art references.

16. These factors and reasons include the following: (a) obvious to try – choosing from a finite number of identified, predictable solutions, with a reasonable expectation of success, (b) common sense, (c) combining or substituting known elements from the prior art to obtain predictable results, (d)

Petitioner adidas AG - Exhibit 1001 - Page 5

Skechers EX1013-p. 440
Skechers v Nike

ordinary creativity, (e) whether the need or problem addressed by the patent was known in the prior art, (f) use of known techniques to improve similar devices in the same way, (g) a teaching, suggestion, or motivation, either in the references themselves or in the knowledge generally available to one of ordinary skill in the art, to modify a reference or combine reference teachings, and (h) when a work is available in one field of endeavor, design incentives and other market forces can prompt variations of it, either in the same field or a different one. I understand that these factors are identified in the U.S. Supreme Court's decision in *KSR v. Teleflex*.

17. I understand that the Patent Office follows its published guidelines for determining whether a patent claim would have been obvious at the time the invention was made to a person of ordinary skill in the art. Those guidelines are in the Patent Office's "Examination Guidelines for Determining Obviousness Under 35 U.S.C. 103 in View of the Supreme Court Decision in *KSR International Co. v. Teleflex Inc.*" ("*KSR* Guidelines") (http://www.uspto.gov/web/offices/pac/mpep/documents/2100_2141.htm#sect214), and I have read those guidelines and applied them below when I analyze a claim for obviousness.

18. I understand that prior art under 35 U.S.C. § 102(b) includes patents and printed publications that were available more than one year before the

effective filing date of the '011 Patent, i.e. before March 3, 2003. All of the prior art references I discuss in this declaration are prior art under § 102(b).

V. Overview of the '011 Patent

19. The '011 Patent discloses and claims an article of footwear that combines a knitted upper of unitary construction with a sole unit. The upper incorporates a textile element with edges that are joined together to create an upper with an area for receiving a foot. The textile element may also have first and second areas that are parts of a unitary construction. These first and second areas may be made with different stich configurations or different yarns, for example, so that different areas of the upper have different properties (such as, different texture, different elasticity, different breathability, etc.). Various warp knitting or weft knitting processes may be utilized to form the textile element.

20. In the section entitled "Description of Background Art," the '011 Patent explains that the use of various materials for uppers in athletic shoes is well known. For example at 1:44-2:3:

> Various materials may be utilized in manufacturing the upper. The upper of an article of athletic footwear, for example, may be formed from multiple material layers that include an exterior layer, an intermediate layer, and an interior layer. The materials forming the exterior layer of the upper may be selected based upon the properties of wear-resistance, flexibility, and air-permeability, for example. With regard to the exterior layer, the toe area and the heel area may be formed of leather, synthetic leather, or a rubber material to impart a relatively high degree of wear-resistance. Leather, synthetic leather,

Petitioner adidas AG - Exhibit 1001 - Page 7

Skechers EX1013-p. 442
Skechers v Nike

> and rubber materials may not exhibit the desired degree of flexibility and air-permeability. Accordingly, various other areas of the exterior layer of the upper may be formed from a synthetic or natural textile. The exterior layer of the upper may be formed, therefore, from numerous material elements that each impart different properties to specific portions of the upper.
>
> An intermediate layer of the upper may be formed from a lightweight polymer foam material that provides cushioning and protects the foot from objects that may contact the upper. Similarly, an interior layer of the upper may be formed of a moisture-wicking textile that removes perspiration from the area immediately surrounding the foot. In some articles of athletic footwear, the various layers may be joined with an adhesive, and stitching may be utilized to join elements within a single layer or to reinforce specific areas of the upper.

21. The '011 Patent explains, however, that textile materials often form at least a portion of the exterior and interior layers of athletic shoes (2:4-14):

> Although the materials selected for the upper vary significantly, textile materials often form at least a portion of the exterior layer and interior layer. A textile may be defined as any manufacture from fibers, filaments, or yarns characterized by flexibility, fineness, and a high ratio of length to thickness. Textiles generally fall into two categories. The first category includes textiles produced directly from webs of filaments or fibers by randomly interlocking to construct non-woven fabrics and felts. The second category includes textiles formed through a mechanical manipulation of yarn, thereby producing a woven fabric, for example.

22. The "Description of Background Art" section then briefly describes the various techniques for mechanically manipulating yarn into textiles, including weaving and knitting (2:36-46):

> The various techniques for mechanically manipulating yarn into a textile include interweaving, intertwining and twisting, and interlooping. Interweaving is the intersection of two yarns that cross

> and interweave at right angles to each other. The yarns utilized in interweaving are conventionally referred to as warp and weft. Intertwining and twisting encompasses procedures such as braiding and knotting where yarns intertwine with each other to form a textile. Interlooping involves the formation of a plurality of columns of intermeshed loops, with knitting being the most common method of interlooping.

23. The '011 Patent explains that using multiple materials to impart different properties to different parts of the upper is an inefficient practice because, for example, materials must often be obtained from multiple suppliers located in different places and different materials may require different machinery or numerous distinct manufacturing steps (2:63-3:8). In addition, the '011 Patent explains that using multiple materials in the upper may detract from breathability of the shoe, and specifically that leather, synthetic leather, and rubber inhibit air flow (3:8-16).

24. Thus, the problems that the '011 Patent identifies are (1) inefficiencies and cost in using multiple materials, and (2) poor breathability of materials like leather (natural or synthetic) and rubber. The proposed solution of the '011 Patent is to make a textile upper as a single material element with a unitary construction.

25. The '011 Patent describes several embodiments of a textile element (40, 40', 40'') in the specification and figures. One embodiment is shown in Fig. 8, and the '011 Patent describes how the parts of the textile element 40 form the upper of the shoe (5:18-34):

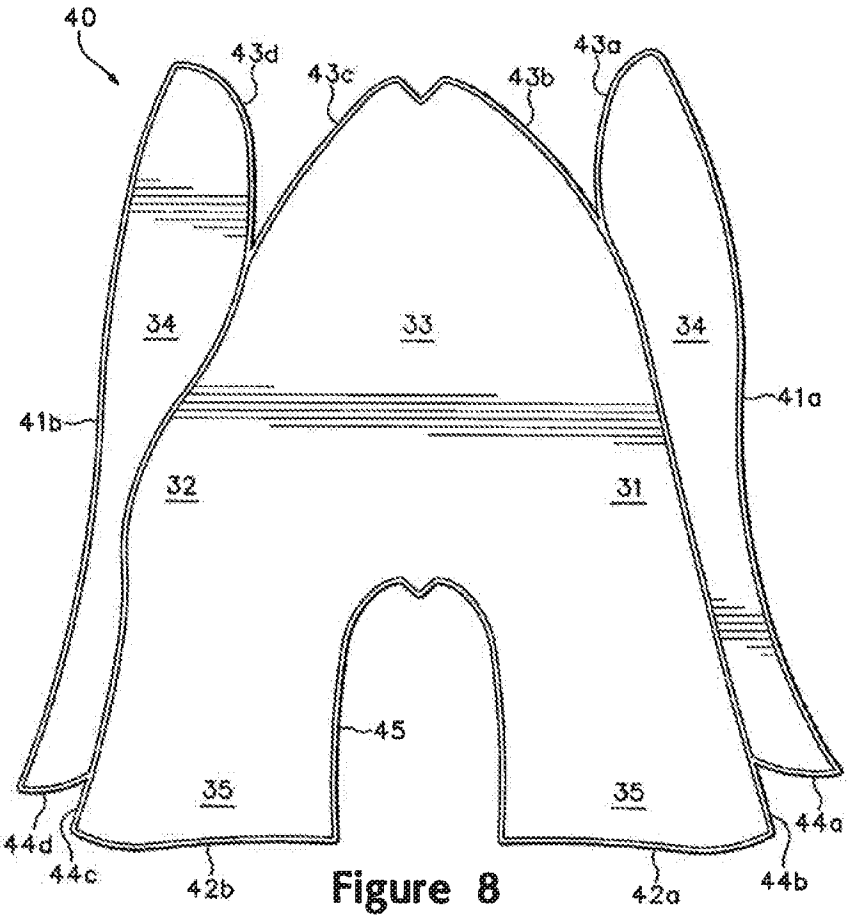


Figure 8

Upper 30 is depicted in FIGS. 2-7 as having a lateral region 31, an opposite medial region 32, an instep region 33, a lower region 34, and a heel region 35. Lateral region 31 extends through a longitudinal length of footwear 10 and is generally configured to contact and cover a lateral side of the foot. Medial region 32 has a similar configuration that generally corresponds with a medial side of the foot. Instep region 33 is positioned between lateral region 31 and medial region 32, and instep region 33 extends over an instep area of the foot. Lower region 34 forms a bottom surface of upper 30 and also extends through the longitudinal length of footwear 10. Heel region 35 forms a rear portion of upper 30 and is generally configured to contact and cover a heel area of the foot. In addition, lateral region 31, medial region 32, instep region 33, and heel region 35 cooperatively define an ankle opening 36 for providing the foot with access to the void within upper 30.

Petitioner adidas AG - Exhibit 1001 - Page 10

Skechers EX1013-p. 445
Skechers v Nike

26. The '011 Patent explains how the various edges of the textile element are joined together, forming several seams along the heel, toe, and longitudinal length of the bottom of upper, to make the shape of the upper, and the upper is then secured to the sole. (5:41-6:40)

27. The '011 Patent emphasizes that the textile element is a single material element with unitary construction (6:41-50):

> Textile element 40 is a single material element with a unitary construction, as discussed above. As defined for purposes of the present invention, unitary construction is intended to express a configuration wherein portions of a textile element are not joined together by seams or other connections, as depicted with textile element 40 in FIG. 8. Although the various edges 41a-44d are joined together to form seams 51-54, the various portions of textile element 40 are formed as an unitary element without seams, as discussed below.

28. The '011 Patent describes that the textile element may be formed any number of ways with one or more yarns that are mechanically manipulated using a variety of existing processes (6:51-65):

> Textile element 40 is primarily formed from one or more yarns that are mechanically-manipulated through either an interweaving, intertwining and twisting, or interlooping process, for example. As discussed in the Background of the Invention section above, interweaving is the intersection of two yarns that cross and interweave at right angles to each other. The yarns utilized in interweaving are conventionally referred to as warp and weft. Intertwining and twisting encompasses procedures such as braiding and knotting where yarns intertwine with each other to form a textile. Interlooping involves the formation of a plurality of columns of intermeshed loops, with knitting being the most common method of interlooping. Textile

Petitioner adidas AG - Exhibit 1001 - Page 11

Skechers EX1013-p. 446
Skechers v Nike

element 40 may, therefore, be formed from one of these processes for manufacturing a textile.

The '011 Patent continues by identifying several types of knitting and knitting machines that may be used, including a machine from Santoni S.p.A. in Italy that the patent identifies by model number. (6:66-7:27)

29. Fig. 10 from the '011 Patent shows another embodiment of a textile element described therein, where the textile element has different configurations in different areas:

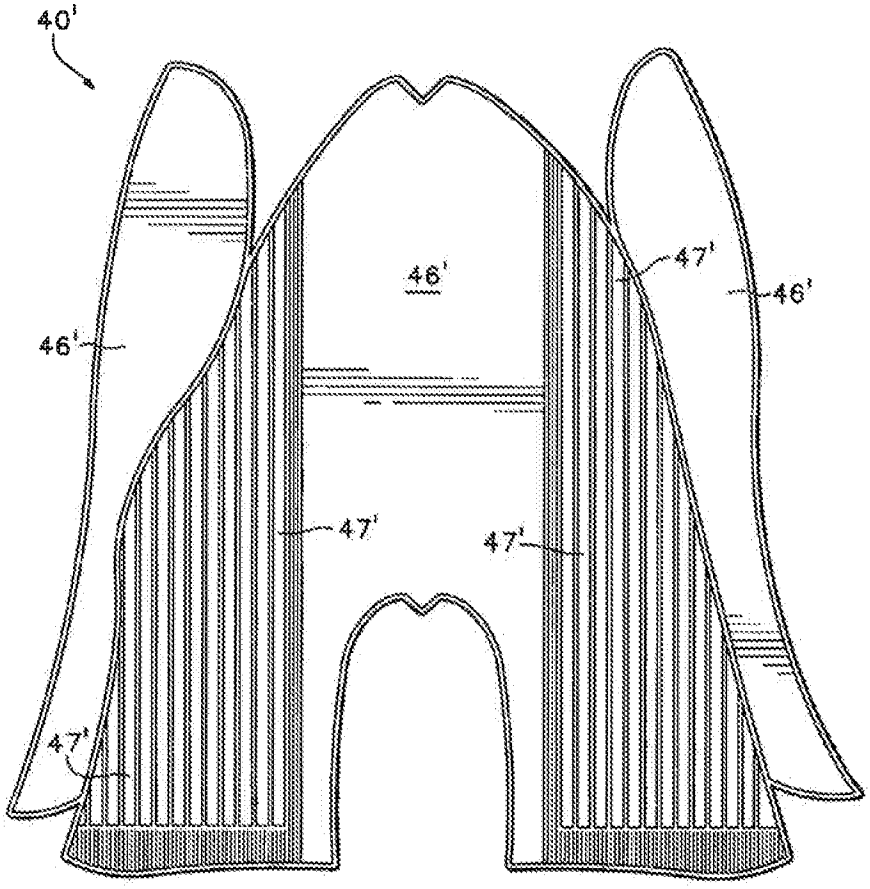


Figure 10

Petitioner adidas AG - Exhibit 1001 - Page 12

Skechers EX1013-p. 447
Skechers v Nike

30. The area that corresponds with the instep region has a first texture 46' that is generally smooth, while the areas that correspond with the lateral and medial regions have a second texture 47' that is a plurality of longitudinal ribs. (9:13-21) The patent states that the ribs may be present for aesthetic purposes or may affect the stretch properties of the upper. (9:21-23) The varying textures may be obtained by varying the stitch types in the different areas or by varying the type of yarn. (9:65-10:1) Changing the yarn type can also be used to impart different properties in different areas, beyond just texture differences. (10:1-14)

31. The '011 Patent explains how the inventors believed this was different from conventional articles of footwear (9:23-35):

> Accordingly, textile element 40' exhibits areas with different textures in a single element of textile material.
>
> Many conventional articles of footwear incorporate uppers with various material elements that each exhibit different properties. For example, a first material element may be smooth, and a second material element may be textured. The first and second material elements are then stitched together to form a portion of the conventional upper. Textile element 40' also exhibits smooth and textured areas. In contrast with the conventional upper, however, first texture 46' and second texture 47' are incorporated into a single, unitary element of textile, rather than two separate elements that are stitched or otherwise joined together.

32. The '011 Patent also discloses an embodiment that has areas with three different textures. (Fig. 11; 9:36-64).

Petitioner adidas AG - Exhibit 1001 - Page 13

Skechers EX1013-p. 448
Skechers v Nike

33. The '011 patent includes claims 1-46, of which claims 1, 16, 24, 36 and 44 are the independent claims. All of the independent claims require a sole secured to a knitted upper, with the upper having a plurality of knit constructions (claims 1, 24, 36) or two areas with different constructions or stitch configurations (claims 16, 44). All of the claims are reproduced below:

Nike '011 Patent Claims
1. An article of footwear comprising:
an upper incorporating a weft-knitted textile element having edges that are joined together to define at least a portion of a void for receiving a foot,
wherein the weft-knitted textile element incorporates a single type of textile having a plurality of knit constructions; and
a sole structure secured to the upper.
2. The article of footwear recited in claim 1, wherein the weft-knitted textile element forms at least a portion of a lateral side, a medial side, and an instep region of the upper.
3. The article of footwear recited in claim 1, wherein the edges include a pair of first edges that are joined to form a first seam extending longitudinally along a lower region of the upper.
4. The article of footwear recited in claim 3, wherein the edges include a pair of second edges that are joined to form a second seam extending along a heel region of the upper.
5. The article of footwear recited in claim 4, wherein the second seam extends vertically.
6. The article of footwear recited in claim 4, wherein the edges include at least a pair of third edges that are joined to form a third seam extending through a forefoot area of the upper.

Petitioner adidas AG - Exhibit 1001 - Page 14

Skechers EX1013-p. 449
Skechers v Nike

Nike '011 Patent Claims
7. The article of footwear recited in claim 1, wherein the weft-knitted textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.
8. The article of footwear recited in claim 1, wherein the upper includes an exterior layer, an intermediate layer, and an interior layer, and the weft-knitted textile element forms at least a portion of the interior layer.
9 The article of footwear recited in claim 1, wherein the weft-knitted textile element forms at least a portion of both an interior surface and an exterior surface of the upper.
10. The article of footwear recited in claim 9, wherein at least one additional element is secured to the exterior surface and forms a portion of the exterior surface.
11. The article of footwear recited in claim 10, wherein the additional element is secured to a forefoot area of the upper.
12. The article of footwear recited in claim 10, wherein the additional element is secured to a heel area of the upper.
13. The article of footwear recited in claim 1, wherein the textile element forms an interior surface of the upper.
14. The article of footwear recited in claim 1, wherein the weft-knitted textile element is created by circular knitting.
15. The article of footwear recited in claim 1, wherein the weft-knitted textile element is created by flat knitting.
16. An article of footwear comprising:
an upper incorporating a weft-knitted textile element, the textile element having a first area and a second area with a unitary construction,
the first area being formed of a first stitch configuration, and the second area being formed of a second stitch configuration that is different from the first stitch configuration to impart varying properties to the textile element; and

Petitioner adidas AG - Exhibit 1001 - Page 15

Skechers EX1013-p. 450
Skechers v Nike

Nike '011 Patent Claims
a sole structure secured to the upper.
17. The article of footwear recited in claim 16, wherein the first stitch configuration provides a substantially smooth texture to the first area, and the second stitch configuration provides a texture to the second area that is rougher than the smooth texture.
18. The article of footwear recited in claim 17, wherein the second stitch configuration forms a rib structure in the second area.
19. The article of footwear recited in claim 16, wherein at least one of the first stitch configuration and the second stitch configuration forms an aperture in the weft-knitted textile element.
20. The article of footwear recited in claim 16, wherein the weft-knitted textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.
21. The article of footwear recited in claim 16, wherein the upper includes an exterior layer, an intermediate layer, and an interior layer, and the weft-knitted textile element forms at least a portion of the interior layer.
22. The article of footwear recited in claim 16, wherein the textile layer forms at least a portion of both the interior surface and an exterior surface of the upper.
23. The article of footwear recited in claim 16, wherein the weft-knitted textile element forms an interior surface of the upper.
24. An article of footwear comprising:
an upper incorporating a textile element having edges that are joined together to form seams and define at least a portion of a void for receiving a foot,
the seams including a first seam and a second seam, the first seam extending from a heel area to a forefoot area of the footwear along a lower surface of the upper, and the second seam extending vertically in the heel area,
wherein the textile element incorporates a single type of textile having a plurality of knit constructions; and

Petitioner adidas AG - Exhibit 1001 - Page 16

Skechers EX1013-p. 451
Skechers v Nike

Nike '011 Patent Claims
a sole structure secured to the upper.
25. The article of footwear recited in claim 24, wherein the footwear includes a third seam extending through the forefoot area of the upper.
26. The article of footwear recited in claim 24, wherein at least one of the knit constructions forms an aperture in the textile element.
27. The article of footwear recited in claim 24, wherein the knit constructions produce varying properties in the textile element including a varying elasticity of the textile element.
28. The article of footwear recited in claim 24, wherein the knit constructions produce varying properties in the textile element including a varying air permeability of the textile element.
29. The article of footwear recited in claim 24, wherein the textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.
30. The article of footwear recited in claim 24, wherein the textile element forms at least a portion of both an interior surface and an exterior surface of the upper.
31. The article of footwear recited in claim 24, wherein the textile element forms an interior surface of the footwear, and at least one additional layer forms an exterior surface of the footwear.
32. The article of footwear recited in claim 24, wherein at least a portion of the textile element has a weft knitted construction.
33. The article of footwear recited in claim 32, wherein the weft knitted construction is produced by one of circular knitting and flat knitting.
34. The article of footwear recited in claim 24, wherein the textile element has a warp knitted construction.
35. The article of footwear recited in claim 34, wherein the warp knitted construction is produced by a jacquard double needle-bar raschel.
36. An article of footwear comprising:

Nike '011 Patent Claims
an upper incorporating a knitted textile element formed with a knitting machine, the textile element being removed from a textile structure that includes an outline of the textile element, and
the textile element having edges that are joined together to define at least a portion of a void for receiving a foot,
wherein the textile element incorporates a single type of textile having a plurality of knit constructions; and
a sole structure secured to the upper.
37. The article of footwear recited in claim 36, wherein the knitted textile element has a structure formed by a wide-tube circular knitting machine.
38. The article of footwear recited in claim 36, wherein the knitted textile element has a structure formed by a jacquard double needle-bar raschel knitting machine.
39. The article of footwear recited in claim 36, wherein the edges include a pair of first edges that are joined to form a first seam extending longitudinally along a lower region of the upper.
40. The article of footwear recited in claim 39, wherein the edges include a pair of second edges that are joined to form a second seam extending along a heel region of the upper.
41. The article of footwear recited in claim 40, wherein the edges include at least a pair of third edges that are joined to form a second seam extending through a forefoot area of the upper.
42. The article of footwear recited in claim 36, wherein the knitted textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.
43. The article of footwear recited in claim 36, wherein the knitted textile element forms an interior surface of the upper.
44. An article of footwear comprising:

Nike '011 Patent Claims
an upper incorporating a flat-knitted textile element, the flat-knitted textile element having a first area with a first unitary construction and a second area with a second unitary construction different from the first unitary construction,
the first area having a first set of properties, and the second area having a second set of properties that is different from the first set of properties to impart varying characteristics to the textile element; and
a sole structure secured to the upper.
45. The article of footwear recited in claim 44, wherein the first set of properties and the second set of properties are at least one of a stitch configuration and a yarn type.
46. The article of footwear recited in claim 44, wherein the textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.

34. Although the '011 Patent has 46 claims, many of the claims recite many of the same features repeatedly, just in slightly different combinations. In other words, the actual subject matter claimed across all 46 claims is not very extensive.

35. For example, all five independent claims have some common features – an upper incorporating a knitted textile element and a sole structure secured to the upper. (Claims 1, 16, 24, 36, 44) Claims 1 and 16 further state that the textile element is "weft-knitted," while claim 44 states it is "flat-knitted." Claims 16 and 44 require the textile element to have a unitary construction with two different areas that have varying characteristics or properties. In claim 16, the two areas

Petitioner adidas AG - Exhibit 1001 - Page 19

Skechers EX1013-p. 454
Skechers v Nike

have different stitch configurations to impart the varying properties, while claim 44 requires different constructions in the two areas to impart varying characteristics. Claims 1, 24, and 36 state that the textile element has "edges that are joined together to define at least a portion of a void for receiving a foot" and that "textile element incorporates a single type of textile having a plurality of knit constructions."[1] Claim 24 adds that two seams are formed (one from heel to forefoot, the second vertically in the heel), while claim 36 adds that the textile element is removed from a textile structure that has an outline of the textile element.

36. The dependent claims are likewise repetitive and add minor additional features to what is being claimed as the invention, for example:

- specific seams formed in the upper (claims 3-6, 25, 39-41)
- the textile element forms one of an interior, intermediate, or exterior layer (claims 7, 20, 29, 42, 46)

[1] By "single type of textile," I understand the claims to be saying the textile element is a single material element made with one or more yarns. The '011 Patent states that: (a) "textile element 40 is a single material element that is formed to exhibit a unitary (i.e., one piece) construction" (5:38-39); (b) "textile element 40 is primarily formed from one or more yarns that are mechanically-manipulated through either interweaving, intertwining and twisting, or interloping process for example (6:51-54); (c) "accordingly, textile element 40' exhibits areas with different textures in a single element of textile material" (9:23-24); (d) "in contrast with the conventional upper, however, first texture 46' and second texture 47' are incorporated into a single, unitary element of textile, rather than two separate elements that are stitched or otherwise joined together" (9:32-35).

Petitioner adidas AG - Exhibit 1001 - Page 20

Skechers EX1013-p. 455
Skechers v Nike

- the upper has interior, intermediate, or exterior layers and the textile element forms at least portion of interior layer (claims 8, 21)
- the textile element forms a portion of both interior and exterior surface of upper (claim 9, 22)
- an additional element secured to and forming portion of exterior surface (claims 10-12)
- the textile element forms interior surface of upper (claim 13, 23, 43)
- circular knitting or circular knitting machine is used (claims 14, 33, 37)
- flat knitting is used (claims 15, 33)
- varying stitch configurations, or smooth, rougher/ribbed stitching (claims 17, 18, 45)
- apertures in the textile element (claims 19, 26)
- warp knitting and specific type of machine (claims 24, 35, 38)

VI. Overview of the Prior Art and the Trivial Nature of the Features Claimed in the '011 Patent.

37. The claims of the '011 Patent recite features that were well known in the prior art in March 3, 2004, when the application for the '011 Patent was filed.

38. Knitted uppers of a unitary construction with modifications of stitches, yarn types, patterns, or constructions in different areas for creating various functional regions have been known for decades. For example, such constructions have been described in detail in several U.S. patents, including U.S. Patent No.

5,345,638 to Nishida ("Nishida"), U.S. Patent No. 2,147,197 to Glidden ("Glidden"), and U.S. Patent No. 2,314,098 to McDonald ("McDonald"). Japanese Patent Publication No. H6-113905 to Osamu Daimaru ("Osamu") describes a similar unitary upper made with a woven fabric, instead of a knit.

39. I have reviewed other prior art, some of which is relevant to some of the dependent claims, including U.S. Patent No. 2,641,004 to Whiting ("Whiting"), U.S. Patent No. 4,785,558 to Shiomura ("Shiomura"); and PCT International Publication No. WO 90/03744 to Curley ("Curley"). These prior art references describe additional features of shoe uppers made with knitted fabrics. I also consulted the reference text "Knitting Technology: A comprehensive handbook and practical guide," 3rd edition, by David J. Spencer, published in 2001 ("Spencer"). All of these references are prior art under 35 U.S.C. § 102(b) (mentioned in above in Section IV), as they were all published more than one year before Nike filed the application for the '011 Patent on March 3, 2004.

40. A central teaching of the '011 Patent is that knitting complete uppers is more efficient than joining together separately made pieces of various materials. This is common sense, and it was also taught by Nishida, Glidden, and McDonald well before the '011 Patent application was filed.

41. For example, Nishida states "For production of a shoe upper by cutting out the shoe upper in the form of a layout from a web of material, shaping

Petitioner adidas AG - Exhibit 1001 - Page 22

Skechers EX1013-p. 457
Skechers v Nike

of the shoe upper with connection of material parts of the layout with formation of seams, a process is used by which such shoe uppers can be produced in a time saving and efficient manner despite the many individual parts present or to be made visible." (Nishida, Abstract) Glidden discloses that "The principal objects of the present invention are to provide comfort, stretchability, light weight, breathability, and absorption in an article of footwear and to provide for economy of materials and convenience of procedure in the manufacture of same." (Glidden, p.1, 1:25-30) Finally, McDonald explains that "By my improvements, a comfortable and relatively durable and attractive shoe may be produced at a minimum cost by unskilled workers and without any need for the expensive shoe-making machinery ordinarily deemed necessary for economical shoe manufacturing." (McDonald, p. 2, 2:18-23)

42. Indeed, the idea of a unitary construction itself is an ancient idea, harkening back to moccasin construction techniques. Moccasins are made from an upper cut from a single piece of leather and stitched together by joining a limited number of pre-cut edges to form a shoe. This is a most efficient method of shoemaking that is still practiced today, but it has limitations.

43. Because only a single material is used for the upper, it can be challenging to take advantage of what we know and have known for some time about regional functional requirements. Shoe designers and engineers have long

Petitioner adidas AG - Exhibit 1001 - Page 23

Skechers EX1013-p. 458
Skechers v Nike

considered uppers as having regionally distinct functional zones. For example, certain areas would be intentionally designed to have more or less stretch, more or less breathability, more or less durability, or, more or less friction. Such regions are designed with different physical properties and for the last 30+ years it has been quite common to use different materials in certain areas to provide the desired properties.

44. However, there is no requirement to use different materials, and it has been known that a single material could be used. With companies more concerned in the last decade with the environment and reducing waste, it is only logical that companies may look to return to uppers made with a single material or a greatly reduced number of materials.

45. From the 1980s until the present, it has been a requirement of running shoes and other sports shoes that these regional upper requirements be addressed. Therefore, it is not novel that knit uppers would be made with specific textile elements that address these requirements. Some of these regional requirements go back even further.

46. For example, shoe designers and engineers have specifically addressed the requirement for breathability since the first Converse Chuck Taylor basketball shoes were made almost 100 years ago with two extra holes in the upper for enhancing breathability. The notion that shoe uppers should be breathable is

Petitioner adidas AG - Exhibit 1001 - Page 24

Skechers EX1013-p. 459
Skechers v Nike

quite an old idea and shoes with apertures for enhancing breathability and with special mesh panels incorporated into the upper to increase air exchange have been part of the shoe design for decades. Similarly, wear patches, such as the ankle patches in the early Converse Chuck Taylors have also been used to enhance durability or protection in distinct areas of that upper.

47. Everyone who has worked in the athletic shoe industry for at least a few years over the last 30 years knows about the regional functional requirements of uppers.

48. Further to this point, these specially constructed regions for durability, support, or breathability are described in Nishida and Glidden. For example, Nishida (3:43-48) discloses "Since, generally, toe area 14 is designed to be relatively deformably soft or elastic, and optionally, also permeable to air, the web of material 1, in toe area 14, according to the present invention, is correspondingly designed by suitable selection of the weave pattern, knit pattern and/or material used …." Glidden, in another example, states that "In fabricating the unitary upper, as by knitting, areas thereof which are normally subjected to greater wear and in which a lower degree of elasticity is desired, such as the toe 11 and the heel portion 12, may be more densely fabricated to provide therein heavier weight and less extensibility than in the other parts of the upper, as by changing the type of stitch or amount or thickness of the yarn in the knitting." (Glidden, p.1, 2:33-41)

Petitioner adidas AG - Exhibit 1001 - Page 25

Skechers EX1013-p. 460
Skechers v Nike

49. One-piece knitted uppers having areas made differently to address the different functional regions of the upper were well known before March 2004.

50. As noted above, the '011 Patent describes that the one-piece textile element can be made using any number of processes for mechanically manipulating yarns, including weaving and knitting. The claims though often require some specific type of knitting (e.g., "weft" for claims 1 and 16, "flat" for claim 44; many of the dependent claims also require circular, warp, or specific knitting machines). In fact, many of the dependent claims are nothing more than a recitation of one machine or one technique from a laundry list of knitting machines and techniques and appear intended to encompass the widest possible set of options for choosing a knitted material or materials for construction of the upper.

51. These are common design choices that are made everyday by shoemakers. It would have been obvious in March 2004 to the skilled person to select a particular type of knitted upper material from among the long list of options and machines that were known in the art.

52. There is nothing of special significance about weft-knitting from a functional or design point of view. In fact, materials with overlapping functional requirements can be made by either weft or warp knitting. A skilled person would understand that any selection of circular, flat, or warp, or any particular machine that knits textiles in any of these manners, is nothing more than a simple design

Petitioner adidas AG - Exhibit 1001 - Page 26

Skechers EX1013-p. 461
Skechers v Nike

choice from among a number of known, available choices that have been available to the shoe designer and engineer for many years.

53. Indeed the '011 Patent spells this out clearly at the bottom of column 6 and continued in column 7. It describes the use of various processes for forming the necessary textile element of the invention, including interweaving, intertwining or twisting, or interloping processes. ('011 Patent, 6:51-53) In column 7, the '011 Patent goes on to describe the use of warp knitting including the sub-types tricot, racschel, double needle-bar raschel and jacquard double needle-bar raschel, as well as weft knitting and its sub-types described including circular and flat knitting. ('011 Patent, 7:1-10) Significantly, the '011 Patent states that the textile element may be formed through any of the mechanical processes discussed in the specification. ('011 Patent, 6:63-65; 7:11-12)

54. Weft knit describes a type of knitted fabric in which yarns are formed into stitches in widthwise manner. Common examples of weft knits are circular knits and flat knits.

(Fabriclink.com; http://www.fabriclink.com/dictionaries/textile.cfm#W).

Examples of weft knit fabrics used in footwear are: spacer meshes; nylon, polyester, and, cotton meshes; weft-knit polyester suedes; terry; ribbed knits, and jersey. Some jacquard knit are also weft double-knit fabrics.

Petitioner adidas AG - Exhibit 1001 - Page 27

Skechers EX1013-p. 462
Skechers v Nike

55. Warp knitting is a type of knitted fabric construction in which the yarns are formed into stitches in a lengthwise manner, i.e., along the length of the fabric. Warp knits are generally less elastic than weft knits. Common examples of warp knits used in footwear uppers are tricot knits and raschel knits.

56. The Spencer reference text mentioned above explains knitting processes and machines in great detail. An excerpt from the reference textbook entitled "Clothing Technology," Third English edition, by Hannelore Eberle (and others) published in 2002 (Beuth-Verlag GmbH) provides a definition and summary graphic showing that knitted fabrics are generally classified as weft or warp, and that weft knits may be made with flat or circular machines. These things were well known to the skilled person decades before March 2004. I understand the "Clothing Technology" excerpt will be included with the petition for *inter partes* review filed with the U.S. Patent Office, but I have also reproduced it below for reference:

Petitioner adidas AG - Exhibit 1001 - Page 28

Skechers EX1013-p. 463
Skechers v Nike

3 Textile Fabrics
3.3 Knitted Fabrics


3.3.1 Classification of Knitted Fabrics

Definition after ISO 1806: 1984

Knitted fabrics are made from interlocking loops, formed from a single yarn or from many.
They are classified into weft knitted and warp knitted fabrics.

KNITTED FABRICS


WEFT KNITTED



Characteristics

- May be made from a single yarn.
- The yarn is fed crosswise to the length of the fabric.
- Can be unravelled, may ladder.
- Knitting needles can work sequentially or all together.

WARP KNITTED




Characteristics

- Requires a full warp sheet.
- The loop-forming yarns are fed in the direction of the length of the fabric.
- Can not be unravelled, usually does not ladder.
- Knitting needles always work together as a unit.

Production


WEFT KNITTED FABRICS

Sequential needles:
Loops are formed in sequence across the width of the fabric. Machines can be flat or circular. Needles are usually of the latch type.



1: Sequential loop formation on a flat machine


Simultaneous needles:
All of the needles are moved together or the needles are stationary and the fabric is moved. Machines can be flat or circular. Needles are usually of the bearded type.



2: Simultaneous loop formation

WARP KNITTED FABRICS

Warp knitting:
Warp knitting uses one or more warp sheets. Each yarn is looped around a needle and the needles are all moved together. The needles may be of the bearded, latch, or compound type. Warp knitting machines with latch or compound needles are called raschel machines and the material they make is called raschel fabric.



3: Loop formation on a warp knitting machine

83

57. Although it is possible to make some generalizations about weft versus warp knits, they are just that – generalizations. They do not represent the elucidation of exclusive properties. The more relevant point is that the functional properties of all possible warp-knit and weft-knit fabrics overlap. In other words, it is possible to produce fabrics with a wide range of functional properties such as stretch, breathability, durability, and so on using either technique.

58. The prior art I reviewed shows that both warp knitting and weft knitting, including the various sub-types identified in the '011 Patent, are well known:

- McDonald (p. 1, 2:26-39): "In the embodiment of my invention illustrated in Figs. 1 and 2, a seamless sock is knit on a conventional type of circular knitting machine with a top welt of ribbed fabric having stretchable elastic threads 2 knit circumferentially therein in any usual manner to form a stretchable elastic welt, as for instance in the manner illustrated in Letters Patent Nos. 630,110, 1,883,303, 1,929,006, or any of the other known methods of incorporating in a weft knit fabric stretchable elastic threads composed of wrapped cores of extruded or cut rubber or rubber substitutes of which the stretchable elastic yarns used in my invention are composed."

- Whiting (2:53-56): "It will be realized that the sock may be otherwise produced, whether initially seamless or not, as by knitting the same on flat or circular knitting machines…."

- Curley (pp. 7-8): "In one preferred embodiment, the outer layer is a warp knit fabric classified as 'tricot'….In particular, two bar knits such as full tricot and warp lockknit have shown particularly good characteristics with regard to the molding process as well as end use. In another preferred embodiment, the outer layer is a weft knit fabric of jersey, rib, or purl designation"

Petitioner adidas AG - Exhibit 1001 - Page 30

Skechers EX1013-p. 465
Skechers v Nike

- Shiomura (3:4-15): "The above-mentioned shoe upper can be easily knitted using a knitting machine such as a tricot knitting machine or a Raschel knitting machine.... Alternatively, the knitting may be conducted using a double Raschel knitting machine which can knit the shoe upper simply in one step because it can simultaneously conduct the two above mentioned steps." Shiomura 3:4-15.

59. The same statement can be made when comparing knitted fabrics with woven fabrics. It used to be generalized that woven fabrics could be considered less elastic and less breathable than knitted fabrics, but the ability to interweave elastic threads like Spandex and Lycra, and loose weaving techniques with specially treated fibers have changed all that. It is possible to find woven and knit fabrics with identical elasticity and breathability. In fact, shoe designers and engineers are not really required to choose knits if elasticity and breathability are the primary features they are looking for. Instead, they have a wide range of fabrics with different properties from both the knitted and woven families of fabrics.

60. This was well known in the prior art. Curley, for example, states (p. 8):

> In still another embodiment, the outer layer is of the woven classification. In utilizing woven structure fabrics in the fabrication process, success is more dependent on yarn schemes than in knit fabrics. While a characteristic of knitted structures is fabric stretch or elasticity, wovens possess lower stretch values due to the somewhat linear relationship between fabric and yarn width/length. Therefore, in utilizing woven materials in the process, it is necessary to focus on

Petitioner adidas AG - Exhibit 1001 - Page 31

Skechers EX1013-p. 466
Skechers v Nike

> yarn elasticity properties. Methods of incorporating elasticity in yarns is well known and may include texturing or using bi-component or bi-constituent yarn or fiber."

61. Nishida, which discloses almost every one of the claimed features in the '011 Patent and is from the early 1990s, explains that "In the production of the web of material, the layouts or the areas in which the layouts are provided are produced in a woven and/or knitted type different from the sole parts or those areas in which these patterns are provided." (Nishida, 1:60-64) Furthermore, Osamu (also from the early 1990s) describes "using both woven fabric and/or knitted fabric as uppers materials for shoes" when describing the related art. (Osamu, paragraph [0002])

62. This broadening of design choice also extends to the essence of the '011 Patent. The core teaching of the '011 Patent is that knitting complete uppers is more efficient than joining together separately made pieces of various materials. But the sophistication of modern computer-controlled Jacquard head looms means that it is also possible to using weaving techniques to produce unitary uppers with a high degree of regionalization of function. Osamu goes into detail on how these weaving techniques can be used to create unitary upper constructions with distinct functional regions.

63. Finally, several of the '011 Patent claims focus on seam location in the upper (e.g., claims 3-6, 24, 25, 39-41). The placement of seams in various

Petitioner adidas AG - Exhibit 1001 - Page 32

Skechers EX1013-p. 467
Skechers v Nike

locations is one of the choices made by pattern makers in the shoe industry. Basically, all the seam configurations claimed are simply a few of a limited number of configurations that patternmakers employ to impart various shapes to footwear and to ensure proper fit.

64. Further to this point, the creation of a textile upper for footwear that has edges that are joined together to form seams along the bottom and heel of the upper, as well as in the forefoot area, is a process that has been used to make shoes and slippers for more than 100 years. There is nothing new about the various seam locations described in the '011 Patent.

65. As the prior art Nishida patent clearly shows in Figures 1, 2, 4 and 5, creating a flat layout for a shoe that can be cutout and then folded and stitched to form a three-dimensional shoe upper was well known. In fact, the layout shown in Figure 4 of Nishida is very similar to those shown in the '011 Patent. By constructing the upper from the layout shown in Figure 4 of Nishida, the upper would necessarily have seams in the same places as the upper described and claimed in the '011 patent. Similarly, Osamu shows a very similar layout in its figures which would also create seams in the finished upper.

Petitioner adidas AG - Exhibit 1001 - Page 33

Skechers EX1013-p. 468
Skechers v Nike

VII. Claims 1-46 of the '011 Patent Are Anticipated and/or Obvious in View of U.S. Patent No. 5,345,638 to Nishida

66. As further explained in the claim chart below, it is my opinion that claims 1-46 of the '011 patent are invalid in view of the Nishida patent alone or Nishida combined with other prior art.

67. Nishida was issued by the Patent Office on September 13, 1994 and is entitled "Process for Producing a Shoe-Shaped Part from a Web of Material and Resulting Shoe-Shaped Part." The Abstract of Nishida states:

> For the production of a shoe upper by cutting out of the shoe upper in the form of a layout from a web of material, shaping of the shoe upper with connection of material parts of the layout with formation of seams, a process is used by which such shoe uppers can be produced in a timesaving and efficient manner despite the many individual parts present or to be made visible. For this purpose, a web of material (1) is used to produce layouts (2) by different production measures, such as different styles, yarn material, color, material thickness, single layer or multilayer type of material or the like, at the same time with the production of web of material (1), and with a sole part attached to the layout. The layout is cut from the web as a unit with the sole part and processed into a shoe part having an upper and sole part.

68. Nishida explains at 3:6-26:

> In FIGS. 1 and 2, a web of material is identified by 1, and is produced by a conventional textile process, tier example, by weaving and/or knitting and/or embroidering. The web of material 1 can be provided with a single or with a plurality of layouts 2 of the shape of a shoe upper 3, as it is represented from the side, for example, in FIG. 3.
>
> The web of material has a backing 4 that can be a conventionally used material formed, for example, of a warp and filling or a knitted fabric. Layout 2 is divided into different individual parts or areas, which differ from one another, such as by being of another material style

Petitioner adidas AG - Exhibit 1001 - Page 34

Skechers EX1013-p. 469
Skechers v Nike

> and/or by being of different fibers or yarns, for example, from wool, wool with metal yarns, silk, silk with metal yarns, wool with plastic fibers or the like and/or by being formed of different colors, such as from fibers or yarns of different colors, including those of metals, or by different color prints, and/or by being differently designed fiber extrudates or fiber extrudate compositions, such as twisted, processed parallel or the like.

69. Nishida also describes the advantages of multiple configurations or designs and the advantages of his invention, including low weight and reduced costs (4:12-18 and 4:52-60):

> As can be seen, any number of layouts 2 in the most varied configurations and/or designs as well as of different sizes can be produced on a single web of material 1. For this purpose, above all, the use of program-controlled, particularly computer-controlled, production devices is advantageous, so that style, color, design, size or the like can be varied at will.
>
> * * *
>
> As already indicated, any sizes and different upper designs can be produced by computer-controlled programs, starting from corresponding basic patterns. The completed shoe uppers produced from such webs of material are marked by an extremely low weight, for example, between 70 to 80 g in a shoe size of 8. The costs for the production of such uppers are exceptionally low in comparison with previously known processes.

70. In the chart below, all citations are to Nishida, except where I specifically identify that I am citing to another prior art reference. I have included direct quotations from Nishida in some instances.

71. In my opinion, Nishida describes every feature of claims 1-16, 19-34, 36, and 39-46 and therefore anticipates those claims. Even if all of these claims

Petitioner adidas AG - Exhibit 1001 - Page 35

Skechers EX1013-p. 470
Skechers v Nike

were not anticipated, they and claims 35, 37, and 38 are obvious based on Nishida alone and the knowledge of the skilled person in the art.

72. I have also cited to other prior art references – McDonald, Glidden Curley, Whiting, and Shiomura – and set forth alternative obviousness grounds for all of claims 1-46 in the chart below.

Nike '011 Patent Claims	Nishida
1. An article of footwear comprising:	Abstract; Fig. 3
an upper incorporating a weft-knitted textile element having edges that are joined together to define at least a portion of a void for receiving a foot,	Abstract; Figs. 2-3 3:6-12: "In FIGS. 1 and 2, a web of material is identified by 1, and is produced by a conventional textile process, tier example, by weaving and/or knitting and/or embroidering. The web of material 1 can be provided with a single or with a plurality of layouts 2 of the shape of a shoe upper 3, as it is represented from the side, for example, in FIG. 3." 3:31-42: "After cutting out layout 2 from the web of material 1, the edges 7 and 8 are stitched together and a heel seam thus is formed. Then, heel counter 9, represented in FIG. 3, is applied, for example, glued and/or stitched, to adjacent areas 5 and 6. Correspondingly, the contours of edges 11 and 12 are stitched together in the form of shoe toe 10, and a seam is formed on the shoe toe. To reduce wear, a toe cap 15, represented in FIG. 3, can be applied, especially glued and/or stitched, on the front area, adjacent to

Petitioner adidas AG - Exhibit 1001 - Page 36

Skechers EX1013-p. 471
Skechers v Nike

Nike '011 Patent Claims	Nishida
	front edge 13 of toe area 14." Nishida discloses producing the material that forms the upper with a "conventional textile process … by weaving and/or knitting …" At the time Nishida was filed in the U.S. (June 17, 1992) the skilled person would have known and understood that "conventional" knitting processes include both warp knitting and weft knitting (and further including both circular and flat knitting), since these knitting processes existed for many decades before 1992 and had been used in the making of shoe uppers for many decades as well. For example, McDonald dates to 1943 and describes a method of making shoes including use of a "conventional type of circular knitting machine" to form a "weft knit fabric" used to make the upper of a shoe. (McDonald, p. 1 at 2:26-39) As another example, Whiting dates to 1953 and describes a method for producing knitted shoe uppers of shrinkable yarn, including knitting the sock-like structure that forms the upper on "flat or circular knitting machines." (Whiting, 2:39-56) As another example, Curley, published in April 1990, describes shoes made with knitted layers in the upper, including both warp and weft knitting. (Curley, p. 7, line 32 – p. 8, line 25) It is my opinion that Nishida discloses both weft (including circular and flat) and warp knitting by disclosing that "conventional" knitting processes can be used for his invention. Even if Nishida was determined not to describe weft-knitting, it would have been obvious to the skilled person to use weft knitting from Nishida's disclosure of using a knitted material for the upper. Weft knitting

Nike '011 Patent Claims	Nishida
	was a well known knitting process in March 2004, when the '011 patent was filed. Weft knitting had been used for years in shoe uppers, as shown by McDonald, Whiting, and Curley, for many years. It would simply have been a matter of design choice from among a finite number of types of knitting processes one could use.
wherein the weft-knitted textile element incorporates a single type of textile having a plurality of knit constructions; and	3:15-4:18; 4:47-60; 5:41-45; 5:63-6:2; 6:4-41 3:15-26: "Layout 2 is divided into different individual parts or areas, which differ from one another, such as by being of another material style and/or by being of different fibers or yarns, for example, from wool, wool with metal yarns, silk, silk with metal yarns, wool with plastic fibers or the like and/or by being formed of different colors, such as from fibers or yarns of different colors, including those of metals, or by different color prints, and/or by being differently designed fiber extrudates or fiber extrudate compositions, such as twisted, processed parallel or the like." 4:12-18: "As can be seen, any number of layouts 2 in the most varied configurations and/or designs as well as of different sizes can be produced on a single web of material 1. For this purpose, above all, the use of program-controlled, particularly computer-controlled, production devices is advantageous, so that style, color, design, size or the like can be varied at will." 5:41-45: "Preferably, each layout 2 has at least five, preferably more than ten, patterns and a tongue 40 has at least

Nike '011 Patent Claims	Nishida
	two, preferably at least three patterns produced or appearing, which are different from one another in each case."
a sole structure secured to the upper.	Abstract; Fig. 3 4:39-46: "Finally, before or after cutting out of layout(s) 2, a tongue 32 (FIG. 3) is applied in the forefoot area. After the production of shoe upper 3, an insole and/or a midsole, optionally, is additionally applied or molded on. Completed shoe upper 3 is then brought into a gluing, injection or casting mold, in which a midsole 33 and an outsole 34 are molded by known measures, as is represented in FIG. 3."
2. The article of footwear recited in claim 1, wherein the weft-knitted textile element forms at least a portion of a lateral side, a medial side, and an instep region of the upper.	Figs. 1-5 3:15-4:46
3. The article of footwear recited in claim 1, wherein the edges include a pair of first edges that are joined to form a first seam extending longitudinally along a lower region of the	Fig. 4 5:3-13: "With the embodiment according to FIG. 4, a sole part section 29.1 that extends over the entire length of the sole is provided on outside contour 31 in the approximate form of a half of sole part 29, and a sole part section 29.2 which forms the remainder of sole part 29 is provided on the outside contour 30. Both sole part sections 29.1 and 29.2 complement each other to

Petitioner adidas AG - Exhibit 1001 - Page 39

Skechers EX1013-p. 474
Skechers v Nike

Nike '011 Patent Claims	Nishida
upper.	complete sole part 29. In this case, their outside contours 29.3 and 29.4 are connected with one another, for example stitched and/or glued and/or fused or the like, preferably by a longitudinal seam."
4. The article of footwear recited in claim 3, wherein the edges include a pair of second edges that are joined to form a second seam extending along a heel region of the upper.	Figs. 2, 4 3:31-36: "After cutting out layout 2 from the web of material 1, the edges 7 and 8 are stitched together and a heel seam thus is formed. Then, heel counter 9, represented in FIG. 3, is applied, for example, glued and/or stitched, to adjacent areas 5 and 6." 4:9-11: "A heel counter 28, represented in FIG. 3, is applied on areas 26, 27 after formation of the initially described heel seam."
5. The article of footwear recited in claim 4, wherein the second seam extends vertically.	Figs. 2-4 3:31-36: "After cutting out layout 2 from the web of material 1, the edges 7 and 8 are stitched together and a heel seam thus is formed. Then, heel counter 9, represented in FIG. 3, is applied, for example, glued and/or stitched, to adjacent areas 5 and 6." 4:9-11: "A heel counter 28, represented in FIG. 3, is applied on areas 26, 27 after formation of the initially described heel seam."
6. The article of footwear recited in claim 4, wherein the	Fig. 4 4:19-30:

Nike '011 Patent Claims	Nishida
edges include at least a pair of third edges that are joined to form a third seam extending through a forefoot area of the upper.	"According to an advantageous further development of the invention, an individual part 29 in the form of an insole can be co-produced on layout 2 of shoe upper 3. After being cut out, this individual part 29 remains connected with layout 2, and after or during the shaping and fixing of shoe upper 3 from layout 2, part 29 is folded into the plane of the shoe sole and is fastened to the lower edge zone of the shoe upper 3. This lower edge zone is defined in layout 2 by outside contours 30 and 31, and the manner of its fastening can be, in a way known in the art, for example, by gluing, stitching, tacking or the like."
7. The article of footwear recited in claim 1, wherein the weft-knitted textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.	Fig. 3 3:6-9; 3:66-4:1 3:66-4:1: "Optionally, in this case, the material can be woven or knitted in two or more layers or can be especially thick or additionally embroidered."
8. The article of footwear recited in claim 1, wherein the upper includes an exterior layer, an intermediate layer, and an interior layer, and the weft-knitted textile element forms at least a portion of the interior layer.	3:6-9; 3:62-4:1 3:66-4:1: "Optionally, in this case, the material can be woven or knitted in two or more layers or can be especially thick or additionally embroidered." The skilled person would understand that this passage teaches three layers, which means an interior, intermediate (middle), and exterior layer are all present. The skilled person would understand that by cutting out layout 2 and forming it as described in columns 3 and 4 of Nishida, the result is a textile element that forms a

Petitioner adidas AG - Exhibit 1001 - Page 41

Skechers EX1013-p. 476
Skechers v Nike

Nike '011 Patent Claims	Nishida
	portion an the interior layer. To the extent that one may suggest that backing 4 described in Nishida is not part of the "textile element" and forms the interior layer of the upper when layout 2 is cut out and shaped to as described in columns 3 and 4 to form the upper such that backing 4 forms an interior layer, Nishida describes that backing 4 is a "conventionally used material formed, for example, of a warp and filling or a knitted fabric." (3:13-15) Thus, a knitted portion still forms an interior layer of the upper. In addition, if it is determined that Nishida does not describe what is recited in claim 8, it would have been obvious to the skilled person to modify the textile element of Nishida to provide multiple layers with the knitted textile element forming a portion of the inner layer. Three-layer constructions with an inner layer of textile were well known in the prior art in March 2004, and it would have been a simple matter of design choice to make any necessary modifications to Nishida to obtain this construction. As the '011 patent describes in the section "Description of Background Art," three-layer upper constructions were well known in the prior art before March 3, 2004, as was using a textile material for the inner layer. The '011 patent explains as background art (1:44-2:6, underlining added): "Various materials may be utilized in manufacturing the upper. The upper of an article of athletic footwear, for example, may be formed from multiple material layers that include an exterior layer, an intermediate layer, and an interior layer. The materials forming the exterior layer of the upper may be selected based upon the properties of wear-resistance, flexibility, and air-permeability, for example. With regard to the exterior

Petitioner adidas AG - Exhibit 1001 - Page 42

Skechers EX1013-p. 477
Skechers v Nike

Nike '011 Patent Claims	Nishida
	layer, the toe area and the heel area may be formed of leather, synthetic leather, or a rubber material to impart a relatively high degree of wear-resistance. Leather, synthetic leather, and rubber materials may not exhibit the desired degree of flexibility and air-permeability. Accordingly, various other areas of the exterior layer of the upper may be formed from a synthetic or natural textile. The exterior layer of the upper may be formed, therefore, from numerous material elements that each impart different properties to specific portions of the upper. An intermediate layer of the upper may be formed from a lightweight polymer foam material that provides cushioning and protects the foot from objects that may contact the upper. Similarly, an interior layer of the upper may be formed of a moisture-wicking textile that removes perspiration from the area immediately surrounding the foot. In some articles of athletic footwear, the various layers may be joined with an adhesive, and stitching may be utilized to join elements within a single layer or to reinforce specific areas of the upper. Although the materials selected for the upper vary significantly, textile materials often form at least a portion of the exterior layer and interior layer." In other prior art references, Curley describes an upper that includes multiple layers preferably three layers (Curley, p. 6, lines 30-32), where a knit textile element forms a portion of an inner layer (Curley, p. 30, claim 34) and an outer layer (Curley, p. 7, line 32 – p. 8, line 5). In another example, Shiomura describes an upper that includes an outer knit fabric layer and an inner knit fabric layer, with a layer of crossing threads between.

Nike '011 Patent Claims	Nishida
	(Shiomura, 2:26-45)
9 The article of footwear recited in claim 1, wherein the weft-knitted textile element forms at least a portion of both an interior surface and an exterior surface of the upper.	Fig. 3; 3:6-4:46 3:66-4:1: "Optionally, in this case, the material can be woven or knitted in two or more layers or can be especially thick or additionally embroidered." The skilled person would understand that by cutting out layout 2 and forming it as described in columns 3 and 4 of Nishida, the result is an exterior surface as shown in Fig. 3 and a corresponding interior surface (i.e. portion facing the foot), both of which are formed by the textile element of Nishida. To the extent that backing 4 described in Nishida is not part of the "textile element" and forms the interior surface of the upper when layout 2 is cut out and shaped to as described in columns 3 and 4 to form the upper such that backing 4 forms an interior surface, Nishida describes that backing 4 is a "conventionally used material formed, for example, of a warp and filling or a knitted fabric." (3:13-15) Thus, a knitted portion still forms an interior surface of the upper. In addition, if it is determined that Nishida does not describe what is recited in claim 9, it would have been obvious to the skilled person to modify the textile element of Nishida to provide one or more layers with the knitted textile element forming a portion of the both the interior surface and the exterior surface of the upper. Upper constructions with an interior and exterior surfaces of knitted textile elements (whether a one layer structure or multiple layer structure) were well known in the prior art in March 2004, and it would have been a simple matter of design choice to make

Petitioner adidas AG - Exhibit 1001 - Page 44

Skechers EX1013-p. 479
Skechers v Nike

Nike '011 Patent Claims	Nishida
	any necessary modifications to Nishida. As the '011 patent describes in the section "Description of Background Art," upper constructions with exterior and interior surfaces made of textile elements were well known in the prior art before March 3, 2004. The '011 patent explains as background art (1:44-2:6, underlining added): "Various materials may be utilized in manufacturing the upper. The upper of an article of athletic footwear, for example, may be formed from multiple material layers that include an exterior layer, an intermediate layer, and an interior layer. The materials forming the exterior layer of the upper may be selected based upon the properties of wear-resistance, flexibility, and air-permeability, for example. With regard to the exterior layer, the toe area and the heel area may be formed of leather, synthetic leather, or a rubber material to impart a relatively high degree of wear-resistance. Leather, synthetic leather, and rubber materials may not exhibit the desired degree of flexibility and air-permeability. Accordingly, various other areas of the exterior layer of the upper may be formed from a synthetic or natural textile. The exterior layer of the upper may be formed, therefore, from numerous material elements that each impart different properties to specific portions of the upper. An intermediate layer of the upper may be formed from a lightweight polymer foam material that provides cushioning and protects the foot from objects that may contact the upper. Similarly, an interior layer of the upper may be formed of a moisture-wicking textile that removes perspiration from the area immediately surrounding the foot. In some articles of athletic footwear, the various layers may be joined with an adhesive, and stitching may be utilized to join elements

Nike '011 Patent Claims	Nishida
	within a single layer or to reinforce specific areas of the upper. Although the materials selected for the upper vary significantly, textile materials often form at least a portion of the exterior layer and interior layer." In other prior art references, Curley describes an upper that includes multiple layers preferably three layers (Curley, p. 6, lines 30-32), where a knit textile element forms a portion of an interior surface (Curley, p. 30, claim 34) and an exterior surface (Curley, p. 7, line 32 – p. 8, line 5). In another example, Shiomura describes an upper that includes an outer knit fabric layer (exterior surface) and an inner knit fabric layer (interior surface), with a layer of crossing threads between. (Shiomura, 2:26-45) In another example, Glidden describes a knitted upper where the knitted material forms a portion of both interior and exterior surfaces of the upper. (Glidden, Figs. 1-2, p. 1, 2:3-32)
10. The article of footwear recited in claim 9, wherein at least one additional element is secured to the exterior surface and forms a portion of the exterior surface.	Fig. 3; 2:37-47; 3:37-42; 3:53-58; 4:9-11 3:37-42: "Correspondingly, the contours of edges 11 and 12 are stitched together in the form of shoe toe 10, and a seam is formed on the shoe toe. To reduce wear, a toe cap 15, represented in FIG. 3, can be applied, especially glued and/or stitched, on the front area, adjacent to front edge 13 of toe area 14."
11. The article of footwear recited in claim 10, wherein the additional element is secured to a forefoot	3:37-42: "Correspondingly, the contours of edges 11 and 12 are stitched together in the form of shoe toe 10, and a seam is formed on the shoe toe. To reduce wear, a toe cap 15,

Petitioner adidas AG - Exhibit 1001 - Page 46

Skechers EX1013-p. 481
Skechers v Nike

Nike '011 Patent Claims	Nishida
area of the upper.	represented in FIG. 3, can be applied, especially glued and/or stitched, on the front area, adjacent to front edge 13 of toe area 14."
12. The article of footwear recited in claim 10, wherein the additional element is secured to a heel area of the upper.	4:9-11: "A heel counter 28, represented in FIG. 3, is applied on areas 26, 27 after formation of the initially described heel seam."
13. The article of footwear recited in claim 1, wherein the textile element forms an interior surface of the upper.	3:6-4:46 The skilled person would understand that by cutting out layout 2 and forming it as described in columns 3 and 4 of Nishida results in the textile element forming an interior surface (i.e. portion facing the foot) of the upper. To the extent that backing 4 described in Nishida is not part of the "textile element" and forms the interior surface of the upper when layout 2 is cut out and shaped to as described in columns 3 and 4 to form the upper such that backing 4 forms an interior surface, Nishida describes that backing 4 is a "conventionally used material formed, for example, of a warp and filling or a knitted fabric." (3:13-15) Thus, a knitted portion still forms an interior surface of the upper. In addition, if it is determined that Nishida does not describe what is recited in claim 13, it would have been obvious to the skilled person to modify the textile element of Nishida to provide one or more layers with the knitted textile element forming a portion of the interior surface of the upper. Upper constructions with an interior surface of a knitted textile element (whether a one layer structure or multiple layer structure) were well known in the prior art in March 2004, and it would have been a simple matter of design choice to make

Petitioner adidas AG - Exhibit 1001 - Page 47

Skechers EX1013-p. 482
Skechers v Nike

Nike '011 Patent Claims	Nishida
	any necessary modifications to Nishida. As the '011 patent describes in the section "Description of Background Art," upper constructions with interior surfaces made of textile elements were well known in the prior art before March 3, 2004. The '011 patent explains as background art (1:44-2:6, underlining added): "Various materials may be utilized in manufacturing the upper. The upper of an article of athletic footwear, for example, may be formed from multiple material layers that include an exterior layer, an intermediate layer, and an interior layer. The materials forming the exterior layer of the upper may be selected based upon the properties of wear-resistance, flexibility, and air-permeability, for example. With regard to the exterior layer, the toe area and the heel area may be formed of leather, synthetic leather, or a rubber material to impart a relatively high degree of wear-resistance. Leather, synthetic leather, and rubber materials may not exhibit the desired degree of flexibility and air-permeability. Accordingly, various other areas of the exterior layer of the upper may be formed from a synthetic or natural textile. The exterior layer of the upper may be formed, therefore, from numerous material elements that each impart different properties to specific portions of the upper. An intermediate layer of the upper may be formed from a lightweight polymer foam material that provides cushioning and protects the foot from objects that may contact the upper. Similarly, an interior layer of the upper may be formed of a moisture-wicking textile that removes perspiration from the area immediately surrounding the foot. In some articles of athletic footwear, the various layers may be joined with an adhesive, and stitching may be utilized to join elements

Petitioner adidas AG - Exhibit 1001 - Page 48

Skechers EX1013-p. 483
Skechers v Nike

Nike '011 Patent Claims	Nishida
	within a single layer or to reinforce specific areas of the upper. Although the materials selected for the upper vary significantly, textile materials often form at least a portion of the exterior layer and interior layer." In other prior art references, Curley describes an upper that includes multiple layers preferably three layers (Curley, p. 6, lines 30-32), where a knit textile element forms a portion of an interior surface (Curley, p. 30, claim 34). In another example, Shiomura describes an upper that includes an outer knit fabric layer (exterior surface) and an inner knit fabric layer (interior surface), with a layer of crossing threads between. (Shiomura, 2:26-45) In another example, Glidden describes a knitted upper where the knitted material forms a portion of the interior surface of the upper. (Glidden, Figs. 1-2, p. 1, 2:3-32)
14. The article of footwear recited in claim 1, wherein the weft-knitted textile element is created by circular knitting.	As discussed above for claim 1, Nishida describes the use of "conventional" knitting processes, as of June 1992, to form the textile element for the upper. Circular knitting was a conventional and well known process for knitting textiles for shoe uppers in 1992. Even if Nishida was determined not to describe circular knitting, it would have been obvious to the skilled person to use circular knitting from Nishida's disclosure of using a knitted material for the upper. Circular knitting was a well known knitting process in March 2004, when the '011 patent was filed. Circular knitting had been used for many years in shoe uppers, as shown, for example, by McDonald and Whiting. It would simply have been a matter of design choice from among a finite number of types of knitting processes

Petitioner adidas AG - Exhibit 1001 - Page 49

Skechers EX1013-p. 484
Skechers v Nike

Nike '011 Patent Claims	Nishida
	one could use to select circular knitting. For example, McDonald dates to 1943 and describes a method of making shoes including use of a "conventional type of circular knitting machine" to form a "weft knit fabric" used to make the upper of a shoe. (McDonald, p. 1 at 2:26-39) As another example, Whiting dates to 1953 and describes a method for producing knitted shoe uppers of shrinkable yarn, including knitting the sock-like structure that forms the upper on "flat or circular knitting machines." (Whiting, 2:39-56)
15. The article of footwear recited in claim 1, wherein the weft-knitted textile element is created by flat knitting.	As discussed above for claim 1, Nishida describes the use of "conventional" knitting processes, as of June 1992, to form the textile element for the upper. Flat knitting was a conventional and well known process for knitting textiles for shoe uppers in 1992. Even if Nishida was determined not to describe flat knitting, it would have been obvious to the skilled person to use flat knitting from Nishida's disclosure of using a knitted material for the upper. Flat knitting was a well known knitting process in March 2004, when the '011 patent was filed. Flat knitting had been used for many years in shoe uppers, as shown, for example, by Whiting. It would simply have been a matter of design choice from among a finite number of types of knitting processes one could use to select flat knitting. As another example, Whiting dates to 1953 and describes a method for producing knitted shoe uppers of shrinkable yarn, including knitting the sock-like structure that forms the upper on "flat or circular knitting machines." (Whiting, 2:39-56)
16. An article of	Fig. 3; Title

Nike '011 Patent Claims	Nishida
footwear comprising:	
an upper incorporating a weft-knitted textile element, the textile element having a first area and a second area with a unitary construction,	Abstract; Figs. 2-3 3:6-12: "In FIGS. 1 and 2, a web of material is identified by 1, and is produced by a conventional textile process, tier example, by weaving and/or knitting and/or embroidering. The web of material 1 can be provided with a single or with a plurality of layouts 2 of the shape of a shoe upper 3, as it is represented from the side, for example, in FIG. 3." 3:15-26: "Layout 2 is divided into different individual parts or areas, which differ from one another, such as by being of another material style and/or by being of different fibers or yarns, for example, from wool, wool with metal yarns, silk, silk with metal yarns, wool with plastic fibers or the like and/or by being formed of different colors, such as from fibers or yarns of different colors, including those of metals, or by different color prints, and/or by being differently designed fiber extrudates or fiber extrudate compositions, such as twisted, processed parallel or the like." 4:12-18: "As can be seen, any number of layouts 2 in the most varied configurations and/or designs as well as of different sizes can be produced on a single web of material 1. For this purpose, above all, the use of program-controlled, particularly computer-controlled, production devices is advantageous, so that style, color, design, size or the like can be varied at will." Nishida discloses producing the material that forms the

Petitioner adidas AG - Exhibit 1001 - Page 51

Skechers EX1013-p. 486
Skechers v Nike

Nike '011 Patent Claims	Nishida
	upper with a "conventional textile process … by weaving and/or knitting …" At the time Nishida was filed in the U.S. (June 17, 1992) the skilled person would have known and understood that "conventional" knitting processes include both warp knitting and weft knitting (and further including both circular and flat knitting), since these knitting processes existed for many decades before 1992 and had been used in the making of shoe uppers for many decades as well. For example, McDonald dates to 1943 and describes a method of making shoes including use of a "conventional type of circular knitting machine" to form a "weft knit fabric" used to make the upper of a shoe. (McDonald, p. 1 at 2:26-39) As another example, Whiting dates to 1953 and describes a method for producing knitted shoe uppers of shrinkable yarn, including knitting the sock-like structure that forms the upper on "flat or circular knitting machines." (Whiting, 2:39-56) As another example, Curley, published in April 1990, describes shoes made with knitted layers in the upper, including both warp and weft knitting. (Curley, p. 7, line 32 – p. 8, line 25) It is my opinion that Nishida discloses both weft (including circular and flat) and warp knitting by disclosing that "conventional" knitting processes can be used for his invention. Even if Nishida was determined not to describe weft-knitting, it would have been obvious to the skilled person to use weft knitting from Nishida's disclosure of using a knitted material for the upper. Weft knitting was a well known knitting process in March 2004, when the '011 patent was filed. Weft knitting had been used for years in shoe uppers, as shown by McDonald,

Petitioner adidas AG - Exhibit 1001 - Page 52

Skechers EX1013-p. 487
Skechers v Nike

Nike '011 Patent Claims	Nishida
	Whiting, and Curley, for many years. It would simply have been a matter of design choice from among a finite number of types of knitting processes one could use.
the first area being formed of a first stitch configuration, and the second area being formed of a second stitch configuration that is different from the first stitch configuration to impart varying properties to the textile element; and	3:15-4:18; 4:47-60; 5:41-45; 5:63-6:2; 6:4-41 3:15-26: "Layout 2 is divided into different individual parts or areas, which differ from one another, such as by being of another material style and/or by being of different fibers or yarns, for example, from wool, wool with metal yarns, silk, silk with metal yarns, wool with plastic fibers or the like and/or by being formed of different colors, such as from fibers or yarns of different colors, including those of metals, or by different color prints, and/or by being differently designed fiber extrudates or fiber extrudate compositions, such as twisted, processed parallel or the like." 3:43-52: "Since, generally, toe area 14 is designed to be relatively deformably soft or elastic, and optionally, also permeable to air, the web of material 1, in toe area 14, according to the present invention, is correspondingly designed by suitable selection of the weave pattern, knit pattern and/or the material used, such as, for example, Silk or plastic. The type of production can, additionally, insure that the toe area 14 has a good air exchange capability. For example, this can be achieved by a net-like woven or knitted structure." 4:12-18: "As can be seen, any number of layouts 2 in the most

Petitioner adidas AG - Exhibit 1001 - Page 53

Skechers EX1013-p. 488
Skechers v Nike

Nike '011 Patent Claims	Nishida
	varied configurations and/or designs as well as of different sizes can be produced on a single web of material 1. For this purpose, above all, the use of program-controlled, particularly computer-controlled, production devices is advantageous, so that style, color, design, size or the like can be varied at will." 5:41-45: "Preferably, each layout 2 has at least five, preferably more than ten, patterns and a tongue 40 has at least two, preferably at least three patterns produced or appearing, which are different from one another in each case." 5:63-6:2: "As already indicated, the webs of material being used can be produced by program-controlled web material production devices whose programs can be matched almost at will according to the corresponding basic setting with deviations in the size of the layouts of the individual shoe uppers or with changes of the type of weave or knit of individual areas or contours, the type of fiber or yarn and/or the color." The '011 Patent describes varying the "stitch type" as a way to vary the type of texture in different areas, and as separate from varying the type of yarn. ('011 Patent, 9:46-49, 9:65-10:3) Nishida specifically describes using different materials, different compositions (such as twisted or parallel processing or the like), and different knit types or knit patterns, therefore describing for the skilled person using different stitch configurations in different areas. Nishida describes this to give the textile element different properties in different areas. Even if Nishida did not describe using different stitch

Petitioner adidas AG - Exhibit 1001 - Page 54

Skechers EX1013-p. 489
Skechers v Nike

Nike '011 Patent Claims	Nishida
	configurations in different areas to vary the properties of the textile element in those areas, it was well known to skilled persons in the art to do so and it was taught in the prior art. It would have been obvious to vary stitch configurations as one of many ways to impart different properties to two different areas, and it would have been a simple matter of design choice to do so. For example, Glidden describes varying the properties in the toe and heel area of a knitted upper, such "as by changing the type of stitch or amount of thickness in the yarn in the knitting." (Glidden, p. 1, 2:33-44) In another example, McDonald describes knitting an ankle/heel portion, instep, and sole of a knitted upper with "a plain or jersey stitch" in contrast to another area of the upper made with a ribbed knit. (McDonald, p. 1, 2:26-49; Fig. 1)
a sole structure secured to the upper.	Abstract; Fig. 3 4:39-46: "Finally, before or after cutting out of layout(s) 2, a tongue 32 (FIG. 3) is applied in the forefoot area. After the production of shoe upper 3, an insole and/or a midsole, optionally, is additionally applied or molded on. Completed shoe upper 3 is then brought into a gluing, injection or casting mold, in which a midsole 33 and an outsole 34 are molded by known measures, as is represented in FIG. 3."
17. The article of footwear recited in claim 16, wherein the first stitch configuration provides a substantially	Glidden describes a first stitch configuration with a substantially smooth texture for the first area (Glidden, p. 1, 2:35-41, where the toe and heel portions may be more densely fabricated to provide heavier weight and less extensibility) and a second stitch configuration in a

Nike '011 Patent Claims	Nishida
smooth texture to the first area, and the second stitch configuration provides a texture to the second area that is rougher than the smooth texture.	second area that is rougher than the smooth texture (Glidden, p. 1, 2:41-44, where the ankle portion is made so as to provide softness and elasticity, such as a ribbed construction). In addition, McDonald describes a circular-knitted upper with a first stitch configuration for an ankle/heel, instep, and sole areas of the upper with a substantially smooth texture and a second stitch configuration for a different area that has a rougher, ribbed texture. (McDonald, p. 1, 2:26-49; Fig. 1) It would have been obvious to combine Nishida with Glidden or McDonald to vary the stitch configurations to provide one area with a substantially smooth texture and one are with a rougher or ribbed texture as a simple design choice, for aesthetics, because a ribbed texture may allow for more extensibility or stretchability, or because one may want a smoother interior layer adjacent the foot, for example.
18. The article of footwear recited in claim 17, wherein the second stitch configuration forms a rib structure in the second area.	As explained for claim 17, the second stitch configuration for the second area that forms the rougher texture is ribbed in both Glidden and McDonald, and it would have been obvious to modify Nishida for the same reasons as explained for claim 17.
19. The article of footwear recited in claim 16, wherein at least one of the first stitch configuration and the second stitch configuration forms an aperture in the weft-knitted textile element.	3:43-52; 6:25-31 3:43-52: "Since, generally, toe area 14 is designed to be relatively deformably soft or elastic, and optionally, also permeable to air, the web of material 1, in toe area 14, according to the present invention, is correspondingly designed by suitable selection of the weave pattern, knit pattern and/or the material used,

Nike '011 Patent Claims	Nishida
	such as, for example, Silk or plastic. The type of production can, additionally, insure that the toe area 14 has a good air exchange capability. For example, this can be achieved by a net-like woven or knitted structure." The '011 Patent describes that "apertures" are formed by omitting stitches to provide air permeability in the knitted textile element. ('011 Patent, 9:57-62) The "net-like" knitted structure described by Nishida has apertures for the same reason, air permeability.
20. The article of footwear recited in claim 16, wherein the weft-knitted textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.	Claim 20 adds the same limitation to independent claim 16 as claim 7 added to independent claim 1. Nishida describes the additional limitations of claim 20 – see discussion for claim 7 in chart.
21. The article of footwear recited in claim 16, wherein the upper includes an exterior layer, an intermediate layer, and an interior layer, and the weft-knitted textile element forms at least a portion of the interior layer.	Claim 21 adds the same limitation to independent claim 16 as claim 8 added to independent claim 1. Nishida describes the additional limitations of claim 21 or they are obvious in view of Curley or Shiomura – see discussion for claim 8 in chart.
22. The article of footwear recited in claim 16, wherein the textile layer forms at least a portion of both	Claim 22 adds the same limitation to independent claim 16 as claim 9 added to independent claim 1, except that claim 22 recites "the textile "layer" instead of "textile element." I have assumed this is a typographical error because claim 16 does not otherwise identify a "textile

Petitioner adidas AG - Exhibit 1001 - Page 57

Skechers EX1013-p. 492
Skechers v Nike

Nike '011 Patent Claims	Nishida
the interior surface and an exterior surface of the upper.	layer" and have treated this limitation as if it recited "textile element" as in claim 9. Nishida describes the additional limitations of claim 22 or they are obvious in view of Curley, Shiomura or Glidden – see discussion for claim 9 in chart.
23. The article of footwear recited in claim 16, wherein the weft-knitted textile element forms an interior surface of the upper.	Claim 23 adds the same limitation to independent claim 16 as claim 13 added to independent claim 1. Nishida describes the additional limitations of claim 23 or they are obvious in view of Curley, Shiomura, or Glidden – see discussion for claim 13 in chart.
24. An article of footwear comprising:	Abstract; Fig. 3
an upper incorporating a textile element having edges that are joined together to form seams and define at least a portion of a void for receiving a foot,	Abstract; Figs. 2-3 3:6-12: "In FIGS. 1 and 2, a web of material is identified by 1, and is produced by a conventional textile process, tier example, by weaving and/or knitting and/or embroidering. The web of material 1 can be provided with a single or with a plurality of layouts 2 of the shape of a shoe upper 3, as it is represented from the side, for example, in FIG. 3." 3:31-42: "After cutting out layout 2 from the web of material 1, the edges 7 and 8 are stitched together and a heel seam thus is formed. Then, heel counter 9, represented in FIG. 3, is applied, for example, glued and/or stitched, to adjacent areas 5 and 6. Correspondingly, the contours of edges 11 and 12 are stitched together in the form of shoe toe 10, and a seam

Petitioner adidas AG - Exhibit 1001 - Page 58

Skechers EX1013-p. 493
Skechers v Nike

Nike '011 Patent Claims	Nishida
	is formed on the shoe toe. To reduce wear, a toe cap 15, represented in FIG. 3, can be applied, especially glued and/or stitched, on the front area, adjacent to front edge 13 of toe area 14."
the seams including a first seam and a second seam, the first seam extending from a heel area to a forefoot area of the footwear along a lower surface of the upper, and the second seam extending vertically in the heel area,	Figs. 2, 4; 3:31-36; 4:9-11; 5:3-13 5:3-13: "With the embodiment according to FIG. 4, a sole part section 29.1 that extends over the entire length of the sole is provided on outside contour 31 in the approximate form of a half of sole part 29, and a sole part section 29.2 which forms the remainder of sole part 29 is provided on the outside contour 30. Both sole part sections 29.1 and 29.2 complement each other to complete sole part 29. In this case, their outside contours 29.3 and 29.4 are connected with one another, for example stitched and/or glued and/or fused or the like, preferably by a longitudinal seam." 3:31-36: "After cutting out layout 2 from the web of material 1, the edges 7 and 8 are stitched together and a heel seam thus is formed. Then, heel counter 9, represented in FIG. 3, is applied, for example, glued and/or stitched, to adjacent areas 5 and 6." 4:9-11: "A heel counter 28, represented in FIG. 3, is applied on areas 26, 27 after formation of the initially described heel seam."
wherein the textile element incorporates a single type of textile having a plurality of	3:15-4:18; 4:47-60; 5:41-45; 5:63-6:2; 6:4-41 3:15-26: "Layout 2 is divided into different individual parts or

Petitioner adidas AG - Exhibit 1001 - Page 59

Skechers EX1013-p. 494
Skechers v Nike

Nike '011 Patent Claims	Nishida
knit constructions; and	areas, which differ from one another, such as by being of another material style and/or by being of different fibers or yarns, for example, from wool, wool with metal yarns, silk, silk with metal yarns, wool with plastic fibers or the like and/or by being formed of different colors, such as from fibers or yarns of different colors, including those of metals, or by different color prints, and/or by being differently designed fiber extrudates or fiber extrudate compositions, such as twisted, processed parallel or the like." 4:12-18: "As can be seen, any number of layouts 2 in the most varied configurations and/or designs as well as of different sizes can be produced on a single web of material 1. For this purpose, above all, the use of program-controlled, particularly computer-controlled, production devices is advantageous, so that style, color, design, size or the like can be varied at will." 5:41-45: "Preferably, each layout 2 has at least five, preferably more than ten, patterns and a tongue 40 has at least two, preferably at least three patterns produced or appearing, which are different from one another in each case."
a sole structure secured to the upper.	Abstract; Fig. 3 4:39-46: "Finally, before or after cutting out of layout(s) 2, a tongue 32 (FIG. 3) is applied in the forefoot area. After the production of shoe upper 3, an insole and/or a midsole, optionally, is additionally applied or molded on.

Petitioner adidas AG - Exhibit 1001 - Page 60

Skechers EX1013-p. 495
Skechers v Nike

Nike '011 Patent Claims	Nishida
	Completed shoe upper 3 is then brought into a gluing, injection or casting mold, in which a midsole 33 and an outsole 34 are molded by known measures, as is represented in FIG. 3."
25. The article of footwear recited in claim 24, wherein the footwear includes a third seam extending through the forefoot area of the upper.	Fig. 4 4:19-30: "According to an advantageous further development of the invention, an individual part 29 in the form of an insole can be co-produced on layout 2 of shoe upper 3. After being cut out, this individual part 29 remains connected with layout 2, and after or during the shaping and fixing of shoe upper 3 from layout 2, part 29 is folded into the plane of the shoe sole and is fastened to the lower edge zone of the shoe upper 3. This lower edge zone is defined in layout 2 by outside contours 30 and 31, and the manner of its fastening can be, in a way known in the art, for example, by gluing, stitching, tacking or the like."
26. The article of footwear recited in claim 24, wherein at least one of the knit constructions forms an aperture in the textile element.	3:43-52: "Since, generally, toe area 14 is designed to be relatively deformably soft or elastic, and optionally, also permeable to air, the web of material 1, in toe area 14, according to the present invention, is correspondingly designed by suitable selection of the weave pattern, knit pattern and/or the material used, such as, for example, Silk or plastic. The type of production can, additionally, insure that the toe area 14 has a good air exchange capability. For example, this can be achieved by a net-like woven or knitted structure." The '011 Patent describes that "apertures" are formed by omitting stitches to provide air permeability in the knitted textile element. ('011 Patent, 9:57-62) The

Petitioner adidas AG - Exhibit 1001 - Page 61

Skechers EX1013-p. 496
Skechers v Nike

Nike '011 Patent Claims	Nishida
	"net-like" knitted structure described by Nishida has apertures for the same reason, air permeability.
27. The article of footwear recited in claim 24, wherein the knit constructions produce varying properties in the textile element including a varying elasticity of the textile element.	2:26-37: "It is of further advantage in the process according to the present invention that the individual patterns or partial patterns already can be produced directly in the production of the web of material in the desired shoe size, by which the cutting waste can be still further limited, since the individual patterns or partial patterns in the provided size can directly adjoin one another. Nevertheless, it is possible to configure the individual patterns or partial patterns soft, stiff, elastic, colored differently or the like, corresponding to the later stressing or desired shaping." 3:43-52: "Since, generally, toe area 14 is designed to be relatively deformably soft or elastic, and optionally, also permeable to air, the web of material 1, in toe area 14, according to the present invention, is correspondingly designed by suitable selection of the weave pattern, knit pattern and/or the material used, such as, for example, Silk or plastic. The type of production can, additionally, insure that the toe area 14 has a good air exchange capability. For example, this can be achieved by a net-like woven or knitted structure." 6:16-31: "wherein the layouts of the shoe upper and sole parts are produced by modifying the overall construction of the web of material in the locations of the layouts relative to that in portions thereof where the layouts of the shoe upper and the sole parts are not provided, using one of a different weaving and knitting type for

Petitioner adidas AG - Exhibit 1001 - Page 62

Skechers EX1013-p. 497
Skechers v Nike

Nike '011 Patent Claims	Nishida
	the layouts of the shoe upper than is used for producing the sole parts, said weaving and knitting types being matched to differing requirements for materials of the shoe upper and sole part of a shoe in relation to properties thereof including at least one of the properties of absorptivity, air permeability, softness, extensibility, wear resistance and appearance"
28. The article of footwear recited in claim 24, wherein the knit constructions produce varying properties in the textile element including a varying air permeability of the textile element.	3:43-52: "Since, generally, toe area 14 is designed to be relatively deformably soft or elastic, and optionally, also permeable to air, the web of material 1, in toe area 14, according to the present invention, is correspondingly designed by suitable selection of the weave pattern, knit pattern and/or the material used, such as, for example, Silk or plastic. The type of production can, additionally, insure that the toe area 14 has a good air exchange capability. For example, this can be achieved by a net-like woven or knitted structure." 6:16-31: "wherein the layouts of the shoe upper and sole parts are produced by modifying the overall construction of the web of material in the locations of the layouts relative to that in portions thereof where the layouts of the shoe upper and the sole parts are not provided, using one of a different weaving and knitting type for the layouts of the shoe upper than is used for producing the sole parts, said weaving and knitting types being matched to differing requirements for materials of the shoe upper and sole part of a shoe in relation to properties thereof including at least one of the properties of absorptivity, air permeability, softness, extensibility, wear resistance and appearance"
29. The article of	Claim 29 adds the same limitation to independent claim

Petitioner adidas AG - Exhibit 1001 - Page 63

Skechers EX1013-p. 498
Skechers v Nike

Nike '011 Patent Claims	Nishida
footwear recited in claim 24, wherein the textile element is one of an exterior layer, an intermediate layer, and an interior layer of the upper.	24 as claim 7 added to independent claim 1. Nishida describes the additional limitations of claim 29 – see discussion for claim 7 in chart.
30. The article of footwear recited in claim 24, wherein the textile element forms at least a portion of both an interior surface and an exterior surface of the upper.	Claim 30 adds the same limitation to independent claim 16 as claim 9 added to independent claim 1. Nishida describes the additional limitations of claim 30 or they are obvious in view of Curley, Shiomura or Glidden – see discussion for claim 9 in chart.
31. The article of footwear recited in claim 24, wherein the textile element forms an interior surface of the footwear, and at least one additional layer forms an exterior surface of the footwear.	Claim 31 adds the same limitation to independent claim 24 as claim 13 added to independent claim 1 – the textile element forming an interior surface of the footwear (or upper). Nishida describes this additional limitation of claim 31 or it is obvious in view of Curley, Shiomura, or Glidden – see discussion for claim 13 in chart. Claim 31 also recites an additional limitation – "at least one additional layer forms an exterior surface of the footwear." Nishida discloses this additional limitation. 2:37-39: "Only inside and/or outside stiffening elements, such as inside and/or outside toe caps, heel counters or the like have to be applied later on." 3:29-42:

Petitioner adidas AG - Exhibit 1001 - Page 64

Skechers EX1013-p. 499
Skechers v Nike

Nike '011 Patent Claims	Nishida
	"For example, areas 5 and 6 are provided for applying an inside or outside heel counter 9 (FIG. 3). After cutting out layout 2 from the web of material 1, the edges 7 and 8 are stitched together and a heel seam thus is formed. Then, heel counter 9, represented in FIG. 3, is applied, for example, glued and/or stitched, to adjacent areas 5 and 6. Correspondingly, the contours of edges 11 and 12 are stitched together in the form of shoe toe 10, and a seam is formed on the shoe toe. To reduce wear, a toe cap 15, represented in FIG. 3, can be applied, especially glued and/or stitched, on the front area, adjacent to front edge 13 of toe area 14." 4:9-11: "A heel counter 28, represented in FIG. 3, is applied on areas 26, 27 after formation of the initially described heel seam." In addition, Curley, Shiomura, and Glidden also disclose the limitation of "at least one additional layer forms an exterior surface of the footwear." Curley describes a three layer structure for an upper where there is additional layer other than the inner knit layer that forms an exterior surface of the footwear. (Curley, p. 6, lines 30-32; claim 34) Shiomura describes that wear-resistant leather materials may be added to the toe and heel portions of the shoe. (Shiomura, 2:20-35; Fig. 1) Glidden describes heel reinforcements, counters, and rubber coverings may be added to form an exterior surface of the shoe. (Glidden, p. 2, 1:9-19, 1:68-74; Figs. 1, 6, 8)
32. The article of	As discussed above for claim 1, Nishida describes the

Petitioner adidas AG - Exhibit 1001 - Page 65

Skechers EX1013-p. 500
Skechers v Nike