

071405

17581 U.S. PTO

PTO/SB/05 (09-04)

Approved for use through 07/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

ZXC-001

First Inventor

GLENN NORMAN SANDERS

Title

VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM

Express Mail Label No.

ED 474166683 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ **Fee Transmittal Form** (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ **Applicant claims small entity status.**
See 37 CFR 1.27.
3. ☒ **Specification** [Total Pages 50]
Both the claims and abstract must start on a new page
(For information on the preferred arrangement, see MPEP 608.01(a))
4. ☒ **Drawing(s)** (35 U.S.C. 113) [Total Sheets 13]
5. **Oath or Declaration** [Total Sheets 2]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ A copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
name in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
6. ☐ **Application Data Sheet.** See 37 CFR 1.76
7. ☐ **CD-ROM or CD-R** in duplicate, large table or
Computer Program (Appendix)
☐ Landscape Table on CD
8. **Nucleotide and/or Amino Acid Sequence Submission**
(if applicable, items a. - c. are required)
 - a. ☐ Computer Readable Form (CRF)
 - b. ☐ Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ Paper
 - c. ☐ Statements verifying identity of above copies

ADDRESS TO:

Commissioner for Patents
P.O. Box 1450
Alexandria VA 22313-1450

ACCOMPANYING APPLICATION PARTS

9. ☐ **Assignment Papers** (cover sheet & document(s))
Name of Assignee _____
10. ☐ **37 CFR 3.73(b) Statement**
(when there is an assignee) ☒ **Power of Attorney**
11. ☐ **English Translation Document** (if applicable)
12. ☐ **Information Disclosure Statement** (PTO/SB/08 or PTO-1449)
☐ Copies of citations attached
13. ☐ **Preliminary Amendment**
14. ☒ **Return Receipt Postcard** (MPEP 503)
(Should be specifically itemized)
15. ☐ **Certified Copy of Priority Document(s)**
(if foreign priority is claimed)
16. ☒ **Nonpublication Request** under 35 U.S.C. 122(b)(2)(B)(i).
Applicant must attach form PTO/SB/35 or equivalent.
17. ☐ **Other:** _____


18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in the first sentence of the specification following the title, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Prior application information: Examiner: _____ Art Unit: _____

19. CORRESPONDENCE ADDRESS

☒ The address associated with Customer Number: 000039689 OR ☐ Correspondence address below

Name					
Address					
City		State		Zip Code	
Country		Telephone		Fax	
Signature				Date	JULY 14, 2005
Name (Print/Type)	Rita C. Chipperson, Esq.			Registration No. (Attorney/Agent)	54,031

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Effective on 12/08/2004.

Fees pursuant to the Consolidated Appropriations Act, 2005 (H.R. 4818).

FEE TRANSMITTAL
For FY 2005☒ Applicant claims small entity status. See 37 CFR 1.27**TOTAL AMOUNT OF PAYMENT** (\$) 500.00**Complete if Known**

Application Number	TBA
Filing Date	JULY 14, 2005
First Named Inventor	GLENN NORMAN SANDERS
Examiner Name	TBA
Art Unit	TBA
Attorney Docket No.	ZXC-001

METHOD OF PAYMENT (check all that apply)☒ Check ☐ Credit Card ☐ Money Order ☐ None ☐ Other (please identify): _____☒ Deposit Account Deposit Account Number: 502864 Deposit Account Name: _____

For the above-identified deposit account, the Director is hereby authorized to: (check all that apply)

☐ Charge fee(s) indicated below ☐ Charge fee(s) indicated below, **except for the filing fee**☒ Charge any additional fee(s) or underpayments of fee(s) under 37 CFR 1.16 and 1.17 ☒ Credit any overpayments**WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.**FEE CALCULATION****1. BASIC FILING, SEARCH, AND EXAMINATION FEES**

Application Type	FILING FEES		SEARCH FEES		EXAMINATION FEES		Fees Paid (\$)
	Fee (\$)	Small Entity Fee (\$)	Fee (\$)	Small Entity Fee (\$)	Fee (\$)	Small Entity Fee (\$)	
Utility	300	150	500	250	200	100	500.00
Design	200	100	100	50	130	65	
Plant	200	100	300	150	160	80	
Reissue	300	150	500	250	600	300	
Provisional	200	100	0	0	0	0	

2. EXCESS CLAIM FEES**Fee Description**

Each claim over 20 (including Reissues)

Fee (\$)	Small Entity Fee (\$)
50	25

Each independent claim over 3 (including Reissues)

200	100
-----	-----

Multiple dependent claims

360	180
-----	-----

Total Claims	Extra Claims	Fee (\$)	Fee Paid (\$)
1 - 20 or HP =	0	x 25	= 0.00

HP = highest number of total claims paid for, if greater than 20.

Indep. Claims	Extra Claims	Fee (\$)	Fee Paid (\$)
1 - 3 or HP =	0	x 100	= 0.00

HP = highest number of independent claims paid for, if greater than 3.

Multiple Dependent Claims	
Fee (\$)	Fee Paid (\$)
0	0.00

3. APPLICATION SIZE FEE

If the specification and drawings exceed 100 sheets of paper (excluding electronically filed sequence or computer listings under 37 CFR 1.52(e)), the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).

Total Sheets	Extra Sheets	Number of each additional 50 or fraction thereof	Fee (\$)	Fee Paid (\$)
63	- 100 = 0	/ 50 = 0 (round up to a whole number) x	125	= 0.00

4. OTHER FEE(S)

Non-English Specification, \$130 fee (no small entity discount)

Fees Paid (\$)

Other (e.g., late filing surcharge): _____

SUBMITTED BY

Signature

Registration No. 54,031
(Attorney/Agent)

Telephone (973) 993-1878

Name (Print/Type)

Rita C. Chipperson, Esq.

Date JULY 14, 2005

This collection of information is required by 37 CFR 1.136. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 30 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

071405

17581 U.S. PTO

PTO/SB/05 (09-04)

Approved for use through 07/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	ZXC-001
First Inventor	GLENN NORMAN SANDERS
Title	VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM
Express Mail Label No.	ED 474166683 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ **Fee Transmittal Form** (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ **Applicant claims small entity status.**
See 37 CFR 1.27.
3. ☒ **Specification** [Total Pages 50]
Both the claims and abstract must start on a new page
(For information on the preferred arrangement, see MPEP 608.01(a))
4. ☒ **Drawing(s)** (35 U.S.C. 113) [Total Sheets 13]
5. **Oath or Declaration** [Total Sheets 2]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ A copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
name in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
6. ☐ **Application Data Sheet.** See 37 CFR 1.76
7. ☐ **CD-ROM or CD-R** in duplicate, large table or
Computer Program (Appendix)
☐ Landscape Table on CD
8. **Nucleotide and/or Amino Acid Sequence Submission**
(if applicable, items a. - c. are required)
 - a. ☐ Computer Readable Form (CRF)
 - b. **Specification Sequence Listing on:**
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ Paper
 - c. ☐ Statements verifying identity of above copies

ADDRESS TO: Commissioner for Patents
P.O. Box 1450
Alexandria VA 22313-1450

ACCOMPANYING APPLICATION PARTS


9. ☐ **Assignment Papers** (cover sheet & document(s))
Name of Assignee _____
10. ☐ **37 CFR 3.73(b) Statement** (when there is an assignee) ☒ **Power of Attorney**
11. ☐ **English Translation Document** (if applicable)
12. ☐ **Information Disclosure Statement** (PTO/SB/08 or PTO-1449)
☐ Copies of citations attached
13. ☐ **Preliminary Amendment**
14. ☒ **Return Receipt Postcard** (MPEP 503)
(Should be specifically itemized)
15. ☐ **Certified Copy of Priority Document(s)**
(if foreign priority is claimed)
16. ☒ **Nonpublication Request** under 35 U.S.C. 122(b)(2)(B)(i).
Applicant must attach form PTO/SB/35 or equivalent.
17. ☐ **Other:** _____

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in the first sentence of the specification following the title, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____
Prior application information: _____ Examiner: _____ Art Unit: _____

19. CORRESPONDENCE ADDRESS

☒ The address associated with Customer Number: 000039689 OR ☐ Correspondence address below

Name					
Address					
City		State		Zip Code	
Country		Telephone		Fax	
Signature				Date	JULY 14, 2005
Name (Print/Type)	Rita C. Chipperson, Esq.			Registration No. (Attorney/Agent)	54,031

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Effective on 12/08/2004.

Fees pursuant to the Consolidated Appropriations Act, 2005 (H.R. 4818).

FEE TRANSMITTAL
For FY 2005☒ Applicant claims small entity status. See 37 CFR 1.27**TOTAL AMOUNT OF PAYMENT** (\$) 500.00**Complete if Known**

Application Number	TBA
Filing Date	JULY 14, 2005
First Named Inventor	GLENN NORMAN SANDERS
Examiner Name	TBA
Art Unit	TBA
Attorney Docket No.	ZXC-001

METHOD OF PAYMENT (check all that apply)☒ Check ☐ Credit Card ☐ Money Order ☐ None ☐ Other (please identify): _____☒ Deposit Account Deposit Account Number: 502864 Deposit Account Name: _____

For the above-identified deposit account, the Director is hereby authorized to: (check all that apply)

☐ Charge fee(s) indicated below ☐ Charge fee(s) indicated below, **except for the filing fee**☒ Charge any additional fee(s) or underpayments of fee(s) under 37 CFR 1.16 and 1.17 ☒ Credit any overpayments**WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.**FEE CALCULATION****1. BASIC FILING, SEARCH, AND EXAMINATION FEES**

Application Type	FILING FEES		SEARCH FEES		EXAMINATION FEES		Fees Paid (\$)
	Fee (\$)	Small Entity Fee (\$)	Fee (\$)	Small Entity Fee (\$)	Fee (\$)	Small Entity Fee (\$)	
Utility	300	150	500	250	200	100	500.00
Design	200	100	100	50	130	65	
Plant	200	100	300	150	160	80	
Reissue	300	150	500	250	600	300	
Provisional	200	100	0	0	0	0	

2. EXCESS CLAIM FEES**Fee Description**

Fee Description	Fee (\$)	Small Entity Fee (\$)
Each claim over 20 (including Reissues)	50	25
Each independent claim over 3 (including Reissues)	200	100
Multiple dependent claims	360	180

Total Claims	Extra Claims	Fee (\$)	Fee Paid (\$)
1 - 20 or HP =	0	25	0.00

HP = highest number of total claims paid for, if greater than 20.

Indep. Claims	Extra Claims	Fee (\$)	Fee Paid (\$)
1 - 3 or HP =	0	100	0.00

HP = highest number of independent claims paid for, if greater than 3.

3. APPLICATION SIZE FEE

If the specification and drawings exceed 100 sheets of paper (excluding electronically filed sequence or computer listings under 37 CFR 1.52(e)), the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).

Total Sheets	Extra Sheets	Number of each additional 50 or fraction thereof	Fee (\$)	Fee Paid (\$)
63 - 100 =	0	0	125	0.00

4. OTHER FEE(S)

Non-English Specification, \$130 fee (no small entity discount)

Other (e.g., late filing surcharge): _____

SUBMITTED BY

Signature	<i>Rita C. Chipperson</i>	Registration No. (Attorney/Agent) 54,031	Telephone (973) 993-1878
Name (Print/Type)	Rita C. Chipperson, Esq.		Date JULY 14, 2005

This collection of information is required by 37 CFR 1.136. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 30 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM

BACKGROUND OF THE INVENTION

Embodiments of the present invention generally relate to systems and methods for
5 recording and processing audio received from one or more wireless devices. More
specifically, the present invention relates to systems and methods for recording and
processing audio having one or more tracks received from one or more wireless devices
operating in either an asynchronous or synchronous mode.

Many systems and methods have been created to record performance audio. Some
10 such systems include a multi-track audio recorder wired to one or more microphones.
Typically, one or more performers performing on a sound stage are recorded by one or
more microphones that are directly wired to the multi-track recorder. The multi-track
recorder combines the single track of audio received from each microphone to create one
multi-track audio file. In many such systems, the received audio and/or the multi-track audio
15 is timestamped with a time reference signal such as a Society of Motion Picture and
Television Engineers ("SMPTE") timecode signal containing information regarding the hour,
minute, second, frame, type of timecode (i.e., nondrop or drop frame), and user-definable
information. Such information allows audio to be more easily matched and/or combined with
simultaneously recorded video.

20 Other such systems include a multi-track audio recorder and an associated audio
receiver that receive audio wirelessly from one or more wireless transmitters. Such wireless
transmitters may take the form of body packs that are worn by each performer. Typically,

the audio receiver receives each performer's audio from the performer's respective body pack via an analog or digital wireless transmission and transmits it to the audio recorder. The audio recorder then combines the wireless transmissions received from all body packs to create one multi-track audio file.

5 Due to the occurrence of wireless transmission errors such as dropouts, some existing wireless systems include audio receivers having two or more redundant receiver circuits. The incorporation of additional, redundant receiver circuits provides a better opportunity to avoid missed audio transmissions. For example, the use of two receiver circuits may allow a second receiver to receive audio that may have not been received by a
10 first receiver circuit and vice versa. However, although such redundancy accounts may correct wireless transmission errors, such redundancy does not prevent loss of data due to interference (i.e., a distortion of the received audio signal due to receipt of multiple wireless signals). Upon the occurrence of interfering signals, audio created during a performance (e.g., a live performance) may simply be lost due to the inability of the receiver to receive a
15 clean audio signal.

SUMMARY OF THE INVENTION

A recording system for wirelessly recording audio is provided in one aspect of the present invention. More specifically, a wireless recording system is provided for wireless recording of performances in which each performer's local audio device is capable of
20 recording the respective performer's audio via a microphone, headset, or the like to prevent

or minimize the loss of audio data that typically occurs with use of wireless recording systems.

In one embodiment of the present invention, a recording system wirelessly records audio events, such as performances, movie takes, etc. having one or more performers. In some such embodiments, each performer dons a dedicated local audio device that receives audio generated by the respective performer through a microphone, headset, or the like. Each local audio device then records the audio received from its respective performer locally within the local audio device and associates individual segments of audio with highly accurate timestamps as compared to the timestamps of all other local audio devices.

Using the systems and methods of the present invention, an accuracy of approximately one millisecond ("ms") may be achieved between each local audio device's timestamps as compared to all other local audio device timestamps. Such accuracy is required to provide high quality audio and to prevent phasing artifacts that may occur when multiple tracks of audio are combined to create one or more multi-track audio files. However, the systems and methods discussed herein are not so limited. They may be equally utilized to record lower quality audio without departing from the scope of the present invention.

Furthermore, using the systems and methods of the present invention, an accuracy of approximately thirty ms may be achieved for the combined audio file as compared to a master clock. Such accuracy is required to allow such an audio file to be combined with other timestamped files (e.g., video files) such as is commonly performed in the motion

picture and television industries. Although the systems and methods discussed herein are capable of achieving the required accuracies, they may be equally utilized to record lower quality audio that is not combined with other timestamped files without departing from the scope of the present invention.

5 In one aspect of the present invention, highly accurate timestamps are generated at each local audio device based upon the timecodes provided by a local, on board timecode generator. In some such embodiments, the local timecode generators of all local audio devices are synchronized to a master timecode source to maintain the accuracy of each local audio device's timestamps relative to all other recording system devices.

10 Synchronization may be performed via hardware or software designed to continuously compare master timecodes to locally generated timecodes such that the speed of each local timecode generator may be adjusted as necessary to keep pace with the master timecode source.

In some embodiments of the present invention, in addition to locally recording audio

15 received from its respective performer, local audio devices also wirelessly transmit the received audio to a master recorder (e.g., a multi-track recorder that combines all received audio into one or more audio files). In such embodiments, the ability to synchronize the timestamps generated by each component of the recording system with a master timecode source via the systems and methods of the present invention allows any audio that is not

20 recorded by the master recorder during a performance due to, for example, transmission errors or interference to be recovered after the performance. In this scenario, after the performance or take ends, the local audio devices are commanded to replay any segments

of audio that were not recorded during the original performance. During replay, the master recorder re-records the lost audio segments and inserts them into the previously recorded audio based upon the synchronized timestamp data.

In some embodiments of the present invention, a component of the recording system automatically senses an error in transmission. Upon sensing such an error, playback of the audio recorded locally on all local audio devices beginning at a timecode prior to the occurrence of the transmission error is automatically initiated. Alternatively, playback may be requested manually by a user of the recording system. In this scenario, upon hearing that a transmission error (i.e., a loss of audio data) has occurred, the user manually initiates a command to all local audio devices to playback the audio stored in their respective memories that occurred subsequent to a time reference entered by the user. Such prompting may occur after the audio event ends or immediately upon hearing the transmission error. If the latter option is chosen, prompting playback of a specific segment of the audio event may index the local audio devices to store the requested data in a protected memory location until the end of the audio event to avoid disrupting the live recording. In this scenario, all requested audio shall be replayed after the performance ends. In embodiments of the present invention in which data is recorded in a loop (i.e., when memory is full, new data overwrites previously recorded data), writing the data to a protected memory location removes it from the loop and protects it from being overwritten.

In other embodiments of the present invention, the local audio devices may asynchronously record the performance. In such embodiments, audio recorded locally at the local audio devices may be intermittently stamped with timestamps generated from timecodes created by a master timecode source. Such master timecode source may be

contained internal or external to the local audio devices. In the latter embodiment, timecodes may be received wirelessly from the master timecode generator.

In embodiments of the present invention in which master timecodes are received wirelessly, some timecodes may be lost due to transmission errors, interference, and the like. Or, regardless of how such timecodes are received at the local audio devices, such timecodes may simply be received less frequently than those that would be generated locally. In such cases, the present invention provides systems and methods for accurately interpolating timestamps for unstamped audio samples (i.e., audio samples that are not associated with a master timecode timestamp) based upon the timestamps of stamped audio samples (i.e., audio samples that are associated with a master timecode timestamp) and resampling the audio samples to include the interpolated timestamps in accordance with embodiments of the present invention.

In one aspect of the present invention, the resampling process analyzes the occurrence of the relatively sparse timestamped audio samples to generate a linear interpolation or a best fit curve. This curve is then used to interpolate timestamps for the unstamped audio samples. After the timestamp of each audio sample has been interpolated, the audio samples may then be re-sampled such that the audio samples are now synchronized with samples generated by the master timecode generator. Consequently, each resulting resampled audio file appears as if it was originally sampled with an accurate audio sample clock derived from the master timecode source. This resampling allows each audio file to include a single timestamp that marks the master timecode of the first audio sample of the audio file. Furthermore, since the audio files now appear as if they have been sampled by an extremely accurate audio sample clock, each

audio sample's timestamp may be accurately calculated based solely on the audio sample rate and the timestamp of the first audio sample of the audio file. This condition allows the audio files to be formatted and/or stored as a standard timecoded broadcast .WAV file, thereby allowing them to be read, edited, etc. used standard, commercially-available editing systems. That is, the files may be processed in the same manner as if the audio file had been generated by a standard multi-track audio recorder. Such condition allows the present invention to be easily integrated with other industry standard recording equipment.

In other aspects of the present invention, a similar interpolation algorithm may be incorporated to break down single large audio files (e.g., an audio file recording the filming of multiple movie takes over a continuous eight hour period as a single eight-hour audio file) into smaller, more useful files (e.g., one audio file per take). These smaller files will allow the audio recorded locally by the local audio devices to be more easily matched or synchronized with the individual audio files recorded by a master recorder.

In one use of an embodiment of the present invention, multiple local audio devices store audio samples with wirelessly-received timecode and transport status samples continuously for the entire duration of the work day (e.g., an 8 hour period). In a typical scenario, while the local audio devices are recording continuously, a technician intermittently records segments of the eight-hour audio event. For example, in a film setting, each segment would typically represent a movie 'take' and might range from one to five minutes in duration. Consequently, the master recorder generates individual audio files (i.e., at least one audio file for each recorded segment such as a movie take), whereas the each local audio device generates one massive audio file. Therefore, there is a need for a method of segmenting each large local audio file into smaller audio files that correspond to the

segments recorded by the master recorder.

The segmentation method (i.e., the method of segmenting the large local audio devices' files to match the multiple, smaller master recorder's audio file) requires knowledge of which portions of the single local audio device audio file are important and which portions can be discarded. This information can be inferred from the transport status of the master recorder since it is typically operated by someone with this knowledge. Therefore, when the transport status of the master recorder changes from stop to record, it can be inferred that a new master recorder audio file begins, and, subsequently, when the transport status of the master recorder changes from record to stop, it can be inferred that the same master recorder audio file has ended. In addition, when the transport status of the master recorder remains in the stop mode, it can be inferred that the audio recorded by the local audio device during this time period may be discarded. This audio may be discarded post-processing or during recording using the systems and methods of the present invention.

To facilitate manipulation of locally recorded audio and recovery of lost audio, the systems and methods of the present invention also provide a multi-disk drive for performing actions such as reformatting, resampling, segmenting, combining, and the like with the audio files recorded on a plurality of local audio device memories. In its simplest form, the multi-memory unit includes a plurality of individual memory ports (e.g., flash memory card drives, compact flash memory card drives, USB thumbdisk ports, etc.). In one aspect of the present invention, the memory of each local audio device may be removed after completion of a performance, videotaping, etc. Each memory may then be inserted into a corresponding one of the memory ports of the multi-memory unit. Thereafter, all of the

individual audio files may be combined to provide one or more comprehensive audio files. Or, alternatively, each audio file may be individually reformatted, resampled, segmented, or otherwise manipulated prior or subsequent to creation of one or more comprehensive audio file.

5 Other objects, features, and characteristics of the present invention, as well as the methods of operation and functions of the related elements of the structure, and the combination of parts and economies of manufacture, will become more apparent upon consideration of the following detailed description with reference to the accompanying drawings, all of which form a part of this specification.

BRIEF DESCRIPTION OF THE DRAWINGS

A further understanding of the present invention can be obtained by reference to the embodiments set forth in the illustrations of the accompanying drawings. Although the illustrated embodiments are exemplary of systems for carrying out the present invention, 15 both the organization and method of operation of the invention, in general, together with further objectives and advantages thereof, may be more easily understood by reference to the drawings and the following description. The drawings are not intended to limit the scope of this invention, which is set forth with particularity in the claims as appended or as subsequently amended, but merely to clarify and exemplify the invention.

20 [0001] For a more complete understanding of the present invention, reference is now made to the accompanying drawings in which:

[0002] FIG. 1 depicts the components of a recording system in accordance with one embodiment of the present invention including, *inter alia*, local audio devices, a remote control unit, a receiver, and a recorder.

[0003] FIG. 2A depicts a block diagram of the internal components of a remote control unit in accordance with one embodiment of the present invention.

[0004] FIG. 2B depicts an external view of a remote control unit in accordance with one embodiment of the present invention.

[0005] FIG. 3A depicts a block diagram of the internal components of a local audio device in accordance with one embodiment of the present invention.

[0006] FIG. 3B depicts an external view of a remote control unit in accordance with one embodiment of the present invention.

[0007] FIGS. 4A and 4B depict a process for operation of a recording system in a synchronous timecode generator mode in accordance with one embodiment of the present invention.

[0008] FIG. 5 depicts a process for modifying the speed of a local timecode generator as necessary to maintain its synchronization with a master timecode generator in accordance with one embodiment of the present invention.

[0009] FIG. 6 depicts a process for recording audio and for replaying and re-recording segments of missed audio in accordance with one embodiment of the present invention.

[0010] FIG. 7 depicts a process for operation of a recording system in asynchronous timecode generator mode in accordance with one embodiment of the present invention.

[0011] FIG. 8 depicts an external view of a multi-memory unit in accordance with one embodiment of the present invention.

5 [0012] FIG. 9 depicts a process for interpolating timestamps for unstamped audio samples based upon the timestamps of stamped audio samples, and resampling the audio samples to include the interpolated timestamps in accordance with one embodiment of the present invention.

10 [0013] FIG. 10 depicts a process for segmenting a single large audio file into multiple smaller files that correlate to a master directory of files in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION

As required, a detailed illustrative embodiment of the present invention is disclosed
15 herein. However, techniques, systems and operating structures in accordance with the present invention may be embodied in a wide variety of forms and modes, some of which may be quite different from those in the disclosed embodiment. Consequently, the specific structural and functional details disclosed herein are merely representative, yet in that regard, they are deemed to afford the best embodiment for purposes of disclosure and to
20 provide a basis for the claims herein, which define the scope of the present invention. The

following presents a detailed description of one embodiment (as well as some alternative embodiments) of the present invention.

Referring first to FIG. 1, depicted is recording system **100** in accordance with one embodiment of the present invention. Recording system **100** wirelessly records audio events, such as performances, movie takes, etc. having one or more performers. In one aspect of the present invention, all of the components of recording system **100** are synchronized to allow each component to accurately stamp its recorded audio with the time at which it occurred such that the timestamps (i.e., information stored with an audio sample or audio file conveying the time at which the audio sample or first audio sample of the file occurred) created by each individual component of recording system **100** are highly accurate as compared to the timestamps created by all other components of recording system **100**. This accuracy allows multiple individually recorded audio tracks to be combined into one or more multi-track audio files electronically post-recording. Furthermore, this accuracy allows recording system **100** to automatically correct for any audio data lost during an original recording due to wireless transmission problems such as dropout, interference, etc. This automatic correction may be performed either electronically or via synchronized playback of the individually recorded audio tracks. In another aspect of the present invention, the audio recorded by recording system **100** may be recorded asynchronously. In this scenario, the audio is synchronized and/or mixed post-recording to automatically correct for any audio data lost due to wireless transmission problems such as dropout, interference, etc.

In the embodiment of the present invention depicted in FIG. 1, recording system **100** includes local audio devices **102**, remote control unit ("RCU") **104**, receiver **106**, and

recorder **108**. In one embodiment, RCU **104** includes an RF transmitter capable of transmitting one or more of a time reference signal, digital commands, and audio to one or more other components of recording system **100**. Additionally, RCU **104** may be equipped with the capability of remotely controlling local audio devices **102**, receiver **106**, and recorder **108** to perform tasks including, but not limited to, initiating audio playback of all local audio devices **102** starting at the same time reference, as well as recording thereof by receiver **106** and recorder **108**.

Both live and replayed audio transmitted by local audio devices **102** may be received at receiver **106** and recorded by audio recorder **108**. Receiver **106** and recorder **108** may be virtually any commercially available receiver and recorder. Receiver **106** receives the wireless RF signals (e.g., modulated RF carrier signals) generated by all active local audio devices **102** and converts the signals to a format capable of being recorded by a commercially available recording device including, but not limited to, Zaxcom, Inc.'s DEVA[®] multi-track recorder. In some embodiments, such commercially available recording devices record audio with a locally generated SMPTE-compatible timecode signal.

The ability to synchronize the local timestamps at each local audio device **102** and recorder **108** using the methods of the present invention as discussed in greater detail below allows any audio that is not recorded by recorder **108** during an event due to transmission errors to be recovered by replaying the missed audio and recording the replayed audio in the correct time sequence with respect to the other audio samples. In other words, since the audio samples are stored locally in each local audio device **102** with timestamps that are synchronized with the timestamps of recorder **108**, whenever audio is

not recorded at recorder **108**, it may simply be replayed at local audio devices **102** starting at the timecode of the missed audio. Since the local audio device and recorder timestamps are synchronized, the replayed audio may be inserted in the proper time sequence with respect to the other recorded audio samples based upon the synchronized timestamp data.

5 Synchronization is essential to ensure that each performer's audio is synchronized with all other performers' audio and to ensure that the newly recorded replayed audio is in the correct sequence with respect to the previously recorded live audio. Such synchronization must maintain a high accuracy for each performer's timestamps with respect to all other performers' timestamps to prevent the occurrence of phasing artifacts when the multiple
10 audio recordings are combined to create one single recording.

In some embodiments of the present invention, receiver **106** automatically senses an error in transmission caused by, for example, a communication loss, interference, etc. In some embodiments of the present invention, the error in transmission is sensed by comparing a calculated checksum to the transmitted checksum to determine if data was lost
15 during transmission. An error is determined if the calculated and transmitted checksums do not match. Upon sensing a transmission error, receiver **106** may transmit a request to RCU **104** requesting playback of the audio recorded locally on local audio devices **102** beginning at a timecode prior to the occurrence of the transmission error. In response, RCU **104** transmits a digital command to all local audio devices **102** to playback the audio stored in
20 the respective memory **332** (FIG. 3) that occurred subsequent to the timecode requested by receiver **106** in the manner described below with respect to FIG. 6.

Alternatively, playback may be requested manually by a user of a recording system such as recording system **100**. In this scenario, upon hearing that a transmission error (i.e.,

a loss of audio data) has occurred, the user manually prompts RCU **104** to transmit a digital command to all local audio devices **102** to playback the audio stored in memory **332** (FIG. 3) that occurred subsequent to a time reference entered at RCU **104** by the user. Such prompting may occur after the audio event ends or immediately upon hearing the transmission error. If the latter option is chosen, prompting playback of a specific segment of the audio event may index the local audio devices to store the requested data in a protected memory location until the end of the audio event to avoid disrupting the recording. In this scenario, all requested audio shall be replayed after the performance ends. In embodiments of the present invention in which data is recorded in a loop (i.e., when memory is full, new data overwrites previously recorded data), writing the data to a protected memory location removes it from the loop and protects it from being overwritten.

FIG. 2A depicts a block diagram of one embodiment of RCU **104** in accordance with the present invention. In this embodiment, RCU **104** includes, *inter alia*, RCU timecode generator **204**, RCU power supply **206**, RCU transmitter **208**, RCU local control unit **210**, RCU audio input device **212**, RCU audio input device port **214**, RCU preamp **216**, RCU display **218**, RCU keypad **220**, RCU ADC **222**, RCU amp **226**, timecode input port **228**, external interface **252**, and external interface port **254**.

RCU transmitter **208** allows RCU **104** to transmit a master time reference signal, digital commands, audio, and the like to other devices such as local audio devices **102**, receiver **106**, and recorder **108**. In one aspect of the present invention, the time reference signal is a SMPTE timecode signal containing information regarding the hour, minute, second, frame, type of timecode (i.e., nondrop or drop frame), and user-definable information (e.g., the transport status of recorder **108**, the name of a scene, the name of a

take, etc.). This master time reference signal provides a time reference for all local audio devices **102**, which may use this information for a variety of purposes such as jam synchronizing their respective local timecode generators **304** (FIG. 3A), adjusting the speed of the local timecode generators **304** (FIG. 3A), timestamping locally recorded audio, etc.

5 The master time reference signal may be generated on board remote control unit **104** via a mechanism such as RCU timecode generator **204**. Or, alternatively, the master time reference signal may be generated by an independent timecode generator that transmits timecodes to remote control unit **104** wirelessly or via a cable or the like connected from the independent timecode generator to timecode input port **228**. In the latter scenario, the
10 timecodes received via timecode input port **228** are buffered and/or amplified by RCU amp **226** prior to transmission to RCU local control unit **210**.

When recording system **100** is operating in a synchronous mode, transmission of the master time reference signal ensures that all of the components of recording system **100** store all locally recorded audio with timestamps that are highly accurate as compared to the
15 timestamps of all other local audio devices **102** and/or all other components of recording system **100**. The timestamps are then used during playback and recording to ensure that the replayed audio from all local audio devices **102** is synchronized with previously recorded audio and with the audio replayed by all other local audio devices **102**. In contrast, when recording system **100** is operating in an asynchronous mode, transmission of the master
20 time reference signal allows the files containing recorded audio to be timestamped with the master time reference information to allow the recorded audio to be accurately synchronized post-recording.

RCU transmitter **208** also allows audio generated locally at RCU **104** to be

transmitted to the other components of recording system **100**. Such audio may be received from an audio input device such as RCU audio input device **212** via audio input device port **214**. RCU audio input device **212** may be any type of commercially available audio input device such as a microphone and audio input device port **214** may be any commercially available audio input device port that is compatible with RCU audio input device **212** and the internal components of RCU **104**. The received audio as well as any digital signals (e.g., microphone input level, line input level, etc.) is then buffered and/or amplified by RCU preamp **216** and is converted from analog to digital by RCU ADC **222** such that the audio may be read in digital form by RCU local control unit **210**. This audio may then be processed and sent via RCU transmitter **208** in either analog or digital form. If the audio is to be sent in analog form, RCU local control unit **210** may be equipped with an on-board DAC or an independent DAC may be incorporated in RCU **104** without departing from the scope of the present invention. Or, alternatively, analog audio received from RCU audio input device **212** may be passed directly to RCU transmitter **208** for transmission in analog form to the other components of the recording system. In such embodiments, RCU transmitter **208** may be equipped with a frequency modulation ("FM") modulator or the like. Furthermore, in such embodiments, although the analog audio is passed through to RCU transmitter **208**, the audio signal may be additionally converted to digital form for local recording of the received audio. In yet another alternate embodiment, audio may be transmitted and recorded in analog form thereby eliminating RCU ADC **222**.

In some embodiments of the present invention, RCU local control unit **210** may be a digital signal processor such as Texas Instruments part number TMS320C5509A. However, the present invention is not so limited. Any combination of hardware and software may be

substituted for any component described herein without departing from the scope of the present invention.

RCUs **104** may be handheld units such as the RCU **104** depicted in FIG. 2B. In such an embodiment, display **218** may be a small liquid crystal display (“LCD”) or the like and keypad **220** may include a plurality of buttons that allow a user to perform local RCU functions including, but not limited to, those that relate to RCU transmitter frequency, group identification (“ID”) code, unit ID code, and timecode generator mode. For example, the RCU transmitter frequency may be adjustable in predetermined frequency steps. In most cases, this frequency will be set to match the receiving frequency of other devices in the recording system (e.g., local audio devices). Or, when multiple local audio devices are incorporated into a group with an RCU, the RCU as well as other components of the recording system (e.g., local audio devices) may be assigned a group ID to ensure that the RCU is controlling the correct group of local audio devices. Similarly, the unit ID identifies the specific one of multiple local audio devices that a user wishes to control. Setting the unit ID ensures that the control signals transmitted by the RCU are received by the correct local audio device. Also, timecode generator mode allows the RCU to either generate its own timecodes or to receive timecodes from an external timecode generator.

In addition to allowing a user to modify local RCU settings, RCU keypad **220** and display **218** also allow the RCU to remotely control individual local audio devices. The user may perform a variety of functions for the local audio device including, but not limited to, transmitter and receiver frequencies, transmitter enable, microphone gain, high pass filter, record mode select, time code entry, playback control, audio bank

storage, and status request.

For example, local audio device transmitter and receiver frequencies may be adjustable in predetermined frequency steps. Alternatively, the local audio device transmitter may be remotely enabled and disabled. Microphone gain may be adjusted, which in turn adjusts the current setting of a preamp such as local preamp **316**.

Adjustment of the high pass filter may be incorporated to enable and disable, or otherwise adjust, the high pass audio filter of the audio input device such as audio input device **312**.

In addition, record mode select allows recording modes such as endless loop record mode or timed record mode to be remotely adjusted. Timecodes may also be set remotely for each local audio device. Playback control allows one or more local audio devices to be commanded remotely to playback audio starting at a specific timecode. Completion of playback may be automatically or manually determined. Functions such as audio bank storage allow a remote user to manually store chunks of audio data in safe locations of the local audio device memory (i.e., in locations in which the audio data will not be overwritten).

Finally, status of the local audio device may be requested. The status may be provided via display **218** or via spoken language generated by local audio device **102** and transmitted to a receiver or receiver/recorder combination for recording with the recorded audio.

Although many specific features and functions for the RCU have been delineated herein, other features and functions may be added or eliminated without departing from the scope of the present invention.

Additionally, handheld embodiments may include any one of a variety of commercially available batteries to function with the power supply **206** without departing

from the scope of the present invention. Power supply **206** may be virtually any power component or combination thereof that is compatible with the other components of RCU **104** including, but not limited to, a Texas Instruments TPS62000DGS Power Module alone or in combination with a Linear Technology LTC3402 Synchronous Boost Converter.

5 However, non-handheld embodiments of RCU **104** are also envisioned such as tabletop models, personal computer ("PC") models, etc. Also, RCU **104** may be optionally equipped with external interface **252** (FIG. 2A) to facilitate connection of RCU **104** to a PC, laptop PC, dumb terminal, or the like via external interface port **254**. Such an interface allows a user to control the components of recording system **100** via a graphical user
10 interface or other software that may operate on a larger user interface. Such an interface may provide more features and functions than that available on a portable, handheld device such as programming and execution of complex playback scenarios, automatic initiation of complex playback scenarios based upon detected audio transmission errors, etc.

Turning next to FIG. 3A, depicted is a block diagram of one embodiment of local
15 audio device **102** in accordance with the present invention. In one aspect of the present invention, local audio devices **102** are digital, wireless audio transceivers. Such audio devices may be manufactured in the form of body-packs, such as those typically worn by news announcers, performers, and the like. In the depicted embodiment, local audio device **102** includes, *inter alia*, local receiver **302**, local timecode generator **304**, local power supply
20 **306**, local transmitter **308**, local control unit **310**, local audio input device **312**, local audio input device port **314**, local preamp **316**, local display **318**, local keypad **320**, local ADC **322**, local DAC **324**, local amp **326**, local audio output device port **328**, local audio output device **330**, memory **332**, comparator **334**, oscillator **336**, and counter **338**.

Local transmitter **308** also allows audio generated locally at local audio device **102** to be transmitted to the other components of recording system **100**. Such audio may be received from an audio input device such as local audio input device **312** via local audio input device port **314**. Local audio input device **312** may be any type of commercially available audio input device such as a microphone and local audio input device port **314** may be any commercially available audio input device port that is compatible with local audio input device **312** and the internal components of local audio device **102**. The received audio as well as any digital signals (e.g., microphone input level, line input level, etc.) is then buffered and/or amplified by local preamp **316** and is converted from analog to digital by local ADC **322** such that the audio may be read in digital form by local control unit **310**. This audio may then be processed and sent via local transmitter **308** in either analog or digital form. If the audio is to be sent in analog form, local control unit **310** may be equipped with an on-board DAC or an independent DAC may be incorporated in local audio device **102** without departing from the scope of the present invention. Or, alternatively, analog audio received from local audio input device **312** may be passed directly to local transmitter **308** for transmission in analog form to the other components of the recording system. In such embodiments, local transmitter **308** may be equipped with a frequency modulation ("FM") modulator or the like. Furthermore, in such embodiments, although the analog audio is passed through to local transmitter **308**, the audio signal may be additionally converted to digital form for local recording of the received audio. In yet another alternate embodiment, audio may be transmitted and recorded in analog form thereby eliminating local ADC **322**.

In some embodiments of the present invention, local control unit **310** may be a digital signal processor such as Texas Instruments part number TMS320C5509A. However, the

present invention is not so limited. Any combination of hardware and software may be substituted for any component described herein without departing from the scope of the present invention.

Similarly, local receiver **302** allows audio received from other components of recording system **100** to be played locally at local audio device **102**. Such audio may be received in either analog or digital form at local receiver **302**. However, if the audio is to be received in analog form, local control unit **310** may be equipped with an on-board ADC or an independent ADC may be incorporated in local audio device **102** without departing from the scope of the present invention to allow local control unit **310** to receive the audio in digital form. Thereafter, the audio may be processed or relayed directly to local DAC **324**, which converts the audio data back to analog form. The analog audio may then be amplified by local amp **326** prior to transmission through local audio output device port **328** to local audio output device **330**. Local audio output device **330** may be any type of commercially available audio output device such as headphones, speakers, and the like, and local audio output device port **328** may be any commercially available audio output device port that is compatible with local audio output device **330** and the internal components of local audio device **102**. Local receiver **302** may be virtually any receiver compatible with the other components of local audio device **102** including, but not limited to, a Micrel Semiconductor MICRF505 RadioWire[®] transceiver.

Memory **332** of local audio device **102** locally stores audio processed by local control unit **310** in one or more audio files. In one aspect of the present invention, local control unit **310** receives recordable audio from local audio input device **312**, which may be worn by the performer and connects to local audio device **102** at local audio input device port **314**.

However, in alternate embodiments, local control unit **310** may also receive audio from other components of recording system **100** via local receiver **302**. The locally stored audio files include timestamps (e.g., timestamps may be stored in the header of the audio file) that indicate when, during the audio event, each segment of audio occurred. The timestamps
5 may be generated based upon timecodes created by local timecode generator **304** or based upon master timecodes. Such master timecodes may be received using a plurality of methods or components including, but not limited to, wirelessly from a master timecode source through local receiver **302**, from a timecode source connected to local audio input device port **314**, and from local audio input device **312** wherein the master timecodes are
10 received from an ultrasonic signal. Local timecode generator **304** may be synchronized with the master timecode generator during recording of the audio event as described in further detail below with respect to FIG. 5. Or, alternatively, the timestamps may be synchronized post-recording as described in further detail below with respect to FIGS. 9 and 10. Simultaneous with the local recording of audio received from local audio input device **312**,
15 this audio may also be transmitted through local transmitter **308** to receiver **106** and/or recorder **108** to allow recording of the audio event. In this scenario, receiver **106** and/or recorder **108** may simultaneously record a multi-track recording of all of the single tracks of audio received from local audio devices **102**, which are worn by the performers of the audio event.

20 Memory **332** may be virtually any type of commercially available removable or non-removable memory including, but not limited to, flash memory cards, compact flash memory cards, Universal Serial Bus ("USB") thumbdisks, and the like. Use of removable memories **332** facilitates removal and insertion of these memories into a PC or the like for electronic

combination or mixing of the recorded audio data. Such electronic mixing may be performed via commercially available software such as Pro Tools or the like and may be performed in addition to or in lieu of live wireless recording of the audio event.

Local audio devices **102** also receive non-audio information (e.g., time reference signals, digital commands, audio, etc.) from other components of recording system **100** via local receiver **302**. During synchronous operation of recording system **100**, a portion of the received data may be used to synchronize local timecode generator **304** to the master timecode generator integral to one of the components of recording system **100** (e.g., RCU **104**, recorder **108**, etc.) using a process such as that described below with respect to FIGS. 4A, 4B, and 5 or an equivalent thereof. Alternatively, during asynchronous operation of recording system **100**, the received data may include master timecodes from the master timecode generator that may be used to timestamp individual audio samples and/or files such that the audio received at multiple local audio devices **102** may be synchronized post-recording using one of the methods discussed below with respect to FIGS. 9 and 10 or an equivalent thereof.

As described in further detail below with respect to FIG. 5, local audio devices **102** operating in the synchronous mode may require one or more of comparator **334**, oscillator **336**, and counter **338**. In one aspect of the present invention, oscillator **336** is a 48 kilohertz ("kHz") voltage controlled oscillator. However, alternate embodiments of oscillator **336** may be substituted without departing from the scope of the present invention including but not limited to a high speed clock divided to produce 48 kHz. In the embodiment of the present invention depicted in FIG. 3A, oscillator **336** feeds the sample rate input of local ADC **322**, as well as counter **338**, which provides a time reference for local timecode generator **304**.

In this configuration, if local ADC **322** is set to operate at 48 kHz, varying the voltage applied to the clock control input of oscillator **336** will proportionately vary the output of oscillator **336** and, consequently, the sample rate of local ADC **322** and the rate at which local timecode generator **304** keeps time.

5 When local audio devices **102** such as those depicted in FIG. 3A are used in conjunction with recorders **108** that incorporate a single clock to both regulate the speed of the master timecode generator and control the internal recorder ADC sample rate, comparators **334** help maintain synchronization of local audio devices **102** with each other and with recorder **108** by varying the speed of the respective local timecode generators **304**
10 and the sampling rate of the respective local ADCs **322**. As per an algorithm or hardwired logic that duplicates the sequence depicted in FIG. 5, or an equivalent thereof, comparators **334** compare the timecodes generated by the master timecode generator with timecodes generated by the locally timecode generator and, if necessary, increase or decrease the speed of the respective local timecode generator **304** and the sampling rate of the
15 respective local ADC **322** such that these speeds are synchronized with the speed of the master timecode generator and the ADC of recorder **108**. That is, comparators **334** generate, through software or hardware, the voltage that is applied to the clock control input of the respective oscillator **336** that proportionately varies the sample rate of local ADC **322** and the rate at which local timecode generator **304** keeps time as necessary to maintain
20 synchronization with the sample rate of the ADC of recorder **108** and the master timecode generator, respectively. In this manner, all local audio devices **102** and recorder **108** sample at virtually identical sample rates allowing a wireless recorder **108**, or a wireless recorder/receiver combination, to accurately combine multiple independent tracks of audio,

wherein each independent track of audio is received from one of the performer's local audio device **102**.

Whenever playback of locally recorded audio is required (e.g., to remedy recording errors caused by transmission losses), RCU **104** transmits a digital command to all local audio devices **102** to playback the audio data stored in the respective memories **332** starting with and subsequent to a specific time reference as indicated by a specific timecode. The digital command is received by local receivers **302**, which transmit or relay the command to their respective local control unit **310**. Thereafter, local control units **310** access the data stored in the respective memory **332** and cause this data to be played or transmitted sequentially via local transmitter **308** starting with the data associated with the requested timecode. The use of timecodes and synchronization of local and master timecode generators, as well as local and recorder audio sampling rates, as discussed herein allows multiple local audio devices **102** to replay audio with the exact timing that occurred during the audio event.

Local audio devices **102** may be bodypacks such as the local audio device **102** depicted in FIG. 3B. In such an embodiment, display **318** may be a small liquid crystal display ("LCD") or the like and keypad **320** may include a plurality of buttons that allow a user to perform functions including, but not limited to, those that relate to transmitter frequency, receiver frequency, microphone gain, high pass filter, group ID code, unit ID code, transmitter encryption code, and transmitter operating mode. For example, transmitter and receiver frequencies may be adjustable in predetermined frequency steps. Microphone gain may be adjusted, which in turn adjusts the current setting of a preamp such as local preamp **316**. Adjustment of the high pass filter may be

incorporated to enable and disable, or otherwise adjust, the high pass audio filter of the audio input device such as audio input device **312**.

When multiple local audio devices are incorporated in to a group, each local audio device in the group as well as other components of the recording system (e.g., an RCU) may be assigned a group ID. Similarly, the unit ID identifies each specific local audio device within the group of local audio devices.

For local audio devices transmitting encrypted audio and data, the transmitter encryption code is set to match the encryption code of all receiving devices (e.g., an RCU, recorder, or receiver). Correctly setting this code allows the receiving device to properly decrypt the received transmission, while preventing unauthorized users from recording the data.

The operating mode of each local audio device can encompass any one of a number of modes. For example, the operating modes may include USA or European modes, as well as stereo modes. Selection of a specific mode may alter settings such as transmitter bandwidth, audio sampling parameters, and the like.

Although many specific features and functions for the local audio devices have been delineated herein, other features and functions may be added or eliminated without departing from the scope of the present invention.

Additionally, handheld embodiments may include any one of a variety of commercially available batteries to function with the power supply **306** without departing from the scope of the present invention. Power supply **306** may be virtually any power component or combination thereof that is compatible with the other components of local audio device **102** including, but not limited to, a Texas Instruments TPS62000DGS Power

Module alone or in combination with a Linear Technology LTC3402 Synchronous Boost Converter.

Alternate embodiments of local audio device **102** are envisioned in which local receiver **302** is eliminated. In one such embodiment, local transmitter **308** is enabled
5 whenever an audio event requiring recording is occurring. Local timecode generator **304** may be designed to generate timecodes whenever local transmitter **308** is enabled. When local transmitter **308** is not operating, the current value of local timecode generator **304** is stored in non-volatile memory to allow local timecode generator **304** to continuing counting from the last generated timecode when the local transmitter **308** is re-enabled. Such
10 embodiments include a timecode generator capable of generating unique timecodes for several years without a repeated timecode.

During recording, each local audio device **102** transmits data to one or more receivers and/or recorders. During recording, the receivers and/or recorders automatically detect corrupted audio data received from local audio devices **102** and maintain a list of
15 same. The list of corrupted audio data contains references to the respective local audio device **102** from which the corrupted audio data was received to allow such data to be recovered post-recording.

Post-recording, memories **332** may be removed from each local audio device **102** such that locally recorded data may be retrieved and used to repair the corruption of the
20 audio file generated by the receiver/recorders that occurred due to the receipt of corrupted audio data. Such data recovery may be performed using the multi-memory unit of the present invention or an equivalent. In one embodiment, the multi-memory unit may connect directly to the receivers and/or recorders to allow this equipment to directly

retrieve the required audio data. In another embodiment, memories **332** may be connected directly to the receivers/recorders for retrieval of the audio data, thereby eliminating the need for any extraneous equipment such as a personal computer.

Since the timecodes generated locally by each local audio device **102** may vary
5 with respect to each other, the receivers, and/or the recorders, the present invention provides a method for ensuring that audio data retrieved from memories **332** is inserted in the proper time sequence with respect to the audio file(s) generated by the receiver/recorders. To achieve this, during recording, the receiver(s) and/or recorders generate or populate a cross-reference table, database, or the like that correlates the
10 timecodes of the audio files generated by the receiver/recorders, as well as the timecodes of all audio data received from all local audio devices **102**. That is, the cross-reference mechanism correlates each timecode generated by a receiver or recorder to each timecode generated by each local audio device. In this manner, the timecodes of audio retrieved from memories **332** may be cross-referenced to determine the correlating
15 timecode of the audio file generated by the receiver/recorders. Thereafter, the retrieved audio may optionally be re-stamped with the timecode of the receiver/recorder and inserted in its proper place within the receiver/recorder audio file. In this manner, audio may be wirelessly recorded with zero data loss.

Referring now to FIG. 4A, illustrated is a flow diagram of one embodiment of a
20 process for operation of a recording system such as recording system **100** in synchronous timecode generator mode in accordance with one embodiment of the present invention. Process **400** begins at **402**. For example, at **402**, one or more performers may each don a local audio device, such as local audio device **102** as described with respect to FIGS. 1, 3A,

and 3B. Also, a sound engineer or other personnel may be equipped with a control unit such as RCU **104**. Process **402** then proceeds to **404**.

At **404**, initialization occurs. During initialization, the local control unit such as local control unit **310** or other form of central processing unit is reset. Thereafter, the local transmitter, local receiver, ADC, DAC, and local timecode generator clock are initialized. The process then optionally proceeds to **406**, at which the sampling rate of the ADC is set. Alternatively, the sampling rate may be set via hardware or via software executed as part of a separate algorithm. In some embodiments of the present invention, a sample rate of 48 kHz is incorporated.

Next, at **408**, wireless receive channels are established between the local audio device and one or more wireless devices such as RCUs (e.g., RCU **104**), receivers, and audio recorders. To establish the channel, the local receiver of the audio device receives one or more data packets from the remote wireless device and stores the packets in a designated buffer. For example, when establishing wireless communication with a RCU, the local audio device may receive one or more data packets containing information such as a master timecodes, transport status (i.e., transport mode of an audio recorder), and the like. These packet(s) are then stored in an RX buffer (i.e., a reserved segment of memory used to hold data while it is being processed). Process **400** then proceeds to **410**.

At **410**, the local control unit reads the master timecode contained in the RX buffer and jam synchronizes the local timecode generator with the master timecode. The jam sync synchronizes the local audio device with the RCU while allowing the local audio device to supply its own timecode. Local supply of synchronized timecodes ensures proper timing during periods in which the master timecodes cannot be read (e.g., the RCU is temporarily

unstable, wireless communication dropouts, etc.).

Next, at **412**, process **400** queries the transport status stored in the RX buffer. If at **412**, the transport status is stop, process **400** returns to **410**. However, if at **412**, the transport status is record, process **400** proceeds to **414**. At **414**, a new audio file is created in memory (e.g., on a flash card) and the newly created file is timestamped. In one aspect of the present invention, timestamping includes storing the timecode in the file header. Process **400** then proceeds to **416**.

At **416**, the local control unit waits for an audio sample interrupt from the ADC. Once an audio sample interrupt occurs, process **400** proceeds to **418**. At **418**, the audio sample is retrieved from the ADC and stored in the local memory. In one aspect of the present invention, the audio sample is stored in the next available address of the local memory. Next, at **420**, the timecode generator counter is incremented, thereby indicating that the time period for one sample of audio has elapsed.

Process **400** then proceeds to **422**, at which the local control unit transmits the audio sample through the local transmitter to the other wireless devices such as RCUs, receivers, audio recorders, and the like. For example, audio from multiple local audio devices may be transmitted to a multi-track recorder for recording of the audio event while each local audio device locally records its performer's audio. At **424**, process **400** queries the RF buffer of the local receiver to determine the availability of a new master timecode packet. If at **424**, a new master timecode packet has not been received from the RF receiver, process **400** returns to **416**. However, if at **424**, a new master timecode packet has been received, process **400** proceeds to **426** as depicted in FIG. 4B.

At **426**, process **400** executes a feedback loop algorithm, which modifies the speed of

the local timecode generator as necessary to maintain its synchronization with the master timecode generator (e.g., a timecode generator contained within the RCU or master recorder). This algorithm may be implemented using any one of a variety of methods. In one embodiment of the present invention, a feedback loop algorithm, such as process 500 depicted in FIG. 5, modulates a low-pass filtered feedback error voltage that is supplied by the local control unit directly to the local oscillator. The local oscillator then controls the sample rate of the ADC and the speed of the local timecode generator by supplying the feedback error voltage to the ADC's sample rate input and the local timecode generator's clock control input. Alternatively, a comparator independent of the local control unit may perform the comparison of the master timecodes and the local timecodes and may vary the sample rate of the ADC and the speed of the local timecode generator by directly supplying the feedback error voltage to the oscillator. A variety of hardware and software equivalents of this function may be substituted without departing from the scope of the present invention.

Referring now to FIG. 5, the feedback loop algorithm begins at 502. At 504, the current local timecode is retrieved from the timecode generator such as local timecode generator 304 and is written to the variable TCgen. Process 500 proceeds to 506. At 506, the current master timecode is retrieved from the RX buffer of the local receiver and is written to the variable TCrx and process 500 proceeds to 508. At 508, variable TCdiff is calculated by subtracting TCrx from TCgen. Process 500 then proceeds to 510, at which process 500 compares TCdiff to zero. If, at 510, TCdiff is less than zero, process 500 proceeds to 512, at which the feedback error voltage supplied to the local oscillator's DAC by the local control unit is increased above the previously supplied feedback error voltage. The local oscillator's DAC then supplies the new feedback error voltage to the local

oscillator, which, in turn, supplies a new clock input voltage to the local timecode generator and a new sample rate input to the ADC. In this manner, the speed of the local timecode generator and the sample rate of the ADC are increased to maintain synchronization with the master timecode generator. However, alternate embodiments of the present invention are envisioned in which only one of either the speed of the local timecode generator or the sample rate of the ADC is modified.

Alternatively, if at **510** TCdiff is not less than zero, process **500** proceeds to **514**, at which TCdiff is analyzed to determine if it is greater than zero. If yes, process **500** proceeds to **516** and the feedback error voltage supplied to the local oscillator's DAC by the local control unit is decreased below the previously supplied feedback error voltage. The local oscillator's DAC then supplies the new feedback error voltage to the local oscillator, which, in turn, supplies a new clock input voltage to the local timecode generator and a new sample rate input to the ADC. In this manner, the speed of the local timecode generator and the sample rate of the ADC are decreased to maintain synchronization with the master timecode generator. However, alternate embodiments of the present invention are envisioned in which only one of either the speed of the local timecode generator or the sample rate of the ADC is modified. Furthermore, alternate embodiments are envisioned in which an inverse relationship occurs (e.g., DAC voltage is increased when TCdiff is greater than zero and it is decreased when TCdiff is less than zero).

If TCdiff is neither less than zero as determined at **510** or greater than zero as determined at **514**, then TCdiff is equal to zero. In this scenario, the local and master timecode generators are synchronized and, therefore, no adjustment is made to the speed of the local timecode generator. At this point, process **500** ends at **518**.

Although FIG. 5 depicts one method of performing a feedback loop, many variations of this feedback loop may be substituted without departing from the scope of the present invention. For example, the feedback loop may be implemented as a digital phased locked loop that re-samples the audio in a manner that simulates a hardwired feedback loop. Also, the feedback loop may include a low pass filter.

Referring back to FIG. 4B, after execution of the feedback loop algorithm at **426**, process **400** proceeds to **428**.⁹ At **428**, the local timecode generator is jam synchronized with the newly received master timecode read from the RX buffer. Next, process **400** optionally proceeds to **430**, at which a timecode is stored as an escape sequence in the next available address of the local memory. The escape sequence stores a master timecode in addition to the locally generated timestamp. This escape sequence may be used post-processing to resample the audio based upon interpolated master timecode data. Process **400** then proceeds to **432**. At **432**, process **400** queries the continuous loop record mode. If at **432** the continuous loop record mode is enabled, process **400** returns to **416** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **432**, the continuous loop record mode has not been enabled, process **400** proceeds to **434**. At **434**, process **400** queries the transport status. If at **434** the transport status is record, process **400** returns to **416** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **434**, the transport status is stop, process **400** returns to **410**, at which process **400** continuously jam synchronizes the local timecode generator with the master timecodes received in the RX buffer until the transport status changes from stop to record at **412**.

Turning next to FIG. 6, illustrated is a flow diagram of one embodiment of a process for recording audio and for replaying and re-recording segments of missed audio in

accordance with embodiments of the present invention. Process **600** begins at **602**. For example, at **602**, one or more performers may each don a local audio device, such as local audio device **102** as described with respect to FIG. 2A. Process **600** then proceeds to **604**.

At **604**, a master unit, such as RCU **104**, receiver **106**, or recorder **108** transmits
5 master timecodes to each local audio device, and process **600** proceeds to **606**. At **606**, each local audio device synchronizes (e.g., jam syncs) its respective on board local timecode generator with the master timecodes received from the master unit, thereby synchronizing all local audio device timecode generators with the master timecode generator contained within the master unit. Process **600** then proceeds to **608**. At **608**,
10 local audio devices begin locally recording audio received from an audio input device. This audio is stored in the memory of the respective local audio device with timestamps generated by the local timecode generator. Each local audio device also simultaneously transmits its received audio to recorders or receiver/recorder combinations such as receivers **106** and recorders **108** in real time. The audio received from each of the local
15 audio devices (e.g., the local audio device of each performer) may be combined to create one or more multi-track audio files that are stored with master timestamps generated by the receiver/recorder's internal master timecode generator.

Process **600** then proceeds to **610**. At **610**, process **600** queries the initiation of audio replay. The initiation of audio replay may be manual or automatic. For example, if a
20 user detects a loss of audio, the user may manually initiate audio replay beginning at the specific timecode reference at which the transmission error occurred. Alternatively, if a loss of audio is automatically detected by the receiving equipment, a playback request may be sent from the receiving equipment to the controlling unit such as a remote control unit. In

response, such controlling unit may command the local audio devices to replay or retransmit the missed audio to the receiving equipment beginning at the timecode at which the loss of data occurred or at a conveniently close time thereto (e.g., zero to ten seconds prior to the loss of data).

5 If, at **610**, audio replay is not initiated either manually or automatically, process **600** returns to **608**. However, if, at **610**, audio replay is initiated, process **600** proceeds to **612**. At **612**, a controlling unit, such as RCU **104**, sends a signal to the local audio devices requesting playback of the stored audio starting at a specific timecode.

10 Next, at **614**, each local audio device processes the playback command and synchronizes playback to the timecode contained in the playback command. In addition, at least one local audio device transmits the synchronization data to the receiving equipment (e.g., receiver **106**, recorder **108**, etc.) to synchronize recording of the replayed audio. Process **600** then proceeds to **616**. However, in alternate embodiments of the present invention, the receiving equipment and the local audio devices may simultaneously receive
15 the synchronization and time reference data from the transmitting equipment (e.g., the controlling unit).

 At **616**, one or more local audio devices transmit, or replay, its respective stored audio starting with the audio that corresponds to the time specified by the timecode. The receiving equipment simultaneously records the replayed audio from each of the local audio
20 devices and stores it within the previously recorded audio according to its timecode data. That is, due to the highly accurate synchronization of all of the components of the recording system, the receiving equipment may insert the replayed audio data that was not recorded during the audio event due to wireless transmission errors into the original recording at the

nearly the exact time at which the missed audio originally occurred, thereby compensating for any transmission losses. Process **600** then proceeds to **618**. At **618**, one or more local audio devices continue to replay audio while the receiving equipment records the audio.

At **620**, process **600** queries the status of audio replay. If, at **620**, the audio has been
5 fully replayed, process **600** proceeds to **608**. At **608**, the local audio devices may record a new audio event or may replay a different segment of recorded data. Otherwise, if, at **620**, all requested audio has not been replayed or re-recorded, process **600** returns to **618**.

Referring now to FIG. 7, illustrated is a flow diagram of one embodiment of a process for operation of a recording system such as recording system **100** in asynchronous
10 timecode generator mode in accordance with one embodiment of the present invention. Process **700** begins at **702**. For example, at **702**, one or more performers may each don a local audio device, such as local audio device **102** as described with respect to FIGS. 1, 3A, and 3B. Also, a sound engineer or other personnel may be equipped with a control unit such as RCU **104**. Process **702** then proceeds to **704**.

15 At **704**, initialization occurs. During initialization, the local control unit such as local control unit **310** or other form of central processing unit is reset. Thereafter, the local transmitter, local receiver, ADC, DAC, and clock are initialized. The process then proceeds to **706**, at which the sampling rate of the ADC is set. In some embodiments of the present invention, a sample rate of 48 kHz is incorporated.

20 Next, at **708**, wireless receive channels are established between the local audio device and one or more wireless devices such as RCUs (e.g., RCU **104**), receivers, and audio recorders. To establish the channel, the local receiver of the audio device receives one or more data packets from the remote wireless device and stores the packets in a

designated buffer. For example, when establishing wireless communication with a RCU, the local audio device may receive one or more data packets containing information such as a timecode, transport status (i.e., transport mode of an audio recorder), and the like. These packet(s) are then stored in an RX buffer. Process **700** then proceeds to **710**.

5 At **710**, the local control unit reads the transport status and the master timecode contained in the RX buffer. Next, at **712**, process **700** queries the transport status. If at **712**, the transport status is stop, process **700** returns to **710**. However, if at **712**, the transport status is record, process **700** proceeds to **714**. At **714**, a new audio file is created in memory (e.g., on a flash card) and the timecode is stored in the header of the newly
10 created file. Process **700** then proceeds to **716**.

At **716**, the local control unit waits for an audio sample interrupt from the ADC. Once an audio sample interrupt occurs, process **700** proceeds to **718**. At **718**, the audio sample is retrieved from the ADC and stored in the local memory. In one aspect of the present invention, the audio sample is stored in the next available address of the local memory.
15 Process **700** then proceeds to **720**, at which the local control unit transmits the audio sample through the local transmitter to the other wireless devices such as receivers, audio recorders, and the like.

At **722**, process **700** queries the RF buffer of the local receiver to determine the availability of a new master timecode packet. If at **722**, a new master timecode packet has
20 not been received from the RF receiver, process **700** returns to **716**. However, if at **722**, a new master timecode packet has been received, process **700** optionally proceeds to **724**. At **724**, the timecode is stored as an escape sequence in the next available address of the local memory. Process **700** then proceeds to **726**. At **726**, process **700** queries the

continuous loop record mode. If at **726** the continuous loop record mode is enabled, process **700** returns to **716** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **726**, the continuous loop record mode has not been enabled, process **700** proceeds to **728**. At **728**, process **700** queries the transport status. If at **728** the transport status is record, process **700** returns to **716** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **728**, the transport status is stop, process **700** returns to **710**, at which process **700** continuously reads the transport status and master timecodes from the RX buffer until the transport status changes from stop to record at **712**.

Operation of the present invention in asynchronous mode allows one or more components of local audio devices such as local audio devices **102** (e.g., local timecode generator, comparator, counter, etc.) to be eliminated in embodiments in which the local audio devices utilize master timecodes generated by the master timecode generator rather than locally generated timecodes.

Referring next to FIG. 8, depicted is multi-memory unit **800** for reading and/or reformatting audio files recorded on a plurality of local audio device memories (e.g., memories **332**). In its simplest form, such as the embodiment depicted in FIG. 8, multi-memory unit **800** includes a plurality of individual memory ports **802a – 802f** (e.g., flash memory card drives, compact flash memory card drives, USB thumbdisk ports, etc.). Also optionally included is a plurality of memory status displays **804a – 804f** to indicate to a user which memory ports **802** are in use. Similarly, power status display **806** and external connection status display **808** may be optionally included to indicate the presence of power and an external connection (e.g., a personal computer), respectively. Multi-memory unit **800** may be equipped with an integral user interface or may be connected to an external

interface (e.g., a personal computer) to allow the audio files contained on each memory to be manipulated and/or read.

In one aspect of the present invention, the memory of each local audio device such as local audio device **102** may be removed after completion of a performance, videotaping, etc. Each memory may then be inserted into a corresponding one of memory ports **802**.
5 Thereafter, all of the individual audio files may be combined to provide one or more comprehensive audio files. Or, alternatively, each audio file may be individually reformatted or otherwise manipulated prior to creation of one or more comprehensive audio files.

In embodiments of the present invention in which the recording system recorded the
10 audio event in asynchronous mode, or in which long periods (e.g., 8 hours) of recording occurred, multi-memory unit **800** may be used to resample the audio samples to ensure that each audio file's timestamps are properly synchronized. One example of such a process is illustrated in the flowchart of FIG. 9.

Referring now to FIG. 9, illustrated is a flow diagram of one embodiment of a process
15 for interpolating timestamps for unstamped audio samples (i.e., audio samples that are not associated with a master timecode timestamp) based upon the timestamps of stamped audio samples (i.e., audio samples that are associated with a master timecode timestamp), and resampling the audio samples to include the interpolated timestamps in accordance with embodiments of the present invention. After recording of an audio event, the audio
20 data stored in the memory of the local audio device (e.g., memory **332**) will typically be stored as an audio sample stream wherein approximately one out of every one thousand to one hundred thousand samples includes a timestamp generated by a remote master timecode generator. However, the interval between timestamped audio samples may be

greater than the aforementioned interval if the wireless timecode link was less reliable than a standard wireless link.

The resampling process depicted in FIG. 9, and equivalents thereof, analyze the occurrence of the relatively sparse timestamped audio samples to generate a linear interpolation or a best fit curve. This curve is then used to interpolate timestamps for the unstamped audio samples. After the timestamp of each audio sample has been interpolated, the audio samples may then be re-sampled such that the audio samples are now synchronized with samples generated by the master timecode generator. In one aspect of the present invention, the audio samples are resampled based upon the calculated curve to simulate the condition of an ADC whose sample rate input was driven directly by the master timecode generator's source.

If all of the audio from all local audio devices is resampled in this manner, each resulting resampled audio file appears as if it was originally sampled with an accurate audio sample clock derived from the master timecode source. This resampling allows each audio file to include a single timestamp that marks the master timecode of the first audio sample of the audio file. Furthermore, since the audio files now appear as if they have been sampled by an extremely accurate audio sample clock, each audio sample's timestamp may be accurately calculated based solely on the audio sample rate and the timestamp of the first audio sample of the audio file. This condition allows the audio files to be formatted and/or stored as a standard timecoded broadcast .WAV file, thereby allowing them to be read, edited, etc. using standard, commercially-available editing systems. That is, the files may be processed in the same manner as if the audio file had been generated by a standard

multi-track audio recorder. Such condition allows the present invention to be easily integrated with other industry standard recording equipment.

One such resampling process is illustrated in FIG. 9. Process **900** begins at **902**. For example, at **902**, one or more local audio device memories may be removed from its
5 respective local audio device and may be inserted into a multi-memory unit **800**, or an equivalent thereof. Process **902** then proceeds to **904**.

At **904**, process **900** determines the desired starting and ending timecodes and stores this data in the variables TimeCodeStart and TimeCodeEnd, respectively. The desired starting and ending timecodes may be input by a user or may be suggested or
10 automatically determined by the algorithm. Process **900** then proceeds to **906**. At **906**, a variable, i, is initialized to a value of zero. The variable i corresponds to the position of audio samples or data points in a data array represented by the variable AudioSample[i]. Process **900** then proceeds to **908**.

At **908**, process **900** begins an iterative search for the audio file that matches the
15 desired starting timecode of the output file by comparing the value of TimeCodeStart with the value of the timecode of AudioSample[i]. If, at **908**, the value of TimeCodeStart is equal to the value of the AudioSample[i] timecode, process **900** proceeds to **912**. However, if at **908** the value of TimeCodeStart is not equal to the value of the AudioSample[i] timecode, process **900** proceeds to **910**. At **910**, the variable i is increased by a value of one thereby
20 allowing the value located in the next position of the audio sample array to be compared to the value of TimeCodeStart when process **900** returns to **908**.

If the value of TimeCodeStart is equal to the value of the AudioSample[i] timecode, process **900** proceeds to **912**. At **912**, a variable, n, is initialized to a value of one. The

variable n is added to the variable i to allow process **900** to continue to traverse the audio sample array while maintaining the location of the audio sample at the starting timecode, which is represented by the variable AudioSample[i]. Process **900** then proceeds to **914**. At **914**, the value of the AudioSample[i+n] timecode is compared to the value of TimeCodeEnd.

5 If at **914**, the value of the AudioSample[i+n] timecode is greater than or equal to the value of TimeCodeEnd, process **900** proceeds to **916**. At **916**, the value of the AudioSample[i+n] timecode is again compared to the value of TimeCodeEnd. If at **914**, the value of the AudioSample[i+n] timecode is greater than the value of TimeCodeEnd, process **900** proceeds to **928**, at which process **900** terminates. However, if at **916**, the value of the
10 AudioSample[i+n] timecode is equal to the value of TimeCodeEnd, process **900** proceeds to **922**.

Conversely, if at **914**, the value of the AudioSample[i+n] timecode is less than the value of TimeCodeEnd, process **900** proceeds to **918**. At **918**, the value of the AudioSample[i+n] timecode is compared to the value of CurrentTimeCodeEscapeSequence.

15 If, at **918**, the value of the AudioSample[i+n] timecode is not equal to the value of TimeCodeEscapeSequence, process **900** proceeds to **920** where the variable n is increased by one and process **900** returns to **914**. However, if at **918**, the value of the AudioSample[i+n] timecode is equal to the value of TimeCodeEscapeSequence, process **900** proceeds to **922**.

20 At **922**, the average time period "T" that elapsed between the audio samples that occurred between AudioSample[i] and AudioSample[i+n] may be calculated by subtracting the value of the timecode of AudioSample[i] from the value of the timecode of AudioSample[i+n] and dividing by n, wherein n is now equivalent to the number of audio

samples that occurred between the current timestamped audio sample and the previous timestamped audio sample. Process **900** then proceeds to **924**. At **924**, AudioSamples[i] through AudioSamples[i+n] are re-sampled at any desired sample rate based upon the value of T as calculated in **922**, or any other desired sample rate, using an audio resampling algorithm (e.g., linear interpolation). Process **900** then proceeds to **926**, at which the variable i is set to a value equal to the current value of i plus the current value of n and process **900** returns to **912**. The iterative process continues until the value of the AudioSample[i+n] timecode is greater than the value of TimeCodeEnd, whereby process **900** proceeds to **928**, at which process **900** terminates.

10 A similar interpolation algorithm, such as the algorithm depicted in FIG. 10, may be incorporated to break down single large audio files (e.g., an audio file recording the filming of multiple movie takes over a continuous eight hour period as a single eight-hour audio file) into smaller, more useful files (e.g., one audio file per take). These smaller files will allow the audio recorded locally by the local audio devices to be more easily matched or
15 synchronized with the individual audio files recorded by a master recorder such as recorder **108**.

In one use of an embodiment of the present invention, multiple local audio devices store audio samples with wirelessly-received timecode and transport status samples continuously for the entire duration of the work day (e.g., an 8 hour period). In a typical
20 scenario, while the local audio devices are recording continuously, a technician intermittently records segments of the eight-hour audio event. For example, in a film setting, each segment would typically represent a movie 'take' and might range from one to five minutes in duration. Consequently, the master recorder generates individual audio files (i.e., at least

one audio file for each recorded segment such as a movie take), whereas each local audio device generates one massive audio file. Therefore, there is a need for a method of segmenting each large local audio file into smaller audio files that correspond to the segments recorded by the master recorder.

5 The segmentation method (i.e., the method of segmenting the large local audio devices' files to match the multiple, smaller master recorder's audio file) requires knowledge of which portions of the single local audio device audio file are important and which portions can be discarded. This information can be inferred from the transport status of the master recorder since it is typically operated by someone with this
10 knowledge. Therefore, when the transport status of the master recorder changes from stop to record, it can be inferred that a new master recorder audio file begins, and, subsequently, when the transport status of the master recorder changes from record to stop, it can be inferred that the same master recorder audio file has ended. In addition, when the transport status of the master recorder remains in the stop mode, it can be
15 inferred that the audio recorded by the local audio device during this time period may be discarded. This audio may be discarded post-processing as per algorithms such as that depicted in FIG. 10 or during live recording.

 In embodiments of the present invention in which such data is discarded during live recording, the transport status and master timecode of the master recorder are
20 wirelessly transmitted to the local audio devices. This information may be processed by the local audio devices to allow them to create a new audio file with the current master timecode of the master recorder whenever the received transport status and master timecode indicate that the transport status has changed from stop to record. Similarly,

the local audio devices may end the newly created audio file when the received transport status indicates that it has changed from record to stop. In this scenario, the resulting local audio device files will automatically be segmented and will each be marked with a master timestamp at the beginning of each file.

5 However, in embodiments of the present invention in which unimportant audio is not discarded during live recording and, therefore, one or more large audio files are created, the large audio files may be segmented as per a process such as process **1000** as illustrated in FIG. 10. Process **1000** begins at **1002** at which one or more local audio devices have continuously recorded a lengthy quantity of audio data. Process **1000** then
10 proceeds to **1004**.

At **1004**, a copy of the audio file directory containing the segmented audio files that correspond to the same time period as the local audio device's single large audio file is obtained from the master recorder. Process **1000** then proceeds to **1006**. At **1006**, a variable *y* is initialized to a value of zero. The variable *y* corresponds to the number of each
15 file contained in the audio file directory copied from the master recorder. Process **1000** then proceeds to **1008**, at which the variable *y* is increased by one and a variable *x* is initialized to a value of one. The variable *x* corresponds to the position of each audio sample within a particular file. Process **1000** then proceeds to **1010**, at which the copied audio file directory is queried to determine if a file[*y*] (i.e., the file named with the number that corresponds to
20 the value of *y*) exists in the audio file directory. If no, process **1000** proceeds to **1028** and terminates.

If file[*y*] does exist, process **1000** proceeds to **1012**, at which process **1000** determines the starting and ending timecodes for file[*y*] and stores them in the variables

TimeCodeStart and TimeCodeEnd, respectively. Process **1000** then proceeds to **1014**, at which process **1000** compares the value of TimeCodeStart to the value of the timecode associated with AudioSample[x] stored in the memory of the local audio device. If at **1014** the value of TimeCodeStart is not equal to the value of the timecode associated with AudioSample[x], process **1000** proceeds to **1016**. At **1016**, the variable x is increased by one and process **1000** returns to **1014**. In this manner, TimeCodeStart is compared to each consecutive AudioSample[x] until the AudioSample timestamped with a value equal to TimeCodeStart is found. In some embodiments of the present invention, process **1000**, or an equivalent thereof, is performed after process **900**, or an equivalent thereof, to ensure that each of the audio samples has a timestamp (e.g., an interpolated timestamp).

When the AudioSample[x] having a timecode equivalent to TimeCodeStart is found at **1014**, process **1000** proceeds to **1018**. At **1018**, AudioSample[x] is extracted and process **1000** proceeds to **1020**, at which the variable x is increased by one and process **1000** proceeds to **1022**. At **1022**, process **1000** compares the value of TimeCodeEnd to the value of the timecode associated with AudioSample[x]. If at **1022**, the value of TimeCodeEnd is not equal to the value of the AudioSample[x] timecode, process **1000** returns to **1018**, whereupon audio samples are consecutively extracted until the timecode of the current AudioSample[x] equals TimeCodeEnd. If, at **1022**, the value of TimeCodeEnd is equal to the value of the timecode of AudioSample[x], process **1000** proceeds to **1024**, at which the final AudioSample[x] of the segmented audio file is extracted and the audio file is saved at **1026**.

Process **1000** then proceeds to **1008**, at which the variable y is increased by one and process **1000** proceeds to **1010** at which the audio file directory is queried to determine the

existence of file [y]. If file[y] exists, process **1000** proceeds to **1012** and it continues thereafter as described above. However, if at **1010**, it is determined that file[y] does not exist, process **1000** proceeds to **1028**, at which it terminates.

Although several processes have been disclosed herein as software, it is appreciated
5 by one of skill in the art that the same processes, functions, etc. may be performed via hardware or a combination of hardware and software. Similarly, although the present invention has been disclosed with respect to wireless systems, these concepts may be applied to hardwired systems and hybrid hardwired and wireless systems without departing from the scope of the present invention.

10 While the present invention has been described with reference to one or more embodiments, which embodiments have been set forth in considerable detail for the purposes of making a complete disclosure of the invention, such embodiments are merely exemplary and are not intended to be limiting or represent an exhaustive enumeration of all aspects of the invention. The scope of the invention, therefore, shall be defined solely by
15 the following claims. Further, it will be apparent to those of skill in the art that numerous changes may be made in such details without departing from the spirit and the principles of the invention.

CLAIMS

1. A system for wirelessly recording audio comprising:

at least one timecode generator for generating at least one timecode;

at least one local audio devices for receiving local audio from a wearer of

5 said local audio device and recording said local audio on a memory

internal to said local audio device;


wherein said local audio is recorded with timecode data that references at least a
portion of said recorded local audio data to at least one of said timecodes; and


wherein said local audio data from each of said local audio devices is combined to
10 create at least one comprehensive audio file based upon said timecode data via at least one
of the group consisting of audibly and electronically.

VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM

ABSTRACT

Disclosed are systems and methods for wirelessly recording multi-track audio files without the data corruption or loss of data that typically occurs with wireless data transmission. In some aspects of the present invention, each performer is equipped with a local audio device capable of locally recording the respective performer's audio while also transmitting it to a master recorder. The locally recorded audio may then be used to repair or replace any audio lost or corrupted during transmission to the master recorder. Such repair or replacement may be performed electronically or via playback of the locally recorded audio. In other aspects of the present invention, a master recorder is not required since all locally recorded audio may be combined or otherwise processed post-recording. A multi-memory unit is provided in another aspect of the present invention to facilitate manipulation and processing of audio files.

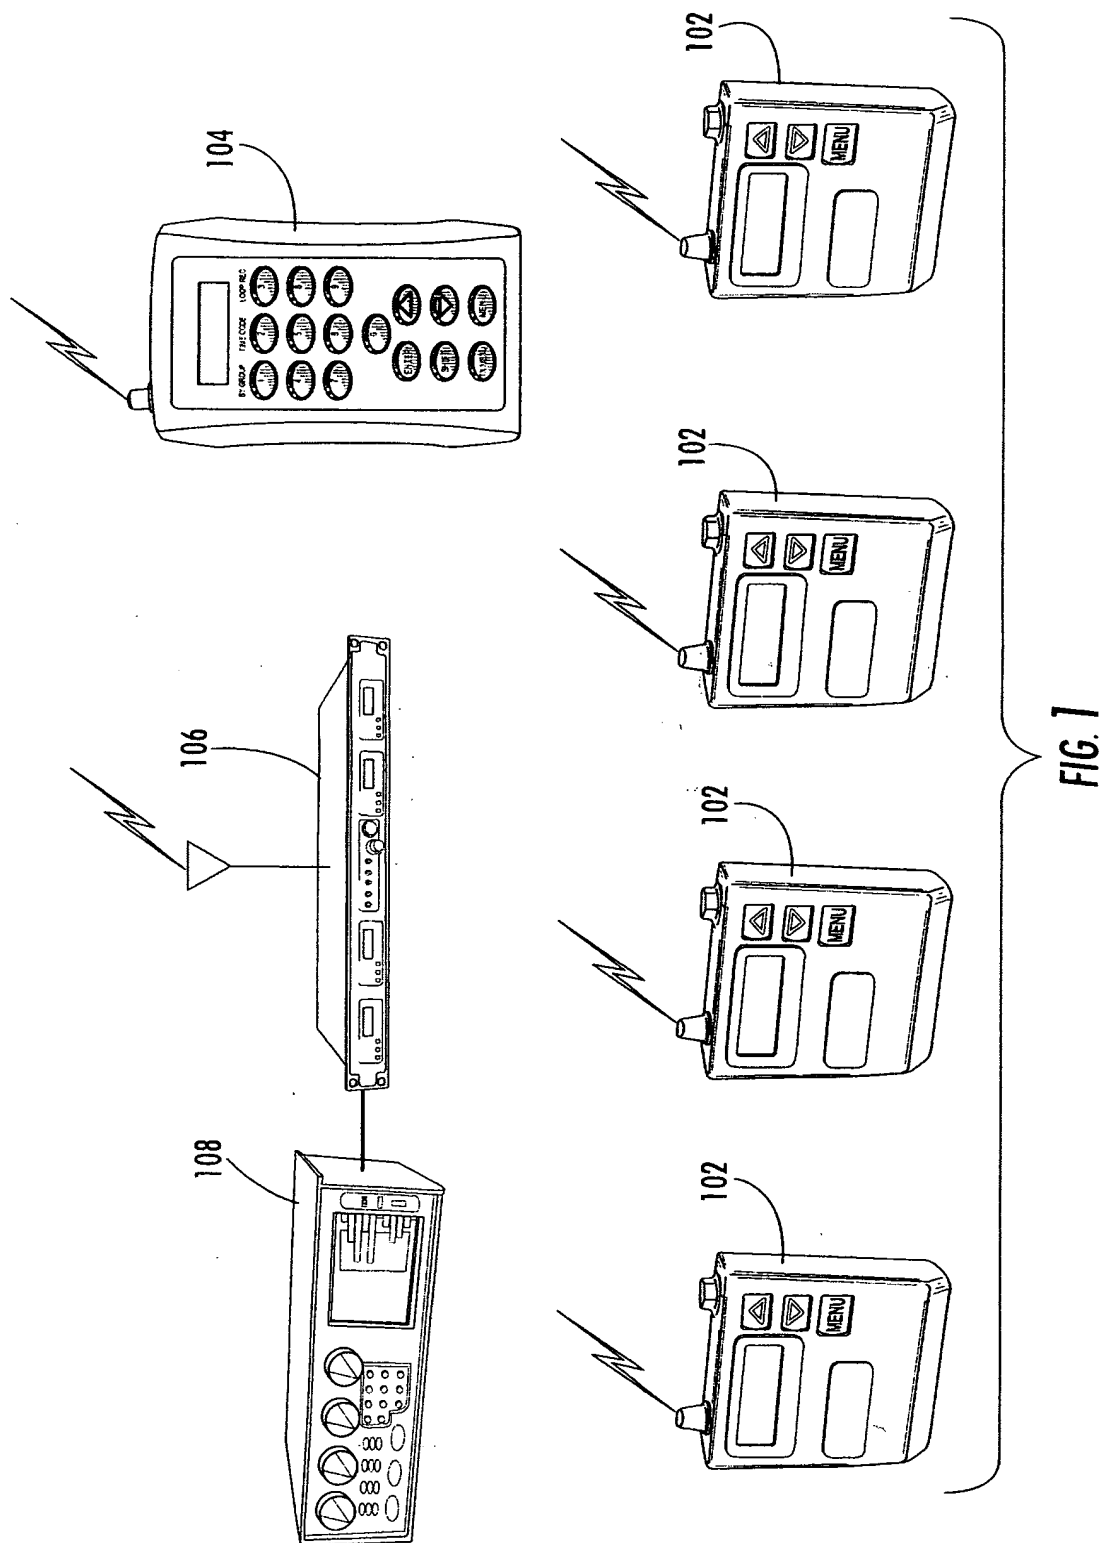

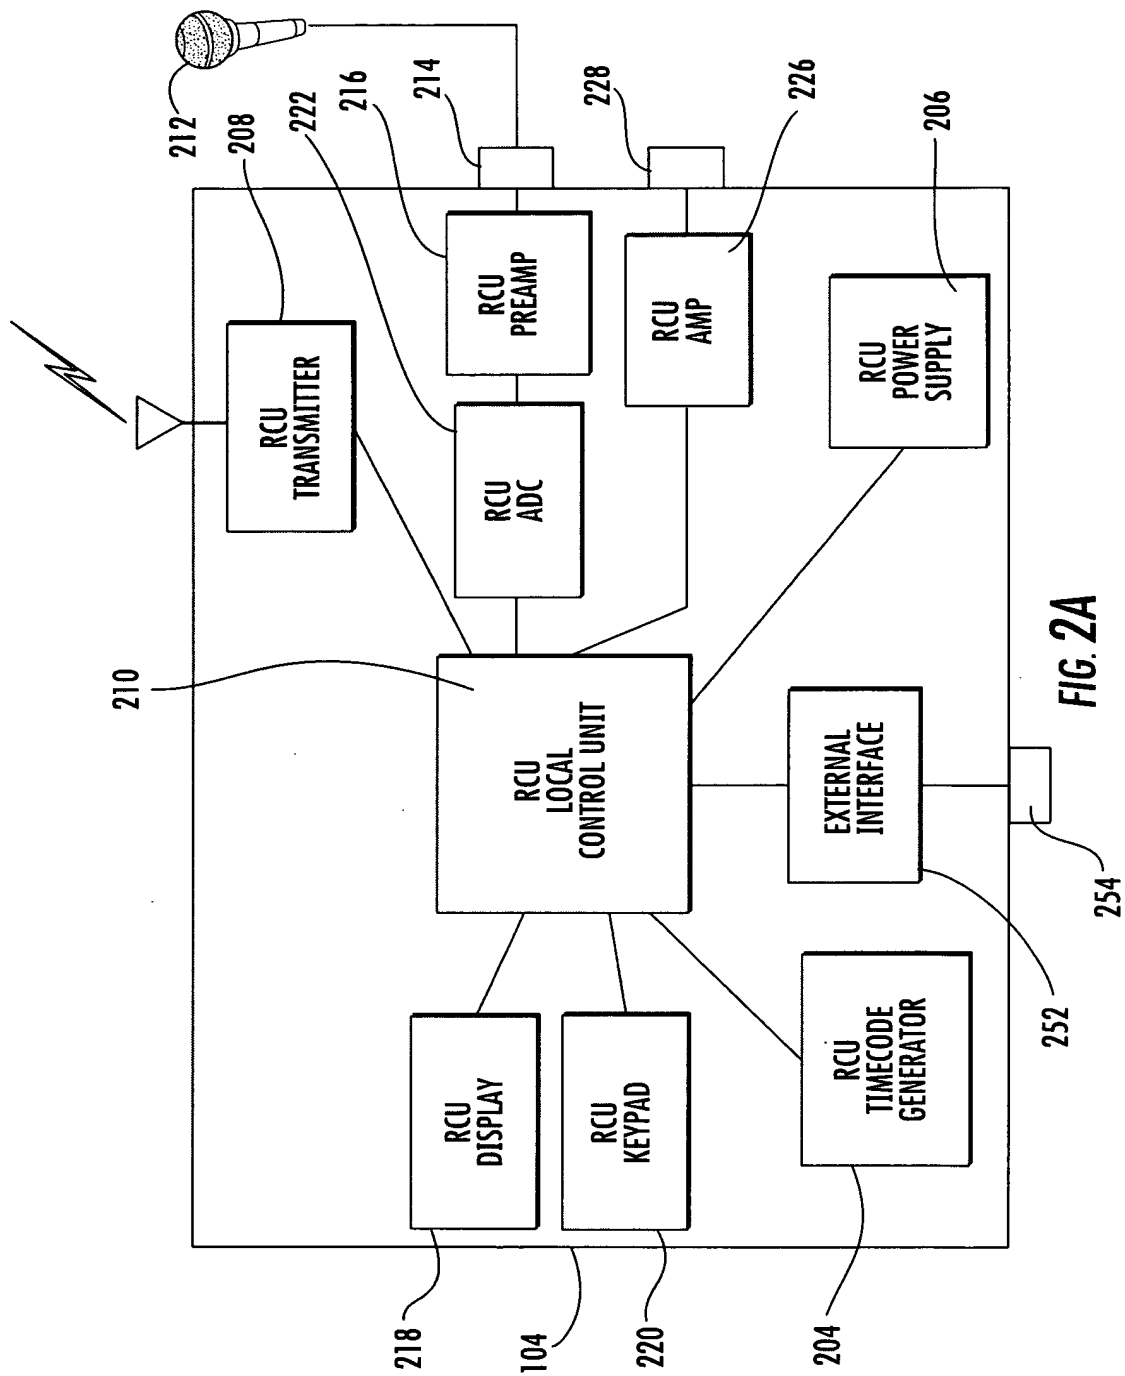

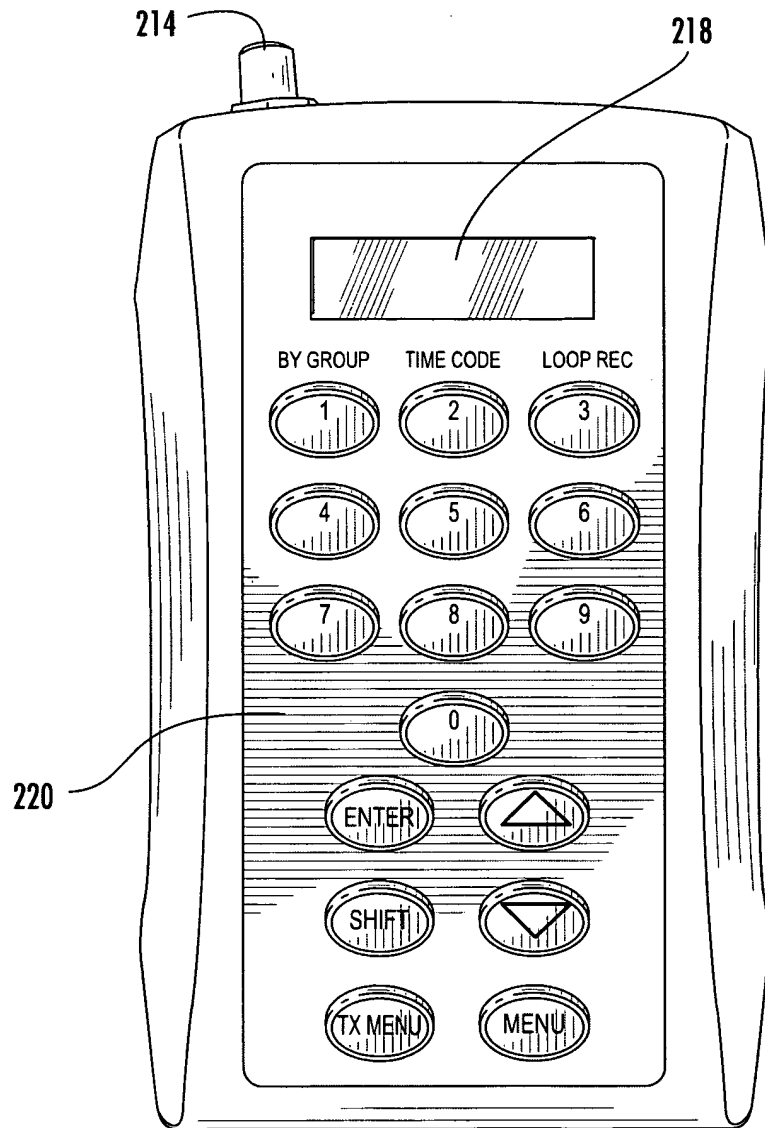


FIG. 2B

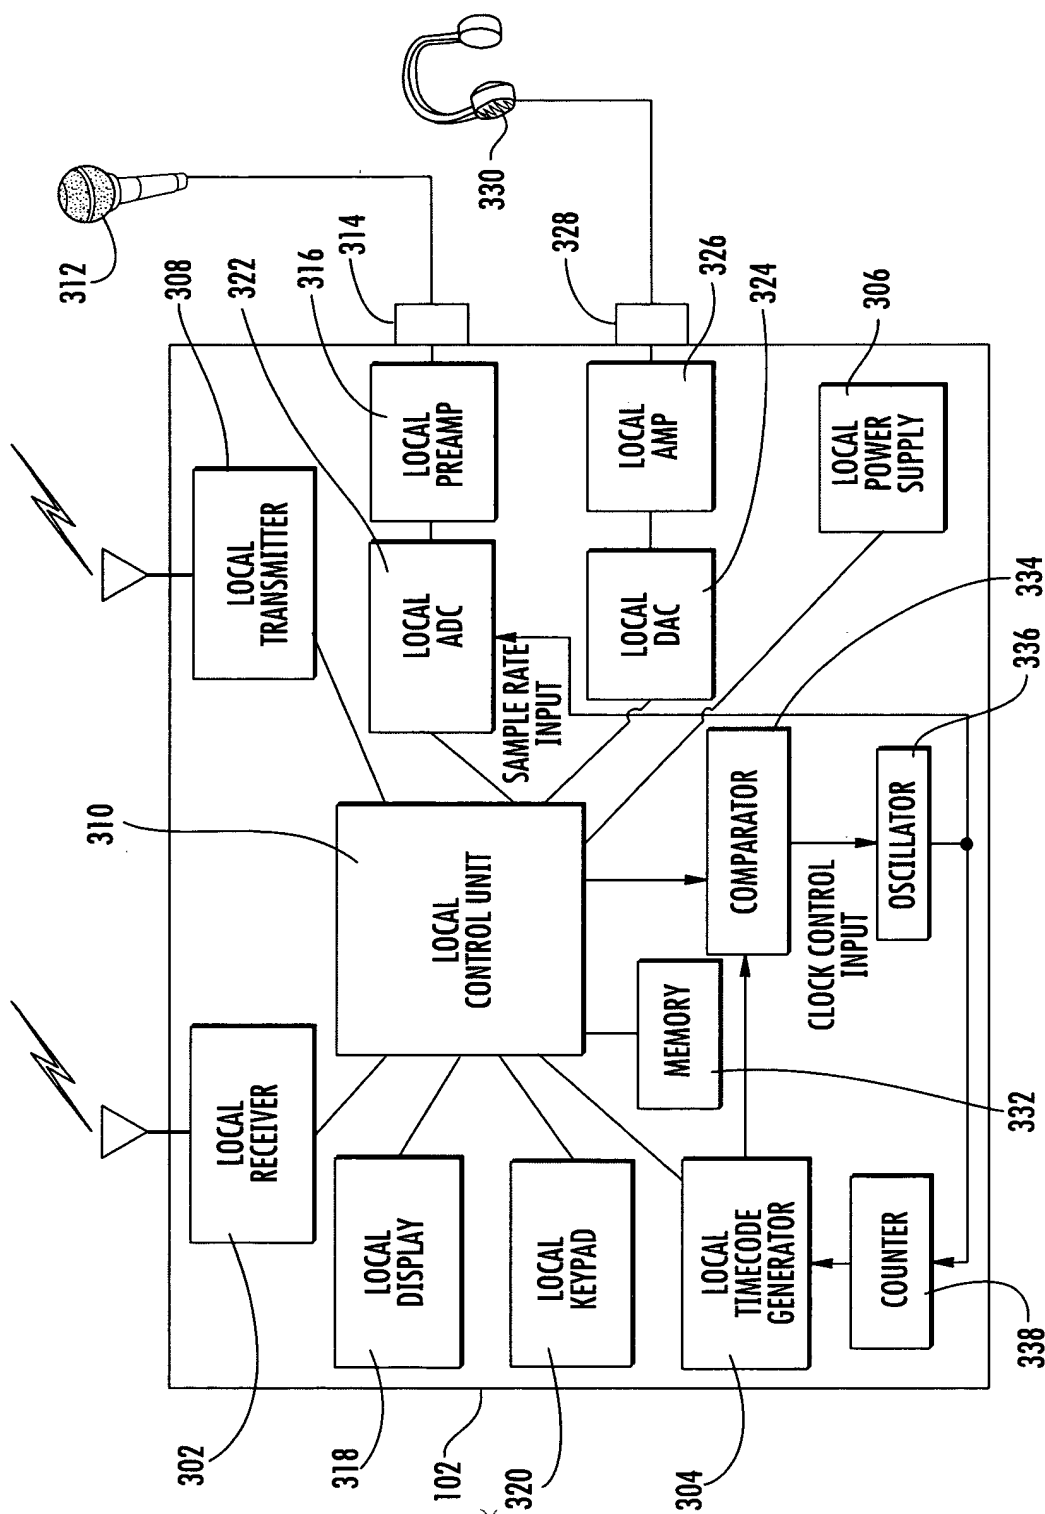


FIG. 3A

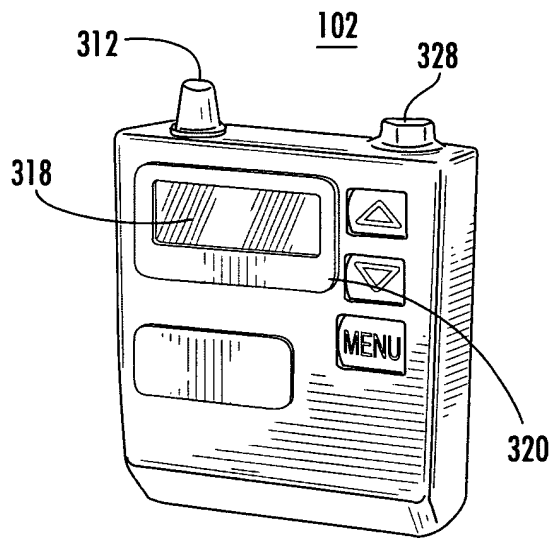


FIG. 3B

FIG. 4A

400

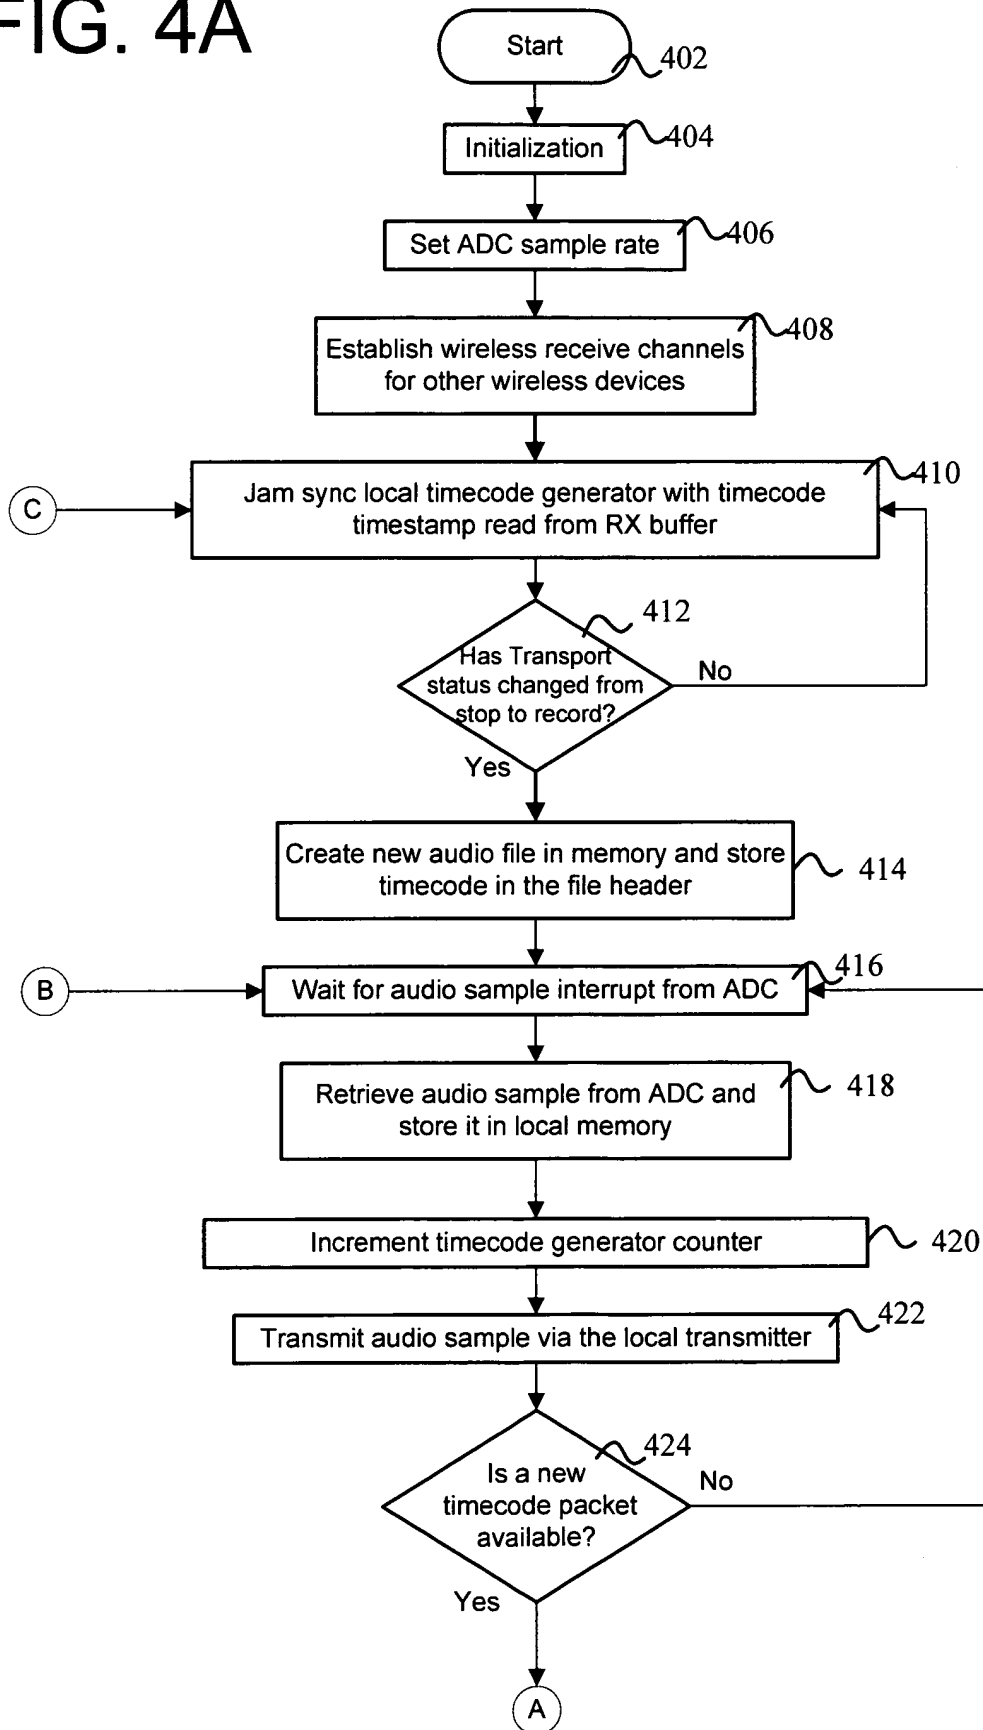


FIG. 4B

400

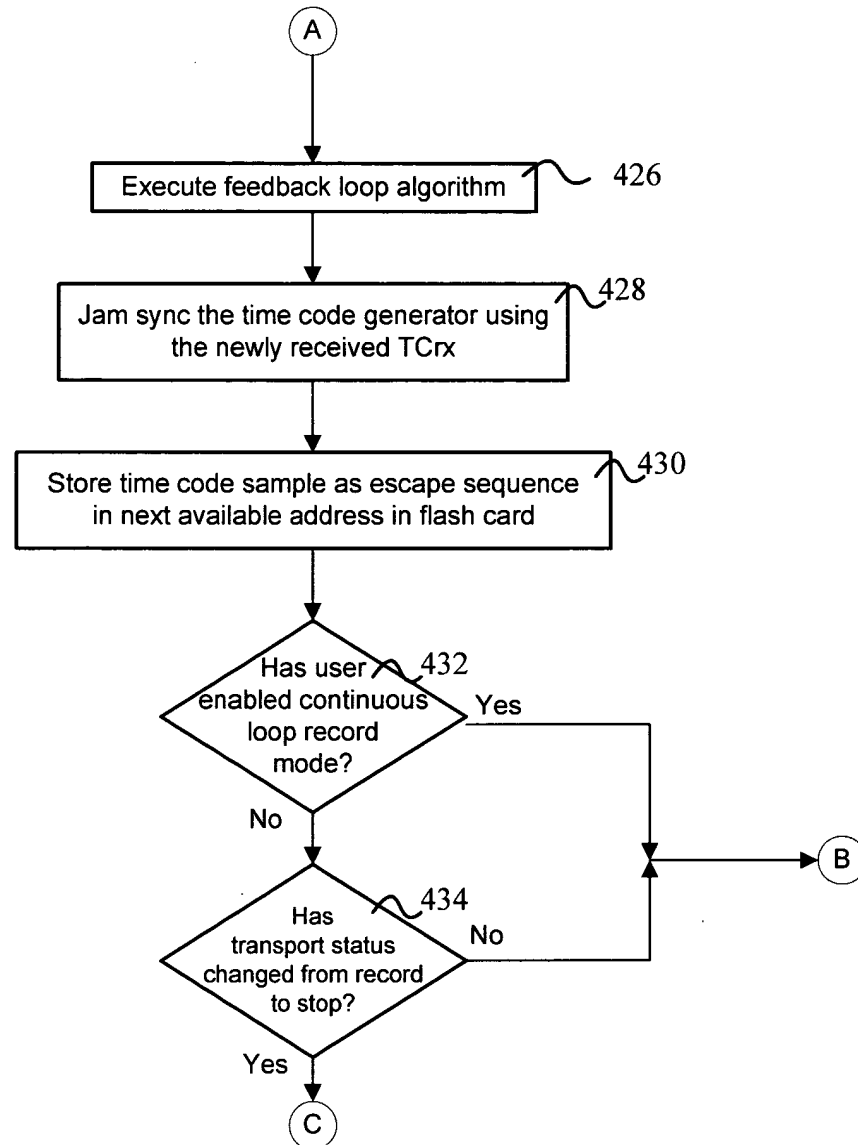


FIG. 5

500

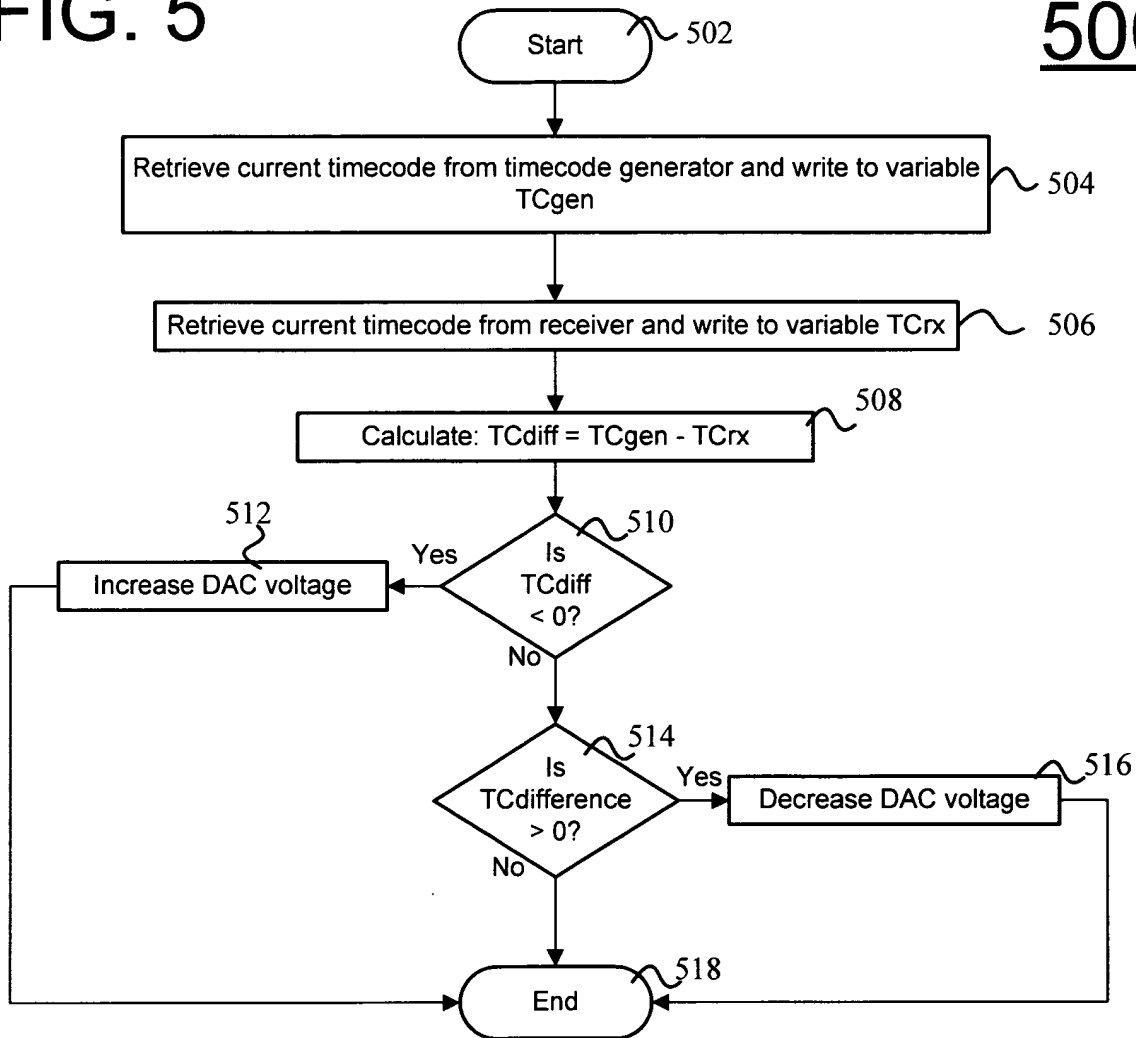


FIG. 6

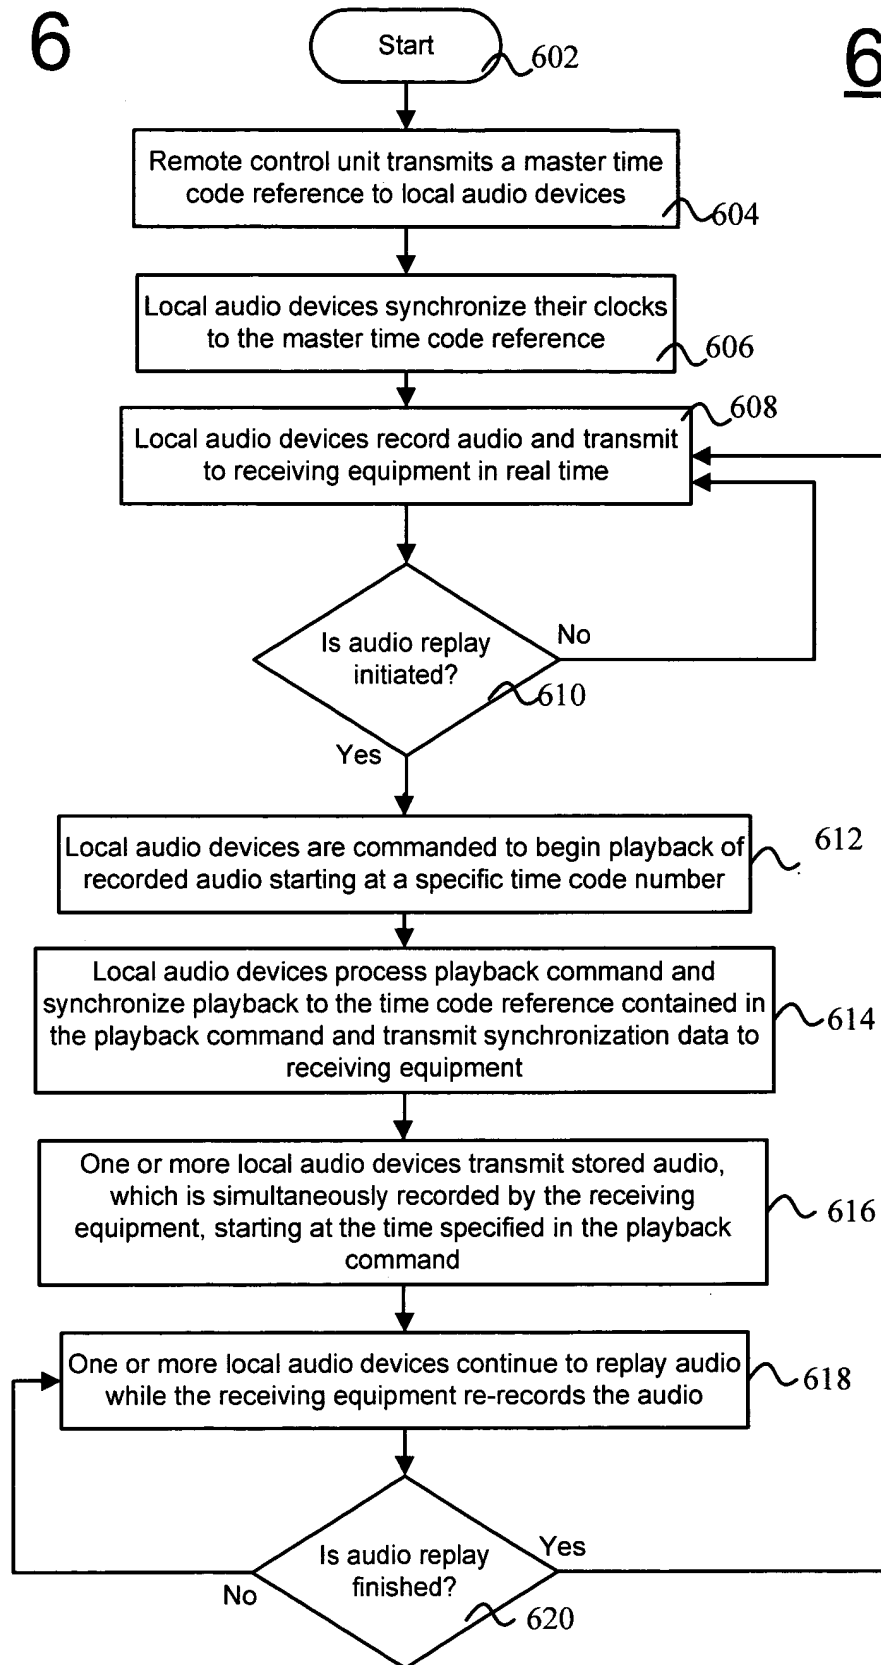
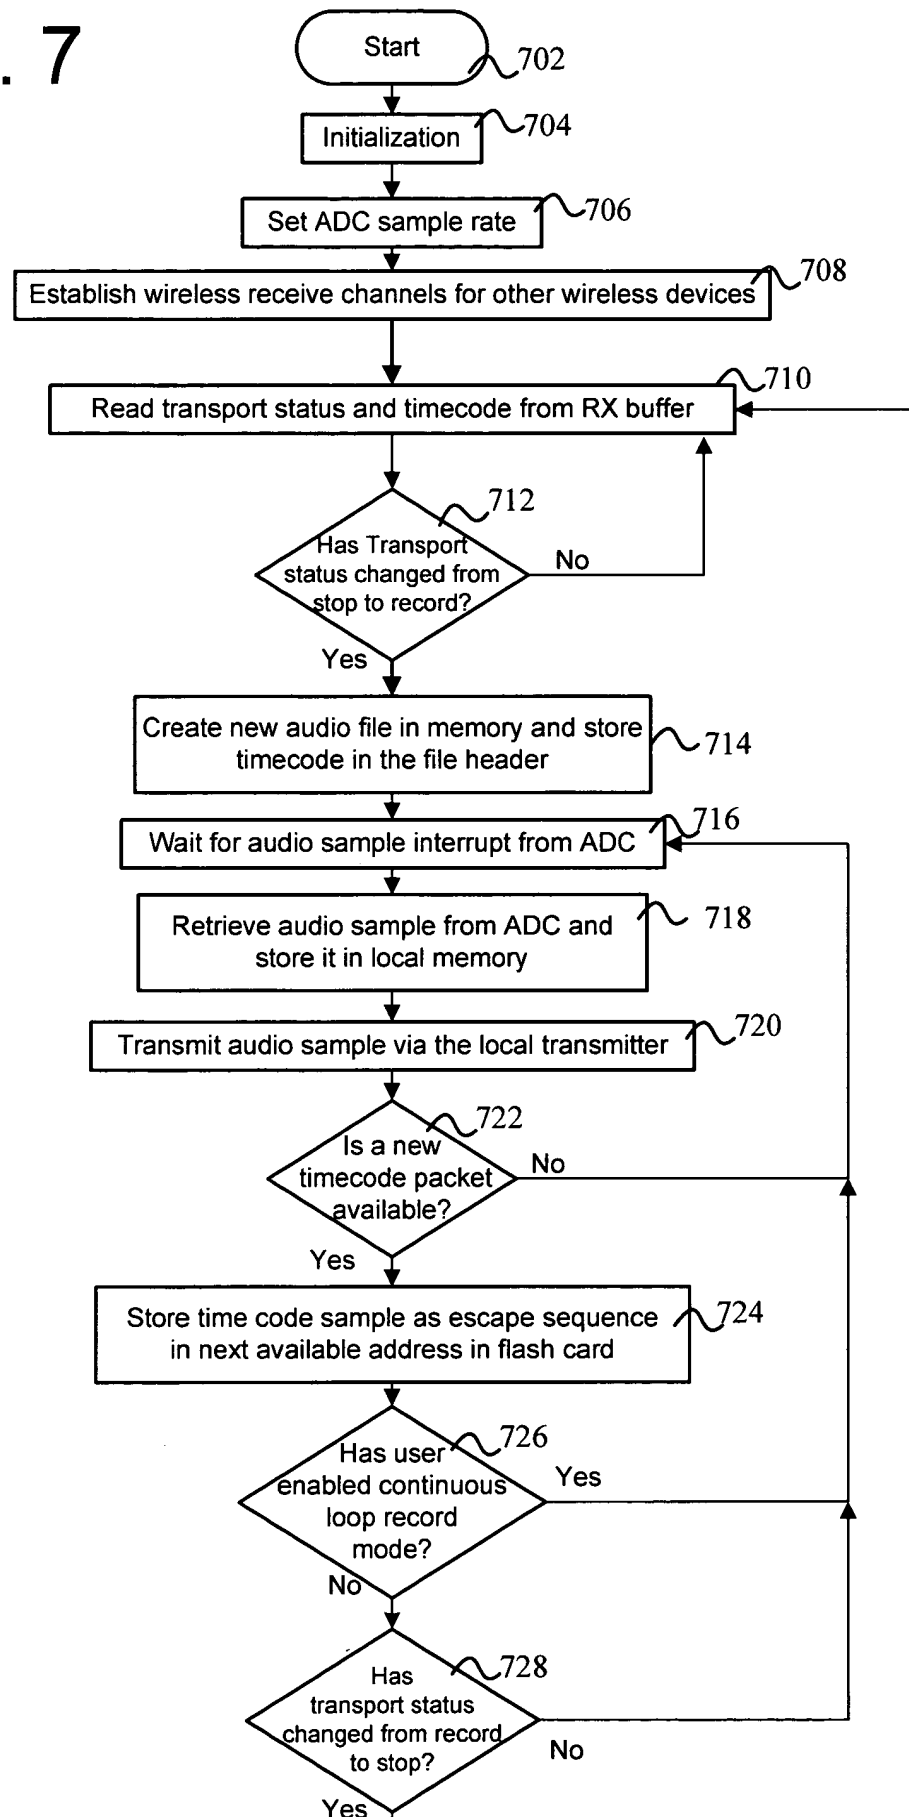


FIG. 7

700



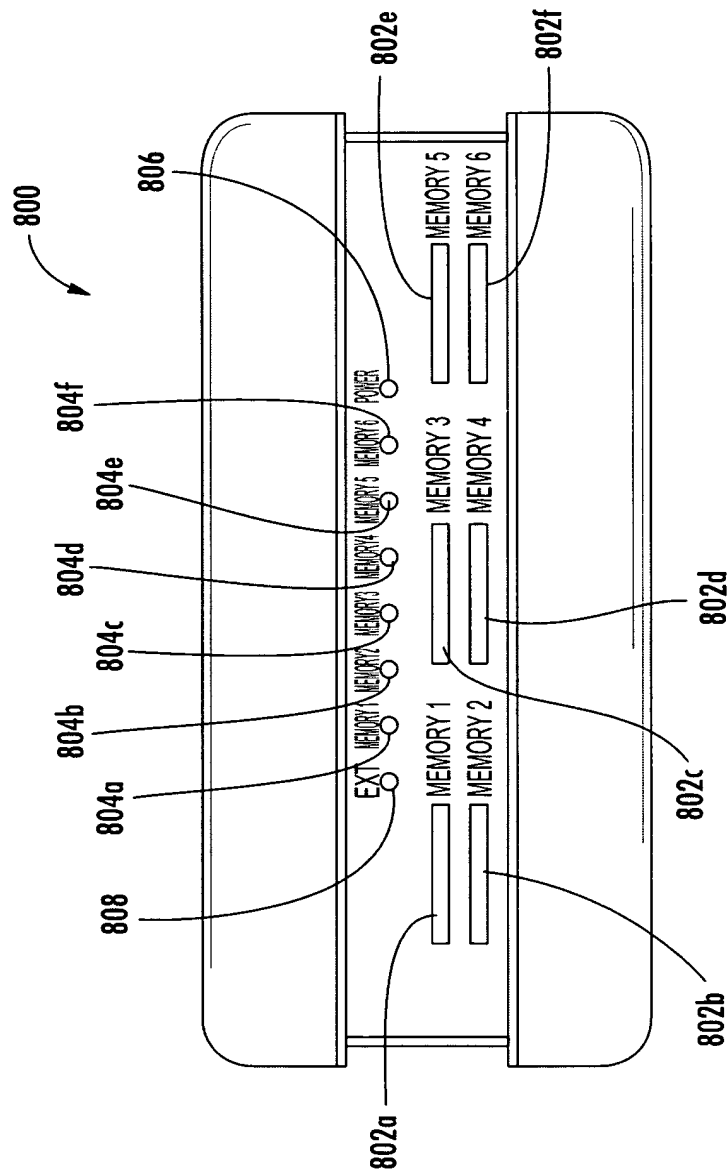


FIG. 8

FIG. 9

900


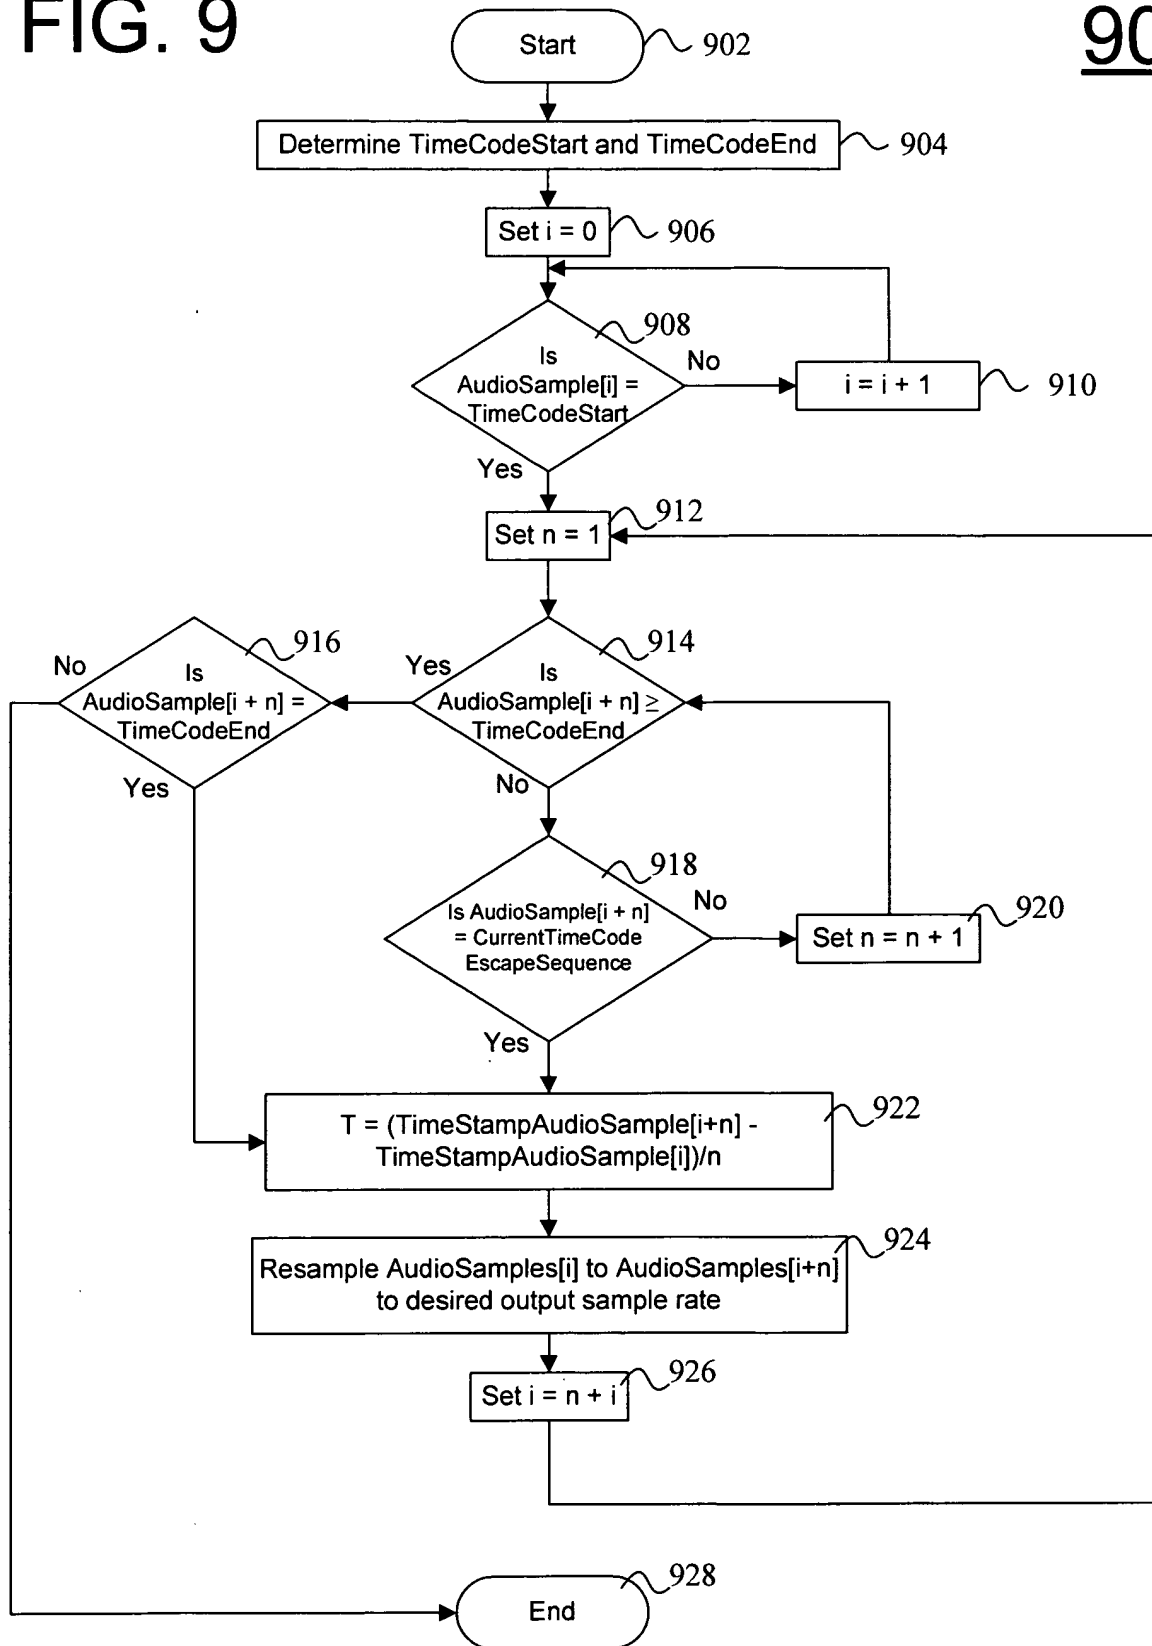


FIG. 10

1000

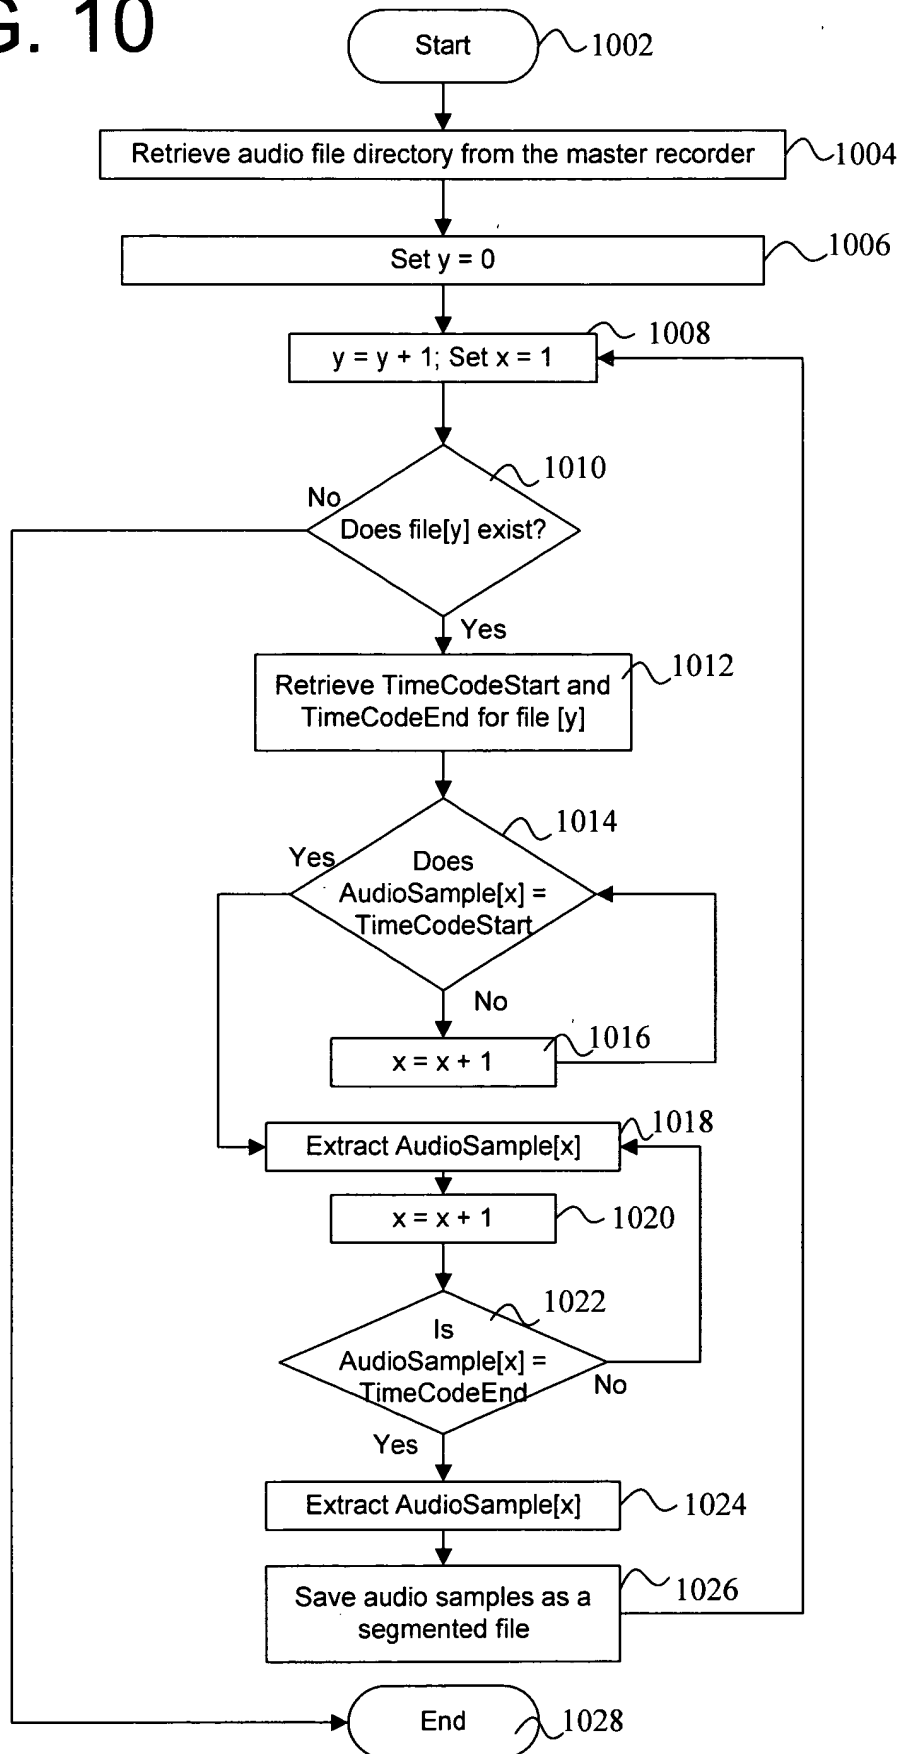

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☒ Declaration Submitted With Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	ZXC-001
First Named Inventor	GLENN NORMAN SANDERS
COMPLETE IF KNOWN	
Application Number	TBA
Filing Date	July 14, 2005
Art Unit	TBA
Examiner Name	TBA

I hereby declare that:

Each inventor's residence, mailing address, and citizenship are as stated below next to their name.

I believe the inventor(s) named below to be the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM

(Title of the Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) [] as United States Application Number or PCT International

Application Number [] and was amended on (MM/DD/YYYY) [] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.



[Page 1 of 2]

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 21 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to: ☒ The address associated with Customer Number:		00039689		OR ☐ Correspondence address below	
Name					
Address					
City		State		ZIP	
Country		Telephone		Fax	
<small>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</small>					
NAME OF SOLE OR FIRST INVENTOR:			☐ A petition has been filed for this unsigned inventor		
Given Name (first and middle [if any]) GLENN NORMAN			Family Name or Surname SANDERS		
Inventor's Signature 				Date 7/13/05	
Residence: City FRANKLIN LAKES		State NEW JERSEY		Country UNITED STATES	
Citizenship UNITED STATES					
Mailing Address 235 OLDWOODS ROAD					
City FRANKLIN LAKES		State NEW JERSEY		Zip 07417	
Country UNITED STATES					
NAME OF SECOND INVENTOR:			☐ A petition has been filed for this unsigned inventor		
Given Name (first and middle [if any]) HOWARD GLENN			Family Name or Surname STARK		
Inventor's Signature 				Date July 13 2005	
Residence: City SPARTA		State NEW JERSEY		Country UNITED STATES	
Citizenship UNITED STATES					
Mailing Address 122 CONESTOGA TRAIL					
City SPARTA		State NEW JERSEY		Zip 07871	
Country UNITED STATES					
☐ Additional inventors or a legal representative are being named on the _____ supplemental sheet(s) PTO/SB/02A or 02LR attached hereto.					

[Page 2 of 2]

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY and CORRESPONDENCE ADDRESS INDICATION FORM

Application Number	TBA
Filing Date	July 14, 2005
First Named Inventor	GLENN NORMAN SANDERS
Title	VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM
Art Unit	TBA
Examiner Name	TBA
Attorney Docket Number	ZXC-001

I hereby revoke all previous powers of attorney given in the above-identified application.

I hereby appoint:

☒ Practitioners associated with the Customer Number:

00039689

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please recognize or change the correspondence address for the above-identified application to:

☒ The address associated with the above-mentioned Customer Number:

OR

☐ The address associated with Customer Number:

OR

☐ Firm or
Individual Name

Address

City

State

Zip

Country

Telephone

Fax

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96)

SIGNATURE of Applicant or Assignee of Record

Signature	<i>Glenn Norman Sanders</i>	Date	7/13/05
Name	GLENN NORMAN SANDERS	Telephone	(201) 405-1280
Title and Company	Individual		

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below.

☒ *Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY and CORRESPONDENCE ADDRESS INDICATION FORM

Application Number	TBA
Filing Date	July 14, 2005
First Named Inventor	GLENN NORMAN SANDERS
Title	VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM
Art Unit	TBA
Examiner Name	TBA
Attorney Docket Number	ZXC-001

I hereby revoke all previous powers of attorney given in the above-identified application.

I hereby appoint:

☒ Practitioners associated with the Customer Number:

00039689

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please recognize or change the correspondence address for the above-identified application to:

☒ The address associated with the above-mentioned Customer Number:

OR

☐ The address associated with Customer Number:

OR

☐ Firm or
Individual Name

Address

City

State

Zip

Country

Telephone


Fax

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96)

SIGNATURE of Applicant or Assignee of Record

Signature		Date	July 13, 2005
Name	HOWARD GLENN STARK	Telephone	(973) 729-6683
Title and Company	Individual		

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below.

☒ *Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PATENT APPLICATION SERIAL NO. _____

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE
FEE RECORD SHEET

07/18/2005 EHAILE1 00000032 11181062

01 FC:2011	150.00 OP
02 FC:2111	250.00 OP
03 FC:2311	100.00 OP

PTO-1556
(5/87)

*U.S. Government Printing Office: 2002 — 489-267/89033

Under the Paperwork Reduction Act of 1996, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PATENT APPLICATION FEE DETERMINATION RECORD

Substitute for Form PTO-875 Effective December 8, 2004

Application or Docket Number

11181062

APPLICATION AS FILED - PART I

(Column 1)

(Column 2)

SMALL ENTITY

OR

OTHER THAN
SMALL ENTITY

FOR	NUMBER FILED	NUMBER EXTRA
BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A
SEARCH FEE (37 CFR 1.16(k), (l), or (m))	N/A	N/A
EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A
TOTAL CLAIMS (37 CFR 1.16(i))	/ minus 20 =	.
INDEPENDENT CLAIMS (37 CFR 1.16(h))	/ minus 3 =	.
APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).	
MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))		

RATE (\$)	FEE (\$)
N/A	150.00
N/A	\$250
N/A	\$100
X\$ 25	.
X100	.
+180=	
TOTAL	500

RATE (\$)	FEE (\$)
N/A	300.00
N/A	\$500
N/A	\$200
X\$50	.
X200	.
+360=	
TOTAL	

* If the difference in column 1 is less than zero, enter "0" in column 2.

APPLICATION AS AMENDED - PART II

(Column 1)

(Column 2)

(Column 3)

SMALL ENTITY

OR

OTHER THAN
SMALL ENTITY

AMENDMENT A		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA
	Total (37 CFR 1.16(i))	.	Minus	**	=
	Independent (37 CFR 1.16(h))	.	Minus	***	=
	Application Size Fee (37 CFR 1.16(s))				
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))					

RATE (\$)	ADDITIONAL FEE (\$)
X\$ 25	=
X100	=
+180=	
TOTAL ADD'L FEE	

RATE (\$)	ADDITIONAL FEE (\$)
X\$50	=
X200	=
+360=	
TOTAL ADD'L FEE	

AMENDMENT B		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA
	Total (37 CFR 1.16(i))	.	Minus	**	=
	Independent (37 CFR 1.16(h))	.	Minus	***	=
	Application Size Fee (37 CFR 1.16(s))				
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))					

RATE (\$)	ADDITIONAL FEE (\$)
X\$ 25	=
X100	=
+180=	
TOTAL ADD'L FEE	

RATE (\$)	ADDITIONAL FEE (\$)
X\$50	=
X200	=
+360=	
TOTAL ADD'L FEE	

* If the entry in column 1 is less than the entry in column 2, write "0" in column 3.

** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".

*** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".

The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**NONPUBLICATION REQUEST
UNDER
35 U.S.C. 122(b)(2)(B)(i)**

First Named Inventor	GLENN NORMAN SANDERS	
Title	VIRTUAL WIRELESS MULTITRACK RECORDING SYSTEM	
Attorney Docket Number	ZXC-001	

I hereby certify that the invention disclosed in the attached application **has not and will not be** the subject of an application filed in another country, or under a multilateral agreement, that requires publication at eighteen months after filing.

I hereby request that the attached application not be published under 35 U.S.C. 122(b).


Signature

7/13/05
Date

Rita C. Chipperson, Esq.,

54,031

Typed or printed name

Registration Number, if applicable

(973) 993-1878

Telephone Number

This request must be signed in compliance with 37 CFR 1.33(b) and submitted with the application **upon filing**.

Applicant may rescind this nonpublication request at any time. If applicant rescinds a request that an application not be published under 35 U.S.C. 122(b), the application will be scheduled for publication at eighteen months from the earliest claimed filing date for which a benefit is claimed.

If applicant subsequently files an application directed to the invention disclosed in the attached application in another country, or under a multilateral international agreement, that requires publication of applications eighteen months after filing, the applicant **must** notify the United States Patent and Trademark Office of such filing within forty-five (45) days after the date of the filing of such foreign or international application. **Failure to do so will result in abandonment of this application (35 U.S.C. 122(b)(2)(B)(iii)).**

This collection of information is required by 37 CFR 1.213(a). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 6 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.