US011610605B1

(12) **United States Patent**
Sanders et al.

(10) **Patent No.: US 11,610,605 B1**
(45) **Date of Patent: Mar. 21, 2023**

(54) **SYSTEMS AND METHODS FOR REPAIRING REMOTELY RECORDED AUDIO DATA**

(71) Applicant: **Zaxcom, Inc.**, Pompton Plains, NJ (US)

(72) Inventors: **Glenn Norman Sanders**, Franklin Lakes, NJ (US); **Howard Glenn Stark**, Sparta, NJ (US)

(73) Assignee: **ZAXCOM, Inc.**, Pompton Plains, NJ (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/157,436**

(22) Filed: **Jan. 25, 2021**

Related U.S. Application Data

(63) Continuation of application No. 16/397,895, filed on Apr. 29, 2019, now Pat. No. 10,901,680, which is a (Continued)

(51) **Int. Cl.**
G11B 20/10 (2006.01)
H04N 21/41 (2011.01)
(Continued)

(52) **U.S. Cl.**
CPC ***G11B 20/10527*** (2013.01); ***G06F 1/26*** (2013.01); ***G06F 3/16*** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC G11B 20/10527
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,872,195 A 10/1989 Leonard
5,471,658 A 11/1995 Iacono
(Continued)

FOREIGN PATENT DOCUMENTS

GB WO 2004/091219 A1 10/2004
WO 2004091219 10/2004

OTHER PUBLICATIONS

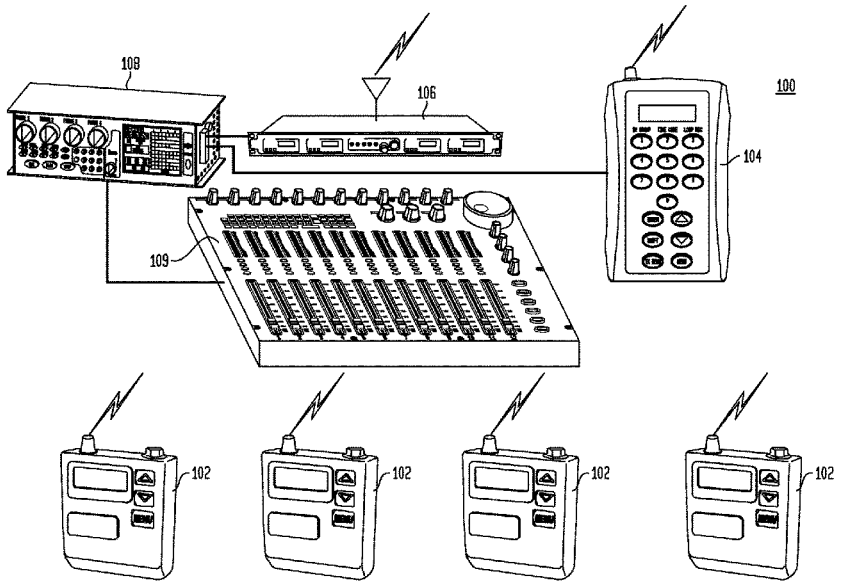
Petition for Inter Partes Review of U.S. Pat. No. 9,336,307, (Exhibits Listed Separately Herein) filed Apr. 25, 2018, IPR2018-00972.
(Continued)

Primary Examiner — Keith Ferguson
(74) *Attorney, Agent, or Firm* — Rita C. Chipperson, Esq.; Chipperson Law Group, P.C.

(57) **ABSTRACT**

Systems and methods for wirelessly recording multi-track audio files. In some aspects, each performer is equipped with a local audio device capable of locally recording the respective performer's audio while also transmitting it to a master recorder. Functions of the local audio device may be adjusted remotely. The locally recorded audio may be used to repair or replace any audio lost or corrupted during transmission to the master recorder. Such repair or replacement may be performed electronically or via playback of the locally recorded audio. In other aspects, a master recorder is not required since all locally recorded audio may be combined or otherwise processed post-recording. Locally recorded audio may include identifiers to aid in post-recording identification of such audio. A multi-memory unit is provided to facilitate manipulation and processing of audio files. A method for automatically adjusting local audio device power mode based upon recorder status is also disclosed.

21 Claims, 22 Drawing Sheets



Related U.S. Application Data

continuation of application No. 15/225,056, filed on Aug. 1, 2016, now Pat. No. 10,276,207, which is a continuation of application No. 14/808,589, filed on Jul. 24, 2015, now Pat. No. 9,406,224, which is a continuation of application No. 13/530,040, filed on Jun. 21, 2012, now Pat. No. 9,094,636, which is a continuation-in-part of application No. 12/838,164, filed on Jul. 16, 2010, now Pat. No. 8,842,854, which is a continuation-in-part of application No. 11/404,735, filed on Apr. 14, 2006, now Pat. No. 7,929,902, which is a continuation-in-part of application No. 11/181,062, filed on Jul. 14, 2005, now Pat. No. 7,711,443.

(51) **Int. Cl.**

G08C 25/02	(2006.01)
H04N 21/422	(2011.01)
G06F 1/26	(2006.01)
G06F 3/16	(2006.01)
G08C 25/04	(2006.01)
H04W 52/24	(2009.01)
H04W 52/38	(2009.01)
H04R 29/00	(2006.01)

(52) **U.S. Cl.**

CPC ***G06F 3/165*** (2013.01); ***G08C 25/02*** (2013.01); ***G08C 25/04*** (2013.01); ***H04N 21/4126*** (2013.01); ***H04N 21/42204*** (2013.01); ***H04R 29/004*** (2013.01); ***H04W 52/243*** (2013.01); ***H04W 52/38*** (2013.01); *G11B 2020/10574* (2013.01); *H04R 2420/07* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,479,351	A	12/1995	Woo et al.	
5,917,835	A	6/1999	Barrett et al.	
6,075,500	A	6/2000	Kurz et al.	
6,571,211	B1	5/2003	Dwyer et al.	
6,678,501	B1	1/2004	Valeski	
6,717,737	B1	4/2004	Haglund	
6,825,875	B1	11/2004	Strub et al.	
6,862,429	B2	3/2005	Efron et al.	
7,079,026	B2	7/2006	Smith	
7,929,902	B1	4/2011	Sanders et al.	
8,385,814	B2	2/2013	Sanders et al.	
9,336,307	B2	5/2016	Sanders et al.	
10,901,680	B1	1/2021	Sanders et al.	
2002/0159179	A1	10/2002	Nagai et al.	
2003/0130016	A1*	7/2003	Matsuura	H04R 5/033 455/569.1
2004/0028041	A1	2/2004	Gleissner	
2004/0220487	A1	11/2004	Vyshedskiy et al.	
2004/0237115	A1	11/2004	Horiuchi	
2005/0136839	A1	6/2005	Seshadri et al.	
2005/0271355	A1	12/2005	Gilor	
2006/0083388	A1	4/2006	Rothschild	
2006/0270465	A1	11/2006	Lee et al.	

OTHER PUBLICATIONS

File History of U.S. Appl. No. 13/774,744 filed in IPR2018-00972 (Ex 1002).

Iwamura, Soichi et al., Dropout Replacement with Backup Recording at Tape's Margin, (IEEE International Conference on Consumer Electronics Digest of Technical Papers) 1993, pp. 84-85, ISBN:0-7803-0843-3, USA, filed in IPR2018-00972 (Ex 1007).

Declaration of John Tinsman dated Apr. 25, 2018, filed in IPR2018-00972 (Ex 1011).

Curriculum Vitae of John Tinsman filed in IPR2018-00972 (Ex 1012).

U.S. Appl. No. 60/685,974, filed in IPR2018-00972 (Ex 1013).

Zaxcom Inc.'s First Amended Complaint (Including All Exhibits), *Zaxcom, Inc.* v. *Lectrosonics, Inc.*, 1:17-cv-3408 (E.D. N.Y.), Filed Nov. 16, 2017.

Zaxcom, Inc.'s Patent Owner Response (Including Non-Duplicative Exhibits) filed in Case IPR2018-00972 on Feb. 5, 2019.

RF Solutions Ltd., "LS-40MM—GPS Receiver Module", product specification dated Sep. 1, 2004, UK, filed in IPR2018-00972 (ex 1019).

Zaxcom, Inc.'s Patent Owner Preliminary Response Pursuant To 37 C.F.R. § 42.107(a) (Exhibits Omitted Since A Subset ofThose Submitted with Item 8 Document) filed in Case IPR2018-00972 on Aug. 8, 2018.

Declaration of Glenn Norman Sanders filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2001.

Resume of James M. Defilippis filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2002.

Deva Recorder Information from http://www.zaxcom.com taken on Jul. 8, 2005, filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2023.

RX4900 Photo filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2024.

Declaration of Ms. Rita Chipperson, Esq. filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2078.

Declaration of Mr. James M. Defilippis filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2079.

A photograph of a Zaxcom device taken by Mar. 2005 filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2080.

Diagram of a Zaxcom device (the IFBTX7) that was taken by Mar. 2005 filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2081.

Document of the Zaxcom TRX900 Wireless Microphone with integrated IFB, remote control, time-code and recording a Zaxcom device (the IFBTX7) that was created by Mar. 2005, filed with IPR2018-00972 Preliminary Response on Aug. 8, 2018 as Exhibit 2082.

Zaxcom, Inc.'s Complaint, *Zaxcom, Inc.* v. *Lectrosonics, Inc.*, 1 :17-cv-3408 (E.D.N.Y.), Filed Jun. 6, 2017.

PTAB Decision issued Nov. 7, 2018 for IPR2018-00972.

Petition for Inter Partes Review of U.S. Pat. No. 8,385,814 (Exhibits Listed Separately Herein) filed Jun. 12, 2018, IPR2018-01130.

Petition for Inter Partes Review of U.S. Pat. No. 7,929,902 (Exhibits Listed Separately Herein) filed Jun. 12, 2018, IPR2018-01129.

File History of U.S. Appl. No. 11 /404,735, filed with IPR2018-01129 Petition as Ex. 1002.

File History of U.S. Appl. No. 12/772,471, filed with IPR2018-01130 Petition as Ex. 1002.

Recon, Digital Video Recorder, available at https://web.archive.org/web/20030202025011/ http://www.ffv.com:80/assets/products/Recon%202%20Side.PDF (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1022.

Pess Release, Fast Forward Video's Compact ReconTM DVR Board Helps Playback Technologies' Raptor DDRs Take Off, available at https://web.archive.org/web/20031217204947/ http://www.ffv.com:80/assets/N ews/pressreleases/AUG2003/4-7-03%20Raptor%20Review.PDF (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1023.

Press Release, Fast Forward Video to Lauch New Store & View ReconTM Miniature DVR at NAB, available at https://web.archive .org/web/20031 00907 5552/ http: //ffv.com: 80/assets/News/pressreleases/AUG2003/1-31-03%20Store % 20and%20View%20Release.PDF (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1024.

Press Release, iShot Imaging's Body-Wearable Recorder Dresses Up with the Recon from Fast Forward Video, available athttps://web.archive.org/web/20031217211521 / http://www.ffv.com:80/

(56) **References Cited**

OTHER PUBLICATIONS

assets/N ews/pressreleases/AUG2003/4-7-03%20Intertest%20Release.PDF (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1025.
NAB's Hottest Products, available athttps://www.tvtechnology.com/miscellaneous/nabs-hottest-products (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1026.
Zaxcom webpage, Digital Wireless, available at https://web.archive.org/web/20040605201811 / http://zaxcom.com:80/audio/wireless.shtml (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1027.
Nist, Time and Frequency Transfer using One-Way GPS, available at https://tf.nist.gov/time/oneway.htm (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1028.
Sony LANC Protocol, available at http://www.boehmel.de/lanc.htm (last visited Jun. 5, 2018), Filed with IPR2018-01130 Petition as Ex. 1029.
Specification of the Broadcast Wave Format, EBU Tech 3285 Technical Specification, European Broadcasting Union, Version 1 (Jul. 2001), Filed with IPR2018-01130 Petition as Ex. 1030.
Document No. 2004005, AV/C Tape Recorder/Player Subunit Specification 2.4, 1394 Trade Association, Sep. 1, 2004, Filed with IPR2018-01130 Petition as Ex. 1031.
PTAB Decision IPR2018-01130, Jan. 24, 2019.
Zaxcom, Inc.'s Patent Owner Preliminary Response Pursuant To 37 C.F.R. §42.107(a)(Exhibits Omitted Since A Subset of Those Submitted with Item 8 Document), IPR2018-01130.
Zaxcom, Inc.'s Patent Owner Preliminary Response Pursuant To 37 C.F.R. §42.107(a),(Exhibits Omitted Since A Subset of Those Submitted with Item 8 Document) IPR2018-01129.
PTAB Decision IPR2018-01129, Jan. 24, 2019.
Lectrosonics, Inc's Answer, New Mexico, Case No. 1:19-cv-00109-LF-KBM.
Zaxcom, Inc.'s Complaint (Exhibits Omitted Since A Subset of Those Submitted with Item 7 Document), *Zaxcom, Inc.* v. *Lectrosonics, Inc.*, 2:17-cv-02840 (D.N.J.), Filed Apr. 25, 2017.
Lectrosonics, Inc.'s Cross—Appellant Principal and Response Brief, *Zaxcom, Inc.* v. *Lectrosonics, Inc.*, Case Nos. 20-1350, -1405, U.S. Court of Appeals forthe Federal Circuit, Filed Sept. 4, 2020.
USPTO Intervenor Brief, *Zaxcom, Inc.*, v. *Lectrosonics, Inc.*, Case Nos. 20-1350, -1405, U.S. Court of Appeals forthe Federal Circuit, Filed Nov. 13, 2020.
Zaxcom, Inc.'s Appellant Response Brief, *Zaxcom, Inc.*, v. *Lectrosonics, Inc.*, Case Nos. 2020-1921, -1922, -1943,-1944, U.S. Court of Appeals forthe Federal Circuit, Filed Dec. 1, 2020.
Joint Appendix, *Zaxcom, Inc.*, v. *Lectrosonics, Inc.*, Case Nos. 20-1350, -1405, U.S. Court of Appeals forthe Federal Circuit, Filed Feb. 23, 2021.
Cross—Appeal Reply Brief of Lectrosonics, Inc., *Zaxcom, Inc.*, v. *Lectrosonics, Inc.*, Case Nos. 20-1350, -1405, U.S. Court of Appeals for the Federal Circuit, Filed Jan. 27, 2021.
Corrected US Inventor Inc. Brief, *Zaxcom, Inc.*, v. *Lectrosonics, Inc.*, Case Nos. 2020-1921, -1922, -1943, -1944, U.S. Court of Appeals for the Federal Circuit, Filed Jan. 19, 2021.
Reply Brief and Cross Appeal Response Brief of Appellant Zaxcom, Inc., *Zaxcom, Inc.*, v. *Lectrosonics, Inc.*, Case Nos. 20-1350, -1405, U.S. Court of Appeals forthe Federal Circuit, Filed Dec. 23, 2020.
Corrected Amicus Curiae , *Zaxcom, Inc.*, v. *Lectrosonics, Inc.*, Case Nos. 2020-1921, -1922, -1943, -1944, U.S. Court of Appeals for the Federal Circuit, Filed Dec. 16, 2020.
Corrected Amicus Brief Filed by US Inventor, Inc., U.S. Court of Appeals for the Federal Circuit, Filed Dec. 31, 2020.
Opening Brief Filed by Cross-Appellant Lectrosonics, Inc., Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Mar. 12, 2021.
Supp. Decl. Mr. James M. DeFilippis, IPR2018-00972, dated Feb. 4, 2018.
Declaration of Mr. Donavan Dear, IPR2018-00972, dated January 9.
Patent Owner's Motion to Amend, IPR2018-00972, dated Feb. 5, 2018.
DeFillipis Deposition Transcript, IPR 2018-00972, taken Apr. 15, 2019.
Wexler Deposition Transcript, IPR2018-00972, taken Apr. 18, 2019.
Chipperson Deposition Transcript, IPR 2018-00972, taken Apr. 24, 2019.
Sanders Deposition Transcript, IPR 2018-00972, taken Apr. 24, 2019.
Sarokin Deposition Transcript, IPR 2018-00972, taken Apr. 26, 2019.
Operation of Wireless Microphones, Consumer Guides, FCC.
Merriam-Webster's Collegiate Dictionary, Lectrosonics Exhibit 1032, IPR2018-00972.
Newton's Telecom Dictionary, Lectrosonics Exhibit 1032, IPR2018-00972.
Petitioner's Reply to Patent Owner's Response, IPR2018-00972, dated May 7, 2019.
Petitioner's Opposition to Motion to Amend, IPR2018-00972, dated May 7, 2019.
Perkins, P., Tascam DR10 mini recorder in use—JWSOUNDGROUP, Equipment, Mar. 30, 2015.
Reply in support of motion to amend, IPR2018-00972, dated Jun. 2, 2019.
Patent Owner Sur-Reply, IPR2018-00972, dated Jun. 7, 2019.
Petitioner's Surreply in Opposition to Motion to Amend, IPR2018-00972, Jul. 8, 2019.
Declaration of Glenn Norman Sanders, IPR2018-01129, dated Apr. 22, 2019.
Declaration of Ms. Rita Chipperson, IPR2018-00972, Dated Feb. 5, 2019.
Grass Valley Launches K2 Server, TVTechnology, Aug. 18, 2005.
Zaxcom, Inc.'s Patent Owner Motion To Amend, IPR2018-01129, dated Apr. 24, 2019.
GV Grass Valley Thomson K2 Hd Sdi Media Client Server K2-HD-13, eBay.
Declaration of William Sarokin, IPR2018-00972, dated Jan. 18, 2019.
Declaration of Mr. Jeffrey S. Wexler, IPR2018-00972, Jan. 9, 2019.
Zaxcom Exhibit 2110, Microsoft Encarta College Dictionary.
Supplemental Declaration of Mr. James M. Defilippis, IPR2018-01129, dated Apr. 23, 2019.
Zaxcom, Inc.'s Patent Owner Response, IPR2018-01129, dated Apr. 24, 2019.
Petitioner's Opposition to the Motion to Amend, IPR2018-01130, dated Jul. 24, 2019.
Petitioner's Reply, IPR2018-01129, dated Jul. 24, 2019.
Petitioner's Opposition to the Motion to Amend, IPR2018-01129, Jul. 24, 2019.
DeFillipis Deposition Transcript, IPR2018-01129 taken Jul. 12, 2019.
Zaxcom, Inc.'s Patent Owner Motion To Amend, IPR2018-01130, dated Apr. 24, 2018.
Zaxcom, Inc.'s Patent Owner Response, IPR2018-01130, dated Apr. 24, 2019.
Petitioner's Reply to Patent Owner's Response, IPR2018-01130, dated Jul. 24, 2019.
Corrected Response Brief Filed by Cross-Appellant Lectrosonics, Inc., Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Mar. 24, 2021.
Intervenor Brief Filed by Intervenor Andrew Hirshfeld, Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Jun. 7, 2021.
Reply Brief Filed by Appellant Zaxcom, Inc., Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Sep. 17, 2021.
Reply Brief Filed by Cross-Appellant Lectrosonics, Inc., Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Oct. 22, 2021.
Appendix Filed by Appellant Zaxcom, Inc., Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Oct. 29, 2021.
Corrected Reply Brief Filed by Cross-Appellant Lectrosonics, Inc., Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Nov. 2, 2021.

(56) **References Cited**

OTHER PUBLICATIONS

Corrected Appendix Filed by Appellant Zaxcom, Inc., Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Nov. 4, 2021.
Corrected Amicus Brief Filed by Honorable Paul R. Michel, Case No. 2020-1921, U.S. Court of Appeals for the Federal Circuit, Filed Dec. 29, 2021.
Opinion filed for the court by Lourie, Circuit Judge; Schall, Circuit Judge and Taranto, Circuit Judge. Case No. 20-1921, 20-1922, 20-1943, 20-1944; Entered Feb. 18, 2022.
Opinion filed for the court by Lourie, Circuit Judge; Schall, Circuit Judge and Taranto, Circuit Judge. Case No. 20-1350, 20-1405; Entered Feb. 18, 2022.
Petition for en banc rehearing filed by Appellant Zaxcom, Inc., Case No. 20-1350; Filed Mar. 18, 2022.
Response of Intervenor Katherine K. Vidal to Doc. No. [74], Case No. 20-1350; Filed May 4, 2022.
Response of Cross-Appellant Lectrosonics, Inc. to Doc. [74], Case No. 20-1350; Filed May 4, 2022.
Order filed denying petition for rehearing en banc [74] filed by Zaxcom, Inc., Case No. 20-1350; Filed May 20, 2022.
Mandate issued to the United States Patent and Trademark Office, Case No. 20-1350, 20-1405; Filed May 27, 2022.
Petitioner's Updated Exhibit List, IPR2018-00972, dated Jul. 31, 2019.
Petitioner's Demonstratives, IPR2018-00972, dated Jul. 31, 2019.
Hearing Demonstratives, IPR2018-00972, dated Jul. 31, 2019.
Exhibit 2111, IPR2018-00972, dated Aug. 5, 2019.
Notice of Appeal, IPR2018-00972, dated Jan. 7, 2020.
Petitioner's Notice of Cross-Appeal, IPR2018-00972, dated Jan. 17, 2020.
Hearing Transcript, IPR2018-00972, dated Oct. 30, 2019.
Judgment Final Written Decision Determining All Challenged Claims Unpatentable Granting Patent Owner's Motion to Amend, IPR2018-00972, dated Nov. 7, 2019.
Sur-Reply, IPR2018-01130, dated Aug. 26, 2019.
Exhibit 2119, IPR2018-01130, dated Aug. 26, 2019.
Exhibit 2117, IPR2018-01130, dated Aug. 26, 2019.
Exhibit 2118, IPR2018-01130, dated Aug. 26, 2019.
Exhibit 2120, IPR2018-01130, dated Aug. 26, 2019.
Reply in Support of Motion to Amend, IPR2018-01130, dated Aug. 26, 2019.
Petitioner's Objections to Patent Owner's Exhibits, IPR2018-01130, dated Sep. 3, 2019.
Petitioner's Surreply in Opposition to Patent Owner's Motion to Amend, IPR2018-01130, dated Sep. 24, 2019.
Petitioner's Updated Exhibit List, IPR2018-01130, dated Oct. 23, 2019.
Petitioner's Demonstratives, IPR2018-01130, dated Oct. 23, 2019.
Demonstratives, IPR2018-01130, dated Oct. 23, 2019.
Hearing Transcript, IPR2018-01130, dated Jan. 23, 2020.
Judgment—Final Written Decision Determining All Claims Unpatentable Granting Patent Owner's Motion to Amend, IPR2018-01130, dated Jan. 24, 2020.
Sur-Reply, IPR2018-01129, dated Aug. 26, 2019.
Exhibit 2117, IPR2018-01129, dated Aug. 26, 2019.
Exhibit 2118, IPR2018-01129, dated Aug. 26, 2019.
Exhibit 2119, IPR2018-01129, dated Aug. 26, 2019.
Exhibit 2120, IPR2018-01129, dated Aug. 26, 2019.
Reply in Support of Motion to Amend, IPR2018-01129, dated Aug. 26, 2019.
Petitioner's Objections to Patent Owner's Exhibits, IPR2018-01129, dated Sep. 3, 2019.
Petitioner's Surreply in Opposition to Patent Owner's Motion to Amend, IPR2018-01129, dated Sep. 24, 2019.
Petitioner's Demonstratives, IPR2018-01129, dated Oct. 23, 2019.
Petitioner's Updated Exhibit List, IPR2018-01129, dated Oct. 23, 2019.
Demonstratives, IPR2018-01129, dated Oct. 23, 2019.
Hearing Transcript, IPR2018-01129, dated Jan. 23, 2020.
Request for Precedential Opinion Panel (POP)—Exhibit 3001, IPR2018-01129 and IPR2018-01130, dated Feb. 24, 2020.
Rehearing Request, IPR2018-01130, Dated Feb. 21, 2020.
Rehearing Request, IPR2018-01129, Dated Feb. 21, 2020.
Order Denying POP Request, IPR2018-01130, Dated Apr. 6, 2020.
Order Denying POP Request, IPR2018-01129, Dated Apr. 6, 2020.
Decision Denying Patent Owner's Request for Rehearing, IPR2018-01130, dated Apr. 9, 2020.
Decision Denying Patent Owner's Request for Rehearing, IPR2018-01129, dated Apr. 9, 2020.
Brief of Appellant, CAFC Case No. 2020-1350, PTAB Case No. IPR2018-00972, dated May 26, 2020.
Corrected Response Brief Filed by Cross-Appellant Lectrosonics, Inc., Case No. 20-1350, U.S. Court of Appeals for the Federal Circuit, Filed Oct. 1, 2020.
Appendix Filed by Appellant Zaxcom, Inc., Case No. 20-1350, U.S. Court of Appeals for the Federal Circuit, Filed Feb. 3, 2021.
Judgment Affirmed, Case No. 20-1921, 20-1922, 20-1943, 20-1944; Filed Feb. 18, 2022.
Petition for en banc rehearing filed by Appellant Zaxcom, Inc., Case No. 20-1921; Filed Mar. 17, 2022.
Amicus Brief Filed on Petition by Honorable Paul R. Michel, Case No. 20-1921; Filed Apr. 1, 2022.
Corrected Amicus Brief Filed on Petition by US Inventor, Inc., Case No. 20-1921; Filed Apr. 26, 2022.
Response of Intervenor Katherine K. Vidal to Doc. No. [94], Case No. 20-1921; Filed May 4, 2022.
Response of Cross-Appellant Lectrosonics, Inc. to Doc No. [94], Case No. 20-1921; Filed May 4, 2022.
Order filed denying petition for en banc rehearing [94] filed by Zaxcom, Inc., Case No. 20-1921; Filed May 20, 2022.
Mandate Issued to the United States Patent and Trademark Office, Case No. 20-1921, 20-1922, 20-1943, 20-1944; Filed May 27, 2022.
Lectrosonics, Inc.'s Answer to Amended Complaint, U.S. District Court, Case No. 1:19-cv-00109-RB-JFR; Filed Feb. 20, 2019.

* cited by examiner

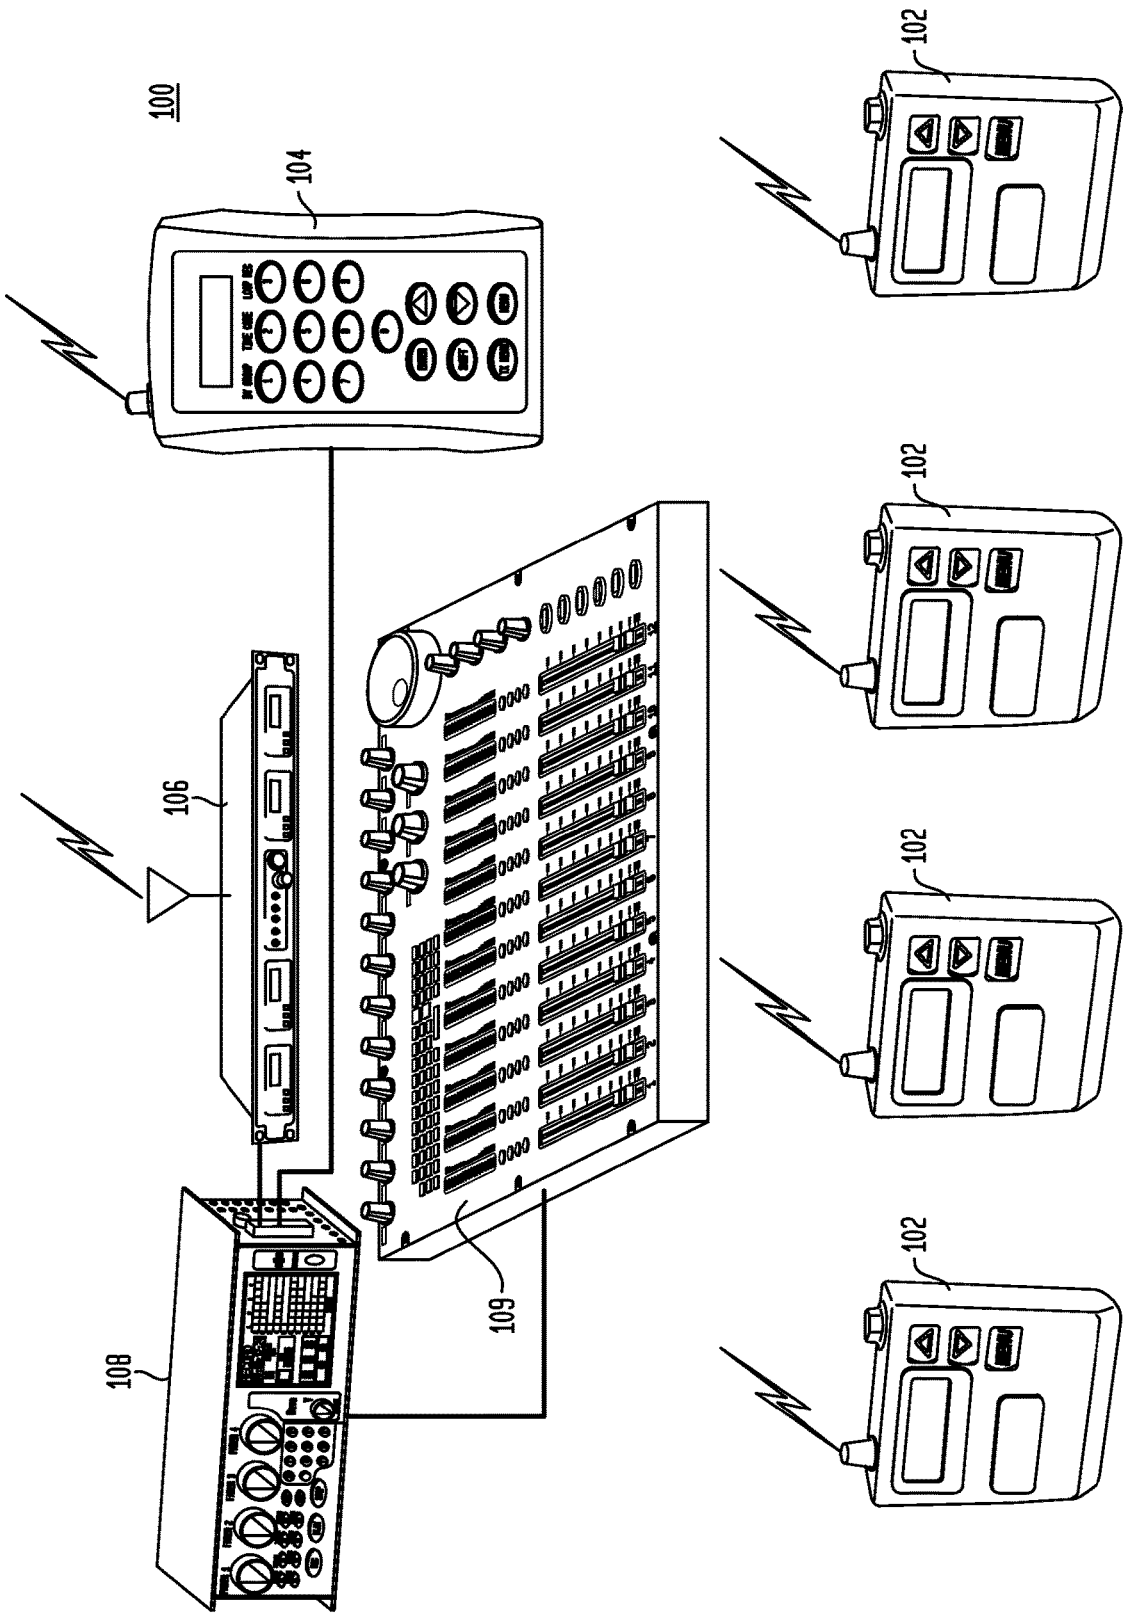


FIG. 1

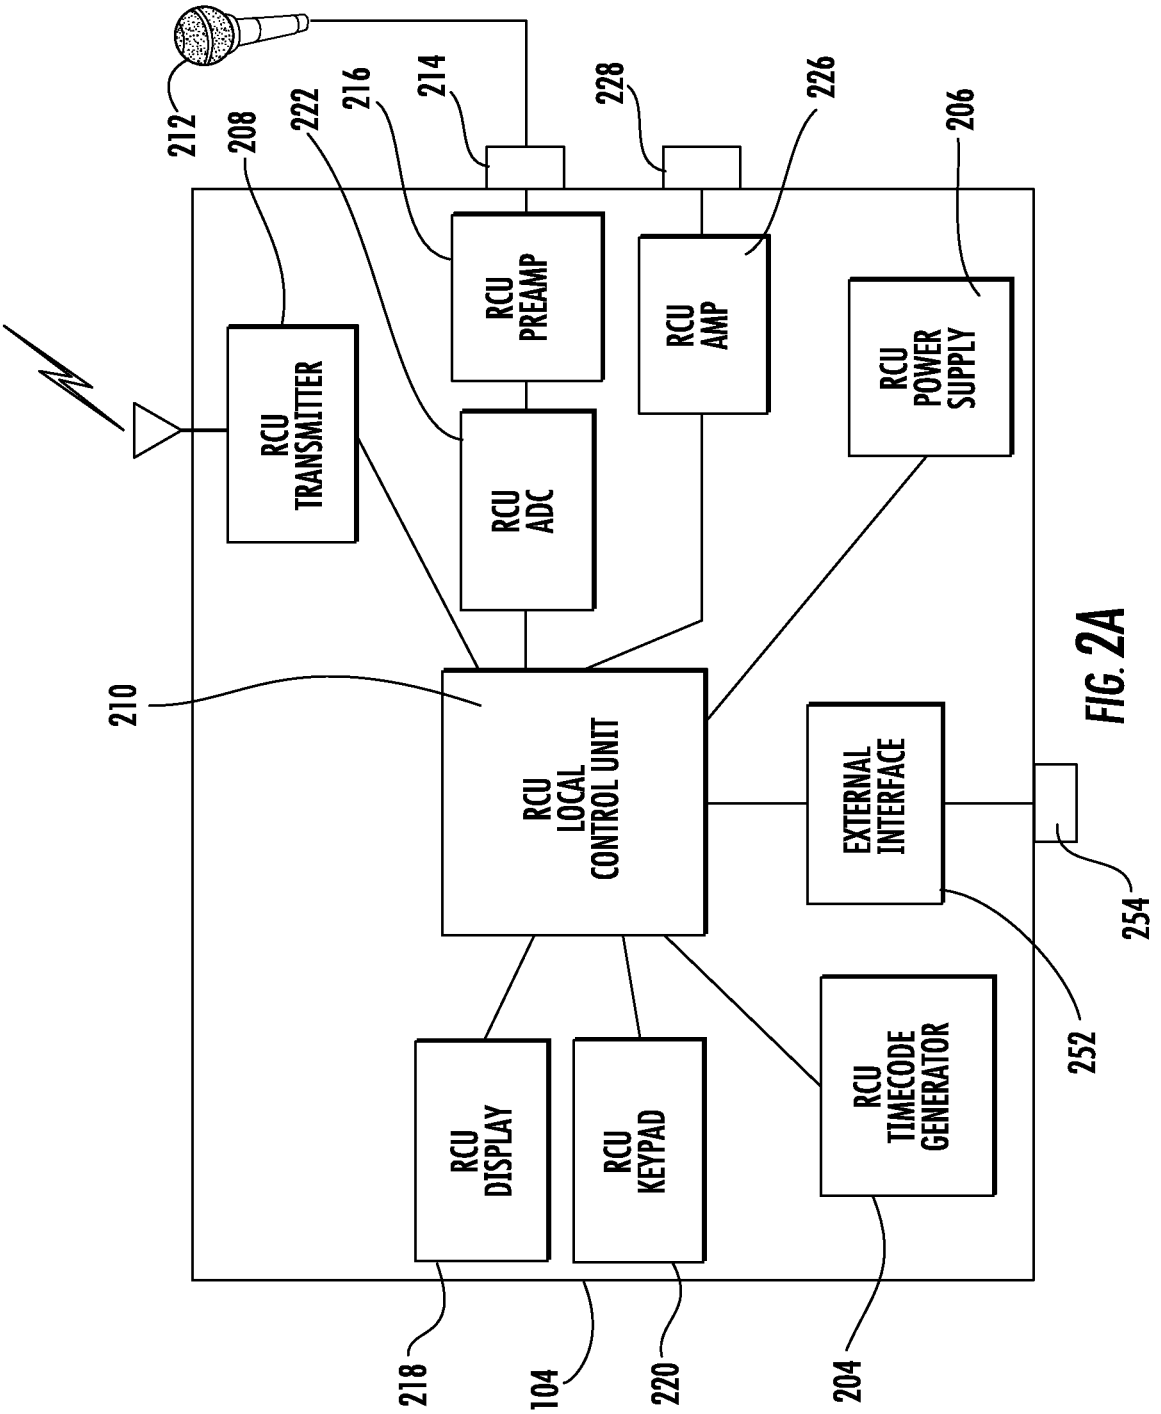

212
208
222
216
214
228
226
206
RCU PREAMP
RCU AMP
RCU POWER SUPPLY
RCU TRANSMITTER
RCU ADC
210
RCU LOCAL CONTROL UNIT
EXTERNAL INTERFACE
254
252
RCU DISPLAY
RCU KEYPAD
RCU TIMECODE GENERATOR
218
104
220
204

FIG. 2A

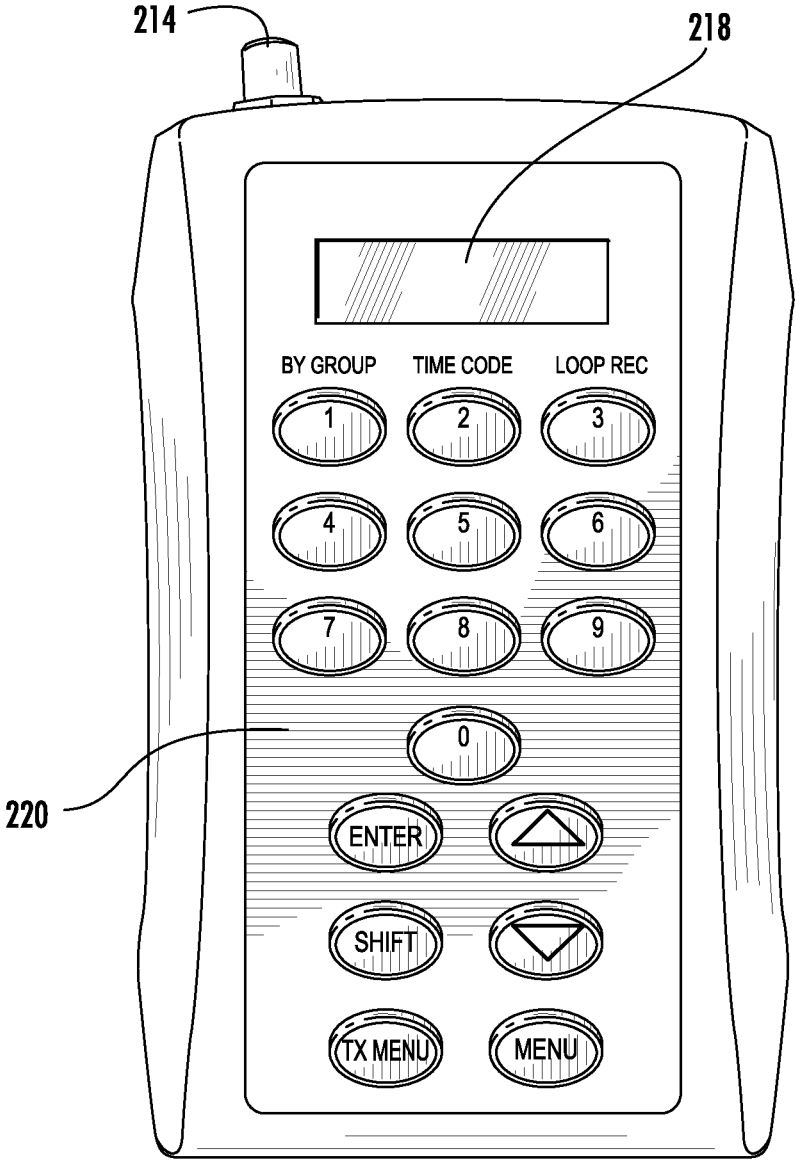

214
218
220
BY GROUP
TIME CODE
LOOP REC
1
2
3
4
5
6
7
8
9
0
ENTER
SHIFT
TX MENU
MENU

FIG. 2B

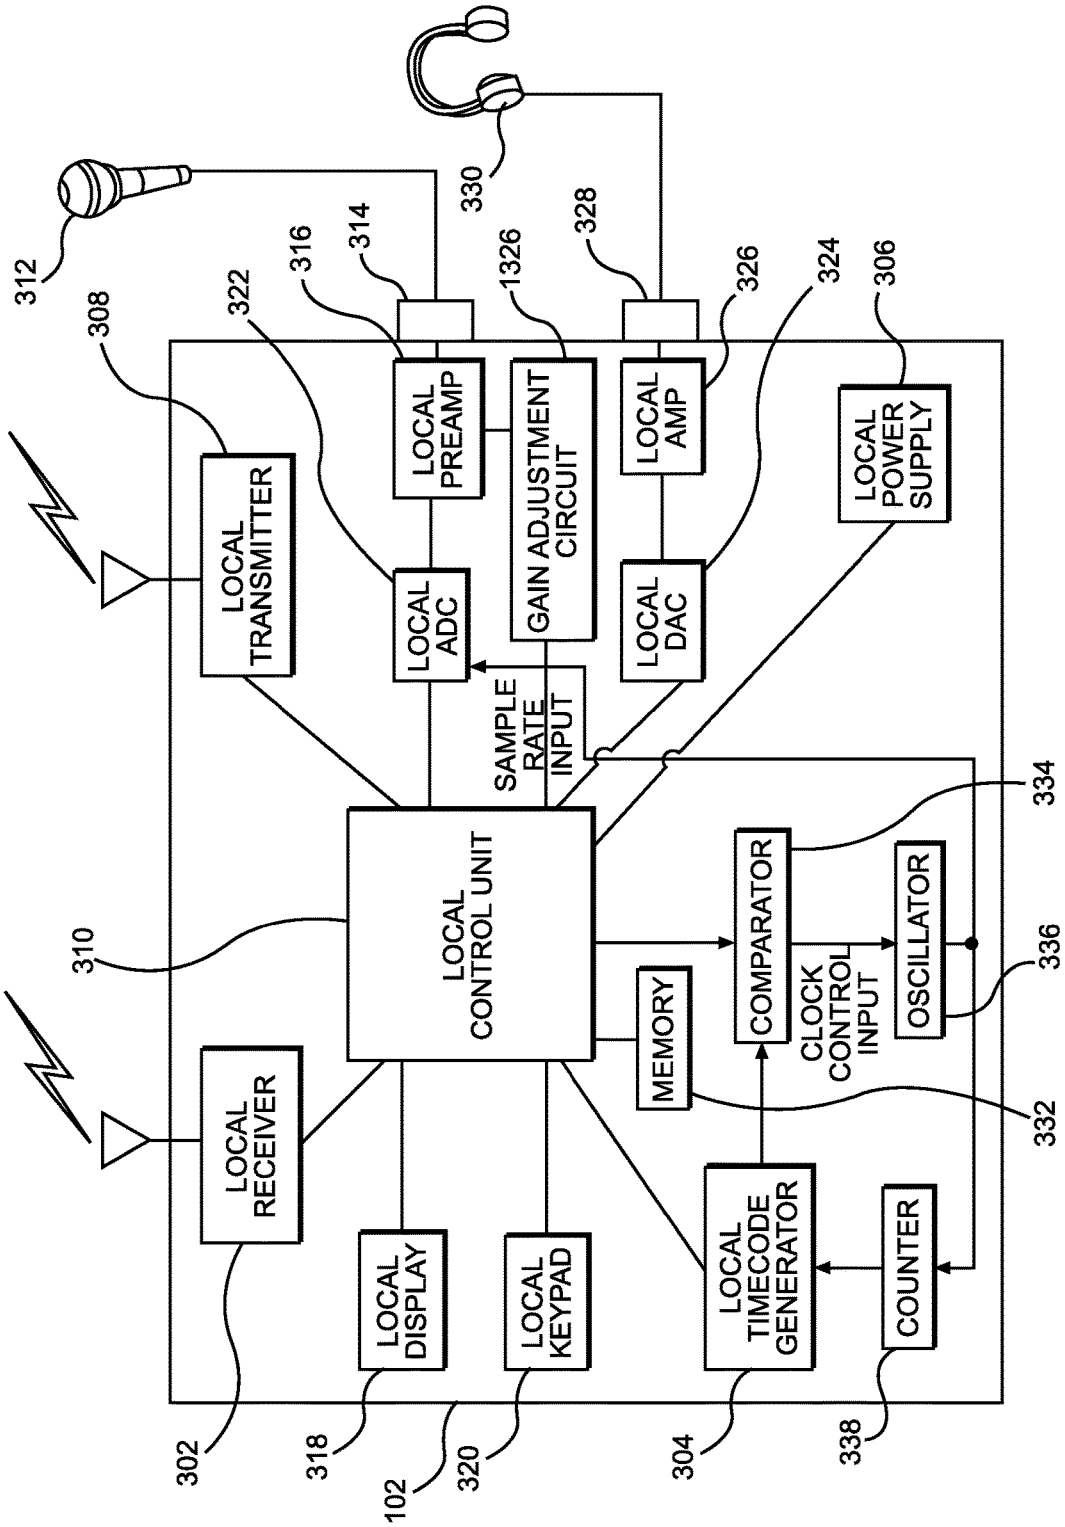

312
330
316
314
328
322
1326
326
324
306
308
LOCAL PREAMP
GAIN ADJUSTMENT CIRCUIT
LOCAL AMP
LOCAL POWER SUPPLY
LOCAL TRANSMITTER
LOCAL ADC
LOCAL DAC
SAMPLE RATE INPUT
LOCAL CONTROL UNIT
334
310
COMPARATOR
OSCILLATOR
336
CLOCK CONTROL INPUT
MEMORY
332
LOCAL RECEIVER
LOCAL TIMECODE GENERATOR
COUNTER
LOCAL DISPLAY
LOCAL KEYPAD
302
318
102
320
304
338

FIG. 3A

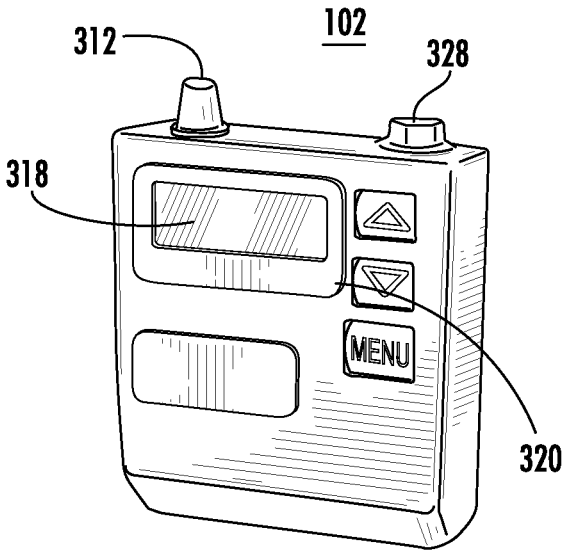


FIG. 3B

FIG. 4A

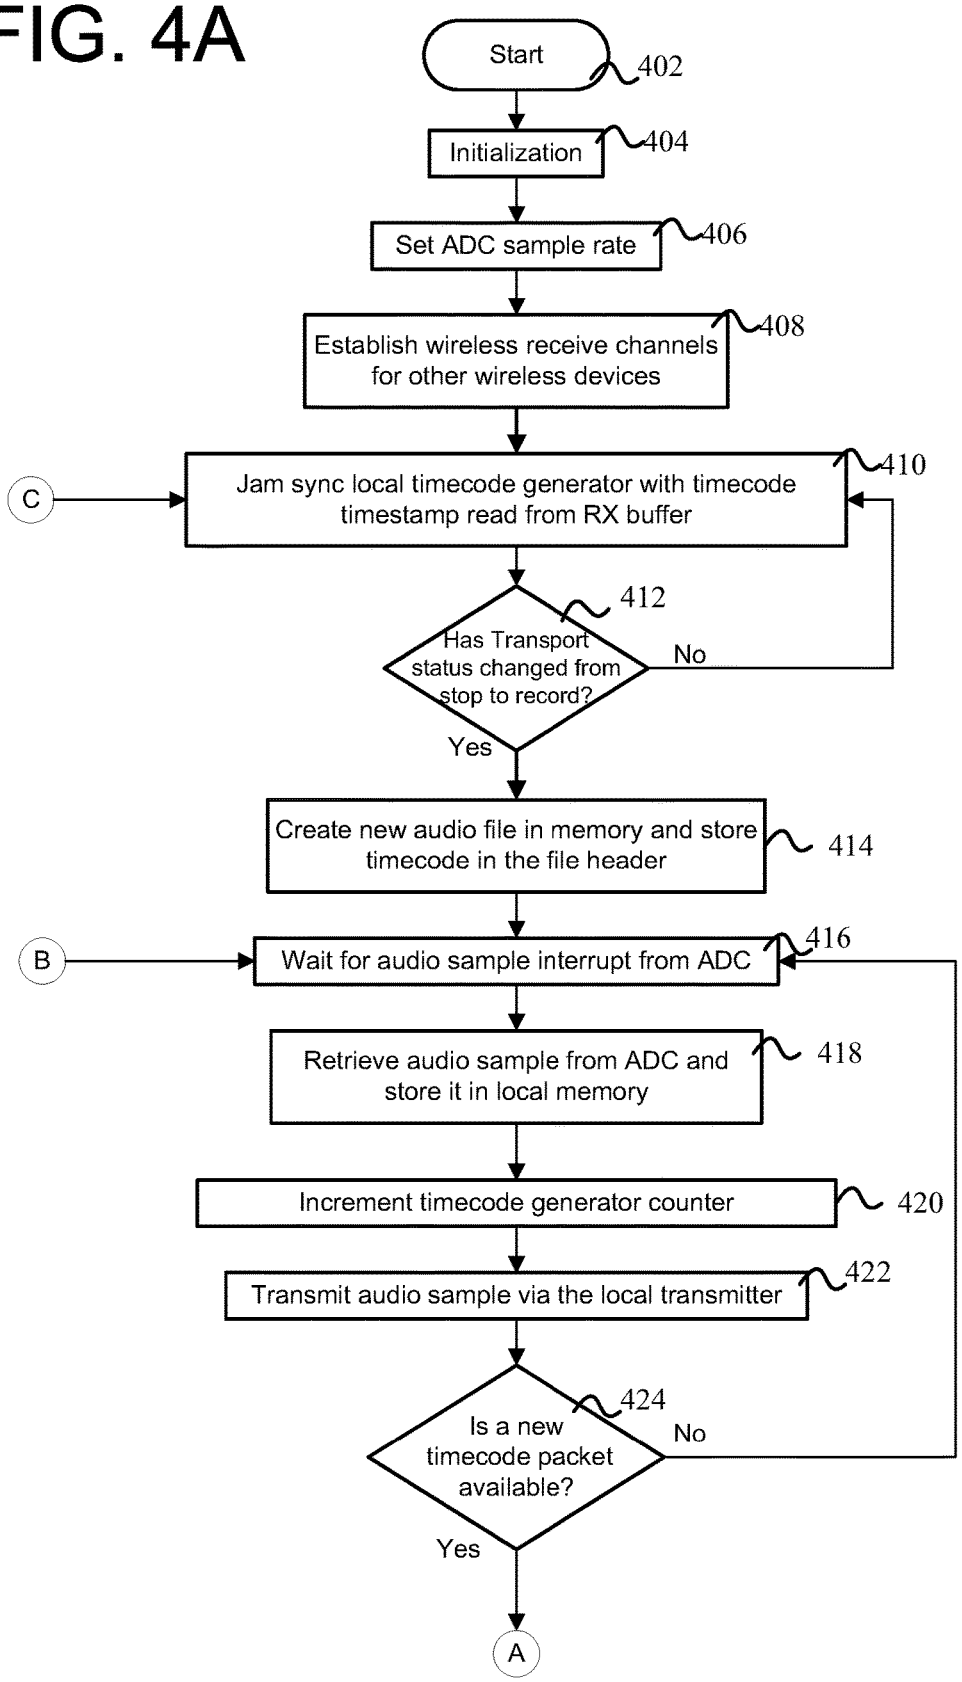

400
Start
402
Initialization
404
Set ADC sample rate
406
Establish wireless receive channels for other wireless devices
408
C
Jam sync local timecode generator with timecode timestamp read from RX buffer
410
412
Has Transport status changed from stop to record?
No
Yes
Create new audio file in memory and store timecode in the file header
414
B
Wait for audio sample interrupt from ADC
416
Retrieve audio sample from ADC and store it in local memory
418
Increment timecode generator counter
420
Transmit audio sample via the local transmitter
422
Is a new timecode packet available?
424
No
Yes
A

FIG. 4B

400

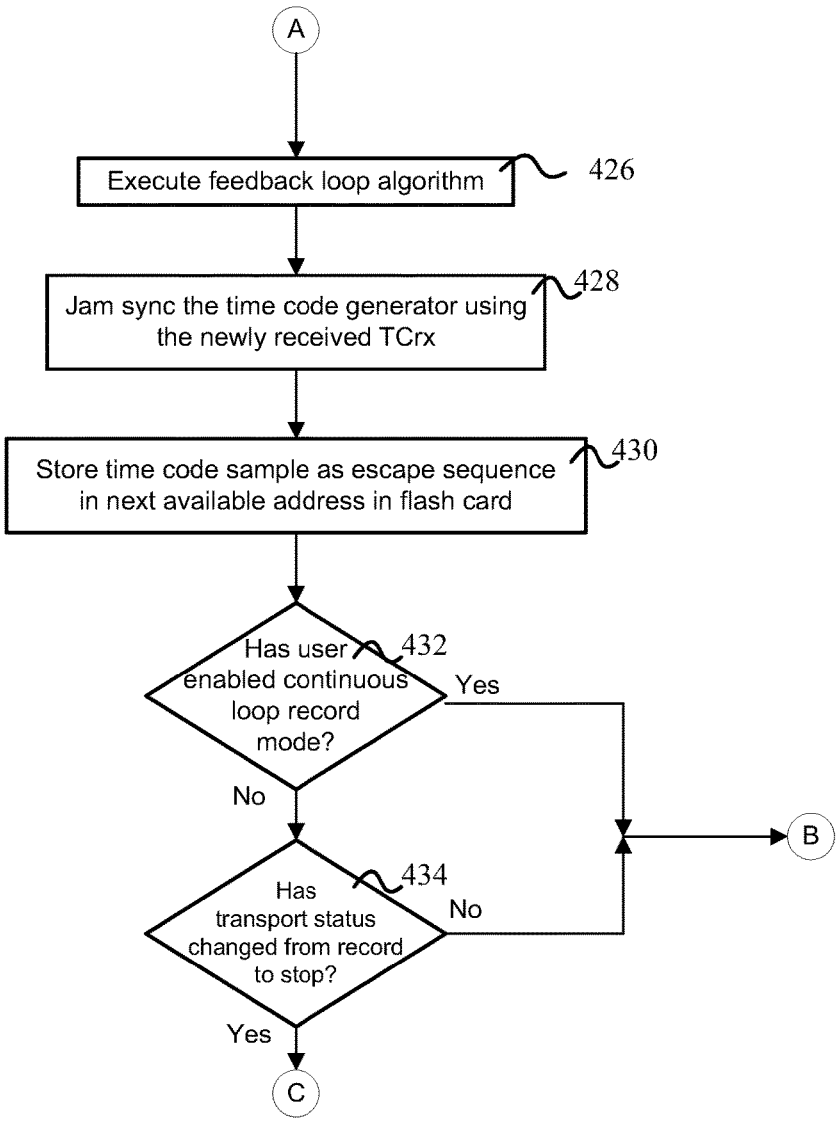

A
Execute feedback loop algorithm
426
Jam sync the time code generator using the newly received TCrx
428
Store time code sample as escape sequence in next available address in flash card
430
Has user enabled continuous loop record mode?
432
Yes
No
Has transport status changed from record to stop?
434
No
Yes
B
C

FIG. 5

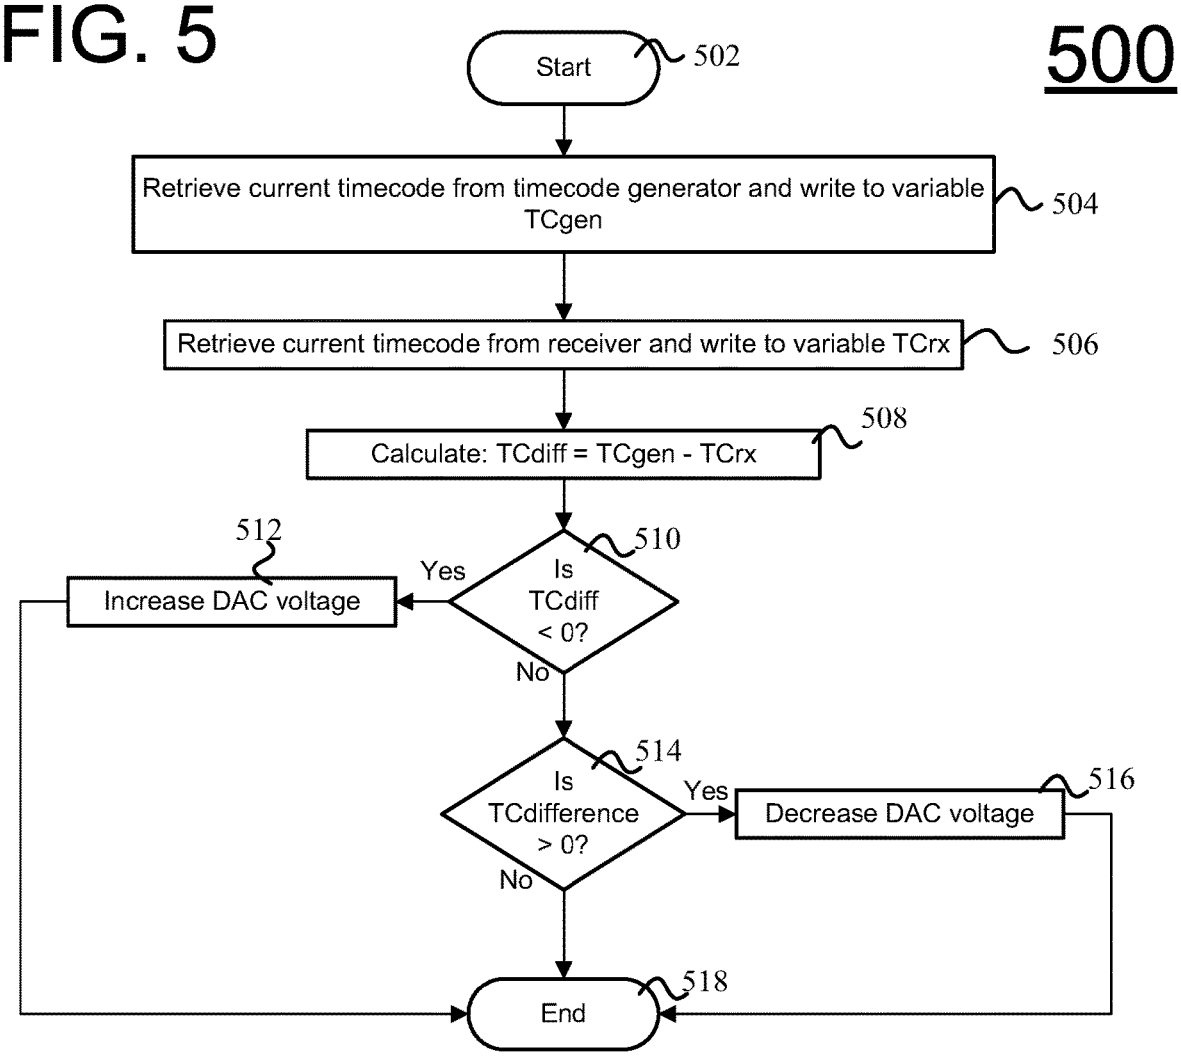

500
Start
502
Retrieve current timecode from timecode generator and write to variable TCgen
504
Retrieve current timecode from receiver and write to variable TCrx
506
Calculate: TCdiff = TCgen - TCrx
508
Is TCdiff < 0?
510
Yes
Increase DAC voltage
512
No
Is TCdifference > 0?
514
Yes
Decrease DAC voltage
516
No
End
518

FIG. 6

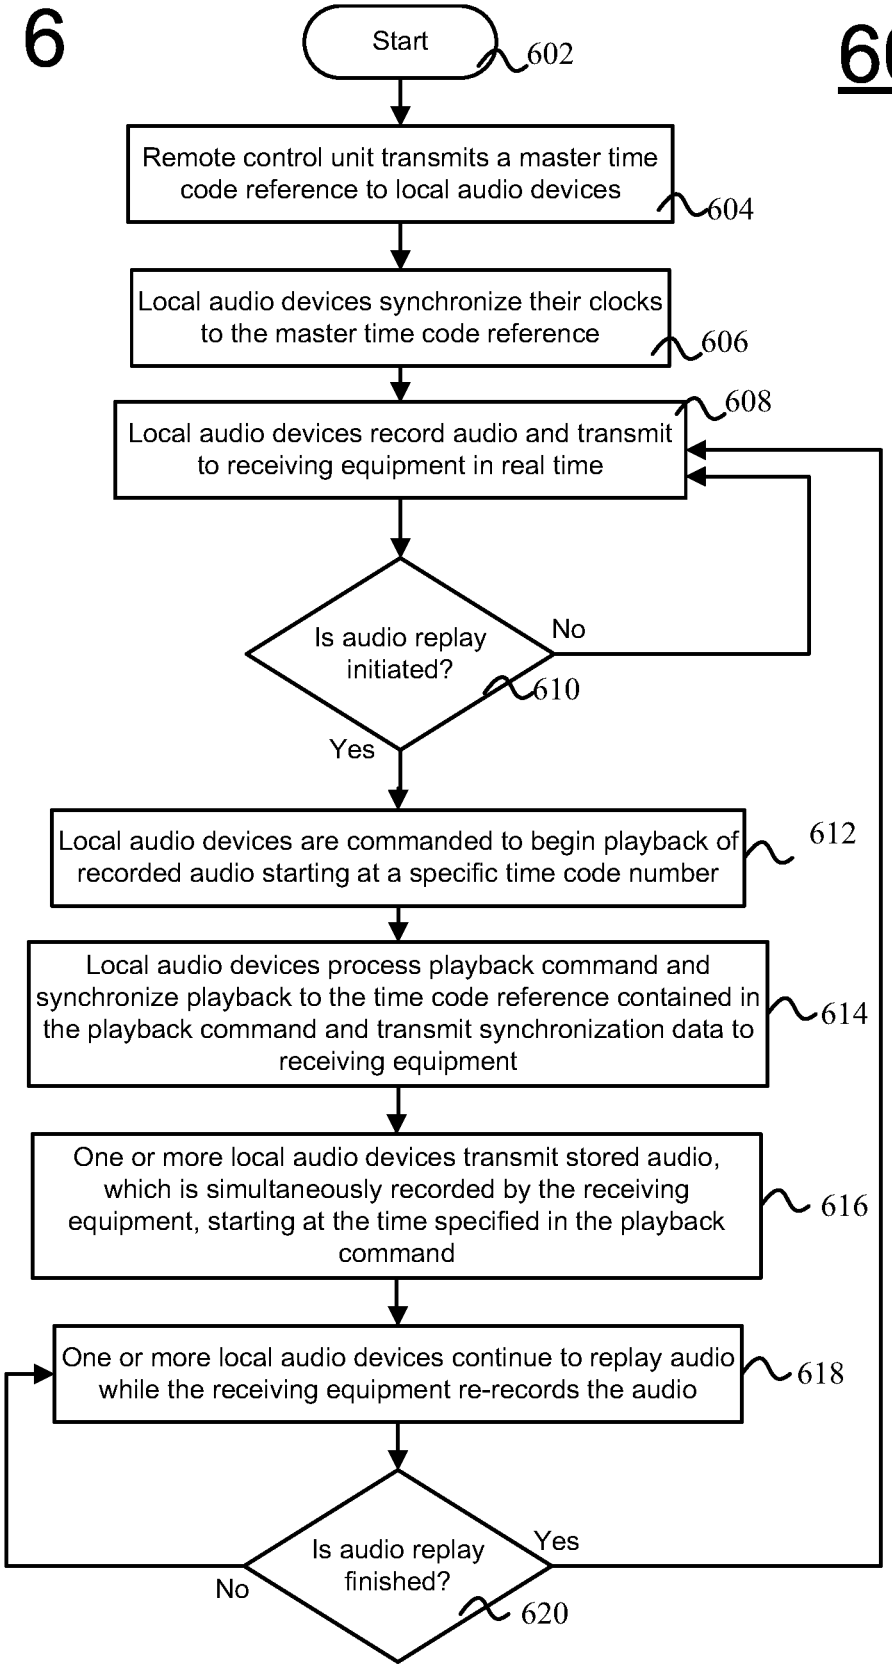
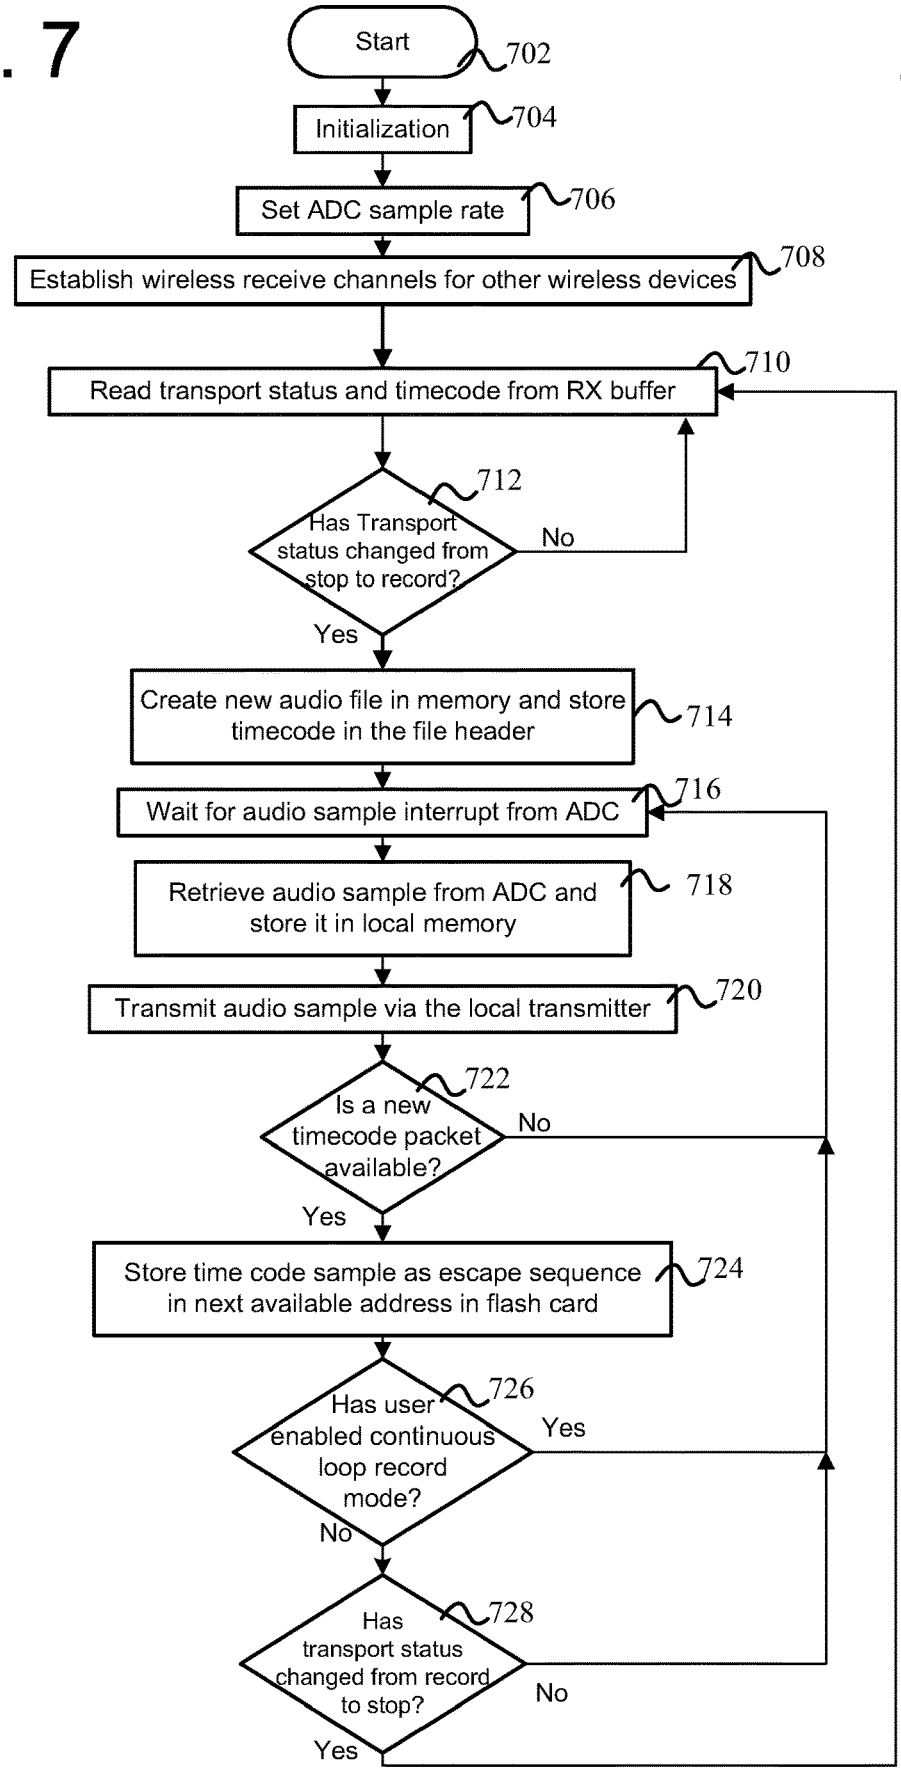

600
Start
602
Remote control unit transmits a master time code reference to local audio devices
604
Local audio devices synchronize their clocks to the master time code reference
606
608
Local audio devices record audio and transmit to receiving equipment in real time
Is audio replay initiated?
610
No
Yes
Local audio devices are commanded to begin playback of recorded audio starting at a specific time code number
612
Local audio devices process playback command and synchronize playback to the time code reference contained in the playback command and transmit synchronization data to receiving equipment
614
One or more local audio devices transmit stored audio, which is simultaneously recorded by the receiving equipment, starting at the time specified in the playback command
616
One or more local audio devices continue to replay audio while the receiving equipment re-records the audio
618
Is audio replay finished?
620
Yes
No

FIG. 7


700
Start
702
Initialization
704
Set ADC sample rate
706
Establish wireless receive channels for other wireless devices
708
Read transport status and timecode from RX buffer
710
Has Transport status changed from stop to record?
712
No
Yes
Create new audio file in memory and store timecode in the file header
714
Wait for audio sample interrupt from ADC
716
Retrieve audio sample from ADC and store it in local memory
718
Transmit audio sample via the local transmitter
720
Is a new timecode packet available?
722
No
Yes
Store time code sample as escape sequence in next available address in flash card
724
Has user enabled continuous loop record mode?
726
Yes
No
Has transport status changed from record to stop?
728
No
Yes

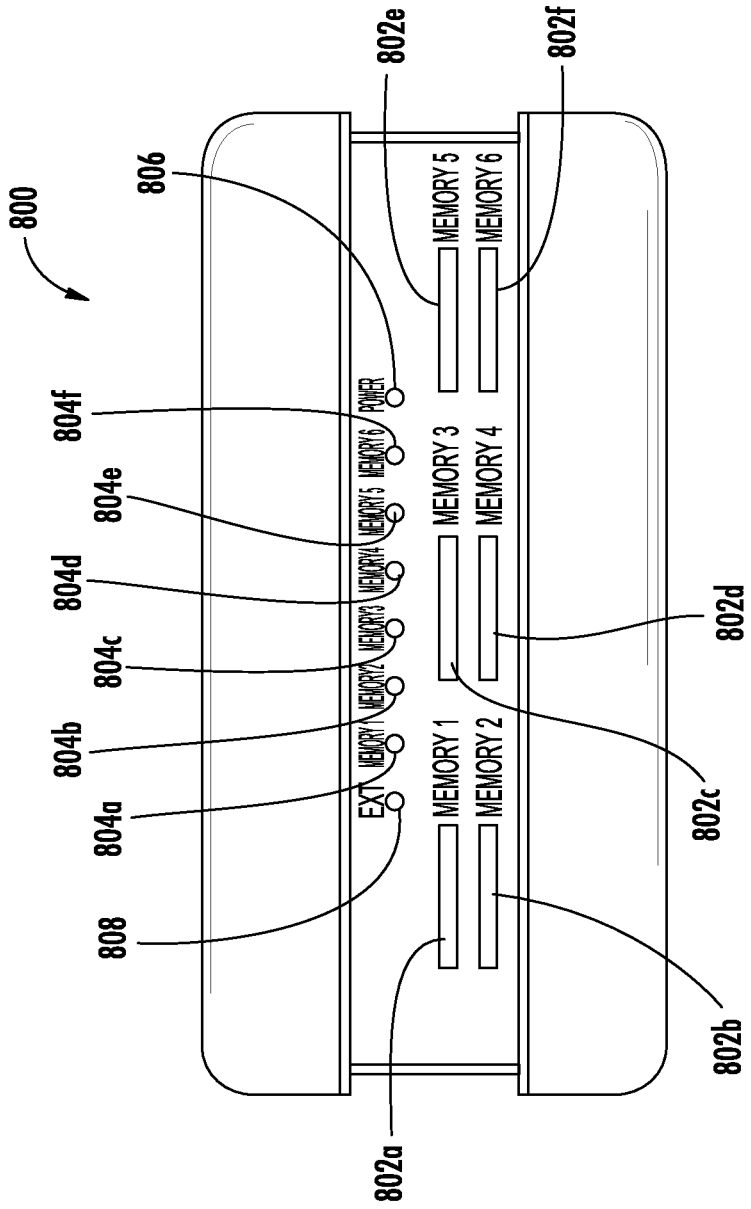

800
806
802e
802f
804f
804e
804d
804c
804b
804a
808
802a
802b
802c
802d
EXT
MEMORY 1
MEMORY 2
MEMORY 3
MEMORY 4
MEMORY 5
MEMORY 6
POWER

FIG. 8

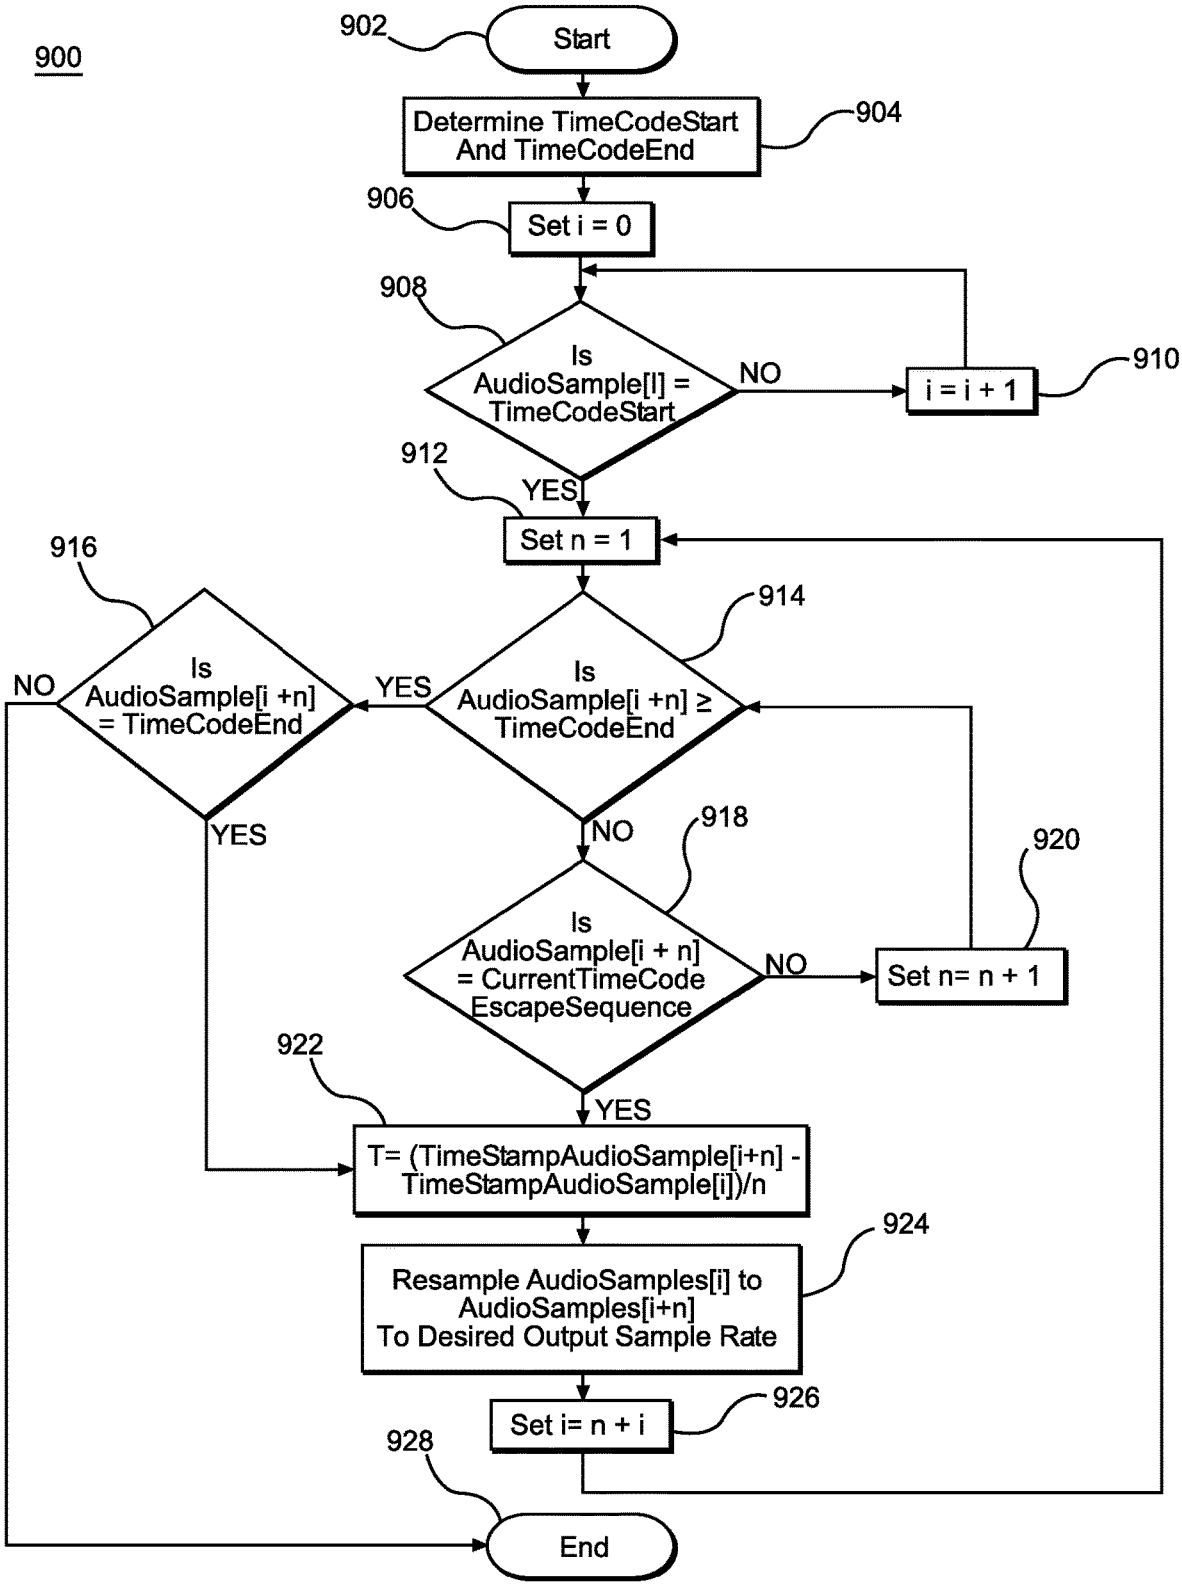
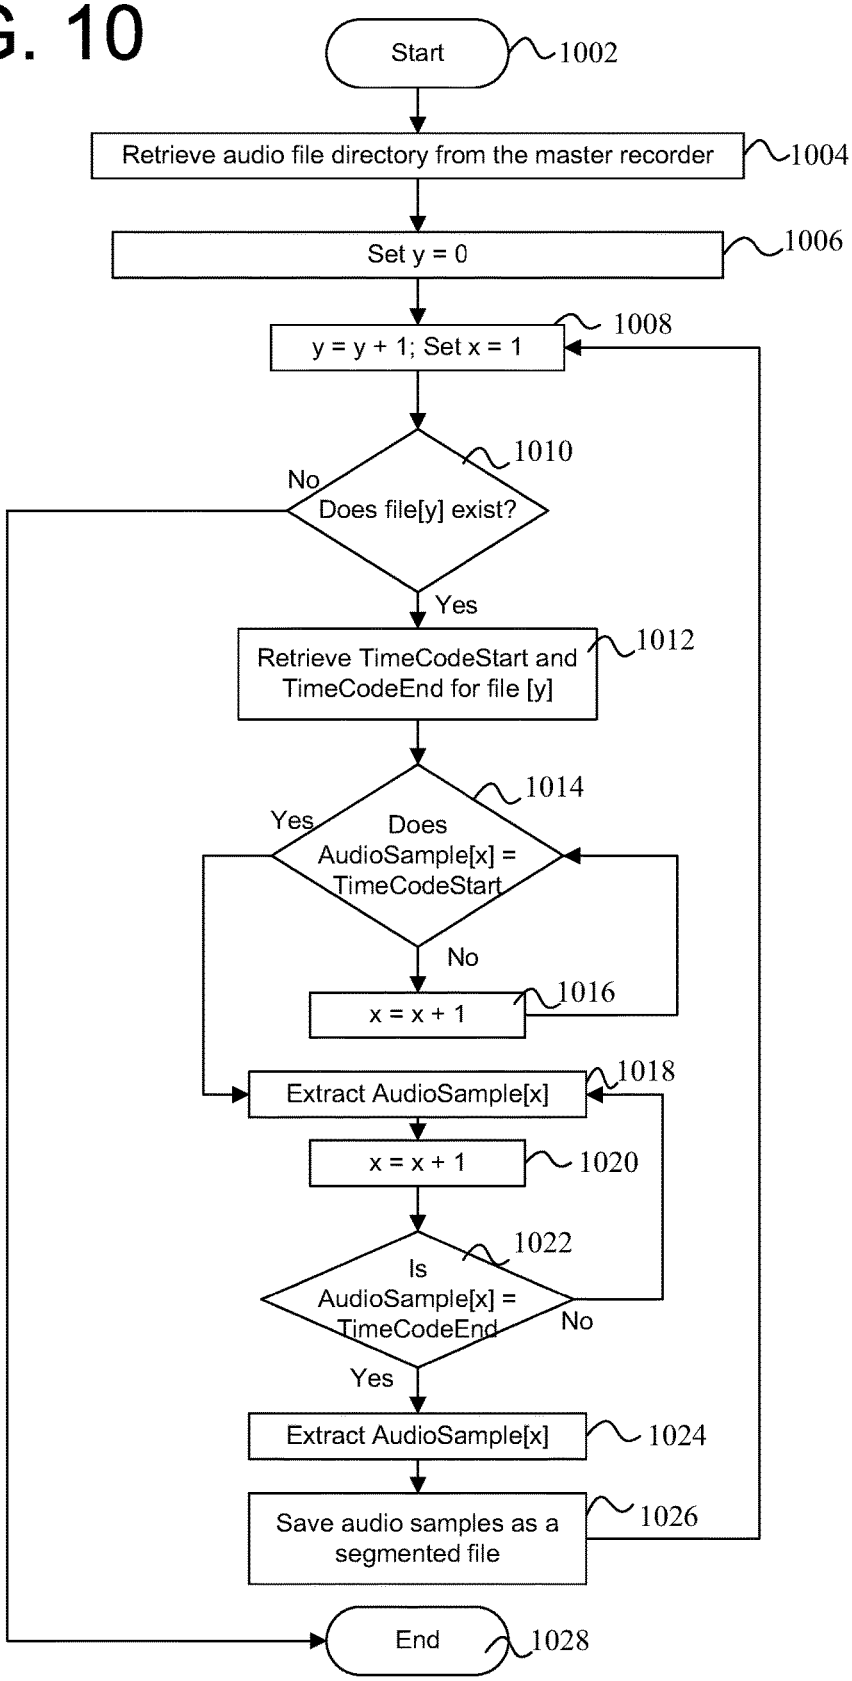

900
902
Start
Determine TimeCodeStart And TimeCodeEnd
904
906
Set i = 0
908
Is AudioSample[I] = TimeCodeStart
NO
i = i + 1
910
912
YES
Set n = 1
916
Is AudioSample[i +n] = TimeCodeEnd
NO
YES
914
Is AudioSample[i +n] ≥ TimeCodeEnd
YES
NO
918
Is AudioSample[i + n] = CurrentTimeCode EscapeSequence
NO
Set n= n + 1
920
922
YES
T= (TimeStampAudioSample[i+n] - TimeStampAudioSample[i])/n
924
Resample AudioSamples[i] to AudioSamples[i+n] To Desired Output Sample Rate
926
Set i= n + i
928
End

FIG. 9

FIG. 10


1000
Start
1002
Retrieve audio file directory from the master recorder
1004
Set y = 0
1006
y = y + 1; Set x = 1
1008
Does file[y] exist?
1010
No
Yes
Retrieve TimeCodeStart and TimeCodeEnd for file [y]
1012
Does AudioSample[x] = TimeCodeStart
1014
Yes
No
x = x + 1
1016
Extract AudioSample[x]
1018
x = x + 1
1020
Is AudioSample[x] = TimeCodeEnd
1022
No
Yes
Extract AudioSample[x]
1024
Save audio samples as a segmented file
1026
End
1028

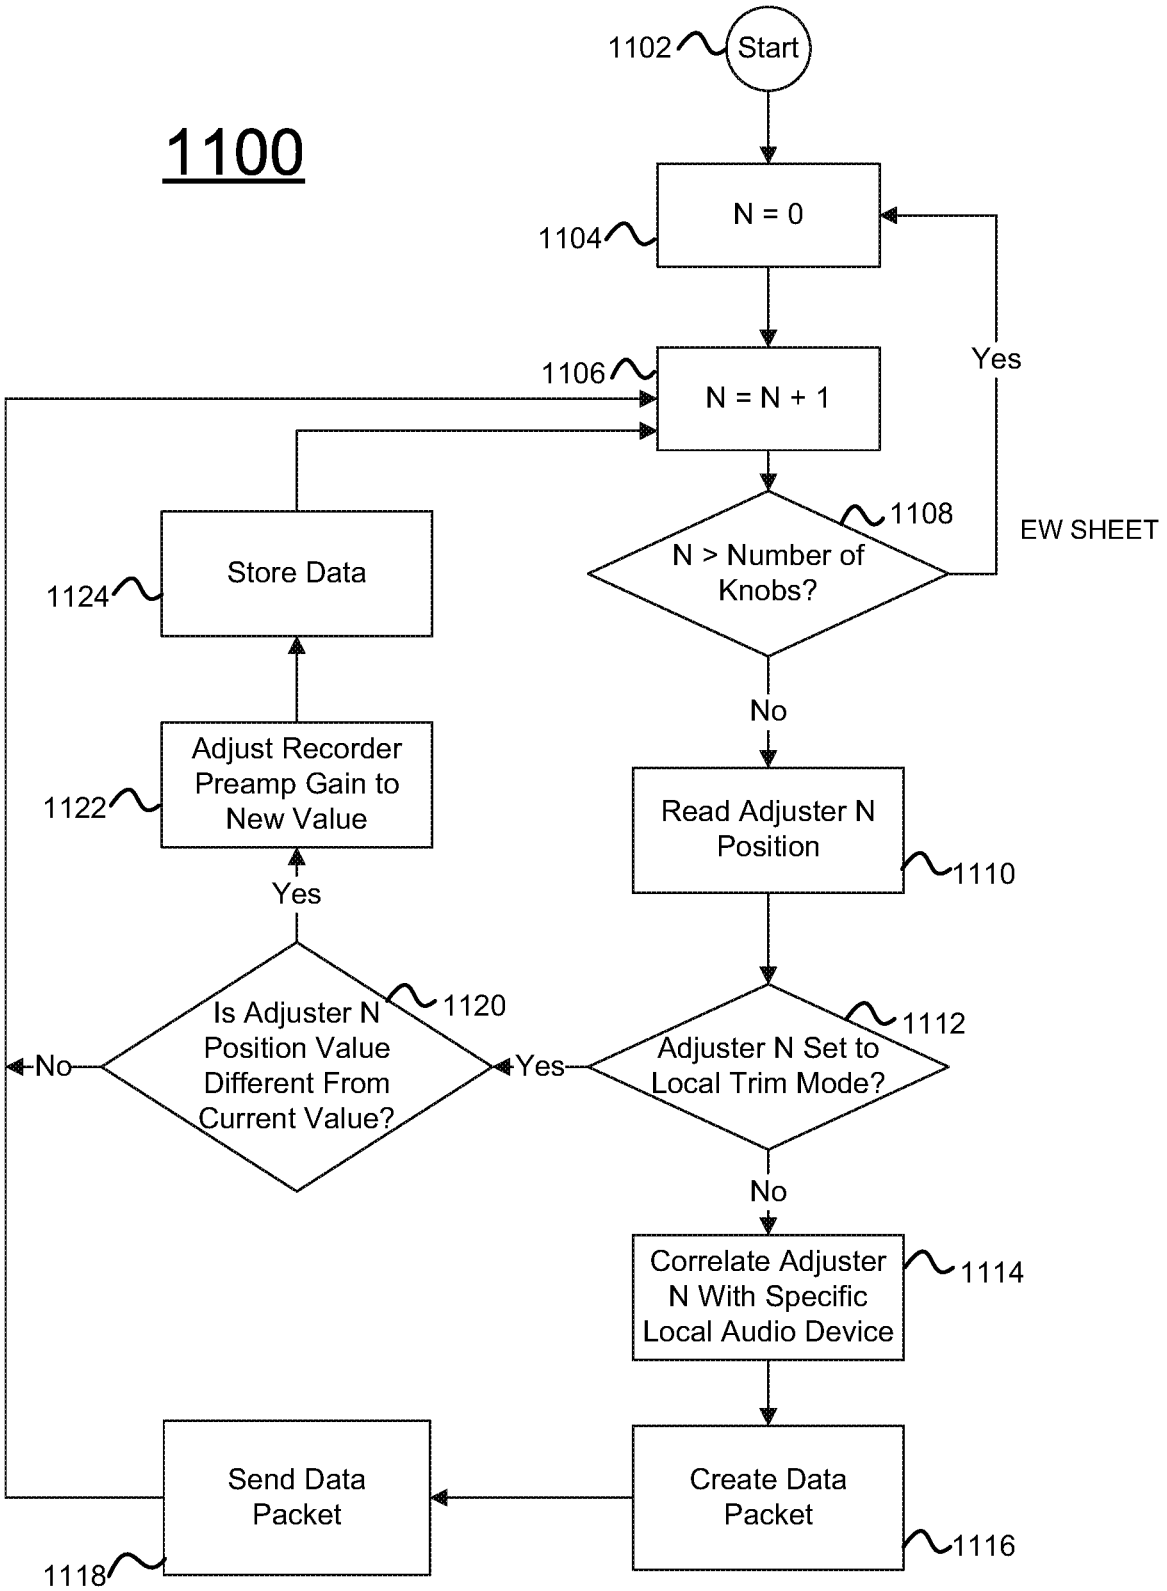

1100
1102
Start
1104
N = 0
1106
N = N + 1
1108
N > Number of Knobs?
Yes
No
EW SHEET
1110
Read Adjuster N Position
1112
Adjuster N Set to Local Trim Mode?
Yes
No
1114
Correlate Adjuster N With Specific Local Audio Device
1116
Create Data Packet
1118
Send Data Packet
1120
Is Adjuster N Position Value Different From Current Value?
No
Yes
1122
Adjust Recorder Preamp Gain to New Value
1124
Store Data

Fig. 11

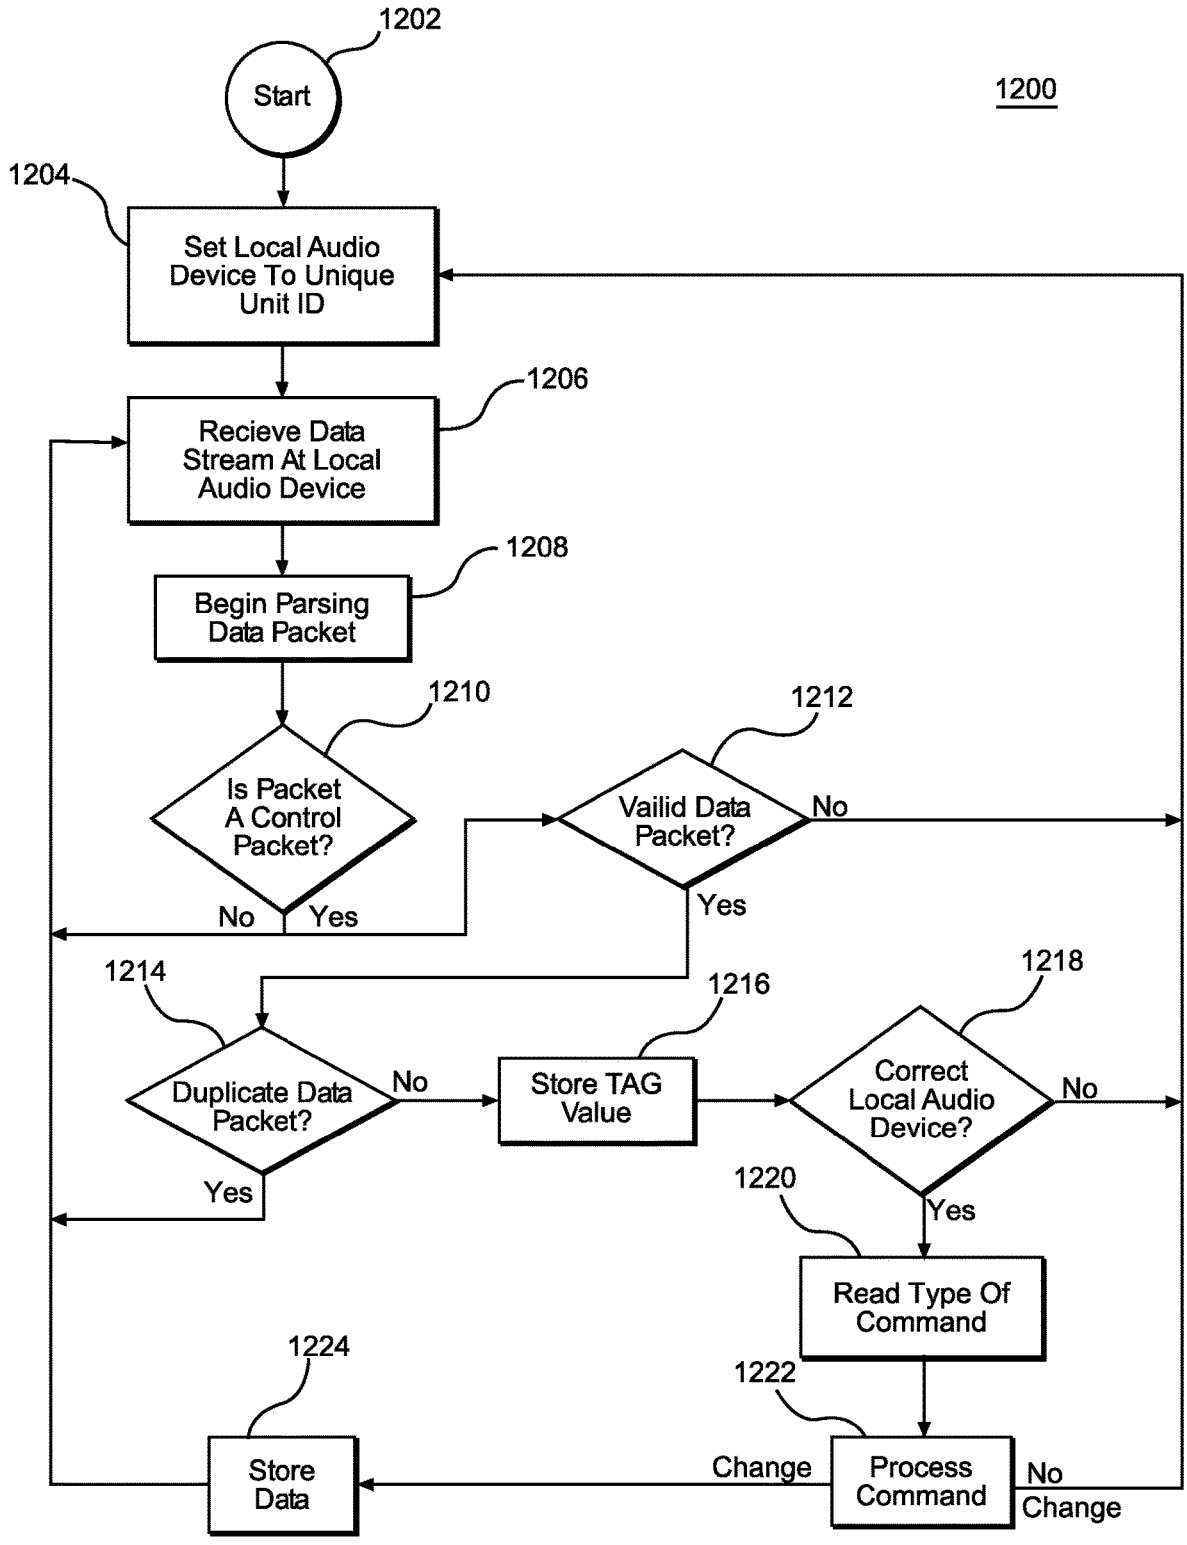

1202
Start
1200
1204
Set Local Audio Device To Unique Unit ID
1206
Recieve Data Stream At Local Audio Device
1208
Begin Parsing Data Packet
1210
Is Packet A Control Packet?
1212
Vailid Data Packet?
No
Yes
No
Yes
1214
Duplicate Data Packet?
No
1216
Store TAG Value
1218
Correct Local Audio Device?
No
Yes
1220
Read Type Of Command
1222
Process Command
Change
No Change
1224
Store Data

Fig. 12

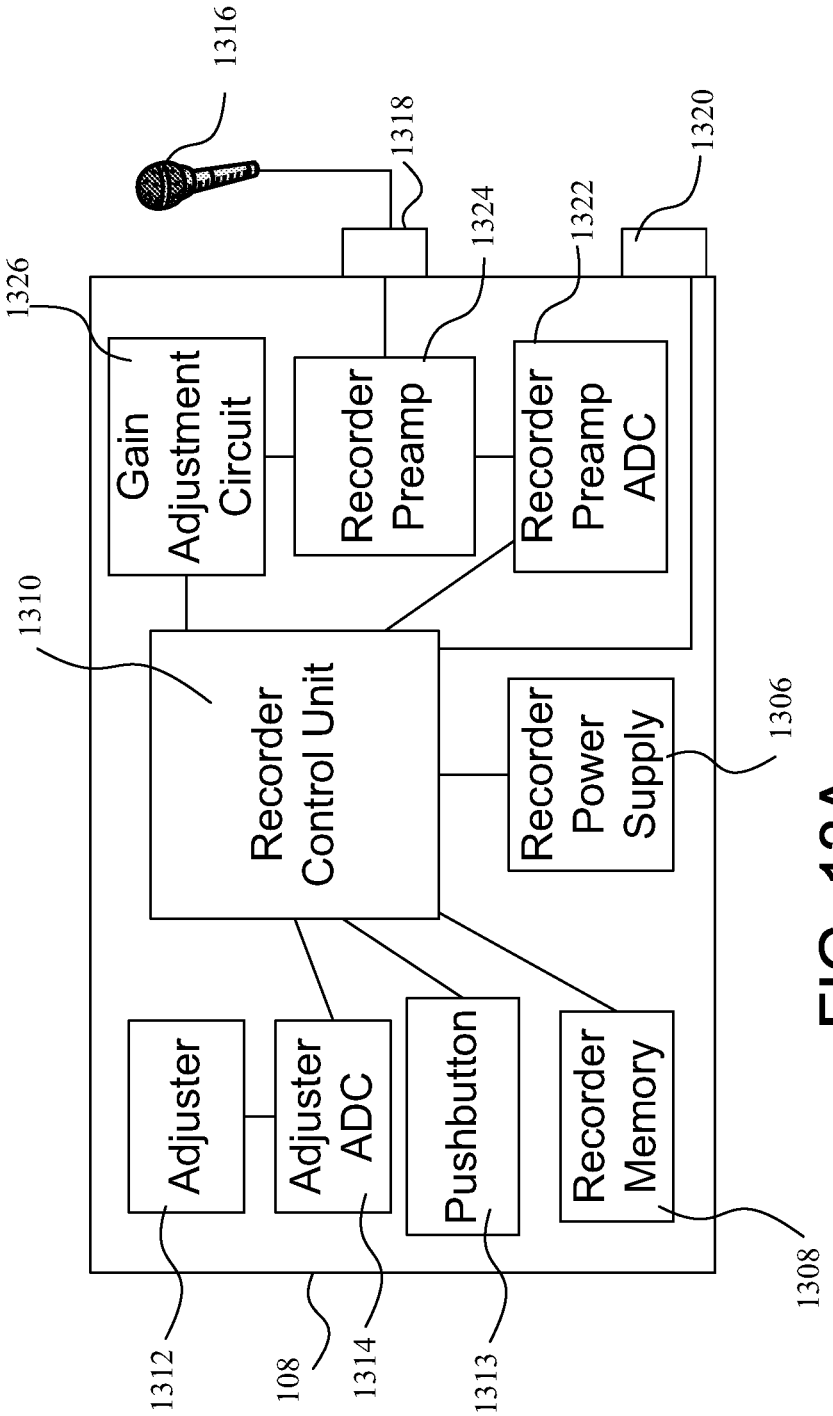
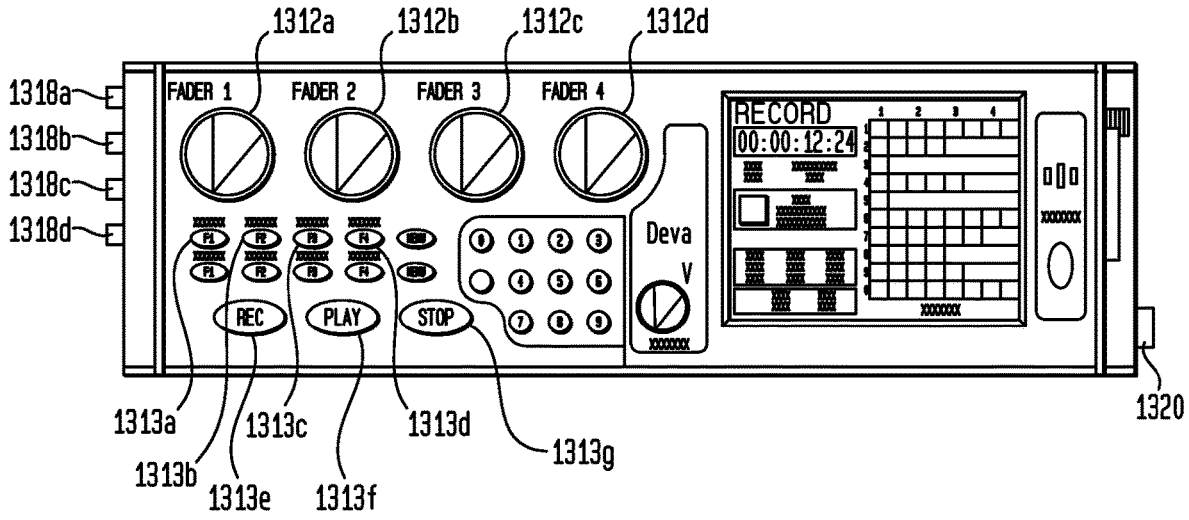

1316
1318
1320
1324
1322
1326
Gain Adjustment Circuit
Recorder Preamp
Recorder Preamp ADC
1310
Recorder Control Unit
Recorder Power Supply
1306
Adjuster
Adjuster ADC
Pushbutton
Recorder Memory
1308
1312
108
1314
1313

FIG. 13A

FIG. 13B


1312a
1312b
1312c
1312d
1318a
1318b
1318c
1318d
FADER 1
FADER 2
FADER 3
FADER 4
RECORD
00:00:12:24
Deva
V
REC
PLAY
STOP
1313a
1313b
1313c
1313d
1313e
1313f
1313g
1320

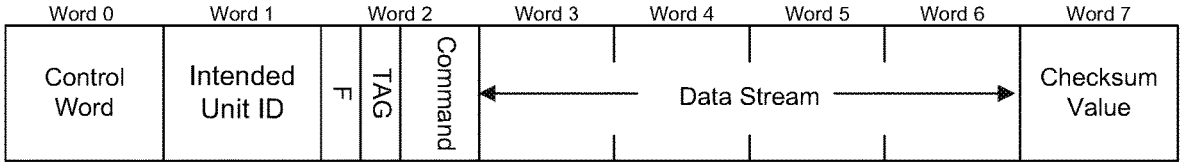
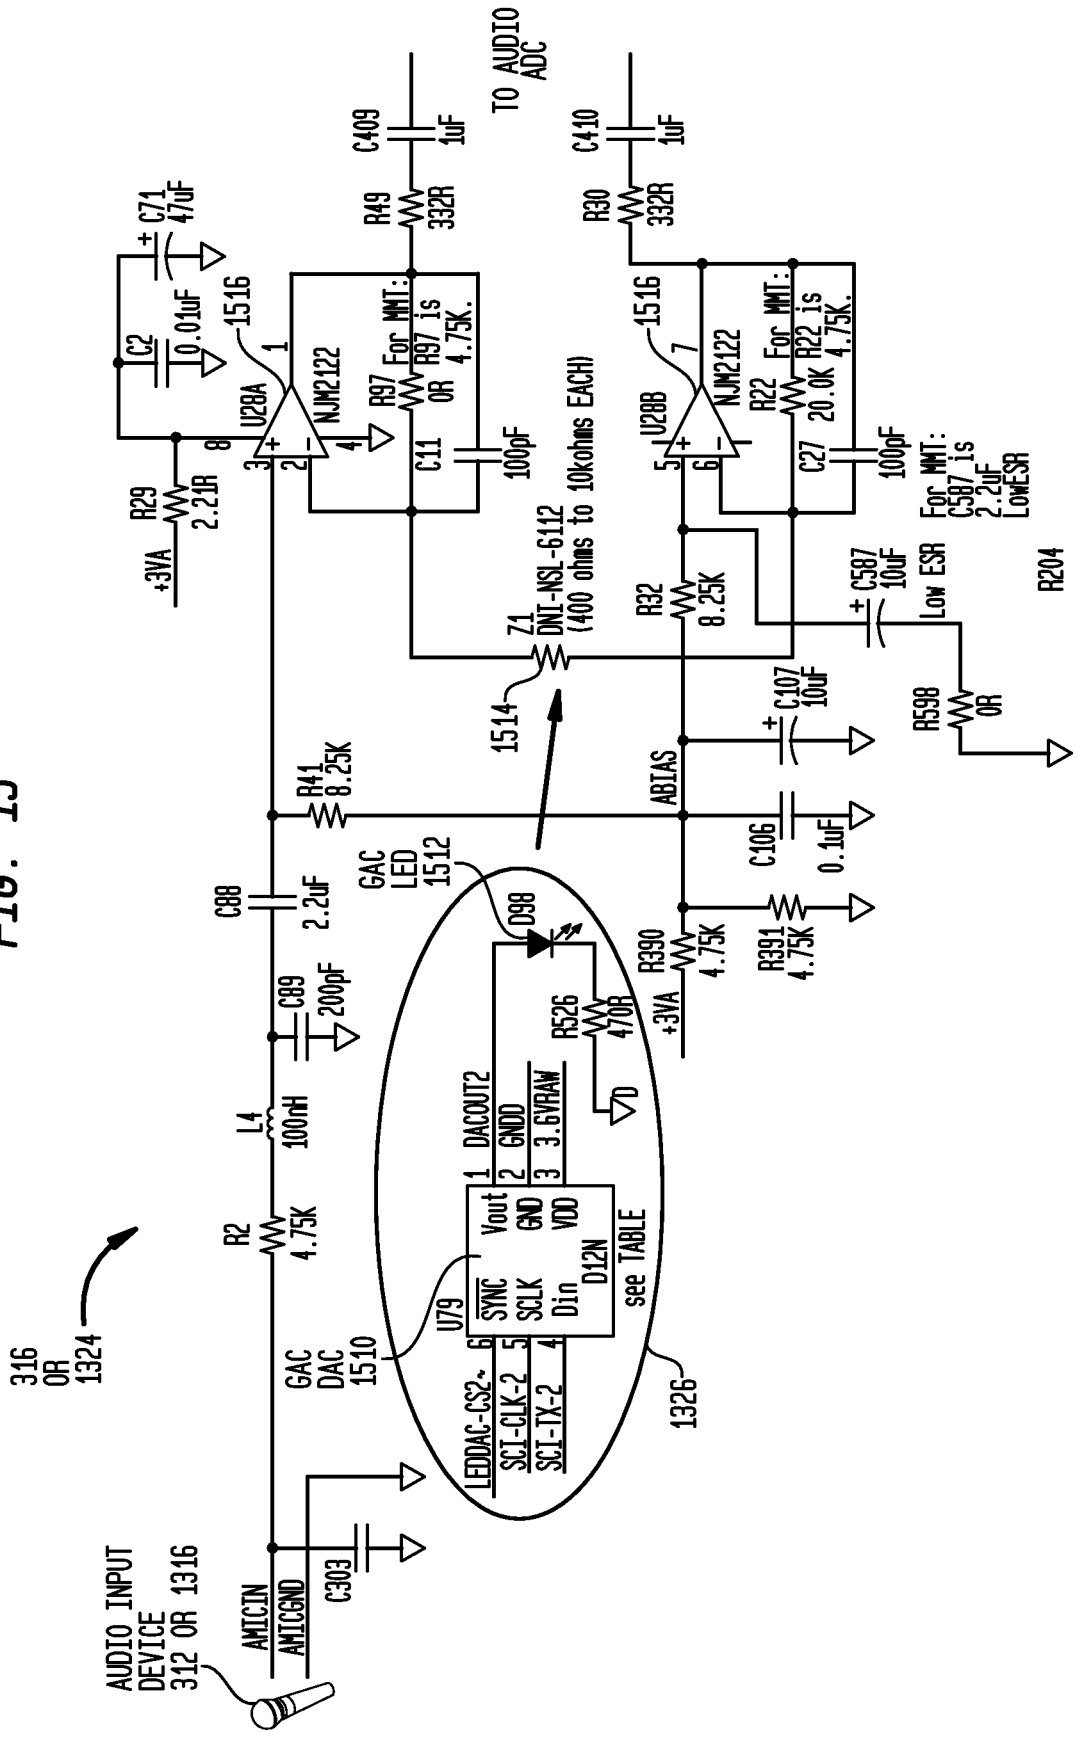

Word 0
Word 1
Word 2
Word 3
Word 4
Word 5
Word 6
Word 7
Control Word
Intended Unit ID
F
TAG
Command
Data Stream
Checksum Value

Fig. 14

FIG. 15


TO AUDIO ADC
C409 1uF
C410 1uF
R49 332R
R30 332R
C71 47uF
C2 0.01uF
1516
U28A NJM2122
U28B NJM2122
R97 For MMT: R97 is 0R 4.75K.
R22 For MMT: R22 is 20.0K 4.75K.
C11 100pF
C27 100pF
For MMT: C587 is 2.2uF LowESR
R29 2.21R
+3VA
Z1 DNI-NSL-6112 (400 ohms to 10kohms EACH)
R32 8.25K
C587 10uF Low ESR
R204
1514
C107 10uF
R598 0R
R41 8.25K
ABIAS
C106 0.1uF
GAC LED 1512
D98
C88 2.2uF
C89 200pF
R390 4.75K
R391 4.75K
+3VA
R526 470R
L4 100nH
R2 4.75K
DACOUT2
GNDD
3.6VRAW
Vout
GND
VDD
D12N
see TABLE
U79
SYNC
SCLK
Din
LEDDAC-CS2-
SCI-CLK-2
SCI-TX-2
316 OR 1324
GAC DAC 1510
1326
C303
AMICIN
AMICGND
AUDIO INPUT DEVICE 312 OR 1316

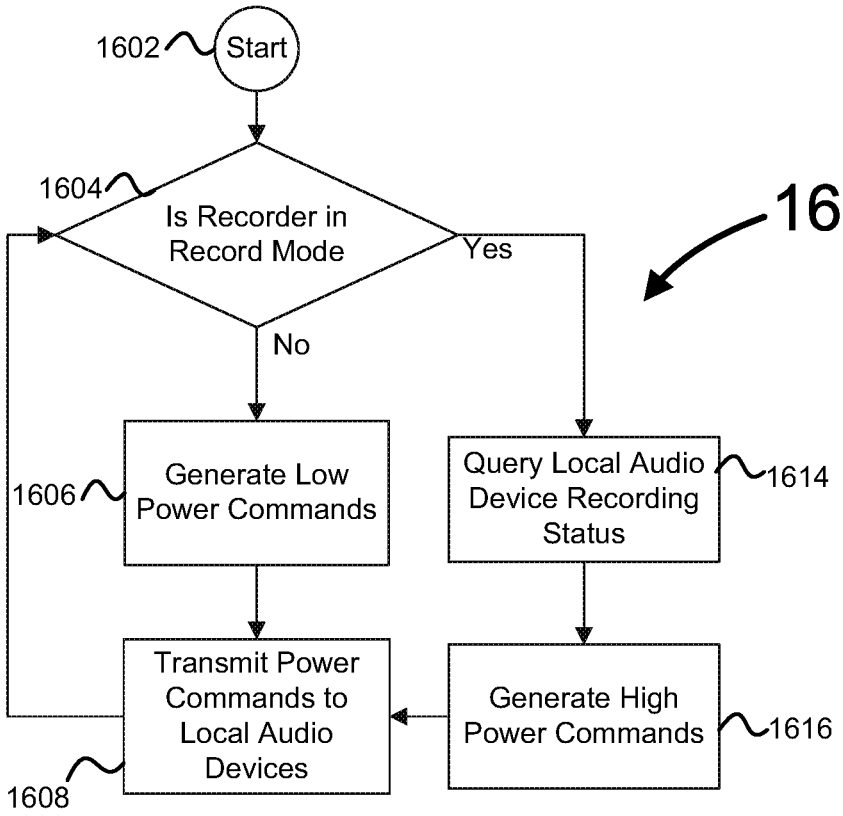

1602
Start
1604
Is Recorder in Record Mode
Yes
No
1600
1606
Generate Low Power Commands
Query Local Audio Device Recording Status
1614
Transmit Power Commands to Local Audio Devices
1608
Generate High Power Commands
1616

Fig. 16

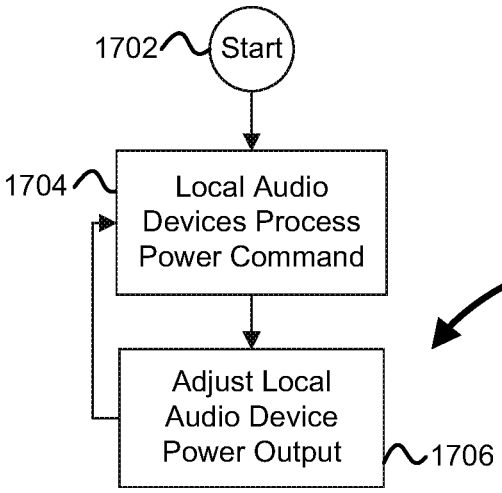
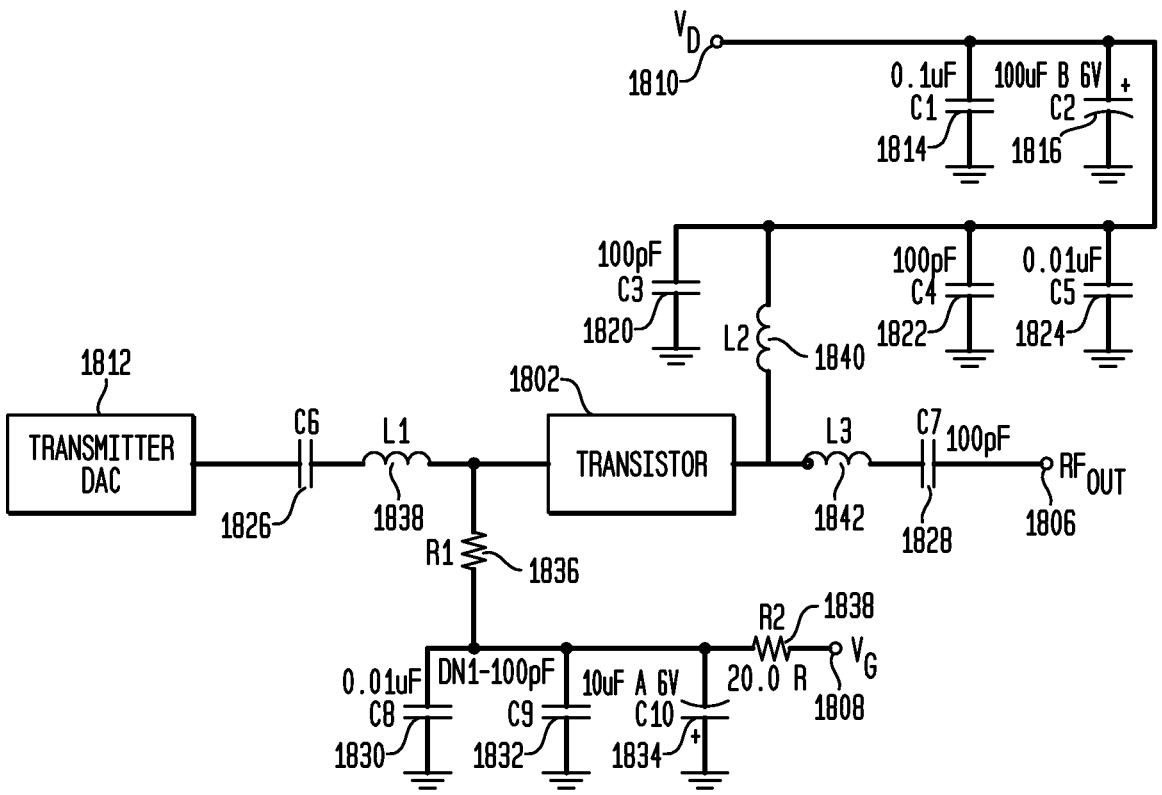

1702
Start
1704
Local Audio Devices Process Power Command
1700
Adjust Local Audio Device Power Output
1706

Fig. 17

FIG. 18


1800
V_D
1810
0.1uF
C1
1814
100uF B 6V
C2
1816
100pF
C3
1820
L2
1840
100pF
C4
1822
0.01uF
C5
1824
1812
TRANSMITTER DAC
C6
1826
L1
1838
1802
TRANSISTOR
L3
1842
C7
100pF
1828
RF_OUT
1806
R1
1836
R2
1838
V_G
1808
0.01uF
C8
1830
DN1-100pF
C9
1832
10uF A 6V
C10
1834
20.0 R

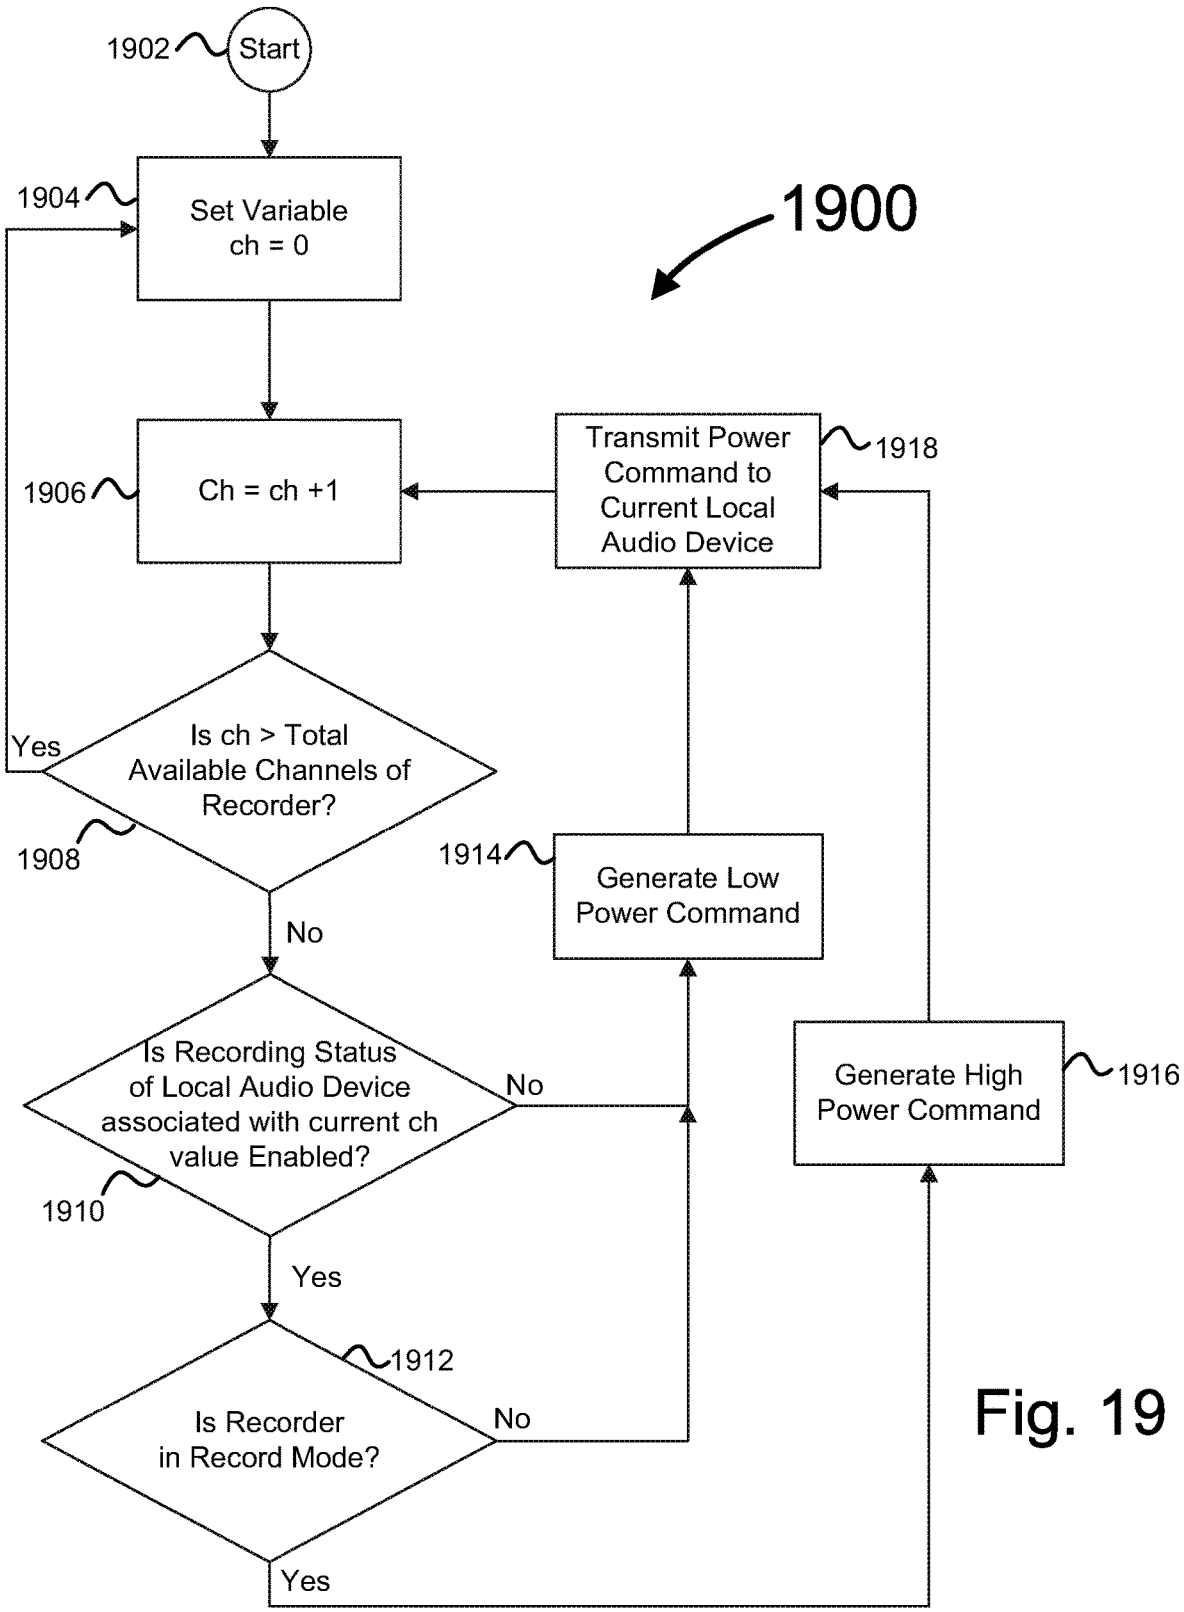

1902
Start
1904
Set Variable
ch = 0
1900
1906
Ch = ch +1
Transmit Power
Command to
Current Local
Audio Device
1918
Yes
Is ch > Total
Available Channels of
Recorder?
1908
1914
Generate Low
Power Command
No
Is Recording Status
of Local Audio Device
associated with current ch
value Enabled?
No
1910
Generate High
Power Command
1916
Yes
1912
Is Recorder
in Record Mode?
No
Yes

Fig. 19

SYSTEMS AND METHODS FOR REPAIRING REMOTELY RECORDED AUDIO DATA

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of and is a continuation of the U.S. patent application entitled "Systems and Methods for Remotely Controlling Local Audio Devices in a Virtual Wireless Multitrack Recording System", having Ser. No. 13/530,040, filed Jun. 21, 2012 and currently pending, which is a continuation-in-part of the U.S. patent application entitled "Systems and Methods for Remotely Controlling Local Audio Devices in a Virtual Wireless Multitrack Recording System", having Ser. No. 12/838,164, filed Jul. 16, 2010, and issued as U.S. Pat. No. 8,842,854, which claims the benefit of and is a continuation-in-part of the U.S. patent application entitled "Virtual Wireless Multitrack Recording System", having Ser. No. 11/404,735, filed Apr. 14, 2006, and issued as U.S. Pat. No. 7,929,902, which claims the benefit of and is a continuation-in-part of the U.S. patent application entitled "Virtual Wireless Multitrack Recording System", having Ser. No. 11/181,062, filed Jul. 14, 2005, and issued as U.S. Pat. No. 7,711,443, all of which are incorporated by reference in their entirety as if fully set forth herein.

COPYRIGHT NOTICE

A portion of the disclosure of this patent document contains material, which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyrights whatsoever.

BACKGROUND OF THE INVENTION

Embodiments of the present invention generally relate to systems and methods for recording and processing audio received from one or more wireless devices. More specifically, the present invention relates to systems and methods for recording and processing audio having one or more tracks received from one or more wireless devices operating in either an asynchronous or synchronous mode.

Many systems and methods have been created to record performance audio. Some such systems include a multi-track audio recorder wired to one or more microphones. Typically, one or more performers performing on a sound stage are recorded by one or more microphones that are directly wired to the multi-track recorder. The multi-track recorder combines the single track of audio received from each microphone to create one multi-track audio file. In many such systems, the received audio and/or the multi-track audio is timestamped with a time reference signal such as a Society of Motion Picture and Television Engineers ("SMPTE") timecode signal containing information regarding the hour, minute, second, frame, type oftimecode (i.e., nondrop or drop frame), and user-definable information. Such information allows audio to be more easily matched and/or combined with simultaneously recorded video.

Other such systems include a multi-track audio recorder and an associated audio receiver that receive audio wirelessly from one or more wireless transmitters. Such wireless transmitters may take the form of body packs that are worn by each performer. Typically, the audio receiver receives each performer's audio from the performer's respective body pack via an analog or digital wireless transmission and transmits it to the audio recorder. The audio recorder then combines the wireless transmissions received from all body packs to create one multi-track audiofile.

Due to the occurrence of wireless transmission errors such as dropouts, some existing wireless systems include audio receivers having two or more redundant receiver circuits. The incorporation of additional, redundant receiver circuits provides a better opportunity to avoid missed audio transmissions. For example, the use of two receiver circuits may allow a second receiver to receive audio that may have not been received by a first receiver circuit and vice versa. However, although such redundancy accounts may correct wireless transmission errors, such redundancy does not prevent loss of data due to interference (i.e., a distortion of the received audio signal due to receipt of multiple wireless signals). Upon the occurrence of interfering signals, audio created during a performance (e.g., alive performance) may simply be lost due to the inability of the receiver to receive a clean audio signal.

Typically, the quality of audio recorded by an audio recording device is modified within the audio recorder. That is, a user of the audio recorder listens to the received audio and makes various adjustments to the audio recording circuitry to improve the quality thereof. One such adjustment is gain, or amplification, of the received audio. In some such systems, the change in gain or amplification of the audio is made by modifying one or more amplification circuits located in the audio recorder, and these adjustments may be made locally at the audio recorder via knobs, slides, and the like.

BRIEF SUMMARY OF THE INVENTION

Disclosed is a method of dynamically adjusting the power level of at least one local audio device including the steps of: querying a record status of a recorder; generating a power command based upon the record status; transmitting the power command to at least one local audio device; processing of the power command by the at least one local audio device; adjusting at least one local audio device parameter, the parameter selected from the group consisting of RF transmitter bias voltage, RF transmitter source voltage, RF drive levels, and combinations thereof.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

The foregoing summary, as well as the following detailed description of preferred embodiments of the invention, will be better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, there are shown in the drawings embodiments that are presently preferred. It should be understood, however, that the invention is not limited to the precise arrangements and instrumentalities shown. In the drawings:

FIG. **1** depicts the components of a recording system in accordance with one embodiment of the present invention including, inter alia, local audio devices, a remote control unit, a receiver, a recorder, and a mixer;

FIG. **2**A depicts a block diagram of the internal components of a remote control unit in accordance with one embodiment of the present invention;

FIG. **2**B depicts an external, front view of a remote control unit in accordance with one embodiment of the present invention;

FIG. **3**A depicts a block diagram of the internal components of a local audio device in accordance with one embodiment of the present invention;

FIG. **3**B depicts an external, front view of a local audio device in accordance with one embodiment of the present invention;

FIGS. **4**A and **4**B depict a process for operation of a recording system in a synchronous timecode generator mode in accordance with one embodiment of the present invention;

FIG. **5** depicts a process for modifying the speed of a local timecode generator as necessary to maintain its synchronization with a master timecode generator in accordance with one embodiment of the present invention;

FIG. **6** depicts a process for recording audio and for replaying and re-recording segments of missed audio in accordance with one embodiment of the present invention;

FIG. **7** depicts a process for operation of a recording system in asynchronous timecode generator mode in accordance with one embodiment of the present invention;

FIG. **8** depicts an external view of a multi-memory unit in accordance with one embodiment of the present invention;

FIG. **9** depicts a process for interpolating timestamps for unstamped audio samples based upon the timestamps of stamped audio samples, and resampling the audio samples to include the interpolated timestamps in accordance with one embodiment of the present invention;

FIG. **10** depicts a process for segmenting a single large audio file into multiple smaller files that correlate to a master directory of files in accordance with one embodiment of the present invention;

FIG. **11** depicts a process for generating commands at a recorder;

FIG. **12** depicts a process for receiving commands at one or more local audio devices;

FIG. **13**A depicts a block diagram of the internal components of a recorder in accordance with one embodiment of the present invention;

FIG. **13**B depicts an external, front view of an exemplary recorder in accordance with one embodiment of the present invention;

FIG. **14** depicts an exemplary format of a data packet in accordance with one embodiment of the present invention;

FIG. **15** depicts exemplary gain adjustment and preamplifier circuit diagrams;

FIG. **16** depicts a process for automatically creating and transmitting high and low power commands used to adjust the power output of one or more local audio devices;

FIG. **17** depicts a process for receiving and processing a low or high power command at a local audio device;

FIG. **18** depicts an exemplary transmitter amplification circuit for use with the processes of FIGS. **16** and **17**; and

FIG. **19** depicts a process for automatically creating and transmitting high and low power commands used to adjust the power output of one or more local audio devices in accordance with an alternate embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring first to FIG. **1**, depicted is recording system **100** in accordance with one embodiment of the present invention. Recording system **100** wirelessly records audio events, such as performances, movie takes, etc. having one or more performers. In one aspect of the present invention, all of the components of recording system **100** are synchronized to allow each component to accurately stamp its recorded audio with the time at which it occurred such that the timestamps (i.e., information stored with an audio sample or audio file conveying the time at which the audio sample or first audio sample of the file occurred) created by each individual component of recording system **100** are highly accurate as compared to the timestamps created by all other components of recording system **100**. This accuracy allows multiple individually recorded audio tracks to be combined into one or more multi-track audio files electronically post-recording. Furthermore, this accuracy allows recording system **100** to automatically correct for any audio data lost during an original recording due to wireless transmission problems such as dropout, interference, etc. This automatic correction may be performed either electronically or via synchronized playback of the individually recorded audio tracks. In another aspect of the present invention, the audio recorded by recording system **100** may be recorded asynchronously. In this scenario, the audio is synchronized and/or mixed post-recording to automatically correct for any audio data lost due to wireless transmission problems such as dropout, interference, etc.

In the embodiment of the present invention depicted in FIG. **1**, recording system **100** includes local audio devices **102**, remote control unit ("RCU") **104**, receiver **106**, and recorder **108**. In one embodiment, RCU **104** includes an RF transmitter capable of transmitting one or more of a time reference signal, digital commands, and audio to one or more other components of recording system **100**. Additionally, RCU **104** may be equipped with the capability of remotely controlling local audio devices **102**, receiver **106**, and recorder **108** to perform tasks including, but not limited to, initiating audio playback of all local audio devices **102** starting at the same time reference, as well as recording thereof by receiver **106** and recorder **108**.

Both live and replayed audio transmitted by local audio devices **102** may be received at receiver **106** and recorded by audio recorder **108**. Receiver **106** and recorder **108** may be virtually any commercially available receiver and recorder. Receiver **106** receives the wireless RF signals (e.g., modulated RF carrier signals) generated by all active local audio devices **102** and converts the signals to a format capable of being recorded by a commercially available recording device including, but not limited to, Zaxcom, Inc.'s DEVA® multi-track recorder. In some embodiments, such commercially available recording devices record audio with a locally generated SMPTE-compatible timecode signal.

The ability to synchronize the local timestamps at each local audio device **102** and recorder **108** using the methods of the present invention as discussed in greater detail below allows any audio that is not recorded by recorder **108** during an event due to transmission errors to be recovered by replaying the missed audio and recording the replayed audio in the correct time sequence with respect to the other audio samples. In other words, since the audio samples are stored locally in each local audio device **102** with timestamps that are synchronized with the timestamps of recorder **108**, whenever audio is not recorded at recorder **108**, it may simply be replayed at local audio devices **102** starting at the timecode of the missed audio. Since the local audio device and recorder timestamps are synchronized, the replayed audio may be inserted in the proper time sequence with respect to the other recorded audio samples based upon the synchronized timestamp data. Synchronization is essential to ensure that each performer's audio is synchronized with all other performers' audio and to ensure that the newly recorded replayed audio is in the correct sequence with

respect to the previously recorded live audio. Such synchronization must maintain a high accuracy for each performer's timestamps with respect to all other performers' timestamps to prevent the occurrence of phasing artifacts when the multiple audio recordings are combined to create one single recording.

In some embodiments of the present invention, receiver **106** automatically senses an error in transmission caused by, for example, a communication loss, interference, etc. In some embodiments of the present invention, the error in transmission is sensed by comparing a calculated checksum to the transmitted checksum to determine if data was lost during transmission. An error is determined if the calculated and transmitted checksums do not match. Upon sensing a transmission error, receiver **106** may transmit a request to RCU **104** requesting playback of the audio recorded locally on local audio devices **102** beginning at a timecode prior to the occurrence of the transmission error. In response, RCU **104** transmits a digital command to all local audio devices **102** to playback the audio stored in the respective memory **332** (FIG. **3**) that occurred subsequent to the timecode requested by receiver **106** in the manner described below with respect to FIG. **6**.

Alternatively, playback may be requested manually by a user of a recording system such as recording system **100**. In this scenario, upon hearing that a transmission error (i.e., a loss of audio data) has occurred, the user manually prompts RCU **104** to transmit a digital command to all local audio devices **102** to playback the audio stored in memory **332** (FIG. **3**) that occurred subsequent to a time reference entered at RCU **104** by the user. Such prompting may occur after the audio event ends or immediately upon hearing the transmission error. If the latter option is chosen, prompting playback of a specific segment of the audio event may index the local audio devices to store the requested data in a protected memory location until the end of the audio event to avoid disrupting the recording. In this scenario, all requested audio shall be replayed after the performance ends. In embodiments of the present invention in which data is recorded in a loop (i.e., when memory is full, new data overwrites previously recorded data), writing the data to a protected memory location removes it from the loop and protects it from being overwritten.

FIG. **2**A depicts a block diagram of one embodiment of RCU **104** in accordance with the present invention. In this embodiment, RCU **104** includes, inter alia, RCU timecode generator **204**, RCU power supply **206**, RCU transmitter **208**, RCU local control unit **210**, RCU audio input device **212**, RCU audio input device port **214**, RCU preamp **216**, RCU display **218**, RCU keypad **220**, RCU ADC **222**, RCU amp **226**, timecode input port **228**, external interface **252**, and external interface port **254**.

RCU transmitter **208** allows RCU **104** to transmit a master time reference signal, digital commands, audio, and the like to other devices such as local audio devices **102**, receiver **106**, and recorder **108**. In one aspect of the present invention, the time reference signal is a SMPTE timecode signal containing information regarding the hour, minute, second, frame, type of timecode (i.e., nondrop or drop frame), and user-definable information (e.g., the transport status of recorder **108**, the name of a scene, the name of a take, a local audio device identifier that identifies the local audio device that recorded the respective audio, a track identifier that identifies the track of audio which may include the actor or actress recording the respective audio, etc.). This master time reference signal provides a time reference for all local audio devices **102**, which may use this information for a variety of purposes such as jam synchronizing their respective local timecode generators **304** (FIG. **3**A), adjusting the speed of the local timecode generators **304** (FIG. **3**A), timestamping locally recorded audio, etc. The master time reference signal may be generated on board remote control unit **104** via a mechanism such as RCU timecode generator **204**. Or, alternatively, the master time reference signal may be generated by an independent timecode generator that transmits timecodes to remote control unit **104** wirelessly or via a cable or the like connected from the independent timecode generator to timecode input port **228**. In the latter scenario, the timecodes received via timecode input port **228** are buffered and/or amplified by RCU amp **226** prior to transmission to RCU local control unit **210**.

When recording system **100** is operating in a synchronous mode, transmission of the master time reference signal ensures that all of the components of recording system **100** store all locally recorded audio with timestamps that are highly accurate as compared to the timestamps of all other local audio devices **102** and/or all other components of recording system **100**. The timestamps are then used during playback and recording to ensure that the replayed audio from all local audio devices **102** is synchronized with previously recorded audio and with the audio replayed by all other local audio devices **102**. In contrast, when recording system **100** is operating in an asynchronous mode, transmission of the master time reference signal allows the files containing recorded audio to be timestamped with the master time reference information to allow the recorded audio to be accurately synchronized post-recording.

RCU transmitter **208** also allows audio generated locally at RCU **104** to be transmitted to the other components of recording system **100**. Such audio may be received from an audio input device such as RCU audio input device **212** via audio input device port **214**. RCU audio input device **212** may be any type of commercially available audio input device such as a microphone and audio input device port **214** may be any commercially available audio input device port that is compatible with RCU audio input device **212** and the internal components of RCU **104**. The received audio as well as any digital signals (e.g., microphone input level, line input level, etc.) are then buffered and/or amplified by RCU preamp **216** and are converted from analog to digital by RCU analog to digital converter ("ADC") **222** such that the audio may be read in digital form by RCU local control unit **210**. This audio may then be processed and sent via RCU transmitter **208** in either analog or digital form. If the audio is to be sent in analog form, RCU local control unit **210** may be equipped with an on-board digital to analog converter ("DAC") or an independent DAC may be incorporated in RCU **104** without departing from the scope of the present invention. Or, alternatively, analog audio received from RCU audio input device **212** may be passed directly to RCU transmitter **208** for transmission in analog form to the other components of the recording system. In such embodiments, RCU transmitter **208** may be equipped with a frequency modulation ("FM") modulator or the like. Furthermore, in such embodiments, although the analog audio is passed through to RCU transmitter **208**, the audio signal may be additionally converted to digital form for local recording of the received audio. In yet another alternate embodiment, audio may be transmitted and recorded in analog form thereby eliminating RCU ADC **222**.

In the aforementioned embodiments in which the audio signal for a particular track of audio is converted to digital form for local recording of the received audio, identifiers such as a local audio device identifier that identifies the local

audio device that recorded the respective audio, a track identifier that identifies the track of audio which may include the actor or actress recording the respective audio, etc. may be recorded with the recorded audio to allow the audio tracks to be easily and quickly identified post-recording and/or post-production. In some embodiments of the present invention, such identification information is stored in the local, nonvolatile memory of the local audio device as a text file, however, the present invention is not so limited. In another aspect of the present invention, such identification information is encoded in the audio file such that it may be decoded post-recording and/or post-production using methods known in the art. Additionally, such identification information may be integral to a timecode or completely distinct therefrom. Furthermore, such identification information may be programmed for each local audio device remotely via a remote control unit such as RCU **104**.

In some embodiments of the present invention, RCU local control unit **210** may be a digital signal processor such as Texas Instruments part number TMS320C5509A. However, the present invention is not so limited. Any combination of hardware and software may be substituted for any component described herein without departing from the scope of the present invention.

RCUs **104** may be handheld units such as RCU **104** depicted in FIG. **2**B. In such an embodiment, display **218** may be a small liquid crystal display ("LCD") or the like and keypad **220** may include a plurality of buttons that allow a user to perform local RCU functions including, but not limited to, those that relate to RCU transmitter frequency, group identification ("ID") code, unit ID code, and timecode generator mode. For example, the RCU transmitter frequency may be adjustable in predetermined frequency steps. In most cases, this frequency will be set to match the receiving frequency of other devices in the recording system (e.g., local audio devices). Or, when multiple local audio devices are incorporated into a group with an RCU, the RCU as well as other components of the recording system (e.g., local audio devices) may be assigned a group ID to ensure that the RCU is controlling the correct group of local audio devices. Similarly, the unit ID identifies the specific one of multiple local audio devices that a user wishes to control. Setting the unit ID ensures that the control signals transmitted by the RCU are received by the correct local audio device. Also, timecode generator mode allows the RCU to either generate its own timecodes or to receive timecodes from an external timecode generator.

In addition to allowing a user to modify local RCU settings, RCU keypad **220** and display **218** also allow the RCU to remotely control individual local audio devices. The user may perform a variety of functions for the local audio device including, but not limited to, transmitter and receiver frequencies, transmitter enable, microphone gain, high pass filter, record mode select, time code entry, playback control, audio bank storage, and status request.

For example, local audio device transmitter and receiver frequencies may be adjustable in predetermined frequency steps. Alternatively, the local audio device transmitter may be remotely enabled and disabled. Microphone gain may be adjusted, which in turn adjusts the current setting of a preamp such as local preamp **316**. Adjustment of the high pass filter may be incorporated to enable and disable, or otherwise adjust, the high pass audio filter of the audio input device such as audio input device **312**.

In addition, record mode select allows recording modes such as endless loop record mode or timed record mode to be remotely adjusted. Timecodes may also be set remotely for each local audio device. Playback control allows one or more local audio devices to be commanded remotely to playback audio starting at a specific timecode. Completion of playback may be automatically or manually determined. Functions such as audio bank storage allow a remote user to manually store chunks of audio data in safe locations of the local audio device memory (i.e., in locations in which the audio data will not be overwritten). Finally, status of the local audio device may be requested. The status may be provided via display **218** or via spoken language generated by local audio device **102** and transmitted to a receiver or receiver/recorder combination for recording with the recorded audio.

The RCU may also allow a user to program data at each local audio device such as track identifiers, local audio device identifiers, and the like. In such scenarios, such identifiers are recorded with the respective audio to allow the track, local audio device, etc. of the recorded audio to be identified post-recording. That is, each segment of recorded audio may be associated with a specific take, track, or the like, as well as a specific local audio device. Such association allows each portion of recorded audio (e.g., a track of audio) to be quickly and easily identified post-production and/or post-recording without confusion.

Although many specific features and functions for the RCU have been delineated herein, other features and functions may be added or eliminated without departing from the scope of the present invention.

Additionally, handheld embodiments may include any one of a variety of commercially available batteries to function with the power supply **206** without departing from the scope of the present invention. Power supply **206** may be virtually any power component or combination thereof that is compatible with the other components of RCU **104** including, but not limited to, a Texas Instruments TPS62000DGS Power Module alone or in combination with a Linear Technology LTC3402 Synchronous Boost Converter.

However, non-handheld embodiments of RCU **104** are also envisioned such as tabletop models, personal computer ("PC") models, etc. Also, RCU **104** may be optionally equipped with external interface **252** (FIG. **2**A) to facilitate connection of RCU **104** to a PC, laptop PC, dumb terminal, or the like via external interface port **254**. Such an interface allows a user to control the components of recording system **100** via a graphical user interface or other software that may operate on a larger user interface. Such an interface may provide more features and functions than that available on a portable, handheld device such as programming and execution of complex playback scenarios, automatic initiation of complex playback scenarios based upon detected audio transmission errors, etc.

Turning next to FIG. **3**A, depicted is a block diagram of one embodiment of local audio device **102** in accordance with the present invention. In one aspect of the present invention, local audio devices **102** are digital, wireless audio transceivers. Such audio devices may be manufactured in the form of body-packs, such as those typically worn by news announcers, performers, and the like. In the depicted embodiment, local audio device **102** includes, inter alia, local receiver **302**, local timecode generator **304**, local power supply **306**, local transmitter **308**, local control unit **310**, local audio input device **312**, local audio input device port **314**, local preamp **316**, local display **318**, local keypad **320**, local ADC **322**, local DAC **324**, local amp **326**, local

audio output device port **328**, local audio output device **330**, memory **332**, comparator **334**, oscillator **336**, and counter **338**.

Local transmitter **308** also allows audio generated locally at local audio device **102** to be transmitted to the other components of recording system **100**. Such audio may be received from an audio input device such as local audio input device **312** via local audio input device port **314**. Local audio input device **312** may be any type of commercially available audio input device such as a microphone and local audio input device port **314** may be any commercially available audio input device port that is compatible with local audio input device **312** and the internal components of local audio device **102**. The received audio as well as any digital signals (e.g., microphone input level, line input level, etc.) are then buffered and/or amplified by local preamp **316** and are converted from analog to digital by local ADC **322** such that the audio may be read in digital form by local control unit **310**. This audio may then be processed and sent via local transmitter **308** in either analog or digital form. If the audio is to be sent in analog form, local control unit **310** may be equipped with an on-board DAC or an independent DAC may be incorporated in local audio device **102** without departing from the scope of the present invention. Or, alternatively, analog audio received from local audio input device **312** may be passed directly to local transmitter **308** for transmission in analog form to the other components of the recording system. In such embodiments, local transmitter **308** may be equipped with a frequency modulation ("FM") modulator or the like. Furthermore, in such embodiments, although the analog audio is passed through to local transmitter **308**, the audio signal may be additionally converted to digital form for local recording of the received audio. In yet another alternate embodiment, audio may be transmitted and recorded in analog form thereby eliminating local ADC **322**.

The gain of audio received from audio input device **312** via audio input device port **314** may be adjusted via an exemplary gain adjustment circuit such as gain adjustment circuit **1326** as depicted in FIG. **15**. When local control unit **310** wirelessly receives the desired gain setting as described in greater detail below with respect to FIG. **12**, it converts the received setting to a digital command to be transmitted to gain adjustment circuit ("GAC") DAC **1510**. The digital command may be derived from a look up table or the like that equates incoming desired gain settings to corresponding GAC DAC **1510** commands. The GAC DAC **1510** receives its digital command and converts it to an analog signal that is applied to one or more GAC LEDs **1512**. GAC LEDs **1512** may be any commercially available LEDs such as, but not limited to, a Lumex SML-LX0603SRW LED. The light generated by GAC LEDS **1512** varies based upon the digital command received from local control unit **1310**.

The light generated by GAC LEDs **1512**, as well as the audio received locally from audio input device **312** is received by local preamp **316**. In this embodiment of the present invention, local preamp **216** is a preamplification circuit. This circuit includes, inter alia, one or more photocells **1514** and a plurality of amplifiers **1516**. Photocells **1514** may be any commercially available photocell such as, but not limited to, cadmium sulfide ("CdS") photocells such as Silonex NSL-6112 photoconductive cells. Each photocell **1514** varies its resistance between two terminals based upon the amount of photons it receives. This varying resistance varies the analog signals applied to the input terminals of the plurality of amplifiers **1516** to vary the amplification of the audio received from audio input device **312** as desired by a user of recording system **100**. The amplified audio, as output by amplifiers **1516**, is then transmitted to local ADC **322**. Local ADC **322** converts the amplified audio signals to digital form for transmission to local control unit **310**. It should be noted that the depicted gain adjustment and preamplification circuits are merely exemplary and any other compatible hardware or software capable of adjusting gain and/or amplifying analog signals may be substituted without departing from the scope of the present invention.

In some embodiments of the present invention, local control unit **310** may be a digital signal processor such as Texas Instruments part number TMS320C5509A. However, the present invention is not so limited. Any combination of hardware and software may be substituted for any component described herein without departing from the scope of the present invention.

Similarly, local receiver **302** allows audio received from other components of recording system **100** to be played locally at local audio device **102**. Such audio may be received in either analog or digital form at local receiver **302**. However, if the audio is to be received in analog form, local control unit **310** may be equipped with an on-board ADC or an independent ADC may be incorporated in local audio device **102** without departing from the scope of the present invention to allow local control unit **310** to receive the audio in digital form. Thereafter, the audio may be processed or relayed directly to local DAC **324**, which converts the audio data back to analog form. The analog audio may then be amplified by local amp **326** prior to transmission through local audio output device port **328** to local audio output device **330**. Local audio output device **330** may be any type of commercially available audio output device such as headphones, speakers, and the like, and local audio output device port **328** may be any commercially available audio output device port that is compatible with local audio output device **330** and the internal components of local audio device **102**. Local receiver **302** may be virtually any receiver compatible with the other components of local audio device **102** including, but not limited to, a Micrel Semiconductor MICRF505 RadioWire® transceiver.

Memory **332** of local audio device **102** locally stores audio processed by local control unit **310** in one or more audio files. In one aspect of the present invention, local control unit **310** receives recordable audio from local audio input device **312**, which may be worn by the performer and connects to local audio device **102** at local audio input device port **314**. However, in alternate embodiments, local control unit **310** may also receive audio from other components of recording system **100** via local receiver **302**. The locally stored audio files may include identification data such as local audio device identifiers, track identifiers, performer identifiers, and the like as discussed in greater detail above. Furthermore, the locally stored audio files include timestamps (e.g., timestamps may be stored in the header of the audio file) that indicate when, during the audio event, each segment of audio occurred. The timestamps may be generated based upon timecodes created by local timecode generator **304** or based upon master timecodes. Such master timecodes may be received using a plurality of methods or components including, but not limited to, wirelessly from a master timecode source through local receiver **302**, from a timecode source connected to local audio input device port **314**, and from local audio input device **312** wherein the master timecodes are received from an ultrasonic signal. Local timecode generator **304** may be synchronized with the master timecode generator during recording of the audio event as described in further detail below with

respect to FIG. **5**. Or, alternatively, the timestamps may be synchronized post-recording as described in further detail below with respect to FIGS. **9** and **10**. Simultaneous with the local recording of audio received from local audio input device **312**, this audio may also be transmitted through local transmitter **308** to receiver **106** and/or recorder **108** to allow recording of the audio event. In this scenario, receiver **106** and/or recorder **108** may simultaneously record a multi-track recording of all of the single tracks of audio received from local audio devices **102**, which are worn by the performers of the audio event.

Memory **332** may be virtually any type of commercially available removable or non-removable memory including, but not limited to, flash memory cards, compact flash memory cards, Universal Serial Bus ("USB") thumbdisks, and the like. Use of removable memories **332** facilitates removal and insertion of these memories into a PC or the like for electronic combination or mixing of the recorded audio data. Such electronic mixing may be performed via commercially available software such as Pro Tools or the like and may be performed in addition to or in lieu of live wireless recording of the audio event.

Local audio devices **102** also receive non-audio information (e.g., time reference signals, digital commands, audio, etc.) from other components of recording system **100** via local receiver **302**. During synchronous operation of recording system **100**, a portion of the received data may be used to synchronize local timecode generator **304** to the master timecode generator integral to one of the components of recording system **100** (e.g., RCU **104**, recorder **108**, etc.) using a process such as that described below with respect to FIGS. **4**A, **4**B, and **5** or an equivalent thereof. Alternatively, during asynchronous operation of recording system **100**, the received data may include master timecodes from the master timecode generator that may be used to timestamp individual audio samples and/or files such that the audio received at multiple local audio devices **102** may be synchronized post-recording using one of the methods discussed below with respect to FIGS. **9** and **10** or an equivalent thereof.

As described in further detail below with respect to FIG. **5**, local audio devices **102** operating in the synchronous mode may require one or more of comparator **334**, oscillator **336**, and counter **338**. In one aspect of the present invention, oscillator **336** is a 48 kilohertz ("kHz") voltage controlled oscillator. However, alternate embodiments of oscillator **336** may be substituted without departing from the scope of the present invention including but not limited to a high speed clock divided to produce 48 kHz. In the embodiment of the present invention depicted in FIG. **3**A, oscillator **336** feeds the sample rate input of local ADC **322**, as well as counter **338**, which provides a time reference for local timecode generator **304**. In this configuration, if local ADC **322** is set to operate at 48 kHz, varying the voltage applied to the clock control input of oscillator **336** will proportionately vary the output of oscillator **336** and, consequently, the sample rate of local ADC **322** and the rate at which local timecode generator **304** keeps time.

When local audio devices **102** such as those depicted in FIG. **3**A are used in conjunction with recorders **108** that incorporate a single clock to both regulate the speed of the master timecode generator and control the internal recorder ADC sample rate, comparators **334** help maintain synchronization of local audio devices **102** with each other and with recorder **108** by varying the speed of the respective local timecode generators **304** and the sampling rate of the respective local ADCs **322**. As per an algorithm or hard-wired logic that duplicates the sequence depicted in FIG. **5**, or an equivalent thereof, comparators **334** compare the timecodes generated by the master timecode generator with timecodes generated by the locally timecode generator and, if necessary, increase or decrease the speed of the respective local timecode generator **304** and the sampling rate of the respective local ADC **322** such that these speeds are synchronized with the speed of the master timecode generator and the ADC of recorder **108**. That is, comparators **334** generate, through software or hardware, the voltage that is applied to the clock control input of the respective oscillator **336** that proportionately varies the sample rate of local ADC **322** and the rate at which local timecode generator **304** keeps time as necessary to maintain synchronization with the sample rate of the ADC of recorder **108** and the master timecode generator, respectively. In this manner, all local audio devices **102** and recorder **108** sample at virtually identical sample rates allowing a wireless recorder **108**, or a wireless recorder/receiver combination, to accurately combine multiple independent tracks of audio, wherein each independent track of audio is received from one of the performer's local audio device **102**.

Whenever playback of locally recorded audio is required (e.g., to remedy recording errors caused by transmission losses), RCU **104** transmits a digital command to all local audio devices **102** to playback the audio data stored in the respective memories **332** starting with and subsequent to a specific time reference as indicated by a specific timecode. The digital command is received by local receivers **302**, which transmit or relay the command to their respective local control unit **310**. Thereafter, local control units **310** access the data stored in the respective memory **332** and cause this data to be played or transmitted sequentially via local transmitter **308** starting with the data associated with the requested timecode. The use of timecodes and synchronization of local and master timecode generators, as well as local and recorder audio sampling rates, as discussed herein allows multiple local audio devices **102** to replay audio with the exact timing that occurred during the audio event.

Local audio devices **102** may be bodypacks such as the local audio device **102** depicted in FIG. **3**B. In such an embodiment, display **318** may be a small liquid crystal display ("LCD") or the like and keypad **320** may include a plurality of buttons that allow a user to perform functions including, but not limited to, those that relate to transmitter frequency, receiver frequency, microphone gain, high pass filter, group ID code, unit ID code, transmitter encryption code, and transmitter operating mode. For example, transmitter and receiver frequencies may be adjustable in predetermined frequency steps. Microphone gain may be adjusted, which in turn adjusts the current setting of a preamp such as local preamp **316**. Adjustment of the high pass filter may be incorporated to enable and disable, or otherwise adjust, the high pass audio filter of the audio input device such as audio input device **312**.

When multiple local audio devices are incorporated in to a group, each local audio device in the group as well as other components of the recording system (e.g., an RCU) may be assigned a group ID. Similarly, the unit ID identifies each specific local audio device within the group of local audio devices.

For local audio devices transmitting encrypted audio and data, the transmitter encryption code is set to match the encryption code of all receiving devices (e.g., an RCU, recorder, or receiver). Correctly setting this code allows the

receiving device to properly decrypt the received transmission, while preventing unauthorized users from recording the data.

The operating mode of each local audio device can encompass any one of a number of modes. For example, the operating modes may include USA or European modes, as well as stereo modes. Selection of a specific mode may alter settings such as transmitter bandwidth, audio sampling parameters, and the like.

Although many specific features and functions for the local audio devices have been delineated herein, other features and functions may be added or eliminated without departing from the scope of the present invention.

Additionally, handheld embodiments may include any one of a variety of commercially available batteries to function with the power supply **306** without departing from the scope of the present invention. Power supply **306** may be virtually any power component or combination thereof that is compatible with the other components of local audio device **102** including, but not limited to, a Texas Instruments TPS62000DGS Power Module alone or in combination with a Linear Technology LTC3402 Synchronous Boost Converter.

Alternate embodiments of local audio device **102** are envisioned in which local receiver **302** are eliminated. In one such embodiment, local transmitter **308** is enabled whenever an audio event requiring recording is occurring. Local timecode generator **304** may be designed to generate timecodes whenever local transmitter **308** is enabled. When local transmitter **308** is not operating, the current value of local timecode generator **304** is stored in non-volatile memory to allow local timecode generator **304** to continue counting from the last generated timecode when the local transmitter **308** is re-enabled. Such embodiments include a timecode generator capable of generating unique timecodes for several years without a repeated timecode.

During recording, each local audio device **102** transmits data to one or more receivers and/or recorders. During recording, the receivers and/or recorders automatically detect corrupted audio data received from local audio devices **102** and maintain a list of same. The list of corrupted audio data contains references to the respective local audio device **102** from which the corrupted audio data was received to allow such data to be recovered post-recording.

Post-recording, memories **332** may be removed from each local audio device **102** such that locally recorded data may be retrieved and used to repair the corruption of the audio file generated by the receiver/recorders that occurred due to the receipt of corrupted audio data. Such data recovery may be performed using the multi-memory unit of the present invention or an equivalent. In one embodiment, the multi-memory unit may connect directly to the receivers and/or recorders to allow this equipment to directly retrieve the required audio data. In another embodiment, memories **332** may be connected directly to the receivers/recorders for retrieval of the audio data, thereby eliminating the need for any extraneous equipment such as a personal computer. Identifiers such as local audio device identifiers, track identifiers, performer identifiers, and the like may be decoded from the audio data to allow the file manipulator to more quickly and easily manipulate the audio data.

Since the timecodes generated locally by each local audio device **102** may vary with respect to each other, the receivers, and/or the recorders, the present invention provides a method for ensuring that audio data retrieved from memories **332** is inserted in the proper time sequence with respect to the audio file(s) generated by the receiver/recorders. To achieve this, during recording, the receiver(s) and/or recorders generate or populate a cross-reference table, database, or the like that correlates the timecodes of the audio files generated by the receiver/recorders, as well as the timecodes of all audio data received from all local audio devices **102**. That is, the cross-reference mechanism correlates each timecode generated by a receiver or recorder to each timecode generated by each local audio device. In this manner, the timecodes of audio retrieved from memories **332** may be cross-referenced to determine the correlating timecode of the audio file generated by the receiver/recorders. Thereafter, the retrieved audio may optionally be re-stamped with the timecode of the receiver/recorder and inserted in its proper place within the receiver/recorder audio file. In this manner, audio may be wirelessly recorded with zero data loss.

Referring now to FIG. **4**A, illustrated is a flow diagram of one embodiment of a process for operation of a recording system such as recording system **100** in synchronous timecode generator mode in accordance with one embodiment of the present invention. Process **400** begins at **402**. For example, at **402**, one or more performers may each don a local audio device, such as local audio device **102** as described with respect to FIGS. **1**, **3**A, and **3**B. Also, a sound engineer or other personnel may be equipped with a control unit such as RCU **104**. Process **402** then proceeds to **404**.

At **404**, initialization occurs. During initialization, the local control unit such as local control unit **310** or other form of central processing unit is reset. Thereafter, the local transmitter, local receiver, ADC, DAC, and local timecode generator clock are initialized. The process then optionally proceeds to **406**, at which the sampling rate of the ADC is set. Alternatively, the sampling rate may be set via hardware or via software executed as part of a separate algorithm. In some embodiments of the present invention, a sample rate of 48 kHz is incorporated.

Next, at **408**, wireless receive channels are established between the local audio device and one or more wireless devices such as RCUs (e.g., RCU **104**), receivers, and audio recorders. To establish the channel, the local receiver of the audio device receives one or more data packets from the remote wireless device and stores the packets in a designated buffer. For example, when establishing wireless communication with a RCU, the local audio device may receive one or more data packets containing information such as a master timecodes, transport status (i.e., transport mode of an audio recorder), and the like. These packet(s) are then stored in an RX buffer (i.e., a reserved segment of memory used to hold data while it is being processed). Process **400** then proceeds to **410**.

At **410**, the local control unit reads the master timecode contained in the RX buffer and jam synchronizes the local timecode generator with the master timecode. The jam sync synchronizes the local audio device with the RCU while allowing the local audio device to supply its own timecode. Local supply of synchronized timecodes ensures proper timing during periods in which the master timecodes cannot be read (e.g., the RCU is temporarily unstable, wireless communication dropouts, etc.). Local supply of timecodes also allows local identifiers such as local track identifiers, local audio device identifiers, and the like to be added to the respective local audio device timecode. Such identifiers allow the locally recorded audio to be distinguished from audio recorded by other local audio devices. Such ability to distinguish is particularly useful to quickly and easily identify the audio tracks post-recording.

Next, at **412**, process **400** queries the transport status stored in the RX buffer. If at **412**, the transport status is stop, process **400** returns to **410**. However, if at **412**, the transport status is record, process **400** proceeds to **414**. At **414**, a new audio file is created in memory (e.g., on a flash card) and the newly created file is timestamped. In one aspect of the present invention, timestamping includes storing the timecode in the file header. Process **400** then proceeds to **416**.

At **416**, the local control unit waits for an audio sample interrupt from the ADC. Once an audio sample interrupt occurs, process **400** proceeds to **418**. At **418**, the audio sample is retrieved from the ADC and stored in the local memory. In one aspect of the present invention, the audio sample is stored in the next available address of the local memory. Next, at **420**, the timecode generator counter is incremented, thereby indicating that the time period for one sample of audio has elapsed.

Process **400** then proceeds to **422**, at which the local control unit transmits the audio sample through the local transmitter to the other wireless devices such as RCUs, receivers, audio recorders, and the like. For example, audio from multiple local audio devices may be transmitted to a multi-track recorder for recording of the audio event while each local audio device locally records its performer's audio. At **424**, process **400** queries the RF buffer of the local receiver to determine the availability of a new master timecode packet. If at **424**, a new master timecode packet has not been received from the RF receiver, process **400** returns to **416**. However, if at **424**, a new master timecode packet has been received, process **400** proceeds to **426** as depicted in FIG. **4**B.

At **426**, process **400** executes a feedback loop algorithm, which modifies the speed of the local timecode generator as necessary to maintain its synchronization with the master timecode generator (e.g., a timecode generator contained within the RCU or master recorder). This algorithm may be implemented using any one of a variety of methods. In one embodiment of the present invention, a feedback loop algorithm, such as process **500** depicted in FIG. **5**, modulates a low-pass filtered feedback error voltage that is supplied by the local control unit directly to the local oscillator. The local oscillator then controls the sample rate of the ADC and the speed of the local timecode generator by supplying the feedback error voltage to the ADC's sample rate input and the local timecode generator's clock control input. Alternatively, a comparator independent of the local control unit may perform the comparison of the master timecodes and the local timecodes and may vary the sample rate of the ADC and the speed of the local timecode generator by directly supplying the feedback error voltage to the oscillator. A variety of hardware and software equivalents of this function may be substituted without departing from the scope of the present invention.

Referring now to FIG. **5**, the feedback loop algorithm begins at **502**. At **504**, the current local timecode is retrieved from the timecode generator such as local timecode generator **304** and is written to the variable TCgen. Process **500** proceeds to **506**. At **506**, the current master timecode is retrieved from the RX buffer of the local receiver and is written to the variable TCrx and process **500** proceeds to **508**. At **508**, variable TCdiff is calculated by subtracting TCrx from TCgen. Process **500** then proceeds to **510**, at which process **500** compares TCdiffto zero. If, at **510**, TCdiff is less than zero, process **500** proceeds to **512**, at which the feedback error voltage supplied to the local oscillator's DAC by the local control unit is increased above the previously supplied feedback error voltage. The local oscillator's DAC then supplies the new feedback error voltage to the local oscillator, which, in turn, supplies a new clock input voltage to the local timecode generator and a new sample rate input to the ADC. In this manner, the speed of the local timecode generator and the sample rate of the ADC are increased to maintain synchronization with the master timecode generator. However, alternate embodiments of the present invention are envisioned in which only one of either the speed of the local timecode generator or the sample rate of the ADC is modified.

Alternatively, if at **510** TCdiff is not less than zero, process **500** proceeds to **514**, at which TCdiff is analyzed to determine if it is greater than zero. If yes, process **500** proceeds to **516** and the feedback error voltage supplied to the local oscillator's DAC by the local control unit is decreased below the previously supplied feedback error voltage. The local oscillator's DAC then supplies the new feedback error voltage to the local oscillator, which, in turn, supplies a new clock input voltage to the local timecode generator and a new sample rate input to the ADC. In this manner, the speed of the local timecode generator and the sample rate of the ADC are decreased to maintain synchronization with the master timecode generator. However, alternate embodiments of the present invention are envisioned in which only one of either the speed of the local timecode generator or the sample rate of the ADC is modified. Furthermore, alternate embodiments are envisioned in which an inverse relationship occurs (e.g., DAC voltage is increased when TCDiff is greater than zero and it is decreased when TCDiff is less than zero).

If TCdiff is neither less than zero as determined at **510** or greater than zero as determined at **514**, then TCdiff is equal to zero. In this scenario, the local and master timecode generators are synchronized and, therefore, no adjustment is made to the speed of the local timecode generator. At this point, process **500** ends at **518**.

Although FIG. **5** depicts one method of performing a feedback loop, many variations of this feedback loop may be substituted without departing from the scope of the present invention. For example, the feedback loop may be implemented as a digital phased locked loop that re-samples the audio in a manner that simulates a hardwired feedback loop. Also, the feedback loop may include a low pass filter.

Referring back to FIG. **4**B, after execution of the feedback loop algorithm at **426**, process **400** proceeds to **428**. At **428**, the local timecode generator is jam synchronized with the newly received master timecode read from the RX buffer. Next, process **400** optionally proceeds to **430**, at which a timecode is stored as an escape sequence in the next available address of the local memory. The escape sequence stores a master timecode in addition to the locally generated timestamp. This escape sequence may be used post-processing to resample the audio based upon interpolated master timecode data. Process **400** then proceeds to **432**. At **432**, process **400** queries the continuous loop record mode. If at **432** the continuous loop record mode is enabled, process **400** returns to **416** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **432**, the continuous loop record mode has not been enabled, process **400** proceeds to **434**. At **434**, process **400** queries the transport status. If at **434** the transport status is record, process **400** returns to **416** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **434**, the transport status is stop, process **400** returns to **410**, at which process **400** continuously jam synchronizes the local timecode generator with the master timecodes received in the RX buffer until the transport status changes from stop to record at **412**.

Turning next to FIG. **6**, illustrated is a flow diagram of one embodiment of a process for recording audio and for replaying and re-recording segments of missed audio in accordance with embodiments of the present invention. Process **600** begins at **602**. For example, at **602**, one or more performers may each don a local audio device, such as local audio device **102** as described with respect to FIG. **2**A. Process **600** then proceeds to **604**.

At **604**, a master unit, such as RCU **104**, receiver **106**, or recorder **108** transmits master timecodes to each local audio device, and process **600** proceeds to **606**. At **606**, each local audio device synchronizes (e.g., jam syncs) its respective on board local timecode generator with the master timecodes received from the master unit, thereby synchronizing all local audio device timecode generators with the master timecode generator contained within the master unit. Process **600** then proceeds to **608**. At **608**, local audio devices begin locally recording audio received from an audio input device. This audio is stored in the memory of the respective local audio device with timestamps generated by the local timecode generator. Identifiers such as track identifiers, local audio device identifiers, and the like may also be stored in the memory of the respective local audio device to allow the locally recorded audio to be associated by track, local audio device, or the like post-recording. Each local audio device also simultaneously transmits its received audio to recorders or receiver/recorder combinations such as receivers **106** and recorders **108** in real time. Such audio may be transmitted alone or in combination with its respective timecodes. The audio received from each of the local audio devices (e.g., the local audio device of each performer) may be combined to create one or more multi-track audio files that are stored with master timestamps generated by the receiver/recorder's internal master timecode generator. In some embodiments of the present invention, local timecodes generated by the respective local audio device are stored with the multi-track audio files in addition to the master timestamps.

Process **600** then proceeds to **610**. At **610**, process **600** queries the initiation of audio replay. The initiation of audio replay may be manual or automatic. For example, if a user detects a loss of audio, the user may manually initiate audio replay beginning at the specific timecode reference at which the transmission error occurred. Alternatively, if a loss of audio is automatically detected by the receiving equipment, a playback request may be sent from the receiving equipment to the controlling unit such as a remote control unit. In response, such controlling unit may command the local audio devices to replay or retransmit the missed audio to the receiving equipment beginning at the timecode at which the loss of data occurred or at a conveniently close time thereto (e.g., zero to ten seconds prior to the loss of data).

If, at **610**, audio replay is not initiated either manually or automatically, process **600** returns to **608**. However, if, at **610**, audio replay is initiated, process **600** proceeds to **612**. At **612**, a controlling unit, such as RCU **104**, sends a signal to the local audio devices requesting playback of the stored audio starting at a specific timecode.

Next, at **614**, each local audio device processes the playback command and synchronizes playback to the timecode contained in the playback command. In addition, at least one local audio device transmits the synchronization data to the receiving equipment (e.g., receiver **106**, recorder **108**, etc.) to synchronize recording of the replayed audio. Process **600** then proceeds to **616**. However, in alternate embodiments of the present invention, the receiving equipment and the local audio devices may simultaneously receive the synchronization and time reference data from the transmitting equipment (e.g., the controlling unit).

At **616**, one or more local audio devices transmit, or replay, its respective stored audio starting with the audio that corresponds to the time specified by the timecode. The receiving equipment simultaneously records the replayed audio from each of the local audio devices and stores it within the previously recorded audio according to its timecode data. That is, due to the highly accurate synchronization of all of the components of the recording system, the receiving equipment may insert the replayed audio data that was not recorded during the audio event due to wireless transmission errors into the original recording at the nearly the exact time at which the missed audio originally occurred, thereby compensating for any transmission losses. Process **600** then proceeds to **618**. At **618**, one or more local audio devices continue to replay audio while the receiving equipment records the audio.

At **620**, process **600** queries the status of audio replay. If, at **620**, the audio has been fully replayed, process **600** proceeds to **608**. At **608**, the local audio devices may record a new audio event or may replay a different segment of recorded data. Otherwise, if, at **620**, all requested audio has not been replayed or re-recorded, process **600** returns to **618**.

Referring now to FIG. **7**, illustrated is a flow diagram of one embodiment of a process for operation of a recording system such as recording system **100** in asynchronous timecode generator mode in accordance with one embodiment of the present invention. Process **700** begins at **702**. For example, at **702**, one or more performers may each don a local audio device, such as local audio device **102** as described with respect to FIGS. **1**, **3**A, and **3**B. Also, a sound engineer or other personnel may be equipped with a control unit such as RCU **104**. Process **702** then proceeds to **704**.

At **704**, initialization occurs. During initialization, the local control unit such as local control unit **310** or other form of central processing unit is reset. Thereafter, the local transmitter, local receiver, ADC, DAC, and clock are initialized. The process then proceeds to **706**, at which the sampling rate of the ADC is set. In some embodiments of the present invention, a sample rate of 48 kHz is incorporated.

Next, at **708**, wireless receive channels are established between the local audio device and one or more wireless devices such as RCUs (e.g., RCU **104**), receivers, and audio recorders. To establish the channel, the local receiver of the audio device receives one or more data packets from the remote wireless device and stores the packets in a designated buffer. For example, when establishing wireless communication with a RCU, the local audio device may receive one or more data packets containing information such as a timecode, transport status (i.e., transport mode of an audio recorder), and the like. These packet(s) are then stored in an RX buffer. Process **700** then proceeds to **710**.

At **710**, the local control unit reads the transport status and the master timecode contained in the RX buffer. Next, at **712**, process **700** queries the transport status. If at **712**, the transport status is stop, process **700** returns to **710**. However, if at **712**, the transport status is record, process **700** proceeds to **714**. At **714**, a new audio file is created in memory (e.g., on a flash card) and the timecode is stored in the header of the newly created file. Such timecode may optionally include identification information such as track identifiers, local audio device, identifiers, and the like. Or, alternatively, such identification information may be stored in the newly created file in a location other than the timecode. For example, such identification information may be stored in

the data stream in the header of the newly created file. However, the present invention is not so limited. Process **700** then proceeds to **716**.

At **716**, the local control unit waits for an audio sample interrupt from the ADC. Once an audio sample interrupt occurs, process **700** proceeds to **718**. At **718**, the audio sample is retrieved from the ADC and stored in the local memory. In one aspect of the present invention, the audio sample is stored in the next available address of the local memory. Process **700** then proceeds to **720**, at which the local control unit transmits the audio sample through the local transmitter to the other wireless devices such as receivers, audio recorders, and the like.

At **722**, process **700** queries the RF buffer of the local receiver to determine the availability of a new master timecode packet. If at **722**, a new master timecode packet has not been received from the RF receiver, process **700** returns to **716**. However, if at **722**, a new master timecode packet has been received, process **700** optionally proceeds to **724**. At **724**, the timecode is stored as an escape sequence in the next available address of the local memory. Process **700** then proceeds to **726**. At **726**, process **700** queries the continuous loop record mode. If at **726** the continuous loop record mode is enabled, process **700** returns to **716** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **726**, the continuous loop record mode has not been enabled, process **700** proceeds to **728**. At **728**, process **700** queries the transport status. If at **728** the transport status is record, process **700** returns to **716** to wait for an audio sample interrupt from the ADC as discussed above. However, if at **728**, the transport status is stop, process **700** returns to **710**, at which process **700** continuously reads the transport status and master timecodes from the RX buffer until the transport status changes from stop to record at **712**.

Operation of the present invention in asynchronous mode allows one or more components of local audio devices such as local audio devices **102** (e.g., local timecode generator, comparator, counter, etc.) to be eliminated in embodiments in which the local audio devices utilize master timecodes generated by the master timecode generator rather than locally generated timecodes.

Referring next to FIG. **8**, depicted is multi-memory unit **800** for reading and/or reformatting audio files recorded on a plurality of local audio device memories (e.g., memories **332**). In its simplest form, such as the embodiment depicted in FIG. **8**, multi-memory unit **800** includes a plurality of individual memory ports **802***a*-**802**/(e.g., flash memory card drives, compact flash memory card drives, USB thumbdisk ports, etc.). Also optionally included is a plurality of memory status displays **804***a*-**804**/to indicate to a user which memory ports **802** are in use. Similarly, power status display **806** and external connection status display **808** may be optionally included to indicate the presence of power and an external connection (e.g., a personal computer), respectively. Multi-memory unit **800** may be equipped with an integral user interface or may be connected to an external interface (e.g., a personal computer) to allow the audio files contained on each memory to be manipulated and/or read.

In one aspect of the present invention, the memory of each local audio device such as local audio device **102** may be removed after completion of a performance, videotaping, etc. Each memory may then be inserted into a corresponding one of memory ports **802**. Thereafter, all of the individual audio files may be combined to provide one or more comprehensive audio files. Or, alternatively, each audio file may be individually reformatted or otherwise manipulated prior to creation of one or more comprehensive audio files.

In embodiments of the present invention in which the recording system recorded the audio event in asynchronous mode, or in which long periods (e.g., 8 hours) of recording occurred, multi-memory unit **800** may be used to resample the audio samples to ensure that each audio file's timestamps are properly synchronized. One example of such as process is illustrated in the flowchart of FIG. **9**.

In some embodiments of the present invention, multi-memory unit **800** may allow identification information such as track identifiers, local audio device identifiers, and the like to be added to each portion of audio stored in memory **332**. In such embodiments, multi-memory unit **800** may have the ability to modify the timecode(s) associated with each portion of audio recorded on each memory **332** to add, modify, or delete the desired identification information. Or, alternatively, multi-memory unit **800** may have the ability to add such identification information to each portion of audio stored in memory **332** in a location other than the timecode (e.g., in a file header).

Referring now to FIG. **9**, illustrated is a flow diagram of one embodiment of a process for interpolating timestamps for unstamped audio samples (i.e., audio samples that are not associated with a master timecode timestamp) based upon the timestamps of stamped audio samples (i.e., audio samples that are associated with a master timecode timestamp), and resampling the audio samples to include the interpolated timestamps in accordance with embodiments of the present invention. After recording of an audio event, the audio data stored in the memory of the local audio device (e.g., memory **332**) will typically be stored as an audio sample stream wherein approximately one out of every one thousand to one hundred thousand samples includes a timestamp generated by a remote master timecode generator. However, the interval between timestamped audio samples may be greater than the aforementioned interval if the wireless timecode link was less reliable than a standard wireless link.

The resampling process depicted in FIG. **9**, and equivalents thereof, analyze the occurrence of the relatively sparse timestamped audio samples to generate a linear interpolation or a best fit curve. This curve is then used to interpolate timestamps for the unstamped audio samples. After the timestamp of each audio sample has been interpolated, the audio samples may then be re-sampled such that the audio samples are now synchronized with samples generated by the master timecode generator. In one aspect of the present invention, the audio samples are resampled based upon the calculated curve to simulate the condition of an ADC whose sample rate input was driven directly by the master timecode generator's source.

If all of the audio from all local audio devices is resampled in this manner, each resulting resampled audio file appears as if it was originally sampled with an accurate audio sample clock derived from the master timecode source. This resampling allows each audio file to include a single timestamp that marks the master timecode of the first audio sample of the audio file. Furthermore, since the audio files now appear as if they have been sampled by an extremely accurate audio sample clock, each audio sample's timestamp may be accurately calculated based solely on the audio sample rate and the timestamp of the first audio sample of the audio file. This condition allows the audio files to be formatted and/or stored as a standard timecoded broadcast .WAV file, thereby allowing them to be read, edited, etc. using standard, commercially-available editing

systems. That is, the files may be processed in the same manner as if the audio file had been generated by a standard multi-track audio recorder. Such condition allows the present invention to be easily integrated with other industry standard recording equipment.

One such resampling process is illustrated in FIG. **9**. Process **900** begins at **902**. For example, at **902**, one or more local audio device memories may be removed from its respective local audio device and may be inserted into a multi-memory unit **800**, or an equivalent thereof. Process **902** then proceeds to **904**.

At **904**, process **900** determines the desired starting and ending timecodes and stores this data in the variables TimeCodeStart and TimeCodeEnd, respectively. The desired starting and ending timecodes may be input by a user or may be suggested or automatically determined by the algorithm. Process **900** then proceeds to **906**. At **906**, a variable, i, is initialized to a value of zero. The variable i corresponds to the position of audio samples or data points in a data array represented by the variable AudioSample[i]. Process **900** then proceeds to **908**.

At **908**, process **900** begins an iterative search for the audio file that matches the desired starting timecode of the output file by comparing the value of TimeCodeStart with the value of the timecode of AudioSample[i]. If, at **908**, the value of TimeCodeStart is equal to the value of the AudioSample[i] timecode, process **900** proceeds to **912**. However, if at **908** the value of TimeCodeStart is not equal to the value of the AudioSample[i] timecode, process **900** proceeds to **910**. At **910**, the variable i is increased by a value of one thereby allowing the value located in the next position of the audio sample array to be compared to the value of TimeCodeStart when process **900** returns to **908**.

If the value of TimeCodeStart is equal to the value of the AudioSample[i] timecode, process **900** proceeds to **912**. At **912**, a variable, n, is initialized to a value of one. The variable n is added to the variable i to allow process **900** to continue to traverse the audio sample array while maintaining the location of the audio sample at the starting timecode, which is represented by the variable AudioSample[i]. Process **900** then proceeds to **914**. At **914**, the value of the AudioSample[i+n] timecode is compared to the value of TimeCodeEnd. If at **914**, the value of the AudioSample[i+n] timecode is greater than or equal to the value of TimeCodeEnd, process **900** proceeds to **916**. At **916**, the value of the AudioSample[i+n] timecode is again compared to the value of TimeCodeEnd. If at **914**, the value of the AudioSample[i+n] timecode is greater than the value of TimeCodeEnd, process **900** proceeds to **928**, at which process **900** terminates. However, if at **916**, the value of the AudioSample[i+n] timecode is equal to the value of TimeCodeEnd, process **900** proceeds to **922**.

Conversely, if at **914**, the value of the AudioSample[i+n] timecode is less than the value of TimeCodeEnd, process **900** proceeds to **918**. At **918**, the value of the AudioSample [i+n] timecode is compared to the value of CurrentTimeCodeEscapeSequence. If, at **918**, the value of the AudioSample[i+n] timecode is not equal to the value of TimeCodeEscapeSequence, process **900** proceeds to **920** where the variable n is increased by one and process **900** returns to **914**. However, if at **918**, the value of the AudioSample[i+n] timecode is equal to the value of TimeCodeEscapeSequence, process **900** proceeds to **922**.

At **922**, the average time period "T" that elapsed between the audio samples that occurred between AudioSample[i] and AudioSample[i+n] may be calculated by subtracting the value of the timecode of AudioSample[i] from the value of the timecode of AudioSample[i+n] and dividing by n, wherein n is now equivalent to the number of audio samples that occurred between the current timestamped audio sample and the previous timestamped audio sample. Process **900** then proceeds to **924**. At **924**, AudioSamples[i] through AudioSamples[i+n] are re-sampled at any desired sample rate based upon the value of T as calculated in **922**, or any other desired sample rate, using an audio resampling algorithm (e.g., linear interpolation). Process **900** then proceeds to **926**, at which the variable i is set to a value equal to the current value of i plus the current value of n and process **900** returns to **912**. The iterative process continues until the value of the AudioSample[i+n] timecode is greater than the value of TimeCodeEnd, whereby process **900** proceeds to **928**, at which process **900** terminates.

A similar interpolation algorithm, such as the algorithm depicted in FIG. **10**, may be incorporated to break down single large audio files (e.g., an audio file recording the filming of multiple movie takes over a continuous eight hour period as a single eight-hour audio file) into smaller, more useful files (e.g., one audio file per take). These smaller files will allow the audio recorded locally by the local audio devices to be more easily matched or synchronized with the individual audio files recorded by a master recorder such as recorder **108**.

In one use of an embodiment of the present invention, multiple local audio devices store audio samples with wirelessly-received timecode and transport status samples continuously for the entire duration of the work day (e.g., an 8 hour period). In atypical scenario, while the local audio devices are recording continuously, a technician intermittently records segments of the eight-hour audio event. For example, in a film setting, each segment would typically represent a movie 'take' and might range from one to five minutes in duration. Consequently, the master recorder generates individual audio files (i.e., at least one audio file for each recorded segment such as a movie take), whereas each local audio device generates one massive audio file. Therefore, there is a need for a method of segmenting each large local audio file into smaller audio files that correspond to the segments recorded by the master recorder.

The segmentation method (i.e., the method of segmenting the large local audio devices' files to match the multiple, smaller master recorder's audio file) requires knowledge of which portions of the single local audio device audio file are important and which portions can be discarded. This information can be inferred from the transport status of the master recorder since it is typically operated by someone with this knowledge. Therefore, when the transport status of the master recorder changes from stop to record, it can be inferred that a new master recorder audio file begins, and, subsequently, when the transport status of the master recorder changes from record to stop, it can be inferred that the same master recorder audio file has ended. In addition, when the transport status of the master recorder remains in the stop mode, it can be inferred that the audio recorded by the local audio device during this time period may be discarded. This audio may be discarded post-processing as per algorithms such as that depicted in FIG. **10** or during live recording.

In embodiments of the present invention in which such data is discarded during live recording, the transport status and master timecode of the master recorder are wirelessly transmitted to the local audio devices. This information may be processed by the local audio devices to allow them to create a new audio file with the current master timecode of the master recorder whenever the received transport status

and master timecode indicate that the transport status has changed from stop to record. Similarly, the local audio devices may end the newly created audio file when the received transport status indicates that it has changed from record to stop. In this scenario, the resulting local audio device files will automatically be segmented and will each be marked with a master timestamp at the beginning of each file.

However, in embodiments of the present invention in which unimportant audio is not discarded during live recording and, therefore, one or more large audio files are created, the large audio files may be segmented as per a process such as process **1000** as illustrated in FIG. **10**. Process **1000** begins at **1002** at which one or more local audio devices have continuously recorded a lengthy quantity of audio data. Process **1000** then proceeds to **1004**.

At **1004**, a copy of the audio file directory containing the segmented audio files that correspond to the same time period as the local audio device's single large audio file is obtained from the master recorder. Process **1000** then proceeds to **1006**. At **1006**, a variable y is initialized to a value of zero. The variable y corresponds to the number of each file contained in the audio file directory copied from the master recorder. Process **1000** then proceeds to **1008**, at which the variable y is increased by one and a variable x is initialized to a value of one. The variable x corresponds to the position of each audio sample within a particular file. Process **1000** then proceeds to **1010**, at which the copied audio file directory is queried to determine if a file[y] (i.e., the file named with the number that corresponds to the value of y) exists in the audio file directory. If no, process **1000** proceeds to **1028** and terminates.

If file[y] does exist, process **1000** proceeds to **1012**, at which process **1000** determines the starting and ending timecodes for file[y] and stores them in the variables TimeCodeStart and TimeCodeEnd, respectively. Process **1000** then proceeds to **1014**, at which process **1000** compares the value of TimeCodeStart to the value of the timecode associated with AudioSample[x] stored in the memory of the local audio device. If at **1014** the value of TimeCodeStart is not equal to the value of the timecode associated with AudioSample[x], process **1000** proceeds to **1016**. At **1016**, the variable x is increased by one and process **1000** returns to **1014**. In this manner, TimeCodeStart is compared to each consecutive AudioSample[x] until the AudioSample timestamped with a value equal to TimeCodeStart is found. In some embodiments of the present invention, process **1000**, or an equivalent thereof, is performed after process **900**, or an equivalent thereof, to ensure that each of the audio samples has a timestamp (e.g., an interpolated timestamp).

When the AudioSample[x] having a timecode equivalent to TimeCodeStart is found at **1014**, process **1000** proceeds to **1018**. At **1018**, AudioSample[x] is extracted and process **1000** proceeds to **1020**, at which the variable x is increased by one and process **1000** proceeds to **1022**. At **1022**, process **1000** compares the value of TimeCodeEnd to the value of the timecode associated with AudioSample[x]. If at **1022**, the value of TimeCodeEnd is not equal to the value of the AudioSample[x] timecode, process **1000** returns to **1018**, whereupon audio samples are consecutively extracted until the timecode of the current AudioSample[x] equals TimeCodeEnd. If, at **1022**, the value of TimeCodeEnd is equal to the value of the timecode of AudioSample[x], process **1000** proceeds to **1024**, at which the final AudioSample[x] of the segmented audio file is extracted and the audio file is saved at **1026**.

Process **1000** then proceeds to **1008**, at which the variable y is increased by one and process **1000** proceeds to **1010** at which the audio file directory is queried to determine the existence offile[y]. Iffile[y] exists, process **1000** proceeds to **1012** and it continues thereafter as described above. However, if at **1010**, it is determined that file[y] does not exist, process **1000** proceeds to **1028**, at which it terminates.

Turning now to FIGS. **13**A and **13**B, depicted are a block diagram and a front view, respectively, of one embodiment of recorder **108** in accordance with the present invention. As best seen in FIG. **13**A, the depicted embodiment of recorder **108** includes, inter alia, recorder power supply **1306**, recorder memory **1308**, recorder local control unit **1310**, adjuster **1312**, adjuster ADC **1314**, recorder audio input device **1316**, recorder audio input device port **1318**, timecode port **1320**, recorder preamp ADC **1322**, recorder preamp **1324**, and recorder DAC **1326**.

Recorder power supply **1306** may be an AC electric plug compatible with an electrical receptacle as is commonly known in the art. Additionally, portable embodiments may include any one of a variety of commercially available batteries to function with power supply **1306** without departing from the scope of the present invention. Recorder power supply **1306** may be virtually any power component or combination thereof that is compatible with the other components of recorder **108** including, but not limited to, an SL Power Electronics PW174KB1203F01 AC adapter.

In some embodiments of the present invention, recorder local control unit **1310** is electrically coupled to the other components of recorder **108**, and it is a digital signal processor programmed with software such as that depicted in FIG. **11** to, for example, remotely control various functions of local audio devices **102**. For example, recorder local control unit **1310** may be programmed with an algorithm capable of remotely controlling the amplification of audio received at local audio devices **102**. In the depicted embodiment of the present invention, recorder local control unit **1310** is a digital signal processor such as a Texas Instruments TMS320C6713GDP digital signal processor, however, the present invention is not so limited. Any combination of hardware and software capable of executing a process such as that depicted in FIG. **11** may be substituted for any component described herein without departing from the scope of the present invention.

Recorder memory **1308** is electrically connected to recorder local control unit **1310** and stores information therein as discussed in further detail below with respect to FIG. **11**. In the depicted embodiment of the present invention, recorder memory **1308** is a Western Digital WD1600BEVE hard drive. However, recorder memory **1308** may be virtually any type of commercially available removable or non-removable memory including, but not limited to, flash memory cards, compact flash memory cards, Universal Serial Bus ("USB") thumbdisks, and the like.

Referring now to FIGS. **13**A and **13**B, depicted is one embodiment of a front control surface of recorder **108** in accordance with the present invention. Recorder **108** includes a plurality of adjusters **1312***a* through **1312***d*. In the depicted embodiment, adjusters **1312** are potentiometers. That is, each adjuster **1312** includes a knob protruding from the control surface of recorder **108** that, when turned, slides a wiper terminal across a resistive material to alter the electrical resistance of adjuster **1312**. A user may alter the position of adjuster **1312**, for example, to adjust the gain of a microphone connected to a local audio device **102** as discussed in greater detail below with respect to FIGS. **11**

and **12**. Adjusters **1312** may be any commercially available potentiometer such as, but not limited to, an Alps Electric Co., Ltd. RK09L1 1401A5L potentiometer.

In the depicted embodiment of the present invention, each adjuster **1312** may be set to local or remote trim mode by pressing its associated pushbutton **1313***a*-**1313***d*. Similarly, recording may be initiated by pressing pushbutton **1313***e* or stopped by pressing pushbutton **1313***g*. Or, playback may be initiated by pressing pushbutton **1313***f*. In the depicted embodiment of the present invention, pushbutton **1313** may be a flat illuminated pushbutton, however, the present invention is not so limited. Any combination of hardware and software capable of indexing adjuster **1312** to a local or remote trim mode, or initiating or stopping recording, or initiating playback, as described in greater detail below, may be substituted without departing from the scope of the present invention.

In remote trim mode, each adjuster **1312** modifies the gain of audio received via an audio input device (e.g., audio input device **312** of FIG. **3**A) connected to audio input device port **314** (FIG. **3**A) as also described in greater detail below with respect to FIG. **11**. In local trim mode, each adjuster **1312** modifies the gain of audio received via an audio input device (e.g., audio input device **1316**) connected to audio input device port **1318** as also described in greater detail below with respect to FIG. **11**. Recorder audio input device **1316** may be any type of commercially available audio input device such as a microphone and recorder audio input device port **1318** may be any commercially available audio input device port that is compatible with recorder audio input device **1316** and the internal components of recorder **108**. The received audio, as well as any digital signals (e.g., microphone input level, line input level, etc.), are then buffered and/or amplified by recorder preamp **1324** and are converted from analog to digital form by recorder preamp ADC **1322** such that the audio may be read in digital form by recorder control unit **1310**.

Each adjuster **1312** is electrically coupled to a respective, dedicated adjuster analog-to-digital converter ("ADC") **1314** (See FIG. **13**A). In turn, each adjuster ADC **1314** is electrically coupled to a dedicated analog input of recorder local control unit **1310**. As a user rotates the knob associated with a particular adjuster **1312**, the voltage across adjuster **1312** varies. Once adjuster **1312** is set to the desired position, the respective adjuster ADC **1314** measures the voltage across adjustor **1312** and converts it to a numeric value to be read by recorder local control unit **1310**. This numeric value corresponds to the desired gain, or amplification, of the audio received either at recorder **108** (i.e., if adjuster **1312** is set to local trim mode) or at the respective local audio device **102** (i.e., if adjuster **1312** is set to remote trim mode) as discussed in further detail below with respect to FIG. **11**. Adjuster ADC **1314** may be any commercially available analog-to-digital converter such as, but not limited to, a Maxim Integrated Products MAX1202BCAP analog-to-digital converter.

The gain of audio received from audio input device **1316** via audio input device port **1318** may be adjusted via an exemplary gain adjustment circuit such as gain adjustment circuit **1326** as depicted in FIG. **15**. When local control unit **1310** receives the desired gain setting from adjuster ADC **1314** as described above, it converts the received setting to a digital command to be transmitted to gain adjustment circuit ("GAC") DAC **1510**. The digital command may be derived from a look up table or the like that equates incoming desired gain settings to corresponding GAC DAC **1510** commands. The GAC DAC **1510** receives its digital command and converts it to an analog signal that is applied to one or more GAC LEDs **1512**. GAC LEDs **1512** may be any commercially available LEDs such as, but not limited to, a Lumex SML-LX0603SRW LED. The light generated by GAC LEDS **1512** varies based upon the digital command received from recorder local control unit **1310**.

The light generated by GAC LEDs **1512**, as well as the audio received locally from audio input device **1316** is received by recorder preamp **1324**. In this embodiment of the present invention, recorder preamp **1324** is a preamplification circuit. This circuit includes, inter alia, one or more photocells **1514** and a plurality of amplifiers **1516**. Photocells **1514** may be any commercially available photocell such as, but not limited to, cadmium sulfide ("CdS") photocells such as Silonex NSL-6112 photoconductive cells. Each photocell **1514** varies its resistance between two terminals based upon the amount of photons it receives. This varying resistance varies the analog signals applied to the input terminals of the plurality of amplifiers **1516** to vary the amplification of the audio received from audio input device **312** as desired by a user of recording system **100**. The amplified audio, as output by amplifiers **1516**, is then transmitted to recorder preamp ADC **1322**. Recorder preamp ADC **1322** converts the amplified audio signals to digital form for transmission to recorder control unit **1310**. It should be noted that the depicted gain adjustment and preamplification circuits are merely exemplary and any other compatible hardware or software capable of adjusting gain and/or amplifying analog signals may be substituted without departing from the scope of the present invention.

In the depicted embodiment, four (4) adjusters **1312** are provided to facilitate adjustment of local or remote audio gain, or amplification. However, a greater or lesser quantity of adjusters **1312** may be provided without departing from the scope of the present invention. Additionally, in an alternate embodiment of the present invention, a single adjuster **1312** may be employed to adjust the local or remote gain, or amplification. In such an embodiment, the recorder audio input port **1318** or the audio input port **314** of the local audio device **102** to be adjusted is selected (via software or hardware) prior to use of adjuster **1312** to set the respective gain or amplification.

Timecode port **1320** is electrically connected to recorder local control unit **1310** and is provided to transmit timecode information from recorder **108** to another component of recording system **100** (e.g., RCU **104**) as needed. For example, if recorder **108** is acting as a master timecode generator, RCU **104** may be hardwired to recorder **108** to receive timecodes from recorder **108** for synchronization purposes. Additionally, timecode port **1320** may transmit data packets to RCU **104** containing commands to remotely control the functions of local audio devices **102** such as, but not limited to, the gain, or amplification, of audio recorded at local audio device **102** as discussed in greater detail below with regards to FIG. **11**.

Turning now to FIG. **11**, depicted is a process **1100** for remotely generating commands for one or more local audio devices **102**. In our exemplary embodiment, these commands are generated by a user at recorder **108**, however, alternate embodiments of the present invention are envisioned in which such commands are generated by another component of recording system **100** such as, but not limited to, mixer **109** as discussed in greater detail below. In the exemplary embodiment, process **1100** is executed by recorder local control unit **1310** and begins at **1102**. Process **1100** then proceeds to step **1104**, at which the value of the variable N is set to equal a value of zero. Each adjuster **1312**

is associated with a unique value of variable N that corresponds to its position relative to other adjusters **1312**. For example, since adjuster **1312***a* is the first adjuster in a row of adjusters **1312** (as read from left to right and as depicted in FIG. **13**B), it is assigned a variable N value of one (1). Each subsequent adjuster **1312** is associated with the next higher value of variable N. That is, adjuster **1312***b* is assigned a variable N value of two (2), adjuster **1312***c* is assigned a variable N value of three (3), etc.

Next, at step **1106**, the value of variable N is incremented by one (1). Therefore, on the first iteration of process **1100**, the process is performed for the adjuster **1312** having a variable N value of one (1) (i.e., adjuster **1312***a*). Each time the process returns to step **1106**, the value of N is incremented by one (1) to perform the same process on the next adjuster. At the point that process **1100** has been performed for all adjusters **1312** (i.e., at step **108** when the value of N exceeds the value of the variable N of the adjuster having the highest variable N value), process **1100** returns to **1104** at which it resets the value of variable N to zero to restart the process beginning with the adjuster having the lowest variable N value. In this manner, the position of all adjusters **1312** are continually read and processed, as required, in a sequential manner and as discussed in greater detail below. This ensures that recording system **100** is constantly provided with updated information as described in greater detail below.

Next, at step **1108**, the current value of N is compared to the total number of knobs. In the exemplary embodiment of the present invention depicted in FIG. **13**B, four (4) adjusters **1312** are provided. Consequently, in the present embodiment, if the value of variable N is less than or equal to the value of four (4), then one or more adjusters **1312** have not yet been processed. Therefore, process **1100** proceeds to **1110** and continues to process the next adjuster (i.e., the adjuster having a variable N value equal to the current value of variable N). Alternatively, if the value of variable N is greater than four (4), then the position of each adjuster **1312** has been read and processed, and process **1100** returns to step **1104**. At **1104**, the value of variable N is reset to zero (0) to allow steps **1104** through **1124** to be repeated for all adjusters **1312** beginning with the adjuster **1312** having a variable N value of one (1).

Next, at step **1110**, the position of the adjuster **1312** corresponding to the current value of N is read. As discussed in greater detail above with regards to FIGS. **13**A and **13**B, in the exemplary embodiment of the present invention depicted herein, each adjuster **1312** is a knob coupled to a dedicated adjuster ADC **1314**, the latter of which is coupled to recorder local control unit **1310**. As a user turns the knob of an adjuster **1312** in a clockwise or counterclockwise direction, the electrical resistance of its variable resistor changes. At step **1110**, adjuster ADC **1314** measures the voltage across each adjuster **1312** and converts it to a numeric digital value. More specifically, adjuster ADC **1314** measures the voltage across a wiper of adjuster **1312** and converts it to a numeric digital value corresponding to the measured level of voltage. This digital value is then read by recorder local control unit **1310**, and it corresponds to the gain desired by the user. However, alternate methods of reading a gain value desired by a user may be substituted without departing from the scope of the present invention. For example, a user may set a desired gain value via a touch screen (i.e., a display screen that is sensitive to the touch of a finger, stylus, or the like). In such an embodiment, since a touch screen is a digital device, the recorder local control unit may directly read the digital information entered by the user via the touch screen.

In one embodiment of the present invention, the absolute gain able to be set by a particular adjuster **1312** is limited to a range of possible values to prevent an erroneous setting that might severely impact the quality of the audio received from a particular microphone. That is, the position of each adjuster **1312** is limited to a value between an absolute lowest gain and an absolute highest gain. These limits may be incorporated using a plurality of methods. For example, physical stops may be incorporated to prevent an adjuster **1312** from exceeding a predetermined allowed physical rotation. Alternatively, electrical high and low limits may be applied to adjuster ADC to prevent its output from exceeding, or falling below, predetermined limits. Or, recorder local control unit **1310** may be programmed to override a value received from **1314** when it exceeds, or falls below, a predetermined limit. In such a scenario, recorder local control unit **1310** may defer to a pre-programmed fallback value. Other methods may also be substituted without departing from the scope of the present invention.

Process **1100** then proceeds to step **1112**, at which it is determined whether the current adjuster **1312** is set to local or remote trim mode. As discussed above in greater detail, in the depicted embodiment of the present invention, each adjuster **1312** is associated with a respective recorder audio input device port **1318**. When an adjuster **1312** is set to local trim mode, the respective adjuster **1312** is modifying the gain of the audio received from the audio input device connected to its respective audio input device port **1318**. Conversely, when an adjuster **1312** is set to remote trim mode, the respective adjuster **1312** is modifying the gain of the audio received from the audio input device **314** (FIG. **3**A) connected to the local audio device **102** associated with the particular adjuster **1312**.

If step **1112** determines that the current adjuster **1312** is set to remote trim mode, process **1100** proceeds to step **1114**. At step **1114**, the particular adjuster **1312** associated with the current value of N is correlated to a unique local audio device **102**. In our exemplary embodiment of the present invention, the local audio device **102** associated with the adjuster **1312** having the current value of N is simply the local audio device **102** having a unit ID equivalent to the value of N. That is, if the current value of N is one (1), the corresponding adjuster is **1312***a* as discussed above and the corresponding local audio device **102** is the one that has a unit ID of one (1). Therefore, when adjuster **1312***a* is indexed to remote trim mode, it will remotely adjust the gain of the audio received from audio input device **312** (FIG. **3**A) of the local audio device **102** assigned a unit ID of one (1). Similarly, when the value of N is two (2), the current adjuster is adjuster **1312***b*. And, when adjuster **1312***b* is indexed to remote trim mode, it will remotely adjust the gain of the audio received from audio input device **312** (FIG. **3**A) of the local audio device **102** assigned a unit ID of two (2) and so on. It should be noted that other methods of correlating an adjuster **1312** to a local audio device **102** may be substituted without departing from the scope of the present invention. Process **1100** then proceeds to **1116**.

At step **1116**, process **1100** combines the absolute value of the gain read from the current adjuster **1312**, the unit ID for the corresponding local audio device **102**, and other information to create a data packet for transmission to the corresponding local audio device **102**. The other information included in the data packet is described in greater detail below with respect to FIG. **12** and the format of an exem-

plary data packet is depicted in FIG. **14**. To create the data packet, all required data (See FIG. **14**) other than the checksum value is sent to a buffer of recorder **108**. Then the checksum value is calculated and appended to the data located in the buffer. The data is then transferred to a buffer of transmitter **208** of RCU **104** (See FIG. **2**A).

Next, at step **1118**, the data packet generated at step **1116** and contained in the buffer of transmitter **208** is transmitted to the corresponding local audio device **102** (as determined during step **1114**). In our exemplary embodiment of the present invention, RCU **104** is wired to timecode port **1320** of recorder **108**, and recorder **108** transmits the generated data packet through this wired connection for transmission wirelessly by RCU **104**'s RCU transmitter **208**. The data packet is received wirelessly at the corresponding local audio device **102** via its local receiver **302**, and it is processed as discussed in greater detail below with respect to FIG. **12**. Alternate embodiments of the present invention are envisioned in which data is transmitted via a different method including, but not limited to, wireless transmission directly from recorder **108** to the corresponding local audio device. Process **1100** then returns to step **1106**, at which the value of the variable N is incremented by one (1) and steps **1108** to **1122** are repeated.

If, at step **1112**, it is determined that the mode of the current adjuster **1312** is set to local trim mode, process **1100** proceeds to step **1120**. On recorder **108**, each adjuster **1312** has a corresponding audio input device port **1318**. When a particular adjuster **1312** is indexed to local trim mode, it will locally adjust the gain of the audio received from audio input device **1316** (FIG. **13**A) connected to the adjuster **1312**'s corresponding audio input device port **1318**. To do this, process **1100** first determines if the absolute value of the gain read from the current adjuster **1312** is different from the current gain value for the corresponding audio input device port **1318** as stored in recorder memory **1308**. If the gain read from the current adjuster **1312** is equal to the current gain value stored in recorder memory **1308** (i.e., no change in the gain value has occurred), then process **1100** returns to step **1106**, at which the value of the variable N is incremented by one (1) and steps **1108** to **1122** are repeated.

Conversely, if at **1120**, the gain read from the current adjuster **1312** is different than the current gain value stored in recorder memory **1308** (i.e., a change in the gain value has occurred), process **1100** proceeds to step **1122**. At **1122**, the gain value for the corresponding audio input device port **1318** is adjusted to the new value read from the current adjuster **1312**. The gain is adjusted via a gain adjustment circuit such as gain adjustment circuit **1326**. However, alternate methods of adjusting gain may be substituted without departing from the scope of the present invention. Also, gain may be adjusted incrementally (i.e., in upward and downward steps) rather than absolutely (i.e., setting gain to a specific value) without departing from the scope of the present invention.

Process **1100** then proceeds to **1124**, at which the new gain value is stored for comparison with future gain values received at a later time. Process **1200** then returns to **1106**, at which the value of the variable N is incremented by one (1) and steps **1108** to **1122** are repeated.

Process **1100** is executed whenever recorder **108** is receiving power via recorder power supply **1306** as described above. In this manner, process **1100** continuously repeats steps **1104** through **1124** in order to continually adjust all incoming audio with the most up-to-date gain values to optimize the quality of the audio recorded via recording system **100**.

In our exemplary embodiment, these commands are generated by a user at recorder **108**, however, alternate embodiments of the present invention are envisioned in which such commands are generated by another component of recording system **100** such as, but not limited to, mixer **109** as discussed in greater detail below.

Mixer **109** may be any commercially available mixing board such as, but not limited to, Zaxcom, Inc.'s Mix-8 or Mix-12 control surfaces. Such a mixer typically would include, inter alia, a plurality of audio input ports (e.g., microphone input ports), such as input device port **1318**, and a plurality of adjusters, such as adjuster **1312** for local adjustment of the gain, or amplification, of audio received via the audio input ports (e.g., from a microphone or the like connected thereto) generated at each local audio device **102**. Such a mixer may also include sliding potentiometers for local adjustment of the received audio amplification as is commonly known in the art. Additionally, mixer **109** may have the ability to adjust other qualities of the incoming audio (e.g., equalization, bass, treble, etc.) as is commonly known in the art and typically available with similar commercially available products. For example, mixer **109** may also control equalization of audio from each local audio device **102** to boost a certain range of frequencies (e.g., bass, treble, etc.) for improvement of audio quality.

Referring now to FIG. **12**, depicted is a process **1200** for receiving and executing commands at one or more local audio devices **102**. Specifically, the exemplary process depicted in FIG. **12** depicts a method for remotely controlling a specific local audio device **102**. A process such as exemplary process **1200** is executed by local control unit **310** (See FIG. **3**A) of local audio device **102** whenever the device is receiving power via local power supply **306**. Process **1200** is executed in sequence with the other processes performed by local control unit **310** as described in greater detail above.

Process **1200** begins at **1202** and proceeds to step **1204**. At **1204**, all local audio devices **102** are indexed to a unique unit ID. Indexing of a unit ID for a particular local audio device **102** may be performed locally by a user via manipulation of its respective keypad **320** or remotely via an RCU such as RCU **104** as discussed in greater detail above with respect to FIGS. **3**A/**3**B and FIGS. **2**A/**2**B, respectively. As also discussed above, the unit ID identifies the specific one of multiple local audio devices **102** that a user wishes to control. Setting the unit ID to a unique value ensures that the control signals transmitted by recorder **108** are received by the correct and intended local audio device **102**. That is, since each adjuster **1312** is assigned to a particular unit ID, recorder **108** is programmed to transmit and gain adjustments performed via a particular adjuster **1312** to the local audio device **102** having the unit ID to which the particular adjuster **1312** has been assigned. Or, alternatively, multiple local audio devices **102** may be assigned an identical unit ID code in order to control several local audio devices **102** with the same commands simultaneously as a group.

Next, process **1200** proceeds to step **1206**, at which a specific one of the local audio devices **102** receives a data stream via its local receiver **302** in a manner discussed in greater detail above with reference to FIG. **3**B. Although steps **1206** through **1224** will be discussed with respect to a specific one of the local audio devices **102**, all local audio devices simultaneously and independently perform these steps in the same manner.

In the embodiment of the present invention depicted in FIGS. **1**-**15**, the data stream received at the local audio device **102** includes a plurality of binary data packets that

are sixteen (16) bytes in length. In one embodiment, the data stream is sent by RCU **104**'s RCU transmitter **208** (as discussed in greater detail above with respect to FIG. **11**) at a rate of 2000 data packets per second via 2.4 GHz RF transmission. However, alternate embodiments of the present invention are envisioned in which the data stream is sent by at a different rate of packets per second and/or a different frequency. Also, although the depicted embodiment of the present invention transmits a data stream from recorder **108**, such a data stream may be alternatively created and/or transmitted from other components of recording system **100** including, but not limited to, mixer **109**.

At step **1208**, process **1200** begins parsing each data packet of the data stream received by local transmitter **308**. The data packets are sixteen (16) bytes in length and are comprised of a plurality of 16 bit words. That is, each data packet is a string of binary digits 128 characters in length divided into eight segments that are sixteen (16) bits (i.e., sixteen digits) or two (2) bytes in length. Local control unit **310** parses each segment of sixteen (16) digits as a word. As illustrated in FIG. **14**, one exemplary data packet includes eight word lengths of data and each word communicates specific information to local control unit **310** as further discussed below.

Process **1200** then proceeds to **1210**, at which it determines if the data packet is a control packet by parsing the first word of the data packet (i.e., word #0). The first word serves as a control word to indicate if the data packet is a control packet or some other packet including, but not limited to, a timecode packet (i.e., a packet utilized to transmit a master timecode between components of recording system **100**) or an audio packet (i.e., a packet utilized to transmit audio between components of recording system **100**). If all of the bits in word #0 are zero (0), then the data packet is a timecode packet and its purpose is to transmit a master timecode to local audio device **102**. If all of the bits in word #0 are one (1), then the data packet is a control packet and its purpose is to remotely control one or more functions of local audio device **102** as described in greater detail herein. Alternatively, if the bits of word #0 are some combination of zeros (0) and ones (1), then the data packet is an audio packet and it is placed in an audio first in first out ("FIFO") queue and sent to a decompression routine. At step **1210**, if word #0 of the data packet does not indicate that it is a control packet, process **1200** returns to step **1206** to parse the next data packet in the received data stream and the timecode or audio packet is processed by a separate process (not shown) executed by local control unit **310**.

Alternatively, if step **1210** determines that the data packet is a control packet, process **1200** proceeds to step **1212**. At step **1212**, process **1200** determines whether the data packet is a valid data packet. In the depicted embodiment, the validity of the data packet is verified by reading the eighth word (i.e., word #7) of the data packet. Word #7 includes a checksum value, which is a value used to ensure data within the data packet has been transmitted without error. The checksum value is created by calculating the binary values in a block of data using a predetermined algorithm and storing the result with the data. When the data is received by local audio device **102**, process **1200** calculates a new checksum using the same predetermined algorithm and compares the calculated result to the checksum value. If the calculated result does not match the checksum value, an error has occurred that has affected the validity of the data packet. An invalid data packet may occur, for example, if data is lost during RF transmission or if an error occurs in assembly of the data packet by recorder **108**. In such a scenario, process **1200** discards the data packet (i.e., it does not continue processing the data packet and it takes no action relative to the data packet) and returns to step **1206** to parse the next data packet in the received data stream. Alternatively, if, at **1212**, the data packet is found to be valid because the calculated result matches the checksum value, process **1200** proceeds to **1214**. Although the depicted embodiment of the present invention utilizes a checksum method of validating the data packet, other methods including, but not limited to, the CRC method may be substituted without departing from the scope of the present invention.

At step **1214**, process **1200** determines if the data packet is a duplicate data packet that has previously been received and processed by local audio device **102**. In the depicted embodiment of the present invention, all control data packets are transmitted two or more times to ensure reception by the intended local audio device **102**. For instance, if a control data packet is received with an incorrect check sum as described in the previous step, it is discarded and its command is not processed by local control unit **310**. Therefore, multiple transmissions of identical control data packets facilitate the likelihood that the intended local audio device **102** receives and processes all command data packets. Process **1200** incorporates a tag value to identify duplicate data packets. That is, the tag value for each new control data packet is incremented while each duplicate control data packet has an identical tag value to its original control data packet. In the depicted embodiment of the present invention, the third word (i.e., word #2) of each command data packet indicates the tag value. The first nibble of this word is always equal to F and the second nibble of this word is set equal to the tag value. The first nibble of this word is set to F as a placeholder. That is, the value of F simply fills this portion of the word until it takes on a specific purpose in future upgrades of the invention. Process **1200** reads the second nibble (i.e., bits **5-8**) of the third word of the control data packet and compares the tag value to the tag value of the previously received control packet. If the tag value of the current control data packet is identical to the tag value of a previously received control data packet, process **1200** discards the control data packet (i.e., it does not continue processing the data packet and it takes no action relative to the data packet) and returns to step **1206** to parse the next data packet in the received data stream. Alternatively, if, at **1214**, the data packet is found to be a new control data packet having a different tag value than the previously processed data packet, process **1200** proceeds to **1216**. Although the depicted embodiment of the present invention utilizes a tag value method of identifying duplicated control data packets, other methods may be substituted without departing from the scope of the present invention.

At **1218**, process **1200** determines if the control data packet includes a command for the specific local audio device **102** processing the control data packet. That is, process **1200** reads the second word (i.e., word #1) of the control data packet to determine the unit ID of the local audio device **102** for which the control data packet is intended. The read unit ID is compared to the unit ID of the local audio device **102** processing the control data packet to determine if they are identical. If yes, the control data packet is intended for the processing local audio device **102** and it is processed. If no, the control data packet is intended for another local audio device **102** and it is discarded. Every data packet received by a single local audio device **102** may not be applicable to that device. For example, if a gain adjustment is made at adjuster **1312***b* and the local audio device **102** receiving the control data packet is assigned to

adjuster **1312***a*, then the control data packet is not intended for that local audio device **102** and it is discarded.

If it is determined that the control data packet is intended for a different local audio device **102** than the one processing the control data packet, process **1200** discards the data packet (i.e., it does not continue processing the data packet and it takes no action relative to the data packet) and returns to step **1206** to parse the next data packet in the received data stream. Alternatively, if, at **1218**, it is determined that the received control data packet is intended for the processing local audio device **102**, process **1200** proceeds to **1220**. Although the depicted embodiment of the present invention utilizes a comparison method of ensuring the received control data packet is intended for the processing local audio device **102**, other methods may be substituted without departing from the scope of the present invention.

Next, at step **1220**, process **1200** determines what type of command is to be performed. Process **1200** determines the type of command by reading the data string contained in the second byte of word #2 through word #6 of the data packet. The data string begins with the command to be performed. For example, if the data string begins with UBCMD_GAIN, then the command is a gain adjustment command. In this scenario, the data following UBCMD_GAIN in the data string indicates the absolute numerical value of the new gain setting, and the data string is null terminated to indicate the end of the string. Once process **1200** has read the type of command present in the data string, process **1200** proceeds to **1222** to further process the command.

At **1222**, the command read in step **1220** is processed. The steps involved in processing the command will vary based upon the type of command. In our exemplary embodiment in which the command is an adjust gain command, the new gain value contained in the data string of the current data packet is compared to the existing gain value stored in memory **332** of the respective local audio device **102**. If the two values are identical, no adjustment is required and process **1200** returns to step **1206** to parse the next data packet in the received data stream. Alternatively, if, at **1222**, it is determined that the new gain value is different from the existing gain value stored in memory **332** of the respective local audio device **102**, the gain value for the respective local audio device **102** is adjusted to the new value received wirelessly in steps **1206** through **1220**. The gain is adjusted by extracting the gain change byte (i.e., the byte of data associated with word #3) from the data string and converting it to a voltage to be transmitted to gain adjustment circuit **1326** as discussed in greater detail above with respect to FIG. **3**A. The voltage to which it is converted may be obtained from a look up table or the like that correlates the value in the gain change byte to a specific voltage that will effect the desired gain change. However, alternate methods of adjusting gain may be substituted without departing from the scope of the present invention. Also, gain may be adjusted incrementally (i.e., in upward and downward steps) rather than absolutely (i.e., setting gain to a specific value) without departing from the scope of the present invention.

After the command received in the data string is processed, process **1200** proceeds to **1224** at which data associated with the processed command, if any, is stored in memory **332**. In our gain adjustment example, the new gain value is stored for comparison with new gain values received at a later time. Process **1200** then returns to **1206** to parse the next data packet in the received data stream.

In the depicted embodiment of the present invention, commands other than a UBCMD_GAIN may be incorporated in a command data packet for receipt and processing by an intended local audio device **102**. For example, three such commands include the UBCMD_SCENE, UBCMD_TAKE and UBCMD_REEL commands. These commands transmit the name of the scene, the take number, or the reel number from recorder **108** to the intended local audio device **102**. The name of the scene is the title of the scene as determined by a producer or other production personnel. The take number is the numerical designator that identifies the current take being filmed. The reel number indicates the numerical designator that identifies the medium upon which the video being filmed is recorded (e.g., a reel, CD, DVD, etc.). When this information is transmitted to the local audio devices **102**, they can incorporate the data in audio packets to facilitate later identification of the audio packet and/or matching of the audio packet to the appropriate video data. That is, since the video being recorded simultaneously with the audio is labeled with scene, take, and reel identifiers, labeling recorded audio with the same identifiers allows the video and audio to be more easily combined post-recording.

After process **1200** reads a UBCMD_SCENE, UBCMD_TAKE or UBCMD_REEL command at step **1220**, it proceeds to step **1222**, at which it processes this command. Processing of the command includes reading the data that follows the command in the data string to determine the name or number of the scene, take, or reel, respectively. Process **1200** then proceeds to **1224**, at which the read data is saved to memory **332** in a predetermined location associated with the particular data to be saved thereto. Once the data is saved to the predetermined location, process **1200** returns to **1206** to parse the next data packet in the received data stream. Saving of the scene, take, and/or reel data to memory **332** allows the process executed by local control unit **310** in which audio packets are created to retrieve the data during the audio packet creation process for incorporation in the audio packet.

Another exemplary command that may be incorporated in a command data packet for receipt and processing by an intended local audio device **102** is UBCMD_SEGNUM. This command transmits the numerical designator that identifies the audio segment to the intended local audio device **102**. In the depicted embodiment of the present invention, the segment number is assigned in sequential order to each new audio segment, and it may be utilized, for example, for segmentation of large audio files as discussed above with respect to FIGS. **9** and **10**. However, other methods of assigning numerical identifiers may be substituted without departing from the scope of the present invention.

After process **1200** reads a UBCMD_SEGNUM command at step **1220**, it proceeds to step **1222**, at which it processes this command. Processing of the command includes reading the data that follows the command in the data string to determine the segment number. Process **1200** then proceeds to **1224**, at which the read data is saved to memory **332** in a predetermined location associated with the current segment number. Once the data is saved to the predetermined location, process **1200** returns to **1206** to parse the next data packet in the received data stream. Saving of the segment number to memory **332** allows the process executed by local control unit **310** in which audio packets are created to retrieve the data during the audio packet creation process for incorporation in the audio packet.

Yet another exemplary command that may be incorporated in a command data packet for receipt and processing by an intended local audio device **102** is UBCMD_TRANSPORT. This command transmits the transport mode of a local audio device **102** to the intended local audio device

102. In the depicted embodiment of the present invention, the transport mode may be play, record, or stop. The transport mode is determined by a user of audio recorder 108. However, other methods of assigning a transport mode to a local audio device 102 such as, but not limited to, automatically assigning such modes may be substituted without departing from the scope of the present invention.

After process 1200 reads a UBCMD_TRANSPORT command at step 1220, it proceeds to step 1222, at which it processes this command. Processing of the command includes reading the data that follows the command in the data string to determine the whether the transport mode is play, record, or stop. Process 1200 then proceeds to 1224, at which the read data is saved to memory 332 in a predetermined location associated with the current transport mode. Once the data is saved to the predetermined location, process 1200 returns to 1206 to parse the next data packet in the received data stream. Saving of the segment number to memory 332 allows a process executed by local control unit 310 in which transport mode is required to retrieve the data during execution of the process to allow the process to execute in accordance with the current transport mode. Examples of processes in which transport mode data is utilized include, but are not limited to, processes 400, 600 and 700 as described in greater detail above. For instance, step 412 of process 400 determines if the transport value is record and, if so, proceeds with operation of recording system 100 in a synchronous timecode generator mode as discussed in greater detail above with respect to FIG. 4. Similarly, step 712 of process 700 determines if the transport value is record and, if so, proceeds with operation of recording system 100 in asynchronous timecode generator mode as discussed in greater detail above with respect to FIG. 7. A transport mode value of play may be utilized, for example, by process 600 in step 610 to determine if playback of audio has been requested by recorder 108 due to a loss of audio as discussed in greater detail above with respect to FIG. 6.

UBCMD_CHANNEL is another exemplary command that may be incorporated in a command data packet for receipt and processing by an intended local audio device 102. This command transmits the frequency at which the receiving local audio device 102 should operate. In the depicted embodiment of the present invention, this frequency is transmitted as a four digit value. For example, a frequency of 5555 indicates that the desired RF frequency is 555.5 MHz. The desired frequency is determined by a user of recording system 100 based upon the frequency at which the least interference will be encountered. However, other methods of assigning a frequency to a local audio device 102 such as, but not limited to, automatically assigning such frequencies may be substituted without departing from the scope of the present invention.

After process 1200 reads a UBCMD_CHANNEL command at step 1220, it proceeds to step 1222, at which it processes this command. Processing of the command includes reading the data that follows the command in the data string to determine the desired frequency. Local control unit 310 transmits a numerical value corresponding to the desired frequency to a direct digital synthesizer ("DDS"). The DDS compares the received frequency data to the existing frequency at which the local audio device 102 is operating. If they are equal, no change is made. If they vary, the DDS adjusts the frequency at which local transmitter 308 is operating via a phase-locked loop.

Process 1200 then proceeds to 1224, at which the new frequency data is saved to memory 332 in a predetermined location associated with operating frequency. Once the data is saved to the predetermined location, process 1200 returns to 1206 to parse the next data packet in the received data stream.

Yet another exemplary command that may be incorporated in a command data packet for receipt and processing by an intended local audio device 102 is UBCMD_IFBMIX. This command transmits the ration of amplification of remotely and locally received audio. In the depicted embodiment of the present invention, this ratio is the amplification of locally received audio (i.e., audio received via audio input device port 314 divided by the amplification of remotely received audio (i.e., audio received via local receiver 302 such as audio received from RCU 104 as described in greater detail above). This amplification ratio is adjusted by a user of recording system 100. However, other methods of adjusting the amplification ratio such as, but not limited to, automatically assigning such ratio may be substituted without departing from the scope of the present invention.

After process 1200 reads a UBCMD_IFBMIX command at step 1220, it proceeds to step 1222, at which it processes this command. Processing of the command includes reading the data that follows the command in the data string to determine the amplification ratio. Process 1200 then proceeds to 1224, at which the read data is saved to memory 332 in a predetermined location associated with the amplification ratio. Once the data is saved to the predetermined location, process 1200 returns to 1206 to parse the next data packet in the received data stream. Saving of the amplification ratio to memory 332 allows a process executed by local control unit 310 in which the level of amplification of remotely generated audio is adjusted relative to the level of amplification of locally generated audio.

Turning now to FIGS. 16-18, depicted are processes 1600 and 1700 and circuitry 1800 for automatically adjusting the power output of one or more local audio devices such as local audio devices 102 described above. It may be advantageous to make such power output adjustments for a variety of reasons including, but not limited to: reduction in the size, weight, and/or heat produced by a local audio device; elimination or minimization of health risks to a wearer of the local audio device (such as those caused by exposure to the heat generated by the device when worn and/or constant body exposure to high power radio frequency waves); reduction in RF emissions; reduction in interference between a plurality of local audio devices (due to reducing the power output of those devices not in use, thereby eliminating or minimizing their ability to interfere with in use devices); and conservation of battery power/life due to decreased power consumption.

FIG. 16 depicts a process for automatically creating and transmitting high and low power commands used to adjust the power output of one or more local audio devices. Process 1600 begins at 1602, at which a system such as system 100 is in the process of recording as described above. In the exemplary embodiment described herein, process 1600 is executed by a control unit such as recorder control unit 1310 as described above with respect to FIGS. 13A and 13B. However, alternate embodiments of the present invention are envisioned in which process 1600 is executed by hardware, a combination of hardware and software, and/or by a component of system 100 other than recorder 108.

After 1602, process 1600 proceeds to step 1604, at which the status of the record mode is queried. In the depicted embodiment, the internal record status of a recorder such as recorder 108 is queried to determine if is currently recording. Initiation and cessation of recording may be performed

by a user in any one of a variety of ways including, but not limited to, a local control panel integral to the recorder and via a remote control unit such as, for example, remote control unit **104** as described above with reference to FIGS. **2**A and **2**B. In the depicted embodiment, recording is enabled or disabled by indexing switches (e.g., the flat illuminated pushbuttons **1313***e* and **1313***g* as discussed above with respect to FIG. **13**B) to recording or non-recording mode. The status of the switch is read directly by the recorder's local control unit (e.g., recorder control unit **1310**).

If process **1600** determines that the recorder is not currently recording, process **1600** proceeds to **1606**, at which it generates a low power command to be transmitted to all local audio devices. The low power command may be encoded for transmission along with other commands and/or audio data via a data packet (e.g., the data packet depicted in FIG. **14** as discussed above) or it may be a dedicated command sent individually (e.g., in the form of the data packet depicted in FIG. **14** as discussed above). In embodiments in which all of the local audio devices are switched to low or high power, the low power command may simply notify the local audio device that the recorder is not in record mode. Compatible local audio devices are pre-programmed to read this record status and index themselves to low power mode as discussed below. It is important to note that low power may be any power level less than the current high power level including, but not limited to, zero power. Conversely, high power may be any power level higher than the current low power level.

Process **1600** then proceeds to **1608**. In the depicted embodiment, the low power command(s) are transmitted to all local audio devices via an RF transmitter. The RF transmitter may be integral to the recorder or it may be integral to another device coupled to the recorder, for example, a receiver such as receiver **106**. However, alternate embodiments are envisioned in which the low power command(s) are transmitted in a manner other than RF including, without limitation, via a hardwired link or via a non-RF transmitter. Also, alternate embodiments are envisioned in which low power command(s) are sent to a predetermined subset of the local audio devices rather than all local audio devices.

Alternatively, if at **1604**, it is determined that the recorder is recording, process **1600** proceeds to **1614** at which process **1600** then queries the recording status of one, all, or some subset of the local audio devices (e.g., local audio devices **102**) that are a part of the recording system (e.g., system **100**). In one embodiment of the present invention, this query is performed by determining status parameters within the recorder to determine which local audio devices are currently recording. For example, if an event being recorded has (4) individuals each equipped with his or her own dedicated local audio device, the final recording will have four (4) audio inputs recorded by the recorder. However, the number of individuals in any given scene or portion of the event may be less than four (4). In a scene in which, for example, only two (2) individuals are being recorded, the recorder is manually programmed to record two inputs rather than four inputs. In such a scenario, the local audio devices that are not being recorded may be indexed to low power.

In the exemplary embodiment of the present invention, the record status for each track is determined via an audio input/output routing table, wherein each input is associated with a particular local audio device. The association of inputs to local audio devices is typically a 1:1 ratio, and it is programmed by a sound engineer or the like at the recorder prior to recording. In such embodiments, whether a local audio device is in recording mode may be determined by querying the input/output routing table to determine whether the input associated with the local audio device is being routed to an output. If yes, the local audio device is determined to be in recording mode. If the input is not being routed to an output, then the local audio device associated with that input is determined to not be in recording mode. However, alternate methods of determining the recording status of each local audio device may be substituted without departing from the scope of the present invention.

At step **1614**, process **1600** reads the actual tracks being recorded for the particular scene or portion of the event to identify those local audio devices in use for the particular scene/portion. This allows the high power command created in step **1616** to be sent only to those local audio devices currently utilized, which allows the local audio devices that are not in use for that scene to remain at low power. Allowing unused local audio devices to remain at low power has many advantages including, but not limited to: elimination or minimization of interference and/or intermodulation; reduction in the size, weight, and/or heat produced by a local audio device; elimination or minimization of health risks to a wearer of the local audio device; reduction in RF emissions; reduction in interference between a plurality of local audio devices; and conservation of battery power/life. Intermodulation is the undesirable mixing of RF signals that is typically caused by receiver overload (or recorder overload in cases in which the receiver is integral to the recorder). Intermodulation is minimized or eliminated since the signals at low power are less likely to mix with the signals indexed to high power. Furthermore, interference is reduced by eliminating or minimizing RF communication between the recorder transmitter (or the transmitter of a receiver coupled to the recorder) and all local audio devices whose audio tracks are not currently being recorded.

In an alternate embodiment, process **1600** determines the local audio devices to be set to high power (i.e., those currently recording) by polling the devices via one or more commands sent via RF transmission or the like. Such commands may query the record status or other status of the local audio device to determine whether to index the local audio device to high or low power. Or, in more complicated embodiments, specific data relevant to power requirements of the local audio device may be stored in one or more registers of the local audio device for query by process **1600**. That is, local audio device may be specifically programmed to direct the recorder as to the optimal power requirement as determined by the other operating parameters of the local audio device, which allows the recorder software to create a command specific to the local audio device to direct it to its optimum performance level.

In yet another simplified alternate embodiment, step **1614** may be eliminated. In such an embodiment, only the record status of the recorder is queried without regard for which audio inputs are being individually recorded and/or which local audio devices are being recorded. In this embodiment of the invention, all local audio devices are commanded to high power whenever the recorder is in record mode (i.e., any or all inputs are being recorded by the recorder as determined at step **1604**). In such an embodiment, the high and low power commands broadcast the record status of the recorder (i.e., disabled or enabled), and the local audio devices are programmed to automatically read the recorder's record status and adjust their power to low (when recording is disabled) or high (when recording is enabled).

Once process **1600** has determined which local audio devices will receive a high power command, process **1600** proceeds to **1616** at which the high power command(s) are generated. The high power command may be encoded for transmission along with other commands and/or audio data via a data packet (e.g., the data packet depicted in FIG. **14** as discussed above) or it may be a dedicated command sent individually via a data packet or the like (e.g., in the form of the data packet depicted in FIG. **14** as discussed above). In embodiments in which all of the local audio devices are switched to low or high power, the high power command may simply notify the local audio device that the recorder is in record mode. Compatible local audio devices are pre-programmed to read this record status and index themselves to high power mode as discussed below. Also, in embodiments of the present invention in which less than all of the local audio devices may receive a high power command, the command may be packaged with a local audio device identifier such as a unit identification number or the like. This allows each local audio device to determine whether a specific high (or low) power command is intended for that specific local audio device.

Process **1600** then proceeds to step **1608**, at which the generated high power command(s) are transmitted to the local audio devices for processing by those local audio devices selected in step **1614**. Step **1608** is described in greater detail above. However, alternate simpler embodiments are also envisioned in which all local audio devices are sent high power command(s) whenever the recorder is in recording mode.

After step **1608**, process **1600** returns to **1604** and again queries the record status of the recorder. That is, process **1600** continually runs during the operation of a system such as system **100** to continuously and dynamically adjust the power outputs thereof for maximum efficiency. This also ensures that any local audio devices that have been indexed to low power output are immediately indexed back to high power output if the audio input associated with those local audio devices is switched to recording mode by a sound engineer or other user of the recorder.

In the exemplary embodiment discussed herein, a user may index a recorder such as recorder **108** to one of three modes: enable automatic power control feature (i.e., allow power to be dynamically adjusted between low and high as described herein with respect to FIGS. **16-18**); index all local audio devices to high power (i.e., all local audio devices are indexed to high power by, for example, repeating steps **1616** and **1608** as described above without regard for recording status); and index all local audio devices to low power (i.e., all local audio devices are indexed to low power by, for example, repeating steps **1606** and **1608** as described above without regard for recording status). This allows a user to either manually control the power of the local audio devices via a recorder or to allow the recorder to automatically and dynamically adjust the local audio devices to low or high power.

Process **1700** depicts a process for receiving and processing a low or high power command at a local audio device such as local audio device **102**. In the exemplary embodiment described herein, process **1700** is executed by a control unit such as local control unit **310** as described above with respect to FIGS. **3**A and **3**B. However, alternate embodiments of the present invention are envisioned in which process **1700** is executed by hardware and/or a combination of hardware and software.

Process **1700** starts at **1702**, at which a low or high power command is received from an external device such as a recorder, remote control unit, or the like. Next, at **1704**, the low or high power command is processed. In the exemplary embodiment, the command is received via a local receiver such as local receiver **302** as described above with respect to FIGS. **3**A and **3**B, and it is decoded via a local control unit such as local control unit **310**, as also described above with respect to FIGS. **3**A and **3**B, to determine the necessary power level adjustments.

Next, at **1706**, the power output of the local audio device is adjusted. In the depicted embodiment, this is implemented by adjusting amplifier operating parameters including, but not limited to, voltage levels (e.g., bias and source voltage levels) and/or RF drive levels. One such method of adjusting these parameters is described below with respect to FIG. **18**. Turning now to FIG. **18**, depicted is an exemplary embodiment of a portion of a local transmitter circuit **1800** in accordance with one embodiment of the present invention. Transmitter circuit **1800** includes, inter alia, transistor **1802**, which receives analog audio from the local audio device's local control unit (e.g., local control unit **310**) after it has been converted to analog form by transmitter DAC **1812**. In one exemplary embodiment, transmitter DAC **1812** is a MAXI **850** high speed DAC as manufactured by Maxim Integrated Products. However, other compatible digital to analog converters may be substituted without departing from the scope hereof

Transistor **1802** amplifies the audio received from transmitter DAC **1812** and outputs same at point RFout **1806**. In the exemplary embodiment depicted in FIG. **18**, transistor **1802** is a pseudomorphic High Electron Mobility Transistor ("phEMT"); however, other compatible transistors or RF amplifier chips may be substituted. Also, in this exemplary embodiment, capacitors **1814**, **1816**, **1820**, **1822**, **1824**, **1828**, **1830**, **1832**, and **1834** have a fixed capacitance of 0.1 uF, 100 uF, 100 pF, 100 pF, 0.01 uF, 100 pF, 0.01 uF, 100 pF, and 10 uF, respectively, and resistor **1838** has a resistance of 20 ohms. The remaining capacitors, inductors, and resistors, namely capacitor **1826**, inductor **1838**, inductor **1840**, and inductor **1842** are initially set during manufacture to values of 100 pF, 22 nH, 12 nH, and 82 nH, respectively. Subsequently, during calibration of transmitter circuit **1800**, each of these values is modified as necessary to achieve an RF output of approximately 17+ dBm when in low power mode and approximately 21+ dBm when in high power mode. That is, the values of capacitor **1826**, inductor **1838**, inductor **1840**, and inductor **1842** of transmitter circuit **1800** are individually adjusted for each local audio device to achieve the correct dBm output levels as further discussed below. In this exemplary embodiment, low and high power commands may index the incoming analog audio signal received from transmitter DAC **1812** to approximately 4 dBm in high power mode and approximately 0 dBm in low power mode. That is, the local audio device's local control unit adjusts the level of the audio signal created by transmitter DAC **1812** via direct control of the parameters of transmitter DAC **1812** by local control unit **310**.

Additionally, in the depicted embodiment, high and low power commands may index the input voltage at V_0 **1810** to approximately 4.5V in high power mode and to approximately 3.5V in lower power mode. Low and high power commands may also index the gate voltage applied to point Vg **1808** to approximately 0.5 Vin high power mode and approximately 0.7 Vin low power mode. Adjustment of the voltage output of the input voltage at VO **1810** and the gate voltage at point Vg **1808** in combination with the factory calibrated values of capacitor **1826**, inductor **1838**, inductor **1840**, inductor **1842**, and resistor **1834** allow low and high

power commands to achieve an RF output of +21 dBm in high power mode and +17 dBm in low power mode. That is, when the components of transmitter amplification circuit are properly calibrated, the resulting value of the dBm RF output at **1806** is +17 dBm for low power mode and 21+ dBm for high power mode.

These values stated above are merely exemplary and alternate values may be substituted without departing from the scope hereof

Turning now to FIG. **19**, depicted is an alternate embodiment of a process **1900** for automatically creating and transmitting high and low power commands used to adjust the power output of one or more local audio devices. Process **1900** begins at **1902**, at which a system such as system **100** is in the process of recording as described above. In the exemplary embodiment described herein, process **1900** is executed by a control unit such as recorder control unit **1310** as described above with respect to FIGS. **13**A and **13**B. However, alternate embodiments of the present invention are envisioned in which process **1900** is executed by hardware, a combination of hardware and software, and/or by a component of system **100** other than recorder **108**.

After **1902**, process **1900** proceeds to step **1904** at which the channel variable "CH" is set to equal zero. Next, at step **1906**, process **1900** increments the current value of the CH variable by one. Next, at step **1908**, process **1900** determines if the value of the channel variable is greater than the total number of available channels. In the depicted embodiment, recorder **108** has the ability to record eight (8) channels or inputs. Additionally, each local audio device is assigned a channel identification number from one (1) to eight (8). Each value of the channel variable (i.e., 1, 2, 3, 4, 5, 6, 7, and 8) is associated with the recorder channel and local audio device having the same value. For example, when the value of the channel variable is 1, the process is generating low or high power commands for the local audio device that is assigned a channel identification number of 1. That is, as further discussed below, process **1900** uses the value of the channel variable to continually generate specific high or low power commands for each local audio device associated with the current channel. While the depicted embodiment includes eight (8) recording channels, alternate embodiments of the present invention are envisioned in which a greater or lesser number of recording channels may be substituted without departing from the scope thereof. Also, methods of selecting a local audio device other than a channel variable may be substituted.

As is further discussed below, as process **1900** is executed, steps **1906** through **1918** are repeated multiple times. Therefore, step **1908** is necessary to determine if the value of the channel variable has reached a value greater than the total number of available channels. In the depicted embodiment, if step **1908** of process **1900** determines that the value of the channel variable is greater than eight (8), then process **1900** returns to step **1904**, at which the channel variable is set to zero.

Alternatively, if at **1908** the value of the channel variable is not greater than eight, process **1900** proceeds to step **1910** at which the recording status of the local audio device associated with the current channel variable value is queried to determine if it is enabled for recording on the master recorder. In one embodiment, this is done by querying the recorder to determine if the channel is routed to an output as discussed above with respect to FIG. **16**. However, other methods of determining recording status may be substituted without departing from the scope of the present invention.

If, at **1910**, the status of the current local audio device is not enabled, process **1900** proceeds to **1914**, at which it generates a low power command to be transmitted to the local audio device associated with the current channel value. The low power command may be encoded for transmission along with other commands and/or audio data via a data packet (e.g., the data packet depicted in FIG. **14** as discussed above) or it may be a dedicated command sent individually (e.g., in the form of the data packet depicted in FIG. **14** as discussed above).

Process **1900** then proceeds to **1918**. In the depicted embodiment, the low power command is transmitted to the current local audio device via an RF transmitter. The RF transmitter may be integral to the recorder or it may be integral to another device coupled to the recorder, for example, a receiver such as receiver **106**. However, alternate embodiments are envisioned in which the lower power command(s) are transmitted in a manner other than RF including, without limitation, via a hardwired link or via a non-RF transmitter. Also, alternate embodiments are envisioned in which low power command(s) are sent to a predetermined subset of the local audio devices rather than to all local audio devices.

Alternatively, if step **1910** determines that the recording status of the local audio device associated with the current channel variable value is enabled as discussed above, process **1900** proceeds to step **1912**, at which the status of the recorder is queried. In the depicted embodiment, the internal record status of a recorder such as recorder **108** is queried to determine if it is currently recording. Initiation and cessation of recording may be performed by a user in any one of a variety of ways including, but not limited to, a local control panel integral to the recorder and via a remote control unit such as, for example, remote control unit **104** as described above with reference to FIGS. **2**A and **2**B. In the depicted embodiment, recording is enabled or disabled by indexing switches (e.g., the flat illuminated pushbuttons **1313***e* and **1313***g* as discussed above with respect to FIG. **13**B) to recording or non-recording mode. The status of the switch is read directly by the recorder's local control unit (e.g., recorder control unit **1310**).

If process **1900** determines that the recorder is not currently recording, process **1900** proceeds to **1914**, at which it generates a low power command to be transmitted to the local audio device associated with the current channel value as discussed above.

Alternatively, if at **1912**, it is determined that the recorder is recording, process **1900** proceeds to **1916** at which the high power command is generated. The high power command may be encoded for transmission along with other commands and/or audio data via a data packet (e.g., the data packet depicted in FIG. **14** as discussed above) or it may be a dedicated command sent individually via a data packet or the like (e.g., in the form of the data packet depicted in FIG. **14** as discussed above).

Process **1900** then proceeds to step **1918**, at which the generated high power command is transmitted to the current local audio device for processing. Step **1918** is described in greater detail above.

After step **1918**, process **1900** returns to **1906** and again increments the channel variable by one. This allows the local audio device indexed to the next greater channel number to be indexed to high or low power mode. Process **1900** continually runs during the operation of a system such as system **100** to continuously and dynamically adjust the power outputs thereof for maximum efficiency. This also ensures that any local audio devices that have been indexed

to low power output are immediately indexed back to high power output if the audio input associated with those local audio devices is switched to recording mode by a sound engineer or other user of the recorder. Although several processes have been disclosed herein as software, it is appreciated by one of skill in the art that the same processes, functions, etc. may be performed via hardware or a combination of hardware and software. Similarly, although the present invention has been disclosed with respect to wireless systems, these concepts may be applied to hardwired systems and hybrid hardwired and wireless systems without departing from the scope of the present invention.

It will be appreciated by those skilled in the art that changes could be made to the embodiments described above without departing from the broad inventive concept thereof his understood, therefore, that this invention is not limited to the particular embodiments disclosed, but it is intended to cover modifications within the spirit and scope of the present invention as defined by the appended claims.

We claim:

1. A system for locally recording locally generated audio as local audio data, and for simultaneously communicating transmitted audio data for remote recording as remotely recorded audio data, the transmitted audio data including local audio data or locally generated audio, the system comprising:

at least one local audio device wearable by a creator of the locally generated audio, the local audio device including:

at least one local audio input port for receiving the locally generated audio;

a local wireless transmitter for transmitting the transmitted audio data;

at least one local memory; and

at least one local control unit electrically coupled to the at least one local audio input device and the at least one local memory for creating the local audio data and storing the local audio data in the at least one local memory; and

at least one remote receiver adapted to communicate with the at least one local audio device, adapted to receive the transmitted audio data, and adapted to store the transmitted audio data or communicate the transmitted audio data to a remote recorder, for remotely recording the transmitted audio data as the remotely recorded audio data;

wherein the local audio data and the remotely recorded audio data are adapted to be combinable during or after generation of the locally generated audio by replacing at least one remote portion of the remotely recorded audio data with at least one local portion of the local audio data.

2. The system according to claim **1**,

wherein the at least one local control unit assigns at least one local timestamp to the local audio data;

wherein the at least one receiver assigns at least one remote timestamp to the remote audio data; and

wherein the at least one local timestamp and the at least one remote timestamp facilitate replacement of the at least one remote portion with the at least one local portion.

3. The system according to claim **2**, wherein the replacement of the at least one remote portion with the at least one local portion repairs the at least one remote portion of the remotely recorded audio data damaged due to a loss of transmission of the transmitted audio data.

4. The system according to claim **2**, wherein the at least one local timestamp, the at least one remote timestamp, or combinations thereof adhere to a SMPTE timecode format.

5. The system according to claim **1**,

wherein the at least one local control unit assigns at least one local timestamp to the local audio data;

wherein the remote recorder assigns at least one remote timestamp to the remote audio data; and

wherein the at least one local timestamp and the at least one remote timestamp facilitate replacement of the at least one remote portion with the at least one local portion.

6. The system according to claim **5**, wherein the replacement of the at least one remote portion with the at least one local portion repairs the at least one remote portion of the remotely recorded audio data damaged due to a loss of transmission of the transmitted audio data.

7. The system according to claim **1**, further comprising:

at least one remote control unit software adapted to communicate with the at least one local audio device, the at least one remote receiver, and combinations thereof.

8. The system according to claim **7**, wherein the at least one remote control unit software is configured to control at least one function of the at least one local audio device or the at least one receiver, the functions including: transmitting a time reference signal to the local audio device; transmitting a time reference signal to the remote receiver; transmitting digital commands to the local audio device; transmitting digital commands to the remote receiver; remotely controlling the local audio device; initiating audio playback of at least one local audio device; retrieving the local audio data from the at least one local audio device; synchronizing the local timecode generator of a device executing the at least one remote control unit software with at least one of the at least one local audio device; adjusting a gain of the at least one local control device; adding a track identifier to at least a portion of said local audio data; deleting said track identifier from at least a portion of said local audio data; altering said track identifier associated with at least a portion of said local audio data; adding said local audio device identifier to at least a portion of said local audio data; deleting said local audio device identifier from at least a portion of said local audio data; altering said local audio device identifier associated with at least a portion of said local audio data; adding said performer identifier to at least a portion of said local audio data; deleting said performer identifier from at least a portion of said local audio data; altering said performer identifier associated with at least a portion of said local audio data; adjusting a mode of the at least one local audio device or the at least one receiver; and combinations thereof.

9. The system according to claim **7**, the at least one local audio device further comprising:

at least one local audio device receiver for receiving digital data, time data, audio data, or combinations thereof, the at least one local audio device receiver coupled to the at least one control unit.

10. The system according to claim **9**, wherein the time data includes hour data, minute data, second data, SMPTE data, and combinations thereof.

11. The system according to claim **9**, wherein the digital data include setting data for the at least one local audio device.

12. The system according to claim **1**, wherein the at least one local audio device is at least one bodypack.

13. The system according to claim 1, wherein the creator of the locally generated audio is a live performer.

14. The system according to claim 1, wherein the at least one local audio device further includes:

at least one local audio output port.

15. The system according to claim 14, wherein the at least one local audio output port couples the at least one local audio device to the device executing the at least one remote control unit software.

16. A method of repairing remotely recorded audio data recorded by a remote receiver or a remote recorder, the remotely recorded audio data created from transmitted audio data received by a remote receiver, the remote receiver optionally coupled to the remote recorder, the method comprising the steps of:

locally receiving locally generated audio generated by at least one creator during an audio event;

locally recording the locally generated audio as local audio data in at least one local memory of at least one local audio device wearable by the creator of the local audio;

transmitting transmitted audio data, directly or indirectly, to a remote receiver, the transmitted audio data including the locally generated audio or the local audio data;

remotely receiving the transmitted local audio via the remote receiver;

recording the transmitted local audio as remotely recorded audio data at the at least one receiver or at the remote recorder;

retrieving the local audio data from the at least one local memory of the at least one local audio device during or subsequent to the audio event; and

replacing at least a remote portion of the remotely recorded audio data with at least a local portion of the local audio data.

17. The method according to claim 16, the method further comprising the step of:

locally receiving or generating master time data;

wherein the master time data includes at least one of hour data, minute data, second data, or combinations thereof.

18. The method according to claim 17, further comprising the step of:

indexing the local clock of the at least one local audio device or the at least one receiver to be synchronized with the master time data.

19. The method according to claim 16, wherein the at least one local audio device, the at least one receiver, or combinations thereof is at least one bodypack.

20. The method according to claim 16, further comprising:

adapting the local portion of the local audio data and the remote portion of the remotely recorded audio data to be combinable during or after generation of the locally generated audio;

wherein the adapting comprises:

incorporating local timecodes in the local portion of the local audio data,

incorporating remote timecodes in the remote portion of the remotely recorded audio data, and

matching the local timecodes of the local portion and the remote timecodes of the remote portion.

21. The method according to claim 20, wherein the local timecodes and the remote timecodes adhere to an SMPTE timecode format.

* * * * *