US 20110292018A1

(19) United States

(12) Patent Application Publication

KUBOTA et al.

(10) Pub. No.: US 2011/0292018 A1

(43) Pub. Date: Dec. 1, 2011

(54) LIQUID CRYSTAL DISPLAY DEVICE

(75) Inventors: **Hidenao KUBOTA**, Yokohama (JP); **Yasutaka Tsuru**, Yokohama (JP)

(73) Assignee: **HITACHI CONSUMER ELECTRONICS CO., LTD.**

(21) Appl. No.: **13/093,667**

(22) Filed: **Apr. 25, 2011**

(30) **Foreign Application Priority Data**

May 28, 2010 (JP) 2010-122957

Publication Classification

(51) **Int. Cl.**
G06F 3/038 (2006.01)
G09G 3/36 (2006.01)

(52) **U.S. Cl.** **345/211**; 345/102

(57) **ABSTRACT**

An area control section individually sets illumination intensity (light control value) of each backlight cell corresponding to each area of the display screen. A spatial filter corrects the light control values so that spatial distribution of the light control values becomes more moderate between adjoining areas. A black area control section sets the minimum value of the light control value based on a "black area" in the screen. A power control section corrects the light control values so that power consumption of the backlight does not exceed a limit value. A shading control section corrects the light control values to relatively lower brightness in the peripheral part of the screen compared to the central part of the screen. A micro-controller switches the operations of the above light control value correcting sections according to an image display mode selected by the user.

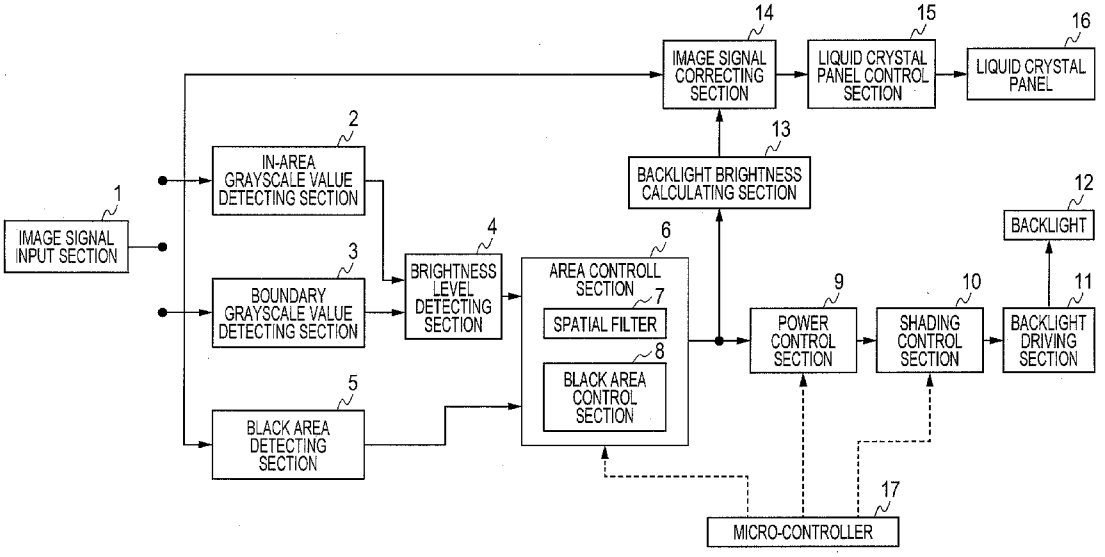

FIG. 1

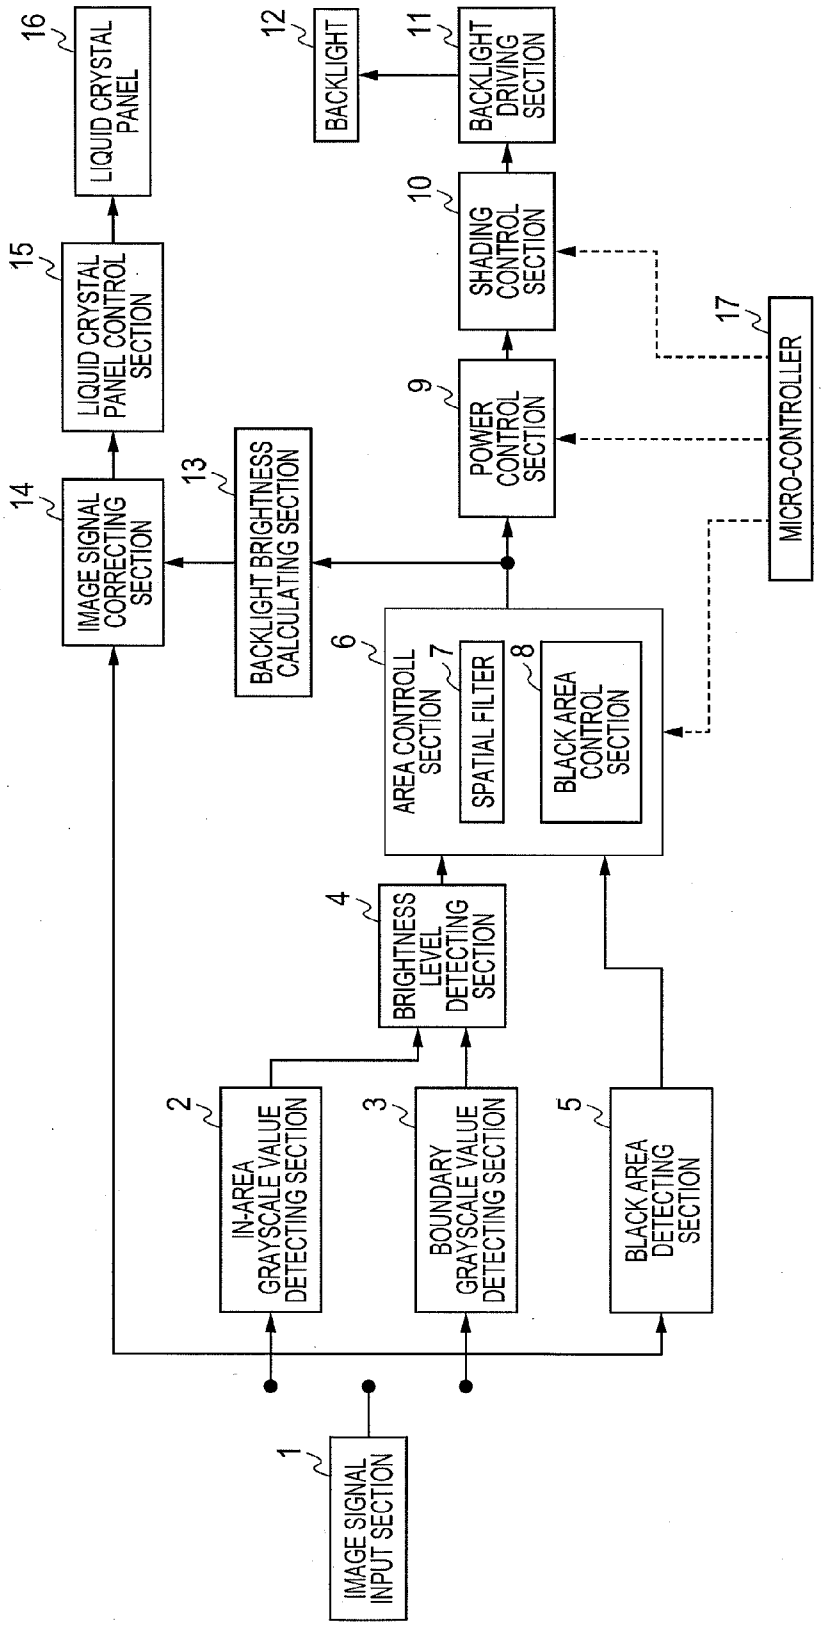
1
IMAGE SIGNAL INPUT SECTION
2
IN-AREA GRAYSCALE VALUE DETECTING SECTION
3
BOUNDARY GRAYSCALE VALUE DETECTING SECTION
5
BLACK AREA DETECTING SECTION
4
BRIGHTNESS LEVEL DETECTING SECTION
6
AREA CONTROLL SECTION
7
SPATIAL FILTER
8
BLACK AREA CONTROL SECTION
9
POWER CONTROL SECTION
10
SHADING CONTROL SECTION
11
BACKLIGHT DRIVING SECTION
12
BACKLIGHT
17
MICRO-CONTROLLER
13
BACKLIGHT BRIGHTNESS CALCULATING SECTION
14
IMAGE SIGNAL CORRECTING SECTION
15
LIQUID CRYSTAL PANEL CONTROL SECTION
16
LIQUID CRYSTAL PANEL

FIG. 2A

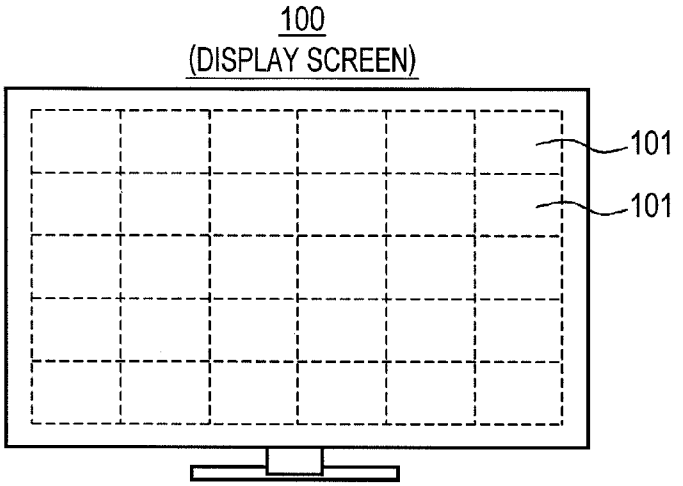

FIG. 2B

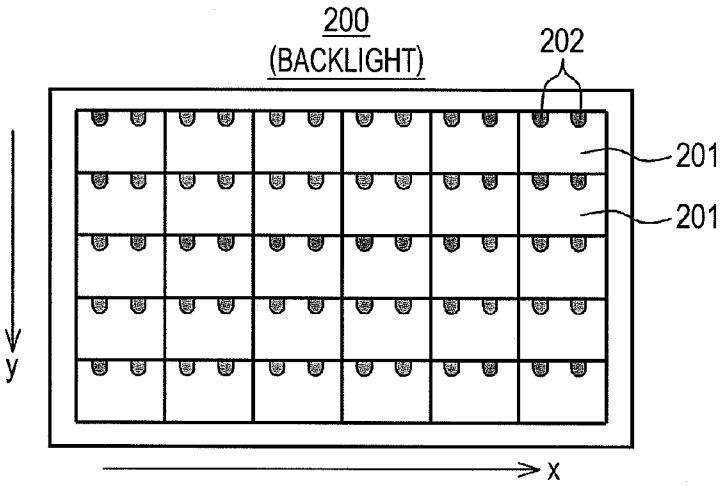

FIG. 3

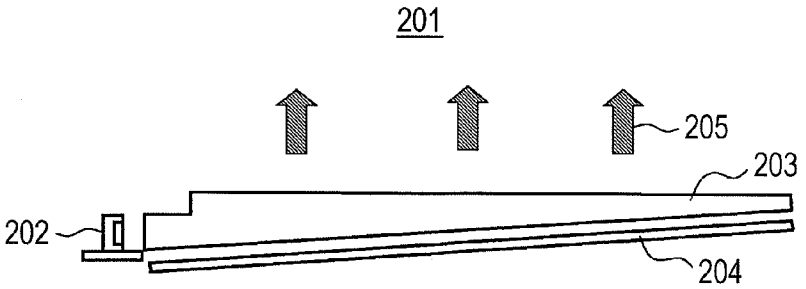

FIG. 4

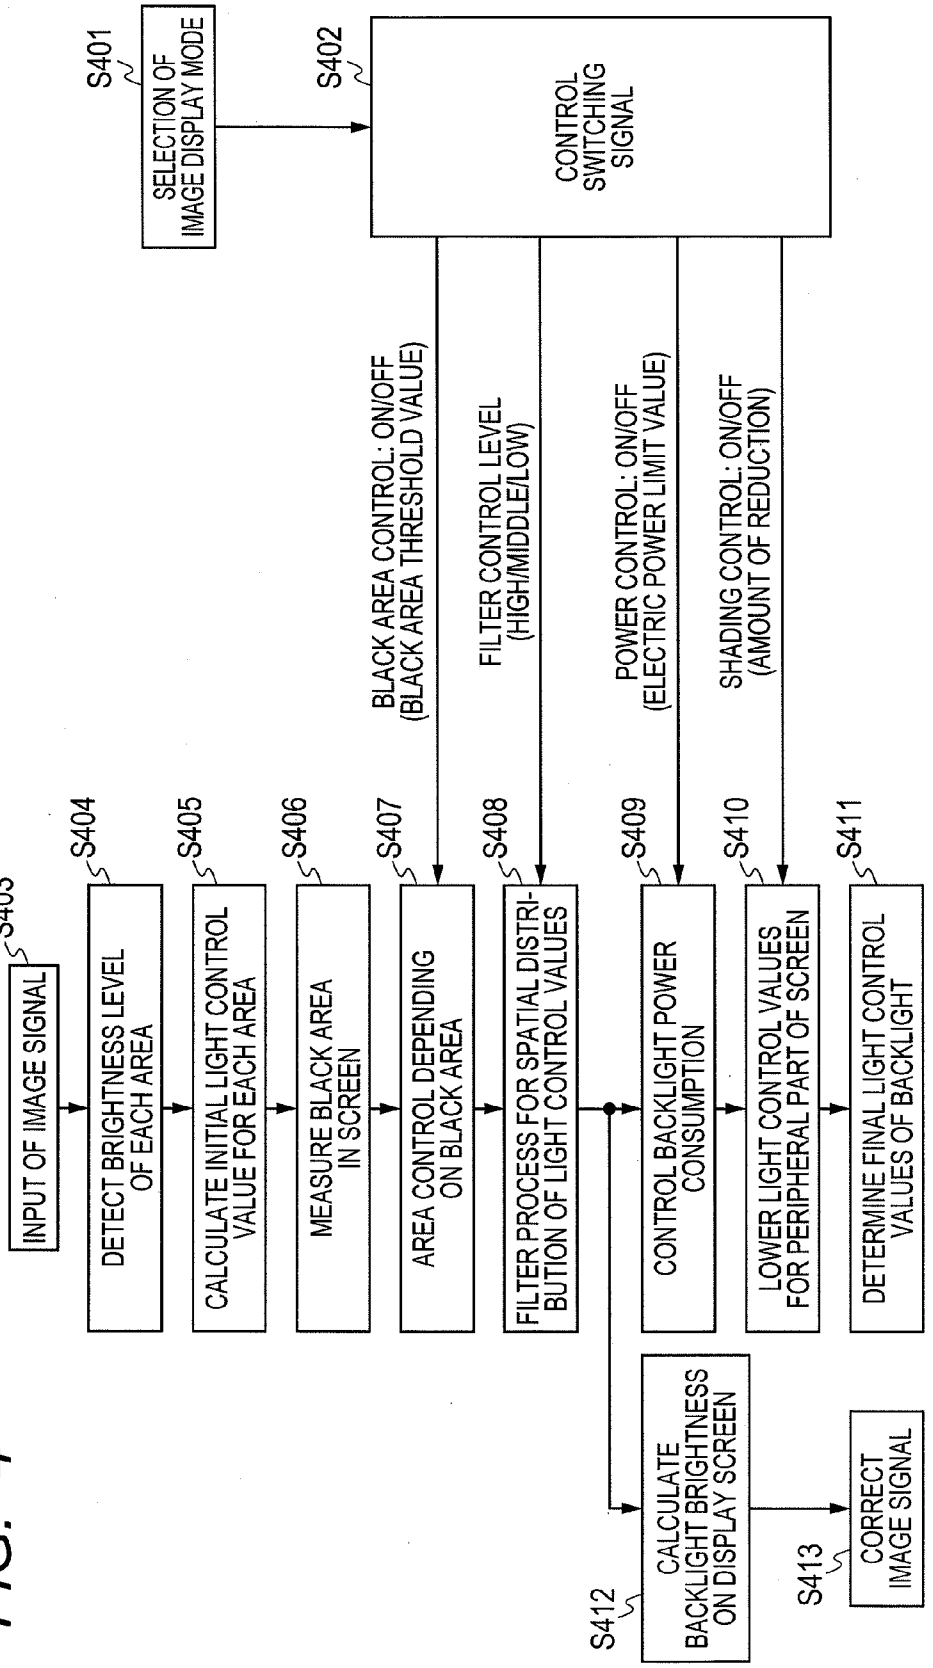
S401
SELECTION OF IMAGE DISPLAY MODE
S402
CONTROL SWITCHING SIGNAL
BLACK AREA CONTROL: ON/OFF (BLACK AREA THRESHOLD VALUE)
FILTER CONTROL LEVEL (HIGH/MIDDLE/LOW)
POWER CONTROL: ON/OFF (ELECTRIC POWER LIMIT VALUE)
SHADING CONTROL: ON/OFF (AMOUNT OF REDUCTION)
S403
INPUT OF IMAGE SIGNAL
S404
DETECT BRIGHTNESS LEVEL OF EACH AREA
S405
CALCULATE INITIAL LIGHT CONTROL VALUE FOR EACH AREA
S406
MEASURE BLACK AREA IN SCREEN
S407
AREA CONTROL DEPENDING ON BLACK AREA
S408
FILTER PROCESS FOR SPATIAL DISTRIBUTION OF LIGHT CONTROL VALUES
S409
CONTROL BACKLIGHT POWER CONSUMPTION
S410
LOWER LIGHT CONTROL VALUES FOR PERIPHERAL PART OF SCREEN
S411
DETERMINE FINAL LIGHT CONTROL VALUES OF BACKLIGHT
S412
CALCULATE BACKLIGHT BRIGHTNESS ON DISPLAY SCREEN
S413
CORRECT IMAGE SIGNAL

FIG. 5

BACKLIGHT CONTROL FUNCTIONS / IMAGE DISPLAY MODE	(1) SPATIAL FILTER CONTROL	(2) BLACK AREA CONTROL	(3) POWER CONTROL	(4) SHADING CONTROL
	HIGH, MIDDLE OR LOW	ON OR OFF BLACK AREA THRESHOLD VALUE WHEN ON	ON OR OFF ELECTRIC POWER LIMIT VALUE WHEN ON (90%, 75%)	ON OR OFF POWER REDUCTION VALUE WHEN ON (95%, 90%)
	HIGH (MIDDLE) LOW	BLACK AREA: SMALL / BLACK AREA: LARGE OFF ON	OFF ON	OFF ON
(a) IN-STORE DEMONSTRATION (SUPERMARKET)	LOW	ON	OFF	OFF OR ON (INCREASE POWER WHEN ON)
(b) POWER REDUCTION (STANDARD)	LOW	OFF	ON	ON
(c) HIGH IMAGE QUALITY (CINEMA)	HIGH OR MIDDLE	ON	OFF	OFF

FIG. 6A

600a

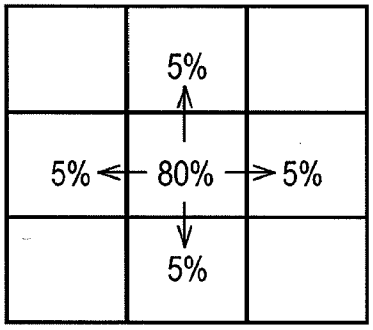

FIG. 6B

600b

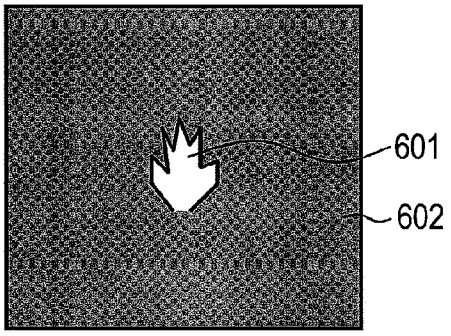

FIG. 6C

600c

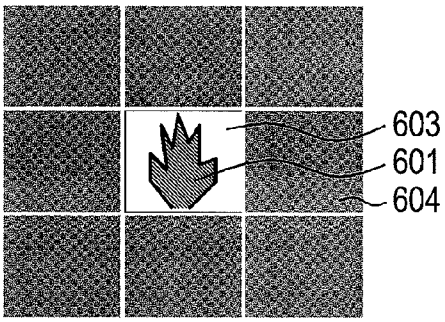

SPATIAL FILTER: STRONG

FIG. 6D

600d

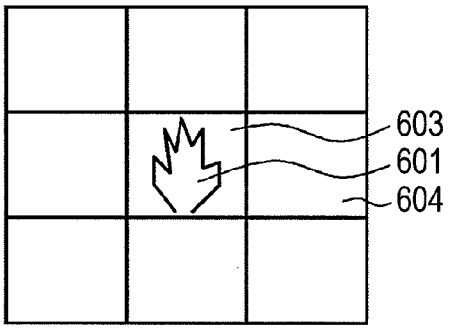

SPATIAL FILTER: WEAK

FIG. 7A

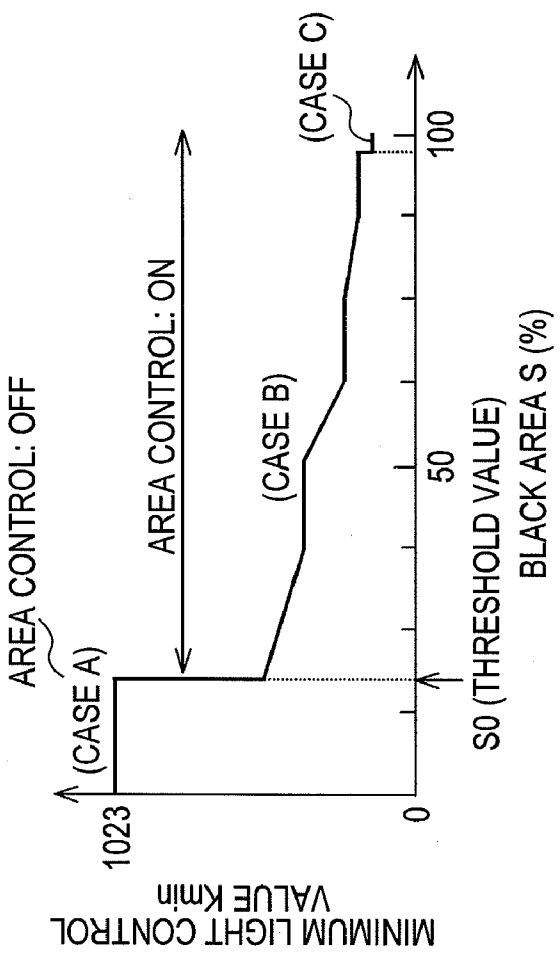

FIG. 7B

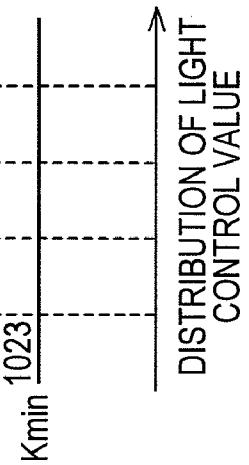

FIG. 7C

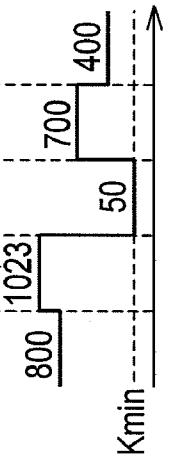

FIG. 7D

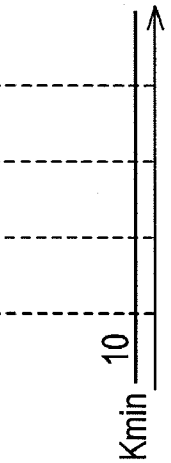

FIG. 8

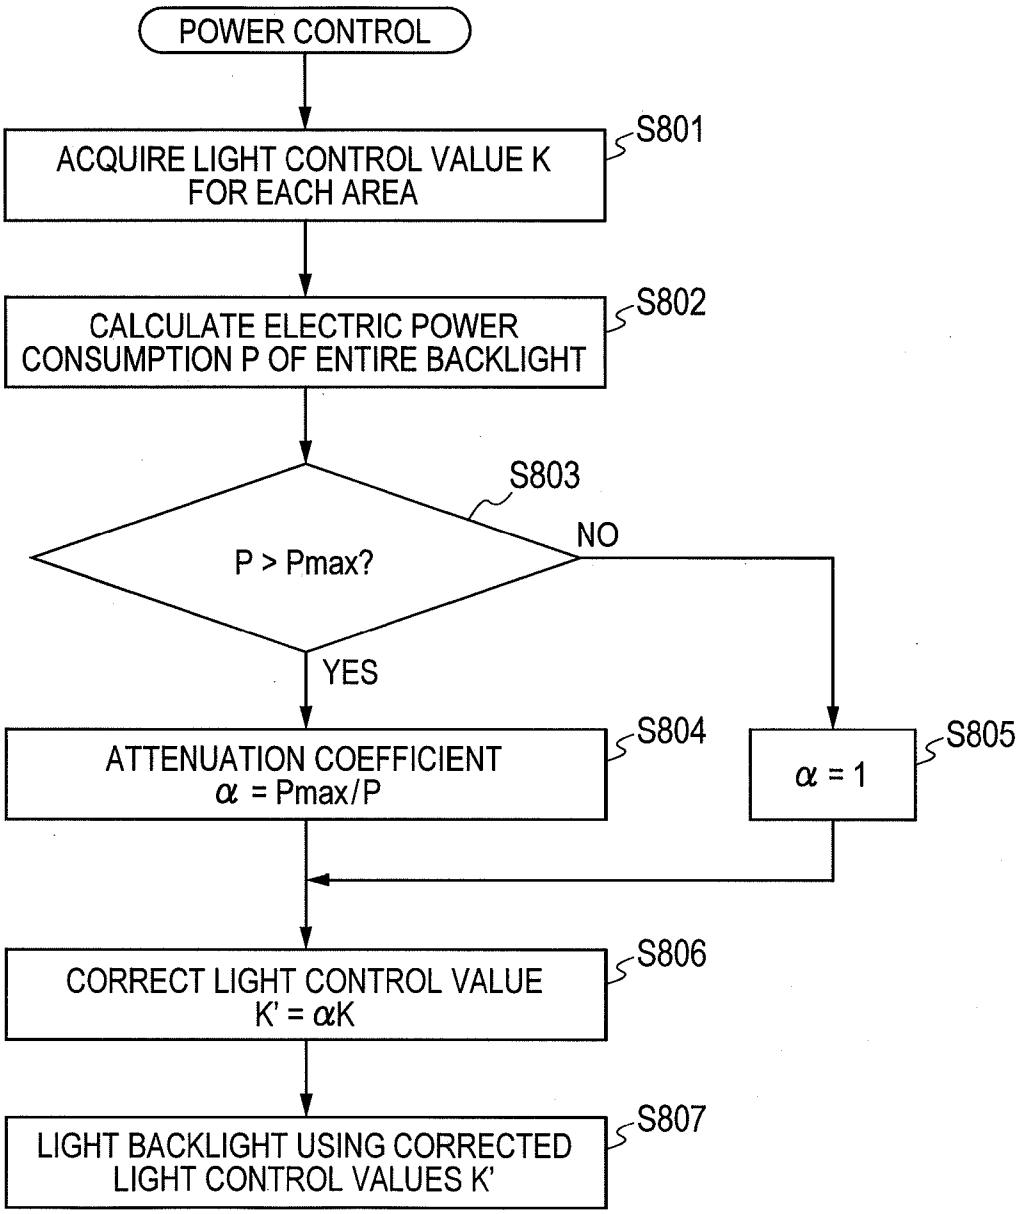
POWER CONTROL
ACQUIRE LIGHT CONTROL VALUE K FOR EACH AREA
S801
CALCULATE ELECTRIC POWER CONSUMPTION P OF ENTIRE BACKLIGHT
S802
S803
P > Pmax?
NO
YES
ATTENUATION COEFFICIENT α = Pmax/P
S804
α = 1
S805
CORRECT LIGHT CONTROL VALUE K' = αK
S806
LIGHT BACKLIGHT USING CORRECTED LIGHT CONTROL VALUES K'
S807

FIG. 9A

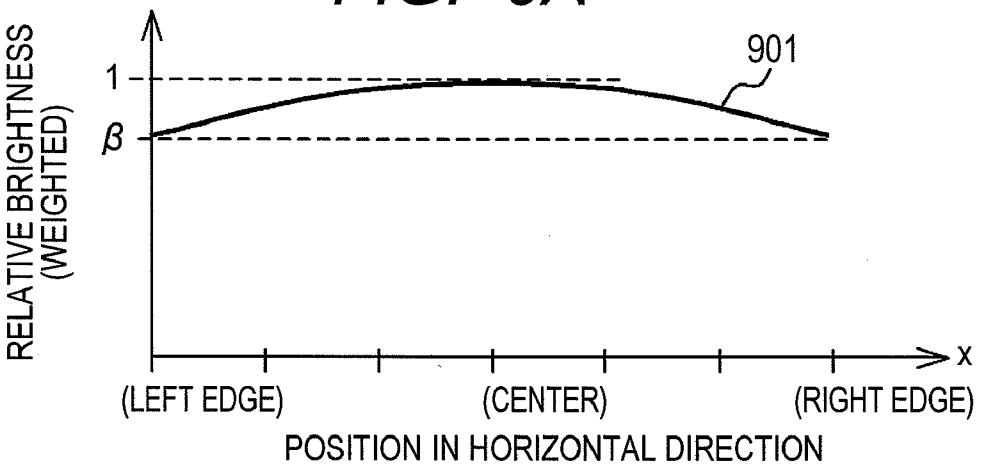
RELATIVE BRIGHTNESS
(WEIGHTED)
1
β
901
x
(LEFT EDGE)
(CENTER)
(RIGHT EDGE)
POSITION IN HORIZONTAL DIRECTION

FIG. 9B

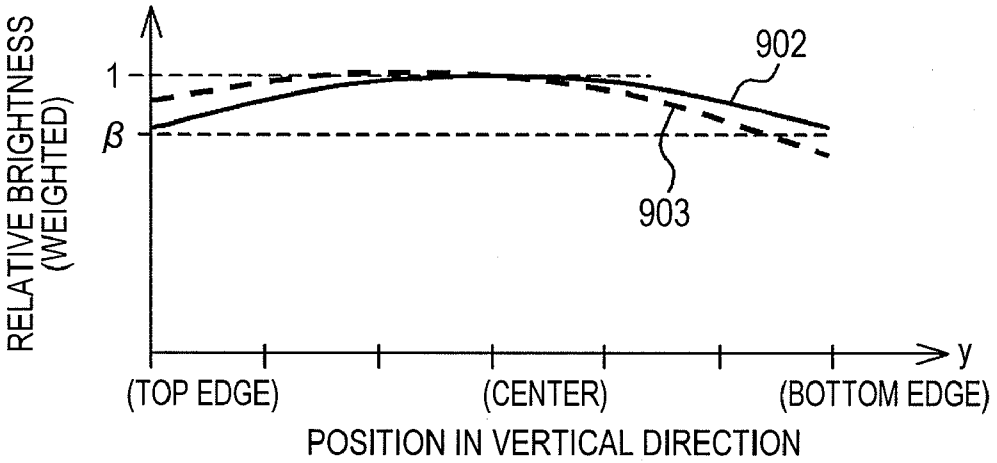
RELATIVE BRIGHTNESS
(WEIGHTED)
1
β
902
903
y
(TOP EDGE)
(CENTER)
(BOTTOM EDGE)
POSITION IN VERTICAL DIRECTION

LIQUID CRYSTAL DISPLAY DEVICE

CLAIM OF PRIORITY

[0001] The present application claims priority from

[0002] Japanese patent application serial No. JP 2010-122957, filed on May 28, 2010, the content of which is hereby incorporated by reference into this application.

BACKGROUND OF THE INVENTION

[0003] 1. Field of the Invention

[0004] The present invention relates to a liquid crystal display device which includes a backlight for illuminating a liquid crystal panel (for displaying images) from behind and executes brightness adjustment of the backlight according to an image signal inputted for the displaying of the images.

[0005] 2. Description of the Related Art

[0006] A liquid crystal display device is equipped with a non-emitting liquid crystal panel (light-transmissive optical modulation element) and a backlight arranged behind the liquid crystal panel to illuminate the panel with light, differently from self-emission display devices (CRT, plasma display panel, etc.). In general, the liquid crystal display device displays images at desired brightness by controlling the optical transmittance of the liquid crystal panel according to the brightness specified by the image signal while making the backlight emit light at a fixed brightness level irrespective of the image signal. Therefore, the electric power consumption of the backlight remains constant without decreasing even when dark images are displayed. This leads to low electric power efficiency of the liquid crystal display device. A technique proposed as a countermeasure against this problem employs variable brightness of the backlight. The technique reduces the electric power consumption while improving the image quality, by controlling the grayscale level of the liquid crystal panel and the brightness of the backlight according to the brightness level (luminance level) of the inputted image signal. There also exists a technique known as "area control" or "local dimming", in which the backlight is segmented into multiple areas and the backlight brightness control is conducted for each of the areas.

[0007] For example, in a liquid crystal display device described in the first embodiment of JP-A-2008-15430, the backlight is segmented into a plurality of areas, the brightest grayscale level in each area in one frame of the inputted image signal is detected in regard to each primary color (R, G, B), and the grayscale levels of the inputted image signal are converted (adjusted) so that the brightest grayscale level equals the upper limit of the grayscale level, while making the backlight blink (at a high frequency) at a duty ratio corresponding to the ratio of the detected brightest grayscale level to the upper limit of the grayscale level during the lighting period of the backlight.

SUMMARY OF THE INVENTION

[0008] The aforementioned area control is capable of minimizing the power consumption of the entire backlight since the power consumption can be optimized for each of the areas. However, the execution of the area control can cause deterioration in the image quality depending on the pattern, design, etc. of the screen (i.e., image displayed on the screen). For example, in a screen in which a small black area (black window area) exists in a white background, the electric power reduction effect is small since the number of areas undergoing the reduction of the backlight brightness is small. Further, a drop in the brightness of a white background area surrounding the black window area becomes pronounced since the light originally leaking from the black window area to the surrounding white background area disappears almost totally. Therefore, it is desirable that the area control be carried out properly according to a "black area" (i.e., the area (size) of black areas (black parts) on the screen.

[0009] Other effects of the backlight control include, for example, prevention of leaking of light between adjoining areas with the use of a spatial filter, reduction of electric power (power consumption) by power control, improvement of visual qualities by shading control, etc.

[0010] Optimum conditions for the quality improvement of the displayed image and the power reduction of the backlight vary depending also on the viewing environment and the image display mode. For storefront or in-store demonstration, for example, high brightness and high image quality should be given priority over power reduction since the illuminance of the surrounding environment is high. In contrast, power reduction should basically be given high priority for viewing at home. Even for home viewing, however, high image quality is desirable for watching movies, etc.

[0011] It is therefore an object of the present invention to provide a liquid crystal display device capable of optimally setting the backlight control according to the viewing environment and the image display mode.

[0012] In accordance with an aspect of the present invention, there is provided a liquid crystal display device comprising a liquid crystal panel and a backlight which illuminates the liquid crystal panel with light, wherein the liquid crystal panel is segmented into a plurality of areas of pixels by dividing the pixels on the panel into a plurality of pixel groups, and the backlight is formed by a plurality of backlight cells corresponding to the areas, respectively. The liquid crystal display device comprises: an area control section which sets a light control value, as a value for individually controlling illumination intensity of each backlight cell, based on a brightness level of an image signal for the area corresponding to the backlight cell; light control value correcting sections which corrects the light control values set by the area control section; and a controller which controls operations of the area control section and the light control value correcting sections. The controller controls the illumination by the backlight by switching the operations of the light control value correcting sections according to an image display mode selected by a user.

[0013] Preferably, the light control value correcting sections include at least two selected from the following: a spatial filter which corrects the light control values so that spatial distribution of the light control values becomes more moderate in consideration of effect of leaking of light between adjoining areas; a black area control section which measures a black area based on the number of pixels whose brightness signal level is a black level threshold value or less, compares the calculated black area with a black area threshold value, and sets a minimum value of the light control value based on result of the comparison; a power control section which calculates power consumption of the backlight and corrects the light control values so that the power consumption does not exceed an electric power limit value; and a shading control section which corrects the light control values so as to rela-

tively lower brightness in a peripheral part of a screen of the liquid crystal panel in comparison with a central part of the screen.

[0014] By the present invention, a liquid crystal display device capable of optimally setting the backlight control according to the viewing environment and the image display mode can be provided.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] These and other features, objects and advantages of the present invention will become more apparent from the following description when taken in conjunction with the accompanying drawings wherein:

[0016] FIG. **1** is a block diagram showing a liquid crystal display device in accordance with an embodiment of the present invention.

[0017] FIG. **2**A is a schematic diagram showing an example of the configuration of a liquid crystal panel.

[0018] FIG. **2**B is a schematic diagram showing an example of the configuration of a backlight.

[0019] FIG. **3** is a schematic cross-sectional view showing an example of the configuration of a backlight cell of the backlight.

[0020] FIG. **4** is a flow chart showing the process flow of backlight control.

[0021] FIG. **5** is a table showing the relationship between image display modes and the backlight control.

[0022] FIGS. **6**A-**6**D are explanatory drawings for explaining the operation of a spatial filter.

[0023] FIGS. **7**A-**7**D are graphs for explaining the operation of a black area control section.

[0024] FIG. **8** is a flow chart showing the operation of a power control section.

[0025] FIGS. **9**A and **9**B are graphs showing the operation of a shading control section.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] Referring now to the drawings, a description will be given in detail of a preferred embodiment in accordance with the present invention.

[0027] FIG. **1** is a block diagram showing a liquid crystal display device in accordance with an embodiment of the present invention. The liquid crystal display device includes an image signal input section **1**, an in-area grayscale value detecting section **2**, a boundary grayscale value detecting section **3**, a brightness level detecting section **4** and a black area detecting section **5**. Feature values of an image signal inputted to the device are detected by the detecting sections **2**-**5**. A backlight light-control section, for generating a control signal (light control values) for a backlight **12**, includes an area control section **6**, a spatial filter **7**, a black area control section **8**, a power control section (APC (Automatic Power Control)) **9** and a shading control section **10**. The backlight **12** is driven by a backlight driving section **11**.

[0028] In order to generate a control signal for a liquid crystal panel **16**, the liquid crystal display device includes a backlight brightness calculating section **13** and an image signal correcting section **14**. The liquid crystal panel **16** is driven by a liquid crystal panel control section **15**. A microcontroller **17**, functioning as a controller, controls the operation of each component while controlling the backlight **12** according to an image display mode selected by the user.

[0029] The backlight **12** is formed by a plurality of light source blocks (backlight cells) each having an LED light source. The backlight cells can be lit at different (independent) brightness levels (backlight brightness). The control signal (light control values) for the backlight **12** is first set by the area control section **6** according to the brightness level (luminance level) of the inputted image signal and thereafter corrected by the spatial filter **7**, the black area control section **8**, the power control section **9** and the shading control section **10** according to the selected image display mode.

[0030] Next, the configuration and operation of each component of the liquid crystal display device of this embodiment will be explained below. FIGS. **2**A and **2**B are schematic diagrams showing an example of the configuration of the liquid crystal panel **16** and the backlight **12**, respectively. The display screen **100** of the liquid crystal panel **16** is segmented into sub-regions (areas) **101** each including a plurality of pixels. In this example, the display screen **100** is segmented into thirty rectangular areas **101** by dividing it into six parts in the horizontal direction and five parts in the vertical direction.

[0031] The illuminating face **200** of the backlight **12** facing the display screen **100** is formed by arranging a plurality of backlight cells **201** in a matrix (six cells in the horizontal direction and five cells in the vertical direction) so that the backlight cells **201** can illuminate corresponding areas **101** of the liquid crystal panel **16** (display screen **100**). Each backlight cell **201** is equipped with an LED light source **202** (a pair of LED light sources **202** in this example) arranged in its upper part. Thus, light intensity levels of the backlight cells **201** are controlled independently in units of backlight cells.

[0032] FIG. **3** is a schematic cross-sectional view showing an example of the configuration of the backlight cell **201**. In FIG. **3**, a cross section taken along a plane parallel to the vertical direction (Y-axis) of the display screen **100** shown in FIG. **2**A and orthogonal to the display screen **100** is shown. The backlight cell **201** is equipped with the LED light source (s) **202**, a light guide plate **203** and a reflecting plate **204**. Light emitted from the LED light source **202** is incident upon an end face (left end in FIG. **3**) of the light guide plate **203**. The light guide plate **203** outputs the incident light toward the liquid crystal panel **16** (upward in FIG. **3**) as indicated with arrows. The light guide plate **203** has a wedge-shaped cross section with its thickness gradually decreasing from the light inlet end to a tip (right end in FIG. **3**) opposite to the light inlet end. This shape allows the light guide plate **203** (from the light inlet end to the tip) to output the light upward. The reflecting plate **204** arranged at the back of the light guide plate **203** reflects the incident light (entering and traveling through the light guide plate **203**) upward with high efficiency. Incidentally, while an LED of the so-called side view type (emitting light in a direction parallel to its electrode surface) is employed as the LED light source **202** in this embodiment, the LED light source **202** may also be implemented by an LED of the top view type (emitting light in a direction orthogonal to its electrode surface).

[0033] Next, control systems for the liquid crystal panel **16** and the backlight **12** will be explained below. The in-area grayscale value detecting section **2** detects the grayscale level of the inputted image signal in regard to every pixel belonging to one area **101** and thereby obtains an in-area maximum grayscale level of the area **101**, for each of the areas **101** forming the liquid crystal panel **16** (display screen **100**). The boundary grayscale value detecting section **3** detects the grayscale level of the inputted image signal in regard to every pixel

belonging to a boundary part of one area **101** (adjoining neighboring areas) and thereby obtains a boundary part maximum grayscale level of the area **101**, for each of the areas **101** forming the liquid crystal panel **16** (display screen **100**).

[0034] The brightness level detecting section **4** detects a maximum brightness level of each area from the values of the in-area maximum grayscale level and the boundary part maximum grayscale level of the area. It is also possible to detect an average brightness level (APL (Average Picture Level)) of each area instead of the maximum brightness level and execute the subsequent process based on the average brightness level. Meanwhile, the black area detecting section **5** compares a brightness signal level (luminance signal level) of each of the pixels in the display screen with a black level threshold value, obtains the number of pixels whose brightness signal level is the threshold value or less, and measures a black display area ("black area") from the ratio of the obtained number of pixels to the total number of pixels in the screen.

[0035] The area control section **6** sets illumination intensity of each backlight cell **201** (for each area) based on the maximum brightness level of each area detected by the brightness level detecting section **4** (area control). Specifically, the area control section **6** sets a control value as a backlight driving signal (hereinafter referred to as a "light control value") so that the backlight brightness will be at a level proportional to the maximum brightness level. Further, the area control section **6**, including the spatial filter **7** and the black area control section **8**, corrects the light control values (for the areas) which has been set as above.

[0036] The spatial filter **7** corrects the light control values for the areas so that spatial distribution of the light control values becomes more moderate (spatial filter control) in consideration of the effect of leaking of light between adjoining areas. In other words, the spatial filter **7** changes the intensity of the area control.

[0037] The black area control section **8** compares the black area detected by the black area detecting section **5** with a black area threshold value and sets a minimum value (lower limit value) of the light control value based on the comparison. Specifically, when the black area is smaller than the black area threshold value, the light control values of all the areas are set at the maximum (area control: OFF). When the black area is larger than the black area threshold value, the minimum value of the light control values is set corresponding to the black area (black area control). Further, flicker is prevented by use of a time filter (although not shown in FIG. **1**). Specifically, when the difference in the light control value between frames exceeds a threshold value, the change (difference) is suppressed by the time filter.

[0038] The power control section (APC) **9** occasionally calculates the electric power consumption of the entire backlight and controls the light control values so that the power consumption does not exceed a limit value (threshold value). When the power consumption exceeds the threshold value, the power control section **9** uniformly lowers the light control values of all the areas (power control). The shading control section **10** executes a process of reducing the light control values of backlight cells **201** for the peripheral part of the screen by a prescribed amount (shading control) so as to relatively lower the brightness in the peripheral part of the screen in comparison with the central part of the screen.

[0039] The backlight driving section **11** receives the light control value for each area and controls the brightness of each backlight cell **201** (LED light source **202**) corresponding to each area. For the brightness adjustment of the LED light source **202**, PWM (Pulse-Width Modulation) and amplitude control may be used. In the PWM control, the duty ratio is set so that it reaches 100% when the brightness is at the maximum. The duty ratio is varied corresponding to the light control value.

[0040] The backlight brightness calculating section **13** calculates backlight brightness on the display screen based on the light control values for the areas outputted by the area control section **6**. The backlight brightness at an arbitrary point A on the screen is obtained by first figuring out the brightness value at the point A in each case where only one backlight cell **201** for each area is lit at the light control value for the area and then calculating the sum of the brightness values of all the cases (total brightness when all the backlight cells **201** are lit).

[0041] The image signal correcting section **14** corrects the image signal (grayscale value) for each pixel based on the backlight brightness B calculated by the backlight brightness calculating section **13**. This correction is made by multiplying the image signal (grayscale value) by a correction coefficient Bmax/B, where "Bmax" represents the backlight brightness when the backlight cells of all the areas are lit at the maximum light control value.

[0042] The liquid crystal panel control section **15** generates a display control signal based on the corrected image signal and horizontal and vertical synchronization signals inputted thereto. A display signal and a scan signal (as the display control signal) are outputted to the liquid crystal panel **16** from an H-driver and a V-driver of the liquid crystal panel control section **15**, respectively. The liquid crystal panel **16** receiving the display signal and the scan signal applies a grayscale voltage corresponding to the display signal to each corresponding pixel area and thereby controls the liquid crystal optical transmittance in each pixel area.

[0043] Incidentally, detailed operation of the spatial filter **7**, the black area control section **8**, the power control section **9** and the shading control section **10** for correcting the backlight control values (light control value) will be described later.

[0044] FIG. **4** is a flow chart showing the process flow of the backlight control in this embodiment. In step S**401**, the micro-controller **17** receives the user's selection of the image display mode. In step S**402**, the micro-controller **17** sends a control switching signal corresponding to the selected image display mode to each processing section for the backlight control. Selectable image display modes may include an "in-store demonstration (supermarket) mode", a "power reduction (standard) mode", a "high image quality (cinema) mode", etc.

[0045] In step S**403**, the image signal is inputted to the image signal input section **1**. Thereafter, the following process is executed for each frame. In step S**404**, the brightness level detecting section **4** detects the maximum brightness level of each area. As mentioned above, it is also possible to detect an average brightness level (APL (Average Picture Level)) of each area instead of the maximum brightness level and execute the following process based on the average brightness level.

[0046] In step S**405**, the area control section **6** calculates the light control value (backlight control value) for each area (hereinafter referred to as an "initial light control value"). The initial light control values for the areas are determined so that the backlight brightness of each area becomes proportional to

the maximum brightness level of the area. In step S**406**, the black area detecting section **5** compares the brightness signal level (luminance signal level) of each of the pixels in the screen with the black level threshold value (in regard to the whole of the inputted screen image (one frame)) and measures the ratio of the black area to the entire screen (%) based on the number of pixels whose brightness signal level is the threshold value or less.

[0047] In step S**407**, the black area control section **8** compares the black area detected by the black area detecting section **5** with the black area threshold value and sets the minimum value (lower limit value) of the light control value based on the comparison. When the black area is smaller than the black area threshold value, the light control values of all the areas are set at the maximum (area control: OFF). When the black area is larger than the black area threshold value, the minimum value of the light control values is set corresponding to the black area (black area control). This black area control (S**407**) is executed according to the control switching signal supplied from the micro-controller **17** in the step S**402**. According to the control switching signal, whether the black area control (step S**407**) should be executed or not (ON/OFF) is switched and the black area threshold value (when the black area control is executed) is set. In cases where the black area control is OFF, the step S**407** is skipped.

[0048] In step S**408**, the spatial filter **7** corrects the light control values of the areas so that spatial distribution of the light control values becomes more gradual between areas (spatial filter control). This spatial filter control (S**408**) is also executed according to the control switching signal supplied in S**402**. According to the control switching signal, the control level (HIGH/MIDDLE/LOW) of the spatial filter (S**408**) is switched. Incidentally, the control level "HIGH (STRONG)" means to make (leave) the spatial distribution of the light control values sharp, while "LOW (WEAK)" means to moderate the spatial distribution of the light control values.

[0049] In step S**409**, the power control section **9** occasionally calculates the power consumption of the entire backlight and controls the light control values so that the power consumption does not exceed the limit value (threshold value). When the power consumption exceeds the threshold value, the power control section **9** uniformly lowers the light control values of all the areas (power control). This power control (S**409**) is also executed according to the control switching signal supplied in S**402**. According to the control switching signal, whether the power control (S**409**) should be executed or not (ON/OFF) is switched and the limit value (when the power control is executed) is set. In cases where the power control is OFF, the step S**409** is skipped.

[0050] In step S**410**, the shading control section **10** reduces the light control values of the backlight cells for the peripheral part of the screen by a prescribed amount in comparison with the central part of the screen (shading control). This shading control (S**410**) is also executed according to the control switching signal supplied in S**402**. According to the control switching signal, whether the shading control (S**410**) should be executed or not (ON/OFF) is switched and the amount of reduction of the light control values (when the shading control is executed) is set. In cases where the shading control is OFF, the step S**410** is skipped.

[0051] In step S**411**, final light control values for the areas of the backlight are determined. The backlight is driven according to the final light control values.

[0052] Meanwhile, in step S**412**, the backlight brightness calculating section **13** calculates the backlight brightness on the display screen based on the light control values of the areas after undergoing the spatial filter control of S**408**. In step S**413**, the image signal correcting section **14** corrects the image signal (grayscale value) of each pixel based on the backlight brightness calculated in S**412**. The corrected image signal is used for generating the display signal (display control signal) for the liquid crystal panel **16**.

[0053] FIG. **5** is a table showing the relationship between the image display mode and the backlight control. Examples of combinations of backlight control functions that should be executed for each image display mode selected by the user are shown in FIG. **5**. In this example, the user is allowed to select a desired image display mode from three options: (a) in-store demonstration (supermarket) mode, (b) power reduction (standard) mode and (c) high image quality (cinema) mode. Meanwhile, the backlight control functions include (1) spatial filter control, (2) black area control, (3) power control and (4) shading control. The switching (ON/OFF, HIGH/MIDDLE/LOW) of each backlight control function is executed in conjunction with the selection of the image display mode by the user. The threshold value, limit value, etc. used in the control functions can be selected by the user.

[0054] Concrete examples of the switching of the control will be explained below. In the in-store demonstration mode (a), it is desirable to maximize the brightness of the display screen since the illuminance of the surrounding environment is high. Therefore, the power control and the shading control are set to OFF. Incidentally, it is also possible to set the shading control to ON while increasing the backlight power consumption in the in-store demonstration mode. In the power reduction mode (b), high priority is given to the reduction of power consumption. Therefore, the power control and the shading control are set to ON while setting the black area control to OFF. In this mode, the user is allowed to select the threshold value, etc. of the power control and the shading control (i.e., the amount of electric power saving). In the high image quality mode (c), high priority is given to the image quality such as the brightness and the contrast of the display screen. Therefore, it is effective to suppress the so-called "black floating" (phenomenon (graying of black) specific to liquid crystal displays) by setting the spatial filter control at HIGH (or MIDDLE) (see the definition of "HIGH" given in the explanation of the step S**408** of FIG. **4**).

[0055] By the control described above, each backlight control function is optimized according to the image display mode selected by the user, realizing image display suitable for the purpose of the display. Incidentally, the combinations of control functions shown in FIG. **5** are just an example for illustration. The conditions for the control may be changed according to the viewing environment, etc. While the above image display modes selectable by the user have been explained as an example, it is also possible to add an illuminance sensor to the liquid crystal display device and make the device automatically control the backlight according to the surrounding environment (illuminance). For example, when the surrounding environment (e.g., illumination in the room in which the liquid crystal display device is placed) is bright, the power control and the shading control may be automatically set to OFF so as to keep the displayed images bright and easy to see. When the surrounding environment is dark, the power control and the shading control may be automatically

set to ON since the need of keeping the images bright is lower compared to the cases where the surrounding environment is bright.

[0056] As above, by this embodiment in which the mode of the area control executed by the backlight light-control section is switched and controlled according to the instruction by the user and/or the surrounding environment, the power consumption of the backlight can be reduced while realizing the displaying of high quality images.

[0057] In the following, the spatial filter control, the black area control, the power control and the shading control, which have been taken as examples of the backlight control functions, will be explained in more detail. FIGS. **6**A-**6**D are explanatory drawings for explaining the operation of the spatial filter **7**. First, distribution of the light emitted from the backlight (backlight cell) will be explained. While the light emitted from a backlight cell basically illuminates the area corresponding to the backlight cell, not 100% of the light illuminates the corresponding area, that is, some of the emitted light leaks out to adjacent areas due to the structure of the backlight. For example, 80% of the light emitted from a backlight cell (at the center) illuminates the corresponding area and the remaining 20% leaks out to adjacent areas (upward, downward, rightward and leftward) as in the screen **600***a* shown in FIG. **6**A. When all the backlight cells are lit at the maximum brightness, each area (evenly exchanging the leaking light with each adjacent area) is capable of maintaining its brightness at 100%. However, in the area control in which the backlight cell brightness differs among the areas, the brightness of an image (symbol, figure, etc.) displayed on the screen is affected by areas surrounding the image.

[0058] For example, in a case where a bright image **601** exists at the center of a dark background image **602** as in the screen **600***b* shown in FIG. **6**B, executing ordinary area control to the backlight results in the screen **600***c* shown in FIG. **6**C. In the central area **603**, the backlight brightness is set high according to the bright image **601** while setting the backlight brightness low for the surrounding areas **604**. Consequently, the amount of light leaking from the surrounding areas **604** to the central area **603** decreases and the image **601** in the central area **603** gets darker than its original brightness.

[0059] The spatial filter **7** is used as a countermeasure against this phenomenon. In the screen **600***d* shown in FIG. **6**D, the backlight brightness for the surrounding areas **604** is also increased equivalently to the central area **603**. Consequently, the amount of light leaking from the surrounding areas **604** to the central area **603** increases, by which the brightness of the image **601** in the central area **603** can be made close to the original brightness. The spatial filter **7** executes this process. Specifically, the spatial filter **7** adds up the amounts of the light leak from the surrounding areas to the area by use of area coefficients (representing the amount of the light leak between adjoining areas) and thereby corrects the light control values so that the backlight brightness of the area equals a desired value. In other words, the spatial filter **7** executes a process of moderating the brightness difference between adjoining areas to the backlight brightness distribution among the areas. The control level of the spatial filter **7** can be selected from and switched among the aforementioned three levels STRONG, MIDDLE and WEAK (HIGH, MIDDLE and LOW). The screen **600***c* (FIG. **6**C) represents a case where the control level is "STRONG", while the screen **600***d* (FIG. **6**D) represents a case where the control level is "WEAK" (see the definition of the control levels given in the explanation of the step S**408** of FIG. **4**).

[0060] FIGS. **7**A-**7**D are graphs for explaining the operation of the black, area control section **8**. The black area control section **8** controls the intensity of the area control according to the black area detected by the black area detecting section **5**. Specifically, the black area control section **8** compares the black area S with the black area threshold value S0 and sets the lower limit of the light control value (minimum light control value Kmin) of the backlight based on the comparison. If the black area S is less than the black area threshold value S0, the maximum value permissible for the light control value is given as the minimum light control value Kmin (case A). If the black area S is the threshold value S0 or more, an intermediate light control value previously set corresponding to the black area S is given as the minimum light control value Kmin (case B). If the black area S corresponds to the entire screen (approximately 100%), a light control value for "all black" is given as the minimum light control value Kmin (case C). Incidentally, the black area threshold value S0 and the intermediate light control value used in the case B may be changed (switched) in conjunction with the selection of the image display mode by the user.

[0061] By the above setting of the minimum light control value Kmin, when the black area is small as in the case A, the light control values of all the areas area set at the maximum light control value (maximum value of the backlight brightness) (area control: OFF), by which the image is displayed with the original brightness. In contrast, when the black area increases as in the case B and case C, electric power reduction can be achieved by intensifying the area control by lowering the minimum light control value Kmin.

[0062] FIG. **8** is a flow chart showing the operation of the power control section **9**. The power control section **9** calculates the power consumption of the entire backlight and controls the light control values so that the power consumption does not exceed the limit value. In step S**801**, the light control value K of each backlight cell (light source block) for each area is acquired. In step S**802**, the electric power P consumed by the entire backlight is calculated. In cases where the power consumption of each light source block is proportional to its light control value, the power consumption P of the entire backlight can be calculated by adding up the light control values K of all the light source blocks. Even when the proportionality does not hold between the power consumption and the light control value of each light source block, the power consumption P of the entire backlight can be calculated by first calculating the power consumption of each light source block using a relational expression between the power consumption and the light control value and then summing up the calculated power consumptions.

[0063] In step S**803**, the calculated power consumption P is compared with the limit value (threshold value) Pmax. When the power consumption P exceeds the threshold value Pmax (S**803**: YES), the process advances to step S**804** and an attenuation coefficient a for the light control value K is obtained (e.g., α=Pmax/P). When the power consumption P is the threshold value Pmax or less (S**803**: NO), the process advances to step S**805** and the attenuation coefficient a is set at 1 (α=1).

[0064] In step S**806**, the light control value K for each area is corrected by uniformly multiplying the light control value K by the attenuation coefficient α (corrected light control value K'=αK). In step S**807**, the backlight is lit using the

corrected light control values K' for the areas (using the original light control values K when the power consumption P is the threshold value Pmax or less). By this process, the power consumption of the backlight can be limited within the threshold value Pmax.

[0065] By repeatedly executing the above process as needed (for each frame, for example) the power consumption can be kept within the threshold value Pmax even when the input image changes abruptly. Incidentally, the threshold value Pmax may be set variably according to the intended amount of electric power saving.

[0066] FIGS. **9**A and **9**B are graphs showing the operation of the shading control section **10**. In FIGS. **9**A and **9**B, distribution of the brightness on the display screen after the shading process is shown, wherein the reference numeral "**901**" (FIG. **9**A) represents the brightness distribution in the horizontal direction (X direction) of the screen and "**902**" (FIG. **9**B) represents the brightness distribution in the vertical direction (Y direction) of the screen. In either direction, the correction (shading process) is made so that the brightness in the peripheral part of the screen (right and left edges, top and bottom edges) becomes relatively lower than that in the central part of the screen. The shading process has the effects of enhancing the presence of displayed images adapting to visual properties of the human (placing his/her effective visual field in the central part of the screen) and reducing the electric power (power consumption). This process may be conducted by making a weighting correction to the backlight brightness distribution (distribution of the light control values) obtained by the area control so as to reduce the relative brightness of the peripheral part of the screen to $\beta(<1$ on the assumption that the relative brightness equals 1 in the central part). Since the power consumption of the backlight is reduced by the execution of the shading control, the intensity of the shading (β) can be represented by the amount of reduction of the power consumption. Incidentally, when the backlight cell **201** of the edge light type shown in FIG. **3** is employed for the backlight, the brightness distribution of the light emitted from the backlight cell **201** becomes asymmetrical depending on the position of the LED light source(s) **202** in the backlight cell (darker on the LED light source's side). Consequently, in the case where the backlight cells **201** are arranged as shown in FIG. **2**B, the brightness distribution becomes asymmetrical in the vertical direction of the screen even when all the backlight cells **201** are lit at the same brightness (darker in the upper part of the screen). Therefore, by making a correction to the aforementioned weighting correction in the vertical direction (Y direction) of the screen as indicated with the reference numeral "**903**" (broken line) so as to eliminate the asymmetry, symmetry of the brightness distribution in the vertical direction can be achieved. In the arrangement shown in FIG. **2**B, the weighting correction in the horizontal direction (X direction) of the screen (indicated with the reference numeral "**901**" (solid line)) needs no further correction since the brightness distribution in the horizontal direction is symmetrical from the outset.

[0067] As described above, by the configuration of the above embodiment, each backlight control function is optimized according to the image display mode selected by the user, realizing image display suitable for the purpose of the display. Incidentally, while the spatial filter control, the black area control, the power control and the shading control have been taken as examples of the backlight control functions in the above description, the combination of the backlight control functions is just a specific example. The combination may be changed properly according to the viewing environment, etc.

[0068] While the backlight light-control section (including the area control section **6**, spatial filter **7**, black area control section **8**, power control section **9** and shading control section **10**) and the micro-controller **17** (as the controller for controlling the backlight light-control section) are implemented as separate circuit elements in the above embodiment, it is also possible to integrate the backlight light-control section and the micro-controller **17** (and the detecting sections **2**, **3** and **5**) into one integrated circuit.

What is claimed is:

1. A liquid crystal display device comprising a liquid crystal panel and a backlight which illuminates the liquid crystal panel with light, wherein:

the liquid crystal panel is segmented into a plurality of areas of pixels by dividing the pixels on the panel into a plurality of pixel groups, and

the backlight is formed by a plurality of backlight cells corresponding to the areas, respectively, and

the liquid crystal display device comprises a backlight light-control section which executes area control for independently controlling illumination intensity of each backlight cell based on a brightness level of an image signal for the area corresponding to the backlight cell and a controller which controls the backlight light-control section, and

the backlight light-control section has multiple area control modes, and

the controller controls the backlight light-control section to switch the area control mode according to an image display mode selected by a user.

2. A liquid crystal display device comprising a liquid crystal panel and a backlight which illuminates the liquid crystal panel with light, wherein:

the liquid crystal panel is segmented into a plurality of areas of pixels by dividing the pixels on the panel into a plurality of pixel groups, and

the backlight is formed by a plurality of backlight cells corresponding to the areas, respectively, and

the liquid crystal display device comprises:

an area control section which sets a light control value, as a value for individually controlling illumination intensity of each backlight cell, based on a brightness level of an image signal for the area corresponding to the backlight cell;

light control value correcting sections which corrects the light control values set by the area control section; and

a controller which controls operations of the area control section and the light control value correcting sections, and

the controller controls the illumination by the backlight by switching the operations of the light control value correcting sections according to an image display mode selected by a user.

3. The liquid crystal display device according to claim **2**, wherein:

the light control value correcting sections include at least two selected from the following:

a spatial filter which corrects the light control values so that spatial distribution of the light control values becomes more moderate in consideration of effect of leaking of light between adjoining areas;

a black area control section which measures a black area based on the number of pixels whose brightness signal level is a black level threshold value or less, compares the calculated black area with a black area threshold value, and sets a minimum value of the light control value based on result of the comparison;

a power control section which calculates power consumption of the backlight and corrects the light control values so that the power consumption does not exceed an electric power limit value; and

a shading control section which corrects the light control values so as to relatively lower brightness in a peripheral part of a screen of the liquid crystal panel in comparison with a central part of the screen.

4. The liquid crystal display device according to claim **3**, wherein the controller sets the black area threshold value of the black area control section, the electric power limit value of the power control section or a power reduction value of the shading control section according to selection by the user.

5. The liquid crystal display device according to claim **2**, wherein the image display modes selectable by the user include an in-store demonstration mode, a power reduction mode and a high image quality mode.

6. The liquid crystal display device according to claim **2**, further comprising an illuminance sensor which detects illuminance around the device,

wherein the controller controls the illumination by the backlight by switching the operations of the light control value correcting sections according to the illuminance detected by the illuminance sensor.

* * * * *